Ex no 8 1/10/25

Practical - 8 (a)

Aim:

To discover live host using NMap scans (ARP, ICMP, TCP/UDP) on tryhackme platform room link

Introduction:

When targetting a network, we need a efficient tool to handle repetitive tasks

This room is first of four in Nmap series. These four rooms are also part of the Network Security Module


* Nmap live host Discovery
* Nmap basic port scans
* Nmap Advanced port scans

ARP Scan: This scan uses ARP requests to discover live hosts

ICMP Scan: This scan uses ICMP requests to identify live hosts


TCP/UDP Ping scan: This scan sends packets to TCP ports and UDP ports to determine live hosts

SubNetworks

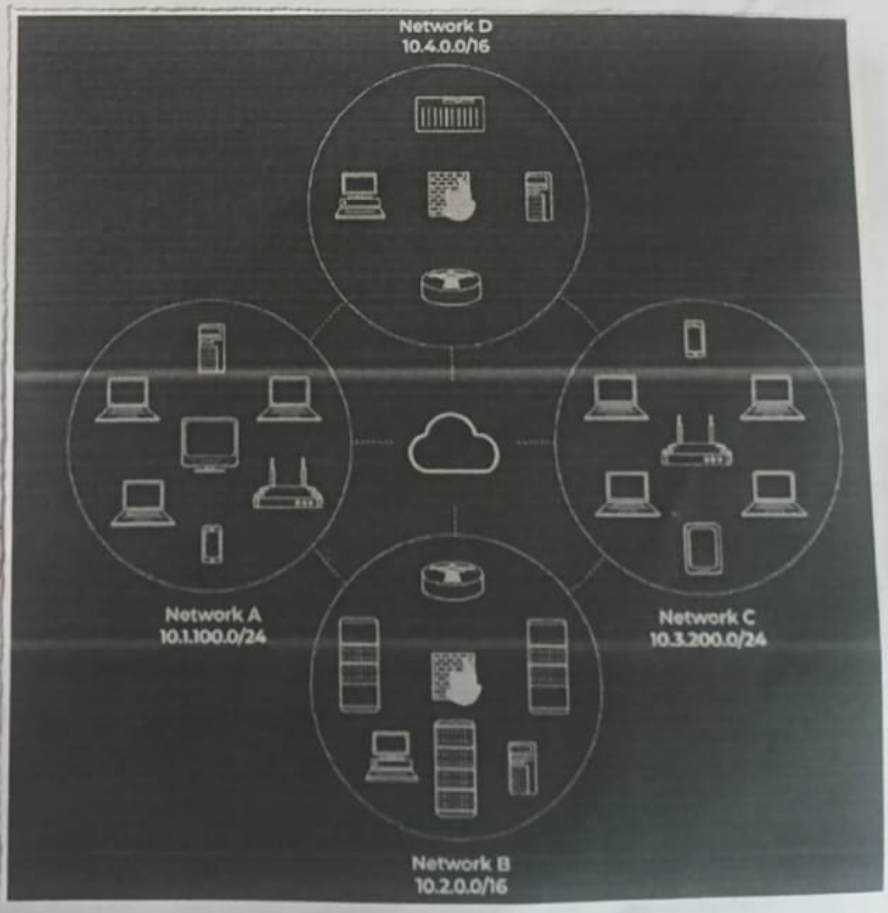

The figure displays 2 types of subnets

* lib subnets * lan subnets

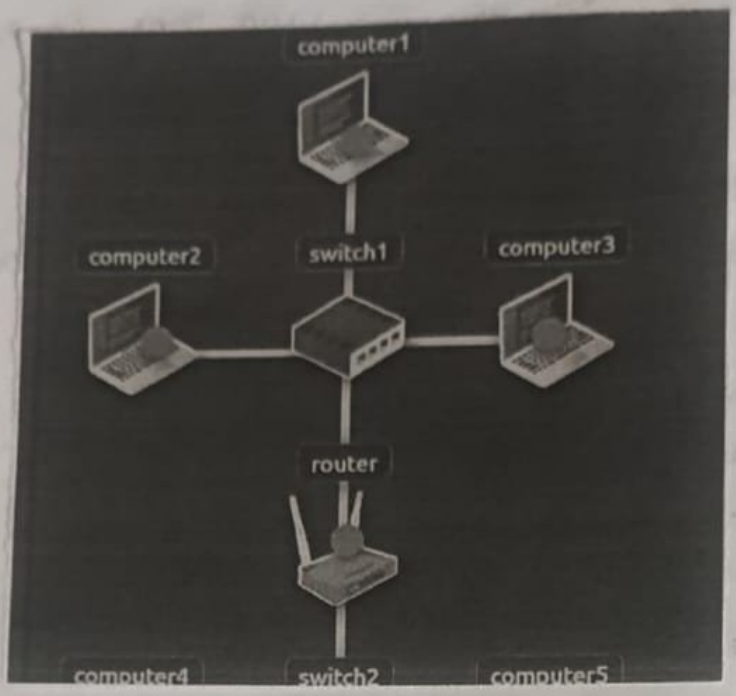

From computer 1 to computer 1

a packet type : "ARP Required"

Send Packet

From:

computer1

To:

computer1

Packet Type:


arp_request

Data:

computer6


Send Packet

* from computer 4 to computer 4
* packet type : "ARP Required"

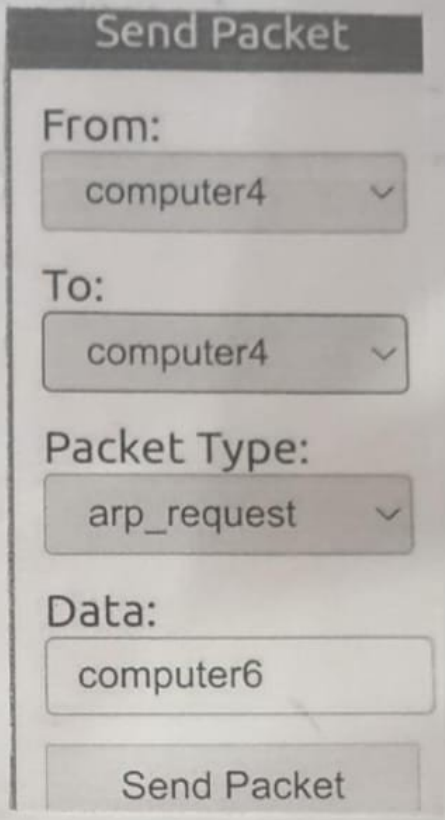


Nmap Host discovery using ARP :

When a privileged user tried to scan targets on local networks Nmap uses ARP required

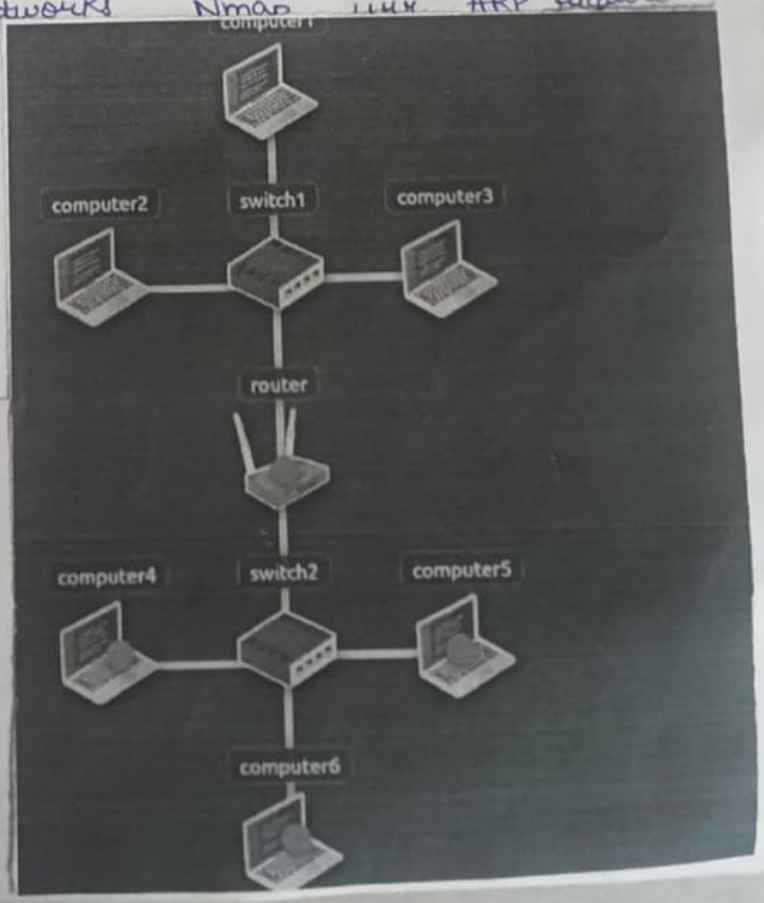

Nmap host discovery using ICMP:

A simple method to identify live host on target network is by bringing each IP address and checking for response.

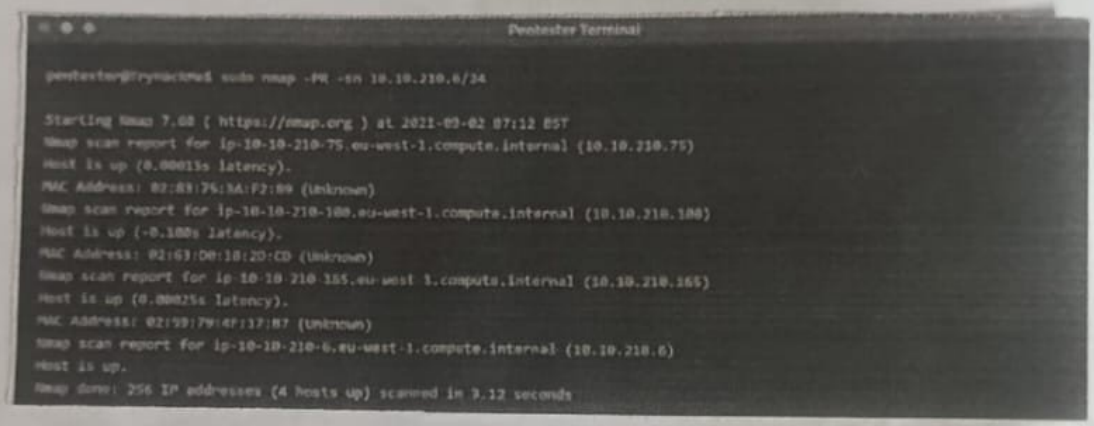

UDP Ping

While sending UDP packets to open UDP ports may not trigger a response. Sending them to closed UDP port

Result:


The experiment has been completed successfully

Ex. no 8 1/10/26

Experiment. 8(b)


AIM:

Configuration of wireless LAN using CISCO packet tracer. Design a topology with three PC connected for Linksys wireless

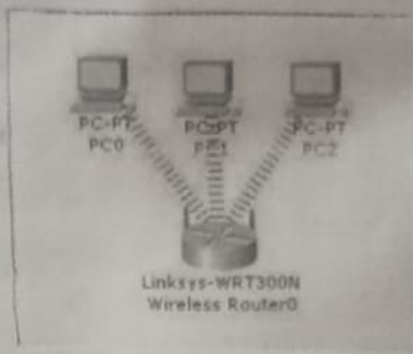


Procedure:


Step 1: Click on wireless router. select admin tab from top menus

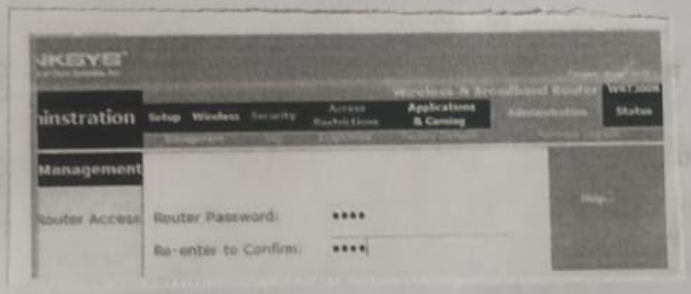


Step 2: Now select wireless security & change security mode to WEP

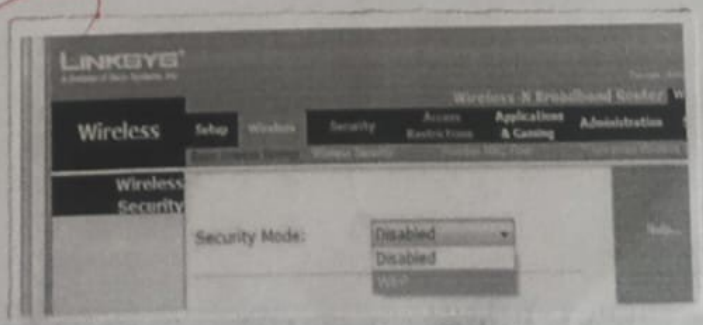

Step 3: Set Key : 0123456789

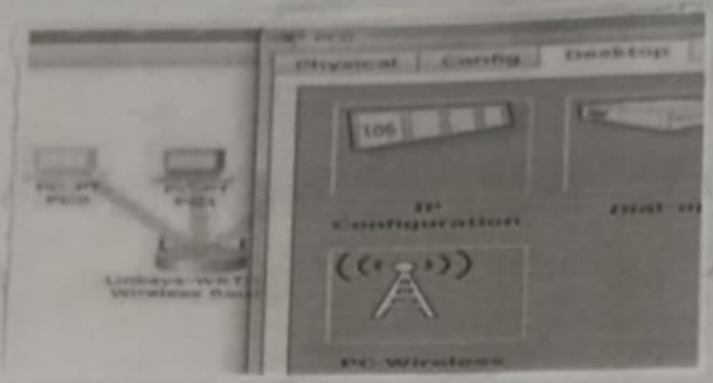

Step 4: Connect PCs from Wireless router

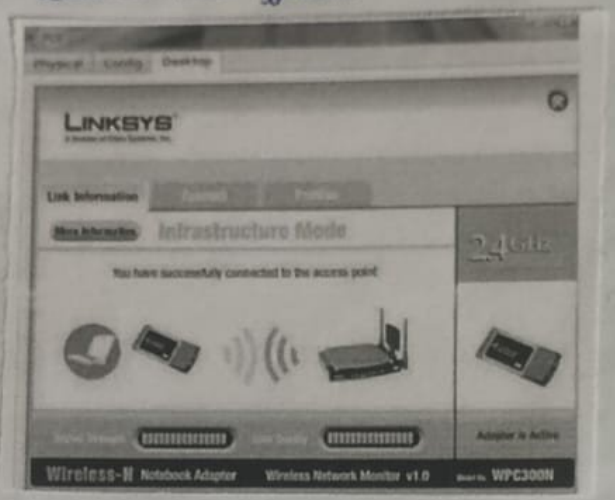

Step 5: Click on connect tab and click on reprogent button

Result

The configuration has been completed successfully.