Ex.no.9 1/10/26

Experiment - 9 Subnetting in Cisco Packet tracer

Aim:

Implementation of subnetting in cisco packet trace simulator

classes IP subnetting is a technique that allows for more effecient use of IP address by allowing to subnet mask

Creating a network topology :

To create a network topology in packet trac select "New" button in top, then select network & generic

Adding the device :

To add a device select the device from bottom left and drag it onto network topology


Subnetting

To subnet the network address of 192.168.1.0/2 to provide enough space for atleast 5 address for end devices switch and routers

Configuring the devices

Right click on routers and select "CLI" it will open by configuring the Router. Right click CLI Enter following commands

enable
Interface FastEthernet 0/0
IP address [IP address] [subnet mask]
no shutdown
exit
Interface fast Ethernet 0/1
#IP address [IP address] [subnet mask]
no shutdown exit

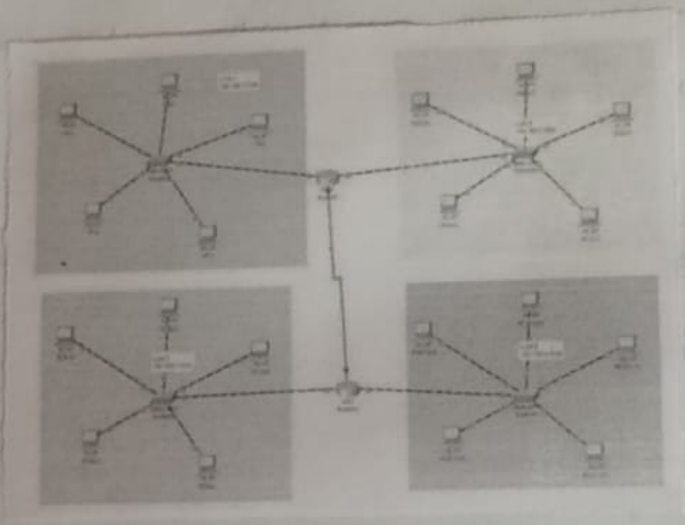

Results:

The implementation has been completed successfully