
Question 1 PART I

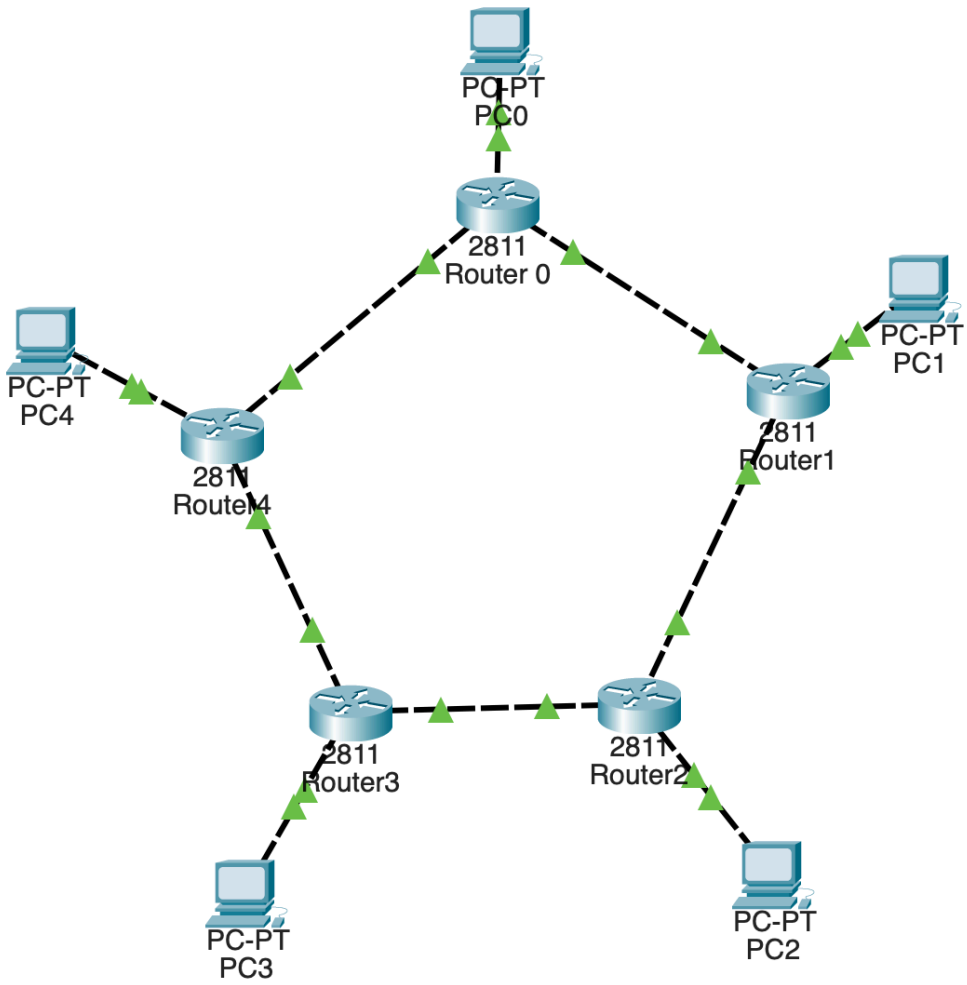

Emulate the network diagram provided above on cisco packet tracer. Follow the table below for IP address configuration for the interface as well as the edge devices (PCs)

Router	**Interface to PC**	**IP address**	**Interface to Next Router**	**IP address**
R0	Fa0/0	192.168.1.1/24	Fa1/0	10.0.1.1/24
R1	Fa0/0	192.168.2.1/24	Fa1/0	10.0.2.1/24
R2	Fa0/0	192.168.3.1/24	Fa1/0	10.0.3.1/24
R3	Fa0/0	192.168.4.1/24	Fa1/0	10.0.4.1/24
R4	Fa0/0	192.168.5.1/24	Fa1/0	10.0.5.1/24

PC	IP address	Subnet Mask	Default Gateway
PC0	192.168.1.2/24	255.255.255.0	192.168.1.1
PC1	192.168.2.2/24	255.255.255.0	192.168.2.1
PC2	192.168.3.2/24	255.255.255.0	192.168.3.1
PC3	192.168.4.2/24	255.255.255.0	192.168.4.1
PC4	192.168.5.2/24	255.255.255.0	192.168.5.1

On completion of this configuration, from the terminal of PC0, ping all the other PC's and test if the connections are functional. You are expected to use static routing in your solution.