
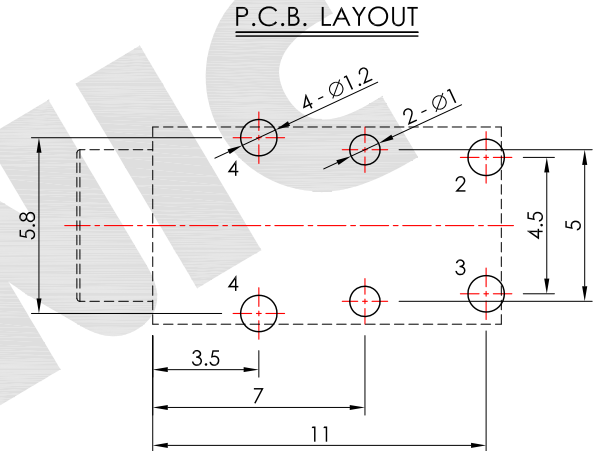
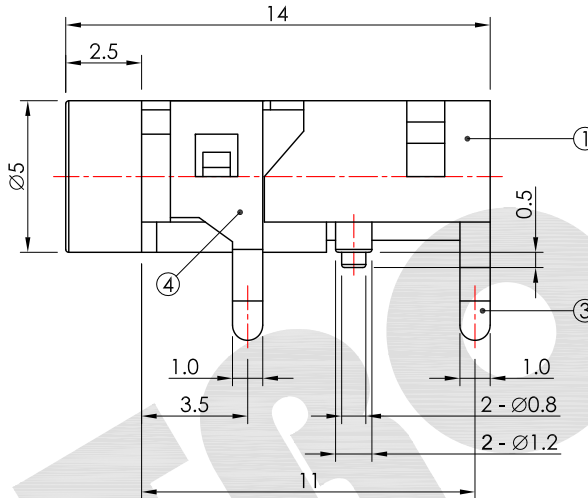




*開關產品未經SWITRONIC同意，請勿拆解，否則無法負品質及安全責任。
Please do not decompose the switch without any permission from SWITRONIC,
otherwise the quality and safety responsibility could not be guaranteed.

*本圖面若與目錄之規格尺寸不符，以本圖面規格尺寸為主。
Below is our main specification if different from catalog.

RoHS compliant

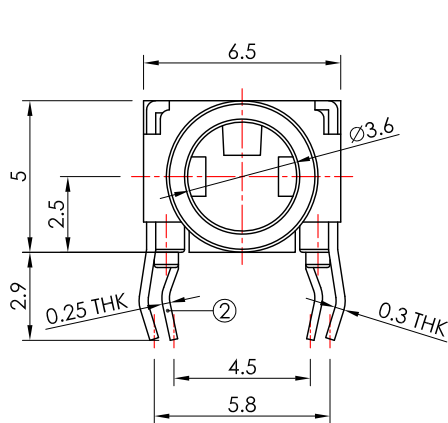

SCHEMATIC

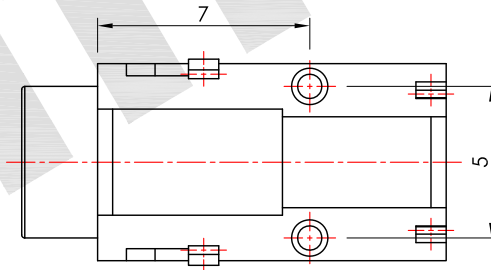

SPECIFICATION

Rating: 0.3A 30V DC.
Contact resistance: 100mΩ Max.(initial)
Insulation resistance: 100MΩ Min. at 500V DC.
Withstand voltage: 500V AC for 1 minute.
Operating temperature: -16°C ~ +60°C.
Life: 5,000 Cycles.
Soldering temperature: 230°C Max. for 2±0.5 sec.
Soldering time: 1 time only.
Note1: Unwashable, don't be immersed by epoxy and organic solvent.
Note2: Please check the actual size, do not scale the drawing page.

MATERIAL

Case: PBT, Black. ①
Contact: PBS strip, Ag plated. ②
Contact: PBS strip, Ag plated. ③
Cover: PBS strip, Ag plated. ④

STORAGE METHOD

After opening the bag of the phone jack, please include a desiccant into the bag, then seal it to avoid product oxidation.
打開包裝袋後，請在袋中加入乾燥劑並「密封」，避免產品氧化。

V2.1	無	改 版	2018.06.15
V2.0	無	新繪製	2008.12.12
版本 VER.	符號 SYMBOL	修 改 內 容 ALTERATION	更新日期 DATE

產品 PRODUCT	Phone Jack		型號 MODEL NO.	ST-005-G
製圖 DRAWN BY	核圖 CHECKED BY	主管 APPROVED BY	單位 UNIT	mm
Delon Lin	Chuck Young	Margaret Lee	比例 SCALE	4 : 1
			公差 TOLERANCE	.X=±0.3mm, .XX=±0.2mm

SWITRONIC
INDUSTRIAL CORP.
Switches



一綺電子企業股份有限公司

總公司：110 台北市信義路四段415號13樓之3
13F-3, NO.415, SEC.4, HSIN YI ROAD, TAIPEI, TAIWAN
TEL : 886-2-27290229(Rep.) FAX : 886-2-27582086
URL : www.switronic.com E-MAIL : switches@ms36.hinet.net