

In this week's assignment you should first define the composite wall


question by finding the heat transfer rate, and then solve the same question

while the thickness of the brick is increased to 32 cm and comment on the

results

- You should solve again the simplified wall calculation procedure replacing the glass fiber one with urethane rigid foam and while replacing the fiberboard with plywood and find the two  $R_{unit}$  values

- A 3 m high and 5 m wide wall consists of long 16 cm 22 cm cross section horizontal bricks ( $k = 0.72 \text{ W/m} \cdot ^\circ\text{C}$ ) separated by 3 cm thick plaster layers ( $k = 0.22 \text{ W/m} \cdot ^\circ\text{C}$ ).
- There are also 2 cm thick plaster layers on each side of the brick and a 3-cm-thick rigid foam ( $k = 0.026 \text{ W/m} \cdot ^\circ\text{C}$ ) on the inner side of the wall
- The indoor and the outdoor temperatures are  $20^\circ\text{C}$  and  $10^\circ\text{C}$ , and the convection heat transfer coefficients on the inner and the outer sides are  $h_1 = 10 \text{ W/m}^2 \cdot ^\circ\text{C}$  and  $h_2 = 25 \text{ W/m}^2 \cdot ^\circ\text{C}$ , respectively. Assuming one-dimensional heat transfer and disregarding radiation, determine the rate of heat transfer through the wall.

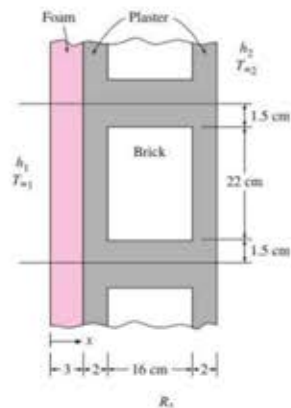

1. brick thickness=32cm 16cm→32cm

$$A = 0.015 + 0.22 + 0.015 = 0.25 \text{ m}^2$$

$$R_{indoor} = \frac{1}{h_1 A} = \frac{1}{10 \times 0.25} = 0.4^\circ\text{C}/\text{W}$$

$$R_{foam} = \frac{L_{foam}}{K_{foam} A} = \frac{0.03}{0.026 \times 0.25} = 4.615^\circ\text{C}/\text{W}$$

$$R_{plastic1} = \frac{L_{plastic1}}{K_{plastic} A} = \frac{0.02}{0.22 \times 0.25} = 0.3636^\circ\text{C}/\text{W}$$

$$R_{plastic2} = \frac{L_{plastic2}}{K_{plastic} A_{plastic2}} = \frac{0.16}{0.22 \times 0.015} = 48.48^\circ\text{C}/\text{W}$$

$$R_{brick} = \frac{L_{brick}}{K_{brick} A_{brick}} = \frac{0.16}{0.72 \times 0.22} = 1.01^\circ\text{C}/\text{W}$$

$$\frac{1}{R_{para}} = \frac{1}{R_{plastic2}} \times 2 + \frac{1}{R_{brick}} = \frac{1}{48.48} \times 2 + \frac{1}{1.01} = 1.03 \rightarrow R_{para} = \frac{1}{1.03} = 0.97^\circ\text{C}/\text{W}$$

$$R_{outdoor} = \frac{1}{h_2 A} = \frac{1}{40 \times 0.25} = 0.1^\circ\text{C}/\text{W}$$

$$R_{total} = R_{indoor} + R_{foam} + 2R_{plastic1} + R_{para} + R_{outdoor} = 0.4 + 4.615 + 0.3636 \times 2 + 1.01 + 0.97 + 0.1 = 6.81^\circ\text{C}/\text{W}$$

$$\dot{Q} = \frac{T_{indoor} - T_{outdoor}}{R_{total}} = \frac{20 - (-10)}{6.81} = 4.4 \text{ kW}$$

2) When the thickness of the brick is increased to 32 cm,

$$A = 0.015 + 0.22 + 0.015 = 0.25 \text{ m}^2$$

$$R_{indoor} = \frac{1}{h_1 A} = \frac{1}{10 \times 0.25} = 0.4^\circ\text{C}/\text{W}$$

$$R_{foam} = \frac{L_{foam}}{K_{foam} A} = \frac{0.03}{0.026 \times 0.25} = 4.615^\circ\text{C}/\text{W}$$

$$R_{plastic1} = \frac{L_{plastic1}}{K_{plastic} A} = \frac{0.02}{0.22 \times 0.25} = 0.3636^\circ\text{C}/\text{W}$$

$$R_{plastic2} = \frac{L_{plastic2}}{K_{plastic} A_{plastic2}} = \frac{0.32}{0.22 \times 0.015} = 96.97^\circ\text{C}/\text{W}$$

$$R_{brick} = \frac{L_{brick}}{K_{brick} A_{brick}} = \frac{0.32}{0.72 \times 0.22} = 2.02^\circ\text{C}/\text{W}$$

$$\frac{1}{R_{para}} = \frac{1}{R_{plastic2}} \times 2 + \frac{1}{R_{brick}} = \frac{1}{96.97} \times 2 + \frac{1}{2.02} = 0.52 \rightarrow R_{para} = \frac{1}{0.52} = 1.92^\circ\text{C}/\text{W}$$

$$R_{outdoor} = \frac{1}{h_2 A} = \frac{1}{40 \times 0.25} = 0.1^\circ\text{C}/\text{W}$$

$$R_{total} = R_{indoor} + R_{foam} + 2R_{plastic1} + R_{para} + R_{outdoor} = 0.4 + 4.615 + 0.3636 \times 2 + 2.02 + 1.92 + 0.1 = 9.78^\circ\text{C}/\text{W}$$

$$\dot{Q} = \frac{T_{indoor} - T_{outdoor}}{R_{total}} = \frac{20 - (-10)}{9.78} = 3.07 \text{ kW}$$

Conclusion:

When the length of the parallel plate is doubled, the total thermal resistance of the parallel plate is also doubled, but the influence on the total thermal resistance of the composite plate is not significant, so the influence on heat transfer is not significant.

#### Q2: Heat transfer through the simplified wall

Determine the overall unit thermal resistance (the R-value) and the overall heat transfer coefficient (the U-factor) of a wood frame wall that is built around 38-mm 90-mm wood studs with a center-to-center distance of 400 mm. The 90-mm-wide cavity between the studs is filled with urethane rigid foam insulation. The inside is finished with 13-mm gypsum wallboard and the outside with 13-mm wood plywood and 13-mm 200-mm wood bevel lapped siding. The insulated cavity constitutes 75 percent of the heat transmission area while the studs, plates, and sills constitute 21 percent. The headers constitute 4 percent of the area, and they can be treated as studs. Also, determine the rate of heat loss through the walls of a house whose perimeter is 50 m and wall height is 2.5 m in Las Vegas, Nevada, whose winter design temperature is  $-2^\circ\text{C}$ .

$R_{unit} (\text{m}^2 \cdot ^\circ\text{C}/\text{W})$	wood	Insulation
---	------	------------



Pedram Nafisi Poor  
Week 3

<i>Outside air</i>	<i>0.03</i>	<i>0.03</i>
<i>Wood bevel</i>	<i>0.14</i>	<i>0.14</i>
<i>urethane rigid foam insulation</i>	<i>NO</i>	<i>0.98*90/25=3.528</i>
<i>Wood studs(90mm)</i>	<i>0.63</i>	<i>NO</i>
<i>gypsum wallboard</i>	<i>0.079</i>	<i>0.079</i>
<i>wood plywood</i>	<i>0.11</i>	<i>0.11</i>
<i>Inside air</i>	<i>0.12</i>	<i>0.12</i>

$$R'_{\text{withWOOD}} = 0.03 + 0.14 + 0.63 + 0.079 + 0.11 + 0.12 = 1.109 \text{m}^2 \cdot \text{C}/\text{w}$$

$$R'_{\text{withINS}} = 0.03 + 0.14 + 3.528 + 0.079 + 0.11 + 0.12 = 4.007 \text{m}^2 \cdot \text{C}/\text{w}$$



Pedram Nafisi Poor  
Week 3