




Device give LocoNet command OPC_SW_REQ and two consecutive inputs with the same selected address. First input gives DIR='1' when switch closed. Second input gives DIR='0' when switch closed.

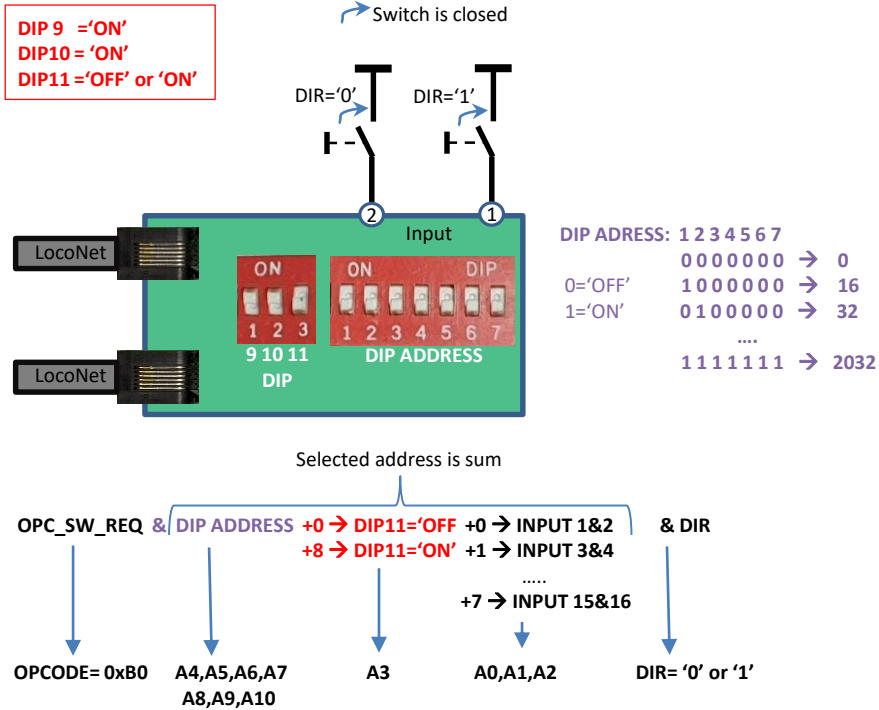

Device give LocoNet command OPC_SW_REQ with selected address, and DIR = '1' as switch is closed, and DIR = '0' where switch is opened.

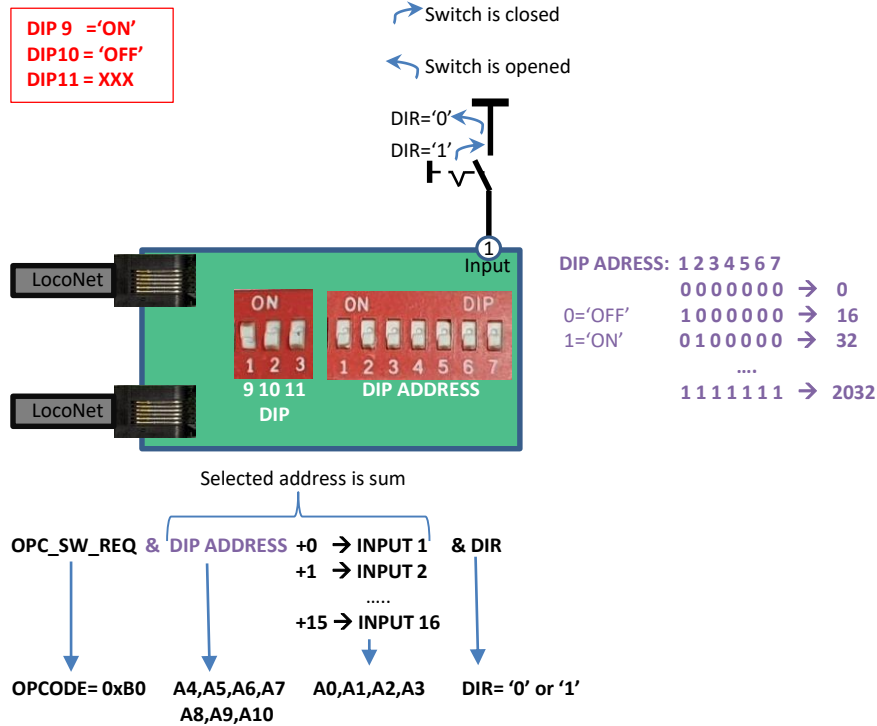

Device give LocoNet command OPC_SW_REQ with selected address, and DIR is alternating between '0' and '1' each time the switch is closed

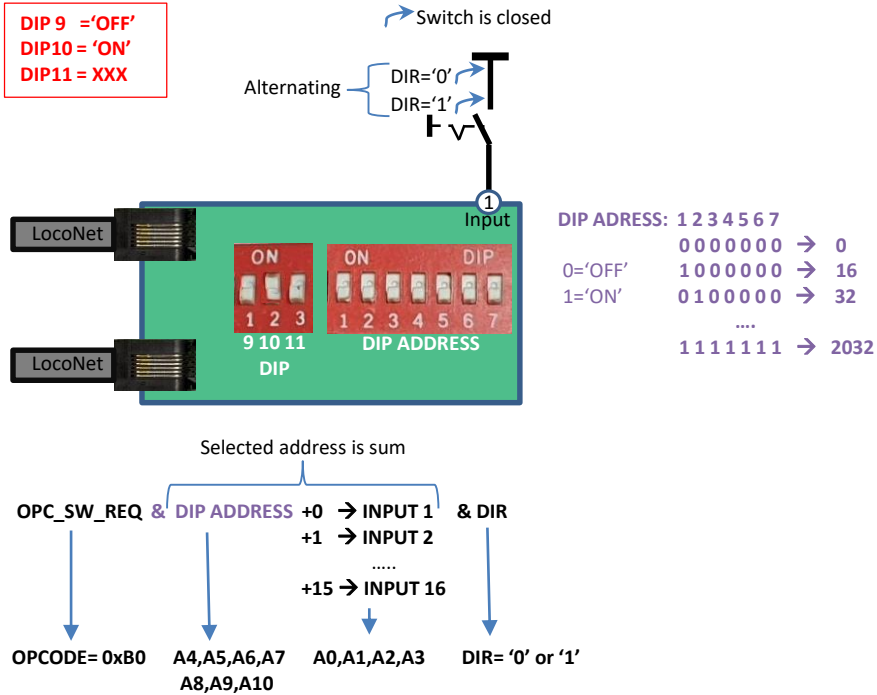

Device give LocoNet command OPC_INPUT_REP with selected address.
Sensor is high 'L=1' as switch is closed, and sensor is low 'L=0' where switch is opened.

