



T-SCMA Multiplexing Pattern

$K = 6$ codebooks over $N = 4$ subframes on a single 15 kHz subcarrier (overloading $K/N = 150\%$)

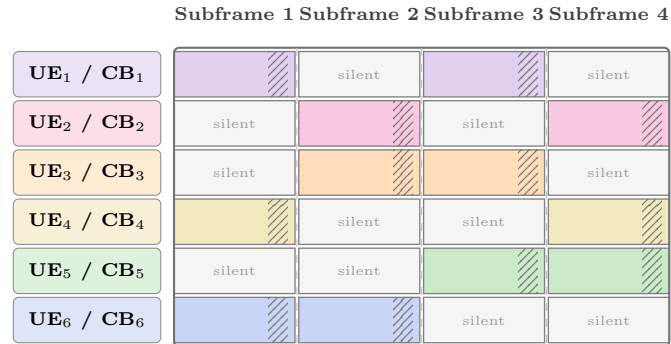

Each subframe accumulates $d_f = 3$ active codebooks

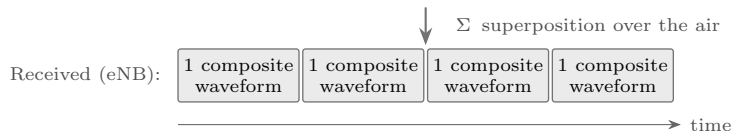

Design parameters

$N = 4$ subframes

$K = 6$ codebooks

$d_f = 3$ CBs per subframe

$d_v = 2$ subframes per CB

$K/N = 150\%$ overloading

$K = \binom{N}{d_v} = \binom{4}{2} = 6$

Legend

Active cell (data + DMRS pilot stripe)

Silent (UE not transmitting in this subframe)