Battery Life

The GLM Procedure

Class Level Information		
Class	**Levels**	**Values**
BRAND	2	1 2
DEVICE	3	1 2 3
DAY	2	1 2

Number of Observations Read	12
Number of Observations Used	12

Battery Life

The GLM Procedure

Dependent Variable: TRTIME

Source	DF	Sum of Squares	Mean Square	F Value	Pr > F
Model	6	0.00953260	0.00158877	64.39	0.0001
Error	5	0.00012337	0.00002467		
Corrected Total	11	0.00965597			

R-Square	Coeff Var	Root MSE	TRTIME Mean
0.987224	3.642523	0.004967	0.136368

Source	DF	Type I SS	Mean Square	F Value	Pr > F
BRAND	1	0.00023015	0.00023015	9.33	0.0283
DEVICE	2	0.00928792	0.00464396	188.22	<.0001
BRAND*DEVICE	2	0.00000138	0.00000069	0.03	0.9726
DAY	1	0.00001316	0.00001316	0.53	0.4980

Source	DF	Type III SS	Mean Square	F Value	Pr > F
BRAND	1	0.00023015	0.00023015	9.33	0.0283
DEVICE	2	0.00928792	0.00464396	188.22	<.0001
BRAND*DEVICE	2	0.00000138	0.00000069	0.03	0.9726
DAY	1	0.00001316	0.00001316	0.53	0.4980

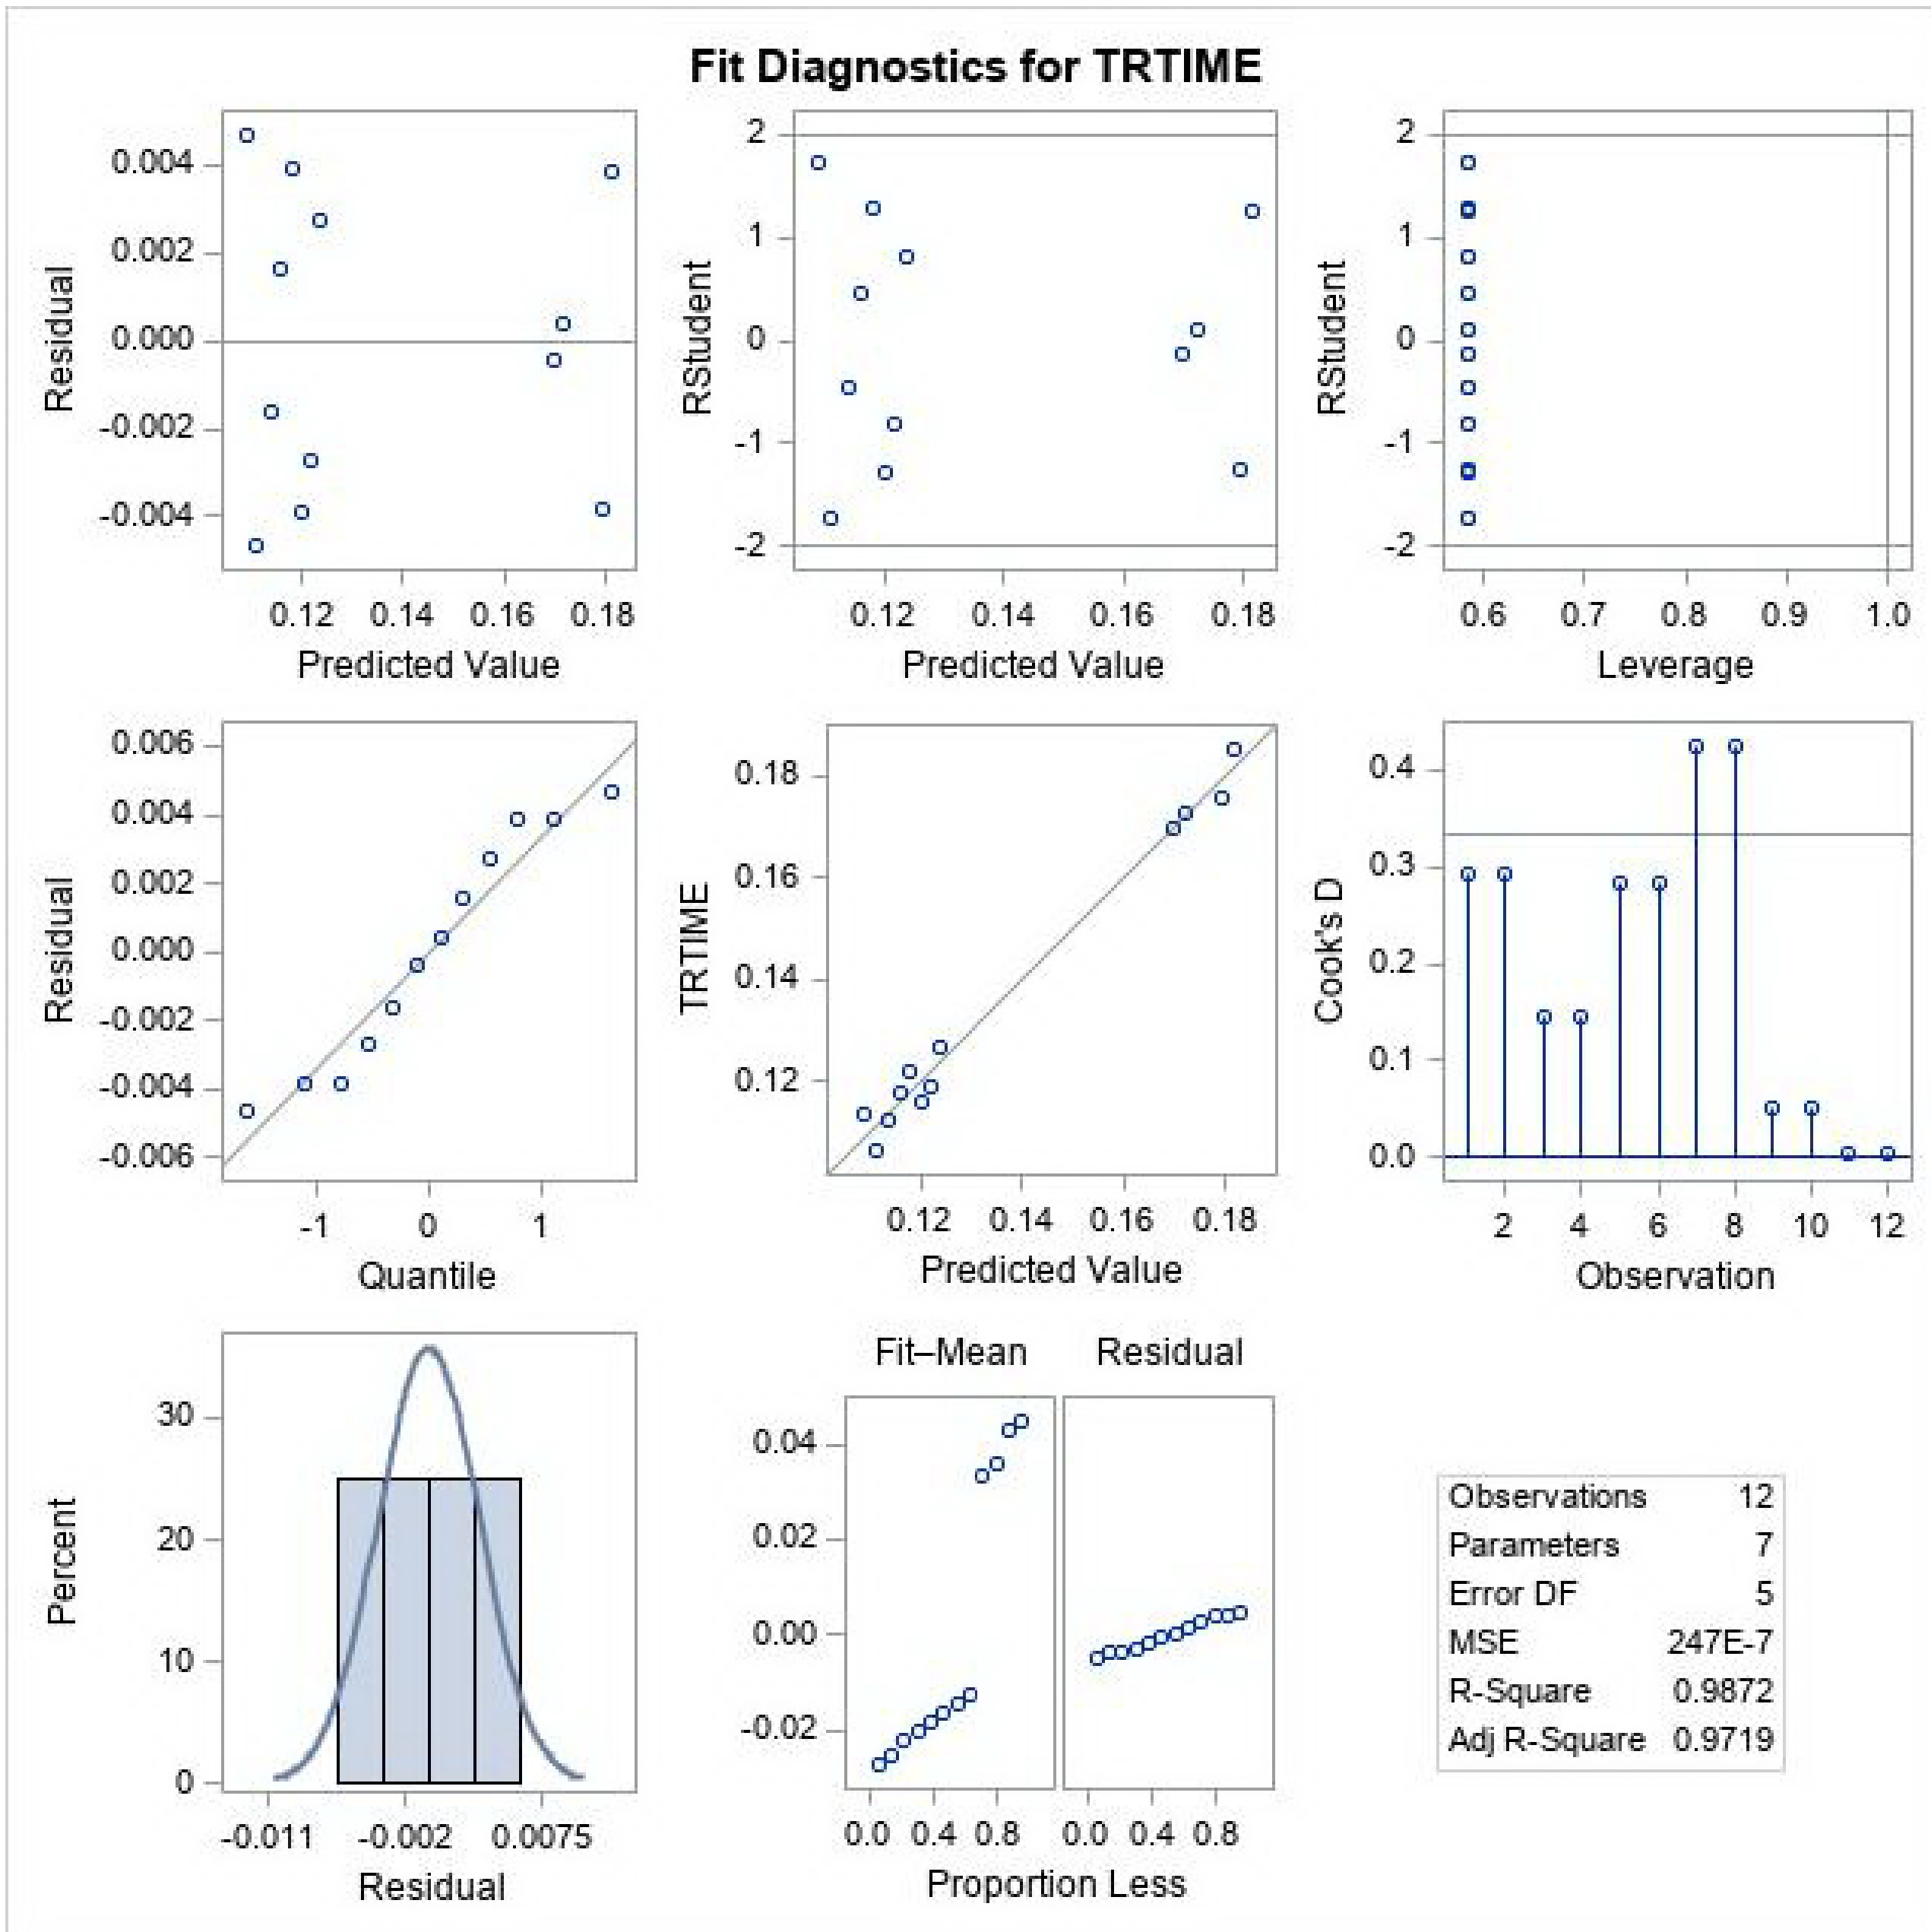
Fit Diagnostics for TRTIME
Residual
Predicted Value
RStudent
Predicted Value
RStudent
Leverage
Residual
Quantile
TRTIME
Predicted Value
Cook's D
Observation
Percent
Residual
Fit–Mean
Residual
Proportion Less
Observations 12
Parameters 7
Error DF 5
MSE 247E-7
R-Square 0.9872
Adj R-Square 0.9719

Battery Life

The GLM Procedure

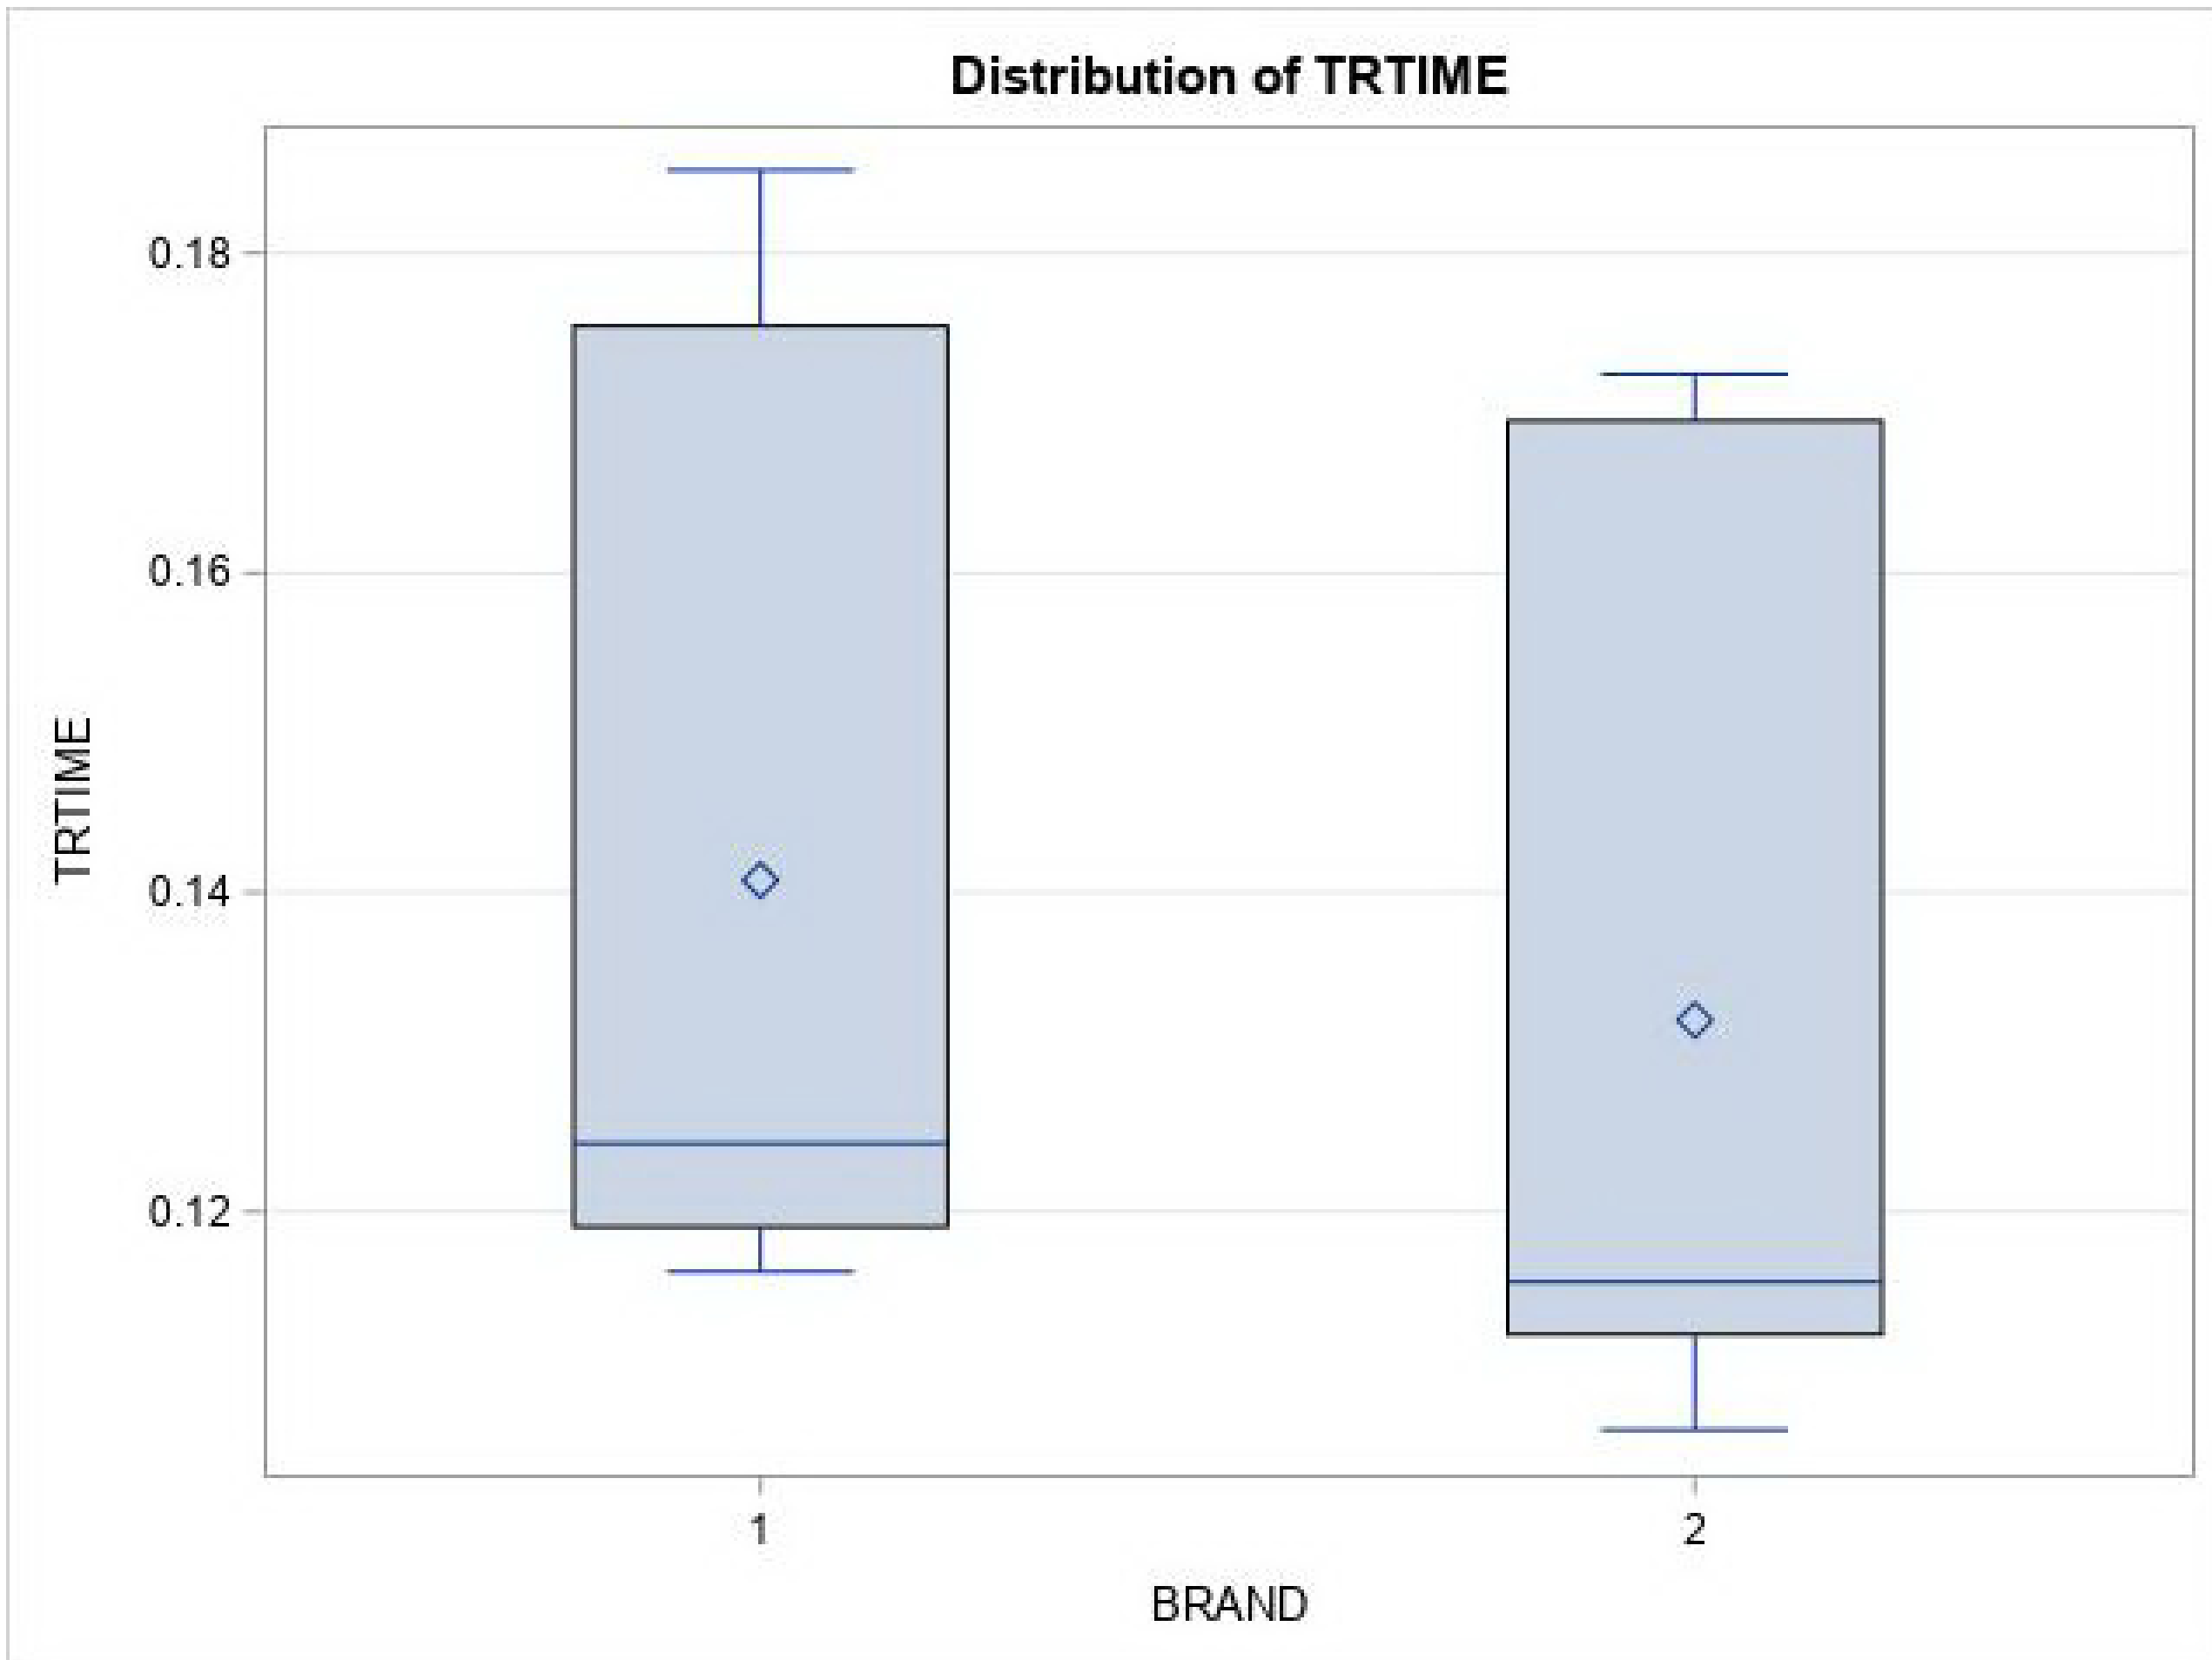

Battery Life

The GLM Procedure

Tukey's Studentized Range (HSD) Test for TRTIME

Note: This test controls the Type I experimentwise error rate, but it generally has a higher Type II error rate than REGWQ.

Alpha	0.05
Error Degrees of Freedom	5
Error Mean Square	0.000025
Critical Value of Studentized Range	3.63534
Minimum Significant Difference	0.0074

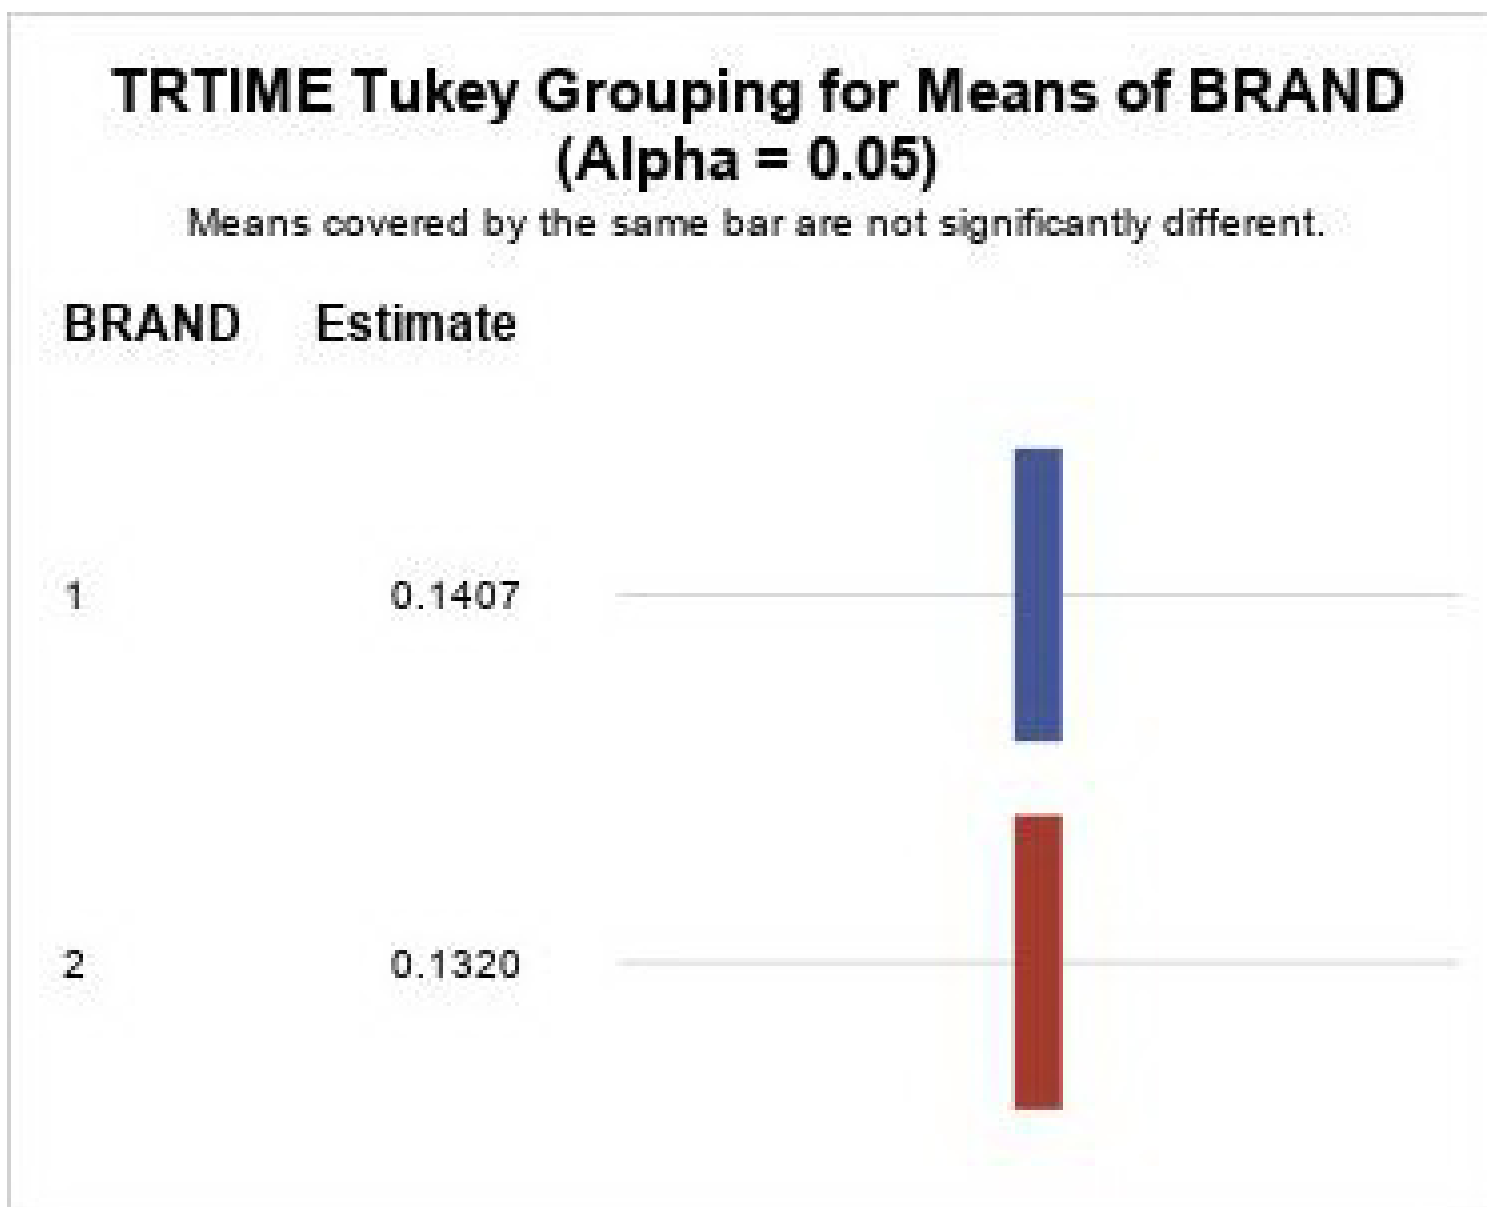

Battery Life

The GLM Procedure

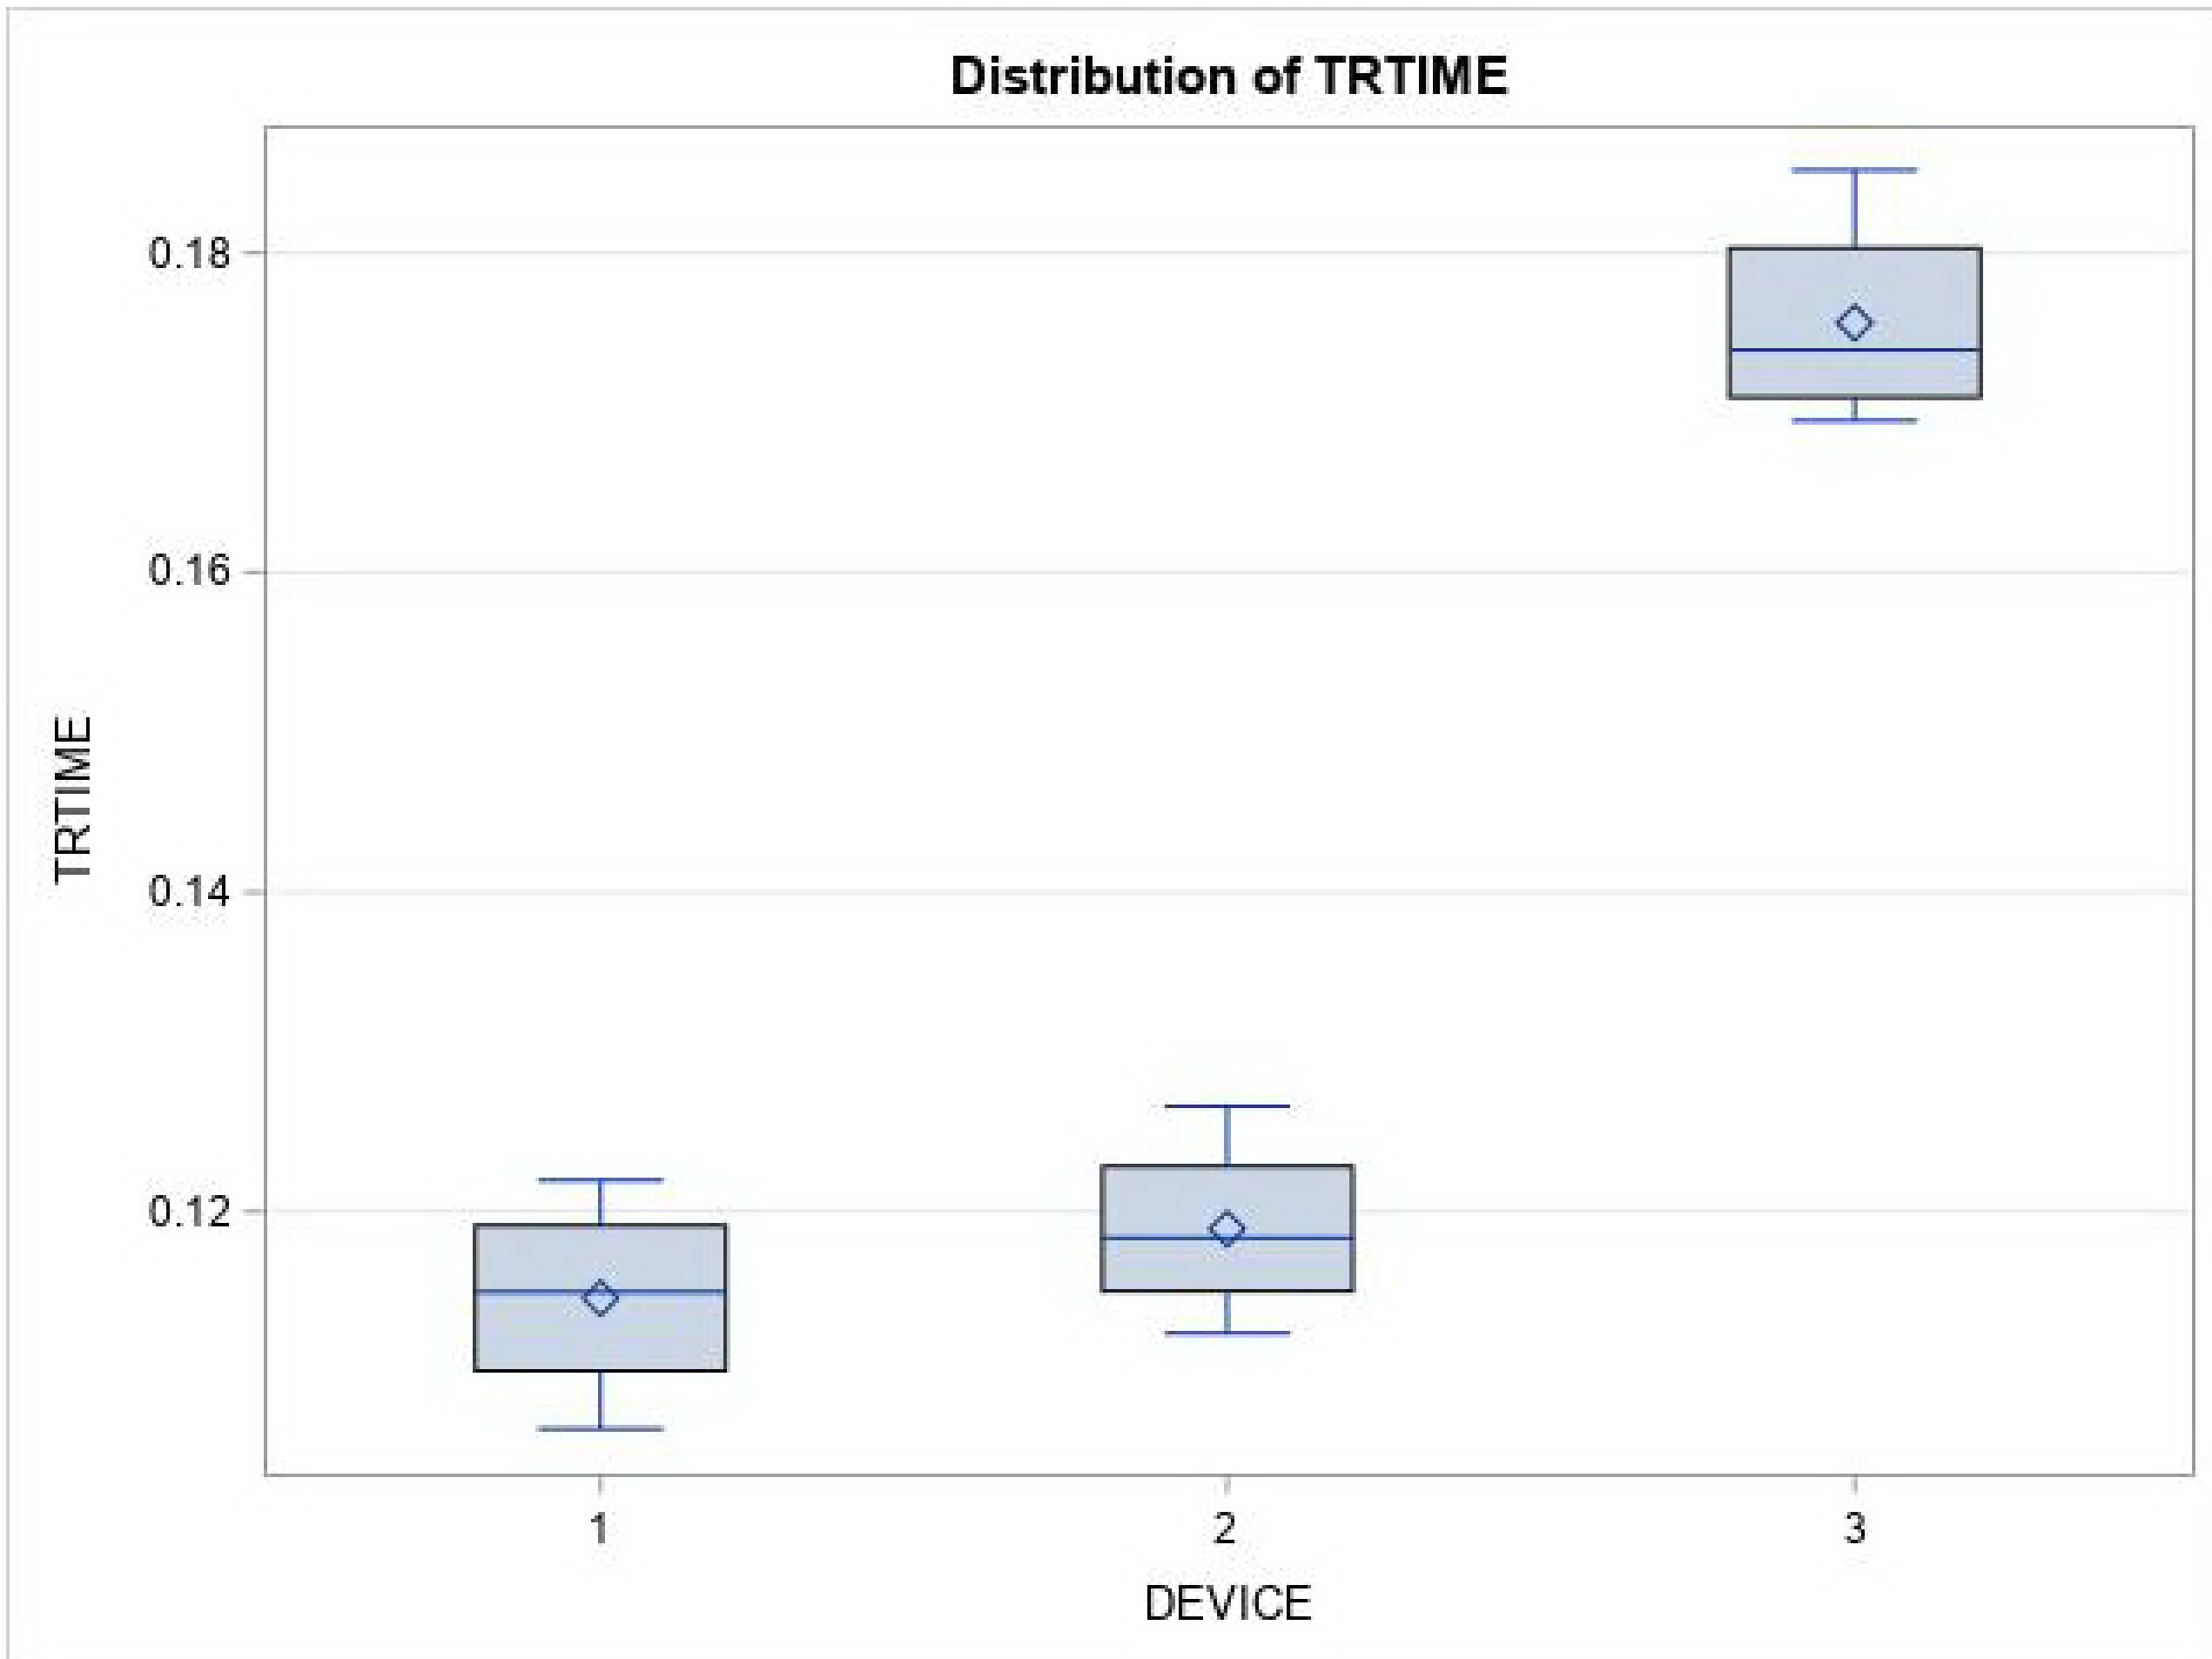

Battery Life

The GLM Procedure

Tukey's Studentized Range (HSD) Test for TRTIME

Note: This test controls the Type I experimentwise error rate, but it generally has a higher Type II error rate than REGWQ.

Alpha	0.05
Error Degrees of Freedom	5
Error Mean Square	0.000025
Critical Value of Studentized Range	4.60171
Minimum Significant Difference	0.0114

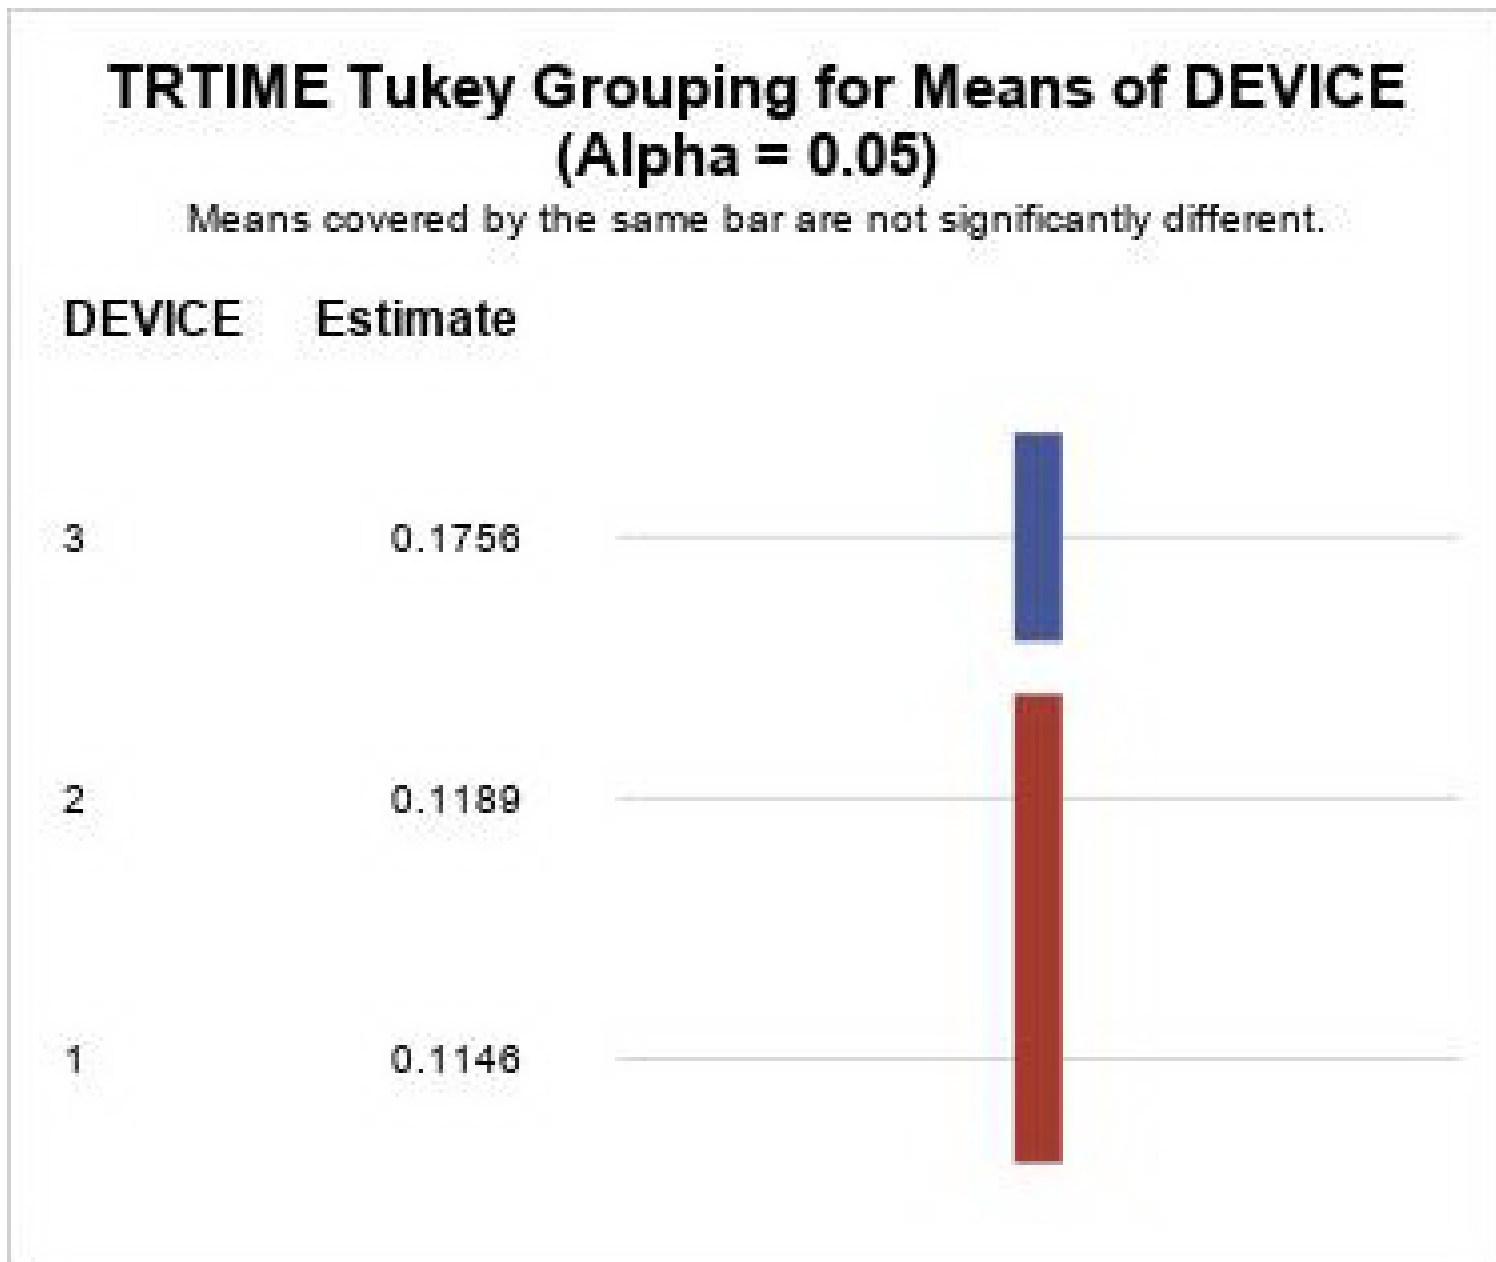

Battery Life

The GLM Procedure

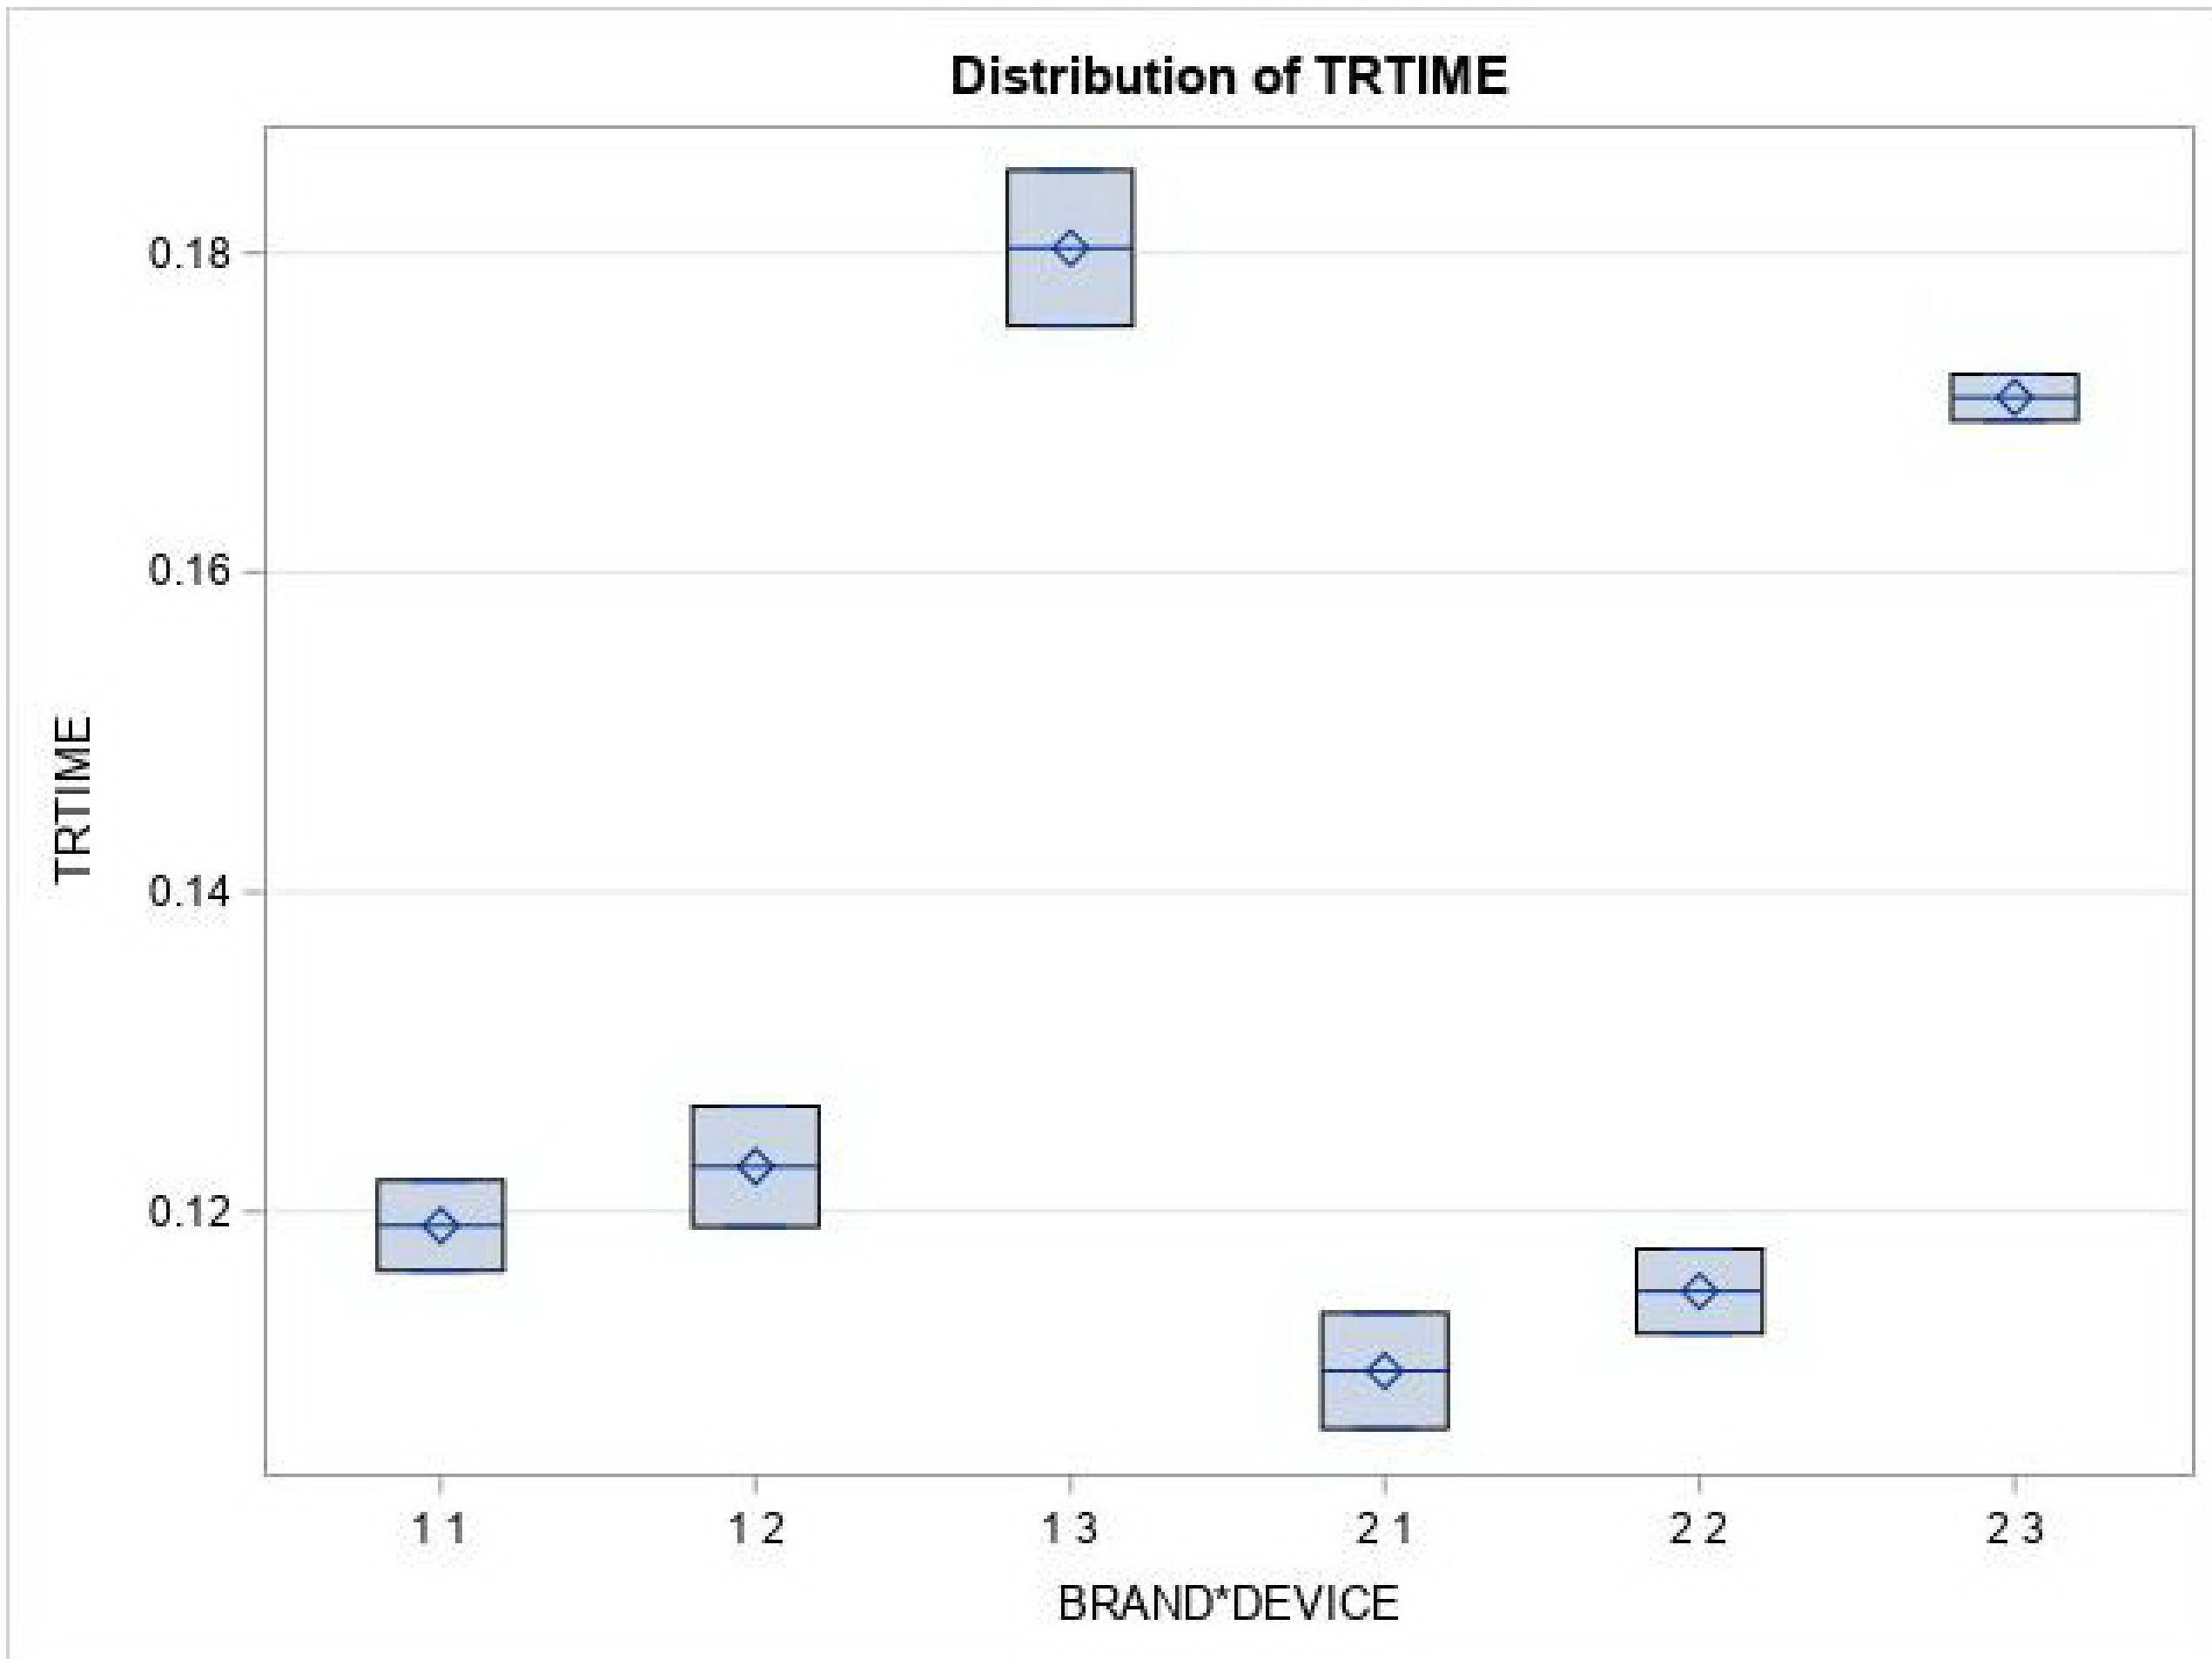

Level of BRAND	Level of DEVICE	N	TRTIME Mean	TRTIME Std Dev
1	1	2	0.11911514	0.00401082
1	2	2	0.12281495	0.00532781
1	3	2	0.18031189	0.00689188
2	1	2	0.11000967	0.00512892
2	2	2	0.11500330	0.00373883
2	3	2	0.17095266	0.00206636

Battery Life

The UNIVARIATE Procedure
Variable: RESID

Moments			
N	12	Sum Weights	12
Mean	0	Sum Observations	0
Std Deviation	0.00334891	Variance	0.00001122
Skewness	0	Kurtosis	-1.5774589
Uncorrected SS	0.00012337	Corrected SS	0.00012337
Coeff Variation	.	Std Error Mean	0.00096675

Basic Statistical Measures			
Location		Variability	
Mean	0	Std Deviation	0.00335
Median	-139E-19	Variance	0.0000112
Mode	.	Range	0.00935
		Interquartile Range	0.00655

Tests for Location: Mu0=0				
Test	Statistic		p Value	
Student's t	t	0	Pr > |t|	1.0000
Sign	M	0	Pr >= |M|	1.0000
Signed Rank	S	0	Pr >= |S|	1.0000

Tests for Normality				
Test	Statistic		p Value	
Shapiro-Wilk	W	0.92448	Pr < W	0.3252
Kolmogorov-Smirnov	D	0.125014	Pr > D	>0.1500
Cramer-von Mises	W-Sq	0.044254	Pr > W-Sq	>0.2500
Anderson-Darling	A-Sq	0.329372	Pr > A-Sq	>0.2500

Quantiles (Definition 5)	
Level	Quantile
100% Max	0.00467382
99%	0.00467382

95%	0.00467382
90%	0.00388320
75% Q3	0.00327319
50% Median	-0.00000000
25% Q1	-0.00327319
10%	-0.00388320
5%	-0.00467382
1%	-0.00467382
0% Min	-0.00467382

Extreme Observations			
Lowest		**Highest**	
Value	**Obs**	**Value**	**Obs**
-0.00467382	7	0.00159663	9
-0.00388320	1	0.00272021	3
-0.00382617	6	0.00382617	5
-0.00272021	4	0.00388320	2
-0.00159663	10	0.00467382	8