

Battery Life

The GLM Procedure

Class Level Information		
Class	Levels	Values
BRAND	2	1 2
DEVICE	3	1 2 3
DAY	2	1 2

Number of Observations Read	12
Number of Observations Used	12

Battery Life

The GLM Procedure


Dependent Variable: TIME

Source	DF	Sum of Squares	Mean Square	F Value	Pr > F
Model	6	23.33500000	3.88916667	38.32	0.0005
Error	5	0.50750000	0.10150000		
Corrected Total	11	23.84250000			

R-Square	Coeff Var	Root MSE	TIME Mean
0.978714	4.178238	0.318591	7.625000


Source	DF	Type I SS	Mean Square	F Value	Pr > F
BRAND	1	0.80083333	0.80083333	7.89	0.0376
DEVICE	2	22.44500000	11.22250000	110.57	<.0001
BRAND*DEVICE	2	0.08166667	0.04083333	0.40	0.6886
DAY	1	0.00750000	0.00750000	0.07	0.7966

Source	DF	Type III SS	Mean Square	F Value	Pr > F
BRAND	1	0.80083333	0.80083333	7.89	0.0376
DEVICE	2	22.44500000	11.22250000	110.57	<.0001
BRAND*DEVICE	2	0.08166667	0.04083333	0.40	0.6886
DAY	1	0.00750000	0.00750000	0.07	0.7966

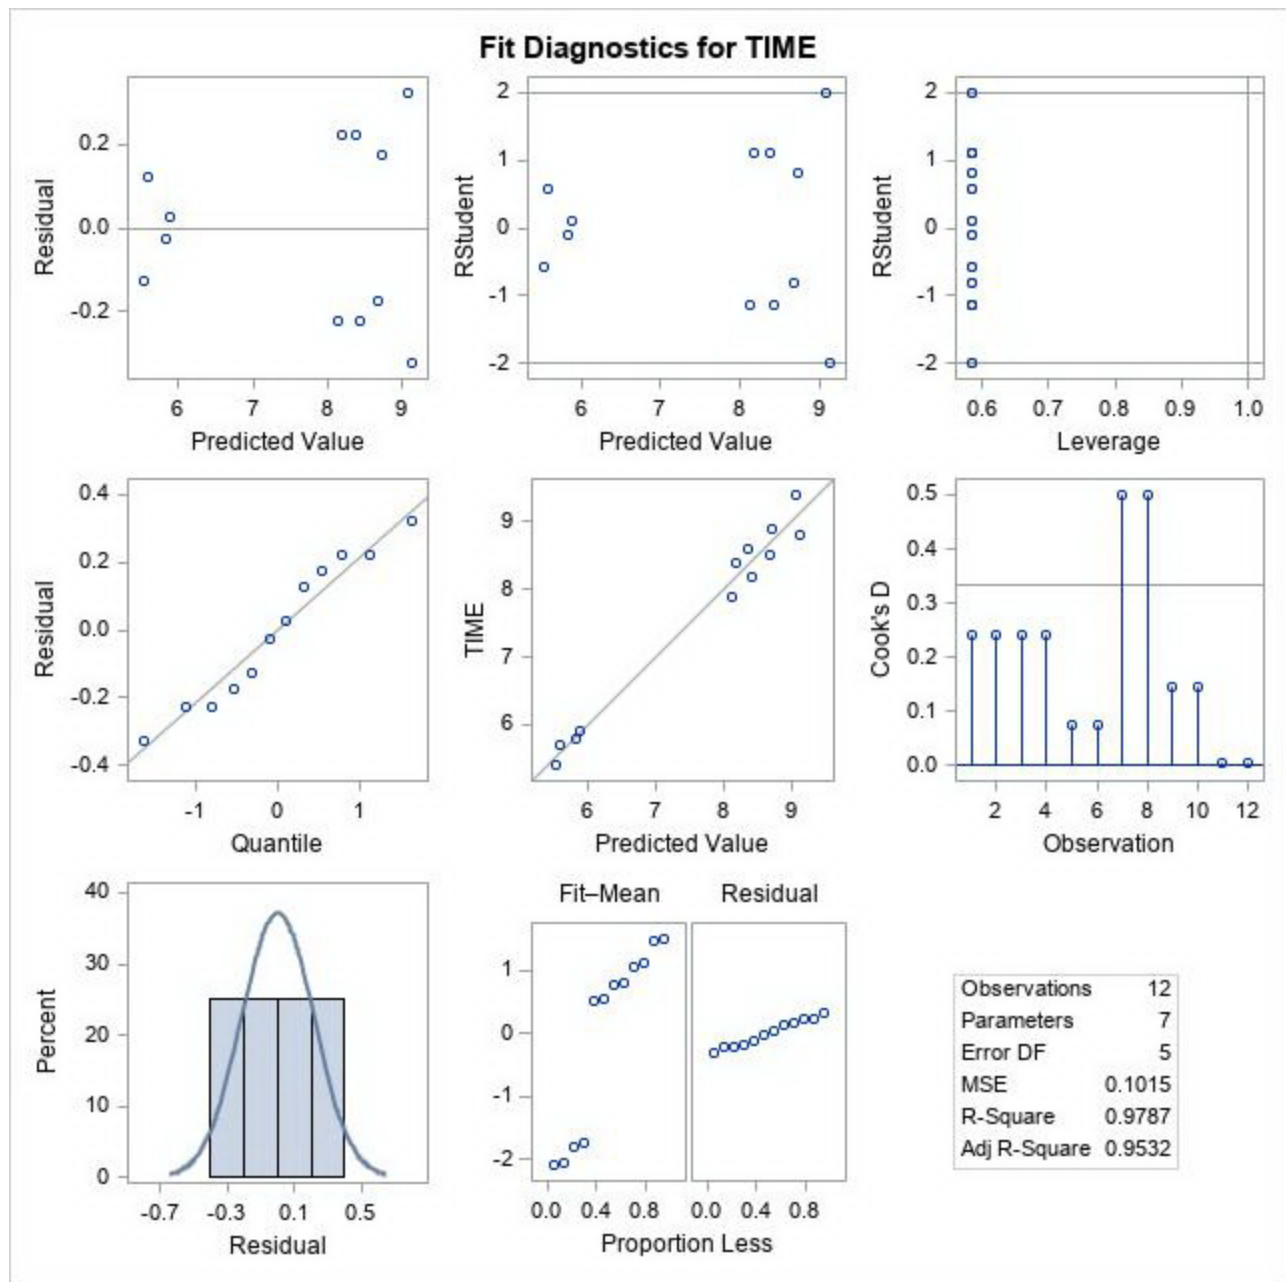

Battery Life

The GLM Procedure

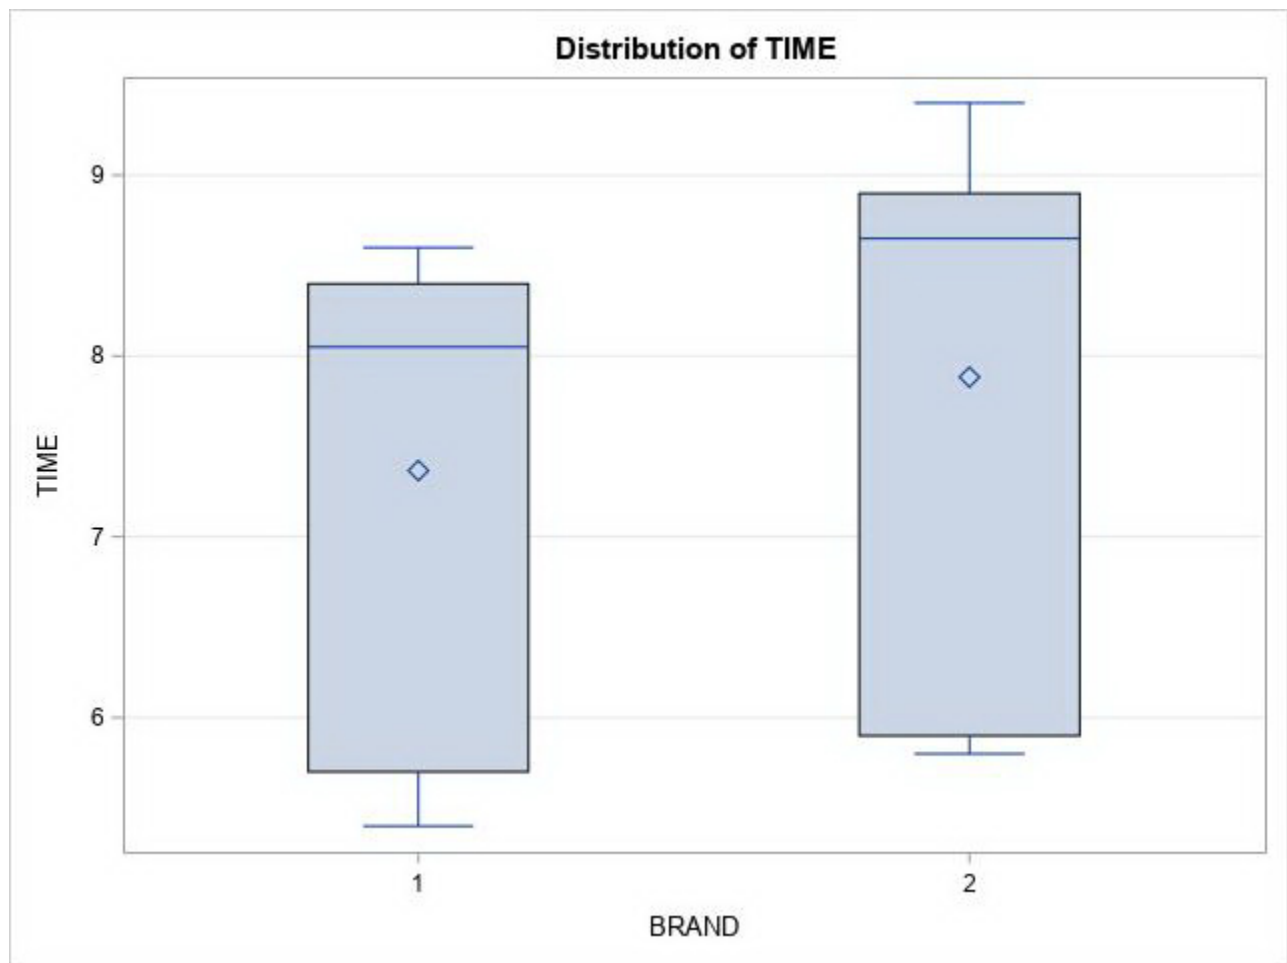


Battery Life

The GLM Procedure

Tukey's Studentized Range (HSD) Test for TIME


Note: This test controls the Type I experimentwise error rate, but it generally has a higher Type II error rate than REGWQ.

Alpha	0.05
Error Degrees of Freedom	5
Error Mean Square	0.1015
Critical Value of Studentized Range	3.63534
Minimum Significant Difference	0.4728

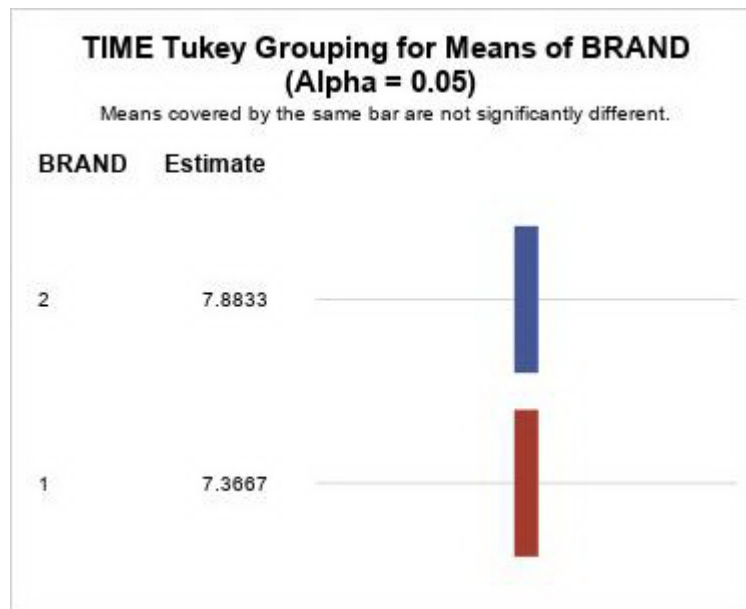

Battery Life

The GLM Procedure

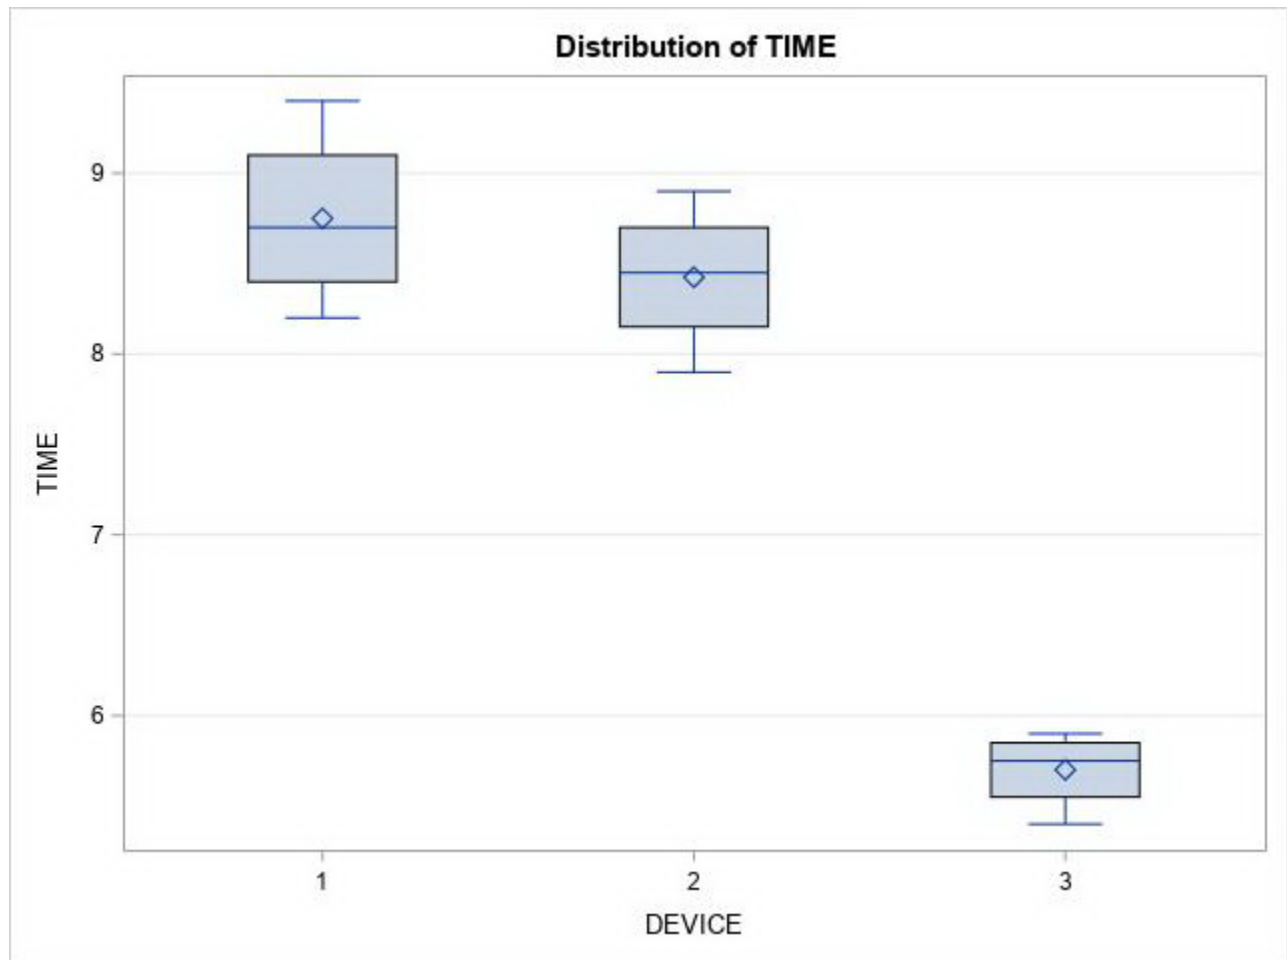


Battery Life

The GLM Procedure

Tukey's Studentized Range (HSD) Test for TIME


Note: This test controls the Type I experimentwise error rate, but it generally has a higher Type II error rate than REGWQ.

Alpha	0.05
Error Degrees of Freedom	5
Error Mean Square	0.1015
Critical Value of Studentized Range	4.60171
Minimum Significant Difference	0.733

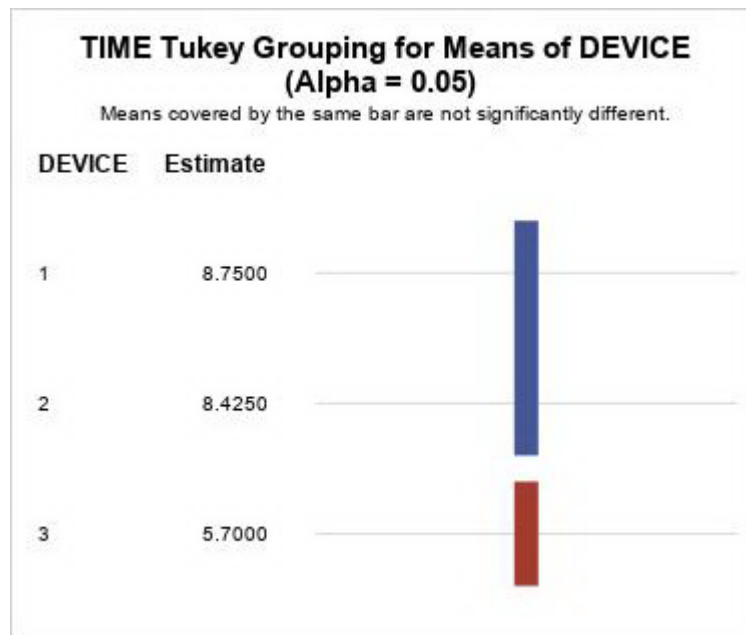

Battery Life

The GLM Procedure

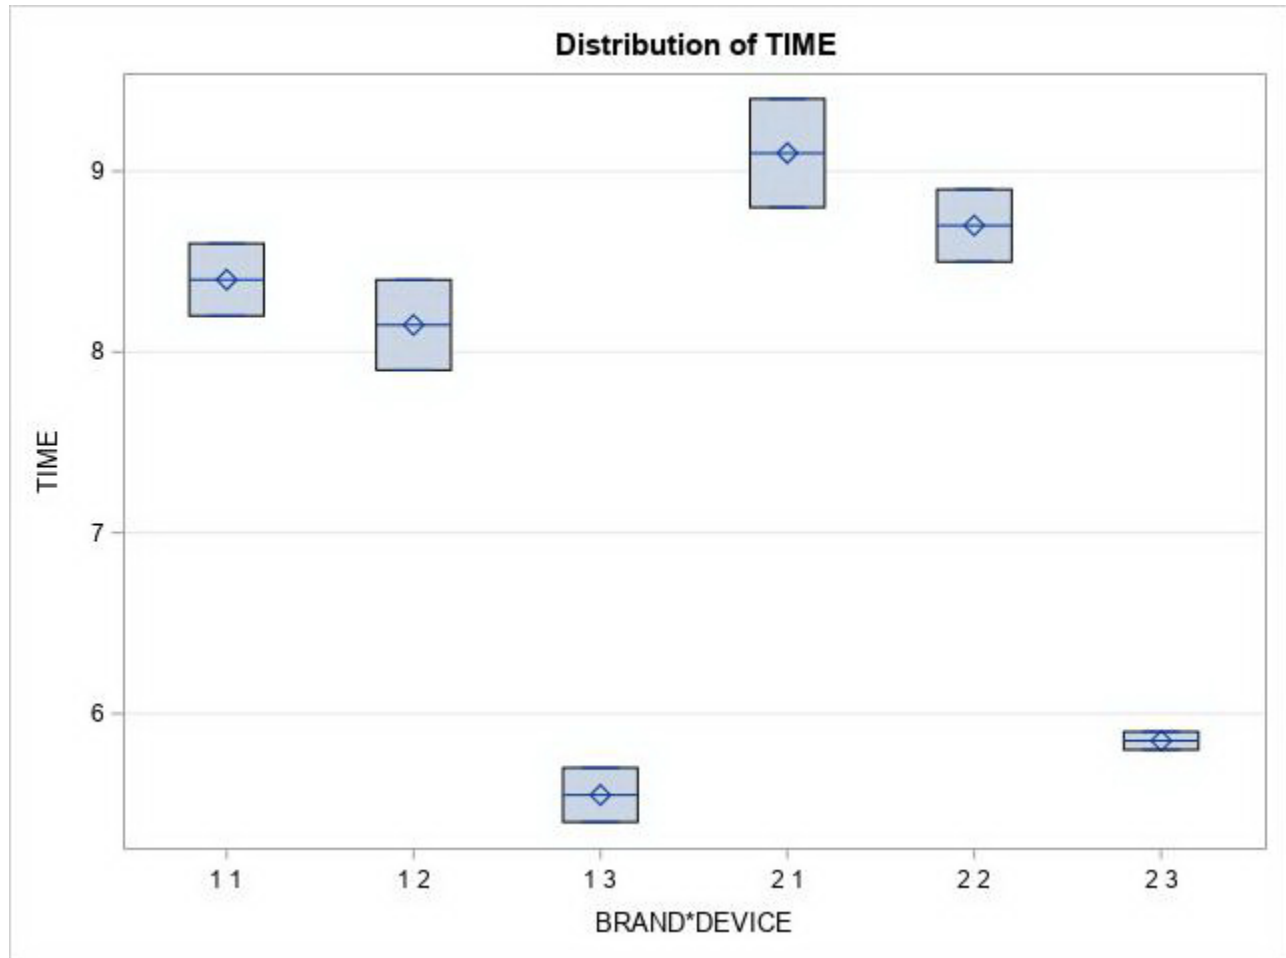

Level of BRAND	Level of DEVICE	N	TIME	
			Mean	Std Dev
1	1	2	8.4000000	0.28284271
1	2	2	8.1500000	0.35355339
1	3	2	5.5500000	0.21213203
2	1	2	9.1000000	0.42426407
2	2	2	8.7000000	0.28284271
2	3	2	5.8500000	0.07071068

Battery Life

The UNIVARIATE Procedure
Variable: RESID

Moments			
N	12	Sum Weights	12
Mean	0	Sum Observations	0
Std Deviation	0.21479377	Variance	0.04613636
Skewness	0	Kurtosis	-1.4475187
Uncorrected SS	0.5075	Corrected SS	0.5075
Coeff Variation	.	Std Error Mean	0.06200562

Basic Statistical Measures			
Location		Variability	
Mean	0.00000	Std Deviation	0.21479
Median	-0.00000	Variance	0.04614
Mode	-0.22500	Range	0.65000
		Interquartile Range	0.40000

Tests for Location: Mu0=0				
Test	Statistic		p Value	
Student's t	t	0	Pr > t 	1.0000
Sign	M	0	Pr >= M 	1.0000
Signed Rank	S	1	Pr >= S 	0.9644

Tests for Normality				
Test	Statistic		p Value	
Shapiro-Wilk	W	0.941552	Pr < W	0.5184
Kolmogorov-Smirnov	D	0.136368	Pr > D	>0.1500
Cramer-von Mises	W-Sq	0.04858	Pr > W-Sq	>0.2500
Anderson-Darling	A-Sq	0.311694	Pr > A-Sq	>0.2500

Quantiles (Definition 5)	
Level	Quantile
100% Max	0.325
99%	0.325

95%	0.325
90%	0.225
75% Q3	0.200
50% Median	-0.000
25% Q1	-0.200
10%	-0.225
5%	-0.325
1%	-0.325
0% Min	-0.325

Extreme Observations			
Lowest		Highest	
Value	Obs	Value	Obs
-0.325	8	0.125	6
-0.225	3	0.175	10
-0.225	2	0.225	4
-0.175	9	0.225	1
-0.125	5	0.325	7