
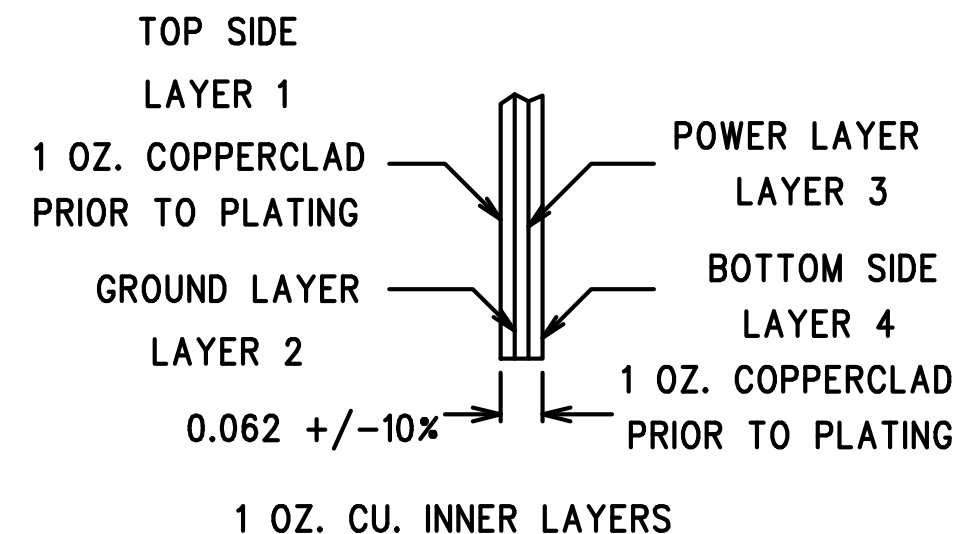



SILKSCREEN
31-0005 REV 1

GENTURI INC
ASSY: 30-0005 REV ____
PCB: 31-0005 REV 1

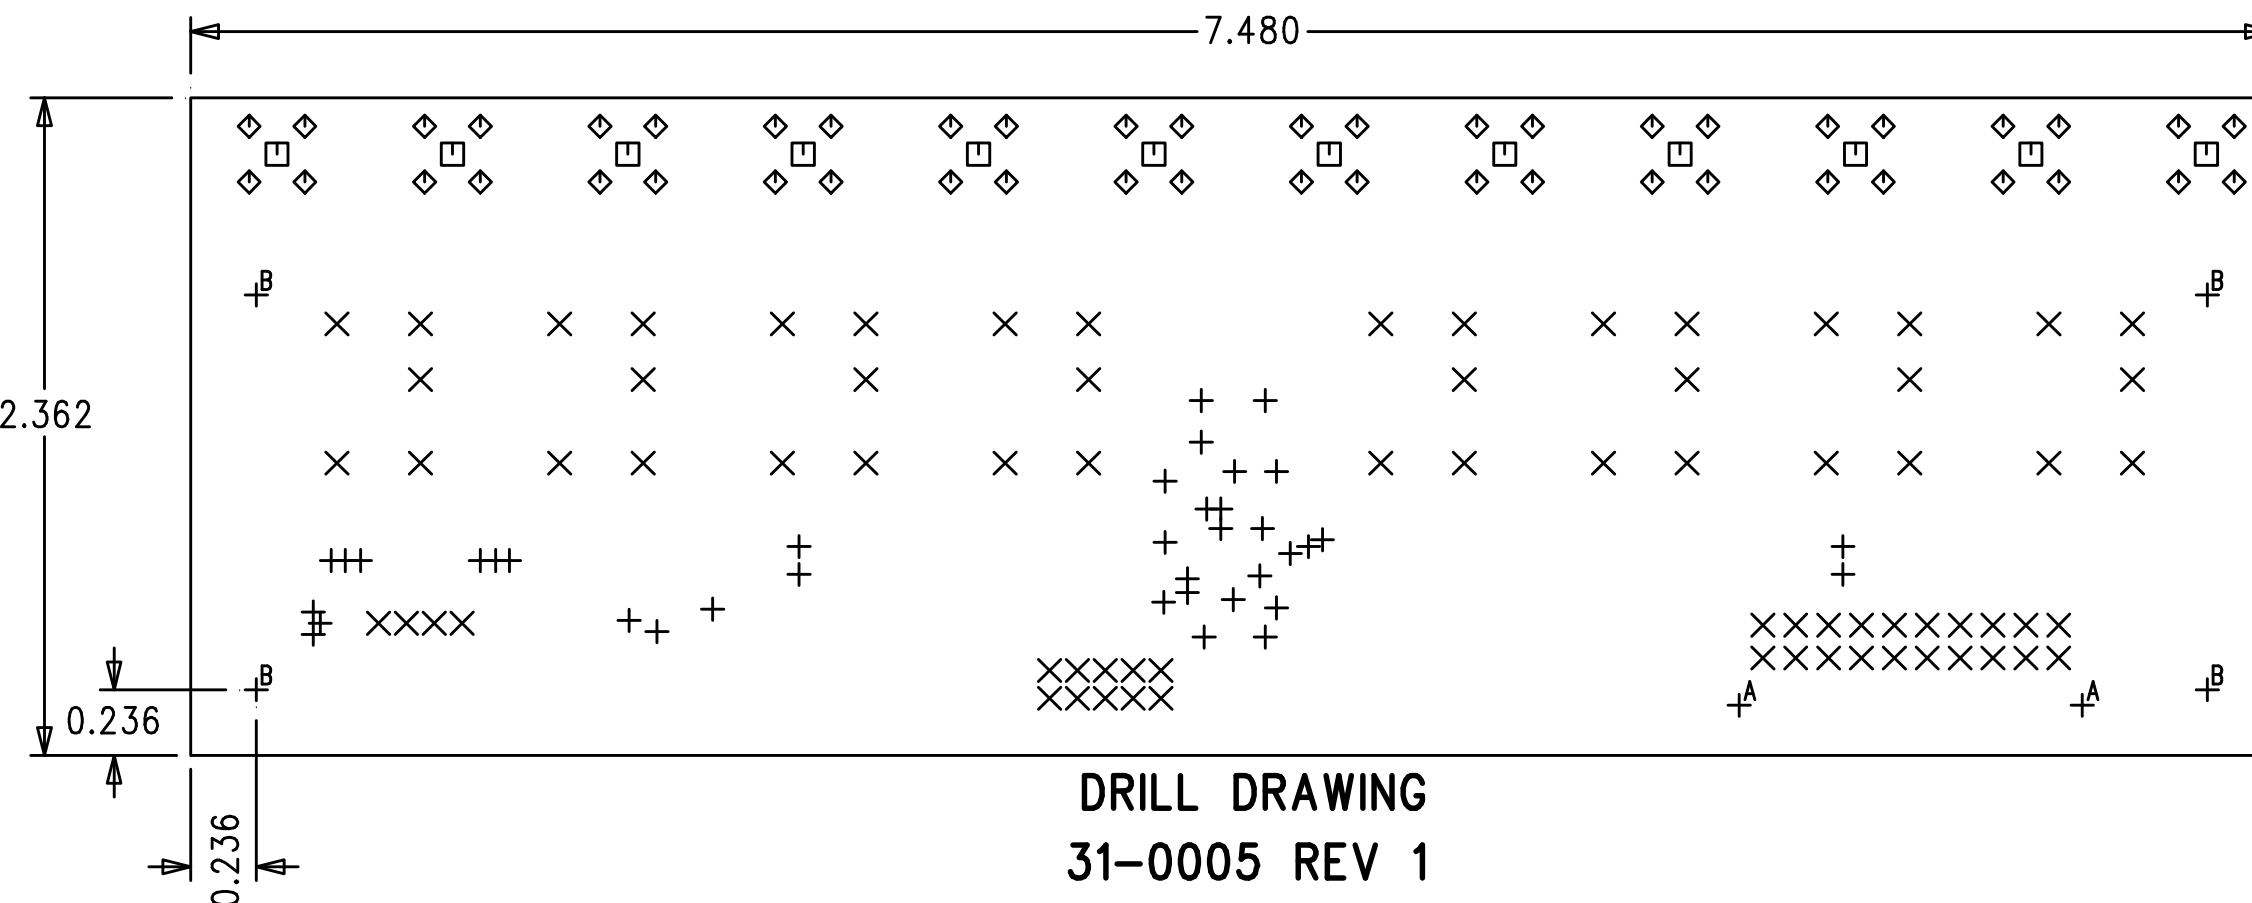


- NOTES:
1. MAT'L: 0.062 THK. FR4 COPPERCLAD LAMINATE.
 2. ALL HOLES TO BE PLATED THRU WITH A MINIMUM WALL THICKNESS OF 0.001.
 3. BOARDS TO BE LPIOBC ON BOTH SIDES – GREEN COLOR.
 4. BOARDS TO BE ENIG FINISH AFTER SOLDERMASK.
 5. BOARDS TO BE SILKSCREENED ON TOP SIDE WITH PERMANENT, WHITE EPOXY (CHEMICAL AND SCRATCH RESISTANT).
 6. BOARDS TO BE ELECTRICALLY TESTED FOR SHORTS AND OPENS.
 7. BOARDS SHALL BE MADE FROM UNDERWRITER LABORATORY RECOGNIZED MATERIAL AND THE FINISHED BOARD MUST CARRY THE VENDOR'S U.L. LOGO AND DATE CODE.
 8. ALL DRAWINGS AND FILMS VIEWED FROM TOP SIDE.


DRILL CHART			
SYMBOL	SIZE	QTY	PLATED TYPE
+	0.015 +0/-0.005	38	PLATED
×	0.043 +/-0.003	74	PLATED
□	0.059 +/-0.003	12	PLATED
◇	0.063 +/-0.003	48	PLATED
A	0.095 +/-0.003	2	PLATED
B	0.142 +/-0.003	4	PLATED

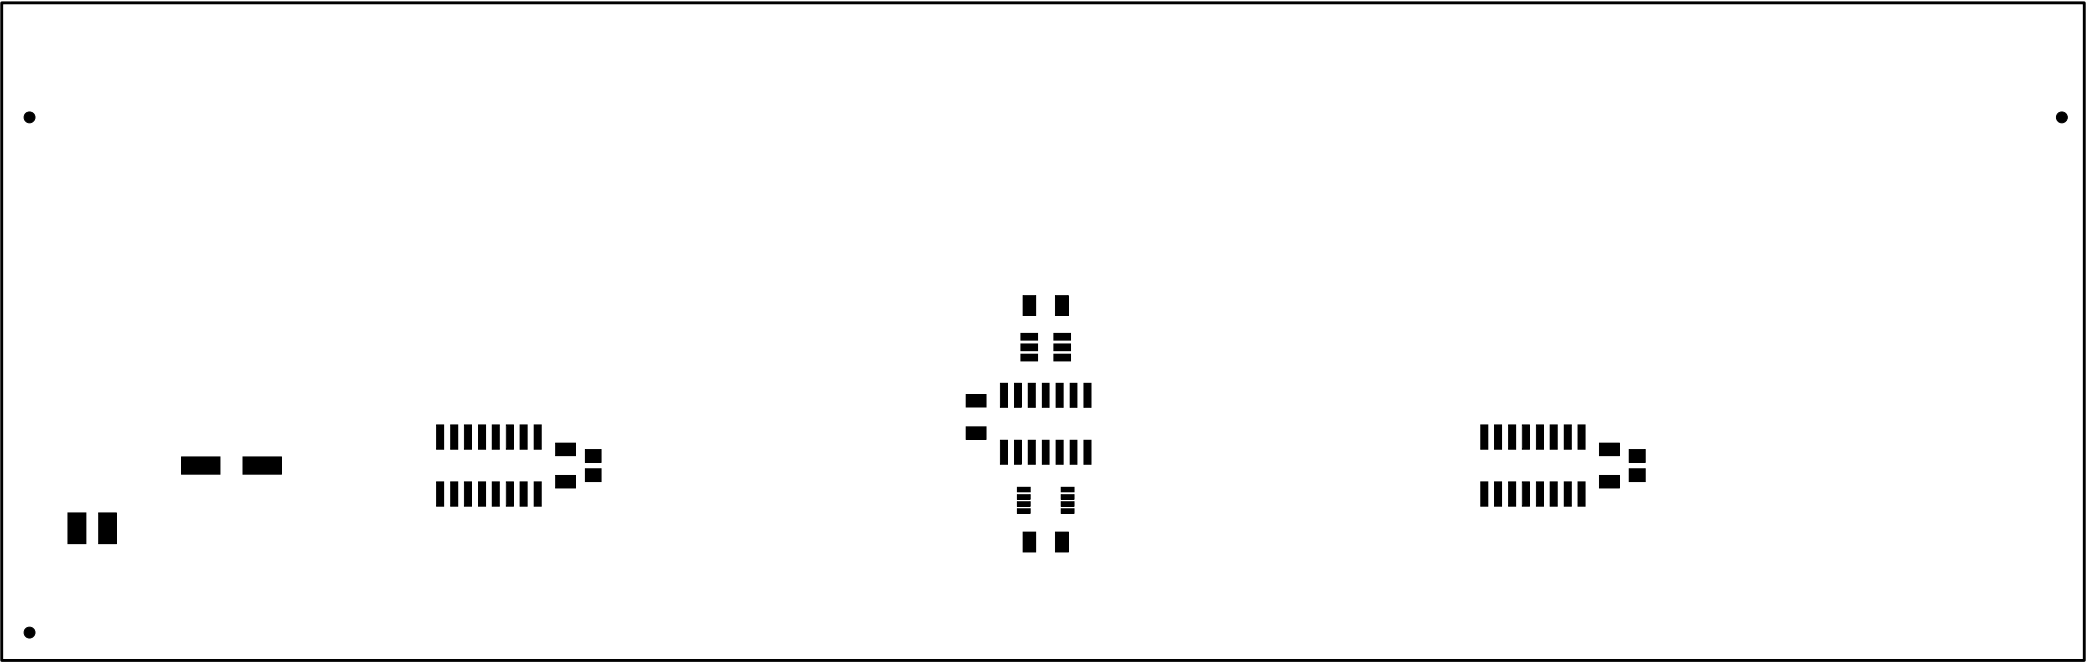


SOLDERPASTE
31-0005 REV 1

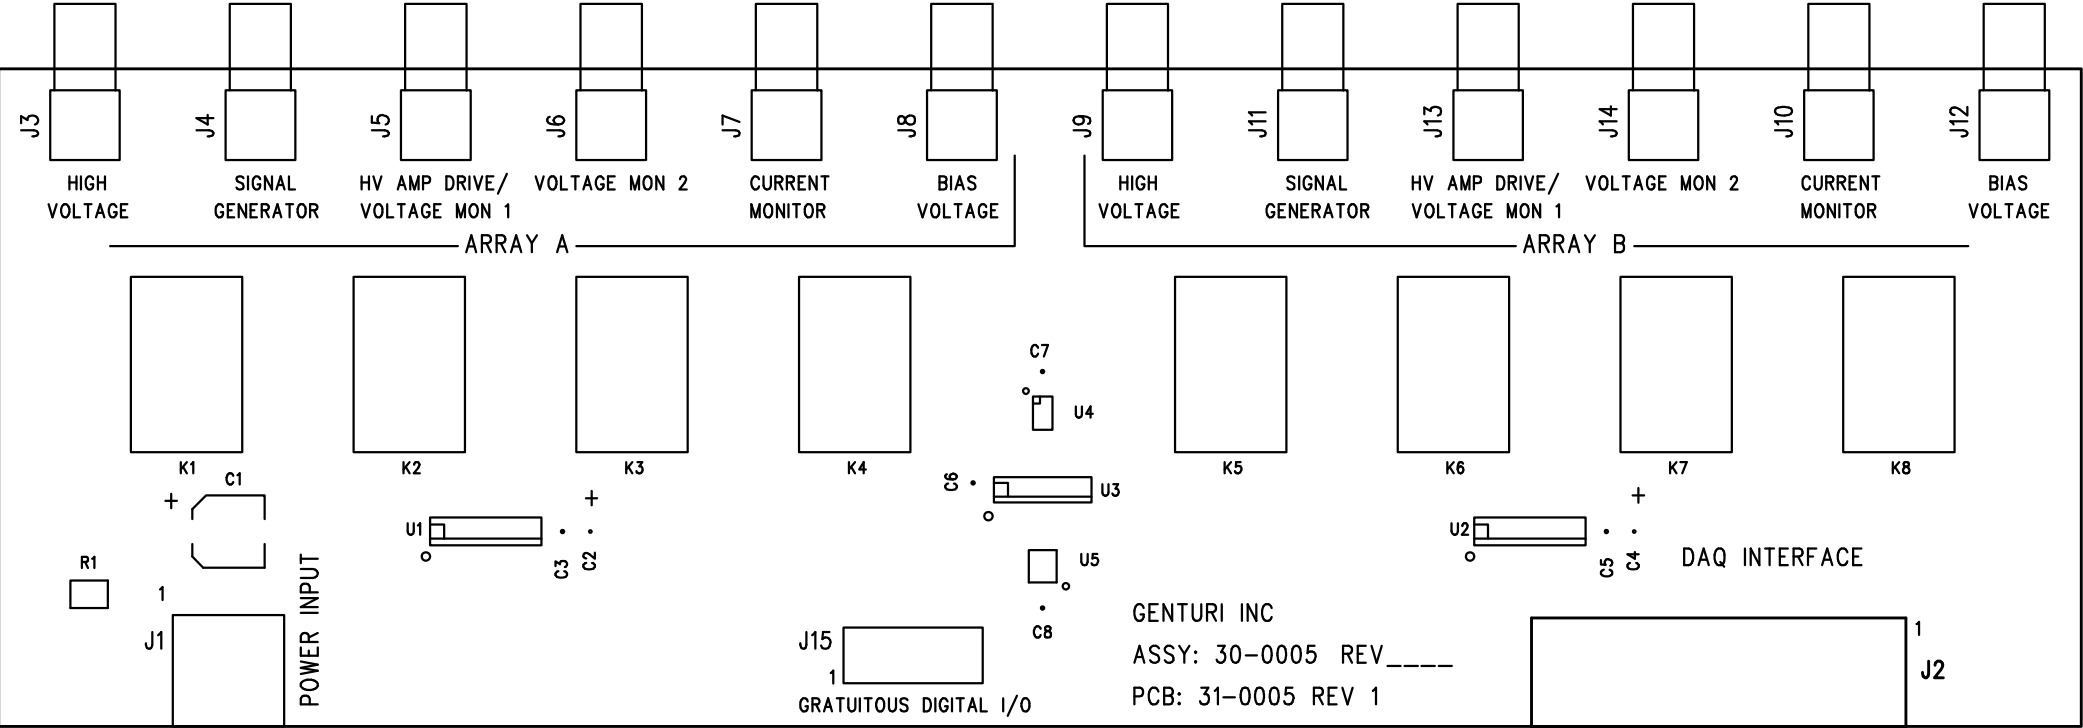


SILKSCREEN
31-0005 REV 1

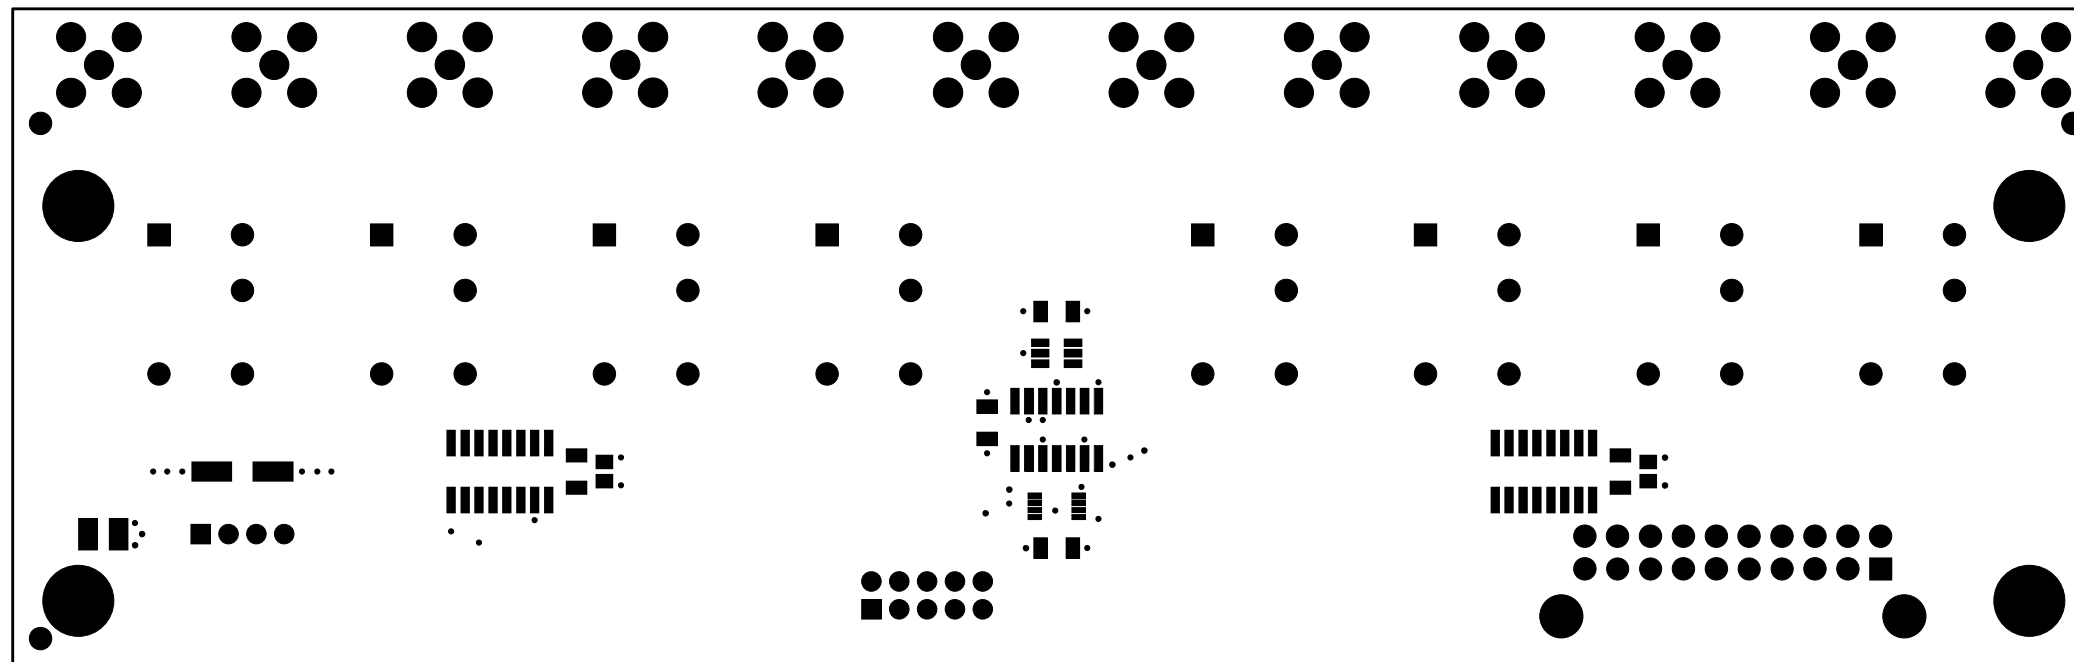


SOLDERMASK TOP SIDE
31-0005 REV 1

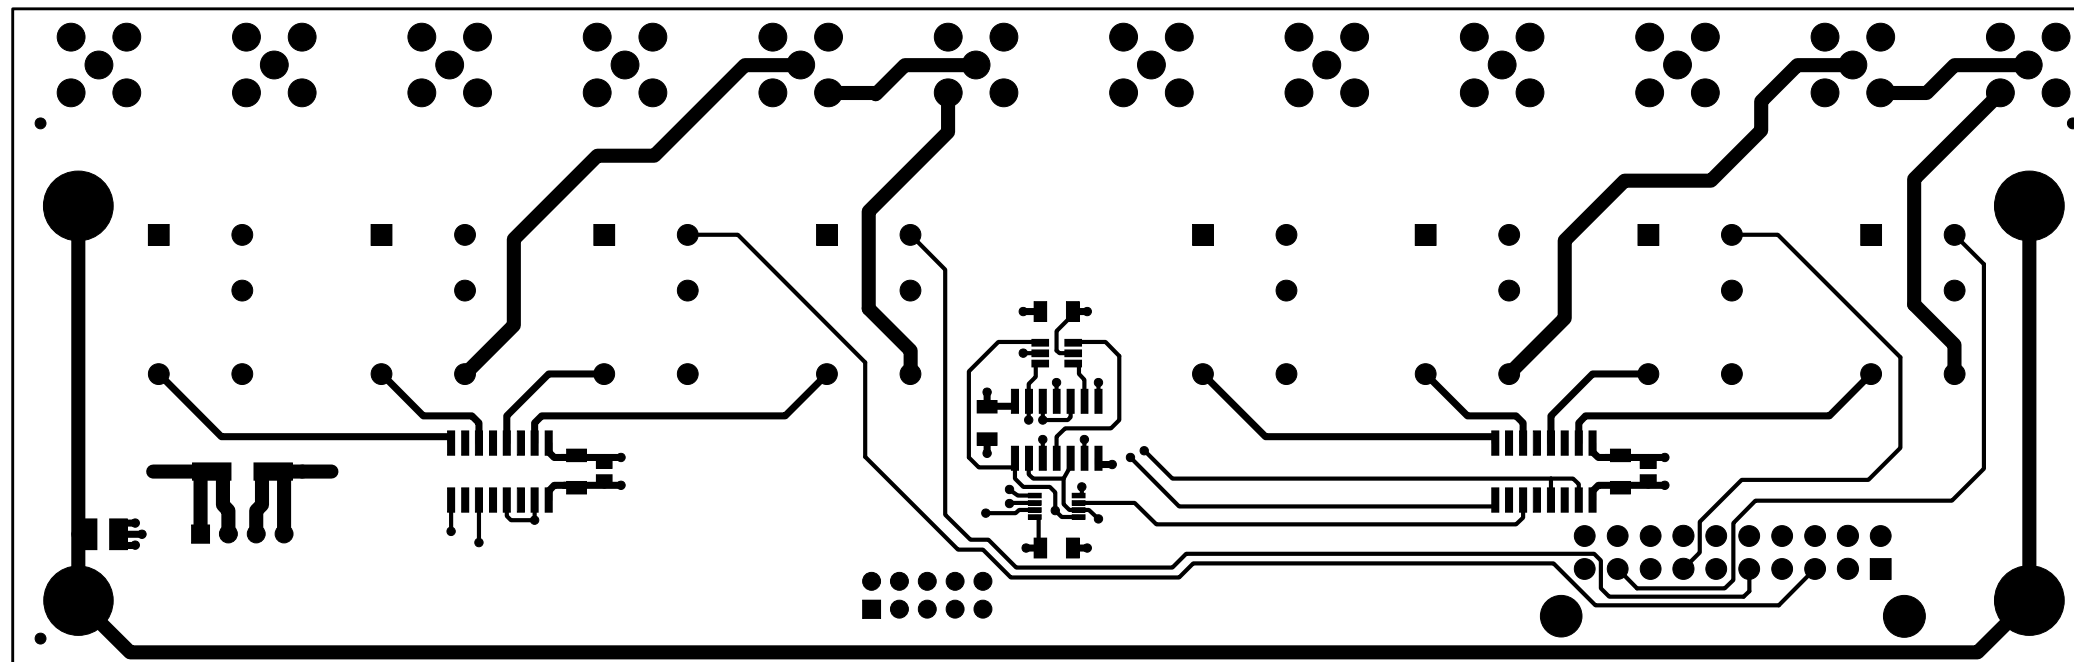


TOP SIDE
31-0005 REV 1

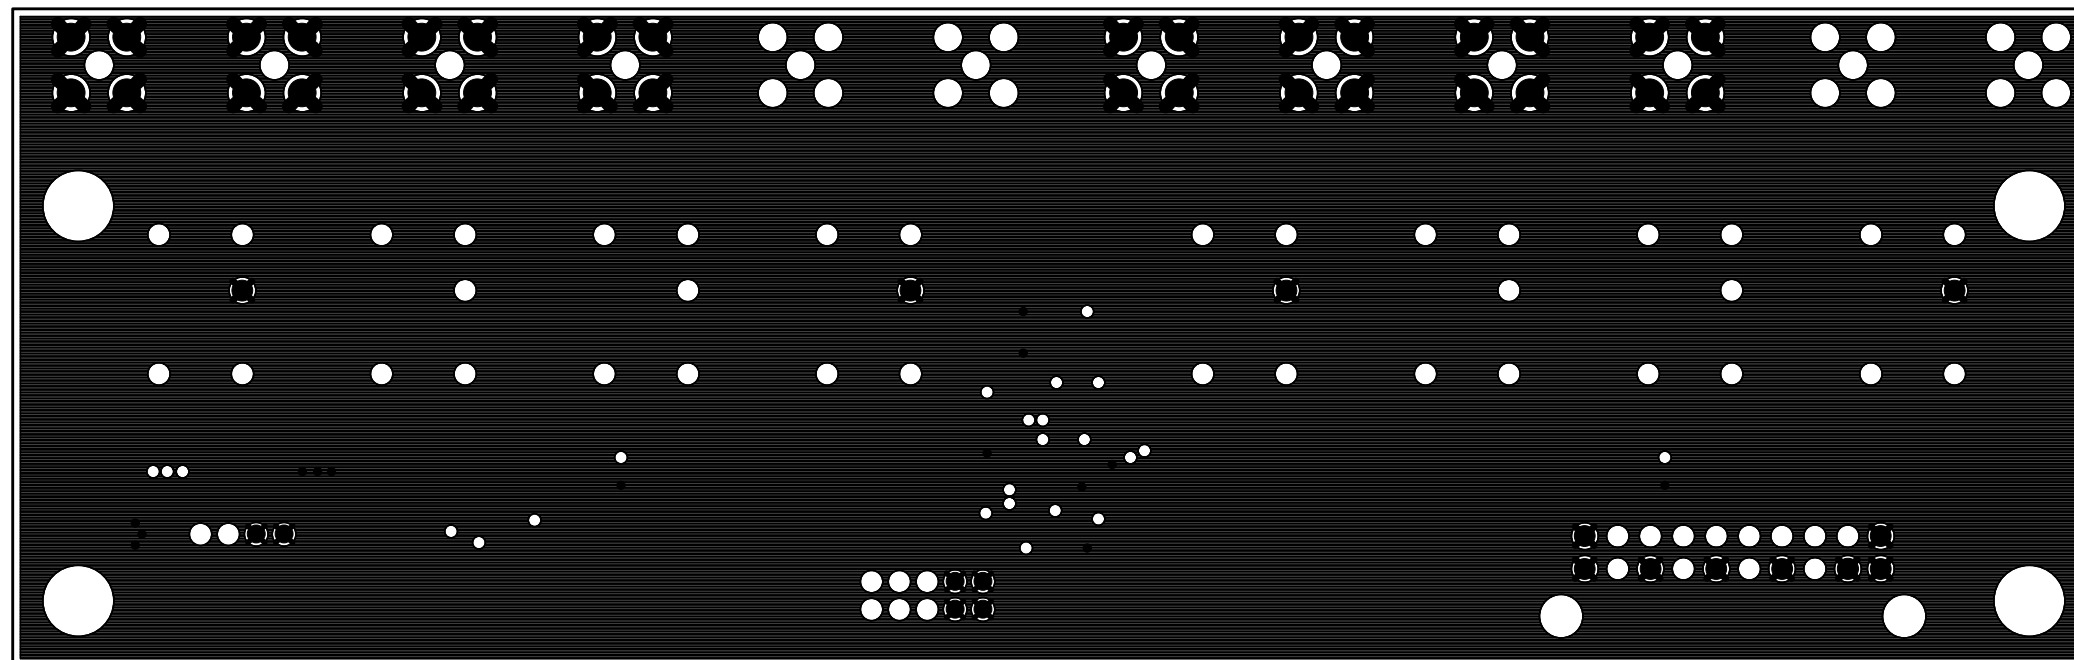

LAYER 2 GROUND
31-0005 REV 1

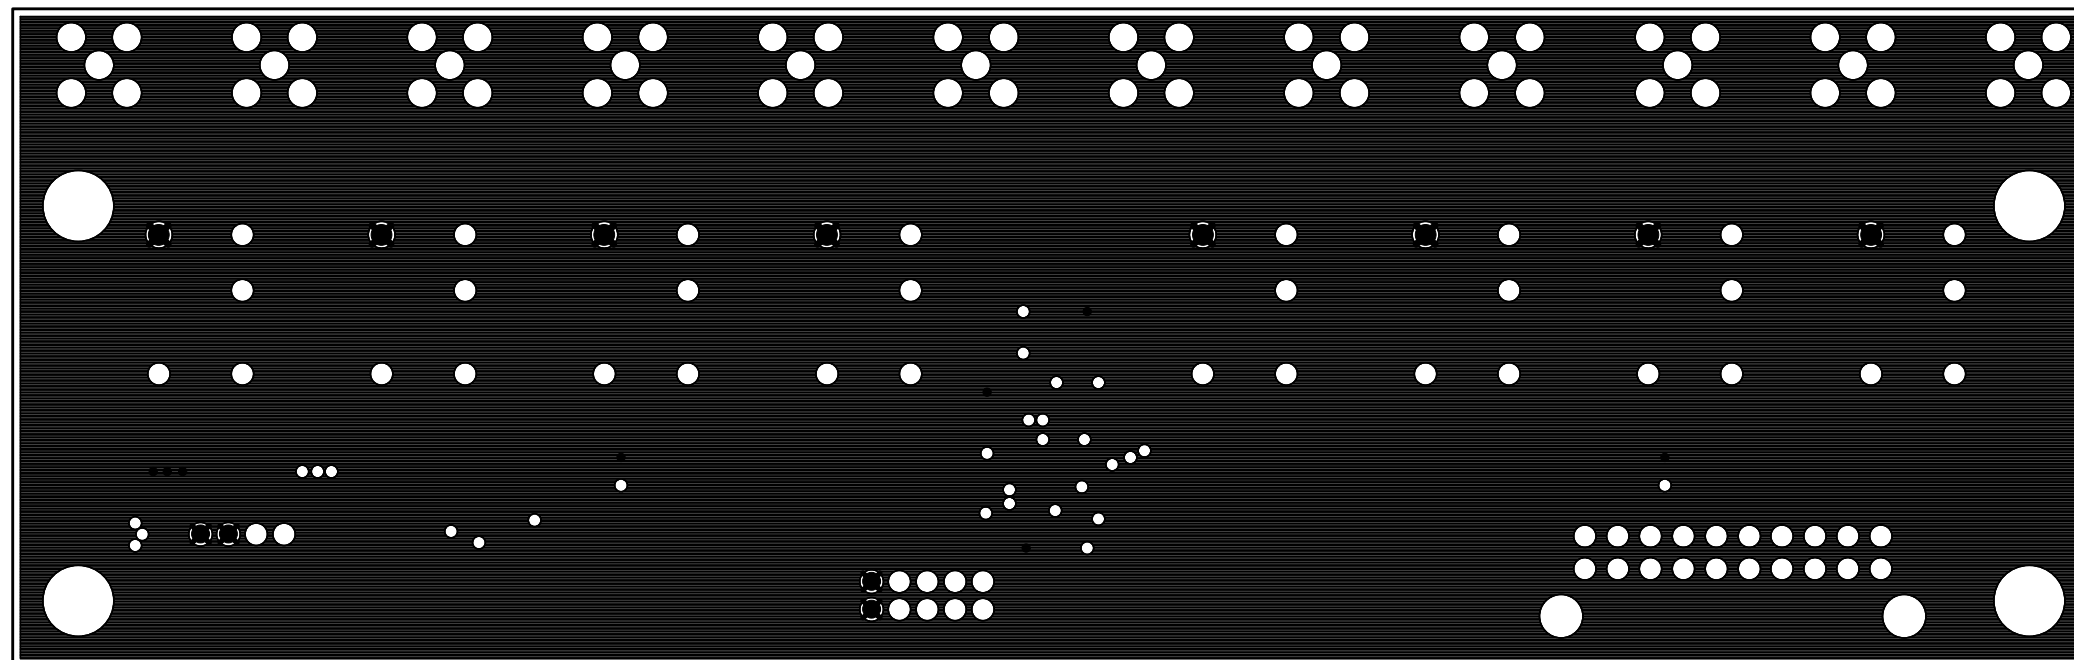

LAYER 3 POWER
31-0005 REV 1

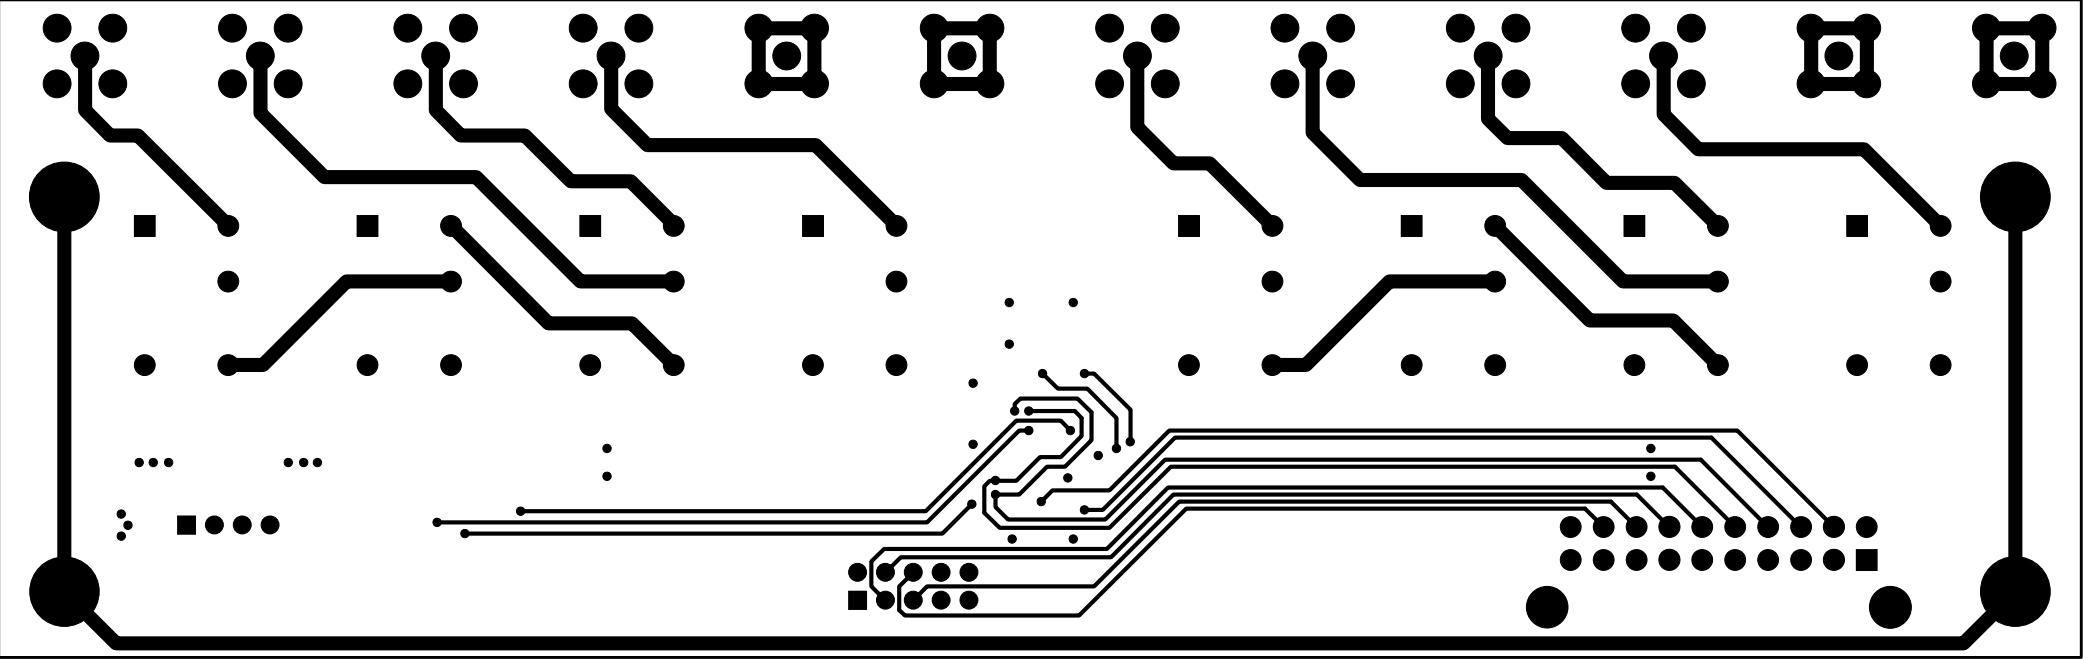

31-0005 REV 1
BOTTOM SIDE

31-0005 REV 1
SOLDERMASK BOTTOM SIDE

