


SILKSCREEN TOP SIDE


31-0001 REV 2

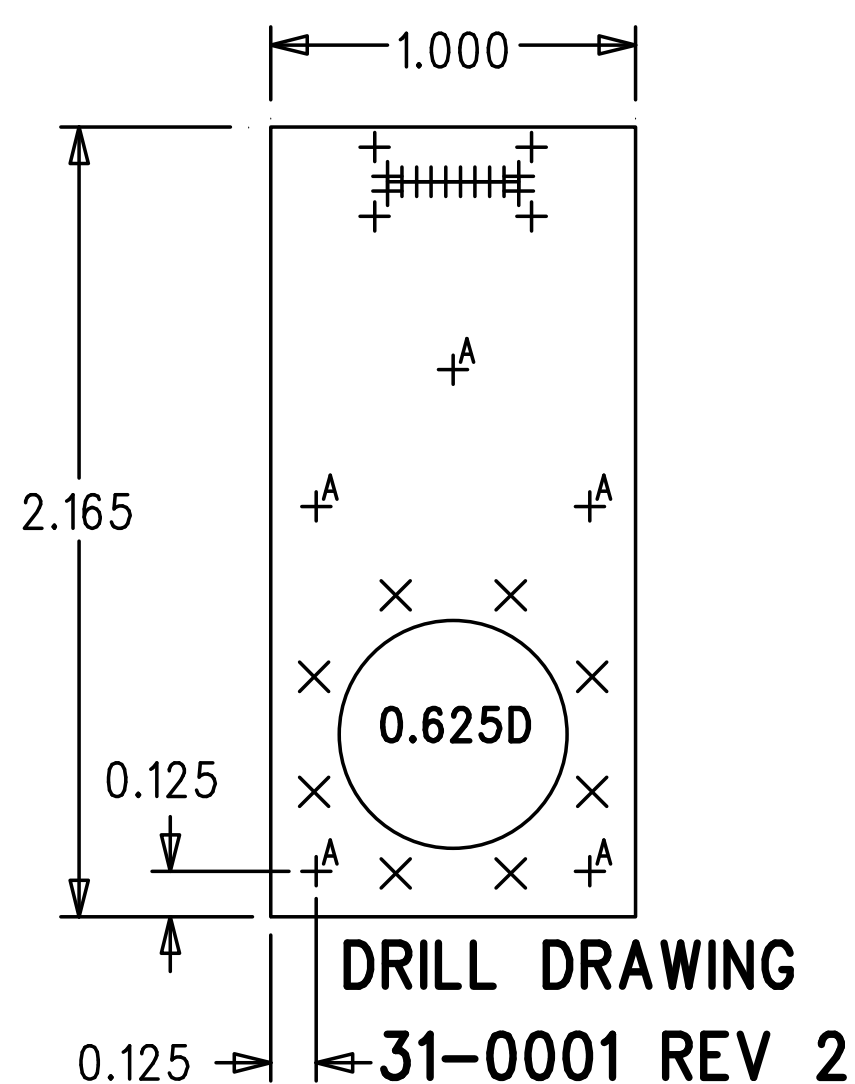


DRILL CHART			
SYMBOL	SIZE	QTY	PLATED TYPE
+	0.010 +0/-0.005	16	PLATED
×	0.032 +/-0.003	8	PLATED
A	0.096 +/-0.003	5	NON-PLATED

NOTES:


- MAT'L: 0.062 THK. FR4 COPPERCLAD LAMINATE.
- ALL HOLES TO BE PLATED THRU WITH A MINIMUM WALL THICKNESS OF 0.001.
- BOARDS TO BE LPIOBC ON BOTH SIDES – GREEN COLOR.
- BOARDS TO BE ENIG FINISH AFTER SOLDERMASK.
- BOARDS TO BE SILKSCREENED ON TOP SIDE WITH PERMANENT, WHITE EPOXY (CHEMICAL AND SCRATCH RESISTANT).
- BOARDS TO BE ELECTRICALLY TESTED FOR SHORTS AND OPENS.
- BOARDS SHALL BE MADE FROM UNDERWRITER LABORATORY RECOGNIZED MATERIAL AND THE FINISHED BOARD MUST CARRY THE VENDOR'S U.L. LOGO AND DATE CODE.
- ALL DRAWINGS AND FILMS VIEWED FROM TOP SIDE.

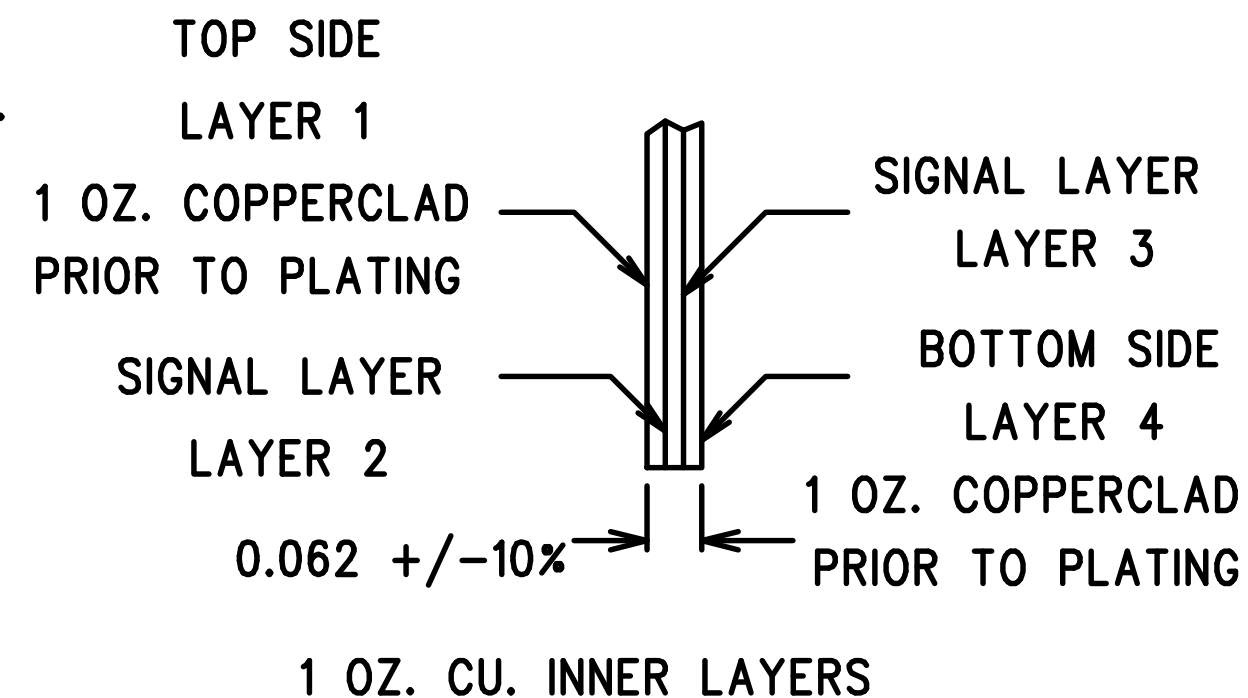

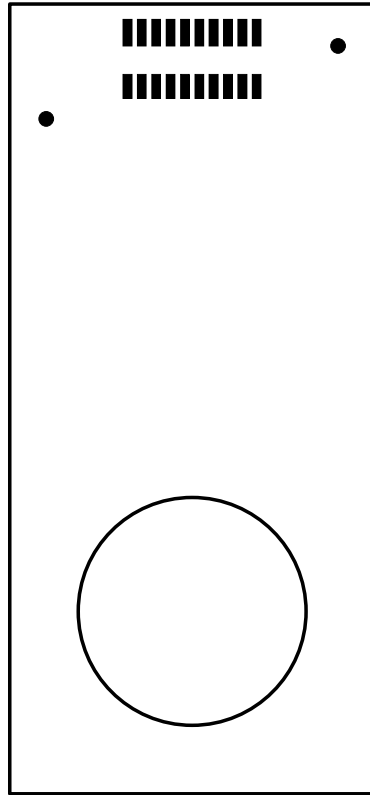


SOLDERPASTE

31-0001 REV 2

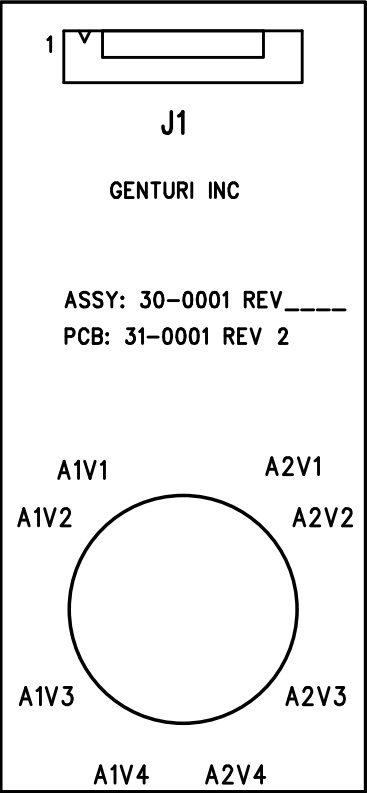


SILKSCREEN TOP SIDE

31-0001 REV 2

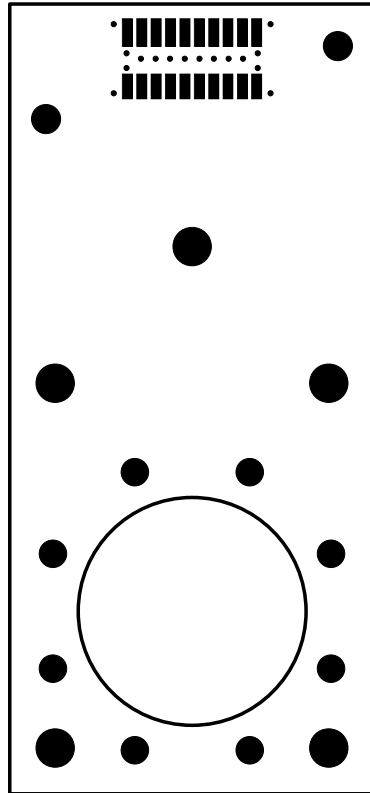


SOLDERMASK TOP SIDE
31-0001 REV 2

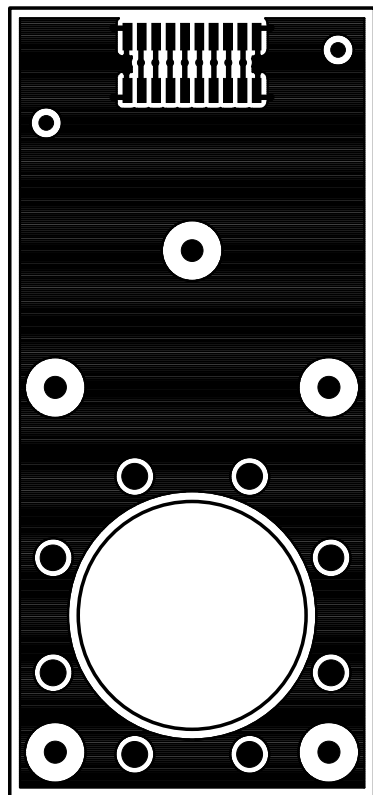


TOP SIDE


31-0001 REV 2

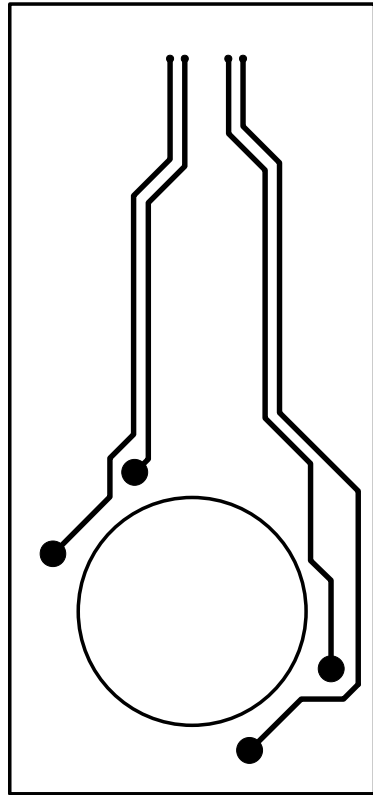

LAYER 2 SIGNAL
31-0001 REV 2

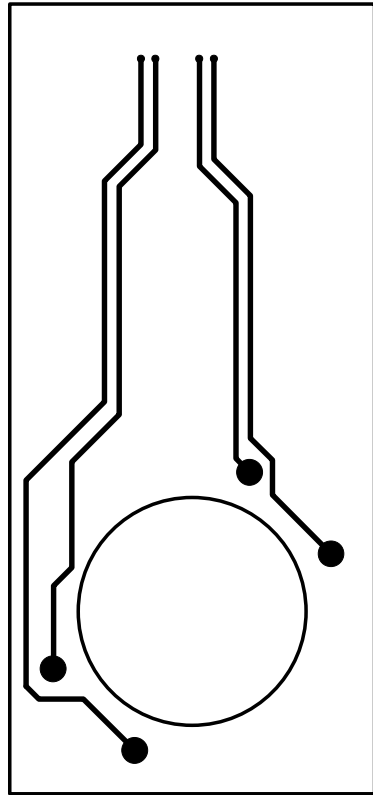


LAYER 3 SIGNAL
31-0001 REV 2

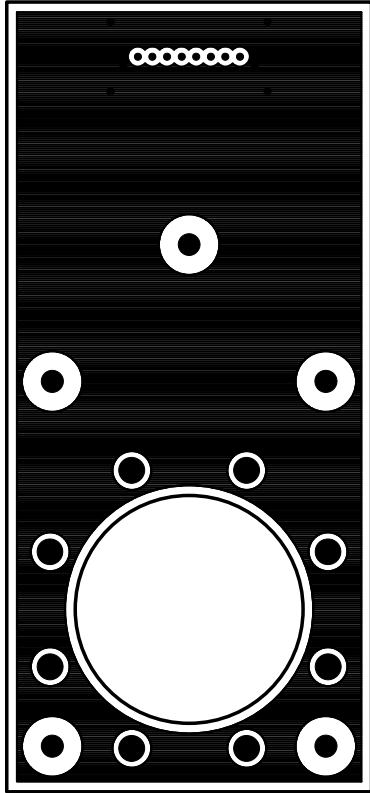

BOTTOM SIDE

31-0001 REV 2

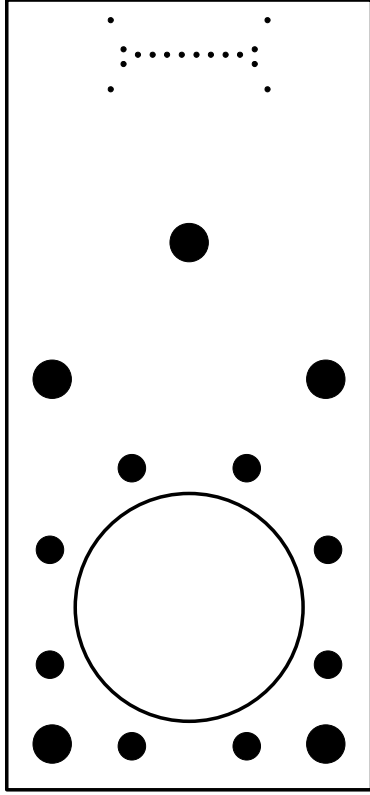

31-0001 REV 2
SOLDERMASK BOTTOM SIDE