



SILKSCREEN TOP SIDE

31-0002 REV 1

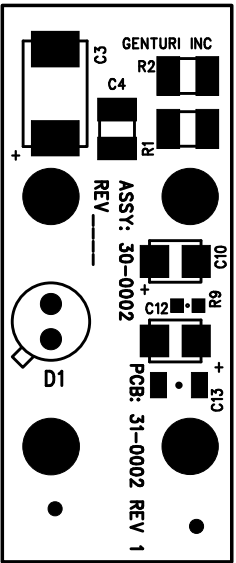

SILKSCREEN BOTTOM SIDE
1 VER 0002 REV 1

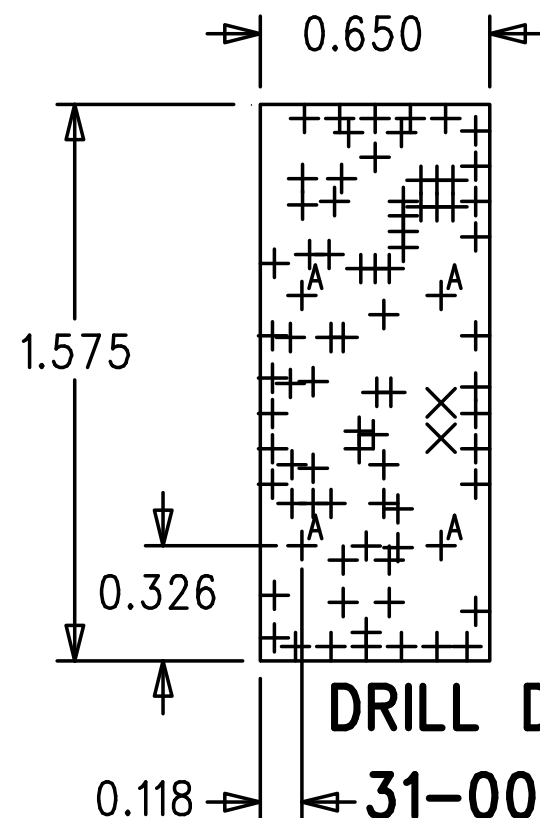



DRILL DRAWING
31-0002 REV 1

DRILL CHART			
SYMBOL	SIZE	QTY	PLATED TYPE
+	0.010 +0/-0.005	77	PLATED
X	0.035 +/-0.003	2	PLATED
A	0.096 +/-0.003	4	PLATED


NOTES:

1. MAT'L: 0.062 THK. FR4 COPPERCLAD LAMINATE.
2. ALL HOLES TO BE PLATED THRU WITH A MINIMUM WALL THICKNESS OF 0.001.
3. BOARDS TO BE LPIOBC ON BOTH SIDES – GREEN COLOR.
4. BOARDS TO BE ENIG FINISH AFTER SOLDERMASK.
5. BOARDS TO BE SILKSCREENED ON BOTH SIDES WITH PERMANENT, WHITE EPOXY (CHEMICAL AND SCRATCH RESISTANT).
6. BOARDS TO BE ELECTRICALLY TESTED FOR SHORTS AND OPENS.
7. BOARDS SHALL BE MADE FROM UNDERWRITER LABORATORY RECOGNIZED MATERIAL AND THE FINISHED BOARD MUST CARRY THE VENDOR'S U.L. LOGO AND DATE CODE.
8. ALL DRAWINGS AND FILMS VIEWED FROM TOP SIDE.

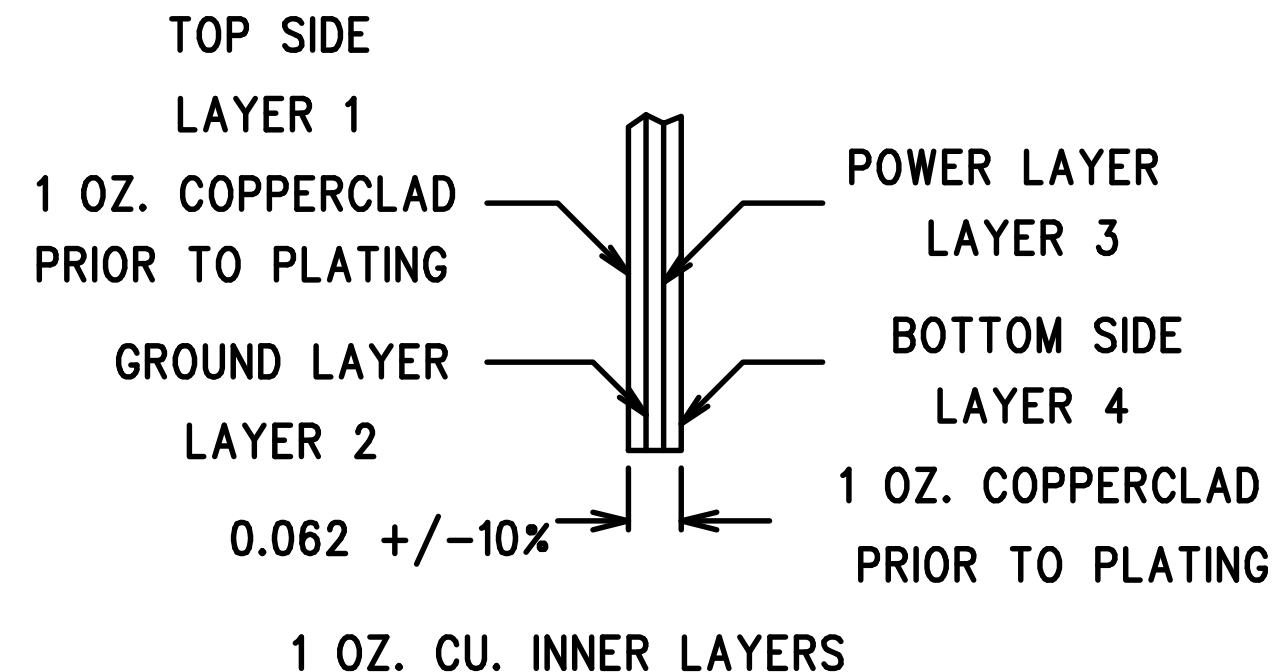

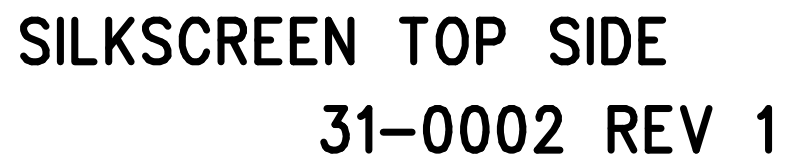


31-0002 REV 1

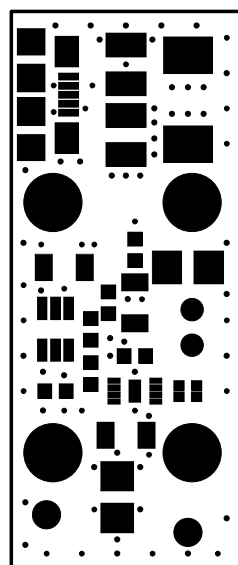


SOLDERMASK TOP SIDE

31-0002 REV 1

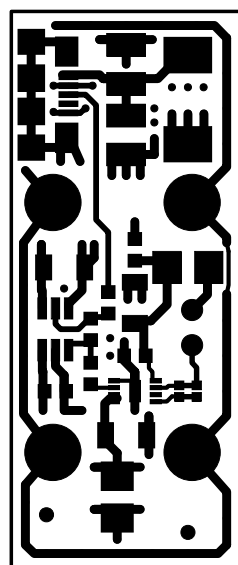


TOP SIDE

31-0002 REV 1

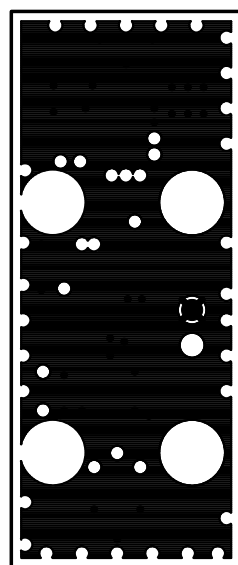


LAYER 2 GROUND

31-0002 REV 1

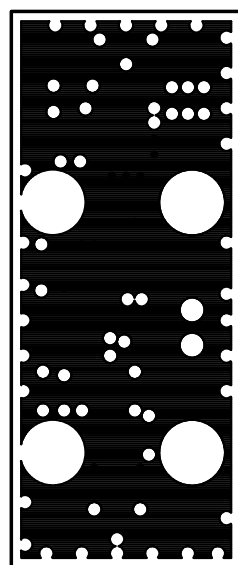


LAYER 3 POWER

31-0002 REV 1

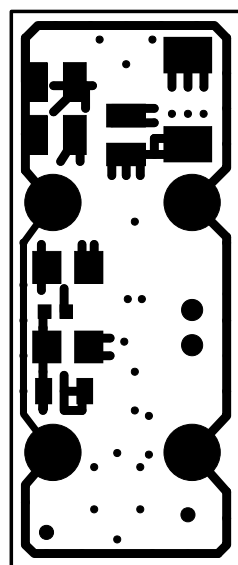


BOTTOM SIDE


31-0002 REV 1

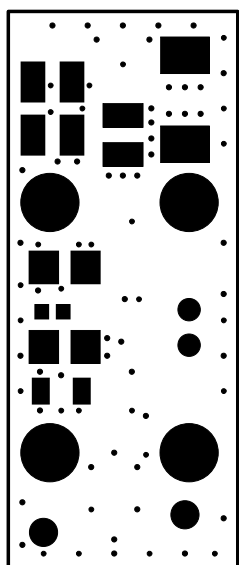

31-0002 REV 1
SOLDERMASK BOTTOM SIDE

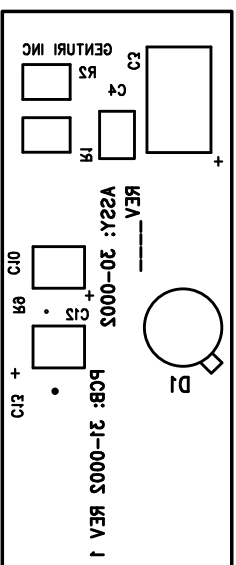

SILKSCREEN BOTTOM SIDE
31-0002 REV 1

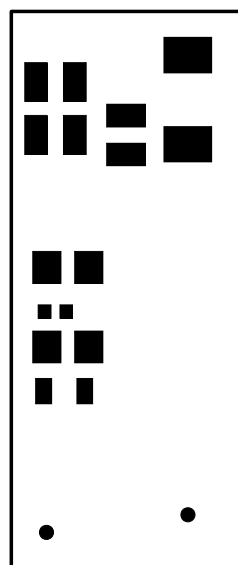

31-0002 REV 1