


SILKSCREEN TOP SIDE 31-0001 REV 1

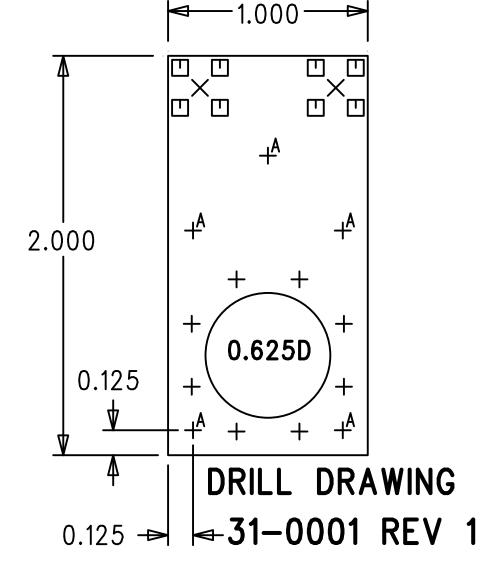

DRILL CHART			
SYMBOL	SIZE	QTY	PLATED TYPE
+	0.033 +/-0.003	8	PLATED
×	0.059 +/-0.003	2	PLATED
	0.063 +/-0.003	8	PLATED
A	0.096 +/-0.003	5	NON-PLATED

TOP SIDE

1 OZ. COPPERCLAD

LAYER 1

PRIOR TO PLATING

BOTTOM SIDE

LAYER 2


1 OZ. COPPERCLAD

→ 0.062 +/-10%


PRIOR TO PLATING

NOTES:


- 1. MAT'L: 0.062 THK. FR4 COPPERCLAD LAMINATE.
- 2. ALL HOLES TO BE PLATED THRU WITH A MINIMUM WALL THICKNESS OF 0.001.
- 3. BOARDS TO BE LPIOBC ON BOTH SIDES GREEN COLOR.
- 4. BOARDS TO BE HASL FINISH AFTER SOLDERMASK.
- 5. BOARDS TO BE SILKSCREENED ON TOP SIDE WITH PERMANENT, WHITE EPOXY (CHEMICAL AND SCRATCH RESISTANT).
- 6. BOARDS SHALL BE MADE FROM UNDERWRITER LABORATORY RECOGNIZED MATERIAL AND THE FINISHED BOARD MUST CARRY THE VENDOR'S U.L. LOGO AND DATE CODE.
- 7. ALL DRAWINGS AND FILMS VIEWED FROM TOP SIDE.

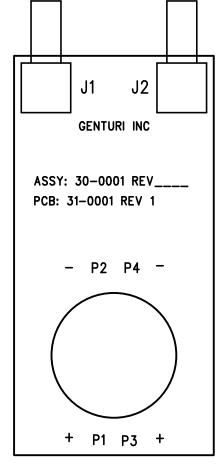


SILKSCREEN TOP SIDE 31-0001 REV 1

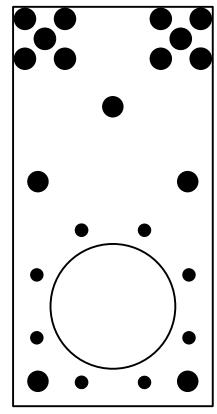


SOLDERMASK TOP SIDE 31-0001 REV 1

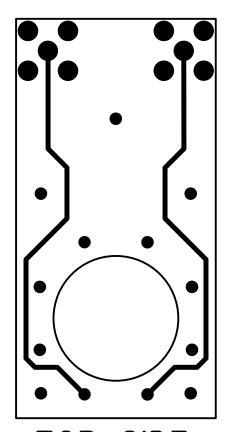

TOP SIDE 31-0001 REV 1

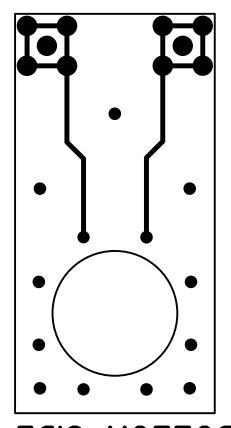

BOTTOM SIDE 1 V3R 1000–16

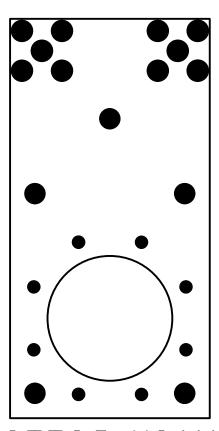

SOLDERMASK BOTTOM SIDE 1 V3R 1000-1E