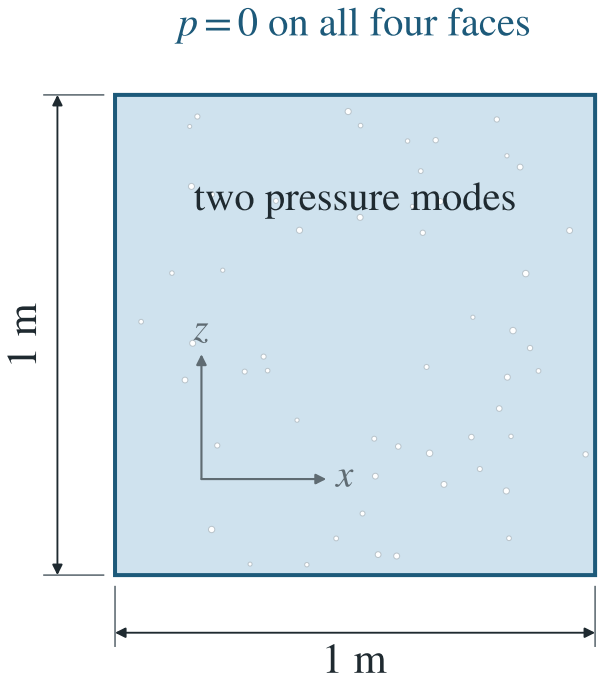

permeability changes at 0.5 s

$$\mathbf{k}_1 = k_0\,\mathrm{diag}(4, 1)$$

$$\mathbf{k}_2 = k_0\,\mathrm{diag}(2, 18)$$

pressure stays continuous

Fixed geometry; strain feedback into pressure disabled