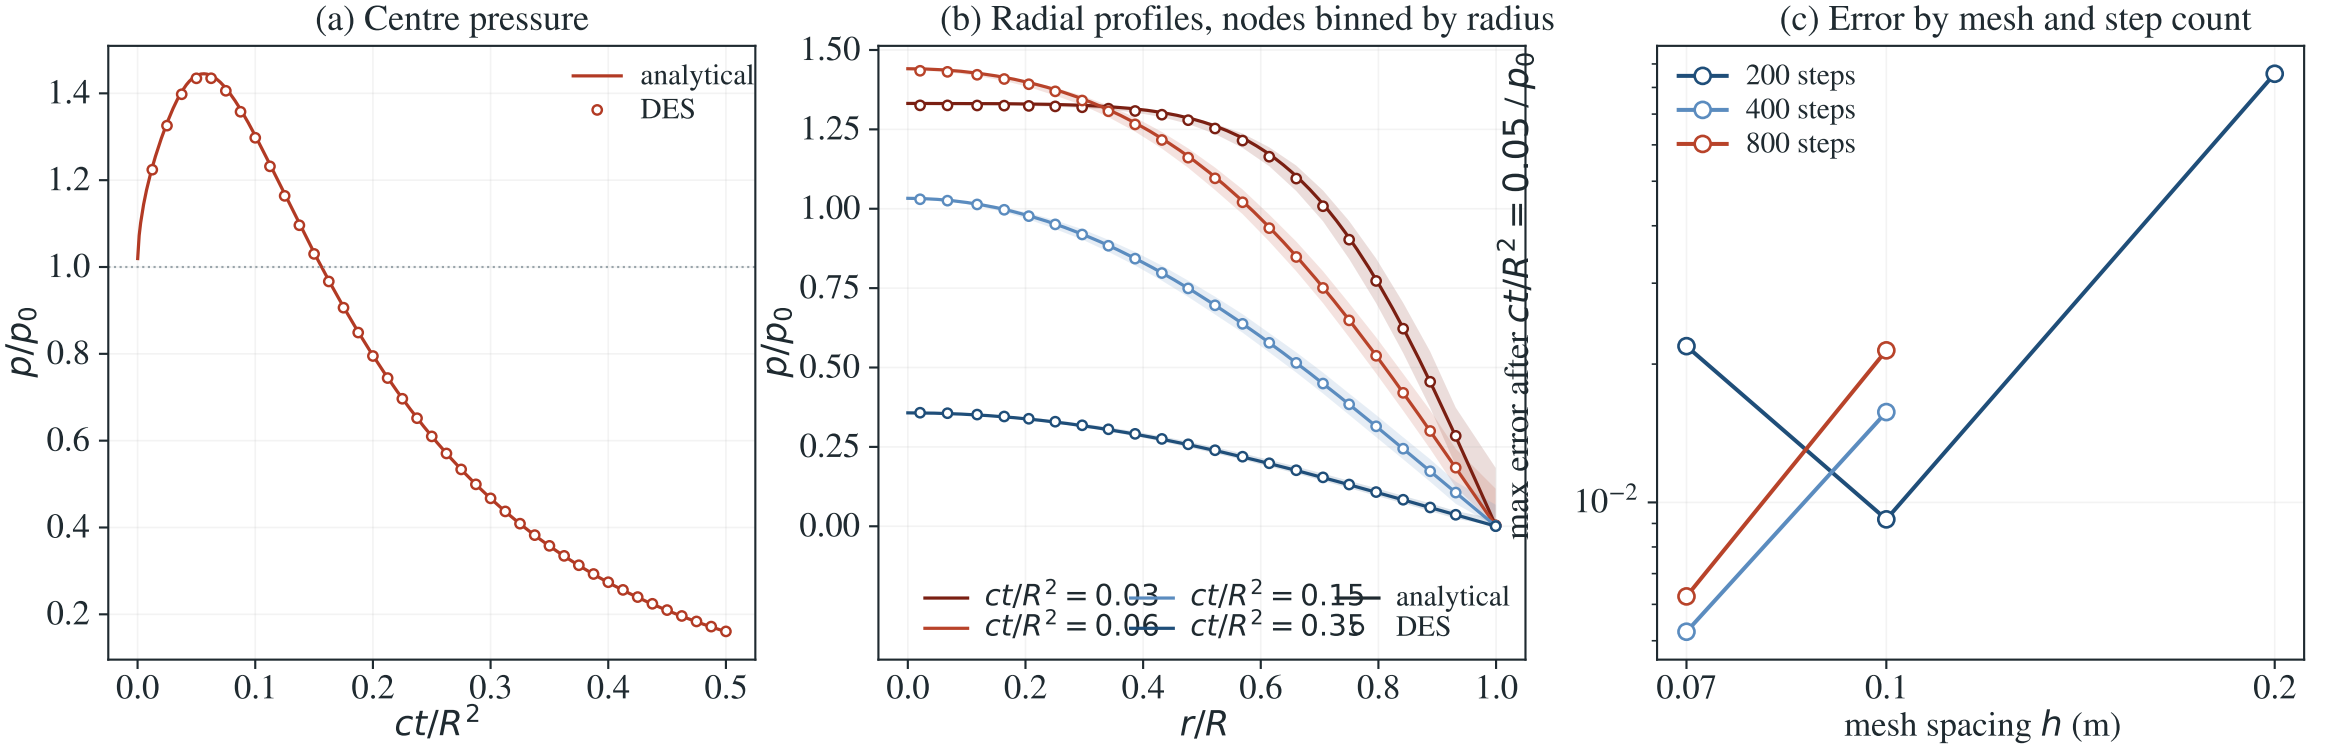

(a) Centre pressure
analytical
DES
p/p_0
ct/R^2
(b) Radial profiles, nodes binned by radius
p/p_0
r/R
$ct/R^2 = 0.03$
$ct/R^2 = 0.06$
$ct/R^2 = 0.15$
$ct/R^2 = 0.35$
analytical
DES
max error after $ct/R^2 = 0.05$ / p_0
(c) Error by mesh and step count
200 steps
400 steps
800 steps
10^{-2}
mesh spacing h (m)