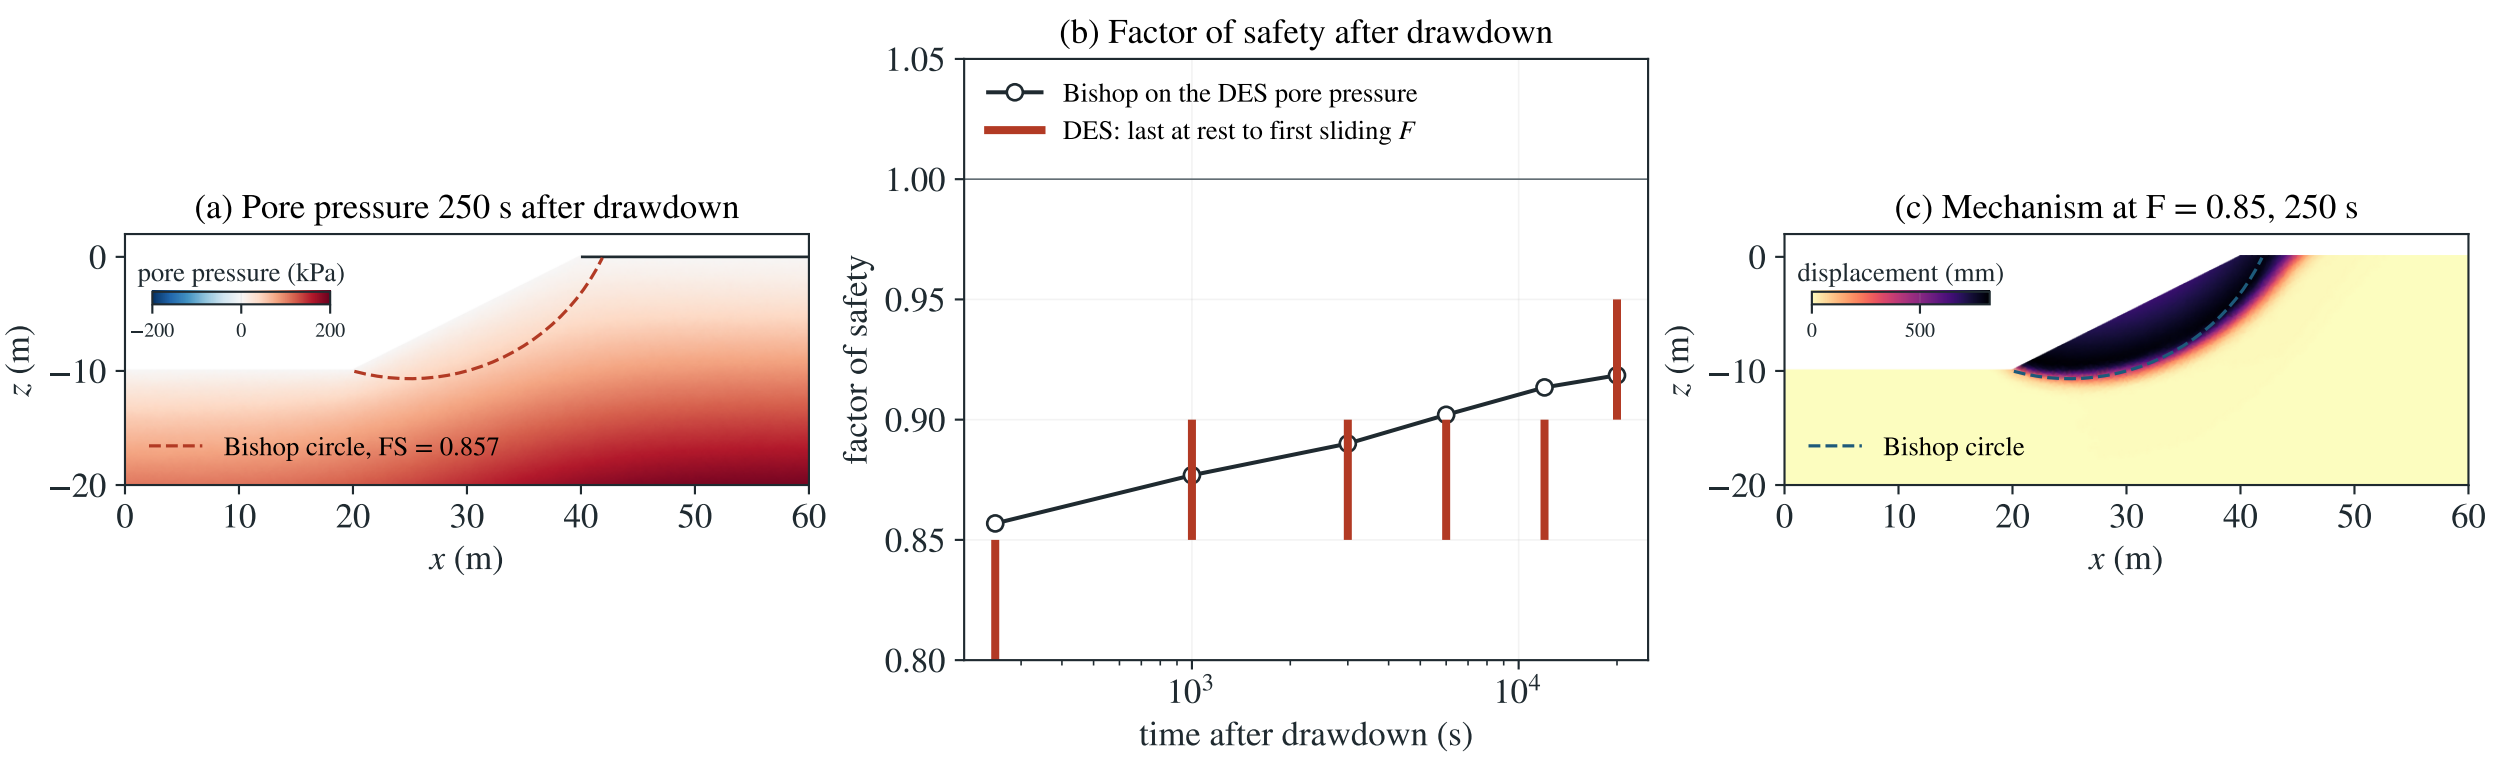

(a) Pore pressure 250 s after drawdown
pore pressure (kPa)
−200
0
200
Bishop circle, FS = 0.857
z (m)
x (m)
(b) Factor of safety after drawdown
Bishop on the DES pore pressure
DES: last at rest to first sliding F
factor of safety
time after drawdown (s)
(c) Mechanism at F = 0.85, 250 s
displacement (mm)
0
500
Bishop circle
z (m)
x (m)