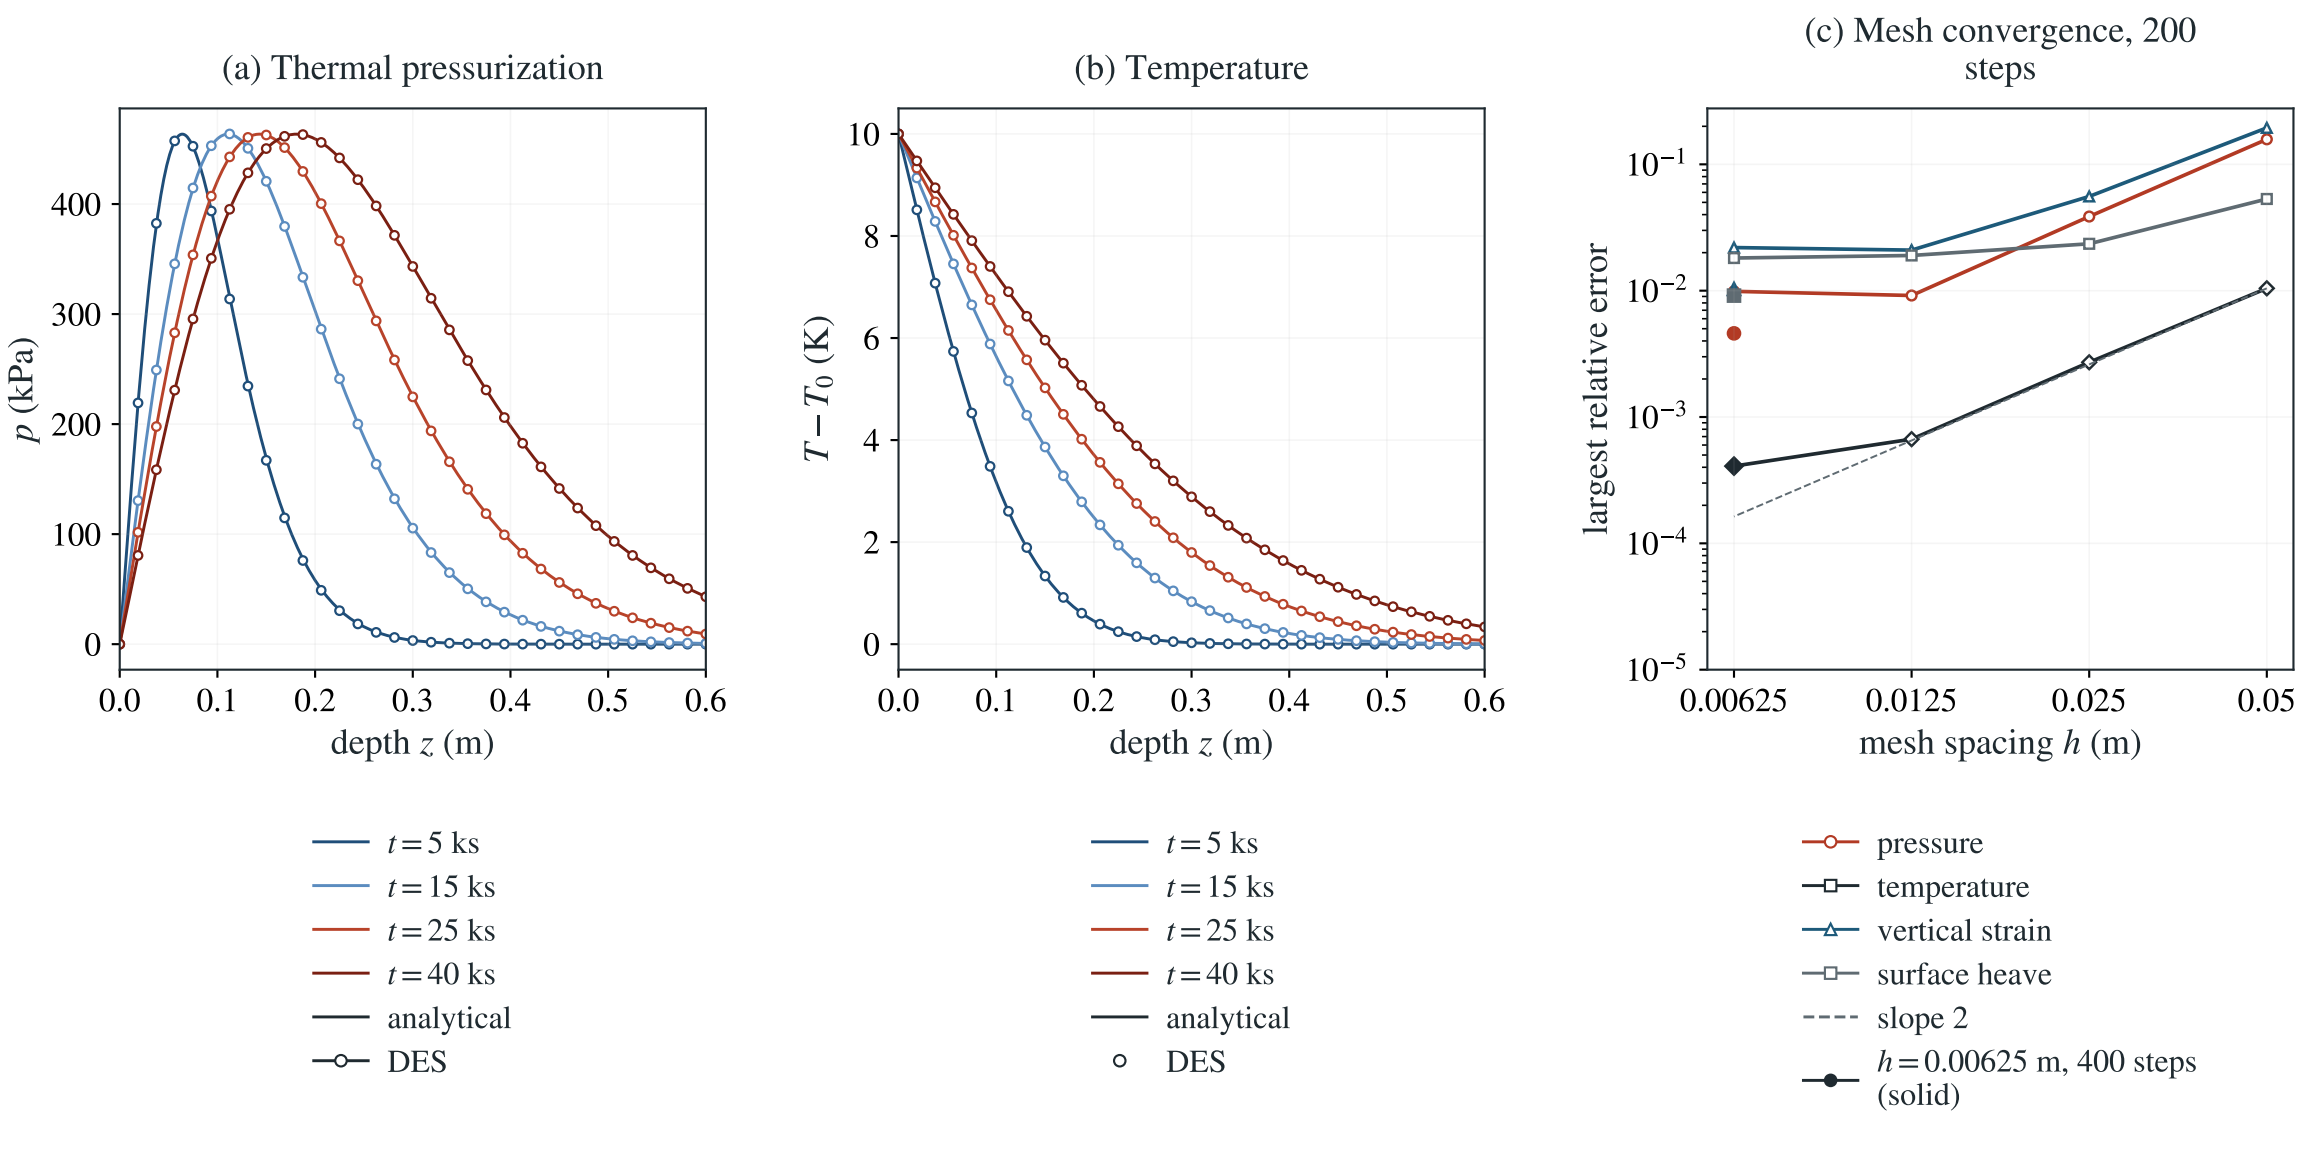

(a) Thermal pressurization
p (kPa)
depth z (m)
(b) Temperature
$T - T_0$ (K)
depth z (m)
(c) Mesh convergence, 200 steps
largest relative error
mesh spacing h (m)
$t = 5$ ks
$t = 15$ ks
$t = 25$ ks
$t = 40$ ks
analytical
DES
pressure
temperature
vertical strain
surface heave
slope 2
$h = 0.00625$ m, 400 steps (solid)