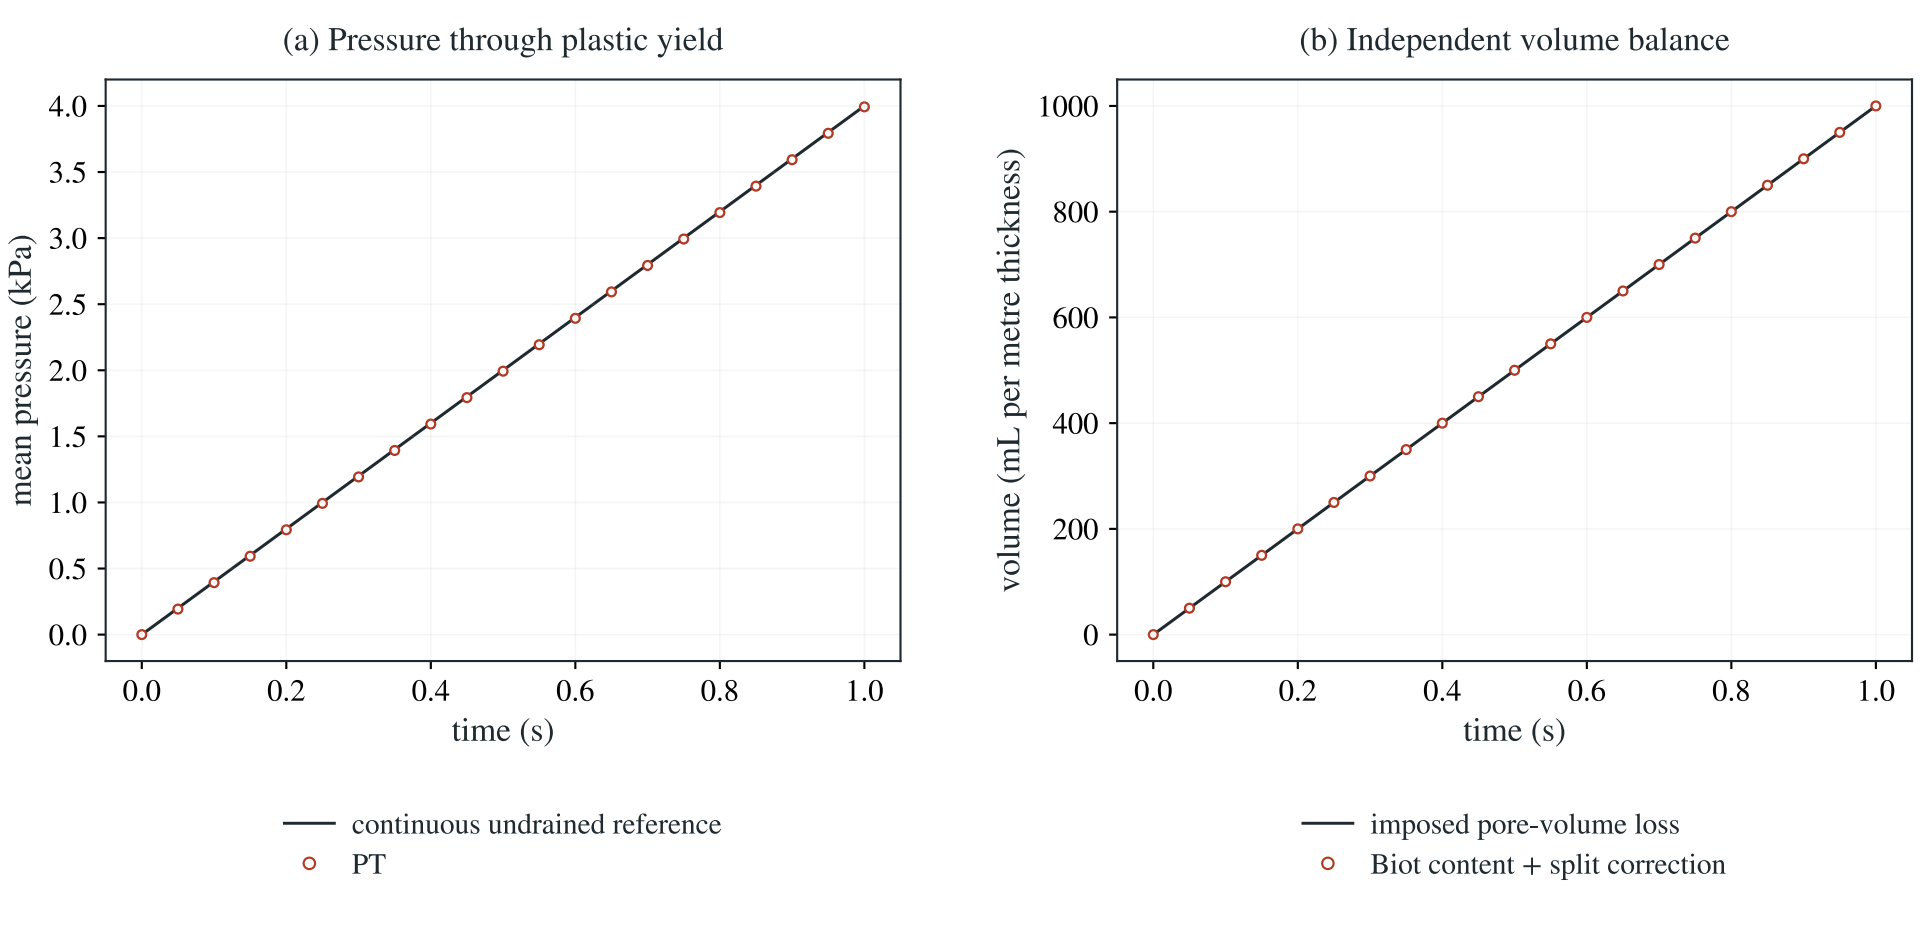

(a) Pressure through plastic yield
mean pressure (kPa)
4.0
3.5
3.0
2.5
2.0
1.5
1.0
0.5
0.0
0.0
0.2
0.4
0.6
0.8
1.0
time (s)
continuous undrained reference
PT
(b) Independent volume balance
volume (mL per metre thickness)
1000
800
600
400
200
0
0.0
0.2
0.4
0.6
0.8
1.0
time (s)
imposed pore-volume loss
Biot content + split correction