

# ATV320U02M2C

variable speed drive ATV320 - 0.18kW -  
200...240V - 1 phase - compact




## Main

range of product	Altivar Machine ATV320
product or component type	Variable speed drive
product specific application	Complex machines
device short name	ATV320
format of the drive	Compact
product destination	Asynchronous motors Synchronous motors
EMC filter	Class C2 EMC filter integrated
IP degree of protection	IP20 conforming to EN/IEC 61800-5-1
degree of protection	UL type 1 with UL type 1 conformity kit
type of cooling	Fanless
network number of phases	1 phase
[Us] rated supply voltage	200...240 V (- 15...10 %)
supply frequency	50...60 Hz (- 5...5 %)
motor power kW	0.18 kW for heavy duty
motor power hp	0.25 hp for heavy duty
line current	2.8 A at 240 V for heavy duty 3.4 A at 200 V for heavy duty
prospective line Isc	<= 1 kA
apparent power	0.7 kVA at 240 V for heavy duty
continuous output current	1.5 A at 4 kHz for heavy duty
maximum transient current	2.3 A during 60 s for heavy duty
asynchronous motor control profile	Voltage/Frequency ratio - Energy Saving, quadratic U/f Flux vector control without sensor - Energy Saving Flux vector control without sensor, standard Voltage/Frequency ratio, 2 points Voltage/Frequency ratio, 5 points
synchronous motor control profile	Vector control without sensor
nominal switching frequency	4 kHz
switching frequency	2...16 kHz adjustable
safety function	STO (safe torque off) SIL 2
communication port protocol	Modbus CANopen
option card	Communication module: DeviceNet Communication module: CANopen SUB-D 9 Communication module: Profibus DP V1 Communication module: EtherCAT RJ45 Communication module: Profinet Communication module: CANopen daisy chain RJ45 Communication module: Ethernet Powerlink Communication module: Ethernet/IP Communication module: CANopen open style terminal block

The information provided in this documentation contains general descriptions and/or technical characteristics of the products of the Schneider Electric group. It is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

## Complementary

output voltage	$\leq$ power supply voltage
permissible temporary current boost	1.5 x I <sub>n</sub> during 60 s for heavy duty
speed range	1...100 with asynchronous motor in open-loop mode
speed accuracy	+/- 10 % of nominal slip 0.2 T <sub>n</sub> to T <sub>n</sub>
torque accuracy	+/- 15 %
transient overtorque	170...200 % of nominal motor torque
braking torque	< 170 % with braking resistor during 60 s
regulation loop	Adjustable PID regulator
motor slip compensation	Adjustable 0...300 % Automatic whatever the load Not available in voltage/frequency ratio (2 or 5 points)
acceleration and deceleration ramps	CUS Linear Ramp switching Deceleration ramp automatic stop DC injection Deceleration ramp adaptation S U
braking to standstill	By DC injection
protection type	Drive: thermal protection Drive: overheating protection Drive: short-circuit between motor phases Drive: overcurrent between output phases and earth Drive: input phase breaks
frequency resolution	Analog input: 0.012/50 Hz Display unit: 0.1 Hz
electrical connection	Power supply, screw terminal: 2.5...4 mm <sup>2</sup> AWG 14...AWG 12 Control, screw terminal: 0.5...1.5 mm <sup>2</sup> AWG 20...AWG 16 Motor/Braking resistor, screw terminal: 2.5...4 mm <sup>2</sup> AWG 14...AWG 12
type of connector	1 RJ45 for Modbus/CANopen on control terminal
physical interface	2-wire RS 485 for Modbus
transmission frame	RTU for Modbus
transmission rate	4.8, 9.6, 19.2, 38.4 kbit/s for Modbus 50 kbps, 125 kbps, 250 kbps, 500 kbps, 1 Mbps for CANopen
data format	8 bits, configurable odd, even or no parity for Modbus
type of polarization	No impedance for Modbus
number of addresses	1...127 for CANopen 1...247 for Modbus
method of access	Slave for CANopen
supply	Internal supply for reference potentiometer (1 to 10 kOhm): 10.5 V DC (+/- 5 %) current $\leq$ 10 mA (overload and short-circuit protection)
local signalling	1 LED green for CANopen run 1 LED red for drive fault 1 LED red for CANopen error
width	72 mm
height	143 mm
depth	109 mm
product weight	0.8 kg
analogue input number	3
analogue input type	Voltage (AI1): 0...10 V DC, impedance 30000 Ohm, resolution 10 bits Bipolar differential voltage (AI2): +/- 10 V DC, impedance 30000 Ohm, resolution 10 bits Current (AI3): 0...20 mA (or 4-20 mA, x-20 mA, 20-x mA or other patterns by configuration), impedance 250 Ohm, resolution 10 bits
discrete input number	7
discrete input type	Programmable (sink/source) (DI1...DI4): 24...30 V DC: level 1 PLC Programmable as pulse input 20 kpps (DI5): 24...30 V DC: level 1 PLC Switch-configurable PTC probe (DI6): 24...30 V DC Safe torque off (STO): 24...30 V DC, impedance 1500 Ohm
discrete input logic	Negative logic (sink): : DI1...DI6, > 19 V (state 0) < 13 V (state 1) Positive logic (source): : DI1...DI6, < 5 V (state 0) > 11 V (state 1)
analogue output number	1

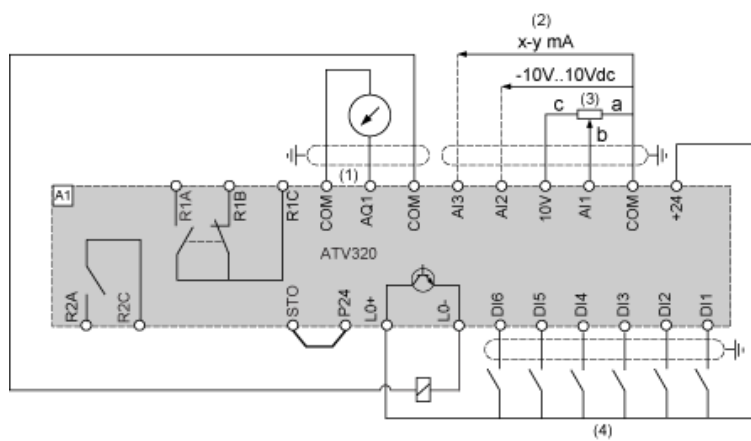

- (1) Analog output
- (2) Analog inputs
- (3) Reference potentiometer (10 kOhm maxi)
- (4) Digital inputs