



# ESASGD 2016

GIS-IDEAS (2016)

Conference Title: International Conference on GeoInformatics for Spatial-Infrastructure Development in Earth & Allied Sciences (GIS-IDEAS)

## Research application of the InSAR technology for determining changes in surface topography

Hai Minh Nguyen <sup>a\*</sup>, Hoa T. Thanh Pham <sup>b</sup>, Ha Thanh Tran <sup>c</sup>

<sup>a,b,c</sup> *Hanoi University of Mining and Geology, 18 Vien Street, Duc Thang ward, Bac Tu Liem Distric, Hanoi, S.R. Vietnam*

---

### Abstract

In recent years, the Synthetic Aperture Radar Interferometry (InSAR) is widely applied and it provides reliable results for determining Digital Elevation Model, and vertical and horizontal land deformation. All these applications are based on the analysis of the phase difference between two pairs of Radar interferometry. To determine the surface deformation, we can use 2 or 3 photo images to form two pairs of interference, one is used to determine interference topography, while the other is for determining interferometer containing topography and topography deformation. Topography deformation will be determined by removing the interference pattern topography or minimized to the extent not substantially interfering in the pair containing deformation. This paper introduces InSAR technique in determining surface subsidence and experimental result in Hanoi city with TeraSAR- X images has identified areas of North Thang Long Industrial subsidence (-41mm/ year) during the period 2012 to 2013.

"Keywords: INSAR, Radar interferometry, surface subsidence"

---

### 1. Introduction

In the past years, the determination of the topographical surface changes is measured by leveling and caculating the height values among the monitoring cycles . Such monitoring is only applied for local works without determining the changes in large areas . In recent years, Synthetic Aperture Radar (SAR) is developed with the advantages of allowing the collection of high -resolution images and from three images collected from SAR techniques , we can identify the changes of topographical surfaces based on the use of phase information of the signal Radar .

By analyzing the height of the topography we can determine that the baseline is the distance between two times recording images and that the interference of the two images can be used to calculate the height of the terrain . In other cases such defined land surface deformation may use 2 or 3 images to form two pairs of interference , including a pair for determining interference topography while the another pair for determining interferogram containing topography and topography deformation. Topography deformation will be determined by removing the interference pattern topography or minimized to the extent not substantially interfering in the pair contains deformation.

In the world, there are many scientific research projects about Radar data applications to the issues of digital elevation model DEM and topography deformation. In Vietnam, there have been some studies such as: "Applied research methods in monitoring INSAR differential land subsidence due to groundwater exploitation " of the Institute of Geography in 2008-2009 ; "Science-based research and suggesting forcasting solutions to land

---

\* Corresponding author. Tel.: +084.978144988;  
E-mail address: minhhai51@gmail.com

subsidence in Hanoi by interferometry radar techniques ", code : DTDL.2012 - T/28 of the Institute of Geology - Academy of Vietnam science ...

## 2. InSAR

InSAR is a signal processing technology that can link two images recorded at two different time at the same region to form interference phase. These interference phases include topographical phase, reference phase and fluctuation phase. So to identify the topographic change, we need to find the ways to separate the fluctuation phase. There are several methods to separate the fluctuation phase (also known as terrain shifting phase) such as the Two-pass, Three or Four-pass method. Two-pass method uses 1 DEM and 1 pair of image interference (the time before and the time after fluctuations), Three-pass method is a method using 3 images at three different periods, that two images are used to create a pair of interference for the DEM. Four-pass method uses 4 photos at 4 different times. In the experiments we used differential InSAR Three-pass method.

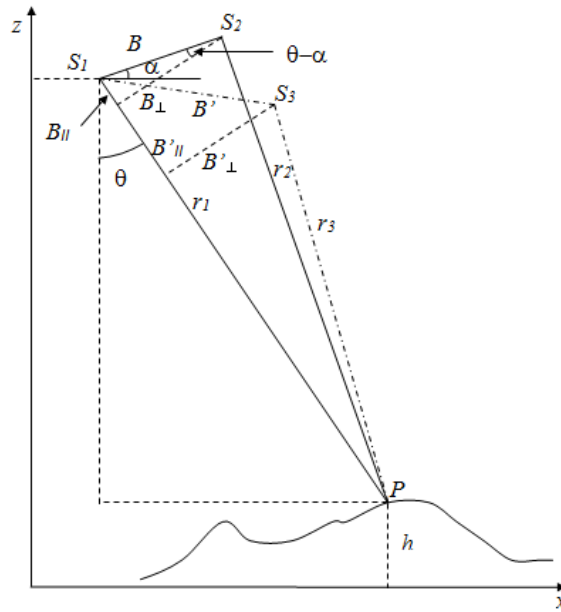


Fig. 1. The differential Three-pass InSAR methods

Three -pass method was first introduced by Zebker and his partners (1994). In figure 1  $S_1$ ,  $S_2$ ,  $S_3$  are the three points of time collecting images of radar satellite. From these 3 images we can create 2 pairs of interferometer. Supposing that there is only one pair of interferometer affected by terrain shifting, for example, the  $\phi_{1-2}$  phase is the interference phase containing only terrain factors and the  $\phi_{1-3}$  phase contains the change of terrain.

Phase terrain can be collected by subtracting two interference phases which are created from 3 images from 3 different times.

$$\phi_{1-2} = -\frac{4\pi}{\lambda} B \sin(\theta - \alpha) = -\frac{4\pi}{\lambda} B_{||} \quad (1)$$

$$\phi_{1-3} = -\frac{4\pi}{\lambda} B' \sin(\theta - \alpha') + \frac{4\pi}{\lambda} \Delta r = -\frac{4\pi}{\lambda} (B'_{||} - \Delta r) \quad (2)$$

Where:

$\phi_{1-2} = \Phi_1 - \Phi_2$  defines terrain phase and there is no terrain changes

$\phi_{1-3} = \Phi_1 - \Phi_3$  denotes changing phase

$\alpha$  is the angle of the image B baseline

$\alpha'$  is the angle of image B' baseline

$B_{||}$  is the projection of B on its view direction

$B'_{||}$  is the projection of B' on its view direction

$\Delta r$  is the component moved parallelly to the radar.

If  $\Delta\phi$  is the changing phase of topography, we will have:

$$\Delta\phi = \phi_{1-3} - \left( \frac{B'_{11}}{B_{11}} \right) \phi_{1-2} \quad (3)$$

Then we get the link between the changing phase  $\Delta\phi$  and terrain change, therefore we have  $\Delta r$  as follows:

$$\Delta r = \frac{\lambda}{4\pi} \Delta\phi = \left( \frac{\lambda}{2} \right) \left( \frac{\Delta\phi}{2\pi} \right) \quad (4)$$

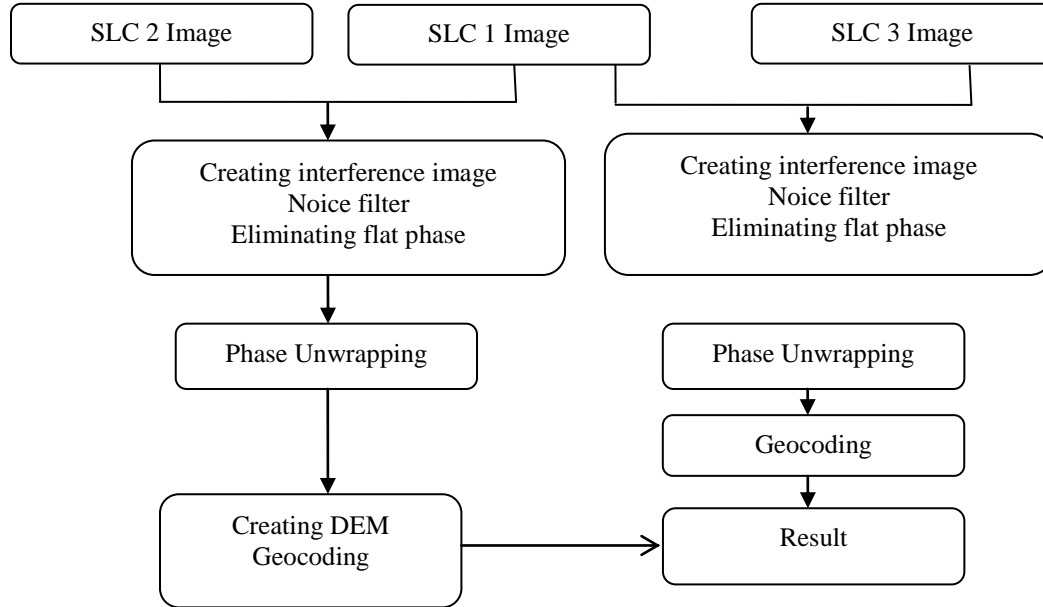


Fig. 2. Diagram of the technical process to determine the changes in topography

The combination of two SAR images can form SAR interferometry to provide information about the third dimension (height) of an object and to measure the movement of an object in image acquisition times.

- Phase flattening and noise filtering for interference image resolve the problem of easier opening phase.
- Phase Unwrapping: image interference may lose an integer times of the cycle of the measured phase value, so the exact recovery lost some cycles are important issues for the study of the deformation, established elevation models, topographic mapping... the accuracy depends on the method of phase unwrapping problem.

### 3. Experimental results

#### 3.1. About the scope of the study

Located slightly to the northwest of the center of the Red River delta, Hanoi is between 20° 53' to 21° 23' north latitude and 105° 44' to 106° 02' east longitude, bordered by the provinces of Thai Nguyen, Vinh Phuc to the north; Ha Nam, Hoa Binh to the south, Bac Giang, Bac Ninh and Hung Yen provinces to the east; Hoa Binh and Phu Tho to the west.

#### 3.2. Result

Three photos taken on 10/04/2012, 26/06/2012 and 04/30/2013 from German satellite TerraSAR-X (2007) were selected for processing by SARscape 4.3 software.

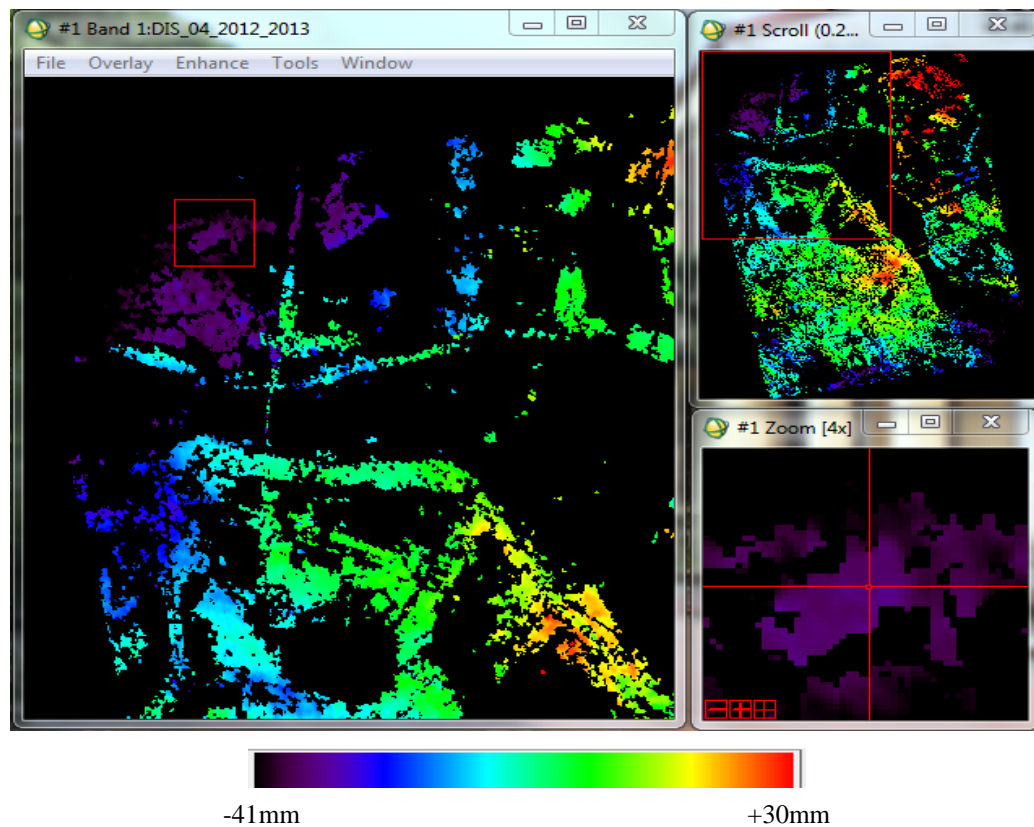


Fig. 3. The confrimation result of change of surface topography

Some areas are black and unvaluable because of the region ircorrelation between images, some well-correlated areas show that the experimental results of Hanoi indicate the minor change in the surface eg subsidence (-41mm / year) of the North Thang Long Industrial zone (Fig 4) in the period of 2012 to 2013.

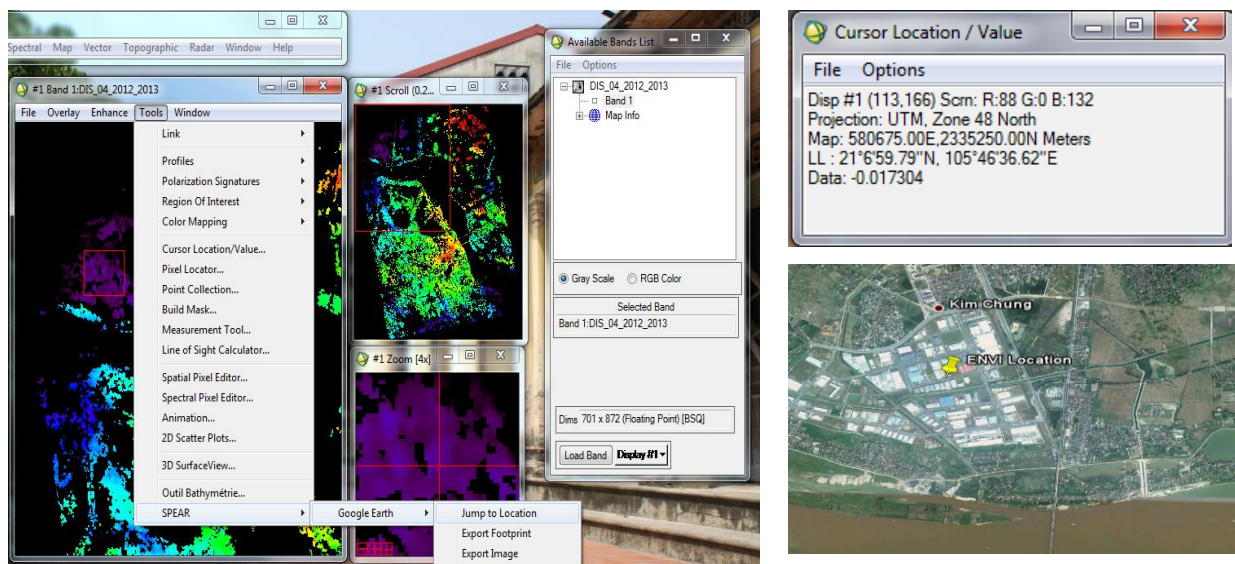


Fig. 4. Export changes in the terrain surface to Google Earth

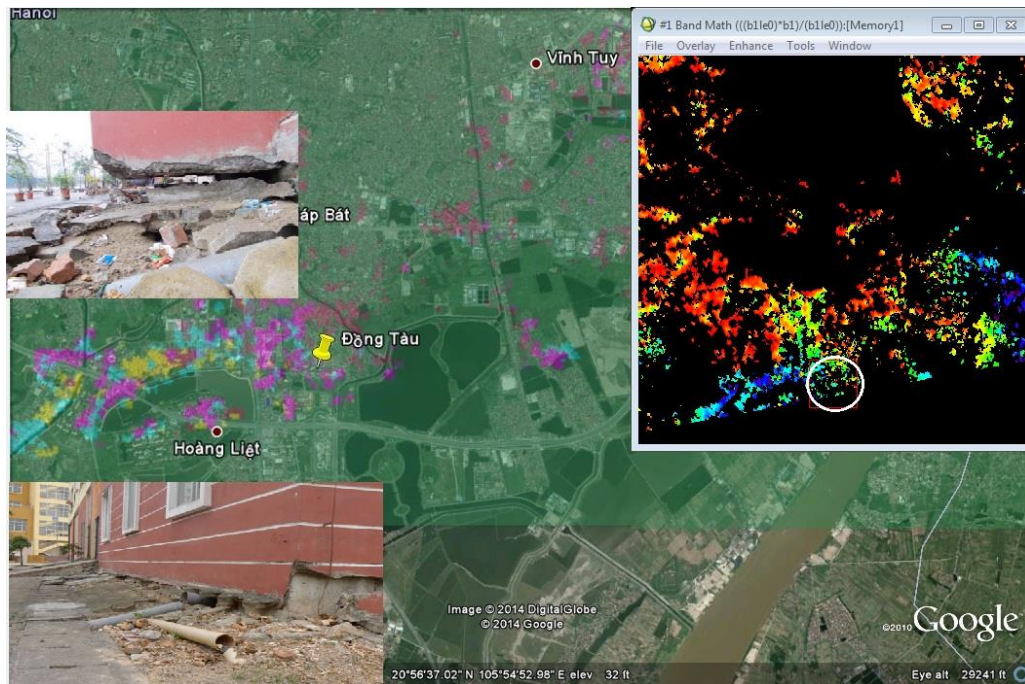


Fig. 5. Dong Tau subsidence 14mm in 2012-2013

In our experimental works, we compared our results to the result of Hanoi subsidence in the period of 2007- 2011 of our colleague Vu Khac Dang. We found that the location of subsidence of Hanoi region in 2012- 2013 is relatively similar to the prediction that Dang Vu Khac has given in his research.

The previous research in this area mainly used satellite images from ALOS PALSAR (Tran. V. A et al, 2007) and ENVISAT showed the advantages of InSAR in identifying the terrain surface deformation. The experimental results proved the use of X band to determine the terrain surface deformation.

X band with the wavelength from 2.4 - 3.8 cm in InSAR can show the detail of the terrain more accurately than those from the long-wavelength because they can be easily lost the correlation between the images. Thus it is necessary to select the relatively identical images on the conditions (atmospheric, time, ...)

#### 4. Conclusion

InSAR has brought about the important possibilities for determining changes in surface topography. Preliminary results obtained after being processed shows the possibility of using X band. However, the success of the technique depends on various factors such as SAR sensor, baseline, correlation, interpretation open phase problem... The article points out empirical result in the minor change of Hanoi terrain surface, eg subsidence (-41mm / year) of the Bac Thang Long industrial park area in the period of 2012 to 2013, the results are expected to contribute to the management bodies and social organizations.

#### References

- Ahrens, C. D., *Meteorology Today*, 5th ed., West Publ., Minneapolis/St.Paul, Minn., 1994
- Goldstein, R. M., H. Engelhardt, B. Kamb, and R. M. Frohlich, Satellite radar interferometry for monitoring ice sheet motion, Application to an Antarctic ice stream, *Science*, 262, 1525-1530, 1993
- Goldhirsh, J., and J.R. Rowland, A tutorial assessment of atmospheric height uncertainties for high-precision satellite altimeter mission to monitor ocean currents, *IEEE Trans, Geosci. Remote sens.*, GE-20(4), 418-433, 1982.
- Lee, J. S., Hoppel, K. W., Mango, S. A. and Miller, A. R. Intensity and phase statistics of multilook polarimetric and interferometric SAR imagery, *IEEE Transactions on Aerospace and Electronic System*, 32(5), pp. 1017-1028, 1994
- Tran. V. A, Shinji. M, Venkatesh. R and Kiyoji. S., Spatial Distribution of subsidence in Hanoi detected by JERS-1 SAR Interferometry. *Geoinformatics*, vol.18. no.1, pp 3-13, 2007
- Zebker, H.A., Rosen, P.A. and Hensley, S., Atmospheric effects in interferometric synthetic aperture radar surface deformation and topographic maps, *Journal of Geophysical Research*, 102(B4), pp.7547-7563, 1997
- Zebker, H. A., Rosen, P. A., Goldstein, R. M., Gabriel, A. and Werner, C. L. (1994) On the derivation of coseismic displacement fields using differential radar interferometry: The Landers earthquake, *Journal of Geophysical Research*, 99(B), pp.19617-1963