


Detector noise sensitivity: metrics over (σ_{res} , σ_{scatt}) grid at each T

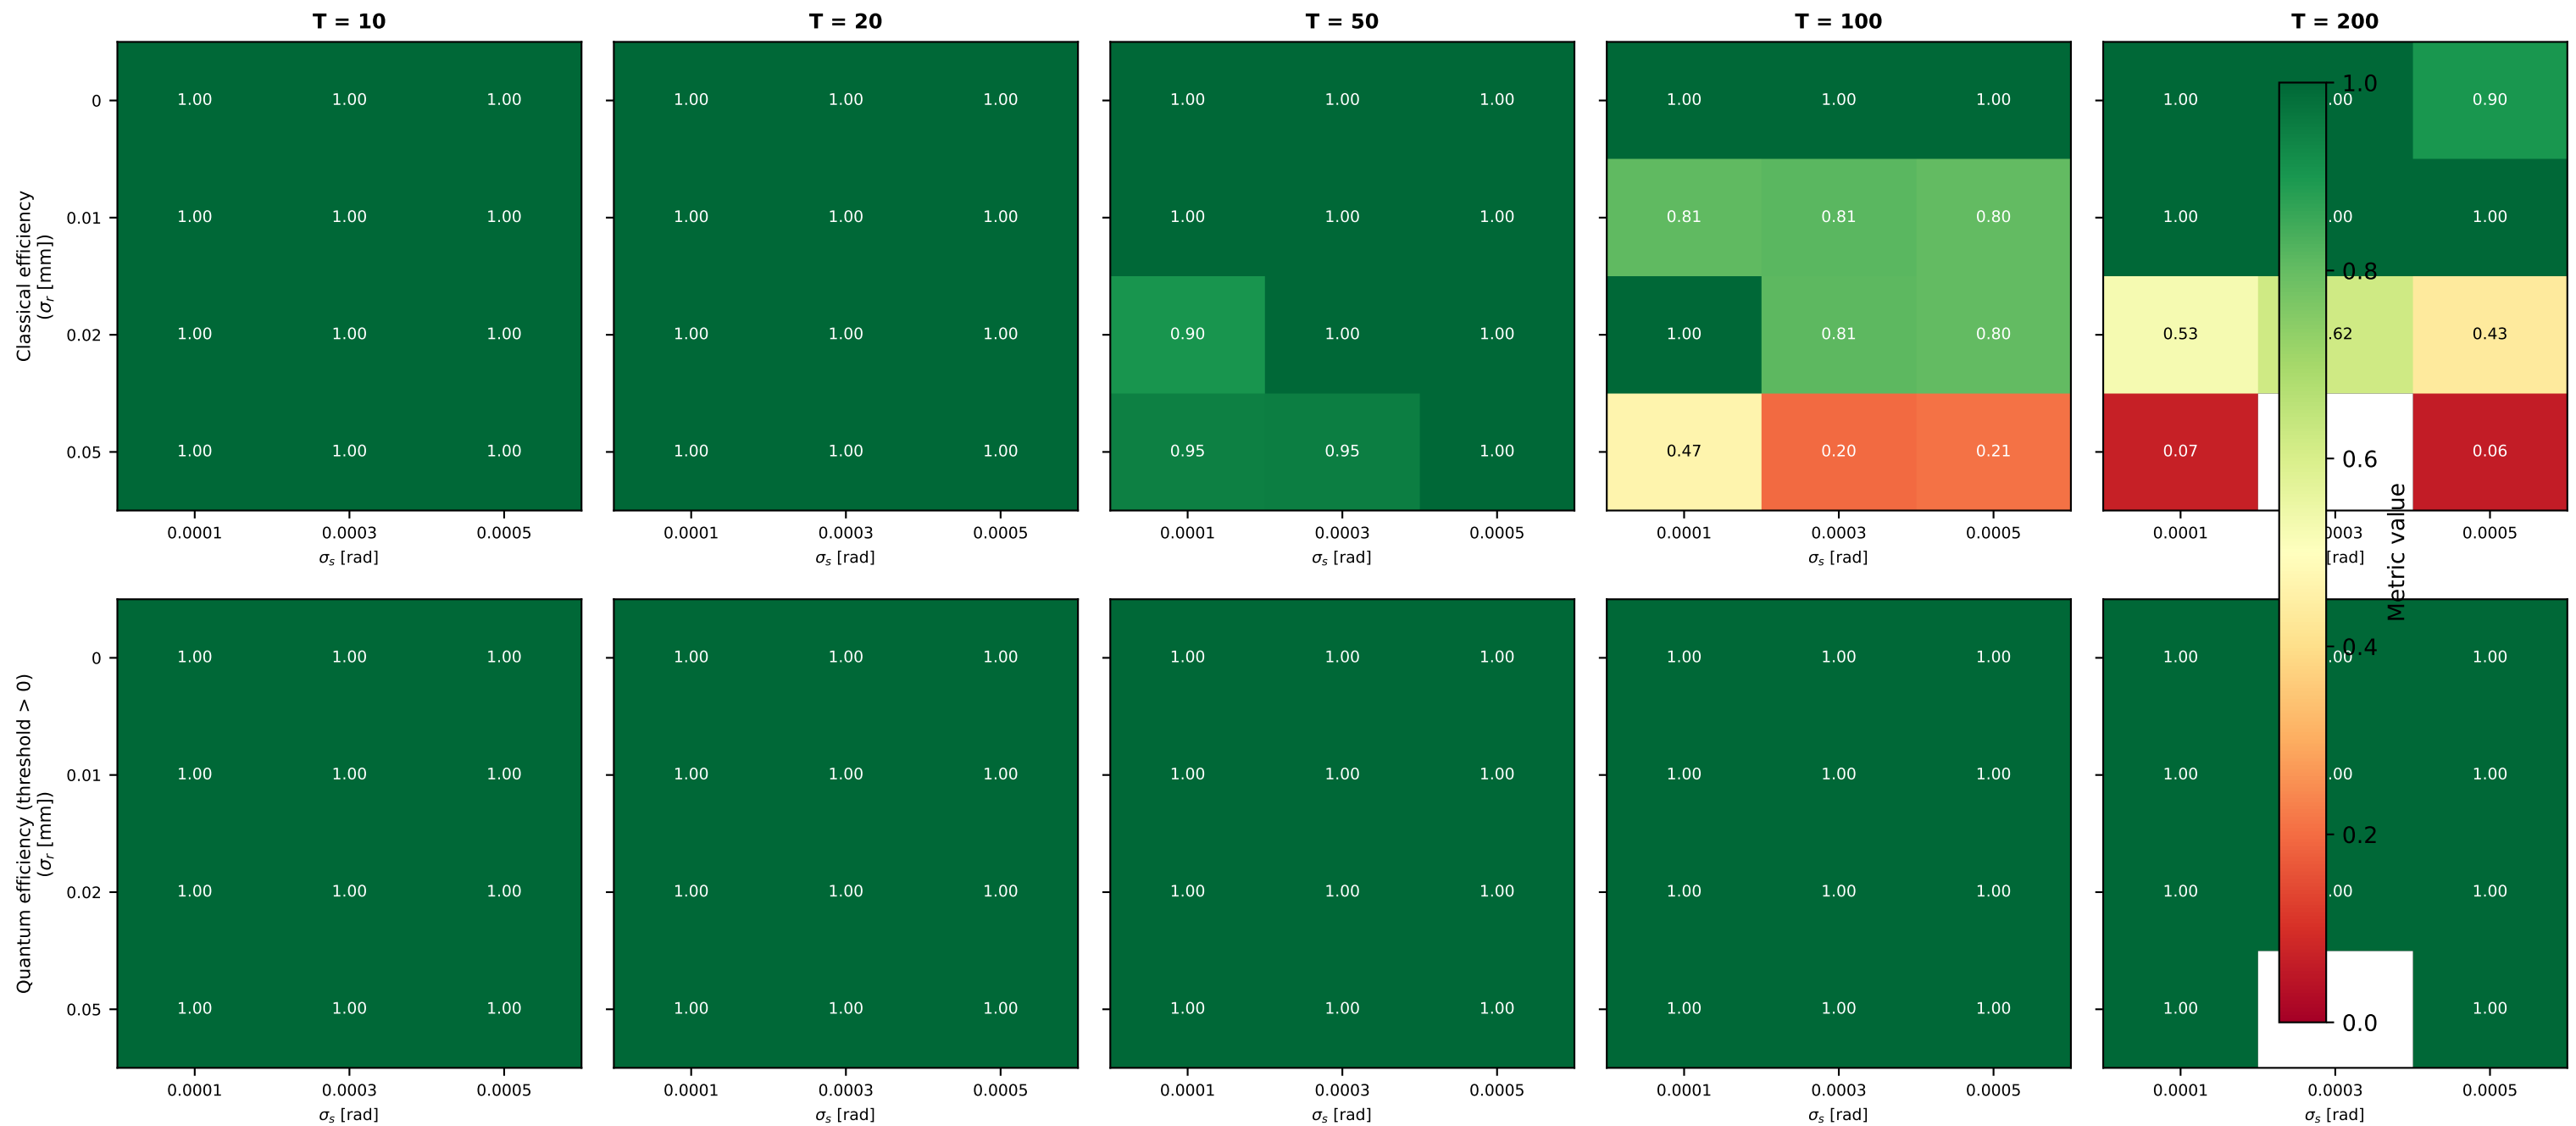

Controls: $\gamma=3$, $\delta=1$, $\phi_{\text{max}}=\theta_{\text{max}}=0.2$ rad, $\theta_{\text{min}}=1.5e-5$, $\tau=0.35$, $\epsilon=\text{calc.}(s=3)$, conv OFF, hit-ineff 0, 5 planes $\Delta z=33$ mm, statevector 1BQF

Fixed here: rows = σ_{res} , cols = σ_{scatt} , panels = T

Swept: σ_{res} , σ_{scatt} , T (full grid)