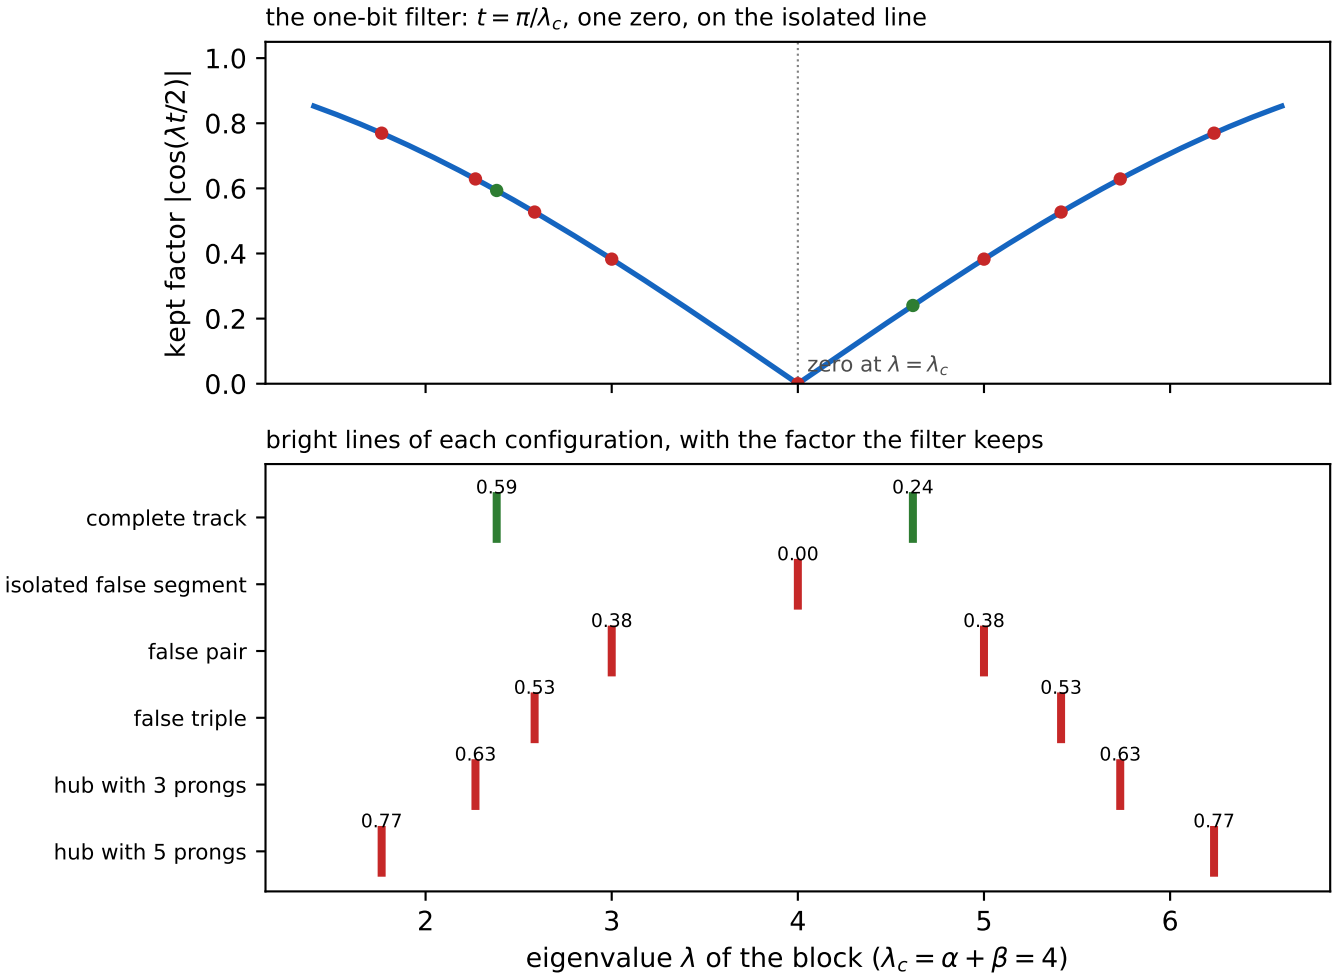
the one-bit filter: $t = \pi/\lambda_c$, one zero, on the isolated line
kept factor $|\cos(\lambda t/2)|$
1.0
0.8
0.6
0.4
0.2
0.0
zero at $\lambda = \lambda_c$
bright lines of each configuration, with the factor the filter keeps
complete track
isolated false segment
false pair
false triple
hub with 3 prongs
hub with 5 prongs
0.59
0.24
0.00
0.38
0.38
0.53
0.53
0.63
0.63
0.77
0.77
2
3
4
5
6
eigenvalue λ of the block ($\lambda_c = \alpha + \beta = 4$)