

**Title:**

Anti-Light-Variation, Detailed Camera-Based Tactile Sensing With Continuous Binary Encoding

**Authors:**

Jinnuo Zhang<sup>1</sup>, Jieji Ren<sup>1</sup>, Zhirui Zhang<sup>2</sup>, Yutong Pei<sup>1</sup>, Zhenle Liu<sup>1</sup>, Hao Shi<sup>1</sup>, Ningbin Zhang<sup>1</sup>, Boxin Shi<sup>2</sup>, *Senior Member, IEEE*, and Guoying Gu<sup>1</sup>, *Senior Member, IEEE*.

**Affiliations:**

<sup>1</sup> State Key Laboratory of Mechanical System and Vibration, School of Mechanical Engineering, Shanghai Jiao Tong University, Shanghai 200240, China; Shanghai Key Laboratory of Intelligent Robotics, Shanghai Jiao Tong University, Shanghai 200240, China

<sup>2</sup> State Key Laboratory of Multimedia Information Processing and National Engineering Research Center of Visual Technology, School of Computer Science, Peking University, Beijing 100871, China

Corresponding author: Guoying Gu (Email: [guguoying@sjtu.edu.cn](mailto:guguoying@sjtu.edu.cn))

## Content

|                                                                                                                                                                 |    |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|----|
| Supplementary Table.....                                                                                                                                        | 3  |
| Table S1. Analysis of changes in sensitivity metrics for FEM mesh size selection. ....                                                                          | 3  |
| Table S2. Analysis of changes in sensitivity metrics for fringe width selection.....                                                                            | 4  |
| Table S3. Simulation parameter settings.....                                                                                                                    | 5  |
| Table S4. Geometry reconstruction comparison for the fringe pattern under different sphere diameters<br>(simulation model vs. real-data fine-tuned model). .... | 6  |
| Table S5. Geometry reconstruction results under diverse internal lighting interference. ....                                                                    | 7  |
| Table S6. Force estimation robustness under different lighting conditions. ....                                                                                 | 8  |
| Table S7. Feature analysis of automated needle insertion. ....                                                                                                  | 9  |
| Supplementary Figure .....                                                                                                                                      | 10 |
| Fig. S1. Sensitivity analysis and evaluation for fringe width selection. ....                                                                                   | 10 |
| Fig. S2. Mechanical parameter calibration based on deformation pattern matching. ....                                                                           | 11 |
| Fig. S3. Matching robustness comparison under significant deformation. ....                                                                                     | 12 |
| Fig. S4. Architecture of the proposed UNet with Attention for depth map estimation.....                                                                         | 13 |
| Fig. S5. Geometry reconstruction of complex everyday objects using the grid pattern.. ....                                                                      | 14 |
| Fig. S6. Geometry reconstruction under diverse ambient lighting interference. ....                                                                              | 15 |
| Fig. S7. Internal illumination design of the sensor. ....                                                                                                       | 17 |
| Fig. S8. Geometry reconstruction under diverse internal lighting interference. ....                                                                             | 18 |
| Fig. S9. Force estimation performance using the grid pattern. ....                                                                                              | 19 |
| Fig. S10. The design of ambient lighting interference for force estimation. ....                                                                                | 20 |
| Fig. S11. Illumination robustness of force estimation. ....                                                                                                     | 21 |
| Fig. S12. Comparison of geometry reconstruction performance between pure simulation training and<br>real-data fine-tuning. ....                                 | 22 |
| Fig. S13. Object classification. ....                                                                                                                           | 23 |
| Fig. S14. Fluid property estimation.....                                                                                                                        | 24 |
| Fig. S15. Robustness analysis of peak detection algorithm for automated needle insertion.....                                                                   | 25 |
| Fig. S16. Open-loop grasping experiment for empty bottle.....                                                                                                   | 26 |
| Fig. S17. Relationship between geometry reconstruction accuracy and contact region. ....                                                                        | 27 |
| Fig. S18. Durability test of FringeTac. ....                                                                                                                    | 28 |
| Fig. S19. Qualitative comparison of different camera-based tactile encoding schemes. ....                                                                       | 29 |
| Supplementary Text .....                                                                                                                                        | 30 |
| Section S1. Parameter selection of fringe pattern .....                                                                                                         | 30 |
| Section S2. Sensitivity analysis of mesh size selection .....                                                                                                   | 33 |
| Section S3. Sensitivity analysis of fringe width selection .....                                                                                                | 35 |
| Section S4. Gel deformation simulation .....                                                                                                                    | 37 |
| Section S5. Mechanical parameter calibration.....                                                                                                               | 39 |
| Section S6. Network for geometry reconstruction.....                                                                                                            | 41 |
| Section S7. Illumination robustness of geometry reconstruction.....                                                                                             | 42 |
| Section S8. Illumination robustness of force estimation.....                                                                                                    | 43 |
| Section S9. Object classification.....                                                                                                                          | 44 |
| Section S10. Robustness analysis of peak detection algorithm in automated needle insertion .....                                                                | 45 |
| Section S11. Fluid property estimation.....                                                                                                                     | 46 |

## Supplementary Table

**Table S1. Analysis of changes in sensitivity metrics for FEM mesh size selection.**

| Mesh size $\Delta$ (mm)             | 0.111 | 0.122 | 0.135 | 0.149 | 0.165 | 0.183 | 0.202 | 0.223 | 0.247 | 0.273   |
|-------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|---------|
| Convergence error $\varepsilon$ (%) | 1.67  | -0.85 | -2.98 | -6.02 | 23.6  | 22.05 | 82.61 | 69.41 | 64.74 | 1544.63 |
| Efficiency $\eta$                   | 1.37  | 1.82  | 2.46  | 3.31  | 4.49  | 6.13  | 8.24  | 11.09 | 15.07 | 20.35   |

Note. Convergence error  $\varepsilon$  and relative computational efficiency  $\eta$  evaluated across 10 candidate finite element mesh sizes  $\Delta$ . The reference baseline mesh size is set to  $\Delta_0 = 0.100\text{mm}$ . Detailed discussion on convergence bounds is provided in **Section S2**.

**Table S2. Analysis of changes in sensitivity metrics for fringe width selection.**

| $R$ (%) | $W$ (mm) | $A(W)$ | $I(W)$ | $A'(W)$ | $I'(W)$ |
|---------|----------|--------|--------|---------|---------|
| 5       | 2.11     | 0.9500 | 0.0475 | 0.0233  | -0.0225 |
| 10      | 1.04     | 0.9000 | 0.0961 | 0.0945  | -0.0923 |
| 20      | 0.51     | 0.8000 | 0.1945 | 0.3824  | -0.3783 |

Note. Accuracy gain  $A(W)$ , tactile information gain  $I(W)$ , and their respective marginal derivatives  $A'(W)$  and  $I'(W)$  evaluated at candidate decay rates  $R \in \{5\%, 10\%, 20\%\}$ . The minimum resolvable fringe width is  $W_{\min} = 0.100\text{mm}$ . Detailed trade-off analysis is provided in **Section S3**.

**Table S3. Simulation parameter settings.**

| Type       | Parameter          | Explanation          | Value                 | Variation        |
|------------|--------------------|----------------------|-----------------------|------------------|
| Mechanical | $E$                | Young's modulus      | 120 kPa               | [80 kPa,160 kPa] |
|            | $\mu$              | Friction coefficient | 0.8                   | [0.6, 1.0]       |
|            | $\nu$              | Poisson's ratio      | 0.43                  | Fixed            |
|            | $\rho$             | Density              | 1.0 g/cm <sup>3</sup> | Fixed            |
| Simulation | $h_{\max}$         | Max pressing depth   | 2 mm                  | [1.5 mm, 2.5 mm] |
|            | $v_{\text{press}}$ | Pressing speed       | 25 mm/s               | Fixed            |
|            | $n_{\text{step}}$  | Simulation steps     | 9                     | Fixed            |

**Table S4. Geometry reconstruction comparison for the fringe pattern under different sphere diameters (simulation model vs. real-data fine-tuned model).**

| Sphere Diameter (mm) | Mean RMSE <sub>eff</sub> (mm) |                            |
|----------------------|-------------------------------|----------------------------|
|                      | simulation model              | real-data fine-tuned model |
| 5                    | 0.1198                        | 0.0386                     |
| 6                    | 0.2501                        | 0.0493                     |
| 9                    | 0.1647                        | 0.0750                     |
| 10                   | 0.2280                        | 0.1086                     |

**Table S5. Geometry reconstruction results under diverse internal lighting interference.**

| Internal Lighting condition |           | Mean RMSE <sub>eff</sub> (mm) |
|-----------------------------|-----------|-------------------------------|
| Color                       | Intensity |                               |
| Baseline                    |           | 0.085                         |
| Red                         | Weak      | 0.122                         |
| Red                         | Strong    | 0.120                         |
| Green                       | Weak      | 0.085                         |
| Green                       | Strong    | 0.087                         |
| Blue                        | Weak      | 0.125                         |
| Blue                        | Strong    | 0.121                         |
| RGB                         | Weak      | 0.086                         |
| RGB                         | Strong    | 0.082                         |
| Random                      | Random    | 0.128                         |

Note. Baseline is internal uniform white light.

**Table S6. Force estimation robustness under different lighting conditions.**

| Lighting condition |          |           | RMSE (N)    |             |             |
|--------------------|----------|-----------|-------------|-------------|-------------|
| Ambient            | Internal |           | $F_x$       | $F_y$       | $F_z$       |
|                    | Color    | Intensity |             |             |             |
| <b>Baseline</b>    |          |           | <b>0.04</b> | <b>0.07</b> | <b>0.27</b> |
| Fixed              | Fixed    |           | 0.05        | 0.10        | 0.23        |
| Dark               | Fixed    |           | 0.05        | 0.10        | 0.28        |
| Bright             | Fixed    |           | 0.04        | 0.08        | 0.39        |
| Dynamic            | Fixed    |           | 0.05        | 0.08        | 0.30        |
| Fixed              | Random   | Random    | 0.05        | 0.14        | 0.61        |


Note. Baseline is ambient condition is indoor natural light, and internal condition is uniform white light.



**Table S7. Feature analysis of automated needle insertion.**


| Experiments | Time (s) | Peak value (px) | Speed (px/s) |
|-------------|----------|-----------------|--------------|
| 1           | 3.6      | 5.3             | 1.47         |
| 2           | 2.6      | 6               | 2.31         |
| 3           | 3.1      | 5.8             | 1.87         |
| 4           | 2.7      | 4.6             | 1.70         |
| All         | 3.0±0.5  | 5.4±0.6         | 1.84±0.35    |

## Supplementary Figure

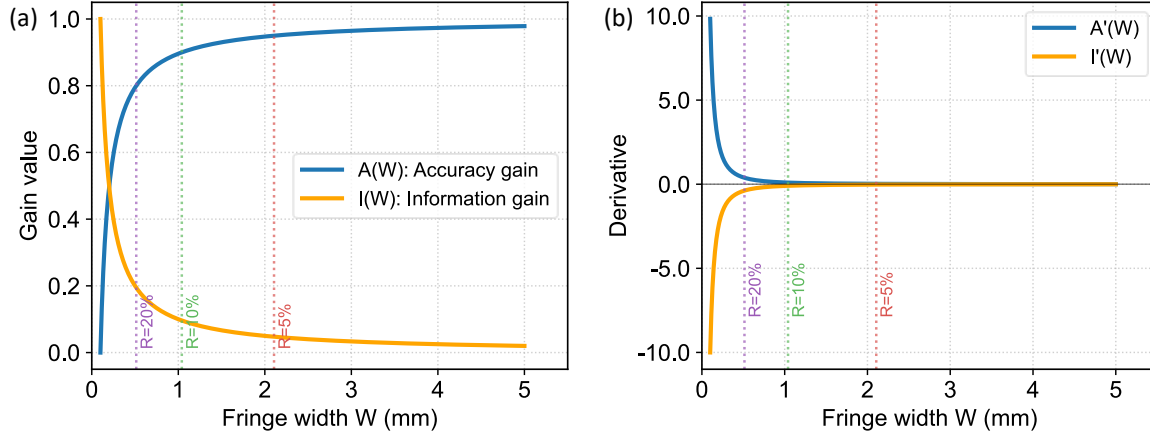


**Fig. S1. Sensitivity analysis and evaluation for fringe width selection.**

(a) Normalized accuracy gain  $A(W)$  and tactile information gain  $I(W)$  plotted against fringe width  $W$ . Vertical dotted lines denote candidate points corresponding to decay rates  $R = 20\%$  ( $W = 0.51\text{mm}$ ),  $R = 10\%$  ( $W = 1.04\text{mm}$ ), and  $R = 5\%$  ( $W = 2.11\text{mm}$ ). (b) Marginal derivatives  $A'(W)$  and  $I'(W)$ . The marginal benefit of accuracy has essentially approached zero when the decay rate  $R < 10\%$ .

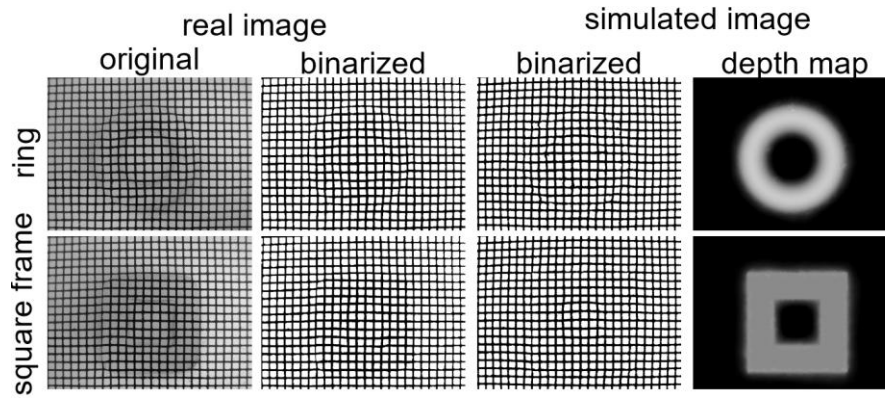


**Fig. S2. Mechanical parameter calibration based on deformation pattern matching.**

Pressing results comparison of two rigid indenters between physical indentation and simulations using optimized gel parameters. The high consistency between the real and simulated binary patterns under optimal parameters validates the fidelity of the calibrated simulation baseline.

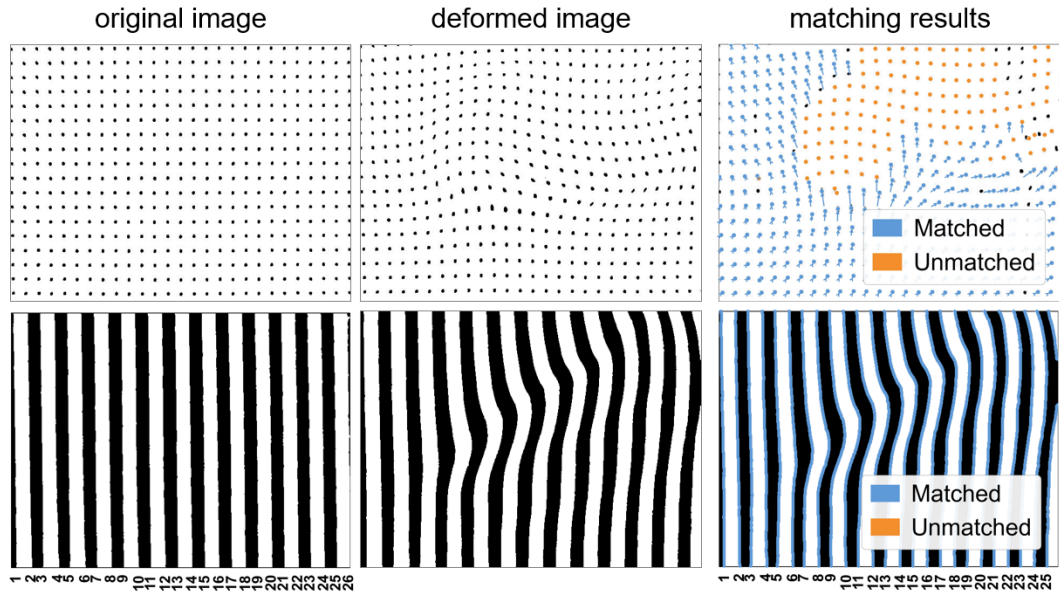


**Fig. S3. Matching robustness comparison under significant deformation.**

Top row shows optical flow tracking results on conventional discrete markers. Under large localized contact deformation, discrete markers suffer numerous severe mismatching and losses. Bottom row shows tracking results on the proposed continuous binary fringe pattern with the same spacing as the markers under equivalent large deformation condition. Since stripe patterns provide continuous features that are easier to recognize than marker points, 100% accuracy was maintained when tracking boundary lines. All 26 fringe boundaries successfully matched, shown in blue solid curves, demonstrating superior physical robustness under extreme deformation.

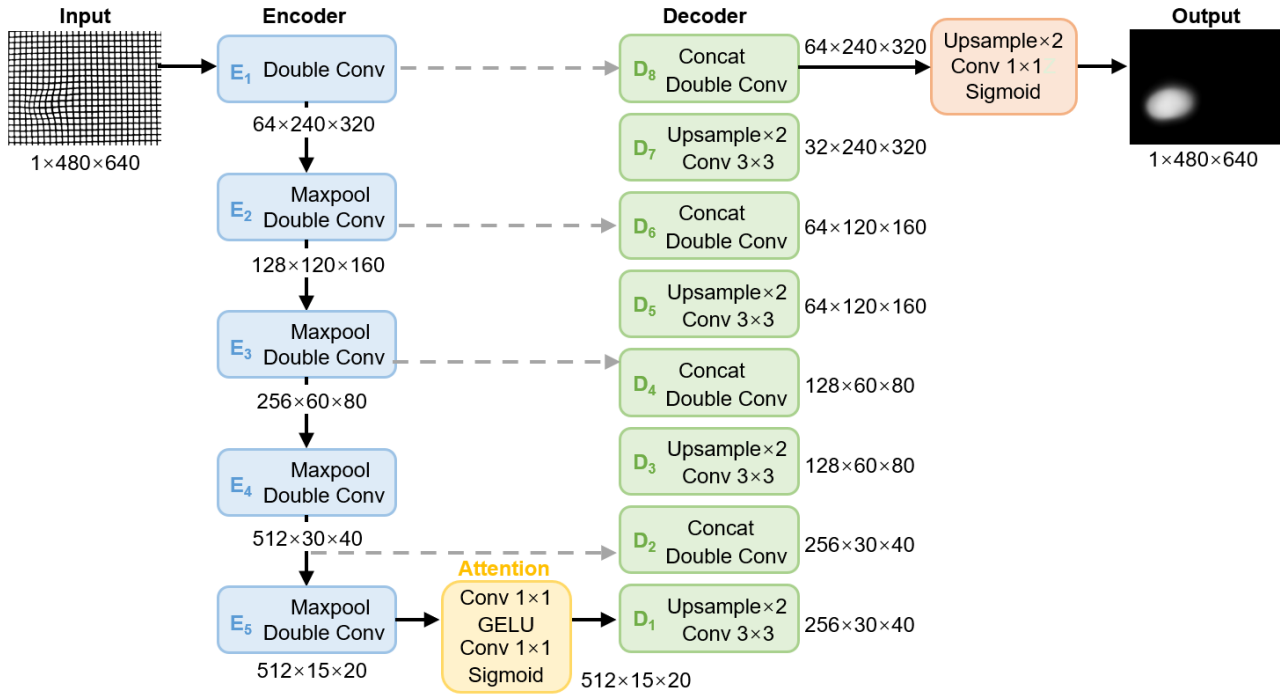


**Fig. S4. Architecture of the proposed UNet with Attention for depth map estimation.**

The network takes a binary image ( $1 \times 480 \times 640$ ) as input and predicts the corresponding depth map ( $1 \times 480 \times 640$ ). For encoder subnetwork, the initial block  $E_1$  downsamples the input to  $64 \times 240 \times 320$ , matching the feature dimensions required by the subsequent residual-like downsampling blocks  $E_2 - E_5$ . For channel attention module positioned at the deepest bottleneck layer, features are first compressed via a  $1 \times 1$  convolution with GELU activation, and subsequently re-expanded using the Sigmoid activation to compute channel-wise attention weights. For decoder subnetwork and output layer, feature maps are progressively upsampled and concatenated with their corresponding encoder features via skip connections. The final representation from  $D_8$  ( $64 \times 240 \times 320$ ) is bilinearly upsampled in the output layer before being mapped through a  $1 \times 1$  convolution and a Sigmoid activation to output the target depth map.

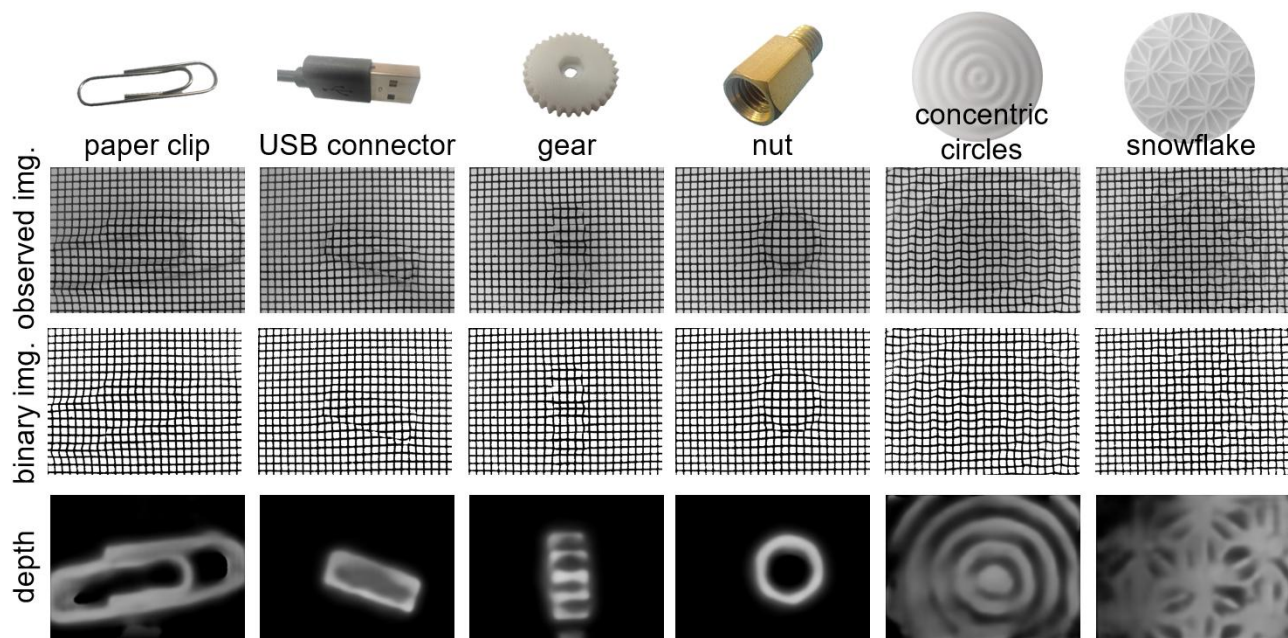

**Fig. S5. Geometry reconstruction of complex everyday objects using the grid pattern.**

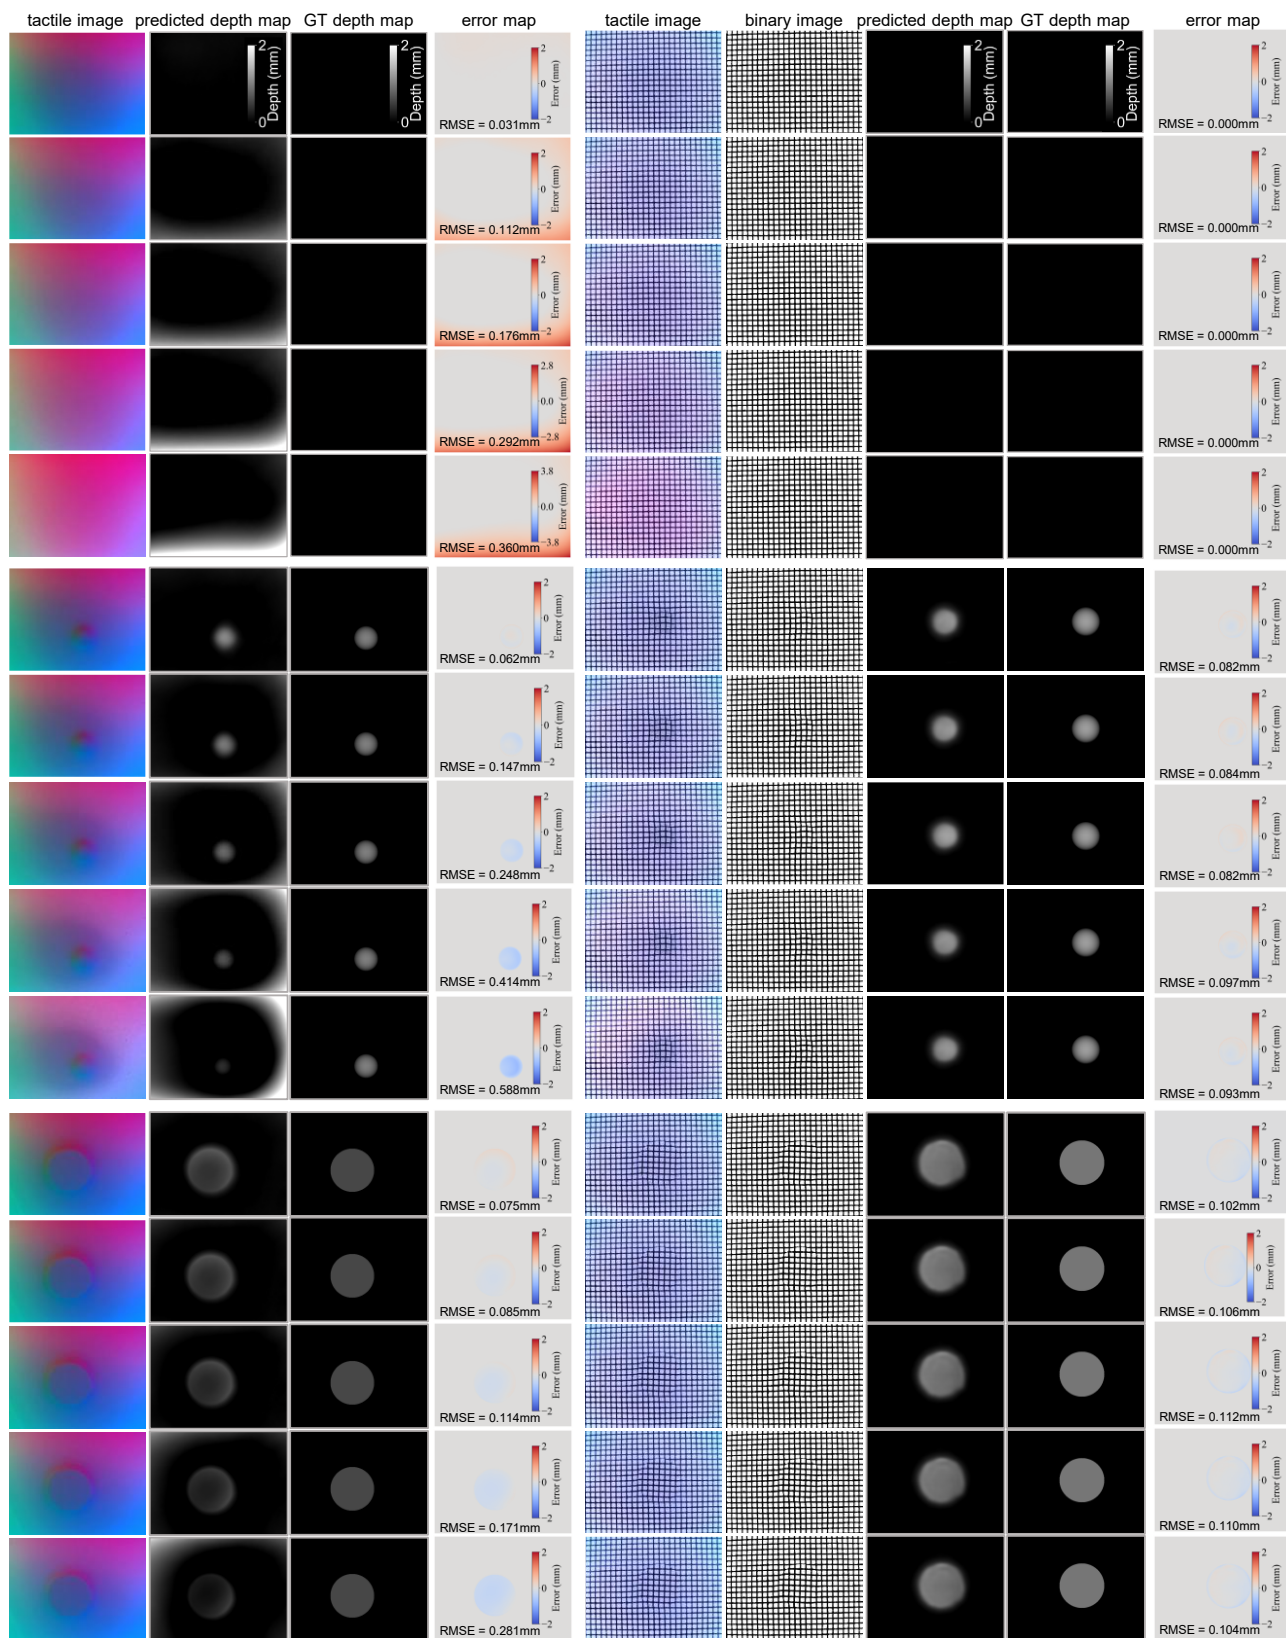


**Fig. S6. Geometry reconstruction under diverse ambient lighting interference.**

Geometry reconstruction comparison between PS method (left) and grid-pattern-based continuous binary encoding method (right) under different ambient illumination disturbances


(red, white, and blue lights across interference levels 0-4). Each block displays partial results for three contact states from top to bottom: unpressed state (red light interference), spherical indenter (white light interference), and cylindrical indenter (blue light interference).



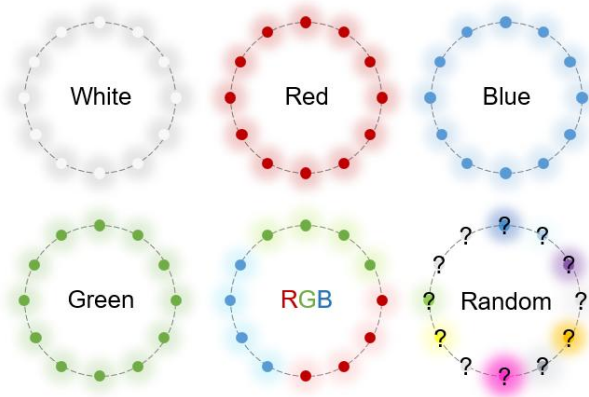


**Fig. S7. Internal illumination design of the sensor.**

6 illumination conditions were designed for the internal lighting. In addition to the initial white-light illumination, five interference conditions were designed. Specifically, RGB refers to evenly dividing the internal LEDs into three groups to provide red, green, and blue illumination, respectively. Random illumination means that the color and intensity of each LED vary randomly. For the first four interference conditions, two illumination intensities, weak and strong were further considered.

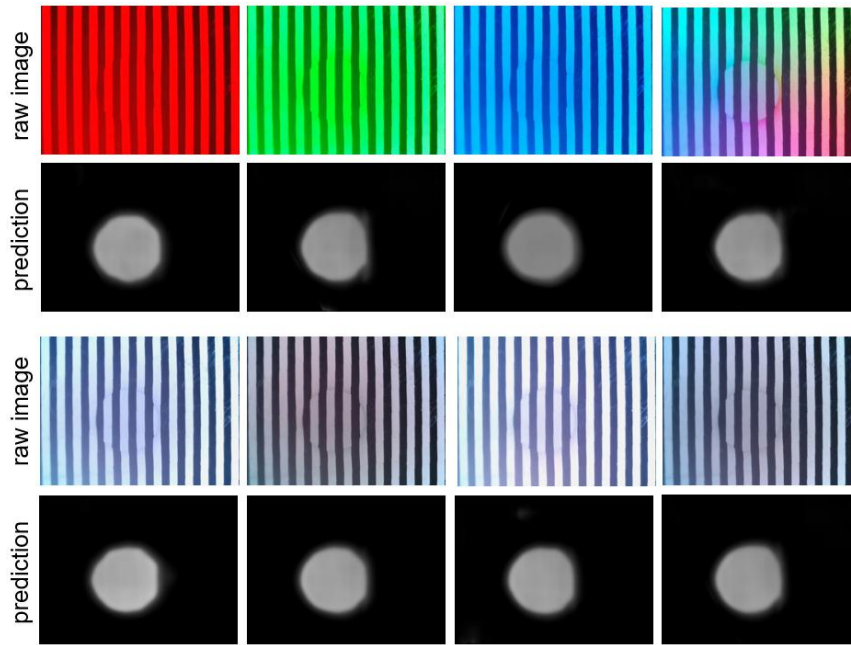


**Fig. S8. Geometry reconstruction under diverse internal lighting interference.**

Under a constant indentation state, the top row shows observed images and corresponding images under internal light condition of strong red, blue, green and RGB. The bottom row shows results under random internal light condition (random intensities for each RGB channel of each LED). Geometry reconstruction performs robust across all tested environments.

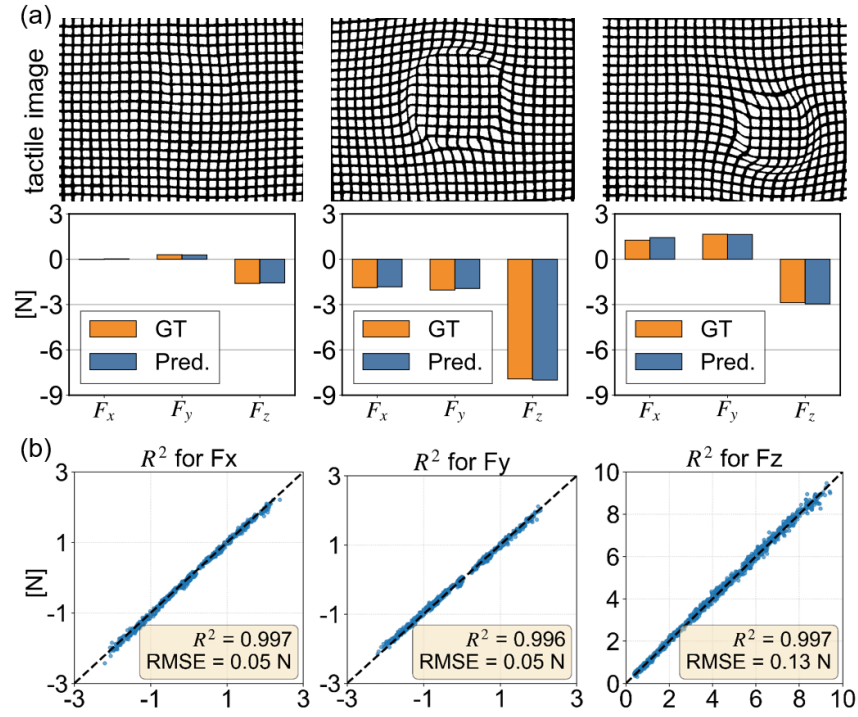


**Fig. S9. Force estimation performance using the grid pattern.**

(a) Representative tactile images with corresponding ground truth and predicted force vectors  $F_x, F_y, F_z$ . (b) Regression analysis ( $R^2$  plots and RMSE metrics). Utilizing identical data collection and neural network architecture to the fringe pattern, the 2D grid structure demonstrates great spatial isotropy with balanced tangential accuracy (RMSE = 0.05 N) for both  $F_x$  and  $F_y$ , while significantly improving normal force estimation accuracy ( $F_z$  RMSE reduced from 0.27 N to 0.13 N).

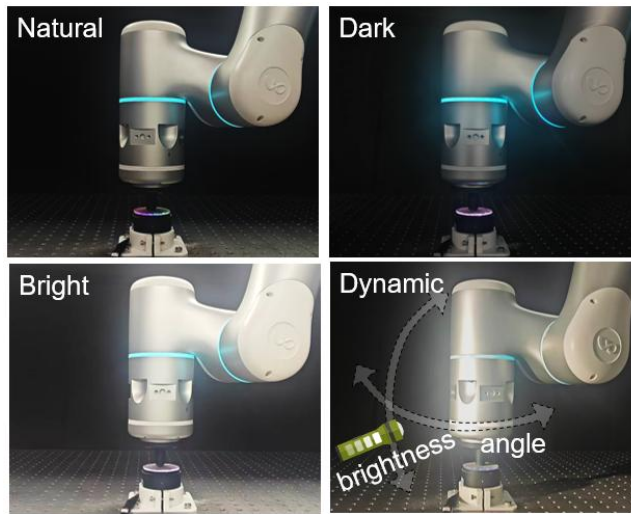


**Fig. S10. The design of ambient lighting interference for force estimation.**

Ambient lighting variations include four representative conditions: indoor natural light, darkness (lights off at night), bright illumination with additional light sources, and dynamically varying illumination. The dynamic ambient illumination is generated using a handheld flashlight with four discrete intensity levels, while both the intensity and the incident direction are continuously changed.

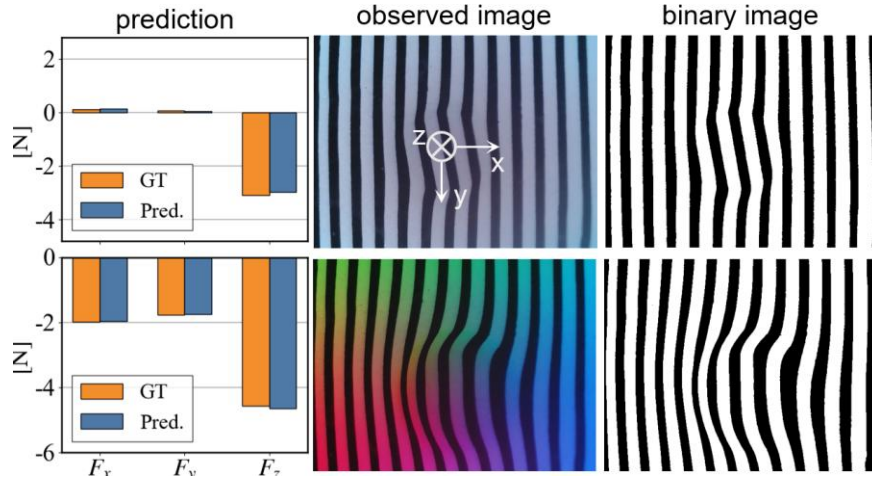


**Fig. S11. Illumination robustness of force estimation.**

According to the leftmost image, it can be seen that the network's prediction of  $F_x$ ,  $F_y$ , and  $F_z$  is very close to the ground truth value when the lighting conditions randomly change, achieving robust force estimation.

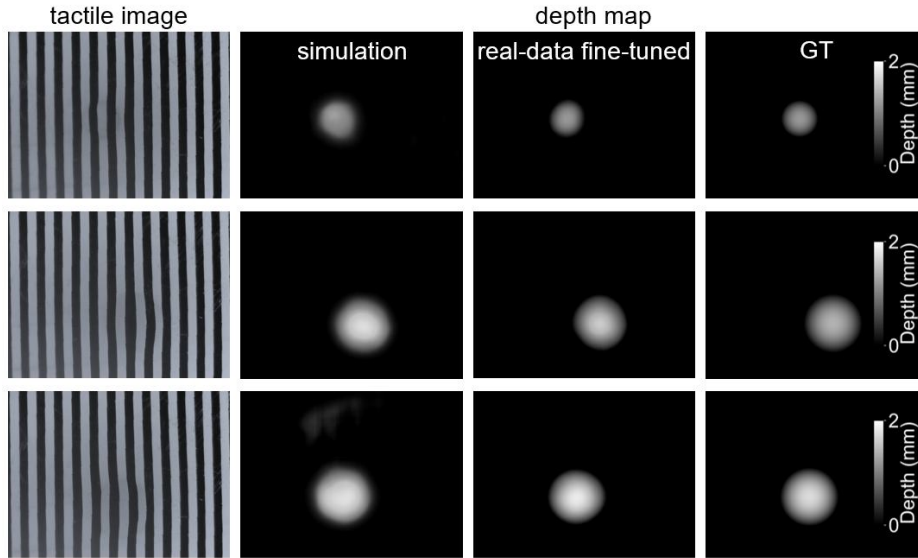


**Fig. S12. Comparison of geometry reconstruction performance between pure simulation training and real-data fine-tuning.**

Taking the fringe pattern as an example, each row displays from left to right: the input tactile image during contact with spherical objects of varying diameters, the depth map predicted by the network trained purely on simulation data, the depth map predicted by the network fine-tuned with a small dataset of real-world samples, and the corresponding ground truth depth map. Real data fine-tuning can effectively improve the reconstruction performance and make the predicted depth map closer to the ground truth value. This proves its effectiveness in narrowing the sim-to-real gap.

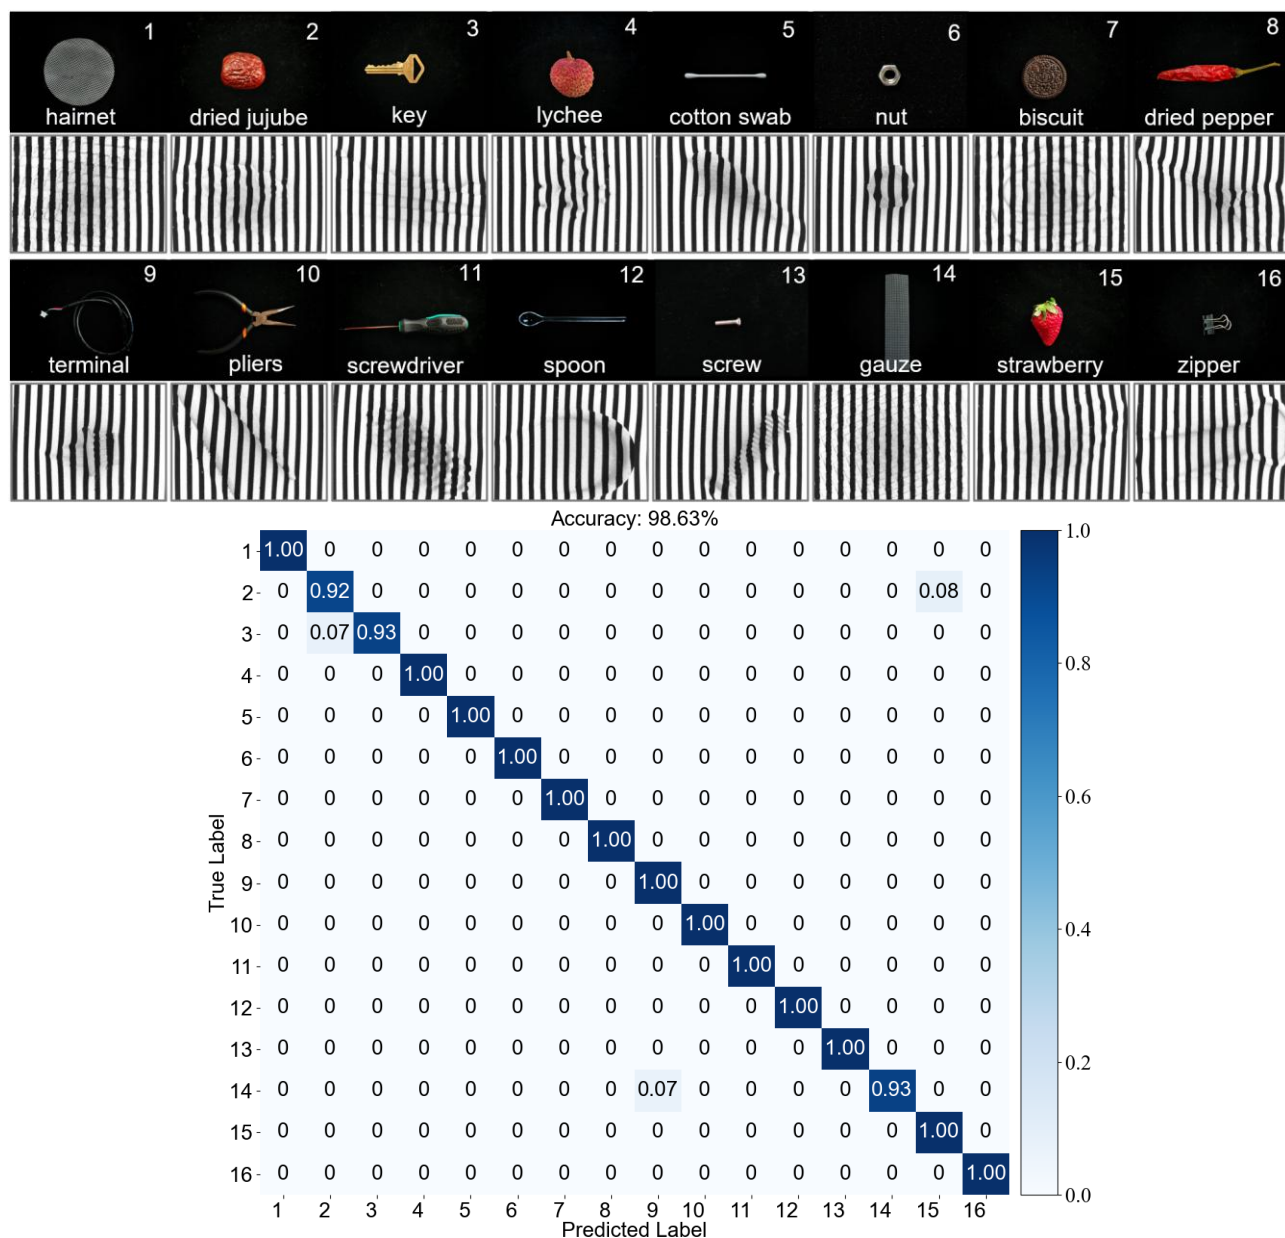

**Fig. S13. Object classification.**


The confusion matrix of 16 objects shows an overall accuracy of 98.63%, indicating robust performance in recognizing diverse contact features.

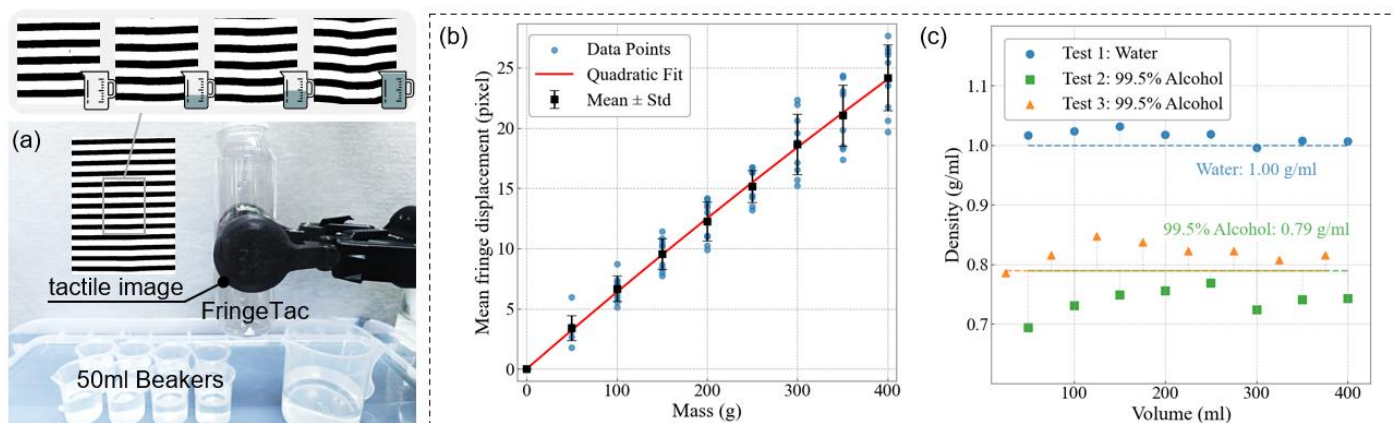

**Fig. S14. Fluid property estimation.**

(a) Water was incrementally added to the bottle to establish the relationship between mean fringe displacement and liquid mass. (b) The fitted model exhibits a near-linear correlation. (c) Based on this model, static density estimation was performed, while dynamic mass monitoring during continuous pouring is shown in Video S2.



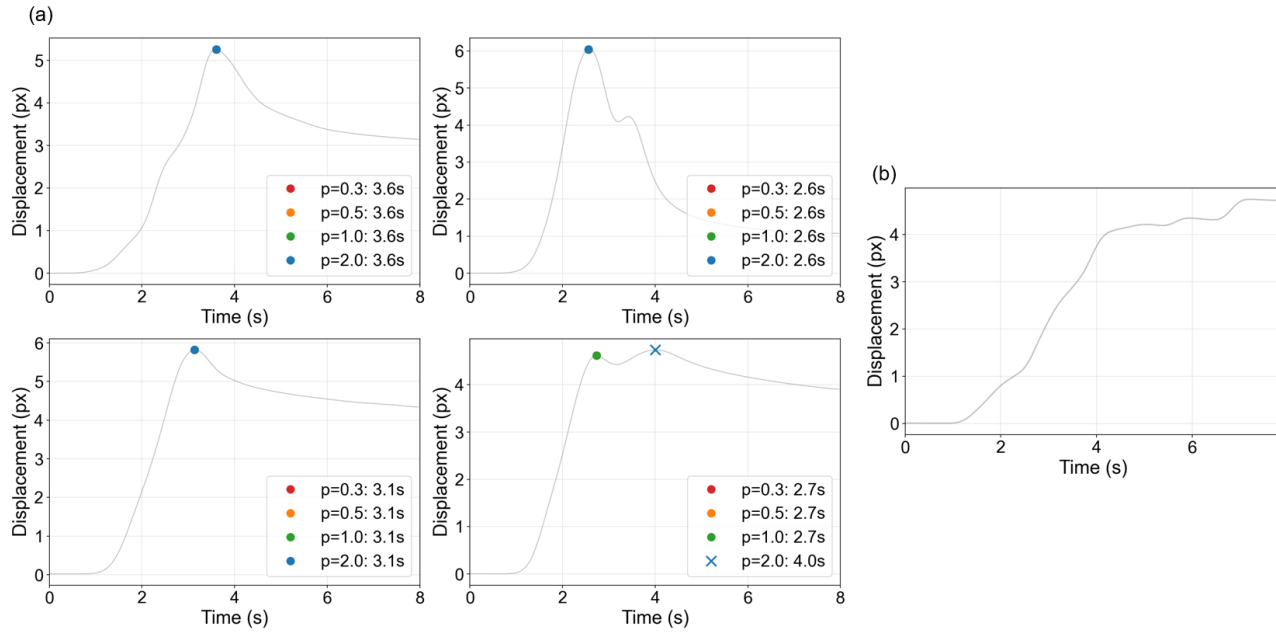


**Fig. S15. Robustness analysis of peak detection algorithm for automated needle insertion.**

(a) To evaluate the robustness of the initially selected threshold, we varied it by scaling factors of  $p = 0.3, 0.5$ , and  $2.0$ , and re-detected the puncture peaks accordingly. Identical peak times detected under different thresholds confirm algorithm stability. A misidentification occurs only in Trial 4 at an excessively lenient threshold ( $p = 2.0$ ). (b) A trial of failure. The syringe slipped while being held, preventing successful insertion into the vessel. Consequently, the algorithm failed to detect the puncture peak.




**Fig. S16. Open-loop grasping experiment for empty bottle.**

Without tactile feedback, the gripper is unable to modulate its closure force through pose adjustment. Nevertheless, owing to the low weight of the empty bottle, the initial grasping force is adequate for successful grasping in open-loop trials.

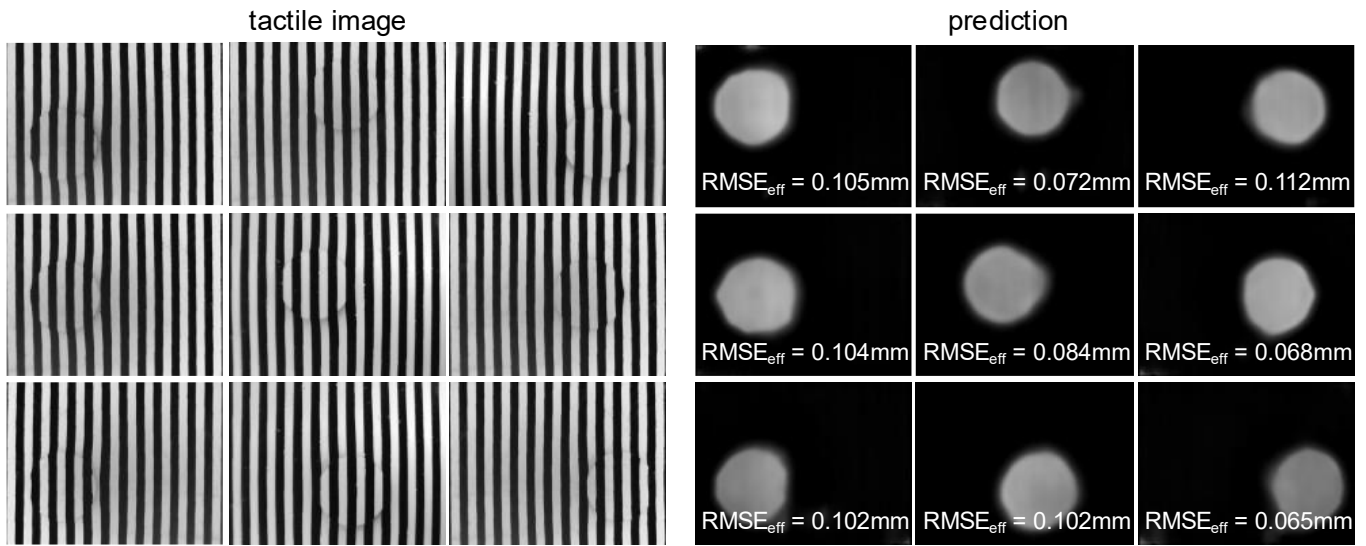


**Fig. S17. Relationship between geometry reconstruction accuracy and contact region.**

A cylindrical indenter was pressed to the same depth at various positions across the sensing area. Tactile images and the corresponding reconstructed depth maps were obtained, and the RMSE was computed against the ground truth. The results exhibit minor fluctuations in RMSE across different contact locations, all of which remain within a controllable range.

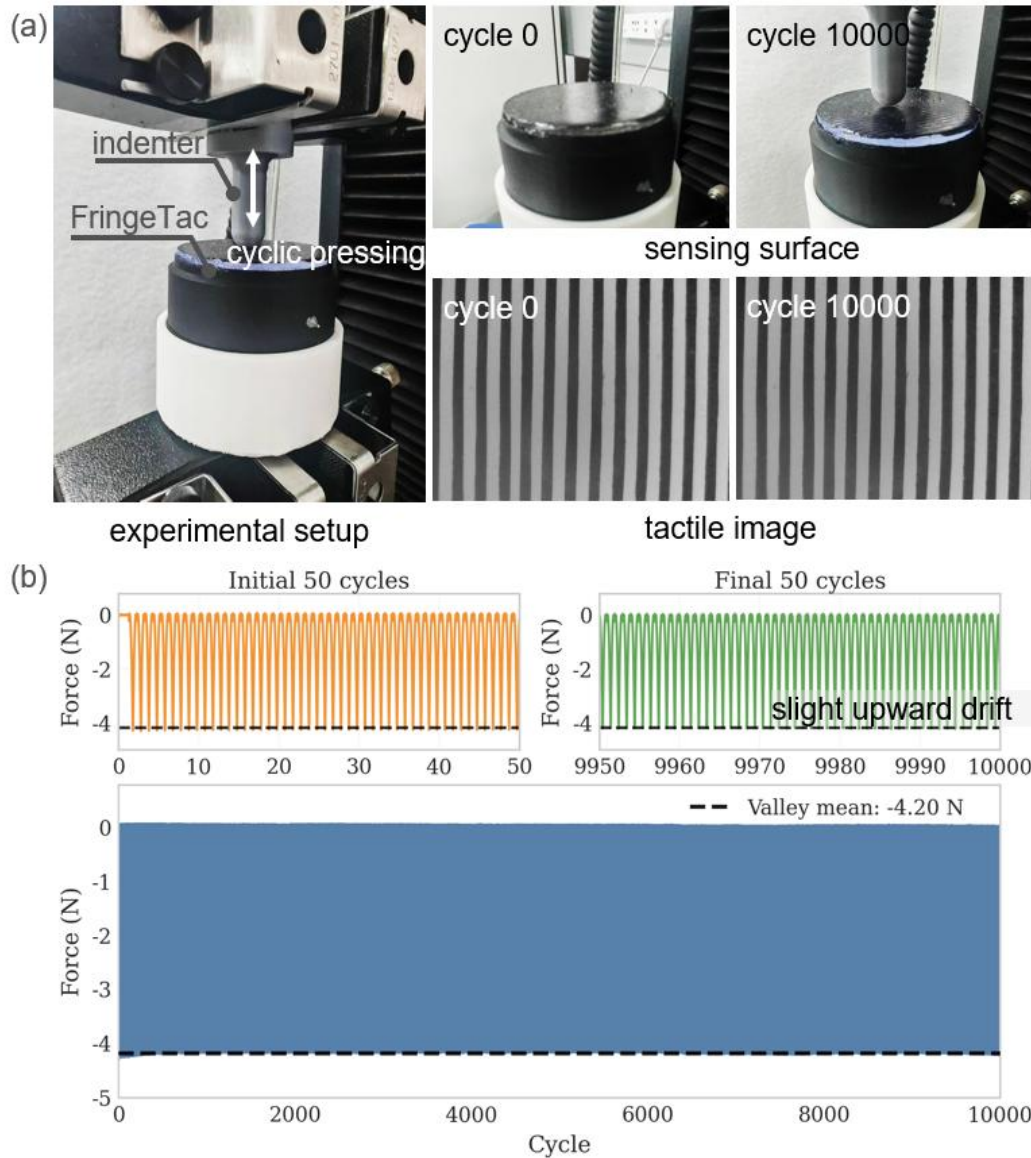

**Fig. S18. Durability test of FringeTac.**

A spherical indenter was pressed against the sensor surface to a fixed depth, performing a series of loading-unloading cycles. Over 10,000 consecutive cycles, the force-displacement response remained highly consistent, exhibiting only a slight upward drift. No visible plastic deformation or delamination of the elastomer gel is observed, and the binary fringe pattern shows no signs of degradation or fading. This robust structural resilience implies satisfactory long-term reliability for repeated, high-frequency robotic manipulation tasks.

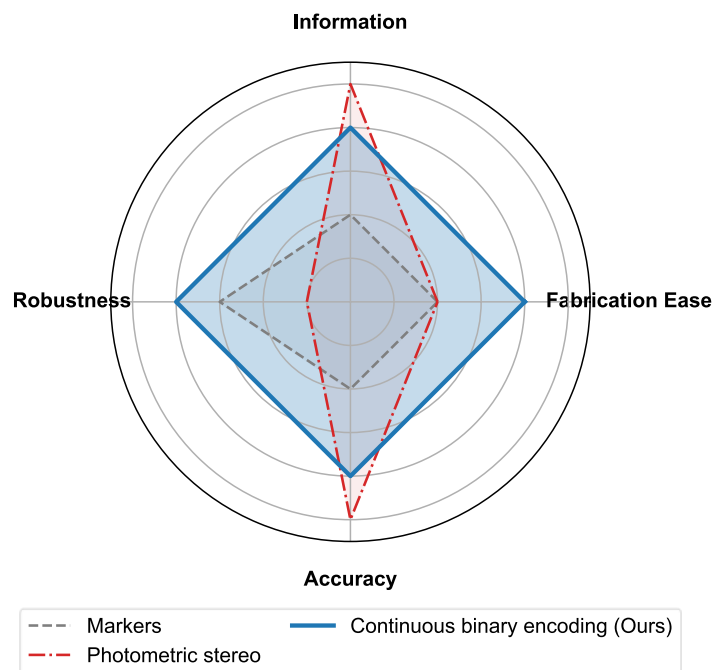

**Fig. S19. Qualitative comparison of different camera-based tactile encoding schemes.**

Performance is evaluated across four core dimensions: Fabrication Ease, Information, Robustness, and Accuracy. Compared with traditional discrete markers and photometric stereo, the proposed continuous binary encoding achieves a well-balanced tradeoff, delivering high robustness and accuracy with sufficient tactile information.

## Supplementary Text

### Section S1. Parameter selection of fringe pattern

Since the geometry reconstruction network is trained entirely on simulated data, the fringe parameters must be compatible with the spatial resolution of the finite element mesh. In practice, both the simulation mesh size and the fringe width jointly determine how faithfully fringe deformation can be represented. As a result, parameter selection is carried out in two stages. We first identify a mesh resolution. The fringe width is then selected under this fixed resolution based on the shape representation error we defined.

As expected, dense meshes yield higher geometric accuracy, but at a substantial computational cost. Coarser meshes, on the other hand, significantly reduce runtime while introducing noticeable discretization errors. To quantify this trade-off, mesh sizes  $\Delta$  ranging from 0.1mm to 5mm are evaluated, uniformly sampled in logarithmic space, as shown in **Fig. 3(e)** (only [0.1mm, 3mm] is shown in the figure).

Depth maps generated using the finest mesh are treated as reference, and the mean absolute error (MAE) of reconstructions obtained with coarser meshes is computed accordingly. For each mesh size, three independent simulations are performed and averaged to suppress stochastic variation.

We take the natural error (MAE) fluctuation between the two densest grid resolutions as the reference accuracy level. Mesh sizes whose MAE stays within  $\pm 10\%$  of this reference are regarded as acceptable, as they provide comparable reconstruction quality with substantially reduced computational burden. Following this criterion, the largest acceptable mesh size is selected as  $\Delta^* = 0.149\text{mm}$ .

With the mesh size fixed at  $\Delta^*$ , the fringe width  $W$  becomes the dominant factor controlling encoding fidelity. Finer fringes provide denser tactile information, but when the fringe scale approaches the mesh scale, the triangular elements can no longer accurately approximate the deformation of fringe boundaries, resulting in amplified shape distortion. **Fig. 3(d)** shows the

shape error approximating fringe boundaries with discretized meshes. To isolate the effect of fringe width, we fixed the duty space  $D=0.5$ .

For a fringe of width  $W$ , let  $A_i$  denote the area of the  $i$ -th triangular element that intersects the fringe region. The total mesh area required to fully cover the fringe is then given by  $A_{\text{sum}} = \sum_i A_i$ , where the summation includes all triangular elements whose support overlaps with the fringe. Due to mesh discretization, this accumulated area is generally larger than the ideal fringe area  $W \times 1$ .

Based on this observation, we define the relative fringe shape representation error as

$$E_{\text{shape}} = \frac{A_{\text{sum}} - W}{W}, \quad (\text{S1})$$

which directly measures the relative area discrepancy between the mesh-based approximation and the ideal fringe geometry. Intuitively, this quantity reflects how efficiently the mesh can represent a fringe of a given width. For consistency, all evaluations are conducted on fringe segments of fixed unit length, so that the ideal fringe area is  $W \times 1$ . This normalization eliminates the influence of fringe length and allows the analysis to focus exclusively on how fringe width affects geometric representability.

We evaluate  $W$  in the range from 0.1mm to 5mm, again sampled uniformly in logarithmic space, as shown in **Fig. 3(f)** (only [0.1mm,3mm] is shown in the figure). It is worth noting that  $E_{\text{shape}}$  is inherently a function of  $W$ . To mitigate position-dependent discretization bias, three fringe segments placed at different spatial locations are evaluated for each fringe width, and the resulting  $E_{\text{shape}}$  are averaged. Repeating this procedure for all tested widths yields a relationship  $E(W)$  between  $W$  and  $E_{\text{shape}}$

$$E(W) = 0.167W^{-0.983} + 0.152. \quad (\text{S2})$$

We further examine how rapidly the shape error decays as the fringe width increases. A normalized relative decay rate is introduced,

$$R(W) = \frac{E(W) - E_{\infty}}{E(W_{\min}) - E_{\infty}} = \left( \frac{W}{W_{\min}} \right)^{-0.983}. \quad (\text{S3})$$

This function satisfies  $R(W) \in (0,1]$ , decreases monotonically with  $W$  and quantifies the proportion of remaining reducible error relative to the smallest fringe width. As with the acceptable range of 10% taken for mesh size optimization, the fringe width corresponding to  $R(W) = 10\%$  is also selected, resulting in  $W = 1.04\text{mm}$ .

Finally, given the minimum resolvable fringe width, equal widths for black and white fringes maximize effective tactile information under a fixed spatial frequency. The duty space is therefore set to  $D = 0.5$ .



## Section S2. Sensitivity analysis of mesh size selection

We conducted a mesh convergence study to determine the optimal finite element mesh size. We define the computational efficiency metric  $\eta$  and the relative convergence error  $\varepsilon$  as follows:

$$\eta = \left( \frac{\Delta}{\Delta_0} \right)^3, \quad \varepsilon = \frac{E - E_0}{E_0} \times 100\% \quad (\text{S4})$$

$\Delta$  is the target mesh size,  $\Delta_0 = 0.100\text{mm}$  represents the reference fine-mesh baseline. Since the computational time in 3D finite element analysis scales roughly with the cube of the mesh density, we define computational efficiency  $\eta$  as the factor by which the computation time at the current mesh size  $\Delta$  is reduced compared to that of the finest mesh  $\Delta_0$ .

$E$  is the MAE evaluated at the current mesh size  $\Delta$ , and  $E_0$  is the error computed on the finest mesh  $\Delta_0$ . The relative convergence error  $\varepsilon$  is defined as the percentage difference from the finest-mesh error. A candidate mesh size is considered converged once  $\varepsilon$  consistently settles within a specified threshold bound.

To thoroughly evaluate the sensitivity of convergence to different candidate threshold bounds (e.g.,  $\varepsilon = 5\%$ ,  $10\%$ ,  $20\%$ ), we list the corresponding metrics for the 10 adjacent mesh sizes in the range of  $0.111\text{mm}$  to  $0.273\text{mm}$ , where convergence is approached. The corresponding convergence errors  $\varepsilon$  and computational efficiencies  $\eta$  are summarized in **Table S1**.

As shown in **Table S1**, when the mesh size exceeds  $0.165\text{mm}$ , the convergence error sharply spikes above  $20\%$ , indicating clear non-convergence due to under-sampling of localized deformations. Conversely, when the mesh size is reduced below  $0.149\text{mm}$ , the error rapidly drops and remains bounded within a narrow range.

Evaluating the choice of convergence threshold yields the following insights:

Under a stricter  $5\%$  threshold, the candidate mesh size is  $\Delta = 0.135\text{mm}$  (efficiency  $\eta = 2.46$ ).

Under a slightly relaxed threshold of  $10\%$ , the candidate mesh size increases to  $\Delta = 0.149\text{mm}$  (efficiency  $\eta = 3.31$ ).

Overall, both 0.135mm and 0.149mm represent viable choices depending on the chosen threshold. In our implementation, 0.149mm was adopted based on two practical considerations. First, its convergence error ( $\varepsilon = -6.02\%$ ) lies very close to the 5% threshold boundary while providing a noticeable 34.5% enhancement in computational efficiency ( $\eta = 3.31$  vs. 2.46). Second, as the mesh size decreases past 0.149mm, the error transitions from large positive values into a regime of minor positive and negative oscillations around 0.149mm ( $\varepsilon = -6.02\%$ ). Therefore, we infer that the mesh enters the stable asymptotic convergence range starting at 0.149 mm.

### Section S3. Sensitivity analysis of fringe width selection

Selecting the optimal fringe width  $W$  involves a fundamental trade-off between accuracy and tactile information density. On one hand, increasing the fringe width improves spatial sampling per fringe, reducing shape representation error. On the other hand, a smaller fringe width allows a higher number of fringes within the camera's field of view (FOV), thereby maximizing the total effective tactile information captured.

In **Section S1**, we derived a fitting function  $E(W)$  relating the shape representation error to the fringe width:

$$E(W) = 0.167W^{-0.983} + 0.152 \quad (\text{S5})$$

We also defined a normalized relative decay rate  $R(W)$  to describe the proportion of residual error relative to that at the minimum resolvable fringe width  $W_{\min} = 0.100\text{mm}$ :

$$R(W) = \frac{E(W) - E_{\infty}}{E(W_{\min}) - E_{\infty}} = \left( \frac{W}{W_{\min}} \right)^{-0.983} \quad (\text{S6})$$

To select an appropriate  $R$  threshold for width selection, we should conduct a sensitivity analysis. We define two normalized, monotonic gain metrics bounded in  $[0,1]$ :

$$A(W) = 1 - R(W) \quad (\text{S7})$$

$$I(W) = \frac{W_{\min}}{W} \quad (\text{S8})$$

where accuracy gain  $A(W)$  quantifies the achieved reconstruction accuracy improvement and information gain  $I(W)$  represents the amount of effective information contained in the pattern within the fixed FOV.  $I(W)$  is directly proportional to fringe density or in other words, inversely proportional to fringe width  $W$ .

To evaluate the sensitivity of threshold selection, we analyzed the performance metrics  $A(W)$ ,  $I(W)$ , and their corresponding marginal derivatives  $A'(W)$  and  $I'(W)$  across candidate decay rates  $R \in \{5\%, 10\%, 20\%\}$ , as detailed in **Table S2** and **Fig. S1**.

As illustrated in **Fig. S1**, increasing  $W$  continuously decreases the information gain ( $I'(W) < 0$  universally) and increases the accuracy gain  $A(W)$ . However, the accuracy gain  $A(W)$  exhibits diminishing marginal returns as  $W$  increases.

At  $R = 20\%$  ( $W = 0.51\text{mm}$ ), the information gain  $I(W) = 0.1945$ , the derivative of the precision gain is  $A'(W) = 0.3824$ , indicating that significant marginal gains still exist.

At  $R = 10\%$  ( $W = 1.04\text{mm}$ ), the derivative  $A'(W)$  drops to 0.095. The marginal benefit of further increasing the fringe width is no longer significant.

At  $R = 5\%$  ( $W = 2.11\text{mm}$ ), accuracy gain reaches 95%, but at a severe cost to spatial pattern density ( $I(W)$  drops to 0.0475). Furthermore, the derivative  $A'(W)$  drops to 0.0233, confirming that further widening the fringes yields negligible accuracy improvements.

Therefore,  $W = 1.04\text{mm}$  ( $R = 10\%$ ) was finally selected as the optimal fringe width. Furthermore, comparing this fringe width to the optimal FEM element size ( $\Delta = 0.149\text{mm}$ ), the ratio  $W/\Delta \approx 7$  is close to an order of magnitude. This spatial resolution is basically sufficient to characterize complex fringe deformations.

## Section S4. Gel deformation simulation

To simulate realistic gel deformation during contact, we adopt the TacIPC simulator as the framework backbone. This simulator integrates a finite element method (FEM) with Incremental Potential Contact (IPC), allowing stable and accurate modeling of hyperelastic gel materials under complex contact conditions.

As shown in **Fig. 4(b)**, the gel is discretized into a tetrahedral mesh. The gel deformation at each time step is computed by minimizing the total energy of the system.

Specifically, the updated vertex positions  $x^{t+\Delta t}$  are obtained by minimizing the physically motivated energy:

$$\begin{aligned}
 x^{t+\Delta t} &= \arg \min_x \mathcal{E}_{\text{mech}} + \mathcal{E}_{\text{cont}} + \mathcal{E}_{\text{fric}} \\
 \mathcal{E}_{\text{mech}}(x, x^t, \mathbf{v}^t) &= \frac{1}{2} \|x - x^{\text{pred}}\|_{\mathbf{M}}^2 + \Delta t^2 \mathcal{W}(x) \\
 \mathcal{E}_{\text{cont}}(x) &= \sum_{i \in \mathcal{P}} \eta \varphi(d_i(x)) \\
 \mathcal{E}_{\text{fric}}(x, x^t) &= \sum_{i \in \mathcal{P}} \mu \cdot \lambda_i \cdot \psi(\|\mathbf{u}_i\|).
 \end{aligned} \tag{S9}$$

Here, the mechanical energy  $\mathcal{E}_{\text{mech}}$  encodes the inertial and elastic dynamics, the contact barrier energy  $\mathcal{E}_{\text{cont}}$  ensures non-penetration between gel and objects, and the frictional energy  $\mathcal{E}_{\text{fric}}$  models the tangential friction resistance during surface contact.

Specifically, in  $\mathcal{E}_{\text{mech}}$ ,  $\mathbf{M}$  is the mass matrix,  $\Delta t$  is the time step size, and  $\mathcal{W}(x)$  represents the internal strain energy derived from a hyperelastic material model, such as Neo-Hookean, parameterized by Young's modulus  $E$  and Poisson's ratio  $\nu$ . The predicted position  $x^{\text{pred}}$  accounts for external force  $f_{\text{ext}}$  and the velocity  $\mathbf{v}^t$ :  $x^{\text{pred}} = x^t + \Delta t \mathbf{v}^t + \Delta t^2 \mathbf{M}^{-1} f_{\text{ext}}$ .

$\mathcal{E}_{\text{cont}}$  discourages the proximity of node-triangle or edge-edge beyond a specified distance threshold, where  $\mathcal{P}$  is the set of active proximity pairs,  $d_i(x)$  is the signed distance between surfaces in pair  $i$ ,  $\eta$  is the penalty scaling factor, and  $\varphi(\cdot)$  is a smooth logarithmic barrier function that diverges as  $d_i \rightarrow 0$ .

$\mathcal{E}_{\text{fric}}$  penalizes relative tangential sliding, where  $\mu$  is the friction coefficient,  $\mathbf{u}_i$  denotes relative tangential motion at contact  $i$ ,  $\psi(\cdot)$  is a smooth regularization function (e.g. pseudo-Huber) and  $\lambda_i$  is an approximation of the magnitude of normal force, often calculated as  $\lambda_i = \eta \|\nabla \phi(d_i)\|$ .

To align simulated gel behavior with the real sensor, we first preliminarily determined the mechanical parameters of silicone gel in the real world. Subsequently, we further calibrated and refined mechanical parameters by comparing simulated deformed patterns with real tactile images. Ring-shaped and hollow square objects are pressed against the real gel surface to induce distinctive deformation features. The same contact configurations are replicated in simulation under identical max pressing depth  $h_{\text{max}}$ , pressing speed  $v_{\text{press}}$ , and simulation steps  $n_{\text{steps}}$ .

By varying Young's modulus  $E$ , friction coefficient  $\mu$ , density  $\rho$ , and Poisson's ratio  $\nu$ , we generate multiple simulated deformation states. Undeformed binary patterns are then mapped onto the simulated meshes to obtain deformed patterns, which are compared against real images using image similarity metrics. The final calibrated parameters are  $E = 120\text{kPa}$ ,  $\mu = 0.8$ ,  $\nu = 0.43$ ,  $\rho = 1.0\text{g/cm}^3$ .

Since ink wear and material aging mainly affect surface friction and stiffness,  $E$  and  $\mu$  are allowed to vary within a specified range during data generation, while  $\nu$  and  $\rho$  are kept fixed. The simulation parameters are summarized in **Table S3**. For each pressing trial, mesh states from steps 5 to 9 are exported, representing different indentation depths. In total, 1205 pressing simulations are conducted over 33 objects, resulting in 6025 deformed gel meshes.

## Section S5. Mechanical parameter calibration

To ensure high simulation fidelity, the material and contact interaction parameters of the elastomeric gel substrate were calibrated through physical indentation calibration. The density and Poisson's ratio of the silicone gel were fixed at experience values:  $\rho = 1.0 \text{g/cm}^3$  and Poisson's ratio  $\nu = 0.43$ . The Young's modulus  $E$  and the friction coefficient  $f$  between the gel surface and indenters were identified via grid-search optimization.

Physical calibration was performed using a sensor coated with 2D grid pattern, as it provides high spatial tactile information across both orthogonal axes. Two custom 3D-printed rigid indenters (ring, square frame) were selected as the calibration objects. Both feature a closed-loop structure with an internal cavity and each combines planar features with curved boundaries, thereby providing a richer set of morphological characteristics.

Both indenters were modeled in CAD and placed under identical indentation conditions (identical contact locations and indentation depths) in both physical experiments and finite element simulations.

A total of  $9 \times 15 = 135$  parameter combinations were evaluated across a two-dimensional search space:

$E$ :  $[0.04 \text{MPa}, 0.20 \text{MPa}]$  with a step size of  $0.02 \text{MPa}$  (9 candidates).

$f$ :  $[0.1, 1.5]$  with a step size of  $0.1$  (15 candidates).

Evaluating these parameter sets across 2 calibration indenters yielded a total of 270 simulated image deformation cases.

For each simulation case, the surface mesh displacement field was mapped to synthesize the corresponding deformed grid image. Both real physical images and simulated images were preprocessed via thresholding to extract binary grid patterns.

The image matching error was evaluated using the Mean Absolute Error (MAE) of normalized pixel intensities ( $I \in [0, 1]$ ):

$$\text{MAE} = \frac{1}{N} \sum_{i=1}^N |I_{\text{sim}}(i) - I_{\text{real}}(i)| \quad (\text{S10})$$

where  $N$  is the total pixel count within the sensor ROI. The image similarity score  $S$  is defined as the optimization fitting objective:

$$S = 1 - \text{MAE} \quad (\text{S11})$$

where  $S = 1$  indicates identical binary pattern alignment and  $S = 0$  indicates complete mismatch.

By maximizing the joint average similarity score across both indenters, the optimal material and contact parameters were identified as:

$$E^* = 0.12 \text{MPa}, \quad f^* = 0.8, \quad \nu = 0.43, \quad \rho = 1.0 \text{g/cm}^3$$

Under these optimal parameters, the residual mismatch and similarity performance were:

Square frame: Similarity score  $S = 0.7781$  (MAE = 0.2219).

Ring: Similarity score  $S = 0.6743$  (MAE = 0.3257).

There are many possible reasons for the residual mismatch, like manufacturing tolerances (layer lines) of the 3D-printed indenter and minor numerical instabilities arising from a very small number of distorted mesh elements during computation. Therefore, after completing the initial calibration of mechanical parameters, we fine-tuned the network by incorporating a small amount of real data into the synthetic simulation dataset; this step aimed to reduce the gap between simulation and reality and optimize the reconstruction results.



## Section S6. Network for geometry reconstruction

To achieve geometry reconstruction, we designed a network that maps binarized images of FringeTac to depth maps. The network adopts a U-Net architecture. The network configuration is shown in **Fig. S4**. The input is a binarized image of size  $640 \times 480 \times 1$ , and the output is a single-channel depth map of identical resolution.

The training objective is to minimize a hybrid loss function that jointly considers global geometric accuracy and local edge preservation. The total loss is defined as:

$$\mathcal{L}_{\text{total}} = \mathcal{L}_{\text{MSE}} + \lambda \mathcal{L}_{\text{edge}} \quad (\text{S12})$$

Here,  $\lambda = 0.05$  is a weighting coefficient, and  $H = 480$ ,  $W = 640$  are the height and width of the image, respectively. The first term  $\mathcal{L}_{\text{MSE}}$  represents the pixel-wise mean squared error between the predicted depth map  $\hat{Y}$  and ground truth.

$$\mathcal{L}_{\text{MSE}}(\hat{Y}, Y) = \frac{1}{HW} \sum_{i=1}^H \sum_{j=1}^W (\hat{Y}_{ij} - Y_{ij})^2 \quad (\text{S13})$$

The second term  $\mathcal{L}_{\text{edge}}$  is an edge-aware loss activated after 100 epochs, aiming to enhance depth discontinuities. It is computed as the absolute difference between the gradient magnitudes of the predicted and ground truth depth maps.

$$\mathcal{L}_{\text{edge}}(\hat{Y}, Y) = \frac{1}{HW} \sum_{i=1}^H \sum_{j=1}^W |G(\hat{Y})_{ij} - G(Y)_{ij}| \quad (\text{S14})$$

## Section S7. Illumination robustness of geometry reconstruction

Partial reconstruction results are provided in **Fig. S6** to further illustrate how ambient light affects the spatial distribution of errors across the sensor surface.

For the photometric stereo (PS) method, monochromatic light (red, green, or blue) mainly interferes with the corresponding R, G and B channel of captured images. Because the internal LED illuminates the sensor surface from three directions spaced 120 degrees apart, the interference effect is most pronounced in the diagonal area farthest from its illumination source, resulting in a gradual decrease in reconstruction error from the periphery towards the center.

In contrast, the grid-pattern-based continuous binary encoding method processes binarized deformation features rather than raw multi-channel intensities. Consequently, its spatial error distribution remains uniform and largely invariant to external lighting changes across all contact states and interference levels.

To systematically evaluate illumination robustness, in addition to ambient light interference, we designed different internal illumination interference conditions (**Fig. S7**). Because PS is inherently modeled on constant internal RGB intensity relationships, the model no longer holds when internal illumination changes. Therefore, we only tested binary patterns, using the fringe pattern as an example (**Fig. S8**). We pressed a cylindrical indenter into the fixed sensor to a constant depth while capturing images under various illumination combinations (**Table S5**). We calculated the RMSE between the predicted depth map and the ground truth depth map. Across all tested illumination categories, the RMSE fluctuation range was small, indicating that the binarized patterns successfully preserve critical geometric information.

Overall, the continuous binary encoding scheme exhibits excellent overall illumination robustness.

## Section S8. Illumination robustness of force estimation

Similarly to the case of geometry reconstruction, we evaluate the robustness of force estimation on the test dataset for different ambient (**Fig. S10**) and internal (**Fig. S7**) lighting interference conditions. The results are shown in **Table S6**. The standard dataset is collected under fixed ambient and internal illumination (indoor natural light and uniform white LEDs) for network training, while additional datasets under varied illumination are used to assess robustness without retraining. The RMSE of  $F_x$  exhibited high stability in all conditions tested. When only the ambient illumination varied while the internal lighting remained fixed, the estimation errors for all force components changed slightly. When the internal illumination changes dynamically and randomly, the increase in errors is relatively large but remains within a controllable margin.

## Section S9. Object classification

To evaluate the tactile perception capability of FringeTac, we performed an object perception task using 16 commonly encountered items. These objects represent three general categories: food, household items, and tools. Each object was assigned a numerical label from 1 to 16, as shown in **Fig. S13**. To assess the discriminative capacity of the model, we selected several objects with similar surface textures, such as a hairnet and gauze (both mesh-like), strawberry, lychee, and dried jujube (all featuring irregular bumpy surfaces).

For each object, 120 tactile images were collected by pressing the item onto the FringeTac surface, resulting in a total of 1920 samples. Among them, 90% were used for training and 10% for testing. A ResNet-18 model is employed as the classifier, with its input and output dimensions adapted for this task. The model was trained in an end-to-end manner and achieved a classification accuracy of 98.63% on the test set, indicating robust and accurate performance in recognizing diverse contact features.

Among the misclassified samples, the network identified three instances. dried jujubes were predicted as strawberries; keys were predicted as dried jujubes; and gauzes were predicted as terminal connectors. The confusion between the dried jujube and the strawberry is because that they share similar irregular surface profiles, leading to comparable deformed patterns.

The latter two errors are more likely attributable to variations in contact pose and partial occlusion during image acquisition. Since the tactile image only captures the region within the camera's field of view, if a distinctive feature (such as serrated edge of a key) is not fully captured, the model may rely on secondary features that resemble those of another object (such as the uneven surface of a dried jujube). Similarly, when only a small region of the gauze is pressed, its sparse mesh pattern may resemble the localized texture of a terminal connector.

## Section S10. Robustness analysis of peak detection algorithm in automated needle insertion

During the experiment, the sensor calculates the average fringe displacement  $\Delta\bar{p}$  from the captured images and applies real-time filtering to suppress noise. Since  $\Delta\bar{p}$  qualitatively reflects the magnitude of the resistive force, a notable drop in  $\Delta\bar{p}$  occurs when the needle tip penetrates the first vessel wall. The system identifies this event by monitoring the displacement drop  $\Delta\bar{p}_{\text{drop}}$  following a local maximum. Once  $\Delta\bar{p}_{\text{drop}}$  exceeds a preset threshold, the penetration is detected and the insertion is halted. The characteristics of the data curve variations for all trials are summarized in **Table S7**.

The threshold was determined empirically from open-loop experiments. It must be set sufficiently high to avoid false triggers due to minor signal fluctuations, yet low enough to prevent missed detections. To evaluate its robustness, we applied scaling factors  $p = 0.3, 0.5, 2.0$  to the original threshold and re-evaluated all trials, as shown in **Fig. S15(a)**. The detected penetration peaks remained consistent across nearly all trials. The only exception occurred in trial 4, where the excessively high threshold  $p = 2.0$  caused the algorithm to misinterpret a post-peak fluctuation as a penetration event, confirming the overall robustness of our method. **Fig. S15(b)** presents the displacement curve from the unsuccessful penetration trial. In this case, the suboptimal initial grasping posture of the syringe caused the needle tip to slip upon contact, preventing the axial force from reaching the required level for penetration. Accordingly, no peak was detected, and the trial was classified as a failed puncture.

## Section S11. Fluid property estimation

Based on FringeTac, we conduct an experiment focusing on an open-loop tactile calibration task for fluid-related load perception, aiming to characterize the relationship between fringe displacement and grasped mass.

Using the high sensitivity of the sensor to tangential deformation, our goal is to infer the weight and indirectly the density of unknown liquids through tactile observation based on contact, without prior knowledge of the geometry of the container. As shown in **Fig. S14(a)**, FringeTac was integrated into one end of a robotic gripper mounted on a 6-DoF robotic arm. An empty plastic bottle was grasped with the fringe extension direction orthogonal to the bottle's central axis. Water was incrementally added in 50 ml steps, up to 400 ml. After each addition, a tactile image capturing fringe deformation was recorded.

We use the previously defined mean fringe displacement  $\Delta \bar{p}$  (in pixels) as an indicator to measure changes in liquid weight. This averaged metric is then used to fit a regression model that captures the relationship between fringe displacement and liquid mass.

To minimize the influence of the initial gripping posture and the inherent weight of the empty bottle, the image captured immediately after gripping the empty bottle is designated as the initial image, and changes in  $\Delta \bar{p}$  are calculated relative to this initial state. The experiment was repeated ten times. Nine trials were used to fit a quadratic model relating the liquid mass  $m$  (in grams) to fringe displacement:

$$\Delta \bar{p} = -0.000012m^2 + 0.0649m, \quad R^2 = 0.9992. \quad (\text{S15})$$

As illustrated in **Fig. S14(b)**, fringe displacement increases in a near-linear manner with the grasped mass, with only mild nonlinearity at higher loads. This result confirms that fringe displacement provides a stable and sensitive proxy for tangential load variation during grasping.

Based on the fitted model, we further conducted static density estimation for different liquids and dynamic mass monitoring during continuous pouring. As illustrated in **Fig. S14(c)**, FringeTac achieved low density estimation error for both water and 99.5% anhydrous ethanol. The average density estimation error of water (10th trial) is 0.0182g/ml, and the average density

estimation errors of 99.5% anhydrous ethanol (density: 0.79g/ml) are -0.0517g/ml and 0.0341g/ml, respectively.

After completing the static density estimation experiment, we conducted a dynamic monitoring experiment. 400 ml of water was continuously and evenly poured into the bottle, and the changes in liquid quality were monitored in real-time based on a predictive model, achieving precise tracking throughout the entire process. (**Video S2**).