



The FYZSS Pintle Hitch Flatdeck Hydraulic Dovetail Trailer Horizon Super Single is a rugged, high-capacity trailer built for serious hauling and user-friendly design. With 10K or 12K Super Single axles and up to 25,900 lbs GVWR, it offers a 102" wide deck and 12' hydraulic dovetail for easy loading. A 12" I-beam main frame and 10" high-tensile dovetail beam provide strength, while spring-loaded jacks, a KTI hydraulic pump with wireless remote, and LED lighting ensure functionality and safety. Features like the pine deck, lockable toolbox, and slide-in side steps make it a reliable, everyday performer.

STANDARD FEATURES

TRAILER SPECS:

DIMENSIONS:

AVAILABLE LENGTHS: 30', 32', 34', 36', 38', 40', 42', 44'

DECK WIDTH: 102"

DECK HEIGHT: 34"

WEIGHT RATING:

AXLE COUNT: 2

GAWR: 10,000 lbs, 12,000 lbs

GVWR: 25,000 lbs, 25,900 lbs

FINISH:

PAINT TYPE: Powdercoat

PREP: Steel Grit Blasted

COLORS: Military Green, Desert Tan, Flame Orange, Midnight Black, Spectra Yellow, Blue Horizon, Lime Green, Ash Grey, True Red, Pearl White, Cloud Grey, Navy Blue, Sunset Orange

WARRANTY:

AXLE WARRANTY: 6 Year Lippert Spring Axle Warranty

TRAILER WARRANTY: Three (3) Year Frame

One (1) Year Parts Warranty

FLATDECK HYDRAULIC DOVETAIL TRAILER HORIZON SUPER SINGLE

PINTLE HITCH

LENGTHS:	30' - 44'
DECK WIDTH:	102"
DECK HEIGHT:	34"
AXLE COUNT:	2
AXLE RATING:	10k, 12k SUPER SINGLES
GVWR:	25,000 - 25,900 lbs

30'-44'

LENGTHS


25K-25.9K

GVWR RANGE OPTIONS

12"

I-BEAM FRAME

**NECK
BOSS**
ENGINEERED
I-BEAM

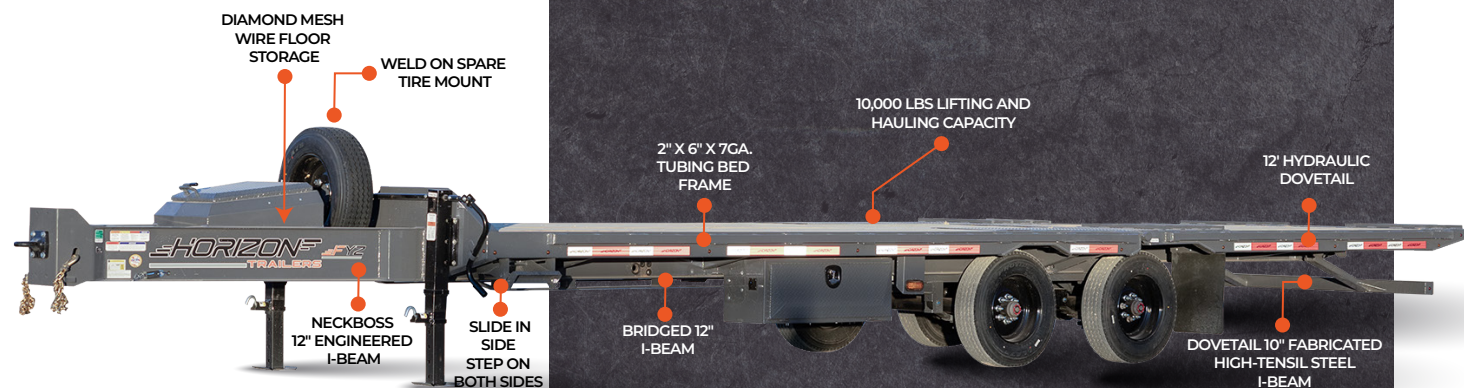

NOTE: Image shown may include optional features not standard to the model.

EVERY. DETAIL. MATTERS.

TONGUE:

TONGUE:

TYPE:	Neckboss 12" Engineered I-Beam
LENGTH:	83"
SPARE:	Weld On Spare Tire Mount
WINCH PLATE:	Winch Plate Behind Neck

COUPLER:

STANDARD COUPLER:	Pintle Ring (42,000 lbs)
-------------------	--------------------------

JACKS:

FRONT JACK:	2 Side Wind Spring Loaded Drop Jack Legs (12,000 lbs)
-------------	---

TOOLBOX:

TOOLBOX:	Diamond Mesh Wire Floor Storage
----------	---------------------------------

SAFETY:

SAFETY CHAINS:	3/8" Grade 70 Safety Chain w/Clevis Hook (2 each)
----------------	---

CHASSIS:

FRAME:

25K- 25.9K GVWR MAIN FRAME:	12" I-Beam (19 lbs/ft)
TORQUE TUBE:	4,1/2" Tube
DOVETAIL FRAME:	10" Engineered High-Tensile Steel I-Beam

SIDE:

LEFT SIDE:	Lockable Toolbox (Houses Batteries And Pump)
------------	--

DECK:

BED:

REAR OF DECK:	12' Dovetail
DECK FRAME:	2" x 6" x 7ga. Tubing Bed Frame
FLOORING:	Pine Lumber Floor
CROSSMEMBERS:	3" Channel (3.50 lbs/ft) 16" Spacing
DECK HEIGHT:	34"
DECK WIDTH:	102"

DOVETAIL:

DECK FRAME:	2" x 6" x 7ga. Tubing Bed Frame
FLOORING:	Pine Lumber Floor
CROSSMEMBERS:	3" I-Beam
DECK HEIGHT:	34"
DECK WIDTH:	102"
DOVETAIL LENGTH:	12'
HAULING CAPACITY:	10,000 lbs When Weight Distributed Across Length Of Deck

TILT:	13° (Tilt)
-------	------------

SIDES:

RUB RAIL:	2" x 3/8" Rub Rail
STAKE POCKETS:	1,5/8" x 3,5/8" (ID) Stake Pockets (Spaced At 24")
SPOOLS:	2" x 10ga. Pipe Spools (Spaced At 24")
SIDES:	Slide In Side Step On Both Sides

LIFT SYSTEM:

HYDRAULICS:

SYSTEM:	2 Button Hydraulic - Power Up / Power Down
PUMP:	KTI 12V Hydraulic Pump
CONTROLLER:	14' Control Cable
WIRELESS CONTROLLER:	Tuff Wireless 2 Button Wireless Remote

12' DOVETAIL:

CYLINDERS:	2 - 4" X 16" Single Push Cylinders
LIFT CAPACITY:	10,000 lbs When Weight Distributed Across Length Of Deck

RUNNING GEAR:

TIRES:

10K - 12K AXLES:	ST235/75R17.5, Super Single 18PR 6005 lbs
RIMS:	17.5" Black Mod Wheels

AXLES:

10K AXLE TYPE:	10k Lippert Electric Brake Auto Adjust S/Single Oil Bath Spring Axles 8 On 6.5"
12K AXLE TYPE:	12k Lippert Electric Brake Auto Adjust S/Single Oil Bath Spring Axles 8 On 6.5"
AXLE COUNT:	2 Axles
AXLE WARRANTY:	6 Year Lippert Spring Axle Warranty

SUSPENSION:

10K - 12K AXLE SUSPENSION TYPE:	Universal Slipper Spring Hangers
---------------------------------	----------------------------------

ELECTRICAL AND LIGHTING:

BATTERY AND CHARGING:

BATTERY:	2 - Interstate 27 Deep Cycle Batteries
WIRING HARNESS:	All-Weather Wiring Harness (7-Way RV)
FRAME WIRING:	Double Insulated Wiring Harness

LIGHTING:

LIGHTS:	DOT Approved Tecnique LED Lights
---------	----------------------------------

SAFETY:


REFLECTIVE TAPE:	3M Dot Compliant Reflective Tape
------------------	----------------------------------

COLORS:

ACTUAL COLOR MAY VARY, CHECK SPECIFIC MODEL PAGE FOR AVAILABLE COLORS



SCAN ME



EVERY. DETAIL. MATTERS.