



The **RDZ Bumper Pull Roll Off Dump Trailer** is engineered for durable and reliable roll-off applications, available in 14' and 16' lengths with GVWR options of 15,200 lbs and 17,000 lbs. It features a 10" I-beam frame, 2" x 3" x 7ga. bed tubing, and a 30" deck height. Equipped with a 20,000 lb hoist or 12-ton telescopic cylinder, greasable rollers, DOT LED lights, and Winchmax cable winch, **it delivers strength and reliable performance.**

STANDARD FEATURES

TRAILER SPECS:

DIMENSIONS:

AVAILABLE LENGTHS: 14', 16'

DECK WIDTH: 61"

DECK HEIGHT: 30"

WEIGHT RATING:

AXLE COUNT: 2

GAWR: 7,000 lbs, 8,000 lbs

GVWR: 15,200 lbs, 17,000 lbs

FINISH:

PAINT TYPE: Powdercoat

PREP: Steel Grit Blasted

COLORS: Military Green, Desert Tan, Flame Orange, Midnight Black, Spectra Yellow, Blue Horizon, Lime Green, Ash Grey, True Red, Pearl White, Cloud Grey, Navy Blue, Sunset Orange

STYLE: 2 Tone Colors Available, Chassis / Dump

WARRANTY:

AXLE WARRANTY: 6 Year Lippert Spring Axle Warranty

TRAILER WARRANTY: Three (3) Year Frame

One (1) Year Parts Warranty

ROLL OFF DUMP TRAILER HORIZON

BUMPER PULL

LENGTHS:	14', 16'
DECK HEIGHT:	30"
AXLE COUNT:	2
AXLE RATING:	7k, 8k
GVWR:	15,200 lbs - 17,000 lbs

14'-16'


LENGTHS

15.2K - 17K

GVWR RANGE OPTIONS

10"

I-BEAM FRAME

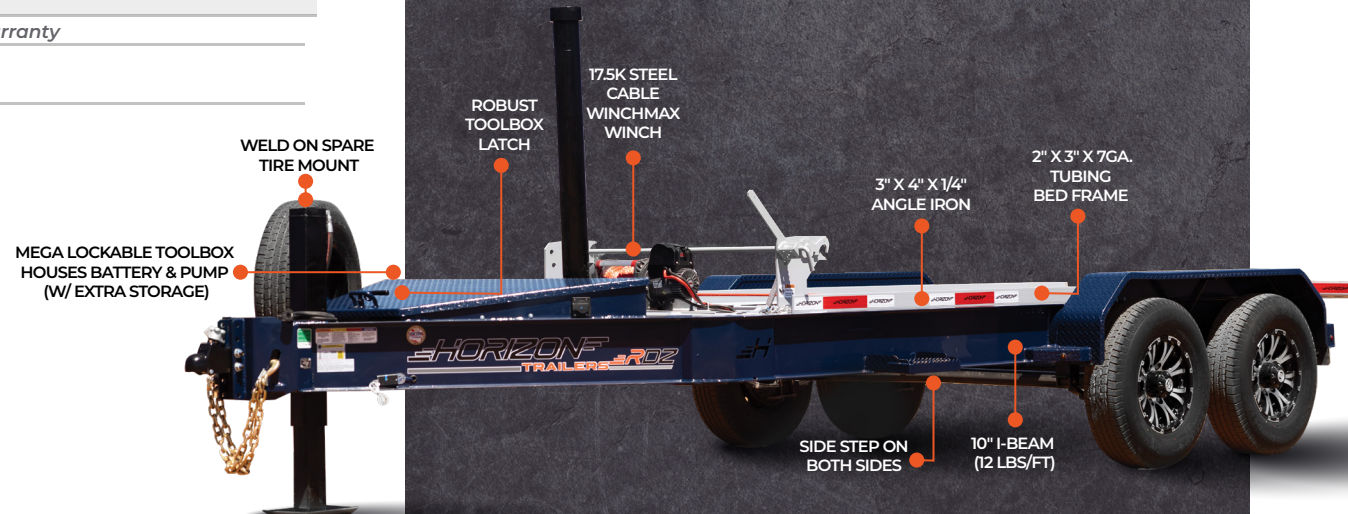

NECK™
BOSS™
ENGINEERED
I-BEAM

EVERY. DETAIL. MATTERS.

NOTE: Image shown may include optional features not standard to the model.

TONGUE:

TONGUE:

TYPE:	Neckboss 10" Engineered I-Beam
LENGTH:	60"
SPARE:	Weld On Spare Tire Mount

COUPLER:

STANDARD COUPLER:	Adjustable Auto Latch 2-5/16" Bp Coupler (17,000 lbs)
-------------------	---

JACKS:

FRONT JACK:	1 Side Wind Spring Loaded Drop Jack Leg (12,000 lbs)
-------------	--

TOOLBOX:

TOOLBOX:	Mega Lockable Toolbox Houses Battery & Pump (w/ Extra Storage)
----------	--

SAFETY:

SAFETY CHAINS:	3/8" Grade 70 Safety Chain w/Clevis Hook (2 each)
----------------	---

CHASSIS:

FRAME:

15.2K GVWR MAIN FRAME:	10" I-Beam (12 lbs/ft)
17K GVWR MAIN FRAME:	10" I-Beam (15 lbs/ft)

DUMP:

BED:

DECK HEIGHT:	30"
FRAME:	2" x 3" x 7ga. Tubing Bed Frame
CROSSMEMBERS:	2" x 3" x 7ga. Crossmembers
LOADING ANGLE:	58°
DUMP ANGLE:	51°
BOTTOM RAIL DECK WIDTH:	61"

SIDES:

TYPE:	3" x 4" x 1/4" Angle Iron
FENDERS:	14ga. Diamond Plate Steel Fenders

SAFETY:

SAFETY CHAINS FOR ROLL OFF:	2 - 1/4" 30 Grade Chains w/Clevis Hook
-----------------------------	--

LIFT SYSTEM:

HYDRAULICS:

HOIST DUMP 14', 16':	Hoist w/ 6" x 21" Single Push Cylinder (20,000 lbs)
SYSTEM:	2 Button Hydraulic - Power Up / Power Down
PUMP:	KTI 12V Hydraulic Pump
CONTROLLER:	14' Control Cable
TELESCOPIC DUMP 14', 16':	Telescopic Cylinder (12 Ton)
SYSTEM:	2 Button Hydraulic - Power Up / Gravity Down
PUMP:	KTI 12V Hydraulic Pump
CONTROLLER:	14' Control Cable

RUNNING GEAR:

TIRES:

7K AXLES:	Radial Tires ST235/80R16 10PR 3,520 lbs
8K AXLES:	Radial Tires ST235/85R16 14PR 4,400 lbs
RIMS:	16" Black Mod Wheels

AXLES:

7K AXLE TYPE:	7k Lippert Electric Brake Auto Adjust EZ Lube Spring Axles 8 On 6.5"
8K AXLE TYPE:	8k Lippert Electric Brake Auto Adjust Oil Bath Spring Axles 8 On 6.5"
AXLE COUNT:	2 Axles
AXLE WARRANTY:	6 Year Lippert Spring Axle Warranty

SUSPENSION:

SUSPENSION TYPE:	Spring
------------------	--------

ELECTRICAL AND LIGHTING:

BATTERY AND CHARGING:

BATTERY:	2 - Interstate 27 Deep Cycle Batteries
SOLAR:	10 Watt Solar Panel
CHARGING SYSTEM:	110V Integrated Trickle Charger
WIRING HARNESS:	All-Weather Wiring Harness (7-Way RV)
FRAME WIRING:	Double Insulated Wiring Harness

LIGHTING:


LIGHTS:	DOT Approved Tecniq LED Lights
---------	--------------------------------

SAFETY:


REFLECTIVE TAPE:	3M Dot Compliant Reflective Tape
------------------	----------------------------------

COLORS:

ACTUAL COLOR MAY VARY, CHECK SPECIFIC MODEL PAGE FOR AVAILABLE COLORS



SCAN ME



EVERY. DETAIL. MATTERS.