

11

10

9

8

7

◊

5

4


3

2

1

BILL OF MATERIAL

Item No.	Part No.	Description	Quantity
1	00595-414	BAR, 1 1/2" X 1/2" X 5", ASTM A-36	1
2	M102683-000	STIFFENER, FULCRUM	1
3	M102684-001	FULCRUM, DEAD LEVER ANCHOR	1
4	M113369-000	SUPPORT, DEAD LEVER ANCHOR	1

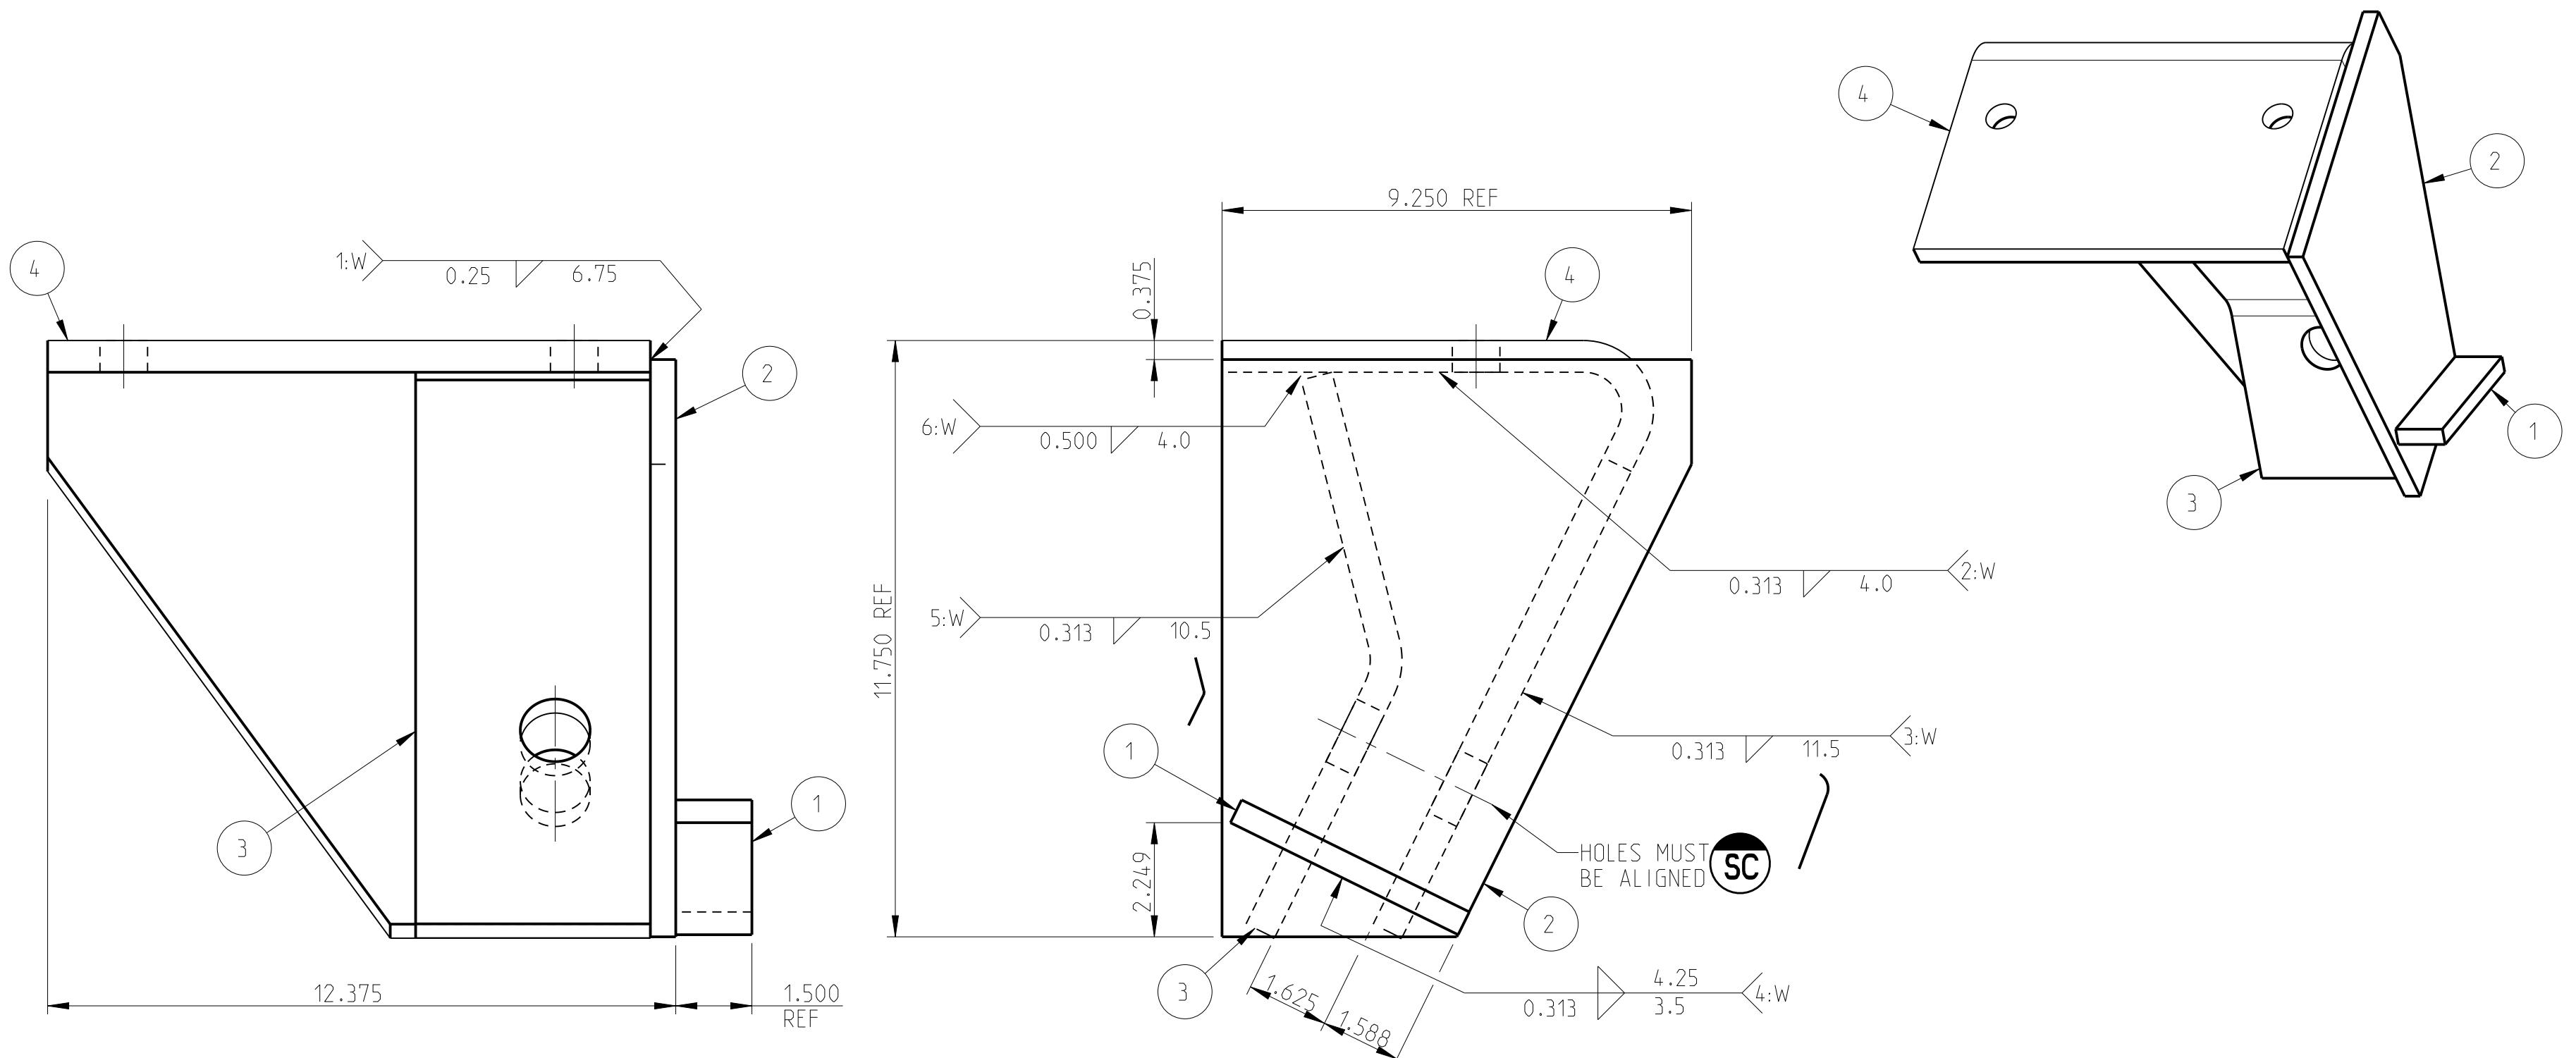

Level	Date	Approved	Description
REVISIONS			

FreightCar America

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF FREIGHTCAR AMERICA AND CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION. BY ACCEPTING THIS DRAWING, THE RECIPIENT AGREES (A) TO USE THIS DRAWING ONLY FOR THOSE PURPOSES APPROVED IN WRITING BY FREIGHTCAR AMERICA, (B) NOT TO REPRODUCE OR MODIFY THIS DRAWING, IN WHOLE OR IN PART, AND (C) NOT TO DISCLOSE THIS DRAWING TO ANY PERSON OR ENTITY, NOR USE THE DRAWING FOR THE DESIGN OR MANUFACTURE OF ANY ITEM, PART, OBJECT OR APPARATUS THEREOF, EXCEPT UPON THE PRIOR WRITTEN PERMISSION OF FREIGHTCAR AMERICA.

Standard Tolerances (Unless Noted)

Decimal Dimensions ± 0.063	Hole Diameters ± 0.031
Diagonals 0.125 Max. Variation	Angles $\pm 1^\circ$
Radii will be thickness of material	Tolerances are not accumulative
Made By: MHK/BMH	Date: 07-27-16 Ref Dwg: A102686-001
Approved: MHK/MHK	Do Not Scale Drawing Est. Wt: 58.10 lbs

ASSEMBLY, FULCRUM, DEAD LEVER

Size	Drawing / Part Number	Rev.
C	A113368-000	-

SC SPECIAL CHARACTERISTIC - FEATURE THAT IS "KEY" TO FORM, FIT, AND FUNCTION OF THE PART/ASS'Y

NOTE:

1. ALL WELDING TO BE IN ACCORDANCE WITH RAILROAD WELDING SPECIFICATION AWS D15.1, LATEST REVISION, AND TO BE CLASS 2 UNLESS OTHERWISE NOTED.
2. UNLESS OTHERWISE NOTED, ALL WELD LENGTHS SHOWN ARE MINIMUM LENGTHS, WELD TERMINATIONS FOR FILLET WELDS MUST HAVE A MINIMUM EDGE DISTANCE OF 0.25.