
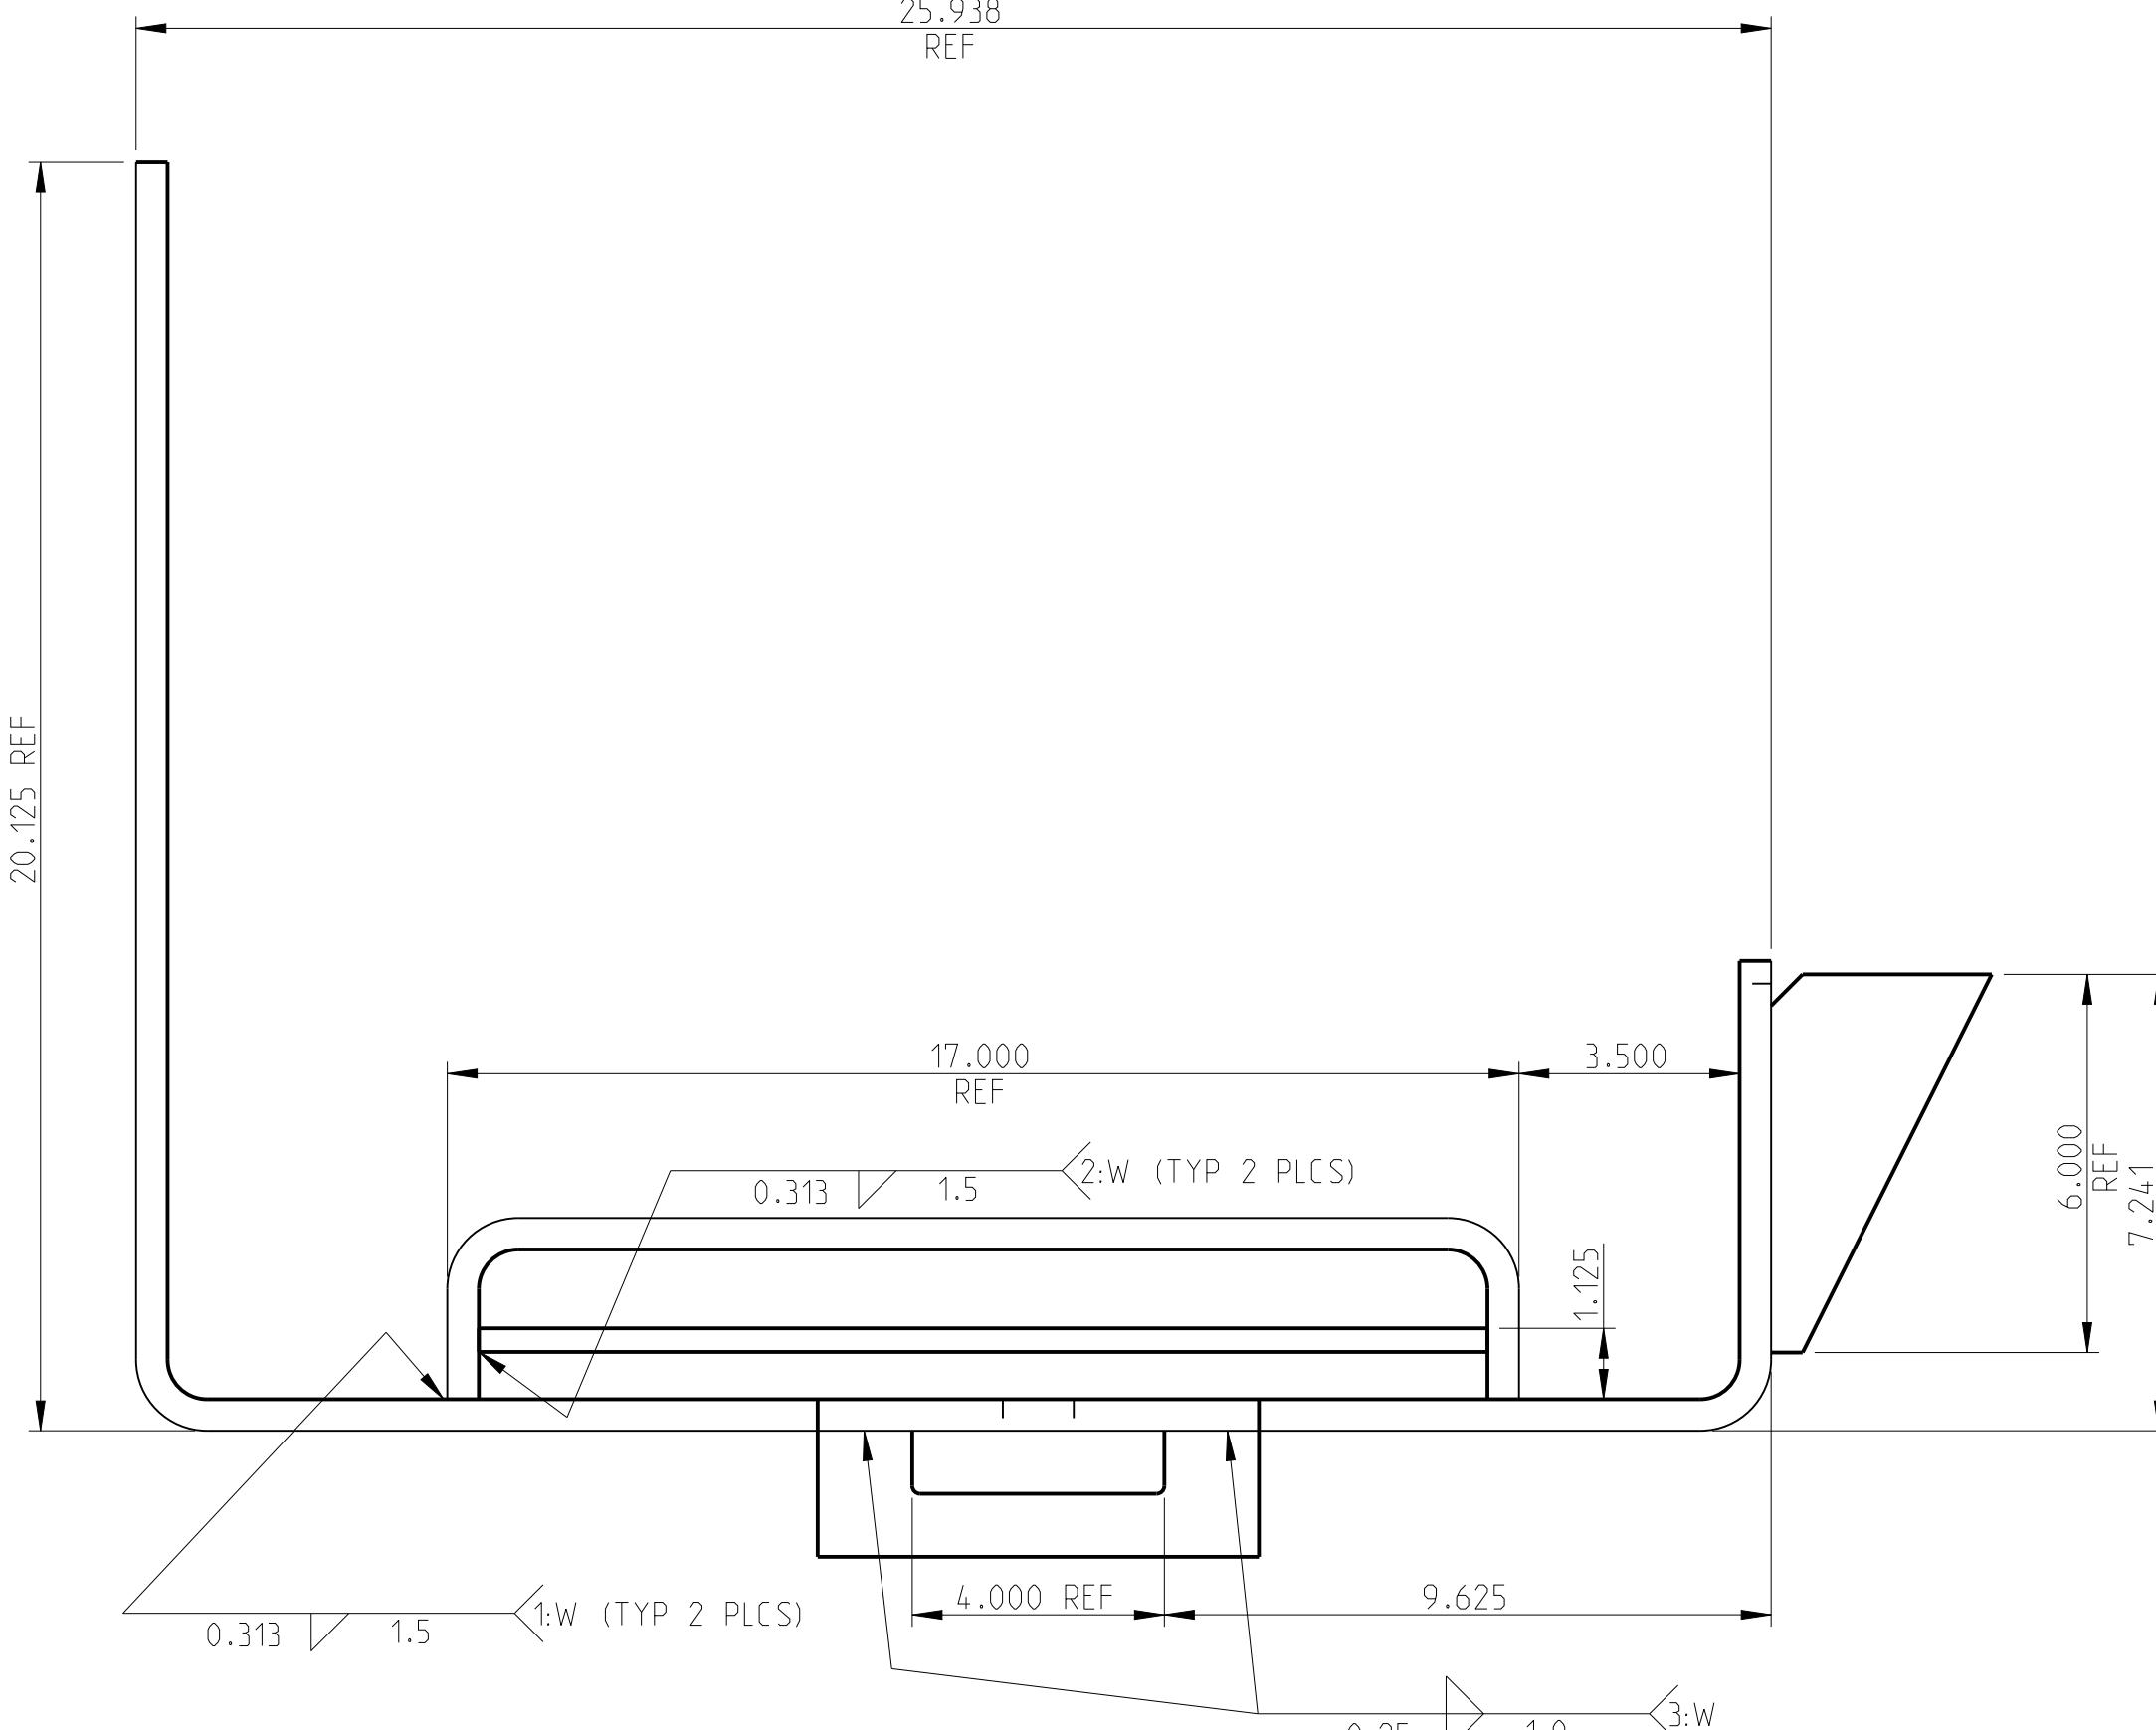


11 10 9 8 7 ◇ 5 4 3 2 1

25.938
REF**BILL OF MATERIAL**

Item No.	Part No.	Description	Quantity
1	00595-365	BAR, 2" X 3/8" X 16", ASTM A-36	1
2	M101171-097	GUSSET, -	1
3	M101528-006	GUIDE, HORIZ. LEVER	1
4	M108918-000	FULCRUM, ACTUATOR LEVER	1
5	M109048-000	GUIDE, ACTUATOR LEVER	1

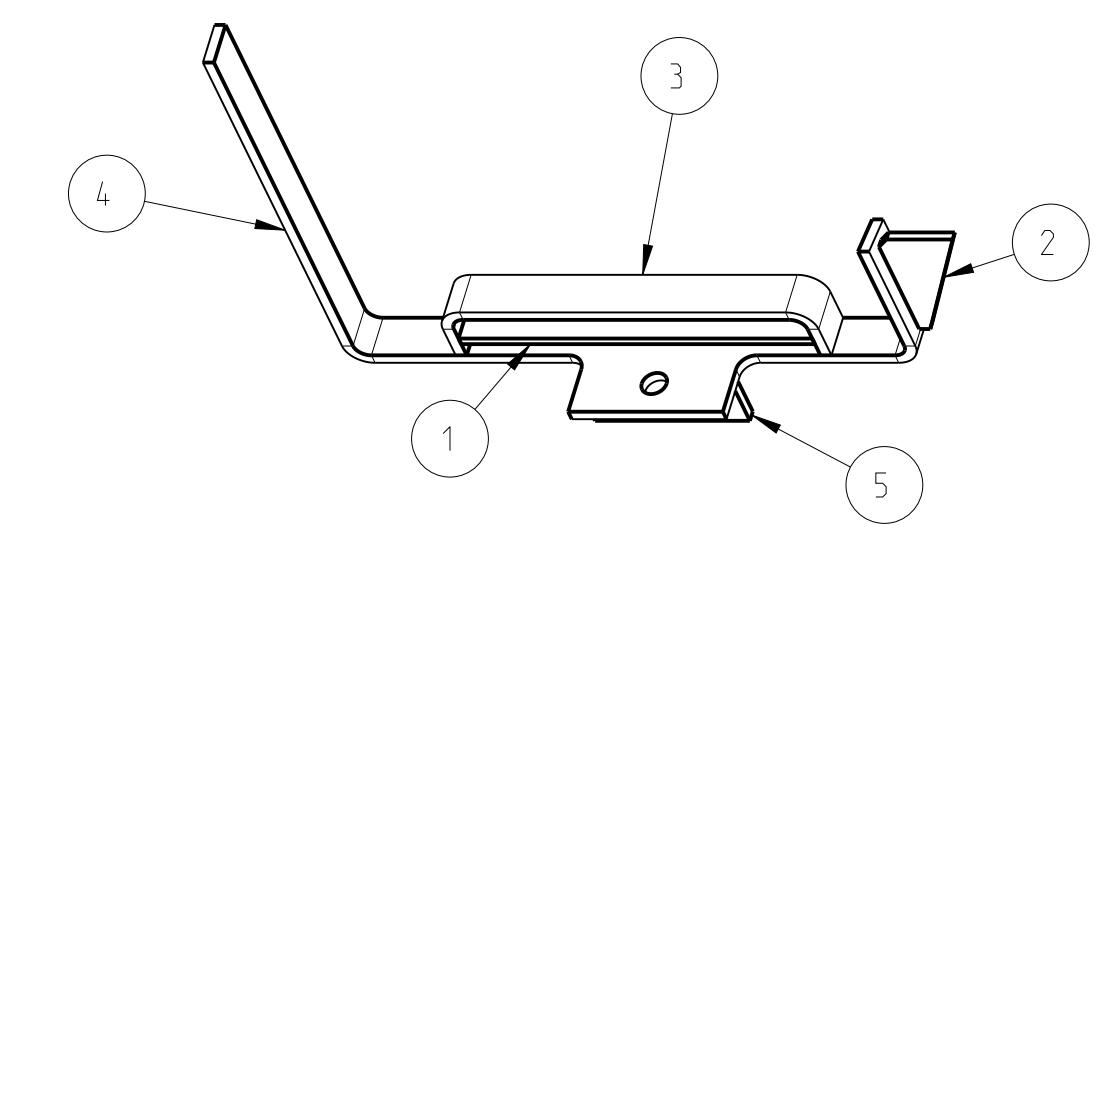

A 12-06-12 CSWSW PART M109048-000 REPLACED

M101030-001. UPDATED WELD 3:W

Level Date Approved Description

REVISIONS**FreightCar America**

THIS DRAWING IS THE EXCLUSIVE PROPERTY OF FREIGHTCAR AMERICA AND CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION. BY ACCEPTING THIS DRAWING, THE RECIPIENT AGREES (A) TO USE THIS DRAWING ONLY FOR THOSE PURPOSES APPROVED IN WRITING BY FREIGHTCAR AMERICA, (B) NOT TO REPRODUCE OR MODIFY THIS DRAWING, IN WHOLE OR IN PART, AND (C) NOT TO DISCLOSE THIS DRAWING TO ANY PERSON OR ENTITY, NOR USE THE DRAWING FOR THE DESIGN OR MANUFACTURE OF ANY ITEM, PART, OBJECT OR APPARATUS THEREOF, EXCEPT UPON THE PRIOR WRITTEN PERMISSION OF FREIGHTCAR AMERICA.

Standard Tolerances (Unless Noted)

Decimal Dimensions ± 0.063	Hole Diameters ± 0.031
Diagonals 0.125 Max. Variation	Angles $\pm 1^\circ$
Radii will be thickness of material	Tolerances are not accumulative

Made By: CSW / JML Date: 09-21-12 Ref Dwg: -

Approved: CSW Do Not Scale Drawing Est. Wt: 29.54 lbs

ASSEMBLY, ACTUATOR LEVER FULCRUM

Size C	Drawing / Part Number A108919-000	Rev. A
--------	-----------------------------------	--------

NOTE:

ORIGINAL ACTUATOR LEVER WAS DESIGNED WITH A PINNED CONNECTION. ASSEMBLY WAS REVISED TO A FLOATING DESIGN. SEE REVISION A.

NOTE:

- ALL WELDING TO BE IN ACCORDANCE WITH RAILROAD WELDING SPECIFICATION AWS D15.1, LATEST REVISION, AND TO BE CLASS 2 UNLESS OTHERWISE SPECIFIED.
- UNLESS OTHERWISE NOTED, ALL WELD LENGTHS SHOWN ARE MINIMUM LENGTHS, WELD TERMINATIONS FOR FILLET WELDS MUST HAVE A MINIMUM EDGE DISTANCE OF 0.25.