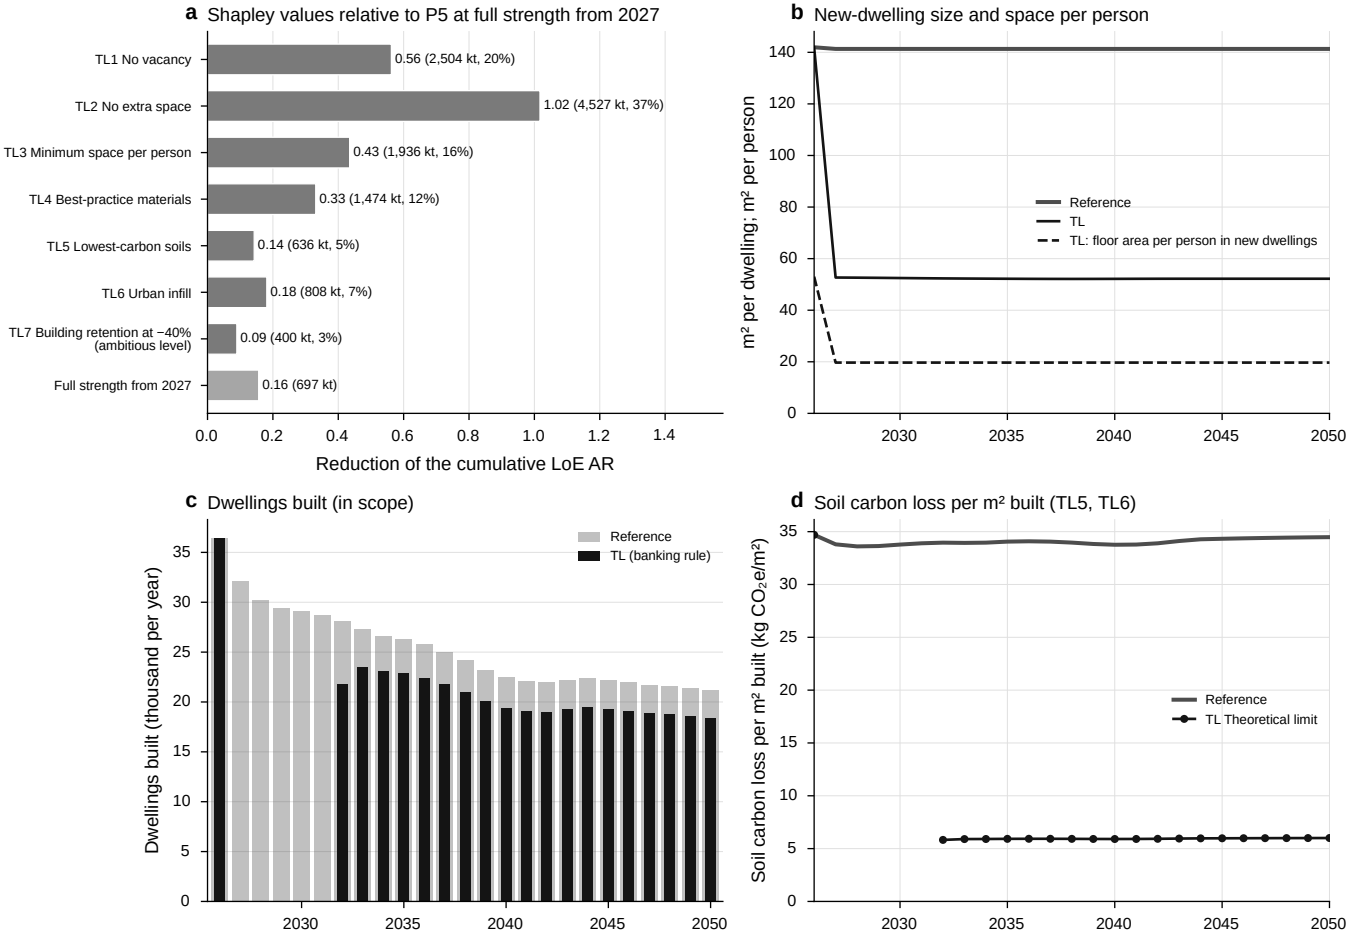
a Shapley values relative to P5 at full strength from 2027
TL1 No vacancy
TL2 No extra space
TL3 Minimum space per person
TL4 Best-practice materials
TL5 Lowest-carbon soils
TL6 Urban infill
TL7 Building retention at −40% (ambitious level)
Full strength from 2027
0.56 (2,504 kt, 20%)
1.02 (4,527 kt, 37%)
0.43 (1,936 kt, 16%)
0.33 (1,474 kt, 12%)
0.14 (636 kt, 5%)
0.18 (808 kt, 7%)
0.09 (400 kt, 3%)
0.16 (697 kt)
0.0 0.2 0.4 0.6 0.8 1.0 1.2 1.4
Reduction of the cumulative LoE AR
b New-dwelling size and space per person
m² per dwelling; m² per person
Reference
TL
TL: floor area per person in new dwellings
2030 2035 2040 2045 2050
c Dwellings built (in scope)
Dwellings built (thousand per year)
Reference
TL (banking rule)
2030 2035 2040 2045 2050
d Soil carbon loss per m² built (TL5, TL6)
Soil carbon loss per m² built (kg CO₂e/m²)
Reference
TL Theoretical limit
2030 2035 2040 2045 2050