


Electrical power configuration and wiring
1. Main switch: 25 mm² wiring, three-phase five-wire system
2. Main unit: 30 kW
3. UV6 group: 35 kW
4. Chiller 1: 6 kW
5. Chiller 2: 6 kW



Note:
1. The installation surface must have a height difference of no more than 5mm and a load-bearing capacity exceeding 300 kg/m².
2. Supply air pressure: 6bar²; average air consumption: 35 l/min.
3. Printing workshop must maintain constant temperature (24°C) and humidity (60% relative humidity).

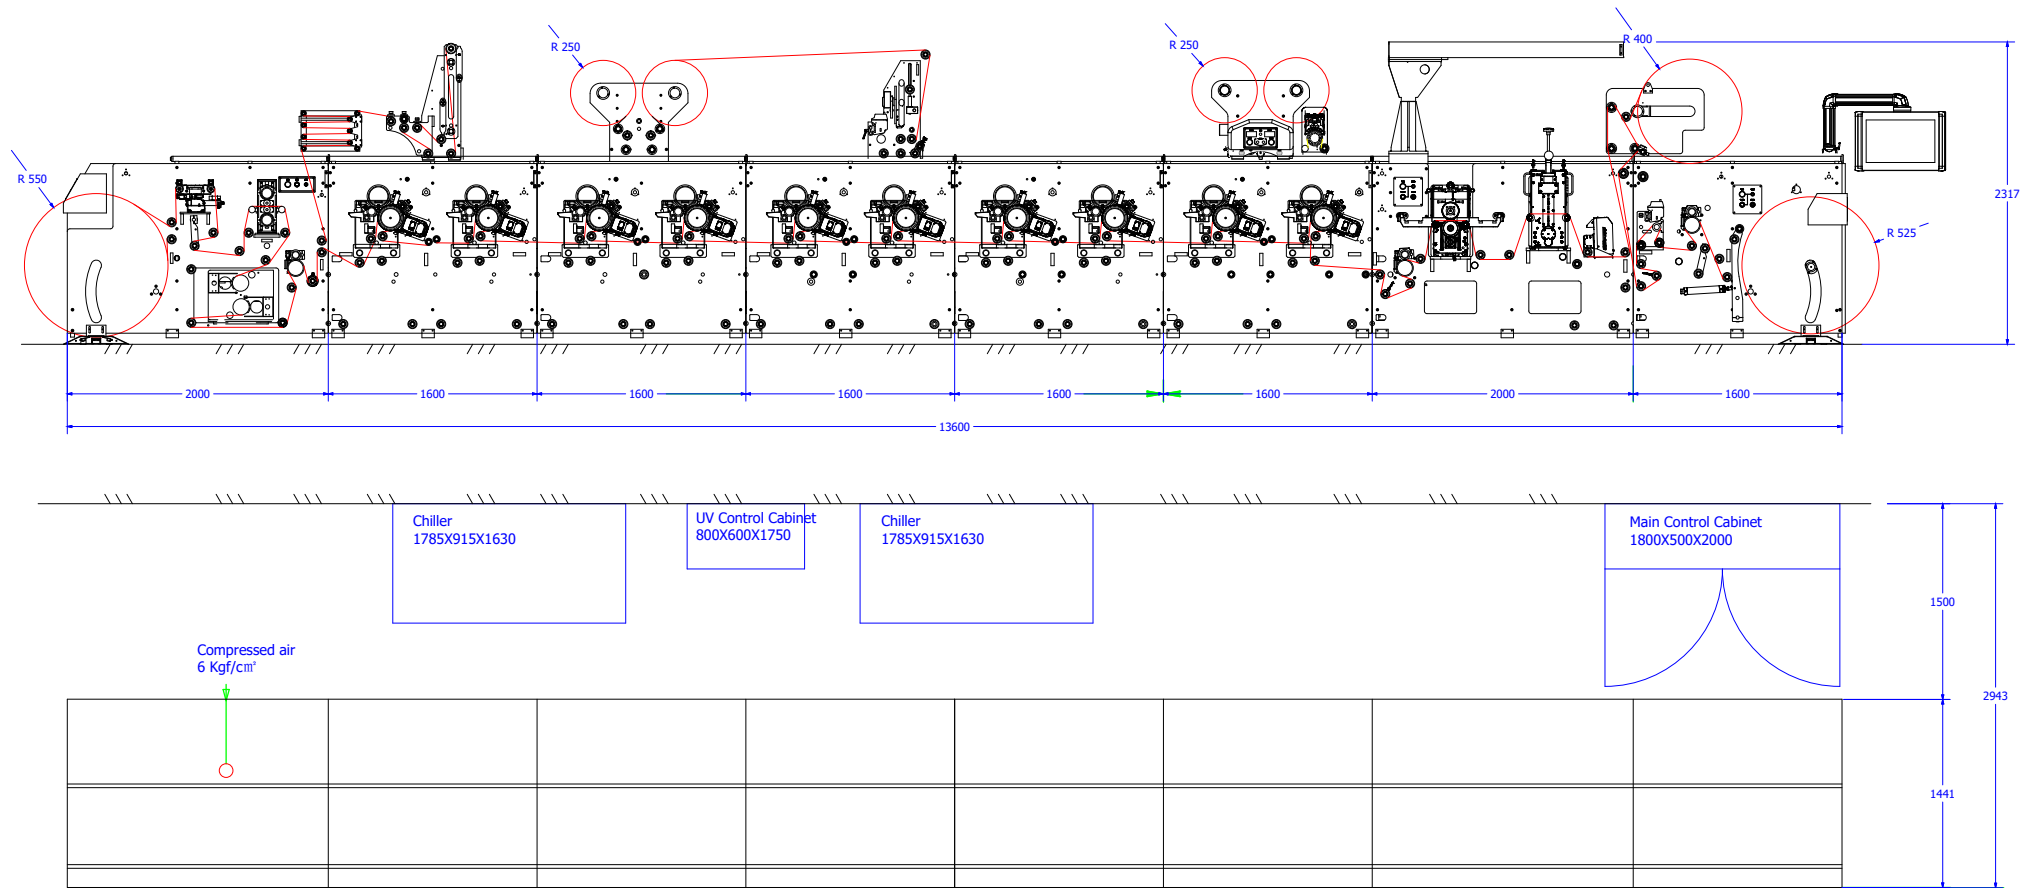

Marco Aengenvoort
marco@rotocon.world
+49 171 412 7505

Drawings_new Asteria



ROTOCON

Amsinckstraße 71b
20097 Hamburg Germany
Tel +49 2471 135 4455
info@rotocon.world



Änderungen vorbehalten