

VLANs per Student Rack

Vlan 10 – Management
Vlan 20 - VM-Hosts
Vlan 30 - Appliance-Servers
Vlan 40 – Data-Users
Vlan 99 – Native-Vlan

Subnets per Student Rack

RA0X-L

Vlan 10 – 172.16.x.0/28
Vlan 20 – 172.16.x.16/28
Vlan 30 – 172.16.x.32/28
Vlan 40 – 172.16.x.48/28

RA0X-R


Vlan 10 – 172.16.x.128/28
Vlan 20 – 172.16.x.144/28
Vlan 30 – 172.16.x.160/28
Vlan 40 – 172.16.x.176/28

IP addressing solid structure Subnets Student Rack

1ste client address - HRSP/VRRP default-gateway
2nd client address - LAB-RA0X-C01(02)-R01
3rd client address - LAB-RA0X-C01(02)-R02
4th client address - LAB-RA0X-C01(02)-R03
5th client address - LAB-RA0X-A01(02)-SW01 (mgmt subnet only)
6th client address - LAB-RA0X-A01(02)-SW02 (mgmt subnet only)
7th client address - LAB-RA0X-A01(02)-SW03 (mgmt subnet only)

X = student rack number

C01 – core student RA0X-L
A01 – access student RA0X-L
C02 – core student RA0X-R
A02 – access student RA0X-R

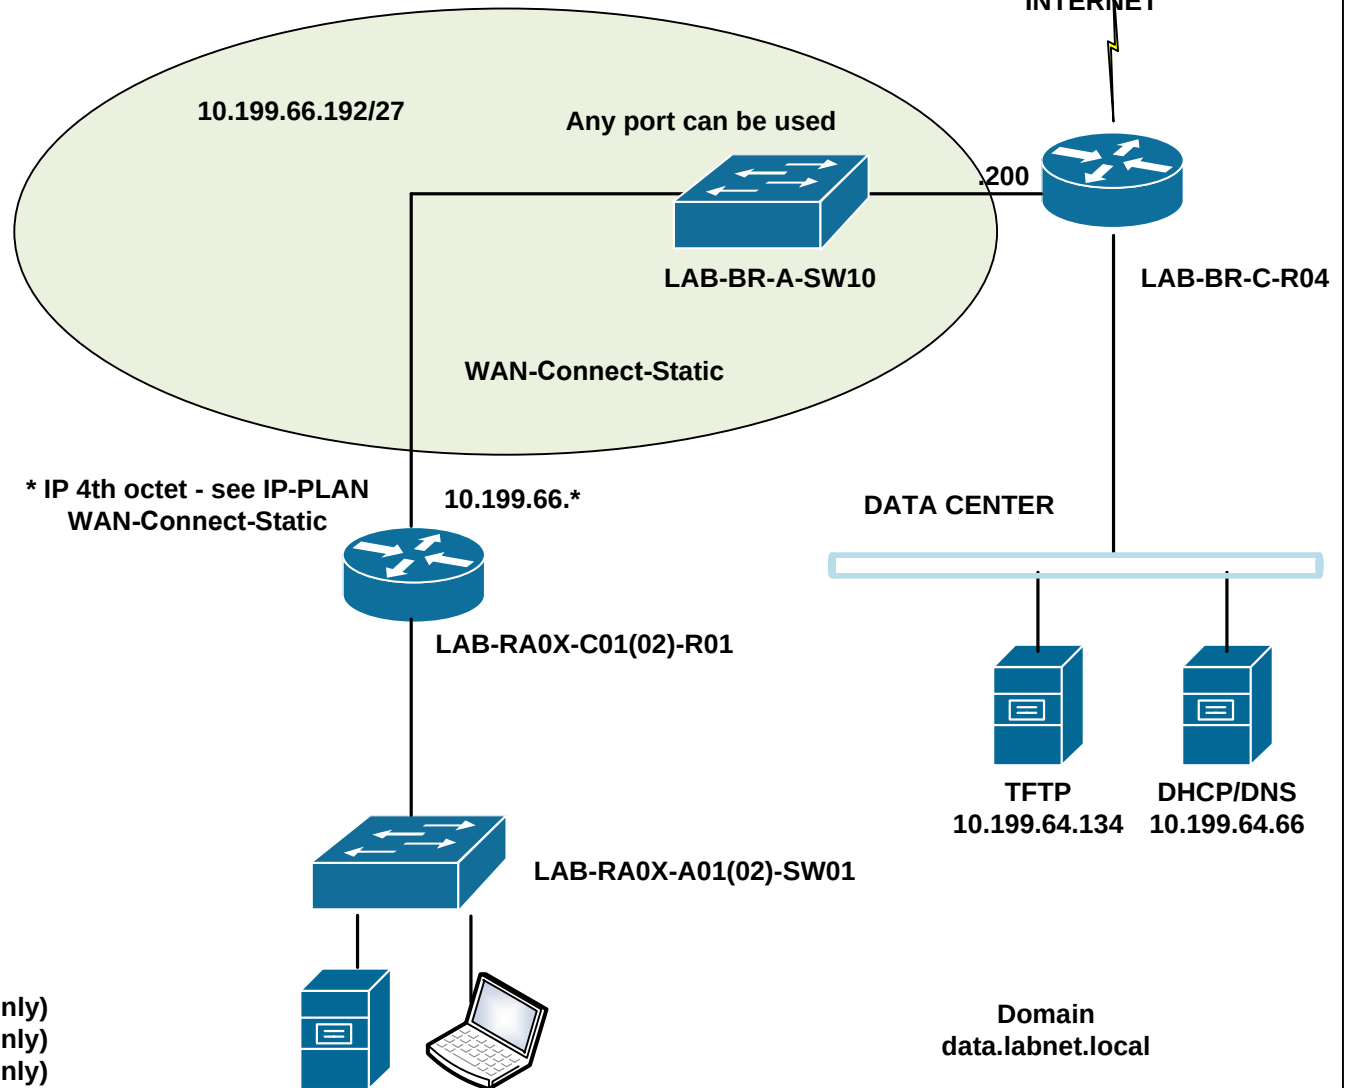

Title:

LAB 1 – BASIC LAN Network Infrastructure

Drawn by:

Wim Leppens

Group(s):

2SNE

Page 1 of 1

Version: V1.0

Date:

26-11-24