Company name:
Created by:
Phone:

Date: 13/10/2026

Qty.	Description
1	**UPS 25-50 180**



Note! Product picture may differ from actual product

Product No.: On request

The pump is of the canned rotor type, i.e. pump and motor form an integral unit without shaft seal and with only two gaskets for sealing.
The bearings are lubricatd by the pumped liquid.
The pump has 3-step speed selector.
The pump is characterized by:

* Ceramic shaft and radial bearings.
* Carbon axial bearing.
* Stainless steel rotor can and bearing plate.
* Corrosion-resistant impeller, Composite, PES/PP.
* Cast iron pump housing.

The motor is a 1-phase motor.
No additional motor protection is required.

Controls:

Terminal box position:	9H

Liquid:

Pumped liquid:	Water
Maximum liquid temperature:	110 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m³

Technical:

TF class:	110
Approvals:	VDE,GS,CE

Materials:

Pump housing:	Cast iron EN-JL1030 ASTM 30B
Impeller:	Composite, PES/PP

Installation:

Maximum ambient temperature:	80 °C
Maximum operating pressure:	10 bar
Size of connection:	G 1 1/2 inch
Pressure rating for connection:	PN 10

GRUNDFOS

Company name:
Created by:
Phone:


Date: 13/10/2026

Qty.	Description	
1	Port-to-port length:	180 mm
	Terminal box position:	9H
	Electrical data:	
	Mains frequency:	50 Hz
	Rated voltage:	1 x 230 V
	Capacitor size - run:	2.5 µF
	Enclosure class (IEC 34-5):	IP44
	Insulation class (IEC 85):	F
	Built-in motor protection:	NONE
	Others:	
	Net weight:	2.6 kg
	Gross weight:	2.8 kg
	Shipping volume:	0.004 m³


Company name:
Created by:
Phone:

Date: 13/10/2026

On request UPS 25-50 180 50 Hz

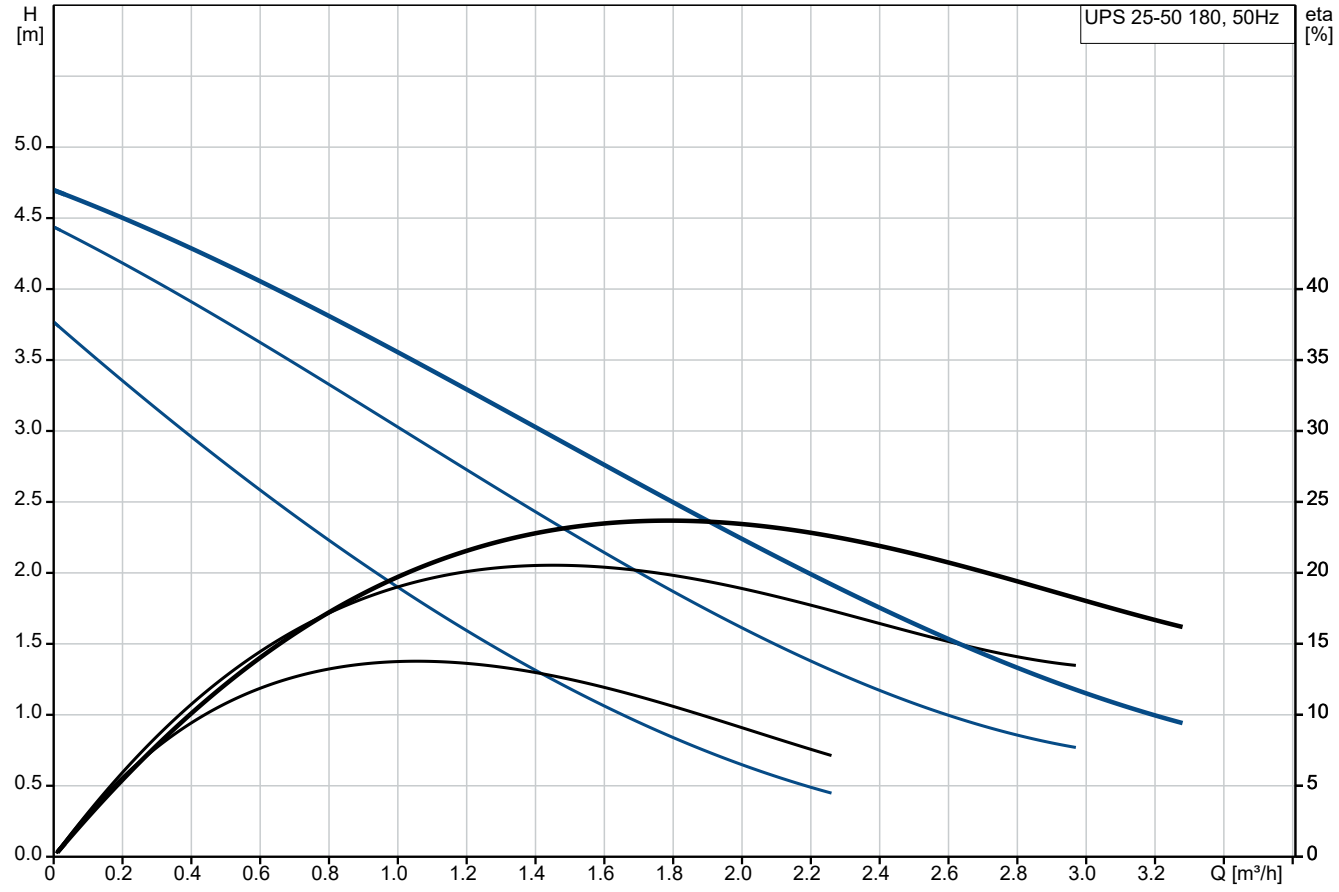


Pumped liquid = Water
Liquid temperature during operation = 20 °C
Density = 998.2 kg/m³

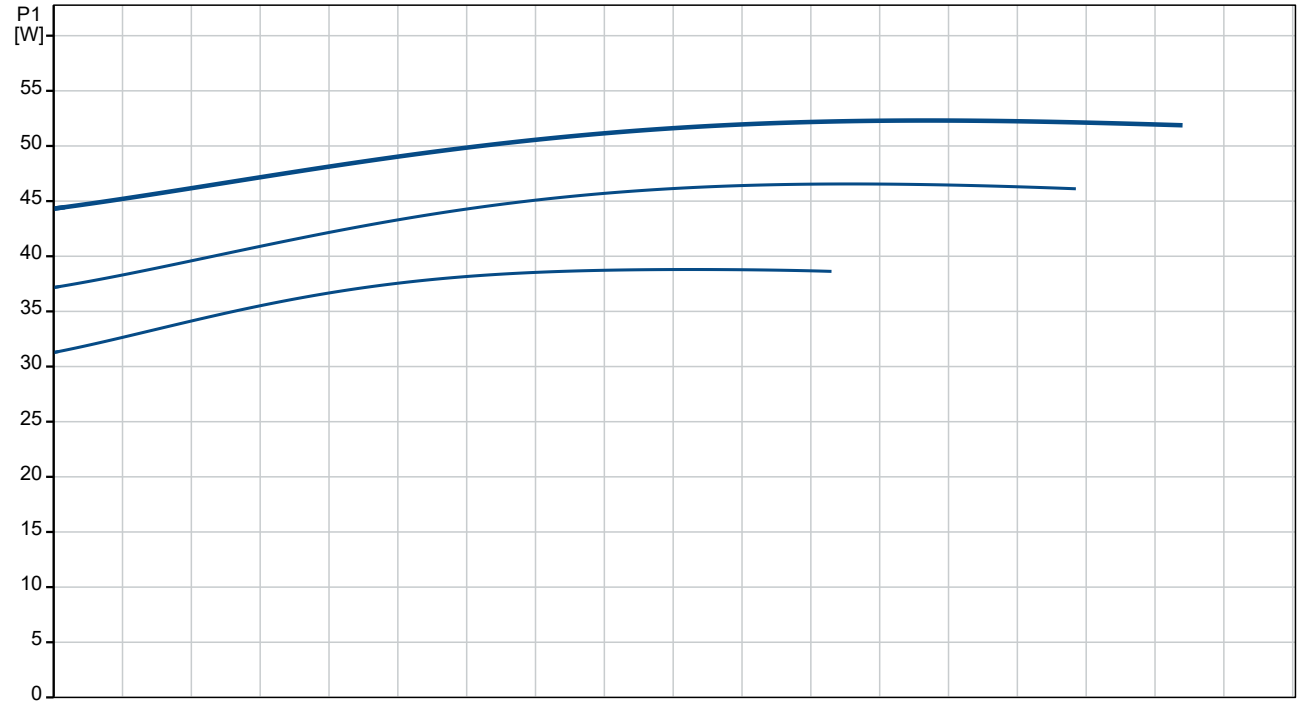


Company name:
Created by:
Phone:


Date: 13/10/2026


Description	Value
General information:	
Product name:	UPS 25-50 180
Product No:	On request
EAN number:	On request
Price:	
Technical:	
Speed no:	3
Maximum head:	50 dm
TF class:	110
Approvals:	VDE,GS,CE
Materials:	
Pump housing:	Cast iron
	EN-JL1030
	ASTM 30B
Impeller:	Composite, PES/PP
Installation:	
Maximum ambient temperature:	80 °C
Maximum operating pressure:	10 bar
Size of connection:	G 1 1/2 inch
Pressure rating for connection:	PN 10
Port-to-port length:	180 mm
Terminal box position:	9H
Liquid:	
Pumped liquid:	Water
Maximum liquid temperature:	110 °C
Selected liquid temperature:	20 °C
Density:	998.2 kg/m³
Electrical data:	
Mains frequency:	50 Hz
Rated voltage:	1 x 230 V
Capacitor size - run:	2.5 µF
Enclosure class (IEC 34-5):	IP44
Insulation class (IEC 85):	F
Built-in motor protection:	NONE
Thermal protec:	Impedance protected
Controls:	
Terminal box position:	9H
Others:	
Net weight:	2.6 kg
Gross weight:	2.8 kg
Shipping volume:	0.004 m³

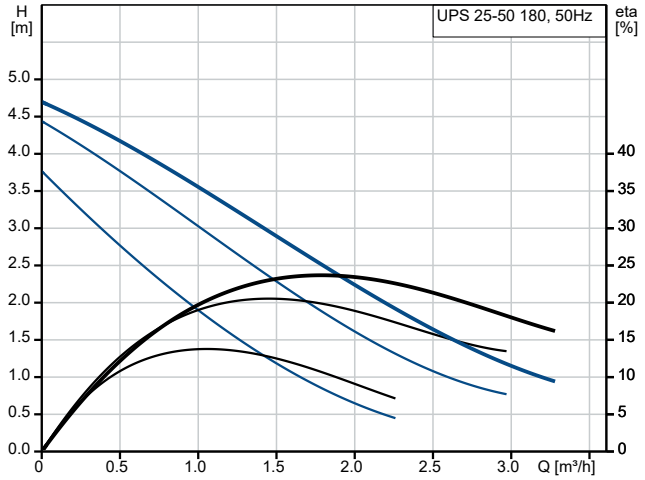

Pumped liquid = Water
Liquid temperature during operation = 20 °C
Density = 998.2 kg/m³

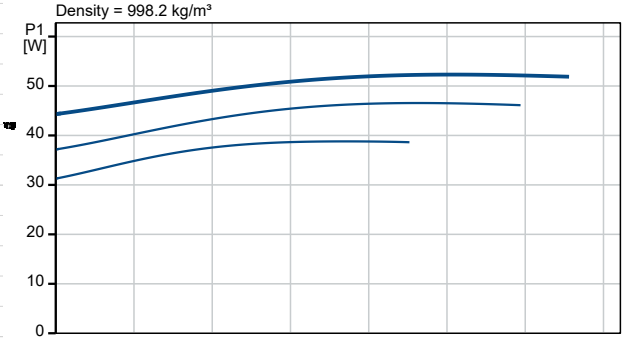

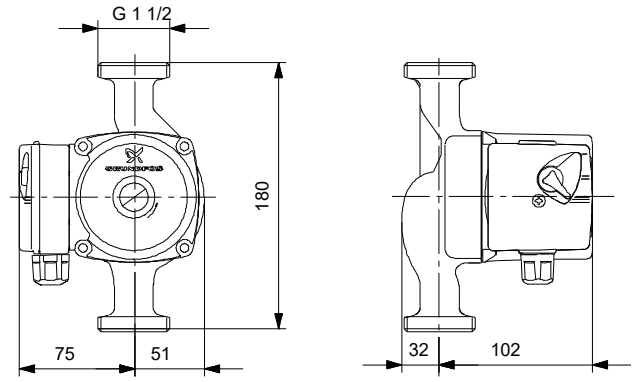


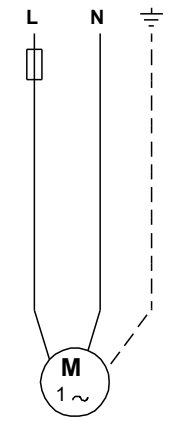


Company name:
Created by:
Phone:

Date: 13/10/2026

On request UPS 25-50 180 50 Hz

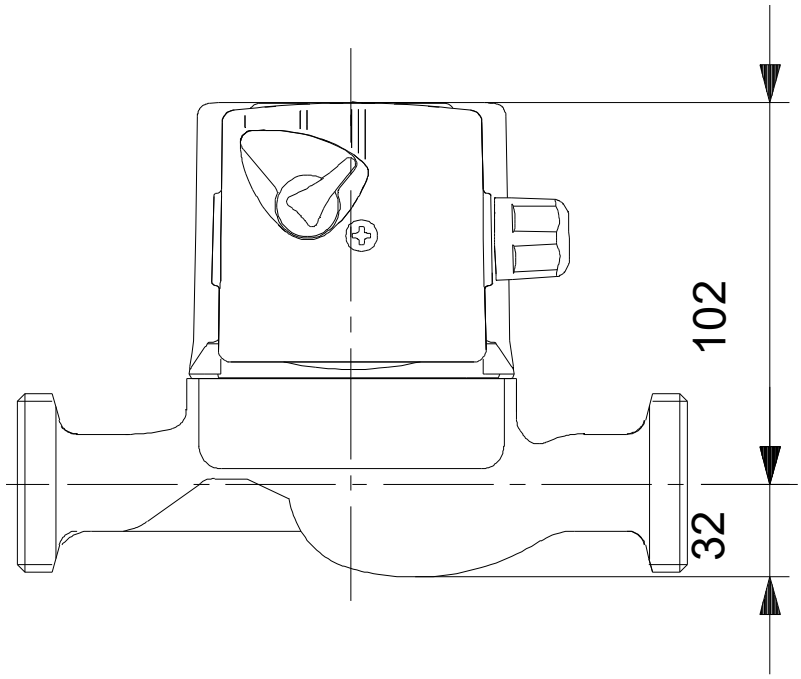

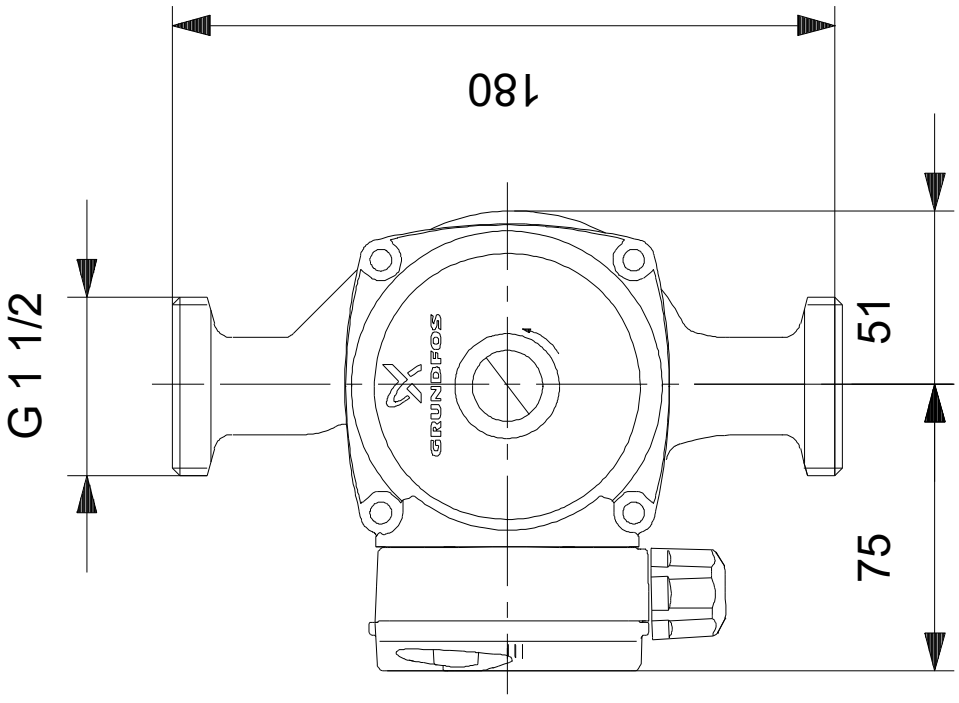


Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.

Company name:
Created by:
Phone:

Date: 13/10/2026

On request UPS 25-50 180 50 Hz

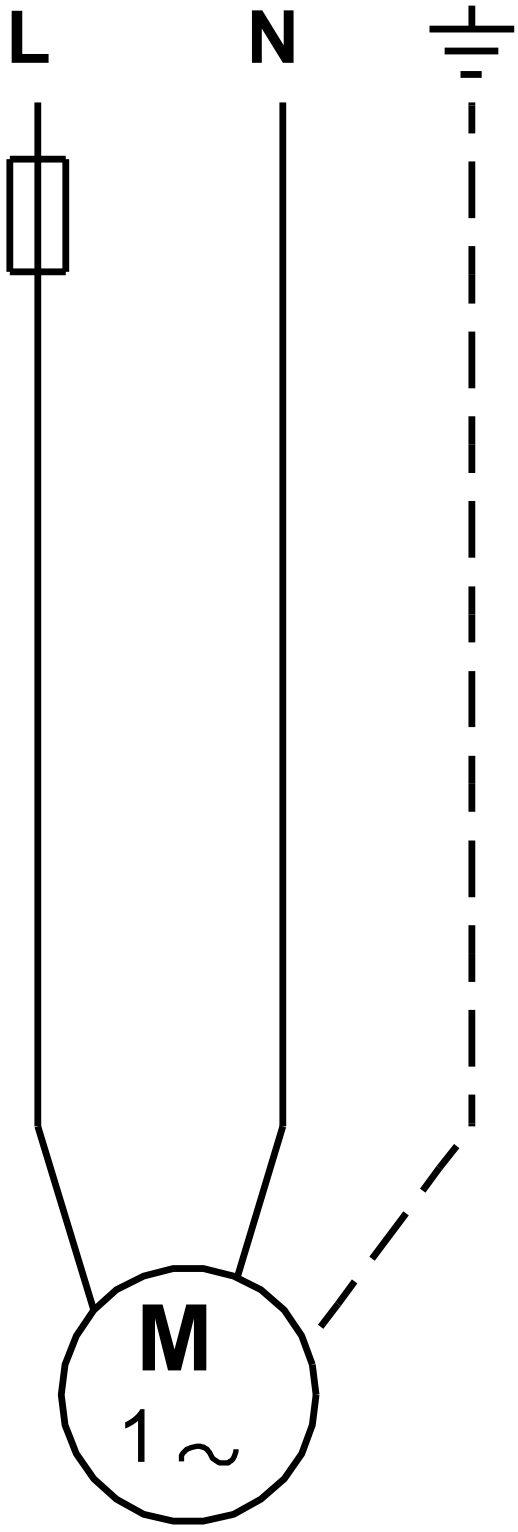

Note! All units are in [mm] unless others are stated.

GRUNDFOS

Company name:
Created by:
Phone:

Date: 13/10/2026

Order Data:

Position	Your pos.	Product name	Amount	Product No	Total
		UPS 25-50 180	1	On request	