



SAF User Documentation : Physical Interface Definition Viewpoint

Domain	Aspect	Maturity
Physical	Interface	 under construction

Example

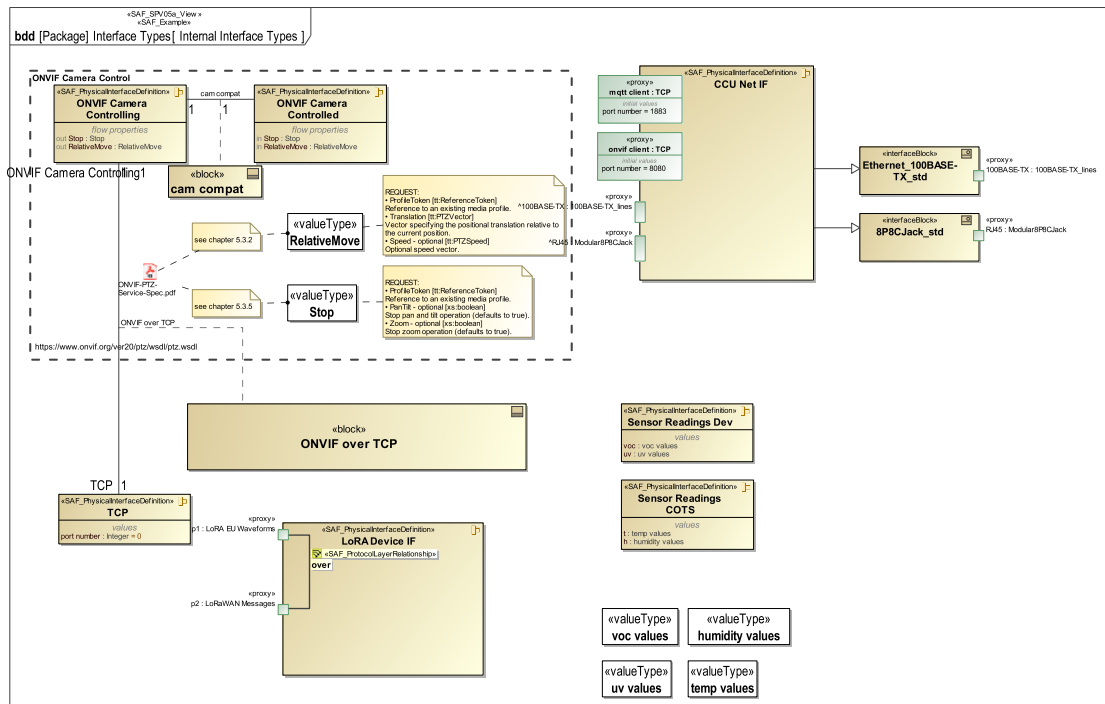

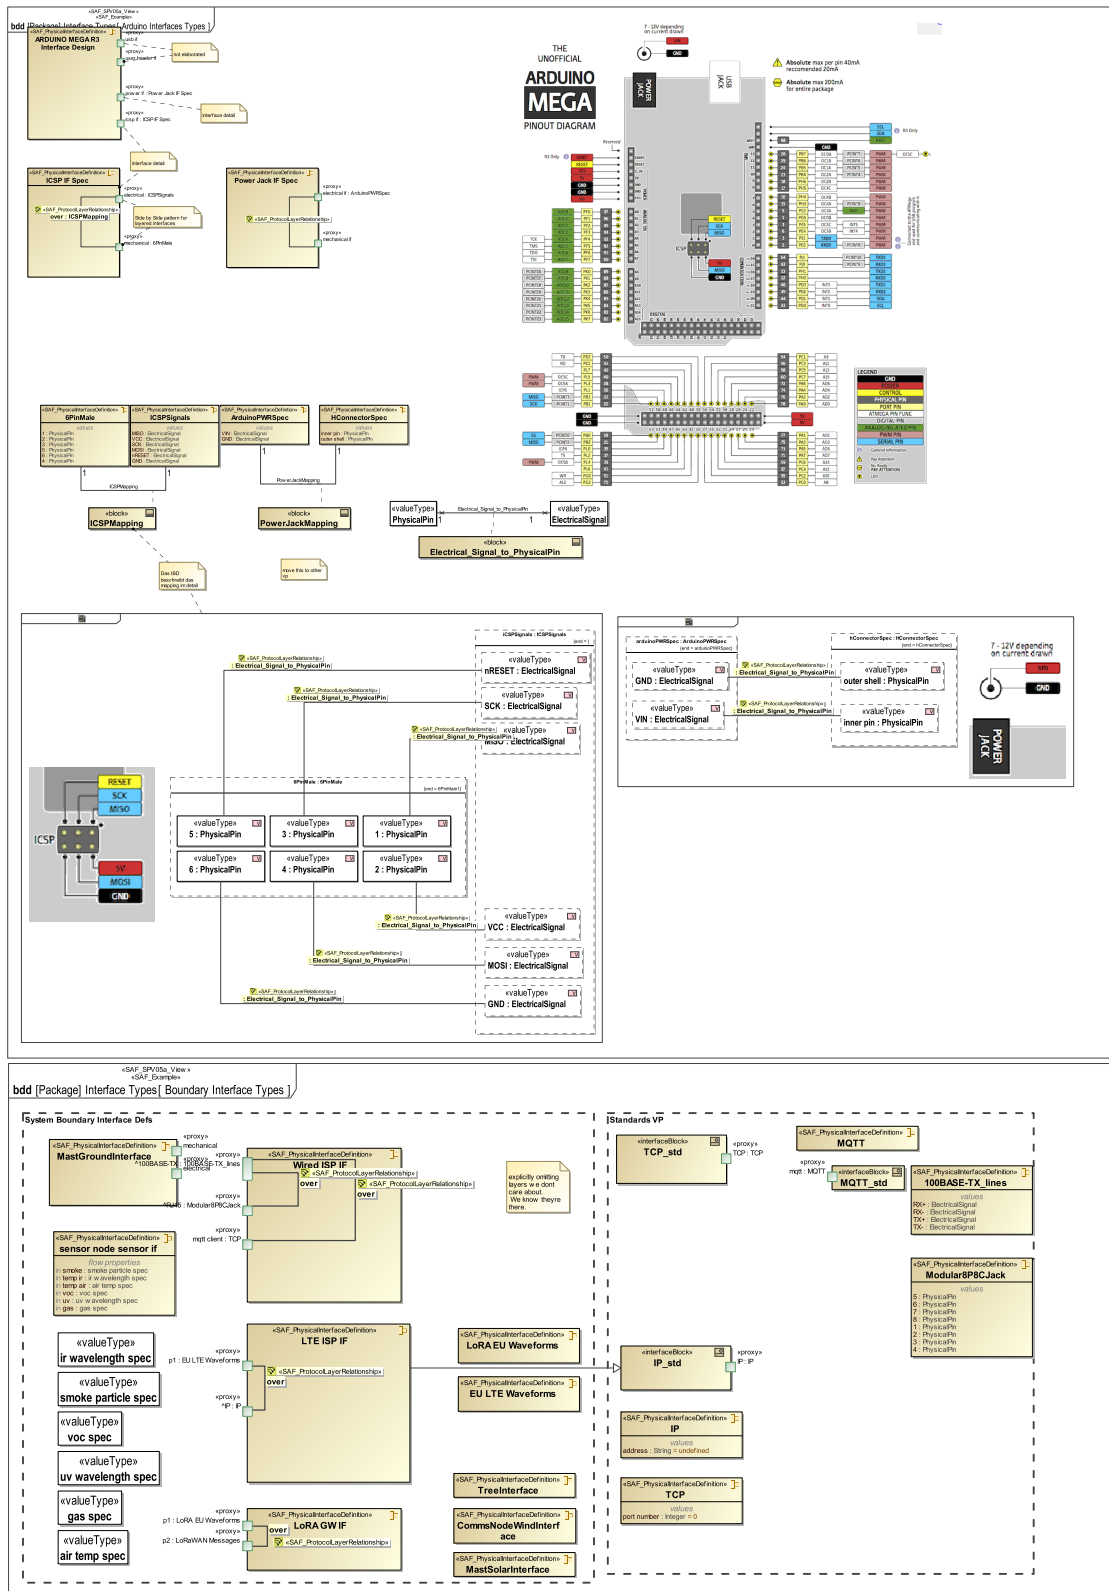

contributes to the System Interface definition.

It also supports the "Interface Management" method of the INCOSE SYSTEMS ENGINEERING HANDBOOK 2023 [§ 3.2.4].

Presentation

A block definition diagram (BDD) featuring Physical Interface blocks with ports and flow properties.

Compatibility between Physical Interface blocks is expressed by associations and association blocks.

Physical Interface blocks may be specialisations of others (use of Generalisation). Note: When ports are used these shall be proxy ports and be typed by interface blocks.

A tabular format listing Physical Interface blocks, their ports, and flow properties.

Stakeholder

- [Hardware Developer](#)
- [Safety Expert](#)
- [Security Expert](#)
- [Software Developer](#)
- [System Architect](#)

Concern

- Which design level data / energy / material definitions have to be known by the SOI and used by the SOI?

Profile Model Reference

The following Stereotypes / Model Elements are used in the Viewpoint:

- FlowProperty [SysML Profile]
- FlowProperty contained in SAF_PhysicalInterfaceDefinition
- ProxyPort [SysML Profile]
- ProxyPort typed by SAF_PhysicalInterfaceDefinition
- SAF_PhysicalInterfaceDefinition contained in ProxyPort
- [SAF_PhysicalExchangeType](#)
- [SAF_PhysicalInterfaceDefinition](#)
- [SAF_ProtocolLayerRelationship](#)
- [SAF_SPV05a_View](#)

Input from other Viewpoints

Required Viewpoints

none

Recommended Viewpoints

none