

INCH-POUND

MIL-STD-6016B

1 August 2002

Superseding

MIL-STD-6016A

30 April 1999

DEPARTMENT OF DEFENSE INTERFACE STANDARD

TACTICAL DATA LINK (TDL) 16 MESSAGE STANDARD



AMSC N/A

AREA: INST

DISTRIBUTION STATEMENT D: Distribution authorized to DOD and U.S. DOD contractors for administrative or operational use. Other requests for this document shall be forwarded to Defense Information Systems Agency (DISA/IN5). See distribution warning on page iii.

THIS PAGE IS INTENTIONALLY LEFT BLANK

MIL-STD-6016B

DISTRIBUTION WARNING

WARNING - This document contains technical data whose export is restricted by the Arms Export Control Act (Title 22, U.S.C., Sec. 2751 et seq.) or Executive Order 12470. Violations of these export laws are subject to severe criminal penalties. Disseminate in accordance with provisions of DOD Directive 5230.25.

THIS PAGE IS INTENTIONALLY LEFT BLANK

MIL-STD-6016B

FOREWORD

1. This Military Standard is approved and mandatory for use by all Departments and Agencies of the Department of Defense implementing Link 16.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document may be submitted to:

Director,
DISA Interoperability (IN)
Military C2 Standards Division (IN5)
5600 Columbia Pike
Falls Church, VA 22041-2717

THIS PAGE IS INTENTIONALLY LEFT BLANK

TABLE OF CONTENTS

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
1.	SCOPE.....	1-1
1.1	Purpose.....	1-1
1.2	Document Structure.....	1-3
1.3	Background.....	1-5
1.4	Policy.....	1-7
1.5	Concept.....	1-9
1.6	Development of Standards.....	1-11
1.7	Application of Standards.....	1-13
1.8	Configuration Management.....	1-15
1.9	Interface Operating Procedures.....	1-17
2.	APPLICABLE DOCUMENTS.....	2-1
2.1	Military Standard.....	2-1
2.1.1	Department of Defense (DOD) Standards.....	2-1
2.1.2	North Atlantic Treaty Organization (NATO) Standardization Agreement (STANAG).....	2-1
2.2	Other Publications.....	2-2
2.3	Order of Precedence.....	2-2
3.	DEFINITIONS.....	3-1
3.1	Abbreviations and Acronyms.....	3-1
3.2	Terms, Definitions, and Conventions.....	3-5
3.3	JTIDS/MIDS Technical Characteristics.....	3-33
3.3.1	JTIDS/MIDS TDMA Architecture.....	3-33
3.3.1.1	Single-Net Architecture.....	3-34
3.3.1.2	Multinet Architecture.....	3-34
3.3.2	JTIDS/MIDS TDMA Communications Network.....	3-36
3.3.2.1	System Timing and Synchronization.....	3-36
3.3.2.2	Net Entry.....	3-36
3.3.2.3	Coarse Synchronization.....	3-37
3.3.2.4	Fine Synchronization.....	3-37
3.3.3	Transmission Procedures.....	3-40
3.3.3.1	Transmission Structure.....	3-40
3.3.3.2	Transmission Signal Generation.....	3-41
3.3.4	Participation Groups.....	3-49
3.3.4.1	Participation Group Types.....	3-52
3.3.4.2	Time Slot and Net Assignments.....	3-52
3.3.4.3	Message Exchange Protocol.....	3-55
3.3.4.4	Participation Group Protocol.....	3-55
3.3.5	Transmit Modes.....	3-57
3.3.5.1	Normal Mode.....	3-57
3.3.5.2	Polling Mode.....	3-58
3.3.5.3	Radio Silence Mode.....	3-58
3.3.6	Communication Modes.....	3-58
3.3.7	Relay Functions.....	3-59
3.3.7.1	Paired Time Slot Relay.....	3-59
3.3.7.2	Repromulgation Relay.....	3-60
3.3.7.3	Relay Modes.....	3-61
3.3.8	Relative Navigation.....	3-62
3.3.9	Data Messages.....	3-64
3.3.9.1	Data Message Packing Structures Formats.....	3-64
3.3.9.2	Message Types.....	3-66
3.3.9.3	Header Word.....	3-67
3.3.10	Round Trip Timing Message Packing Structure.....	3-67

LIST OF TABLES

<u>Table</u>		<u>Page</u>
3.3-1	Cyclic Code Shift Keying Codewords.....	3-47
3.3-2	Carrier Frequencies (Communication Mode 1).....	3-51
3.3-3	JTIDS/MIDS Network Participation Groups.....	3-53
3.3-4	Time Slot Block Size and Interval.....	3-54
3.3-5	Time Slot Block Assignment Parameters.....	3-56
3.3-6	Header Word Format.....	3-69
3.3-7	Data Message Type Codes.....	3-70
3.3-8	RTT Message Format.....	3-71

LIST OF FIGURES

<u>Figure</u>		<u>Page</u>
3.3-1	JTIDS/MIDS TDMA Architecture.....	3-35
3.3-2	General RTT Algorithm.....	3-39
3.3-3	JTIDS/MIDS TDMA Message Packing Structure.....	3-42
3.3-4	Transmission Signal Generation.....	3-44
3.3-5	JTIDS/MIDS Transmission Symbol Packets.....	3-48
3.3-6	JTIDS/MIDS Waveform (Continuous Phase Shift Modulation)....	3-50
3.3-7	Position Location Using Time-of-Arrival Data.....	3-63

TABLE OF CONTENTS (continued)

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
4.	GENERAL REQUIREMENTS.....	4-1
4.1	General.....	4-1
4.1.1	Message Standard Functional Areas.....	4-1
4.1.2	Description of Interface Units.....	4-7
4.1.3	Track/Address Numbering.....	4-10
4.1.3.1	Track Number Sequence and Use.....	4-10
4.1.3.2	Address Allocation.....	4-13
4.1.3.3	Track Number Allocation.....	4-13
4.1.3.4	Address Assignment.....	4-14
4.1.3.5	Track Number Assignment.....	4-14
4.1.3.6	Track Number Accountability.....	4-15
4.1.3.7	Resolution of Duplicate Track Number.....	4-16
4.1.4	Data Registration	4-16
4.1.4.1	Data Registration Error Sources.....	4-16
4.1.4.2	Data Registration Monitoring and Adjustment Procedures....	4-21
4.1.5	Identification of Data Source.....	4-36
4.1.6	Special Processing.....	4-36
4.1.6.1	Data Constraints.....	4-36
4.1.6.2	Forwarding of Data Protected by the SPI.....	4-37
4.1.6.3	Security Filtering.....	4-37
4.1.6.4	Change of Reporting Responsibility for a SPI Track.....	4-37
4.1.6.5	Special Processing of EW Data.....	4-37
4.1.7	Receipt/Compliance.....	4-38
4.1.7.1	Original Message.....	4-38
4.1.7.2	Machine Receipt.....	4-38
4.1.7.3	Cannot Process Response.....	4-39
4.1.7.4	System Component Response.....	4-50
4.1.7.5	Retransmission of Original Messages.....	4-50

TABLE OF CONTENTS (continued)

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
4.1.7.6	Retransmission of Response Messages.....	4-50
4.1.7.7	Relay of Receipt/Compliance Messages.....	4-51
4.1.7.8	Suppression of Redundant Original Messages or Response Messages.....	4-51
4.2	System Information Exchange and Network Management.....	4-53
4.2.1	The Network Management Process.....	4-53
4.2.1.1	Network Structure Design.....	4-54
4.2.1.2	Resource Allocation.....	4-57
4.2.1.3	Network Initialization and Maintenance.....	4-62
4.2.2	Planning and Executing Network Management.....	4-65
4.2.2.1	Planning for Network Management.....	4-65
4.2.2.2	Executing Network Management.....	4-67
4.2.3	Establishment of Participation Groups.....	4-68
4.2.3.1	Network Participation Groups and Needline Participation Groups	4-68
4.2.3.2	Information Exchange Requirements.....	4-70
4.2.3.3	Minimum Implementation.....	4-71
4.2.3.4	Response Time.....	4-71
4.2.3.5	Throughput.....	4-72
4.2.3.6	Rate Matching Requirements.....	4-73
4.2.3.7	Transmit Access Modes.....	4-74
4.2.3.8	Participation Groups on Multinets.....	4-78
4.2.3.9	Messages Used in Assigning Participation Groups.....	4-79
4.2.3.10	Network Participation Groups Description.....	4-79
4.2.4	Capacity Constraints.....	4-88
4.2.4.1	General Capacity Constraints.....	4-88
4.2.5	Relay Control.....	4-94
4.2.5.1	Paired Slot Relay Mode.....	4-94
4.2.5.2	Repromulgation Relay Mode.....	4-96
4.2.5.3	Addressed Relay.....	4-97
4.2.5.4	Messages Used in Support of the Relay Methods.....	4-101
4.2.6	Network Initialization, Entry, Maintenance, and Exit.....	4-101
4.2.6.1	JTIDS/MIDS Unit Terminal Initialization.....	4-104
4.2.6.2	Network Entry.....	4-106
4.2.6.3	Network Maintenance.....	4-112
4.2.6.4	Messages Used in Support of Network Initialization, Entry, Maintenance, and Exit.....	4-120
4.2.6.5	Terminal Testing.....	4-121
4.2.7	Cryptographic Network Description, Operation, and Compromise	4-121
4.2.7.1	Cryptonet Fundamentals.....	4-121
4.2.7.2	Cryptonet Operation.....	4-123
4.2.7.3	Cryptonet Compromise.....	4-124
4.2.7.4	Over-the-Air Rekeying.....	4-125
4.3	Precise Participant Location and Identification.....	4-129
4.3.1	Unit Participation Status on Link 16.....	4-129
4.3.2	Participant Identification.....	4-129
4.3.2.1	Environment/Category of an Interface Unit.....	4-130
4.3.2.2	Classification of an Interface Unit.....	4-130
4.3.2.3	Type of Indirect Interface Unit.....	4-130
4.3.2.4	Transponder Data.....	4-131
4.3.2.5	Strength of an Interface Unit.....	4-131
4.3.2.6	Exercise Indicator.....	4-131
4.3.3	Participant Location.....	4-132
4.3.3.1	PPLI Reporting by JUs.....	4-132
4.3.3.2	PPLI Reporting of Forwarded IUS.....	4-133
4.3.4	Relative Navigation.....	4-133

MIL-STD-6016B

4.3.4.1	Organization.....	4-134
TABLE OF CONTENTS (continued)		

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
4.3.4.2	Capacity.....	4-136
4.3.4.3	Position Accuracy.....	4-136
4.3.4.4	Input Requirements.....	4-138
4.3.4.5	Grid Acquisition and Convergence.....	4-138
4.3.4.6	Geodetic Reference.....	4-138
4.3.4.7	Functional Organization.....	4-138
4.3.4.8	Fine Synchronization.....	4-139
4.3.4.9	Source Selection and Quality Field Values.....	4-140
4.3.4.10	Relative Navigation Correction to Host System.....	4-145
4.4	Surveillance.....	4-147
4.4.1	Surveillance Data.....	4-147
4.4.2	General Rules and Conventions.....	4-149
4.4.2.1	Identity.....	4-150
4.4.2.2	Reporting Responsibility.....	4-152
4.4.2.3	Simulated Tracks.....	4-155
4.4.2.4	Special Processing and Handling of Surveillance Data.....	4-156
4.4.2.5	Track Alerts.....	4-156
4.4.2.6	Purging.....	4-156
4.4.2.7	Rules for "No Statement" and "Reset to No Statement" Values.....	4-156
4.4.2.8	Track Number Continuity.....	4-157
4.4.3	Point Surveillance Data.....	4-157
4.4.3.1	Point, Line, and Area Reporting.....	4-158
4.4.3.2	Reporting Responsibility for Points, Lines, and Areas.....	4-165
4.4.3.3	Data Update Requests for Points, Lines, and Areas.....	4-166
4.4.3.4	Track Alerts for Points, Lines, and Areas.....	4-166
4.4.3.5	Reporting Transponder Data on Points.....	4-166
4.4.3.6	Termination of a Point, Line, or Area.....	4-166
4.4.3.7	Purging of Reference Points, Lines, and Areas and Land (Ground) Points	4-167
4.4.3.8	Purging of Emergency Points.....	4-167
4.4.3.9	Time.....	4-167
4.4.3.10	Exercise Indicator in the Reference Point Message.....	4-168
4.4.3.11	Periodic Report Indicator for Points.....	4-168
4.4.4	Air, Surface (Maritime), and Land (Ground) Track Surveillance	4-168
4.4.4.1	Track Reporting Criteria.....	4-170
4.4.4.2	Track Reporting.....	4-170
4.4.4.3	Common Tracking.....	4-171
4.4.4.4	Positional Data.....	4-187
4.4.4.5	Variance and Time Stamp on Needline PGs.....	4-187
4.4.4.6	Velocity.....	4-189
4.4.4.7	Identity Data.....	4-189
4.4.4.8	Strength.....	4-190
4.4.4.9	IFF/SIF Data Exchange.....	4-190
4.4.4.10	Track Quality.....	4-194
4.4.4.11	Variances and Covariances.....	4-195
4.4.4.12	Variable Track Quality.....	4-196
4.4.4.13	Nonreal-Time Reports.....	4-197
4.4.4.14	Reporting Responsibility.....	4-197
4.4.4.15	Information Difference Recognition and Resolution.....	4-198
4.4.4.16	Termination of Air, Surface (Maritime), and Land (Ground) Track Data	4-199
4.4.4.17	Minimum Wait Before Transmitting Tracks.....	4-200
4.4.5	Subsurface (Maritime) Surveillance.....	4-200
4.4.5.1	Track Reporting Criteria.....	4-200

MIL-STD-6016B

4.4.5.2	Subsurface (Maritime) Surveillance Reporting	4-201
4.4.5.3	Track Association.....	4-205
TABLE OF CONTENTS (continued)		

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
4.4.5.4	Positional Data.....	4-206
4.4.5.5	Velocity.....	4-206
4.4.5.6	Identity Data.....	4-206
4.4.5.7	Discrete Identifier Code (Special).....	4-206
4.4.5.8	Track Quality.....	4-206
4.4.5.9	Time.....	4-206
4.4.5.10	Subsurface Track Reporting Responsibility.....	4-207
4.4.5.11	Reporting Inactive Interface Units as Subsurface Surveillance Tracks	4-207
4.4.5.12	Information Difference Recognition and Resolution.....	4-208
4.4.5.13	Termination of Subsurface Track Data.....	4-208
4.4.6	Space and Ballistic Missile Surveillance.....	4-208
4.4.6.1	Ballistic Missile Track/Point Reporting Criteria.....	4-210
4.4.6.2	Ballistic Missile Track/Point Reporting.....	4-210
4.4.6.3	Ballistic Missile Launch Point Reporting.....	4-211
4.4.6.4	Ballistic Missile Impact Point Reporting.....	4-212
4.4.6.5	Ballistic Missile Launch/Impact Point Error Reporting.....	4-212
4.4.6.6	Ballistic Missile Track Correlation.....	4-213
4.4.6.7	Ballistic Missile Positional Data.....	4-214
4.4.6.8	Ballistic Missile Velocity.....	4-214
4.4.6.9	Ballistic Missile Covariance Data.....	4-214
4.4.6.10	Ballistic Missile Identity Data.....	4-224
4.4.6.11	Ballistic Missile Track Quality.....	4-224
4.4.6.12	Lost Track Indicator.....	4-225
4.4.6.13	Time for Ballistic Missile Tracks.....	4-225
4.4.6.14	Nonreal-Time Ballistic Missile Track Report.....	4-226
4.4.6.15	Ballistic Missile Reporting Responsibility.....	4-226
4.4.6.16	Ballistic Missile Information Difference Recognition and Resolution.....	4-227
4.4.6.17	Termination of Ballistic Missile Track Data.....	4-228
4.4.7	Electronic Warfare Surveillance.....	4-228
4.4.7.1	Electronic Warfare Reporting.....	4-229
4.4.7.2	Electronic Warfare Product Information Reporting Responsibility.....	4-231
4.4.7.3	Time Data.....	4-232
4.4.7.4	Electronic Warfare Information Management.....	4-232
4.4.7.5	Electronic Warfare Product Information Correlation.....	4-232
4.4.7.6	Termination of Electronic Warfare Surveillance Data.....	4-233
4.4.7.7	Bearing Origin.....	4-233
4.4.8	NonC ² JU Use of Surveillance NPG	4-233
4.5	Electronic Warfare.....	4-235
4.5.1	Definitions.....	4-235
4.5.1.1	Electronic Warfare.....	4-235
4.5.1.2	Electronic Warfare Surveillance (EWS).....	4-235
4.5.1.3	Nonelectronic Warfare Command and Control JTIDS/MIDS Units (NonEW C ²)	4-236
4.5.1.4	Command and Control Electronic Warfare JTIDS/MIDS Units...	4-236
4.5.1.5	Noncommand and Control EW JTIDS/MIDS Units.....	4-236
4.5.2	Electronic Warfare Coordination Procedures.....	4-236
4.5.2.1	Electronic Warfare Control Information Exchange Requirements.....	4-237
4.5.3	Electronic Warfare Control/Coordination Message Description.....	4-237
4.5.3.1	Electronic Warfare Control/Coordination Message.....	4-237
4.5.3.2	Parametric Information Message.....	4-237

4.5.3.3	Electronic Warfare Control/Coordination Procedures.....	4-241
4.5.4	Termination of Electronic Warfare Parametric Data.....	4-255
4.6	Amplification.....	4-257

TABLE OF CONTENTS (continued)

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
4.6.1	Amplification Information.....	4-257
4.6.2	Reset.....	4-258
4.6.3	Filtering of Amplification Data.....	4-258
4.6.4	Termination of Amplification Data.....	4-259
4.6.5	Response Indicator.....	4-259
4.6.6	Amplification of J6.0 Amplification Requirements.....	4-259
4.6.6.1	Track Numbers.....	4-259
4.6.6.2	Activity and Activity Amplification Index (AAI).....	4-259
4.6.6.3	Local Discrete Identifier (LDI).....	4-260
4.6.7	Conflicts Between J6.0 Data and Other Data.....	4-260
4.6.8	Processing Amplification Data from Multiple Data Sources..	4-261
4.7	Information Management.....	4-263
4.7.1	Track Management.....	4-263
4.7.1.1	Drop Track Report.....	4-264
4.7.1.2	Identity (ID) and Environment/Category (E/C) Difference Report.....	4-264
4.7.1.3	Change Data Order.....	4-272
4.7.1.4	Alert Indicators.....	4-274
4.7.1.5	Strength Change.....	4-280
4.7.1.6	Exercise Status Order.....	4-281
4.7.1.7	Exercise Indicator.....	4-282
4.7.2	Data Update Request.....	4-282
4.7.2.1	Data Update Request by Track Number.....	4-282
4.7.2.2	Data Update Request by Request Indicator Values.....	4-284
4.7.2.3	Response Indicators.....	4-284
4.7.3	Resolution of Air and Surface Track Dual Designations....	4-287
4.7.3.1	Rules for a C ² JU Originating a J7.2 Correlation Message..	4-288
4.7.3.2	Rules for C ² JUs Receiving a Correlation Message	4-288
4.7.4	Pointers.....	4-291
4.7.5	Track Identifier Management.....	4-291
4.7.6	IFF/SIF Data Management and Special Code Reporting.....	4-292
4.7.6.1	Unique Mode II Code Protection.....	4-293
4.7.6.2	Clearing IFF/SIF Data.....	4-293
4.7.6.3	IFF/SIF Difference Resolution.....	4-294
4.7.6.4	IFF/SIF Update Requests.....	4-297
4.7.6.5	Special Code Reporting.....	4-297
4.7.7	Filters.....	4-298
4.7.7.1	Data Filter Types.....	4-299
4.7.7.2	Environment/Category Filters.....	4-301
4.7.7.3	Identity Filters.....	4-301
4.7.7.4	Geographic Filters.....	4-301
4.7.7.5	Special Processing Filters.....	4-306
4.7.7.6	Simulation Filters.....	4-306
4.7.7.7	Data Filter Rules.....	4-306
4.7.7.8	Filter Message.....	4-307
4.7.8	Data Association.....	4-311
4.7.8.1	Terminating Association.....	4-312
4.7.8.2	Purging Association Data.....	4-312
4.7.9	Unit Designator Management.....	4-312
4.7.10	Mission Correlator Management.....	4-312
4.7.10.1	Mission Correlator Change Field.....	4-312
4.7.10.2	Use of the J8.1 Mission Correlator Fields.....	4-313
4.8	Antisubmarine Warfare.....	4-321

4.8.1	Definitions.....	4-322
4.8.1.1	Antisubmarine Warfare (ASW).....	4-322
4.8.1.2	Subsurface Surveillance.....	4-322

TABLE OF CONTENTS (continued)

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
4.8.1.3	Nonantisubmarine Warfare Command and Control JTIDS/MIDS Units.....	4-322
4.8.1.4	Command and Control JTIDS/MIDS Units (Antisubmarine Warfare Node)	4-322
4.8.1.5	Noncommand and Control JTIDS/MIDS Unit (Antisubmarine Warfare Asset).....	4-322
4.8.2	Antisubmarine Warfare Message Descriptions.....	4-322
4.8.3	Antisubmarine Warfare Applications.....	4-323
4.8.4	ASW Mission Data.....	4-325
4.8.4.1	ASW Points, Lines, and Areas.....	4-325
4.8.4.2	Acoustic Bearing/Range Message.....	4-326
4.8.5	Exercise Indicator.....	4-326
4.9	Threat Warning.....	4-327
4.9.1	Threat Warning Procedures.....	4-327
4.9.2	Threat Warning Addressing.....	4-327
4.9.3	Threat Warning Message Contents.....	4-328
4.9.4	Timelines.....	4-329
4.9.5	Relating Threat Warning Information`.....	4-329
4.10	Mission Management.....	4-331
4.10.1	Mission Management Information Exchange Requirements.....	4-331
4.10.1.1	Mission Correlator.....	4-331
4.10.2	Mission Management Message Descriptions.....	4-332
4.10.2.1	Immediate Tasking Message.....	4-332
4.10.2.2	Mission Results Message.....	4-333
4.10.2.3	Airfield Status Message.....	4-333
4.10.2.4	Fire Support Coordination Measures Message.....	4-333
4.10.2.5	Immediate Request for Support Message.....	4-333
4.10.2.6	Weather Observation/Forecast Message.....	4-333
4.10.2.7	Severe Weather Report Message.....	4-333
4.10.2.8	Atmospheric Weather Report Message.....	4-334
4.10.3	Mission Management Procedures and Protocols.....	4-334
4.11	Weapons Coordination and Management.....	4-335
4.11.1	Weapons Coordination and Management Information Exchange Requirements.....	4-335
4.11.2	Weapons Coordination and Management Message Descriptions	4-335
4.11.2.1	Command Message	4-336
4.11.2.2	Engagement Coordination Message	4-336
4.11.2.3	Engagement Status Message	4-337
4.11.2.4	Handover Message.....	4-337
4.11.2.5	Controlling Unit Report Message	4-338
4.11.2.6	Pairing Message	4-338
4.11.2.7	Interrelationships Between J9.0, J10.2, J10.6, J12.0, and J12.6 Messages	4-338
4.11.3	Weapons Coordination and Management Procedures and Protocols	4-346
4.11.3.1	Command Procedures	4-346
4.11.3.2	Procedures for Control of NonC ² Units	4-349
4.11.3.3	Reporting of Status	4-354
4.11.3.4	Engagement Coordination Procedures.....	4-359
4.11.3.5	Theater Ballistic Missile Defense Procedures.....	4-361
4.11.3.6	Electronic Warfare Coordination Procedures.....	4-362
4.12	Control.....	4-363

MIL-STD-6016B

4.12.1	Aircraft Control.....	4-363
4.12.1.1	Aircraft Control Information Exchange Requirements.....	4-364
4.12.1.2	Noncommand and Control JTIDS/MIDS Unit Control Message Descriptions	4-364
4.12.1.3	Aircraft Control Procedures and Protocols.....	4-369
TABLE OF CONTENTS (continued)		

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
4.12.1.4	Conditional Radio Silence Air Control Procedures.....	4-406
4.12.1.5	Weather Over Target Message.....	4-407

LIST OF TABLES

Table		Page
4.1-1	JTIDS/MIDS User Technical Functions Versus Warfare Tasks....	4-3
4.1-2	JTIDS/MIDS Unit Response Time.....	4-4
4.1-3	JTIDS/MIDS Unit Response Time and Update Rate by Message....	4-5
4.1-4	JTIDS/MIDS Track Number Sequence and Use.....	4-12
4.1-5	Summary of Data Registration Sources.....	4-18
4.1-6	Maximum Monitor Intervals.....	4-35
4.1-7	Receipt/Compliance	4-40
4.1-8	Applicability of Receipt/Compliance Values for Transmission of Original Message and Receipt of Original Message	4-42
4.1-8.1	Applicability of Receipt/Compliance Values for Transmission of Response to Original Message and Receipt of Response to Original Message.....	4-43
4.1-9	Message Transfer Sequence for Receipt/Compliance	4-44
4.2-1	Message to Network PG Applicability Table.....	4-81
4.2-2	Time Slot Block Assignment Capabilities	4-90
4.4-1	Summary of Correlation Tests.....	4-174
4.4-2	Positional Errors Represented by TQ.....	4-177
4.4-3	Correlation Windows (Value of D in dm) for Default Parameter Values.....	4-178
4.4-4	Values of R for PPLI.....	4-179
4.4-5	Correlation Windows (Value of D in dm) when Remote Track is a JU for Default Parameter Values.....	4-179
4.4-6	IFF/SIF Message/Function Summary.....	4-192
4.4-7	Target Position Quality (TPQ) to TQ Translation.....	4-195
4.5-1	Electronic Warfare Control/Coordination Information Requirements.....	4-239
4.7-1	Environment/Category Difference Resolution and Track Number Continuity on Change of Entity Type.....	4-267
4.7-2	Identity Difference Resolution.....	4-271
4.7-3	Alert Indicators.....	4-275
4.7-4	Response Messages to Request Indicator Values.....	4-286
4.7-5	IFF/SIF Difference Resolution Matrix	4-295
4.7-6	Geographic Filter Description.....	4-303
4.7-7	Transmission Filter Interpretation for Tracks.....	4-314
4.7-8	Transmission Filter Interpretation for Reference Points...	4-317
4.7-9	Transmission Filter Interpretation for EW Products.....	4-318
4.8-1	Summary of Messages Supporting Antisubmarine Warfare	4-323
4.10-1	Mission Management Information Exchange Requirements (Preliminary).....	4-332
4.11-1	Weapons Coordination and Management Information Exchange Requirements.....	4-336
4.11-2	Flow Diagram of Message Sequences for Tables 4.11-3, 4, and 5.....	4-340
4.11-3	J9.0, J12.0, J10.2, and J10.6 Action Value Relationships..	4-341
4.11-4	Mission Assignment Discretes not Corresponding to J9.0 Messages.....	4-343

MIL-STD-6016B

4.11-5	J10.2 WES Resulting from Reception of a J12.6 Message.....	4-345
4.12-1	J2.2 Platform Activity to be Transmitted after Transmitting a J12.0 WILCO.....	4-387
4.12-2	TPQ to TQ Translation.....	4-393
4.12-3	J12.6 Engagement Status Values Relationships.....	4-395

LIST OF FIGURES

<u>Figure</u>		<u>Page</u>
4.1-1	Representative FJU Link Configurations.....	4-9
4.1-2	19-bit Track Number Composition and Coding.....	4-11
4.1-3	Simplified Diagram of Data Registration Process.....	4-23
4.1-4	Description of Sensor and IU Coordinate Systems.....	4-24
4.1-5	Description of Geodetic Coordinate System.....	4-25
4.1-6	Mathematical Equations Using Orthogonal Projections.....	4-30
4.2-1	General Data Flow Routing (Source Perspective).....	4-102
4.2-2	General Data Flow Routing (Relay/Destination Perspective).....	4-103
4.2-3	Flow Diagram of Network Entry.....	4-108
4.2-4	Flow Diagram of Network Participation Status Change to Active Status.....	4-115
4.2-5	Flow Diagram of Network Participation Status Change to Limited Status.....	4-118
4.3-1	Position Location Using Time-of-Arrival Data.....	4-137
4.7-1	Multisegmented Line Filter	4-305

TABLE OF CONTENTS (continued)

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
5.	DETAILED REQUIREMENTS FOR LINK 16.....	5-1
5.1	Description of J-series Messages.....	5-1
5.2	Header Word.....	5-5
5.3	Message Construction.....	5-13
5.3.1	Word Construction.....	5-13
5.3.1.1	General.....	5-13
5.4	Message and Word Numbering Convention.....	5-19
5.4.1	Message.....	5-19
5.4.2	Basic Message.....	5-19
5.4.3	Initial Word.....	5-19
5.4.4	Extension Word.....	5-19
5.4.5	Continuation Word.....	5-20
5.4.6	Link 16 Message Labeling Scheme.....	5-20
5.5	Message Length Indicator Field and Message Length.....	5-23
5.5.1	Message Length Indicator Field.....	5-23
5.5.2	Message Length.....	5-23
5.6	Coding Conventions.....	5-25
5.6.1	Position Information.....	5-25
5.6.2	Vertical Position Measurement.....	5-25
5.6.3	Velocity Information.....	5-25
5.6.4	Course/Bearing Information.....	5-25
5.6.5	Time Information.....	5-26
5.6.6	Data Field Coding.....	5-26
5.6.7	Spare Fields.....	5-26
5.6.8	Negative Values.....	5-26
5.6.9	Protective Coding.....	5-27
5.6.10	Fields Not Implemented.....	5-27
5.6.11	No Statement/No Data.....	5-27
5.7	Message Description Documentation.....	5-29

MIL-STD-6016B

5.7.1	Transmit/Receive Rules.....	5-34
5.7.1.1	Redundant Transmission Example.....	5-35
5.8	Message Priorities.....	5-39
5.8.1	Special Time Slot Utilization.....	5-39
5.8.2	Link 16 Message Priority Scheme.....	5-40
5.9	Host Initialization Variable Parameters.....	5-43
5.10	J-Series Message and Word Descriptions.....	5-43

LIST OF TABLES

<u>Table</u>		<u>Page</u>
5.4-1	JTIDS/MIDS Messages.....	5-21
5.7-1	List of Link 16 Messages.....	5-31
5.7-2	Time Slot Block Assignment/Recurrence Rate Number.....	5-37

LIST OF FIGURES

<u>Figure</u>		<u>Page</u>
5.2-1	J Series Header Word Format.....	5-6
5.3-1	J Series Initial Word Format.....	5-15
5.3-2	J Series Extension Word Format.....	5-17
5.3-3	J Series Continuation Word Format.....	5-18

SECTION 5, PART 1, J-SERIES MESSAGE DESCRIPTIONS

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
J0	System Information Exchange and Network Management Word	
	Applicability Table	5.1-1
J0.0	Message Summary.....	5.1-3
J0.1	Message Summary.....	5.1-19
J0.2	Message Summary.....	5.1-31
J0.3	Message Summary.....	5.1-39
J0.4	Message Summary.....	5.1-69
J0.5	Message Summary.....	5.1-97
J0.6	Message Summary.....	5.1-103
J0.7	Message Summary.....	5.1-139
J1	System Information Exchange and Network Management Word	
	Applicability Table	5.1-159
J1.0	Message Summary.....	5.1-161
J1.1	Message Summary.....	5.1-171
J1.2	Message Summary.....	5.1-191
J1.3	Message Summary.....	5.1-207
J1.4	Message Summary.....	5.1-225
J1.5	Message Summary.....	5.1-257
J1.6	Message Summary.....	5.1-275
J2	PPLI Word Applicability Table.....	5.1-291
J2.0	Message Summary.....	5.1-293
J2.2	Message Summary.....	5.1-311
J2.3	Message Summary.....	5.1-353
J2.4	Message Summary.....	5.1-385
J2.5	Message Summary.....	5.1-419
J2.6	Message Summary.....	5.1-457
J3	Surveillance Word Applicability Table.....	5.1-491
J3.0	Message Summary.....	5.1-493
J3.1	Message Summary.....	5.1-563
J3.2	Message Summary.....	5.1-585

MIL-STD-6016B

J3.3	Message Summary.....	5.1-643
J3.4	Message Summary.....	5.1-677
J3.5	Message Summary.....	5.1-711
J3.6	Message Summary.....	5.1-769
J3.7	Message Summary.....	5.1-817

TABLE OF CONTENTS (continued)

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
J5	Antisubmarine Warfare Word Applicability Table.....	5.1-947
J5.4	Message Summary.....	5.1-949
J6	Amplification Word Applicability Table.....	5.1-981
J6.0	Message Summary.....	5.1-983

LIST OF TABLES

<u>Table</u>	<u>Page</u>
J3-2	Setting and Interpretation of Altitude for Reference Points, Lines and Areas.....
J3-3	Required Word Sequences for Points, Lines and Areas.....

SECTION 5, PART 2, J-SERIES MESSAGE DESCRIPTIONS

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
J7	Information Management Word Applicability Table.....	5.2-1
J7.0	Message Summary.....	5.2-3
J7.1	Message Summary.....	5.2-117
J7.2	Message Summary.....	5.2-135
J7.3	Message Summary.....	5.2-149
J7.4	Message Summary.....	5.2-167
J7.5	Message Summary.....	5.2-183
J7.6	Message Summary.....	5.2-197
J7.7	Message Summary.....	5.2-229
J8	Information Management Word Applicability Table.....	5.2-243
J8.0	Message Summary.....	5.2-245
J8.1	Message Summary.....	5.2-263
J9	Weapons Coordination and Management Word Applicability Table..	5.2-269
J9.0	Message Summary.....	5.2-271
J9.1	Message Summary.....	5.2-319
J10	Weapons Coordination and Management Word Applicability Table..	5.2-335
J10.2	Message Summary.....	5.2-337
J10.3	Message Summary.....	5.2-369
J10.5	Message Summary.....	5.2-399
J10.6	Message Summary.....	5.2-409
J12	Control Word Applicability Table.....	5.2-423
J12.0	Message Summary.....	5.2-425
J12.1	Message Summary.....	5.2-567
J12.2	Message Summary.....	5.2-585
J12.3	Message Summary.....	5.2-593

MIL-STD-6016B

J12.4	Message Summary.....	5.2-605
J12.5	Message Summary.....	5.2-625
J12.6	Message Summary.....	5.2-643
J12.7	Message Summary.....	5.2-973

LIST OF TABLES

<u>Table</u>		<u>Page</u>
J7-2	Action Field Values.....	5.2-2
J7-3	Required Word Sequences for Filter Management.....	5.2-200
J7-4	Setting and Interpretation of Altitude for Filter Management.....	5.2-200
J9-2	Required Word Sequences and Receipt/Compliance Values For Command Values.....	5.2-273
J9-3	Transmit/Receive Rules for Engagement Coordination Action Values.....	5.2-321
J10-2	Contiguous Engagement Status Reports.....	5.2-340
J10-3	Initial Transmissions and Update Rates for Engagement Status Messages for Weapon Engagement Status.....	5.2-341
J12-2	Required Word Sequences and Receipt/Compliance Values for Mission Assignment Discrete Values.....	5.2-428
J12-3	Required Word Sequences and Receipt/Compliance Values and Periodic Update Rates for Discrete Values.....	5.2-569
J12-4.1	J12.6 Required Word Sequences, Message Priorities, and Periodic Update Rates for Status Information Discrete Environment/Category = 0, No Statement/Unknown.....	5.2-649
J12-4.2	J12.6 Required Word Sequences, Message Priorities, and Periodic Update Rates for Status Information Discrete Environment/Category = 1, Space.....	5.2-649
J12-4.3	J12.6 Required Word Sequences, Message Priorities, and Periodic Update Rates for Status Information Discrete Environment/Category = 2, Air.....	5.2-650
J12-4.4	J12.6 Required Word Sequences, Message Priorities, and Periodic Update Rates for Status Information Discrete Environment/Category = 3, Surface (Maritime).....	5.2-652
J12-4.5	J12.6 Required Word Sequences, Message Priorities, and Periodic Update Rates for Status Information Discrete Environment/Category = 4, Subsurface (Maritime).....	5.2-654
J12-4.6	J12.6 Required Word Sequences, Message Priorities, and Periodic Update Rates for Status Information Discrete Environment/Category = 5, Land (Ground).....	5.2-655

SECTION 5, PART 3, J-SERIES MESSAGE DESCRIPTIONS

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
J13	Platform and System Status Word Applicability Table.....	5.3-1
J13.0	Message Summary.....	5.3-3
J13.2	Message Summary.....	5.3-33
J13.3	Message Summary.....	5.3-117
J13.4	Message Summary.....	5.3-211

MIL-STD-6016B

J13.5	Message Summary.....	5.3-239
J14	Control Word Applicability Table.....	5.3-269
J14.0	Message Summary.....	5.3-271
J14.2	Message Summary.....	5.3-431
J15	Threat Warning Word Applicability Table.....	5.3-607
J15.0	Message Summary.....	5.3-609

MIL-STD-6016B

TABLE OF CONTENTS (continued)

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
J17	Miscellaneous Word Applicability Table.....	5.3-713
J17.0	Message Summary.....	5.3-715
J28	National Use Word Applicability Table.....	5.3-729
J28.0	Message Summary.....	5.3-731
J28.1	Message Summary.....	5.3-737
J28.2	Message Summary.....	5.3-743
J28.20	Message Summary.....	5.3-749
J28.3	Message Summary.....	5.3-759
J28.4	Message Summary.....	5.3-765
J28.5	Message Summary.....	5.3-771
J28.6	Message Summary.....	5.3-777
J28.7	Message Summary.....	5.3-783
J29	National Use Word Applicability Table.....	5.3-789
J29.0	Message Summary.....	5.3-791
J29.3	Message Summary.....	5.3-797
J29.4	Message Summary.....	5.3-803
J29.5	Message Summary.....	5.3-809
J29.7	Message Summary.....	5.3-815
J30	National Use Word Applicability Table.....	5.3-821
J30.0	Message Summary.....	5.3-823
J30.1	Message Summary.....	5.3-829
J30.2	Message Summary.....	5.3-835
J30.3	Message Summary.....	5.3-841
J30.4	Message Summary.....	5.3-847
J30.5	Message Summary.....	5.3-853
J30.6	Message Summary.....	5.3-859
J30.7	Message Summary.....	5.3-865
J31	Miscellaneous Word Applicability Table.....	5.3-871
J31.0	Message Summary.....	5.3-873
J31.1	Message Summary.....	5.3-899
J31.7	Message Summary.....	5.3-917
RTT	Round-Trip-Timing Word Applicability Table.....	5.3-923
RTT-A	Message Summary.....	5.3-925
RTT-B	Message Summary.....	5.3-935
RTT-REP	Message Summary.....	5.3-945

LIST OF TABLES

<u>Table</u>	<u>Page</u>
J14-2	Required Word Sequences For Example J14.0 Messages Requiring More Than Three Words.....
J14-3	Required Word Sequences and Receipt/Compliance Values for Electronic Warfare Action Values.....
J14-4	Required Word Sequences For Example J14.2 Messages Requiring More Than Three Words.....
J31-2	Required Word Sequences for Action Code, Over-the-Air Rekeying Values.....

TABLE OF CONTENTS (continued)

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
6.	NOTES.....	6-1
6.1	Intended Use	6-1
6.2	Supersession Data	6-1
6.3	Subject Term (Key Word) Listing	6-1
6.4	Interface Change Proposals (ICPs) Included in this Update	6-3

APPENDIX A

MINIMUM IMPLEMENTATION

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
A.1	Scope.....	A-1
A.1.1	General.....	A-1
A.1.2	Applicability.....	A-1
A.2	Applicable Documents.....	A-2
A.3	Definitions.....	A-2
A.4	General Requirements.....	A-2
A.4.1	Functional Minimum Implementation.....	A-3
A.4.2	Related Function Minimum Implementation.....	A-5
A.4.3	Message Minimum Implementation	A-5
A.4.4	Word Minimum Implementation.....	A-6
A.4.5	Data Element Minimum Implementation.....	A-6
A.4.6	Data Item Minimum Implementation.....	A-7
A.4.7	Waiver.....	A-7
A.4.7.1	Initial Operational Capability (IOC).....	A-8
A.4.7.2	Special and Contributing Systems.....	A-8
A.5	Detailed Requirements.....	A-9
A.5.1	Symbol Definitions.....	A-9
A.5.2	Notations.....	A-10
A.5.3	Link 16 Functional Minimum Implementation.....	A-17
A.5.4	Link 16 Related Function Minimum Implementation.....	A-17
A.5.5	Link 16 Message Minimum Implementation.....	A-21
A.5.5.1	Terminal Baseline Message Minimum Implementation.....	A-21
A.5.5.2	Net Control Station Minimum Implementation.....	A-21
A.5.5.3	Network Manager Minimum Implementation.....	A-21
A.5.5.4	Distributed Routing Minimum Implementation.....	A-21
A.5.5.5	Common Message Minimum Implementation for Tactical Data Systems.....	A-22
A.5.5.6	Time Slot Reallocation Message Minimum Implementation.....	A-22
A.5.5.7	C ² JU Message Minimum Implementation by Function	A-22
A.5.5.8	NonC ² JU Message Minimum Implementation by Function	A-22
A.5.6	Link 16 Word, Data Element, and Data Item Minimum Implementation.....	A-23
A.5.6.1	Link 16 Word Minimum Implementation.....	A-37
A.5.6.2	Link 16 Data Element Minimum Implementation.....	A-42
A.5.6.3	Link 16 Data Item Minimum Implementation.....	A-42
A.5.7	Message and Purpose.....	A-43
J0.0	Word, Data Element, and Data Item Minimum Implementation.....	A-57
J0.1	Word, Data Element, and Data Item Minimum Implementation.....	A-59
J0.2	Word, Data Element, and Data Item Minimum Implementation.....	A-60
J0.3	Word, Data Element, and Data Item Minimum Implementation.....	A-61
J0.4	Word, Data Element, and Data Item Minimum Implementation.....	A-63
J0.5	Word, Data Element, and Data Item Minimum Implementation.....	A-65
J0.6	Word, Data Element, and Data Item Minimum Implementation.....	A-67
J0.7	Word, Data Element, and Data Item Minimum Implementation.....	A-69
J1.0	Word, Data Element, and Data Item Minimum Implementation.....	A-71

MIL-STD-6016B

J1.1	Word, Data Element, and Data Item Minimum Implementation.....A-73
J1.2	Word, Data Element, and Data Item Minimum Implementation.....A-77
MINIMUM IMPLEMENTATION	
TABLE OF CONTENTS (continued)	

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
J1.3	Word, Data Element, and Data Item Minimum Implementation.....A-79	
J1.4	Word, Data Element, and Data Item Minimum Implementation.....A-83	
J1.5	Word, Data Element, and Data Item Minimum Implementation.....A-91	
J1.6	Word, Data Element, and Data Item Minimum Implementation.....A-93	
J2.0	Word, Data Element, and Data Item Minimum Implementation.....A-95	
J2.2	Word, Data Element, and Data Item Minimum Implementation.....A-97	
J2.3	Word, Data Element, and Data Item Minimum Implementation.....A-99	
J2.4	Word, Data Element, and Data Item Minimum Implementation.....A-101	
J2.5	Word, Data Element, and Data Item Minimum Implementation.....A-103	
J2.6	Word, Data Element, and Data Item Minimum Implementation.....A-105	
J3.0	Word, Data Element, and Data Item Minimum Implementation.....A-107	
J3.1	Word, Data Element, and Data Item Minimum Implementation.....A-111	
J3.2	Word, Data Element, and Data Item Minimum Implementation.....A-112	
J3.3	Word, Data Element, and Data Item Minimum Implementation.....A-115	
J3.4	Word, Data Element, and Data Item Minimum Implementation.....A-117	
J3.5	Word, Data Element, and Data Item Minimum Implementation.....A-119	
J3.6	Word, Data Element, and Data Item Minimum Implementation.....A-123	
J3.7	Word, Data Element, and Data Item Minimum Implementation.....A-127	
J5.4	Word, Data Element, and Data Item Minimum Implementation.....A-133	
J6.0	Word, Data Element, and Data Item Minimum Implementation.....A-135	
J7.0	Word, Data Element, and Data Item Minimum Implementation.....A-137	
J7.1	Word, Data Element, and Data Item Minimum Implementation.....A-141	
J7.2	Word, Data Element, and Data Item Minimum Implementation.....A-143	
J7.3	Word, Data Element, and Data Item Minimum Implementation.....A-144	
J7.4	Word, Data Element, and Data Item Minimum Implementation.....A-147	
J7.5	Word, Data Element, and Data Item Minimum Implementation.....A-149	
J7.6	Word, Data Element, and Data Item Minimum Implementation.....A-151	
J7.7	Word, Data Element, and Data Item Minimum Implementation.....A-155	
J8.0	Word, Data Element, and Data Item Minimum Implementation.....A-157	
J8.1	Word, Data Element, and Data Item Minimum Implementation.....A-158	
J9.0	Word, Data Element, and Data Item Minimum Implementation.....A-159	
J9.1	Word, Data Element, and Data Item Minimum Implementation.....A-165	
J10.2	Word, Data Element, and Data Item Minimum Implementation.....A-169	
J10.3	Word, Data Element, and Data Item Minimum Implementation.....A-175	
J10.5	Word, Data Element, and Data Item Minimum Implementation.....A-176	
J10.6	Word, Data Element, and Data Item Minimum Implementation.....A-177	
J12.0	Word, Data Element, and Data Item Minimum Implementation.....A-179	
J12.1	Word, Data Element, and Data Item Minimum Implementation.....A-221	
J12.2	Word, Data Element, and Data Item Minimum Implementation.....A-231	
J12.3	Word, Data Element, and Data Item Minimum Implementation.....A-235	
J12.4	Word, Data Element, and Data Item Minimum Implementation.....A-241	
J12.5	Word, Data Element, and Data Item Minimum Implementation.....A-245	
J12.6	Word, Data Element, and Data Item Minimum Implementation.....A-246	
J12.7	Word, Data Element, and Data Item Minimum Implementation.....A-299	
J13.0	Word, Data Element, and Data Item Minimum Implementation.....A-301	
J13.2	Word, Data Element, and Data Item Minimum Implementation.....A-305	
J13.3	Word, Data Element, and Data Item Minimum Implementation.....A-309	
J13.4	Word, Data Element, and Data Item Minimum Implementation.....A-313	
J13.5	Word, Data Element, and Data Item Minimum Implementation.....A-315	
J14.0	Word, Data Element, and Data Item Minimum Implementation.....A-317	
J14.2	Word, Data Element, and Data Item Minimum Implementation.....A-327	
J15.0	Word, Data Element, and Data Item Minimum Implementation.....A-353	
J17.0	Word, Data Element, and Data Item Minimum Implementation.....A-355	
J28.20	Word, Data Element, and Data Item Minimum Implementation.....A-357	

J31.0	Word, Data Element, and Data Item Minimum Implementation.....A-359
-------	--

MINIMUM IMPLEMENTATION
TABLE OF CONTENTS (continued)

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
J31.1	Word, Data Element, and Data Item Minimum Implementation.....A-367	
J31.7	Word, Data Element, and Data Item Minimum Implementation.....A-368	
RTT-A	Word, Data Element, and Data Item Minimum Implementation.....A-369	
RTT-B	Word, Data Element, and Data Item Minimum Implementation.....A-370	
RTT-REPLY	Word, Data Element, and Data Item Minimum Implementation.....A-371	

LIST OF TABLES

<u>Table</u>	<u>Page</u>
Table A.5-1	Symbol DefinitionsA-9
Table A.5-2	Explanation of Numerical NotationsA-10
Table A.5-3	Related Function Minimum Implementation for C ² JUsA-19
Table A.5-4	Related Function Minimum Implementation for NonC ² JUsA-20
Table A.5-5	Terminal Baseline Message ImplementationA-25
Table A.5-6	Net Control Station Message Minimum ImplementationA-25
Table A.5-7	Network Manager Message Minimum ImplementationA-26
Table A.5-8	Distributed Routing Message Minimum ImplementationA-26
Table A.5-9	Common Message Minimum Implementation for Tactical Data SystemsA-26
Table A.5-10	Time Slot Reallocation Message Minimum ImplementationA-27
Table A.5-11	Message Minimum Implementation by Function for C ² JUsA-29
Table A.5-12	Message Minimum Implementation by Function for NonC ² JUsA-35
Table A.5-15	Link 16 Message and Purpose ListingA-44
Table A.5-J0.0	Word, Data Element, and Data Item Minimum ImplementationA-57
Table A.5-J0.1	Word, Data Element, and Data Item Minimum ImplementationA-59
Table A.5-J0.2	Word, Data Element, and Data Item Minimum ImplementationA-60
Table A.5-J0.3	Word, Data Element, and Data Item Minimum ImplementationA-61
Table A.5-J0.4	Word, Data Element, and Data Item Minimum ImplementationA-63
Table A.5-J0.5	Word, Data Element, and Data Item Minimum ImplementationA-65
Table A.5-J0.6	Word, Data Element, and Data Item Minimum ImplementationA-67
Table A.5-J0.7	Word, Data Element, and Data Item Minimum ImplementationA-69
Table A.5-J1.0	Word, Data Element, and Data Item Minimum Minimum ImplementationA-71
Table A.5-J1.1	Word, Data Element, and Data Item Minimum ImplementationA-73
Table A.5-J1.2	Word, Data Element, and Data Item Minimum ImplementationA-77
Table A.5-J1.3	Word, Data Element, and Data Item Minimum ImplementationA-79
Table A.5-J1.4	Word, Data Element, and Data Item Minimum ImplementationA-83

MIL-STD-6016B

Table	A.5-J1.5	Word, Data Element, and Data Item Minimum Implementation.....	A-91
Table	A.5-J1.6	Word, Data Element, and Data Item Minimum Implementation.....	A-93
LIST OF TABLES (continued)			
<u>Table</u>			<u>Page</u>
Table	A.5-J2.0	Word, Data Element, and Data Item Minimum Implementation.....	A-95
Table	A.5-J2.2	Word, Data Element, and Data Item Minimum Implementation.....	A-97
Table	A.5-J2.3	Word, Data Element, and Data Item Minimum Implementation.....	A-99
Table	A.5-J2.4	Word, Data Element, and Data Item Minimum Implementation.....	A-101
Table	A.5-J2.5	Word, Data Element, and Data Item Minimum Implementation.....	A-103
Table	A.5-J2.6	Word, Data Element, and Data Item Minimum Implementation.....	A-105
Table	A.5-J3.0	Word, Data Element, and Data Item Minimum Implementation.....	A-107
Table	A.5-J3.1	Word, Data Element, and Data Item Minimum Implementation.....	A-111
Table	A.5-J3.2	Word, Data Element, and Data Item Minimum Implementation.....	A-112
Table	A.5-J3.3	Word, Data Element, and Data Item Minimum Implementation.....	A-115
Table	A.5-J3.4	Word, Data Element, and Data Item Minimum Implementation.....	A-117
Table	A.5-J3.5-1	Point/Track Indicator Value Minimum Implementation for the J3.5 Message.....	A-120
Table	A.5-J3.5-2	Word Level Minimum Implementation by Point/Track Indicator Value	A-120
Table	A.5-J3.5-3	Data Level Minimum Implementation by Point/Track Indicator Value.....	A-121
Table	A.5-J3.6	Word, Data Element, and Data Item Minimum Implementation.....	A-123
Table	A.5-J3.7-1	Fix or Bearing Descriptor Value Minimum Implementation for the J3.7 Message.....	A-128
Table	A.5-J3.7-2	Word Element Level Minimum Implementation by Fix or Bearing Descriptor Value.....	A-128
Table	A.5-J3.7-3	Data Element Level Minimum Implementation by Fix or Bearing Descriptor Value.....	A-129
Table	A.5-J5.4	Word, Data Element, and Data Item Minimum Implementation.....	A-133
Table	A.5-J6.0	Word, Data Element, and Data Item Minimum Implementation.....	A-135
Table	A.5-J7.0-1	Action, Track Management Value Minimum Implementation for the J7.0 Message.....	A-138
Table	A.5-J7.0-2	Word Level Minimum Implementation Action, Track Management Value.....	A-138
Table	A.5-J7.0-3	Data Element Level Minimum Implementation by Action, Track Management Value	A-139
Table	A.5-J7.1-1	Action, Data Update Request Value Minimum Implementation for the J7.1 Message.....	A-142
Table	A.5-J7.1-2	Word Level Minimum Implementation Action, Data Update Request Value.....	A-142
Table	A.5-J7.1-3	Data Element Level Minimum Implementation by Action, Data Update Request Value.....	A-142
Table	A.5-J7.2	Word, Data Element, and Data Item Minimum Implementation.....	A-143

MIL-STD-6016B

Table A.5-J7.3	Word, Data Element, and Data Item Minimum Implementation.....	A-144
Table A.5-J7.4	Word, Data Element, and Data Item Minimum Implementation.....	A-147

LIST OF TABLES (continued)

<u>Table</u>		<u>Page</u>
Table A.5-J7.5-1	Action, IFF/SIF Management Value Minimum Implementation for the J7.5 Message.....	A-150
Table A.5-J7.5-2	Word Level Minimum Implementation by Action, IFF/SIF Management Value.....	A-150
Table A.5-J7.5-3	Data Element Level Minimum Implementation by Action, IFF/SIF Management Value.....	A-150
Table A.5-J7.6-1	Action, Filter Management Minimum Implementation for the J7.6 Message.....	A-152
Table A.5-J7.6-2	Word Element Level Minimum Implementation by Action, Filter Management Value.....	A-152
Table A.5-J7.6-3	Data Element Level Minimum Implementation by Action, Filter Management Value.....	A-153
Table A.5-J7.7	Word, Data Element, and Data Item Minimum Implementation.....	A-155
Table A.5-J8.0	Word, Data Element, and Data Item Minimum Implementation.....	A-157
Table A.5-J8.1	Word, Data Element, and Data Item Minimum Implementation.....	A-158
Table A.5-J9.0-1	Command Value Minimum Implementation by Mission Category.....	A-160
Table A.5-J9.0-2	Word Level Minimum Implementation by Command Value ...	A-161
Table A.5-J9.0-3	Data Element Level Minimum Implementation by Command Value.....	A-162
Table A.5-J9.1-1	Engagement Coordination Action Value Minimum Implementation for the J9.1 Message.....	A-166
Table A.5-J9.1-2	Word Level Minimum Implementation by Engagement Coordination Action Value.....	A-166
Table A.5-J9.1-3	Data Element Level Minimum Implementation by Engagement Coordination Action Value.....	A-166
Table A.5-J10.2-1	Weapon Engagement Status Value Minimum Implementation by Mission Category.....	A-170
Table A.5-J10.2-2	Word Level Minimum Implementation by Weapon Status Value.....	A-172
Table A.5-J10.2-3	Data Element Level Minimum Implementation by Weapon Engagement Status Value.....	A-173
Table A.5-J10.3	Word, Data Element, and Data Item Minimum Implementation.....	A-175
Table A.5-J10.5	Word, Data Element, and Data Item Minimum Implementation.....	A-176
Table A.5-J10.6-1	Pairing Action Value Minimum Implementation by Mission Category.....	A-178
Table A.5-J10.6-2	Word Level Minimum Implementation by Pairing Action Value.....	A-178
Table A.5-J10.6-3	Data Element Level Minimum Implementation for All Defined Pairing Action Values.....	A-178
Table A.5-J12.0-1	Mission Assignment Discrete Value Minimum Implementation by Mission Category.....	A-180
Table A.5-J12.0-2	Word Level Minimum Implementation by Mission Assignment Discrete Value.....	A-184
Table A.5-J12.0-3	Data Element Level Minimum Implementation by Mission Assignment Discrete Value.....	A-190
Table A.5-J12.1-1	Vector Discrete Value Minimum Implementation by Mission Category.....	A-222

MIL-STD-6016B

Table	A.5-J12.1-2	Word Level Minimum Implementation by Vector Discrete Value.....	A-224
Table	A.5-J12.1-3	Data Element Level Minimum Implementation by Vector Discrete Value.....	A-225

LIST OF TABLES (continued)

<u>Table</u>		<u>Page</u>
Table	A.5-J12.2-1 Precision Aircraft Direction Discrete Value Minimum Implementation by Mission Category.....	A-232
Table	A.5-J12.2-2 Word Level Minimum Implementation by Aircraft Direction Discrete Value.....	A-233
Table	A.5-J12.2-3 Data Element Level Minimum Implementation by Precision Aircraft Direction Discrete Value.....	A-234
Table	A.5-J12.3-1 Waypoint Action/Descriptor Value Minimum Implementation by Mission Category.....	A-236
Table	A.5-J12.3-2 Word Level Minimum Implementation by Waypoint Action/Descriptor Value.....	A-237
Table	A.5-J12.3-3 Data Element Level Minimum Implementation by Waypoint Action/Descriptor Value.....	A-238
Table	A.5-J12.4-1 Control Change Indicator Value Minimum Implementation by Mission Category.....	A-242
Table	A.5-J12.4-2 Word Level Minimum Implementation by Control Change Indicator Value.....	A-243
Table	A.5-J12.4-3 Data Element Level Minimum Implementation by Control Change Indicator Value.....	A-243
Table	A.5-J12.5 Word, Data Element, and Data Item Minimum Implementation.....	A-245
Table	A.5-J12.6-1 Status Information Discrete Value Minimum Implementation by Mission Category.....	A-247
Table	A.5-J12.6-2 Word Level Minimum Implementation by Status Information Discrete Value.....	A-249
Table	A.5-J12.6-3 Data Element Level Minimum Implementation by Status Information Discrete Value.....	A-259
Table	A.5-J12.7 Word, Data Element, and Data Item Minimum Implementation.....	A-299
Table	A.5-J13.0 Word, Data Element, and Data Item Minimum Implementation.....	A-301
Table	A.5-J13.2 Word, Data Element, and Data Item Minimum Implementation.....	A-305
Table	A.5-J13.3 Word, Data Element, and Data Item Minimum Implementation.....	A-309
Table	A.5-J13.4 Word, Data Element, and Data Item Minimum Implementation.....	A-313
Table	A.5-J13.5 Word, Data Element, and Data Item Minimum Implementation.....	A-315
Table	A.5-J14.0-1 Fix or Bearing Descriptor Value Minimum Implementation for the J14.0 Message.....	A-318
Table	A.5-J14.0-2 Word Level Minimum Implementation by Fix or Bearing Descriptor Value.....	A-319
Table	A.5-J14.0-3 Data Element Level Minimum Implementation by Fix or Bearing Descriptor Value.....	A-320
Table	A.5-J14.2-1 EW Action Value Minimum Implementation for the J14.2 Message.....	A-328
Table	A.5-J14.2-2 Word Level Minimum Implementation by Electronic Warfare Action Value.....	A-329
Table	A.5-J14.2-3 Data Element Level Minimum Implementation by Electronic Warfare Action Value.....	A-332
Table	A.5-J15.0 Word, Data Element, and Data Item Minimum	

MIL-STD-6016B

		Implementation.....A-353
Table A.5-J17.0	Word, Data Element, and Data Item Minimum	
	Implementation.....A-355	
Table A.5-J28.20	Word, Data Element, and Data Item Minimum	
	Implementation.....A-357	

LIST OF TABLES (continued)

<u>Table</u>		<u>Page</u>
Table A.5-J31.0-1	Action Code, Over the Air Rekeying Value Minimum Implementation for the J31.0 Message.....A-360	
Table A.5-J31.0-2	Word Level Minimum Implementation by Action Code, Over-the-Air Rekeying Value.....A-361	
Table A.5-J31.0-3	Data Element Level Minimum Implementation by Action Code, Over-the-Air Rekeying Value.....A-362	
Table A.5-J31.1	Word, Data Element, and Data Item Minimum Implementation.....A-367	
Table A.5-J31.7	Word, Data Element, and Data Item Minimum Implementation.....A-368	
Table RTT-A	Word, Data Element, and Data Item Minimum Implementation.....A-369	
Table RTT-B	Word, Data Element, and Data Item Minimum Implementation.....A-370	
Table RTT-REPLY	Word, Data Element, and Data Item Minimum Implementation.....A-371	

TABLE OF CONTENTS (continued)

APPENDIX B

DATA ELEMENT DICTIONARY

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
B.1	Scope.....B-1	
B.2	Applicable Documents.....B-1	
B.3	Definitions.....B-1	
B.4	General Requirements.....B-1	
B.4.1	Rules and Conventions.....B-1	
B.4.1.1	General.....B-1	
B.4.1.2	DFI.....B-2	
B.4.1.2.1	DFI Name.....B-2	
B.4.1.2.2	DFI Definition.....B-2	
B.4.1.3	DUI.....B-3	
B.4.1.3.1	DUI name.....B-3	
B.4.1.3.2	Field Descriptor.....B-3	
B.4.1.3.3	DUI Explanation.....B-3	
B.4.1.4	DI.....B-3	
B.4.1.4.1	DI Name.....B-4	
B.4.1.4.2	Bit Codes.....B-4	
B.4.1.4.3	DI Explanation.....B-4	
B.4.1.4.4	Generic Data Items Entries.....B-5	
B.4.1.4.5	No Statement Assignment.....B-6	
B.4.1.5	Definition of Symbols that can be used in DFI and DUI Name..B-6	
B.4.2	Description.....B-6	
B.5	Detailed Requirements.....B-12	
B.5.1	Index of DFIs and DUIs.....B-12	
B.5.2	Message Elements.....B-146	

TABLE OF CONTENTS (continued)

APPENDIX C

DATA FORWARDING

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
C.1	Scope.....	C-1
C.2	Applicable Documents.....	C-1
C.2.1	General.....	C-1
C.2.2	Government Documents.....	C-1
C.2.2.1	Specifications, Standards, and Handbooks.....	C-1
C.3	Definitions.....	C-3
C.4	General Requirements.....	C-5
C.4.1	Data Forwarding Rules.....	C-5
C.4.1.1	Forwarding Requirements.....	C-6
C.4.1.2	Forwarding Considerations.....	C-6
C.4.1.3	Concurrent Operations.....	C-6
C.4.2	Data Forwarding Process.....	C-6
C.4.2.1	Message Translation.....	C-7
C.4.2.2	Data Element Translation.....	C-7
C.4.2.2.1	Data Element Equivalence.....	C-7
C.4.2.2.2	Data Element Conversion.....	C-8
C.4.2.2.3	Special Considerations.....	C-8
C.4.3	General Forwarding Rules.....	C-8
C.4.4	Active/Inactive Status.....	C-11
C.4.4.1	Link 11 to Link 16 Active Unit Indication.....	C-11
C.4.4.2	Link 11B to Link 16 Active Unit Indication.....	C-12
C.4.4.3	Link 16 to Link 11 Active Unit Indication.....	C-12
C.4.4.4	Link 16 to Link 11B Active Unit Indication.....	C-12
C.4.4.5	Link 11 to Link 16 Inactive Unit Indication.....	C-13
C.4.4.6	Link 11B to Link 16 Inactive Unit Indication.....	C-13
C.4.4.7	Link 16 to Link 11/11B Inactive Unit Indication.....	C-13
C.4.5	TDL Unique Forwarding Rules.....	C-14
C.4.5.1	Forwarding of Data on Link 16.....	C-14
C.4.5.2	Forwarding of Data on Link 11.....	C-14
C.4.5.3	Forwarding of Data on Link 11B.....	C-14
C.4.6	Data Forwarding of Information Requiring Special Processing...	C-15
C.4.6.1	Data Forwarding of Information Requiring Special Processing to Link 11B.....	C-15
C.4.6.2	Data Forwarding of Information Requiring Special Processing to Link 11.....	C-15
C.4.6.3	Data Forwarding of Information Requiring Special Processing to Link 16.....	C-15
C.4.7	Precise Participant Location and Identification Data Forwarding.....	C-16
C.4.7.1	NonC ² JU Data Forwarding.....	C-16
C.4.7.2	C ² JU Data Forwarding.....	C-17
C.4.8	Data Forwarding Management.....	C-17
C.4.8.1	Surveillance Data Forwarding.....	C-17
C.4.8.2	Forwarding Controlling Unit Data.....	C-18
C.4.8.2.1	Link 16 to Link 11/11B.....	C-18
C.4.8.2.2	Link 11/11B to Link 16.....	C-18
C.4.8.3	Forwarding IFF/SIF Information.....	C-19
C.4.8.3.1	Forwarding IFF/SIF Surveillance Information.....	C-19
C.4.8.3.2	Forwarding IFF/SIF Management Information.....	C-19
C.4.8.3.3	Forwarding Special Code Information.....	C-19
C.4.8.4	Forwarding Addressed Messages Having Receipt/Compliance.....	C-19
C.4.8.5	Electronic Warfare Data Forwarding.....	C-47
C.4.8.6	Forwarding Simulated Data.....	C-48
C.4.8.6.1	Link 16 to Link 11.....	C-48
C.4.8.6.2	Link 16 to Link 11B.....	C-48

MIL-STD-6016B

C.4.8.6.3	Link 11/11B to Link 16.....	C-48
TABLE OF CONTENTS (continued)		

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
C.4.8.6.4	FJU Simulation Filter.....	C-49
C.4.9	Message and Word Numbering Conventions.....	C-49
C.4.9.1	Link 16 (J-series).....	C-49
C.4.9.1.1	Message.....	C-49
C.4.9.1.2	Basic Message.....	C-49
C.4.9.1.3	Initial Word.....	C-50
C.4.9.1.4	Extension Word.....	C-50
C.4.9.1.5	Continuation Word.....	C-50
C.4.9.1.6	Link 16 Message Labeling Scheme.....	C-50
C.4.9.2	Link 11/11B (M-series).....	C-50
C.4.9.2.1	Message.....	C-51
C.5	Detailed Requirements.....	C-57
C.5.1	Message Translation Requirements.....	C-57
C.5.1.1	General.....	C-57
C.5.1.2	Detailed Description of Contents.....	C-57
C.5.1.2.1	Message Translation Trees	C-58
C.5.1.2.1.1	Basic Translation Criteria.....	C-58
C.5.1.2.1.2	Test Node Diagram and Conditions.....	C-58
C.5.1.2.1.3	Required Actions.....	C-59
C.5.1.2.1.4	Notes.....	C-59
C.5.1.2.2	Related Messages.....	C-59
C.5.1.2.3	Forwarding Transmit Requirements.....	C-60
C.5.1.2.4	Data Retention Rules.....	C-60
C.5.1.2.4.1	General Retention Rules.....	C-60
C.5.1.2.4.2	Minimum Retention Times.....	C-61
C.5.1.3	Technically Illegal/Invalid Message/Message Sequence Determination.....	C-62
C.5.1.3.1	General.....	C-62
C.5.1.3.2	Technically Illegal/Invalid Examples.....	C-63
C.5.2	Data Element Translation.....	C-359
C.5.2.1	General.....	C-359
C.5.2.2	Detailed Description of Contents.....	C-359
C.5.2.2.1	Data Element Translation Tables.....	C-359
C.5.2.2.1.1	Link 16 Data Element Translation Tables.....	C-359
C.5.2.2.1.2	Link 11/11B Data Element Translation Tables.....	C-360
C.5.2.2.2	Data Element Translation Table Entries.....	C-361
C.5.2.3	Default Conditions.....	C-362
C.5.3	General Notes for Message Data Element Translation.....	C-879

APPENDIX D

SYSTEM IMPLEMENTATION

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
D.1	SCOPE.....	D-1
D.2	APPLICABLE DOCUMENTS.....	D-1
D.3	DEFINITIONS.....	D-1
D.4	GENERAL REQUIREMENTS.....	D-1
D.4.1	Description.....	D-1
D.4.1.1	System Function Listing.....	D-2
D.4.1.2	Data Item Implementation Report.....	D-5
D.4.1.3	Systems.....	D-10

TABLE OF CONTENTS (continued)

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
D.5	DETAILED REQUIREMENTS.....	D-11
D.5.1	System Implementation Codes.....	D-11
D.5.1.1	Message and Word Level Transmit Codes.....	D-11
D.5.1.2	DFI/DUI Level Transmit Codes.....	D-11
D.5.1.3	DI Level Transmit Codes.....	D-12
D.5.1.4	Message Level Receive Codes.....	D-12
D.5.1.5	Word Level Receive Codes.....	D-12
D.5.1.6	DFI/DUI Level Receive Codes.....	D-13
D.5.1.7	DI Level Receive Codes.....	D-13
D.5.1.8	Data Forwarding Codes.....	D-14
D.5.2	Hierarchical Dependency of Implementation Codes.....	D-14
D.5.2.1	Message Level Transmission Code Rules.....	D-14
D.5.2.2	Word Level Transmission Code Rules.....	D-15
D.5.2.3	DFI/DUI Level Transmission Code Rules.....	D-16
D.5.2.4	Message Level Reception Code Rules.....	D-17
D.5.2.5	Word Level Reception Code Rules.....	D-17
D.5.2.6	DFI/DUI Level Reception Code Rules.....	D-18
D.5.2.7	Action Value Rules.....	D-19
D.5.2.8	Forwarding Code Rules.....	D-20
APPENDIX E	ICP REPOSITORY	
	Maintained separately by Defense Information Systems Agency (DISA/IN5).	

THIS PAGE IS INTENTIONALLY LEFT BLANK

MIL-STD-6016B

SECTION 1

1. SCOPE

1.1 PURPOSE

The purpose of MIL-STD-6016 is to describe the approved standards to achieve compatibility and interoperability between command and control and communications systems and equipment of U.S. military forces employed or intended to be employed in joint tactical operations. This publication is to be complemented by CJCSM 6120.01, Joint Multi-Tactical Data Link (TDL) Operating Procedures (JMTOP), which will provide for planning and common procedures to be used by forces in the joint tactical environment using Link 16 as the basis for information exchange.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

1.2 DOCUMENT STRUCTURE

MIL-STD-6016 consists of six sections and five appendices. Section 1 provides the introduction and scope. Section 2 provides the applicable documents required to operate on Link 16. Section 3 contains a glossary of terms and definitions and a summary description of The Joint Tactical Information Distribution System (JTIDS). Certain terms concerning interoperability, compatibility, and commonality are included, as well as other terms that have discrete meaning within the framework of MIL-STD-6016. Section 4 contains the general requirements, conventions, and protocols for information exchange and forwarding on Link 16. Section 5 contains the detailed requirements for the Link 16 fixed format message construction and the J-Series word descriptions. Shown for each Link 16 message is the message designator, purpose, format, transmit/receive rules, word map, word description and field coding. The specific J-Series word descriptions are contained in three parts separated from the main volume of MIL-STD 6016; Part 1 contains the detailed descriptions for Link 16 words J0 through J6; Part 2 contains the detailed descriptions for Link 16 words J7 through J12; Part 3 contains the detailed descriptions for Link 16 words J12 through the RTT words. Section 6 contains notes of a general nature that apply to the use of this document.

Appendix A identifies the minimum implementation requirements that must be met by all Service/Agency (S/A) systems participating on the Link 16 Interface. Satisfaction of these joint data exchange requirements is mandatory to establish and maintain the Link 16 Interface, to participate within a specific technical function, and to prevent adverse effects on the interface. Minimum implementation requirements must be satisfied at each of seven different levels: functional, related function, message, related message, word, data element, and data item. These requirements are defined in terms of transmission and reception for both Command and Control JTIDS Units (C² JUs) and nonC² JUs.

Appendix B contains a dictionary of the data elements used in Link 16. The data elements are uniquely specified by two numbers, the Data Field Identifier (DFI) and its Data Use Identifier (DUI). The DFI includes a single concept and is the generic representation of the DUIs grouped under it. The DUIs, which are representative of the DFI concept, contain the Data

MIL-STD-6016B

Items (DIs) used to compose the data element. Alphabetical and numerical indexes of the DFIs and DUIs are included in Appendix B Sections 1 and 2; the DFIs are listed in numerical sequence in Section 3.

Appendix C contains the data forwarding rules, protocols, and translations required between J series and M series messages. Data forwarding is the process of receiving data on one digital data link and outputting the data in the proper format and protocol of another digital data link. In the process, a message(s) received on one link is translated to an appropriate message(s) on another link. All systems that forward data must adhere to Appendix C. In the course of implementing Link 16, it is recognized that some systems may use internal system translations (e.g., Link 16 to Link 11B) and some systems may transmit originated track data on more than one data link at the same time. Functionally, such systems are not data forwarders; however, they will adhere to the guidance in Appendix C to ensure that the closest possible relationship of data elements and data element interpretation will be maintained among all users of the data.

Appendix D, and the information for the Classified Supplements located in the TDL Development System (TDS), describes the Link 16 implementation by each service/agency participating in the Link 16 joint interface. It shows the implementation from the functional level down to the data item level for each system.

Appendix E is the repository for Interface Change Proposals (ICPs) written against MIL-STD-6016. This appendix is maintained separately by the Defense Information System Agency (DISA/IN5). A complete listing of all TDL ICPs and their current status is contained in the DISA TDL ICP Status Report, which is updated after each CCB meeting.

1.3 BACKGROUND

JCS Memorandum SM-205-71, 1 April 1971, established a program to ensure the joint interoperability of tactical command and control systems in support of the Ground and Amphibious Military Operations (GAMO) Program. The Joint Interoperability of Tactical Command and Control Systems (JINTACCS) Program was established by JCS Memorandum SM-184-78, 7 March 1978, to replace the GAMO Program, although directives that were pertinent to the GAMO Program are considered applicable to the JINTACCS Program. The JTIDS/MIDS program was established as a Joint Service Program to develop and acquire a secure, jam-resistant communications system with inherent capabilities to support information distribution, relative navigation, and identification that would support both intra- and inter-Service information exchange between tactical command and control facilities/systems. JCS Memorandum SM-362-75, 2 July 1975, stipulates the relationship between the JTIDS/MIDS and GAMO (now the JINTACCS) Programs. JTIDS/MIDS may provide either primary or alternate transmission means through which appropriate tactical data systems are interconnected. The Joint Chiefs of Staff had directed the GAMO Executive Agent (EA) (SM-575-77, 27 June 1977) to develop the message standard for the JTIDS/MIDS, which included the development of a JTIDS Technical Interface Concept (JTIC) and a JTIDS Technical Interface Design Plan - Test Edition (JTIDP-TE), as well as the responsibility to plan, schedule, conduct, and evaluate joint testing of the JTIDP in order to validate its compatibility and interoperability for the Joint Chiefs of Staff.

The Joint Chiefs of Staff and the Services determined that the requirement for the JINTACCS Program would be extended beyond FY 1985, the year the program originally was to be completed. JCS Memorandum SM-750-82, 6 December 1982, was issued to ensure that the program responsibilities would be accomplished. SM-750-82 tasked the Chief of Staff, U.S. Army as the EA responsible for managing the development and the testing of joint message standards for the JTIDS/MIDS. In addition, this memorandum expanded the previous tasking by including a requirement to develop the Link 16 Interface Management Plan to show phased implementation of the Link 16 Interface for systems/platforms that are specified by the Services in the JTIC.

On 5 July 1984, the Deputy Secretary of Defense signed DOD Directive 5154.28, which established the Joint Tactical Command, Control and Communications

MIL-STD-6016B

Agency (JTC3A) under the Defense Communication Agency (DCA), and assigned to it responsibility for the development and maintenance of a joint architecture, interface standards, and interface definitions for tactical/mobile C³ systems. All program activities and resources of the Joint Tactical Communication Office and the JINTACCS Program were transferred to the JTC3A. JTC3A on 1 February 1992 was changed to the Joint Information Engineering Organization (JIEO) in the Defense Information System Agency (DISA), formerly DCA.

The Joint Multi-TADIL Standards Working Group (JMSWG), chaired by JIEO, directed on 10 May 1996, that the JTIDP-TE, a test document, be superseded by MIL-STD-6016, Tactical Digital Information Link (TADIL) J Message Standard, in order to establish an approved operational baseline.

1.4 POLICY

Applicable statements of policy are contained in DOD directives and correspondence. Essentially, interoperability, compatibility, and commonality in the degree necessary to provide for flexible, effective, and economical operation of tactical forces will be achieved. Commonality, compatibility, and interoperability are objectives. Interoperability in joint tactical operations is absolutely essential for operational effectiveness.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

1.5 CONCEPT

MIL-STD-6016 complies with basic DOD policies and has been developed in consonance with the following concepts:

a. Tactical command and control, and communications systems standards are developed only for systems and equipment applicable to functional areas in which the need for interoperability and compatibility has been validated as essential by the Joint Chiefs of Staff.

b. These standards apply to operational and future tactical systems and use system characteristics previously approved for Service use where such characteristics meet the joint requirements.

c. This document establishes certain standards and criteria for message formats and transmission characteristics that will be used in the design and/or procurement of systems and equipment. Additionally, these standards will be used in computer program development and when new system designs are implemented within existing systems.

d. An interface between tactical systems should exploit the maximum capability of sensors and processors to provide precise information exchange in support of tactical operations.

e. Message format standards and information exchange criteria in those standards are designed to support established doctrine and known requirements. They will be responsive to revision, as indicated.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

1.6 DEVELOPMENT OF STANDARDS

MIL-STD-6016 was developed based on information produced by and coordinated with the U.S. Army, U.S. Navy, U.S. Air Force, U.S. Marine Corps, the National Security Agency, and the Defense Intelligence Agency, as documented in the JTIC dated April 1982 (amended and approved by the Joint Chiefs of Staff (JCS) on 5 May 1983). Additionally, coordination was accomplished with international standards under guidance of the Joint Chiefs of Staff.

a. Within the Joint Staff, standardization is accomplished by the Director for Command, Control and Communications Systems, J-6. Through the Director, J-6, the Defense Information Systems Agency (DISA/IN5) develops standards and criteria, as necessary.

b. During the development of tactical standards, it is necessary to consider the relationship to other national standards and international standards. DISA/IN5 develops these standards in consultation with other activities of the Department of Defense, including DISA, DIA, and NSA/CSS, to ensure compatibility between U.S. tactical and strategic systems and equipment. Formal coordination is obtained, where necessary, through actions of the Joint Chiefs of Staff. International applications are considered during the development and revision of standards through consultation with various national and international agencies. NATO STANAG 5516 and STANAG 5616 reflects these standards for Link 16.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

1.7 APPLICATION OF STANDARDS

MIL-STD-6016 is used by the Services, commands, and applicable DOD Agencies in developing and acquiring new systems, computer programs, and equipment as required, for updating existing systems for use on the Link 16 Interface. The application of the minimum requirements for information exchange on Link 16 is provided in the following paragraphs:

a. Application of Minimum Requirements: The mandatory minimum requirements, Appendix A, apply to all systems, existing and future, that elect to exchange information via Link 16. The applicability of these requirements is directed toward digital data exchange in a joint environment where systems of two or more Services/DOD Agencies are involved. These requirements should be used as guidelines for internal service or system data links when no external interface exists.

b. Exceptions to Minimum Requirements: Exceptions to the minimum requirements for information exchange will be considered and approved or denied on a case by case basis by DISA/IN5.

Requests for exceptions will be submitted by the individual Service/DOD Agency to DISA/IN5 for approval or resolution. Action on the request will be in accordance with CJCSI 6610.01, TADIL Standardization Policy and Procedures and with JIEO Plan 3200, Department of Defense Information Technology (IT) Standards Management Plan. The request will identify the specific tactical data system, the items for which the exception is requested, and the reason for requesting the exception.

The channel for submission of requests for exceptions is the same as that for submitting recommended changes to these standards.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

1.8 CONFIGURATION MANAGEMENT

MIL-STD-6016 will be maintained as a baseline for configuration management of the Link 16 Interface in accordance with the JIEO Configuration Management Plan (CMP).

The Director, DISA/IN5 is responsible for configuration management of MIL-STD-6016. S/A requests for changes must be prepared, submitted, and processed in accordance with the JIEO CMP. Approved changes will be promulgated to all participants by DISA/IN5. The application or waiver of a standard to a specific equipment or system is the responsibility of the Secretary of Defense.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

1.9 INTERFACE OPERATING PROCEDURES

The Link 16 Interface operating procedures are contained in CJCSM 6120.01, Joint Multi-Tactical Data Link (TDL) Operating Procedures (JMTOP).

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

SECTION 2

2. APPLICABLE DOCUMENTS

2.1 MILITARY STANDARD

2.1.1 DEPARTMENT OF DEFENSE (DOD) STANDARDS

a. MIL-STD-188-203-1A - Tactical Digital Information Link (TADIL) A Message Standard.

b. MIL-STD-203-3 - Tactical Digital Information Link (TADIL) C Message Standard.

c. MIL-STD-188-212 - Tactical Digital Information Link (TADIL) B Message Standard.

d. MIL-STD-6004 - Tactical Digital Information Link (TADIL) C Message Standard.

e. MIL-STD-6011 - Tactical Data Link (TDL) 11/11B Message Standard.

f. MIL-STD-6040 - U.S. Message Text Formatting Program.

2.1.2 NORTH ATLANTIC TREATY ORGANIZATION (NATO) STANDARDIZATION AGREEMENT (STANAG)

a. STANAG 5511 - Tactical Data Exchange - Link 11.

b. STANAG 5516 - Tactical Data Exchange - Link 16.

c. STANAG 5616 - Standards for Data Forwarding Between Tactical Data Systems Employing Digital Data Link 11/11B and Tactical Data Systems Employing Link 16.

2.2 OTHER PUBLICATIONS

- a. ACP 167E - Glossary of Communications-Electronics Terms.
- b. Joint Pub 1-02 - Department of Defense Dictionary of Military and Associated Terms.
- c. CJCSM 6120.01, Joint Multi-Tactical Data Link (TDL) Operating Procedures.
- d. CJCSM 6610.01, JINTACCS Standard Policy TADIL Standardization Policy and Procedures.
- e. System Segment Specification for JTIDS/MIDS Class 2 Terminal.

2.3 ORDER OF PRECEDENCE

In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however supersedes applicable laws and regulations unless a specific exemption has been obtained.

SECTION 3

3. DEFINITIONS

This section, in three subsections, contains Abbreviations, and Acronyms; Definition of Terms, and a summary description of the JTIDS/MIDS Technical Characteristics.

3.1 ABBREVIATIONS AND ACRONYMS

This section defines the abbreviations and acronyms used in the standard.

AAW	Anti-Air Warfare
AC	Action/Action Code
ACK	Acknowledge
ACLS	Automatic Carrier Landing System
ACT	Action/Action Value
AD	Air Defense
AGL	Above Ground Level
AIC	Air Intercept Control
AJ	Antijam
AIC	Air Intercept Control
ALS	Automatic Landing System
AOP	Area of Probability
AOR	Area of Responsibility
ARM	Antiradiation Missile
ASW	Antisubmarine Warfare
ATC	Air Traffic Control
ATDL-1	Army Tactical Data Link-1
C ²	Command and Control
C ² IU	Command and Control Interface Unit
C ² JU	Command and Control JTIDS Unit
C ³ CM	Command, Control, and Communications Countermeasures
CAINS	Carrier Aircraft Inertial Navigation System
CANTCO	Cannot Comply
CANTPRO	Cannot Process
CAP	Combat Air Patrol
CAS	Close Air Support
CDS	Combat Direction System
CM	Countermeasures
COMSEC	Communications Security
CQ	Communications Quality
CRC	Control and Reporting Center
CVLL	Cryptovariable Logical Label
DF	Direction Finding
DFI	Data Field Identifier
DI	Data Item
DLA	Data Link Address
DLRP	Data Link Reference Point
DUI	Data Use Identifier
E/C	Environment/Category

MIL-STD-6016B

EA	Executive Agent or Electronic Attack
EC	Electronic Combat
EMCON	Emission Control
EMG IND	Emergency Indicator
ENV/CAT	Environment/Category
EOB	Electronic Order of Battle
EOT	End of Transmission
EP	Electronic Protection
ES	Electronic Warfare Support
EW	Electronic Warfare
EWAC	Electronic Warfare Action Value
EWS	Electronic Warfare Surveillance
FAC	Forward Air Controller
FEBA	Forward Edge of the Battle Area
FI	Filter Indicator
FIFO	First In First Out
FJU	Forwarding JTIDS Unit
FJUA	Forwarding JTIDS Unit A (between Links 11 and 16)
FJUAB	Forwarding JTIDS Unit AB (between Links 11, 11B, and 16)
FJUB	Forwarding JTIDS Unit B (between Links 11B and 16)
FLOT	Forward Line of Own Troops
FPU	Forwarding Participating Unit
FRU	Forwarding Reporting Unit
FSCL	Fire Support Coordination Line
FT IND	Force Tell Indicator
GAF	Geographic Area Filter
GMT	Greenwich Mean Time
GPS	Global Positioning System
HAVCO	Have Complied
HD SW	Height/Depth Switch
HUMINT	Human Intelligence
ICP	Interface Change Proposal
ID	Identity
ID AMP	Identity Amplification
ID CON	Identity Confidence
IFF/SIF	Identification Friend or Foe/Selective Identification Feature
IHAWK	Improved HAWK
IND	Indicator
IOP	Interface Operating Procedures
ISN	Initial Slot Number
IU	Interface Unit
JCS	Joint Chiefs of Staff
JCS Pub	Joint Chiefs of Staff Publication
JOC	Joint Operational Commander
JTAO	Joint Tactical Air Operations
JTIDS	Joint Tactical Information Distribution System
JU	JTIDS Unit
LOB	Line of Bearing
LOS	Line of Sight
MAD	Mission Assignment Discrete
MDR	Message Directed Relay
MEZ	Missile Engagement Zone
MLI	Message Length Indicator
MOP	Memorandum of Policy

MIL-STD-6016B

MPC	Message Processing Center
MR	Machine Receipt
MS	Message Start
MSEC	Message Security
MSL	Mean Sea Level
NA	Not Applicable
NATO	North Atlantic Treaty Organization
NC	Navigation Controller
NCS	Network Control Station
NES	Net Entry Signal
NON EW C ²	Non Electronic Warfare Command and Control JTIDS Unit
NPS IND	Network Participation Status Indicator
NRT	Nonreal-Time Track
NTR	Network Time Reference
NU	Not Used
OCC	Operational Contingency Constraint
OM	Original Message
OPNL CDR	Operational Commander
OTAR	Over-the-Air Rekeying
PAD	Precision Aircraft Direction
PG	Participation Group
PGC	Participation Group Community
PIM	Position and Intended Movement
PPLI	Precise Participant Location and Identification
PR	Position Reference
PRF	Pulse Repetition Frequency
PRI	Pulse Repetition Interval
PRI AMP	Primary Identity Amplification
PT	Point
PU	Participating Unit
Q _{ar}	Relative Azimuth Quality
Q _{pg}	Geodetic Position Quality
Q _{pr}	Relative Position Quality
Q _t	Time Quality
R ²	Reporting Responsibility
R/C	Receipt/Compliance
REF	Reference
REL NAV	Relative Navigation
RI	Relay Transmission Indicator
R/P	Reference Position
RPV	Remotely Piloted Vehicle
RRN	Recurrence Rate Number
R-S	Reed-Solomon
RTT	Round-Trip Timing
RU	Reporting Unit
RV	Response Value
SAI NUM	Slot Assignment Index Number
SAM	Surface-to-Air Missile
SAR	Search and Rescue
SCC	System Coordinate Center
SDU	Secure Data Unit
SEAD	Suppression of Enemy Air Defenses
SI	Scale Indicator
SID	Status Information Discrete
SIF	Selective Identification Feature
SIGINT	Signal Intelligence
SIS	Special Information System

MIL-STD-6016B

SPI	Special Processing Indicator
SU	Support Unit
SW	Switch
TACAN	Tactical Air Navigation
TACC	Tactical Air Control Center (USAF, USN) or Tactical Air Command Center (USMC)
TACS	Tactical Air Control System
TACS/TADS	Tactical Air Control System/Tactical Air Defense System
TADIL	Tactical Digital Information Link
TAOC	Tactical Air Operations Center
TBD	To Be Determined
TDMA	Time Division Multiple Access
TDS	Tactical Data System
TIDP-TE	Technical Interface Design Plan - Test Edition
TN	Track Number
TOA	Time of Arrival
TPQ	Target Position Quality
TQ	Track Quality
TR	Transmit/Receive
TRANSEC	Transmission Security
UHF	Ultra High Frequency
UME	Unformatted Message Element
UPS	Universal Polar Stereographic
USS	User Source Synchronization
UTM	Universal Transverse Mercator
W/ES	Weapon Engagement Status
WES	Weapon Engagement Status
WGS-84	World Geodetic System-84
WILCO	Will Comply

3.2 TERMS, DEFINITIONS, AND CONVENTIONS

The following terms and conventions are used for the purpose of this standard:

SHALL	indicates a procedure or capability is mandatory.
MAY	indicates a procedure or capability is optional.
WILL/IS/ARE	generally used descriptively for information purposes.

This section defines the terms and definitions used in this standard.

<u>Term</u>	<u>Definition</u>
Acknowledge	The act of notifying a unit transmitting a message that the message has been received as a valid message. (MIL-STD-6011)
Active Synchronization	A procedure used by a JTIDS/MIDS terminal to effect and maintain fine synchronization with system time based on the Round-Trip-Timing (RTT) process.
Address	A number applied to an Interface Unit to associate information and directives with interface units or tracks for both digital and voice communications. (Derived from MIL-STD-6011)
Air Support Operations (ASO)	Air Operations in support of friendly forces, to include action against enemy surface and ground assets exclusive of air-to-air operations.
Architecture	The timing structure of the system. (System Segment Specification for JTIDS/MIDS Class 2 Terminal)
Association	The automatic or manual establishment of a relationship between two or more tracks when the information on them is deemed to pertain to the same contact.

MIL-STD-6016B

Automatic Acknowledgment	A machine verification function whereby a terminal that receives a message addressed to it retransmits a copy of that message back to the source during a later time slot, verifying the receipt of the original message. (System Segment Specification for JTIDS/MIDS Class 2 Terminal).
Bit	A binary digit. In the binary system of numbering, each digit can only have one of two values (0 or 1). (Derived from ACP 167E)
Coarse Synchronization	The state of synchronization with system time that allows a terminal to receive and process messages and to achieve fine synchronization. (System Segment Specification for JTIDS/MIDS Class 2 Terminal).
Command	An order given by a commander; that is, the will of the commander expressed for the purpose of bringing about a particular action. (Joint Pub 1-02)
Command and Control JTIDS Unit(C ² JU)	A JU with command and control (C ²) capability.
Common Track	A track on which an IU holds locally derived positional information, and the IU has correlated the track to a remotely reported track. (MIL-STD-6011)
Common Tracking	The process of sharing a common track number and shifting reporting responsibility between IUs.
Compatibility	The capability of two or more items or components of equipment or materiel to exist or function in the same system or environment without mutual interference. (Joint Pub 1-02)

Concurrent Operations	The process of communicating on two, or more, digital data links at the same time, as a participant. The concurrent operating unit exchanges with these links all information held in its local data base, but remote information is not forwarded. Protocols of each link are adhered to by the concurrent operating unit. The local data base of a concurrent operating unit is the normal assimilation of data by that unit and includes local sensor data, local operator inputs, and data received and accepted into the local database from a data link, e.g., ID or IFF/SIF data.
Contention Access Mode	A transmit access mode in which a given time slot block is assigned to more than one JU. Each JU will transmit at a specified rate in the time slot block by selecting time slots for transmission pseudorandomly.
Control	The near real-time direction of weapons systems and supporting platforms for the accomplishment of assigned missions.
Correlation	The determination that a system track or local sensor track data report represents the same object or point as another track and/or the process of combining two such tracks/data under one track number.
Data Element	A basic unit (class) of information having a unique meaning and subcategories (data items) of distinct units or values. Examples of data elements are military personnel grade, sex, race, geographic location, and military unit. (Joint Pub 1-02) The Link 16 data element is the Data Use Identifier (DUI).
Data Field Identifier (DFI) (JTIDS/MIDS)	A category of data whose specification includes one or more Data Use Identifier (DUI) specifications. Each DUI's class of data must fall within the bounds of the DFI category.

Data Forwarding	The process of receiving data on one digital data link and outputting the data, using proper format and link protocols, to another type of digital data link(s). In the process, a message(s) received on one link is translated to an appropriate message(s) on another link. Data forwarding is accomplished by the selected forwarding units(s) simultaneously participating on more than one type of data link. The data that is forwarded is based on the data received and is not dependent upon the local system data of the data forwarding unit or its implementation of the received message or the forwarded message.
Data Item (JTIDS/MIDS)	A subunit of descriptive information or value classified under a data element. For example, the data element "military personnel grade" contains data items such as sergeant, captain, and colonel. (Joint Pub 1-02).
Data Link	The means of connecting one location to another for the purpose of transmitting and receiving data. (Joint Pub 1-02)
Data Mile (DM)	A standard unit of distance - 6000 feet. (Joint Pub 1-02)
Data Source	A unit to which data can be addressed and from which data can be identified as to source, e.g., all IUs. (MIL-STD-6011)
Data Symbol	A general term for representing both information symbols and parity symbols in aggregate. (System Segment Specification for JTIDS/MIDS Class 2 Terminal)
Data Use Identifier (DUI) (JTIDS/MIDS)	A JTIDS/MIDS data element (class of data). The DUI specification determines the name and permitted contents of each message field to which the DUI is assigned, as explained below.

A Data Field Identifier (DFI) specification includes a specification for each DUI under that DFI. Each DUI specification identifies the DUI name, and the data items and associated bit codes employed by the DUI. When a DUI is designated as the contents of a JTIDS message field, the DUI name is the field name, and the data items employed by the DUI are (subject to any implementation or message restrictions) the data items which may be conveyed in that field.

Decorrelation

(1) The determination that locally held track data for a given track number does not represent the same object or point as a track data being received in a remote track report for the same track number. (MIL-STD-6011)

(2) The process of establishing a new track number for a local track when a remote track report with the same track number as the local track is determined to represent a different object. (MIL-STD-6011)

Dedicated Access Mode

A transmit access mode in which time slots are assigned to an individual unit for that unit's exclusive use.

Default Condition

The state automatically assumed by a terminal's hardware or software in the absence of an input directing otherwise.

Directive

(1) A military communication in which policy is established or a specific action is ordered. (Joint Pub 1-02)

(2) A plan issued with a view to putting it in effect when so directed, or in the event that a stated contingency arises. (Joint Pub 1-02)

(3) Broadly speaking, any communication that initiates or governs action, conduct, or procedure. (Joint Pub 1-02)

Drop Track	An indication from the unit having reporting responsibility for a particular track that the unit will no longer report it. Other units holding an interest in that track may continue to report it. (Derived from Joint Pub 1-02)
Dual Designation	The same track is being reported by two or more units using two or more different track numbers. (MIL-STD-6011)
Duplicate Track Number	The same track number used by two or more units for two or more different tracks. (MIL-STD-6011)
Dynamic Network Management	Management of the network by active participation of a network manager in response to changing needs during operations, typically by use of Network Management messages.
Electronic Attack (EA)	Actions taken to prevent or reduce an enemy's effective use of the electromagnetic spectrum. EA includes electronic jamming, and electronic deception including manipulative deception, simulative deceptive and imitative deception. (Derived from Joint Pub 1-02) (corresponds to the term Electronic Countermeasures (ECM) used in NATO operations)
Electronic Protection (EP)	Actions taken to ensure effective friendly use of the electromagnetic spectrum despite the enemy's use of EW. (Derived from Joint Pub 1-02) (corresponds to the term Electronic Counter-Countermeasures (ECCM) used in NATO operations)
Electronic Warfare (EW)	Actions involving the use of electromagnetic energy to determine, exploit, reduce, or prevent hostile use of the electromagnetic spectrum, and actions retaining friendly use of the electromagnetic spectrum. There are three divisions within EW: EA, EP, and ES. (Derived from Joint Pub 1-02)

MIL-STD-6016B

Electronic Warfare Support (ES)	Actions taken to search for, intercept, locate, record, and analyze radiated electromagnetic energy for the purpose of exploiting such radiations in support of military operations. Thus, ES provides a source of EW information required to conduct EA, EP, threat detection, warning, avoidance, target acquisition, and homing. (Derived from Joint Pub 1-02) (corresponds to the term Electronic Warfare Support Measures (ESM) used in NATO operations)
Emergency Track	A track in a condition that requires immediate action or assistance; namely, an aircraft with an emergency situation or a distressed vessel. (Derived from MIL-STD-6011)
Engagement Status	The current relationship between a weapon system and a target. (Derived from MIL-STD-6011)
Environment/Category	The environment in which the associated track is operating; e.g., air, surface, subsurface.
Epoch	A 12.8-minute time interval consisting of 98,304 time slot intervals, each of 7.8125 milliseconds duration. The time slots in each epoch are organized into three sets (A, B, or C) of 32,768 time slots each. There are 112.5 epochs in a 24 hour period. (Derived from System Segment Specification for JTIDS/MIDS Class 2 Terminal)
Error Correction Encoding	The JTIDS forward error correction encoding function that utilizes Reed-Solomon encoding of data. See Reed-Solomon Code. (System Segment Specification for JTIDS/MIDS Class 2 Terminal)

Error Detection Encoding	An encoding process that allows the detection of a residual message error condition after the error correction function (Reed-Solomon) is executed. The process generates a 12-bit parity code for each block of 225 bits, using a (237, 225) polynomial generator function. (System Segment Specification for JTIDS/MIDS Class 2 Terminal)
Extended Range	The longer of two range options for a JTIDS/MIDS terminal, providing a line-of-sight range capability of 0-500 nautical miles with respect to the allocated propagation for message transmission. (Derived from System Segment Specification for JTIDS/MIDS Class 2 Terminal)
Fine Synchronization	The state of synchronization with system time that allows a terminal to transmit messages. A terminal may utilize a passive or an active synchronization procedure to achieve fine synchronization. (System Segment Specification for JTIDS/MIDS Class 2 Terminal)
Fixed Word Format (FWF)	A 70-bit structure consisting of a formalized arrangement of predefined fields of fixed length and sequence.
Fixed Word Format Message	A J-Series message utilizing fixed word format (FWF). An FWF message is started by an initial word which may be then followed by one or more extension and/or continuation words.
Force Tell	The process whereby data that are being inhibited by a filter are allowed to be transmitted or received. (CJCSM 6120.01)
Forwarding JTIDS Unit (FJU)	A JU that translates and forwards data among IUs using J-series messages and M-Series messages. An FJU is either an FJUA, FJUB, or FJUAB.
Forwarding JTIDS Unit A (FJUA)	A JU communicating on both Link 11 and Link 16 while forwarding information between Link 11 and Link 16 participants.

MIL-STD-6016B

Forwarding JTIDS Unit B (FJUB)	A JU communicating on both Link 11B and Link 16 while forwarding information between Link 11B and Link 16 participants.
Forwarding JTIDS Unit AB (FJUAB)	A JU communicating on Link 16, Link 11, and Link 11B while forwarding information among Link 16, Link 11, and Link 11B participants.
Forwarding Participating Unit (FPU)	A PU that is forwarding data between Link 11 and one or more RUs.
Forwarding Reporting Unit (FRU)	An RU that is forwarding data between two or more RUs.
Free Text Message	Bit-oriented messages whose information bits may be used to represent digitized voice, teletype and other forms of free text information. (System Segment Specification for JTIDS/MIDS Class 2 Terminal)
Geodetic Position Quality (Q_{pg})	A measure of the quality of a JTIDS/MIDS terminal's geodetic position reported in the terminal's Position and Status Reports. Geodetic Position Quality is reported as an integer from 0-15 where the higher numbers correspond to the higher qualities, i.e., lower errors in position. (System Segment Specification for JTIDS Class 2 Terminal)
Handover	The passing of control authority of an aircraft or other air vehicle from one control agency to another control agency. Handover action is complete when the receiving controller acknowledges assumption of control authority. (Derived from MIL-STD-6011)
Header (Message)	The leading bits of each message are coded as a (16, 7) Reed-Solomon code-word that provides 35 bits of information and 45 bits of associated forward error correction code. (System Segment Specification for JTIDS/MIDS Class 2 Terminal)

Information Symbol	A 5-bit data element comprising both information and error detection code (inner parity) bits, or a combination of both. The information bits may represent either Reed-Solomon generated information or non-error-coded information. (System Segment Specification for JTIDS Class 2 Terminal)
Initial Entry	The procedure by which a subscriber terminal becomes a system participant initially and may achieve coarse synchronization with system time. (System Segment Specification for JTIDS/MIDS Class 2 Terminal)
Initial Entry JTIDS Unit (IEJU)	Any JTIDS/MIDS unit that transmits the Initial Entry message in the appropriate time slot.
Initial Slot Number (ISN)	The number assigned to the first time slot in a block of time slots relative to the beginning of an epoch.
Intelligence	The product resulting from the collection, processing, integration, analysis, evaluation, and interpretation of available information concerning foreign countries or areas. (Joint Pub 1-02)
Interface	A boundary or point common to two or more similar or dissimilar command and control systems, subsystems, or other entities against which or at which necessary information flow takes place. (Joint Pub 1-02)
Interface Operating Procedures (IOP)	A document used to provide a functional understanding of data exchange on a Tactical Data Link (TDL) and to describe operator initiated actions and their effect on the exchange of data.
Interface Unit (IU)	A JU, PU, or RU communicating directly or indirectly (i.e., identified as a data source) on the interface.

Interleaving	A pattern of orienting the data symbols of a message for transmission, applicable to Modes 1 and 2. A fixed interleaving pattern is used for Mode 4. (System Segment Specification for JTIDS Class 2 Terminal)
Interoperability	(1) The ability of systems, units or forces to provide services to and accept services from other systems, units or forces and to use the services so exchanged to enable them to operate effectively together. (Joint Pub 1-02) (2) The condition achieved among communications-electronics systems or items of communications-electronics equipment when information or services can be exchanged directly and satisfactorily between them and/or their users. The degree of interoperability should be defined when referring to specific cases. (Joint Pub 1-02) (3) The ability to exchange data in a prescribed manner and the processing of such data to extract intelligible information which can be used to control/coordinate operations.
Jam Strobe	A line projecting from a jammed radar on the approximate azimuth of the jamming source. (MIL-STD-6011)
Joint	Connotes activities, operations, organization, etc., in which elements of more than one Service of the same nation participate. (Joint Pub 1-02)

JTIDS	Joint Tactical Information Distribution System. The JTIDS/MIDS is a joint-service system which provides an Integrated Communications, Navigation, and Identification (ICNI) capability. The JTIDS/MIDS provides a reliable, secure, jam resistant, high-capacity, ICNI capability through the use of direct-sequence, spread-spectrum, frequency-hopping, and error detection and correction techniques. (Derived from System Segment Specification for JTIDS/MIDS Class 2 Terminal)
JTIDS/MIDS Net	One of 128 time-division structures comprising a JTIDS/MIDS network. Each net consists of a continuous stream of time intervals (time slots) with 98,304 time slots per 12.8-minute epoch, during which digital data whose signal characteristics are determined by a cryptographic variable in conjunction with a unique net number are distributed.
JTIDS/MIDS Network	The JTIDS/MIDS structure (usable only with Mode 1 communications) having a total usable capacity of 98,304 time slots per epoch per net and 128 nets. All nets are synchronized so that each time slot of each net is time-coincident with the corresponding time slot (same set and number) of every other net. The signal characteristics of all data distributed within a specified multinetted structure are determined by a cryptographic variable in conjunction with a set of net numbers that define the structure.
JTIDS/MIDS Unit (JU)	A unit communicating directly on Link 16.
Local Data	Data derived from organic sensors and/or the IU's own capabilities to process, analyze, and classify track data, including data received from a remote source on a local track and accepted into the IU's database.

Local Track	A track established within an interface unit based on local positional data. Amplifying data associated with the track may be derived locally, from supporting units, or from data links. (MIL-STD-6011)
Machine Receipt	See Automatic Acknowledgement.
Message	Any thought or idea expressed briefly in a plain, coded, or secret language, prepared in a form suitable for transmission by any means of communications. (Joint Pub 1-02)
Message Standard	A set of protocols consisting of rules, procedures, formats, data element definitions, or other conventions for information exchange and related interactions agreed upon between cooperating systems to ensure interoperability.
Message Translation	The process by which a message or sequence of messages received on one data link is transformed to the appropriate message or message sequence required for transmission on another data link.
Minimum Implementation	The statement of minimum data exchange requirements that must be implemented by Service/Agency systems participating on the Joint Tactical Data Link (TDL) 16 Interface to ensure the continued flow of information. This is defined in terms of requirements that must be met at seven different levels: Functional, Related Function, Message, Related Message, Word, Data Element, and Data Item.
Minimum Information Exchange Requirements	Those categories of information that must be exchanged between operational facilities in order to provide commanders with essential information for decision making.

Mode 1 Communications	Mode 1 JTIDS/MIDS transmissions consist of a sequence of wide-band transmission symbol packets (single pulse, 13-microsecond packets and double-pulse, 26-microsecond packets), the pulses of which are formed by continuous phase shift modulation (CPSM) of the carrier frequency. The signal processing required to transform base-band data to the JTIDS signal waveforms for transmission includes base-band data encryption, forward error correction encoding, error detection encoding, cyclic code shift keying (CCSK) encoding, data symbol interleaving, and the selection of a variable start time.
Mode 2 Communications	Mode 2 JTIDS/MIDS transmissions are identical to Mode 1, except that Mode 2 operates in the narrow-band mode.
Mode 4 Communications	Mode 4 JTIDS/MIDS transmissions have signal waveform characteristics identical to Mode 2, except that Mode 4 does not employ base-band data encryption signal processing.
Navigation Controller	The Navigation Controller establishes the origin and North orientation of the U, V relative grid for the Relative Navigation function. (System Segment Specification for JTIDS/MIDS Class 2 Terminal)
Needline Participation Group	A unique list of netted subscribers compiled without regard to the specific messages they exchange with each other. This list is a means of transmitting any message to a common set of users.
Net	See "JTIDS/MIDS Net."
Net Number	A 7-bit code that identifies each net as a decimal number (0 through 127). (System Segment Specification for JTIDS/MIDS Class 2 Terminal)
Network	See "JTIDS/MIDS Network."

Network Management Concepts	A set of operational concepts that deals with the allocation and assignment of JTIDS/MIDS resources and functions to satisfy user requirements.
Network Management Function	An action or activity affecting the relationships, actions, or activities of the various elements of the network.
Network Management Tools	The procedures employed by a network manager to ensure effective and efficient use of the JTIDS/MIDS message transmission capacity.
Network Manager	A JTIDS/MIDS unit that is designated to employ the required tools to allocate, assign, and manage the JTIDS/MIDS network resources.
Network Participation Group	A unique list of applicable messages used to support an agreed-upon technical function without regard to subscriber identities. This list is a means of transmitting a common set of messages to all interested users.
Network Time Reference (NTR)	A subscriber terminal that is assigned as the reference for system time for each synchronized netted system. The NTR terminal's clock time is never updated by system information and is the reference to which all other terminals synchronize their own clocks. There is only one NTR.
Noncommand and Control JTIDS Unit (nonC ² JU)	A JU without command and control capability.
Normal Mode	The standard mode of terminal operation with respect to receipt and transmission of messages. (System Segment Specification for JTIDS/MIDS Class 2 Terminal)

Normal Range	The shorter of two range options for a JTIDS/MIDS terminal, providing a line-of-sight coverage capability of 0-300 nautical miles with respect to the allocated propagation for message transmission. (Derived from System Segment Specification for JTIDS/MIDS Class 2 Terminal)
Order	A communications which is written, oral, or by signal, that conveys instructions from a superior to a subordinate. (DOD IADB) In a broad sense, the terms "order" and "command" are synonymous. However, an order implies discretion as to the details of execution whereas a command does not. (Joint Pub 1-02)
Pairing	The establishment of an operational relationship (other than an engagement) between a friendly track and another track or point.
Parity Symbol	A 5-bit error-correction code data element generated by the Reed-Solomon encoding process. (System Segment Specification for JTIDS/MIDS Class 2 Terminal)
Participating Unit (PU)	A unit communicating directly on Link 11. (MIL-STD-6011)
Participation Group Community (PGC)	The set of JUs assigned to participate as transmitters and/or receivers in the corresponding participation group.
Participation Group Pool	One or more time slot blocks assigned to a given participation group to satisfy participation group needs, priorities, and functional characteristics.
Passive Synchronization	A procedure used by a terminal to effect and maintain fine synchronization with system time by passive observations of Position and Status messages transmitted by other terminals. The synchronizing terminal is not required to transmit any information. (System Segment Specification for JTIDS/MIDS Class 2 Terminal)

Perimeter Engagement	The unit is initiating multiple simultaneous engagements with no capability to perform independent kill assessment. However, W/ES values of Firing and Engagement Broken will be automatically transmitted for each missile/target pair.
Polling Mode	A mode of terminal operation whereby the terminal can receive messages but does not transmit any fixed format messages except to transmit automatic message acknowledgments, RTT interrogations, or other messages in response to special interrogations. (System Segment Specification for JTIDS/MIDS Class 2 Terminal)
Pool	One or more time slot blocks that can be used to satisfy a particular functional requirement or the total JTIDS/MIDS capacity that can be divided into pools to satisfy all functional requirements.
Position Reference	One or more JUs designated as a network reference. Such a JU has maintained a geodetic position accuracy of 50 feet, one sigma (standard deviation) over a long period of time.
Primary User	A subscriber terminal that utilizes the active synchronization (RTT) procedure and serves as a high-quality source for synchronization by the general Relative Navigation community. (System Segment Specification for JTIDS/MIDS Class 2 Terminal)
Pulse (JTIDS/MIDS)	A 6.4-microsecond burst of carrier frequency continuous phase shift modulated at a 5-megabit-per-second rate by the transmission symbol. (System Segment Specification for JTIDS/MIDS Class 2 Terminal)
Purge	Removal from database in response to internal system criteria.

Radio Relaying	A function for extending radio coverage based on time delay relaying where a message received during one time slot is subsequently retransmitted in another time slot. (System Segment Specification for JTIDS/MIDS Class 2 Terminal)
Radio Silence Mode	A mode of terminal operation where the terminal receives but does not transmit fixed word format or variable message format messages. (Derived from System Segment Specification for JTIDS/MIDS Class 2 Terminal)
Receive Block	A time slot block assigned for message reception.
Receipt/Compliance	The acknowledgment of a message and/ or an indication of intent to respond to a message, either by machine acknowledgment or operator action.
Recurrence Rate	The total number of time slots per epoch assigned (or deleted) in a single time block assignment, specified as an integer, $R = 0$ to 15 where 2^R = the number of time slots. (System Segment Specification for JTIDS/MIDS Class 2 Terminal)
Recurrence Rate Number (RNN)	An integer R , $0 < R < 15$, where 2^R is the recurrence rate of the block assignment.
Reed-Solomon Code	As applied to JTIDS/MIDS, a forward error correction encoding scheme using a 32-ary cyclic block code in the class of generalized Bose-Chaudhuri-Hocquenghem (BCH) codes where the basic block codeword is a (31, 15)codeword, i.e., 31 5-bit data symbols per codeword, of which 15 are information symbols and 16 are parity symbols. Message headers are (16,7) codewords which are shortened (31,15) codewords where 7 are information symbols and 9 are parity symbols. (System Segment Specification for JTIDS/MIDS Class 2 Terminal)

Relative Azimuth Quality (Q_{ar})	A measure of the quality of a terminal's estimate of the orientation of the U,V grid with respect to grid North. Relative Azimuth Quality is reported in the terminal's Position and Status Reports as an integer from 0-7, where the higher numbers correspond to the higher qualities, i.e., lower errors in angular orientation. (System Segment Specification for JTIDS/MIDS Class 2 Terminal)
Relative Common Grid	A rectilinear planar grid tangent to the Earth surface at the grid origin whose coordinates are U, V Cartesian coordinates, where the V-axis is the North-South axis and the U-axis is the East-West axis. (System Segment Specification for JTIDS/MIDS Class 2 Terminal)
Relative Navigation	A procedure used by a terminal to determine its position and velocity in a common reference coordinate system by passive observations of Position and Status messages transmitted by other terminals. (System Segment Specification for JTIDS/MIDS Class 2 Terminal)
Relative Position Quality (Q_{pr})	A measure of the quality of a terminal's relative position with respect to the U, V relative grid. Relative Position Quality is reported in the terminal's Position and Status Reports as an integer from 0-15, where the higher qualities, i.e., less error in position. (System Segment Specification for JTIDS/MIDS Class 2 Terminal)
Relay	An automatic function of the JTIDS/MIDS terminal that provides retransmission of received information to extend the range beyond line of sight.

Relay Block	One to 64 time slot blocks assigned to independently specified nets for the relay of messages. The number of time slots selected for message reception must equal the number of time slots selected for message transmission. Each block is described by set (A, B, or C), a specific time slot in the block, and the recurrence rate.
Remote Data	Data derived from data link reports from another unit.
Remote Track	A track established within an interface unit based upon positional information derived from a data link report or reports. Amplifying data associated with the track may be derived locally, from supporting units, or from data links. (MIL-STD-6011)
Reporting Responsibility (R^2)	The requirement for the IU with the best positional data on a track to transmit track data on the interface.
Reporting Unit (RU)	A unit communicating on a point-to-point data link (e.g., Link 11B) which can be identified as a data source (MIL-STD-6011)
Repromulgation	The rebroadcast of a specified message or messages. The repromulgation request field specifies the number of times the message should be relayed and the time slot in which it is to be broadcast.
Response Time End-to-End Response Time	The time from new information availability at the source JU to reception of the message at the destination JU.
JU Response Time	The time from new information availability at the JU to the transmission of the information on the link. This is defined for each message in the JTIDS TIDP-TE.
Terminal Response Time	The time from new information availability at the terminal to the transmission of the information on the link. This time is part of the JU response time.

Round-Trip-Timing (RTT)	The process used by a JTIDS/MIDS terminal to directly determine the offset between its clock and that of another JTIDS/MIDS terminal. This is used to achieve and maintain fine synchronization and to improve the terminal's time quality. This process involves the exchange of RTT Interrogation and Reply Messages.
RTT Message	A short, 35-bit message used by the Active synchronization method, either an RTT Interrogation Message or RTT Reply Message. (System Segment Specification for JTIDS/MIDS Class 2 Terminal)
Secondary User	The general category for the majority of system subscriber terminals. Secondary user terminals generally utilize the Passive synchronization procedures for synchronizing in the Relative Navigation community. (System Segment Specification for JTIDS/MIDS Class 2 Terminal) Secondary users may use RTT messages when improved time quality is needed to maintain position quality.
Stacked Net	The coordinated use of specific blocks of time slots on different nets in a JTIDS/MIDS network by different communities of users.
Static Network Management	Management of the network in accordance with a preplanned scheme not subject to changes by a network manager during operations.
Subscriber	A participant in the use of the system, either actively (transmission of information) or passively (receiver of information only), or both. (System Segment Specification for JTIDS/MIDS Class 2 Terminal)
Supporting Unit (SU)	A unit supporting an IU and providing data for the interface, but not identified as a data source. (Derived from MIL-STD-6011)

Symbol Packet	A signal element containing either one (single-pulse symbol packet) or two (double-pulse symbol packet) 6.4-microsecond pulses. The single-pulse packet (13 microseconds) consists of a 6.4-microsecond pulse followed by a 6.6-microsecond interval of dead time; the double pulse packet (26 microseconds) consists of two 6.4-microsecond pulses separated and followed by 6.6-microsecond interval of dead time. (System Segment Specification for JTIDS/MIDS Class 2 Terminal)
Synchronization Preamble	Sixteen symbol packets that preface each transmitted message to allow for the detection of the beginning of each message and the subsequent decoding of the entire message. (System Segment Specification for JTIDS/MIDS Class 2 Terminal)
Systematic Code	A code having the characteristic that each information block is encoded into a codeword comprised of "n" symbols in such a way that the first "k" symbols of the codeword are exactly the same as the information block and last "n-k" symbols of the codeword are redundant symbols which are functions of the information symbols. (System Segment Specification for JTIDS/MIDS Class 2 Terminal)
Tactical Command and Control	The exercise of authority and direction by a properly designated commander over assigned forces in the accomplishment of his mission. Tactical command and control functions are performed through an arrangement of personnel, equipment, communications, and procedures which are employed by a commander in planning, directing, coordinating, and controlling forces and operations in the accomplishment of his mission. (Joint Pub 1-02)

MIL-STD-6016B

Tactical Command and Control System	The facilities, equipment, communications, procedures, and personnel essential to Theater-Level and commanders Below-Theater-Level for planning, directing, and controlling operations of assigned and attached forces pursuant to the missions assigned and which provide for the conveyance and/or exchange of data and information from one person or force to another. (Joint Pub 1-02)
Automated Tactical Command and Control System	A command and control system or part thereof which fully manipulates the movement of information from source to user without human intervention. (Automated execution of a decision without human intervention is not mandatory.) (Joint Pub 1-02)
Semiautomated Tactical Command and Control System	A machine-aided command and control system wherein human intervention is required in varying degrees to operate the system. (Joint Pub 1-02)
Manual Tactical Command and Control System	A command and control system that acquires, processes, and passes information generated by man at the source and is received, processed, and acted upon by manual means. (Joint Pub 1-02)
Tactical Digital Information Link (TADIL)	A JCS approved standardized communications link suitable for transmission of digital information. A data link is characterized by its standardized message formats and transmission characteristics.
TADIL A	A secure, netted data link utilizing parallel transmission frame characteristics and standard message formats at either 2250 or 1364 bits per second. Transmission characteristics and standards for Link 11 are set forth in MIL-STD-6011 and MIL-STD-188-203-1A.

MIL-STD-6016B

TADIL B	A secure, point-to-point data link utilizing serial transmission frame characteristics and standard message formats at a basic speed of 600 or of 1200 bits per second. This data link interconnects tactical air defense and air control units. Transmission characteristics and standards for Link 11 are set forth in MIL-STD-6011 and MIL-STD-188-212. Message formats are the same for Link 11B and Link 11.
TADIL C	A time division data transmission link between control station and controlled aircraft. It provides the capability for automatic transmission of orders, status, and other information. Data exchange is accomplished on a fully automatic link at 5000 bits per second, using serial transmission. Transmission characteristics and standards for Link 4A are set forth in MIL-STD-6004 and MIL-STD-188-203-3.
TADIL J	A secure, jam-resistant, nodeless data link which utilizes the Joint Tactical Information Distribution System, and the protocols, conventions and fixed word message formats defined by the MIL-STD-6016.
Link 16 Interface	The tactical data exchange interface comprised of three basic components: participating JUs, the Link 16 Message Standard, and Voice Coordination Nets/Circuits. The interface may be connected via data forwarder(s) to a JTA0 interface (i.e., Link 11 and/or Link 11B).
Link 16 Message	A functionally oriented, variable length string of one or more 70-bit words in either fixed word format or variable message format.

Technical Interface Concepts (TIC)	A document used to establish the conceptual foundation for the design, implementation, and test documentation for the general development of the Joint Chiefs of Staff (JCS) program for ensuring compatibility, interoperability, and operational effectiveness of tactical command and control operational facilities/systems. A TIC identifies: (a) tactical command and control systems and operational facilities of the Services/Agencies. (b) joint interface points, either manual or digital; and (c) inter-Service/Agency information to be exchanged among automated and manual tactical command and control systems.
Technical Interface Design Plan (TIDP)	An engineering implementation plan that specifies the technical standards required to achieve compatibility and interoperability as specified in the Technical Interface Concepts. The plan includes a comprehensive technical description of the operational interface, message implementation, methods, and rules for processing data between operational facilities and a final list of effective Service/Agency facilities/systems.
Terminal (JTIDS/MIDS)	The integrated equipment comprised of hardware, firmware, and software elements used as the means for participating as a system subscriber. (System Segment Specification for JTIDS/MIDS Class 2 Terminal)
Test Mode	A mode of terminal operation whereby a terminal is required to transmit Test messages. (System Segment Specification for JTIDS/MIDS Class 2 Terminal)

Time (System)	The time maintained by the terminal assigned as the Network Time Reference (NTR) to which all other participating terminals are synchronized. (System Segment Specification for JTIDS/MIDS Class 2 Terminal)
Time (Terminal)	The estimate of time derived by a terminal as a result of executing either the active or a passive synchronization procedure. (System Segment Specification for JTIDS/MIDS Class 2 Terminal)
Time Quality (Q_t)	A measure of the quality of a terminal's state of synchronization with system time reported in the terminal's Position and Status Report. Time Quality is reported as an integer from 0-15 where the higher numbers correspond to the higher levels of quality, i.e., lower errors in timing. (System Segment Specification for JTIDS/MIDS Class 2 Terminal)
Time Refinement Symbols	Four transmission symbols added to each message after the synchronization preamble symbols to provide for measuring accurate time-of-arrival of messages. (System Segment Specification for JTIDS/MIDS Class 2 Terminal)
Time Slot	A 7.8125-millisecond time interval during which messages may be transmitted. (System Segment Specification for JTIDS/MIDS Class 2 Terminal)
Time Slot Assignment	The designation to the terminal of the specific time slot block in which it will transmit or receive messages.
Time Slot Block	A collection of time slots spaced uniformly in time over each epoch and belonging to a single time slot set. A block is defined by indexing time slot number (0 to 32,767), set (A, B, or C), and a recurrence rate number (0 to 15).

Time Slot Number	A 17-bit code that identifies each full time slot. The code consisting of a 2-bit set field (set A, B, or C) and a 15-bit slot field representing the decimal numbers zero to 32,767. (System Segment Specification for JTIDS/MIDS Class 2 Terminal)
Time Slot Reallocation	A transmit access mode in which each Access Mode participant periodically assigns itself time slots from a shared pool of time slots. A participant assigns transmit time slots after transmitting a Time Slot Reallocation (TSR) message and receiving TSR messages from other participants.
Time Slot Reuse	A method to increase the JTIDS/MIDS network capacity by allowing more than one terminal to transmit in a single time slot on a single net number. This is appropriate for JUs in proximity to each other that have information to exchange; receivers will lock onto the message with the shortest time of arrival.
Time Slot Separation	The interval between time slots in an epoch assigned to a block expressed in terms of R (R = RRN), where the separation between time slots = $3 \times 2^{15-R}$.
Track	(1) The graphic and/or alphanumeric representation of an object, point, or bearing whose position and/or characteristics are collated from sensors and/or other data sources. (MIL-STD-6011) (2) A collated set of data...associated with a track number for the purpose of representing the position and/or characteristics of a specific object, point, or bearing. (MIL-STD-6011).
Track Quality	A measure of the reliability of the positional information of a reported track.

Transmit Block	A time slot block assigned for the transmission of messages.
Transmission Symbol	A 32-bit sequence, one of 32 possible sequences generated by cyclic code shift keying, having a direct correlation with a 5-bit data symbol for the purpose of direct sequence spectrum spreading. (System Segment Specification for JTIDS/MIDS Class 2 Terminal)
Variable Message Format (VMF)	A message structure using predefined fields of fixed length employing internal syntax and a header extension. The internal syntax specifies the presence, absence, and recurrence of fields as selected by the user.
Variable Message Format Message	A Link 16 message utilizing variable message format.
Word Format	The type of Link 16 word construction. There are four such types: initial, extension, continuation, and variable message format.

3.3 JTIDS/MIDS TECHNICAL CHARACTERISTICS

JTIDS/MIDS is a high-capacity, digital information distribution system providing integrated communications, navigation and identification capabilities. It provides secure, flexible, and jam-resistant information transfer in real time among the dispersed and mobile units characteristic of modern armed forces. JTIDS/MIDS combines characteristics designed to overcome many of the limitations common to existing systems by providing for increased system capacity and coverage, improved connectivity, survivability, jamming resistance, and reduced danger of data loss and data obsolescence.

The following discussion focuses on the JTIDS/MIDS Time Division Multiple Access (TDMA) architecture (nets and time slots) and the basic features of the JTIDS/MIDS TDMA communication network, including network protocol, transmission procedures, participation groups and messages.

3.3.1 JTIDS/MIDS TDMA ARCHITECTURE

The TDMA architecture's basic element is a single communication circuit or net that is shared by many users. The net is subdivided into time slots that can be assigned to individual JTIDS/MIDS participants (called JTIDS Units (JUs)) for transmitting messages. Capacity can be expanded further by simultaneous operation on several nets. In general, a JU operates only on a single net at a time but it can switch nets on a time-slot-by-time-slot basis.

All JUs are required to operate in the TDMA network and to process the "Standard Double Pulse (DP)", "Packed-2 Single Pulse (SP)", "Packed-2 DP", "Packed-4 SP" and "Round-Trip-Timing (RTT)" message packing structures (see paragraph 3.3.9).

Any JU can transmit Standard DP, Packed-2 SP, Packed-2 DP, Packed-4 SP or RTT message packages in each time slot. The distinction between the five packing structures lies in the number of pulses transmitted, whether one or two pulses represents a data symbol and, consequently, how much data are transmitted in a time slot. JUs can transmit messages in an error correction codeword format in which error correction coding is used by receivers to correct errors caused by noise or jamming. All data in correctable codewords

are error free. All data in uncorrectable codewords are rejected. Link 16 information is transmitted error correction coded. Messages also may be transmitted in a non-error coded message packing structure.

A JU can transmit or receive one Standard DP, Packed-2 SP, Packed-2 DP, or Packed-4 SP message packing structure in a time slot. A JU can alternatively transmit one RTT interrogation message in a time slot and then receive an RTT reply to that message in the same time slot. If a JU receives an RTT interrogation message for which it is a valid responder, it will then transmit an RTT reply message in the same time slot. A JU can switch between transmit and receive modes on a time-slot-by-time-slot basis in accordance with its time slot assignments.

3.3.1.1 SINGLE-NET ARCHITECTURE

Figure 3.3-1 illustrates the single-net architecture. System operation divides time into 12.8-minute intervals, called epochs, with 112.5 epochs per 24-hour day. Each epoch is further divided into 7.8125-millisecond intervals, referred to as time slots (or slots) so that there are 98,304 slots per epoch. The time slots are organized into three sets (A, B, and C) of 32,768 slots per set. The slots in each set are numbered from 0 to 32,767 so that each slot is identified by its slot number and set, e.g., 0A. The slots are distributed in time within each epoch so that time slot "n" of Set A follows time slot "n-1" of Set C and precedes time slot "n" of Set B, where "n" is the set of integers in the sequence 0 to 32,767.

3.3.1.2 MULTINET ARCHITECTURE

JTIDS/MIDS system capacity can be expanded by simultaneous operation on several nets. Multiple-net operation (see paragraph 3.3.6) is accomplished by assigning independent frequency-hopping patterns for each net to the pulses used to convey Link 16 information. A JU can operate on only one net in a single time slot, but it can switch nets on a time-slot-by-time-slot basis.

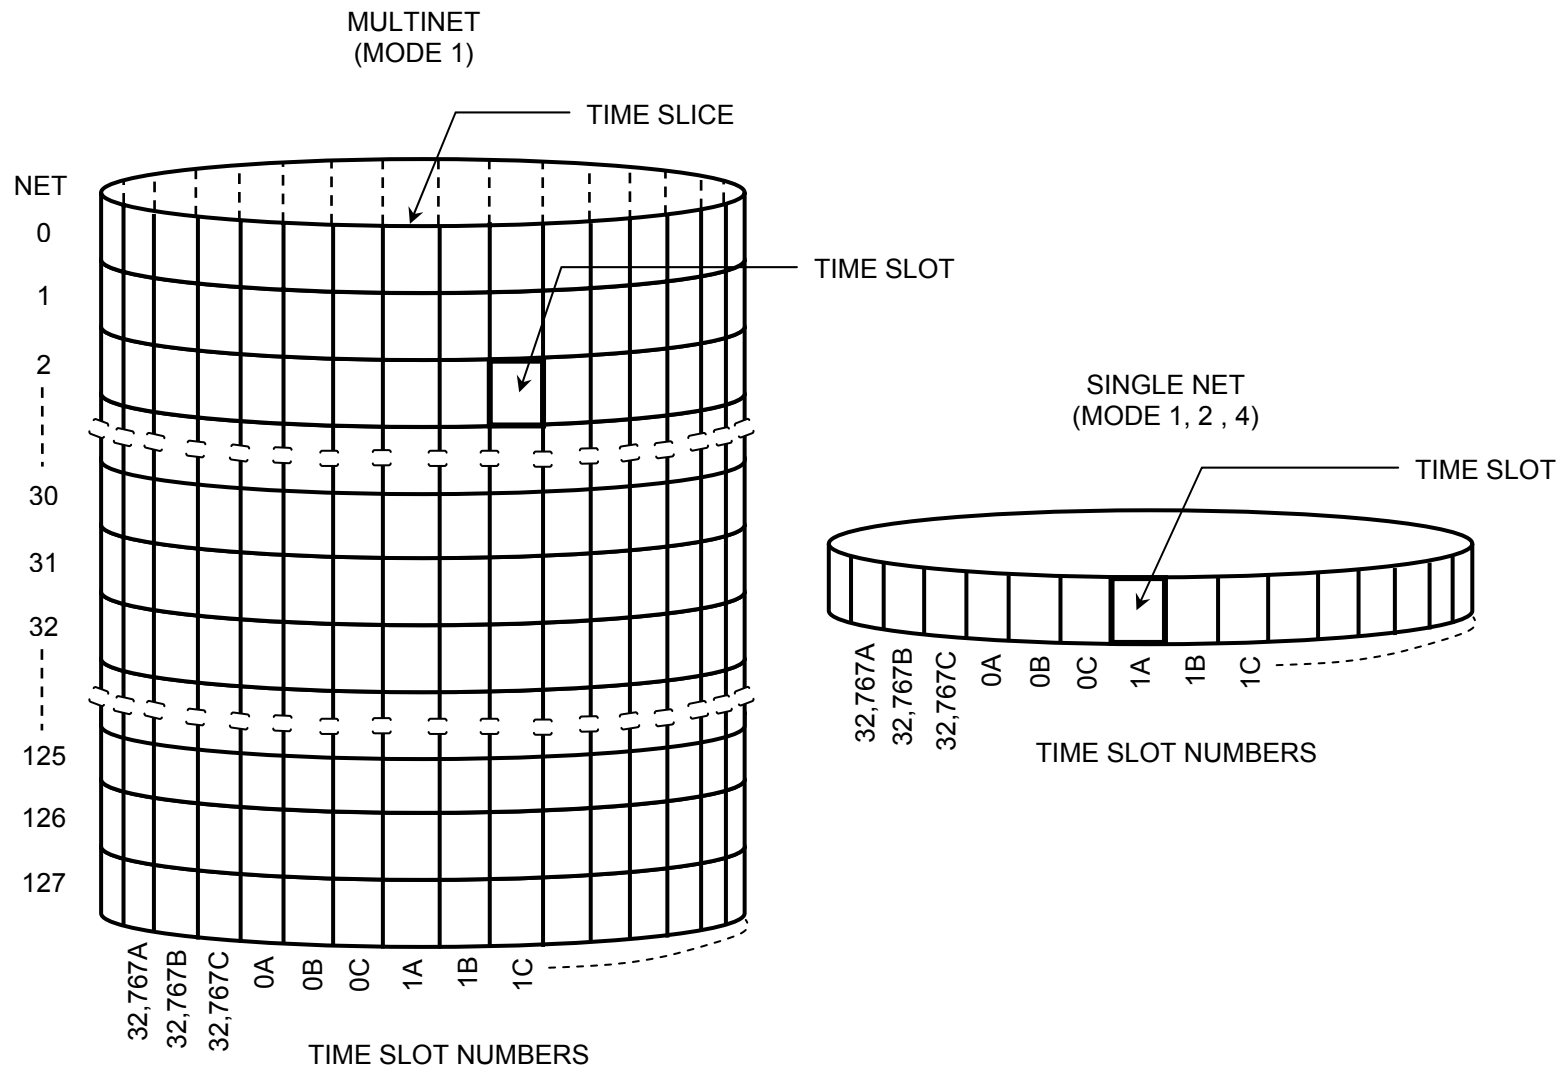


FIGURE 3.3-1. JTIDS/MIDS TDMA Architecture

3.3.2 JTIDS TDMA COMMUNICATIONS NETWORK

Functionally, the TDMA architecture is configured to provide a communication structure or network composed of multiple participation groups for network maintenance and information exchange. Appropriate protocols are provided for establishment and maintenance of the network and the protocols for control of information exchange on the network.

3.3.2.1 SYSTEM TIMING AND SYNCHRONIZATION

To maintain the TDMA discipline, JUs must be synchronized with a common network time. Network time is that time maintained by a particular JU designated as the Network Time Reference (NTR) and is the common time reference with which all other JUs synchronize. Synchronization consists of making corrections to the clock maintained in each JU and is performed in four steps; (1) initial net entry, (2) coarse synchronization, (3) fine synchronization, and (4) synchronization maintenance. These steps are performed automatically and depend only on the exchange of messages directly with the NTR or with other JUs that have synchronized with network time.

Any JU is capable of operating as the NTR. When designated as the NTR, a JU assumes its clock is correct and does not adjust its clock based on network operation (i.e., fine synchronization). There are provisions for an operator-initiated adjustment to system time by the NTR. Such an adjustment is a coordinated operation that involves the simultaneous adjustment of the clocks in the NTR and all other JUs. When a JU is not operating as the NTR, it is designated as a primary or secondary user. Primary users use the active mode and secondary users use the passive mode for achieving fine synchronization. A secondary user may use the active mode for achieving fine synchronization under certain circumstances. The steps involved in synchronization are discussed below.

3.3.2.2 NET ENTRY

To achieve initial net entry, a JU searches for and receives a valid net entry message. In communication modes 1 and 2, the terminal searches for a net entry message during a time interval that is determined by its amount of uncertainty of the estimate of system time. If the terminal fails to receive

a valid net entry message during that interval, it repeats the process, expanding the uncertainty window by a predetermined method. In communication mode 4, net entry is completed upon the reception of any valid JTIDS/MIDS message.

3.3.2.3 COARSE SYNCHRONIZATION

To achieve coarse synchronization, a JU must adjust its clock so that it can identify time slots (set and number) and identify the start of time slots with sufficient accuracy to receive any message and perform the active mode of fine synchronization. Except for RTT Interrogation messages, a JU is not permitted to transmit until it has achieved fine synchronization. Coarse synchronization is performed by receiving an error-free Initial Entry message and using the time of arrival of the Initial Entry message to adjust the JU's clock. When operating in communication mode 4 (refer to paragraph 3.3.6), the Initial Entry message includes information identifying the time slot in which it was transmitted. When operating in communication mode 1 or 2, a JU is able only to decrypt the Initial Entry message received in a predefined time slot. When operating in communication modes 1 or 2, a JU must be initialized with the following parameters:

- a. Code of the day.
- b. Estimate of system time and an indication of the uncertainty in the estimate of time.
- c. Source track number.

3.3.2.4 FINE SYNCHRONIZATION

Upon achieving coarse synchronization, a JU automatically begins the fine synchronization process, either actively or passively. This process is completed when a JU can predict system time with a specified accuracy. Upon achieving fine synchronization, a JU begins receiving and transmitting messages subject only to the constraints imposed by its assigned transmit mode and participation groups. The active and passive modes for achieving fine synchronization are discussed below.

3.3.2.4.1 ACTIVE MODE

The active mode uses RTT based on the RTT Interrogation and Reply messages (discussed in paragraph 3.3.10). Figure 3.3-2 illustrates the RTT process. The interrogating JU transmits an RTT Interrogation message and determines the associated RTT Reply message's Time Of Arrival (TOA_R). The interrogating JU then computes its clock correction based on the measured value of TOA_R and the value of TOA_I included in the RTT Reply message. This process is independent of the JTIDS/MIDS relative navigation function since own-position data are not required.

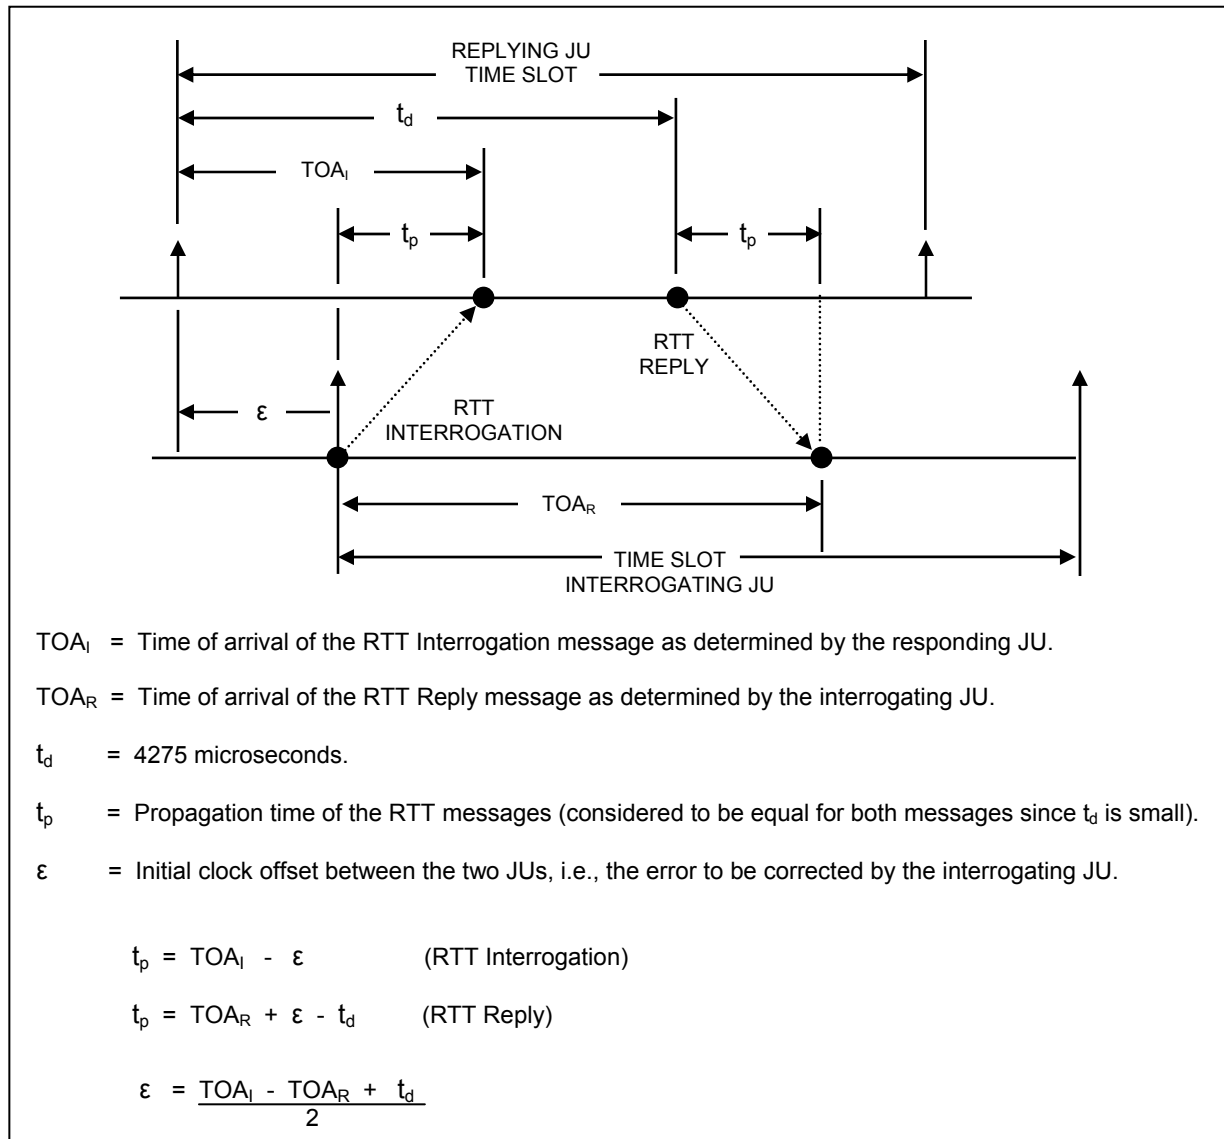


FIGURE 3.3-2. General RTT Algorithm

The RTT Interrogation message may be addressed to a specific JU (RTT-A Interrogation message) or unaddressed (RTT-B Interrogation message). In the latter case, a JU determines from received position reports that other units exist with time quality exceeding own-unit time quality. An interrogation message is transmitted on the net whose net number is equal to the highest time quality contained in any received position report. JUs with a time quality equal to the time quality specified in the RTT Interrogation message respond with an RTT Reply message on the net number equal to the time quality.

3.3.2.4.2 PASSIVE MODE

In the passive mode a JU simultaneously adjusts its clock and its estimate of own position (see paragraph 3.3.8) until it determines that its clock is operating within the required tolerance. The JU measures the Time Of Arrival (TOA) of error-free PPLI messages from selected JUs and combines multiple TOA measurements through a recursive filter process to determine corrections for its clock and adjustment to its own-position estimate. An estimate of own position and an estimate of position quality are required for the passive mode. A JU selects the JUs to be used in the passive mode on the basis of the time and position quality values in received PPLI messages.

3.3.2.4.3 SYNCHRONIZATION MAINTENANCE

After achieving fine synchronization JUs continue to monitor clock performance through the outputs of the filter process and perform the fine synchronization process (active or passive) as necessary to maintain synchronization with system time. If clock errors exceed predefined limits, a JU inhibits message transmission (except RTT Interrogation messages) and initiates the fine synchronization process.

3.3.3 TRANSMISSION PROCEDURES

The following paragraphs discuss the format of JTIDS/MIDS transmissions and the steps involved in preparing messages for transmission.

3.3.3.1 TRANSMISSION STRUCTURE

Figure 3.3-3 illustrates the basic JTIDS/MIDS transmission structure for RTT messages and data messages. The structure consists of the following parts:

a. Jitter. A variable time delay in the start of transmission in a time slot. Jitter is not employed when operating in communication mode 4; when RTT messages are transmitted or when transmitting messages in the Packed-2 DP or Packed-4 message packing structures (see paragraph 3.3.9.1).

b. Synchronization. A pattern of 16 DP symbol packets that allows receiving JUs to synchronize to the transmission. The pattern is changed

from time slot to time slot, and within a time slot the pattern is different among nets.

c. Time Refinement (TR). A fixed pattern of four DP symbol packets used for TR.


d. Header (HDR). A header word (see paragraph 3.3.9.3) that provides information concerning the message(s) transmitted in a time slot.

e. Data. Message(s) transmitted in the time slot (see paragraph 3.3.9).

f. Propagation/Guard. A time period that allows for the propagation of the signal to the maximum range and time for JUs to prepare for transmissions in the next time slot. The propagation/guard time is selectable for a maximum range of 300 nautical miles (normal) or 500 nautical miles (extended).

3.3.3.2 TRANSMISSION SIGNAL GENERATION

The steps involved in preparing a message for transmission are illustrated in Figure 3.3-3 and discussed in the following paragraphs.

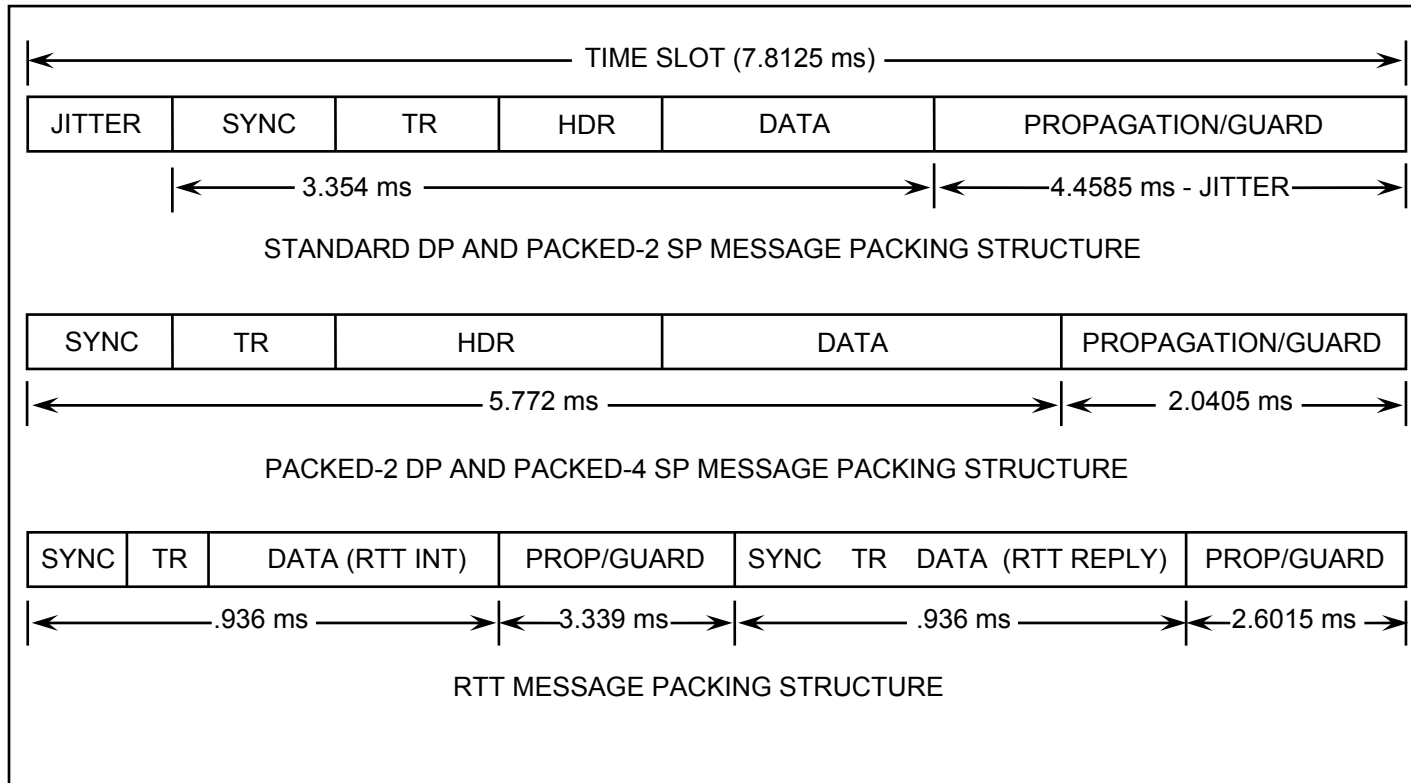

Legend:

HDR	- Header	ms	- Millisecond
INT	- Interrogation	SYNC	- Synchronization
PROP	- Propagation	TR	- Time Refinement

FIGURE 3.3-3. JTIDS/MIDS TDMA Message Packing Structure

3.3.3.2.1 ERROR DETECTION ENCODING

For fixed and variable format messages, prior to Reed-Solomon encoding, twelve error detection parity bits are to be generated for each block of 210 data bits. This is done by using a (237, 225) polynomial code having the generating polynomial $G(X) = 1 + X^{12}$ where the "+" indicates module-2 addition over each block of 225 bits. The 225 bits include the 15 bits constituting the Track Number, Source field in the header word and the 210 data bits. The 12 parity bits are divided into three groups of four bits and a zero bit is added to the beginning of each four bits to fill the parity byte. The bytes are then combined with 70 data bits to create 75-bit words. The parity byte appears in bit positions 70 through 74 of each word.

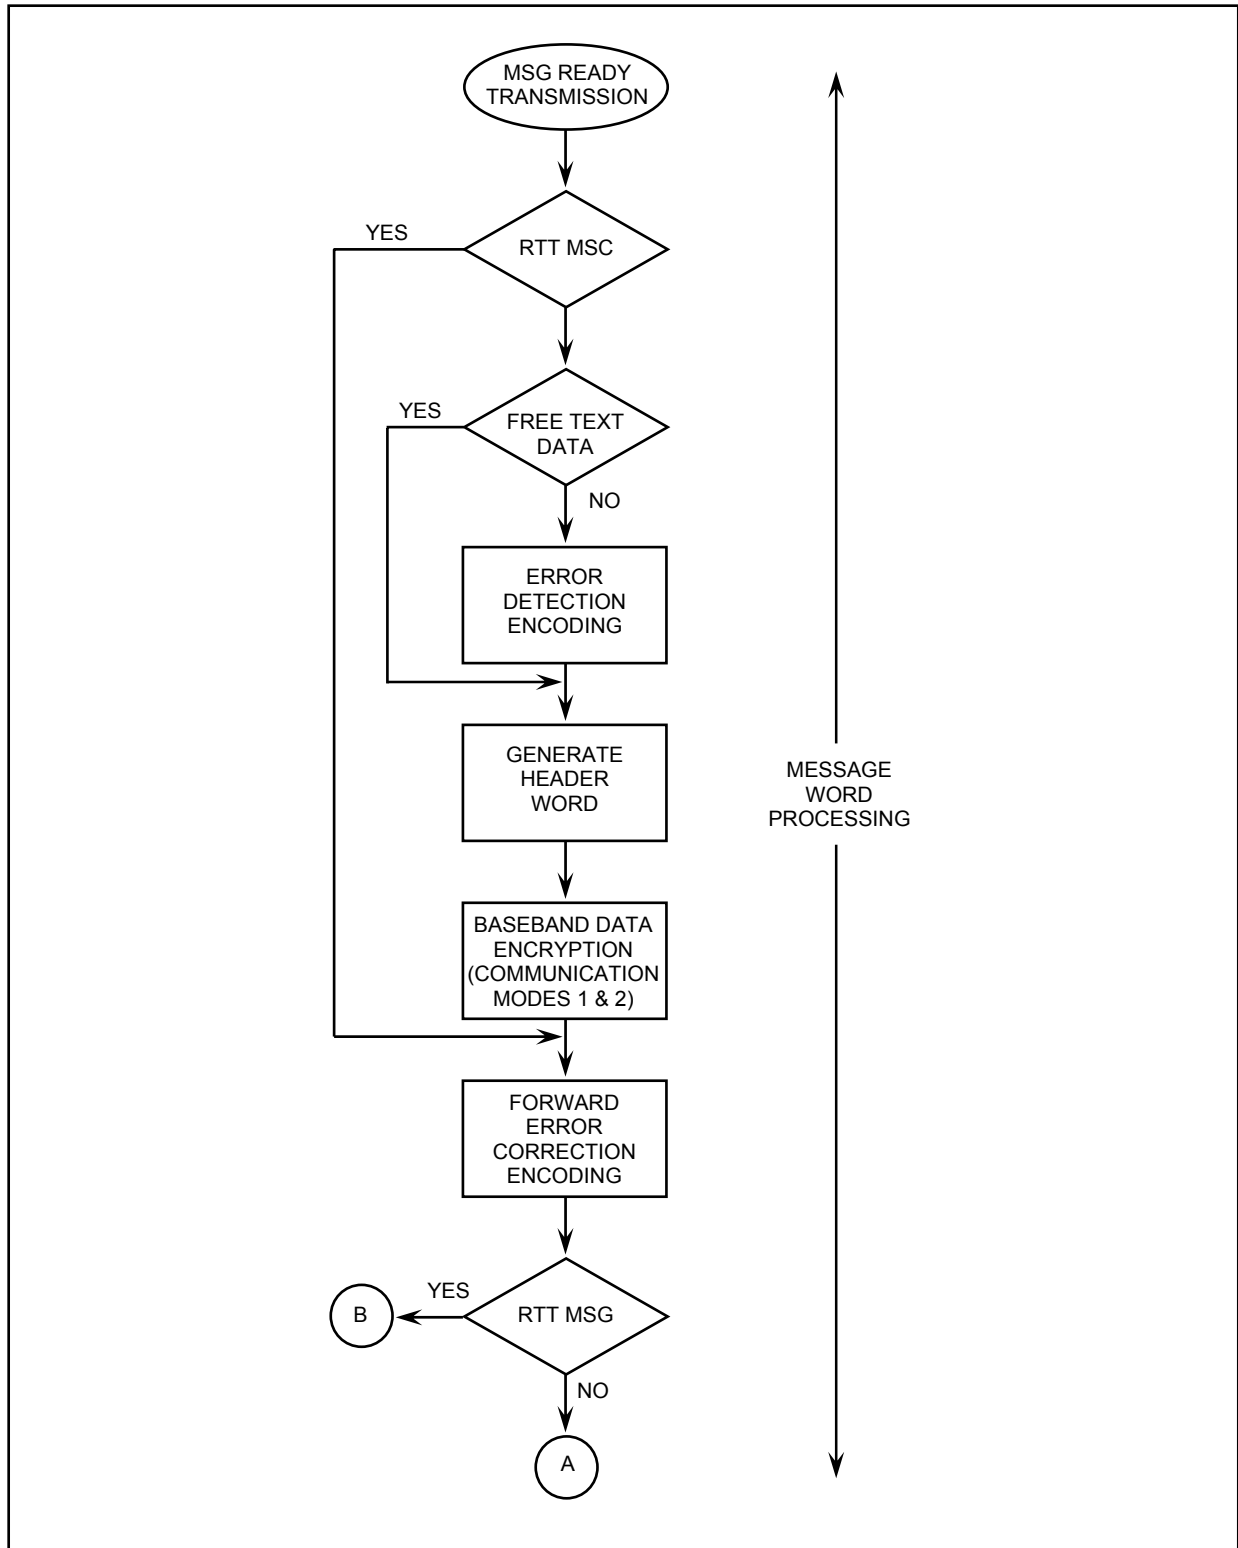


FIGURE 3.3-4. Transmission Signal Generation (Sheet 1 of 2)

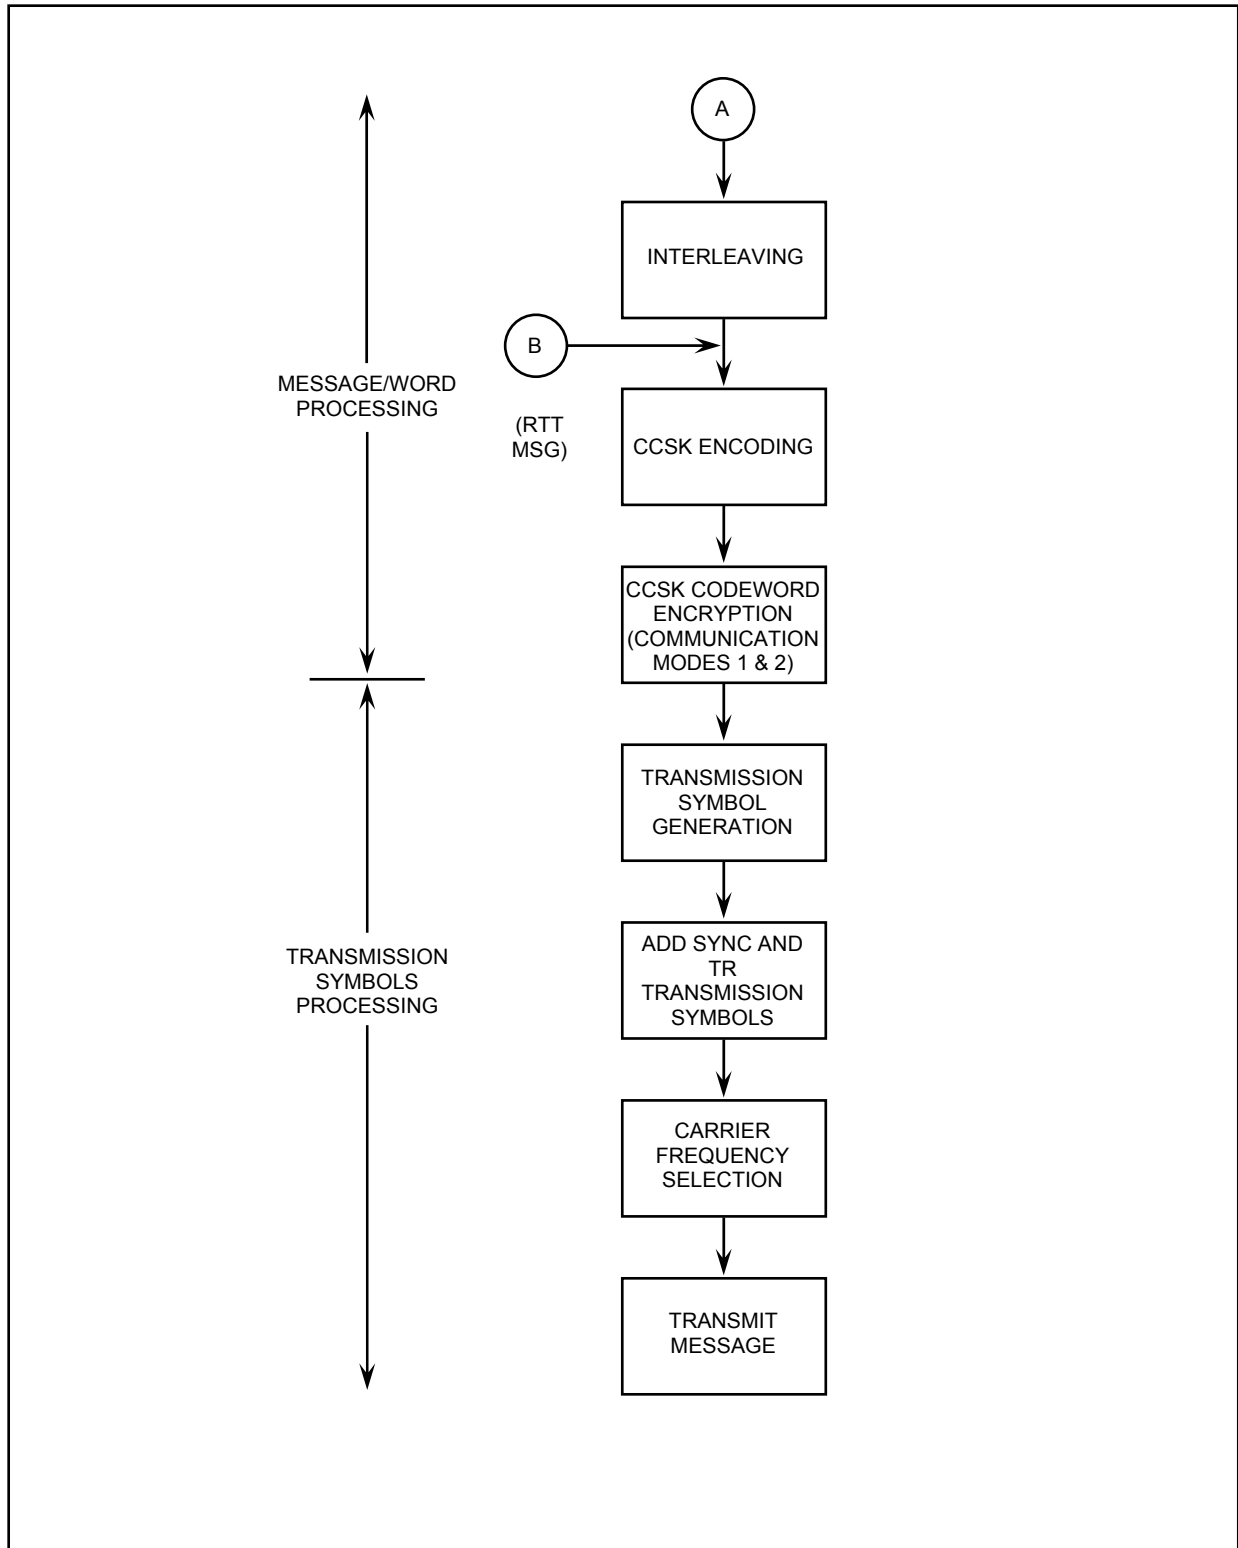


FIGURE 3.3-4. Transmission Signal Generation (Sheet 2 of 2)

3.3.3.2.2 ENCRYPTION

In communication modes 1 and 2 baseband data and cyclic code shift keying (CCSK) codewords are encrypted.

3.3.3.2.3 FORWARD ERROR CORRECTION ENCODING

The header word, fixed and variable format messages, and selected free-text messages are encoded using a Reed-Solomon code. The Reed-Solomon code is a 32-ary cyclic block code in the class of generalized Bose-Chaudhuri-Hocquenghem (BCH) codes. The Reed-Solomon encoding process converts the 35-bit header word into a (16, 7) Reed-Solomon codeword. The (16, 7) codeword contains 16 five-bit bytes, of which seven bytes contain data (35 bits of header) and nine bytes contain parity bits. The 75-bit words comprising messages are individually encoded as (31, 15) Reed-Solomon codewords. The (31, 15) codeword contains 31 five-bit bytes, of which 15 bytes contain data and 16 bytes contain parity bits. The (31, 15) and (16, 7) codewords can be encoded and decoded by the same logic.

3.3.3.2.4 INTERLEAVING

In communication modes 1 and 2, the sequence of five-bit symbols comprising the Reed-Solomon encoded header word and the five-bit symbols comprising the data of the Standard DP and Packed-2 SP message packing structure is transmitted in a predetermined random order. The header symbols are interleaved among the data symbols. The header and data symbols of the Packed-2 DP and Packed-4 SP message packing structures are also transmitted in a predetermined random order. In all four message packing structures, the header symbols are transmitted in the same pulse position.

3.3.3.2.5 CYCLIC CODE SHIFT KEYING ENCODING


CCSK encoding is applied to the five-bit bytes comprising the Reed-Solomon encoded header word and message(s) after the bytes have been interleaved (if required). Table 3.3-1 illustrates the relationship between the five-bit bytes and the CCSK codewords. The 32-bit CCSK codeword for a byte is generated by left-cyclic shifting the initial CCSK codeword (S_0) n times, where n equals the value (0-31) of the byte being encoded.

TABLE 3.3-1. Cyclic Code Shift Keying Codewords


<u>Five-Bit Byte</u>	<u>CCSK Codeword (32 Bits)</u>
00000	$S_0 = 01111100111010010000101011101100$
00001	$S_1 = 11111001110100100001010111011000$
00010	$S_2 = 11110011101001000010101110110001$
.	.
.	.
.	.
11111	$S_{31} = 00111110011101001000010101110110$

3.3.3.2.6 TRANSMISSION SYMBOL PACKET GENERATION

The CCSK codewords are converted to one of two types (DP or SP) of transmission symbol packets (also called symbol packets) illustrated in Figure 3.3-5. In the DP symbol packet the same CCSK codeword is applied to both pulses. For communication modes 1 and 2, each pulse of every symbol is transmission encrypted: the 32-bit CCSK sequence is modified in a way known by all receivers enabling them to recover the CCSK sequence and; therefore, the five data bits it represents. There is no symbol packet encryption for mode 4. DP symbol packets are used for the four TR symbols following the synchronization preamble, header words of all transmissions, all symbols of the RTT Interrogation/Reply message, and all data symbols of the Standard DP and Packed-2 DP message packing structures. The SP symbol is used for the data symbols of the Packed-2 SP and Packed-4 SP message packing structures. The JU may be initialized to transmit only DP message packing structures for any participation group. The header word indicates the type of message packing structure; therefore, the receiving JU can receive any message without prior knowledge of the message packing structure transmitted.



A. SINGLE PULSE TRANSMISSION SYMBOL PACKET

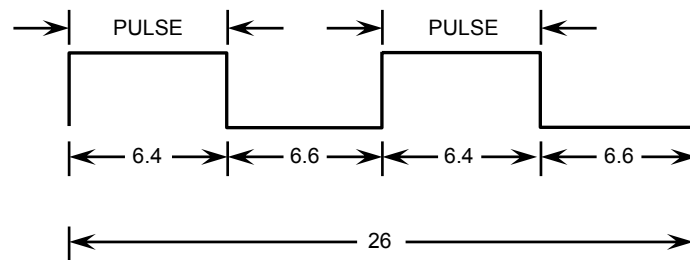

B. DOUBLE PULSE TRANSMISSION SYMBOL PACKET

ALL VALUES REPRESENT MICROSECONDS

FIGURE 3.3-5. JTIDS/MIDS Transmission Symbol Packets

Each transmitted pulse consists of a burst of carrier frequency. The frequency is hopped from pulse to pulse in communication mode 1 only. The transmitted pulse is formed by continuous phase shift modulation (CPSM) of the carrier frequency at a 5-megabit-per-second rate using the 32-bit pulse sequence as the modulating signal. CPSM, also known as minimum frequency shift keying, can be viewed as phase coherent Frequency Shift Keying (FSK) modulation. Viewed as an FSK modulation, CPSM is represented by a phase coherent binary FSK signal between two frequencies, F_1 and F_2 , with separation between them equal to $1/2T$, where T = the digit duration of 200 nanoseconds, as illustrated in Figure 3.3-6. The n th digit is transmitted as the lower frequency if it is the same as the $(n-1)$ st digit. The higher frequency is transmitted if it differs. Since noncoherent detection must be employed in the receiver, the frequency transmitted for the first digit of any pulse is arbitrary.

3.3.3.2.7 CARRIER FREQUENCY SELECTION

JTIDS/MIDS transmissions occur in the frequency band between 960 and 1,215 MHZ. In communication modes 2 and 4, all transmissions are made at 969 MHZ. In communication mode 1, spread spectrum modulation is employed to spread the JTIDS/MIDS energy across the band in the 51 discrete frequencies shown in Table 3.3-2. To prevent interference with the IFF system that also occupies the frequency band, frequencies are excluded in guard regions around the IFF frequencies at 1030 and 1090 MHZ. The TACAN system also occupies this band, and interference with it is prevented by the spread spectrum modulation that produces JTIDS/MIDS transmissions having low duty cycle and different pulse spacing with respect to any particular TACAN channel.

3.3.4 PARTICIPATION GROUPS

Messages are sorted into participation groups (PGs)* and are transmitted in time slots assigned to the PG into which the message has been sorted. The following paragraphs discuss PG types, time slot and net assignments, and message exchange and PG protocols.

* Each PG may be thought of as a discrete digital communication channel operating independently from other PGs, except that the PGs do not have independent logic for initializing and maintaining communications.

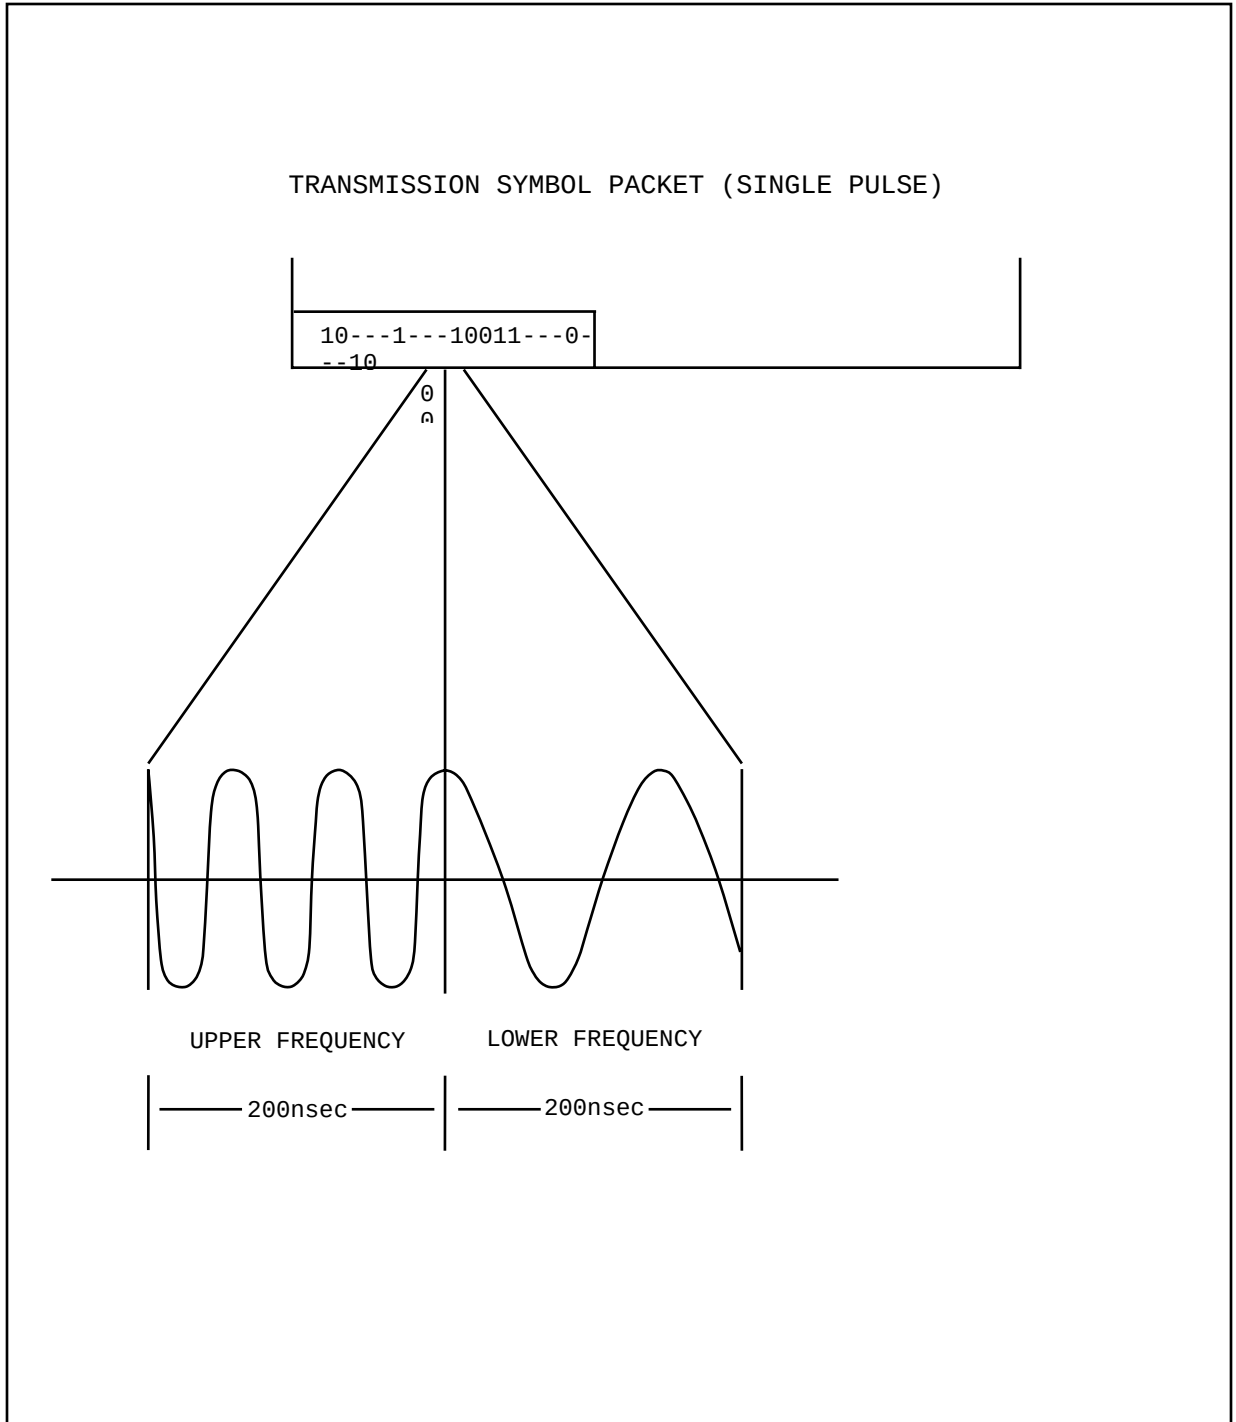


FIGURE 3.3-6. JTIDS/MIDS Waveform (Continuous Phase Shift Modulation)

MIL-STD-6016B

TABLE 3.3-2. Carrier Frequencies (Communication Mode 1)

Frequency Number (F _n)	Frequency (MHZ)	Frequency Number (F _n)	Frequency (MHZ)	Frequency Number (F _n)	Frequency (MHZ)
0	969	17	1062	34	1158
1	972	18	1065	35	1161
2	975	19	1113	36	1164
3	978	20	1116	37	1167
4	981	21	1119	38	1170
5	984	22	1122	39	1173
6	987	23	1125	40	1176
7	990	24	1128	41	1179
8	993	25	1131	42	1182
9	996	26	1134	43	1185
10	999	27	1137	44	1188
11	1002	28	1140	45	1191
12	1005	29	1143	46	1194
13	1008	30	1146	47	1197
14	1053	31	1149	48	1200
15	1056	32	1152	49	1203
16	1059	33	1155	50	1206

3.3.4.1 PARTICIPATION GROUP TYPES

The two types of PGs are network and needline. A network PG has a function name (e.g., RTT, PPLI, Surveillance) and is defined by a list of Link 16 labels and sublabels, as specified in the JTIDS TIDP. A message designated for transmission in a network PG is sorted by its label and sublabel into the applicable PG and transmitted in a time slot assigned to that PG. Each needline PG is defined by a list of subscriber addresses. A message designated for transmission in a needline PG is assigned a destination address and sorted by its address into the applicable PG. It is transmitted in a time slot assigned to that PG.

Table 3.3-3 lists some of the defined JTIDS/MIDS network PGs and identifies their purposes and the messages that can be exchanged on them. As a minimum, a JTIDS/MIDS communications network must include the PGs identified in Table 3.3-3 (marked by *), and all JUs in an active status must participate on these PGs.

3.3.4.2 TIME SLOT AND NET ASSIGNMENTS

The capacity of a JTIDS/MIDS PG is determined by the number of time slots assigned to the PG. The time slots are assigned in blocks where each block is defined by the set and slot number of the first time slot in the block and a Recurrence Rate Number (RRN), where 2^{RRN} is the total number of time slots per epoch in the block assignment (see Table 3.3-4). The time slots in a block are equally spaced in time throughout an epoch. The net number for a PG may be predefined or selected during operation. In the latter case, the network will include multiple PGs of the same type (e.g., voice) operating in parallel.

TABLE 3.3-3. JTIDS/MIDS Network Participation Groups

PG		Purpose	Messages	Type
Index No.	Function			
0.	No Statement*			
1.	Initial Entry*	Coarse Synchronization	Network Entry	Common
2/3.	RTT-A/RTT-B*	Active Fine Synchronization	RTT Interrogation/Reply	Common
4.	Network Management*	Network Management	Network Management	Common
5/6.	PPLI and Status*	Passive Fine Synchronization	PPLI and Status Relative Navigation, JU Tactical Information Reports	Common
7.	Surveillance	Tactical Information Exchange	Surveillance and Information Management	Common/ Limited
8.	Mission Management/ Weapons Coordination	Tactical Information Exchange	Mission Management, Weapons Coordination, and Weapons Management	Limited
9.	Control	Tactical Information Exchange	Control	Limited
12/13.	Voice A/B*	Tactical Information Exchange	Free Text	Common/ Limited

* JTIDS/MIDS Terminal requirement: MANDATORY (Index No. i.a.w. the JTIDS/MIDS System Segment Specification)

MIL-STD-6016B

TABLE 3.3-4. Time Slot Block Size and Interval

<u>RRN*</u>	<u>Block Size</u> <u>(Time Slots/Epoch)</u>	<u>Time Slot Interval</u> <u>Time Slots</u>	<u>Time</u>	
0	1	98,304	12.8	min
1	2	49,152	6.4	min
2	4	24,576	3.2	min
3	8	12,288	1.6	min
4	16	6,144	48	sec
5	32	3,072	24	sec
6	64	1,536	12	sec
7	128	768	6	sec
8	256	384	3	sec
9	512	192	1.5	sec
10	1,024	96	750	ms
11	2,048	48	375	ms
12	4,096	24	187.5	ms
13	8,192	12	93.75	ms
14	16,384	6	46.875	ms
15	32,768	3	23.4375	ms
*RRN - recurrence rate number.				

3.3.4.3 MESSAGE EXCHANGE PROTOCOL

The message exchange protocol defines the conditions under which each Link 16 message will be exchanged and the procedures for exchanging each message. Some of the areas addressed in the message exchange protocol are:

a. Transmit/Receive Rules. Defines specific conditions under which a message and the individual words comprising the message are transmitted. Also defines the special rules governing the receipt of the message.

b. Message Exchange Procedures. Defines how information is exchanged and managed using the Link 16 messages. For discussion purposes (see Section 4) the message exchange procedures are grouped into technical functions, e.g., Air Surveillance.

c. Minimum Implementation. Defines the minimum amount of information that must be exchanged by a JU to interoperate using Link 16. Minimum implementation is defined at the network, functional, message, word, data element and data item levels (see Appendix A).

3.3.4.4 PARTICIPATION GROUP PROTOCOL

The PG protocol defines the rules and procedures for exchanging any message on a PG. The PG protocol includes the time slot assignment methods, access mode, and relay mode (if required).

3.3.4.4.1 TIME SLOT ASSIGNMENT METHODS

The nets and time slots are assigned to PGs by one or both of the following time slot assignment methods. The parameters involved in a time slot block assignment are listed in Table 3.3-5.

a. In the static time slot assignment method, PG nets and time slot blocks are assigned during JU initialization or by operator action during operation. Other communications media (e.g., voice) must be used for operator coordination in this assignment method.

b. In the dynamic time slot assignment method, PG nets and time slot blocks are assigned dynamically via the network management messages. One or more JUs are designated to manage the capacity of JTIDS/MIDS PGs. The designated JUs allocate/reallocate time slots between the PGs for which they are responsible in response to changing communication needs or requests from PG participants.

TABLE 3.3-5. Time Slot Block Assignment Parameters

1.	PG designation.
2.	Access mode assigned to time slot block.
3.	Indication that JU is to add or delete the specified time slot block.
4.	Time slot block designation; initial time slot number (0-32,767), time slot set (A, B, or C), and recurrence rate number (see Table 3.3-4).
5.	Time to execute assignment (epoch, time slot number) (for dynamic time slot assignment method only).
6.	Indication that JU is to use the specified time slot block for message reception or transmission.
7.	Net number (0-127) if prespecified.
8.	Access rate (for contention access mode only).
9.	Reallocation Pool Number (for time slot reallocation access mode only).
10.	KGV-8/TSEC Secure Data Unit (SDU) cryptovariables.

3.3.4.4.2 ACCESS MODES

The access modes define how time slots assigned to a JU for transmission of messages of a PG are selected. One or more of the following modes is used for each JTIDS/MIDS PG:

a. **Dedicated Access Mode.** In this mode, time slots assigned for transmission of a PG's messages are used as needed in order of their occurrence.

b. Contention Access Mode. In this mode, time slots are assigned to multiple JUs for transmission. A contention access rate is assigned to define intervals of time having the same rate. Once each interval, each terminal transmits in one time slot. The time slot used is selected randomly from all assigned slots that occur during the interval. The contention access mode can be used only when communication mode 1 is selected.

c. Time Slot Reallocation Access Mode. In this mode, JUs in a PGC periodically reallocate a shared pool of time slots such that a JU assigns itself time slots according to its demand and the announced demands of other JUs. If the aggregate JU demand for time slots exceeds the capacity of the pool, the JUs assign themselves slots in proportion to their demands but scaled down by a common factor such that the total allocation is within the pool capacity. The mode can be used only when Communication Mode 1 is selected.

d. Call-Up Access Mode. In this mode, time slots are allocated dynamically to JUs for transmission. The PG participants are interrogated sequentially under centralized control (roll call mode) or decentralized control (round robin mode). Upon interrogation, a JU transmits all available messages applicable to the PG, using the next n assigned time slots.

3.3.5 TRANSMIT MODES

Three operator selectable transmit modes are available to a JU. The selected transmit mode determines the conditions under which the JU may transmit messages and is set independently for each JU. The transmit modes are discussed in the following paragraphs.

3.3.5.1 NORMAL MODE

In the normal mode, a JU achieves and maintains fine synchronization, either passively or actively, and then transmits messages unconditionally, subject only to the constraints of its assigned transmit time slots and message exchange protocol.

3.3.5.2 POLLING MODE

In the polling mode, a JU achieves and maintains fine synchronization either passively or actively. A JU in the polling mode transmits fixed and variable format messages only when required to transmit (1) a message in response to a received Communication Control message addressed to the JU, and (2) an operator or machine acknowledgment message. JUs do not transmit RTT Reply messages when in the polling mode. JUs can transmit free text digital voice and RTT Interrogation messages while in the polling mode.

3.3.5.3 RADIO SILENCE MODE

In this mode, a JU achieves and maintains fine synchronization using the passive mode. A JU does not transmit any fixed or variable format messages in the radio silence mode except when it is initially set to the radio silence mode. If already in the state of fine synchronization at that time, a terminal transmits a J2 message to indicate its intent to go Conditional Radio Silence and that it cannot be used as an active synchronization source. A JU can transmit free text digital voice messages while in the radio silence mode.

3.3.6 COMMUNICATION MODES

There are three operator selectable communication modes for a JTIDS/MIDS network. The selected communication mode determines whether or not the network can operate on multiple nets (by employing frequency hopping) and the transmitted data are encrypted. All JUs in a JTIDS/MIDS network must select the same communication mode. In communication modes 2 and 4, all transmissions are made at 969 MHZ. The communication modes are:

<u>Communication Mode</u>	<u>Multiple Nets</u>	<u>Data Encrypted</u>
1	Yes	Yes
2	No	Yes
3	Mode Not Used	Mode Not Used
4	No	No

3.3.7 RELAY FUNCTIONS

JTIDS/MIDS employs radio relay techniques in order to extend communications coverage beyond line of sight. The relay techniques that are selectable on an individual PG basis are paired time slot and repromulgation. They are discussed below.

3.3.7.1 PAIRED TIME SLOT RELAY

In this technique, paired sets of relay receive and relay transmit time slots are assigned to a JU. The JU automatically retransmits any valid message(s) received in a relay receive time slot in the corresponding relay transmit time slot. Each paired block assigned to a JU is labeled with one of six relay functions or the PG number of the transmit assignment whose messages it is relaying. All paired blocks having the same relay function name or PG number as a label comprise the assignments for that relay function.

a. Main Net Relay Function. Messages of one or more PGs are relayed by the main net relay function when paired blocks labeled "Main Net Relay" have their relay receive blocks corresponding to the transmit blocks of those PGs. When active as a main net relay, a terminal sets the Active Relay Indicator, Wide Area Network in its PPLI messages to "active" and transmits its PPLI messages in both the Common and Special PPLI Pools. A terminal may operate in either the conditional or unconditional mode for this type of relay function.

b. Voice Relay Function. Messages of the voice PG are relayed by the voice relay function when paired blocks labeled "Voice Net Relay" have their relay receive blocks corresponding to the transmit block(s) of the voice PG assignments. If the net number of the voice PG assignments and voice relay assignments is specified as "No Statement," the voice relay net is selected by the operator for voice channel operation. A terminal in the active state of the voice relay function sets the Active Relay Indicator, Voice Channel in its PPLI message to "active." The net number also is reported in the PPLI message. A terminal may operate in either the conditional or unconditional mode for this type of relay function.

c. Control Relay Function. Messages of the control PG are relayed by the control relay function when paired blocks labeled "Control Relay" have their relay blocks corresponding to the transmit blocks of the control PG assignments. If the net number of the control PG assignments is specified as "No Statement," the control relay net is selected by the operator for control channel operation. A terminal in the active state of the voice relay function sets the Active Relay Indicator, Control Channel in its PPLI message to "active." A terminal may operate in either the conditional or unconditional mode for this type of relay function.

d. Zoom Relay Function. The paired blocks of a zoom relay function are identical with those of the main net relay function. In the main net relay function, the relay receive and relay transmit net numbers are identical. In the zoom relay assignment, the relay transmit net number is different from the transmit net number assigned the main net relay function. A JU may be assigned to operate either as a main net or zoom relay function, but not both concurrently. A JU performs the zoom relay function in the unconditional mode.

e. Directed Relay Function. The JTIDS/MIDS terminal performs a directed relay function in the unconditional relay mode (see paragraph 3.3.7.3). The "receive" and "transmit" time slots and net numbers are those paired blocks assigned to the terminal, by initialization host control or Radio Relay Control message, as directed relay blocks.

The JTIDS/MIDS terminal is capable of accepting and operating at least 16 directed relay assignments, each assignment labeled in the range 0-15.

f. Participation Group Relay Function. For this relay function, the paired block assignments are designated to be PG relay functions and are labeled with the index number of the PG whose message they are relaying.

3.3.7.2 REFROMULGATION RELAY

In this technique, the JU that originates a message indicates in the Repromulgation Relay message how many times a message is to be retransmitted. Then each JU assigned to relay messages on the subject PG will decrease by one the number of retransmissions indicated in the relay message and will

retransmit the message once. The procedure for selecting relay transmit time slots depends on the access mode employed by the subject PG. The maximum radius of the communication coverage is the sum of the line of sight ranges of the JU that originated a message and all JUs (in one direction) that relayed the message.

3.3.7.3 RELAY MODES

All paired blocks having the same label (e.g., main net relay, voice, etc.) respond collectively to a relay control action having that label. A relay control action may be given a terminal by transmitting the initial word of the Radio Relay Control message or via initialization entry. One relay action, Delete, removes the assignments for that function from the memory of the terminal so that relay of messages in that function is no longer permitted. Four other nondelete relay control actions can be specified.

a. Suspend. A relay function of a terminal placed in the suspended mode has its assignments held in memory by the terminal; relay of messages in the function is suspended.

b. Conditional. A relay function of a JU placed in the conditional mode becomes active when it provides better communication coverage than other JUs assigned the same relay function. Only the main net, voice and control relay functions may be placed in the conditional mode.

c. Unconditional. A relay function of a JU placed in the unconditional mode relays all valid messages received in assigned relay receive time slots. In this method the maximum radius of the communication coverage is the sum of the line of sight ranges of the JU that originated a message and the JU that relayed the message.

d. Message Directed. A PG relay function may be assigned Message Directed 0 or Message Directed 1 action. If the message directed relay bit in a Variable Message Format (VMF) message is present and is the same as the assignment, the message is relayed. If not, the message is not relayed. If the message directed field is not present in a VMF message or the message is a fixed word format message, the message is relayed unconditionally.

3.3.8 RELATIVE NAVIGATION

The synchronous nature of JTIDS/MIDS provides the basis for individual JUs to determine their location relative to the other JUs. When two or more JUs have an accurate, independently derived knowledge of their geodetic position, the relative navigation function provides all JUs with accurate geodetic position data.

The relative navigation function is based on the multilateration techniques illustrated in Figure 3.3-7. A JU could determine its position in three dimensions based on the measured Time of Arrival (TOA) of PPLI messages from three JUs and the positions of the transmitting JUs (included in the PPLI messages). However, the accuracy of the multilateration technique is affected by relative JU clock errors and the fact that the TOA measurements are not made simultaneously. Therefore, the TOA measurements are combined through a recursive filter process to determine own unit position, movement, and clock corrections. For mobile JUs, dead reckoning data are used to extrapolate position data between filter operations. In addition, the dead reckoning data are supplied to the filter for optimum mixing with the movement data derived from successive position estimates. A JU selects the TOA measurements to be used in the filter process based on the estimated accuracy (quality) of its own position and time data and that of other JUs as reported in their PPLI messages.

SYSTEM
TIME SLOTS
PPLI MESSAGE
TRANSMISSIONS
(CONTAINS AIRCRAFT
POSITION)

USER = 4
FINDING
POSITION O
RECEIPT OF
PPLI MESSAGES

TOA = TIME OF ARRIVAL

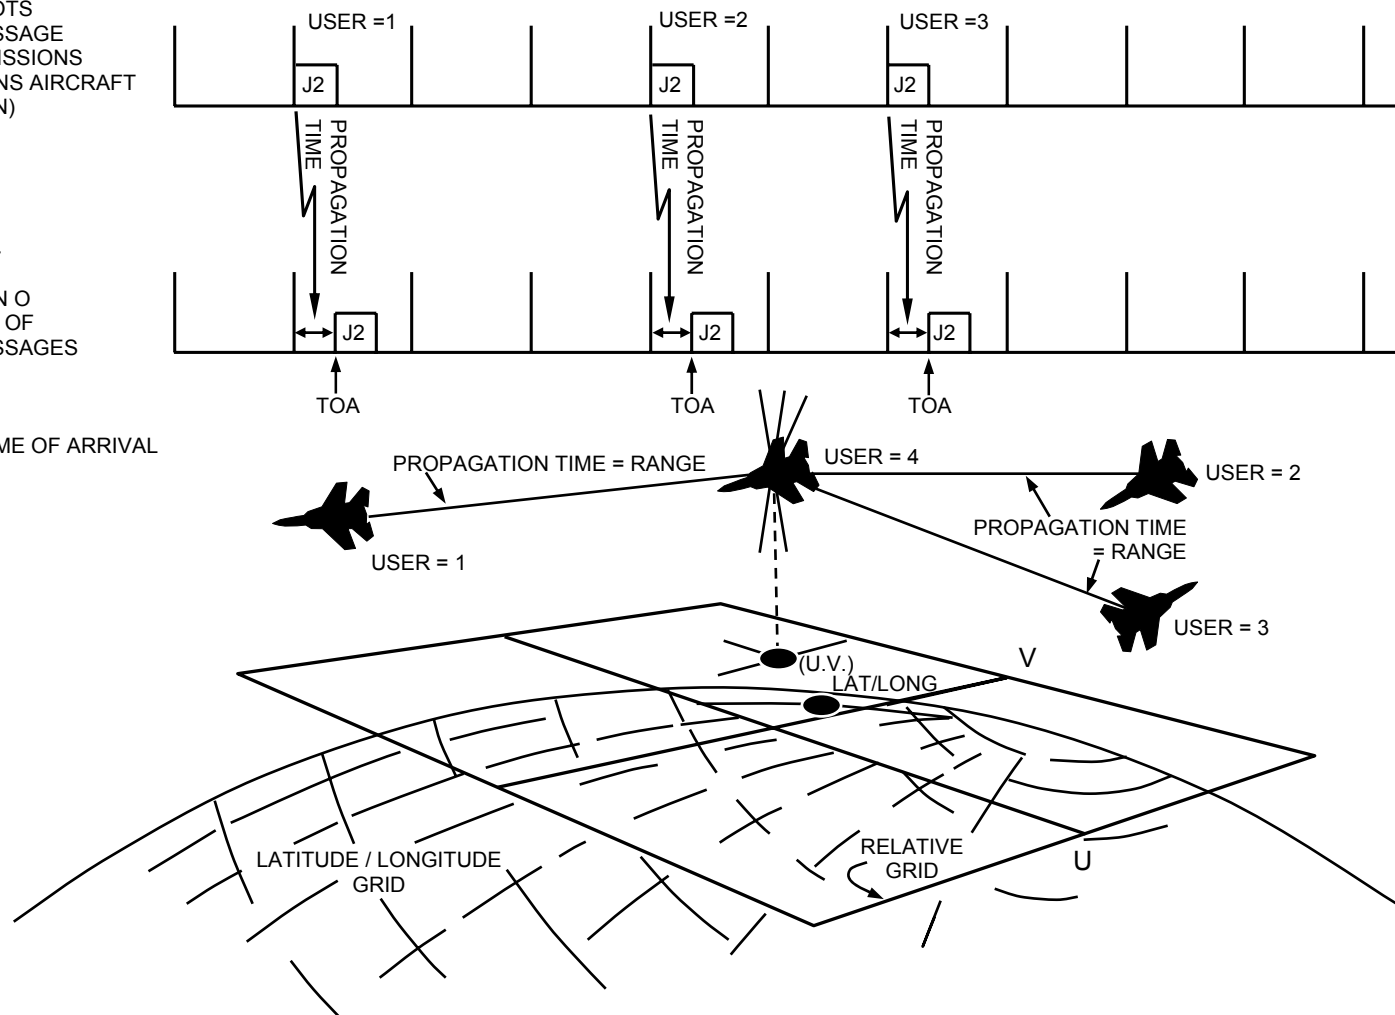


Figure 3.3-7. Position Location Using Time-of-Arrival Data

3.3.9 DATA MESSAGES

JTIDS/MIDS data messages convey information (i.e., a transfer of bits or symbols representing data) among the JUs. JTIDS/MIDS data messages convey Link 16 messages and free text information. Most JTIDS/MIDS messages fall within this category. Data messages include those being originated at the transmitting terminal and those being relayed by the transmitting terminal.

In addition to the synchronization preamble and time refinement/pulses, data messages contain a header plus the information bearing portion of the message. These data messages are further distinguished by packing structures and data formats as indicated in Figure 3.3-3. The packing structures define the amount and symbol redundancy of information that can be conveyed in a message transmission, while the data formats define the structure or formatting of the data themselves. The following paragraphs discuss the packing structures, data formats, and headers of JTIDS/MIDS data messages.

3.3.9.1 DATA MESSAGE PACKING STRUCTURES FORMATS

Data messages are transmitted in one of four message packing structures: Standard DP, Packed-2 SP, Packed-2 DP, and Packed-4 SP. In each of these formats, the header word (described more fully in paragraph 3.3.9.3) is sent as a 16-symbol, double pulse per symbol Reed-Solomon codeword. The distinction between the four structures lies in the number of data symbols transmitted to convey information and whether the symbols are SP or DP (see paragraph 3.3.3.2.6). The following paragraphs describe the four message packing structures in more detail.

3.3.9.1.1 STANDARD DP MESSAGE PACKING STRUCTURE

The information bearing portion of Standard DP JTIDS/MIDS message packing structures consists of 93 symbols. These symbols can convey three (31, 15) Reed-Solomon codewords representing 225 bits of coded information or, alternatively, 465 bits of uncoded data. Thus, the Standard DP message packing structure contains 32 pulses in the synchronization preamble, 8 pulses in the TR segment, and 218 pulses corresponding to 109 DP symbols used to convey the header plus data. The total message transmission time is 3.354 milliseconds, based on 13.0 microseconds separation between successive

pulses. The Standard message packing structure can be jittered as described in paragraph 3.3.3.1.

3.3.9.1.2 PACKED-2 MESSAGE PACKING STRUCTURE

The information bearing portion of Packed-2 message packing structure consists of 186 SP symbols. These symbols can convey six (31, 15) Reed-Solomon codewords representing 450 bits of coded information or, alternatively, 930 bits of uncoded data. The data portion of the Packed-2 SP message packing structure again consists of 218 pulses, as with the Standard DP message packing structure, of which 32 pulses are used to represent the 16-symbol, double pulse per symbol header, and the remaining 186 information bearing symbols. As with the Standard DP message packing structure, the Packed-2 SP message packing structure requires 3.354 milliseconds of transmission time and can be jittered.

3.3.9.1.3 PACKED-2 DP MESSAGE PACKING STRUCTURE

The information bearing portion of Packed-2 DP JTIDS/MIDS message packing structures consists of 186 DP symbols. The Packed-2 DP message packing structure is identical to the Standard DP message packing structure, except that it contains an extra 93 DP data symbols, which are appended to the Standard message packing structure. The 186 DP symbols can convey six (31, 15) Reed-Solomon codewords representing 450 bits of coded information or, alternatively, 930 bits of uncoded data. Since the Packed-2 DP message packing structure contains 186 more pulses than Standard DP or Packed-2 SP message packing structures, the TDMA message transmission time is 5.772 milliseconds for the Packed-2 DP message packing structure. Packed-2 DP message packing structure is not jittered.

3.3.9.1.4 PACKED-4 SP MESSAGE PACKING STRUCTURE

The information bearing portion of Packed-4 SP JTIDS/MIDS message packing structure consists of 372 SP symbols. Packed-4 message packing structure is identical to the Packed-2 SP message packing structure, except that it contains an extra 186 SP data symbols, which are appended to the Packed-2 SP message packing structure. The 372 SP symbols can convey twelve (31, 15) Reed-Solomon codewords representing 900 bits of coded information or,

alternatively, 1860 bits of uncoded data. As with Packed-2 DP message packing structures, the Packed-4 SP message packing structure requires 5.772 milliseconds of transmission time and cannot be jittered.

3.3.9.2 MESSAGE TYPES

JTIDS/MIDS data messages are further characterized by whether the underlying information transmitted is arranged in a fixed, predefined format (fixed format); a variable, but predefined format (variable format); or in a nonpredefined format (free text format). These message types are described in the following paragraphs.

3.3.9.2.1 FIXED FORMAT MESSAGES

A fixed format message includes up to three, six, or twelve 75-bit words (70 data bits/word), depending on the packing format and whether the DP or SP transmission symbol packet is used. The format and sequence of data fields in each word are predefined (see section 5). A message is composed of an initial word and may include extension and/or continuation words. The availability of data and the applicable message exchange protocol define the combination of extension and/or continuation words included in a message. The basic functions of these words are:

a. Initial Word. The initial word identifies the message and the sum of the extension and continuation words following the initial word, and it contains the basic data included in the message.

b. Extension Words. The extension words contain additional data that are normally included in the message. Extension words need not be transmitted in a message, but, if they are transmitted, they must be transmitted in serial order following the initial word.

c. Continuation Words. The continuation words contain amplifying (e.g., optional) data that are included in the message as required by the message exchange protocol and the availability of information. If extension words are transmitted, continuation words must be transmitted following all extension words.

A JU can transmit one or more Link 16 initial words in a single Standard DP, Packed-2 SP, Packed-2 DP, and Packed-4 SP message packing structure.

All words comprising a fixed format message must be transmitted in proper sequence in a single time slot. Multiple fixed format messages may be transmitted in a time slot.

3.3.9.2.2 VARIABLE MESSAGE FORMAT

A VMF consists of a variable length string of fields formatted into 75-bit words (70 data bits/word) for transmission. The content of individual words in a message may vary since fields can be repeated and those fields not required for a message are not transmitted. Several time slots may be required to transmit a variable message. The VMF includes word and field accountability data interspersed between or among the data fields. The order of fields in a VMF may be predefined, except that fields may be repeated, deleted, or random. In the latter case, the field accountability data consist of unique field identifiers.

3.3.9.2.3 FREE TEXT MESSAGE

Free text messages are used for the transmission of voice data and other data not in a predefined format. Only one free text message may be transmitted in a time slot. The maximum size of the message depends on whether or not the message is Reed-Solomon encoded and what message packing format is used.

3.3.9.3 HEADER WORD

A 35-bit header word is included once in each transmission (except those time slots used for RTT messages) to provide information concerning all messages transmitted in the time slot. Table 3.3-6 contains the information found in the header word. The header word is always encoded into a (16, 7) Reed-Solomon codeword (see paragraph 3.3.3.2.3).

3.3.10 ROUND TRIP TIMING MESSAGE PACKING STRUCTURE

RTT messages are used only to establish and maintain fine synchronization (see paragraph 3.3.2.4). The RTT Interrogation message and RTT Reply message

contain 32 pulses in the synchronization preamble, 8 pulses in the TR segment, and 32 pulses in the data portion. The header word associated with data messages (see paragraph 3.3.9.3) is not transmitted with RTT messages. Instead, necessary header type information (e.g., SDU serial number) is included in the RTT message. The data portion of an RTT Interrogation message and an RTT Reply message consists of 16 symbols. These symbols convey (16,7) Reed-Solomon codeword representing 35 bits of coded information. The three types of RTT messages are characterized in Table 3.3-8 and are discussed below.

a. RTT-A Interrogation Message. This message is addressed to a specific unit and requests that the addressed unit respond with an RTT Reply message.

b. RTT-B Interrogation Message. This message is unaddressed and those active units with clock accuracy (Q_t) equal to the clock accuracy specified in the RTT-B message respond with an RTT Reply message. An interrogating JU specifies, in its Interrogation message, a time quality that exceeds its own time quality. The Interrogation message and Reply message are transmitted on the net having a number equal to the time quality specified in the Interrogation message.

c. RTT Reply Message. This message is transmitted in response to RTT-A and RTT-B Interrogation messages to complete the active fine synchronization process.

TABLE 3.3-6. Header Word Format

34	19	18	4	3	2	0
SECURE DATA UNIT SERIAL NUMBER		TRACK NUMBER, SOURCE		RI/TM		TIME SLOT TYPE

FIELD	NO. BITS	DESCRIPTION
Time Slot Type	3	Identifies message packing format, message type, and whether or not a free text message is error correction (Reed-Solomon) encoded. Details are summarized further in Table 3.3-7.
Relayed Transmission Indicator (RI)/Type Modification (TM)	1	<u>Free Text Message.</u> When the Time Slot Type field identifies a free text message, this field indicates whether the transmission symbol packet is double pulse (RI/TM IND = 0) or single pulse (RI/TM = 1). <u>Fixed or Variable Format Message.</u> When the Time Slot Type field identifies a fixed or variable format message, this field indicates whether the message(s) in the time slot were relayed (RI/TM = 1) or not relayed (RI/TM = 0).
Track Number, Source	15	Identifies the originator of the messages(s) in a time slot.
Secure Data Unit Serial Number	16	These data used in the message decryption process.

TABLE 3.3-7. Data Message Type Codes

TYPE CODE	PACKING STRUCTURE	MESSAGE TYPE	REED-SOLOMON CODING	DATA BITS CONVEYED
0(0)	STD DP	FT	NO	465
0(1)	PKD-2 SP	FT	NO	930
1(0)	PKD-2 DP	FT	NO	930
1(1)	PKD-4 SP	FT	NO	1860
2(0)	PKD-2 DP	FT	YES	450
2(1)	PKD-4 SP	FT	YES	900
3	PKD-2 SP	FF*	YES	450
4	STD DP	FF*	YES	225
5	PKD-2 DP	FF*	YES	450
6(0)	STD DP	FT	YES	225
6(1)	PKD-2 SP	FT	YES	450
7	PKD-4 SP	FF*	YES	900

DP = Double Pulse

SP = Single Pulse

PKD = Packed

FT = Free Text Messages

FF = Fixed Format Messages

* This also includes VMFs. The distinction between fixed format and VMFs is made in the 2-bit Word Format field of every word other than the header word.

MIL-STD-6016B

TABLE 3.3-8. RTT Message Format

	34	19 18	4 3	2	0
RTT-A Interrogation Msg	Secure Data Unit Serial Number	TN Addressee	RTT Type	Time Slot Type	
	34	19 18 15 14	4 3	2	0
RTT-B Interrogation Msg	Secure Data Unit Serial Number	Q _t	SP	RTT Type	Time Slot Type
	34	19 18			0
RTT Reply Msg	Interrogator's Secure Data Unit Serial Number	RTT TOA			

FIELD	NO. BITS	DESCRIPTION
Time Slot Type	3	Type = 2
RTT Type	1	RTT-A. RI/TM = 0 RTT-B. RI/TM = 1
TN, Addressee	15	Identifies unit that is requested to respond to this RTT Interrogation message.
SP	11	Spare.
Q _t	4	Indicates the time quality value a unit must have in order to respond to this RTT Interrogation message.
Secure Data Unit Serial Number	16	These data used in the message decryption process.
TOA	19	Time of arrival of RTT Interrogation Message measured by unit transmitting the RTT Reply message.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 4

4. GENERAL REQUIREMENTS

4.1 GENERAL

This section describes the general requirements for exchange of digital data within the interface. This interface consists of participating Link 16 units and includes the forwarding Link 11/11B Units. The requirements for the individual messages and their transmit/receive (T/R) rules are contained in Section 5. Minimum implementation requirements for the messages are contained in Appendix A. Appendix B is the Data Element Dictionary. Data forwarding rules for the interface are provided in Appendix C. Message, data element, and data item implementation by system are provided in Appendix D and the Classified Supplement. Appendix E is the ICP repository for those ICPs that are approved by the CCB for inclusion in MIL-STD-6016.

4.1.1 MESSAGE STANDARD FUNCTIONAL AREAS

The Link 16 interface has been divided into functional areas as follows:

- a. System Information Exchange and Network Management.
- b. Precise Participant Location and Identification (PPLI).
- c. Air Surveillance.
- d. Surface (Maritime) Surveillance.
- e. Subsurface (Maritime) Surveillance.
- f. Land (Ground) Surveillance.
- g. Space Surveillance
- h. Electronic Surveillance.
- i. Electronic Warfare (EW)/Intelligence.

- j. Mission Management.
- k. Weapons Coordination and Management.
- l. Control.
- m. Information Management.

The relationship of these Link 16 functional areas to the warfare tasks is shown in Table 4.1-1. Relationships among the functions may be used to group them logically for making maximum use of the Joint Tactical Information Distribution System (JTIDS) netting and system capacity.

The functions are strongly interdependent because most tasks require the use of several functions. The System Information Exchange and Network Management, PPLI, and Information Management functions are essential to the successful employment of almost all of the other functions. The Surveillance functions all require the same set of supporting functions, while broader functions such as Mission Management, Weapons Coordination and Management, and Control require varying degrees of support from most of the other functions.

Participation in each functional area includes adherence to required JTIDS Unit (JU) Response Times (Tables 4.1-2 and 4.1-3), message update rates (Table 4.1-3), priorities of message transmission, T/R rules, and the minimum implementation. JU Response Time is defined as the time from new information availability at the JU to the transmission of the information on the link. JU Response Times will vary with the criticality of the information being transmitted. As an example, Automatic Carrier Landing System (ACLS) Control information is more critical than Surface (Maritime) Surveillance information. Message update rate is defined as the periodicity of a message transmission on the link. A message update rate of not applicable (NA) in Table 4.1-3 indicates that the message will be updated when new information is available instead of on a periodic basis.

Table 4.1-1. JTIDS/MIDS User Technical Functions Versus Warfare Tasks

FUNCTION	AIRBORNE OPERATIONS	AD/AAW (A/C) OPERATIONS	AIR DEFENSE SAM OPS	AIR RECON/ SURV OPS	AIRSPACE CONTROL	AIR STRIKE INTERDIC OPS	ASW OPERATIONS	CAS OPERATIONS	FIRE SUPPORT OPERATIONS	LAND COMBAT OPERATIONS	SEARCH & RESCUE OPS	SHIP-TO-SHORE MOVEMENT
SYSTEM INFO & NETWORK MGT	X	X	X	X	X	X	X	X	X	X	X	X
PPLI	X	X	X	X	X	X	X	X	X	X	X	X
AIR SURV	X	X	X	X	X	X	X	X	X	X	X	X
SURF (MARITIME) SURV		X	X	X		X	X		X		X	X
SUBSURF (MARITIME) SURV				X			X				X	X
LAND (GROUND) SURV	X	X	X	X		X		X	X	X	X	X
SPACE SURV			X									
ELEC SURV		X	X	X		X	X	X	X	X	X	X
EW/INTELL	X	X	X	X		X	X	X	X	X	X	X
MISSION MGT	X	X	X	X	X	X	X	X	X	X	X	X
WEAPONS COORD & MGT	X	X	X	X	X	X	X	X	X	X	X	X
CONTROL	X	X	X	X	X	X	X	X			X	
INFO MGT	X	X	X	X	X	X	X	X	X	X	X	X

MIL-STD-6016B

TABLE 4.1-2. JTIDS/MIDS Unit Response Time

FUNCTION	RESPONSE TIME
SYSTEM INFORMATION	
TEST REQUIREMENTS	10 SEC.
INTRA-SYSTEM REQUIREMENTS	10 SEC.
TERMINAL NET MAINTENANCE	10 SEC.
NETWORK MANAGEMENT	10 SEC.
NAVIGATION SYSTEM ALIGNMENT	1 SEC.
PPLI	10 SEC.
AIR SURVEILLANCE	10 SEC.
SURFACE (MARITIME) SURVEILLANCE	30 SEC.
SUBSURFACE (MARITIME) SURVEILLANCE	30 SEC.
LAND (GROUND) SURVEILLANCE	30 SEC.
SPACE SURVEILLANCE	10 SEC.
ELECTRONIC SURVEILLANCE	12 SEC.
INTELLIGENCE THREAT WARNING	1 TO 60 SEC. ¹
MISSION MANAGEMENT	TO BE DETERMINED
WEAPONS COORDINATION AND MANAGEMENT	10 SEC.
AIR TRAFFIC CONTROL	2 SEC.
SEARCH AND RESCUE	2 SEC.
RECONNAISSANCE	2 SEC.
RENDEZVOUS	2 SEC.
REFUEL/TANKER	2 SEC.
ASW AIR CONTROL	2 SEC.
AIR INTERCEPT CONTROL	
SINGLE ENGAGE CAPABILITY	2 SEC.
MULTIPLE ENGAGE CAPABILITY	2 SEC.
AIR SUPPORT OPERATIONS	2 SEC.
CLOSE AIR SUPPORT	2 SEC.
BEACON BOMBING	2 SEC.
INTERDICTION	2 SEC.
PRECISION BOMBING	10 SEC./0.1 SEC. ²
LASER TARGETING	2 SEC.
AIR CARGO DELIVERY	2 SEC.
ACLS/ALS (PRECISION DIRECTION)	10 SEC./0.1 SEC. ²
CAINS	NONE
MISSILE/RPV CONTROL	
OVER THE HORIZON TARGETING	1 SEC.
PRECISION DIRECTIONS (RPV)	0.1 SEC.
HANDOVER (UNMANNED)	1 SEC.

NOTES

1. THREAT WARNING MAXIMUM RESPONSE TIME = 1 SECOND; INTELLIGENCE IS TIME DEPENDENT ON MESSAGE CONTENT.
2. 0.1-SECOND RESPONSE TIME REQUIRED DURING FINAL CONTROL MODE.

MIL-STD-6016B

TABLE 4.1-3. JTIDS/MIDS Unit Response Time and Update Rate by Message
(Sheet 1 of 2)

MESSAGE NUMBER	MESSAGE TITLE	RESPONSE TIME (SECS)	MESSAGE UPDATE RATE
J0.0	INITIAL ENTRY	10	12, 8-20 SECONDS
J0.1	TEST	10	SEE J0.1 T/R RULES
J0.2	NETWORK TIME UPDATE	10	SEE J0.2 T/R RULES
J0.3	TIME SLOT ASSIGNMENT	10	NA
J0.4	RADIO RELAY CONTROL	10	NA
J0.5	REPROMULGATION RELAY	10	NA
J0.6	COMMUNICATIONS CONTROL	10	NA
J0.7	TIME SLOT REALLOCATION	6	12, 6-48 SECONDS (EXCLUDING 42 SECONDS)
J1.0	CONNECTIVITY INTERROGATION	10	NA
J1.1	CONNECTIVITY STATUS	10	NA
J1.2	ROUTE ESTABLISHMENT	10	NA
J1.3	ACKNOWLEDGEMENT	10	NA
J1.4	COMMUNICANT STATUS	10	SEE J1.4 T/R RULES
J1.5	NET CONTROL INITIALIZATION	10	NA
J1.6	NEEDLINE PARTICIPATION GROUP ASSIGNMENT	10	NA
J2.0	INDIRECT INTERFACE UNIT PPLI	10	12, 8-20 SECONDS
J2.2	AIR PPLI	10	SEE J2.2 T/R RULES
J2.3	SURFACE (MARITIME) PPLI	10	SEE J2.3 T/R RULES
J2.4	SUBSURFACE (MARITIME) PPLI	10	TBD
J2.5	LAND (GROUND) POINT PPLI	10	SEE J2.5 T/R RULES
J2.6	LAND (GROUND) TRACK PPLI	10	SEE J2.6 T/R RULES
J3.0	REFERENCE POINT	10	SEE J3.0 T/R RULES
J3.1	EMERGENCY POINT	10	1.6, 1.2-2 MINUTES
J3.2	AIR TRACK	10	SEE J3.2 T/R RULES
J3.3	SURFACE (MARITIME) TRACK	30	SEE J3.3 T/R RULES
J3.4	SUBSURFACE (MARITIME) TRACK	30	SEE J3.4 T/R RULES
J3.5	LAND (GROUND) POINT/TRACK	30	SEE J3.5 T/R RULES
J3.6	SPACE TRACK	10	SEE J3.6 T/R RULES
J3.7	ELECTRONIC WARFARE PRODUCT INFORMATION	12	12, 8-20 SECONDS
J5.4	ACOUSTIC BEARING/RANGE	30	SEE J5.4 T/R RULES
J6.0	AMPLIFICATION	1-60	SEE J6.0 T/R RULES
J7.0	TRACK MANAGEMENT	10	SEE J7.0 T/R RULES
J7.1	DATA UPDATE REQUEST	10	NA
J7.2	CORRELATION	10	750, 500-1000 MSECS
J7.3	POINTER	10	NA
J7.4	TRACK IDENTIFIER	10	SEE J7.4 T/R RULES
J7.5	IFF/SIF MANAGEMENT	10	SEE J7.5 T/R RULES
J7.6	FILTER MANAGEMENT	10	NA
J7.7	ASSOCIATION	10	SEE J7.7 T/R RULES
J8.0	UNIT DESIGNATOR	TBD	NA
J8.1	MISSION CORRELATOR CHANGE	10	NA
J9.0	COMMAND	10	SEE J9.0 T/R RULES
J9.1	ENGAGEMENT COORDINATION	10	SEE J9.1 T/R RULES

LEGEND

TBD = TO BE DETERMINED

NA = NOT APPLICABLE

MIL-STD-6016B

TABLE 4.1-3. JTIDS/MIDS Unit Response Time and Update Rate by Message
(Sheet 2 of 2)

MESSAGE NUMBER	MESSAGE TITLE	RESPONSE TIME (SECS)	MESSAGE UPDATE RATE
J10.2	ENGAGEMENT STATUS	10	SEE J10.2 T/R RULES
J10.3	HANDOVER	10	NA
J10.5	CONTROLLING UNIT REPORT	10	SEE J10.5 T/R RULES
J10.6	PAIRING	10	SEE J10.6 T/R RULES
J12.0	MISSION ASSIGNMENT	2	SEE J12.0 T/R RULES
J12.1	VECTOR	2	SEE J12.1 T/R RULES
J12.2	PRECISION AIRCRAFT DIRECTION	TBD	SEE J12.2 T/R RULES
J12.3	FLIGHT PATH	2	SEE J12.3 T/R RULES
J12.4	CONTROLLING UNIT CHANGE	2	NA
J12.5	TARGET/TRACK CORRELATION	TBD	SEE J12.5 T/R RULES
J12.6	TARGET SORTING	TBD	SEE J12.6 T/R RULES
J12.7	TARGET BEARING	TBD	SEE J12.7 T/R RULES
J13.0	AIRFIELD STATUS	TBD	SEE J13.0 T/R RULES
J13.2	AIR PLATFORM AND SYSTEM STATUS	TBD	SEE J13.2 T/R RULES
J13.3	SURFACE (MARITIME) PLATFORM AND SYSTEM STATUS	TBD	SEE J13.3 T/R RULES
J13.4	SUBSURFACE (MARITIME) PLATFORM AND SYSTEM STATUS	TBD	TBD
J13.5	LAND (GROUND) PLATFORM AND SYSTEM STATUS	TBD	SEE J13.5 T/R RULES
J14.0	PARAMETRIC INFORMATION	12	TBD
J14.2	ELECTRONIC WARFARE CONTROL/ COORDINATION	12	SEE J14.2 T/R RULES
J15.0	THREAT WARNING	1	SEE J15.0 T/R RULES
J17.0	WEATHER OVER TARGET	TBD	SEE J17.0 T/R RULES
J28.0	U.S. NATIONAL 1 (ARMY)	TBD	TBD
J28.1	U.S. NATIONAL 2 (NAVY)	TBD	TBD SEE J28.1 T/R RULES
J28.2	U.S. NATIONAL 3 (AIR FORCE)	TBD	TBD
J28.20	TEXT MESSAGE	TBD	NA
J28.3	U.S. NATIONAL 4 (MARINE CORPS)	TBD	TBD
J28.4	FR NATIONAL 1	TBD	TBD
J28.5	FR NATIONAL 2	TBD	TBD
J28.6	U.S. NATIONAL 5 (NSA)	TBD	TBD
J28.7	UK NATIONAL 1	TBD	TBD
J29.0	RESERVED	TBD	TBD
J29.1	UK NATIONAL 2	TBD	TBD
J29.3	SP NATIONAL 1	TBD	TBD
J29.4	SP NATIONAL 2	TBD	TBD
J29.5	CA NATIONAL	TBD	TBD
J29.7	AU NATIONAL MESSAGE	TBD	TBD
J30.0	GE NATIONAL 1	TBD	TBD
J30.1	GE NATIONAL 2	TBD	TBD
J30.2	IT NATIONAL 1	TBD	TBD
J30.3	IT NATIONAL 2	TBD	TBD
J30.4	IT NATIONAL 3	TBD	TBD
J30.5	FR NATIONAL 3 (ARMY)	TBD	TBD
J30.6	FR NATIONAL 4 (AIR FORCE)	TBD	TBD
J30.7	FR NATIONAL 5 (NAVY)	TBD	TBD
J31.0	OVER-THE-AIR REKEYING MANAGEMENT	TBD	TBD
J31.1	OVER-THE-AIR REKEYING	TBD	TBD
J31.7	NO STATEMENT	--	SEE J31.7 T/R RULES
RTT-A	RTT INTERROGATION-ADDRESSED	10	SEE RTT-A T/R RULES
RTT-B	RTT INTERROGATION-BROADCAST	10	SEE RTT-B T/R RULES
RTT-REP	RTT REPLY	--	SEE RTT-REP T/R RULES

4.1.2 DESCRIPTION OF INTERFACE UNITS

Units are specified by the communication function they accomplish; the following definitions for units apply throughout this document:

- a. Interface Unit (IU). A generic term that applies to JTIDS Units (JUs), Participating Units (PUs), and Reporting Units (RUs) providing information to the interface.
- b. JTIDS Unit (JU). A unit communicating directly on Link 16.
- c. Command and Control JTIDS Unit (C² JU). A JTIDS unit with command and control (C²) capability communicating directly on Link 16.
- d. Noncommand and Control JTIDS Unit (nonC² JU). A JTIDS unit other than a C² JU communicating directly on Link 16.
- e. Participating Unit (PU). A unit communicating directly on Link 11.
- f. Reporting Unit (RU). A unit taking part in the exchange or transfer of tactical data on a point-to-point data link to which data can be addressed, and from which data can be identified as to source.
- g. Indirect Unit. A PU or RU that is being forwarded onto Link 16.
- h. Supporting Unit (SU). A unit operating in support of a JU, a PU, or an RU which is providing data for the interface but which is not specifically identified as a data source.
- i. Forwarding JTIDS Unit (FJU). A JU that translates and forwards data among units using J-Series messages and M-Series messages. An FJU can function in one of the configurations illustrated in Figure 4.1-1. These configurations are described below:
 - (1) Forwarding JTIDS Unit A (FJUA). A unit communicating on both Link 11 and Link 16 while forwarding information between Link 11 and Link 16 participants.

(2) Forwarding JTIDS Unit B (FJUB). A unit communicating on both Link 11 and Link 16 while forwarding information between Link 11 and Link 16 participants.

(3) Forwarding JTIDS Unit AB (FJUAB). A unit communicating on Link 16, Link 11, and Link 11B while forwarding information among Link 16, Link 11, and Link 11B participants.

j. Forwarding Participating Unit (FPU). A PU which is forwarding data between Link 11 and one or more RUs.

k. Forwarding Reporting Unit (FRU). An RU which is forwarding data between two or more RUs.

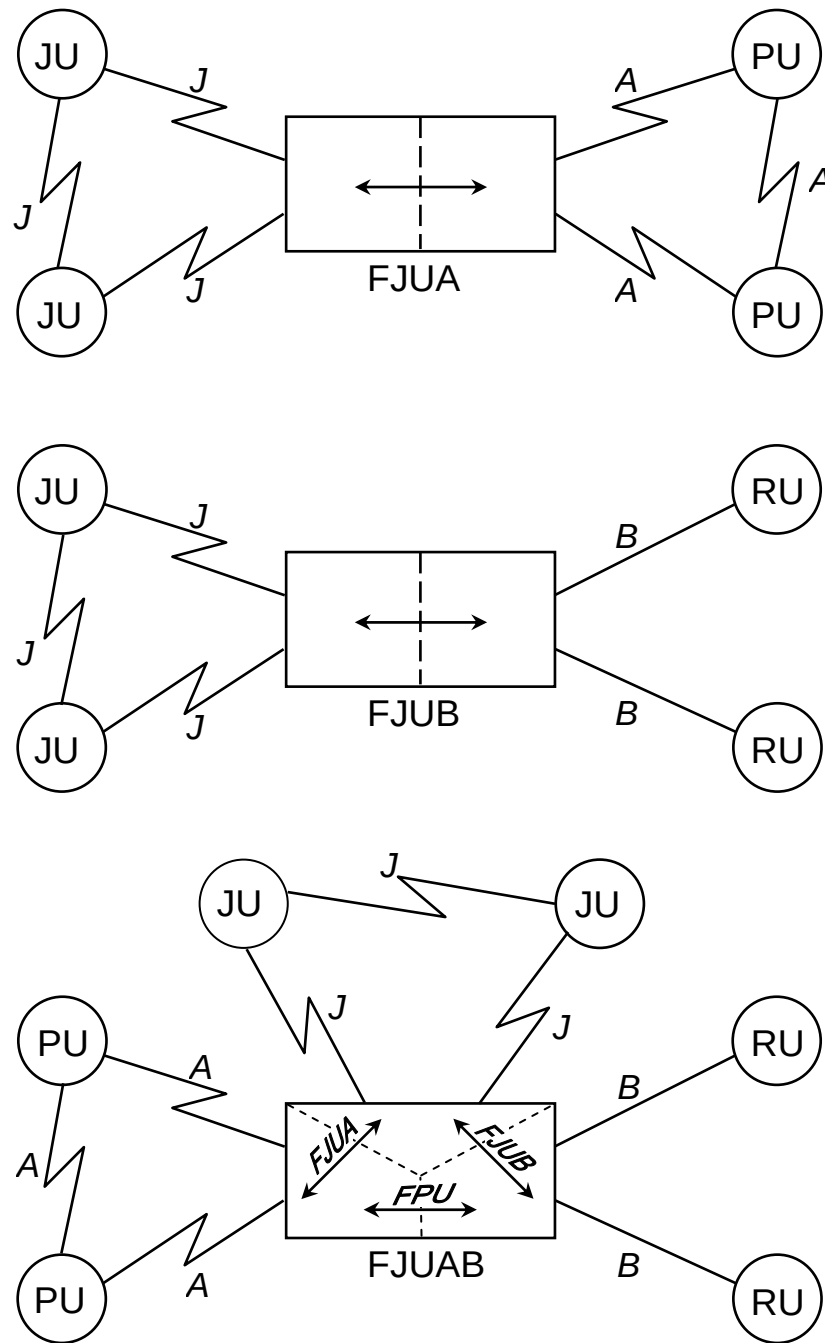


Figure 4.1-1. Representative FJU Link Configurations

4.1.3 TRACK/ADDRESS NUMBERING

A track number (TN) is used to provide a common reference number for information and directives exchanged within the interface. The reference numbers are used for both digital and voice communications to denote all IUs and/or tactical information reports, e.g., tracks. For the purpose of TN assignment, tactical information reporting includes reference numbers assigned to all tracks, strobes, bearing lines, and points exchanged on the interface. When applied to an IU, such a number is termed an address; when applied to a point, it may be an address or TN, as appropriate. In the message, the address is termed "Source TN" when used to identify the IU originating the data and is termed "Addressee TN" when used to identify the IU that is to receive the data.

4.1.3.1 TRACK NUMBER SEQUENCE AND USE

a. Whenever TNs are assigned sequentially, the sequence shall be determined by binary addition. The 19-bit Link 16 TN is composed of two 5-bit groups followed by three 3-bit groups, for a total of five characters. The 5-bit groups have a range of meaning of 0 through 7 or A through Z, less I and O. The 3-bit groups are always numeric, 0 through 7. Due to this composition, the 15-bit JU addresses are not the same as the 15 least significant bits (LSBs) of the 19-bit TN, but the 12-bit Link 11/11B TNs are the same as the 12 LSBs of the 19-bit TN. For display and database purposes, a 15-bit address is the same TN as the 19-bit TN composed of the same octal numbers. The purely numeric 5-digit Link 16 addresses and TNs are embedded between sequences containing 5-character alphanumeric TNs. By binary addition, the next 19-bit TN after the octal number 07777 is alphanumeric (octal) 0A000, not the octal number 10000. Figure 4.1-2 illustrates the composition and coding of the 19-bit TNs.

b. Table 4.1-4 specifies the complete sequence and use of Link 11, 11B, and 16 TNs. There are a total of 32,764 numeric TNs available for allocation as 15-bit addresses or 19-bit surveillance TNs (the octal numbers 00000, 00077, 00177, and 07777 cannot be allocated); and 491,520 alphanumeric TNs, each containing one or two letters, available for allocation as 19-bit surveillance TNs. Operational procedures will ensure that TNs are normally allocated in blocks which are entirely numeric or entirely alphanumeric, not

a mixture. Operational procedures will further ensure that addresses are allocated from within a block or blocks which are not allocated for use as surveillance TNs to insure against the duplicate TN situation which could occur if an address is the same as a TN within an allocated block of surveillance TNs. No specific block(s) of TNs is reserved for this purpose, although testing or operational experience may dictate the need to do so. In an interface with Link 11 and/or 11B units, the block of TNs allocated as JU addresses should be below the octal number 07777 to ensure that a JU has one and only one TN throughout a Link 11/11B/16 interface. Furthermore, operational procedures will ensure that C² JUs which expect to exchange addressed messages with Link 11/11B units must be assigned an address below the octal number 00176.

19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1
0 - 7 or A - Z*					0 - 7 or A - Z*					0 - 7			0 - 7			0 - 7		
5					5					3			3			3		

* Except I and O

<u>5-Bit Group</u>				<u>3-Bit Group</u>	
<u>CODE</u>	<u>CHAR</u>	<u>CODE</u>	<u>CHAR</u>	<u>CODE</u>	<u>CHAR</u>
00000	0	10000	J	000	0
00001	1	10001	K	001	1
00010	2	10010	L	010	2
00011	3	10011	M	011	3
00100	4	00100	N	100	4
00101	5	10101	P	101	5
00110	6	10110	Q	110	6
00111	7	10111	R	111	7
01000	A	11000	S		
01001	B	11001	T		
01010	C	11010	U		
01011	D	11011	V		
01100	E	11100	W		
01101	F	11101	X		
01110	G	11110	Y		
01111	H	11111	Z		

FIGURE 4.1-2. 19-bit Track Number Composition and Coding

MIL-STD-6016B

TABLE 4.1-4. JTIDS/MIDS Track Number Sequence and Use ¹

TN RANGE	NO. OF TNS	TYPE ²	USE
00000	1	N	No Statement
00001-00076	62	N	PU/FPU/FJUA/FJUAB/C ² JU Addresses
00077	1	N	Illegal (Not Used)
00100-00175	62	N	RU/FRU/FJUB/C ² JU Addresses
00176	1	N	Link 11/11B/16 Pseudo-Source Track Number
00177	1	N	Collective Address
00200-07776	3,967	N	Link 11/11B/16/IJMS Surveillance TNS or JU Addresses
07777	1	N	Illegal (Not Used)
0A000-0Z777	12,288	AN	Link 16 Surveillance TNS
10000-17777	4,096	N	Link 16/IJMS Surveillance TNS or JU Addresses
1A000-1Z777	12,288	AN	Link 16 Surveillance TNS
20000-27777	4,096	N	Link 16/IJMS Surveillance TNS or JU Addresses
2A000-2Z777	12,288	AN	Link 16 Surveillance TNS
.			
.			
.			
70000-77776	4,095	N	Link 16/IJMS Surveillance TNS or JU Addresses
77777	1	N	Network Manager Address
7A000-7Z777	12,288	AN	Link 16 Surveillance TNS
A0000-ZZ777	393,216	AN	Link 16 Surveillance TNS

Notes

1. All JUs shall be capable of accepting all legal track numbers described in this table. JUs that assign TNS shall also be capable of assigning all legal TNS.

2. N = Numeric (5 octal numbers, 15-bit or 19-bit; in 19-bit numeric TN, bits 19, 18, 14, and 13 must be 0).

AN = Alphanumeric (19-bit, 5 characters; first and/or second character must be letter A-Z (less I and O), last three must be octal numbers).

4.1.3.2 ADDRESS ALLOCATION

The octal number 00000 is reserved as No Statement. The octal number 77777 is reserved as the Network Manager address. (The actual unit address for the Network Manager will not be the octal number 77777.) The octal number 00176 is reserved as the pseudo source track number address (See Appendix C, Data Forwarding). The octal number 00177 is reserved as a collective address and is not assignable as a unit address. The octal numbers 00077 and 07777 are illegal (not used) for use on the interface. Addresses for units operating on Link 11 (PUs, FPU, FJUAs, and FJUABs) shall be assigned from the block of octal numbers 00001 through 00076. Addresses for units operating on Link 11B (RUs, FRUs, and FJUBs) shall be assigned addresses from the block of octal numbers 00100 through 00175. C² JU addresses shall be assigned from the blocks of octal numbers 00001 through 00076, 00100 through 00175, 00200 through 07776, and 10000 through 77776. To exchange addressed messages with Link 11/11B units, a C² JU must be assigned an address from the blocks of octal numbers 00001 through 00076 and 00100 through 00175. Addresses for nonC² JUs shall be assigned from the blocks of octal numbers 00200 through 07776 and 10000 through 77776.

4.1.3.3 TRACK NUMBER ALLOCATION

Based upon each interfacing system's requirements, blocks of contiguous numbers shall be allocated to each system for use in reporting tactical information. A system may subdivide its block(s) for allocation to subordinate units. Each unit should be allocated a larger number of TNs than its local track capacity to provide the capability to report tracks when some of its TNs are being used by other units as a result of shifts in reporting responsibility (R²).

TN blocks are assigned to PUs, FPU, RUs, FRUs, FJUAs, FJUBs, and FJUABs from the octal numbers 00200 through 07776. TN blocks are assigned to C² JUs from the octal numbers 00200 through 07776 (low TNs), 10000 through 77776 (high TNs), and alphanumeric (octal) block 0A000 through ZZ777 (high TNs). In an interface with Link 11 or Link 11B units, the block of TNs allocated to C² Units for the reporting of tracks, points, or lines of bearing (LOBs) should be limited (when possible) to values below the octal number 07777 so that the TN can be equated to the Link 11/11B TN. When track volume requires

additional numbers, TN values greater than the octal number 07777 may be used but the equating of TNs will not be possible. In a mixed IJMS/Link 16 environment, the TN block(s) should be limited (when possible) to values below the octal number 77777 so that the TN can be equated to the Link 16/IJMS TN. If additional TNs are required, Track Numbers greater than 77777 octal may be used but the equating of TNs will not be possible. Systems operating on more than one data link shall, equate TNs between the links, such that the decimal value representation will be the same. To accomplish this, systems must be assigned track blocks among multiple links to allow for equating of TNs.

It is understood that there will be instances that will preclude limiting track numbers. It is also understood that even if track numbers are limited there will be instances where a unit will be unable to equate TNs because of a specific TN in use. In both of these cases, TNs will not be able to be equated.

C² JUs shall be capable of accepting a minimum of two separate noncontiguous blocks of TNs, including a low TN block and a high TN block, from any of these specified ranges. An FJU shall also be capable of accepting a Data Forwarding TN block in the range 00200-07776 for use in TN association. The Data Forwarding TN block is not required to be contiguous with or a subset of the low TN block allocated to the FJU's host IU.

Table 4.1-4 summarizes the allocation of TNs.

4.1.3.4 ADDRESS ASSIGNMENT

Each interfacing unit on Link 16 shall be assigned a specific TN for use as its address prior to joining the interface. An interfacing unit on Link 16 shall be capable of accepting any assigned address within the range of TNs allocated as addresses.

4.1.3.5 TRACK NUMBER ASSIGNMENT

Each subset of tactical information including air tracks, surface (maritime) tracks, subsurface (maritime) tracks, land (ground) tracks, bearings, fixes, and/or points, that is originated by a unit and reported within the interface

shall be assigned a TN from the block(s) allocated to that system or unit. In addition, all C² units shall have the capability to manually assign individual TNs outside their allocated block. Each system shall ensure that two different tracks are not reported using the same TN, and that multiple TNs are not assigned to the same track. Each system may establish its own criteria for the initiation of tracks and for TN assignment and reporting within the interface. An SU shall be assigned a TN from the parent IU or unit TN allocation.

4.1.3.6 TRACK NUMBER ACCOUNTABILITY

Each C² IU shall be responsible for maintaining accountability of TNs. Once a TN has been assigned for reporting tactical information, that TN shall be associated with that track data for as long as the data are reported within the interface, regardless of which unit is reporting the data. Each C² JU shall normally assign TNs from its allocated block(s), cycling through the block(s) and skipping those numbers known to be in use. After an IU has cycled through the block(s) for the first time, TNs must be reassigned again, skipping those in current use, in such a way to preclude the confusion that can occur when the reporting of specific data is terminated and the TN is immediately reassigned. When both a low TN and a high TN block are allocated, the low TNs shall be eligible for reassignment when the upper limit of the low TN block is reached. Normally, the high TNs will be assigned only when no low TN is eligible for assignment or reassignment. Data filters, lack of correlation, or other problems may prevent a C² JU from recognizing that a track is being reported with a given TN. As a result, either or both of two ambiguous conditions may occur:

a. Dual Designation/Track Number Conflict. The same track is being reported by two or more units using two or more different TNs. Procedures for the prevention (i.e., correlation) and resolution of dual designations are described in paragraphs 4.4.4.3.1 and 4.7.3, respectively.

b. Duplicate TNs. The same TN is being used by two or more units to report two or more different tracks.

4.1.3.7 RESOLUTION OF DUPLICATE TRACK NUMBER

The resolution of duplicate TN reporting requires that agreement be reached via voice coordination among the conflicting units as to which track will carry the TN in use. All other tracks in question shall then be assigned their own specific TN. To minimize the probability of duplicate TNs, each unit shall assign TNs sequentially from its allocated block(s), cycling through the block(s) and skipping those numbers known to be in use.

4.1.4 DATA REGISTRATION

Data registration is a condition of correct relative alignment between local and remote track positional data. It involves measuring, computing, converting, transforming and adjusting positional data. Optimum interface data registration occurs when all the IUs hold their locally derived track positional data at the same geodetic position as the remote positional data for the same interface tracks. Geodetic position is defined in terms of latitude, longitude, and altitude in reference to an earth model.

The exchange of track positional data is fundamental to the operation of an interface. IUs which receive these reported tracks must attempt to correlate these tracks with local data. The correlation process is compounded as either the remote or local positional errors increase. The combination of remote track positional errors coupled with local track positional errors may result in dual designations.

In addition to accuracy requirements for track correlation, the use of remote data by systems using over-the-horizon targeting and remote intercept control have increased remote positional accuracy requirements.

4.1.4.1 DATA REGISTRATION ERROR SOURCES

Identified in this subsection are sources of error in data registration that occur in each of the participating IUs. The magnitude of the errors varies according to the characteristics and configuration of each IU. For example, a stationary JU which has been accurately surveyed has less potential errors in the PPLI reports than a moving JU with limited navigational capability. Each individual IU has various combinations of sensors, data processors,

software techniques, etc., which comprise the total operational configuration.

The errors which impact data registration have been identified as follows:

- a. Geodetic position errors.
- b. Sensor errors.
- c. Data processing errors.
- d. Remote unit errors.

Table 4.1-5 summarizes these error sources. They are discussed in greater detail in the paragraphs that follow.

4.1.4.1.1 GEODETTIC POSITION ERRORS

Geodetic position errors are associated with each JU's ability to determine its position in terms of geodetic latitude, longitude, and altitude. They are defined as the difference between the JU's reported position and the JU's position relative to the reference spheroid (normally World Geodetic System-84 (WGS-84)). Stationary JUs usually determine geodetic position through site surveys which are accomplished prior to link participation. Moving JUs derive geodetic position in real-time from the JU's navigation systems and other navigation aids (e.g., OMEGA, Tactical Air Navigation (TACAN), Global Positioning System (GPS), etc.).

TABLE 4.1-5. Summary of Data Registration Error Sources

ERROR SOURCES	CAUSE OF ERROR	COMMENT
GEODETIC POSITION	INABILITY TO LOCATE OWN UNIT'S POSITION RELATIVE TO AN EARTH MODEL (NORMALLY WGS-84) .	ERROR IN GEODETIC LONGITUDE ERROR IN GEODETIC LATITUDE ERROR IN ALTITUDE
SENSOR (ALIGNMENT AND CALIBRATION)	BIAS ERRORS IN THE JU SENSOR'S AZIMUTH ORIENTATION, VERTICAL ORIENTATION (NORMAL TO TANGENT PLANE AT GEODETIC POSITION), AND RANGING MEASUREMENTS.	ERROR IN SENSOR AZIMUTH ERROR IN SENSOR ELEVATION ERROR IN SENSOR RANGE NOTE: ERRORS IN THE NORTH SEEKING DEVICE ARE INCLUDED IN THE SENSOR AZIMUTH ERROR.
DATA PROCESSING	A. COORDINATE SYSTEMS B. TRANSFORMATIONS AND CONVERSIONS C. BASIC ALGORITHMS UTILIZED D. TRACK REPORT EXTRAPOLATION	THESE ERRORS ARE RELATED TO CONSIDERATIONS SUCH AS TYPE OF DIGITAL FILTER USED, TRACKING ALGORITHMS IMPLEMENTED, ACCURACY OF TRANSFORMATION EQUATIONS, AND CONSIDERATION OF TRACK POSITIONAL-TIME RELATIONSHIPS.
REMOTE UNITS	RESIDUAL ERRORS THAT ARE ASSOCIATED WITH REMOTE UNITS.	PERFORMED ON INDIVIDUAL REMOTE UNITS WITH CORRECTION FACTORS CALCULATED IN TERMS OF MEAN TRANSLATIONAL AND MEAN ROTATIONAL PARAMETERS. THESE FACTORS ARE APPLIED TO POSITIONAL DATA RECEIVED FROM EACH INDIVIDUAL REMOTE UNIT.

Geodetic position errors affect the position reported in PPLI messages and the location of the coordinate center used for coordinate transformation equations. Coordinate transformations are performed between the JU's local tangent plane and geodetic position. If geodetic position errors are significantly large, not only are the reported tracks subjected to position errors, but also the JU's ability to correctly correlate/decorrelate local and remote tracks is seriously degraded.

Geodetic position errors are expressed as follows:

- a. Delta longitude.
- b. Delta latitude.
- c. Delta altitude.

4.1.4.1.2 SENSOR ERRORS

Inherent in the operation of active and passive sensors are procedures required to align and calibrate the sensors' measurement systems. Normally, these procedures are accomplished prior to participation in an interface. However, due to errors in the basic alignment procedures and random measurement variables, i.e., noise drifts, index of refraction, etc., the sensor may be subjected to significant errors. These sensor errors are identified as follows:

- a. Elevation errors.
- b. Azimuth errors.
- c. Ranging errors.

In addition, the inability of the JU to correctly sense north orientation introduces another source of error. This error, however, is compensated for when corrections are applied in the sensor's azimuth alignment during the sensor error correction process.

4.1.4.1.3 DATA PROCESSING ERRORS

Data processing errors arise from the coordinate systems utilized, the equations used with coordinate system transformations and conversions, the basic algorithms employed in the data processing, and the procedures used to extrapolate the measured data from the time of observation to the reported time.

Typical coordinate systems utilized by the JUs include the sensor oriented system that uses range, azimuth, and elevation; the rectangular coordinate system oriented in the tangent plane that uses north, east, and up; and the geodetic system which is usually modeled to WGS-84. These systems are used to transform the JU's sensor data into track position and velocity data which are used in the tracking function. The tracking function includes processes such as data smoothing, track initiation, and track updating. The equations utilized for these transformations may cause errors in excess of acceptable levels if they are not implemented to reflect accuracy requirements.

In addition, software supporting algorithms such as sine and cosine routines must also be implemented in such a manner as to minimize inaccuracies.

Extrapolation of track data must also be considered within data processing schemes. It is incumbent upon each JU to ensure that track positions accurately reflect time of observation. This is done by time tagging. Extrapolation and time tagging of tracks can ensure that the local/remote correlation and decorrelation process can account for time and position differences.

4.1.4.1.4 REMOTE IU ERRORS

All IUs which originate track positional data are subject to the errors noted above. It is anticipated that all units will attempt to minimize such errors. Under optimum conditions the results of these efforts will cause the overall data registration picture (local-to-remote differences) to be acceptable. However, under operational conditions it can happen that one or more units will have residual errors which cause unacceptable differences in local-to-remote positional data. Remote IU errors are measured by observing the positional difference between local track positions and remote track

positions received from a specific remote unit. Remote IU errors are due to differences in geodetic and sensor registration between own unit and a selected remote IU.

4.1.4.2 DATA REGISTRATION MONITORING AND ADJUSTMENT PROCEDURES

Each JU which participates in the Surveillance function and has the capability to initiate or assume R^2 for surveillance tracks shall have the capability to perform data registration. These JUs shall have the capability to make periodic adjustments in accordance with the following generalized criteria:

a. JUs shall have the capability to perform monitoring and adjustment of data registration procedures using automatic or manual means.

b. Monitoring and computing of data registration should be performed with minimal interference to, or curtailment of, normal data system operation.

c. Results of data registration monitoring and adjustments shall be available for operator appreciation.

The procedures that are required to minimize the data registration errors identified in paragraph 4.1.4.1 are as follows:

a. Geodetic registration.

b. Sensor registration.

c. Data processing accuracy.

d. Remote unit registration.

Figure 4.1-3 is a simplified diagram of a typical data registration process. Figures 4.1-4 and 4.1-5 contain descriptions of the various coordinate systems used in the data registration process. The sensor system consists of range, azimuth, and elevation expressed as R, AZ, and EL respectively. R, AZ, and EL data are then transformed into an IU coordinate set defined with

X, Y, and Z where X equals east, Y equals true north and Z equals geodetic vertical. For JTIDS interface operation, the X, Y, and Z data are transformed into the Geodetic Coordinate System. This system is modeled using WGS-84 with target location expressed as ϕ for geodetic latitude, λ for geodetic longitude, and H for altitude.

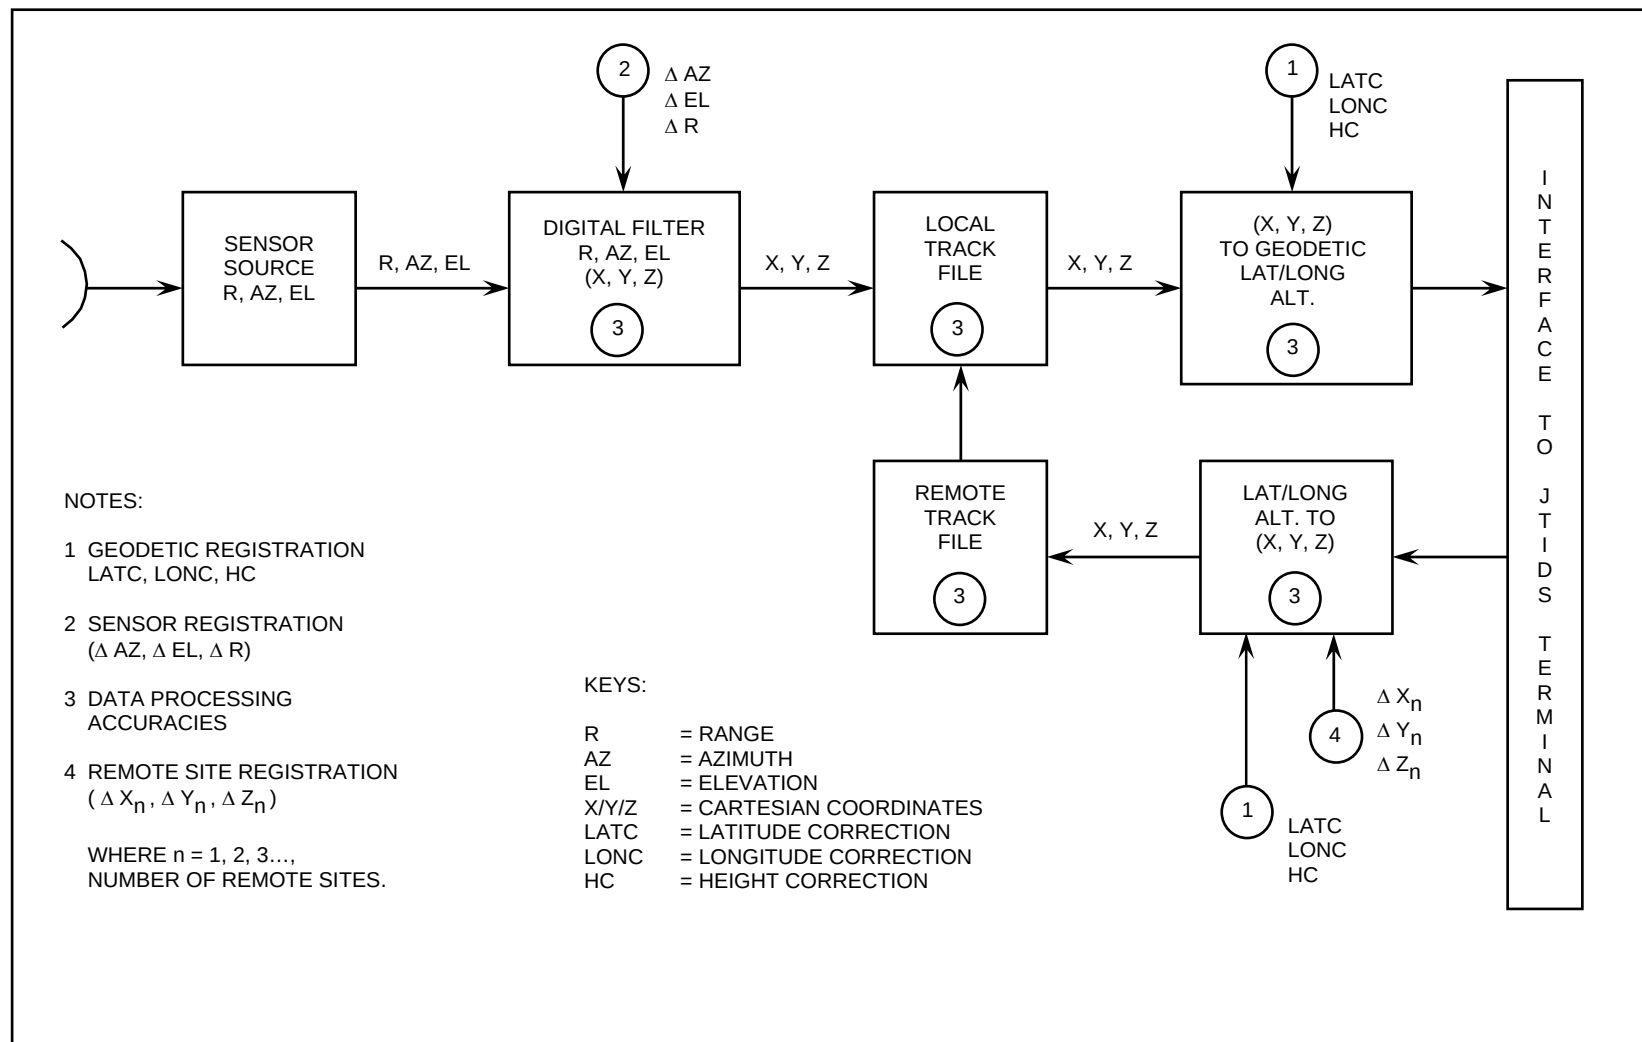


Figure 4.1-3. Simplified Diagram of Data Registration Process

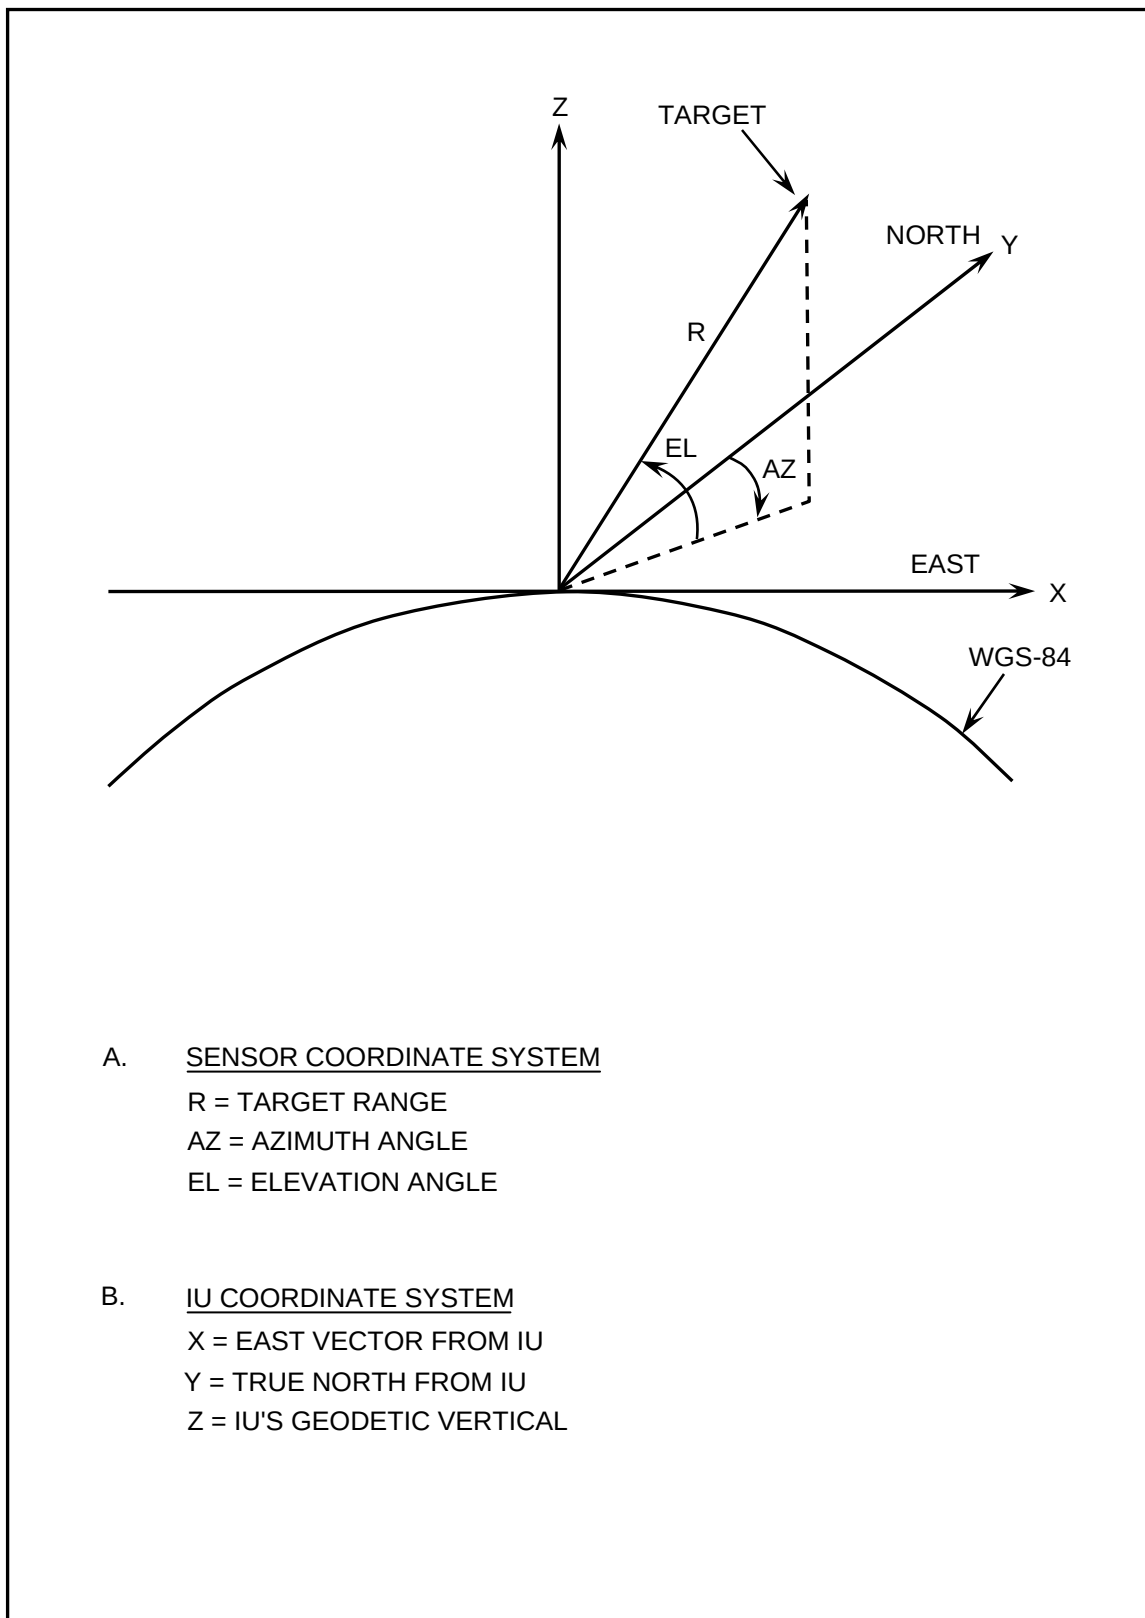


FIGURE 4.1-4. Description of Sensor and IU Coordinate Systems

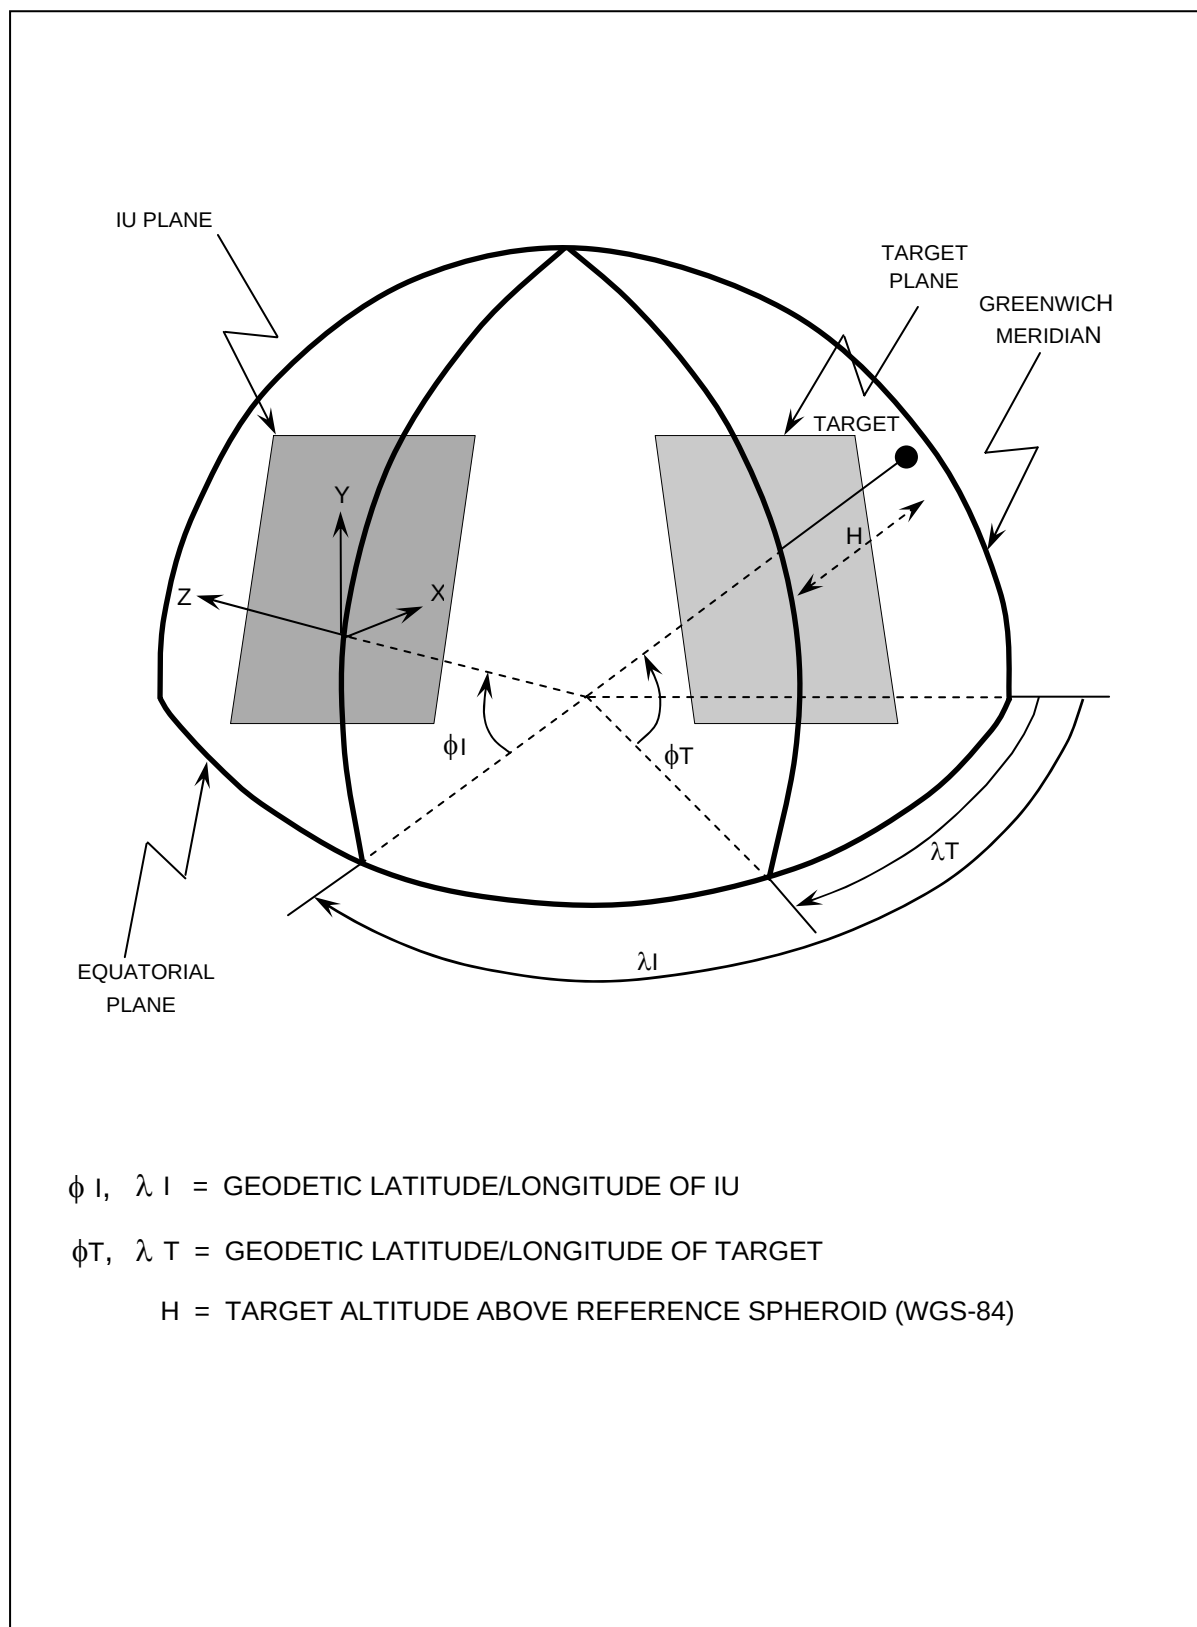


Figure 4.1-5. Description of Geodetic Coordinate System

4.1.4.2.1 GEODETTIC REGISTRATION

Geodetic registration is defined as a process in which a JU monitors its reported geodetic positional data and periodically adjusts this geodetic data with information derived from active participation in the JTIDS/MIDS Relative Navigation function. Geodetic registration begins with a capability of the JU to determine and maintain accurate positional coordinates in terms of geodetic latitude, longitude, and altitude. Monitoring of relative geodetic position is provided by active participation in the JTIDS/MIDS Relative Navigation function during netted operation. Through active participation in the JTIDS/MIDS Relative Navigation function, highly accurate adjustments to the reported geodetic position are obtainable. The JTIDS/MIDS terminal will provide Relative Navigation adjustments to the host platform in terms of latitude correction (LATC), longitude correction (LONC), and altitude correction (HC). These correction factors shall be periodically applied to the own unit's latitude, longitude, and altitude used for the coordinate transformations defined in paragraph 4.1.4.2.3.

4.1.4.2.2 SENSOR REGISTRATION

Sensor registration is the process of determining and maintaining the correct alignment of the sensor elements used for the measurement of a tracked object's position. Monitoring is accomplished by comparing the geodetic position of a remote unit reported in the PPLI messages and the remote unit's position observed through active local sensors. This procedure requires that each JU periodically monitor the remote units and, through analysis techniques, calculate the mean correction variations in terms of difference in azimuth expressed as ΔAZ , difference in elevation expressed as ΔEL , and difference in range expressed as ΔR .

Each JU which participates in the Surveillance function shall have the capability to periodically monitor sensor registration using remote unit PPLI messages and local sensor returns. Periodically, the JU shall adjust sensor registration in accordance with the following criteria:

- a. Remote IUs which are used in the sensor registration process may be selected either manually or automatically.

b. The statistical method used in determining sensor errors shall consider:

- (1) The sampling interval.
- (2) The minimum number of remote units necessary to ensure reliable data.
- (3) PPLI position, azimuth, and time quality values.
- (4) Quadrant distribution of the remote IUs used.
- (5) Maximum and minimum range criteria of remote units; and
- (6) Altitude data availability in both the received PPLI messages and local sensor data.

c. Results of the sensor registration shall be available for operator appreciation in the form of Δ AZ, Δ EL, and Δ R.

d. It is a design goal that the sensor registration process detect and correct sensor errors so that the azimuth/elevation angle errors shall not exceed one-half degree and range errors shall not exceed 500 feet.

4.1.4.2.3 DATA PROCESSING ACCURACY

This paragraph discusses the data processing accuracies required of a participating JU when calculating, converting, and transforming local and remote track data. These accuracies are directly related to the basic equations used to perform the various conversions and transformations, the assumptions and algorithms used in this process, and the time and position relationship associated with the track information. The track data requirements specified in this paragraph apply to positional data received in J2 and J3 messages, as well as locally derived data.

Each JU must include in its local and remote track data processing the time tag associated with a track position report. JUs shall ensure that all track

positions are extrapolated when local and remote correlation and decorrelation is performed.

In addition to the extrapolation requirement, the JU must insure that the equations and assumptions employed in the processing, conversion, and transformation of positional data conform to the following accuracy requirements:

a. The processing accuracy of locally input positional coordinates into geodetic latitude, longitude, and altitude coordinates shall be within plus or minus 60 feet.

b. The processing accuracy of remote data such as latitude, longitude, and altitude into local database coordinates shall be within plus or minus 60 feet.

c. When positional data are received by an FJU, the processing accuracy of the forwarded positional data shall be within plus or minus 60 feet.

d. The processing accuracy for the conversion of (X dot, Y dot) velocity coordinates into course and speed, or the conversion of course and speed into (X dot, Y dot) coordinates shall be within plus or minus .1 dm/hr for linear parameters and plus or minus .05 degrees for course.

The required data processing accuracy shall be obtainable within the following positional and geographical limits:

a. The distance of the track from the receiving or transmitting unit is less than 250 data miles.

b. The geodetic latitude of the JU is between 70° south latitude and 70° north latitude.

c. The geodetic altitude of the track is between 120,000 feet above and 1,000 feet below the reference spheroid measured along the geodetic vertical.

MIL-STD-6016B

The above accuracy requirements are based on a comparison with exact mathematical conversions and transformations using the WGS-84 earth model as the reference spheroid with the following parameters:

a. Primary parameters are as follows:

(1) Semi-Major axis, a is equal to 6,378,137 meters
(3,487.607721 data miles).

(2) Flattening, f is equal to $1/298.257223563$.

b. Secondary parameters are as follows:

(1) Semi-Minor axis, b is equal to 6,356,752.3142 meters
(3,475.9144 data miles).

(2) Major Eccentricity, $e = 0.0818191908426$.

Standard units of measure are as follows:

a. 1 nautical mile is equal to 1,852 meters, (International Nautical Mile adopted by Department of Defense (DOD), 1 July 1954).

b. 1 ft is equal to 0.3048 meters (DOD Standard 1476, 1 August 1977).

c. 1 data mile is equal to 6,000 feet (U.S.) = 1,828.8 meters.

d. 1 nautical mile is equal to 1.012685914 data miles.

To prevent any ambiguity, the geodetic latitude and longitude data exchanged in the interface are defined as WGS-84 latitude and longitude.

The exact mathematical equations depicted in Figure 4.1-6 shall be used by tactical data systems using orthogonal projections as the standard for comparison when determining a system's capability to meet the accuracy requirements of paragraph 4.1.4.2.3. Tactical data systems using other projections, e.g., stereographic, shall use equations that also meet the stated accuracy requirements.

DEFINITION OF TERMS

ϕ_s	=	Geodetic latitude, degrees	} System coordinate center position
λ_s	=	Geodetic longitude, degrees	
h_s	=	geodetic height, data miles (distance between reference spheroid and coordinate center measured along geodetic vertical, positive above spheroid).	
ϕ_t	=	Geodetic latitude, degrees	} Track or point position
λ_t	=	Geodetic longitude, degrees	
h_t	=	geodetic height, data miles (distance between reference spheroid and track (or point) measure along the geodetic vertical, positive above spheroid).	
X_t	}	= X, Y, and Z coordinates in data miles of a track or point measured relative to an orthogonal right-handed coordinate system whose center is located at (ϕ_s, λ_s, h_s) with Y-axis aligned with true north, X-axis aligned with east, and Z-axis aligned with the geodetic vertical.	
Y_t			
Z_t			
a	=	Semi-major axis of the reference spheroid; this will be 3,487.607721 data miles for WGS-84 earth model.	
e^2	=	Square of earth model eccentricity; this will be 0.00669437999013 for WGS-84 earth model.	

FIGURE 4.1-6. Mathematical Equations Using Orthogonal Projections (1 of 5)

TRANSFORMATION FROM LOCAL TANGENT PLANE CARTESIAN COORDINATES
EXPRESSED AS X, Y, Z, TO GEODETIC LATITUDE, LONGITUDE AND HEIGHT

Given: (X_t, Y_t, Z_t) and (ϕ_s, λ_s, h_s)

Find: (ϕ_t, λ_t, h_t)

Determine ϕ_t'

$$\text{where } \phi_t' = \tan^{-1} \left[\frac{(E+K) \cos L}{C} \right] \text{ and } \begin{cases} E = [A_s (1-e^2) + h_s + Z_t] \sin \phi_s + Y_t \cos \phi_s \\ C = (A_s + h_s + Z_t) \cos \phi_s - Y_t \sin \phi_s \\ L = \tan^{-1} \left(\frac{X_t}{C} \right) \\ A_s = \frac{a}{\sqrt{1-e^2 \sin^2 \phi_s}} \end{cases}$$

and K is determined by iteration as follows: Set $K'=0$, and compute K

$$\text{where } K = \frac{k_2 (E+K')}{\sqrt{\frac{R^2}{1-e^2} + (E+K')^2}} \quad \text{and} \quad \begin{cases} k_2 = \frac{ae^2}{\sqrt{1-e^2}} \\ R = \frac{C}{\cos L} \end{cases}$$

if $|K| - |K'| > 10^{-5}$, set $K' = K$, and recompute K .

then

$$\begin{array}{ll} \phi_t = \phi_t', & \text{if } -90^\circ \leq \phi_t' \leq 90^\circ \\ \phi_t = \phi_t' - 180^\circ, & \text{if } \phi_t' > 90^\circ \\ \phi_t = \phi_t' + 180^\circ, & \text{if } \phi_t' < -90^\circ \end{array}$$

$$\lambda_t = \lambda_s + L$$

$$h_t = \left[\frac{R}{\cos \phi_t} \right] - \left[\frac{a}{\sqrt{1-e^2 \sin^2 \phi_t}} \right]$$

FIGURE 4.1-6. Mathematical Equations Using Orthogonal Projections (2 of 5)

TRANSFORMATION FROM GEODETIC LATITUDE, LONGITUDE AND HEIGHT TO
LOCAL TANGENT PLANE CARTESIAN COORDINATES EXPRESSED AS X, Y, Z

Given: (ϕ_t, λ_t, h_t) and (ϕ_s, λ_s, h_s)

Find (X_t, Y_t, Z_t)

$$X_t = (A_t + h_t) \cos \phi_t \sin (\lambda_t - \lambda_s)$$

where $A_t = \frac{a}{\sqrt{1 - e^2 \sin^2 \phi_t}}$

$$Y_t = (A_t + h_t) [\cos \phi_s \sin \phi_t - \sin \phi_s \cos \phi_t \cos (\lambda_t - \lambda_s)] - \Delta K \cos \phi_s$$

where $\Delta K = e^2 (A_t \sin \phi_t - A_s \sin \phi_s)$

and $A_s = \frac{a}{\sqrt{1 - e^2 \sin^2 \phi_s}}$

$$Z_t = (A_t + h_t) [\cos \phi_s \cos \phi_t \cos (\lambda_t - \lambda_s) + \sin \phi_s \sin \phi_t] - A_s - h_s - \Delta K \sin \phi_s$$

FIGURE 4.1-6. Mathematical Equations Using Orthogonal Projections (3 of 5)

CONVERSION OF TRACK COURSE AND SPEED TO LOCAL TANGENT
PLANE CARTESIAN COORDINATES EXPRESSED AS $\dot{X}$ AND $\dot{Y}$

Given: (ϕ_t, λ_t, h_t) and (ϕ_s, λ_s, h_s)

where θ_t is the track course, degrees relative to
true north at track position

and S_t is the track speed, data miles/hour (dm/h)

Find: $\dot{X}$ and $\dot{Y}$

Assume $\dot{h}_t = 0 \text{ dm/hr}$

then

$$\dot{X} = S_t [(\sin\theta_t \cos\Delta\lambda) - (\cos\theta_t \sin\phi_t \sin\Delta\lambda)]$$

$$\dot{Y} = S_t [\sin\theta_t \sin\phi_s \sin\Delta\lambda + \cos\theta_t (\sin\phi_s \sin\phi_t \cos\Delta\lambda + \cos\phi_s \cos\phi_t)]$$

Where $\Delta\lambda = \lambda_t - \lambda_s$

FIGURE 4.1-6. Mathematical Equations Using Orthogonal Projections (4 of 5)

CONVERSION OF LOCAL TANGENT PLANE CARTESIAN COORDINATES
TO TRACK COURSE (θ_t) AND SPEED (S_t)

Given: (ϕ_t, λ_t, h_t) , (ϕ_s, λ_s, h_s) , and $\dot{X}, \dot{Y}$

Find Course (θ_t) and Speed (S_t)

Assume $\dot{h}_t = 0 \text{ dm/hr}$

then

$$S_t = \sqrt{\dot{U}_t^2 + \dot{V}_t^2}$$

$$\theta_t = \sin^{-1} \left(\frac{\dot{U}_t}{S_t} \right)$$

where

$$\dot{U}_t = \frac{\dot{X}}{\cos \Delta \lambda} - \frac{(\sin \theta_t \sin \Delta \lambda) (\dot{X} \sin \phi_s \tan \Delta \lambda - \dot{Y})}{(\sin \theta_t \sin \phi_s + \cos \phi_t \cos \phi_s \cos \Delta \lambda)}$$

$$\dot{V}_t = \frac{-\dot{X} \sin \theta_s \sin \Delta \lambda + \dot{Y} \cos \Delta \lambda}{(\sin \theta_t \sin \phi_s + \cos \phi_t \cos \phi_s \cos \Delta \lambda)}$$

$$\Delta \lambda = \lambda_t - \lambda_s$$

FIGURE 4.1-6. Mathematical Equations Using Orthogonal Projections (5 of 5)

4.1.4.2.4 REMOTE IU REGISTRATION

Remote IU registration is the procedure for determining data registration corrective values by comparing remote tracks received from a selected remote IU to local data and applying corrective values to positional data received from that IU. Each IU which has a capability to initiate or assume R^2 for real-time surveillance tracks will have a capability to periodically monitor its data registration relative to a selected IU and to make periodic adjustments in accordance with the following criteria:

a. Either automatic or manual selection of remote IUs for monitoring and adjustment of data registration shall be used.

b. The periodic performance of the remote IU registration procedure for selected units shall be automatically conducted at least once per monitor interval as specified in Table 4.1-6.

TABLE 4.1-6. Maximum Monitor Intervals

REMOTE IU		JU WITH $Q_{pr} \leq 3$ OR INDIRECT UNIT			IU $Q_{pr} \geq 4$
OWN UNIT		AIR	ALL OTHERS	FIXED LAND	
IU $Q_{ar} \leq 3$ OR $Q_{pr} \leq 3$	AIR	5 MINS.	10 MINS.	15 MINS.	15 MINS.
	ALL OTHERS	10 MINS.	1 HR.	1 HR.	1 HR.
	FIXED LAND	15 MINS.	1 HR.	4 HRS.	4 HRS.
IU $Q_{ar} \geq 4$ AND $Q_{pr} \geq 4$		15 MINS.	1 HR.	4 HRS.	4 HRS.

LEGEND (U)

(U) Q_{pr} - RELATIVE POSITION QUALITY(U) Q_{pr} - RELATIVE POSITION QUALITY

c. The mean translational and rotational registration errors and correction values shall be computed automatically using a minimum of 3 common tracks with track quality (TQ) greater than or equal to 4 for at least six update cycles. Azimuth separation should be at least 45° .

d. The execution of the remote IU registration should be performed without interference or curtailment of normal data system operations.

e. Results of remote IU registration shall be available for operator appreciation in the form of the most recently computed mean translational error/difference in X and Y (data miles) and the mean rotational error/difference (degrees of azimuth) for each remote IU designated for remote IU registration.

f. It is a design goal that the remote IU registration function will detect and adjust registration errors before they exceed two data miles for X and Y, and one-half degree of azimuth.

4.1.1.5 IDENTIFICATION OF DATA SOURCE

Identification of the source of data on the interface is provided by the Source TN field. The Source TN field is a discrete address assigned to each IU.

4.1.1.6 SPECIAL PROCESSING

Certain national systems provide surveillance and warning information of a particularly sensitive nature. Link 16 makes provision for the protection of the source of such information through the use of the Special Processing Indicator (SPI). The SPI shall not be used for any other purpose. In particular, setting the SPI to value 1 shall not permit any other field of the message to be encoded differently from that defined by the message standard. The setting of the SPI by units originating data shall be in accordance with national requirements. When the SPI is set to value 1, it indicates that the information in the message in which it appears requires special handling and processing as defined in the following paragraphs.

4.1.1.6.1 DATA CONSTRAINTS

a. All surveillance, warning and amplification data in messages in which the SPI is set to value 1 shall be classified SECRET, and on reception shall be afforded the protection commensurate with that classification.

b. Data protected by the SPI set to value 1 shall be transmitted on Link 16 only if the terminal or other communication path is operating in a secure mode.

c. Data protected by the SPI set to value 1 shall not be transmitted on Link 16 if there are any units on the interface which are unable to protect the data according to its classification.

4.1.6.2 FORWARDING OF DATA PROTECTED BY THE SPI

Data which is protected by the SPI set to value 1 shall not be forwarded onto unsecured links or voice circuit. A unit which is forwarding Link 16 to Link 11 shall adhere to the constraints for data protected by the SPI, in accordance with the procedures in MIL-STD 6016, Appendix C.

4.1.6.3 SECURITY FILTERING

All units which are capable of transmitting data protected by the SPI shall also implement a security transmit filter to inhibit such transmissions. The security filter shall be overridden by an Emergency or Force Tell alert on a reported entity.

4.1.6.4 CHANGE OF REPORTING RESPONSIBILITY FOR A SPI TRACK

If a C² unit assumes R² for a track which was previously reported with the SPI set to value 1, the unit shall have the option of retaining the original value or of clearing it to value 0, in accordance with national requirements.

4.1.6.5 SPECIAL PROCESSING OF EW DATA

The SPI in the J3.7 and J14.0 is used to indicate the security processing status of LOBs, AOPs, and fixes reported in those messages. The value of the SPI shall be set at the discretion of the reporting unit, in accordance with national requirements and independent of the setting of the SPI in contributing LOBs, AOPs, or fixes. However, if all contributions have their SPI set to value 1, the AOP or fix shall be reported with the SPI set to value 1.

4.1.7 RECEIPT/COMPLIANCE

Link 16 messages that are not generated in response to another message are called original messages (OMs) or original orders. Some addressed OMs have a receipt/compliance (R/C) field and require response messages to be transmitted by the receiving unit to indicate that the OM has been received and, if desired, also to indicate whether the receiving unit will accomplish the action identified in the OM. Response messages contain an R/C field which indicates the response being returned.

The receipt/compliance procedures for the messages used for Link 16 network management are different than those for operational messages. "Network management messages" as used herein refers to J0, J1, J8, and J31 series messages containing an R/C field. "Operational messages" as used herein refers to J9, J10, J12, and J14 series messages containing an R/C field. Table 4.1-7 provides the data item names, data item code values, and data item explanations for the R/C field. Table 4.1-8 specifies the applicability of the various R/C data items to the J series messages for transmission of original messages and receipt of original messages. Table 4.1-8.1 specifies the applicability of the various R/C data items to the J series messages for response to original messages and receipt of responses to original messages. Table 4.1-9 describes examples of the interchange when original and response messages are exchanged between JUs.

4.1.7.1 ORIGINAL MESSAGE

An R/C field in the OM specifies whether a response message is to be returned to the originator. If the R/C field is set to value 0, then a response message is required. If the R/C field is set to value 5, then only a machine receipt (MR) message and/or automatic computer generated response is required. If the R/C field is set to value 1, then no response message is required. The R/C field of an OM addressed to more than one unit shall be set to value 1.

4.1.7.2 MACHINE RECEIPT

A machine receipt message has the R/C field set to value 2 and shall be transmitted once by an addressed terminal upon receipt of either a valid OM

with the R/C field set to value 0 or 5 or upon receipt of a response message with the R/C field set to a value greater than 2. In the network management messages, the machine receipt is equivalent to a WILCO message. Therefore, a machine receipt for a network management OM shall only be sent if the addressed terminal can accept and execute the actions specified in the OM. The machine receipt message shall be transmitted in the time slot specified by the Recurrence Rate, Receipt/Compliance field of the message it is responding to. The machine receipt message shall be identical to the message it is responding to except in the Source TN; Relayed Transmission Indicator; Message Length Indicator; Addressee TN; R/C; and Recurrence Rate, Receipt/Compliance fields. The Recurrence Rate, Receipt Compliance field shall be set to the No Statement value in all machine receipt messages. A response message with the R/C field set to a value greater than 2 may be transmitted in lieu of the machine receipt message. A CANTPRO message must be transmitted in lieu of a machine receipt message if the addressed terminal cannot accept and execute the action specified in a network management OM.

4.1.7.3 CANNOT PROCESS RESPONSE

An appropriate CANTPRO response message shall be transmitted automatically by an addressed unit upon receipt of an OM with the R/C field set to value 0 or value 5 if the message cannot be processed. The R/C field of the CANTPRO response message shall indicate the reason the message cannot be processed. This is an automatic computer generated response and the operator need not be aware that any order has been received or that the CANTPRO response has been generated. The CANTPRO response message shall be identical to the OM it is responding to except in the Source TN; Relayed Transmission Indicator; Addressee TN; R/C; and Recurrence Rate, Receipt/Compliance fields.

TABLE 4.1-7. Receipt/Compliance (Sheet 1 of 2)

DATA ITEM	DI CODE	DUI/DI EXPLANATION
ORIGINAL ORDER	0	RECEIPT/COMPLIANCE RESPONSE REQUIRED.
ORIGINAL ORDER	1	RECEIPT/COMPLIANCE RESPONSE NOT REQUIRED. MUST BE USED IN ORIGINAL ORDER MESSAGES ADDRESSED TO COLLECTIVE ADDRESSES. THE ORIGINAL ORDER SHALL BE TRANSMITTED 3 TIMES.
MACHINE RECEIPT	2	MESSAGE RECEIVED ERROR FREE.
WILCO	3	THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER WILL COMPLY. IN THIS USAGE, THE SYSTEM COMPONENT IS HUMAN OPERATOR OR (UNMANNED VEHICLE ONLY) A MACHINE.
HAVCO	4	THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER HAS COMPLIED. IN THIS USAGE, THE SYSTEM COMPONENT MAY BE A HUMAN OPERATOR OR A MACHINE.
ORIGINAL ORDER	5	RECEIPT/COMPLIANCE RESPONSE (MR AND/OR CANTPRO ONLY) REQUIRED.
CANTCO	6	THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER CANNOT COMPLY. IN THIS USAGE THE SYSTEM COMPONENT IS A HUMAN OPERATOR OR (UNMANNED VEHICLE ONLY) A MACHINE.
CANTPRO	7	NON-SPECIFIC SYSTEM LIMITATION OR CONFLICT ¹ .
CANTPRO	8	TIME SLOT ASSIGNMENT CONFLICT DETECTED ¹ .
CANTPRO	9	CRYPTOVARIABLE NOT HELD ¹ .
CANTPRO	10	PARTICIPATION GROUP NOT DEFINED ¹ .

NOTE

- ¹ THIS IS AN AUTOMATIC COMPUTER GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.

TABLE 4.1-7. Receipt/Compliance (Sheet 2 of 2)

DATA ITEM	DI CODE	DUI/DI EXPLANATION
CANTPRO	11	APPLICABLE ASSIGNMENT TABLE FULL ¹ .
CANTPRO	12	RELAY FUNCTION SPECIFIED ALREADY HAS ASSIGNED TIME SLOT BLOCKS FOR WHICH A DIFFERENT RELAY MODE/NET NUMBER HAS BEEN SPECIFIED ¹ .
CANTPRO	13	INTERFERENCE PROTECTION FEATURES WOULD BE VIOLATED BY ACCEPTANCE OF ASSIGNMENT ¹ .
CANTPRO	14	HOST SUBSCRIBER INTERFACE IS INACTIVE AND MESSAGE IS NOT PROCESSED BY THE TERMINAL ¹ .
CANTPRO	15	TN, ADDRESSEE DOES NOT IMPLEMENT THE ACTION REQUESTED ¹ .
CANTPRO	16	ONE OR MORE TNs IN THE OM NOT HELD ¹ .
CANTPRO	17	TN, REFERENCE OR TN, FRIENDLY WEAPON IS UNDER OWN UNIT CONTROL ¹ .
CANTPRO	18	UNIT NOT EXERCISING AIR CONTROL CAPABILITY ¹ .
CANTPRO	19	UNACCEPTABLE IDENTITY ¹ .
CANTPRO	20	ADDRESSEE TRACK NUMBER IS INACTIVE ¹ .
CANTPRO	21	THE FORWARDING UNIT DID NOT RECEIVE A MACHINE RECEIPT FROM THE ADDRESSEE TRACK NUMBER ¹ .
CANTPRO	22	TN REFERENCE OR TN, FRIENDLY WEAPON IS NOT UNDER THIS UNIT'S CONTROL ¹ .
UNDEFINED	23-30	
NO STATEMENT	31	

NOTE

- ¹ THIS IS AN AUTOMATIC COMPUTER GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.

MIL-STD-6016B

TABLE 4.1-8. Applicability of Receipt/Compliance Values for Transmission of Original Message and Receipt of Original Message

		R/C VALUE					
		0	1	2	5	3-4, 6-31	
MESSAGE	J0.3	O		M		N	
	J0.4	O		M			
	J0.6	O	O	M			O
	J1.4	TBD					T
	J1.5	TBD				A	
	J1.6	TBD					
	J8.0	TBD					
	J9.0	O	(1)	M			P
	J9.1		O	M	O	P	
	J9.2	TBD				L	
	J10.3	O		M		I	
	J12.0	(2)	(2)	M	(2)	C	
	J12.1	O		M	O	A	
	J12.4	O		M		B	
	J14.2	(3)	(4)	M		L	
J31.0	O		M		E		
J31.1	O		M				

LEGEND

O = value eligible to be transmitted by originator of Original Message.

M = value eligible to be transmitted as a Machine Receipt by unit in receipt of Original Message.

NOTES

(1) Not applicable when Command = 2-4, 7, 9, 12-15, or 18-25.

(2) See Table J12-2 in Section 5 for applicability by MAD for originator of Original Message.

(3) Not applicable when EWAC = 7-12 or 26.

(4) Not applicable when EWAC = 0, 2, 3, 17, 19, 21, or 22.

TABLE 4.1-8.1. Applicability of Receipt/Compliance Values for Transmission of Response to Original Message and Receipt of Response to Original Message

		R/C VALUE																					
		2	3	4	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	0,1,5,23-31	
MEASUREMENTS	J0.3	R				T	T	T	T	T		T		T								NOT TESTED	
	J0.4	R				T	T	T	T	T	T	T		T									
	J0.6	R				T		T	T				T	T									
	J1.4	TBD																					NOT TESTED
	J1.5	TBD																					
	J1.6	TBD																					
	J8.0	TBD																					APPROXIMATE
	J9.0	R	T	T	T	T								T	T	T	T	T	(1)	(1)	T		
	J9.1	R				T								T	T								
	J9.2	TBD																					
	J10.3	R	T		T	T								T	T	T	T	T	(1)	(1)	T		
	J12.0	R	T	T	T	T								T	T							CABLE	
	J12.1	R	T	T	T	T								T									
J12.4	R	(2)	(2)	(2)	(2)								T										
J14.2	R	(3)	(3)	(3)	T								T					(1)	(1)				
J31.0	R				T		T						T										
J31.1	R		T		T		T						T										

LEGEND

T = value eligible to be transmitted in response to an Original Message.

R = value eligible to be transmitted by unit in receipt of response to Original Message (i.e. the originator of the Original Message).

NOTES

- (1) Applicable only in response message originated by FJU.
- (2) Not Applicable when Control Change Indicator = 2.
- (3) Not applicable when EWAC = 7-12 or 26.

TABLE 4.1-9. Message Transfer Sequence for Receipt/Compliance (Sheet 1 of 6)


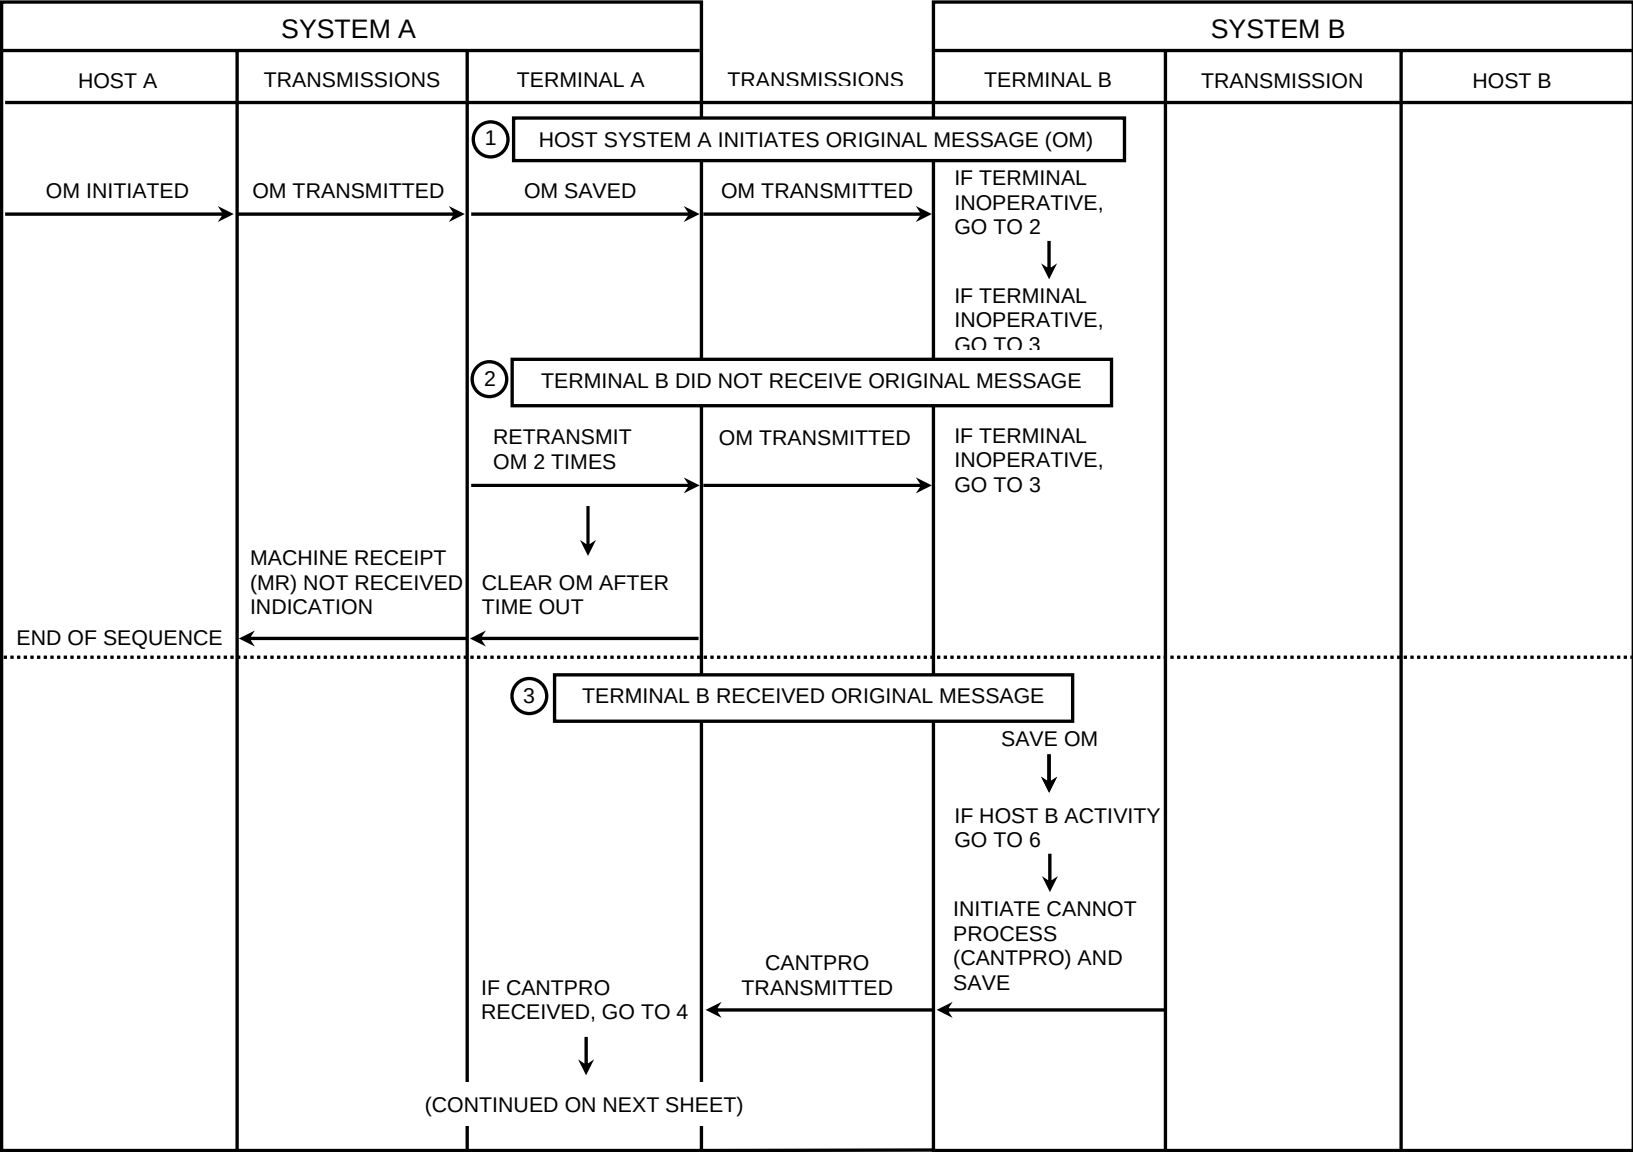


TABLE 4.1-9. Message Transfer Sequence for Receipt/Compliance (Sheet 2 of 6)

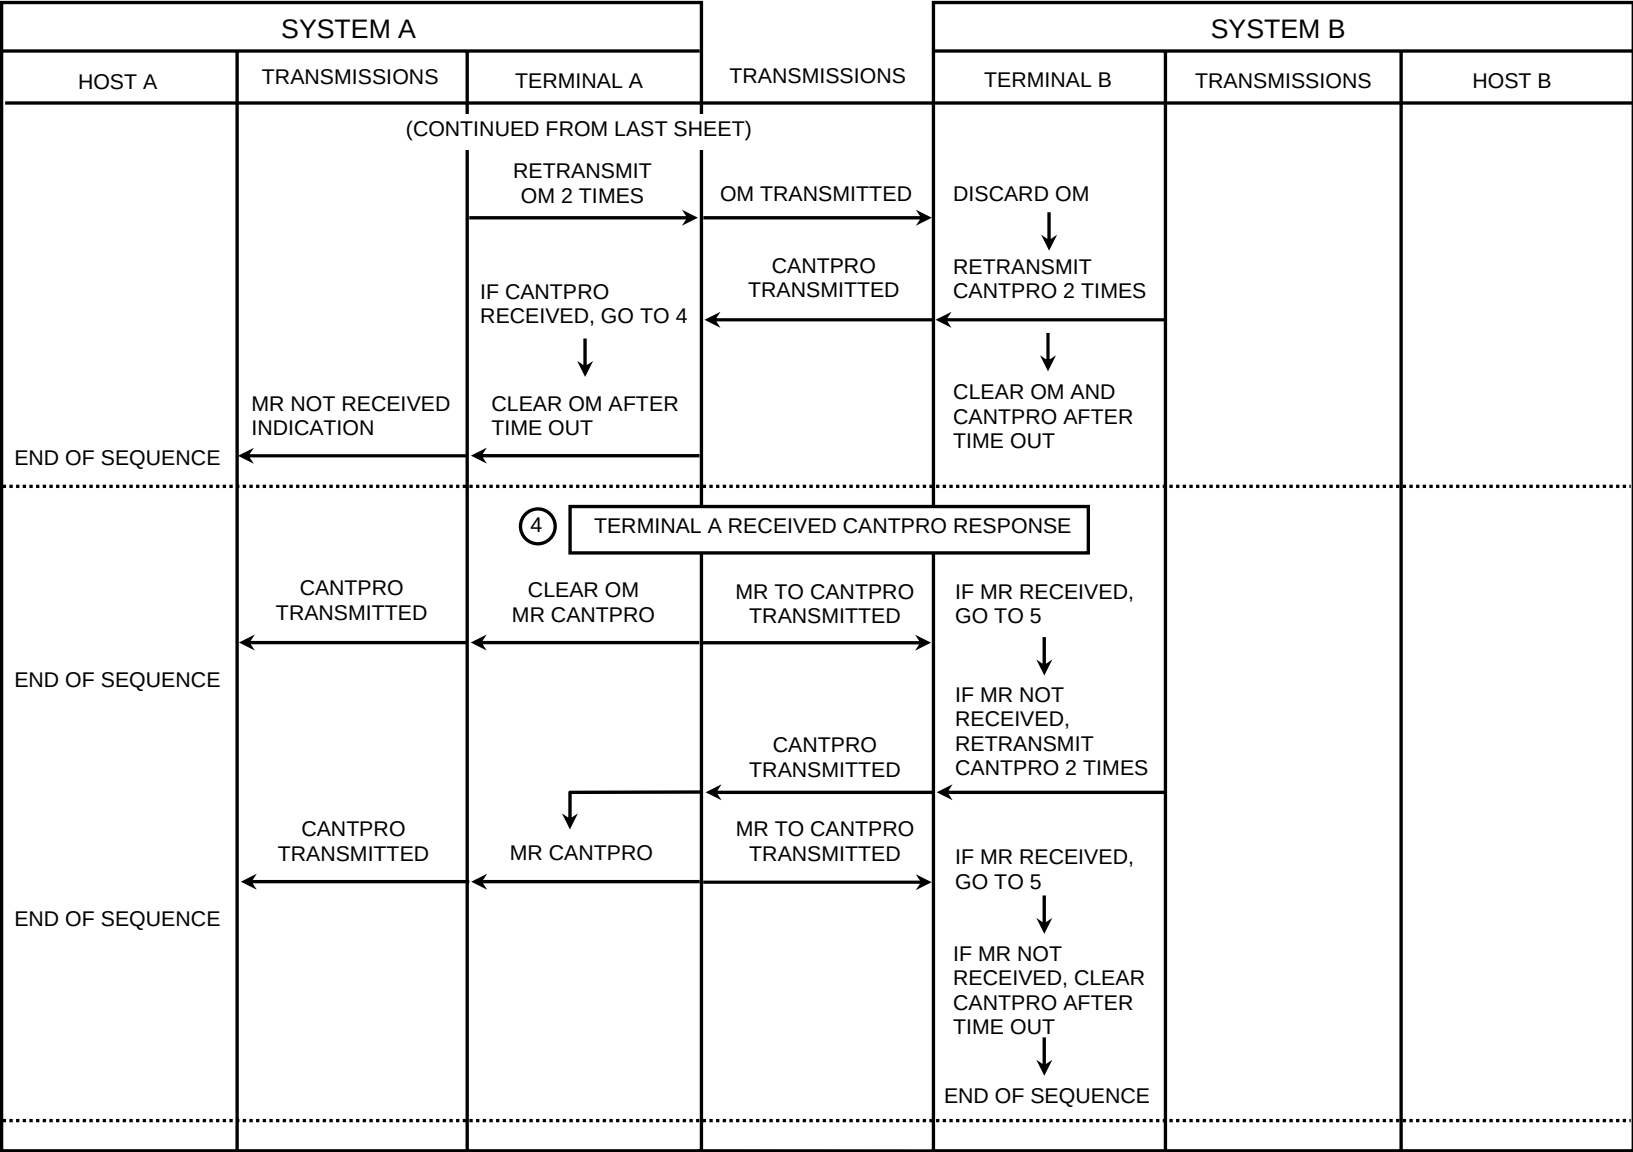

4-45

MIL-STD-6016B

TABLE 4.1-9. Message Transfer Sequence for Receipt/Compliance (Sheet 3 of 6)

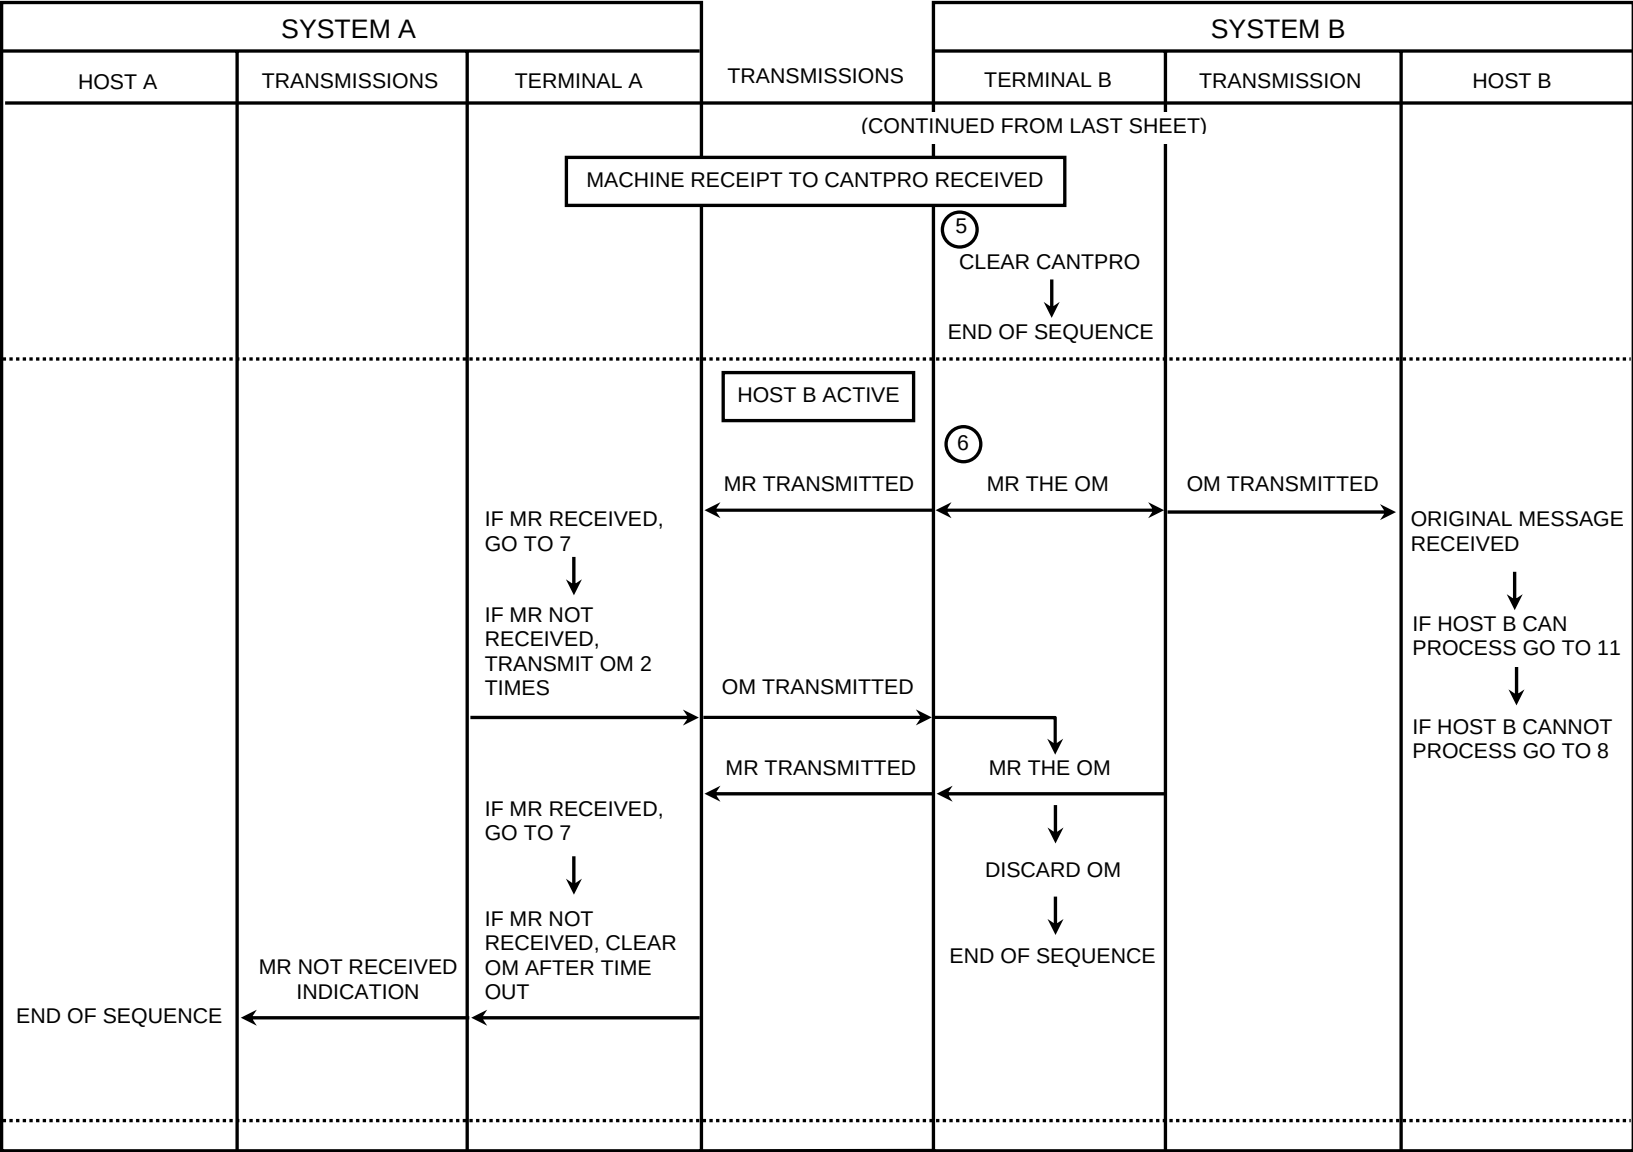


TABLE 4.1-9. Message Transfer Sequence for Receipt/Compliance (Sheet 4 of 6)


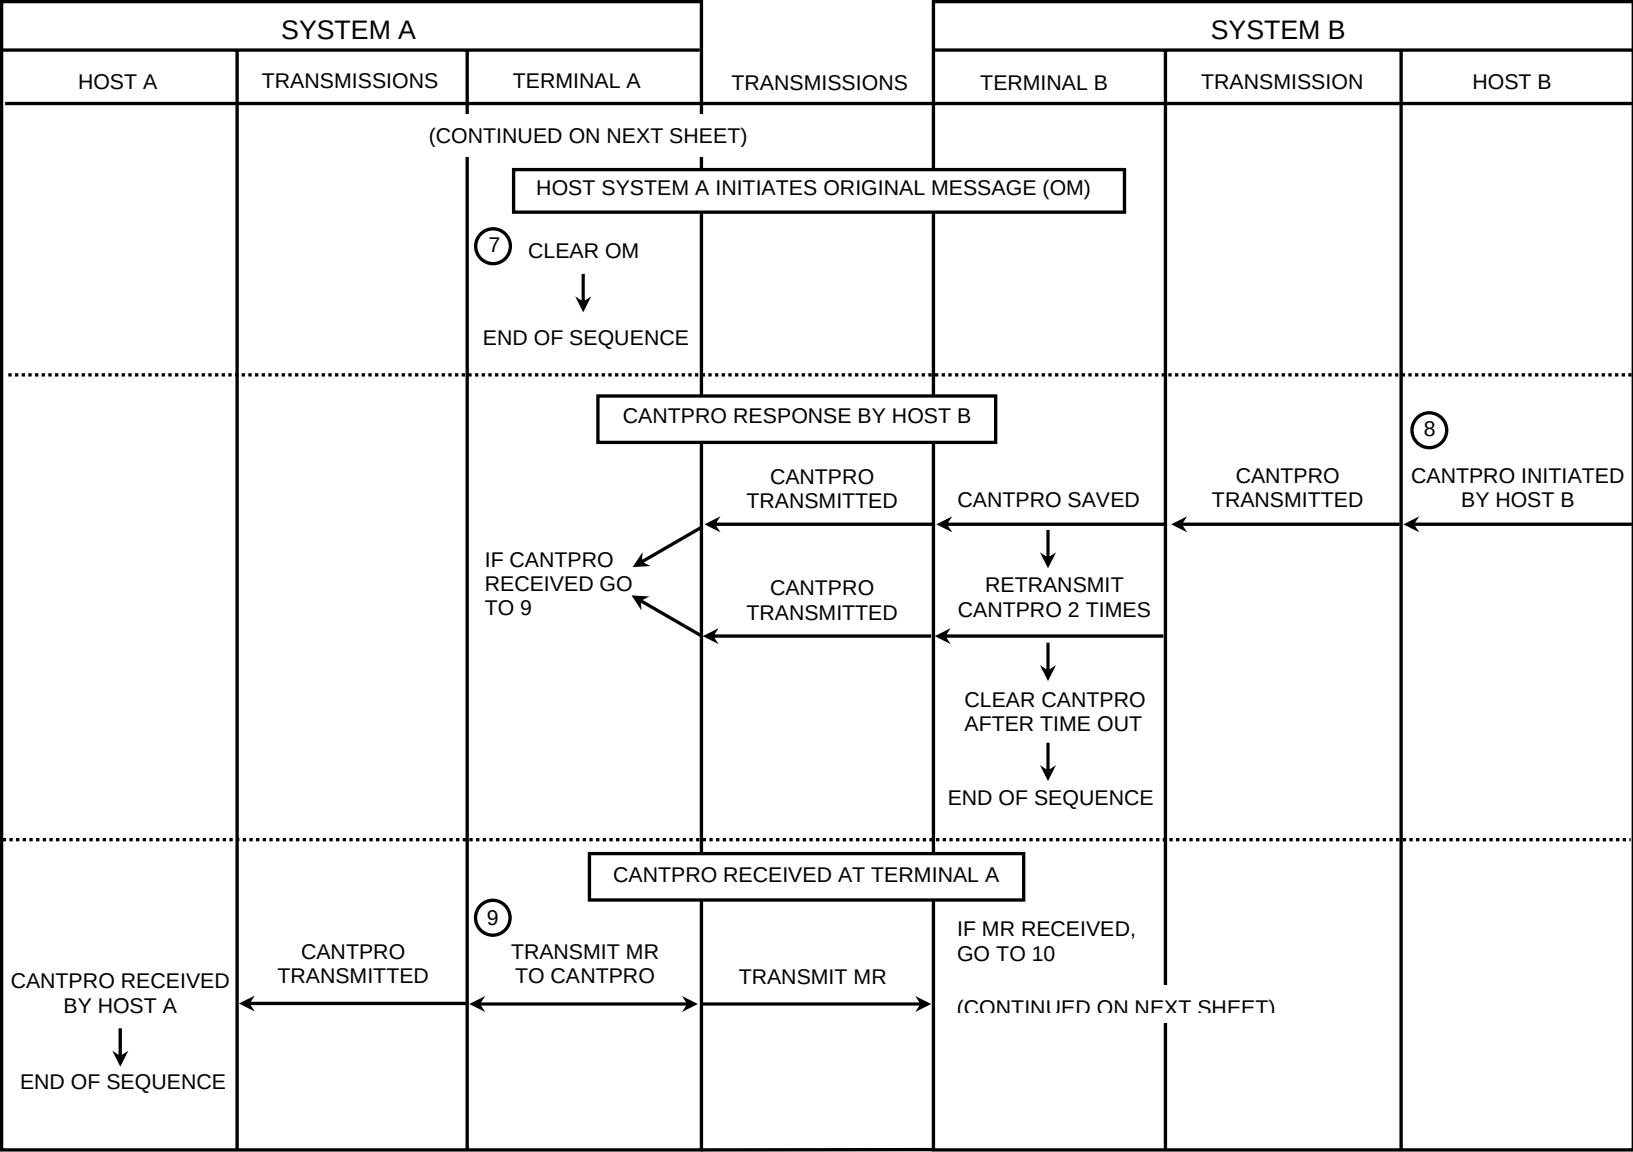


TABLE 4.1-9. Message Transfer Sequence for Receipt/Compliance (Sheet 5 of 6)

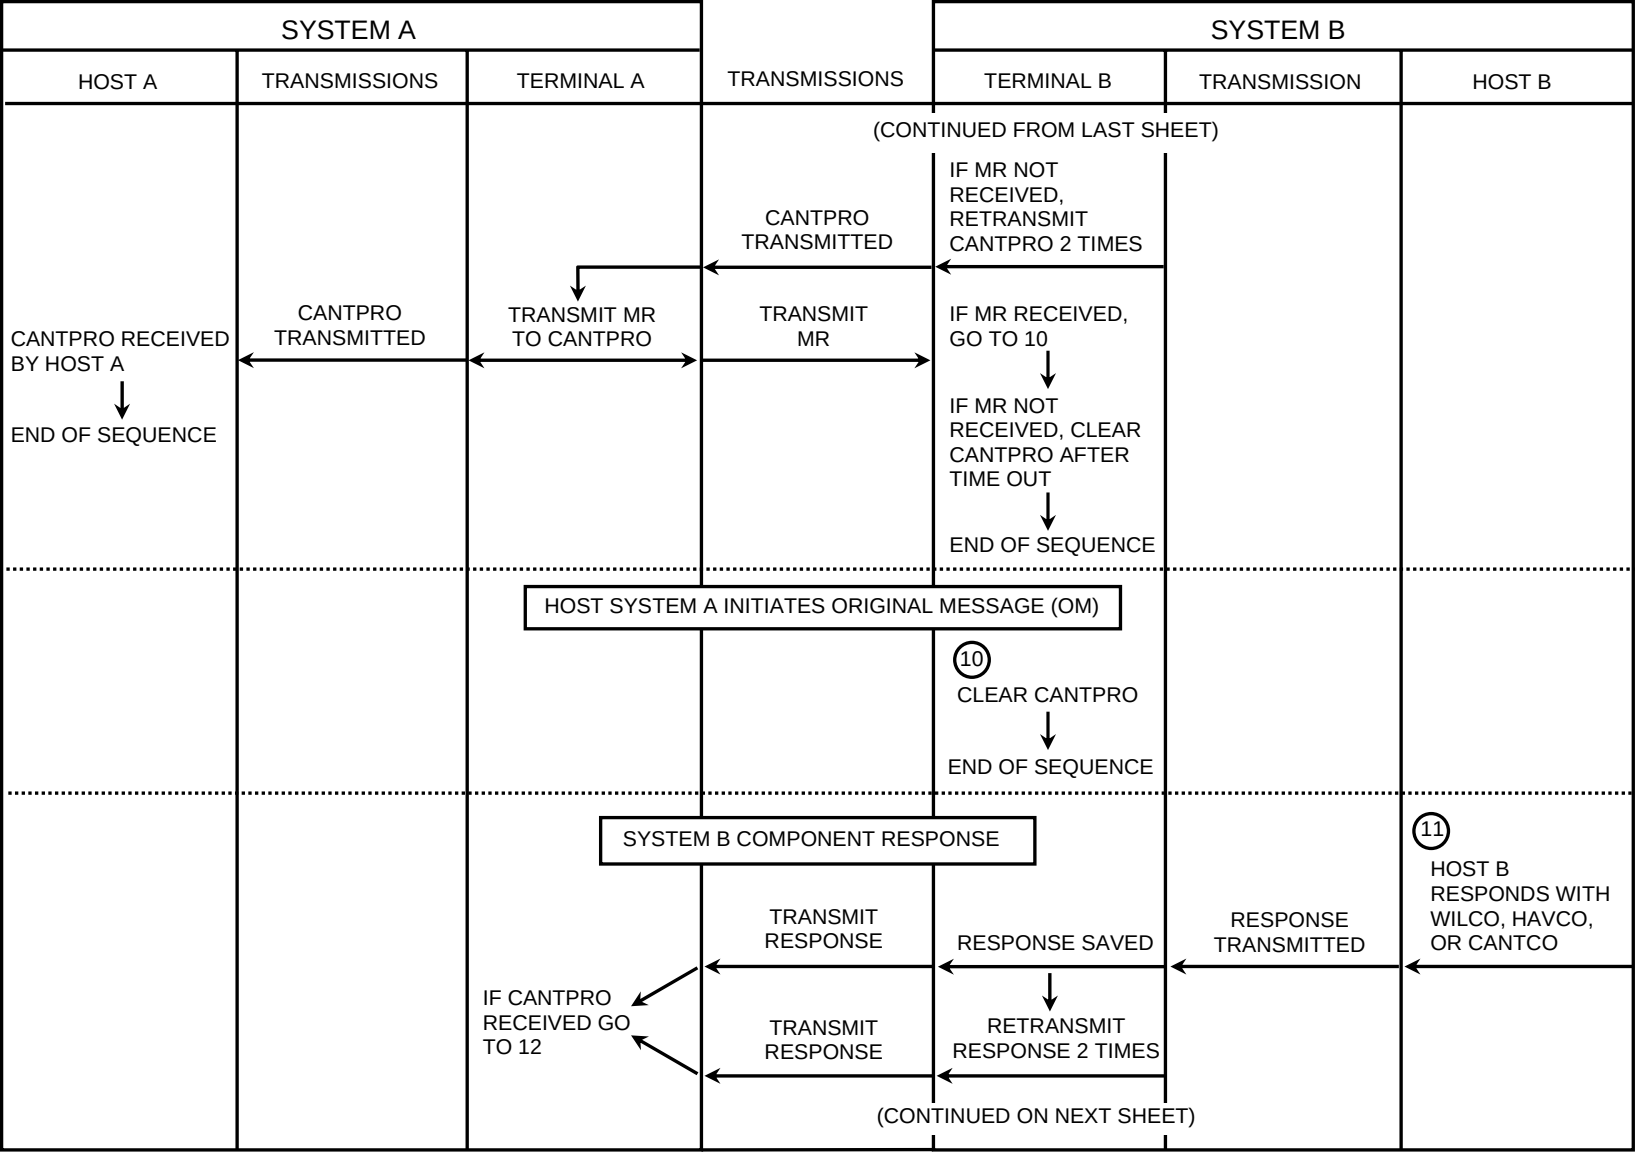

4.1.7.4 SYSTEM COMPONENT RESPONSE

System component response messages of WILCO, HAVCO, or CANTCO are normally initiated in response to OM's with the R/C field set to value 0. For HAVCO a system component may be a human or a machine. For WILCO and CANTCO the system component is a human or (unmanned vehicle only) a machine. The system component response message shall mirror the OM to which it is responding but with the following modifications:

a. The Source TN; Relayed Transmission Indicator; Addressee TN; R/C; and Recurrence Rate, Receipt/Compliance fields.

b. For message words/data fields, which shall be added/deleted when required by the individual message transmit rules.

4.1.7.5 RETRANSMISSION OF ORIGINAL MESSAGES

When an OM with the R/C field set to value 0 or value 5 is sent, a copy of the message shall be saved by the initiating terminal. When the Recurrence Rate, Receipt/Compliance field in the OM is set to the value 0, No Statement, the terminal shall automatically retransmit the OM if a machine receipt message or response message that serves as a machine receipt message is not received after 64 time slots from the transmission of the OM. The retransmission process is performed twice. When the Recurrence Rate, Receipt/Compliance field is set to a value other than 0, the terminal shall retransmit the OM if a response message is not received in the donated time slot. The retransmission process is performed twice. If a response message has not been received after the completion of either of the two conditions described, the terminal shall provide an operator alert.

An OM with the R/C field set to value 1 shall be transmitted 3 times with a Recurrence Rate Number (RRN) equal to 6 (12 seconds, 8-20 second interval) and shall not require any response message.

4.1.7.6 RETRANSMISSION OF RESPONSE MESSAGES

Response messages with the R/C field not equal to value 2 shall be saved by the terminal initiating the response message until the expected machine

receipt message is received. When the Recurrence Rate, Receipt/Compliance field is set to value 0, No Statement, the terminal shall automatically retransmit the response message if a machine receipt message is not received after 64 time slots from transmission of the OM. The retransmission process is performed twice. When the Recurrence Rate, Receipt/Compliance field is set to a value other than 0, the terminal shall retransmit the response message if a machine receipt message is not received in the donated time slot. The retransmission process is performed twice. JUs may provide an operator alert if, after the completion of this process, a machine receipt message has not been received for WILCO, HAVCO, or CANTCO response messages. For those response messages that are not operator initiated, no alert shall be generated.

4.1.7.7 RELAY OF RECEIPT/COMPLIANCE MESSAGES

A terminal functioning as an active relay shall relay messages that require receipt/compliance, but it shall not receipt messages for which it is not the addressee.

4.1.7.8 SUPPRESSION OF REDUNDANT ORIGINAL MESSAGES OR RESPONSE MESSAGES

Transmission of a redundant original message or response message may be suppressed if the addressed unit in the original or response message becomes inactive prior to completion of the redundant transmissions.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

4.2 SYSTEM INFORMATION EXCHANGE AND NETWORK MANAGEMENT

This technical function provides for the exchange of information required to establish and maintain an interface via Link 16. This information shall be exchanged via messages that enable network synchronization, timing, dynamic capacity assignments and reassignments, network control, cryptovvariable management, designation of relays, reassignment of relays and Net Control Stations (NCSs), and other actions required to ensure interoperability of the interfacing tactical data systems (TDSs).

The following discussion is divided into two parts: a general overview of the Network Management process, and detailed technical considerations and specific procedures. The general overview is presented first.

4.2.1 THE NETWORK MANAGEMENT PROCESS

The responsibilities associated with the Network Management process may be broken into three primary activities:

- a. Network Structure Design.
- b. Resource Allocation.
- c. Network Initialization and Maintenance.

These activities are described briefly in this section and are covered in greater depth beginning with paragraph 4.2.2. JUs that are equipped with appropriate facilities shall be appointed as Network Managers to perform these activities. JUs that are designated as Network Managers may be assigned all or part of the above activities (including Cryptonet Management) either for an entire network or for a subset of the network limited by the C² structure or geographic area. The personnel and equipment needed for a facility to support Network Management will depend both on the activities to be performed and on the size, complexity, and dynamics of the network. The degree of automation required for Network Management will also depend on these factors.

Cryptonet Management is required to minimize the exposure of sensitive operational information; access should be based on risk and need-to-know. Risk and need-to-know are the factors used to limit the adverse impact on operations of a known or unknown compromise and to facilitate actions to recover from a known compromise. Compromise of a network's information can result from theft or capture of a network's cryptovvariable(s). Cryptonet Managers can limit operational impact from a known or unknown compromise by assigning separate cryptovvariables to Participation Groups (PGs) based on their need-to-know and the risk of compromise of the data transferred within the PG.

4.2.1.1.1 NETWORK STRUCTURE DESIGN

In configuring a Link 16 network, the first step is to establish a skeletal structure for the network based on the community's communications and communications security requirements. This process involves determining communities of interest, i.e., Participation Groups, for each information exchange category and establishing connectivity within these communities.

4.2.1.1.1.1 PARTICIPATION GROUPS

The Time Division Multiple Access (TDMA) network structure is organized around Participation Groups made up of Network PGs and Needline PGs (described in paragraph 4.2.3.1). A Network Manager responsible for configuring the network structure shall first establish a set of Participation Group Communities (PGCs) fitting the communications requirements of the general community for which he has responsibility. To do so, the Network Manager must be informed as to the message types to be exchanged by JUs in the general community, the communications security requirements, and the sources and destinations (specific or general) associated with each message type.

The communications security requirements of a PGC define the allowable message security connectivity for the PGC. The security requirements of all PGCs dictate to the Network Manager which PGCs can belong to the same cryptonet. A cryptonet is the set of all JUs holding the same cryptovvariable for message security. In the JTIDS/MIDS system, messages can be transmitted

in one of two security modes, the Common Variable mode or the Partitioned Variable mode.

4.2.1.1.2 SECURITY MODES

The JTIDS/MIDS system provides both transmission security (TRANSEC) and message security (MSEC). In the Common Variable mode there is one cryptovariable used for both TRANSEC and MSEC. In the Partitioned Variable mode there are two cryptovariables, one for TRANSEC and one for MSEC. Each JTIDS/MIDS net is defined by a net number and a TRANSEC cryptovariable. Each time slot assignment on a net can be designated to operate in the Common Variable or Partitioned Variable mode. In the Common Variable mode all net members can receive and read the messages transmitted, thereby operating as a single cryptonet. In the Partitioned Variable mode the nets can be divided into multiple cryptonets using different MSEC variables. In order to receive and read the messages transmitted, a JU must be a net member and a cryptonet member. However, in the Partitioned Variable mode any net member can relay any J-Series message even though the net member does not hold the same MSEC variable.

4.2.1.1.3 MULTINETTING AND STACKED NETS

When the PGCs have been established, sets of PGCs that are suitable for multinetting or stacked netting shall be identified to allow for multinet operations without loss of operationally required connectivity if multinet operation is necessitated by capacity demands (See paragraph 4.2.4.1.1.). A set of PGs may be multinetted if their associated PGCs have no JUs in common. A set of PGs may be stacked if their associated PGCs have no JUs in common, and their capacity requirements are identical.

4.2.1.1.4 RELAY

Once the PGCs are established, measures shall be taken to provide for connectivity among the JUs in each PGC. Because of line of sight (LOS) limitations or enemy jamming, some JUs may not be able to communicate directly with other JUs in their PGC. Where direct links between all JUs in a PGC do not exist or are unreliable, connectivity shall be established

through the use of relays. JUs that are suitably located during the course of their normal operations shall serve as relays of opportunity.

A JU designated to relay a message shall be provided with capacity in which to transmit the relayed message. Three relay modes are available: Paired Slot Relay mode, Repromulgation Relay mode, and Addressed Relay mode. Relay assignments can be Unconditional or Conditional. An Unconditional Relay is activated upon assignment. A Conditional Relay is activated and deactivated automatically as a terminal function based on the location and relative distance of the JU from other active relays.

a. Paired Slot Relay Mode. In the Paired Slot Relay mode, any message received in a given time slot block X shall be relayed in the next occurring time slot of an associated time slot block Y. Multiple sets of paired time slots may be strung together to handle multihop relays. However, the use of relays, particularly multihop paired slot relays, is very costly in terms of system capacity. Single-hop paired slot relay requires twice the time slots needed for the original transmissions. More generally, N-hop Paired Slot Relay increases the time slot requirement by a factor of N plus 1. Paired Slot Relay assignments may be either Conditional or Unconditional.

b. Repromulgation Relay Mode. The Repromulgation Relay mode is an alternative relay mode designed to conserve capacity in a multihop relay environment. It is also designed to provide a way of distributing information in a multihop relay environment without depending on a terminal knowing direct or indirect connectivity, relay address, or externally supplied routing information. Thus, it is a distributed capability that does not depend on a central control function for its normal operation. It is suited to communications where a high throughput rate must be sustained or where messages have multiple destinations. Repromulgation Relay assignments are Unconditional only.

Using the Repromulgation Relay mode, relay time slots are donated from the originating JU's time slot block. A message designated for the Repromulgation Relay mode must be preceded by a Repromulgation Relay message which must be the first message in the time slot. The Repromulgation Relay message will specify the number of times the message should be relayed and the exact delay between the receipt of the message and the relay

transmission. This delay corresponds to the Recurrence Rate of the time slot block (or subblock) in which the message originated. The originating JU may transmit its next message in the third slot of the time slot block following the previous transmission.

When the time slot requirements are driven by a throughput requirement, the Repromulgation Relay mode increases the time slot requirement at most by a factor of three, regardless of the number of relay hops required. The main drawback of this technique is that the first word of each message is required as overhead.

c. Addressed Relay Mode. The Addressed Relay mode can be used where multihops are required to achieve the desired physical and functional connectivity. Terminals participating in communications according to specific needlines must be controllable not only by relay time slot assignments and Repromulgation Counters, but also by addressing techniques. The Addressed Relay mode involves transmitting the information in a time slot along an established route that is specified in the first message in the time slot. Addressed Relay mode assignments are Unconditional only.

4.2.1.2 RESOURCE ALLOCATION

While a JTIDS/MIDS network has a large capacity for the exchange of tactical information, especially when formatted messages are transmitted, the total capacity of a single net is finite.

One net has a total usable capacity of 98,304 time slots during each 12.8 minute epoch. There are 128 assignable net numbers. Each net number can be associated with any available TRANSEC cryptovvariable. Each net is characterized by a net number and a TRANSEC cryptovvariable. However, approximately 15 to 20 of these nets can operate at the same time in geographic proximity without excessive mutual interference. Each time slot block assignment on a net can be operated in the Common or Partitioned Variable mode. In the Common Variable mode the net TRANSEC variable is also used for MSEC. In the Partitioned Variable mode, a separate variable (MSEC variable) is used for MSEC.

The primary task of the Network Manager is to allocate the total network capacity within communications security guidelines among users who have information to exchange. If the number of users is small, the task of capacity and cryptovvariable allocation is relatively simple. With a large number of users, the task becomes more complex because user demands quickly reduce the remaining, available network capacity. Therefore, the Network Manager needs to know how many participants there will be and their security requirements so this information can be factored into the Network Management scheme.

The task of the Cryptonet Manager is to provide sound Cryptonet Management practices by:

- a. Establishing procedures that are consistent with established Communications Security (COMSEC) doctrine to minimize the exposure of sensitive operational information.
- b. Establishing procedures that provide for the most effective and secure use of the finite number of cryptovvariables that are available.
- c. Establishing procedures that establish and maintain a relationship of cryptovvariables to cryptovvariable logical labels by using the short titles.
- d. Establishing procedures that provide effective methods of recovery from a security compromise that has resulted from a loss of a cryptovvariable such as a keyed terminal or a cryptovvariable device.
- e. Establishing a method of dynamically rekeying JTIDS/MIDS terminals after loss, suspected loss, or a change of cryptovvariables due to operational considerations.
- f. Providing for the partitioning of available information into separate cryptonets based on the operational need-to-know and risk.

The specific resource allocation is highly dependent on the operational situation, the proximity of one JU to another, and the flexibility of sectioning various information exchanges into mutually exclusive groups. For

example, in situations involving the exchange of Land (Ground) and Subsurface (Maritime) Surveillance messages, these two functions are definable as two multinetted PGs. In some operational situations, however, Surface (Maritime) forces may have to operate close to shore, making them vulnerable to attack by mobile artillery as well as submarines. In this situation, Surface (Maritime) forces will require access to Land (Ground) and Subsurface (Maritime) Surveillance messages.

4.2.1.2.1 ACCESS MODES

When the PGCs and their associated relay requirements have been determined, system capacity for the corresponding PG must be allocated to meet the established requirements. First, a preliminary choice of the access mode to be used must be made. The choices available include Dedicated Access mode, Contention Access mode, Time Slot Reallocation (TSR) Access mode, and Call-Up Access mode.

a. Dedicated Access Mode. The Dedicated Access mode is the assignment of specific time slots to specific JUs within a PGC. JUs have unlimited access to their assigned time slots within the PG. The Dedicated Access mode has the advantage of guaranteeing that a JU has time slots available for transmissions and that receiving JUs have no message conflict on a time slot. However, this access mode wastes capacity if message traffic is bursty, since only a small subset of the assigned time slots may actually be used for transmissions.

b. Contention Access Mode. The Contention Access mode allows JUs in a PGC to compete for the available capacity of the PG by pseudorandomly choosing transmission time slots from a common pool according to the requirements of each JU. This method conserves capacity, especially when message traffic is bursty or is driven by response time. However, this method decreases the probability that any given message will reach its intended destination(s) due to the possibility that more than one JU within LOS of the receiver may choose to transmit in the same time slot.

c. Time Slot Reallocation Access Mode. The Time Slot Reallocation Access mode allows JUs in a PGC to reallocate a shared pool of time slots periodically so that each JU assigns itself time slots according to its

expected demand and the announced demands of other JUs. The shared pool of time slots assigned to and shared by a number of JUs for exchanging messages in a particular PGC is known as the reallocation pool. If the aggregate JU demand for time slots exceeds the capacity of the reallocation pool, the JUs assign themselves time slots in proportion to their demands, but scaled down by a common factor so that the total allocation is within the reallocation pool capacity.

This access mode conserves capacity by allowing the reallocation pool to be sized according to the expected aggregate requirement rather than as the sum of the peak capacity requirements of all participating JUs. The reallocation period can be set to the expected rate of demand fluctuations with a minimum reallocation period of 6 seconds and a maximum reallocation period of 48 seconds. The access mode is designed to operate in conditions of poor connectivity and overload, and in these conditions it will result in graceful degradation in the probability of successful message transmission in the case of time slot conflicts and subsequent reception in the case of jamming. This access mode is suitable for use in an environment where the available capacity is to be shared by a varying community of users with fluctuating demands.

The first J0.7 message sent by a JU that enters a TSR Pool must occur in a TSR Initial Entry Access time slot, if there is no dedicated access time slot assignment for the PG.

d. Call-Up Access Mode. In the Call-Up Access mode, the allocation of transmission time slots within the PG is dynamically controlled through the use of J0.6 Communications Control messages. After receipt of a J0.6 message, the interrogated JU transmits in all of the subsequent time slots of the PG until the message queue for that PG is exhausted or until the JU reaches the designated transmission limit, at which time another JU is interrogated. Interrogations may be made by a centralized control (Roll Call mode) or by successive terminals at the end of their own transmissions (Round Robin mode).

4.2.1.2.2 CALCULATION OF PARTICIPATION GROUP TIME SLOT REQUIREMENTS

When an access mode (or modes) for a PGC has been selected, the capacity requirements for the PG may be calculated. Time slot requirements are primarily determined by the transmit time slot requirements of the individual JUs in the PGC, the number of JUs in the PGC, their relative locations, the chosen access mode(s), the relay requirements, and the chosen acknowledgement protocol.

The transmit time slot requirement of a JU is equal to either the throughput requirement (the number of time slots each epoch required to support the JU's throughput requirements for original transmissions, relay transmissions, and acknowledgements) or the response time requirement (the number of time slots each epoch required to provide the specified response time for messages to be transmitted by the JU in that PG), whichever number is greater.

For the Dedicated Access mode, the PG time slot requirement is equal to the sum of the transmit time slot requirements of the individual JUs in the PGC. For the Contention Access mode, the time slot requirement is a function of the JU's transmit time slot requirements, the density of the JUs, and the required message reception probability by specific receivers. For the Time Slot Reallocation Access mode, the time slot requirement is equal to the maximum combined requirement of the PGC including an allowance for the transmission of J0.7 messages and the Time Slot Reallocation initial entry time slot requirements which are a function of the required time for a JU to begin participation in the reallocation pool and the number of JUs that may be expected to attempt to enter a Time Slot Reallocation pool simultaneously. For the Call-Up Access mode, the PG time slot requirement is the sum of the average throughput time slot requirements of the JUs in the PGC plus the number of time slots required for overhead.

4.2.1.2.3 ASSIGNMENT OF TIME SLOT BLOCKS

Once the time slot requirements for all PGs have been computed, the Network Manager may begin to allocate the system capacity. The first step in this process is to determine the time slot block requests for each PG. Since JTIDS/MIDS terminals are assigned time slot blocks of size 2^N ($0 \leq N \leq 15$) per epoch, and since any single JU

can accept only a limited number of block assignments, it may not be possible to match the exact number of time slots allocated to the PG's actual requirements. Therefore, it may be necessary to round off the time slot requests of some PGs. When time slot block requests have been determined for each PG, the Network Manager must assign specific time slot blocks in accordance with these requests.

4.2.1.2.4 METHODS TO REDUCE RESOURCE UTILIZATION

When JTIDS/MIDS is fully deployed, capacity requirements may exceed the available terminal, network or system capacities. When the sum of the time slot block requests for all PGs exceeds the capacity of one net, multinetting and stacking of PGs may be employed by the network/system manager to increase available capacity. If multinetting and stacking do not provide enough additional capacity to meet the demand, the Network Manager has several other options available to reduce the time slot block allocations to the various PGs. For a specific PG, methods for reducing capacity requirements include:

- a. Time slot reuse (assigning the same time slots to more than one JU in the PG).
- b. Changing the access mode.
- c. Using Packed-2 messages.
- d. Reducing the number of relay hops.

Any of these methods may reduce the message reception probability and thus must be used with caution. In some cases, it may be preferable to reduce capacity demands by easing performance requirements, e.g., by lessening response time requirements.

4.2.1.3 NETWORK INITIALIZATION AND MAINTENANCE

The following paragraphs describe the procedures for network initialization and maintenance.

4.2.1.3.1 DYNAMIC VERSUS STATIC NETWORK MANAGEMENT

To achieve a maximum degree of nodelessness, a JTIDS/MIDS network should operate with minimal intervention from Network Managers. To the maximum extent possible, Network Management should be carried out in advance of operations. Advance preparations can include determination of the PGCs, nets, cryptonets, capacity allocations, access modes, mission channel assignments, Net Time Reference (NTR), and Initial Entry JTIDS Unit (IEJU) assignments. Network Management performed without real-time intervention of a Network Manager is referred to as Static Network Management.

Dynamic Network Management denotes real-time or nearly real-time management of the network by a Network Manager or Managers. Typically, Dynamic Network Management is executed by transmitting commands, via JTIDS/MIDS, using J0 System Information Exchange and Network Management messages. Dynamic Network Management allows a rapid adjustment of the network to changing circumstances, but it has the disadvantage of creating communications nodes and increasing the opportunity for error. Some degree of Dynamic Network Management will probably be necessary as part of network initialization and maintenance activities.

4.2.1.3.2 NETWORK INITIALIZATION AND NET ENTRY

Network initialization activities include the establishment of time synchronization among all JUs in the network and the communication of network capacity assignments and relay assignments to participating JUs. Time synchronization within a net is accomplished as follows:

a. Time Synchronization. One JU is assigned as the Network Time Reference (NTR) to establish system time. The NTR begins transmitting in a designated set of time slots known as the Net Entry time slots. Other JUs then join the network as operationally required by synchronizing directly or indirectly with the NTR. This process is known as network entry.

b. JTIDS/MIDS Network Entry. JTIDS/MIDS Network Entry is achieved in two steps: Coarse Synchronization and Fine Synchronization. The process begins with the operator entering into the terminal an estimate of system

time and a corresponding time uncertainty. After this, Network Entry is an automatic terminal function.

The terminal begins listening for a message in the Net Entry time slots. When one error-free message signal has been received, the terminal achieves a state of Coarse Synchronization. At this time, it is capable of receiving messages, but it is not permitted to transmit any message except the Round-Trip-Timing (RTT) Interrogation.

Fine Synchronization is achieved by further improving the JU's estimate of system time. This may be accomplished either in the Active mode (exchanging an RTT Interrogation/Reply with a JU already in the network, i.e., already synchronized to the NTR) or in the Passive mode (using J2 PPLI messages received from JUs in the network). Active main net relays, and IEJUs will also broadcast in the Net Entry time slots to support the entry of JUs that are not within LOS of the NTR.

Network capacity assignments and relay assignments may be entered into the terminal either manually by the operator or automatically via Link 16 messages. Preferably, network capacity assignments shall be issued to the JUs prior to their entry into the network. However, the J0.0 Initial Entry message shall contain the time slot assignments for certain Network PGs.

4.2.1.3.3 NETWORK MAINTENANCE

Network maintenance activity includes the preservation of synchronization, connectivity, communications security and network capacity assignments appropriate to the communications requirements of the network participants. The activities associated with network maintenance include:

- a. The assignment of a replacement NTR if the current NTR fails or is destroyed.
- b. The assignment of replacement and/or additional IEJUs.
- c. The assignment and cancellation of relay responsibilities to meet current connectivity requirements.

d. The assignment and cancellation of network capacity allocations to meet current communications requirements.

e. The updating of the Network Management database and the reassignment of network capacity as subscribers enter and exit the network.

f. The distribution and management of cryptovariables to meet communications requirements and communications security requirements.

4.2.2 PLANNING AND EXECUTING NETWORK MANAGEMENT

Two phases of Network Management must receive attention before and during tactical operations. The phases are:

a. Planning for Network Management.

b. Executing Network Management.

Detailed discussions of each topic are presented in the sections that follow.

4.2.2.1 PLANNING FOR NETWORK MANAGEMENT

Two phases of planning for Network Management can be identified:

a. Planning Network Management facilities.

b. Planning Network Management for subscribers.

4.2.2.1.1 PLANNING NETWORK MANAGEMENT FACILITIES

This phase of preparation involves the acquisition of equipment and the training of people capable of performing Network Management. These resources are located at appropriate operational and organizational facilities. A Network Management facility is required to support a Network Manager's activities. Network Managers engaged in Dynamic Network Management must have access to the JTIDS/MIDS network through JTIDS/MIDS terminals collocated with the Network Management facility. Thus, such facilities must also be JUs.

When there is more than one Network Management facility in a given network, the Network Managers are hierarchically organized. Each Network Manager performs Network Management for a segment of the network capacity. If the active Network Manager's facility suffers catastrophic failure, a designated backup facility will assume the Network Management function. If the Joint Operational Commander (JOC) decides to use one of the Service's facilities as the joint Network Manager (such as U.S. Air Force Tactical Air Control Center (TACC)/Message Processing Center (MPC), U.S. Marine Corps C² Unit, U.S. Army NCS, or U.S. Navy C² Unit), this facility is expected to provide its own backup facility. This implies prioritized, designated backup Network Managers who monitor the activity of the active Network Manager and store an essentially duplicate database to enable the priority backup Network Manager to assume Network Management functions with minimum delay. Real-time communications connectivity between active Network Managers and backup Network Managers can be through JTIDS/MIDS or other conventional means.

4.2.2.1.2 PLANNING NETWORK MANAGEMENT FOR SUBSCRIBERS

This phase of planning involves the initialization and maintenance of the network database with required data on subscribers. This database should include a list of subscribers and potential subscribers whose network capacity assignments must be managed, a compilation of cryptovariables and their associated cryptovariable logical labels available for use by these subscribers, and any capacity constraints imposed by the need to partition the network capacity among joint and individual service applications. In addition, for each subscriber, the database should include the type of unit and its mobility, approximate location, permanence in that location, and communications requirements. Communications data includes items such as PGs, message types and associated response times, throughput/update rates, and rate matching. Other needed parameters characterize the terminal's capability to support relay modes such as the Paired Slot Relay mode, the Repromulgation Relay mode, and the Addressed Relay mode.

This database should exist with appropriate backup provisions. It should be maintained on a continuous basis, and it should be updated as soon as terminals are designated for a particular operational facility. Contingency plans, communications plans, and operations plans should include this type of

information as far in advance as possible to ease the initial burden on Network Managers.

4.2.2.2 EXECUTING NETWORK MANAGEMENT

In the execution phase, Network Management functions are performed by both Network Manager JUs and subscriber JUs. Thus, two types of Network Management functions should be considered:

- a. Network Management functions executed at the Network Management facilities.
- b. Network Management support functions executed by the subscribers (including relays).

4.2.2.2.1 FUNCTIONS EXECUTED AT THE NETWORK MANAGEMENT FACILITIES

These facilities carry out unique Network Management tasks that cannot be performed by other subscribers. These tasks can include making NTR and IEJU assignments, the partitioning of available capacity into PGs, the distribution and/or assignment of cryptovariables, the determination of the need for relays and the designation of relay terminals. A Network Manager shall also dynamically respond to changes in subscriber participation, communications security, and relay requirements during the course of an operation. Appropriate Network Management messages shall be generated to implement the required changes.

4.2.2.2.2 FUNCTIONS EXECUTED BY THE SUBSCRIBERS

Network Management support includes Network Management tasks that can be performed by subscriber JTIDS/MIDS terminals that are not necessarily network managers. A JTIDS/MIDS terminal can declare itself NTR, synchronize with an already existing NTR, enter the network to a full participation status, exit the network, accept relay instructions and network capacity assignment instructions, abide by the protocols of the various access modes, and contribute to relaying based on the Conditional Relay Algorithm.

4.2.3 ESTABLISHMENT OF PARTICIPATION GROUPS

The establishment of PGs shall be a responsibility of the Network Manager. This establishment of PGs is the first step in a multistep process of time slot management which consists of allocating the available JTIDS/MIDS capacity to a given set or type of subscribers. The two categories of PGs are:

- a. Network PGs.
- b. Needline PGs.

Within each category of PG, there may be numerous specific PGs. Each subscriber may participate in either or both PG categories, but a subscriber is limited by terminal implementation on the exact number of PGs in which he may participate.

4.2.3.1 NETWORK PARTICIPATION GROUPS AND NEEDLINE PARTICIPATION GROUPS

A Network PG is characterized by a list of applicable messages used to support an agreed upon technical function without regard to subscriber identities. A Needline PG is characterized by a list of netted subscribers compiled without regard to the specific messages they exchange with each other.

JTIDS/MIDS network capacity must first be allocated among Network PGs based on the combined needs of the users, the priority of those needs, and the characteristics of the JTIDS/MIDS technical functions. This allocation shall be relatively fixed; it is based on the general need to maintain network operation and essential connectivity. The remainder of the allocation shall be flexible to permit adaptation to changing operational needs and various levels of network loading. This scheme provides for a single net and cryptonet in situations demanding total interoperability. It also provides for multinet, multiple cryptonets, and stacked nets where the network loading, security, and functional, mission, or tactical operation connectivity requirements make such network organization desirable.

After an initial portion of the JTIDS/MIDS network capacity is allocated to required joint Network PGs, the remaining capacity can be allocated among Service-unique Network PGs or Needline PGs. A Needline PG is characterized by the following parameters: source user military identification, destination user military identification, bits per message, number of messages each peak period, end-to-end response time, and the needline priority with respect to the source.

The capacity associated with a Needline PG is that required to support a needline from a single source to one or more destinations which are to receive the same messages.

As mentioned above, the distinction between a Network PG and a Needline PG is that Network PGs allow transmission of specific message labels and sub-labels by/to any subscriber, and Needline PGs allow transmission of any message labels and sublabels by/to a specific set of subscribers. By assignment of time slots, the Network Manager may establish a Network PG which allows transmission of specific message labels and sublabels by/to a specific set of subscribers.

The specific PGs to be established are determined by the participants in the various communities of interest that exist among participants, minimum implementation requirements, response time and throughput requirements for each message label or needline, and allowed access modes and other information exchange requirements (See paragraph 4.2.3.10). These technical considerations are described in the following paragraphs.

Joint Network PGs that have been defined for Link 16 are described in paragraph 4.2.3.10. No joint Needline PGs have been identified; however, the U.S. Army has defined numerous Needline PGs for intra-Service use.

Once PGs are established, they must be supported by the subscribers. A JU must organize and execute its transmissions according to the PG assignments made to it. The PG assignments may be predefined in the terminal database, be preloaded into the terminal as initialization input, vary dynamically through control inputs received during terminal operation via the host platform, or they may vary dynamically by radioed Network Management messages. Since the Link 16 time slot assignment messages cannot associate

specific PG numbers with message labels and sublabels which characterize the PG, this correspondence must be previously agreed upon. Similarly, with Needline PGs, a Needline PG number must be preassigned during initialization or by operations order to associate a source JU with allowed destination JUs.

The rudimentary assignments necessary for subscriber network entry, position location, and Network Management support functions must be known and initialized as described herein.

4.2.3.2 INFORMATION EXCHANGE REQUIREMENTS

Information exchange requirements are determined from the mission of the subscribers. Only a subset of these requirements need be given to the Network Manager as an input to the Network Management database. The parameters of the information exchange requirements may vary from user to user. To avoid confusion and misinterpretation of these parameters, the Network Manager may establish a standard set of parameters which he shall accept from subscribers. Operational requirements may dictate the use of nonstandard parameters. The following parameters are most useful to the Network Manager:

- a. PG types.
- b. Labels and sublabels of messages per PG type.
- c. Length of messages, in bits.
- d. Number of messages per unit time per label/sublabel per PG type.
- e. End-to-end response time per message label/sublabel per PG.
- f. The connectivity requirements of the PGCs using each PG type.
- g. Security requirements of the PGCs using each PG type.

If the PG types are not specified by the potential subscriber or his proponent, the Network Manager shall use the JTIDS TIDP for guidance. This document provides a set of Network PGs that have been agreed upon jointly.

Message labels and sublabels are defined for each Link 16 message, and terminal's response times and update rates are given along with T/R rules to facilitate the derivation of required throughput and end-to-end response times. If the message labels and sublabels do not match the guidance outlined herein, the Network Manager must determine the PG categories and types within categories based upon the given subscriber's missions and other subscribers associated with his missions. The Network Manager shall align the throughput/response time requirements to minimize the total network capacity utilization.

Most of the data needed to make capacity estimates are available in the form of force structure, intelligence estimates, and other operational planning information. Once the gross capacity estimates have been made for each Network PG, they should be refined into maximum, average, and minimum loading estimates. Based on these estimates and communications security requirements, determinations can be made regarding such functions as access mode, time slot reuse, multiple cryptonetting, multinetting, and stacked netting. The specific arrangement will be somewhat dependent on the operational situation and the feasibility of partitioning various information exchange requirements into PGCs.

4.2.3.3 MINIMUM IMPLEMENTATION

Minimum implementation requirements are defined in Appendix A to this volume. Of importance to the task of Network Management is the fact that Link 16 participation requires that specific technical functions be implemented by all JUs on the network. The requirements of minimum implementation will, by necessity, use a portion of the total JTIDS/MIDS network capacity.

4.2.3.4 RESPONSE TIME

JTIDS/MIDS capacity assignments may be driven by response time requirements. Response time is a term used to characterize delay performance of a system given a set of inputs or stimuli. Response time is therefore dependent on the specific messages entering the system and the "extent of the system." The "extent of the system" may include the JU, or may encompass the originator and recipient (end-to-end process) including both people and equipment. Response times are defined below:

a. JU Response Time. The time from new information availability at the JU to the transmission of the information on the link. This time is defined for each message in Table 4.1-3.

b. Terminal Response Time. The time from new information availability at the terminal to the transmission of the information on the link. The JU Response Time is made up of the Terminal Response Time and the platform system response time. For purposes of platform system implementation, the Terminal Response Time begins when the data are available at the output interface of the platform system and ends when the message signal has been emitted on the source antenna. This time can be divided into necessary processing time and time to availability of the next transmission time slot. The necessary processing time is 100 msec (approximately 13 time slots). The time to the availability of the next transmission time slot is a function of Network Management decisions. The access rate and access mode are principal determining factors.

c. End-to-End Response Time. The time from new information availability at the source JU to the reception of the message at the destination JU.

In terms of operational requirements, the End-to-End Response Time is the item of concern. This response time is made up of the JU Response Time and the transmission time. Transmission time varies with the transmission path which, to the extent it is controllable, depends on Network Management decisions. The number of relays and the offset delay at each relay unit are the principal determining factors.

The Network Manager must consider the delays resulting from access rate, access mode, and relay delay in arriving at an End-to-End Response Time that is operationally acceptable. The Network Manager uses Terminal Response Time to estimate the time slot capacity (time slots per second) needed to meet End-to-End Response Time requirements.

4.2.3.5 THROUGHPUT

Assignment of the JTIDS/MIDS network capacity may be driven by throughput requirements. Throughput is a general term used to characterize the load

performance of a system, given a set of inputs or stimuli. Throughput requirements are therefore dependent on the length of specific messages entering the system and the frequency with which these messages are exchanged.

For periodic messages, such as surveillance track reports, the message frequency is the product of the total number of tracks to be exchanged per unit of time and the update rate of a track during the same unit of time. For nonperiodic messages, such as control commands or requests for support, the subscriber or his proponents must provide an estimate of frequency of given messages based upon scenarios or experience. The throughput requirement may then be estimated from the product of the average message length and the message frequency.

The throughput requirement should also be reduced to units of time slots per second. The assignment of time slots then becomes dependent on whether throughput or response time requires more capacity. Message update rates are specified in Table 4.1-3 and in the T/R rules for each message.

4.2.3.6 RATE MATCHING REQUIREMENTS

When a PG is established for interconnection with nonJTIDS/MIDS nets or for interfacing certain types of platform systems, the requirement for rate matching may arise. Rate matching is required when the following two conditions exist simultaneously. The first is that the size of the PG time slot assignment must match very closely an arbitrary value that cannot be matched by a single time slot block. The second is that the interval between the time slots must be nearly uniform. The need for a uniform interval arises when a PG containing multiple time slot blocks of different Recurrence Rate Numbers must be interfaced through a buffer with a channel having a uniform rate. The size of the buffer determines the maximum interval between the time slots in the PG. By suitably assigning multiple time slot blocks of the same Recurrence Rate Number, a near match to both requirements can be made. In general, the smaller the Recurrence Rate Number used, the closer the match will be (at the expense of increased fragmentation of the assignable capacity).

4.2.3.7 TRANSMIT ACCESS MODES

The transmit access modes identify the algorithms (rules and procedures) used by a JU in scheduling its transmissions. The scheduling of transmissions involves the assignment of the next available time slot, as constrained by the access mode, to the transmission of the message(s) waiting in queue.

Four access modes are defined: Dedicated Access mode, Contention Access mode, Time Slot Reallocation Access mode, and Call-Up Access mode. Network loading and the communications mode in use will have a bearing on which transmit access mode is selected. The transmit access modes are assigned as a part of the time slot block assignments for each PG.

4.2.3.7.1 DEDICATED ACCESS MODE

Dedicated Access mode time slot assignments are used to increase the probability of receipt of a transmitted message. When there are sufficient time slots available in the network capacity to simultaneously satisfy the information exchange requirements of each JU, the Dedicated Access mode may be used. As the demand for time slots increases, a mixture of Dedicated Access mode and the other two modes will be required to provide each JU with sufficient transmission opportunities. Time slots used for the Dedicated Access mode are assigned to a terminal for its use in transmitting messages. Also, as in the case of the acknowledgement function, a Dedicated Access mode time slot can be assigned temporarily to another terminal for its use in transmitting a message. Normally one terminal participating in an organized JTIDS/MIDS net transmits a message in a time slot assigned as a dedicated access slot; however, Dedicated Access mode time slots may be reused by JUs either beyond or within LOS of each other, depending on the communications performance requirements of the involved JUs.

4.2.3.7.2 TIME SLOT REUSE IN THE DEDICATED ACCESS MODE

In non-LOS situations, a Network Manager may assign the same dedicated access time slot blocks to JUs that do not directly communicate with one another or do not communicate with a common third JU using these assignments. Propagational attenuation should be determined to be sufficient to preclude possible transmission capture between JUs that are not interoperating.

4.2.3.7.3 CONTENTION ACCESS MODE

When there are JUs demanding more time slots than are available in the JTIDS/MIDS network capacity, the Contention Access mode can be selected by the Network Manager. Time slots assigned for the Contention Access mode form a pool that is shared by a community of terminals for transmitting and receiving messages. In this mode, more than one terminal can transmit messages in any specified time slot. If two or more transmissions occur in the same time slot, a receiving terminal will lock onto the message from the closest transmitting terminal, which may or may not be the message it needs. The transmission with the earliest time of arrival (TOA) will be processed by the receiving terminal.

The Contention Access mode can be used only in Communications Mode 1 (wideband transmissions). Time slots are assignable to a particular pool for the Contention Access mode and are used by a terminal to transmit messages belonging to that pool. Transmission time slots belonging to the pool are allowed at an average rate of one transmission per time interval. This transmission slot is selected from all assigned slots that occur during the time interval in a manner that is pseudorandom with respect to the selection process at all other terminals.

4.2.3.7.4 TIME SLOT REALLOCATION ACCESS MODE

This access mode can be selected by the Network Manager when the demand for time slots using dedicated assignments exceeds supply. This mode is useful when user numbers and demands cannot be predicted at initialization and demands may fluctuate with changes in Reporting Responsibility, for example.

This access mode allows the sharing of a specified pool of time slots, referred to as a reallocation pool, with other participating terminals to exchange messages other than voice. A JU determines its time slot requirements for each interval referred to as a reallocation period, and announces the percentage of the reallocation pool's time slots that it desires to use during the next reallocation period in a time slot reallocation message. A JU also repeats, in the same message, the requirements of any JUs previously received in a process known as mutual dissemination.

A JU that has implemented Time Slot Reallocation will be able to operate simultaneously in at least two reallocation pools. Each reallocation pool is associated with only one Network PG and time slots in that pool may be used only for messages from that Network PG. More than one reallocation pool may be operated in a single PG. However, in a single PG, no JU may transmit in more than one reallocation pool. A reallocation pool must be specified in no more than 3 time slot blocks.

JUs allocate capacity to themselves according to their own demands and those heard from the other community members. JUs scale their demands so that the total scaled demand is within the pool capacity. JUs select time slots on a pseudo-random basis, avoiding time slots that they calculate have been allocated to JUs that have a higher priority in the selection sequence. The selection sequence is based on the number of JU demands received by a given JU, either directly, by relay, or by mutual dissemination. The JU hearing the lowest number of demand reports from other terminals selects time slots first and so on, ties being broken by Table Position Number and, if none, by Source Track Number. Thus the Network Manager has no involvement in the time slot selection ordering, either dynamically or at initialization. This combination of pseudo-random selection and ordering by receive count ensures that in very poor connectivity the access method degrades gracefully. In moderate connectivity a small amount of time slot reuse may occur.

4.2.3.7.5 TIME SLOT REUSE IN THE TIME SLOT REALLOCATION ACCESS MODE

The Time Slot Reallocation Access mode is designed to prevent time slot reuse by uniformly scaling down JU capacity allocations in overload conditions. Some reuse may occur in conditions of poor connectivity. As an initialization option, Network Designers may limit the dissemination of the demand information deliberately so that reuse can occur among widely separated JUs. This is done by setting the maximum dissemination hops parameter to the required number of repetitions of demand information.

4.2.3.7.6 TIME SLOT REALLOCATION INITIAL ENTRY

Each JU that participates in a PG using the Time Slot Reallocation Access mode must initially transmit the J0.7 Time Slot Reallocation message in a Dedicated Access time slot or, if there is no Dedicated Access mode time slot

assignment for the JU, in one of the initial entry time slots. Initial entry time slot assignments are basically dedicated access mode assignments with time slot reuse. A JU that has not joined the reallocation pool uses a time slot from one of these assignments to announce the percentage of the reallocation pool's time slots it desires to use during the next reallocation period. JUs that have a time slot assignment using Dedicated Access mode in the PG must use that assignment for this message transmission and do not need an initial entry time slot assignment.

4.2.3.7.7 TIME SLOT REUSE OF THE TIME SLOT REALLOCATION INITIAL ENTRY TIME SLOTS

A Network Manager can limit time slot reuse of the Time Slot Reallocation Initial Entry time slot assignments by giving JUs Dedicated Access mode assignments. However, in situations of limited net capacity, initial entry time slots can be shared by all JUs in an assignment with this access mode. Since these initial entry time slots are used only to enter the reallocation pool, there is a small probability of use by more than one JU in a single time slot. The Network Manager assigns initial entry time slots to meet the response time requirement for JUs entering a reallocation pool.

4.2.3.7.8 CALL-UP ACCESS MODE

In the Call-Up Access mode, information exchange is controlled in the Roll Call or Round Robin modes. When these modes are implemented by the terminals of the participating JUs, the PG time slot blocks are assigned in the Dedicated Access mode. The Roll Call mode is controlled by a Network Manager who has been assigned this specific responsibility. The J0.6 message is used to initiate information exchange by a specific JU and is used by the JU to terminate the exchange. The Round Robin mode requires the assignment of a sequential position to each JU for information exchange. It is also controlled by the J0.6 message.

Both of the Call-Up Access modes have the characteristic that, within a fixed assignment of time slot blocks, the response time automatically increases with increasing traffic loads and decreases with decreasing traffic loads. The platform systems can control the response time by controlling the amount of information that is exchanged. Because of the role of the platform system

in controlling the characteristics of the information exchange, the Call-Up Access modes should be used only when all participating JUs in the PGC have the requisite capability.

The capacity that must to be allocated to a PG that uses the Call-Up Access mode is determined in the same way as for any other PG using a Dedicated Access mode.

4.2.3.7.9 RECEIVE ASSIGNMENTS

Terminals shall receive messages as follows:

a. In all time slots that are assigned specifically as receive slots, on the nets specified in the assignments.

b. In all assigned transmit and paired relay transmit time slots that are not used by the terminal for its own transmissions, on the nets specified for the transmit time slots.

c. In all time slots that have not been assigned specifically as either receive or transmit time slots, on the Initial Entry Network PG net.

d. During those time slots that are specified for message acknowledgements, even when such messages requiring acknowledgement are not addressed to the terminal.

The Network PG to which a time slot is assigned shall not be used as a criterion for rejecting a received message.

4.2.3.8 PARTICIPATION GROUPS ON MULTINETTS

JTIDS/MIDS capacity on a single net is limited to 128 time slots per second. Therefore, no PG may be larger than 128 time slots per second. When the throughput or response time requirements exceed the available capacity of a single net, a PG may be assigned blocks of time slots on other nets. The Network Manager must arrange the blocks from other nets so that minimum conflict (overlap) results if users require interoperability on several PGs. A multinetted PG may have some time slot blocks on one net and other time

slot blocks on another net, provided that no time slot within a PG occurs simultaneously with another time slot in the same PG.

4.2.3.9 MESSAGES USED IN ASSIGNING PARTICIPATION GROUPS

The J0.3 Time Slot Assignment message is used to associate blocks of time slots and their associated cryptovariables with a specific PG number. The J0.7 message is used to request time slots within PGs that contain time slot reallocation pools.

4.2.3.10 NETWORK PARTICIPATION GROUPS DESCRIPTION

Network PGs have been defined to support Link 16 information exchange as follows:

PG 1	-Initial Entry
PG 2	-RTT-A
PG 3	-RTT-B
PG 4	-Network Management
PG 5	-PPLI and Status Group A
PG 6	-PPLI and Status Group B
PG 7	-Surveillance
PG 8	-Mission Management/Weapons Coordination and Management
PG 9	-Control
PG 10	-Electronic Warfare
PG 12	-Voice Group A
PG 13	-Voice Group B
PG 19	-NonC ² JU-to-NonC ² JU A
PG 20	-NonC ² JU-to-NonC ² JU B
PG 21	-Engagement Coordination
PG 22	-Composite A
PG 23	-Composite B
PG 27	-Joint Net PPLI
PG 28	-Distributed Network Management
PG 29	-Residual Messages
PG 30	-IJMS Position and Status
PG 31	-Other IJMS Messages

(Network PG numbers not listed above are currently undefined but may be specified for use in tactical communications plan(s) in accordance with interface operating procedures.)

Participation in a Network PG is the organization and execution of the transmission of messages according to message label and sublabel as described in the JTIDS/MIDS Class 2 System Segment Specification. The host TDS will normally specify in which Network PG a message is to be transmitted. However, for the guidance of network designers and the Network Manager, a standard Network PG and other applicable Network PGs are identified for each message in Table 4.2-1. Not all JUs will be able to exchange the complete list of messages shown, and some JUs may exchange messages in a Network PG other than shown in the Table. Nevertheless, the guidance provided by Table 4.2-1 should provide a firm basis upon which the Network Manager can determine allocations of transmission capability, relay capabilities or cryptographic assignments in the selected functional area(s). In addition, in the absence of different instructions from the host TDS, some terminals will transmit in accordance with the message to standard Network PG applicability given in Table 4.2-1.

Table 4.2-1 Message to Network PG Applicability Table

Message No	Standard NPG	Other Applicable NPGs
J0.0, J0.2	1	-
J0.3, J0.4, J0.6	4	Composite A
J0.5	As required	All except 2, 3, 12, 13
J0.7	As required	All except 2, 3, 12, 13
J1.1	4	6, Composite A
J2.0	7	Composite B
J2.2, J2.3, J2.4, J2.5, J2.6	6	5, 27, 4, 7
J3.0, J3.1, J3.2, J3.3, J3.4, J3.5, J3.6, J3.7	7	Composite B
J5.4	7	29, Composite B
J6.0	7	Composite B
J7.0, J7.2, J7.3, J7.4, J7.5, J7.6, J7.7	7	Composite B
J7.1	7	Composite A
J8.1	7	Composite B
J9.0, J9.2	8	Composite A
J9.1	21	-
J10.2	8	21, Composite A
J10.3, J10.5, J10.6	8	Composite A
J12.0	9	19, 20, Composite A
J12.1, J12.2, J12.3, J12.4, J12.5	9	Composite A
J12.6, J12.7	9	19, 20, Composite A
J13.0, J13.2, J13.3, J13.5	6	5, 27, 8, 9, 10, Composite A
J14.0, J14.2	10	Composite B
J15.0	7	8, Composite B
J17.0	9	19, 20, Composite A
J28.20	As required	All except 2, 3, 12, 13
J31.0, J31.1	4	Composite A
J31.7	As required	All except 2, 3, 12, 13
JTIDS Free Text (Voice)	12/13	-
JTIDS Free Text (Non-Voice)	As required	All except 2, 3, 12, 13
RTT-A	2	5, 6, 27, 30
RTT-B	3	-
IJMS P1, P2, P3, N7-1	30	-
Other IJMS	31	-

4.2.3.10.1 INITIAL ENTRY NETWORK PARTICIPATION GROUP

The first time slot of every 12-second interval is reserved for the transmission and reception of the J0.0 message to support system-wide initial entry. The time slots that satisfy this criterion define the Initial Entry Network PG, which is a fixed assignment shared by all terminals. The fixed block assignments are time slots (512 x N) of Set A, where N is equal to integers 0 through 63. This corresponds to the assignment of Time Slot 0, Set A, with the Recurrence Rate Number equal to 6, and a Net Number equal to 0.

4.2.3.10.2 ROUND-TRIP-TIMING NETWORK PARTICIPATION GROUP

A terminal can accept and use one or more blocks of time slots for transmitting RTT Interrogations and Replies. This Network PG may be used for either RTT-A Interrogations in a Dedicated Access mode or RTT-B Interrogations in a Contention Access mode, or time slots may be assigned within the Network PG for each type. The rate at which RTT Interrogations are transmitted conforms to the requirements for achieving and maintaining Fine Synchronization. These requirements are described in the JTIDS/MIDS Technical Description, Section 3.0 Terms and Definitions.

4.2.3.10.3 NETWORK MANAGEMENT NETWORK PARTICIPATION GROUP

A terminal can accept and use one or more blocks of time slots for transmitting J0 messages. This Network PG may be used for all J0 messages, except for the J0.0 and J0.2 Network Time Update message, in any access mode assigned. J2 messages may be transmitted in a Dedicated Access mode in time slots of this Network PG when there are no J0 messages to be transmitted.

4.2.3.10.4 PRECISE PARTICIPANT LOCATION AND IDENTIFICATION AND STATUS NETWORK PARTICIPATION GROUP

A terminal can accept and use one or more blocks of time slots for transmitting J2 messages in the access mode specified for the transmission. A terminal can operate with three specified groups referred to as the Special Group (Group A), the Common Group (Group B), and the Joint Net. The terminal always transmits its J2 messages in Group B and the Joint Net (except when transmitting Conditional Radio Silence as specified below) at

the specified access rate and mode. The terminal also transmits its J2 messages in Group A, at the specified rate, as follows: (1) when so commanded through the subscriber interface, (2) when it is an active, unconditional relay or an active conditional relay for the main net, voice channel, or control channel relay function, (3) just before it goes to the Conditional Radio Silence mode, or (4) when the host aircraft has set the Flight Leader Indicator in its PPLI message. The terminal shall set the Flight Leader Indicator as directed by the subscriber interface. The terminal shall only transmit Conditional Radio Silence in one NPG. If a transmit slot is not available in Group A, it will then go to Group B. If a transmit slot is not available in Group B, it will then go to the Joint Net. The J13 Platform and System Status messages may be transmitted in the same time slot as J2 messages. Only J2 and J13 messages shall be transmitted in these slots at the specified rate except when in Test Mode 1. When in Test Mode 1, the terminal shall transmit a J0.1 Test message in place of the J2 message in all slots in which it would normally transmit a J2 message.

4.2.3.10.5 SURVEILLANCE NETWORK PARTICIPATION GROUP

A terminal can accept and use one or more blocks of time slots for transmitting surveillance data in the access mode specified for the transmission. Each group of C² JUs that are to participate in a single Surveillance Network PG are to be assigned time slot blocks on a net that supports the Surveillance Network PG.

4.2.3.10.6 MISSION MANAGEMENT/WEAPONS COORDINATION AND MANAGEMENT NETWORK PARTICIPATION GROUP

A terminal can accept and use one or more blocks of time slots for transmitting the Mission Management and the Weapons Coordination and Management messages in the access mode specified for the transmission. Some or all of the time slots in this Network PG can be assigned in the Paired Slot Relay mode, and the J0.5 Repromulgation Relay message can be used with the messages in this Network PG.

4.2.3.10.7 CONTROL NETWORK PARTICIPATION GROUPS

A terminal can accept and use one or more blocks of time slots for transmission of Control information. When the net number is not specified, the block assignment establishes a set of subscriber-selectable channels (stacked net). The terminal enables the subscriber to select a net number from 0 through 126 as a channel. Selection of net number 127 by the subscriber indicates that no channel is in effect for that terminal in that control group. It is possible to assign separate cryptovariables to subsets of these stacked nets.

A specific Control Network PG is assigned to limited sets of JUs for specific tactical operations. The time slot assignments for each PG may be subdivided into subsets of slots assigned to each participant in the Dedicated Access mode, assigned in the Contention Access mode, or assigned in the Time Slot Reallocation Access mode.

The terminal is also capable of accepting blocks of time slots for control with a net number assigned. In this case, the terminal shall use these time slots on the specified net, instead of the applicable common group of time slots, when that net number is selected as a channel using the selector for the applicable common group.

4.2.3.10.8 VOICE

A terminal can accept and use one or more blocks of time slots for voice transmission. The terminal is capable of accepting two common groups of time slots for voice. They are designated Voice Group A and Voice Group B. The net number is not assigned. In this case, for each voice group, the terminal enables the subscriber to select a net number (0 through 126) as the channel. Selection of net number 127 by the subscriber indicates that no channel is in effect for that terminal in that voice group. Multiple subscribers may select the same voice channel, as determined by the communication requirements. It is possible to assign separate cryptovariables to subsets of these stacked nets.

The terminal is also capable of accepting blocks of time slots for voice where the net number is assigned. In this case, the terminal shall use these

time slots on the specified net, instead of the applicable common group of time slots, when that net number is selected as a channel using the selector for the applicable common group.

The terminal can utilize each of the time slot blocks to transmit digitized voice data. Voice can be transmitted using either nonerror-coded free text messages or error-coded free text messages as specified during initialization, depending on the voice data rate. The terminal determines the specific message type to be used depending on the voice group block assignment slot type, the Recurrence Rate, and the error coding option. Voice messages shall normally be handled as nonerror-coded free text messages.

4.2.3.10.9 PARTICIPATION GROUPS FOR DISTRIBUTED NETWORK MANAGEMENT

The U.S. Army terminal can accept and use time slot assignments in this Participation Group to conduct intra-Army communications. Net management messages to establish, maintain, and report connectivity among community members will be transmitted in the broadcast mode in this Participation Group.

4.2.3.10.10 PARTICIPATION GROUP FOR RESIDUAL MESSAGES

A terminal can accept and use time slots in this Participation Group for transmission of messages for which no specific Participation Group has been defined.

4.2.3.10.11 PARTICIPATION GROUPS FOR AN IJMS INTERFACE

Terminals with a bilingual capability can accept and use time slots in these two Participation Groups. These are used by JUs participating in an interface with terminals that implement the Interim JTIDS/MIDS Message Specification (IJMS).

4.2.3.10.12 PARTICIPATION GROUPS FOR JTIDS UNITS PARTICIPATING IN NET CONTROL STATION COMMUNITIES

JUs participating in a given NCS community must be capable of participating in additional Net Management related Needline PGs. These Needline PGs are required to provide capacity for solicitation of new entrants into the community, initialization of Net Control, and connectivity information. These Net Management related Needline PGs are described in the following subparagraphs.

a. Net Status Needline Participation Group. A terminal can accept and use one block of time slots for transmitting and receiving J1.4 Communicant Status messages. The terminal transmits its J1.4 message in dedicated time slots, according to the Net Number, Control Net Entry and Time Slot Offset, Control Net Entry assigned to it by the J1.5 Net Control Initialization message. The terminal receives the J1.4 message of other JUs participating in NCS communities in all other time slots given by the Overall Recurrence Rate, Net Status Participation Group value which is also provided in the J1.5 message. By assigning a different Time Slot Number, Net Status Participation Group value and Time Slot Set, Net Status Participation Group value to each JU in the NCS community, the NCS insures that each participating JU has the opportunity to transmit its J1.4 message without interfering with other participating JUs, exactly once every cycle determined by the Recurrence Rate, Net Status Participation Group value.

The J1.4 messages will be reported periodically in the Net Status Needline Participation Group. The following messages will also be allowed in this Needline Participation Group (pre-empting the J1.4 messages):

(1) The J2.5 Land (Ground) Point PPLI message, reported periodically using the ratio of one PPLI message to every 10(5-20, 1) J1.4 messages.

(2) A J1.1 Connectivity Status message, relayed from a JU wishing to enter the NCS community.

(3) A J0.6 message, initiated when a JU determines a Needline PG inadequacy or failure that must be reported to the NCS.

b. Relaying of Net Status Needline Participation Group Messages to the Net Control Station. In NCS communities all messages reported in the Net Status Needline PG must be received by the NCS. This enables the NCS to monitor the status of the nets under its control, verify that essential connectivity is preserved and adapt to dynamic changes in connectivity. For JUs within LOS of the NCS, the Net Status Needline PG information is received directly. For each JU beyond LOS of the NCS, the NCS must provide a relay for the original Net Status Needline PG information. No additional assignments are necessary for the JUs originating the messages in the Net Status Needline PG. However, to support this relaying, the NCS establishes a route using the Paired Slot Relay mode. This enables all messages reported by JUs participating in the Net Status Needline PG to arrive at the NCS.

c. Net Control Needline Participation Groups. In NCS communities a terminal can accept and use one block of time slots for receiving messages from its division NCS as identified by the Unit Designator. These messages include the J0.1 messages, the J0.3 messages, the J0.4 Radio Relay Control messages, the J1.5 messages, the J1.6 Needline Participation Group Assignment messages and the J8.0 Unit Designator messages. The Net Control Needline PG is assigned to each participating JU using the J1.5 message.

d. Net Control Entry Needline Participation Group. In NCS communities a terminal can accept and use one block of time slots for receiving J1.1 Connectivity Status messages from JUs seeking to reach the NCS as new entrants to the NCS community. The time slot block specifications for new entrants are provided in the J1.4 message. The information broadcast in the J1.4 message is established in either of two ways. The NCS has the option of allowing all JUs to use a database definable default parameter called the Net Control Entry Time Slot Offset, which is common to all JUs participating in an NCS community, or the NCS may deviate from a fixed offset by assigning the Net Control Entry time slot block information directly in the J1.5 message. The JU under control will transmit this information to potentially new entrant JUs in the J1.4 message. The Net Control Entry Time Slot Offset value provides the difference in time slots between the time slot number in which the JU transmits a message in the Net Status Needline PG and the time slot number in which the JU under control is ready to receive a J1.1 message from a new entrant JU. A new entrant JU processes the J1.4 message of the

controlled JU to determine which option is to be used and thus in which time slot its J1.1 message is expected to be received.

4.2.3.10.13 NONC² JU-TO-NONC² JU NETWORK PARTICIPATION GROUPS

A terminal can accept and use one or more blocks of time slots for the exchange of data among a group of nonC² JUs. Operation is normally in a multinet or stacked net structure. The time slot assignments for the PGs may be subdivided into subsets of slots assigned to each participant of a stacked net in the Dedicated Access, Contention Access, or Time Slot Reallocation modes. Joint networks may operate a combination of access modes (some nonC² JUs transmitting in the Dedicated Access mode and some nonC² JUs transmitting in the Contention Access mode and some nonC² JUs transmitting in the Time Slot Reallocation mode). If Control NPG and/or NonC² JU-to-NonC² JU NPG A time slots are made available in the network design, all nonC² JUs on a given mission will exchange data using these time slots. The use of NonC² JU-to-NonC² JU NPG B does not negate or otherwise impact the use of Control NPG and NonC² JU-to-NonC² JU NPG A for the exchange of flight data.

4.2.3.10.14 JOINT ENGAGEMENT COORDINATION NETWORK PARTICIPATION GROUP

A terminal can accept and use one or more blocks of time slots for transmitting the Engagement Coordination message as well as related Surveillance, Information Management, and Weapons Coordination and Management data in the access mode specified for the transmission. The NPG may be used for engagement coordination among systems in a multi-net environment.

4.2.4 CAPACITY CONSTRAINTS

4.2.4.1 GENERAL CAPACITY CONSTRAINTS

In most of the projected scenarios that include the future use of JTIDS/MIDS, a single 98,304-time-slots-per-epoch net will not provide sufficient capacity to meet user requirements for information exchange. The JTIDS/MIDS architecture provides for the simultaneous operation of 128 single nets per TRANSEC variable, but it has been estimated that only about 15 to 20 nets can operate at any one time in a given geographical area without excessive mutual interference.

Security factors that affect JTIDS/MIDS capacity are:

- a. Cryptonet size limitations.
- b. Limiting access on the basis of need-to-know.
- c. Information sensitivity, e.g., long-term vs short-term information, special sources.

An additional capacity constraint also arises. Any given terminal can handle only an assignment of a limited number of time slot blocks, as shown in Table 4.2-2. Because of these limitations, a terminal may not be able to participate in all PGs if the capacity of the PG is fragmented among several time slot blocks. The optimum number of time slot blocks to be assigned depends on the time slot block size, required capacity, required fragmentation, and a terminal's capability to accept additional time slot blocks.

Another capacity constraint is the number of cryptovariables a terminal can use concurrently. This is fixed for each terminal as shown in Table 4.2-2. If "over-the-air rekeying" is employed this permits a terminal to be given new cryptovariables, but it does not increase the terminal's real-time concurrent use of this fixed number of cryptovariables.

TABLE 4.2-2. Time Slot Block Assignment Capabilities (Sheet 1 of 2)

	COMMUNICATIONS MODE	TRANSMIT ACCESS MODE	NUMBER OF CONCURRENT CRYPTOVARIABLES	TIME SLOT BLOCKS TRANSMIT		
				NET NUMBERS	NUMBER OF BLOCKS	RECURRENCE RATE
HIT/ASIT/E-3A AN/URQ-31 (V-5) Hughes	1	Dedicated Only	1	0-31 ^A 32-127	3 Fixed Format, 1 P-Message and Free Text ^D	0-15
Class 1	2,4	Dedicated Only	1	0 32	3 Fixed Format, 1 P-Message and Free Text ^D	0-15
HIT/ASIT/E-3A AN/URQ-33 (V-1) Hughes	1	Dedicated Only	1	0-127 ^A	3 Fixed Format, 1 P-Message and Free Text ^D	0-15
Class 1	2,4	Dedicated Only	1	0	3 Fixed Format, 1 P-Message and Free Text ^D	0-15
AN/URQ-28	1	Dedicated Only	1	0-31 32-127	5 Fixed Format and Free Text	0-15
Singer-Kearfott	2,4	Dedicated Only	1	0 32	5 Fixed Format and Free Text	0-15
Class 2 (ADM)						
FULL-SCALE DEVELOPMENT (FSD)	1	Dedicated, Contention	8 ^B	0-127	Up to 64 ^E	0-15
Singer-Kearfott	2,4	Dedicated	6 ^C	0	Up to 64 ^E	0-15
Class 2						

NOTES

^A Transmission on one net: one net called "Main Net."^B Without over-the-air rekeying.^C With over-the-air rekeying.^D One Block on one net per Unformatted Message Element [UME] control head. Total 20 control heads possible.^E The sum of the TX, RX, and relay time slot block assignments is less than or equal to 64.

TABLE 4.2-2. Time Slot Block Assignment Capabilities (Sheet 2 of 2)

	TIME SLOT BLOCKS (RECEIVE)		TIME SLOT BLOCKS (RELAYS)		
	NET NUMBERS	NUMBER OF BLOCKS	NET NUMBERS	NUMBER OF BLOCKS	RELAY DELAY (SLOTS)
HIT/ASIT/E-3A AN/URQ-31 (V-5) Hughes	0-31 32-127	9 Fixed Format ^F , Default Main Net and Free Text ^D	0-31 ^G 32-127 ^H	3 Fixed Format and 3 Free Text	≡ 3 3,4,5,6
Class 1	0 32	Fixed Format and Free Text	0 32	3 Fixed Format and 3 Free Text	≡ 3 3,4,5,6
HIT/ASIT/E-3A AN/URQ-33 (V-1) Hughes	0-127	9 Fixed Format ^F , Default Main Net and Free Text ^D	0-127 ^G	6 Fixed Format and 6 Free Text Mix	≡ 3
Class 1	0	Fixed Format and Free Text	0	6 Fixed Format and 6 Free Text Mix	≡ 3
AN/URQ-28	0-31 32-127	9 Fixed Format or 6 Free Text	0-31 ^G 32-127	3 Fixed Format and Free Text Mix	≡ 3
Singer-Kearfott	0	Fixed Format and Free Text	0	3 Fixed Format and Free Text Mix	≡ 3
Class 2 (ADM)	32	Free Text	32	Free Text Mix	
FULL-SCALE DEVELOPMENT (FSD) Singer-Kearfott	0-127	Up to 64 ^E	0-127 ^G	Up to 64 ^E	≡ 3
Class 2	0	Up to 64 ^E	0	Up to 64 ^E	≡ 3

NOTES

^D One Block on one net per Unformatted Message Element [UME] control head. Total 20 control heads.^E The sum of the TX, RX, and relay time slot block assignments is less than or equal to 64.^F Three blocks on each of three nets.^G Net-to-net or same net.^H Single net relay only.

4.2.4.1.1 MULTINET OPERATIONS

JTIDS/MIDS provides for multinet operations in which two or more JUs can transmit in the same time slot on different nets to increase communications capacity. A multinet operation can be conducted only in Communications Mode 1 (wideband) where the mutual interference caused by simultaneous transmissions can be tolerated by the inherent jamming protection offered by this mode. It must be noted, however, that multinet operation precludes interoperability and connectivity among users who operate simultaneously on different nets. Because of this, multinetting should be used only when the time slot blocks associated with the particular functions to be accommodated (e.g., Control Network PGs) can be assigned to exclusive communities of JUs performing functions on an organizational basis. JUs operating in one net normally would not need to participate in another net.

In a multinet structure, all nets are mutually synchronized so that each time slot of each net is coincident in time with the corresponding time slot of every other net. Only one unit is designated as the NTR at any given time, establishing one system time for all synchronized nets. A JU can participate in several nets on a time-slot-to-time-slot basis, depending on its assignment.

Multinetting is the simultaneous use of specific blocks of time slots on different nets of a JTIDS/MIDS network independently by different sets of users. Connectivity is not maintained among all users of these time slots.

A stacked net operation is the coordinated use of simultaneous blocks of time slots. These blocks of time slots are characterized by the same Set Number, Initial Slot Number (ISN), and Recurrence Rates, but different net numbers and/or cryptovariables. Time slot blocks may be changed by switch action to select a desired net number.

4.2.4.1.2 RELAY CAPACITY

Relay capability is required for subscribers who must communicate with other subscribers beyond LOS. The relay capacity requirement is directly proportional to the number of relays that are required to reach the destination. The proportionality constraint depends upon the access mode.

The relay capacity requirement may also depend on the location of the relay. A more judiciously positioned relay may require more relay capacity since it will likely be selected to support more subscribers with relay requirements.

To properly estimate the required relay capacity at a particular relay terminal, the Network Manager must sum the relay requirements of each PG that will require the support of the particular relay. In the Paired Slot Relay mode, the Network Manager shall assign the relay receive time slots and the relay transmit time slots to each designated relay. In the Repromulgation or Addressed Relay mode, the Network Manager shall assign all of the relay transmission capacity to the message originator who will then donate time slots to potential relays. Potential relays and destinations must be assigned the same time slots as receive time slots.

Whenever a receive assignment is issued for time slots that will contain relayed messages in the Partitioned Variable mode, the Network Manager must inform the recipient of the total relay delay and original net number. This is not required for messages transmitted in the Common Variable mode.

4.2.4.1.3 MESSAGES USED TO SUPPORT CAPACITY REQUIREMENTS

The J0.0 message provides the basic, minimum, mission independent capacity to process RTT, voice, and PPLI information. The J0.0 message is required for network entry and maintenance.

The J0.3 message supports subscriber oriented, mission dependent capacity assignments.

The J0.4 message assigns relay capacity for use by Conditional and Unconditional Relays operating in the Paired Slot Relay mode.

The J0.5 message or an appropriate Variable Format Message supports the donation of relay transmission time slots.

The J0.6 message is used to request additional capacity or to delete capacity.

The J0.7 message is used to request time slots in a time slot reallocation pool.

4.2.5 RELAY CONTROL

Every JU has the capability to provide relay support for other JUs that are beyond LOS of one or more of their associated PGCs. However, every relay will not be able to provide the full spectrum of relay options. Restrictions such as the PG related relay state or the transmit mode and relay mode likely to be implemented by each JU must be taken into account.

The overall JTIDS/MIDS relay architecture is based upon three compatible, but independent, relay modes whose implementation and usage depend upon the types of JUs involved and the environment in which they operate. The three modes for relay are Paired Slot Relay mode, Repromulgation Relay mode, and Addressed Relay mode.

All relay modes operate on the principle of time slot delay in which messages received in one time slot are relayed at a later time in a specified preallocated or donated transmission time slot. The relay must take place no sooner than the sixth time slot following the time slot in which the original message was received. A terminal must have previously achieved Fine Synchronization in the Normal mode before it can participate in the relay of messages. It is assumed that the performance of relay functions will not degrade the JU's performance in other PGs in which it is expected to participate as a subscriber. Messages which upon receipt have an uncorrectable error are not relayed. RTT Interrogation and Reply messages cannot be relayed.

The following paragraphs provide additional technical considerations for each relay mode.

4.2.5.1 PAIRED SLOT RELAY MODE

The Paired Slot Relay mode requires the selection and assignment of candidate JUs to serve in one of the JTIDS/MIDS terminal relay modes: Unconditional Relay or Conditional Relay. Relay receive time slot blocks and relay

transmission time slot blocks are assigned to each JU that is selected to serve as a relay.

Paired time slot blocks are assigned as a part of each PG that requires Paired Slot Relay mode support. Multiple paired blocks of relay time slots can be assigned to a JU. A JU that operates in the Paired Slot Relay mode shall indicate its Active or Inactive status in its J2 messages. A JU may be assigned to operate in the Paired Slot Relay mode for more than one PG. It may be designated as either an Unconditional relay for each PG to which it is assigned, or it can be a Conditional Relay for main net, voice channels, and/or Control Channels. Paired time slot blocks provide a relatively fixed, dedicated access relay capacity that can be changed only by a Network Manager.

In paired slot relay, messages can be relayed either in the same net number as that on which the original messages are received or on a different net number. In the Partitioned Variable mode terminals can blind relay messages for which they do not hold the MSEC variable and therefore cannot read the messages.

4.2.5.1.1 UNCONDITIONAL RELAY MODE

A JU is assigned to operate as an Unconditional Relay in the Paired Slot Relay mode either during initialization or by a J0.4 message addressed to the JU by the Network Manager. Certain PGs for which relay support is being provided are indicated in the J2 messages of the Unconditional Relay. The Unconditional Relay mode should be assigned to JUs that provide the needed connectivity among JUs that are not within LOS of each other. The JUs selected for this relay mode need a high degree of permanence in the geographical area in which they were originally assigned to relay.

4.2.5.1.2 CONDITIONAL RELAY MODE

A JU is assigned to operate as a Conditional Relay either during initialization or by a J0.4 message addressed to the JU by the Network Manager. Certain PGs for which relay support is being provided are indicated in the J2 messages of the Conditional Relay. If other Conditional or Unconditional Relays are active in the PG and the geographical area covered

by assigned Conditional Relays, as indicated in their J2 messages, and are situated at a higher altitude, the Conditional Relay remains inactive as a relay for this PG. If this is not the case (i.e., if no relay activity is reported in the J2 messages received during a specified period of time), the assigned Conditional Relay becomes active provided it maintains an altitude advantage relative to other JUs. Further details on the Conditional Relay are contained in the JTIDS/MIDS Technical Description Section 3.0, Terms and Definitions.

4.2.5.1.3 MESSAGE DIRECTED RELAY MODE FOR JUS

For JUs participating in an NCS community, a JU may be assigned by the NCS to operate as a relay in a Needline PG. If selected, a JU relays only when a match occurs between the Relay Select field in the J0.4 message and the Message Directed Relay (MDR) field in the Header Extension provided by the source of the needline. On a message-to-message basis, the source terminal alternates messages between two independent relay paths that are established by the NCS using the relay select feature.

4.2.5.2 REPROMULGATION RELAY MODE

As an alternative to the Paired Slot Relay mode that must be previously assigned by the Network Manager, every JU is capable of acting as a relay on a time-slot-to-time-slot basis. The JU must be a member of the PGC for which relay support is required. Multiple hops may be achieved without the need to establish a path ahead of time. However, the messages relayed by the Repromulgation Relay mode cannot be directed to follow a prescribed path unless the terminal has been configured and initialized to perform the Repromulgation Relay filtering function. The messages shall be relayed by all JUs that receive the messages if they are in the active Repromulgation Relay Mode. This relay will occur provided that the donated time slots do not conflict with previously assigned transmission/reception requirements on a different net. The Repromulgation Relay mode does not require intervention of the Network Manager.

4.2.5.3 ADDRESSED RELAY

This relay mode provides a distributed capability to each JU to determine the exact route/path along which a message is relayed. This method is particularly suited to addressed messages in which a centrally managed, Paired Slot Relay mode fails to provide the necessary paths.

The information needed to determine which JUs can be addressed for relay is obtained from the J2 messages and the J1.1 messages. Since management of the relays to be addressed is performed by the subscribing JUs, the Network Manager merely assigns sufficient capacity to each JU to include the relay capacity that is subsequently donated by the originating JU for the use of the relay terminal on a message-by-message basis.

An adaptive routing algorithm must make efficient use of the following items:

- a. A JU's capacity management function.
- b. A JU's position assessment capability.
- c. A JU's identification capability.

A JU's capacity is determined by the time slots assigned to it for transmission and reception. Time slots are assigned either statically or dynamically using the J0.3 message. Position and identification information are also available through dynamic exchange of J2 messages or through other means. An additional level of control over JU relay functions is through a routing algorithm that uses dynamically exchanged J1.0 Connectivity Interrogation messages, J1.1 messages, J1.2 Route Establishment messages. These messages identify the JUs that participate in routing.

The information needed to control a relay by addressing is obtained in two phases, address data initialization and address data maintenance.

The Addressed Relay mode requires address data that identify a JU as a destination or as a relay. In order to originate messages using the Addressed Relay mode, a JU must initialize and maintain an address database that includes the following items:

- a. A destination list (16(16-32,1) TNs).
- b. A direct connectivity list (8(8-16,1) TNs).
- c. Indirect connectivity lists (8(8-16,1) x 8(8-16,1) TNs).
- d. A connectivity matrix (64(48-128,1) x 64(48-128,1) CQs and associated 64(48-128,1) TNs).
- e. Destination associated relay lists (16(16-32,1) x 8(8-10,1) TNs).
- f. Route lists (8(8-16,1) x 8(8-10,1) TNs).

For an explanation of the preceding parameters, see paragraph 5.7.1c.

A JU that can be controlled in the Addressed Relay mode is also required to initialize and maintain a source/route number list with up to 32 entries of source/route number combinations. The use of these lists and matrices is discussed below.

All required information for the address database may not be available at terminal initiation time. Address data initialization must therefore be completed through the use of the J1.0, J1.1, and J1.2 messages.

The messages are exchanged on the same net dedicated to fundamental applications in order to maximize connectivity. Initially, Network Management messages comprise a high percentage of the net capacity. However, as the participating terminals complete their various addressing lists and the connectivity bit matrix, the capacity will be quickly released for predominantly functional exchanges.

When T represents the number of transmitters operating per unit time in a given net, the average Recurrence Rate of each transmitter is given by:

$$a. R = 15 - \log_2 (T/3).$$

The integer part of R may therefore be initially assigned to all transmitting JUs as a baseline for dynamic allocation/reallocation required to adjust and

shift the net from its initial primary orientation of Network Management to a final functional mission orientation.

To complete the address database, a terminal must first have initialized its destination list array. This is normally done through the host platform. To complete the direct connectivity list, one or more of the following alternatives is used: monitoring the Initial Entry Network PG, monitoring the PPLI Network PG and monitoring the RTT Network PG.

The J0.0 message is augmented with local connectivity information. The initializing terminal may transmit RTT Interrogation messages to specific destination terminals to obtain connectivity information.

It is required that each JU shall be within LOS of at least one other JU. If a JU is in danger of isolation, measures must be taken to position additional JUs as required to maintain communications.

During the buildup of its direct connectivity list, a JU may find a TN matching a required destination. Therefore, direct functional communications with that JU may be initiated immediately on the same net.

If one or more destination TNs are not matched by the direct connectivity list, the terminal may begin to build indirect connectivity lists corresponding to JUs given in the direct connectivity list. There are two ways to obtain indirect connectivity lists (assuming they are not available off line). One way is to monitor the addressed communications of directly connected JUs and other JUs. The second way is to use J1.0 messages. Interrogated JUs then reply with J1.1 messages from which indirect connectivity lists can be compiled. By interrogating JUs on the direct connectivity list and subsequently interrogating JUs on the indirect connectivity lists, the required connectivity matrix is completed.

During the buildup of the indirect connectivity lists, a JU may find a TN matching a required destination. Functional communication with that JU is then possible through use of the associated relays. At that point functional messages can be formulated with a header extension word that identifies the relays and provides the capacity required for the relays to retransmit the message.

To achieve routing through multiple relays, several J1.0 messages may be required. By interrogating potential relays identified in the first level of indirect connectivity lists and obtaining their J1.1 messages, a connectivity matrix is initialized. Analogous to a bootstrapping process, destination associated relay lists are also initialized. Once a relay list is completed for a particular destination, functional messages may be exchanged with that destination using the header extension words that identify the associated relays and provide the needed capacity for each relay to transmit the message.

If communications to particular destinations or through a number of relays are frequent, the Route Number may be initialized and established by transmitting a J1.2 message that includes all the relays on the route and that provides the Route Number which shall be used in the header extension words in lieu of the string of relay TNs. A JU receiving a J1.2 message with its own Source TN as a relay or destination is required to store the Route Number along with the Source TN for filtering future receptions. A JU is required to store up to 4(4-8,1) Route Numbers for up to 4(4-8,1) sources. This list is called the source/route number list. A source JU shall establish preferred and alternate routes based upon the connectivity information available and a minimum-hop, path-finding algorithm. Relays on the route are stored in lists called route lists. The route list is identified by a Route Number. For each Route Number, a variable number of up to 16 relays and/or destination TNs make up the route list.

The control over the initialization of the JU address database is two-fold. Initialization may proceed under direct control by an operator or host computer. In contrast, the initialization process may proceed automatically employing a trial and error search algorithm. Maintenance of the JU address database is similarly controlled. However, J1.0, J1.1 and J1.2 messages are exchanged at a much slower rate during database maintenance.

The general message flow from a source perspective is diagramed in Figure 4.2-1. A normal sequence of events is identified through the time slot subscripts. The general message flow from a relay/destination perspective is diagramed in Figure 4.2-2.

4.2.5.4 MESSAGES USED IN SUPPORT OF THE RELAY METHODS

The J2 messages are used to support the Paired Slot Relay and Addressed Relay modes.

The J0.0 message provides optional connectivity information to support the Addressed Relay mode.

The J0.4 message is required to assign relays and paired time slot blocks to support the Paired Slot Relay mode.

The J0.5 message supports the Repromulgation Relay mode.

The J1.0, J1.1, and J1.2 messages support the Addressed Relay mode.

4.2.6 NETWORK INITIALIZATION, ENTRY, MAINTENANCE, AND EXIT

A JU designated as the NTR is essential to network initialization, entry, and maintenance. The NTR must be assigned by the Network Manager. In addition, alternate NTRs must be identified and activated by the Network Manager in nonreal time through a nonJTIDS/MIDS communications medium.

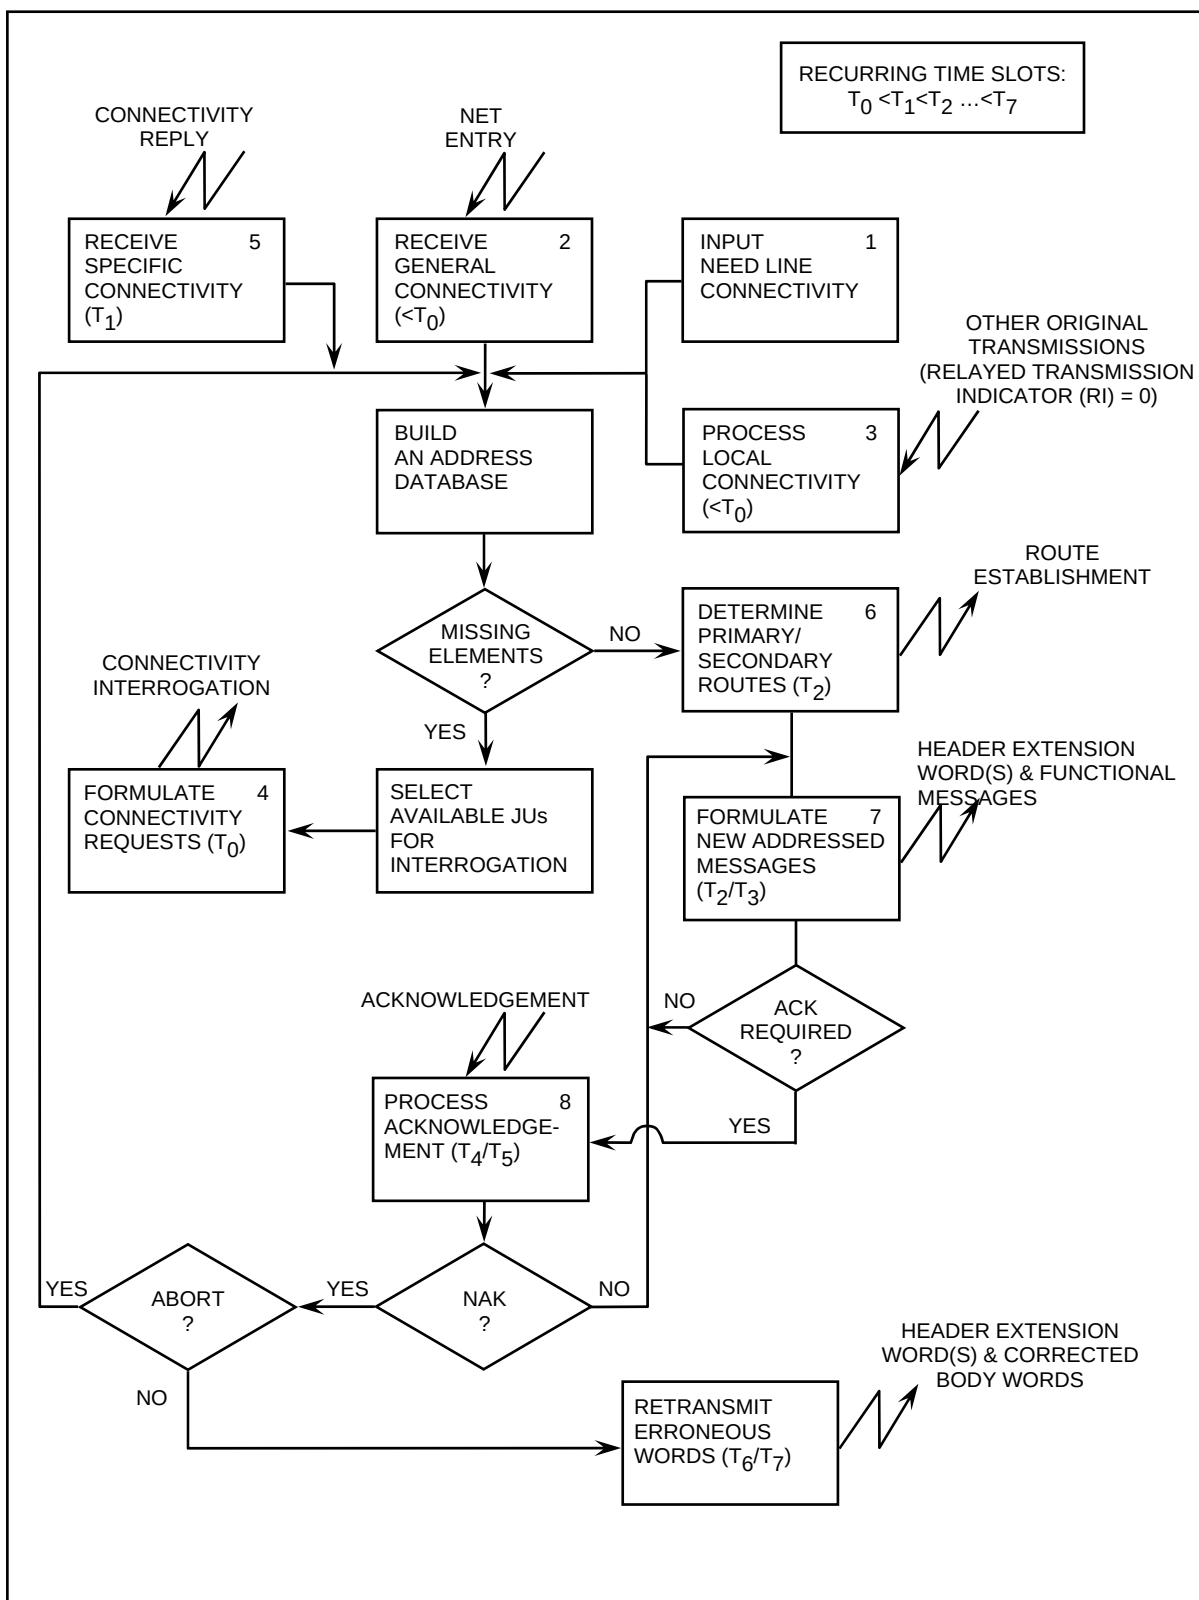


FIGURE 4.2-1. General Data Flow Routing (Source Perspective)

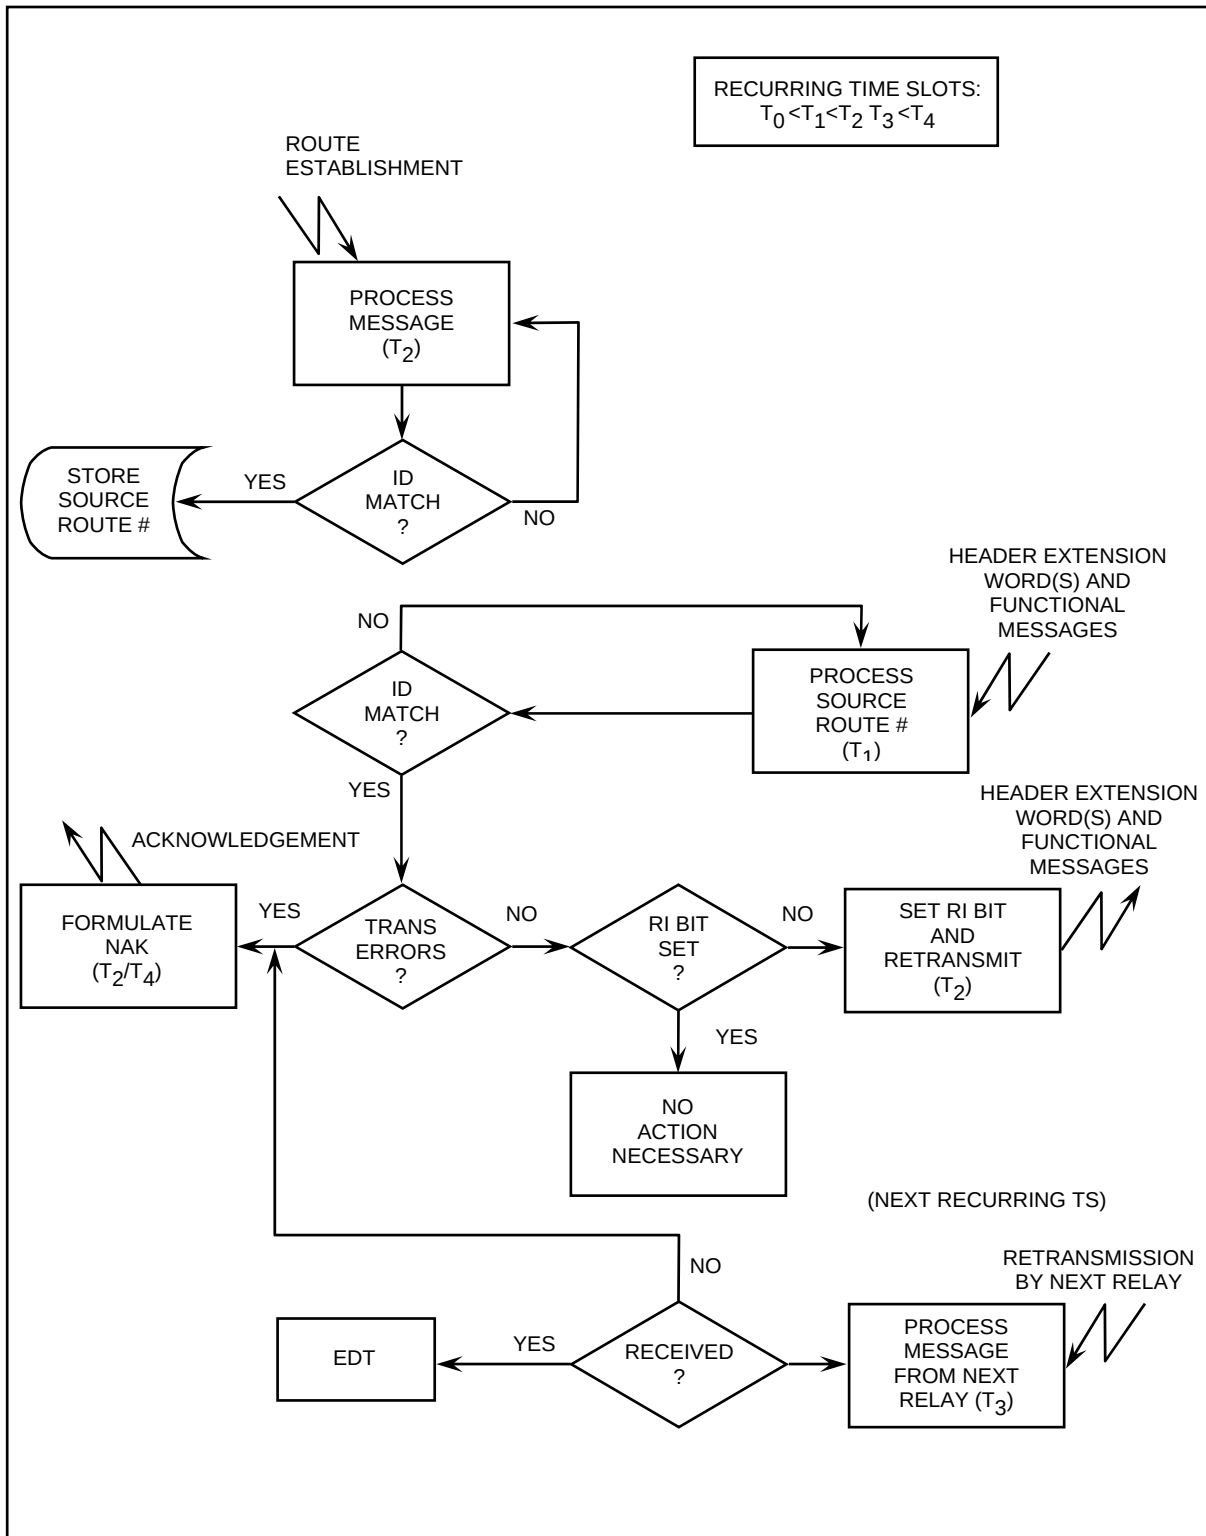


FIGURE 4.2-2. General Data Flow Routing (Relay/Destination Perspective)

A JU becomes an NTR through operator action once it is assigned by the Network Manager. When an NTR JU starts to transmit messages, other JUs may enter the network after initializing themselves as Primary Users (by employing RTT messages) or as Secondary Users (by employing J2 messages) during achievement of Fine Synchronization. As identified by the J0.0 message, special PGs called RTT and PPLI are allocated on the main net (Net Number 0) for all JUs. The Network Entry PG is Set A, with ISN equal to 0, and RRN equal to 6. This assignment is built into all Class 2 JTIDS/MIDS terminals and, for operational purposes, it is a fixed assignment.

Maintenance of network synchronization is automatic. It does not require Network Manager intervention except as already discussed under dynamic time slot management; it does require that the NTR is functioning properly.

To facilitate Network Management, JUs that exit the network are required to transmit their change of participation status. Dynamically allocated capacity to an existing JU may be cleared for reallocation to JUs that have requested more capacity or to new JUs that have recently entered the network.

When over-the-air rekeying is used, the Net Manager is responsible for the administration, coordination and distribution of a unique variable to each of the subscribers in his net in accordance with COMSEC procedures. The unique variable is used by the KGV-8 to decrypt and process J31.0 Over-the-Air Rekeying Management and J31.1 Over-the-Air Rekeying messages.

4.2.6.1 JTIDS/MIDS UNIT TERMINAL INITIALIZATION

The JU terminal must be initialized properly to support Network Management. All terminals in a network must be initialized to operate in a common communications mode, common time of day, and common network entry TRANSEC cryptovvariable. Network time is the clock time of the JU that has been designated to be NTR. Ideally, this time should be the same as Greenwich Mean Time (GMT) or some other standard time. The primary reason for using a standard time is to facilitate network entry.

Additional JU terminal initialization parameters depend upon the subscriber's mission and the degree to which the Network Manager can rely upon a particular subscriber to support the network entry, relay, and network

maintenance functions. The JU identified by the Network Manager to act as an NTR shall initialize the Organization User Type as NTR. All JUs have the option, depending upon their mission, to declare their Organization User Type as Navigation Controller (NC) and/or Position Reference (PR). All JUs except the NTR, NC, and PR shall declare their Organization User Type as Primary User or Secondary User. NCs and PRs are Primary Users. NonNTR JUs must also enter the uncertainty of the time of day into the terminal. JUs that are Secondary Users must enter their initial position and position quality to enable them to achieve Fine Synchronization. The Network Manager must provide initial time slot blocks for the NTR and Primary Users to transmit J2 messages essential for achieving Fine Synchronization using the Passive mode.

A JU identified by the Network Manager to serve as a Conditional or Unconditional Relay shall initialize its relay assignments for each time slot block specified by the Network Manager. The relay assignments may be subsequently updated by the J0.4 message.

JUs that are Primary Users must be assigned RTT time slot blocks for use in interrogating the NTR, other Primary Users, PRs and NCs. Two types of RTT Interrogations are possible: RTT Interrogation-Addressed and RTT Interrogation-Broadcast. The Network Manager may preclude the use of one type or the other by not assigning time slot pools. RTT-A may be transmitted only in a dedicated pool, and RTT-B may be transmitted only in a contention pool. If both types of pools are assigned, the JU shall transmit the appropriate RTT message in the next available time slot assigned for RTT transmissions commensurate with the time quality triggering the requirement.

A JU (other than the NTR or an active main net relay) that is selected by the Network Manager to facilitate the network entry of other JUs by transmitting J0.0 messages must be initialized as an IEJU.

Prior to initialization, each JU shall be provided with the following:

- a. Network entry parameters (net number and network entry TRANSEC and MSEC, as required) associated with the joint Network Manager or a subordinate Network Manager (intra-Service).

b. Time slot assignments and their associated cryptovariables for the static PGs.

c. A "unique variable" if over-the-air rekeying is used.

4.2.6.2 NETWORK ENTRY

The process of network entry is described in the following paragraphs.

4.2.6.2.1 FIRST JTIDS/MIDS UNIT IN THE NETWORK

Figure 4.2-3 shows the network entry process in flowchart form. The first JU in the network is initially designated the NTR JU and enters the network entry TRANSEC cryptovariable, MSEC cryptovariable if required, and network time. (There is only one NTR JU in a JTIDS/MIDS network.) This unit's transmit time slots are assigned during terminal initiation (e.g., by operations order or by operator designation). Once time slots are assigned, the JU can then begin transmitting J0 messages, J2 messages, and others.

4.2.6.2.2 SECOND AND SUBSEQUENT JTIDS/MIDS UNITS ENTERING THE NETWORK

Once an NTR JU has initiated a JTIDS/MIDS network, another JU enters the network by:

- a. Entering the TRANSEC cryptovariable and MSEC cryptovariable as required.
- b. Entering network time with an estimated uncertainty.
- c. Entering a position estimate and position quality (for the Passive mode of synchronization, using J2 messages).
- d. Entering the desired synchronization method:
 - Active.
 - Passive.
- e. Attempting receipt of the J0.0 messages, which will enable Coarse Synchronization. (The NTR, active main net relays, and IEJUs will transmit

J0.0 messages in known time slots.) (A JU participating in an NCS community may also be initialized over-the-air using the J1.5 message to activate as an IEJU.)

Receipt of a J0.0 message establishes Coarse Synchronization. Once Coarse Synchronization is established, the unit can receive on all time slots and can achieve Fine Synchronization either Actively or Passively. If the Passive mode is selected, the unit must receive J2 messages until Fine Synchronization is achieved. Selection of the Active mode for Fine Synchronization requires the assignment of time slots for RTT Interrogation and Reply exchange.

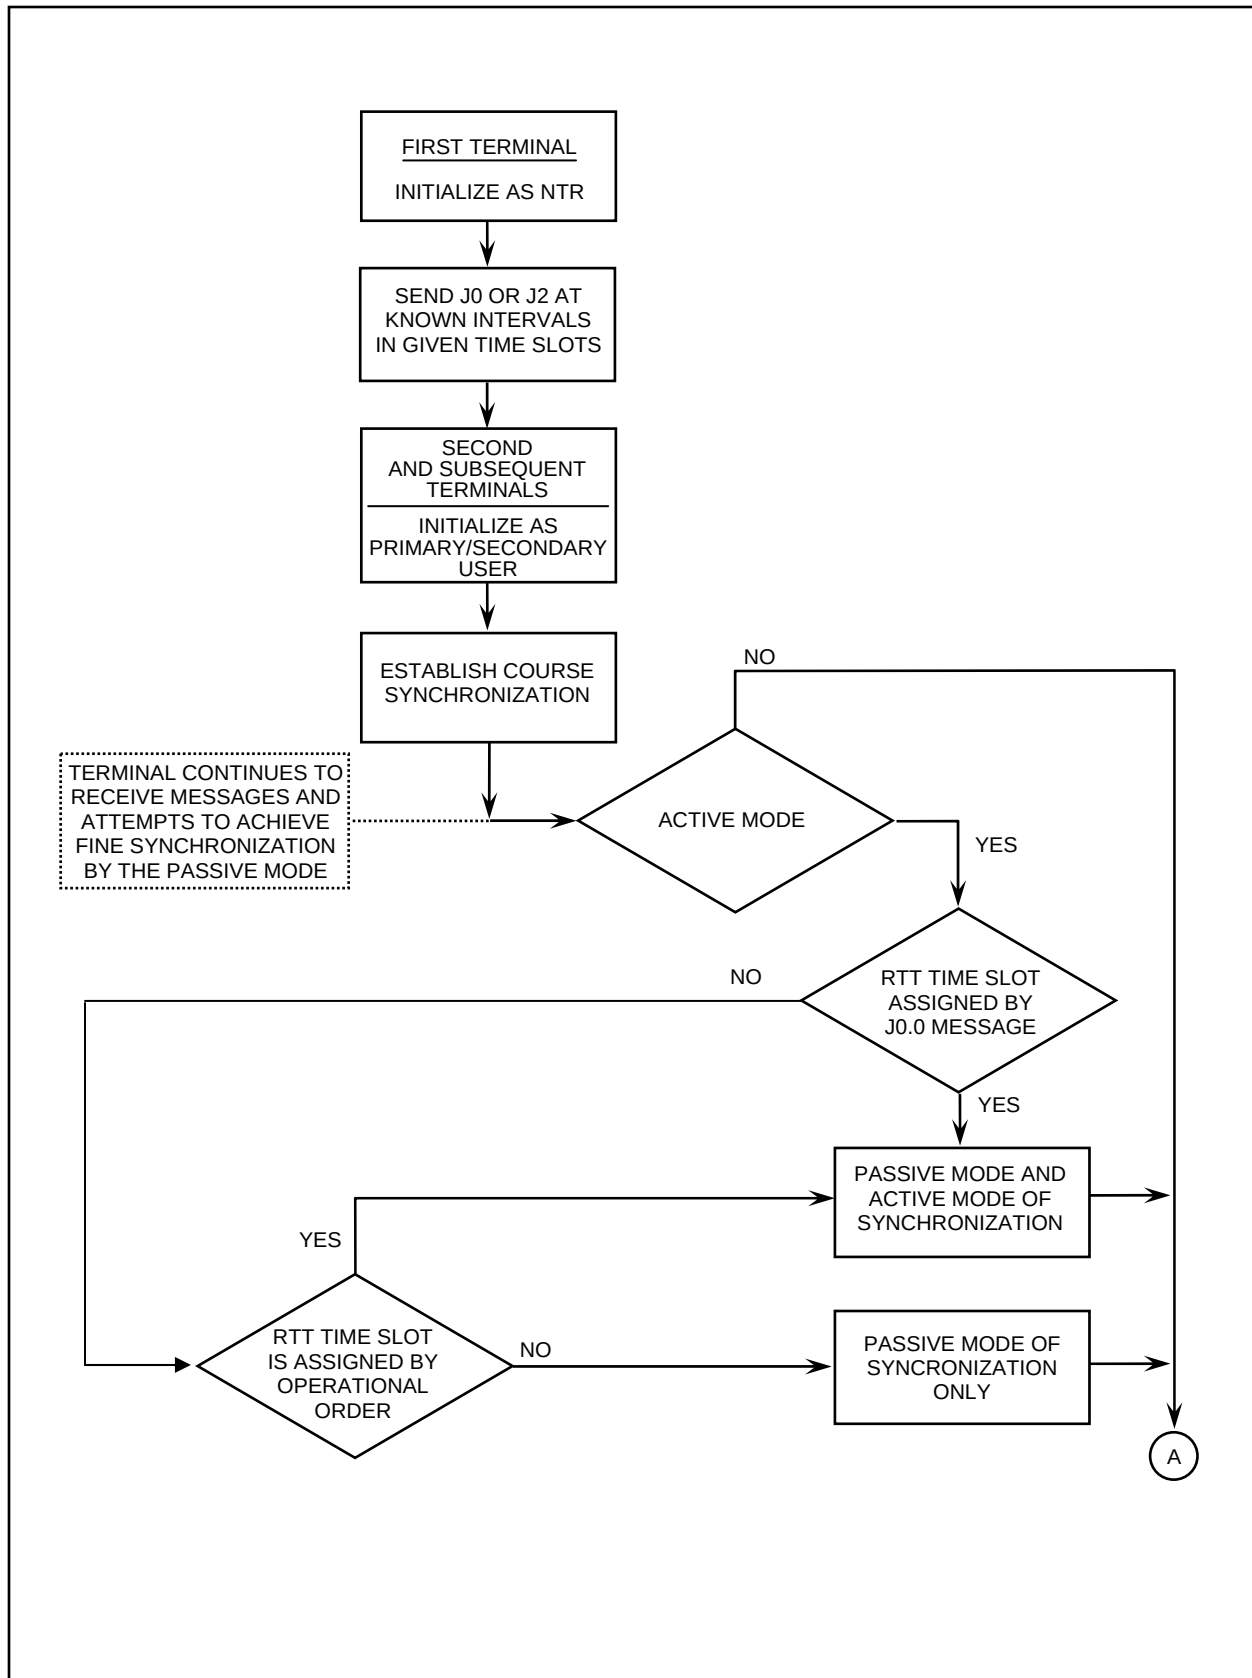


FIGURE 4.2-3. Flow Diagram of Network Entry (Sheet 1 of 2)

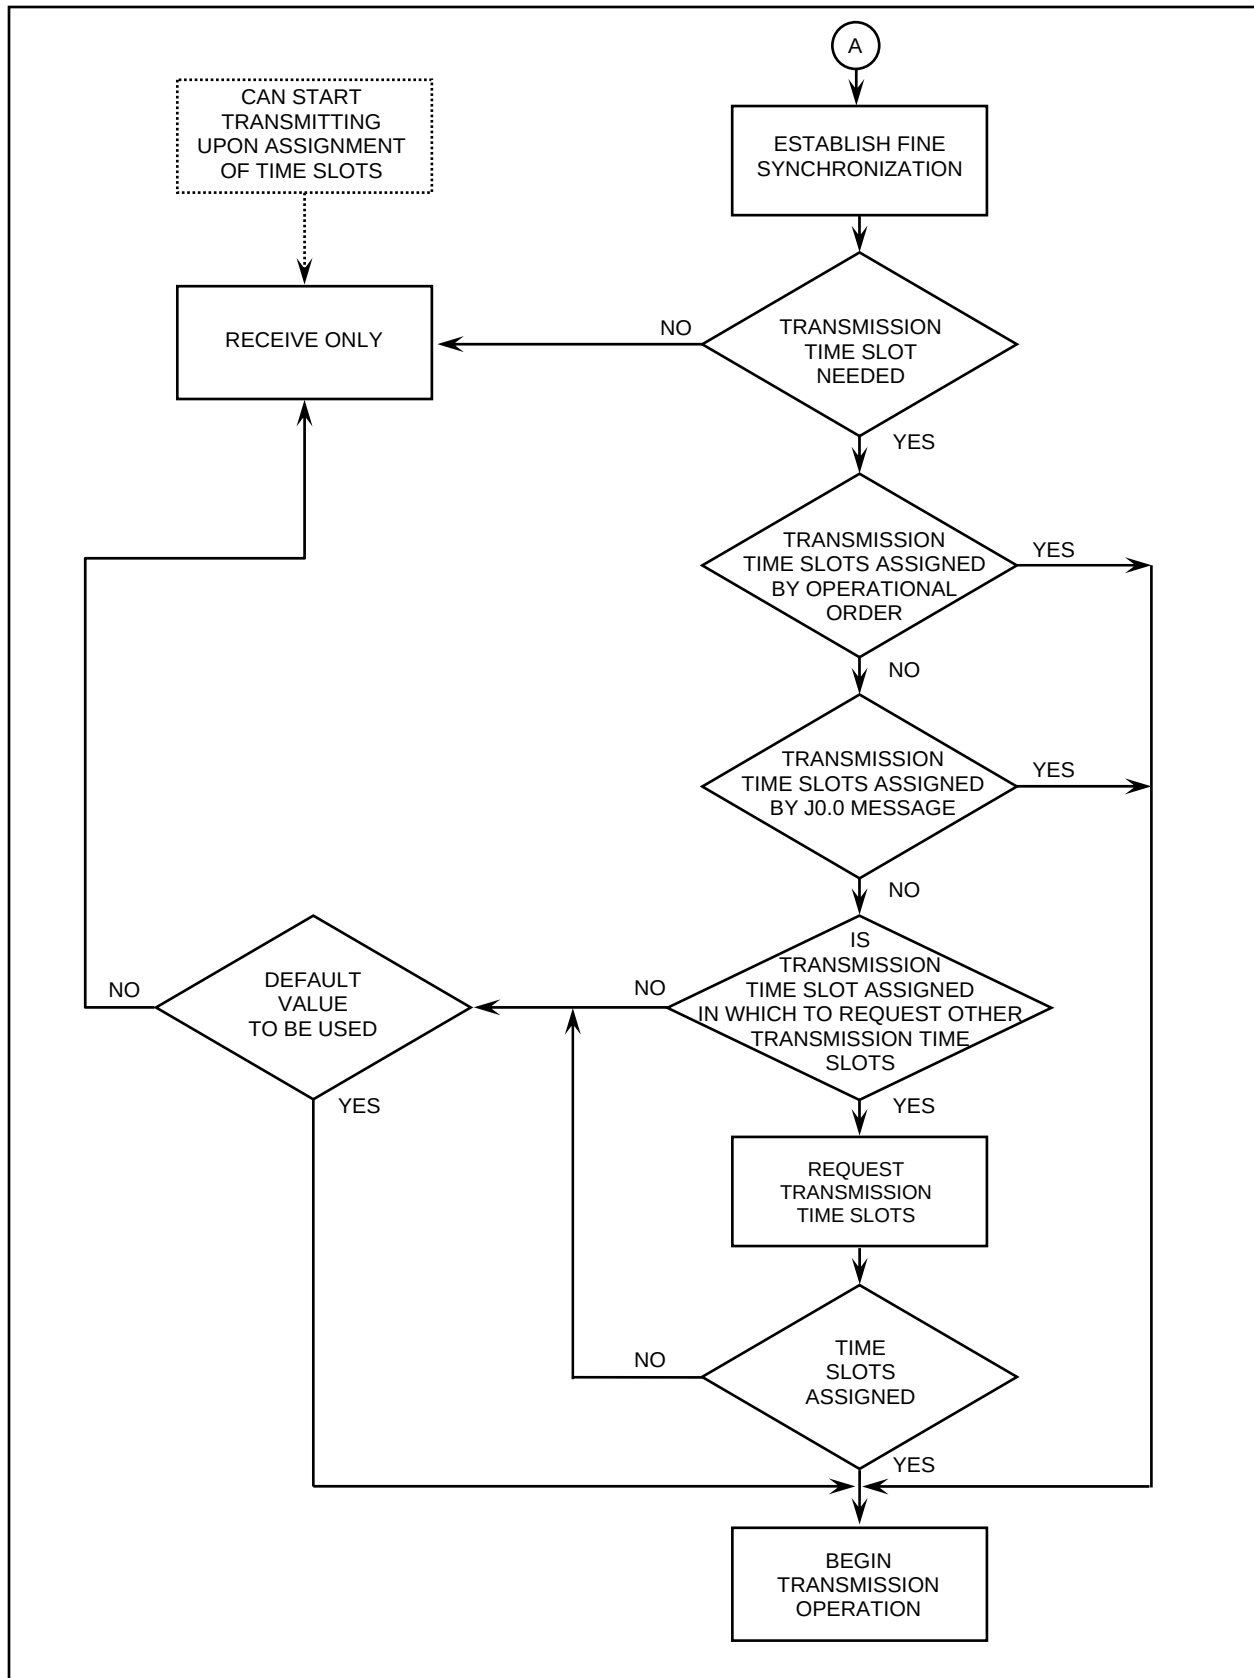


FIGURE 4.2-3. Flow Diagram of Network Entry (Sheet 2 of 2)

4.2.6.2.3 ACTIVE MODE FOR ACHIEVING SYNCHRONIZATION

A JU operating as a Primary User shall use the Active mode to obtain and maintain Fine Synchronization. The Active mode uses RTT Interrogations and RTT Replies. The RTT-B Interrogation is used to transmit a nonaddressed (broadcast) interrogation and is used in the RTT group in the Contention Access mode. Otherwise, the RTT-A Interrogation, which is addressed to a specified terminal, is used. Computation of system time from an RTT Interrogation/Reply sequence using either interrogation type provides the same accuracy. Independently derived position data are not required or used when operating in the Active mode.

The terminal responds to RTT Interrogations unless the terminal is in the Conditional Radio Silence or Polling mode or the last pulse of the interrogation arrives later than 3,375 microseconds after the start of the time slot. The RTT Reply is transmitted, in the same time slot and net as the RTT Interrogation, 4,275 microseconds after the start of the time slot. In the RTT group, the terminal programs to receive interrogations on a net number equal to its own time quality. The initiation of an RTT sequence will not exceed a rate of once per three minutes. Use of the Active mode does not preclude the simultaneous use of the Passive mode.

4.2.6.2.4 TIME SLOTS FOR ROUND-TRIP-TIMING EXCHANGE

RTT transmit time slots are assigned during terminal initialization or by the J0.0 message. Once the transmit time slots are defined, the RTT exchange can commence. A unit will not transmit messages other than RTT Interrogations until Fine Synchronization is achieved. The process of achieving Fine Synchronization shall be repeated as required.

4.2.6.2.5 PASSIVE MODE FOR ACHIEVING SYNCHRONIZATION

A JU operating as a Secondary User achieves and maintains Fine Synchronization primarily in the Passive mode. In the Passive mode, the terminal processes selected J2 messages and TOA data in a combined navigation/synchronization filter. Passive synchronization is performed without any transmissions by the terminal. However, if the terminal is not operating in the Radio Silence mode, Secondary Users may use RTT to augment

the basic Passive mode only under conditions of initial Fine Synchronization when good geometry for the Passive mode does not exist. Secondary Users initiate an RTT sequence only as required to maintain a time variance within 25% of position variance, but not more often than one RTT sequence per epoch.

4.2.6.2.6 NET CONTROL STATION COMMUNITY NET CONTROL ENTRY

In an NCS community, Net Control Entry procedures are initiated after a JU achieves Fine Synchronization. The NCS JU will be the first JU to solicit other JUs with the same Community Designator that need to achieve Net Control Entry. Net Control Entry is said to be achieved when a JU receives the J1.5 message from the NCS, and the JU responds with periodic J1.4 messages. The following definitions are also often used in describing Net Control Entry:

- a. Communicant - a transmitting JU capable of being heard directly (without relay) by a receiving JU.
- b. Community of JUs - a community of JUs initialized to have the same Community Designator.
- c. Intracommunity Communicant - a transmitting JU holding a Community Designator identical to that of the receiving JU.
- d. Intercommunity Communicant - a transmitting JU holding a Community Designator different than that of the receiving JU.
- e. External Communicant - a transmitting JU not initialized to have a Community Designator.

The NCS is the first JU to be initialized in its own community of JUs. The NCS builds the control network for its community by transmitting J1.4 messages in the Net Status Needline PG. The J1.4 message solicits JUs in its community to enter the NCS control network by providing information necessary to compute the time slot in which the transmitting JU (initially only the NCS) will expect to receive the J1.1 message to be transmitted by the JUs that are in line-of-sight of the transmitter and wish to enter the NCS community. Thus all JUs attempting Net Control Entry that are within LOS of the NCS will be in contention during this time slot; the new entrant whose

transmission is captured by the NCS will achieve Net Control Entry first. Since any JU will continue to attempt Net Control Entry by repeatedly responding to net entry solicitations, all JUs within LOS of the NCS will eventually achieve Net Control Entry.

The NCS establishes these JUs as the first level of relays; these JUs in turn begin to solicit their intracommunity LOS communicants beyond LOS of the NCS to achieve Net Control Entry. In order for the NCS to transmit a J1.5 message to JUs beyond its LOS, the NCS must establish a route to the new entrant JU using J0.4 messages. While monitoring transmissions on the net number of this Net Status Needline PG, a new entrant JU is accumulating a list of communicants by inspecting the header of every message it receives and computing the connectivity quality from each communicant by counting erasures received within one time slot.

In case of an NCS failure, the backup NCS must reestablish Net Control Entry for all JUs under the control of the failed NCS. JUs beyond LOS of the failed NCS are made aware of the failure by processing the J1.4 message of JUs closer or within LOS of the failed NCS.

4.2.6.3 NETWORK MAINTENANCE

JTIDS/MIDS network maintenance includes maintenance of the synchronization process and the connectivity process. The maintenance of both processes is facilitated by monitoring the Network Participation Status Indicator (NPS IND) to determine if JUs key to synchronization and connectivity (such as the NTR), network entry, and active or potentially active relay service are operational or require replacement. The Network Manager shall identify JUs as candidate alternates to accommodate these functions. Alternates shall not be activated until required based upon the NPS IND of the active NTR, IEJUs, and relay JUs. If possible, the JUs actively performing these functions shall be notified when the assignments are to be changed or deleted.

JUs participating in an NCS community must monitor the status of each path of their own Needline PGs using acknowledgement techniques and periodic "probe" messages. Since needlines may be response time driven, their allocated time slots may far exceed their actual usage. "Probe" messages will be sent by source JUs during every eighth allocated time slot starting with the first

executable time slot if no other messages are awaiting transmission. The destination JU will determine the path performance using a sequential hypothesis algorithm. If the algorithm indicates a path failure, the destination JU will transmit the J0.6 message to the NCS indicating which Needline PG has failed and requesting corrective action. The NCS will analyze the failure to determine the required corrective action, which may range from taking no corrective action, if failure is analyzed to be temporary, to the provision of a complete replacement for the failed path.

4.2.6.3.1 NETWORK TIME UPDATE

Whenever the J0.2 message is received in an initial entry time slot, all JUs designated to transmit the J0.0 message shall begin transmitting the J0.2 message following the J0.0 message in the initial entry time slot. The JUs shall continue these transmissions until the execution time in the J0.2 message.

4.2.6.3.2 NETWORK PARTICIPATION STATUS

A Link 11, 11B, or 16 unit shall be considered in either an Active (full interface participant) Status, Inactive (not participating in the interface) Status, or Limited (interface participation less than full) Status on the interface.

a. Active Status. A Link 11, 11B, or 16 unit shall be considered in the Active status on the interface when the NPS IND in the J2 messages is set to Active. A Link 16 participant in the Active Status must be in the Normal mode, in Fine Synchronization, and capable of exchanging messages on the JTIDS/MIDS network.

b. Return to an Active Status. Return to an Active Status is shown in Figure 4.2-4. A JU shall return to Active Status after leaving the network (Terminal Off or Loss of Coarse Synchronization) by following the net entry procedure as stated in paragraph 4.2.6.2.2. A JU shall return to Active Status from the Radio Silence mode, the Polling mode, Loss of Fine Synchronization mode, TDS Failure mode, Receiver High Message Error Rate mode, Transmitter Failure mode, Out of Range/Masked mode, or Receiver Failure mode by transmitting the J2 message with the NPS IND field set to Active.

When an FJU determines that a PU or RU has returned to Active Status, it shall set the NPS IND to Active in the J2.0 Indirect Interface Unit PPLI message.

c. Inactive Status. A PU, RU, or JU shall be considered in an Inactive Status on the interface upon receipt of a J2 message with the NPS IND set to Inactive or if a J2 message has not been received on that unit for a period of at least 60 seconds.

d. Changing to Inactive Status. A JU shall set the NPS IND to Inactive immediately prior to leaving the JTIDS/MIDS network. Additionally, when a FJU determines that a PU/RU is Inactive, it shall set the NPS IND to Inactive in the J2.0 message for the PU/RU.

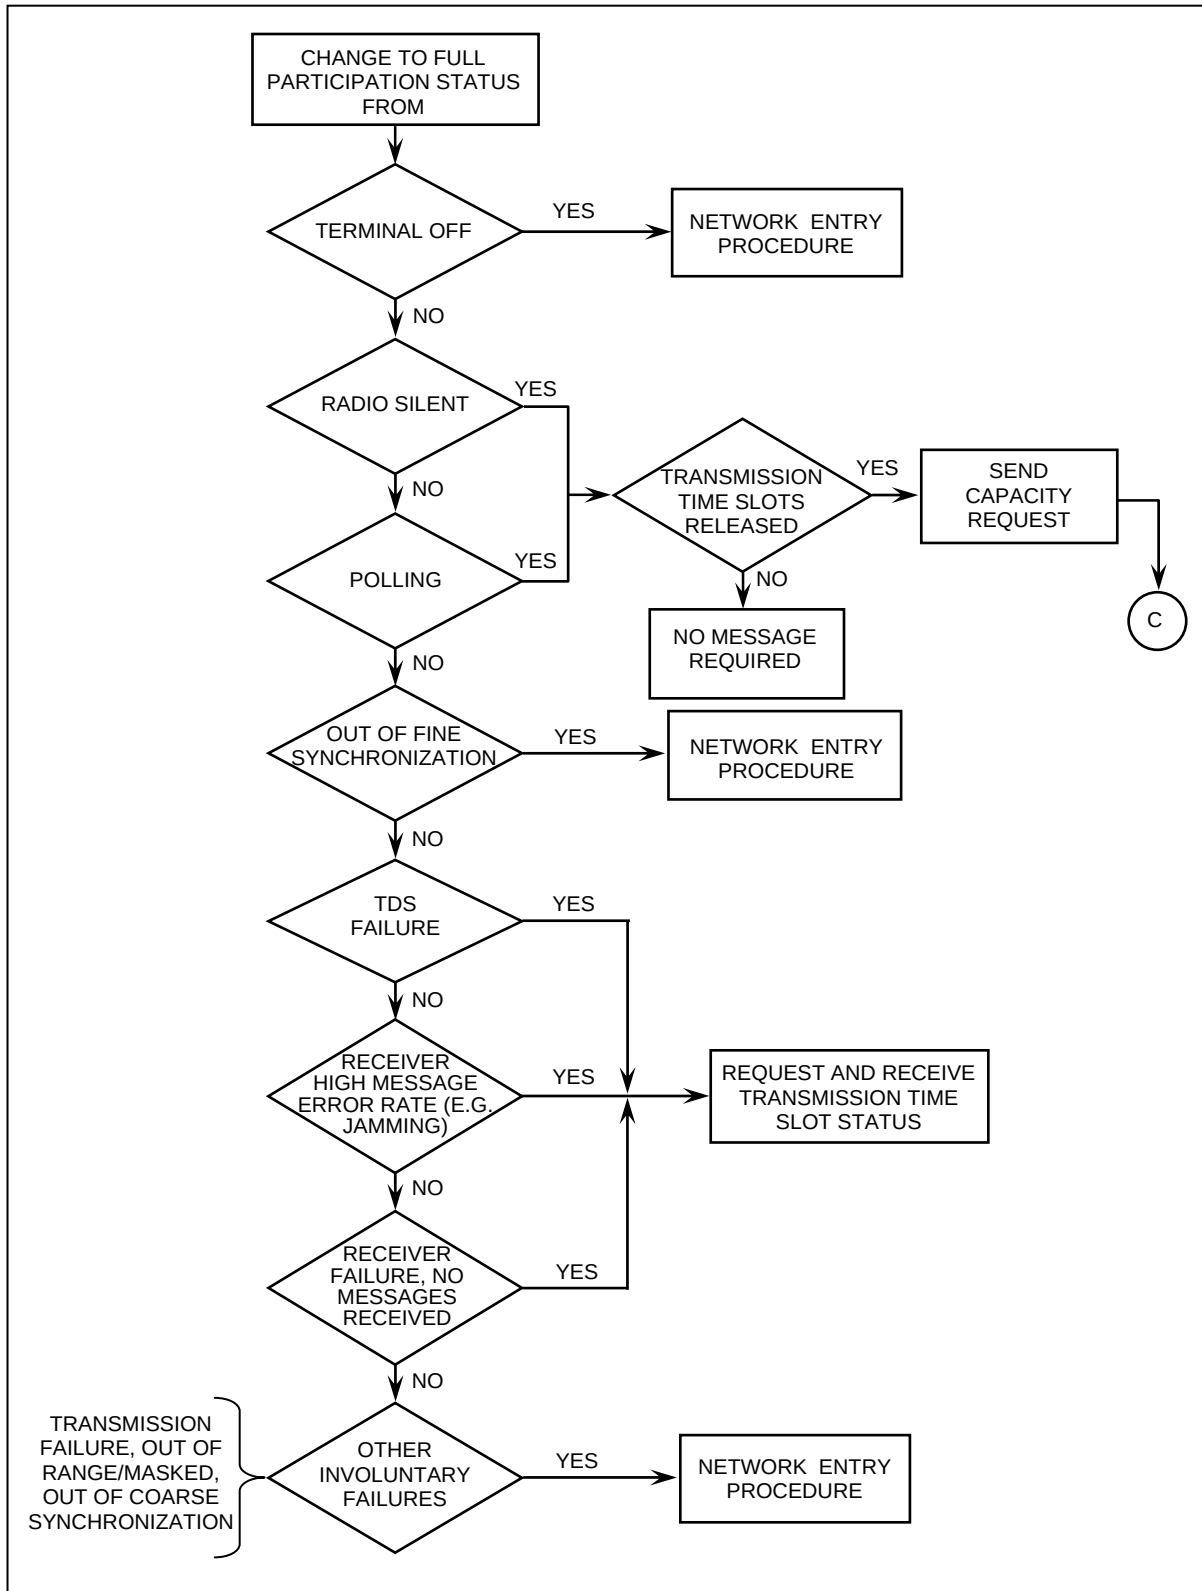


FIGURE 4.2-4. Flow Diagram of Network Participation Status Change to Active Status (Sheet 1 of 2)

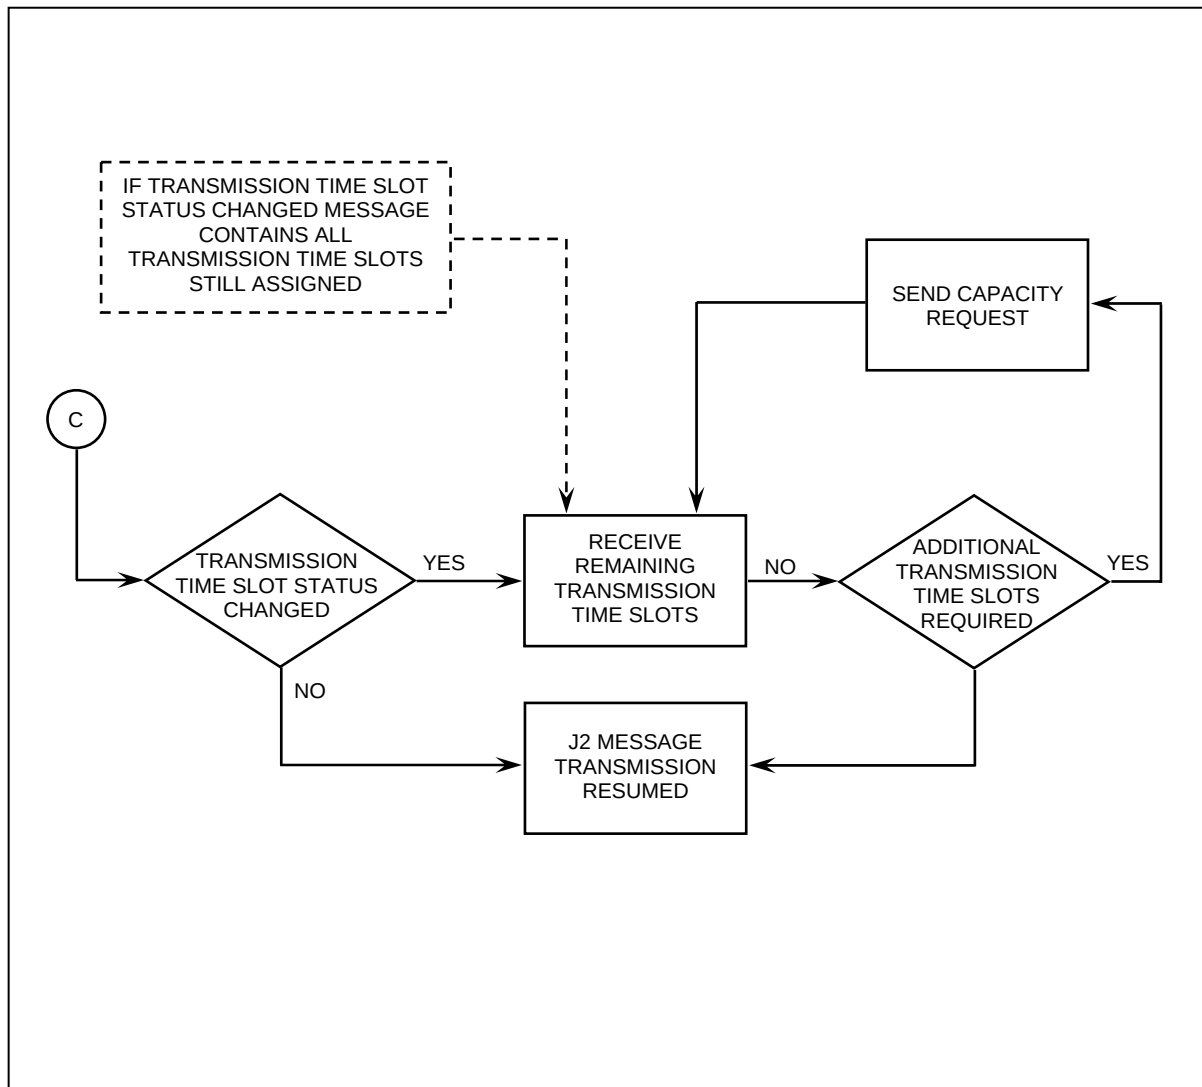


FIGURE 4.2-4. Flow Diagram of Network Participation Status Change to Active Status (Sheet 2 of 2)

e. Limited Status. The change to Limited Status is shown in Figure 4.2-5. The decision on retention of time slots is an operator decision. A JU shall be considered in a Limited Status on the interface when the NPS IND is set to any of the following:

- (1) Polling.
- (2) Radio Silence.
- (3) No J0.0 Message Being Received.
- (4) High Error Rate.
- (5) TDS Failure.

f. Polling and Radio Silence Modes. The Polling and Radio Silence modes are described in Section 3, Terms and Definitions. A Link 16 unit shall set the appropriate value in the NPS IND when changing to one of these Limited Statuses.

g. No J0.0 Message Being Received. Some causes of No J0.0 Message Being Received are receiver failure, being out of range, or being out of LOS. When a J0.0 message has not been received for 120(60-180,12) seconds, the terminal shall alert the operator and set the NPS IND to No J0.0 Message Being Received. Network entry opportunities are discussed in paragraph 4.2.3.10.1. (This indicator may provide input to the conditional relay algorithm of a receiving terminal to determine possible activation of the Relay Function.)

h. High Error Rate. A High Error Rate of received messages can be caused by a number of conditions, including jamming. The NPS IND shall be set to High Error Rate when the ratio of messages received with error to the total messages received exceeds 10(5-100,5)%.

i. Tactical Data System Failure. The NPS IND shall be set to TDS Failure when the terminal can no longer communicate with the host TDS.

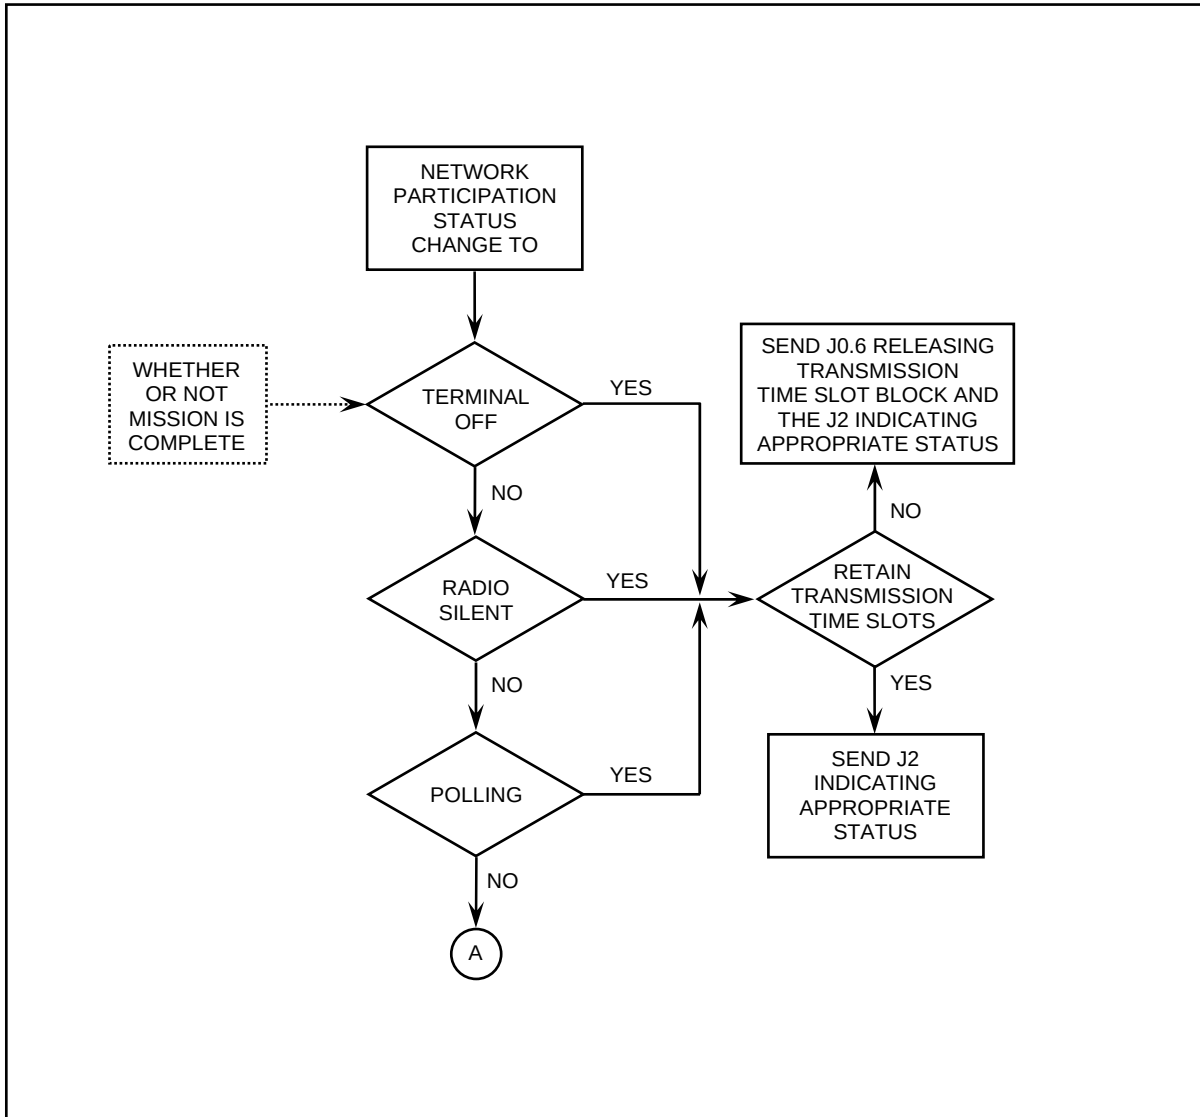


FIGURE 4.2-5. Flow Diagram of Network Participation Status Change to Limited Status (Sheet 1 of 2)

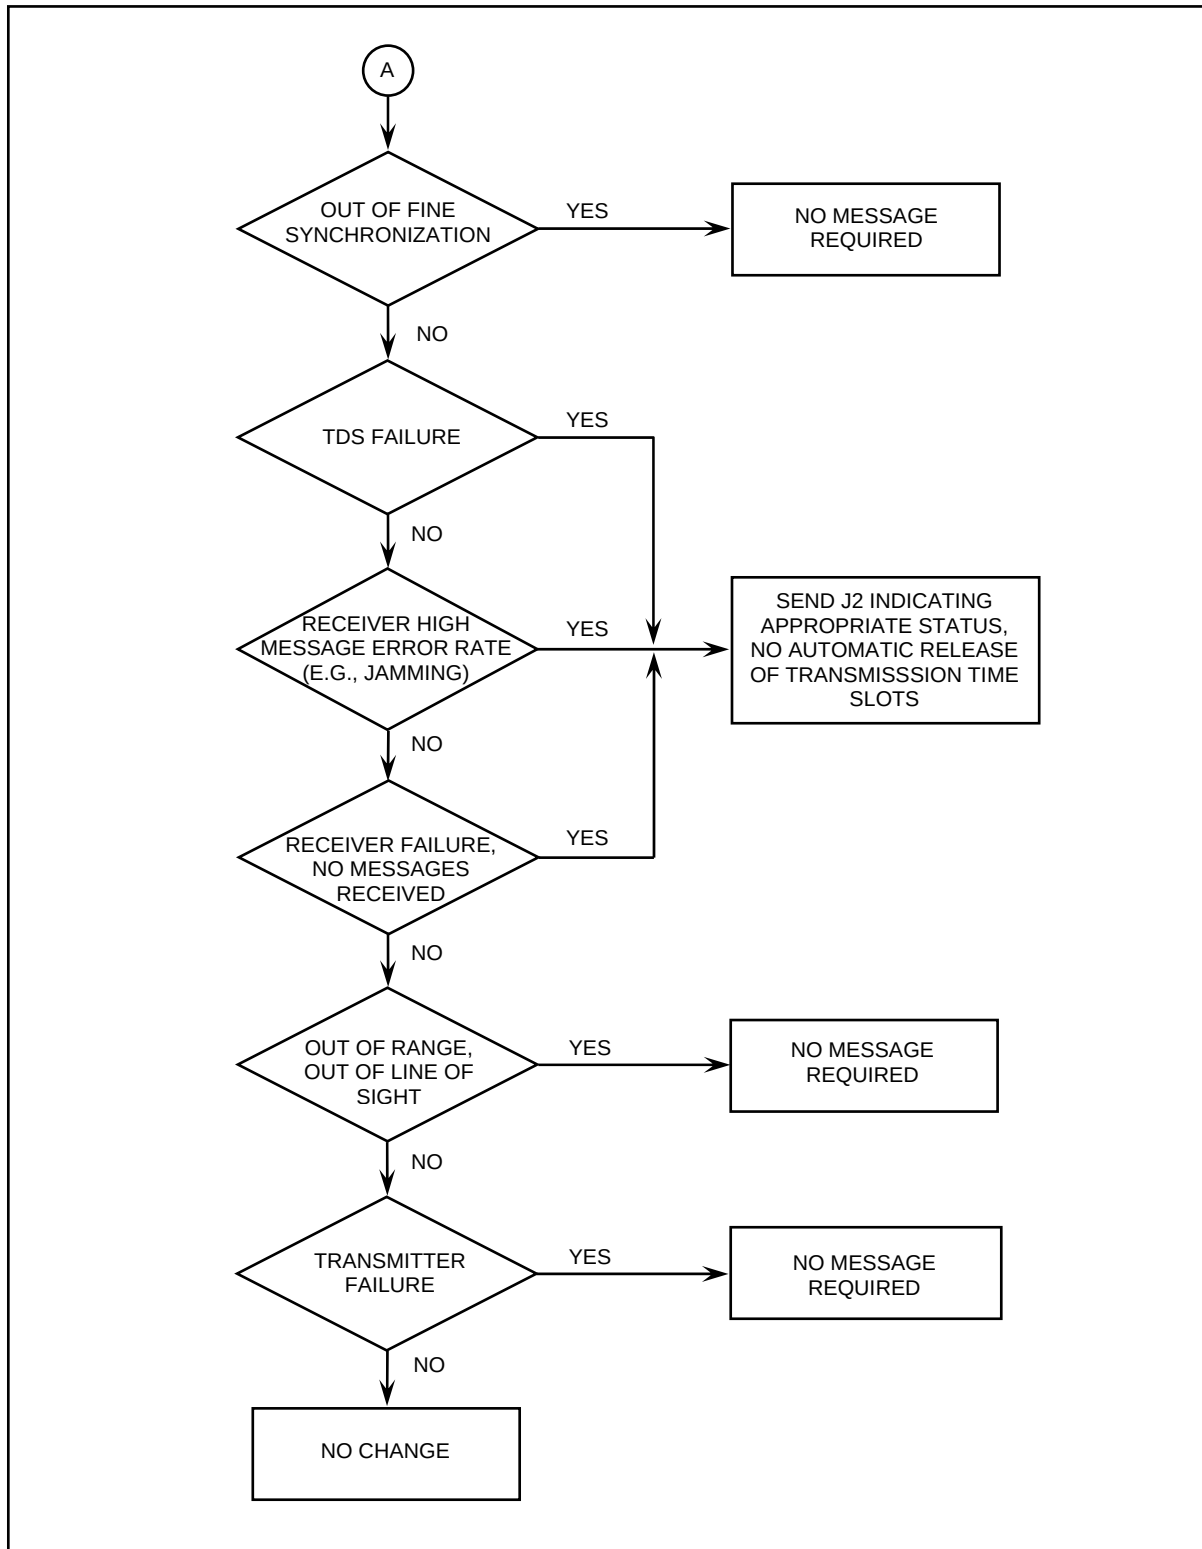


FIGURE 4.2-5. Flow Diagram of Network Participation Status Change to Limited Status (Sheet 2 of 2)

4.2.6.3.3 CRYPTOVARIABLE CHANGE

The cryptovvariable for each cryptonet will be changed periodically (every 24 hours) or in reaction to compromise situations. This change over must be coordinated by the Network Manager among all of the participants within the net.

4.2.6.3.4 OVER-THE-AIR REKEYING (OTAR)

OTAR provides dynamic rekeying capability to JUs. This flexibility is provided OTAR JUs by the J31.0 and J31.1 message types. The new cryptovvariable to be used by a JU is transmitted in message J31.1 and is protected by being uniquely encrypted by another cryptovvariable referred to as the unique cryptovvariable. The unique cryptovvariable is held only by the rekeying facility and the receiving JU. Other JUs in the same cryptonet can receive the J31.1 message but are not able to decipher the cryptovvariable portion of the J31.1 message. Each JU in a cryptonet has a unique cryptovvariable assigned for decrypting new cryptovvariables transmitted to that JU via the J31.1 message.

OTAR allows the Network Manager to change cryptoperiods and to dynamically change net connectivity for operational reasons or in reaction to a compromise situation.

The J31.0 message is used by the Network Manager to transmit an execution time and/or cryptovvariable synchronization bits to a receiving JU if required or by a JU to request a new cryptovvariable. The sequence and specific use of J31.0 and J31.1 message types is determined by the over-the-air action codes specified within the J31.0 and J31.1 messages.

4.2.6.4 MESSAGES USED IN SUPPORT OF NETWORK INITIALIZATION, ENTRY, MAINTENANCE, AND EXIT

The J0.0 message is used to achieve Coarse Synchronization.

The J0.2 message is used by the NTR to correct for drift of its clock relative to system time.

The J0.6 message is used to request time slot block assignments and to release time slot block assignments.

The RTT Interrogation and Reply messages are used to support the active achievement and maintenance of Fine Synchronization.

The J2 messages are used to support the passive achievement and maintenance of Fine Synchronization.

The J31 messages are used to support over-the-air rekeying.

4.2.6.5 TERMINAL TESTING

The terminal requires the receipt of a predetermined pattern of bits to perform internal, on-line circuit testing. The J0.1 message shall be transmitted when the terminal is operating in one of the test modes or upon receipt of a request for a J0.1 message when operating in the Normal or Polling mode. The J0.1 message consists of the J0.1I Test initial word, the J0.1E0 Test extension word, and the J0.1C21 Test continuation word. The bit pattern in the test message's extension and continuation words allows the terminal to check its bit processing circuit for both the 0 and 1 conditions of every bit in the 70 information bits. Parity bits are not checked. The J0.1 message pattern is used to check the number and location of error corrections in the Reed-Solomon decoder. This J0.1 message is also used in either of the test modes to flood the JTIDS/MIDS network with messages. In Test Mode 1, the JU transmits J0.1 messages in all time slots assigned for the Dedicated Access mode and in all time slots that would ordinarily be used for Contention Access except for Initial Entry time slots and RTT time slots. In Test Mode 2, the JU transmits J0.1 messages only in the Dedicated Access time slots, except for time slots in common blocks assigned to Control and Voice PGs, that are not used to transmit other messages.

4.2.7 CRYPTOGRAPHIC NETWORK DESCRIPTION, OPERATION, AND COMPROMISE

4.2.7.1 CRYPTONET FUNDAMENTALS

The purpose of the cryptonet structure is to maintain communications security while permitting the exchange and distribution of operationally required data

on a need-to-know basis. Individual cryptonets may contain one or more PGs based on operational data exchange requirements. The data exchange requirement is established by analysis of the following:

- a. Operational need of each participating JU for the overall data content of the net.
- b. Operational impact of compromise of the data content of the net.
- c. Vulnerability of the net to compromise either by capture of one of the participating JUs or by compromise of the network cryptovvariable by other means.

4.2.7.1.1 CRYPTONET PLAN

The communications plan identifies each cryptonet by its Cryptovvariable Logical Label (CVLL) (0 through 127) and its cryptovvariable short title. This data is used to prepare the mission load parameters for each participating JU and to provide instructions by which cryptovvariables will be loaded into the terminal. The mission load references the CVLL and the cryptoperiod designator codes to the Secure Data Unit (SDU) memory locations and defines the current cryptoperiod designator, while the instructions for cryptovvariable loading reference the cryptovvariable short title of the cryptovvariable going into these memory locations.

4.2.7.1.2 DYNAMIC/STATIC CRYPTONET PARTICIPATION

Most JUs can automatically shift cryptonets. The number of cryptonets used is based on authorization, terminal capability, and today/tomorrow operation. The Class 2 terminal can operate on up to eight cryptonets. The Class 1 terminal can operate in only one cryptonet unless manually changed.

4.2.7.1.3 CRYPTOVARIABLE DISTRIBUTION

Initially, the cryptovvariables will be supplied to the individual JUs as required in the communication plan using the present manual COMSEC material control system. This system is rigid, time consuming, vulnerable to Human Intelligence (HUMINT) exploitation, and limits the ability to reassign JUs

beyond their communication plan assignments. OTAR is planned for later use to enhance operational capability and responsiveness while reducing the HUMINT vulnerability.

4.2.7.2 CRYPTONET OPERATION

4.2.7.2.1 CRYPTONET INITIALIZATION, ENTRY, AND MAINTENANCE

In order for a JU to establish or operate on a secure data net it must first be provided with specific initialization data.

Required data consists of two parts. The first part deals with the technical characteristics of the assignment of specific time slot blocks to the PGCs. It is discussed in detail in Paragraph 4.2.6. The second part of this initialization data deals with the assignment of specific cryptovariables that the JU will require in order to conduct operations in designated secure nets. The Network Manager implements the communication plan by assigning JUs to JTIDS/MIDS Nets. The Cryptonet Manager will then assign cryptovariables to specific JUs based on their operational needs. With the implementation of OTAR, the Cryptonet Manager must also assign each individual JU with a unique cryptovariable required to process the OTAR messages.

The Cryptonet Manager must assign a specific cryptovariable to the Net Entry PG (Set A with ISN equal to 0 and RRN equal to 6). This net entry assignment is built into each Class 2 terminal and requires only the assignment of the required cryptovariable to initialize and enter the net.

Only the TRANSEC cryptovariable is required to initially enter or establish the net. Once coarse synchronization is achieved, the MSEC cryptovariable will be required to complete the process.

4.2.7.2.2 CRYPTONET PARTICIPANT ASSIGNMENT, AUTHORIZATION AND VALIDATION

Based on several factors, a JU is assigned to a single or multiple cryptonet by the Cryptonet Manager. The basic and most important consideration is the need for the JU to have access to the PGCs served by the cryptonets. The second consideration is the sensitivity of the data access that the JU

requires in order to complete the operational mission. All JUs operating together will require access to the large scale PPLI net and the Initial Entry net. Their assignment to other nets, however, will be based on their need for access to each of the cryptonets. The Initial Entry cryptonet and the PPLI cryptonet will normally utilize the same TRANSEC variable. These cryptonets, however, may be divided into separate cryptonets, or they may be subnetted using different MSEC variables to achieve separate cryptosubnets in order to reduce the number of JUs that participate on a single cryptonet.

The authority for assigning JUs to a cryptonet rests with the Cryptonet Manager.

4.2.7.3 CRYPTONET COMPROMISE

A cryptonet compromise is the loss or exposure of the cryptovariables being used by a net for communications security. Containment and prevention are the only protective measures against compromise. Containment means reducing the impact of compromise on operating cryptonets. Prevention includes the protective measures used to prevent the loss or exposure of cryptovariables during distribution and use.

Although several PGCs may use the same cryptonet, a compromise of any JU using any of these PGCs would compromise the data on all of the PGCs on that cryptonet. A degree of protection against compromise is provided by the implementation of different cryptonets, since different sets of messages are transmitted using different cryptovariables and only a subset of system information can be compromised when a single cryptonet is compromised.

4.2.7.3.1 IMPACT OF COMPROMISE

Compromise of a cryptonet can have serious consequences to the physical security (e.g., Targeting) of the JUs operating on that network as well as to the content of data passed on that net. Compromise may or may not be detected at the time of compromise. If a compromised unit remains completely passive, it may gain useful intelligence for the period that the cryptonet continues using the same cryptovariable. A compromised terminal can actively be used to defeat net management, relay, time reference, and other system services.

4.2.7.3.2. DETECTION OF A COMPROMISE

Detection of a compromise can be accomplished:

- a. By verification of an actual overrun or evidence of a penetration.
- b. If a JU requests access to a cryptonet that it should not be in.
- c. By any sudden disruptions resulting from jamming or any other loss of operational effectiveness.
- d. By the detection of data that is incorrect in style and/or content.
- e. By recognition of a false unit reporting on the PPLI net.

4.2.7.3.3 REACTION TO COMPROMISE

When the Cryptonet Manager suspects a compromise of a given JU, the Cryptonet Manager will isolate the given JU from other PGs on the cryptonet by changing cryptovvariable(s). With OTAR, the rekeying facility accomplishes this by sending the J31.1 message to the given JU. This should be followed by changing the cryptovvariable(s) of the remaining PGs on the cryptonet (via transmission of J31.1 messages) to a set of cryptovvariable(s) that differs from the cryptovvariable(s) of the compromised JU. If it is later verified that the suspected JU is not compromised, the JU can be returned to the cryptonet by the transmission of a J31.1 message. Without OTAR, the uncompromised JUs must be manually changed to a different cryptovvariable(s).

4.2.7.4 OVER-THE-AIR REKEYING

OTAR is an alternative means of cryptovvariable distribution. From the network management point of view, the particular means used for distribution of the cryptovvariables is usually unimportant in terms of structuring the network. However, there are important differences in Cryptonet Management and in resource utilization. Since a cryptovvariable can be loaded into the SDU by the terminal in response to an OTAR message, rekeying can be accomplished without direct physical access to the SDU. This provides the capability: (a) to issue new cryptovvariables in connection with dynamic

restructuring of the network, (b) to rapidly recover from compromise situations, and (c) to facilitate routine changing of cryptovariables without the use of rollover. In order to accomplish OTAR, two storage locations in the SDU must be reserved. One is for a unique cryptovariable and the other for temporary storage of the new cryptovariable while processing. This reduces the number of storage locations available for use by a JU. If OTAR is used for routine changing of cryptovariables instead of rollover, there is a gain in the number of cryptovariables which can be used during a given cryptoperiod.

OTAR requires assignment of communications capacity, including relay capacity, for the transmission of OTAR messages. The amount of capacity required is determined by the number of participants in each cryptonet and the time required for assigning cryptovariables. Once the time limits and number of participants have been determined, the capacity requirements can be calculated (See paragraph 4.2.1.2).

4.2.7.4.1 OVER-THE-AIR REKEYING SYSTEM PARTICIPANTS

OTAR system participants include the OTAR rekeying facility(ies) and remote JTIDS/MIDS Units.

a. The OTAR rekey facility shall include the System Controller, a rekey JU, and the KOK-11/TSEC. The System Controller interfaces with the KOK-11 to obtain new cryptovariables. It formats J31.0 and J31.1 OTAR messages and provides these messages to the rekey JU which transmits these messages to a remote JU. The rekey facility maintains a database of the cryptographic status of each JU operating under its control.

b. A remote JU is any unit capable of operating with OTAR.

4.2.7.4.2 OVER-THE-AIR REKEYING MESSAGES

The OTAR messages are J series messages used for the distribution of the cryptovariables. They consist of the J31.0 and J31.1 messages. The J0.6 message may be used in conjunction with the OTAR messages to dynamically control the use and assignment of cryptonets. The Network Management messages are discussed elsewhere in this section. The J31.1 message is used

as a rekeying message while the J31.0 message is used as a Change Cryptovvariable at Time Specified message, Packed OTAR message, Packed Over-the-MUX Rekeying (OTMR) message, Cryptovvariable Status Request message, Cryptovvariable Status Report message, Direct Cryptovvariable Request message, and Indirect Cryptovvariable Request message. In addition, Receipt/Compliance messages are required to indicate the status of received messages.

a. The J31.0 (ACT = 1) Change Cryptovvariable at Time Specified message is generated by the System Controller and is always used in conjunction with a J31.1 message, transmitted in a different time slot, to deliver a new cryptovvariable to a remote JU. Execution time is always other than immediate.

b. The J31.0 (ACT = 2) Cryptovvariable Status Report message is generated by a remote JU in response to a J31.0 (ACT = 5) message. It incorporates the cryptovvariable status of the queried JU.

c. The J31.0 (ACT = 3) Direct Cryptovvariable Request message is generated by a remote JU to request a new cryptovvariable.

d. The J31.0 (ACT = 4) Indirect Cryptovvariable Request message is generated by an authorized remote JU to request a new cryptovvariable for a remote JU other than itself.

e. The J31.0 (ACT = 5) Cryptovvariable Status Request message is generated by the System Controller to obtain the cryptovvariable status of a remote JU to enable the System Controller to generate a new cryptovvariable for that JU.

f. The J31.0 (ACT = 6) Packed OTAR message is generated by the System Controller and is used in the same time slot with a J31.1 (ACT = 6) message to deliver a cryptovvariable to a remote JU. Execution time is always other than immediate. The terminal will provide an R/C response to the J31.0 (ACT = 6) message, and in the same time slot will include the J31.1 (ACT = 6) message with values in each field of the J31.1 which are unchanged from those received.

g. The J31.0 (ACT = 7) Packed OTMR message is generated by the System Controller and is used in the same time slot with a J31.1 (ACT = 7) message to deliver a cryptovvariable to its own terminal. Execution time is always other than immediate. The terminal does not provide an R/C response to this message or to the subsequent J31.1 (ACT = 7) message.

h. The J31.1 message is generated by the System Controller. It conveys the data necessary to deliver a new cryptovvariable to a JU. The J31.1 can be used alone to rekey a remote JU but not to rekey the System Controller's own terminal. Further, it can be used alone to rekey a remote JU only if the new cryptovvariable is to be loaded immediately and the special condition defined in the T/R rules of the J31.1 message is satisfied.

i. The J31.0 and J31.1 messages use standard Receipt/Compliance procedures. However, an additional J31.1 Receipt/Compliance message is required to indicate successful or unsuccessful loading of the cryptovvariable. As noted above, the terminal provides an R/C response to the J31.0 (ACT = 6) Packed OTAR message, and in the same time slot includes the J31.1 (ACT = 6) message with values in each field of the J31.1 which are unchanged from those received. The terminal does not provide an R/C response for the J31.0 (ACT = 7) Packed OTMR message or for the J31.1 (ACT = 7) that follows it in the same time slot.

4.3 PRECISE PARTICIPANT LOCATION AND IDENTIFICATION

The PPLI function uses J2 PPLI messages to provide network participation status, identification, and position of JUs, PUs, and RUs on the Link 16 interface. The J2 messages also contain information on relative navigation that allows JUs to accurately determine their position. The J2.0 Indirect Interface Unit PPLI messages on PUs and RUs shall not be used for relative navigation computation.

The J2 messages shall be transmitted on the PPLI Network PG using the specified access mode and relayed using paired slot relay (conditional or unconditional) as assigned to participating platforms (see paragraph 4.2.3.10.4).

The PPLI function must be implemented by all JUs.

4.3.1 UNIT PARTICIPATION STATUS ON LINK 16

Each IU may need to know, on a dynamic basis, the participation status of any other units on the interface, i.e., JUs, PUs, or RUs. The J2 messages provide the means for exchanging participation status information on Link 16. The NPS IND shall be set appropriately as described in paragraph 4.2.6.3.

4.3.2 PARTICIPANT IDENTIFICATION

The identification of an IU is provided by the following information in the J2 messages:

- a. Environment/Category of an IU.
- b. Classification of the unit as a nonC² JU, C² JU, PU, or RU.
- c. Type of indirect IU.
- d. Identification Friend or Foe/Selective Identification Feature (IFF/SIF) information on the IU when available.

e. Platform and Platform Activity of the IU when available. Platform Activity will be that which is currently being conducted.

f. Strength of an IU.

g. Mission Commander status. Transmitted in the J2.2I word by a nonC² JU participating in an ASO mission, and assigned as Mission Commander.

4.3.2.1 ENVIRONMENT/CATEGORY OF AN INTERFACE UNIT

In the PPLI message, the environment/category of an IU is indicated by the message sublabel as follows:

a. Sublabel 0 - Indirect Interface Unit (Link 11/11B).

b. Sublabel 2 - Air.

c. Sublabel 3 - Surface (Maritime).

d. Sublabel 4 - Subsurface (Maritime).

e. Sublabel 5 - Land (Ground) Point.

f. Sublabel 6 - Land (Ground) Track.

4.3.2.2 CLASSIFICATION OF AN INTERFACE UNIT

The classification of an IU as either a nonC² JU or a C² JU is indicated by the C² indicator.

4.3.2.3 TYPE OF INDIRECT INTERFACE UNIT

For indirect interface units, the J2.0 message provides the Originator Environment/Category (Surface (Maritime), Subsurface (Maritime), Land (Ground) Air) type of site (PU, RU, FPU/FRU), and Unit Type (e.g., Tactical Air Operation Center (TAOC), Message Processing Center (MPC), Control and Reporting Center (CRC), etc.). The Source TN field in the Header word that

accompanies each J2.0 message will contain the TN associated with the forwarded unit.

4.3.2.4 TRANSPONDER DATA

For those IUs capable of responding to IFF/SIF interrogations, the applicable J2 IFF/SIF continuation word shall contain the same IFF/SIF modes and codes transmitted by the IU's transponder.

4.3.2.5 STRENGTH OF AN INTERFACE UNIT

The strength of an IU is provided in the Strength field, which indicates the number of similar units/objects (which could include other JTIDS/MIDS-equipped units not currently reporting their own PPLI) that are located with the reporting IU, including the reporting IU.

4.3.2.6 EXERCISE INDICATOR

In the PPLI message, the Exercise Indicator is used to provide the capability to distinguish IUs that are participating in an exercise from those with a nonexercise mission. When the Exercise Indicator field is set to value 1 in the J2 series PPLI message, it shall be interpreted to mean that all data concerning the IU must be considered artificial, for exercise purposes, except that the following data shall not be artificial:

- a. Track Number.
- b. Position and Movement: Latitude, Longitude, Altitude/Elevation/Depth, Course, Speed.
- c. Simulation Indicator.
- d. Network Management Data: All J0, J1, and J31 data, the J2.XI Active Relay Indicator and Network Participation Status Indicator, and the two Active Relay Indicators in the J2.X Mission Information continuation words.

e. RELNAV Data: RTT messages, all J2.XC3 data, and J2.XI RTT Reply Status Indicator, Time Quality, and Geodetic Position Quality.

f. Environment/Category: As expressed by the sublabel of the J2 series message.

g. Fuel Function, Fuel, Time Report Function, Minute and Hour in the J13.2 Air Platform and System Status message.

h. Flight Deck Status, Landing/Approach Condition, and associated Time Report Function, Minute and Hour, in the J13.3 Surface (Maritime) Platform and System Status message.

4.3.3 PARTICIPANT LOCATION

The location of all IUs and, if applicable, the altitude/elevation of the JTIDS/MIDS antenna shall be provided by geodetic coordinates in the J2 messages. If the unit is a JU, the location and altitude/elevation reported shall be that of the JTIDS/MIDS antenna. Additionally, mobile IUs shall report course and speed.

PU or RU locations are reported in J2.0 messages by FJUs.

The location of the JU's antenna is contained in that JU's J2 message in the extension word. This is normally the location of the JU. If the JU is not collocated with the antenna, the Displaced Position Indicator shall be set in that JU's J2 message and the applicable J2 Displaced Position continuation word shall indicate the JU's actual location.

The applicable J2 UTM/UPS Position continuation word shall be used by JUs appropriately equipped to transmit Universal Transverse Mercator (UTM)/Universal Polar Stereographic (UPS) grid coordinates. The geodetic position in the extension word may be used for Relative Navigation.

4.3.3.1 PPLI REPORTING BY JUs

Each JU shall transmit an appropriate J2 PPLI message on the PPLI Network PG, in the specified access mode, at least once per time interval. The time

interval is defined as the maximum time differential between PPLI reports that allows C² JUs to maintain other JUs with active status. The location of moving JUs shall be extrapolated to the time of transmission. To maintain an active status on a JU, at least one PPLI must be received every 40-60 seconds, or the JU will be considered inactive. In the latter case, C² JUs may delete the track or begin transmitting a surveillance track (based on own sensor data, or as a nonreal-time track). For surveillance purposes (see paragraph 4.4.2.2.1), J2.x messages shall be transmitted periodically in accordance with the appropriate J2.x message Transmit Rules.

4.3.3.2 PPLI REPORTING OF FORWARDED IUs

An FJU shall transmit a J2.0 message on the PPLI Network PG, using the specified access mode, at least once per time interval for each IU which is being forwarded. The time interval for the reporting of forwarded units shall be the same as specified in paragraph 4.3.3.1 above. The TN, Identity (ID), location, and amplifying information shall be identical to the latest information received from the forwarded unit on the other link. The location of moving forwarded units may be extrapolated to the time of transmission.

4.3.4 RELATIVE NAVIGATION

Relative Navigation is a terminal function that provides JUs with accurate position information within a common frame of reference. The function incorporates two basic coordinate systems, the standard geodetic system using latitude and longitude coordinates as defined by the WGS-84 Standard, and a relative rectilinear planar (U, V) grid tangent to the earth's surface at a selectable grid origin point. Accurate relative position data are developed in the U, V grid by the JTIDS/MIDS terminal. When two or more of these terminals have an accurate, independently derived knowledge of their geodetic position, the Relative Navigation function provides all terminals with accurate geodetic position.

A Beta Angle is computed by each JU participating in the Relative Navigation grid. Each JU's relative navigation algorithm shall determine its best estimate of the angular difference between the V axis of the grid and true north. This estimate will be based on the information presented to the

algorithm via received PPLI messages and the individual platform's navigation information provided to the algorithm. Each JU (including NCs and PRs) shall transmit its own estimate of Beta Angle in accordance with the T/R rules established.

4.3.4.1 ORGANIZATION

For purposes of operating the Relative Navigation function, the JTIDS/MIDS network consists of the following types of JUs forming an organizational hierarchy as follows:

- a. Network Time Reference.
- b. Position References.
- c. Navigation Controllers.
- d. Primary Users.
- e. Secondary Users.

Every JU implementing the Relative Navigation function is capable of operating as one or more of these types of elements.

4.3.4.1.1 NETWORK TIME REFERENCE

A single JU is designated to be the time reference for the network. The NTR serves as the basic reference for system time, as specified in the JTIDS/MIDS technical characteristics, Section 3, Terms and Definitions. The NTR may also be designated simultaneously as a PR and/or a NC.

4.3.4.1.2 POSITION REFERENCE

One or more JUs that maintain a geodetic position accuracy of 50 feet, 1 sigma, over long periods of time, including the NTR and the NC, may be designated as a PR. PRs may be fixed, ground based elements whose geodetic positions have been surveyed accurately; fixed or mobile surface or airborne elements that derive geodetic position accurately through independent

navigation systems, e.g., GPS and inertial navigation; or fixed elements that have determined geodetic position accurately after participating in the system for some period of time below the level of the PR and whose designation is changed manually to that of the PR. PRs are not essential to the operation of the Relative Navigation function. In the absence of PRs, the function continues to provide geodetic position based upon a weighted best fit computation of own unit's navigation system input, RELNAV TOA measurements, and remote unit's geodetic positions reported in PPLI messages. When a PR is present the computed Q_{pg} of own unit may have a higher quality than when there is no PR.

4.3.4.1.3 NAVIGATION CONTROLLER

To establish the relative grid coordinate system (U, V), at least one JU is designated as a NC. If the navigation controller is a moving JU, there may or may not be one other navigation controller either stationary or moving. If a stationary JU is selected as the navigation controller, one other stationary or moving JU that knows its distance accurately relative to the first JU must also be designated as a navigation controller. The NTR or a PR may be designated simultaneously as a NC. The NCs establish the origin of the relative U, V grid and the north orientation of the grid. If there is a single airborne NC, the north orientation of the grid is referenced to the dead reckoner of the NC. If there are two stationary NCs, the north orientation of the grid is determined by the relative positions of the two NCs.

4.3.4.1.4 PRIMARY AND SECONDARY USERS

All system JUs not assigned as the NTR, PRs, or NCs shall be either Primary or Secondary Users.

a. Primary Users use the Active mode to achieve and maintain fine synchronization as specified in the JTIDS/MIDS technical characteristics, Section 3, Terms and Definitions. Since this procedure requires transmission of RTT Interrogations, the particular JUs to be designated as Primary Users and the number of JUs so designated in the total environment must consider the availability of time slots to be used for this purpose. A JU cannot be designated as a Primary User if operating in the Radio Silence mode.

b. Secondary Users normally use the Passive mode to achieve synchronization as specified in the JTIDS/MIDS technical characteristics, Section 3, Terms and Definitions. However, this does not preclude the use of the Active mode under conditions of poor geometry.

4.3.4.2 CAPACITY

The subscriber capacity of the Relative Navigation function is unlimited. JUs determine position solely on the basis of the received position, the TOA information, and available dead reckoner inputs, as illustrated in Figure 4.3-1. RTT Interrogation by limited numbers of elements (PRs, NCs, and Primary Users) is acceptable; however, the use of RTT Interrogation is not a requirement for operation of the JTIDS/MIDS Relative Navigation function. Purely passive relative navigation, as well as initial network entry and synchronization, are possible.

4.3.4.3 POSITION ACCURACY

Position accuracy achieved through Relative Navigation is a complex function of measurement and computation of errors (source time and position errors), geometrical dilution of precision, and dead reckoner accuracy. Under optimum conditions, a JU is capable of position location to an accuracy of 100 feet root mean square.

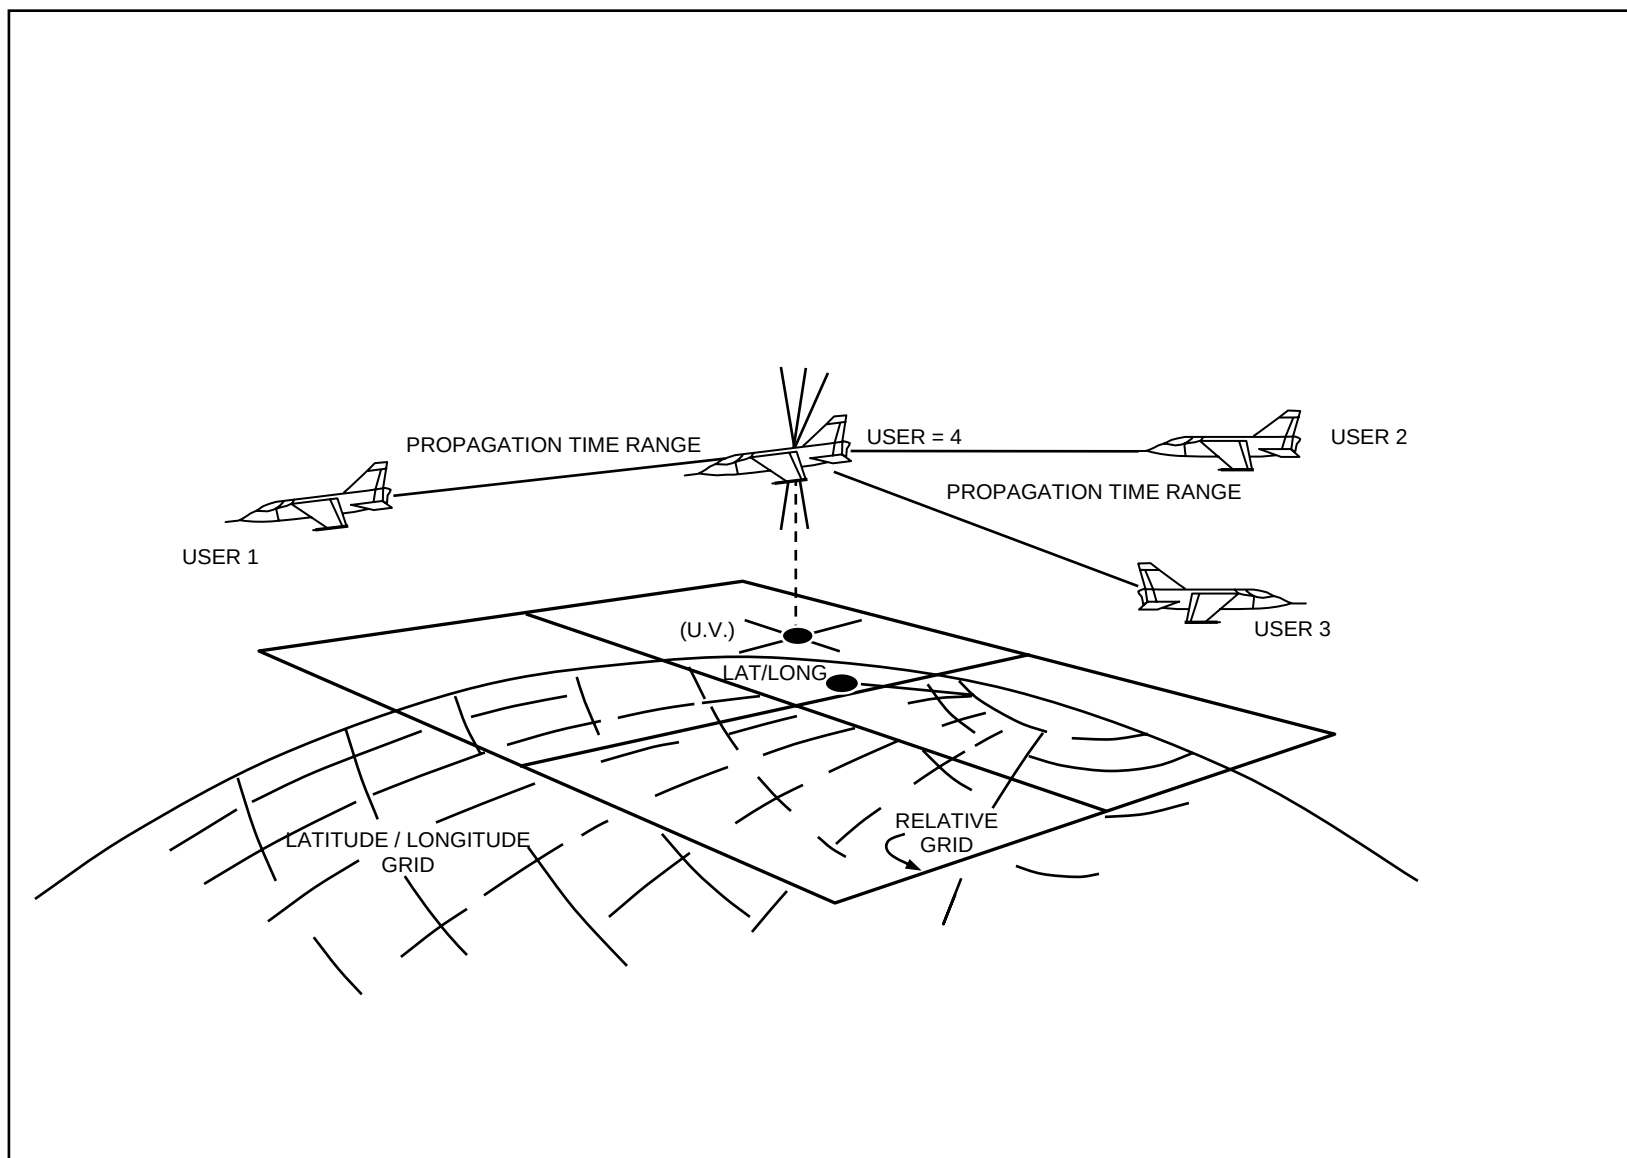


Figure 4.3-1. Position Location Using Time-of-Arrival Data

4.3.4.4 INPUT REQUIREMENTS

The Relative Navigation function performs all computations necessary for synchronizing and determining a JU's position and velocity using J2 and RTT messages received from the Link 16 interface and inputs from altimeter and dead reckoner equipment, e.g., barometric altimeter, inertial navigation systems, Doppler radar, attitude and heading reference, airspeed, and magnetic compass.

4.3.4.5 GRID ACQUISITION AND CONVERGENCE

It is possible for a terminal to begin Relative Navigation with an initial position estimate error of 25 nautical miles or less. With a 12-second J2 message reporting cycle by three sources providing good geometry, the time to converge to the accuracy specified in paragraph 4.3.4.3 is less than five minutes.

4.3.4.6 GEODETTIC REFERENCE

All geodetic computations use WGS-84 geoid parameters for equatorial radius (6,378,137 meters) and flattening (1/298.257223563). Coordinate conversions to WGS-84 from geodetic references that use other coordinate systems are as specified in the individual system segment specifications.

4.3.4.7 FUNCTIONAL ORGANIZATION

Control of source-user relationships is based on the estimated accuracy of synchronism and position derived within the filter algorithms of each terminal and reflected in the J2 messages by the four data fields denoted Time Quality (Q_t), Geodetic Position Quality (Q_{pg}), Relative Position Quality (Q_{pr}), and Relative Azimuth Quality (Q_{ar}). These fields indicate the terminal's accuracy in its latest estimate of system time and the accuracy of its estimate of position reported in that J2 message.

The NTR transmits a Q_t of 15 and does not adjust its local terminal clock. Any terminal, except those in the Conditional Radio Silence or Polling mode, is capable of operating as the NTR. PRs transmit a Q_{pg} of 15 and do not perform adjustments to their geodetic position on the basis of TOA

observations. NCs transmit a Q_{pr} set to value of 15, Q_{ar} set to value 7, and define the origin and orientation of the relative rectilinear planar (U, V) grid tangent to the grid at the origin and do not perform adjustments to relative grid position on the basis of TOA observations. The NC adjusts its geodetic position and velocity on the basis of messages received from terminals having higher values of Q_{pg} , including, but not limited to, PRs. Primary and Secondary User distinction is related to the methods of synchronization and associated source selection rules.

4.3.4.8 FINE SYNCHRONIZATION

Each terminal is capable of achieving Fine Synchronization by three modes designated Active RTT, Passive I and Passive II.

Initial Entry and Coarse Synchronization precede Fine Synchronization. Choice of the Active RTT, Passive I, or Passive II mode is determined by assignment of the JU as an NTR, PR, NC, Primary User, or Secondary User. In the Active RTT mode of synchronization, the interrogated unit responds with an RTT Reply containing the information required to allow the synchronizing unit to perform radio link time corrections. A continuing series of such RTT events is used to maintain clock offset, drift rate (frequency error), and estimated accuracy of synchronization. The Active RTT mode of synchronization is used exclusively by PRs, NCs and Primary Users and, under certain conditions, by Secondary Users.

In the Passive I mode of synchronization, the local clock offset and drift rate are computed by passive observations of the TOAs of J2 messages from other terminals. The Passive I mode of operation compensates for signal propagation time by computation of distance from the source J2 message and own unit positional data. The Passive I mode of operation requires a knowledge of own unit position independent of Relative Navigation and allows a terminal to achieve Fine Synchronization.

In the Passive II mode of synchronization the local clock offset and drift rate are computed from passive observations of a set of J2 message TOA values from geographically separated sources. The Passive II mode of synchronization shall not require prior knowledge of own unit position other

than an approximate initial estimate required to start recursive filter operations.

4.3.4.9 SOURCE SELECTION AND QUALITY FIELD VALUES

Each terminal determines and transmits in its J2 messages the following quality fields as defined in the JTIDS/MIDS characteristics, Section 3, Terms and Definitions.

- a. Time Quality.
- b. Geodetic Position Quality.
- c. Relative Position Quality.
- d. Relative Azimuth Quality.

The values of the quality fields transmitted in the terminal J2 messages are as a direct function of the variances computed by the recursive filter operations of the Relative Navigation function. The source selection criteria, observation weighting functions, filter gains and time constants, and own-unit quality setting computations are such that each navigating unit tends to advance in quality so as to operate on the minimum set of highest quality sources capable of supplying the geometrical requirements necessary to support own unit quality. Increases in variances caused by deterioration of geometry or loss of observations will cause a decrease in quality and subsequent selection of previously inferior sources to restore geometry and stability at a new, lower quality.

The source selection algorithms are fully automatic and adaptive, requiring no prior knowledge or preloading of source identities, and provide a hierarchical structure to prevent circulation (feedback) of errors. Units of inferior time or position accuracy do not degrade the accuracy of superior units. The source selection algorithms specified in the terminal are intended to define the maximum set of allowable sources. They are not intended to be sufficient to assure optimum performance in all platforms.

More restrictive criteria are used when necessary for the maintenance of performance in communities of units of divergent performance capabilities. If unable to process inputs from all sources acceptable under the basic source selection rule, e.g., through lack of computer program operating time, additional source selection logic may be used to choose a subset of those inputs. However, this additional logic does not result in time and position qualities inferior by more than one quality level to that obtainable by processing the best equal-sized subset. In addition to the quality-based source selection criteria, all terminals reject from relative navigation and synchronization processing all relayed and simulated messages. Relayed J2 messages, however, may be used for direct acquisition of the U, V grid origin.

4.3.4.9.1 NETWORK TIME REFERENCE

The JU designated as the NTR sets Q_t to value 15 and performs no radio link time corrections. The NTR, if not also a PR or NC, selects as sources for relative and geodetic updates those satisfying at least the following criteria. Letting sQ_t , sQ_{pr} and sQ_{pg} denote source qualities in received J2 messages, and Q_t , Q_{pr} and Q_{pg} denote own unit qualities, the first level selection criterion for relative filter update by ranging is the satisfaction of the following two conditions:

- a. sQ_t is greater than or equal to Q_{pr} .
- b. sQ_{pr} is greater than or equal to Q_{pg} .

Geodetic filter updates are made by either of two techniques, ranging or direct acquisition of grid origin data. Source data are processed for geodetic update by ranging only if the following three conditions are satisfied:

- a. sQ_{pg} is greater than or equal to Q_{pg} .
- b. sQ_t is greater than or equal to Q_{pg} .
- c. sQ_t is not equal to 0.

Sources for direct acquisition of grid origin data are selected only if either of the following sets of conditions is satisfied:

- a. sQ_{pg} is greater than Q_{pg} .
- b. sQ_{pr} is greater than Q_{pg} .
- c. Q_{pr} is greater than Q_{pg} .

Or

- d. sQ_{pr} is greater than Q_{pr} .
- e. sQ_{pg} is greater than Q_{pr} .
- f. Q_{pg} is greater than Q_{pr} .

Direct acquisition of the improved grid origin estimate is used to update geodetic position if Q_{pg} is less than Q_{pr} or to update relative position if Q_{pg} is greater than Q_{pr} . In either case, the inferior own unit position quality shall be set no greater than the least of the other three position qualities following the update.

4.3.4.9.2 POSITION REFERENCE

Units designated as PRs must have a geodetic position accuracy of less than or equal to 50 feet, set Q_{pg} to value 15 and do not make geodetic updates. PRs use the Active RTT mode of synchronization. RTT Interrogations are transmitted in the next available transmit opportunity following that time update cycle in which the computed time variance exceeds a threshold computed from the time quality of the best available time source. The time variance threshold is computed each update cycle from the following relationship or by the equivalent interpolation in Table 4.3-TBD.

$$\sigma_{2_{th}} = 5000 \cdot 2^{14 - (sQ_t - A)}$$

where:

$$\sigma_{2_{th}} = \text{threshold time variance}$$

${}_sQ_t$ = the highest time quality observed in any PPLI message received during the preceding time filter cycle time

A = 0.5, a variable parameter, (0.1-0.9, 0.1)

The RTT Interrogation is addressed to the source used in the threshold computation. Upon completion of clock update, time quality is determined as specified in the JTIDS/MIDS technical characteristics, Section 3, Terms and Definitions, for the updated value of time variance. In time filter cycles not requiring an RTT Interrogation, the time variance increases according to the filtering and estimation algorithm model of the expected clock error. Failure to receive an RTT Reply to three consecutive interrogations of the same source causes that source to be rejected from the threshold computation. In any event, no more than 10% of total assigned capacity is used for RTT Interrogations.

PRs may acquire grid origin information by direct acquisition from sources satisfying the selection criteria specified for the NTR in paragraph 4.3.4.9.1. For PRs, these criteria automatically result in updates to relative position and relative position quality only. Relative position update may also be derived from range measurements using the same source selection criteria specified for the NTR in paragraph 4.3.4.9.1.

4.3.4.9.3 NAVIGATION CONTROLLER

The NC sets Q_{pr} to value 15 and Q_{ar} to value 7 and performs no relative grid navigation computations from TOA observations. If not also the NTR, the NC synchronizes with RTT Interrogations using the same source selection, threshold and time quality logic specified for PRs in paragraph 4.3.4.9.2. Initially, the NC may arbitrarily specify the geodetic coordinates of the relative grid origin. The NC may refine the estimate of grid origin by either of two means of geodetic update. Geodetic update may be performed by ranging on other elements satisfying the following three source selection criteria:

- a. ${}_sQ_{pg}$ is greater than or equal to Q_{pg} .
- b. ${}_sQ_t$ is greater than or equal to Q_{pg} .

- c. sQ_t is not equal to 0.

Q_{pg} is updated each cycle in accordance with the quality and variance relationships as specified in the JTIDS technical characteristics, Section 3, Terms and Definitions. The NC is also capable of receiving improved grid origin estimates by direct acquisition from other units navigating in the relative grid. These sources are selected by the logic specified for the NTR in paragraph 4.3.4.9.1.

4.3.4.9.4 PRIMARY USERS

Primary Users synchronize by RTT using the same source selection and threshold logic as that specified for Position References in paragraph 4.3.4.9.2. Primary Users select for Relative Navigation ranging observations those sources that satisfy the following two conditions:

- a. sQ_t is greater than or equal to Q_{pr} .
- b. sQ_{pr} is greater than or equal to Q_{pr} .

Primary Users select sources for geodetic update using the same logic as the NC as specified in paragraph 4.3.4.9.3. Primary Users select sources for grid origin acquisition by the same criteria as those of the NTR, as specified in paragraph 4.3.4.9.1. Primary users compute and report own unit position qualities in the same manner as the NTR.

4.3.4.9.5 SECONDARY USERS

Secondary Users normally perform synchronization and Relative Navigation passively. Users operating in the Radio Silence mode shall automatically perform as Secondary Users; however, use of the passive modes of synchronization and Relative Navigation is not limited to the Radio Silence mode and is selectable at any time by operator entry.

Secondary Users select as sources for passive update of both time and relative position qualities JUs having better than own unit time and greater than own unit relative position qualities. Combined passive time and geodetic position updates are made only with J2 messages having better time

and greater geodetic position qualities greater than own unit. Selection of operation as a Secondary User does not, except when operating in the Radio Silence mode, preclude the use of RTT to augment the basic passive modes under conditions of poor geometry or for initial entry. Sources for position updates include only those having both time and position qualities greater than the lesser of own unit time or position quality.

As with Primary Users, the addressee of the RTT Interrogation shall be the unit of highest time quality. When in poor geometry, Secondary Users shall generate RTT Interrogations only as often as required to maintain own unit time variance as a negligible contribution to the position variance. RTT Interrogations by Secondary Users shall occur no more frequently than once per epoch. Secondary Users shall select sources for direct acquisition of grid origin by the same criteria as the NTR, as specified in paragraph 4.3.4.9.1.

4.3.4.9.6 TIME OF ARRIVAL ONLY

Mobile JUs having no dead reckoner inputs shall employ filter algorithms that are capable of determining relative position solely on the basis of TOA measurements and J2 messages from other JUs. They shall otherwise comply with paragraphs 4.3.4.9 and 4.3.4.9.1. The design of the terminal logic is such that the reported position quality reflects a conservative estimate of position accuracy.

4.3.4.10 RELATIVE NAVIGATION CORRECTION TO HOST SYSTEM

TBD.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

4.4 SURVEILLANCE

There is a requirement to exchange surveillance information on the Link 16 network. This section describes the exchange of surveillance information using fixed format messages.

C² JUs participating in the exchange of J3 Surveillance messages shall transmit surveillance information in Network PGs as defined in paragraph 4.2.3.10.5. NonC² JUs shall receive situational awareness information from the Surveillance NPG including track and Reference Point data necessary to support the platform mission. NonC² JUs shall not transmit on the Surveillance NPG. The following paragraphs specify the general rules and conventions necessary to satisfy the exchange requirements for surveillance data.

4.4.1 SURVEILLANCE DATA

Surveillance information includes the following data:

- a. Point surveillance data included in the J3.0 Reference Point message and the J3.1 Emergency Point message.
- b. Air and Surface (Maritime) surveillance data included in the J3.2 Air Track message and the J3.3 Surface (Maritime) Track message.
- c. Subsurface (Maritime) surveillance data included in the J3.4 Subsurface (Maritime) Track message.
- d. Land (Ground) surveillance data included in the J3.5 Land (Ground) Point/Track message.
- e. Space and Ballistic Missile surveillance data included in the J3.6 Space Track message.
- f. Electronic Warfare surveillance data included in the J3.7 EW Product Information message.

Surveillance information may be amplified by the following data:

- a. J5.4 Acoustic Bearing/Range Message.
- b. J6.0 Amplification message.
- c. J15.0 Threat Warning message.

The following Information Management data are also used to insure correct exchange of surveillance data:

- a. J7.0 Track Management (ACT = 0) Drop Track Report message.
- b. J7.0 Track Management (ACT = 1) Difference Report message.
- c. J7.0 Track Management (ACT = 2) Change Data Order message.
- d. J7.0 Track Management (ACT = 3) Emergency Status Change message.
- e. J7.0 Track Management (ACT = 4) Force Tell Status Change message.
- f. J7.0 Track Management (ACT = 5) Strength Change message.
- g. J7.0 Track Management (ACT = 6) Exercise Status Order message.
- h. J7.1 Data Update Request (ACT = 0) Data Update Request by Request Indicator message.
- i. J7.1 Data Update Request (ACT = 1) Data Update Request by Track Number message.
- j. J7.1 Data Update Request (ACT = 2) Ballistic Missile Update Request message.
- k. J7.2 Correlation message.
- l. J7.4 Track Identifier message.
- m. J7.5 IFF/SIF Management (ACT = 0) Clear IFF/SIF message.

- n. J7.5 IFF/SIF Management (ACT = 1) IFF/SIF Difference Report message.
- o. J7.5 IFF/SIF Management (ACT = 2) IFF/SIF Update Request message.
- p. J7.5 IFF/SIF Management (ACT = 3) Special Code message.
- q. J7.6 Filter Management (ACT = 0) Filter Implementation Request message.
- r. J7.6 Filter Management (ACT = 1) Filter Description Report message.
- s. J7.6 Filter Management (ACT = 2) Delete Filter Request/Report message.
- t. J7.7 Association (ACT = 0) Associate Data message.
- u. J7.7 Association (ACT = 1) Terminate Association message.

Paragraph 5.7.1 describes the requirement for initial transmission and explains the way message redundancy is specified. Each message contains the special rules required for the transmission and reception of that message.

The general rules and conventions common to the entire Surveillance function are defined in paragraph 4.4.2. Subsequent paragraphs describe the rules and conventions for reporting Point surveillance data (paragraph 4.4.3), Air, Surface (Maritime), and Land (Ground) surveillance data (paragraph 4.4.4), Subsurface (Maritime) surveillance data (paragraph 4.4.5), Space and Ballistic Missile surveillance data (paragraph 4.4.6), and EW surveillance data (paragraph 4.4.7).

4.4.2 GENERAL RULES AND CONVENTIONS

The general rules and conventions for reporting surveillance data are described in the following paragraphs.

4.4.2.1 IDENTITY

Standard identity is provided in terms of the following definitions:

- a. Pending - A track which has not been subjected to the identification process.
- b. Unknown - An evaluated track which has not been identified.
- c. Assumed Friend - A track which is assumed to be a friend because of its characteristics, behavior, or origin.
- d. Friend - A track belonging to a declared friendly nation.
- e. Neutral - A track whose characteristics, behavior, origin, or nationality indicate that it is neither supporting nor opposing friendly forces.
- f. Suspect - A track which is potentially hostile because of its characteristics, behavior, origin or nationality.
- g. Hostile - A track declared to belong to any opposing nation, party, group, or entity, which by virtue of its behavior or information collected on it such as characteristics, origin or nationality contributes to the threat to friendly forces.

These standard identity terms are further amplified by the Special Interest Indicator, Exercise Indicator and Identity Amplifying Descriptor, Specific Type, Platform, Platform Activity, and Identity Confidence fields.

4.4.2.1.1 EXERCISE TRACKS

There is a requirement to distinguish between live tracks that are involved in an exercise and other live tracks being reported. This is accomplished by setting the Exercise Indicator in the J3 track messages. Only tracks with standard identity of Friend can be modified by the exercise identity. When the Exercise Indicator is set to value 0, Non-Exercise Track, the standard identity of the track shall be specified in the Identity field. When the

Exercise Indicator is set to value 1, Exercise Track, the standard identity of the track shall be Friend and the exercise identity shall be specified in the Identity Amplifying Descriptor field. The Identity Amplifying Descriptor field shall not be set unless the Exercise Indicator field is set to value 1, Exercise Track. In particular, a track with the Exercise Indicator set to value 1, Exercise Track, and the Identity Amplifying Descriptor set to value 6, FAKER, shall be identified as a friendly track acting as a hostile for exercise purposes. Also, a track with the Exercise Indicator set to value 1, Exercise Track, and the Identity Amplifying Descriptor set to value 5, JOKER, shall be identified as a friendly track acting as a suspect for exercise purposes. For any track with Exercise Indicator set to value 1, Exercise Track, data concerning the track must be considered artificial, for exercise purposes, except that the following shall not be artificial:

- a. Track Number.
- b. Tracking Data: Latitude, Longitude, Altitude/Elevation/Depth, Course, Speed, Minute, Hour, and Track Quality.
- c. Simulation Indicator.
- d. Environment/Category.
- e. Status Data on Air Tracks: Fuel Function, Fuel, Time Report Function, Minute, and Hour.
- f. Status Data on Surface (Maritime) Tracks: Flight Deck Status, Landing/Approach Condition, and associated Time Report Function, Minute and Hour.

4.4.2.1.2 SPECIAL INTEREST TRACKS

A track's identity can be further amplified by designating it as a track of special interest. This is accomplished by setting the identity field as appropriate and by setting the special interest indicator. Examples of employment of this indicator are:

- a. Kilo/Yoke - A friendly track of special interest.

b. Zombie - A SUSPECT air track conforming to ATC rules or outside NATO airspace following a recognized traffic pattern.

c. Traveller - A SUSPECT surface track following a recognized traffic route.

4.4.2.1.3 PLATFORM AND PLATFORM ACTIVITY

The Platform and Platform Activity fields are Environment/Category dependent and serve to further amplify the identity of the reported track in specific terms, such as fighter, close air support.

4.4.2.1.4 IDENTITY CONFIDENCE

Identity Confidence (ID CON) criteria are yet to be determined (baseline to be determined by common agreement between Allied Nations).

4.4.2.1.5 SPECIFIC TYPE

Specific type is Environment/Category dependent and serves to further amplify platforms in each Environment/Category. Specific type is normally provided by status report from interface units or by intelligence amplification reports on surveillance tracks, or in the J3.2, J3.3, J3.4, J3.5, and J3.6 messages.

4.4.2.1.6 SHIPBORNE MISSILE SYSTEMS

The surface-to-air (SAM) and/or surface-to-surface (SSM) missile systems fitted in surface (maritime) units may be reported in the J3.3 Surface (Maritime) Track message or the J6.0 Amplification message.

4.4.2.2 REPORTING RESPONSIBILITY

Surveillance data reporting is initiated by the JU which first detects or initiates a track/point and makes it available for reporting on the interface. Each track/point initiated and reported shall be assigned a TN from the JU's allocated block. At that time, the JU shall have R² for the track/point. R² procedures for Air, Surface (Maritime), and Land (Ground)

surveillance tracks are discussed in paragraph 4.4.4.11. The general R^2 rules for points are discussed in paragraph 4.4.3.2, the R^2 rules for Ballistic Missile surveillance tracks are discussed in paragraph 4.4.6.15, and the R^2 rules for EW Surveillance are discussed in paragraph 4.4.7.2.

4.4.2.2.1 INTEGRATION OF PPLI REPORTS WITH SURVEILLANCE DATA

PPLI data available from J2 messages shall be used by C^2 JUs to reduce the redundancy of surveillance track reporting.

a. A surveillance JU will accept the PPLI information into its surveillance database and perform the applicable correlation and conflict processing necessary to ensure that duplicative information is not being transmitted on the Surveillance Network PG.

b. A C^2 JU participating on the Surveillance Network PG shall attempt to correlate received PPLI reports with data being received from local sensors. If a correlation is found with a track for which the C^2 JU has R^2 the J7.2 Correlation message shall be transmitted with the Response Value (RV) field set to value 1 (Reverse Correlation Not Acceptable), and with the Source TN in the Header word of the J2 PPLI message as the Retained TN and the surveillance TN as the Dropped TN. The C^2 JU shall cease reporting the track and transmit a J7.0 (ACT = 0) Drop Track message on the surveillance TN.

c. If a correlation is found with a track for which another C^2 JU has R^2 and the TNs are different, the J7.2 (RV = 1) Correlation message shall be transmitted, with the Source TN in the Header word of the J2 PPLI message as the Retained TN and the surveillance TN as the Dropped TN.

d. If a correlation is found with a track for which another C^2 JU has R^2 and the TNs are the same, the JU receiving the J2 shall accept the PPLI information into its surveillance database and shall disregard the J3 surveillance data on the specified track except when Geodetic Position Quality in the PPLI message is set to value 0, in which case the surveillance track is accepted and the PPLI message shall be discarded.

e. Subsurface tracks shall not be correlated with IUs.

f. If a correlation is not found, the C² JU shall integrate the received J2 PPLI report into its surveillance database as part of the surveillance picture. If J2 messages are not received subsequent to this action and the receiving C² JU still has no local data, the C² JU assumes no responsibility for reporting the subject JU on the Surveillance Network PG.

g. If the position or other data in a PPLI meet a system's decorrelation criteria, the PPLI and local track data shall be decorrelated. After decorrelation, the C² JU shall initiate a surveillance track report with locally held data using a new track number. The PPLI Track Number and Identity Indicator field and the PPLI IFF/SIF Indicator field shall both be reported as No Statement.

4.4.2.2.2 REPORTING OF INACTIVE AND LIMITED STATUS INTERFACE UNITS

A C² JU shall assume R² of an IU (including C² and nonC² JUs and forwarded PUs and RUs) in accordance with the reporting rules for a real-time track if the C² JU has correlated local sensor data, when:

- a. A J2 PPLI message is not received for 40 to 60 seconds, or
- b. A J2 PPLI message, other than J2.0, is received with the NPS Indicator set to Inactive or Conditional Radio Silence, or
- c. A J7.0 (ACT = 0) Drop Track message is received from the FJU for a PU, RU, or other IU, or
- d. The Geodetic Position Quality in the J2 PPLI message is set to value 0.

A C² JU assuming R² of an IU reports it as a track or point on the Surveillance Network PG. The type of surveillance message will depend upon the Environment/Category of the IU being reported. The Identity shall be reported as Friend. The Track Number, Platform and Platform Activity values received in previous PPLI messages shall be reported. The PPLI Track Number and Identity Indicator shall be reported as value 1, and shall be maintained if another C² JU assumes R² of the IU.

The PPLI Track Number and Identity Indicator, when set to value 1, serves several useful purposes. For example, in addition to the uses defined in Paragraph 4.7, it may displayed to operators to give an extra measure of confidence in the track identification data being reported.

The most current IFF/SIF data shall be reported. If all IFF/SIF nonzero mode codes were obtained from or are the same as the codes received in the J2 message for the subject TN, the PPLI IFF/SIF Indicator in the J3 message shall be reported as value 2. Otherwise, if the Mode II code was obtained from or is the same as the Mode II code received in the J2 message, the PPLI IFF/SIF Indicator shall be reported as value 1. Otherwise, the PPLI IFF/SIF Indicator shall be reported as value 0. The Mode IV Indicator value reported shall be based on actual responses received and shall not be based on the fact that the TN was previously received in a PPLI message.

If locally derived IFF/SIF data differs from IFF/SIF data that was being reported in the PPLI message, the locally derived data shall be reported.

4.4.2.3 SIMULATED TRACKS

There is also a requirement for a capability to indicate that a surveillance track is not derived from any sensor data but is a simulated track being provided solely for training or test. This is accomplished by setting the Simulation Indicator in the appropriate J3 message as well as in the J2 message when applicable. JUs have the option of implementing simulated tracks. JUs also have the option of filtering simulated tracks. The Simulation Indicator in the J2 and J3 messages shall be set on all simulated tracks when both live and simulated tracks are simultaneously being exchanged on the interface. Simulated tracks may be originated from simulated video mixed with live video, from message input provided by previously recorded or generated messages, or from a TDS's internal simulation program. When the Simulation Indicator is set in a J2 or J3 message, all data associated with that track are simulated and should not be associated with a live track. Simulated tracks will not be correlated with live tracks. Prior coordination with all interface participants is required when transmitting simulated tracks on the interface to insure that simulated tracks are not assigned TNs from other systems' TN blocks. If a system displays both simulated and live tracks simultaneously, the tracks should be readily distinguishable from each

other. The Simulation Indicator shall not change. If for any reason, such as operator error, it is desired to change the simulation status of a track, the track shall be dropped using the J7.0 (ACT = 0) message, and a new track shall be reported. The one exception to this rule is that a change from live to simulated shall be accepted if the track is being received from an FJU.

4.4.2.4 SPECIAL PROCESSING AND HANDLING OF SURVEILLANCE DATA

Special processing of surveillance data may be required in accordance with paragraph 4.1.6.

4.4.2.5 TRACK ALERTS

Track alerts consist of force tell and emergency alerts. Force Tell and Emergency Indicators are provided in the J3 messages to indicate force tell and/or emergency conditions. These indicators, when set, allow these messages to override all operator controllable data filters. A system with a limited track capacity (e.g., F-15) should manage its database to insure that it shall not be saturated by force tell and emergency alerts. These indicators are set and cleared as specified in paragraph 4.7.1.4.

4.4.2.6 PURGING

A JU may have the capability to purge remote tracks/points, i.e., automatically drop a remote track/point after a specified time interval has elapsed since the track's/point's last report. The JU shall not transmit a J7.0 (ACT = 0) message on a purged remote track/point. See paragraph 4.4.3.7 Purging of Reference and Land (Ground) Points, paragraph 4.4.3.8 Purging of Emergency Points, paragraph 4.4.4.13.2 Purging of Remote Tracks for additional information on purging of points and tracks, and paragraph 4.4.7.6 Termination of Electronic Warfare Surveillance Data, which explains purging of EW product information.

4.4.2.7 RULES FOR "NO STATEMENT" AND "RESET TO NO STATEMENT" VALUES

Various fields in the J-series messages contain both No Statement and Reset to No Statement values. No Statement means the report includes no data for that field. It implies nothing about the validity of previously reported

non-No Statement data for that field. The Reset value provides a means to specifically declare that the currently reported value is incorrect, but the correct specific value has not been ascertained. The following rules apply:

a. When a JU implements the No Statement value and at least one other defined value for a field that has a Reset to No Statement value, the Reset to No Statement value must also be implemented.

b. A message reporting the Reset to No Statement value shall be transmitted one time.

c. When a system receives a No Statement value for a field which has a Reset to No Statement value and for which a value other than No Statement is locally held, the locally held value shall be retained regardless of whether it was locally or remotely derived.

d. When a system receives a Reset to No Statement value, it shall automatically revert the locally held value of that field to No Statement.

e. The Reset to No Statement value may be originated automatically or by operator action.

f. Paragraph 4.6.2 contains amplifying rules for use of the Reset to No Statement value in the J6.0 Amplification message.

4.4.2.8 TRACK NUMBER CONTINUITY

A particular surveillance entity may be eligible to retain its original Track Number on change of report type, Table 4.7-1 specifies those cases when the same TN is to be retained and those when a new TN is to be assigned. In cases when a new TN is required, the JU with R² shall transmit a Drop Track Report on the old TN.

4.4.3 POINT SURVEILLANCE DATA

Point surveillance data are exchanged as follows:

a. J3.0 - Used to exchange tactical information about geographic references. (Nonphysical points such as waypoints, Combat Air Patrol (CAP) stations, Forward Edge of the Battle Area (FEBA), etc.)

b. J3.1 - Used to report the existence of an emergency condition that requires search and rescue efforts.

c. J3.5 - Used to report the location of fixed ground units or objects. (Physical points such as troop concentrations, bridges, airbases, etc.)

4.4.3.1 POINT, LINE, AND AREA REPORTING

The J3.0 Reference Point, J3.1 Emergency Point, and the J3.5 Land (Ground) Point/Track messages are used to report points, e.g., waypoints, downed aircraft, SAM sites, etc. Each point, line, or area reported on the interface shall be assigned a TN(s) by the reporting JU, and the position shall be reported using geodetic latitude/longitude values. Also, the J3.0 and J3.5 messages provide the capability to report the altitude/elevation of the point, line, or area if required. The capability to report the time associated with a reported point, line, or area is provided in all three point messages. Time is reported in hours/minutes, and the time meaning is defined by the Time Function field. The J3.5 message also provides the capability to describe a circle/ellipse about a ground point. This would normally be used in reporting a SAM site, but could be used with any J3.5 point. In addition to reporting points, the capability is provided for the J3.0 message to transmit lines such as FEBAs, roads, etc.; areas such as search areas, exercise areas, etc.; and volumes such as corridors, etc. Protocols for use of the time and Time Function fields for moving points, lines, and areas are contained in paragraph 4.4.3.1.3.

The J3.0 message word sequences required for support of various point type values are provided in the ASW point reporting procedures and associated message T/R rules (see paragraph 4.4.5.2.3).

It is a system option to retain the TN and last reported position of a fixed land (ground) IU that has reverted to an inactive status. If the point is

required for tactical situation reporting, the JU shall transmit a J3.5 message on the IU, using the assigned address of the inactive IU.

There is no interface track-to-point or point-to-point correlation and the J7.2 message shall not be used to correlate one track/point with any other point. The J7.7 message shall be used to indicate any association between a track/point and another track/point.

It is illegal to change a reference or emergency point to any other type of surveillance entity; i.e., the Reference TN used to identify a particular reference or emergency point shall not be used for any other type of entity reported on the interface except in the normal course of TN reuse. Moreover, it is illegal to change the Point Type and/or Point Amplification value of a reference point while retaining the same Reference TN. As an exception to this rule a Point Amplification value of No Statement may be changed to a non-No Statement value and retain the same Reference TN.

Emergency points are transmitted as J3.1 messages. Emergency points may be related to a previously reported track/point. In these cases the J3.1 message shall contain, as amplifying information, the TN, Previously Reported that is associated with the emergency point. The emergency point shall have a TN, Reference different from the TN, Previously Reported. When the Exercise Indicator is set to value 1 in the J3.1 message, the report is for exercise purposes and is not an actual emergency.

When the J3.0 message is used to report a point, the Point/Line/Area Descriptor, 1 field shall be set to value 0, Point, in the initial word.

4.4.3.1.1 ALTITUDE REPORTING

When altitude is specified, Altitude, 100 Ft 1 and, if appropriate Altitude, 100 Ft 2, shall be reported in each J3.0E0 word transmitted. If only one altitude is to be reported, the Altitude, 100 Ft 1 shall be used and Altitude, 100 Ft 2 shall be set to value 1023, No Statement. When only one altitude is provided it is a designated altitude and not at or below and not at or above. An altitude range is reported with both Altitude, 100 Ft 1 and Altitude, 100 Ft 2. For example, if the altitude to be reported is at or

below 10,000 feet, then Altitude, 100 Ft 1 is set to value 0, 0 Altitude and Altitude, 100 Ft 2 is set to value 100, 10,000 Feet. If the altitude to be reported is at or above 20,000 feet, then Altitude, 100 Ft 1 is set to value 200, 20,000 Feet and Altitude, 100 Ft 2 is set to value 1022, 102,200 Feet (the maximum setting). Altitudes and altitude ranges apply only to a single word sequence, i.e., a single track number. This is to allow different altitudes to be applied to different segments of the same line.

4.4.3.1.2 LINES AND AREAS

The J3.0 message provides for the description of segmented lines, multisided areas, squares, rectangles, circles, or ellipses. Volumes are obtained by including maximum and minimum altitude values when describing multisided areas, squares, rectangles, circles, or ellipses in the J3.0 message.

a. Segmented Line and Multisided Area Definition. A single J3.0 message is used to define a segmented line with either 2 or 3 points. Multiple J3.0 messages, each with a unique TN, are used to define segmented lines or multisided areas described by more than 3 points. In either case a J3.0I/J3.0E0/J3.0C1 word sequence is used for each message. A J3.0C2 word is added to the first message if the line or area is moving.

(1) When 2 or 3 points are joined together to form a segmented line, the following conditions are used:

(a) The Line/Area Continuation Indicator is set to No Statement in the initial word of the word sequence.

(b) The End Point field associated with the appropriate coordinates described by one of the two sets of Delta Latitude/Delta Longitude fields of the continuation word is set to value 1, End Point.

(c) The Point/Line/Area Descriptor, 1 field is set to value 2, Line, in the initial word.

(d) The designated reference point from which Delta Latitude 1, Delta Longitude 1, Delta Latitude 2, and Delta Longitude 2 are

measured is that given by the Latitude and Longitude fields in the J3.0E0 word.

(2) When more than 3 points are joined together to form a segmented line or a multisided area, the following conditions are used:

(a) The second and all subsequent messages transmitted have the Line/Area Continuation Indicator in the initial word set to value 1, Line/Area Continuation.

(b) The point location described in the extension word of the second and all subsequent messages must be the same point location as the last point location described in the previous message. This assures a receiving unit that it, in fact, received all messages and did not miss a transmission.

(c) The appropriate end point field in the continuation word will be set to value 1 to indicate the associated point is the last point to be transmitted.

(d) When describing a multisided area, the last point location transmitted must be the same location as the initial point transmitted in the first word sequence. This, in effect, closes the figure to form an area.

(e) The designated reference point from which Delta Latitude 1, Delta Longitude 1, Delta Latitude 2, and Delta Longitude 2 are measured is that given by the Latitude and Longitude fields in the J3.0E0 word.

(f) When joining three or more points to form a segmented line, the points are first plotted as specified above, then the segments are connected in sequence, i.e., the first segment is drawn from the point described in the Latitude and Longitude fields in the J3.0E0 word, to the point established by the Delta Latitude, 1 and Delta Longitude, 1 fields in the J3.0C1 word. The second segment is drawn between the point established by the Delta Latitude, 1 and Delta Longitude, 1 fields to that established by

the Delta Latitude, 2 and Delta Longitude, 2 fields. This process is repeated to connect multiple segments.

(g) To prevent confusion and possible misunderstanding, any change to data concerning any point comprising a portion of a segmented line or multisided area, shall cause the entire line or area to be transmitted by the reporting JU. Receiving units shall purge the previously held segmented line or multisided area and replace it with the new report.

(h) The TNs used to initiate the segmented line or multisided area shall be transmitted for every report of the segmented line or multisided area, including a change of R^2 .

(i) The Reference TN of the first J3.0 message with Line/Area Continuation Indicator set to value 0 shall be used as the only legal identifier for all subsequent references to the segmented line or multisided area, except when dropping the line or area (refer to paragraph 4.4.3.6), setting/clearing the Force Tell Indicator (refer to paragraph 4.7.1.4.3), or responding to a Data Update Request by TN (refer to paragraph 4.7.2.1.1).

(j) The Point/Line/Area Descriptor, 1 field in the initial word shall be set to value 2, Line, when describing a segmented line and shall be set to value 3, Multi-point Area, when describing a multisided area.

b. Square, Rectangle, Circles and Ellipse Definition. When defining an area that is a square, rectangle, circle, or ellipse a J3.0I/J3.0E0/J3.0C2, J3.5I/J3.5E0/J3.5C3, or a J3.7I/J3.7C1/J3.7C2 word sequence is used. The Point/Line/Area Descriptor, 1 field in the J3.0I word shall be set to value 1, Single Point Area. The Square/Circle Switch field indicates that either a square or rectangle is being described when set to value 1 or indicates either a circle or ellipse is being described when set to value 2. A square or circle is being described, depending on the value of the Square/Circle Switch, when the Area Major Axis and Area Minor Axis fields are equal. When the axes are not equal, a rectangle or ellipse is described, depending on the value of the Square/Circle Switch. The orientation of the major axis with respect to True North is provided by the Axis Orientation Field.

When defining EW AOPs (refer to paragraph 4.4.7.1.3) the J3.7I/J3.7C1/J3.7C2 word sequence, as a minimum, is used. The same procedures described above are used to define AOPs.

c. Corridor and Low Level Transit Route (LLTR) Definition. Corridors are reported using Point Type value 4, Line and Point Amplification value 3, Corridor. LLTRs are reported using Point Type value 4, Line and Point Amplification value 6, Low Level Transit Route. Both of these lines are center lines and may be single or segmented with altitude(s) associated with each segment. Width is reported in the Area Major Axis, 4 field in the J3.0C5 word. All other fields in the J3.0C5 word shall be set to No Statement.

4.4.3.1.3 SLAVED POINTS AND AREAS

a. Certain reference points and areas may be slaved in a constant position in relation to a Related TN. The position of a slaved point or area is established as Delta Latitude, 1/Delta Longitude, 1 from the Related TN at the time of the report when the Slaved Indicator is set to value 1. This establishes the constant true or relative bearing and range of the slaved point or area from the Related TN. The absence or presence of the J3.0C4 word indicates whether slaving is on a true or relative bearing, as described in paragraph 4.4.3.1.2e below. If the J3.0E0 word is included in a report of a slaved point or area, Latitude, 0.0103 Minute and Longitude, 0.0103 Minute shall be set to No Statement. An example of a slaved point is a marshall point used during aircraft recovery operations aboard an aircraft carrier.

b. When a square or rectangle (Square/Circle Switch = 1) or a circle or ellipse (Square/Circle Switch = 2) is slaved, the position established by the Delta Latitude, 1/Delta Longitude, 1 is the center of that area.

c. Lines and irregular multisided areas, i.e. other than squares, rectangles, circles, and ellipses, shall not be slaved.

d. The slaved point or area center is plotted as the difference in Latitude and Longitude from the position of Related TN at the time of the report, regardless of whether slaved true or relative, and regardless of the course of Related TN. If slaved true, the constant true bearing is then

determined as the azimuth between True North and the position of the slaved point or area center, measured clockwise from the position of Related TN. If slaved relative, the constant relative bearing is determined as the angle between the course of Related TN and the position of the slaved point or area center, measured clockwise from the position of Related TN. For relative slaving, the azimuth (true bearing) of the point or area center from the Related TN changes by an amount identical to any reported change of course of the Related TN subsequent to receipt of the slaved point or area message. For slaved ellipses, squares, and rectangles, the Axis Orientation shall also change by an amount identical to the course change of Related TN (-180 degrees if the Axis Orientation exceeds 179 degrees).

e. The absence or presence of the J3.0C4 continuation word indicates whether a point or area center reported in a J3.0 message with Slaved Indicator = 1 is slaved by true or relative bearing to the Related TN. For both true and relative slaving, the range between the slaved point or area center and Related TN remains constant. If the J3.0C4 word is not included, the bearing established by Delta Latitude, 1/Delta Longitude, 1 is a constant true bearing from the J3.0C2 Related TN. If the J3.0C4 word is included, the bearing is relative to the course of the J3.0C4 Related 1 TN. When the J3.0C4 word is transmitted, either the J3.0C2 Related TN field shall be set to No Statement for a slaved area, or the J3.0C2 word shall not be transmitted for a slaved point.

f. ASW Areas of Probability (AOP) reported in a J3.0 message with Point Type = 7 and Point Amplification = 12 shall not be slaved. To relate or associate an ASW AOP to a track or point, e.g., a subsurface track for which contact has been lost, a J7.7 Association message may be transmitted.

4.4.3.1.4 NONSLAVED MOVING POINTS, LINES, AND AREAS

The rules for nonslaved moving points, lines, and areas are provided as follows:

a. Moving points, lines, and areas are reported by setting Course and Speed in the J3.0C2 word to other than No Statement. Moving points, lines, and areas shall be extrapolated by the host to the time of transfer to the terminal. Time (Hour and Minute) and Time Function may also be reported as

amplifying information, independent of the reported position, Course, and Speed. If time is reported as other than No Statement, Time Function shall also be other than No Statement. The Axis Orientation field is not affected by changes in Course.

b. A point, line, or area shall not be reported as moving if it has an Activation Time in the future, i.e., if Time Function = Activation Time and the Time has not yet arrived, Course and Speed shall be set to No Statement. To cause a point, line, or area to commence moving at the Activation Time, Course, and Speed may be reported commencing at Activation Time.

c. Position and Intended Movement (PIM) and Submarine Position and Intended Movement (SIM) points (Point Type = 1, Point Amplification = 4 and 9, respectively) which are not yet active are exceptions to the above rules. Such future PIM and SIM points shall be reported with the position, Course, and Speed that will be effective at the Activation Time.

d. Land (Ground) Points shall not move, i.e., Course and Speed shall be set to No Statement in a J3.5 (PTI = 0) message. The J3.5 (PTI = 0) Track Quality field shall be set to 0. Course, Speed, and Track Quality shall not be processed upon receipt of a J3.5 (PTI = 0) message.

4.4.3.2 REPORTING RESPONSIBILITY FOR POINTS, LINES, AND AREAS

The following subparagraphs amplify the general R^2 rules specified in paragraph 4.4.2.2. Both the general rules and the amplification of those rules for points, lines, and areas, detailed below, shall be followed.

4.4.3.2.1 REPORTING RESPONSIBILITY FOR REFERENCE POINTS, LINES, AND AREAS AND GROUND POINTS

The originator of a J3.0 or J3.5 (PTI = 0) point, line, or area retains R^2 as long as the originator remains active and reports the point, line, or area. However, if a J7.0 (ACT = 0) message is received, the R^2 unit is declared inactive, or if no periodic update is received for three consecutive update intervals, another JU may, by operator action only, assume R^2 for the point, line, or area using the same Reference TN(s). The latest IU to report on a reference or land (ground) point, line, or area has R^2 for the point, line, or

area. If a JU without R^2 desires that a specific point, line, or area be transmitted immediately without awaiting the next periodic update, it should transmit a J7.1 (ACT = 1) Data Update Request for the desired TN.

4.4.3.2.2 REPORTING RESPONSIBILITY FOR EMERGENCY POINTS

Any JU may report, through operator action only, on a previously reported emergency point when that JU has additional or more current information on the point. In addition, if a J7.0 (ACT = 0) message is received on an emergency point, the unit with R^2 is declared inactive, or if no periodic update is received for three consecutive update intervals, another JU may, by operator action only, assume R^2 for the point. A JU assuming R^2 for an emergency point shall use the same TN Reference and the same value of TN Previously Reported as those reported by the previous reporting unit. The latest JU to report a point has R^2 for that point.

4.4.3.3 DATA UPDATE REQUESTS FOR POINTS, LINES, AND AREAS

Paragraphs 4.7.2 through 4.7.2.3 provide information on Data Update Requests for points, lines, and areas.

4.4.3.4 TRACK ALERTS FOR POINTS, LINES, AND AREAS

Paragraphs 4.7.1.4.3, 4.7.1.4.4, and 4.7.1.4.6 provide information on track alerts for Reference Points, Emergency Points, and Land (Ground) Points, respectively.

4.4.3.5 REPORTING TRANSPONDER DATA ON POINTS

IFF/SIF data (Modes I, II, and III Codes) are transmitted in the J3.1 and J3.5 (PTI = 0) messages when available. The IFF/SIF data in the J3.1 message shall contain the IFF/SIF modes and codes of the previously reported track for which the emergency point was initiated.

4.4.3.6 TERMINATION OF A POINT, LINE, OR AREA

When a JU ceases reporting a point, line, or area for which it had reporting responsibility, it shall transmit a J7.0 (ACT = 0) message. To drop a

segmented line or multisided area defined by more than one Reference TN, a J7.0 (ACT = 0) message shall be transmitted for each Reference TN.

A JU shall not transmit a J7.0 (ACT = 0) message on a point when the point becomes an Active IU on the interface with the same TN.

A JU receiving a J7.0 (ACT = 0) message on a point, line, or area shall not be required to purge the point, line, or area. However, if the JU does not purge a point, line, or area on which it has received a J7.0 (ACT = 0) message, it shall assume R^2 for the point, line, or area to ensure that it remains active on the interface.

4.4.3.7 PURGING OF REFERENCE POINTS, LINES, AND AREAS AND LAND (GROUND) POINTS

JUs may purge remote reference points, lines, and areas and land (ground) points if they are no longer required. When a remote point, line, or area is purged from a system by local options, a J7.0 (ACT = 0) message shall not be transmitted.

4.4.3.8 PURGING OF EMERGENCY POINTS

Emergency points are periodically updated and are normally terminated via the J7.0 (ACT = 0) message when the emergency ceases. If a JU fails to receive the J7.0 (ACT = 0) message and further updates are not received, the JU may purge those points after a specified time period has elapsed with no updates.

4.4.3.9 TIME

Time may be associated with the reported point, line, or area. This "time" may represent establishment, acquisition, activation, deactivation, etc. For segmented lines and multi-sided areas defined by more than one Reference TN, time and Time Function, if applicable, shall be reported for the first Reference TN, and shall be considered to apply to the entire line or area. If time and Time Function are transmitted with any of the subsequent line segments or area sides, they shall be the same as the time and Time Function transmitted in the first line segment or area side. In those cases when more than one time is required (i.e., activation, deactivation) for the same

reported point, line or area, additional J3.0 messages shall be transmitted for that point, line or area with the appropriate Time Function value set.

4.4.3.10 EXERCISE INDICATOR IN THE REFERENCE POINT MESSAGE

The Exercise Indicator in the J3.0 message is only used to amplify J3.0 messages with the Point Type field set to value 6, Area (Hazard), and the Point Amplification field set to value 3, Allied Missile Engagement Zone (MEZ), or value 4, Hostile MEZ. An exercise MEZ is one which is being reported for exercise purposes only, i.e., the IU, track, or point to which the MEZ is related may not be able to actually engage targets in that MEZ, nor is it necessary to remain clear of the exercise MEZ for actual operational purposes. For all other values of the Point Type and Point Amplification fields in the J3.0 message the Exercise Indicator field shall be set to value 0.

4.4.3.11 PERIODIC REPORT INDICATOR FOR POINTS

When a JU transmits a J3.0 or J3.5 (PTI = 0) original message or a retransmission due to data change, the Periodic Report Indicator (PER IND) shall be set to value 1. Periodic updates following the original or retransmitted message shall be transmitted with the Periodic Report Indicator set to value 2 thereby providing each JU with the option to process the periodic updates of points. Responses to Data Update Requests for multi-point areas or multi-segmented lines (defined by more than one J3.0 message) shall be transmitted with the PER IND set to value 0 and the Response Indicator set to value 1. A change of positional information for a point, line, or area with independent course and speed does not, in itself, constitute a change of data for the purpose of setting the Periodic Report Indicator to value 1.

4.4.4 AIR, SURFACE (MARITIME), AND LAND (GROUND) TRACK SURVEILLANCE

The rules and conventions applicable to reporting Air, Surface (Maritime), and Land (Ground) surveillance information are based upon the requirements for exchanging these data among JUs. Since the requirements are similar for Air, Surface (Maritime), and Land (Ground) surveillance reporting, these

subfunctions are discussed within this subsection. Specific differences, when applicable, are included in the appropriate paragraphs.

The specific messages used to report Air, Surface (Maritime), and Land (Ground) surveillance data are the J3.2, J3.3, and J3.5 (PTI = 1) messages, respectively. These messages are monitored by nonC² JUs, such as fighter aircraft, for situational awareness and early warning information.

Discussed in this subsection are the various requirements associated with Air, Surface (Maritime), and Land (Ground) surveillance data exchange. The topics covered are:

- a. Track Reporting Criteria.
- b. Track Reporting.
- c. Track Correlation.
- d. Positional Data.
- e. Velocity.
- f. Identity/Identity Confidence/Strength.
- g. Transponder Data.
- h. Track Quality.
- i. Nonreal-time Reports.
- j. Reporting Inactive Sites as Air and Surface (Maritime) Tracks and Land (Ground) Track Data.
- k. Reporting Responsibility.
- l. Information Difference Recognition and Resolution.

m. Termination of Air, Surface (Maritime), and Land (Ground) Track Data.

4.4.4.1 TRACK REPORTING CRITERIA

Track reporting criteria are based on the requirements for the exchange of surveillance information and data usable in providing threat warning information among systems involved in joint operations. The reporting of surveillance track information on the interface shall insure that:

a. The information on the track is as complete, accurate, and timely as possible.

b. Data are correlated and dual designation is minimized.

c. The proper rules for reporting a track are followed.

4.4.4.2 TRACK REPORTING

Track reporting requires a set of rules which are general in nature and which may be adapted to a specific interface configuration to provide an optimum exchange of data. The rules are:

a. The source of track data shall be provided (Source TN).

b. C² JUs that have the capability to automatically initiate tracks for release to the interface without operator action shall also have the capability to deactivate this automatic capability.

c. A JU reporting a real-time track shall report the position of the track extrapolated to the time of transmission.

d. Nonreal-time data shall be identified as such and time tags shall be provided. Nonreal-time track positions shall not be extrapolated.

Procedures for reporting J3.2, J3.3, and J3.5 (PTI = 1) messages are provided in the following paragraphs. Section 5 provides the detailed message transmission rules.

4.4.4.3 COMMON TRACKING

a. Common tracking is defined as sharing of a common track number and shifting R^2 between C^2 JUs. Each air, surface (maritime), land (ground), and space tracked object normally will be reported by one C^2 JU while other C^2 JUs withhold their reports to prevent cluttering the tactical plot. Determination of the C^2 JU responsible for reporting the tracked object shall be in accordance with the procedures in the Air, Surface, Land, and Space Surveillance sections. In this section and in section 4.7.3, Resolution of Air and Surface Track Dual Designations, a track for which positional data has been locally derived by a C^2 JU but is currently being reported by another C^2 JU is referred to as a "common local track", and a track for which positional data has been locally derived and is not currently being reported by another C^2 JU is referred to only as a "local track". In order for common tracking to function properly, all C^2 JUs shall perform correlation and decorrelation of their local track data with respect to the remote data which they are receiving. Failure to properly correlate can result in a dual designation. The protocols in this section are to be followed in order to minimize occurrences and duration of dual designations.

b. Each C^2 JU which has a capability to originate and report real-time air, surface (maritime), land (ground), or space tracks shall have a capability to perform common tracking in accordance with the correlation and decorrelation procedures and criteria which follow. The rules for correlation and decorrelation differ depending on the E/C of the tracks. The rules in paragraphs 4.4.4.3.1, 4.4.4.3.2, and 4.7.3 apply to the correlation and decorrelation of both air tracks and surface tracks, unless otherwise stated. The rules for correlation of land and space tracks are to be determined.

4.4.4.3.1 AIR AND SURFACE TRACK CORRELATION

The correlation process commences with comparing locally derived sensor data (position, velocity, and altitude) with the data received on the interface, in order to prevent or eliminate dual designations. All C^2 JUs that originate real-time air or surface tracks shall have an automatic correlation capability. The following subparagraphs apply to the correlation of any two air tracks and any two surface tracks unless otherwise specified.

a. Local Correlation. The method used for internal correlation of local sensor data is a system design option, irrespective of any of the rules herein.

b. New Local Tracks. New local tracks shall not be reported to the interface until an automatic correlation has been attempted and failed on an initial correlation test or on the next test following an initial tentative correlation (see paragraph 4.4.4.3.1h). If no tentative correlation is found on the initial test, the new local track shall be transmitted. If the new local track tentatively correlates on the initial test but fails correlation on the next test, the new local track shall be transmitted. A new local track that correlates with another track on each of the first two correlation tests shall be correlated and held as a common local track. Thereafter, the decorrelation rules (see paragraph 4.4.4.3.2) apply to the track. Correlation tests shall include active IUs, remote real-time tracks, and other local tracks. If an operator action has been taken which selectively released a new local track for reporting, it shall be transmitted, regardless of the results of correlation testing.

c. Automatic Correlation.

(1) C^2 JUs shall make an automatic correlation test either:

(a) Upon receipt of each remote real-time J3.2 or J3.3 track or J2.0 (Originator E/C = 0 or 3), J2.2, or J2.3 PPLI report which is not confirmed to have an existing correlation to a local track. Such tests shall compare the received remote track or IU to local tracks of the same E/C, including previously common local tracks for which own unit has R^2 .

---OR---

(b) Immediately prior to each transmission of a local track. Such tests shall compare the local track to remote tracks and IUs of the same E/C.

(2) As a system option, common local tracks may be included in the above tests. If a correlation of a common local track to another remote

TN is determined, it shall be reported in a J7.2 message in accordance with paragraph 4.7.3.1.

d. Manual Correlation. A manual capability shall be provided to initiate the correlation of any two tracks irrespective of the correlation test criteria in paragraph 4.4.4.3.1f, the correlation restrictions in paragraph 4.4.4.3.1g, or the requirements in paragraph 4.4.4.3.1h, except that two tracks shall not be manually correlated if they are of a different E/C, or one is simulated and the other is live, or both are remote.

e. Response to Correlation Request. C² JUs shall perform correlation tests in response to correlation requests from other units in accordance with the requirements of paragraph 4.7.3.2.

f. Correlation Tests. Correlation testing shall consist of the position, velocity, and altitude tests specified in this paragraph. These tests are summarized in Table 4.4-1 and specified in detail in the remainder of this paragraph. Positions of all tracks and IUs tested for correlation shall be extrapolated to the same time. The correlation test shall occur no more than 6 seconds after the extrapolation time. A local track shall be considered to correlate to the closest remote track or IU that meets all of the correlation tests, subject to the correlation restrictions in paragraph 4.4.4.3.1g and the requirement to pass two correlation tests in paragraph 4.4.4.3.1h.

Table 4.4-1. Summary of Correlation Tests

Positional Test
$D \leq [a \cdot \text{SQRT}(L^2 + R^2) + b] \text{ dm}$, where: D = Distance in dm between two tracks; a = "window size multiplier" parameter; L = $\text{MIN}([\text{MAX}(E(TQ_L), E(d))], E(c))$; R = $\text{MIN}([\text{MAX}(E(TQ_R), E(d))], E(c))$; E(TQ_L) = positional error associated with local track quality TQ_L, from Table 4.4-2; E(TQ_R) = positional error associated with remote track quality TQ_R, from Table 4.4-2, or remote geodetic position quality Q_{pg} from Table 4.4-4; E(c) = positional error associated with TQ = c, "MIN TQ" parameter, from Table 4.4-2, or Q_{pg} = j, "MIN Q_{pg}" parameter, from Table 4.4-4; E(d) = positional error associated with TQ = d, "MAX TQ" parameter, from Table 4.4-2, or Q_{pg} = k, "MAX Q_{pg}" parameter, from Table 4.4-4; b = "minimum window size" parameter.
Course Test
If both tracks have speed ≥ 10 dmh: $\text{MIN}(C_R - C_L , 360 - C_R - C_L) \leq f$, where: C_L = local course in degrees; C_R = remote course in degrees; f = "course differential" parameter; Otherwise course is not used in the correlation test.
Speed Test
$1 - S_S/S_F \times 100\% \leq \text{MAX}(g, [g(k/S_F)])$, where: S_S = speed of slower track in dmh; S_F = speed of faster track in dmh; g = "speed differential" parameter; k = alternate speed test factor: = 200 dmh for air tracks; = 20 dmh for surface tracks.
Altitude Test
For air tracks, if both tracks have an Altitude Source = 1 or 3, or if the local track Altitude Source is 1 or 3 and the remote track is an IU reported in a PPLI message: $A_R - A_L \leq h$, where: A_L = local altitude in kft; A_R = remote altitude in kft; h = "altitude differential" parameter; Otherwise altitude is not used in the correlation test.

(1) Correlation Test Prohibitions: The following shall not be tested for correlation:

(a) A track with $TQ \leq e$ (see paragraph 4.4.4.3.1f(2)), or a JU with $Q_{pg} = 0$ (see paragraph 4.4.4.3.1f(8)(b)). This prohibition does not apply to new local real-time tracks, but does apply to nonreal-time ($TQ=0$) tracks.

(b) Tracks of different E/C, and tracks with existing E/C conflicts.

(c) Simulated tracks with live tracks, and live tracks with simulated tracks.

(2) Variable Parameters: Variable parameters are used to specify the default, range, and increments of values to be used in correlation tests. They are expressed in the form "default (range, increment)". The intent is to enable rapid change of the standard correlation tests as experience and conditions dictate. It is anticipated that the parameters to be used will be specified in the OPTASK LINK. Systems shall be capable of using any value within the specified range and increments upon system initialization, and shall set the parameter to the default value if no other value is specified. The default values are the same for air and surface track correlation. However, the actual value to be used for air tracks may be specified differently than that used for surface tracks. The variable correlation parameters are defined as follows:

a = 1.0(0.5-3.0, 0.1)	"Window size multiplier". Allows increasing or decreasing the standard TQ-based window sizes to be used by all IUs in an interface.
b = 0.5(0-2.0, .25) dm	"Minimum window size". A value applied to all calculated windows to insure that windows are not so small as to prevent valid correlations, e.g., due to minor errors introduced by extrapolation.

c = 7(3-7, 1)	"Min TQ". The minimum TQ to be used in positional correlation calculations. Lower TQs shall be treated as if they were c. This prevents correlation windows from being unrealistically large. Note: The value used for c can never be less than or equal to the value used for e.
d = 10(8-15, 1)	"Max TQ". The maximum TQ to be used in positional correlation calculations. Higher TQs shall be treated as if they were d. This prevents correlation windows from being unrealistically small.
e = 4(2-6, 1)	"Restricted TQ". Tracks with TQ less than or equal to e are not eligible for correlation, except for new local real-time tracks (see paragraphs 4.4.4.3.1f(1)(a) and 4.4.4.3.1f(4)).
f = 45(15-90, 15) degrees:	"Course Differential". The maximum difference between the reported course of the remote track and the calculated course of the local track allowable for correlation. If the speed of either track is less than 10 dmh, "course differential" shall not be applied in the correlation test.
g = 40(10-100, 10) percent	"Speed Differential". The maximum percentage by which the speed of the faster track may differ from the speed of the slower track for correlation.
h = 10(5-50, 5) thousand feet (kft)	"Altitude Differential". The maximum altitude difference between two air tracks allowable for correlation. (Not applicable to surface track correlation.)
j = 2(1-5, 1)	"Min Q_{pg} ". The minimum value of Q_{pg} to be used in positional correlation calculations. Lower values shall be treated as if they were j. This prevents correlation windows used in testing correlation of PPLI positions from being unrealistically large.
k = 11(1-15, 1)	"Max Q_{pg} ". The maximum value of Q_{pg} to be used in positional correlation calculations. Higher values shall be treated as if they were k. This prevents correlation windows used in testing correlation of PPLI positions from being unrealistically small.

(3) Position Test: Two tracks shall be eligible for correlation, subject to the other tests, prohibitions, and limitations of this paragraph, if they pass the following positional test:

$$D \leq [a \cdot \text{SQRT}(L^2 + R^2) + b] \text{ dm, where}$$

D is the distance (in dm) between the tracks;

a = "window size multiplier" parameter;

b = "minimum window size" parameter;

L = Positional error associated with the TQ of the local track (restricted by Min TQ and Max TQ); and,

R = Positional error associated with the TQ of the remote track (restricted by Min TQ and Max TQ).

L and R are derived from the formula for the area of a circle, $A = \Pi r^2$, with L and R equating to r, the radius of the circle. Thus, L (or R) = $\text{SQRT}(A/\Pi)$, where A is the circular area in dm² within which it is assessed that there is a 95% probability that the track lies, as defined by Track Quality [DFI 280 DUI 001] for the local (or remote) TQ. Table 4.4-2 specifies the values of L and R for each TQ.

Table 4.4-2. Positional Errors Represented by TQ

TQ	L, R
15	0.003 dm
14	0.006 dm
13	0.01 dm
12	0.02 dm
11	0.05 dm
10	0.10 dm
9	0.59 dm
8	1.18 dm
7	2.93 dm
6	5.92 dm
5	8.87 dm
4	11.82 dm
3	14.78 dm
2	29.61 dm

(4) TQ Limitations: Tracks with TQ less than or equal to the restricted TQ value e shall not be automatically correlated, since their positional accuracy is not sufficient to support valid correlation decisions. Furthermore, the range of TQs used in determining correlation windows may be

limited, since use of lower TQs could result in excessively large windows, and use of higher TQs could result in unrealistically small windows. Therefore, TQs less than c shall be treated the same as TQ c , and TQs greater than d shall be treated the same as d , for purposes of calculating D , the correlation window.

(5) Default Correlation Windows: For the default values of Min TQ = 7, Max TQ = 10, minimum window size = 0.5 dm, and restricted TQ = 4, the values of L and R in Table 4.4-2 result in the correlation windows shown in Table 4.4-3.

Table 4.4-3. Correlation Windows (Value of D in dm) for Default Parameter Values

		Remote TQ			
Local TQ		≥ 10	9	8	5-7
	≥ 10	0.64	1.10	1.68	3.43
	9	1.10	1.33	1.82	3.49
	8	1.68	1.82	2.17	3.66
	5-7	3.43	3.49	3.66	4.64

(6) Velocity Test: The reported course of the remote track shall be within f degrees of the calculated course of the local track. The speed of the slower track shall be within g percent of the speed of the faster track, or within $g*200/S_F$ percent for air tracks or $g*20/S_F$ percent for surface tracks, whichever is greater. Velocity comparisons shall use the last reported course and speed of remote tracks and the course and speed calculated for local tracks at the common time to which the tracks are extrapolated at the time of comparison.

(7) Altitude Test: If the Altitude Source of both air tracks is either 1 (Sensor) or 3 (Aircraft Automatic Altitude Report), or if the local track Altitude Source is 1 or 3 and the remote track is an IU reported in a PPLI message, the altitude differential between the two tracks shall not be greater than h . If the Altitude Source of either track is 0 (No Statement/Estimated) or 2 (Aircraft Report), Altitude shall not be used in the correlation test.

(8) PPLI Tests:

(a) When the remote report being tested for correlation is a J2.2 Air or J2.3 Surface PPLI message, the maximum positional error associated with the reported Geodetic Position Quality (Q_{pg}) shall be used for the value of R in the position test. Q_{pg} less than j shall be treated as $Q_{pg} = j$, and Q_{pg} greater than k shall be treated as $Q_{pg} = k$. The values of R for JUs are shown in Table 4.4-4, and the resultant correlation windows for the default Max Q_{pg} value 11 and the default Min Q_{pg} value 2 are shown in Table 4.4-5. (The positional errors associated with each Q_{pg} specified in the Data Element Dictionary are calculated by the JTIDS/MIDS terminal at the .39 level of probability. They have been converted to the .95 level of probability in the tables below, for consistency with the requirements for correlation and TQ calculation.)

Table 4.4-4. Values of R for PPLI

Q_{pg}	R
15	0.02 dm
14	0.03 dm
13	0.04 dm
12	0.06 dm
11	0.08 dm
10	0.12 dm
9	0.16 dm
8	0.23 dm
7	0.33 dm
6	0.46 dm
5	0.65 dm
4	0.92 dm
3	1.85 dm
2	3.69 dm
1	7.38 dm

Table 4.4-5. Correlation Windows (Value of D in dm)
when Remote Track is a JU for Default Parameter Values

		Remote PPLI Q_{pg}									
Local TQ		≥ 11	10	9	8	7	6	5	4	3	2
	≥ 10	0.63	0.66	0.69	0.75	0.84	0.97	1.16	1.43	2.35	4.13
	9	1.10	1.10	1.11	1.13	1.18	1.25	1.38	1.59	2.44	4.18
	8	1.68	1.69	1.69	1.70	1.73	1.77	1.85	2.00	2.69	4.32
	5-7	3.43	3.43	3.43	3.44	3.45	3.47	3.50	3.57	3.97	5.16

(b) If the received J2.2 or J2.3 $Q_{pg} = 0$, the PPLI shall not be correlated automatically. However, if a J2.2 or J2.3 with $Q_{pg} = 0$ is

received for a JU held as a common local track, R^2 for the common local track may be assumed in accordance with paragraph 4.4.2.2.2d.

(c) When the remote report being tested for correlation is a J2.0 Indirect PPLI message with the Originator E/C field set to value 0 (Surface) or 3 (Air), it shall be processed for correlation like a J3.2 air or J3.3 surface (maritime) track with $TQ = 7$.

g. Correlation Restrictions. C^2 JUs shall not automatically correlate two tracks if local/remote data held indicates any of the following conditions exist. The restrictions do not apply to manual correlation. No other correlation restrictions shall be applied for two tracks which pass the correlation tests specified in paragraph 4.4.4.3.1f.

(1) The two tracks have an Identity (ID) difference which constitutes a conflict (see paragraph 4.4.4.3.1i). Systems shall have an initialization parameter and an operator selectable capability to inhibit this automatic restriction. (Use of this capability will be subject to interface coordination and must be promulgated to all C^2 IUs. If the use of this capability changes, all participating C^2 IUs will be informed through voice communication or other communications media. In lieu of specific interface direction, all IUs will restrict automatic correlation by default.)

(2) The two tracks have different Mode II codes, and the local Mode II code is current. Systems shall have an initialization parameter and an operator selectable capability to inhibit this automatic restriction. (Use of this capability will be subject to interface coordination and must be promulgated to all C^2 IUs. If the use of this capability changes, all participating C^2 IUs will be informed through voice communication or other communications media. In lieu of specific interface direction, all IUs will restrict automatic correlation by default.)

(3) Both tracks are locally derived real-time tracks, i.e., being updated with local positional data.

(4) Either track has the Strength field set to a value greater than 1. Systems shall not inhibit correlation if either track has Strength set to No Statement.

(5) One track is a common local track and the other is a remote, and the same unit has R^2 for both tracks.

(6) Either track is currently the subject of a dual designation resolution action involving another TN.

(7) Each track is subject to one or more (not necessarily the same) of the below operational contingency constraints (OCC).

(a) The TN is the subject of a current engagement status message; i.e., the TN is the same TN appearing in a J10.2 Engagement Status message Target TN or Reference TN field.

(b) The TN is the subject of a pending J9.0 Command message originated by or addressed to own unit or a J12.0 Mission Assignment message originated by own unit for which a reply is required and has not been transmitted or received.

(c) The TN is currently a controlled track, i.e., a J10.5 Controlling Unit Report message has been transmitted or received.

(d) The TN is an active or inactive IU.

(8) JUs may apply one exception to the restriction in paragraphs 4.4.4.3.1g(1) and 4.4.4.3.1g(7)(a) above. If either subject track is the Target TN in a J10.2 Engagement Status message originated by the unit attempting correlation, and that track has an ID of Unknown or Hostile, and the other subject track has an ID of Friend, then automatic correlation may be allowed. The Unknown/Hostile track shall be the dropped Track Number (TN-2). This exception allows breaking the engagement and/or destroying missile(s) in flight. This exception shall not be applied by any JU upon receipt of a J7.2 Correlation message. Thus, any JU receiving a J7.2 Correlation message and also holding OCCs on both tracks or conflicting IDs on the two tracks (if the ID conflict correlation restriction is enabled (see paragraph 4.4.4.3.1g(1))) shall reject the correlation in accordance with paragraph 4.7.3.2a(1).

h. Number of Correlation Tests. Two tracks shall pass the correlation tests and restrictions in paragraphs 4.4.4.3.1f and 4.4.4.3.1g 2(1-2,1) times before the correlation is executed. When two tracks pass the correlation tests and restrictions once, they shall be deemed a tentative correlation. The same two tracks shall be tested again upon the next correlation stimulus (see paragraph 4.4.4.3.1c). If the two tracks successfully pass the second correlation test and there is no correlation restriction, they shall be processed for dual designation resolution in accordance with paragraphs 4.4.4.3.1j and k.

i. Correlation of Tracks With Conflicting IDs.

(1) Two tracks shall be considered to have conflicting IDs for correlation processing if:

(a) The ID difference is indicated by the code "1" in Table 4.7-2.

(b) The ID difference is indicated by the code "1*" in Table 4.7-2 and the system processes these differences as conflicts, except that Hostile vs. Pending shall not be considered a conflict for correlation processing.

(c) One track has the Exercise Indicator set to value 0 and the other has it set to value 1.

(2) If conflicting IDs is the only correlation restriction, the operator shall be alerted. The purpose of this alert is to cue the operator to take one of the following actions:

(a) Change the local ID or the Exercise Indicator and ID, thereby allowing automatic correlation, or

(b) Transmit an ID Difference Report, thereby allowing automatic correlation if the remote ID or Exercise Indicator and ID is changed, or

(c) Confirm the restriction, thereby inhibiting the correlation, or

(d) Conduct voice coordination to resolve the situation.

(3) If the above actions result in resolution of the ID conflict, the TN to be retained shall be tested for decorrelation in accordance with paragraph 4.4.4.3.2a before executing the correlation, except the test shall be conducted only once.

j. Dropped Track Number Selection. C² JUs shall not automatically select as the TN to be dropped a TN which has any of the OCCs listed in paragraph 4.4.4.3.1g(6 7). In the absence of such a selection constraint, JUs shall select the higher TN as the TN to be dropped. For a track that has both a TN greater than 07777 and a TN less than 07777, as reported in a J7.4 message, the track with TN greater than 07777 shall be used in this comparison.

k. Execution of the Correlation. The following rules apply to the disposition of the Dropped TN and the retention of data from the Dropped TN upon origination or receipt of a J7.0 (ACT = 0) message for the Dropped TN. The correlation shall be deemed to have failed if no J7.0 (ACT = 0) is received for the dropped TN after a period of 60 seconds from the transmission of the correlation request and all associated processing for the correlation shall be cancelled.

(1) Disposition of the Dropped Track Number:

(a) If own unit holds the Dropped TN as a local or common local track, the Retained TN shall be designated as a common local track.

(b) If own unit has R² for the Dropped TN, a J7.0 (ACT = 0) Drop Track message shall be transmitted for the Dropped TN. If the Dropped TN is reported by another IU after transmission of the J7.0, own unit shall retain the Dropped TN as a remote track and shall not reattempt to correlate the Retained TN and the Dropped TN for a period of 60 seconds after transmission of the J7.0.

(c) When a J7.2 message is initiated by own unit and a Drop Track message has not yet been received for the Dropped TN, it shall be retained as a remote track.

(2) Dropped TN Data Retention: Data specified below shall be transferred from the Dropped TN to the Retained TN when the correlation is executed. No other Dropped TN data shall be transferred to the Retained TN. It is expected that normal reporting protocols will result in the establishment of the appropriate data for the Retained TN.

(a) Kinematic Data. If the Dropped TN is a local or common local track, the Dropped TN Latitude, Longitude, Course, Speed, Altitude, Altitude Source, TQ, and Strength shall be transferred to the Retained TN.

(b) Identification Data. Retention of identification data is dependent upon whether the ID conflict correlation restriction is inhibited (see paragraph 4.4.4.3.1g(1)):

1 Restriction Not Inhibited: If the Identity (ID) (or Identity Amplifying Descriptor (IAD) of two exercise tracks) of retained TN and Dropped TN are different and the difference would result in automatic acceptance of the Dropped TN ID/IAD in accordance with Table 4.7-2, the Dropped TN ID/IAD and Special Interest Indicator, Platform, Platform Activity, and Specific Type shall be transferred to Retained TN.

2 Restriction Inhibited: When the Identity of Retained TN and Dropped TN are the same, associated identification data (Platform, Platform Activity, Specific Type, Exercise Indicator, and Special Interest Indicator) reported for the Retained TN shall be retained. When the Identity of Retained TN and Dropped TN are different, the last Identity reported for Dropped TN shall be considered equivalent to a J7.0 (ACT = 1) Identity Difference Report for the Retained TN. It shall be processed in accordance with paragraph 4.7.1.2.2 immediately after the correlation is executed.

(c) IFF/SIF Data. Any Dropped TN nonzero Mode I, II, or III IFF/SIF data for a mode for which the Retained TN data is zero shall be

transferred to the Retained TN. If the Dropped TN Mode IV data is a higher value than the Retained TN Mode IV data, it shall be transferred to the Retained TN.

(d) Force Tell and Emergency Indicators. If the Dropped TN had the Force Tell Indicator set to value 1, the Retained TN shall have the Force Tell Indicator set to value 1. If the Dropped TN had the Emergency Indicator set to value 1, the Retained TN shall have the Emergency Indicator set to value 1.

4.4.4.3.2 AIR AND SURFACE TRACK DECORRELATION

The following subparagraphs apply to the decorrelation of any two air tracks or any two surface tracks.

a. Decorrelation Requirements. All C² JUs that initiate real-time air or surface tracks shall have an automatic decorrelation capability. C² JUs may also perform manual decorrelation, and may have a capability to require manual confirmation of automatic decorrelations. Implementation of automatic and manual functions shall adhere to the following requirements:

(1) Automatic decorrelation tests shall be performed for each common local track upon receipt of each J2 or J3 message on the track.

(2) Common local tracks shall be decorrelated if, on receipt of 2(1-5, 1) consecutive remote track reports, the remote track falls outside a distance of 1.5(1.0-2.0, 0.1) times the maximum correlation distance calculated in accordance with paragraph 4.4.4.3.1f(3).

b. Execution of the Decorrelation. After it has been determined that a common local track (TN A) satisfies the criteria of an automatic or manual decorrelation, the decorrelation shall be executed as follows:

(1) The local track shall be automatically tested once for correlation against remote tracks (not common local tracks) in accordance with paragraphs 4.4.4.3.1f and g. If the automatic correlation test fails, assign a new TN (TN B) to the local track and report TN B in a J3.2 or J3.3

message, with an initial ID of Pending. For manual decorrelation the Pending ID may be overridden by operator action.

(2) Establish TN A as a remote track.

c. Decorrelation Considerations. If local or remote data held indicates one of the following conditions exist, action shall be taken as indicated:

(1) TN A is the Target TN of a J10.2 Engagement Status message for a current engagement reported and conducted by own unit, or is the Reference TN or Target TN of a J10.2 message for a current engagement reported by own unit and conducted by another unit. Decorrelate and alert an operator as a cue to transmit the J10.2 message with the Weapon Engagement Status field set to value 8 (Engagement Broken) if appropriate. Another J10.2 message with the new TN shall be transmitted only if initiated by operator action, by a WILCO response to a J12.0 Mission Assignment against TN B, or by receipt of a J12.6 Target Sorting message reporting an engagement against TN B.

(2) TN A is the subject of a pending J9.0 Command message which own unit originated or to which own unit is preparing a reply. Execute the decorrelation and provide operator display of new track status on TNs A and B before release of the J9.0 reply. The reply shall be relative to TN A only.

(3) TN A is controlled by own unit; i.e., is the subject of own unit reported J10.5 Controlling Unit Report message. Do not automatically decorrelate. If manually decorrelated, alert the operator as a cue to report termination of control TN A if appropriate. Report commencement of control of TN B using the J10.5 message only if initiated by operator action. If the controlled track is a nonC² JU, then decorrelate and continue reporting control of TN A.

(4) TN A has been paired by own unit; i.e., is the subject of own unit originated J10.6 message. Decorrelate and alert an operator as a cue to terminate the pairing on TN A and initiate the pairing on TN B if appropriate.

(5) TN A has been correlated with an Index Number by own unit, i.e., is the subject of own unit originated J12.5 message. Assess whether the Index Number should remain with TN A or B, and transmit J12.5 messages as appropriate.

(6) TN A is the subject of a handover which is in progress; i.e., a TN in a J10.3 Handover message. The decorrelation shall be delayed until the handover process is completed or terminated, then the decorrelation shall be executed and an operator alerted as a cue to report control in the J10.5 Controlling Unit Report message as appropriate. Operator display of the pending decorrelation shall be provided.

4.4.4.4 POSITIONAL DATA

The geodetic latitude and longitude for each Air, Surface (Maritime), and Land (Ground) track shall be reported in the respective Air, Surface (Maritime), and Land (Ground) Point/Track messages. In addition, Air surveillance reporting shall include Altitude and Altitude Source when available.

4.4.4.5 VARIANCE AND TIME STAMP ON NEEDLINE PGs

The J12.6C7 Kinematic Data 1 continuation word is used by nonC² JUs on Needline PGs to report kinematics estimated errors on the track when it is necessary to have more accurate data than the target position quality indicator.

4.4.4.5.1 VARIANCE EVALUATION ON NEEDLINE PGs

The estimation of error is needed independently on each measurement axis. For instance for a BEARING, ELEVATION, and DISTANCE independent measurement and estimation, the variance of error in bearing, elevation and distance is required. This is described with a diagonal covariance matrix of estimation error (three elements). Seeing that the transmitted track or target position is in geodetic reference axes it is logical to transmit the location error in the same coordinates. In that case the errors are no longer independent and the transmission of the cross terms of error is necessary too. This is described with a symmetric 3D matrix with 6 relevant data elements.

In what follows X = LATITUDE, Y = LONGITUDE, Z = ALTITUDE.

If Xe (or Ye, Ze) designates the estimated location, X (or Y, Z) the actual location and E the mathematical mean then:

$$\text{Var XX} = E (X_e - X)^2$$

$$\text{Var YY} = E (Y_e - Y)^2$$

$$\text{Var ZZ} = E (Z_e - Z)^2$$

$$\text{Var XY} = E (X_e - X) (Y_e - Y)$$

$$\text{Var XZ} = E (X_e - X) (Z_e - Z)$$

$$\text{Var YZ} = E (Y_e - Y) (Z_e - Z)$$

Those data are the results of common filters (Kalman, mean square filter, ...).

4.4.4.5.2 VARIANCE MATRIX

The variance matrix shall be used when accurate data on the track quality (or target position quality) is available in the transmitting center. The matrix elements which can not or are not computed by the transmitting center shall be set to NO STATEMENT. Each diagonal element can be set to a significant value or to NO STATEMENT independently of one another. It is useful to set the cross elements only if the diagonal elements are set (for instance Var XY shall be set only if Var XX and Var YY are set to a significant value).

Elements of the covariance matrix of error in estimated track or target location defined as follows:

$$\begin{bmatrix} \text{Var XX} & \text{Var YX} & \text{Var XZ} \\ \text{Var YX} & \text{Var YY} & \text{Var YZ} \\ \text{Var ZX} & \text{Var ZY} & \text{Var ZZ} \end{bmatrix}$$

4.4.4.5.3 TIME STAMP ON NEEDLINE PGs

The SECOND, HUNDREDTHS fields shall be used to specify the best estimated date of kinematics elements (LATITUDE, LONGITUDE, ALTITUDE, VELOCITY) transmitted in the J12.6I and J12.6E0 basic Words. In case the accuracy

cannot be better than 500 ms, a NO STATEMENT shall be set in the HUNDREDTHS field. In case the accuracy cannot be better than a minute, a NO STATEMENT shall be set in the SECOND field.

4.4.4.6 VELOCITY

The velocity of Air, Surface (Maritime), and Land (Ground) tracks shall be reported as course and speed. The speed shall be reported in data miles per hour of ground speed. The course shall be reported in degrees with respect to true north.

4.4.4.7 IDENTITY DATA

Track identity as defined in paragraph 4.4.2.1 is exchanged. The platform and platform activity fields are defined in the message section of this volume.

For each of the Platform, Platform Activity, Specific Type, and Special Interest Indicator fields which are implemented by a C² JU, the JU shall accept all defined field values for retransmission and operator appreciation, in the event of assuming R² for a previously-reported track. This requirement is independent of the actual values implemented by the C² JU for transmission origination.

Values accepted for retransmission shall be retransmitted if the JU assumes R², unless the JU holds locally derived data other than No Statement (non-NS) for the field which differs from the value accepted for retransmission. In the latter case, the JU shall report the locally derived data. As an exception, non-NS data for the Platform, Platform Activity, and Specific Type fields received from the controlling unit for the track shall be retransmitted regardless of locally derived data. If the Special Interest Indicator is set to value 1, it shall be retransmitted as value 1 by any JU assuming R².

4.4.4.8 STRENGTH

The strength of the reported Air, Surface (Maritime), or Land (Ground) track shall be exchanged to indicate the number of aircraft, ships, ground units, or objects comprising the reported track.

For Land (Ground) tracks, when the J3.5C3 word is implemented, the J3.5I word Strength field shall be computed from the Strength, Total Number of Vehicles field. The J3.5C3 Strength, Total Number of Vehicles; Strength, Percent of Tracked Vehicles (Vehicle Strength fields); and the J3.5I word Strength field are all transmitted. For reception, the J3.5C3 Vehicle Strength fields and the J3.5I word Strength field are received as sent. If the J3.5C3 word is not implemented, then only the J3.5I word Strength field is transmitted or received.

When the Strength field is computed from the Strength, Total Number of Vehicles field, the following translation shall be used:

<u>Strength, Total Number of Vehicles</u>	<u>Strength</u>
NS	NS
1 Vehicle	1 Unit
2 Vehicle	2 Units
3 Vehicle	3 Units
4 - 5 Vehicles	5 Units
6 - 7 Vehicles	7 Units
8 - 10 Vehicles	10 Units
11 - 15 Vehicles through Greater Than 200 Vehicles	Greater Than 12 Units

4.4.4.9 IFF/SIF DATA EXCHANGE

The exchange of IFF/SIF modes and codes consists of five functional areas:

- a. IFF/SIF Surveillance Data Reporting (this paragraph).
- b. Unique Mode II Code Protection (paragraph 4.7.6.1).

- c. Clearing IFF/SIF Data (paragraph 4.7.6.2).
- d. IFF/SIF Difference Resolution (paragraph 4.7.6.3).
- e. IFF/SIF Update Request (paragraph 4.7.6.4).

Each of the functional areas are described in the paragraphs indicated above. The J2.XC1, J3.XC1, and J7.5 messages are used for this purpose as summarized in Table 4.4-6.

TABLE 4.4-6. IFF/SIF Message/Function Summary

MESSAGE	FUNCTION	SURVEILLANCE DATA REPORTING	DIFFERENCE RESOLUTION	DATA UPDATING	CLEARING IFF/SIF DATA
PPLI J2.0C1, J2.2C1 J2.3C1, J2.4C1 IUs OWN UNIT IFF/SIF DATA		TRANSMITTED PERIODICALLY WITH J2.XB MESSAGE	NA	NA	NA
J3.XC1 TRANSMITTED ONLY BY JU WITH R ²		TRANSMITTED AT NEXT OPPORTUNITY FOR NEW TRACKS WHEN ASSUMING R ² OR WHEN DATA CHANGE. PERIODICALLY - AT 1/8 THE BASIC MESSAGE RATE FOR REALTIME TRACKS AND WITH EACH NRT TRACK REPORT	TRANSMITTED AT NEXT OPPORTUNITY AFTER ACCEPTING OR REJECTING REMOTE DATA RECEIVED IN J7.5 (ACT = 1) MESSAGE.	TRANSMITTED AT NEXT OPPORTUNITY IN RESPONSE TO J7.1 (ACT = 1) DATA UPDATE REQUEST AND TO A J7.5 (ACT = 2) IFF/SIF UPDATE REQUEST.	NA
J7.5 (ACT = 0) CLEAR IFF/SIF TRANSMITTED BY ANY JU		NA	NA	NA	INITIATED BY OPERATOR ACTION
J7.5 (ACT = 1) DIFFERENCE REPORT TRANSMITTED ONLY BY NONR ² JUs		WHEN LOCALLY ENTERED DATA CHANGES FROM ZERO TO NONZERO OR NONZERO TO ANOTHER NONZERO VALUE. IN RESPONSE TO A J3.XC1 "NO DATA" REPORT ON ONE OR MORE MODE/CODE WHEN LOCAL NONZERO IFF/SIF IS HELD.	TRANSMITTED TO REPORT A DIFFERENCE IN ACCORDANCE WITH TABLE 4.7-5 IFF/SIF, DIFFERENCE RESOLUTION MATRIX. MAY BE INITIATED BY OPERATOR ACTION ANYTIME.	TRANSMITTED IN RESPONSE TO RECEIVED J7.5 (ACT = 2) FROM THE R ² JU.	NA
J7.5 (ACT = 2) IFF/SIF UPDATE REQUEST TRANSMITTED BY ANY JU		NA	NA	INITIATED BY OPERATOR ACTION	NA

4.4.4.9.1 IFF/SIF SURVEILLANCE DATA REPORTING

The reporting of IFF/SIF surveillance data in the J3.2C1 and J3.3C1 words for Air and Surface tracks, respectively, is the responsibility of the JU with R² while all other JUs without R² are responsible for monitoring such data and only reporting if they hold different data with the J7.5 message. In this way the JU with R² can be assumed to be reporting the most current data available in the interface. Surveillance reporting rules are as follows:

a. R² units shall report all IFF/SIF valid data locally held for that track in accordance with the transmit rules for the J3 messages. Validity of codes for established tracks will be determined as either "Valid Data" or "No Data" using the following criteria:

(1) No Data: No valid code is currently held for the subject local or remote track/mode. (This condition is reported as zeroes in the applicable Mode Code field of the J3 continuation word.)

(2) Valid Data: Valid code responses are those codes which have been received from own sensors on two or more successive interrogations for Modes I, II, and III with the same value, one interrogation for Mode IV, manually entered codes, or codes accepted in accordance with the IFF/SIF Difference Resolution Matrix, Table 4.7-5. This condition will be reported by entering the nonzero code in the applicable Mode Code field of the J3 continuation word.

b. Any change in the IFF/SIF code values from a No Data status to Valid Data or changes from Valid Data to other Valid Data will be reported as occurring. Changes from a Valid Data value to a No Data status as a result of the clearing function (J7.5 (ACT = 0)) will not cause the transmission of a change report. Changes derived from both local and remote sources shall be considered for reporting in accordance with this rule.

c. Tracks with Valid Data which subsequently fail to respond to interrogations shall not be changed to the No Data status unless a Clear action is taken.

4.4.4.10 TRACK QUALITY

a. Track Quality is a measure of the reliability of the positional information of a reported Air, Surface (Maritime), or Land (Ground) track determined by the unit transmitting the track. It is a numerical value of 0 through 15 which is included in the J3.2, J3.3, and J3.5 (PTI = 1) messages. A value of 0 indicates a nonreal-time report and the values 1 through 15 indicate different degrees of reliability of the positional data, with 15 being the most reliable.

b. The reliability of the positional information is expressed in terms of the positional accuracy associated with each TQ value. The positional accuracy associated with each TQ value is defined as the area (dm^2) within which there is a 0.95 probability that the track is actually located at the time of the report.

c. TQ algorithms shall be designed to ensure that reported TQ accurately reflects the reporting unit's best estimate of positional accuracy, at the 0.95 level of probability, in conformance with the positional accuracy values associated with each TQ. TQ computations shall take the following factors into account, as a minimum:

- (1) Design accuracy of the sensor which is tracking the reported track.
- (2) Elapsed time since the last sensor update on the reported track.
- (3) Most recently calculated velocity of the track.
- (4) Own unit's current geodetic position quality as supplied by the JTIDS/MIDS terminal.

d. A JU shall not report a TQ value which has an associated positional accuracy better than the design accuracy of the JU'S tracking sensor and processing gain.

e. A JU shall not report a TQ value which has an associated positional accuracy which is better than that associated with own unit's current geodetic position quality.

f. A JU shall not artificially increase TQ between sensor inputs.

g. When reported on the Surveillance NPG by a C² JU, a TQ value as specified in Table 4.4-7 shall be initially assigned to a track not locally acquired but obtained via a J12.6 Target Sorting message from a nonC² JU. The C² JU shall extrapolate the received target's position to the time of transmission. If the C² JU has correlated local sensor data for the track, this paragraph need not be applied with regard to TQ.

Table 4.4-7. Target Position Quality (TPQ) to TQ Translation

<u>TPQ</u>	<u>NOTES</u>	<u>TQ</u>
0	No Statement	6
1	< or = 4.4 Square Data Miles	8
2	< or = 1.10 Square Data Miles	9
3	< or = 0.0281 Square Data miles	10

4.4.4.11 VARIANCES AND COVARIANCES

Following transformations are elaborated for track or target data issuing from needline PGs.

4.4.4.11.1 TRANSFORMATION OF VARIANCES AND COVARIANCES TO TPQ

a. If S is the area within which there is a 95% probability that a target is actually located at time of report, we get the following relationship between S and variances/covariances:

$$S = -2.\pi.\ln(0.05) \ k \ (\text{var } XX + \text{var } YY) / (1+k^2)$$

$$S \cong 18.8227 \ k \ (\text{var } XX + \text{var } YY) / (1+k^2)$$

with $k^2 = (\text{var } XX + \text{var } YY + \sqrt{\Delta}) / (\text{var } XX + \text{var } YY - \sqrt{\Delta})$
 and $\Delta = (\text{var } XX - \text{var } YY)^2 + 4 \text{ cov}^2 (X, Y)$

b. The relationship between S and TPQ is the following:

S (sdm)	S (km ²)	TPQ
> 4.4	> 14.7	0
∈]1.1, 4.4]	∈]3.7, 14.7]	1
∈]0.0281, 1.1]	∈]0.094, 3.7]	2
< or = 0.0281	< or = 0.094]	3

4.4.4.11.2 TRANSFORMATION OF TPQ TO VARIANCES AND COVARIANCES

The variance matrix in cartesian referential (x, y, z) is the following:

$$P = \begin{pmatrix} S/188227 & 0 & 0 \\ 0 & S/188227 & 0 \\ 0 & 0 & \text{var ZZ} \end{pmatrix}$$

where:

S is the maximal area within there is a 95% probability that a target is actually located at time of report and var ZZ takes into account source of altitude:

- var ZZ = 685.9 sdm (2294*10⁶ m²) if information about altitude is unknown,
- var ZZ = S/18.8227 if information about altitude is provided by a sensor.

4.4.4.12 VARIABLE TRACK QUALITY

A variable track quality (VTQ) function may be implemented by individual units to override normal TQ processing. If this function is implemented, the operator shall be able to manually enter a TQ value of 3 through 6 to be used as the maximum TQ reported by the unit while VTQ is activated. Once VTQ is activated, TQ values shall be calculated normally but any calculated value exceeding the entered value shall be reported as the entered value. Using the entered value as the maximum TQ value shall continue until VTQ is deactivated or a new value is entered. When VTQ is deactivated, normal TQ processing shall resume.

4.4.4.13 NONREAL-TIME REPORTS

A track report is identified as a nonreal-time report with the TQ field set to value 0 if any of the following conditions are true:

- a. The track data originate from other than a TDS or JTIDS/MIDS equipped aircraft.
- b. The track data have been relayed from another system by other than a real-time data link interface.
- c. The track data have been derived from other than integrated sensors.

4.4.4.13.1 TIME

The time reported shall be the time the positional data reported on the interface are valid. This time shall be reported in the hour and minute fields of the J3 Amplification continuation word.

4.4.4.14 REPORTING RESPONSIBILITY

R² procedures for Air, Surface (Maritime), and Land (Ground) tracks are contained in this paragraph. These rules are designed to ensure that only the JU having the best positional data available is reporting the track on the interface. The R² rules are as follows:

- a. The first JU to report the track has R² on that track.
- b. A JU transmits a track report for an Air, Surface (Maritime) or Land (Ground) track only when it has R² for that track.
- c. A JU assumes R² on a common track if its local TQ at the time of transmission exceeds the received TQ by 2 or more.
- d. A JU assumes R² if it has local real-time data and nonreal-time data were received.

e. A JU assumes R^2 if it has not received a remote report on a locally held Air or Surface (Maritime) track for approximately 40 seconds, or on a locally held Land (Ground) track for approximately 120 seconds.

f. A JU receiving a J7.0 (ACT = 0) message on a locally held track shall assume R^2 at the next opportunity to transmit the track if local reporting eligibility remains and a remote report has not been received on that track. Immediately prior to assuming R^2 for an air or surface track after receipt of a Drop Track message, a JU shall test the track for correlation in accordance with paragraphs 4.4.4.3.1f and g, except the test shall be conducted only once.

g. A JU without R^2 for a nonreal-time track with the TQ field set to value 0 shall assume R^2 for that track when the track is locally updated by a new nonreal-time report. A JU reporting a nonreal-time track has R^2 regardless of the time value in the track report. The time value in the track report is not a criterion for an R^2 shift.

h. A JU receiving a J2 PPLI message (with the NPS Indicator set to Inactive, Conditional Radio Silence, or TDS Failure) from a JU that has R^2 of a locally held track, may assume R^2 at the next opportunity to transmit the track if local reporting eligibility remains and a remote report has not been received on that track.

i. A JU relinquishes R^2 for a real-time Air, Surface (Maritime) or Land (Ground) track upon reception of a remote track report in which remote TQ is greater than the local TQ, or upon reception of a remote track report for the track which contains a TQ equal to the local TQ from a JU whose STN is greater than the local STN.

j. A JU with R^2 on a track retains the responsibility until it is relinquished in accordance with the above rules or until the track is dropped.

4.4.4.15 INFORMATION DIFFERENCE RECOGNITION AND RESOLUTION

The exchange of Air, Surface (Maritime), and Land (Ground) surveillance information on the interface requires procedures to recognize and resolve

detected information differences between local data and data being reported on the interface. Detection and resolution of Identity, Special Interest Indicator, Exercise Indicator, Platform, Platform Activity, Environment/Category, IFF/SIF, and Strength differences are resolved by transmitting the appropriate J7 message. The specific procedures applicable to the resolution of those differences are discussed in paragraph 4.7, Information Management.

4.4.4.15.1 SURVEILLANCE DATA DIFFERENCE (POSITION/VELOCITY/ALTITUDE OR ELEVATION)

Differences in position, velocity, or altitude/elevation recognized by a JU are not resolved through conflict processing and shall not generate a J7.0 (ACT = 2) message. However, differences in these elements may cause a JU to assume that one TN represents two different tracks or different TNs are being used to report the same track. (Refer to Resolution of Duplicate Track Number, paragraph 4.1.3.7.)

4.4.4.16 TERMINATION OF AIR, SURFACE (MARITIME), AND LAND (GROUND) TRACK DATA

The following subparagraphs describe the termination of Air, Surface (Maritime), and Land (Ground) tracks.

4.4.4.16.1 TRANSMISSION OF THE DROP TRACK REPORT MESSAGE

The J7.0 (ACT = 0) message is transmitted when a JU ceases reporting a track for which it currently has R^2 , except in the following cases:

- a. When a JU ceases reporting a track because it has relinquished R^2 to another JU.
- b. When that track becomes an Active IU on the network with the same TN.

4.4.4.16.2 PURGING OF REMOTE TRACKS

There may be cases when a system does not receive a J7.0 (ACT = 0) message and receives no further updates on the remote track. Each system should have

the capability to automatically purge those tracks after a specific time interval. The time interval is a system-selected parameter and should consider the irregular reporting of nonreal-time tracks. Under this condition, a J7.0 (ACT = 0) message shall not be transmitted.

4.4.4.17 MINIMUM WAIT BEFORE TRANSMITTING TRACKS

After initially achieving Active status, or after returning to Active status from Inactive status or TDS Failure, C² JUs capable of assuming R² for air, surface, or land tracks shall not transmit air, surface, or land tracks until sufficient reporting responsibility checks, correlation, and data registration are performed (this also applies to a C² JU that is deactivating a receive filter). The minimum wait before reporting air and surface tracks is 12 seconds and for land tracks is 48 seconds. This may be either an automatic or manual function. System design should allow for longer wait times as well as an override in cases where operational necessity requires a shorter wait time or none at all.

4.4.5 SUBSURFACE (MARITIME) SURVEILLANCE

The rules and conventions applicable to reporting Subsurface (Maritime) surveillance information are based upon the requirements for exchanging these data between JUs but differ from those for Air, Surface (Maritime), and Land (Ground) reporting due to the nature of the source of the information. The specific message used to report Subsurface surveillance tracks is the J3.4 Subsurface (Maritime) Track message. The relationship of acoustic and ASW point to Subsurface track reports is described in paragraphs 4.8.4 and 4.8.4.2. Discussed in this subsection are the various requirements associated with Subsurface surveillance data exchange.

4.4.5.1 TRACK REPORTING CRITERIA

Track reporting criteria are based on the requirements for the exchange of Subsurface surveillance information and data useable in providing threat warning information between systems involved in joint operations. The reporting of Subsurface surveillance track information on the interface shall ensure that:

a. The information on the track is as complete, accurate, and timely as possible.

b. The proper rules for reporting a track are followed.

4.4.5.2 SUBSURFACE (MARITIME) SURVEILLANCE REPORTING

The J3.0, J3.4, and J5.4 messages are used to exchange tactically significant information that has been derived from ASW sensors. Within the Subsurface surveillance function these messages are used to report bearings, ranges, and tracks.

4.4.5.2.1 SUBSURFACE (MARITIME) TRACK REPORTING

The rules for Subsurface surveillance track reporting are:

a. The source of track data shall be provided (Source TN).

b. Established local tracks shall be reported with all known parameters at the next reporting opportunity.

c. All data shall be time tagged.

4.4.5.2.2 ACOUSTIC BEARING/RANGE REPORTING

The J5.4 Acoustic Bearing/Range message shall be used to exchange information on bearings (ambiguous and resolved) and/or range derived from ASW sensors. The source frequency is not required to report acoustic information. Bearings shall be reported from the detecting sensor origin.

a. The J5.4E0 Latitude and Longitude fields shall be set to the position of the acoustic bearing origin.

b. If the detecting sensor is integral to the reporting JU, the J5.4C2 Origin TN field shall contain the TN of the reporting JU. A towed array is considered integral to the ship. If the detecting sensor is integral to another unit, track, or point (e.g., non-IU, sonobuoy) being reported, the Origin TN field shall contain the TN of the detecting unit, track, or point.

Otherwise, the Origin TN field shall be set to value zero (No Statement) to indicate the detecting sensor is neither integral to the reporting JU nor to another reported unit, track, or point (e.g., unreported sonobuoy).

c. The position of a bearing origin need not be the same as the position of Origin TN. The origin of a bearing detected by a towed array shall be reported as the actual position based on the length of the array.

When reporting ambiguous passive bearings, Bearing Report Type (BRT) set to value 1, JUs shall report bearings using both the Bearing 1, ASW and Bearing 2, ASW fields of the J5.4E0 and J5.4C1 words, respectively. The origins of both bearings must be the same. When reporting a resolved bearing, BRT set to value 2, JUs shall report the resolved passive bearing in the Bearing 1, ASW field. Upon receipt of a BRT set to value 2, JUs shall not process the Bearing 2, ASW field.

When reporting range to an ASW contact without a bearing, JUs shall set the BRT field to value 3, Range Only. When reporting a bearing and range, JUs shall set the BRT field to value 0, Bearing and Range, the Bearing 1, ASW field to the bearing, and the Range field to the range. The Sensor Indicator field may be set to the sensor holding contact, and the Bearing Accuracy, ASW and Range Accuracy, ASW fields may be set to the accuracies of the reported bearing and range. Upon receipt of a J5.4 message with BRT set to value 0, JUs shall not process the Bearing 2, ASW field. JUs shall discard a message with BRT set to value 0 or 3 if the Range field is received as No Statement.

4.4.5.2.3 REPORTING ASW POINTS, LINES, AND AREAS

The J3.0 Reference Point message with the point type field set to value 7 (ASW) or value 8 (ASW, 1) is used to report ASW points, lines, or areas as specified in paragraph 4.4.3.1. The definitions and use of various ASW point types are provided in appropriate operational doctrine, and they may be reported on the surveillance net.

The following ASW point amplification types are reported to provide a position or approximate location of a possible target of interest when no sensor measurement of course/speed is available for reporting in a J3.4 message:

- a. Sinker.
- b. Brief Contact.
- c. Search Center (ASW).
- d. Estimated Position (EP).
- e. Fix (ASW).
- f. Area of Probability.

Other ASW point amplification types are used in the coordination of ASW assets and mission planning and include the following:

- a. NOTACK Area.
- b. Moving Haven.
- c. Sonobuoy Position.
- d. Sonobuoy Pattern Reference Position.
- e. Limiting Line of Approach.
- f. Friendly Weapon Danger Area (FWDA).

For these ASW points, the time of activation and/or the time of deactivation may be reported. NOTACK Area, Moving Haven, and FWDA will be reported with both times. If both times are not received, the default period for NOTACK Areas is 2 hours and for FWDAs is 155 minutes. For Sonobuoy Position and Sonobuoy Pattern Reference Position, time of deactivation will be reported to specify the time of expiration of deployed assets, or time of activation will be reported to specify the time for the deployment of future assets. Additionally, the sonobuoy RF channel number, depth indicator and transducer depth (optional), sonobuoy type, and holding contact status will be reported as appropriate for a sonobuoy position. For Sonobuoy Pattern Reference position, the pattern type, number of sonobuoys, sonobuoy spacing, sonobuoy

row spacing, pattern radius, and/or bearing may be reported as necessary. For Limiting Line of Approach the bearing and time of activation will be reported. For ASW Station, the time of activation will be reported.

Minimum implementation requirements for each ASW point amplification value is specified in Appendix A. Word sequence requirements are specified in T/R rules and message maps.

4.4.5.2.4 ESTABLISHMENT OF SUBSURFACE SURVEILLANCE TRACKS AND POINTS AND FIXES

Further refined information concerning a subsurface fix or one of the other ASW points reported as specified in paragraph 4.4.5.2.3 above may result in a Subsurface surveillance track which would then be reported with a new TN, or the reported Subsurface surveillance fix or other ASW point may be associated with an existing track.

4.4.5.2.5 REPORTING SUBSURFACE SURVEILLANCE TRACK DATUM

C² JUs that report subsurface tracks shall have the capability to report a track as a DATUM when contact is lost. The following protocols apply:

- a. The decision to report a DATUM shall be an operator function.
- b. The DATUM shall be reported in a J3.4 message with the same Reference TN as the track for which contact has been lost, and the other J3.4 fields set as follows:

- (1) Data Report Type (DRT) = 4 (DATUM).
- (2) ASW Time Function = 3 (Time Contact Lost) or 1 (Time Datum Established).
- (3) Hour and Minute: Time (truncated) that contact was lost or DATUM established.
- (4) Latitude, Longitude, 15 Meters Depth, and Depth Contact: Last known position.

(5) Course and Speed: Last calculated course and speed.

(6) Sensor: The sensor that held contact.

(7) All other fields: Same as values held before contact was lost unless changed by operator action.

c. Although the last known course and speed are reported, the DATUM shall not move. Last known course and speed are reported only for calculation of the DATUM Error and other data related to ASW search.

d. DATUM Error shall be reported in the J3.4 if calculated. The J3.4 DATUM Error field is used only when DRT = 4.

e. DATUMs shall be updated in accordance with the J3.4 Transmit Rules. However, all data except DATUM Error shall remain the same as reported in the initial DATUM report, unless changed by operator action.

f. A DATUM shall only be dropped or purged by operator action.

g. If contact is regained, a J3.4 with DRT set to value 0, 1 or 2 shall be reported with the same TN as the DATUM, or a new TN depending on operator action.

4.4.5.3 TRACK ASSOCIATION

Because Subsurface (Maritime) surveillance is performed using different information sources than those used for Air, Surface (Maritime), or Land (Ground) surveillance (e.g., Radar or IFF/SIF transponder), the correlation procedures which are specified for Air, Surface (Maritime), or Land (Ground) tracks are not applied to Subsurface tracks. Instead, it is the function of the operator to perform manual correlation of Subsurface surveillance data. In order to provide for a complete compilation of the subsurface situation, the J7.7 Track Association message is used whenever it is determined that two Track Numbers (TNs) are being used to report information for the same target. Procedures to recognize and resolve remote and local track information differences are covered in paragraph 4.4.5.12.

4.4.5.4 POSITIONAL DATA

The geodetic latitude and longitude for each Subsurface surveillance track shall be reported in the J3.4 message. In addition, Subsurface surveillance reporting shall include the capability for specifying depth when available.

4.4.5.5 VELOCITY

The velocity of Subsurface surveillance tracks shall be reported as course and speed. The speed shall be reported in data miles per hour of ground speed. The course shall be reported in degrees with respect to true north.

4.4.5.6 IDENTITY DATA

Track identity, as defined in paragraph 4.4.2.1, is exchanged using the Identity field. Platform and Platform Activity may also be reported in the J3.4I message to further amplify the identity of the reported track in accordance with paragraph 4.4.2.1.3.

4.4.5.7 DISCRETE IDENTIFIER CODE (SPECIAL)

Discrete Identifier Codes (Special) shall be reported in the J7.5 message in accordance with paragraph 4.7.6.5.

4.4.5.8 TRACK QUALITY

Track quality is not applicable to Subsurface surveillance (See paragraph 4.4.5.10.).

4.4.5.9 TIME

The time shall be the time contact was first acquired/time datum established, the time of current positional data, or the time contact was lost. This time shall be reported in the Hour; Minute; and Time Function, ASW fields of the J3.4C1 word.

4.4.5.10 SUBSURFACE TRACK REPORTING RESPONSIBILITY

Subsurface track reporting responsibility procedures are different from those for Air, Surface (Maritime), and Land (Ground) tracks. It is often desirable that more than one JU report the same Subsurface contact using different TNs. This is to ensure continuity of reporting when contact is frequently lost/regained, and to allow comparison of different JUs' data to localize and identify contacts. The following are the R² rules for Subsurface tracks:

a. The first JU to report a contact assumes reporting responsibility for that Track Number. No other JU shall report the contact using that track number, unless one of the following occurs:

(1) A J7.0 (ACT = 0) Drop Track message is received containing the TN.

(2) A J3.4 message containing the TN is not received for two consecutive periodic updates.

b. Any other JU may report what it believes to be the same contact using a different TN. When this is done, only locally derived data shall be reported in the J3.4 message, i.e., the J3.4 messages shall not contain data derived only by the reception of remote data from other IU(s) reporting the same contact.

4.4.5.11 REPORTING INACTIVE INTERFACE UNITS AS SUBSURFACE SURVEILLANCE TRACKS

When a JU determines that a Subsurface IU is no longer active on the interface and the JU also holds local data on the IU, it shall assume R² by reporting a J3.4 Subsurface (Maritime) Track message using the inactive IU address as the reference TN. No other JU shall report the inactive IU using other than the inactive IU address as the reference TN. Should the inactive IU return to the interface as an Active IU, the JU holding R² shall cease reporting the IU, but a J7.0 (ACT = 0) message shall not be transmitted. If a TN has been previously reported on the IU, using other than the IU's address, the J7.2 message may be used to resolve the dual designation to the IU's address.

4.4.5.12 INFORMATION DIFFERENCE RECOGNITION AND RESOLUTION

The exchange of subsurface surveillance information on the interface requires procedures to recognize and resolve detected information differences between local data and data being reported on the interface. Differences are resolved by transmitting the appropriate J7 message. The specific procedures applicable to resolution of those differences are discussed in paragraph 4.7, Information Management. Differences in position, velocity, or depth recognized by a JU are not resolved through automated conflict processing and shall not generate a J7.0 (ACT = 1 or 2) message.

4.4.5.13 TERMINATION OF SUBSURFACE TRACK DATA

The following subparagraphs describe the termination of Subsurface tracks.

4.4.5.13.1 TRANSMISSION OF THE DROP TRACK REPORT MESSAGE

The J7.0 (ACT = 0) message is transmitted when a JU ceases reporting a track except when that track becomes an active IU on the network with the same address as was previously being used as the reference TN. For NOTACK areas, Moving Havens, and FWDAs, a J7.0 (ACT=0) message shall be transmitted at time of deactivation.

4.4.5.13.2 PURGING OF REMOTE TRACKS

There may be cases when a system does not receive a J7.0 (ACT = 0) message and receives no further updates on the remote track. Each system will have the capability to automatically purge those tracks (DRT = 0-3) after a specific time interval. The time interval is a system-selected parameter and should consider the irregular reporting of Subsurface surveillance tracks. Under this condition a J7.0 (ACT = 0) message shall not be transmitted. DATUMS (DRT = 4) shall not be purged automatically.

4.4.6 SPACE AND BALLISTIC MISSILE SURVEILLANCE

The rules and conventions applicable to reporting Ballistic Missile surveillance information are based upon system requirements for exchanging these data between JUs. The J3.6 Space Track message is used to report

Ballistic Missile surveillance tracks. The various requirements associated with Ballistic Missile surveillance data exchange are discussed with the following topics:

- a. Track Reporting Criteria.
- b. Track Reporting.
- c. Launch Point Reporting.
- d. Impact Point Reporting.
- e. Error Reporting.
- f. Track Correlation.
- g. Positional Data.
- h. Velocity.
- i. Covariance Data.
- j. Identity.
- k. Track Quality.
- l. Lost Track Indicator.
- m. Time.
- n. Reporting Responsibility.
- o. Information Difference Recognition and Resolution.
- p. Termination of Ballistic Missile Track Data.

4.4.6.1 BALLISTIC MISSILE TRACK/POINT REPORTING CRITERIA

Ballistic missile track/point reporting criteria are based on requirements for exchanging surveillance information to provide targeting and threat warning information among systems involved in joint operations. JUs reporting Ballistic Missile surveillance information on the interface shall ensure the following:

- a. The information on the ballistic missile track/point is as complete, accurate, and timely as possible.
- b. Data are correlated and dual designation is minimized.
- c. The proper rules for reporting a ballistic missile track/point are followed.

4.4.6.2 BALLISTIC MISSILE TRACK/POINT REPORTING

Ballistic missile track/point reporting requires a set of rules that are general in nature and adaptable to a specific interface configuration which provides for optimum exchange of data. The rules are as follows:

- a. The source of ballistic missile track/point data shall be provided (Source TN).
- b. Established local ballistic missile tracks/points that cannot be correlated with a remote track/point received by the detecting JU shall be reported with all known parameters, except covariance, at the next reporting opportunity.
- c. Ballistic missile data shall be time tagged.
- d. A JU reporting a real-time ballistic missile track shall report the position and associated parameters of the track valid at the time tagged.
- e. If reported, friendly interceptor missile tracks shall be reported on the interface using the J3.2 Air Track message for missiles capable only of endoatmospheric intercepts, and the J3.6 Space Track message for

interceptors capable of exoatmospheric intercepts. When reporting an interceptor missile in the J3.2 message, Platform and Platform Activity shall be reported.

f. A JU with R^2 of a ballistic missile track shall maintain R^2 on the related Impact Point.

g. Upon transmission or reception of a Drop Track Report for a ballistic missile, the JU with R^2 of the Launch Point or Impact Point shall transmit the Impact Point and/or Launch Point messages with the Connect/Disconnect field set to value 1, Disconnect. Any subsequent reports of the Impact Point or Launch Point shall be transmitted with the Related 2 Track Number field Of the J3.0C5 message set to value 0, No Statement.

h. A JU shall not transmit an initial surveillance report on a ballistic missile if the predicted time to impact is less than 16 seconds. Similarly, if the altitude of the descending ballistic missile is less than 8 data miles, an initial Ballistic Missile surveillance report shall not be transmitted. Impact points are not subject to this constraint.

4.4.6.3 BALLISTIC MISSILE LAUNCH POINT REPORTING

a. The J3.0 Reference Point message is used to report the actual or expected Launch Point of a ballistic missile. The Launch Point will normally be derived via back azimuth from a missile track or by sensor detection of a launch. The time of the launch is reported to the nearest second with the Time Function field set to value 4, Departure Time. An early warning indication of an expected launch shall be reported by setting the Time Function field to Departure Time and setting the Hour, Minute, and Second fields to either No Statement or to the expected time of launch. If a missile launch point is related to a specific ballistic missile track it shall be identified in the J3.0C5 Related 2 Track Number field. If the actual launcher is detected by sensors, a J3.2, J3.3, J3.4, or J3.5 message shall be transmitted. If the actual launcher is associated with a launch point, it shall be associated using the J7.7 Association message.

b. The originator of a J3.0 Ballistic Missile Launch Point retains R^2 as long as the originator remains active and reports the point. However, if

a J7.0 (ACT = 0) Drop Track Report message is received, the R^2 unit is declared inactive, or if no periodic update is received for three consecutive update intervals, another IU may, by operator action only, assume R^2 for the point using the same Reference TN. The latest IU to report on a ballistic missile launch point has R^2 for the point.

4.4.6.4 BALLISTIC MISSILE IMPACT POINT REPORTING

The J3.0 Reference Point message is used to report the actual or expected Impact Point of a ballistic missile. The type of warhead, if known, shall be reported in the J3.0C5 Space Amplification field with a measure of the certainty reported in the Amplification Confidence field. The actual or expected time of impact is reported to the nearest second with the Time Function field set to value 3, Arrival Time. A pre-launch indication of an expected Impact Point shall be reported by setting the Time Function field to Arrival Time and the Hour, Minute, and Second fields to either No Statement or to the expected time of impact. If the Impact point is related to a specific ballistic missile track it shall be identified in the J3.0C5 Related 2 Track Number field. A related TN for Impact Point will be used only by the C^2 JU with R^2 for the related missile track. Therefore a change in R^2 of the ballistic missile track also causes a change in R^2 for the related Impact Point. There is no requirement to continue transmitting a missile impact point after predicted impact.

4.4.6.5 BALLISTIC MISSILE LAUNCH/IMPACT POINT ERROR REPORTING

The reliability of ballistic missile launch/impact information is expressed in terms of location accuracy associated with the J3.0C5 Square/Circle Switch, Axis Orientation, Area Major Axis 4, and Area Minor Axis 4 fields. The positional accuracy associated with these fields is defined as the area (dm^2) within which there is a .95 probability that the point is located within the area reported in the Reference Point Message. The Probability estimate shall include the effects of measurement errors, systematic errors, and known maneuvering capabilities used to project launch or impact points.

4.4.6.6 BALLISTIC MISSILE TRACK CORRELATION

Track correlation prevents/eliminates dual designations. The process of correlation consists of comparing locally derived sensor data, e.g., position, velocity, boost indication, etc., with the data received on the interface. In order to eliminate dual designations, it is imperative that each ballistic missile track reported on the interface represent a single data point. Conversely, track decorrelation should occur when it is determined more than one data point exists for a ballistic missile track currently being reported.

The situations most likely to lead to dual ballistic missile designations are as follows:

- a. Initial report on ballistic missile contacts.
- b. Track merging.
- c. Simultaneous multiple launches.
- d. Existence of registration errors.
- e. Time of observation differences.
- f. High velocity contacts.

The implementation of specific ballistic missile track correlation techniques depends on the system capabilities, i.e., manual versus automatic track initiation systems, two-dimensional versus three-dimensional radars, etc. The considerations that must be taken into account in order to reduce/eliminate ballistic missile dual designations are as follows:

- a. Position, time, velocity, boost, and lost track data.
- b. Data registration procedures.
- c. Periodic correlations on all ballistic missile tracks.

d. Track reporting procedures when entering, departing, and reentering the interface.

Each C^2 JU has the responsibility to determine whether the data points being detected by its local sensors are currently reported on the interface and if there are any conflicts between locally derived information and information reported on the interface. To accomplish this, each C^2 JU must continuously correlate locally derived ballistic missile tracks with ballistic missile tracks reported on the Surveillance NPG. Each C^2 JU shall report on all uncorrelated local ballistic missile tracks and shall assume R^2 for those tracks in accordance with the R^2 rules as specified in paragraph 4.4.6.15. In the event of conflict, the C^2 JU shall resolve the difference by transmitting the appropriate J7 message, by operator procedure, or by voice coordination.

4.4.6.7 BALLISTIC MISSILE POSITIONAL DATA

The positional data for ballistic missile tracks are reported in the Space Track message as X, Y, Z position in earth-centered, earth-fixed (ECF) Cartesian coordinates defined by the World Geodetic System-84 (WGS-84) Reference Frame.

4.4.6.8 BALLISTIC MISSILE VELOCITY

The velocity of ballistic missile tracks shall be reported as the rate of change along the X, Y, Z axis.

4.4.6.9 BALLISTIC MISSILE COVARIANCE DATA

The ballistic missile covariance data related to the reported state vector (consisting of the three position coordinates followed by the three velocity values) shall be reported in accordance with the transmit/receive rules for the Space Track Message. When reported, ballistic missile covariance data shall include the best estimate of both tracking errors and statistical estimates of biases produced by emplacement errors, alignment errors, and other systematic errors. Instead of transmitting the covariance matrix directly, ballistic missile covariance data shall be transmitted with the root variances of the covariance matrix and elements of the Cholesky decomposition of the precompensated correlation matrix as defined and

discussed in the following paragraphs. Depending on the sequence of transmitted words, either the covariance matrix, or the spatial covariance submatrix and the velocity covariance submatrix can be constructed from the received data as described in paragraphs 4.4.6.9.10 and 4.4.6.9.11.

The error estimate information of the ballistic missile track, the covariance information, is contained in the J3.6 continuation words. The covariance information can be passed as either full or partial covariance. Full covariance requires the transmitter to perform an encoding process of the full covariance matrix P into the J3.6C1, J3.6C2, J3.6C3, and J3.6C4 words. Partial covariance requires the transmitter to perform two separate encoding processes: (1) The spatial covariance information is encoded into the J3.6C1 word; (2) the velocity information is separately encoded into the J3.6C5 word.

Details of the encoding and decoding process are contained in the follow-on paragraphs. An overview of the encoding/decoding process is as follows (the matrix variables used in the overview are consistent with those used in the detailed explanation):

Overview of Transmitter Encoding.

a. The covariance matrix P is derived from a ballistic missile tracking and error estimation process. Matrix P can be either the full covariance (6×6) terms, or a partial covariance matrix (3×3). In the case of the partial covariance, this process is applied separately to the spatial covariance information (the 3×3 upper left submatrix of P) or the velocity covariance information (the 3×3 lower right submatrix of P). The only difference between the full and partial process is in the number of terms in the matrices.

b. The covariance matrix P is converted to the correlation matrix C . This is done by first taking the square root of each diagonal element, that is the root variance, and dividing each element in the same row and column by that value.

c. The correlation matrix C is converted to a precompensated correlation matrix C' . This is done by multiplying each off-diagonal element

by a constant slightly less than one. Precompensation is performed to "compensate" for small round-off errors introduced by the transmitting unit during message encoding, which might otherwise result in decoding of physically implausible covariance values at the receiving unit. C' is different from C in that the off-diagonal elements have been multiplied by a constant, $1-\epsilon$, where ϵ is a very small number.

d. The precompensated correlation matrix C' is converted by Cholesky decomposition to matrix U . Matrix U is the upper triangular Cholesky factor (or "matrix square root") of C' .

e. Matrix U is then encoded into the J3.6 continuation words. The root variances are logarithmically encoded, and the elements of U are linearly encoded into the appropriate continuation word fields. For elements in the top row of U , only the signs of the number are transmitted.

Overview of Receiver Decoding.

The receiver reverses the transmitter encoding process except for precompensation. The steps to decoding are as follows:

a. The receiver reconstructs matrix U from the J3.6 continuation words. This is done by reversing the linear encoding to reconstruct all but the first row of an approximate Cholesky factor, matrix U . The first row is calculated using the known vector length of each column of matrix U , together with the transmitted signs, to solve for the elements of the first row. Matrix U is now approximately equal to the transmit matrix U , with some round-off induced by the encoding process into the message fields.

b. An approximate correlation matrix C is then constructed. This is done by multiplying matrix U by its transpose. Note that the decoding process does not attempt to reverse precompensation. Reversing precompensation might make matrix C nonpositive definite, the problem precompensation is adjusting for. This correlation matrix C is therefore approximately equal to the transmitter's correlation matrix C and the transmitter's precompensation correlation matrix C' .

c. The covariance matrix P is then constructed from the correlation matrix C. This is done by reversing the logarithmic encoding to find the root variances, and multiplying each row and column of C by the corresponding root variances to get a covariance matrix P. The resulting matrix P is approximate to the covariance matrix P sent by the transmitter due to truncation and round-off errors from the encoding and decoding process.

4.4.6.9.1 DEFINITION OF A COVARIANCE MATRIX

The covariance matrix P is a symmetric 6 x 6 matrix in the form:

$$P = \left[\begin{array}{ccc|ccc} \rho_{xx} & \rho_{xy} & \rho_{xz} & \rho_{xu} & \rho_{xv} & \rho_{xw} \\ \rho_{yx} & \rho_{yy} & \rho_{yz} & \rho_{yu} & \rho_{yv} & \rho_{yw} \\ \rho_{zx} & \rho_{zy} & \rho_{zz} & \rho_{zu} & \rho_{zv} & \rho_{zw} \\ \hline \rho_{ux} & \rho_{uy} & \rho_{uz} & \rho_{uu} & \rho_{uv} & \rho_{uw} \\ \rho_{vx} & \rho_{vy} & \rho_{vz} & \rho_{vu} & \rho_{vv} & \rho_{vw} \\ \rho_{wx} & \rho_{wy} & \rho_{wz} & \rho_{wu} & \rho_{wv} & \rho_{ww} \end{array} \right]$$

P is symmetric about the diagonal. The upper left 3 x 3 quadrant is the "spatial covariance submatrix," where the subscripts x, y, z indicate positions in the X, Y, Z directions in the ECF WGS-84 coordinate system. The lower right 3 x 3 quadrant is the "velocity covariance submatrix" where the subscripts u, v, w indicate the velocities in the X, Y, Z directions in the ECF WGS-84 coordinate system.

The elements of P include tracking errors and statistical estimates of biases produced by emplacement errors, alignment errors and other systematic errors. The size, shape and orientation of the error ellipsoid for the target reported in the J3.6 Space Track message are defined by a six dimensional error ellipsoid.

Let R_a be the actual target state vector ($R_a^t = [X, Y, Z, V_x, V_y, V_z]$), R_e be the tracker's estimate of the target state, and $X = R_e - R_a$ be the track error. Then P shall be a symmetric, positive definite matrix such that the track error is within the following six-dimensional ellipsoid with probability no less than 95 percent:

$$X^T P^{-1} X = 12.5916$$

The value 12.5916 corresponds to the 0.95 quantile of the Chi-squared statistic with six degrees of freedom. Therefore, for normally distributed errors, P is the usual covariance matrix.

If errors are not normally distributed (e.g., if a contribution to the error is uniformly distributed) then P may differ from the covariance matrix (e.g., by linear scaling in the appropriate direction). If the receiver of the message requires a high-confidence region for the target state, it should use an ellipsoid calculated from P under the assumption of normally distributed errors. The intent of the above is that the result will be correct for a confidence of 95 percent.

4.4.6.9.2 DEFINITION OF THE BALLISTIC MISSILE ROOT VARIANCES

The ballistic missile root variances are defined as the square roots of diagonal elements of the ballistic missile covariance matrix defined as follows:

$$\sigma_i = \sqrt{p_{ii}}$$

4.4.6.9.3 DETERMINATION OF THE BALLISTIC MISSILE CORRELATION MATRIX FROM THE BALLISTIC MISSILE COVARIANCE MATRIX

The ballistic missile correlation matrix is a 6 x 6 matrix describing the correlation between the errors of position and velocity. The elements of the ballistic missile correlation matrix are defined as follows:

$$C_{ij} = P_{ij} / \sigma_i \sigma_j$$

where P_{ij} are the elements of the ballistic missile covariance matrix and σ_i and σ_j are the ballistic missile root variances.

4.4.6.9.4 DETERMINATION OF THE BALLISTIC MISSILE PRECOMPENSATED
CORRELATION MATRIX FROM THE BALLISTIC MISSILE CORRELATION MATRIX

The ballistic missile precompensated correlation matrix C' is defined as follows:

$$C' = (1.0 - 2^{-22})C + 2^{-22}I$$

where C is the 6×6 ballistic missile correlation matrix, I is the 6×6 Identity matrix, and C' is the ballistic missile precompensated correlation matrix.

4.4.6.9.5 DEFINITION OF THE CHOLESKY DECOMPOSITION OF THE
PRECOMPENSATED CORRELATION MATRIX

Cholesky decomposition is an algorithm which takes the precompensated correlation matrix C' and returns an upper triangular matrix U such that

$$C' = U^T U$$

where U^T is the transpose of U . The matrix U has the form

$$U = \begin{bmatrix} u_{11} & u_{12} & u_{13} & u_{14} & u_{15} & u_{16} \\ 0 & u_{22} & u_{23} & u_{24} & u_{25} & u_{26} \\ 0 & 0 & u_{33} & u_{34} & u_{35} & u_{36} \\ 0 & 0 & 0 & u_{44} & u_{45} & u_{46} \\ 0 & 0 & 0 & 0 & u_{55} & u_{56} \\ 0 & 0 & 0 & 0 & 0 & u_{66} \end{bmatrix}$$

4.4.6.9.6 CONSTRUCTION OF A CORRELATION MATRIX FROM THE INFORMATION
CONTAINED IN THE J3.6C1, J3.6C2, J3.6C3, AND J3.6C4

Cholesky decomposition takes a precompensated correlation matrix C' and returns a matrix U such that

$$C' = U^T U$$

J3.6C1 through J3.6C4 contain the encoded values of rows 2 through 6 of U, and the signs of elements 2 through 6 of the first row of U. This information is sufficient to reconstruct U. Once U is determined, the correlation matrix can be reconstructed using this equation.

The elements u_{1j} ($j=1,2,\dots,6$) of the first row of U are found by using the fact that the sum of the squares of the elements in each column of U are equal to one:

$$C_{jj} = \sum_{i=1}^j u_{ij}^2 = 1.$$

Solving for u_{1j} ,

$$u_{11} = 1.0$$

$$u_{1j} = \text{sign}(u_{1j}) \sqrt{1 - s_j}, j > 1$$

where

$$s_j = \sum_{i=2}^j u_{ij}^2.$$

If the expression under the square root is negative for the j th column, then u_{1j} is set to zero and the remaining elements of the column are "renormalized":

$$u_{ij} \leftarrow u_{ij} / \sqrt{s_j}.$$

4.4.6.9.7 DEFINITION OF THE CHOLSKY DECOMPOSITION OF THE BALLISTIC MISSILE PRECOMPENSATED CORRELATION MATRIX

The Cholesky decomposition is an algorithm that returns an upper triangular matrix, U, as follows:

$$C' = U^T U$$

where C' is the ballistic missile precompensated correlation matrix defined above. The matrix U is in the following form:

$$U = \begin{bmatrix} u_{11} & u_{12} & u_{13} & u_{14} & u_{15} & u_{16} \\ 0 & u_{22} & u_{23} & u_{24} & u_{25} & u_{26} \\ 0 & 0 & u_{33} & u_{34} & u_{35} & u_{36} \\ 0 & 0 & 0 & u_{44} & u_{45} & u_{46} \\ 0 & 0 & 0 & 0 & u_{55} & u_{56} \\ 0 & 0 & 0 & 0 & 0 & u_{66} \end{bmatrix}$$

4.4.6.9.8 DEFINITION OF THE SPATIAL AND VELOCITY COVARIANCE SUBMATRICES

The spatial covariance submatrix is the upper left 3 x 3 quadrant of the covariance matrix P below. The velocity covariance submatrix is the lower right 3 x 3 quadrant of P. The covariance matrix follows:

$$P = \begin{bmatrix} p_{xx} & p_{xy} & p_{xz} & p_{xu} & p_{xv} & p_{xw} \\ p_{yx} & p_{yy} & p_{yz} & p_{yu} & p_{yv} & p_{yw} \\ p_{zx} & p_{zy} & p_{zz} & p_{zu} & p_{zv} & p_{zw} \\ \hline p_{ux} & p_{uy} & p_{uz} & p_{uu} & p_{uv} & p_{uw} \\ p_{vx} & p_{vy} & p_{vz} & p_{vu} & p_{vv} & p_{vw} \\ p_{wx} & p_{wy} & p_{wz} & p_{wu} & p_{wv} & p_{ww} \end{bmatrix}$$

4.4.6.9.9 DEFINITION OF THE SPATIAL AND VELOCITY CORRELATION SUBMATRICES

The spatial correlation submatrix C_x is the upper left 3 x 3 quadrant of the correlation matrix C below. The velocity correlation submatrix C_v is the lower right 3 x 3 quadrant of C . The correlation matrix follows:

$$C = \begin{bmatrix} C_{xx} & C_{xy} & C_{xz} & C_{xu} & C_{xv} & C_{xw} \\ C_{yx} & C_{yy} & C_{yz} & C_{yu} & C_{yv} & C_{yw} \\ C_{zx} & C_{zy} & C_{zz} & C_{zu} & C_{zv} & C_{zw} \\ \hline C_{ux} & C_{uy} & C_{uz} & C_{uu} & C_{uv} & C_{uw} \\ C_{vx} & C_{vy} & C_{vz} & C_{vu} & C_{vv} & C_{vw} \\ C_{wx} & C_{wy} & C_{wz} & C_{wu} & C_{wv} & C_{ww} \end{bmatrix}$$

4.4.6.9.10 DETERMINATION OF THE PRECOMPENSATED VELOCITY CORRELATION SUBMATRIX FROM THE VELOCITY CORRELATION SUBMATRIX

The precompensated velocity correlation submatrix is defined as follows:

$$C'_v = (1 - 2^{-22}) C_v + 2^{-22} I$$

where C_v is the 3 x 3 velocity correlation submatrix defined above, and I is the 3 x 3 identity matrix.

4.4.6.9.11 DEFINITION OF THE CHOLESKY FACTOR OF THE PRECOMPENSATED POSITION AND VELOCITY CORRELATION SUBMATRICES

The Cholesky factor of the precompensated position correlation submatrix, C'_x , is the upper left 3 x 3 submatrix of the U matrix which was defined in paragraph 4.4.6.9.5.

To determine the Cholesky factor of the precompensated velocity correlation submatrix, C'_v , an upper triangular matrix U_v is constructed such that:

$$C'_v = U_v^T U_v$$

where C'_v is the precompensated velocity correlation submatrix defined above. U_v is in general different from the lower right 3 x 3 submatrix of U . U_v is of the form:

$$U_v = \begin{vmatrix} UV_{11} & UV_{12} & UV_{13} \\ 0 & UV_{22} & UV_{23} \\ 0 & 0 & UV_{33} \end{vmatrix}$$

4.4.6.9.12 CONSTRUCTION OF THE SPATIAL AND VELOCITY CORRELATION SUBMATRICES FROM THE INFORMATION CONTAINED IN THE J3.6C1 AND J3.6C5

J3.6C1 contains the encoded values of rows 2 and 3 of the Cholesky factor U_x of the precompensated spatial correlation C_x , and the signs of elements 2 and 3 of the first row of U_x . (U_x is the same as the upper left 3 x 3 submatrix of U .) This information is sufficient to reconstruct U_x .

J3.6C5 contains the encoded values of rows 2 and 3 of the Cholesky factor U_v of the precompensated velocity correlation submatrix C_v , and the signs of elements 2 and 3 of the first row of U_v . This information is sufficient to reconstruct U_v .

The same procedure is used to reconstruct either submatrix. Cholesky decomposition takes a precompensated correlation submatrix C and returns a matrix U such that:

$$C \approx U^T U,$$

where U^T is the transpose of U . Once U is determined, the correlation submatrix can be reconstructed using this equation.

The elements u_{1j} ($j=1,2,3$) of the first row of U are found by using the fact that the sum of the squares of the elements in each column of U are equal to one:

$$C_{jj} = \sum_{i=1}^j u_{ij}^2 = 1.$$

Solving for u_{1j} ,

$$u_{11} = 1.0$$

$$u_{1j} = \text{sign}(u_{1j}) \sqrt{1 - s_j}, j > 1$$

where

$$s_j = \sum_{i=2}^j u_{ij}^2.$$

If the expression under the square root is negative for the j th column, then u_{1j} is set to zero and the remaining elements of the column are "renormalized":

$$u_{ij} \leftarrow u_{ij} / \sqrt{s_j}.$$

4.4.6.10 BALLISTIC MISSILE IDENTITY DATA

Ballistic Missile identity is exchanged as defined in paragraph 4.4.2.1. The Space Platform Activity and Space Specific Type fields are defined in the message section of this volume. Operational Commander defined values within the Space Specific Type field are defined at initialization via the OPTASK LINK.

4.4.6.11 BALLISTIC MISSILE TRACK QUALITY

Ballistic missile track quality (TQ) is a measure of the reliability of the kinematic data reported on a ballistic missile track determined by the unit reporting the track. It is a numerical value of 0 through 15 indicating

different degrees of reliability of the kinematic data. A value of 0 indicates a nonreal-time report and the values 1 through 15 indicate degrees of reliability with 15 being the most reliable. The algorithm used to derive ballistic missile TQ is as follows:

$$B = \sum_{i=1}^3 \left[\sigma_{p_i}^2(t) + \sigma_{v_i}^2(t)(\Delta t)^2 \right]$$

where $\sigma_{p_i}^2(t)$ represents the positional variance contained in the ballistic missile covariance matrix, $\sigma_{v_i}^2(t)$ represents the velocity variance in the ballistic missile covariance matrix, and $(\Delta t)^2$ is a factor that varies the dependence of the computed TQ on the velocity errors of the reported ballistic missile track. The variable Δt is an arbitrary scaling factor expressed in units of seconds and is specified as an OPTASK LINK variable. The default value of Δt is 6 (0-24,1) seconds. B is the table look-up value.

4.4.6.12 LOST TRACK INDICATOR

A ballistic missile track is considered lost when the JU with R^2 does not receive any local sensor data since the last transmitted update, or the JU determines that the track is lost by other system criteria. Subsequent reports on the ballistic missile track will include data held at the time of last sensor contact, and the Lost Track Indicator field will be set to value 1, Lost Track. Ballistic missile track data will not be extrapolated except as specified in accordance with paragraph 4.4.6.13.

4.4.6.13 TIME FOR BALLISTIC MISSILE TRACKS

Ballistic missile tracks are not extrapolated to time of transmission. All ballistic missile tracks will be time tagged to the integer second nearest to the measurement time, and all position, velocity, and covariance data shall be extrapolated or interpolated to the referenced time. The time accuracy of the extrapolation or interpolation shall be at the limit of system performance with an intent to achieve an accuracy of 0.3 milliseconds or less. Truncation of time without extrapolation or interpolation is not

acceptable. Systems must be prepared to accept data that may have time fields set to future values.

4.4.6.14 NONREAL-TIME BALLISTIC MISSILE TRACK REPORT

A ballistic missile track report is identified as a nonreal-time report with TQ field set to value 0, Non-real Time Track.

4.4.6.15 BALLISTIC MISSILE REPORTING RESPONSIBILITY

R² procedures for ballistic missile tracks are contained in this paragraph. These rules are designed to ensure that only the JU having the best positional and velocity data is reporting the track on the interface. The R² rules are as follows:

a. The first JU to report the ballistic missile track has R² on that track.

b. A JU transmits a track report for a ballistic missile only when it has R² for that track. A JU with R² for a nonreal-time ballistic missile track will relinquish R² upon receiving a remote real-time track report for that track.

c. A JU assumes R² on a ballistic missile track if its local TQ at or before the time of the remote track time tag exceeds the received TQ by 1 or more.

d. A JU reporting a ballistic missile track with the Lost Track Indicator field set to value 1, Lost Track, is assumed to have a TQ of 5 (1-15,1) less than that being reported, i.e., if a JU is reporting "Lost Track" data with a TQ of 15, a JU holding "Tracking" data may assume R² with a TQ of 11 (regardless of the time tag on the remote track).

e. A JU assumes R² if it has not received a remote report on a locally held track for 25 seconds. This rule only applies when the last remote report was received with Lost Track Indicator set to value 0, Tracking.

f. A JU receiving a J7.0 message with the Track Management Action field set to value 0, Drop Track Report, on a locally held track shall assume R^2 at the next opportunity to transmit the track if local reporting eligibility remains and a remote report has not been received on that track.

g. A JU without R^2 for a nonreal-time track, i.e., TQ field set to value 0, shall assume R^2 for that track when the track is locally updated by a new nonreal-time report. A JU reporting a nonreal-time track has R^2 regardless of the time value in the track report. The time value in a nonreal-time report is not a criterion for an R^2 shift.

h. A JU relinquishes R^2 for a real-time track upon reception of a remote track report with TQ greater than local TQ.

i. A JU with R^2 on a track retains the responsibility until it is relinquished in accordance with the above rules or until the track is dropped.

j. After applying all the above rules, a JU relinquishes R^2 for a real-time track upon reception of a remote track report with TQ equal to the local TQ from a JU whose Source TN is greater than the local Source TN.

k. A unit assuming R^2 for a ballistic missile track need not assume R^2 for the associated launch point. The unit no longer holding R^2 on the ballistic missile track may continue to report the launch point in accordance with the transmit/receive rules.

4.4.6.16 BALLISTIC MISSILE INFORMATION DIFFERENCE RECOGNITION AND RESOLUTION

The exchange of Ballistic Missile surveillance information on the interface requires procedures to recognize and resolve detected information differences between local data and data being reported on the interface. Detection and resolution of Identity, Exercise Indicator, Platform, Platform Activity, and Environment/Category differences are resolved by transmitting the appropriate J7 message. The specific procedures applicable to the resolution of those differences are discussed in paragraph 4.7, Information Management.

4.4.6.16.1 BALLISTIC MISSILE SURVEILLANCE DATA DIFFERENCE (POSITION AND VELOCITY)

Differences in ballistic missile position or velocity recognized by a JU are not resolved through conflict processing and shall not generate a J7.0 message with the Track Management Action field set to value 1, Difference Report. However, differences in these elements may cause a JU to assume that one TN represents two different tracks or different TNs are being used to report the same track. (Refer to Resolution of Duplicate Track Number, paragraph 4.1.3.7)

4.4.6.17 TERMINATION OF BALLISTIC MISSILE TRACK DATA

The following subparagraphs describe the termination of ballistic missile tracks.

4.4.6.17.1 TRANSMISSION OF THE DROP TRACK REPORT MESSAGE FOR BALLISTIC MISSILES

The J7.0 message with the Track Management Action field set to value 0, Drop Track Report, is transmitted when a JU ceases reporting a ballistic missile track for which it currently has R^2 , except when a JU ceases reporting a track because it has relinquished R^2 to another JU.

4.4.6.17.2 PURGING OF REMOTE BALLISTIC MISSILE TRACKS

There may be cases when a system does not receive a J7.0 message with the Track Management Action field set to value 0, Drop Track Report, and receives no further updates on the remote ballistic missile track. Each system should have the capability to automatically purge those tracks after a specific time interval. The time interval is a system-selected parameter.

4.4.7 ELECTRONIC WARFARE SURVEILLANCE

Electronic warfare surveillance is the process of developing tactically significant information through the monitoring of the electromagnetic spectrum. The products of the EW surveillance process are lines of bearing (LOBs), fixes, and areas of probability (AOPs). LOBs, fixes, and AOPs are

reported via the J3.7 EW Product Information message on the Surveillance Network PG. LOBs, fixes, and AOPs may be amplified by the J6.0 Amplification message on the Surveillance Network PG. This subsection contains the rules and protocols associated with the exchange of EW surveillance information. Topics covered are as follows:

- a. EW Reporting.
- b. EW Reporting Responsibility.
- c. Time Data.
- d. Information Management.
- e. EW Product Information Correlation.
- f. Termination of EW Surveillance Data.

4.4.7.1 ELECTRONIC WARFARE REPORTING

EW-capable C² JUs and JUs capable of generating and managing track numbers shall determine which EW detections are eligible for transmission on the Surveillance Network PG. This may be done either manually or through automatic association with predetermined reporting criteria. EW detections may result in the transmission of LOBs, AOPs, or fixes.

The word sequences presented to describe EW reporting are the minimum required. Additional continuation words may be added to these word sequences to amplify EW reports if data are available.

4.4.7.1.1 LINE OF BEARING (LOB) REPORTING

The J3.7 EW Product Information Message shall be used to report LOBs derived from various sources such as ES, jam strobes, or radio direction finding (RDF) equipment. The Fix or Bearing Descriptor (FIX BRG) field in the J3.7I word shall be set as follows:

- a. Value 2 - Bearing, Type Not Specified - An LOB for which the reporting JU is unable to specify the bearing as ES, EA, or RDF.
- b. Value 3 - Bearing, ES - An LOB of an intercept obtained from ES sources other than RDF.
- c. Value 4 - Bearing, EA - An LOB specifying a jam strobe.
- d. Value 5 - Bearing, Radio Direction Finding - An LOB of an intercept obtained from RDF sources with no associated parametric data.
- e. Value 7 - Bearing, Unknown - The direction of arrival of the signal is unknown.

LOB reports include the time of the intercept in the J3.7I word. Elevation angles shall only be reported by units who are reporting their PPLI.

If the 2 sigma bearing accuracy (95% probability) of the passive system is available, it should be included in the J3.7C1 word to allow receiving systems to generate AOPs. If an LOB results from an evaluated ES intercept (FIX BRG field set to value 3), the Emitter Number and the Emitter Confidence fields should be set.

4.4.7.1.2 ELECTRONIC WARFARE FIX REPORTING

An EW fix results from the crossing of two or more LOBs and is reported using a J3.7I/J3.7C1/J3.7C2 word sequence as a minimum with FIX BRG field set to value 0 in the J3.7I word. The location of the fix is specified by the latitude and longitude fields in the J3.7C2 word. An EW fix may be derived either automatically or manually. An EW fix resulting from previously reported LOBs shall be assigned a new TN, not one of the TNs assigned to the LOBs. The new TN shall be used for all subsequent updates of the fix. However, when an AOP is changed to a fix, the TN of the previously reported AOP shall be used for the new fix.

4.4.7.1.3 AREA OF PROBABILITY REPORTING

A C² JU or a JU capable of generating and maintaining track numbers may report an AOP based either on organic data, exchange of LOBs, analysis of EW fix data, or a combination of the above. An AOP is defined as that area in which there is a 95% probability (2 sigma) of a particular emitter being located. An AOP is reported using a J3.7I/J3.7C1/J3.7C2 word sequence as a minimum. The J3.7I word shall be transmitted with FIX BRG field set to value 1. The J3.7I word contains the time the AOP was valid and the J3.7C2 word defines the AOP. Refer to paragraph 4.4.3.1.2b for the procedures and the fields used to describe AOPs with the J3.7 message. An AOP resulting from previously reported LOBs shall be assigned a new TN, not one of the TNs assigned to the LOBs. An AOP resulting from two or more previously reported fixes of differing TNs shall be assigned a new TN, not one of the TNs assigned to the fixes. The new TN shall be used for all subsequent updates of the AOP. However, when a fix is changed to an AOP, the TN of the previously reported fix shall be used for the new AOP.

4.4.7.1.4 PLATFORM EVALUATION CONFIDENCE

The Platform Evaluation Confidence field of the J3.7C1 word reports the degree of confidence that the emitter's platform is as reported in the Environment/Category and/or Platform fields.

4.4.7.2 ELECTRONIC WARFARE PRODUCT INFORMATION REPORTING
RESPONSIBILITY

The unit originating a J3.7 EW Fix, AOP, or LOB report always retains reporting responsibility. It is illegal to assume reporting responsibility for another unit's J3.7 EW Fix, AOP, or LOB report. Each unit initiating a J3.7 EW Fix, AOP, or LOB report shall assign a TN not known to be in use on the interface even if it is believed that such a report may concern the same emitter currently being reported in another J3.7 EW Fix, AOP, or LOB report by another unit. The exception is a unit originating a J3.7 EW Fix, AOP, or LOB report on a Fix, AOP, or LOB currently reported by the same unit or received from another unit in a J14.0 message shall assign the same TN, Reference in the J3.7 message as contained in the J14.0 message. The Source TN of these J3.7 messages shall be the Source TN of the unit transmitting the

J3.7 message. J3.7 messages transmitted by nonR² JUs with the Response Indicator set to value 1 shall not affect reporting responsibility.

4.4.7.3 TIME DATA

The J3.7I word contains the time the EW product information reported on the interface was valid; time is expressed in hours, minutes, and seconds.

4.4.7.4 ELECTRONIC WARFARE INFORMATION MANAGEMENT

Upon receipt of a J7.1 (ACT = 1) message or upon receipt of a J7.1 (ACT = 0) message with an EA, ES, or EW Fixes Data Request Indicator set, addressed JUs shall respond as follows (see also paragraph 4.7.2.1.5 and Table 4.7-4):

a. If the J7.1 Addressee TN is set to value 00177, JUs with R² transmit all J3.7 EW data on the TN or as specified by the Request Indicator set to value 1.

b. If the J7.1 Addressee TN is set to own JU, transmit all J3.7 EW data on the TN or as specified by the Request Indicators, with the J3.7 Response Indicator set to value 1.

EW association shall be reported using the J7.7 message. The J7.2 message may be used to correlate EW AOPs with surveillance tracks, but shall not be used to correlate EW LOBs and fixes with surveillance tracks.

Paragraph 4.7.1.2, Difference Report, may be used for E/C, Identity, and Exercise Indicator data reported in J3.7 messages.

4.4.7.5 ELECTRONIC WARFARE PRODUCT INFORMATION CORRELATION

EW AOPs that are reported to the interface may require correlation when they are known or suspected to be detections of a surveillance track. If the EW AOP can be correlated with a surveillance track, a J7.2 correlation message may be transmitted with the Retained TN set to the TN of the track and the Dropped TN set to the TN of the EW AOP.

4.4.7.6 TERMINATION OF ELECTRONIC WARFARE SURVEILLANCE DATA

The transmission of EW product information shall be terminated when the information is no longer valid or time-related update requirements are not met. The information may be purged in accordance with system design.

When a JU drops or ceases reporting EW information, that it has been reporting on the interface, it shall transmit a J7.0 (ACT = 0) message. The J7.0 (ACT = 0) message shall not be transmitted on remote reports. Remote reports may be automatically purged based on system criteria.

4.4.7.7 BEARING ORIGIN

The origin of an EW LOB may be reported in the following ways:

a. Own Unit: The Bearing Origin field shall be set to value 0; the Origin TN field shall be set to own unit's assigned TN; and the J3.7C2 word shall be transmitted containing the latitude and longitude of the bearing origin.

b. Another existing IU, track, or point: The Bearing Origin field shall be set to value 0; the Origin TN field shall be set to the TN of the designated IU, track, or point; and the J3.7C2 word shall be transmitted containing the latitude and longitude of the bearing origin.

c. A designated position: The Bearing Origin field shall be set to value 1; the Origin TN field shall be set to value 0; and the J3.7C2 word shall be transmitted containing the latitude and longitude of the designated bearing origin.

4.4.8 NONC² JU USE OF SURVEILLANCE NPG

To support their missions, nonC² JUs shall monitor the Surveillance NPG; however, they are prohibited from transmitting on this NPG.

Remote surveillance track and point data available in the J3 series messages shall provide nonC² JUs situational awareness and early warning information.

NonC² JUs shall process J7.0 messages with the Track Management Action field set to value 0, Drop Track Report, for locally held remote tracks.

Additionally, nonC² JUs may have the capability to automatically purge locally held remote tracks, after a specified time interval, when these tracks are no longer being updated. The time interval is a system selected parameter.

4.5 ELECTRONIC WARFARE

The following describes the relationship of EW to command, control, and surveillance. Other portions of the Link 16 interface design that support EW are contained in paragraphs 4.4, Surveillance; 4.7, Information Management; 4.10, Mission Management; and 4.11, Weapons Coordination and Management.

4.5.1 DEFINITIONS

Frequently used terms relating to EW are defined below.

4.5.1.1 ELECTRONIC WARFARE

Military action involving the use of electromagnetic energy to determine, exploit, reduce, or prevent hostile use of the electromagnetic spectrum and action that retains friendly use of the electromagnetic spectrum (Joint Pub 1-02). There are three divisions within EW:

a. Electronic Warfare Support - Actions taken to search for, intercept, identify, and locate sources of radiated electromagnetic energy for the purpose of immediate threat recognition. Thus, ES provides a source of EW information required to conduct electronic attack (EA), electronic protection (EP), avoidance, targeting, and other tactical employment of forces (Joint Pub 1-02).

b. Electronic Attack - Actions taken to prevent or reduce an enemy's effective use of the electromagnetic spectrum. EA includes electronic jamming and electronic deception (Joint Pub 1-02).

c. Electronic Protection - Actions taken to ensure friendly effective use of the electromagnetic spectrum despite the enemy's use of EW (Joint Pub 1-02).

4.5.1.2 ELECTRONIC WARFARE SURVEILLANCE (EWS)

EWS is the reporting of EW information to supplement the general surveillance picture.

4.5.1.3 NONELECTRONIC WARFARE COMMAND AND CONTROL JTIDS/MIDS UNITS
(NonEW C²)

NonEW C² JUs are C² units which have no organic EW capability other than to:

- a. Request EWS product information.
- b. Use EWS product information in their own surveillance systems.
- c. Coordinate activities of weapon systems with other C² JUs.
- d. Control nonC² JU weapon platforms.

NonEW C² JUs do not participate in the EW Network PG and the EW control function.

4.5.1.4 COMMAND AND CONTROL ELECTRONIC WARFARE JTIDS/MIDS UNITS

C² EW JUs, in addition to the usual C² functions, possess organic EW processing capability. A C² EW JU has the capacity to collect, coordinate and analyze parametric ES data from the EW Network PG and derive EWS product information for reporting on the Surveillance Network PG. The C² EW JU participates in the EW Network PG to control and coordinate EW activities as well as the Surveillance Network PG(s). Additionally, a C² EW JU may participate on the Mission Management/Weapons Coordination Network PG(s).

4.5.1.5 NONCOMMAND AND CONTROL EW JTIDS/MIDS UNITS

A nonC² EW JU may be either an ES collecting/reporting unit or an EW weapons platform. NonC² EW JUs coordinate with C² EW JUs and/or with one another. They will participate on only the EW Network PG to facilitate the control, coordination, and exchange of EW information.

4.5.2 ELECTRONIC WARFARE COORDINATION PROCEDURES

EW control directs actions to be taken by EW Net participants involving radiated electromagnetic energy. Such actions include, among other things, ES, search, direction finding, track evaluation, and jamming. EW

coordination includes the sharing of data among the EW net participants to provide the most complete evaluation and fixing of intercepted electronic emissions. The J14.2 EW Control/Coordination message is used to accomplish both objectives.

4.5.2.1 ELECTRONIC WARFARE CONTROL INFORMATION EXCHANGE REQUIREMENTS

The information exchange requirements are shown in Table 4.5-1 in relation to the Link 16 messages that support them.

4.5.3 ELECTRONIC WARFARE CONTROL/COORDINATION MESSAGE DESCRIPTION

Messages used to effect EW control and coordination and to report the results of EW requests are described in the following paragraphs.

4.5.3.1 ELECTRONIC WARFARE CONTROL/COORDINATION MESSAGE

The J14.2 EW Control/Coordination message provides the capability to control EW Net participants, to respond to EW Net participants' requests, and to coordinate EW activities among EW Net participants. Any EW Net participant may use the J14.2 message on the EW network. Coordination will be achieved by operational plans or by local procedures using voice or other means. The J14.2 EW Control/Coordination message contains the EW Action Value field which is used to specify a requested action and to report the results of this action. The code in the R/C field of the J14.2I word specifies the required responses to the J14.2 message. The Request Number field in the J14.2 provides an audit trail to ensure continuity between a request and a response. When the Request Number data element is set to zero in the J14.0 message, it identifies the message as an autonomous report. Refer to the J14.2 Message Summary Section 5.3 for the listing of the J14.2 message words and their respective Data Elements.

4.5.3.2 PARAMETRIC INFORMATION MESSAGE

The J14.0 Parametric Information message contains all of the detailed parametric information that may be the result of an ES action.

The unit originating a J14.0 EW Fix, AOP, or LOB report always retains reporting responsibility. It is illegal to assume reporting responsibility for another unit's J14.0 EW Fix, AOP, or LOB report. Each unit initiating a J14.0 EW Fix, AOP, or LOB report shall assign a TN not currently in use on the interface, even if it is believed that such a report may concern the same emitter currently being reported in another J14.0 EW Fix, AOP, or LOB report by another unit. The exception is a unit originating a J14.0 report on an EW Fix, AOP, or LOB which is currently being reported in a J3.7 message by the same or another unit shall assign the same TN, Reference in the J14.0 message as contained in the J3.7 message. The Source TN of these J14.0 messages shall be the Source TN of the unit transmitting the J14.0 message. J14.0 messages transmitted by nonR² JUs with Response Indicator set to value 1 shall not affect reporting responsibility.

The J14.0I word contains the time the parametric information reported on the interface was valid; time is expressed in hours, minutes, and seconds.

Table 4.5-1. Electronics Warfare Control/Coordination Information Requirements (Sheet 1 of 2)

EW ACTION VALUE	TECHNICAL FUNCTION/ MESSAGE	CONTROL/ COORDINATION/J14.2	EW PARAMETER/J14.0	STATUS/J13
	EW INFORMATION EXCHANGE			
0	REQUEST PERIODIC REPORT	X, R*	R	
1	REQUEST AUTOMATIC EVALUATION	X, R*	X, R	
2	REQUEST MANUAL EVALUATION	X, R*	X, R	
3	REQUEST UPDATE AND WATCH	X, R*	R	
4	REQUEST DIRECTED SEARCH	X, R*	R	
5	CANCEL REQUEST	X		
6	CEASE REPORT	X		
7	EMITTER EVALUATION	X		
8	PARAMETER EVALUATION	X		
9	EMITTER ASSOCIATION	X		
10	EMITTER DISASSOCIATION	X		
11	NO FIND	X		
12	RESPONSE TO AN EW REQUEST	X	X	
13	EVALUATE TRACK	X, R*	R	
14	EVALUATE SECTOR	X, R*	R	

LEGEND (U)

(U) X = REQUEST

(U) R = RESPONSE NOT R/C

(U) R* = J14.2 WITH EW ACTION VALUE = 12

TABLE 4.5-1. Electronic Warfare Control/Coordination Information Requirements (Sheet 2 of 2)

EW ACTION VALUE	TECHNICAL FUNCTION/ MESSAGE	CONTROL/ COORDINATION/J14.2	EW PARAMETER/J14.0	STATUS/J13
	EW INFORMATION EXCHANGE			
15	DF REQUEST	X, R*	R	R
16	PROTECT	X	R	
17	JAMMING REQUEST	X		
18	PARAMETER DATA UPDATE REQUEST BY TRACK NUMBER	X		
19	DEPLOY DECOYS	X	R	
20	PARAMETRIC DATA UPDATE REQUEST	X		
21	PARAMETRIC DATA UPDATE ORDER	X, R		
22	REQUEST EW SYSTEM STATUS	X	R	
23	SET EMISSIONS CONTROL	X		
24	IMPLEMENT COOPERATIVE COUNTERMEASURES	X		
25	UNDEFINED	X	R	
26	TRACK NUMBER, REFERENCE/INDEX NUMBER CORRELATION			
27	UNDEFINED			
28	DISUSED	X	R	
29	DISUSED			
30	GUARD			
31	TABOO	X	R	
32-63	UNDEFINED			

LEGEND

X = REQUEST

R = RESPONSE NOT R/C

R* = J14.2 WITH EW ACTION VALUE = 12

4.5.3.3 ELECTRONIC WARFARE CONTROL/COORDINATION PROCEDURES

EW Control and Coordination procedures provide for the control of EW Net participants and the exchange of EW information between EW Net participants. These procedures facilitate conduct of traditional EW functions among the EW capable JUs. Procedures specifically designed for EW Control/Coordination are described in the following paragraphs.

In each of the following cases the addressee will respond to the requesting J14.2 message with the appropriate J14.2 message as required by the R/C procedures specified in paragraph 4.1.7. However, any J14.0 message transmitted automatically within 5 (5-15, 5) seconds in response to a J14.2 message shall suffice in lieu of a WILCO response.

In the following cases when a Reference TN is required, and one is not available, an index number may be used by those JUs incapable of assigning track numbers.

Requests and responses to requests shall be uniquely identified by the combination of Source TN, Addressee TN, and Request Number.

The associations reported in J14.2 EWAC=8, 9, 28, and 29 messages, and disassociation reported in J14.2 EWAC=10, message may be implemented for internal system use only. They need not be originated by operator action, nor displayed to operators.

4.5.3.3.1 REQUEST PERIODIC REPORT

A C² EW net participant will transmit a J14.2 message to an EW Net participant under its control to request periodic reports (on an EW intercept previously reported by the addressed EW Net participant) by specifying the track number in Reference TN, setting EW Action Value to value 0, and setting Periodicity of the Report to one of the following values:

- 1 - Once upon detection.
- 2 - Upon detection and at 1 minute intervals.

- 3 - Upon detection and at 5 minute intervals.
- 4 - Upon detection and at 15 minute intervals.
- 5 - Upon detection and at hourly intervals.
- 6 - Upon detection and in accordance with normal transmit rules thereafter.

The EW net participant (Addressee TN) will respond with a J14.2 (R/C=7) CANTPRO message if it does not have R² for the Reference TN. Otherwise, it will respond with periodic reports using the J14.0 message and the same Reference TN and Request Number value as in the requesting J14.2 message. The C² EW Net participant receiving the periodic reports may initiate the J3.7 Surveillance message on the Surveillance Network PG if the data are tactically significant.

The C² EW Net participant that requested the J14.0 message may cancel the J14.0 message responses by transmitting a J14.2 message with EW Action Value set to value 6.

4.5.3.3.2 REQUEST AUTOMATIC EVALUATION

The J14.2 message with EW Action Value set to value 1 requests an evaluation of parameters contained in the accompanying J14.0 message. To provide continuity between the requesting J14.2 message, the J14.0 parametric message and the responding J14.2 (EWAC=7) message, a Request Number will be provided in each initial word. Parameters considered in the automatic evaluation are Agile Emitter, Frequency/Frequency Range, Modulation Code, Pulse Repetition Frequency/Pulse Repetition Interval, Pulse Width, Jitter, Scan Type, Scan Rate, and Polarization. The responding J14.2 (EWAC=7) message may include the following data elements: Emitter Function, Emitter Number, Mode Number, and Emitter Confidence. Unreported data elements will be represented by No Statement.

4.5.3.3.3 REQUEST MANUAL EVALUATION

The J14.2 message with EW Action Value set to value 2 requests an evaluation of an EW LOB, AOP, or Fix designated by Reference TN, and its parameters as included in a previously reported, or if not previously reported, accompanying, J14.0 message. Based on information obtained from local sensors, comparison of emitter(s) characteristics to intelligence files, and/or information provided by remote sources, Emitter Number, Emitter Function, Mode Number and/or Emitter Confidence values, if determined, are assigned and reported in the responding J14.2 (EWAC=7) message that contains the emitter data.

EWAC=1 and 2 may be functionally combined. They may be designed as a single action, e.g., "Request Evaluation", for origination and display. All evaluation requests may be transmitted as EWAC=2. Upon receipt of either EWAC=1 or 2, the TN and all parameters for which an evaluation is requested may be made available for operator appreciation, with the receiving operator having the capability to select whether an operator (manual) or computer-derived (automatic) evaluation will be made.

4.5.3.3.4 REQUEST UPDATE AND WATCH

The J14.2 message with EW Action Value set to value 3 requests the addressee to make an initial EW report on the specified Reference TN previously reported by the addressee. The length of time the requested update reporting is to be performed may be indicated by Time Duration. If Periodicity of Report is set to value 0 (No Statement), a single report shall be made, and then the addressee shall watch the intercept and report only tactically significant changes. In this case Time Duration must be set to No Statement. Determination of tactical significance shall be an operator function, i.e., after the initial report subsequent updates must be operator initiated. The addressee shall respond with a J14.2 (R/C=7) CANTPRO message if it does not have R² for the Reference TN.

EWAC=3 is a special case of EWAC=0, i.e., it reports at a periodicity of once now and only upon changes considered tactically significant by an operator thereafter. Systems may be designed such that EWAC=0 and 3 are functionally combined. They may be designed as a single action, e.g., "Request Report",

for origination and display, or amplified by a periodicity, which may be a watch request as defined above.

4.5.3.3.5 REQUEST DIRECTED SEARCH

A C² EW Net participant will transmit a J14.2 message with EW Action Value set to value 4 to request an EW Net participant or all EW Net participants to search designated parameters in a specified sector or area at a specified time, and to report the results. The length of time the requested search is to be performed may be indicated by Time Duration. The word sequences required to designate the search parameters listed below are:

- a. Track Number - J14.2I.
- b. Emitter Function - J14.2I/J14.2C3.
- c. Emitter Number - J14.2I/J14.2C3.
- d. Sector - J14.2I/J14.2C1.
- e. Frequency - J14.2I/J14.2C4.
- f. PRI/PRF - J14.2I/J14.2C8.
- g. Bearing - J14.2I/J14.2C1.
- h. Area of Probability (AOP) - J14.2I/J14.2E0/J14.2C2.
- i. Platform Type - J14.2I/J14.2C5.
- j. Latitude/Longitude/Altitude (if available) - J14.2I/J14.2C2.
- k. Known Threats - J14.2I/J14.2C5.

The J14.2E0 word shall be sent immediately after the J14.2I word when either the Immediate Action Indicator, Minute, Hour, or Time Duration needs to be specified.

All of the parameters specified in a single J14.2 message with EW Action Value set to value 4 or in sequential J14.2 messages containing the same Request Number, shall be interpreted together, not constituting separate requests. For example, if Emitter Function, Sector, and Frequency are all designated in a single J14.2, the request means "Search the designated sector for an emitter with the indicated function and frequency". Systems must ensure that conflicting or confusing combinations of parameters are not designated.

Reference TN may be set to No Statement, or to the TN of an area to be searched, or to the TN of an existing track or intercept for which a search is directed. The J14.2 message with EW Action Value set to value 4 shall not be used to direct a search for an existing track in a specified area.

When a sector or bearing search is directed, i.e. when the J14.2C1 word is included, the Bearing Origin field shall be set to value 0 and the Track Number, Origin field shall be set to the TN of Track Number, Addressee; when the message is broadcast the Track Number, Origin field set to No Statement and each receiving JU shall use its own position as the origin of its search sector or bearing. The Receipt/Compliance field shall be set to value 0 for a sector or bearing search addressed to an individual JU, and to value 1 for a broadcast sector or bearing search.

If a J14.2 with R/C set to value 0 directs a search against known threats which are not implemented by the addressee, and no other implemented parameters are designated, the addressee shall transmit a J14.2 CANTPRO (R/C = 7) message with EW Action Value set to value 4.

Upon completion of the search with no results, the addressee will transmit a J14.2 message to the requesting unit containing the same Request Number and Reference TN values as were received, the EW Action Value set to value 11, and the Reference EW Action Value set to value 4. If information is available after the search, the addressee will transmit a J14.2 message to the requesting unit containing the same Request Number value received in the requesting J14.2 message. The data acquired during the search by the addressee will be transmitted to the requesting unit in a J14.0 message with the same Request Number value as was received.

4.5.3.3.6 CANCEL REQUEST

A C² EW Net participant may cancel a previous request by initiating the transmission of another J14.2 message to the same addressee indicating the request number to be cancelled and EW Action Value set to value 5, and Reference EW Action Value set to the EW Action Value of the previous request.

4.5.3.3.7 CEASE REPORT

The J14.2 message with EW Action Value set to value 6 directs the addressee to cease reporting on an EW LOB, AOP, or Fix specified in Reference TN. If the reports were in response to a previous request, Reference EW Action Value shall be set to the EW Action Value of the previous request. If Time Duration is set to a value other than No Statement, the reporting shall only be interrupted for the specified length of time, beginning either immediately after the reception of the J14.2 (Immediate Action Indicator set to value 1) or at a specified time.

4.5.3.3.8 EMITTER EVALUATION

The J14.2 message with EW Action Value set to value 7 provides an initial evaluation or an alteration to the present emitter evaluation, Mode Number, and/or Emitter Confidence of the Reference TN. If the Electronic Warfare Coordinator Indicator (EWC IND) is set to value 1, the evaluation is as directed by the EWC; otherwise the evaluation is as recommended by a nonEWC unit. The J14.2 message with EW Action Value set to value 7 shall be addressed to the collective address 00177 octal, except in response to a J14.2 (EWAC=20) message or a J7.1 message. In either case, R/C shall be set to value 1.

If the emitter evaluation is in response to a J14.2 (EWAC=1 or 2) evaluation request message, the J14.2 (EWAC=7) Request Number and Reference TN fields shall be set to the same values as in the received J14.2 (EWAC=1 or 2) message, and Reference EWAC field shall be set to value 1 or 2, as appropriate.

4.5.3.3.9 PARAMETER ASSOCIATION

The J14.2 message with EW Action Value set to value 8 reports that there is an association between Reference TN and Associated TN, which have similar parametric information, and the detected emissions are deemed to originate from the same emitter. If the EWC IND is set to value 1, the association is directed by the EWC; otherwise, the association is recommended by a nonEWC unit. The J14.2 message with EW Action Value set value to 8 shall be addressed to the collective address 00177 octal except in response to a J14.2 (EWAC=20) message or J7.1 message. In either case, R/C shall be set to value 1.

4.5.3.3.10 EMITTER ASSOCIATION

The J14.2 message with EW Action Value set to value 9 reports that the EW information identified by Reference TN and Associated TN is deemed to be collocated, i.e., emanating from the same platform but not the same emitter. If the EWC IND is set to value 1, the association is directed by the EWC; otherwise, the association is recommended by a nonEWC unit. The J14.2 message with EW Action Value set to value 9 shall be addressed to the collective address 00177 octal except in response to a J14.2 (EWAC=20) message or J7.1 message. In either case, R/C shall be set to value 1.

4.5.3.3.11 DISASSOCIATION

The J14.2 message with EW Action Value set to value 10 reports the disassociation of Reference TN from all existing parameter and/or emitter associations, leaving the remainder of the associations intact. If the EWC IND is set to value 1, the disassociation is directed by the EWC; otherwise the disassociation is recommended by a nonEWC unit. The J14.2 message with EW Action Value set to value 10 shall be addressed to the collective address 00177 octal.

4.5.3.3.12 NO FIND

When the results from a J14.2 request message with EW Action Value set to values 0 through 4, or 13 through 15 are negative, the EW Net participant (addressee) shall respond to the C² EW Net Participant with a J14.2 message

containing the same Request Number, Reference EW Action Value, and Reference TN values as received, and EW Action Value set to value 11. When Reference EW Action Value is 0 or 3, No Find reports that contact has been subsequently lost. Otherwise, No Find reports that no detection has been made. This J14.2 message with EW Action Value set to value 11 shall be addressed to the originator of the request, but R/C shall be set to value 1. A J14.2 (EWAC=11) message shall not be transmitted in response to a J14.2 message addressed to the collective addressee 00177₍₈₎.

4.5.3.3.13 RESPONSE TO AN ELECTRONIC WARFARE REQUEST

EW Action Value set to value 12 in the J14.2 message identifies the accompanying J14.0 message as a positive response to an EW directed action. Request Number and Reference EW Action Value will contain the same values as received in the request message and, if applicable, Reference TN will contain the same value as in the J14.2 request message. If Reference TN in the J14.2 request message was No Statement, Reference TN in this J14.2 and accompanying J14.0 shall be the TN of the data reported. Amplifying data shall be contained in a J14.0 message sequence. The J14.2 message with EW Action Value set to value 12 shall be addressed to the originator of the request, but R/C shall be set to value 1.

4.5.3.3.14 EVALUATE TRACK

A J14.2 message with EW Action Value set to value 13 directs the addressee to evaluate the sector specified in Sector Width, which is centered on the bearing between the receiving JU and the Reference TN, and whose origin is the receiving JU, and to report EA intercepts for the duration of the time specified in Time Duration. If Time Duration is No Statement, a one-time report is requested. If Sector Width is No Statement, a 360° search is requested. A search for specific jammers can be directed by specifying the jammer in Emitter Number, or a search within a particular frequency/frequency range and/or PRF/PRI can be directed by specifying the frequency/frequency range and/or PRF/PRI in the applicable fields. Origin TN in the J14.2C1 word must be set to No Statement, and Bearing and Bearing Origin must be set to their default values and not processed upon receipt. A unit may service multiple track evaluation requests. However, if a servicing unit is limited in capability to one request at a time per requesting unit, and a second

track evaluation request is received from the same requesting unit, the servicing unit shall only service that unit's latest request. If the latest request causes the total number of evaluations that the unit can service simultaneously to be exceeded, the oldest request is cancelled and the new request is serviced.

4.5.3.3.15 EVALUATE SECTOR

A J14.2 message with EW Action Value set to value 14 directs the addressee to evaluate the sector specified in Sector Width, which is centered on the bearing specified in the Bearing field, and whose origin is the receiving JU, and to report EA intercepts for the duration of the time specified in Time Duration. If Time Duration is No Statement, a one-time report is requested. If Sector Width is No Statement, a 360° search is requested. Reference TN shall be set to zero. A search for a specific jammer can be directed by specifying the jammer in Emitter Number, or a search within a particular frequency/frequency range and/or PRF/PRI can be directed by specifying the frequency/frequency range and/or PRF/PRI in the applicable fields. A unit may service multiple sector evaluation requests. However, if a servicing unit is limited in capability to one request at a time per requesting unit, and a second sector evaluation request is received from the same requesting unit, the servicing unit shall only service that unit's latest request. If the latest request causes the total number of evaluations that the unit can service simultaneously to be exceeded, the oldest request shall be cancelled and the new request shall be serviced.

EWAC=13 and 14 may be combined. They may be designed as a single action, e.g., "Evaluate Jamming", for origination and display, with the originating operator having the capability to specify a track which is suspected of jamming. If no track is specified, the operator must have the capability to specify a bearing originating from the addressee. If no track or bearing is specified by the operator, the evaluation shall be omnidirectional, and a J14.2 (EWAC=14) message with Bearing = 0 and Sector Width = 180 shall be transmitted.

4.5.3.3.16 DIRECTION FINDER (DF) REQUEST

A C² EW Net participant will transmit a J14.2 message with EW Action Value set to value 15 to an EW Net participant under its control to initiate a DF search. Identification of the objective may be specified either by Reference TN or by frequency/frequency range. The specific time to take the DF action shall be specified in Hour, Minute, and Second of the J14.2E0 word. Upon completion of the DF action, a J14.0 message with the same Request Number as the requesting J14.2 will be used to report the bearing information. This J14.0 message shall be preceded by a J14.2 message with EW Action Value set to value 12 containing the same Request Number and with Reference EW Action Value set to value 15. The DF request may be promulgated to a group of EW Net participants via the collective address. Based on bearing information from various reporting units, the C² EW JU may report an EW fix in a J3.7 message.

4.5.3.3.17 PROTECT REQUEST

The J14.2 message with EW Action Value set to value 16 and a frequency/frequency range specified by the J14.2C4 word requests that a friendly frequency/frequency range used for a particular operation shall be protected in order to prevent it from being inadvertently jammed by friendly forces while active EW operations are directed against hostile forces. The time and time duration of this frequency protection may be specified by Hour, Minute, and Time Duration of the J14.2E0 word; if no time and no time duration are specified, the frequency/frequency range protection shall last from the time of reception of the J14.2 message until either an appropriate cancel request is received or until a new protection for this frequency/frequency range is ordered. J14.2 messages containing this EW Action Value may be transmitted on both the EW NPG and the Weapons Coordination and Management NPG.

4.5.3.3.18 JAMMING REQUEST

The J14.2 message with EW Action Value set to value 17 initiates a jamming request against a specified emitter/platform, frequency/frequency range, track, or known threats in a specified sector, area or at a specified position to a specific JU, or directs the cessation of this kind of jamming. The time and time duration of the jamming may be specified in the J14.2E0

word; if no time and no time duration are specified, the jamming shall last from the time of reception of the J14.2 message until either an appropriate cancel request is received or a new jamming request for the specified emitter/platform, frequency/frequency range, track, or known threats in the sector, area, or at the position specified is ordered, or until tactically no longer required.

For jamming requests, the specific jamming to be accomplished is specified in various ways by the setting of the fields in the J14.2 message as follows:

- a. Reference TN: "Jam Reference TN".
- b. Bearing: "Jam on the bearing" (or if Sector Width is specified, "in the sector" which is centered on the bearing specified in the Bearing field, and whose origin is the receiving JU, or "in the specific direction", if Elevation Angle is included).
- c. Position (specified by Latitude, Longitude, and Altitude (if available): "Direct jamming at the specified position."
- d. Area (specified in the J14.2C2 word): "Jam in the specified area."
- e. Emitter Number: "Jam the specified emitter."
- f. Frequency: "Jam the frequency, or frequency range."
- g. Specific known threats (as identified in the fields of the J14.2C5): "Jam all threats of the Nationality, Environment/Category, Platform, Activity, and/or Specific Type specified" or "Jam the threat identified by Local Discrete Identifier." Reference TN must be set to No Statement when this method of specifying jamming is used. If Local Discrete Identifier is specified, all other fields of the J14.2C5 must be set to No Statement.

All of the fields of the J14.2 which are specified shall be interpreted together as a single jamming request. For example, if Bearing and Frequency are specified, the addressed JU is requested to jam that frequency on the specified bearing.

The cessation of jamming is ordered by the J14.2 with EW Action Value set to value 17, and Automatic EA Negation set to value 1 and Request Number and Reference TN, if applicable, set to the same values used in a previous jamming request addressed to Addressee TN. The time of cessation can be ordered either by specifying a certain time in Hours, Minutes, and Seconds or by setting the Immediate Action Indicator to value 1. If all of these fields are No Statement, cessation of jamming is ordered immediately. When Automatic EA Negation is set to value 1, none of the J14.2 continuation words shall be transmitted.

4.5.3.3.19 DEPLOY DECOYS

The J14.2 message with EW Action Value set to value 19 orders the deployment of decoys in a specified sector or area. The type of decoys shall be specified in Decoy Type in the J14.2E0 word. The time and time duration of the decoy deployment may be specified in the J14.2E0 word; if no time and no time duration are specified, the decoy deployment shall last from the time of reception of the J14.2 message until either an appropriate cancel request is received or a new request for deployment of decoys for the specified sector or area is ordered, or until tactically no longer required.

J14.2 messages containing this EW Action Value may be transmitted on both the EW NPG and the Weapons Coordination and Management NPG. Other amplifying information about deployment is specified as follows:

- a. Position or area in which decoys are to be deployed using the J14.2C2 word.
- b. A corridor or sector along which decoys are to be deployed, specified as a line of bearing (with sector width if a sector) using the J14.2C1 word.
- c. The frequency or frequency range to be decoyed using the J14.2C4 word.

The cessation of decoy deployment is ordered using the J14.2 with EW Action Value set to value 19 with Automatic EA Negation set to value 1 and Request Number set to the same value used in the previous order for deployment of

decoys addressed to Addressee TN. The time of cessation can be ordered either by specifying a certain time in Hours, Minutes, and Seconds or by setting the Immediate Action Indicator to value 1. If all of these fields are No Statement, cessation of decoy deployment is ordered immediately.

4.5.3.3.20 PARAMETRIC DATA UPDATE REQUEST

The J14.2 message with EW Action Value set to value 20 requests that all EW parametric data which is not periodically updated at normal intervals be reported. Addressed units shall respond as follows:

a. If Addressee TN is set to value 00177 octal, transmit all J14.0 data which own JU is reporting in response to a J14.2 (EWAC=0) message with Periodicity of Report set to value 3, 4, or 5, or a J14.2 (EWAC=3) message, with the J14.0 Response Indicator, EWAC set to value 1. These J14.0 messages shall not be preceded by a J14.2 message with EW Action Value set to value 12, nor shall a J14.2 message with EW Action Value set to value 11 be transmitted by JUs which do not have R^2 for any J14.0 data. Transmit all J14.2 messages with EW Action Value set to values 7, 8, or 9 which own JU has originated and for which the evaluation or association is still effective. Those J14.2 messages shall be addressed to the requesting unit, with R/C set to value 1.

b. If Addressee TN is set to own JU's address, transmit J14.0 data which own JU is reporting in response to a J14.2 (EWAC=0) message with Periodicity of Report set to value 3, 4, or 5, or a J14.2 (EWAC=3) message with the J14.0 Response Indicator, EWAC set to value 1. These J14.0 messages shall not be preceded by a J14.2 message with EW Action Value set to value 12. Transmit all locally held EW evaluations and associations in J14.2 messages with the EW Action Value set to values 7, 8, or 9. These J14.2 messages shall be addressed to the requesting unit with R/C set to value 1.

4.5.3.3.21 SET EMISSIONS CONTROL

Upon receipt of a J14.2 message with EW Action Value set to value 23, the addressed JU shall set the EMCON specified in Plan Source and Plan Number, at the time specified, or immediately, as indicated by the Immediate Action Indicator in the J14.2E0 word. The duration of the EMCON may be specified,

also. The Addressee TN can be either an individual or a collective address. J14.2 messages containing this EW Action Value may be transmitted on both the EW NPG and the Weapons Coordination and Management NPG.

4.5.3.3.22 TRACK NUMBER, REFERENCE/INDEX NUMBER CORRELATION

A C² EW JU will initiate a J14.2 message with EW Action Value set to value 26 to inform an EW Net participant that a track number has been assigned to the index number initiated by that Net participant. Upon receipt of a J14.2 message with EW Action Value set to value 26, the addressee will accept the track number specified in Reference TN for the track that has been identified by the index number specified in the J14.2 message. The Addressee TN shall then transmit a J14.0 containing the Reference TN with all current available data as a means of informing all other JUs on the EW NPG of the correlation.

4.5.3.3.23 GUARD REQUEST

The J14.2 message with EW Action Value set to value 30, and a frequency/frequency range specified by the J14.2C4 word indicates that this frequency/frequency range is currently being exploited for combat information and/or intelligence and therefore shall not be interfered with by friendly forces. The time and time duration of frequency protection may be specified by Hour, Minute, and Time Duration of the J14.2E0 word; if no time and no time duration are specified, the frequency/frequency range protection shall last from the time of reception of the J14.2 message until either an appropriate cancel request is received or until a new guard request for this frequency/frequency range is ordered. J14.2 messages containing this EW Action Value may be transmitted on both the EW NPG and the Weapons Coordination and Management NPG.

4.5.3.3.24 TABOO REQUEST

The J14.2 message with EW Action Value set to value 31, and a frequency/frequency range specified by the J14.2C4 word indicates that this frequency/frequency range is of such importance that it must never be deliberately jammed or interfered with by a friendly force. The time and time duration of frequency protection may be specified by Hour, Minute, and Time Duration of the J14.2E0 word; if no time and no time duration are

specified, the frequency/frequency range taboo shall last from the time of reception of the J14.2 message until either an appropriate cancel request is received or until a new taboo request for this frequency/frequency range is ordered. J14.2 messages containing this EW Action Value may be transmitted on both the EW NPG and the Weapons Coordination and Management NPG.

4.5.4 TERMINATION OF ELECTRONIC WARFARE PARAMETRIC DATA

When a JU stops reporting EW information that it has been reporting on the EW NPG, it may transmit a J7.0 (ACT = 0) message on the EW NPG.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

4.6 AMPLIFICATION

Amplification information is exchanged in the J6.0 Amplification message.

The J6.0 Amplification message is used to report information gained by collection techniques; i.e., other than those normally associated with data link information reporting (radar and sonar contacts and EW detections), about surveillance tracks or points that are being reported in other messages. Any unit may use this message to provide amplifying information on an existing track or point.

This amplifying information is transmitted by the JU deriving the information and is independent of track reporting and R^2 . The SPI field in the J6.0I Amplification initial word indicates whether the information contained in the J6.0 message requires special processing. The SPI field for this information is independent of the basic track message. Additionally, the SPI field value must be maintained when information received requires special processing and that information is retransmitted, unless all of the retransmitted information is derived by local means and does not require special processing or a determination has been made that special processing is no longer required. R^2 , as defined for track messages, is not used for information reported in the J6.0 Amplification message. Any JU having information may report the most current local information and may report the latest data link information received for which no locally derived information is available.

The procedures for reporting amplification information are described below.

4.6.1 AMPLIFICATION INFORMATION

The TN of the track or point which is being amplified is contained in the J6.0I word. The specific type and activity amplification index of that TN are reported in the J6.0E0 word. When reporting the current activity of the track or point, the latest available information is reported redundantly in accordance with the message transmission rules. A change in the current activity shall interrupt the redundant transmissions. The capability exists in the J6.0 message to report pairings or engagements between any two TNs regardless of their environment/category. Even though this capability exists, it shall not be used to report pairings or engagements which are

specified for reporting in the J10.6 Pairing message and the J10.2 Engagement Status message. Systems shall not allow the J6.0 messages that report pairings or engagements to overlay or replace pairings or engagements established by the J10.6 and J10.2 messages. When the display of both types of pairings or engagements is implemented, they must be unique so as to avoid operator misinterpretation.

4.6.2 RESET

The Reset To No Statement value is transmitted only as a result of operator action. It is provided to permit operators to change a reported nonzero value, in applicable fields except the TN field, to No Statement when the reported nonzero value is determined to no longer be valid because of erroneous entry; aging of data to such an extent that it is no longer tactically significant; the reporting process is no longer occurring; etc., and no other nonzero value for that particular field is appropriate for transmission. When a system can no longer support the continued reporting of the J6.0 message data due to reasons not associated with the degree of validity of the data, such as dropping the tracks due to display considerations, technical limitations as to number of tracks on which such data can be reported, etc., the Reset To No Statement value shall not be transmitted.

4.6.3 FILTERING OF AMPLIFICATION DATA

Systems implementing the transmission of the J6.0 message should have the capability to filter these messages based upon the setting of the SPI field. If the SPI field is set in the J6.0I word and a security filter exists on a specific link, the J6.0 message shall not be sent on that link even if a track alert exists on the associated track data. If it is determined that the J6.0 message data are to be transmitted or forwarded on a link that has a security filter, the SPI field must be set to zero or the security filter must be removed. The determination to transmit or forward the J6.0 message data will be controlled by the interface operating procedures.

4.6.4 TERMINATION OF AMPLIFICATION DATA

The transmission of Amplification data shall be terminated when the track or point being amplified is no longer being reported on the interface. The information may be purged in accordance with system design.

4.6.5 RESPONSE INDICATOR

When the J6.0 message is being retransmitted as a result of a J7.1 Data Update Request message, the Response Indicator field shall be set to 1.

4.6.6 AMPLIFICATION OF J6.0 AMPLIFICATION REQUIREMENTS

The following paragraphs provide additional clarification of the primary purpose of certain J6.0 data fields.

4.6.6.1 TRACK NUMBERS

All track numbers contained in J6.0 messages must exist on the interface in other than J6.0 messages, i.e., the J6.0 messages shall not be used to originate a track. The primary purposes of the three J6.0 TN fields are as follows:

a. The Reference TN is the track or point about which the amplifying information applies.

b. The Objective TN is a track or point that is being targeted by the Reference TN. The specific targeting action being taken by the Reference TN against the Objective TN may be reported in the Activity Amplification Index field (see paragraph 4.6.6.2).

c. The TN of the Controlling Agency of the Reference TN is a track or point that is controlling or providing direction to the Reference TN.

4.6.6.2 ACTIVITY AND ACTIVITY AMPLIFICATION INDEX (AAI)

The Activity field reports the activity currently being conducted by the Reference TN. The AAI field reports additional information about the current

activity of the Reference TN. The meaning of these two fields depends on the Environment/Category (E/C) of the Reference TN. Activity need not be reported when reporting AAI, i.e., Activity may be zero when AAI is nonzero. Note that the first ten values (1-10) of AAI for each E/C report actions normally associated with engagement. Furthermore, the first ten values of Air and Land AAI are specifically designed to represent a normal engagement sequence.

4.6.6.3 LOCAL DISCRETE IDENTIFIER (LDI)

The LDI field is used to report a number between 1 and 4094, the meaning of which has been promulgated separately by Operation Order or other means. The LDI field provides additional amplifying information about the Reference TN. It may be used for any such purpose deemed necessary by the operational commander, although its use will normally be confined to supporting the amplification reporting function. The J6.0 and J14.0 LDI fields are independent of each other, i.e.; the operational commander may promulgate two separate LDI lists, one to support amplification reporting and another to support EW reporting, or the operational commander may specify identical LDI lists for the J6.0 and J14.0. If the Reference TN is being reported in both a J6.0 and J14.0 message, the LDI field reported in each need not be the same. Also, the J6.0 and J14.0 LDI fields are independent of the J7.5 Special Code I, II, III fields. The Special Code fields are used for a similar purpose as the LDI fields, but are normally for general use rather than supporting amplification or EW reporting. However, an operational commander may specify identical Special Code and LDI lists.

4.6.7 CONFLICTS BETWEEN J6.0 DATA AND OTHER DATA

J6.0 information shall be independent of data reported in other messages, except the TNs. There is no intent to protect against or to report conflicts. For example, the Platform and/or Platform Activity of the Reference TN reported in a J6.0 message need not be the same as, or even consistent with, the Platform and/or Platform Activity reported for the Reference TN in J3 series messages. The protocols in paragraphs 4.7.1.2 for Data Differences and 4.7.1.3 for Change Data Orders do not apply to J6.0 data. However, differences between the locally held Surveillance E/C and the locally derived E/C shall be resolved before originating or updating

amplification information. If the unit originating amplification information also has R^2 for the reference TN, the reported Surveillance E/C and the E/C reported in the J6.0 message must be the same. If the unit does not hold R^2 for the Reference TN, it shall either change the E/C reported in the J6.0 message to that reported by the R^2 unit, or transmit a J7.0 (ACT = 1) E/C Difference Report, and shall not transmit the J6.0 Amplification message until a track report is received with the same E/C as the locally derived E/C reported in the J6.0 message. If the received J6.0 E/C does not match the E/C of the held TN, the J6.0 message shall be discarded.

4.6.8 PROCESSING AMPLIFICATION DATA FROM MULTIPLE DATA SOURCES

Processing of amplification data upon receipt is a system option, subject to the J6.0 message Minimum Implementation requirements and Receive Rules, and the forgoing rules in this section. Therefore, if remote J6.0 data are received from multiple sources about the same track, systems may choose to store and display the data from any or all of these sources, and select the data to be retained either automatically or manually.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

4.7 INFORMATION MANAGEMENT

Data management procedures are required to insure that all systems can properly exchange information when operationally interfaced. These procedures are accomplished through the use of Information Management messages. These messages are provided to clarify, correct, and control the flow of data when necessary. The Information Management messages are:

- a. J7.0 Track Management message.
- b. J7.1 Data Update Request message.
- c. J7.2 Correlation message.
- d. J7.3 Pointer message.
- e. J7.4 Track Identifier message.
- f. J7.5 IFF/SIF Management message.
- g. J7.6 Filter Management message.
- h. J7.7 Association message.
- i. J8.0 Unit Designator message.
- j. J8.1 Mission Correlator Change message.

4.7.1 TRACK MANAGEMENT

The J7.0 message is used to effect the following management actions on the interface:

- a. Dropping or ceasing to report a track.
- b. Reporting differences in Environment/Category and/or ID.
- c. Changing Environment/Category and/or ID.

- d. Setting or changing the alert indicators.
- e. Changing the Strength fields.
- f. Changing of Exercise status.

4.7.1.1 DROP TRACK REPORT

The J7.0 (ACT = 0) Drop Track Report message is transmitted by the JU with R^2 to indicate that the JU with R^2 specified in the Source TN field has dropped or has ceased reporting the track specified in the Reference TN field. A J7.0 (ACT = 0) message shall not be sent when a track is no longer being reported due to a shift in R^2 .

4.7.1.2 IDENTITY (ID) AND ENVIRONMENT/CATEGORY (E/C) DIFFERENCE REPORT

The exchange of Surveillance data requires procedures to recognize and resolve differences in ID and Environment/Category. The J7.0 (ACT = 1) Difference Report message indicates that the JU specified in the Source TN field has local Environment/Category, ID, Identity Amplifying Descriptor, or Exercise Indicator data information different from that currently being reported on the track specified in the Reference TN field. The J7.0 (ACT = 1) Difference Report may also indicate that the transmitting JU has different data in the Platform and/or Platform Activity fields; however, differences in these fields shall be included only when differences in the Environment/Category, Identity, Exercise Indicator, or Special Interest Indicator are also being reported for the specified track.

When a JU receives a Surveillance message or a J7.0 (ACT = 1) message in which the air, surface (maritime), or land (ground) Environment/Category and ID are different from the local Environment/Category and ID, the Environment/Category conflict shall be processed and resolved prior to the resolution of the ID conflict. That is, if an Environment/Category conflict is detected, no further processing to detect an ID conflict need occur.

When a JU receives a Surveillance message in which the Exercise Indicator is different from local Exercise Indicator data or a J7.0 (ACT = 1) message in which the Exercise Indicator is different from the local Exercise Indicator,

a conflict exists and the operator shall be alerted for manual resolution. Exercise Indicator conflicts will be resolved prior to ID or Identity Amplifying Descriptor Conflict resolution. Identity Amplifying Descriptor conflicts are processed in the same manner as ID conflicts.

4.7.1.2.1 ENVIRONMENT/CATEGORY CONFLICTS

Only the following Environment/Category changes/differences shall be reported on the interface:

- a. Space to air.
- b. Air to space, surface (maritime), land (ground).
- c. Surface to air, subsurface (maritime).
- d. Subsurface (maritime) to surface (maritime).
- e. Land (ground) to air, surface (maritime).
- f. Unknown to space, air, surface (maritime), subsurface (maritime), land (ground) (applicable to EW reports only).

When a JU changes the Environment/Category of a track, as specified above, or when a difference report is rejected by an operator action, the information shall be reported as follows:

- a. If a JU has R^2 , the local Environment/Category shall be transmitted in the appropriate Surveillance report.
- b. If a JU does not have R^2 , the local information shall be transmitted in the J7.0 (ACT = 1) message for conflicts.

When an R^2 JU changes the Environment/Category of a surveillance entity, either as a result of operator initiative or acceptance of a J7.0 (ACT=1) Difference Report or (ACT=2) Change Data Order, the decision to retain the original TN or report the entity with a new TN shall be in accordance with paragraph 4.4.2.8 and the rules specified in Table 4.7-1.

If the locally held Environment/Category of a track is different from the Environment/Category received in a J3.X or a J7.0 (ACT = 1) message for that track, the operator shall be alerted (see Table 4.7-1). This alert shall be provided even in those cases where the received Environment/Category is not implemented.

If the local data and the received data differ as to whether the TN is assigned to a point or to a track, the operator shall be alerted.

4.7.1.2.2 IDENTITY DIFFERENCE RESOLUTION

ID differences occur when a JU holds a local ID on a track (local data) which differs from the ID being reported on the interface (remote data). Interface procedures are required to recognize and resolve these ID differences. All IUs should hold the same ID (common ID) for a given track, and any evaluated change by an operator to this common ID should be accommodated by the interface. Table 4.7-2 presents the framework for processing these Identity differences. An ID conflict exists when the ID difference cannot be automatically accepted or rejected. In the case of ID conflicts, these differences must be presented to the operators for their evaluation. These conflicts may also require voice coordination for final resolution. Operator alerts and actions not specifically required by procedures included in this section are system options at any time. Receipt of ID data on a TN for which the receiving JU does not have R^2 and local positional data is not held will automatically be accepted and the remote ID placed in the database for retention.

TABLE 4.7-1. Environment/Category Difference Resolution and Track Number Continuity on Change of Entity Type

New	SPACE TRK	AIR TRK	SURF TRK	SUB TRK	LAND TRK	LAND PT	EW FIX (1)	EW AOP (1)	ASW R/B	ASW POINTS
Current										
SPACE TRK	N/A	S	X	X	X	X	N	N	X	X
AIR TRK	S	N/A	S	X	S	X	N	N	X	X
SURF TRK	X	S	N/A	S	S	X	N	N	N	N (3)
SUB TRK	X	X	S	N/A (4)	X	X	N	N	N	N (3)
LAND TRK	X	S	S	X	N/A	N	N	N	X	X
LAND PT	N	N	N	N	N	N/A	N	N	X	X
EW FIX (1)	N	N	N	N	N	S	N/A	(2)	X	X
EW AOP (1)	S	S	S	S	S	S	S	N/A	X	X
ASW R/B	X	X	S	S	X	X	X	X	N/A	N
ASW POINTS	X	X	N (3)	N (3)	X	X	X	X	N	N/A

LEGEND

- S = SAME TN. LEGAL CHANGE OF ENV/CAT; ORIGINAL TN IS RETAINED AND ENTITY IS REPORTED IN THE APPROPRIATE J3.X SURVEILLANCE MESSAGE. RECEIVING JUS SHALL ALERT THE OPERATOR TO THE ENV/CAT CHANGE. IF A CHANGE OF ENV/CAT IS PROPOSED BY J7.0 (ACT=1) MESSAGE, ACCEPTANCE OR REJECTION OF THE RECEIVED DATA BY THE R² JU SHALL BE BY MANUAL ACTION. A JU'S DATA SHALL NOT BE CHANGED UNTIL AFTER ACCEPTANCE BY THE R² JU OPERATOR.
- N = NEW TN. LEGAL CHANGE OF ENV/CAT; NEW TN MANDATORY. IF THE ENV/CAT CHANGE HAD BEEN PROPOSED BY J7.0 (ACT=1) MESSAGE, ACCEPTANCE OR REJECTION OF THE DATA BY THE R² JU SHALL BE BY MANUAL ACTION. IF THE PROPOSED ENV/CAT CHANGE IS ACCEPTED BY THE R² JU IT SHALL TRANSMIT A J7.0 (ACT=0) DROP TRACK MESSAGE FOR THE ORIGINAL TN AND REPORT THE ENTITY AS A NEW TN IN THE APPROPRIATE J3.X SURVEILLANCE MESSAGE OR J5.4 MESSAGE. A JU'S DATA SHALL NOT BE CHANGED UNTIL AFTER ACCEPTANCE BY THE R² JU'S OPERATOR.
- X = ILLEGAL ENV/CAT CHANGE SPECIFIED BY PARAGRAPH 4.7.1.2.1. IF RECEIVED REJECT DATA.

NOTES

1. THE EW ENTITIES IN THE TABLE REFER ONLY TO EW PRODUCTS TRANSMITTED IN THE J3.7 MESSAGE.
2. IF AN AOP IS FORMED FROM A SINGLE FIX, THE SAME TN SHALL BE RETAINED; IF AN AOP IS FORMED FROM 2 OR MORE FIXES, A NEW TN SHALL BE ASSIGNED.
3. APPLICABLE ONLY TO ASW POINTS/POINT AMP AS FOLLOWS: POINT TYPE 7, POINT AMPLIFICATION 1 (SINKER), 2 (BRIEF CONTACT), 4 (ESTIMATED POSITION (EP)), 5 (FIX (ASW)) AND 12 (AREA OF PROBABILITY (ASW)); OTHERWISE X.
4. FOR DATA REPORT TYPE 4 (DATUM), THE SAME TN MAY BE USED BY OPERATOR ACTION.

a. Reporting of Local ID data Changes. Changes to local ID data will be reported on the interface in accordance with the following rules.

(1) The R^2 unit will transmit the changed identity in the appropriate surveillance message at the next transmit opportunity. The Identity Difference Indicator shall be set to value 0.

(2) All other interface units will report the changed ID in a J7.0 (ACT = 1) Difference Report message. If the interface unit is in control but does not have R^2 for the Reference TN the resultant J7.0 (ACT = 1) will have the Controlling Unit Indicator field set to value 1.

b. Processing of ID Difference Reported in a Surveillance Message. When the ID reported in a surveillance message is different from local data, interface units shall take the following actions:

(1) Controlling Unit. The controlling unit of the track shall automatically reject the received ID data and transmit a J7.0 (ACT = 1) message with own unit data, and with the Controlling Unit Indicator field set to value 1. These actions are taken without regard to the setting of the Identity Difference Indicator in the surveillance message.

(2) Other Non R^2 Units.

(a) If the Identity Difference Indicator is set to value 0, the difference shall be resolved in accordance with Table 4.7-2. If directed to automatically accept the remote ID, the system shall update the local ID with the remote ID. If directed to automatically reject the remote ID, the system shall transmit a J7.0 (ACT = 1) with local data. In all other cases the non R^2 unit's operator shall be alerted and the ID conflict will be resolved by operator action.

(b) If the Identity Difference Indicator is set to value 1, the non R^2 unit may either:

1 Follow the actions in Table 4.7-2, but where a conflict is indicated the unit shall inhibit transmission of the J7.0 (ACT =

1) message until the surveillance message is received with the Identity Difference Indicator reset to value 0, or

2 Take no action with respect to the reported ID; an operator alert may be provided as a system option.

c. Processing of ID Differences Reported in the J7.0 (ACT = 1) Message.

(1) Controlling Unit. A controlling unit receiving a J7.0 (ACT = 1) message which reports an ID of a locally-controlled track different from the local ID data shall automatically reject the received ID and originate a J7.0 (ACT = 1) message containing the local ID data and with the Controlling Unit Indicator field set to value 1. If the controlling unit also has R², the next scheduled track update by the appropriate surveillance message shall contain local data and the Identity Difference Indicator shall be set to value 0.

(2) Other Interface Units. All interface units receiving a J7.0 (ACT = 1) message from the controlling unit (Controlling Unit Indicator field set to value 1) shall automatically accept the remote data for database update. The JU with R² for the track shall report the updated track information in the appropriate surveillance message at the next transmit opportunity and shall set the Identity Difference Indicator to value 0. The ID received in the J7.0 (ACT = 1) message, with the Controlling Unit Indicator field set to value 0, shall be processed in accordance with Table 4.7-2. Actions by interface units shall be as follows:

(a) R² JU.

1 If the R² JU is directed to automatically accept the remote ID, the system shall update the local database and the new track data shall be reported in the appropriate surveillance message at the next transmit opportunity.

2 If the R² JU is directed to automatically reject the remote ID, the system shall discard the message and the track shall continue to be reported with local data.

3 If the R^2 JU identifies that an ID conflict exists, the operator shall be alerted and the local ID data shall continue to be reported in the appropriate surveillance message, with the Identity Difference Indicator set to value 1. The conflict will be resolved by manual means.

(b) Non R^2 JUs. Non R^2 JUs may either:

1 Follow the actions in Table 4.7-2, but where a conflict is indicated the unit shall inhibit transmission of the J7.0 (ACT = 1) until the surveillance message is received with the Identity Difference Indicator set to value 0, or

2 Take no action with respect to the reported ID; an operator alert may be provided as a system option.

TABLE 4.7-2. Identity Difference Resolution

LOCAL DATA	REMOTE DATA						
	PENDING	UNKNOWN	ASSUMED FRIEND	FRIEND	NEUTRAL	SUSPECT	HOSTILE
PENDING	0	2	2	2	2	2	1*
UNKNOWN	3	0	2	2	2	2	1*
ASSUMED FRIEND	3	3	0	2	2	1	1
FRIEND	3	3	3	0	1	1	1
NEUTRAL	3	1	1	1	0	1	1
SUSPECT	3	3	1	1	1	0	1*
HOSTILE	3	1	1	1	1	1	0

LEGEND

0 = NO ACTION: Take no action on the data link.

1 = OPERATOR ALERT: An Alert requiring the operator to take a MANUAL action to accept or reject the received ID.

2 = ACCEPT: Automatically accept received ID as LOCAL ID.

3 = REJECT: Automatically reject received ID.

* IN THESE THREE CASES ABOVE, SYSTEMS MAY HAVE A FEATURE TO AUTOMATICALLY ACCEPT RECEIVED ID AS LOCAL ID.

4.7.1.2.3 USE OF THE PPLI TRACK NUMBER AND IDENTITY INDICATOR IN THE
RESOLUTION OF ENVIRONMENT/CATEGORY, IDENTITY AND EXERCISE INDICATOR
DIFFERENCE RESOLUTION

Notwithstanding the requirements of paragraph 4.7.1.2.1 and 4.7.1.2.2, a C² JU may elect to accept, automatically, changes in Environment/Category, Identity or Exercise Indicator received in a track report with the PPLI Track Number and Identity Indicator set to value 1, provided the new identity is Friend and the locally held identity is not Hostile.

4.7.1.2.4 PLATFORM/PLATFORM ACTIVITY/SPECIFIC TYPE AND SPECIAL
INTEREST INDICATOR DIFFERENCE RESOLUTION

Difference resolution of the Platform/Platform Activity/Specific Type and Special Interest Indicator field values is not mandatory. A change in the ID of a given track shall include the appropriate evaluation of the Platform/Platform Activity/Specific Type and Special Interest Indicator fields, and shall be included in the J3.X or J7.0 (ACT = 1) message. When accepting a remote ID change, C² JUs shall also retain the received values of the Platform, Platform Activity, Specific Type, and Special Interest Indicator fields, where those fields are implemented, for retransmission and operator appreciation. The only exceptions to this rule during the resolution of differences are:

- a. For controlling units, see paragraphs 4.7.1.2.2b and c.
- b. When a Platform, Platform Activity or Specific Type value of 0, No Statement, is received and a non-zero value is held locally.
- c. When an Air Platform value of 6, Tanker, 7, Tanker (Boom Only), or 8, Tanker (Drogue Only) is held locally and a different value is received. An operator alert in this situation is optional.

4.7.1.3 CHANGE DATA ORDER

Differences in the Environment/Category, ID, Platform, Platform Activity, Specific Type, Exercise Indicator and Special Interest Indicator field values may also be resolved with the use of the J7.0 (ACT = 2) message. The J7.0

(ACT = 2) message is mandatory for reception and the data must be displayed to the operator. The received data, if implemented, must be accepted for retransmission except as indicated in rule e below. The use of the J7.0 (ACT = 2) message requires the following rules:

a. Transmission of the J7.0 (ACT = 2) message is initiated only by operator action. When a JU transmits this message, the JU shall reject any received data on that track that differ for a 30-second lock-out period, except for ID data from the controlling unit of the track and for processing an Exercise Status Order.

b. Except for processing an Exercise Status Order, once the J7.0 (ACT = 2) message has been received and accepted, a JU shall not transmit or accept any data on the track which differs from the data received in the J7.0 (ACT = 2) message until a 30-second lock-out has elapsed. At that time, normal track position and information conflict message transmission and reception procedures apply. There are two exceptions to the above rule as follows:

(1) After reception of the J7.0 (ACT = 2) message, JUs shall accept different data prior to the completion of the 30-second lockout period provided the different data from the same source that originated the previous J7.0 (ACT = 2) message.

(2) After reception of the J7.0 (ACT = 2) message, JUs shall accept different ID data prior to the completion of the 30-second lockout period provided the different ID data from the controlling unit.

c. JUs shall not transmit a J7.0 (ACT = 2) message containing an ID of Pending.

d. Units receiving a J7.0 (ACT = 2) Change Data Order message containing an ID of Pending shall not accept that order.

e. Receiving JUs which do not implement the changed Environment/Category and have R² on the track must cease reporting the track and transmit a J7.0 (ACT = 0) message.

f. Controlling units receiving a J7.0 (ACT = 2) message need not accept that order if the data is different from that on the locally controlled aircraft. Rejection of the J7.0 (ACT = 2) message is discussed in paragraph 4.7.1.3.1 below.

4.7.1.3.1 CONTROLLING UNIT RESPONSE TO CHANGE DATA ORDERS ON CONTROLLED TRACKS

Changes in data need not be accepted on tracks by the JU that is controlling the track. If these changes are not accepted, the controlling unit shall transmit its locally held data in a J7.0 (ACT = 1) message with the Controlling Unit Indicator field set. In addition, if the controlling unit has R², it shall continue to transmit the locally held ID data in a J3.X message.

4.7.1.4 ALERT INDICATORS

Two types of alert indicators are used on the interface:

a. Force Tell Indicator (FT IND). This indicator provides the capability to designate certain IUs, tracks, points, and EW data as being of particular interest on the interface, and the capability to override all operator controllable filters, including security filters.

b. Emergency Indicator (EMG IND). This indicator provides the same capabilities as the FT IND and also defines a condition which requires immediate attention or assistance, e.g., an aircraft with an emergency or a distressed vehicle.

The use of these alert indicators depends upon the type of message to which they apply, as shown in Table 4.7-3.

TABLE 4.7-3. Alert Indicators

MESSAGE TYPE/ IND IU/ TRACK/ POINT	MESSAGE TYPE	MESSAGE CONTAINS EMG IND	EMG IND SET TO 1 BY J7.0 (ACT = 3)	EMG IND SET TO 0 BY J7.0 (ACT = 3) ¹	MESSAGE CONTAINS FT IND	FT IND SET TO 1 BY J7.0 (ACT = 4)	FT IND SET TO 0 BY J7.0 (ACT = 4) ²
PU/RU	J2.0	X	X	X	X	X	X
JU	J2.2	X	3	3	X	X	X
	J2.3	X	3	3	X	X	X
	J2.4	X	3	3	X	X	X
	J2.5	X	3	3	X	X	X
	J2.6	X	3	3	X	X	X
REFERENCE POINT	J3.0	4	4	4	X	X	X
AIR TRACK	J3.2	X	X	X	X	X	X
SURFACE (MARITIME) TRACK	J3.3	X	X	X	X	X	X
SUBSURFACE (MARITIME) TRACK	J3.4	X	X	X	X	X	X
LAND (GROUND) POINT/TRACK	J3.5	X	X	X	X	X	X
SPACE TRACK	J3.6	4	4	4	X	X	X
EW PRODUCT INFORMATION	J3.7	X	X	X	X	X	X
ACOUSTIC BEARING/RANGE	J5.4	X	X	X	X	X	X

NOTES

1. AN EMG IND SET TO 1 IS RESET TO 0 THROUGH THE USE OF A J7.0 (ACT = 3) EMERGENCY STATUS CHANGE MESSAGE.
2. AN FT IND SET TO 1 IS RESET TO 0 THROUGH THE USE OF A J7.0 (ACT = 4) FORCE TELL STATUS CHANGE MESSAGE.
3. EMG IND SET/CLEARED BY JU ON ITSELF ONLY IN APPROPRIATE J2 MESSAGE.
4. EMERGENCY ON REFERENCE POINTS OR SPACE/BALLISTIC MISSILE TRACKS SHALL NOT BE INITIATED.

The paragraphs below explain how the EMG IND and FT IND are set and cleared for each message when the appropriate condition exists.

4.7.1.4.1 ALERT INDICATORS FOR PARTICIPATING UNITS/REPORTING UNITS

An FJU shall indicate that an emergency or force tell alert exists on a PU/RU by setting the appropriate indicator in the J2.0 Indirect Interface Unit PPLI message. All receiving JUs shall accept the alert in their databases. The FJU shall terminate an emergency or force tell alert on a PU/RU by

transmitting a J7.0 (ACT = 3 or 4) message clearing the alert indicator and forwarding subsequent J2.0 messages with the appropriate EMG IND or FT IND set to 0. All receiving JUs shall clear the alert in their databases upon receipt of the J7.0 (ACT = 3 or 4). Optionally, alerts may be cleared by reception of a J2.0 message with the EMG IND and/or FT IND set to value 0.

A JU shall initiate/terminate an alert on a PU/RU being forwarded onto Link 16 by setting/clearing the alert indicator with a J7.0 (ACT = 3 or 4) message. Upon receipt, the FJU shall accept and report the condition in the J2.0 message. Other receiving JUs shall initiate/terminate the alert in their databases upon receipt of the J7.0 (ACT = 3 or 4) message. Optionally, alerts may be cleared by reception of a J2.0 message with the EMG IND and/or FT IND set to value 0.

4.7.1.4.2 ALERT INDICATORS FOR JTIDS/MIDS UNITS

Each JU shall initiate an emergency alert on itself by setting the EMG IND in its J2 messages. All receiving C² JUs shall accept the alert in their databases.

Each JU shall terminate an emergency alert on itself by setting the EMG IND to value 0 in its subsequent J2 messages. All receiving JUs shall clear the alert in their databases, if set, upon receipt of a J2 message with the EMG IND set to value 0.

A JU shall not initiate or terminate an emergency alert on another Active JU.

A C² JU shall have the capability to initiate/terminate a force tell alert on another JU by setting/clearing the FT IND in a J7.0 (ACT = 4) message. Upon receipt, the JU whose force tell status is being changed shall accept and report the change in its J2 message. The other JUs shall set/clear the alert indicator in their databases upon receipt of the J7.0 (ACT = 4) message. Optionally, other JUs may clear the alert indicator upon reception of a J2 message with FT IND set to value 0.

4.7.1.4.3 ALERT INDICATORS FOR REFERENCE POINTS, LINES, AND AREAS

A JU with R² shall initiate a force tell alert on a reference point, line, or area by setting the FT IND in the J3.0 Reference Point message. All receiving JUs shall accept the alert.

The JU with R² shall terminate a force tell alert by transmitting a J7.0 (ACT = 4) message terminating the alert and setting the FT IND in subsequent J3.0 messages to value 0. All receiving JUs shall terminate the alert upon receipt of the J7.0 (ACT = 4) message. Optionally, alerts may be cleared by reception of a J3.0 message with FT IND set to value 0.

When another JU assumes R² for the point, line, or area, it shall transmit the appropriate FT IND value as previously received in the J3.0 message.

A JU without R² shall initiate/terminate a force tell alert by setting/clearing the FT IND in a J7.0 (ACT = 4) message. Upon receipt, the JU with R² shall set/clear the FT IND in the J3.0 message. Other receiving JUs without R² shall set/clear the FT IND upon receipt of the J7.0 (ACT = 4) message. Optionally, alerts may be cleared by reception of a J3.0 message with the FT IND set to value 0.

The JU with R² shall initiate a force tell alert on a segmented line or multisided area by transmitting the FT IND set to value 1 in all J3.0 messages used to report the line or area. The JU with R² shall terminate a force tell alert by transmitting a J7.0 (ACT = 4) message terminating the alert for each Reference TN which has been used to report the line or area and setting the FT IND to value 0 in subsequent J3.0 messages.

A JU without R² shall initiate/terminate a force tell alert on a segmented line or multisided area by setting/clearing the FT IND in a J7.0 (ACT = 4) message for each Reference TN which has been used to report the line or area. Upon receipt, the JU with R² shall set/clear the FT IND in all J3.0 messages used to report the line or area.

All receiving JUs shall set the FT IND to value 1 in their database for all TNs in a segmented line or multisided area if a J3.0 message with the FT IND field set to value 1 or a J7.0 (ACT = 4) message with the Alert Status Change

field set to value 1 is received for any TN in the line or area. All receiving JUs shall terminate the force tell alert on all TNs in a segmented line or multisided area on receipt of a J7.0 (ACT = 4) message clearing the force tell on any TN in the line or area.

A JU initiating a force tell alert on a slaved reference point or area shall also initiate an alert on the Related TN, as specified above, if Related TN does not already have the FT IND set. When the alert is terminated for the reference point or area, the JU terminating the alert shall also terminate the alert for Related TN, unless Related TN had the FT IND set prior to the slaved point or area alert being initiated. A JU terminating a force tell alert on a track shall also terminate the force tell alert on any reference point or area that is slaved to the track.

Emergency alerts are not used on reference points, lines, or areas.

4.7.1.4.4 ALERT INDICATORS FOR EMERGENCY POINTS

Alerts are not used for the J3.1 Emergency Point message since these points cannot be filtered.

4.7.1.4.5 ALERT INDICATORS FOR TRACKS

A JU with R² shall initiate an emergency or force tell alert on tracks by setting the appropriate EMG IND or FT IND in the J3.2 Air Track, J3.3 Surface (Maritime) Track, J3.4 Subsurface (Maritime) Track, or J3.5 Land (Ground) Point/Track message. All receiving JUs shall accept the alert in their databases.

The JU with R² shall terminate an emergency or force tell alert by transmitting a J7.0 (ACT = 3 or 4) message terminating the alert and setting the appropriate EMG IND field or FT IND field in subsequent J3.2, J3.3, J3.4, or J3.5 messages to 0. All receiving JUs shall terminate the alert in their databases upon receipt of the J7.0 (ACT = 3 or 4) message. Optionally, alerts may be cleared by reception of a J3.X message with the EMG IND and/or FT IND set to value 0.

When another JU assumes R^2 for a track, it shall transmit the appropriate EMG IND or FT IND which was received in previous J3.2, J3.3, J3.4, or J3.5 messages.

A JU without R^2 shall initiate/terminate an emergency or force tell alert by setting/clearing the appropriate EMG IND or FT IND in a J7.0 (ACT = 3 or 4) message. Upon receipt, the JU with R^2 shall set/clear the appropriate EMG IND or FT IND in the J3.2, J3.3, J3.4, or J3.5 message. Other receiving JUs without R^2 shall set/clear the appropriate EMG IND or FT IND in their databases upon receipt of the J7.0 (ACT = 3 or 4) message. Optionally, alerts may be cleared by reception of a J3.X message with the EMG IND or FT IND set to value 0.

4.7.1.4.6 ALERT INDICATORS FOR LAND (GROUND) POINTS OR SUBSURFACE CONTACTS

A JU with R^2 shall initiate an emergency or force tell alert on a land (ground) point or subsurface contact by setting the EMG IND or FT IND in the J3.5 (PTI = 0) Land (Ground) Point message or J5.4 Acoustic Bearing/Range message. All receiving JUs shall accept the alert.

The JU with R^2 shall terminate an emergency or force tell alert by transmitting a J7.0 (ACT = 3 or 4) message terminating the alert and setting the EMG IND or FT IND in subsequent J3.5 or J5.4 messages to value 0. All receiving JUs shall terminate the alert upon receipt of the J7.0 (ACT = 3 or 4) message. Optionally, alerts may be cleared by reception of a J3.5 or J5.4 message with the EMG IND and/or FT IND set to 0.

(Note: The remainder of this paragraph does not apply to subsurface contacts.)

When another JU assumes R^2 for the point, it shall transmit the appropriate EMG IND or FT IND value as previously received in the J3.5 message.

A JU without R^2 shall initiate/terminate an emergency or force tell alert by setting/clearing the EMG IND or FT IND in a J7.0 (ACT = 3 or 4) message. Upon receipt, the JU with R^2 shall set/clear the EMG IND or FT IND in the J3.5 message. Other receiving JUs without R^2 shall set/clear the EMG IND or FT IND

upon receipt of the J7.0 (ACT = 3 or 4) message. Optionally, alerts may be cleared by reception of a J3.5 message with the EMG IND and/or FT IND set to value 0.

4.7.1.4.7 ALERT INDICATORS FOR ELECTRONIC WARFARE PRODUCT INFORMATION

A JU with R² shall initiate an emergency or force tell alert on EW Product information by setting the appropriate EMG IND or FT IND in the J3.7 message. All receiving JUs shall accept the alert in their databases.

The JU with R² shall terminate an emergency or force tell alert by transmitting a J7.0 (ACT = 3 or 4) message terminating the alert and setting the appropriate EMG IND or FT IND in subsequent J3.7 messages to 0. All receiving JUs shall terminate the alert in their databases upon receipt of the J7.0 (ACT = 3 or 4) message. Optionally, alerts may be cleared by reception of a J3.7 message with the EMG and/or FT IND set to value 0.

A JU without R² shall initiate/terminate an emergency or force tell alert by setting/clearing the appropriate EMG IND or FT IND in a J7.0 (ACT = 3 or 4) message. Upon receipt, the JU with R² shall set/clear the appropriate EMG IND or FT IND in the J3.7 message. Other receiving JUs without R² shall set/clear the appropriate EMG IND or FT IND in their databases upon receipt of the J7.0 (ACT = 3 or 4) message. Optionally, alerts may be cleared by reception of a J3.7 message with the EMG IND and/or FT IND set to value 0.

4.7.1.5 STRENGTH CHANGE

The J7.0 (ACT = 5) Strength Change message is used to change the Strength field as reported in the J3 messages or to make a Vehicle Strength change by changing the Strength, Total Number of Vehicles and/or Strength, Percent of Tracked Vehicles field(s) in the J3.5C3 word. The J7.0 (ACT = 5) message is initiated as a result of operator action by a JU without R² to indicate a known Strength or Vehicle Strength change. All JUs that implement the J3.5C3 word shall accept Vehicle Strength changes when received or indicate to the operator that a Vehicle Strength change has been received. All JUs shall accept Strength changes when received or indicate to the operator that a Strength change has been received.

When the J7.0 (ACT = 5) message is implemented for reception, and the Strength field in the J7.0I word and the J3.5C3 word are implemented, both the Strength, Total Number of Vehicles and the Strength, Percent of Tracked Vehicles fields in the J7.0E0 must be processed.

4.7.1.6 EXERCISE STATUS ORDER

a. The J7.0 (ACT = 6) Exercise Status Order message is used to rapidly clear the Exercise Indicator and all artificial data from exercise tracks.

b. Upon receipt of a J7.0 (ACT = 6) message, all JUs shall take the following actions on all tracks in their database which have the Exercise Indicator set to value 1:

(1) Automatically set the Identity Amplifying Descriptor to Exercise Friend.

(2) Automatically set all data fields that may contain artificial information (as specified for each message in the appropriate paragraphs of this Volume) to the No Statement, default value, or actual values if held in database, and set the Exercise Indicator to value 0.

(3) Break any locally originated engagement involving the TN by transmitting a J10.2 (WES = 8) message to report the engagement broken.

(4) Terminate any locally originated Command message with Command values 2, 3, 5, or 7 involving the TN, by transmitting a J9.0 message with the Command field set to value 4, Cease Engage, or value 5, Hold Fire, if the Engagement Status field is set to value 4, Firing.

c. All data fields set No Statement or default values, as specified in paragraph 4.7.1.6b(2) above, shall remain so set until an operator action is taken to change them or a remote report with the Exercise Indicator set to value 0 is received which changes them.

d. After receipt of a J7.0 (ACT = 6) message, all subsequent messages received with the Exercise Indicator set to value 1 shall be discarded, and no messages with the Exercise Indicator set to value 1 shall be originated

until local operator action is taken to reenable the JU to accept and originate exercise tracks.

4.7.1.7 EXERCISE INDICATOR

The Exercise Indicator and the Identity Amplifying Descriptor field in the J7.0 message always refer to the Reference TN.

4.7.2 DATA UPDATE REQUEST

The J7.1 message consists of the J7.1I Data Update Request initial word and J7.1C1 Data Update Request Additional Addresses continuation word and is used to request:

- a. Data on a specific TN by setting the Action, Data Update Request field to value 1,
- b. Data by specific request indicator values by setting the Action, Data Update Request field to value 0, or
- c. Space track state vector or covariance data by setting the Action, Data Update Request field to value 2.

4.7.2.1 DATA UPDATE REQUEST BY TRACK NUMBER

The J7.1 (ACT = 1) Data Update Request by TN or (ACT = 2) Ballistic Missile Update Request message has the capability to request update information on a specific TN. When used for this purpose, the requesting JU initiates the J7.1 (ACT = 1 or 2) message with the specific TN in the Reference TN field and addressed to a specific Addressee TN(s) or to the collective address of 00177 octal. The responding JU(s), whether a specific address or collective addressee, shall then reply as described below.

4.7.2.1.1 SURVEILLANCE DATA FROM A JU WITH REPORTING RESPONSIBILITY IN RESPONSE TO A DATA UPDATE REQUEST

The JU with R² shall respond with surveillance information upon receipt of a J7.1 (ACT = 1) message on a specific TN. This JU shall transmit all data

held in the appropriate J3 message, except that covariance data will not be included on ballistic missile tracks. A JU with R^2 for a line or area shall transmit the entire line or area upon receipt of a J7.1 (ACT = 1) for any TN used to define the line or area.

4.7.2.1.2 SURVEILLANCE AMPLIFICATION DATA FROM A JU IN RESPONSE TO DATA UPDATE REQUESTS

Upon receipt of a J7.1 (ACT = 1) message on a specific TN, the JU(s) that have originated surveillance amplification data on the track shall respond with the J6.0 Amplification message containing all available data.

4.7.2.1.3 CONTROLLING UNIT RESPONSE TO DATA UPDATE REQUESTS

Upon receipt of a J7.1 (ACT = 1) message on a specific TN, the JU controlling the TN shall transmit the appropriate J10 Weapons Coordination and Management messages and J13 Platform and System Status messages to include the J10.5 Controlling Unit Report message, the J10.2 Engagement Status message, and the appropriate J13 Platform and System Status messages.

4.7.2.1.4 C² JU RESPONSE TO DATA UPDATE REQUESTS FOR OWN TN

All C² JUs receiving a J7.1 (ACT = 1) message containing their own TN shall transmit J10.2 Engagement Status messages to report the status of all engagements they are conducting and a J13 Platform and System Status message to report their own status.

4.7.2.1.5 ELECTRONIC WARFARE DATA IN RESPONSE TO DATA UPDATE REQUESTS

If the Reference TN is being reported in a J3.7 message, the reporting JU shall transmit all data held in a J3.7 message. Also, if the request is collectively addressed, any JU which has initiated an EW evaluation or association on the Reference TN in a J14.2 message shall transmit a J14.2 message with EW Action Value field set to values 7, 8, or 9 addressed to the requesting unit with the R/C field set to value 1. If the request is specifically addressed, the addressee shall transmit all locally held EW evaluations and associations in the J14.2 message with EW Action Value field

set to values 7, 8, or 9 addressed to the requesting unit with R/C field set to value 1.

4.7.2.1.6 BALLISTIC MISSILE DATA IN RESPONSE TO DATA UPDATE REQUESTS

The C² JU with R² for the Reference TN shall respond with a J3.6 Space Track message upon receipt of a J7.1 message with the Data Update Request Action field set to value 2, Ballistic Missile Update Request, on a specific TN. The JU shall transmit the data held in the appropriate J3.6 word sequence. NonR² JUs shall not respond to a J7.1 (ACT = 2) Ballistic Missile Update Request. If an R² shift occurs during execution of a DUR response, where the Number/Frequency of Updates field is set to value 2 or 3, the JU assuming R² shall not respond to any prior Data Update Request.

4.7.2.2 DATA UPDATE REQUEST BY REQUEST INDICATOR VALUES

The J7.1 (ACT = 0) Data Update Request by Request Indicator message has the capability to request information by request indicator values. The message is addressed to a specific Addressee TN(s) or to the collective address of 00177 octal. The desired request indicator values are selectable by the requesting JU setting the appropriate request indicator value. Table 4.7-4 lists the various request indicator information categories available and the response messages required by the C² JU which originated the data, or by a C² JU which has R² for a J3.0 multi-point area or multi-segmented line (defined by more than one J3.0 message) if the Reference Point Data Request Indicator is set to value 1.

4.7.2.3 RESPONSE INDICATORS

When a JU responds with a J3.0, J3.7 and/or a J6.0 Amplification message, the Response Indicator field in these messages shall be set to value 1. This field shall provide each JU with the option to process reference point and/or electronic warfare/amplification messages that are in response to a J7.1 (ACT = 0) message. This reduces the processing required by each JU to clear the displays on previously purged points.

The specific words containing the Response Indicator field are as follows:

MIL-STD-6016B

- a. J3.0I Reference Point initial word.
- b. J3.7I EW Product Information initial word.
- c. J6.0I Amplification initial word.

TABLE 4.7-4. Response Messages to Request Indicator Values

REQUEST INDICATOR INFORMATION CATEGORY	RESPONSE MESSAGE(S)
REFERENCE POINT	J3.0 (Note 1)
EA DATA	J3.7, J14.2 (Note 2)
ES DATA	J3.7, J14.2 (Note 2)
EW FIXES	J3.7, J14.2 (Note 2)
WEAPON STATUS	J10.2, J13.3, J13.5
WEATHER DATA	TBD
AMPLIFICATION	J6.0
FILTER	J7.6 (Note 3)

NOTES

- 1 RESPOND ONLY WITH J3.0 LINES AND AREAS DEFINED BY MORE THAN ONE J3.0 MESSAGE.
- 2 ONLY EXISTING EW ACTION VALUE = 7, 8, OR 9 EVALUATIONS AND ASSOCIATIONS CONCERNING THE APPLICABLE REQUESTED DATA TYPE (EA, ES, EW FIX), WHICH OWN JU HAS INITIATED IF THE REQUEST IS COLLECTIVELY ADDRESSED, OR LOCALLY HELD IF THE REQUEST IS SPECIFICALLY ADDRESSED. THESE J14.2 MESSAGES SHALL BE ADDRESSED TO THE REQUESTING UNIT, WITH R/C = 1.
- 3 TRANSMITTED TO A SPECIFIC ADDRESS ONLY.

4.7.3 RESOLUTION OF AIR AND SURFACE TRACK DUAL DESIGNATIONS

a. The recognition and resolution of dual designations require all IUs to periodically compare remote tracks to local tracks (and, optionally, to common local tracks) to determine if a dual designation has occurred. The frequency of such comparisons the criteria for determining that two tracks represent the same object, and the correlation rules shall be in accordance with section 4.4.4.3.1, Air and Surface Track Correlation. The rules for land (ground) and space track dual designation resolution are TBD.

b. When a C² JU recognizes that two tracks which are being reported to the interface are eligible for correlation, that JU shall initiate action, either automatically or manually, to resolve the dual designation. The recognizing JU shall transmit the J7.2 Correlation message requesting all other C² IUs to perform a correlation of the two tracks. The message identifies the TN to be retained and the TN to be dropped. The receiving IUs shall accept the requested correlation unless certain prespecified conditions exist which require or allow the receiving IU to reject the requested correlation or respond with a reverse correlation request. The originating JU indicates in the J7.2 message if it has any constraint which would prohibit accepting a reverse correlation. The Response Value (RV) field is provided for this purpose. When the RV field is set to value 0 it indicates a reverse correlation would be acceptable, and when the RV field is set to value 1 it indicates a reverse correlation request would be rejected. Receiving IUs desiring to reverse the requested correlation use the RV field to determine if a reverse correlation request should be originated or if the original correlation request should be rejected. Whenever a correlation request is rejected the J7.2 message with the RV field set to value 2 shall be transmitted to report the rejection. When the RV field is set to value 3, it indicates the correlation was manually initiated and shall be accepted unless certain conditions apply which require rejection (see paragraph 4.7.3.2.c). The rules for the resolution of dual designations are provided in the following paragraphs.

c. All C² JUs capable of reporting air or surface tracks shall have the capability to transmit and receive all the response values of the J7.2 message for real-time air and/or surface tracks, which are held locally by their system.

4.7.3.1 RULES FOR A C² JU ORIGINATING A J7.2 CORRELATION MESSAGE

a. Whenever a TN pair is determined, to be a dual designation, the recognizing JU shall initiate transmission of the J7.2 message with the Retained TN/Dropped TN selection in accordance with paragraph 4.4.4.3.1j. If a selection conflict occurs due to OCCs on both the Retained TN and the Dropped TN the correlation shall be abandoned until the next correlation check. The RV field shall be set to:

<u>value</u>	<u>if</u>
0	there is no OCC on the Retained TN.
1	the Retained TN has an OCC.
3	the correlation was manually initiated.

b. Transmission of a J7.2 message with the RV field set to value 0 or 1 shall be discontinued upon receipt of a J7.2 message containing one or both of the same TNs.

c. If the originating C² JU holds R² for the Dropped TN, it shall drop the Dropped TN and transmit the J7.0 (ACT = 0) message. The J7.0 (ACT = 0) message shall be transmitted after the J7.2 message.

d. C² JUs capable of transmitting the J7.2 message shall have an operator selectable capability to deactivate automatic transmission of the message.

4.7.3.2 RULES FOR C² JUs RECEIVING A CORRELATION MESSAGE

The rules to be followed by C² JUs receiving a J7.2 correlation request are as follows:

a. C² JUs receiving a J7.2 message with the RV field set to value 0 or 1 shall not accept the requested correlation when local or remote data held indicates one or more of the following conditions exist:

(1) There is a correlation restriction as listed in paragraph 4.4.4.3.1g. In this case the correlation shall be rejected.

(2) The Retained TN and the Dropped TN will decorrelate, i.e., when subjected to the decorrelation criteria once, the tracks would decorrelate. In this case the correlation shall be rejected.

(3) There is an OCC on the Dropped TN as listed in paragraph 4.4.4.3.1g(7) and the received RV field is set to value 0. The reverse correlation shall be transmitted if the new Dropped TN has no correlation constraint. If both the Retained TN and Dropped TN have an OCC, the correlation shall be rejected.

(4) There is an OCC on the Dropped TN as listed in paragraph 4.4.4.3.1g(7) and the received RV field is set to value 1. In this case, the correlation shall be rejected.

b. C² JUs receiving or generating a J7.2 message with the RV field set to value 2, Correlation Rejection, shall not automatically originate a request with the same Retained TN and Dropped TN for a period of 2(1-10,1) minutes. When a correlation request is rejected for a manual correlation, the JU originating the request shall provide an operator alert as a cue to conduct voice coordination. An operator alert in the event of the rejection of an automatic correlation shall be a system option.

c. C² JUs receiving a J7.2 message with the RV field set to value 3 shall automatically accept the requested correlation unless one of the following restrictions applies, in which case the correlation shall be rejected:

(1) The two tracks are of a different E/C, or either track has an existing E/C conflict.

(2) One track is simulated and the other is live.

(3) Both tracks are locally derived real-time tracks.

Note: After acceptance of a manual correlation the resulting track shall not be the subject of automatic decorrelation processing for a period of 5 minutes.

d. C² JUs rejecting the requested correlation shall initiate transmission of a J7.2 message with the Retained TN/Dropped TN set as received and RV field set to value 2.

e. C² JUs responding with a reverse correlation shall transmit the J7.2 message with the originally received Retained TN and Dropped TN reversed and the RV field set to value 1.

f. C² JUs not holding the Dropped TN shall not take any further action.

g. If the Retained TN is not held but the Dropped TN is held, the correlation request shall be processed as follows:

(1) If the Dropped TN has an OCC, the following action shall be taken:

(a) If RV is set to 0, transmit a reverse correlation with RV set to 1.

(b) If RV is set to 1, transmit a correlation rejection with RV set to 2.

(c) If RV is set to 3, execute the correlation using Dropped TN data and Retained TN track number.

(2) If the Dropped TN does not have an OCC, execute the correlation using Dropped TN data and Retained TN track number.

h. C² JUs rejecting a J7.2 message and holding the Dropped TN as a local or common local track shall not interpret the J7.2 message as a Drop Track message for the purpose of determining R².

i. If the received J7.2 message contains one or both of the same TNs, as contained in the transmission of the own unit J7.2 message sequence in progress, the following actions shall be taken:

(1) If the own unit RV field is set to value 0, 1, or 3, discontinue transmission of the own unit J7.2 message and process the received message in accordance with rules 4.7.3.2 a through h.

(2) If the own unit RV field is set to value 2, complete the transmission of the message sequence in progress.

4.7.4 POINTERS

A J7.3 message provides the capability for C² JUs to designate a geographic position and up to twenty characters of text on one or more C² JU's displays. In the absence of textual clarification the J7.3 message is used in conjunction with voice communications. The J7.3 message can be addressed to one, multiple, or all IUs. When it is addressed to one JU, the J7.3I Pointer initial word contains the specific address. When it is addressed to multiple JUs, the J7.3I word contains one address and the J7.3C1 Pointer Additional Addresses continuation word can contain up to four additional addresses. Multiple J7.3C1 words can be sent to accommodate more than five addresses. The J7.3C2 and J7.3C3 words are used to provide amplifying textual information of up to twenty characters. When a J7.3 message is addressed to all JUs, the J7.3I word contains the collective address. The J7.3 message can be used to specify one or more operator positions by function within a JU through the use of the pointer action data element. There is no TN assigned to the pointer; therefore, it must be displayed and dropped by local procedure.

4.7.5 TRACK IDENTIFIER MANAGEMENT

The J7.4 message is used to provide the North Atlantic Treaty Organization (NATO) Link 1 TN, the Army Tactical Data Link-1 (ATDL-1) TN, the Link 11/11B TN, or the IJMS System Reference Number (SRN) associated with a TN that is being reported on Link 16. The J7.4 message can be used to report (Report/Request TN field set to value 0) or request (Report/Request TN field set to value 1) these TNs individually, collectively, or in any combination.

A J7.4 message which reports one or more TNs, uses the Track Number Applicability indicators to indicate which TN(s) is/are being reported and which TN field(s) of the message is/are to be interpreted. A J7.4 message

which requests TNs, uses the Track Number Applicability indicator to indicate which TN(s) is/are being requested.

The J7.4 report message is transmitted initially by any JU which assigns Link 11/11B, NATO Link 1, ATDL-1 TNs, or IJMS SRNs and by those JUs which forward tracks from Link 11/11B, NATO Link 1, ATDL-1 or IJMS to Link 16. The J7.4 report message may also be transmitted by any JU in response to a J7.4 request message or as the result of operator action. The J7.4 request message may be originated by any JU as a result of operator action. After any JU responds to the request, other JUs need not respond unless additional TNs for different links have been requested and are held for the track. There is no other management of track identifier data. The latest Link 11/11B, NATO Link 1 TN, ATDL-1 TN, or IJMS SRN received on a track shall supersede previously received data.

4.7.6 IFF/SIF DATA MANAGEMENT AND SPECIAL CODE REPORTING

Management of IFF/SIF data is required to insure commonality of data between the IUs. The J7.5 message with the following action values is used to perform this function:

- a. J7.5 (ACT = 0) Clear IFF/SIF message.
- b. J7.5 (ACT = 1) IFF/SIF Difference Report message.
- c. J7.5 (ACT = 2) IFF/SIF Update Request message.
- d. J7.5 (ACT = 3) Special Code message.

The reporting of IFF/SIF data in conjunction with periodic surveillance data is the responsibility of the JU with R^2 , while all other JUs without R^2 are responsible for monitoring such data and only reporting different data with the J7.5 message. In this way the JU with R^2 can be assumed to be reporting the most current data available on the interface.

A code of all zeroes (00 or 0000) is illegal for use as an assigned operational IFF/SIF Mode I, II, or III code. Any IFF/SIF Mode I, II, or III Code field set to all zeroes indicates that the reporting unit has no data

for that mode for transmission. This condition is referred to as the No Data status.

4.7.6.1 UNIQUE MODE II CODE PROTECTION

The Mode II code requires special consideration because it is a unique identifier which can deter erroneous track correlations and alert systems/operators to erroneous entries. Therefore, the maintenance of a clear tactical picture is dependent, to a certain extent, upon the protection and utilization of the Mode II code uniqueness. The following rules apply for this purpose:

- a. Software shall inhibit any change to a valid Mode II code for the specific local track. However, the initiation or receipt of the J7.5 (ACT = 0) Clear IFF/SIF message, designating all modes or Mode II code of the specified track to be cleared, shall cause the Mode II code status to be returned to a No Data status. Automatic tracking systems may maintain the Mode II code data, for tracking purposes, until the next Mode II code interrogation. When local sensors detect a Mode II code change, it shall be treated as a new track.
- b. Operators may be alerted when two or more tracks have the same Mode II code.
- c. All unique Mode II codes should be treated as unique tracks.

4.7.6.2 CLEARING IFF/SIF DATA

When erroneous codes are detected and there are no other valid codes available or changes are inhibited, as in Mode II code reporting, a capability to delete or clear the erroneous codes is necessary so that the interface can return to a No Data status for the specified track and its corresponding mode(s). Accordingly, any JU capable of originating a J3 message that includes a continuation word containing IFF/SIF data shall also have a capability to manually originate the J7.5 (ACT = 0) message. Additionally, any JU capable of maintaining IFF/SIF data in its database shall have a capability, upon initiation or receipt of a J7.5 (ACT = 0) message, to automatically set the designated mode(s) for the specified track

to the No Data status (except for Mode IV as stated below). The following rules apply for this function:

a. Any JU may originate, by operator action only, the J7.5 (ACT = 0) message for the clearing of one or more modes on the specified track.

b. All JUs, upon receipt of the J7.5 (ACT = 0) message, shall automatically set the designated mode(s) for the specified track to the No Data status (except that acceptance or rejection of a received J7.5 (ACT=0) Mode IV Clear message may be automatic or by operator determination). The No Data status, if accepted, should be used for all subsequent interface functions and data link messages until updated by valid code responses from local or remote sources. The operator display shall indicate that a J7.5 (ACT = 0) message was received.

c. A JU with R^2 , upon receiving or initiating a J7.5 (ACT = 0) message that results in no IFF/SIF data being held on the track, shall not continue transmitting the periodic J3 message that includes the continuation word containing IFF/SIF data.

d. Any JU may change a local mode to a No Data status without transmitting a J7.5 (ACT = 0) message.

4.7.6.3 IFF/SIF DIFFERENCE RESOLUTION

Each JU without R^2 shall compare locally held data with IFF/SIF data reported by the JU with R^2 and report any valid data that are different, in accordance with the rules below. The JU without R^2 shall report current valid changes.

a. Any JU receiving a J3 message that includes a continuation word with remote IFF/SIF data or J7.5 (ACT = 1) message differing from locally held data shall respond as indicated in Table 4.7-5.

TABLE 4.7-5. IFF/SIF Difference Resolution Matrix

OWN UNIT DATA 	
---	--

LEGEND

A = ACCEPT.
 AC = ACCEPT DATA, ALERT OPERATOR.
 AC1 = IF THIS IS AN UPGRADE¹, ACCEPT THE DATA AND TRANSMIT J3.XC1 WORD. IF THIS IS A DOWNGRADE², REJECT THE DATA³
 AC2 = IF THIS IS AN UPGRADE¹, ACCEPT THE DATA. IF THIS IS A DOWNGRADE², TAKE NO ACTION³.
 AC3 = IF THIS IS AN UPGRADE¹, ACCEPT THE DATA. IF THIS IS A DOWNGRADE², REJECT THE DATA³ AND TRANSMIT LOCAL DATA IN A J7.5 (ACT = 1) MESSAGE.
 AT = ACCEPT DATA AND TRANSMIT RECEIVED DATA IN A J3.XC1 WORD AT THE NEXT TRANSMIT OPPORTUNITY.
 C = THIS IS A CONFLICT. DO NOT ACCEPT DATA AND ALERT OPERATOR.
 NA = NON APPLICABLE. NO ACTION ALLOWED EXCEPT AS STATED IN PARAGRAPH 4.7.6.3.C.
 NT = DO NOT ACCEPT DATA AND TRANSMIT LOCAL DATA IN A J3.XC1 WORD AT NEXT TRANSMIT OPPORTUNITY.
 T1 = TRANSMIT LOCAL DATA IN A J7.5 (ACT = 1) MESSAGE.
 TC = TRANSMIT LOCAL DATA IN A J7.5 (ACT = 1) MESSAGE. IF THE SAME REPORT IS TRANSMITTED TWICE WITHIN 30 SECONDS, AUTOMATIC TRANSMISSION OF THE J7.5 ACT = 1) MESSAGE IS INHIBITED AND THE OPERATOR IS ALERTED.

NOTES

- 1 UPGRADE - AN INCREASE IN THE NUMERICAL VALUE OF THE DATA ITEM CODE.
- 2 DOWNGRADE - A DECREASE IN THE NUMERICAL VALUE OF THE DATA ITEM CODE.
- 3 OPERATOR ALERT UPON A RECEIPT OF A DOWNGRADE IS SYSTEM DEPENDENT.

b. Any JU without R² entering a change of nonzero to nonzero or zero to nonzero value to its locally held Mode I, III or IV IFF/SIF data, or a change from zero to nonzero Mode II data, shall automatically report the new data in a J7.5 (ACT = 1) message.

c. Operator alerts, in addition to those specified in Table 4.7-5, may be implemented in individual JUs on an optional basis. An example would be a JU using manual IFF/SIF inputs that may desire to alert an operator whenever its data have been changed by accepting remote data.

d. When an operator receives an IFF/SIF data conflict alert as required in Table 4.7-5, he shall have the following manual actions at his disposal for attempting resolution of the difference:

- (1) Update local data manually or verify automatic inputs.
- (2) Initiate J7.5 (ACT = 0) Clear IFF/SIF message (any mode).
- (3) Initiate J7.5 (ACT = 1) IFF/SIF Difference Report message (any mode).
- (4) Change local data to agree with remote data except in the case of Mode II code.
- (5) Decorrelate the local data from the remote data, causing the assignment of a new track number to local data.
- (6) Clear operator alert (any mode).

4.7.6.3.1 CURRENT/NONCURRENT DATA

Current IFF/SIF data, as defined for use in Table 4.7-5, are those valid code responses that are no more than 40 seconds old since entry into the database by automatic or manual inputs. However, systems need not time-tag IFF/SIF data for purposes of determining currency. When remote IFF/SIF data is accepted in accordance with the difference resolution matrix, Table 4.7-5, such remote data will be entered as valid noncurrent data. Systems not maintaining currency indicators will assume local track/mode is current if

the track/mode is currently being received automatically from own sensors. All other code data shall be assumed to be noncurrent. Processing of Mode IV codes is exempt from all current/noncurrent indications.

4.7.6.4 IFF/SIF UPDATE REQUESTS

Data updating can occur spontaneously as a result of the R^2 unit reporting a No Data status (value 0) for one or more modes in a required IFF/SIF Surveillance data report, J3.XC1. Receiving units which hold valid nonzero data will respond as required by the IFF/SIF Difference Resolution Matrix, Table 4.7-5. Data updating can also occur as a result of an operator action wherein the update request is transmitted in a J7.5 (ACT = 2) IFF/SIF Update Request message. Units receiving the J7.5 (ACT = 2) message will respond by transmitting their local data codes. Rules for the IFF/SIF update function are as follows:

a. The J7.5 (ACT = 2) message shall be manually initiated by R^2 and non R^2 units with the applicable mode indicators set when requesting update of IFF/SIF data.

b. R^2 units receiving the J7.5 (ACT = 2) message will respond by initiating a J3.XC1 message regardless of the No Data status.

c. Non R^2 units receiving the J7.5 (ACT = 2) message from the R^2 unit will respond by initiating a J7.5 (ACT = 1) message if valid local data (nonzero codes) are held for the requested mode(s). If the requested data has been transmitted by another JU, the remaining JUs need not respond with their local data.

d. Non R^2 units receiving the J7.5 (ACT = 2) message from other non R^2 units will not respond to the request.

4.7.6.5 SPECIAL CODE REPORTING

The J7.5 (ACT = 3) message is used to exchange codes that have special meaning for implementing JUs. The following rules are applicable:

a. JUs implementing the special codes capability shall provide nonambiguous displays for both IFF/SIF code responses and the special code responses. Also, JUs implementing more than one of the special code fields shall provide nonambiguous displays which clearly distinguish each type of special code from all other types of special codes.

b. The rules for reporting and managing the J7.5 (ACT = 3) message shall be as stated in this paragraph and are not governed by the rules for IFF/SIF data.

c. Any JU may report special codes using the J7.5 (ACT = 3) message to initiate, change, or clear such codes.

d. Any JU clearing one or more of the special codes shall transmit the J7.5 (ACT = 3) message with the special code applicability indicator fields set and the associated special code fields set to value 0.

e. JUs implementing the special code capability shall accept all zero or nonzero special code values as received.

f. A JU shall transmit special code information only if data are held.

g. The JU originating or changing a special code shall assume J7.5 (ACT = 3) reporting responsibility for retransmission until such time as a special code message is received for that track from another unit, or the track is dropped, or a clear special code is received.

h. The JU having or assuming reporting responsibility for the track surveillance report shall also have reporting responsibility for nonzero special codes if that system implements the J7.5 (ACT = 3) message.

i. When a JU transmits a J7.5 (ACT = 3) Special Code message all nonzero special codes for that track will be reported.

4.7.7 FILTERS

Two types of filters are used by a JU, message label/sublabel filters and data filters, as described below.

a. Message label/sublabel filters may be used to inhibit overloading of the terminal-to-host interface, or to reduce demands for TDS processor time, on a JU. The message label/sublabel filter shall be considered a separate category of filter from data filters, and its use shall not be restricted by the data filter rules described in paragraph 4.7.7.8. However, use of these filters is restricted to receive only filtering for those messages which the JU does not implement due to the mission or particular capabilities/restrictions of that platform. The message label/ sublabel filter will select messages to be filtered by the Link 16 label and sublabel fields, and therefore will not be forwarded to the Host TDS. The J7.6 message shall not be used to request implementation/deletion or status of message label/sublabel filters, and this type of filter will not be reported in the J7.6 Filter Description Report. If implemented, the message label/ sublabel filter shall only be used for the purposes described above, i.e. it shall not be used as a data filter. All subsequent subparagraphs of 4.7.7 refer to data filters and not to the message label/sublabel filter. (A message label/sublabel filter shall not be used to avoid the data forwarding requirements as set forth in Appendix C, Data Forwarding.)

b. Data filters may be used to inhibit the flow of data on a data link. A data filter that inhibits data from being transmitted on a data link is a transmit filter. A data filter that deletes data received on a data link prior to entry into an IU database is a receive filter. Interfacing systems have certain defined filter capabilities in order to prevent data link overload conditions, overload of a system database, and/or undesired data from entering a system database. Data filter implementation is optional and system constraints may dictate the type of filters used.

4.7.7.1 DATA FILTER TYPES

There are five broad filter types as follows:

a. Environment/Category.

(1) Unknown.

(2) Space.

- (3) Air.
- (4) Surface (Maritime).
- (5) Subsurface (Maritime).
- (6) Land (Ground).
- (7) Reference Point.
- (8) Electronic Warfare.

b. Identity.

- (1) Pending.
- (2) Unknown.
- (3) Assumed Friend.
- (4) Friend.
- (5) Neutral.
- (6) Suspect.
- (7) Hostile.

c. Special Processing.

d. Simulation.

e. Geographic Area.

- (1) Circle/Ellipse.
- (2) Annulus.

- (3) Circular Sector.
- (4) Sector of Annulus.
- (5) Rectangle/Square.
- (6) Nested Rectangle.
- (7) Line.
- (8) Other multisided figures.

4.7.7.2 ENVIRONMENT/CATEGORY FILTERS

An environment/category filter allows a JU to filter tracks and nonC² IUs from the space, air, surface (maritime), subsurface (maritime), and land (ground) environment/categories, as well as reference points and electronic warfare product information.

4.7.7.3 IDENTITY FILTERS

An ID filter allows a JU to filter tracks and nonC² IUs based on their IDs. Exercise Indicator settings have no influence on ID filters. Identity and Identity Amplifying Descriptor are filtered in the same manner e.g., a Friend filter would filter both Friend and Exercise Friend, a Hostile filter would filter both Hostile and Faker, etc.

4.7.7.4 GEOGRAPHIC FILTERS

A geographic filter allows a JU to filter tracks and nonC² IUs based on their geographic location. Maximum and minimum altitude values may also be defined for each filter that make it possible to describe volumes. Filters can be fixed geographically, slaved to the filtering JU or some other moving reference point, or move independently. (See Table 4.7-6.)

a. A circle filter is defined by a center point, a major and minor axis that are equal, and an axis orientation. When a second set of major and

minor axes that are equal and a second axis orientation are used, an annulus filter is defined, e.g., a ring-shaped area.

b. A circular sector filter is defined by a center point, a major and minor axis that are equal, an axis orientation, a beginning bearing, and an ending bearing. When a second set of major and minor axes that are equal and a second axis orientation are used with the same beginning and ending bearing, a sector of an annulus filter is defined.

c. A line filter is defined by two or more points with an indication of the direction of filtering from the line. The direction is indicated as the true compass quadrant in which a normal to the line in the direction to be filtered lies. The entire area extending outward and from both ends of the line infinitely will be filtered. For a segmented line, the direction is indicated as it applies to the first segment, i.e., the segment described by the Latitude; Longitude; and Delta Latitude, 1; Delta Longitude, 1 fields of the J7.6 message that has the Line/Area Continuation Indicator, 1 set to value 0. Figure 4.7-1 illustrates the method of specifying line filters. The shaded area will be filtered. Note that a multisided figure that is not a square, rectangle, circle, or ellipse is just a special case of a multisegmented line with the first and last points being coincident.

d. A rectangular filter is defined by a center point, a major and minor axes, and an axis orientation. When a second set of major and minor axes and a second axis orientation are used, a nested rectangular filter is defined.

e. The area filters also require an indication of whether the filtering is being done inside or outside the defined area.

Table 4.7-6. Geographic Filter Description (Sheet 1 of 2)






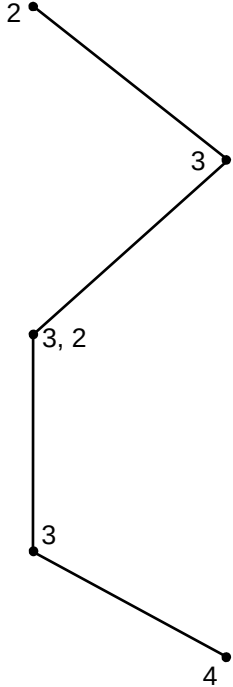

NAME	DIAGRAM	DESCRIPTION	CONTAINED IN WORD	WORD SEQUENCE
CIRCLE		1. LATITUDE/LONGITUDE – ORIGIN OF THE CIRCLE 2. AREA MAJOR AXIS, 1/AREA MINOR AXIS, 1/AXIS ORIENTATION, 1/SQUARE/CIRCLE SWITCH, 1.	J7.6E0 J7.6C1	J7.6I/ J7.6E0/ J7.6C1
ANNULUS		1. LATITUDE/LONGITUDE – ORIGIN OF THE ANNULUS. 2. AREA MAJOR AXIS, 1/AREA MINOR AXIS, 1/AXIS ORIENTATION, 1/SQUARE/CIRCLE SWITCH, 1. 3. AREA MAJOR AXIS, 2/AREA MINOR AXIS, 2/AXIS ORIENTATION, 2/SQUARE/CIRCLE SWITCH, 2.	J7.6E0 J7.6C1 J7.6C1	J7.6I/ J7.6E0/ J7.6C1
CIRCULAR SECTOR		1. LATITUDE/LONGITUDE – ORIGIN OF THE CIRCLE. 2. AREA MAJOR AXIS, 1/AREA MINOR AXIS, 1/AXIS ORIENTATION, 1/SQUARE/CIRCLE SWITCH, 1. 3. BEARING 1 – START BEARING 4. BEARING 2 – END BEARING (CLOCKWISE ROTATION).	J7.6E0 J7.6C1 J7.6C1 J7.6C1	J7.6I/ J7.6E0/ J7.6C1
SECTOR OF ANNULUS		1. LATITUDE/LONGITUDE – ORIGIN OF THE CIRCLE. 2. AREA MAJOR AXIS, 1/AREA MINOR AXIS, 1/AXIS ORIENTATION, 1/SQUARE/CIRCLE SWITCH, 1. 3. AREA MAJOR AXIS, 2/AREA MINOR AXIS, 2/AXIS ORIENTATION, 2/SQUARE/CIRCLE SWITCH, 2. 4. BEARING 1 – START BEARING 5. BEARING 2 – END BEARING (CLOCKWISE ROTATION).	J7.6E0 J7.6C1 J7.6C1 J7.6C1 J7.6C1	J7.6I/ J7.6E0/ J7.6C1
RECTANGLE		1. LATITUDE/LONGITUDE – ORIGIN OF THE RECTANGLE. 2. AREA MAJOR AXIS, 1/AREA MINOR AXIS, 1/AXIS ORIENTATION, 1/SQUARE/CIRCLE SWITCH, 1.	J7.6E0 J7.6C1	J7.6I/ J7.6E0/ J7.6C1

Table 4.7-6. Geographic Filter Description (Sheet 2 of 2)

NAME	DIAGRAM	DESCRIPTION	CONTAINED IN WORD	WORD SEQUENCE
LINE		1. LINE/AREA CONTINUATION – SET TO THE NO STATEMENT VALUE FOR THE FIRST WORD SEQUENCE DEFINING THE SEGMENTED LINE; SET TO THE LINE/AREA CONTINUATION VALUE FOR ALL WORD SEQUENCES FOLLOWING THE FIRST WORD SEQUENCE. 2. LATITUDE/LONGITUDE – DESCRIBE THE INITIAL POINT IN A SEGMENTED LINE. THE LATITUDE/LONGITUDE FIELDS ARE CONTAINED IN THE FIRST WORD SEQUENCE. IN ALL WORD SEQUENCES FOLLOWING THE FIRST, THE POSITION DESCRIBED BY THESE FIELDS IS COINCIDENT WITH THE LAST POINT DESCRIBED IN THE PREVIOUS WORD SEQUENCE. 3. DELTA LATITUDE/DELTA LONGITUDE – DESCRIBE THE ADDITIONAL POINTS THAT SHOULD BE JOINED TO FORM A SEGMENTED LINE. 4. END POINT – WHEN SET, IDENTIFIES THE ASSOCIATED POINT AS BEING THE END POINT OF A SEGMENTED LINE. THIS POINT SHOULD BE COINCIDENT WITH POINT 3 IF DESCRIBING A MULTISIDED FIGURE.	J7.6I J7.6E0 J7.6C2 J7.6C2	MULTIPLE J7.6I/ J7.6E0/ J7.6C2 SEQUENCES
NESTED RECTANGLE		1. LATITUDE/LONGITUDE – ORIGIN OF BOTH RECTANGLES. 2. AREA MAJOR AXIS, 1/AREA MINOR AXIS, 1/AXIS ORIENTATION, 1/SQUARE/CIRCLE SWITCH, 1. 3. AREA MAJOR AXIS, 2/AREA MINOR AXIS, 2/AXIS ORIENTATION, 2/SQUARE/CIRCLE SWITCH, 2.	J7.6E0 J7.6C1 J7.6C1	J7.6I/ J7.6E0/ J7.6C1

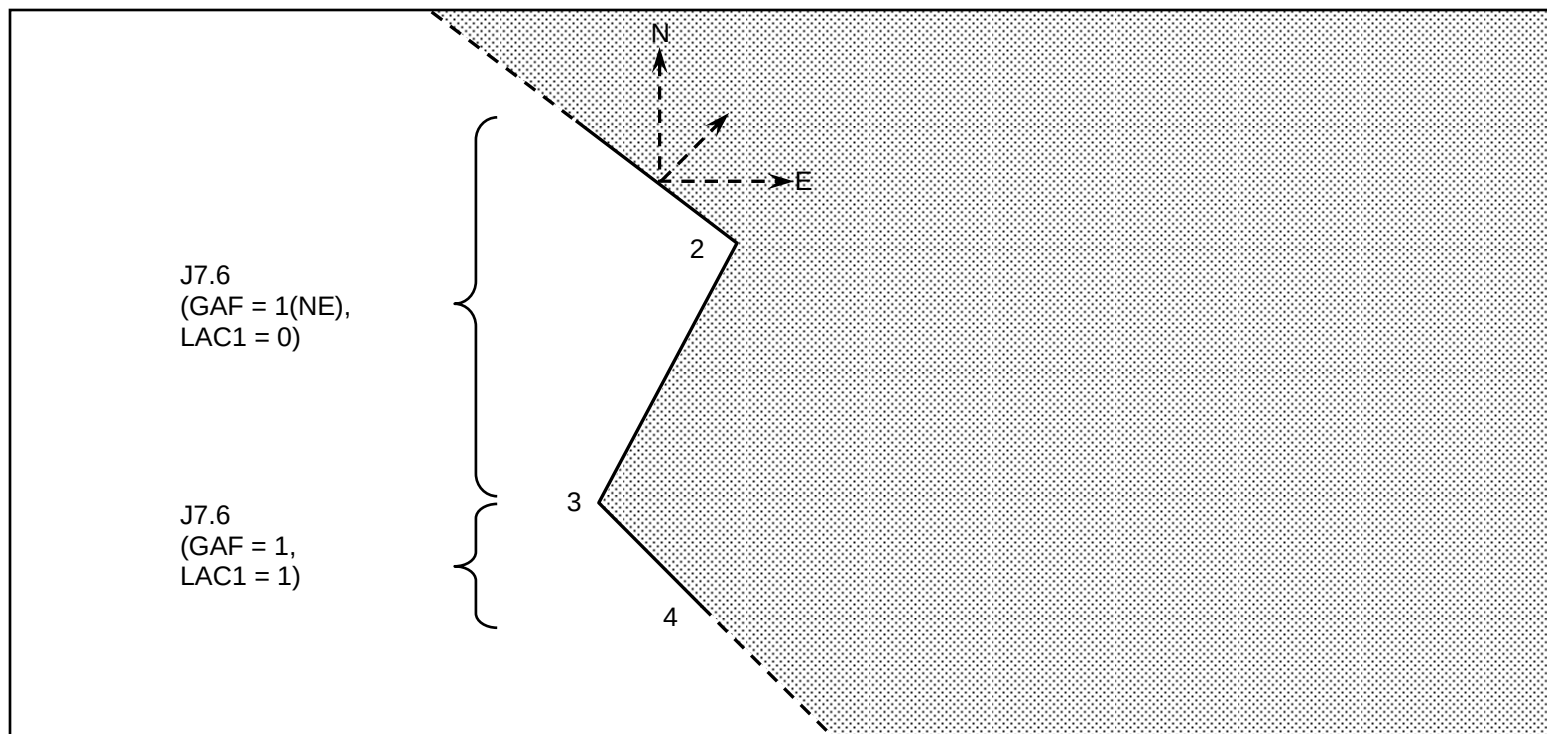


FIGURE 4.7-1. Multisegmented Line Filter

4.7.7.5 SPECIAL PROCESSING FILTERS

A special processing filter allows a JU to filter data based on the setting of the Special Processing Indicator field.

4.7.7.6 SIMULATION FILTERS

A simulation filter allows a JU to filter data and IUs based on the setting of the Simulation Indicator field.

4.7.7.7 DATA FILTER RULES

The data filtering rules at sub-paragraphs a. through i. below apply to C² JUs and those at sub-paragraphs a. through j. apply to nonC² JUs operating on Needline PGs:

a. The use of interface filters shall be coordinated with all IUs to minimize track management problems. Coordination of filtering requests may be done by voice or other communications media.

b. Any system which filters tracks/IUs on receipt must establish a transmit filter which duplicates the receive filter. In addition, when a receive filter is geographically defined, the transmit filter must, where possible, be defined to permit the area filtered for transmission to be slightly larger than the area filtered for reception so that tracks entering or leaving the filtered area may be displayed to the operator to prevent dual designations.

c. If the storage files of a JU are filled and all applicable filters have been used, acceptance of the new data shall not be required, regardless of its ID or priority. This procedure applies to both real-time and nonreal-time data.

d. Any track or nonC² IU with an EMG IND or FT IND set to the value of 1 shall not be filtered. A J3.1 message shall not be filtered.

e. Active nonsimulated C² IUs cannot be filtered. In other words, C² IUs with the Simulation Indicator field set in their J2 PPLI message may be filtered.

f. All filters are identified by filter number for coordination with other JUs.

g. Tracks are eligible for transmission on the interface only if they are not inhibited from transmission by any of the transmission filters currently set.

h. Filters shall apply to tracks initiated prior to filter activation as well as to tracks initiated while the filter is active. When a transmit filter is activated by a unit, the unit shall cease reporting any track for which it has R² and which meets the filter criteria, and shall comply with the rules for terminating transmission of the applicable track data of the applicable Environment/Category.

i. The J7.2 Correlation message shall not be inhibited by any filter.

j. Targets reported in J12.7 messages shall be processed as EW Product information for the purposes of environment/category filtering.

4.7.7.8 FILTER MESSAGE

Management and reporting of Link 16 transmit filters are accomplished using the following messages:

a. J7.6 (ACT = 0) Filter Implementation Request message.

b. J7.6 (ACT = 1) Filter Description Report message.

c. J7.6 (ACT = 2) Delete Filter Request/Report message.

d. J7.1 (ACT = 0) Data Update Request by Request Indicator message.

The J7.6 message only applies to transmit filters as defined in paragraph 4.7.7, i.e., it is only used to request or report the insertion or deletion

of transmit filters including data forwarding filters. The Filter Unit Type field indicates whether the filter applies to individual JU transmissions or forwarding unit transmissions of forwarded data. The use of receive filters is neither requested nor reported via Link 16. Forwarding unit filters requested or reported are only those used for filtering transmissions originating on Link 16. Filters for forwarding data from any other link to Link 16 are neither requested nor reported via Link 16.

Voice coordination is required in addition to the filter message to ensure filter management on the interface.

4.7.7.8.1 FILTER IMPLEMENTATION REQUEST

The J7.6 (ACT = 0) message is used by a JU to request that a filter be implemented by another JU. The implementation request consists of specifying the filter types and the parameters for each type and whether to filter inside or outside the defined area, with Filter Number field set to value 0. If specific filters have been prearranged, then an implementation request may consist of specifying the filter number with all Filter Indicator fields of the J7.6 (ACT = 0) set to value 0.

4.7.7.8.2 FILTER DESCRIPTION REPORT

The J7.6 (ACT = 1) message is used by a JU to report a filter which the JU has inserted into its TDS or to respond to a J7.1 (ACT = 0) message. The filter number shall be set to a value between 1 and 14. When used in response to a J7.1 (ACT = 0) message, the filter message(s) shall be addressed to the JU requesting the filter information.

A new filter report on a previously received filter number from a JU shall supersede prior filter data for that number. In the case of a line or area filter requiring multiple messages all with the same filter number to describe the line or area, all of the messages must be treated as a single filter report.

4.7.7.8.3 INTERPRETATION OF FILTER REQUEST/REPORTS

The following rules specify the interpretation and interrelationships of the various Filter Indicators in the J7.6I word. The phrase "are filtered" used below means "shall be filtered" in J7.6 (ACT = 0) Request, or "is being filtered" in a J7.6 (ACT = 1) Report. All of the below listed rules are subject to the restrictions in paragraphs 4.7.7.8d and e.

a. Transmit filters requested or reported in the J7.6 message apply to four classes of data as follows:

(1) Tracks - Tracks reported in J3.2 through J3.5 messages and nonC² IUs reported in J2.0 and J2.2 through J2.6 messages if Friends are filtered. The term "tracks" used herein includes nonC² IUs unless otherwise indicated.

(2) Reference Points - Reference points, lines, and areas reported in J3.0 messages.

(3) Electronic Warfare Product Information - Reported in J3.7 messages.

(4) Targets - Targets reported in J12.6 and J12.7 messages on Needline PG.

b. Filters requested or reported in the J7.6 messages do not apply to any messages other than the J2, J3, and J12 (on Needline PG) series messages listed above, e.g., J2 series PPLI data for C² IUs, J6.0 Amplification data, J14.0 EW Parametric data, etc., except a simulation filter applies to C² IUs.

c. Track filters shall be requested/reported in separate J7.6 messages from reference point and EW product filters, with the following exception: if in a track filter message the Unknown E/C Filter Indicator is set to value 1, then EW product data with Unknown E/C shall be filtered in addition to any other valid filter combination contained within that message. Valid combinations of filter indicators for tracks, together with their meanings, are given in Table 4.7-7.

d. Since reference points have no E/C or ID, point filters shall be requested/reported in separate J7.6 messages from tracks and EW product information, i.e., if the Reference Point Filter Indicator is set, the only other Filter Indicators that may be set are the SPI and Simulation Filter Indicators and, if required, a Geographic Area Filter. Valid combinations of filter indicators for reference points, together with their meanings, are given in Table 4.7-8.

e. EW product information filters shall be requested/reported in separate J7.6 messages from tracks and points except that if the Unknown E/C filter is set, then Unknown EW product information are filtered regardless of the setting of the EW Filter Indicator. When the EW Filter Indicator is set, then all other Filter Indicators set in the same message apply only to EW product information data. Valid combinations of filter indicators for EW products, together with their meanings, are given in Table 4.7-9.

f. If a Geographic Area Filter is set and the EW Filter Indicator is set, then all EW Fixes within/out the area and all EW AOPs having their center within/out the area and all EW LOBs with origin within/out the area are filtered.

g. If a Geographic Area Filter is set and the Reference Point Filter Indicator is set, then all points within/out the area, all lines with all points within/out the area, and all areas completely within/out the area are filtered.

4.7.7.8.4 MOVING FILTERS

Moving filters are specified using the J7.6I Slaved Indicator and the J7.6C3 continuation word. The Slaved Indicator must be set to value 1 if the J7.6C3 word is included. If the filter is slaved to an existing TN, the TN shall be reported as TN, Related with Course and Speed set to No Statement. If Latitude and Longitude in the J7.6E0 are set to No Statement, then the position of TN, Related shall be used instead of the J7.6E0 Latitude and Longitude. If the filter is to move independently of any other TN, then TN, Related shall be set to No Statement with Course and Speed specified. Movement of the filter shall begin at the time of transmission of the J7.6 (ACT = 1) filter description report. If fixed geographic points are used in

the initial filter description, they shall be updated in any subsequent reports of the same filter based on the movement of TN, Related or the filter's course and speed.

4.7.7.8.5 DELETE FILTER REQUEST/REPORT

The J7.6 (ACT = 2) message is used by a JU to request that a filter or all filters be deleted by an addressed JU. A JU may also report the deletion of one or all of its filters with this message. A TN address of 00177 octal shall be used when a JU deletes a filter. A filter number of 15 shall be used to indicate all of a JU's filters.

4.7.7.8.6 DATA UPDATE REQUEST

The J7.1 (ACT = 0) message shall be used by a JU requesting information on a filter. When used, the J7.1 (ACT = 0) message shall be addressed to a specific JU; i.e., the collective address of 00177 octal shall not be used. The JU receiving the request shall transmit either all locally inserted filters in response to Filter Number equal to 15 or parameters on a specific filter as specified by the Filter Number field in the J7.1 (ACT = 0) message. The J7.1 (ACT = 0) Filter Number field shall not be set to value 0 when the Filter Data Request Indicator is set to value 1.

4.7.7.8.7 TERMINATION OF FILTERS

When a JU deletes a filter which it had reported, it should transmit a J7.6 (ACT = 2) message. Remote filters shall be dropped when a J7.6 (ACT = 2) message is received.

4.7.7.8.8 PURGING OF FILTER REQUESTS

Filter messages are nonredundant messages, and each JU should have the capability to drop remote filter reports from its own system.

4.7.8 DATA ASSOCIATION

The J7.7 message provides the capability to indicate that two TNs or the information defining two TNs is associated with the same contact. For

example, the association of an air track with an ES report could indicate that the designated air track is the source of the ES data. The association of a ballistic missile track with a missile launcher is another example of data association. The J7.7 message shall not be used to correlate two TNs or to pair a TN to any other TN. The J7.7 message is totally independent of the J6.0, J10.6, J7.2, and J10.2 messages and may be transmitted concurrently with those messages.

4.7.8.1 TERMINATING ASSOCIATION

An association shall be terminated by the JU which had originated the association when it is determined that the association no longer exists.

4.7.8.2 PURGING ASSOCIATION DATA

The J7.7 message is transmitted periodically and JUs should purge received data if data have not been updated after a specified time. This time interval is optional.

4.7.9 UNIT DESIGNATOR MANAGEMENT

The J8.0 message provides the capability to relate a unit designator with an IU TN. In an NCS community where changes in Needline PGs can occur after initialization, an NCS must manage, drop, or add unit designators to be associated with JU or RU TNs.

4.7.10 MISSION CORRELATOR MANAGEMENT

The J8.1 message provides the controlling unit the capability to add, delete, or change the mission correlator (MC) of TNs under its control. (See paragraph 4.10.1.1, Mission Correlator, for information concerning the tactical application of mission correlator.)

4.7.10.1 MISSION CORRELATOR CHANGE FIELD

The Mission Correlator Change field allows for:

- a. The assignment of one MC.

- b. The deletion of the assigned MC.
- c. The change of the assigned MC to another MC.

4.7.10.2 USE OF THE J8.1 MISSION CORRELATOR FIELDS

When initially assigning or deleting a mission correlator, the Mission Correlator field in the J8.1 message contains the MC number to be assigned or deleted, and the Mission Correlator, New field is set to No Statement. When changing a previously assigned mission correlator, the Mission Correlator field contains the previously assigned MC number, and the Mission Correlator, New field contains the new MC number.

Table 4.7-7. Transmission Filter Interpretation For Tracks
(Sheet 1 of 3)

ENV ¹	ID	GEO	SP	SIM	INHIBIT FROM TRANSMISSION
0 ²	0	0	0	0	No tracks being filtered.
1	0	0	0	0	Any track of defined Environment categories.
0	1	0	0	0	Any track of defined Identity categories.
1	1	0	0	0	Any track of defined Environment <u>and</u> Identity categories.
0	0	1	0	0	Any track within/out defined geographic area.
1	0	1	0	0	Any track of defined Environment categories within/out defined geographic area.
0	1	1	0	0	Any track of defined Identity categories within/out defined geographic area.
1	1	1	0	0	Any track of defined Environment <u>and</u> Identity categories within/out defined geographic area.
0	0	0	1	0	Any track with Special Processing status.
1	0	0	1	0	Any track of defined Environment categories with Special Processing status.
0	1	0	1	0	Any track of defined Identity categories with Special Processing status.
1	1	0	1	0	Any track of defined Environment <u>and</u> Identity categories with Special Processing status.
0	0	1	1	0	Any track within/out defined geographic area with Special Processing status.
1	0	1	1	0	Any track of defined Environment categories within/out defined geographic area with Special Processing status.
0	1	1	1	0	Any track of defined Identity categories within/out defined geographic area with Special Processing status.
1	1	1	1	0	Any track of defined Environment <u>and</u> Identity categories within/out defined geographic area with Special Processing status.

Table 4.7-7. Transmission Filter Interpretation For Tracks
(Sheet 2 of 3)

ENV ¹	ID	GEO	SP	SIM	INHIBIT FROM TRANSMISSION
0	0	0	0	1	Any track with Simulation status.
1	0	0	0	1	Any track of defined Environment categories with Simulation status.
0	1	0	0	1	Any track of defined Identity categories with Simulation status.
1	1	0	0	1	Any track of defined Environment <u>and</u> Identity categories with Simulation status.
0	0	1	0	1	Any track within/out defined geographic area with Simulation status.
1	0	1	0	1	Any track of defined Environment categories within/out the defined geographic area with Simulation status.
0	1	1	0	1	Any track of defined Identity categories within/out the defined geographic area with Simulation status.
1	1	1	0	1	Any track of defined Environment <u>and</u> Identity categories within/out the defined geographic area with Simulation status.
0	0	0	1	1	Any track with Simulation status <u>or</u> Special Processing status.
1	0	0	1	1	Any track of defined Environment categories with Simulation status <u>or</u> Special Processing status.
0	1	0	1	1	Any track of defined Identity categories with Simulation status <u>or</u> Special Processing status.
1	1	0	1	1	Any track of defined Environment <u>and</u> Identity categories with Simulation status <u>or</u> Special Processing status.
0	0	1	1	1	Any track within/out the defined geographic area with Simulation status <u>or</u> Special Processing status.

Table 4.7-7. Transmission Filter Interpretation For Tracks
(Sheet 3 of 3)

ENV ¹	ID	GEO	SP	SIM	INHIBIT FROM TRANSMISSION
1	0	1	1	1	Any track of defined Environment categories within/out the defined geographic area with Simulation status <u>or</u> Special Processing status.
0	1	1	1	1	Any track of defined Identity categories within/out the defined geographic area with Simulation status <u>or</u> Special Processing status.
1	1	1	1	1	Any track of defined Environment <u>and</u> Identity categories within/out the defined geographic area with Simulation status <u>or</u> Special Processing status.

Notes

1. Environment/Category of "Unknown" applies only to EW Product data, see paragraph 4.7.7.8.3c.

2. In this table "0" indicates that no filter indicator(s) are set from the corresponding filter type, and "1" indicates that one or more filter indicators are set from the filter type.

Legend

ENV	-	Environment/Category Filter
ID	-	Identity Filter
GEO	-	Geographic Area Filter
SP	-	Special Processing Filter
SIM	-	Simulation Filter

Table 4.7-8. Transmission Filter Interpretation For Reference Points

GEO	SP	SIM	INHIBIT FROM TRANSMISSION
0	0	0	Any Reference Point or when requesting establishment/modification of a prearranged filter.
1	0	0	Any Reference Point within/out defined geographic area.
0	1	0	Any Reference Point with Special Processing status.
1	1	0	Any Reference Point within/out the defined geographical area with Special Processing status.
0	0	1	Any Reference Point with Simulation status.
1	0	1	Any Reference Point within/out the defined geographic area with Simulation status.
0	1	1	Any Reference Point with Simulation status <u>or</u> Special Processing status.
1	1	1	Any Reference Point within/out the defined geographic area with Simulation status <u>or</u> Special Processing status.

Note

In this table "0" indicates that no filter indicator(s) are set from the corresponding filter indicator category, and "1" indicates that one or more filter indicators are set from the filter indicator category.

Legend

GEO	-	Geographic Area Filter
SP	-	Special Processing Filter
SIM	-	Simulation Filter

Table 4.7-9. Transmission Filter Interpretation For
EW Products (Sheet 1 of 2)

ENV	ID	GEO	SP	SIM	INHIBIT FROM TRANSMISSION
0	0	0	0	0	Any EW Product or when requesting establishment/modification of a prearranged filter.
1	0	0	0	0	Any EW Product of defined Environment categories.
0	1	0	0	0	Any EW Product of defined Identity categories.
1	1	0	0	0	Any EW Product of defined Environment <u>and</u> Identity categories.
0	0	1	0	0	Any EW Product within/out defined geographic area.
1	0	1	0	0	Any EW Product of defined Environment categories within/out defined geographic area.
0	1	1	0	0	Any EW Product of defined Identity categories within/out defined geographic area.
1	1	1	0	0	Any EW Product of defined Environment <u>and</u> Identity categories within/out defined geographic area.
0	0	0	1	0	Any EW Product with Special Processing status.
1	0	0	1	0	Any EW Product of defined Environment categories with Special Processing status.
0	1	0	1	0	Any EW Product of defined Identity categories with Special Processing status.
1	1	0	1	0	Any EW Product of defined Environment <u>and</u> Identity categories with Special Processing status.
0	0	1	1	0	Any EW Product within/out defined geographic area with Special Processing status.
1	0	1	1	0	Any EW Product of defined Environment categories within/out defined geographic area with Special Processing status.
0	1	1	1	0	Any EW Product of defined Identity categories within/out defined geographic area with Special Processing status.
1	1	1	1	0	Any EW Product of defined Environment <u>and</u> Identity categories within/out defined geographic area with Special Processing status.

Table 4.7-9. Transmission Filter Interpretation For
EW Products (Sheet 2 of 2)

ENV	ID	GEO	SP	SIM	INHIBIT FROM TRANSMISSION
0	0	0	0	1	Any EW Product with Simulation status.
1	0	0	0	1	Any EW Product of defined Environment categories with Simulation status.
0	1	0	0	1	Any EW Product of defined Identity categories with Simulation status.
1	1	0	0	1	Any EW Product of defined Environment <u>and</u> Identity categories with Simulation status.
0	0	1	0	1	Any EW Product within/out defined geographic area with Simulation status.
1	0	1	0	1	Any EW Product of defined Environment categories within/out the defined geographic area with Simulation status.
0	1	1	0	1	Any EW Product of defined Identity categories within/out the defined geographic area with Simulation status.
1	1	1	0	1	Any EW Product of defined Environment and Identity categories within/out the defined geographic area with Simulation status.
0	0	0	1	1	Any EW Product with Simulation status <u>or</u> Special Processing status.
1	0	0	1	1	Any EW Product of defined Environment categories with Simulation status or Special Processing status.
0	1	0	1	1	Any EW Product of defined Identity categories with Simulation status or Special Processing status.
1	1	0	1	1	Any EW Product of defined Environment and Identity categories with Simulation status <u>or</u> Special Processing status.
0	0	1	1	1	Any EW Product within/out the defined geographic area with Simulation status <u>or</u> Special Processing status.
1	0	1	1	1	Any EW Product of defined Environment categories within/out the defined geographic area with Simulation or Special Processing status.
0	1	1	1	1	Any EW Product of defined Identity categories within/out the defined geographic area with Simulation status or Special Processing status.
1	1	1	1	1	Any EW Product of defined Environment and Identity categories within/out the defined geographic area with Simulation status or Special Processing status.

Note

In this table "0" indicates that no filter indicator(s) are set from the corresponding filter indicator category, and "1" indicates that one or more filter indicators are set from the filter indicator category.

Legend

ENV	-	Environment/Category Filter
ID	-	Identity Filter
GEO	-	Geographic Area Filter
SP	-	Special Processing Filter
SIM	-	Simulation Filter

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

4.8 ANTISUBMARINE WARFARE

This section describes the relationship of Antisubmarine Warfare (ASW) to command, control, and surveillance. Those portions of the Link 16 interface design that support ASW are contained in appropriate portions of paragraphs 4.4, Surveillance; 4.10, Mission Management; 4.11, Weapons Coordination and Management; and 4.12, Control. Link 16 provides the vehicle by which parametric data may be exchanged between collectors (ASW assets) and analysis centers (ASW nodes) as well as the exchange of product data between ASW nodes and other JUs. The following describes the Link 16 interface design ASW capabilities. The Link 16 interface design provides for:

- a. Capabilities to meet the requirements for conducting ASW operations.
- b. Capabilities to provide ASW support to other warfare areas. These capabilities include but are not limited to:
 - (1) Coordination and control of ASW operations.
 - (2) Exchange of acoustic and other parametric data to support the development of:
 - (a) Tactical plot information.
 - (b) Threat identification.
 - (c) Threat assessment.

ASW can be conducted as an independent operation or as part of coordinated operations in close support of a task force. The interface has been designed to provide maximum flexibility in the rules for reporting information related to ASW in order to allow for differences in the ASW mission.

4.8.1 DEFINITIONS4.8.1.1 ANTISUBMARINE WARFARE (ASW)

Antisubmarine warfare involves the use of military assets to search for, detect, locate, track, classify, and attack/destroy a submarine threat to friendly forces.

4.8.1.2 SUBSURFACE SURVEILLANCE

Subsurface surveillance is the reporting of subsurface information to support the compilation of the general surveillance picture and the conduct of ASW.

4.8.1.3 NONANTISUBMARINE WARFARE COMMAND AND CONTROL JTIDS/MIDS UNITS

NonASW C² JUs are C² units that have no organic ASW capability other than to: (1) request ASW product data, (2) use ASW product data in their own surveillance systems, (3) coordinate activities of weapon systems with other C² JUs, and (4) control nonC² weapon platforms.

4.8.1.4 COMMAND AND CONTROL JTIDS/MIDS UNITS (ANTISUBMARINE WARFARE NODE)

C² JUs (ASW node), in addition to the usual C² functions, possess organic ASW processing capability. An ASW node has the capacity to collect, coordinate, and analyze parametric data and derive product data.

4.8.1.5 NONCOMMAND AND CONTROL JTIDS/MIDS UNIT (ANTISUBMARINE WARFARE ASSET)

NonC² JUs (ASW asset) may be either an ASW collecting/reporting unit or an ASW weapons platform. ASW assets may communicate with ASW nodes and/or with one another.

4.8.2 ANTISUBMARINE WARFARE MESSAGE DESCRIPTIONS

ASW related messages are listed in Table 4.8-1. The number and name of each message is listed in the left column of the table. In the two columns

immediately to the right of the message number and name are the purpose and reference paragraph numbers for related information about that particular message. These messages will be supplemented, when necessary, by other messages from various functional areas such as PPLI, Surveillance, and Control in order to provide all the necessary information to perform ASW missions.

TABLE 4.8-1. Summary of Messages Supporting Antisubmarine Warfare

MESSAGE NUMBER AND NAME	ASW MESSAGE PURPOSE	REFERENCE PARAGRAPH
J2.4 SUBSURFACE (MARITIME) PPLI MESSAGE	REPORTS SUBSURFACE JU'S NETWORK PG STATUS, IDEN- TIFICATION, AND POSITION.	4.3
J3.0 REFERENCE POINT MESSAGE	THE REFERENCE POINT MESSAGE REPORTS ASW POINTS, LINES, AREAS, AND SONOBUOYS.	4.4.3.1 4.8.4
J3.4 SUBSURFACE (MARITIME) TRACK MESSAGE	EXCHANGES SUBSURFACE SUR- VEILLANCE TRACK INFORMATION.	4.4.5
J5.4 ACOUSTIC BEARING/ RANGE MESSAGE	REPORTS ACOUSTIC BEARING AND/OR RANGE OF CONTACTS.	4.8.4.2
J9.0 COMMAND MESSAGE	COORDINATION OF ASW COMMAND ACTIVITIES BETWEEN C ² JUs.	4.11.2.1
J10.2 ENGAGEMENT STATUS MESSAGE	REPORTS STATUS OF ASW WEAPON ENGAGEMENTS.	4.11.2.3
J13.4 SUBSURFACE (MARITIME) PLATFORM AND SYSTEMS' STATUS MESSAGE	PROVIDES THE CURRENT STATUS OF A SUBSURFACE (MARITIME) PLATFORM TO INCLUDE OPERA- TIONAL STATUS AND ON BOARD SYSTEMS' STATUS.	4.12.1.2.11

4.8.3 ANTISUBMARINE WARFARE APPLICATIONS

Future C² systems will contain greater flexibility and ability to exploit the use of ASW assets and provide increased analytical capacity. This, coupled with JTIDS communications, will permit a wide range of cooperative nonC² and C² activities to interact more effectively with the changing tactical

situation. At higher levels, this means that C² IUs may reassign ASW assets in real-time to new missions in support of other C² IUs, not only in performing limited ASW functions but even to the extent of overall assignment changes. Such flexibility implies the capability to dynamically update both parametric and product databases and to disseminate information among subscribers.

Accordingly, ASW data exchange on Link 16 is characterized in several ways. Data flow design permits dynamic, real-time reaction to situations. Data dissemination design permits integration of nonC² ASW assets, C² IUs and other IU assets, as well as the exchange of ASW data between C² IUs. There are provisions for requests and commands concerning ASW data and for ASW action among C² IUs, nonC² ASW assets, and nonC² weapons platforms. ASW participants will be able to perform their missions in close coordination with other combat units participating in the tactical warfare.

Systems implementing Subsurface Surveillance may also use ASW data to support threat determination. The information exchange within the Subsurface (Maritime) Track and Acoustic Bearing/Range messages satisfies the needs of command, control, coordination, and surveillance systems.

There are requirements for the exchange of parametric ASW data for association purposes and to support weapon employment decisions. Those parametric data may be obtained from real-time, on-scene measurement or from library held values of ASW nodes. When available and requested, whether preplanned or ad-hoc, parametric data may be associated with any track. While multiple acoustic frequencies generated by one target platform may be concurrently associated with one track, ASW nodes with that information would tailor or limit the data to the minimum needed by the requesting unit to accomplish its mission. ASW nodes may be tasked to provide timely bearings to support targeting.

ASW acoustic bearings and/or ranges are reported routinely for correlation, coordination, or other purposes. When they are the only means of locating the threat/target/object, single ASW bearings and/or ranges may be reported on the Surveillance Network PG. The data passed over the Surveillance Network PG will normally be limited to product information.

ASW acoustic bearings and/or ranges, either singularly or in conjunction with other types of lines or bearings, may be used to establish fixes from which vehicular tracks may be developed. ASW nodes will report fixes over the Surveillance Network PG. ASW tracks derived from sequential fixes will be reported on the Surveillance Network PG in the J3.4 message.

Tactically significant ASW information including parametrics may be passed on the Surveillance Network PG.

4.8.4 ASW MISSION DATA

Described within this section are those messages used to provide data in support of the ASW mission. The messages described in this section are:

a. J3.0 Reference Point message for transmission of ASW points, lines, areas, and sonobuoys.

b. J5.4 Acoustic Bearing/Range message.

4.8.4.1 ASW POINTS, LINES, AND AREAS

A C² JU shall also be capable of reporting ASW Points on the Surveillance net as appropriate or when sufficient data to report a subsurface track may not be available. The ASW Reference Point types are contained in the Point Type/Point Amplification table used in the J3.0 message.

This information can be associated with other data for the purpose of developing a subsurface track reported on the Surveillance net.

The J3.0 message is also used to report the location and amplification data of deployed sonobuoys. This information is used for mission planning and coordination of ASW assets. A C² JU shall also be capable of reporting a sonobuoy pattern reference position and type of sonobuoy pattern barrier on the Surveillance net.

4.8.4.2 ACOUSTIC BEARING/RANGE MESSAGE

The J5.4 Acoustic Bearing/Range message provides the capability of reporting lines-of-bearing and/or ranges to a detected submarine or surface vessel. The use of this message is intended to furnish the bearings/ranges from ASW sensors on board surface vessels or ASW sensors aboard aircraft. The setting of the Bearing Report Type and Sensor fields is critical to the analysis of the bearings produced by either of the above platforms, leading to decisions for reporting of a track in a J3.4 Subsurface (Maritime) Track message. Associated acoustic parametric information may be provided to correlate with other data for the purpose of developing a subsurface track reported on the Surveillance Network PG. Additionally, the J5.4 message may be used to report acoustic bearings/ranges on the Surveillance Network PG when deemed tactically significant.

4.8.5 EXERCISE INDICATOR

The Exercise Indicator and the Identity Amplifying Descriptor fields in the J5.4 message always refer to the Reference TN.

4.9 THREAT WARNING

Threat warning information is exchanged on the interface using the J15.0 Threat Warning message.

4.9.1 THREAT WARNING PROCEDURES

a. Threat warning information is exchanged on the interface to provide immediate notification of impending hostile threats. The Threat Warning message is originated by any JU having knowledge of a threat to either a JU or another friendly track/point, and is independent of track reporting and R². NonC² JUs shall only initiate a J15.0 message if the Threat TN is already being reported on the interface. Threat warning information shall be exchanged on the Surveillance NPG. The J15.0 shall be used to initiate a track when immediate notification is necessary and the threat track is not currently being reported on the Surveillance NPG. If a J15.0 is used to initiate a track, the initiating unit shall also report the threat in a J3 series message if the threat still exists. The Threat TN shall be used in the J3 series message to allow for TN continuity. The Threat TN shall be the same as the surveillance track when the surveillance track already exists on the interface.

b. When the J15.0 is used to initiate a track, Threat Posture set to value 5, Cancel, shall be used as a "drop track" if a surveillance track has not been initiated. If a surveillance track has been initiated, Threat Posture = 5 applies to the J15.0 only and has no relation to the J3 series message being transmitted.

c. Upon receipt of a J15.0, JUs shall break all local filters on the Threat TN.

4.9.2 THREAT WARNING ADDRESSING

a. When possible, the message should be addressed to the unit responsible for protection of the targeted unit. When the target is the addressed unit, the Targeted TN shall be the Addressee TN.

b. The J15.0 shall be addressed to the collective address when:

(1) The message originator is in doubt as to the unit assigned to protect the targeted unit.

(2) When the Targeted TN is not a JU and it is tactically advantageous for multiple platforms to be alerted to a threat against an individual platform, e.g., High Value Asset.

(3) The threat is general in nature and applies to many or all JUs and friendly tracks/points. (In this case, Targeted TN shall be set to No Statement).

c. It should be noted that although the message may be addressed to an individual platform, it may be advantageous to be addressed to the collective address since it is often tactically desirable for multiple platforms to be aware of a threat against an individual platform, e.g. High Value Assets.

4.9.3 THREAT WARNING MESSAGE CONTENTS

a. The J15.0 Threat Warning message contains information to warn a unit or group of units of an impending hostile threat and shall include sufficient information to establish a track file. This allows the operator to decide what tactics might be employed to counter the threat. The message includes but is not limited to the following information:

(1) Addressee TN (collective or as reported in PPLI).

(2) Threat TN (either originated or as reported in Surveillance).

(3) Targeted TN (as reported in PPLI or Surveillance).

(4) Threat Posture, e.g., Search/Surveillance, Ready to Launch/Fire, Directed to Engage, Cancel.

(5) Threat Type, e.g., Aircraft, Ship.

(6) Threat Weapon, e.g., Heat Air-to-Air Missile, HARM.

- (7) Location of Threat.
- (8) Course, Speed, Altitude, Threat Fuel state.
- (9) Threat Strength (Raid Size).
- (10) Specific Type of Threat, e.g., Mig 21, SA-6.

b. The Exercise Indicator field is used in conjunction with the Threat TN field and will always be set the same as in the surveillance message reporting that track.

4.9.4 TIMELINESS

a. It is imperative that the warning of the threat be received on a timely basis. This implies several characteristics in the processing of the message:

- (1) It must not be filtered.
- (2) Priority of the data should assure transmission ahead of any other type of data. Response time shall be the minimum time allowed.
- (3) The J15.0 message shall be transmitted on the Surveillance Network PG.

4.9.5 RELATING THREAT WARNING INFORMATION

a. Threat warning of affected targets or tracks consists of coupling the Targeted TN with the Threat TN. As such, the Targeted TN must be an active surveillance track, point, or PPLI except when the Threat is general in nature (addressed to the collective address) when the Targeted TN may be No Statement, see paragraph 4.9.2b(3).

b. Since the capability exists in the J15.0 message to report hostile to friendly couplings between two TNs regardless of environment/category, the J15.0 shall not be used to report pairings or engagements that are specified for reporting in the J10.6 Pairing message or the J10.2 Engagement message.

Systems shall not allow the J15.0 message that couples two TNs to replace pairings or engagements established by the J10.6 or J10.2 messages. When display of both types of couplings or pairings/engagements is implemented, i.e., J10.6/J10.2 and J15.0, they must be unique so as to avoid operator misinterpretation. J15.0 couplings may overlay J6.0 pairings and engagements.

4.10 MISSION MANAGEMENT

Commanders must manage resources to effectively employ weapon systems to meet operational objectives in a dynamic tactical environment. The Mission Management function on Link 16 provides for the exchange of information between C² JUs necessary for monitoring tactical situations and requesting and responding to requests for immediate support requirements. This includes, but is not limited to, those reports and statuses required by the tactical commander to effect mission requests; air, surface (maritime), subsurface (maritime), land (ground) tasking orders; sortie allotments; mission employment and allocation; and in-flight and mission reports. Normally, the command level that implements this functional area does not directly control weapon systems but is responsible for the timely allocation of resources between subordinate C² JUs. This function shall be supported principally by voice, teletype or character-oriented data links; however, certain requests, reports and other information may be required in real-time or near real-time.

4.10.1 MISSION MANAGEMENT INFORMATION EXCHANGE REQUIREMENTS

Table 4.10-1 lists the elements of information exchanged within the Mission Management function. Information requirements may translate into one or more data elements and may require more than one word or message to exchange all of the elements.

4.10.1.1 MISSION CORRELATOR

A mission correlator is a unique number assigned to all JUs participating in a specific overall mission. This number allows the identification and isolation of the associated JUs. The mission correlator is not synonymous with the mission number assigned to a specific aircraft or flight of aircraft. The mission correlator may be the same for numerous mission numbers. For example, one mission correlator would be assigned to a strike mission and the supporting, i.e., pre- and post-strike tankers, CAP aircraft, EW support aircraft, an aircraft for that strike and the forward air controller (FAC) aircraft. Through display filtering by mission correlator, all the mission participants can be identified.

4.10.2 MISSION MANAGEMENT MESSAGE DESCRIPTIONS

The Link 16 messages used in mission management are described below.

TABLE 4.10-1. Mission Management Information Exchange Requirements
(Preliminary)¹

ELEMENTS	NOTES
IMMEDIATE TASKING/IMMEDIATE REQUESTS	
STATUS OF FRIENDLY FORCES	INCLUDES STATUS OF JUs AND NON-JTIDS UNITS.
FORCE COMPOSITION	INCLUDES THE COMPOSITION OF TASK FORCE ELEMENTS, FLIGHTS, GROUND UNITS, ETC.
MISSION DEGRADE	INDICATES CHANGES IN A WEAPON SYSTEM'S SUPPORTING PLATFORM'S ABILITY TO ACCOMPLISH AN ASSIGNED MISSION.
MISSION RESULTS	INCLUDES BATTLE DAMAGE ASSESSMENT AND STATEMENT OF MISSION SUCCESS.
FORWARD LINE OF OWN TROOPS (FLOT)/ FORWARD EDGE OF THE BATTLE AREA (FEBA)/ FIRE SUPPORT COORDINATION LINE (FSCL)	
NAVIGATIONAL AIDS AND SUPPORT FACILITIES STATUS	SUPPORT FACILITIES INCLUDE AIRFIELDS, AIRCRAFT CARRIERS, AND GROUND STAGING AREAS.
WEATHER	

NOTE

1 THIS LIST IS NOT ALL INCLUSIVE, NOR ARE THE ELEMENTS LISTED IN ORDER OF IMPORTANCE. INFORMATION REQUIREMENTS MAY TRANSLATE INTO ONE OR MORE DATA ELEMENTS AND MAY REQUIRE MORE THAN ONE WORD OR MESSAGE TO EXCHANGE ALL THE ELEMENTS.

4.10.2.1 IMMEDIATE TASKING MESSAGE

The Immediate Tasking message (TBD) is used by C² JUs to direct subordinate JUs to perform specific tasks in support of the overall mission or specific missions. This message provides flag commanders the capability to reallocate resources in real-time in response to changes in the tactical situation.

4.10.2.2 MISSION RESULTS MESSAGE

The Mission Results message (TBD) is used to report results of missions in near-real-time to C² JUs responsible for monitoring the tactical situation and for immediate tasking/reallocation of resources in a dynamic tactical environment.

4.10.2.3 AIRFIELD STATUS MESSAGE

The J13.0 Airfield Status message is used to report significant changes in the capability of an airbase with its supporting facilities or an aircraft carrier, to support joint operations and to conduct planned or anticipated operations.

4.10.2.4 FIRE SUPPORT COORDINATION MEASURES MESSAGE

The Fire Support Coordination Measures message (TBD) is used to inform C² JUs, in near-real-time, of current significant fire support coordination measures, such as FLOT, FEBA, FSCL, airspace coordination areas, and no fire areas.

4.10.2.5 IMMEDIATE REQUEST FOR SUPPORT MESSAGE

The Immediate Request for Support message (TBD) is used to forward such immediate mission requests as close air support (CAS), artillery fire, reconnaissance, search and rescue, and tactical airlift.

4.10.2.6 WEATHER OBSERVATION/FORECAST MESSAGE

The Weather Observation/Forecast message (TBD) is used to inform C² JUs of current weather observations or forecasts within the tactical operational area.

4.10.2.7 SEVERE WEATHER REPORT MESSAGE

The Severe Weather Report message (TBD) is used to inform C² JUs of severe weather conditions that may impact tactical operations.

4.10.2.8 ATMOSPHERIC WEATHER REPORT MESSAGE

The Atmospheric Weather Report message (TBD) is used to inform C² JUs of weather conditions of specified atmospheric levels.

4.10.3 MISSION MANAGEMENT PROCEDURES AND PROTOCOLS

Procedures and protocols for this area remain to be determined.

4.11 WEAPONS COORDINATION AND MANAGEMENT

The Weapons Coordination and Management function includes those activities required to accomplish weapons employment and to prevent mutual interference during tactical operations. Operational commanders (OPNL CDRs) must have the capability to direct the activities of controlling units and the employment of weapons. Controlling units must have the capability to coordinate their control actions and to transfer control of weapons systems to other controlling units in real-time. The Weapons Coordination and Management function on Link 16 provides information exchange between C² JUs that manage or directly control both weapons systems (e.g., fighter aircraft, surface-to-air missiles (SAMs), etc.) and support platforms (e.g., reconnaissance, cargo, etc.). The Weapons Coordination and Management function is monitored by nonC² JUs as necessary to compile the tactical picture. However, nonC² JUs do not originate Weapons Coordination and Management data. The Weapons Coordination and Management function is interactive with the Control function and the Mission Management function. It is supported by the PPLI function, the Surveillance function, and the EW/Intelligence function.

4.11.1 WEAPONS COORDINATION AND MANAGEMENT INFORMATION EXCHANGE REQUIREMENTS

Table 4.11-1 lists the elements of information exchanged within the Weapons Coordination and Management function. The purpose of the table is to provide general comprehension of the types of information exchange requirements within the Weapons Coordination and Management function and to relate these requirements to messages, protocols, and procedures. Information requirements may translate into one or more data elements and may require more than one word or message to exchange all of the elements.

4.11.2 WEAPONS COORDINATION AND MANAGEMENT MESSAGE DESCRIPTIONS

The Weapons Coordination and Management messages are described below. These messages shall be supplemented, when necessary, by messages from other functional areas such as PPLI, Surveillance, EW/Intelligence, and Control in order to provide all the necessary information to perform Weapons Coordination and Management.

TABLE 4.11-1. Weapons Coordination and Management Information Exchange Requirements¹

ELEMENTS	PARAGRAPH
COMMANDS	4.11.3.1
MISSION CHANGE	4.11.3.1
CONTROLLING UNIT REPORTS	4.11.3.2
HANDOVER INFORMATION	4.11.3.2
CONTROLLING UNIT CHANGE/CHANNEL/VOICE CALL SIGN	4.11.3.2.2
WEAPON SYSTEM/PLATFORM ENGAGEMENT STATUS	4.11.3.3.1
WEAPON SYSTEM/PLATFORM STATUS ²	4.11.3.3.2
PAIRING INFORMATION	4.11.3.3.3

NOTES

- 1 THIS LIST IS NOT ALL INCLUSIVE, NOR ARE THE ELEMENTS LISTED IN PRIORITY OF IMPORTANCE. IT SHOULD BE NOTED THAT INFORMATION REQUIREMENTS MAY TRANSLATE INTO ONE OR MORE DATA ELEMENTS AND MAY REQUIRE MORE THAN ONE WORD OR MESSAGE TO EXCHANGE ALL THE ELEMENTS.
- 2 ADDRESSED HERE AS A PROCEDURAL REQUIREMENT BUT CONTAINED IN THE APPROPRIATE FUNCTION OF CONTROL.

4.11.2.1 COMMAND MESSAGE

The J9.0 Command message is used by controlling units to direct other controlling units in weapons control activities and to transmit general alert conditions and weapons condition orders. Weapons control activities include directions to launch aircraft, return aircraft to base, transfer control of aircraft to another controlling unit, direct weapons systems engagement/disengagement for air defense, direct Air Support Operations (ASO) activities and direct antisubmarine warfare (ASW) operations.

4.11.2.2 ENGAGEMENT COORDINATION MESSAGE

The J9.1 Engagement Coordination message provides the means for two or more elements to coordinate engagements in order to conduct more efficient engagements and to reduce the probability of wasted resources.

Engagement Coordination includes those activities between two or more weapon systems with common or shared defense responsibilities within an area of operations or theater. Weapon systems must have a means of exchanging options, strategies and expectations of support in order to ensure adequate defense of defined assets and effective use of limited resources.

A primary example of engagement coordination is the upper tier/lower tier defense strategy for theater ballistic missile defense. Coordination is facilitated through the use of the J9.1 Engagement Coordination message. The J9.1 Engagement Coordination message is used to advise a lower tier/adjacent system that support on a particular engagement is desired; and to advise the requesting system that support to that engagement can or cannot be provided.

4.11.2.3 ENGAGEMENT STATUS MESSAGE

The J10.2 Engagement Status message provides the status of an engagement between the Reference TN and the Target TN. This message also provides an indication of the effectiveness of an engagement as well as a Heads Up warning to denote that the Source TN is unable to assure complete destruction of the target and that a threat remains. The Engagement Status message also provides a means of reporting a time of predicted intercept of the Target TN by a Friendly Weapon TN (intercept missile) from which the predicted intercept location may be determined. The Engagement Status message also provides a means of reporting the actual time of intercept for the Target TN from which the actual intercept location may be determined.

4.11.2.4 HANDOVER MESSAGE

The J10.3 Handover message provides the data necessary to perform a digital handover of controlled aircraft between controlling units. The data includes the Link 4A Address and Voice Call Sign of the controlled aircraft, and if the aircraft is engaged or paired, the Objective TN of the entity the aircraft is engaging or is paired to. The J10.3C1 Handover continuation word 1 is used to provide data concerning the new Control Channel, Voice Frequency/Channel, Link 4A Frequency, IFF data, and radio information. The J10.3C2 Handover continuation word 2 is used to provide the controlled aircraft's Mission Correlator.

4.11.2.5 CONTROLLING UNIT REPORT MESSAGE

The J10.5 Controlling Unit Report message is used by C² JUs with air control missions to indicate the aircraft they have under their control.

4.11.2.6 PAIRING MESSAGE

The J10.6 Pairing message is used to indicate the type of pairing between a friendly TN and the TN of another track or point. The J10.6 message is not used for the same purpose as the J7.2 Correlation message or the J7.7 Association message.

4.11.2.7 INTERRELATIONSHIPS BETWEEN J9.0, J10.2, J10.6, J12.0, AND J12.6 MESSAGES

As stated in paragraph 4.11, the Weapons Coordination and Management function and the Control function are interactive. As such, the transmission/reception of a specific message, word, or data element within a function will cause the transmission of a specific message, word, or data element within the other function. Specifically the J9.0, J10.2, J10.6, J12.0 and J12.6 messages are dependent in such a manner as to necessitate the same interpretation of their interrelationship among all interfacing JUs. When a system that has control capability elects to implement a specific J9.0 Command, Tables 4.11-2, 4.11-3, 4.11-4, and 4.11-5 require that the system also implement for transmission the corresponding J12.0 Mission Assignment Discrete (MAD) and J10.2 Weapon Engagement Status (WES) or J10.6 Pairing Action and for reception the corresponding J12.6 Status Information Discrete (SID). Likewise, when a system chooses to implement a specific J12.0 MAD, even though it is not obligated to implement all the corresponding J9.0 Commands, it shall implement the corresponding J10.2 WES or J10.6 Pairing Action, i.e., if a system chooses to implement the J9.0 Command value 15, Cease Proceeding to Point, it shall also implement the J12.0 MAD value 3, Recall, and the J10.6 Pairing Action value 15, Terminate Pairing. As the system is required to implement the J12.0 MAD value 3, Recall, it is not obligated by the tables to also implement the J9.0 Command value 17, Cease Conducting Procedures Indicated, or 19, Cease Duties Indicated. The tables establish requirements only when read from left to right. These tables do

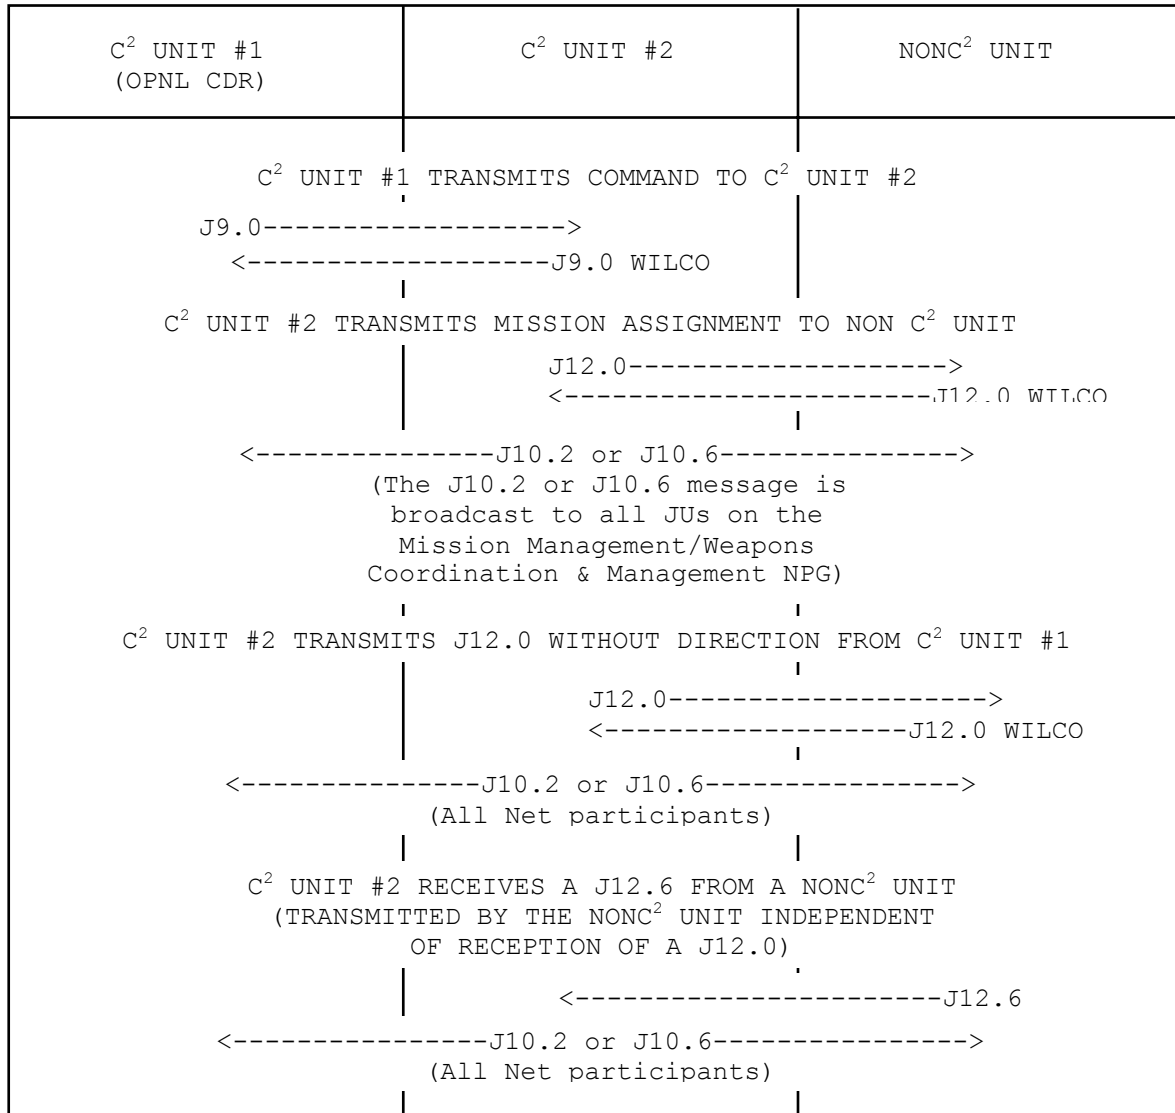
not imply any data forwarding requirements. The following tables specify this interrelationship.

Table 4.11-2 depicts the message flow between units and can be used to supplement Tables 4.11-3, 4.11-4, and 4.11-5.

Tables 4.11-3, 4.11-4, and 4.11-5 represent the relationship between J9.0 Commands, J10.2 WESs, J12.0 MADs, and J12.6 SIDs.

Table 4.11-3 assumes a J9.0 message is sent between C² JUs and the receiving C² JU transmits either manually or automatically a corresponding J12.0 message to the nonC² JU. If a nonC² JU transmits a J12.0 WILCO message, the J10.2 column indicates the J10.2 WES value, or J10.6 message, if appropriate, to be automatically transmitted by the C² JU, as a result of that WILCO. This table is also used for J12.0 MADs that were originated without reception of a J9.0 message.

Table 4.11-4 is used for the remaining MADs that do not have a correlation with the J9.0 message, i.e., J12.0 messages that were originated by a C² JU but were not induced by reception of a J9.0 message. In this table, WES value 2, Weapon Assigned, is used most frequently because it is the most generic of the WES values. All other WES values have meanings that do not equate to any MAD value.

TABLE 4.11-2. Flow Diagram of Message Sequences
for Tables 4.11-3, 4, and 5¹

NOTE:

¹ The J10.6 Pairing values in the following tables do not mandate a Pairing being transmitted. However, if a Pairing is transmitted, the values specified in the tables shall be used.

MIL-STD-6016B

TABLE 4.11-3. J9.0, J12.0, J10.2, J10.6, and J12.6 Action Value Relationships
(Sheet 1 of 2)

J9.0 Command/WILCO	J12.0 MAD/WILCO ¹	J10.2 WES, J12.6 WES or J10.6 Pairing (If Pairing Transmitted)
0 - Weapons Free	25 - Weapons Free	N/A
1 - Weapons Tight	26 - Weapons Tight	N/A
2 - Engage	5 - Engage	4 - Firing/Missile In Flight/Engaging To Destroy
3 - Assign	8 - Investigate/ Interrogate	11 - Investigating/ Interrogating ²
4 - Cease Engage	7 - Break Engagement	8 - Engagement Broken
5 - Hold Fire	7 - Break Engagement ² 47 - Hold Fire ³	8 - Engagement Broken
6 - Cease Fire	7 - Break Engagement 46 - Cease Fire ³	8 - Engagement Broken
7 - Cover	31 - Cover	14 - Covering
8 - Salvo/Clear Aircraft	27 - Salvo/Clear Aircraft	N/A
9 - Assume Control	---Handover Sequence---	---Handover Sequence---
10 - Attack	41 - Attack	4 - Firing/Missile In Flight/Engaging To Destroy
11 - Cease Attack	42 - Cease Attack	8 - Engagement Broken
14 - Proceed To Point	12 - Divert	J10.6 (1 - General Pairing)
15 - Cease Proceeding To Point	3 - Recall	J10.6 (15 - Terminate Pairing)

NOTE:

¹ If the received J9.0 Threat Warning Condition field is set to value 1, White, 2, Yellow, or 3, Red, a J12.0 MAD set to value 28, Alert Condition White, 29, Alert Condition Yellow, or 30, Alert Condition Red, respectively, will be broadcast in addition to the indicated messages.

² For aircraft.

³ For SAM sites.

MIL-STD-6016B

TABLE 4.11-3. J9.0, J12.0, J10.2, J10.6, and J12.6 Action Value Relationships
(Sheet 2 of 2)

J9.0 Command/WILCO	J12.0 MAD/WILCO ¹	J10.2 WES, J12.6 WES or J10.6 Pairing (If Pairing Transmitted)
16 - Conduct Procedures Indicated (Command Mission: Search & Rescue Close Air Support Armed Reconnaissance Aerial Reconnaissance Suppression of Enemy Air Defenses	15 - Search and Rescue 20 - Close Air Support 40 - Armed Reconnaissance 22 - Aerial Reconnaissance 39 - Suppression of Enemy Air Defenses	J10.6 (1-General Pairing) J10.6 (5-Close Air Support Pairing) 2 - Weapon Assigned N/A 2 - Weapon Assigned
17 - Cease Conducting Procedures Indicated	3 - Recall	J10.6 (15 - Terminate Pairing)
18 - Assume Duties Indicated (Duty Assignment: Search & Rescue Combat Air Patrol)	15 - Search & Rescue 16 - Combat Air Patrol	J10.6 (1 - General Pairing) J10.6 (4 - Combat Air Patrol Pairing)
19 - Cease Duties Indicated	3 - Recall	J10.6 (15 - Terminate Pairing)
20 - Transfer Control	---Handover Sequence---	---Handover Sequence---
21 - Return To Base	4 - Return To Base	J10.6 (6 - Return To Base Pairing)
22 - Launch Alert Aircraft	N/A	N/A
23 - Investigate/ Interrogate	8 - Investigate/ Interrogate	11 - Investigating/ Interrogating
24 - Intervene	11 - Intervene	13 - Intervening
25 - Shadow	24 - Shadow	12 - Shadowing
28 - Priority Kill	6 - Priority Kill	4 - Firing/Missile In Flight/Engaging To Destroy

NOTE:

¹ If the received J9.0 Threat Warning Condition field is set to value 1, White, 2, Yellow, or 3, Red, a J12.0 MAD set to value 28, Alert Condition White, 29, Alert Condition Yellow, or 30, Alert Condition Red, respectively, will be broadcast in addition to the indicated messages.

² For Aircraft.

³ For SAM sites.

MIL-STD-6016B

TABLE 4.11-4. Mission Assignment Discretes not Corresponding to J9.0 Messages

J12.0 MAD/WILCO	J10.2 WES, J12.6 WES or J10.6 Pairing (If Pairing Transmitted)
1 - Refuel	J10.6 Pairing Transmitted ¹
2 - Orbit	J10.6 (1 - General Pairing)
9 - Clear To Drop	J10.6 (1 - General Pairing)
10 - Cease/Do Not Drop	J10.6 (15 - Terminate Pairing)
13 - Air-to-Surface	N/A
14 - Air-to-Air	N/A
17 - Precision Bombing	2 - Weapon Assigned
18 - Laser Designation	2 - Weapon Assigned
19 - Beacon Bombing	2 - Weapon Assigned
21 - Interdiction	J10.6 (2 - Interdiction Pairing)
23 - Escort	J10.6 (3 - Rendezvous Pairing)
28 - Alert Condition White	N/A
29 - Alert Condition Yellow	N/A
30 - Alert Condition Red	N/A
32 - Visual Identification	11 - Investigating/Interrogating
34 - Go to Voice	N/A
35 - High Interest Track Designation	N/A
36 - Cancel High Interest Track Designation	N/A
37 - Sensor Target Reports On	N/A
38 - Sensor Target Reports Off	N/A
43 - Related Mission Data	N/A
44 - Counter Air Attack	2 - Weapon Assigned
45 - Fighter Sweep	N/A
63 - Cease Mission	N/A

NOTE:

¹ If refuel is to a tanker, J10.6 (7 - Tanker Pairing), otherwise J10.6 (1 - General Pairing).

Table 4.11-5 depicts the J10.2 WES values that are transmitted as a result of receiving a J12.6 message from a nonC² JU. This table specifies the relationship between J10.2 WES values and J12.6 SID values.

J9.0 Command, J12.0 MAD, and J12.6 SID values of No Statement, Undefined, and those only transmitted between nonC² JUs are not included in the tables because reception of these values would not cause another message to be sent by a C² JU.

TABLE 4.11-5. J10.2 WES Resulting from Reception of a J12.6 Message

J12.6 SID	J10.2 WES
1 - Engaging or Attacking	4 - Firing/Missile In Flight/Engaging To Destroy
2 - Investigating ¹	11 - Investigating/Interrogating
3 - Missile In Flight/Weapon Released	4 - Firing/Missile In Flight/Engaging To Destroy
4 - New Sensor Target Report	N/A
5 - Cancel Sensor Target Report	N/A
6 - Track/Target Destroyed	5 - Effective/Target Destroyed/Grand Slam
7 - Disengaging	8 - Engagement Broken
8 - Target Partially Destroyed	6 - Partially Effective
9 - Heads Up/Mark Point/Point of Interest	N/A
10 - Lock On/Primary Designated Target or Designated Surface Target or Designated Ground Target	N/A
11 - Not effective	7 - Not effective
11 - Battle Damage Assessment Unknown	15 - Battle Damage Assessment Unknown
12 - Covering	14 - Covering
12 - Recommend Reattack	1 - Recommend Reattack

NOTE:

¹ If a previous J12.0 WILCO message for Intervene, Shadow, or Cover was received resulting in a J10.2 WES of Intervening, Shadowing, or Covering, respectively, being transmitted as depicted in Table 4.11-3, the C² JU may continue to repeat the previous J10.2 WES in lieu of Investigating/Interrogating.

4.11.3 WEAPONS COORDINATION AND MANAGEMENT PROCEDURES AND PROTOCOLS

The messages described above are used in conjunction with other messages to coordinate and manage weapons traffic. General procedures for use of those messages within the various activities are discussed below. Specific transmit/receive rules for individual messages are included with the message descriptions in Section 5, Parts 1, 2, and 3.

4.11.3.1 COMMAND PROCEDURES

Command procedures provide for the direction of C² activities and the promulgation of weapon condition orders and general alert conditions. These procedures are executed as follows:

a. Commands that are transmitted between C² JUs to direct C² JU activities using the J9.0I/J9.0E0 word sequence include Engage, Assign, Cease Engage, Salvo/Clear Aircraft, Assume Control, Engage Objective TN With Weapon System Specified, Break Engagement With Objective TN With Weapon System Specified, Proceed to Point, Cease Proceeding To Point, Conduct Procedures Indicated, Cease Conducting Procedures Indicated, Assume Duties Indicated, Cease Duties Indicated, Transfer Control, Return to Base, Launch Alert Aircraft, Investigate/Interrogate, Intervene, and Shadow. The J9.0C1 Command continuation word may only be added in two cases: firstly, with the commands of 21, Return to Base, and 22, Launch Alert Aircraft to provide communication data that may be transmitted to Friendly Weapon TN, when applicable, about the base to which to return or the controlling agency to receive the alert aircraft; secondly, with the commands 2, Engage, and 3, Assign, to communicate the Method of Fire. R/C is required for all command values that direct controlling unit activities, except as indicated below in paragraph 4.11.3.1.3.

b. Commands transmitted between C² JUs to promulgate weapon condition orders using the J9.0I word include Weapons Free, Weapons Tight, Hold Fire, Cease Fire, etc. R/C is required for all weapon condition orders, except as indicated below in paragraph 4.11.3.1.3.

c. General alert conditions are transmitted between C² JUs via the J9.0I word.

There is no provision in existing C² systems for automatic response to J9.0 message commands, other than machine receipts. Systems do, however, provide an automatic alert to operators who shall respond by taking actions that may include voice communication with an airbase, ground TACS, ship, or aircraft; or by taking console actions that result in automatic transmission of data in accordance with paragraphs 4.11, 4.12 and associated subparagraphs.

4.11.3.1.1 COMMAND AUTHORITY

The command structure may require that one or more JUs be delegated the authority to transmit the J9.0 message. In this case, the JU(s) so designated will be identified by a Source TN which is promulgated to all IUs. If the command authority is transferred between JUs, all participating JUs will be informed through voice communication or other communications media. Nevertheless, any unit within the interface may be designated authority to transmit J9.0 messages without having been previously identified as a unit with Command Authority. Operator validation, based on the Source TN of received J9.0 messages, is required to verify that such orders were originated by an IU with the appropriate designated authority. Original J9.0 messages shall not be automatically rejected by receiving systems on the basis of Source TN, to preclude automatic rejection of legal orders.

4.11.3.1.2 REQUIRED COMMAND VALUES

The JOC may direct command structures that require the passing of messages containing command, weapons status, and engagement status information between IUs of different Services/Agencies. Therefore, those messages must be capable of being exchanged between Services/Agencies in support of and in accordance with operational doctrine. The Command field values of the J9.0 message which shall be implemented by all interfacing C² JUs and must be capable of inter-Service/Agency exchange are identified in Appendix A, Minimum Implementation.

4.11.3.1.3 ADDRESSING OF COMMAND MESSAGES

Original J9.0 messages (R/C field set to value 0 or 1) with the Command field values of Salvo/Clear Aircraft, Hold Fire, Cease Fire, Weapons Tight, Weapons Free, Conduct Procedures, and Cease Conducting Procedures may be addressed to

individual JUs by using the Addressee TN field with the applicable TN set (R/C field set to value 0) or to all JUs by setting the Addressee TN field to the collective address of 00177 octal (R/C field set to value 1). Machine receipt J9.0 messages (R/C field set to value 2) are not transmitted in response to commands addressed to the collective address of 00177 octal.

4.11.3.1.4 COMPLIANCE WITH HOLD FIRE COMMAND DEFINITION

Receipt of the J9.0 message with the Command field set to value 5, Hold Fire, shall prevent launch of the missile and, upon compliance, shall cause transmission of a J10.2 message with the WES field set to value 8, Engagement Broken, if any engagement status has been reported. Because of the nature of certain missiles, strict compliance with the processing required by the definition of the J9.0 message with the Command field set to value 5, Hold Fire, is not possible, i.e., unable to destroy missile in flight. When the specific requirements of the Hold Fire cannot be met after the missile launch due to the nature of the weapon system, J10.2 engagement status reports shall continue until one of the following occurs:

- a. A manual J10.2 message with the WES field set to value 5, Effective/Target Destroyed/Grand Slam, report is generated.
- b. The missile is no longer capable of destroying the target, at which time a J10.2 message with the WES field set to value 8, Engagement Broken, shall be generated.

4.11.3.1.5 USE OF COMMAND MESSAGE FOR ASO MISSIONS

Commands may be provided to C² JUs controlling ASO aircraft by use of the J9.0 message. The J9.0I/J9.0EO word sequence will be used to provide C² JUs with information necessary to order missions and assign targets to nonC² units under the control of the receiving C² JUs as described in the following paragraphs.

- a. The J9.0I word Command field values 10, Attack, and 11, Cease Attack, shall be utilized to direct ASO assets against specific targets. The Objective TN is the target to be destroyed. The Friendly Weapon TN may be set to the TN of the aircraft assigned the mission. The Weapon Type field in

the J9.0I word shall be set to Aircraft. If the Friendly Weapon TN is set to No Statement, then the Addressee TN will assign a specific nonC² unit to accomplish the mission.

b. Commands to C² JUs to conduct other ASO missions are accomplished by utilizing J9.0I word Command values 16, Conduct Procedures Indicated, and 17, Cease Conducting Procedures Indicated. The Objective TN is the target for the mission. The Command Mission field in the J9.0E0 shall be set to value 27, Close Air Support, 28, Armed Reconnaissance, 29, Aerial Reconnaissance, or 30, Suppression of Enemy Air Defenses. Fragmentary orders may provide additional information and may be referenced by utilizing the J9.0E0 Fragmentary Order Number field. To direct an Addressee TN, i.e., a controlling C² JU, to use a specific nonC² unit to perform a mission, the Friendly Weapon TN is set to the TN of the nonC² unit. If the Friendly Weapon TN is set to No Statement, then the Addressee TN will assign a specific nonC² unit to accomplish the mission.

c. Control of nonC² JUs on ASO missions is accomplished in the Control NPG utilizing J12 series messages. Detailed protocols and procedures are found in Section 4.12.

4.11.3.2 PROCEDURES FOR CONTROL OF NONC² UNITS

To coordinate and manage the control of nonC² units, systems with nonC² unit control missions shall have the capability to indicate which nonC² units they have under their control and to effect transfer of nonC² unit control between controlling units. Controlling units are those C² JUs capable of performing nonC² unit control functions, such as positive control, flight following, radar advisory, etc. Procedures for assumption of control, termination of control, and handover of control are discussed below.

4.11.3.2.1 ASSUMPTION OF CONTROL

When a controlling unit has completed voice or digital communications as described in paragraph 4.12.1.3.7, assuring that both the nonC² unit and the controlling unit understand that the nonC² unit is under its control, the controlling unit initiates transmission of a series of J10.5 messages. A controlling unit shall transmit a J10.5 message for each unit under its

control. Reporting of controlling unit status on the same nonC² unit by more than one C² JU shall cause operator alerts at the conflicting units. R² for surveillance data on a controlled nonC² unit is determined as for any other track.

4.11.3.2.2 HANDOVER OF CONTROL

The Link 16 digital handover of controlled nonC² units is performed as described in this paragraph. Procedures for the handover of a remotely piloted vehicle (RPV)/missile are TBD. The following procedures address Request For Assume Control, Request for Transfer Control, and Handover Resulting from a Command Message. Controlling C² JU A is the original controlling C² JU and controlling C² JU B is the new controlling C² JU.

a. Request for Assume Control. C² JU A requests C² JU B to assume control of a nonC² unit by transmitting an original J10.3I/J10.3E0 word sequence with the R/C field set to value 0. The J10.3E0 word provides the following nonC² unit information as appropriate: Voice Call Sign, the Objective TN to which it is assigned/engaged, and its Link 4A Address. The Request for Assume Control field in the J10.3 message shall be set to value 0 or 1. The Request for Assume Control field set to value 1 shall be used only when transferring control of a nonC² unit that is engaging, i.e., C² JU A is transmitting J10.2 messages with the WES field set to values 2-7 or 11-14 on the nonC² unit that is the subject of the handover. The nonC² unit may be engaged to one or more targets although only one target can be reported in the J10.3E0 word Objective TN field. Therefore, C² JU B should alert the operator to all J10.2 engagements currently held for the nonC² unit when the original J10.3 message is received. The Request for Assume Control field shall be set to value 0 when used to handover nonC² units that are not engaging. A J10.3C2 word may be added to transmit the Mission Correlator assigned to the nonC² unit. C² JU B transmits a machine receipt J10.3 message with the R/C field set to value 2. Upon receipt of the handover request, the operator in C² JU B will be alerted. The operator then performs console action(s) that cause transmission of a WILCO or a CANTCO J10.3 message with the R/C field set to value 3 or 6. The J10.3 message with the R/C field set to value 3, WILCO, shall be a J10.3I/J10.3E0/J10.3C1 word sequence with the information that C² JU A must provide to the nonC² JU in a J12.4 Controlling Unit Change message to assist in performing the handover.

C² JU A transmits a machine receipt J10.3 message with the R/C field set to value 2 to C² JU B in response to the C² JU B J10.3 message with the R/C field set to value 3, WILCO. If the nonC² unit is an active JU, the change of control is executed using J12.4 messages as described in paragraph 4.12.1.3.7b. Upon receipt of a J12.4 message with the R/C field set to value 3, WILCO, from the nonC² JU, C² JU A shall transmit a J10.5 Controlling Unit Report with the Controlling Unit Status and the Handover Indicator fields set to value 1 and shall cease reporting any J10.2 Engagement Status or J10.6 Pairing messages for the nonC² JU. After completion of the change of control in accordance with paragraph 4.12.1.3.7b, C² JU B shall indicate the completion of the handover by transmitting the J10.5 message and may begin transmission of the J12.X messages to the nonC² JU. C² JU A shall cease transmitting the J10.5 Controlling Unit Report message upon receipt of a J10.5 message from C² JU B. C² JU B shall transmit any J10.2 or J10.6 messages if C² JU A was reporting any engagements or pairings for the nonC² JU.

If for any reason the nonC² JU is unable to complete the handover with C² JU B in accordance with paragraph 4.12.1.3.7b, the nonC² JU may request control by C² JU A. If C² JU A assumes control again, it shall send a Cancel Handover Request to C² JU B and set the Handover Indicator field to value 0 in the J10.5 messages.

When the Request for Assume Control field is set to value 0 or 1, the J10.3C1 word shall be originated by C² JU B in its J10.3 message with the R/C field set to value 3, WILCO, response. The data in this J10.3C1 word shall provide information specified by C² JU B for control. As a minimum, it shall provide the Control Channel or Link 4A Frequency on which C² JU B desires to exercise control, unless control is to be performed by voice only. It may also provide the UHF Frequency or Channel Group A or B to be used for voice coordination (or control if both Control Channel and Link 4A Frequency fields are set to No Statement), secure radio information (Radio Type (UHF-AM or UHF-FM) and Secure Radio Indicator) about the UHF Frequency, the Mode III Code C² JU B desires the nonC² JU to use, or a request for the nonC² JU to Squawk Flash.

b. Request for Transfer Control. C² JU B may request control by transmitting the J10.3I/J10.3E0/J10.3C1 word sequence to C² JU A. The Request

for Assume Control field in the J10.3 message shall be set to value 2. All of the communications information in the J10.3E0 and J10.3C1 words apply to C² JU B. If available, the C² JU B Voice Call Sign shall be provided. The Link 4A Address shall be provided if Link 4A control is desired. As a minimum, the J10.3C1 word shall contain the Control Channel or Link 4A Frequency on which C² JU B desires to exercise control, unless control is to be performed by voice only. It may also provide the UHF Frequency or Channel Group A or B to be used for voice coordination (or control if both Control Channel and Link 4A Frequency fields are set to No Statement), secure radio information (Radio Type (UHF-AM or UHF-FM) and Secure Radio Indicator) about the UHF Frequency, the Mode III Code C² JU B desires the nonC² unit to use, or a request for the nonC² unit to Squawk Flash.

The J10.3C1 word is included in the original J10.3 message with the Request for Assume Control field set to value 2 and the R/C field set to value 0, and C² JU A is not allowed to alter any of the data in its WILCO reply. If C² JU A does not agree with any of the J10.3C1 data, its only options are voice communications prior to transmitting a WILCO, or transmitting a J10.3 message with the R/C field set to value 6, CANTCO. When the J10.3 message with the R/C field set to value 6 is transmitted, C² JU A maintains control.

c. Handover Resulting from a Command Message. Handovers may occur as a result of orders received in the J9.0 message. After receipt of an order, the receiving unit shall initiate the appropriate Request for Assume Control sequence as described in paragraphs a and b.

d. Specific protocols for implementing the J10.3 messages to accomplish the handover functions are contained in the following paragraphs:

(1) Platform and System Status Information. C² JU B may or may not have platform and system status information on the Reference TN. If not, C² JU B may request this information by transmitting the J7.1 Data Update Request message to C² JU A prior to transmitting a J10.3 message with the R/C field set to value 3, WILCO.

(2) Cancellation of a Handover. A C² JU may cancel a handover by transmitting a J10.3 message with the Cancellation Indicator field set to

value 1 anytime prior to reception of a Controlling Unit Report from the other C² JU in accordance with the following:

(a) Cancel Handover Request. C² JU A initiation of a J10.3 message to cancel a Handover Request shall inhibit transmission of the J12.4 message if it has not already occurred, and the handover is terminated. If C² JU A desires to regain control after receiving a Controlling Unit Report from C² JU B, it shall initiate a Request for Transfer of Control as described in paragraph b above.

(b) Cancel Request for Transfer of Control. C² JU B initiation of a J10.3 message to cancel a Request for Transfer of Control shall inhibit transmission of the J12.4 message from C² JU A if it has not occurred already and the handover is terminated. If the J12.4 message has been transmitted, C² JU A shall transmit a J10.3 CANTPRO message and C² JU B shall complete the transfer of control. If after transmitting the Controlling Unit Report C² JU B desires C² JU A to take control, C² JU B shall initiate a Handover Request to C² JU A.

In either of the cases above, if the nonC² JU is unable to contact C² JU B and returns to C² JU A, C² JU A shall transmit a J10.3 message with the Cancellation Indicator field set to value 1.

A J10.3 message transmitted to cancel a handover or transfer of control shall be a copy of the original request except that the Cancellation Indicator field shall be set to value 1 and the Addressee TN shall be set appropriately.

(3) Failure to Acknowledge. When a J10.3 original message has not been acknowledged in accordance with the transmit/receive rules, the host system shall alert the operator. The receipt of a WILCO, CANTCO, or CANTPRO response to an original message shall inhibit setting the alert for no acknowledgement. If a CANTCO or CANTPRO response message is received, the handover process via data link terminates and voice coordination may be required.

(4) Assumption of Control. C² JU B shall transmit the J10.5 message in accordance with paragraph 4.11.3.2.1. If the nonC² unit is

engaged/paired, C² JU B must initially transmit the locally held engagement status/pairing values on the engagements/pairings previously reported. Acceptance of an engaged/paired handover constitutes the acceptance of the engagements/pairings. (See paragraphs 4.11.3.3.1 and 4.11.3.3.3.)

(5) Duplicate Reporting of Control. Units receiving a J10.5 message from a Source TN different from that previously received shall accept the latest Source TN as the controlling C² JU.

4.11.3.2.3 TERMINATION OF CONTROL

When a controlling C² JU terminates control of a track or is going to drop a track from its local database which it has previously been reporting as a controlled track, a J10.5 message indicating termination of control shall be transmitted. If the controlled track is a JU, the controlling C² JU shall send a J12.4 message to the nonC² JU indicating termination of control. A J10.2 Engagement Broken message or a J10.6 Terminate Pairing message shall be sent only when an engagement is broken or the pairing is terminated. These messages are not transmitted solely as the result of terminating control of a track. Transmission of the J10.5 message and the J12.4 message, when appropriate, with the Controlling Unit Status field set to the terminating control value, completes the terminate control procedure. The J10.5 Terminate Control message is not to be used during a handover among C² JUs. For handover procedures between C² JUs, refer to paragraph 4.11.3.2.2. When performing a handover from a C² JU to a nonIU, the J10.5 Terminate Control message shall be transmitted by the C² JU.

4.11.3.3 REPORTING OF STATUS

All JUs shall report their own platform and system status. Controlling units shall report the platform and system status of units under their control that are not reporting their own status. If conflicting data are received at approximately the same time, data received from the platform shall take precedence. C² JUs shall have the capability to report the status of engagements conducted by own JU, by units under their control, and by nonIUs not under control. C² JUs also report pairings. Engagement status, platform and system status, and pairing status reporting procedures are described in the following subparagraphs.

4.11.3.3.1 REPORTING OF ENGAGEMENT STATUS

The reporting of engagement status for controlled units and other than controlled units is as follows:

a. Engagement Status for Controlled Units. The reporting of engagement status for controlled units is as follows:

(1) Only the controlling C² JU shall report the engagement status of a controlled unit in the J10.2 message. To report engagement status, a controlling C² JU must have the Reference TN under control. Engagement status shall be reported by the controlling C² JU in the following situations:

(a) Upon initiating or changing the engagement status of the Reference TN, but only after confirmation is received from the Reference TN. Confirmation is receipt of a J12.0 WILCO message, a J12.6 message as described in (f) below, a voice acknowledgement, or an operator observation. In the case of one-way communication, transmission of the order is considered confirmation.

(b) Upon accepting the handover of an engaging platform.

(c) Periodically, in accordance with the transmit/receive rules.

(d) In response to a J7.1 message containing either the Reference TN or Target TN.

(e) In response to a J7.1 message with the Weapon Status Data Request Indicator field set to value 1.

(f) Upon receipt of an initial J12.6 message with the SID field set to value 1, 2, 3, 6, or 7 from an engaging nonC² JU or a J12.6 message changing a previously reported engagement status.

(2) Engagements shall be terminated by transmitting a J10.2 message with the WES field set to value 5, Target Destroyed, or 8, Engagement Broken. If value 5, Target Destroyed, is used, the message shall be

transmitted in accordance with Table J10.2 until sensor contact is cancelled/lost.

(3) The controlling C² JU shall transmit a J10.2 message with the WES field set to value 5, Target Destroyed, or 8, Engagement Broken, to break an engagement when the engagement which that C² JU has been reporting is terminated.

b. Engagement Status for other than Controlled Units. In addition to the controlling unit reporting engagement status of controlled units as specified in paragraph 4.11.3.3.1a, all C² JUs that have a weapon capability shall have the capability to report their own engagement status in the J10.2 message. Further, all C² JUs may report the status of engagements conducted by nonIUs in the J10.2 message. Rules for reporting engagement status of other than controlled units are as follows:

(1) The Reference TN is the unit actually conducting the engagement. The Reference TN shall be set identical to Source TN for reports of engagements conducted by own JU.

(2) Other than the setting of the Reference TN, there is no difference between the capability and procedures required for the reporting of engagements conducted by own JU and those conducted by nonIUs that are not controlled units. The JU initially transmitting nonIU engagement status shall retain Engagement Status report responsibility until the nonIU engagement is terminated.

(3) The C² JU initiating engagement status reporting on a Target TN shall retain the responsibility for reporting the status until the engagement is terminated. The reporting of all engagements must be terminated. Termination consists of transmitting a J10.2 message with the WES field set to value 5, Target Destroyed or 8, Engagement Broken.

4.11.3.3.2 REPORTING OF PLATFORM AND SYSTEM STATUS

Individual unit platform and system status must be available to all C² JUs in the interface. JUs will use the appropriate J13 Platform and System Status message to report current status including stores, fuel, operational status,

host system's status, etc. The Voice Group A and B Channels reported in Platform and System Status messages shall be the channels on which the Reference TN is operating. C² JUs, weapons systems JUs, and support platform JUs shall report their own platform and system status and, under certain conditions described below, controlling C² JUs shall report the platform and system status of platforms under their control.

a. All JUs shall report their own platform and system status initially when entering the network, upon significant change of status, periodically in accordance with the transmit/receive rules, and for C² JUs in response to a J7.1 message. Platform and System Status messages shall be transmitted on the PPLI and Status Group B NPGs in accordance with paragraph 4.2.3.10.4.

b. The controlling C² JU shall report platform and system status on units under their control that do not report their own platform and system status. This will be done initially upon taking control, periodically in accordance with the transmit/receive rules, and in accordance with paragraph 4.2.3.10.4.

c. A C² JU that requires platform and system status on a controlled air track shall request the information from the C² JU controlling the platform, as indicated in the J10.5 message, by transmitting a J7.1 message with the Data Update Request Action field set to value 1, Data Update Request by TN. The controlling C² JU shall transmit the appropriate J13 message.

d. A C² JU that requires Platform and System Status on a C² JU shall request the information from the C² JU by transmitting a J7.1 Data Update Request by TN message containing the C² JU's TN as Reference TN.

e. C² JUs shall report platform and system status on units under their control when the controlled unit is in a Conditional Radio Silence mode. Also, when the controlling C² JU has not received a J13 message from the controlled unit for two update periods, the controlling C² JU shall begin transmitting periodic Platform and System Status messages on the controlled unit. When the controlled unit resumes transmission of Platform and System Status messages, the controlling C² JU shall cease its reporting.

f. Conflicting data may be received from different units reporting the status on a given platform. The acceptance priority is JU platforms' own status, then C² JUs exercising control over JU platforms.

g. The Voice Group A and B Channels reported in Platform and System Status messages shall be the channels on which the Reference TN is operating.

h. The J13.2C2 and J13.2C7 Type of Stores and Number of Stores fields shall be interpreted as follows:

(1) If the Type of Stores field is set to a value other than 0, No Statement, and the Number of Stores field is set to a value other than 63, No Statement, the aircraft's current specific onboard inventory (0 to 62 units) of that Type of Stores is reported.

(2) If Type of Stores is other than No Statement and Number of Stores is No Statement, that Type of Stores is currently carried by the aircraft but no data are being reported about the number of that Type of Stores.

(3) If Type of Stores is No Statement and Number of Stores is other than No Statement, the specific onboard inventory of an unspecified type of weapon is reported.

(4) If Type of Stores and Number of Stores are both No Statement, no data are reported.

4.11.3.3.3 C² JUS REPORTING OF PAIRING STATUS

C² JUs shall use the J10.6 message to indicate a pairing between a friendly track and another track or point. Pairing values shall not be used to pair a point or track for the purpose of indicating an engagement status. A pairing to a point must have been preceded by a J3 Surveillance message with the Point Amplification field set to a valid value. A JU that has been reporting a pairing on a track that is the subject of a completed handover shall cease transmitting the J10.6 message and shall not transmit a J10.6 message terminating the pairing on that track (see paragraph 4.11.3.2.2a). If the controlling C² JU reporting pairings becomes inactive, then all pairings

previously reported by that controlling C² JU are purged. If one of the paired TNs is dropped, the pairing is purged.

4.11.3.4 ENGAGEMENT COORDINATION PROCEDURES

When operating in a theater with shared defense responsibilities, systems may find it operationally effective and efficient to coordinate their engagements against common threats. The J9.1 Engagement Coordination message provides a means for two or more JUs to coordinate engagements in near real-time via Link 16. Engagement coordination is a cooperative relationship that does not, in and of itself, empower any participant JU with command authority, as defined in paragraph 4.11.3.1.1.

When two or more JUs operate in a cooperative defense posture, they may share engagement intent, method of fire (MOF), probability of kill (PK), tracking status, and support expectations via the J9.1 Engagement Coordination message. If the coordinating systems have common defended assets, the assets, and the priority to be given to each asset, may be reported to each system via the J3.0 Reference Point message. Participating JUs are responsible for developing specific coordination procedures, but they shall adhere to the following general guidelines.

a. The normal message exchange sequence begins with a JU's detection, or receipt of a potentially threatening track. The JU shall evaluate the nature of the threat to determine if:

- (1) the threat will be engaged,
- (2) the threat is eligible for coordinated engagement, and
- (3) support is needed.

Criteria for coordinated engagements shall be predetermined by the participating JUs. The JU will initiate the engagement coordination process by transmitting a J9.1 Engagement Coordination message with its engagement intent and/or support expectations.

b. Each threat shall be treated as a separate engagement coordination process.

c. The Engagement Coordination Action Value (ECAV) in the J9.1I word shall be used by a JU to indicate its engagement intentions, availability to provide support, or support expectations to other JUs participating in the engagement coordination activity.

(1) ECAV = 0, Intend to Engage, or ECAV = 1, Do Not Intend to Engage, is transmitted by a JU to announce its engagement intention against a target. No expectation of support is implied.

(2) ECAV = 2, Available for Support, or ECAV = 3, Not Available for Support, is transmitted by a JU as a response to the receipt of a J9.1 Engagement Coordination message with ECAV = 4, Support Expected. In addition, a JU may transmit a J9.1 Engagement Coordination message with ECAV = 2, Available for Support, or ECAV = 3, Not Available for Support, at any time to report its availability to support another JU.

(3) ECAV = 4, Support Expected, or ECAV = 5, Support Not Expected, is used when a JU intends to engage the threat. That is, JUs receiving these ECAVs may assume that the JU transmitting the message intends to engage the threat, and that the MOF is based on the expectation of support as indicated in the ECAV field.

d. A J9.1 Engagement Coordination message with ECAV = 0, Intend to Engage, ECAV = 4, Support Expected, or ECAV = 5, Support Not Expected, indicates an intention to engage and does not supplant the requirement to transmit the appropriate J10.2 Engagement Status message.

e. If a JU's availability changes after responding to a J9.1 Engagement Coordination message, the JU updates its availability status by transmitting another J9.1 Engagement Coordination message addressed to the JU that initiated the engagement coordination process.

f. A JU's MOF, as reported in the J9.1 Engagement Coordination message, reflects the JU's planned MOF against the referenced target.

g. The PK, as reported in the J9.1 Engagement Coordination message, is the predicted PK of the sending unit against the referenced target, based on the selected MOF. It does not reflect the combined PK of the participating JUs.

h. The Tracking Status field of the J9.1 Engagement Coordination message is used to indicate the reporting JU's tracking status even when that JU does not hold R² for the referenced track. It is not dependent on the engagement intent of the reporting JU and is not transmitted in lieu of a J10.2 Engagement Status message.

4.11.3.5 THEATER BALLISTIC MISSILE DEFENSE PROCEDURES

Theater Missile Defense (TMD) is defined as all measures taken to defeat, destroy, or neutralize enemy theater missiles employed against friendly forces and assets. The term theater missile (TM) applies to ballistic missiles, cruise missiles (CM), and tactical air-to-surface missiles (TASM) whose targets are within a given theater of operation. A ballistic missile is any missile which does not rely upon aerodynamic surfaces to produce lift and consequently follows a ballistic trajectory when thrust is terminated (JCS Pub 1-02).

The active portion of the TMD provides protection against theater ballistic missiles (TBM), CMs and TASMs, by destroying them in flight. Theater Ballistic Missile Defense (TBMD) is concerned with the active defense against the TBM portion of the total TM threat.

TBMD capable systems may be comprised of lower tier and upper tier missile defenses which provide critical asset and area defense. The TBMD systems may operate independently or as an integrated, multi-tiered system, or in geographically distributed enclaves. Lower tier systems will provide TBMD for designated critical assets, e.g., airfields, theater C² nodes, or seats of government as well as protecting theater targets, naval and maneuver forces, supply points, or critical weapon delivery systems. When integrated with area defense elements, lower tier systems will have the capability to operate collectively or independently primarily against short-range ballistic missiles as well as other tactical missiles (CMs and TASMs). Upper tier TBMD systems provide broad coverage, area defense against TBMs. Area defense

systems engage ballistic missiles at high altitude as early in their course as possible helping to negate the primary and secondary effects of mass destruction weapons, and provide for an overall larger defended area. When integrated with lower tier systems, area defense systems are capable of independent or cooperative operation to increase the overall defense effectiveness. The primary focus of upper tier systems is the medium-range ballistic missile.

4.11.3.6 ELECTRONIC WARFARE COORDINATION PROCEDURES

EW actions are divided into three types of EW, i.e., ES, EA, and EP. The ES and EA control and coordination procedures are limited to those JUs that perform ES and EA. This does not preclude a unit not possessing organic ES/EA capabilities from controlling and coordinating these actions. The specific protocols and procedures are contained in paragraph 4.5 of this document. Further, the EP activities of these EW participants are also contained in paragraph 4.5.

The EW C² JUs participating on the Surveillance Net PG will follow all of the protocols specified in paragraphs 4.4 and 4.7 of this document.

4.11.3.6.1 ELECTRONIC PROTECTION COORDINATION PROCEDURES WITH NONC² JUS

The EP activities of nonC² JUs are generally preplanned when they are in support of C² JUs. Therefore, coordination of these activities is not required here.

Cases also exist where nonC² JUs must initiate EP activities in a self defensive role. These cases will not require any coordination procedures on the Link 16 interface.

Cases which may require Link 16 support in the conduct of nonC² JU EP activities are TBD, but will likely be disseminated by communications media other than JTIDS/MIDS.

4.12 CONTROL

Control is the near real-time direction of weapons systems and supporting platforms for the accomplishment of assigned missions. The Control function provides the exchange of information between C² JUs and weapon systems/platforms to accomplish Aircraft Control, Surface (Maritime) Control (TBD), Subsurface (Maritime) Control (TBD), Land (Ground) Control (TBD), and EW Control.

From a controlling C² JU's point of view, missile systems are utilized in the same manner as aircraft weapons delivery systems. Obviously, missile systems have limitations that preclude the use of some of the J12 control series messages. However, in the areas of mission assignment, target track correlation, and target sorting, these missile systems are to be viewed exactly as fighter aircraft. Therefore, whenever a nonC² JU appears in the discussion of these areas, it shall be construed to mean both aircraft and missile systems of this type.

4.12.1 AIRCRAFT CONTROL

Aircraft Control is the direction of air units by controlling units. Aircraft Control using Link 16 messages provides the information necessary to direct actions such as air intercepts, vectoring support aircraft, search and rescue (SAR) operations, air traffic control (ATC), controlling remotely piloted vehicles (RPVs), controlling missiles, instrument landings, precision bombing, the aviation portion of ASW, EW support, and final control of CAS missions. Aircraft Control interacts with the Mission Management function and Weapons Coordination and Management function and is supported by the Surveillance function, EW/Intelligence function, Information Management function and PPLI function.

Controlling C² JUs will participate in continuous two-way Link 16 data communications with assigned nonC² JUs. Sensor target information derived locally by nonC² JUs will be made available to the Link 16 network by the controlling C² JU, given the constraints of the tactical situation and sensor target reporting is on. The default for sensor target reporting by nonC² JUs to C² JUs on the Control NPG is on. For nonC² JUs not implementing MADs 37 and 38 default is off. Canceling sensor target reporting by nonC² JUs to C²

JUs on the Control NPG is initiated by the J12.0 (MAD = 38, Sensor Target Reports Off) Mission Assignment message. Situational awareness is provided primarily through J3 Surveillance series, J7 Information Management series, and J10.2 Engagement Status messages. Minimum implementation of messages for Air Control information exchange is provided in Appendix A.

4.12.1.1 AIRCRAFT CONTROL INFORMATION EXCHANGE REQUIREMENTS

The information exchange requirements for support of mission phases of Aircraft Control are contained within the J12 Control series and J13 Platform and System Status series messages.

4.12.1.2 NONCOMMAND AND CONTROL JTIDS/MIDS UNIT CONTROL MESSAGE DESCRIPTIONS

NonC² JU Control messages are described below.

4.12.1.2.1 MISSION ASSIGNMENT MESSAGE

The J12.0 Mission Assignment message is transmitted to assign missions, designate targets, and provide other information. The J12.0I Mission Assignment initial word provides the Mission Assignment discrete and threat warning environment information. The J12.0C1 Target Position continuation word provides position, Index Number, and Strength of the target. The J12.0C2 Target Data continuation word provides additional target information such as Course, Speed, Altitude, and Specific Type. See paragraph 4.12.1.3.17 for the use of the Exercise Indicator in the J12.0C2 continuation word. The J12.0C3 Point Location continuation word provides the point's position, type, number and elevation. The J12.0C4 Surface Attack continuation word provides Target Types, Target Defenses, Run-in/Egress Headings, and stores delivery information. The J12.0C5 Bombing continuation word provides the information necessary to perform beacon bombing. The J12.0C6 Targeting continuation word provides the information necessary for laser targeting or the Related 3 TN or Related IN. The J12.0C7 Third Party continuation word provides information for third party mission assignments and elevation angle of the target.

4.12.1.2.2 VECTOR MESSAGE

The J12.1 Vector message is used by controlling C² JUs to transmit course, speed, and altitude information for aircraft control activities such as ATC, air intercept control (AIC), and navigational assistance. The J12.1E0 Vector extension word provides Time-to-Intercept and R/C information.

4.12.1.2.3 PRECISION AIRCRAFT DIRECTION MESSAGE

The J12.2 Precision Aircraft Direction (PAD) message is used by controlling C² JUs for operations requiring precise control positioning of mission aircraft, e.g., ground-directed release of ordnance, automatic carrier landing operations, ground-directed air cargo delivery, and RPV operations. The J12.2I initial word provides the Addressee TN with vertical and lateral flight path corrections, a Drop Discrete for stores delivery, and an Autopilot Control Bit.

4.12.1.2.4 FLIGHT PATH MESSAGE

The J12.3 Flight Path message is used by controlling C² JUs to provide air units with multiple-leg flight path information. The J12.3I Flight Path initial word provides the Addressee TN with the Sequence Numbers of the waypoints and the time associated with the waypoint. The J12.3E0 Flight Path extension word provides the three-axis geographic position of each transmitted point.

4.12.1.2.5 CONTROLLING UNIT CHANGE MESSAGE

The J12.4 Controlling Unit Change message is used to provide information necessary to initiate control, handover control, or terminate control of a nonC² JU by a C² JU. Control may be initiated by either a C² JU or a nonC² JU. Procedures for all uses of the J12.4 message are provided in paragraph 4.12.1.3.7.

4.12.1.2.6 TARGET/TRACK CORRELATION MESSAGE

The J12.5 Target/Track Correlation message is used by controlling C² JUs to report the correlation/ decorrelation of an index number(s) of a target

report(s) to a specified TN of a surveillance track. Multiple correlations and decorrelations may be reported by use of the J12.5E0/J12.5E1 Target/Track Correlation extension words. The J12.5I Target/Track Correlation initial word provides the Objective TN, Index Originator TN, Index Number assigned by originator, Correlation Indicator, Evaluated Strength, Evaluated Identity, and ID/Strength Indicator. The J12.5E0/J12.5E1 word(s) indicate additional correlations and decorrelations to the same surveillance track by providing six additional sets of Index Originator TNs, Index Numbers, and Correlation Indicators uniquely identified by the letters B through G to allow multiple correlations/decorrelations between Index Numbers and Index Originator TNs to the Objective TN in the J12.5I word. The J12.5 message shall be used by C² JUs to report the correlation/decorrelation of air, land (ground), and surface (maritime) targets. In the event that multiple targets (specified by IN/Index Originator TN combination) are correlated to the same track (Objective TN), it shall not be implied that a given target is correlated to the other targets listed.

4.12.1.2.7 TARGET SORTING MESSAGE

JUs shall use the J12.6 Target Sorting message to accomplish the following tasks:

- a. Enable nonC² JUs to exchange targets and targeting information among themselves.
- b. Pass sensor data to C² JUs and among nonC² JUs.
- c. Pass nonC² JU engagement status information between nonC² JUs and from nonC² JUs to controlling C² JUs.
- d. Control among nonC² JUs.

NonC² JUs originating J12.6 messages will report locally derived data or data derived from data fusion from offboard sources. If any of the fields, except Objective TN, contain data derived from offboard sources, this fact shall be reported in the Fusion Type field. If the Objective TN has been provided in a J12.5 or J12.0 message, the Correlation Indicator field shall be set to value 0. If the Objective TN is established from nonC² onboard correlation

processing, the Correlation Indicator field shall be set to value 1 . The Identity field in the J12.6E0 word shall be changed by operator action only and the default value is 0, Pending.

The J12.6I and J12.6E0 Target Sorting initial and extension words contain basic information on the target and the Status Information Discrete (SID). The J12.6C1 Engagement Status continuation word contains information necessary for addressing and amplification of target data, as well as the capability to set a pointer. The J12.6C2 Fusion Type continuation word is used to provide Sensor and Fusion Type information about the Objective TN or Third Party Index Number and time tag information for the target data. The Time Indicator field in the J12.6C2 word describes how to interpret the Minute, Second, and Hundredths fields. If the Time Indicator field is set to Time of Observation, the Minute, Second, and Hundredths fields represent the time at which the target data was measured. If the Time Indicator field is set to Track Age, the Minute, Second, and Hundredths fields represent the time since the target data was last extrapolated. If the Time Indicator field is set to Time of Extrapolation, the Minute, Second, and Hundredths fields represent the time to which the host platform has extrapolated the target data. Time of Extrapolation does not imply that the platform has lost contact with the target and is "coasting" the target data. The J12.6C3 Kinematic Quality continuation word provides uncertainty information for radar targets, targets that are being derived from sensors other than radar, or in the case of aircraft with Multiple Source Integration (MSI) capabilities, target data derived from multiple onboard sensors. The J12.6C4 Identity/Specific Type Ambiguity continuation word is used to support ID exchange for aircraft with automatic ID correlation techniques. The J12.6C5 Future Event and the J12.6C6 Sensor Management continuation words are used to provide for rapid update of onboard system parameters among sophisticated nonC² JU weapon platforms. Target transmit sequences for nonC² JUs who implement various J12.6 words are provided in the J12.6 T/R rules.

C² JUs may also use the J12.6 Target Sorting message to report updated positional or engagement status data to nonC² JUs. In this case, the message is addressed collectively.

4.12.1.2.8 TARGET BEARING MESSAGE

The J12.7 Target Bearing message provides JUs the capability to pass sensor target information which has been derived from sensors that provide a line-of-sight to the target. Index Numbers are used to report targets in the same manner as in the J12.6 message, from a common pool. When reporting targets derived in this manner, e.g., IR, ES, TV, the reporting JU must establish the target using the J12.7I, J12.7E0, and J12.7E1 words. Origin of angles, angles to the target, and time associated with the target data shall be included as a minimum. If a range estimate for the target is available, then the J12.7C1 word may be transmitted. The J12.7C2 word is used when the identity of the target can be obtained by sensor sources. Angle rates may be transmitted in the J12.7E1 word. Range Rate may be transmitted in the J12.7C1 word. Angle rates and Range Rate contain both observer and target motion along the appropriate axis. Observer rates may be transmitted in the J12.7C1 and J12.7C3 words.

4.12.1.2.9 AIR PLATFORM AND SYSTEM STATUS MESSAGE

The J13.2 Air Platform and System Status message provides the current status of an air platform to include fuel, ordnance status, operational status and on-board systems' status.

4.12.1.2.10 SURFACE (MARITIME) PLATFORM AND SYSTEM STATUS MESSAGE

The J13.3 Surface (Maritime) Platform and System Status message provides the current status of a surface (maritime) platform to include ordnance load, operational status, and on-board systems' status.

4.12.1.2.11 THE SUBSURFACE (MARITIME) PLATFORM AND SYSTEM STATUS MESSAGE

The J13.4 Subsurface (Maritime) Platform and System Status message provides the current status of a subsurface (maritime) platform to include operational status and on-board systems' status.

4.12.1.2.12 LAND (GROUND) PLATFORM AND SYSTEM STATUS MESSAGE

The J13.5 Land (Ground) Platform and System Status message provides the current operational weapons and equipment status of a land (ground) platform.

4.12.1.3 AIRCRAFT CONTROL PROCEDURES AND PROTOCOLS

The procedures and protocols provided for within Aircraft Control are described below.

4.12.1.3.1 MISSION ASSIGNMENT PROCEDURES

Mission assignment procedures are described in the following paragraphs:

a. Mission Assignments. Definitions of specific words and mission assignment word sequences are specified in the J12 series transmit/receive rules found in section 5, part 2. The J12.0 Mission Assignment message shall include sufficient information to establish a track file.

Upon receipt of a J12.0 with the Objective TN set to other than No Statement, the nonC² JU will break all local filters on that Objective TN. The nonC² JU will not respond with a J12.0 message with the R/C field set to value 16, CANTPRO (Objective TN Not Held), until local filters have been broken for 30 seconds (60 seconds for LOB targets). Target report index numbers are correlated/decorrelated to the surveillance track TNs with the J12.5 Target/Track Correlation message as explained in paragraph 4.12.1.2.6.

b. Mission Assignments to Air Targets. Mission assignments that require position data by a C² JU against air targets require a J12.0I/J12.0C1/J12.0C2 word sequence. Mission Type changes may be ordered using the J12.0I word singularly.

c. Air Support Operations (ASO). This procedure spans all types of air-to-surface delivery. The term "surface" is inclusive of both ground and maritime surface environments. This procedure includes, but is not limited to, Air Interdiction (AI), Battlefield Air Interdiction (BAI), Tactical Air (TACAIR) Support for Maritime Operations (TASMO), Close Air Support (CAS), Precision Bombing, Laser Bombing, Suppression of Enemy Air Defenses (SEAD),

Aerial and Armed Reconnaissance, TACAIR Transport and Counter Air Attack missions.

(1) Air Interdiction and Battlefield Air Interdiction. AI and BAI are related activities because targets for both are in the same general category. BAI targets have higher potential for near term effect on friendly forces. Real-time coordination of weapon systems conducting either mission may be accomplished via the interface by exchanging information between JUs to support, execute, and report results.

(2) Tactical Air Support for Maritime Operations. Air operations in support of maritime forces may consist of aerial minelaying, surveillance and reconnaissance, and interdiction of enemy naval surface forces, port facilities, and shipping. Surface situational awareness information is primarily available through the monitoring of J3.0, J3.3, J3.5, and J3.7 messages. J12.6 message information from nonC² JUs may also be utilized. This mission is made up of certain aspects of other ASO activities and is unique largely by the character of its objectives.

(3) Close Air Support. Tactical aircraft performing CAS, deliver ordnance against hostile forces that are in close proximity to friendly ground forces and requires coordination. ASO aircraft are given the location of a contact point from which to operate with an airborne or ground Forward Air Controller (FAC). The J12.4 message may be transmitted to provide the CAS aircraft the necessary information to contact the FAC. Final control to the target shall be provided by voice communication.

(4) Precision Bombing. Precision bombing is performed by aircraft flying a precise delivery course under the direction of a remote, precision guidance/sensor system. The remote system may transmit vector information via the J12.1 message. Precise vectors and drop information may be transmitted in the J12.2 message.

(5) Laser Bombing. Some tactical aircraft employ laser guided munitions. Targets for these munitions must be illuminated by a laser target designator. The J12.1 message may be used to vector the aircraft to the general location of the target/laser designator.

(6) Suppression of Enemy Air Defenses. The purpose of this mission is to neutralize enemy air defenses in a specific area by physical attack or electronic warfare. C² JUs that have the capability to transmit the J14.0 message on the Control NPG may provide near real-time parametric EW data necessary to a nonC² JU for accomplishment of the mission. NonC² JUs on SEAD missions may have capability to receive the J14.0 data to update weapon/EA equipment employment parameters.

(7) Aerial Reconnaissance. The purpose of this mission is to obtain intelligence information by airborne sensors or visual means. The J12.1 message may be used to provide course, speed, and altitude information to the aircrew, as required. The J12.3 message may be used to provide the platform with sequential multiple leg flight path information.

(8) Armed Reconnaissance. This mission differs from Aerial Reconnaissance by intentions to deliver ordnance when targets of opportunity are located.

(9) TACAIR Transport. The purpose of this mission is the carriage of passenger and cargo by means of airborne operations.

(10) Counter Air Attack. The purpose of this mission is to ensure freedom of action for friendly forces and operations by inflicting damage on, or destroying enemy assets on the ground.

d. Mission Assignment Discretes. The following specifies the use of Mission Assignment Discretes (MADs). Continuation words specified are requirements unless described as optional.

(1) No Statement. The J12.0 message with the MAD field set to value 0 is not used.

(2) Refuel. The J12.0 message with the MAD field set to value 1 is used to direct an aircraft to an airborne tanker or other refueling location. Its position is reported in either the J12.0C1 word, or in the J12.0C3 word with the Point Type, 1 field set to value 0, No Statement. The tanker or location shall be assigned a Track Number, reported by Objective TN. If the tanker is airborne or if Objective TN describes an airborne

refueling point, if available, an altitude, course, speed, and specific type information shall be provided in the J12.0C2 word.

(3) Orbit. The J12.0 message with the MAD field set to value 2 is used to direct an aircraft to orbit at a specified track or point that currently is being reported in a J2 or J3 series message. The Objective TN specifies the track or point. Its position is reported in either the J12.0C1 word, or in the J12.0C3 word with the Point Type, 1 field set to value 0, No Statement. If available, the Course and Speed of the Objective TN shall be included in the J12.0 message. If the Altitude is other than No Statement, the aircraft shall orbit at that altitude. If the Altitude is No Statement, the aircraft shall orbit at the nonzero altitude of the track or point, if any, or at pilot discretion.

(4) Recall. The J12.0 message with the MAD field set to value 3 is used to cancel any current mission, except Engage, Priority Kill, Attack, or Clear to Drop, and recall aircraft to a specified location to await further assignment. The recall location need not be assigned a Track Number, but if the location is a moving point, the Objective TN shall be the TN of the point, and it shall be assigned a Course and Speed. This MAD value is not used to direct aircraft to proceed to a specified location to land. The MAD field set to value 4, Return to Base, is used for that purpose.

(5) Return to Base (RTB). The J12.0 message with the MAD field set to value 4 is used to direct aircraft to proceed to a specified base, home base, or other prearranged base to land. The specified base is the Objective TN. Its position is reported in either the J12.0C1 word, or in the J12.0C3 word with the Point Type, 1 field set to value 0, No Statement. Other available amplifying information about the base is reported in the J12.0C2 word. If the Objective TN is No Statement, this MAD value is a general RTB order. In this case, aircraft are ordered to return to an unspecified base or other prearranged base, and only the J12.0I word is transmitted.

(6) Engage. The J12.0 message with the MAD field set to value 5 is used to order the destruction of an air target and provides target data. The J12.0C1 word provides position information and the J12.0C2 word provides other necessary data.

(7) Priority Kill. The J12.0 message with the MAD field set to value 6 is used to order a high priority on the destruction of a specific air target. Target data are also provided in the J12.0C1 and J12.0C2 words.

(8) Break Engagement. The J12.0 message with the MAD field set to value 7 is used to terminate a previous order to destroy an air target.

(9) Investigate/Interrogate. The J12.0 message with the MAD field set to value 8 is used to order an aircraft to investigate or interrogate an air target and provide additional target information. The J12.0C1 and J12.0C2 words provide necessary target data.

(10) Clear to Drop. The J12.0 message with the MAD field set to value 9 is used to provide clearance for aircraft on TACAIR Transport missions to drop stores at a specified location. Objective TN is the target. The J12.0C3 and, optionally, the J12.0C4 or J12.0C5 words provide necessary data. The J12.0C3 word with the Point Type, 1 field set to value 1, Target is used to designate precise drop area positional information. Additionally, the J12.2 message may be used by remote precision systems to accomplish air cargo delivery (see paragraph 4.12.1.2.3).

(11) Cease/Do Not Drop. The J12.0 message with the MAD field set to value 10 is used to order aircraft on TACAIR transport missions to stop dropping stores or not to drop stores at a specified location.

(12) Intervene. The J12.0 message with the MAD field set to value 11 is used to order an aircraft to take action to divert a designated target aircraft from its intended flight path. The target is the Objective TN, and amplifying information about the target is provided in the J12.0C1 and J12.0C2 words.

(13) Divert. The J12.0 message with the MAD field set to value 12 is used to direct an aircraft to cease its current mission and trajectory, except Engage, Priority Kill, Attack, or Clear to Drop, and proceed to a specified location. The location is specified by the Objective TN with amplifying information provided in the J12.0C1 or J12.0C3 words.

(14) Air-to-Surface and Air-to-Air. The J12.0 message with the MAD field set to value 13 or 14 is used to order an aircraft to change its mission to air-to-surface or air-to-air, respectively.

(15) Search and Rescue (SAR). The J12.0 message with the MAD field set to value 15 is used to assign an aircraft to SAR operations. The J12.0C1 word, or J12.0C3 word with Point Type, 1 field set to value 0, No Statement, is used to indicate the location of the search point.

(16) Combat Air Patrol (CAP). The J12.0 message with the MAD field set to value 16 is used to order an aircraft to a CAP mission and provides data on the CAP station. The assigned CAP station is the Objective TN. The position of the CAP station, including altitude, shall be provided in the J12.0C1 and J12.0C2 words. For moving CAP stations, Course and Speed shall also be provided.

(17) Precision Bombing. The J12.0 message with the MAD field set to value 17 is used to order an aircraft to a precision bombing mission and the target location and information is provided by the J12.0C3 and J12.0C4 words. The Point Type, 1 field shall be set to value 1, Target. If more precise location information is available than can be provided in the J12.0C3 word, the J12.0C5 word may be added. Either the Objective TN, or the Index Originator TN and Third Party IN in the J12.0C7 word identify the target. Third party targeting is not to be utilized if the precision bombing is part of a CAS mission.

(18) Laser Designation. The J12.0 message with the MAD field set to value 18 is used to order an aircraft to a laser designation mission and provides target and illuminator code data. The Objective TN, if available, is the TN of the target, not the laser designator. The J12.0C3 word is included to designate the location of the target with Point Type, 1 field set value 1, Target. The J12.0C4 word may be utilized for target information. The J12.0C6 word provides the Laser Illuminator Code information to the aircraft. Either the Objective TN, or Index Originator TN and Third Party IN in the J12.0C7 word identify the target. If the position of the laser designator is known, a subsequent J12.0 message with the MAD field set to value 43, Related Mission Data, the Point Type, 1 field set to

value 6, Laser Designator, and the Objective TN set to the TN of the laser designator may be transmitted.

(19) Beacon Bombing. The J12.0 message with the MAD field set to value 19 is used to order an aircraft to a beacon bombing mission and provide necessary targeting data. The J12.0C3 word with Point Type, 1 field set to value 4, Beacon, depicts the location of the Objective TN, which is the beacon, not the target. The location of the target is provided by the setting of the J12.0C5 Target Range and Target Bearing fields, which report data relative to the beacon location. Additional data is provided in the J12.0C4 and J12.0C5 words, including Delta Elevation and Beacon Code.

(20) Close Air Support (CAS). The J12.0 message with the MAD field set to value 20 is used to order an aircraft to a CAS mission and provides data needed for accomplishment of the mission. The Objective TN, if available, is the TN of the target. The J12.0C3 word is included to designate the location of the target. If the target is unknown, the Objective TN field and the J12.0C3 Latitude and Longitude fields shall be set to No Statement. The J12.0C4 word may be utilized for target information. A subsequent J12.0 message to specify the contact point and contact point location is transmitted in a J12.0I/J12.0C3/J12.0C6 word sequence with the MAD field set to value 43, Related Mission Data, the Point Type, 1 field set to value 5, Contact Point, and the Objective TN field set to the TN of the contact point.

(21) Interdiction. The J12.0 message with the MAD field set to value 21 is used to order an aircraft to an AI/BAI mission and provides target data. The J12.0C3 with the Point Type, 1 field set to value 1, Target, and the J12.0C4 word provide target location and information. If more precise location information is available than can be provided in the J12.0C3 word, the J12.0C5 word may be transmitted.

(22) Aerial Reconnaissance. The J12.0 message with the MAD field set to value 22 is used to order an aircraft to an Aerial Reconnaissance mission and provides data on the target. The Objective TN is the TN of the reconnaissance point. The J12.0C1 word, or J12.0C3 word with the Point Type, 1 field set to value 8, Point; value 9, Center Point; or

value 10, Initial Route Point, is included to designate the location of the reconnaissance point.

(23) Escort. The J12.0 message with the MAD field set to value 23 is used to order an aircraft to escort another aircraft or flight. The aircraft or flight to be escorted is the Objective TN. The current position of the Objective TN shall be reported in either the J12.0C1 word or J12.0C3 word with the Point Type, 1 field set to value 0, No Statement. Available amplifying data shall be transmitted in the J12.0C2 word.

(24) Shadow. The J12.0 message with the MAD field set to value 24 is used to order an aircraft to maintain surveillance on a designated airborne target. The target is the Objective TN. Amplifying information about the target is reported in the J12.0C1 and J12.0C2 words.

(25) Weapons Free and Weapons Tight. The J12.0 message with the MAD field set to value 25 or 26 is used to transmit a Weapons Free or Weapons Tight condition, respectively, to controlled nonC² JUs.

(26) Salvo/Clear Aircraft. The J12.0 message with the MAD field set to value 27 is used to order aircraft to depart from or avoid a specified location. The location is specified as either a track or point reported in the J12.0C3 word with Point Type, 1 field set to value 0, No Statement, or J12.0C1 word for other than ASO missions. The direction the aircraft is to proceed away from the track or point cannot be specified with this MAD value. If the direction is to be transmitted, a J12.1 Vector message with the Vector Discrete field set to value 12, Bug-out Heading, shall be transmitted.

(27) Alert Conditions White, Yellow, and Red. The J12.0 message with the MAD field set to value 28, 29, or 30 is used to broadcast these warning signals which represent progressive conditions of real or threatened danger to friendly forces. The definitions of these terms are contained in operational doctrine. These MAD values shall only be addressed to the collective address 00177 (octal). These messages are used to broadcast general warning conditions with the Objective TN set to No Statement.

(28) Cover. The J12.0 message with the MAD field set to value 31 is used to order an aircraft to maintain a position relative to a

designated air target, the Objective TN, from which a successful intercept can take effect if needed. The position and amplifying information reported in the J12.0C1 and J12.0C2 words relate to the target, not the relative position to be maintained. If specific relative position is to be maintained, then it is necessary to provide that information by other means, e.g., J12.1 Vector message or voice.

(29) Visual Identification. The J12.0 message with the MAD field set to value 32 is used to order a nonC² JU to visually identify the target designated as the Objective TN. The position of the target shall be transmitted in the J12.0C1 word or, if the Addressee TN is an ASO nonC² JU, in a J12.0C3 word with the Point Type, 1 field set to value 1, Target. Amplifying data shall be transmitted in the J12.0C2 word; if the Addressee TN is an ASO nonC² JU, the J12.0C5 and J12.0C7 words may be added if required.

(30) Go To Voice. The J12.0 message with the MAD field set to value 34 is used to order a nonC² JU to establish communications on the C² JU's JTIDS/MIDS Voice Channel as reported in PPLI messages or other prebriefed voice channel for C² JU control or additional information. Only the J12.0I word will be transmitted and the Objective TN will be set to No Statement. The Addressee TN may be set to a specific TN or the collective address, TN 00177 (octal).

(31) High Interest Track Designation. The J12.0 message with the MAD field set to value 35 is used to send initial track data and order nonC² JUs to establish and maintain track data on selected high interest tracks designated as the Objective TN. The Addressee TN may be set to a specific TN or the collective address, TN 00177 (octal). NonC² JUs shall monitor the Surveillance NPG for track updates.

The high interest track designation overrides the normal or currently selected host data and display filters designed into the nonC² JU. This capability shall be restricted to those special cases where the C² JU must be certain the nonC² JU accepts and displays the track data. Because the value is nonspecific as to the nature of the "High Interest", voice amplification is expected to follow the message. The C² JU shall transmit the J12.0 message with the MAD field set to value 36, Cancel High Interest Track Designation,

as soon as the high interest nature of the track no longer exists. Reception of a J7.0 Drop Track message shall also cancel a high interest track.

(32) Cancel High Interest Track Designation. The J12.0 message with the MAD field set to value 36 is used to order nonC² JUs to cancel the high interest track designation of the Objective TN. This cancellation permits nonC² JUs to purge the Objective TN from their databases. The Addressee TN may be set to a specific TN or the collective address, TN 00177 (octal).

(33) Sensor Target Reports On. The J12.0 message with the MAD field set to value 37 is used to order a nonC² JU to report on the Control NPG all air targets that it derives locally. This MAD value is also used to restore Addressee TN sensor target reporting after it has been ordered by a J12.0 message with the MAD field set to value 38 to cease reporting.

(34) Sensor Target Reports Off. The J12.0 message with the MAD field set to value 38 is used to order a nonC² JU to cease Control NPG reporting of all air targets it derives locally. Receipt of this MAD value shall not inhibit nonC² JU engagement status reporting.

(35) Suppression of Enemy Air Defenses (SEAD). The J12.0 message with the MAD field set to value 39 is used to order an aircraft to a SEAD mission and provide initial target data. The J12.0C1, J12.0C3 with the Point Type, 1 field set to value 1, Target, or value 9, Center Point, J12.0C5 and J12.0C7 words provide specific target information, and the J12.0C3 word contains basic location information. A J12.0C5 word may be included if precision location information is available, and the J14.0 message may be sent to provide EW parametric data, if appropriate.

(36) Armed Reconnaissance. The J12.0 message with the MAD field set to value 40 is used to assign an ASO aircraft to an Armed Reconnaissance mission and provide target location information. The J12.0C3 with Point Type, 1 field set to value 8, Point, 9, Center Point, or 10, Initial Route Point, and optionally, the J12.0C5 and J12.0C7 words provide necessary data.

(37) Attack. The J12.0 message with the MAD field set to value 41 is used in two distinct ways:

(a) As a final execution authority for a previously assigned MAD, i.e., 17, Precision Bombing; 18, Laser Designation; 19, Beacon Bombing; 21, Interdiction; 39, Suppression of Enemy Air Defenses; 40, Armed Reconnaissance; and 44, Counter Air Attack; or, for a prebriefed mission for which a MAD has not been previously issued. This is used only if final execution authority is required by the Rules of Engagement. The absence of detailed target data in the J12.0 MAD value 41, Attack message for the same Objective TN as a previous MAD shall not cause the purging of that data associated with the previous MAD.

(b) For ASO missions other than CAS, to assign a new target, with immediate authority to complete the mission. In this use, the MAD is not preceded by another MAD value for the same Objective TN.

(38) Cease Attack. The J12.0 message with the MAD field set to value 42 is used to order an ASO aircraft to cease attacking the target specified by the Objective TN. This MAD value only cancels Attack MADs against specific targets, and not other mission assignments.

(39) Related Mission Data. The J12.0 message with the MAD field set to value 43 provides an ASO aircraft with data on a point or laser designator which is related to a target. After transmitting an initial J12.0 message with the MAD field set to value 9, 17, 18, 20, 21, 32, 39, 40, 41, or 44, additional J12.0I/J12.0C1/J12.0C3/J12.0C6 or J12.0I/J12.0C3/J12.0C6 word sequences with the MAD field set to value 43 may be transmitted. The Objective TN in the J12.0I word or the IN in the J12.0C1 word is the TN or IN of the related point or laser designator, the Latitude and Longitude in the J12.0C3 word is the position of the Objective TN or IN, and the Point Type, 1 field shall be set to a value other than 1, Target, or 15, Origin of Bearing. The Related 3 TN or Related IN field shall be set to the TN or IN of the target which was transmitted in the previous J12.0 message.

(40) Counter Air Attack. The J12.0 message with the MAD field set to value 44 is used to order an aircraft to a Counter Air Attack mission. The J12.0C3 with Point Type, 1 field set to value 1, Target, and the J12.0C4 word provide target location and information. The J12.0C5 word is optional.

(41) Fighter Sweep. The J12.0 message with the MAD field set to value 45 is used to order an aircraft on a Fighter Sweep mission. No target data is provided, as the mission is designed to seek out and destroy enemy targets of opportunity in the air.

(42) Cease Fire. The J12.0 message with the MAD field set to value 46 is used to order a nonC² JU SAM site not to fire against the target defined in the message. If firing has occurred, missiles in flight continue to intercept targets.

(43) Hold Fire. The J12.0 message with the MAD field set to value 47 is an emergency order used to order a nonC² JU SAM site not to fire against the target defined in the message. If firing has occurred, missiles in flight must be destroyed.

(44) Cease Mission. The J12.0 message with the MAD field set to value 63 is used to order a nonC² JU to clear any previous order against a specific target except for Engage, Priority Kill, Clear to Drop, or Attack, MAD value 5, 6, 9, or 41. These are to be cleared by setting the MAD field to value 7, Break Engagement (to cancel an Engage or Priority Kill assignment), 10, Cease/Do Not Drop (to cancel a Clear to Drop assignment), or 42, Cease Attack (to cancel an Attack assignment).

e. Index Numbers in Mission Assignment Messages. C² JUs transmitting J12.0 messages shall always set the Index Number field to No Statement. Units receiving a J12.0 with the Index Number set to No Statement shall not interpret the Origin of Index Number field.

NonC² JUs transmitting J12.0 assignments may set the Index Number and Origin of Index Number fields to other than their default values.

Assignments issued by nonC² JUs on nonC² JU sensor ASO targets are accomplished by transmitting the Index Number in the J12.0C1 word for engagements on targets reported by either the transmitting or receiving unit, or the Third Party IN in the J12.0C7 word for third party assignments. The following types of assignments may be issued:

(1) A first party assignment occurs when the nonC² JU receiving the order has derived the target via onboard local sensors and is reporting the target. The Origin of Index Number field is set to value 1 and the Index Number field is set to the receiver's target Index Number. Target data, e.g., Latitude, Longitude, Course, Speed, shall not be included.

(2) A second party assignment occurs when the nonC² JU transmitting the order has derived the target via onboard local sensors and is reporting the target. The Origin of Index Number field is set to value 0, and the Index Number field is set to the originator's target Index Number. All available target data shall be included.

(3) A third party assignment occurs when neither the nonC² JU transmitting the order, nor the addressed nonC² JU hold the target on local sensors. The target information is provided by a third party nonC² JU. In this case, the Origin of Index Number field is set to value 0, the Index Number field is set to No Statement, the J12.0C7 word Index Originator TN field is set to the third party nonC² JU, and the J12.0C7 word Third Party IN field is set to the third party's target Index Number. All available target data shall be included. Third party assignments will not be used for CAS.

f. Situational Awareness. All nonC² JUs performing the ASO mission are required to monitor the Surveillance NPG for situational awareness. Also, nonC² JUs may monitor the NonC² JU-to-NonC² JU NPG to aid surface/ground situational awareness. As a minimum, the J3.0 Reference Point, J3.2 Air Track, J3.3 Surface (Maritime) Track, and J3.5 Land (Ground) Point/Track messages must be received and processed to provide surface and enemy and friendly force information, target descriptions, and locations. The J3.7 EW Product Information message and the J14.0 Parametric Information message may be received by nonC² JUs with SEAD mission capability. NonC² JUs may also utilize J12.6 Target Sorting message reports specifying nonC² JU derived target data. NonC² JUs conducting ASO shall receive lines and areas for situational awareness and update information primarily from the Surveillance NPG. NonC² JUs shall monitor J7.0 Track Management and J10.2 Engagement Status messages for amplification of the surveillance data.

g. Ordering Mission Assignments. The initial J12.0 message is used by a controlling C² JU to order air-to-air, air-to-surface, and general mission

assignments. Additionally, a nonC² JU conducting ASO missions may use J12.0 messages for inter- and intra-flight orders as described in paragraph 4.12.1.3.1.2n below. The R/C field on original orders shall be set as shown in table J12-2. The Objective TN field shall be set as follows:

(1) C² JUs originating J12.0 messages for MAD values 1, 2, 5, 6, 7, 8, 11, 12, 16, 17, 18, 19, 21, 22, 23, 24, 31, 32, 35, 36, 39, 40, 41, 42, 43, 44, and 63 shall set the Objective TN field to the TN of the target or entity which is the object of the assignment.

(2) C² JUs originating J12.0 messages for MAD values 3, 4, 9, 10, 15, 20, 25, 26, and 27 shall either set the Objective TN field to No Statement where the assignment does not relate to a target/entity or shall set the Objective TN field as in paragraph 4.12.1.3.1g(1) above.

(3) C² JUs originating J12.0 messages for MAD values 13, 14, 28, 29, 30, 34, 37, 38, and 45 shall set the Objective TN field to No Statement.

(4) To avoid TN accountability problems, the J12.0 message shall not be used to originate the Objective TN, i.e., the Objective TN shall have been reported on the Surveillance NPG.

(5) NonC² JUs originating J12.0 messages shall set the Objective TN field to the TN of the target/entity which is the subject of the mission assignment or, where no Objective TN is available, shall set either the IN or Third Party IN field to the IN of the target/entity. Where no TN or IN is currently being reported for the target/entity, the nonC² JU shall allocate its next available IN for the J12.0 message.

Mission assignments against targets defined by a line of bearing may be accomplished by transmitting a J12.0I/J12.0C1/J12.0C3/J12.0C5 word sequence. The J12.0C7 word may be added if elevation angle data is available. The J12.0C3 word Point Type, 1 field shall be set to value 15, Origin of Bearing.

h. Target Location. ASO missions are supported by location information broadcast in J3.0, J3.3, J3.5, and J3.7 Surveillance messages, J12.6 Target Sorting messages, and in a J12.0 Mission Assignment message. The J3 Surveillance information on a target is originated by any C² JU with R² for

a point or track and is the primary source of situational awareness data for nonC² JUs. The J12.0C3 word with Point Type, 1 field set to value 1 and, optionally, the J12.0C1, J12.0C2, and J12.0C5 words include target data in a J12.0 message with the MAD field set to values 9, 17, 18, 19, 20, 21, 22, 39, 40, 41, or 44. The J12.0C5 word contains additional fields that may be used to expand the Latitude, Longitude, and Elevation fields to provide granularities of approximately 4 feet in all three dimensions. When the J12.0C5 word is included for purposes of increasing precision of location information, all other fields in that word will be set to No Statement. The J12.0C5 word shall not be transmitted if a J12.0C2 word indicates the target is moving, i.e., the Course and Speed fields are other than No Statement.

i. Target Description. The J12.0C4 word Target Type field provides the capability for JUs to pass general target categories to nonC² JUs on ASO missions. More specific target descriptions may be provided by use of the J12.0C1 and J12.0C2 word combination with the Env/Cat and Specific Type fields set appropriately. Additionally, the J12.0C2 word may be used to provide Course, Speed, and Exercise Indicator information if deemed appropriate.

j. Related Mission Information. Mission information related to the target is provided by setting the J12.0C3 word Point Type, 1 field to values other than 1 or 15 in a J12.0I/J12.0C3 word sequence. Multi-leg flight path information is provided in J12.3 messages. Up to 15 waypoints may be transmitted in separate J12.3 messages to update a preloaded route or as an original flight path assignment. A detailed explanation of J12.3 Flight Path message information is provided in the T/R rules. In some scenarios, J12.1 messages may be sent to provide vectors in lieu of J12.3 Flight Path message information. The J12.0C4 word provides specific targeting data to include Target Type, Run In, and Egress Headings, Number and Type of Stores, and Time information. The J12.0C4 word Time Discrete, Hour, and Minute fields are used to assign Time on Target and Initial Point Time to a nonC² JU. If a JU desires to change an assigned Time on Target, a J12.0I/J12.0C4 message sequence shall be sent once with Time Discrete set to value 4, Changed Time on Target. Receiving platforms should then update the Time on Target for the mission. Subsequent J12.0C4 words will reflect the updated time by setting the Time Discrete field to value 1, Time on Target, and the Hour and Minute fields appropriately.

k. Target Defenses. Target defense information is primarily available to nonC² JUs by monitoring the J3 series messages. Additionally, a controlling JU may provide information in a J12.0 message with the MAD field set to value 9, 17, 18, 19, 20, 21, 32, 39, 41, 43, or 44, by setting a value other than No Statement in the J12.0C4 Target Defenses field. Location of these defenses is provided by use of the Latitude and Longitude fields in a J12.0C3 word transmitted in a J12.0 message with the MAD field set to value 43 and the Point Type, 1 field set to value 11, Target Defenses.

l. Weather. Controlling C² JUs or nonC² JUs may broadcast weather in the target area using the J17.0 Weather Over Target message on the Control NPG in which the affected ASO aircraft is operating. The Objective TN is the target previously assigned in the J12.0 message. The Origin of Index Number and Index Number fields provide the capability for a nonC² JU to originate this message. Visibility, wind direction and strength, cloud cover and height, altimeter setting, and time of observation may be provided if data are available.

m. NonC² JU Status. JUs may monitor the status of nonC² JU ASO missions by receiving J2.2 Air PPLI and J13.2 Air Platform and System Status messages. The J2.2 message provides the interface with real-time status through the Airborne Indicator, Exercise Indicator, Mission Commander Indicator, Flight Leader Indicator, and Mission Correlator fields. Additionally, the Latitude and Longitude fields in the J2.2E0 word, and the Air Platform Activity and Mode III Code fields in the J2.2C1 word provide mission tracking information. The J13.2 message provides real-time data on ordnance load, fuel, operational status, and on board systems status. The J13.2I word Time Report Function, Minute, and Hour fields are used to provide real-time updates to the expected time on target. If the Mission Commander Indicator or the Flight Leader Indicator field in the J2.2I word is set to value 1, the Aircraft Operational Capability field in the J13.2I applies to the entire mission group or flight. Elements of a group or flight with a common mission may be identified by utilization of the J2.2 Mission Correlator field. Definition of specific values within the Mission Correlator field is determined by the operational commander (see paragraph 4.10.1.1).

n. NonC² JU to NonC² JU Communication. NonC² JUs on ASO missions shall have the capability to simultaneously operate on the Control and NonC² JU-to-NonC² JU NPGs. They may have the capability to assign missions to other aircraft by transmitting J12.0 messages with the MAD field set to value 3, 4, 9, 10, 13 through 22, 32, 34, 39 through 45, and 63 on the NonC² JU-to-NonC² JU NPG. Protocols for transmission of the J12.0 message by a nonC² JU are described in paragraphs 4.12.1.3.1c, d, and e above.

o. Reporting Mission Results. NonC² JUs shall have the capability to provide the controlling C² JU ASO mission results by utilizing the J12.6 message. NonC² JUs shall transmit the J12.6 message with the SID field set to value 6, Track/Target Destroyed, 7, Disengaging, 8, Target Partially Destroyed, 11, Battle Damage Assessment Unknown, or 12, Recommend Reattack. When the nonC² JU sets either the Mission Commander Indicator or Flight Leader Indicator field in the J2.2I word to value 1, the results may be reported for the entire mission group or flight. The C² JU will transmit the equivalent J10.2 WES message upon receipt of the J12.6 message ASO mission results from a nonC² JU.

p. Processing J12.0 Data Fields when Objective TN Already Held. All applicable J12.0 data held by the C² JU shall be transmitted in the J12.0 message as required, regardless of whether the Objective TN has been transmitted separately in a J3 Surveillance message.

q. Multiple Mission Assignments. On receipt of a Mission Assignment a nonC² JU shall interpret the order as an immediate order. Mission Assignments are divided into two distinct categories; those that initiate or cancel the release of weapons against a target (Attack missions: e.g. Priority Kill or Engage), and those that do not initiate the release of weapons (non-Attack missions). The Attack missions take precedence over the latter. NonC² JUs may undertake multiple Attack Mission Assignments, but shall undertake only one non-Attack Mission Assignment at a time (and not simultaneously with an Attack Mission Assignment). Non-Attack Mission Assignments may be 'stacked' by a C² JU for transmission to a nonC² JU; a nonC² JU accepting a non-Attack Mission Assignment shall cancel any previous non-Attack Mission Assignment which it was undertaking. Prior to assigning a non-Attack Mission Assignment, a C² JU shall first cancel any current Attack Mission Assignment.

r. Platform Activity Resulting From Mission Assignment. Selected Platform Activity values reported by a nonC² JU shall correspond to the mission functions and activities it performs. If a nonC² JU chooses to report a value other than the No Statement value in the Platform Activity field of the J2.2 PPLI message, it shall also implement value 127, Reset to No Statement. If a nonzero value, including the Reset to No Statement value, has been transmitted previously, either a new value other than zero or 127, Reset to No Statement, must be transmitted. A nonC² JU that implements nonzero Platform Activity field values shall set an applicable Platform Activity value in its PPLI message that corresponds to the J12.0 MAD when the controlled unit starts performing the assigned action.

Table 4.12-1 depicts the applicable J12.0 MAD to J2.2 Platform Activity relationships. The table requirements are applicable only when read from left to right and present required implementation only for those nonC² JUs implementing nonzero values of the J2.2 Platform Activity field. For example, if a nonC² JU elects to implement for reception the J12.0 MAD value 1, Refuel, it shall report in its J2.2 Platform Activity field value 29, Refueling/Tanking. If a nonC² JU elects to receive J12.0 MAD value 5, Engage, the reported Platform Activity can be any one of the listed values.

MIL-STD-6016B

TABLE 4.12-1. J2.2 Platform Activity to be Transmitted after
Transmitting a J12.0 WILCO (Sheet 1 of 4)

J12.0 MAD/WILCO	J2.2 Platform Activity ¹ (NonC ² JU)
1 - Refuel	29 - Refueling/Tanking
2 - Orbit	58 - Orbiting
3 - Recall	11 - Transiting 59 - Under Recall
4 - Return to Base	52 - Return to Base
5 - Engage	2 - Over the Horizon Targeting 12 - Special Weapons Attack 13 - Intruding 22 - Interception 25 - Conventional Attack 31 - Combat Air Patrol 49 - Antiair Warfare 51 - Counter-Air Warfare 60 - Engaging
6 - Priority Kill	2 - Over the Horizon Targeting 12 - Special Weapons Attack 13 - Intruding 22 - Interception 25 - Conventional Attack 31 - Combat Air Patrol 49 - Antiair Warfare 51 - Counter-Air Warfare 61 - Engaging (Priority Kill)
7 - Break Engagement	See Note 2.
8 - Investigate/Interrogate	22 - Interception 31 - Combat Air Patrol 62 - Investigating

MIL-STD-6016B

TABLE 4.12-1. J2.2 Platform Activity to be Transmitted after
Transmitting a J12.0 WILCO (Sheet 2 of 4)

J12.0 MAD/WILCO	J2.2 Platform Activity ¹ (NonC ² JU)
9 - Clear To Drop	4 - Logistics Support 17 - Airlift (Transport) 47 - Trooplift
10 - Cease/Do Not Drop	See Note 2.
11 - Intervene	19 - Shadowing/Intervening 31 - Combat Air Patrol 64 - Intervening
12 - Divert	11 - Transiting 65 - Diverting
13 - Air-to-Surface	5 - Antisurface Warfare 18 - Antisubmarine Warfare 21 - Air Assault 30 - Interdiction 35 - Close Air Support 37 - Ground Attack Tactics 43 - Strike Warfare 66 - Air-to-Ground
14 - Air-to-Air	22 - Interception 31 - Combat Air Patrol 49 - Antiair Warfare 51 - Counter-Air Warfare 67 - Air-to-Air
15 - Search and Rescue	8 - Search and Rescue
16 - Combat Air Patrol	31 - Combat Air Patrol 39 - Rescue Combat Air Patrol 40 - Surface Combat Air Patrol

MIL-STD-6016B

TABLE 4.12-1. J2.2 Platform Activity to be Transmitted after
Transmitting a J12.0 WILCO (Sheet 3 of 4)

J12.0 MAD/WILCO	J2.2 Platform Activity ¹ (NonC ² JU)
17 - Precision Bombing	25 - Conventional Attack 30 - Interdiction 35 - Close Air Support 37 - Ground Attack Tactics 43 - Strike Warfare 68 - Precision Bombing
18 - Laser Designation	25 - Conventional Attack 30 - Interdiction 35 - Close Air Support 37 - Ground Attack Tactics 43 - Strike Warfare 69 - Laser Designation
19 - Beacon Bombing	25 - Conventional Attack 30 - Interdiction 35 - Close Air Support 37 - Ground Attack Tactics 43 - Strike Warfare 70 - Beacon Bombing
20 - Close Air Support	35 - Close Air Support
21 - Interdiction	30 - Interdiction
22 - Aerial Reconnaissance	1 - Reconnaissance
23 - Escort	9 - Escorting
24 - Shadowing	19 - Shadowing/Intervening 31 - Combat Air Patrol 71 - Shadowing
25 - Weapons Free	N/A
26 - Weapons Tight	N/A
27 - Salvo/Clear Aircraft	N/A
28 - Alert Condition White	N/A
29 - Alert Condition Yellow	N/A
30 - Alert Condition Red	N/A

MIL-STD-6016B

TABLE 4.12-1. J2.2 Platform Activity to be Transmitted after Transmitting a J12.0 WILCO (Sheet 4 of 4)

J12.0 MAD/WILCO	J2.2 Platform Activity ¹ (NonC ² JU)
31 - Cover	22 - Interception 31 - Combat Air Patrol 72 - Covering
32 - Visual Identification	22 - Interception 31 - Combat Air Patrol 73 - Visual Identification
34 - Go To Voice	N/A
35 - High Interest Track Designation	N/A
36 - Cancel High Interest Track Designation	N/A
37 - Sensor Target Report On	N/A
38 - Sensor Target Report Off	N/A
39 - Suppression of Enemy Air Defenses	5 - Antisurface Warfare 25 - Conventional Attack 37 - Ground Attack Tactics 43 - Strike Warfare 66 - Air-to-Ground
40 - Armed Reconnaissance	5 - Antisurface Warfare 18 - Antisubmarine Warfare 21 - Air Assault 25 - Conventional Attack 30 - Interdiction 35 - Close Air Support 37 - Ground Attack Tactics 43 - Strike Warfare 66 - Air-to-Ground
41 - Attack	5 - Antisurface Warfare 18 - Antisubmarine Warfare 21 - Air Assault 25 - Conventional Attack 30 - Interdiction 35 - Close Air Support 37 - Ground Attack Tactics 43 - Strike Warfare 66 - Air-to-Ground
42 - Cease Attack	See Note 2.
43 - Related Mission Data	N/A
44 - Counter Air Attack	30 - Interdiction 43 - Strike Warfare 51 - Counter-Air Warfare 66 - Air-to-Ground
45 - Fighter Sweep	22 - Interception 49 - Antiair Warfare 51 - Counter-Air Warfare 67 - Air-to-Air
63 - Cease Mission	N/A

Notes:

1. The value 0, No Statement, may be substituted for any value of Platform Activity. If a nonzero value had previously been transmitted, either a new value (other than 0) or 127, Reset to No Statement, must be transmitted.
2. Acceptance of Break Engagement, Cease/Do Not Drop, or Cease Attack does not necessarily constitute a change in Platform Activity.

s. Status Information Discretes Resulting from Mission Assignment. After transmitting a WILCO for a received J12.0 MAD, a nonC² JU shall report execution of the MAD by transmitting corresponding J12.6 SID values in addition to the requirements for transmitting J2.2 Platform Activity values.

t. Reception of Mission Assignment Messages by Subordinate NonC² JUs. In order to support operation of nonC² JUs as a flight of aircraft controlled as a single entity by the controlling C² JU or, for ASO missions, the nonC² Mission Commander, J12.0 messages addressed to the designated Flight Leader may be received and displayed by all flight members. In addition, responses to those messages may also be received and displayed. Only the addressed unit (Flight Leader) shall make the appropriate Receipt/Compliance responses.

4.12.1.3.2 TARGET/TRACK CORRELATION PROCEDURES

Controlling C² JUs shall perform correlation/decorrelation procedures on Index Numbers assigned to reported sensor targets and TNs assigned to Surveillance tracks. Correlated target/track data such as ID, etc., may be used to update databases and displays. C² JUs originating the J12.6 message must have previously assigned or associated a Surveillance TN with the target. Several nonC² JUs may hold sensor contact on the same target and already have assigned an Index Number to the target. All of these Index Numbers may be correlated to the target by the C² JU. The C² JU shall not concurrently correlate the same TN to more than one index number of a target from the same nonC² JU. All the above correlations shall be reported on the Control Network PG using the J12.5 message.

Multiple TNs shall not be correlated to a single IN/Index Originator TN combination by using multiple J12.5 messages. If a new correlation message is received that is in conflict with a previous correlation message, the receiving JU shall break the previous correlation and accept the new correlation defined in the new correlation message.

4.12.1.3.3 TARGET SORTING PROCEDURES

Target reports are transmitted by nonC² JUs to indicate a sensor contact or engagement status at a given position. Target sorting consists of five related areas that are discussed separately for clarity. These areas are,

Index Number Usage; Acquiring, Updating, and Canceling Targets; Engagements; Pointers; and Mark Points/Points of Interest.

a. Index Number Usage. Index Numbers provide a means for nonC² JUs to distinguish individual sensor contacts. Index Numbers are an unmanaged block of 63 numbers, 1 through 77 octal, assigned by the originating nonC² JU. The Origin of Index Number field specifies whether the message originator or the message addressee assigned the Index Number. NonC² JUs are responsible for the management of their own Index Numbers and associated target data. New Index Numbers are established independent of the J12.6 SID field value. Index Numbers are canceled by use of the J12.6 message with the SID field set to value 5, Cancel Sensor Target Report. Index Numbers are assigned in sequential order and not repeated until all numbers have been used.

The J12.6 message may contain the Index Number, the Objective TN, neither, or both depending upon the data available.

b. Acquiring, Updating, and Canceling Targets. NonC² JUs report sensor target data on the NonC² JU-to-NonC² JU NPG using the appropriate SID field value and word sequences specified in section 5 part 2, Tables J12-4.1 through J12-4.6. NonC² JUs shall also have the capability to report selected sensor target data on the Control NPG. When nonC² JUs are transmitting their sensor target data on the Control NPG, the controlling C² JU shall monitor the nonC² JU originated sensor targets transmitted in J12.6 messages on the Control NPG to determine if an existing surveillance track correlates to a sensor target (see paragraph 4.12.1.3.2). If the sensor target meets the correlation criteria, a J12.5 message shall be transmitted on the same Control NPG as the J12.6 message was received. The Evaluated Identity and Evaluated Strength fields, if implemented, of the J12.5 message shall be set to the same values as locally held for the Identity and Strength of the surveillance track, and the ID/Strength Indicator field shall be set to value 2. If the sensor target fails to meet the correlation criteria and the presence of a new track is indicated, the C²JU shall originate a J3 series message with a Track Quality as specified in Table 4.12-2, with the C²JU as Source TN on the Surveillance NPG, and a J12.5 message on the Control NPG. The Evaluated Identity and Evaluated Strength fields, if implemented, of the J12.5 message shall be set to the same values as reported in the Identity and

Strength fields of the received J12.6 message, and the ID/Strength Indicator shall be set to value 1.

Table 4.12-2. TPQ to TQ Translation

<u>TPQ</u>	<u>NOTES</u>	<u>TQ</u>
0	No Statement	6
1	< or = 4.4 Square Data Miles	8
2	< or = 1.10 Square Data Miles	9
3	< or = 0.0281 Square Data Miles	10

When the J12.6 message is used to report the acquisition or updating of a radar target or when sensors other than radar or combined with radar determine there is a 95 percent probability that the target is within a 4.4 square data mile area, the Latitude and Longitude fields in the J12.6I word shall be used to report the location of the Objective TN, i.e., target. If radar accuracy is known to be worse than 4.4 square data miles, the Target Position Quality field shall be set to No Statement.

The J12.7 message is used to report a target derived exclusively by sources other than radar, i.e., alternate sensor(s), and there is not a 95 percent probability that the target is within a 4.4 square data mile area.

NonC² JUs shall update all sensor targets on a periodic basis by transmitting the J12.6 and/or J12.7 messages as specified in the T/R rules.

When a nonC² JU loses sensor contact it shall transmit a J12.6 message with the SID field set to value 5, Cancel Sensor Target Report. Since C² JUs use J12.6 sensor reports as an integrated sensor report, receipt of a Cancel Sensor Target Report shall be processed in the same manner as a lost radar report.

c. Engagements. Engagements of sensor targets/surveillance tracks may be ordered by controlling C² JUs, independently initiated by a nonC² JU, or directed by another nonC² JU.

(1) Engagements ordered by controlling C² JUs are explained in paragraph 4.12.1.3.1.

(2) NonC² JUs may have the capability to order or direct engagements among themselves. ENV/CAT = 2, Air SID values 13, Investigate, 14, Engage, or 15, Disengage, are used for this purpose. The J12.6 message shall contain either the Objective TN, an Index Number, or both if the data are available. If a correlation between Index Number and Track Number has been reported, the Objective TN must be included.

There are four types of engagements that may be prosecuted through the use of a J12.6 message with the ENV/CAT = 2, Air SID field set to value 13, 14, or 15. They are distinguished by whether nonC² JUs are sending the J12.6 message, receiving the J12.6 message, providing radar illumination of the target, or using a surveillance report.

(a) A first party engagement occurs when the nonC² JU receiving the order has derived the subject of the engagement via onboard local sensors and is reporting the target via the link. For a first party engagement, the Origin of Index Number field is set to value 1 and the Index Number field is set to the receiver's target index number. Target data, e.g., Latitude, Longitude, Course, Speed, etc., shall not be included.

(b) A second party engagement occurs when the nonC² JU that is sending the order has derived the subject of the engagement via onboard local sensors and is reporting the target via the link. For a second party engagement, the Origin of Index Number field is set to value 0, and the Index Number field is set to the sender's target index number. All available target data shall be included.

(c) A third party engagement occurs when neither the nonC² JU sending the order, nor the nonC² JU receiving the order holds the target on local sensors. The subject of the engagement is provided on the link by a third nonC² JU. For a third party engagement, the Origin of Index Number field is set to value 0, the Index Number field is set to No Statement, the Index Originator TN field is set to the TN of the illuminator; and the Third Party Index Number field is set to the illuminator's target index number. All available target data shall be included.

(d) A surveillance engagement occurs when no nonC² JU holds the surveillance track on local sensors. The subject of the engagement is provided by monitoring the Surveillance NPG. For a surveillance engagement all index number and index number related fields are set to No Statement. The surveillance TN and all other target data shall be included.

(3) NonC² JUs report engagements using the J12.6 message containing either the Objective TN, an Index Number, or both if the data are available. If a correlation between Index Number and TN has been reported the Objective TN must be included. The SID field values used to report the engagement are 1, Engaging or Attacking, 2, Investigating, 3, Missile In Flight/Weapon Released, 6, Track/Target Destroyed, or 7, Disengaging. J12.6 messages reporting engagements are transmitted on the Control NPG. As long as the engagement status remains unchanged, the same SID field value shall be used for updates at the rate specified in section 5, part 2, Tables J12-4.1 through J12-4.6. The SID field value shall change only when the actual engagement status changes.

(4) NonC² JUs operating on Needline PGs that have the capability to report engagements against air targets may use the J12.6C1 WES field, in addition to SID field. When implemented, the WES values must be in accordance with SID field values used to report the engagement as specified in the following table. The table does not apply to the Control or nonC² JU-to-nonC² JU NPGs.

Table 4.12-3. J12.6 Engagement Status Values Relationships

Status Information Discrete Value	Weapon Engagement Status
0 - No Statement	0 - No Statement
1 - Engaging	4 - Firing/Missile in Flight/Engaging to Destroy
2 - Investigating	2 - Weapon Assigned 3 - Tracking/Locked on/Ready to Fire 11 - Investigating/Interrogating
3 - Missile in Flight/Weapon Released	4 - Firing/Missile in Flight/Engaging to Destroy
6 - Track/Target Destroyed	5 - Effective/Target Destroyed/Grand Slam
7 - Disengaging	8 - Engagement Broken
8 - Target Partially Destroyed	6 - Partially Effective
11 - Not effective	7 - Not Effective
12 - Covering	14 - Covering

(5) When operating in a flight or group only one flight member, preferably the flight leader, shall report engagement status on the Control NPG. (A flight or group is a unit made up of aircraft that will execute orders as a single entity.) The member reporting shall do so for the entire flight, e.g., if one member of the flight is still engaging then the entire flight is engaging; also, if one member of the flight has broken the engagement but the others have not, a Disengaging shall not be sent until the entire flight has broken the engagement. This procedure applies to all SID field values.

(6) A "Heads Up" can be reported using the J12.6 message with the ENV/CAT = 2 Air SID field set to value 9, Heads Up. This message may be used between nonC² JUs or from a nonC² JU to a C² JU and must include either the Objective TN, an Index Number, or both, in accordance with paragraphs (2) and (3) above.

d. Pointers. The J12.6 message with the Pointer field set to value 1 provides the capability to designate a geographic position or track/target on a JU's display. When the Pointer field is set, voice communications usually specify why the pointer was transmitted. The method of removing pointers from the receiving system's display is a system option. This use of the J12.6 Pointer message has two applications.

(1) C² JU to NonC² JU. When a C² JU desires to designate a geographic position to a nonC² JU, a J12.6 message is used on the Control NPG. Also, if the C² JU desires to call the attention of a nonC² JU to a track, a J12.6 Pointer message is used. In this case, the track/target data shall reflect the actual data of the track/target but should not be processed if the nonC² JU already holds the track/target data to preclude conflicting data. Either the Objective TN or the Index Number must be provided. When used to designate a track/target, the SID field set to value 0 shall be used, but shall not override a previously received nonzero SID field value.

(2) NonC² JU to NonC² JU/C² JU. NonC² JUs shall use the J12.6 message to call the attention of another JU to a geographic position or track/target. When it is used to designate a track/target position, a nonC² JU shall use the J12.6 message as described in paragraph (1). When a nonC² JU wishes to call the attention of a JU to a geographic position, the J12.6

message is used with the SID field set to value 0 and the Index Number and Objective TN fields set to No Statement.

e. Mark Points/Points of Interest. Mark Points may be exchanged among nonC² JUs or sent to C² JUs on the Control NPG.

(1) Mark Points are used between nonC² JUs operating in an ASO environment to exchange tactically significant data points used to depict targets of opportunity or specific points for tactical coordination.

(2) When sent to a C² JU on the Control NPG, Mark Points normally depict a Target of Opportunity or specific attack location for a large target, e.g., the front of a column of tanks or specific location on an airfield. The Controlling C² JU shall decide on an individual manual basis if the Mark Point should be sent on surveillance as a J3.0 Reference Point, J3.3 Surface (Maritime) Track, J3.5 Land (Ground) Track/Point message, or not at all.

4.12.1.3.4 NONC² JU-TO-NONC² JU NPG PROCEDURES

As discussed in paragraph 4.2.3.10.13, the NonC² JU-to-NonC² JU NPG provides the capability for nonC² JUs to exchange data. The following subparagraphs describe the uses and capabilities of this NPG.

a. NonC² JUs shall have the capability to report and update targets, report engagement status and results, and may assign targets/order engagements to other nonC² JUs on the same NonC² JU-to-NonC² JU NPG. Message protocols and sequences are described in paragraphs 4.12.1.2.7 and 4.12.1.2.8.

b. J12.6 and J12.7 messages sent on a NonC² JU-to-NonC² JU NPG shall be updated at a higher data rate than that specified for the Control NPG (see section 5, part 2, Tables J12-4.1 through J12-4.6 and J12.7 T/R rules). This is necessary to provide the greater data accuracy possible with many nonC² JU onboard sensors.

c. Assigning of targets or ordering of engagements may be accomplished by any nonC² JU that has operational authority to do so. No protocols have

been established to limit capabilities of any participating nonC² JU based on other Link 16 information provided on the interface.

d. NonC² JUs shall have the capability of operating concurrently on the Control and NonC² JU-to-NonC² JU NPGs. This enables a flight leader to report engagement status to the controlling C² JU while communicating with the flight during the conduct of the mission (see paragraph 4.12.1.3.3c(4)). It also allows all addressed nonC² JU flight members to receive controlling C² JU mission assignments, vectors, control change orders, and pointers. All participating nonC² JUs shall receive nonaddressed Control NPG communication, such as correlations and condition orders. The possibility of conflicting orders to any nonC² JU that this procedure establishes may be averted through application of operational doctrine.

e. C² JUs may receive but not transmit on a NonC² JU-to-NonC² JU NPG. A C² JU may monitor a NonC² JU-to-NonC² JU NPG in lieu of the Control NPG for the purpose of receiving target reports and engagement status to fulfill Controlling Unit reporting responsibilities delineated in paragraph 4.12.1.

4.12.1.3.5 VECTOR PROCEDURES

The J12.1 message may be used in virtually any phase of flight. Vector information is either advisory in nature or a command. When the R/C field is set to value 0, the J12.1 message is a command. When the R/C field is set to value 5, the J12.1 message is advisory, but a Machine Receipt is required. Absence of a J12.1E0 word indicates an advisory message and no R/C is required. Whenever the J12.1 message with the R/C field set to value 0 is used in conjunction with a J12.0 message, a J12.0 WILCO message must be received prior to transmitting the J12.1 message (see section 5, part 1, Table J12-3.).

4.12.1.3.6 RENDEZVOUS PROCEDURES

Tactical situations may require vectoring of nonC² JUs to a point in space used for rendezvousing to effect such actions as a join-up of nonC² JUs, placement of nonC² JUs on CAP stations, or assemblage of nonC² JUs for refueling. The J12.0I word is transmitted by the controlling C² JU to the nonC² JU to identify the rendezvous objective or mission and is followed by

the J12.0C1 word and the J12.0C2 or J12.0C3 word that provide the rendezvous point and amplifying information. The J12.0I word contains R/C information. If the J12.1 message with the R/C field set to value 0 is required, it shall be transmitted after receipt of the J12.0 WILCO message. In the event that course, altitude, or speed are required in the execution of a rendezvous, the J12.1I word with the Vector Discrete field is set to value 9, 10, or 11 and the J12.1E0 word is added to require R/C. The J10.6 Pairing message is transmitted by the controlling C² JU to other controlling C² JUs to indicate the pairing between the nonC² JU under control and the rendezvous objective. Rendezvous pairings shall be terminated by controlling C² JUs in accordance with paragraph 4.11.3.3.3.

4.12.1.3.7 CONTROL INITIATION/CHANGE PROCEDURES

The J12.4 Controlling Unit Change message is used to initiate control of a nonC² JU not under control or whose controlling unit has become inactive, to effect the handover of control from a C² JU to another controlling unit, and to terminate control of a nonC² JU. The protocols for these three distinctly different uses are specified as follows:

a. Initiation of Control. Control may be initiated either by a C² JU or by a nonC² JU. These two cases are described separately.

(1) C² JU Initiation. The C² JU initiation of control is described in the following paragraphs.

(a) If a C² JU implements the option to initiate control of a nonC² JU not currently under control, the C² JU shall transmit a J12.4I/J12.4E0 word sequence with the Control Change Indicator (CCI) field set to value 0, Control Change Order, to the nonC² JU with the R/C field set to value 0. The New Control Agency TN field shall be set to the Source TN of the initiating C² JU. The Control Channel field shall be set to the JTIDS Control Channel Number of the Control NPG on which control is desired. The Voice Frequency/Channel and Voice Frequency/Channel Indicator fields may be set to specify the UHF Frequency or Channel Group A or B to be used for Primary or Alternate voice communications. The voice call sign of the initiating C² JU may also be provided in the New Control Agency Voice Call Sign field. The Mode III Code field may be set to a Mode III code that the

nonC² JU is requested to use. The Squawk Flash Indicator may be set to request the nonC² JU to squawk flash. The Radio Type and Secure Radio Indicator fields may also be used to specify information about the UHF Frequency, if reported. The Link 4A Frequency field shall be set to No Statement.

(b) The nonC² JU addressed in the J12.4 message with the CCI field set to value 0 shall respond with a J12.4 message with the R/C field set to value 2, Machine Receipt. The nonC² JU shall also respond with a J12.4 message with an appropriate R/C field value. The C² JU shall respond with a J12.4 message with the R/C field set to value 2, Machine Receipt. If the nonC² JU response was WILCO, the nonC² JU shall transmit a J12.4I word with R/C set to value 0 and the CCI field set to value 1, Control Request, to the receiving C² JU on the Control Channel specified in the original J12.4 message with the CCI field set to value 0. The New Control Agency TN, Control Channel, Radio Type, and Secure Radio Indicator fields shall be set to No Statement.

(c) The C² JU addressed in the J12.4 message with the CCI field set to value 1 shall respond with a J12.4 message with the R/C field set to value 2, Machine Receipt, and then a J12.4 message with the R/C field set to value 4, HAVCO. The nonC² JU shall transmit a J12.4 message with the R/C field set to value 2, Machine Receipt. This completes the initiation of control.

(d) In the above sequence, if the C² JU implements the J0.3 message and has Control NPG time slots awaiting assignment to the nonC² JU, the J0.3 message shall be transmitted by the C² JU after the Machine Receipt for the original J12.4 message with the CCI field set to value 1 but before the HAVCO. The HAVCO shall not be transmitted until a Machine Receipt is received for the J0.3 message. If a CANTPRO is received for the J0.3 message, an operator in the C² JU shall be alerted in order to provide an opportunity to CANTCO the J12.4 message with the CCI field set to value 1.

(2) NonC² JU Initiation. Procedures for nonC² JU initiation of control differ depending on whether or not the nonC² JU knows the TN of the desired controlling C² JU, as described below.

MIL-STD-6016B

(a) A nonC² JU that is not currently under control and knows the TN of the desired controlling C² JU on a control channel shall initiate a request to the C² JU for control by transmitting a J12.4 message with the R/C field set to value 0 and the CCI field set to value 1, Control Request. The Addressee TN shall be set to the TN of the C² JU. The New Control Agency TN, Control Channel, Radio Type, and Secure Radio Indicator fields shall be set to No Statement. The requested C² JU shall respond with a J12.4 message with the R/C field set to value 2, Machine Receipt. The requested C² JU shall assume control by transmitting a J12.4 message with the R/C field set to value 3, WILCO, or 4, HAVCO, or refuse control by transmitting a J12.4 message with the R/C field set to value 6, CANTCO, or 7, CANTPRO, to the requesting nonC² JU. The nonC² JU shall transmit a J12.4 message with the R/C field set to value 2, Machine Receipt. If the C² JU response was WILCO or HAVCO, this completes the initiation of control. If the C² JU has other J12.4 data to provide to the nonC² JU, it must reinitiate control after control has been initially assumed, i.e., after the WILCO or HAVCO message has been transmitted and receipted. The protocols for reinitiation in this case are identical to those for C² JU initiation.

(b) In the above sequence, if the C² JU implements the J0.3 message and has Control NPG time slots awaiting assignment to the nonC² JU, the J0.3 message shall be transmitted by the C² JU after the Machine Receipt for the original J12.4 message with the CCI field set to value 1 but before the WILCO or HAVCO. The WILCO or HAVCO shall not be transmitted until a Machine Receipt is received for the J0.3 message. If a CANTPRO is received for the J0.3 message, an operator in the C² JU shall be alerted in order to provide an opportunity to CANTCO the J12.4 message with the CCI field set to value 1.

(c) When a nonC² JU not currently under control does not know the TN of the controlling C² JU on a desired control channel, it shall initiate a request for control by transmitting a J12.4I word with the R/C field set to value 1 and the CCI field set to value 1. The Addressee TN shall be set to the collective addressee, 00177 (octal). The New Control Agency TN, Control Channel, Radio Type, and Secure Radio Indicator fields shall be set to No Statement. This J12.4 message shall be transmitted periodically at an RRN of 6 (12 seconds, 8-20 second interval) until transmission is terminated by operator action or a J12.4 message with the CCI

field set to value 0, Control Change Order, is received. Any C² JU receiving this J12.4 message with the CCI field set to value 1, Control Request, shall display the request to an operator. If the operator accepts the request, the C² JU shall initiate control of the requesting nonC² JU as specified for C² JU initiation.

b. Handover of Control. The J12.4 message is also used to effect handover of nonC² JU control in conjunction with the following digital handover procedures under handover of control.

(1) A C² JU that has requested another IU to take control in the J10.3 message and has received a WILCO for the J10.3 message shall transmit a J12.4I/J12.4E0 word sequence with the R/C field set to value 0 and the CCI field set to value 0 to the nonC² JU which was the Reference TN in the J10.3 message. The New Control Agency TN field shall be set to the TN of the controlling unit receiving the handover. The New Control Agency Voice Call Sign shall be set to the voice call sign of the receiving unit, if held. The other J12.4 message fields shall be set to the same values as received in the J10.3C1 word of the WILCO message received in response to the original J10.3 message request.

(2) The nonC² JU addressed in the J12.4 message with the CCI field set to value 0 shall respond with a J12.4 message with the R/C field set to value 2, Machine Receipt. It shall also respond with a J12.4 message with an appropriate R/C. The C² JU shall respond with a J12.4 message with the R/C field set to value 2, Machine Receipt. If the response to the C² JU is WILCO, the nonC² JU shall transmit a J12.4I word three times at an RRN of 6 (12 seconds, 8-20 second interval) with the R/C field set to value 0 and the CCI field set to value 1 to the receiving C² JU on the Control Channel specified in the original J12.4 message with the CCI field set to value 0. Receipt of a response message shall cause the periodic transmission to cease. The New Control Agency TN, Control Channel, Radio Type, and Secure Radio Indicator fields shall be set to No Statement. If the nonC² JU response is CANTCO or CANTPRO, the C² JU shall retain control and transmit a J10.3 Cancel Handover message to the receiving C² JU.

(3) The C² JU addressed in the J12.4 with the CCI field set to value 1 shall respond with a J12.4 message with the R/C field set to value 2,

Machine Receipt, and a J12.4 message with the R/C field set to value 4, HAVCO. The nonC² JU shall transmit a J12.4 message with the R/C field set to value 2, Machine Receipt. This completes the handover of control. The former controlling C² JU shall not transmit a J12.4 message with the CCI field set to value 2, Terminate Control.

(4) In the above sequence, if the C² JU implements the J0.3 message and has Control NPG time slots awaiting assignment to the nonC² JU, the J0.3 message shall be transmitted by the C² JU after the Machine Receipt for the original J12.4 message with the CCI field set to value 1 but before the HAVCO. The HAVCO shall not be transmitted until a Machine Receipt is received for the J0.3 message. If a CANTPRO is received for the J0.3 message, an operator in the C² JU shall be alerted to provide an opportunity to CANTCO the J12.4 message with the CCI field set to value 1.

(5) A C² JU may direct a nonC² JU to change control to a unit that is not an IU by transmitting a J12.4I/J12.4E0 message with the CCI field set to value 0 and the R/C field set to value 0. Either the New Control Agency TN or New Control Agency Voice Call Sign must be set to other than No Statement. The Control Channel field shall be set to No Statement. Other J12.4E0 fields shall be set to other than No Statement, if data are available. The nonC² JU will respond with a J12.4 message with the R/C field set to value 2, Machine Receipt, followed by a J12.4 message with the appropriate R/C. If the controlling C² JU receives a J12.4 message with the R/C field set to value 3, WILCO, it shall report terminating control by transmitting a J10.5 message with the Controlling Unit Status field set to value 0. The nonC² JU will then contact the new controlling agency by voice as indicated in the original J12.4I/J12.4E0 message or as prebriefed. If the controlling C² JU receives a J12.4 message with the R/C field set to value 6, CANTCO, the controlling C² JU maintains control and cancels the handover. If the controlling C² JU receives a J12.4 message with the R/C field set to value 7, CANTPRO, the operator shall be alerted so that the operator may attempt the change of control by other means, e.g., voice.

If control of a paired or engaged nonC² JU is passed to a nonIU, the controlling C² JU shall send a J10.5 message indicating terminating control, and shall cease transmitting J10.6 pairings and J10.2 engagements.

c. Termination of Control. When a controlling C² JU terminates control of a controlled unit, then the C² JU shall comply with paragraph 4.11.3.2.3. The C² JU shall monitor for a response and if a CANTCO, CANTPRO, or No Machine Receipt is received, the operator shall be alerted.

4.12.1.3.8 REPORTING STATUS PROCEDURES

Air, surface (maritime), subsurface (maritime) and land (ground) platforms use Link 16 to pass their status. The reporting status structure is analogous to reporting PPLI and surveillance data; therefore, the messages are laid out according to environment/category. Procedures for reporting the status of platforms and systems are described in paragraph 4.11.3.3.2.

4.12.1.3.9 AIR TRAFFIC CONTROL

ATC is the control of aircraft for nontactical purposes. Services to aircraft include aid in arrival/departure and enroute traffic control. The J12.1 message is the basic tool used to provide ATC. When conducting ATC, the controlling C² JU uses the J12.1I word to provide the aircraft with course, altitude, and speed information; and the J12.1E0 word is used to provide R/C information. The J12.2I word is used to guide aircraft to approach and landing. The J12.3I and J12.3E0 words are used by air traffic controllers to provide aircraft with specific flight paths and altitudes. The J12.4I/J12.4E0 words provide the aircraft with the communications and IFF/SIF information necessary for local handovers.

4.12.1.3.10 AIR INTERCEPT CONTROL

AIC is the process of providing vector information to an aircraft to position it in the vicinity of another air track. The positioning data provided depends on the type of intercept to be accomplished and is indicated by the value set in the Vector Discrete field.

To initiate an intercept, the J12.0I word is transmitted to order the aircraft to engage or investigate the target. The J12.0I word is followed by the J12.0C1 and J12.0C2 words to provide amplifying target data.

4.12.1.3.11 ANTISUBMARINE WARFARE AIR CONTROL

ASW air control is the direction of aircraft capable of detecting and/or destroying submarines. Aircraft are provided with search areas, target locations, vectors for target localization and weapon release. Assignments are made using the J12.0I word, with the 12.0C3 word providing ASW related search areas and points as required. Target position may be determined by using the Objective TN and the J3 Surveillance messages. Vector information may be provided in the J12.1 message.

4.12.1.3.12 SEARCH AND RESCUE

The purpose of this mission is to assign aircraft to SAR operations. The J12.0C1 word or the J12.0C3 word, as appropriate for the aircraft, is used to indicate the location of the search point. Search patterns may be specified by using the J12.3 message, or search legs by using individual J12.1 messages.

4.12.1.3.13 REMOTELY PILOTED VEHICLE/MISSILE CONTROL

There are two distinct classes of control for these systems. One is RPV where the JU equipped RPV/missile is in positive sensor or visual contact with the controlling C² JU. The operator inputs at the C² JU directly affect the airframe's control surfaces for course, speed, and altitude changes in real time. The other class is missile control where the JU equipped RPV/missile may or may not be in positive sensor contact with the controlling C² JU and the operator's inputs are flight profile and target position data. In this case, the missile executes the profile sequentially to reach the assigned target.

In the RPV class of control the real-time changes to a RPV/missile's control surfaces are transmitted in the J12.2 message.

The missile class of control includes the ability to specify targets that are not in sensor contact with the launching unit, such as in over-the-horizon targeting. The J12.3 message fully supports this procedure by supplying the sequential flight path and altitude to the target's position.

Transfer control of RPV and missiles is TBD.

4.12.1.3.14 AUTOMATIC CARRIER LANDING SYSTEM/AUTOMATIC LANDING SYSTEM
PRECISION DIRECTION

The ACLS/Automatic Landing System (ALS) procedure is used for precise aircraft control during the final phases of landing. This direction may either be to cockpit displays and/or coupled to the autopilot for hands-off control to touchdown. The J12.1I word is used for general guidance in flight phases prior to initiation of the precision phase of the recovery. The J12.2 message then provides the precise course guidance required.

4.12.1.3.15 EXERCISE INDICATOR IN CONTROL MESSAGES

The Exercise Indicator and the Identity Amplifying Descriptor fields in the J12.0 and J12.6 message always refer to the track or sensor target. The Specific Type must also be considered artificial and for exercise purposes. No other data in the messages shall be artificial. (See paragraph 4.4.2.1.1 for the relationship between the Exercise Indicator, Identity, and Identity Amplifying Descriptor fields.)

4.12.1.4 CONDITIONAL RADIO SILENCE AIR CONTROL PROCEDURES

All JUs have the capability to select the Conditional Radio Silence mode of terminal operation. This mode is described in subsection 3.3, JTIDS/MIDS technical characteristics. JUs will have the capability to receive Link 16 data while the terminal is set to Conditional Radio Silence. Controlling C² JUs not in conditional radio silence will have the capability to transmit J-Series messages to JUs operating in the Conditional Radio Silence mode. The C² JU system may be automated to provide modified processing of J12 series messages, such as assumed responses, assigning modified R/C values, or developing J10.2 Engagement Status messages. If this automation is implemented, it shall depend upon receipt of a J2.2 message with the Network Participation Status Indicator field set to value 3 from a controlled nonC² JU. This will identify that the nonC² JU is in Conditional Radio Silence mode. Procedures for controlling nonC² JUs in the Conditional Radio Silence mode are described below.

a. Mission Assignments. The J12.0 Mission Assignment messages are transmitted in accordance with paragraph 4.12.1.3.1 and the J12.0 transmit/receive rules. However, since a conditional radio silence JU will not respond with either a machine receipt or an operator response, the C² JU must accommodate for the lack of a response. This can be accomplished either by system design or operational procedures. Any new J12.0 message transmitted will negate any previous J12.0 message.

b. Vectoring. All J12.1 Vector messages addressed to a Conditional Radio Silence nonC² JU shall be transmitted with the R/C field set to value 1, Original Order, so that no response is required.

c. Engagement Status. While controlling a JU operating in the Conditional Radio Silence mode, it is assumed that the nonC² JU will comply with J12.0 mission assignments, unless operator observation indicates otherwise, even though a WILCO response is not received. Since it is assumed that the nonC² JU will comply with the last J12.0 message transmitted, a J10.2 Engagement Status message corresponding to the last J12.0 message transmitted (see Tables 4.11-3 and 4.11-4) shall be transmitted either automatically or by operator action. T/R rules for the J10.2 message are the same regardless of the conditional radio silence status.

4.12.1.5 WEATHER OVER TARGET MESSAGE

The J17.0 Weather Over Target message is used to inform or update previously reported tactically significant weather data that exists in a target area.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 5

5. DETAILED REQUIREMENTS FOR LINK 16

5.1 DESCRIPTION OF J-SERIES MESSAGES

This section describes the Link 16 fixed format message construction and provides word applicability tables, message summaries, transmit/receive (T/R) rules, word maps, word descriptions, word notes, and field coding for the Link 16 messages.

Subsections 5.2 through 5.8, contained herein, define the requirements for the Link 16 header, initial word, extension word, and continuation word. Included are the requirements for message construction and formats, message and word numbering conventions, coding conventions, general T/R rules, and message priority.

Subsection 5.9, contained in three separate volumes (parts), presents the detailed requirements for each Link 16 message and word. The Link 16 message and words are located in the separate volumes as shown:

Volume 5.1

<u>MESSAGE</u>	<u>TITLE</u>
J0.0	Initial Entry Message
J0.1	Test Message
J0.2	Network Time Update Message
J0.3	Time Slot Assignment Message
J0.4	Radio Relay Control Message
J0.5	Repromulgation Relay Message
J0.6	Communications Control Message
J0.7	Time Slot Reallocation Message
J1.0	Connectivity Interrogation Message
J1.1	Connectivity Status Message
J1.2	Route Establishment Message
J1.3	Acknowledgement Message
J1.4	Communicant Status Message
J1.5	Net Control Initialization Message
J1.6	Needline Participation Group Assignment Message
J2.0	Indirect Interface Unit PPLI Message
J2.2	Air PPLI Message
J2.3	Surface (Maritime) PPLI Message
J2.4	Subsurface (Maritime) PPLI Message
J2.5	Land (Ground) Point PPLI Message
J2.6	Land (Ground) Track PPLI Message

MIL-STD-6016B

J3.0	Reference Point Message
J3.1	Emergency Point Message
J3.2	Air Track Message
J3.3	Surface (Maritime) Track Message
J3.4	Subsurface (Maritime) Track Message
J3.5	Land (Ground) Point/Track Message
J3.6	Space Track Message
J3.7	Electronic Warfare Product Information Message
J5.4	Acoustic Bearing/Range Message
J6.0	Amplification Message

Volume 5.2

<u>MESSAGE</u>	<u>TITLE</u>
J7.0	Track Management Message
J7.1	Data Update Request Message
J7.2	Correlation Message
J7.3	Pointer Message
J7.4	Track Identifier Message
J7.5	IFF/SIF Management Message
J7.6	Filter Management Message
J7.7	Association Message
J8.0	Unit Designator Message
J8.1	Mission Correlator Change Message
J9.0	Command Message
J9.1	Engagement Coordination Message
J10.2	Engagement Status Message
J10.3	Handover Message
J10.5	Controlling Unit Report Message
J10.6	Pairing Message
J12.0	Mission Assignment Message
J12.1	Vector Message
J12.2	Precision Aircraft Direction Message
J12.3	Flight Path Message
J12.4	Controlling Unit Change Message
J12.5	Target/Track Correlation Message
J12.6	Target Sorting Message
J12.7	Target Bearing Message

Volume 5.3

<u>MESSAGE</u>	<u>TITLE</u>
J13.0	Airfield Status Message
J13.2	Air Platform and System Status Message
J13.3	Surface (Maritime) Platform and System Status Message
J13.4	Subsurface (Maritime) Platform and System Status Message
J13.5	Land (Ground) Platform and System Status Message
J14.0	Parametric Information Message
J14.2	Electronic Warfare Control/Coordination Message
J15.0	Threat Warning Message
J17.0	Weather Over Target Message
J28.0	U.S. National 1 (Army) Message
J28.1	U.S. National 2 (Navy) Message

MIL-STD-6016B

J28.2	U.S. National 3 (Air Force) Message
J28.20	Text Message
J28.3	U.S. National 4 (Marine Corps) Message
J28.4	FR National 1
J28.5	FR National 2
J28.6	U.S. National 5 (NSA) Message
J28.7	UK National 1 Message
J29.0	Reserved
J29.1	UK National 2 Message
J29.3	SP National 1 Message
J29.4	SP National 2 Message
J29.5	CA National Message
J29.7	AU National Message
J30.0	GE National 1 Message
J30.1	GE National 2 Message
J30.2	IT National 1
J30.3	IT National 2
J30.4	IT National 3
J30.5	FR National 3 (Army)
J30.6	FR National 4 (Air Force)
J30.7	FR National 5 (Navy)
J31.0	Over-the-Air Rekeying Management Message
J31.1	Over-the-Air Rekeying Message
J31.7	No Statement Message
RTT-A	Round-Trip-Timing Interrogation - Addressed
RTT-B	Round-Trip-Timing Interrogation - Broadcast
RTT-REPLY	Round-Trip-Timing Reply

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

5.2 HEADER WORD

At the start of each time slot, a 35 bit header is transmitted. The header is then followed by one or more messages. The header is not a part of the message structure, but the information contained in it applies to all messages within the time slot. The header contains the Time Slot Type, Relayed Transmission Indicator, Type Modification, SDU Serial Number and the Source TN fields. The SDU Serial Number field is supplied by the transmitting terminal. The Source TN field is supplied by the host system identifying the originator of the message in the time slot. The Header format is shown in Figure 5.2-1.

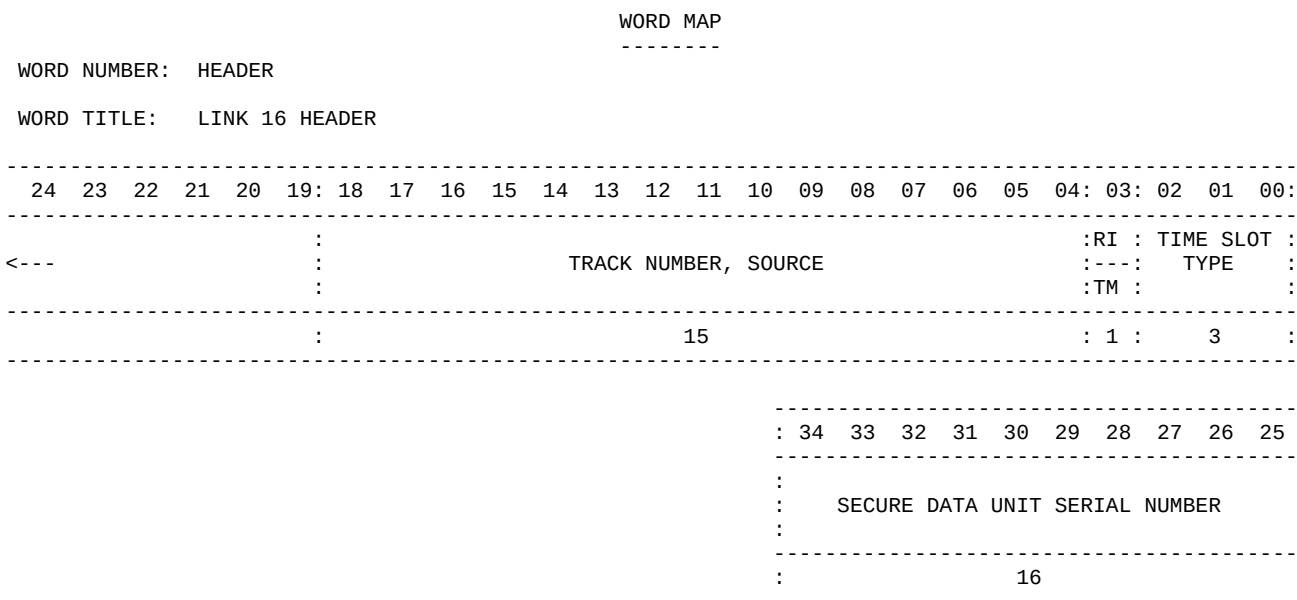


FIGURE 5.2-1. J Series Header Word Format (Sheet 1 of 6)

WORD DESCRIPTION

WORD NUMBER: HEADER

WORD TITLE: LINK 16 HEADER

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT # POSITION BITS	RESOLUTION, CODING, ETC
265 002		TIME SLOT TYPE	0- 2 3	
273 002		RELAYED TRANSMISSION INDICATOR (RI)	3 1	
849 002		TYPE MODIFIER (TM)	3 1	
769 003		TRACK NUMBER, SOURCE	4- 18 15	
1677 001		SECURE DATA UNIT SERIAL NUMBER	19- 34 16	

FIGURE 5.2-1. J Series Header Word Format (Sheet 2 of 6)

			FIELD CODING FOR HEADER (SHEET 1)	
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
265	002	TIME SLOT TYPE -----		WHEN INTERPRETED WITH THE TYPE MODIFICATION FIELD, THIS FIELD DESCRIBES THE CHARACTERISTICS OF A TIME SLOT.
		TYPE 0	0	1. WHEN THE TYPE MODIFICATION IS ZERO AND THE HEADER IS INTERLEAVED, THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS: (A) MESSAGE PACKAGE STRUCTURE: STANDARD DOUBLE PULSE. (B) MESSAGE FORMAT: FREE TEXT. (C) ERROR CORRECTION CODING: UNCODED.
		TYPE 1	1	2. WHEN THE TYPE MODIFICATION IS ONE AND THE HEADER IS INTERLEAVED, THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS: (A) MESSAGE PACKAGE STRUCTURE: PACKED 2 SINGLE-PULSE. (B) MESSAGE FORMAT: FREE TEXT. (C) ERROR CORRECTION CODING: UNCODED.
		TYPE 2	2	1. WHEN THE TYPE MODIFICATION IS ZERO AND THE HEADER IS INTERLEAVED, THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS: (A) MESSAGE PACKAGE STRUCTURE: PACKED 2 DOUBLE PULSE. (B) MESSAGE FORMAT: FREE TEXT. (C) ERROR CORRECTION CODING: UNCODED.
				2. WHEN THE TYPE MODIFICATION IS ONE AND THE HEADER IS INTERLEAVED, THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS: (A) MESSAGE PACKAGE STRUCTURE: PACKED 4 SINGLE PULSE. (B) MESSAGE FORMAT: FREE TEXT. (C) ERROR CORRECTION CODING: UNCODED.
				1. WHEN THE TYPE MODIFICATION IS ZERO AND THE HEADER IS INTERLEAVED, THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS: (A) MESSAGE PACKAGE STRUCTURE:

FIGURE 5.2-1. J Series Header Word Format (Sheet 3 of 6)

			FIELD CODING FOR HEADER (SHEET 2)	
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
265	002	TIME SLOT TYPE -----	(CONTINUED)	
				PACKED 2 DOUBLE PULSE. (B) MESSAGE FORMAT: FREE TEXT. (C) ERROR CORRECTION CODING: CODED.
				2. WHEN THE TYPE MODIFICATION IS ONE AND THE HEADER IS INTERLEAVED, THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS:
				(A) MESSAGE PACKAGE STRUCTURE: PACKED 4 SINGLE PULSE. (B) MESSAGE FORMAT: FREE TEXT. (C) ERROR CORRECTION CODING: CODED.
				3. WHEN THE TYPE MODIFICATION IS ZERO AND THE HEADER IS NOT INTER- LEAVED, THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS:
				(A) MESSAGE PACKAGE STRUCTURE: RTT. (B) MESSAGE FORMAT: ADDRESSED. (C) ERROR CORRECTION CODING: CODED.
				4. WHEN THE TYPE MODIFICATION IS ONE AND THE HEADER IS NOT INTER- LEAVED, THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS:
				(A) MESSAGE PACKAGE STRUCTURE: RTT. (B) MESSAGE FORMAT: BROADCAST. (C) ERROR CORRECTION CODING: CODED.
		TYPE 3	3	THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS:
				(A) MESSAGE PACKAGE STRUCTURE: PACKED 2 SINGLE PULSE. (B) MESSAGE FORMAT: FIXED FORMAT. (C) ERROR CORRECTION CODING: CODED.
		TYPE 4	4	THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS:
				(A) MESSAGE PACKAGE STRUCTURE:

FIGURE 5.2-1. J Series Header Word Format (Sheet 4 of 6)

			FIELD CODING FOR HEADER (SHEET 3)	
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
265	002	TIME SLOT TYPE -----	(CONTINUED)	
		TYPE 5	5	STANDARD DOUBLE PULSE. (B) MESSAGE FORMAT: FIXED FORMAT. (C) ERROR CORRECTION CODING: CODED. THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS: (A) MESSAGE PACKAGE STRUCTURE: PACKED 2 DOUBLE PULSE. (B) MESSAGE FORMAT: FIXED FORMAT. (C) ERROR CORRECTION CODING: CODED.
		TYPE 6	6	1. WHEN THE TYPE MODIFICATION IS ZERO AND THE HEADER IS INTER- LEAVED, THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS: (A) MESSAGE PACKAGE STRUCTURE: STANDARD DOUBLE PULSE. (B) MESSAGE FORMAT: FREE TEXT. (C) ERROR CORRECTION CODING: CODED. 2. WHEN THE TYPE MODIFICATION IS ONE AND THE HEADER IS INTERLEAVED, THE TIME SLOT HAS THE FOLLOWING STRUCTURE: (A) MESSAGE PACKAGE STRUCTURE: PACKED 2 SINGLE PULSE. (B) MESSAGE FORMAT: FREE TEXT. (C) ERROR CORRECTION CODING: CODED.
		TYPE 7	7	THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS: (A) MESSAGE PACKAGE STRUCTURE: PACKED 4 SINGLE PULSE. (B) MESSAGE FORMAT: FIXED FORMAT. (C) ERROR CORRECTION CODING: CODED.

FIGURE 5.2-1. J Series Header Word Format (Sheet 5 of 6)

FIELD CODING FOR HEADER (SHEET 4)				
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
273	002	RELAYED TRANSMISSION INDICATOR ----- RELAYED TIME SLOT DATA RELAYED	1	USED TO INDICATE WHETHER OR NOT A A RELAYED MESSAGE DATA SHOULD NOT BE USED FOR RELATIVE NAVIGATION.
849	002	TYPE MODIFICATION ----- TYPE MODIFICATION 0 TYPE MODIFICATION 1	 0 1	MODIFIES THE INTERPRETATION OF THE TYPE FIELD OF FREE TEXT MESSAGES (TYPES 0, 1, 2, AND 6) AFFECTS THE INTERPRETATION OF TIME SLOT TYPES 0, 1, 2, AND 6. AFFECTS THE INTERPRETATION OF TIME SLOT TYPES 0, 1, 2, AND 6.
769	003	TRACK NUMBER, SOURCE ----- NO STATEMENT NUMERIC ILLEGAL NUMERIC NUMERIC NUMERIC NUMERIC ILLEGAL NUMERIC NUMERIC	 00000 (OCTAL) 00001 THROUGH 00076 (OCTAL) 00077 (OCTAL) 00100 THROUGH 00175 (OCTAL) 00176 (OCTAL) 00177 (OCTAL) 00200 THROUGH 07776 (OCTAL) 07777 (OCTAL) 10000 THROUGH 77776 (OCTAL) 77777 (OCTAL)	THE TN OF THE UNIT (I.E., JU OR PU) THAT ORIGINATED THE MESSAGE. ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU). ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU). RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS. COLLECTIVE ADDRESS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL IN- FORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL IN- FORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS. ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
1677	001	SECURE DATA UNIT SERIAL NUMBER ----- SEE DUI EXPLANATION	 0 THROUGH 65535	DATA INSERTED BY SOURCE SECURE DATA UNIT OF THE ORIGINATOR AND CAN BE INTERPRETED ONLY BY THE SECURE DATA UNIT.

FIGURE 5.2-1. J Series Header Word Format (Sheet 6 of 6)

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

5.3 MESSAGE CONSTRUCTION

Link 16 messages are functionally-oriented, variable-length strings of 75-bit words. A message is started by an initial word, which may then be followed by extension words to transmit logically associated data field groupings longer than can be accommodated by the initial word. The extension words may be followed by continuation words, which supply supplemental information that is normally transmitted on an infrequent basis. There may be multiple Link 16 messages, varying in function, within a time slot. However, each message shall reside and be capable of interpretation totally within a single time slot. The message or set of messages transmitted in a time slot shall be composed by the JU in accordance with paragraph 5.7.1b.

5.3.1 WORD CONSTRUCTION

The following paragraphs describe Link 16 word construction.

5.3.1.1 GENERAL

Each 75-bit word contains a 5-bit Parity field. (For a description of Parity encoding, see the JTIDS/MIDS Technical Characteristics, Section 3, Terms and Definitions. Each 75-bit word is uniquely identified as an initial word, an extension word or a continuation word. For this identification, each word contains a 2-bit Word Format field. The Word Format field is interpreted as follows:

- a. $WF = 00_2$ Indicates an initial word.
- b. $WF = 10_2$ Indicates an extension word.
- c. $WF = 01_2$ Indicates a continuation word.
- d. $WF = 11_2$ Indicates a variable message format word.

5.3.1.1.1 INITIAL WORD

Figure 5.3-1 shows the format for an initial word. Each initial word contains a 5-bit Label, Link 16 field; a 3-bit Sublabel, Link 16 field; and a

3-bit Message Length Indicator (MLI) field. Each combination of a specific label and sublabel defines one of 256 possible combinations.

The MLI field indicates the total number of extension and/or continuation words that follow the initial word. This is provided as an additional aid to maintaining orientation in the word stream and to speed discarding filtered messages. See also paragraph 5.5.

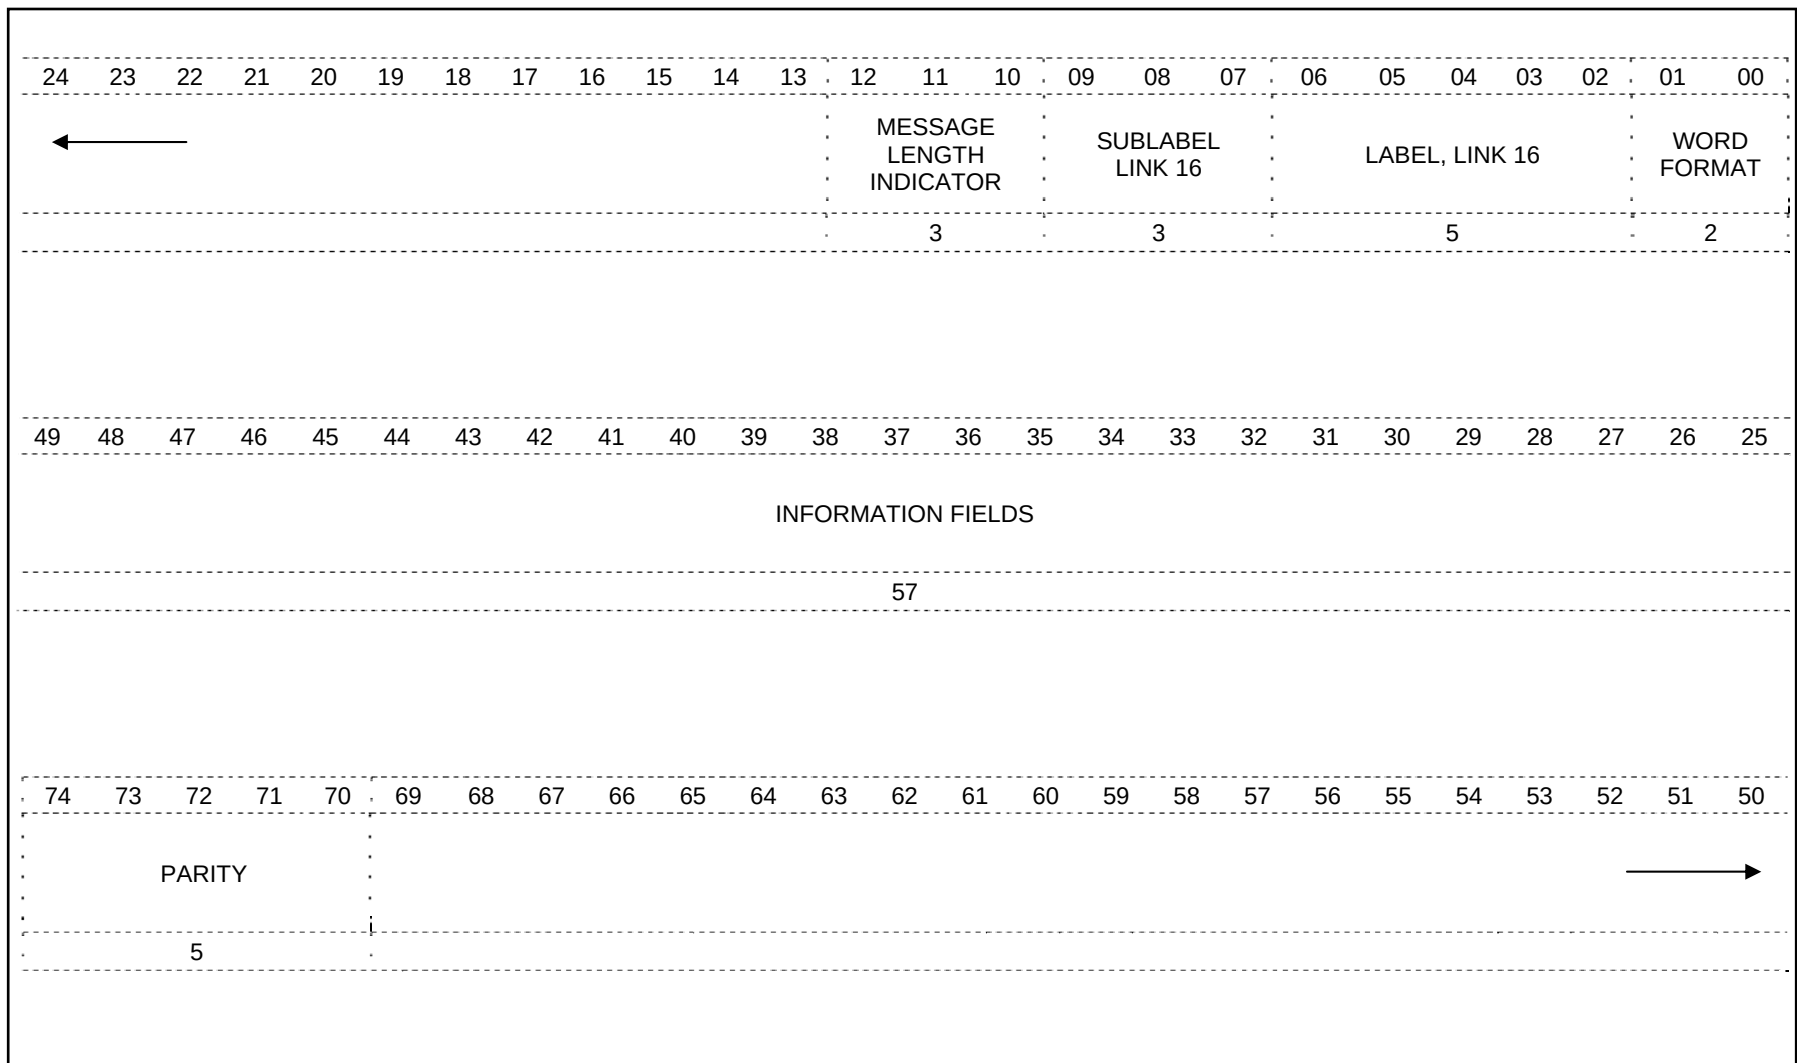


Figure 5.3-1. J Series Initial Word Format

5.3.1.1.2 EXTENSION WORD

Figure 5.3-2 shows the format for an extension word. Extension words are defined for an initial word when the length of the data field groupings logically transmitted as an entity exceeds the space available in the initial word. Since the data fields in the extension words are defined and interpreted solely with respect to the label and sublabel field combination in the initial word, they must be transmitted in serial order. For example, if the j th extension word of the n extension words defined for a given initial word is to be transmitted, all " i " words, i is less than j , must precede the j th word. If any extension word is to be repeated, it must be the last extension word for that message.

5.3.1.1.3 CONTINUATION WORD

Figure 5.3-3 shows the format for a continuation word. Continuation words provide additional amplifying information in support of the initial word and extension words. Continuation words are transmitted after the last extension word, or immediately after the initial word if no extension words are transmitted. Each continuation word contains a 5-bit Continuation Word Label field used to uniquely identify the continuation word. The Continuation Word Label field can be defined for values from 0 through 31, allowing for a maximum of 32 continuation words for any sublabel. Unlike extension words, continuation words can be sent in any order unless otherwise specified in individual message transmission rules.

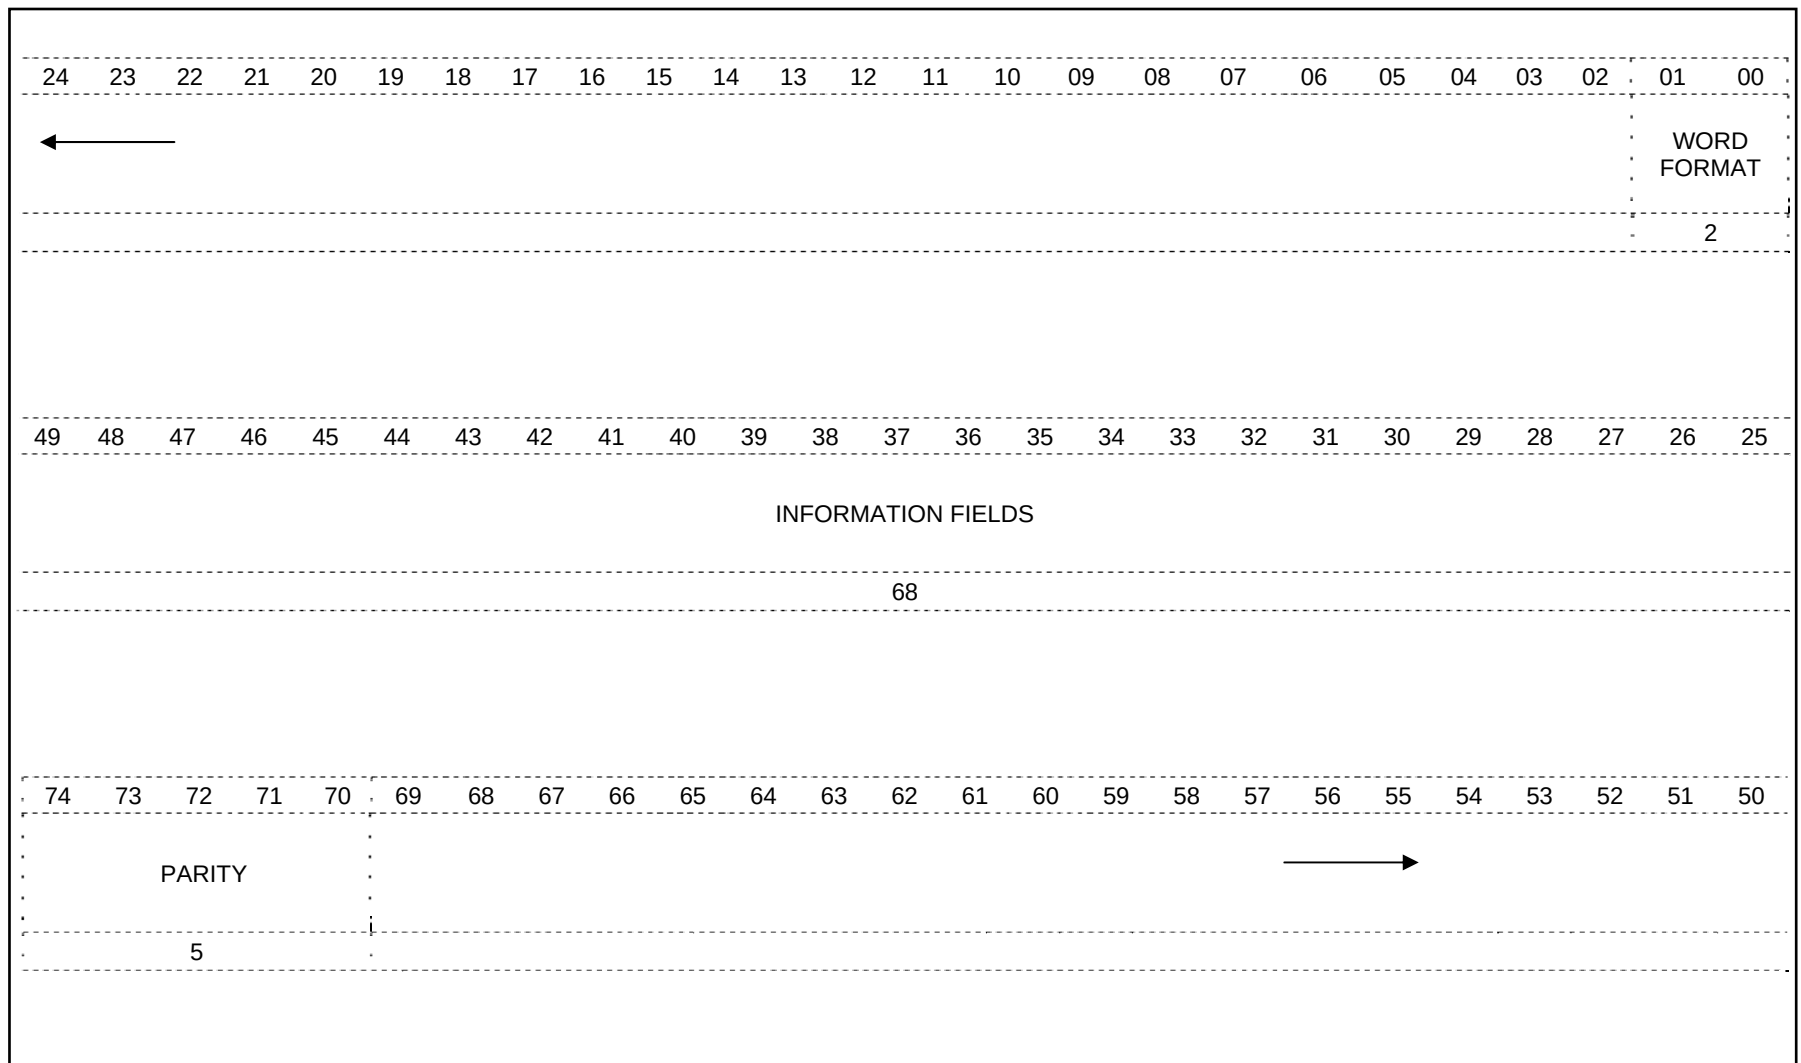


Figure 5.3-2. J Series Extension Word Format

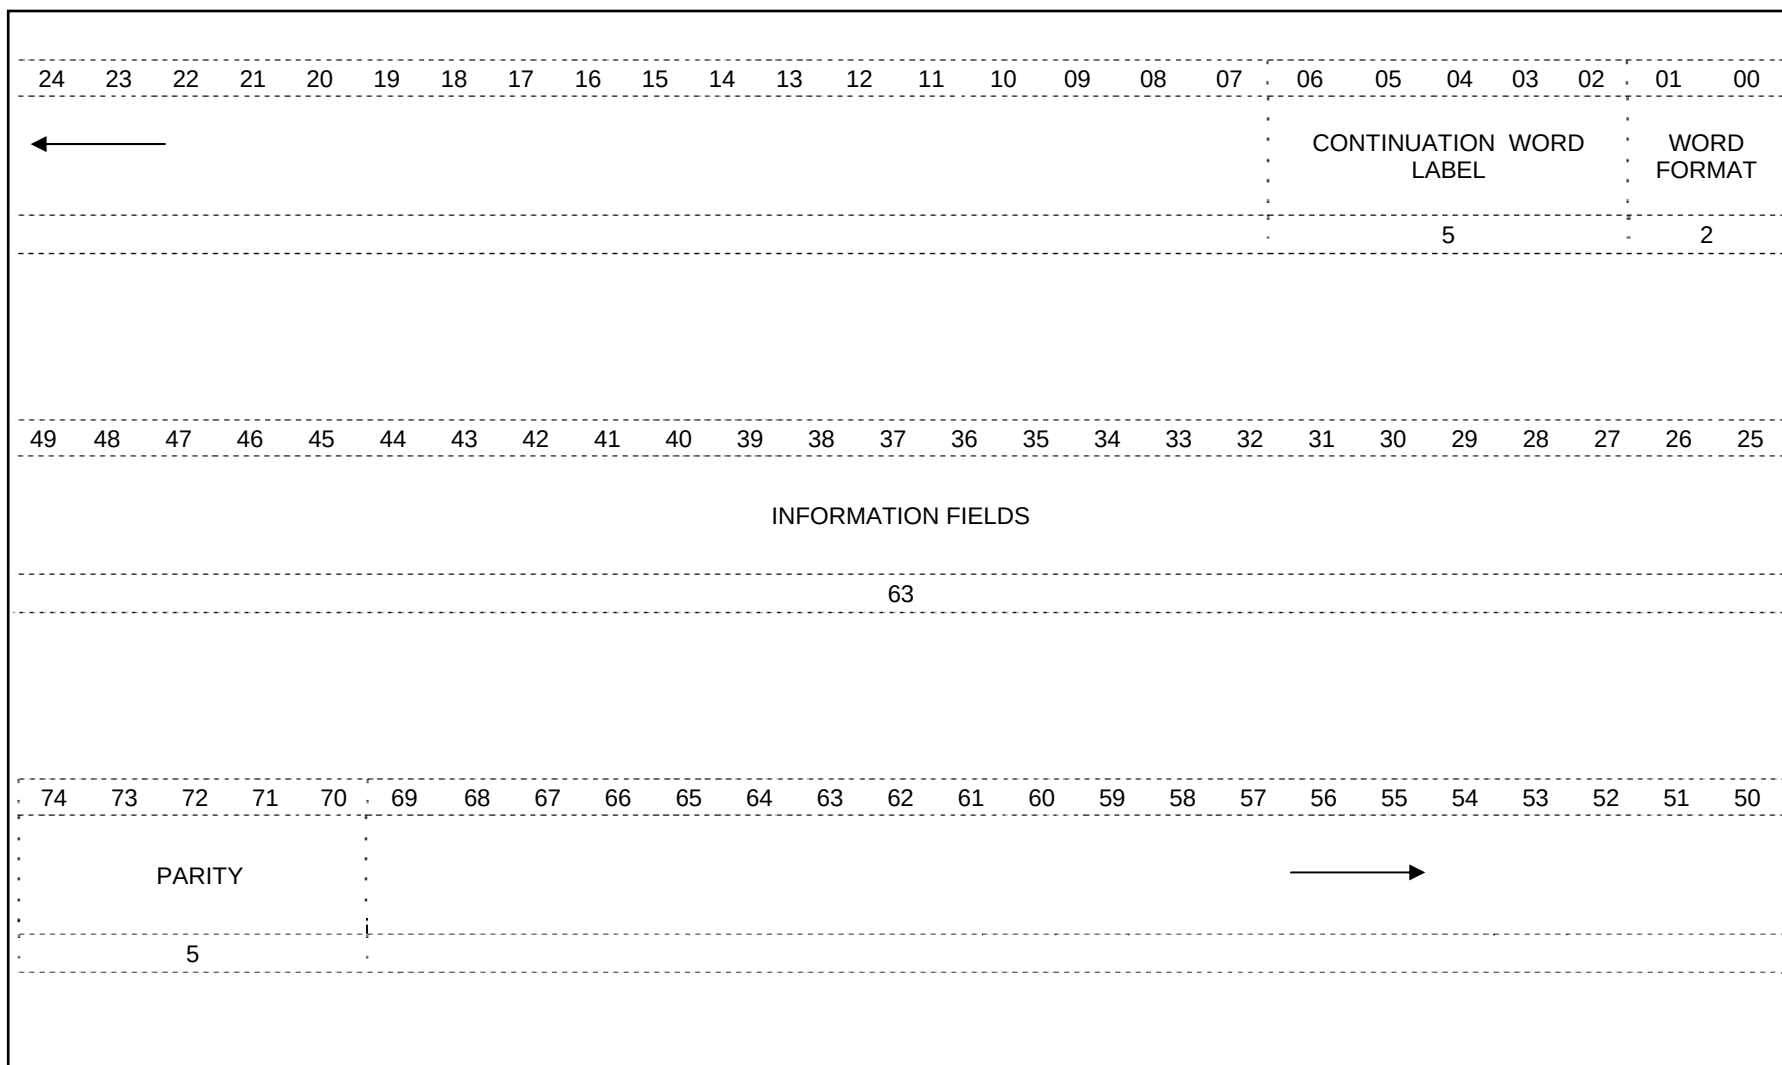


Figure 5.3-3. J Series Continuation Word Format

5.4 MESSAGE AND WORD NUMBERING CONVENTION

The following numbering convention is defined to identify the J series fixed format messages and words.

5.4.1 MESSAGE

Jn.m is the numbering convention for a Link 16 message, i.e., a combination of one initial word, and any legal combination of extension and continuation words, where n is the Label, Link 16 field value and 0 is less than or equal to n is less than or equal to 31, and m is the Sublabel, Link 16 field value and 0 is less than or equal to m is less than or equal to 7.

For example, J3.2 is the numbering convention for the Air Track message.

5.4.2 BASIC MESSAGE

Jn.mB is the numbering convention for a Link 16 Basic message, i.e., a combination of an initial word and all extension words that make up a minimum-length message as defined in the T/R rules for the message.

For example, J3.2B is the numbering convention for the Air Track Basic message consisting of the J3.2I Air Track initial word and the J3.2E0 Air Track extension word.

5.4.3 INITIAL WORD

Jn.mI is the numbering convention for the initial word for a Jn.m message.

For example, J3.2I is the numbering convention for the initial word for the J3.2 Air Track message.

5.4.4 EXTENSION WORD

Jn.mEx is the numbering convention for the extension word x for the Jn.m message, where x is a decimal number from 0 through the limitation imposed by the MLI field.

For example, J3.2E0 is the numbering convention for the first extension word for the J3.2 Air Track message.

5.4.5 CONTINUATION WORD

Jn.mCx is the numbering convention for the continuation word x for the Jn.m message, where x is a number from 0 through 31.

For example, J3.2C1 is the number of the first continuation word for the J3.2 Air Track message. (NOTE: Continuation word number 0 is not currently defined for any messages. Therefore, continuation word number 1 is actually the first defined continuation word of all currently defined messages.)

5.4.6 LINK 16 MESSAGE LABELING SCHEME

Table 5.4-1 lists the Link 16 message titles under this labeling scheme.

TABLE 5.4-1. JTIDS/MIDS Messages

j n. m	m	0	1	2	3	4	5	6	7
0 - NETWORK MANAGEMENT		INITIAL ENTRY	TEST	NETWORK TIME UPDATE	TIME SLOT ASSIGNMENT	RADIO RELAY CONTROL	REPROMULGATION RELAY	COMMUNICATIONS CONTROL	TIME SLOT REALLOCATION
1 - NETWORK MANAGEMENT		CONNECTIVITY INTERROGATION	CONNECTIVITY STATUS	ROUTE ESTABLISHMENT	ACKNOWLEDGEMENT	COMMUNICANT STATUS	NET CONTROL INITIALIZATION	NEEDLINE PARTICIPATION GROUP ASSIGNMENT	
2 - PRECISE PARTICIPANT LOCATION AND IDENTIFICATION		INDIRECT INTERFACE UNIT		AIR	SURFACE (MARITIME)	SUBSURFACE (MARITIME)	LAND (GROUND) POINT	LAND (GROUND) TRACK	
3 - SURVEILLANCE		REFERENCE POINT	EMERGENCY POINT	AIR TRACK	SURFACE (MARITIME) TRACK	SUBSURFACE (MARITIME) TRACK	LAND (GROUND) POINT/TRACK	SPACE TRACK	ELECTRONIC WARFARE PRODUCT INFORMATION
4 - UNUSED									
5 - ASW						ACOUSTIC BEARING/RANGE			
6 - AMPLIFICATION		AMPLIFICATION INFORMATION							
7 - INFORMATION MANAGEMENT		TRACK MANAGEMENT	DATA UPDATE REQUEST	CORRELATION	POINTER	TRACK IDENTIFIER	IFF/SIF MANAGEMENT	FILTER MANAGEMENT	ASSOCIATION
8 - INFORMATION MANAGEMENT		UNIT DESIGNATOR	MISSION CORRELATOR CHANGE						
9 - WEAPONS COORDINATION AND MANAGEMENT		COMMAND	ENGAGEMENT COORDINATION						
10 - WEAPONS COORDINATION AND MANAGEMENT				ENGAGEMENT STATUS	HANDOVER		CONTROLLING UNIT REPORT	PAIRING	
11 - UNUSED									
12 - CONTROL		MISSION ASSIGNMENT	VECTOR	PRECISION AIRCRAFT DIRECTION	FLIGHT PATH	CONTROLLING UNIT CHANGE	TARGET/TRACK CORRELATION	TARGET SORTING	TARGET BEARING
13 - PLATFORM AND SYSTEM STATUS		AIRFIELD		AIR	SURFACE (MARITIME)	SUBSURFACE (MARITIME)	LAND (GROUND)		
14 - CONTROL		PARAMETRIC INFORMATION		EW CONTROL COORDINATION					
15 - THREAT WARNING		THREAT WARNING							
16 - UNUSED									
17 - MISCELLANEOUS		WEATHER OVER TARGET							
18-27 - UNUSED									
28 - NATIONAL USE		U.S. NATIONAL 1 (ARMY)	U.S. NATIONAL 2 (NAVY)	U.S. NATIONAL 3 (AIR FORCE)	U.S. NATIONAL 4 (MARINE CORPS)	FR NATIONAL 1	FR NATIONAL 2	U.S. NATIONAL 5 (NSA)	UK NATIONAL 1
29 - NATIONAL USE		RESERVED	UK NATIONAL 2		SP NATIONAL 1	SP NATIONAL 2	CA NATIONAL		AU NATIONAL
30 - NATIONAL USE		GE NATIONAL 1	GE NATIONAL 2	IT NATIONAL 1	IT NATIONAL 2	IT NATIONAL 3	FR NATIONAL 3 (ARMY)	FR NATIONAL 4 (AIR FORCE)	FR NATIONAL 5 (NAVY)
31 - MISCELLANEOUS		OVER-THE-AIR REKEYING MANAGEMENT	OVER-THE-AIR REKEYING						NO STATEMENT
RTT - ROUND-TRIP-TIMING		RTT INTERROGATION ADDRESSED	RTT INTERROGATION BROADCAST	RTT REPLY					

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

5.5 MESSAGE LENGTH INDICATOR FIELD AND MESSAGE LENGTH

5.5.1 MESSAGE LENGTH INDICATOR FIELD

The MLI field in the initial word indicates the number of extension plus continuation words that follow the initial word. For Link 16 messages currently defined, the MLI field is three bits in length, allowing from zero through seven following words.

5.5.2 MESSAGE LENGTH

A time slot carries three words when the terminal is operating a Standard DP message packing structure; six words with a Packed-2 structure, and twelve words with Packed-4. The message construction rules (see paragraph 5.3) state that each J-Series message must be capable of interpretation totally within a single time slot. Thus, the maximum possible length of message is three words in Standard DP (packing structure limit), six words in Packed-2 (packing structure limit), and eight words in Packed-4 (MLI field limit). In this latter case, the MLI would be set to value 7 to indicate seven additional extension and/or continuation words following the initial word.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

5.6 CODING CONVENTIONS

To minimize incompatibilities in the interface design and programming, certain coding conventions have been adopted and are described in the following paragraphs.

5.6.1 POSITION INFORMATION

The position of a track or point shall be expressed in latitude and longitude, as defined by the WGS-84, with geoid parameters 6,378,137 meters for equatorial radius and 1/298.257223563 for polar flattening. Position shall normally be sent extrapolated to the instant of transmission, except for nonreal-time tracks.

5.6.2 VERTICAL POSITION MEASUREMENT

The vertical measurement of the position of a track, whether expressed as altitude, elevation, height, etc., shall be reported as measured radially outward from the center of the earth to the track as a positive quantity in units of feet above mean sea level (MSL) unless otherwise stated, e.g., above ground level (AGL).

5.6.3 VELOCITY INFORMATION

Velocity information shall be transmitted as course and speed. Course shall be expressed in degrees referenced to true north (true north and geographic north are considered synonymous) unless otherwise stated. Speed is defined as the rate of change of position over the ground and is expressed in data miles per hour unless otherwise stated.

5.6.4 COURSE/BEARING INFORMATION

All Course/Bearings shall be in degrees, referenced to true north. Any conversion to magnetic north or other relative values shall be performed by the host systems.

5.6.5 TIME INFORMATION

All times on the interface shall be in Greenwich Mean Time (GMT). Any required conversion to local time shall be performed by the host systems.

5.6.6 DATA FIELD CODING

The data fields used in the interface are of two types, logical and numeric. Logical data fields are fields whose bit configurations represent logical values as described in the applicable message definition. Numeric data fields are multibit fields whose bit configurations represent actual numeric values. The least significant bit value and the value range are described in the applicable message definition. Unless otherwise specified, all data fields are read from left to right (higher bit number to lower bit number), with the most significant bit on the left.

5.6.7 SPARE FIELDS

a. Spare fields are included in some messages. When transmitted these spare fields will be encoded as zero and shall not be processed upon receipt. Messages shall not be discarded upon receipt of non-zero spare fields.

b. Disused fields are spare fields that previously had a valid meaning. When transmitted, Disused fields shall be encoded as 0 and shall not be processed upon receipt. Messages shall not be discarded upon receipt of a nonzero Disused field.

c. One or more of the bits of a Disused field cannot be renamed without considering coordinated implementation. Once one or more bits of a Disused field have been so reused the remaining bits, if any, shall be renamed as a Spare field or, if not contiguous, Spare fields.

5.6.8 NEGATIVE VALUES

A negative number shall be coded and transmitted with twos complement coding and identified by the number one in the most significant bit of the data field. Conversion to ones complement coding, when required by a TDS, shall be provided by the JTIDS/MIDS terminal.

5.6.9 PROTECTIVE CODING

All interface units shall design and program in such a manner that they are protected in case they receive a message containing illegal values. Messages shall not be discarded upon receipt of undefined values of defined fields, except in the case of values which if received would render the message unusable. When messages are received containing undefined values of defined fields, and other data fields of the message could be processed and interpreted properly, the field containing the undefined values shall be processed as the default value, and the other fields of the message shall be processed as implemented.

5.6.10 FIELDS NOT IMPLEMENTED

IUs that have not implemented any values of a field shall transmit a No Statement value for that field or an equivalent value which is specified in the minimum implementation rules.

5.6.11 NO STATEMENT/NO DATA

The no statement/no data value shall be coded as the zero value except when zero is a valid numeric value. In this case the no statement/no data value shall be the maximum value possible for that field. In each case where the data item (DI) meaning is No Statement or No Statement combined with other DI meanings, such as Unknown, Pending, Other, Estimated, General, etc., the DI indicates that no data are being reported for the affected data element.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

5.7 MESSAGE DESCRIPTION DOCUMENTATION

Table 5.7-1 lists the Link 16 fixed format messages. The messages are described by the following:

a. Word Applicability Table. The Word Applicability Table lists the valid initial words for each Label, Link 16 value and the valid extension and continuation words for each Sublabel, Link 16 value within that label. A separate table is provided for each Label, Link 16 value.

b. Message Summary. The message summary contains the message purpose and provides a list of the data elements comprising each word in the message. The message summary also lists the bit length of each data element. A separate message summary is provided for each Link 16 message defined by a valid combination of label and sublabel.

c. Transmit/Receive Rules. The T/R rules provide the unique rules that govern the transmission and reception of individual Link 16 messages. A separate set of rules is provided for each Link 16 message.

d. Minimum Implementation. The minimum implementation requirements define the minimum amount of information that must be exchanged in order to interoperate. Separate minimum implementation requirements are provided for each Link 16 message in Appendix A.

e. Link 16 Word Presentation. The format and content of each initial, extension, and continuation word comprising a Link 16 message is defined by a word map; a word description; word notes, when applicable; and field coding. The word map shows the field construction for each word. The word description provides, for each data element within the word, a Data Field Identifier (DFI)/Data Use Identifier (DUI) reference number; a field descriptor when applicable; bit positions of the data element within the message; length of the data element, in bits; and any applicable resolution and coding. Notes are provided when necessary to further explain data elements and message construction. Field coding provides the definition of each value of each data element.

The following paragraphs provide additional information concerning the T/R rules and minimum implementation requirements.

MIL-STD-6016B

TABLE 5.7-1. List of Link 16 Messages (Sheet 1 of 3)

<u>NUMBER</u>	<u>TITLE</u>
<u>NETWORK MANAGEMENT</u>	
J0.0	Initial Entry Message
J0.1	Test Message
J0.2	Network Time Update Message
J0.3	Time Slot Assignment Message
J0.4	Radio Relay Control Message
J0.5	Repromulgation Relay Message
J0.6	Communications Control Message
J0.7	Time Slot Reallocation Message
J1.0	Connectivity Interrogation Message
J1.1	Connectivity Status Message
J1.2	Route Establishment Message
J1.3	Acknowledgement Message
J1.4	Communicant Status Message
J1.5	Net Control Initialization Message
J1.6	Needline Participation Group Assignment Message
<u>PRECISE PARTICIPANT LOCATION AND IDENTIFICATION</u>	
J2.0	Indirect Interface Unit PPLI Message
J2.2	Air PPLI Message
J2.3	Surface (Maritime) PPLI Message
J2.4	Subsurface (Maritime) PPLI Message
J2.5	Land (Ground) Point PPLI Message
J2.6	Land (Ground) Track PPLI Message
<u>SURVEILLANCE</u>	
J3.0	Reference Point Message
J3.1	Emergency Point Message
J3.2	Air Track Message
J3.3	Surface (Maritime) Track Message
J3.4	Subsurface (Maritime) Track Message
J3.5	Land (Ground) Point/Track Message
J3.6	Space Track Message
J3.7	Electronic Warfare Product Information Message
<u>ANTISUBMARINE WARFARE</u>	
J5.4	Acoustic Bearing/Range Message

MIL-STD-6016B

TABLE 5.7-1. List of Link 16 Messages (Sheet 2 of 3)

INTELLIGENCE

J6.0 Amplification Message

INFORMATION MANAGEMENT

J7.0 Track Management Message
J7.1 Data Update Request Message
J7.2 Correlation Message
J7.3 Pointer Message
J7.4 Track Identifier Message
J7.5 IFF/SIF Management Message
J7.6 Filter Management Message
J7.7 Association Message
J8.0 Unit Designator Message
J8.1 Mission Correlator Change Message

WEAPONS COORDINATION AND MANAGEMENT

J9.0 Command Message
J9.1 Engagement Coordination
J10.2 Engagement Status Message
J10.3 Handover Message
J10.5 Controlling Unit Report Message
J10.6 Pairing Message

CONTROL

J12.0 Mission Assignment Message
J12.1 Vector Message
J12.2 Precision Aircraft Direction Message
J12.3 Flight Path Message
J12.4 Controlling Unit Change Message
J12.5 Target/Track Correlation Message
J12.6 Target Sorting Message
J12.7 Target Bearing Message
J14.0 Parametric Information Message
J14.2 Electronic Warfare Control/Coordination Message
J17.0 Weather Over Target

MIL-STD-6016B

TABLE 5.7-1. List of Link 16 Messages (Sheet 3 of 3)

PLATFORM AND SYSTEM STATUS

J13.0	Airfield Status Message
J13.2	Air Platform and System Status Message
J13.3	Surface (Maritime) Platform and System Status Message
J13.4	Subsurface (Maritime) Platform and System Status Message
J13.5	Land (Ground) Platform and System Status Message

THREAT WARNING

J15.0	Threat Warning Message
-------	------------------------

National USE

J28.0	U.S. National 1 (Army) Message
J28.1	U.S. National 2 (Navy) Message
J28.2	U.S. National 3 (Air Force) Message
J28.20	Text Message
J28.3	U.S. National 4 (Marine Corps) Message
J28.4	FR National 1
J28.5	FR National 2
J28.6	U.S. National 5 (NSA) Message
J28.7	UK National 1 Message
J29.0	Reserved
J29.1	UK National 2 Message
J29.3	SP National 1 Message
J29.4	SP National 2 Message
J29.5	CA National Message
J29.7	AU National Message
J30.0	GE National 1
J30.1	GE National 2
J30.2	IT National 1
J30.3	IT National 2
J30.4	IT National 3
J30.5	FR National 3 (Army)
J30.6	FR National 4 (Air Force)
J30.7	FR National 5 (Navy)

MISCELLANEOUS

J31.0	Over-the-Air Rekeying Management Message
J31.1	Over-the-Air Rekeying Message
J31.7	No Statement Message

ROUND-TRIP-TIMING

RTT-A	Round-Trip-Timing Interrogation - Addressed
RTT-B	Round-Trip-Timing Interrogation - Broadcast
RTT-REPLY	Round-Trip-Timing Reply

5.7.1 TRANSMIT/RECEIVE RULES

This paragraph defines general T/R rules that are applicable to all messages and the conventions used to specify individual message T/R rules.

a. Transmit Opportunities. The initial transmission of a message shall occur at the transmitting JU's first transmit opportunity. The first transmit opportunity is defined as a time slot assigned to a JU for transmission of a message type which is not required by that JU for transmission of a higher priority message (see paragraph 5.8).

b. Transmission Preparation. A JU shall select the message(s) to be transmitted in a time slot based on message type, message priority, and available space. Only those messages belonging to the Network PG applicable to the time slot shall be considered for transmission. Within this group of messages, the selection shall be based on message priority level (see paragraph 5.8) and available space. Three, six, or twelve (if allowed) fixed format words shall be transmitted in a time slot. The J31.7 No Statement message shall be transmitted in each unused word in a time slot. If the use of single-pulse transmission symbols has not been inhibited by the operator (see the JTIDS/MIDS Technical Characteristics, Section 3, Terms and Definitions), the JU shall determine, on a time-slot-by-time-slot basis, whether three, six, or twelve words shall be transmitted. Six or twelve words shall be transmitted (single-pulse transmission symbols used) if additional applicable messages are available for transmission and they can be included in the transmission.

c. Redundant Transmissions. Certain Link 16 messages shall be transmitted several times at specified intervals in order to increase the probability that the message is received by all interested JUs. The redundant transmission of messages in successive intervals is defined for the normal situations in which the information being transmitted remains unchanged through the entire redundancy period. In those instances where data being reported are changed by the reporting JU, it is desirable for that JU to stop the redundant transmission of obsolete data and commence reporting the new data. However, dropping a track shall not result in stopping the transmission of messages pertaining to that track in the redundant transmission cycle. Redundant transmission rules are specified in terms of

the number of times a message shall be transmitted and the interval between successive transmissions. Successive intervals for redundant messages are specified as follows:

Successive intervals for redundant messages are specified in terms of RRNs and time intervals. The RRN and time interval in the T/R rules equate to the nominal number of time slots after a given transmission of a message a JU must wait prior to the next transmission of the same message, i.e., an RRN of 6 (12 seconds, 8-20 second interval). This notation is interpreted as meaning the interval between the transmissions of the same message should equal an RRN of 6, which calls for a desired 12 second time interval and an allowable deviation of from 8 to 20 seconds. When the use of a message dictates that this interval cannot vary, the RRN statement in the T/R rules shall so state, i.e., an RRN of 6 (12 seconds). Table 5.7-2 shows the relationship between the RRN, the desired interval, and the allowable deviation.

d. Periodic Transmission. Certain messages are defined to be transmitted continuously at specified intervals in order to provide periodic updates to JUs. The periodic transmission rate is specified in terms of an RRN.

e. Data Availability. Transmission rules are sometimes stated so that transmission is required when "data are available" or a similar statement appears for a word of the message. The term "data are available" means that one or more data field(s) of the word has a value other than the "No Statement" or "No Data" value.

5.7.1.1 REDUNDANT TRANSMISSION EXAMPLE

Assume a requirement for a JU to transmit a particular message three times, i.e., initially and then two subsequent transmissions, at nominal 12 second intervals. Table 5.7-2 shows that a 12 second interval is equal to 1,536 time slots and may be defined by an RRN equal to 6. The transmission rule for that message, then, would read "This message shall be transmitted three times at an RRN equal to 6 (12 seconds, 8-20 second interval)." The transmission requirement is superimposed on the time slot assignment for the channel on which the message is to be transmitted. The initial transmission

of the message occurs at the JU's first transmit opportunity, e.g., time slot I and the subsequent transmissions nominally occur in time slots I plus 1536 and I plus 3072. If the initial transmission occurred in time slot A264 and the time slot assignment for the channel was 0 which indicates the initial time slot in the A set, and RRN equal to 12 (RRN), then the second transmission would nominally occur in time slot A1800, and the third transmission would nominally occur in time slot A3336.

TABLE 5.7-2. Time Slot Block Assignments/Recurrence Rate Number

1 RECURRENCE RATE NUMBER (RRN)	2 NUMBER OF AVAILABLE TIME SLOTS PER EPOCH	3 INTERVAL BETWEEN TIME SLOTS ($3 \times 2^{15-RRN}$)	4 TIME INTERVAL BETWEEN TIME SLOTS (7.8125 MILLISECS X COL 3)	5 TOLERANCE INTERVAL	6 TIME SLOTS PER UNIT TIME
0	1	98,304	12.8 MIN	9.6-12.8 MIN	0.078125/MIN
1	2	49,152	6.4 MIN	4.8-8 MIN	0.15625/MIN
2	4	24,576	3.2 MIN	2.4-4 MIN	0.3125/MIN
3	8	12,288	1.6 MIN	1.2-2 MIN	0.625/MIN
4	16	6,144	48 SECS	36-60 SECS	1.25/MIN
5	32	3,072	24 SECS	18-30 SECS	2.5/MIN
6	64	1,536	12 SECS	8-20 SECS	5/MIN
7	128	768	6 SECS	3-9 SECS	10/MIN
8	256	384	3 SECS	2-4 SECS	20/MIN
9	512	192	1.5 SECS	1-2 SECS	40/MIN
10	1024	96	750 MSECS	500-1000 MSECS	1.333/SEC
11	2048	48	375 MSECS	250-500 MSECS	2.667/SEC
12	4096	24	187.5 MSECS	125-250 MSECS	5.333/SEC
13	8192	12	93.75 MSECS	62-125 MSECS	10.667/SEC
14	16384	6	46.875 MSECS	31-62 MSECS	21.333/SEC
15	32768	3	23.4375 MSECS	15-31 MSECS	42.667/SEC

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

5.8 MESSAGE PRIORITIES

Link 16 messages transmitted by the JTIDS/MIDS terminal are generated both by the terminal and by the host unit's TDS. Both of these sources generate certain messages in accordance with specific transmission rules. In the event that there are more messages eligible for transmission than can be accommodated within an allocated time slot, a priority scheme is required. Accordingly, the message priority scheme contained in this subsection identifies the required order in which the Link 16 messages are transmitted if the priority scheme is invoked. Included are the message priority requirements for the Link 16 interface and a description of time slots which require special consideration due to unique time slot utilization by the terminal.

5.8.1 SPECIAL TIME SLOT UTILIZATION

The following messages shall be transmitted by the terminal without consideration to a priority process because of predefined time slot allocation considerations:

- a. Machine receipt messages which are generated by the terminal have the time slots specified in the original message and must be returned in the time slot specified.
- b. RTT Reply messages are transmitted in the same time slot as the RTT Interrogation message.
- c. Required Initial Entry and Network Time Update messages are transmitted exclusively in the first time slot of every 12-second interval, i.e., in set A at RRN equal to 6.
- d. PPLI and Platform and System Status messages shall be transmitted either in Dedicated Access mode time slots, except for time slots that may be preempted by RTT Interrogation - Addressed messages, or in Contention Access mode time slots.
- e. Free text messages shall be transmitted in time slots specifically assigned to support free text requirements.

- f. Relayed message - TBD.
- g. Test messages - TBD.
- h. Time slot 36766A shall be reserved for terminal self testing.
- i. Voice messages - TBD.

5.8.2 LINK 16 MESSAGE PRIORITY SCHEME

The terminal considers a number of items in order to ascertain which message shall be transmitted in a given time slot. These items include the access mode, the Network PG (Network Management, RTT, PPLI-A, PPLI-B, etc.), message type, the special considerations listed in paragraph 5.8.1, and the Link 16 priority scheme. The Link 16 message priority scheme defines the message precedence to be used when there are more messages eligible for transmission than can be accommodated within allocated time slots.

The Link 16 message priority scheme consists of a message priority precedence indicator for each message. The precedence indicator is defined as two levels, priority and routine. All priority messages will be transmitted before routine messages.

a. Priority Messages:

(1) Messages generated by the TDS which require that a machine receipt message be returned.

(2) Initial transmission of messages with the Emergency Indicator and Force Tell Indicator set.

(3) Threat warning reports such as initial reports of a confirmed hostile, torpedo alert, high speed screw, initial bearing reports, initial Ballistic Missile Report, etc.

(4) Responses to a J7.1 (ACT = 1) Data Update Request by Track Number or to a J7.1 (ACT = 2) Ballistic Missile Update Request message.

MIL-STD-6016B

(5) Engagement status reports, both initially and upon changes in status.

(6) PPLI messages generated by the TDS for use in the Surveillance Network PG when required.

(7) Correlation messages.

All messages within this grouping shall be transmitted in the order generated, i.e., first-in/first-out (FIFO).

b. Routine: All other messages are transmitted in the order generated.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

5.9 HOST INITIALIZATION VARIABLE PARAMETERS

Certain data and/or parameters within algorithms are variable. The parameter to be used will be disseminated via the OPTASK LINK. In the absence of direction from the OPTASK LINK, the default value shall be used. Several variable parameters are stated using the form $a(b-c,d)$, where a is equal to the default value, b and c are equal to the lower and upper bounds of the variable, and d is equal to the increments by which the parameter may be changed. Some examples are the Δt used in the Ballistic Missile Track Quality algorithm and the variable TQ value for Ballistic Missile Reporting Responsibility rules. An example of variable parameters not stated using the $a(b-c,d)$ form is the Operational Commander defined values.

5.10 J-SERIES MESSAGE AND WORD DESCRIPTIONS

The J-Series message and word descriptions are contained in three separate volumes as part of MIL-STD-6016 as follows:

- a. Volume 5, Part 1 of 3, contains messages J0 through J6.
- b. Volume 5, Part 2 of 3, contains messages J7 through J12.
- c. Volume 5, Part 3 of 3, contains messages J13 through RTT.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

TABLE J0-1. J0 System Information Exchange and Network Management Word Applicability Table

INITIAL WORD	SUBLABEL							
	J0.0I INITIAL ENTRY	J0.1I TEST	J0.2I NETWORK TIME UPDATE	J0.3I TIME SLOT ASSIGNMENT	J0.4I RADIO RELAY CONTROL	J0.5I REPROMULGATION RELAY	J0.6I COMMUNICATIONS CONTROL	J0.7I TIME SLOT REALLOCATION
EXTENSION WORD - 0	J0.0E0	J0.1E0		J0.3E0	J0.4E0			J0.7E0
CONTINUATION WORD - 0								
1	J0.0C1 MODE 4			J0.3C1 TIME SLOT ASSIGNMENT	J0.4C1 RADIO RELAY CONTROL		J0.6C1 TIME SLOT BLOCKS ASSIGNMENT/ DEASSIGNMENT	
2				J0.3C2 TIME SLOT ASSIGNMENT WORD 2	J0.4C2 RADIO RELAY CONTROL WORD 2		J0.6C2 NET STATUS NEEDLINE PG STATUS	
3							J0.6C3 CRYPTOVARIABLE LOGICAL LABEL	
4							J0.6C4 NET NUMBER	
.....								
21		J0.1C21 TEST						
.....								
31								

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

J0.0 MESSAGE SUMMARY

PURPOSE

The J0.0 Initial Entry message provides the data elements, in a known time slot, required for network entry.

DATA ELEMENT SUMMARY

<u>J0.0I</u>		<u>J0.0C1 (Continued)</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	SPARE	10
LABEL, J-SERIES	5	TIME SLOT SET, CURRENT	2
SUBLABEL, J-SERIES	3	TIME SLOT NUMBER, CURRENT	15
MESSAGE LENGTH INDICATOR	3	EPOCH COUNT CURRENT	7
SPARE	3	SPARE	29
DISUSED	7		
RTT REPLY STATUS INDICATOR	1		
SLOT ASSIGN INDEX NUMBER	4		
TIME QUALITY	4		
RECURRENCE RATE, VOICE A	4		
TIME SLOT SET, VOICE A	2		
TIME SLOT NUMBER, VOICE A	4		
OFFSET, VOICE B	5		
RECURRENCE RATE, RTT-B	4		
TIME SLOT SET, RTT-B	2		
TIME SLOT NUMBER, RTT-B	5		
ACCESS RATE, RTT-B	4		
ACCESS RATE, PPLI B	4		
SPARE	4		

<u>J0.0E0</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
RECURRENCE RATE, PPLI A	4
TIME SLOT SET, PPLI A	2
TIME SLOT NUMBER, PPLI A	7
RELAY DELAY, PPLI A	5
RECURRENCE RATE, PPLI B 1	4
TIME SLOT SET, PPLI B 1	2
TIME SLOT NUMBER, PPLI B 1	7
RECURRENCE RATE, PPLI B 2	4
TIME SLOT SET, PPLI B 2	2
TIME SLOT NUMBER, PPLI B 2	7
RECURRENCE RATE, CONTROL	4
TIME SLOT SET, CONTROL	2
TIME SLOT NUMBER, CONTROL	7
RELAY DELAY, CONTROL	5
ACCESS RATE, PPLI A	4
SPARE	2

<u>J0.0C1</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
CONTINUATION WORD LABEL	5

MIL-STD-6016B

J0.0 TRANSMIT/RECEIVE RULES

TITLE: Initial Entry Message

TRANSMIT RULES

When the J0.0 Initial Entry message is used in JTIDS/MIDS Communication Mode 1 for transmitting PPLI and/or control time slots, the J0.0 message consists of the J0.0I Initial Entry initial word and the J0.0E0 Initial Entry extension word. When the J0.0 message is used in JTIDS/MIDS Communication Mode 2, the J0.0 message consists of only the J0.0I word. When the J0.0 message is used in JTIDS/MIDS Communication Mode 4, the J0.0 message consists of the J0.0I word and the J0.0CI Mode 4 continuation word. The transmit rules listed below remain unchanged regardless of the mode:

- a. The J0.0 message shall be transmitted by the NTR at a RRN = 6 referenced to time slot A0.
- b. When in Communication Mode 1, the J0.0 message shall also be transmitted by all active relays and by other terminals as designated in the Initial Entry Network PG using the Contention Access Mode with an access rate of once per 24 seconds.
- c. The J0.0 message shall be transmitted using the Type 1 Standard Full Slot Message Structure.
- d. A terminal shall transmit the J0.0 message only when operating in the Normal Transmit Mode.
- e. When a JU responsible for network management is not also the NTR and desires to change the contention access time slot assignment specified in the J0.0 message, the responsible JU shall set the time slot fields, increment the Slot Assignment Index Number (SAI NUM) and send the J0.0 message in an appropriate time slot set other than the initial entry set at a rate as close as possible to a RRN = 6 until the responsible JU detects the transmission of the new network management contention access time slot assignment in the initial entry time slot set.

J0.0 TRANSMIT/RECEIVE RULES (Continued)

RECEIVE RULES

1. When a J0.0 message is received in an initial entry time slot, a terminal shall update its current network management contention access time slot assignments and the SAI NUM if its value = 0, or if it is greater than the currently held value. The latest updated SAI NUM and time slot assignments shall be used for a terminal's own transmit/receive operations and for transmission in its J0.0 message when required.
2. When a J0.0 message is received by the NTR in a time slot other than an initial entry time slot, the NTR shall perform the updates specified in Receive Rule 1 and begin transmitting the new values in the J0.0 message in the initial entry time slot set. All other terminals shall not process the J0.0 message in time slot sets other than the initial entry time slot set.

.....

WORD TITLE: INITIAL ENTRY INITIAL WORD

	24:	23:	22	21	20	19	18	17	16:	15	14	13:	12	11	10:	09	08	07:	06	05	04	03	02:	01	00:
<---	:	:							:			:	MESSAGE			SUBLABEL,	:						:	WORD	:
RRS:					DISUSED				:		SPARE	:	LENGTH			J-SERIES	:				LABEL, J-SERIES	:	FORMAT	:	
	:	:							:			:	INDICATOR				:						:		:
	:	1	:			7			:		3	:		3	:		3	:			5		:	2	:

49	48	47:	46	45	44	43	42:	41	40	39	38:	37	36:	35	34	33	32:	31	30	29	28:	27	26	25	
RECURRENT RATE		RTT-B		OFFSET		VOICE B		NUMBER		VOICE A		TSS		V-A		RATE		VOICE A		TIME QUALITY		SLOT ASSIGN INDEX		NUMBER	
4		:		5		:		4		:		2		:		4		:		4		:		4	

:	69	68	67	66:	65	64	63	62:	61	60	59	58:	57	56	55	54	53:	52	51:	50	
:				:	ACCESS RATE,			:	ACCESS RATE,			:	TIME SLOT NUMBER,			:				:	
:	SPARE			:	PPLI B			:	RTT-B			:	RTT-B			:	TSS RTT			:	----
:				:				:				:				:				:	
:	4			:	4			:	4			:	5			:	2			:	

WORD DESCRIPTION

WORD NUMBER: J0.0I

WORD TITLE: INITIAL ENTRY INITIAL WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	00
270	004	LABEL, J-SERIES	2-	6 5	00000
271	005	SUBLABEL, J-SERIES	7-	9 3	000
800	001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
756	003	SPARE	13-	15 3	
758	007	DISUSED	16-	22 7	
274	001	RTT REPLY STATUS INDICATOR (RRS)	23	1	
1552	001	SLOT ASSIGN INDEX NUMBER (SAI NUM)	24-	27 4	
279	001	TIME QUALITY	28-	31 4	
444	015	RECURRENCE RATE, VOICE A	32-	35 4	
847	017	TIME SLOT SET, VOICE A (TSS V-A)	36-	37 2	
441	032	TIME SLOT NUMBER, VOICE A	38-	41 4	
843	005	OFFSET, VOICE B	42-	46 5	
444	014	RECURRENCE RATE, RTT-B	47-	50 4	SAME CODING AS FOR BITS 32-35.
847	016	TIME SLOT SET, RTT-B (TSS RTT)	51-	52 2	SAME CODING AS FOR BITS 36 AND 37.
441	031	TIME SLOT NUMBER, RTT-B	53-	57 5	
1772	002	ACCESS RATE, RTT-B	58-	61 4	
1772	004	ACCESS RATE, PPLI B	62-	65 4	SAME CODING AS FOR BITS 58-61.
756	004	SPARE	66-	69 4	

FIELD CODING FOR J0.0I					(SHEET 1)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION	
274	001	RTT REPLY STATUS INDICATOR -----		CONVEYS THE STATUS OF A TERMINAL'S RTT REPLY FUNCTION.	
		RTT REPLY FUNCTION	0		
		NORMAL RTT REPLY FUNCTION NOT OPERATIONAL	1		
1552	001	SLOT ASSIGN INDEX NUMBER -----		CURRENT ASSIGNMENT INDEX NUMBER IN 1 NUMBER INCREMENTS.	
		SLOT ASSIGN INDEX NUMBER	0 THROUGH 15		
279	001	TIME QUALITY -----		THE QUALITY IS STATED AS A NUMERICAL VALUE FROM 0 TO 15 WHERE THE HIGHER VALUES INDICATE THE HIGHER QUALITIES. QUALITY 0 IS NOT TO BE USED FOR SYNCHRONIZATION OR THE RELATIVE NAVIGATION FUNCTION.	
		> 18080 NANOSECONDS	0		
		< OR = 18080 NANOSECONDS	1		
		< OR = 9040 NANOSECONDS	2		
		< OR = 4520 NANOSECONDS	3		
		< OR = 2260 NANOSECONDS	4		
		< OR = 1600 NANOSECONDS	5		
		< OR = 1130 NANOSECONDS	6		
		< OR = 800 NANOSECONDS	7		
		< OR = 565 NANOSECONDS	8		
		< OR = 400 NANOSECONDS	9		
		< OR = 282 NANOSECONDS	10		
		< OR = 200 NANOSECONDS	11		
		< OR = 141 NANOSECONDS	12		
		< OR = 100 NANOSECONDS	13		
		< OR = 71 NANOSECONDS	14		
		NET TIME REFERENCE	15		
444	015	RECURRENCE RATE, VOICE A -----		EXPRESSES A NUMBER 'N' WHICH, AS PART OF A TIME SLOT ASSIGNMENT, ESTABLISHES THE NUMBER OF ASSIGNED TIME SLOTS SPACED UNIFORMLY OVER EACH EPOCH.	
		1 TIME SLOT PER EPOCH	0		
		2 THROUGH 32,768 TIME SLOTS PER EPOCH	1 THROUGH 15		
				EXPRESSED AS A POWER OF 2, I.E. BIT CODE 1=2 TO THE FIRST POWER, BIT CODE 2=2 TO THE SECOND POWER, ETC.	

FIELD CODING FOR J0.01					(SHEET 2)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION	
847	017	TIME SLOT SET, VOICE A -----			
		NO STATEMENT	0		SPECIFIES THE SET OF TIME SLOTS AS SLOTS A, B, OR C EACH CONSISTING OF 32,768 TIME SLOTS PER EPOCH. WHEN THE TIME SLOT SET FIELD FOR A TIME SLOT BLOCK ASSIGNMENT IS SET TO NO STATEMENT, THE ENTIRE TIME SLOT BLOCK ASSIGNMENT WILL BE INTERPRETED AS NO STATEMENT.
		SET A	1		
		SET B	2		
		SET C	3		
441	032	TIME SLOT NUMBER, VOICE A -----			
		NUMERIC	0 THROUGH 15		SPECIFIES THE INDEX NUMBER OF THE VOICE A TIME SLOT ASSIGNMENT, WHICH MUST INCLUDE ONE OF THE FIRST 48 TIME SLOTS IN THE EPOCH IN THE BLOCK. IN 1 NUMBER INCREMENTS.
843	005	OFFSET, VOICE B -----			
		NO STATEMENT	0		
		1 THROUGH 31 TIME SLOTS	1 THROUGH 31		SPECIFIES THE DELAY IN TIME SLOTS BETWEEN THE VOICE A PARTICIPATION GROUP TIME SLOTS AND ITS CORRESPONDING VOICE B PARTICIPATION GROUP TIME SLOTS. IN ONE TIME SLOT INCREMENTS.
441	031	TIME SLOT NUMBER, RTT-B -----			
		NUMERIC	0 THROUGH 31		SPECIFIES THE INDEX NUMBER OF THE RTT-B TIME SLOT ASSIGNMENT, WHICH MUST INCLUDE ONE OF THE FIRST 96 SLOTS IN THE EPOCH IN THE BLOCK. IN 1 NUMBER INCREMENTS.
1772	002	ACCESS RATE, RTT-B -----			
		CONTENTION ACCESS MODE/ RATE, 1	0		ONE TRANSMISSION PER 48 SECONDS.
		CONTENTION ACCESS MODE/ RATE, 2	1		TWO TRANSMISSIONS PER 48 SECONDS.
		CONTENTION ACCESS MODE/ RATE, 3	2		THREE TRANSMISSIONS PER 48 SECONDS.
		CONTENTION ACCESS MODE/ RATE, 4	3		TWO TRANSMISSIONS PER 24 SECONDS.
		CONTENTION ACCESS MODE/ RATE, 5	4		THREE TRANSMISSIONS PER 24 SECONDS.

FIELD CODING FOR J0.0I					(SHEET 3)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION	
1772	002	ACCESS RATE, RTT-B	(CONTINUED)		

		CONTENTION ACCESS MODE/ RATE, 6	5	TWO TRANSMISSIONS PER 12 SECONDS.	
		CONTENTION ACCESS MODE/ RATE, 7	6	THREE TRANSMISSIONS PER 12 SECONDS.	
		CONTENTION ACCESS MODE/ RATE, 8	7	FOUR TRANSMISSIONS PER 12 SECONDS.	
		CONTENTION ACCESS MODE/ RATE, 9	8	SIX TRANSMISSIONS PER 12 SECONDS.	
		CONTENTION ACCESS MODE/ RATE, 10	9	EIGHT TRANSMISSIONS PER 12 SECONDS.	
		CONTENTION ACCESS MODE/ RATE, 11	10	12 TRANSMISSIONS PER 12 SECONDS.	
		CONTENTION ACCESS MODE/ RATE, 12	11	16 TRANSMISSIONS PER 12 SECONDS.	
		CONTENTION ACCESS MODE/ RATE, 13	12	20 TRANSMISSIONS PER 12 SECONDS.	
		CONTENTION ACCESS MODE/ RATE, 14	13	26 TRANSMISSIONS PER 12 SECONDS.	
		CONTENTION ACCESS MODE/ RATE, 15	14	32 TRANSMISSIONS PER 12 SECONDS.	
		CONTENTION ACCESS MODE/ RATE, 16	15	64 TRANSMISSIONS PER 12 SECONDS.	

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J0.0E0

WORD TITLE: INITIAL ENTRY EXTENSION WORD

24:	23	22	21	20:	19	18	17	16	15:	14	13	12	11	10	09	08:	07	06:	05	04	03	02:	01	00:		
: RECURRENCE				:	:				:	:				:	:				:	: RECURRENCE				:	: WORD	
<---:RATE, PPLI B 1				:	:RELAY DELAY, PPLI A:				:	: TIME SLOT NUMBER, PPLI A				:	:TSS PA				:	: RATE, PPLI A				:	:FORMAT	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:	:				:	:				:	:	
:				:	:				:	:				:												

WORD DESCRIPTION

WORD NUMBER: J0.0E0

WORD TITLE: INITIAL ENTRY EXTENSION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550 001		WORD FORMAT	0-	1 2	10
444 016		RECURRENCE RATE, PPLI A	2-	5 4	
847 018		TIME SLOT SET, PPLI A (TSS PA)	6-	7 2	
441 033		TIME SLOT NUMBER, PPLI A	8-	14 7	
843 006		RELAY DELAY, PPLI A	15-	19 5	
444 017		RECURRENCE RATE, PPLI B 1	20-	23 4	SAME CODING AS FOR BITS 2-5.
847 019		TIME SLOT SET, PPLI B 1 (TSS PB1)	24-	25 2	SAME CODING AS FOR BITS 6 AND 7.
441 034		TIME SLOT NUMBER, PPLI B 1	26-	32 7	SAME CODING AS FOR BITS 8-14.
444 018		RECURRENCE RATE, PPLI B 2	33-	36 4	SAME CODING AS FOR BITS 2-5.
847 020		TIME SLOT SET, PPLI B 2 (TSS PB2)	37-	38 2	SAME CODING AS FOR BITS 6 AND 7.
441 035		TIME SLOT NUMBER, PPLI B 2	39-	45 7	SAME CODING AS FOR BITS 8-14.
444 019		RECURRENCE RATE, CONTROL	46-	49 4	SAME CODING AS FOR BITS 2-5.
847 021		TIME SLOT SET, CONTROL (TSS CNT)	50-	51 2	SAME CODING AS FOR BITS 6 AND 7.
441 036		TIME SLOT NUMBER, CONTROL	52-	58 7	SAME CODING AS FOR BITS 8-14.
843 007		RELAY DELAY, CONTROL	59-	63 5	SAME CODING AS FOR BITS 15-19.
1772 003		ACCESS RATE, PPLI A	64-	67 4	
756 002		SPARE (SP)	68-	69 2	

FIELD CODING FOR J0.0E0

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
444	016	RECURRENCE RATE, PPLI A -----		EXPRESSES A NUMBER 'N' WHICH, AS PART OF A TIME SLOT ASSIGNMENT, ESTABLISHES THE NUMBER OF ASSIGNED TIME SLOTS SPACED UNIFORMLY OVER EACH EPOCH.
		1 TIME SLOT PER EPOCH	0	
		2 THROUGH 32,768 TIME SLOTS PER EPOCH	1 THROUGH 15	EXPRESSED AS A POWER OF 2, I.E. BIT CODE 1=2 TO THE FIRST POWER, BIT CODE 2=2 TO THE SECOND POWER, ETC.
847	018	TIME SLOT SET, PPLI A -----		SPECIFIES THE SET OF TIME SLOTS AS SLOTS A, B, OR C EACH CONSISTING OF 32,768 TIME SLOTS PER EPOCH.
		NO STATEMENT	0	WHEN THE TIME SLOT SET FIELD FOR A TIME SLOT BLOCK ASSIGNMENT IS SET TO NO STATEMENT, THE ENTIRE TIME SLOT BLOCK ASSIGNMENT WILL BE INTERPRETED AS NO STATEMENT.
		SET A	1	
		SET B	2	
		SET C	3	
441	033	TIME SLOT NUMBER, PPLI A -----		
		NUMERIC	0 THROUGH 127	IN 1 NUMBER INCREMENTS.
843	006	RELAY DELAY, PPLI A -----		SPECIFIES THE DELAY IN TIME SLOTS BETWEEN THE TIME SLOT DURING WHICH AN ORIGINAL MESSAGE IS RECEIVED AND THE TIME SLOT IN WHICH IT IS TO BE RELAYED.
		NO STATEMENT	0	
		ILLEGAL	1 THROUGH 5	
		6 THROUGH 31 TIME SLOTS	6 THROUGH 31	IN ONE TIME SLOT INCREMENTS.
1772	003	ACCESS RATE, PPLI A -----		
		CONTENTION ACCESS MODE/ RATE, 1	0	ONE TRANSMISSION PER 48 SECONDS.
		CONTENTION ACCESS MODE/ RATE, 2	1	TWO TRANSMISSIONS PER 48 SECONDS.
		CONTENTION ACCESS MODE/ RATE, 3	2	THREE TRANSMISSIONS PER 48 SECONDS.
		CONTENTION ACCESS MODE/ RATE, 4	3	TWO TRANSMISSIONS PER 24 SECONDS.

FIELD CODING FOR J0.0E0

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1772	003	ACCESS RATE, PPLI A -----	(CONTINUED)	
		CONTENTION ACCESS MODE/ RATE, 5	4	THREE TRANSMISSIONS PER 24 SECONDS.
		CONTENTION ACCESS MODE/ RATE, 6	5	TWO TRANSMISSIONS PER 12 SECONDS.
		CONTENTION ACCESS MODE/ RATE, 7	6	THREE TRANSMISSIONS PER 12 SECONDS.
		CONTENTION ACCESS MODE/ RATE, 8	7	FOUR TRANSMISSIONS PER 12 SECONDS.
		CONTENTION ACCESS MODE/ RATE, 9	8	SIX TRANSMISSIONS PER 12 SECONDS.
		CONTENTION ACCESS MODE/ RATE, 10	9	EIGHT TRANSMISSIONS PER 12 SECONDS.
		CONTENTION ACCESS MODE/ RATE, 11	10	12 TRANSMISSIONS PER 12 SECONDS.
		CONTENTION ACCESS MODE/ RATE, 12	11	16 TRANSMISSIONS PER 12 SECONDS.
		CONTENTION ACCESS MODE/ RATE, 13	12	20 TRANSMISSIONS PER 12 SECONDS.
		CONTENTION ACCESS MODE/ RATE, 14	13	26 TRANSMISSIONS PER 12 SECONDS.
		CONTENTION ACCESS MODE/ RATE, 15	14	32 TRANSMISSIONS PER 12 SECONDS.
		CONTENTION ACCESS MODE/ RATE, 16	15	64 TRANSMISSIONS PER 12 SECONDS.

.....

WORD TITLE: MODE 4 CONTINUATION WORD

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
									:								:							
<---									:	EPOCH COUNT CURRENT							:	TIME SLOT NUMBER, CURRENT						
									:								:							
									:	7							:	15						

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50
:																				
:																				
:											SPARE									
:																				
:											29									

WORD DESCRIPTION

WORD NUMBER: J0.0C1
WORD TITLE: MODE 4 CONTINUATION WORD

REFERENCE		BIT #		RESOLUTION, CODING, ETC
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	00001
756 010	SPARE	7-	16 10	
847 012	TIME SLOT SET, CURRENT (TSS CUR)	17-	18 2	
441 010	TIME SLOT NUMBER, CURRENT	19-	33 15	
448 002	EPOCH COUNT CURRENT	34-	40 7	
756 029	SPARE	41-	69 29	

FIELD CODING FOR J0.0C1

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
847	012	TIME SLOT SET, CURRENT -----		SPECIFIES THE SET OF TIME SLOTS AS SLOTS A, B, OR C EACH CONSISTING OF 32,768 TIME SLOTS PER EPOCH.
		NO STATEMENT	0	WHEN THE TIME SLOT SET FIELD FOR A TIME SLOT BLOCK ASSIGNMENT IS SET TO NO STATEMENT, THE ENTIRE TIME SLOT BLOCK ASSIGNMENT WILL BE INTERPRETED AS NO STATEMENT.
		SET A	1	
		SET B	2	
		SET C	3	
441	010	TIME SLOT NUMBER, CURRENT -----		
		NUMERIC	0 THROUGH 32767	IN 1 NUMBER INCREMENTS.
448	002	EPOCH COUNT CURRENT -----		SPECIFIES THE EPOCH NUMBER WITHIN A 24 HOUR DAY WHERE AN EPOCH IS A 12.8 MINUTE INTERVAL, AND, THEREFORE, THERE ARE 112.5 EPOCHS PER DAY.
		EPOCH NUMBER	0 THROUGH 111	IN 1 EPOCH INCREMENTS.
		ILLEGAL	112 THROUGH 126	
		NO STATEMENT	127	

MIL-STD-6016B

J0.1 MESSAGE SUMMARY

PURPOSE

The J0.1 Test message is used for terminal test and performance evaluation.

DATA ELEMENT SUMMARY

<u>J0.1I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
SPARE	57

<u>J0.1E0</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
TEST PATTERN	68

<u>J0.1C21</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
CONTINUATION WORD LABEL	5
TEST PATTERN, 1	63

MIL-STD-6016B

J0.1 TRANSMIT/RECEIVE RULES

TITLE: Test Message

TRANSMIT RULES

1. The J0.1 Test message may be transmitted by any terminal.
2. The J0.1 message may be transmitted in one of the following operator-selectable modes:
 - a. If set to Test Mode 1, in all transmit time slots assigned the dedicated access mode and in all time slots that would ordinarily be used for the contention access mode except for initial entry time slots and RTT time slots.
 - b. If set to Test Mode 2, in all dedicated access time slots that are not used to transmit other messages except for common blocks assigned to the Control and Voice PGs.
3. If set to operate in the Normal or Polling Mode, a terminal shall automatically transmit a single J0.1 message at the first opportunity in response to the receipt of a J0.6 Communications Control message addressed to that terminal and requesting such response.

RECEIVE RULES

There are no receive rules specified for this message.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J0.1I

WORD TITLE: TEST INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00			
												:	MESSAGE	:	SUBLABEL,	:									:	WORD	:
<---												:	LENGTH	:	J-SERIES	:	LABEL, J-SERIES				:	FORMAT	:				
												:	INDICATOR	:									:				
												:	3	:	3	:	5				:	2	:				

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

SPARE

57

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50
:																				
:																				
:																				
:																				

--->

WORD DESCRIPTION

WORD NUMBER: J0.1I

WORD TITLE: TEST INITIAL WORD

REFERENCE		BIT #		RESOLUTION, CODING, ETC
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	
1550 001	WORD FORMAT	0-	1 2	00
270 004	LABEL, J-SERIES	2-	6 5	00000
271 005	SUBLABEL, J-SERIES	7-	9 3	001
800 001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
756 057	SPARE	13-	69 57	

WORD MAP

WORD NUMBER: J0.1E0

WORD TITLE: TEST EXTENSION WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00	:
																									: WORD :
<---																									: FORMAT :
																									: :
																									: 2 :

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

TEST PATTERN

68																								
:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50				
:																								
:																								
:																								
:																								
:																								

WORD DESCRIPTION

WORD NUMBER: J0.1E0
WORD TITLE: TEST EXTENSION WORD

REFERENCE		BIT #		RESOLUTION, CODING, ETC
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	
1550 001	WORD FORMAT	0-	1 2	10
445 004	TEST PATTERN	2-	69 68	

FIELD CODING FOR J0.1E0 (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
445	004	TEST PATTERN ----- TEST PATTERN		ALTERNATING ZEROES AND ONES BEGIN- NING WITH ZERO IN BIT NUMBER 02. SEE DUI EXPLANATION.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J0.1C21
WORD TITLE: TEST CONTINUATION WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00	:		
																	CONTINUATION WORD		WORD						:		
<---																	:	LABEL		:	FORMAT						:
																	:	5		:	2						:

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

TEST PATTERN, 1

63																							
:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50			
:																							
:																							
:																							
:																							

--->

WORD DESCRIPTION

WORD NUMBER: J0.1C21

WORD TITLE: TEST CONTINUATION WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	10101
445 005	TEST PATTERN, 1	7-	69 63	

FIELD CODING FOR J0.1C21 (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
445	005	TEST PATTERN, 1 ----- TEST PATTERN		ALTERNATING ZEROES AND ONES BEGIN- NING WITH ZERO IN BIT NUMBER 07. SEE DUI EXPLANATION.

MIL-STD-6016B

J0.2 MESSAGE SUMMARY

PURPOSE

The J0.2 Network Time Update message adjusts the system time to a standard time.

DATA ELEMENT SUMMARY

<u>J0.2I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
SPARE	3
EPOCH NUMBER, EXECUTION	7
EPOCH SUBDIVISION, EXECUTION	6
EPOCH NUMBER, DELTA CHANGE	2
TIME SLOT NUMBER, NEW	15
TIME SLOT SET, NEW	2
RESIDUAL TIME CHANGE	18
SPARE	4

MIL-STD-6016B

J0.2 TRANSMIT/RECEIVE RULES

TITLE: Network Time Update Message

TRANSMIT RULES

1. The NTR shall transmit the J0.2 Network Time Update message following the J0.0 Initial Entry message in the same time slot until the execution time stated in the J0.2 message is reached.
2. Upon receipt of the J0.2 message, those JUs designated to transmit the J0.0 message shall also transmit the J0.2 message following the J0.0 message in the same time slot until the execution time stated in the J0.2 message is reached.

RECEIVE RULES

1. All JUs required to transmit the J0.0 message shall receive the J0.2 message and retain it for transmission in accordance with Transmit Rule 2.
2. All JUs participating in the network shall receive the J0.2 message and shall execute the required Network Time Update at the time specified in the message.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: NETWORK TIME UPDATE INITIAL WORD

49	48:	47	46:	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31:	30	29:	28	27	26	25
<---	:		:															:		:				
	:	TSS	:	NEW														:		:				
	:		:															:		:				
	:	2	:															:	2	:				6

:	69	68	67	66:	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50
:					:															
:	SPARE				:	RESIDUAL TIME CHANGE														
:					:															
:	4				:	18														

WORD DESCRIPTION

WORD NUMBER: J0.2I

WORD TITLE: NETWORK TIME UPDATE INITIAL WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	00
270 004	LABEL, J-SERIES	2-	6 5	00000
271 005	SUBLABEL, J-SERIES	7-	9 3	010
800 001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
756 003	SPARE	13-	15 3	
1539 001	EPOCH NUMBER, EXECUTION	16-	22 7	
755 002	EPOCH SUBDIVISION, EXECUTION	23-	28 6	
1615 007	EPOCH NUMBER, DELTA CHANGE (EPN DCH)	29-	30 2	
441 040	TIME SLOT NUMBER, NEW	31-	45 15	
847 002	TIME SLOT SET, NEW (TSS NEW)	46-	47 2	
442 002	RESIDUAL TIME CHANGE	48-	65 18	
756 004	SPARE	66-	69 4	

			FIELD CODING FOR J0.2I		(SHEET 1)
DFI	DUI	DUI/DI NAME	DI BIT CODE		DUI/DI EXPLANATION
1539	001	EPOCH NUMBER, EXECUTION ----- EPOCH NUMBER ILLEGAL	0 THROUGH 112 113 THROUGH 127		SPECIFIES THE EPOCH AT WHICH THE TIME CHANGE SHALL BE MADE. IN 1 NUMBER INCREMENTS.
755	002	EPOCH SUBDIVISION, EXECUTION ----- TIME SLOT (A*N(512))	0 THROUGH 63		EPOCHS ARE DIVIDED INTO 64 EQUAL SUBDIVISIONS, NUMBERED 0 TO 63. THE ASSIGNMENT IS THE FIRST TIME SLOT OF THE SUBDIVISION INDICATED N, (I.E. TIME SLOT A*N(512), N = 0 TO 63, A = TIME SLOT SET). WHEN THE DELTA EPOCH IS EQUAL TO ZERO, THE ASSIGNMENT SHALL BE EXECUTED IMMEDIATELY. WHERE "A" IS THE TIME SLOT SET AND 'N' VARIES FROM 0-63.
1615	007	EPOCH NUMBER, DELTA CHANGE ----- NO STATEMENT DECREMENT BY 1 NO CHANGE INCREMENT BY 1	0 1 2 3		SPECIFIES THE INCREMENT BY WHICH THE EPOCH NUMBER AT THE TIME OF EXECUTION IS CHANGED.
441	040	TIME SLOT NUMBER, NEW ----- NUMERIC	0 THROUGH 32767		SPECIFIES THE NEW NUMBER OF THE TIME SLOT AT THE TIME OF EXECUTION. IN 1 NUMBER INCREMENTS.
847	002	TIME SLOT SET, NEW ----- NO STATEMENT SET A SET B SET C	0 1 2 3		SPECIFIES THE NEW SET OF THE TIME SLOT AT THE TIME OF EXECUTION. WHEN THE TIME SLOT SET FIELD FOR A TIME SLOT BLOCK ASSIGNMENT IS SET TO NO STATEMENT, THE ENTIRE TIME SLOT BLOCK ASSIGNMENT WILL BE INTERPRETED AS NO STATEMENT.
442	002	RESIDUAL TIME CHANGE -----			SPECIFIES THE ELAPSED TIME OF THE NEW TIME SLOT AT THE TIME OF EXECUTION. SPECIFIES TIME SHIFT OF THE TIME SLOT BOUNDARY AS PLUS OR MINUS

FIELD CODING FOR J0.2I					(SHEET 2)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION	
442	002	RESIDUAL TIME CHANGE -----	(CONTINUED)	3.90625 MILLISECONDS. WHEN THIS VALUE IS POSITIVE IT SPECIFIES THE ELAPSED TIME OF THE NEW TIME SLOT AT THE TIME OF EXECUTION. WHEN THIS VALUE IS NEGATIVE IT SPECIFIES THE TIME REMAINING IN THE PREVIOUS TIME SLOT AT THE TIME OF EXECUTION BEFORE THE NEW TIME SLOT BOUNDARY. IN 50 NANOSECOND INCREMENTS.	
		0 THROUGH 3.90625 MILLISECONDS ILLEGAL -3.90625 MILLISECONDS THROUGH -50 NANOSECONDS	0 THROUGH 78125 78126 THROUGH 184018 184019 THROUGH 262143		

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

J0.3 MESSAGE SUMMARY

PURPOSE

The J0.3 Time Slot Assignment message is used to permit dynamic assignment of time slots to JUs by a responsible JU.

DATA ELEMENT SUMMARY

<u>J0.3I</u>		<u>J0.3C2</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	WORD FORMAT	2
LABEL, J-SERIES	5	CONTINUATION WORD LABEL	5
SUBLABEL, J-SERIES	3	INDEX NUMBER, SET	8
MESSAGE LENGTH INDICATOR	3	ACTION CODE	4
TRACK NUMBER, ADDRESSEE	15	INDEX NUMBER, NEW SET	8
SPARE	3	SPARE	43
DELTA EPOCH	3		
EPOCH SUBDIVISION	6		
ACTION CODE, TIME SLOT ASSIGNMENT	3		
PARTICIPATION GROUP	9		
SPARE	9		
RECEIPT/COMPLIANCE	5		
RECURRENCE RATE, RECEIPT/ COMPLIANCE	4		

<u>J0.3E0</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
PARTICIPATION GROUP	9
ACCESS DESCRIPTION	6
RECURRENCE RATE	4
TIME SLOT SET	2
TIME SLOT NUMBER, INDEX	15
TIME SLOT ASSIGNMENT ACTION	1
TIME SLOT ASSIGNMENT TYPE	1
TIME SLOT ASSIGNMENT QUALIFIER	1
NET NUMBER, SPECIFIED	7
CRYPTOVARIABLE LOGICAL LABEL NUMBER ONE	7
CRYPTOMODE INDICATOR	1
CRYPTOVARIABLE LOGICAL LABEL NUMBER TWO	7
RELAY DELAY, RECEIVE 1	7

<u>J0.3C1</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
CONTINUATION WORD LABEL	5
NET NUMBER, DECRYPTION	7
NET NUMBER, RELAY	7
SPARE	49

MIL-STD-6016B

J0.3 TRANSMIT/RECEIVE RULES

TITLE: Time Slot Assignment Message

TRANSMIT RULES

1. An original J0.3 Time Slot Assignment message (R/C = 0) shall be transmitted only by a JU with responsibility for the time slots specified in the message.
2. The original J0.3 message (R/C = 0) shall have the Addressee TN field set to the single terminal to which the control action is intended.
3. Only the J0.3I Time Slot Assignment initial word is required to delete time slot assignments according to the action codes specified. If required by T/R Rule 12, a J0.3C2 continuation word shall be added.
4. One or more time slot assignments can be transmitted in a J0.3 message consisting of a J0.3I Time Slot Assignment initial word and one or more J0.3E0 Time Slot Assignment extension words and J0.3C1 Time Slot Assignment continuation words. Each time slot assignment requires one J0.3E0 extension word. If required by T/R Rule 10, a J0.3C1 continuation word shall be added. If required by T/R Rule 12, a J0.3C2 continuation word shall be added. The transmission sequence of extension and continuation words is defined in Rule 11. The J0.3I initial word can also delete assignments, as in Rule 3, when transmitted with additional extension and continuation words.
5. A value of 0 in the Relay Delay, Receive 1 field indicates that only the explicit assignment is being made. For this case, the Time Slot Assignment Qualifier field will always be set to 0 value.
6. For transmit or receive assignments in the common variable mode, a value other than 0 in the Relay Delay, Receive 1 field indicates an additional receive assignment offset from the explicit assignment by the value of the Relay Delay, Receive field. When the additional assignment is not a relay of the explicit assignment the Time Slot Assignment Qualifier field will be set to 0. When the additional assignment is a relay of the explicit assignment, the Time Slot Assignment Qualifier field will be set to 1.

J0.3 TRANSMIT/RECEIVE RULES (Continued)

TRANSMIT RULES (Continued)

7. For receive assignments in the partitioned variable mode which involve a relay, the Time Slot Assignment Qualifier field is set to 0 to indicate that the explicit assignment is for receipt of a relayed message with an end-to-end delay given in the Relay Delay, Receive 1 field. Only the explicit assignment is made.
8. For transmit assignments in the partitioned variable mode which do not involve a relay, a receive assignment for original messages is indicated by setting the Time Slot Assignment Qualifier to 0 and inserting the receive assignment offset in the Relay Delay, Receive 1 field.
9. For transmit or receive assignments in the partitioned variable mode which involve a relay, the Time Slot Assignment Qualifier field is set to 1 to indicate that the explicit assignment is for transmission or reception of original messages and the additional receive assignment is for reception of relayed messages. The Relay Delay, Receive 1 field is set to the appropriate end-to-end relay delay value.
10. The J0.3C1 Time Slot Assignment continuation word is required to assign time slot blocks for the following special cases:
 - a. The original net number must be specified for receive assignments of relayed messages in the partitioned variable mode (Time Slot Assignment Type set to Receive Time Slot Action and Time Slot Assignment Qualifier field set to 0) when the relay occurs on a different net number.
 - b. The Net Number, Relay must be specified for transmit assignments and original receive assignments that include a receive assignment for relayed messages specified by the Relay Delay, Receive 1 field and the relay occurs on a net number different from the net number specified by the Net Number, Specified field in the J0.3E0 word.
11. When more than one time slot assignment is contained in the J0.3 message, all J0.3E0 Time Slot Assignment extension words will be transmitted

J0.3 TRANSMIT/RECEIVE RULES (Continued)

TRANSMIT RULES (Continued)

immediately following the J0.3I Time Slot Assignment initial word. When one or more time slot assignments require a J0.3C1 Time Slot Assignment continuation word, then the association of a J0.3C1 continuation word with its J0.3E0 extension word shall be defined as follows: The first J0.3C1 word will be associated with the first J0.3E0 extension word; the second J0.3C1 continuation word will be associated with the second J0.3E0 extension word, etc. If required (see T/R Rule 12) the J0.3C2 continuation word shall be transmitted after all the J0.3E0 extension words and the associated J0.3C1 continuation words.

12. The J0.3C2 continuation word for set management is required in the following cases:

a. To make the time slot modification on an initialization set different than the one currently used by the addressed JU. The Set Index Number field of the J0.3C2 continuation word shall be set to the appropriate value and the other fields of the J0.3C2 to value 0.

b. To request a change order with or without start net entry. The Time Slot Assignment Action Code field of the initial word shall be set to No Statement, the Action Code field of the J0.3C2 continuation word to value 1 or 2, and no J0.3E0/J0.3C1 words are permitted.

RECEIVE RULES

1. Upon receipt of an original J0.3 message (R/C = 0), the addressed terminal shall automatically comply with the specified actions at the indicated execution time, provided that the original J0.3 message contains all legal data and that compliance with these actions will not result in an unacceptable time slot assignment status within the terminal.

2. The addressed machine receipt J0.3 message (R/C = 2) shall be transmitted in response to the receipt of an original J0.3 message (R/C = 0) only if the

J0.3 TRANSMIT/RECEIVE RULES (Continued)

RECEIVE RULES (Continued)

addressed terminal can accept and execute the actions specified in the original J0.3 message.

3. The appropriate CANTPRO J0.3 message shall be transmitted in response to the receipt of an original J0.3 message (R/C = 0) if the addressed terminal cannot accept and execute the actions specified in the original J0.3 message, either because the original J0.3 message contains erroneous data elements or processing the actions would result in an unacceptable time slot assignment status.

4. If the addressed terminal is operating in the Radio Silence Mode, it shall discard the original J0.3 message (R/C = 0) without further processing or response.

5. When the terminal receives a J0.3C2 word with Action Code set to value 1, Set Change Order ("Change the Active Set"):

- the terminal shall, at the time of execution provided, set the activity indicator for the new set index number to active and set the activity indicator for all other sets to inactive.

6. When the terminal receives a J0.3C2 word with Action Code set to value 2, Set Change Order with Start Net Entry ("Change the Active Set and Trigger Start Net Entry"):

- the terminal shall, at the time of execution provided, set the activity indicator for the new set index number to active and set the activity indicator for all other sets to inactive,

- the terminal shall perform initial entry processing (synchronization processing upon reception of J0.0).

WORD MAP

WORD NUMBER: J0.3I

WORD TITLE: TIME SLOT ASSIGNMENT INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00		
TRACK NUMBER, ADDRESSEE												:	MESSAGE	:	SUBLABEL,	:							:	WORD	:	
												:	LENGTH	:	J-SERIES	:	LABEL, J-SERIES	:	FORMAT	:		:		:		
												:	INDICATOR	:		:						:		:		
15												:	3	:	3	:	5	:	2	:		:		:		
49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25		
PARTICIPATION GROUP						:	ACT CDE	:	EPOCH SUBDIVISION	:	DELTA EPOCH	:	SPARE	:											---	
						:		:		:		:		:												
9						:	3	:	6	:	3	:	3	:												
						:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50
						:	RECURRENCE	:		:		:														
						:	RATE, RECEIPT/	:	RECEIPT/COMPLIANCE	:									SPARE	:						---
						:	COMPLIANCE	:		:		:														
						:	4	:	5	:	9	:		:		:		:		:		:		:		

WORD DESCRIPTION

WORD NUMBER: J0.3I

WORD TITLE: TIME SLOT ASSIGNMENT INITIAL WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	00
270 004	LABEL, J-SERIES	2-	6 5	00000
271 005	SUBLABEL, J-SERIES	7-	9 3	011
800 001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
769 006	TRACK NUMBER, ADDRESSEE	13-	27 15	
756 003	SPARE	28-	30 3	
1615 006	DELTA EPOCH	31-	33 3	
755 001	EPOCH SUBDIVISION	34-	39 6	
803 001	ACTION CODE, TIME SLOT ASSIGNMENT (ACT CDE)	40-	42 3	
838 004	PARTICIPATION GROUP (PTC GRP)	43-	51 9	
756 009	SPARE	52-	60 9	
392 008	RECEIPT/COMPLIANCE	61-	65 5	
444 025	RECURRENCE RATE, RECEIPT/ COMPLIANCE (RRN R/C)	66-	69 4	

			FIELD CODING FOR J0.3I	(SHEET 1)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	006	TRACK NUMBER, ADDRESSEE -----		THE TN OF A UNIT (I.E., JU OR PU) TO WHICH A MESSAGE IS ADDRESSED.
		NO STATEMENT NUMERIC	0 00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		ILLEGAL NUMERIC	00077 (OCTAL) 00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC	00177 (OCTAL)	COLLECTIVE ADDRESS.
		NUMERIC	00200 THROUGH 07776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL NUMERIC	07777 (OCTAL) 10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
1615	006	DELTA EPOCH -----		SPECIFIES THE EPOCH IN WHICH THE ADDRESSED TERMINAL SHALL EXECUTE THE ASSIGNMENT.
		CURRENT EPOCH	0	
		1 EPOCH FROM THE CURRENT EPOCH	1	
		2 EPOCHS FROM THE CURRENT EPOCH	2	
		3 EPOCHS FROM THE CURRENT EPOCH	3	
		4 EPOCHS FROM THE CURRENT EPOCH	4	
		5 EPOCHS FROM THE CURRENT EPOCH	5	
		6 EPOCHS FROM THE CURRENT EPOCH	6	
		7 EPOCHS FROM THE CURRENT EPOCH	7	

FIELD CODING FOR J0.3I

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
755	001	EPOCH SUBDIVISION -----		EPOCHS ARE DIVIDED INTO 64 EQUAL SUBDIVISIONS, NUMBERED 0 TO 63. THE ASSIGNMENT IS THE FIRST TIME SLOT OF THE SUBDIVISION INDICATED, N, (I.E. TIMESLOT A*N(512), N = 0 TO 63, A = TIME SLOT SET.) WHEN THE DELTA EPOCH IS EQUAL TO ZERO AND THE EPOCH SUBDIVISION IS EQUAL TO ZERO, THE ASSIGNMENT SHALL BE EXECUTED IMMEDIATELY.
		TIME SLOT (A*N(512))	0 THROUGH 63	WHERE "A" IS THE TIME SLOT SET AND 'N' VARIES FROM 0-63.
803	001	ACTION CODE, TIME SLOT ASSIGNMENT -----		
		NO STATEMENT	0	
		DELETE ALL	1	DELETE ALL TIME SLOT ASSIGNMENTS FOR THE PARTICIPATION GROUP INDICATED OR ALL TIME SLOT ASSIGNMENTS IF THE PARTICIPATION GROUP IS EQUAL TO NO STATEMENT.
		DELETE ALL TRANSMIT	2	DELETE ALL TRANSMIT TIME SLOT ASSIGNMENTS FOR THE PARTICIPATION GROUP INDICATED OR ALL TRANSMIT TIME SLOT ASSIGNMENTS IF THE PARTICIPATION GROUP IS EQUAL TO NO STATEMENT.
		DELETE ALL RECEIVE	3	DELETE ALL RECEIVE TIME SLOT ASSIGNMENTS FOR THE PARTICIPATION GROUP INDICATED OR ALL RECEIVE TIME SLOT ASSIGNMENTS IF THE PARTICIPATION GROUP IS EQUAL TO NO STATEMENT.
		UNDEFINED	4 THROUGH 7	
838	004	PARTICIPATION GROUP -----		SPECIFIES THE INDEX NUMBER OF THE PARTICIPATION GROUP TO WHICH AN ASSIGNED BLOCK OF TIME SLOTS APPLY.
		NO STATEMENT	0	
		INITIAL ENTRY	1	
		RTT A	2	
		RTT B	3	
		NETWORK MANAGEMENT	4	

FIELD CODING FOR J0.3I

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
838	004	PARTICIPATION GROUP	(CONTINUED)	

		PPLI AND STATUS GROUP A	5	
		PPLI AND STATUS GROUP B	6	
		SURVEILLANCE	7	
		MISSION MANAGEMENT/ WEAPONS COORDINATION	8	
		CONTROL	9	
		ELECTRONIC WARFARE	10	
		UNDEFINED	11	
		VOICE GROUP A	12	
		VOICE GROUP B	13	
		PARTICIPATION GROUPS 14 THROUGH 18	14 THROUGH 18	DEFINED BY INTERFACE OPERATING PROCEDURES AND TACTICAL COMMUNICATIONS PLAN.
		NONC2 JU-TO-NONC2 JU A	19	
		NONC2 JU-TO-NONC2 JU B	20	
		ENGAGEMENT COORDINATION	21	
		COMPOSITE A	22	
		COMPOSITE B	23	
		PARTICIPATION GROUPS 24 THROUGH 26	24 THROUGH 26	DEFINED BY INTERFACE OPERATING PROCEDURES AND TACTICAL COMMUNICATIONS PLAN.
		JOINT NET PPLI	27	
		DISTRIBUTED NETWORK MANAGEMENT	28	
		RESIDUAL MESSAGES	29	
		IJMS POSITION AND STATUS	30	
		OTHER IJMS	31	
		PARTICIPATION GROUPS 32 THROUGH 509	32 THROUGH 509	DEFINED BY INTERFACE OPERATING PROCEDURES AND TACTICAL COMMUNICATIONS PLAN.
		NET CONTROL NEEDLINE	510	
		NET STATUS NEEDLINE	511	
392	008	RECEIPT/COMPLIANCE		

		ORIGINAL ORDER	0	RECEIPT/COMPLIANCE RESPONSE REQUIRED.
		ORIGINAL ORDER	1	RECEIPT/COMPLIANCE RESPONSE NOT REQUIRED. MUST BE USED IN CONJUNCTION WITH ORIGINAL ORDER MESSAGES ADDRESSED TO COLLECTIVE ADDRESSES. THE ORIGINAL ORDER SHALL BE TRANSMITTED 3 TIMES.

		FIELD CODING FOR J0.3I		(SHEET 4)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
		MACHINE RECEIPT	2	MESSAGE RECEIVED ERROR FREE.
		WILCO (WILL COMPLY)	3	THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER WILL COMPLY. IN THIS USAGE, THE SYSTEM COMPONENT IS A HUMAN OPERATOR OR (UNMANNED VEHICLE ONLY) A MACHINE.
		HAVCO (HAVE COMPLIED)	4	THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER HAS COMPLIED. IN THIS USAGE, THE SYSTEM COMPONENT MAY BE A HUMAN OPERATOR OR A MACHINE.
		ORIGINAL ORDER	5	RECEIPT/COMPLIANCE RESPONSE (MR AND/ OR CANTPRO ONLY) REQUIRED.
		CANTCO (CANNOT COMPLY)	6	THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER CANNOT COMPLY. IN THIS USAGE, THE SYSTEM COMPONENT IS A HUMAN OPERATOR OR (UNMANNED VEHICLE ONLY) A MACHINE.
		CANTPRO (CANNOT PROCESS)	7	NON-SPECIFIC SYSTEM LIMITATION OR CONFLICT. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	8	TIME SLOT ASSIGNMENT CONFLICT DETECTED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	9	CRYPTOVARIABLE NOT HELD. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	10	PARTICIPATION GROUP NOT DEFINED. THIS IS AN AUTOMATIC COMPUTER- GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT

FIELD CODING FOR J0.3I				(SHEET 5)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
		CANTPRO (CANNOT PROCESS)	11	ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED. APPLICABLE ASSIGNMENT TABLE FULL.
		CANTPRO (CANNOT PROCESS)	12	THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED. RELAY FUNCTION SPECIFIED ALREADY HAS ASSIGNED TIME SLOT BLOCKS FOR WHICH A DIFFERENT RELAY MODE/NET NUMBER HAS BEEN SPECIFIED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	13	INTERFERENCE PROTECTION FEATURES WOULD BE VIOLATED BY ACCEPTANCE OF ASSIGNMENT. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	14	HOST SUBSCRIBER INTERFACE IS INACTIVE AND MESSAGE IS NOT PROCESSED BY THE TERMINAL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	15	TN, ADDRESSEE DOES NOT IMPLEMENT THE ACTION REQUESTED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	16	ONE OR MORE TNS IN THE OM NOT HELD.

FIELD CODING FOR J0.3I				(SHEET 6)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
		CANTPRO (CANNOT PROCESS)	17	THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	18	TN, REFERENCE OR TN, FRIENDLY WEAPON IS UNDER OWN UNIT CONTROL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	19	UNIT NOT EXERCISING AIR CONTROL CAPABILITY. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	20	UNACCEPTABLE IDENTITY. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	21	ADDRESSEE TN IS INACTIVE. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	22	THE FORWARDING UNIT DID NOT RECEIVE A MACHINE RECEIPT FROM THE ADDRESSEE TN. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
				TN, REFERENCE OR TN, FRIENDLY WEAPON IS NOT UNDER THIS UNIT'S CONTROL. THIS IS AN AUTOMATIC COMPUTER-

			FIELD CODING FOR J0.3I	(SHEET 7)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
		UNDEFINED NO STATEMENT	23 THROUGH 30 31	GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
444	025	RECURRENCE RATE, RECEIPT/ COMPLIANCE ----- NO STATEMENT NUMERIC	0 1 THROUGH 15	IDENTIFIES THE TIME SLOT IN WHICH THE RECEIPT/COMPLIANCE FOR THE MESSAGE IS TO BE TRANSMITTED. THE NUMERIC VALUE FOR RECEIPT/ COMPLIANCE, SPECIFIED AS RECURRENCE RATE NUMBER, DEFINES THE NUMBER N OF CONSECUTIVE TIME SLOTS FROM THE ORIGINAL TRANSMISSION TO THE DONATED TIME SLOT: N=3X2 TO THE (15-RRN) POWER.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: TIME SLOT ASSIGNMENT EXTENSION WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00	
<---		:	SET	:	RECURRENCE RATE			:	ACCESS DESCRIPTION					:	PARTICIPATION GROUP								:	WORD	:
		:		:				:						:									:	FORMAT	:
		:	2	:	4			:	6					:	9								:	2	:

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25				
								TSA:TSA:TSA:																				
<---	:	NET NUMBER, SPECIFIED							:	QLA	:	TYP	:	ACT	:	TIME SLOT NUMBER, INDEX												
								:	:	:	:	:																
								:	7							:	1	:	1	:	1	:	15					

:	69	68	67	66	65	64	63:	62	61	60	59	58	57	56:	55:	54	53	52	51	50			
:	RELAY DELAY, RECEIVE 1							:	CRYPTOVARIABLE LOGICAL LABEL NUMBER TWO							:	CYP:	CRYPTOVARIABLE LOGICAL LABEL NUMBER ONE					
:								:								:	MDE:						
:								:								:	:						
:	7							:	7							:	1	:	7				

WORD DESCRIPTION

WORD NUMBER: J0.3E0

WORD TITLE: TIME SLOT ASSIGNMENT EXTENSION WORD

REFERENCE			BIT	#	
DFI/DUI	DATA FIELD	DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD	FORMAT	0-	1 2	10
838 004	PARTICIPATION	GROUP (PTC GRP)	2-	10 9	
1772 001	ACCESS	DESCRIPTION	11-	16 6	
444 001	RECURRENCE	RATE	17-	20 4	
847 013	TIME SLOT	SET	21-	22 2	
441 021	TIME SLOT	NUMBER, INDEX	23-	37 15	
446 001	TIME SLOT	ASSIGNMENT ACTION	38	1	
		(TSA ACT)			
449 001	TIME SLOT	ASSIGNMENT TYPE	39	1	
		(TSA TYP)			
351 015	TIME SLOT	ASSIGNMENT QUALIFIER	40	1	
		(TSA QLA)			
348 021	NET	NUMBER, SPECIFIED	41-	47 7	
801 019	CRYPTOVARIABLE	LOGICAL LABEL	48-	54 7	
		NUMBER ONE			
802 001	CRYPTOMODE	INDICATOR (CYP MDE)	55	1	
801 020	CRYPTOVARIABLE	LOGICAL LABEL	56-	62 7	
		NUMBER TWO			
843 010	RELAY	DELAY, RECEIVE 1	63-	69 7	

FIELD CODING FOR J0.3E0

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
838	004	PARTICIPATION GROUP -----		SPECIFIES THE INDEX NUMBER OF THE PARTICIPATION GROUP TO WHICH AN ASSIGNED BLOCK OF TIME SLOTS APPLY.
		NO STATEMENT	0	
		INITIAL ENTRY	1	
		RTT A	2	
		RTT B	3	
		NETWORK MANAGEMENT	4	
		PPLI AND STATUS GROUP A	5	
		PPLI AND STATUS GROUP B	6	
		SURVEILLANCE	7	
		MISSION MANAGEMENT/ WEAPONS COORDINATION	8	
		CONTROL	9	
		ELECTRONIC WARFARE	10	
		UNDEFINED	11	
		VOICE GROUP A	12	
		VOICE GROUP B	13	
		PARTICIPATION GROUPS 14 THROUGH 18	14 THROUGH 18	DEFINED BY INTERFACE OPERATING PROCEDURES AND TACTICAL COMMUNICATIONS PLAN.
		NONC2 JU-TO-NONC2 JU A	19	
		NONC2 JU-TO-NONC2 JU B	20	
		ENGAGEMENT COORDINATION	21	
		COMPOSITE A	22	
		COMPOSITE B	23	
		PARTICIPATION GROUPS 24 THROUGH 26	24 THROUGH 26	DEFINED BY INTERFACE OPERATING PROCEDURES AND TACTICAL COMMUNICATIONS PLAN.
		JOINT NET PPLI	27	
		DISTRIBUTED NETWORK MANAGEMENT	28	
		RESIDUAL MESSAGES	29	
		IJMS POSITION AND STATUS	30	
		OTHER IJMS	31	
		PARTICIPATION GROUPS 32 THROUGH 509	32 THROUGH 509	DEFINED BY INTERFACE OPERATING PROCEDURES AND TACTICAL COMMUNICATIONS PLAN.
		NET CONTROL NEEDLINE	510	
		NET STATUS NEEDLINE	511	
1772	001	ACCESS DESCRIPTION -----		DESCRIBES THE ACCESS MODE AND ASSOCIATED PARAMETERS CONNECTED WITH THE ASSIGNMENT OF TIME SLOTS.

FIELD CODING FOR J0.3E0

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1772	001	ACCESS DESCRIPTION -----	(CONTINUED)	
		CONTENTION ACCESS MODE/ RATE, 1	0	ONE TRANSMISSION PER 48 SECONDS.
		CONTENTION ACCESS MODE/ RATE, 2	1	TWO TRANSMISSIONS PER 48 SECONDS.
		CONTENTION ACCESS MODE/ RATE, 3	2	THREE TRANSMISSIONS PER 48 SECONDS.
		CONTENTION ACCESS MODE/ RATE, 4	3	TWO TRANSMISSIONS PER 24 SECONDS.
		CONTENTION ACCESS MODE/ RATE, 5	4	THREE TRANSMISSIONS PER 24 SECONDS.
		CONTENTION ACCESS MODE/ RATE, 6	5	TWO TRANSMISSIONS PER 12 SECONDS.
		CONTENTION ACCESS MODE/ RATE, 7	6	THREE TRANSMISSIONS PER 12 SECONDS.
		CONTENTION ACCESS MODE/ RATE, 8	7	FOUR TRANSMISSIONS PER 12 SECONDS.
		CONTENTION ACCESS MODE/ RATE, 9	8	SIX TRANSMISSIONS PER 12 SECONDS.
		CONTENTION ACCESS MODE/ RATE, 10	9	EIGHT TRANSMISSIONS PER 12 SECONDS.
		CONTENTION ACCESS MODE/ RATE, 11	10	12 TRANSMISSIONS PER 12 SECONDS.
		CONTENTION ACCESS MODE/ RATE, 12	11	16 TRANSMISSIONS PER 12 SECONDS.
		CONTENTION ACCESS MODE/ RATE, 13	12	20 TRANSMISSIONS PER 12 SECONDS.
		CONTENTION ACCESS MODE/ RATE, 14	13	26 TRANSMISSIONS PER 12 SECONDS.
		CONTENTION ACCESS MODE/ RATE, 15	14	32 TRANSMISSIONS PER 12 SECONDS.
		CONTENTION ACCESS MODE/ RATE, 16	15	64 TRANSMISSIONS PER 12 SECONDS.
		DEDICATED ACCESS MODE	16	
		UNDEFINED	17 THROUGH 62	
		OVERALL NO STATEMENT FOR ACCESS DESCRIPTION	63	
444	001	RECURRENCE RATE -----		EXPRESSES A NUMBER 'N' WHICH, AS PART OF A TIME SLOT ASSIGNMENT, ESTABLISHES THE NUMBER OF ASSIGNED TIME SLOTS SPACED UNIFORMLY OVER EACH EPOCH.
		1 TIME SLOT PER EPOCH	0	

FIELD CODING FOR J0.3E0

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
444	001	RECURRENCE RATE ----- 2 THROUGH 32,768 TIME SLOTS PER EPOCH	(CONTINUED) 1 THROUGH 15	EXPRESSED AS A POWER OF 2, I.E. BIT CODE 1=2 TO THE FIRST POWER, BIT CODE 2=2 TO THE SECOND POWER, ETC.
847	013	TIME SLOT SET ----- NO STATEMENT	 0	SPECIFIES THE SET OF TIME SLOTS AS SLOTS A, B, OR C EACH CONSISTING OF 32,768 TIME SLOTS PER EPOCH. WHEN THE TIME SLOT SET FIELD FOR A TIME SLOT BLOCK ASSIGNMENT IS SET TO NO STATEMENT, THE ENTIRE TIME SLOT BLOCK ASSIGNMENT WILL BE INTERPRETED AS NO STATEMENT.
		SET A	1	
		SET B	2	
		SET C	3	
441	021	TIME SLOT NUMBER, INDEX ----- NUMERIC	0 THROUGH 32767	IN 1 NUMBER INCREMENTS.
446	001	TIME SLOT ASSIGNMENT ACTION ----- ADD DELETE	0 1	THE WAY IN WHICH THE TIME SLOT ASSIGNMENT SHOULD BE INTERPRETED.
449	001	TIME SLOT ASSIGNMENT TYPE ----- TRANSMIT TIME SLOT ACTION RECEIVE TIME SLOT ACTION	0 1	
351	015	TIME SLOT ASSIGNMENT QUALIFIER ----- QUALIFIER 0	 0	QUALIFIES THE USE OF THE EXPLICIT TIME SLOT BLOCK AND THE OFFSET TIME SLOT SPECIFIED BY THE RELAY DELAY. INDICATES WHEN THE TIME SLOT ASSIGNMENT TYPE FIELD IS SET TO TRANSMIT THAT THE OFFSET TIME SLOT SPECIFIED BY RELAY DELAY, RECEIVE FIELD IS FOR RECEPTION OF AN ORIGINAL MESSAGE. INDICATES WHEN THE TIME SLOT ASSIGNMENT TYPE FIELD IS SET TO RECEIVE AND THE

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
351	015	TIME SLOT ASSIGNMENT QUALIFIER (CONTINUED) -----		
		QUALIFIER 1	1	CRYPTOMODE INDICATOR FIELD IS SET TO THE PARTITIONED VARIABLE MODE THAT THE RECEIVE ASSIGNMENT IN THE EXPLICIT TIME SLOT IS FOR RECEPTION OF A RELAYED MESSAGE AND THE OFFSET TIME SLOT SPECIFIED BY THE RELAY DELAY, RECEIVE FIELD IS TO BE USED ONLY FOR DATA DECRYPTION. INDICATES WHEN TIME SLOT ASSIGNMENT TYPE FIELD IS SET TO RECEIVE AND THE CRYPTOMODE INDICATOR FIELD IS SET TO THE COMMON VARIABLE MODE THAT THE RECEIVE ASSIGNMENT IN THE EXPLICIT TIME SLOT AND IN THE OFFSET TIME SLOT ARE FOR RECEPTION OF ORIGINAL MESSAGES. INDICATES WHEN THE CRYPTOMODE INDICATOR FIELD IS SET TO THE PARTITIONED VARIABLE MODE THAT THE EXPLICIT TIME SLOT IS FOR TRANSMISSION OR RECEPTION OF ORIGINAL MESSAGES AND THE OFFSET TIME SLOT SPECIFIED BY THE RELAY DELAY, RECEIVE FIELD IS FOR RECEPTION OF RELAYED MESSAGES. WHEN THE CRYPTOMODE INDICATOR FIELD IS SET TO THE COMMON VARIABLE MODE THE OFFSET TIME SLOT SPECIFIED BY RELAY DELAY, RECEIVE FIELD IS FOR RECEPTION OF A RELAY OF THE EXPLICIT TIME SLOT.
348	021	NET NUMBER, SPECIFIED ----- NUMERIC NO STATEMENT	0 THROUGH 126 127	INDICATES THE NET NUMBER OF THE TIME SLOT EXPLICITLY SPECIFIED.
801	019	CRYPTOVARIABLE LOGICAL LABEL NUMBER ONE ----- NO STATEMENT LOGICAL LABEL	0 1 THROUGH 127	A LOGICAL LABEL USED TO UNIQUELY IDENTIFY THE TRANSMISSION SECURITY (TRANSEC) CRYPTOVARIABLE.

FIELD CODING FOR J0.3E0

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
802	001	CRYPTOMODE INDICATOR ----- COMMON VARIABLE MODE	0	INDICATES THE MODE OF CRYPTOGRAPHIC OPERATION. INDICATES THE COMMON VARIABLE MODE WHERE BOTH MESSAGE SECURITY (MSEC) AND TRANSMISSION SECURITY (TRANSEC) ARE PROVIDED BY THE SAME CRYPTOVARIABLE. CRYPTOVARIABLE LOGICAL LABEL NUMBER ONE AND CRYPTOVARIABLE LOGICAL LABEL NUMBER TWO WILL BOTH CONTAIN THE SAME CRYPTOVARIABLE LABEL.
		PARTITIONED VARIABLE MODE	1	INDICATES THE PARTITIONED VARIABLE MODE WHERE MSEC IS PROVIDED BY ONE CRYPTOVARIABLE, AND TRANSEC IS PROVIDED BY A DIFFERENT CRYPTOVARIABLE. CRYPTOVARIABLE LOGICAL LABEL NUMBER ONE WILL CONTAIN THE LABEL OF THE TRANSEC VARIABLE, AND CRYPTOVARIABLE LOGICAL LABEL NUMBER TWO WILL CONTAIN THE LABEL OF THE MSEC VARIABLE.
801	020	CRYPTOVARIABLE LOGICAL LABEL NUMBER TWO ----- NO STATEMENT LOGICAL LABEL	0 1 THROUGH 127	A LOGICAL LABEL USED TO UNIQUELY IDENTIFY THE TRANSMISSION SECURITY (MSEC) CRYPTOVARIABLE.
843	010	RELAY DELAY, RECEIVE 1 -----		SPECIFIES THE RECEIVE ASSIGNMENT TIME SLOT BY THE NUMBER OF TIME SLOTS FOLLOWING EACH TIME SLOT OF THE BLOCK EXPLICITLY SPECIFIED, EXCEPT IN THE FOLLOWING CASE. WHEN THE TIME SLOT ASSIGNMENT TYPE IS SET TO RECEIVE, THE CRYPTOMODE INDICATOR FIELD IS SET TO THE PARTITIONED VARIABLE MODE, AND THE TIME SLOT ASSIGNMENT QUALIFIER IS SET TO ZERO, THE RELAY DELAY, RECEIVE 1 FIELD SPECIFIES THE TIME SLOT TO BE USED FOR DECRYPTION, BY THE NUMBER OF TIME SLOTS PRIOR TO THE TIME SLOT OF THE RECEIVED MESSAGE IN THE BLOCK EXPLICITLY

FIELD CODING FOR J0.3E0

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
843	010	RELAY DELAY, RECEIVE 1 -----	(CONTINUED)	
		NO STATEMENT	0	SPECIFIED.
		ILLEGAL	1 THROUGH 5	
		NUMERIC	6 THROUGH 127	IN ONE TIME SLOT INCREMENTS.

WORD MAP

WORD NUMBER: J0.3C1

WORD TITLE: TIME SLOT ASSIGNMENT CONTINUATION WORD

24	23	22	21:	20	19	18	17	16	15	14:	13	12	11	10	09	08	07:	06	05	04	03	02:	01	00:
<---				:	NET NUMBER, RELAY				:	NET NUMBER, DECRYPTION				:	CONTINUATION WORD LABEL				:	WORD FORMAT				:
				:	7				:	7				:	5				:	2				:

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

SPARE

49																							
----	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				

--->

WORD DESCRIPTION

WORD NUMBER: J0.3C1
WORD TITLE: TIME SLOT ASSIGNMENT CONTINUATION WORD

REFERENCE		BIT #		RESOLUTION, CODING, ETC
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	00001
348 022	NET NUMBER, DECRYPTION	7-	13 7	
348 007	NET NUMBER, RELAY	14-	20 7	
756 049	SPARE	21-	69 49	

FIELD CODING FOR J0.3C1 (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
348	022	NET NUMBER, DECRYPTION -----		SPECIFIES THE NET NUMBER TO BE USED FOR MESSAGE DECRYPTION WHEN THE TIME SLOT ASSIGNMENT TYPE FIELD IS SET TO RECEIVE, THE CRYPTOMODE INDICATOR FIELD IS SET TO PARTITIONED VARIABLE MODE, AND THE TIME SLOT ASSIGNMENT QUALIFIER FIELD IS SET TO ZERO.
		NUMERIC NO STATEMENT	0 THROUGH 126 127	
348	007	NET NUMBER, RELAY -----		SPECIFIES THE NET NUMBER OF THE RECEIVE ASSIGNMENT IN THOSE TIME SLOTS SPECIFIED BY THE RELAY DELAY, RECEIVE FIELD.
		NUMERIC NO STATEMENT	0 THROUGH 126 127	

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD NUMBER: J0.3C2

WORD TITLE: TIME SLOT ASSIGNMENT CONTINUATION WORD 2

24	23	22	21	20	19:	18	17	16	15:	14	13	12	11	10	09	08	07:	06	05	04	03	02:	01	00:			
INDEX NUMBER, NEW SET					:	ACTION CODE				:	INDEX NUMBER, SET						:	CONTINUATION WORD LABEL					:	WORD	:	FORMAT	:
8					:	4				:	8						:	5					:	2		:	

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
																						:		
SPARE																						:	---	
																						:		
43																						:		

```
: 69   68   67   66   65   64   63   62   61   60   59   58   57   56   55   54   53   52   51   50  
:  
:  
:  
:  
  
:  
:
```

WORD DESCRIPTION

WORD NUMBER: J0.3C2
WORD TITLE: TIME SLOT ASSIGNMENT CONTINUATION WORD 2

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	00010
1781 001	INDEX NUMBER, SET (INSET)	7-	14 8	
803 002	ACTION CODE (ACT CD)	15-	18 4	
1781 002	INDEX NUMBER, NEW SET (NEWSET)	19-	26 8	
756 043	SPARE	27-	69 43	

FIELD CODING FOR J0.3C2

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1781	001	INDEX NUMBER, SET -----		SPECIFIES THE INDEX NUMBER OF THE SET OF INITIALIZATION PARAMETERS TO WHICH THE ACTION CODE APPLIES.
		NO STATEMENT NUMERIC	0 1 THROUGH 255	
803	002	ACTION CODE -----		
		MODIFY SET	0	MODIFY THE INDICATED SET IN ACCORDANCE WITH THE ACTION SPECIFIED IN THE ORIGINAL J0.3 MESSAGE.
		SET CHANGE ORDER	1	CHANGE THE ACTIVE SET.
		SET CHANGE ORDER WITH START NET ENTRY	2	CHANGE THE ACTIVE SET AND TRIGGER A START NET ENTRY.
		ILLEGAL	3 THROUGH 15	
1781	002	INDEX NUMBER, NEW SET -----		SPECIFIES THE NEW INDEX NUMBER IN CASE OF SET CHANGE ORDER.
		NO STATEMENT NUMERIC	0 1 THROUGH 255	

MIL-STD-6016B

J0.4 MESSAGE SUMMARY

PURPOSE

The J0.4 Radio Relay Control message provides the means for the JU responsible for relay control to assign and deassign the paired slot radio relay function to a JTIDS/MIDS terminal and to control the relay function parameters.

DATA ELEMENT SUMMARY

<u>J0.4I</u>		<u>J0.4E0 (Continued)</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	RELAY LABEL, DIRECTED(6)*****	
LABEL, J-SERIES	5		
SUBLABEL, J-SERIES	3	<u>J0.4C1</u>	
MESSAGE LENGTH INDICATOR	3	DATA ELEMENT	# BITS
TRACK NUMBER, ADDRESSEE	15	WORD FORMAT	2
SPARE	3	CONTINUATION WORD LABEL	5
DELTA EPOCH	3	NET NUMBER, ORIGINAL NET	7
EPOCH SUBDIVISION	6	RELAY DELAY, RECEIVE 2	7
RELAY CONTROL ACTION	3	SPARE	49
RELAY FUNCTION	3		
PARTICIPATION GROUP(9)*****		<u>J0.4C2</u>	
SPARE(5)	*	DATA ELEMENT	# BITS
VOICE GROUP(4)	*	WORD FORMAT	2
SPARE(3)	*	CONTINUATION WORD LABEL	5
RELAY LABEL, DIRECTED(6)	*	RRIP, ROUTE 1	1
SPARE(2)	*	RRIP, ROUTE 2	1
ZOOM RELAY TRANSMIT NET(7)*****	9	RRIP, ROUTE 3	1
SPARE	6	RRIP, ROUTE 4	1
RECEIPT/COMPLIANCE	5	RRIP, ROUTE 5	1
RECURRENCE RATE, RECEIPT/	4	RRIP, ROUTE 6	1
COMPLIANCE		RRIP, ROUTE 7	1
		RRIP, ROUTE 8	1
<u>J0.4E0</u>		RRIP, ROUTE 9	1
DATA ELEMENT	# BITS	RRIP, ROUTE 10	1
WORD FORMAT	2	RRIP, ROUTE 11	1
RELAY DELAY	5	RRIP, ROUTE 12	1
PARTICIPATION GROUP RELAY	1	RRIP, ROUTE 13	1
ASSIGNMENT INDICATOR		RRIP, ROUTE 14	1
RELAY CONTROL ACTION	3	RRIP, ROUTE 15	1
RECURRENCE RATE	4	IRIP, ROUTE 1	1
TIME SLOT SET	2	IRIP, ROUTE 2	1
TIME SLOT NUMBER, INDEX	15	IRIP, ROUTE 3	1
NET NUMBER, RECEIVE	7	IRIP, ROUTE 4	1
NET NUMBER, TRANSMIT	7	IRIP, ROUTE 5	1
CRYPTOVARIABLE LOGICAL LABEL	7	IRIP, ROUTE 6	1
NUMBER ONE, RELAY		IRIP, ROUTE 7	1
CRYPTOMODE INDICATOR, RELAY	1	IRIP, ROUTE 8	1
CRYPTOVARIABLE LOGICAL LABEL	7	IRIP, ROUTE 9	1
NUMBER TWO, RELAY		IRIP, ROUTE 10	1
PARTICIPATION GROUP(9)*****		IRIP, ROUTE 11	1
RELAY FUNCTION(3)	*	IRIP, ROUTE 12	1
VOICE GROUP(4)	*	IRIP, ROUTE 13	1
SPARE(2)	*	IRIP, ROUTE 14	1

MIL-STD-6016B

J0.4 MESSAGE SUMMARY (Continued)

DATA ELEMENT SUMMARY (Continued)

J0.4C2 (Continued)	
DATA ELEMENT	# BITS
IRIP, ROUTE 15	1
SPARE	33

MIL-STD-6016B

J0.4 TRANSMIT/RECEIVE RULES

TITLE: Radio Relay Control Message

TRANSMIT RULES

1. The J0.4 Radio Relay Control message shall be transmitted only by the JU responsible for Relay Control.
2. The J0.4 message shall be addressed to a specific terminal and shall be transmitted with R/C = 0.
3. The J0.4I Radio Relay Control initial word shall be transmitted when only a relay control action is required.
4. One or more relay control actions can be transmitted in a J0.4 message consisting of a J0.4I Radio Relay Control initial word and:
 - a. One or more J0.4E0 Radio Relay Control extension words and J0.4C1 continuation words for relay assignment. Each radio relay assignment requires one J0.4E0 extension word, and if required by T/R Rule 5, a J0.4C1 continuation word.
 - b. A J0.4C2 continuation word if required by T/R Rule 7.

The transmission sequence of extension words and continuation words is defined in T/R Rule 6. The J0.4I initial word can also convey a separate relay control action, as in T/R Rule 3, when transmitted with additional extension and continuation words.

5. The J0.4C1 Radio Relay Control continuation word is transmitted to second and subsequent relays required to process the message when operating in the partitioned variable mode.
6. The transmission sequence of extension words and continuation words is defined as follows:

MIL-STD-6016B

J0.4 TRANSMIT/RECEIVE RULES (Continued)

TRANSMIT RULES (Continued)

a. When more than one relay time slot assignment is contained in the J0.4 message, all J0.4E0 Radio Relay Control extension words will be transmitted immediately following the J0.4I Radio Relay Control initial word. When one or more relay time slot assignments require a J0.4C1 continuation word, then the association of a J0.4C1 continuation word with its J0.4E0 extension word shall be defined as follows: the first J0.4C1 word will be associated with the first J0.4E0 extension word; the second J0.4C1 continuation word will be associated with the second J0.4E0 extension word, etc.

b. J0.4C2 continuation words shall be transmitted after the relay assignment words (J0.4E0, J0.4C1).

7. The J0.4C2 continuation word is required to define for the PG indicated in the J0.4I:

a. For 15 different route numbers, as to whether the JU will repromulgate messages received in that PG.

b. For 15 different route numbers, as to whether the JU will forward messages received in that PG to the host.

RECEIVE RULES

1. The terminal shall transmit a machine receipt J0.4 message (R/C = 2) if the terminal can accept and execute the specified action. If it cannot, the appropriate CANTPRO J0.4 message shall be transmitted.

2. The terminal shall, if possible, accept and execute the specified action.

3. If the addressed terminal is operating in the Radio Silence Mode, it shall discard the original J0.4 message (R/C = 0) without further processing or response.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD TITLE: RADIO RELAY CONTROL INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13:	12	11	10:	09	08	07:	06	05	04	03	02:	01	00:		
TRACK NUMBER, ADDRESSEE												:	MESSAGE		:	SUBLABEL,		:	LABEL, J-SERIES				:	WORD		:
												:	LENGTH		:	J-SERIES		:					:	FORMAT		:
												:	INDICATOR		:			:					:			:
15												:	3		:	3		:	5				:	2		:

49	48	47	46:	45	44	43:	42	41	40:	39	38	37	36	35	34:	33	32	31:	30	29	28:	27	26	25		
<---				:				:				:				:				:				:		
SPARE				:				:				:				:				:				:		
<---				:	RELAY FUNCTION			:	RELAY CONTROL ACTION			:	EPOCH SUBDIVISION			:	DELTA EPOCH			:	SPARE			:	>-->	
:				:				:				:				:				:				:		
<---				:	SP			:				:				:				:				:		
:				:				:				:				:				:				:		
				:	3			:	3			:	6			:	3			:	3			:		

:	69	68	67	66:	65	64	63	62	61:	60	59	58	57	56	55:	54	53	52	51	50	
:									:									PARTICIPATION GROUP			
:									:									VOICE GROUP :--->			
:	RECURRENCE RATE, RECEIPT/COMPLIANCE				RECEIPT/COMPLIANCE				:	SPARE								RELAY LABEL, DIRECTED			
:									:									ZOOM RELAY TRANSMIT NET			
:	4				5				:	6								9			

WORD DESCRIPTION

WORD NUMBER: J0.4I

WORD TITLE: RADIO RELAY CONTROL INITIAL WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	00
270	004	LABEL, J-SERIES	2-	6 5	00000
271	005	SUBLABEL, J-SERIES	7-	9 3	100
800	001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
769	006	TRACK NUMBER, ADDRESSEE	13-	27 15	
756	003	SPARE	28-	30 3	
1615	006	DELTA EPOCH	31-	33 3	
755	001	EPOCH SUBDIVISION	34-	39 6	
850	003	RELAY CONTROL ACTION (RC ACT)	40-	42 3	
863	001	RELAY FUNCTION (REL FTC)	43-	45 3	
838	004	PARTICIPATION GROUP (PTC GRP)	46-	54 9	INTERPRET ONLY WHEN REL FTC IS SET TO PARTICIPATION GROUP.
756	005	SPARE	46-	50 5	
894	001	VOICE GROUP (VC GP)	51-	54 4	INTERPRET ONLY WHEN REL FTC IS SET TO VOICE RELAY.
756	003	SPARE	46-	48 3	
865	001	RELAY LABEL, DIRECTED	49-	54 6	INTERPRET ONLY WHEN REL FTC IS SET TO DIRECTED RELAY.
756	002	SPARE (SP)	46-	47 2	
348	018	ZOOM RELAY TRANSMIT NET	48-	54 7	INTERPRET ONLY WHEN REL FTC IS SET TO ZOOM RELAY.
756	006	SPARE	55-	60 6	
392	008	RECEIPT/COMPLIANCE	61-	65 5	
444	025	RECURRENCE RATE, RECEIPT/COMPLIANCE (RRN R/C)	66-	69 4	

			FIELD CODING FOR J0.4I	(SHEET 1)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	006	TRACK NUMBER, ADDRESSEE -----		THE TN OF A UNIT (I.E., JU OR PU) TO WHICH A MESSAGE IS ADDRESSED.
		NO STATEMENT NUMERIC	0 00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		ILLEGAL NUMERIC	00077 (OCTAL) 00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC	00177 (OCTAL)	COLLECTIVE ADDRESS.
		NUMERIC	00200 THROUGH 07776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL NUMERIC	07777 (OCTAL) 10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
1615	006	DELTA EPOCH -----		SPECIFIES THE EPOCH IN WHICH THE ADDRESSED TERMINAL SHALL EXECUTE THE ASSIGNMENT.
		CURRENT EPOCH	0	
		1 EPOCH FROM THE CURRENT EPOCH	1	
		2 EPOCHS FROM THE CURRENT EPOCH	2	
		3 EPOCHS FROM THE CURRENT EPOCH	3	
		4 EPOCHS FROM THE CURRENT EPOCH	4	
		5 EPOCHS FROM THE CURRENT EPOCH	5	
		6 EPOCHS FROM THE CURRENT EPOCH	6	
		7 EPOCHS FROM THE CURRENT EPOCH	7	

FIELD CODING FOR J0.4I

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
755	001	EPOCH SUBDIVISION -----		EPOCHS ARE DIVIDED INTO 64 EQUAL SUBDIVISIONS, NUMBERED 0 TO 63. THE ASSIGNMENT IS THE FIRST TIME SLOT OF THE SUBDIVISION INDICATED, N, (I.E. TIMESLOT A*N(512), N = 0 TO 63, A = TIME SLOT SET.) WHEN THE DELTA EPOCH IS EQUAL TO ZERO AND THE EPOCH SUBDIVISION IS EQUAL TO ZERO, THE ASSIGNMENT SHALL BE EXECUTED IMMEDIATELY. WHERE "A" IS THE TIME SLOT SET AND 'N' VARIES FROM 0-63.
		TIME SLOT (A*N(512))	0 THROUGH 63	
850	003	RELAY CONTROL ACTION -----		SPECIFIES THE BASIC RADIO RELAYING CONTROL REQUIREMENTS TO BE EXECUTED BY THE ADDRESSED TERMINAL.
		DELETE	0	
		SUSPEND	1	
		CONDITIONAL	2	
		UNCONDITIONAL	3	
		MESSAGE DIRECTED	4	
		EQUAL ZERO		
		MESSAGE DIRECTED	5	
		EQUAL ONE		
		UNDEFINED	6	
		NO STATEMENT	7	
863	001	RELAY FUNCTION -----		SPECIFIES THE RELAY FUNCTION THE ADDRESSED TERMINAL IS ASSIGNED.
		MAIN NET	0	
		VOICE RELAY	1	
		CONTROL RELAY	2	
		ZOOM RELAY	3	
		DIRECTED RELAY	4	
		ALL RELAY FUNCTIONS	5	ILLEGAL FOR THE J0.4E0 WORD.
		PARTICIPATION GROUP	6	ILLEGAL FOR THE J0.4E0 WORD.
		NO STATEMENT	7	ILLEGAL FOR THE J0.4E0 WORD.
838	004	PARTICIPATION GROUP -----		SPECIFIES THE INDEX NUMBER OF THE PARTICIPATION GROUP TO WHICH AN ASSIGNED BLOCK OF TIME SLOTS APPLY.
		NO STATEMENT	0	
		INITIAL ENTRY	1	

FIELD CODING FOR J0.4I

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
838	004	PARTICIPATION GROUP -----	(CONTINUED)	
		RTT A	2	
		RTT B	3	
		NETWORK MANAGEMENT	4	
		PPLI AND STATUS GROUP A	5	
		PPLI AND STATUS GROUP B	6	
		SURVEILLANCE	7	
		MISSION MANAGEMENT/ WEAPONS COORDINATION	8	
		CONTROL	9	
		ELECTRONIC WARFARE	10	
		UNDEFINED	11	
		VOICE GROUP A	12	
		VOICE GROUP B	13	
		PARTICIPATION GROUPS 14 THROUGH 18	14 THROUGH 18	DEFINED BY INTERFACE OPERATING PROCEDURES AND TACTICAL COMMUNICATIONS PLAN.
		NONC2 JU-TO-NONC2 JU A	19	
		NONC2 JU-TO-NONC2 JU B	20	
		ENGAGEMENT COORDINATION	21	
		COMPOSITE A	22	
		COMPOSITE B	23	
		PARTICIPATION GROUPS 24 THROUGH 26	24 THROUGH 26	DEFINED BY INTERFACE OPERATING PROCEDURES AND TACTICAL COMMUNICATIONS PLAN.
		JOINT NET PPLI	27	
		DISTRIBUTED NETWORK MANAGEMENT	28	
		RESIDUAL MESSAGES	29	
		IJMS POSITION AND STATUS	30	
		OTHER IJMS	31	
		PARTICIPATION GROUPS 32 THROUGH 509	32 THROUGH 509	DEFINED BY INTERFACE OPERATING PROCEDURES AND TACTICAL COMMUNICATIONS PLAN.
		NET CONTROL NEEDLINE	510	
		NET STATUS NEEDLINE	511	
894	001	VOICE GROUP -----		DEFINES THE VOICE GROUP.
		NO STATEMENT	0	
		VOICE GROUP, A	1	
		VOICE GROUP, B	2	
		UNDEFINED	3 THROUGH 15	

FIELD CODING FOR J0.4I

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
865	001	RELAY LABEL, DIRECTED ----- NO STATEMENT RELAY LABEL	0 1 THROUGH 63	PROVIDES THE RELAY LABEL FOR DIRECTED RELAY.
348	018	ZOOM RELAY TRANSMIT NET ----- NUMERIC NO STATEMENT	0 THROUGH 126 127	
392	008	RECEIPT/COMPLIANCE ----- ORIGINAL ORDER ORIGINAL ORDER MACHINE RECEIPT WILCO (WILL COMPLY) HAVCO (HAVE COMPLIED) ORIGINAL ORDER CANTCO (CANNOT COMPLY) CANTPRO (CANNOT PROCESS)	0 1 2 3 4 5 6 7	RECEIPT/COMPLIANCE RESPONSE REQUIRED. RECEIPT/COMPLIANCE RESPONSE NOT REQUIRED. MUST BE USED IN CONJUNCTION WITH ORIGINAL ORDER MESSAGES ADDRESSED TO COLLECTIVE ADDRESSES. THE ORIGINAL ORDER SHALL BE TRANSMITTED 3 TIMES. MESSAGE RECEIVED ERROR FREE. THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER WILL COMPLY. IN THIS USAGE, THE SYSTEM COMPONENT IS A HUMAN OPERATOR OR (UNMANNED VEHICLE ONLY) A MACHINE. THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER HAS COMPLIED. IN THIS USAGE, THE SYSTEM COMPONENT MAY BE A HUMAN OPERATOR OR A MACHINE. RECEIPT/COMPLIANCE RESPONSE (MR AND/ OR CANTPRO ONLY) REQUIRED. THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER CANNOT COMPLY. IN THIS USAGE, THE SYSTEM COMPONENT IS A HUMAN OPERATOR OR (UNMANNED VEHICLE ONLY) A MACHINE. NON-SPECIFIC SYSTEM LIMITATION OR CONFLICT. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS

			FIELD CODING FOR J0.4I		(SHEET 5)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION	
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)		
		CANTPRO (CANNOT PROCESS)	8	BEEN GENERATED. TIME SLOT ASSIGNMENT CONFLICT DETECTED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.	
		CANTPRO (CANNOT PROCESS)	9	CRYPTOVARIABLE NOT HELD. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.	
		CANTPRO (CANNOT PROCESS)	10	PARTICIPATION GROUP NOT DEFINED. THIS IS AN AUTOMATIC COMPUTER- GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.	
		CANTPRO (CANNOT PROCESS)	11	APPLICABLE ASSIGNMENT TABLE FULL. THIS IS AN AUTOMATIC COMPUTER- GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.	
		CANTPRO (CANNOT PROCESS)	12	RELAY FUNCTION SPECIFIED ALREADY HAS ASSIGNED TIME SLOT BLOCKS FOR WHICH A DIFFERENT RELAY MODE/NET NUMBER HAS BEEN SPECIFIED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.	
		CANTPRO (CANNOT PROCESS)	13	INTERFERENCE PROTECTION FEATURES WOULD BE VIOLATED BY ACCEPTANCE OF ASSIGNMENT. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED	

FIELD CODING FOR J0.4I				(SHEET 6)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
		CANTPRO (CANNOT PROCESS)	14	OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	15	HOST SUBSCRIBER INTERFACE IS INACTIVE AND MESSAGE IS NOT PROCESSED BY THE TERMINAL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	16	TN, ADDRESSEE DOES NOT IMPLEMENT THE ACTION REQUESTED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	17	ONE OR MORE TNS IN THE OM NOT HELD. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	18	TN, REFERENCE OR TN, FRIENDLY WEAPON IS UNDER OWN UNIT CONTROL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	19	UNIT NOT EXERCISING AIR CONTROL CAPABILITY. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)		UNACCEPTABLE IDENTITY. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO

FIELD CODING FOR J0.4I				(SHEET 7)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
		CANTPRO (CANNOT PROCESS)	20	RESPONSE HAS BEEN GENERATED. ADDRESSEE TN IS INACTIVE. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	21	THE FORWARDING UNIT DID NOT RECEIVE A MACHINE RECEIPT FROM THE ADDRESSEE TN. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	22	TN, REFERENCE OR TN, FRIENDLY WEAPON IS NOT UNDER THIS UNIT'S CONTROL. THIS IS AN AUTOMATIC COMPUTER- GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		UNDEFINED NO STATEMENT	23 THROUGH 30 31	
444	025	RECURRENCE RATE, RECEIPT/ COMPLIANCE -----		IDENTIFIES THE TIME SLOT IN WHICH THE RECEIPT/COMPLIANCE FOR THE MESSAGE IS TO BE TRANSMITTED.
		NO STATEMENT NUMERIC	0 1 THROUGH 15	THE NUMERIC VALUE FOR RECEIPT/ COMPLIANCE, SPECIFIED AS RECURRENCE RATE NUMBER, DEFINES THE NUMBER N OF CONSECUTIVE TIME SLOTS FROM THE ORIGINAL TRANSMISSION TO THE DONATED TIME SLOT: N=3X2 TO THE (15-RRN) POWER.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: RADIO RELAY CONTROL EXTENSION WORD

24	23	22	21	20	19	18	17:	16	15:	14	13	12	11:	10	09	08:	07:	06	05	04	03	02:	01	00:
TIME SLOT NUMBER, INDEX							:	SET	:	RECURRENT RATE	:	RELAY CONTROL ACTION	:	PGR: IND:	RELAY DELAY				:	WORD FORMAT	:			
15							:	2	:	4	:	3	:	1	:	5	:	2	:					

49	48	47	46:	45	44	43	42	41	40	39:	38	37	36	35	34	33	32:	31	30	29	28	27	26	25	
CVL N1R			:	NET NUMBER, TRANSMIT						:	NET NUMBER, RECEIVE						:	---							
7			:	7						:	7						:								

:	69	68	67	66	65	64	63	62	61:	60	59	58	57	56	55	54:	53:	52	51	50	
:	PARTICIPATION GROUP									:								:	:		
:										:								:	:		
:	SP	:	VOICE GROUP			:				:	CRYPTOVARIABLE LOGICAL							:	CYP:	---	>
:	:	:				:	RELAY			:	LABEL NUMBER TWO, RELAY							:	MDE:		
:										:								:	:		
:	RELAY LABEL, DIRECTED									:								:	:		
:	9									:	7							:	1	:	

WORD DESCRIPTION

WORD NUMBER: J0.4E0

WORD TITLE: RADIO RELAY CONTROL EXTENSION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550 001		WORD FORMAT	0-	1 2	10
843 001		RELAY DELAY	2-	6 5	
896 001		PARTICIPATION GROUP RELAY ASSIGNMENT INDICATOR (PGR IND)	7	1	
850 003		RELAY CONTROL ACTION (RC ACT)	8-	10 3	
444 001		RECURRENCE RATE	11-	14 4	
847 013		TIME SLOT SET	15-	16 2	
441 021		TIME SLOT NUMBER, INDEX	17-	31 15	
348 004		NET NUMBER, RECEIVE	32-	38 7	
348 005		NET NUMBER, TRANSMIT	39-	45 7	SAME CODING AS FOR BITS 32-38.
801 002		CRYPTOVARIABLE LOGICAL LABEL NUMBER ONE, RELAY (CVL N1R)	46-	52 7	
802 002		CRYPTOMODE INDICATOR, RELAY (CYP MDE)	53	1	
801 003		CRYPTOVARIABLE LOGICAL LABEL NUMBER TWO, RELAY	54-	60 7	SAME CODING AS FOR BITS 46-52.
838 004		PARTICIPATION GROUP (PTC GRP)	61-	69 9	INTERPRET ONLY WHEN PGR IND IS SET TO VALUE 1.
863 001		RELAY FUNCTION (REL FTC)	61-	63 3	INTERPRET ONLY WHEN PGR IND IS SET TO VALUE 0.
894 001		VOICE GROUP (VC GP)	64-	67 4	INTERPRET ONLY WHEN REL FTC IS SET TO VOICE RELAY.
756 002		SPARE (SP)	68-	69 2	
865 001		RELAY LABEL, DIRECTED	64-	69 6	INTERPRET ONLY WHEN REL FTC IS SET TO DIRECTED RELAY.

FIELD CODING FOR J0.4E0

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
843	001	RELAY DELAY -----		SPECIFIES THE DELAY IN TIME SLOTS BETWEEN THE TIME SLOT DURING WHICH A MESSAGE IS RECEIVED AND THE TIME SLOT IN WHICH IT WILL BE RELAYED.
		NO STATEMENT	0	
		ILLEGAL	1 THROUGH 5	
		6 THROUGH 31 TIME SLOTS	6 THROUGH 31	IN ONE TIME SLOT INCREMENTS.
896	001	PARTICIPATION GROUP RELAY ASSIGNMENT INDICATOR -----		INDICATES WHETHER OR NOT THE ASSIGNMENT IS FOR RELAY OF A PARTICIPATION GROUP.
		ALL OTHER RELAY ASSIGNMENTS	0	
		PARTICIPATION GROUP RELAY ASSIGNMENT	1	
850	003	RELAY CONTROL ACTION -----		SPECIFIES THE BASIC RADIO RELAYING CONTROL REQUIREMENTS TO BE EXECUTED BY THE ADDRESSED TERMINAL.
		DELETE	0	
		SUSPEND	1	
		CONDITIONAL	2	
		UNCONDITIONAL	3	
		MESSAGE DIRECTED EQUAL ZERO	4	
		MESSAGE DIRECTED EQUAL ONE	5	
		UNDEFINED	6	
		NO STATEMENT	7	
444	001	RECURRENCE RATE -----		EXPRESSES A NUMBER 'N' WHICH, AS PART OF A TIME SLOT ASSIGNMENT, ESTABLISHES THE NUMBER OF ASSIGNED TIME SLOTS SPACED UNIFORMLY OVER EACH EPOCH.
		1 TIME SLOT PER EPOCH	0	
		2 THROUGH 32,768 TIME SLOTS PER EPOCH	1 THROUGH 15	EXPRESSED AS A POWER OF 2, I.E. BIT CODE 1=2 TO THE FIRST POWER, BIT CODE 2=2 TO THE SECOND POWER, ETC.
847	013	TIME SLOT SET -----		SPECIFIES THE SET OF TIME SLOTS AS SLOTS A, B, OR C EACH CONSISTING OF 32,768 TIME SLOTS PER EPOCH. WHEN THE TIME SLOT SET FIELD FOR A
		NO STATEMENT	0	

FIELD CODING FOR J0.4E0

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
847	013	TIME SLOT SET -----	(CONTINUED)	
		SET A	1	TIME SLOT BLOCK ASSIGNMENT IS SET
		SET B	2	TO NO STATEMENT, THE ENTIRE TIME
		SET C	3	SLOT BLOCK ASSIGNMENT WILL BE
				INTERPRETED AS NO STATEMENT.
441	021	TIME SLOT NUMBER, INDEX -----		
		NUMERIC	0 THROUGH 32767	IN 1 NUMBER INCREMENTS.
348	004	NET NUMBER, RECEIVE -----		
		ASSIGNED NET	0 THROUGH 126	
		NO STATEMENT	127	
801	002	CRYPTOVARIABLE LOGICAL LABEL NUMBER ONE, RELAY -----		A LOGICAL LABEL USED TO UNIQUELY
		NO STATEMENT	0	IDENTIFY THE CRYPTOVARIABLE.
		LOGICAL LABEL	1 THROUGH 127	
802	002	CRYPTOMODE INDICATOR, RELAY -----		INDICATES THE MODE OF CRYPTOGRAPHIC
		COMMON VARIABLE	0	OPERATION.
		MODE		INDICATES THE COMMON VARIABLE MODE
				WHERE BOTH MESSAGE SECURITY (MSEC)
				AND TRANSMISSION SECURITY
				(TRANSEC) ARE PROVIDED BY THE SAME
				CRYPTOVARIABLE. CRYPTOVARIABLE
				LOGICAL LABEL NUMBER ONE IS THE
				RELAY RECEIVE CRYPTOVARIABLE AND
				CRYPTOVARIABLE LOGICAL LABEL TWO
				IS THE RELAY TRANSMIT VARIABLE.
		PARTITIONED VARIABLE	1	INDICATES THE PARTITIONED VARIABLE
		MODE		MODE WHERE MSEC IS PROVIDED BY ONE
				CRYPTOVARIABLE, AND TRANSEC IS
				PROVIDED BY A DIFFERENT
				CRYPTOVARIABLE. CRYPTOVARIABLE
				LOGICAL LABEL NUMBER ONE WILL
				CONTAIN THE LABEL OF THE TRANSEC
				VARIABLE, AND CRYPTOVARIABLE
				LOGICAL LABEL NUMBER TWO WILL

FIELD CODING FOR J0.4E0

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
802	002	CRYPTOMODE INDICATOR, RELAY -----	(CONTINUED)	
				CONTAIN THE LABEL OF THE MSEC VARIABLE FOR BOTH RELAY RECEIVE AND RELAY TRANSMIT TIME SLOTS.
838	004	PARTICIPATION GROUP -----		SPECIFIES THE INDEX NUMBER OF THE PARTICIPATION GROUP TO WHICH AN ASSIGNED BLOCK OF TIME SLOTS APPLY.
		NO STATEMENT	0	
		INITIAL ENTRY	1	
		RTT A	2	
		RTT B	3	
		NETWORK MANAGEMENT	4	
		PPLI AND STATUS GROUP A	5	
		PPLI AND STATUS GROUP B	6	
		SURVEILLANCE	7	
		MISSION MANAGEMENT/ WEAPONS COORDINATION	8	
		CONTROL	9	
		ELECTRONIC WARFARE	10	
		UNDEFINED	11	
		VOICE GROUP A	12	
		VOICE GROUP B	13	
		PARTICIPATION GROUPS 14 THROUGH 18	14 THROUGH 18	DEFINED BY INTERFACE OPERATING PROCEDURES AND TACTICAL COMMUNICATIONS PLAN.
		NONC2 JU-TO-NONC2 JU A	19	
		NONC2 JU-TO-NONC2 JU B	20	
		ENGAGEMENT COORDINATION	21	
		COMPOSITE A	22	
		COMPOSITE B	23	
		PARTICIPATION GROUPS 24 THROUGH 26	24 THROUGH 26	DEFINED BY INTERFACE OPERATING PROCEDURES AND TACTICAL COMMUNICATIONS PLAN.
		JOINT NET PPLI	27	
		DISTRIBUTED NETWORK MANAGEMENT	28	
		RESIDUAL MESSAGES	29	
		IJMS POSITION AND STATUS	30	
		OTHER IJMS	31	
		PARTICIPATION GROUPS 32 THROUGH 509	32 THROUGH 509	DEFINED BY INTERFACE OPERATING PROCEDURES AND TACTICAL COMMUNICATIONS PLAN.

FIELD CODING FOR J0.4E0

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
838	004	PARTICIPATION GROUP ----- NET CONTROL NEEDLINE NET STATUS NEEDLINE	(CONTINUED) 510 511	
863	001	RELAY FUNCTION ----- MAIN NET VOICE RELAY CONTROL RELAY ZOOM RELAY DIRECTED RELAY ALL RELAY FUNCTIONS PARTICIPATION GROUP NO STATEMENT	 0 1 2 3 4 5 6 7	 SPECIFIES THE RELAY FUNCTION THE ADDRESSED TERMINAL IS ASSIGNED. ILLEGAL FOR THE J0.4E0 WORD. ILLEGAL FOR THE J0.4E0 WORD. ILLEGAL FOR THE J0.4E0 WORD.
894	001	VOICE GROUP ----- NO STATEMENT VOICE GROUP, A VOICE GROUP, B UNDEFINED	 0 1 2 3 THROUGH 15	 DEFINES THE VOICE GROUP.
865	001	RELAY LABEL, DIRECTED ----- NO STATEMENT RELAY LABEL	 0 1 THROUGH 63	 PROVIDES THE RELAY LABEL FOR DIRECTED RELAY.

WORD MAP

WORD NUMBER: J0.4C1

WORD TITLE: RADIO RELAY CONTROL CONTINUATION WORD

24	23	22	21:	20	19	18	17	16	15	14:	13	12	11	10	09	08	07:	06	05	04	03	02:	01	00:
<---				:	RELAY DELAY, RECEIVE 2						:	NET NUMBER, ORIGINAL NET						:	CONTINUATION WORD LABEL				:	WORD FORMAT
				:	7						:	7						:	5				:	2

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

SPARE

49																							
----	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				

WORD DESCRIPTION

WORD NUMBER: J0.4C1

WORD TITLE: RADIO RELAY CONTROL CONTINUATION WORD

REFERENCE		BIT #		RESOLUTION, CODING, ETC
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	00001
348 012	NET NUMBER, ORIGINAL NET	7-	13 7	
843 011	RELAY DELAY, RECEIVE 2	14-	20 7	
756 049	SPARE	21-	69 49	

FIELD CODING FOR J0.4C1 (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
348	012	NET NUMBER, ORIGINAL NET -----		THE NET NUMBER USED BY THE ORIGINAL TRANSMITTER FOR THE PARTITIONED VARIABLE MODE. THIS PERMITS AN INTERMEDIATE RELAY IN A MULTIHOP RELAY PATH TO DECRYPT THE RECEIVED MESSAGE.
		NUMERIC NO STATEMENT	0 THROUGH 126 127	
843	011	RELAY DELAY, RECEIVE 2 -----		SPECIFIES THE TIME SLOT TO BE USED FOR MESSAGE DECRYPTION BY THE NUMBER OF TIME SLOTS PRIOR TO THE TIME SLOT IN WHICH THE MESSAGE TO BE RELAYED IS RECEIVED.
		NO STATEMENT ILLEGAL NUMERIC	0 1 THROUGH 5 6 THROUGH 127	IN ONE TIME SLOT INCREMENTS.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J0.4C2

WORD TITLE: RADIO RELAY CONTROL CONTINUATION WORD 2

: 24: 23: 22: 21: 20: 19: 18: 17: 16: 15: 14: 13: 12: 11: 10: 09: 08: 07: 06 05 04 03 02: 01 00:																							
: IRI: IRI: IRI: RRI:																							
: 3 : 2 : 1 : 15 : 14 : 13 : 12 : 11 : 10 : 9 : 8 : 7 : 6 : 5 : 4 : 3 : 2 : 1 :																							
: :																							
: 1 :																							
: 49 48 47 46 45 44 43 42 41 40 39 38 37: 36: 35: 34: 33: 32: 31: 30: 29: 28: 27: 26: 25:																							
<---: IRI:																							
: 15 : 14 : 13 : 12 : 11 : 10 : 9 : 8 : 7 : 6 : 5 : 4 :																							
: :																							
: 1 : 1 : 1 : 1 : 1 : 1 : 1 : 1 : 1 : 1 : 1 : 1 : 1 : 1 : 1 : 1 :																							

: 69 68 67 66 65 64 63 62 61 60 59 58 57 56 55 54 53 52 51 50
: : :
SPARE
: : :
33

WORD DESCRIPTION

WORD NUMBER: J0.4C2

WORD TITLE: RADIO RELAY CONTROL CONTINUATION WORD 2

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550 001		WORD FORMAT	0-	1 2	01
1551 001		CONTINUATION WORD LABEL	2-	6 5	00010
1734 001		RRIP, ROUTE 1 (RRI 1)	7	1	
1734 002		RRIP, ROUTE 2 (RRI 2)	8	1	SAME CODING AS BIT 7.
1734 003		RRIP, ROUTE 3 (RRI 3)	9	1	SAME CODING AS BIT 7.
1734 004		RRIP, ROUTE 4 (RRI 4)	10	1	SAME CODING AS BIT 7.
1734 005		RRIP, ROUTE 5 (RRI 5)	11	1	SAME CODING AS BIT 7.
1734 006		RRIP, ROUTE 6 (RRI 6)	12	1	SAME CODING AS BIT 7.
1734 007		RRIP, ROUTE 7 (RRI 7)	13	1	SAME CODING AS BIT 7.
1734 008		RRIP, ROUTE 8 (RRI 8)	14	1	SAME CODING AS BIT 7.
1734 009		RRIP, ROUTE 9 (RRI 9)	15	1	SAME CODING AS BIT 7.
1734 010		RRIP, ROUTE 10 (RRI 10)	16	1	SAME CODING AS BIT 7.
1734 011		RRIP, ROUTE 11 (RRI 11)	17	1	SAME CODING AS BIT 7.
1734 012		RRIP, ROUTE 12 (RRI 12)	18	1	SAME CODING AS BIT 7.
1734 013		RRIP, ROUTE 13 (RRI 13)	19	1	SAME CODING AS BIT 7.
1734 014		RRIP, ROUTE 14 (RRI 14)	20	1	SAME CODING AS BIT 7.
1734 015		RRIP, ROUTE 15 (RRI 15)	21	1	SAME CODING AS BIT 7.
1735 001		IRIP, ROUTE 1 (IRI 1)	22	1	
1735 002		IRIP, ROUTE 2 (IRI 2)	23	1	SAME CODING AS BIT 22.
1735 003		IRIP, ROUTE 3 (IRI 3)	24	1	SAME CODING AS BIT 22.
1735 004		IRIP, ROUTE 4 (IRI 4)	25	1	SAME CODING AS BIT 22.
1735 005		IRIP, ROUTE 5 (IRI 5)	26	1	SAME CODING AS BIT 22.
1735 006		IRIP, ROUTE 6 (IRI 6)	27	1	SAME CODING AS BIT 22.
1735 007		IRIP, ROUTE 7 (IRI 7)	28	1	SAME CODING AS BIT 22.
1735 008		IRIP, ROUTE 8 (IRI 8)	29	1	SAME CODING AS BIT 22.
1735 009		IRIP, ROUTE 9 (IRI 9)	30	1	SAME CODING AS BIT 22.
1735 010		IRIP, ROUTE 10 (IRI 10)	31	1	SAME CODING AS BIT 22.
1735 011		IRIP, ROUTE 11 (IRI 11)	32	1	SAME CODING AS BIT 22.
1735 012		IRIP, ROUTE 12 (IRI 12)	33	1	SAME CODING AS BIT 22.
1735 013		IRIP, ROUTE 13 (IRI 13)	34	1	SAME CODING AS BIT 22.
1735 014		IRIP, ROUTE 14 (IRI 14)	35	1	SAME CODING AS BIT 22.
1735 015		IRIP, ROUTE 15 (IRI 15)	36	1	SAME CODING AS BIT 22.
756 033		SPARE	37-	69 33	

FIELD CODING FOR J0.4C2 (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1734	001	RRIP, ROUTE 1 -----		SPECIFIES THE RELAY ROUTE INDICATOR PARAMETER FOR ROUTE 1.
		REPROMULGATE	0	
		DO NOT REPROMULGATE	1	
1735	001	IRIP, ROUTE 1 -----		SPECIFIES THE INTEREST ROUTE INDICATOR PARAMETER FOR ROUTE 1.
		FORWARD	0	
		DO NOT FORWARD	1	

MIL-STD-6016B

J0.5 MESSAGE SUMMARY

PURPOSE

The J0.5 Repromulgation Relay message is used to request that those messages in the same time slot containing the J0.5 message be relayed by all JUs receiving the message.

DATA ELEMENT SUMMARY

<u>J0.5I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
RECURRENCE RATE INDICATOR	4
SPARE	10
REPROMULGATION COUNTER	4
REPROMULGATION COUNTER, ORIGINAL VALUE	4
ROUTE NUMBER, 2	4
SPARE	31

MIL-STD-6016B

J0.5 TRANSMIT/RECEIVE RULES

TITLE: Repromulgation Relay Message

TRANSMIT RULES

1. The J0.5 Repromulgation Relay message shall be transmitted as the first message in a time slot to indicate a request that the messages in the time slot be repromulgated in accordance with the setting of the fields.
2. The J0.5 message and any other messages in the same time slot shall be repromulgated by any JU not in the Radio Silence Mode in the time slot indicated by the Recurrence Rate Indicator field.
3. The Repromulgation Counter field shall be decremented by one prior to retransmission.
4. The terminal shall transmit the No Statement value in the Route Number, 2 field unless it has been configured and initialized to perform the repromulgation relay filtering function.

MIL-STD-6016B

J0.5 TRANSMIT/RECEIVE RULES (Continued)

TRANSMIT RULES (Continued)

RECEIVE RULES

1. The original time slot of transmission shall be calculated based on the fields in the J0.5 message and the time slot in which the message was received.
2. The Source TN and Recurrence Rate Indicator fields in the J0.5 message and the original time slot of transmission shall be stored for message identification. Such message identification groups shall be retained for up to sixteen Source TNs, with at least three values of the Recurrence Rate Indicator per Source TN (capacity of 48 message identification groups).
3. The J0.5 message shall be discarded if the message, as identified by the Source TN, Recurrence Rate Indicator, and original time slot of transmission, has been previously received.
4. The J0.5 message shall not be repromulgated if the Repromulgation Counter field is equal to 0.
5. A terminal configured and initialized to perform the repromulgation relay filtering function shall perform the required relay only when the J0.5 message is received in which:
 - a. The Route Number, 2 field is set to the No Statement value, or
 - b. The Route Number, 2 field is set to a value for which the terminal has been initialized as a relay.

No other terminals shall process the Route Number, 2 field.

.....

WORD TITLE: REPROMULGATION RELAY INITIAL WORD

<---	:ROUTE NUMBER, 2:	COUNTER,	COUNTER	---
:	:	ORIGINAL VALUE	:	:
:	4	4	4	:

WORD DESCRIPTION

WORD NUMBER: J0.5I

WORD TITLE: REPROMULGATION RELAY INITIAL WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	00
270 004	LABEL, J-SERIES	2-	6 5	00000
271 005	SUBLABEL, J-SERIES	7-	9 3	101
800 001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
444 013	RECURRENCE RATE INDICATOR	13-	16 4	
756 010	SPARE	17-	26 10	
1668 001	REPROMULGATION COUNTER	27-	30 4	
1668 002	REPROMULGATION COUNTER, ORIGINAL VALUE	31-	34 4	
1727 002	ROUTE NUMBER, 2	35-	38 4	
756 031	SPARE	39-	69 31	

FIELD CODING FOR J0.5I					(SHEET 1)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION	
444	013	RECURRENCE RATE INDICATOR -----		INDICATES THAT THE MESSAGE IS TO BE RETRANSMITTED IN THE TIME SLOT SPECIFIED BY THE RECURRENCE RATE NUMBER.	
		RECURRENCE RATE NUMBER	0 THROUGH 15		
1668	001	REPROMULGATION COUNTER -----		INDICATES THE NUMBER OF REPROMULGATIONS REQUIRED.	
		REPROMULGATION REQUIRED	0 THROUGH 15		
1668	002	REPROMULGATION COUNTER, ORIGINAL VALUE -----		INDICATES THE ORIGINAL VALUE SET IN THE REPROMULGATION COUNTER.	
		NUMERIC	0 THROUGH 15		
1727	002	ROUTE NUMBER, 2 -----		0: NO STATEMENT 1 THROUGH 15: INDICATES THE ROUTE NUMBER.	
		NUMERIC	0 THROUGH 15		

MIL-STD-6016B

J0.6 MESSAGE SUMMARY

PURPOSE

The J0.6 Communications Control message shall be used to initiate or terminate specific transmissions, to control communications and to request network management actions.

DATA ELEMENT SUMMARY

<u>J0.6I</u>		<u>J0.6C2 (Continued)</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	NEEDLINE PARTICIPATION GROUP	3
LABEL, J-SERIES	5	STATUS AMPLIFY, 1	
SUBLABEL, J-SERIES	3	TEST DURATION COUNT, 1	8
MESSAGE LENGTH INDICATOR	3	PARTICIPATION GROUP, 1	9
TRACK NUMBER, ADDRESSEE	15	NEEDLINE PARTICIPATION GROUP	4
SPARE	3	STATUS, 2	
LABEL, J-SERIES REQUEST	5	NEEDLINE PARTICIPATION GROUP	3
SUBLABEL, J-SERIES REQUEST	3	STATUS AMPLIFY, 2	
ACTION, COMMUNICATION CONTROL	2	TEST DURATION COUNT, 2	8
SPARE	2	PARTICIPATION GROUP, 2	9
PARTICIPATION GROUP	9	SPARE	15
TRANSMISSION TERMINATION	4		
DESIGNATOR			
SPARE	5		
RECEIPT/COMPLIANCE	5		
RECURRENCE RATE, RECEIPT/	4		
COMPLIANCE			
<u>J0.6C1</u>		<u>J0.6C3</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	WORD FORMAT	2
CONTINUATION WORD LABEL	5	CONTINUATION WORD LABEL	5
ACTION, TIME SLOT REQUEST	2	ACTION CODE, CRYPTOVARIABLE	4
SPARE	1	PARTICIPATION GROUP	9
PARTICIPATION GROUP, 1	9	NET NUMBER	7
RECURRENCE RATE, 1	4	CRYPTOVARIABLE LOGICAL LABEL	7
DELTA EPOCH, 1	2	A, TRANSEC	
PARTICIPATION GROUP, 2	9	CRYPTOVARIABLE LOGICAL LABEL	7
RECURRENCE RATE, 2	4	B, TRANSEC	
DELTA EPOCH, 2	2	EFFECTIVE FROM MINUTE	6
PARTICIPATION GROUP, 3	9	EFFECTIVE FROM HOUR	5
RECURRENCE RATE, 3	4	SPARE	1
DELTA EPOCH, 3	2	CRYPTOVARIABLE LOGICAL LABEL	7
PARTICIPATION GROUP, 4	9	C, MSEC	
RECURRENCE RATE, 4	4	CRYPTOVARIABLE LOGICAL LABEL	7
DELTA EPOCH, 4	2	D, MSEC	
		SPARE	3
<u>J0.6C2</u>		<u>J0.6C4</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	WORD FORMAT	2
CONTINUATION WORD LABEL	5	CONTINUATION WORD LABEL	5
NEEDLINE PARTICIPATION GROUP	4	ACTION CODE, CRYPTOVARIABLE	4
STATUS, 1		CRYPTOVARIABLE LOGICAL LABEL,	7
		MSEC INITIALIZATION	
		NET NUMBER, 1	7
		NET NUMBER, 2	7
		NET NUMBER, 3	7
		NET NUMBER, 4	7

MIL-STD-6016B

J0.6 MESSAGE SUMMARY (Continued)

DATA ELEMENT SUMMARY (Continued)

J0.6C4 (Continued)	
DATA ELEMENT	# BITS
NET NUMBER, 5	7
NET NUMBER, 6	7
NET NUMBER, 7	7
SPARE	3

MIL-STD-6016B

J0.6 TRANSMIT/RECEIVE RULES

TITLE: Communications Control Message

TRANSMIT RULES

1. The original J0.6 Communications Control message (R/C = 0) shall be transmitted by an authorized JU. It shall be transmitted once for each communications control action and it shall be addressed to a single unit. It shall specify an action to be taken by the receiving terminal as follows:

a. The J0.6 message with Action, Communication Control field set to value 0 is transmitted to request the transmission of specific single messages (the J0.1 or J2 Series message) by label and sublabel. It specifies the time slot to be used by the addressed terminal to transmit either the requested message or the appropriate machine response J0.6 message.

b. The J0.6 message with Action, Communication Control field set to value 3 with the J0.6C3 Cryptovvariable Logical Label continuation word is transmitted to change the Cryptovvariable Logical Labels of existing time slot and relay slot assignments of the addressed terminal. It specifies existing time slot and relay slot assignments by Participation Group Number and Net Number and indicates the time of implementation of the change. For the Voice Group A, Voice Group B, and Control Participation Groups a net number of No Statement specifies the existing slot assignment for the common slot assignments in these groups. Existing slot assignments in these groups with specified net numbers are changed using individual J0.6C3 words. (This message shall not be used to change the Cryptovvariable Logical Label of a Participation Group that is part of a Main Net Relay receive slot assignment unless it changes the Cryptovvariable Logical Labels for all Participation Groups in the Main Net Relay receive assignment and the Cryptovvariable Logical Label associated with the Main Net Relay receive assignment is changed as well.)

c. The J0.6 message with Action, Communication Control field set to value 3 with the J0.6C4 Net Number continuation word is transmitted to define the Cryptovvariable Logical Labels for specified nets on the Voice Group A, Voice Group B, or Control Participation Groups. It changes or adds to the

J0.6 TRANSMIT/RECEIVE RULES (Continued)

TRANSMIT RULES (Continued)

Net Number-Cryptovvariable Logical Label Association table which specifies cryptovvariables for specific nets for these Participation Groups on the common slot assignments designated by net number equal to No Statement. This message cannot change existing slot assignments.

2. The original J0.6 Communication Control message (R/C = 1) shall be transmitted as follows:

a. The J0.6 message with Action, Communication Control field set to value 1 is transmitted by an authorized JU once for each communications control action. It is transmitted to request the receiving host system transmit available information in the specified Participation Group Number within a specified time period. When the receiving host system fails to comply with the transmission request, the original J0.6 message (R/C = 1) is retransmitted in accordance with the protocols of the host system.

b. The J0.6 message with Action, Communication Control field set to value 2 is transmitted by the host of a JU to an authorized JU to indicate that transmission of the information in the specified Participation Group has been terminated. The message is transmitted to indicate to an authorized JU that it has complied with the request contained in a previously received J0.6 message with Action, Communication Control field set to value 1.

c. The J0.6 message with Action, Communication Control field set to value 3 with the J0.6C1 Time Slot Blocks Assignment/Deassignment continuation word is transmitted by the host system of a JU to request from an authorized JU the assignment of additional time slot blocks or the deassignment of time slot blocks or the reassignment of time slot blocks to the specified Participation Group. The message shall be addressed either to the JU address of the Network Manager or to 77777 (octal).

d. The J0.6 message with Action, Communication Control field set to value 3 and including the J0.6C2 Net Status Needline Participation Group Status continuation word is transmitted by the host of a JU to a Net Control

J0.6 TRANSMIT/RECEIVE RULES (Continued)

Station to indicate the fault condition of up to two Needlines assigned to the terminal and the operational status of the associated Net Status Needline Participation Groups.

RECEIVE RULES

1. When an original J0.6 message is received with the Action, Communication Control field set to value 0, the addressed terminal shall, if possible, comply with the action specified in the received message. It shall respond as follows:

a. It shall transmit the requested single message in the receipt/Compliance time slot specified in the received J0.6 message.

b. If it cannot transmit the requested single message it shall transmit the appropriate CANTPRO J0.6 message. It shall transmit a CANTPRO (R/C = 10) J0.6 message if the Participation Group is not defined. If the R/C = 10, CANTPRO, is not applicable, it shall transmit a CANTPRO (R/C = 7) J0.6 message.

2. When an original J0.6 message is received with the Action, Communication Control field set to value 3 with the J0.6C3 Cryptovvariable Logical Label continuation word or with the J0.6C4 Net Number continuation word, the addressed terminal shall, if possible, comply with the actions specified in the received message. It shall respond as follows:

a. It shall transmit a Machine Receipt J0.6 message (R/C = 2) if it can comply with the action specified in the received J0.6 message.

b. It shall transmit the appropriate CANTPRO J0.6 message if it cannot comply with the actions specified in the received J0.6 message. It shall transmit a CANTPRO (R/C = 10) J0.6 message if the Participation Group is not defined. It shall transmit a CANTPRO (R/C = 11) J0.6 message if it is to add to a Net Number Cryptovvariable Logical Label Association table that is full. It shall transmit a CANTPRO (R/C = 9) J0.6 message if the cryptovvariable is

J0.6 TRANSMIT/RECEIVE RULES (Continued)

RECEIVE RULES (Continued)

not held. If the R/C = 10 or R/C = 11 or R/C = 9 CANTPROs are not applicable, it shall transmit a CANTPRO (R/C = 7) J0.6 message.

3. When an original J0.6 message is received with the Action, Communication Control field set to value 1 or 2 there are no receive rules specified.

4. There are no receive rules specified for reception of an original J0.6 message with the Action, Communications Control field set to value 3 and containing the J0.6C2 Net Status Needline Participation Status continuation word.

5. A JU acting as Network Manager shall accept original J0.6 messages with the Action, Communication Control field set to value 3 and containing the J0.6C1 Time Slot Block Assignment/Deassignment continuation word which are addressed to its JU address or to 77777 (octal).

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: COMMUNICATIONS CONTROL INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00		
TRACK NUMBER, ADDRESSEE												:	MESSAGE		:	SUBLABEL,		:	LABEL, J-SERIES				:	WORD		:
												:	LENGTH		:	J-SERIES		:					:	FORMAT		:
												:	INDICATOR		:			:					:			:
15												:	3		:	3		:	5				:	2		:

49	48	47	46	45	44	43:	42	41:	40	39:	38	37	36:	35	34	33	32	31:	30	29	28:	27	26	25
PARTICIPATION GROUP						:	SP	:	COM CON:	SUBLABEL, J-SERIES REQUEST		:	LABEL, J-SERIES REQUEST				:	SPARE		:	---			
9						:	2	:	2	:	3	:	5				:	3	:					

:	69	68	67	66:	65	64	63	62	61:	60	59	58	57	56:	55	54	53	52:	51	50		
:	RECCURRENCE				:					:					:	TRANSMISSION				:		
:	RATE, RECEIPT/				:	RECEIPT/COMPLIANCE				:	SPARE				:	TERMINATION				:	---	
:	COMPLIANCE				:					:					:	DESIGNATOR				:		
:	4				:	5				:	5				:	4				:		

WORD DESCRIPTION

WORD NUMBER: J0.6I

WORD TITLE: COMMUNICATIONS CONTROL INITIAL WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	00
270	004	LABEL, J-SERIES	2-	6 5	00000
271	005	SUBLABEL, J-SERIES	7-	9 3	110
800	001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
769	006	TRACK NUMBER, ADDRESSEE	13-	27 15	
756	003	SPARE	28-	30 3	
270	007	LABEL, J-SERIES REQUEST	31-	35 5	ONLY VALUES ALLOWABLE ARE 0 OR 2.
271	007	SUBLABEL, J-SERIES REQUEST	36-	38 3	
1769	001	ACTION, COMMUNICATION CONTROL (COM CON)	39-	40 2	
756	002	SPARE (SP)	41-	42 2	
838	004	PARTICIPATION GROUP (PTC GRP)	43-	51 9	
1770	001	TRANSMISSION TERMINATION DESIGNATOR (TT DES)	52-	55 4	
756	005	SPARE	56-	60 5	
392	008	RECEIPT/COMPLIANCE	61-	65 5	
444	025	RECURRENCE RATE, RECEIPT/ COMPLIANCE (RRN R/C)	66-	69 4	

FIELD CODING FOR J0.6I

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	006	TRACK NUMBER, ADDRESSEE -----		THE TN OF A UNIT (I.E., JU OR PU) TO WHICH A MESSAGE IS ADDRESSED.
		NO STATEMENT NUMERIC	0 00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		ILLEGAL NUMERIC	00077 (OCTAL) 00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC	00177 (OCTAL)	COLLECTIVE ADDRESS.
		NUMERIC	00200 THROUGH 07776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL NUMERIC	07777 (OCTAL) 10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
270	007	LABEL, J-SERIES REQUEST -----		IDENTIFIES THE LABEL OF THE MESSAGE REQUESTED BY A JU TRANSMITTING THIS MESSAGE.
		SYSTEM INFORMATION EX- CHANGE AND NETWORK MANAGEMENT	0	
		ILLEGAL	1	
		PRECISE PARTICIPANT LOCATION AND IDENTIFICATION	2	
		ILLEGAL	3 THROUGH 31	
271	007	SUBLABEL, J-SERIES REQUEST -----		IDENTIFIES THE SUBLABEL OF THE MES- SAGE REQUESTED BY A JU TRANSMIT- TING THIS MESSAGE.
		----- FOR LABEL, LINK 16 REQUEST = 0 -----		

FIELD CODING FOR J0.6I

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
271	007	SUBLABEL, J-SERIES REQUEST -----	(CONTINUED)	
		ILLEGAL	0	
		TEST	1	
		ILLEGAL	2 THROUGH 7	

		FOR LABEL, LINK 16 REQUEST = 2 -----		
		ILLEGAL	0	
		UNDEFINED	1	
		AIR PPLI INITIAL WORD	2	
		SURFACE (MARITIME)	3	
		PPLI INITIAL WORD		
		SUBSURFACE (MARITIME)	4	
		PPLI INITIAL WORD		
		LAND (GROUND) POINT PPLI	5	
		INITIAL WORD		
		LAND (GROUND) TRACK PPLI	6	
		INITIAL WORD		
		UNDEFINED	7	
1769	001	ACTION, COMMUNICATION CONTROL -----		DESCRIBES THE COMMUNICATIONS CONTROL ACTION TO BE ACCOMPLISHED.
		TERMINAL INTERROGATION	0	THE RECEIVING TERMINAL IS TO TRANSMIT THE MESSAGE INDICATED IN THE TIME SLOT SPECIFIED. ONLY THE J0.1 OR J2 MESSAGES WITH AN APPROPRIATE SUBLABEL MAY BE REQUESTED.
		INITIATE TRANSMISSION	1	THE RECEIVING HOST SYSTEM IS TO TRANSMIT AVAILABLE INFORMATION IN THE PARTICIPATION GROUP INDICATED UNTIL ALL AVAILABLE INFORMATION HAS BEEN TRANSMITTED, OR UNTIL THE TIME PERIOD INDICATED BY THE TRANSMISSION TIME LIMIT GIVEN IN THE TRANSMISSION TERMINATION DESIGNATOR FIELD HAS EXPIRED.
		TERMINATE TRANSMISSION	2	THE RECEIVING HOST SYSTEM HAS TERMINATED TRANSMISSION OF THE INFORMATION IN THE PARTICIPATION GROUP INDICATED.

FIELD CODING FOR J0.6I

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1769	001	ACTION, COMMUNICATION CONTROL ----- CONTROL REQUEST	(CONTINUED) 3	THE RECEIVING HOST SYSTEM IS REQUESTED TO TAKE ACTION AS INDICATED IN THE CONTINUATION WORD.
838	004	PARTICIPATION GROUP -----		SPECIFIES THE INDEX NUMBER OF THE PARTICIPATION GROUP TO WHICH AN ASSIGNED BLOCK OF TIME SLOTS APPLY.
		NO STATEMENT	0	
		INITIAL ENTRY	1	
		RTT A	2	
		RTT B	3	
		NETWORK MANAGEMENT	4	
		PPLI AND STATUS GROUP A	5	
		PPLI AND STATUS GROUP B	6	
		SURVEILLANCE	7	
		MISSION MANAGEMENT/ WEAPONS COORDINATION	8	
		CONTROL	9	
		ELECTRONIC WARFARE	10	
		UNDEFINED	11	
		VOICE GROUP A	12	
		VOICE GROUP B	13	
		PARTICIPATION GROUPS 14 THROUGH 18	14 THROUGH 18	DEFINED BY INTERFACE OPERATING PROCEDURES AND TACTICAL COMMUNICATIONS PLAN.
		NONC2 JU-TO-NONC2 JU A	19	
		NONC2 JU-TO-NONC2 JU B	20	
		ENGAGEMENT COORDINATION	21	
		COMPOSITE A	22	
		COMPOSITE B	23	
		PARTICIPATION GROUPS 24 THROUGH 26	24 THROUGH 26	DEFINED BY INTERFACE OPERATING PROCEDURES AND TACTICAL COMMUNICATIONS PLAN.
		JOINT NET PPLI	27	
		DISTRIBUTED NETWORK MANAGEMENT	28	
		RESIDUAL MESSAGES	29	
		IJMS POSITION AND STATUS	30	
		OTHER IJMS	31	
		PARTICIPATION GROUPS 32 THROUGH 509	32 THROUGH 509	DEFINED BY INTERFACE OPERATING PROCEDURES AND TACTICAL

		FIELD CODING FOR J0.6I		(SHEET 4)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
838	004	PARTICIPATION GROUP -----	(CONTINUED)	
		NET CONTROL NEEDLINE	510	COMMUNICATIONS PLAN.
		NET STATUS NEEDLINE	511	
1770	001	TRANSMISSION TERMINATION DESIGNATOR -----		DEFINES THE MAXIMUM TIME ALLOWABLE FOR MESSAGE TRANSMISSION IN THE PARTICIPATION GROUP INDICATED.
		NO TIME LIMIT SPECIFIED	0	THE RECEIVING HOST SYSTEM IS TO TRANSMIT ALL AVAILABLE INFORMATION IN THE PARTICIPATION GROUP INDICATED TAKING WHATEVER TIME PERIOD THAT IS REQUIRED.
		RECURRENCE RATE NUMBER FOR COMPUTING TRANS- MISSION TIME LIMIT	1 THROUGH 15	THE RECEIVING HOST SYSTEM IS TO TRANSMIT ALL AVAILABLE INFORMATION IN THE PARTICIPATION GROUP INDICATED FOR A TIME PERIOD IN SECONDS NOT TO EXCEED 3 X (2 TO THE POWER (8-RRN)).
392	008	RECEIPT/COMPLIANCE -----		
		ORIGINAL ORDER	0	RECEIPT/COMPLIANCE RESPONSE REQUIRED.
		ORIGINAL ORDER	1	RECEIPT/COMPLIANCE RESPONSE NOT REQUIRED. MUST BE USED IN CONJUNCTION WITH ORIGINAL ORDER MESSAGES ADDRESSED TO COLLECTIVE ADDRESSES. THE ORIGINAL ORDER SHALL BE TRANSMITTED 3 TIMES.
		MACHINE RECEIPT	2	MESSAGE RECEIVED ERROR FREE.
		WILCO (WILL COMPLY)	3	THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER WILL COMPLY. IN THIS USAGE, THE SYSTEM COMPONENT IS A HUMAN OPERATOR OR (UNMANNED VEHICLE ONLY) A MACHINE.
		HAVCO (HAVE COMPLIED)	4	THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER HAS COMPLIED. IN THIS USAGE, THE SYSTEM COMPONENT MAY BE A HUMAN OPERATOR OR A MACHINE.
		ORIGINAL ORDER	5	RECEIPT/COMPLIANCE RESPONSE (MR AND/ OR CANTPRO ONLY) REQUIRED.
		CANTCO (CANNOT COMPLY)	6	THE SYSTEM COMPONENT REQUIRED TO

FIELD CODING FOR J0.6I				(SHEET 5)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
		CANTPRO (CANNOT PROCESS)	7	TAKE ACTION UNDER THIS ORDER CANNOT COMPLY. IN THIS USAGE, THE SYSTEM COMPONENT IS A HUMAN OPERATOR OR (UNMANNED VEHICLE ONLY) A MACHINE.
		CANTPRO (CANNOT PROCESS)	8	NON-SPECIFIC SYSTEM LIMITATION OR CONFLICT. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	9	TIME SLOT ASSIGNMENT CONFLICT DETECTED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	10	CRYPTOVARIABLE NOT HELD. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	11	PARTICIPATION GROUP NOT DEFINED. THIS IS AN AUTOMATIC COMPUTER- GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	12	APPLICABLE ASSIGNMENT TABLE FULL. THIS IS AN AUTOMATIC COMPUTER- GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
				RELAY FUNCTION SPECIFIED ALREADY HAS ASSIGNED TIME SLOT BLOCKS FOR WHICH A DIFFERENT RELAY MODE/NET NUMBER HAS BEEN SPECIFIED. THIS

FIELD CODING FOR J0.6I

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
		CANTPRO (CANNOT PROCESS)	13	IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	14	INTERFERENCE PROTECTION FEATURES WOULD BE VIOLATED BY ACCEPTANCE OF ASSIGNMENT. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	15	HOST SUBSCRIBER INTERFACE IS INACTIVE AND MESSAGE IS NOT PROCESSED BY THE TERMINAL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	16	TN, ADDRESSEE DOES NOT IMPLEMENT THE ACTION REQUESTED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	17	ONE OR MORE TNS IN THE OM NOT HELD. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	18	TN, REFERENCE OR TN, FRIENDLY WEAPON IS UNDER OWN UNIT CONTROL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
				UNIT NOT EXERCISING AIR CONTROL

FIELD CODING FOR J0.6I

(SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
		CANTPRO (CANNOT PROCESS)	19	CAPABILITY. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	20	UNACCEPTABLE IDENTITY. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	21	ADDRESSEE TN IS INACTIVE. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	22	THE FORWARDING UNIT DID NOT RECEIVE A MACHINE RECEIPT FROM THE ADDRESSEE TN. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		UNDEFINED NO STATEMENT	23 THROUGH 30 31	TN, REFERENCE OR TN, FRIENDLY WEAPON IS NOT UNDER THIS UNIT'S CONTROL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
444	025	RECURRENCE RATE, RECEIPT/ COMPLIANCE -----		IDENTIFIES THE TIME SLOT IN WHICH THE RECEIPT/COMPLIANCE FOR THE MESSAGE IS TO BE TRANSMITTED.
		NO STATEMENT	0	
		NUMERIC	1 THROUGH 15	THE NUMERIC VALUE FOR RECEIPT/COMPLIANCE, SPECIFIED AS

FIELD CODING FOR J0.6I				(SHEET 8)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
444	025	RECURRENCE RATE, RECEIPT/ COMPLIANCE -----	(CONTINUED)	RECURRENCE RATE NUMBER, DEFINES THE NUMBER N OF CONSECUTIVE TIME SLOTS FROM THE ORIGINAL TRANSMISSION TO THE DONATED TIME SLOT: N=3X2 TO THE (15-RRN) POWER.

WORD TITLE: TIME SLOT BLOCKS ASSIGNMENT/DEASSIGNMENT CONTINUATION WORD

:	24	: 23:	22		21		20		19:	18		17		16		15		14		13		12		11		10:	09:	08		07:	06		05		04		03		02:	01		00:				
:	DELTA :		RECURRENCE :																							:	:		:	CONTINUATION WORD :		WORD :														
:	EPOCH,	:	RATE, 1	:						PARTICIPATION GROUP, 1																:	SP :	ACT TSR:		LABEL											:	FORMAT :				
:	1	:		:																						:	:		:												:					
:	2	:			4	:												9								:	1 :	2	:				5							:	2	:				

49:	48	47	46	45	44	43	42	41	40:	39	38:	37	36	35	34:	33	32	31	30	29	28	27	26	25:		
<---	:	PARTICIPATION GROUP, 3								:	DELTA	:	RECURRENCE RATE, 2				:	PARTICIPATION GROUP, 2								:
:	:									:	2	:					:									:
:	:	9								:	2	:	4				:	9								:

: 69	68:	67	66	65	64:	63	62	61	60	59	58	57	56	55:	54	53:	52	51	50		
: DELTA :	RECURRENCE				:	PARTICIPATION GROUP, 4									: DELTA :	RECURRENCE					
: EPOCH,	:	RATE, 4				:										: EPOCH,	:	RATE, 3			
: 4 :					:										: 3 :						
: 2 :	4				:	9									: 2 :	4					

WORD DESCRIPTION

WORD NUMBER: J0.6C1

WORD TITLE: TIME SLOT BLOCKS ASSIGNMENT/DEASSIGNMENT CONTINUATION WORD

REFERENCE		BIT #	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0- 1 2	01
1551 001	CONTINUATION WORD LABEL	2- 6 5	00001
1771 001	ACTION, TIME SLOT REQUEST (ACT TSR)	7- 8 2	
756 001	SPARE (SP)	9 1	
838 002	PARTICIPATION GROUP, 1	10- 18 9	
444 002	RECURRENCE RATE, 1	19- 22 4	
1615 002	DELTA EPOCH, 1 (DEL EP1)	23- 24 2	
838 003	PARTICIPATION GROUP, 2	25- 33 9	SAME CODING AS FOR BITS 10-18.
444 003	RECURRENCE RATE, 2	34- 37 4	SAME CODING AS FOR BITS 19-22.
1615 003	DELTA EPOCH, 2 (DEL EP2)	38- 39 2	SAME CODING AS FOR BITS 23 AND 24.
838 005	PARTICIPATION GROUP, 3	40- 48 9	SAME CODING AS FOR BITS 10-18.
444 005	RECURRENCE RATE, 3	49- 52 4	SAME CODING AS FOR BITS 19-22.
1615 004	DELTA EPOCH, 3 (DEL EP3)	53- 54 2	SAME CODING AS FOR BITS 23 AND 24.
838 006	PARTICIPATION GROUP, 4	55- 63 9	SAME CODING AS FOR BITS 10-18.
444 004	RECURRENCE RATE, 4	64- 67 4	SAME CODING AS FOR BITS 19-22.
1615 005	DELTA EPOCH, 4 (DEL EP4)	68- 69 2	SAME CODING AS FOR BITS 23 AND 24.

FIELD CODING FOR J0.6C1

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1771	001	ACTION, TIME SLOT REQUEST -----		DESCRIBES THE TIME SLOT ASSIGNMENT ACTION THAT IS BEING REQUESTED.
		ASSIGNMENT REQUEST	0	THE ORIGINATOR OF THIS MESSAGE REQUESTS ASSIGNMENT OF ADDITIONAL TIME SLOT BLOCKS AS INDICATED.
		DEASSIGNMENT REQUEST	1	THE ORIGINATOR OF THIS MESSAGE CAN RELEASE THE INDICATED TIME SLOT BLOCKS.
		REASSIGNMENT REQUEST	2	THE ORIGINATOR OF THIS MESSAGE REQUESTS THE REASSIGNMENT OF THE INDICATED TIME SLOT BLOCKS TO THE PARTICIPATION GROUP GIVEN IN THE INITIAL WORD.
		UNDEFINED	3	
838	002	PARTICIPATION GROUP, 1 -----		SPECIFIES THE PARTICIPATION GROUP TO WHICH AN ASSIGNED BLOCK OF TIME SLOTS APPLY.
		NO STATEMENT	0	
		INITIAL ENTRY	1	
		RTT A	2	
		RTT B	3	
		NETWORK MANAGEMENT	4	
		PPLI AND STATUS GROUP A	5	
		PPLI AND STATUS GROUP B	6	
		SURVEILLANCE	7	
		MISSION MANAGEMENT/ WEAPONS COORDINATION	8	
		CONTROL	9	
		ELECTRONIC WARFARE	10	
		UNDEFINED	11	
		VOICE GROUP A	12	
		VOICE GROUP B	13	
		PARTICIPATION GROUPS 14 THROUGH 18	14 THROUGH 18	DEFINED BY INTERFACE OPERATING PROCEDURES AND TACTICAL COMMUNICATIONS PLAN.
		NONC2 JU-TO-NONC2 JU A	19	
		NONC2 JU-TO-NONC2 JU B	20	
		ENGAGEMENT COORDINATION	21	
		COMPOSITE A	22	
		COMPOSITE B	23	
		PARTICIPATION GROUPS 24 THROUGH 26	24 THROUGH 26	DEFINED BY INTERFACE OPERATING PROCEDURES AND TACTICAL COMMUNICATIONS PLAN.
		JOINT NET PPLI	27	

FIELD CODING FOR J0.6C1

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
838	002	PARTICIPATION GROUP, 1 -----	(CONTINUED)	
		DISTRIBUTED NETWORK MANAGEMENT	28	
		RESIDUAL MESSAGES	29	
		IJMS POSITION AND STATUS	30	
		OTHER IJMS	31	
		PARTICIPATION GROUPS 32 THROUGH 509	32 THROUGH 509	DEFINED BY INTERFACE OPERATING PROCEDURES AND TACTICAL COMMUNICATIONS PLAN.
		NET CONTROL NEEDLINE	510	
		NET STATUS NEEDLINE	511	
444	002	RECURRENCE RATE, 1 -----		EXPRESSES A NUMBER 'N' WHICH, AS PART OF A TIME SLOT ASSIGNMENT, ESTABLISHES THE NUMBER OF ASSIGNED TIME SLOTS SPACED UNIFORMLY OVER EACH EPOCH.
		1 TIME SLOT PER EPOCH	0	
		2 THROUGH 32,768 TIME SLOTS PER EPOCH	1 THROUGH 15	EXPRESSED AS A POWER OF 2, I.E. BIT CODE 1=2 TO THE FIRST POWER, BIT CODE 2=2 TO THE SECOND POWER, ETC.
1615	002	DELTA EPOCH, 1 -----		
		CURRENT EPOCH	0	
		1 EPOCH FROM THE CURRENT EPOCH	1	
		2 EPOCHS FROM THE CURRENT EPOCH	2	
		3 EPOCHS FROM THE CURRENT EPOCH	3	

WORD MAP

WORD NUMBER: J0.6C2

WORD TITLE: NET STATUS NEEDLINE PARTICIPATION GROUP STATUS CONTINUATION
WORD

24	23	22:	21	20	19	18	17	16	15	14:	13	12	11:	10	09	08	07:	06	05	04	03	02:	01	00:			
<---			:	TEST DURATION COUNT, 1							:	NPG SA1			:	NPG ST1			:	CONTINUATION WORD LABEL				:	WORD FORMAT		:
			:	8							:	3			:	4			:	5				:	2		:
49	48	47	46:	45	44	43	42	41	40	39	38:	37	36	35:	34	33	32	31:	30	29	28	27	26	25			
<---			:	TEST DURATION COUNT, 2							:	NPG SA2			:	NPG ST2			:	PARTICIPATION GROUP, 1							:
			:	8							:	3			:	4			:	9							:
			:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55:	54	53	52	51	50				
			:	SPARE															:	PARTICIPATION GROUP, 2					:		
			:																:						:		
			:	15															:	9					:		

WORD DESCRIPTION

WORD NUMBER: J0.6C2

WORD TITLE: NET STATUS NEEDLINE PARTICIPATION GROUP STATUS CONTINUATION
WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	01
1551	001	CONTINUATION WORD LABEL	2-	6 5	00010
1789	001	NEEDLINE PARTICIPATION GROUP STATUS, 1 (NPG ST1)	7-	10 4	
1790	001	NEEDLINE PARTICIPATION GROUP STATUS AMPLIFY, 1 (NPG SA1)	11-	13 3	
1791	001	TEST DURATION COUNT, 1	14-	21 8	
838	002	PARTICIPATION GROUP, 1	22-	30 9	
1789	002	NEEDLINE PARTICIPATION GROUP STATUS, 2 (NPG ST2)	31-	34 4	SAME CODING AS FOR BITS 7-10.
1790	002	NEEDLINE PARTICIPATION GROUP STATUS AMPLIFY, 2 (NPG SA2)	35-	37 3	SAME CODING AS FOR BITS 11-13.
1791	002	TEST DURATION COUNT, 2	38-	45 8	SAME CODING AS FOR BITS 14-21.
838	003	PARTICIPATION GROUP, 2	46-	54 9	SAME CODING AS FOR BITS 22-30.
756	015	SPARE	55-	69 15	

FIELD CODING FOR J0.6C2

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1789	001	NEEDLINE PARTICIPATION GROUP STATUS, 1 -----		INDICATES TO THE NET CONTROL STATION THE FAULT CONDITION OF A NEEDLINE ASSIGNED TO THE TERMINAL.
		NO STATEMENT	0	
		PATH FAILURE	1	INDICATES A FAILURE OF A NEEDLINE PATH AND IMPLIES THAT CORRECTIVE ACTION SHOULD BE TAKEN.
		BACKUP	2	INDICATES A BACKUP OF MESSAGE TRAFFIC HAS OCCURRED ON THE ASSIGNED NEEDLINE AND IMPLIES THAT AN INCREASED CAPACITY ALLOCATION IS NEEDED.
		RESPONSE TIME EXCEEDED	3	INDICATES THAT THE TIME REQUIRED TO DELIVER A COMPLETE MESSAGE TO THE NEEDLINE DESTINATION HAS EXCEEDED THE NORMAL REQUIRED RESPONSE TIME ASSOCIATED WITH THE NEEDLINE BY 2(1-8, 0.1) TIMES.
		UNDEFINED	4 THROUGH 15	
1790	001	NEEDLINE PARTICIPATION GROUP STATUS AMPLIFY, 1 -----		INDICATES THE OPERATIONAL STATUS OF THE ASSOCIATED NET STATUS NEEDLINE PG.
		NO STATEMENT	0	
		NO FAILURE	1	INDICATES NO FAILURE OF PATHS HAS OCCURRED ON THE ASSOCIATED NET STATUS NEEDLINE PG.
		DIRECTED ZERO PATH FAILURE	2	INDICATES A FAILURE OF A DIRECTED ZERO PATH HAS OCCURRED ON THE ASSOCIATED NET STATUS NEEDLINE PG.
		DIRECTED ONE PATH FAILURE	3	INDICATES A FAILURE OF A DIRECTED ONE PATH HAS OCCURRED ON THE ASSOCIATED NET STATUS NEEDLINE PG.
		NONDIRECTED PATH FAILURE	4	INDICATES A FAILURE OF A NONDIRECTED PATH HAS OCCURRED ON THE ASSOCIATED NET STATUS NEEDLINE PG.
		UNDEFINED	5 THROUGH 7	
1791	001	TEST DURATION COUNT, 1 -----		INDICATES THE FINAL VALUE REACHED IN THE COUNT DURING SEQUENTIAL HYPO- THESIS TEST AT THE TIME THE FAIL- URE DECISION IS MADE.
		NO STATEMENT	0	
		TEST COUNT	1 THROUGH 255	IN ONE NUMBER INCREMENTS.

FIELD CODING FOR J0.6C2

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
838	002	PARTICIPATION GROUP, 1 -----		SPECIFIES THE PARTICIPATION GROUP TO WHICH AN ASSIGNED BLOCK OF TIME SLOTS APPLY.
		NO STATEMENT	0	
		INITIAL ENTRY	1	
		RTT A	2	
		RTT B	3	
		NETWORK MANAGEMENT	4	
		PPLI AND STATUS GROUP A	5	
		PPLI AND STATUS GROUP B	6	
		SURVEILLANCE	7	
		MISSION MANAGEMENT/ WEAPONS COORDINATION	8	
		CONTROL	9	
		ELECTRONIC WARFARE	10	
		UNDEFINED	11	
		VOICE GROUP A	12	
		VOICE GROUP B	13	
		PARTICIPATION GROUPS 14 THROUGH 18	14 THROUGH 18	DEFINED BY INTERFACE OPERATING PROCEDURES AND TACTICAL COMMUNICATIONS PLAN.
		NONC2 JU-TO-NONC2 JU A	19	
		NONC2 JU-TO-NONC2 JU B	20	
		ENGAGEMENT COORDINATION	21	
		COMPOSITE A	22	
		COMPOSITE B	23	
		PARTICIPATION GROUPS 24 THROUGH 26	24 THROUGH 26	DEFINED BY INTERFACE OPERATING PROCEDURES AND TACTICAL COMMUNICATIONS PLAN.
		JOINT NET PPLI	27	
		DISTRIBUTED NETWORK MANAGEMENT	28	
		RESIDUAL MESSAGES	29	
		IJMS POSITION AND STATUS	30	
		OTHER IJMS	31	
		PARTICIPATION GROUPS 32 THROUGH 509	32 THROUGH 509	DEFINED BY INTERFACE OPERATING PROCEDURES AND TACTICAL COMMUNICATIONS PLAN.
		NET CONTROL NEEDLINE	510	
		NET STATUS NEEDLINE	511	

.....

WORD TITLE: CRYPTOVARIABLE LOGICAL LABEL CONTINUATION WORD

24	23	22	21	20:	19	18	17	16	15	14	13	12	11:	10	09	08	07:	06	05	04	03	02:	01	00			
NET NUMBER				:	PARTICIPATION GROUP								:	ACTION CODE, CRYPTOVARIABLE				:	CONTINUATION WORD LABEL				:	WORD	:	FORMAT	:
7				:	9								:	4				:	5				:	2	:		

49	48	47:	46	45	44	43	42	41:	40	39	38	37	36	35	34:	33	32	31	30	29	28	27:	26	25
EFFECTIVE :									CRYPTOVARIABLE LOGICAL :			CRYPTOVARIABLE LOGICAL :												
FROM HOUR :			EFFECTIVE FROM MINUTE :						LABEL B, TRANSEC :			LABEL A, TRANSEC :						---						
5			:	6						:	7						:	7						:

:	69	68	67:	66	65	64	63	62	61	60:	59	58	57	56	55	54	53:	52:	51	50				
:				CRYPTOVARIABLE LOGICAL							CRYPTOVARIABLE LOGICAL							:	:					
:	SPARE			:	LABEL D, MSEC							:	LABEL C, MSEC							:	SP	:	---	>
:				:								:								:	:			
:	3			:	7							:	7							:	1			

WORD DESCRIPTION

WORD NUMBER: J0.6C3

WORD TITLE: CRYPTOVARIABLE LOGICAL LABEL CONTINUATION WORD

REFERENCE			BIT	#	
DFI/DUI	DATA FIELD	DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD	FORMAT	0-	1 2	01
1551 001	CONTINUATION	WORD LABEL	2-	6 5	00011
897 001	ACTION	CODE, CRYPTOVARIABLE	7-	10 4	
838 004	PARTICIPATION	GROUP (PTC GRP)	11-	19 9	
348 001	NET	NUMBER	20-	26 7	
801 007	CRYPTOVARIABLE	LOGICAL LABEL	27-	33 7	
	A, TRANSEC				
801 008	CRYPTOVARIABLE	LOGICAL LABEL	34-	40 7	SAME CODING AS FOR BITS 27-33.
	B, TRANSEC				
797 001	EFFECTIVE	FROM MINUTE	41-	46 6	
792 002	EFFECTIVE	FROM HOUR	47-	51 5	
756 001	SPARE	(SP)	52	1	
801 009	CRYPTOVARIABLE	LOGICAL LABEL	53-	59 7	SAME CODING AS FOR BITS 27-33.
	C, MSEC				
801 010	CRYPTOVARIABLE	LOGICAL LABEL	60-	66 7	SAME CODING AS FOR BITS 27-33.
	D, MSEC				
756 003	SPARE		67-	69 3	

FIELD CODING FOR J0.6C3

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
897	001	ACTION CODE, CRYPTOVARIABLE -----		WHEN NET NUMBER AND/OR PARTICIPATION GROUP FIELDS ARE SET TO NO STATEMENT, THE INDICATED ACTION CODE APPLIES TO ALL NET NUMBERS AND/OR ALL PARTICIPATION GROUPS. WHEN CRYPTOVARIABLE LOGICAL LABEL B AND/OR D ARE SET TO NO STATEMENT, THE CRYPTOVARIABLE LOGICAL LABEL A AND/OR C SHALL BE USED.
		NO STATEMENT	0	
		ACTION ONE	1	USE TRANSEC CRYPTOVARIABLE LOGICAL LABEL A INSTEAD OF TRANSEC CRYPTOVARIABLE LOGICAL LABEL B AND MSEC CRYPTOVARIABLE LOGICAL LABEL C INSTEAD OF MSEC CRYPTOVARIABLE LOGICAL LABEL D ON THE INDICATED PARTICIPATION GROUPS ON THE INDICATED NETS AT THE INDICATED TIME. ILLEGAL FOR J0.6C4 CONTINUATION WORD.
		ACTION TWO	2	USE TRANSEC CRYPTOVARIABLE LOGICAL LABEL A INSTEAD OF TRANSEC CRYPTOVARIABLE LOGICAL LABEL B AND MSEC CRYPTOVARIABLE LOGICAL LABEL C INSTEAD OF MSEC CRYPTOVARIABLE LOGICAL LABEL D AND CHANGE TO INDICATED NETS ON INDICATED PARTICIPATION GROUP AT THE INDICATED TIME. ILLEGAL FOR THE J0.6C4 CONTINUATION WORD.
		ACTION THREE	3	USE CRYPTOVARIABLE LOGICAL LABEL, MSEC INITIALIZATION FOR VOICE A, VOICE B, AND CONTROL ON THE INDICATED NETS AT THE INDICATED TIME. ILLEGAL FOR J0.6C3 CONTINUATION WORD.
		ACTION FOUR	4	USE CRYPTOVARIABLE LOGICAL LABEL, MSEC INITIALIZATION FOR VOICE A ONLY ON THE INDICATED NETS AT THE INDICATED TIME. ILLEGAL FOR J0.6C3 CONTINUATION WORD.
		ACTION FIVE	5	USE CRYPTOVARIABLE LOGICAL LABEL, MSEC INITIALIZATION FOR VOICE B ONLY ON THE INDICATED NETS AT THE INDICATED TIME. ILLEGAL FOR

FIELD CODING FOR J0.6C3

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
897	001	ACTION CODE, CRYPTOVARIABLE -----	(CONTINUED)	
		ACTION SIX	6	J0.6C3 CONTINUATION WORD. USE CRYPTOVARIABLE LOGICAL LABEL, MSEC INITIALIZATION FOR CONTROL ONLY ON THE INDICATED NETS AT THE INDICATED TIME. ILLEGAL FOR J0.6C3 CONTINUATION WORD.
		ACTION SEVEN	7	USE CRYPTOVARIABLE LOGICAL LABEL, MSEC INITIALIZATION FOR VOICE A AND CONTROL ON THE INDICATED NETS AT THE INDICATED TIME. ILLEGAL FOR J0.6C3 CONTINUATION WORD.
		ACTION EIGHT	8	USE CRYPTOVARIABLE LOGICAL LABEL, MSEC INITIALIZATION FOR VOICE B AND CONTROL ON THE INDICATED NETS AT THE INDICATED TIME. ILLEGAL FOR J0.6C3 CONTINUATION WORD.
		ACTION NINE	9	USE CRYPTOVARIABLE LOGICAL LABEL, MSEC INITIALIZATION FOR VOICE A AND VOICE B ON THE INDICATED NETS AT THE INDICATED TIME. ILLEGAL FOR J0.6C3 CONTINUATION WORD.
		UNDEFINED	10 THROUGH 15	
838	004	PARTICIPATION GROUP -----		SPECIFIES THE INDEX NUMBER OF THE PARTICIPATION GROUP TO WHICH AN ASSIGNED BLOCK OF TIME SLOTS APPLY.
		NO STATEMENT	0	
		INITIAL ENTRY	1	
		RTT A	2	
		RTT B	3	
		NETWORK MANAGEMENT	4	
		PPLI AND STATUS GROUP A	5	
		PPLI AND STATUS GROUP B	6	
		SURVEILLANCE	7	
		MISSION MANAGEMENT/ WEAPONS COORDINATION	8	
		CONTROL	9	
		ELECTRONIC WARFARE	10	
		UNDEFINED	11	
		VOICE GROUP A	12	
		VOICE GROUP B	13	

FIELD CODING FOR J0.6C3

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
838	004	PARTICIPATION GROUP -----	(CONTINUED)	
		PARTICIPATION GROUPS 14 THROUGH 18	14 THROUGH 18	DEFINED BY INTERFACE OPERATING PROCEDURES AND TACTICAL COMMUNICATIONS PLAN.
		NONC2 JU-TO-NONC2 JU A	19	
		NONC2 JU-TO-NONC2 JU B	20	
		ENGAGEMENT COORDINATION	21	
		COMPOSITE A	22	
		COMPOSITE B	23	
		PARTICIPATION GROUPS 24 THROUGH 26	24 THROUGH 26	DEFINED BY INTERFACE OPERATING PROCEDURES AND TACTICAL COMMUNICATIONS PLAN.
		JOINT NET PPLI	27	
		DISTRIBUTED NETWORK MANAGEMENT	28	
		RESIDUAL MESSAGES	29	
		IJMS POSITION AND STATUS	30	
		OTHER IJMS	31	
		PARTICIPATION GROUPS 32 THROUGH 509	32 THROUGH 509	DEFINED BY INTERFACE OPERATING PROCEDURES AND TACTICAL COMMUNICATIONS PLAN.
		NET CONTROL NEEDLINE	510	
		NET STATUS NEEDLINE	511	
348	001	NET NUMBER -----		
		NUMERIC	0 THROUGH 126	
		NO STATEMENT	127	
801	007	CRYPTOVARIABLE LOGICAL LABEL A, TRANSEC -----		A LOGICAL LABEL USED TO UNIQUELY IDENTIFY THE CRYPTOVARIABLE TO BE USED IN ACCORDANCE WITH THE ASSOCIATED CRYPTOVARIABLE ACTION CODE.
		NO STATEMENT	0	
		LOGICAL LABEL	1 THROUGH 127	
797	001	EFFECTIVE FROM MINUTE -----		THE MINUTE THAT AN ASSIGNMENT, ETC., OR CANCELLATION IS TO BECOME EFFECTIVE. IN ONE MINUTE INCREMENTS.
		0 THROUGH 59	0 THROUGH 59	
		ILLEGAL	60 THROUGH 62	
		NO STATEMENT	63	

5.1-132

MIL-STD-6016B

FIELD CODING FOR J0.6C3 (SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
792	002	EFFECTIVE FROM HOUR -----		THE HOUR OF THE DAY THAT AN ASSIGN- MENT, ETC., OR CANCELLATION IS TO BECOME EFFECTIVE.
		0 HOUR	0	
		1 THROUGH 23 HOURS	1 THROUGH 23	IN ONE HOUR INCREMENTS.
		ILLEGAL	24 THROUGH 30	
		NO STATEMENT	31	

WORD MAP

WORD NUMBER: J0.6C4

WORD TITLE: NET NUMBER CONTINUATION WORD

: 24 23 22 21 20 19 18: 17 16 15 14 13 12 11: 10 09 08 07: 06 05 04 03 02: 01 00:																											
: NET NUMBER, 1 :																		: CRYPTOVARIABLE LOGICAL :					: ACTION CODE, :				
: LABEL, MSEC INITIALIZATION :																		: CRYPTOVARIABLE :					: CONTINUATION WORD :				
: LABEL :																		: LABEL :					: WORD :				
: FORMAT :																		: :					: :				
: 7 :																		: 7 :					: 4 :				
: 5 :																		: 2 :					: :				

: 49 48 47 46: 45 44 43 42 41 40 39: 38 37 36 35 34 33 32: 31 30 29 28 27 26 25:																											
: NET NUMBER, 5 :																		: NET NUMBER, 4 :					: NET NUMBER, 3 :				
: NET NUMBER, 2 :																		: :					: :				
: 7 :																		: 7 :					: 7 :				
: 7 :																		: :					: :				

: 69 68 67: 66 65 64 63 62 61 60: 59 58 57 56 55 54 53: 52 51 50																											
: SPARE :																		: NET NUMBER, 7 :					: NET NUMBER, 6 :				
: NET NUMBER, 6 :																		: :					: --->				
: 3 :																		: 7 :					: 7 :				
: :																		: :					: :				

--->

WORD DESCRIPTION

WORD NUMBER: J0.6C4

WORD TITLE: NET NUMBER CONTINUATION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550 001		WORD FORMAT	0-	1 2	01
1551 001		CONTINUATION WORD LABEL	2-	6 5	00100
897 001		ACTION CODE, CRYPTOVARIABLE	7-	10 4	
801 006		CRYPTOVARIABLE LOGICAL LABEL, MSEC INITIALIZATION	11-	17 7	
348 013		NET NUMBER, 1	18-	24 7	
348 014		NET NUMBER, 2	25-	31 7	SAME CODING AS FOR BITS 18-24.
348 008		NET NUMBER, 3	32-	38 7	SAME CODING AS FOR BITS 18-24.
348 015		NET NUMBER, 4	39-	45 7	SAME CODING AS FOR BITS 18-24.
348 016		NET NUMBER, 5	46-	52 7	SAME CODING AS FOR BITS 18-24.
348 017		NET NUMBER, 6	53-	59 7	SAME CODING AS FOR BITS 18-24.
348 023		NET NUMBER, 7	60-	66 7	SAME CODING AS FOR BITS 18-24.
756 003		SPARE	67-	69 3	

FIELD CODING FOR J0.6C4

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
897	001	ACTION CODE, CRYPTOVARIABLE -----		WHEN NET NUMBER AND/OR PARTICIPATION GROUP FIELDS ARE SET TO NO STATE- MENT, THE INDICATED ACTION CODE APPLIES TO ALL NET NUMBERS AND/OR ALL PARTICIPATION GROUPS. WHEN CRYPTOVARIABLE LOGICAL LABEL B AND/OR D ARE SET TO NO STATEMENT, THE CRYPTOVARIABLE LOGICAL LABEL A AND/OR C SHALL BE USED.
		NO STATEMENT	0	
		ACTION ONE	1	USE TRANSEC CRYPTOVARIABLE LOGICAL LABEL A INSTEAD OF TRANSEC CRYPTO- VARIABLE LOGICAL LABEL B AND MSEC CRYPTOVARIABLE LOGICAL LABEL C INSTEAD OF MSEC CRYPTOVARIABLE LOGICAL LABEL D ON THE INDICATED PARTICIPATION GROUPS ON THE INDICATED NETS AT THE INDICATED TIME. ILLEGAL FOR J0.6C4 CONTINUATION WORD.
		ACTION TWO	2	USE TRANSEC CRYPTOVARIABLE LOGICAL LABEL A INSTEAD OF TRANSEC CRYPTOVARIABLE LOGICAL LABEL B AND MSEC CRYPTOVARIABLE LOGICAL LABEL C INSTEAD OF MSEC CRYPTOVARIABLE LOGICAL LABEL D AND CHANGE TO INDICATED NETS ON INDICATED PARTICIPATION GROUP AT THE INDICATED TIME. ILLEGAL FOR THE J0.6C4 CONTINUATION WORD.
		ACTION THREE	3	USE CRYPTOVARIABLE LOGICAL LABEL, MSEC INITIALIZATION FOR VOICE A, VOICE B, AND CONTROL ON THE INDICATED NETS AT THE INDICATED TIME. ILLEGAL FOR J0.6C3 CONTINUATION WORD.
		ACTION FOUR	4	USE CRYPTOVARIABLE LOGICAL LABEL, MSEC INITIALIZATION FOR VOICE A ONLY ON THE INDICATED NETS AT THE INDICATED TIME. ILLEGAL FOR J0.6C3 CONTINUATION WORD.
		ACTION FIVE	5	USE CRYPTOVARIABLE LOGICAL LABEL, MSEC INITIALIZATION FOR VOICE B ONLY ON THE INDICATED NETS AT THE INDICATED TIME. ILLEGAL FOR

FIELD CODING FOR J0.6C4

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
897	001	ACTION CODE, CRYPTOVARIABLE -----	(CONTINUED)	
		ACTION SIX	6	J0.6C3 CONTINUATION WORD. USE CRYPTOVARIABLE LOGICAL LABEL, MSEC INITIALIZATION FOR CONTROL ONLY ON THE INDICATED NETS AT THE INDICATED TIME. ILLEGAL FOR J0.6C3 CONTINUATION WORD.
		ACTION SEVEN	7	USE CRYPTOVARIABLE LOGICAL LABEL, MSEC INITIALIZATION FOR VOICE A AND CONTROL ON THE INDICATED NETS AT THE INDICATED TIME. ILLEGAL FOR J0.6C3 CONTINUATION WORD.
		ACTION EIGHT	8	USE CRYPTOVARIABLE LOGICAL LABEL, MSEC INITIALIZATION FOR VOICE B AND CONTROL ON THE INDICATED NETS AT THE INDICATED TIME. ILLEGAL FOR J0.6C3 CONTINUATION WORD.
		ACTION NINE	9	USE CRYPTOVARIABLE LOGICAL LABEL, MSEC INITIALIZATION FOR VOICE A AND VOICE B ON THE INDICATED NETS AT THE INDICATED TIME. ILLEGAL FOR J0.6C3 CONTINUATION WORD.
		UNDEFINED	10 THROUGH 15	
801	006	CRYPTOVARIABLE LOGICAL LABEL, -----		A LOGICAL LABEL USED TO UNIQUELY IDENTIFY THE CRYPTOVARIABLE TO BE ADDED TO THE INITIALIZATION TABLE FOR THE SPECIFIED NET NUMBERS ON THE PARTICIPATION GROUP SPECIFIED BY THE CRYPTOVARIABLE ACTION CODE.
		NO STATEMENT LOGICAL LABEL	0 1 THROUGH 127	
348	013	NET NUMBER, 1 -----		
		ASSIGNED NET NO STATEMENT	0 THROUGH 126 127	

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

J0.7 MESSAGE SUMMARY

PURPOSE

The J0.7 Time Slot Reallocation message provides the capability for a JU to request a percentage of time slots from a shared pool and disseminate the requests of other JUs.

DATA ELEMENT SUMMARY

<u>J0.7I</u>		<u>J0.7E0 (Continued)</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	SPARE(2)	*
LABEL, J-SERIES	5	DEMAND, E(5)	*
SUBLABEL, J-SERIES	3	RECEIVE COUNT, E(3)	*
MESSAGE LENGTH INDICATOR	3	HOP COUNT, E(3)	*
REALLOCATION POOL NUMBER	3	TIME TAG, E(3)	*
DISSEMINATION MODE INDICATOR, OWN	1	DEMAND, B(5)	*
TABLE POSITION NUMBER, OWN	7	HOP COUNT, B(3)	*
DEMAND, OWN	5	RECEIVE COUNT, B(3)	*
RECEIVE COUNT, OWN	3	SPARE(2)	*
DISSEMINATION MODE INDICATOR, A	1	TRACK NUMBER, DEMAND	*
SPARE	1	ORIGINATOR B(15)	*
HOP COUNT, A	3	SPARE(1)	*
TIME TAG, A	3	TIME TAG, B(3)	*
DEMAND, A	5	DEMAND, C(5)	*
RECEIVE COUNT, A	3	HOP COUNT, C(3)	*
TRACK NUMBER, DEMAND*****		RECEIVE COUNT, C(3)	*
ORIGINATOR A(15)	*	SPARE(2)	*
TABLE POSITION NUMBER, A(7)	15	TRACK NUMBER, DEMAND	*
SPARE(8)*****		ORIGINATOR C(15)	*
SPARE	7	SPARE(1)	*
		TIME TAG, C(3)	*
		SPARE(3)*****	67

<u>J0.7E0</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
DISSEMINATION MODE INDICATOR, WORD	1
TABLE SEGMENT(5)*****	
DEMAND, B(5)	*
RECEIVE COUNT, B(3)	*
HOP COUNT, B(3)	*
TIME TAG, B(3)	*
SPARE(2)	*
DEMAND, C(5)	*
RECEIVE COUNT, C(3)	*
HOP COUNT, C(3)	*
TIME TAG, C(3)	*
SPARE(2)	*
DEMAND, D(5)	*
RECEIVE COUNT, D(3)	*
HOP COUNT, D(3)	*
TIME TAG, D(3)	*

MIL-STD-6016B

J0.7 TRANSMIT/RECEIVE RULES

TITLE: Time Slot Reallocation Message

TRANSMIT RULES

JUs participating in a reallocation pool shall transmit a J0.7I Time Slot Reallocation initial word containing their own request and, if available, a report on the request of another terminal in the community, at a rate of one message per reallocation period. The remainder of the message will consist of J0.7E0 extension words reporting the requests of other terminals in the same reallocation pool.

RECEIVE RULES

The terminal shall update its database with information contained in the fields of the J0.7 message. This information will be used in reallocating time slots.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: TIME SLOT REALLOCATION INITIAL WORD

24: 23 22 21 20 19 18 17: 16: 15 14 13: 12 11 10: 09 08 07: 06 05 04 03 02: 01 00:																											
<---	:	TABLE POSITION NUMBER, OWN							:	MIO:	POOL NUMBER:			:	MESSAGE LENGTH		:	SUBLABEL, J-SERIES		:	LABEL, J-SERIES			:	WORD FORMAT		:
:	:								:	:				:	INDICATOR		:			:				:			:
:	:	7							:	1	:	3		:	3		:	3		:	5			:	2		:

49	48:	47	46	45:	44	43	42	41	40:	39	38	37:	36	35	34:	33:	32:	31	30	29:	28	27	26	25
<---	:			:					:			:			:	:				:				
-----	:	RECEIVE		:		DEMAND, A			:	TIME TAG, A	:	HOP	COUNT, A	:	SP	:	MIA:	RECEIVE	:		DEMAND, OWN			
<---	:	COUNT, A		:					:			:		A	:		:	COUNT, OWN	:					
	:			:					:			:			:		:			:				
	:	3		:		5			:	3		:	3		:	1	:	1	:	3			5	

:	69	68	67	66	65	64	63	:	62	61	60	59	58	57	56	55	54	53	52	51	50		
:								:	TRACK NUMBER, DEMAND ORIGINATOR A														
:	SPARE							:															
:								:	SPARE							:	TABLE POSITION						
:								:								:	NUMBER, A						
:	7							:	15														

WORD DESCRIPTION

WORD NUMBER: J0.7I

WORD TITLE: TIME SLOT REALLOCATION INITIAL WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	00
270	004	LABEL, J-SERIES	2-	6 5	00000
271	005	SUBLABEL, J-SERIES	7-	9 3	111
800	001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NUMBER OF ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
1616	001	REALLOCATION POOL NUMBER (POOL NUMBER)	13-	15 3	
1936	001	DISSEMINATION MODE INDICATOR, OWN (MIO)	16	1	
1946	001	TABLE POSITION NUMBER, OWN	17-	23 7	
1956	001	DEMAND, OWN	24-	28 5	
1966	001	RECEIVE COUNT, OWN	29-	31 3	
1936	002	DISSEMINATION MODE INDICATOR, A (MIA)	32	1	
756	001	SPARE (SP)	33	1	
1976	001	HOP COUNT, A	34-	36 3	
1986	001	TIME TAG, A	37-	39 3	
1956	002	DEMAND, A	40-	44 5	
1966	002	RECEIVE COUNT, A	45-	47 3	
769	001	TRACK NUMBER, DEMAND ORIGINATOR A	48-	62 15	
1946	002	TABLE POSITION NUMBER, A	48-	54 7	
756	008	SPARE	55-	62 8	
756	007	SPARE	63-	69 7	

FIELD CODING FOR J0.7I

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1616	001	REALLOCATION POOL NUMBER -----		IDENTIFIES THE REALLOCATION POOL REFERRED TO BY THE MESSAGE.
		POOL ONE	0	
		POOL TWO	1	
		POOL THREE	2	
		POOL FOUR	3	
		POOL FIVE	4	
		POOL SIX	5	
		POOL SEVEN	6	
		POOL EIGHT	7	
1936	001	DISSEMINATION MODE INDICATOR, OWN -----		INDICATES WHETHER THE ORIGINATING JU IS USING TABLE MODE OR TRACK NUMBER MODE TO REPORT ITS OWN DEMAND INFORMATION. IN TABLE MODE JUS ARE IDENTIFIED BY A PREDEFINED TABLE POSITION NUMBER. IN TRACK NUMBER MODE THEY ARE REFERENCED BY SOURCE TRACK NUMBER.
		TABLE MODE	0	THE SPECIFIED JU IS USING TABLE MODE.
		STN MODE	1	THE SPECIFIED JU IS USING TRACK NUMBER MODE.
1946	001	TABLE POSITION NUMBER, OWN -----		IF THE JU IS USING TABLE MODE THIS FIELD GIVES ITS TABLE POSITION NUMBER.
		NUMERIC	0 THROUGH 127	TABLE ENTRY NUMBER.
1956	001	DEMAND, OWN -----		INDICATES THE NUMBER OF TIME SLOTS REQUIRED BY THE ORIGINATING JU IN THE NEXT REALLOCATION PERIOD AS A PERCENTAGE OF THE REALLOCATION POOL. IF THE REALLOCATION POOL SIZE IS P AND THE PERCENTAGE OF THE REALLOCATION POOL REQUIRED IS F THEN THE NUMBER OF TIME SLOTS REQUIRED IS THE SMALLEST INTEGER NOT LESS THAN THE PRODUCT OF F AND P DIVIDED BY 100.
		0.0% OF POOL REQUIRED	0	
		0.2% OF POOL REQUIRED	1	
		0.4% OF POOL REQUIRED	2	
		0.6% OF POOL REQUIRED	3	
		0.8% OF POOL REQUIRED	4	

FIELD CODING FOR J0.7I

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1956	001	DEMAND, OWN	(CONTINUED)	

		1.0% OF POOL REQUIRED	5	
		1.2% OF POOL REQUIRED	6	
		1.4% OF POOL REQUIRED	7	
		1.6% OF POOL REQUIRED	8	
		1.8% OF POOL REQUIRED	9	
		2.0% OF POOL REQUIRED	10	
		2.2% OF POOL REQUIRED	11	
		2.4% OF POOL REQUIRED	12	
		2.6% OF POOL REQUIRED	13	
		2.8% OF POOL REQUIRED	14	
		3.0% OF POOL REQUIRED	15	
		4.0% OF POOL REQUIRED	16	
		5.0% OF POOL REQUIRED	17	
		6.0% OF POOL REQUIRED	18	
		7.0% OF POOL REQUIRED	19	
		8.0% OF POOL REQUIRED	20	
		10.0% OF POOL REQUIRED	21	
		12.0% OF POOL REQUIRED	22	
		15.0% OF POOL REQUIRED	23	
		18.0% OF POOL REQUIRED	24	
		22.0% OF POOL REQUIRED	25	
		27.0% OF POOL REQUIRED	26	
		33.0% OF POOL REQUIRED	27	
		40.0% OF POOL REQUIRED	28	
		50.0% OF POOL REQUIRED	29	
		60.0% OF POOL REQUIRED	30	
		NO STATEMENT	31	IGNORE THIS DEMAND.
1966	001	RECEIVE COUNT, OWN		THE NUMBER OF TSR PARTICIPANTS THE
		-----		ORIGINATING JU HAS RECEIVED DEMAND
				DATA FROM IN THIS REALLOCATION
				POOL.
		0 DEMANDS RECEIVED	0	
		1 DEMAND RECEIVED	1	
		2 DEMANDS RECEIVED	2	
		3 DEMANDS RECEIVED	3	
		4-7 DEMANDS RECEIVED	4	
		8-15 DEMANDS RECEIVED	5	
		16-31 DEMANDS RECEIVED	6	
		32 OR MORE DEMANDS	7	
		RECEIVED		

FIELD CODING FOR J0.7I				(SHEET 3)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1936	002	DISSEMINATION MODE INDICATOR, A -----		INDICATES WHETHER THE REPORTED JU IS USING TABLE MODE OR TRACK NUMBER MODE TO REPORT ITS OWN DEMAND INFORMATION. IN TABLE MODE JUS ARE IDENTIFIED BY A PREDEFINED TABLE POSITION NUMBER. IN TRACK NUMBER MODE THEY ARE REFERENCED BY SOURCE TRACK NUMBER.
		TABLE MODE	0	THE SPECIFIED JU IS USING TABLE MODE.
		STN MODE	1	THE SPECIFIED JU IS USING TRACK NUMBER MODE.
1976	001	HOP COUNT, A -----		A COUNT OF THE NUMBER OF TIMES THE DEMAND FROM THE ORIGINATOR (A) HAS BEEN REPEATED BY DIFFERENT JUS.
		NO HOPS	0	
		1 HOP	1	
		2 HOPS	2	
		3 HOPS	3	
		4 HOPS	4	
		5 HOPS	5	
		6 HOPS	6	
		7 OR MORE HOPS	7	
1986	001	TIME TAG, A -----		THE NUMBER OF REALLOCATION PERIODS THAT HAVE BEGUN SINCE THE DEMAND INFORMATION WAS FIRST TRANSMITTED IN A J0.7I BY THE ORIGINATOR.
		NUMERIC	0 THROUGH 7	THE NUMBER OF REALLOCATION PERIODS.
1956	002	DEMAND, A -----		INDICATES THE NUMBER OF TIME SLOTS REQUIRED BY THE REPORTED JU IN THE NEXT REALLOCATION PERIOD AS A PERCENTAGE OF THE REALLOCATION POOL. IF THE REALLOCATION POOL SIZE IS P AND THE PERCENTAGE OF THE REALLOCATION POOL REQUIRED IS F THEN THE NUMBER OF TIME SLOTS REQUIRED IS THE SMALLEST INTEGER NOT LESS THAN THE PRODUCT OF F AND P DIVIDED BY 100.
		0.0% OF POOL REQUIRED	0	
		0.2% OF POOL REQUIRED	1	
		0.4% OF POOL REQUIRED	2	

FIELD CODING FOR J0.7I

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1956	002	DEMAND, A -----	(CONTINUED)	
		0.6% OF POOL REQUIRED	3	
		0.8% OF POOL REQUIRED	4	
		1.0% OF POOL REQUIRED	5	
		1.2% OF POOL REQUIRED	6	
		1.4% OF POOL REQUIRED	7	
		1.6% OF POOL REQUIRED	8	
		1.8% OF POOL REQUIRED	9	
		2.0% OF POOL REQUIRED	10	
		2.2% OF POOL REQUIRED	11	
		2.4% OF POOL REQUIRED	12	
		2.6% OF POOL REQUIRED	13	
		2.8% OF POOL REQUIRED	14	
		3.0% OF POOL REQUIRED	15	
		4.0% OF POOL REQUIRED	16	
		5.0% OF POOL REQUIRED	17	
		6.0% OF POOL REQUIRED	18	
		7.0% OF POOL REQUIRED	19	
		8.0% OF POOL REQUIRED	20	
		10.0% OF POOL REQUIRED	21	
		12.0% OF POOL REQUIRED	22	
		15.0% OF POOL REQUIRED	23	
		18.0% OF POOL REQUIRED	24	
		22.0% OF POOL REQUIRED	25	
		27.0% OF POOL REQUIRED	26	
		33.0% OF POOL REQUIRED	27	
		40.0% OF POOL REQUIRED	28	
		50.0% OF POOL REQUIRED	29	
		60.0% OF POOL REQUIRED	30	
		NO STATEMENT	31	IGNORE THIS DEMAND.
1966	002	RECEIVE COUNT, A -----		THE NUMBER OF TSR PARTICIPANTS THE REPORTED JU HAS RECEIVED DEMAND DATA FROM IN THIS REALLOCATION POOL.
		0 DEMANDS RECEIVED	0	
		1 DEMAND RECEIVED	1	
		2 DEMANDS RECEIVED	2	
		3 DEMANDS RECEIVED	3	
		4-7 DEMANDS RECEIVED	4	
		8-15 DEMANDS RECEIVED	5	
		16-31 DEMANDS RECEIVED	6	
		32 OR MORE DEMANDS RECEIVED	7	

			FIELD CODING FOR J0.7I	(SHEET 5)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	001	TRACK NUMBER, DEMAND ORIGINATOR A -----		THE TRACK NUMBER OF THE UNIT ORIGINATING THE DEMAND (A).
		NO STATEMENT NUMERIC	0 00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		ILLEGAL NUMERIC	00077 (OCTAL) 00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC	00177 (OCTAL)	COLLECTIVE ADDRESS.
		NUMERIC	00200 THROUGH 07776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL NUMERIC	07777 (OCTAL) 10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
1946	002	TABLE POSITION NUMBER, A -----		IF THE JU IS USING TABLE MODE THIS FIELD GIVES ITS TABLE POSITION NUMBER.
		NUMERIC	0 THROUGH 127	TABLE ENTRY NUMBER.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: TIME SLOT REALLOCATION EXTENSION WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00
: <---		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
SP		: TIME TAG, B		: HOP COUNT, B		: RECEIVE COUNT, B		: DEMAND, B		: TABLE SEGMENT		: MIW		: WORD		: FORMAT								
TRACK NUMBER, DEMAND ORIGINATOR B		: SP		: RECEIVE HOP COUNT, B		: DEMAND, B		: MIW		: WORD		: FORMAT												

WORD DESCRIPTION

WORD NUMBER: J0.7E0

WORD TITLE: TIME SLOT REALLOCATION EXTENSION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550 001		WORD FORMAT	0-	1 2	10
1936 003		DISSEMINATION MODE INDICATOR, WORD (MIW)	2	1	
1946 003		TABLE SEGMENT	3-	7 5	
1956 003		DEMAND, B	8-	12 5	
1966 003		RECEIVE COUNT, B	13-	15 3	
1976 002		HOP COUNT, B	16-	18 3	
1986 002		TIME TAG, B	19-	21 3	
756 002		SPARE (SP)	22-	23 2	
1956 004		DEMAND, C	24-	28 5	SAME CODING AS FOR BITS 8-12.
1966 004		RECEIVE COUNT, C	29-	31 3	SAME CODING AS FOR BITS 13-15.
1976 003		HOP COUNT, C	32-	34 3	SAME CODING AS FOR BITS 16-18.
1986 003		TIME TAG, C	35-	37 3	SAME CODING AS FOR BITS 19-21.
756 002		SPARE (SP)	38-	39 2	
1956 005		DEMAND, D	40-	44 5	SAME CODING AS FOR BITS 8-12.
1966 005		RECEIVE COUNT, D	45-	47 3	SAME CODING AS FOR BITS 13-15.
1976 004		HOP COUNT, D	48-	50 3	SAME CODING AS FOR BITS 16-18.
1986 004		TIME TAG, D	51-	53 3	SAME CODING AS FOR BITS 19-21.
756 002		SPARE (SP)	54-	55 2	
1956 006		DEMAND, E	56-	60 5	SAME CODING AS FOR BITS 8-12.
1966 006		RECEIVE COUNT, E	61-	63 3	SAME CODING AS FOR BITS 13-15.
1976 005		HOP COUNT, E	64-	66 3	SAME CODING AS FOR BITS 16-18.
1986 005		TIME TAG, E	67-	69 3	SAME CODING AS FOR BITS 19-21.
1956 003		DEMAND, B	3-	7 5	SAME CODING AS FOR BITS 8-12.
1976 002		HOP COUNT, B	8-	10 3	SAME CODING AS FOR BITS 16-18.
1966 003		RECEIVE COUNT, B	11-	13 3	SAME CODING AS FOR BITS 13-15.
756 002		SPARE (SP)	14-	15 2	
769 014		TRACK NUMBER, DEMAND ORIGINATOR B	16-	30 15	
756 001		SPARE (SP)	31	1	
1986 002		TIME TAG, B	32-	34 3	SAME CODING AS FOR BITS 19-21.
1956 004		DEMAND, C	35-	39 5	SAME CODING AS FOR BITS 8-12.
1976 003		HOP COUNT, C	40-	42 3	SAME CODING AS FOR BITS 16-18.
1966 004		RECEIVE COUNT, C	43-	45 3	SAME CODING AS FOR BITS 13-15.
756 002		SPARE (SP)	46-	47 2	
769 027		TRACK NUMBER, DEMAND ORIGINATOR C	48-	62 15	SAME CODING AS FOR BITS 16-30.
756 001		SPARE (SP)	63	1	

WORD DESCRIPTION

WORD NUMBER: J0.7E0

WORD TITLE: TIME SLOT REALLOCATION EXTENSION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT		#	RESOLUTION, CODING, ETC
			POSITION	BITS		
1986 003		TIME TAG, C	64-	66	3	SAME CODING AS FOR BITS 19-21.
756 003		SPARE	67-	69	3	

FIELD CODING FOR J0.7E0

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1936	003	DISSEMINATION MODE INDICATOR, WORD -----		INDICATES WHETHER JUS REPORTED IN THE J0.7E0 WORD ARE ALL USING TABLE MODE OR TRACK NUMBER MODE TO REPORT THEIR OWN DEMAND INFORMATION. IN TABLE MODE JUS ARE IDENTIFIED BY A PREDEFINED TABLE POSITION NUMBER. IN TRACK NUMBER MODE THEY ARE REFERENCED BY SOURCE TRACK NUMBER. THE REPORTED JUS ARE USING TABLE MODE. THE REPORTED JUS ARE USING TRACK NUMBER MODE.
1946	003	TABLE SEGMENT -----		IN TABLE MODE INDICATES THE TABLE SEGMENT CONTAINING THE REPORTED DEMANDS. THE TSR TABLE CONTAINS 32 SEGMENTS OF 4 ENTRIES EACH. THIS FIELD IDENTIFIES WHICH SEGMENT OF THE TABLE IS REPORTED IN THIS WORD. E.G. FOR TABLE SEGMENT = 2 DEMAND, B CORRESPONDS TO TABLE POSITION NUMBER 8, DEMAND, C CORRESPONDS TO TABLE POSITION NUMBER 9 AND SO ON.
		TABLE POSITION NUMBERS 0-3	0	
		TABLE POSITION NUMBERS 4-7	1	
		TABLE POSITION NUMBERS 8-11	2	
		TABLE POSITION NUMBERS 12-15	3	
		TABLE POSITION NUMBERS 16-19	4	
		TABLE POSITION NUMBERS 20-23	5	
		TABLE POSITION NUMBERS 24-27	6	
		TABLE POSITION NUMBERS 28-31	7	
		TABLE POSITION NUMBERS 32-35	8	
		TABLE POSITION NUMBERS 36-39	9	

FIELD CODING FOR J0.7E0

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1946	003	TABLE SEGMENT	(CONTINUED)	

		TABLE POSITION NUMBERS	10	
		40-43		
		TABLE POSITION NUMBERS	11	
		44-47		
		TABLE POSITION NUMBERS	12	
		48-51		
		TABLE POSITION NUMBERS	13	
		52-55		
		TABLE POSITION NUMBERS	14	
		56-59		
		TABLE POSITION NUMBERS	15	
		60-63		
		TABLE POSITION NUMBERS	16	
		64-67		
		TABLE POSITION NUMBERS	17	
		68-71		
		TABLE POSITION NUMBERS	18	
		72-75		
		TABLE POSITION NUMBERS	19	
		76-79		
		TABLE POSITION NUMBERS	20	
		80-83		
		TABLE POSITION NUMBERS	21	
		84-87		
		TABLE POSITION NUMBERS	22	
		88-91		
		TABLE POSITION NUMBERS	23	
		92-95		
		TABLE POSITION NUMBERS	24	
		96-99		
		TABLE POSITION NUMBERS	25	
		100-103		
		TABLE POSITION NUMBERS	26	
		104-107		
		TABLE POSITION NUMBERS	27	
		108-111		
		TABLE POSITION NUMBERS	28	
		112-115		
		TABLE POSITION NUMBERS	29	
		116-119		
		TABLE POSITION NUMBERS	30	
		120-123		

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1946	003	TABLE SEGMENT ----- TABLE POSITION NUMBERS 124-127	(CONTINUED) 31	
1956	003	DEMAND, B -----		INDICATES THE NUMBER OF TIME SLOTS REQUIRED BY THE REPORTED JU IN THE NEXT REALLOCATION PERIOD AS A PERCENTAGE OF THE REALLOCATION POOL. IF THE REALLOCATION POOL SIZE IS P AND THE PERCENTAGE OF THE REALLOCATION POOL REQUIRED IS F THEN THE NUMBER OF TIME SLOTS REQUIRED IS THE SMALLEST INTEGER NOT LESS THAN THE PRODUCT OF F AND P DIVIDED BY 100.
		0.0% OF POOL REQUIRED	0	
		0.2% OF POOL REQUIRED	1	
		0.4% OF POOL REQUIRED	2	
		0.6% OF POOL REQUIRED	3	
		0.8% OF POOL REQUIRED	4	
		1.0% OF POOL REQUIRED	5	
		1.2% OF POOL REQUIRED	6	
		1.4% OF POOL REQUIRED	7	
		1.6% OF POOL REQUIRED	8	
		1.8% OF POOL REQUIRED	9	
		2.0% OF POOL REQUIRED	10	
		2.2% OF POOL REQUIRED	11	
		2.4% OF POOL REQUIRED	12	
		2.6% OF POOL REQUIRED	13	
		2.8% OF POOL REQUIRED	14	
		3.0% OF POOL REQUIRED	15	
		4.0% OF POOL REQUIRED	16	
		5.0% OF POOL REQUIRED	17	
		6.0% OF POOL REQUIRED	18	
		7.0% OF POOL REQUIRED	19	
		8.0% OF POOL REQUIRED	20	
		10.0% OF POOL REQUIRED	21	
		12.0% OF POOL REQUIRED	22	
		15.0% OF POOL REQUIRED	23	
		18.0% OF POOL REQUIRED	24	
		22.0% OF POOL REQUIRED	25	
		27.0% OF POOL REQUIRED	26	
		33.0% OF POOL REQUIRED	27	
		40.0% OF POOL REQUIRED	28	

FIELD CODING FOR J0.7E0

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1956	003	DEMAND, B -----	(CONTINUED)	
		50.0% OF POOL REQUIRED	29	
		60.0% OF POOL REQUIRED	30	
		NO STATEMENT	31	IGNORE THIS DEMAND.
1966	003	RECEIVE COUNT, B -----		THE NUMBER OF TSR PARTICIPANTS THE REPORTED JU HAS RECEIVED DEMAND DATA FROM IN THIS REALLOCATION POOL.
		0 DEMANDS RECEIVED	0	
		1 DEMAND RECEIVED	1	
		2 DEMANDS RECEIVED	2	
		3 DEMANDS RECEIVED	3	
		4-7 DEMANDS RECEIVED	4	
		8-15 DEMANDS RECEIVED	5	
		16-31 DEMANDS RECEIVED	6	
		32 OR MORE DEMANDS RECEIVED	7	
1976	002	HOP COUNT, B -----		A COUNT OF THE NUMBER OF TIMES THE DEMAND FROM THE ORIGINATOR (B) HAS BEEN REPEATED BY DIFFERENT JUS.
		NO HOPS	0	
		1 HOP	1	
		2 HOPS	2	
		3 HOPS	3	
		4 HOPS	4	
		5 HOPS	5	
		6 HOPS	6	
		7 OR MORE HOPS	7	
1986	002	TIME TAG, B -----		THE NUMBER OF REALLOCATION PERIODS THAT HAVE BEGUN SINCE THE DEMAND INFORMATION WAS FIRST TRANSMITTED IN A J0.7I BY THE ORIGINATOR.
		NUMERIC	0 THROUGH 7	THE NUMBER OF REALLOCATION PERIODS.
769	014	TRACK NUMBER, DEMAND ORIGINATOR B -----		THE TRACK NUMBER OF THE UNIT ORIGINATING THE DEMAND (B).
		NO STATEMENT	0	
		NUMERIC	00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		ILLEGAL	00077 (OCTAL)	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	014	TRACK NUMBER, DEMAND ORIGINATOR B	(CONTINUED)	

		NUMERIC	00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC	00177 (OCTAL)	COLLECTIVE ADDRESS.
		NUMERIC	00200 THROUGH 07776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL	07777 (OCTAL)	
		NUMERIC	10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

TABLE J1-1. J1 System Information Exchange and Network Management Word Applicability Table

INITIAL WORD	SUBLABEL						
	J1.0I CONNECTIVITY INTERROGATION	J1.1I CONNECTIVITY STATUS	J1.2I ROUTE ESTABLISHMENT	J1.3I ACKNOWLEDGEMENT	J1.4I COMMUNICANT STATUS	J1.5I NET CONTROL INITIALIZATION	J1.6I NEEDLINE PG ASSIGNMENT
EXTENSION WORD - 0	J1.0E0	J1.1E0	J1.2E0	J1.3E0	J1.4E0	J1.5E0	J1.6E0
1			J1.2E1				
CONTINUATION WORD - 0							
1		J1.1C1 CONNECTIVITY STATUS				J1.5C1 NET CONTROL INITIALIZATION	
2		J1.1C2 CONNECTIVITY STATUS					
3							
4							
5							
6							
7							
8							
9							
10							
..							
..							
31							

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

J1.0 MESSAGE SUMMARY

PURPOSE

The J1.0 Connectivity Interrogation message is used to solicit direct or indirect connectivity of the addressed JUs to support route establishment.

DATA ELEMENT SUMMARY

<u>J1.0I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
CONNECTIVITY INTERROGATION	2
INSTRUCTION	
ROUTE NUMBER	4
RECURRENCE RATE, RESPONSE	4
RECURRENCE RATE, UPDATE	2
TRACK NUMBER, JU 1	15
TRACK NUMBER, JU 2	15
TRACK NUMBER, JU 3	15

<u>J1.0E0</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
SPARE	8
TRACK NUMBER, JU 4	15
TRACK NUMBER, JU 5	15
TRACK NUMBER, JU 6	15
TRACK NUMBER, JU 7	15

MIL-STD-6016B

J1.0 TRANSMIT/RECEIVE RULES

TITLE: Connectivity Interrogation Message

TRANSMIT RULES

1. The J1.0 Connectivity Interrogation message shall be transmitted by any JU involved in ground-to-ground communications when building and maintaining its address database.
2. The J1.0E0 Connectivity Interrogation extension word is repeatable.

RECEIVE RULES

Upon receipt of the J1.0 message, a JU shall respond with the required sequence of J1.1 Connectivity Status messages.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: CONNECTIVITY INTERROGATION INITIAL WORD

[illegible]

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25	
TRACK NUMBER, JU 2										:	TRACK NUMBER, JU 1														:
15										:	15														:

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55:	54	53	52	51	50	
:																:					
:	TRACK NUMBER, JU 3															:	---				
:																:					
:	15															:					

WORD DESCRIPTION

WORD NUMBER: J1.0I
WORD TITLE: CONNECTIVITY INTERROGATION INITIAL WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	00
270	004	LABEL, J-SERIES	2-	6 5	00001
271	005	SUBLABEL, J-SERIES	7-	9 3	000
800	001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
1726	001	CONNECTIVITY INTERROGATION INSTRUCTION (CII)	13-	14 2	
1727	001	ROUTE NUMBER	15-	18 4	
444	020	RECURRENCE RATE, RESPONSE	19-	22 4	
444	021	RECURRENCE RATE, UPDATE (RRN UPD)	23-	24 2	
769	032	TRACK NUMBER, JU 1	25-	39 15	
769	033	TRACK NUMBER, JU 2	40-	54 15	SAME CODING AS FOR BITS 25-39.
769	034	TRACK NUMBER, JU 3	55-	69 15	SAME CODING AS FOR BITS 25-39.

FIELD CODING FOR J1.0I				(SHEET 1)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1726	001	CONNECTIVITY INTERROGATION INSTRUCTION -----		INDICATES WHAT TYPE OF CONNECTIVITY IS BEING REQUESTED FROM THE ADDRESSEE(S) TO SUPPORT ROUTE ESTABLISHMENT.
		BROADCAST	0	BROADCAST REQUEST FROM ANY UNIT WITHIN LINE-OF-SIGHT TO SOURCE. DISREGARD ROUTE NUMBER AND UPDATE RECURRENCE RATE.
		DIRECT CONNECTIVITY REQUEST	1	ADDRESSED TO JU(S) REFERENCED IN MESSAGE FOR THEIR DIRECT CONNECTIVITY.
		INDIRECT CONNECTIVITY REQUEST, LEVEL 1	2	ADDRESSED TO JU(S) ASSOCIATED WITH SOURCE JU ROUTE NUMBER TO ELICIT THEIR CONNECTIVITY WITH RESPECT TO THE JU(S) REFERENCED IN MESSAGE.
		INDIRECT CONNECTIVITY REQUEST, LEVEL 2	3	ADDRESSED TO JU(S) ASSOCIATED WITH SOURCE JU ROUTE NUMBER TO ELICIT THE CONNECTIVITY OF THE JU(S) REFERENCED IN MESSAGE.
1727	001	ROUTE NUMBER -----		INDICATES A NUMBER WITHIN THE ROUTE DIRECTORY THAT IS ASSOCIATED WITH THE SOURCE OF THE MESSAGE. THE ROUTE DIRECTORY INCLUDES RELAY/ DESTINATION TNS FOR EACH SOURCE TN.
		ROUTE NUMBER	0 THROUGH 15	ROUTE DIRECTORY INDEX ASSOCIATED WITH SOURCE OF MESSAGE. THE ROUTE DIRECTORY INCLUDES RELAY/ DESTINATION JU TNS FOR EACH SOURCE JU ROUTE NUMBER.
444	020	RECURRENCE RATE, RESPONSE -----		EXPRESSES A NUMBER 'N' WHICH, AS PART OF A TIME SLOT ASSIGNMENT, ESTABLISHES THE NUMBER OF ASSIGNED TIME SLOTS SPACED UNIFORMLY OVER EACH EPOCH.
		1 TIME SLOT PER EPOCH	0	
		2 THROUGH 32,768 TIME SLOTS PER EPOCH	1 THROUGH 15	EXPRESSED AS A POWER OF 2, I.E. BIT CODE 1=2 TO THE FIRST POWER, BIT CODE 2=2 TO THE SECOND POWER, ETC.
444	021	RECURRENCE RATE, UPDATE -----		A FACTOR WHICH REDUCES THE GIVEN RE- CURRENCE RATE TO PROVIDE A SLOWER RECURRENCE OF THE CONNECTIVITY

		FIELD CODING FOR J1.0I		(SHEET 2)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
444	021	RECURRENCE RATE, UPDATE -----	(CONTINUED)	
		RECURRENCE RATE FACTOR	0 THROUGH 3	STATUS MESSAGE. A FACTOR OF ZERO MEANS NO UPDATE REQUIRED. A FACTOR WHICH REDUCES THE GIVEN RECURRENCE RATE TO PROVIDE A SLOWER RECURRENCE OF THE CONNECTIVITY STATUS MESSAGE. A FACTOR OF ZERO MEANS NO UPDATE REQUIRED.
769	032	TRACK NUMBER, JU 1 -----		THE TN OF ONE OF A NUMBER OF JUS TO WHICH A MESSAGE CAN BE ADDRESSED.
		NO STATEMENT NUMERIC	0 00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		ILLEGAL NUMERIC	00077 (OCTAL) 00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU). RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC	00176 (OCTAL)	COLLECTIVE ADDRESS.
		NUMERIC	00177 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	00200 THROUGH 07776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL NUMERIC	07777 (OCTAL) 10000 THROUGH 77776 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		NUMERIC	77777 (OCTAL)	

.....

WORD TITLE: CONNECTIVITY INTERROGATION EXTENSION WORD

:	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10:	09	08	07	06	05	04	03	02:	01	00:					
:																:											:	WORD	:	
:	TRACK NUMBER, JU 4															:	SPARE										:	FORMAT	:	
:																:											:		:	
:	15															:	8										:	2	:	
:	49	48	47	46	45	44	43	42	41	40:	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25:					
:	TRACK NUMBER, JU 6										:	TRACK NUMBER, JU 5																	:	
:											:																		:	
:	15										:	15																	:	
:						:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55:	54	53	52	51	50				
:																					:									:
:	TRACK NUMBER, JU 7																				:	---								:
:																					:									:
:	15															:													:	

WORD DESCRIPTION

WORD NUMBER: J1.0E0

WORD TITLE: CONNECTIVITY INTERROGATION EXTENSION WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	10
756 008	SPARE	2-	9 8	
769 035	TRACK NUMBER, JU 4	10-	24 15	
769 036	TRACK NUMBER, JU 5	25-	39 15	SAME CODING AS FOR BITS 10-24.
769 037	TRACK NUMBER, JU 6	40-	54 15	SAME CODING AS FOR BITS 10-24.
769 038	TRACK NUMBER, JU 7	55-	69 15	SAME CODING AS FOR BITS 10-24.

FIELD CODING FOR J1.0E0

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	035	TRACK NUMBER, JU 4 -----		THE TN OF ONE OF A NUMBER OF JUS TO WHICH A MESSAGE CAN BE ADDRESSED.
		NO STATEMENT NUMERIC	0 00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		ILLEGAL NUMERIC	00077 (OCTAL) 00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC	00177 (OCTAL)	COLLECTIVE ADDRESS.
		NUMERIC	00200 THROUGH 07776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL NUMERIC	07777 (OCTAL) 10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.

MIL-STD-6016B

J1.1 MESSAGE SUMMARY

PURPOSE

The J1.1 Connectivity Status message is used to disseminate direct or multilevel connectivity of the source JUs.

DATA ELEMENT SUMMARY

<u>J1.1I</u>		<u>J1.1C1 (Continued)</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	TRACK NUMBER, JU 10	15
LABEL, J-SERIES	5	COMMUNITY DESIGNATOR	4
SUBLABEL, J-SERIES	3	RELAY LEVEL	4
MESSAGE LENGTH INDICATOR	3	SPARE	4
CONNECTIVITY STATUS	2		
INSTRUCTION			
CONNECTIVITY STATUS LEVEL	3		
SPARE	1		
CONNECTIVITY QUALITY, 1	2		
CONNECTIVITY QUALITY, 2	2		
CONNECTIVITY QUALITY, 3	2		
TRACK NUMBER, JU 1	15		
TRACK NUMBER, JU 2	15		
TRACK NUMBER, JU 3	15		
<u>J1.1E0</u>		<u>J1.1C2</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	WORD FORMAT	2
CONNECTIVITY QUALITY, 4(2)*****	*	CONTINUATION WORD LABEL	5
CONNECTIVITY QUALITY, 5(2)	*	CONNECTIVITY QUALITY, INTRA-	2
CONNECTIVITY QUALITY, 6(2)	*	COMMUNITY COMMUNICANT 1	
CONNECTIVITY QUALITY, 7(2)	*	CONNECTIVITY QUALITY, INTRA-	2
TRACK NUMBER, JU 4(15)	*	COMMUNITY COMMUNICANT 2	
TRACK NUMBER, JU 5(15)	*	CONNECTIVITY QUALITY, INTRA-	2
TRACK NUMBER, JU 6(15)	*	COMMUNITY COMMUNICANT 3	
TRACK NUMBER, JU 7(15)	*	CONNECTIVITY QUALITY, INTRA-	2
CONNECTIVITY QUALITY, 8(2)	*	COMMUNITY COMMUNICANT 4	
CONNECTIVITY QUALITY, 9(2)	*	CONNECTIVITY QUALITY, INTRA-	2
CONNECTIVITY QUALITY, 10(2)	*	COMMUNITY COMMUNICANT 5	
CONNECTIVITY QUALITY, 11(2)	*	CONNECTIVITY QUALITY, INTRA-	2
TRACK NUMBER, JU 8(15)	*	COMMUNITY COMMUNICANT 6	
TRACK NUMBER, JU 9(15)	*	CONNECTIVITY QUALITY, INTRA-	2
TRACK NUMBER, JU 10(15)	68	COMMUNITY COMMUNICANT 7	
TRACK NUMBER, JU 11(15)*****		CONNECTIVITY QUALITY, INTRA-	2
		COMMUNITY COMMUNICANT 8	
		CONNECTIVITY QUALITY, INTRA-	2
		COMMUNITY COMMUNICANT 9	
		CONNECTIVITY QUALITY, INTRA-	2
		COMMUNITY COMMUNICANT 10	
		CONNECTIVITY QUALITY, INTRA-	2
		COMMUNITY COMMUNICANT 11	
		CONNECTIVITY QUALITY, INTRA-	2
		COMMUNITY COMMUNICANT 12	
		CONNECTIVITY QUALITY, INTRA-	2
		COMMUNITY COMMUNICANT 13	
		CONNECTIVITY QUALITY, INTRA-	2
		COMMUNITY COMMUNICANT 14	
		CONNECTIVITY QUALITY, INTRA-	2
		COMMUNITY COMMUNICANT 15	
		CONNECTIVITY QUALITY, INTRA-	2
		COMMUNITY COMMUNICANT 16	
		CONNECTIVITY QUALITY, INTRA-	2
		COMMUNITY COMMUNICANT 17	
<u>J1.1C1</u>			
DATA ELEMENT	# BITS		
WORD FORMAT	2		
CONTINUATION WORD LABEL	5		
CONNECTIVITY QUALITY, 8	2		
CONNECTIVITY QUALITY, 9	2		
CONNECTIVITY QUALITY, 10	2		
TRACK NUMBER, JU 8	15		
TRACK NUMBER, JU 9	15		

J1.1 MESSAGE SUMMARY (Continued)

DATA ELEMENT SUMMARY (Continued)

J1.1C2 (Continued)	
DATA ELEMENT	# BITS
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 18	2
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 19	2
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 20	2
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 21	2
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 22	2
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 23	2
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 24	2
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 25	2
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 26	2
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 27	2
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 28	2
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 29	2
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 30	2
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 31	2
SPARE	1

MIL-STD-6016B

J1.1 TRANSMIT/RECEIVE RULES

TITLE: Connectivity Status Message

TRANSMIT RULES

1. The J1.1 Connectivity Status message shall be transmitted by designated JUs periodically to disseminate direct or multilevel connectivity. Other JUs participating in the Link 16 ground network shall transmit the J1.1 message in response to a J1.0 Connectivity Interrogation message.
2. The J1.1C1 Connectivity Status continuation word 1 will be transmitted with the J1.1I Connectivity Status initial word and J1.1E0 Connectivity Status extension word once by JUs attempting net control entry.
3. When attempting net control entry, the JU 1 TN field and Connectivity Quality, 1 field must correspond to the JU receiving the J1.1 message in its Net Control Needline PG receive time slot block. The remaining connectivity qualities must be reported in order of the highest connectivity quality.
4. The J1.1C2 Connectivity Status continuation word 2 shall be transmitted when any of the Connectivity Qualities and JU TNs in the J1.1I and J1.1E0 words are associated with communications from the JU(s) identified in the Connectivity Status Level field. The J1.1C2 word shall not be transmitted when the J1.1C1 word is required.

RECEIVE RULES

1. Upon receipt of the J1.1 message, a JU shall update its address database.
2. When a JU receives a J1.1 message with the J1.1C1 word in its Net Control Needline PG receive time slot block from a new entrant, it will relay the message to its NCS on its Net Status Needline PG.

.....

WORD TITLE: CONNECTIVITY STATUS INITIAL WORD

:	24	:	23:	22	:	21:	20	:	19:	18:	17	:	16	:	15:	14	:	13:	12	:	11	:	10:	09	:	08	:	07:	06	:	05	:	04	:	03	:	02:	01	:	00:		
:	CQ,	:	3	:	CQ,	:	2	:	CQ,	:	1	:	SP	:	CON	:	STS	:	CSI	:	MESSAGE	:	SUBLABEL,	:		:		:		:		:		:		:		:	WORD	:		:
:		:		:		:		:		:		:		:		:		:		:	LENGTH	:	J-SERIES	:		:		:		:		:		:		:		:	FORMAT	:		:
:		:		:		:		:		:		:		:		:		:		:	INDICATOR	:		:		:		:		:		:		:		:		:		:		:
:	2	:		:	2	:		:	2	:		:	1	:		:	3	:		:	2	:		:	3	:		:	3	:		:	5	:		:	2	:		:		

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25	
TRACK NUMBER, JU 2										:	TRACK NUMBER, JU 1														:
15										:	15														:

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55:	54	53	52	51	50	
:																:					
:	TRACK NUMBER, JU 3															:	----				
:																:					
:	15															:					

WORD DESCRIPTION

WORD NUMBER: J1.1I

WORD TITLE: CONNECTIVITY STATUS INITIAL WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	00
270	004	LABEL, J-SERIES	2-	6 5	00001
271	005	SUBLABEL, J-SERIES	7-	9 3	001
800	001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
1728	001	CONNECTIVITY STATUS INSTRUCTION (CSI)	13-	14 2	
1729	001	CONNECTIVITY STATUS LEVEL (CON STS)	15-	17 3	
756	001	SPARE (SP)	18	1	
1725	001	CONNECTIVITY QUALITY, 1 (CQ, 1)	19-	20 2	
1725	002	CONNECTIVITY QUALITY, 2 (CQ, 2)	21-	22 2	SAME CODING AS FOR BITS 19 AND 20.
1725	003	CONNECTIVITY QUALITY, 3 (CQ, 3)	23-	24 2	SAME CODING AS FOR BITS 19 AND 20.
769	032	TRACK NUMBER, JU 1	25-	39 15	
769	033	TRACK NUMBER, JU 2	40-	54 15	SAME CODING AS FOR BITS 25-39.
769	034	TRACK NUMBER, JU 3	55-	69 15	SAME CODING AS FOR BITS 25-39.

FIELD CODING FOR J1.1I

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1728	001	CONNECTIVITY STATUS INSTRUCTION -----		INDICATES WHETHER THE CONNECTIVITY OF THE SOURCE TRACK NUMBER AS RE- PORTED IN THE MESSAGE IS BEING ADDED OR DELETED.
		ADDED CONNECTIVITY	0	
		DELETED CONNECTIVITY	1	
		UNDEFINED	2 THROUGH 3	
1729	001	CONNECTIVITY STATUS LEVEL -----		
		CONNECTIVITY LEVEL, 0	0	CONNECTIVITY TO REFERENCED JU(S) IS DIRECTLY THROUGH SOURCE JU.
		CONNECTIVITY LEVEL, 1	1	CONNECTIVITY TO REFERENCED JU(S) IS THROUGH SOURCE JU AND JU 1.
		CONNECTIVITY LEVEL, 2	2	CONNECTIVITY TO REFERENCED JU(S) IS THROUGH SOURCE JU, JU 1, AND JU 2.
		CONNECTIVITY LEVEL, 3	3	CONNECTIVITY TO REFERENCED JU(S) IS THROUGH SOURCE JU, JU 1, JU 2, AND JU 3.
		CONNECTIVITY LEVEL, 4	4	CONNECTIVITY TO REFERENCED JU(S) IS THROUGH SOURCE JU, JU 1, JU 2, JU 3 AND JU 4.
		CONNECTIVITY LEVEL, 5	5	CONNECTIVITY TO REFERENCED JU(S) IS THROUGH SOURCE JU, JU 1, JU 2, JU 3, JU 4 AND JU 5.
		CONNECTIVITY LEVEL, 6	6	CONNECTIVITY TO REFERENCED JU(S) IS THROUGH SOURCE JU, JU 1, JU 2, JU 3, JU 4, JU 5 AND JU 6.
		CONNECTIVITY LEVEL, 7	7	CONNECTIVITY TO REFERENCED JU(S) IS THROUGH SOURCE JU, JU 1, JU 2, JU 3, JU 4, JU 5, JU 6 AND JU 7.
1725	001	CONNECTIVITY QUALITY, 1 -----		A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.
		NO MESSAGE RECEIVED FROM ASSOCIATED SOURCE OR ERASURE COUNT EXCEEDS 12(8-57,1) ERASURES	0	
		LESS THAN OR EQUAL TO 12(8-57,1) ERASURES	1	
		LESS THAN OR EQUAL TO 8(4-48,1) ERASURES	2	
		LESS THAN OR EQUAL TO 4(1-32,1) ERASURES	3	

			FIELD CODING FOR J1.1I	(SHEET 2)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	032	TRACK NUMBER, JU 1 -----		THE TN OF ONE OF A NUMBER OF JUS TO WHICH A MESSAGE CAN BE ADDRESSED.
		NO STATEMENT NUMERIC	0 00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		ILLEGAL NUMERIC	00077 (OCTAL) 00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC	00177 (OCTAL)	COLLECTIVE ADDRESS.
		NUMERIC	00200 THROUGH 07776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL NUMERIC	07777 (OCTAL) 10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.

.....

WORD TITLE: CONNECTIVITY STATUS EXTENSION WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02:	01	00:										
																			TRACK NUMBER, JU 4					:	CQ, 7	:	CQ, 6	:	CQ, 5	:	CQ, 4	:	WORD	:
																			TRACK NUMBER, JU 8					:	CQ, 11	:	CQ, 10	:	CQ, 9	:	CQ, 8	:	:FORMAT	:
																							:	2	:									

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
TRACK NUMBER, JU 6										:	TRACK NUMBER, JU 5										:			
TRACK NUMBER, JU 10										:	TRACK NUMBER, JU 9										:			
68																								

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50	
:	-----																				
:	TRACK NUMBER, JU 7															:	---				:
:	-----																				
:	TRACK NUMBER, JU 11															:	---				:
:	-----																				
:																					

WORD DESCRIPTION

WORD NUMBER: J1.1E0

WORD TITLE: CONNECTIVITY STATUS EXTENSION WORD

REFERENCE DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	10
1725 004	CONNECTIVITY QUALITY, 4 (CQ, 4)	2-	3 2	TRANSMITTED IN THE FIRST J1.1E0 WORD IN THE J1.1 MESSAGE.
1725 005	CONNECTIVITY QUALITY, 5 (CQ, 5)	4-	5 2	TRANSMITTED IN THE FIRST J1.1E0 WORD IN THE J1.1 MESSAGE. SAME CODING AS FOR BITS 2 AND 3.
1725 006	CONNECTIVITY QUALITY, 6 (CQ, 6)	6-	7 2	TRANSMITTED IN THE FIRST J1.1E0 WORD IN THE J1.1 MESSAGE. SAME CODING AS FOR BITS 2 AND 3.
1725 007	CONNECTIVITY QUALITY, 7 (CQ, 7)	8-	9 2	TRANSMITTED IN THE FIRST J1.1E0 WORD IN THE J1.1 MESSAGE. SAME CODING AS FOR BITS 2 AND 3.
769 035	TRACK NUMBER, JU 4	10-	24 15	TRANSMITTED IN THE FIRST J1.1E0 WORD IN THE J1.1 MESSAGE.
769 036	TRACK NUMBER, JU 5	25-	39 15	TRANSMITTED IN THE FIRST J1.1E0 WORD IN THE J1.1 MESSAGE. SAME CODING AS FOR BITS 10-24.
769 037	TRACK NUMBER, JU 6	40-	54 15	TRANSMITTED IN THE FIRST J1.1E0 WORD IN THE J1.1 MESSAGE. SAME CODING AS FOR BITS 10-24.
769 038	TRACK NUMBER, JU 7	55-	69 15	TRANSMITTED IN THE FIRST J1.1E0 WORD IN THE J1.1 MESSAGE. SAME CODING AS FOR BITS 10-24.
1725 008	CONNECTIVITY QUALITY, 8 (CQ, 8)	2-	3 2	TRANSMITTED IN THE FIRST REPETITION OF THE J1.1E0 WORD IN THE J1.1 MESSAGE. SAME CODING AS FOR BITS 2 AND 3.
1725 009	CONNECTIVITY QUALITY, 9 (CQ, 9)	4-	5 2	TRANSMITTED IN THE FIRST REPETITION OF THE J1.1E0 WORD IN THE J1.1 MESSAGE. SAME CODING AS FOR BITS 2 AND 3.
1725 010	CONNECTIVITY QUALITY, 10 (CQ, 10)	6-	7 2	TRANSMITTED IN THE FIRST REPETITION OF THE J1.1E0 WORD IN THE J1.1 MESSAGE. SAME CODING AS FOR BITS 2 AND 3.

WORD DESCRIPTION

WORD NUMBER: J1.1E0

WORD TITLE: CONNECTIVITY STATUS EXTENSION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1725	011	CONNECTIVITY QUALITY, 11 (CQ, 11)	8-	9 2	TRANSMITTED IN THE FIRST REPETITION OF THE J1.1E0 WORD IN THE J1.1 MESSAGE. SAME CODING AS FOR BITS 2 AND 3.
769	023	TRACK NUMBER, JU 8	10-	24 15	TRANSMITTED IN THE FIRST REPETITION OF THE J1.1E0 WORD IN THE J1.1 MESSAGE. SAME CODING AS FOR BITS 10-24.
769	011	TRACK NUMBER, JU 9	25-	39 15	TRANSMITTED IN THE FIRST REPETITION OF THE J1.1E0 WORD IN THE J1.1 MESSAGE. SAME CODING AS FOR BITS 10-24.
769	012	TRACK NUMBER, JU 10	40-	54 15	TRANSMITTED IN THE FIRST REPETITION OF THE J1.1E0 WORD IN THE J1.1 MESSAGE. SAME CODING AS FOR BITS 10-24.
769	013	TRACK NUMBER, JU 11	55-	69 15	TRANSMITTED IN THE FIRST REPETITION OF THE J1.1E0 WORD IN THE J1.1 MESSAGE. SAME CODING AS FOR BITS 10-24.

FIELD CODING FOR J1.1E0

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1725	004	CONNECTIVITY QUALITY, 4 -----		A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.
		NO MESSAGE RECEIVED FROM	0	
		ASSOCIATED SOURCE OR		
		ERASURE COUNT EXCEEDS		
		12(8-57,1) ERASURES		
		LESS THAN OR EQUAL TO	1	
		12(8-57,1) ERASURES		
		LESS THAN OR EQUAL TO	2	
		8(4-48,1) ERASURES		
		LESS THAN OR EQUAL TO	3	
		4(1-32,1) ERASURES		
769	035	TRACK NUMBER, JU 4 -----		THE TN OF ONE OF A NUMBER OF JUS TO WHICH A MESSAGE CAN BE ADDRESSED.
		NO STATEMENT	0	
		NUMERIC	00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		ILLEGAL	00077 (OCTAL)	
		NUMERIC	00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC	00177 (OCTAL)	COLLECTIVE ADDRESS.
		NUMERIC	00200 THROUGH 07776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL	07777 (OCTAL)	
		NUMERIC	10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.

WORD MAP

WORD NUMBER: J1.1C1
WORD TITLE: CONNECTIVITY STATUS CONTINUATION WORD 1

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00				
TRACK NUMBER, JU 8												:	CQ, 10	:	CQ, 9	:	CQ, 8	:	CONTINUATION WORD LABEL				:	WORD	:	FORMAT	:	
15												:	2	:	2	:	2	:	5				:	2	:			
49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25				
<---						:	TRACK NUMBER, JU 9															:	---		>			
						:																:						
						:	15															:						
					:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50			
					:	SPARE				:	RELAY LEVEL				:	COMMUNITY DESIGNATOR				:	TRACK NUMBER, JU 10							:
					:					:					:					:								:
					:	4				:	4				:	4				:	15							:

WORD DESCRIPTION

WORD NUMBER: J1.1C1
WORD TITLE: CONNECTIVITY STATUS CONTINUATION WORD 1

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	01
1551	001	CONTINUATION WORD LABEL	2-	6 5	00001
1725	008	CONNECTIVITY QUALITY, 8 (CQ, 8)	7-	8 2	
1725	009	CONNECTIVITY QUALITY, 9 (CQ, 9)	9-	10 2	SAME CODING AS FOR BITS 7 AND 8.
1725	010	CONNECTIVITY QUALITY, 10 (CQ, 10)	11-	12 2	SAME CODING AS FOR BITS 7 AND 8.
769	023	TRACK NUMBER, JU 8	13-	27 15	
769	011	TRACK NUMBER, JU 9	28-	42 15	SAME CODING AS FOR BITS 13-27.
769	012	TRACK NUMBER, JU 10	43-	57 15	SAME CODING AS FOR BITS 13-27.
1774	001	COMMUNITY DESIGNATOR	58-	61 4	
1775	001	RELAY LEVEL	62-	65 4	
756	004	SPARE	66-	69 4	

FIELD CODING FOR J1.1C1

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1725	008	CONNECTIVITY QUALITY, 8 -----		A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.
		NO MESSAGE RECEIVED FROM ASSOCIATED SOURCE OR ERASURE COUNT EXCEEDS 12(8-57,1) ERASURES LESS THAN OR EQUAL TO 12(8-57,1) ERASURES LESS THAN OR EQUAL TO 8(4-48,1) ERASURES LESS THAN OR EQUAL TO 4(1-32,1) ERASURES	0 1 2 3	
769	023	TRACK NUMBER, JU 8 -----		THE TN OF ONE OF A NUMBER OF JUS TO WHICH A MESSAGE CAN BE ADDRESSED.
		NO STATEMENT NUMERIC	0 00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		ILLEGAL NUMERIC	00077 (OCTAL) 00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC	00177 (OCTAL)	COLLECTIVE ADDRESS.
		NUMERIC	00200 THROUGH 07776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL NUMERIC	07777 (OCTAL) 10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
1774	001	COMMUNITY DESIGNATOR -----		A NUMERICAL VALUE USED TO IDENTIFY A GROUP OF JUS AS ASSOCIATED WITH A PARTICULAR ARMY DIVISION WHEN PAR- TICIPATING IN THE ARMY CENTRALIZED NET MANAGEMENT.
		NO STATEMENT	0	

FIELD CODING FOR J1.1C1 (SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1774	001	COMMUNITY DESIGNATOR -----	(CONTINUED)	
		COMMUNITY DESIGNATOR	1 THROUGH 15	
1775	001	RELAY LEVEL -----		INDICATES THE DISTANCE IN RELAY HOPS BETWEEN TWO UNITS.
		NO STATEMENT	0	
		1 THROUGH 7 RELAY HOPS	1 THROUGH 7	
		UNDEFINED	8 THROUGH 15	

.....

WORD TITLE: CONNECTIVITY STATUS CONTINUATION WORD 2

[illegible][illegible]

WORD DESCRIPTION

WORD NUMBER: J1.1C2

WORD TITLE: CONNECTIVITY STATUS CONTINUATION WORD 2

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	01
1551	001	CONTINUATION WORD LABEL	2-	6 5	00010
1725	013	CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 1 (CQ, 1)	7-	8 2	
1725	014	CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 2 (CQ, 2)	9-	10 2	SAME CODING AS FOR BITS 7 AND 8.
1725	015	CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 3 (CQ, 3)	11-	12 2	SAME CODING AS FOR BITS 7 AND 8.
1725	016	CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 4 (CQ, 4)	13-	14 2	SAME CODING AS FOR BITS 7 AND 8.
1725	017	CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 5 (CQ, 5)	15-	16 2	SAME CODING AS FOR BITS 7 AND 8.
1725	018	CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 6 (CQ, 6)	17-	18 2	SAME CODING AS FOR BITS 7 AND 8.
1725	019	CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 7 (CQ, 7)	19-	20 2	SAME CODING AS FOR BITS 7 AND 8.
1725	020	CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 8 (CQ, 8)	21-	22 2	SAME CODING AS FOR BITS 7 AND 8.
1725	021	CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 9 (CQ, 9)	23-	24 2	SAME CODING AS FOR BITS 7 AND 8.
1725	022	CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 10 (CQ, 10)	25-	26 2	SAME CODING AS FOR BITS 7 AND 8.
1725	023	CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 11 (CQ, 11)	27-	28 2	SAME CODING AS FOR BITS 7 AND 8.
1725	024	CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 12 (CQ, 12)	29-	30 2	SAME CODING AS FOR BITS 7 AND 8.

WORD DESCRIPTION

WORD NUMBER: J1.1C2

WORD TITLE: CONNECTIVITY STATUS CONTINUATION WORD 2

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1725 025		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 13 (CQ, 13)	31- 32	2	SAME CODING AS FOR BITS 7 AND 8.
1725 026		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 14 (CQ, 14)	33- 34	2	SAME CODING AS FOR BITS 7 AND 8.
1725 027		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 15 (CQ, 15)	35- 36	2	SAME CODING AS FOR BITS 7 AND 8.
1725 028		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 16 (CQ, 16)	37- 38	2	SAME CODING AS FOR BITS 7 AND 8.
1725 029		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 17 (CQ, 17)	39- 40	2	SAME CODING AS FOR BITS 7 AND 8.
1725 030		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 18 (CQ, 18)	41- 42	2	SAME CODING AS FOR BITS 7 AND 8.
1725 031		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 19 (CQ, 19)	43- 44	2	SAME CODING AS FOR BITS 7 AND 8.
1725 032		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 20 (CQ, 20)	45- 46	2	SAME CODING AS FOR BITS 7 AND 8.
1725 033		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 21 (CQ, 21)	47- 48	2	SAME CODING AS FOR BITS 7 AND 8.
1725 034		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 22 (CQ, 22)	49- 50	2	SAME CODING AS FOR BITS 7 AND 8.
1725 035		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 23 (CQ, 23)	51- 52	2	SAME CODING AS FOR BITS 7 AND 8.
1725 036		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 24 (CQ, 24)	53- 54	2	SAME CODING AS FOR BITS 7 AND 8.

WORD DESCRIPTION

WORD NUMBER: J1.1C2

WORD TITLE: CONNECTIVITY STATUS CONTINUATION WORD 2

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1725 037		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 25 (CQ, 25)	55- 56	2	SAME CODING AS FOR BITS 7 AND 8.
1725 038		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 26 (CQ, 26)	57- 58	2	SAME CODING AS FOR BITS 7 AND 8.
1725 039		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 27 (CQ, 27)	59- 60	2	SAME CODING AS FOR BITS 7 AND 8.
1725 040		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 28 (CQ, 28)	61- 62	2	SAME CODING AS FOR BITS 7 AND 8.
1725 041		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 29 (CQ, 29)	63- 64	2	SAME CODING AS FOR BITS 7 AND 8.
1725 042		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 30 (CQ, 30)	65- 66	2	SAME CODING AS FOR BITS 7 AND 8.
1725 043		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 31 (CQ, 31)	67- 68	2	SAME CODING AS FOR BITS 7 AND 8.
756 001		SPARE (SP)	69	1	

FIELD CODING FOR J1.1C2 (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1725	013	CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 1		A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.

		NO MESSAGE RECEIVED FROM ASSOCIATED SOURCE OR ERASURE COUNT EXCEEDS 12(8-57,1) ERASURES	0	
		LESS THAN OR EQUAL TO 12(8-57,1) ERASURES	1	
		LESS THAN OR EQUAL TO 8(4-48,1) ERASURES	2	
		LESS THAN OR EQUAL TO 4(1-32,1) ERASURES	3	

MIL-STD-6016B

J1.2 MESSAGE SUMMARY

PURPOSE

The J1.2 Route Establishment message is used to establish a route for relay/destination control.

DATA ELEMENT SUMMARY

<u>J1.2I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
ACTION/INFORMATION INDICATOR, 4	2
TRACK NUMBER, ORIGINATOR	15
TRACK NUMBER, DESTINATION	15
MINIMUM CONNECTIVITY QUALITY REQUESTED	2
ALLOCATED PG INDEX NUMBER	9
ROUTE NUMBER, RELAY	4
MAXIMUM CONNECTIVITY QUALITY PROVIDED	2
SPARE	8

<u>J1.2E0</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
TRACK NUMBER, RELAY 1	15
TRACK NUMBER, RELAY 2	15
TRACK NUMBER, RELAY 3	15
TRACK NUMBER, RELAY 4	15
SPARE	8

<u>J1.2E1</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
TRACK NUMBER, RELAY 5	15
TRACK NUMBER, RELAY 6	15
TRACK NUMBER, RELAY 7	15
SPARE	23

J1.2 TRANSMIT/RECEIVE RULES

TITLE: Route Establishment Message

TRANSMIT RULES

1. The J1.2 Route Establishment message shall be transmitted by any JU involved in ground-to-ground communications when establishing a route to be associated with the source and the given relays.

2. When an Originator JU generates the J1.2 Route Establishment message, it shall fulfill the J1.2I message and the J1.2E0 and J1.2E1 extension words in accordance with the following requirements:

a. The Originator JU shall set the Action/Information Indicator to value 1, Route Request, to request the relay JUs to proceed the route establishment, or to value 3, Route Deletion, to request the relay JUs to delete the route.

b. The Originator JU shall transmit the Route Establishment message using the repromulgation relay protocol. The PG index number to be used for transmission shall be the predefined/host-provided Route Establishment PG index. The Route Index Number of the Repromulgation Relay message (J0.5) shall be set to value zero.

c. When it generates a J1.2 message with the Action/Information Indicator set to value 1, Route Request, the Originator JU shall set field Maximum Connectivity Quality Provided to the value 3, the seven Relay Track Numbers fields to the value zero, and the fields Minimum Connectivity Quality Requested, Track Number, Destination, Allocated PG Index Number, Allocated Route Number, and TN, Originator to the values requested by the host.

d. When it generates a J1.2 message with the Action/Information Indicator to value 3, Route Deletion, the originator JU shall transmit a J1.2I initial word only without any extension word. It shall set the fields of the J1.2I word to the value requested by the host.

J1.2 TRANSMIT/RECEIVE RULES (Continued)

TRANSMIT RULES (Continued)

3. When a JU relays the J1.2 Route Establishment message with the Action/Information Indicator set to value 1, Route Request, the JU shall transmit it as follows:

a. The JU shall add the JU primary track number at the first Track Number, Relay field that contains zero.

b. The JU shall update the Maximum Connectivity Quality provided. To do this update, the JU shall compute the minimum between the Maximum Connectivity Quality Provided and the last hop connectivity quality and put this value in the Maximum Connectivity Quality Provided field in the repromulgated message.

4. When a JU relays the J1.2 Route Establishment message with the Action/Information Indicator set to value 2, Route Establishment, the terminal shall retransmit the message without any modification.

RECEIVE RULES

1. When a JU receives the J1.2 Route Establishment message and the Action/Information Indicator is set to value 1, Route Request, it shall repromulgate the message only if all the following conditions are met:

a. The Terminal is not a relay for the given PG and route number, (the corresponding RRIP is already set to value 1).

b. The quality of the last hop is equal or greater than the message given Minimum Connectivity Quality Requested.

c. The Track Number, Destination does not meet the primary track number or one of the secondary track numbers of the Terminal.

d. The conditions defined in the repromulgation relay protocol are met.

J1.2 TRANSMIT/RECEIVE RULES (Continued)

RECEIVE RULES (Continued)

2. When a JU receives a Route Establishment message with the Action/Information Indicator set to value 1, Route Request, and with the Destination Track Number matching the primary track number or one of the secondary track numbers of the JU, the JU shall process the following action:

a. When the host is active, the JU shall generate and send a response. The response is constructed from the received message as follows:

(1) The Action/Information Indicator is set to value 2, Route Establishment.

(2) The fields TN, Originator and TN, Destination of the response shall be set respectively to the value of TN, Destination and TN, Originator of the received Route Establishment message.

(3) The TN, Relay and Connectivity Quality fields of the response shall be a copy of the same fields of the received Route Establishment message.

This message shall be sent in accordance with Transmit Rule 2.b.

b. The JU shall set the IRIP corresponding to the request to 0.

3. When a JU receives a Route Establishment message and the Action/Information Indicator is set to value 2, Route Establishment, the JU has to retransmit the message as requested. When the JU primary track number is in the Track Number, Relay list, the JU shall modify its corresponding RRIP and set it to 0.

4. When the JU receives a Route Establishment message and the Action/Information Indicator is set to value 3, Route Deletions, the JU shall set its corresponding RRIP to 1.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J1.2I
WORD TITLE: ROUTE ESTABLISHMENT INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00				
TRACK NUMBER, ORIGINATOR										:	AII 4	:	MESSAGE LENGTH INDICATOR		:	SUBLABEL, J-SERIES		:	LABEL, J-SERIES			:	WORD FORMAT		:			
15										:	2	:	3		:	3		:	5			:	2		:			
49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25				
<---		:	CQ MIN		:	TRACK NUMBER, DESTINATION															:				:	---		>
		:	2		:	15															:				:			
					:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50			
					:	SPARE										:	CQ MAX		:	ROUTE NUMBER, RELAY		:	ALLOCATED PG INDEX NUMBER					
					:											:			:			:						
					:	8										:	2		:	4		:	9					

WORD DESCRIPTION

WORD NUMBER: J1.2I

WORD TITLE: ROUTE ESTABLISHMENT INITIAL WORD

REFERENCE			BIT	#	
DFI/DUI	DATA FIELD	DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD	FORMAT	0-	1 2	00
270 004	LABEL,	J-SERIES	2-	6 5	00001
271 005	SUBLABEL,	J-SERIES	7-	9 3	010
800 001	MESSAGE	LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
1740 004	ACTION/INFORMATION	INDICATOR, 4 (AII 4)	13-	14 2	
769 063	TRACK	NUMBER, ORIGINATOR	15-	29 15	
769 064	TRACK	NUMBER, DESTINATION	30-	44 15	
1725 141	MINIMUM	CONNECTIVITY QUALITY REQUESTED (CQ MIN)	45-	46 2	
1783 001	ALLOCATED	PG INDEX NUMBER	47-	55 9	
1784 001	ROUTE	NUMBER, RELAY (RN REL)	56-	59 4	
1725 142	MAXIMUM	CONNECTIVITY QUALITY PROVIDED (CQ MAX)	60-	61 2	
756 008	SPARE		62-	69 8	

FIELD CODING FOR J1.2I

(SHEET 1)


DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1740	004	ACTION/INFORMATION INDICATOR, 4 -----		INDICATES THE ACTION TO BE PERFORMED FOR REPRM RELAY REPORTING.
		NO STATEMENT	0	
		ROUTE REQUEST	1	
		ROUTE ESTABLISHMENT	2	
		ROUTE DELETION	3	
769	063	TRACK NUMBER, ORIGINATOR -----		THE TN OF THE JU AT THE ORIGIN OF THE ROUTE ESTABLISHMENT MESSAGE.
		NO STATEMENT	0	
		NUMERIC	00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		ILLEGAL NUMERIC	00077 (OCTAL) 00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC	00177 (OCTAL)	COLLECTIVE ADDRESS.
		NUMERIC	00200 THROUGH 07776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL NUMERIC	07777 (OCTAL) 10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
769	064	TRACK NUMBER, DESTINATION -----		THE TN OF THE JU TO WHICH THE MESSAGE IS ADDRESSED.
		NO STATEMENT	0	
		NUMERIC	00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		ILLEGAL NUMERIC	00077 (OCTAL) 00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC	00177 (OCTAL)	COLLECTIVE ADDRESS.

			FIELD CODING FOR J1.2I	(SHEET 2)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	064	TRACK NUMBER, DESTINATION ----- NUMERIC	(CONTINUED) 00200 THROUGH 07776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL NUMERIC	07777 (OCTAL) 10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
1725	141	MINIMUM CONNECTIVITY QUALITY REQUESTED ----- NUMERIC	0 THROUGH 3	INDICATES THE MINIMUM CONNECTIVITY QUALITY ALL ALONG THE ROUTE REQUESTED BY THE ORIGINATOR UNIT. 0 LOWEST CONNECTIVITY QUALITY. 3 HIGHEST CONNECTIVITY QUALITY.
1783	001	ALLOCATED PG INDEX NUMBER ----- NO STATEMENT NUMERIC	0 1 THROUGH 511	INDICATES THE PG INDEX ON WHICH THE REPROG ROUTE IS TO BE ESTABLISHED.
1784	001	ROUTE NUMBER, RELAY ----- NO STATEMENT NUMERIC	0 1 THROUGH 15	INDICATES THE NUMBER ON WHICH THE REPROG ROUTE IS TO BE ESTABLISHED.
1725	142	MAXIMUM CONNECTIVITY QUALITY PROVIDED ----- NUMERIC	0 THROUGH 3	INDICATES THE MAXIMUM CONNECTIVITY QUALITY OF THE ROUTE. 0 LOWEST CONNECTIVITY QUALITY. 3 HIGHEST CONNECTIVITY QUALITY.

WORD MAP

WORD NUMBER: J1.2E0

WORD TITLE: SET MANAGEMENT EXTENSION WORD 1

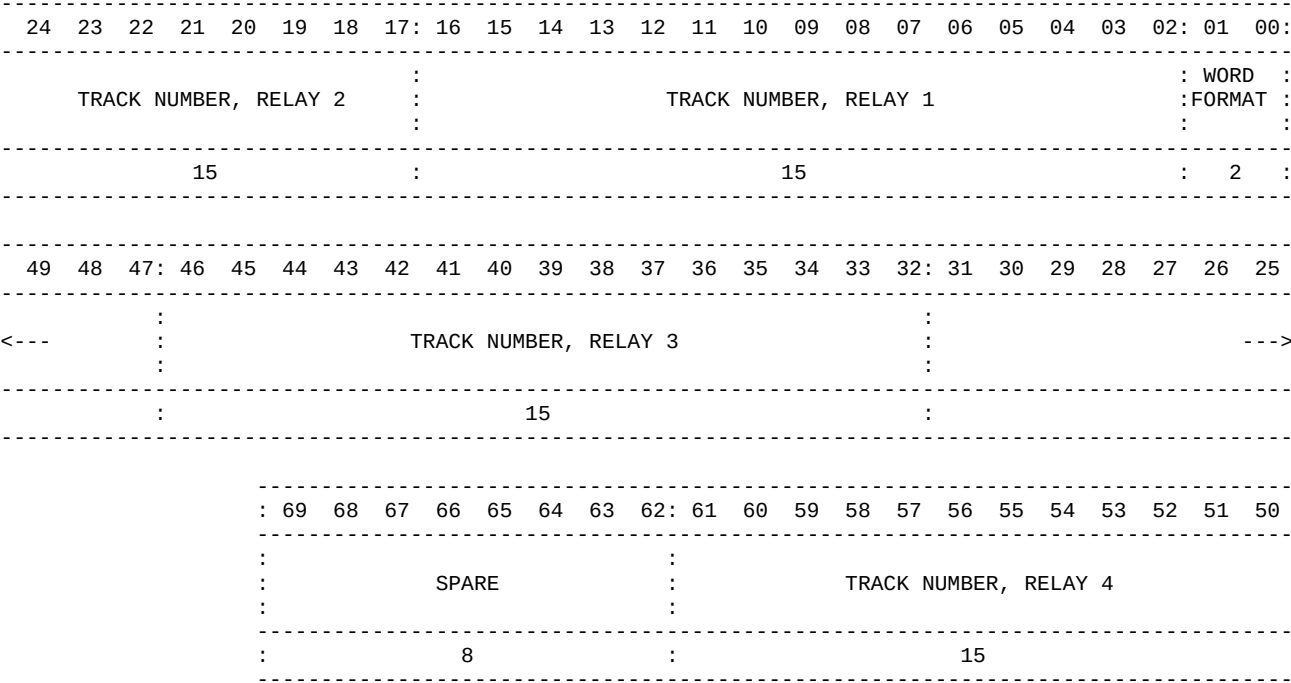

WORD DESCRIPTION

WORD NUMBER: J1.2E0

WORD TITLE: SET MANAGEMENT EXTENSION WORD 1

REFERENCE		BIT #		RESOLUTION, CODING, ETC
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	
1550 001	WORD FORMAT	0-	1 2	10
769 065	TRACK NUMBER, RELAY 1	2-	16 15	
769 066	TRACK NUMBER, RELAY 2	17-	31 15	SAME CODING AS FOR BITS 2-16.
769 067	TRACK NUMBER, RELAY 3	32-	46 15	SAME CODING AS FOR BITS 2-16.
769 068	TRACK NUMBER, RELAY 4	47-	61 15	SAME CODING AS FOR BITS 2-16.
756 008	SPARE	62-	69 8	

FIELD CODING FOR J1.2E0

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	065	TRACK NUMBER, RELAY 1 -----		THE TN OF THE FIRST RELAY UNIT ON THE ROUTE.
		NO STATEMENT	0	
		NUMERIC	00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		ILLEGAL	00077 (OCTAL)	
		NUMERIC	00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC	00177 (OCTAL)	COLLECTIVE ADDRESS.
		NUMERIC	00200 THROUGH 07776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL	07777 (OCTAL)	
		NUMERIC	10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.

WORD MAP

WORD NUMBER: J1.2E1

WORD TITLE: SET MANAGEMENT EXTENSION WORD 2

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00	:
TRACK NUMBER, RELAY 6								:	TRACK NUMBER, RELAY 5														:	WORD	:
								:															:	FORMAT	:
								:															:		:
15								:	15														:	2	:
49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25	:
<---			:	TRACK NUMBER, RELAY 7														:	---					>---	
			:															:							
			:	15														:							
			:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50		
			:	SPARE																					
			:																						
			:	23																					

WORD DESCRIPTION

WORD NUMBER: J1.2E1

WORD TITLE: SET MANAGEMENT EXTENSION WORD 2

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	10
769 069	TRACK NUMBER, RELAY 5	2-	16 15	
769 070	TRACK NUMBER, RELAY 6	17-	31 15	SAME CODING AS FOR BITS 2-16.
769 071	TRACK NUMBER, RELAY 7	32-	46 15	SAME CODING AS FOR BITS 2-16.
756 023	SPARE	47-	69 23	

FIELD CODING FOR J1.2E1

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	069	TRACK NUMBER, RELAY 5 -----		THE TN OF THE FIFTH RELAY UNIT ON THE ROUTE.
		NO STATEMENT	0	
		NUMERIC	00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		ILLEGAL	00077 (OCTAL)	
		NUMERIC	00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC	00177 (OCTAL)	COLLECTIVE ADDRESS.
		NUMERIC	00200 THROUGH 07776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL	07777 (OCTAL)	
		NUMERIC	10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

J1.3 MESSAGE SUMMARY

PURPOSE

The J1.3 Acknowledgement message is used by a JU involved in ground-to-ground communications to respond to messages which require machine receipt/compliance.

DATA ELEMENT SUMMARY

<u>J1.3I</u>		<u>J1.3I (Continued)</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	SEQUENTIAL BLOCK/FIELD FLAG,	1
LABEL, J-SERIES	5	22	
SUBLABEL, J-SERIES	3	SEQUENTIAL BLOCK/FIELD FLAG,	1
MESSAGE LENGTH INDICATOR	3	23	
ACKNOWLEDGEMENT DATA	1	SEQUENTIAL BLOCK/FIELD FLAG,	1
DESIGNATOR		24	
ACKNOWLEDGEMENT DATA AMPLIFIER	1	SEQUENTIAL BLOCK/FIELD FLAG,	1
TRACK NUMBER, JU	15	25	
BLOCK SIZE INDICATOR	1	SEQUENTIAL BLOCK/FIELD FLAG,	1
SEQUENTIAL BLOCK/FIELD FLAG, 1	1	26	
SEQUENTIAL BLOCK/FIELD FLAG, 2	1	SEQUENTIAL BLOCK/FIELD FLAG,	1
SEQUENTIAL BLOCK/FIELD FLAG, 3	1	27	
SEQUENTIAL BLOCK/FIELD FLAG, 4	1	SEQUENTIAL BLOCK/FIELD FLAG,	1
SEQUENTIAL BLOCK/FIELD FLAG, 5	1	28	
SEQUENTIAL BLOCK/FIELD FLAG, 6	1	SEQUENTIAL BLOCK/FIELD FLAG,	1
SEQUENTIAL BLOCK/FIELD FLAG, 7	1	29	
SEQUENTIAL BLOCK/FIELD FLAG, 8	1	SEQUENTIAL BLOCK/FIELD FLAG,	1
SEQUENTIAL BLOCK/FIELD FLAG, 9	1	30	
SEQUENTIAL BLOCK/FIELD FLAG,	1	SEQUENTIAL BLOCK/FIELD FLAG,	1
10		31	
SEQUENTIAL BLOCK/FIELD FLAG,	1	SEQUENTIAL BLOCK/FIELD FLAG,	1
11		32	
SEQUENTIAL BLOCK/FIELD FLAG,	1	SEQUENTIAL BLOCK/FIELD FLAG,	1
12		33	
SEQUENTIAL BLOCK/FIELD FLAG,	1	SEQUENTIAL BLOCK/FIELD FLAG,	1
13		34	
SEQUENTIAL BLOCK/FIELD FLAG,	1	SEQUENTIAL BLOCK/FIELD FLAG,	1
14		35	
SEQUENTIAL BLOCK/FIELD FLAG,	1	SEQUENTIAL BLOCK/FIELD FLAG,	1
15		36	
SEQUENTIAL BLOCK/FIELD FLAG,	1	SEQUENTIAL BLOCK/FIELD FLAG,	1
16		37	
SEQUENTIAL BLOCK/FIELD FLAG,	1	SEQUENTIAL BLOCK/FIELD FLAG,	1
17		38	
SEQUENTIAL BLOCK/FIELD FLAG,	1	SEQUENTIAL BLOCK/FIELD FLAG,	1
18		39	
SEQUENTIAL BLOCK/FIELD FLAG,	1		
19			
SEQUENTIAL BLOCK/FIELD FLAG,	1		
20			
SEQUENTIAL BLOCK/FIELD FLAG,	1		
21			

J1.3E0

DATA ELEMENT	# BITS
WORD FORMAT	2
SEQUENTIAL BLOCK/FIELD FLAG,	1
40	

MIL-STD-6016B

J1.3 MESSAGE SUMMARY (Continued)

DATA ELEMENT SUMMARY (Continued)

J1.3E0 (Continued)		J1.3E0 (Continued)	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
SEQUENTIAL BLOCK/FIELD FLAG, 41	1	SEQUENTIAL BLOCK/FIELD FLAG, 65	1
SEQUENTIAL BLOCK/FIELD FLAG, 42	1	SEQUENTIAL BLOCK/FIELD FLAG, 66	1
SEQUENTIAL BLOCK/FIELD FLAG, 43	1	SEQUENTIAL BLOCK/FIELD FLAG, 67	1
SEQUENTIAL BLOCK/FIELD FLAG, 44	1	SEQUENTIAL BLOCK/FIELD FLAG, 68	1
SEQUENTIAL BLOCK/FIELD FLAG, 45	1	SEQUENTIAL BLOCK/FIELD FLAG, 69	1
SEQUENTIAL BLOCK/FIELD FLAG, 46	1	SEQUENTIAL BLOCK/FIELD FLAG, 70	1
SEQUENTIAL BLOCK/FIELD FLAG, 47	1	SEQUENTIAL BLOCK/FIELD FLAG, 71	1
SEQUENTIAL BLOCK/FIELD FLAG, 48	1	SEQUENTIAL BLOCK/FIELD FLAG, 72	1
SEQUENTIAL BLOCK/FIELD FLAG, 49	1	SEQUENTIAL BLOCK/FIELD FLAG, 73	1
SEQUENTIAL BLOCK/FIELD FLAG, 50	1	SEQUENTIAL BLOCK/FIELD FLAG, 74	1
SEQUENTIAL BLOCK/FIELD FLAG, 51	1	SEQUENTIAL BLOCK/FIELD FLAG, 75	1
SEQUENTIAL BLOCK/FIELD FLAG, 52	1	SEQUENTIAL BLOCK/FIELD FLAG, 76	1
SEQUENTIAL BLOCK/FIELD FLAG, 53	1	SEQUENTIAL BLOCK/FIELD FLAG, 77	1
SEQUENTIAL BLOCK/FIELD FLAG, 54	1	SEQUENTIAL BLOCK/FIELD FLAG, 78	1
SEQUENTIAL BLOCK/FIELD FLAG, 55	1	SEQUENTIAL BLOCK/FIELD FLAG, 79	1
SEQUENTIAL BLOCK/FIELD FLAG, 56	1	SEQUENTIAL BLOCK/FIELD FLAG, 80	1
SEQUENTIAL BLOCK/FIELD FLAG, 57	1	SEQUENTIAL BLOCK/FIELD FLAG, 81	1
SEQUENTIAL BLOCK/FIELD FLAG, 58	1	SEQUENTIAL BLOCK/FIELD FLAG, 82	1
SEQUENTIAL BLOCK/FIELD FLAG, 59	1	SEQUENTIAL BLOCK/FIELD FLAG, 83	1
SEQUENTIAL BLOCK/FIELD FLAG, 60	1	SEQUENTIAL BLOCK/FIELD FLAG, 84	1
SEQUENTIAL BLOCK/FIELD FLAG, 61	1	SEQUENTIAL BLOCK/FIELD FLAG, 85	1
SEQUENTIAL BLOCK/FIELD FLAG, 62	1	SEQUENTIAL BLOCK/FIELD FLAG, 86	1
SEQUENTIAL BLOCK/FIELD FLAG, 63	1	SEQUENTIAL BLOCK/FIELD FLAG, 87	1
SEQUENTIAL BLOCK/FIELD FLAG, 64	1	SEQUENTIAL BLOCK/FIELD FLAG, 88	1

J1.3 MESSAGE SUMMARY (Continued)

DATA ELEMENT SUMMARY (Continued)

J1.3E0 (Continued)	
DATA ELEMENT	# BITS
SEQUENTIAL BLOCK/FIELD FLAG, 89	1
SEQUENTIAL BLOCK/FIELD FLAG, 90	1
SEQUENTIAL BLOCK/FIELD FLAG, 91	1
SEQUENTIAL BLOCK/FIELD FLAG, 92	1
SEQUENTIAL BLOCK/FIELD FLAG, 93	1
SEQUENTIAL BLOCK/FIELD FLAG, 94	1
SEQUENTIAL BLOCK/FIELD FLAG, 95	1
SEQUENTIAL BLOCK/FIELD FLAG, 96	1
SEQUENTIAL BLOCK/FIELD FLAG, 97	1
SEQUENTIAL BLOCK/FIELD FLAG, 98	1
SEQUENTIAL BLOCK/FIELD FLAG, 99	1
SEQUENTIAL BLOCK/FIELD FLAG, 100	1
SEQUENTIAL BLOCK/FIELD FLAG, 101	1
SEQUENTIAL BLOCK/FIELD FLAG, 102	1
SEQUENTIAL BLOCK/FIELD FLAG, 103	1
SEQUENTIAL BLOCK/FIELD FLAG, 104	1
SEQUENTIAL BLOCK/FIELD FLAG, 105	1
SEQUENTIAL BLOCK/FIELD FLAG, 106	1
SEQUENTIAL BLOCK/FIELD FLAG, 107	1

MIL-STD-6016B

J1.3 TRANSMIT/RECEIVE RULES

TITLE: Acknowledgement Message

TRANSMIT RULES

The J1.3 Acknowledgement message shall be transmitted by any JU involved in ground-to-ground communications when responding to messages which require machine R/C. The JU TN field shall include the address of the JU that either received an erroneous message or was responsible for an abort of the route.

RECEIVE RULES

Upon receipt of a J1.3 message, the addressed JU that is a relay on the given route shall retransmit the J1.3 message and monitor the net for the retransmission of the J1.3 message by the next relay on the route or by the retransmission of the original message by the source. If the retransmission is unsuccessful an alert shall be sent to the operator.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: ACKNOWLEDGEMENT INITIAL WORD

24	23	22	21	20	19	18	17	16	15:	14:	13:	12	11	10:	09	08	07:	06	05	04	03	02:	01	00:				
TRACK NUMBER, JU									:ACK:	:ACK:	MESSAGE			:	SUBLABEL,			:	LABEL, J-SERIES			:	WORD		:			
									:DA	:DD	LENGTH			:	J-SERIES			:	LABEL, J-SERIES			:	FORMAT		:			
									:	:	INDICATOR			:				:				:			:			
15									:	1	:	1	:	3			:	3			:	5			:	2		:

[illegible][illegible]

WORD DESCRIPTION

WORD NUMBER: J1.3I

WORD TITLE: ACKNOWLEDGEMENT INITIAL WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	00
270	004	LABEL, J-SERIES	2-	6 5	00001
271	005	SUBLABEL, J-SERIES	7-	9 3	011
800	001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
795	001	ACKNOWLEDGEMENT DATA DESIGNATOR (ACK DD)	13	1	
796	001	ACKNOWLEDGEMENT DATA AMPLIFIER (ACK DA)	14	1	
769	056	TRACK NUMBER, JU	15-	29 15	
798	001	BLOCK SIZE INDICATOR (BSI)	30	1	
799	001	SEQUENTIAL BLOCK/FIELD FLAG, 1 (SBF F1)	31	1	
799	002	SEQUENTIAL BLOCK/FIELD FLAG, 2 (SBF F2)	32	1	SAME CODING AS FOR BIT 31.
799	003	SEQUENTIAL BLOCK/FIELD FLAG, 3 (SBF F3)	33	1	SAME CODING AS FOR BIT 31.
799	004	SEQUENTIAL BLOCK/FIELD FLAG, 4 (SBF F4)	34	1	SAME CODING AS FOR BIT 31.
799	005	SEQUENTIAL BLOCK/FIELD FLAG, 5 (SBF F5)	35	1	SAME CODING AS FOR BIT 31.
799	006	SEQUENTIAL BLOCK/FIELD FLAG, 6 (SBF F6)	36	1	SAME CODING AS FOR BIT 31.
799	007	SEQUENTIAL BLOCK/FIELD FLAG, 7 (SBF F7)	37	1	SAME CODING AS FOR BIT 31.
799	008	SEQUENTIAL BLOCK/FIELD FLAG, 8 (SBF F8)	38	1	SAME CODING AS FOR BIT 31.
799	009	SEQUENTIAL BLOCK/FIELD FLAG, 9 (SBF F9)	39	1	SAME CODING AS FOR BIT 31.
799	010	SEQUENTIAL BLOCK/FIELD FLAG, 10 (SBF F10)	40	1	SAME CODING AS FOR BIT 31.
799	011	SEQUENTIAL BLOCK/FIELD FLAG, 11 (SBF F11)	41	1	SAME CODING AS FOR BIT 31.
799	012	SEQUENTIAL BLOCK/FIELD FLAG, 12 (SBF F12)	42	1	SAME CODING AS FOR BIT 31.
799	013	SEQUENTIAL BLOCK/FIELD FLAG, 13 (SBF F13)	43	1	SAME CODING AS FOR BIT 31.

WORD DESCRIPTION

WORD NUMBER: J1.3I

WORD TITLE: ACKNOWLEDGEMENT INITIAL WORD

REFERENCE	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
799 014	SEQUENTIAL BLOCK/FIELD FLAG, 14 (SBF F14)	44	1	SAME CODING AS FOR BIT 31.
799 015	SEQUENTIAL BLOCK/FIELD FLAG, 15 (SBF F15)	45	1	SAME CODING AS FOR BIT 31.
799 016	SEQUENTIAL BLOCK/FIELD FLAG, 16 (SBF F16)	46	1	SAME CODING AS FOR BIT 31.
799 017	SEQUENTIAL BLOCK/FIELD FLAG, 17 (SBF F17)	47	1	SAME CODING AS FOR BIT 31.
799 018	SEQUENTIAL BLOCK/FIELD FLAG, 18 (SBF F18)	48	1	SAME CODING AS FOR BIT 31.
799 019	SEQUENTIAL BLOCK/FIELD FLAG, 19 (SBF F19)	49	1	SAME CODING AS FOR BIT 31.
799 020	SEQUENTIAL BLOCK/FIELD FLAG, 20 (SBF F20)	50	1	SAME CODING AS FOR BIT 31.
799 021	SEQUENTIAL BLOCK/FIELD FLAG, 21 (SBF F21)	51	1	SAME CODING AS FOR BIT 31.
799 022	SEQUENTIAL BLOCK/FIELD FLAG, 22 (SBF F22)	52	1	SAME CODING AS FOR BIT 31.
799 023	SEQUENTIAL BLOCK/FIELD FLAG, 23 (SBF F23)	53	1	SAME CODING AS FOR BIT 31.
799 024	SEQUENTIAL BLOCK/FIELD FLAG, 24 (SBF F24)	54	1	SAME CODING AS FOR BIT 31.
799 025	SEQUENTIAL BLOCK/FIELD FLAG, 25 (SBF F25)	55	1	SAME CODING AS FOR BIT 31.
799 026	SEQUENTIAL BLOCK/FIELD FLAG, 26 (SBF F26)	56	1	SAME CODING AS FOR BIT 31.
799 027	SEQUENTIAL BLOCK/FIELD FLAG, 27 (SBF F27)	57	1	SAME CODING AS FOR BIT 31.
799 028	SEQUENTIAL BLOCK/FIELD FLAG, 28 (SBF F28)	58	1	SAME CODING AS FOR BIT 31.
799 029	SEQUENTIAL BLOCK/FIELD FLAG, 29 (SBF F29)	59	1	SAME CODING AS FOR BIT 31.
799 030	SEQUENTIAL BLOCK/FIELD FLAG, 30 (SBF F30)	60	1	SAME CODING AS FOR BIT 31.
799 031	SEQUENTIAL BLOCK/FIELD FLAG, 31 (SBF F31)	61	1	SAME CODING AS FOR BIT 31.
799 032	SEQUENTIAL BLOCK/FIELD FLAG, 32 (SBF F32)	62	1	SAME CODING AS FOR BIT 31.

WORD DESCRIPTION

WORD NUMBER: J1.3I
WORD TITLE: ACKNOWLEDGEMENT INITIAL WORD

REFERENCE			BIT	#	
DFI/DUI	DATA FIELD	DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
799 033	SEQUENTIAL BLOCK/FIELD FLAG,	33 (SBF F33)	63	1	SAME CODING AS FOR BIT 31.
799 034	SEQUENTIAL BLOCK/FIELD FLAG,	34 (SBF F34)	64	1	SAME CODING AS FOR BIT 31.
799 035	SEQUENTIAL BLOCK/FIELD FLAG,	35 (SBF F35)	65	1	SAME CODING AS FOR BIT 31.
799 036	SEQUENTIAL BLOCK/FIELD FLAG,	36 (SBF F36)	66	1	SAME CODING AS FOR BIT 31.
799 037	SEQUENTIAL BLOCK/FIELD FLAG,	37 (SBF F37)	67	1	SAME CODING AS FOR BIT 31.
799 038	SEQUENTIAL BLOCK/FIELD FLAG,	38 (SBF F38)	68	1	SAME CODING AS FOR BIT 31.
799 039	SEQUENTIAL BLOCK/FIELD FLAG,	39 (SBF F39)	69	1	SAME CODING AS FOR BIT 31.

FIELD CODING FOR J1.3I				(SHEET 1)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
795	001	ACKNOWLEDGEMENT DATA DESIGNATOR -----		INDICATES THE TYPE OF ACKNOWLEDGEMENT RECEIVED.
		ROUTE ABORT	0	
		MESSAGE ACKNOWLEDGED	1	INDICATES THE END OF THE MESSAGE ACKNOWLEDGEMENT.
796	001	ACKNOWLEDGEMENT DATA AMPLIFIER -----		AMPLIFIES THE TYPE OF ACKNOWLEDGEMENT REPORTED IN THE ACKNOWLEDGEMENT DATA DESIGNATOR FIELD.
		MESSAGE RECEIPTED	0	
		ERRONEOUS/MISSING BLOCK DETECTED	1	
769	056	TRACK NUMBER, JU -----		THE TN OF A JU TO WHICH A MESSAGE IS ADDRESSED.
		NO STATEMENT	0	
		NUMERIC	00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		ILLEGAL	00077 (OCTAL)	
		NUMERIC	00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC	00177 (OCTAL)	COLLECTIVE ADDRESS.
		NUMERIC	00200 THROUGH 07776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL	07777 (OCTAL)	
		NUMERIC	10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
798	001	BLOCK SIZE INDICATOR -----		INDICATES HOW THE BLOCK IS TO BE INTERPRETED.
		REED SOLOMON CODEWORD	0	INDICATES THE BLOCK IS A REED SOLOMON CODEWORD.
		TIME SLOT	1	INDICATES THE BLOCK IS A TIME SLOT.

FIELD CODING FOR J1.3I				(SHEET 2)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
799	001	SEQUENTIAL BLOCK/FIELD FLAG, 1		INDICATES THE CONDITION OF THE RECEIVED BLOCKS.

		ERRONEOUS/MISSING BLOCK	0	
		CORRECTLY RECEIVED BLOCK	1	

.....

WORD TITLE: ACKNOWLEDGEMENT EXTENSION WORD

[illegible][illegible][illegible]

WORD DESCRIPTION

WORD NUMBER: J1.3E0

WORD TITLE: ACKNOWLEDGEMENT EXTENSION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550 001		WORD FORMAT	0- 1	2	10
799 040		SEQUENTIAL BLOCK/FIELD FLAG, 40 (SBF F40)	2	1	
799 041		SEQUENTIAL BLOCK/FIELD FLAG, 41 (SBF F41)	3	1	SAME CODING AS FOR BIT 2.
799 042		SEQUENTIAL BLOCK/FIELD FLAG, 42 (SBF F42)	4	1	SAME CODING AS FOR BIT 2.
799 043		SEQUENTIAL BLOCK/FIELD FLAG, 43 (SBF F43)	5	1	SAME CODING AS FOR BIT 2.
799 044		SEQUENTIAL BLOCK/FIELD FLAG, 44 (SBF F44)	6	1	SAME CODING AS FOR BIT 2.
799 045		SEQUENTIAL BLOCK/FIELD FLAG, 45 (SBF F45)	7	1	SAME CODING AS FOR BIT 2.
799 046		SEQUENTIAL BLOCK/FIELD FLAG, 46 (SBF F46)	8	1	SAME CODING AS FOR BIT 2.
799 047		SEQUENTIAL BLOCK/FIELD FLAG, 47 (SBF F47)	9	1	SAME CODING AS FOR BIT 2.
799 048		SEQUENTIAL BLOCK/FIELD FLAG, 48 (SBF F48)	10	1	SAME CODING AS FOR BIT 2.
799 049		SEQUENTIAL BLOCK/FIELD FLAG, 49 (SBF F49)	11	1	SAME CODING AS FOR BIT 2.
799 050		SEQUENTIAL BLOCK/FIELD FLAG, 50 (SBF F50)	12	1	SAME CODING AS FOR BIT 2.
799 051		SEQUENTIAL BLOCK/FIELD FLAG, 51 (SBF F51)	13	1	SAME CODING AS FOR BIT 2.
799 052		SEQUENTIAL BLOCK/FIELD FLAG, 52 (SBF F52)	14	1	SAME CODING AS FOR BIT 2.
799 053		SEQUENTIAL BLOCK/FIELD FLAG, 53 (SBF F53)	15	1	SAME CODING AS FOR BIT 2.
799 054		SEQUENTIAL BLOCK/FIELD FLAG, 54 (SBF F54)	16	1	SAME CODING AS FOR BIT 2.
799 055		SEQUENTIAL BLOCK/FIELD FLAG, 55 (SBF F55)	17	1	SAME CODING AS FOR BIT 2.
799 056		SEQUENTIAL BLOCK/FIELD FLAG, 56 (SBF F56)	18	1	SAME CODING AS FOR BIT 2.
799 057		SEQUENTIAL BLOCK/FIELD FLAG, 57 (SBF F57)	19	1	SAME CODING AS FOR BIT 2.

WORD DESCRIPTION

WORD NUMBER: J1.3E0

WORD TITLE: ACKNOWLEDGEMENT EXTENSION WORD

REFERENCE DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
799 058	SEQUENTIAL BLOCK/FIELD FLAG, 58 (SBF F58)	20	1	SAME CODING AS FOR BIT 2.
799 059	SEQUENTIAL BLOCK/FIELD FLAG, 59 (SBF F59)	21	1	SAME CODING AS FOR BIT 2.
799 060	SEQUENTIAL BLOCK/FIELD FLAG, 60 (SBF F60)	22	1	SAME CODING AS FOR BIT 2.
799 061	SEQUENTIAL BLOCK/FIELD FLAG, 61 (SBF F61)	23	1	SAME CODING AS FOR BIT 2.
799 062	SEQUENTIAL BLOCK/FIELD FLAG, 62 (SBF F62)	24	1	SAME CODING AS FOR BIT 2.
799 063	SEQUENTIAL BLOCK/FIELD FLAG, 63 (SBF F63)	25	1	SAME CODING AS FOR BIT 2.
799 064	SEQUENTIAL BLOCK/FIELD FLAG, 64 (SBF F64)	26	1	SAME CODING AS FOR BIT 2.
799 065	SEQUENTIAL BLOCK/FIELD FLAG, 65 (SBF F65)	27	1	SAME CODING AS FOR BIT 2.
799 066	SEQUENTIAL BLOCK/FIELD FLAG, 66 (SBF F66)	28	1	SAME CODING AS FOR BIT 2.
799 067	SEQUENTIAL BLOCK/FIELD FLAG, 67 (SBF F67)	29	1	SAME CODING AS FOR BIT 2.
799 068	SEQUENTIAL BLOCK/FIELD FLAG, 68 (SBF F68)	30	1	SAME CODING AS FOR BIT 2.
799 069	SEQUENTIAL BLOCK/FIELD FLAG, 69 (SBF F69)	31	1	SAME CODING AS FOR BIT 2.
799 070	SEQUENTIAL BLOCK/FIELD FLAG, 70 (SBF F70)	32	1	SAME CODING AS FOR BIT 2.
799 071	SEQUENTIAL BLOCK/FIELD FLAG, 71 (SBF F71)	33	1	SAME CODING AS FOR BIT 2.
799 072	SEQUENTIAL BLOCK/FIELD FLAG, 72 (SBF F72)	34	1	SAME CODING AS FOR BIT 2.
799 073	SEQUENTIAL BLOCK/FIELD FLAG, 73 (SBF F73)	35	1	SAME CODING AS FOR BIT 2.
799 074	SEQUENTIAL BLOCK/FIELD FLAG, 74 (SBF F74)	36	1	SAME CODING AS FOR BIT 2.
799 075	SEQUENTIAL BLOCK/FIELD FLAG, 75 (SBF F75)	37	1	SAME CODING AS FOR BIT 2.
799 076	SEQUENTIAL BLOCK/FIELD FLAG, 76 (SBF F76)	38	1	SAME CODING AS FOR BIT 2.

WORD DESCRIPTION

WORD NUMBER: J1.3E0

WORD TITLE: ACKNOWLEDGEMENT EXTENSION WORD

REFERENCE	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
799 077	SEQUENTIAL BLOCK/FIELD FLAG, 77 (SBF F77)	39	1	SAME CODING AS FOR BIT 2.
799 078	SEQUENTIAL BLOCK/FIELD FLAG, 78 (SBF F78)	40	1	SAME CODING AS FOR BIT 2.
799 079	SEQUENTIAL BLOCK/FIELD FLAG, 79 (SBF F79)	41	1	SAME CODING AS FOR BIT 2.
799 080	SEQUENTIAL BLOCK/FIELD FLAG, 80 (SBF F80)	42	1	SAME CODING AS FOR BIT 2.
799 081	SEQUENTIAL BLOCK/FIELD FLAG, 81 (SBF F81)	43	1	SAME CODING AS FOR BIT 2.
799 082	SEQUENTIAL BLOCK/FIELD FLAG, 82 (SBF F82)	44	1	SAME CODING AS FOR BIT 2.
799 083	SEQUENTIAL BLOCK/FIELD FLAG, 83 (SBF F83)	45	1	SAME CODING AS FOR BIT 2.
799 084	SEQUENTIAL BLOCK/FIELD FLAG, 84 (SBF F84)	46	1	SAME CODING AS FOR BIT 2.
799 085	SEQUENTIAL BLOCK/FIELD FLAG, 85 (SBF F85)	47	1	SAME CODING AS FOR BIT 2.
799 086	SEQUENTIAL BLOCK/FIELD FLAG, 86 (SBF F86)	48	1	SAME CODING AS FOR BIT 2.
799 087	SEQUENTIAL BLOCK/FIELD FLAG, 87 (SBF F87)	49	1	SAME CODING AS FOR BIT 2.
799 088	SEQUENTIAL BLOCK/FIELD FLAG, 88 (SBF F88)	50	1	SAME CODING AS FOR BIT 2.
799 089	SEQUENTIAL BLOCK/FIELD FLAG, 89 (SBF F89)	51	1	SAME CODING AS FOR BIT 2.
799 090	SEQUENTIAL BLOCK/FIELD FLAG, 90 (SBF F90)	52	1	SAME CODING AS FOR BIT 2.
799 091	SEQUENTIAL BLOCK/FIELD FLAG, 91 (SBF F91)	53	1	SAME CODING AS FOR BIT 2.
799 092	SEQUENTIAL BLOCK/FIELD FLAG, 92 (SBF F92)	54	1	SAME CODING AS FOR BIT 2.
799 093	SEQUENTIAL BLOCK/FIELD FLAG, 93 (SBF F93)	55	1	SAME CODING AS FOR BIT 2.
799 094	SEQUENTIAL BLOCK/FIELD FLAG, 94 (SBF F94)	56	1	SAME CODING AS FOR BIT 2.
799 095	SEQUENTIAL BLOCK/FIELD FLAG, 95 (SBF F95)	57	1	SAME CODING AS FOR BIT 2.

WORD DESCRIPTION

WORD NUMBER: J1.3E0

WORD TITLE: ACKNOWLEDGEMENT EXTENSION WORD

REFERENCE DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
799 096	SEQUENTIAL BLOCK/FIELD FLAG, 96 (SBF F96)	58	1	SAME CODING AS FOR BIT 2.
799 097	SEQUENTIAL BLOCK/FIELD FLAG, 97 (SBF F97)	59	1	SAME CODING AS FOR BIT 2.
799 098	SEQUENTIAL BLOCK/FIELD FLAG, 98 (SBF F98)	60	1	SAME CODING AS FOR BIT 2.
799 099	SEQUENTIAL BLOCK/FIELD FLAG, 99 (SBF F99)	61	1	SAME CODING AS FOR BIT 2.
799 100	SEQUENTIAL BLOCK/FIELD FLAG, 100 (SBF 100)	62	1	SAME CODING AS FOR BIT 2.
799 101	SEQUENTIAL BLOCK/FIELD FLAG, 101 (SBF 101)	63	1	SAME CODING AS FOR BIT 2.
799 102	SEQUENTIAL BLOCK/FIELD FLAG, 102 (SBF 102)	64	1	SAME CODING AS FOR BIT 2.
799 103	SEQUENTIAL BLOCK/FIELD FLAG, 103 (SBF 103)	65	1	SAME CODING AS FOR BIT 2.
799 104	SEQUENTIAL BLOCK/FIELD FLAG, 104 (SBF 104)	66	1	SAME CODING AS FOR BIT 2.
799 105	SEQUENTIAL BLOCK/FIELD FLAG, 105 (SBF 105)	67	1	SAME CODING AS FOR BIT 2.
799 106	SEQUENTIAL BLOCK/FIELD FLAG, 106 (SBF 106)	68	1	SAME CODING AS FOR BIT 2.
799 107	SEQUENTIAL BLOCK/FIELD FLAG, 107 (SBF 107)	69	1	SAME CODING AS FOR BIT 2.

FIELD CODING FOR J1.3E0

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
799	040	SEQUENTIAL BLOCK/FIELD FLAG, 40 ----- ERRONEOUS/MISSING BLOCK 0 CORRECTLY RECEIVED BLOCK 1		INDICATES THE CONDITION OF THE RECEIVED BLOCKS.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

J1.4 MESSAGE SUMMARY

PURPOSE

The J1.4 Communicant Status message is used by JUs to report the connectivity quality of its direct communicants to other direct communicants and to the designated Net Control Station.

DATA ELEMENT SUMMARY

<u>J1.4I</u>		<u>J1.4E0 (Continued)</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	CONNECTIVITY QUALITY, INTRA-	*
LABEL, J-SERIES	5	COMMUNITY COMMUNICANT 8(2)	*
SUBLABEL, J-SERIES	3	CONNECTIVITY QUALITY, INTRA-	*
MESSAGE LENGTH INDICATOR	3	COMMUNITY COMMUNICANT 9(2)	*
MESSAGE RECEIVED INDICATOR	1	CONNECTIVITY QUALITY, INTRA-	*
NET CONTROL MESSAGE SEQUENCE	1	COMMUNITY COMMUNICANT 10(2)	*
NUMBER		CONNECTIVITY QUALITY, INTRA-	*
RECEIPT/COMPLIANCE	5	COMMUNITY COMMUNICANT 11(2)	*
COMMUNITY DESIGNATOR	4	CONNECTIVITY QUALITY, INTRA-	*
RELAY LEVEL, OWN NET CONTROL	4	COMMUNITY COMMUNICANT 12(2)	*
STATION		CONNECTIVITY QUALITY, INTRA-	*
OWN NET CONTROL STATION STATUS	2	COMMUNITY COMMUNICANT 13(2)	*
TIME SLOT OFFSET, CONTROL NET	7	CONNECTIVITY QUALITY, INTRA-	*
ENTRY		COMMUNITY COMMUNICANT 14(2)	*
NET NUMBER, CONTROL NET ENTRY	7	CONNECTIVITY QUALITY, INTRA-	*
CONNECTIVITY QUALITY,	2	COMMUNITY COMMUNICANT 15(2)	*
INTERCOMMUNITY COMMUNICANT		CONNECTIVITY QUALITY, INTRA-	*
TRACK NUMBER, INTERCOMMUNITY	15	COMMUNITY COMMUNICANT 16(2)	*
COMMUNICANT		CONNECTIVITY QUALITY, INTRA-	*
COMMUNITY DESIGNATOR,	4	COMMUNITY COMMUNICANT 17(2)	*
INTERCOMMUNITY COMMUNICANT		CONNECTIVITY QUALITY, INTRA-	*
RELAY LEVEL, INTERCOMMUNITY	4	COMMUNITY COMMUNICANT 18(2)	*
COMMUNICANT		CONNECTIVITY QUALITY, INTRA-	*
SPARE	1	COMMUNITY COMMUNICANT 19(2)	*
		CONNECTIVITY QUALITY, INTRA-	*
		COMMUNITY COMMUNICANT 20(2)	*
		CONNECTIVITY QUALITY, INTRA-	*
		COMMUNITY COMMUNICANT 21(2)	*
		CONNECTIVITY QUALITY, INTRA-	*
		COMMUNITY COMMUNICANT 22(2)	*
		CONNECTIVITY QUALITY, INTRA-	*
		COMMUNITY COMMUNICANT 23(2)	*
		CONNECTIVITY QUALITY, INTRA-	*
		COMMUNITY COMMUNICANT 24(2)	*
		CONNECTIVITY QUALITY, INTRA-	*
		COMMUNITY COMMUNICANT 25(2)	*
		CONNECTIVITY QUALITY, INTRA-	*
		COMMUNITY COMMUNICANT 26(2)	*
		CONNECTIVITY QUALITY, INTRA-	*
		COMMUNITY COMMUNICANT 27(2)	*
		CONNECTIVITY QUALITY, INTRA-	*
		COMMUNITY COMMUNICANT 28(2)	*

J1.4E0 (Continued)

J1.4E0 (Continued)5.1-227

J1.4 MESSAGE SUMMARY (Continued)

DATA ELEMENT SUMMARY (Continued)

<u>J1.4E0 (Continued)</u>	
<u>DATA ELEMENT</u>	<u># BITS</u>
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 125(2)*	*
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 126(2)*	*
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 127(2)*	*
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 128(2)*	64
SPARE	2

MIL-STD-6016B

J1.4 TRANSMIT/RECEIVE RULES

TITLE: Communicant Status Message

TRANSMIT RULES

1. The J1.4 Communicant Status message shall be transmitted periodically with a RRN = 6 (12 seconds, 8-20 second interval) as follows:

a. In a J1.4I/J1.4E0/J1.4E0 word sequence in a JU's Net Status Needline PG time slot when the Communicant Status Update Indicator field is set to zero in the J1.5 Net Control Initialization message.

b. The Connectivity Quality, Intracommunity Communicant field selected by the terminal for reporting a particular Net Status Needline PG time slot shall be indexed by its ordinal position (modulo 64 or modulo 128) relative to the current epoch. The Report Format Indicator field in the J1.4E0 word shall indicate which 32 slots are being reported on.

c. When a terminal receives a J1.4 message from a terminal not under the control of the terminal's NCS, the terminal shall report the Intercommunity Communicant's TN, Connectivity Quality, Community Designator and Relay Level in the appropriate fields of its J1.4 message.

2. A JU under control of an NCS shall transmit in every J1.4 message the Receipt/Compliance and Net Control Message Sequence Number values of the last net control message received from the controlling NCS. Each time a new net control message is received, the JU will change the value of the Net Control Message Sequence Number field and report the new Receipt/Compliance value in the J1.4 message.

RECEIVE RULES

There are no receive rules specified for this message.

.....

WORD TITLE: COMMUNICANT STATUS INITIAL WORD

24:	23	22	21	20:	19	18	17	16	15:	14:	13:	12	11	10:	09	08	07:	06	05	04	03	02:	01	00:		
<---	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
	:	COMMUNITY			:	RECEIPT/COMPLIANCE			:	NC	:	MRI	:	MESSAGE	:	SUBLABEL,			:	LABEL, J-SERIES			:	WORD	:	
	:	DESIGNATOR			:				:	MSN	:		:	LENGTH	:	J-SERIES			:				:	FORMAT	:	
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	4			:	5			:	1	:	1	:	3	:	3			:	5			:	2		:

49	48	47	46:	45	44:	43	42	41	40	39	38	37:	36	35	34	33	32	31	30:	29	28:	27	26	25	

<---			:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
			:	CQ, IC	:	NET NUMBER, CONTROL NET					:	TIME SLOT OFFSET, CONTROL					:	NCS STS		:	RELAY		:	LEVEL, OWN	
			:	:	:	ENTRY					:	NET ENTRY					:			:	NET CONTROL		:		
			:	:	:						:						:			:	STATION		:		

			:	2	:	7					:	7					:	2		:	4		:		

:	69:	68	67	66	65:	64	63	62	61:	60	59	58	57	56	55	54	53	52	51	50		
:	:	RELAY LEVEL,				:					:	TRACK NUMBER, INTERCOMMUNITY COMMUNICANT										
:	SP	:	INTERCOMMUNITY				:	CD IC				:										
:	:	COMMUNICANT				:					:											
:	1	:	4				:	4				:	15									

WORD DESCRIPTION

WORD NUMBER: J1.4I

WORD TITLE: COMMICANT STATUS INITIAL WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	00
270	004	LABEL, J-SERIES	2-	6 5	00001
271	005	SUBLABEL, J-SERIES	7-	9 3	100
800	001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
1541	001	MESSAGE RECEIVED INDICATOR (MRI)	13	1	
1542	001	NET CONTROL MESSAGE SEQUENCE NUMBER (NC MSN)	14	1	
392	008	RECEIPT/COMPLIANCE	15-	19 5	
1774	001	COMMUNITY DESIGNATOR	20-	23 4	
1775	002	RELAY LEVEL, OWN NET CONTROL STATION (RLO NCS)	24-	27 4	
1786	001	OWN NET CONTROL STATION STATUS (NCS STS)	28-	29 2	
348	019	TIME SLOT OFFSET, CONTROL NET ENTRY	30-	36 7	
348	020	NET NUMBER, CONTROL NET ENTRY	37-	43 7	
1725	012	CONNECTIVITY QUALITY, INTERCOMMUNITY COMMICANT (CQ, IC)	44-	45 2	
769	015	TRACK NUMBER, INTERCOMMUNITY COMMICANT	46-	60 15	
1774	002	COMMUNITY DESIGNATOR, INTERCOMMUNITY COMMICANT (CD IC)	61-	64 4	
1775	003	RELAY LEVEL, INTERCOMMUNITY COMMICANT (RL ICC)	65-	68 4	
756	001	SPARE (SP)	69	1	

FIELD CODING FOR J1.4I

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1541	001	MESSAGE RECEIVED INDICATOR -----		INDICATES WHETHER OR NOT A MESSAGE WAS RECEIVED FROM THE CONTROLLING NCS SINCE THE LAST REPORT (J1.4). NO MESSAGE RECEIVED OR MESSAGE RECEIVED BUT UNINTELLIGIBLE.
		NO MESSAGE RECEIVED	0	
		MESSAGE CORRECTLY RECEIVED	1	
1542	001	NET CONTROL MESSAGE SEQUENCE NUMBER -----		THE VALUE IN THIS FIELD ALTERNATES AS COMMANDS ARRIVE. THIS COULD BE INTERPRETED AS THE PARITY OF THE COMMAND NUMBER (I.E. ON THE FIRST, THIRD, FIFTH, ETC. COMMANDS THIS FIELD WOULD BE SET TO 1, ON THE SECOND, FOURTH, SIXTH, ETC. IT WOULD BE SET TO 0).
		PARITY NUMBER	0 THROUGH 1	
392	008	RECEIPT/COMPLIANCE -----		RECEIPT/COMPLIANCE RESPONSE REQUIRED.
		ORIGINAL ORDER	0	RECEIPT/COMPLIANCE RESPONSE NOT REQUIRED. MUST BE USED IN CONJUNCTION WITH ORIGINAL ORDER MESSAGES ADDRESSED TO COLLECTIVE ADDRESSES. THE ORIGINAL ORDER SHALL BE TRANSMITTED 3 TIMES.
		ORIGINAL ORDER	1	MESSAGE RECEIVED ERROR FREE.
		MACHINE RECEIPT	2	THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER WILL COMPLY. IN THIS USAGE, THE SYSTEM COMPONENT IS A HUMAN OPERATOR OR (UNMANNED VEHICLE ONLY) A MACHINE.
		WILCO (WILL COMPLY)	3	THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER HAS COMPLIED. IN THIS USAGE, THE SYSTEM COMPONENT MAY BE A HUMAN OPERATOR OR A MACHINE.
		HAVCO (HAVE COMPLIED)	4	RECEIPT/COMPLIANCE RESPONSE (MR AND/ OR CANTPRO ONLY) REQUIRED.
		ORIGINAL ORDER	5	THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER CANNOT COMPLY. IN THIS USAGE, THE SYSTEM COMPONENT IS A HUMAN
		CANTCO (CANNOT COMPLY)	6	

FIELD CODING FOR J1.4I				(SHEET 2)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
		CANTPRO (CANNOT PROCESS)	7	OPERATOR OR (UNMANNED VEHICLE ONLY) A MACHINE.
		CANTPRO (CANNOT PROCESS)	8	NON-SPECIFIC SYSTEM LIMITATION OR CONFLICT. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	9	TIME SLOT ASSIGNMENT CONFLICT DETECTED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	10	CRYPTOVARIABLE NOT HELD. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	11	PARTICIPATION GROUP NOT DEFINED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	12	APPLICABLE ASSIGNMENT TABLE FULL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
				RELAY FUNCTION SPECIFIED ALREADY HAS ASSIGNED TIME SLOT BLOCKS FOR WHICH A DIFFERENT RELAY MODE/NET NUMBER HAS BEEN SPECIFIED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN

FIELD CODING FOR J1.4I				(SHEET 3)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
		CANTPRO (CANNOT PROCESS)	13	RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED. INTERFERENCE PROTECTION FEATURES WOULD BE VIOLATED BY ACCEPTANCE OF ASSIGNMENT. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	14	HOST SUBSCRIBER INTERFACE IS INACTIVE AND MESSAGE IS NOT PROCESSED BY THE TERMINAL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	15	TN, ADDRESSEE DOES NOT IMPLEMENT THE ACTION REQUESTED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	16	ONE OR MORE TNS IN THE OM NOT HELD. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	17	TN, REFERENCE OR TN, FRIENDLY WEAPON IS UNDER OWN UNIT CONTROL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	18	UNIT NOT EXERCISING AIR CONTROL CAPABILITY. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE

FIELD CODING FOR J1.4I

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
		CANTPRO (CANNOT PROCESS)	19	THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	20	UNACCEPTABLE IDENTITY. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	21	ADDRESSEE TN IS INACTIVE. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	22	THE FORWARDING UNIT DID NOT RECEIVE A MACHINE RECEIPT FROM THE ADDRESSEE TN. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		UNDEFINED NO STATEMENT	23 THROUGH 30 31	TN, REFERENCE OR TN, FRIENDLY WEAPON IS NOT UNDER THIS UNIT'S CONTROL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
1774	001	COMMUNITY DESIGNATOR -----		A NUMERICAL VALUE USED TO IDENTIFY A GROUP OF JUS AS ASSOCIATED WITH A PARTICULAR ARMY DIVISION WHEN PARTICIPATING IN THE ARMY CENTRALIZED NET MANAGEMENT.
		NO STATEMENT COMMUNITY DESIGNATOR	0 1 THROUGH 15	

FIELD CODING FOR J1.4I

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1775	002	RELAY LEVEL, OWN NET CONTROL STATION ----- NO STATEMENT 1 THROUGH 7 RELAY HOPS UNDEFINED	0 1 THROUGH 7 8 THROUGH 15	INDICATES THE DISTANCE IN RELAY HOPS FROM THE TERMINAL TO ITS NET CONTROL STATION ON THE NET STATUS NEEDLINE PARTICIPATION GROUP PATH.
1786	001	OWN NET CONTROL STATION STATUS ----- NO STATEMENT MESSAGES RECEIVED NO MESSAGES RECEIVED UNDEFINED	0 1 2 3	INDICATES THE OPERATIONAL STATUS OF A TERMINAL'S NET CONTROL STATION. THE TERMINAL HAS RECEIVED MESSAGES FROM ITS CONTROLLING NET CONTROL STATION WITHIN THE LAST TWO (1-5, 1) MINUTES. THE TERMINAL HAS NOT RECEIVED MESSAGES FROM ITS CONTROLLING NET CONTROL STATION WITHIN THE LAST TWO (1-5, 1) MINUTES.
348	019	TIME SLOT OFFSET, CONTROL NET ENTRY ----- ILLEGAL NUMERIC	0 THROUGH 16 17 THROUGH 127	INDICATES THE NUMBER OF TIME SLOTS BETWEEN THE NET STATUS PG TIME SLOTS AND THE CONTROL NET ENTRY TIME SLOT OF THE TERMINAL. THE CONTROL NET ENTRY TIME SLOT IS DE- FINED AS A POSITIVE OFFSET FROM THE SLOT IN WHICH THE MESSAGE WAS RECEIVED.
348	020	NET NUMBER, CONTROL NET ENTRY ----- NUMERIC NO STATEMENT	0 THROUGH 126 127	INDICATES THE NET NUMBER OF THE TER- MINALS CONTROL NET ENTRY RECEIVE SLOT.
1725	012	CONNECTIVITY QUALITY, INTERCOMMUNITY COMMUNICANT ----- NO MESSAGE RECEIVED FROM ASSOCIATED SOURCE OR ERASURE COUNT EXCEEDS 12(8-57,1) ERASURES	0	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.

		FIELD CODING FOR J1.4I		(SHEET 6)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1725	012	CONNECTIVITY QUALITY, INTERCOMMUNITY COMMUNICANT ----- LESS THAN OR EQUAL TO 12(8-57,1) ERASURES LESS THAN OR EQUAL TO 8(4-48,1) ERASURES LESS THAN OR EQUAL TO 4(1-32,1) ERASURES	(CONTINUED) 1 2 3	
769	015	TRACK NUMBER, INTERCOMMUNITY COMMUNICANT ----- NO STATEMENT NUMERIC ILLEGAL NUMERIC NUMERIC NUMERIC NUMERIC ILLEGAL NUMERIC NUMERIC	0 00001 THROUGH 00076 (OCTAL) 00077 (OCTAL) 00100 THROUGH 00175 (OCTAL) 00176 (OCTAL) 00177 (OCTAL) 00200 THROUGH 07776 (OCTAL) 07777 (OCTAL) 10000 THROUGH 77776 (OCTAL) 77777 (OCTAL)	THE TN OF THE INTERCOMMUNITY COMMUNICANT BEING REPORTED IN THE MESSAGE. ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU). ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU). RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS. COLLECTIVE ADDRESS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS. ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
1774	002	COMMUNITY DESIGNATOR, INTERCOMMUNITY COMMUNICANT ----- NO STATEMENT COMMUNITY DESIGNATOR	0 1 THROUGH 15	A NUMERICAL VALUE USED TO IDENTIFY AN INTERCOMMUNITY COMMUNICANT AS ASSOCIATED WITH A PARTICULAR ARMY DIVISION WHEN PARTICIPATING IN THE ARMY CENTRALIZED NET MANAGEMENT.

FIELD CODING FOR J1.4I					(SHEET 7)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION	
1775	003	RELAY LEVEL, INTERCOMMUNITY COMMUNICANT -----		INDICATES THE DISTANCE IN RELAY HOPS FROM AN INTERCOMMUNITY COMMUNICANT TO ITS NET CONTROL STATION ON THE NET STATUS NEEDLINE PG PATH.	
		NO STATEMENT	0		
		1 THROUGH 7 RELAY HOPS	1 THROUGH 7		
		UNDEFINED	8 THROUGH 15		

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: COMMUNICANT STATUS EXTENSION WORD

[illegible]

WORD MAP

WORD NUMBER: J1.4E0

WORD TITLE: COMMICANT STATUS EXTENSION WORD

	: 69	68:	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50
:			:CQ, 32	:CQ, 31	:CQ, 30	:CQ, 29	:CQ, 28	:CQ, 27	:CQ, 26	:CQ, 25	:CQ, 24	:								
:			:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
:			:CQ, 64	:CQ, 63	:CQ, 62	:CQ, 61	:CQ, 60	:CQ, 59	:CQ, 58	:CQ, 57	:CQ, 56	:								
:			:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
:	SP		:CQ, 96	:CQ, 95	:CQ, 94	:CQ, 93	:CQ, 92	:CQ, 91	:CQ, 90	:CQ, 89	:CQ, 88	:								
:			:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
:			:CQ, 128	:CQ, 127	:CQ, 126	:CQ, 125	:CQ, 124	:CQ, 123	:CQ, 122	:CQ, 121	:CQ, 120	:								
:			:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
:	2	:																		

WORD DESCRIPTION

WORD NUMBER: J1.4E0

WORD TITLE: COMMICANT STATUS EXTENSION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550 001		WORD FORMAT	0-	1 2	10
1543 001		REPORT FORMAT INDICATOR (RFI)	2-	3 2	
1725 013		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 1 (CQ, 1)	4-	5 2	TRANSMITTED IN THE FIRST J1.4E0 WORD IN THE J1.4 MESSAGE.
1725 014		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 2 (CQ, 2)	6-	7 2	TRANSMITTED IN THE FIRST J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 015		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 3 (CQ, 3)	8-	9 2	TRANSMITTED IN THE FIRST J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 016		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 4 (CQ, 4)	10-	11 2	TRANSMITTED IN THE FIRST J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 017		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 5 (CQ, 5)	12-	13 2	TRANSMITTED IN THE FIRST J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 018		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 6 (CQ, 6)	14-	15 2	TRANSMITTED IN THE FIRST J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 019		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 7 (CQ, 7)	16-	17 2	TRANSMITTED IN THE FIRST J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 020		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 8 (CQ, 8)	18-	19 2	TRANSMITTED IN THE FIRST J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 021		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 9 (CQ, 9)	20-	21 2	TRANSMITTED IN THE FIRST J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 022		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 10 (CQ, 10)	22-	23 2	TRANSMITTED IN THE FIRST J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 023		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 11 (CQ, 11)	24-	25 2	TRANSMITTED IN THE FIRST J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 024		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 12 (CQ, 12)	26-	27 2	TRANSMITTED IN THE FIRST J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.

WORD DESCRIPTION

WORD NUMBER: J1.4E0

WORD TITLE: COMMUNICANT STATUS EXTENSION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1725 025		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 13 (CQ, 13)	28- 29	2	TRANSMITTED IN THE FIRST J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 026		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 14 (CQ, 14)	30- 31	2	TRANSMITTED IN THE FIRST J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 027		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 15 (CQ, 15)	32- 33	2	TRANSMITTED IN THE FIRST J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 028		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 16 (CQ, 16)	34- 35	2	TRANSMITTED IN THE FIRST J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 029		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 17 (CQ, 17)	36- 37	2	TRANSMITTED IN THE FIRST J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 030		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 18 (CQ, 18)	38- 39	2	TRANSMITTED IN THE FIRST J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 031		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 19 (CQ, 19)	40- 41	2	TRANSMITTED IN THE FIRST J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 032		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 20 (CQ, 20)	42- 43	2	TRANSMITTED IN THE FIRST J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 033		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 21 (CQ, 21)	44- 45	2	TRANSMITTED IN THE FIRST J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 034		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 22 (CQ, 22)	46- 47	2	TRANSMITTED IN THE FIRST J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 035		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 23 (CQ, 23)	48- 49	2	TRANSMITTED IN THE FIRST J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 036		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 24 (CQ, 24)	50- 51	2	TRANSMITTED IN THE FIRST J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.

WORD DESCRIPTION

WORD NUMBER: J1.4E0

WORD TITLE: COMMUNICANT STATUS EXTENSION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1725 037		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 25 (CQ, 25)	52- 53	2	TRANSMITTED IN THE FIRST J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 038		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 26 (CQ, 26)	54- 55	2	TRANSMITTED IN THE FIRST J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 039		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 27 (CQ, 27)	56- 57	2	TRANSMITTED IN THE FIRST J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 040		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 28 (CQ, 28)	58- 59	2	TRANSMITTED IN THE FIRST J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 041		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 29 (CQ, 29)	60- 61	2	TRANSMITTED IN THE FIRST J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 042		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 30 (CQ, 30)	62- 63	2	TRANSMITTED IN THE FIRST J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 043		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 31 (CQ, 31)	64- 65	2	TRANSMITTED IN THE FIRST J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 044		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 32 (CQ, 32)	66- 67	2	TRANSMITTED IN THE FIRST J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 045		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 33 (CQ, 33)	4- 5	2	TRANSMITTED IN THE FIRST REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 046		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 34 (CQ, 34)	6- 7	2	TRANSMITTED IN THE FIRST REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 047		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 35 (CQ, 35)	8- 9	2	TRANSMITTED IN THE FIRST REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.

WORD DESCRIPTION

WORD NUMBER: J1.4E0

WORD TITLE: COMMICANT STATUS EXTENSION WORD

REFERENCE DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1725 048	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 36 (CQ, 36)	10- 11	2	TRANSMITTED IN THE FIRST REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 049	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 37 (CQ, 37)	12- 13	2	TRANSMITTED IN THE FIRST REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 050	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 38 (CQ, 38)	14- 15	2	TRANSMITTED IN THE FIRST REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 051	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 39 (CQ, 39)	16- 17	2	TRANSMITTED IN THE FIRST REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 052	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 40 (CQ, 40)	18- 19	2	TRANSMITTED IN THE FIRST REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 053	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 41 (CQ, 41)	20- 21	2	TRANSMITTED IN THE FIRST REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 054	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 42 (CQ, 42)	22- 23	2	TRANSMITTED IN THE FIRST REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 055	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 43 (CQ, 43)	24- 25	2	TRANSMITTED IN THE FIRST REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 056	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 44 (CQ, 44)	26- 27	2	TRANSMITTED IN THE FIRST REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.

WORD DESCRIPTION

WORD NUMBER: J1.4E0

WORD TITLE: COMMICANT STATUS EXTENSION WORD

REFERENCE DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1725 057	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 45 (CQ, 45)	28- 29	2	TRANSMITTED IN THE FIRST REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 058	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 46 (CQ, 46)	30- 31	2	TRANSMITTED IN THE FIRST REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 059	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 47 (CQ, 47)	32- 33	2	TRANSMITTED IN THE FIRST REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 060	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 48 (CQ, 48)	34- 35	2	TRANSMITTED IN THE FIRST REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 061	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 49 (CQ, 49)	36- 37	2	TRANSMITTED IN THE FIRST REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 062	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 50 (CQ, 50)	38- 39	2	TRANSMITTED IN THE FIRST REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 063	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 51 (CQ, 51)	40- 41	2	TRANSMITTED IN THE FIRST REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 064	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 52 (CQ, 52)	42- 43	2	TRANSMITTED IN THE FIRST REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 065	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 53 (CQ, 53)	44- 45	2	TRANSMITTED IN THE FIRST REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.

WORD DESCRIPTION

WORD NUMBER: J1.4E0

WORD TITLE: COMMICANT STATUS EXTENSION WORD

REFERENCE DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1725 066	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 54 (CQ, 54)	46- 47	2	TRANSMITTED IN THE FIRST REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 067	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 55 (CQ, 55)	48- 49	2	TRANSMITTED IN THE FIRST REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 068	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 56 (CQ, 56)	50- 51	2	TRANSMITTED IN THE FIRST REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 069	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 57 (CQ, 57)	52- 53	2	TRANSMITTED IN THE FIRST REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 070	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 58 (CQ, 58)	54- 55	2	TRANSMITTED IN THE FIRST REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 071	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 59 (CQ, 59)	56- 57	2	TRANSMITTED IN THE FIRST REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 072	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 60 (CQ, 60)	58- 59	2	TRANSMITTED IN THE FIRST REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 073	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 61 (CQ, 61)	60- 61	2	TRANSMITTED IN THE FIRST REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 074	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 62 (CQ, 62)	62- 63	2	TRANSMITTED IN THE FIRST REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.

WORD DESCRIPTION

WORD NUMBER: J1.4E0

WORD TITLE: COMMICANT STATUS EXTENSION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1725 075		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 63 (CQ, 63)	64- 65	2	TRANSMITTED IN THE FIRST REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 076		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 64 (CQ, 64)	66- 67	2	TRANSMITTED IN THE FIRST REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 077		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 65 (CQ, 65)	4- 5	2	TRANSMITTED IN THE SECOND REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 078		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 66 (CQ, 66)	6- 7	2	TRANSMITTED IN THE SECOND REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 079		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 67 (CQ, 67)	8- 9	2	TRANSMITTED IN THE SECOND REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 080		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 68 (CQ, 68)	10- 11	2	TRANSMITTED IN THE SECOND REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 081		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 69 (CQ, 69)	12- 13	2	TRANSMITTED IN THE SECOND REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 082		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 70 (CQ, 70)	14- 15	2	TRANSMITTED IN THE SECOND REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 083		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 71 (CQ, 71)	16- 17	2	TRANSMITTED IN THE SECOND REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.

WORD DESCRIPTION

WORD NUMBER: J1.4E0

WORD TITLE: COMMICANT STATUS EXTENSION WORD

REFERENCE DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1725 084	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 72 (CQ, 72)	18- 19	2	TRANSMITTED IN THE SECOND REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 085	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 73 (CQ, 73)	20- 21	2	TRANSMITTED IN THE SECOND REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 086	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 74 (CQ, 74)	22- 23	2	TRANSMITTED IN THE SECOND REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 087	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 75 (CQ, 75)	24- 25	2	TRANSMITTED IN THE SECOND REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 088	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 76 (CQ, 76)	26- 27	2	TRANSMITTED IN THE SECOND REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 089	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 77 (CQ, 77)	28- 29	2	TRANSMITTED IN THE SECOND REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 090	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 78 (CQ, 78)	30- 31	2	TRANSMITTED IN THE SECOND REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 091	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 79 (CQ, 79)	32- 33	2	TRANSMITTED IN THE SECOND REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 092	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 80 (CQ, 80)	34- 35	2	TRANSMITTED IN THE SECOND REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.

WORD DESCRIPTION

WORD NUMBER: J1.4E0

WORD TITLE: COMMICANT STATUS EXTENSION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1725 093		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 81 (CQ, 81)	36- 37	2	TRANSMITTED IN THE SECOND REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 094		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 82 (CQ, 82)	38- 39	2	TRANSMITTED IN THE SECOND REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 095		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 83 (CQ, 83)	40- 41	2	TRANSMITTED IN THE SECOND REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 096		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 84 (CQ, 84)	42- 43	2	TRANSMITTED IN THE SECOND REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 097		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 85 (CQ, 85)	44- 45	2	TRANSMITTED IN THE SECOND REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 098		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 86 (CQ, 86)	46- 47	2	TRANSMITTED IN THE SECOND REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 099		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 87 (CQ, 87)	48- 49	2	TRANSMITTED IN THE SECOND REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 100		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 88 (CQ, 88)	50- 51	2	TRANSMITTED IN THE SECOND REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 101		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 89 (CQ, 89)	52- 53	2	TRANSMITTED IN THE SECOND REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.

WORD DESCRIPTION

WORD NUMBER: J1.4E0

WORD TITLE: COMMICANT STATUS EXTENSION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1725 102		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 90 (CQ, 90)	54-	55 2	TRANSMITTED IN THE SECOND REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 103		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 91 (CQ, 91)	56-	57 2	TRANSMITTED IN THE SECOND REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 104		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 92 (CQ, 92)	58-	59 2	TRANSMITTED IN THE SECOND REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 105		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 93 (CQ, 93)	60-	61 2	TRANSMITTED IN THE SECOND REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 106		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 94 (CQ, 94)	62-	63 2	TRANSMITTED IN THE SECOND REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 107		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 95 (CQ, 95)	64-	65 2	TRANSMITTED IN THE SECOND REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 108		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 96 (CQ, 96)	66-	67 2	TRANSMITTED IN THE SECOND REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 109		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 97 (CQ, 97)	4-	5 2	TRANSMITTED IN THE THIRD REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 110		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 98 (CQ, 98)	6-	7 2	TRANSMITTED IN THE THIRD REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.

WORD DESCRIPTION

WORD NUMBER: J1.4E0

WORD TITLE: COMMICANT STATUS EXTENSION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1725	111	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 99 (CQ, 99)	8-	9 2	TRANSMITTED IN THE THIRD REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725	112	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 100 (CQ, 100)	10-	11 2	TRANSMITTED IN THE THIRD REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725	113	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 101 (CQ, 101)	12-	13 2	TRANSMITTED IN THE THIRD REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725	114	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 102 (CQ, 102)	14-	15 2	TRANSMITTED IN THE THIRD REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725	115	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 103 (CQ, 103)	16-	17 2	TRANSMITTED IN THE THIRD REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725	116	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 104 (CQ, 104)	18-	19 2	TRANSMITTED IN THE THIRD REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725	117	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 105 (CQ, 105)	20-	21 2	TRANSMITTED IN THE THIRD REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725	118	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 106 (CQ, 106)	22-	23 2	TRANSMITTED IN THE THIRD REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725	119	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 107 (CQ, 107)	24-	25 2	TRANSMITTED IN THE THIRD REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.

WORD DESCRIPTION

WORD NUMBER: J1.4E0

WORD TITLE: COMMICANT STATUS EXTENSION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1725	120	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 108 (CQ, 108)	26-	27 2	TRANSMITTED IN THE THIRD REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725	121	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 109 (CQ, 109)	28-	29 2	TRANSMITTED IN THE THIRD REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725	122	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 110 (CQ, 110)	30-	31 2	TRANSMITTED IN THE THIRD REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725	123	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 111 (CQ, 111)	32-	33 2	TRANSMITTED IN THE THIRD REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725	124	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 112 (CQ, 112)	34-	35 2	TRANSMITTED IN THE THIRD REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725	125	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 113 (CQ, 113)	36-	37 2	TRANSMITTED IN THE THIRD REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725	126	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 114 (CQ, 114)	38-	39 2	TRANSMITTED IN THE THIRD REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725	127	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 115 (CQ, 115)	40-	41 2	TRANSMITTED IN THE THIRD REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725	128	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 116 (CQ, 116)	42-	43 2	TRANSMITTED IN THE THIRD REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.

WORD DESCRIPTION

WORD NUMBER: J1.4E0

WORD TITLE: COMMICANT STATUS EXTENSION WORD

REFERENCE DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1725 129	CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMICANT 117 (CQ, 117)	44-	45 2	TRANSMITTED IN THE THIRD REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 130	CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMICANT 118 (CQ, 118)	46-	47 2	TRANSMITTED IN THE THIRD REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 131	CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMICANT 119 (CQ, 119)	48-	49 2	TRANSMITTED IN THE THIRD REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 132	CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMICANT 120 (CQ, 120)	50-	51 2	TRANSMITTED IN THE THIRD REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 133	CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMICANT 121 (CQ, 121)	52-	53 2	TRANSMITTED IN THE THIRD REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 134	CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMICANT 122 (CQ, 122)	54-	55 2	TRANSMITTED IN THE THIRD REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 135	CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMICANT 123 (CQ, 123)	56-	57 2	TRANSMITTED IN THE THIRD REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 136	CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMICANT 124 (CQ, 124)	58-	59 2	TRANSMITTED IN THE THIRD REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 137	CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMICANT 125 (CQ, 125)	60-	61 2	TRANSMITTED IN THE THIRD REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.

WORD DESCRIPTION

WORD NUMBER: J1.4E0
WORD TITLE: COMMICANT STATUS EXTENSION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1725 138		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 126 (CQ, 126)	62-	63 2	TRANSMITTED IN THE THIRD REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 139		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 127 (CQ, 127)	64-	65 2	TRANSMITTED IN THE THIRD REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
1725 140		CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMICANT 128 (CQ, 128)	66-	67 2	TRANSMITTED IN THE THIRD REPETITION OF THE J1.4E0 WORD IN THE J1.4 MESSAGE. SAME CODING AS FOR BITS 4 AND 5.
756 002		SPARE (SP)	68-	69 2	

FIELD CODING FOR J1.4E0 (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1543	001	REPORT FORMAT INDICATOR -----		INDICATES WORD REPORTS ON THE STATUS OF THE FIRST, SECOND, THIRD, AND FOURTH 32 COMMUNICANTS.
		FIRST 32 COMMUNICANTS	0	
		SECOND 32 COMMUNICANTS	1	
		THIRD 32 COMMUNICANTS	2	
		FOURTH 32 COMMUNICANTS	3	
1725	013	CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 1 -----		A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.
		NO MESSAGE RECEIVED FROM ASSOCIATED SOURCE OR ERASURE COUNT EXCEEDS 12(8-57,1) ERASURES	0	
		LESS THAN OR EQUAL TO 12(8-57,1) ERASURES	1	
		LESS THAN OR EQUAL TO 8(4-48,1) ERASURES	2	
		LESS THAN OR EQUAL TO 4(1-32,1) ERASURES	3	

MIL-STD-6016B

J1.5 MESSAGE SUMMARY

PURPOSE

The J1.5 Net Control Initialization message is used to provide a number of initial terminal parameters required to allow a terminal to actively participate in an established net under the control of a dynamic net manager.

DATA ELEMENT SUMMARY

<u>J1.5I</u>		<u>J1.5C1</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	WORD FORMAT	2
LABEL, J-SERIES	5	CONTINUATION WORD LABEL	5
SUBLABEL, J-SERIES	3	ADD/DELETE INDICATOR	1
MESSAGE LENGTH INDICATOR	3	TRACK NUMBER, SECONDARY 1	15
TRACK NUMBER, ADDRESSEE	15	TRACK NUMBER, SECONDARY 2	15
NET NUMBER, DEFAULT	7	TRACK NUMBER, SECONDARY 3	15
REPROMULGATION RELAY STATE	1	TRACK NUMBER, SECONDARY 4	15
REPROMULGATION COUNTER	4	SPARE	2
CONNECTIVITY MONITOR, ENABLE	1		
COMMUNITY DESIGNATOR	4		
REPROMULGATION ORIGINATION CONTROL	1		
INITIAL ENTRY INDICATOR	1		
TIMEOUT INTERVAL	5		
SPARE	9		
RECEIPT/COMPLIANCE	5		
RECURRENCE RATE, RECEIPT/COMPLIANCE	4		
<u>J1.5E0</u>			
DATA ELEMENT	# BITS		
WORD FORMAT	2		
SPARE	7		
RECURRENCE RATE, NET STATUS PARTICIPATION GROUP	4		
TIME SLOT SET, NET STATUS PARTICIPATION GROUP	2		
TIME SLOT NUMBER, NET STATUS PARTICIPATION GROUP	15		
NET NUMBER, NET STATUS PARTICIPATION GROUP	7		
OVERALL RECURRENCE RATE, NET STATUS PARTICIPATION GROUP	4		
RELAY LEVEL, OWN NET CONTROL STATION	4		
COMMUNICANT STATUS UPDATE INDICATOR	2		
TIME SLOT OFFSET, CONTROL NET ENTRY	7		
NET NUMBER, CONTROL NET ENTRY	7		
PARTICIPANT INDEX NUMBER	8		
SPARE	1		

MIL-STD-6016B

J1.5 TRANSMIT/RECEIVE RULES

TITLE: Net Control Initialization Message

TRANSMIT RULES

1. The J1.5 Net Control Initialization message shall be transmitted only by designated NCSs once as follows:

a. To any JU from which a net control entry request has been received that is recognized by the NCS as a potential subscriber.

b. To change existing terminal parameters of a JU participating in the net.

c. In response to a J0.6 Communications Control message.

2. When the J1.5 message is transmitted on a relay needline PG to a JU not already a net participant, the transmission from the last relay to the JU requesting net entry shall be on the net number in the Net Number, Default field.

RECEIVE RULES

1. Upon receipt of a J1.5 message from its controlling NCS the terminal will modify its parameters as specified in the message, using default or no statement values in fields where applicable.

2. Upon receipt of a J1.5 message from an NCS other than a controlling NCS the terminal will consider itself reinitialized and will comply with all parameter changes specified.

3. A terminal will only comply with a J1.5 message addressed to it.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J1.5I

WORD TITLE: NET CONTROL INITIALIZATION INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00					
TRACK NUMBER, ADDRESSEE												:	MESSAGE	:	SUBLABEL,	:							:	WORD	:				
												:	LENGTH	:	J-SERIES	:	LABEL, J-SERIES						:	FORMAT	:				
												:	INDICATOR	:							:							:	
15												:	3	:	3	:	5						:	2	:				
49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25					
TIMEOUT		:	IE	:	RPR	:	COMMUNITY		:	CON:RE	PROMULGATION				:	RR	:							:					
INTERVAL		:	IND	:	OC	:	DESIGNATOR		:	MON:	COUNTER				:	STE:	:	NET NUMBER, DEFAULT						:	---				
		:	:	:	:	:			:	:					:	:	:							:					
5		:	1	:	1	:	4		:	1	:	4		:	1	:	7						:						
						:	69	68	67	66	:	65	64	63	62	61	:	60	59	58	57	56	55	54	53	52	:	51	50
						:	RECURRENCE				:					:							:						
						:	RATE, RECEIPT/				:	RECEIPT/COMPLIANCE				:	SPARE						:	---					
						:	COMPLIANCE				:					:							:						
						:	4				:	5				:	9						:						

WORD DESCRIPTION

WORD NUMBER: J1.5I

WORD TITLE: NET CONTROL INITIALIZATION INITIAL WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BIT #	RESOLUTION, CODING, ETC
				BITS	
1550	001	WORD FORMAT	0-	1 2	00
270	004	LABEL, J-SERIES	2-	6 5	00001
271	005	SUBLABEL, J-SERIES	7-	9 3	101
800	001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
769	006	TRACK NUMBER, ADDRESSEE	13-	27 15	
348	010	NET NUMBER, DEFAULT	28-	34 7	
1776	001	REPROMULGATION RELAY STATE (RR STE)	35	1	
1668	001	REPROMULGATION COUNTER	36-	39 4	
1777	001	CONNECTIVITY MONITOR, ENABLE (CON MON)	40	1	
1774	001	COMMUNITY DESIGNATOR	41-	44 4	
1778	001	REPROMULGATION ORIGINATION CONTROL (RPR OC)	45	1	
1779	001	INITIAL ENTRY INDICATOR (IE IND)	46	1	
1544	001	TIMEOUT INTERVAL	47-	51 5	
756	009	SPARE	52-	60 9	
392	008	RECEIPT/COMPLIANCE	61-	65 5	
444	025	RECURRENCE RATE, RECEIPT/ COMPLIANCE (RRN R/C)	66-	69 4	

			FIELD CODING FOR J1.5I	(SHEET 1)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	006	TRACK NUMBER, ADDRESSEE -----		THE TN OF A UNIT (I.E., JU OR PU) TO WHICH A MESSAGE IS ADDRESSED.
		NO STATEMENT NUMERIC	0 00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		ILLEGAL NUMERIC	00077 (OCTAL) 00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC	00177 (OCTAL)	COLLECTIVE ADDRESS.
		NUMERIC	00200 THROUGH 07776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL NUMERIC	07777 (OCTAL) 10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
348	010	NET NUMBER, DEFAULT -----		INDICATES THE NET NUMBER THE TERMINAL IS TO MONITOR WHEN NOT IMPLEMENTING A SPECIFIC RECEIVE, TRANSMIT, OR RELAY ASSIGNMENT.
		ASSIGNED NET NO STATEMENT	0 THROUGH 126 127	
1776	001	REPROMULGATION RELAY STATE -----		INDICATES WHETHER OR NOT A TERMINAL IS TO RELAY REPROMULGATION RELAY MESSAGES.
		DO NOT RELAY REPROMULGA- TION RELAY MESSAGES	0	
		RELAY REPROMULGATION RE- LAY MESSAGES	1	A TERMINAL SHOULD RELAY ALL REPROMULGATION RELAY MESSAGES RECEIVED IF THE REPROMULGATION COUNTER IN THE RECEIVED MESSAGE IS GREATER THAN ZERO.
1668	001	REPROMULGATION COUNTER -----		

FIELD CODING FOR J1.5I

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1668	001	REPROMULGATION COUNTER -----	(CONTINUED)	
		REPROMULGATION REQUIRED	0 THROUGH 15	INDICATES THE NUMBER OF REPROMULGATIONS REQUIRED.
1777	001	CONNECTIVITY MONITOR, ENABLE -----		INDICATES WHETHER OR NOT A TERMINAL IS TO MONITOR CONNECTIVITY BY LISTENING TO NET STATUS NEEDLINE PG TRANSMISSIONS.
		DO NOT MONITOR CONNECTIVITY	0	
		MONITOR CONNECTIVITY	1	THE TERMINAL SHOULD MONITOR CONNECTIVITY BY LISTENING TO THE NET STATUS NEEDLINE PG TRANSMISSIONS AND SHOULD ESTABLISH LINK QUALITY VALUES FOR ALL COMMUNICANTS.
1774	001	COMMUNITY DESIGNATOR -----		A NUMERICAL VALUE USED TO IDENTIFY A GROUP OF JUS AS ASSOCIATED WITH A PARTICULAR ARMY DIVISION WHEN PARTICIPATING IN THE ARMY CENTRALIZED NET MANAGEMENT.
		NO STATEMENT COMMUNITY DESIGNATOR	0 1 THROUGH 15	
1778	001	REPROMULGATION ORIGINATION CONTROL -----		INDICATES WHETHER OR NOT A JU MAY ORIGINATE REPROMULGATION MESSAGES.
		DO NOT ORIGINATE REPROMULGATION MESSAGES	0	
		REPROMULGATION MESSAGES MAY BE ORIGINATED	1	
1779	001	INITIAL ENTRY INDICATOR -----		INDICATES WHETHER OR NOT A TERMINAL SHALL TRANSMIT J0.0 MESSAGES.
		TRANSMIT J0.0 MESSAGES	0	
		DO NOT TRANSMIT J0.0 MESSAGES	1	
1544	001	TIMEOUT INTERVAL -----		THE NUMBER OF 6 SECOND INTERVALS THAT MUST PASS IN WHICH A TERMINAL RECEIVES NO MESSAGE FROM ITS' CONTROLLING NCS BEFORE A TERMINAL WILL CONSIDER ITS' NCS TO HAVE

FIELD CODING FOR J1.5I

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1544	001	TIMEOUT INTERVAL -----	(CONTINUED)	
		NUMERIC NO STATEMENT	0 THROUGH 30 31	FAILED AND WILL ATTEMPT CONTROL NET ENTRY.
392	008	RECEIPT/COMPLIANCE -----		
		ORIGINAL ORDER	0	RECEIPT/COMPLIANCE RESPONSE REQUIRED.
		ORIGINAL ORDER	1	RECEIPT/COMPLIANCE RESPONSE NOT REQUIRED. MUST BE USED IN CONJUNCTION WITH ORIGINAL ORDER MESSAGES ADDRESSED TO COLLECTIVE ADDRESSES. THE ORIGINAL ORDER SHALL BE TRANSMITTED 3 TIMES.
		MACHINE RECEIPT	2	MESSAGE RECEIVED ERROR FREE.
		WILCO (WILL COMPLY)	3	THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER WILL COMPLY. IN THIS USAGE, THE SYSTEM COMPONENT IS A HUMAN OPERATOR OR (UNMANNED VEHICLE ONLY) A MACHINE.
		HAVCO (HAVE COMPLIED)	4	THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER HAS COMPLIED. IN THIS USAGE, THE SYSTEM COMPONENT MAY BE A HUMAN OPERATOR OR A MACHINE.
		ORIGINAL ORDER	5	RECEIPT/COMPLIANCE RESPONSE (MR AND/ OR CANTPRO ONLY) REQUIRED.
		CANTCO (CANNOT COMPLY)	6	THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER CANNOT COMPLY. IN THIS USAGE, THE SYSTEM COMPONENT IS A HUMAN OPERATOR OR (UNMANNED VEHICLE ONLY) A MACHINE.
		CANTPRO (CANNOT PROCESS)	7	NON-SPECIFIC SYSTEM LIMITATION OR CONFLICT. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	8	TIME SLOT ASSIGNMENT CONFLICT DETECTED. THIS IS AN AUTOMATIC

FIELD CODING FOR J1.5I				(SHEET 4)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
		CANTPRO (CANNOT PROCESS)	9	COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	10	CRYPTOVARIABLE NOT HELD. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	11	PARTICIPATION GROUP NOT DEFINED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	12	APPLICABLE ASSIGNMENT TABLE FULL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	13	RELAY FUNCTION SPECIFIED ALREADY HAS ASSIGNED TIME SLOT BLOCKS FOR WHICH A DIFFERENT RELAY MODE/NET NUMBER HAS BEEN SPECIFIED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	14	INTERFERENCE PROTECTION FEATURES WOULD BE VIOLATED BY ACCEPTANCE OF ASSIGNMENT. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
				HOST SUBSCRIBER INTERFACE IS

FIELD CODING FOR J1.5I				(SHEET 5)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
		CANTPRO (CANNOT PROCESS)	15	INACTIVE AND MESSAGE IS NOT PROCESSED BY THE TERMINAL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	16	TN, ADDRESSEE DOES NOT IMPLEMENT THE ACTION REQUESTED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	17	ONE OR MORE TNS IN THE OM NOT HELD. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	18	TN, REFERENCE OR TN, FRIENDLY WEAPON IS UNDER OWN UNIT CONTROL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	19	UNIT NOT EXERCISING AIR CONTROL CAPABILITY. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	20	UNACCEPTABLE IDENTITY. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	20	ADDRESSEE TN IS INACTIVE. THIS IS AN AUTOMATIC COMPUTER-GENERATED

FIELD CODING FOR J1.5I

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
		CANTPRO (CANNOT PROCESS)	21	RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
				THE FORWARDING UNIT DID NOT RECEIVE A MACHINE RECEIPT FROM THE ADDRESSEE TN. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	22	TN, REFERENCE OR TN, FRIENDLY WEAPON IS NOT UNDER THIS UNIT'S CONTROL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		UNDEFINED NO STATEMENT	23 THROUGH 30 31	
444	025	RECURRENCE RATE, RECEIPT/ COMPLIANCE -----		IDENTIFIES THE TIME SLOT IN WHICH THE RECEIPT/COMPLIANCE FOR THE MESSAGE IS TO BE TRANSMITTED.
		NO STATEMENT	0	
		NUMERIC	1 THROUGH 15	THE NUMERIC VALUE FOR RECEIPT/COMPLIANCE, SPECIFIED AS RECURRENCE RATE NUMBER, DEFINES THE NUMBER N OF CONSECUTIVE TIME SLOTS FROM THE ORIGINAL TRANSMISSION TO THE DONATED TIME SLOT: N=3X2 TO THE (15-RRN) POWER.

.....

WORD TITLE: NET CONTROL INITIALIZATION EXTENSION WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00	
TIME SLOT NUMBER, NET STATUS PARTICIPATION GROUP									:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
									:	TSS	NSN	:	RRN NSN		:	SPARE					:	WORD	:		
									:			:			:						:	FORMAT	:		
									:			:			:						:		:		
15									:	2	:	4		:	7					:	2	:			
49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25	
<---			:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
			:	CS	UI	:	RELAY LEVEL, OWN NET CONTROL:		:	RRN		ONS	:	NET NUMBER, NET STATUS PARTICIPATION GROUP					:	---					
			:	:	:	:	STATION		:				:						:						
			:	2	:	4		:	4		:	7					:								
					:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50
					:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
					:	SP	:	PARTICIPANT INDEX NUMBER					:	NET NUMBER, CONTROL NET ENTRY					:	TIME SLOT OFFSET, CONTROL NET ENTRY					
					:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
					:	1	:	8					:	7					:	7					

WORD DESCRIPTION

WORD NUMBER: J1.5E0

WORD TITLE: NET CONTROL INITIALIZATION EXTENSION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550 001		WORD FORMAT	0-	1 2	10
756 007		SPARE	2-	8 7	
444 022		RECURRENCE RATE, NET STATUS	9-	12 4	
		PARTICIPATION GROUP (RRN NSN)			
847 001		TIME SLOT SET, NET STATUS	13-	14 2	
		PARTICIPATION GROUP (TSS NSN)			
441 003		TIME SLOT NUMBER, NET STATUS	15-	29 15	
		PARTICIPATION GROUP			
348 011		NET NUMBER, NET STATUS	30-	36 7	
		PARTICIPATION GROUP			
444 023		OVERALL RECURRENCE RATE, NET	37-	40 4	SAME CODING AS FOR BITS 9-12.
		STATUS PARTICIPATION GROUP			
		(RRN ONS)			
1775 002		RELAY LEVEL, OWN NET CONTROL	41-	44 4	
		STATION (RLO NCS)			
1780 001		COMMUNICANT STATUS UPDATE	45-	46 2	
		INDICATOR (CS UI)			
348 019		TIME SLOT OFFSET, CONTROL NET	47-	53 7	
		ENTRY			
348 020		NET NUMBER, CONTROL NET ENTRY	54-	60 7	
1782 001		PARTICIPANT INDEX NUMBER	61-	68 8	
756 001		SPARE (SP)	69	1	

FIELD CODING FOR J1.5E0

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
444	022	RECURRENCE RATE, NET STATUS PARTICIPATION GROUP -----		EXPRESSES A NUMBER 'N' WHICH, AS PART OF A TIME SLOT ASSIGNMENT, ESTABLISHES THE NUMBER OF ASSIGNED TIME SLOTS SPACED UNIFORMLY OVER EACH EPOCH.
		1 TIME SLOT PER EPOCH	0	
		2 THROUGH 32,768 TIME SLOTS PER EPOCH	1 THROUGH 15	EXPRESSED AS A POWER OF 2, I.E. BIT CODE 1=2 TO THE FIRST POWER, BIT CODE 2=2 TO THE SECOND POWER, ETC.
847	001	TIME SLOT SET, NET STATUS PARTICIPATION GROUP -----		SPECIFIES THE SET OF TIME SLOTS AS SLOTS A, B, OR C EACH CONSISTING OF 32,768 TIME SLOTS PER EPOCH.
		NO STATEMENT	0	WHEN THE TIME SLOT SET FIELD FOR A TIME SLOT BLOCK ASSIGNMENT IS SET TO NO STATEMENT, THE ENTIRE TIME SLOT BLOCK ASSIGNMENT WILL BE INTERPRETED AS NO STATEMENT.
		SET A	1	
		SET B	2	
		SET C	3	
441	003	TIME SLOT NUMBER, NET STATUS PARTICIPATION GROUP -----		
		NUMERIC	0 THROUGH 32767	IN 1 NUMBER INCREMENTS.
348	011	NET NUMBER, NET STATUS PARTICIPATION GROUP -----		
		ASSIGNED NET	0 THROUGH 126	
		NO STATEMENT	127	
1775	002	RELAY LEVEL, OWN NET CONTROL STATION -----		INDICATES THE DISTANCE IN RELAY HOPS FROM THE TERMINAL TO ITS NET CONTROL STATION ON THE NET STATUS NEEDLINE PARTICIPATION GROUP PATH.
		NO STATEMENT	0	
		1 THROUGH 7 RELAY HOPS	1 THROUGH 7	
		UNDEFINED	8 THROUGH 15	
1780	001	COMMUNICANT STATUS UPDATE INDICATOR -----		INDICATES THE NUMBER OF CONNECTIVITY QUALITIES OF ITS DIRECT COMMUNICANTS THAT A TERMINAL REPORTS IN SUCCESSION.

FIELD CODING FOR J1.5E0

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1780	001	COMMUNICANT STATUS UPDATE INDICATOR -----	(CONTINUED)	
		NO STATEMENT	0	
		64 COMMUNICANTS	1	INDICATES THAT THE TERMINAL REPORTS UP TO 64 CONNECTIVITY QUALITIES OF DIRECT COMMUNICANTS IN SUCCESSION.
		128 COMMUNICANTS	2	INDICATES THAT THE TERMINAL REPORTS UP TO 128 CONNECTIVITY QUALITIES OF ITS DIRECT COMMUNICANTS IN SUCCESSION.
		UNDEFINED	3	
348	019	TIME SLOT OFFSET, CONTROL NET ENTRY -----		INDICATES THE NUMBER OF TIME SLOTS BETWEEN THE NET STATUS PG TIME SLOTS AND THE CONTROL NET ENTRY TIME SLOT OF THE TERMINAL. THE CONTROL NET ENTRY TIME SLOT IS DE- FINED AS A POSITIVE OFFSET FROM THE SLOT IN WHICH THE MESSAGE WAS RECEIVED.
		ILLEGAL NUMERIC	0 THROUGH 16 17 THROUGH 127	
348	020	NET NUMBER, CONTROL NET ENTRY -----		INDICATES THE NET NUMBER OF THE TER- MINALS CONTROL NET ENTRY RECEIVE SLOT.
		NUMERIC	0 THROUGH 126	
		NO STATEMENT	127	
1782	001	PARTICIPANT INDEX NUMBER -----		A NUMBER ASSIGNED TO A JU BY THE NETWORK CONTROL UNIT FOR THE PURPOSE OF ORDERING COMMUNICANTS.
		NO STATEMENT	0	
		PARTICIPANT INDEX NUMBER	1 THROUGH 255	

WORD MAP

WORD NUMBER: J1.5C1

WORD TITLE: NET CONTROL INITIALIZATION CONTINUATION WORD

24	23:	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08:	07:	06	05	04	03	02:	01	00:						
<---		:	TRACK NUMBER, SECONDARY 1														:	:A/D: CONTINUATION WORD				:	WORD	:						
		:															:	:IND: LABEL				:	:FORMAT	:						
		:															:	:					:	:	:					
		:	15														:	1	:	5				:	2	:				
49	48	47	46	45	44	43	42	41	40	39	38:	37	36	35	34	33	32	31	30	29	28	27	26	25						
TRACK NUMBER, SECONDARY 3												:	TRACK NUMBER, SECONDARY 2																	
												:																		
15												:	15																	
					:	69	68:	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53:	52	51	50					
					:	TRACK NUMBER, SECONDARY 4																	:					--->		
					:																		:							
					:	2	:	15														:								

WORD DESCRIPTION

WORD NUMBER: J1.5C1

WORD TITLE: NET CONTROL INITIALIZATION CONTINUATION WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	00001
777 001	ADD/DELETE INDICATOR (A/D IND)	7	1	
769 057	TRACK NUMBER, SECONDARY 1	8-	22 15	
769 058	TRACK NUMBER, SECONDARY 2	23-	37 15	SAME CODING AS FOR BITS 8-22.
769 059	TRACK NUMBER, SECONDARY 3	38-	52 15	SAME CODING AS FOR BITS 8-22.
769 060	TRACK NUMBER, SECONDARY 4	53-	67 15	SAME CODING AS FOR BITS 8-22.
756 002	SPARE (SP)	68-	69 2	

FIELD CODING FOR J1.5C1

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
777	001	ADD/DELETE INDICATOR -----		USED TO INDICATE WHETHER TO ADD OR DELETE THE SECONDARY TNS THAT FOLLOW.
		ADD	0	
		DELETE	1	
769	057	TRACK NUMBER, SECONDARY 1 -----		THE TN OF A JU THAT IS CONSIDERED AS A SECONDARY TN DURING THE NET CONTROL INITIALIZATION PROCESS.
		NO STATEMENT NUMERIC	0 00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		ILLEGAL NUMERIC	00077 (OCTAL) 00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC	00177 (OCTAL)	COLLECTIVE ADDRESS.
		NUMERIC	00200 THROUGH 07776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL NUMERIC	07777 (OCTAL) 10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.

MIL-STD-6016B

J1.6 MESSAGE SUMMARY

PURPOSE

The J1.6 Needline Participation Group Assignment message is used by the designated NCS to assign an addressed JU its associated destination Source TNs with PG numbers to form Needline PGs.

DATA ELEMENT SUMMARY

<u>J1.6I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
TRACK NUMBER, ADDRESSEE	15
SPARE	5
PATH QUALITY MONITORING	2
PATH QUALITY THRESHOLD, 1	3
PATH QUALITY THRESHOLD, 2	4
SPARE	19
RECEIPT/COMPLIANCE	5
RECURRENCE RATE, RECEIPT/ COMPLIANCE	4

<u>J1.6E0</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
PARTICIPATION GROUP, 1(9)*****	9
PARTICIPATION GROUP, 2(9)*****	
RESPONSE TIME	9
ASSIGN/DEASSIGN INDICATOR	2
TRACK NUMBER, ADDRESSEE 1(15)**	
TRACK NUMBER, ADDRESSEE 2(15) *	
TRACK NUMBER, ADDRESSEE 3(15) *	
TRACK NUMBER, ADDRESSEE 4(15) *	
TRACK NUMBER, ADDRESSEE 5(15) *	45
TRACK NUMBER, ADDRESSEE 6(15)**	
SPARE	3

MIL-STD-6016B

J1.6 TRANSMIT/RECEIVE RULES

TITLE: Needline Participation Group Assignment Message

TRANSMIT RULES

The J1.6 Needline Participation Group Assignment message shall be transmitted only by designated NCSs once as follows:

- a. When defining a needline PG to which the addressed JU will direct some of its transmissions.
- b. To change existing needline PG assignments.

RECEIVE RULES

The addressed JU will acknowledge receipt of this message.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J1.6I

WORD TITLE: NEEDLINE PARTICIPATION GROUP ASSIGNMENT INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00							
TRACK NUMBER, ADDRESSEE												:	MESSAGE	:	SUBLABEL,	:							:	WORD	:						
												:	LENGTH	:	J-SERIES	:	LABEL, J-SERIES						:	FORMAT	:						
												:	INDICATOR	:							:		:								
15												:	3	:	3	:	5						:	2	:						
49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25							
<---							:	PATH QUALITY				:					:					:									
							:	THRESHOLD, 2				:	PQL TH1				:	PQL MON				:	SPARE				:	---			
							:					:					:					:									
							:					:					:					:									
							:	4				:	3				:	2				:	5				:				
						:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50					
						:	RECURRENCE				:					:					:										
						:	RATE, RECEIPT/				:	RECEIPT/COMPLIANCE				:					:	SPARE									
						:	COMPLIANCE				:					:					:										
						:	4				:	5				:					:	19									

WORD DESCRIPTION

WORD NUMBER: J1.6I

WORD TITLE: NEEDLINE PARTICIPATION GROUP ASSIGNMENT INITIAL WORD

REFERENCE		BIT #	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0- 1 2	00
270 004	LABEL, J-SERIES	2- 6 5	00001
271 005	SUBLABEL, J-SERIES	7- 9 3	110
800 001	MESSAGE LENGTH INDICATOR	10- 12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
769 006	TRACK NUMBER, ADDRESSEE	13- 27 15	
756 005	SPARE	28- 32 5	
1540 001	PATH QUALITY MONITORING (PQL MON)	33- 34 2	
1540 002	PATH QUALITY THRESHOLD, 1 (PQL TH1)	35- 37 3	
1540 003	PATH QUALITY THRESHOLD, 2	38- 41 4	
756 019	SPARE	42- 60 19	
392 008	RECEIPT/COMPLIANCE	61- 65 5	
444 025	RECURRENCE RATE, RECEIPT/ COMPLIANCE (RRN R/C)	66- 69 4	

FIELD CODING FOR J1.6I

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	006	TRACK NUMBER, ADDRESSEE -----		THE TN OF A UNIT (I.E., JU OR PU) TO WHICH A MESSAGE IS ADDRESSED.
		NO STATEMENT NUMERIC	0 00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		ILLEGAL NUMERIC	00077 (OCTAL) 00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC	00177 (OCTAL)	COLLECTIVE ADDRESS.
		NUMERIC	00200 THROUGH 07776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL NUMERIC	07777 (OCTAL) 10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
1540	001	PATH QUALITY MONITORING -----		DESCRIBES THE TYPE OF PATH MONITOR TO BE USED.
		NO PATH MONITORING	0	
		1-WAY PATH MONITORING	1	
		2-WAY PATH MONITORING	2	
		UNDEFINED	3	
1540	002	PATH QUALITY THRESHOLD, 1 -----		DESCRIBES NUMBER OF SUCCESSIVE MISSED MESSAGES PRIOR TO REPORTING A PATH PROBLEM. USE DEFAULT VALUE.
		NO STATEMENT NUMBER OF MISSED MESSAGES	0 1 THROUGH 7	
1540	003	PATH QUALITY THRESHOLD, 2 -----		DESCRIBES NUMBER OF SUCCESSIVE MISSED MESSAGES PRIOR TO REPORTING A PATH FAILURE.
		NO STATEMENT NUMBER OF MISSED MESSAGES	0 1 THROUGH 15	

		FIELD CODING FOR J1.6I		(SHEET 2)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----		
		ORIGINAL ORDER	0	RECEIPT/COMPLIANCE RESPONSE REQUIRED.
		ORIGINAL ORDER	1	RECEIPT/COMPLIANCE RESPONSE NOT REQUIRED. MUST BE USED IN CONJUNCTION WITH ORIGINAL ORDER MESSAGES ADDRESSED TO COLLECTIVE ADDRESSES. THE ORIGINAL ORDER SHALL BE TRANSMITTED 3 TIMES.
		MACHINE RECEIPT	2	MESSAGE RECEIVED ERROR FREE.
		WILCO (WILL COMPLY)	3	THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER WILL COMPLY. IN THIS USAGE, THE SYSTEM COMPONENT IS A HUMAN OPERATOR OR (UNMANNED VEHICLE ONLY) A MACHINE.
		HAVCO (HAVE COMPLIED)	4	THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER HAS COMPLIED. IN THIS USAGE, THE SYSTEM COMPONENT MAY BE A HUMAN OPERATOR OR A MACHINE.
		ORIGINAL ORDER	5	RECEIPT/COMPLIANCE RESPONSE (MR AND/ OR CANTPRO ONLY) REQUIRED.
		CANTCO (CANNOT COMPLY)	6	THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER CANNOT COMPLY. IN THIS USAGE, THE SYSTEM COMPONENT IS A HUMAN OPERATOR OR (UNMANNED VEHICLE ONLY) A MACHINE.
		CANTPRO (CANNOT PROCESS)	7	NON-SPECIFIC SYSTEM LIMITATION OR CONFLICT. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	8	TIME SLOT ASSIGNMENT CONFLICT DETECTED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	9	CRYPTOVARIABLE NOT HELD. THIS IS AN AUTOMATIC COMPUTER-GENERATED

FIELD CODING FOR J1.6I				(SHEET 3)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
		CANTPRO (CANNOT PROCESS)	10	RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED. PARTICIPATION GROUP NOT DEFINED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	11	APPLICABLE ASSIGNMENT TABLE FULL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	12	RELAY FUNCTION SPECIFIED ALREADY HAS ASSIGNED TIME SLOT BLOCKS FOR WHICH A DIFFERENT RELAY MODE/NET NUMBER HAS BEEN SPECIFIED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	13	INTERFERENCE PROTECTION FEATURES WOULD BE VIOLATED BY ACCEPTANCE OF ASSIGNMENT. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	14	HOST SUBSCRIBER INTERFACE IS INACTIVE AND MESSAGE IS NOT PROCESSED BY THE TERMINAL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.

FIELD CODING FOR J1.6I				(SHEET 4)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
		CANTPRO (CANNOT PROCESS)	15	TN, ADDRESSEE DOES NOT IMPLEMENT THE ACTION REQUESTED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	16	ONE OR MORE TNS IN THE OM NOT HELD. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	17	TN, REFERENCE OR TN, FRIENDLY WEAPON IS UNDER OWN UNIT CONTROL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	18	UNIT NOT EXERCISING AIR CONTROL CAPABILITY. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	19	UNACCEPTABLE IDENTITY. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	20	ADDRESSEE TN IS INACTIVE. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	21	THE FORWARDING UNIT DID NOT RECEIVE A MACHINE RECEIPT FROM THE ADDRESSEE TN. THIS IS AN

FIELD CODING FOR J1.6I

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
		CANTPRO (CANNOT PROCESS)	22	AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED. TN, REFERENCE OR TN, FRIENDLY WEAPON IS NOT UNDER THIS UNIT'S CONTROL. THIS IS AN AUTOMATIC COMPUTER- GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		UNDEFINED NO STATEMENT	23 THROUGH 30 31	
444	025	RECURRENCE RATE, RECEIPT/ COMPLIANCE -----		IDENTIFIES THE TIME SLOT IN WHICH THE RECEIPT/COMPLIANCE FOR THE MESSAGE IS TO BE TRANSMITTED.
		NO STATEMENT	0	
		NUMERIC	1 THROUGH 15	THE NUMERIC VALUE FOR RECEIPT/ COMPLIANCE, SPECIFIED AS RECURRENCE RATE NUMBER, DEFINES THE NUMBER N OF CONSECUTIVE TIME SLOTS FROM THE ORIGINAL TRANSMISSION TO THE DONATED TIME SLOT: N=3X2 TO THE (15-RRN) POWER.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: NEEDLINE PARTICIPATION GROUP ASSIGNMENT EXTENSION WORD

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25	
TRACK NUMBER, ADDRESSEE 2													:	TRACK NUMBER, ADDRESSEE 1											
TRACK NUMBER, ADDRESSEE 5													:	TRACK NUMBER, ADDRESSEE 4											
45																									

:	69	68	67:	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50				
:				TRACK NUMBER, ADDRESSEE 3																:	---		>	
:	SPARE			:																	:			>
:				:	TRACK NUMBER, ADDRESSEE 6																:	---		>
:	3			:																	:			>

WORD DESCRIPTION

WORD NUMBER: J1.6E0

WORD TITLE: NEEDLINE PARTICIPATION GROUP ASSIGNMENT EXTENSION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550 001		WORD FORMAT	0-	1 2	10
838 002		PARTICIPATION GROUP, 1	2-	10 9	TRANSMITTED IN THE FIRST J1.6E0 WORD IN THE J1.6 MESSAGE.
838 003		PARTICIPATION GROUP, 2	2-	10 9	TRANSMITTED IN THE FIRST REPETITION OF THE J1.6E0 WORD IN THE J1.6 MESSAGE. SAME CODING AS FOR BITS 2-10.
1787 001		RESPONSE TIME	11-	19 9	
1788 001		ASSIGN/DEASSIGN INDICATOR (A/D IND)	20-	21 2	
769 017		TRACK NUMBER, ADDRESSEE 1	22-	36 15	TRANSMITTED IN THE FIRST J1.6E0 WORD IN THE J1.6 MESSAGE.
769 019		TRACK NUMBER, ADDRESSEE 2	37-	51 15	TRANSMITTED IN THE FIRST J1.6E0 WORD IN THE J1.6 MESSAGE. SAME CODING AS FOR BITS 22-36.
769 020		TRACK NUMBER, ADDRESSEE 3	52-	66 15	TRANSMITTED IN THE FIRST J1.6E0 WORD IN THE J1.6 MESSAGE. SAME CODING AS FOR BITS 22-36.
769 021		TRACK NUMBER, ADDRESSEE 4	22-	36 15	TRANSMITTED IN THE FIRST REPETITION OF THE J1.6E0 WORD IN THE J1.6 MESSAGE. SAME CODING AS FOR BITS 22-36.
769 022		TRACK NUMBER, ADDRESSEE 5	37-	51 15	TRANSMITTED IN THE FIRST REPETITION OF THE J1.6E0 WORD IN THE J1.6 MESSAGE. SAME CODING AS FOR BITS 22-36.
769 016		TRACK NUMBER, ADDRESSEE 6	52-	66 15	TRANSMITTED IN THE FIRST REPETITION OF THE J1.6E0 WORD IN THE J1.6 MESSAGE. SAME CODING AS FOR BITS 22-36.
756 003		SPARE	67-	69 3	

FIELD CODING FOR J1.6E0

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
838	002	PARTICIPATION GROUP, 1 -----		SPECIFIES THE PARTICIPATION GROUP TO WHICH AN ASSIGNED BLOCK OF TIME SLOTS APPLY.
		NO STATEMENT	0	
		INITIAL ENTRY	1	
		RTT A	2	
		RTT B	3	
		NETWORK MANAGEMENT	4	
		PPLI AND STATUS GROUP A	5	
		PPLI AND STATUS GROUP B	6	
		SURVEILLANCE	7	
		MISSION MANAGEMENT/ WEAPONS COORDINATION	8	
		CONTROL	9	
		ELECTRONIC WARFARE	10	
		UNDEFINED	11	
		VOICE GROUP A	12	
		VOICE GROUP B	13	
		PARTICIPATION GROUPS 14 THROUGH 18	14 THROUGH 18	DEFINED BY INTERFACE OPERATING PROCEDURES AND TACTICAL COMMUNICATIONS PLAN.
		NONC2 JU-TO-NONC2 JU A	19	
		NONC2 JU-TO-NONC2 JU B	20	
		ENGAGEMENT COORDINATION	21	
		COMPOSITE A	22	
		COMPOSITE B	23	
		PARTICIPATION GROUPS 24 THROUGH 26	24 THROUGH 26	DEFINED BY INTERFACE OPERATING PROCEDURES AND TACTICAL COMMUNICATIONS PLAN.
		JOINT NET PPLI	27	
		DISTRIBUTED NETWORK MANAGEMENT	28	
		RESIDUAL MESSAGES	29	
		IJMS POSITION AND STATUS	30	
		OTHER IJMS	31	
		PARTICIPATION GROUPS 32 THROUGH 509	32 THROUGH 509	DEFINED BY INTERFACE OPERATING PROCEDURES AND TACTICAL COMMUNICATIONS PLAN.
		NET CONTROL NEEDLINE	510	
		NET STATUS NEEDLINE	511	
1787	001	RESPONSE TIME -----		THE RESPONSE TIME IN SECONDS RE- QUIRED FOR MESSAGES TRANS- MITTED IN THE REFERENCED PARTICIPATION GROUP.

FIELD CODING FOR J1.6E0

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1787	001	RESPONSE TIME ----- NO STATEMENT 1 THROUGH 511 SECONDS	(CONTINUED) 0 1 THROUGH 511	IN ONE SECOND INCREMENTS.
1788	001	ASSIGN/DEASSIGN INDICATOR ----- NEW ASSIGNMENT AN ADDITION TO A PRE- VIOUS ASSIGNMENT A SUBTRACTION FROM A PREVIOUS ASSIGNMENT A COMPLETE DELETION OF A PREVIOUS ASSIGNMENT(S)	 0 1 2 3	INDICATES THE TYPE OF NEEDLINE PARTICIPATION GROUP ASSIGNMENT BEING MADE.
769	017	TRACK NUMBER, ADDRESSEE 1 ----- NO STATEMENT NUMERIC ILLEGAL NUMERIC NUMERIC NUMERIC NUMERIC ILLEGAL NUMERIC NUMERIC	 0 00001 THROUGH 00076 (OCTAL) 00077 (OCTAL) 00100 THROUGH 00175 (OCTAL) 00176 (OCTAL) 00177 (OCTAL) 00200 THROUGH 07776 (OCTAL) 07777 (OCTAL) 10000 THROUGH 77776 (OCTAL) 77777 (OCTAL)	THE TN OF ONE OF A NUMBER OF UNITS (I.E., JUS OR PUS) TO WHICH A MESSAGE CAN BE ADDRESSED. ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU). ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU). RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS. COLLECTIVE ADDRESS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS. ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

TABLE J2-1. J2 PPLI Word Applicability Table

INITIAL WORD	SUBLABEL							
	J2.0I INDIRECT INTERFACE UNIT PPLI		J2.2I AIR PPLI	J2.3I SURFACE (MARITIME)PPLI	J2.4I SUBSURFACE (MARITIME)PPLI	J2.5I LAND (GROUND) POINT PPLI	J2.6I LAND (GROUND) TRACK PPLI	
EXTENSION WORD - 0	J2.0E0		J2.2E0	J2.3E0	J2.4E0	J2.5E0	J2.6E0	
CONTINUATION WORD - 0								
1	J2.0C1 AMPLIFICATION		J2.2C1 AMPLIFICATION	J2.3C1 AMPLIFICATION	J2.4C1 AMPLIFICATION	J2.5C1 AMPLIFICATION/ MISSION INFORMATION	J2.6C1 AMPLIFICATION/ MISSION INFORMATION	
2			J2.2C2 MISSION INFORMATION	J2.3C2 MISSION INFORMATION	J2.4C2 MISSION INFORMATION			
3			J2.2C3 RELATIVE NAVIGATION	J2.3C3 RELATIVE NAVIGATION	J2.4C3 RELATIVE NAVIGATION	J2.5C3 RELATIVE NAVIGATION	J2.6C3 RELATIVE NAVIGATION	
4					J2.4C4 DISPLACED POSITION	J2.5C4 DISPLACED POSITION		
			J2.2C5 ADDITIONAL MISSION CORRELATORS					
6						J2.5C6 UTM/UPS POSITION	J2.6C6 UTM-TPS POSITION	
.....								
31								

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

J2.0 MESSAGE SUMMARY

PURPOSE

The J2.0 Indirect Interface Unit PPLI message is used to provide Participating Unit/Reporting Unit information on the Link 16 network when network participation status, identification, and positional information is forwarded from Link 11/11B links.

DATA ELEMENT SUMMARY

<u>J2.0I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
EXERCISE INDICATOR	1
SPARE	1
FORCE TELL INDICATOR	1
EMERGENCY INDICATOR	1
COMMAND AND CONTROL INDICATOR	1
SIMULATION INDICATOR	1
SPARE	21
ALTITUDE, 25 FT	13
SPARE	8
SITE	3
UNIT TYPE	4
ORIGINATOR ENVIRONMENT/ CATEGORY	2

<u>J2.0E0</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
SPARE	3
LATITUDE, 0.0103 MINUTE	20
SPARE	3
LONGITUDE, 0.0103 MINUTE	21
SPARE	1
COURSE	9
SPEED	11

<u>J2.0C1</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
CONTINUATION WORD LABEL	5
SPARE	1
MODE I CODE	5
MODE II CODE	12
MODE III CODE	12
SPARE	33

MIL-STD-6016B

J2.0 TRANSMIT/RECEIVE RULES

TITLE: Indirect Interface Unit PPLI Message

TRANSMIT RULES

1. The J2.0B Indirect Interface Unit PPLI basic message consists of the J2.0I Indirect Interface Unit PPLI initial word and the J2.0E0 Indirect Interface Unit PPLI extension word. The J2.0B basic message shall be transmitted by a Forwarding JTIDS/MIDS Unit when data received from an indirect interface unit, i.e., Participating Unit/Reporting Unit, indicate that the unit is active. The J2.0B message shall be transmitted periodically at a RRN = 6 (12 seconds, 8-20 second interval) or, when specified, at the access rate in the time slot assignment.
2. The J2.0C1 word shall be transmitted by a forwarding JTIDS/MIDS unit with the next periodic update of the J2.0B message when IFF/SIF data are received from an indirect interface unit.

RECEIVE RULES

There are no receive rules specified for this message.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J2.0I

WORD TITLE: INDIRECT INTERFACE UNIT PPLI INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00					
					:SIM:C2 :EMG:FT :					:EX :		MESSAGE :			SUBLABEL, :								: WORD :						
<---					:IND:IND:IND:IND:SP :					:IND:		LENGTH :			J-SERIES :			LABEL, J-SERIES :			:FORMAT :								
					:					:		INDICATOR :											:						
					: 1 : 1 : 1 : 1 : 1 :					:		3 :			3 :			5 :			2 :								
49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25					
										:																			
ALTITUDE, 25 FT										:										SPARE									
										:																			
13										:										21									
					: 69 68: 67 66 65 64: 63 62 61: 60 59 58 57 56 55 54 53: 52 51 50																								
					:																								
:ENV CAT:					UNIT TYPE					SITE					SPARE										: --->				
					: 2 :					4 :					3 :					8 :									

WORD DESCRIPTION

WORD NUMBER: J2.0I

WORD TITLE: INDIRECT INTERFACE UNIT PPLI INITIAL WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	00
270	004	LABEL, J-SERIES	2-	6 5	00010
271	005	SUBLABEL, J-SERIES	7-	9 3	000
800	001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
385	003	EXERCISE INDICATOR (EX IND)	13	1	FIELD RETAINED AGAINST FUTURE USE.
756	001	SPARE (SP)	14	1	
354	002	FORCE TELL INDICATOR (FT IND)	15	1	
355	002	EMERGENCY INDICATOR (EMG IND)	16	1	
893	001	COMMAND AND CONTROL INDICATOR (C2 IND)	17	1	
1604	001	SIMULATION INDICATOR (SIM IND)	18	1	
756	021	SPARE	19-	39 21	
365	033	ALTITUDE, 25 FT	40-	52 13	
756	008	SPARE	53-	60 8	
1719	001	SITE	61-	63 3	
288	001	UNIT TYPE	64-	67 4	SEE NOTE 1.
275	001	ORIGINATOR ENVIRONMENT/ CATEGORY (ENV CAT)	68-	69 2	SEE NOTE 1.

J2.0I WORD NOTES
NOTE 1 Originator Environment/Category - Unit Type

ORG ENV/CAT UNIT TYPE	0 SURFACE	1 SUBSURFACE	2 LAND	3 AIR
0	NO STATEMENT	NO STATEMENT	NO STATEMENT	NO STATEMENT
1	UNDEFINED	UNDEFINED	TACTICAL AIR OPERATIONS CENTER (TAOC)	PATROL AIRCRAFT (VP)
2	AIRCRAFT CARRIER (CV)	UNDEFINED	TACTICAL AIR CONTROL CENTER (TACC)	ANTISUBMARINE WARFARE AIRCRAFT (VS)
3	CRUISER (CRU)	UNDEFINED	ANTISUBMARINE WARFARE OPERATIONS CENTER (ASWOC)/MARITIME HEADQUARTERS	AIRBORNE EARLY WARNING (AEW)
4	DESTROYER (DD)/ ANTI-AIR WARFARE (AAW)	UNDEFINED	BUFFER CENTER	AIRBORNE TACTICAL DATA SYSTEM (ATDS)
5	DESTROYER (DD)/ ANTISUBMARINE WARFARE (ASW)	UNDEFINED	CONTROL AND REPORTING CENTER (CRC)	AIRBORNE WARNING AND CONTROL SYSTEM (AWACS)
6	DESTROYER (DD)/ ESCORT GENERAL	UNDEFINED	CONTROL AND REPORTING POST (CRP)	HELICOPTER (HELO)
7	FAST PATROL BOAT	UNDEFINED	NORAD CONTROL CENTER (NCC)	UNDEFINED
8	LHA/LHD	UNDEFINED	REGIONAL CONTROL CENTER (RCC)	UNDEFINED
9	AMPHIBIOUS COMMAND SHIP (LCC)	UNDEFINED	DIRECTION CENTER (DC)	UNDEFINED
10	FRIGATE	UNDEFINED	ARMY AIR DEFENSE COMMAND POST (AADCP)	UNDEFINED
11	MINE WARFARE VESSEL	UNDEFINED	UNDEFINED	UNDEFINED
12	AUXILIARY	UNDEFINED	UNDEFINED	UNDEFINED
13 - 15	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED

FIELD CODING FOR J2.0I

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
385	003	EXERCISE INDICATOR ----- NON-EXERCISE TRACK EXERCISE TRACK OR UNIT	0 1	INDICATES WHETHER OR NOT THE MESSAGE IDENTIFIES AN EXERCISE TRACK.
354	002	FORCE TELL INDICATOR ----- NO STATEMENT FORCE TELL STATUS	0 1	THIS INDICATOR CAUSES TRACK/POINT DATA TO BE FORCED THROUGH CONTROLLABLE RECEIVE FILTERS.
355	002	EMERGENCY INDICATOR ----- NO STATEMENT EMERGENCY STATUS	0 1	USED TO INDICATE WHETHER OR NOT A UNIT OR TRACK HAS AN EMERGENCY.
893	001	COMMAND AND CONTROL INDICATOR ----- NONC2 UNIT C2 UNIT	0 1	THIS INDICATOR ALLOWS A JU TO IDENTIFY ITSELF AS A NONC2 OR C2 UNIT. THE UNIT BEING REPORTED IS A NONC2 UNIT. THE UNIT BEING REPORTED IS A C2 UNIT.
1604	001	SIMULATION INDICATOR ----- REAL TRACK OR UNIT SIMULATED TRACK OR UNIT	0 1	INDICATES WHETHER THE TRACK REFER- ENCED IN THE MESSAGE IS A REAL OR A SIMULATED TRACK.
365	033	ALTITUDE, 25 FT ----- 0 THROUGH 204,750 FEET ALTITUDE UNKNOWN	0 THROUGH 8190 8191	EXPRESSES ALTITUDE AS MEASURED OUT- WARD FROM THE EARTH AS A POSITIVE QUANTITY ABOVE MEAN SEA LEVEL (MSL) IN FEET. IN 25 FEET INCREMENTS.
1719	001	SITE ---- NO STATEMENT FPU/FRU PU RU	0 1 2 3	USED TO INDICATE THE TYPE OF LINK 11/11B UNIT THAT THE JTIDS/MIDS UNIT IS FORWARDING THE POSITION OF.

FIELD CODING FOR J2.0I			(SHEET 2)
DFI	DUI	DUI/DI NAME	DUI/DI EXPLANATION
1719	001	SITE	(CONTINUED)

		UNDEFINED	4 THROUGH 7

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: INDIRECT INTERFACE UNIT PPLI EXTENSION WORD

: 49:	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28:	27	26	25:
: SP :	LONGITUDE, 0.0103 MINUTE																				:	SPARE		:
: 1 :	21																				:	3		:

:	69	68	67	66	65	64	63	62	61	60	59:	58	57	56	55	54	53	52	51	50:			
:												:											:
:	SPEED											:	COURSE										:
:												:											:
:	11											:	9										:

WORD DESCRIPTION

WORD NUMBER: J2.0E0
WORD TITLE: INDIRECT INTERFACE UNIT PPLI EXTENSION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT #		RESOLUTION, CODING, ETC
			POSITION	BITS	
1550 001		WORD FORMAT	0-	1 2	10
756 003		SPARE	2-	4 3	
281 017		LATITUDE, 0.0103 MINUTE	5-	24 20	
756 003		SPARE	25-	27 3	
282 013		LONGITUDE, 0.0103 MINUTE	28-	48 21	
756 001		SPARE (SP)	49	1	
371 015		COURSE	50-	58 9	
367 018		SPEED	59-	69 11	

FIELD CODING FOR J2.0E0

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
281	017	LATITUDE, 0.0103 MINUTE -----		THE PRECISION IS APPROXIMATELY 63 FEET. IN 90/524,287 DEGREE INCREMENTS.
		0 DEGREES	0	
		+90/524,287 THROUGH +90 DEGREES NORTH	1 THROUGH 524287	
		NO STATEMENT	524288	
		-90 THROUGH -90/524,287 DEGREES SOUTH	524289 THROUGH 1048575	
282	013	LONGITUDE, 0.0103 MINUTE -----		THE PRECISION IS APPROXIMATELY 63 FEET. IN 180/1,048,575 DEGREE INCREMENTS.
		0 DEGREES	0	
		+180/1,048,575 THROUGH +180 DEGREES EAST	1 THROUGH 1048575	
		NO STATEMENT	1048576	
		-180 THROUGH -180/1,048,575 DEGREES WEST	1048577 THROUGH 2097151	
371	015	COURSE -----		INDICATES THE DIRECTION OF TRAVEL OF AN OBJECT IN DEGREES WITH RESPECT TO TRUE NORTH. IN 1 DEGREE INCREMENTS.
		0 THROUGH 359 DEGREES	0 THROUGH 359	
		ILLEGAL	360 THROUGH 510	
		NO STATEMENT	511	
367	018	SPEED -----		THE RATE OF CHANGE OF POSITION.
		0 THROUGH 4092 DATA MILES PER HOUR	0 THROUGH 2046	EXPRESSES GROUND SPEED IN 2 DATA MILES PER HOUR INCREMENTS.
		NO STATEMENT	2047	

5.1-304

MIL-STD-6016B

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: INDIRECT INTERFACE UNIT PPLI - AMPLIFICATION CONTINUATION
WORD

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25	
													:												:
<---													:	MODE III CODE											:
													:												:
													:	12											:

```

:                                     SPARE
:
:-----
:                                     33

```

WORD DESCRIPTION

WORD NUMBER: J2.0C1

WORD TITLE: INDIRECT INTERFACE UNIT PPLI - AMPLIFICATION CONTINUATION
WORD

REFERENCE		BIT #		RESOLUTION, CODING, ETC
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	00001
756 001	SPARE (SP)	7	1	
293 003	MODE I CODE	8-	12 5	
294 002	MODE II CODE	13-	24 12	
295 002	MODE III CODE	25-	36 12	
756 033	SPARE	37-	69 33	

FIELD CODING FOR J2.0C1

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
293	003	MODE I CODE -----		PROVIDES MODE I BEACON REPLY INFORMATION. WITHIN THE MODE FIELD, SIF CODES ARE IN THE ORDER A4 A2 A1 B2 B1. THE LEAST SIGNIFICANT DIGIT CANNOT BE GREATER THAN 3. THIS CODE CANNOT BE ASSIGNED AS AN OPERATIONAL CODE. INDICATES THERE ARE NO DATA FOR TRANSMISSION.
		0 (NO STATEMENT)	00 (OCTAL)	
		1	01 (OCTAL)	
		2	02 (OCTAL)	
		3	03 (OCTAL)	
		4	10 (OCTAL)	
		5	11 (OCTAL)	
		6	12 (OCTAL)	
		7	13 (OCTAL)	
		8	20 (OCTAL)	
		9	21 (OCTAL)	
		10	22 (OCTAL)	
		11	23 (OCTAL)	
		12	30 (OCTAL)	
		13	31 (OCTAL)	
		14	32 (OCTAL)	
		15	33 (OCTAL)	
		16	40 (OCTAL)	
		17	41 (OCTAL)	
		18	42 (OCTAL)	
		19	43 (OCTAL)	
		20	50 (OCTAL)	
		21	51 (OCTAL)	
		22	52 (OCTAL)	
		23	53 (OCTAL)	
		24	60 (OCTAL)	
		25	61 (OCTAL)	
		26	62 (OCTAL)	
		27	63 (OCTAL)	
		28	70 (OCTAL)	
		29	71 (OCTAL)	
		30	72 (OCTAL)	
		31	73 (OCTAL)	
294	002	MODE II CODE -----		PROVIDES MODE II BEACON REPLY INFORMATION. THIS CODE CANNOT BE ASSIGNED AS AN OPERATIONAL CODE. INDICATES THERE
		NO STATEMENT	0	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
294	002	MODE II CODE -----	(CONTINUED)	
		1 THROUGH 7777 (OCTAL)	0001 THROUGH 7777 (OCTAL)	ARE NO DATA FOR TRANSMISSION. WITHIN THE FIELD, SIF CODES ARE IN THE ORDER A, B, C, D WITH EACH TRIAD IN THE ORDER 4, 2, 1.
295	002	MODE III CODE -----		PROVIDES MODE III BEACON REPLY INFORMATION.
		NO STATEMENT	0	THIS CODE CANNOT BE ASSIGNED AS AN OPERATIONAL CODE. INDICATES THERE ARE NO DATA FOR TRANSMISSION.
		1 THROUGH 7777 (OCTAL)	0001 THROUGH 7777 (OCTAL)	WITHIN THE FIELD, SIF CODES ARE IN THE ORDER A, B, C, D WITH EACH TRIAD IN THE ORDER 4, 2, 1.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

J2.2 MESSAGE SUMMARY

PURPOSE

The J2.2 Air PPLI message is used to provide all JUs information about airborne JUs on the Link 16 network. It is used by airborne JUs to provide network participation status, identification, positional information and relative navigation information.

DATA ELEMENT SUMMARY

<u>J2.2I</u>		<u>J2.2C1 (Continued)</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	SPARE	1
LABEL, J-SERIES	5	MODE I CODE	5
SUBLABEL, J-SERIES	3	MODE II CODE	12
MESSAGE LENGTH INDICATOR	3	MODE III CODE	12
EXERCISE INDICATOR	1	AIR PLATFORM	6
MISSION COMMANDER INDICATOR	1	AIR PLATFORM ACTIVITY	7
FORCE TELL INDICATOR	1	SPARE	20
EMERGENCY INDICATOR	1		
COMMAND AND CONTROL INDICATOR	1	<u>J2.2C2</u>	
SIMULATION INDICATOR	1	DATA ELEMENT	# BITS
AIRBORNE INDICATOR	1	WORD FORMAT	2
FLIGHT LEADER INDICATOR	1	CONTINUATION WORD LABEL	5
ACTIVE RELAY INDICATOR, WIDE	1	VOICE CALL SIGN INDICATOR	1
AREA NETWORK		LINK 4A ADDRESS INDICATOR	1
RTT REPLY STATUS INDICATOR	1	VOICE CALL SIGN	24
NETWORK PARTICIPATION STATUS	4	LINK 4A ADDRESS	13
INDICATOR		VOICE FREQUENCY/CHANNEL	13
TIME QUALITY	4	CONTROL CHANNEL	7
GEODETIC POSITION QUALITY	4	ACTIVE RELAY INDICATOR, VOICE	1
STRENGTH	4	CHANNEL	
BAILOUT INDICATOR	1	ACTIVE RELAY INDICATOR,	1
ALTITUDE, 25 FT	13	CONTROL CHANNEL	
NET NUMBER, NONC2 JU-TO-NONC2	7	VOICE FREQUENCY/CHANNEL	1
JU NPG A		INDICATOR	
NONC2 JU-TO-NONC2 JU NPG	1	SPARE	1
STATUS A			
ALTITUDE QUALITY	4	<u>J2.2C3</u>	
SPARE	5	DATA ELEMENT	# BITS
		WORD FORMAT	2
<u>J2.2E0</u>		CONTINUATION WORD LABEL	5
DATA ELEMENT	# BITS	SPARE	1
WORD FORMAT	2	U COORDINATE	20
LATITUDE, 0.0013 MINUTE	23	V COORDINATE	20
LONGITUDE, 0.0013 MINUTE	24	BETA ANGLE	15
SPARE	1	RELATIVE POSITION QUALITY	4
COURSE	9	RELATIVE AZIMUTH QUALITY	3
SPEED	11		
		<u>J2.2C5</u>	
<u>J2.2C1</u>		DATA ELEMENT	# BITS
DATA ELEMENT	# BITS	WORD FORMAT	2
WORD FORMAT	2	CONTINUATION WORD LABEL	5
CONTINUATION WORD LABEL	5		

MIL-STD-6016B

J2.2 MESSAGE SUMMARY (Continued)

DATA ELEMENT SUMMARY (Continued)

<u>J2.2C5 (Continued)</u>	
<u>DATA ELEMENT</u>	<u># BITS</u>
NET NUMBER, NONC2 JU-TO-NONC2	7
JU NPG B	
NONC2 JU-TO-NONC2 JU NPG	1
STATUS B	
MISSION CORRELATOR	8
WINGMAN IDENTIFICATION LETTER/ NUMBER	6
SPARE	2
TRACK NUMBER, MISSION COMMANDER	15
SPARE	1
TRACK NUMBER, FLIGHT LEAD	15
SPARE	8

MIL-STD-6016B

J2.2 TRANSMIT/RECEIVE RULES

TITLE: Air PPLI Message

TRANSMIT RULES

1. The J2.2B Air PPLI basic message consists of the J2.2I Air PPLI initial word and the J2.2E0 Air PPLI extension word. The J2.2B basic message shall be transmitted periodically at a RRN = 6 (12 seconds, 8-20 second interval) or, when specified, at the access rate in the time slot assignment by airborne JUs when their terminals are operating in the Normal Mode and the Network Participation Status Indicator field is set to one of the following:

- a. Active.
- b. No J0.0 Message Being Received.
- c. High Error Rate.
- d. Tactical Data System (TDS) Failure.

2. Applicable continuation words shall be transmitted in a J2.2I/J2.2E0/J2.2CX word sequence. Only one continuation word shall follow the extension word when only three words are allowed in any one time slot.

3. When the JU is assigned to transmit in the joint PPLI network PG or is neither an active voice relay or active control relay and assigned to transmit in the PPLI A or PPLI B network PG, it shall transmit in each assigned PG a J2.2I/J2.2E0/J2.2C3 word sequence in every second time slot in which a J2.2B message is scheduled for transmission. The intervening transmissions shall be a J2.2I/J2.2E0/J2.2CX word sequence with the sequence of J2.2CX words in the following order:

- a. J2.2C1 Air PPLI - Amplification continuation word.
- b. J2.2C2 Air PPLI - Mission Information continuation word.
- c. J2.2C5 Air PPLI - Additional Mission Correlators continuation word.

J2.2 TRANSMIT/RECEIVE RULES (Continued)

TRANSMIT RULES (Continued)

d. J2.2C2 Air PPLI - Mission Information continuation word.

4. When the JU is either an active voice relay or active control relay and assigned to transmit in either the PPLI A or PPLI B network PG it shall transmit in both PGs a J2.2I/J2.2E0/J2.2C2 word sequence in every second time slot in which a J2.2B message is scheduled for transmission. The intervening transmissions shall be a J2.2I/J2.2E0/J2.2CX word sequence with the sequence of J2.2CX words in the following order:

a. J2.2C1 Air PPLI - Amplification continuation word.

b. J2.2C3 Air PPLI - Relative Navigation continuation word.

c. J2.2C5 Air PPLI - Additional Mission Correlators continuation word.

d. J2.2C3 Air PPLI - Relative Navigation continuation word.

5. When data within a J2.2C1, J2.2C2, J2.2C3, or J2.2C5 word change and only three words are allowed in a time slot, a J2.2I/J2.2E0/J2.2CX word sequence shall replace the next Air PPLI message in the sequence except that a J2.2I/J2.2E0/J2.2C2 word sequence shall not be replaced if the JU is an active voice or active control relay. If more than three words can be transmitted in a time slot, a J2.2I/J2.2E0/J2.2CX/J2.2CX/J2.2CX/J2.2CX/etc. word sequence shall be transmitted according to transmit rules 3 and 4 above except that no continuation word shall be repeated in the same time slot.

If any of the continuation words having changed data cannot be transmitted in the next time slot because of the number of transmissions allowed in the time slot, transmission shall occur such that the J2.2C2 word has the first priority, the J2.2C3 word has the second priority, the J2.2C1 word has the third priority, and the J2.2C5 has the fourth priority.

J2.2 TRANSMIT/RECEIVE RULES (Continued)

TRANSMIT RULES (Continued)

6. If no data is available for a continuation word then that continuation word shall be deleted from the sequence and the next continuation word in the sequence transmitted. If no data exists for all continuation words, the J2.2B message shall be transmitted.

7. A J2.2I/J2.2E0/J2.2C3 word sequence shall be transmitted with the Network Participation Status Indicator field set to the appropriate condition prior to the terminal taking the action described (Radio Silence, Polling, Inactive) or in the next transmission opportunity after the condition occurs (High Error Rate, No J0.0 Message Being Received, TDS Failure).

8. A J2.2I/J2.2E0/J2.2C1 word sequence shall be transmitted periodically at a RRN = 7 (6 seconds, 3-9 second interval) when the bailout indicator is set in the J2.2I word.

9. When a nonC² JU is engaging in an intercept, a word sequence as specified in transmit rule 3 and 4 above shall be transmitted periodically either at a RRN = 7 (6 seconds, 3-9 second interval) or at the access rate specified in the assignment whichever is greater.

10. For special conditions specified by an aircraft's weapon system, a word sequence as specified in transmit rule 3 and 4 above shall be transmitted periodically as follows:

- a. For short periods of time for flight location.
- b. For extended periods of time for precision bombing or controlled approaches.
- c. Either at a RRN = 11 (.375 seconds, .250-.500 second interval) or at the access rate specified in the assignment whichever is greater.

11. A J2.2B basic message shall be transmitted in response to a J0.6 Communications Control message in the time slot provided. If the terminal is

J2.2 TRANSMIT/RECEIVE RULES (Continued)

in the Polling Mode, the RTT Reply Status Indicator field shall be set to not operational.

RECEIVE RULES

All received nonsimulated (Simulation Indicator = 0) and nonrelayed (Relayed Transmission Indicator = 0) J2.2 messages shall be processed in accordance with the requirements for terminal synchronization and relative navigation.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD TITLE: AIR PPLI INITIAL WORD

[illegible]

WORD DESCRIPTION

WORD NUMBER: J2.2I

WORD TITLE: AIR PPLI INITIAL WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	00
270	004	LABEL, J-SERIES	2-	6 5	00010
271	005	SUBLABEL, J-SERIES	7-	9 3	010
800	001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
385	003	EXERCISE INDICATOR (EX IND)	13	1	
1901	001	MISSION COMMANDER INDICATOR (MC IND)	14	1	
354	002	FORCE TELL INDICATOR (FT IND)	15	1	
355	002	EMERGENCY INDICATOR (EMG IND)	16	1	
893	001	COMMAND AND CONTROL INDICATOR (C2 IND)	17	1	
1604	001	SIMULATION INDICATOR (SIM IND)	18	1	
732	002	AIRBORNE INDICATOR (ABN IND)	19	1	
730	001	FLIGHT LEADER INDICATOR (FLT LD)	20	1	
1571	002	ACTIVE RELAY INDICATOR, WIDE AREA NETWORK (ARI WAN)	21	1	
274	001	RTT REPLY STATUS INDICATOR (RRS)	22	1	
1613	001	NETWORK PARTICIPATION STATUS INDICATOR (NPS IND)	23-	26 4	
279	001	TIME QUALITY	27-	30 4	
283	001	GEODETIC POSITION QUALITY	31-	34 4	
386	013	STRENGTH	35-	38 4	
1646	001	BAILOUT INDICATOR (BLT IND)	39	1	
365	033	ALTITUDE, 25 FT	40-	52 13	
348	002	NET NUMBER, NONC2 JU-TO-NONC2 JU NPG A	53-	59 7	
1625	012	NONC2 JU-TO-NONC2 JU NPG STATUS A (NON STS A)	60	1	
283	002	ALTITUDE QUALITY	61-	64 4	
756	005	SPARE	65-	69 5	

FIELD CODING FOR J2.2I

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
385	003	EXERCISE INDICATOR ----- NON-EXERCISE TRACK EXERCISE TRACK OR UNIT	0 1	INDICATES WHETHER OR NOT THE MESSAGE IDENTIFIES AN EXERCISE TRACK.
1901	001	MISSION COMMANDER INDICATOR ----- NOT MISSION COMMANDER MISSION COMMANDER	0 1	INDICATES WHETHER OR NOT THE AIRCRAFT IS A MISSION COMMANDER.
354	002	FORCE TELL INDICATOR ----- NO STATEMENT FORCE TELL STATUS	0 1	THIS INDICATOR CAUSES TRACK/POINT DATA TO BE FORCED THROUGH CONTROLLABLE RECEIVE FILTERS.
355	002	EMERGENCY INDICATOR ----- NO STATEMENT EMERGENCY STATUS	0 1	USED TO INDICATE WHETHER OR NOT A UNIT OR TRACK HAS AN EMERGENCY.
893	001	COMMAND AND CONTROL INDICATOR ----- NONC2 UNIT C2 UNIT	0 1	THIS INDICATOR ALLOWS A JU TO IDENTIFY ITSELF AS A NONC2 OR C2 UNIT. THE UNIT BEING REPORTED IS A NONC2 UNIT. THE UNIT BEING REPORTED IS A C2 UNIT.
1604	001	SIMULATION INDICATOR ----- REAL TRACK OR UNIT SIMULATED TRACK OR UNIT	0 1	INDICATES WHETHER THE TRACK REFER- ENCED IN THE MESSAGE IS A REAL OR A SIMULATED TRACK.
732	002	AIRBORNE INDICATOR ----- NOT AIRBORNE AIRBORNE	0 1	INDICATES WHETHER OR NOT AN AIRCRAFT IS AIRBORNE.
730	001	FLIGHT LEADER INDICATOR ----- NOT FLIGHT LEADER FLIGHT LEADER	0 1	INDICATES WHETHER OR NOT THE AIRCRAFT IS A FLIGHT LEADER.

FIELD CODING FOR J2.2I

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1571	002	ACTIVE RELAY INDICATOR, WIDE AREA NETWORK ----- RELAYING FUNCTION INACTIVE RELAYING FUNCTION ACTIVE	0 1	INDICATES THE STATUS OF A UNIT'S RE- LAYING CAPABILITY OVER THE WIDE- AREA NETWORK.
274	001	RTT REPLY STATUS INDICATOR ----- RTT REPLY FUNCTION NORMAL RTT REPLY FUNCTION NOT OPERATIONAL	0 1	CONVEYS THE STATUS OF A TERMINAL'S RTT REPLY FUNCTION.
1613	001	NETWORK PARTICIPATION STATUS INDICATOR ----- NO STATEMENT ACTIVE-NON SPECIFIC INACTIVE-NON SPECIFIC CONDITIONAL RADIO SILENCE HIGH ERROR RATE NO JO.0 MESSAGE BEING RECEIVED TACTICAL DATA SYSTEM FAILURE POLLING UNDEFINED	0 1 2 3 4 5 6 7 8 THROUGH 15	INDICATES TO WHAT DEGREE A UNIT IS PARTICIPATING ON THE INTERFACE.
279	001	TIME QUALITY ----- > 18080 NANOSECONDS < OR = 18080 NANOSECONDS < OR = 9040 NANOSECONDS < OR = 4520 NANOSECONDS < OR = 2260 NANOSECONDS < OR = 1600 NANOSECONDS < OR = 1130 NANOSECONDS < OR = 800 NANOSECONDS < OR = 565 NANOSECONDS	0 1 2 3 4 5 6 7 8	THE QUALITY IS STATED AS A NUMERICAL VALUE FROM 0 TO 15 WHERE THE HIGHER VALUES INDICATE THE HIGHER QUALITIES. QUALITY 0 IS NOT TO BE USED FOR SYNCHRONIZATION OR THE RELATIVE NAVIGATION FUNCTION.

FIELD CODING FOR J2.2I

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

279	001	TIME QUALITY	(CONTINUED)	
-----	-----	--------------	-------------	--

< OR = 400 NANOSECONDS	9
< OR = 282 NANOSECONDS	10
< OR = 200 NANOSECONDS	11
< OR = 141 NANOSECONDS	12
< OR = 100 NANOSECONDS	13
< OR = 71 NANOSECONDS	14
NET TIME REFERENCE	15

283	001	GEODETIC POSITION QUALITY		
-----	-----	---------------------------	--	--

THE LEVEL OF GEODETIC POSITION
UNCERTAINTY AS ESTIMATED BY THE
TERMINAL NAVIGATION FUNCTION.

>18080 FT	0
< OR = TO 18080 FT	1
< OR = TO 9040 FT	2
< OR = TO 4520 FT	3
< OR = TO 2260 FT	4
< OR = TO 1600 FT	5
< OR = TO 1130 FT	6
< OR = TO 800 FT	7
< OR = TO 565 FT	8
< OR = TO 400 FT	9
< OR = TO 282 FT	10
< OR = TO 200 FT	11
< OR = TO 141 FT	12
< OR = TO 100 FT	13
< OR = TO 71 FT	14
< OR = TO 50 FT	15

386	013	STRENGTH		
-----	-----	----------	--	--

EXPRESSES THE NUMBER OF ENTITIES
REPRESENTED BY A SINGLE TRACK.

NO STATEMENT	0
1 UNIT	1
2 UNITS	2
3 UNITS	3
4 UNITS	4
5 UNITS	5
6 UNITS	6
7 UNITS	7
8 UNITS	8
9 UNITS	9
10 UNITS	10
11 UNITS	11
12 UNITS	12

		FIELD CODING FOR J2.2I		(SHEET 4)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
386	013	STRENGTH ----- 2 THROUGH 7 (FEW) UNITS GREATER THAN 7 (MANY) UNITS GREATER THAN 12 UNITS	(CONTINUED) 13 14 15	
1646	001	BAILOUT INDICATOR ----- NO STATEMENT BAILED OUT	 0 1	INDICATES PILOT/CREW EGRESS FROM AN AIRCRAFT.
365	033	ALTITUDE, 25 FT ----- 0 THROUGH 204,750 FEET ALTITUDE UNKNOWN	 0 THROUGH 8190 8191	EXPRESSES ALTITUDE AS MEASURED OUT- WARD FROM THE EARTH AS A POSITIVE QUANTITY ABOVE MEAN SEA LEVEL (MSL) IN FEET. IN 25 FEET INCREMENTS.
348	002	NET NUMBER, NONC2 JU-TO-NONC2 JU NPG A ----- NUMERIC NO STATEMENT	 0 THROUGH 126 127	INDICATES THE NONC2 JU-TO-NONC2 JU NPG NET NUMBER ON WHICH SOURCE TN IS ASSIGNED TO OPERATE. ASSIGNED NPG NET NUMBER.
1625	012	NONC2 JU-TO-NONC2 JU NPG STATUS A ----- ACTIVE INACTIVE	 0 1	INDICATES NPG STATUS WHEN THE SOURCE TN IS OPERATING ON THE LINK 16 NONC2 JU-TO-NONC2 JU NPG, A. APPLIES ONLY WHEN NONC2 JU-TO- NONC2 JU NPG NET NUMBER IS SET TO VALUE 0-126.
283	002	ALTITUDE QUALITY ----- >18080 FT < OR = TO 18080 FT < OR = TO 9040 FT < OR = TO 4520 FT < OR = TO 2260 FT < OR = TO 1600 FT < OR = TO 1130 FT < OR = TO 800 FT	 0 1 2 3 4 5 6 7	THE LEVEL OF HEIGHT UNCERTAINTY AS ESTIMATED BY THE TERMINAL NAVIGATION FUNCTION.

			FIELD CODING FOR J2.2I	(SHEET 5)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
283	002	ALTITUDE QUALITY	(CONTINUED)	

		< OR = TO 565 FT	8	
		< OR = TO 400 FT	9	
		< OR = TO 282 FT	10	
		< OR = TO 200 FT	11	
		< OR = TO 141 FT	12	
		< OR = TO 100 FT	13	
		< OR = TO 71 FT	14	
		< OR = TO 50 FT	15	

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: AIR PPLI EXTENSION WORD

: 49:	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25:
: SP :	LONGITUDE, 0.0013 MINUTE																				:			
: 1 :	24																				:			

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50	:		
:												:											:
:	SPEED											:	COURSE										:
:												:											:
:	11											:	9										:

WORD DESCRIPTION

WORD NUMBER: J2.2E0
WORD TITLE: AIR PPLI EXTENSION WORD

REFERENCE DFI/DUI	DATA FIELD DESCRIPTOR	BIT #		RESOLUTION, CODING, ETC
		POSITION	BITS	
1550 001	WORD FORMAT	0-	1 2	10
281 015	LATITUDE, 0.0013 MINUTE	2-	24 23	
282 015	LONGITUDE, 0.0013 MINUTE	25-	48 24	
756 001	SPARE (SP)	49	1	
371 015	COURSE	50-	58 9	
367 018	SPEED	59-	69 11	

FIELD CODING FOR J2.2E0

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
281	015	LATITUDE, 0.0013 MINUTE ----- 0 DEGREES +90/4,194,303 THROUGH +90 DEGREES NORTH NO STATEMENT -90 THROUGH -90/4,194,303 DEGREES SOUTH	0 1 THROUGH 4194303 4194304 4194305 THROUGH 8388607	THE PRECISION IS APPROXIMATELY 8 FEET. IN 90/4,194,303 DEGREE INCREMENTS.
282	015	LONGITUDE, 0.0013 MINUTE ----- 0 DEGREES +180/8,388,607 THROUGH +180 DEGREES EAST NO STATEMENT -180 THROUGH -180/8,388,607 DEGREES WEST	0 1 THROUGH 8388607 8388608 8388609 THROUGH 16777215	THE PRECISION IS APPROXIMATELY 8 FEET. IN 180/8,388,607 DEGREE INCREMENTS.
371	015	COURSE ----- 0 THROUGH 359 DEGREES ILLEGAL NO STATEMENT	0 THROUGH 359 360 THROUGH 510 511	INDICATES THE DIRECTION OF TRAVEL OF AN OBJECT IN DEGREES WITH RESPECT TO TRUE NORTH. IN 1 DEGREE INCREMENTS.
367	018	SPEED ----- 0 THROUGH 4092 DATA MILES PER HOUR NO STATEMENT	0 THROUGH 2046 2047	THE RATE OF CHANGE OF POSITION. EXPRESSES GROUND SPEED IN 2 DATA MILES PER HOUR INCREMENTS.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: AIR PPLI - AMPLIFICATION CONTINUATION WORD

:	49	48	47	46	45	44	43:	42	41	40	39	38	37:	36	35	34	33	32	31	30	29	28	27	26	25:				
:	AIR PLATFORM ACTIVITY							:	AIR PLATFORM							:	MODE III CODE												:
:								:								:													:
:	7							:	6							:	12												:

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50	:
:																					:
:	SPARE																				:
:																					:
:	20																				:

WORD DESCRIPTION

WORD NUMBER: J2.2C1

WORD TITLE: AIR PPLI - AMPLIFICATION CONTINUATION WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	00001
756 001	SPARE (SP)	7	1	
293 003	MODE I CODE	8-	12 5	
294 002	MODE II CODE	13-	24 12	
295 002	MODE III CODE	25-	36 12	
1797 001	AIR PLATFORM	37-	42 6	
1798 001	AIR PLATFORM ACTIVITY	43-	49 7	
756 020	SPARE	50-	69 20	

FIELD CODING FOR J2.2C1

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
293	003	MODE I CODE -----		PROVIDES MODE I BEACON REPLY INFORMATION. WITHIN THE MODE FIELD, SIF CODES ARE IN THE ORDER A4 A2 A1 B2 B1. THE LEAST SIGNIFICANT DIGIT CANNOT BE GREATER THAN 3. THIS CODE CANNOT BE ASSIGNED AS AN OPERATIONAL CODE. INDICATES THERE ARE NO DATA FOR TRANSMISSION.
		0 (NO STATEMENT)	00 (OCTAL)	
		1	01 (OCTAL)	
		2	02 (OCTAL)	
		3	03 (OCTAL)	
		4	10 (OCTAL)	
		5	11 (OCTAL)	
		6	12 (OCTAL)	
		7	13 (OCTAL)	
		8	20 (OCTAL)	
		9	21 (OCTAL)	
		10	22 (OCTAL)	
		11	23 (OCTAL)	
		12	30 (OCTAL)	
		13	31 (OCTAL)	
		14	32 (OCTAL)	
		15	33 (OCTAL)	
		16	40 (OCTAL)	
		17	41 (OCTAL)	
		18	42 (OCTAL)	
		19	43 (OCTAL)	
		20	50 (OCTAL)	
		21	51 (OCTAL)	
		22	52 (OCTAL)	
		23	53 (OCTAL)	
		24	60 (OCTAL)	
		25	61 (OCTAL)	
		26	62 (OCTAL)	
		27	63 (OCTAL)	
		28	70 (OCTAL)	
		29	71 (OCTAL)	
		30	72 (OCTAL)	
		31	73 (OCTAL)	
294	002	MODE II CODE -----		PROVIDES MODE II BEACON REPLY INFORMATION. THIS CODE CANNOT BE ASSIGNED AS AN OPERATIONAL CODE. INDICATES THERE
		NO STATEMENT	0	

FIELD CODING FOR J2.2C1

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
294	002	MODE II CODE -----	(CONTINUED)	
		1 THROUGH 7777 (OCTAL)	0001 THROUGH 7777 (OCTAL)	ARE NO DATA FOR TRANSMISSION. WITHIN THE FIELD, SIF CODES ARE IN THE ORDER A, B, C, D WITH EACH TRIAD IN THE ORDER 4, 2, 1.
295	002	MODE III CODE -----		PROVIDES MODE III BEACON REPLY INFORMATION.
		NO STATEMENT	0	THIS CODE CANNOT BE ASSIGNED AS AN OPERATIONAL CODE. INDICATES THERE ARE NO DATA FOR TRANSMISSION.
		1 THROUGH 7777 (OCTAL)	0001 THROUGH 7777 (OCTAL)	WITHIN THE FIELD, SIF CODES ARE IN THE ORDER A, B, C, D WITH EACH TRIAD IN THE ORDER 4, 2, 1.
1797	001	AIR PLATFORM -----		THE AIR PLATFORM FIELD ALONG WITH THE AIR PLATFORM ACTIVITY FIELD FURTHER DEFINES THE IDENTITY OF AN AIR TRACK.
		NO STATEMENT	0	
		FIGHTER	1	
		FIGHTER BOMBER	2	
		ATTACK	3	
		BOMBER	4	
		RECONNAISSANCE	5	
		TANKER	6	
		TANKER (BOOM ONLY)	7	
		TANKER (DROGUE ONLY)	8	
		INTERCEPTOR	9	
		TRANSPORT	10	
		AIRBORNE COMMAND POST (ACP)	11	
		MISSILE CARRIER	12	
		MISSILE	13	
		ELECTRONIC WARFARE (EW)	14	
		ANTISUBMARINE WARFARE (ASW)	15	
		AIRBORNE EARLY WARNING AND CONTROL (AEW)	16	
		MARITIME PATROL AIRCRAFT (MPA)	17	
		SEARCH AND RESCUE (SAR)	18	
		DRONE	19	

FIELD CODING FOR J2.2C1

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

1797	001	AIR PLATFORM	(CONTINUED)	
------	-----	--------------	-------------	--

		REMOTELY PILOTED VEHICLE (RPV)	20	
		FIXED WING GUNSHIP	21	
		CIVIL, AIRLINER	22	
		CIVIL, GENERAL	23	
		LIGHTER THAN AIR (LTA)	24	
		GLIDER	25	
		DECOY	26	
		HELICOPTER (HELO)	27	
		ATTACK HELICOPTER	28	
		HELICOPTER GUNSHIP	29	
		ANTISUBMARINE WARFARE	30	
		HELICOPTER (ASW HELO)		
		MINE WARFARE HELICOPTER	31	
		TRANSPORT HELICOPTER	32	
		TACTICAL SUPPORT	33	
		PATROL	34	
		MISCELLANEOUS FIXED WING	35	
		MISSILE CONTROL UNIT	36	
		SURFACE-TO-AIR MISSILE	37	
		(SAM)		
		AIR-TO-SURFACE MISSILE	38	
		(ASM)		
		SURFACE-TO-SURFACE	39	
		MISSILE (SSM)		
		LOGISTIC	40	
		AIR-TO-AIR MISSILE (AAM)	41	
		SUBSURFACE-TO-SURFACE	42	
		MISSILE		
		SURFACE-TO-SUBSURFACE	43	
		MISSILE		
		CRUISE MISSILE	44	
		BALLISTIC MISSILE	45	
		AIRBORNE LAND	46	
		SURVEILLANCE		
		AIRBORNE LASER	47	
		UNDEFINED	48 THROUGH 62	
		RESET TO NO STATEMENT	63	

1798	001	AIR PLATFORM ACTIVITY		
------	-----	-----------------------	--	--

THE AIR PLATFORM ACTIVITY FIELD
ALONG WITH THE AIR PLATFORM FIELD
FURTHER DEFINES THE IDENTITY OF AN
AIR TRACK.

5.1-334

MIL-STD-6016B

FIELD CODING FOR J2.2C1

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1798	001	AIR PLATFORM ACTIVITY	(CONTINUED)	

		NO STATEMENT	0	
		RECONNAISSANCE	1	
		OVER THE HORIZON	2	
		TARGETING (OTHT)		
		TRAINING	3	
		LOGISTICS SUPPORT	4	
		ANTISURFACE WARFARE	5	
		ELECTRONIC WARFARE (EW)	6	
		SURVEILLANCE	7	
		SEARCH AND RESCUE (SAR)	8	
		ESCORTING	9	
		MINELAYING	10	
		TRANSITING	11	
		SPECIAL WEAPONS ATTACK	12	
		INTRUDING	13	
		ELECTRONIC WARFARE	14	
		SUPPORT (ES)		
		COMMUNICATIONS RELAY	15	
		PATROL (OCEAN	16	
		SURVEILLANCE)		
		AIRLIFT (TRANSPORT)	17	
		ANTISUBMARINE WARFARE	18	
		(ASW)		
		SHADOWING/INTERVENING	19	
		TOWING	20	
		AIR ASSAULT	21	
		INTERCEPTION	22	
		ELECTRONIC ATTACK (EA)	23	
		POLICING	24	
		CONVENTIONAL ATTACK	25	
		MEDICAL EVACUATION	26	
		(MEDEVAC)		
		MINE COUNTERMEASURES	27	
		SEARCH	28	
		REFUELING/TANKING	29	
		INTERDICTION	30	
		COMBAT AIR PATROL (CAP)	31	
		FORWARD AIR CONTROLLER	32	
		(FAC)		
		VERY IMPORTANT PERSON	33	
		(VIP) FLIGHT		
		NONCOMBATANT OPERATIONS	34	
		CLOSE AIR SUPPORT (CAS)	35	

FIELD CODING FOR J2.2C1

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1798	001	AIR PLATFORM ACTIVITY	(CONTINUED)	

		AIRBORNE EARLY WARNING	36	
		(AEW)		
		GROUND ATTACK TACTICS	37	
		(GAT)		
		AIRBORNE COMMAND POST	38	
		(ACP)		
		RESCUE COMBAT AIR PATROL	39	
		(RESCAP)		
		SURFACE COMBAT AIR	40	
		PATROL (SUCAP)		
		TANKING	41	
		SPOTTING	42	
		STRIKE WARFARE	43	
		SPECIAL	44	
		HIJACK	45	
		JAMMER	46	
		TROOPLIFT	47	
		XRAY	48	
		ANTI-AIR WARFARE (AAW)	49	
		COMMAND AND CONTROL	50	
		COUNTER-AIR WARFARE	51	
		RETURN TO BASE (RTB)	52	
		MINE WARFARE	53	
		CHAFF LAYING	54	
		VIDEO DATA LINKING	55	
		(TARGETING)		
		DIPPING	56	
		RESCUE HELO	57	
		ORBITING	58	
		UNDER RECALL	59	
		ENGAGING	60	
		ENGAGING (PRIORITY KILL)	61	
		INVESTIGATING	62	
		CLEARED TO DROP	63	
		INTERVENING	64	
		DIVERTING	65	
		AIR-TO-GROUND	66	
		AIR-TO-AIR	67	
		PRECISION BOMBING	68	
		LASER DESIGNATION	69	
		BEACON BOMBING	70	
		SHADOWING	71	
				A METHOD OF PROVIDING REMOTE TARGETING DATA TO A FIRING PLATFORM/WEAPON.

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1798	001	AIR PLATFORM ACTIVITY	(CONTINUED)	

		COVERING	72	
		VISUAL IDENTIFICATION	73	
		HIGH ENERGY LASING	74	
		UNDEFINED	75 THROUGH 114	
		AIR ACTIVITY 1 THROUGH 12	115 THROUGH 126	A SPECIFIC AIR MISSION DEFINED BY THE JOINT OPERATIONAL COMMANDER.
		RESET TO NO STATEMENT	127	

.....

WORD TITLE: AIR PPLI - MISSION INFORMATION CONTINUATION WORD

49	48	47	46:	45	44	43	42	41	40	39	38	37	36	35	34	33:	32	31	30	29	28	27	26	25
			:	LINK 4A ADDRESS														:						
<---			:															:	--->					
			:															:						
			:	13														:						

: 69:	68:	67:	66:	65	64	63	62	61	60	59:	58	57	56	55	54	53	52	51	50	
: :	VFC:	ARI:	ARI:	:							:									
: SP :	IND:	CC :	VC :	CONTROL CHANNEL						:	VOICE FREQUENCY/CHANNEL									
: :	:	:	:	:							:									
: 1 :	1 :	1 :	1 :	:	7						:	13								

WORD DESCRIPTION

WORD NUMBER: J2.2C2

WORD TITLE: AIR PPLI - MISSION INFORMATION CONTINUATION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550 001		WORD FORMAT	0-	1 2	01
1551 001		CONTINUATION WORD LABEL	2-	6 5	00010
1717 001		VOICE CALL SIGN INDICATOR (VCS IND)	7	1	
1718 001		LINK 4A ADDRESS INDICATOR (L4A IND)	8	1	
264 001		VOICE CALL SIGN	9-	32 24	
291 001		LINK 4A ADDRESS	33-	45 13	
417 016		VOICE FREQUENCY/CHANNEL	46-	58 13	
348 006		CONTROL CHANNEL	59-	65 7	
1571 003		ACTIVE RELAY INDICATOR, VOICE CHANNEL (ARI VC)	66	1	
1571 004		ACTIVE RELAY INDICATOR, CONTROL CHANNEL (ARI CC)	67	1	
898 001		VOICE FREQUENCY/CHANNEL INDICATOR (VFC IND)	68	1	
756 001		SPARE (SP)	69	1	

FIELD CODING FOR J2.2C2

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1717	001	VOICE CALL SIGN INDICATOR -----		USED TO INDICATE WHETHER OR NOT THE VOICE CALL SIGN FIELD SHOULD BE INTERPRETED.
		DO NOT INTERPRET VOICE CALL SIGN	0	
		INTERPRET VOICE CALL SIGN	1	
1718	001	LINK 4A ADDRESS INDICATOR -----		USED TO INDICATE WHETHER OR NOT THE LINK 4A ADDRESS FIELD SHOULD BE INTERPRETED.
		DO NOT INTERPRET LINK 4A ADDRESS	0	
		INTERPRET LINK 4A ADDRESS	1	
264	001	VOICE CALL SIGN -----		AN ALPHANUMERICALLY-CODED CALL SIGN USED IN VOICE COMMUNICATIONS TO IDENTIFY A FORCE ELEMENT. THE 24 BITS ARE DIVIDED INTO FOUR GROUPS OF 6 BITS. EACH GROUP IS INTERPRETED INDEPENDENTLY IN ACCORDANCE WITH THE FOLLOWING CODE:
		BLANK	0	
		1	1	
		2	2	
		3	3	
		4	4	
		5	5	
		6	6	
		7	7	
		8	8	
		9	9	
		A	10	
		B	11	
		C	12	
		D	13	
		E	14	
		F	15	
		G	16	
		H	17	
		I	18	
		J	19	
		K	20	

FIELD CODING FOR J2.2C2

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
264	001	VOICE CALL SIGN -----	(CONTINUED)	
		L	21	
		M	22	
		N	23	
		O	24	
		P	25	
		Q	26	
		R	27	
		S	28	
		T	29	
		U	30	
		V	31	
		W	32	
		X	33	
		Y	34	
		Z	35	
		UNDEFINED	36 THROUGH 62	
		0 (ZERO)	63	
291	001	LINK 4A ADDRESS -----		THE ADDRESS OF A SPECIFIC AIRCRAFT ON TACTICAL DATA INFORMATION LINK LINK 4A.
		NUMERIC	00000 THROUGH 17777 (OCTAL)	
417	016	VOICE FREQUENCY/CHANNEL -----		IDENTIFIES A UHF VOICE RADIO CHANNEL NUMBER TO ACCOUNT FOR 7000 POSSIBLE RADIO FREQUENCIES IN THE 225 TO 400 MHZ BAND OR THE OPTION OF SELECTING CHANNEL GROUP A OR CHANNEL GROUP B.
		NO STATEMENT	0	
		UHF FREQUENCY	1 THROUGH 7000	THE BIT CODE IS RELATED TO THE UHF FREQUENCY BY USING THE FOLLOWING FORMULA: $\text{FREQ(MHZ)} = 225 + .025(N-1)$ WHERE N = BIT CODE NUMBER.
		ILLEGAL	7001 THROUGH 7039	
		CHANNEL GROUP A	7040 THROUGH 7167	128 CHANNELS FROM 0-127.
		CHANNEL GROUP B	7168 THROUGH 7295	128 CHANNELS FROM 0-127.
		ILLEGAL	7296 THROUGH 8191	
348	006	CONTROL CHANNEL -----		

5.1-341

MIL-STD-6016B

FIELD CODING FOR J2.2C2

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
348	006	CONTROL CHANNEL -----	(CONTINUED)	
		CONTROL CHANNEL NUMBER NO STATEMENT	0 THROUGH 126 127	
1571	003	ACTIVE RELAY INDICATOR, VOICE CHANNEL -----		INDICATES THE STATUS OF A UNIT'S RE- LAYING CAPABILITY OVER A VOICE CHANNEL.
		RELAYING FUNCTION INACTIVE	0	
		RELAYING FUNCTION ACTIVE	1	
1571	004	ACTIVE RELAY INDICATOR, CONTROL CHANNEL -----		INDICATES THE STATUS OF A UNIT'S RE- LAYING CAPABILITY OVER A CONTROL CHANNEL.
		RELAYING FUNCTION INACTIVE	0	
		RELAYING FUNCTION ACTIVE	1	
898	001	VOICE FREQUENCY/CHANNEL INDICATOR -----		INDICATES WHETHER THE VOICE FREQUENCY/CHANNEL IN THE MESSAGE IS THE PRIMARY OR THE ALTERNATE VOICE FREQUENCY/CHANNEL.
		PRIMARY VOICE FREQUENCY/ CHANNEL	0	THE VOICE FREQUENCY/CHANNEL IS THE PRIMARY VOICE FREQUENCY/CHANNEL.
		ALTERNATE VOICE FREQUENCY/CHANNEL	1	THE VOICE FREQUENCY/CHANNEL IS THE ALTERNATE VOICE FREQUENCY/CHANNEL.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J2.2C3

WORD TITLE: AIR PPLI - RELATIVE NAVIGATION CONTINUATION WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00	:				
U COORDINATE																:	:	CONTINUATION WORD				:	WORD	:					
																:	SP	:	LABEL				:	FORMAT	:				
																:	:					:	:	:					
20																:	1	:	5				:	2	:				
49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25	:				
<---		:	V COORDINATE																			:	---		>				
		:																				:							
		:	20																			:							
					:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50				
					:	RELATIVE		:	RELATIVE		:														BETA ANGLE				
					:	AZIMUTH		:	POSITION		:																		
					:	QUALITY		:	QUALITY		:																		
					:	3		:	4		:	15																	

WORD DESCRIPTION

WORD NUMBER: J2.2C3

WORD TITLE: AIR PPLI - RELATIVE NAVIGATION CONTINUATION WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	00011
756 001	SPARE (SP)	7	1	
276 001	U COORDINATE	8-	27 20	
277 001	V COORDINATE	28-	47 20	
284 001	BETA ANGLE	48-	62 15	
278 001	RELATIVE POSITION QUALITY	63-	66 4	
285 001	RELATIVE AZIMUTH QUALITY	67-	69 3	

FIELD CODING FOR J2.2C3

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
276	001	U COORDINATE -----		THE EAST WEST COMPONENT OF POSITION MEASURED IN A U, V CARTESIAN COOR- DINATE SYSTEM WHERE THE U,V PLANE IS TANGENT TO THE EARTH AT ITS ORIGIN. POSITIONS EAST OF THE ORIGIN ARE POSITIVE. POSITIONS WEST OF THE ORIGIN ARE NEGATIVE. IN 1/512 DATA MILE INCREMENTS.
		0 DATA MILES	0	
		+1/512 THROUGH	1 THROUGH 524287	
		+1023 511/512 DATA MILES		
		NO STATEMENT	524288	
		-1023 511/512 THROUGH	524289 THROUGH 1048575	
		-1/512 DATA MILES		
277	001	V COORDINATE -----		THE NORTH SOUTH COMPONENT OF POSI- TION MEASURED IN A U,V CARTESIAN COORDINATE SYSTEM WHERE THE U,V PLANE IS TANGENT TO THE EARTH AT ITS ORIGIN. POSITIONS NORTH OF THE ORIGIN ARE POSITIVE. POSI- TIONS SOUTH OF THE ORIGIN ARE NEGATIVE. IN 1/512 DATA MILE INCREMENTS.
		0 DATA MILES	0	
		+1/512 THROUGH	1 THROUGH 524287	
		+1023 511/512 DATA MILES		
		NO STATEMENT	524288	
		-1023 511/512 THROUGH	524289 THROUGH 1048575	
		-1/512 DATA MILES		
284	001	BETA ANGLE -----		THE ORIENTATION OF THE U,V TANGENT PLANE WITH RESPECT TO TRUE NORTH, I.E., THE ANGLE FORMED BY THE V-AXIS AND TRUE NORTH. COUNTER- CLOCKWISE DISPLACEMENT OF THE V-AXIS IS STATED AS A POSITIVE ANGLE, CLOCKWISE AS A NEGATIVE ANGLE. IN 0.0125 MILLIRADIAN INCREMENTS.
		0 MILLIRADIANS	0	
		+0.0125 THROUGH +204.8 MILLIRADIANS	1 THROUGH 16383	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

284	001	BETA ANGLE	(CONTINUED)

		NO STATEMENT	16384
		-204.8 THROUGH -0.0125	16385 THROUGH 32767
		MILLIRADIANS	

278 001 RELATIVE POSITION QUALITY

INDICATES THE LEVEL OF RELATIVE POSITION UNCERTAINTY IN THE U,V TANGENT PLANE AS ESTIMATED BY THE TERMINAL RELATIVE NAVIGATION FUNCTION. THE QUALITY IS STATED AS A NUMERICAL VALUE FROM 0 TO 15 WHERE THE HIGHER VALUES INDICATE THE HIGHER LEVELS OF QUALITY.

>18080 FEET	0
< OR = 18080 FEET	1
< OR = 9040 FEET	2
< OR = 4520 FEET	3
< OR = 2260 FEET	4
< OR = 1600 FEET	5
< OR = 1130 FEET	6
< OR = 800 FEET	7
< OR = 565 FEET	8
< OR = 400 FEET	9
< OR = 282 FEET	10
< OR = 200 FEET	11
< OR = 141 FEET	12
< OR = 100 FEET	13
< OR = 71 FEET	14
NAVIGATION CONTROLLER	15

REFERENCE SOURCE FOR NAVIGATION.

285 001 RELATIVE AZIMUTH QUALITY

THE QUALITY IS STATED AS A NUMERICAL
VALUE FROM 0 TO 7 WHERE THE HIGHER
VALUES INDICATE THE HIGHER LEVELS
OF QUALITY.

>64 MILLIRADIANS	0
< OR = 64 MILLIRADIANS	1
< OR = 32 MILLIRADIANS	2
< OR = 16 MILLIRADIANS	3
< OR = 8 MILLIRADIANS	4
< OR = 4 MILLIRADIANS	5
< OR = 2 MILLIRADIANS	6
< OR = 1 MILLIRADIAN	7

.....

WORD TITLE: AIR PPLI - ADDITIONAL MISSION CORRELATORS CONTINUATION WORD

49	48	47:	46:	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31:	30	29:	28	27	26	25				
<---			:	:	TRACK NUMBER, MISSION COMMANDER															:	SP	:	WINGMAN IDENTIFICATION LETTER/NUMBER					
			:	1	:	15															:	2	:	6				

:	69	68	67	66	65	64	63	62:	61	60	59	58	57	56	55	54	53	52	51	50	
:									:	TRACK NUMBER, FLIGHT LEAD											
:	SPARE								:												
:									:												
:									:												
:	8								:	15											

WORD DESCRIPTION

WORD NUMBER: J2.2C5

WORD TITLE: AIR PPLI - ADDITIONAL MISSION CORRELATORS CONTINUATION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550 001		WORD FORMAT	0-	1 2	01
1551 001		CONTINUATION WORD LABEL	2-	6 5	00101
348 003		NET NUMBER, NONC2 JU-T0-NONC2	7-	13 7	
		JU NPG B			
1625 013		NONC2 JU-T0-NONC2 JU NPG	14	1	
		STATUS B (NON STS B)			
725 003		MISSION CORRELATOR	15-	22 8	
731 001		WINGMAN IDENTIFICATION LETTER/	23-	28 6	
		NUMBER			
756 002		SPARE (SP)	29-	30 2	
769 041		TRACK NUMBER, MISSION	31-	45 15	
		COMMANDER			
756 001		SPARE (SP)	46	1	
769 039		TRACK NUMBER, FLIGHT LEAD	47-	61 15	
756 008		SPARE	62-	69 8	

FIELD CODING FOR J2.2C5

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
348	003	NET NUMBER, NONC2 JU-TO-NONC2 JU NPG B ----- NUMERIC NO STATEMENT	0 THROUGH 126 127	INDICATES THE SECONDARY NONC2 JU-TO- NONC2 JU NPG NET NUMBER ON WHICH THE SOURCE TN IS ASSIGNED TO OPERATE. ASSIGNED NPG NET NUMBER.
1625	013	NONC2 JU-TO-NONC2 JU NPG STATUS B ----- ACTIVE INACTIVE	0 1	INDICATES NPG STATUS WHEN THE SOURCE TN IS OPERATING ON THE SECONDARY LINK 16 NONC2 JU-TO-NONC2 JU NPG. APPLIES ONLY WHEN NONC2 JU-TO- NONC2 JU NPG NET NUMBER IS SET TO VALUE 0-126.
725	003	MISSION CORRELATOR ----- NO STATEMENT NUMERIC	0 1 THROUGH 255	SPECIFIES THE IDENTIFYING NUMBER ASSIGNED TO AN OVERALL MISSION. THIS ENABLES PARTICIPANTS WITH DIFFERENT OBJECTIVES ON SPECIFIC MISSIONS TO BE ASSOCIATED WITH THE SAME OVERALL MISSION.
731	001	WINGMAN IDENTIFICATION LETTER/ NUMBER ----- NO STATEMENT WINGMAN ID LETTER WINGMAN ID NUMBER UNDEFINED	0 1 THROUGH 26 27 THROUGH 35 36 THROUGH 63	A LETTER/NUMBER ASSIGNED TO A SPECIFIC NONC2 JU. LETTERS A THROUGH Z. NUMBERS 1 THROUGH 9.
769	041	TRACK NUMBER, MISSION COMMANDER ----- NO STATEMENT NUMERIC ILLEGAL NUMERIC NUMERIC	0 00001 THROUGH 00076 (OCTAL) 00077 (OCTAL) 00100 THROUGH 00175 (OCTAL) 00176 (OCTAL)	THE TN OF THE COMMANDER OF A MISSION THAT THE MESSAGE ORIGINATOR IS A MEMBER OF. THIS TN MAY BE OWN UNIT TN. ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU). ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU). RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.

FIELD CODING FOR J2.2C5

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	041	TRACK NUMBER, MISSION COMMANDER -----	(CONTINUED)	
		NUMERIC NUMERIC	00177 (OCTAL) 00200 THROUGH 07776 (OCTAL)	COLLECTIVE ADDRESS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL NUMERIC	07777 (OCTAL) 10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
769	039	TRACK NUMBER, FLIGHT LEAD -----		THE TN OF THE FLIGHT LEADER OF THE FLIGHT THAT THE MESSAGE ORIGINATOR IS A MEMBER OF. THIS TN MAY BE OWN UNIT TN.
		NO STATEMENT NUMERIC	0 00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		ILLEGAL NUMERIC	00077 (OCTAL) 00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC NUMERIC	00177 (OCTAL) 00200 THROUGH 07776 (OCTAL)	COLLECTIVE ADDRESS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL NUMERIC	07777 (OCTAL) 10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.

5.1-351

MIL-STD-6016B

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

J2.3 MESSAGE SUMMARY

PURPOSE

The J2.3 Surface (Maritime) PPLI message is used to provide all JUs information about surface (maritime) JUs on the Link 16 network. It is used by surface (maritime) JUs to provide network participation status, identification, positional information, and relative navigation information.

DATA ELEMENT SUMMARY

<u>J2.3I</u>		<u>J2.3C1 (Continued)</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	MODE III CODE	12
LABEL, J-SERIES	5	SURFACE (MARITIME) PLATFORM	6
SUBLABEL, J-SERIES	3	SURFACE (MARITIME) PLATFORM	7
MESSAGE LENGTH INDICATOR	3	ACTIVITY	
EXERCISE INDICATOR	1	SPARE	20
SPARE	1		
FORCE TELL INDICATOR	1	<u>J2.3C2</u>	
EMERGENCY INDICATOR	1	DATA ELEMENT	# BITS
COMMAND AND CONTROL INDICATOR	1	WORD FORMAT	2
SIMULATION INDICATOR	1	CONTINUATION WORD LABEL	5
SPARE	2	VOICE CALL SIGN INDICATOR	1
ACTIVE RELAY INDICATOR, WIDE	1	LINK 4A ADDRESS INDICATOR	1
AREA NETWORK		VOICE CALL SIGN	24
RTT REPLY STATUS INDICATOR	1	LINK 4A ADDRESS	13
NETWORK PARTICIPATION STATUS	4	VOICE FREQUENCY/CHANNEL	13
INDICATOR		CONTROL CHANNEL	7
TIME QUALITY	4	ACTIVE RELAY INDICATOR, VOICE	1
GEODETIC POSITION QUALITY	4	CHANNEL	
STRENGTH	4	ACTIVE RELAY INDICATOR,	1
SPARE	1	CONTROL CHANNEL	
ELEVATION, 25 FT	11	VOICE FREQUENCY/CHANNEL	1
SPARE	2	INDICATOR	
MISSION CORRELATOR	8	SPARE	1
ELEVATION QUALITY	4		
SPARE	5	<u>J2.3C3</u>	
<u>J2.3E0</u>		DATA ELEMENT	# BITS
DATA ELEMENT	# BITS	WORD FORMAT	2
WORD FORMAT	2	CONTINUATION WORD LABEL	5
LATITUDE, 0.0013 MINUTE	23	SPARE	1
LONGITUDE, 0.0013 MINUTE	24	U COORDINATE	20
SPARE	1	V COORDINATE	20
COURSE	9	BETA ANGLE	15
SPEED	11	RELATIVE POSITION QUALITY	4
		RELATIVE AZIMUTH QUALITY	3
<u>J2.3C1</u>			
DATA ELEMENT	# BITS		
WORD FORMAT	2		
CONTINUATION WORD LABEL	5		
SPARE	1		
MODE I CODE	5		
MODE II CODE	12		

MIL-STD-6016B

J2.3 TRANSMIT/RECEIVE RULES

TITLE: Surface (Maritime) PPLI Message

TRANSMIT RULES

1. The J2.3B Surface (Maritime) PPLI basic message consists of the J2.3I Surface (Maritime) PPLI initial word and the J2.3E0 Surface (Maritime) PPLI extension word. The J2.3B basic message shall be transmitted periodically at a RRN = 6 (12 seconds, 8-20 second interval) or, when specified, at the access rate in the time slot assignment by surface (maritime) JUs when their terminals are operating in the Normal Mode and the Network Participation Status Indicator field is set to one of the following:

- a. Active.
- b. No J0.0 Message Being Received.
- c. High Error Rate.
- d. Tactical Data System (TDS) Failure.

2. Applicable continuation words shall be transmitted in a J2.3I/J2.3E0/J2.3CX word sequence. Only one continuation word shall follow the extension word when only three words are allowed in any one time slot.

3. When the JU is assigned to transmit in the joint PPLI network PG or is neither an active voice relay or active control relay and assigned to transmit in the PPLI A or PPLI B network PG, it shall transmit in each assigned PG a J2.3I/J2.3E0/J2.3C3 word sequence in every second time slot in which a J2.3B message is scheduled for transmission. The intervening transmissions shall be a J2.3I/J2.3E0/J2.3CX word sequence with the sequence of J2.3CX words in the following order:

- a. J2.3C1 Surface (Maritime) PPLI - Amplification continuation word.
- b. J2.3C2 Surface (Maritime) PPLI - Mission Information continuation word.

J2.3 TRANSMIT/RECEIVE RULES (Continued)

TRANSMIT RULES (Continued)

4. When the JU is either an active voice relay or active control relay and assigned to transmit in either the PPLI A or PPLI B network PG it shall transmit in both PGs a J2.3I/J2.3E0/J2.3C2 word sequence in every second time slot in which a J2.3B message is scheduled for transmission. The intervening transmissions shall be a J2.3I/J2.3E0/J2.3CX word sequence with the sequence of J2.3CX words in the following order:

a. J2.3C1 Surface (Maritime) PPLI - Amplification continuation word.

b. J2.3C3 Surface (Maritime) PPLI - Relative Navigation continuation word.

5. When data within a J2.3C1, J2.3C2, or J2.3C3 word change and only three words are allowed in a time slot, a J2.3I/J2.3E0/J2.3CX word sequence shall replace the next Surface (Maritime) PPLI message in the sequence except that a J2.3I/J2.3E0/J2.3C2 word sequence shall not be replaced if the JU is an active voice or active control relay. If more than three words can be transmitted in a time slot, a J2.3I/J2.3E0/J2.3CX/J2.3CX/J2.3CX/ J2.3CX/etc. word sequence shall be transmitted according to transmit rules 3 and 4 above except that no continuation word shall be repeated in the same time slot.

If any of the continuation words having changed data cannot be transmitted in the next time slot because of the number of transmissions allowed in the time slot, transmission shall occur such that the J2.3C2 word has the first priority, the J2.3C3 word has the second priority, and the J2.3C1 word has the third priority.

6. If no data is available for a continuation word then that continuation word shall be deleted from the sequence and the next continuation word in the sequence transmitted. If no data exists for all continuation words, the J2.3B message shall be transmitted.

7. A J2.3I/J2.3E0/J2.3C3 word sequence shall be transmitted with the Network Participation Status Indicator field set to the appropriate condition prior

J2.3 TRANSMIT/RECEIVE RULES (Continued)

TRANSMIT RULES (Continued)

to the terminal taking the action described (Radio Silence, Polling, Inactive) or in the next transmission opportunity after the condition occurs (High Error Rate, No J0.0 Message Being Received, TDS Failure).

8. A J2.3B basic message shall be transmitted in response to a J0.6 Communications Control message in the time slot provided. If the terminal is in the Polling Mode, the RTT Reply Status Indicator field shall be set to not operational.

RECEIVE RULES

All received nonsimulated (Simulation Indicator = 0) and nonrelayed (Relayed Transmission Indicator = 0) J2.3 messages shall be processed in accordance with the requirements for terminal synchronization and relative navigation.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: SURFACE (MARITIME) PPLI INITIAL WORD

	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00		
<---	:	:	ARI	:	:	SIM	C2	EMG	FT	:	:	EX	:	MESSAGE	:	SUBLABEL,	:	:	:	:	:	:	:	WORD	:		
	:	RRS	WAN	:	SP	:	IND	IND	IND	IND	SP	:	IND	:	LENGTH	:	J-SERIES	:	:	:	:	:	:	FORMAT	:		
	:	:	:	:	:	:	:	:	:	:	:	:	:	INDICATOR	:	:	:	:	:	:	:	:	:	:	:		
	:	1	:	1	:	2	:	1	:	1	:	1	:	1	:	1	:	3	:	3	:	:	:	5	:	2	:

49	48	47	46	45	44	43	42	41	40:	39:	38	37	36	35:	34	33	32	31:	30	29	28	27:	26	25		
ELEVATION, 25 FT									:	:	STRENGTH				:	GEODETIC POSITION QUALITY		:	TIME QUALITY				:	NPS IND		
11									:	1	:	4				:	4		:	4				:	4	

:	69	68	67	66	65:	64	63	62	61:	60	59	58	57	56	55	54	53:	52	51:	50
:						:	ELEVATION	:									:		:	
:	SPARE					:	QUALITY	:	MISSION CORRELATOR								:	SP	:--->	
:						:		:									:		:	
:	5					:	4			:	8						:	2		:

WORD DESCRIPTION

WORD NUMBER: J2.3I

WORD TITLE: SURFACE (MARITIME) PPLI INITIAL WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	00
270	004	LABEL, J-SERIES	2-	6 5	00010
271	005	SUBLABEL, J-SERIES	7-	9 3	011
800	001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
385	003	EXERCISE INDICATOR (EX IND)	13	1	
756	001	SPARE (SP)	14	1	
354	002	FORCE TELL INDICATOR (FT IND)	15	1	
355	002	EMERGENCY INDICATOR (EMG IND)	16	1	
893	001	COMMAND AND CONTROL INDICATOR (C2 IND)	17	1	
1604	001	SIMULATION INDICATOR (SIM IND)	18	1	
756	002	SPARE (SP)	19-	20 2	
1571	002	ACTIVE RELAY INDICATOR, WIDE AREA NETWORK (ARI WAN)	21	1	
274	001	RTT REPLY STATUS INDICATOR (RRS)	22	1	
1613	001	NETWORK PARTICIPATION STATUS INDICATOR (NPS IND)	23-	26 4	
279	001	TIME QUALITY	27-	30 4	
283	001	GEODETIC POSITION QUALITY	31-	34 4	
386	013	STRENGTH	35-	38 4	
756	001	SPARE (SP)	39	1	
1612	001	ELEVATION, 25 FT	40-	50 11	ELEVATION OF THE JTIDS ANTENNA.
756	002	SPARE (SP)	51-	52 2	
725	003	MISSION CORRELATOR	53-	60 8	
283	003	ELEVATION QUALITY	61-	64 4	
756	005	SPARE	65-	69 5	

FIELD CODING FOR J2.3I

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
385	003	EXERCISE INDICATOR ----- NON-EXERCISE TRACK EXERCISE TRACK OR UNIT	0 1	INDICATES WHETHER OR NOT THE MESSAGE IDENTIFIES AN EXERCISE TRACK.
354	002	FORCE TELL INDICATOR ----- NO STATEMENT FORCE TELL STATUS	0 1	THIS INDICATOR CAUSES TRACK/POINT DATA TO BE FORCED THROUGH CONTROLLABLE RECEIVE FILTERS.
355	002	EMERGENCY INDICATOR ----- NO STATEMENT EMERGENCY STATUS	0 1	USED TO INDICATE WHETHER OR NOT A UNIT OR TRACK HAS AN EMERGENCY.
893	001	COMMAND AND CONTROL INDICATOR ----- NONC2 UNIT C2 UNIT	0 1	THIS INDICATOR ALLOWS A JU TO IDENTIFY ITSELF AS A NONC2 OR C2 UNIT. THE UNIT BEING REPORTED IS A NONC2 UNIT. THE UNIT BEING REPORTED IS A C2 UNIT.
1604	001	SIMULATION INDICATOR ----- REAL TRACK OR UNIT SIMULATED TRACK OR UNIT	0 1	INDICATES WHETHER THE TRACK REFER- ENCED IN THE MESSAGE IS A REAL OR A SIMULATED TRACK.
1571	002	ACTIVE RELAY INDICATOR, WIDE AREA NETWORK ----- RELAYING FUNCTION INACTIVE RELAYING FUNCTION ACTIVE	0 1	INDICATES THE STATUS OF A UNIT'S RE- LAYING CAPABILITY OVER THE WIDE- AREA NETWORK.
274	001	RTT REPLY STATUS INDICATOR ----- RTT REPLY FUNCTION NORMAL RTT REPLY FUNCTION NOT OPERATIONAL	0 1	CONVEYS THE STATUS OF A TERMINAL'S RTT REPLY FUNCTION.

FIELD CODING FOR J2.3I

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1613	001	NETWORK PARTICIPATION STATUS INDICATOR -----		INDICATES TO WHAT DEGREE A UNIT IS PARTICIPATING ON THE INTERFACE.
		NO STATEMENT	0	
		ACTIVE-NON SPECIFIC	1	
		INACTIVE-NON SPECIFIC	2	
		CONDITIONAL RADIO	3	
		SILENCE		
		HIGH ERROR RATE	4	
		NO J0.0 MESSAGE BEING RECEIVED	5	
		TACTICAL DATA SYSTEM	6	
		FAILURE		
		POLLING	7	
		UNDEFINED	8 THROUGH 15	
279	001	TIME QUALITY -----		THE QUALITY IS STATED AS A NUMERICAL VALUE FROM 0 TO 15 WHERE THE HIGHER VALUES INDICATE THE HIGHER QUALITIES. QUALITY 0 IS NOT TO BE USED FOR SYNCHRONIZATION OR THE RELATIVE NAVIGATION FUNCTION.
		> 18080 NANOSECONDS	0	
		< OR = 18080 NANOSECONDS	1	
		< OR = 9040 NANOSECONDS	2	
		< OR = 4520 NANOSECONDS	3	
		< OR = 2260 NANOSECONDS	4	
		< OR = 1600 NANOSECONDS	5	
		< OR = 1130 NANOSECONDS	6	
		< OR = 800 NANOSECONDS	7	
		< OR = 565 NANOSECONDS	8	
		< OR = 400 NANOSECONDS	9	
		< OR = 282 NANOSECONDS	10	
		< OR = 200 NANOSECONDS	11	
		< OR = 141 NANOSECONDS	12	
		< OR = 100 NANOSECONDS	13	
		< OR = 71 NANOSECONDS	14	
		NET TIME REFERENCE	15	
283	001	GEODETIC POSITION QUALITY -----		THE LEVEL OF GEODETIC POSITION UNCERTAINTY AS ESTIMATED BY THE TERMINAL NAVIGATION FUNCTION.
		>18080 FT	0	
		< OR = TO 18080 FT	1	
		< OR = TO 9040 FT	2	

FIELD CODING FOR J2.3I

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
283	001	GEODETIC POSITION QUALITY -----	(CONTINUED)	
		< OR = TO 4520 FT	3	
		< OR = TO 2260 FT	4	
		< OR = TO 1600 FT	5	
		< OR = TO 1130 FT	6	
		< OR = TO 800 FT	7	
		< OR = TO 565 FT	8	
		< OR = TO 400 FT	9	
		< OR = TO 282 FT	10	
		< OR = TO 200 FT	11	
		< OR = TO 141 FT	12	
		< OR = TO 100 FT	13	
		< OR = TO 71 FT	14	
		< OR = TO 50 FT	15	
386	013	STRENGTH -----		EXPRESSES THE NUMBER OF ENTITIES REPRESENTED BY A SINGLE TRACK.
		NO STATEMENT	0	
		1 UNIT	1	
		2 UNITS	2	
		3 UNITS	3	
		4 UNITS	4	
		5 UNITS	5	
		6 UNITS	6	
		7 UNITS	7	
		8 UNITS	8	
		9 UNITS	9	
		10 UNITS	10	
		11 UNITS	11	
		12 UNITS	12	
		2 THROUGH 7 (FEW) UNITS	13	
		GREATER THAN 7 (MANY) UNITS	14	
		GREATER THAN 12 UNITS	15	
1612	001	ELEVATION, 25 FT -----		THE ELEVATION IN FEET OF AN OBJECT OR POINT AS MEASURED OUTWARD FROM THE EARTH AS A POSITIVE QUANTITY ABOVE MEAN SEA LEVEL (MSL). IN 25 FOOT INCREMENTS.
		0 THROUGH 51,150 FEET	0 THROUGH 2046	
		ELEVATION UNKNOWN	2047	
725	003	MISSION CORRELATOR -----		SPECIFIES THE IDENTIFYING NUMBER ASSIGNED TO AN OVERALL MISSION.

FIELD CODING FOR J2.3I

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
725	003	MISSION CORRELATOR -----	(CONTINUED)	
		NO STATEMENT NUMERIC	0 1 THROUGH 255	THIS ENABLES PARTICIPANTS WITH DIFFERENT OBJECTIVES ON SPECIFIC MISSIONS TO BE ASSOCIATED WITH THE SAME OVERALL MISSION.
283	003	ELEVATION QUALITY -----		THE LEVEL OF HEIGHT UNCERTAINTY AS ESTIMATED BY THE TERMINAL NAVIGATION FUNCTION.
		>18080 FT	0	
		< OR = TO 18080 FT	1	
		< OR = TO 9040 FT	2	
		< OR = TO 4520 FT	3	
		< OR = TO 2260 FT	4	
		< OR = TO 1600 FT	5	
		< OR = TO 1130 FT	6	
		< OR = TO 800 FT	7	
		< OR = TO 565 FT	8	
		< OR = TO 400 FT	9	
		< OR = TO 282 FT	10	
		< OR = TO 200 FT	11	
		< OR = TO 141 FT	12	
		< OR = TO 100 FT	13	
		< OR = TO 71 FT	14	
		< OR = TO 50 FT	15	

.....

WORD TITLE: SURFACE (MARITIME) PPLI EXTENSION WORD

: 49:	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25:
: SP :	LONGITUDE, 0.0013 MINUTE																						:	
: 1 :	24																						:	

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50	:		
:												:											:
:	SPEED											:	COURSE										:
:												:											:
:	11											:	9										:

WORD DESCRIPTION

WORD NUMBER: J2.3E0
WORD TITLE: SURFACE (MARITIME) PPLI EXTENSION WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	10
281 015	LATITUDE, 0.0013 MINUTE	2-	24 23	
282 015	LONGITUDE, 0.0013 MINUTE	25-	48 24	
756 001	SPARE (SP)	49	1	
371 015	COURSE	50-	58 9	
367 018	SPEED	59-	69 11	

FIELD CODING FOR J2.3E0

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
281	015	LATITUDE, 0.0013 MINUTE -----		THE PRECISION IS APPROXIMATELY 8 FEET. IN 90/4,194,303 DEGREE INCREMENTS.
		0 DEGREES	0	
		+90/4,194,303 THROUGH	1 THROUGH 4194303	
		+90 DEGREES NORTH		
		NO STATEMENT	4194304	
		-90 THROUGH	4194305 THROUGH 8388607	
		-90/4,194,303 DEGREES SOUTH		
282	015	LONGITUDE, 0.0013 MINUTE -----		THE PRECISION IS APPROXIMATELY 8 FEET. IN 180/8,388,607 DEGREE INCREMENTS.
		0 DEGREES	0	
		+180/8,388,607 THROUGH	1 THROUGH 8388607	
		+180 DEGREES EAST		
		NO STATEMENT	8388608	
		-180 THROUGH	8388609 THROUGH 16777215	
		-180/8,388,607 DEGREES WEST		
371	015	COURSE -----		INDICATES THE DIRECTION OF TRAVEL OF AN OBJECT IN DEGREES WITH RESPECT TO TRUE NORTH. IN 1 DEGREE INCREMENTS.
		0 THROUGH 359 DEGREES	0 THROUGH 359	
		ILLEGAL	360 THROUGH 510	
		NO STATEMENT	511	
367	018	SPEED -----		THE RATE OF CHANGE OF POSITION.
		0 THROUGH 4092 DATA	0 THROUGH 2046	EXPRESSES GROUND SPEED IN 2 DATA
		MILES PER HOUR		MILES PER HOUR INCREMENTS.
		NO STATEMENT	2047	

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: SURFACE (MARITIME) PPLI - AMPLIFICATION CONTINUATION WORD

:	24	23	22	21	20	19	18	17	16	15	14	13	:	12	11	10	09	08	:	07	:	06	05	04	03	02	:	01	00	:
:													:						:	:	CONTINUATION WORD					:	WORD	:		
:	MODE II CODE												:	MODE I CODE					:	SP	:	LABEL					:	FORMAT	:	
:													:						:	:						:	:	:		
:	12												:	5					:	1	:	5					:	2	:	

:	49	48	47	46	45	44	43:	42	41	40	39	38	37:	36	35	34	33	32	31	30	29	28	27	26	25:
:	SURFACE (MARITIME) PLATFORM:							SURFACE (MARITIME) :							MODE III CODE :										
:	ACTIVITY :							PLATFORM :																	
:																									
:	7 :							6 :							12 :										

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50	:
:																					:
:	SPARE																				:
:																					:
:	20																				:

WORD DESCRIPTION

WORD NUMBER: J2.3C1

WORD TITLE: SURFACE (MARITIME) PPLI - AMPLIFICATION CONTINUATION WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	00001
756 001	SPARE (SP)	7	1	
293 003	MODE I CODE	8-	12 5	
294 002	MODE II CODE	13-	24 12	
295 002	MODE III CODE	25-	36 12	
1797 002	SURFACE (MARITIME) PLATFORM	37-	42 6	
1798 002	SURFACE (MARITIME) PLATFORM	43-	49 7	
	ACTIVITY			
756 020	SPARE	50-	69 20	

FIELD CODING FOR J2.3C1

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
293	003	MODE I CODE -----		PROVIDES MODE I BEACON REPLY INFORMATION. WITHIN THE MODE FIELD, SIF CODES ARE IN THE ORDER A4 A2 A1 B2 B1. THE LEAST SIGNIFICANT DIGIT CANNOT BE GREATER THAN 3. THIS CODE CANNOT BE ASSIGNED AS AN OPERATIONAL CODE. INDICATES THERE ARE NO DATA FOR TRANSMISSION.
		0 (NO STATEMENT)	00 (OCTAL)	
		1	01 (OCTAL)	
		2	02 (OCTAL)	
		3	03 (OCTAL)	
		4	10 (OCTAL)	
		5	11 (OCTAL)	
		6	12 (OCTAL)	
		7	13 (OCTAL)	
		8	20 (OCTAL)	
		9	21 (OCTAL)	
		10	22 (OCTAL)	
		11	23 (OCTAL)	
		12	30 (OCTAL)	
		13	31 (OCTAL)	
		14	32 (OCTAL)	
		15	33 (OCTAL)	
		16	40 (OCTAL)	
		17	41 (OCTAL)	
		18	42 (OCTAL)	
		19	43 (OCTAL)	
		20	50 (OCTAL)	
		21	51 (OCTAL)	
		22	52 (OCTAL)	
		23	53 (OCTAL)	
		24	60 (OCTAL)	
		25	61 (OCTAL)	
		26	62 (OCTAL)	
		27	63 (OCTAL)	
		28	70 (OCTAL)	
		29	71 (OCTAL)	
		30	72 (OCTAL)	
		31	73 (OCTAL)	
294	002	MODE II CODE -----		PROVIDES MODE II BEACON REPLY INFORMATION. THIS CODE CANNOT BE ASSIGNED AS AN OPERATIONAL CODE. INDICATES THERE
		NO STATEMENT	0	

FIELD CODING FOR J2.3C1

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
294	002	MODE II CODE -----	(CONTINUED)	
		1 THROUGH 7777 (OCTAL)	0001 THROUGH 7777 (OCTAL)	ARE NO DATA FOR TRANSMISSION. WITHIN THE FIELD, SIF CODES ARE IN THE ORDER A, B, C, D WITH EACH TRIAD IN THE ORDER 4, 2, 1.
295	002	MODE III CODE -----		PROVIDES MODE III BEACON REPLY INFORMATION.
		NO STATEMENT	0	THIS CODE CANNOT BE ASSIGNED AS AN OPERATIONAL CODE. INDICATES THERE ARE NO DATA FOR TRANSMISSION.
		1 THROUGH 7777 (OCTAL)	0001 THROUGH 7777 (OCTAL)	WITHIN THE FIELD, SIF CODES ARE IN THE ORDER A, B, C, D WITH EACH TRIAD IN THE ORDER 4, 2, 1.
1797	002	SURFACE (MARITIME) PLATFORM -----		THE SURFACE (MARITIME) PLATFORM FIELD ALONG WITH THE SURFACE (MAR- ITIME) PLATFORM ACTIVITY FIELD FURTHER DEFINES THE IDENTITY OF A SURFACE (MARITIME) TRACK.
		NO STATEMENT	0	
		AIRCRAFT CARRIER (CV)	1	
		BATTLESHIP	2	
		CRUISER	3	
		DESTROYER	4	
		FRIGATE	5	
		FAST PATROL BOAT	6	
		AMPHIBIOUS	7	
		LHA/LHD	8	
		AMPHIBIOUS ASSAULT	9	
		COMMAND SHIP (LCC)		
		LANDING CRAFT (LC)	10	
		TROOP SHIP	11	
		TANKER/OILER	12	
		AUXILIARY SHIP	13	
		MINE WARFARE SHIP	14	
		MINE COUNTERMEASURES	15	
		MARITIME VESSEL (MCMV)		
		HOSPITAL SHIP	16	
		SURFACED SUBMARINE	17	
		HYDROFOIL	18	
		AIR CUSHION VEHICLE	19	
		INTELLIGENCE COLLECTOR	20	
		SURVEY VESSEL	21	

FIELD CODING FOR J2.3C1

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1797	002	SURFACE (MARITIME) PLATFORM -----	(CONTINUED)	
		NON-MILITARY	22	
		LANDING PLATFORM	23	
		LANDING SHIP	24	
		COMMAND	25	
		OCEAN RESEARCH	26	
		PATROL	27	
		SUPPORT	28	
		FISHING VESSEL	29	
		MERCHANT VESSEL	30	
		PATROL CRAFT ESCORT	31	
		AMPHIBIOUS GENERAL	32	
		ASSAULT		
		MISSILE CONTROL UNIT	33	
		DECOY	34	
		UNDEFINED	35 THROUGH 62	
		RESET TO NO STATEMENT	63	
1798	002	SURFACE (MARITIME) PLATFORM ACTIVITY -----		THE SURFACE (MARITIME) PLATFORM ACTIVITY FIELD ALONG WITH THE SUR- FACE (MARITIME) PLATFORM FIELD FURTHER DEFINES THE IDENTITY OF A SURFACE (MARITIME) TRACK.
		NO STATEMENT	0	
		AIR WARFARE SUPPORT	1	
		OVER THE HORIZON	2	
		TARGETING (OTHT)		
		TRAINING	3	
		LOGISTICS SUPPORT	4	
		ANTISURFACE WARFARE	5	
		ELECTRONIC WARFARE (EW)	6	
		FISHERY PROTECTION	7	
		SEARCH AND RESCUE (SAR)	8	
		ESCORTING	9	
		MINELAYING	10	
		TRANSITING	11	
		NAVAL GUNFIRE SUPPORT	12	
		INTRUDING	13	
		AMPHIBIOUS WARFARE	14	
		INTELLIGENCE COLLECTING	15	
		PATROL	16	
		TRANSPORT	17	
		ANTISUBMARINE WARFARE	18	
		(ASW)		

FIELD CODING FOR J2.3C1

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1798	002	SURFACE (MARITIME) PLATFORM ACTIVITY	(CONTINUED)	

		SHADOWING/INTERVENING	19	
		TOWING	20	
		SPECIAL WARFARE	21	
		STRIKE WARFARE	22	
		ANTIAIR WARFARE	23	
		FISHING	24	
		PICKETING	25	
		MINE COUNTERMEASURES	26	
		MINE WARFARE	27	
		MARKING	28	
		NONCOMBATANT OPERATIONS	29	
		UNDERWAY REPLENISHMENT	30	
		SURVEYING	31	
		ELECTRONIC WARFARE	32	
		SUPPORT (ES)		
		ELECTRONIC ATTACK (EA)	33	
		FLIGHT OPERATIONS	34	
		VIDEO DATA LINKING	35	
		(TARGETING)		A METHOD OF PROVIDING REMOTE TARGETING DATA TO A FIRING PLATFORM/WEAPON.
		PLANE GUARD	36	
		RESCUE SHIP/LIFEGUARD	37	
		UNDEFINED	38 THROUGH 49	
		RETURN TO BASE (RTB)	50	
		UNDEFINED	51 THROUGH 114	
		SURFACE (MARITIME)	115 THROUGH 126	
		ACTIVITY 1 THROUGH 12		A SPECIFIC SURFACE (MARITIME) MISSION DEFINED BY THE JOINT OPERATIONAL COMMANDER.
		RESET TO NO STATEMENT	127	

.....

WORD TITLE: SURFACE (MARITIME) PPLI - MISSION INFORMATION CONTINUATION
WORD

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
			:	LINK 4A ADDRESS														:						
<---			:															:	--->					
			:	13														:						

:	69:	68:	67:	66:	65	64	63	62	61	60	59:	58	57	56	55	54	53	52	51	50	
:	:	VFC:	ARI:	ARI:	:							:									
:	SP	:	IND:	CC	:	VC	:	CONTROL CHANNEL				:	VOICE FREQUENCY/CHANNEL								
:	:	:	:	:	:							:									
:	1	:	1	:	1	:	1	:	7				:	13							

WORD DESCRIPTION

WORD NUMBER: J2.3C2

WORD TITLE: SURFACE (MARITIME) PPLI - MISSION INFORMATION CONTINUATION
WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	01
1551	001	CONTINUATION WORD LABEL	2-	6 5	00010
1717	001	VOICE CALL SIGN INDICATOR (VCS IND)	7	1	
1718	001	LINK 4A ADDRESS INDICATOR (L4A IND)	8	1	
264	001	VOICE CALL SIGN	9-	32 24	
291	001	LINK 4A ADDRESS	33-	45 13	
417	016	VOICE FREQUENCY/CHANNEL	46-	58 13	
348	006	CONTROL CHANNEL	59-	65 7	
1571	003	ACTIVE RELAY INDICATOR, VOICE CHANNEL (ARI VC)	66	1	
1571	004	ACTIVE RELAY INDICATOR, CONTROL CHANNEL (ARI CC)	67	1	
898	001	VOICE FREQUENCY/CHANNEL INDICATOR (VFC IND)	68	1	
756	001	SPARE (SP)	69	1	

FIELD CODING FOR J2.3C2

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1717	001	VOICE CALL SIGN INDICATOR -----		USED TO INDICATE WHETHER OR NOT THE VOICE CALL SIGN FIELD SHOULD BE INTERPRETED.
		DO NOT INTERPRET VOICE CALL SIGN	0	
		INTERPRET VOICE CALL SIGN	1	
1718	001	LINK 4A ADDRESS INDICATOR -----		USED TO INDICATE WHETHER OR NOT THE LINK 4A ADDRESS FIELD SHOULD BE INTERPRETED.
		DO NOT INTERPRET LINK 4A ADDRESS	0	
		INTERPRET LINK 4A ADDRESS	1	
264	001	VOICE CALL SIGN -----		AN ALPHANUMERICALLY-CODED CALL SIGN USED IN VOICE COMMUNICATIONS TO IDENTIFY A FORCE ELEMENT. THE 24 BITS ARE DIVIDED INTO FOUR GROUPS OF 6 BITS. EACH GROUP IS INTERPRETED INDEPENDENTLY IN ACCORDANCE WITH THE FOLLOWING CODE:
		BLANK	0	
		1	1	
		2	2	
		3	3	
		4	4	
		5	5	
		6	6	
		7	7	
		8	8	
		9	9	
		A	10	
		B	11	
		C	12	
		D	13	
		E	14	
		F	15	
		G	16	
		H	17	
		I	18	
		J	19	
		K	20	

FIELD CODING FOR J2.3C2

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
264	001	VOICE CALL SIGN -----	(CONTINUED)	
		L	21	
		M	22	
		N	23	
		O	24	
		P	25	
		Q	26	
		R	27	
		S	28	
		T	29	
		U	30	
		V	31	
		W	32	
		X	33	
		Y	34	
		Z	35	
		UNDEFINED	36 THROUGH 62	
		0 (ZERO)	63	
291	001	LINK 4A ADDRESS -----		THE ADDRESS OF A SPECIFIC AIRCRAFT ON TACTICAL DATA INFORMATION LINK LINK 4A.
		NUMERIC	00000 THROUGH 17777 (OCTAL)	
417	016	VOICE FREQUENCY/CHANNEL -----		IDENTIFIES A UHF VOICE RADIO CHANNEL NUMBER TO ACCOUNT FOR 7000 POSSIBLE RADIO FREQUENCIES IN THE 225 TO 400 MHZ BAND OR THE OPTION OF SELECTING CHANNEL GROUP A OR CHANNEL GROUP B.
		NO STATEMENT	0	
		UHF FREQUENCY	1 THROUGH 7000	THE BIT CODE IS RELATED TO THE UHF FREQUENCY BY USING THE FOLLOWING FORMULA: $\text{FREQ(MHZ)} = 225 + .025(N-1)$ WHERE N = BIT CODE NUMBER.
		ILLEGAL	7001 THROUGH 7039	
		CHANNEL GROUP A	7040 THROUGH 7167	128 CHANNELS FROM 0-127.
		CHANNEL GROUP B	7168 THROUGH 7295	128 CHANNELS FROM 0-127.
		ILLEGAL	7296 THROUGH 8191	
348	006	CONTROL CHANNEL -----		

5.1-377

MIL-STD-6016B

FIELD CODING FOR J2.3C2

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
348	006	CONTROL CHANNEL -----	(CONTINUED)	
		CONTROL CHANNEL NUMBER NO STATEMENT	0 THROUGH 126 127	
1571	003	ACTIVE RELAY INDICATOR, VOICE CHANNEL -----		INDICATES THE STATUS OF A UNIT'S RE- LAYING CAPABILITY OVER A VOICE CHANNEL.
		RELAYING FUNCTION INACTIVE	0	
		RELAYING FUNCTION ACTIVE	1	
1571	004	ACTIVE RELAY INDICATOR, CONTROL CHANNEL -----		INDICATES THE STATUS OF A UNIT'S RE- LAYING CAPABILITY OVER A CONTROL CHANNEL.
		RELAYING FUNCTION INACTIVE	0	
		RELAYING FUNCTION ACTIVE	1	
898	001	VOICE FREQUENCY/CHANNEL INDICATOR -----		INDICATES WHETHER THE VOICE FREQUENCY/CHANNEL IN THE MESSAGE IS THE PRIMARY OR THE ALTERNATE VOICE FREQUENCY/CHANNEL.
		PRIMARY VOICE FREQUENCY/ CHANNEL	0	THE VOICE FREQUENCY/CHANNEL IS THE PRIMARY VOICE FREQUENCY/CHANNEL.
		ALTERNATE VOICE FREQUENCY/CHANNEL	1	THE VOICE FREQUENCY/CHANNEL IS THE ALTERNATE VOICE FREQUENCY/CHANNEL.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: SURFACE (MARITIME) PPLI - RELATIVE NAVIGATION CONTINUATION
WORD

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
V COORDINATE																								

:	69	68	67:	66	65	64	63:	62	61	60	59	58	57	56	55	54	53	52	51	50
:	RELATIVE			:	RELATIVE			:												
:	AZIMUTH			:	POSITION			:	BETA ANGLE											
:	QUALITY			:	QUALITY			:												
:	3			:	4			:	15											

WORD DESCRIPTION

WORD NUMBER: J2.3C3

WORD TITLE: SURFACE (MARITIME) PPLI - RELATIVE NAVIGATION CONTINUATION
WORD

REFERENCE			BIT	#	
DFI/DUI	DATA FIELD	DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD	FORMAT	0-	1 2	01
1551 001	CONTINUATION	WORD LABEL	2-	6 5	00011
756 001	SPARE	(SP)	7	1	
276 001	U	COORDINATE	8-	27 20	
277 001	V	COORDINATE	28-	47 20	
284 001	BETA	ANGLE	48-	62 15	
278 001	RELATIVE	POSITION QUALITY	63-	66 4	
285 001	RELATIVE	AZIMUTH QUALITY	67-	69 3	

FIELD CODING FOR J2.3C3

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
276	001	U COORDINATE -----		THE EAST WEST COMPONENT OF POSITION MEASURED IN A U, V CARTESIAN COOR- DINATE SYSTEM WHERE THE U,V PLANE IS TANGENT TO THE EARTH AT ITS ORIGIN. POSITIONS EAST OF THE ORIGIN ARE POSITIVE. POSITIONS WEST OF THE ORIGIN ARE NEGATIVE. IN 1/512 DATA MILE INCREMENTS.
		0 DATA MILES	0	
		+1/512 THROUGH	1 THROUGH 524287	
		+1023 511/512 DATA MILES		
		NO STATEMENT	524288	
		-1023 511/512 THROUGH	524289 THROUGH 1048575	
		-1/512 DATA MILES		
277	001	V COORDINATE -----		THE NORTH SOUTH COMPONENT OF POSI- TION MEASURED IN A U,V CARTESIAN COORDINATE SYSTEM WHERE THE U,V PLANE IS TANGENT TO THE EARTH AT ITS ORIGIN. POSITIONS NORTH OF THE ORIGIN ARE POSITIVE. POSI- TIONS SOUTH OF THE ORIGIN ARE NEGATIVE. IN 1/512 DATA MILE INCREMENTS.
		0 DATA MILES	0	
		+1/512 THROUGH	1 THROUGH 524287	
		+1023 511/512 DATA MILES		
		NO STATEMENT	524288	
		-1023 511/512 THROUGH	524289 THROUGH 1048575	
		-1/512 DATA MILES		
284	001	BETA ANGLE -----		THE ORIENTATION OF THE U,V TANGENT PLANE WITH RESPECT TO TRUE NORTH, I.E., THE ANGLE FORMED BY THE V-AXIS AND TRUE NORTH. COUNTER- CLOCKWISE DISPLACEMENT OF THE V-AXIS IS STATED AS A POSITIVE ANGLE, CLOCKWISE AS A NEGATIVE ANGLE. IN 0.0125 MILLIRADIAN INCREMENTS.
		0 MILLIRADIANS	0	
		+0.0125 THROUGH +204.8 MILLIRADIANS	1 THROUGH 16383	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

284	001	BETA ANGLE	(CONTINUED)

		NO STATEMENT	16384
		-204.8 THROUGH -0.0125	16385 THROUGH 32767
		MILLIRADIANS	

278 001 RELATIVE POSITION QUALITY

INDICATES THE LEVEL OF RELATIVE POSITION UNCERTAINTY IN THE U,V TANGENT PLANE AS ESTIMATED BY THE TERMINAL RELATIVE NAVIGATION FUNCTION. THE QUALITY IS STATED AS A NUMERICAL VALUE FROM 0 TO 15 WHERE THE HIGHER VALUES INDICATE THE HIGHER LEVELS OF QUALITY.

>18080 FEET	0
< OR = 18080 FEET	1
< OR = 9040 FEET	2
< OR = 4520 FEET	3
< OR = 2260 FEET	4
< OR = 1600 FEET	5
< OR = 1130 FEET	6
< OR = 800 FEET	7
< OR = 565 FEET	8
< OR = 400 FEET	9
< OR = 282 FEET	10
< OR = 200 FEET	11
< OR = 141 FEET	12
< OR = 100 FEET	13
< OR = 71 FEET	14
NAVIGATION CONTROLLER	15

REFERENCE SOURCE FOR NAVIGATION.

285 001 RELATIVE AZIMUTH QUALITY

THE QUALITY IS STATED AS A NUMERICAL
VALUE FROM 0 TO 7 WHERE THE HIGHER
VALUES INDICATE THE HIGHER LEVELS
OF QUALITY.

>64 MILLIRADIANS	0
< OR = 64 MILLIRADIANS	1
< OR = 32 MILLIRADIANS	2
< OR = 16 MILLIRADIANS	3
< OR = 8 MILLIRADIANS	4
< OR = 4 MILLIRADIANS	5
< OR = 2 MILLIRADIANS	6
< OR = 1 MILLIRADIAN	7

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

J2.4 MESSAGE SUMMARY

PURPOSE

The J2.4 Subsurface (Maritime) PPLI message is used to provide all JUs information about subsurface (maritime) JUs on the Link 16 network. It is used by subsurface (maritime) JUs to provide network participation status, identification, positional information, and relative navigation information.

DATA ELEMENT SUMMARY

<u>J2.4I</u>		<u>J2.4C1 (Continued)</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	SUBSURFACE (MARITIME) PLATFORM	6
LABEL, J-SERIES	5	SUBSURFACE (MARITIME) PLATFORM	7
SUBLABEL, J-SERIES	3	ACTIVITY	
MESSAGE LENGTH INDICATOR	3	SPARE	20
EXERCISE INDICATOR	1		
DISPLACED POSITION INDICATOR	1	<u>J2.4C2</u>	
FORCE TELL INDICATOR	1	DATA ELEMENT	# BITS
EMERGENCY INDICATOR	1	WORD FORMAT	2
COMMAND AND CONTROL INDICATOR	1	CONTINUATION WORD LABEL	5
SIMULATION INDICATOR	1	VOICE CALL SIGN INDICATOR	1
SPARE	2	LINK 4A ADDRESS INDICATOR	1
ACTIVE RELAY INDICATOR, WIDE	1	VOICE CALL SIGN	24
AREA NETWORK		LINK 4A ADDRESS	13
RTT REPLY STATUS INDICATOR	1	VOICE FREQUENCY/CHANNEL	13
NETWORK PARTICIPATION STATUS	4	CONTROL CHANNEL	7
INDICATOR		ACTIVE RELAY INDICATOR, VOICE	1
TIME QUALITY	4	CHANNEL	
GEODETIC POSITION QUALITY	4	ACTIVE RELAY INDICATOR,	1
SPARE	7	CONTROL CHANNEL	
DEPTH, 15 METERS	7	VOICE FREQUENCY/CHANNEL	1
DEPTH CATEGORY	4	INDICATOR	
MISSION CORRELATOR	8	SPARE	1
DEPTH QUALITY	4		
SPARE	5	<u>J2.4C3</u>	
		DATA ELEMENT	# BITS
<u>J2.4E0</u>		WORD FORMAT	2
DATA ELEMENT	# BITS	CONTINUATION WORD LABEL	5
WORD FORMAT	2	SPARE	1
LATITUDE, 0.0013 MINUTE	23	U COORDINATE	20
LONGITUDE, 0.0013 MINUTE	24	V COORDINATE	20
SPARE	1	BETA ANGLE	15
COURSE	9	RELATIVE POSITION QUALITY	4
SPEED	11	RELATIVE AZIMUTH QUALITY	3
<u>J2.4C1</u>		<u>J2.4C4</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	WORD FORMAT	2
CONTINUATION WORD LABEL	5	CONTINUATION WORD LABEL	5
SPARE	1	SPARE	3
MODE I CODE	5	LATITUDE, 0.0103 MINUTE	20
MODE II CODE	12	SPARE	3
MODE III CODE	12	LONGITUDE, 0.0103 MINUTE	21

MIL-STD-6016B

J2.4 MESSAGE SUMMARY (Continued)

DATA ELEMENT SUMMARY (Continued)

J2.4C4 (Continued)	
DATA ELEMENT	# BITS
SPARE	16

MIL-STD-6016B

J2.4 TRANSMIT/RECEIVE RULES

TITLE: Subsurface (Maritime) PPLI Message

TRANSMIT RULES

1. The J2.4B Subsurface (Maritime) PPLI Basic Message consists of the J2.4I Subsurface (Maritime) PPLI initial word and the J2.4E0 Subsurface (Maritime) PPLI extension word. The J2.4B basic message shall be transmitted periodically at an RRN = 6 (12 seconds, 8-20 second interval) or, when specified at the access rate in the time slot assignment of subsurface (maritime) JUs when their terminals are operating in the Normal Mode and the Network Participation Status Indicator field is set to one of the following:

- a. Active.
- b. No J0.0 Message Being Received.
- c. High Error Rate.
- d. Tactical Data System (TDS) Failure.

2. Applicable continuation words shall be transmitted in a J2.4I/J2.4E0/J2.4CX word sequence. Only one continuation word shall follow the extension word when only three words are allowed in any one time slot.

3. The J2.4C4 Subsurface (Maritime) PPLI - Displaced Position continuation word shall be transmitted as described in this section only if the Displaced Position Indicator in the initial word is set to 1. If the Displaced Position Indicator is set to 0, the J2.4C4 word shall not be transmitted.

4. When the JU is assigned to transmit in the Joint Network PPLI PG or is neither an active voice relay nor active control relay and assigned to transmit in the PPLI A or PPLI B network PG, it shall transmit in each assigned PG a J2.4I/J2.4E0/J2.4C3 word sequence every second time slot in which a J2.4B message is scheduled for transmission. The intervening transmissions shall be a J2.4I/J2.4E0/J2.4CX word sequence with the sequence of J2.4CX words in the following order:

J2.4 TRANSMIT/RECEIVE RULES (Continued)

TRANSMIT RULES (Continued)

a. J2.4C1 Subsurface (Maritime) PPLI - Amplification continuation word.

b. J2.4C2 Subsurface (Maritime) PPLI - Mission Information continuation word.

c. J2.4C4 Subsurface (Maritime) PPLI - Displaced Position continuation word.

d. J2.4C2 Subsurface (Maritime) PPLI - Mission Information continuation word.

5. When the JU is either an active voice relay or active control relay and assigned to transmit in either the PPLI A or PPLI B network PG, it shall transmit in both PGs a J2.4I/J2.4E0/J2.4C2 word sequence every second time slot in which a J2.4B message is scheduled for transmission. The intervening transmissions shall be a J2.4I/J2.4E0/J2.4CX word sequence with the sequence of J2.4CX words in the following order:

a. J2.4C1 Subsurface (Maritime) PPLI - Amplification continuation word.

b. J2.4C3 Subsurface (Maritime) PPLI - Relative Navigation continuation word.

c. J2.4C4 Subsurface (Maritime) PPLI - Displaced Position continuation word.

d. J2.4C3 Subsurface (Maritime) PPLI - Relative Navigation continuation word.

6. When data within a J2.4C1, J2.4C2, J2.4C3, or J2.4C4 word change and only three words are allowed in a time slot, a J2.4I/J2.4E0/J2.4CX word sequence shall replace the next Subsurface (Maritime) PPLI message in the sequence

J2.4 TRANSMIT/RECEIVE RULES (Continued)

TRANSMIT RULES (Continued)

except that a J2.4I/J2.4E0/J2.4C2 word sequence shall not be replaced if the JU is an active voice or active control relay. If more than three words can be transmitted in a time slot, a J2.4I/J2.4E0/J2.4Cx/J2.4CX/J2.4CX/J2.4CX/etc. word sequence shall be transmitted according to transmit rules 3 and 4 above except that no continuation word shall be repeated in the same time slot. If any of the continuation words having changed data cannot be transmitted in the next time slot because of the number of words allowed in the time slot, transmission shall occur such that the J2.4C2 word has the first priority, the J2.4C3 word has the second priority, the J2.4C1 word has the third priority, and the J2.4C4 word has the fourth priority.

7. If no data is available for a continuation word then that continuation word shall be deleted from the sequence and the next continuation word in the sequence transmitted. If no data exists for all continuation words, the J2.4B message shall be transmitted.

8. A J2.4I/J2.4E0/J2.4C3 word sequence shall be transmitted with the Network Participation Status Indicator field set to the appropriate condition prior to the terminal taking the action described (i.e., Radio Silent, Polling, Inactive) or in the next transmission opportunity after the condition occurs (i.e., High Error Rate, No J0.0 Message Being Received, TDS Failure).

9. A J2.4B basic message shall be transmitted in response to a J0.6 Communications Control message in the time slot provided. If the terminal is in the Polling Mode, the RTT Reply Status Indicator field shall be set to not operational.

RECEIVE RULES

1. All received nonsimulated (Simulation Indicator = 0) and nonrelayed (Relayed Transmission Indicator = 0) J2.4 messages shall be processed in accordance with the requirements for terminal synchronization and relative navigation.

WORD MAP

WORD NUMBER: J2.4I

WORD TITLE: SUBSURFACE (MARITIME) PPLI INITIAL WORD

24	23:	22:	21:	20	19:	18:	17:	16:	15:	14:	13:	12	11	10:	09	08	07:	06	05	04	03	02:	01	00:																		
<---		:	:	ARI:			:	SIM:C2	:	EMG:FT	:	DP	:	EX	:	MESSAGE	:	SUBLABEL,	:					:	WORD	:																
		:	RRS:	WAN:	SP	:	:	IND:	IND:	IND:	IND:	IND:	IND:	:	LENGTH	:	J-SERIES	:	LABEL, J-SERIES			:	FORMAT	:																		
		:	:	:			:	:	:	:	:	:	:	:	:	INDICATOR	:					:	:	:																		
		:	1	:	1	:	2	:	1	:	1	:	1	:	1	:	1	:	3	:	3	:	5		:	2	:															
49:	48	47	46	45	44	43	42:	41	40	39	38	37	36	35:	34	33	32	31:	30	29	28	27:	26	25																		
<---		:	DEPTH, 15 METERS					:	SPARE					:	GEODETIC POSITION QUALITY			:	TIME QUALITY			:	NPS IND																			
		:						:						:	QUALITY			:				:																				
		:	7					:	7					:	4			:	4			:	4																			
		:	69	68	67	66	65:	64	63	62	61:	60	59	58	57	56	55	54	53:	52	51	50																				
		:	SPARE					:	DEPTH QUALITY					:	MISSION CORRELATOR					:	DEPTH CATEGORY			:																		
		:						:						:						:				:																		
		:	5					:	4					:	8					:	4			:																		

WORD DESCRIPTION

WORD NUMBER: J2.4I

WORD TITLE: SUBSURFACE (MARITIME) PPLI INITIAL WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	00
270	004	LABEL, J-SERIES	2-	6 5	00010
271	005	SUBLABEL, J-SERIES	7-	9 3	100
800	001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
385	003	EXERCISE INDICATOR (EX IND)	13	1	
1619	001	DISPLACED POSITION INDICATOR (DP IND)	14	1	
354	002	FORCE TELL INDICATOR (FT IND)	15	1	
355	002	EMERGENCY INDICATOR (EMG IND)	16	1	
893	001	COMMAND AND CONTROL INDICATOR (C2 IND)	17	1	
1604	001	SIMULATION INDICATOR (SIM IND)	18	1	
756	002	SPARE (SP)	19-	20 2	
1571	002	ACTIVE RELAY INDICATOR, WIDE AREA NETWORK (ARI WAN)	21	1	
274	001	RTT REPLY STATUS INDICATOR (RRS)	22	1	
1613	001	NETWORK PARTICIPATION STATUS INDICATOR (NPS IND)	23-	26 4	
279	001	TIME QUALITY	27-	30 4	
283	001	GEODETIC POSITION QUALITY	31-	34 4	
756	007	SPARE	35-	41 7	
366	008	DEPTH, 15 METERS	42-	48 7	
366	009	DEPTH CATEGORY	49-	52 4	
725	003	MISSION CORRELATOR	53-	60 8	
283	004	DEPTH QUALITY	61-	64 4	
756	005	SPARE	65-	69 5	

FIELD CODING FOR J2.4I				(SHEET 1)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
385	003	EXERCISE INDICATOR ----- NON-EXERCISE TRACK EXERCISE TRACK OR UNIT	0 1	INDICATES WHETHER OR NOT THE MESSAGE IDENTIFIES AN EXERCISE TRACK.
1619	001	DISPLACED POSITION INDICATOR ----- ACTUAL UNIT POSITION CONTAINED IN EXTENSION WORD ACTUAL UNIT POSITION CONTAINED IN CONTINUA- TION WORD	0 1	INDICATES WHETHER THE JTIDS/MIDS UNIT'S LOCATION IS CONTAINED IN THE EXTENSION OR CONTINUATION WORD.
354	002	FORCE TELL INDICATOR ----- NO STATEMENT FORCE TELL STATUS	0 1	THIS INDICATOR CAUSES TRACK/POINT DATA TO BE FORCED THROUGH CONTROLLABLE RECEIVE FILTERS.
355	002	EMERGENCY INDICATOR ----- NO STATEMENT EMERGENCY STATUS	0 1	USED TO INDICATE WHETHER OR NOT A UNIT OR TRACK HAS AN EMERGENCY.
893	001	COMMAND AND CONTROL INDICATOR ----- NONC2 UNIT C2 UNIT	0 1	THIS INDICATOR ALLOWS A JU TO IDENTIFY ITSELF AS A NONC2 OR C2 UNIT. THE UNIT BEING REPORTED IS A NONC2 UNIT. THE UNIT BEING REPORTED IS A C2 UNIT.
1604	001	SIMULATION INDICATOR ----- REAL TRACK OR UNIT SIMULATED TRACK OR UNIT	0 1	INDICATES WHETHER THE TRACK REFER- ENCED IN THE MESSAGE IS A REAL OR A SIMULATED TRACK.
1571	002	ACTIVE RELAY INDICATOR, WIDE AREA NETWORK -----		INDICATES THE STATUS OF A UNIT'S RE- LAYING CAPABILITY OVER THE WIDE- AREA NETWORK.

		FIELD CODING FOR J2.4I		(SHEET 2)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1571	002	ACTIVE RELAY INDICATOR, WIDE AREA NETWORK -----	(CONTINUED)	
		RELAYING FUNCTION	0	
		INACTIVE		
		RELAYING FUNCTION ACTIVE	1	
274	001	RTT REPLY STATUS INDICATOR -----		CONVEYS THE STATUS OF A TERMINAL'S RTT REPLY FUNCTION.
		RTT REPLY FUNCTION	0	
		NORMAL		
		RTT REPLY FUNCTION NOT OPERATIONAL	1	
1613	001	NETWORK PARTICIPATION STATUS INDICATOR -----		INDICATES TO WHAT DEGREE A UNIT IS PARTICIPATING ON THE INTERFACE.
		NO STATEMENT	0	
		ACTIVE-NON SPECIFIC	1	
		INACTIVE-NON SPECIFIC	2	
		CONDITIONAL RADIO	3	
		SILENCE		
		HIGH ERROR RATE	4	
		NO JO.0 MESSAGE BEING RECEIVED	5	
		TACTICAL DATA SYSTEM	6	
		FAILURE		
		POLLING	7	
		UNDEFINED	8 THROUGH 15	
279	001	TIME QUALITY -----		THE QUALITY IS STATED AS A NUMERICAL VALUE FROM 0 TO 15 WHERE THE HIGHER VALUES INDICATE THE HIGHER QUALITIES. QUALITY 0 IS NOT TO BE USED FOR SYNCHRONIZATION OR THE RELATIVE NAVIGATION FUNCTION.
		> 18080 NANOSECONDS	0	
		< OR = 18080 NANOSECONDS	1	
		< OR = 9040 NANOSECONDS	2	
		< OR = 4520 NANOSECONDS	3	
		< OR = 2260 NANOSECONDS	4	
		< OR = 1600 NANOSECONDS	5	
		< OR = 1130 NANOSECONDS	6	
		< OR = 800 NANOSECONDS	7	
		< OR = 565 NANOSECONDS	8	

FIELD CODING FOR J2.4I

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
279	001	TIME QUALITY -----	(CONTINUED)	
		< OR = 400 NANOSECONDS	9	
		< OR = 282 NANOSECONDS	10	
		< OR = 200 NANOSECONDS	11	
		< OR = 141 NANOSECONDS	12	
		< OR = 100 NANOSECONDS	13	
		< OR = 71 NANOSECONDS	14	
		NET TIME REFERENCE	15	
283	001	GEODETIC POSITION QUALITY -----		THE LEVEL OF GEODETIC POSITION UNCERTAINTY AS ESTIMATED BY THE TERMINAL NAVIGATION FUNCTION.
		>18080 FT	0	
		< OR = TO 18080 FT	1	
		< OR = TO 9040 FT	2	
		< OR = TO 4520 FT	3	
		< OR = TO 2260 FT	4	
		< OR = TO 1600 FT	5	
		< OR = TO 1130 FT	6	
		< OR = TO 800 FT	7	
		< OR = TO 565 FT	8	
		< OR = TO 400 FT	9	
		< OR = TO 282 FT	10	
		< OR = TO 200 FT	11	
		< OR = TO 141 FT	12	
		< OR = TO 100 FT	13	
		< OR = TO 71 FT	14	
		< OR = TO 50 FT	15	
366	008	DEPTH, 15 METERS -----		EXPRESSES DEPTH AS MEASURED DOWNWARD FROM MEAN SEA LEVEL (MSL) AS A POSITIVE QUANTITY IN METERS. IN 15 METER INCREMENTS.
		0 THROUGH 1890 METERS NO STATEMENT	0 THROUGH 126 127	
366	009	DEPTH CATEGORY -----		EXPRESSES DEPTH BY DESCRIPTION OF HORIZONTAL PLANES AT OR BELOW MEAN SEA LEVEL (MSL).
		NO STATEMENT	0	
		SURFACED	1	
		ESTIMATED SHALLOW	2	
		PERISCOPE DEPTH	3	
		ABOVE FIRST LAYER	4	
		BELOW FIRST LAYER	5	

FIELD CODING FOR J2.4I					(SHEET 4)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION	
366	009	DEPTH CATEGORY -----	(CONTINUED)		
		BETWEEN FIRST AND SECOND LAYERS	6		
		BETWEEN SECOND AND THIRD LAYERS	7		
		BELOW BOTTOM LAYER	8		
		ESTIMATED DEEP	9		
		BOTTOMED	10		
		UNDEFINED	11 THROUGH 14		
		UNKNOWN	15		
725	003	MISSION CORRELATOR -----		SPECIFIES THE IDENTIFYING NUMBER ASSIGNED TO AN OVERALL MISSION. THIS ENABLES PARTICIPANTS WITH DIFFERENT OBJECTIVES ON SPECIFIC MISSIONS TO BE ASSOCIATED WITH THE SAME OVERALL MISSION.	
		NO STATEMENT NUMERIC	0 1 THROUGH 255		
283	004	DEPTH QUALITY -----		THE LEVEL OF DEPTH UNCERTAINTY AS ESTIMATED BY THE TERMINAL NAVIGATION FUNCTION.	
		TBD			

.....

WORD TITLE: SUBSURFACE (MARITIME) PPLI EXTENSION WORD

: 49:	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25:
: SP :	LONGITUDE, 0.0013 MINUTE																				:			
: 1 :	24																				:			

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50	:		
:												:											:
:	SPEED											:	COURSE										:
:												:											:
:	11											:	9										:

WORD DESCRIPTION

WORD NUMBER: J2.4E0
WORD TITLE: SUBSURFACE (MARITIME) PPLI EXTENSION WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	10
281 015	LATITUDE, 0.0013 MINUTE	2-	24 23	
282 015	LONGITUDE, 0.0013 MINUTE	25-	48 24	
756 001	SPARE (SP)	49	1	
371 015	COURSE	50-	58 9	
367 018	SPEED	59-	69 11	

FIELD CODING FOR J2.4E0

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
281	015	LATITUDE, 0.0013 MINUTE ----- 0 DEGREES +90/4,194,303 THROUGH +90 DEGREES NORTH NO STATEMENT -90 THROUGH -90/4,194,303 DEGREES SOUTH	0 1 THROUGH 4194303 4194304 4194305 THROUGH 8388607	THE PRECISION IS APPROXIMATELY 8 FEET. IN 90/4,194,303 DEGREE INCREMENTS.
282	015	LONGITUDE, 0.0013 MINUTE ----- 0 DEGREES +180/8,388,607 THROUGH +180 DEGREES EAST NO STATEMENT -180 THROUGH -180/8,388,607 DEGREES WEST	0 1 THROUGH 8388607 8388608 8388609 THROUGH 16777215	THE PRECISION IS APPROXIMATELY 8 FEET. IN 180/8,388,607 DEGREE INCREMENTS.
371	015	COURSE ----- 0 THROUGH 359 DEGREES ILLEGAL NO STATEMENT	0 THROUGH 359 360 THROUGH 510 511	INDICATES THE DIRECTION OF TRAVEL OF AN OBJECT IN DEGREES WITH RESPECT TO TRUE NORTH. IN 1 DEGREE INCREMENTS.
367	018	SPEED ----- 0 THROUGH 4092 DATA MILES PER HOUR NO STATEMENT	0 THROUGH 2046 2047	THE RATE OF CHANGE OF POSITION. EXPRESSES GROUND SPEED IN 2 DATA MILES PER HOUR INCREMENTS.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: SUBSURFACE (MARITIME) PPLI - AMPLIFICATION CONTINUATION WORD

:	49	48	47	46	45	44	43:	42	41	40	39	38	37:	36	35	34	33	32	31	30	29	28	27	26	25:		
:	SUBSURFACE (MARITIME)							:	SUBSURFACE (MARITIME)							:											:
:	PLATFORM ACTIVITY							:	PLATFORM							:	MODE III CODE										:
:								:								:											:
:	7							:	6							:	12										:

5.1-400

MIL-STD-6016B

WORD DESCRIPTION

WORD NUMBER: J2.4C1

WORD TITLE: SUBSURFACE (MARITIME) PPLI - AMPLIFICATION CONTINUATION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550 001		WORD FORMAT	0-	1 2	01
1551 001		CONTINUATION WORD LABEL	2-	6 5	00001
756 001		SPARE (SP)	7	1	
293 003		MODE I CODE	8-	12 5	
294 002		MODE II CODE	13-	24 12	
295 002		MODE III CODE	25-	36 12	
1797 003		SUBSURFACE (MARITIME) PLATFORM	37-	42 6	
1798 003		SUBSURFACE (MARITIME) PLATFORM	43-	49 7	
		ACTIVITY			
756 020		SPARE	50-	69 20	

FIELD CODING FOR J2.4C1

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
293	003	MODE I CODE -----		PROVIDES MODE I BEACON REPLY INFORMATION. WITHIN THE MODE FIELD, SIF CODES ARE IN THE ORDER A4 A2 A1 B2 B1. THE LEAST SIGNIFICANT DIGIT CANNOT BE GREATER THAN 3. THIS CODE CANNOT BE ASSIGNED AS AN OPERATIONAL CODE. INDICATES THERE ARE NO DATA FOR TRANSMISSION.
		0 (NO STATEMENT)	00 (OCTAL)	
		1	01 (OCTAL)	
		2	02 (OCTAL)	
		3	03 (OCTAL)	
		4	10 (OCTAL)	
		5	11 (OCTAL)	
		6	12 (OCTAL)	
		7	13 (OCTAL)	
		8	20 (OCTAL)	
		9	21 (OCTAL)	
		10	22 (OCTAL)	
		11	23 (OCTAL)	
		12	30 (OCTAL)	
		13	31 (OCTAL)	
		14	32 (OCTAL)	
		15	33 (OCTAL)	
		16	40 (OCTAL)	
		17	41 (OCTAL)	
		18	42 (OCTAL)	
		19	43 (OCTAL)	
		20	50 (OCTAL)	
		21	51 (OCTAL)	
		22	52 (OCTAL)	
		23	53 (OCTAL)	
		24	60 (OCTAL)	
		25	61 (OCTAL)	
		26	62 (OCTAL)	
		27	63 (OCTAL)	
		28	70 (OCTAL)	
		29	71 (OCTAL)	
		30	72 (OCTAL)	
		31	73 (OCTAL)	
294	002	MODE II CODE -----		PROVIDES MODE II BEACON REPLY INFORMATION. THIS CODE CANNOT BE ASSIGNED AS AN OPERATIONAL CODE. INDICATES THERE
		NO STATEMENT	0	

FIELD CODING FOR J2.4C1

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
294	002	MODE II CODE -----	(CONTINUED)	
		1 THROUGH 7777 (OCTAL)	0001 THROUGH 7777 (OCTAL)	ARE NO DATA FOR TRANSMISSION. WITHIN THE FIELD, SIF CODES ARE IN THE ORDER A, B, C, D WITH EACH TRIAD IN THE ORDER 4, 2, 1.
295	002	MODE III CODE -----		PROVIDES MODE III BEACON REPLY INFORMATION.
		NO STATEMENT	0	THIS CODE CANNOT BE ASSIGNED AS AN OPERATIONAL CODE. INDICATES THERE ARE NO DATA FOR TRANSMISSION.
		1 THROUGH 7777 (OCTAL)	0001 THROUGH 7777 (OCTAL)	WITHIN THE FIELD, SIF CODES ARE IN THE ORDER A, B, C, D WITH EACH TRIAD IN THE ORDER 4, 2, 1.
1797	003	SUBSURFACE (MARITIME) PLATFORM -----		THE SUBSURFACE (MARITIME) PLATFORM FIELD ALONG WITH THE SUBSURFACE (MARITIME) PLATFORM ACTIVITY FIELD FURTHER DEFINES THE IDENTITY OF A SUBSURFACE (MARITIME) TRACK.
		NO STATEMENT	0	
		SUBMARINE PROPULSION	1	
		UNKNOWN		
		DIESEL ELECTRIC	2	
		SUBMARINE GENERAL		
		DIESEL ELECTRIC ATTACK	3	
		SUBMARINE		
		DIESEL ELECTRIC MISSILE	4	
		SUBMARINE		
		DIESEL ELECTRIC	5	
		BALLISTIC MISSILE		
		SUBMARINE		
		TYPE 1 DIESEL	6	
		TYPE 2 DIESEL	7	
		TYPE 3 DIESEL	8	
		NUCLEAR SUBMARINE	9	
		GENERAL		
		NUCLEAR ATTACK SUBMARINE	10	
		NUCLEAR MISSILE	11	
		SUBMARINE		
		NUCLEAR BALLISTIC	12	
		MISSILE SUBMARINE		
		TYPE I NUCLEAR	13	
		TYPE II NUCLEAR	14	

FIELD CODING FOR J2.4C1

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

1797	003	SUBSURFACE (MARITIME) PLATFORM (CONTINUED)		
------	-----	--	--	--

TYPE III NUCLEAR	15
TYPE IV NUCLEAR	16
TYPE V NUCLEAR	17
NON-SUBMARINE	18
SURFACE VESSEL	19
TORPEDO	20
MINE	21
DECOY	22
WRECK	23
SEABED PIPELINE	24
FISH/MARINE LIFE	25
SWIMMER/FROGMAN	26
KNUCKLE/WAKE	27
ATTACK SUBMARINE	28
CRUISE MISSILE LAUNCHER	29
PINNACLE/SEAMOUNTAIN	30
NON-MILITARY	31
SUBMERSIBLE	
UNDEFINED	32
TYPE VI NUCLEAR	33
TYPE VII NUCLEAR	34
CONVENTIONAL (COMMAND	35
AND CONTROL)	
CONVENTIONAL (AUXILIARY)	36
NUCLEAR (COMMAND AND	37
CONTROL)	
UNDEFINED	38 THROUGH 48
MISSILE CONTROL UNIT	49
UNDEFINED	50 THROUGH 62
RESET TO NO STATEMENT	63

1798	003	SUBSURFACE (MARITIME) PLATFORM ACTIVITY		
------	-----	--	--	--

NO STATEMENT	0
RECONNAISSANCE	1
OVER THE HORIZON	2
TARGETING (OTHT)	
TRAINING	3
DIVING	4
ANTISURFACE WARFARE	5

THE SUBSURFACE (MARITIME) PLATFORM
ACTIVITY FIELD ALONG WITH THE SUB-
SURFACE (MARITIME) PLATFORM FIELD
FURTHER DEFINES THE IDENTITY OF A
SUBSURFACE (MARITIME) TRACK.

FIELD CODING FOR J2.4C1

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1798	003	SUBSURFACE (MARITIME) PLATFORM (CONTINUED) ACTIVITY		

		ELECTRONIC WARFARE (EW)	6	
		SURVEILLANCE	7	
		SEARCH AND RESCUE (SAR)	8	
		ESCORTING	9	
		MINELAYING	10	
		TRANSITING	11	
		SPECIAL WEAPONS ATTACK	12	
		SURFACING	13	
		AMPHIBIOUS WARFARE	14	
		INTELLIGENCE COLLECTING	15	
		PATROL	16	
		TRANSPORT	17	
		ANTISUBMARINE WARFARE	18	
		(ASW)		
		SHADOWING/INTERVENING	19	
		BOTTOMING	20	
		SPECIAL WARFARE	21	
		STRIKE WARFARE	22	
		CLANDESTINE OPERATIONS	23	
		SNORKELING	24	
		CONVENTIONAL ATTACK	25	
		MINE COUNTERMEASURES	26	
		MINE WARFARE	27	
		MARKING	28	
		NONCOMBATANT OPERATIONS	29	
		DIRECT SUPPORT	30	
		VIDEO DATA LINKING	31	
		(TARGETING)		
		UNDEFINED	32 THROUGH 49	
		RETURN TO BASE (RTB)	50	
		UNDEFINED	51 THROUGH 114	
		SUBSURFACE (MARITIME)	115 THROUGH 126	
		ACTIVITY 1 THROUGH 12		
		RESET TO NO STATEMENT	127	
				A METHOD OF PROVIDING REMOTE TARGETING DATA TO A FIRING PLATFORM/WEAPON.
				A SPECIFIC SUBSURFACE (MARITIME) MISSION DEFINED BY THE JOINT OPERATIONAL COMMANDER.

.....

WORD TITLE: SUBSURFACE (MARITIME) PPLI - MISSION INFORMATION
CONTINUATION WORD

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
			:	LINK 4A ADDRESS														:						
<---			:															:	--->					
			:	13														:						

:	69:	68:	67:	66:	65	64	63	62	61	60	59:	58	57	56	55	54	53	52	51	50	
:	:	VFC:	ARI:	ARI:	:							:									
:	SP	:	IND:	CC	:	VC	:	CONTROL CHANNEL				:	VOICE FREQUENCY/CHANNEL								
:	:	:	:	:	:							:									
:	1	:	1	:	1	:	1	:	7				:	13							

WORD DESCRIPTION

WORD NUMBER: J2.4C2

WORD TITLE: SUBSURFACE (MARITIME) PPLI - MISSION INFORMATION
CONTINUATION WORD

REFERENCE			BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS		RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1	2	01
1551 001	CONTINUATION WORD LABEL	2-	6	5	00010
1717 001	VOICE CALL SIGN INDICATOR (VCS IND)	7		1	
1718 001	LINK 4A ADDRESS INDICATOR (L4A IND)	8		1	
264 001	VOICE CALL SIGN	9-	32	24	
291 001	LINK 4A ADDRESS	33-	45	13	
417 016	VOICE FREQUENCY/CHANNEL	46-	58	13	
348 006	CONTROL CHANNEL	59-	65	7	
1571 003	ACTIVE RELAY INDICATOR, VOICE CHANNEL (ARI VC)	66		1	
1571 004	ACTIVE RELAY INDICATOR, CONTROL CHANNEL (ARI CC)	67		1	
898 001	VOICE FREQUENCY/CHANNEL INDICATOR (VFC IND)	68		1	
756 001	SPARE (SP)	69		1	

FIELD CODING FOR J2.4C2

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1717	001	VOICE CALL SIGN INDICATOR -----		USED TO INDICATE WHETHER OR NOT THE VOICE CALL SIGN FIELD SHOULD BE INTERPRETED.
		DO NOT INTERPRET VOICE CALL SIGN	0	
		INTERPRET VOICE CALL SIGN	1	
1718	001	LINK 4A ADDRESS INDICATOR -----		USED TO INDICATE WHETHER OR NOT THE LINK 4A ADDRESS FIELD SHOULD BE INTERPRETED.
		DO NOT INTERPRET LINK 4A ADDRESS	0	
		INTERPRET LINK 4A ADDRESS	1	
264	001	VOICE CALL SIGN -----		AN ALPHANUMERICALLY-CODED CALL SIGN USED IN VOICE COMMUNICATIONS TO IDENTIFY A FORCE ELEMENT. THE 24 BITS ARE DIVIDED INTO FOUR GROUPS OF 6 BITS. EACH GROUP IS INTERPRETED INDEPENDENTLY IN ACCORDANCE WITH THE FOLLOWING CODE:
		BLANK	0	
		1	1	
		2	2	
		3	3	
		4	4	
		5	5	
		6	6	
		7	7	
		8	8	
		9	9	
		A	10	
		B	11	
		C	12	
		D	13	
		E	14	
		F	15	
		G	16	
		H	17	
		I	18	
		J	19	
		K	20	

FIELD CODING FOR J2.4C2

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
264	001	VOICE CALL SIGN -----	(CONTINUED)	
		L	21	
		M	22	
		N	23	
		O	24	
		P	25	
		Q	26	
		R	27	
		S	28	
		T	29	
		U	30	
		V	31	
		W	32	
		X	33	
		Y	34	
		Z	35	
		UNDEFINED	36 THROUGH 62	
		0 (ZERO)	63	
291	001	LINK 4A ADDRESS -----		THE ADDRESS OF A SPECIFIC AIRCRAFT ON TACTICAL DATA INFORMATION LINK LINK 4A.
		NUMERIC	00000 THROUGH 17777 (OCTAL)	
417	016	VOICE FREQUENCY/CHANNEL -----		IDENTIFIES A UHF VOICE RADIO CHANNEL NUMBER TO ACCOUNT FOR 7000 POSSIBLE RADIO FREQUENCIES IN THE 225 TO 400 MHZ BAND OR THE OPTION OF SELECTING CHANNEL GROUP A OR CHANNEL GROUP B.
		NO STATEMENT	0	
		UHF FREQUENCY	1 THROUGH 7000	THE BIT CODE IS RELATED TO THE UHF FREQUENCY BY USING THE FOLLOWING FORMULA: $\text{FREQ(MHZ)} = 225 + .025(N-1)$ WHERE N = BIT CODE NUMBER.
		ILLEGAL	7001 THROUGH 7039	
		CHANNEL GROUP A	7040 THROUGH 7167	128 CHANNELS FROM 0-127.
		CHANNEL GROUP B	7168 THROUGH 7295	128 CHANNELS FROM 0-127.
		ILLEGAL	7296 THROUGH 8191	
348	006	CONTROL CHANNEL -----		

5.1-409

MIL-STD-6016B

FIELD CODING FOR J2.4C2

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
348	006	CONTROL CHANNEL ----- CONTROL CHANNEL NUMBER NO STATEMENT	(CONTINUED) 0 THROUGH 126 127	
1571	003	ACTIVE RELAY INDICATOR, VOICE CHANNEL ----- RELAYING FUNCTION INACTIVE RELAYING FUNCTION ACTIVE	0 1	INDICATES THE STATUS OF A UNIT'S RE- LAYING CAPABILITY OVER A VOICE CHANNEL.
1571	004	ACTIVE RELAY INDICATOR, CONTROL CHANNEL ----- RELAYING FUNCTION INACTIVE RELAYING FUNCTION ACTIVE	0 1	INDICATES THE STATUS OF A UNIT'S RE- LAYING CAPABILITY OVER A CONTROL CHANNEL.
898	001	VOICE FREQUENCY/CHANNEL INDICATOR ----- PRIMARY VOICE FREQUENCY/ CHANNEL ALTERNATE VOICE FREQUENCY/CHANNEL	0 1	INDICATES WHETHER THE VOICE FREQUENCY/CHANNEL IN THE MESSAGE IS THE PRIMARY OR THE ALTERNATE VOICE FREQUENCY/CHANNEL. THE VOICE FREQUENCY/CHANNEL IS THE PRIMARY VOICE FREQUENCY/CHANNEL. THE VOICE FREQUENCY/CHANNEL IS THE ALTERNATE VOICE FREQUENCY/CHANNEL.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J2.4C3

WORD TITLE: SUBSURFACE (MARITIME) PPLI - RELATIVE NAVIGATION
CONTINUATION WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00	:		
U COORDINATE																	:	:	CONTINUATION WORD				:	WORD	:		
																	:	SP	:	LABEL				:	FORMAT	:	
																	:	:	:					:	:	:	
20																	:	1	:	5				:	2	:	
49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25	:		
<---	:	V COORDINATE																				:			---		
	:																					:					
	:																					:					
	:	20																				:					
					:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50		
					:	RELATIVE				:	RELATIVE				:	BETA ANGLE											
					:	AZIMUTH				:	POSITION				:												
					:	QUALITY				:	QUALITY				:												
					:	3				:	4				:	15											

WORD DESCRIPTION

WORD NUMBER: J2.4C3

WORD TITLE: SUBSURFACE (MARITIME) PPLI - RELATIVE NAVIGATION
CONTINUATION WORD

REFERENCE		BIT #		RESOLUTION, CODING, ETC
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	00011
756 001	SPARE (SP)	7	1	
276 001	U COORDINATE	8-	27 20	
277 001	V COORDINATE	28-	47 20	
284 001	BETA ANGLE	48-	62 15	
278 001	RELATIVE POSITION QUALITY	63-	66 4	
285 001	RELATIVE AZIMUTH QUALITY	67-	69 3	

FIELD CODING FOR J2.4C3

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
276	001	U COORDINATE -----		THE EAST WEST COMPONENT OF POSITION MEASURED IN A U, V CARTESIAN COOR- DINATE SYSTEM WHERE THE U,V PLANE IS TANGENT TO THE EARTH AT ITS ORIGIN. POSITIONS EAST OF THE ORIGIN ARE POSITIVE. POSITIONS WEST OF THE ORIGIN ARE NEGATIVE. IN 1/512 DATA MILE INCREMENTS.
		0 DATA MILES	0	
		+1/512 THROUGH	1 THROUGH 524287	
		+1023 511/512 DATA MILES		
		NO STATEMENT	524288	
		-1023 511/512 THROUGH	524289 THROUGH 1048575	
		-1/512 DATA MILES		
277	001	V COORDINATE -----		THE NORTH SOUTH COMPONENT OF POSI- TION MEASURED IN A U,V CARTESIAN COORDINATE SYSTEM WHERE THE U,V PLANE IS TANGENT TO THE EARTH AT ITS ORIGIN. POSITIONS NORTH OF THE ORIGIN ARE POSITIVE. POSI- TIONS SOUTH OF THE ORIGIN ARE NEGATIVE. IN 1/512 DATA MILE INCREMENTS.
		0 DATA MILES	0	
		+1/512 THROUGH	1 THROUGH 524287	
		+1023 511/512 DATA MILES		
		NO STATEMENT	524288	
		-1023 511/512 THROUGH	524289 THROUGH 1048575	
		-1/512 DATA MILES		
284	001	BETA ANGLE -----		THE ORIENTATION OF THE U,V TANGENT PLANE WITH RESPECT TO TRUE NORTH, I.E., THE ANGLE FORMED BY THE V-AXIS AND TRUE NORTH. COUNTER- CLOCKWISE DISPLACEMENT OF THE V-AXIS IS STATED AS A POSITIVE ANGLE, CLOCKWISE AS A NEGATIVE ANGLE. IN 0.0125 MILLIRADIAN INCREMENTS.
		0 MILLIRADIANS	0	
		+0.0125 THROUGH +204.8 MILLIRADIANS	1 THROUGH 16383	

5.1-414

MIL-STD-6016B

284	001	BETA ANGLE	(CONTINUED)

		NO STATEMENT	16384
		-204.8 THROUGH -0.0125	16385 THROUGH 32767
		MILLIRADIANS	

INDICATES THE LEVEL OF RELATIVE POSITION UNCERTAINTY IN THE U,V TANGENT PLANE AS ESTIMATED BY THE TERMINAL RELATIVE NAVIGATION FUNCTION. THE QUALITY IS STATED AS A NUMERICAL VALUE FROM 0 TO 15 WHERE THE HIGHER VALUES INDICATE THE HIGHER LEVELS OF QUALITY.

>18080 FEET	0
< OR = 18080 FEET	1
< OR = 9040 FEET	2
< OR = 4520 FEET	3
< OR = 2260 FEET	4
< OR = 1600 FEET	5
< OR = 1130 FEET	6
< OR = 800 FEET	7
< OR = 565 FEET	8
< OR = 400 FEET	9
< OR = 282 FEET	10
< OR = 200 FEET	11
< OR = 141 FEET	12
< OR = 100 FEET	13
< OR = 71 FEET	14
NAVIGATION CONTROLLER	15

REFERENCE SOURCE FOR NAVIGATION.

THE QUALITY IS STATED AS A NUMERICAL
VALUE FROM 0 TO 7 WHERE THE HIGHER
VALUES INDICATE THE HIGHER LEVELS
OF QUALITY.

>64 MILLIRADIANS	0
< OR = 64 MILLIRADIANS	1
< OR = 32 MILLIRADIANS	2
< OR = 16 MILLIRADIANS	3
< OR = 8 MILLIRADIANS	4
< OR = 4 MILLIRADIANS	5
< OR = 2 MILLIRADIANS	6
< OR = 1 MILLIRADIAN	7

WORD MAP

WORD NUMBER: J2.4C4

WORD TITLE: SUBSURFACE (MARITIME) PPLI - DISPLACED POSITION CONTINUATION
WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00	:			
LATITUDE, 0.0103 MINUTE														:	SPARE		:	CONTINUATION WORD				:	WORD		:			
														:			:	LABEL				:	FORMAT		:			
20														:	3		:	5				:	2		:			
49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25	:			
LONGITUDE, 0.0103 MINUTE														:	SPARE		:					:			---	>		
21														:	3		:					:						
				:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50	:			
				:	SPARE														:					:			---	>
				:															:					:				
				:	16														:					:				

WORD DESCRIPTION

WORD NUMBER: J2.4C4

WORD TITLE: SUBSURFACE (MARITIME) PPLI - DISPLACED POSITION CONTINUATION
WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT		#	RESOLUTION, CODING, ETC
			POSITION	BITS		
1550	001	WORD FORMAT	0-	1	2	01
1551	001	CONTINUATION WORD LABEL	2-	6	5	00100
756	003	SPARE	7-	9	3	
281	017	LATITUDE, 0.0103 MINUTE	10-	29	20	
756	003	SPARE	30-	32	3	
282	013	LONGITUDE, 0.0103 MINUTE	33-	53	21	
756	016	SPARE	54-	69	16	

FIELD CODING FOR J2.4C4

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
281	017	LATITUDE, 0.0103 MINUTE -----		THE PRECISION IS APPROXIMATELY 63 FEET. IN 90/524,287 DEGREE INCREMENTS.
		0 DEGREES	0	
		+90/524,287 THROUGH +90 DEGREES NORTH	1 THROUGH 524287	
		NO STATEMENT	524288	
		-90 THROUGH -90/524,287 DEGREES SOUTH	524289 THROUGH 1048575	
282	013	LONGITUDE, 0.0103 MINUTE -----		THE PRECISION IS APPROXIMATELY 63 FEET. IN 180/1,048,575 DEGREE INCREMENTS.
		0 DEGREES	0	
		+180/1,048,575 THROUGH +180 DEGREES EAST	1 THROUGH 1048575	
		NO STATEMENT	1048576	
		-180 THROUGH -180/1,048,575 DEGREES WEST	1048577 THROUGH 2097151	

MIL-STD-6016B

J2.5 MESSAGE SUMMARY

PURPOSE

The J2.5 Land (Ground) Point PPLI message is used to provide all JUs information about stationary ground JUs on the Link 16 network. It is used by stationary ground JUs to provide network participation status, identification, positional information and relative navigation information.

DATA ELEMENT SUMMARY

<u>J2.5I</u>		<u>J2.5C1 (Continued)</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	LAND (GROUND) PLATFORM	7
LABEL, J-SERIES	5	ACTIVITY	
SUBLABEL, J-SERIES	3	VOICE FREQUENCY/CHANNEL	13
MESSAGE LENGTH INDICATOR	3	CONTROL CHANNEL	7
EXERCISE INDICATOR	1	ACTIVE RELAY INDICATOR, VOICE	1
DISPLACED POSITION INDICATOR	1	CHANNEL	
FORCE TELL INDICATOR	1	ACTIVE RELAY INDICATOR,	1
EMERGENCY INDICATOR	1	CONTROL CHANNEL	
COMMAND AND CONTROL INDICATOR	1	VOICE FREQUENCY/CHANNEL	1
SIMULATION INDICATOR	1	INDICATOR	
SPARE	2	SPARE	1
ACTIVE RELAY INDICATOR, WIDE	1		
AREA NETWORK			
RTT REPLY STATUS INDICATOR	1	<u>J2.5C3</u>	
NETWORK PARTICIPATION STATUS	4	DATA ELEMENT	# BITS
INDICATOR		WORD FORMAT	2
TIME QUALITY	4	CONTINUATION WORD LABEL	5
GEODETIC POSITION QUALITY	4	SPARE	1
STRENGTH	4	U COORDINATE	20
SPARE	1	V COORDINATE	20
ELEVATION, 25 FT	11	BETA ANGLE	15
SPARE	2	RELATIVE POSITION QUALITY	4
MISSION CORRELATOR	8	RELATIVE AZIMUTH QUALITY	3
ELEVATION QUALITY	4		
SPARE	5	<u>J2.5C4</u>	
		DATA ELEMENT	# BITS
<u>J2.5E0</u>		WORD FORMAT	2
DATA ELEMENT	# BITS	CONTINUATION WORD LABEL	5
WORD FORMAT	2	SPARE	3
LATITUDE, 0.0013 MINUTE	23	LATITUDE, 0.0103 MINUTE	20
LONGITUDE, 0.0013 MINUTE	24	SPARE	3
SPARE	21	LONGITUDE, 0.0103 MINUTE	21
		SPARE	16
<u>J2.5C1</u>		<u>J2.5C6</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	WORD FORMAT	2
CONTINUATION WORD LABEL	5	CONTINUATION WORD LABEL	5
VOICE CALL SIGN INDICATOR	1	TIME TAG, TIME OF VALIDITY	9
SPARE	1	UNIVERSAL TRANSVERSE MERCATOR	5
VOICE CALL SIGN	24	100,000 METER SQUARE ROW	
LAND (GROUND) PLATFORM	6	UNIVERSAL TRANSVERSE MERCATOR	5
		100,000 METER SQUARE COLUMN	

MIL-STD-6016B

J2.5 MESSAGE SUMMARY (Continued)

DATA ELEMENT SUMMARY (Continued)

<u>J2.5C6 (Continued)</u>	
<u>DATA ELEMENT</u>	<u># BITS</u>
UNIVERSAL TRANSVERSE MERCATOR	5
GRID ZONE ROW	
SPARE	1
UNIVERSAL TRANSVERSE MERCATOR	14
10-METER NORTHING	
SPARE	2
UNIVERSAL TRANSVERSE MERCATOR	14
10-METER EASTING	
SPARE	2
UNIVERSAL TRANSVERSE MERCATOR	6
GRID ZONE COLUMN	

MIL-STD-6016B

J2.5 TRANSMIT/RECEIVE RULES

TITLE: Land (Ground) Point PPLI Message

TRANSMIT RULES

1. The J2.5B Land (Ground) Point PPLI basic message consists of the J2.5I Land (Ground) Point PPLI initial word and the J2.5E0 Land (Ground) Point PPLI extension word. The J2.5B basic message shall be transmitted periodically at a RRN = 6 (12 seconds, 8-20 second interval) or, when specified, at the access rate in the time slot assignment by land (ground) JUs when their terminals are operating in the Normal Mode and the Network Participation Status Indicator field is set to one of the following:

- a. Active.
- b. No J0.0 Message Being Received.
- c. High Error Rate.
- d. Tactical Data System (TDS) Failure.

2. Applicable continuation words shall be transmitted in a J2.5I/J2.5E0/J2.5CX word sequence. Only one continuation word shall follow the extension word when only three words are allowed in any one time slot.

3. When the JU is assigned to transmit in the joint PPLI network PG or is neither an active voice relay or active control relay and assigned to transmit in the PPLI A or PPLI B network PG, it shall transmit in each assigned PG a J2.5I/J2.5E0/J2.5C3 word sequence in every second time slot in which a J2.5B message is scheduled for transmission. The intervening transmissions shall be a J2.5I/J2.5E0/J2.5CX word sequence with the sequence of J2.5CX words in the following order:

- a. J2.5C6 Land (Ground) Point PPLI - UTM/UPS Position continuation word.

MIL-STD-6016B

J2.5 TRANSMIT/RECEIVE RULES (Continued)

TRANSMIT RULES (Continued)

b. J2.5C1 Land (Ground) Point PPLI - Amplification/Mission Information continuation word.

c. J2.5C4 Land (Ground) Point PPLI - Displaced Position continuation word.

d. J2.5C1 Land (Ground) Point PPLI - Amplification/Mission Information continuation word.

4. When the JU is either an active voice relay or active control relay and assigned to transmit in either the PPLI A or PPLI B network PG it shall transmit in both PGs a J2.5I/J2.5E0/J2.5C1 word sequence in every second time slot in which a J2.5B message is scheduled for transmission. The intervening transmissions shall be a J2.5I/J2.5E0/J2.5CX word sequence with the sequence of J2.5CX words in the following order:

a. J2.5C6 Land (Ground) Point PPLI - UTM/UPS Position continuation word.

b. J2.5C3 Land (Ground) Point PPLI - Relative Navigation continuation word.

c. J2.5C4 Land (Ground) Point PPLI - Displaced Position continuation word.

d. J2.5C3 Land (Ground) Point PPLI - Relative Navigation continuation word.

5. When data within a J2.5C1, J2.5C3, J2.5C4, or J2.5C6 word change and only three words are allowed in a time slot, a J2.5I/J2.5E0/J2.5CX word sequence shall replace the next Land (Ground) Point PPLI message in the sequence except that a J2.5I/J2.5E0/J2.5C1 word sequence shall not be replaced if the JU is an active voice or active control relay. If more than three words can be transmitted in a time slot, a J2.5I/J2.5E0/J2.5CX/J2.5CX/J2.5CX/J2.5CX

J2.5 TRANSMIT/RECEIVE RULES (Continued)

TRANSMIT RULES (Continued)

etc. word sequence shall be transmitted according to transmit rules 3 and 4 above except that no continuation word shall be repeated in the same time slot.

If any of the continuation words having changed data cannot be transmitted in the next time slot because of the number of transmissions allowed in the time slot, transmission shall occur such that the J2.5C1 word has the first priority, the J2.5C3 word has the second priority, the J2.5C6 word has the third priority, and the J2.5C4 word has the fourth priority.

6. If no data is available for a continuation word then that continuation word shall be deleted from the sequence and the next continuation word in the sequence transmitted. If no data exists for all continuation words, the J2.5B message shall be transmitted.

7. A J2.5I/J2.5E0/J2.5C3 word sequence shall be transmitted with the Network Participation Status Indicator field set to the appropriate condition prior to the terminal taking the action described (Radio Silence, Polling, Inactive) or in the next transmission opportunity after the condition occurs (High Error Rate, No J0.0 Message Being Received, TDS Failure).

8. A J2.5B basic message shall be transmitted in response to a J0.6 Communications Control message in the time slot provided. If the terminal is in the Polling Mode, the RTT Reply Status Indicator field shall be set to not operational.

RECEIVE RULES

All received nonsimulated (Simulation Indicator = 0) and nonrelayed (Relayed Transmission Indicator = 0) J2.5 messages shall be processed in accordance with the requirements for terminal synchronization and relative navigation.

.....

WORD TITLE: LAND (GROUND) POINT PPLI INITIAL WORD

49	48	47	46	45	44	43	42	41	40:	39:	38	37	36	35:	34	33	32	31:	30	29	28	27:	26	25
ELEVATION, 25 FT									:	:	STRENGTH			:	GEODETIC POSITION QUALITY		:	TIME QUALITY			:	NPS IND		
11									:	1	:	4			:	4		:	4			:	4	

:	69	68	67	66	65:	64	63	62	61:	60	59	58	57	56	55	54	53:	52	51:	50	
:						:	ELEVATION		:	MISSION CORRELATOR								:	SP		:
:	SPARE					:	QUALITY		:									:			:
:						:			:									:			:
:						:			:									:			:
:	5					:	4		:	8								:	2		:

WORD DESCRIPTION

WORD NUMBER: J2.5I

WORD TITLE: LAND (GROUND) POINT PPLI INITIAL WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	00
270	004	LABEL, J-SERIES	2-	6 5	00010
271	005	SUBLABEL, J-SERIES	7-	9 3	101
800	001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
385	003	EXERCISE INDICATOR (EX IND)	13	1	
1619	001	DISPLACED POSITION INDICATOR (DP IND)	14	1	
354	002	FORCE TELL INDICATOR (FT IND)	15	1	
355	002	EMERGENCY INDICATOR (EMG IND)	16	1	
893	001	COMMAND AND CONTROL INDICATOR (C2 IND)	17	1	
1604	001	SIMULATION INDICATOR (SIM IND)	18	1	
756	002	SPARE (SP)	19-	20 2	
1571	002	ACTIVE RELAY INDICATOR, WIDE AREA NETWORK (ARI WAN)	21	1	
274	001	RTT REPLY STATUS INDICATOR (RRS)	22	1	
1613	001	NETWORK PARTICIPATION STATUS INDICATOR (NPS IND)	23-	26 4	
279	001	TIME QUALITY	27-	30 4	
283	001	GEODETIC POSITION QUALITY	31-	34 4	
386	013	STRENGTH	35-	38 4	
756	001	SPARE (SP)	39	1	
1612	001	ELEVATION, 25 FT	40-	50 11	
756	002	SPARE (SP)	51-	52 2	
725	003	MISSION CORRELATOR	53-	60 8	
283	003	ELEVATION QUALITY	61-	64 4	
756	005	SPARE	65-	69 5	

FIELD CODING FOR J2.5I

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
385	003	EXERCISE INDICATOR -----		INDICATES WHETHER OR NOT THE MESSAGE IDENTIFIES AN EXERCISE TRACK.
		NON-EXERCISE TRACK	0	
		EXERCISE TRACK OR UNIT	1	
1619	001	DISPLACED POSITION INDICATOR -----		INDICATES WHETHER THE JTIDS/MIDS UNIT'S LOCATION IS CONTAINED IN THE EXTENSION OR CONTINUATION WORD.
		ACTUAL UNIT POSITION CONTAINED IN EXTENSION WORD	0	
		ACTUAL UNIT POSITION CONTAINED IN CONTINUA- TION WORD	1	
354	002	FORCE TELL INDICATOR -----		THIS INDICATOR CAUSES TRACK/POINT DATA TO BE FORCED THROUGH CONTROLLABLE RECEIVE FILTERS.
		NO STATEMENT	0	
		FORCE TELL STATUS	1	
355	002	EMERGENCY INDICATOR -----		USED TO INDICATE WHETHER OR NOT A UNIT OR TRACK HAS AN EMERGENCY.
		NO STATEMENT	0	
		EMERGENCY STATUS	1	
893	001	COMMAND AND CONTROL INDICATOR -----		THIS INDICATOR ALLOWS A JU TO IDENTIFY ITSELF AS A NONC2 OR C2 UNIT.
		NONC2 UNIT	0	THE UNIT BEING REPORTED IS A NONC2 UNIT.
		C2 UNIT	1	THE UNIT BEING REPORTED IS A C2 UNIT.
1604	001	SIMULATION INDICATOR -----		INDICATES WHETHER THE TRACK REFERENCED IN THE MESSAGE IS A REAL OR A SIMULATED TRACK.
		REAL TRACK OR UNIT	0	
		SIMULATED TRACK OR UNIT	1	
1571	002	ACTIVE RELAY INDICATOR, WIDE AREA NETWORK -----		INDICATES THE STATUS OF A UNIT'S RELAYING CAPABILITY OVER THE WIDE-AREA NETWORK.

FIELD CODING FOR J2.5I

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1571	002	ACTIVE RELAY INDICATOR, WIDE AREA NETWORK -----	(CONTINUED)	
		RELAYING FUNCTION	0	
		INACTIVE		
		RELAYING FUNCTION ACTIVE	1	
274	001	RTT REPLY STATUS INDICATOR -----		CONVEYS THE STATUS OF A TERMINAL'S RTT REPLY FUNCTION.
		RTT REPLY FUNCTION	0	
		NORMAL		
		RTT REPLY FUNCTION NOT OPERATIONAL	1	
1613	001	NETWORK PARTICIPATION STATUS INDICATOR -----		INDICATES TO WHAT DEGREE A UNIT IS PARTICIPATING ON THE INTERFACE.
		NO STATEMENT	0	
		ACTIVE-NON SPECIFIC	1	
		INACTIVE-NON SPECIFIC	2	
		CONDITIONAL RADIO	3	
		SILENCE		
		HIGH ERROR RATE	4	
		NO JO.0 MESSAGE BEING RECEIVED	5	
		TACTICAL DATA SYSTEM	6	
		FAILURE		
		POLLING	7	
		UNDEFINED	8 THROUGH 15	
279	001	TIME QUALITY -----		THE QUALITY IS STATED AS A NUMERICAL VALUE FROM 0 TO 15 WHERE THE HIGHER VALUES INDICATE THE HIGHER QUALITIES. QUALITY 0 IS NOT TO BE USED FOR SYNCHRONIZATION OR THE RELATIVE NAVIGATION FUNCTION.
		> 18080 NANOSECONDS	0	
		< OR = 18080 NANOSECONDS	1	
		< OR = 9040 NANOSECONDS	2	
		< OR = 4520 NANOSECONDS	3	
		< OR = 2260 NANOSECONDS	4	
		< OR = 1600 NANOSECONDS	5	
		< OR = 1130 NANOSECONDS	6	
		< OR = 800 NANOSECONDS	7	
		< OR = 565 NANOSECONDS	8	

FIELD CODING FOR J2.5I

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

279	001	TIME QUALITY	(CONTINUED)	
-----	-----	--------------	-------------	--

< OR = 400 NANOSECONDS	9
< OR = 282 NANOSECONDS	10
< OR = 200 NANOSECONDS	11
< OR = 141 NANOSECONDS	12
< OR = 100 NANOSECONDS	13
< OR = 71 NANOSECONDS	14
NET TIME REFERENCE	15

283	001	GEODETIC POSITION QUALITY		
-----	-----	---------------------------	--	--

THE LEVEL OF GEODETIC POSITION
UNCERTAINTY AS ESTIMATED BY THE
TERMINAL NAVIGATION FUNCTION.

>18080 FT	0
< OR = TO 18080 FT	1
< OR = TO 9040 FT	2
< OR = TO 4520 FT	3
< OR = TO 2260 FT	4
< OR = TO 1600 FT	5
< OR = TO 1130 FT	6
< OR = TO 800 FT	7
< OR = TO 565 FT	8
< OR = TO 400 FT	9
< OR = TO 282 FT	10
< OR = TO 200 FT	11
< OR = TO 141 FT	12
< OR = TO 100 FT	13
< OR = TO 71 FT	14
< OR = TO 50 FT	15

386	013	STRENGTH		
-----	-----	----------	--	--

EXPRESSES THE NUMBER OF ENTITIES
REPRESENTED BY A SINGLE TRACK.

NO STATEMENT	0
1 UNIT	1
2 UNITS	2
3 UNITS	3
4 UNITS	4
5 UNITS	5
6 UNITS	6
7 UNITS	7
8 UNITS	8
9 UNITS	9
10 UNITS	10
11 UNITS	11
12 UNITS	12

FIELD CODING FOR J2.5I (SHEET 4)				
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
386	013	STRENGTH ----- 2 THROUGH 7 (FEW) UNITS GREATER THAN 7 (MANY) UNITS GREATER THAN 12 UNITS	(CONTINUED) 13 14 15	
1612	001	ELEVATION, 25 FT ----- 0 THROUGH 51,150 FEET ELEVATION UNKNOWN	 0 THROUGH 2046 2047	THE ELEVATION IN FEET OF AN OBJECT OR POINT AS MEASURED OUTWARD FROM THE EARTH AS A POSITIVE QUANTITY ABOVE MEAN SEA LEVEL (MSL). IN 25 FOOT INCREMENTS.
725	003	MISSION CORRELATOR ----- NO STATEMENT NUMERIC	 0 1 THROUGH 255	SPECIFIES THE IDENTIFYING NUMBER ASSIGNED TO AN OVERALL MISSION. THIS ENABLES PARTICIPANTS WITH DIFFERENT OBJECTIVES ON SPECIFIC MISSIONS TO BE ASSOCIATED WITH THE SAME OVERALL MISSION.
283	003	ELEVATION QUALITY ----- >18080 FT < OR = TO 18080 FT < OR = TO 9040 FT < OR = TO 4520 FT < OR = TO 2260 FT < OR = TO 1600 FT < OR = TO 1130 FT < OR = TO 800 FT < OR = TO 565 FT < OR = TO 400 FT < OR = TO 282 FT < OR = TO 200 FT < OR = TO 141 FT < OR = TO 100 FT < OR = TO 71 FT < OR = TO 50 FT	 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15	THE LEVEL OF HEIGHT UNCERTAINTY AS ESTIMATED BY THE TERMINAL NAVIGATION FUNCTION.

WORD MAP

WORD NUMBER: J2.5E0

WORD TITLE: LAND (GROUND) POINT PPLI EXTENSION WORD

:	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	:	01	00	:
:																								:	WORD	:	
:	LATITUDE, 0.0013 MINUTE																							:	FORMAT	:	
:																								:		:	
:	23																							:	2	:	

49:	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25:	
<---	:	LONGITUDE, 0.0013 MINUTE																							:
:																								:	
:	24																							:	

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50
:																				
:	SPARE																			
:																				
:	21																			

WORD DESCRIPTION

WORD NUMBER: J2.5E0
WORD TITLE: LAND (GROUND) POINT PPLI EXTENSION WORD

REFERENCE		BIT #		RESOLUTION, CODING, ETC
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	
1550 001	WORD FORMAT	0-	1 2	10
281 015	LATITUDE, 0.0013 MINUTE	2-	24 23	
282 015	LONGITUDE, 0.0013 MINUTE	25-	48 24	
756 021	SPARE	49-	69 21	

FIELD CODING FOR J2.5E0 (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
281	015	LATITUDE, 0.0013 MINUTE -----		THE PRECISION IS APPROXIMATELY 8 FEET. IN 90/4,194,303 DEGREE INCREMENTS.
		0 DEGREES	0	
		+90/4,194,303 THROUGH +90 DEGREES NORTH	1 THROUGH 4194303	
		NO STATEMENT	4194304	
		-90 THROUGH -90/4,194,303 DEGREES SOUTH	4194305 THROUGH 8388607	
282	015	LONGITUDE, 0.0013 MINUTE -----		THE PRECISION IS APPROXIMATELY 8 FEET. IN 180/8,388,607 DEGREE INCREMENTS.
		0 DEGREES	0	
		+180/8,388,607 THROUGH +180 DEGREES EAST	1 THROUGH 8388607	
		NO STATEMENT	8388608	
		-180 THROUGH -180/8,388,607 DEGREES WEST	8388609 THROUGH 16777215	

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J2.5C1

WORD TITLE: LAND (GROUND) POINT PPLI - AMPLIFICATION/MISSION INFORMATION
CONTINUATION WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00	:																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
VOICE CALL SIGN															:	:	VCS:	CONTINUATION WORD	:	WORD	:																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																							
															:	SP	:	IND:	:	LABEL	:	FORMAT	:																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
															:	:	:	:	:	:	:	:	:																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
24															:	1	:	1	:	5	:	2	:																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
49	48	47	46	:	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25	:																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
<---			:	LAND (GROUND) PLATFORM							:								:											---																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
			:	ACTIVITY							:	LAND (GROUND) PLATFORM							:																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
			:								:								:																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
			:	7							:	6							:																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
				:	69	:	68	:	67	:	66	:	65	:	64	:	63	:	62	:	61	:	60	:	59	:	58	:	57	:	56	:	55	:	54	:	53	:	52	:	51	:	50	:																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																
				:	:	:	VFC:	ARI:	ARI:	:								:											:																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
				:	SP	:	IND:	CC	:	VC	:	CONTROL CHANNEL							:	VOICE FREQUENCY/CHANNEL																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								
				:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:

WORD DESCRIPTION

WORD NUMBER: J2.5C1

WORD TITLE: LAND (GROUND) POINT PPLI - AMPLIFICATION/MISSION INFORMATION
CONTINUATION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	01
1551	001	CONTINUATION WORD LABEL	2-	6 5	00001
1717	001	VOICE CALL SIGN INDICATOR (VCS IND)	7	1	
756	001	SPARE (SP)	8	1	
264	001	VOICE CALL SIGN	9-	32 24	
1797	004	LAND (GROUND) PLATFORM	33-	38 6	
1798	004	LAND (GROUND) PLATFORM ACTIVITY	39-	45 7	
417	016	VOICE FREQUENCY/CHANNEL	46-	58 13	
348	006	CONTROL CHANNEL	59-	65 7	
1571	003	ACTIVE RELAY INDICATOR, VOICE CHANNEL (ARI VC)	66	1	
1571	004	ACTIVE RELAY INDICATOR, CONTROL CHANNEL (ARI CC)	67	1	
898	001	VOICE FREQUENCY/CHANNEL INDICATOR (VFC IND)	68	1	
756	001	SPARE (SP)	69	1	

FIELD CODING FOR J2.5C1

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1717	001	VOICE CALL SIGN INDICATOR -----		USED TO INDICATE WHETHER OR NOT THE VOICE CALL SIGN FIELD SHOULD BE INTERPRETED.
		DO NOT INTERPRET VOICE CALL SIGN	0	
		INTERPRET VOICE CALL SIGN	1	
264	001	VOICE CALL SIGN -----		AN ALPHANUMERICALLY-CODED CALL SIGN USED IN VOICE COMMUNICATIONS TO IDENTIFY A FORCE ELEMENT. THE 24 BITS ARE DIVIDED INTO FOUR GROUPS OF 6 BITS. EACH GROUP IS INTERPRETED INDEPENDENTLY IN ACCORDANCE WITH THE FOLLOWING CODE:
		BLANK	0	
		1	1	
		2	2	
		3	3	
		4	4	
		5	5	
		6	6	
		7	7	
		8	8	
		9	9	
		A	10	
		B	11	
		C	12	
		D	13	
		E	14	
		F	15	
		G	16	
		H	17	
		I	18	
		J	19	
		K	20	
		L	21	
		M	22	
		N	23	
		O	24	
		P	25	
		Q	26	
		R	27	
		S	28	

FIELD CODING FOR J2.5C1

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

264	001	VOICE CALL SIGN -----	(CONTINUED)	
		T	29	
		U	30	
		V	31	
		W	32	
		X	33	
		Y	34	
		Z	35	
		UNDEFINED	36 THROUGH 62	
		0 (ZERO)	63	

1797	004	LAND (GROUND) PLATFORM -----		
------	-----	---------------------------------	--	--

THE LAND (GROUND) PLATFORM FIELD
ALONG WITH THE LAND (GROUND)
PLATFORM ACTIVITY FIELD FURTHER
DEFINES THE IDENTITY OF A
LAND(GROUND) POINT OR TRACK.

NO STATEMENT	0
TROOP CONCENTRATION/UNIT	1
HEADQUARTER COMPLEX	2
COMMAND/CONTROL/COMMAND AND CONTROL CENTER	3
ASSEMBLY AREA	4
INSTALLATION/FACILITY, MILITARY	5
INSTALLATION/FACILITY, CIVILIAN	6
AIRFIELD/AIRBASE	7
PORT/HARBOR FACILITY	8
STORAGE SITE	9
TACTICAL POSITION	10
FORTIFICATION	11
INTERSECTION	12
CONVOY	13
COMBAT VEHICLE	14
COMBAT SUPPORT VEHICLE	15
VEHICLE, OTHER	16
TANK	17
TRAIN	18
REMOTELY PILOTED VEHICLE	19
MORTAR	20
FIELD ARTILLERY	21
AIR DEFENSE ARTILLERY	22
ROCKET LAUNCHER	23
MISSILE LAUNCHER	24

FIELD CODING FOR J2.5C1

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1797	004	LAND (GROUND) PLATFORM	(CONTINUED)	

		SPECIAL WEAPON	25	
		BRIDGE	26	
		BUILDING/STRUCTURE	27	
		POWER FACILITY	28	
		RAIL FACILITY	29	
		TERRAIN	30	
		NAVAID SITE	31	
		COMMUNICATION SITE	32	
		RADAR SITE	33	
		ANTENNA/EMITTER	34	
		BUFFER CENTER	35	
		ELECTRONIC WARFARE SITE	36	
		SURVEILLANCE SITE	37	
		BRIDGING EQUIPMENT	38	
		MINE WARFARE EQUIPMENT	39	
		SURFACE-TO-AIR MISSILE	40	
		(SAM) SITE		
		MARITIME HEADQUARTERS	41	
		AIR SUPPORT RADAR TEAM	42	
		(ASRT)		
		DIRECT AIR SUPPORT	43	
		CENTER (DASC)		
		FORWARD AIR CONTROL	44	
		PARTY (FACP)		
		BATTALION OPERATIONS	45	
		CENTER (BOC)		
		TACTICAL DATA SYSTEM	46	
		(TDS)		
		DECOY	47	
		TRACKED VEHICLE	48	
		THEATER HIGH ALTITUDE	49	
		AREA DEFENSE (THAAD)		
		JOINT TACTICAL GROUND	50	
		STATION (JTGS)		
		ARMOR	51	
		CAVALRY	52	
		ENGINEER	53	
		AIRBORNE/SPECIAL	54	
		OPERATIONS		
		AVIATION	55	
		AIR DEFENSE SITE	56	
		BALLISTIC MISSILE	57	
		DEFENSE SITE		

FIELD CODING FOR J2.5C1

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1797	004	LAND (GROUND) PLATFORM -----	(CONTINUED)	
		UNDEFINED RESET TO NO STATEMENT	58 THROUGH 62 63	
1798	004	LAND (GROUND) PLATFORM ACTIVITY -----		THE LAND (GROUND) PLATFORM ACTIVITY FIELD ALONG WITH THE LAND (GROUND) PLATFORM FIELD FURTHER DEFINES THE IDENTITY OF A LAND (GROUND) POINT OR TRACK.
		NO STATEMENT	0	
		HOLDING	1	
		DELAYING	2	
		MOVING	3	
		DETECTING	4	
		ACQUIRING	5	
		ENGAGING	6	
		ADVANCING	7	
		ANTI-AIR ATTACK	8	
		AMPHIBIOUS ASSAULT	9	
		FIRING/LAUNCHING	10	
		CONVENTIONAL ATTACK/ ASSAULT	11	
		SPECIAL WEAPONS ATTACK	12	
		DEMOLITION	13	
		OVER THE HORIZON TARGETING	14	
		TRANSITING	15	
		RETURN TO BASE	16	
		DEPLOYING	17	
		EMISSION CONTROL (EMCON)	18	
		RIVER CROSSING	19	
		LOADING	20	
		TOWING	21	
		BUILDING FORTIFICATION/ BARRIER	22	
		CLEARING BARRIER	23	
		RECOVERING EQUIPMENT	24	
		MINE SWEEPING	25	
		MINE LAYING	26	
		JAMMING	27	
		RECONNAISSANCE/ PATROLLING	28	
		SEARCH AND RESCUE (SAR)	29	
		TRAINING	30	

FIELD CODING FOR J2.5C1

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1798	004	LAND (GROUND) PLATFORM ACTIVITY -----	(CONTINUED)	
		MEDICAL EVACUATION (MEDEVAC)	31	
		ESCORTING	32	
		TRANSPORTING	33	
		SCREENING	34	
		SUPPORTING	35	
		REPAIRING	36	
		REFUELING	37	
		NEUTRALIZING	38	
		TARGETING	39	
		BYPASSING	40	
		CLOSING	41	
		CONCENTRATING	42	
		DEFENDING	43	
		DISENGAGING	44	
		INFILTRATING	45	
		INTERDICTING	46	
		LANDING	47	
		OCCUPYING	48	
		DISPERSING	49	
		SUPPLY/RESUPPLY	50	
		RETROGRADE/WITHDRAWING	51	
		TRANSMITTING	52	
		ELECTRONIC WARFARE	53	
		SUPPORT (ES)		
		ELECTRONIC ATTACK (EA)	54	
		MOVING EQUIPMENT	55	
		POWER UP AND MANNED, NOT EMITTING	56	
		PREPARATION FOR LAUNCH	57	
		SITE SHUT DOWN TO UNPOWERED STATUS	58	
		UNDEFINED	59 THROUGH 114	
		LAND (GROUND) ACTIVITY 1 THROUGH 12	115 THROUGH 126	A SPECIFIC LAND (GROUND) MISSION DEFINED BY THE JOINT OPERATIONAL COMMANDER.
		RESET TO NO STATEMENT	127	
417	016	VOICE FREQUENCY/CHANNEL -----		IDENTIFIES A UHF VOICE RADIO CHANNEL NUMBER TO ACCOUNT FOR 7000 POSSIBLE RADIO FREQUENCIES IN THE 225 TO 400 MHZ BAND OR THE OPTION

FIELD CODING FOR J2.5C1

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
417	016	VOICE FREQUENCY/CHANNEL -----	(CONTINUED)	
		NO STATEMENT UHF FREQUENCY	0 1 THROUGH 7000	OF SELECTING CHANNEL GROUP A OR CHANNEL GROUP B. THE BIT CODE IS RELATED TO THE UHF FREQUENCY BY USING THE FOLLOWING FORMULA: FREQ(MHZ) = 225 + .025(N-1) WHERE N = BIT CODE NUMBER.
		ILLEGAL CHANNEL GROUP A CHANNEL GROUP B ILLEGAL	7001 THROUGH 7039 7040 THROUGH 7167 7168 THROUGH 7295 7296 THROUGH 8191	128 CHANNELS FROM 0-127. 128 CHANNELS FROM 0-127.
348	006	CONTROL CHANNEL -----		
		CONTROL CHANNEL NUMBER NO STATEMENT	0 THROUGH 126 127	
1571	003	ACTIVE RELAY INDICATOR, VOICE CHANNEL -----		INDICATES THE STATUS OF A UNIT'S RE- LAYING CAPABILITY OVER A VOICE CHANNEL.
		RELAYING FUNCTION INACTIVE RELAYING FUNCTION ACTIVE	0 1	
1571	004	ACTIVE RELAY INDICATOR, CONTROL CHANNEL -----		INDICATES THE STATUS OF A UNIT'S RE- LAYING CAPABILITY OVER A CONTROL CHANNEL.
		RELAYING FUNCTION INACTIVE RELAYING FUNCTION ACTIVE	0 1	
898	001	VOICE FREQUENCY/CHANNEL INDICATOR -----		INDICATES WHETHER THE VOICE FREQUENCY/CHANNEL IN THE MESSAGE IS THE PRIMARY OR THE ALTERNATE VOICE FREQUENCY/CHANNEL. THE VOICE FREQUENCY/CHANNEL IS THE PRIMARY VOICE FREQUENCY/CHANNEL. THE VOICE FREQUENCY/CHANNEL IS THE ALTERNATE VOICE FREQUENCY/CHANNEL.
		PRIMARY VOICE FREQUENCY/ CHANNEL ALTERNATE VOICE FREQUENCY/CHANNEL	0 1	

5.1-441

MIL-STD-6016B

WORD MAP

WORD NUMBER: J2.5C3

WORD TITLE: LAND (GROUND) POINT PPLI - RELATIVE NAVIGATION CONTINUATION
WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00	:	
U COORDINATE																	:	:	CONTINUATION WORD				:	WORD	:	
																	:	SP	:	LABEL				:	FORMAT	:
																	:	:	:					:	:	:
20																	:	1	:	5				:	2	:
49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25	:	
<---		:	V COORDINATE																			:	---			
		:																				:				
		:																				:				
		:	20																			:				
					:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50	
					:	RELATIVE				:	RELATIVE				:	BETA ANGLE										
					:	AZIMUTH				:	POSITION				:											
					:	QUALITY				:	QUALITY				:											
					:	3				:	4				:	15										

WORD DESCRIPTION

WORD NUMBER: J2.5C3

WORD TITLE: LAND (GROUND) POINT PPLI - RELATIVE NAVIGATION CONTINUATION
WORD

REFERENCE			BIT	#	
DFI/DUI	DATA FIELD	DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD	FORMAT	0-	1 2	01
1551 001	CONTINUATION	WORD LABEL	2-	6 5	00011
756 001	SPARE	(SP)	7	1	
276 001	U	COORDINATE	8-	27 20	
277 001	V	COORDINATE	28-	47 20	
284 001	BETA	ANGLE	48-	62 15	
278 001	RELATIVE	POSITION QUALITY	63-	66 4	
285 001	RELATIVE	AZIMUTH QUALITY	67-	69 3	

FIELD CODING FOR J2.5C3

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
276	001	U COORDINATE -----		THE EAST WEST COMPONENT OF POSITION MEASURED IN A U, V CARTESIAN COOR- DINATE SYSTEM WHERE THE U,V PLANE IS TANGENT TO THE EARTH AT ITS ORIGIN. POSITIONS EAST OF THE ORIGIN ARE POSITIVE. POSITIONS WEST OF THE ORIGIN ARE NEGATIVE. IN 1/512 DATA MILE INCREMENTS.
		0 DATA MILES	0	
		+1/512 THROUGH	1 THROUGH 524287	
		+1023 511/512 DATA MILES		
		NO STATEMENT	524288	
		-1023 511/512 THROUGH	524289 THROUGH 1048575	
		-1/512 DATA MILES		
277	001	V COORDINATE -----		THE NORTH SOUTH COMPONENT OF POSI- TION MEASURED IN A U,V CARTESIAN COORDINATE SYSTEM WHERE THE U,V PLANE IS TANGENT TO THE EARTH AT ITS ORIGIN. POSITIONS NORTH OF THE ORIGIN ARE POSITIVE. POSI- TIONS SOUTH OF THE ORIGIN ARE NEGATIVE. IN 1/512 DATA MILE INCREMENTS.
		0 DATA MILES	0	
		+1/512 THROUGH	1 THROUGH 524287	
		+1023 511/512 DATA MILES		
		NO STATEMENT	524288	
		-1023 511/512 THROUGH	524289 THROUGH 1048575	
		-1/512 DATA MILES		
284	001	BETA ANGLE -----		THE ORIENTATION OF THE U,V TANGENT PLANE WITH RESPECT TO TRUE NORTH, I.E., THE ANGLE FORMED BY THE V-AXIS AND TRUE NORTH. COUNTER- CLOCKWISE DISPLACEMENT OF THE V-AXIS IS STATED AS A POSITIVE ANGLE, CLOCKWISE AS A NEGATIVE ANGLE. IN 0.0125 MILLIRADIAN INCREMENTS.
		0 MILLIRADIANS	0	
		+0.0125 THROUGH +204.8 MILLIRADIANS	1 THROUGH 16383	

284	001	BETA ANGLE	(CONTINUED)

		NO STATEMENT	16384
		-204.8 THROUGH -0.0125	16385 THROUGH 32767
		MILLIRADIANS	

INDICATES THE LEVEL OF RELATIVE POSITION UNCERTAINTY IN THE U,V TANGENT PLANE AS ESTIMATED BY THE TERMINAL RELATIVE NAVIGATION FUNCTION. THE QUALITY IS STATED AS A NUMERICAL VALUE FROM 0 TO 15 WHERE THE HIGHER VALUES INDICATE THE HIGHER LEVELS OF QUALITY.

>18080 FEET	0
< OR = 18080 FEET	1
< OR = 9040 FEET	2
< OR = 4520 FEET	3
< OR = 2260 FEET	4
< OR = 1600 FEET	5
< OR = 1130 FEET	6
< OR = 800 FEET	7
< OR = 565 FEET	8
< OR = 400 FEET	9
< OR = 282 FEET	10
< OR = 200 FEET	11
< OR = 141 FEET	12
< OR = 100 FEET	13
< OR = 71 FEET	14
NAVIGATION CONTROLLER	15

REFERENCE SOURCE FOR NAVIGATION.

THE QUALITY IS STATED AS A NUMERICAL
VALUE FROM 0 TO 7 WHERE THE HIGHER
VALUES INDICATE THE HIGHER LEVELS
OF QUALITY.

>64 MILLIRADIANS	0
< OR = 64 MILLIRADIANS	1
< OR = 32 MILLIRADIANS	2
< OR = 16 MILLIRADIANS	3
< OR = 8 MILLIRADIANS	4
< OR = 4 MILLIRADIANS	5
< OR = 2 MILLIRADIANS	6
< OR = 1 MILLIRADIAN	7

WORD MAP

WORD NUMBER: J2.5C4

WORD TITLE: LAND (GROUND) POINT PPLI - DISPLACED POSITION CONTINUATION
WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00	:			
LATITUDE, 0.0103 MINUTE														:	SPARE		:	CONTINUATION WORD				:	WORD		:			
														:			:	LABEL				:	FORMAT		:			
20														:	3		:	5				:	2		:			
49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25	:			
LONGITUDE, 0.0103 MINUTE														:	SPARE		:					:			---	>		
														:			:					:						
21														:	3		:					:						
				:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	:	53	52	51	50	:		
				:	SPARE														:					:			---	>
				:															:					:				
				:	16														:					:				

WORD DESCRIPTION

WORD NUMBER: J2.5C4

WORD TITLE: LAND (GROUND) POINT PPLI - DISPLACED POSITION CONTINUATION
WORD

REFERENCE		BIT #		RESOLUTION, CODING, ETC
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	00100
756 003	SPARE	7-	9 3	
281 017	LATITUDE, 0.0103 MINUTE	10-	29 20	
756 003	SPARE	30-	32 3	
282 013	LONGITUDE, 0.0103 MINUTE	33-	53 21	
756 016	SPARE	54-	69 16	

FIELD CODING FOR J2.5C4 (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
281	017	LATITUDE, 0.0103 MINUTE -----		THE PRECISION IS APPROXIMATELY 63 FEET. IN 90/524,287 DEGREE INCREMENTS.
		0 DEGREES	0	
		+90/524,287 THROUGH +90 DEGREES NORTH	1 THROUGH 524287	
		NO STATEMENT	524288	
		-90 THROUGH -90/524,287 DEGREES SOUTH	524289 THROUGH 1048575	
282	013	LONGITUDE, 0.0103 MINUTE -----		THE PRECISION IS APPROXIMATELY 63 FEET. IN 180/1,048,575 DEGREE INCREMENTS.
		0 DEGREES	0	
		+180/1,048,575 THROUGH +180 DEGREES EAST	1 THROUGH 1048575	
		NO STATEMENT	1048576	
		-180 THROUGH -180/1,048,575 DEGREES WEST	1048577 THROUGH 2097151	

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: LAND (GROUND) POINT PPLI - UTM/UPS POSITION CONTINUATION
WORD

:	69	68	67	66	65	64:	63	62:	61	60	59	58	57	56	55	54	53	52	51	50
:	UNIVERSAL TRANSVERSE					:		:	UNIVERSAL TRANSVERSE MERCATOR 10-METER EASTING											
:	MERCATOR GRID ZONE					:	SP	:												
:	COLUMN					:		:												
:	6					:	2	:	14											

WORD DESCRIPTION

WORD NUMBER: J2.5C6

WORD TITLE: LAND (GROUND) POINT PPLI - UTM/UPS POSITION CONTINUATION
WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	01
1551	001	CONTINUATION WORD LABEL	2-	6 5	00110
826	001	TIME TAG, TIME OF VALIDITY (TTG TOV)	7-	15 9	
816	001	UNIVERSAL TRANSVERSE MERCATOR 100,000 METER SQUARE ROW (UTM MSR)	16-	20 5	
821	001	UNIVERSAL TRANSVERSE MERCATOR 100,000 METER SQUARE COLUMN (UTM MSC)	21-	25 5	
825	001	UNIVERSAL TRANSVERSE MERCATOR GRID ZONE ROW (UTM GZR)	26-	30 5	
756	001	SPARE (SP)	31	1	
820	001	UNIVERSAL TRANSVERSE MERCATOR 10-METER NORTHING	32-	45 14	
756	002	SPARE (SP)	46-	47 2	
819	001	UNIVERSAL TRANSVERSE MERCATOR 10-METER EASTING	48-	61 14	
756	002	SPARE (SP)	62-	63 2	
818	001	UNIVERSAL TRANSVERSE MERCATOR GRID ZONE COLUMN (UTM GZC)	64-	69 6	

FIELD CODING FOR J2.5C6

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
826	001	TIME TAG, TIME OF VALIDITY -----		IDENTIFIES THE GROUP OF 24 (8 TIME SLOTS * 3 SETS) CONSECUTIVE TIME SLOT SETS DURING WHICH THE UTM/UPS POSITION IS VALID. EACH VALUE DEFINES A TIME SPAN OF 24 * 0.0078125 SECONDS = 0.1875 SECONDS. THE VALUE CORRESPONDS TO BITS 5 THROUGH 13 OF THE TIME SLOT NUMBER THUS DESIGNATING A GROUP OF 24 CONSECUTIVE TIME SLOT NUMBERS IDENTIFIED BY BITS 2 THROUGH 4 (8 TIME SLOTS) AND BITS 0 THROUGH 1 (3 SETS; A, B, AND C) OF THE TIME SLOT NUMBER. EACH VALUE CAN DEFINE EIGHT PERIODS DURING AN EPOCH DEPENDING ON THE VALUE OF BITS 14 THROUGH 16 OF THE TIME SLOT NUMBER.
		NUMERIC	0 THROUGH 511	
816	001	UNIVERSAL TRANSVERSE MERCATOR 100,000 METER SQUARE ROW -----		THE NORTH-SOUTH DESIGNATION FOR A 100,000 METER GRID OF A SPECIFIED UNIVERSAL TRANSVERSE MERCATOR (UTM) GRID ZONE ROW.
		NO STATEMENT	0	
		A	1	
		B	2	
		C	3	
		D	4	
		E	5	
		F	6	
		G	7	
		H	8	
		ILLEGAL	9	BIT CODE 9 IS ILLEGAL BECAUSE THE GRID DOES NOT USE THE LETTER I.
		J	10	
		K	11	
		L	12	
		M	13	
		N	14	
		ILLEGAL	15	BIT CODE 15 IS ILLEGAL BECAUSE THE GRID DOES NOT USE THE LETTER O.
		P	16	
		Q	17	
		R	18	

FIELD CODING FOR J2.5C6

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
816	001	UNIVERSAL TRANSVERSE MERCATOR 100,000 METER SQUARE ROW -----	(CONTINUED)	
		S	19	
		T	20	
		U	21	
		V	22	
		W	23	
		X	24	
		Y	25	
		Z	26	
		ILLEGAL	27 THROUGH 31	
821	001	UNIVERSAL TRANSVERSE MERCATOR 100,000 METER SQUARE COLUMN -----		THE EAST-WEST DESIGNATION FOR A 100,000-METER GRID OF A SPECIFIED UNIVERSAL TRANSVERSE MERCATOR (UTM) GRID ZONE COLUMN.
		NO STATEMENT	0	
		A	1	
		B	2	
		C	3	
		D	4	
		E	5	
		F	6	
		G	7	
		H	8	
		ILLEGAL	9	BIT CODE 9 IS ILLEGAL BECAUSE THE GRID DOES NOT USE THE LETTER I.
		J	10	
		K	11	
		L	12	
		M	13	
		N	14	
		ILLEGAL	15	BIT CODE 15 IS ILLEGAL BECAUSE THE GRID DOES NOT USE THE LETTER O.
		P	16	
		Q	17	
		R	18	
		S	19	
		T	20	
		U	21	
		V	22	
		W	23	
		X	24	
		Y	25	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
821	001	UNIVERSAL TRANSVERSE MERCATOR 100,000 METER SQUARE COLUMN ----- Z ILLEGAL	(CONTINUED) 26 27 THROUGH 31	
825	001	UNIVERSAL TRANSVERSE MERCATOR GRID ZONE ROW -----		IN THE UNIVERSAL TRANSVERSE MERCATOR (UTM) SYSTEM, AN AREA ON THE EARTH'S SURFACE FROM 80 DEGREES SOUTH LATITUDE AND 84 DEGREES NORTH LATITUDE MEASURING 8 DEGREES NORTH-SOUTH WHICH EXTENDS EAST- WEST FOR 360 DEGREES ORIGINATING AT THE 180-DEGREE MERIDIAN (EXCEPT THE ROW OR BAND FROM 72 TO 84 DEGREES NORTH, WHICH COVERS 12 DEGREES NORTH-SOUTH).
		NO STATEMENT	0	
		A	1	
		B	2	
		C	3	
		D	4	
		E	5	
		F	6	
		G	7	
		H	8	
		ILLEGAL	9	BIT CODE 9 IS ILLEGAL BECAUSE THE GRID DOES NOT USE THE LETTER I.
		J	10	
		K	11	
		L	12	
		M	13	
		N	14	
		ILLEGAL	15	BIT CODE 15 IS ILLEGAL BECAUSE THE GRID DOES NOT USE THE LETTER O.
		P	16	
		Q	17	
		R	18	
		S	19	
		T	20	
		U	21	
		V	22	
		W	23	
		X	24	
		Y	25	

FIELD CODING FOR J2.5C6

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
825	001	UNIVERSAL TRANSVERSE MERCATOR GRID ZONE ROW ----- Z ILLEGAL	(CONTINUED) 26 27 THROUGH 31	
820	001	UNIVERSAL TRANSVERSE MERCATOR 10-METER NORTHING ----- 0 THROUGH 99,990 METERS ILLEGAL	 0 THROUGH 9999 10000 THROUGH 16383	THE NUMERICAL PART OF THE UNIVERSAL TRANSVERSE MERCATOR (UTM) GRID REFERENCE WHICH INDICATES THE NORTHING COORDINATE TO THE CLOSEST 10 METERS. IN 10 METER INCREMENTS.
819	001	UNIVERSAL TRANSVERSE MERCATOR 10-METER EASTING ----- 0 THROUGH 99,990 METERS ILLEGAL	 0 THROUGH 9999 10000 THROUGH 16383	THE NUMERICAL PART OF THE UNIVERSAL TRANSVERSE MERCATOR (UTM) GRID REFERENCE WHICH INDICATES THE EASTING COORDINATE TO THE CLOSEST 10 METERS. IN 10 METER INCREMENTS.
818	001	UNIVERSAL TRANSVERSE MERCATOR GRID ZONE COLUMN ----- NO STATEMENT UTM GRID ZONE COLUMN UNDEFINED	 0 1 THROUGH 60 61 THROUGH 63	IN THE UNIVERSAL TRANSVERSE MERCATOR (UTM) SYSTEM, AN AREA ON THE EARTH'S SURFACE BETWEEN NORTH- SOUTH COLUMNS MEASURING DEGREES EAST-WEST FROM 80 DEGREES SOUTH LATITUDE TO 84 DEGREES NORTH LATITUDE ORIGINATING AT THE 180- DEGREE MERIDIAN.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

J2.6 MESSAGE SUMMARY

The J2.6 Land (Ground) Track PPLI message is used to provide all JUs information about mobile ground JUs on the Link 16 network. It is used by mobile ground JUs to provide network participation status, identification, positional information, and relative navigation information.

<u>J2.6I</u>		<u>J2.6C1 (Continued)</u>	
<u>DATA ELEMENT</u>	<u># BITS</u>	<u>DATA ELEMENT</u>	<u># BITS</u>
WORD FORMAT	2	LAND (GROUND) PLATFORM	6
LABEL, J-SERIES	5	LAND (GROUND) PLATFORM	7
SUBLABEL, J-SERIES	3	ACTIVITY	
MESSAGE LENGTH INDICATOR	3	VOICE FREQUENCY/CHANNEL	13
EXERCISE INDICATOR	1	CONTROL CHANNEL	7
SPARE	1	ACTIVE RELAY INDICATOR, VOICE	1
FORCE TELL INDICATOR	1	CHANNEL	
EMERGENCY INDICATOR	1	ACTIVE RELAY INDICATOR,	1
COMMAND AND CONTROL INDICATOR	1	CONTROL CHANNEL	
SIMULATION INDICATOR	1	VOICE FREQUENCY/CHANNEL	1
SPARE	2	INDICATOR	
ACTIVE RELAY INDICATOR, WIDE	1	SPARE	1
AREA NETWORK			
RTT REPLY STATUS INDICATOR	1		
NETWORK PARTICIPATION STATUS	4	<u>J2.6C3</u>	
INDICATOR		<u>DATA ELEMENT</u>	<u># BITS</u>
TIME QUALITY	4	WORD FORMAT	2
GEODETTIC POSITION QUALITY	4	CONTINUATION WORD LABEL	5
STRENGTH	4	SPARE	1
SPARE	1	U COORDINATE	20
ELEVATION, 25 FT	11	V COORDINATE	20
SPARE	2	BETA ANGLE	15
MISSION CORRELATOR	8	RELATIVE POSITION QUALITY	4
ELEVATION QUALITY	4	RELATIVE AZIMUTH QUALITY	3
SPARE	5		
		<u>J2.6C6</u>	
<u>J2.6E0</u>		<u>DATA ELEMENT</u>	<u># BITS</u>
<u>DATA ELEMENT</u>	<u># BITS</u>	WORD FORMAT	2
WORD FORMAT	2	CONTINUATION WORD LABEL	5
LATITUDE, 0.0013 MINUTE	23	TIME TAG, TIME OF VALIDITY	9
LONGITUDE, 0.0013 MINUTE	24	UNIVERSAL TRANSVERSE MERCATOR	5
SPARE	1	100,000 METER SQUARE ROW	
COURSE	9	UNIVERSAL TRANSVERSE MERCATOR	5
SPEED	11	100,000 METER SQUARE COLUMN	
		UNIVERSAL TRANSVERSE MERCATOR	5
<u>J2.6C1</u>		GRID ZONE ROW	
<u>DATA ELEMENT</u>	<u># BITS</u>	SPARE	1
WORD FORMAT	2	UNIVERSAL TRANSVERSE MERCATOR	14
CONTINUATION WORD LABEL	5	10-METER NORTHING	
VOICE CALL SIGN INDICATOR	1	SPARE	2
SPARE	1	UNIVERSAL TRANSVERSE MERCATOR	14
VOICE CALL SIGN	24	10-METER EASTING	
		SPARE	2

J2.6 MESSAGE SUMMARY (Continued)

DATA ELEMENT SUMMARY (Continued)

J2.6C6 (Continued)	
DATA ELEMENT	# BITS
UNIVERSAL TRANSVERSE MERCATOR	6
GRID ZONE COLUMN	

MIL-STD-6016B

J2.6 TRANSMIT/RECEIVE RULES

TITLE: Land (Ground) Track PPLI Message

TRANSMIT RULES

1. The J2.6B Land (Ground) Track PPLI basic message consists of the J2.6I Land (Ground) Track PPLI initial word and the J2.6E0 Land (Ground) Track PPLI extension word. The J2.6B basic message shall be transmitted periodically at RRN = 6 (12 seconds, 8-20 second interval) or, when specified, at the access rate in the time slot assignment by land (ground) JUs when their terminals are operating in the Normal Mode and the Network Participation Status Indicator field is set to one of the following:

- a. Active.
- b. No J0.0 Message Being Received.
- c. High Error Rate.
- d. Tactical Data System (TDS) Failure.

2. Applicable continuation words shall be transmitted in a J2.6I/J2.6E0/J2.6CX word sequence. Only one continuation word shall follow the extension word when only three words are allowed in any one time slot.

3. When the JU is assigned to transmit in the joint PPLI network PG or is neither an active voice relay or active control relay and assigned to transmit in the PPLI A or PPLI B network PG, it shall transmit in each assigned PG a J2.6I/J2.6E0/J2.6C3 word sequence in every second time slot in which a J2.6B message is scheduled for transmission. The intervening transmissions shall be a J2.6I/J2.6E0/J2.6CX word sequence with the sequence of J2.6CX words in the following order:

- a. J2.6C6 Land (Ground) Track PPLI - UTM/UPS Position continuation word.

J2.6 TRANSMIT/RECEIVE RULES (Continued)

TRANSMIT RULES (Continued)

b. J2.6C1 Land (Ground) Track PPLI - Amplification/Mission Information continuation word.

4. When the JU is either an active voice relay or active control relay and assigned to transmit in either the PPLI A or PPLI B network PG it shall transmit in both PGs a J2.6I/J2.6E0/J2.6C1 word sequence in every second time slot in which a J2.6B message is scheduled for transmission. The intervening transmissions shall be a J2.6I/J2.6E0/J2.6CX word sequence with the sequence of J2.6CX words in the following order:

a. J2.6C6 Land (Ground) Track PPLI - UTM/UPS Position continuation word.

b. J2.6C3 Land (Ground) Track PPLI - Relative Navigation continuation word.

5. When data within a J2.6C1, J2.6C2, J2.6C3, or J2.6C6 word change and only three words are allowed in a time slot, a J2.6I/J2.6E0/J2.6CX word sequence shall replace the next Land (Ground) Track PPLI message in the sequence except that a J2.6I/J2.6E0/J2.6C1 word sequence shall not be replaced if the JU is an active voice or active control relay. If more than three words can be transmitted in a time slot, a J2.6I/J2.6E0/J2.6CX/J2.6CX/J2.6CX/J2.6CX/etc., word sequence shall be transmitted according to transmit rules 3 and 4 above except that no continuation word shall be repeated in the same time slot.

If any of the continuation words having changed data cannot be transmitted in the next time slot because of the number of transmissions allowed in the time slot, transmission shall occur such that the J2.6C1 word has the first priority, the J2.6C3 word has the second priority, and the J2.6C6 word has the third priority.

6. If no data is available for a continuation word then that continuation word shall be deleted from the sequence and the next continuation word in the

J2.6 TRANSMIT/RECEIVE RULES (Continued)

TRANSMIT RULES (Continued)

sequence transmitted. If no data exists for all continuation words, the J2.6B message shall be transmitted.

7. A J2.6I/J2.6E0/J2.6C3 word sequence shall be transmitted with the Network Participation Status Indicator field set to the appropriate condition prior to the terminal taking the action described (Radio Silence, Polling, Inactive) or in the next transmission opportunity after the condition occurs (High Error Rate, No J0.0 Message Being Received, TDS Failure).

8. A J2.6B basic message shall be transmitted in response to a J0.6 Communications Control message in the time slot provided. If the terminal is in the Polling Mode, the RTT Reply Status Indicator field shall be set to not operational.

RECEIVE RULES

All received nonsimulated (Simulation Indicator = 0) and nonrelayed (Relayed Transmission Indicator = 0) J2.6 messages shall be processed in accordance with the requirements for terminal synchronization and relative navigation.

.....

WORD TITLE: LAND (GROUND) TRACK PPLI INITIAL WORD

49	48	47	46	45	44	43	42	41	40:	39:	38	37	36	35:	34	33	32	31:	30	29	28	27:	26	25
ELEVATION, 25 FT									:	:	STRENGTH			:	GEODETIC POSITION QUALITY		:	TIME QUALITY			:	NPS IND		
11									:	1	:	4			:	4		:	4			:	4	

:	69	68	67	66	65:	64	63	62	61:	60	59	58	57	56	55	54	53:	52	51:	50	
:						:	ELEVATION		:	MISSION CORRELATOR								:	SP		:
:	SPARE					:	QUALITY		:									:			:
:						:			:									:			:
:						:			:									:			:
:	5					:	4		:	8								:	2		:

WORD DESCRIPTION

WORD NUMBER: J2.6I

WORD TITLE: LAND (GROUND) TRACK PPLI INITIAL WORD

REFERENCE DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	00
270 004	LABEL, J-SERIES	2-	6 5	00010
271 005	SUBLABEL, J-SERIES	7-	9 3	110
800 001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
385 003	EXERCISE INDICATOR (EX IND)	13	1	
756 001	SPARE (SP)	14	1	
354 002	FORCE TELL INDICATOR (FT IND)	15	1	
355 002	EMERGENCY INDICATOR (EMG IND)	16	1	
893 001	COMMAND AND CONTROL INDICATOR (C2 IND)	17	1	
1604 001	SIMULATION INDICATOR (SIM IND)	18	1	
756 002	SPARE (SP)	19-	20 2	
1571 002	ACTIVE RELAY INDICATOR, WIDE AREA NETWORK (ARI WAN)	21	1	
274 001	RTT REPLY STATUS INDICATOR (RRS)	22	1	
1613 001	NETWORK PARTICIPATION STATUS INDICATOR (NPS IND)	23-	26 4	
279 001	TIME QUALITY	27-	30 4	
283 001	GEODETIC POSITION QUALITY	31-	34 4	
386 013	STRENGTH	35-	38 4	
756 001	SPARE (SP)	39	1	
1612 001	ELEVATION, 25 FT	40-	50 11	
756 002	SPARE (SP)	51-	52 2	
725 003	MISSION CORRELATOR	53-	60 8	
283 003	ELEVATION QUALITY	61-	64 4	
756 005	SPARE	65-	69 5	

FIELD CODING FOR J2.6I

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
385	003	EXERCISE INDICATOR ----- NON-EXERCISE TRACK EXERCISE TRACK OR UNIT	0 1	INDICATES WHETHER OR NOT THE MESSAGE IDENTIFIES AN EXERCISE TRACK.
354	002	FORCE TELL INDICATOR ----- NO STATEMENT FORCE TELL STATUS	0 1	THIS INDICATOR CAUSES TRACK/POINT DATA TO BE FORCED THROUGH CONTROLLABLE RECEIVE FILTERS.
355	002	EMERGENCY INDICATOR ----- NO STATEMENT EMERGENCY STATUS	0 1	USED TO INDICATE WHETHER OR NOT A UNIT OR TRACK HAS AN EMERGENCY.
893	001	COMMAND AND CONTROL INDICATOR ----- NONC2 UNIT C2 UNIT	0 1	THIS INDICATOR ALLOWS A JU TO IDENTIFY ITSELF AS A NONC2 OR C2 UNIT. THE UNIT BEING REPORTED IS A NONC2 UNIT. THE UNIT BEING REPORTED IS A C2 UNIT.
1604	001	SIMULATION INDICATOR ----- REAL TRACK OR UNIT SIMULATED TRACK OR UNIT	0 1	INDICATES WHETHER THE TRACK REFER- ENCED IN THE MESSAGE IS A REAL OR A SIMULATED TRACK.
1571	002	ACTIVE RELAY INDICATOR, WIDE AREA NETWORK ----- RELAYING FUNCTION INACTIVE RELAYING FUNCTION ACTIVE	0 1	INDICATES THE STATUS OF A UNIT'S RE- LAYING CAPABILITY OVER THE WIDE- AREA NETWORK.
274	001	RTT REPLY STATUS INDICATOR ----- RTT REPLY FUNCTION NORMAL RTT REPLY FUNCTION NOT OPERATIONAL	0 1	CONVEYS THE STATUS OF A TERMINAL'S RTT REPLY FUNCTION.

FIELD CODING FOR J2.6I

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1613	001	NETWORK PARTICIPATION STATUS INDICATOR		INDICATES TO WHAT DEGREE A UNIT IS PARTICIPATING ON THE INTERFACE.

		NO STATEMENT	0	
		ACTIVE-NON SPECIFIC	1	
		INACTIVE-NON SPECIFIC	2	
		CONDITIONAL RADIO	3	
		SILENCE		
		HIGH ERROR RATE	4	
		NO J0.0 MESSAGE BEING RECEIVED	5	
		TACTICAL DATA SYSTEM FAILURE	6	
		POLLING	7	
		UNDEFINED	8 THROUGH 15	
279	001	TIME QUALITY		THE QUALITY IS STATED AS A NUMERICAL VALUE FROM 0 TO 15 WHERE THE HIGHER VALUES INDICATE THE HIGHER QUALITIES. QUALITY 0 IS NOT TO BE USED FOR SYNCHRONIZATION OR THE RELATIVE NAVIGATION FUNCTION.

		> 18080 NANOSECONDS	0	
		< OR = 18080 NANOSECONDS	1	
		< OR = 9040 NANOSECONDS	2	
		< OR = 4520 NANOSECONDS	3	
		< OR = 2260 NANOSECONDS	4	
		< OR = 1600 NANOSECONDS	5	
		< OR = 1130 NANOSECONDS	6	
		< OR = 800 NANOSECONDS	7	
		< OR = 565 NANOSECONDS	8	
		< OR = 400 NANOSECONDS	9	
		< OR = 282 NANOSECONDS	10	
		< OR = 200 NANOSECONDS	11	
		< OR = 141 NANOSECONDS	12	
		< OR = 100 NANOSECONDS	13	
		< OR = 71 NANOSECONDS	14	
		NET TIME REFERENCE	15	
283	001	GEODETIC POSITION QUALITY		THE LEVEL OF GEODETIC POSITION UNCERTAINTY AS ESTIMATED BY THE TERMINAL NAVIGATION FUNCTION.

		>18080 FT	0	
		< OR = TO 18080 FT	1	
		< OR = TO 9040 FT	2	

FIELD CODING FOR J2.6I

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
283	001	GEODETIC POSITION QUALITY -----	(CONTINUED)	
		< OR = TO 4520 FT	3	
		< OR = TO 2260 FT	4	
		< OR = TO 1600 FT	5	
		< OR = TO 1130 FT	6	
		< OR = TO 800 FT	7	
		< OR = TO 565 FT	8	
		< OR = TO 400 FT	9	
		< OR = TO 282 FT	10	
		< OR = TO 200 FT	11	
		< OR = TO 141 FT	12	
		< OR = TO 100 FT	13	
		< OR = TO 71 FT	14	
		< OR = TO 50 FT	15	
386	013	STRENGTH -----		EXPRESSES THE NUMBER OF ENTITIES REPRESENTED BY A SINGLE TRACK.
		NO STATEMENT	0	
		1 UNIT	1	
		2 UNITS	2	
		3 UNITS	3	
		4 UNITS	4	
		5 UNITS	5	
		6 UNITS	6	
		7 UNITS	7	
		8 UNITS	8	
		9 UNITS	9	
		10 UNITS	10	
		11 UNITS	11	
		12 UNITS	12	
		2 THROUGH 7 (FEW) UNITS	13	
		GREATER THAN 7 (MANY) UNITS	14	
		GREATER THAN 12 UNITS	15	
1612	001	ELEVATION, 25 FT -----		THE ELEVATION IN FEET OF AN OBJECT OR POINT AS MEASURED OUTWARD FROM THE EARTH AS A POSITIVE QUANTITY ABOVE MEAN SEA LEVEL (MSL). IN 25 FOOT INCREMENTS.
		0 THROUGH 51,150 FEET	0 THROUGH 2046	
		ELEVATION UNKNOWN	2047	
725	003	MISSION CORRELATOR -----		SPECIFIES THE IDENTIFYING NUMBER ASSIGNED TO AN OVERALL MISSION.

			FIELD CODING FOR J2.6I	(SHEET 4)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
725	003	MISSION CORRELATOR -----	(CONTINUED)	
		NO STATEMENT NUMERIC	0 1 THROUGH 255	THIS ENABLES PARTICIPANTS WITH DIFFERENT OBJECTIVES ON SPECIFIC MISSIONS TO BE ASSOCIATED WITH THE SAME OVERALL MISSION.
283	003	ELEVATION QUALITY -----		THE LEVEL OF HEIGHT UNCERTAINTY AS ESTIMATED BY THE TERMINAL NAVIGATION FUNCTION.
		>18080 FT	0	
		< OR = TO 18080 FT	1	
		< OR = TO 9040 FT	2	
		< OR = TO 4520 FT	3	
		< OR = TO 2260 FT	4	
		< OR = TO 1600 FT	5	
		< OR = TO 1130 FT	6	
		< OR = TO 800 FT	7	
		< OR = TO 565 FT	8	
		< OR = TO 400 FT	9	
		< OR = TO 282 FT	10	
		< OR = TO 200 FT	11	
		< OR = TO 141 FT	12	
		< OR = TO 100 FT	13	
		< OR = TO 71 FT	14	
		< OR = TO 50 FT	15	

.....

WORD TITLE: LAND (GROUND) TRACK PPLI EXTENSION WORD

: 49:	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25:
: SP :	LONGITUDE, 0.0013 MINUTE																				:			
: 1 :	24																				:			

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50	:		
:												:											:
:	SPEED											:	COURSE										:
:												:											:
:	11											:	9										:

WORD DESCRIPTION

WORD NUMBER: J2.6E0

WORD TITLE: LAND (GROUND) TRACK PPLI EXTENSION WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	10
281 015	LATITUDE, 0.0013 MINUTE	2-	24 23	
282 015	LONGITUDE, 0.0013 MINUTE	25-	48 24	
756 001	SPARE (SP)	49	1	
371 015	COURSE	50-	58 9	
367 018	SPEED	59-	69 11	

FIELD CODING FOR J2.6E0

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
281	015	LATITUDE, 0.0013 MINUTE ----- 0 DEGREES +90/4,194,303 THROUGH +90 DEGREES NORTH NO STATEMENT -90 THROUGH -90/4,194,303 DEGREES SOUTH	0 1 THROUGH 4194303 4194304 4194305 THROUGH 8388607	THE PRECISION IS APPROXIMATELY 8 FEET. IN 90/4,194,303 DEGREE INCREMENTS.
282	015	LONGITUDE, 0.0013 MINUTE ----- 0 DEGREES +180/8,388,607 THROUGH +180 DEGREES EAST NO STATEMENT -180 THROUGH -180/8,388,607 DEGREES WEST	0 1 THROUGH 8388607 8388608 8388609 THROUGH 16777215	THE PRECISION IS APPROXIMATELY 8 FEET. IN 180/8,388,607 DEGREE INCREMENTS.
371	015	COURSE ----- 0 THROUGH 359 DEGREES ILLEGAL NO STATEMENT	0 THROUGH 359 360 THROUGH 510 511	INDICATES THE DIRECTION OF TRAVEL OF AN OBJECT IN DEGREES WITH RESPECT TO TRUE NORTH. IN 1 DEGREE INCREMENTS.
367	018	SPEED ----- 0 THROUGH 4092 DATA MILES PER HOUR NO STATEMENT	0 THROUGH 2046 2047	THE RATE OF CHANGE OF POSITION. EXPRESSES GROUND SPEED IN 2 DATA MILES PER HOUR INCREMENTS.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J2.6C1

WORD TITLE: LAND (GROUND) TRACK PPLI - AMPLIFICATION/MISSION INFORMATION
CONTINUATION WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00	:																	
VOICE CALL SIGN															:	:	VCS:	CONTINUATION WORD	:	WORD	:																					
															:	SP	:	IND:	:	LABEL	:	FORMAT	:																			
															:	:	:	:	:	:	:	:	:	:	:																	
24															:	1	:	1	:	:	5	:	2	:	:																	
49	48	47	46	:	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25																	
<---			:	LAND (GROUND) PLATFORM							:	LAND (GROUND) PLATFORM							:	---																						
			:	ACTIVITY							:								:																							
			:								:								:																							
			:	7							:	6							:																							
			:	69	:	68	:	67	:	66	:	65	:	64	:	63	:	62	:	61	:	60	:	59	:	58	:	57	:	56	:	55	:	54	:	53	:	52	:	51	:	50
			:	:	:	VFC:	:	ARI:	:	ARI:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
			:	SP	:	IND:	:	CC	:	VC	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:			
			:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:			
			:	1	:	1	:	1	:	1	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:				
			:	7															:	13																						

WORD DESCRIPTION

WORD NUMBER: J2.6C1

WORD TITLE: LAND (GROUND) TRACK PPLI - AMPLIFICATION/MISSION INFORMATION
CONTINUATION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	01
1551	001	CONTINUATION WORD LABEL	2-	6 5	00001
1717	001	VOICE CALL SIGN INDICATOR (VCS IND)	7	1	
756	001	SPARE (SP)	8	1	
264	001	VOICE CALL SIGN	9-	32 24	
1797	004	LAND (GROUND) PLATFORM	33-	38 6	
1798	004	LAND (GROUND) PLATFORM ACTIVITY	39-	45 7	
417	016	VOICE FREQUENCY/CHANNEL	46-	58 13	
348	006	CONTROL CHANNEL	59-	65 7	
1571	003	ACTIVE RELAY INDICATOR, VOICE CHANNEL (ARI VC)	66	1	
1571	004	ACTIVE RELAY INDICATOR, CONTROL CHANNEL (ARI CC)	67	1	
898	001	VOICE FREQUENCY/CHANNEL INDICATOR (VFC IND)	68	1	
756	001	SPARE (SP)	69	1	

FIELD CODING FOR J2.6C1 (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1717	001	VOICE CALL SIGN INDICATOR -----		USED TO INDICATE WHETHER OR NOT THE VOICE CALL SIGN FIELD SHOULD BE INTERPRETED.
		DO NOT INTERPRET VOICE CALL SIGN	0	
		INTERPRET VOICE CALL SIGN	1	
264	001	VOICE CALL SIGN -----		AN ALPHANUMERICALLY-CODED CALL SIGN USED IN VOICE COMMUNICATIONS TO IDENTIFY A FORCE ELEMENT. THE 24 BITS ARE DIVIDED INTO FOUR GROUPS OF 6 BITS. EACH GROUP IS INTERPRETED INDEPENDENTLY IN ACCORDANCE WITH THE FOLLOWING CODE:
		BLANK	0	
		1	1	
		2	2	
		3	3	
		4	4	
		5	5	
		6	6	
		7	7	
		8	8	
		9	9	
		A	10	
		B	11	
		C	12	
		D	13	
		E	14	
		F	15	
		G	16	
		H	17	
		I	18	
		J	19	
		K	20	
		L	21	
		M	22	
		N	23	
		O	24	
		P	25	
		Q	26	
		R	27	
		S	28	

FIELD CODING FOR J2.6C1

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

264	001	VOICE CALL SIGN -----	(CONTINUED)	
		T	29	
		U	30	
		V	31	
		W	32	
		X	33	
		Y	34	
		Z	35	
		UNDEFINED	36 THROUGH 62	
		0 (ZERO)	63	

1797	004	LAND (GROUND) PLATFORM -----		
------	-----	---------------------------------	--	--

THE LAND (GROUND) PLATFORM FIELD
ALONG WITH THE LAND (GROUND)
PLATFORM ACTIVITY FIELD FURTHER
DEFINES THE IDENTITY OF A
LAND(GROUND) POINT OR TRACK.

NO STATEMENT	0
TROOP CONCENTRATION/UNIT	1
HEADQUARTER COMPLEX	2
COMMAND/CONTROL/COMMAND AND CONTROL CENTER	3
ASSEMBLY AREA	4
INSTALLATION/FACILITY, MILITARY	5
INSTALLATION/FACILITY, CIVILIAN	6
AIRFIELD/AIRBASE	7
PORT/HARBOR FACILITY	8
STORAGE SITE	9
TACTICAL POSITION	10
FORTIFICATION	11
INTERSECTION	12
CONVOY	13
COMBAT VEHICLE	14
COMBAT SUPPORT VEHICLE	15
VEHICLE, OTHER	16
TANK	17
TRAIN	18
REMOTELY PILOTED VEHICLE	19
MORTAR	20
FIELD ARTILLERY	21
AIR DEFENSE ARTILLERY	22
ROCKET LAUNCHER	23
MISSILE LAUNCHER	24

FIELD CODING FOR J2.6C1

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1797	004	LAND (GROUND) PLATFORM	(CONTINUED)	

		SPECIAL WEAPON	25	
		BRIDGE	26	
		BUILDING/STRUCTURE	27	
		POWER FACILITY	28	
		RAIL FACILITY	29	
		TERRAIN	30	
		NAVAID SITE	31	
		COMMUNICATION SITE	32	
		RADAR SITE	33	
		ANTENNA/EMITTER	34	
		BUFFER CENTER	35	
		ELECTRONIC WARFARE SITE	36	
		SURVEILLANCE SITE	37	
		BRIDGING EQUIPMENT	38	
		MINE WARFARE EQUIPMENT	39	
		SURFACE-TO-AIR MISSILE	40	
		(SAM) SITE		
		MARITIME HEADQUARTERS	41	
		AIR SUPPORT RADAR TEAM	42	
		(ASRT)		
		DIRECT AIR SUPPORT	43	
		CENTER (DASC)		
		FORWARD AIR CONTROL	44	
		PARTY (FACP)		
		BATTALION OPERATIONS	45	
		CENTER (BOC)		
		TACTICAL DATA SYSTEM	46	
		(TDS)		
		DECOY	47	
		TRACKED VEHICLE	48	
		THEATER HIGH ALTITUDE	49	
		AREA DEFENSE (THAAD)		
		JOINT TACTICAL GROUND	50	
		STATION (JTAGS)		
		ARMOR	51	
		CAVALRY	52	
		ENGINEER	53	
		AIRBORNE/SPECIAL	54	
		OPERATIONS		
		AVIATION	55	
		AIR DEFENSE SITE	56	
		BALLISTIC MISSILE	57	
		DEFENSE SITE		

FIELD CODING FOR J2.6C1

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1797	004	LAND (GROUND) PLATFORM -----	(CONTINUED)	
		UNDEFINED RESET TO NO STATEMENT	58 THROUGH 62 63	
1798	004	LAND (GROUND) PLATFORM ACTIVITY -----		THE LAND (GROUND) PLATFORM ACTIVITY FIELD ALONG WITH THE LAND (GROUND) PLATFORM FIELD FURTHER DEFINES THE IDENTITY OF A LAND (GROUND) POINT OR TRACK.
		NO STATEMENT	0	
		HOLDING	1	
		DELAYING	2	
		MOVING	3	
		DETECTING	4	
		ACQUIRING	5	
		ENGAGING	6	
		ADVANCING	7	
		ANTIAIR ATTACK	8	
		AMPHIBIOUS ASSAULT	9	
		FIRING/LAUNCHING	10	
		CONVENTIONAL ATTACK/ ASSAULT	11	
		SPECIAL WEAPONS ATTACK	12	
		DEMOLITION	13	
		OVER THE HORIZON TARGETING	14	
		TRANSITING	15	
		RETURN TO BASE	16	
		DEPLOYING	17	
		EMISSION CONTROL (EMCON)	18	
		RIVER CROSSING	19	
		LOADING	20	
		TOWING	21	
		BUILDING FORTIFICATION/ BARRIER	22	
		CLEARING BARRIER	23	
		RECOVERING EQUIPMENT	24	
		MINE SWEEPING	25	
		MINE LAYING	26	
		JAMMING	27	
		RECONNAISSANCE/ PATROLLING	28	
		SEARCH AND RESCUE (SAR)	29	
		TRAINING	30	

FIELD CODING FOR J2.6C1

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1798	004	LAND (GROUND) PLATFORM ACTIVITY -----	(CONTINUED)	
		MEDICAL EVACUATION (MEDEVAC)	31	
		ESCORTING	32	
		TRANSPORTING	33	
		SCREENING	34	
		SUPPORTING	35	
		REPAIRING	36	
		REFUELING	37	
		NEUTRALIZING	38	
		TARGETING	39	
		BYPASSING	40	
		CLOSING	41	
		CONCENTRATING	42	
		DEFENDING	43	
		DISENGAGING	44	
		INFILTRATING	45	
		INTERDICTING	46	
		LANDING	47	
		OCCUPYING	48	
		DISPERSING	49	
		SUPPLY/RESUPPLY	50	
		RETROGRADE/WITHDRAWING	51	
		TRANSMITTING	52	
		ELECTRONIC WARFARE	53	
		SUPPORT (ES)		
		ELECTRONIC ATTACK (EA)	54	
		MOVING EQUIPMENT	55	
		POWER UP AND MANNED, NOT EMITTING	56	
		PREPARATION FOR LAUNCH	57	
		SITE SHUT DOWN TO UNPOWERED STATUS	58	
		UNDEFINED	59 THROUGH 114	
		LAND (GROUND) ACTIVITY 1 THROUGH 12	115 THROUGH 126	A SPECIFIC LAND (GROUND) MISSION DEFINED BY THE JOINT OPERATIONAL COMMANDER.
		RESET TO NO STATEMENT	127	
417	016	VOICE FREQUENCY/CHANNEL -----		IDENTIFIES A UHF VOICE RADIO CHANNEL NUMBER TO ACCOUNT FOR 7000 POSSIBLE RADIO FREQUENCIES IN THE 225 TO 400 MHZ BAND OR THE OPTION

5.1-478

MIL-STD-6016B

FIELD CODING FOR J2.6C1

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
417	016	VOICE FREQUENCY/CHANNEL -----	(CONTINUED)	
		NO STATEMENT UHF FREQUENCY	0 1 THROUGH 7000	OF SELECTING CHANNEL GROUP A OR CHANNEL GROUP B. THE BIT CODE IS RELATED TO THE UHF FREQUENCY BY USING THE FOLLOWING FORMULA: FREQ(MHZ) = 225 + .025(N-1) WHERE N = BIT CODE NUMBER.
		ILLEGAL CHANNEL GROUP A CHANNEL GROUP B ILLEGAL	7001 THROUGH 7039 7040 THROUGH 7167 7168 THROUGH 7295 7296 THROUGH 8191	128 CHANNELS FROM 0-127. 128 CHANNELS FROM 0-127.
348	006	CONTROL CHANNEL -----		
		CONTROL CHANNEL NUMBER NO STATEMENT	0 THROUGH 126 127	
1571	003	ACTIVE RELAY INDICATOR, VOICE CHANNEL -----		INDICATES THE STATUS OF A UNIT'S RE- LAYING CAPABILITY OVER A VOICE CHANNEL.
		RELAYING FUNCTION INACTIVE RELAYING FUNCTION ACTIVE	0 1	
1571	004	ACTIVE RELAY INDICATOR, CONTROL CHANNEL -----		INDICATES THE STATUS OF A UNIT'S RE- LAYING CAPABILITY OVER A CONTROL CHANNEL.
		RELAYING FUNCTION INACTIVE RELAYING FUNCTION ACTIVE	0 1	
898	001	VOICE FREQUENCY/CHANNEL INDICATOR -----		INDICATES WHETHER THE VOICE FREQUENCY/CHANNEL IN THE MESSAGE IS THE PRIMARY OR THE ALTERNATE VOICE FREQUENCY/CHANNEL. THE VOICE FREQUENCY/CHANNEL IS THE PRIMARY VOICE FREQUENCY/CHANNEL. THE VOICE FREQUENCY/CHANNEL IS THE ALTERNATE VOICE FREQUENCY/CHANNEL.
		PRIMARY VOICE FREQUENCY/ CHANNEL ALTERNATE VOICE FREQUENCY/CHANNEL	0 1	

WORD MAP

WORD NUMBER: J2.6C3

WORD TITLE: LAND (GROUND) TRACK PPLI - RELATIVE NAVIGATION CONTINUATION
WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00	:					
U COORDINATE																	:	:	CONTINUATION WORD				:	WORD	:					
																	:	SP	:	LABEL				:	FORMAT	:				
																	:	:	:					:	:	:				
20																	:	1	:	5				:	2	:				
49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25	:					
<---	:	V COORDINATE																				:						:	---	
</																														

WORD DESCRIPTION

WORD NUMBER: J2.6C3

WORD TITLE: LAND (GROUND) TRACK PPLI - RELATIVE NAVIGATION CONTINUATION
WORD

REFERENCE		BIT #		RESOLUTION, CODING, ETC
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	00011
756 001	SPARE (SP)	7	1	
276 001	U COORDINATE	8-	27 20	
277 001	V COORDINATE	28-	47 20	
284 001	BETA ANGLE	48-	62 15	
278 001	RELATIVE POSITION QUALITY	63-	66 4	
285 001	RELATIVE AZIMUTH QUALITY	67-	69 3	

FIELD CODING FOR J2.6C3

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
276	001	U COORDINATE -----		THE EAST WEST COMPONENT OF POSITION MEASURED IN A U, V CARTESIAN COOR- DINATE SYSTEM WHERE THE U,V PLANE IS TANGENT TO THE EARTH AT ITS ORIGIN. POSITIONS EAST OF THE ORIGIN ARE POSITIVE. POSITIONS WEST OF THE ORIGIN ARE NEGATIVE. IN 1/512 DATA MILE INCREMENTS.
		0 DATA MILES	0	
		+1/512 THROUGH	1 THROUGH 524287	
		+1023 511/512 DATA MILES		
		NO STATEMENT	524288	
		-1023 511/512 THROUGH	524289 THROUGH 1048575	
		-1/512 DATA MILES		
277	001	V COORDINATE -----		THE NORTH SOUTH COMPONENT OF POSI- TION MEASURED IN A U,V CARTESIAN COORDINATE SYSTEM WHERE THE U,V PLANE IS TANGENT TO THE EARTH AT ITS ORIGIN. POSITIONS NORTH OF THE ORIGIN ARE POSITIVE. POSI- TIONS SOUTH OF THE ORIGIN ARE NEGATIVE. IN 1/512 DATA MILE INCREMENTS.
		0 DATA MILES	0	
		+1/512 THROUGH	1 THROUGH 524287	
		+1023 511/512 DATA MILES		
		NO STATEMENT	524288	
		-1023 511/512 THROUGH	524289 THROUGH 1048575	
		-1/512 DATA MILES		
284	001	BETA ANGLE -----		THE ORIENTATION OF THE U,V TANGENT PLANE WITH RESPECT TO TRUE NORTH, I.E., THE ANGLE FORMED BY THE V-AXIS AND TRUE NORTH. COUNTER- CLOCKWISE DISPLACEMENT OF THE V-AXIS IS STATED AS A POSITIVE ANGLE, CLOCKWISE AS A NEGATIVE ANGLE. IN 0.0125 MILLIRADIAN INCREMENTS.
		0 MILLIRADIANS	0	
		+0.0125 THROUGH +204.8 MILLIRADIANS	1 THROUGH 16383	

5.1-482

MIL-STD-6016B

284	001	BETA ANGLE	(CONTINUED)

		NO STATEMENT	16384
		-204.8 THROUGH -0.0125	16385 THROUGH 32767
		MILLIRADIANS	

INDICATES THE LEVEL OF RELATIVE POSITION UNCERTAINTY IN THE U,V TANGENT PLANE AS ESTIMATED BY THE TERMINAL RELATIVE NAVIGATION FUNCTION. THE QUALITY IS STATED AS A NUMERICAL VALUE FROM 0 TO 15 WHERE THE HIGHER VALUES INDICATE THE HIGHER LEVELS OF QUALITY.

>18080 FEET	0
< OR = 18080 FEET	1
< OR = 9040 FEET	2
< OR = 4520 FEET	3
< OR = 2260 FEET	4
< OR = 1600 FEET	5
< OR = 1130 FEET	6
< OR = 800 FEET	7
< OR = 565 FEET	8
< OR = 400 FEET	9
< OR = 282 FEET	10
< OR = 200 FEET	11
< OR = 141 FEET	12
< OR = 100 FEET	13
< OR = 71 FEET	14
NAVIGATION CONTROLLER	15

REFERENCE SOURCE FOR NAVIGATION.

THE QUALITY IS STATED AS A NUMERICAL
VALUE FROM 0 TO 7 WHERE THE HIGHER
VALUES INDICATE THE HIGHER LEVELS
OF QUALITY.

>64 MILLIRADIANS	0
< OR = 64 MILLIRADIANS	1
< OR = 32 MILLIRADIANS	2
< OR = 16 MILLIRADIANS	3
< OR = 8 MILLIRADIANS	4
< OR = 4 MILLIRADIANS	5
< OR = 2 MILLIRADIANS	6
< OR = 1 MILLIRADIAN	7

WORD MAP

WORD NUMBER: J2.6C6

WORD TITLE: LAND (GROUND) TRACK PPLI - UTM/UPS POSITION CONTINUATION
WORD

24	23	22	21:	20	19	18	17	16:	15	14	13	12	11	10	09	08	07:	06	05	04	03	02:	01	00:	
UTM MSC			:	UTM MSR			:	TIME TAG, TIME OF VALIDITY									:	CONTINUATION WORD				:	WORD	:	
			:				:										:	LABEL				:	FORMAT	:	
5			:	5			:	9									:	5				:	2	:	
49	48:	47	46:	45	44	43	42	41	40	39	38	37	36	35	34	33	32:	31:	30	29	28	27	26:	25	
<---		:	SP	:	UNIVERSAL TRANSVERSE MERCATOR 10-METER NORTHING												:	SP	:	UTM GZR				:	---
		:		:													:		:					:	
		:	2	:	14												:	1	:	5				:	

WORD DESCRIPTION

WORD NUMBER: J2.6C6

WORD TITLE: LAND (GROUND) TRACK PPLI - UTM/UPS POSITION CONTINUATION
WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	01
1551	001	CONTINUATION WORD LABEL	2-	6 5	00110
826	001	TIME TAG, TIME OF VALIDITY (TTG TOV)	7-	15 9	
816	001	UNIVERSAL TRANSVERSE MERCATOR 100,000 METER SQUARE ROW (UTM MSR)	16-	20 5	
821	001	UNIVERSAL TRANSVERSE MERCATOR 100,000 METER SQUARE COLUMN (UTM MSC)	21-	25 5	
825	001	UNIVERSAL TRANSVERSE MERCATOR GRID ZONE ROW (UTM GZR)	26-	30 5	
756	001	SPARE (SP)	31	1	
820	001	UNIVERSAL TRANSVERSE MERCATOR 10-METER NORTHING	32-	45 14	
756	002	SPARE (SP)	46-	47 2	
819	001	UNIVERSAL TRANSVERSE MERCATOR 10-METER EASTING	48-	61 14	
756	002	SPARE (SP)	62-	63 2	
818	001	UNIVERSAL TRANSVERSE MERCATOR GRID ZONE COLUMN (UTM GZC)	64-	69 6	

FIELD CODING FOR J2.6C6

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
826	001	TIME TAG, TIME OF VALIDITY -----		IDENTIFIES THE GROUP OF 24 (8 TIME SLOTS * 3 SETS) CONSECUTIVE TIME SLOT SETS DURING WHICH THE UTM/UPS POSITION IS VALID. EACH VALUE DEFINES A TIME SPAN OF 24 * 0.0078125 SECONDS = 0.1875 SECONDS. THE VALUE CORRESPONDS TO BITS 5 THROUGH 13 OF THE TIME SLOT NUMBER THUS DESIGNATING A GROUP OF 24 CONSECUTIVE TIME SLOT NUMBERS IDENTIFIED BY BITS 2 THROUGH 4 (8 TIME SLOTS) AND BITS 0 THROUGH 1 (3 SETS; A, B, AND C) OF THE TIME SLOT NUMBER. EACH VALUE CAN DEFINE EIGHT PERIODS DURING AN EPOCH DEPENDING ON THE VALUE OF BITS 14 THROUGH 16 OF THE TIME SLOT NUMBER.
		NUMERIC	0 THROUGH 511	
816	001	UNIVERSAL TRANSVERSE MERCATOR 100,000 METER SQUARE ROW -----		THE NORTH-SOUTH DESIGNATION FOR A 100,000 METER GRID OF A SPECIFIED UNIVERSAL TRANSVERSE MERCATOR (UTM) GRID ZONE ROW.
		NO STATEMENT	0	
		A	1	
		B	2	
		C	3	
		D	4	
		E	5	
		F	6	
		G	7	
		H	8	
		ILLEGAL	9	BIT CODE 9 IS ILLEGAL BECAUSE THE GRID DOES NOT USE THE LETTER I.
		J	10	
		K	11	
		L	12	
		M	13	
		N	14	
		ILLEGAL	15	BIT CODE 15 IS ILLEGAL BECAUSE THE GRID DOES NOT USE THE LETTER O.
		P	16	
		Q	17	
		R	18	

FIELD CODING FOR J2.6C6

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
816	001	UNIVERSAL TRANSVERSE MERCATOR 100,000 METER SQUARE ROW -----	(CONTINUED)	
		S	19	
		T	20	
		U	21	
		V	22	
		W	23	
		X	24	
		Y	25	
		Z	26	
		ILLEGAL	27 THROUGH 31	
821	001	UNIVERSAL TRANSVERSE MERCATOR 100,000 METER SQUARE COLUMN -----		THE EAST-WEST DESIGNATION FOR A 100,000-METER GRID OF A SPECIFIED UNIVERSAL TRANSVERSE MERCATOR (UTM) GRID ZONE COLUMN.
		NO STATEMENT	0	
		A	1	
		B	2	
		C	3	
		D	4	
		E	5	
		F	6	
		G	7	
		H	8	
		ILLEGAL	9	BIT CODE 9 IS ILLEGAL BECAUSE THE GRID DOES NOT USE THE LETTER I.
		J	10	
		K	11	
		L	12	
		M	13	
		N	14	
		ILLEGAL	15	BIT CODE 15 IS ILLEGAL BECAUSE THE GRID DOES NOT USE THE LETTER O.
		P	16	
		Q	17	
		R	18	
		S	19	
		T	20	
		U	21	
		V	22	
		W	23	
		X	24	
		Y	25	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
821	001	UNIVERSAL TRANSVERSE MERCATOR 100,000 METER SQUARE COLUMN ----- Z ILLEGAL	(CONTINUED) 26 27 THROUGH 31	
825	001	UNIVERSAL TRANSVERSE MERCATOR GRID ZONE ROW -----		IN THE UNIVERSAL TRANSVERSE MERCATOR (UTM) SYSTEM, AN AREA ON THE EARTH'S SURFACE FROM 80 DEGREES SOUTH LATITUDE AND 84 DEGREES NORTH LATITUDE MEASURING 8 DEGREES NORTH-SOUTH WHICH EXTENDS EAST- WEST FOR 360 DEGREES ORIGINATING AT THE 180-DEGREE MERIDIAN (EXCEPT THE ROW OR BAND FROM 72 TO 84 DEGREES NORTH, WHICH COVERS 12 DEGREES NORTH-SOUTH).
		NO STATEMENT	0	
		A	1	
		B	2	
		C	3	
		D	4	
		E	5	
		F	6	
		G	7	
		H	8	
		ILLEGAL	9	BIT CODE 9 IS ILLEGAL BECAUSE THE GRID DOES NOT USE THE LETTER I.
		J	10	
		K	11	
		L	12	
		M	13	
		N	14	
		ILLEGAL	15	BIT CODE 15 IS ILLEGAL BECAUSE THE GRID DOES NOT USE THE LETTER O.
		P	16	
		Q	17	
		R	18	
		S	19	
		T	20	
		U	21	
		V	22	
		W	23	
		X	24	
		Y	25	

FIELD CODING FOR J2.6C6

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
825	001	UNIVERSAL TRANSVERSE MERCATOR GRID ZONE ROW ----- Z ILLEGAL	(CONTINUED) 26 27 THROUGH 31	
820	001	UNIVERSAL TRANSVERSE MERCATOR 10-METER NORTHING ----- 0 THROUGH 99,990 METERS ILLEGAL	0 THROUGH 9999 10000 THROUGH 16383	THE NUMERICAL PART OF THE UNIVERSAL TRANSVERSE MERCATOR (UTM) GRID REFERENCE WHICH INDICATES THE NORTHING COORDINATE TO THE CLOSEST 10 METERS. IN 10 METER INCREMENTS.
819	001	UNIVERSAL TRANSVERSE MERCATOR 10-METER EASTING ----- 0 THROUGH 99,990 METERS ILLEGAL	0 THROUGH 9999 10000 THROUGH 16383	THE NUMERICAL PART OF THE UNIVERSAL TRANSVERSE MERCATOR (UTM) GRID REFERENCE WHICH INDICATES THE EASTING COORDINATE TO THE CLOSEST 10 METERS. IN 10 METER INCREMENTS.
818	001	UNIVERSAL TRANSVERSE MERCATOR GRID ZONE COLUMN ----- NO STATEMENT UTM GRID ZONE COLUMN UNDEFINED	0 1 THROUGH 60 61 THROUGH 63	IN THE UNIVERSAL TRANSVERSE MERCATOR (UTM) SYSTEM, AN AREA ON THE EARTH'S SURFACE BETWEEN NORTH- SOUTH COLUMNS MEASURING DEGREES EAST-WEST FROM 80 DEGREES SOUTH LATITUDE TO 84 DEGREES NORTH LATITUDE ORIGINATING AT THE 180- DEGREE MERIDIAN.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

TABLE J3-1. J3 Surveillance Word Applicability Table

INITIAL WORD	SUBLABEL							
	J3.0I REFERENCE POINT	J3.1I EMERGENCY POINT	J3.2I AIR TRACK	J3.3I SURFACE (MARITIME) TRACK	J3.4I SUBSURFACE (MARITIME) TRACK	J3.5I LAND (GROUND) POINT/TRACK	J3.6I SPACE TRACK	J3.7I ELECTRONIC WARFARE PRODUCT INFORMATION
EXTENSION WORD - 0	J3.0E0	J3.1E0	J3.2E0	J3.3E0	J3.4E0	J3.5E0	J3.6E0	
1							J3.6E1	
CONTINUATION WORD - 0								
1	J3.0C1 REFERENCE POINT WORD 1	J3.1C1 IFF/SIF	J3.2C1 AMPLIFICATION WORD 1	J3.3C1 AMPLIFICATION WORD 1	J3.4C1 AMPLIFICATION WORD 1	J3.5C1 LAND (GROUND) POINT/TRACK WORD 1	J3.6C1 SPACE TRACK WORD 1	J3.7C1 ELECTRONIC WARFARE PRODUCT INFORMATION WORD 1
2	J3.0C2 REFERENCE POINT WORD 2			J3.3C2 AMPLIFICATION WORD 2	J3.4C2 AMPLIFICATION WORD 2	J3.5C2 LAND (GROUND) POINT/TRACK WORD 2	J3.6C2 SPACE TRACK WORD 2	J3.7C2 ELECTRONIC WARFARE PRODUCT INFORMATION WORD 2
3	J3.0C3 REFERENCE POINT WORD 3					J3.5C3 LAND (GROUND) POINT/TRACK WORD 3	J3.6C3 SPACE TRACK WORD 3	J3.7C3 ELECTRONIC WARFARE PRODUCT INFORMATION WORD 3
4	J3.0C4 REFERENCE POINT WORD 4		J3.2C4 AMPLIFICATION WORD 4				J3.6C4 SPACE TRACK WORD 4	J3.7C4 ELECTRONIC WARFARE PRODUCT INFORMATION WORD 4
5	J3.0C5 REFERENCE POINT WORD 5						J3.6C5 SPACE TRACK WORD 5	J3.7C5 ELECTRONIC WARFARE PRODUCT INFORMATION WORD 5
...								
...								
31								

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

J3.0 MESSAGE SUMMARY

PURPOSE

The J3.0 Reference Point message is used to exchange tactical information about geographic references.

DATA ELEMENT SUMMARY

<u>J3.0I</u>		<u>J3.0C1 (Continued)</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	DELTA LONGITUDE, 0.0313 MINUTE	14
LABEL, J-SERIES	5	1	
SUBLABEL, J-SERIES	3	END POINT, 1	1
MESSAGE LENGTH INDICATOR	3	SPARE	2
EXERCISE INDICATOR	1	DELTA LATITUDE, 0.0313 MINUTE	14
RESPONSE INDICATOR	1	2	
FORCE TELL INDICATOR	1	DELTA LONGITUDE, 0.0313 MINUTE	14
SPARE	1	2	
SPECIAL PROCESSING INDICATOR	1	END POINT, 2	1
SIMULATION INDICATOR	1	SPARE	3
TRACK NUMBER, REFERENCE	19		
SLAVED INDICATOR	1		
LINE/AREA CONTINUATION	1	<u>J3.0C2</u>	
INDICATOR		DATA ELEMENT	# BITS
PERIODIC REPORT INDICATOR	2	WORD FORMAT	2
TIME FUNCTION	3	CONTINUATION WORD LABEL	5
POINT/LINE/AREA DESCRIPTOR, 1	2	SPEED	11
PRIORITY	3	SPARE	1
SPARE	1	TRACK NUMBER, RELATED	19
POINT TYPE	4	COURSE	9
POINT AMPLIFICATION	4	SPARE	1
MINUTE	6	SQUARE/CIRCLE SWITCH	2
hour	5	AXIS ORIENTATION	8
		AREA MAJOR AXIS	6
		AREA MINOR AXIS	6
<u>J3.0E0</u>		<u>J3.0C3</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	WORD FORMAT	2
TYPE OF BURST(3)*****	3	CONTINUATION WORD LABEL	5
SPARE(3)*****		CHANNEL NUMBER, SONOBUOY RF	7
LATITUDE, 0.0103 MINUTE	20	DEPTH INDICATOR (SONOBUOY)	2
ESTIMATED YIELD(2)*****	2	DEPTH, TRANSDUCER (SONOBUOY)	4
SPARE(2)*****		SONOBUOY TYPE	4
SPARE	1	SONOBUOY PATTERN	4
LONGITUDE, 0.0103 MINUTE	21	SONOBUOY TYPE NUMBER	5
ALTITUDE, 100 FT 1	10	SONOBUOY SPACING	9
ALTITUDE, 100 FT 2	10	SONOBUOY ROW SPACING	9
SPARE	1	SONOBUOY PATTERN RADIUS	9
<u>J3.0C1</u>		BEARING, ASW PLOT	9
DATA ELEMENT	# BITS	HOLDING CONTACT	1
WORD FORMAT	2		
CONTINUATION WORD LABEL	5	<u>J3.0C4</u>	
DELTA LATITUDE, 0.0313 MINUTE	14	DATA ELEMENT	# BITS
1		WORD FORMAT	2

MIL-STD-6016B

J3.0 MESSAGE SUMMARY (Continued)

DATA ELEMENT SUMMARY (Continued)

J3.0C4 (Continued)

DATA ELEMENT	# BITS
CONTINUATION WORD LABEL	5
TRACK NUMBER, RELATED 1	19
SONOBUOY TYPE, 1	4
SPARE	40

J3.0C5

DATA ELEMENT	# BITS
WORD FORMAT	2
CONTINUATION WORD LABEL	5
ENVIRONMENT/CATEGORY	3
AIR AMPLIFICATION(5)*****	
SURFACE (MARITIME)	*
AMPLIFICATION(5)	*
SUBSURFACE (MARITIME)	*
AMPLIFICATION(5)	*
LAND (GROUND) AMPLIFICATION(5)*	
SPACE AMPLIFICATION(5)	*
SPARE(5)*****	5
AMPLIFICATION CONFIDENCE	3
SQUARE/CIRCLE SWITCH	2
AXIS ORIENTATION	8
AREA MAJOR AXIS, 4	7
AREA MINOR AXIS, 4	7
SECOND	6
TRACK NUMBER, RELATED 2	19
CONNECT/DISCONNECT	1
SPARE	2

MIL-STD-6016B

J3.0 TRANSMIT/RECEIVE RULES

TITLE: Reference Point Message

TRANSMIT RULES

1. The J3.0 Reference Point message shall be transmitted in one of the word sequences described in Table J3-3.
2. Except when used to report the launch or impact point of a ballistic missile, or when reporting a Defended Asset (Point Type = 1, Point Amp = 11) or a Defended Area (Point Type = 5, Point Amp = 7), the J3.0 message shall be transmitted by the C² JU with R² once as follows:
 - a. When a reference point, line, or area is initially reported (Periodic Report Indicator set to value 1).
 - b. When assuming R² (Periodic Report Indicator set to value 2).
 - c. When data change (Periodic Report Indicator set to value 1).
 - d. When requested by a J7.1 (ACT = 1) Data Update Request by Track Number message (Periodic Report Indicator set to value 0 and Response Indicator set to value 1).
 - e. When requested by a J7.1 (ACT = 0) Data Update Request by Request Indicator message with the Reference Point Data Request Indicator set to value 1 (Periodic Report Indicator set to value 0 and Response Indicator set to value 1). The responding unit shall report only those multi-point areas and multi-segmented lines defined by more than one J3.0 message, for which R² is held.
 - f. When a force tell alert is initiated (Periodic Report Indicator set to value 1).
 - g. Periodically at a RRN = 3 (96 seconds, 1.2-2 minute interval), or at a RRN = 0 (12.8 minutes, 9.6-12.8 minute interval) for lines and areas

J3.0 TRANSMIT/RECEIVE RULES (Continued)

TRANSMIT RULES (Continued)

defined by more than one J3.0 message (Periodic Report Indicator set to value 2).

3. When a J3.0 message is used to report the launch or impact point of a ballistic missile, it shall be transmitted by the C² JU with R² once as follows:

a. When reporting a new launch or impact point on the interface (Periodic Report Indicator set to value 1).

b. In accordance with 2b, d, or f above.

c. Periodically at an RRN = 3 (96 seconds, 80-120 second interval). (Periodic Report Indicator set to value 2). The periodic timer shall be restarted when a J3.0 transmission is made due to data change or operator action in accordance with transmit rules 3d and e below.

d. When any data other than location and axis changes in the J3.0I, J3.0E0, or J3.0C5 but not more often than every 12 seconds.

e. When the impact point of a ballistic missile at apogee or beyond is being reported and any of the following occurs:

(1) The center point shifts 2 kilometers or more in any direction.

(2) If the major axis changes in size by a factor of at least 25 percent of the last reported value.

(3) If the minor axis changes in size by a factor of at least 50 percent of the last reported value.

Updates in accordance with this rule shall not be transmitted at a rate greater than once every 12 seconds.

J3.0 TRANSMIT/RECEIVE RULES (Continued)

TRANSMIT RULES (Continued)

f. The estimated launch point shall be transmitted for at least 2 periodic updates after the initial report.

4. When the J3.0 message is used to report Defended Asset (Point Type = 1, Point Amp = 11) or Defended Area (Point Type = 5, Point Amp = 7), it shall be transmitted by the C² JU with R² once as follows:

a. When initially reported (Periodic Report Indicator set to value 1).

b. When assuming R² (Periodic Report Indicator set to value 2).

c. When data change (Periodic Report Indicator set to value 1).

d. When a force tell alert is initiated (Periodic Report Indicator set to value 1).

5. When the J3.0 message is used to report/change Priority to an existing Defended Asset or Defended Area, a J3.0I word alone shall be sent once (Periodic Report Indicator set to value 0). When reporting a Defended Asset, the Priority field shall be set to a non-No Statement value.

6. When applicable, altitude shall be transmitted in a J3.0 message as follows and summarized in Table J3-2:

a. For Reference Points, Lines or 2 dimensional Areas with a designated altitude: Altitude 100 Ft, 1 shall be set to the designated altitude and Altitude 100 Ft, 2 shall be set to value 1023 (No Statement).

b. For a range, or a 3 dimensional Area: Altitude 100 Ft, 1 shall be set to the base (minimum) altitude, Altitude 100 Ft, 2 shall be set to the upper (maximum) altitude (a value greater than Altitude 100 Ft, 1).

c. For a Reference Point or Line with no altitude parameter: Altitude 100 Ft, 1 and Altitude 100 Ft, 2 shall be set to value 1023 (No Statement).

MIL-STD-6016B

J3.0 TRANSMIT/RECEIVE RULES (Continued)

TRANSMIT RULES (Continued)

d. If Altitude 100 Ft, 1 is set to value 1023 (No Statement) it shall be illegal to set Altitude 100 Ft, 2 to other than No Statement.

7. When J3.0 Point Type=7 (ASW Points) and Sonobuoy Position (Point Amp=9) or Sonobuoy Pattern Reference Position (Point Amp=10), provide the Sonobuoy Type in addition to other data. The type of sonobuoy is defined in one of two data fields in different continuation words; Sonobuoy Type in J3.0C3 or Sonobuoy Type, 1 in J3.0C4. The following transmit rules apply to both Point Amp=9 and Point Amp=10:

a. If the sonobuoy type is defined by the J3.0C3 Sonobuoy Type field, the J3.0C4 shall not be transmitted.

b. If the sonobuoy type is defined by the J3.0C4 Sonobuoy Type, 1 field:

(1) The J3.0C3 Sonobuoy Type shall be transmitted as No Statement (value=0).

(2) J3.0C4 shall be transmitted with Sonobuoy Type, 1 set to the appropriate data item.

RECEIVE RULES

1. Altitude in a received J3.0 message shall be interpreted as follows, and illustrated in Table J3-2:

a. If Altitude 100 Ft, 1 is other than value 1023 (No Statement) and Altitude 100 Ft, 2 is No Statement the reported altitude is the designated altitude associated with the reported Reference Point, Line or Area.

b. If Altitude 100 Ft, 1 is other than value 1023 (No Statement) and Altitude 100 Ft, 2 is also other than No Statement and greater than Altitude

J3.0 TRANSMIT/RECEIVE RULES (Continued)

RECEIVE RULES (Continued)

100 Ft, 1 the Reference Point, Line or Area has a minimum and maximum altitude boundary.

c. If both Altitude 100 Ft, 1 and Altitude 100 Ft, 2 are value 1023 (No Statement) the reported Reference Point, Line or Area has no associated altitude parameter.

d. If Altitude 100 Ft, 1 is value 1023 (No Statement) and Altitude 100 Ft, 2 is other than No Statement the message shall be discarded.

Table J3-2. Setting and Interpretation of Altitude for Reference Points, Lines and Areas

Case	Altitude 100 Ft, 1	Altitude 100 Ft, 2	Meaning
1	Altitude specified	No Statement	Designated altitude of Reference Point, Route, LLTR or Corridor.
2	Altitude specified	Altitude specified	Base (minimum) and upper (maximum) boundary of the Reference Point, route, corridor, LLTR or Area.
3	No Statement	Altitude specified	Illegal. Discard on receipt.
4	No Statement	No Statement	Reference Point, Line or Area has no altitude parameter.

2. If J3.0 ASW Point Sonobuoy Position (Point Amp=9) or Sonobuoy Pattern Reference Position(Point Amp=10) are received the associated sonobuoy type shall be derived as follows:

a. If a J3.0C4 word is not received, interpret the J3.0C3 Sonobuoy Type data element.

b. If J3.0C4 received and J3.0C3 Sonobuoy Type is other than No Statement (value≠0) interpret J3.0C3 Sonobuoy Type.

c. If J3.0C4 received and J3.0C3 Sonobuoy Type is No Statement (value=0) interpret Sonobuoy Type, 1.

TABLE J3-3. Required Word Sequences for Points, Lines and Areas

Type of Point/Line/Area	Limit of 3 Words Per Time Slot	More Than 3 Words Available Per Time Slot
Point - Fixed	J3.0I/J3.0E0, plus J3.0C3, followed by J3.0I/J3.0C4 if required for Point Type of 7 (ASW)	J3.0I/J3.0E0/J3.0C3/J3.0C4 for Point Type 7 (ASW) Point Amp 9 or 10 with Sonobuoy Type, 1
Point - Independent Course and Speed	J3.0I/J3.0E0/J3.0C2	
Point - Slaved True Without Altitude	J3.0I/J3.0C1/J3.0C2	
Point - Slaved Relative Without Altitude	J3.0I/J3.0C1/J3.0C4	
Point - Slaved True With Altitude	J3.0I/J3.0C1/J3.0C2, followed by a J3.0I/J3.0E0 sequence	J3.0I/J3.0E0/J3.0C1/J3.0C2
Point - Slaved Relative With Altitude	J3.0I/J3.0C1/J3.0C4, followed by a J3.0I/J3.0E0 sequence	J3.0I/J3.0E0/J3.0C1/J3.0C4
Line of 2 or 3 Points - Fixed	J3.0I/J3.0E0/J3.0C1	
Line of 2 or 3 Points - Independent Course and Speed	J3.0I/J3.0E0/J3.0C1, followed by a J3.0I/J3.0C2 sequence	J3.0I/J3.0E0/J3.0C1/J3.0C2
Line or Multisided Area of More Than 3 Points - Fixed	J3.0I/J3.0E0/J3.0C1, followed by as many additional J3.0I/J3.0E0/J3.0C1 sequences as are necessary	
Line or Multisided Area of More Than 3 Points - Independent Course and Speed	J3.0I/J3.0E0/J3.0C1, followed by a J3.0I/J3.0C2 sequence, and then by as many J3.0I/J3.0E0/J3.0C1 sequences as are necessary	J3.0I/J3.0E0/J3.0C1/J3.0C2, followed by as many additional J3.0I/J3.0E0/J3.0C1 sequences as are necessary
Line - Corridor or Low Level Transit Route of 2 or 3 Points.	J3.0I/J3.0E0/J3.0C1, followed by a J3.0I/J3.0C5 sequence	J3.0I/J3.0E0/J3.0C1/J3.0C5
Line - Corridor or Low Level Transit Route of More Than 3 Points	J3.0I/J3.0E0/J3.0C1, followed by a J3.0I/J3.0C5 sequence, and then by as many J3.0I/J3.0E0/J3.0C1, followed by J3.0I/J3.0C5 sequences as are necessary	J3.0I/J3.0E0/J3.0C1/J3.0C5, followed by as many additional J3.0I/J3.0E0/J3.0C1/J3.0C5 sequences as are necessary
Regular Area - Fixed	J3.0I/J3.0E0/J3.0C2, or J3.0I/J3.0E0/J3.0C5 for a FWDA or a ballistic missile launch or impact point.	
Regular Area - Independent Course and Speed	J3.0I/J3.0E0/J3.0C2	
Regular Area - Slaved True Without Altitude	J3.0I/J3.0C1/J3.0C2	
Regular Area - Slaved Relative Without Altitude	J3.0I/J3.0C1/J3.0C2, followed by a J3.0I/J3.0C4 sequence	J3.0I/J3.0C1/J3.0C2/J3.0C4
Regular Area - Slaved True With Altitude	J3.0I/J3.0C1/J3.0C2, followed by a J3.0I/J3.0E0 sequence	J3.0I/J3.0E0/J3.0C1/J3.0C2
Regular Area - Slaved Relative With Altitude	J3.0I/J3.0C1/J3.0C2, followed by a J3.0I/J3.0E0/J3.0C4 sequence	J3.0I/J3.0E0/J3.0C1/J3.0C2/J3.0C4

Note: In this table, the term 'regular area' is used to mean a square, circle, rectangle or ellipse i.e., defined by one point. The term 'multisided area' is used to denote an area that requires more than three points.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J3.0I

WORD TITLE: REFERENCE POINT INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00								
<---					:SIM:		:	:	:FT	:RSP	:EX	:	MESSAGE		:	SUBLABEL,		:					:	WORD		:						
					:IND:SPI		:SP	:	:IND	:IND	:IND	:	LENGTH		:	J-SERIES		:	LABEL, J-SERIES				:	FORMAT		:						
							:	:	:	:	:	:	INDICATOR		:			:					:			:						
					:	1	:	1	:	1	:	1	:	1	:	3	:	3	:	5				:	2	:						
:	49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25							
:	: PRIORITY		:	: PLA		:	: TIME		:	: LAC:SLV:		:																				
:			:	: DES, 1		:	: FUNCTION		:	: PER IND		:	: IND:IND:		:	TRACK NUMBER, REFERENCE																
:			:			:			:			:			:																	
:	3		:	2		:	3		:	2		:	1		:	1		:	19													
					:	69	68	67	66	65	:	64	63	62	61	60	59	:	58	57	56	55	:	54	53	52	51	:	50			
					:	HOUR				:	MINUTE				:	POINT				:	AMPLIFICATION				:	POINT TYPE				:	SP	:
					:					:					:					:					:					:		:
					:	5				:	6				:	4				:	4				:	1				:		:

WORD DESCRIPTION

WORD NUMBER: J3.0I

WORD TITLE: REFERENCE POINT INITIAL WORD

REFERENCE DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	00
270 004	LABEL, J-SERIES	2-	6 5	00011
271 005	SUBLABEL, J-SERIES	7-	9 3	000
800 001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
385 003	EXERCISE INDICATOR (EX IND)	13	1	
710 003	RESPONSE INDICATOR (RSP IND)	14	1	
354 002	FORCE TELL INDICATOR (FT IND)	15	1	
756 001	SPARE (SP)	16	1	
292 002	SPECIAL PROCESSING INDICATOR (SPI)	17	1	
1604 001	SIMULATION INDICATOR (SIM IND)	18	1	
769 002	TRACK NUMBER, REFERENCE	19-	37 19	
1716 001	SLAVED INDICATOR (SLV IND)	38	1	
1720 001	LINE/AREA CONTINUATION INDICATOR (LAC IND)	39	1	
549 001	PERIODIC REPORT INDICATOR (PER IND)	40-	41 2	
1681 001	TIME FUNCTION	42-	44 3	
1554 002	POINT/LINE/AREA DESCRIPTOR, 1 (PLA DES, 1)	45-	46 2	
1816 002	PRIORITY	47-	49 3	
756 001	SPARE (SP)	50	1	
363 003	POINT TYPE	51-	54 4	SEE NOTE 1.
379 002	POINT AMPLIFICATION	55-	58 4	SEE NOTE 1.
797 004	MINUTE	59-	64 6	
792 001	HOUR	65-	69 5	

J3.0I WORD NOTES

NOTE 1 Point Type/Point Amplification (Sheet 1 of 2)

POINT AMP	POINT TYPE					
	0	1	2	3	4	5
	HAZARD	REFERENCE POINT (GENERAL)	STATION (GENERAL)	STATION (AIR)	LINE	AREA (GENERAL)
0	NO STATEMENT	NO STATEMENT	NO STATEMENT	NO STATEMENT	NO STATEMENT	NO STATEMENT
1	NAVIGATION	MARSHALL POINT	TOMCAT	COMBAT AIR PATROL (CAP)	FORWARD EDGE OF THE BATTLE AREA	SEARCH
2	MINE	WAYPOINT	PICKET	AIRBORNE EARLY WARNING (AEW)	GUN TARGET LINE	RESTRICTED
3	IMPACT POINT	CORRIDOR TAB	RENDEZVOUS	ANTISUBMARINE WARFARE (ASW) FIXED WING	CORRIDOR	EXERCISE
4	GROUND ZERO	POSITION AND INTENDED MOVEMENT (PIM)	UNDEFINED	ANTISUBMARINE WARFARE (ASW) HELICOPTER (HELO)	HOSTILE BOUNDARY	SUBMARINE PATROL AREA
5	AIM/WEAPON ENTRY POINT	DISPOSITION CENTER	REPLENISHMENT	REPLENISHMENT	BUFFER ZONE BOUNDARY	FIGHTER ENGAGEMENT ZONE/FIGHTER AOR
6	MISSILE LAUNCH POINT	FORMATION CENTER	RESCUE	STRIKE INITIAL POINT (IP)	LOW LEVEL TRANSIT ROUTE	GROUND AREA OF RESPONSIBILITY
7	ELECTRONIC ATTACK (EA) DECOY	SEARCH AREA	UNDEFINED	TACAN	TACTICAL ACTION LINE	DEFENDED AREA
8	ENGAGEMENT POINT	VICTOR LIMA (VL)	UNDEFINED	TANKER	FIRE SUPPORT COORDINATION LINE (FSCL)	UNDEFINED
9	OIL RIG	SUBMARINE POSITION AND INTENDED MOVEMENT (SIM)	UNDEFINED	ORBIT, RACE TRACK	FORWARD LINE OF OWN TROOPS (FLOT)	UNDEFINED
10	UNDEFINED	UNDEFINED	UNDEFINED	ORBIT, FIGURE EIGHT	UNDEFINED	UNDEFINED
11	UNDEFINED	DEFENDED ASSET	UNDEFINED	ORBIT, RANDOM CLOSED	UNDEFINED	UNDEFINED
12	UNDEFINED	UNDEFINED	UNDEFINED	ORBIT POINT	UNDEFINED	UNDEFINED
13	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
14-15	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED

J3.0I WORD NOTES

NOTE 1 (continued) Point Type/Point Amplification (Sheet 2 of 2)

POINT AMP	POINT TYPE			
	6	7	8	9-15
	AREA (HAZARD)	ASW	ASW, 1	UNDEFINED
0	NO STATEMENT	NO STATEMENT	CHARTED WRECK	UNDEFINED
1	DANGER	SINKER	BOTTOMED NONSUBMARINE	UNDEFINED
2	CONTAMINATED	BRIEF CONTACT	ASW STATION	UNDEFINED
3	ALLIED MISSILE ENGAGEMENT ZONE	SEARCH CENTER (ASW)	UNDEFINED	UNDEFINED
4	HOSTILE MISSILE ENGAGEMENT ZONE	ESTIMATED POSITION (EP)	UNDEFINED	UNDEFINED
5	HOSTILE WEAPON ZONE	FIX (ASW)	UNDEFINED	UNDEFINED
6	HOSTILE TACTICAL AREA	NOTACK AREA	UNDEFINED	UNDEFINED
7	SHORAD	MOVING HAVEN	UNDEFINED	UNDEFINED
8	KILL ZONE	DATUM	UNDEFINED	UNDEFINED
9	TARGET AREA OF INTEREST	SONOBOUY POSITION	UNDEFINED	UNDEFINED
10	NAMED AREA OF INTEREST (NAI)	SONOBOUY PATTERN REFERENCE POSITION	UNDEFINED	UNDEFINED
11	UNDEFINED	LIMITING LINE OF APPROACH	UNDEFINED	UNDEFINED
12	UNDEFINED	AREA OF PROBABILITY (ASW)	UNDEFINED	UNDEFINED
13	UNDEFINED	FRIENDLY WEAPON DANGER AREA (FWDA)	UNDEFINED	UNDEFINED
14-15	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED

FIELD CODING FOR J3.0I (SHEET 1)				
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
385	003	EXERCISE INDICATOR -----		INDICATES WHETHER OR NOT THE MESSAGE IDENTIFIES AN EXERCISE TRACK.
		NON-EXERCISE TRACK	0	
		EXERCISE TRACK OR UNIT	1	
710	003	RESPONSE INDICATOR -----		THIS FIELD INDICATES WHETHER OR NOT THE MESSAGE IS IN RESPONSE TO A DATA UPDATE REQUEST.
		NOT RESPONDING	0	MESSAGE IS NOT IN RESPONSE TO DATA UPDATE REQUEST.
		RESPONDING	1	MESSAGE IS IN RESPONSE TO DATA UPDATE REQUEST.
354	002	FORCE TELL INDICATOR -----		THIS INDICATOR CAUSES TRACK/POINT DATA TO BE FORCED THROUGH CONTROLLABLE RECEIVE FILTERS.
		NO STATEMENT	0	
		FORCE TELL STATUS	1	
292	002	SPECIAL PROCESSING INDICATOR -----		INDICATES THAT A MESSAGE REQUIRES SPECIAL PROCESSING.
		SPECIAL PROCESSING NOT REQUIRED	0	
		SPECIAL PROCESSING REQUIRED	1	
1604	001	SIMULATION INDICATOR -----		INDICATES WHETHER THE TRACK REFERENCED IN THE MESSAGE IS A REAL OR A SIMULATED TRACK.
		REAL TRACK OR UNIT	0	
		SIMULATED TRACK OR UNIT	1	
769	002	TRACK NUMBER, REFERENCE -----		A REFERENCE NUMBER USED TO ASSOCIATE INFORMATION AND DIRECTIVES WITH THE TRACK. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE-

FIELD CODING FOR J3.0I (SHEET 2)				
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	

BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6
00111	7
01000	A
01001	B
01010	C
01011	D
01100	E
01101	F
01110	G
01111	H
10000	J
10001	K
10010	L
10011	M
10100	N
10101	P
10110	Q
10111	R
11000	S
11001	T
11010	U

FIELD CODING FOR J3.0I			(SHEET 3)
DFI	DUI	DUI/DI NAME	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)
			11011 V
			11100 W
			11101 X
			11110 Y
			11111 Z
		00000	0
		00001-00076	1 THROUGH 62
		00077	63
		00100-00175	64 THROUGH 125
		00176	126
		00177	127
		00200-07776	128 THROUGH 4094
		07777	4095
		0A000-0Z777	4096 THROUGH 16383
		10000-17777	16384 THROUGH 20479
		1A000-1Z777	20480 THROUGH 32767
		20000-27777	32768 THROUGH 36863
		2A000-2Z777	36864 THROUGH 49151
		30000-37777	49152 THROUGH 53247

NO STATEMENT.
 ASSIGNED AS IDENTIFICATION NUMBERS
 FOR C2 IUS (JU, PU, FJU, AND FPU).
 ILLEGAL.
 ASSIGNED AS IDENTIFICATION NUMBERS
 FOR C2 IUS (JU, RU, FJU, AND FRU).
 RESERVED FOR USE AS THE PSEUDO
 SOURCE TRACK NUMBER ADDRESS.
 COLLECTIVE ADDRESS.
 ASSIGNED AS IDENTIFICATION NUMBERS
 FOR JUS AND ALLOCATED IN BLOCKS TO
 C2 IUS TO BE USED FOR TACTICAL
 INFORMATION REPORTING, E.G.,
 TRACKS AND REFERENCE POINTS.
 ILLEGAL.
 ALLOCATED IN BLOCKS TO C2 JUS TO BE
 USED FOR TACTICAL INFORMATION
 REPORTING, E.G., TRACKS AND
 REFERENCE POINTS.
 ASSIGNED AS IDENTIFICATION NUMBERS
 FOR JUS AND ALLOCATED IN BLOCKS TO
 C2 JUS TO BE USED FOR TACTICAL
 INFORMATION REPORTING, E.G.,
 TRACKS AND REFERENCE POINTS.
 ALLOCATED IN BLOCKS TO C2 JUS TO BE
 USED FOR TACTICAL INFORMATION
 REPORTING, E.G., TRACKS AND
 REFERENCE POINTS.
 ASSIGNED AS IDENTIFICATION NUMBERS
 FOR JUS AND ALLOCATED IN BLOCKS TO
 C2 JUS TO BE USED FOR TACTICAL
 INFORMATION REPORTING, E.G.,
 TRACKS AND REFERENCE POINTS.
 ALLOCATED IN BLOCKS TO C2 JUS TO BE
 USED FOR TACTICAL INFORMATION
 REPORTING, E.G., TRACKS AND
 REFERENCE POINTS.
 ASSIGNED AS IDENTIFICATION NUMBERS

			FIELD CODING FOR J3.0I	(SHEET 4)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
				FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		70000-77776	114688 THROUGH 118782	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE

FIELD CODING FOR J3.0I				(SHEET 5)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
1716	001	SLAVED INDICATOR -----		USED TO INDICATE WHETHER OR NOT THE POINT DESCRIBED IN THE MESSAGE IS SLAVED TO THE UNIT SPECIFIED IN THE RELATED TN FIELD.
		NOT SLAVED	0	THE POINT DESCRIBED IN THIS MESSAGE IS NOT SLAVED TO ANY UNIT.
		SLAVED	1	THE POINT DESCRIBED IN THIS MESSAGE IS SLAVED TO THE UNIT SPECIFIED IN THE RELATED TN FIELD.
1720	001	LINE/AREA CONTINUATION INDICATOR -----		THIS FIELD IS USED TO DESCRIBE THE RELATIONSHIP OF THE POINTS' LOCATION DESCRIBED IN THE EXTEN- SION WORD OF THIS MESSAGE WITH POINTS THAT HAVE BEEN DESCRIBED IN PREVIOUS MESSAGES. IT ALSO INDICATES THAT THE POINTS DESCRIBED IN THIS MESSAGE SHOULD BE JOINED TO FORM A SEGMENTED LINE OR A MULTI-SIDED AREA DEPENDING ON THE VALUE OF THE POINT/LINE/AREA DESCRIPTOR, 1.
		NO STATEMENT	0	
		LINE/AREA CONTINUATION	1	THE LATITUDE AND LONGITUDE FIELDS IN THE EXTENSION WORD OF THIS MESSAGE DESCRIBE A POINT THAT IS COINCI- DENT WITH THE LAST POINT TRANS- MITTED IN A PREVIOUS MESSAGE. THE POINTS DESCRIBED IN THIS MESSAGE SHOULD BE JOINED TO FORM A SEG- MENTED LINE OR A MULTI-SIDED AREA DEPENDING ON THE VALUE OF THE POINT/LINE/AREA DESCRIPTOR, 1.
549	001	PERIODIC REPORT INDICATOR -----		INDICATES THE TYPE OF REPORT.
		NO STATEMENT	0	
		ORIGINAL/CHANGE	1	THIS IS AN ORIGINAL MESSAGE OR A MESSAGE TRANSMITTED BECAUSE OF

			FIELD CODING FOR J3.01	(SHEET 6)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
549	001	PERIODIC REPORT INDICATOR -----	(CONTINUED)	
		PERIODIC	2	DATA CHANGE.
		UNDEFINED	3	THIS IS A PERIODIC UPDATE.
1681	001	TIME FUNCTION -----		USED IN CONJUNCTION WITH THE MINUTE AND HOUR FIELDS TO DESCRIBE THE TIME FUNCTION ASSOCIATED WITH THE REPORTED TIME.
		NO STATEMENT	0	
		ACTIVATION TIME	1	
		DEACTIVATION TIME	2	
		ARRIVAL TIME	3	
		DEPARTURE TIME	4	
		TIME POINT ESTABLISHED	5	THE TIME THE REPORTED POSITION FOR THE POINT WAS ESTABLISHED. THIS MAY BE A TIME PRIOR TO DATA ENTRY.
		NON-OP TIME	6	THE TIME THE SITE IS EXPECTED TO BECOME LESS THAN FULLY OPERATIONAL.
		OP TIME	7	THE TIME THE SITE IS EXPECTED TO RETURN FULLY OPERATIONAL.
1554	002	POINT/LINE/AREA DESCRIPTOR, 1 -----		DEFINES WHETHER THE MESSAGE IS DESCRIBING A POINT, SINGLE POINT AREA, LINE, OR MULTI-POINT AREA.
		POINT	0	A SINGLE POINT.
		SINGLE POINT AREA	1	A SQUARE, RECTANGLE, CIRCLE OR ELLIPSE DEFINED USING A SINGLE POINT.
		LINE	2	TWO OR MORE POINTS WHERE THE FIRST AND LAST DO NOT COINCIDE.
		MULTI-POINT AREA	3	FOUR OR MORE POINTS WHERE THE FIRST AND LAST COINCIDE TO FORM AN AREA.
1816	002	PRIORITY -----		ASSIGNS NUMERICAL PRIORITY (WITH 1 BEING THE HIGHEST) OF A POINT OR AREA PREVIOUSLY REPORTED OR BEING REPORTED AS TN, REFERENCE IN THIS WORD. THE MEANING OF THE PRIORITY IS DEFINED BY THE OPERATIONAL COMMANDER.
		NO STATEMENT	0	
		1 THROUGH 7	1 THROUGH 7	

			FIELD CODING FOR J3.0I	(SHEET 7)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
363	003	POINT TYPE -----		EXPRESSES THE NATURE, KIND, OR CHARACTER OF A POINT.
		HAZARD	0	
		REFERENCE POINT (GENERAL)	1	
		STATION (GENERAL)	2	
		STATION (AIR)	3	
		LINE	4	
		AREA (GENERAL)	5	
		AREA (HAZARD)	6	
		ASW	7	
		ASW, 1	8	
		UNDEFINED	9 THROUGH 15	
379	002	POINT AMPLIFICATION -----		USED IN CONJUNCTION WITH POINT TYPE TO DEFINE THE IDENTITY OF A POINT.
		----- FOR HAZARD (0) -----		
		NO STATEMENT	0	A GENERAL HAZARD POINT THAT MUST BE AMPLIFIED BY VOICE OR PREDETERMINED PROCEDURES.
		NAVIGATION	1	A POINT THAT INDICATES ANY HAZARD TO NAVIGATION IRRESPECTIVE OF ENVIRONMENT/CATEGORY I.E., SHIPWRECK, TALL ANTENNA, ETC.
		MINE	2	A POINT AT WHICH A MINE OR MINES IS/ ARE LOCATED.
		IMPACT POINT	3	THE REAL OR EXPECTED POINT THAT A DEVICE HAS OR WILL PENETRATE OR CONTACT A SURFACE.
		GROUND ZERO	4	A POINT ON THE SURFACE OF THE EARTH AT, OR DIRECTLY BELOW OR ABOVE, THE CENTER OF A PLANNED OR ACTUAL NUCLEAR DETONATION.
		AIM/WEAPON ENTRY POINT	5	A POINT THAT A DEVICE IS INTENDED TO PASS THROUGH PRIOR TO ARRIVAL AT THE FINAL DESTINATION OR TARGET. PRIMARYLY USED IN MARITIME OPERATIONS TO INDICATE THE WATER ENTRY POINT FOR AN ASW WEAPON.
		MISSILE LAUNCH POINT	6	A POINT INDICATING THE POSITION FROM WHICH A MISSILE HAS BEEN OR WILL

			FIELD CODING FOR J3.0I		(SHEET 8)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION	
379	002	POINT AMPLIFICATION -----	(CONTINUED)		
		ELECTRONIC ATTACK (EA) DECOY	7	BE LAUNCHED. A POINT AT WHICH A DEVICE IS LOCATED THAT PRODUCES FALSE TARGETS, I.E., TARGET GENERATION, CHAFF, AND CONFUSION DEFLECTOR.	
		ENGAGEMENT POINT	8	THE REAL OR EXPECTED POINT AT WHICH ORDNANCE IS BEING OR WILL BE DELIVERED AGAINST A GROUND TARGET.	
		OIL RIG	9	A POINT AT WHICH AN OIL RIG IS LOCATED.	
		UNDEFINED	10 THROUGH 15		
		----- FOR REFERENCE POINT (GENERAL) (1) -----			
		NO STATEMENT	0	A GENERAL NONHAZARD REFERENCE POINT THAT MUST BE AMPLIFIED BY VOICE OR PREDETERMINED PROCEDURES.	
		MARSHALL POINT	1	A POINT USED TO ASSEMBLE, HOLD, OR ORGANIZE TROOPS, AIRCRAFT, OR SHIPS FOR A MISSION.	
		WAYPOINT	2	A POINT IN SPACE TO WHICH AN AIRCRAFT MAY BE VECTORED.	
		CORRIDOR TAB	3	A POINT DEFINING THE BOUNDARY OF A CORRIDOR.	
		POSITION AND INTENDED MOVEMENT (PIM)	4	A REFERENCE POINT ESTABLISHED BY THE OFFICER IN TACTICAL COMMAND AT A GIVEN TIME, AND A FORECAST OF THE COURSE(S) AND SPEED(S) EXPECTED TO BE MADE GOOD OVER THE GROUND. PIMS ARE ESTABLISHED TO ASSIST THE RETURN OF AIRCRAFT, TO AID OUTLYING SURFACE UNITS IN MAINTAINING THEIR STATIONS, AND FOR RENDEZVOUS PURPOSES.	
		DISPOSITION CENTER	5	A POINT DESIGNATED AS THE CENTER OF A PRESCRIBED ARRANGEMENT OF STATIONS TO BE OCCUPIED BY SEVERAL FORMATIONS AND SINGLE SHIPS OF A FLEET OR MAJOR SUBDIVISIONS OF A FLEET FOR SUBPURPOSE, SUCH AS	

			FIELD CODING FOR J3.0I		(SHEET 9)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION	
379	002	POINT AMPLIFICATION -----	(CONTINUED)		
				CRUISING, APPROACH, MAINTAINING CONTACT OR BATTLE. A PRESCRIBED ARRANGEMENT OF ALL THE TACTICAL UNITS COMPOSING A FLIGHT OR GROUP OF AIRCRAFT.	
		FORMATION CENTER	6	A POINT DESIGNATED AS THE CENTER OF AN ORDERED ARRANGEMENT OF UNITS, NORMALLY THE GEOMETRIC CENTER. IT IS THE POINT OF ORIGIN OF A FORMATION AXIS.	
		SEARCH AREA	7	THE CENTER OF A SEARCH AREA.	
		VICTOR LIMA (VL)	8	THE REFERENCE POINT FOR AIRCRAFT CONDUCTING VECTOR LOGIC TACTICS ON LINK 4A. EQUIVALENT TO LINK 4A DATA LINK REFERENCE POINT.	
		SUBMARINE POSITION AND INTENDED MOVEMENT (SIM)	9	A REFERENCE POINT DEFINING THE GEOGRAPHIC POSITION AND INTENDED MOVEMENT OF A SUBMARINE OPERATING IN DIRECT SUPPORT OF A BATTLE GROUP, OR OF A SUBMARINE PATROL AREA (SPA).	
		UNDEFINED	10		
		DEFENDED ASSET	11	A LOCATION OR FACILITY DESIGNATED AS HAVING TACTICAL SIGNIFICANCE AND DEFENDED BY AIR DEFENSE RESOURCES.	
		UNDEFINED	12 THROUGH 15		
		----- FOR STATION (GENERAL) (2) -----			
		NO STATEMENT	0	A GENERAL POINT DESCRIBING A NONAIR STATION THAT MUST BE AMPLIFIED BY VOICE OR PREDETERMINED PROCEDURES.	
		TOMCAT	1	A POINT OCCUPIED BY A SURFACE UNIT CAPABLE OF PERFORMING AIR CONTROL FUNCTIONS WHOSE PURPOSE IS TO SCREEN RETURNING AIRCRAFT TO PREVENT ENEMY AIRCRAFT FROM LOCATING THE FORCE.	
		PICKET	2	A POINT OUTSIDE A FORMATION OR GEOGRAPHIC AREA WHERE AN AIRCRAFT	

		FIELD CODING FOR J3.0I		(SHEET 10)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
379	002	POINT AMPLIFICATION -----	(CONTINUED)	
		RENDEZVOUS	3	OR SHIP IS STATIONED AS A RESCUE OR WARNING UNIT. A POINT FOR A PREARRANGED MEETING AT A GIVEN TIME AND LOCATION FROM WHICH TO BEGIN AN ACTION OR PHASE OF AN OPERATION OR TO WHICH TO RETURN, AFTER AN OPERATION.
		UNDEFINED	4	
		REPLENISHMENT	5	A POINT WHERE REARMING AND RESUPPLY OF UNITS OTHER THAN AIRCRAFT MAY BE CONDUCTED.
		RESCUE	6	A POINT USED TO MARK THE POSITION OF A RESCUE OPERATION.
		UNDEFINED	7 THROUGH 15	
		----- FOR STATION (AIR) (3) -----		
		NO STATEMENT	0	A GENERAL POINT DESCRIBING AN AIR STATION THAT MUST BE AMPLIFIED BY VOICE OR PREDETERMINED PROCEDURES.
		COMBAT AIR PATROL (CAP)	1	A POINT AT WHICH CAP AIRCRAFT ARE OR WILL BE ORBITING OR MANEUVERING.
		AIRBORNE EARLY WARNING (AEW)	2	A POINT AT WHICH AEW AIRCRAFT ARE OR WILL BE ORBITING OR MANEUVERING.
		ANTISUBMARINE WARFARE (ASW) FIXED WING	3	A POINT DENOTING A STATION WHERE A FIXED WING AIRCRAFT ON AN ANTISUBMARINE WARFARE MISSION WILL OPERATE.
		ANTISUBMARINE WARFARE (ASW) HELICOPTER (HELO)	4	A POINT DENOTING A STATION WHERE A HELICOPTER WHOSE MISSION IS ANTISUBMARINE WARFARE WILL OPERATE.
		REPLENISHMENT	5	A POINT WHERE AIRCRAFT REARMING AND RESUPPLY MAY BE CONDUCTED.
		STRIKE INITIAL POINT (IP)	6	A POINT IN SPACE THAT AIRCRAFT RENDEZVOUS OR PASS THROUGH PRIOR TO ATTACKING A GROUND TARGET.
		TACAN	7	A POINT AT WHICH A TACAN IS LOCATED.
		TANKER	8	A POINT AT WHICH A TANKER AIRCRAFT IS OR WILL BE ORBITING OR MANEUVERING.

			FIELD CODING FOR J3.0I	(SHEET 11)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
379	002	POINT AMPLIFICATION	(CONTINUED)	

		ORBIT, RACE TRACK	9	AN OVAL WITHIN A RECTANGLE THAT THE AIRCRAFT IS OR WILL BE TRACKING.
		ORBIT, FIGURE EIGHT	10	A FIGURE EIGHT PATTERN WITHIN A RECTANGLE THAT THE AIRCRAFT IS OR WILL BE TRACKING.
		ORBIT, RANDOM CLOSED	11	A RECTANGLE IN WHICH THE AIRCRAFT WILL TRACK RANDOMLY.
		ORBIT POINT	12	A POINT DESIGNATED FOR AN AIRCRAFT TO ORBIT.
		UNDEFINED	13 THROUGH 15	

		FOR LINE (4)		

		NO STATEMENT	0	A GENERAL LINE THAT MUST BE AMPLIFIED BY VOICE OR PREDETERMINED PROCEDURES.
		FORWARD EDGE OF THE BATTLE AREA	1	THE FOREMOST LIMITS OF A SERIES OF AREAS IN WHICH GROUND COMBAT UNITS ARE DEPLOYED, EXCLUDING THE AREAS IN WHICH THE COVERING OR SCREENING FORCES ARE OPERATING.
		GUN TARGET LINE	2	A STRAIGHT LINE FROM THE GUN(S) TO THE TARGET. ALTITUDE, IF INCLUDED, IS THE APEX OF THE PROJECTILE.
		CORRIDOR	3	A LINE DESCRIBING THE CENTER OF A ROUTE DESIGNATED FOR TRAVEL BY FRIENDLY AIRCRAFT.
		HOSTILE BOUNDARY	4	A LINE THAT INDICATES A LIMIT BEYOND WHICH EXISTS A HOSTILE ENVIRONMENT.
		BUFFER ZONE BOUNDARY	5	A LINE BEYOND WHICH FRIENDLY AIRCRAFT USUALLY DO NOT FLY IN PEACETIME.
		LOW LEVEL TRANSIT ROUTE	6	A LINE DESCRIBING THE CENTER LINE OF A ROUTE THROUGH THE FORWARD MISSILE ENGAGEMENT ZONE (MEZ) THAT MUST BE FLOWN BY FRIENDLY AIRCRAFT TO ENSURE THEY ARE NOT DESIGNATED HOSTILE BY DEFENSE SYSTEMS.
		TACTICAL ACTION LINE	7	A LINE POSITIONED IN HOSTILE

		FIELD CODING FOR J3.0I		(SHEET 12)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
379	002	POINT AMPLIFICATION -----	(CONTINUED)	
		FIRE SUPPORT COORDINATION LINE (FSCL)	8	AIRSPACE WHICH MAY BE USED IN CONJUNCTION WITH OTHER CRITERIA FOR HOSTILE DETERMINATION. A LINE ESTABLISHED BY THE APPROPRIATE GROUND COMMANDER TO ENSURE COORDINATION OF FIRE NOT UNDER HIS COMMAND BUT WHICH MAY AFFECT CURRENT TACTICAL OPERATIONS. ATTACKS AGAINST GROUND TARGETS BEHIND THIS LINE MUST BE COORDINATED WITH THE APPROPRIATE GROUND COMMANDER.
		FORWARD LINE OF OWN TROOPS (FLOT)	9	A LINE DEFINING THE FORWARD POSITION OF OWN TROOPS WITHIN A GROUND AREA OF RESPONSIBILITY, THAT DOES NOT USUALLY COINCIDE WITH THE FEBA.
		UNDEFINED ----- FOR AREA (GENERAL) (5) -----	10 THROUGH 15	
		NO STATEMENT	0	A GENERAL NONHAZARD AREA THAT MUST BE AMPLIFIED BY VOICE OR PREDETERMINED PROCEDURES.
		SEARCH	1	AN AREA WHERE A SEARCH IS BEING OR WILL BE CONDUCTED. NORMALLY ASSOCIATED WITH A SAR MISSION.
		RESTRICTED	2	A SPECIFIED AREA DESIGNATED BY THE AREA AIRSPACE MANAGEMENT AUTHORITY WHERE FLIGHT IS RESTRICTED WITHOUT PRIOR APPROVAL.
		EXERCISE	3	AN AREA FOR MILITARY MANEUVER OR SIMULATED WARTIME OPERATION INVOLVING PLANNING, PREPARATION AND EXECUTION.
		SUBMARINE PATROL AREA	4	A RESTRICTED AREA ESTABLISHED TO ALLOW SUBMARINE OPERATIONS TO BE UNIMPEDED BY THE OPERATION, OR POSSIBLE ATTACK FROM FRIENDLY FORCES IN WARTIME, OR TO BE CONDUCTED WITHOUT SUBMERGED MUTUAL INTERFERENCE IN PEACETIME.

			FIELD CODING FOR J3.01		(SHEET 13)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION	
379	002	POINT AMPLIFICATION	(CONTINUED)		

		FIGHTER ENGAGEMENT ZONE/ FIGHTER AOR	5	AIRSPACE OF DEFINED DIMENSIONS WITHIN WHICH THE RESPONSIBILITY FOR ENGAGEMENT NORMALLY RESTS WITH FIGHTER AIRCRAFT.	
		GROUND AREA OF RESPONSIBILITY	6	AREA OF GROUND WITHIN WHICH THE RESPONSIBILITY FOR ENGAGEMENT NORMALLY RESTS WITH THE APPROPRIATE GROUND FORCE COMMANDER.	
		DEFENDED AREA	7	AN AREA THE SOURCE TN IS CAPABLE OF DEFENDING AGAINST BALLISTIC MISSILES, ETC., (I.E. THE SOURCE TN IS OPERATIONAL WITH READY WEAPONS AND HAS DESIGNATED THE AREA FOR DEFENSE).	
		UNDEFINED	8 THROUGH 15		

		FOR AREA (HAZARD) (6)			

		NO STATEMENT	0	A GENERAL HAZARD AREA THAT MUST BE AMPLIFIED BY VOICE OR PREDETERMINED PROCEDURES.	
		DANGER	1	A SPECIFIED AREA ABOVE, BELOW, OR WITHIN WHICH THERE MAY BE A POTENTIAL DANGER.	
		CONTAMINATED	2	AN AREA CAUSED BY THE DEPOSIT AND/OR ABSORPTION OF RADIOACTIVE MATERIAL, OR OF BIOLOGICAL OR CHEMICAL AGENTS ON AND BY STRUCTURES, AREAS, PERSONNEL, OR OBJECTS.	
		ALLIED MISSILE ENGAGEMENT ZONE	3	PRIMARY ENGAGEMENT AREA DESIGNATED FOR FRIENDLY SURFACE TO AIR MISSILES.	
		HOSTILE MISSILE ENGAGEMENT ZONE	4	AN AREA IN WHICH HOSTILE SURFACE-TO- AIR MISSILES (SAMS) ARE CAPABLE OF ENGAGEMENT.	
		HOSTILE WEAPON ZONE	5	AN AREA IN WHICH HOSTILE ANTIAIRCRAFT ARTILLERY (AAA) IS CAPABLE OF ENGAGEMENT.	
		HOSTILE TACTICAL ZONE	6	AN AREA IN WHICH HOSTILE TACTICAL	

		FIELD CODING FOR J3.0I		(SHEET 14)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
379	002	POINT AMPLIFICATION -----	(CONTINUED)	
				FORCES (TO INCLUDE GROUND, AIR, OR MARITIME) ARE KNOWN TO BE OR WILL BE OPERATING.
		SHORAD	7	AN AREA DEFENDED BY FRIENDLY ARMY SHORT RANGE AIR DEFENSE SYSTEMS.
		KILL ZONE	8	AN AIR DEFENSE SYSTEM (SOC) AREA IN WHICH FRIENDLY FIGHTERS MAY USE LESS RESTRICTIVE RULES OF ENGAGEMENT.
		TARGET AREA OF INTEREST	9	AN ENGAGEMENT AREA USUALLY ALONG AN ENEMY MOBILITY CORRIDOR.
		NAMED AREA OF INTEREST (NAI)	10	AN AREA USUALLY ALONG AN ENEMY MOBILITY CORRIDOR WHERE ENEMY ACTIVITY (OR INACTIVITY) CONFIRMS A PARTICULAR COURSE OF ACTION.
		UNDEFINED	11 THROUGH 15	
		----- FOR ASW (7) -----		
		NO STATEMENT	0	A GENERAL ASW POINT, LINE, OR AREA THAT MUST BE AMPLIFIED BY VOICE OR PREDETERMINED PROCEDURES.
		SINKER	1	A RADAR CONTACT THAT LATER DISAPPEARED.
		BRIEF CONTACT	2	A CONTACT THAT WAS NOT HELD LONG ENOUGH TO GENERATE COURSE AND SPEED INFORMATION.
		SEARCH CENTER (ASW)	3	A GEOGRAPHICALLY FIXED ORIGIN OR REFERENCE POINT OF AN ASW SEARCH WHEN ESTABLISHED AT A POINT OTHER THAN DATUM.
		ESTIMATED POSITION (EP)	4	AN ASSUMED POSITION BASED UPON INPUT FROM NONSENSOR INPUTS.
		FIX (ASW)	5	A CORRELATED POSITION OF A SUBMARINE DERIVED FROM TWO OR MORE SENSOR INPUTS.
		NOTACK AREA	6	A SMALL AREA ESTABLISHED BY THE SUBMARINE WITHIN THE SPA TO ALLOW FRIENDLY FORCES TO PROSECUTE A SUBMARINE CONTACT WITHIN THE REMAINDER OF THE SPA WHILE

			FIELD CODING FOR J3.0I		(SHEET 15)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION	
379	002	POINT AMPLIFICATION -----	(CONTINUED)		
		MOVING HAVEN	7	CONTINUING TO PROVIDE PROTECTION TO THE SUBMARINE.	
		DISUSED SONOBUOY POSITION	8 9	RESTRICTED AREAS ESTABLISHED TO PROVIDE A MEASURE OF SECURITY TO SUBMARINES AND SURFACE SHIPS IN TRANSIT THROUGH AREAS IN WHICH THE EXISTING ATTACK RESTRICTIONS WOULD BE INADEQUATE TO PREVENT ATTACK BY FRIENDLY FORCES.	
		SONOBUOY PATTERN REFERENCE POSITION	10	THE GEOGRAPHIC POSITION OF AN ACTUAL SONOBUOY, A SONAR DEVICE USED TO DETECT SUBMARINES WHICH, WHEN ACTIVATED, RELAYS INFORMATION BY RADIO.	
		LIMITING LINE OF APPROACH	11	A GEOGRAPHIC POSITION RELATIVE TO WHICH A PATTERN OF SONOBUOYS ARE POSITIONED. MAY BE THE POSITION OF AN ACTUAL SONOBUOY, OR JUST A GEOGRAPHIC POSITION IN THE WATER OR ON LAND.	
		AREA OF PROBABILITY (ASW)	12	MATHEMATICALLY CALCULATED LIMIT, RELATIVE TO THE FORCE, WITHIN WHICH AN ATTACKING SUBMARINE MUST BE IN ORDER THAT IT CAN REACH THE TORPEDO DANGER ZONE (TDZ). THE TDZ IS AN AREA WHICH THE SUBMARINE MUST ENTER IN ORDER TO BE WITHIN MAXIMUM EFFECTIVE TORPEDO FIRING RANGE.	
		FRIENDLY WEAPON DANGER AREA (FWDA)	13	A DEFINED AREA IN WHICH THE PRESENCE OF ONE OR MORE SUBMARINES OR SURFACE VESSELS IS SUSPECTED.	
		UNDEFINED	14 THROUGH 15	AN AREA IN WHICH FRIENDLY TORPEDOES POSE A THREAT TO FRIENDLY FORCES.	
		----- FOR ASW, 1 (8) -----			
		CHARTED WRECK	0	GEOGRAPHIC POSITION OF A KNOWN WRECK OR BOTTOMED FALSE SONAR TARGET.	

			FIELD CODING FOR J3.0I	(SHEET 16)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
379	002	POINT AMPLIFICATION -----	(CONTINUED)	
		BOTTOMED NONSUBMARINE	1	POSITION OF A FALSE SONAR TARGET CLASSIFIED AS NONSUBMARINE AND ASSUMED TO BE BOTTOMED.
		ASW STATION	2	POSITION FROM WHICH AN ASW UNIT IS CONDUCTING AN ACTIVE SONAR SEARCH.
		UNDEFINED	3 THROUGH 15	
		----- FOR UNDEFINED (9-15) -----		
		UNDEFINED	0 THROUGH 15	
797	004	MINUTE -----		THE MINUTE OF THE HOUR.
		0 THROUGH 59	0 THROUGH 59	IN ONE MINUTE INCREMENTS.
		ILLEGAL	60 THROUGH 62	
		NO STATEMENT	63	
792	001	HOURL ----		EXPRESSES TIME OF DAY OR A PERIOD OF TIME IN HOURS.
		0 HOUR	0	IN ONE HOUR INCREMENTS.
		1 THROUGH 23 HOURS	1 THROUGH 23	
		ILLEGAL	24 THROUGH 30	
		NO STATEMENT	31	

.....

WORD TITLE: REFERENCE POINT EXTENSION WORD

[illegible][illegible]

WORD DESCRIPTION

WORD NUMBER: J3.0E0

WORD TITLE: REFERENCE POINT EXTENSION WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	10
1768 001	TYPE OF BURST	2-	4 3	
756 003	SPARE	2-	4 3	
281 017	LATITUDE, 0.0103 MINUTE	5-	24 20	
1767 001	ESTIMATED YIELD (EST YLD)	25-	26 2	
756 002	SPARE (SP)	25-	26 2	
756 001	SPARE (SP)	27	1	
282 013	LONGITUDE, 0.0103 MINUTE	28-	48 21	
365 035	ALTITUDE, 100 FT 1	49-	58 10	
365 036	ALTITUDE, 100 FT 2	59-	68 10	
756 001	SPARE (SP)	69	1	

FIELD CODING FOR J3.0E0

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1768	001	TYPE OF BURST -----		EXPRESSES THE TYPE OF BURST FROM A NUCLEAR DETONATION, AND IS USED ONLY WITH POINT TYPE = 0, POINT AMP = 4.
		NO STATEMENT	0	
		UNKNOWN	1	
		AIR	2	
		SURFACE, GROUND	3	
		UNDERGROUND	4	
		SURFACE, WATER	5	
		UNDERWATER	6	
		SPACE	7	
281	017	LATITUDE, 0.0103 MINUTE -----		THE PRECISION IS APPROXIMATELY 63 FEET. IN 90/524,287 DEGREE INCREMENTS.
		0 DEGREES	0	
		+90/524,287 THROUGH +90 DEGREES NORTH	1 THROUGH 524287	
		NO STATEMENT	524288	
		-90 THROUGH -90/524,287 DEGREES SOUTH	524289 THROUGH 1048575	
1767	001	ESTIMATED YIELD -----		AN ESTIMATE OF THE YIELD OF A NUCLEAR DETONATION EXPRESSED IN MEGATONS, AND IS USED ONLY WITH POINT TYPE = 0, POINT AMP = 4.
		NO STATEMENT	0	
		SMALL	1	LESS THAN 0.1 MEGATON.
		MEDIUM	2	0.1 TO 1.0 MEGATON.
		LARGE	3	GREATER THAN 1.0 MEGATON.
282	013	LONGITUDE, 0.0103 MINUTE -----		THE PRECISION IS APPROXIMATELY 63 FEET. IN 180/1,048,575 DEGREE INCREMENTS.
		0 DEGREES	0	
		+180/1,048,575 THROUGH +180 DEGREES EAST	1 THROUGH 1048575	
		NO STATEMENT	1048576	
		-180 THROUGH -180/1,048,575 DEGREES WEST	1048577 THROUGH 2097151	
365	035	ALTITUDE, 100 FT 1 -----		EXPRESSES ALTITUDE AS MEASURED OUT- WARD FROM THE EARTH AS A POSITIVE

5.1-524

MIL-STD-6016B

FIELD CODING FOR J3.0E0 (SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
365	035	ALTITUDE, 100 FT 1 -----	(CONTINUED)	
		0 THROUGH 102,200 FEET	0 THROUGH 1022	QUANTITY ABOVE MEAN SEA LEVEL (MSL) IN FEET. THE BASE/MINIMUM ALTITUDE BOUNDARY OR A DESIGNATED ALTITUDE IN 100 FT. INCREMENTS.
		NO STATEMENT	1023	ALTITUDE IS NOT BEING REPORTED IN THIS MESSAGE.
365	036	ALTITUDE, 100 FT 2 -----		EXPRESSES ALTITUDE AS MEASURED OUT-WARD FROM THE EARTH AS A POSITIVE QUANTITY ABOVE MEAN SEA LEVEL (MSL) IN FEET.
		0 ALTITUDE	0	ILLEGAL.
		100 THROUGH 102,200 FEET	1 THROUGH 1022	AN UPPER/MAXIMUM ALTITUDE BOUNDARY IN 100 FT. INCREMENTS.
		NO STATEMENT	1023	AN UPPER/MAXIMUM ALTITUDE IS NOT BEING REPORTED IN THIS MESSAGE.

WORD MAP

WORD NUMBER: J3.0C1

WORD TITLE: REFERENCE POINT CONTINUATION WORD 1

24	23	22	21:	20	19	18	17	16	15	14	13	12	11	10	09	08	07:	06	05	04	03	02:	01	00:		
<---			:	DELTA LATITUDE, 0.0313 MINUTE 1														:	CONTINUATION WORD			:	WORD	:		
			:															:	LABEL			:	FORMAT	:		
			:															:				:		:		
			:	14														:	5			:	2	:		
49	48	47	46	45	44	43	42	41	40	39	38:	37	36:	35:	34	33	32	31	30	29	28	27	26	25		
DELTA LATITUDE, 0.0313 MINUTE 2												:	SP	:	END:	DELTA LONGITUDE, 0.0313 MINUTE 1										
												:		:	PT1:											
												:		:												
14					:	2	:	1	:	14																
			:	69	68	67:	66:	65	64	63	62	61	60	59	58	57	56	55	54	53	52:	51	50			
			:	SPARE		:	END:															:				
			:			:	PT2:	DELTA LONGITUDE, 0.0313 MINUTE 2														:	-->			
			:			:																:				
			:	3		:	1	:	14										:							

WORD DESCRIPTION

WORD NUMBER: J3.0C1

WORD TITLE: REFERENCE POINT CONTINUATION WORD 1

REFERENCE DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	00001
289 003	DELTA LATITUDE, 0.0313 MINUTE	7-	20 14	
	1			
290 003	DELTA LONGITUDE, 0.0313 MINUTE	21-	34 14	SAME CODING AS FOR BITS 7-20.
	1			
1645 002	END POINT, 1 (END PT1)	35	1	
756 002	SPARE (SP)	36-	37 2	
289 004	DELTA LATITUDE, 0.0313 MINUTE	38-	51 14	SAME CODING AS FOR BITS 7-20.
	2			
290 004	DELTA LONGITUDE, 0.0313 MINUTE	52-	65 14	SAME CODING AS FOR BITS 7-20.
	2			
1645 003	END POINT, 2 (END PT2)	66	1	
756 003	SPARE	67-	69 3	

FIELD CODING FOR J3.0C1

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
289	003	DELTA LATITUDE, 0.0313 MINUTE 1 -----		SPECIFIES THE POSITION OF A POINT AS AN OFFSET IN UNITS OF MINUTES OF ARC FROM A DESIGNATED REFERENCE POINT. IN 0.0313 MINUTE INCREMENTS WITH TWOS COMPLEMENT CODING.
		0 DIFFERENCE	0	
		+0.0313 THROUGH	1 THROUGH 8191	
		+256.3783 MINUTES		
		NO STATEMENT	8192	
		-256.3783 THROUGH	8193 THROUGH 16383	
		-0.0313 MINUTES		
1645	002	END POINT, 1 -----		THIS FIELD IS USED TO INDICATE THAT THE ASSOCIATED POSITION DESCRIBED IN THE MESSAGE IS AN END POINT OF A SEGMENTED LINE OR IS THE LAST POINT TRANSMITTED TO FORM A MULTI-SIDED AREA.
		NO STATEMENT	0	
		END POINT	1	THE ASSOCIATED LATITUDE/LONGITUDE OR DELTA LATITUDE/DELTA LONGITUDE FIELDS DESCRIBE A POINT THAT IS THE END POINT OF A SEGMENTED LINE OR IS COINCIDENT WITH THE INITIAL POINT TRANSMITTED IN A PREVIOUS MESSAGE TO FORM A MULTI-SIDED AREA THAT IS NOT A SQUARE OR A RECTANGLE. SQUARES AND RECTANGLES ARE DESCRIBED USING THE SQUARE/ CIRCLE SWITCH, AREA MAJOR AXIS, AREA MINOR AXIS AND AXIS ORIENTATION FIELDS.
1645	003	END POINT, 2 -----		THIS FIELD IS USED TO INDICATE THAT THE ASSOCIATED POSITION DESCRIBED IN THE MESSAGE IS AN END POINT OF A SEGMENTED LINE OR IS THE LAST POINT TRANSMITTED TO FORM A MULTI-SIDED AREA.
		NO STATEMENT	0	
		END POINT	1	THE ASSOCIATED LATITUDE/LONGITUDE OR DELTA LATITUDE/DELTA LONGITUDE FIELDS DESCRIBE A POINT THAT IS THE END POINT OF A SEGMENTED LINE

5.1-528

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1645	003	END POINT, 2 -----	(CONTINUED)	

OR IS COINCIDENT WITH THE INITIAL
POINT TRANSMITTED IN A PREVIOUS
MESSAGE TO FORM A MULTI-SIDED AREA
THAT IS NOT A SQUARE OR A
RECTANGLE. SQUARES AND RECTANGLES
ARE DESCRIBED USING THE SQUARE/
CIRCLE SWITCH, AREA MAJOR AXIS,
AREA MINOR AXIS AND AXIS
ORIENTATION FIELDS.

.....

WORD TITLE: REFERENCE POINT CONTINUATION WORD 2

24	23	22	21	20	19:	18:	17	16	15	14	13	12	11	10	09	08	07:	06	05	04	03	02:	01	00:	
					:	:	SPEED										:	CONTINUATION WORD					:	WORD	:
<---					:	SP											:	LABEL					:	FORMAT	:
					:	1	11										:	5					:	2	:

:	49		48:	47:	46	45	44	43	42	41	40	39	38:	37	36	35	34	33	32	31	30	29	28	27	26	25				
:	SQUARE/:	:													:															
:	CIRCLE :	SP :	COURSE												:	TRACK NUMBER, RELATED														
:	SWITCH :	:													:															
:	2	:	1	:	9												:	19												

:	69	68	67	66	65	64	:	63	62	61	60	59	58	:	57	56	55	54	53	52	51	50	:
:	AREA MINOR AXIS						:	AREA MAJOR AXIS						:	AXIS ORIENTATION						:		
:							:							:							:		
:	6						:	6						:	8						:		

WORD DESCRIPTION

WORD NUMBER: J3.0C2

WORD TITLE: REFERENCE POINT CONTINUATION WORD 2

REFERENCE			BIT	#	
DFI/DUI	DATA FIELD	DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD	FORMAT	0-	1 2	01
1551 001	CONTINUATION	WORD LABEL	2-	6 5	00010
367 018	SPEED		7-	17 11	
756 001	SPARE	(SP)	18	1	
769 007	TRACK	NUMBER, RELATED	19-	37 19	
371 015	COURSE		38-	46 9	
756 001	SPARE	(SP)	47	1	
351 009	SQUARE/CIRCLE	SWITCH (S/C SW)	48-	49 2	
1806 001	AXIS	ORIENTATION	50-	57 8	
419 003	AREA	MAJOR AXIS	58-	63 6	
419 004	AREA	MINOR AXIS	64-	69 6	

FIELD CODING FOR J3.0C2

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
367	018	SPEED ----- 0 THROUGH 4092 DATA MILES PER HOUR NO STATEMENT	0 THROUGH 2046 2047	THE RATE OF CHANGE OF POSITION. EXPRESSES GROUND SPEED IN 2 DATA MILES PER HOUR INCREMENTS.
769	007	TRACK NUMBER, RELATED -----		THE TN OF A JU OR POINT THAT IS RELATED TO THE REFERENCE TN IN THE MESSAGE. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE- BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANNN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6
00111	7
01000	A
01001	B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	007	TRACK NUMBER, RELATED -----	(CONTINUED)	
				01010 C
				01011 D
				01100 E
				01101 F
				01110 G
				01111 H
				10000 J
				10001 K
				10010 L
				10011 M
				10100 N
				10101 P
				10110 Q
				10111 R
				11000 S
				11001 T
				11010 U
				11011 V
				11100 W
				11101 X
				11110 Y
				11111 Z
		00000	0	NO STATEMENT.
		00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		00077	63	ILLEGAL.
		00100-00175	64 THROUGH 125	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		00176	126	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		00177	127	COLLECTIVE ADDRESS.
		00200-07776	128 THROUGH 4094	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		07777	4095	ILLEGAL.
		0A000-0Z777	4096 THROUGH 16383	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		10000-17777	16384 THROUGH 20479	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	007	TRACK NUMBER, RELATED -----	(CONTINUED)	
		1A000-1Z777	20480 THROUGH 32767	C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS. ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		20000-27777	32768 THROUGH 36863	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.

FIELD CODING FOR J3.0C2

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	007	TRACK NUMBER, RELATED ----- 60000-67777	(CONTINUED) 98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		70000-77776	114688 THROUGH 118782	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
371	015	COURSE ----- 0 THROUGH 359 DEGREES ILLEGAL NO STATEMENT	0 THROUGH 359 360 THROUGH 510 511	INDICATES THE DIRECTION OF TRAVEL OF AN OBJECT IN DEGREES WITH RESPECT TO TRUE NORTH. IN 1 DEGREE INCREMENTS.
351	009	SQUARE/CIRCLE SWITCH ----- NO STATEMENT SQUARE/RECTANGULAR CIRCULAR/ELLIPTICAL UNDEFINED	0 1 2 3	USED IN CONJUNCTION WITH THE LATITUDE, LONGITUDE, AREA MAJOR AXIS, AREA MINOR AXIS, AND AXIS ORIENTATION FIELDS TO DESCRIBE AN AREA. IF AREA MAJOR AND AREA MINOR AXES ARE EQUAL THE AREA DESCRIBED IS A SQUARE. IF THE AXES ARE NOT EQUAL THE AREA DESCRIBED IS A RECTANGLE. IF AREA MAJOR AND AREA MINOR AXES ARE EQUAL THE AREA DESCRIBED IS A CIRCLE. IF THE AXES ARE NOT EQUAL THE AREA IS AN ELLIPSE.

5.1-535

MIL-STD-6016B

FIELD CODING FOR J3.0C2

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1806	001	AXIS ORIENTATION ----- 0 THROUGH 179 DEGREES ILLEGAL NO STATEMENT	0 THROUGH 179 180 THROUGH 254 255	THE AXIS ORIENTATION IS THE OFFSET FROM TRUE NORTH EXPRESSED IN ONE DEGREE INCREMENTS FROM ZERO TO 179 AND IS USED TO ORIENT THE AREA MA- JOR AXIS OF A CIRCLE, ELLIPSE, SQUARE, OR RECTANGLE. IN ONE DEGREE INCREMENTS.
419	003	AREA MAJOR AXIS ----- 0 THROUGH 244 DATA MILES 248 DATA MILES OR MORE NO STATEMENT	0 THROUGH 61 62 63	THIS FIELD IS USED IN CONJUNCTION WITH THE SQUARE/CIRCLE SWITCH, AREA MINOR AXIS, AXIS ORIENTATION, LATITUDE AND LONGITUDE TO DESCRIBE THE AREA OF A CIRCLE, ELLIPSE, SQUARE OR RECTANGLE. THE LENGTH EXPRESSED IN THIS FIELD IS DOUBLED AND CENTERED ON THE POSITION DE- SCRIBED BY THE LATITUDE AND LONGITUDE. IN FOUR DATA MILE INCREMENTS.
419	004	AREA MINOR AXIS ----- 0 THROUGH 244 DATA MILES 248 DATA MILES OR MORE NO STATEMENT	0 THROUGH 61 62 63	THIS FIELD IS USED IN CONJUNCTION WITH THE SQUARE/CIRCLE SWITCH, AREA MAJOR AXIS, AXIS ORIENTATION, LATITUDE AND LONGITUDE TO DESCRIBE THE AREA OF A CIRCLE, ELLIPSE, SQUARE OR RECTANGLE. THE AREA MINOR AXIS IS ALWAYS ORIENTED AT 90 DEGREES TO THE AREA MAJOR AXIS. THE LENGTH EXPRESSED IN THIS FIELD IS DOUBLED AND CENTERED ON THE POSITION DESCRIBED BY THE LATITUDE AND LONGITUDE. IN FOUR DATA MILE INCREMENTS.

5.1-536

MIL-STD-6016B

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD TITLE: REFERENCE POINT CONTINUATION WORD 3

24:	23	22	21	20:	19	18	17	16:	15	14:	13	12	11	10	09	08	07:	06	05	04	03	02:	01	00:
<---	:	SONOBUOY	:	TYPE	:	DEPTH,	:	TRANSDUCER	:	DEP IND:	:	CHANNEL	:	NUMBER,	:	SONOBUOY	:	RF:	:	CONTINUATION WORD	:	WORD	:	:
:	:	:	:	:	:	(SONOBUOY)	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
:	:	4	:	:	:	4	:	:	2	:	:	:	7	:	:	:	:	:	5	:	:	2	:	:

49	48	47	46	45	44	43	42:	41	40	39	38	37	36	35	34	33:	32	31	30	29	28:	27	26	25
SONOBUOY ROW SPACING							:	SONOBUOY SPACING							:	SONOBUOY TYPE NUMBER				:	SONOBUOY PATTERN			
9							:	9							:	5				:	4			

: 69:	68	67	66	65	64	63	62	61	60:	59	58	57	56	55	54	53	52	51:	50
:HLD:									:									:	
:CON:					BEARING, ASW PLOT				:		SONOBUOY PATTERN RADIUS							:---	>
:	:								:									:	
: 1 :					9				:					9				:	

WORD DESCRIPTION

WORD NUMBER: J3.0C3

WORD TITLE: REFERENCE POINT CONTINUATION WORD 3

REFERENCE			BIT	#	
DFI/DUI	DATA FIELD	DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD	FORMAT	0-	1 2	01
1551 001	CONTINUATION	WORD LABEL	2-	6 5	00011
420 008	CHANNEL	NUMBER, SONOBUOY RF	7-	13 7	
366 012	DEPTH	INDICATOR (SONOBUOY)	14-	15 2	
		(DEP IND)			
366 013	DEPTH,	TRANSDUCER (SONOBUOY)	16-	19 4	
349 001	SONOBUOY	TYPE	20-	23 4	
350 001	SONOBUOY	PATTERN	24-	27 4	
350 002	SONOBUOY	TYPE NUMBER	28-	32 5	
350 003	SONOBUOY	SPACING	33-	41 9	
350 004	SONOBUOY	ROW SPACING	42-	50 9	
350 005	SONOBUOY	PATTERN RADIUS	51-	59 9	
372 023	BEARING,	ASW PLOT	60-	68 9	
356 001	HOLDING	CONTACT (HLD CON)	69	1	

FIELD CODING FOR J3.0C3

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
420	008	CHANNEL NUMBER, SONOBUOY RF -----		IDENTIFIES THE RADIO FREQUENCY CHANNEL OF THE SONOBUOY. INTERPRETED ONLY WHEN THE ASW POINT AMPLIFY IN THE J3.0I IS SET TO 9 (SONOBUOY).
		NO STATEMENT	0	
		RF CHANNEL	1 THROUGH 99	
		UNDEFINED	100 THROUGH 127	
366	012	DEPTH INDICATOR (SONOBUOY) -----		EXPRESSES DEPTH OF SONOBUOY TRANSDUCER IN TERMS RELATIVE TO MSL OF SHALLOW, MEDIUM, OR DEEP WHEN DEPTH, TRANSDUCER IS SET TO NO STATEMENT. EXPRESSES A DEPTH MULTIPLIER WHEN DEPTH, TRANSDUCER IS VALUE 1 THRU 9. INTERPRETED ONLY WHEN THE ASW POINT AMPLIFY IN THE J3.0I IS SET TO 9 (SONOBUOY) OR 10 (PATTERN).
		NO STATEMENT	0	
		SHALLOW (DEPTH X 3)	1	
		MEDIUM (DEPTH X 30)	2	
		DEEP (DEPTH X 300)	3	
366	013	DEPTH, TRANSDUCER (SONOBUOY) -----		WHEN MULTIPLIED BY DEPTH INDICATOR (SONOBUOY), EXPRESSES DEPTH OF SONOBUOY TRANSDUCER AS MEASURED DOWNWARD FROM MSL AS A POSITIVE QUANTITY IN METERS. INTERPRETED ONLY WHEN DEPTH INDICATOR (SONOBUOY) IS NOT SET TO ZERO.
		NO STATEMENT	0	
		DEPTH (METERS X DEPTH INDICATOR)	1 THROUGH 9	
		UNDEFINED	10 THROUGH 15	
349	001	SONOBUOY TYPE -----		IDENTIFIES THE SONOBUOY TYPE. INTER- PRETED ONLY WHEN ASW POINT AMPLIFY IN J3.0I IS 9 (SONOBUOY POSITION) OR 10 (SONOBUOY PATTERN REFERENCE POSITION).
		NO STATEMENT	0	
		BT	1	BATHYTHERMOGRAPH.
		LOFAR	2	LOW FREQUENCY ANALYSIS AND RECORDING.

5.1-540

MIL-STD-6016B

FIELD CODING FOR J3.0C3

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
349	001	SONOBUOY TYPE -----	(CONTINUED)	
		RO	3	RANGE ONLY.
		DIFAR	4	DIRECTIONAL LOFAR.
		VLA	5	VERTICAL LINE ARRAY.
		CAMBS	6	COMMAND ACTIVATED MULTIBEAM SONOBUOY.
		BARRA	7	
		DISUSED	8	
		DISUSED	9	
		VLAD	10	VERTICAL LINE ARRAY DIFAR.
		DISUSED	11	
		WIDE BAND LOFAR	12	
		DICASS	13	DIRECTIONAL COMMAND ACTIVATED SONOBUOY SYSTEM.
		ADAR	14	AIR DEPLOYABLE ACTIVE RECEIVER.
		NUAMP	15	NAVAL UNDERWATER ACTIVE MULTIPLE PING.
350	001	SONOBUOY PATTERN -----		REPORTS THE GENERIC NAME FOR SONOBUOY PATTERN. INTERPRETED ONLY WHEN ASW POINT AMPLIFY IN THIS MESSAGE IS 10 (PATTERN).
		NO STATEMENT	0	
		BARRIER	1	
		WEDGE	2	
		CIRCLE (NO CENTER BUOY)	3	
		CIRCLE (CENTER BUOY)	4	
		BRUSHTAC	5	
		DISTRIBUTIVE	6	
		UNDEFINED	7 THROUGH 15	
350	002	SONOBUOY TYPE NUMBER -----		INDICATES TYPE NUMBER OF SONOBUOYS IN THE SONOBUOY PATTERN. INTERPRETED ONLY WHEN ASW POINT AMPLIFY IN THIS MESSAGE IS 10 (PATTERN).
		NO STATEMENT NUMBER	0 1 THROUGH 31	
350	003	SONOBUOY SPACING -----		REPORTS THE DISTANCE BETWEEN EACH SONOBUOY IN THE SONOBUOY PATTERN. INTERPRETED ONLY WHEN ASW POINT AMPLIFY IN THIS MESSAGE IS 10 (PATTERN).

5.1-541

MIL-STD-6016B

FIELD CODING FOR J3.0C3

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
350	003	SONOBUOY SPACING ----- NO STATEMENT 125 THROUGH 63,875 YARDS	(CONTINUED) 0 1 THROUGH 511	
350	004	SONOBUOY ROW SPACING ----- NO STATEMENT 125 THROUGH 63,875 YARDS	 0 1 THROUGH 511	INDICATES THE DISTANCE BETWEEN EACH ROW IN THE SONOBUOY PATTERN. INTERPRETED ONLY WHEN ASW POINT AMPLIFY IN THIS MESSAGE IS 10 (PATTERN).
350	005	SONOBUOY PATTERN RADIUS ----- NO STATEMENT 125 THROUGH 63,875 YARDS	 0 1 THROUGH 511	REPORTS THE DISTANCE FROM THE CENTER TO THE OUTER EDGE OF A CIRCULAR PATTERN IN INCREMENTS OF 125 YARDS. INTERPRETED ONLY WHEN ASW POINT AMPLIFY IN THIS MESSAGE IS 10 (PATTERN).
372	023	BEARING, ASW PLOT ----- 0 THROUGH 359 DEGREES ILLEGAL NO STATEMENT	 0 THROUGH 359 360 THROUGH 510 511	BEARING, ASW PLOT IS REFERENCED TO TRUE NORTH AND IS INTERPRETED AS FOLLOWS: A. FOR ASW POINT AMPLIFY IN J3.0I IS 10 (PATTERN): BEARING OF LINE OF SONOBUOYS. B. FOR ASW POINT AMPLIFY IN J3.0I IS 11 (LIMITING LINE OF APPROACH): BEARING OF LINE. IN 1 DEGREE INCREMENTS
356	001	HOLDING CONTACT ----- NO STATEMENT SONOBUOY/PATTERN HOLDING CONTACT	 0 1	EXPRESSES THE PRESENCE OF AN ACOUSTIC DETECTION BY A SONOBUOY OR PATTERN OF SONOBUOYS. INTERPRETED ONLY WHEN ASW POINT AMPLIFY IN THIS MESSAGE IS 9 (SONOBUOY) OR 10 (PATTERN).

5.1-542

MIL-STD-6016B

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: REFERENCE POINT CONTINUATION WORD 4

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30:	29	28	27	26:	25					
																				:SONOBUOY TYPE, :									
<---																				:	1				:	----			
																				:					:				
																				:	4				:				

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50
:																				
:																				
:											SPARE									
:																				
:											40									

WORD DESCRIPTION

WORD NUMBER: J3.0C4

WORD TITLE: REFERENCE POINT CONTINUATION WORD 4

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	00100
769 040	TRACK NUMBER, RELATED 1	7-	25 19	
349 002	SONOBUOY TYPE, 1	26-	29 4	
756 040	SPARE	30-	69 40	

FIELD CODING FOR J3.0C4

(SHEET 1)

DFI DUI DUI/DI NAME
769 040 TRACK NUMBER, RELATED 1

DI BIT CODE

DUI/DI EXPLANATION

THE TN OF A JU OR POINT THAT IS
RELATED TO THE REFERENCE TN IN
THE MESSAGE.
THE NINETEEN BITS OF THIS TN ARE
DIVIDED INTO FIVE GROUPS
CONSISTING OF TWO FIVE-BIT GROUPS
AND THREE THREE-BIT GROUPS. EACH
FIVE-BIT GROUP REPRESENTS AN
ALPHANUMERIC CHARACTER OF EITHER
AN ALPHA CHARACTER OF A THROUGH Z
(EXCLUDING THE ALPHA CHARACTERS I
AND O) OR A NUMERIC CHARACTER OF
ZERO THROUGH SEVEN. EACH THREE-
BIT GROUP REPRESENTS A NUMERIC
CHARACTER OF ZERO THROUGH SEVEN.
THEREFORE, ANY TN CAN BE
REPRESENTED BY AANNN WHERE A IS AN
ALPHANUMERIC CHARACTER CODED WITH
FIVE BITS AND N IS A NUMERIC
CHARACTER CODED WITH THREE BITS.
CODING FOR A FIVE BIT ALPHANUMERIC
CHARACTER IS SHOWN BELOW. CODING
FOR A THREE BIT NUMERIC CHARACTER
IS EXACTLY THE SAME AS ZERO
THROUGH SEVEN OF THE FIVE BIT
ALPHANUMERIC CHARACTER WITH THE
FIRST TWO LEADING ZEROES DELETED.

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6
00111	7
01000	A
01001	B
01010	C
01011	D
01100	E
01101	F
01110	G
01111	H

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	040	TRACK NUMBER, RELATED 1 -----	(CONTINUED)	
				10000 J
				10001 K
				10010 L
				10011 M
				10100 N
				10101 P
				10110 Q
				10111 R
				11000 S
				11001 T
				11010 U
				11011 V
				11100 W
				11101 X
				11110 Y
				11111 Z
		00000	0	NO STATEMENT.
		00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU). ILLEGAL.
		00077	63	
		00100-00175	64 THROUGH 125	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU). RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		00176	126	COLLECTIVE ADDRESS.
		00177	127	
		00200-07776	128 THROUGH 4094	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		07777	4095	ILLEGAL.
		0A000-0Z777	4096 THROUGH 16383	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		10000-17777	16384 THROUGH 20479	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND

FIELD CODING FOR J3.0C4

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	040	TRACK NUMBER, RELATED 1 -----	(CONTINUED)	
		20000-27777	32768 THROUGH 36863	REFERENCE POINTS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE

5.1-548

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	040	TRACK NUMBER, RELATED 1 -----	(CONTINUED)	
				USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		70000-77776	114688 THROUGH 118782	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
349	002	SONOBUOY TYPE, 1 -----		IDENTIFIES THE SONOBUOY TYPE. INTERPRETED ONLY WHEN ASW POINT AMPLIFY IN J3.0I IS 9 (SONOBUOY POSITION) OR 10. (SONOBUOY PATTERN REFERENCE POSITION).
		NO STATEMENT	0	
		HIDAR	1	HIGH INSTANTANEOUS DYNAMIC RANGE DIFAR.
		SSQ110	2	ACTIVE LOW FREQUENCY EXPLOSIVE ACOUSTIC.
		CAMBS6	3	COMMAND ACTIVATED MULTIBEAM SONOBUOY VERSION 6.
		ALFEA	4	ACTIVE LOW FREQUENCY ELECTRO ACOUSTIC.
		SSQ911	5	UK ACTIVE LOW FREQUENCY EXPLOSIVE ACOUSTIC.
		SSQ981D	6	PROGRAMMABLE BARRA.
		UNDEFINED	7 THROUGH 15	UNDEFINED.
756	040	SPARE -----		

5.1-549

MIL-STD-6016B

WORD TITLE: REFERENCE POINT CONTINUATION WORD 5

49	48:	47	46	45	44	43	42:	41	40	39	38	37	36	35:	34	33	32	31	30	29	28:	27	26	25
<---	:				SECOND		:				AREA MINOR AXIS, 4		:				AREA MAJOR AXIS, 4		:				---	>
	:				6		:				7		:				7		:					

5.1-550

MIL-STD-6016B

WORD DESCRIPTION

WORD NUMBER: J3.0C5

WORD TITLE: REFERENCE POINT CONTINUATION WORD 5

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BIT #	RESOLUTION, CODING, ETC
				BITS	
1550	001	WORD FORMAT	0-	1 2	01
1551	001	CONTINUATION WORD LABEL	2-	6 5	00101
275	004	ENVIRONMENT/CATEGORY (ENV/CAT)	7-	9 3	
601	001	AIR AMPLIFICATION	10-	14 5	
601	002	SURFACE (MARITIME) AMPLIFICATION	10-	14 5	
601	003	SUBSURFACE (MARITIME) AMPLIFICATION	10-	14 5	
601	004	LAND (GROUND) AMPLIFICATION	10-	14 5	
601	005	SPACE AMPLIFICATION	10-	14 5	
756	005	SPARE	10-	14 5	
358	002	AMPLIFICATION CONFIDENCE (AMP CONF)	15-	17 3	
351	009	SQUARE/CIRCLE SWITCH (S/C SW)	18-	19 2	
1806	001	AXIS ORIENTATION	20-	27 8	
419	001	AREA MAJOR AXIS, 4	28-	34 7	
419	002	AREA MINOR AXIS, 4	35-	41 7	
380	001	SECOND	42-	47 6	
769	044	TRACK NUMBER, RELATED 2	48-	66 19	
1107	004	CONNECT/DISCONNECT (C/D)	67	1	
756	002	SPARE (SP)	68-	69 2	

FIELD CODING FOR J3.0C5

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
275	004	ENVIRONMENT/CATEGORY -----		IDENTIFIES THE ENVIRONMENT/CATEGORY OF A JTIDS/MIDS UNIT OR TRACK.
		NO STATEMENT/UNKNOWN	0	
		SPACE	1	
		AIR	2	
		SURFACE (MARITIME)	3	
		SUBSURFACE (MARITIME)	4	
		LAND (GROUND)	5	
		UNDEFINED	6 THROUGH 7	
601	001	AIR AMPLIFICATION -----		INDICATES ADDITIONAL INFORMATION ON THE AIR ENVIRONMENT/CATEGORY BEING REPORTED IN THE MESSAGE.
		NO STATEMENT	0	
		UNDEFINED	1 THROUGH 31	
601	002	SURFACE (MARITIME) AMPLIFICATION -----		INDICATES ADDITIONAL INFORMATION ON THE SURFACE (MARITIME) ENVIRONMENT/ CATEGORY BEING REPORTED IN THE MESSAGE.
		NO STATEMENT	0	
		UNDEFINED	1 THROUGH 31	
601	003	SUBSURFACE (MARITIME) AMPLIFICATION -----		INDICATES ADDITIONAL INFORMATION ON THE SUBSURFACE (MARITIME) ENVIRONMENT/CATEGORY BEING REPORTED IN THE MESSAGE.
		NO STATEMENT	0	
		MK-50	1	
		MK-46 ADVANCED SHALLOW	2	
		UNDEFINED	3 THROUGH 31	
601	004	LAND (GROUND) AMPLIFICATION -----		INDICATES ADDITIONAL INFORMATION ON THE LAND (GROUND) ENVIRONMENT/ CATEGORY BEING REPORTED IN THE MESSAGE.
		NO STATEMENT	0	
		UNDEFINED	1 THROUGH 31	
601	005	SPACE AMPLIFICATION -----		INDICATES ADDITIONAL INFORMATION ON THE SPACE ENVIRONMENT/CATEGORY BEING REPORTED IN THE MESSAGE.
		NO STATEMENT	0	
		UNITARY HIGH EXPLOSIVE	1	SINGLE CHARGE HIGH EXPLOSIVE
		WARHEAD		WARHEAD.

5.1-552

MIL-STD-6016B

FIELD CODING FOR J3.0C5

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
601	005	SPACE AMPLIFICATION -----	(CONTINUED)	
		NUCLEAR WARHEAD	2	
		BULK CHEMICAL WARHEAD	3	SINGLE WARHEAD (CHEMICAL).
		BULK BIOLOGICAL WARHEAD	4	SINGLE WARHEAD (BIOLOGICAL).
		FUEL-AIR EXPLOSIVE WARHEAD	5	
		DEBRIS	6	
		WARHEAD	7	
		PENETRATION AID	8	DECOY, CHAFF, ETC.
		HIGH EXPLOSIVE	9	MULTIPLE HIGH EXPLOSIVE BOMBLETS DISPERSED IN FLIGHT.
		SUBMUNITION WARHEAD	10	MULTIPLE CHEMICAL BOMBLETS DISPERSED IN FLIGHT.
		CHEMICAL SUBMUNITION WARHEAD	11	MULTIPLE BIOLOGICAL BOMBLETS DISPERSED IN FLIGHT.
		BIOLOGICAL SUBMUNITION WARHEAD	12 THROUGH 30	
		UNDEFINED	31	
		RESET TO NO STATEMENT		
358	002	AMPLIFICATION CONFIDENCE -----		A MEASURE OF THE CONFIDENCE IN THE VALIDITY OR CERTAINTY OF THE AMPLIFICATION INFORMATION PROVIDED IN THE AMPLIFICATION FIELD OF THE MESSAGE. LARGER VALUES REPRESENT A GREATER CONFIDENCE LEVEL.
		NO STATEMENT	0	
		0-THROUGH 33%	1	
		34- THROUGH 66%	2	
		67- THROUGH 90%	3	
		91- THROUGH 97%	4	
		GREATER THAN OR EQUAL TO 98%	5	
		UNDEFINED	6 THROUGH 7	
351	009	SQUARE/CIRCLE SWITCH -----		USED IN CONJUNCTION WITH THE LATITUDE, LONGITUDE, AREA MAJOR AXIS, AREA MINOR AXIS, AND AXIS ORIENTATION FIELDS TO DESCRIBE AN AREA.
		NO STATEMENT	0	
		SQUARE/RECTANGULAR	1	IF AREA MAJOR AND AREA MINOR AXES ARE EQUAL THE AREA DESCRIBED IS A SQUARE. IF THE AXES ARE NOT EQUAL THE AREA DESCRIBED IS A RECTANGLE.
		CIRCULAR/ELLIPTICAL	2	IF AREA MAJOR AND AREA MINOR AXES

5.1-553

MIL-STD-6016B

FIELD CODING FOR J3.0C5

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
351	009	SQUARE/CIRCLE SWITCH -----	(CONTINUED)	
		UNDEFINED	3	ARE EQUAL THE AREA DESCRIBED IS A CIRCLE. IF THE AXES ARE NOT EQUAL THE AREA IS AN ELLIPSE.
1806	001	AXIS ORIENTATION -----		THE AXIS ORIENTATION IS THE OFFSET FROM TRUE NORTH EXPRESSED IN ONE DEGREE INCREMENTS FROM ZERO TO 179 AND IS USED TO ORIENT THE AREA MAJOR AXIS OF A CIRCLE, ELLIPSE, SQUARE, OR RECTANGLE.
		0 THROUGH 179 DEGREES ILLEGAL NO STATEMENT	0 THROUGH 179 180 THROUGH 254 255	IN ONE DEGREE INCREMENTS.
419	001	AREA MAJOR AXIS, 4 -----		THIS FIELD IS USED IN CONJUNCTION WITH THE SQUARE/CIRCLE SWITCH, AREA MINOR AXIS, 4, AXIS ORIENTATION, LATITUDE, AND LONGITUDE TO DESCRIBE THE AREA OF A CIRCLE, ELLIPSE, SQUARE, OR RECTANGLE; OR THIS FIELD IS USED BY ITSELF TO DESCRIBE THE WIDTH OF A CORRIDOR OR A LOW LEVEL TRANSIT ROUTE CENTERED ON THE LINE. FOR OTHER THAN A CORRIDOR OR LOW LEVEL TRANSIT ROUTE, THE LENGTH EXPRESSED IN THIS FIELD IS DOUBLED AND CENTERED ON THE POSITION DESCRIBED BY THE LATITUDE AND LONGITUDE. THE INCREMENTS FOR THIS FIELD ARE EXPONENTIAL AND COMPUTED BY USING THE FOLLOWING FORMULA: LENGTH IN DATA MILES EQUALS 1.11 TO THE (BIT CODE - 64) POWER. EXAMPLE: FOR DI VALUE 5, LENGTH = 1.11 TO THE (5-64) POWER.
		NO STATEMENT	0	
		0.00140 DATA MILES	1	APPROXIMATELY 8 FEET.
		0.00155 DATA MILES	2	APPROXIMATELY 9 FEET.
		0.00172 DATA MILES	3	APPROXIMATELY 10 FEET.
		0.00191 DATA MILES	4	APPROXIMATELY 11 FEET.

FIELD CODING FOR J3.0C5

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
419	001	AREA MAJOR AXIS, 4	(CONTINUED)	

		0.00212 DATA MILES	5	APPROXIMATELY 13 FEET.
		0.00235 DATA MILES	6	APPROXIMATELY 14 FEET.
		0.00261 DATA MILES	7	APPROXIMATELY 16 FEET.
		0.00290 DATA MILES	8	APPROXIMATELY 17 FEET.
		0.00322 DATA MILES	9	APPROXIMATELY 19 FEET.
		0.00357 DATA MILES	10	APPROXIMATELY 21 FEET.
		0.00396 DATA MILES	11	APPROXIMATELY 24 FEET.
		0.00440 DATA MILES	12	APPROXIMATELY 26 FEET.
		0.00488 DATA MILES	13	APPROXIMATELY 29 FEET.
		0.00542 DATA MILES	14	APPROXIMATELY 33 FEET.
		0.00601 DATA MILES	15	APPROXIMATELY 36 FEET.
		0.00668 DATA MILES	16	APPROXIMATELY 40 FEET.
		0.00741 DATA MILES	17	APPROXIMATELY 45 FEET.
		0.00823 DATA MILES	18	APPROXIMATELY 49 FEET.
		0.00913 DATA MILES	19	APPROXIMATELY 55 FEET.
		0.01013 DATA MILES	20	APPROXIMATELY 61 FEET.
		0.01125 DATA MILES	21	APPROXIMATELY 68 FEET.
		0.01249 DATA MILES	22	APPROXIMATELY 75 FEET.
		0.01386 DATA MILES	23	APPROXIMATELY 83 FEET.
		0.01538 DATA MILES	24	APPROXIMATELY 92 FEET.
		0.01708 DATA MILES	25	APPROXIMATELY 103 FEET.
		0.01896 DATA MILES	26	APPROXIMATELY 114 FEET.
		0.02104 DATA MILES	27	APPROXIMATELY 126 FEET.
		0.02335 DATA MILES	28	APPROXIMATELY 140 FEET.
		0.02592 DATA MILES	29	APPROXIMATELY 156 FEET.
		0.02878 DATA MILES	30	APPROXIMATELY 173 FEET.
		0.03194 DATA MILES	31	APPROXIMATELY 192 FEET.
		0.03545 DATA MILES	32	APPROXIMATELY 213 FEET.
		0.03935 DATA MILES	33	APPROXIMATELY 236 FEET.
		0.04368 DATA MILES	34	APPROXIMATELY 262 FEET.
		0.04849 DATA MILES	35	APPROXIMATELY 291 FEET.
		0.05382 DATA MILES	36	APPROXIMATELY 323 FEET.
		0.05974 DATA MILES	37	APPROXIMATELY 359 FEET.
		0.06631 DATA MILES	38	APPROXIMATELY 398 FEET.
		0.07361 DATA MILES	39	APPROXIMATELY 442 FEET.
		0.08170 DATA MILES	40	APPROXIMATELY 490 FEET.
		0.09069 DATA MILES	41	APPROXIMATELY 544 FEET.
		0.10067 DATA MILES	42	APPROXIMATELY 604 FEET.
		0.11174 DATA MILES	43	APPROXIMATELY 671 FEET.
		0.12403 DATA MILES	44	APPROXIMATELY 744 FEET.
		0.13768 DATA MILES	45	APPROXIMATELY 826 FEET.
		0.15282 DATA MILES	46	APPROXIMATELY 917 FEET.
		0.16963 DATA MILES	47	APPROXIMATELY 1018 FEET.

5.1-555

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
419	001	AREA MAJOR AXIS, 4	(CONTINUED)	
		0.18829 DATA MILES	48	APPROXIMATELY 1130 FEET.
		0.20900 DATA MILES	49	APPROXIMATELY 1254 FEET.
		0.23199 DATA MILES	50	APPROXIMATELY 1392 FEET.
		0.25751 DATA MILES	51	APPROXIMATELY 1545 FEET.
		0.28584 DATA MILES	52	APPROXIMATELY 1715 FEET.
		0.31728 DATA MILES	53	APPROXIMATELY 1904 FEET.
		0.35218 DATA MILES	54	APPROXIMATELY 2113 FEET.
		0.39092 DATA MILES	55	APPROXIMATELY 2346 FEET.
		0.43393 DATA MILES	56	APPROXIMATELY 2604 FEET.
		0.48166 DATA MILES	57	APPROXIMATELY 2890 FEET.
		0.53464 DATA MILES	58	APPROXIMATELY 3208 FEET.
		0.59345 DATA MILES	59	APPROXIMATELY 3561 FEET.
		0.65873 DATA MILES	60	APPROXIMATELY 3952 FEET.
		0.73119 DATA MILES	61	APPROXIMATELY 4387 FEET.
		0.81162 DATA MILES	62	APPROXIMATELY 4870 FEET.
		0.90090 DATA MILES	63	APPROXIMATELY 5405 FEET.
		1.00000 DATA MILES	64	APPROXIMATELY 6000 FEET.
		1.11000 DATA MILES	65	APPROXIMATELY 6660 FEET.
		1.23210 DATA MILES	66	APPROXIMATELY 7393 FEET.
		1.36763 DATA MILES	67	APPROXIMATELY 8206 FEET.
		1.51807 DATA MILES	68	APPROXIMATELY 9108 FEET.
		1.68506 DATA MILES	69	APPROXIMATELY 10110 FEET.
		1.87041 DATA MILES	70	APPROXIMATELY 11223 FEET.
		2.07616 DATA MILES	71	APPROXIMATELY 12457 FEET.
		2.30454 DATA MILES	72	APPROXIMATELY 13827 FEET.
		2.55804 DATA MILES	73	APPROXIMATELY 15348 FEET.
		2.83942 DATA MILES	74	APPROXIMATELY 17037 FEET.
		3.15176 DATA MILES	75	APPROXIMATELY 18911 FEET.
		3.49845 DATA MILES	76	APPROXIMATELY 20991 FEET.
		3.88328 DATA MILES	77	APPROXIMATELY 23300 FEET.
		4.31044 DATA MILES	78	APPROXIMATELY 25863 FEET.
		4.78459 DATA MILES	79	APPROXIMATELY 28708 FEET.
		5.31090 DATA MILES	80	APPROXIMATELY 31865 FEET.
		5.89509 DATA MILES	81	APPROXIMATELY 35371 FEET.
		6.54355 DATA MILES	82	APPROXIMATELY 39261 FEET.
		7.26335 DATA MILES	83	APPROXIMATELY 43580 FEET.
		8.06231 DATA MILES	84	APPROXIMATELY 48374 FEET.
		8.94917 DATA MILES	85	APPROXIMATELY 53695 FEET.
		9.93358 DATA MILES	86	APPROXIMATELY 59601 FEET.
		11.02627 DATA MILES	87	APPROXIMATELY 66158 FEET.
		12.23916 DATA MILES	88	APPROXIMATELY 73435 FEET.
		13.58547 DATA MILES	89	APPROXIMATELY 81513 FEET.
		15.07987 DATA MILES	90	APPROXIMATELY 90479 FEET.

FIELD CODING FOR J3.0C5

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
419	001	AREA MAJOR AXIS, 4 -----	(CONTINUED)	
		16.73866 DATA MILES	91	APPROXIMATELY 100432 FEET.
		18.57991 DATA MILES	92	APPROXIMATELY 111480 FEET.
		20.62370 DATA MILES	93	APPROXIMATELY 123742 FEET.
		22.89231 DATA MILES	94	APPROXIMATELY 137354 FEET.
		25.41046 DATA MILES	95	APPROXIMATELY 152463 FEET.
		28.20561 DATA MILES	96	APPROXIMATELY 169234 FEET.
		31.30823 DATA MILES	97	APPROXIMATELY 187849 FEET.
		34.75213 DATA MILES	98	APPROXIMATELY 208513 FEET.
		38.57487 DATA MILES	99	APPROXIMATELY 231449 FEET.
		42.81810 DATA MILES	100	APPROXIMATELY 256909 FEET.
		47.52810 DATA MILES	101	APPROXIMATELY 285169 FEET.
		52.75619 DATA MILES	102	APPROXIMATELY 316537 FEET.
		58.55937 DATA MILES	103	APPROXIMATELY 351356 FEET.
		65.00090 DATA MILES	104	APPROXIMATELY 390005 FEET.
		72.15100 DATA MILES	105	APPROXIMATELY 432906 FEET.
		80.08761 DATA MILES	106	APPROXIMATELY 480526 FEET.
		88.89725 DATA MILES	107	APPROXIMATELY 533384 FEET.
		98.67595 DATA MILES	108	APPROXIMATELY 592056 FEET.
		109.53030 DATA MILES	109	APPROXIMATELY 657182 FEET.
		121.57864 DATA MILES	110	APPROXIMATELY 729472 FEET.
		134.95229 DATA MILES	111	APPROXIMATELY 809714 FEET.
		149.79704 DATA MILES	112	APPROXIMATELY 898782 FEET.
		166.27472 DATA MILES	113	APPROXIMATELY 997648 FEET.
		184.56494 DATA MILES	114	APPROXIMATELY 1107390 FEET.
		204.86710 DATA MILES	115	APPROXIMATELY 1229203 FEET.
		227.40248 DATA MILES	116	APPROXIMATELY 1364415 FEET.
		252.41675 DATA MILES	117	APPROXIMATELY 1514501 FEET.
		280.18259 DATA MILES	118	APPROXIMATELY 1681096 FEET.
		311.00269 DATA MILES	119	APPROXIMATELY 1866016 FEET.
		345.21298 DATA MILES	120	APPROXIMATELY 2071278 FEET.
		383.18643 DATA MILES	121	APPROXIMATELY 2299119 FEET.
		425.33694 DATA MILES	122	APPROXIMATELY 2552022 FEET.
		472.12399 DATA MILES	123	APPROXIMATELY 2832744 FEET.
		524.05762 DATA MILES	124	APPROXIMATELY 3144346 FEET.
		581.70398 DATA MILES	125	APPROXIMATELY 3490224 FEET.
		645.69147 DATA MILES	126	APPROXIMATELY 3874149 FEET.
		716.71753 DATA MILES	127	APPROXIMATELY 4300305 FEET.
419	002	AREA MINOR AXIS, 4 -----		THIS FIELD IS USED IN CONJUNCTION WITH THE SQUARE/CIRCLE SWITCH, AREA MAJOR AXIS, 4, AXIS ORIENTATION, LATITUDE, AND LONGITUDE TO DESCRIBE THE AREA OF

5.1-557

MIL-STD-6016B

FIELD CODING FOR J3.0C5

(SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

419	002	AREA MINOR AXIS, 4 -----	(CONTINUED)	
-----	-----	-----------------------------	-------------	--

A CIRCLE, ELLIPSE, SQUARE, OR RECTANGLE. THE AREA MINOR AXIS IS ALWAYS ORIENTED AT 90 DEGREES TO THE MAJOR AXIS. THE LENGTH EXPRESSED IN THIS FIELD IS DOUBLED AND CENTERED ON THE POSITION DESCRIBED BY THE LATITUDE AND LONGITUDE. THE INCREMENTS FOR THIS FIELD ARE EXPONENTIAL AND COMPUTED BY USING THE FOLLOWING FORMULA: LENGTH IN DATA MILES EQUALS 1.11 TO THE (BIT CODE - 64) POWER. EXAMPLE: FOR DI VALUE 5, LENGTH = 1.11 TO THE (5-64) POWER.

NO STATEMENT	0
0.00140 DATA MILES	1
0.00155 DATA MILES	2
0.00172 DATA MILES	3
0.00191 DATA MILES	4
0.00212 DATA MILES	5
0.00235 DATA MILES	6
0.00261 DATA MILES	7
0.00290 DATA MILES	8
0.00322 DATA MILES	9
0.00357 DATA MILES	10
0.00396 DATA MILES	11
0.00440 DATA MILES	12
0.00488 DATA MILES	13
0.00542 DATA MILES	14
0.00601 DATA MILES	15
0.00668 DATA MILES	16
0.00741 DATA MILES	17
0.00823 DATA MILES	18
0.00913 DATA MILES	19
0.01013 DATA MILES	20
0.01125 DATA MILES	21
0.01249 DATA MILES	22
0.01386 DATA MILES	23
0.01538 DATA MILES	24
0.01708 DATA MILES	25
0.01896 DATA MILES	26
0.02104 DATA MILES	27
0.02335 DATA MILES	28

APPROXIMATELY 8 FEET.
APPROXIMATELY 9 FEET.
APPROXIMATELY 10 FEET.
APPROXIMATELY 11 FEET.
APPROXIMATELY 13 FEET.
APPROXIMATELY 14 FEET.
APPROXIMATELY 16 FEET.
APPROXIMATELY 17 FEET.
APPROXIMATELY 19 FEET.
APPROXIMATELY 21 FEET.
APPROXIMATELY 24 FEET.
APPROXIMATELY 26 FEET.
APPROXIMATELY 29 FEET.
APPROXIMATELY 33 FEET.
APPROXIMATELY 36 FEET.
APPROXIMATELY 40 FEET.
APPROXIMATELY 45 FEET.
APPROXIMATELY 49 FEET.
APPROXIMATELY 55 FEET.
APPROXIMATELY 61 FEET.
APPROXIMATELY 68 FEET.
APPROXIMATELY 75 FEET.
APPROXIMATELY 83 FEET.
APPROXIMATELY 92 FEET.
APPROXIMATELY 103 FEET.
APPROXIMATELY 114 FEET.
APPROXIMATELY 126 FEET.
APPROXIMATELY 140 FEET.

FIELD CODING FOR J3.0C5

(SHEET 8)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
419	002	AREA MINOR AXIS, 4	(CONTINUED)	
		0.02592 DATA MILES	29	APPROXIMATELY 156 FEET.
		0.02878 DATA MILES	30	APPROXIMATELY 173 FEET.
		0.03194 DATA MILES	31	APPROXIMATELY 192 FEET.
		0.03545 DATA MILES	32	APPROXIMATELY 213 FEET.
		0.03935 DATA MILES	33	APPROXIMATELY 236 FEET.
		0.04368 DATA MILES	34	APPROXIMATELY 262 FEET.
		0.04849 DATA MILES	35	APPROXIMATELY 291 FEET.
		0.05382 DATA MILES	36	APPROXIMATELY 323 FEET.
		0.05974 DATA MILES	37	APPROXIMATELY 359 FEET.
		0.06631 DATA MILES	38	APPROXIMATELY 398 FEET.
		0.07361 DATA MILES	39	APPROXIMATELY 442 FEET.
		0.08170 DATA MILES	40	APPROXIMATELY 490 FEET.
		0.09069 DATA MILES	41	APPROXIMATELY 544 FEET.
		0.10067 DATA MILES	42	APPROXIMATELY 604 FEET.
		0.11174 DATA MILES	43	APPROXIMATELY 671 FEET.
		0.12403 DATA MILES	44	APPROXIMATELY 744 FEET.
		0.13768 DATA MILES	45	APPROXIMATELY 826 FEET.
		0.15282 DATA MILES	46	APPROXIMATELY 917 FEET.
		0.16963 DATA MILES	47	APPROXIMATELY 1018 FEET.
		0.18829 DATA MILES	48	APPROXIMATELY 1130 FEET.
		0.20900 DATA MILES	49	APPROXIMATELY 1254 FEET.
		0.23199 DATA MILES	50	APPROXIMATELY 1392 FEET.
		0.25751 DATA MILES	51	APPROXIMATELY 1545 FEET.
		0.28584 DATA MILES	52	APPROXIMATELY 1715 FEET.
		0.31728 DATA MILES	53	APPROXIMATELY 1904 FEET.
		0.35218 DATA MILES	54	APPROXIMATELY 2113 FEET.
		0.39092 DATA MILES	55	APPROXIMATELY 2346 FEET.
		0.43393 DATA MILES	56	APPROXIMATELY 2604 FEET.
		0.48166 DATA MILES	57	APPROXIMATELY 2890 FEET.
		0.53464 DATA MILES	58	APPROXIMATELY 3208 FEET.
		0.59345 DATA MILES	59	APPROXIMATELY 3561 FEET.
		0.65873 DATA MILES	60	APPROXIMATELY 3952 FEET.
		0.73119 DATA MILES	61	APPROXIMATELY 4387 FEET.
		0.81162 DATA MILES	62	APPROXIMATELY 4870 FEET.
		0.90090 DATA MILES	63	APPROXIMATELY 5405 FEET.
		1.00000 DATA MILES	64	APPROXIMATELY 6000 FEET.
		1.11000 DATA MILES	65	APPROXIMATELY 6660 FEET.
		1.23210 DATA MILES	66	APPROXIMATELY 7393 FEET.
		1.36763 DATA MILES	67	APPROXIMATELY 8206 FEET.
		1.51807 DATA MILES	68	APPROXIMATELY 9108 FEET.
		1.68506 DATA MILES	69	APPROXIMATELY 10110 FEET.
		1.87041 DATA MILES	70	APPROXIMATELY 11223 FEET.
		2.07616 DATA MILES	71	APPROXIMATELY 12457 FEET.

5.1-559

MIL-STD-6016B

FIELD CODING FOR J3.0C5

(SHEET 9)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
419	002	AREA MINOR AXIS, 4	(CONTINUED)	

		2.30454 DATA MILES	72	APPROXIMATELY 13827 FEET.
		2.55804 DATA MILES	73	APPROXIMATELY 15348 FEET.
		2.83942 DATA MILES	74	APPROXIMATELY 17037 FEET.
		3.15176 DATA MILES	75	APPROXIMATELY 18911 FEET.
		3.49845 DATA MILES	76	APPROXIMATELY 20991 FEET.
		3.88328 DATA MILES	77	APPROXIMATELY 23300 FEET.
		4.31044 DATA MILES	78	APPROXIMATELY 25863 FEET.
		4.78459 DATA MILES	79	APPROXIMATELY 28708 FEET.
		5.31090 DATA MILES	80	APPROXIMATELY 31865 FEET.
		5.89509 DATA MILES	81	APPROXIMATELY 35371 FEET.
		6.54355 DATA MILES	82	APPROXIMATELY 39261 FEET.
		7.26335 DATA MILES	83	APPROXIMATELY 43580 FEET.
		8.06231 DATA MILES	84	APPROXIMATELY 48374 FEET.
		8.94917 DATA MILES	85	APPROXIMATELY 53695 FEET.
		9.93358 DATA MILES	86	APPROXIMATELY 59601 FEET.
		11.02627 DATA MILES	87	APPROXIMATELY 66158 FEET.
		12.23916 DATA MILES	88	APPROXIMATELY 73435 FEET.
		13.58547 DATA MILES	89	APPROXIMATELY 81513 FEET.
		15.07987 DATA MILES	90	APPROXIMATELY 90479 FEET.
		16.73866 DATA MILES	91	APPROXIMATELY 100432 FEET.
		18.57991 DATA MILES	92	APPROXIMATELY 111480 FEET.
		20.62370 DATA MILES	93	APPROXIMATELY 123742 FEET.
		22.89231 DATA MILES	94	APPROXIMATELY 137354 FEET.
		25.41046 DATA MILES	95	APPROXIMATELY 152463 FEET.
		28.20561 DATA MILES	96	APPROXIMATELY 169234 FEET.
		31.30823 DATA MILES	97	APPROXIMATELY 187849 FEET.
		34.75213 DATA MILES	98	APPROXIMATELY 208513 FEET.
		38.57487 DATA MILES	99	APPROXIMATELY 231449 FEET.
		42.81810 DATA MILES	100	APPROXIMATELY 256909 FEET.
		47.52810 DATA MILES	101	APPROXIMATELY 285169 FEET.
		52.75619 DATA MILES	102	APPROXIMATELY 316537 FEET.
		58.55937 DATA MILES	103	APPROXIMATELY 351356 FEET.
		65.00090 DATA MILES	104	APPROXIMATELY 390005 FEET.
		72.15100 DATA MILES	105	APPROXIMATELY 432906 FEET.
		80.08761 DATA MILES	106	APPROXIMATELY 480526 FEET.
		88.89725 DATA MILES	107	APPROXIMATELY 533384 FEET.
		98.67595 DATA MILES	108	APPROXIMATELY 592056 FEET.
		109.53030 DATA MILES	109	APPROXIMATELY 657182 FEET.
		121.57864 DATA MILES	110	APPROXIMATELY 729472 FEET.
		134.95229 DATA MILES	111	APPROXIMATELY 809714 FEET.
		149.79704 DATA MILES	112	APPROXIMATELY 898782 FEET.
		166.27472 DATA MILES	113	APPROXIMATELY 997648 FEET.
		184.56494 DATA MILES	114	APPROXIMATELY 1107390 FEET.

5.1-560

MIL-STD-6016B

FIELD CODING FOR J3.0C5

(SHEET 10)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
419	002	AREA MINOR AXIS, 4 -----	(CONTINUED)	
		204.86710 DATA MILES	115	APPROXIMATELY 1229203 FEET.
		227.40248 DATA MILES	116	APPROXIMATELY 1364415 FEET.
		252.41675 DATA MILES	117	APPROXIMATELY 1514501 FEET.
		280.18259 DATA MILES	118	APPROXIMATELY 1681096 FEET.
		311.00269 DATA MILES	119	APPROXIMATELY 1866016 FEET.
		345.21298 DATA MILES	120	APPROXIMATELY 2071278 FEET.
		383.18643 DATA MILES	121	APPROXIMATELY 2299119 FEET.
		425.33694 DATA MILES	122	APPROXIMATELY 2552022 FEET.
		472.12399 DATA MILES	123	APPROXIMATELY 2832744 FEET.
		524.05762 DATA MILES	124	APPROXIMATELY 3144346 FEET.
		581.70398 DATA MILES	125	APPROXIMATELY 3490224 FEET.
		645.69147 DATA MILES	126	APPROXIMATELY 3874149 FEET.
		716.71753 DATA MILES	127	APPROXIMATELY 4300305 FEET.
380	001	SECOND -----		THE SECOND OF THE MINUTE.
		0 THROUGH 59	0 THROUGH 59	IN ONE SECOND INCREMENTS.
		ILLEGAL	60 THROUGH 62	
		NO STATEMENT	63	
769	044	TRACK NUMBER, RELATED 2 -----		TN OF BALLISTIC MISSILE TRACK THAT IS RELATED TO THE REFERENCE TN OF THE BALLISTIC MISSILE LAUNCH/IMPACT POINT MESSAGE.
		NO STATEMENT	0	
		NUMERIC	00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		ILLEGAL	00077 (OCTAL)	
		NUMERIC	00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC	00177 (OCTAL)	COLLECTIVE ADDRESS.
		NUMERIC	00200 THROUGH 07776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL	07777 (OCTAL)	
		NUMERIC	10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G.,

5.1-561

MIL-STD-6016B

FIELD CODING FOR J3.0C5 (SHEET 11)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	044	TRACK NUMBER, RELATED 2 -----	(CONTINUED)	
		NUMERIC	77777 (OCTAL)	TRACKS AND REFERENCE POINTS. ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
1107	004	CONNECT/DISCONNECT -----		INDICATES THE RELATIONSHIP OF A LAUNCH OR IMPACT POINT TO A REPORTED BALLISTIC MISSILE.
		CONNECT	0	THE LAUNCH OR IMPACT POINT IS RELATED TO THE RELATED 2 TN FIELD.
		DISCONNECT	1	THE LAUNCH OR IMPACT POINT IS NO LONGER RELATED TO THE RELATED 2 TN FIELD.

MIL-STD-6016B

J3.1 MESSAGE SUMMARY

PURPOSE

The J3.1 Emergency Point message is used to provide the location and type of an emergency that requires search and rescue.

DATA ELEMENT SUMMARY

<u>J3.1I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
EXERCISE INDICATOR	1
SPARE	3
SPECIAL PROCESSING INDICATOR	1
SIMULATION INDICATOR	1
TRACK NUMBER, REFERENCE	19
PERSONNEL INVOLVED	4
SPARE	5
EMERGENCY TYPE	4
TRACK NUMBER, PREVIOUSLY REPORTED	19

<u>J3.1E0</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
SPARE	2
LATITUDE, 0.0051 MINUTE	21
SPARE	2
LONGITUDE, 0.0051 MINUTE	22
SPARE	4
TIME FUNCTION	3
POSITION ACCURACY	3
MINUTE	6
HOURL	5

<u>J3.1C1</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
CONTINUATION WORD LABEL	5
SPARE	1
MODE I CODE	5
MODE II CODE	12
MODE III CODE	12
MODE IV INDICATOR	2
SPARE	31

MIL-STD-6016B

J3.1 TRANSMIT/RECEIVE RULES

TITLE: Emergency Point Message

TRANSMIT RULES

1. The J3.1B Emergency Point basic message consists of the J3.1I Emergency Point initial word and the J3.1E0 Emergency Point extension word. The J3.1B basic message shall be transmitted by the C² JU with R² once as follows:

- a. When an emergency point is initially reported.
 - b. When assuming R².
 - c. When data change.
 - d. When requested by a J7.1 Data Update Request Message.
 - e. Periodically at a RRN = 6 (12 seconds, 8-20 second interval) until the emergency is terminated.
2. The J3.1C1 Emergency Point IFF/SIF continuation word shall be transmitted with the J3.1B basic message when data are available.

RECEIVE RULES

The J3.1 message shall not be filtered.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: EMERGENCY POINT INITIAL WORD

24	23	22	21	20	19:	18:	17:	16	15	14:	13:	12	11	10:	09	08	07:	06	05	04	03	02:	01	00:	
<---					:SIM:		:	SPARE			:	:EX:	MESSAGE		:	SUBLABEL,		:	LABEL, J-SERIES			:	WORD		:
					:IND:		:SPI:				:	:IND:	LENGTH		:	J-SERIES		:	LABEL, J-SERIES			:	FORMAT		:
					:		:	:				:	:	INDICATOR		:	:				:	:			:
					: 1 :		: 1 :	3			:	: 1 :	3		:	3		:	5			:	2		:

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
EMERGENCY TYPE			:	SPARE				:	PERSONNEL INVOLVED			:	TRACK NUMBER, REFERENCE											
4			:	5				:	4			:	19											

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51:	50
:																				:
:	TRACK NUMBER, PREVIOUSLY REPORTED																			:---
:																				:
:	19																			:

WORD DESCRIPTION

WORD NUMBER: J3.1I

WORD TITLE: EMERGENCY POINT INITIAL WORD

REFERENCE			BIT	#	
DFI/DUI	DATA FIELD	DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD	FORMAT	0-	1 2	00
270 004	LABEL,	J-SERIES	2-	6 5	00011
271 005	SUBLABEL,	J-SERIES	7-	9 3	001
800 001	MESSAGE	LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
385 003	EXERCISE	INDICATOR (EX IND)	13	1	
756 003	SPARE		14-	16 3	
292 002	SPECIAL	PROCESSING INDICATOR (SPI)	17	1	
1604 001	SIMULATION	INDICATOR (SIM IND)	18	1	
769 002	TRACK	NUMBER, REFERENCE	19-	37 19	
1643 001	PERSONNEL	INVOLVED	38-	41 4	
756 005	SPARE		42-	46 5	
1641 001	EMERGENCY	TYPE	47-	50 4	
769 018	TRACK	NUMBER, PREVIOUSLY REPORTED	51-	69 19	

FIELD CODING FOR J3.1I

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
385	003	EXERCISE INDICATOR -----		INDICATES WHETHER OR NOT THE MESSAGE IDENTIFIES AN EXERCISE TRACK.
		NON-EXERCISE TRACK	0	
		EXERCISE TRACK OR UNIT	1	
292	002	SPECIAL PROCESSING INDICATOR -----		INDICATES THAT A MESSAGE REQUIRES SPECIAL PROCESSING.
		SPECIAL PROCESSING NOT REQUIRED	0	
		SPECIAL PROCESSING REQUIRED	1	
1604	001	SIMULATION INDICATOR -----		INDICATES WHETHER THE TRACK REFER- ENCED IN THE MESSAGE IS A REAL OR A SIMULATED TRACK.
		REAL TRACK OR UNIT	0	
		SIMULATED TRACK OR UNIT	1	
769	002	TRACK NUMBER, REFERENCE -----		A REFERENCE NUMBER USED TO ASSOCIATE INFORMATION AND DIRECTIVES WITH THE TRACK. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE- BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.

FIELD CODING FOR J3.1I				(SHEET 2)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
				CODING CHARACTER
				00000 0
				00001 1
				00010 2
				00011 3
				00100 4
				00101 5
				00110 6
				00111 7
				01000 A
				01001 B
				01010 C
				01011 D
				01100 E
				01101 F
				01110 G
				01111 H
				10000 J
				10001 K
				10010 L
				10011 M
				10100 N
				10101 P
				10110 Q
				10111 R
				11000 S
				11001 T
				11010 U
				11011 V
				11100 W
				11101 X
				11110 Y
				11111 Z
		00000	0	NO STATEMENT.
		00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		00077	63	ILLEGAL.
		00100-00175	64 THROUGH 125	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		00176	126	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		00177	127	COLLECTIVE ADDRESS.

			FIELD CODING FOR J3.1I	(SHEET 3)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		00200-07776	128 THROUGH 4094	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		07777 0A000-0Z777	4095 4096 THROUGH 16383	ILLEGAL. ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		10000-17777	16384 THROUGH 20479	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		20000-27777	32768 THROUGH 36863	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE

			FIELD CODING FOR J3.1I	(SHEET 4)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		50000-57777	81920 THROUGH 86015	USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		70000-77776	114688 THROUGH 118782	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
1643	001	PERSONNEL INVOLVED -----		INDICATES AN ESTIMATE OF THE NUMBER OF PERSONNEL REQUIRING SEARCH AND RESCUE IN CONNECTION WITH THE EMERGENCY BEING REPORTED.
		NO STATEMENT	0	
		PERSONNEL INVOLVED	1 THROUGH 12	
		FEW (2 THROUGH 7)	13	
		PERSONNEL INVOLVED		

FIELD CODING FOR J3.1I

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1643	001	PERSONNEL INVOLVED ----- MANY (>7 AND < OR = TO 12) PERSONNEL INVOLVED GREATER THAN 12 PERSONNEL INVOLVED	(CONTINUED) 14 15	
1641	001	EMERGENCY TYPE ----- NO STATEMENT/OTHER DOWN AIRCRAFT MAN IN WATER DITCHING BAILOUT DISTRESSED VESSEL UNDEFINED	 0 1 2 3 4 5 6 THROUGH 15	INDICATES THE TYPE OF EMERGENCY THAT IS BEING REPORTED IN THE MESSAGE.
769	018	TRACK NUMBER, PREVIOUSLY REPORTED -----		THE TN THAT WAS PREVIOUSLY USED TO REPORT THE TRACK THAT NOW HAS THE EMERGENCY. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE- BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANNN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.

FIELD CODING FOR J3.1I				(SHEET 6)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	018	TRACK NUMBER, PREVIOUSLY REPORTED -----	(CONTINUED)	
				CODING CHARACTER
				00000 0
				00001 1
				00010 2
				00011 3
				00100 4
				00101 5
				00110 6
				00111 7
				01000 A
				01001 B
				01010 C
				01011 D
				01100 E
				01101 F
				01110 G
				01111 H
				10000 J
				10001 K
				10010 L
				10011 M
				10100 N
				10101 P
				10110 Q
				10111 R
				11000 S
				11001 T
				11010 U
				11011 V
				11100 W
				11101 X
				11110 Y
				11111 Z
		00000	0	NO STATEMENT.
		00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		00077	63	ILLEGAL.
		00100-00175	64 THROUGH 125	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		00176	126	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.

			FIELD CODING FOR J3.1I	(SHEET 7)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	018	TRACK NUMBER, PREVIOUSLY REPORTED -----	(CONTINUED)	
		00177 00200-07776	127 128 THROUGH 4094	COLLECTIVE ADDRESS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		07777 0A000-0Z777	4095 4096 THROUGH 16383	ILLEGAL. ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		10000-17777	16384 THROUGH 20479	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		20000-27777	32768 THROUGH 36863	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G.,

			FIELD CODING FOR J3.1I	(SHEET 8)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	018	TRACK NUMBER, PREVIOUSLY REPORTED -----	(CONTINUED)	
		4A000-4Z777	69632 THROUGH 81919	TRACKS AND REFERENCE POINTS. ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		70000-77776	114688 THROUGH 118782	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.

WORD MAP

WORD NUMBER: J3.1E0

WORD TITLE: EMERGENCY POINT EXTENSION WORD

:	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04:	03	02:	01	00:
:	LATITUDE, 0.0051 MINUTE																				:	SP	:	WORD	:
:																					:	SP	:	FORMAT	:
:																					:		:		:
:	21																				:	2	:	2	:

49:	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27:	26	25:
<---	:	LONGITUDE, 0.0051 MINUTE																				:	SP	:
:	:																					:		:
:	:																					:		:
:	:	22																				:	2	:

:	69	68	67	66	65:	64	63	62	61	60	59:	58	57	56:	55	54	53:	52	51	50
:	HOUR					:	MINUTE					:	POSITION	:	TIME	:	SPARE			
:						:						:	ACCURACY	:	FUNCTION	:				
:						:						:		:		:				
:	5					:	6					:	3	:	3	:	4			

WORD DESCRIPTION

WORD NUMBER: J3.1E0

WORD TITLE: EMERGENCY POINT EXTENSION WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	10
756 002	SPARE (SP)	2-	3 2	
281 014	LATITUDE, 0.0051 MINUTE	4-	24 21	
756 002	SPARE (SP)	25-	26 2	
282 014	LONGITUDE, 0.0051 MINUTE	27-	48 22	
756 004	SPARE	49-	52 4	
1681 001	TIME FUNCTION	53-	55 3	
1642 001	POSITION ACCURACY	56-	58 3	
797 004	MINUTE	59-	64 6	
792 001	HOURL	65-	69 5	

FIELD CODING FOR J3.1E0

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
281	014	LATITUDE, 0.0051 MINUTE -----		THE PRECISION IS APPROXIMATELY 31 FEET. IN 90/1,048,575 DEGREE INCREMENTS.
		0 DEGREES	0	
		+90/1,048,575 THROUGH	1 THROUGH 1048575	
		+90 DEGREES NORTH		
		NO STATEMENT	1048576	
		-90 THROUGH	1048577 THROUGH 2097151	
		-90/1,048,575 DEGREES SOUTH		
282	014	LONGITUDE, 0.0051 MINUTE -----		THE PRECISION IS APPROXIMATELY 31 FEET. IN 180/2,097,151 DEGREE INCREMENTS.
		0 DEGREES	0	
		+180/2,097,151 THROUGH	1 THROUGH 2097151	
		+180 DEGREES EAST		
		NO STATEMENT	2097152	
		-180 THROUGH	2097153 THROUGH 4194303	
		-180/2,097,151 DEGREES WEST		
1681	001	TIME FUNCTION -----		USED IN CONJUNCTION WITH THE MINUTE AND HOUR FIELDS TO DESCRIBE THE TIME FUNCTION ASSOCIATED WITH THE REPORTED TIME.
		NO STATEMENT	0	
		ACTIVATION TIME	1	
		DEACTIVATION TIME	2	
		ARRIVAL TIME	3	
		DEPARTURE TIME	4	
		TIME POINT ESTABLISHED	5	THE TIME THE REPORTED POSITION FOR THE POINT WAS ESTABLISHED. THIS MAY BE A TIME PRIOR TO DATA ENTRY.
		NON-OP TIME	6	THE TIME THE SITE IS EXPECTED TO BECOME LESS THAN FULLY OPERATIONAL.
		OP TIME	7	THE TIME THE SITE IS EXPECTED TO RETURN FULLY OPERATIONAL.
1642	001	POSITION ACCURACY -----		INDICATES THE RELATIVE ACCURACY OF THE EMERGENCY POSITION BEING RE- PORTED IN TERMS OF THE RADIUS OF A CIRCLE MEASURED OUTWARD FROM THE POSITION IN DATA MILES.

FIELD CODING FOR J3.1E0

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1642	001	POSITION ACCURACY -----	(CONTINUED)	
		NO STATEMENT	0	
		1/4 DATA MILE OR LESS	1	
		1 DATA MILE OR LESS	2	
		5 DATA MILES OR LESS	3	
		20 DATA MILES OR LESS	4	
		50 DATA MILES OR LESS	5	
		GREATER THAN 50 DATA MILES	6	
		LAST KNOWN POSITION	7	
797	004	MINUTE -----		THE MINUTE OF THE HOUR.
		0 THROUGH 59	0 THROUGH 59	IN ONE MINUTE INCREMENTS.
		ILLEGAL	60 THROUGH 62	
		NO STATEMENT	63	
792	001	HOUR -----		EXPRESSES TIME OF DAY OR A PERIOD OF TIME IN HOURS.
		0 HOUR	0	
		1 THROUGH 23 HOURS	1 THROUGH 23	IN ONE HOUR INCREMENTS.
		ILLEGAL	24 THROUGH 30	
		NO STATEMENT	31	

.....

WORD TITLE: EMERGENCY POINT IFF/SIF CONTINUATION WORD

:	24	23	22	21	20	19	18	17	16	15	14	13	:	12	11	10	09	08	:	07	:	06	05	04	03	02	:	01	00	:
:													:						:	:	CONTINUATION WORD					:	WORD	:		
:	MODE II CODE												:	MODE I CODE					:	SP	:	LABEL					:	FORMAT	:	
:													:						:	:						:	:	:		
:	12												:	5					:	1	:	5					:	2	:	

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
										:	M4	IND	:	MODE III CODE										:
										:	2	:	12										:	

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50
:																				
:																				
:											SPARE									
:																				
:											31									

WORD DESCRIPTION

WORD NUMBER: J3.1C1

WORD TITLE: EMERGENCY POINT IFF/SIF CONTINUATION WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	00001
756 001	SPARE (SP)	7	1	
293 003	MODE I CODE	8-	12 5	SEE NOTE 1.
294 002	MODE II CODE	13-	24 12	SEE NOTE 1.
295 002	MODE III CODE	25-	36 12	SEE NOTE 1.
298 001	MODE IV INDICATOR (M4 IND)	37-	38 2	SEE NOTE 1.
756 031	SPARE	39-	69 31	

MIL-STD-6016B

J3.1C1 WORD NOTES

TITLE: Emergency Point IFF/SIF Continuation Word

NOTE 1 - JUs with the appropriate IFF/SIF equipment shall implement Mode I Code, Mode II Code, Mode III Code, and Mode IV Indicator. JUs that can only interlace two modes at one time shall transmit only the appropriate codes.

FIELD CODING FOR J3.1C1

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
293	003	MODE I CODE -----		PROVIDES MODE I BEACON REPLY INFORMATION. WITHIN THE MODE FIELD, SIF CODES ARE IN THE ORDER A4 A2 A1 B2 B1. THE LEAST SIGNIFICANT DIGIT CANNOT BE GREATER THAN 3. THIS CODE CANNOT BE ASSIGNED AS AN OPERATIONAL CODE. INDICATES THERE ARE NO DATA FOR TRANSMISSION.
		0 (NO STATEMENT)	00 (OCTAL)	
		1	01 (OCTAL)	
		2	02 (OCTAL)	
		3	03 (OCTAL)	
		4	10 (OCTAL)	
		5	11 (OCTAL)	
		6	12 (OCTAL)	
		7	13 (OCTAL)	
		8	20 (OCTAL)	
		9	21 (OCTAL)	
		10	22 (OCTAL)	
		11	23 (OCTAL)	
		12	30 (OCTAL)	
		13	31 (OCTAL)	
		14	32 (OCTAL)	
		15	33 (OCTAL)	
		16	40 (OCTAL)	
		17	41 (OCTAL)	
		18	42 (OCTAL)	
		19	43 (OCTAL)	
		20	50 (OCTAL)	
		21	51 (OCTAL)	
		22	52 (OCTAL)	
		23	53 (OCTAL)	
		24	60 (OCTAL)	
		25	61 (OCTAL)	
		26	62 (OCTAL)	
		27	63 (OCTAL)	
		28	70 (OCTAL)	
		29	71 (OCTAL)	
		30	72 (OCTAL)	
		31	73 (OCTAL)	
294	002	MODE II CODE -----		PROVIDES MODE II BEACON REPLY INFORMATION. THIS CODE CANNOT BE ASSIGNED AS AN OPERATIONAL CODE. INDICATES THERE
		NO STATEMENT	0	

FIELD CODING FOR J3.1C1

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
294	002	MODE II CODE -----	(CONTINUED)	
		1 THROUGH 7777 (OCTAL)	0001 THROUGH 7777 (OCTAL)	ARE NO DATA FOR TRANSMISSION. WITHIN THE FIELD, SIF CODES ARE IN THE ORDER A, B, C, D WITH EACH TRIAD IN THE ORDER 4, 2, 1.
295	002	MODE III CODE -----		PROVIDES MODE III BEACON REPLY INFORMATION.
		NO STATEMENT	0	THIS CODE CANNOT BE ASSIGNED AS AN OPERATIONAL CODE. INDICATES THERE ARE NO DATA FOR TRANSMISSION.
		1 THROUGH 7777 (OCTAL)	0001 THROUGH 7777 (OCTAL)	WITHIN THE FIELD, SIF CODES ARE IN THE ORDER A, B, C, D WITH EACH TRIAD IN THE ORDER 4, 2, 1.
298	001	MODE IV INDICATOR -----		THE MODE IV BEACON REPLY.
		NOT INTERROGATED/NO STATEMENT	0	
		INTERROGATED, NO RESPONSE	1	
		INTERROGATED, INVALID RESPONSE	2	
		INTERROGATED, VALID RESPONSE	3	

MIL-STD-6016B

J3.2 MESSAGE SUMMARY

PURPOSE

The J3.2 Air Track message is used to exchange information on air tracks.

DATA ELEMENT SUMMARY

<u>J3.2I</u>		<u>J3.2C1 (Continued)</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	AIR PLATFORM(6)*****	
LABEL, J-SERIES	5	AIR PLATFORM ACTIVITY(7)	*
SUBLABEL, J-SERIES	3	AIR SPECIFIC TYPE(12)	* 13
MESSAGE LENGTH INDICATOR	3	SPARE(1)*****	
EXERCISE INDICATOR	1	SPARE	5
PPLI TRACK NUMBER AND IDENTITY	1	MINUTE	6
INDICATOR		HOUR	5
FORCE TELL INDICATOR	1		
EMERGENCY INDICATOR	1		
SPECIAL PROCESSING INDICATOR	1		
SIMULATION INDICATOR	1		
TRACK NUMBER, REFERENCE	19		
STRENGTH	4		
ALTITUDE SOURCE	2		
ALTITUDE, 25 FT	13		
IDENTITY DIFFERENCE INDICATOR	1		
TRACK QUALITY	4		
IDENTITY CONFIDENCE	4		
IDENTITY(3)*****			
IDENTITY AMPLIFYING	*		
DESCRIPTOR(3)*****	3		
SPECIAL INTEREST INDICATOR	1		

<u>J3.2C4</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
CONTINUATION WORD LABEL	5
CALLSIGN, PUBLISHED	54
SPARE	9

<u>J3.2E0</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
SPARE	2
LATITUDE, 0.0051 MINUTE	21
DISUSED	1
SPARE	1
LONGITUDE, 0.0051 MINUTE	22
PASSIVE/ACTIVE INDICATOR	1
COURSE	9
SPEED	11

<u>J3.2C1</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
CONTINUATION WORD LABEL	5
AIR SPECIFIC TYPE INDICATOR	1
MODE I CODE	5
MODE II CODE	12
MODE III CODE	12
MODE IV INDICATOR	2
PPLI IFF/SIF INDICATOR	2

J3.2 TRANSMIT/RECEIVE RULES

TITLE: Air Track Message

TRANSMIT RULES

l. The J3.2B Air Track basic message consists of the J3.2I Air Track initial word and the J3.2E0 Air Track extension word. The J3.2B basic message shall be transmitted once by the JU with R²:

- a. When reporting a new air track on the interface.
- b. When assuming R² of an air track.
- c. When a track alert is initiated on the air track.
- d. Periodically at a RRN = 6 (12 seconds, 8-20 second interval) for real-time air tracks.
- e. Periodically at a RRN = 4 (48 seconds, 36-60 second interval) for nonreal-time air tracks.
- f. When identity changes for real-time air tracks.
- g. When any data element changes for nonreal-time air tracks.
- h. When a J7.1 (ACT = 1) Data Update Request by Track Number message is received on the air track.
- i. When J2.2 Air PPLI messages are no longer being received on a track for which local sensor data exist, in accordance with paragraph 4.4.2.2.1.
- j. When a J7.5 (ACT = 2) IFF/SIF update request message is received on the air track.
- k. When any IFF/SIF data are changed from No Data status (zero) to Valid Data status (nonzero) or from Valid Data to other Valid Data.

J3.2 TRANSMIT/RECEIVE RULES (Continued)

TRANSMIT RULES (Continued)

1. When transmission of IFF/SIF data is required by Table 4.7-8.
2. The J3.2C1 Air Track Amplification continuation word shall be transmitted by the JU with R²:
 - a. The same as a, b, c, h, i, k and l above if any data elements in the J3.2C1 word are held for real-time air tracks.
 - b. At the next periodic transmission of the basic message when any data in the J3.2C1 word changes, other than IFF/SIF data.
 - c. Every 8 transmissions of the J3.2B basic message for real-time air tracks, if any data elements in the J3.2C1 word are held.
 - d. With each nonreal-time air track message.
 - e. When a J7.5 (ACT = 2) message is received on the air track regardless of the No Data or Valid Data status of data held.
 - f. When Air Platform and/or Air Platform Activity, as well as Air Specific Type data are available, the J3.2I/J3.2E0/J3.2C1 word sequence may be sent in alternate transmissions with the Air Specific Type Indicator set to value 0 and then with the Air Specific Type Indicator set to value 1.
3. The J3.2C4 Air Track Amplification continuation word, if implemented, shall be transmitted by the JU with R²:
 - a. The same as 1a, 1b, 1c, 1h, and 1i above if any data elements in the J3.2C4 word are held for real-time air tracks.
 - b. At the next periodic transmission of the basic message when any data in the J3.2C4 word changes.

J3.2 TRANSMIT/RECEIVE RULES (Continued)

TRANSMIT RULES (Continued)

c. Every 8(1-16, 1) transmission of the J3.2B basic message for real-time air tracks if any data elements in the J3.2C4 word are held.

d. With each nonreal-time air track message.

4. The J3.2 messages on the specified air track shall cease being transmitted upon receipt of a J2.2 message from the unit being reported once the TN correlation has been completed. Additional criteria regarding the priority/management of J2.2 or J3.2 messages are contained in paragraphs 4.3 and 4.4 of Section 4.

RECEIVE RULES

There are no receive rules specified for this message.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: AIR TRACK INITIAL WORD

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
					:	ALT	SRC	:	STRENGTH				:	TRACK NUMBER, REFERENCE										
					:	2	:	4				:	19											

:	69:	68	67	66:	65	64	63	62:	61	60	59	58:	57:	56	55	54	53	52	51	50
:	:	IDENTITY			:				:	TRACK QUALITY			:	:						
:	SI	-----			:	IDENTITY			:	TRACK QUALITY			:	ID	ALTITUDE, 25 FT					
:	IND:	ID AMP			:	CONFIDENCE			:				:	DIF:						
:	:	DESCR			:				:				:	:						
:	1	:	3			:	4			:	4			:	1	:	13			

WORD DESCRIPTION

WORD NUMBER: J3.2I

WORD TITLE: AIR TRACK INITIAL WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	00
270	004	LABEL, J-SERIES	2-	6 5	00011
271	005	SUBLABEL, J-SERIES	7-	9 3	010
800	001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
385	003	EXERCISE INDICATOR (EX IND)	13	1	
839	001	PPLI TRACK NUMBER AND IDENTITY INDICATOR (PP T/I)	14	1	
354	002	FORCE TELL INDICATOR (FT IND)	15	1	
355	002	EMERGENCY INDICATOR (EMG IND)	16	1	
292	002	SPECIAL PROCESSING INDICATOR (SPI)	17	1	
1604	001	SIMULATION INDICATOR (SIM IND)	18	1	
769	002	TRACK NUMBER, REFERENCE	19-	37 19	
386	013	STRENGTH	38-	41 4	
364	001	ALTITUDE SOURCE (ALT SRC)	42-	43 2	SET TO ZERO WHEN ALTITUDE, 25 FT IS UNKNOWN.
365	033	ALTITUDE, 25 FT	44-	56 13	
1860	001	IDENTITY DIFFERENCE INDICATOR (ID DIF)	57	1	
280	001	TRACK QUALITY	58-	61 4	
1663	001	IDENTITY CONFIDENCE (ID CON)	62-	65 4	
376	007	IDENTITY	66-	68 3	
376	001	IDENTITY AMPLIFYING DESCRIPTOR (ID AMP DESCR)	66-	68 3	
1861	001	SPECIAL INTEREST INDICATOR (SI IND)	69	1	

FIELD CODING FOR J3.2I

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
385	003	EXERCISE INDICATOR -----		INDICATES WHETHER OR NOT THE MESSAGE IDENTIFIES AN EXERCISE TRACK.
		NON-EXERCISE TRACK	0	
		EXERCISE TRACK OR UNIT	1	
839	001	PPLI TRACK NUMBER AND IDENTITY INDICATOR -----		INDICATES WHETHER OR NOT THE REFERENCE TN AND IDENTITY IN THIS MESSAGE WAS RECEIVED PREVIOUSLY IN A PPLI MESSAGE.
		NO STATEMENT	0	
		SOURCE OF TN AND IDENTITY IS FROM PPLI	1	INDICATES THAT THE REFERENCE TN AND IDENTITY IN THIS MESSAGE WAS RECEIVED IN A PPLI MESSAGE.
354	002	FORCE TELL INDICATOR -----		THIS INDICATOR CAUSES TRACK/POINT DATA TO BE FORCED THROUGH CONTROLLABLE RECEIVE FILTERS.
		NO STATEMENT	0	
		FORCE TELL STATUS	1	
355	002	EMERGENCY INDICATOR -----		USED TO INDICATE WHETHER OR NOT A UNIT OR TRACK HAS AN EMERGENCY.
		NO STATEMENT	0	
		EMERGENCY STATUS	1	
292	002	SPECIAL PROCESSING INDICATOR -----		INDICATES THAT A MESSAGE REQUIRES SPECIAL PROCESSING.
		SPECIAL PROCESSING NOT REQUIRED	0	
		SPECIAL PROCESSING REQUIRED	1	
1604	001	SIMULATION INDICATOR -----		INDICATES WHETHER THE TRACK REFERENCED IN THE MESSAGE IS A REAL OR A SIMULATED TRACK.
		REAL TRACK OR UNIT	0	
		SIMULATED TRACK OR UNIT	1	
769	002	TRACK NUMBER, REFERENCE -----		A REFERENCE NUMBER USED TO ASSOCIATE INFORMATION AND DIRECTIVES WITH THE TRACK. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH

5.1-592

MIL-STD-6016B

FIELD CODING FOR J3.2I (SHEET 2)				
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	

FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE-BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANNN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6
00111	7
01000	A
01001	B
01010	C
01011	D
01100	E
01101	F
01110	G
01111	H
10000	J
10001	K
10010	L
10011	M
10100	N

FIELD CODING FOR J3.2I			(SHEET 3)
DFI	DUI	DUI/DI NAME	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)
			10101 P
			10110 Q
			10111 R
			11000 S
			11001 T
			11010 U
			11011 V
			11100 W
			11101 X
			11110 Y
			11111 Z
		00000	0
		00001-00076	1 THROUGH 62
		00077	63
		00100-00175	64 THROUGH 125
		00176	126
		00177	127
		00200-07776	128 THROUGH 4094
		07777	4095
		0A000-0Z777	4096 THROUGH 16383
		10000-17777	16384 THROUGH 20479
		1A000-1Z777	20480 THROUGH 32767
		20000-27777	32768 THROUGH 36863
			NO STATEMENT.
			ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU). ILLEGAL.
			ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU). RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
			COLLECTIVE ADDRESS.
			ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
			ILLEGAL.
			ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
			ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
			ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
			ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G.,

			FIELD CODING FOR J3.2I	(SHEET 4)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		2A000-2Z777	36864 THROUGH 49151	TRACKS AND REFERENCE POINTS. ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		70000-77776	114688 THROUGH 118782	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO

FIELD CODING FOR J3.2I (SHEET 5)				
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		77777	118783	C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS. ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
386	013	STRENGTH -----		EXPRESSES THE NUMBER OF ENTITIES REPRESENTED BY A SINGLE TRACK.
		NO STATEMENT	0	
		1 UNIT	1	
		2 UNITS	2	
		3 UNITS	3	
		4 UNITS	4	
		5 UNITS	5	
		6 UNITS	6	
		7 UNITS	7	
		8 UNITS	8	
		9 UNITS	9	
		10 UNITS	10	
		11 UNITS	11	
		12 UNITS	12	
		2 THROUGH 7 (FEW) UNITS	13	
		GREATER THAN 7 (MANY) UNITS	14	
		GREATER THAN 12 UNITS	15	
364	001	ALTITUDE SOURCE -----		IDENTIFIES THE SOURCE OF THE ALTITUDE DATA IN A MESSAGE.
		NO STATEMENT/ESTIMATED	0	IF ALTITUDE IS UNKNOWN, THE ALTITUDE SOURCE IS UNKNOWN. IF ALTITUDE HAS A VALUE, THEN ALTITUDE SOURCE IS ESTIMATED.
		SENSOR	1	THE REPORTED ALTITUDE IS SENSOR MEASURED.
		MANUAL AIRCRAFT REPORT	2	OPERATOR HAS MANUALLY ENTERED AN ALTITUDE BASED ON AIRCREW VOICE REPORT OR MODE C IFF/LINK 4A REPORT FROM THE AIRCRAFT.

FIELD CODING FOR J3.2I				(SHEET 6)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
364	001	ALTITUDE SOURCE ----- AUTOMATIC AIRCRAFT REPORT	(CONTINUED) 3	ALTITUDE AUTOMATICALLY RECEIVED FROM AIRCRAFT IN REAL TIME VIA MODE C OR LINK 4A AND AUTOMATICALLY TRANSMITTED TO THE INTERFACE.
365	033	ALTITUDE, 25 FT ----- 0 THROUGH 204,750 FEET ALTITUDE UNKNOWN	0 THROUGH 8190 8191	EXPRESSES ALTITUDE AS MEASURED OUT- WARD FROM THE EARTH AS A POSITIVE QUANTITY ABOVE MEAN SEA LEVEL (MSL) IN FEET. IN 25 FEET INCREMENTS.
1860	001	IDENTITY DIFFERENCE INDICATOR ----- NO STATEMENT IDENTITY DIFFERENCE	0 1	THE IDENTITY DIFFERENCE INDICATOR IS USED TO INDICATE THAT A CONFLICT IN THE IDENTITY OF THE TRACK/ REFERENCE TN IS CURRENTLY BEING EVALUATED BY THE UNIT WITH REPORTING RESPONSIBILITY. NO IDENTITY DIFFERENCE EXISTS ON REFERENCE TN AT THIS TIME, OR PREVIOUS CONFLICT HAS BEEN RESOLVED. AN IDENTITY DIFFERENCE EXISTS ON REFERENCE TN. THE IDENTITY BEING REPORTED IS THE LATEST IDENTITY LOCALLY HELD BY THE UNIT WITH REPORTING RESPONSIBILITY PRIOR TO THE CONFLICT, NOT THE CONFLICTING IDENTITY CURRENTLY UNDER OPERATOR EVALUATION.
280	001	TRACK QUALITY ----- NON REAL-TIME TRACK	0	THE TRACK QUALITY IS STATED AS A NUMERICAL VALUE FROM 1 TO 15 WITH THE HIGHER VALUES INDICATING THE HIGHER TRACK QUALITIES. THE TQ IS BASED ON THE POSITIONAL ACCURACY OF A TRACK REPRESENTED BY AN AREA IN SQUARE DATA MILES WITHIN WHICH IT IS ASSESSED THAT THERE IS A 95% PROBABILITY THAT THE TRACK LIES. A TRACK REPORT IS IDENTIFIED AS A NONREAL-TIME REPORT WITH TQ = 0 IF

FIELD CODING FOR J3.2I

(SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

280	001	TRACK QUALITY	(CONTINUED)	
-----	-----	---------------	-------------	--

ANY OF THE FOLLOWING CONDITIONS
ARE TRUE: THE TRACK DATA
ORIGINATE FROM OTHER THAN A TDS OR
JTIDS/MIDS EQUIPPED AIRCRAFT; THE
TRACK DATA HAVE BEEN RELAYED FROM
ANOTHER SYSTEM BY OTHER THAN A
REAL-TIME DATA LINK INTERFACE; THE
TRACK DATA HAVE BEEN DERIVED FROM
OTHER THAN INTEGRATED SENSORS.

> 2,755 SQUARE DATA MILES	1
EQUAL TO OR < 2,755 SQUARE DATA MILES	2
EQUAL TO OR < 686 SQUARE DATA MILES	3
EQUAL TO OR < 439 SQUARE DATA MILES	4
EQUAL TO OR < 247 SQUARE DATA MILES	5
EQUAL TO OR < 110 SQUARE DATA MILES	6
EQUAL TO OR < 27.0 SQUARE DATA MILES	7
EQUAL TO OR < 4.4 SQUARE DATA MILES	8
EQUAL TO OR < 1.10 SQUARE DATA MILES	9
EQUAL TO OR < 0.0281 SQUARE DATA MILES	10
EQUAL TO OR < 0.0070 SQUARE DATA MILES	11
EQUAL TO OR < 0.0018 SQUARE DATA MILES	12
EQUAL TO OR < 0.0004 SQUARE DATA MILES	13
EQUAL TO OR < 0.0001 SQUARE DATA MILES	14
EQUAL TO OR < 0.00003 SQUARE DATA MILES	15

1663	001	IDENTITY CONFIDENCE	
------	-----	---------------------	--

UNDEFINED

0 THROUGH 15

FIELD CODING FOR J3.2I

(SHEET 8)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
376	007	IDENTITY -----		EXPRESSES THE STANDARD IDENTITY OF A TRACK.
		PENDING	0	A TRACK WHICH HAS NOT BEEN SUBJECTED TO THE IDENTIFICATION PROCESS.
		UNKNOWN	1	AN EVALUATED TRACK WHICH HAS NOT BEEN IDENTIFIED.
		ASSUMED FRIEND	2	A TRACK WHICH IS ASSUMED TO BE A FRIEND BECAUSE OF ITS CHARACTERISTICS, BEHAVIOR, OR ORIGIN.
		FRIEND	3	A TRACK BELONGING TO A DECLARED FRIENDLY NATION.
		NEUTRAL	4	A TRACK WHOSE CHARACTERISTICS, BEHAVIOR, ORIGIN, OR NATIONALITY INDICATE THAT IT IS NEITHER SUPPORTING NOR OPPOSING FRIENDLY FORCES.
		SUSPECT	5	A TRACK WHICH IS POTENTIALLY HOSTILE BECAUSE OF ITS CHARACTERISTICS, BEHAVIOR, ORIGIN, OR NATIONALITY.
		HOSTILE	6	A TRACK DECLARED TO BELONG TO ANY OPPOSING NATION, PARTY, GROUP, OR ENTITY, WHICH BY VIRTUE OF ITS BEHAVIOR OR INFORMATION COLLECTED ON IT SUCH AS CHARACTERISTICS, ORIGIN OR NATIONALITY CONTRIBUTES TO THE THREAT TO FRIENDLY FORCES.
		UNDEFINED	7	
376	001	IDENTITY AMPLIFYING DESCRIPTOR -----		A DESCRIPTOR ADDING TO THE STANDARD IDENTITY OF A TRACK INVOLVED IN AN EXERCISE. THE STANDARD IDENTITY IS FRIEND.
		EXERCISE PENDING	0	
		EXERCISE UNKNOWN	1	
		EXERCISE ASSUMED FRIEND	2	
		EXERCISE FRIEND	3	
		EXERCISE NEUTRAL	4	
		JOKER	5	
		FAKER	6	
		UNDEFINED	7	
1861	001	SPECIAL INTEREST INDICATOR -----		THE SPECIAL INTEREST INDICATOR IS USED TO INDICATE THAT THE TRACK IS

			FIELD CODING FOR J3.2I	(SHEET 9)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1861	001	SPECIAL INTEREST INDICATOR -----	(CONTINUED)	
		NO STATEMENT	0	OF SPECIAL INTEREST.
		SPECIAL INTEREST	1	THE REFERENCE TN IS OF SPECIAL INTEREST. (A.) IF THIS FIELD IS SET TO ONE AND THE IDENTITY IS FRIEND THIS TRACK IS DEFINED AS A "KILO". (B.) IF THIS FIELD IS SET TO ONE AND THE TRACK ENVIRONMENT/CATEGORY IS AIR AND THE IDENTITY IS SUSPECT, THE TRACK IS DEFINED AS A "ZOMBIE". (C.) IF THIS FIELD IS SET TO ONE AND THE TRACK ENVIRONMENT/CATEGORY IS SURFACE (MARITIME) AND THE IDENTITY IS SUSPECT, THE TRACK IS DEFINED AS A "TRAVELLER". (D.) THE USE OF THIS INDICATOR WITH OTHER IDENTITIES IS YET TO BE DETERMINED.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: AIR TRACK EXTENSION WORD

```

: 49: 48 47 46 45 44 43 42 41 40 39 38 37 36 35 34 33 32 31 30 29 28 27: 26: 25:
: PAS:
: ACT: LONGITUDE, 0.0051 MINUTE : SP : DUD:
: : :
: 1 : 22 : 1 : 1 :

```

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50	:		
:												:											:
:	SPEED											:	COURSE										:
:												:											:
:	11											:	9										:

WORD DESCRIPTION

WORD NUMBER: J3.2E0
WORD TITLE: AIR TRACK EXTENSION WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	10
756 002	SPARE (SP)	2-	3 2	
281 014	LATITUDE, 0.0051 MINUTE	4-	24 21	
758 001	DISUSED (DUD)	25	1	
756 001	SPARE (SP)	26	1	
282 014	LONGITUDE, 0.0051 MINUTE	27-	48 22	
892 001	PASSIVE/ACTIVE INDICATOR (PAS ACT)	49	1	
371 015	COURSE	50-	58 9	
367 018	SPEED	59-	69 11	

FIELD CODING FOR J3.2E0

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
281	014	LATITUDE, 0.0051 MINUTE -----		THE PRECISION IS APPROXIMATELY 31 FEET. IN 90/1,048,575 DEGREE INCREMENTS.
		0 DEGREES	0	
		+90/1,048,575 THROUGH +90 DEGREES NORTH	1 THROUGH 1048575	
		NO STATEMENT	1048576	
		-90 THROUGH -90/1,048,575 DEGREES SOUTH	1048577 THROUGH 2097151	
282	014	LONGITUDE, 0.0051 MINUTE -----		THE PRECISION IS APPROXIMATELY 31 FEET. IN 180/2,097,151 DEGREE INCREMENTS.
		0 DEGREES	0	
		+180/2,097,151 THROUGH +180 DEGREES EAST	1 THROUGH 2097151	
		NO STATEMENT	2097152	
		-180 THROUGH -180/2,097,151 DEGREES WEST	2097153 THROUGH 4194303	
892	001	PASSIVE/ACTIVE INDICATOR -----		THIS INDICATOR IDENTIFIES THE TYPE OF SENSOR AS EITHER PASSIVE OR ACTIVE.
		PASSIVE	0	DATA BEING REPORTED WAS DERIVED FROM A PASSIVE SENSOR SYSTEM.
		ACTIVE	1	DATA BEING REPORTED WAS DERIVED FROM AN ACTIVE SENSOR SYSTEM.
371	015	COURSE -----		INDICATES THE DIRECTION OF TRAVEL OF AN OBJECT IN DEGREES WITH RESPECT TO TRUE NORTH. IN 1 DEGREE INCREMENTS.
		0 THROUGH 359 DEGREES	0 THROUGH 359	
		ILLEGAL	360 THROUGH 510	
		NO STATEMENT	511	
367	018	SPEED -----		THE RATE OF CHANGE OF POSITION.
		0 THROUGH 4092 DATA MILES PER HOUR	0 THROUGH 2046	EXPRESSES GROUND SPEED IN 2 DATA MILES PER HOUR INCREMENTS.
		NO STATEMENT	2047	

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J3.2C1

WORD TITLE: AIR TRACK AMPLIFICATION CONTINUATION WORD

:	24	23	22	21	20	19	18	17	16	15	14	13:	12	11	10	09	08:	07:	06	05	04	03	02:	01	00:						
:	MODE II CODE												:	MODE I CODE					:	AST: CONTINUATION WORD				:	WORD		:				
:													:						:	IND: LABEL				:	FORMAT		:				
:													:						:					:			:				
:	12												:	5					:	1				:	5		:	2		:	
:	49	48	47	46	45	44	43	42	41:	40	39:	38	37:	36	35	34	33	32	31	30	29	28	27	26	25:						
<---	:	AIR PLATFORM								:	:	:	:	MODE III CODE														:			
:	:									:	PP	IFF	:	M4	IND	:															:
:	:									:	:	:	:															:			
:	AIR SPECIFIC TYPE								:	:	:	:															:				
:	13								:	2		:	2		:	12														:	
:	69	68	67	66	65:	64	63	62	61	60	59:	58	57	56	55	54:	53	52	51	50											
:	HOUR								:	MINUTE								:	SPARE								:	AIR PLATFORM ACTIVITY			
:									:									:									:				
:									:									:									:	:SP : --->			
:	5								:	6								:	5								:				

WORD DESCRIPTION

WORD NUMBER: J3.2C1

WORD TITLE: AIR TRACK AMPLIFICATION CONTINUATION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550 001		WORD FORMAT	0-	1 2	01
1551 001		CONTINUATION WORD LABEL	2-	6 5	00001
267 002		AIR SPECIFIC TYPE INDICATOR (AST IND)	7	1	
293 003		MODE I CODE	8-	12 5	SEE NOTE 1.
294 002		MODE II CODE	13-	24 12	SEE NOTE 1.
295 002		MODE III CODE	25-	36 12	SEE NOTE 1.
298 001		MODE IV INDICATOR (M4 IND)	37-	38 2	SEE NOTE 1.
839 002		PPLI IFF/SIF INDICATOR (PP IFF)	39-	40 2	
1797 001		AIR PLATFORM	41-	46 6	
1798 001		AIR PLATFORM ACTIVITY	47-	53 7	
804 001		AIR SPECIFIC TYPE	41-	52 12	
756 001		SPARE (SP)	53	1	
756 005		SPARE	54-	58 5	
797 004		MINUTE	59-	64 6	
792 001		HOURL	65-	69 5	

MIL-STD-6016B

J3.2C1 WORD NOTES

TITLE: Air Track Amplification Continuation Word

NOTE 1 - JUs with the appropriate IFF/SIF equipment shall implement Mode I Code, Mode II Code, Mode III Code, and Mode IV Indicator. JUs that can only interlace two modes at one time shall transmit only the appropriate codes.

FIELD CODING FOR J3.2C1

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
267	002	AIR SPECIFIC TYPE INDICATOR -----		INDICATES WHETHER AIR PLATFORM/AIR PLATFORM ACTIVITY OR AIR SPECIFIC TYPE IS BEING REPORTED.
		AIR PLATFORM/AIR PLATFORM ACTIVITY BEING REPORTED	0	
		AIR SPECIFIC TYPE BEING REPORTED	1	
293	003	MODE I CODE -----		PROVIDES MODE I BEACON REPLY INFORMATION. WITHIN THE MODE FIELD, SIF CODES ARE IN THE ORDER A4 A2 A1 B2 B1. THE LEAST SIGNIFICANT DIGIT CANNOT BE GREATER THAN 3.
		0 (NO STATEMENT)	00 (OCTAL)	THIS CODE CANNOT BE ASSIGNED AS AN OPERATIONAL CODE. INDICATES THERE ARE NO DATA FOR TRANSMISSION.
		1	01 (OCTAL)	
		2	02 (OCTAL)	
		3	03 (OCTAL)	
		4	10 (OCTAL)	
		5	11 (OCTAL)	
		6	12 (OCTAL)	
		7	13 (OCTAL)	
		8	20 (OCTAL)	
		9	21 (OCTAL)	
		10	22 (OCTAL)	
		11	23 (OCTAL)	
		12	30 (OCTAL)	
		13	31 (OCTAL)	
		14	32 (OCTAL)	
		15	33 (OCTAL)	
		16	40 (OCTAL)	
		17	41 (OCTAL)	
		18	42 (OCTAL)	
		19	43 (OCTAL)	
		20	50 (OCTAL)	
		21	51 (OCTAL)	
		22	52 (OCTAL)	
		23	53 (OCTAL)	
		24	60 (OCTAL)	
		25	61 (OCTAL)	
		26	62 (OCTAL)	
		27	63 (OCTAL)	

FIELD CODING FOR J3.2C1

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
293	003	MODE I CODE ----- 28 29 30 31	(CONTINUED) 70 (OCTAL) 71 (OCTAL) 72 (OCTAL) 73 (OCTAL)	
294	002	MODE II CODE ----- NO STATEMENT 1 THROUGH 7777 (OCTAL)	0 0001 THROUGH 7777 (OCTAL)	PROVIDES MODE II BEACON REPLY INFORMATION. THIS CODE CANNOT BE ASSIGNED AS AN OPERATIONAL CODE. INDICATES THERE ARE NO DATA FOR TRANSMISSION. WITHIN THE FIELD, SIF CODES ARE IN THE ORDER A, B, C, D WITH EACH TRIAD IN THE ORDER 4, 2, 1.
295	002	MODE III CODE ----- NO STATEMENT 1 THROUGH 7777 (OCTAL)	0 0001 THROUGH 7777 (OCTAL)	PROVIDES MODE III BEACON REPLY INFORMATION. THIS CODE CANNOT BE ASSIGNED AS AN OPERATIONAL CODE. INDICATES THERE ARE NO DATA FOR TRANSMISSION. WITHIN THE FIELD, SIF CODES ARE IN THE ORDER A, B, C, D WITH EACH TRIAD IN THE ORDER 4, 2, 1.
298	001	MODE IV INDICATOR ----- NOT INTERROGATED/NO STATEMENT INTERROGATED, NO RESPONSE INTERROGATED, INVALID RESPONSE INTERROGATED, VALID RESPONSE	0 1 2 3	THE MODE IV BEACON REPLY.
839	002	PPLI IFF/SIF INDICATOR ----- NO STATEMENT SOURCE OF MODE II CODE IS FROM PPLI SOURCE OF ALL IFF DATA IS FROM PPLI	0 1 2	INDICATES WHETHER OR NOT THE IFF/SIF DATA IN THIS MESSAGE WAS RECEIVED PREVIOUSLY IN A PPLI MESSAGE. THE MODE II CODE IN THIS MESSAGE WAS RECEIVED PREVIOUSLY IN A PPLI MESSAGE. ALL IFF/SIF DATA IN THIS MESSAGE WAS RECEIVED PREVIOUSLY IN A PPLI

FIELD CODING FOR J3.2C1

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
839	002	PPLI IFF/SIF INDICATOR -----	(CONTINUED)	
		UNDEFINED	3	MESSAGE.
1797	001	AIR PLATFORM -----		THE AIR PLATFORM FIELD ALONG WITH THE AIR PLATFORM ACTIVITY FIELD FURTHER DEFINES THE IDENTITY OF AN AIR TRACK.
		NO STATEMENT	0	
		FIGHTER	1	
		FIGHTER BOMBER	2	
		ATTACK	3	
		BOMBER	4	
		RECONNAISSANCE	5	
		TANKER	6	
		TANKER (BOOM ONLY)	7	
		TANKER (DROGUE ONLY)	8	
		INTERCEPTOR	9	
		TRANSPORT	10	
		AIRBORNE COMMAND POST (ACP)	11	
		MISSILE CARRIER	12	
		MISSILE	13	
		ELECTRONIC WARFARE (EW)	14	
		ANTISUBMARINE WARFARE (ASW)	15	
		AIRBORNE EARLY WARNING AND CONTROL (AEW)	16	
		MARITIME PATROL AIRCRAFT (MPA)	17	
		SEARCH AND RESCUE (SAR)	18	
		DRONE	19	
		REMOTELY PILOTED VEHICLE (RPV)	20	
		FIXED WING GUNSHIP	21	
		CIVIL, AIRLINER	22	
		CIVIL, GENERAL	23	
		LIGHTER THAN AIR (LTA)	24	
		GLIDER	25	
		DECOY	26	
		HELICOPTER (HELO)	27	
		ATTACK HELICOPTER	28	
		HELICOPTER GUNSHIP	29	

FIELD CODING FOR J3.2C1

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

1797	001	AIR PLATFORM	(CONTINUED)	
------	-----	--------------	-------------	--

		ANTISUBMARINE WARFARE	30	
		HELICOPTER (ASW HELO)		
		MINE WARFARE HELICOPTER	31	
		TRANSPORT HELICOPTER	32	
		TACTICAL SUPPORT	33	
		PATROL	34	
		MISCELLANEOUS FIXED WING	35	
		MISSILE CONTROL UNIT	36	
		SURFACE-TO-AIR MISSILE	37	
		(SAM)		
		AIR-TO-SURFACE MISSILE	38	
		(ASM)		
		SURFACE-TO-SURFACE	39	
		MISSILE (SSM)		
		LOGISTIC	40	
		AIR-TO-AIR MISSILE (AAM)	41	
		SUBSURFACE-TO-SURFACE	42	
		MISSILE		
		SURFACE-TO-SUBSURFACE	43	
		MISSILE		
		CRUISE MISSILE	44	
		BALLISTIC MISSILE	45	
		AIRBORNE LAND	46	
		SURVEILLANCE		
		AIRBORNE LASER	47	
		UNDEFINED	48 THROUGH 62	
		RESET TO NO STATEMENT	63	

1798	001	AIR PLATFORM ACTIVITY		
------	-----	-----------------------	--	--

		NO STATEMENT	0	
		RECONNAISSANCE	1	
		OVER THE HORIZON	2	
		TARGETING (OTHT)		
		TRAINING	3	
		LOGISTICS SUPPORT	4	
		ANTISURFACE WARFARE	5	
		ELECTRONIC WARFARE (EW)	6	
		SURVEILLANCE	7	
		SEARCH AND RESCUE (SAR)	8	
		ESCORTING	9	

THE AIR PLATFORM ACTIVITY FIELD
ALONG WITH THE AIR PLATFORM FIELD
FURTHER DEFINES THE IDENTITY OF AN
AIR TRACK.

5.1-612

MIL-STD-6016B

FIELD CODING FOR J3.2C1

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1798	001	AIR PLATFORM ACTIVITY	(CONTINUED)	

		MINELAYING	10	
		TRANSITING	11	
		SPECIAL WEAPONS ATTACK	12	
		INTRUDING	13	
		ELECTRONIC WARFARE	14	
		SUPPORT (ES)		
		COMMUNICATIONS RELAY	15	
		PATROL (OCEAN	16	
		SURVEILLANCE)		
		AIRLIFT (TRANSPORT)	17	
		ANTISUBMARINE WARFARE	18	
		(ASW)		
		SHADOWING/INTERVENING	19	
		TOWING	20	
		AIR ASSAULT	21	
		INTERCEPTION	22	
		ELECTRONIC ATTACK (EA)	23	
		POLICING	24	
		CONVENTIONAL ATTACK	25	
		MEDICAL EVACUATION	26	
		(MEDEVAC)		
		MINE COUNTERMEASURES	27	
		SEARCH	28	
		REFUELING/TANKING	29	
		INTERDICTION	30	
		COMBAT AIR PATROL (CAP)	31	
		FORWARD AIR CONTROLLER	32	
		(FAC)		
		VERY IMPORTANT PERSON	33	
		(VIP) FLIGHT		
		NONCOMBATANT OPERATIONS	34	
		CLOSE AIR SUPPORT (CAS)	35	
		AIRBORNE EARLY WARNING	36	
		(AEW)		
		GROUND ATTACK TACTICS	37	
		(GAT)		
		AIRBORNE COMMAND POST	38	
		(ACP)		
		RESCUE COMBAT AIR PATROL	39	
		(RESCAP)		
		SURFACE COMBAT AIR	40	
		PATROL (SUCAP)		
		TANKING	41	

FIELD CODING FOR J3.2C1

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1798	001	AIR PLATFORM ACTIVITY -----	(CONTINUED)	
		SPOTTING	42	
		STRIKE WARFARE	43	
		SPECIAL	44	
		HIJACK	45	
		JAMMER	46	
		TROOPLIFT	47	
		XRAY	48	
		ANTIAIR WARFARE (AAW)	49	
		COMMAND AND CONTROL	50	
		COUNTER-AIR WARFARE	51	
		RETURN TO BASE (RTB)	52	
		MINE WARFARE	53	
		CHAFF LAYING	54	
		VIDEO DATA LINKING (TARGETING)	55	A METHOD OF PROVIDING REMOTE TARGETING DATA TO A FIRING PLATFORM/WEAPON.
		DIPPING	56	
		RESCUE HELO	57	
		ORBITING	58	
		UNDER RECALL	59	
		ENGAGING	60	
		ENGAGING (PRIORITY KILL)	61	
		INVESTIGATING	62	
		CLEARED TO DROP	63	
		INTERVENING	64	
		DIVERTING	65	
		AIR-TO-GROUND	66	
		AIR-TO-AIR	67	
		PRECISION BOMBING	68	
		LASER DESIGNATION	69	
		BEACON BOMBING	70	
		SHADOWING	71	
		COVERING	72	
		VISUAL IDENTIFICATION	73	
		HIGH ENERGY LASING	74	
		UNDEFINED	75 THROUGH 114	
		AIR ACTIVITY 1 THROUGH 12	115 THROUGH 126	A SPECIFIC AIR MISSION DEFINED BY THE JOINT OPERATIONAL COMMANDER.
		RESET TO NO STATEMENT	127	
804	001	AIR SPECIFIC TYPE -----		THE SPECIFIC TYPE OF POINT OR TRACK WITH AN ENVIRONMENT/CATEGORY OF AIR.

5.1-614

MIL-STD-6016B

FIELD CODING FOR J3.2C1

(SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		NO STATEMENT	0	

		FIGHTER		

		F-4 PHANTOM II	1	
		F-5 TIGER II	2	
		F-8 CRUSADER	3	
		F-14 TOMCAT	4	
		F-15 EAGLE	5	
		F-16 FIGHTING FALCON	6	
		F-101 VOODOO	7	
		F-104 STARFIGHTER	8	
		F-105 THUNDERCHIEF	9	
		F-106 DELTA DART	10	
		F-111 (GENERAL DYNAMICS)	11	
		F/A-18 HORNET	12	
		EFA	13	
		F-102	14	
		F-100	15	
		DISUSED	16	
		DISUSED	17	
		COMMANDO	18	
		DISUSED	19	
		DISUSED	20	
		J-35 DRAGEN	21	
		JAGUAR	22	
		SUPER ETENDARD	23	
		DISUSED	24	THROUGH 26
		F-1 (MITSUBISHI)	27	
		F-35XD DRAGEN	28	
		DISUSED	29	
		HF-24 MARUT (WIND SPIRIT)	30	
		JA37 VIGGEN	31	
		DISUSED	32	
		SF-5 FREEDOM FIGHTER	33	
		IAR-91 ORAO	34	
		AJEET INVINCIBLE	35	
		KFIR C2	36	
		MIRAGE F1	37	
		MIRAGE 3	38	

FIELD CODING FOR J3.2C1

(SHEET 8)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		MIRAGE 5	39	
		MIRAGE 50	40	
		MIRAGE 2000	41	
		DISUSED	42	
		DISUSED	43	
		ALPHA JET	44	
		KEFIR	45	
		F-6 FARMER	46	
		F-8 FISHBED	47	
		F-9 FANTAN	48	
		F-12 (CHINA)	49	
		SU-7 FITTER	50	
		SU-9 FISHPOT	51	
		SU-11 FLAGON	52	
		SU-15 FLAGON	53	
		SU-17 FITTER	54	
		SU-19 FENCER	55	
		SU-20 FITTER	56	
		SU-22 FITTER	57	
		SU-24 FENCER	58	
		SU-25 FROGFOOT	59	
		TU-28 FIDDLER	60	
		TU-128 FIDDLER	61	
		MIG-21 FISHBED	62	
		MIG-23 FLOGGER	63	
		MIG-25 FOXBAT	64	
		MIG-27 FLOGGER	65	
		YAK-28 FIREBAR	66	
		YAK-36 FORGER	67	
		AAF "RAM-J"	68	
		MIG-15 FAGOT	69	
		MIG-17 FRESCO	70	
		MIG-19 FARMER	71	
		SU-27 FLANKER	72	
		MIG-29 FULCRUM	73	
		MIG-31 FOXHOUND	74	
		YAK-38 FORGER-A	75	
		F-22 RAPTOR	76	
		F-84 THUNDERSTREAK	77	
		F-86 SABRE	78	
		F/A2 SEA HARRIER	79	
		IDF CHING-KUO (TAIWAN)	80	
		JAS-39 GRIPPEN	81	

FIELD CODING FOR J3.2C1

(SHEET 9)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		JIAN JI-7	82	
		JIAN JI-8-2	83	
		JOINT STRIKE FIGHTER	84	
		KFIR C7	85	
		KFIR 2000	86	
		RAFALE	87	
		SU-30	88	
		SU-33 (SU-27K)	89	
		SU-34	90	
		SU-35	91	
		SU-37	92	
		SU-39	93	
		YAK-141 FREESTYLE	94	
		F-5 FRESCO	95	
		F-7 FISHBED	96	
		J-9	97	
		RT33	98	
		CF-188 HORNET	99	
		UNDEFINED	100	
		TORNADO F3	101	
		SEA HARRIER	102	
		F-5 NORTHROP	103	
		UNDEFINED	104 THROUGH 254	
		FIGHTER GENERAL	255	

		BOMBERS/ATTACK		

		A-4 SKYHAWK	256	
		A-6 INTRUDER	257	
		A-7 CORSAIR II	258	
		A-10 THUNDERBOLT II	259	
		A-37 DRAGONFLY	260	
		B-1 (ROCKWELL)	261	
		B-52 STRATOFORTRESS	262	
		AC-130 HERCULES	263	
		AV-8 HARRIER	264	
		F/A-18 HORNET	265	
		FB-111 (GENERAL DYNAMICS)	266	
		A-1	267	
		TA-28	268	

FIELD CODING FOR J3.2C1

(SHEET 10)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		DISUSED	269	
		AC-47	270	
		AC-119	271	
		AC-124	272	
		ALPHA JET	273	
		DISUSED	274	THROUGH 276
		35XD DRAGEN	277	
		J-1 HAWK	278	
		J-1 JAESTREB	279	
		S-2	280	
		AJ37 VIGGEN	281	
		HA220 SUPER SAETA	282	
		M.B.326 (AERMACCHI)	283	
		M.B.339 (AERMACCHI)	284	
		SF 260 WARRIER	285	
		SK 60 (SAAB)	286	
		BAC 167 STRIKEMASTER	287	
		TORNADO GR-1 (IDS)	288	
		IL-28 BEAGLE	289	
		MI-4 BISON	290	
		TU-16 BADGER	291	
		TU-22 BLINDER	292	
		TU-22M BACKFIRE	293	
		TU-95 BEAR	294	
		TU-142 BEAR	295	
		YAK-28 BREWER	296	
		SUPER ENTENDARD	297	
		TU-160 BLACKJACK	298	
		AMX	299	
		FRS1 SEA HARRIER	300	
		FRS2 SEA HARRIER	301	
		FRS51 SEA HARRIER	302	
		F-117 NIGHTHAWK	303	
		G4 SUPER GALEB	304	
		G91Y	305	
		HAWK-2000	306	
		HAWK-100	307	
		HAWK-200	308	
		HAWK-50	309	
		HAWK-60	310	
		IA-58 PUCARA	311	
		IAR-93 ORAO	312	
		IAR-99 SOIM	313	

FIELD CODING FOR J3.2C1

(SHEET 11)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		JIAN JI-5M	314	
		A-5 FANTAN	315	
		L59 ALBATROS	316	
		B-2 SPIRIT	317	
		B-7 HONGZHA	318	
		1050E	319	
		A3 LEI MING	320	
		HARRIER GR4/7	321	
		TORNADO GR4	322	
		AV-8B HARRIER PLUS	323	
		CF-188 HORNET	324	
		RAFALE	325	
		UNDEFINED	326 THROUGH 510	
		BOMBER/ATTACK GENERAL	511	

		PATROL/RECON/ELECTRONIC/ TANKER/GENERAL		

		E-2 HAWKEYE	512	
		E-3 SENTRY (AWACS)	513	
		E-4 NEACP	514	
		EA-3	515	
		EA-6 PROWLER	516	
		EB-57 (DOUGLAS)	517	
		EC-130 HERCULES	518	
		EC-135 (BOEING)	519	
		EF-4 WILD WEASEL	520	
		EF-111 (GENERAL DYNAMICS)	521	
		EP-3 ORION	522	
		KA-3 (DOUGLAS)	523	
		KA-6 (GRUMMAN)	524	
		KC-10 EXTENDER	525	
		KC-130 HERCULES	526	
		KC-135 STRATOTANKER	527	
		O-1 BIRD DOG	528	
		O-2 (CESSNA)	529	
		OV-1 MOHAWK	530	
		OV-10 BRONCO	531	
		P-2 NEPTUNE	532	
		P-3 ORION	533	

FIELD CODING FOR J3.2C1

(SHEET 12)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		RC-130 HERCULES	534	
		RC-135 (BOEING)	535	
		RF-4 PHANTOM II	536	
		RF-5 (NORTHROP)	537	
		RF-8 CRUSADER	538	
		RF-14 TOMCAT	539	
		RF-104 STARFIGHTER	540	
		RP-3 ORION	541	
		RU-21 UTE	542	
		S-2 TRACKER	543	
		S-3 VIKING	544	
		SR-71 BLACKBIRD	545	
		U-2 (LOCKHEED)	546	
		U-4 AERO COMMANDER	547	
		U-5 H-500 TWIN	548	
		U-8 SEMINOLE	549	
		U-10 COURIER	550	
		UC-12 HURON	551	
		U-21 UTE	552	
		US-3 VIKING	553	
		OA-37 DRAGONFLY	554	
		TR-1	555	
		WC-130 HERCULES	556	
		E-1 TRACER	557	
		EB-66	558	
		EC-121	559	
		RA-3	560	
		SEA SCAN	561	
		FALCON 20 GUARDIAN	562	
		BR 1150 ATL1	563	
		RF-35XD DRAKEN	564	
		BN-2 MARITIME DEFENDER	565	
		DISUSED	566 THROUGH 567	
		CP-140 AURORA	568	
		HS.748 COASTGUARDER	569	
		HS.801 NIMROD	570	
		DISUSED	571	
		MK.3	572	
		RJ-1 HAWK	573	
		RJ-1 JAESTREB	574	
		SS-2	575	
		PEACE SENTINEL	576	
		KC-97	577	

5.1-620

MIL-STD-6016B

FIELD CODING FOR J3.2C1

(SHEET 13)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		AU-24	578	
		AU-23	579	
		U-21	580	
		U-17	581	
		HU-16	582	
		U-9	583	
		U-3	584	
		RU-21	585	
		NKC-135	586	
		RF-101	587	
		RF-111	588	
		RB-57	589	
		RB-66	590	
		RC-121	591	
		BE-12 MAIL	592	
		IL-38 MAY	593	
		TU-126 MOSS	594	
		BE-6	595	
		VC-10 (TANKER)	596	
		AN-12 CUB-A (ELINT)	597	
		AN-12 CUB-C (EA)	598	
		AN-12 CUB-D (EA)	599	
		IL-20 COOT-A (ELINT)	600	
		IL-76 MAINSTAY	601	
		E-8 (J STARS)	602	
		TORNADO ECR	603	
		E-6 MERCURY	604	
		EMB-111	605	
		MU-2S	606	
		A40 ALBATROS	607	
		BE42 ALBATROS	608	
		CL215 AMPHIBIAN	609	
		IAI 1125	610	
		IL22 COOT B	611	
		J32 LANSEN	612	
		SH5 HARBIN	613	
		TIER1	614	
		TIER2	615	
		TIER3	616	
		US1 (SHIN)	617	
		C-212 CASA	618	
		CESSNA 550 CITATION II	619	
		CESSNA 560 CITATION V	620	

FIELD CODING FOR J3.2C1

(SHEET 14)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		CL 215 CANADAIR	621	
		DORNIER 27	622	
		F-27 FOKKER	623	
		NIMROD MRA4	624	
		CP-140A AURORA/ARCTURUS	625	
		RC-135 RIVET JOINT	626	
		ATL 2	627	
		ETENDARD IV P	628	
		ALIZE	629	
		FALCON 50	630	
		MIRAGE IV	631	
		MIRAGE 2000	632	
		BR 1150 GE ATL ASW	633	
		BR 1150 GE ATL SIGINT	634	
		C-130 HERCULES TANKER	635	
		ASTOR	636	
		UNDEFINED	637 THROUGH 761	
		TANKER	762	
		RECONNAISSANCE (RECON)	763	
		ELECTRONIC WARFARE (EW)	764	
		ASW	765	
		AEW AND C	766	
		MISCELLANEOUS GENERAL	767	

		TRAINER		

		T-2 BUCKEYE	768	
		T-28 TROJAN	769	
		T-29 (CONVAIR)	770	
		T-34 MENTOR	771	
		T-37 TWEET	772	
		T-38 TALON	773	
		T-39 SABERLINER	774	
		T-41 MESCALERO	775	
		T-42 CONCHISE	776	
		T-43 (BOEING)	777	
		T-44 KING AIR	778	
		TA-4 SKYHAWK	779	
		TA-7 CORSAIR II	780	
		T-33	781	
		ALPHA JET	782	

5.1-622

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		B3LA (SAAB)	783	
		C-101 AVIOJET	784	
		G2-A GALEB	785	
		G2-A SEAGULL	786	
		L-29 DELFIN	787	
		L-29 MAYA	788	
		L-39 ALBATROS	789	
		L-70 MILTRAINER	790	
		L-450	791	
		P.55 (PARTENAVIA)	792	
		T-2 (MITSUBISHI)	793	
		CM 170 MAGISTER	794	
		M.B.339 (AERMACCHI)	795	
		T-2 (MITSUBISHI)	796	
		CM AU/ MAGISTER	797	
		M.B.339 (AERMACCHI)	798	
		SF-260 (SIAI-MARCHETTI)	799	
		SH 37 VIGGEN	800	
		QH-50 DRAGEN	801	
		SK 37 VIGGEN	802	
		SK 60 (SAAB)	803	
		TB30 EPSILON	804	
		TF-35XD	805	
		TJ-1 HAWK	806	
		TJ-1 JASTRAEB	807	
		TS.11 SPARK	808	
		AW1-2 FAN TRAINER	809	
		DISUSED	810	
		HJT-16 KIRAN	811	
		MBB223 FLAMINGO	812	
		SU-11 MAIDEN	813	
		SU-15	814	
		MIG-15 MIDGET	815	
		MIG-17	816	
		MIG-21 MONGOL	817	
		MIG-23	818	
		MIG-25	819	
		YAK-11 MOOSE	820	
		YAK-18 MAX	821	
		YAK-28 MAESTRO	822	
		TF-104 STARFIGHTER	823	
		T-46A	824	
		EMB-312 TOUCAN	825	

FIELD CODING FOR J3.2C1

(SHEET 16)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		T-45 GOSHAWK	826	
		T-47	827	
		AS202	828	
		CT114 TUTOR	829	
		G91T (FIAT JET 1)	830	
		K8 (NAMC)	831	
		L70 VINKA	832	
		STRIKEMASTER (BAE)	833	
		T1 JAYHAWK	834	
		T4 (KAWASAKI)	835	
		CT-142 DASH 8	836	
		B-55 BARON	837	
		F-33 BONANZA	838	
		839 PILLAN-TAMIZ	839	
		CT-133 SILVERSTAR	840	
		UNDEFINED	841 THROUGH 1022	
		TRAINER GENERAL	1023	

		TRANSPORT/AIRLINER		

		C-1 (GRUMMAN COD)	1024	
		C-2 GREYHOUND	1025	
		C-5 GALAXY	1026	
		C-7 CARIBOU	1027	
		C-9 NIGHTINGALE	1028	
		C-12 HURON	1029	
		C-123 PROVIDER	1030	
		C-130 HERCULES	1031	
		C-135 STRATOLIFTER	1032	
		C-140 JETSTAR	1033	
		C-141 STARLIFTER	1034	
		HC-130 HERCULES	1035	
		VC-6 KING AIR	1036	
		VC-9 SKYTRAIN II	1037	
		VC-11 GULFSTREAM	1038	
		VC-137 (BOEING)	1039	
		707 (BOEING)	1040	
		720 (BOEING)	1041	
		727 (BOEING)	1042	
		737 (BOEING)	1043	
		747 (BOEING)	1044	

5.1-624

MIL-STD-6016B

FIELD CODING FOR J3.2C1

(SHEET 17)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		757 (BOEING)	1045	
		767 (BOEING)	1046	
		L-100 HERCULES	1047	
		L-1011 TRI STAR	1048	
		DC-8 (DOUGLAS)	1049	
		DC-9 (DOUGLAS)	1050	
		DC-10 (DOUGLAS)	1051	
		C-119	1052	
		DC-130	1053	
		HC-97	1054	
		C-JM	1055	
		C-54	1056	
		C-97	1057	
		C-118	1058	
		C-119	1059	
		C-121	1060	
		C-124	1061	
		C-131	1062	
		C-133	1063	
		VC-47	1064	
		CV-54	1065	
		CV-140	1066	
		ARAVA	1067	
		CONCORDE	1068	
		ISLANDER	1069	
		SKYVAN	1070	
		TRIDENT	1071	
		A300 AIRBUS	1072	
		A310 AIRBUS	1073	
		C-1 (KAWASKI)	1074	
		C-160 TRANSALL	1075	
		C.207 AZOR	1076	
		C-212 AVIOCAR	1077	
		F27 FRIENDSHIPS	1078	
		F28 FELLOWSHIP	1079	
		G222 SAMA	1080	
		AW.660 ARGOSY	1081	
		BAC111 ONE-ELEVEN	1082	
		DHC-5 BUFFALO	1083	
		DHC-7 DASH	1084	
		AN-2 COLT	1085	
		AN-10 CAT	1086	
		AN-12 CUB	1087	

5.1-625

MIL-STD-6016B

FIELD CODING FOR J3.2C1

(SHEET 18)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		AN-14 CLOD	1088	
		AN-22 COCK	1089	
		AN-24 COKE	1090	
		AN-26 CURL	1091	
		AN-28 CASK	1092	
		AN-30 CLANK	1093	
		AN-32 CLINE	1094	
		AN-40 (VERY LARGE TURBO- PROP)	1095	
		AN-72 COALER	1096	
		IL-12 COACH	1097	
		IL-18 COOT	1098	
		IL-62 CLASSIC	1099	
		IL-76 CANDID	1100	
		IL-86 CAMBER	1101	
		TU-114 CLEAT	1102	
		TU-134 CRUSTY	1103	
		TU-144 CHARGER	1104	
		TU-154 CARELESS	1105	
		YAK-40 CODDLING	1106	
		YAK-42 CLOBBER	1107	
		TU-104	1108	
		YAK-27	1109	
		IL-38	1110	
		DISUSED	1111	
		D0-228 LT (TRANSPORT)	1112	
		DISUSED	1113	
		AN-74	1114	
		AN-124 CONDOR	1115	
		A320 AIRBUS	1116	
		A321 AIRBUS	1117	
		A330 AIRBUS	1118	
		A340 AIRBUS	1119	
		AN-70	1120	
		AN-225 COSSACK	1121	
		BAE-125-600	1122	
		BAE146	1123	
		777 (BOEING)	1124	
		C-17 GLOBEMASTER III	1125	
		C-20 GULFSTREAM 3/4	1126	
		C-21 LEARJET 35	1127	
		C-22	1128	
		C-23 SHERPA/SHORTS 330	1129	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		C-26 METRO 3	1130	
		YS 11 (NAMC)	1131	
		CL-600 CHALLENGER	1132	
		CL-601 CHALLENGER	1133	
		CN-235M (AIRTECH)	1134	
		EMB-120 BRASILLIA ADV	1135	
		EMB-145 AMAZON	1136	
		IL-78 MIDAS	1137	
		MD-11	1138	
		MD-80	1139	
		MD-90	1140	
		PD-808	1141	
		TU-44	1142	
		V-22 OSPREY	1143	
		VC-25	1144	
		XC-2	1145	
		1124 (IAI)	1146	
		1900 (BEECH)	1147	
		330 (SHORTS)	1148	
		580 (CONVAIR)	1149	
		ATR42	1150	
		B55 BARON	1151	
		BN2 ISLANDER	1152	
		C46 COMMANDO	1153	
		CARAVELL (SUD)	1154	
		CC109 (CANADAIR)	1155	
		CHALLENGER (CANADAIR)	1156	
		DHC2	1157	
		DHC6 TWIN OTTER	1158	
		DHC8	1159	
		EMB110 BANDEIRANTE	1160	
		EMB121	1161	
		FALCON 200/FALCON 20	1162	
		FALCON 50	1163	
		FALCON 900	1164	
		FH227 FRIENDSHIP	1165	
		FOKKER 100	1166	
		FOKKER 50	1167	
		FOKKER 60	1168	
		FOKKER 70	1169	
		GROB G850	1170	
		GULFSTREAM 1	1171	
		GULFSTREAM 2	1172	

FIELD CODING FOR J3.2C1

(SHEET 20)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		JETSTREAM	1173	
		JETSTREAM 31	1174	
		KING AIR	1175	
		L410 TURBOJET	1176	
		LEARJET 23	1177	
		LEARJET 24	1178	
		LEARJET 25 (IMPROVED VER	1179	
		28)		
		LEARJET 35/36	1180	
		LEARJET 55 (IMPROVED VER	1181	
		28)		
		LEARJET 60	1182	
		MERLIN 2	1183	
		MERLIN 3	1184	
		MERLIN 4	1185	
		METRO 3	1186	
		SAAB 2000	1187	
		SAAB 340	1188	
		SABRELINER	1189	
		U6 BEAVER	1190	
		VISCOUNT	1191	
		W3 SOKOL	1192	
		Y11 (HAMC)	1193	
		Y12 (HAMC)	1194	
		Y5	1195	
		CC-115 BUFFALO	1196	
		CC-130 HERCULES	1197	
		CC-150 POLARIS	1198	
		C-235 CASA	1199	
		CC-138 TWIN OTTER	1200	
		DO-228 LM (POLLUTION	1201	
		CONTROL)		
		UNDEFINED	1202 THROUGH 1277	
		LIGHT CIVIL	1278	
		TRANSPORT/AIRLINER	1279	
		GENERAL		

		HELICOPTERS		

		AH-1 COBRA	1280	
		AH-64 APACHE	1281	

5.1-628

MIL-STD-6016B

FIELD CODING FOR J3.2C1

(SHEET 21)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		CH-3 (SIKORSKY)	1282	
		CH-46 (SEA KNIGHT)	1283	
		CH-47 CHINOOK	1284	
		CH-53 SEA STALLION	1285	
		CH-54 LARKE (SKYCRANE)	1286	
		EH-60 QUICK FOX	1287	
		HH-1 IROQUOIS	1288	
		HH-2 SEA SPRITE	1289	
		HH-3 JOLLY GREEN	1290	
		HH-52 (SIKORSKY)	1291	
		HH-53 (SIKORSKY)	1292	
		OH-6 (HUGHES)	1293	
		OH-58 KIOWA	1294	
		RH-3 SEA KING	1295	
		RH-53 (SIKORSKY)	1296	
		SH-2 SEA SPRITE	1297	
		SH-3 SEA KING	1298	
		SH-60 SEA HAWK	1299	
		UH-1 IROQUOIS	1300	
		UH-2 SEA SPRITE	1301	
		UH-12 (HILLER)	1302	
		UH-46 (BOEING)	1303	
		UH-60 BLACK HAWK	1304	
		CH-2U	1305	
		HH-43	1306	
		A109 (AGUSTA)	1307	
		A129 MONGOOSE	1308	
		B0-105 (MBB)	1309	
		DISUSED	1310	
		CH-124 SEA KING	1311	
		DISUSED	1312 THROUGH 1314	
		SA 315 LAMA	1315	
		DISUSED	1316	
		DISUSED	1317	
		SA 321 SUPER FRELON	1318	
		SA 330 PUMA	1319	
		SA 332 SUPER PUMA	1320	
		S 342 GAZELLE	1321	
		SA 350 ASTAR	1322	
		SA 360 DAUPHIN	1323	
		SA 361 DAUPHIN	1324	
		WG-13 LYNX	1325	
		WG-34 (WESTLAND)	1326	

5.1-629

MIL-STD-6016B

FIELD CODING FOR J3.2C1

(SHEET 22)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		KA-18 HOG	1327	
		KA-20 HARP	1328	
		KA-25 HORMONE	1329	
		KA-26 HOODLUM	1330	
		MI-1 HARE	1331	
		MI-2 HOPLITE	1332	
		MI-4 HOUND	1333	
		MI-6 HOOK	1334	
		MI-8 HIP	1335	
		MI-10 HARKE	1336	
		MI-12 HOMER	1337	
		MI-14 HAZE	1338	
		MI-24 HIND	1339	
		MI-26 HALO	1340	
		CH-53E SUPER STALLION	1341	
		MH-53E SEA DRAGON	1342	
		HH-60 NIGHT HAWK	1343	
		HH-65A DOLPHIN	1344	
		KA-27 HELIX-A (ASW)	1345	
		KA-32 HELIX	1346	
		MI-17 HIP-H	1347	
		MI-28 HAVOC	1348	
		ECUREUIL/FENNEL/ESQILO	1349	
		KA-29 HELIX-B	1350	
		KA-50 HOKUM	1351	
		204 BELL	1352	
		205 BELL	1353	
		206 BELL	1354	
		214 BELL	1355	
		280 ENSTROM	1356	
		300 SCHWEIZER	1357	
		406 COMBAT SCOUT	1358	
		A 109 HIRUNDO	1359	
		A 129 MANGUSTA	1360	
		AH 6 CAYUSE	1361	
		ALOUETTE 2	1362	
		ALOUETTE 3	1363	
		AS 350 ECUREUIL	1364	
		AS 532 COUGAR	1365	
		AS 550 FENNEC	1366	
		AS 555 FENNEC	1367	
		AS 565 PANTHER	1368	
		CH 34 WESTLAND	1369	

5.1-630

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		EH 101	1370	
		HAS 1 WASP	1371	
		KA-28 HELIX A	1372	
		MD 500 DEFENDER	1373	
		MI 22	1374	
		MI 25	1375	
		MI 35	1376	
		MI 9	1377	
		SA 341 GAZELLE	1378	
		SA 342 GAZELLE	1379	
		SA 365 DAUPHIN 2	1380	
		TS11 ISKRA	1381	
		WESSEX	1382	
		Z9 (HARBIN)	1383	
		CH-146 GRIFFON	1384	
		SEA KING AEW (SKW)	1385	
		EH 101 MERLIN	1386	
		AB-212 AUGUSTA BELL	1387	
		BO-105 BOLKOW	1388	
		CH-47 CHINOOK	1389	
		HUGHES 500	1390	
		HUGHES 3000	1391	
		SH-3D SIKORSKY	1392	
		SH-70L SIKORSKY	1393	
		CH-113 LABRADOR	1394	
		NH 90 (C2)	1395	
		NH 90 (RECCE)	1396	
		NH 90 (EW/SEAD)	1397	
		NH 90 (TRANSPORT)	1398	
		SEA LYNX MK88A	1399	
		SEA KING MK41 (KWS)	1400	
		TIGER (HAP)	1401	
		NH 90 (NAVY)	1402	
		TIGER (HAC)	1403	
		SA 341 GAZELLE CANON	1404	
		AS 532 COUGAR HORIZON	1405	
		AW-520 SAR CORMORANT	1406	
		UNDEFINED	1407 THROUGH 1534	
		HELICOPTER GENERAL	1535	

		AIR-AIR MISSILES		

FIELD CODING FOR J3.2C1

(SHEET 24)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		AIM-4A FALCON	1536	
		AIM-7 SPARROW	1537	
		AIM-9 SIDEWINDER	1538	
		AIM-54 PHOENIX	1539	
		AIM-2A GENIE	1540	
		AIM-120 AMRAAM	1541	
		ASLAM	1542	
		R.530	1543	
		R.550 MAGIC	1544	
		S.530 SUPER 530	1545	
		ASPIDE	1546	
		DISUSED	1547	
		SHAFRIR	1548	
		SKY FLASH	1549	
		DISUSED	1550	
		AA-2 ATOLL	1551	
		AA-3 ANAB	1552	
		AA-5 ASH	1553	
		AA-6 ACRID	1554	
		AA-7 APEX	1555	
		AA-8 APHID	1556	
		AAM	1557	
		AA-9 AMOS	1558	
		AA-XP-1/2	1559	
		AQM-34	1560	
		AQM-91	1561	
		BGM-34 FIREBEE/MQM34	1562	
		YQM-94	1563	
		YQM-98	1564	
		AIM-132 ASRAAM	1565	
		MICA	1566	
		PL-2A	1567	
		PL-5B	1568	
		PL-7	1569	
		PL-9	1570	
		PYTHON 3	1571	
		PYTHON 4	1572	
		AA-10 ALAMO	1573	
		AA-11 ARCHER	1574	
		AA-12 ADDER	1575	
		AA-1 ALKALI	1576	
		AAM-1	1577	
		UNDEFINED	1578 THROUGH 1790	

5.1-632

MIL-STD-6016B

FIELD CODING FOR J3.2C1

(SHEET 25)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		AIR-TO-AIR MISSILE	1791	
		GENERAL		

		AIR-GROUND/GROUND-		
		GROUND MISSILES		

		AGM-45 SHRIKE	1792	
		AGM-65 MAVERICK	1793	
		AGM-69 SRAM	1794	
		AGM-78 STANDARD ARM	1795	
		AGM-84 HARPOON	1796	
		AGM-86 ALCM	1797	
		AGM-88 HARM	1798	
		AGM-109 TOMAHAWK	1799	
		AM 39 EXOCET	1800	
		AGM-119 PENGUIN	1801	
		AS 11 KILTER	1802	
		AS 12 KEGLER	1803	
		AS 15 KENT	1804	
		AS 30	1805	
		DISUSED	1806	
		RB 05	1807	
		RB 08	1808	
		ADVANCED ASM	1809	
		AS-1 KENNEL	1810	
		AS-2 KIPPER	1811	
		AS-3 KANGAROO	1812	
		AS-4 KITCHEN	1813	
		AS-5 KELT	1814	
		AS-6 KINGFISH	1815	
		AS-7 KERRY	1816	
		DISUSED	1817	
		AS-10 KAREN	1818	
		AS-9 KYLE	1819	
		AS 34 KORMORAN	1820	
		ASM GABRIEL	1821	
		ASM SEA SKUA	1822	
		ASM SEA EAGLE	1823	
		ASMP	1824	
		AT-2 SWATTER	1825	
		AT-3 SAGGER	1826	

5.1-633

MIL-STD-6016B

FIELD CODING FOR J3.2C1

(SHEET 26)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		AT-6 SPIRAL	1827	
		C-601	1828	
		C-611	1829	
		C-801	1830	
		C-802	1831	
		CSS-2	1832	
		CSS-3	1833	
		CSS-N-3	1834	
		CSS-X-4	1835	
		FL-2 SILKWORM	1836	
		FL-7	1837	
		HY-2	1838	
		HY-3	1839	
		M-9/11	1840	
		WS-1	1841	
		AS-13 KINGBOLT	1842	
		AS-14 KEDGE	1843	
		AS-16 KICKBACK	1844	
		AS-17 KRYPTON	1845	
		AS-18 KAZOO	1846	
		AT-4 SPIGOT	1847	
		AT-5 SPANDREL	1848	
		AT-7 SAXHORN	1849	
		AT-10 STABBER	1850	
		AT-11 SNIPER	1851	
		AT-12	1852	
		AT-13	1853	
		AT-14	1854	
		FROG-7	1855	
		SS-1 SCUD	1856	
		SS-11 SEGO	1857	
		SS-13 SAVAGE	1858	
		SS-18 SATAN	1859	
		SS-19 STILETTO	1860	
		SS-24 SCALPEL	1861	
		SS-25 SICKLE	1862	
		SS-N-2 STYX	1863	
		SS-N-3 SHADDOCK	1864	
		SS-N-6 SERB	1865	
		SS-N-7 STARBRIGHT	1866	
		SS-N-8 SAWFLY	1867	
		SS-N-9 SIREN	1868	
		SS-N-12 SANDBOX	1869	

5.1-634

MIL-STD-6016B

FIELD CODING FOR J3.2C1

(SHEET 27)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		SS-N-18 STINGRAY	1870	
		SS-N-19 SHIPWRECK	1871	
		SS-N-20 STURGEON	1872	
		SS-N-21 SAMPSON	1873	
		SS-N-22 SUNBURN	1874	
		SS-N-23 SKIFF	1875	
		SS-N-26	1876	
		AGNI	1877	
		PRITHVI	1878	
		TOW	1879	
		AGM-114 HELLFIRE	1880	
		MLRS	1881	
		HOT	1882	
		MILAN	1883	
		TRIGAT	1884	
		OTOMAT	1885	
		RBS-15M	1886	
		ARMAT	1887	
		ALARM	1888	
		AGM-12 BULLPUP	1889	
		AGM-62A WALLEYE	1890	
		AGM-123A SKIPPER II	1891	
		APACHE (ASM)	1892	
		AS 8	1893	
		AT-1 SWATTER	1894	
		CAS1	1895	
		KH-41 MOSKIT	1896	
		MARTIN PESCADOR	1897	
		MAS1 CARCARA	1898	
		RB 04E	1899	
		STAR	1900	
		SEA INDIGO	1901	
		MM 38	1902	
		MM 40	1903	
		SM 39	1904	
		AS 34 KORMORAN II	1905	
		UNDEFINED	1906 THROUGH 2046	
		AIR-GROUND MISSILE	2047	
		GENERAL		

		SURFACE TO AIR MISSILES		

5.1-635

MIL-STD-6016B

FIELD CODING FOR J3.2C1

(SHEET 28)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		FIM-92 STINGER	2048	
		NIM-23 HAWK	2049	
		MIM-42 REDEYE	2050	
		MIM-72 CHAPARRAL	2051	
		MIM-104 PATRIOT	2052	
		RIM-2 TERRIER	2053	
		RIM-7 SEA SPARROW	2054	
		RIM-8 TALOS	2055	
		RIM-24 TARTAR	2056	
		RIM-66 STANDARD MISSILE	2057	
		RIM-67 STANDARD MISSILE	2058	
		BLOWPIPE	2059	
		DISUSED	2060 THROUGH 2061	
		SEA DART	2062	
		DISUSED	2063	
		SEA WOLF	2064	
		S 440 CROTALE EDIR	2065	
		RAPIER	2066	
		RBS-70 (SLM)	2067	
		DISUSED	2068	
		SAM ROLAND	2069	
		SA-2 GUIDELINE	2070	
		SA-3 GOA	2071	
		SA-4 GANEF	2072	
		SA-N-3 GOBLET	2073	
		SA-5 GAMMON	2074	
		SA-N-4 GECKO	2075	
		SA-6 GAINFUL	2076	
		SA-N-6 GRUMBLE	2077	
		SA-7 GRAIL	2078	
		SA-8 GECKO	2079	
		SA-9 GASKIN	2080	
		SA-10 GRUMBLE	2081	
		SA-11 GADFLY	2082	
		SA-12	2083	
		SA-13 GOPHER	2084	
		MISTRAL	2085	
		SA-N-7 GADFLY	2086	
		SA-N-8 GREMLIN	2087	
		SA-14 GREMLIN	2088	
		SA-16 GIMLET	2089	
		SA-X-17	2090	
		SA-N-5 GRAIL	2091	

FIELD CODING FOR J3.2C1

(SHEET 29)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		SA-N-11 GRISOM	2092	
		SA-12A GLADIATOR	2093	
		SA-12B GIANT	2094	
		SA-14 GREMLIN	2095	
		SA-15 GAUNTLET	2096	
		SA-17 GRIZZLY	2097	
		SA-N-12 GRIZZLY	2098	
		SA-18 GROUSE	2099	
		SA-19 GRISOM	2100	
		RIM-116 RAM	2101	
		ADATS	2102	
		JAVELIN	2103	
		STARBURST	2104	
		STARSTREAK	2105	
		ASPIDE	2106	
		I-HAWK	2107	
		ROLAND II	2108	
		SM-2 BLOCK II	2109	
		SM-2 BLOCK III	2110	
		SM-2 BLOCK IIIA	2111	
		SM-2 BLOCK IIIB	2112	
		SM-2 BLOCK IV	2113	
		SM-2 BLOCK IVA	2114	
		SM-3 LEAP	2115	
		AKASH	2116	
		ANZA	2117	
		ANZA II	2118	
		CSA-1	2119	
		CSA-2	2120	
		CSA-4	2121	
		CSA-5	2122	
		FM-80	2123	
		HN-5	2124	
		NK-7	2125	
		NK-16	2126	
		PANTZYR	2127	
		RAPIER 2000/JERNAS	2128	
		RBS-90	2129	
		SAKR	2130	
		SAVA	2131	
		SHANINE	2132	
		SKYGUARD ASPIDE	2133	
		SPADA	2134	

FIELD CODING FOR J3.2C1

(SHEET 30)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE -----	(CONTINUED)	
		TAM SAM	2135	
		TIGERCAT	2136	
		VANGUARD	2137	
		SA-N-1 GOA	2138	
		SA-N-9 GAUNTLET	2139	
		SA-N-10	2140	
		ALBATROS/ASPID	2141	
		SM-1	2142	
		VT1 CROTALE	2143	
		MASURCA	2144	
		ASTER 15	2145	
		ASTER 30	2146	
		UNDEFINED	2147 THROUGH 4093	
		RESET TO NO STATEMENT	4094	
		SURFACE-TO-AIR MISSILE GENERAL	4095	
797	004	MINUTE -----		THE MINUTE OF THE HOUR.
		0 THROUGH 59	0 THROUGH 59	IN ONE MINUTE INCREMENTS.
		ILLEGAL	60 THROUGH 62	
		NO STATEMENT	63	
792	001	HOUR ----		EXPRESSES TIME OF DAY OR A PERIOD OF TIME IN HOURS.
		0 HOUR	0	
		1 THROUGH 23 HOURS	1 THROUGH 23	IN ONE HOUR INCREMENTS.
		ILLEGAL	24 THROUGH 30	
		NO STATEMENT	31	

5.1-638

MIL-STD-6016B

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: AIR TRAFFIC CONTROL CALLSIGN CONTINUATION WORD

< - - -

49 48 47 46 45 44 43 42 41 40 39 38 37 36 35 34 33 32 31 30 29 28 27 26 25

CALLSIGN, PUBLISHED

.....

60 60 67 66 65 64 63 62 61 60 59 59 57 56 55 54 53 52 51 50

: 9 :

WORD DESCRIPTION

WORD NUMBER: J3.2C4

WORD TITLE: AIR TRAFFIC CONTROL CALLSIGN CONTINUATION WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	00100
1850 002	CALLSIGN, PUBLISHED	7-	60 54	
756 009	SPARE	61-	69 9	

FIELD CODING FOR J3.2C4

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

1850	002	CALLSIGN, PUBLISHED		
------	-----	---------------------	--	--

CALLSIGN, PUBLISHED

THE 54 BITS ARE DIVIDED INTO NINE
GROUPS OF SIX BITS. EACH GROUP IS
INTERPRETED INDEPENDENTLY IN
ACCORDANCE WITH THE FOLLOWING
CODE:

BLANK	0
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
A	10
B	11
C	12
D	13
E	14
F	15
G	16
H	17
I	18
J	19
K	20
L	21
M	22
N	23
O	24
P	25
Q	26
R	27
S	28
T	29
U	30
V	31
W	32
X	33
Y	34
Z	35
UNDEFINED	36 THROUGH 62
ZERO	63

MIL-STD-6016B

J3.3 MESSAGE SUMMARY

PURPOSE

The J3.3 Surface (Maritime) Track message is used to exchange information on surface (maritime) tracks.

DATA ELEMENT SUMMARY

<u>J3.3I</u>		<u>J3.3C1 (Continued)</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	MODE IV INDICATOR	2
LABEL, J-SERIES	5	PPLI IFF/SIF INDICATOR	2
SUBLABEL, J-SERIES	3	SURFACE (MARITIME) PLATFORM	6
MESSAGE LENGTH INDICATOR	3	SURFACE (MARITIME) PLATFORM	7
EXERCISE INDICATOR	1	ACTIVITY	
PPLI TRACK NUMBER AND IDENTITY	1	SPARE	5
INDICATOR		MINUTE	6
FORCE TELL INDICATOR	1	HOUR	5
EMERGENCY INDICATOR	1		
SPECIAL PROCESSING INDICATOR	1		
SIMULATION INDICATOR	1		
TRACK NUMBER, REFERENCE	19		
STRENGTH	4		
SURFACE (MARITIME) SPECIFIC	12		
TYPE			
SPARE	3		
IDENTITY DIFFERENCE INDICATOR	1		
TRACK QUALITY	4		
IDENTITY CONFIDENCE	4		
IDENTITY(3)*****			
IDENTITY AMPLIFYING	*		
DESCRIPTOR(3)*****	3		
SPECIAL INTEREST INDICATOR	1		

<u>J3.3E0</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
SPARE	2
LATITUDE, 0.0051 MINUTE	21
DISUSED	1
SPARE	1
LONGITUDE, 0.0051 MINUTE	22
PASSIVE/ACTIVE INDICATOR	1
COURSE	9
SPEED	11

<u>J3.3C1</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
CONTINUATION WORD LABEL	5
SPARE	1
MODE I CODE	5
MODE II CODE	12
MODE III CODE	12

J3.3 TRANSMIT/RECEIVE RULES

TITLE: Surface (Maritime) Track Message

TRANSMIT RULES

1. The J3.3B Surface (Maritime) Track basic message consists of the J3.3I Surface (Maritime) Track initial word and the J3.3E0 Surface (Maritime) Track extension word. The J3.3B basic message shall be transmitted once by the JU with R^2 :

- a. When reporting a new surface (maritime) track on the interface.
- b. When assuming R^2 of a surface (maritime) track.
- c. When a track alert is initiated on the surface (maritime) track.
- d. Periodically at an RRN = 6 (12 seconds, 8-20 second interval) for real-time surface (maritime) tracks.
- e. Periodically at an RRN = 4 (48 seconds, 36-60 second interval) for nonreal-time surface (maritime) tracks.
- f. When data elements other than Course, Speed, and/or Latitude/Longitude change for real-time surface (maritime) tracks.
- g. When any data element changes for nonreal-time surface (maritime) tracks.
- h. When a J7.1 (ACT = 1) Data Update Request by Track Number message is received on the surface (maritime) track.
- i. When J2.3 Surface (Maritime) PPLI messages are no longer being received on a track for which local sensor data exists, in accordance with paragraph 4.4.2.2.1.
- j. When a J7.5 (ACT = 2) IFF/SIF update request message is received on the surface (maritime) track.

J3.3 TRANSMIT/RECEIVE RULES (Continued)

TRANSMIT RULES (Continued)

k. When any IFF/SIF data are changed from No Data status (zero) to Valid Data status (nonzero) or from Valid Data to other Valid Data.

l. When transmission of IFF/SIF data is required by Table 4.7-8.

2. The J3.3C1 Surface (Maritime) Track Amplification continuation word shall be transmitted by the JU with R²:

a. The same as a, b, c, h, i, k and l above if any data elements in the J3.3C1 word are held for real-time surface (maritime) tracks.

b. At the next periodic transmission of the basic message when any data in the J3.3C1 word changes, other than IFF/SIF data.

c. Every 8 transmissions of the J3.3B basic message for real-time surface (maritime) tracks, if any data elements in the J3.3C1 word are held.

d. With each nonreal-time surface (maritime) track message.

e. When a J7.5 (ACT = 2) message is received on the surface (maritime) track regardless of the No Data or Valid Data status of data held.

3. The J3.3C2 Surface (Maritime) Track Amplification continuation word shall be transmitted, if any data elements in the J3.3C2 word are held, by the JU with R²:

a. The same as 1a, b, c, h, i, k and l above.

b. At the next periodic transmission of the basic message when any data in the J3.3C2 word changes.

c. Every 8(1-16, 1) transmissions of the J3.3B basic message for real-time surface (maritime) tracks.

MIL-STD-6016B

J3.3 TRANSMIT/RECEIVE RULES (Continued)

TRANSMIT RULES (Continued)

- d. With each nonreal-time surface (maritime) track message.
 - e. When a J7.5 (ACT = 2) message is received on the surface (maritime) track.
4. When both the J3.3C1 and J3.3C2 words are required to be transmitted, and only three words are allowed in a time slot, a J3.3I/J3.3E0/J3.3C1 word sequence followed by a J3.3I/J3.3E0/J3.3C2 word sequence shall be transmitted.
5. The J3.3 messages on the specified surface (maritime) track shall cease being transmitted upon receipt of a J2.3 PPLI message from the unit being reported once the TN correlation has been completed. Additional criteria regarding the priority/management of J2.3 or J3.3 messages is contained in paragraph 4.3 and 4.4.

RECEIVE RULES

There are no receive rules specified for this message.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD TITLE: SURFACE (MARITIME) TRACK INITIAL WORD

<---

SURFACE (MARITIME) SPECIFIC
TYPE

: : IDENTITY

```

:SI :-----:  IDENTITY  : TRACK QUALITY :ID :  SPARE  :

```

```

: TND:  TD AMP      : CONFIDENCE      :                : DTE:                :

```

WORD DESCRIPTION

WORD NUMBER: J3.3I

WORD TITLE: SURFACE (MARITIME) TRACK INITIAL WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	00
270	004	LABEL, J-SERIES	2-	6 5	00011
271	005	SUBLABEL, J-SERIES	7-	9 3	011
800	001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
385	003	EXERCISE INDICATOR (EX IND)	13	1	
839	001	PPLI TRACK NUMBER AND IDENTITY INDICATOR (PP T/I)	14	1	
354	002	FORCE TELL INDICATOR (FT IND)	15	1	
355	002	EMERGENCY INDICATOR (EMG IND)	16	1	
292	002	SPECIAL PROCESSING INDICATOR (SPI)	17	1	
1604	001	SIMULATION INDICATOR (SIM IND)	18	1	
769	002	TRACK NUMBER, REFERENCE	19-	37 19	
386	013	STRENGTH	38-	41 4	
808	001	SURFACE (MARITIME) SPECIFIC TYPE	42-	53 12	
756	003	SPARE	54-	56 3	
1860	001	IDENTITY DIFFERENCE INDICATOR (ID DIF)	57	1	
280	001	TRACK QUALITY	58-	61 4	
1663	001	IDENTITY CONFIDENCE (ID CON)	62-	65 4	
376	007	IDENTITY	66-	68 3	
376	001	IDENTITY AMPLIFYING DESCRIPTOR (ID AMP DESCR)	66-	68 3	
1861	001	SPECIAL INTEREST INDICATOR (SI IND)	69	1	

FIELD CODING FOR J3.3I

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
385	003	EXERCISE INDICATOR -----		INDICATES WHETHER OR NOT THE MESSAGE IDENTIFIES AN EXERCISE TRACK.
		NON-EXERCISE TRACK	0	
		EXERCISE TRACK OR UNIT	1	
839	001	PPLI TRACK NUMBER AND IDENTITY INDICATOR -----		INDICATES WHETHER OR NOT THE REFERENCE TN AND IDENTITY IN THIS MESSAGE WAS RECEIVED PREVIOUSLY IN A PPLI MESSAGE.
		NO STATEMENT	0	
		SOURCE OF TN AND IDENTITY IS FROM PPLI	1	INDICATES THAT THE REFERENCE TN AND IDENTITY IN THIS MESSAGE WAS RECEIVED IN A PPLI MESSAGE.
354	002	FORCE TELL INDICATOR -----		THIS INDICATOR CAUSES TRACK/POINT DATA TO BE FORCED THROUGH CONTROLLABLE RECEIVE FILTERS.
		NO STATEMENT	0	
		FORCE TELL STATUS	1	
355	002	EMERGENCY INDICATOR -----		USED TO INDICATE WHETHER OR NOT A UNIT OR TRACK HAS AN EMERGENCY.
		NO STATEMENT	0	
		EMERGENCY STATUS	1	
292	002	SPECIAL PROCESSING INDICATOR -----		INDICATES THAT A MESSAGE REQUIRES SPECIAL PROCESSING.
		SPECIAL PROCESSING NOT REQUIRED	0	
		SPECIAL PROCESSING REQUIRED	1	
1604	001	SIMULATION INDICATOR -----		INDICATES WHETHER THE TRACK REFERENCED IN THE MESSAGE IS A REAL OR A SIMULATED TRACK.
		REAL TRACK OR UNIT	0	
		SIMULATED TRACK OR UNIT	1	
769	002	TRACK NUMBER, REFERENCE -----		A REFERENCE NUMBER USED TO ASSOCIATE INFORMATION AND DIRECTIVES WITH THE TRACK. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH

5.1-650

MIL-STD-6016B

FIELD CODING FOR J3.3I (SHEET 2)				
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	

FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE-BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANNN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6
00111	7
01000	A
01001	B
01010	C
01011	D
01100	E
01101	F
01110	G
01111	H
10000	J
10001	K
10010	L
10011	M
10100	N

FIELD CODING FOR J3.3I			(SHEET 3)
DFI	DUI	DUI/DI NAME	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)
			10101 P
			10110 Q
			10111 R
			11000 S
			11001 T
			11010 U
			11011 V
			11100 W
			11101 X
			11110 Y
			11111 Z
		00000	0
		00001-00076	1 THROUGH 62
		00077	63
		00100-00175	64 THROUGH 125
		00176	126
		00177	127
		00200-07776	128 THROUGH 4094
		07777	4095
		0A000-0Z777	4096 THROUGH 16383
		10000-17777	16384 THROUGH 20479
		1A000-1Z777	20480 THROUGH 32767
		20000-27777	32768 THROUGH 36863
			NO STATEMENT.
			ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU). ILLEGAL.
			ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU). RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS. COLLECTIVE ADDRESS.
			ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
			ILLEGAL.
			ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
			ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
			ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
			ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G.,

			FIELD CODING FOR J3.3I	(SHEET 4)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		2A000-2Z777	36864 THROUGH 49151	TRACKS AND REFERENCE POINTS. ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		70000-77776	114688 THROUGH 118782	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO

FIELD CODING FOR J3.3I				(SHEET 5)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		77777	118783	C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS. ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
386	013	STRENGTH -----		EXPRESSES THE NUMBER OF ENTITIES REPRESENTED BY A SINGLE TRACK.
		NO STATEMENT	0	
		1 UNIT	1	
		2 UNITS	2	
		3 UNITS	3	
		4 UNITS	4	
		5 UNITS	5	
		6 UNITS	6	
		7 UNITS	7	
		8 UNITS	8	
		9 UNITS	9	
		10 UNITS	10	
		11 UNITS	11	
		12 UNITS	12	
		2 THROUGH 7 (FEW) UNITS	13	
		GREATER THAN 7 (MANY) UNITS	14	
		GREATER THAN 12 UNITS	15	
1860	001	IDENTITY DIFFERENCE INDICATOR -----		THE IDENTITY DIFFERENCE INDICATOR IS USED TO INDICATE THAT A CONFLICT IN THE IDENTITY OF THE TRACK/REFERENCE TN IS CURRENTLY BEING EVALUATED BY THE UNIT WITH REPORTING RESPONSIBILITY.
		NO STATEMENT	0	NO IDENTITY DIFFERENCE EXISTS ON REFERENCE TN AT THIS TIME, OR PREVIOUS CONFLICT HAS BEEN RESOLVED.
		IDENTITY DIFFERENCE	1	AN IDENTITY DIFFERENCE EXISTS ON REFERENCE TN. THE IDENTITY BEING REPORTED IS THE LATEST

FIELD CODING FOR J3.3I

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1860	001	IDENTITY DIFFERENCE INDICATOR -----	(CONTINUED)	IDENTITY LOCALLY HELD BY THE UNIT WITH REPORTING RESPONSIBILITY PRIOR TO THE CONFLICT, NOT THE CONFLICTING IDENTITY CURRENTLY UNDER OPERATOR EVALUATION.
280	001	TRACK QUALITY -----		THE TRACK QUALITY IS STATED AS A NUMERICAL VALUE FROM 1 TO 15 WITH THE HIGHER VALUES INDICATING THE HIGHER TRACK QUALITIES. THE TQ IS BASED ON THE POSITIONAL ACCURACY OF A TRACK REPRESENTED BY AN AREA IN SQUARE DATA MILES WITHIN WHICH IT IS ASSESSED THAT THERE IS A 95% PROBABILITY THAT THE TRACK LIES.
		NON REAL-TIME TRACK	0	A TRACK REPORT IS IDENTIFIED AS A NONREAL-TIME REPORT WITH TQ = 0 IF ANY OF THE FOLLOWING CONDITIONS ARE TRUE: THE TRACK DATA ORIGINATE FROM OTHER THAN A TDS OR JTIDS/MIDS EQUIPPED AIRCRAFT; THE TRACK DATA HAVE BEEN RELAYED FROM ANOTHER SYSTEM BY OTHER THAN A REAL-TIME DATA LINK INTERFACE; THE TRACK DATA HAVE BEEN DERIVED FROM OTHER THAN INTEGRATED SENSORS.
		> 2,755 SQUARE DATA MILES	1	
		EQUAL TO OR < 2,755 SQUARE DATA MILES	2	
		EQUAL TO OR < 686 SQUARE DATA MILES	3	
		EQUAL TO OR < 439 SQUARE DATA MILES	4	
		EQUAL TO OR < 247 SQUARE DATA MILES	5	
		EQUAL TO OR < 110 SQUARE DATA MILES	6	
		EQUAL TO OR < 27.0 SQUARE DATA MILES	7	
		EQUAL TO OR < 4.4 SQUARE DATA MILES	8	

FIELD CODING FOR J3.3I

(SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
280	001	TRACK QUALITY -----	(CONTINUED)	
		EQUAL TO OR < 1.10 SQUARE DATA MILES	9	
		EQUAL TO OR < 0.0281 SQUARE DATA MILES	10	
		EQUAL TO OR < 0.0070 SQUARE DATA MILES	11	
		EQUAL TO OR < 0.0018 SQUARE DATA MILES	12	
		EQUAL TO OR < 0.0004 SQUARE DATA MILES	13	
		EQUAL TO OR < 0.0001 SQUARE DATA MILES	14	
		EQUAL TO OR < 0.00003 SQUARE DATA MILES	15	
1663	001	IDENTITY CONFIDENCE -----		
		UNDEFINED	0 THROUGH 15	
376	007	IDENTITY -----		EXPRESSES THE STANDARD IDENTITY OF A TRACK.
		PENDING	0	A TRACK WHICH HAS NOT BEEN SUBJECTED TO THE IDENTIFICATION PROCESS.
		UNKNOWN	1	AN EVALUATED TRACK WHICH HAS NOT BEEN IDENTIFIED.
		ASSUMED FRIEND	2	A TRACK WHICH IS ASSUMED TO BE A FRIEND BECAUSE OF ITS CHARACTERISTICS, BEHAVIOR, OR ORIGIN.
		FRIEND	3	A TRACK BELONGING TO A DECLARED FRIENDLY NATION.
		NEUTRAL	4	A TRACK WHOSE CHARACTERISTICS, BEHAVIOR, ORIGIN, OR NATIONALITY INDICATE THAT IT IS NEITHER SUPPORTING NOR OPPOSING FRIENDLY FORCES.
		SUSPECT	5	A TRACK WHICH IS POTENTIALLY HOSTILE BECAUSE OF ITS CHARACTERISTICS, BEHAVIOR, ORIGIN, OR NATIONALITY.
		HOSTILE	6	A TRACK DECLARED TO BELONG TO ANY OPPOSING NATION, PARTY, GROUP, OR ENTITY, WHICH BY VIRTUE OF ITS BEHAVIOR OR INFORMATION COLLECTED

FIELD CODING FOR J3.3I				(SHEET 8)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
376	007	IDENTITY -----	(CONTINUED)	
		UNDEFINED	7	ON IT SUCH AS CHARACTERISTICS, ORIGIN OR NATIONALITY CONTRIBUTES TO THE THREAT TO FRIENDLY FORCES.
376	001	IDENTITY AMPLIFYING DESCRIPTOR -----		A DESCRIPTOR ADDING TO THE STANDARD IDENTITY OF A TRACK INVOLVED IN AN EXERCISE. THE STANDARD IDENTITY IS FRIEND.
		EXERCISE PENDING	0	
		EXERCISE UNKNOWN	1	
		EXERCISE ASSUMED FRIEND	2	
		EXERCISE FRIEND	3	
		EXERCISE NEUTRAL	4	
		JOKER	5	
		FAKER	6	
		UNDEFINED	7	
1861	001	SPECIAL INTEREST INDICATOR -----		THE SPECIAL INTEREST INDICATOR IS USED TO INDICATE THAT THE TRACK IS OF SPECIAL INTEREST.
		NO STATEMENT	0	
		SPECIAL INTEREST	1	THE REFERENCE TN IS OF SPECIAL INTEREST. (A.) IF THIS FIELD IS SET TO ONE AND THE IDENTITY IS FRIEND THIS TRACK IS DEFINED AS A "KILO". (B.) IF THIS FIELD IS SET TO ONE AND THE TRACK ENVIRONMENT/CATEGORY IS AIR AND THE IDENTITY IS SUSPECT, THE TRACK IS DEFINED AS A "ZOMBIE". (C.) IF THIS FIELD IS SET TO ONE AND THE TRACK ENVIRONMENT/CATEGORY IS SURFACE (MARITIME) AND THE IDENTITY IS SUSPECT, THE TRACK IS DEFINED AS A "TRAVELLER". (D.) THE USE OF THIS INDICATOR WITH OTHER IDENTITIES IS YET TO BE DETERMINED.

.....

WORD TITLE: SURFACE (MARITIME) TRACK EXTENSION WORD

```

: 49: 48 47 46 45 44 43 42 41 40 39 38 37 36 35 34 33 32 31 30 29 28 27: 26: 25:
: PAS:
: ACT: LONGITUDE, 0.0051 MINUTE : SP : DUD:
: : :
: 1 : 22 : 1 : 1 :

```

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50	:		
:												:											:
:	SPEED											:	COURSE										:
:												:											:
:	11											:	9										:

WORD DESCRIPTION

WORD NUMBER: J3.3E0
WORD TITLE: SURFACE (MARITIME) TRACK EXTENSION WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	10
756 002	SPARE (SP)	2-	3 2	
281 014	LATITUDE, 0.0051 MINUTE	4-	24 21	
758 001	DISUSED (DUD)	25	1	
756 001	SPARE (SP)	26	1	
282 014	LONGITUDE, 0.0051 MINUTE	27-	48 22	
892 001	PASSIVE/ACTIVE INDICATOR (PAS ACT)	49	1	
371 015	COURSE	50-	58 9	
367 018	SPEED	59-	69 11	

FIELD CODING FOR J3.3E0

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
281	014	LATITUDE, 0.0051 MINUTE -----		THE PRECISION IS APPROXIMATELY 31 FEET. IN 90/1,048,575 DEGREE INCREMENTS.
		0 DEGREES	0	
		+90/1,048,575 THROUGH +90 DEGREES NORTH	1 THROUGH 1048575	
		NO STATEMENT	1048576	
		-90 THROUGH -90/1,048,575 DEGREES SOUTH	1048577 THROUGH 2097151	
282	014	LONGITUDE, 0.0051 MINUTE -----		THE PRECISION IS APPROXIMATELY 31 FEET. IN 180/2,097,151 DEGREE INCREMENTS.
		0 DEGREES	0	
		+180/2,097,151 THROUGH +180 DEGREES EAST	1 THROUGH 2097151	
		NO STATEMENT	2097152	
		-180 THROUGH -180/2,097,151 DEGREES WEST	2097153 THROUGH 4194303	
892	001	PASSIVE/ACTIVE INDICATOR -----		THIS INDICATOR IDENTIFIES THE TYPE OF SENSOR AS EITHER PASSIVE OR ACTIVE. DATA BEING REPORTED WAS DERIVED FROM A PASSIVE SENSOR SYSTEM.
		PASSIVE	0	
		ACTIVE	1	DATA BEING REPORTED WAS DERIVED FROM AN ACTIVE SENSOR SYSTEM.
371	015	COURSE -----		INDICATES THE DIRECTION OF TRAVEL OF AN OBJECT IN DEGREES WITH RESPECT TO TRUE NORTH. IN 1 DEGREE INCREMENTS.
		0 THROUGH 359 DEGREES	0 THROUGH 359	
		ILLEGAL	360 THROUGH 510	
		NO STATEMENT	511	
367	018	SPEED -----		THE RATE OF CHANGE OF POSITION. EXPRESSES GROUND SPEED IN 2 DATA MILES PER HOUR INCREMENTS.
		0 THROUGH 4092 DATA MILES PER HOUR	0 THROUGH 2046	
		NO STATEMENT	2047	

5.1-660

MIL-STD-6016B

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: SURFACE (MARITIME) TRACK AMPLIFICATION CONTINUATION WORD

:	24	23	22	21	20	19	18	17	16	15	14	13:	12	11	10	09	08:	07:	06	05	04	03	02:	01	00:				
:													:						:	:	CONTINUATION WORD					:	WORD	:	
:	MODE II CODE												:	MODE I CODE					:	SP	:	LABEL					:	FORMAT	:
:													:						:	:						:	:	:	
:	12												:	5					:	1	:	5					:	2	:

49	48	47:	46	45	44	43	42	41:	40	39:	38	37:	36	35	34	33	32	31	30	29	28	27	26	25:		
<---			:	SURFACE (MARITIME)					:	PP IFF		:	M4 IND		:	MODE III CODE										:
			:	PLATFORM					:			:			:											:
			:						:			:			:											:
			:	6					:	2		:	2		:	12										:

:	69	68	67	66	65:	64	63	62	61	60	59:	58	57	56	55	54:	53	52	51	50		
:	HOUR					:	MINUTE					:	SPARE					:	SURFACE (MARITIME) PLATFORM ACTIVITY			
:	5					:	6					:	5					:	7			

WORD DESCRIPTION

WORD NUMBER: J3.3C1

WORD TITLE: SURFACE (MARITIME) TRACK AMPLIFICATION CONTINUATION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550 001		WORD FORMAT	0-	1 2	01
1551 001		CONTINUATION WORD LABEL	2-	6 5	00001
756 001		SPARE (SP)	7	1	
293 003		MODE I CODE	8-	12 5	SEE NOTE 1.
294 002		MODE II CODE	13-	24 12	SEE NOTE 1.
295 002		MODE III CODE	25-	36 12	SEE NOTE 1.
298 001		MODE IV INDICATOR (M4 IND)	37-	38 2	SEE NOTE 1.
839 002		PPLI IFF/SIF INDICATOR (PP IFF)	39-	40 2	
1797 002		SURFACE (MARITIME) PLATFORM	41-	46 6	
1798 002		SURFACE (MARITIME) PLATFORM ACTIVITY	47-	53 7	
756 005		SPARE	54-	58 5	
797 004		MINUTE	59-	64 6	
792 001		HOUR	65-	69 5	

FIELD CODING FOR J3.3C1

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
293	003	MODE I CODE -----		PROVIDES MODE I BEACON REPLY INFORMATION. WITHIN THE MODE FIELD, SIF CODES ARE IN THE ORDER A4 A2 A1 B2 B1. THE LEAST SIGNIFICANT DIGIT CANNOT BE GREATER THAN 3. THIS CODE CANNOT BE ASSIGNED AS AN OPERATIONAL CODE. INDICATES THERE ARE NO DATA FOR TRANSMISSION.
		0 (NO STATEMENT)	00 (OCTAL)	
		1	01 (OCTAL)	
		2	02 (OCTAL)	
		3	03 (OCTAL)	
		4	10 (OCTAL)	
		5	11 (OCTAL)	
		6	12 (OCTAL)	
		7	13 (OCTAL)	
		8	20 (OCTAL)	
		9	21 (OCTAL)	
		10	22 (OCTAL)	
		11	23 (OCTAL)	
		12	30 (OCTAL)	
		13	31 (OCTAL)	
		14	32 (OCTAL)	
		15	33 (OCTAL)	
		16	40 (OCTAL)	
		17	41 (OCTAL)	
		18	42 (OCTAL)	
		19	43 (OCTAL)	
		20	50 (OCTAL)	
		21	51 (OCTAL)	
		22	52 (OCTAL)	
		23	53 (OCTAL)	
		24	60 (OCTAL)	
		25	61 (OCTAL)	
		26	62 (OCTAL)	
		27	63 (OCTAL)	
		28	70 (OCTAL)	
		29	71 (OCTAL)	
		30	72 (OCTAL)	
		31	73 (OCTAL)	
294	002	MODE II CODE -----		PROVIDES MODE II BEACON REPLY INFORMATION. THIS CODE CANNOT BE ASSIGNED AS AN OPERATIONAL CODE. INDICATES THERE
		NO STATEMENT	0	

FIELD CODING FOR J3.3C1

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
294	002	MODE II CODE -----	(CONTINUED)	
		1 THROUGH 7777 (OCTAL)	0001 THROUGH 7777 (OCTAL)	ARE NO DATA FOR TRANSMISSION. WITHIN THE FIELD, SIF CODES ARE IN THE ORDER A, B, C, D WITH EACH TRIAD IN THE ORDER 4, 2, 1.
295	002	MODE III CODE -----		PROVIDES MODE III BEACON REPLY INFORMATION.
		NO STATEMENT	0	THIS CODE CANNOT BE ASSIGNED AS AN OPERATIONAL CODE. INDICATES THERE ARE NO DATA FOR TRANSMISSION.
		1 THROUGH 7777 (OCTAL)	0001 THROUGH 7777 (OCTAL)	WITHIN THE FIELD, SIF CODES ARE IN THE ORDER A, B, C, D WITH EACH TRIAD IN THE ORDER 4, 2, 1.
298	001	MODE IV INDICATOR -----		THE MODE IV BEACON REPLY.
		NOT INTERROGATED/NO STATEMENT	0	
		INTERROGATED, NO RESPONSE	1	
		INTERROGATED, INVALID RESPONSE	2	
		INTERROGATED, VALID RESPONSE	3	
839	002	PPLI IFF/SIF INDICATOR -----		INDICATES WHETHER OR NOT THE IFF/SIF DATA IN THIS MESSAGE WAS RECEIVED PREVIOUSLY IN A PPLI MESSAGE.
		NO STATEMENT	0	
		SOURCE OF MODE II CODE IS FROM PPLI	1	THE MODE II CODE IN THIS MESSAGE WAS RECEIVED PREVIOUSLY IN A PPLI MESSAGE.
		SOURCE OF ALL IFF DATA IS FROM PPLI	2	ALL IFF/SIF DATA IN THIS MESSAGE WAS RECEIVED PREVIOUSLY IN A PPLI MESSAGE.
		UNDEFINED	3	
1797	002	SURFACE (MARITIME) PLATFORM -----		THE SURFACE (MARITIME) PLATFORM FIELD ALONG WITH THE SURFACE (MAR- ITIME) PLATFORM ACTIVITY FIELD FURTHER DEFINES THE IDENTITY OF A SURFACE (MARITIME) TRACK.
		NO STATEMENT	0	

5.1-665

MIL-STD-6016B

FIELD CODING FOR J3.3C1

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1797	002	SURFACE (MARITIME) PLATFORM	(CONTINUED)	

		AIRCRAFT CARRIER (CV)	1	
		BATTLESHIP	2	
		CRUISER	3	
		DESTROYER	4	
		FRIGATE	5	
		FAST PATROL BOAT	6	
		AMPHIBIOUS	7	
		LHA/LHD	8	
		AMPHIBIOUS ASSAULT	9	
		COMMAND SHIP (LCC)		
		LANDING CRAFT (LC)	10	
		TROOP SHIP	11	
		TANKER/OILER	12	
		AUXILIARY SHIP	13	
		MINE WARFARE SHIP	14	
		MINE COUNTERMEASURES	15	
		MARITIME VESSEL (MCMV)		
		HOSPITAL SHIP	16	
		SURFACED SUBMARINE	17	
		HYDROFOIL	18	
		AIR CUSHION VEHICLE	19	
		INTELLIGENCE COLLECTOR	20	
		SURVEY VESSEL	21	
		NON-MILITARY	22	
		LANDING PLATFORM	23	
		LANDING SHIP	24	
		COMMAND	25	
		OCEAN RESEARCH	26	
		PATROL	27	
		SUPPORT	28	
		FISHING VESSEL	29	
		MERCHANT VESSEL	30	
		PATROL CRAFT ESCORT	31	
		AMPHIBIOUS GENERAL	32	
		ASSAULT		
		MISSILE CONTROL UNIT	33	
		DECOY	34	
		UNDEFINED	35 THROUGH 62	
		RESET TO NO STATEMENT	63	
1798	002	SURFACE (MARITIME) PLATFORM		THE SURFACE (MARITIME) PLATFORM
		ACTIVITY		ACTIVITY FIELD ALONG WITH THE SUR-
		-----		FACE (MARITIME) PLATFORM FIELD

5.1-666

MIL-STD-6016B

FIELD CODING FOR J3.3C1

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

1798	002	SURFACE (MARITIME) PLATFORM ACTIVITY	(CONTINUED)	
------	-----	---	-------------	--

FURTHER DEFINES THE IDENTITY OF A
SURFACE (MARITIME) TRACK.

NO STATEMENT	0
AIR WARFARE SUPPORT	1
OVER THE HORIZON	2
TARGETING (OTHT)	
TRAINING	3
LOGISTICS SUPPORT	4
ANTISURFACE WARFARE	5
ELECTRONIC WARFARE (EW)	6
FISHERY PROTECTION	7
SEARCH AND RESCUE (SAR)	8
ESCORTING	9
MINELAYING	10
TRANSITING	11
NAVAL GUNFIRE SUPPORT	12
INTRUDING	13
AMPHIBIOUS WARFARE	14
INTELLIGENCE COLLECTING	15
PATROL	16
TRANSPORT	17
ANTISUBMARINE WARFARE	18
(ASW)	
SHADOWING/INTERVENING	19
TOWING	20
SPECIAL WARFARE	21
STRIKE WARFARE	22
ANTI-AIR WARFARE	23
FISHING	24
PICKETING	25
MINE COUNTERMEASURES	26
MINE WARFARE	27
MARKING	28
NONCOMBATANT OPERATIONS	29
UNDERWAY REPLENISHMENT	30
SURVEYING	31
ELECTRONIC WARFARE	32
SUPPORT (ES)	
ELECTRONIC ATTACK (EA)	33
FLIGHT OPERATIONS	34
VIDEO DATA LINKING	35
(TARGETING)	

A METHOD OF PROVIDING REMOTE
TARGETING DATA TO A FIRING

5.1-667

MIL-STD-6016B

FIELD CODING FOR J3.3C1

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1798	002	SURFACE (MARITIME) PLATFORM ACTIVITY -----	(CONTINUED)	
		PLANE GUARD	36	PLATFORM/WEAPON.
		RESCUE SHIP/LIFEGUARD	37	
		UNDEFINED	38 THROUGH 49	
		RETURN TO BASE (RTB)	50	
		UNDEFINED	51 THROUGH 114	
		SURFACE (MARITIME) ACTIVITY 1 THROUGH 12	115 THROUGH 126	A SPECIFIC SURFACE (MARITIME) MISSION DEFINED BY THE JOINT OPERATIONAL COMMANDER.
		RESET TO NO STATEMENT	127	
797	004	MINUTE -----		THE MINUTE OF THE HOUR.
		0 THROUGH 59	0 THROUGH 59	IN ONE MINUTE INCREMENTS.
		ILLEGAL	60 THROUGH 62	
		NO STATEMENT	63	
792	001	HOUR ----		EXPRESSES TIME OF DAY OR A PERIOD OF TIME IN HOURS.
		0 HOUR	0	
		1 THROUGH 23 HOURS	1 THROUGH 23	IN ONE HOUR INCREMENTS.
		ILLEGAL	24 THROUGH 30	
		NO STATEMENT	31	

5.1-668

MIL-STD-6016B

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: SURFACE (MARITIME) TRACK AMPLIFICATION CONTINUATION WORD 2

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25	
<---																:	SAM/SSM TYPE, 3								:
																:									:
																:	9								:

[illegible]

WORD DESCRIPTION

WORD NUMBER: J3.3C2

WORD TITLE: SURFACE (MARITIME) TRACK AMPLIFICATION CONTINUATION WORD 2

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT #		RESOLUTION, CODING, ETC
			POSITION	BITS	
1550 001		WORD FORMAT	0-	1 2	01
1551 001		CONTINUATION WORD LABEL	2-	6 5	00010
1622 001		SAM/SSM TYPE, 1	7-	15 9	
1622 002		SAM/SSM TYPE, 2	16-	24 9	SAME CODING AS BITS 7-15
1622 003		SAM/SSM TYPE, 3	25-	33 9	SAME CODING AS BITS 7-15
756 036		SPARE	34-	69 36	

FIELD CODING FOR J3.3C2

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1622	001	SAM/SSM TYPE, 1 -----		IDENTIFIES A TYPE OF SAM/SSM ON BOARD A SURFACE VESSEL.
		NO STATEMENT	0	
		SAM	1	
		SSM	2	
		HAWK	3	
		I-HAWK	4	
		PATRIOT	5	
		NIKE	6	
		REDEYE	7	
		STINKER	8	
		HELLFIRE	9	
		PERSHING	10	
		FIM-92 STINGER	11	
		NIM-23 HAWK	12	
		MIM-42 REDEYE	13	
		MIM-72 CHAPARRAL	14	
		MIM-104 PATRIOT	15	
		RIM-2 TERRIER	16	
		RIM-7 SEA SPARROW	17	
		RIM-8 TALOS	18	
		RIM-24 TARTAR	19	
		RIM-66 STANDARD MISSILE	20	
		RIM-67 STANDARD MISSILE	21	
		BLOWPIPE	22	
		UNDEFINED	23	
		SEA DART	24	
		SEA WOLF	25	
		CROTALE	26	
		RAPIER	27	
		UNDEFINED	28	
		SAM ROLAND	29	
		SA-2 GUIDELINE	30	
		SA-3 GOA	31	
		SA-4 GANEF	32	
		SA-N-3 GOBLET	33	
		SA-5 GAMMON	34	
		SA-N-4 GECKO	35	
		SA-6 GAINFUL	36	
		SA-N-6 GRUMBLE	37	
		SA-7 GRAIL	38	
		SA-8 GECKO	39	
		SA-9 GASKIN	40	
		SA-10 GRUMBLE	41	
		SA-11 GADFLY	42	

FIELD CODING FOR J3.3C2

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1622	001	SAM/SSM TYPE, 1	(CONTINUED)	

		SA-12	43	
		SA-13 GOPHER	44	
		MISTRAL	45	
		SA-N-7 GADFLY	46	
		SA-N-8 GREMLIN	47	
		SA-14 GREMLIN	48	
		SA-16 GIMLET	49	
		SA-X-17	50	
		SM-2 BLOCK II	51	
		SM-2 BLOCK III	52	
		SM-2 BLOCK IIIA	53	
		SM-2 BLOCK IIIB	54	
		SM-2 BLOCK IV	55	
		SM-2 BLOCK IVA	56	
		SM-3 LEAP	57	
		SA-N-5 GRAIL	58	
		SA-N-11 GRISOM	59	
		SA-12A GLADIATOR	60	
		SA-12B GIANT	61	
		UNDEFINED	62	
		SA-15 GAUNTLET	63	
		SA-17 GRIZZLY	64	
		SA-N-12 GRIZZLY	65	
		SA-18 GROUSE	66	
		SA-19 GRISOM	67	
		RIM-116 RAM	68	
		ADATS	69	
		JAVELIN	70	
		STARBURST	71	
		STARSTREAK	72	
		ASPIDE	73	
		FRONT DOOR	74	
		ROLAND II	75	
		AKASH	76	
		ANZA	77	
		ANZA II	78	
		CSA-1	79	
		CSA-2	80	
		CSA-4	81	
		CSA-5	82	
		FM-80	83	
		HN-5	84	
		NK-7	85	

FIELD CODING FOR J3.3C2

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1622	001	SAM/SSM TYPE, 1	(CONTINUED)	

		NK-16	86	
		PANTZYR	87	
		RAPIER 2000/JERNAS	88	
		RBS-90	89	
		SAKR	90	
		SAVA	91	
		SHANINE	92	
		SKYGUARD ASPIDE	93	
		SPADA	94	
		TAM SAM	95	
		TIGERCAT	96	
		VANGUARD	97	
		SA-N-1 GOA	98	
		SA-N-9 GAUNTLET	99	
		SA-N-10	100	
		ALBATROS/ASPIDE	101	
		SM-1	102	
		SA-2 IRAQ MOD	103	
		SA-2 NK RO	104	
		AEGIS-TI	105	
		MASURCA	106	
		SEA INDIGO	107	
		TANSAM	108	
		GUARDSMAN	109	
		SILKWORM	110	
		SNOW DRIFT 11/17	111	
		TUBE ARM SA-11	112	
		UNDEFINED	113	
		EYE SHIELD	114	
		SS-N-2	115	
		ELDORADO	116	
		FLYCATCHER	117	
		GEPARD	118	
		GIN SLING	119	
		SS-N-S SCOOP PAIR	120	
		SGR-105 DA-01/00	121	
		RBS-70 (SLM)	122	
		ASTER 15	123	
		ASTER 30	124	
		EXOCET MM38	125	
		EXOCET MM40	126	
		BARAK I	127	
		RBS-15	128	

FIELD CODING FOR J3.3C2

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1622	001	SAM/SSM TYPE, 1	(CONTINUED)	

		OTOMAT MK I	129	
		OTOMAT MK II TESEO	130	
		HY 2	131	
		SS-N-3C SHADDOCK	132	
		SS-N-8 SAWFLY	133	
		SS-N-9 SIREN	134	
		SS-N-12 SANDBOX	135	
		SS-N-14 SILEX	136	
		SS-N-15 STARFISH	137	
		SS-N-16 STALLION	138	
		SS-N-18 STINGRAY	139	
		SS-N-19 SHIPWRECK	140	
		SS-N-20 STURGEON	141	
		SS-N-21 SAMPSON	142	
		SS-N-22 SUNBURN	143	
		SS-N-23 SKIFF	144	
		SS-N-24 SCORPION	145	
		SS-NX-25	146	
		SS-NX-26	147	
		SS-NX-28	148	
		PENGUIN MK II	149	
		GABRIEL I	150	
		RGM-84 HARPOON	151	
		BGM-109 TOMAHAWK	152	
		PAMS	153	
		HARPOON	154	
		TLAM	155	
		UNDEFINED	156 THROUGH 510	
		RESET TO NO STATEMENT	511	

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

J3.4 MESSAGE SUMMARY

PURPOSE

The J3.4 Subsurface (Maritime) Track Message is used to exchange information on subsurface (maritime) tracks and DATUMS.

DATA ELEMENT SUMMARY

<u>J3.4I</u>		<u>J3.4C1 (Continued)</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	MODE I CODE	5
LABEL, J-SERIES	5	MODE II CODE	12
SUBLABEL, J-SERIES	3	MODE III CODE	12
MESSAGE LENGTH INDICATOR	3	MODE IV INDICATOR	2
EXERCISE INDICATOR	1	TIME FUNCTION, ASW	2
PPLI TRACK NUMBER AND IDENTITY INDICATOR	1	SPARE	3
FORCE TELL INDICATOR	1	<u>J3.4C2</u>	
EMERGENCY INDICATOR	1	DATA ELEMENT	# BITS
SPECIAL PROCESSING INDICATOR	1	WORD FORMAT	2
SIMULATION INDICATOR	1	CONTINUATION WORD LABEL	5
TRACK NUMBER, REFERENCE	19	SUBSURFACE (MARITIME) SPECIFIC TYPE	12
DATA REPORT TYPE	3	DATUM ERROR	8
IDENTITY(3)*****		SPARE	43
IDENTITY AMPLIFYING *	3		
DESCRIPTOR(3)*****			
CONFIDENCE LEVEL	5		
SUBSURFACE (MARITIME) PLATFORM	6		
SUBSURFACE (MARITIME) PLATFORM ACTIVITY	7		
IDENTITY DIFFERENCE INDICATOR	1		
LAUNCH CAPABILITY	2		
SPARE	5		
<u>J3.4E0</u>			
DATA ELEMENT	# BITS		
WORD FORMAT	2		
SPARE	3		
LATITUDE, 0.0051 MINUTE	21		
LONGITUDE, 0.0051 MINUTE	22		
SPARE	2		
COURSE	9		
SPEED, ASW	9		
SPARE	2		
<u>J3.4C1</u>			
DATA ELEMENT	# BITS		
WORD FORMAT	2		
CONTINUATION WORD LABEL	5		
MINUTE	6		
HOURL	5		
DEPTH, 15 METERS	7		
DEPTH CONTACT	4		
SENSOR	5		

MIL-STD-6016B

J3.4 TRANSMIT/RECEIVE RULES

TITLE: Subsurface (Maritime) Track Message

TRANSMIT RULES

1. The J3.4B Subsurface (Maritime) Track basic message consists of the J3.4I Subsurface (Maritime) Track initial word and the J3.4E0 Subsurface (Maritime) Track extension word. The J3.4B basic message shall be transmitted once by the JU with R²:

- a. When reporting a new subsurface (maritime) track on the interface.
- b. When a track alert is initiated on the subsurface (maritime) track.
- c. Periodically at a RRN = 4 (48 seconds, 36-60 second interval), or at an RRN = 6 (12 seconds, 8-20 second interval) if J3.4I Subsurface (Maritime) Platform = 20, Torpedo.
- d. When any data element reported in the J3.4B message changes except Course, Speed, Latitude/Longitude, or Time, i.e., Hours/Minutes.
- e. When a J7.1 (ACT = 1) Data Update Request by Track Number message is received on the subsurface (maritime) track.
- f. When J2.4 Subsurface (Maritime) PPLI messages are no longer being received on a track for which local sensor data exist, in accordance with paragraphs 4.4.2.2.1 and 4.4.5.11.

2. The J3.4C1 Subsurface (Maritime) Track Continuation Word 1 and/or J3.4C2 Subsurface (Maritime) Track Continuation Word 2 shall be transmitted by the JU with R²:

- a. The same as 1.a, b, e, and f above if any data element(s) in the J3.4C1 and/or J3.4C2 word are held.
- b. At the next transmission of the basic message when any data in the J3.4C1 and/or J3.4C2 word change.

MIL-STD-6016B

J3.4 TRANSMIT/RECEIVE RULES (Continued)

TRANSMIT RULES (Continued)

3. The J3.4 messages on the specified subsurface (maritime) track shall cease being transmitted upon receipt of a J2.4 PPLI message from the unit being reported in accordance with paragraph 4.4.5.11.

RECEIVE RULES

There are no receive rules specified for this message.

.....

WORD TITLE: SUBSURFACE (MARITIME) TRACK INITIAL WORD

49:	48	47	46	45	44:	43	42	41:	40	39	38:	37	36	35	34	33	32	31	30	29	28	27	26	25
						IDENTITY																		
CONFIDENCE LEVEL						DATA REPORT:				TRACK NUMBER, REFERENCE														
						ID AMP		TYPE																
						DESCR																		
5						3		3		19														

:	69	68	67	66	65:	64	63:	62:	61	60	59	58	57	56	55:	54	53	52	51	50					
:						:	:ID :		SUBSURFACE (MARITIME) :							SUBSURFACE									
:	SPARE					:	LCH	CAP:	DIF:	PLATFORM ACTIVITY							:	(MARITIME) PLATFORM							
:						:	:	:	:								:								
:	5					:	2		:	1		:	7							:	6				

WORD DESCRIPTION

WORD NUMBER: J3.4I

WORD TITLE: SUBSURFACE (MARITIME) TRACK INITIAL WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	00
270	004	LABEL, J-SERIES	2-	6 5	00011
271	005	SUBLABEL, J-SERIES	7-	9 3	100
800	001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
385	003	EXERCISE INDICATOR (EX IND)	13	1	
839	001	PPLI TRACK NUMBER AND IDENTITY INDICATOR (PP T/I)	14	1	
354	002	FORCE TELL INDICATOR (FT IND)	15	1	
355	002	EMERGENCY INDICATOR (EMG IND)	16	1	
292	002	SPECIAL PROCESSING INDICATOR (SPI)	17	1	
1604	001	SIMULATION INDICATOR (SIM IND)	18	1	
769	002	TRACK NUMBER, REFERENCE	19-	37 19	
357	001	DATA REPORT TYPE	38-	40 3	
376	007	IDENTITY	41-	43 3	
376	001	IDENTITY AMPLIFYING DESCRIPTOR (ID AMP DESCR)	41-	43 3	
358	001	CONFIDENCE LEVEL	44-	48 5	
1797	003	SUBSURFACE (MARITIME) PLATFORM	49-	54 6	
1798	003	SUBSURFACE (MARITIME) PLATFORM ACTIVITY	55-	61 7	
1860	001	IDENTITY DIFFERENCE INDICATOR (ID DIF)	62	1	
1973	001	LAUNCH CAPABILITY (LCH CAP)	63-	64 2	
756	005	SPARE	65-	69 5	

FIELD CODING FOR J3.4I

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
385	003	EXERCISE INDICATOR -----		INDICATES WHETHER OR NOT THE MESSAGE IDENTIFIES AN EXERCISE TRACK.
		NON-EXERCISE TRACK	0	
		EXERCISE TRACK OR UNIT	1	
839	001	PPLI TRACK NUMBER AND IDENTITY INDICATOR -----		INDICATES WHETHER OR NOT THE REFERENCE TN AND IDENTITY IN THIS MESSAGE WAS RECEIVED PREVIOUSLY IN A PPLI MESSAGE.
		NO STATEMENT	0	
		SOURCE OF TN AND IDENTITY IS FROM PPLI	1	INDICATES THAT THE REFERENCE TN AND IDENTITY IN THIS MESSAGE WAS RECEIVED IN A PPLI MESSAGE.
354	002	FORCE TELL INDICATOR -----		THIS INDICATOR CAUSES TRACK/POINT DATA TO BE FORCED THROUGH CONTROLLABLE RECEIVE FILTERS.
		NO STATEMENT	0	
		FORCE TELL STATUS	1	
355	002	EMERGENCY INDICATOR -----		USED TO INDICATE WHETHER OR NOT A UNIT OR TRACK HAS AN EMERGENCY.
		NO STATEMENT	0	
		EMERGENCY STATUS	1	
292	002	SPECIAL PROCESSING INDICATOR -----		INDICATES THAT A MESSAGE REQUIRES SPECIAL PROCESSING.
		SPECIAL PROCESSING NOT REQUIRED	0	
		SPECIAL PROCESSING REQUIRED	1	
1604	001	SIMULATION INDICATOR -----		INDICATES WHETHER THE TRACK REFERENCED IN THE MESSAGE IS A REAL OR A SIMULATED TRACK.
		REAL TRACK OR UNIT	0	
		SIMULATED TRACK OR UNIT	1	
769	002	TRACK NUMBER, REFERENCE -----		A REFERENCE NUMBER USED TO ASSOCIATE INFORMATION AND DIRECTIVES WITH THE TRACK. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH

5.1-682

MIL-STD-6016B

FIELD CODING FOR J3.4I (SHEET 2)				
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	

FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE-BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6
00111	7
01000	A
01001	B
01010	C
01011	D
01100	E
01101	F
01110	G
01111	H
10000	J
10001	K
10010	L
10011	M
10100	N

FIELD CODING FOR J3.4I

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
				10101 P
				10110 Q
				10111 R
				11000 S
				11001 T
				11010 U
				11011 V
				11100 W
				11101 X
				11110 Y
				11111 Z
		00000	0	NO STATEMENT.
		00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU). ILLEGAL.
		00077	63	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU). RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		00100-00175	64 THROUGH 125	COLLECTIVE ADDRESS.
		00176	126	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		00177	127	ILLEGAL.
		00200-07776	128 THROUGH 4094	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		07777	4095	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		0A000-0Z777	4096 THROUGH 16383	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		10000-17777	16384 THROUGH 20479	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		20000-27777	32768 THROUGH 36863	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G.,

			FIELD CODING FOR J3.4I	(SHEET 4)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		2A000-2Z777	36864 THROUGH 49151	TRACKS AND REFERENCE POINTS. ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		70000-77776	114688 THROUGH 118782	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO

			FIELD CODING FOR J3.4I	(SHEET 5)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		77777	118783	C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS. ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
357	001	DATA REPORT TYPE -----		EXPRESSES THE TYPE OF SUBSURFACE TRACK BEING REPORTED.
		SUBSURFACE TRACK	0	
		SURFACED SUBMARINE	1	
		SNORKELING SUBMARINE	2	
		DISUSED	3	
		DATUM	4	
		UNDEFINED	5 THROUGH 7	
376	007	IDENTITY -----		EXPRESSES THE STANDARD IDENTITY OF A TRACK.
		PENDING	0	A TRACK WHICH HAS NOT BEEN SUBJECTED TO THE IDENTIFICATION PROCESS.
		UNKNOWN	1	AN EVALUATED TRACK WHICH HAS NOT BEEN IDENTIFIED.
		ASSUMED FRIEND	2	A TRACK WHICH IS ASSUMED TO BE A FRIEND BECAUSE OF ITS CHARACTERISTICS, BEHAVIOR, OR ORIGIN.
		FRIEND	3	A TRACK BELONGING TO A DECLARED FRIENDLY NATION.
		NEUTRAL	4	A TRACK WHOSE CHARACTERISTICS, BEHAVIOR, ORIGIN, OR NATIONALITY INDICATE THAT IT IS NEITHER SUPPORTING NOR OPPOSING FRIENDLY FORCES.
		SUSPECT	5	A TRACK WHICH IS POTENTIALLY HOSTILE BECAUSE OF ITS CHARACTERISTICS, BEHAVIOR, ORIGIN, OR NATIONALITY.
		HOSTILE	6	A TRACK DECLARED TO BELONG TO ANY OPPOSING NATION, PARTY, GROUP, OR ENTITY, WHICH BY VIRTUE OF ITS BEHAVIOR OR INFORMATION COLLECTED

FIELD CODING FOR J3.4I				(SHEET 6)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
376	007	IDENTITY -----	(CONTINUED)	
		UNDEFINED	7	ON IT SUCH AS CHARACTERISTICS, ORIGIN OR NATIONALITY CONTRIBUTES TO THE THREAT TO FRIENDLY FORCES.
376	001	IDENTITY AMPLIFYING DESCRIPTOR -----		A DESCRIPTOR ADDING TO THE STANDARD IDENTITY OF A TRACK INVOLVED IN AN EXERCISE. THE STANDARD IDENTITY IS FRIEND.
		EXERCISE PENDING	0	
		EXERCISE UNKNOWN	1	
		EXERCISE ASSUMED FRIEND	2	
		EXERCISE FRIEND	3	
		EXERCISE NEUTRAL	4	
		JOKER	5	
		FAKER	6	
		UNDEFINED	7	
358	001	CONFIDENCE LEVEL -----		EXPRESSES AN ASSESSMENT AS TO WHETHER CONTACTS ARE OF SUBMARINE ORIGIN WITH ADDED ASSESSMENT OF THE CONFIDENCE LEVEL.
		NO STATEMENT	0	
		UNCLASSIFIED	1	
		POSSIBLE SUBMARINE	2	
		LOW ONE		
		POSSIBLE SUBMARINE	3	
		LOW TWO		
		POSSIBLE SUBMARINE	4	
		HIGH THREE		
		POSSIBLE SUBMARINE	5	
		HIGH FOUR		
		PROBABLE SUBMARINE	6	
		CERTAIN SUBMARINE	7	
		NON SUBMARINE	8	
		SURFACE VESSEL	9	
		UNDEFINED	10 THROUGH 31	
1797	003	SUBSURFACE (MARITIME) PLATFORM -----		THE SUBSURFACE (MARITIME) PLATFORM FIELD ALONG WITH THE SUBSURFACE (MARITIME) PLATFORM ACTIVITY FIELD FURTHER DEFINES THE IDENTITY OF A

FIELD CODING FOR J3.4I

(SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1797	003	SUBSURFACE (MARITIME) PLATFORM (CONTINUED)		

		NO STATEMENT	0	
		SUBMARINE PROPULSION	1	
		UNKNOWN		
		DIESEL ELECTRIC	2	
		SUBMARINE GENERAL		
		DIESEL ELECTRIC ATTACK	3	
		SUBMARINE		
		DIESEL ELECTRIC MISSILE	4	
		SUBMARINE		
		DIESEL ELECTRIC	5	
		BALLISTIC MISSILE		
		SUBMARINE		
		TYPE 1 DIESEL	6	
		TYPE 2 DIESEL	7	
		TYPE 3 DIESEL	8	
		NUCLEAR SUBMARINE	9	
		GENERAL		
		NUCLEAR ATTACK SUBMARINE	10	
		NUCLEAR MISSILE	11	
		SUBMARINE		
		NUCLEAR BALLISTIC	12	
		MISSILE SUBMARINE		
		TYPE I NUCLEAR	13	
		TYPE II NUCLEAR	14	
		TYPE III NUCLEAR	15	
		TYPE IV NUCLEAR	16	
		TYPE V NUCLEAR	17	
		NON-SUBMARINE	18	
		SURFACE VESSEL	19	
		TORPEDO	20	
		MINE	21	
		DECOY	22	
		WRECK	23	
		SEABED PIPELINE	24	
		FISH/MARINE LIFE	25	
		SWIMMER/FROGMAN	26	
		KNUCKLE/WAKE	27	
		ATTACK SUBMARINE	28	
		CRUISE MISSILE LAUNCHER	29	
		PINNACLE/SEAMOUNTAIN	30	
		NON-MILITARY	31	
		SUBMERSIBLE		
				SUBSURFACE (MARITIME) TRACK.

FIELD CODING FOR J3.4I

(SHEET 8)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

1797	003	SUBSURFACE (MARITIME) PLATFORM (CONTINUED)		
------	-----	--	--	--

UNDEFINED	32
TYPE VI NUCLEAR	33
TYPE VII NUCLEAR	34
CONVENTIONAL (COMMAND	35
AND CONTROL)	
CONVENTIONAL (AUXILIARY)	36
NUCLEAR (COMMAND AND	37
CONTROL)	
UNDEFINED	38 THROUGH 48
MISSILE CONTROL UNIT	49
UNDEFINED	50 THROUGH 62
RESET TO NO STATEMENT	63

1798	003	SUBSURFACE (MARITIME) PLATFORM ACTIVITY		
------	-----	--	--	--

NO STATEMENT	0
RECONNAISSANCE	1
OVER THE HORIZON	2
TARGETING (OTHT)	
TRAINING	3
DIVING	4
ANTISURFACE WARFARE	5
ELECTRONIC WARFARE (EW)	6
SURVEILLANCE	7
SEARCH AND RESCUE (SAR)	8
ESCORTING	9
MINELAYING	10
TRANSITING	11
SPECIAL WEAPONS ATTACK	12
SURFACING	13
AMPHIBIOUS WARFARE	14
INTELLIGENCE COLLECTING	15
PATROL	16
TRANSPORT	17
ANTISUBMARINE WARFARE	18
(ASW)	
SHADOWING/INTERVENING	19
BOTTOMING	20
SPECIAL WARFARE	21
STRIKE WARFARE	22

	THE SUBSURFACE (MARITIME) PLATFORM ACTIVITY FIELD ALONG WITH THE SUB- SURFACE (MARITIME) PLATFORM FIELD FURTHER DEFINES THE IDENTITY OF A SUBSURFACE (MARITIME) TRACK.
--	--

FIELD CODING FOR J3.4I

(SHEET 9)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1798	003	SUBSURFACE (MARITIME) PLATFORM (CONTINUED) ACTIVITY -----		
		CLANDESTINE OPERATIONS	23	
		SNORKELING	24	
		CONVENTIONAL ATTACK	25	
		MINE COUNTERMEASURES	26	
		MINE WARFARE	27	
		MARKING	28	
		NONCOMBATANT OPERATIONS	29	
		DIRECT SUPPORT	30	
		VIDEO DATA LINKING (TARGETING)	31	A METHOD OF PROVIDING REMOTE TARGETING DATA TO A FIRING PLATFORM/WEAPON.
		UNDEFINED	32 THROUGH 49	
		RETURN TO BASE (RTB)	50	
		UNDEFINED	51 THROUGH 114	
		SUBSURFACE (MARITIME) ACTIVITY 1 THROUGH 12	115 THROUGH 126	A SPECIFIC SUBSURFACE (MARITIME) MISSION DEFINED BY THE JOINT OPERATIONAL COMMANDER.
		RESET TO NO STATEMENT	127	
1860	001	IDENTITY DIFFERENCE INDICATOR -----		THE IDENTITY DIFFERENCE INDICATOR IS USED TO INDICATE THAT A CONFLICT IN THE IDENTITY OF THE TRACK/ REFERENCE TN IS CURRENTLY BEING EVALUATED BY THE UNIT WITH REPORTING RESPONSIBILITY.
		NO STATEMENT	0	NO IDENTITY DIFFERENCE EXISTS ON REFERENCE TN AT THIS TIME, OR PREVIOUS CONFLICT HAS BEEN RESOLVED.
		IDENTITY DIFFERENCE	1	AN IDENTITY DIFFERENCE EXISTS ON REFERENCE TN. THE IDENTITY BEING REPORTED IS THE LATEST IDENTITY LOCALLY HELD BY THE UNIT WITH REPORTING RESPONSIBILITY PRIOR TO THE CONFLICT, NOT THE CONFLICTING IDENTITY CURRENTLY UNDER OPERATOR EVALUATION.
1973	001	LAUNCH CAPABILITY -----		INDICATES WHETHER A SUBMARINE MUST BE SURFACED TO LAUNCH ITS MISSILES.
		NO STATEMENT	0	

5.1-690

MIL-STD-6016B

FIELD CODING FOR J3.4I					(SHEET 10)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION	
1973	001	LAUNCH CAPABILITY	(CONTINUED)		

		MAY LAUNCH MISSILE	1		
		WHILE SUBMERGED			
		MUST BE SURFACED TO	2		
		LAUNCH MISSILE			
		UNDEFINED	3		

.....

WORD TITLE: SUBSURFACE (MARITIME) TRACK EXTENSION WORD

[illegible]

:	69	:	68:	67		66		65		64		63		62		61		60	:	59:	58		57		56		55		54		53		52		51		50:
:		:																	:																	:	
:	SP	:								SPEED,	ASW								:								COURSE									:	
:	2	:								9									:								9									:	

WORD DESCRIPTION

WORD NUMBER: J3.4E0

WORD TITLE: SUBSURFACE (MARITIME) TRACK EXTENSION WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	10
756 003	SPARE	2-	4 3	
281 014	LATITUDE, 0.0051 MINUTE	5-	25 21	
282 014	LONGITUDE, 0.0051 MINUTE	26-	47 22	
756 002	SPARE (SP)	48-	49 2	
371 015	COURSE	50-	58 9	
367 023	SPEED, ASW	59-	67 9	
756 002	SPARE (SP)	68-	69 2	

FIELD CODING FOR J3.4E0

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
281	014	LATITUDE, 0.0051 MINUTE ----- 0 DEGREES +90/1,048,575 THROUGH +90 DEGREES NORTH NO STATEMENT -90 THROUGH -90/1,048,575 DEGREES SOUTH	0 1 THROUGH 1048575 1048576 1048577 THROUGH 2097151	THE PRECISION IS APPROXIMATELY 31 FEET. IN 90/1,048,575 DEGREE INCREMENTS.
282	014	LONGITUDE, 0.0051 MINUTE ----- 0 DEGREES +180/2,097,151 THROUGH +180 DEGREES EAST NO STATEMENT -180 THROUGH -180/2,097,151 DEGREES WEST	0 1 THROUGH 2097151 2097152 2097153 THROUGH 4194303	THE PRECISION IS APPROXIMATELY 31 FEET. IN 180/2,097,151 DEGREE INCREMENTS.
371	015	COURSE ----- 0 THROUGH 359 DEGREES ILLEGAL NO STATEMENT	0 THROUGH 359 360 THROUGH 510 511	INDICATES THE DIRECTION OF TRAVEL OF AN OBJECT IN DEGREES WITH RESPECT TO TRUE NORTH. IN 1 DEGREE INCREMENTS.
367	023	SPEED, ASW ----- 0 THROUGH 255.0 DATA MILES PER HOUR NO STATEMENT	0 THROUGH 510 511	THE SPEED OF A SUBSURFACE CONTACT. EXPRESSES SPEED OF CONTACT IN .5 DATA MILES PER HOUR INCREMENTS.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: SUBSURFACE (MARITIME) TRACK CONTINUATION WORD 1

49	48	47	46	45	44	43	42	41	40	39:	38	37	36	35	34:	33	32	31	30	29:	28	27	26	25:			
MODE II CODE										:	MODE I CODE					:	SENSOR					:	DEPTH CONTACT				:
12										:	5					:	5					:	4				:

:	69	68	67:	66	65:	64	63:	62	61	60	59	58	57	56	55	54	53	52	51:	50	
:				TIME	:															:	
:	SPARE			FCT	:	M4	IND	:	MODE III CODE											:--->	
:				:	:	:	:														:
:	3			:	2	:	2	:	12											:	

WORD DESCRIPTION

WORD NUMBER: J3.4C1

WORD TITLE: SUBSURFACE (MARITIME) TRACK CONTINUATION WORD 1

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550 001		WORD FORMAT	0-	1 2	01
1551 001		CONTINUATION WORD LABEL	2-	6 5	0001
797 004		MINUTE	7-	12 6	
792 001		HOUR	13-	17 5	
366 008		DEPTH, 15 METERS	18-	24 7	
366 014		DEPTH CONTACT	25-	28 4	
359 001		SENSOR	29-	33 5	
293 003		MODE I CODE	34-	38 5	SEE NOTE 1.
294 002		MODE II CODE	39-	50 12	SEE NOTE 1.
295 002		MODE III CODE	51-	62 12	SEE NOTE 1.
298 001		MODE IV INDICATOR (M4 IND)	63-	64 2	SEE NOTE 1.
1681 003		TIME FUNCTION, ASW (TIME FCT)	65-	66 2	
756 003		SPARE	67-	69 3	

MIL-STD-6016B

J3.4C1 WORD NOTES

TITLE: Subsurface (Maritime) Track Continuation Word 1

NOTE 1 - JUs with the appropriate IFF/SIF equipment shall implement Mode I Code, Mode II Code, Mode III Code, and Mode IV Indicator. JUs that can only interlace two modes at one time shall transmit only the appropriate codes.

FIELD CODING FOR J3.4C1

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
797	004	MINUTE ----- 0 THROUGH 59 ILLEGAL NO STATEMENT	0 THROUGH 59 60 THROUGH 62 63	THE MINUTE OF THE HOUR. IN ONE MINUTE INCREMENTS.
792	001	HOUR ---- 0 HOUR 1 THROUGH 23 HOURS ILLEGAL NO STATEMENT	0 1 THROUGH 23 24 THROUGH 30 31	EXPRESSES TIME OF DAY OR A PERIOD OF TIME IN HOURS. IN ONE HOUR INCREMENTS.
366	008	DEPTH, 15 METERS ----- 0 THROUGH 1890 METERS NO STATEMENT	0 THROUGH 126 127	EXPRESSES DEPTH AS MEASURED DOWNWARD FROM MEAN SEA LEVEL (MSL) AS A POSITIVE QUANTITY IN METERS. IN 15 METER INCREMENTS.
366	014	DEPTH CONTACT ----- NO STATEMENT ESTIMATED SHALLOW ABOVE LAYER BELOW LAYER ESTIMATED DEEP BOTTOMED UNKNOWN PERISCOPE DEPTH UNDEFINED	0 1 2 3 4 5 6 7 8 THROUGH 15	EXPRESSES DEPTH BY DESCRIPTION OF HORIZONTAL PLANES AT OR BELOW MEAN SEA LEVEL (MSL).
359	001	SENSOR ----- NO STATEMENT/UNKNOWN ACTIVE SONAR PASSIVE SONAR PASSIVE SONOBUOY ACTIVE SONOBUOY MAD VISUAL RADAR ES TAS/TAC TAS IRDS	0 1 2 3 4 5 6 7 8 9 10	EXPRESSES TYPE OF SENSOR DETECTING CONTACT.

5.1-699

MIL-STD-6016B

FIELD CODING FOR J3.4C1

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

359	001	SENSOR	(CONTINUED)	
-----	-----	--------	-------------	--

LOFAR	11
DIFAR	12
DIRECT PATH	13
BOTTOM BOUNCE	14
CONVERGENCE ZONE 1	15
CONVERGENCE ZONE 2	16
CONVERGENCE ZONE 3	17
LLLTV	18
UNDERWATER TELEPHONE	19
INTELLIGENCE	20
DESIGNATED FIX	21
PASSIVE SOURCE (CPA)	22
PASSIVE DIRECTIONAL	23
SONOBUOY	
DICASS	24
SOSUS	25
FLIR	26
SHIP SONAR	27
UNDEFINED	28 THROUGH 31

293	003	MODE I CODE	
-----	-----	-------------	--

0 (NO STATEMENT)	00 (OCTAL)
------------------	------------

1	01 (OCTAL)
2	02 (OCTAL)
3	03 (OCTAL)
4	10 (OCTAL)
5	11 (OCTAL)
6	12 (OCTAL)
7	13 (OCTAL)
8	20 (OCTAL)
9	21 (OCTAL)
10	22 (OCTAL)
11	23 (OCTAL)
12	30 (OCTAL)
13	31 (OCTAL)
14	32 (OCTAL)

PROVIDES MODE I BEACON REPLY
INFORMATION. WITHIN THE MODE
FIELD, SIF CODES ARE IN THE ORDER
A4 A2 A1 B2 B1. THE LEAST
SIGNIFICANT DIGIT CANNOT BE
GREATER THAN 3.

THIS CODE CANNOT BE ASSIGNED AS AN
OPERATIONAL CODE. INDICATES THERE
ARE NO DATA FOR TRANSMISSION.

FIELD CODING FOR J3.4C1

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
293	003	MODE I CODE -----	(CONTINUED)	
		15	33 (OCTAL)	
		16	40 (OCTAL)	
		17	41 (OCTAL)	
		18	42 (OCTAL)	
		19	43 (OCTAL)	
		20	50 (OCTAL)	
		21	51 (OCTAL)	
		22	52 (OCTAL)	
		23	53 (OCTAL)	
		24	60 (OCTAL)	
		25	61 (OCTAL)	
		26	62 (OCTAL)	
		27	63 (OCTAL)	
		28	70 (OCTAL)	
		29	71 (OCTAL)	
		30	72 (OCTAL)	
		31	73 (OCTAL)	
294	002	MODE II CODE -----		PROVIDES MODE II BEACON REPLY INFORMATION.
		NO STATEMENT	0	THIS CODE CANNOT BE ASSIGNED AS AN OPERATIONAL CODE. INDICATES THERE ARE NO DATA FOR TRANSMISSION.
		1 THROUGH 7777 (OCTAL)	0001 THROUGH 7777 (OCTAL)	WITHIN THE FIELD, SIF CODES ARE IN THE ORDER A, B, C, D WITH EACH TRIAD IN THE ORDER 4, 2, 1.
295	002	MODE III CODE -----		PROVIDES MODE III BEACON REPLY INFORMATION.
		NO STATEMENT	0	THIS CODE CANNOT BE ASSIGNED AS AN OPERATIONAL CODE. INDICATES THERE ARE NO DATA FOR TRANSMISSION.
		1 THROUGH 7777 (OCTAL)	0001 THROUGH 7777 (OCTAL)	WITHIN THE FIELD, SIF CODES ARE IN THE ORDER A, B, C, D WITH EACH TRIAD IN THE ORDER 4, 2, 1.
298	001	MODE IV INDICATOR -----		THE MODE IV BEACON REPLY.
		NOT INTERROGATED/NO STATEMENT	0	
		INTERROGATED, NO RESPONSE	1	

FIELD CODING FOR J3.4C1

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
298	001	MODE IV INDICATOR -----	(CONTINUED)	
		INTERROGATED, INVALID RESPONSE	2	
		INTERROGATED, VALID RESPONSE	3	
1681	003	TIME FUNCTION, ASW -----		USED IN CONJUNCTION WITH THE MINUTE AND HOUR FIELDS TO DESCRIBE THE TIME FUNCTION ASSOCIATED WITH A SUBSURFACE TRACK REPORT.
		NO STATEMENT	0	
		TIME CONTACT FIRST ACQUIRED/TIME DATUM ESTABLISHED	1	
		TIME OF CURRENT POSITIONAL DATA	2	
		TIME CONTACT LOST	3	

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: SUBSURFACE (MARITIME) TRACK CONTINUATION WORD 2

24	23	22	21	20	19:	18	17	16	15	14	13	12	11	10	09	08	07:	06	05	04	03	02:	01	00:			
DATUM ERROR					:	SUBSURFACE (MARITIME) SPECIFIC TYPE												:	CONTINUATION WORD LABEL					:	WORD FORMAT		:
8					:	12												:	5					:	2		:

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
																						:		
SPARE																						:	---	>
																						:		
43																						:		

```
: 69 68 67 66 65 64 63 62 61 60 59 58 57 56 55 54 53 52 51 50
:
:
:                                     --->
:
```

WORD DESCRIPTION

WORD NUMBER: J3.4C2

WORD TITLE: SUBSURFACE (MARITIME) TRACK CONTINUATION WORD 2

REFERENCE		BIT #		RESOLUTION, CODING, ETC
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	00010
809 001	SUBSURFACE (MARITIME) SPECIFIC TYPE	7-	18 12	
1568 001	DATUM ERROR	19-	26 8	
756 043	SPARE	27-	69 43	

FIELD CODING FOR J3.4C2

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
809	001	SUBSURFACE (MARITIME) SPECIFIC TYPE -----		THE SPECIFIC TYPE OF POINT OR TRACK WITH AN ENVIRONMENT/CATEGORY OF SUBSURFACE (MARITIME).
		NO STATEMENT	0	
		SS GENERAL	1	
		ABTAO SS	2	
		DISUSED	3	
		DISUSED	4	
		UNDEFINED	5	
		DISUSED	6	
		GUPPY II SS	7	
		GUPPY IIA SS	8	
		GUPPY III SS	9	
		HAI LUNG SS	10	
		DISUSED	11	
		SAURO (TYPE 1081) SS	12	
		SAURO (IMPROVED) SS	13	
		TANG SS	14	
		TYPE SNA 72 SS	15	
		UZUSHIO SS	16	
		WALRUS SS	17	
		YUUSHIO SS	18	
		UNDEFINED	19	
		DISUSED	20	
		PELOSI SS	21	
		UNDEFINED	22 THROUGH 360	
		SSB GENERAL	361	
		GOLF SSB	362	
		GOLF II SSB	363	
		GOLF III SSB	364	
		GOLF V SSB	365	
		UNDEFINED	366 THROUGH 440	
		SSBN GENERAL	441	
		BENJAMIN FRANKLIN SSBN	442	
		DELTA I SSBN	443	
		DELTA II SSBN	444	
		DELTA III SSBN	445	
		DELTA IV SSBN	446	
		HOTEL III SSBN	447	
		DISUSED	448	
		L'INFLEXIBLE SSBN	449	
		DISUSED	450	
		UNDEFINED	451	
		OHIO SSBN	452	
		RESOLUTION SSBN	453	

FIELD CODING FOR J3.4C2

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
809	001	SUBSURFACE (MARITIME) SPECIFIC (CONTINUED)		
		TYPE		

		TYPHOON SSBN	454	
		VANGUARD SSBN	455	
		YANKEE SSBN	456	
		YANKEE I SSBN	457	
		YANKEE II SSBN	458	
		XIA SSBN	459	
		LE TERRIBLE SSBN	460	
		UNDEFINED	461	THROUGH 720
		SSN GENERAL	721	
		AKULA SSN	722	
		ALFA SSN	723	
		AMATHEPT SSN	724	
		CHARLIE/VICTOR SSGN/SSN	725	
		CHURCHILL SSN	726	
		ECHO/NOVEMBER SSGN/SSN	727	
		DISUSED	728	
		DISUSED	729	
		HAN SSN	730	
		HOTEL SSN	731	
		LOS ANGELES SSN	732	
		MIKE SSN	733	
		NARWHAL SSN	734	
		DISUSED	735	
		RUBIS SSN	736	
		SEAWOLF SSN	737	
		SIERRA SSN	738	
		DISUSED	739	
		DISUSED	740	
		STURGEON SSN	741	
		SWIFTSURE SSN	742	
		TRAFALGAR SSN	743	
		DISUSED	744	
		VICTOR I SSN	745	
		VICTOR II SSN	746	
		VICTOR III SSN	747	
		YANKEE SSN	748	
		VIRGINIA SSN	749	
		UNDEFINED	750	THROUGH 1200
		SSG GENERAL	1201	
		JULIETT SSG	1202	
		UNDEFINED	1203	THROUGH 1245
		SSGN GENERAL	1246	

5.1-707

MIL-STD-6016B

FIELD CODING FOR J3.4C2

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
809	001	SUBSURFACE (MARITIME) SPECIFIC (CONTINUED)		
		TYPE		
		CHARLIE I SSGN	1247	
		CHARLIE II SSGN	1248	
		ECHO II SSGN	1249	
		OSCAR SSGN	1250	
		PAPA SSGN	1251	
		UNDEFINED	1252 THROUGH 1345	
		SSK GENERAL	1346	
		AGOSTA SSK	1347	
		UNDEFINED	1348	
		FOXTROT SSK	1349	
		HEROJ SSK	1350	
		KILO SSK	1351	
		MING SSK	1352	
		NARVAL SSK	1353	
		DISUSED	1354 THROUGH 1355	
		ROMEO SSK	1356	
		SAVA SSK	1357	
		SUTJESKA SSK	1358	
		TANGO SSK	1359	
		UPHOLDER SSK	1360	
		WHISKEY SSK	1361	
		WHISKEY V SSK	1362	
		ZULU IV SSK	1363	
		DORIS SSK	1364	
		VICTORIA SSK	1365	
		TYPE 212 SSK	1366	
		UNDEFINED	1367 THROUGH 1665	
		SSC GENERAL	1666	
		DELFINEN SSC	1667	
		DRAKEN SSC	1668	
		NAECKEN SSC	1669	
		NARHVALEN SSC	1670	
		SJOORMEN SSC	1671	
		TOTI TYPE 1075 SSC	1672	
		TYPE 205 SSC	1673	
		TYPE 206 SSC	1674	
		KOBBEN SSC	1675	
		TYPE 209 (TYPE 1100) SSC	1676	
		TYPE 209 (TYPE 1200) SSC	1677	
		TYPE 209 (TYPE 1300) SSC	1678	
		TYPE 209 (TYPE 1400) SSC	1679	
		TYPE 209 (TYPE 1500) SSC	1680	

FIELD CODING FOR J3.4C2

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
809	001	SUBSURFACE (MARITIME) SPECIFIC (CONTINUED) TYPE -----		
		ULA SSC	1681	
		TYPE 211 SSC	1682	
		VASTERGOETLAND SSC	1683	
		TYPE 206A SSC	1684	
		UNDEFINED	1685 THROUGH 1945	
		SSA GENERAL	1946	
		BRAVO SSA	1947	
		DOLPHIN (AGSS) SSA	1948	
		GOLF I SSA	1949	
		GOLF I (MODIFIED) SSA	1950	
		GOLF II SSA	1951	
		INDIA SSA	1952	
		LIMA SSA	1953	
		ROMEO SSA	1954	
		ZULU SSA	1955	
		UNDEFINED	1956 THROUGH 4069	
		SUBSURFACE SPECIFIC	4070 THROUGH 4094	
		TYPE 1-25		
		RESET TO NO STATEMENT	4095	
1568	001	DATUM ERROR -----		THE MAGNITUDE OF THE DATUM ERROR. USED ONLY FOR DATA REPORT TYPE VALUE = 4 IN J3.4 MESSAGE. IN 1/16 DM (125 YARDS) INCREMENTS. ALL ONES.
		0 THROUGH 15 14/16 DM	0 THROUGH 254	
		NO STATEMENT	255	

5.1-709

MIL-STD-6016B

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

J3.5 MESSAGE SUMMARY

The J3.5 Land (Ground) Point/track Message is used to exchange tactical surveillance information on land (ground) points and tracks.

<u>J3.5I</u>		<u>J3.5C1 (Continued)</u>	
<u>DATA ELEMENT</u>	<u># BITS</u>	<u>DATA ELEMENT</u>	<u># BITS</u>
WORD FORMAT	2	MODE II CODE	12
LABEL, J-SERIES	5	MODE III CODE	12
SUBLABEL, J-SERIES	3	MODE IV INDICATOR	2
MESSAGE LENGTH INDICATOR	3	PPLI IFF/SIF INDICATOR	2
EXERCISE INDICATOR	1	LAND (GROUND) PLATFORM(6)*****	*
DISUSED	1	LAND (GROUND) PLATFORM	*
FORCE TELL INDICATOR	1	ACTIVITY(7)	*
EMERGENCY INDICATOR	1	LAND (GROUND) SPECIFIC	*
SPECIAL PROCESSING INDICATOR	1	TYPE(12)	* 13
SIMULATION INDICATOR	1	SPARE(1)*****	*
TRACK NUMBER, REFERENCE	19	SPARE	2
STRENGTH	4	TIME FUNCTION	3
ELEVATION, 25 FT	11	MINUTE	6
POINT/TRACK INDICATOR	1	HOUR	5
PERIODIC REPORT INDICATOR	2		
PPLI TRACK NUMBER AND IDENTITY	1		
INDICATOR		<u>J3.5C2</u>	
IDENTITY DIFFERENCE INDICATOR	1	<u>DATA ELEMENT</u>	<u># BITS</u>
TRACK QUALITY	4	WORD FORMAT	2
IDENTITY CONFIDENCE	4	CONTINUATION WORD LABEL	5
IDENTITY(3)*****		TIME TAG, TIME OF VALIDITY	9
IDENTITY AMPLIFYING	*	UNIVERSAL TRANSVERSE MERCATOR	5
DESCRIPTOR(3)*****	3	100,000 METER SQUARE ROW	
SPECIAL INTEREST INDICATOR	1	UNIVERSAL TRANSVERSE MERCATOR	5
		100,000 METER SQUARE COLUMN	
		UNIVERSAL TRANSVERSE MERCATOR	5
		GRID ZONE ROW	
		SPARE	1
		UNIVERSAL TRANSVERSE MERCATOR	14
		10-METER NORTHING	
		SPARE	2
		UNIVERSAL TRANSVERSE MERCATOR	14
		10-METER EASTING	
		SPARE	2
		UNIVERSAL TRANSVERSE MERCATOR	6
		GRID ZONE COLUMN	
		<u>J3.5C3</u>	
		<u>DATA ELEMENT</u>	<u># BITS</u>
		WORD FORMAT	2
		CONTINUATION WORD LABEL	5
		STRENGTH, TOTAL NUMBER OF	4
		VEHICLES	
		STRENGTH, PERCENT OF TRACKED	4
		VEHICLES	

MIL-STD-6016B

J3.5 MESSAGE SUMMARY (Continued)

DATA ELEMENT SUMMARY (Continued)

J3.5C3 (Continued)	
DATA ELEMENT	# BITS
AREA MINOR AXIS, 3	8
AREA MAJOR AXIS, 3	8
AXIS ORIENTATION	8
ROUTE NUMBER, 1	10
SQUARE/CIRCLE SWITCH	2
LATITUDE, LSBS	3
LONGITUDE, LSBS	3
ELEVATION, LSBS	3
SPARE	10

MIL-STD-6016B

J3.5 TRANSMIT/RECEIVE RULES

TITLE: Land (Ground) Point/Track Message

TRANSMIT RULES

1. The J3.5B Land (Ground) Point/Track basic message consists of the J3.5I Land (Ground) Point/Track initial word and the J3.5E0 Land (Ground) Point/Track extension word. The J3.5B basic message shall be transmitted in one of the sequences below depending upon whether a point or moving track is being reported.

a. When reporting a land (ground) point (PTI = 0), a J3.5I/J3.5E0 word sequence shall be transmitted by the C² JU with R² once as follows:

(1) When a land (ground) point is initially reported (Periodic Report Indicator set to value 1).

(2) When assuming R² (Periodic Report Indicator set to value 2).

(3) When data changes (Periodic Report Indicator set to value 1).

(4) When requested by a J7.1 (ACT = 1) Data Update Request by Track Number message (Periodic Report Indicator set to value 0).

(5) When a force tell or emergency alert is initiated (Periodic Report Indicator set to value 1).

(6) Periodically at a RRN = 3 (96 seconds, 1.2-2 minute interval) (Periodic Report Indicator set to value 2).

b. When reporting a land (ground) track (PTI = 1), a J3.5I/J3.5E0 word sequence shall be transmitted once by the C² JU with R²:

(1) When reporting a new land (ground) track on the interface.

(2) When assuming R² of a land (ground) track.

J3.5 TRANSMIT/RECEIVE RULES (Continued)

TRANSMIT RULES (Continued)

- (3) When a track alert is initiated on the land (ground) track.
- (4) Periodically at an RRN of at least 4 (48 seconds, 36-60 second interval) for real-time land (ground) tracks.
- (5) Periodically at an RRN = 4 (48 seconds, 36-60 second interval) for nonreal-time land (ground) tracks.
- (6) When data elements other than Course, Speed, Elevation, and/or Latitude/Longitude change for real-time land (ground) tracks.
- (7) When any data element changes for the nonreal-time land (ground) track.
- (8) When a J7.1 (ACT = 1) Data Update Request by Track Number message is received on the land (ground) track.
- (9) When J2 PPLI messages are no longer being received on a track for which local sensor data exist, in accordance with paragraph 4.4.2.2.1.

c. The J3.5C1 Land (Ground) Point/Track Continuation Word 1 shall be transmitted, only if any data elements in the J3.5C1 are held, by a JU with R².

- (1) The same as a. (1), (2), (4), (5), and for b. (1), (2), (3), (8), (9).
- (2) At the next periodic transmission of the basic message when any data in the J3.5C1 word change.
- (3) Every 2 transmissions of the basic message.

J3.5 TRANSMIT/RECEIVE RULES (Continued)

TRANSMIT RULES (Continued)

(4) When Land (Ground) Platform/Land (Ground) Platform Activity, as well as Land (Ground) Specific Type data are available, the J3.5I/J3.5E0/J3.5C1 word sequence may be sent in alternate transmissions with the Land (Ground) Specific Type Indicator set to 0 and then with the Land (Ground) Specific Type Indicator set to 1 or when packing allows, two C1 words may be transmitted in a single message with the Land (Ground) Specific Type Indicator set to 1 in the first C1 word followed by another C1 word with the Land (Ground) Specific Type Indicator set to 0.

d. The J3.5C2 Land (Ground) Point/Track Continuation Word 2 shall be transmitted when the land (ground) track message is originated by a JU having a requirement to report position in UTM and metric terms.

e. The J3.5C3 Land (Ground) Point/Track Continuation Word 3 shall be transmitted, only if any data elements in the J3.5C3 are held, by a JU with R²:

(1) The same as a. (1), (2), (4), (5), and for b. (1), (2), (3), (8).

(2) At all periodic transmissions of the J3.5B basic message when the Track Identifier is set to E-Track or A-Track.

(3) Every 8 transmissions of the basic message for real-time land (ground) point/tracks.

(4) Every transmission of the basic message for a land (ground) point with an associated error.

(5) When messages are restricted to three words per time slot, the J3.5C3 shall be sent in alternating transmissions with the J3.5C1.

f. J3.5 messages on the specified land (ground) point/track shall cease being transmitted upon receipt of a J2 PPLI message from the unit being

J3.5 TRANSMIT/RECEIVE RULES (Continued)

reported once TN correlation has been completed. Additional criteria regarding the priorities/management of J2 or J3.5 messages are contained in paragraph 4.3 and 4.4.

RECEIVE RULES

There are no receive rules specified for this message.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD TITLE: LAND (GROUND) POINT/TRACK INITIAL WORD

<---

ELEVATION, 25 FT	STRENGTH	TRACK NUMBER, REFERENCE
11	4	19

IDENTITY		IDENTITY	TRACK QUALITY	ID	PP	PER IND	PTI
SI	IND	ID AMP DESCR	CONFIDENCE	DIF	T/I		
1	3	4	4	1	1	2	1

WORD DESCRIPTION

WORD NUMBER: J3.5I

WORD TITLE: LAND (GROUND) POINT/TRACK INITIAL WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	00
270	004	LABEL, J-SERIES	2-	6 5	00011
271	005	SUBLABEL, J-SERIES	7-	9 3	101
800	001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
385	003	EXERCISE INDICATOR (EX IND)	13	1	
758	001	DISUSED (DUD)	14	1	
354	002	FORCE TELL INDICATOR (FT IND)	15	1	
355	002	EMERGENCY INDICATOR (EMG IND)	16	1	
292	002	SPECIAL PROCESSING INDICATOR (SPI)	17	1	
1604	001	SIMULATION INDICATOR (SIM IND)	18	1	
769	002	TRACK NUMBER, REFERENCE	19-	37 19	
386	013	STRENGTH	38-	41 4	
1612	001	ELEVATION, 25 FT	42-	52 11	
378	001	POINT/TRACK INDICATOR (PTI)	53	1	
549	001	PERIODIC REPORT INDICATOR (PER IND)	54-	55 2	
839	001	PPLI TRACK NUMBER AND IDENTITY INDICATOR (PP T/I)	56	1	
1860	001	IDENTITY DIFFERENCE INDICATOR (ID DIF)	57	1	
280	001	TRACK QUALITY	58-	61 4	
1663	001	IDENTITY CONFIDENCE (ID CON)	62-	65 4	
376	007	IDENTITY	66-	68 3	
376	001	IDENTITY AMPLIFYING DESCRIPTOR (ID AMP DESCR)	66-	68 3	
1861	001	SPECIAL INTEREST INDICATOR (SI IND)	69	1	

FIELD CODING FOR J3.5I				(SHEET 1)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
385	003	EXERCISE INDICATOR ----- NON-EXERCISE TRACK EXERCISE TRACK OR UNIT	0 1	INDICATES WHETHER OR NOT THE MESSAGE IDENTIFIES AN EXERCISE TRACK.
354	002	FORCE TELL INDICATOR ----- NO STATEMENT FORCE TELL STATUS	0 1	THIS INDICATOR CAUSES TRACK/POINT DATA TO BE FORCED THROUGH CONTROLLABLE RECEIVE FILTERS.
355	002	EMERGENCY INDICATOR ----- NO STATEMENT EMERGENCY STATUS	0 1	USED TO INDICATE WHETHER OR NOT A UNIT OR TRACK HAS AN EMERGENCY.
292	002	SPECIAL PROCESSING INDICATOR ----- SPECIAL PROCESSING NOT REQUIRED SPECIAL PROCESSING REQUIRED	0 1	INDICATES THAT A MESSAGE REQUIRES SPECIAL PROCESSING.
1604	001	SIMULATION INDICATOR ----- REAL TRACK OR UNIT SIMULATED TRACK OR UNIT	0 1	INDICATES WHETHER THE TRACK REFERENCED IN THE MESSAGE IS A REAL OR A SIMULATED TRACK.
769	002	TRACK NUMBER, REFERENCE -----		A REFERENCE NUMBER USED TO ASSOCIATE INFORMATION AND DIRECTIVES WITH THE TRACK. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE-BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE

FIELD CODING FOR J3.5I				(SHEET 2)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
				REPRESENTED BY AANN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.
				CODING CHARACTER
				00000 0
				00001 1
				00010 2
				00011 3
				00100 4
				00101 5
				00110 6
				00111 7
				01000 A
				01001 B
				01010 C
				01011 D
				01100 E
				01101 F
				01110 G
				01111 H
				10000 J
				10001 K
				10010 L
				10011 M
				10100 N
				10101 P
				10110 Q
				10111 R
				11000 S
				11001 T
				11010 U
				11011 V
				11100 W
				11101 X

		FIELD CODING FOR J3.5I		(SHEET 3)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
				11110 Y
				11111 Z
		00000	0	NO STATEMENT.
		00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		00077	63	ILLEGAL.
		00100-00175	64 THROUGH 125	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		00176	126	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		00177	127	COLLECTIVE ADDRESS.
		00200-07776	128 THROUGH 4094	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		07777	4095	ILLEGAL.
		0A000-0Z777	4096 THROUGH 16383	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		10000-17777	16384 THROUGH 20479	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		20000-27777	32768 THROUGH 36863	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G.,

			FIELD CODING FOR J3.5I	(SHEET 4)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		3A000-3Z777	53248 THROUGH 65535	TRACKS AND REFERENCE POINTS. ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		70000-77776	114688 THROUGH 118782	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.

			FIELD CODING FOR J3.5I	(SHEET 5)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
386	013	STRENGTH -----		EXPRESSES THE NUMBER OF ENTITIES REPRESENTED BY A SINGLE TRACK.
		NO STATEMENT	0	
		1 UNIT	1	
		2 UNITS	2	
		3 UNITS	3	
		4 UNITS	4	
		5 UNITS	5	
		6 UNITS	6	
		7 UNITS	7	
		8 UNITS	8	
		9 UNITS	9	
		10 UNITS	10	
		11 UNITS	11	
		12 UNITS	12	
		2 THROUGH 7 (FEW) UNITS	13	
		GREATER THAN 7 (MANY) UNITS	14	
		GREATER THAN 12 UNITS	15	
1612	001	ELEVATION, 25 FT -----		THE ELEVATION IN FEET OF AN OBJECT OR POINT AS MEASURED OUTWARD FROM THE EARTH AS A POSITIVE QUANTITY ABOVE MEAN SEA LEVEL (MSL). IN 25 FOOT INCREMENTS.
		0 THROUGH 51,150 FEET	0 THROUGH 2046	
		ELEVATION UNKNOWN	2047	
378	001	POINT/TRACK INDICATOR -----		IDENTIFIES WHETHER REPORTED OBJECT IS A POINT OR TRACK.
		POINT	0	REPORTED OBJECT IS A POINT.
		TRACK	1	REPORTED OBJECT IS A TRACK.
549	001	PERIODIC REPORT INDICATOR -----		INDICATES THE TYPE OF REPORT.
		NO STATEMENT	0	
		ORIGINAL/CHANGE	1	THIS IS AN ORIGINAL MESSAGE OR A MESSAGE TRANSMITTED BECAUSE OF DATA CHANGE.
		PERIODIC	2	THIS IS A PERIODIC UPDATE.
		UNDEFINED	3	
839	001	PPLI TRACK NUMBER AND IDENTITY INDICATOR -----		INDICATES WHETHER OR NOT THE REF- ERENCE TN AND IDENTITY IN THIS MESSAGE WAS RECEIVED PREVIOUSLY IN A PPLI MESSAGE.

FIELD CODING FOR J3.5I

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
839	001	PPLI TRACK NUMBER AND IDENTITY (CONTINUED) INDICATOR -----		
		NO STATEMENT	0	
		SOURCE OF TN AND IDENT- ITY IS FROM PPLI	1	INDICATES THAT THE REFERENCE TN AND IDENTITY IN THIS MESSAGE WAS RECEIVED IN A PPLI MESSAGE.
1860	001	IDENTITY DIFFERENCE INDICATOR -----		
		NO STATEMENT	0	THE IDENTITY DIFFERENCE INDICATOR IS USED TO INDICATE THAT A CONFLICT IN THE IDENTITY OF THE TRACK/ REFERENCE TN IS CURRENTLY BEING EVALUATED BY THE UNIT WITH REPORTING RESPONSIBILITY.
		IDENTITY DIFFERENCE	1	NO IDENTITY DIFFERENCE EXISTS ON REFERENCE TN AT THIS TIME, OR PREVIOUS CONFLICT HAS BEEN RESOLVED. AN IDENTITY DIFFERENCE EXISTS ON REFERENCE TN. THE IDENTITY BEING REPORTED IS THE LATEST IDENTITY LOCALLY HELD BY THE UNIT WITH REPORTING RESPONSIBILITY PRIOR TO THE CONFLICT, NOT THE CONFLICTING IDENTITY CURRENTLY UNDER OPERATOR EVALUATION.
280	001	TRACK QUALITY -----		
		NON REAL-TIME TRACK	0	THE TRACK QUALITY IS STATED AS A NUMERICAL VALUE FROM 1 TO 15 WITH THE HIGHER VALUES INDICATING THE HIGHER TRACK QUALITIES. THE TQ IS BASED ON THE POSITIONAL ACCURACY OF A TRACK REPRESENTED BY AN AREA IN SQUARE DATA MILES WITHIN WHICH IT IS ASSESSED THAT THERE IS A 95% PROBABILITY THAT THE TRACK LIES. A TRACK REPORT IS IDENTIFIED AS A NONREAL-TIME REPORT WITH TQ = 0 IF ANY OF THE FOLLOWING CONDITIONS ARE TRUE: THE TRACK DATA ORIGINATE FROM OTHER THAN A TDS OR JTIDS/MIDS EQUIPPED AIRCRAFT; THE TRACK DATA HAVE BEEN RELAYED FROM ANOTHER SYSTEM BY OTHER THAN A

FIELD CODING FOR J3.5I

(SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
280	001	TRACK QUALITY -----	(CONTINUED)	
		> 2,755 SQUARE DATA MILES	1	REAL-TIME DATA LINK INTERFACE; THE TRACK DATA HAVE BEEN DERIVED FROM OTHER THAN INTEGRATED SENSORS.
		EQUAL TO OR < 2,755 SQUARE DATA MILES	2	
		EQUAL TO OR < 686 SQUARE DATA MILES	3	
		EQUAL TO OR < 439 SQUARE DATA MILES	4	
		EQUAL TO OR < 247 SQUARE DATA MILES	5	
		EQUAL TO OR < 110 SQUARE DATA MILES	6	
		EQUAL TO OR < 27.0 SQUARE DATA MILES	7	
		EQUAL TO OR < 4.4 SQUARE DATA MILES	8	
		EQUAL TO OR < 1.10 SQUARE DATA MILES	9	
		EQUAL TO OR < 0.0281 SQUARE DATA MILES	10	
		EQUAL TO OR < 0.0070 SQUARE DATA MILES	11	
		EQUAL TO OR < 0.0018 SQUARE DATA MILES	12	
		EQUAL TO OR < 0.0004 SQUARE DATA MILES	13	
		EQUAL TO OR < 0.0001 SQUARE DATA MILES	14	
		EQUAL TO OR < 0.00003 SQUARE DATA MILES	15	
1663	001	IDENTITY CONFIDENCE -----		
		UNDEFINED	0 THROUGH 15	
376	007	IDENTITY -----		EXPRESSES THE STANDARD IDENTITY OF A TRACK.
		PENDING	0	A TRACK WHICH HAS NOT BEEN SUBJECTED TO THE IDENTIFICATION PROCESS.
		UNKNOWN	1	AN EVALUATED TRACK WHICH HAS NOT

			FIELD CODING FOR J3.5I	(SHEET 8)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
376	007	IDENTITY -----	(CONTINUED)	
		ASSUMED FRIEND	2	BEEN IDENTIFIED. A TRACK WHICH IS ASSUMED TO BE A FRIEND BECAUSE OF ITS CHARACTERISTICS, BEHAVIOR, OR ORIGIN.
		FRIEND	3	A TRACK BELONGING TO A DECLARED FRIENDLY NATION.
		NEUTRAL	4	A TRACK WHOSE CHARACTERISTICS, BEHAVIOR, ORIGIN, OR NATIONALITY INDICATE THAT IT IS NEITHER SUPPORTING NOR OPPOSING FRIENDLY FORCES.
		SUSPECT	5	A TRACK WHICH IS POTENTIALLY HOSTILE BECAUSE OF ITS CHARACTERISTICS, BEHAVIOR, ORIGIN, OR NATIONALITY.
		HOSTILE	6	A TRACK DECLARED TO BELONG TO ANY OPPOSING NATION, PARTY, GROUP, OR ENTITY, WHICH BY VIRTUE OF ITS BEHAVIOR OR INFORMATION COLLECTED ON IT SUCH AS CHARACTERISTICS, ORIGIN OR NATIONALITY CONTRIBUTES TO THE THREAT TO FRIENDLY FORCES.
		UNDEFINED	7	
376	001	IDENTITY AMPLIFYING DESCRIPTOR -----		A DESCRIPTOR ADDING TO THE STANDARD IDENTITY OF A TRACK INVOLVED IN AN EXERCISE. THE STANDARD IDENTITY IS FRIEND.
		EXERCISE PENDING	0	
		EXERCISE UNKNOWN	1	
		EXERCISE ASSUMED FRIEND	2	
		EXERCISE FRIEND	3	
		EXERCISE NEUTRAL	4	
		JOKER	5	
		FAKER	6	
		UNDEFINED	7	
1861	001	SPECIAL INTEREST INDICATOR -----		THE SPECIAL INTEREST INDICATOR IS USED TO INDICATE THAT THE TRACK IS OF SPECIAL INTEREST.
		NO STATEMENT	0	
		SPECIAL INTEREST	1	THE REFERENCE TN IS OF SPECIAL

			FIELD CODING FOR J3.5I	(SHEET 9)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1861	001	SPECIAL INTEREST INDICATOR -----	(CONTINUED)	INTEREST. (A.) IF THIS FIELD IS SET TO ONE AND THE IDENTITY IS FRIEND THIS TRACK IS DEFINED AS A "KILO". (B.) IF THIS FIELD IS SET TO ONE AND THE TRACK ENVIRONMENT/CATEGORY IS AIR AND THE IDENTITY IS SUSPECT, THE TRACK IS DEFINED AS A "ZOMBIE". (C.) IF THIS FIELD IS SET TO ONE AND THE TRACK ENVIRONMENT/CATEGORY IS SURFACE (MARITIME) AND THE IDENTITY IS SUSPECT, THE TRACK IS DEFINED AS A "TRAVELLER". (D.) THE USE OF THIS INDICATOR WITH OTHER IDENTITIES IS YET TO BE DETERMINED.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: LAND (GROUND) POINT/TRACK EXTENSION WORD

```

: 49: 48 47 46 45 44 43 42 41 40 39 38 37 36 35 34 33 32 31 30 29 28 27: 26: 25:
: PAS:
: ACT: LONGITUDE, 0.0051 MINUTE : SP : DUD:
: : :
: 1 : 22 : 1 : 1 :

```

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50	:		
:												:											:
:	SPEED											:	COURSE										:
:												:											:
:	11											:	9										:

WORD DESCRIPTION

WORD NUMBER: J3.5E0
WORD TITLE: LAND (GROUND) POINT/TRACK EXTENSION WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	10
1906 001	TRACK IDENTIFIER (TRK IFR)	2-	3 2	
281 014	LATITUDE, 0.0051 MINUTE	4-	24 21	
758 001	DISUSED (DUD)	25	1	
756 001	SPARE (SP)	26	1	
282 014	LONGITUDE, 0.0051 MINUTE	27-	48 22	
892 001	PASSIVE/ACTIVE INDICATOR (PAS ACT)	49	1	
371 015	COURSE	50-	58 9	
367 018	SPEED	59-	69 11	

FIELD CODING FOR J3.5E0

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1906	001	TRACK IDENTIFIER -----		SPECIFIES WHETHER THE TRACK BEING REPORTED IS EXTRAPOLATED OR REPORTED BY AN AUTOMATIC TRACKING ALGORITHM.
		NO STATEMENT	0	
		E-TRACK	1	TRACKS EXTRAPOLATED ALONG A KNOWN ROUTE WITHOUT CONTINUED SENSOR CORRELATION, EXCEPT THAT THEY MAY BE MANUALLY CORRELATED WITH A SENSOR RETURN BY THE OPERATOR AT ANY TIME.
		A-TRACK	2	TRACKS AUTOMATICALLY CORRELATED WITH EVERY SENSOR RETURN.
		UNDEFINED	3	
281	014	LATITUDE, 0.0051 MINUTE -----		THE PRECISION IS APPROXIMATELY 31 FEET. IN 90/1,048,575 DEGREE INCREMENTS.
		0 DEGREES	0	
		+90/1,048,575 THROUGH	1 THROUGH 1048575	
		+90 DEGREES NORTH		
		NO STATEMENT	1048576	
		-90 THROUGH	1048577 THROUGH 2097151	
		-90/1,048,575 DEGREES SOUTH		
282	014	LONGITUDE, 0.0051 MINUTE -----		THE PRECISION IS APPROXIMATELY 31 FEET. IN 180/2,097,151 DEGREE INCREMENTS.
		0 DEGREES	0	
		+180/2,097,151 THROUGH	1 THROUGH 2097151	
		+180 DEGREES EAST		
		NO STATEMENT	2097152	
		-180 THROUGH	2097153 THROUGH 4194303	
		-180/2,097,151 DEGREES WEST		
892	001	PASSIVE/ACTIVE INDICATOR -----		THIS INDICATOR IDENTIFIES THE TYPE OF SENSOR AS EITHER PASSIVE OR ACTIVE.
		PASSIVE	0	DATA BEING REPORTED WAS DERIVED FROM A PASSIVE SENSOR SYSTEM.
		ACTIVE	1	DATA BEING REPORTED WAS DERIVED FROM AN ACTIVE SENSOR SYSTEM.

FIELD CODING FOR J3.5E0 (SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
371	015	COURSE ----- 0 THROUGH 359 DEGREES ILLEGAL NO STATEMENT	0 THROUGH 359 360 THROUGH 510 511	INDICATES THE DIRECTION OF TRAVEL OF AN OBJECT IN DEGREES WITH RESPECT TO TRUE NORTH. IN 1 DEGREE INCREMENTS.
367	018	SPEED ----- 0 THROUGH 4092 DATA MILES PER HOUR NO STATEMENT	0 THROUGH 2046 2047	THE RATE OF CHANGE OF POSITION. EXPRESSES GROUND SPEED IN 2 DATA MILES PER HOUR INCREMENTS.

.....

WORD TITLE: LAND (GROUND) POINT/TRACK CONTINUATION WORD 1

:	24	23	22	21	20	19	18	17	16	15	14	13:	12	11	10	09	08:	07:	06	05	04	03	02:	01	00:				
:													:						:	LST:	CONTINUATION WORD					:	WORD	:	
:	MODE II CODE												:	MODE I CODE					:	IND:	LABEL					:	FORMAT	:	
:													:						:	:						:	:	:	
:	12												:	5					:	1	:	5					:	2	:

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
													MODE III CODE											
LAND (GROUND) SPECIFIC TYPE													LAND (GROUND) PLATFORM											
13													12											

:	69	68	67	66	65:	64	63	62	61	60	59:	58	57	56:	55	54:	53	52	51	50		
:						:						:	TIME			:	LAND (GROUND)					
:	HOUR					:	MINUTE					:	FUNCTION			:	SP		:	PLATFORM ACTIVITY		
:						:						:				:			:	---		
:						:						:				:	:SP :		:	--->		
:	5					:	6					:	3			:	2		:			

WORD DESCRIPTION

WORD NUMBER: J3.5C1

WORD TITLE: LAND (GROUND) POINT/TRACK CONTINUATION WORD 1

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550 001		WORD FORMAT	0-	1 2	01
1551 001		CONTINUATION WORD LABEL	2-	6 5	00001
267 001		LAND (GROUND) SPECIFIC TYPE	7	1	
		INDICATOR (LST IND)			
293 003		MODE I CODE	8-	12 5	SEE NOTE 1.
294 002		MODE II CODE	13-	24 12	SEE NOTE 1.
295 002		MODE III CODE	25-	36 12	SEE NOTE 1.
298 001		MODE IV INDICATOR (M4 IND)	37-	38 2	SEE NOTE 1.
839 002		PPLI IFF/SIF INDICATOR (PP IFF)	39-	40 2	
1797 004		LAND (GROUND) PLATFORM	41-	46 6	
1798 004		LAND (GROUND) PLATFORM	47-	53 7	
		ACTIVITY			
810 001		LAND (GROUND) SPECIFIC TYPE	41-	52 12	
756 001		SPARE (SP)	53	1	
756 002		SPARE (SP)	54-	55 2	
1681 001		TIME FUNCTION	56-	58 3	
797 004		MINUTE	59-	64 6	
792 001		HOURL	65-	69 5	

MIL-STD-6016B

J3.5C1 WORD NOTES

TITLE: Land (Ground) Point/Track Continuation Word 1

NOTE 1 - JUs with the appropriate IFF/SIF equipment shall implement Mode I Code, Mode II Code, Mode III Code, and Mode IV Indicator. JUs that can only interface two modes at one time shall transmit only the appropriate codes.

FIELD CODING FOR J3.5C1

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
267	001	LAND (GROUND) SPECIFIC TYPE INDICATOR -----		INDICATES WHETHER LAND (GROUND) PLATFORM/LAND (GROUND) PLATFORM ACTIVITY OR LAND (GROUND) SPECIFIC TYPE IS BEING REPORTED.
		LAND (GROUND) PLATFORM/ LAND (GROUND) PLATFORM ACTIVITY BEING REPORTED	0	
		LAND (GROUND) SPECIFIC TYPE BEING REPORTED	1	
293	003	MODE I CODE -----		PROVIDES MODE I BEACON REPLY INFORMATION. WITHIN THE MODE FIELD, SIF CODES ARE IN THE ORDER A4 A2 A1 B2 B1. THE LEAST SIGNIFICANT DIGIT CANNOT BE GREATER THAN 3. THIS CODE CANNOT BE ASSIGNED AS AN OPERATIONAL CODE. INDICATES THERE ARE NO DATA FOR TRANSMISSION.
		0 (NO STATEMENT)	00 (OCTAL)	
		1	01 (OCTAL)	
		2	02 (OCTAL)	
		3	03 (OCTAL)	
		4	10 (OCTAL)	
		5	11 (OCTAL)	
		6	12 (OCTAL)	
		7	13 (OCTAL)	
		8	20 (OCTAL)	
		9	21 (OCTAL)	
		10	22 (OCTAL)	
		11	23 (OCTAL)	
		12	30 (OCTAL)	
		13	31 (OCTAL)	
		14	32 (OCTAL)	
		15	33 (OCTAL)	
		16	40 (OCTAL)	
		17	41 (OCTAL)	
		18	42 (OCTAL)	
		19	43 (OCTAL)	
		20	50 (OCTAL)	
		21	51 (OCTAL)	
		22	52 (OCTAL)	
		23	53 (OCTAL)	
		24	60 (OCTAL)	
		25	61 (OCTAL)	

FIELD CODING FOR J3.5C1

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
293	003	MODE I CODE -----	(CONTINUED)	
		26	62 (OCTAL)	
		27	63 (OCTAL)	
		28	70 (OCTAL)	
		29	71 (OCTAL)	
		30	72 (OCTAL)	
		31	73 (OCTAL)	
294	002	MODE II CODE -----		PROVIDES MODE II BEACON REPLY INFORMATION.
		NO STATEMENT	0	THIS CODE CANNOT BE ASSIGNED AS AN OPERATIONAL CODE. INDICATES THERE ARE NO DATA FOR TRANSMISSION.
		1 THROUGH 7777 (OCTAL)	0001 THROUGH 7777 (OCTAL)	WITHIN THE FIELD, SIF CODES ARE IN THE ORDER A, B, C, D WITH EACH TRIAD IN THE ORDER 4, 2, 1.
295	002	MODE III CODE -----		PROVIDES MODE III BEACON REPLY INFORMATION.
		NO STATEMENT	0	THIS CODE CANNOT BE ASSIGNED AS AN OPERATIONAL CODE. INDICATES THERE ARE NO DATA FOR TRANSMISSION.
		1 THROUGH 7777 (OCTAL)	0001 THROUGH 7777 (OCTAL)	WITHIN THE FIELD, SIF CODES ARE IN THE ORDER A, B, C, D WITH EACH TRIAD IN THE ORDER 4, 2, 1.
298	001	MODE IV INDICATOR -----		THE MODE IV BEACON REPLY.
		NOT INTERROGATED/NO STATEMENT	0	
		INTERROGATED, NO RESPONSE	1	
		INTERROGATED, INVALID RESPONSE	2	
		INTERROGATED, VALID RESPONSE	3	
839	002	PPLI IFF/SIF INDICATOR -----		INDICATES WHETHER OR NOT THE IFF/SIF DATA IN THIS MESSAGE WAS RECEIVED PREVIOUSLY IN A PPLI MESSAGE.
		NO STATEMENT	0	
		SOURCE OF MODE II CODE IS FROM PPLI	1	THE MODE II CODE IN THIS MESSAGE WAS RECEIVED PREVIOUSLY IN A PPLI MESSAGE.

FIELD CODING FOR J3.5C1

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
839	002	PPLI IFF/SIF INDICATOR -----	(CONTINUED)	
		SOURCE OF ALL IFF DATA IS FROM PPLI	2	ALL IFF/SIF DATA IN THIS MESSAGE WAS RECEIVED PREVIOUSLY IN A PPLI MESSAGE.
		UNDEFINED	3	
1797	004	LAND (GROUND) PLATFORM -----		THE LAND (GROUND) PLATFORM FIELD ALONG WITH THE LAND (GROUND) PLATFORM ACTIVITY FIELD FURTHER DEFINES THE IDENTITY OF A LAND(GROUND) POINT OR TRACK.
		NO STATEMENT	0	
		TROOP CONCENTRATION/UNIT	1	
		HEADQUARTER COMPLEX	2	
		COMMAND/CONTROL/COMMAND AND CONTROL CENTER	3	
		ASSEMBLY AREA	4	
		INSTALLATION/FACILITY, MILITARY	5	
		INSTALLATION/FACILITY, CIVILIAN	6	
		AIRFIELD/AIRBASE	7	
		PORT/HARBOR FACILITY	8	
		STORAGE SITE	9	
		TACTICAL POSITION	10	
		FORTIFICATION	11	
		INTERSECTION	12	
		CONVOY	13	
		COMBAT VEHICLE	14	
		COMBAT SUPPORT VEHICLE	15	
		VEHICLE, OTHER	16	
		TANK	17	
		TRAIN	18	
		REMOTELY PILOTED VEHICLE	19	
		MORTAR	20	
		FIELD ARTILLERY	21	
		AIR DEFENSE ARTILLERY	22	
		ROCKET LAUNCHER	23	
		MISSILE LAUNCHER	24	
		SPECIAL WEAPON	25	
		BRIDGE	26	
		BUILDING/STRUCTURE	27	
		POWER FACILITY	28	
		RAIL FACILITY	29	

FIELD CODING FOR J3.5C1

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1797	004	LAND (GROUND) PLATFORM -----	(CONTINUED)	
		TERRAIN	30	
		NAVAID SITE	31	
		COMMUNICATION SITE	32	
		RADAR SITE	33	
		ANTENNA/EMITTER	34	
		BUFFER CENTER	35	
		ELECTRONIC WARFARE SITE	36	
		SURVEILLANCE SITE	37	
		BRIDGING EQUIPMENT	38	
		MINE WARFARE EQUIPMENT	39	
		SURFACE-TO-AIR MISSILE (SAM) SITE	40	
		MARITIME HEADQUARTERS	41	
		AIR SUPPORT RADAR TEAM (ASRT)	42	
		DIRECT AIR SUPPORT CENTER (DASC)	43	
		FORWARD AIR CONTROL PARTY (FACP)	44	
		BATTALION OPERATIONS CENTER (BOC)	45	
		TACTICAL DATA SYSTEM (TDS)	46	
		DECOY	47	
		TRACKED VEHICLE	48	
		THEATER HIGH ALTITUDE AREA DEFENSE (THAAD)	49	
		JOINT TACTICAL GROUND STATION (JTAGS)	50	
		ARMOR	51	
		CAVALRY	52	
		ENGINEER	53	
		AIRBORNE/SPECIAL OPERATIONS	54	
		AVIATION	55	
		AIR DEFENSE SITE	56	
		BALLISTIC MISSILE DEFENSE SITE	57	
		UNDEFINED	58 THROUGH 62	
		RESET TO NO STATEMENT	63	

FIELD CODING FOR J3.5C1

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1798	004	LAND (GROUND) PLATFORM ACTIVITY -----		THE LAND (GROUND) PLATFORM ACTIVITY FIELD ALONG WITH THE LAND (GROUND) PLATFORM FIELD FURTHER DEFINES THE IDENTITY OF A LAND (GROUND) POINT OR TRACK.
		NO STATEMENT	0	
		HOLDING	1	
		DELAYING	2	
		MOVING	3	
		DETECTING	4	
		ACQUIRING	5	
		ENGAGING	6	
		ADVANCING	7	
		ANTI-AIR ATTACK	8	
		AMPHIBIOUS ASSAULT	9	
		FIRING/LAUNCHING	10	
		CONVENTIONAL ATTACK/ ASSAULT	11	
		SPECIAL WEAPONS ATTACK	12	
		DEMOLITION	13	
		OVER THE HORIZON TARGETING	14	
		TRANSITING	15	
		RETURN TO BASE	16	
		DEPLOYING	17	
		EMISSION CONTROL (EMCON)	18	
		RIVER CROSSING	19	
		LOADING	20	
		TOWING	21	
		BUILDING FORTIFICATION/ BARRIER	22	
		CLEARING BARRIER	23	
		RECOVERING EQUIPMENT	24	
		MINE SWEEPING	25	
		MINE LAYING	26	
		JAMMING	27	
		RECONNAISSANCE/ PATROLLING	28	
		SEARCH AND RESCUE (SAR)	29	
		TRAINING	30	
		MEDICAL EVACUATION (MEDEVAC)	31	
		ESCORTING	32	
		TRANSPORTING	33	
		SCREENING	34	

FIELD CODING FOR J3.5C1

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1798	004	LAND (GROUND) PLATFORM ACTIVITY -----	(CONTINUED)	
		SUPPORTING	35	
		REPAIRING	36	
		REFUELING	37	
		NEUTRALIZING	38	
		TARGETING	39	
		BYPASSING	40	
		CLOSING	41	
		CONCENTRATING	42	
		DEFENDING	43	
		DISENGAGING	44	
		INFILTRATING	45	
		INTERDICTING	46	
		LANDING	47	
		OCCUPYING	48	
		DISPERSING	49	
		SUPPLY/RESUPPLY	50	
		RETROGRADE/WITHDRAWING	51	
		TRANSMITTING	52	
		ELECTRONIC WARFARE	53	
		SUPPORT (ES)		
		ELECTRONIC ATTACK (EA)	54	
		MOVING EQUIPMENT	55	
		POWER UP AND MANNED, NOT EMITTING	56	
		PREPARATION FOR LAUNCH	57	
		SITE SHUT DOWN TO UNPOWERED STATUS	58	
		UNDEFINED	59 THROUGH 114	
		LAND (GROUND) ACTIVITY 1 THROUGH 12	115 THROUGH 126	A SPECIFIC LAND (GROUND) MISSION DEFINED BY THE JOINT OPERATIONAL COMMANDER.
		RESET TO NO STATEMENT	127	
810	001	LAND (GROUND) SPECIFIC TYPE -----		THE SPECIFIC TYPE OF POINT OR TRACK WITH AN ENVIRONMENT/CATEGORY OF LAND (GROUND).
		NO STATEMENT	0	
		TOW	1	
		DRAGON	2	
		LANCE	3	
		SHILLEAGH	4	
		SERGEANT	5	

FIELD CODING FOR J3.5C1

(SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		AMMUNITION	6	
		POL	7	
		OBSERVATION POSTS	8	
		RADIO DIRECTION FINDER	9	
		RIVER	10	
		STREAM	11	
		LAKE	12	
		MARSH/SWAMP	13	
		MOUNTAIN	14	
		HILLTOP	15	
		RIDGE	16	
		DEPRESSION	17	
		VALLEY	18	
		CAVE	19	
		BRIDGE	20	
		DAM	21	
		BUILDING	22	
		VILLAGE	23	
		TOWN	24	
		ROAD INTERSECTION	25	
		HOSPITAL	26	
		HAWK	27	
		I-HAWK	28	
		PATRIOT	29	
		NIKE	30	
		REDEYE	31	
		STINKER	32	
		HELLFIRE	33	
		PERSHING	34	
		JEEP	35	
		CAR	36	
		MOTORCYCLE	37	
		BICYCLE	38	
		AMPHIBIOUS VEHICLE	39	
		RIVER CROSSING EQUIPMENT	40	
		MECHANIZED MINE SWEEPER	41	
		MOBILE RADAR	42	
		SMOKE GENERATOR	43	
		(SSSB) SHIP SHORE SHIP	44	
		BUFFER		
		(RADIL) ROCC AWACS	45	
		DIGITAL INTERFACE LINK		

FIELD CODING FOR J3.5C1

(SHEET 8)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		(ASIT) ADAPTABLE SURFACE	46	
		INTERFACE TERMINAL		
		(AEGIS) AEW GROUND	47	
		INTERFACE SEGMENT		
		AMBULANCE	48	
		BIOLOGICAL WEAPONS	49	
		CHEMICAL WEAPONS	50	
		NUCLEAR WEAPONS	51	
		ENGINEER VEHICLES	52	
		GENERATOR	53	
		JAMMERS	54	
		MAINTENANCE VEHICLE	55	
		MULTIPLE ROCKET LAUNCHER	56	
		RADIO	57	
		REMOTE SENSOR	58	
		SELF PROPELLED ARTILLERY	59	
		TACTICAL BRIDGE	60	
		TOWED ARTILLERY GUN	61	
		RECOILLESS RIFLE	62	
		(TACCP) TACTICAL COMMAND	63	
		POST		
		BRIGADE	64	
		CORPS	65	
		GROUP	66	
		DIVISION	67	
		REGIMENT	68	
		BATTALION	69	
		COMPANY	70	
		PLATOON	71	
		SQUADRON	72	
		AIRBASE	73	
		WING	74	
		ANTI-AIRCRAFT GUN	75	
		AIR DEFENSE ARTILLERY	76	
		GUN		
		MORTAR	77	
		FLAMETHROWER	78	
		TSC/MOCC/MARITIME	79	
		HEADQUARTERS		
		MAIN BATTLE TANK	80	
		MEDIUM TANK	81	
		LIGHT TANK	82	
		TRAIN	83	

FIELD CODING FOR J3.5C1

(SHEET 9)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		ARMORED PERSONNEL	84	
		VEHICLE		
		ARMORED INFANTRY	85	
		FIGHTING VEHICLE		
		LIGHT TRUCK	86	
		MEDIUM TRUCK	87	
		HEAVY TRUCK	88	
		TANK TRANSPORTER	89	
		DUMMY	90	
		TRAP	91	
		POINT TARGET	92	
		EA SITE	93	
		ARMORED PERSONNEL	94	
		CARRIER		
		ARMORED INFANTRY	95	
		FIGHTING VEHICLE		
		GCI SITE	96	
		CRC	97	
		TACC (AF)	98	
		CRP	99	
		TACC (MC)	100	
		MPC	101	
		TAOC	102	
		AADCCS (AN/TSQ-73)	103	
		DASC	104	
		FACP	105	
		FASC	106	
		AADCP	107	
		ASRT	108	
		NCC	109	
		RCC	110	
		ROCC	111	
		DC	112	
		WOC	113	
		(ASOC) AIR SUPPORT	114	
		OPERATIONS CENTER		
		(TCO) TACTICAL COMBAT	115	
		OPERATIONS CENTER		
		(TOC) TACTICAL	116	
		OPERATIONS CENTER		
		(ARMY)		
		CHAPPARAL	117	
		FIRE DIRECTION CENTER	118	

FIELD CODING FOR J3.5C1

(SHEET 10)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE -----	(CONTINUED)	
		FIRE UNIT	119	
		DIVARTY	120	
		BATTERY	121	
		SELF-PROPELLED ARTILLERY	122	
		(GOC) GROUND OPERATIONS CENTER	123	
		(ICC) INFORMATION COORDINATION CENTER	124	
		(BOC) BATTERY OPERATIONS CENTER	125	
		(ECS) ENGAGEMENT CONTROL STATION	126	
		(PCP) PLATOON COMMAND POST	127	
		(CRG) COMMUNICATIONS RELAY GROUP	128	
		TUNNELS	129	
		RAILYARDS	130	
		BENCHMARK	131	
		TROOP	132	
		LANDING ZONE	133	
		DROP ZONE	134	
		ASSEMBLY OR STAGING AREA	135	
		DECONTAMINATION SITE	136	
		RE-ENTRY POINT/LINE CROSSING AREA FOR RECON PATROLS	137	
		SAM	138	
		SSM	139	
		ANTI-TANK WEAPON	140	
		DIRECT SUPPORT	141	
		GENERAL SUPPORT	142	
		INTERCEPTION	143	
		BLOCKING	144	
		REINFORCING	145	
		REDEPLOYMENT	146	
		POLICING	147	
		INTRUDING	148	
		PREPARING BARRIER	149	
		DUMPING EQUIPMENT	150	
		RELIEF	151	
		CONVOY	152	
		ANTI-AIRCRAFT	153	

FIELD CODING FOR J3.5C1

(SHEET 11)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		AIR DEFENSE ARTILLERY	154	
		ARTILLERY	155	
		SURVEILLANCE	156	
		PICKETING	157	
		LOGISTICS SUPPORT	158	
		SEARCH	159	
		DIRECT ARTILLERY SUPPORT	160	
		GENERAL ARTILLERY	161	
		SUPPORT		
		MAINTAINING LINE OF	162	
		COMMUNICATION		
		COMMITTING	163	
		COUNTER-ATTACK	164	
		ELECTRONIC WARFARE	165	
		THREATEN	166	
		DESTROY	167	
		CONTACT	168	
		EVALUATION	169	
		TRANSPORTER	170	
		ARMORED VEHICLE	171	
		GUN	172	
		HALF TRACK	173	
		COMMUNICATIONS EQUIPMENT	174	
		TARGET	175	
		AIR DEFENSE SITE	176	
		FIM-92 STINGER	177	
		NIM-23 HAWK	178	
		MIM-42 REDEYE	179	
		MIM-72 CHAPARRAL	180	
		MIM-104 PATRIOT	181	
		RIM-2 TERRIER	182	
		RIM-7 SEA SPARROW	183	
		RIM-8 TALOS	184	
		RIM-24 TARTAR	185	
		RIM-66 STANDARD MISSILE	186	
		RIM-67 STANDARD MISSILE	187	
		BLOWPIPE	188	
		DISUSED	189 THROUGH 190	
		SEA DART	191	
		DISUSED	192 THROUGH 193	
		CROTALE	194	
		RAPIER	195	
		RBS-70/GIRAFFE	196	

FIELD CODING FOR J3.5C1

(SHEET 12)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		SAM BLOODHOUND	197	
		SAM ROLAND	198	
		SA-2 GUIDELINE	199	
		SA-3 GOA	200	
		SA-4 GANEF	201	
		SA-N-3 GOBLET	202	
		SA-5 GAMMON	203	
		SA-N-4 GECKO	204	
		SA-6 GAINFUL	205	
		SA-N-6 GRUMBLE	206	
		SA-7 GRAIL	207	
		SA-8 GECKO	208	
		SA-9 GASKIN	209	
		SA-10 GRUMBLE	210	
		SA-11 GADFLY	211	
		SA-12	212	
		SA-13 GOPHER	213	
		MISTRAL	214	
		SA-N-7 GADFLY	215	
		SA-N-8 GREMLIN	216	
		SA-14 GREMLIN	217	
		SA-16 GIMLET	218	
		SA-X-17	219	
		TOC (THAAD)	220	
		SSI (THAAD)	221	
		LCS (THAAD)	222	
		LAUNCHER (THAAD)	223	
		TMD-GBR (THAAD)	224	
		JTAGS	225	
		ADTOC/BN	226	
		ADTOC/BDE	227	
		ADCP	228	
		SM-2 BLOCK II	229	
		SM-2 BLOCK III	230	
		SM-2 BLOCK IIIA	231	
		SM-2 BLOCK IIIB	232	
		SM-2 BLOCK IV	233	
		SM-2 BLOCK IVA	234	
		SM-3 LEAP	235	
		SA-N-5 GRAIL	236	
		SA-N-11 GRISOM	237	
		SA-12A GLADIATOR	238	
		SA-12B GIANT	239	

FIELD CODING FOR J3.5C1

(SHEET 13)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		SA-14 GREMLIN	240	
		SA-15 GAUNTLET	241	
		SA-17 GRIZZLY	242	
		SA-N-12 GRIZZLY	243	
		SA-18 GROUSE	244	
		SA-19 GRISOM	245	
		RIM-116 RAM	246	
		ADATS	247	
		JAVELIN	248	
		STARBURST	249	
		STARSTREAK	250	
		ASPIDE	251	
		FRONT DOOR	252	
		ROLAND II	253	
		AKASH	254	
		ANZA	255	
		ANZA II	256	
		CSA-1	257	
		CSA-2	258	
		CSA-4	259	
		CSA-5	260	
		FM-80	261	
		HN-5	262	
		NK-7	263	
		NK-16	264	
		PANTZYR	265	
		RAPIER 2000/JERNAS	266	
		RBS-90	267	
		SAKR	268	
		SAVA	269	
		SHANINE	270	
		SKYGUARD ASPIDE	271	
		SPADA	272	
		TAM SAM	273	
		TIGERCAT	274	
		VANGUARD	275	
		SA-N-1 GOA	276	
		SA-N-9 GAUNTLET	277	
		SA-N-10	278	
		ALBATROS/ASPIDE	279	
		SM-1	280	
		SA-2 IRAQ MOD	281	
		SA-2 NORTH KOREA RO	282	

FIELD CODING FOR J3.5C1

(SHEET 14)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE -----	(CONTINUED)	
		AEGIS-TI	283	
		MASURGS	284	
		ROCK CAKE	285	
		SEA INDIGO	286	
		TANSAM	287	
		TOKEN A/D	288	
		GUARDSMAN	289	
		SILKWORM	290	
		SNOW DRIFT 11/17	291	
		TIGER S	292	
		TIGER G	293	
		TUBE ARM SA-11	294	
		SEACAT 262/903/904	295	
		AN/MPQ-4	296	
		AN-TPQ-36	297	
		AN/TPS-25	298	
		CYMBERLINE	299	
		PORK TROUGH 1	300	
		RASIT	301	
		SNAR-6	302	
		TALL MIKE	303	
		AN/FPN-33/36/40	304	
		AN/TPN-12/17	305	
		CPN-4, FPN-16/22	306	
		RP-2E	307	
		RP-4G	308	
		THD-1010/1013	309	
		TPN-8/14/18TSQ-7	310	
		TWO SPOT	311	
		CSA-X-2	312	
		ASR-0	313	
		FALCON-G	314	
		MARCON LN66TPS66	315	
		SHEET BEND	316	
		WALL RUST A/B	317	
		DON-2	318	
		DONKAY/PALM FROND	319	
		EYE SHIELD	320	
		MARELD	321	
		PEEL PAIR	322	
		POT HEAD	323	
		RACAL-DECCA	324	
		RICE FIELD	325	

FIELD CODING FOR J3.5C1

(SHEET 15)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE -----	(CONTINUED)	
		RICE SCREEN	326	
		RICE CUP	327	
		SQUARE TIE	328	
		SS-N-2	329	
		STRUT CURVE	330	
		STRUT PAIR	331	
		BOFI	332	
		CORN CAN	333	
		DRUM TILT	334	
		ELDORADO	335	
		FLAP WHEEL	336	
		FLEDERMAUS	337	
		FLYCATCHER	338	
		GEPARD	339	
		GUN DISH	340	
		SPAAMG	341	
		TEAMPLAY	342	
		TEAMWORK	343	
		VULCAN	344	
		9LV 200	345	
		AN/SPG-50	346	
		BASS TILT	347	
		GOALKEEPER	348	
		HAWK SCREECH	349	
		KITE SCREECH A/B	350	
		OWL SCREECH	351	
		MARK 68 FCS	352	
		MK 57/63 GFCS	353	
		MK-86 GFCS	354	
		MUFF COB	355	
		SIGNAAL STIR 180	356	
		SUN VISOR	357	
		TOP BOW	358	
		TYPE 341	359	
		VEGA	360	
		WM-20 SERIES	361	
		MARCONI S613	362	
		THIN SKIN	363	
		AN/FPS-77	364	
		MRL-1	365	
		MRL-4/5	366	
		BIG BIRD	367	
		SIDE NET	368	

FIELD CODING FOR J3.5C1

(SHEET 16)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		ODD LOT/PAIR/GROUP	369	
		FIRE WHEEL/MOD	370	
		BARLOCK	371	
		FIRECAN/WHIFF	372	
		GIN SLING	373	
		FRUSKA GORA	374	
		TIN SHIELD	375	
		BIG BAR/MESH	376	
		SS-N-S SCOOP PAIR	377	
		SGR-105 DA-01/00	378	
		CROSS SLOT	379	
		BACK NET/TRAP	380	
		GATE POLE/HIGH/POST	381	
		TOP LOT	382	
		RICE CAKE	383	
		JY-14/9	384	
		TIN TRAP	385	
		HEAD NET A/B/C	386	
		SLIM/SEA/HAIR NET	387	
		LOW SIEVE	388	
		EGG CUP	389	
		CUT WEB	390	
		SKYWATCH	391	
		HALF PLATE	392	
		SKIN HEAD	393	
		SIEVE FAMILY	394	
		SO-A	395	
		HIGH SHELL	396	
		AN/FPS-6/89	397	
		DECCA HF200	398	
		MARCONI 5244	399	
		TYPE 88 MK 1	400	
		MARCONI S-247	401	
		AN/MPN-11	402	
		RAT-31S	403	
		AA4 MK 6/7	404	
		AN/TPS-43	405	
		SCR-584	406	
		AN/TPS-48	407	
		MARCONI S-1006/269	408	
		PALMIER	409	
		FIREFINDER LR	410	
		VOLEX III/IV	411	

5.1-752

MIL-STD-6016B

FIELD CODING FOR J3.5C1

(SHEET 17)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE -----	(CONTINUED)	
		THD-1940	412	
		HADR (HR-3000)	413	
		AN/RPS-70/72/75	414	
		MPDR-18/S	415	
		WATCHMAN	416	
		MARCONI S-631/647	417	
		MARCONI S-706/711/712	418	
		AN/TPS-73	419	
		TRS-22XX	420	
		AN/SPS-8	421	
		DECCA AWS-1	422	
		MK-26	423	
		AN/SPS-48	424	
		RAN-7S	425	
		SEA TIGER	426	
		DA-08/2LS	427	
		AWS-9 (TYPE 996)	428	
		DA-05/00	429	
		MPDR-45	430	
		TOP STEER/PLATE	431	
		STRIKE OUT	432	
		SPONGE CAKE	433	
		NC1 ROLAND	434	
		NC1 MISTRAL	435	
		FDOC	436	
		MCT	437	
		CETAC	438	
		ISARD	439	
		UNDEFINED	440 THROUGH 4000	
		WAYPOINT	4001	
		STRIKE INITIAL POINT	4002	
		UNDEFINED	4003 THROUGH 4093	
		RESET TO NO STATEMENT	4094	
		UNDEFINED	4095	
1681	001	TIME FUNCTION -----		USED IN CONJUNCTION WITH THE MINUTE AND HOUR FIELDS TO DESCRIBE THE TIME FUNCTION ASSOCIATED WITH THE REPORTED TIME.
		NO STATEMENT	0	
		ACTIVATION TIME	1	
		DEACTIVATION TIME	2	
		ARRIVAL TIME	3	

5.1-753

MIL-STD-6016B

FIELD CODING FOR J3.5C1

(SHEET 18)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1681	001	TIME FUNCTION -----	(CONTINUED)	
		DEPARTURE TIME	4	
		TIME POINT ESTABLISHED	5	THE TIME THE REPORTED POSITION FOR THE POINT WAS ESTABLISHED. THIS MAY BE A TIME PRIOR TO DATA ENTRY.
		NON-OP TIME	6	THE TIME THE SITE IS EXPECTED TO BECOME LESS THAN FULLY OPERATIONAL.
		OP TIME	7	THE TIME THE SITE IS EXPECTED TO RETURN FULLY OPERATIONAL.
797	004	MINUTE -----		THE MINUTE OF THE HOUR.
		0 THROUGH 59	0 THROUGH 59	
		ILLEGAL	60 THROUGH 62	IN ONE MINUTE INCREMENTS.
		NO STATEMENT	63	
792	001	HOUR -----		EXPRESSES TIME OF DAY OR A PERIOD OF TIME IN HOURS.
		0 HOUR	0	
		1 THROUGH 23 HOURS	1 THROUGH 23	IN ONE HOUR INCREMENTS.
		ILLEGAL	24 THROUGH 30	
		NO STATEMENT	31	

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: LAND (GROUND) POINT/TRACK CONTINUATION WORD 2

24	23	22	21:	20	19	18	17	16:	15	14	13	12	11	10	09	08	07:	06	05	04	03	02:	01	00:		
UTM MSC			:	UTM MSR			:	TIME TAG, TIME OF VALIDITY									:	CONTINUATION WORD LABEL					:	WORD FORMAT		:
5			:	5			:	9									:	5					:	2		:

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25	
<---	:	SP	:	UNIVERSAL TRANSVERSE MERCATOR 10-METER NORTHING														:	SP	:	UTM GZR				:--->
	:	2	:	14														:	1	:	5				:

:	69	68	67	66	65	64	:	63	62	:	61	60	59	58	57	56	55	54	53	52	51	50
:	UNIVERSAL TRANSVERSE						:	UNIVERSAL TRANSVERSE MERCATOR 10-METER EASTING														
:	MERCATOR GRID ZONE						:	SP	:													
:	COLUMN						:		:													
:	6						:	2	:	14												

WORD DESCRIPTION

WORD NUMBER: J3.5C2

WORD TITLE: LAND (GROUND) POINT/TRACK CONTINUATION WORD 2

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550 001		WORD FORMAT	0-	1 2	01
1551 001		CONTINUATION WORD LABEL	2-	6 5	00010
826 001		TIME TAG, TIME OF VALIDITY (TTG TOV)	7-	15 9	
816 001		UNIVERSAL TRANSVERSE MERCATOR 100,000 METER SQUARE ROW (UTM MSR)	16-	20 5	
821 001		UNIVERSAL TRANSVERSE MERCATOR 100,000 METER SQUARE COLUMN (UTM MSC)	21-	25 5	
825 001		UNIVERSAL TRANSVERSE MERCATOR GRID ZONE ROW (UTM GZR)	26-	30 5	
756 001		SPARE (SP)	31	1	
820 001		UNIVERSAL TRANSVERSE MERCATOR 10-METER NORTHING	32-	45 14	
756 002		SPARE (SP)	46-	47 2	
819 001		UNIVERSAL TRANSVERSE MERCATOR 10-METER EASTING	48-	61 14	
756 002		SPARE (SP)	62-	63 2	
818 001		UNIVERSAL TRANSVERSE MERCATOR GRID ZONE COLUMN (UTM GZC)	64-	69 6	

FIELD CODING FOR J3.5C2

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
826	001	TIME TAG, TIME OF VALIDITY -----		IDENTIFIES THE GROUP OF 24 (8 TIME SLOTS * 3 SETS) CONSECUTIVE TIME SLOT SETS DURING WHICH THE UTM/UPS POSITION IS VALID. EACH VALUE DEFINES A TIME SPAN OF 24 * 0.0078125 SECONDS = 0.1875 SECONDS. THE VALUE CORRESPONDS TO BITS 5 THROUGH 13 OF THE TIME SLOT NUMBER THUS DESIGNATING A GROUP OF 24 CONSECUTIVE TIME SLOT NUMBERS IDENTIFIED BY BITS 2 THROUGH 4 (8 TIME SLOTS) AND BITS 0 THROUGH 1 (3 SETS; A, B, AND C) OF THE TIME SLOT NUMBER. EACH VALUE CAN DEFINE EIGHT PERIODS DURING AN EPOCH DEPENDING ON THE VALUE OF BITS 14 THROUGH 16 OF THE TIME SLOT NUMBER.
		NUMERIC	0 THROUGH 511	
816	001	UNIVERSAL TRANSVERSE MERCATOR 100,000 METER SQUARE ROW -----		THE NORTH-SOUTH DESIGNATION FOR A 100,000 METER GRID OF A SPECIFIED UNIVERSAL TRANSVERSE MERCATOR (UTM) GRID ZONE ROW.
		NO STATEMENT	0	
		A	1	
		B	2	
		C	3	
		D	4	
		E	5	
		F	6	
		G	7	
		H	8	
		ILLEGAL	9	BIT CODE 9 IS ILLEGAL BECAUSE THE GRID DOES NOT USE THE LETTER I.
		J	10	
		K	11	
		L	12	
		M	13	
		N	14	
		ILLEGAL	15	BIT CODE 15 IS ILLEGAL BECAUSE THE GRID DOES NOT USE THE LETTER O.
		P	16	
		Q	17	
		R	18	

FIELD CODING FOR J3.5C2

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
816	001	UNIVERSAL TRANSVERSE MERCATOR 100,000 METER SQUARE ROW -----	(CONTINUED)	
		S	19	
		T	20	
		U	21	
		V	22	
		W	23	
		X	24	
		Y	25	
		Z	26	
		ILLEGAL	27 THROUGH 31	
821	001	UNIVERSAL TRANSVERSE MERCATOR 100,000 METER SQUARE COLUMN -----		THE EAST-WEST DESIGNATION FOR A 100,000-METER GRID OF A SPECIFIED UNIVERSAL TRANSVERSE MERCATOR (UTM) GRID ZONE COLUMN.
		NO STATEMENT	0	
		A	1	
		B	2	
		C	3	
		D	4	
		E	5	
		F	6	
		G	7	
		H	8	
		ILLEGAL	9	BIT CODE 9 IS ILLEGAL BECAUSE THE GRID DOES NOT USE THE LETTER I.
		J	10	
		K	11	
		L	12	
		M	13	
		N	14	
		ILLEGAL	15	BIT CODE 15 IS ILLEGAL BECAUSE THE GRID DOES NOT USE THE LETTER O.
		P	16	
		Q	17	
		R	18	
		S	19	
		T	20	
		U	21	
		V	22	
		W	23	
		X	24	
		Y	25	

FIELD CODING FOR J3.5C2

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
821	001	UNIVERSAL TRANSVERSE MERCATOR 100,000 METER SQUARE COLUMN -----	(CONTINUED)	
		Z	26	
		ILLEGAL	27 THROUGH 31	
825	001	UNIVERSAL TRANSVERSE MERCATOR GRID ZONE ROW -----		IN THE UNIVERSAL TRANSVERSE MERCATOR (UTM) SYSTEM, AN AREA ON THE EARTH'S SURFACE FROM 80 DEGREES SOUTH LATITUDE AND 84 DEGREES NORTH LATITUDE MEASURING 8 DEGREES NORTH-SOUTH WHICH EXTENDS EAST- WEST FOR 360 DEGREES ORIGINATING AT THE 180-DEGREE MERIDIAN (EXCEPT THE ROW OR BAND FROM 72 TO 84 DEGREES NORTH, WHICH COVERS 12 DEGREES NORTH-SOUTH).
		NO STATEMENT	0	
		A	1	
		B	2	
		C	3	
		D	4	
		E	5	
		F	6	
		G	7	
		H	8	
		ILLEGAL	9	BIT CODE 9 IS ILLEGAL BECAUSE THE GRID DOES NOT USE THE LETTER I.
		J	10	
		K	11	
		L	12	
		M	13	
		N	14	
		ILLEGAL	15	BIT CODE 15 IS ILLEGAL BECAUSE THE GRID DOES NOT USE THE LETTER O.
		P	16	
		Q	17	
		R	18	
		S	19	
		T	20	
		U	21	
		V	22	
		W	23	
		X	24	
		Y	25	

FIELD CODING FOR J3.5C2

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
825	001	UNIVERSAL TRANSVERSE MERCATOR GRID ZONE ROW ----- Z ILLEGAL	(CONTINUED) 26 27 THROUGH 31	
820	001	UNIVERSAL TRANSVERSE MERCATOR 10-METER NORTHING ----- 0 THROUGH 99,990 METERS ILLEGAL	0 THROUGH 9999 10000 THROUGH 16383	THE NUMERICAL PART OF THE UNIVERSAL TRANSVERSE MERCATOR (UTM) GRID REFERENCE WHICH INDICATES THE NORTHING COORDINATE TO THE CLOSEST 10 METERS. IN 10 METER INCREMENTS.
819	001	UNIVERSAL TRANSVERSE MERCATOR 10-METER EASTING ----- 0 THROUGH 99,990 METERS ILLEGAL	0 THROUGH 9999 10000 THROUGH 16383	THE NUMERICAL PART OF THE UNIVERSAL TRANSVERSE MERCATOR (UTM) GRID REFERENCE WHICH INDICATES THE EASTING COORDINATE TO THE CLOSEST 10 METERS. IN 10 METER INCREMENTS.
818	001	UNIVERSAL TRANSVERSE MERCATOR GRID ZONE COLUMN ----- NO STATEMENT UTM GRID ZONE COLUMN UNDEFINED	0 1 THROUGH 60 61 THROUGH 63	IN THE UNIVERSAL TRANSVERSE MERCATOR (UTM) SYSTEM, AN AREA ON THE EARTH'S SURFACE BETWEEN NORTH- SOUTH COLUMNS MEASURING DEGREES EAST-WEST FROM 80 DEGREES SOUTH LATITUDE TO 84 DEGREES NORTH LATITUDE ORIGINATING AT THE 180- DEGREE MERIDIAN.

WORD MAP

WORD NUMBER: J3.5C3

WORD TITLE: LAND (GROUND) POINT/TRACK CONTINUATION WORD 3

24	23:	22	21	20	19	18	17	16	15:	14	13	12	11:	10	09	08	07:	06	05	04	03	02:	01	00:									
<---	:	AREA MINOR AXIS, 3								:	STR, % TRKD VEH:				:STRENGTH, TOTAL:				CONTINUATION WORD :				WORD :										
	:									:	NUMBER OF				:	LABEL				:	FORMAT :												
	:									:	VEHICLES				:					:													
	:	8								:	4				:	4				:	5				:	2							
49:	48	47	46	45	44	43	42	41	40	39:	38	37	36	35	34	33	32	31:	30	29	28	27	26	25									
<---	:	ROUTE NUMBER, 1										:	AXIS ORIENTATION										:	AREA MAJOR AXIS, 3									
	:											:											:										
	:											:											:										
	:											:											:										
	:											:											:										
	:	10										:	8										:	8									

WORD DESCRIPTION

WORD NUMBER: J3.5C3

WORD TITLE: LAND (GROUND) POINT/TRACK CONTINUATION WORD 3

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	01
1551	001	CONTINUATION WORD LABEL	2-	6 5	00011
386	001	STRENGTH, TOTAL NUMBER OF VEHICLES	7-	10 4	
386	002	STRENGTH, PERCENT OF TRACKED VEHICLES (STR, % TRKD VEH)	11-	14 4	
419	009	AREA MINOR AXIS, 3	15-	22 8	
419	010	AREA MAJOR AXIS, 3	23-	30 8	
1806	001	AXIS ORIENTATION	31-	38 8	
1916	001	ROUTE NUMBER, 1	39-	48 10	
351	009	SQUARE/CIRCLE SWITCH (S/C SW)	49-	50 2	
281	002	LATITUDE, LSBS	51-	53 3	
282	002	LONGITUDE, LSBS	54-	56 3	
1612	003	ELEVATION, LSBS	57-	59 3	
756	010	SPARE	60-	69 10	

FIELD CODING FOR J3.5C3

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
386	001	STRENGTH, TOTAL NUMBER OF VEHICLES ----- NO STATEMENT 1 VEHICLE 2 VEHICLES 3 VEHICLES 4 THROUGH 5 VEHICLES 6 THROUGH 7 VEHICLES 8 THROUGH 10 VEHICLES 11 THROUGH 15 VEHICLES 16 THROUGH 20 VEHICLES 21 THROUGH 30 VEHICLES 31 THROUGH 40 VEHICLES 41 THROUGH 50 VEHICLES 51 THROUGH 70 VEHICLES 71 THROUGH 100 VEHICLES 101 THROUGH 200 VEHICLES GREATER THAN 200 VEHICLES	0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15	SPECIFIES THE TOTAL NUMBER OF VEHICLES ASSOCIATED WITH THE TN, REFERENCE.
386	002	STRENGTH, PERCENT OF TRACKED VEHICLES ----- NO STATEMENT <OR= 2% TRACKED VEHICLES >2%<OR= 4% TRACKED VEHICLES >4%<OR= 6% TRACKED VEHICLES >6%<OR= 8% TRACKED VEHICLES >8%<OR= 10% TRACKED VEHICLES >10%<OR= 15% TRACKED VEHICLES >15%<OR= 20% TRACKED VEHICLES >20%<OR= 25% TRACKED VEHICLES >25%<OR= 30% TRACKED VEHICLES >30%<OR= 40% TRACKED VEHICLES	0 1 2 3 4 5 6 7 8 9 10	SPECIFIES THE PERCENTAGE OF THE TOTAL NUMBER OF VEHICLES ASSOCIATED WITH THE TN, REFERENCE THAT ARE TRACKED TYPE VEHICLES.

FIELD CODING FOR J3.5C3

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
386	002	STRENGTH, PERCENT OF TRACKED VEHICLES ----- >40%<OR= 50% TRACKED VEHICLES >50%<OR= 60% TRACKED VEHICLES >60%<OR= 70% TRACKED VEHICLES >70%<OR= 80% TRACKED VEHICLES >80% TRACKED VEHICLES	(CONTINUED) 11 12 13 14 15	
419	009	AREA MINOR AXIS, 3 ----- NO STATEMENT <0.010936133 DATA MILES 0.021872266 THROUGH 0.054680665 DATA MILES 0.082020997 THROUGH 0.273403325 DATA MILES 0.32808339 THROUGH 4.6478565518 DATA MILES 4.9212559843 THROUGH 15.31058618 DATA MILES 15.85739283 THROUGH 82.56780402 DATA MILES	 0 1 2 THROUGH 5 6 THROUGH 13 14 THROUGH 92 93 THROUGH 132 133 THROUGH 255	THIS FIELD IS USED IN CONJUNCTION WITH THE AREA MAJOR AXIS, 3, AXIS ORIENTATION, LATITUDE, AND LONGITUDE TO DESCRIBE THE AREA OF A SQUARE OR RECTANGLE. THE AREA MINOR AXIS, 3 IS ALWAYS ORIENTED AT 90 DEGREES TO THE AREA MAJOR AXIS, 3. THE LENGTH EXPRESSED IN THIS FIELD IS DOUBLED AND CENTERED ON THE POSITION DESCRIBED BY THE LATITUDE AND LONGITUDE. IN 0.010936133 DATA MILE INCREMENTS. IN 0.027340332 DATA MILE INCREMENTS. IN 0.054680665 DATA MILE INCREMENTS. IN 0.273403325 DATA MILE INCREMENTS. IN 0.5468806649 DATA MILE INCREMENTS.
419	010	AREA MAJOR AXIS, 3 -----		THIS FIELD IS USED IN CONJUNCTION WITH THE AREA MINOR AXIS, 3, AXIS ORIENTATION, LATITUDE AND LONGITUDE TO DESCRIBE THE AREA OF A SQUARE OR RECTANGLE. THE LENGTH EXPRESSED IN THIS FIELD IS

FIELD CODING FOR J3.5C3

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
419	010	AREA MAJOR AXIS, 3 -----	(CONTINUED)	
		NO STATEMENT	0	DOUBLED AND CENTERED ON THE POSITION DESCRIBED BY THE LATITUDE AND LONGITUDE.
		<0.010936133 DATA MILES	1	
		0.021872266 THROUGH	2 THROUGH 5	IN 0.010936133 DATA MILE INCREMENTS.
		0.054680665 DATA MILES		
		0.082020997 THROUGH	6 THROUGH 13	IN 0.027340332 DATA MILE INCREMENTS.
		0.273403325 DATA MILES		
		0.32808339 THROUGH	14 THROUGH 92	IN 0.054680665 DATA MILE INCREMENTS.
		4.6478565518 DATA MILES		
		4.9212559843 THROUGH	93 THROUGH 132	IN 0.273403325 DATA MILE INCREMENTS.
		15.31058618 DATA MILES		
		15.85739283 THROUGH	133 THROUGH 255	IN 0.5468806649 DATA MILE INCREMENTS.
		82.56780402 DATA MILES		
1806	001	AXIS ORIENTATION -----		THE AXIS ORIENTATION IS THE OFFSET FROM TRUE NORTH EXPRESSED IN ONE DEGREE INCREMENTS FROM ZERO TO 179 AND IS USED TO ORIENT THE AREA MA- JOR AXIS OF A CIRCLE, ELLIPSE, SQUARE, OR RECTANGLE.
		0 THROUGH 179 DEGREES	0 THROUGH 179	IN ONE DEGREE INCREMENTS.
		ILLEGAL	180 THROUGH 254	
		NO STATEMENT	255	
1916	001	ROUTE NUMBER, 1 -----		SPECIFIES THE IDENTIFYING NUMBER ASSIGNED TO ROADS, HIGHWAYS AND BYWAYS.
		NO STATEMENT	0	
		NUMERIC	1 THROUGH 1023	
351	009	SQUARE/CIRCLE SWITCH -----		USED IN CONJUNCTION WITH THE LATITUDE, LONGITUDE, AREA MAJOR AXIS, AREA MINOR AXIS, AND AXIS ORIENTATION FIELDS TO DESCRIBE AN AREA.
		NO STATEMENT	0	
		SQUARE/RECTANGULAR	1	IF AREA MAJOR AND AREA MINOR AXES ARE EQUAL THE AREA DESCRIBED IS A SQUARE. IF THE AXES ARE NOT EQUAL THE AREA DESCRIBED IS A RECTANGLE.

5.1-766

MIL-STD-6016B

FIELD CODING FOR J3.5C3

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
351	009	SQUARE/CIRCLE SWITCH ----- CIRCULAR/ELLIPTICAL	(CONTINUED) 2	IF AREA MAJOR AND AREA MINOR AXES ARE EQUAL THE AREA DESCRIBED IS A CIRCLE. IF THE AXES ARE NOT EQUAL THE AREA IS AN ELLIPSE.
		UNDEFINED	3	
281	002	LATITUDE, LSBS ----- 0 DEGREES +90/8,388,607 THROUGH +90 DEGREES NORTH NO STATEMENT -90 THROUGH -90/8,388,607 DEGREES SOUTH	0 1 THROUGH 8388607 8388608 8388609 THROUGH 1677215	USED IN CONJUNCTION WITH LATITUDE, 0.0051 MINUTE TO ACHIEVE A PRECISION OF APPROXIMATELY 4 FEET. IN 90/8,388,607 DEGREE INCREMENTS.
282	002	LONGITUDE, LSBS ----- 0 DEGREES +180/16,777,215 THROUGH +180 DEGREES EAST NO STATEMENT -180 THROUGH -180/16,777,215 DEGREES WEST	0 1 THROUGH 1677215 1677216 1677217 THROUGH 33554431	USED IN CONJUNCTION WITH LONGITUDE, 0.0051 MINUTE TO ACHIEVE A PRECISION OF APPROXIMATELY 4 FEET. IN 180/16,777,215 DEGREE INCREMENTS.
1612	003	ELEVATION, LSBS ----- 0 THROUGH 51,193.750 FEET ELEVATION UNKNOWN 0 THROUGH 25,593.75 FEET NO STATEMENT	0 THROUGH 16383 16384 0 THROUGH 8190 8191	USED IN CONJUNCTION WITH ANOTHER ELEVATION FIELD TO INCREASE THE PRECISION OF THE FIELD. IN 25/8 FOOT INCREMENTS. IN 25/8 FOOT INCREMENTS.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

J3.6 MESSAGE SUMMARY

PURPOSE

The J3.6 Space Track message is used to exchange information on Space and Ballistic Missile tracks.

DATA ELEMENT SUMMARY

<u>J3.6I</u>		<u>J3.6C1</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	WORD FORMAT	2
LABEL, J-SERIES	5	CONTINUATION WORD LABEL	5
SUBLABEL, J-SERIES	3	SIGMA X POSITION	10
MESSAGE LENGTH INDICATOR	3	SIGMA Y POSITION	10
EXERCISE INDICATOR	1	SIGMA Z POSITION	10
FORCE TELL INDICATOR	1	COVARIANCE DATA ELEMENT 22	10
SPECIAL PROCESSING INDICATOR	1	COVARIANCE DATA ELEMENT 33	10
SIMULATION INDICATOR	1	SIGN OF COVARIANCE DATA	1
SPACE SPECIFIC TYPE INDICATOR	1	ELEMENT 23	
TRACK NUMBER, REFERENCE	19	ABSOLUTE VALUE OF COVARIANCE	10
MINUTE	6	DATA ELEMENT 23	
SECOND	6	SIGN OF COVARIANCE DATA	1
TRACK QUALITY, 1	4	ELEMENT 12	
IDENTITY(3)*****		SIGN OF COVARIANCE DATA	1
IDENTITY AMPLIFYING	3	ELEMENT 13	
DESCRIPTOR(3)*****			
IDENTITY DIFFERENCE INDICATOR	1		
SPACE SPECIFIC TYPE(12)*****			
SPARE(1)	*		
SPACE PLATFORM(6)	*		
SPACE PLATFORM ACTIVITY(7)*****	13		
<u>J3.6E0</u>		<u>J3.6C2</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	WORD FORMAT	2
X POSITION IN WGS-84	23	CONTINUATION WORD LABEL	5
X VELOCITY IN WGS-84	14	SIGMA X VELOCITY	10
Y POSITION IN WGS-84	23	SIGMA Y VELOCITY	10
SPACE AMPLIFICATION	5	SIGMA Z VELOCITY	10
AMPLIFICATION CONFIDENCE	3	SIGN OF COVARIANCE DATA	1
		ELEMENT 24	
		ABSOLUTE VALUE OF COVARIANCE	10
		DATA ELEMENT 24	
		SIGN OF COVARIANCE DATA	1
		ELEMENT 34	
		ABSOLUTE VALUE OF COVARIANCE	10
		DATA ELEMENT 34	
		COVARIANCE DATA ELEMENT 44	10
		SIGN OF COVARIANCE DATA	1
		ELEMENT 14	
<u>J3.6E1</u>		<u>J3.6C3</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	WORD FORMAT	2
Y VELOCITY IN WGS-84	14	CONTINUATION WORD LABEL	5
Z POSITION IN WGS-84	23	SIGN OF COVARIANCE DATA	1
Z VELOCITY IN WGS-84	14	ELEMENT 25	
LOST TRACK INDICATOR	1	ABSOLUTE VALUE OF COVARIANCE	10
BOOST INDICATOR	1	DATA ELEMENT 25	
DATA INDICATOR	3		
SPARE	12		

MIL-STD-6016B

J3.6 MESSAGE SUMMARY (Continued)

DATA ELEMENT SUMMARY (Continued)

<u>J3.6C3 (Continued)</u>	
<u>DATA ELEMENT</u>	<u># BITS</u>
SIGN OF COVARIANCE DATA ELEMENT 35	1
ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 35	10
SIGN OF COVARIANCE DATA ELEMENT 45	1
ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 45	10
COVARIANCE DATA ELEMENT 55	10
SIGN OF COVARIANCE DATA ELEMENT 15	1
BALLISTIC MISSILE BETA(18)*****	
BALLISTIC MISSILE	*
ACCELERATION(18)*****	18
SPARE	1

<u>J3.6C4</u>	
<u>DATA ELEMENT</u>	<u># BITS</u>
WORD FORMAT	2
CONTINUATION WORD LABEL	5
SIGN OF COVARIANCE DATA ELEMENT 26	1
ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 26	10
SIGN OF COVARIANCE DATA ELEMENT 36	1
ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 36	10
SIGN OF COVARIANCE DATA ELEMENT 46	1
ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 46	10
SIGN OF COVARIANCE DATA ELEMENT 56	1
ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 56	10
COVARIANCE DATA ELEMENT 66	10
SIGN OF COVARIANCE DATA ELEMENT 16	1
SPARE	8

<u>J3.6C5</u>	
<u>DATA ELEMENT</u>	<u># BITS</u>
WORD FORMAT	2
CONTINUATION WORD LABEL	5
SIGMA X VELOCITY	10
SIGMA Y VELOCITY	10
SIGMA Z VELOCITY	10

<u>J3.6C5 (Continued)</u>	
<u>DATA ELEMENT</u>	<u># BITS</u>
VELOCITY COVARIANCE DATA ELEMENT 22	10
VELOCITY COVARIANCE DATA ELEMENT 33	10
SIGN OF VELOCITY COVARIANCE DATA ELEMENT 23	1
ABSOLUTE VALUE OF VELOCITY COVARIANCE DATA ELEMENT 23	10
SIGN OF VELOCITY COVARIANCE DATA ELEMENT 12	1
SIGN OF VELOCITY COVARIANCE DATA ELEMENT 13	1

MIL-STD-6016B

J3.6 TRANSMIT/RECEIVE RULES

TITLE: Space Track Message

TRANSMIT RULES

1. The J3.6 Space Track message shall be transmitted in one of the following sequences when reporting a ballistic missile track.

a. When reporting a ballistic missile track, a J3.6I/J3.6E0/J3.6E1 word sequence (with the Data Indicator set to value 1, State Vector Only) shall be transmitted once by the JU with R^2 as follows:

(1) When reporting a new ballistic missile track on the interface.

(2) When assuming R^2 of a ballistic missile track.

(3) When a Force Tell Alert is initiated on a ballistic missile track.

(4) Periodically at a RRN of 6 (12 seconds, 8-20 second interval) for real-time ballistic missile tracks.

(5) Periodically at a RRN of 4 (48 seconds, 36-60 second interval) for nonreal-time ballistic missile tracks.

(6) When any data element (other than position, velocity, time, and track quality data) changes for real-time ballistic missile tracks.

(7) When any data element changes for nonreal-time ballistic missile tracks.

b. When the JU with R^2 determines that a ballistic missile track is lost, a J3.6I/J3.6E0/J3.6E1/J3.6C1/J3.6C5 word sequence (with the Lost Track Indicator set to value 1, Lost Track, and the Data Indicator set to value 2, Partial covariance) shall be transmitted with the data from the last sensor contact. If restricted to 3 words per time slot a J3.6I/J3.6E0/J3.6E1 word

J3.6 TRANSMIT/RECEIVE RULES (Continued)

TRANSMIT RULES (Continued)

sequence (with the Lost Track Indicator set to value 1, Lost Track, and the Data Indicator set to value 2, Partial Covariance), followed by a J3.6I/J3.6C1/J3.6C5 word sequence, shall be transmitted. Subsequently, a J3.6I/J3.6E0/J3.6E1 word sequence (with the Lost Track Indicator set to value 1, Lost Track, and the Data Indicator set to value 1, State Vector Only) will be transmitted periodically at an RRN of 4 (48 seconds, 36-60 second interval) unless a drop track has been initiated, another JU assumes R^2 , or the estimated time of impact has passed.

c. When a J7.1 message with the Data Update Request Action field set to value 1, Data Update Request by Track Number, is received on a ballistic missile track, the JU with R^2 shall respond with a J3.6I/J3.6E0/J3.6E1 word sequence (with the Data Indicator set to value 1, State Vector Only).

d. When a J7.1 message with the Data Update Request Action field set to value 2, Ballistic Missile Update Request, and the Covariance Indicator field set to value 1, Covariance Request, is received on a ballistic missile track, the C^2 JU with R^2 for the Reference TN shall respond with a J3.6I/J3.6E0/J3.6E1 word sequence (with the Data Indicator set to value 3, Full Covariance) followed by a J3.6I/J3.6C1/J3.6C2/J3.6C3/J3.6C4 word sequence. If restricted to three words per time slot, the C^2 JU shall respond with a J3.6I/J3.6E0/J3.6E1 word sequence (with the Data Indicator set to value 3, Full Covariance) followed by a J3.6I/J3.6C1/J3.6C2 word sequence followed by a J3.6I/J3.6C3/J3.6C4 word sequence. If the J3.6C2/J3.6C3/J3.6C4 words have not been implemented, then a J3.6I/J3.6E0/J3.6E1/J3.6C1/J3.6C5 word sequence (with the Data Indicator set to value 2, Partial Covariance) shall be transmitted. If restricted to three words per time slot, a J3.6I/J3.6E0/J3.6E1 word sequence (with the Data Indicator set to value 2, Partial Covariance) followed by a J3.6I/J3.6C1/J3.6C5 word sequence shall be transmitted. Periodicity of responses shall be in accordance with the Number/Frequency of Updates field.

e. When a J7.1 message with the Data Update Request Action field set to value 2, Ballistic Missile Update Request, and the Covariance Indicator

J3.6 TRANSMIT/RECEIVE RULES (Continued)

TRANSMIT RULES (Continued)

set to value 0, No Covariance, is received, the C² JU with R² for the Reference TN shall respond with a J3.6I/J3.6E0/J3.6E1 word sequence (with the Data Indicator set to value 1, State Vector Only). Periodicity of responses shall be in accordance with the Number/Frequency of Updates field.

f. The periodic timer shall be restarted when a J3.6 transmission is made.

g. When Space Platform and/or Space Platform Activity, as well as Space Specific Type data are available, and State Vector Only data are being reported (Data Indicator set to value 1, State Vector Only), the J3.6I/J3.6E0/J3.6E1 word sequence may be sent in alternate transmissions with Space Specific Type Indicator set to value 0, and then with the Space Specific Type Indicator set to value 1. When covariance data is being reported (Data Indicator set to value 2, Partial Covariance, or value 3, Full Covariance), either Space Platform and/or Space Platform Activity, or Space Specific Type (with the appropriate Data Indicator value set) shall be sent in the J3.6I word.

2. When reporting a space track, word sequence and protocols are TBD.

RECEIVE RULES

1. Purging of received data is a system option.

2. Any valid word sequence shall be accepted.

.....

WORD TITLE: SPACE TRACK INITIAL WORD

24	23	22	21	20	19	18:	17:	16:	15:	14:	13:	12	11	10:	09	08	07:	06	05	04	03	02:	01	00:
						:SST:	SIM:	:FT:EX:			MESSAGE			:SUBLABEL,									:WORD:	
<---						:IND:	IND:	SPI:	IND:	IND:	LENGTH			:J-SERIES			LABEL, J-SERIES						:FORMAT:	
						:	:	:	:	:	INDICATOR												:	:
						:	1	:	1	:	1	:	1	:	1	:	3	:	3	:	5	:	2	:

49:	48	47	46	45	44	43:	42	41	40	39	38	37:	36	35	34	33	32	31	30	29	28	27	26	25
<---	:	SECOND					:	MINUTE					:	TRACK NUMBER, REFERENCE										
:	6					:	6					:	19											

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50				
:	SP	:	SPACE SPECIFIC TYPE											:	:	IDENTITY		:						
:	SPACE PLATFORM ACTIVITY											:	SPACE PLATFORM				:	ID	:	TRACK				
:	SPACE PLATFORM ACTIVITY											:	SPACE PLATFORM				:	DIF	:	ID AMP	:	QUALITY, 1		
:												:					:	:	DESCR		:			
:	13											:	1				:	3		:	4			

WORD DESCRIPTION

WORD NUMBER: J3.6I

WORD TITLE: SPACE TRACK INITIAL WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	00
270	004	LABEL, J-SERIES	2-	6 5	00011
271	005	SUBLABEL, J-SERIES	7-	9 3	110
800	001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
385	003	EXERCISE INDICATOR (EX IND)	13	1	
354	002	FORCE TELL INDICATOR (FT IND)	14	1	
292	002	SPECIAL PROCESSING INDICATOR (SPI)	15	1	
1604	001	SIMULATION INDICATOR (SIM IND)	16	1	
267	003	SPACE SPECIFIC TYPE INDICATOR (SST IND)	17	1	
769	002	TRACK NUMBER, REFERENCE	18-	36 19	
797	004	MINUTE	37-	42 6	
380	001	SECOND	43-	48 6	
280	003	TRACK QUALITY, 1	49-	52 4	
376	007	IDENTITY	53-	55 3	
376	001	IDENTITY AMPLIFYING DESCRIPTOR (ID AMP DESCR)	53-	55 3	
1860	001	IDENTITY DIFFERENCE INDICATOR (ID DIF)	56	1	
749	002	SPACE SPECIFIC TYPE	57-	68 12	
756	001	SPARE (SP)	69	1	
1797	005	SPACE PLATFORM	57-	62 6	
1798	005	SPACE PLATFORM ACTIVITY	63-	69 7	

FIELD CODING FOR J3.6I				(SHEET 1)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
385	003	EXERCISE INDICATOR -----		INDICATES WHETHER OR NOT THE MESSAGE IDENTIFIES AN EXERCISE TRACK.
		NON-EXERCISE TRACK	0	
		EXERCISE TRACK OR UNIT	1	
354	002	FORCE TELL INDICATOR -----		THIS INDICATOR CAUSES TRACK/POINT DATA TO BE FORCED THROUGH CONTROLLABLE RECEIVE FILTERS.
		NO STATEMENT	0	
		FORCE TELL STATUS	1	
292	002	SPECIAL PROCESSING INDICATOR -----		INDICATES THAT A MESSAGE REQUIRES SPECIAL PROCESSING.
		SPECIAL PROCESSING NOT REQUIRED	0	
		SPECIAL PROCESSING REQUIRED	1	
1604	001	SIMULATION INDICATOR -----		INDICATES WHETHER THE TRACK REFERENCED IN THE MESSAGE IS A REAL OR A SIMULATED TRACK.
		REAL TRACK OR UNIT	0	
		SIMULATED TRACK OR UNIT	1	
267	003	SPACE SPECIFIC TYPE INDICATOR -----		INDICATES WHETHER SPACE PLATFORM/SPACE PLATFORM ACTIVITY OR SPACE SPECIFIC TYPE IS BEING REPORTED.
		SPACE PLATFORM/SPACE PLATFORM ACTIVITY BEING REPORTED.	0	
		SPACE SPECIFIC TYPE BEING REPORTED	1	
769	002	TRACK NUMBER, REFERENCE -----		A REFERENCE NUMBER USED TO ASSOCIATE INFORMATION AND DIRECTIVES WITH THE TRACK. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF

FIELD CODING FOR J3.6I			(SHEET 2)
DFI	DUI	DUI/DI NAME	DI BIT CODE
769	002	TRACK NUMBER, REFERENCE	(CONTINUED)

ZERO THROUGH SEVEN. EACH THREE-BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6
00111	7
01000	A
01001	B
01010	C
01011	D
01100	E
01101	F
01110	G
01111	H
10000	J
10001	K
10010	L
10011	M
10100	N
10101	P
10110	Q
10111	R
11000	S
11001	T

FIELD CODING FOR J3.6I			(SHEET 3)
DFI	DUI	DUI/DI NAME	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)
			11010 U
			11011 V
			11100 W
			11101 X
			11110 Y
			11111 Z
		00000	0
		00001-00076	1 THROUGH 62
		00077	63
		00100-00175	64 THROUGH 125
		00176	126
		00177	127
		00200-07776	128 THROUGH 4094
		07777	4095
		0A000-0Z777	4096 THROUGH 16383
		10000-17777	16384 THROUGH 20479
		1A000-1Z777	20480 THROUGH 32767
		20000-27777	32768 THROUGH 36863
		2A000-2Z777	36864 THROUGH 49151
			NO STATEMENT.
			ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
			ILLEGAL.
			ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
			RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
			COLLECTIVE ADDRESS.
			ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
			ILLEGAL.
			ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
			ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
			ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
			ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
			ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.

			FIELD CODING FOR J3.6I	(SHEET 4)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		70000-77776	114688 THROUGH 118782	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.

			FIELD CODING FOR J3.6I	(SHEET 5)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE ----- 7A000-ZZ777	(CONTINUED) 118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
797	004	MINUTE ----- 0 THROUGH 59 ILLEGAL NO STATEMENT	0 THROUGH 59 60 THROUGH 62 63	THE MINUTE OF THE HOUR. IN ONE MINUTE INCREMENTS.
380	001	SECOND ----- 0 THROUGH 59 ILLEGAL NO STATEMENT	0 THROUGH 59 60 THROUGH 62 63	THE SECOND OF THE MINUTE. IN ONE SECOND INCREMENTS.
280	003	TRACK QUALITY, 1 -----		SPECIFIES THE RELIABILITY OF THE KINEMATIC DATA WITH HIGHER VALUES INDICATING HIGHER TRACK QUALITY. THE ALGORITHM USED TO DERIVE BALLISTIC MISSILE TRACK QUALITY IS: B EQUALS THE SUMMATION (FROM 1 TO 3) OF THE POSITIONAL VARIANCES CONTAINED IN THE COVARIANCE MATRIX PLUS THE PRODUCT OF THE VELOCITY VARIANCES IN THE COVARIANCE MATRIX TIMES A SQUARED FACTOR WHICH VARIES THE DEPENDENCE OF THE COMPUTED BALLISTIC MISSILE TRACK QUALITY ON THE VELOCITY ERRORS OF THE REPORTED TRACK. THE DEFAULT FACTOR IS EQUAL TO 6 SECONDS (0-24, 1). B IS A LOOK- UP TABLE.
		NONREAL-TIME TRACK	0	
		>2.166332 TIMES 10 TO THE 10TH POWER SQUARE FEET	1	
		EQUAL TO OR < 2.166332 TIMES 10 TO THE 10TH POWER SQUARE FEET	2	

			FIELD CODING FOR J3.6I		(SHEET 6)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION	
280	003	TRACK QUALITY, 1 -----	(CONTINUED)		
		EQUAL TO OR < 6.665636	3		
		TIMES 10 TO THE 9TH			
		POWER SQUARE FEET			
		EQUAL TO OR <2.050965	4		
		TIMES 10 TO THE 9TH			
		POWER SQUARE FEET			
		EQUAL TO OR <	5		
		631,066,095 SQUARE FEET			
		EQUAL TO OR <	6		
		194,174,183 SQUARE FEET			
		EQUAL TO OR < 59,745,902	7		
		SQUARE FEET			
		EQUAL TO OR < 18,383,355	8		
		SQUARE FEET			
		EQUAL TO OR < 5,656,417	9		
		SQUARE FEET			
		EQUAL TO OR < 1,740,436	10		
		SQUARE FEET			
		EQUAL TO OR < 535,519	11		
		SQUARE FEET			
		EQUAL TO OR < 164,775	12		
		SQUARE FEET			
		EQUAL TO OR < 50,700	13		
		SQUARE FEET			
		EQUAL TO OR < 15,600	14		
		SQUARE FEET			
		EQUAL TO OR < 4,800	15		
		SQUARE FEET			
376	007	IDENTITY -----		EXPRESSES THE STANDARD IDENTITY OF	
		PENDING	0	A TRACK.	
		UNKNOWN	1	A TRACK WHICH HAS NOT BEEN SUBJECTED	
		ASSUMED FRIEND	2	TO THE IDENTIFICATION PROCESS.	
		FRIEND	3	AN EVALUATED TRACK WHICH HAS NOT	
		NEUTRAL	4	BEEN IDENTIFIED.	
				A TRACK WHICH IS ASSUMED TO BE A	
				FRIEND BECAUSE OF ITS	
				CHARACTERISTICS, BEHAVIOR, OR	
				ORIGIN.	
				A TRACK BELONGING TO A DECLARED	
				FRIENDLY NATION.	
				A TRACK WHOSE CHARACTERISTICS,	
				BEHAVIOR, ORIGIN, OR NATIONALITY	

			FIELD CODING FOR J3.6I	(SHEET 7)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
376	007	IDENTITY -----	(CONTINUED)	
		SUSPECT	5	INDICATE THAT IT IS NEITHER SUPPORTING NOR OPPOSING FRIENDLY FORCES.
		HOSTILE	6	A TRACK WHICH IS POTENTIALLY HOSTILE BECAUSE OF ITS CHARACTERISTICS, BEHAVIOR, ORIGIN, OR NATIONALITY.
		UNDEFINED	7	A TRACK DECLARED TO BELONG TO ANY OPPOSING NATION, PARTY, GROUP, OR ENTITY, WHICH BY VIRTUE OF ITS BEHAVIOR OR INFORMATION COLLECTED ON IT SUCH AS CHARACTERISTICS, ORIGIN OR NATIONALITY CONTRIBUTES TO THE THREAT TO FRIENDLY FORCES.
376	001	IDENTITY AMPLIFYING DESCRIPTOR -----		A DESCRIPTOR ADDING TO THE STANDARD IDENTITY OF A TRACK INVOLVED IN AN EXERCISE. THE STANDARD IDENTITY IS FRIEND.
		EXERCISE PENDING	0	
		EXERCISE UNKNOWN	1	
		EXERCISE ASSUMED FRIEND	2	
		EXERCISE FRIEND	3	
		EXERCISE NEUTRAL	4	
		JOKER	5	
		FAKER	6	
		UNDEFINED	7	
1860	001	IDENTITY DIFFERENCE INDICATOR -----		THE IDENTITY DIFFERENCE INDICATOR IS USED TO INDICATE THAT A CONFLICT IN THE IDENTITY OF THE TRACK/ REFERENCE TN IS CURRENTLY BEING EVALUATED BY THE UNIT WITH REPORTING RESPONSIBILITY.
		NO STATEMENT	0	NO IDENTITY DIFFERENCE EXISTS ON REFERENCE TN AT THIS TIME, OR PREVIOUS CONFLICT HAS BEEN RESOLVED.
		IDENTITY DIFFERENCE	1	AN IDENTITY DIFFERENCE EXISTS ON REFERENCE TN. THE IDENTITY BEING REPORTED IS THE LATEST IDENTITY LOCALLY HELD BY THE UNIT

FIELD CODING FOR J3.6I

(SHEET 8)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1860	001	IDENTITY DIFFERENCE INDICATOR -----	(CONTINUED)	WITH REPORTING RESPONSIBILITY PRIOR TO THE CONFLICT, NOT THE CONFLICTING IDENTITY CURRENTLY UNDER OPERATOR EVALUATION.
749	002	SPACE SPECIFIC TYPE -----		THE SPECIFIC TYPE OF A POINT OR TRACK WITH AN ENVIRONMENT/CATEGORY OF SPACE.
		NO STATEMENT	0	
		FROG-7	1	
		HONEST JOHN	2	
		SAKR 80	3	
		SS-21 MOD 2	4	
		SS-21 MOD 3	5	
		HAFT-I	6	
		UNDEFINED	7 THROUGH 78	
		SHORT RANGE (0-65 DM)	79	
		ALACRAN	80	
		CHENG FENG	81	
		CONDOR	82	
		HAFT II	83	
		IRAN-130	84	
		LANCE	85	
		MB/EE-150	86	
		MB/EE-300	87	
		UNDEFINED	88	
		PRITHVI	89	
		SS-1B (SCUD-A)	90	
		SS-1C (SCUD-B)	91	
		SS-21 (SCARAB)	92	
		SS-300	93	
		B-610/CJS-98 (BG510)	94	
		NHK-I	95	
		NHK-II (HYON MU)	96	
		UNDEFINED	97 THROUGH 168	
		SHORT-MEDIUM RANGE (66-200 DM)	169	
		AL-HUSAYN	170	
		UNDEFINED	171	
		HAFT III	172	
		M-9	173	
		M-11	174	
		MB/EE-600	175	

FIELD CODING FOR J3.6I

(SHEET 9)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
749	002	SPACE SPECIFIC TYPE -----	(CONTINUED)	
		SCUD-C	176	
		SS-23 (SPIDER)	177	
		AL HUSSEIN	178	
		UNDEFINED	179 THROUGH 242	
		MEDIUM RANGE (201-400 DM)	243	
		AL-ABBAS	244	
		JERICH0-I	245	
		AL HIJARAN	246	
		SONDA IV	247	
		UNDEFINED	248 THROUGH 330	
		MEDIUM-EXTENDED RANGE (401-600 DM)	331	
		AL-FATAH	332	
		BADR-2000	333	
		CONDOR II	334	
		CSS-1	335	
		MB/EE-1000	336	
		SKY HORSE	337	
		SS-12A (SCALEBOARD A)	338	
		SS-12B (SCALEBOARD B)	339	
		SS1000	340	
		TIEN MA	341	
		UNDEFINED	342 THROUGH 416	
		EXTENDED RANGE (601-800 DM)	417	
		ARNISTON	418	
		CAPRICORNIO	419	
		JERICH0 II	420	
		NODONG-1	421	
		SS-N-5 (SERB)	422	
		UNDEFINED	423 THROUGH 496	
		EXTENDED-LONG RANGE (801-1000 DM)	497	
		AGNI	498	
		AL/ABED	499	
		CC-4 (SANDAL)	500	
		CSS-5	501	
		UNDEFINED	502 THROUGH 575	
		LONG RANGE (1001-1350 DM)	576	
		CHEVALINE	577	
		CSS-2	578	

FIELD CODING FOR J3.6I

(SHEET 10)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
749	002	SPACE SPECIFIC TYPE -----	(CONTINUED)	
		CSS-3	579	
		CSS-4	580	
		CSS-N-3	581	
		M-4 SLBM	582	
		M-5 SLBM	583	
		M-20 SLBM	584	
		MIDGETMAN	585	
		MINUTEMAN I	586	
		MINUTEMAN II	587	
		PEACEKEEPER	588	
		POLARIS A-3	589	
		POSEIDON C-3	590	
		SS-11 (SEGO)	591	
		SS-13 (SAVAGE)	592	
		SS-17 (SPANKER) MOD 1	593	
		SS-17 (SPANKER) MOD 2	594	
		SS-17 (SPANKER) MOD 3	595	
		SS-18 (SATAN) MOD 1	596	
		SS-18 (SATAN) MOD 2	597	
		SS-18 (SATAN) MOD 3	598	
		SS-20 (SABER)	599	
		SS-24 (SCALPEL)	600	
		SS-25 (SICKLE)	601	
		SS-N-6 (SAWFLY)	602	
		SS-N-8	603	
		SS-N-17 (SNIPE)	604	
		SS-N-18 (STINGRAY)	605	
		SS-N-20 (STURGEON)	606	
		SS-N-23 (SKIFF)	607	
		SSBS S-3	608	
		SSBS S-4	609	
		TRIDENT I (C-4)	610	
		TRIDENT II (D-5)	611	
		MODIFIED CSS-5	612	
		SS-19 MOD 3	613	
		UNDEFINED	614	
		NEW SOLID SLBM	615	
		CSS-NX-3	616	
		M4B	617	
		M45	618	
		UNDEFINED	619 THROUGH 786	
		>1350 DM	787	
		ABM-1B (GALOSH)	788	

FIELD CODING FOR J3.6I

(SHEET 11)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
749	002	SPACE SPECIFIC TYPE -----	(CONTINUED)	
		ARROW	789	
		ASTER	790	
		CORPS SAM	791	
		ERINT	792	
		HAWK	793	
		PATRIOT	794	
		SA-10 (GRUMBLE)	795	
		SA-12A (GLADIATOR)	796	
		SA-12B (GIANT)	797	
		SA-N-6 (GRUMBLE)	798	
		SH-08 (GAZELLE)	799	
		STANDARD MISSILE BLOCK IVA	800	
		THAAD	801	
		SM-2 BLOCK IV	802	
		SM-3 LEAP	803	
		UNDEFINED	804 THROUGH 876	
		INTERCEPTOR	877	
		OPERATIONAL COMMANDER DEFINED 1-64	878 THROUGH 941	
		UNDEFINED	942 THROUGH 1022	
		BALLISTIC MISSILE GENERAL	1023	
		UNDEFINED	1024 THROUGH 2046	
		SPACE GENERAL	2047	
		UNDEFINED	2048 THROUGH 4093	
		RESET TO NO STATEMENT	4094	
		UNDEFINED	4095	
1797	005	SPACE PLATFORM -----		THE SPACE PLATFORM FIELD ALONG WITH THE SPACE PLATFORM ACTIVITY FIELD FURTHER DEFINES THE IDENTITY OF A SPACE TRACK.
		NO STATEMENT	0	
		SATELLITE	1	
		BASE	2	
		WEAPON	3	
		TRANSPORT	4	
		PATROL	5	
		SUPPORT	6	
		DEBRIS	7	
		DECOY	8	
		UNDEFINED	9 THROUGH 30	

FIELD CODING FOR J3.6I

(SHEET 12)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1797	005	SPACE PLATFORM -----	(CONTINUED)	
		SPACE GENERAL	31	
		UNDEFINED	32 THROUGH 61	
		BALLISTIC MISSILE	62	
		GENERAL UNKNOWN		
		RESET TO NO STATEMENT	63	
1798	005	SPACE PLATFORM ACTIVITY -----		THE SPACE PLATFORM ACTIVITY FIELD ALONG WITH THE SPACE PLATFORM FIELD FURTHER DEFINES THE IDENTITY OF A SPACE TRACK.
		NO STATEMENT	0	
		RECONNAISSANCE	1	
		ANTISPACE WARFARE	2	
		TELEVISION	3	
		LOGISTICS	4	
		ANTISURFACE WARFARE	5	
		ELECTRONIC WARFARE (EW)	6	
		SURVEILLANCE	7	
		DATA LINK	8	
		ELECTRONIC WARFARE	9	
		SUPPORT (ES)		
		ELECTRONIC ATTACK (EA)	10	
		COMMUNICATIONS	11	
		RETURN TO BASE (RTB)	12	
		UNDEFINED	13 THROUGH 50	
		SPACE ACTIVITY 1 THROUGH 12	51 THROUGH 62	A SPECIFIC SPACE MISSION DEFINED BY THE JOINT OPERATIONAL COMMANDER.
		UNDEFINED	63 THROUGH 114	
		BALLISTIC MISSILE	115 THROUGH 126	
		ACTIVITY 1 THROUGH 12		
		RESET TO NO STATEMENT	127	

.....

WORD TITLE: SPACE TRACK EXTENSION WORD

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25	
<---											:	X VELOCITY IN WGS-84													:
											:	14													:

:	69	68	67:	66	65	64	63	62:	61	60	59	58	57	56	55	54	53	52	51	50
:	AMP CONF			:	SPACE AMPLIFICATION			:	Y POSITION IN WGS-84											
:	3	:	5			:	23													

WORD DESCRIPTION

WORD NUMBER: J3.6E0

WORD TITLE: SPACE TRACK EXTENSION WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	10
1108 001	X POSITION IN WGS-84	2-	24 23	
1113 001	X VELOCITY IN WGS-84	25-	38 14	
1108 002	Y POSITION IN WGS-84	39-	61 23	
601 005	SPACE AMPLIFICATION	62-	66 5	
358 002	AMPLIFICATION CONFIDENCE	67-	69 3	
	(AMP CONF)			

FIELD CODING FOR J3.6E0

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1108	001	X POSITION IN WGS-84 -----		X POSITION IN EARTH-CENTERED, EARTH-FIXED CARTESIAN COORDINATES AS DEFINED BY WGS-84.
		0 THROUGH 41,943,030 FEET	0 THROUGH 4194303	IN 10 FOOT INCREMENTS.
		NO STATEMENT	4194304	
		-41,943,030 THROUGH -10 FEET	4194305 THROUGH 8388607	IN 10 FOOT INCREMENTS.
1113	001	X VELOCITY IN WGS-84 -----		THE RATE OF CHANGE OF POSITION ALONG THE X AXIS (WGS-84 REFERENCE FRAME). IN 3.33 FEET/SEC INCREMENTS.
		0 THROUGH 27,276.03 FT/ SEC	0 THROUGH 8191	
		NO STATEMENT	8192	
		-27,276.03 THROUGH -3.33 FT/SEC	8193 THROUGH 16383	
1108	002	Y POSITION IN WGS-84 -----		Y POSITION IN EARTH-CENTERED, EARTH-FIXED CARTESIAN COORDINATES AS DEFINED BY WGS-84.
		0 THROUGH 41,943,030 FEET	0 THROUGH 4194303	IN 10 FOOT INCREMENTS.
		NO STATEMENT	4194304	
		-41,943,030 THROUGH -10 FEET	4194305 THROUGH 8388607	IN 10 FOOT INCREMENTS.
601	005	SPACE AMPLIFICATION -----		INDICATES ADDITIONAL INFORMATION ON THE SPACE ENVIRONMENT/CATEGORY BEING REPORTED IN THE MESSAGE.
		NO STATEMENT	0	
		UNITARY HIGH EXPLOSIVE WARHEAD	1	SINGLE CHARGE HIGH EXPLOSIVE WARHEAD.
		NUCLEAR WARHEAD	2	
		BULK CHEMICAL WARHEAD	3	SINGLE WARHEAD (CHEMICAL).
		BULK BIOLOGICAL WARHEAD	4	SINGLE WARHEAD (BIOLOGICAL).
		FUEL-AIR EXPLOSIVE WARHEAD	5	
		DEBRIS	6	
		WARHEAD	7	
		PENETRATION AID	8	DECOY, CHAFF, ETC.
		HIGH EXPLOSIVE	9	MULTIPLE HIGH EXPLOSIVE BOMBLETS DISPERSED IN FLIGHT.
		SUBMUNITION WARHEAD		

FIELD CODING FOR J3.6E0

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
601	005	SPACE AMPLIFICATION -----	(CONTINUED)	
		CHEMICAL SUBMUNITION WARHEAD	10	MULTIPLE CHEMICAL BOMBLETS DISPERSED IN FLIGHT.
		BIOLOGICAL SUBMUNITION WARHEAD	11	MULTIPLE BIOLOGICAL BOMBLETS DISPERSED IN FLIGHT.
		UNDEFINED RESET TO NO STATEMENT	12 THROUGH 30 31	
358	002	AMPLIFICATION CONFIDENCE -----		A MEASURE OF THE CONFIDENCE IN THE VALIDITY OR CERTAINTY OF THE AMPLIFICATION INFORMATION PROVIDED IN THE AMPLIFICATION FIELD OF THE MESSAGE. LARGER VALUES REPRESENT A GREATER CONFIDENCE LEVEL.
		NO STATEMENT	0	
		0-THROUGH 33%	1	
		34- THROUGH 66%	2	
		67- THROUGH 90%	3	
		91- THROUGH 97%	4	
		GREATER THAN OR EQUAL TO 98%	5	
		UNDEFINED	6 THROUGH 7	

.....

WORD TITLE: SPACE TRACK EXTENSION WORD

<---

Z VELOCITY IN WGS-84

Z POSITION IN WGS-84

SPARE

```

: DATA :BST:LT :

```

: INDICATOR :IND:IND:

DATE	DESCRIPTION	DEBIT	CREDIT	BALANCE
1999				
1	Balance			
2				
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				
21				
22				
23				
24				
25				
26				
27				
28				
29				
30				
31				
32				
33				
34				
35				
36				
37				
38				
39				
40				
41				
42				
43				
44				
45				
46				
47				
48				
49				
50				
51				
52				
53				
54				
55				
56				
57				
58				
59				
60				
61				
62				
63				
64				
65				
66				
67				
68				
69				
70				
71				
72				
73				
74				
75				
76				
77				
78				
79				
80				
81				
82				
83				
84				
85				
86				
87				
88				
89				
90				
91				
92				
93				
94				
95				
96				
97				
98				
99				
100				

$$: \quad 3 \quad : \quad 1 : 1 :$$

WORD DESCRIPTION

WORD NUMBER: J3.6E1
WORD TITLE: SPACE TRACK EXTENSION WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	10
1113 002	Y VELOCITY IN WGS-84	2-	15 14	
1108 003	Z POSITION IN WGS-84	16-	38 23	
1113 003	Z VELOCITY IN WGS-84	39-	52 14	
1107 002	LOST TRACK INDICATOR (LT IND)	53	1	
1107 003	BOOST INDICATOR (BST IND)	54	1	
1107 005	DATA INDICATOR	55-	57 3	
756 012	SPARE	58-	69 12	

FIELD CODING FOR J3.6E1

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1113	002	Y VELOCITY IN WGS-84 ----- 0 THROUGH 27,276.03 FT/ SEC NO STATEMENT -27,276.03 THROUGH -3.33 FT/SEC	0 THROUGH 8191 8192 8193 THROUGH 16383	THE RATE OF CHANGE OF POSITION ALONG THE Y AXIS (WGS-84 REFERENCE FRAME). IN 3.33 FEET/SEC INCREMENTS.
1108	003	Z POSITION IN WGS-84 ----- 0 THROUGH 41,943,030 FEET NO STATEMENT -41,943,030 THROUGH -10 FEET	0 THROUGH 4194303 4194304 4194305 THROUGH 8388607	Z POSITION IN EARTH-CENTERED, EARTH- FIXED CARTESIAN COORDINATES AS DEFINED BY WGS-84. IN 10 FOOT INCREMENTS. IN 10 FOOT INCREMENTS.
1113	003	Z VELOCITY IN WGS-84 ----- 0 THROUGH 27,276.03 FT/ SEC NO STATEMENT -27,276.03 THROUGH -3.33 FT/SEC	0 THROUGH 8191 8192 8193 THROUGH 16383	THE RATE OF CHANGE OF POSITION ALONG THE Z AXIS (WGS-84 REFERENCE FRAME). IN 3.33 FEET/SEC INCREMENTS.
1107	002	LOST TRACK INDICATOR ----- TRACKING LOST TRACK	0 1	INDICATES WHETHER THE TRACK IS LOST OR CURRENTLY BEING TRACKED. INDICATES THE TRACK HAS BEEN LOST AND MESSAGE CONTAINS THE LAST MEASURED DATA.
1107	003	BOOST INDICATOR ----- NOT IN BOOST BOOST	0 1	SPECIFIES WHETHER A BALLISTIC MISSILE IS IN THE BOOST STAGE.
1107	005	DATA INDICATOR ----- NO STATEMENT STATE VECTOR ONLY PARTIAL COVARIANCE FULL COVARIANCE	0 1 2 3	SPECIFIES THE DESCRIPTIVE DATA TO FOLLOW, IF ANY. ONLY STATE VECTOR TRANSMITTED. NOT DESCRIPTIVE DATA. PARTIAL COVARIANCE DATA FOLLOWS. FULL COVARIANCE DATA FOLLOWS.

FIELD CODING FOR J3.6E1 (SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1107	005	DATA INDICATOR	(CONTINUED)	

		UNDEFINED	4 THROUGH 7	

.....

WORD TITLE: SPACE TRACK CONTINUATION WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00		
SIGMA Y POSITION								:	SIGMA X POSITION								:	CONTINUATION WORD LABEL					:	WORD FORMAT		:
10								:	10								:	5					:	2		:

49	48	47:	46	45	44	43	42	41	40	39	38	37:	36	35	34	33	32	31	30	29	28	27:	26	25			
			:	COVARIANCE DATA ELEMENT 22										:	SIGMA Z POSITION										:		
<---			:											:											:	--->	
			:	10										:	10										:		

: 69:	68:	67	66	65	64	63	62	61	60	59	58:	57:	56	55	54	53	52	51	50		
:SGN:	SGN:	ABSOLUTE VALUE OF COVARIANCE DATA										:SGN:									
:COV:	COV:	ELEMENT 23										:COV:	COVARIANCE DATA ELEMENT 33								
:13	:12											:23									
: 1	: 1	10										: 1	10								

WORD DESCRIPTION

WORD NUMBER: J3.6C1

WORD TITLE: SPACE TRACK CONTINUATION WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	00001
1109 001	SIGMA X POSITION	7-	16 10	
1109 002	SIGMA Y POSITION	17-	26 10	
1109 003	SIGMA Z POSITION	27-	36 10	
1106 002	COVARIANCE DATA ELEMENT 22	37-	46 10	
1106 003	COVARIANCE DATA ELEMENT 33	47-	56 10	
1110 006	SIGN OF COVARIANCE DATA ELEMENT 23 (SGN COV 23)	57	1	
1103 006	ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 23	58-	67 10	
1110 001	SIGN OF COVARIANCE DATA ELEMENT 12 (SGN COV 12)	68	1	
1110 002	SIGN OF COVARIANCE DATA ELEMENT 13 (SGN COV 13)	69	1	

FIELD CODING FOR J3.6C1

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1109	001	SIGMA X POSITION -----		REPRESENTS THE SQUARE ROOT OF THE VARIANCE OF THE ERROR IN THE X AXIS POSITION STATE VECTOR EXPRESSED IN THE ECF WGS-84 COORDINATE SYSTEM. IN LOGARITHMIC INCREMENTS FROM 1 FOOT THROUGH 1,000,000 FEET ACCORDING TO THE FORMULA TRUNCATE (ALPHA TIMES LN (SIGMA SUB X OVER 1.0 FEET) PLUS 0.5), WHERE LN IS THE NATURAL LOGARITHM AND ALPHA EQUALS 1022 OVER LN (TEN TO THE SIXTH POWER).
		1 THROUGH 1,000,000 FEET	0 THROUGH 1022	
		NO STATEMENT	1023	
1109	002	SIGMA Y POSITION -----		REPRESENTS THE SQUARE ROOT OF THE VARIANCE OF THE ERROR IN THE Y AXIS POSITION STATE VECTOR EXPRESSED IN THE ECF WGS-84 COORDINATE SYSTEM. IN LOGARITHMIC INCREMENTS FROM 1 FOOT THROUGH 1,000,000 FEET ACCORDING TO THE FORMULA TRUNCATE (ALPHA TIMES LN (SIGMA SUB X OVER 1.0 FEET) PLUS 0.5), WHERE LN IS THE NATURAL LOGARITHM AND ALPHA EQUALS 1022 OVER LN (TEN TO THE SIXTH POWER).
		1 THROUGH 1,000,000 FEET	0 THROUGH 1022	
		NO STATEMENT	1023	
1109	003	SIGMA Z POSITION -----		REPRESENTS THE SQUARE ROOT OF THE VARIANCE OF THE ERROR IN THE Z AXIS POSITION STATE VECTOR EXPRESSED IN THE ECF WGS-84 COORDINATE SYSTEM. IN LOGARITHMIC INCREMENTS FROM 1 FOOT THROUGH 1,000,000 FEET ACCORDING TO THE FORMULA TRUNCATE (ALPHA TIMES LN (SIGMA SUB X OVER 1.0 FEET) PLUS 0.5), WHERE LN IS THE NATURAL LOGARITHM AND ALPHA EQUALS 1022 OVER LN (TEN TO THE SIXTH POWER).
		1 THROUGH 1,000,000 FEET	0 THROUGH 1022	
		NO STATEMENT	1023	
1106	002	COVARIANCE DATA ELEMENT 22 -----		REPRESENTS THE ELEMENT OCCUPYING ROW 2, COLUMN 2 OF THE COVARIANCE DATA MATRIX.

FIELD CODING FOR J3.6C1 (SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1106	002	COVARIANCE DATA ELEMENT 22 ----- 0 THROUGH 1	(CONTINUED) 0 THROUGH 1023	ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT IN INCREMENTS OF 1/1023.
1110	006	SIGN OF COVARIANCE DATA ELEMENT 23 ----- POSITIVE NEGATIVE	 0 1	SIGN OF THE COVARIANCE DATA ELEMENT 23.
1103	006	ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 23 ----- 0 THROUGH 1	 0 THROUGH 1023	ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 23. ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT IN 1/1023 INCREMENTS.

.....

WORD TITLE: SPACE TRACK CONTINUATION WORD

24	23	22	21	20	19	18	17:	16	15	14	13	12	11	10	09	08	07:	06	05	04	03	02:	01	00:	
SIGMA Y VELOCITY							:	SIGMA X VELOCITY							:	CONTINUATION WORD							:	WORD	:
							:								:	LABEL							:	FORMAT	:
							:								:								:		:
10							:	10							:	5							:	2	:

49:	48:	47	46	45	44	43	42	41	40	39	38:	37:	36	35	34	33	32	31	30	29	28	27:	26	25
:SGN:		ABSOLUTE VALUE OF COVARIANCE DATA										:SGN:												
<---		:COV:	ELEMENT 24										:COV:		SIGMA Z VELOCITY									
:34 :												:24 :												
: 1 :		10										: 1 :		10										

: 69:	68	67	66	65	64	63	62	61	60	59:	58	57	56	55	54	53	52	51	50		
:SGN:											:	ABSOLUTE VALUE OF COVARIANCE DATA									
:COV:	COVARIANCE DATA ELEMENT 44										:	ELEMENT 34									
:14 :											:										
: 1 :	10										:	10									

WORD DESCRIPTION

WORD NUMBER: J3.6C2

WORD TITLE: SPACE TRACK CONTINUATION WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	00010
1109 004	SIGMA X VELOCITY	7-	16 10	
1109 005	SIGMA Y VELOCITY	17-	26 10	
1109 006	SIGMA Z VELOCITY	27-	36 10	
1110 007	SIGN OF COVARIANCE DATA	37	1	
	ELEMENT 24 (SGN COV 24)			
1103 007	ABSOLUTE VALUE OF COVARIANCE	38-	47 10	
	DATA ELEMENT 24			
1110 010	SIGN OF COVARIANCE DATA	48	1	
	ELEMENT 34 (SGN COV 34)			
1103 010	ABSOLUTE VALUE OF COVARIANCE	49-	58 10	
	DATA ELEMENT 34			
1106 004	COVARIANCE DATA ELEMENT 44	59-	68 10	
1110 003	SIGN OF COVARIANCE DATA	69	1	
	ELEMENT 14 (SGN COV 14)			

FIELD CODING FOR J3.6C2

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1109	004	SIGMA X VELOCITY -----		
		1 THROUGH 1,312,336 FT/ SEC	0 THROUGH 1022	REPRESENTS THE SQUARE ROOT OF THE VARIANCE OF THE ERROR IN THE X AXIS VELOCITY STATE VECTOR EXPRESSED IN THE ECF WGS-84 COORDINATE SYSTEM. IN LOGARITHMIC INCREMENTS FROM 1 FT/SEC THROUGH 1,312,336 FT/SEC ACCORDING TO THE FORMULA TRUNCATE (ALPHA TIMES LN (SIGMA SUB X OVER 1.0 FT PER SEC) PLUS 0.5), WHERE LN IS THE NATURAL LOGARITHM AND ALPHA EQUALS 1022 OVER LN (1,312,336).
		NO STATEMENT	1023	
1109	005	SIGMA Y VELOCITY -----		
		1 THROUGH 1,312,336 FT/ SEC	0 THROUGH 1022	REPRESENTS THE SQUARE ROOT OF THE VARIANCE OF THE ERROR IN THE Y AXIS VELOCITY STATE VECTOR EXPRESSED IN THE ECF WGS-84 COORDINATE SYSTEM. IN LOGARITHMIC INCREMENTS FROM 1 FT/SEC THROUGH 1,312,336 FT/SEC ACCORDING TO THE FORMULA TRUNCATE (ALPHA TIMES LN (SIGMA SUB X OVER 1.0 FT PER SEC) PLUS 0.5), WHERE LN IS THE NATURAL LOGARITHM AND ALPHA EQUALS 1022 OVER LN (1,312,336).
		NO STATEMENT	1023	
1109	006	SIGMA Z VELOCITY -----		
		1 THROUGH 1,312,336 FT/ SEC	0 THROUGH 1022	REPRESENTS THE SQUARE ROOT OF THE VARIANCE OF THE ERROR IN THE Z AXIS VELOCITY STATE VECTOR EXPRESSED IN THE ECF WGS-84 COORDINATE SYSTEM. IN LOGARITHMIC INCREMENTS FROM 1 FT/SEC THROUGH 1,312,336 FT/SEC ACCORDING TO THE FORMULA TRUNCATE (ALPHA TIMES LN (SIGMA SUB X OVER 1.0 FT PER SEC) PLUS 0.5), WHERE LN IS THE NATURAL LOGARITHM AND ALPHA EQUALS 1022 OVER LN (1,312,336).
		NO STATEMENT	1023	
1110	007	SIGN OF COVARIANCE DATA ELEMENT 24 -----		SIGN OF THE COVARIANCE DATA ELEMENT 24.

FIELD CODING FOR J3.6C2 (SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1110	007	SIGN OF COVARIANCE DATA ELEMENT 24 ----- POSITIVE NEGATIVE	(CONTINUED) 0 1	
1103	007	ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 24 ----- 0 THROUGH 1	0 THROUGH 1023	ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 24. ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT IN 1/1023 INCREMENTS.
1106	004	COVARIANCE DATA ELEMENT 44 ----- 0 THROUGH 1	0 THROUGH 1023	REPRESENTS THE ELEMENT OCCUPYING ROW 4, COLUMN 4 OF THE COVARIANCE DATA MATRIX. ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT IN INCREMENTS OF 1/1023.

.....

WORD TITLE: SPACE TRACK CONTINUATION WORD

:	49	48	47	46	45	44	43	42	41	40:	39	38	37	36	35	34	33	32	31	30:	29:	28	27	26	25				
:											:	ABSOLUTE VALUE OF COVARIANCE DATA										:	SGN:						
:	COVARIANCE DATA ELEMENT 55										:	ELEMENT 45										:	COV:	---					
:											:											:	45 :						
:	10										:	10										:	1 :						

```

-----
: 69: 68 67 66 65 64 63 62 61 60 59 58 57 56 55 54 53 52 51: 50:
:      :                               BALLISTIC MISSILE BETA                                :SGN:
:SP: -----                           -----                                     :COV:
:      :                               BALLISTIC MISSILE ACCELERATION                            :15 :
-----
: 1 :                                   18                                           : 1 :

```

WORD DESCRIPTION

WORD NUMBER: J3.6C3
WORD TITLE: SPACE TRACK CONTINUATION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	01
1551	001	CONTINUATION WORD LABEL	2-	6 5	00011
1110	008	SIGN OF COVARIANCE DATA	7	1	
		ELEMENT 25 (SGN COV 25)			
1103	008	ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 25	8-	17 10	
1110	011	SIGN OF COVARIANCE DATA	18	1	
		ELEMENT 35 (SGN COV 35)			
1103	011	ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 35	19-	28 10	
1110	013	SIGN OF COVARIANCE DATA	29	1	
		ELEMENT 45 (SGN COV 45)			
1103	013	ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 45	30-	39 10	
1106	005	COVARIANCE DATA ELEMENT 55	40-	49 10	
1110	004	SIGN OF COVARIANCE DATA	50	1	
		ELEMENT 15 (SGN COV 15)			
1105	001	BALLISTIC MISSILE BETA	51-	68 18	
1104	001	BALLISTIC MISSILE ACCELERATION	51-	68 18	
756	001	SPARE (SP)	69	1	

FIELD CODING FOR J3.6C3

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1110	008	SIGN OF COVARIANCE DATA ELEMENT 25 ----- POSITIVE NEGATIVE	0 1	SIGN OF THE COVARIANCE DATA ELEMENT 25.
1103	008	ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 25 ----- 0 THROUGH 1	0 THROUGH 1023	ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 25. ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT IN 1/1023 INCREMENTS.
1106	005	COVARIANCE DATA ELEMENT 55 ----- 0 THROUGH 1	0 THROUGH 1023	REPRESENTS THE ELEMENT OCCUPYING ROW 5, COLUMN 5 OF THE COVARIANCE DATA MATRIX. ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT IN INCREMENTS OF 1/1023.
1105	001	BALLISTIC MISSILE BETA ----- NO STATEMENT 0 THROUGH 3,145.692 MASS POUNDS PER SQUARE FEET >3,145.692 MASS POUNDS PER SQUARE FEET	0 1 THROUGH 262142 262143	THIS FIELD IS ONLY INTERPRETED WHEN BOOST INDICATOR FIELD IS SET TO VALUE 0, NOT IN BOOST. EXPRESSES MEASURED ATMOSPHERIC DRAG EFFECTS ON A BALLISTIC MISSILE WITH A CONSTANT REFERENCE AREA. BETA IS DEFINED AS THE MASS OF THE OBJECT DIVIDED BY THE PRODUCT OF ITS COEFFICIENT OF DRAG AND REFERENCE AREA. IN 0.012 MASS POUNDS PER SQUARE FEET INCREMENTS.
1104	001	BALLISTIC MISSILE ACCELERATION ----- NO STATEMENT TBD	0 1 THROUGH 262143	THIS FIELD IS ONLY INTERPRETED WHEN BOOST INDICATOR IS SET TO VALUE 1, BOOST.

5.1-806

MIL-STD-6016B

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: SPACE TRACK CONTINUATION WORD

49	48	47	46	45	44	43	42	41:	40:	39	38	37	36	35	34	33	32	31	30:	29:	28	27	26	25
ABSOLUTE VALUE OF COVARIANCE DATA :SGN:									ABSOLUTE VALUE OF COVARIANCE DATA :SGN:															
ELEMENT 56 :COV:									ELEMENT 46 :COV:									---						
10 : 1 :									10 : 1 :															

```

: 69 68 67 66 65 64 63 62: 61: 60 59 58 57 56 55 54 53 52 51: 50
-----
:                                     :SGN:                                     :
:                                     :COV:      COVARIANCE DATA ELEMENT 66      :---->
:                                     :16 :                                     :
-----
:           8           : 1 :           10           :

```

WORD DESCRIPTION

WORD NUMBER: J3.6C4
WORD TITLE: SPACE TRACK CONTINUATION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	01
1551	001	CONTINUATION WORD LABEL	2-	6 5	00100
1110	009	SIGN OF COVARIANCE DATA ELEMENT 26 (SGN COV 26)	7	1	
1103	009	ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 26	8-	17 10	
1110	012	SIGN OF COVARIANCE DATA ELEMENT 36 (SGN COV 36)	18	1	
1103	012	ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 36	19-	28 10	
1110	014	SIGN OF COVARIANCE DATA ELEMENT 46 (SGN COV 46)	29	1	
1103	014	ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 46	30-	39 10	
1110	015	SIGN OF COVARIANCE DATA ELEMENT 56 (SGN COV 56)	40	1	
1103	015	ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 56	41-	50 10	
1106	006	COVARIANCE DATA ELEMENT 66	51-	60 10	
1110	005	SIGN OF COVARIANCE DATA ELEMENT 16 (SGN COV 16)	61	1	
756	008	SPARE	62-	69 8	

FIELD CODING FOR J3.6C4 (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1110	009	SIGN OF COVARIANCE DATA ELEMENT 26 ----- POSITIVE NEGATIVE	 0 1	SIGN OF THE COVARIANCE DATA ELEMENT 26.
1103	009	ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 26 ----- 0 THROUGH 1	 0 THROUGH 1023	ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 26. ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT IN 1/1023 INCREMENTS.
1106	006	COVARIANCE DATA ELEMENT 66 ----- 0 THROUGH 1	 0 THROUGH 1023	REPRESENTS THE ELEMENT OCCUPYING ROW 6, COLUMN 6 OF THE COVARIANCE DATA MATRIX. ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT IN INCREMENTS OF 1/1023.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: SPACE TRACK CONTINUATION WORD

49	48	47:	46	45	44	43	42	41	40	39	38	37:	36	35	34	33	32	31	30	29	28	27:	26	25				
<---			:	VELOCITY COVARIANCE DATA ELEMENT 22										:	SIGMA Z VELOCITY										:	--->		
			:	10										:	10										:			

```

: 69: 68: 67 66 65 64 63 62 61 60 59 58: 57: 56 55 54 53 52 51 50
-----
:SGN:SGN: ABSOLUTE VALUE OF VELOCITY COVARIANCE :SGN: VELOCITY COVARIANCE DATA
:VEL:VEL: DATA ELEMENT 23 :VEL: ELEMENT 33
:C13:C12: :C23:
-----
: 1 : 1 : 10 : 1 : 10

```

WORD DESCRIPTION

WORD NUMBER: J3.6C5
WORD TITLE: SPACE TRACK CONTINUATION WORD

REFERENCE			BIT	#	
DFI/DUI	DATA FIELD	DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD	FORMAT	0-	1 2	01
1551 001	CONTINUATION	WORD LABEL	2-	6 5	00101
1109 004	SIGMA	X VELOCITY	7-	16 10	
1109 005	SIGMA	Y VELOCITY	17-	26 10	
1109 006	SIGMA	Z VELOCITY	27-	36 10	
1112 004	VELOCITY	COVARIANCE DATA	37-	46 10	
		ELEMENT 22			
1112 006	VELOCITY	COVARIANCE DATA	47-	56 10	
		ELEMENT 33			
1110 018	SIGN OF	VELOCITY COVARIANCE	57	1	
		DATA ELEMENT 23 (SGN VEL C23)			
1103 016	ABSOLUTE	VALUE OF VELOCITY	58-	67 10	
		COVARIANCE DATA ELEMENT 23			
1110 016	SIGN OF	VELOCITY COVARIANCE	68	1	
		DATA ELEMENT 12 (SGN VEL C12)			
1110 017	SIGN OF	VELOCITY COVARIANCE	69	1	
		DATA ELEMENT 13 (SGN VEL C13)			

FIELD CODING FOR J3.6C5

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1109	004	SIGMA X VELOCITY -----		
		1 THROUGH 1,312,336 FT/ SEC	0 THROUGH 1022	REPRESENTS THE SQUARE ROOT OF THE VARIANCE OF THE ERROR IN THE X AXIS VELOCITY STATE VECTOR EXPRESSED IN THE ECF WGS-84 COORDINATE SYSTEM. IN LOGARITHMIC INCREMENTS FROM 1 FT/SEC THROUGH 1,312,336 FT/SEC ACCORDING TO THE FORMULA TRUNCATE (ALPHA TIMES LN (SIGMA SUB X OVER 1.0 FT PER SEC) PLUS 0.5), WHERE LN IS THE NATURAL LOGARITHM AND ALPHA EQUALS 1022 OVER LN (1,312,336).
		NO STATEMENT	1023	
1109	005	SIGMA Y VELOCITY -----		
		1 THROUGH 1,312,336 FT/ SEC	0 THROUGH 1022	REPRESENTS THE SQUARE ROOT OF THE VARIANCE OF THE ERROR IN THE Y AXIS VELOCITY STATE VECTOR EXPRESSED IN THE ECF WGS-84 COORDINATE SYSTEM. IN LOGARITHMIC INCREMENTS FROM 1 FT/SEC THROUGH 1,312,336 FT/SEC ACCORDING TO THE FORMULA TRUNCATE (ALPHA TIMES LN (SIGMA SUB X OVER 1.0 FT PER SEC) PLUS 0.5), WHERE LN IS THE NATURAL LOGARITHM AND ALPHA EQUALS 1022 OVER LN (1,312,336).
		NO STATEMENT	1023	
1109	006	SIGMA Z VELOCITY -----		
		1 THROUGH 1,312,336 FT/ SEC	0 THROUGH 1022	REPRESENTS THE SQUARE ROOT OF THE VARIANCE OF THE ERROR IN THE Z AXIS VELOCITY STATE VECTOR EXPRESSED IN THE ECF WGS-84 COORDINATE SYSTEM. IN LOGARITHMIC INCREMENTS FROM 1 FT/SEC THROUGH 1,312,336 FT/SEC ACCORDING TO THE FORMULA TRUNCATE (ALPHA TIMES LN (SIGMA SUB X OVER 1.0 FT PER SEC) PLUS 0.5), WHERE LN IS THE NATURAL LOGARITHM AND ALPHA EQUALS 1022 OVER LN (1,312,336).
		NO STATEMENT	1023	
1112	004	VELOCITY COVARIANCE DATA ELEMENT 22 -----		REPRESENTS THE ELEMENT OCCUPYING ROW 2, COLUMN 2 OF THE VELOCITY COVARIANCE DATA MATRIX.

FIELD CODING FOR J3.6C5

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1112	004	VELOCITY COVARIANCE DATA ELEMENT 22 ----- 0 THROUGH 1	(CONTINUED) 0 THROUGH 1023	ABSOLUTE VALUE OF VELOCITY COVARIANCE DATA ELEMENT IN INCREMENTS OF 1/1023.
1110	018	SIGN OF VELOCITY COVARIANCE DATA ELEMENT 23 ----- POSITIVE NEGATIVE	 0 1	SIGN OF THE VELOCITY COVARIANCE DATA ELEMENT 23.
1103	016	ABSOLUTE VALUE OF VELOCITY COVARIANCE DATA ELEMENT 23 ----- 0 THROUGH 1	 0 THROUGH 1023	ABSOLUTE VALUE OF VELOCITY COVARIANCE DATA ELEMENT 23. ABSOLUTE VALUE OF VELOCITY COVARIANCE DATA ELEMENT IN 1/1023 INCREMENTS.
1110	016	SIGN OF VELOCITY COVARIANCE DATA ELEMENT 12 ----- POSITIVE NEGATIVE	 0 1	SIGN OF THE VELOCITY COVARIANCE DATA ELEMENT 12.
1110	017	SIGN OF VELOCITY COVARIANCE DATA ELEMENT 13 ----- POSITIVE NEGATIVE	 0 1	SIGN OF THE VELOCITY COVARIANCE DATA ELEMENT 13.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

J3.7 MESSAGE SUMMARY

PURPOSE

The J3.7 Electronic Warfare Product Information message provides the means to exchange tactically significant information that has been derived from electromagnetic sources.

DATA ELEMENT SUMMARY

<u>J3.7I</u>		<u>J3.7C2 (Continued)</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	LONGITUDE, 0.0051 MINUTE	22
LABEL, J-SERIES	5	AREA MAJOR AXIS	6
SUBLABEL, J-SERIES	3	AREA MINOR AXIS	6
MESSAGE LENGTH INDICATOR	3	AXIS ORIENTATION	8
EXERCISE INDICATOR	1		
FORCE TELL INDICATOR	1	<u>J3.7C3</u>	
EMERGENCY INDICATOR	1	DATA ELEMENT	# BITS
SPECIAL PROCESSING INDICATOR	1	WORD FORMAT	2
SIMULATION INDICATOR	1	CONTINUATION WORD LABEL	5
TRACK NUMBER, REFERENCE	19	COURSE	9
RESPONSE INDICATOR	1	SPEED	11
FIX OR BEARING DESCRIPTOR	3	ALTITUDE, 25 FT	13
SECOND	6	EMITTER NUMBER INDICATOR	3
MINUTE	6	EMITTER NUMBER	16
HOURL	5	WARTIME RESERVE MODE INDICATOR	1
IDENTITY DIFFERENCE INDICATOR	1	EMITTER CONFIDENCE	3
DISUSED	4	DISUSED	4
SQUARE/CIRCLE SWITCH	2	SPARE	3
IDENTITY(3)*****			
IDENTITY AMPLIFYING	*	<u>J3.7C4</u>	
DESCRIPTOR(3)*****	3	DATA ELEMENT	# BITS
DISUSED	1	WORD FORMAT	2
SPARE	1	CONTINUATION WORD LABEL	5
		SPACE PLATFORM(6)*****	
<u>J3.7C1</u>		AIR PLATFORM(6)	*
DATA ELEMENT	# BITS	SURFACE (MARITIME) PLATFORM(6)*	
WORD FORMAT	2	SUBSURFACE (MARITIME)	*
CONTINUATION WORD LABEL	5	PLATFORM(6)	*
DISUSED	7	LAND (GROUND) PLATFORM(6)	*
BEARING ORIGIN	1	SPARE(6)*****	6
BEARING	12	MODE NUMBER	6
TRACK NUMBER, ORIGIN	19	SPARE	2
BEARING ACCURACY	4	FREQUENCY/FREQUENCY RANGE	1
ELEVATION ANGLE	10	INDICATOR	
PLATFORM EVALUATION CONFIDENCE	3	FREQUENCY MULTIPLIER, 1	4
IDENTITY CONFIDENCE	4	FREQUENCY, 1	20
ENVIRONMENT/CATEGORY	3	FREQUENCY MULTIPLIER, 2	4
		FREQUENCY, 2	20
<u>J3.7C2</u>		<u>J3.7C5</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	WORD FORMAT	2
CONTINUATION WORD LABEL	5	CONTINUATION WORD LABEL	5
LATITUDE, 0.0051 MINUTE	21		

MIL-STD-6016B

J3.7 MESSAGE SUMMARY (Continued)

DATA ELEMENT SUMMARY (Continued)

J3.7C5 (Continued)	
DATA ELEMENT	# BITS
SPACE SPECIFIC TYPE(12)*****	*
AIR SPECIFIC TYPE(12)	*
SURFACE (MARITIME) SPECIFIC	*
TYPE(12)	*
SUBSURFACE (MARITIME) SPECIFIC	*
TYPE(12)	*
LAND (GROUND) SPECIFIC	*
TYPE(12)*****	12
SPARE	51

MIL-STD-6016B

J3.7 TRANSMIT/RECEIVE RULES

TITLE: Electronic Warfare Product Information Message

TRANSMIT RULES

1. The J3.7 Electronic Warfare Product Information message shall be transmitted in the word sequences described in table J3-4.
2. The J3.7 message shall be transmitted once by the originating JU:
 - a. When initiated.
 - b. When requested by a J7.1 (ACT = 0 or 1) Data Update Request message.
 - c. When an alert is initiated or terminated on the information contained in the message.
 - d. When the bearing shift exceeds system accuracy or five degrees, whichever is greater.
 - e. When the value of any other data element in the message changes, except Minute, Hour, Second, Bearing Origin (except as specified in rule 3), or frequency changes of less than 1% (unless another frequency change criterion is pre-selected by operator action). However, this update shall not exceed once every six seconds.
 - f. Periodically at an RRN = 4 (48 seconds, 36-60 second interval).
3. Bearing Origin changes may be used as criteria for message updates to meet system requirements. However, this update shall not exceed once every six seconds.
4. The J3.7 messages reporting LOBs shall cease being transmitted when the LOBs are fused into a fix or an AOP. A new TN shall be assigned for the initial report of the new fix or AOP and a J7.0 (ACT = 0) Drop Track message shall be sent on all LOBs used in establishing the fix or AOP.

J3.7 TRANSMIT/RECEIVE RULES (Continued)

RECEIVE RULES

There are no receive rules specified for this message.

TABLE J3-4 Required Word Sequences For Lines of Bearing (LOBs), Fixes,
Areas of Probability (AOPs) and EW Tracks
(Sheet 1 of 3)

Serial	Type of Report	Limit of 3 Words Per Time Slot	More Than 3 Words Available Per Time Slot
1	Basic LOB, Fix or AOP.	J3.7I/J3.7C1/J3.7C2.	
2	Basic Fix or AOP with Course and Speed.	J3.7I/J3.7C1/J3.7C2, followed by a J3.7I/J3.7C3 sequence.	J3.7I/J3.7C1/J3.7C2/J3.7C3
3	LOB, Fix or AOP with Emitter (Fix or AOP with or without Course and Speed).	J3.7I/J3.7C1/J3.7C2, followed by a J3.7I/J3.7C3 sequence.	J3.7I/J3.7C1/J3.7C2/J3.7C3
4	LOB, Fix or AOP with Platform.	J3.7I/J3.7C1/J3.7C2, followed by a J3.7I/J3.7C4 sequence.	J3.7I/J3.7C1/J3.7C2/J3.7C4
5	Fix or AOP with Platform, Course and Speed.	J3.7I/J3.7C1/J3.7C2, followed by a J3.7I/J3.7C3/J3.7C4 sequence.	J3.7I/J3.7C1/J3.7C2/J3.7C3/J3.7C4
6	LOB, Fix or AOP with Frequency.	J3.7I/J3.7C1/J3.7C2, followed by a J3.7I/J3.7C4 sequence.	J3.7I/J3.7C1/J3.7C2/J3.7C4
7	Fix or AOP with Frequency, Course and Speed.	J3.7I/J3.7C1/J3.7C2, followed by a J3.7I/J3.7C3/J3.7C4 sequence.	J3.7I/J3.7C1/J3.7C2/J3.7C3/J3.7C4
8	LOB, Fix or AOP with Specific Type.	J3.7I/J3.7C1/J3.7C2, followed by a J3.7I/J3.7C5 sequence.	J3.7I/J3.7C1/J3.7C2/J3.7C5
9	Fix or AOP with Specific Type, Course and Speed.	J3.7I/J3.7C1/J3.7C2, followed by a J3.7I/J3.7C3/J3.7C5 sequence.	J3.7I/J3.7C1/J3.7C2/J3.7C3/J3.7C5
10	LOB, Fix or AOP with Emitter and Platform (Fix or AOP with or without Course and Speed).	J3.7I/J3.7C1/J3.7C2, followed by a J3.7I/J3.7C3/J3.7C4 sequence.	J3.7I/J3.7C1/J3.7C2/J3.7C3/J3.7C4
11	LOB, Fix or AOP with Emitter, and Frequency and/or Mode (Fix or AOP with or without Course and Speed).	J3.7I/J3.7C1/J3.7C2, followed by a J3.7I/J3.7C3/J3.7C4 sequence.	J3.7I/J3.7C1/J3.7C2/J3.7C3/J3.7C4
12	LOB, Fix or AOP with Emitter and Specific Type (Fix or AOP with or without Course and Speed).	J3.7I/J3.7C1/J3.7C2, followed by a J3.7I/J3.7C3/J3.7C5 sequence.	J3.7I/J3.7C1/J3.7C2/J3.7C3/J3.7C5

5.1-821

MIL-STD-6016B

TABLE J3-4 Required Word Sequences For Lines of Bearing (LOBs), Fixes,
Areas of Probability (AOPs) and EW Tracks
(Sheet 2 of 3)

Serial	Type of Report	Limit of 3 Words Per Time Slot	More Than 3 Words Available Per Time Slot
13	LOB, Fix or AOP with Platform and Frequency.	J3.7I/J3.7C1/J3.7C2, followed by a J3.7I/J3.7C4 sequence.	J3.7I/J3.7C1/J3.7C2/J3.7C4
14	Fix or AOP with Platform, Frequency, Course and Speed.	J3.7I/J3.7C1/J3.7C2, followed by a J3.7I/J3.7C3/J3.7C4 sequence.	J3.7I/J3.7C1/J3.7C2/J3.7C3/J3.7C4
15	LOB, Fix or AOP with Frequency and Specific Type.	J3.7I/J3.7C1/J3.7C2, followed by a J3.7I/J3.7C4/J3.7C5 sequence.	J3.7I/J3.7C1/J3.7C2/J3.7C4/J3.7C5
16	Fix or AOP with Frequency, Specific Type, Course and Speed.	J3.7I/J3.7C1/J3.7C2, followed by J3.7I/J3.7C3/J3.7C4 and J3.7I/ J3.7C5 sequences.	J3.7I/J3.7C1/J3.7C2/J3.7C3/J3.7C4/ J3.7C5
17	LOB, Fix or AOP with Emitter, Platform, and Frequency and/or Mode (Fix or AOP with or without Course and Speed).	J3.7I/J3.7C1/J3.7C2, followed by a J3.7I/J3.7C3/J3.7C4 sequence.	J3.7I/J3.7C1/J3.7C2/J3.7C3/J3.7C4
18	LOB, Fix or AOP with Emitter, Specific Type, and Frequency and/or Mode (Fix or AOP with or without Course and Speed).	J3.7I/J3.7C1/J3.7C2, followed by J3.7I/J3.7C3/J3.7C4 and J3.7I/ J3.7C5 sequences.	J3.7I/J3.7C1/J3.7C2/J3.7C3/J3.7C4/ J3.7C5
19	Basic Track.	J3.7I/J3.7C1/J3.7C2, followed by a J3.7I/J3.7C3 sequence.	J3.7I/J3.7C1/J3.7C2/J3.7C3
20	Track with Emitter.	J3.7I/J3.7C1/J3.7C2, followed by a J3.7I/J3.7C3 sequence.	J3.7I/J3.7C1/J3.7C2/J3.7C3
21	Track with Platform.	J3.7I/J3.7C1/J3.7C2, followed by a J3.7I/J3.7C3/J3.7C4 sequence.	J3.7I/J3.7C1/J3.7C2/J3.7C3/J3.7C4
22	Track with Frequency.	J3.7I/J3.7C1/J3.7C2, followed by a J3.7I/J3.7C3/J3.7C4 sequence.	J3.7I/J3.7C1/J3.7C2/J3.7C3/J3.7C4
23	Track with Specific Type.	J3.7I/J3.7C1/J3.7C2, followed by a J3.7I/J3.7C3/J3.7C5 sequence.	J3.7I/J3.7C1/J3.7C2/J3.7C3/J3.7C5

TABLE J3-4 Required Word Sequences For Lines of Bearing (LOBs), Fixes,
Areas of Probability (AOPs) and EW Tracks
(Sheet 3 of 3)

Serial	Type of Report	Limit of 3 Words Per Time Slot	More Than 3 Words Available Per Time Slot
24	Track with Emitter and Platform.	J3.7I/J3.7C1/J3.7C2, followed by a J3.7I/J3.7C3/J3.7C4 sequence.	J3.7I/J3.7C1/J3.7C2/J3.7C3/J3.7C4
25	Track with Emitter, and Frequency and/or Mode.	J3.7I/J3.7C1/J3.7C2, followed by a J3.7I/J3.7C3/J3.7C4 sequence.	J3.7I/J3.7C1/J3.7C2/J3.7C3/J3.7C4
26	Track with Emitter and Specific Type.	J3.7I/J3.7C1/J3.7C2, followed by a J3.7I/J3.7C3/J3.7C5 sequence.	J3.7I/J3.7C1/J3.7C2/J3.7C3/J3.7C5
27	Track with Platform and Frequency.	J3.7I/J3.7C1/J3.7C2, followed by a J3.7I/J3.7C3/J3.7C4 sequence.	J3.7I/J3.7C1/J3.7C2/J3.7C3/J3.7C4
28	Track with Frequency and Specific Type.	J3.7I/J3.7C1/J3.7C2, followed by J3.7I/J3.7C3/J3.7C4 and J3.7I/ J3.7C5 sequences.	J3.7I/J3.7C1/J3.7C2/J3.7C3/J3.7C4/ J3.7C5
29	Track with Emitter, Platform, and Frequency and/or Mode.	J3.7I/J3.7C1/J3.7C2, followed by a J3.7I/J3.7C3/J3.7C4 sequence.	J3.7I/J3.7C1/J3.7C2/J3.7C3/J3.7C4
30	Track with Emitter, Specific Type, and Frequency and/or Mode.	J3.7I/J3.7C1/J3.7C2, followed by J3.7I/J3.7C3/J3.7C4 and J3.7I/ J3.7C5 sequences.	J3.7I/J3.7C1/J3.7C2/J3.7C3/J3.7C4/ J3.7C5

.....

WORD TITLE: ELECTRONIC WARFARE PRODUCT INFORMATION INITIAL WORD

24	23	22	21	20	19	18:	17:	16:	15:	14:	13:	12	11	10:	09	08	07:	06	05	04	03	02:	01	00:		
						:SIM:	:EMG:FT	:EX	:	MESSAGE	:	SUBLABEL,	:							:WORD	:					
<---						:IND:SPI:	IND:IND:	IND:	:	LENGTH	:	J-SERIES	:	LABEL, J-SERIES						:FORMAT	:					
						:	:	:	:	:	:	INDICATOR	:							:	:					
						:	1	:	1	:	1	:	1	:	1	:	1	:	3	:	3	:	5	:	2	:

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
<---			:						:	FIX OR		:	RSP:											
			:	SECOND					:	BEARING		:	IND:		TRACK NUMBER, REFERENCE									
			:						:	DESCRIPTOR		:												
			:	6					:	3		:	1 :		19									

:	69:	68:	67	66	65:	64	63:	62	61	60	59:	58:	57	56	55	54	53:	52	51	50	
:	:	:	IDENTITY			:SQUARE/:			:	:	:	:	:	:	:	:	:	:	:	:	
:	SP	:	DUD:	:	:	:	:	DISUSED			:	ID	:	:	HOUR			:	:	MINUTE	
:	:	:	:	ID	AMP	:	SWITCH	:	:	:	:	DIF	:	:	:	:	:	:	:	:	
:	:	:	:	DESCR	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
:	1	:	1	:	:	3	:	:	2	:	:	4	:	1	:	:	5	:	:	6	

WORD DESCRIPTION

WORD NUMBER: J3.7I

WORD TITLE: ELECTRONIC WARFARE PRODUCT INFORMATION INITIAL WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	00
270	004	LABEL, J-SERIES	2-	6 5	00011
271	005	SUBLABEL, J-SERIES	7-	9 3	111
800	001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
385	003	EXERCISE INDICATOR (EX IND)	13	1	
354	002	FORCE TELL INDICATOR (FT IND)	14	1	
355	002	EMERGENCY INDICATOR (EMG IND)	15	1	
292	002	SPECIAL PROCESSING INDICATOR (SPI)	16	1	
1604	001	SIMULATION INDICATOR (SIM IND)	17	1	
769	002	TRACK NUMBER, REFERENCE	18-	36 19	
710	003	RESPONSE INDICATOR (RSP IND)	37	1	
382	004	FIX OR BEARING DESCRIPTOR (FIX BRG)	38-	40 3	
380	001	SECOND	41-	46 6	
797	004	MINUTE	47-	52 6	
792	001	HOUR	53-	57 5	
1860	001	IDENTITY DIFFERENCE INDICATOR (ID DIF)	58	1	
758	004	DISUSED	59-	62 4	
351	009	SQUARE/CIRCLE SWITCH (S/C SW)	63-	64 2	
376	007	IDENTITY	65-	67 3	
376	001	IDENTITY AMPLIFYING DESCRIPTOR (ID AMP DESCR)	65-	67 3	
758	001	DISUSED (DUD)	68	1	
756	001	SPARE (SP)	69	1	

FIELD CODING FOR J3.7I					(SHEET 1)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION	
385	003	EXERCISE INDICATOR -----		INDICATES WHETHER OR NOT THE MESSAGE IDENTIFIES AN EXERCISE TRACK.	
		NON-EXERCISE TRACK	0		
		EXERCISE TRACK OR UNIT	1		
354	002	FORCE TELL INDICATOR -----		THIS INDICATOR CAUSES TRACK/POINT DATA TO BE FORCED THROUGH CONTROLLABLE RECEIVE FILTERS.	
		NO STATEMENT	0		
		FORCE TELL STATUS	1		
355	002	EMERGENCY INDICATOR -----		USED TO INDICATE WHETHER OR NOT A UNIT OR TRACK HAS AN EMERGENCY.	
		NO STATEMENT	0		
		EMERGENCY STATUS	1		
292	002	SPECIAL PROCESSING INDICATOR -----		INDICATES THAT A MESSAGE REQUIRES SPECIAL PROCESSING.	
		SPECIAL PROCESSING NOT REQUIRED	0		
		SPECIAL PROCESSING REQUIRED	1		
1604	001	SIMULATION INDICATOR -----		INDICATES WHETHER THE TRACK REFER- ENCED IN THE MESSAGE IS A REAL OR A SIMULATED TRACK.	
		REAL TRACK OR UNIT	0		
		SIMULATED TRACK OR UNIT	1		
769	002	TRACK NUMBER, REFERENCE -----		A REFERENCE NUMBER USED TO ASSOCIATE INFORMATION AND DIRECTIVES WITH THE TRACK.	
				THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE- BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE	

FIELD CODING FOR J3.7I (SHEET 2)				
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	

REPRESENTED BY AANN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6
00111	7
01000	A
01001	B
01010	C
01011	D
01100	E
01101	F
01110	G
01111	H
10000	J
10001	K
10010	L
10011	M
10100	N
10101	P
10110	Q
10111	R
11000	S
11001	T
11010	U
11011	V
11100	W
11101	X

		FIELD CODING FOR J3.7I		(SHEET 3)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
				11110 Y
				11111 Z
		00000	0	NO STATEMENT.
		00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		00077	63	ILLEGAL.
		00100-00175	64 THROUGH 125	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		00176	126	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		00177	127	COLLECTIVE ADDRESS.
		00200-07776	128 THROUGH 4094	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		07777	4095	ILLEGAL.
		0A000-0Z777	4096 THROUGH 16383	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		10000-17777	16384 THROUGH 20479	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		20000-27777	32768 THROUGH 36863	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G.,

			FIELD CODING FOR J3.7I	(SHEET 4)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		3A000-3Z777	53248 THROUGH 65535	TRACKS AND REFERENCE POINTS. ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		70000-77776	114688 THROUGH 118782	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.

FIELD CODING FOR J3.7I

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
710	003	RESPONSE INDICATOR -----		THIS FIELD INDICATES WHETHER OR NOT THE MESSAGE IS IN RESPONSE TO A DATA UPDATE REQUEST.
		NOT RESPONDING	0	MESSAGE IS NOT IN RESPONSE TO DATA UPDATE REQUEST.
		RESPONDING	1	MESSAGE IS IN RESPONSE TO DATA UPDATE REQUEST.
382	004	FIX OR BEARING DESCRIPTOR -----		DESCRIBES WHETHER THE MESSAGE REFERS TO A FIX, AREA OF PROBABILITY, OR TYPE OF BEARING.
		EW FIX	0	
		AREA OF PROBABILITY	1	
		BEARING, TYPE	2	LINE OF BEARING FOR WHICH THE REPORTING JU IS UNABLE TO SPECIFY THE BEARING AS ES, EA, OR RDF.
		NOT SPECIFIED		A LINE OF BEARING DERIVED FROM ES SOURCES OTHER THAN RDF.
		BEARING, ES	3	JAM STROBE.
		BEARING, EA	4	A LINE OF BEARING DERIVED FROM RADIO DIRECTION FINDING WITH NO ASSOCIATED PARAMETRIC DATA.
		BEARING, RADIO DIRECTION FINDING	5	
		DISUSED	6	
		BEARING, UNKNOWN	7	THE DIRECTION OF THE ARRIVAL OF THE SIGNAL IS UNKNOWN.
380	001	SECOND -----		THE SECOND OF THE MINUTE.
		0 THROUGH 59	0 THROUGH 59	
		ILLEGAL	60 THROUGH 62	IN ONE SECOND INCREMENTS.
		NO STATEMENT	63	
797	004	MINUTE -----		THE MINUTE OF THE HOUR.
		0 THROUGH 59	0 THROUGH 59	
		ILLEGAL	60 THROUGH 62	IN ONE MINUTE INCREMENTS.
		NO STATEMENT	63	
792	001	HOUR -----		EXPRESSES TIME OF DAY OR A PERIOD OF TIME IN HOURS.
		0 HOUR	0	
		1 THROUGH 23 HOURS	1 THROUGH 23	IN ONE HOUR INCREMENTS.
		ILLEGAL	24 THROUGH 30	
		NO STATEMENT	31	

5.1-830

MIL-STD-6016B

FIELD CODING FOR J3.7I

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1860	001	IDENTITY DIFFERENCE INDICATOR -----		THE IDENTITY DIFFERENCE INDICATOR IS USED TO INDICATE THAT A CONFLICT IN THE IDENTITY OF THE TRACK/REFERENCE TN IS CURRENTLY BEING EVALUATED BY THE UNIT WITH REPORTING RESPONSIBILITY.
		NO STATEMENT	0	NO IDENTITY DIFFERENCE EXISTS ON REFERENCE TN AT THIS TIME, OR PREVIOUS CONFLICT HAS BEEN RESOLVED.
		IDENTITY DIFFERENCE	1	AN IDENTITY DIFFERENCE EXISTS ON REFERENCE TN. THE IDENTITY BEING REPORTED IS THE LATEST IDENTITY LOCALLY HELD BY THE UNIT WITH REPORTING RESPONSIBILITY PRIOR TO THE CONFLICT, NOT THE CONFLICTING IDENTITY CURRENTLY UNDER OPERATOR EVALUATION.
351	009	SQUARE/CIRCLE SWITCH -----		USED IN CONJUNCTION WITH THE LATITUDE, LONGITUDE, AREA MAJOR AXIS, AREA MINOR AXIS, AND AXIS ORIENTATION FIELDS TO DESCRIBE AN AREA.
		NO STATEMENT	0	
		SQUARE/RECTANGULAR	1	IF AREA MAJOR AND AREA MINOR AXES ARE EQUAL THE AREA DESCRIBED IS A SQUARE. IF THE AXES ARE NOT EQUAL THE AREA DESCRIBED IS A RECTANGLE.
		CIRCULAR/ELLIPTICAL	2	IF AREA MAJOR AND AREA MINOR AXES ARE EQUAL THE AREA DESCRIBED IS A CIRCLE. IF THE AXES ARE NOT EQUAL THE AREA IS AN ELLIPSE.
		UNDEFINED	3	
376	007	IDENTITY -----		EXPRESSES THE STANDARD IDENTITY OF A TRACK.
		PENDING	0	A TRACK WHICH HAS NOT BEEN SUBJECTED TO THE IDENTIFICATION PROCESS.
		UNKNOWN	1	AN EVALUATED TRACK WHICH HAS NOT BEEN IDENTIFIED.
		ASSUMED FRIEND	2	A TRACK WHICH IS ASSUMED TO BE A FRIEND BECAUSE OF ITS CHARACTERISTICS, BEHAVIOR, OR ORIGIN.

			FIELD CODING FOR J3.7I	(SHEET 7)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
376	007	IDENTITY -----	(CONTINUED)	
		FRIEND	3	A TRACK BELONGING TO A DECLARED FRIENDLY NATION.
		NEUTRAL	4	A TRACK WHOSE CHARACTERISTICS, BEHAVIOR, ORIGIN, OR NATIONALITY INDICATE THAT IT IS NEITHER SUPPORTING NOR OPPOSING FRIENDLY FORCES.
		SUSPECT	5	A TRACK WHICH IS POTENTIALLY HOSTILE BECAUSE OF ITS CHARACTERISTICS, BEHAVIOR, ORIGIN, OR NATIONALITY.
		HOSTILE	6	A TRACK DECLARED TO BELONG TO ANY OPPOSING NATION, PARTY, GROUP, OR ENTITY, WHICH BY VIRTUE OF ITS BEHAVIOR OR INFORMATION COLLECTED ON IT SUCH AS CHARACTERISTICS, ORIGIN OR NATIONALITY CONTRIBUTES TO THE THREAT TO FRIENDLY FORCES.
		UNDEFINED	7	
376	001	IDENTITY AMPLIFYING DESCRIPTOR -----		A DESCRIPTOR ADDING TO THE STANDARD IDENTITY OF A TRACK INVOLVED IN AN EXERCISE. THE STANDARD IDENTITY IS FRIEND.
		EXERCISE PENDING	0	
		EXERCISE UNKNOWN	1	
		EXERCISE ASSUMED FRIEND	2	
		EXERCISE FRIEND	3	
		EXERCISE NEUTRAL	4	
		JOKER	5	
		FAKER	6	
		UNDEFINED	7	

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: ELECTRONIC WARFARE PRODUCT INFORMATION CONTINUATION WORD 1

:	49	48	47	46:	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27:	26	25
:	BEARING				:																			:	
:	ACCURACY				:	TRACK NUMBER, ORIGIN																		:	---
:					:																			:	
:	4				:	19																		:	

:	69	68	67:	66	65	64	63:	62	61	60:	59	58	57	56	55	54	53	52	51	50:	
:	ENV/CAT			:	IDENTITY			:	PLATFORM			:									:
:				:	CONFIDENCE			:	EVALUATION			:	ELEVATION ANGLE								:
:				:				:	CONFIDENCE			:									:
:	3			:	4			:	3			:	10								:

WORD DESCRIPTION

WORD NUMBER: J3.7C1

WORD TITLE: ELECTRONIC WARFARE PRODUCT INFORMATION CONTINUATION WORD 1

REFERENCE			BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS		RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1	2	01
1551 001	CONTINUATION WORD LABEL	2-	6	5	00001
758 007	DISUSED	7-	13	7	
1811 001	BEARING ORIGIN (BNG ORG)	14		1	
372 007	BEARING	15-	26	12	
769 009	TRACK NUMBER, ORIGIN	27-	45	19	
383 006	BEARING ACCURACY (BA)	46-	49	4	
428 002	ELEVATION ANGLE	50-	59	10	
431 004	PLATFORM EVALUATION CONFIDENCE	60-	62	3	
1663 001	IDENTITY CONFIDENCE (ID CON)	63-	66	4	
275 004	ENVIRONMENT/CATEGORY (ENV/CAT)	67-	69	3	

FIELD CODING FOR J3.7C1

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1811	001	BEARING ORIGIN -----		SPECIFIES THE ORIGIN OF THE BEARING.
		TRACK NUMBER ORIGIN	0	THE ORIGIN OF THE BEARING IS FROM THE LOCATION OF THE ORIGIN TN.
		LATITUDE/LONGITUDE	1	THE ORIGIN OF THE BEARING IS FROM THE LOCATION SPECIFIED IN THE LATITUDE AND LONGITUDE FIELDS.
372	007	BEARING -----		BEARING IS REFERENCED TO TRUE NORTH.
		0 THROUGH 359 3736/4096 DEGREES	0 THROUGH 4095	IN 360/4096 DEGREE INCREMENTS.
769	009	TRACK NUMBER, ORIGIN -----		THE TN IDENTIFYING THE LOCATION OF THE REPORTED BEARING'S ORIGIN, E.G., A UNIT'S LOCATION, OTHER TRACK, OR A POINT. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE- BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANNN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.

CODING	CHARACTER
00000	0
00001	1

FIELD CODING FOR J3.7C1

(SHEET 2)

DFI DUI DUI/DI NAME
769 009 TRACK NUMBER, ORIGIN

DI BIT CODE
(CONTINUED)

DUI/DI EXPLANATION

00010 2
00011 3
00100 4
00101 5
00110 6
00111 7
01000 A
01001 B
01010 C
01011 D
01100 E
01101 F
01110 G
01111 H
10000 J
10001 K
10010 L
10011 M
10100 N
10101 P
10110 Q
10111 R
11000 S
11001 T
11010 U
11011 V
11100 W
11101 X
11110 Y
11111 Z

00000
00001-00076

00077
00100-00175

00176

00177
00200-07776

0
1 THROUGH 62

63
64 THROUGH 125

126

127
128 THROUGH 4094

NO STATEMENT.
ASSIGNED AS IDENTIFICATION NUMBERS
FOR C2 IUS (JU, PU, FJU, AND FPU).
ILLEGAL.
ASSIGNED AS IDENTIFICATION NUMBERS
FOR C2 IUS (JU, RU, FJU, AND FRU).
RESERVED FOR USE AS THE PSEUDO
SOURCE TRACK NUMBER ADDRESS.
COLLECTIVE ADDRESS.
ASSIGNED AS IDENTIFICATION NUMBERS
FOR JUS AND ALLOCATED IN BLOCKS TO
C2 IUS TO BE USED FOR TACTICAL
INFORMATION REPORTING, E.G.,

FIELD CODING FOR J3.7C1

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	009	TRACK NUMBER, ORIGIN -----	(CONTINUED)	
		07777	4095	TRACKS AND REFERENCE POINTS.
		0A000-0Z777	4096 THROUGH 16383	ILLEGAL.
				ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		10000-17777	16384 THROUGH 20479	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		20000-27777	32768 THROUGH 36863	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS

5.1-838

MIL-STD-6016B

FIELD CODING FOR J3.7C1

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	009	TRACK NUMBER, ORIGIN -----	(CONTINUED)	
		5A000-5Z777	86016 THROUGH 98303	FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		70000-77776	114688 THROUGH 118782	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		7A000-ZZ777	118784 THROUGH 524287	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
				ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
383	006	BEARING ACCURACY -----		THE BEARING ACCURACY IS STATED AS A NUMERICAL VALUE FROM 1 TO 15 WITH THE HIGHER VALUES INDICATING THE HIGHER ASSET BEARING ACCURACIES. THE ASSET BEARING ACCURACY IS REPRESENTED IN DEGREES OF ACCURACY AT A RANGE OF 300 DATA MILES BETWEEN THE ES RECEIVER AND THE TARGET EMITTER.
		NO STATEMENT	0	
		> 10.0 DEGREES	1	
		<= 10.0 DEGREES	2	
		<= 5.0 DEGREES	3	
		<= 4.0 DEGREES	4	

5.1-839

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
383	006	BEARING ACCURACY -----	(CONTINUED)	
		<= 3.0 DEGREES	5	
		<= 2.0 DEGREES	6	
		<= 1.0 DEGREES	7	
		<= 0.4 DEGREES	8	
		<= 0.2 DEGREES	9	
		<= 0.032 DEGREES	10	
		<= 0.016 DEGREES	11	
		<= 0.008 DEGREES	12	
		<= 0.004 DEGREES	13	
		<= 0.002 DEGREES	14	
		<= 0.001 DEGREES	15	
428	002	ELEVATION ANGLE -----		EXPRESSES ANGULAR ELEVATION MEASURED FROM THE HORIZONTAL. ABOVE HORI- ZONTAL ANGLES ARE POSITIVE. BELOW HORIZONTAL ANGLES ARE NEGATIVE. EXPRESSES ANGULAR ELEVATION IN UNITS OF 1/2048 OF A CIRCLE MEASURED FROM THE HORIZONTAL. ANGULAR ELEVATIONS ABOVE THE HORIZONTAL ARE POSITIVE. ANGULAR ELEVATIONS BELOW THE HORIZONTAL ARE NEGATIVE. BIT CODES ARE IN TWOS COMPLEMENT CODING. 0 THROUGH 511 PI/1024 0 THROUGH 511 RADIANS IN PI/1024 RADIAN INCREMENTS. NO STATEMENT 512 -511 PI/1024 THROUGH 513 THROUGH 1023 -PI/1024 RADIANS IN PI/1024 RADIAN INCREMENTS.
431	004	PLATFORM EVALUATION CONFIDENCE -----		THE PLATFORM EVALUATION CONFIDENCE IS A STATEMENT APPENDED TO A REPORT FOR THE PURPOSE OF INDICAT- ING THE RELATIVE DEGREE OF CONFI- DENCE AN EVALUATOR/OPERATOR HAS IN THE ENVIRONMENT/CATEGORY. THE PLATFORM EVALUATION CONFIDENCE IS ASSIGNED BY AN EVALUATOR/OPERATOR BASED ON INFORMATION OBTAINED FROM LOCAL SENSORS, COMPARISON OF EMITTER(S) CHARACTERISTICS TO INTELLIGENCE FILES, AND/OR INFOR- MATION PROVIDED BY REMOTE SOURCES.

FIELD CODING FOR J3.7C1

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
431	004	PLATFORM EVALUATION CONFIDENCE (CONTINUED)		

		NO STATEMENT	0	
		POSITIVE/CERTAIN	1	
		PROBABLE	2	
		POSSIBLE	3	
		LOW	4	
		UNDEFINED	5 THROUGH 7	
1663	001	IDENTITY CONFIDENCE		

		UNDEFINED	0 THROUGH 15	
275	004	ENVIRONMENT/CATEGORY		IDENTIFIES THE ENVIRONMENT/CATEGORY
		-----		OF A JTIDS/MIDS UNIT OR TRACK.
		NO STATEMENT/UNKNOWN	0	
		SPACE	1	
		AIR	2	
		SURFACE (MARITIME)	3	
		SUBSURFACE (MARITIME)	4	
		LAND (GROUND)	5	
		UNDEFINED	6 THROUGH 7	

.....

WORD TITLE: ELECTRONIC WARFARE PRODUCT INFORMATION CONTINUATION WORD 2

[illegible]

:	69	68	67	66	65	64	63	62	:	61	60	59	58	57	56	:	55	54	53	52	51	50	:
:	AXIS ORIENTATION								:	AREA MINOR AXIS						:	AREA MAJOR AXIS						:
:									:							:							:
:	8								:	6						:	6						:

WORD DESCRIPTION

WORD NUMBER: J3.7C2

WORD TITLE: ELECTRONIC WARFARE PRODUCT INFORMATION CONTINUATION WORD 2

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	00010
281 014	LATITUDE, 0.0051 MINUTE	7-	27 21	
282 014	LONGITUDE, 0.0051 MINUTE	28-	49 22	
419 003	AREA MAJOR AXIS	50-	55 6	
419 004	AREA MINOR AXIS	56-	61 6	
1806 001	AXIS ORIENTATION	62-	69 8	

FIELD CODING FOR J3.7C2

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
281	014	LATITUDE, 0.0051 MINUTE -----		THE PRECISION IS APPROXIMATELY 31 FEET. IN 90/1,048,575 DEGREE INCREMENTS.
		0 DEGREES	0	
		+90/1,048,575 THROUGH +90 DEGREES NORTH	1 THROUGH 1048575	
		NO STATEMENT	1048576	
		-90 THROUGH -90/1,048,575 DEGREES SOUTH	1048577 THROUGH 2097151	
282	014	LONGITUDE, 0.0051 MINUTE -----		THE PRECISION IS APPROXIMATELY 31 FEET. IN 180/2,097,151 DEGREE INCREMENTS.
		0 DEGREES	0	
		+180/2,097,151 THROUGH +180 DEGREES EAST	1 THROUGH 2097151	
		NO STATEMENT	2097152	
		-180 THROUGH -180/2,097,151 DEGREES WEST	2097153 THROUGH 4194303	
419	003	AREA MAJOR AXIS -----		THIS FIELD IS USED IN CONJUNCTION WITH THE SQUARE/CIRCLE SWITCH, AREA MINOR AXIS, AXIS ORIENTATION, LATITUDE AND LONGITUDE TO DESCRIBE THE AREA OF A CIRCLE, ELLIPSE, SQUARE OR RECTANGLE. THE LENGTH EXPRESSED IN THIS FIELD IS DOUBLED AND CENTERED ON THE POSITION DESCRIBED BY THE LATITUDE AND LONGITUDE. IN FOUR DATA MILE INCREMENTS.
		0 THROUGH 244 DATA MILES	0 THROUGH 61	
		248 DATA MILES OR MORE	62	
		NO STATEMENT	63	
419	004	AREA MINOR AXIS -----		THIS FIELD IS USED IN CONJUNCTION WITH THE SQUARE/CIRCLE SWITCH, AREA MAJOR AXIS, AXIS ORIENTATION, LATITUDE AND LONGITUDE TO DESCRIBE THE AREA OF A CIRCLE, ELLIPSE, SQUARE OR RECTANGLE. THE AREA MINOR AXIS IS ALWAYS ORIENTED AT 90 DEGREES TO THE AREA MAJOR AXIS. THE LENGTH EXPRESSED IN THIS FIELD

FIELD CODING FOR J3.7C2 (SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
419	004	AREA MINOR AXIS -----	(CONTINUED)	
		0 THROUGH 244 DATA MILES 248 DATA MILES OR MORE NO STATEMENT	0 THROUGH 61 62 63	IS DOUBLED AND CENTERED ON THE POSITION DESCRIBED BY THE LATITUDE AND LONGITUDE. IN FOUR DATA MILE INCREMENTS.
1806	001	AXIS ORIENTATION -----		
		0 THROUGH 179 DEGREES ILLEGAL NO STATEMENT	0 THROUGH 179 180 THROUGH 254 255	THE AXIS ORIENTATION IS THE OFFSET FROM TRUE NORTH EXPRESSED IN ONE DEGREE INCREMENTS FROM ZERO TO 179 AND IS USED TO ORIENT THE AREA MA- JOR AXIS OF A CIRCLE, ELLIPSE, SQUARE, OR RECTANGLE. IN ONE DEGREE INCREMENTS.

.....

WORD TITLE: ELECTRONIC WARFARE PRODUCT INFORMATION CONTINUATION WORD 3

24	23	22	21	20	19	18	17	16:	15	14	13	12	11	10	09	08	07:	06	05	04	03	02:	01	00:			
SPEED									:	COURSE									:	CONTINUATION WORD					:	WORD	:
									:										:	LABEL					:	FORMAT	:
									:										:						:	2	:
11									:	9									:	5					:	2	:

49	48	47	46	45	44	43:	42	41	40:	39	38	37	36	35	34	33	32	31	30	29	28	27:	26	25
						:	EMITTER		:													:		
<---						:	NUMBER		:	ALTITUDE, 25 FT												:	--->	
						:	INDICATOR		:													:		
						:	3		:													:		
						:			:	13												:		

:	69	68	67:	66	65	64	63:	62	61	60:	59:	58	57	56	55	54	53	52	51	50	
:	SPARE			:	DISUSED			:	EMITTER		:	WTR:									
:				:				:	CONFIDENCE		:	MDE:		EMITTER NUMBER							
:				:				:			:										
:	3			:	4			:	3		:	1 :		16							

WORD DESCRIPTION

WORD NUMBER: J3.7C3

WORD TITLE: ELECTRONIC WARFARE PRODUCT INFORMATION CONTINUATION WORD 3

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	01
1551	001	CONTINUATION WORD LABEL	2-	6 5	00011
	371	015 COURSE	7-	15 9	
	367	018 SPEED	16-	26 11	
	365	033 ALTITUDE, 25 FT	27-	39 13	
	266	001 EMITTER NUMBER INDICATOR	40-	42 3	
	422	001 EMITTER NUMBER	43-	58 16	
1821	001	WARTIME RESERVE MODE INDICATOR	59	1	
		(WTR MDE)			
	431	003 EMITTER CONFIDENCE	60-	62 3	
	758	004 DISUSED	63-	66 4	
	756	003 SPARE	67-	69 3	

FIELD CODING FOR J3.7C3

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
371	015	COURSE ----- 0 THROUGH 359 DEGREES ILLEGAL NO STATEMENT	0 THROUGH 359 360 THROUGH 510 511	INDICATES THE DIRECTION OF TRAVEL OF AN OBJECT IN DEGREES WITH RESPECT TO TRUE NORTH. IN 1 DEGREE INCREMENTS.
367	018	SPEED ----- 0 THROUGH 4092 DATA MILES PER HOUR NO STATEMENT	0 THROUGH 2046 2047	THE RATE OF CHANGE OF POSITION. EXPRESSES GROUND SPEED IN 2 DATA MILES PER HOUR INCREMENTS.
365	033	ALTITUDE, 25 FT ----- 0 THROUGH 204,750 FEET ALTITUDE UNKNOWN	0 THROUGH 8190 8191	EXPRESSES ALTITUDE AS MEASURED OUT- WARD FROM THE EARTH AS A POSITIVE QUANTITY ABOVE MEAN SEA LEVEL (MSL) IN FEET. IN 25 FEET INCREMENTS.
266	001	EMITTER NUMBER INDICATOR ----- DO NOT INTERPRET EMITTER NUMBER FIELD INTERPRET EMITTER NUMBER FIELD AS NATO SPOT NUMBER UNDEFINED	0 1 2 THROUGH 7	EMITTER NUMBER INDICATOR IS USED WITH THE EMITTER NUMBER FIELD TO INDICATE WHICH DATABASE THE EMITTER NUMBER IS ASSOCIATED WITH.
422	001	EMITTER NUMBER ----- ----- FOR EMITTER NUMBER INDICATOR (EN=1) ----- NATO SPOT NUMBER ILLEGAL	000000 THROUGH 037777 (OCTAL) 040000 THROUGH 177777 (OCTAL)	IDENTIFIES A SPECIFIC EMITTER. THE NATO SPOT NUMBER USES 5 OCTAL DIGITS WITH A RANGE OF 0-37777.

5.1-848

MIL-STD-6016B

FIELD CODING FOR J3.7C3

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1821	001	WARTIME RESERVE MODE INDICATOR -----		WARTIME RESERVE MODE INDICATOR IS TO BE USED WITH THE EMITTER NUMBER FIELD TO INDICATE WHICH MODE THE EMITTER IS OPERATING IN.
		NORMAL OPERATIONS	0	INDICATES THE EMITTER IS FUNCTIONING IN ITS NORMAL OPERATING MODE.
		WARTIME RESERVE MODE	1	INDICATES THE EMITTER IS FUNCTIONING IN ITS WARTIME RESERVE MODE. WARTIME RESERVE MODE IS: AN INTENTIONAL CHANGE IN OBSERVABLE ELECTRO-MAGNETIC EMITTER PARAMETER OR OPERATIONAL PROCEDURE INTENDED TO REDUCE THE EFFECTIVENESS OF EW EQUIPMENT OR OTHER DETECTION, CLASSIFICATION, AND SUPPORT ACTIVITIES OF OPPOSING FORCES. THESE MODES ARE DELIBERATELY HELD IN RESERVE FOR WARTIME EMERGENCY USE AND ARE SELDOM, IF EVER, INTERCEPTED OR OBSERVED PRIOR TO THE EMERGENCY. ALSO CALLED WARM.
431	003	EMITTER CONFIDENCE -----		THE CONFIDENCE IS COMPUTED ON THE BASIS OF THE NUMBER OF PARAMETER MATCHES FOR THE FOLLOWING EMITTER PARAMETERS: FREQUENCY, PULSE REPETITION FREQUENCY, PULSE WIDTH, JITTER, SCAN CYCLE/ANTENNA ROTATION PERIOD/SCAN RATE, SCAN TYPE AND POLARIZATION. A PARAMETER MATCH MEANS THAT AN EMITTER PARAMETER HAS BEEN DETECTED, MEASURED, AND COMPARED WITH DATA STORED IN INTELLIGENCE FILES. IT FURTHER IMPLIES THAT NO PARAMETER FOUND IS OUTSIDE THE RANGE SPECIFIED IN THE INTELLIGENCE FILE.
		NO STATEMENT	0	
		VALUE 1	1	LOW CONFIDENCE - LESS THAN 4 PARAMETER MATCHES.
		VALUE 2 THROUGH 5	2 THROUGH 5	THE VALUE IS DETERMINED BY THE FOLLOWING RULES: A. INCREASE ONE VALUE FOR EACH ADDITIONAL PARAMETER MATCH ABOVE

FIELD CODING FOR J3.7C3 (SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

431	003	EMITTER CONFIDENCE	(CONTINUED)	
-----	-----	--------------------	-------------	--

VALUE 6	6
VALUE 7	7

3.
B. INCREASE ONE VALUE FOR AN ES/
NON-ES 'OPERATOR KNOWN'
ASSOCIATION (THE OPERATOR
RECOGNIZES AN ASSOCIATION THAT
MAY OR MAY NOT HAVE BEEN
TRANSMITTED ON THE LINK).
C. INCREASE TWO VALUES FOR EVERY
'OPERATOR KNOWN' EMITTER
ASSOCIATION.
D. THE TOTAL SHALL NOT EXCEED 5.
HIGH CONFIDENCE (OPERATOR
EVALUATION).
POSITIVE CONFIDENCE.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J3.7C4

WORD TITLE: ELECTRONIC WARFARE PRODUCT INFORMATION CONTINUATION WORD 4

24	23	22:	21:	20	19:	18	17	16	15	14	13:	12	11	10	09	08	07:	06	05	04	03	02:	01	00:											
FREQUENCY MULTIPLIER, 1												F/R: IND:		SP		MODE NUMBER										SPACE PLATFORM		CONTINUATION WORD LABEL						WORD FORMAT	
																										AIR PLATFORM									
																										SURFACE (MARITIME) PLATFORM									
																										SUBSURFACE (MARITIME) PLATFORM									
																										LAND (GROUND) PLATFORM									
																										SPARE									
4				1		2		6						6						5						2									
</																																			

WORD DESCRIPTION

WORD NUMBER: J3.7C4

WORD TITLE: ELECTRONIC WARFARE PRODUCT INFORMATION CONTINUATION WORD 4

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	01
1551	001	CONTINUATION WORD LABEL	2-	6 5	00100
1797	005	SPACE PLATFORM	7-	12 6	SEE NOTE 1.
1797	001	AIR PLATFORM	7-	12 6	SEE NOTE 1.
1797	002	SURFACE (MARITIME) PLATFORM	7-	12 6	SEE NOTE 1.
1797	003	SUBSURFACE (MARITIME) PLATFORM	7-	12 6	SEE NOTE 1.
1797	004	LAND (GROUND) PLATFORM	7-	12 6	SEE NOTE 1.
756	006	SPARE	7-	12 6	
430	001	MODE NUMBER	13-	18 6	
756	002	SPARE (SP)	19-	20 2	
1819	001	FREQUENCY/FREQUENCY RANGE INDICATOR (F/R IND)	21	1	
1820	003	FREQUENCY MULTIPLIER, 1 (FRQ ML1)	22-	25 4	
417	006	FREQUENCY, 1 (FRQ1)	26-	45 20	
1820	004	FREQUENCY MULTIPLIER, 2 (FRQ ML2)	46-	49 4	
417	007	FREQUENCY, 2 (FRQ2)	50-	69 20	

J3.7C4 WORD NOTES
NOTE 1 Environment/Category - Platform (Sheet 1 of 5)

PLATFORM	ENVIRONMENT/CATEGORY						
	0	1	2	3	4	5	6-7
	NO STATEMENT/ UNKNOWN	SPACE	AIR	SURFACE (MARITIME)	SUBSURFACE (MARITIME)	LAND (GROUND)	UNDEFINED
0	NO STATEMENT	NO STATEMENT	NO STATEMENT	NO STATEMENT	NO STATEMENT	NO STATEMENT	UNDEFINED
1	ILLEGAL	SATELLITE	FIGHTER	AIRCRAFT CARRIER (CV)	SUBMARINE PROPULSION UNKNOWN	TROOP CONCENTRATION/UNIT	UNDEFINED
2	ILLEGAL	BASE	FIGHTER BOMBER	BATTLESHIP	DIESEL ELECTRIC SUBMARINE GENERAL	HEADQUARTER COMPLEX	UNDEFINED
3	ILLEGAL	WEAPON	ATTACK	CRUISER	DIESEL ELECTRIC ATTACK SUBMARINE	COMMAND/CONTROL COMMAND AND CONTROL CENTER	UNDEFINED
4	ILLEGAL	TRANSPORT	BOMBER	DESTROYER	DIESEL ELECTRIC MISSILE SUBMARINE	ASSEMBLY AREA	UNDEFINED
5	ILLEGAL	PATROL	RECONNAISSANCE	FRIGATE	DIESEL ELECTRIC BALLISTIC MISSILE SUBMARINE	INSTALLATION/FACILITY, MILITARY	UNDEFINED
6	ILLEGAL	SUPPORT	TANKER	FAST PATROL BOAT	TYPE 1 DIESEL	INSTALLATION/FACILITY, CIVILIAN	UNDEFINED
7	ILLEGAL	DEBRIS	TANKER (BOOM ONLY)	AMPHIBIOUS	TYPE 2 DIESEL	AIRFIELD/AIRBASE	UNDEFINED
8	ILLEGAL	DECOY	TANKER (DROGUE ONLY)	LHA/LHD	TYPE 3 DIESEL	PORT/HARBOR FACILITY	UNDEFINED
9	ILLEGAL	UNDEFINED	INTERCEPTOR	AMPHIBIOUS ASSAULT COMMAND SHIP (LCC)	NUCLEAR SUBMARINE GENERAL	STORAGE SITE	UNDEFINED
10	ILLEGAL	UNDEFINED	TRANSPORT	LANDING CRAFT (LC)	NUCLEAR ATTACK SUBMARINE	TACTICAL POSITION	UNDEFINED

5.1-854

MIL-STD-6016B

J3.7C4 WORD NOTES (Continued)
NOTE 1 Environment/Category - Platform (Sheet 2 of 5)

PLATFORM	ENVIRONMENT/CATEGORY						
	0	1	2	3	4	5	6-7
	NO STATEMENT/ UNKNOWN	SPACE	AIR	SURFACE (MARITIME)	SUBSURFACE (MARITIME)	LAND (GROUND)	UNDEFINED
11	ILLEGAL	UNDEFINED	AIRBORNE COMMAND POST (ACP)	TROOP SHIP	NUCLEAR MISSILE SUBMARINE	FORTIFICATION	UNDEFINED
12	ILLEGAL	UNDEFINED	MISSILE CARRIER	TANKER/OILER	NUCLEAR BALLISTIC MISSILE SUBMARINE	INTERSECTION	UNDEFINED
13	ILLEGAL	UNDEFINED	MISSILE	AUXILIARY SHIP	TYPE I NUCLEAR	CONVOY	UNDEFINED
14	ILLEGAL	UNDEFINED	ELECTRONIC WARFARE (EW)	MINE WARFARE SHIP	TYPE II NUCLEAR	COMBAT VEHICLE	UNDEFINED
15	ILLEGAL	UNDEFINED	ANTISUBMARINE WARFARE (ASW)	MINE COUNTERMEASURES MARITIME VESSEL (MCMV)	TYPE III NUCLEAR	COMBAT SUPPORT VEHICLE	UNDEFINED
16	ILLEGAL	UNDEFINED	AIRBORNE EARLY WARNING AND CONTROL (AEW&C)	HOSPITAL SHIP	TYPE IV NUCLEAR	VEHICLE, OTHER	UNDEFINED
17	ILLEGAL	UNDEFINED	MARITIME PATROL AIRCRAFT (MPA)	SURFACED SUBMARINE	TYPE V NUCLEAR	TANK	UNDEFINED
18	ILLEGAL	UNDEFINED	SEARCH AND RESCUE (SAR)	HYDROFOIL	NON-SUBMARINE	TRAIN	UNDEFINED
19	ILLEGAL	UNDEFINED	DRONE	AIR CUSHION VEHICLE	SURFACE VESSEL	REMOTELY PILOTED VEHICLE	UNDEFINED
20	ILLEGAL	UNDEFINED	REMOTELY PILOTED VEHICLE (RPV)	INTELLIGENCE COLLECTOR	TORPEDO	MORTAR	UNDEFINED
21	ILLEGAL	UNDEFINED	FIXED WING GUNSHIP	SURVEY VESSEL	MINE	FIELD ARTILLERY	UNDEFINED
22	ILLEGAL	UNDEFINED	CIVIL, AIRLINER	NON-MILITARY	DECOY	AIR DEFENSE ARTILLERY	UNDEFINED
23	ILLEGAL	UNDEFINED	CIVIL, GENERAL	LANDING PLATFORM	WRECK	ROCKET LAUNCHER	UNDEFINED

5.1-855

MIL-STD-6016B

J3.7C4 WORD NOTES (Continued)
NOTE 1 Environment/Category - Platform (Sheet 3 of 5)

PLATFORM	ENVIRONMENT/CATEGORY						
	0	1	2	3	4	5	6-7
	NO STATEMENT/ UNKNOWN	SPACE	AIR	SURFACE (MARITIME)	SUBSURFACE (MARITIME)	LAND (GROUND)	UNDEFINED
24	ILLEGAL	UNDEFINED	LIGHTER THAN AIR (LTA)	LANDING SHIP	SEABED PIPELINE	MISSILE LAUNCHER	UNDEFINED
25	ILLEGAL	UNDEFINED	GLIDER	COMMAND	FISH/MARINE LIFE	SPECIAL WEAPON	UNDEFINED
26	ILLEGAL	UNDEFINED	DECOY	OCEAN RESEARCH	SWIMMER/FROGMAN	BRIDGE	UNDEFINED
27	ILLEGAL	UNDEFINED	HELICOPTER (HELO)	PATROL	KNUCKLE/WAKE	BUILDING/STRUCTURE	UNDEFINED
28	ILLEGAL	UNDEFINED	ATTACK HELICOPTER	SUPPORT	ATTACK SUBMARINE	POWER FACILITY	UNDEFINED
29	ILLEGAL	UNDEFINED	HELICOPTER GUNSHIP	FISHING VESSEL	CRUISE MISSILE LAUNCHER	RAIL FACILITY	UNDEFINED
30	ILLEGAL	UNDEFINED	ANTISUBMARINE WARFARE HELICOPTER (ASW HELO)	MERCHANT VESSEL	PINNACLE/SEA MOUNTAIN	TERRAIN	UNDEFINED
31	ILLEGAL	SPACE GENERAL	MINE WARFARE HELICOPTER	PATROL CRAFT ESCORT	NON-MILITARY SUBMERSIBLE	NAVAID SITE	UNDEFINED
32	ILLEGAL	UNDEFINED	TRANSPORT HELICOPTER	AMPHIBIOUS GENERAL ASSAULT	UNDEFINED	COMMUNICATION SITE	UNDEFINED
33	ILLEGAL	UNDEFINED	TACTICAL SUPPORT	MISSILE CONTROL UNIT	TYPE VI NUCLEAR	RADAR SITE	UNDEFINED
34	ILLEGAL	UNDEFINED	PATROL	DECOY	TYPE VII NUCLEAR	ANTENNA/EMITTER	UNDEFINED
35	ILLEGAL	UNDEFINED	MISCELLANEOUS FIXED WING	UNDEFINED	CONVENTIONAL (COMMAND AND CONTROL)	BUFFER CENTER	UNDEFINED
36	ILLEGAL	UNDEFINED	MISSILE CONTROL UNIT	UNDEFINED	CONVENTIONAL (AUXILIARY)	ELECTRONIC WARFARE SITE	UNDEFINED

5.1-856

MIL-STD-6016B

J3.7C4 WORD NOTES (Continued)
NOTE 1 Environment/Category - Platform (Sheet 4 of 5)

PLATFORM	ENVIRONMENT/CATEGORY						
	0	1	2	3	4	5	6-7
	NO STATEMENT/ UNKNOWN	SPACE	AIR	SURFACE (MARITIME)	SUBSURFACE (MARITIME)	LAND (GROUND)	UNDEFINED
37	ILLEGAL	UNDEFINED	SURFACE-TO-AIR MISSILE (SAM)	UNDEFINED	NUCLEAR (COMMAND AND CONTROL)	SURVEILLANCE SITE	UNDEFINED
38	ILLEGAL	UNDEFINED	AIR-TO-SURFACE MISSILE (ASM)	UNDEFINED	UNDEFINED	BRIDGING EQUIPMENT	UNDEFINED
39	ILLEGAL	UNDEFINED	SURFACE-TO-SURFACE MISSILE (SSM)	UNDEFINED	UNDEFINED	MINE WARFARE EQUIPMENT	UNDEFINED
40	ILLEGAL	UNDEFINED	LOGISTIC	UNDEFINED	UNDEFINED	SURFACE-TO-AIR MISSILE (SAM) SITE	UNDEFINED
41	ILLEGAL	UNDEFINED	AIR-TO-AIR MISSILE (AAM)	UNDEFINED	UNDEFINED	MARITIME HEADQUARTERS	UNDEFINED
42	ILLEGAL	UNDEFINED	SUBSURFACE-TO-SURFACE MISSILE	UNDEFINED	UNDEFINED	AIR SUPPORT RADAR TEAM (ASRT)	UNDEFINED
43	ILLEGAL	UNDEFINED	SURFACE-TO-SUBSURFACE MISSILE	UNDEFINED	UNDEFINED	DIRECT AIR SUPPORT CENTER (DASC)	UNDEFINED
44	ILLEGAL	UNDEFINED	CRUISE MISSILE	UNDEFINED	UNDEFINED	FORWARD AIR CONTROL PARTY (FACP)	UNDEFINED
45	ILLEGAL	UNDEFINED	BALLISTIC MISSILE	UNDEFINED	UNDEFINED	TACTICAL OPERATIONS CENTER (TOC)	UNDEFINED
46	ILLEGAL	UNDEFINED	AIRBORNE LAND SURVEILLANCE	UNDEFINED	UNDEFINED	TACTICAL DATA SYSTEMS (TDS)	UNDEFINED
47	ILLEGAL	UNDEFINED	AIRBORNE LASER	UNDEFINED	UNDEFINED	DECOY	UNDEFINED

5.1-857

MIL-STD-6016B

J3.7C4 WORD NOTES (Continued)
NOTE 1 Environment/Category - Platform (Sheet 5 of 5)

PLATFORM	ENVIRONMENT/CATEGORY						
	0	1	2	3	4	5	6-7
	NO STATEMENT/ UNKNOWN	SPACE	AIR	SURFACE (MARITIME)	SUBSURFACE (MARITIME)	LAND (GROUND)	UNDEFINED
48	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	TRACKED VEHICLE	UNDEFINED
49	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	MISSILE CONTROL UNIT	THEATER HIGH ALTITUDE AREA DEFENSE (THAAD)	UNDEFINED
50	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	JOINT TACTICAL GROUND STATION (JTAGS)	UNDEFINED
51	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	ARMOR	UNDEFINED
52	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	CAVALRY	UNDEFINED
53	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	ENGINEER	UNDEFINED
54	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	AIRBORNE/SPECIAL OPERATIONS	UNDEFINED
55	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	AVIATION	UNDEFINED
56	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	AIR DEFENSE SITE	UNDEFINED
57	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	BALLISTIC MISSILE DEFENSE SITE	UNDEFINED
58 • • • 61	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
62	ILLEGAL	BALLISTIC MISSILE GENERAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
63	ILLEGAL	RESET TO NO STATEMENT	RESET TO NO STATEMENT	RESET TO NO STATEMENT	RESET TO NO STATEMENT	RESET TO NO STATEMENT	UNDEFINED

5.1-858

MIL-STD-6016B

FIELD CODING FOR J3.7C4

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
430	001	MODE NUMBER -----		A TWO DIGIT NUMERIC INDEX SEQUENTIALY ASSIGNED TO EACH MODE OF A GIVEN EMITTER. A MODE IS A GROUP OF RF PARAMETERS WHICH CHARACTERIZE SEVERAL POSSIBLE OPERATING CONDITIONS OF A GIVEN EMITTER. MODE NUMBERS AMPLIFY THE EMITTER NUMBER FIELD. NOT ALL EMITTERS HAVE MODE NUMBERS.
		NO STATEMENT NUMERIC	0 1 THROUGH 63	
1819	001	FREQUENCY/FREQUENCY RANGE INDICATOR -----		FREQUENCY/FREQUENCY RANGE INDICATOR FIELD IS USED WITH THE FOLLOWING FIELDS TO INDICATE THAT A FREQUENCY OR A FREQUENCY RANGE IS BEING DESCRIBED: FREQUENCY MULTIPLIER, 1; FREQUENCY, 1; FREQUENCY MULTIPLIER, 2; FREQUENCY, 2.
		FREQUENCY	0	THE FREQUENCY, 1 FIELD AND THE FREQUENCY MULTIPLIER, 1 FIELD SHOULD BE INTERPRETED TO DETERMINE THE SINGLE FREQUENCY BEING TRANSMITTED IN THIS MESSAGE. THE FREQUENCY, 2 FIELD AND THE FREQUENCY MULTIPLIER, 2 FIELD SHOULD BE 0SET TO NO STATEMENT AND NOT BE INTERPRETED.
		FREQUENCY RANGE	1	THE FREQUENCY AND FREQUENCY MULTIPLIER FIELDS SHOULD BE INTERPRETED TO DETERMINE THE UPPER AND LOWER LIMITS OF THE FREQUENCY RANGE BEING TRANSMITTED IN THIS MESSAGE.
1820	003	FREQUENCY MULTIPLIER, 1 -----		EXPRESSED AS A POWER OF TEN. THIS FIELD IS USED AS A MULTIPLIER TO DETERMINE THE FREQUENCY, 1.
		NUMERIC NO STATEMENT	0 THROUGH 14 15	
417	006	FREQUENCY, 1 -----		WHEN THE FREQUENCY/FREQUENCY RANGE FIELD IS SET TO ZERO, THIS FIELD IS USED WITH THE FREQUENCY MULTIPLIER, 1 FIELD TO SPECIFY A

5.1-859

MIL-STD-6016B

FIELD CODING FOR J3.7C4 (SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
417	006	FREQUENCY, 1 -----	(CONTINUED)	
		NO STATEMENT NUMERIC	0 1 THROUGH 1048575	SINGLE FREQUENCY BEING DESCRIBED. WHEN THE FREQUENCY/FREQUENCY RANGE FIELD IS SET TO ONE, THIS FIELD IS USED WITH THE FREQUENCY MULTIPLIER, 1 FIELD TO SPECIFY THE LOWER LIMIT OF A FREQUENCY RANGE BEING DESCRIBED. EXPRESSED IN HERTZ. THIS VALUE IS USED WITH THE FREQUENCY MULTIPLIER, 1 FIELD TO SPECIFY MULTIPLES OF THIS FREQUENCY.
1820	004	FREQUENCY MULTIPLIER, 2 -----		EXPRESSED AS A POWER OF TEN. THIS FIELD IS USED AS A MULTIPLIER TO DETERMINE THE FREQUENCY, 2.
		NUMERIC NO STATEMENT	0 THROUGH 14 15	
417	007	FREQUENCY, 2 -----		WHEN THE FREQUENCY/FREQUENCY RANGE FIELD IS SET TO ZERO, THIS FIELD SHOULD BE SET TO NO STATEMENT. WHEN THE FREQUENCY/FREQUENCY RANGE FIELD IS SET TO ONE, THIS FIELD IS USED WITH THE FREQUENCY MULTIPLIER, 2 FIELD TO SPECIFY THE UPPER LIMIT OF A FREQUENCY RANGE BEING DESCRIBED.
		NO STATEMENT NUMERIC	0 1 THROUGH 1048575	EXPRESSED IN HERTZ. THIS VALUE IS USED WITH THE FREQUENCY MULTIPLIER, 2 FIELD TO SPECIFY MULTIPLES OF THIS FREQUENCY.

5.1-860

MIL-STD-6016B

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD NUMBER: J3.7C5

WORD TITLE: ELECTRONIC WARFARE PRODUCT INFORMATION CONTINUATION WORD 5

[illegible]

WORD DESCRIPTION

WORD NUMBER: J3.7C5

WORD TITLE: ELECTRONIC WARFARE PRODUCT INFORMATION CONTINUATION WORD 5

REFERENCE			BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR		POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT		0-	1 2	
1551 001	CONTINUATION WORD LABEL		2-	6 5	
749 002	SPACE SPECIFIC TYPE		7-	18 12	
804 001	AIR SPECIFIC TYPE		7-	18 12	
808 001	SURFACE (MARITIME) SPECIFIC TYPE		7-	18 12	
809 001	SUBSURFACE (MARITIME) SPECIFIC TYPE		7-	18 12	
810 001	LAND (GROUND) SPECIFIC TYPE		7-	18 12	
756 051	SPARE		19-	69 51	

FIELD CODING FOR J3.7C5

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
749	002	SPACE SPECIFIC TYPE -----		THE SPECIFIC TYPE OF A POINT OR TRACK WITH AN ENVIRONMENT/CATEGORY OF SPACE.
		NO STATEMENT	0	
		FROG-7	1	
		HONEST JOHN	2	
		SAKR 80	3	
		SS-21 MOD 2	4	
		SS-21 MOD 3	5	
		HAFT-I	6	
		UNDEFINED	7 THROUGH 78	
		SHORT RANGE (0-65 DM)	79	
		ALACRAN	80	
		CHENG FENG	81	
		CONDOR	82	
		HAFT II	83	
		IRAN-130	84	
		LANCE	85	
		MB/EE-150	86	
		MB/EE-300	87	
		UNDEFINED	88	
		PRITHVI	89	
		SS-1B (SCUD-A)	90	
		SS-1C (SCUD-B)	91	
		SS-21 (SCARAB)	92	
		SS-300	93	
		B-610/CJS-98 (BG510)	94	
		NHK-I	95	
		NHK-II (HYON MU)	96	
		UNDEFINED	97 THROUGH 168	
		SHORT-MEDIUM RANGE (66-200 DM)	169	
		AL-HUSAYN	170	
		UNDEFINED	171	
		HAFT III	172	
		M-9	173	
		M-11	174	
		MB/EE-600	175	
		SCUD-C	176	
		SS-23 (SPIDER)	177	
		AL HUSSEIN	178	
		UNDEFINED	179 THROUGH 242	
		MEDIUM RANGE (201-400 DM)	243	
		AL-ABBAS	244	

FIELD CODING FOR J3.7C5

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
749	002	SPACE SPECIFIC TYPE	(CONTINUED)	

		JERICH0-I	245	
		AL HIJARAN	246	
		SONDA IV	247	
		UNDEFINED	248 THROUGH 330	
		MEDIUM-EXTENDED RANGE	331	
		(401-600 DM)		
		AL-FATAH	332	
		BADR-2000	333	
		CONDOR II	334	
		CSS-1	335	
		MB/EE-1000	336	
		SKY HORSE	337	
		SS-12A (SCALEBOARD A)	338	
		SS-12B (SCALEBOARD B)	339	
		SS1000	340	
		TIEN MA	341	
		UNDEFINED	342 THROUGH 416	
		EXTENDED RANGE (601-800	417	
		DM)		
		ARNISTON	418	
		CAPRICORNIO	419	
		JERICH0 II	420	
		NODONG-1	421	
		SS-N-5 (SERB)	422	
		UNDEFINED	423 THROUGH 496	
		EXTENDED-LONG RANGE	497	
		(801-1000 DM)		
		AGNI	498	
		AL/ABED	499	
		CC-4 (SANDAL)	500	
		CSS-5	501	
		UNDEFINED	502 THROUGH 575	
		LONG RANGE (1001-1350	576	
		DM)		
		CHEVALINE	577	
		CSS-2	578	
		CSS-3	579	
		CSS-4	580	
		CSS-N-3	581	
		M-4 SLBM	582	
		M-5 SLBM	583	
		M-20 SLBM	584	
		MIDGETMAN	585	

5.1-865

MIL-STD-6016B

FIELD CODING FOR J3.7C5

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
749	002	SPACE SPECIFIC TYPE	(CONTINUED)	

		MINUTEMAN I	586	
		MINUTEMAN II	587	
		PEACEKEEPER	588	
		POLARIS A-3	589	
		POSEIDON C-3	590	
		SS-11 (SEGO)	591	
		SS-13 (SAVAGE)	592	
		SS-17 (SPANKER) MOD 1	593	
		SS-17 (SPANKER) MOD 2	594	
		SS-17 (SPANKER) MOD 3	595	
		SS-18 (SATAN) MOD 1	596	
		SS-18 (SATAN) MOD 2	597	
		SS-18 (SATAN) MOD 3	598	
		SS-20 (SABER)	599	
		SS-24 (SCALPEL)	600	
		SS-25 (SICKLE)	601	
		SS-N-6 (SAWFLY)	602	
		SS-N-8	603	
		SS-N-17 (SNIPE)	604	
		SS-N-18 (STINGRAY)	605	
		SS-N-20 (STURGEON)	606	
		SS-N-23 (SKIFF)	607	
		SSBS S-3	608	
		SSBS S-4	609	
		TRIDENT I (C-4)	610	
		TRIDENT II (D-5)	611	
		MODIFIED CSS-5	612	
		SS-19 MOD 3	613	
		UNDEFINED	614	
		NEW SOLID SLBM	615	
		CSS-NX-3	616	
		M4B	617	
		M45	618	
		UNDEFINED	619 THROUGH 786	
		>1350 DM	787	
		ABM-1B (GALOSH)	788	
		ARROW	789	
		ASTER	790	
		CORPS SAM	791	
		ERINT	792	
		HAWK	793	
		PATRIOT	794	
		SA-10 (GRUMBLE)	795	

FIELD CODING FOR J3.7C5

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

749	002	SPACE SPECIFIC TYPE	(CONTINUED)	

		SA-12A (GLADIATOR)	796	
		SA-12B (GIANT)	797	
		SA-N-6 (GRUMBLE)	798	
		SH-08 (GAZELLE)	799	
		STANDARD MISSILE BLOCK	800	
		IVA		
		THAAD	801	
		SM-2 BLOCK IV	802	
		SM-3 LEAP	803	
		UNDEFINED	804 THROUGH 876	
		INTERCEPTOR	877	
		OPERATIONAL COMMANDER	878 THROUGH 941	
		DEFINED 1-64		
		UNDEFINED	942 THROUGH 1022	
		BALLISTIC MISSILE	1023	
		GENERAL		
		UNDEFINED	1024 THROUGH 2046	
		SPACE GENERAL	2047	
		UNDEFINED	2048 THROUGH 4093	
		RESET TO NO STATEMENT	4094	
		UNDEFINED	4095	

804	001	AIR SPECIFIC TYPE		THE SPECIFIC TYPE OF POINT OR TRACK WITH AN ENVIRONMENT/CATEGORY OF AIR.

		NO STATEMENT	0	

		FIGHTER		

		F-4 PHANTOM II	1	
		F-5 TIGER II	2	
		F-8 CRUSADER	3	
		F-14 TOMCAT	4	
		F-15 EAGLE	5	
		F-16 FIGHTING FALCON	6	
		F-101 VOODOO	7	
		F-104 STARFIGHTER	8	
		F-105 THUNDERCHIEF	9	
		F-106 DELTA DART	10	
		F-111 (GENERAL DYNAMICS)	11	
		F/A-18 HORNET	12	

5.1-867

MIL-STD-6016B

FIELD CODING FOR J3.7C5

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		EFA	13	
		F-102	14	
		F-100	15	
		DISUSED	16	
		DISUSED	17	
		COMMANDO	18	
		DISUSED	19	
		DISUSED	20	
		J-35 DRAKEN	21	
		JAGUAR	22	
		SUPER ETENDARD	23	
		DISUSED	24 THROUGH 26	
		F-1 (MITSUBISHI)	27	
		F-35XD DRAKEN	28	
		DISUSED	29	
		HF-24 MARUT (WIND SPIRIT)	30	
		JA37 VIGGEN	31	
		DISUSED	32	
		SF-5 FREEDOM FIGHTER	33	
		IAR-91 ORAO	34	
		AJEET INVINCIBLE	35	
		KFIR C2	36	
		MIRAGE F1	37	
		MIRAGE 3	38	
		MIRAGE 5	39	
		MIRAGE 50	40	
		MIRAGE 2000	41	
		DISUSED	42	
		DISUSED	43	
		ALPHA JET	44	
		KEFIR	45	
		F-6 FARMER	46	
		F-8 FISHBED	47	
		F-9 FANTAN	48	
		F-12 (CHINA)	49	
		SU-7 FITTER	50	
		SU-9 FISHPOT	51	
		SU-11 FLAGON	52	
		SU-15 FLAGON	53	
		SU-17 FITTER	54	
		SU-19 FENCER	55	
		SU-20 FITTER	56	

5.1-868

MIL-STD-6016B

FIELD CODING FOR J3.7C5

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		SU-22 FITTER	57	
		SU-24 FENCER	58	
		SU-25 FROGFOOT	59	
		TU-28 FIDDLER	60	
		TU-128 FIDDLER	61	
		MIG-21 FISHBED	62	
		MIG-23 FLOGGER	63	
		MIG-25 FOXBAT	64	
		MIG-27 FLOGGER	65	
		YAK-28 FIREBAR	66	
		YAK-36 FORGER	67	
		AAF "RAM-J"	68	
		MIG-15 FAGOT	69	
		MIG-17 FRESCO	70	
		MIG-19 FARMER	71	
		SU-27 FLANKER	72	
		MIG-29 FULCRUM	73	
		MIG-31 FOXHOUND	74	
		YAK-38 FORGER-A	75	
		F-22 RAPTOR	76	
		F-84 THUNDERSTREAK	77	
		F-86 SABRE	78	
		F/A2 SEA HARRIER	79	
		IDF CHING-KUO (TAIWAN)	80	
		JAS-39 GRIPPEN	81	
		JIAN JI-7	82	
		JIAN JI-8-2	83	
		JOINT STRIKE FIGHTER	84	
		KFIR C7	85	
		KFIR 2000	86	
		RAFALE	87	
		SU-30	88	
		SU-33 (SU-27K)	89	
		SU-34	90	
		SU-35	91	
		SU-37	92	
		SU-39	93	
		YAK-141 FREESTYLE	94	
		F-5 FRESCO	95	
		F-7 FISHBED	96	
		J-9	97	
		RT33	98	
		CF-188 HORNET	99	

FIELD CODING FOR J3.7C5

(SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		UNDEFINED	100	
		TORNADO F3	101	
		SEA HARRIER	102	
		F-5 NORTHROP	103	
		UNDEFINED	104 THROUGH 254	
		FIGHTER GENERAL	255	

		BOMBERS/ATTACK		

		A-4 SKYHAWK	256	
		A-6 INTRUDER	257	
		A-7 CORSAIR II	258	
		A-10 THUNDERBOLT II	259	
		A-37 DRAGONFLY	260	
		B-1 (ROCKWELL)	261	
		B-52 STRATOFORTRESS	262	
		AC-130 HERCULES	263	
		AV-8 HARRIER	264	
		F/A-18 HORNET	265	
		FB-111 (GENERAL DYNAMICS)	266	
		A-1	267	
		TA-28	268	
		DISUSED	269	
		AC-47	270	
		AC-119	271	
		AC-124	272	
		ALPHA JET	273	
		DISUSED	274 THROUGH 276	
		35XD DRAKEN	277	
		J-1 HAWK	278	
		J-1 JAESTREB	279	
		S-2	280	
		AJ37 VIGGEN	281	
		HA220 SUPER SAETA	282	
		M.B.326 (AERMACCHI)	283	
		M.B.339 (AERMACCHI)	284	
		SF 260 WARRIER	285	
		SK 60 (SAAB)	286	
		BAC 167 STRIKEMASTER	287	
		TORNADO GR-1 (IDS)	288	

FIELD CODING FOR J3.7C5

(SHEET 8)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		IL-28 BEAGLE	289	
		MI-4 BISON	290	
		TU-16 BADGER	291	
		TU-22 BLINDER	292	
		TU-22M BACKFIRE	293	
		TU-95 BEAR	294	
		TU-142 BEAR	295	
		YAK-28 BREWER	296	
		SUPER ENTENDARD	297	
		TU-160 BLACKJACK	298	
		AMX	299	
		FRS1 SEA HARRIER	300	
		FRS2 SEA HARRIER	301	
		FRS51 SEA HARRIER	302	
		F-117 NIGHTHAWK	303	
		G4 SUPER GALEB	304	
		G91Y	305	
		HAWK-2000	306	
		HAWK-100	307	
		HAWK-200	308	
		HAWK-50	309	
		HAWK-60	310	
		IA-58 PUCARA	311	
		IAR-93 ORAO	312	
		IAR-99 SOIM	313	
		JIAN JI-5M	314	
		A-5 FANTAN	315	
		L59 ALBATROS	316	
		B-2 SPIRIT	317	
		B-7 HONGZHA	318	
		1050E	319	
		A3 LEI MING	320	
		HARRIER GR4/7	321	
		TORNADO GR4	322	
		AV-8B HARRIER PLUS	323	
		CF-188 HORNET	324	
		RAFALE	325	
		UNDEFINED	326 THROUGH 510	
		BOMBER/ATTACK GENERAL	511	

FIELD CODING FOR J3.7C5

(SHEET 9)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		PATROL/RECON/ELECTRONIC/ TANKER/GENERAL		

		E-2 HAWKEYE	512	
		E-3 SENTRY (AWACS)	513	
		E-4 NEACP	514	
		EA-3	515	
		EA-6 PROWLER	516	
		EB-57 (DOUGLAS)	517	
		EC-130 HERCULES	518	
		EC-135 (BOEING)	519	
		EF-4 WILD WEASEL	520	
		EF-111 (GENERAL DYNAMICS)	521	
		EP-3 ORION	522	
		KA-3 (DOUGLAS)	523	
		KA-6 (GRUMMAN)	524	
		KC-10 EXTENDER	525	
		KC-130 HERCULES	526	
		KC-135 STRATOTANKER	527	
		O-1 BIRD DOG	528	
		O-2 (CESSNA)	529	
		OV-1 MOHAWK	530	
		OV-10 BRONCO	531	
		P-2 NEPTUNE	532	
		P-3 ORION	533	
		RC-130 HERCULES	534	
		RC-135 (BOEING)	535	
		RF-4 PHANTOM II	536	
		RF-5 (NORTHROP)	537	
		RF-8 CRUSADER	538	
		RF-14 TOMCAT	539	
		RF-104 STARFIGHTER	540	
		RP-3 ORION	541	
		RU-21 UTE	542	
		S-2 TRACKER	543	
		S-3 VIKING	544	
		SR-71 BLACKBIRD	545	
		U-2 (LOCKHEED)	546	
		U-4 AERO COMMANDER	547	
		U-5 H-500 TWIN	548	

FIELD CODING FOR J3.7C5

(SHEET 10)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		U-8 SEMINOLE	549	
		U-10 COURIER	550	
		UC-12 HURON	551	
		U-21 UTE	552	
		US-3 VIKING	553	
		OA-37 DRAGONFLY	554	
		TR-1	555	
		WC-130 HERCULES	556	
		E-1 TRACER	557	
		EB-66	558	
		EC-121	559	
		RA-3	560	
		SEA SCAN	561	
		FALCON 20 GUARDIAN	562	
		BR 1150 ATL1	563	
		RF-35XD DRAKEN	564	
		BN-2 MARITIME DEFENDER	565	
		DISUSED	566	THROUGH 567
		CP-140 AURORA	568	
		HS.748 COASTGUARDER	569	
		HS.801 NIMROD	570	
		DISUSED	571	
		MK.3	572	
		RJ-1 HAWK	573	
		RJ-1 JAESTREB	574	
		SS-2	575	
		PEACE SENTINEL	576	
		KC-97	577	
		AU-24	578	
		AU-23	579	
		U-21	580	
		U-17	581	
		HU-16	582	
		U-9	583	
		U-3	584	
		RU-21	585	
		NKC-135	586	
		RF-101	587	
		RF-111	588	
		RB-57	589	
		RB-66	590	
		RC-121	591	
		BE-12 MAIL	592	

FIELD CODING FOR J3.7C5

(SHEET 11)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		IL-38 MAY	593	
		TU-126 MOSS	594	
		BE-6	595	
		VC-10 (TANKER)	596	
		AN-12 CUB-A (ELINT)	597	
		AN-12 CUB-C (EA)	598	
		AN-12 CUB-D (EA)	599	
		IL-20 COOT-A (ELINT)	600	
		IL-76 MAINSTAY	601	
		E-8 (J STARS)	602	
		TORNADO ECR	603	
		E-6 MERCURY	604	
		EMB-111	605	
		MU-2S	606	
		A40 ALBATROS	607	
		BE42 ALBATROS	608	
		CL215 AMPHIBIAN	609	
		IAI 1125	610	
		IL22 COOT B	611	
		J32 LANSEN	612	
		SH5 HARBIN	613	
		TIER1	614	
		TIER2	615	
		TIER3	616	
		US1 (SHIN)	617	
		C-212 CASA	618	
		CESSNA 550 CITATION II	619	
		CESSNA 560 CITATION V	620	
		CL 215 CANADAIR	621	
		DORNIER 27	622	
		F-27 FOKKER	623	
		NIMROD MRA4	624	
		CP-140A AURORA/ARCTURUS	625	
		RC-135 RIVET JOINT	626	
		ATL 2	627	
		ETENDARD IV P	628	
		ALIZE	629	
		FALCON 50	630	
		MIRAGE IV	631	
		MIRAGE 2000	632	
		BR 1150 GE ATL ASW	633	
		BR 1150 GE ATL SIGINT	634	
		C-130 HERCULES TANKER	635	

FIELD CODING FOR J3.7C5

(SHEET 12)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		ASTOR	636	
		UNDEFINED	637 THROUGH 761	
		TANKER	762	
		RECONNAISSANCE (RECON)	763	
		ELECTRONIC WARFARE (EW)	764	
		ASW	765	
		AEW AND C	766	
		MISCELLANEOUS GENERAL	767	

		TRAINER		

		T-2 BUCKEYE	768	
		T-28 TROJAN	769	
		T-29 (CONVAIR)	770	
		T-34 MENTOR	771	
		T-37 TWEET	772	
		T-38 TALON	773	
		T-39 SABERLINER	774	
		T-41 MESCALERO	775	
		T-42 CONCHISE	776	
		T-43 (BOEING)	777	
		T-44 KING AIR	778	
		TA-4 SKYHAWK	779	
		TA-7 CORSAIR II	780	
		T-33	781	
		ALPHA JET	782	
		B3LA (SAAB)	783	
		C-101 AVIOJET	784	
		G2-A GALEB	785	
		G2-A SEAGULL	786	
		L-29 DELFIN	787	
		L-29 MAYA	788	
		L-39 ALBATROS	789	
		L-70 MILTRAINER	790	
		L-450	791	
		P.55 (PARTENAVIA)	792	
		T-2 (MITSUBISHI)	793	
		CM 170 MAGISTER	794	
		M.B.339 (AERMACCHI)	795	
		T-2 (MITSUBISHI)	796	
		CM AU/ MAGISTER	797	

FIELD CODING FOR J3.7C5

(SHEET 13)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		M.B.339 (AERMACCHI)	798	
		SF-260 (SIAI-MARCHETTI)	799	
		SH 37 VIGGEN	800	
		QH-50 DRAKEN	801	
		SK 37 VIGGEN	802	
		SK 60 (SAAB)	803	
		TB30 EPSILON	804	
		TF-35XD	805	
		TJ-1 HAWK	806	
		TJ-1 JASTRAEB	807	
		TS.11 SPARK	808	
		AW1-2 FAN TRAINER	809	
		DISUSED	810	
		HJT-16 KIRAN	811	
		MBB223 FLAMINGO	812	
		SU-11 MAIDEN	813	
		SU-15	814	
		MIG-15 MIDGET	815	
		MIG-17	816	
		MIG-21 MONGOL	817	
		MIG-23	818	
		MIG-25	819	
		YAK-11 MOOSE	820	
		YAK-18 MAX	821	
		YAK-28 MAESTRO	822	
		TF-104 STARFIGHTER	823	
		T-46A	824	
		EMB-312 TOUCAN	825	
		T-45 GOSHAWK	826	
		T-47	827	
		AS202	828	
		CT114 TUTOR	829	
		G91T (FIAT JET 1)	830	
		K8 (NAMC)	831	
		L70 VINKA	832	
		STRIKEMASTER (BAE)	833	
		T1 JAYHAWK	834	
		T4 (KAWASAKI)	835	
		CT-142 DASH 8	836	
		B-55 BARON	837	
		F-33 BONANZA	838	
		839 PILLAN-TAMIZ	839	
		CT-133 SILVERSTAR	840	

FIELD CODING FOR J3.7C5

(SHEET 14)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		UNDEFINED	841 THROUGH 1022	
		TRAINER GENERAL	1023	

		TRANSPORT/AIRLINER		

		C-1 (GRUMMAN COD)	1024	
		C-2 GREYHOUND	1025	
		C-5 GALAXY	1026	
		C-7 CARIBOU	1027	
		C-9 NIGHTINGALE	1028	
		C-12 HURON	1029	
		C-123 PROVIDER	1030	
		C-130 HERCULES	1031	
		C-135 STRATOLIFTER	1032	
		C-140 JETSTAR	1033	
		C-141 STARLIFTER	1034	
		HC-130 HERCULES	1035	
		VC-6 KING AIR	1036	
		VC-9 SKYTRAIN II	1037	
		VC-11 GULFSTREAM	1038	
		VC-137 (BOEING)	1039	
		707 (BOEING)	1040	
		720 (BOEING)	1041	
		727 (BOEING)	1042	
		737 (BOEING)	1043	
		747 (BOEING)	1044	
		757 (BOEING)	1045	
		767 (BOEING)	1046	
		L-100 HERCULES	1047	
		L-1011 TRI STAR	1048	
		DC-8 (DOUGLAS)	1049	
		DC-9 (DOUGLAS)	1050	
		DC-10 (DOUGLAS)	1051	
		C-119	1052	
		DC-130	1053	
		HC-97	1054	
		C-JM	1055	
		C-54	1056	
		C-97	1057	
		C-118	1058	
		C-119	1059	

FIELD CODING FOR J3.7C5

(SHEET 15)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		C-121	1060	
		C-124	1061	
		C-131	1062	
		C-133	1063	
		VC-47	1064	
		CV-54	1065	
		CV-140	1066	
		ARAVA	1067	
		CONCORDE	1068	
		ISLANDER	1069	
		SKYVAN	1070	
		TRIDENT	1071	
		A300 AIRBUS	1072	
		A310 AIRBUS	1073	
		C-1 (KAWASKI)	1074	
		C-160 TRANSALL	1075	
		C.207 AZOR	1076	
		C-212 AVIOCAR	1077	
		F27 FRIENDSHIPS	1078	
		F28 FELLOWSHIP	1079	
		G222 SAMA	1080	
		AW.660 ARGOSY	1081	
		BAC111 ONE-ELEVEN	1082	
		DHC-5 BUFFALO	1083	
		DHC-7 DASH	1084	
		AN-2 COLT	1085	
		AN-10 CAT	1086	
		AN-12 CUB	1087	
		AN-14 CLOD	1088	
		AN-22 COCK	1089	
		AN-24 COKE	1090	
		AN-26 CURL	1091	
		AN-28 CASK	1092	
		AN-30 CLANK	1093	
		AN-32 CLINE	1094	
		AN-40 (VERY LARGE TURBO-PROP)	1095	
		AN-72 COALER	1096	
		IL-12 COACH	1097	
		IL-18 COOT	1098	
		IL-62 CLASSIC	1099	
		IL-76 CANDID	1100	
		IL-86 CAMBER	1101	

FIELD CODING FOR J3.7C5

(SHEET 16)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		TU-114 CLEAT	1102	
		TU-134 CRUSTY	1103	
		TU-144 CHARGER	1104	
		TU-154 CARELESS	1105	
		YAK-40 CODDLING	1106	
		YAK-42 CLOBBER	1107	
		TU-104	1108	
		YAK-27	1109	
		IL-38	1110	
		DISUSED	1111	
		DO-228 LT (TRANSPORT)	1112	
		DISUSED	1113	
		AN-74	1114	
		AN-124 CONDOR	1115	
		A320 AIRBUS	1116	
		A321 AIRBUS	1117	
		A330 AIRBUS	1118	
		A340 AIRBUS	1119	
		AN-70	1120	
		AN-225 COSSACK	1121	
		BAE-125-600	1122	
		BAE146	1123	
		777 (BOEING)	1124	
		C-17 GLOBEMASTER III	1125	
		C-20 GULFSTREAM 3/4	1126	
		C-21 LEARJET 35	1127	
		C-22	1128	
		C-23 SHERPA/SHORTS 330	1129	
		C-26 METRO 3	1130	
		YS 11 (NAMC)	1131	
		CL-600 CHALLENGER	1132	
		CL-601 CHALLENGER	1133	
		CN-235M (AIRTECH)	1134	
		EMB-120 BRASILLIA ADV	1135	
		EMB-145 AMAZON	1136	
		IL-78 MIDAS	1137	
		MD-11	1138	
		MD-80	1139	
		MD-90	1140	
		PD-808	1141	
		TU-44	1142	
		V-22 OSPREY	1143	
		VC-25	1144	

FIELD CODING FOR J3.7C5

(SHEET 17)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		XC-2	1145	
		1124 (IAI)	1146	
		1900 (BEECH)	1147	
		330 (SHORTS)	1148	
		580 (CONVAIR)	1149	
		ATR42	1150	
		B55 BARON	1151	
		BN2 ISLANDER	1152	
		C46 COMMANDO	1153	
		CARAVELL (SUD)	1154	
		CC109 (CANADAIR)	1155	
		CHALLENGER (CANADAIR)	1156	
		DHC2	1157	
		DHC6 TWIN OTTER	1158	
		DHC8	1159	
		EMB110 BANDEIRANTE	1160	
		EMB121	1161	
		FALCON 200/FALCON 20	1162	
		FALCON 50	1163	
		FALCON 900	1164	
		FH227 FRIENDSHIP	1165	
		FOKKER 100	1166	
		FOKKER 50	1167	
		FOKKER 60	1168	
		FOKKER 70	1169	
		GROB G850	1170	
		GULFSTREAM 1	1171	
		GULFSTREAM 2	1172	
		JETSTREAM	1173	
		JETSTREAM 31	1174	
		KING AIR	1175	
		L410 TURBOJET	1176	
		LEARJET 23	1177	
		LEARJET 24	1178	
		LEARJET 25 (IMPROVED VER	1179	
		28)		
		LEARJET 35/36	1180	
		LEARJET 55 (IMPROVED VER	1181	
		28)		
		LEARJET 60	1182	
		MERLIN 2	1183	
		MERLIN 3	1184	
		MERLIN 4	1185	

FIELD CODING FOR J3.7C5

(SHEET 18)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		METRO 3	1186	
		SAAB 2000	1187	
		SAAB 340	1188	
		SABRELINER	1189	
		U6 BEAVER	1190	
		VISCOUNT	1191	
		W3 SOKOL	1192	
		Y11 (HAMC)	1193	
		Y12 (HAMC)	1194	
		Y5	1195	
		CC-115 BUFFALO	1196	
		CC-130 HERCULES	1197	
		CC-150 POLARIS	1198	
		C-235 CASA	1199	
		CC-138 TWIN OTTER	1200	
		DO-228 LM (POLLUTION	1201	
		CONTROL)		
		UNDEFINED	1202 THROUGH 1277	
		LIGHT CIVIL	1278	
		TRANSPORT/AIRLINER	1279	
		GENERAL		

		HELICOPTERS		

		AH-1 COBRA	1280	
		AH-64 APACHE	1281	
		CH-3 (SIKORSKY)	1282	
		CH-46 (SEA KNIGHT)	1283	
		CH-47 CHINOOK	1284	
		CH-53 SEA STALLION	1285	
		CH-54 LARKE (SKYCRANE)	1286	
		EH-60 QUICK FOX	1287	
		HH-1 IROQUOIS	1288	
		HH-2 SEA SPRITE	1289	
		HH-3 JOLLY GREEN	1290	
		HH-52 (SIKORSKY)	1291	
		HH-53 (SIKORSKY)	1292	
		OH-6 (HUGHES)	1293	
		OH-58 KIOWA	1294	
		RH-3 SEA KING	1295	
		RH-53 (SIKORSKY)	1296	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		SH-2 SEA SPRITE	1297	
		SH-3 SEA KING	1298	
		SH-60 SEA HAWK	1299	
		UH-1 IROQUOIS	1300	
		UH-2 SEA SPRITE	1301	
		UH-12 (HILLER)	1302	
		UH-46 (BOEING)	1303	
		UH-60 BLACK HAWK	1304	
		CH-2U	1305	
		HH-43	1306	
		A109 (AGUSTA)	1307	
		A129 MONGOOSE	1308	
		BO-105 (MBB)	1309	
		DISUSED	1310	
		CH-124 SEA KING	1311	
		DISUSED	1312	THROUGH 1314
		SA 315 LAMA	1315	
		DISUSED	1316	
		DISUSED	1317	
		SA 321 SUPER FRELON	1318	
		SA 330 PUMA	1319	
		SA 332 SUPER PUMA	1320	
		S 342 GAZELLE	1321	
		SA 350 ASTAR	1322	
		SA 360 DAUPHIN	1323	
		SA 361 DAUPHIN	1324	
		WG-13 LYNX	1325	
		WG-34 (WESTLAND)	1326	
		KA-18 HOG	1327	
		KA-20 HARP	1328	
		KA-25 HORMONE	1329	
		KA-26 HOODLUM	1330	
		MI-1 HARE	1331	
		MI-2 HOPLITE	1332	
		MI-4 HOUND	1333	
		MI-6 HOOK	1334	
		MI-8 HIP	1335	
		MI-10 HARKE	1336	
		MI-12 HOMER	1337	
		MI-14 HAZE	1338	
		MI-24 HIND	1339	
		MI-26 HALO	1340	
		CH-53E SUPER STALLION	1341	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		MH-53E SEA DRAGON	1342	
		HH-60 NIGHT HAWK	1343	
		HH-65A DOLPHIN	1344	
		KA-27 HELIX-A (ASW)	1345	
		KA-32 HELIX	1346	
		MI-17 HIP-H	1347	
		MI-28 HAVOC	1348	
		ECUREUIL/FENNEL/ESQILO	1349	
		KA-29 HELIX-B	1350	
		KA-50 HOKUM	1351	
		204 BELL	1352	
		205 BELL	1353	
		206 BELL	1354	
		214 BELL	1355	
		280 ENSTROM	1356	
		300 SCHWEIZER	1357	
		406 COMBAT SCOUT	1358	
		A 109 HIRUNDO	1359	
		A 129 MANGUSTA	1360	
		AH 6 CAYUSE	1361	
		ALOUETTE 2	1362	
		ALOUETTE 3	1363	
		AS 350 ECUREUIL	1364	
		AS 532 COUGAR	1365	
		AS 550 FENNEC	1366	
		AS 555 FENNEC	1367	
		AS 565 PANTHER	1368	
		CH 34 WESTLAND	1369	
		EH 101	1370	
		HAS 1 WASP	1371	
		KA-28 HELIX A	1372	
		MD 500 DEFENDER	1373	
		MI 22	1374	
		MI 25	1375	
		MI 35	1376	
		MI 9	1377	
		SA 341 GAZELLE	1378	
		SA 342 GAZELLE	1379	
		SA 365 DAUPHIN 2	1380	
		TS11 ISKRA	1381	
		WESSEX	1382	
		Z9 (HARBIN)	1383	
		CH-146 GRIFFON	1384	

FIELD CODING FOR J3.7C5

(SHEET 21)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		SEA KING AEW (SKW)	1385	
		EH 101 MERLIN	1386	
		AB-212 AUGUSTA BELL	1387	
		BO-105 BOLKOW	1388	
		CH-47 CHINOOK	1389	
		HUGHES 500	1390	
		HUGHES 3000	1391	
		SH-3D SIKORSKY	1392	
		SH-70L SIKORSKY	1393	
		CH-113 LABRADOR	1394	
		NH 90 (C2)	1395	
		NH 90 (RECCE)	1396	
		NH 90 (EW/SEAD)	1397	
		NH 90 (TRANSPORT)	1398	
		SEA LYNX MK88A	1399	
		SEA KING MK41 (KWS)	1400	
		TIGER (HAP)	1401	
		NH 90 (NAVY)	1402	
		TIGER (HAC)	1403	
		SA 341 GAZELLE CANON	1404	
		AS 532 COUGAR HORIZON	1405	
		AW-520 SAR CORMORANT	1406	
		UNDEFINED	1407 THROUGH 1534	
		HELICOPTER GENERAL	1535	

		AIR-AIR MISSILES		

		AIM-4A FALCON	1536	
		AIM-7 SPARROW	1537	
		AIM-9 SIDEWINDER	1538	
		AIM-54 PHOENIX	1539	
		AIM-2A GENIE	1540	
		AIM-120 AMRAAM	1541	
		ASLAM	1542	
		R.530	1543	
		R.550 MAGIC	1544	
		S.530 SUPER 530	1545	
		ASPIDER	1546	
		DISUSED	1547	
		SHAFRIR	1548	
		SKY FLASH	1549	

FIELD CODING FOR J3.7C5

(SHEET 22)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		DISUSED	1550	
		AA-2 ATOLL	1551	
		AA-3 ANAB	1552	
		AA-5 ASH	1553	
		AA-6 ACRID	1554	
		AA-7 APEX	1555	
		AA-8 APHID	1556	
		AAM	1557	
		AA-9 AMOS	1558	
		AA-XP-1/2	1559	
		AQM-34	1560	
		AQM-91	1561	
		BGM-34 FIREBEE/MQM34	1562	
		YQM-94	1563	
		YQM-98	1564	
		AIM-132 ASRAAM	1565	
		MICA	1566	
		PL-2A	1567	
		PL-5B	1568	
		PL-7	1569	
		PL-9	1570	
		PYTHON 3	1571	
		PYTHON 4	1572	
		AA-10 ALAMO	1573	
		AA-11 ARCHER	1574	
		AA-12 ADDER	1575	
		AA-1 ALKALI	1576	
		AAM-1	1577	
		UNDEFINED	1578 THROUGH 1790	
		AIR-TO-AIR MISSILE	1791	
		GENERAL		

		AIR-GROUND/GROUND-		
		GROUND MISSILES		

		AGM-45 SHRIKE	1792	
		AGM-65 MAVERICK	1793	
		AGM-69 SRAM	1794	
		AGM-78 STANDARD ARM	1795	
		AGM-84 HARPOON	1796	
		AGM-86 ALCM	1797	

5.1-885

MIL-STD-6016B

FIELD CODING FOR J3.7C5

(SHEET 23)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		AGM-88 HARM	1798	
		AGM-109 TOMAHAWK	1799	
		AM 39 EXOCET	1800	
		AGM-119 PENGUIN	1801	
		AS 11 KILTER	1802	
		AS 12 KEGLER	1803	
		AS 15 KENT	1804	
		AS 30	1805	
		DISUSED	1806	
		RB 05	1807	
		RB 08	1808	
		ADVANCED ASM	1809	
		AS-1 KENNEL	1810	
		AS-2 KIPPER	1811	
		AS-3 KANGAROO	1812	
		AS-4 KITCHEN	1813	
		AS-5 KELT	1814	
		AS-6 KINGFISH	1815	
		AS-7 KERRY	1816	
		DISUSED	1817	
		AS-10 KAREN	1818	
		AS-9 KYLE	1819	
		AS 34 KORMORAN	1820	
		ASM GABRIEL	1821	
		ASM SEA SKUA	1822	
		ASM SEA EAGLE	1823	
		ASMP	1824	
		AT-2 SWATTER	1825	
		AT-3 SAGGER	1826	
		AT-6 SPIRAL	1827	
		C-601	1828	
		C-611	1829	
		C-801	1830	
		C-802	1831	
		CSS-2	1832	
		CSS-3	1833	
		CSS-N-3	1834	
		CSS-X-4	1835	
		FL-2 SILKWORM	1836	
		FL-7	1837	
		HY-2	1838	
		HY-3	1839	
		M-9/11	1840	

FIELD CODING FOR J3.7C5

(SHEET 24)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		WS-1	1841	
		AS-13 KINGBOLT	1842	
		AS-14 KEDGE	1843	
		AS-16 KICKBACK	1844	
		AS-17 KRYPTON	1845	
		AS-18 KAZOO	1846	
		AT-4 SPIGOT	1847	
		AT-5 SPANDREL	1848	
		AT-7 SAXHORN	1849	
		AT-10 STABBER	1850	
		AT-11 SNIPER	1851	
		AT-12	1852	
		AT-13	1853	
		AT-14	1854	
		FROG-7	1855	
		SS-1 SCUD	1856	
		SS-11 SEGO	1857	
		SS-13 SAVAGE	1858	
		SS-18 SATAN	1859	
		SS-19 STILETTO	1860	
		SS-24 SCALPEL	1861	
		SS-25 SICKLE	1862	
		SS-N-2 STYX	1863	
		SS-N-3 SHADDOCK	1864	
		SS-N-6 SERB	1865	
		SS-N-7 STARBRIGHT	1866	
		SS-N-8 SAWFLY	1867	
		SS-N-9 SIREN	1868	
		SS-N-12 SANDBOX	1869	
		SS-N-18 STINGRAY	1870	
		SS-N-19 SHIPWRECK	1871	
		SS-N-20 STURGEON	1872	
		SS-N-21 SAMPSON	1873	
		SS-N-22 SUNBURN	1874	
		SS-N-23 SKIFF	1875	
		SS-N-26	1876	
		AGNI	1877	
		PRITHVI	1878	
		TOW	1879	
		AGM-114 HELLFIRE	1880	
		MLRS	1881	
		HOT	1882	
		MILAN	1883	

FIELD CODING FOR J3.7C5

(SHEET 25)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		TRIGAT	1884	
		OTOMAT	1885	
		RBS-15M	1886	
		ARMAT	1887	
		ALARM	1888	
		AGM-12 BULLPUP	1889	
		AGM-62A WALLEYE	1890	
		AGM-123A SKIPPER II	1891	
		APACHE (ASM)	1892	
		AS 8	1893	
		AT-1 SWATTER	1894	
		CAS1	1895	
		KH-41 MOSKIT	1896	
		MARTIN PESCADOR	1897	
		MAS1 CARCARA	1898	
		RB 04E	1899	
		STAR	1900	
		SEA INDIGO	1901	
		MM 38	1902	
		MM 40	1903	
		SM 39	1904	
		AS 34 KORMORAN II	1905	
		UNDEFINED	1906 THROUGH 2046	
		AIR-GROUND MISSILE	2047	
		GENERAL		

		SURFACE TO AIR MISSILES		

		FIM-92 STINGER	2048	
		NIM-23 HAWK	2049	
		MIM-42 REDEYE	2050	
		MIM-72 CHAPARRAL	2051	
		MIM-104 PATRIOT	2052	
		RIM-2 TERRIER	2053	
		RIM-7 SEA SPARROW	2054	
		RIM-8 TALOS	2055	
		RIM-24 TARTAR	2056	
		RIM-66 STANDARD MISSILE	2057	
		RIM-67 STANDARD MISSILE	2058	
		BLOWPIPE	2059	
		DISUSED	2060 THROUGH 2061	

5.1-888

MIL-STD-6016B

FIELD CODING FOR J3.7C5

(SHEET 26)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		SEA DART	2062	
		DISUSED	2063	
		SEA WOLF	2064	
		S 440 CROTALE EDIR	2065	
		RAPIER	2066	
		RBS-70 (SLM)	2067	
		DISUSED	2068	
		SAM ROLAND	2069	
		SA-2 GUIDELINE	2070	
		SA-3 GOA	2071	
		SA-4 GANEF	2072	
		SA-N-3 GOBLET	2073	
		SA-5 GAMMON	2074	
		SA-N-4 GECKO	2075	
		SA-6 GAINFUL	2076	
		SA-N-6 GRUMBLE	2077	
		SA-7 GRAIL	2078	
		SA-8 GECKO	2079	
		SA-9 GASKIN	2080	
		SA-10 GRUMBLE	2081	
		SA-11 GADFLY	2082	
		SA-12	2083	
		SA-13 GOPHER	2084	
		MISTRAL	2085	
		SA-N-7 GADFLY	2086	
		SA-N-8 GREMLIN	2087	
		SA-14 GREMLIN	2088	
		SA-16 GIMLET	2089	
		SA-X-17	2090	
		SA-N-5 GRAIL	2091	
		SA-N-11 GRISOM	2092	
		SA-12A GLADIATOR	2093	
		SA-12B GIANT	2094	
		SA-14 GREMLIN	2095	
		SA-15 GAUNTLET	2096	
		SA-17 GRIZZLY	2097	
		SA-N-12 GRIZZLY	2098	
		SA-18 GROUSE	2099	
		SA-19 GRISOM	2100	
		RIM-116 RAM	2101	
		ADATS	2102	
		JAVELIN	2103	
		STARBURST	2104	

FIELD CODING FOR J3.7C5

(SHEET 27)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		STARSTREAK	2105	
		ASPIDE	2106	
		I-HAWK	2107	
		ROLAND II	2108	
		SM-2 BLOCK II	2109	
		SM-2 BLOCK III	2110	
		SM-2 BLOCK IIIA	2111	
		SM-2 BLOCK IIIB	2112	
		SM-2 BLOCK IV	2113	
		SM-2 BLOCK IVA	2114	
		SM-3 LEAP	2115	
		AKASH	2116	
		ANZA	2117	
		ANZA II	2118	
		CSA-1	2119	
		CSA-2	2120	
		CSA-4	2121	
		CSA-5	2122	
		FM-80	2123	
		HN-5	2124	
		NK-7	2125	
		NK-16	2126	
		PANTZYR	2127	
		RAPIER 2000/JERNAS	2128	
		RBS-90	2129	
		SAKR	2130	
		SAVA	2131	
		SHANINE	2132	
		SKYGUARD ASPIDE	2133	
		SPADA	2134	
		TAM SAM	2135	
		TIGERCAT	2136	
		VANGUARD	2137	
		SA-N-1 GOA	2138	
		SA-N-9 GAUNTLET	2139	
		SA-N-10	2140	
		ALBATROS/ASPIDE	2141	
		SM-1	2142	
		VT1 CROTALE	2143	
		MASURCA	2144	
		ASTER 15	2145	
		ASTER 30	2146	
		UNDEFINED	2147 THROUGH 4093	

FIELD CODING FOR J3.7C5

(SHEET 28)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE -----	(CONTINUED)	
		RESET TO NO STATEMENT	4094	
		SURFACE-TO-AIR MISSILE GENERAL	4095	
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----		THE SPECIFIC TYPE OF POINT OR TRACK WITH AN ENVIRONMENT/CATEGORY OF SURFACE (MARITIME).
		NO STATEMENT	0	
		CV GENERAL	1	
		CLEMENCEAU	2	
		ENTERPRISE	3	
		FORRESTAL	4	
		JOHN F KENNEDY	5	
		KITTY HAWK	6	
		MIDWAY	7	
		NIMITZ	8	
		CHARLES DE GAULLE	9	
		UNDEFINED	10 THROUGH 21	
		CVS GENERAL	22	
		DEDALO	23	
		MINAS GERAIS	24	
		VIKRANT	25	
		VEINTICINCO DE MAYO	26	
		VIRAAT	27	
		UNDEFINED	28 THROUGH 35	
		CVH GENERAL	36	
		GIUSEPPE GARIBALDI	37	
		INVINCIBLE	38	
		JEANNE D'ARC	39	
		KIEV	40	
		PRINCIPE DE ASTURIAS	41	
		UNDEFINED	42	
		KIEV (MODIFIED)	43	
		UNDEFINED	44 THROUGH 52	
		BB GENERAL	53	
		IOWA	54	
		UNDEFINED	55 THROUGH 64	
		CC GENERAL	65	
		SVERDLOV (MODIFIED)	66	
		UNDEFINED	67 THROUGH 76	
		CG GENERAL	77	
		ANDREA DORIA	78	
		BAINBRIDGE	79	

FIELD CODING FOR J3.7C5

(SHEET 29)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		BELKNAP	80	
		CALIFORNIA	81	
		UNDEFINED	82	
		KARA	83	
		KIROV	84	
		KRESTA I	85	
		KRESTA II	86	
		KYNDA	87	
		LEAHY	88	
		LONG BEACH	89	
		SLAVA	90	
		TICONDEROGA	91	
		TRUXTUN	92	
		VIRGINIA	93	
		VITTORIO VENETO	94	
		UNDEFINED	95 THROUGH 118	
		CH GENERAL	119	
		MOSKVA	120	
		UNDEFINED	121 THROUGH 130	
		CA GENERAL	131	
		UNDEFINED	132	
		SVERDLOV	133	
		UNDEFINED	134 THROUGH 143	
		DD GENERAL	144	
		AKIZUKI	145	
		ALLEN M SUMNER	146	
		ALLEN M SUMNER FRAM II	147	
		ALMIRANTE	148	
		AMATSUKAZE	149	
		ANIMOSO	150	
		ANSHAN	151	
		ARLEIGH BURKE	152	
		ASAGARI	153	
		UNDEFINED	154	
		AUDACE	155	
		AYANAMI	156	
		DISUSED	157	
		CARPENTER FRAM I	158	
		CHARLES F ADAMS (MOD)	159	
		CHARLES F ADAMS	160	
		COONTZ	161	
		DISUSED	162 THROUGH 163	

FIELD CODING FOR J3.7C5

(SHEET 30)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		UNDEFINED	164	
		FLETCHER	165	
		FORREST SHERMAN (MOD) & HULL	166	
		FRIESLAND	167	
		GEARING FRAM I	168	
		GEARING FRAM II	169	
		UNDEFINED	170	
		DISUSED	171	
		HARUNA	172	
		HATAKAZE	173	
		HATSUYUKI	174	
		IMPAVIDO	175	
		KANIN	176	
		KASHIN (MODIFIED)	177	
		KASHIN	178	
		KASHIN II	179	
		KIDD	180	
		UNDEFINED	181	
		KILDIN (MODIFIED)	182	
		KOTLIN	183	
		KOTLIN (MODIFIED)	184	
		LUDA (TYPE 051)	185	
		MEKO 360	186	
		MINEGUMO	187	
		PROJECT 15	188	
		ROBERT H SMITH	189	
		ROGER D LAURIA	190	
		SAM KOTLIN	191	
		SHIRANE	192	
		SKORY	193	
		SOVREMENYY	194	
		SPRUANCE	195	
		SUFFREN	196	
		TACHIKAZE	197	
		TAKATSUKI	198	
		TYPE 42	199	
		DISUSED	200	
		DISUSED	201	
		TYPE F-70 (AAW)	202	
		TYPE F-70 (ASW)	203	
		TYPE F-67	204	

FIELD CODING FOR J3.7C5

(SHEET 31)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		UNDEFINED	205 THROUGH 206	
		TYPE T-53 (MODIFIED-ASW)	207	
		UNDEFINED	208	
		UDALOY	209	
		YAMAGUMO	210	
		Z	211	
		IROQUOIS	212	
		UNDEFINED	213 THROUGH 276	
		DE GENERAL	277	
		UNDEFINED	278	
		CASTLE	279	
		UNDEFINED	280 THROUGH 295	
		FF GENERAL	296	
		ALMIRANTE CLEMENTE	297	
		ALMIRANTE PEREIRA DA SILVA	298	
		ALPINO	299	
		DISUSED	300 THROUGH 301	
		BALEARES	302	
		BAPTISTA DE ANDRADE	303	
		UNDEFINED	304	
		BERK	305	
		BLACK SWAN	306	
		BROADSWORD (TYPE 22)	307	
		BRONSTEIN	308	
		BROOKE	309	
		CANNON	310	
		CHARLES LAWRENCE	311	
		CHENGDU	312	
		CHIKUGO	313	
		COMANDANTE JOAO BELO	314	
		UNDEFINED	315	
		CROSLEY	316	
		DEALEY	317	
		DESCUBIERTA	318	
		DUKE (TYPE 23)	319	
		DURANGO	320	
		EDSALL	321	
		GARCIA	322	
		GLOVER	323	
		GODAVARI	324	
		GRISHA I	325	

FIELD CODING FOR J3.7C5

(SHEET 32)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		GRISHA II	326	
		GRISHA III	327	
		UNDEFINED	328	
		GRISHA V	329	
		UNDEFINED	330	
		HVIDBJORNEN	331	
		ISHKARI	332	
		ISUZU	333	
		JACOB VAN HEEMSKERCK	334	
		JIANGDONG (TYPE 053J)	335	
		JIANGHU (TYPE 053H)	336	
		JIANGNAN	337	
		JOAO COUTINHO	338	
		KAREL DOORMAN	339	
		KNOX	340	
		DISUSED	341	
		KONI	342	
		KORTENAER	343	
		KRIVAK I	344	
		KRIVAK II	345	
		KRIVAK III	346	
		LA FAYETTE	347	
		DISUSED	348	
		LEOPARD	349	
		LUPU	350	
		M	351	
		DISUSED	352	
		MAESTRALE	353	
		MEKO 140 TYPE	354	
		MEKO 200 TYPE	355	
		MIRKA I	356	
		MIRKA II	357	
		NIELS JUEL	358	
		NITEROI	359	
		OLIVER HAZARD PERRY	360	
		OSLO	361	
		PEDER SKRAM	362	
		PETYA I (MODIFIED)	363	
		PETYA I	364	
		PETYA II (MODIFIED)	365	
		PETYA II	366	
		PETYA III	367	

FIELD CODING FOR J3.7C5

(SHEET 33)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		UNDEFINED	368	
		DISUSED	369	
		RIGA	370	
		RIVER	371	
		BRANDENBURG (TYPE 123)	372	
		RUDDEROW	373	
		SACHSEN (TYPE 124)	374	
		SAVAGE	375	
		DISUSED	376	
		TROMP	377	
		TYPE A 69	378	
		TYPE F-2000S	379	
		UNDEFINED	380 THROUGH 381	
		YUBARI	382	
		BREMEN (TYPE 122)	383	
		CLAUDE JONES	384	
		FFG 7	385	
		HALIFAX	386	
		NAJIN	387	
		PRESIDENT	388	
		SANTA MARIA	389	
		VOSPER MK 5	390	
		VOSPERTHORNYCROFT MK 7	391	
		WIELINGEN	392	
		FLOREAL	393	
		COMMANDANT BORY	394	
		UNDEFINED	395 THROUGH 478	
		FS GENERAL	479	
		ALBATROS	480	
		AUK CLASS	481	
		DE CRISTOFARO	482	
		DISUSED	483	
		MINERVA	484	
		NANUCHKA I	485	
		NANUCHKA II	486	
		NANUCHKA III	487	
		DISUSED	488	
		PF-103	489	
		SAAR 5	490	
		SLEIPNER	491	
		TARANTUL I	492	
		TARANTUL II	493	

FIELD CODING FOR J3.7C5

(SHEET 34)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		DISUSED	494	
		WADI	495	
		UNDEFINED	496 THROUGH 517	
		LL GENERAL	518	
		UNDEFINED	519 THROUGH 528	
		LCC GENERAL	529	
		BLUE RIDGE	530	
		CAVEZZALE	531	
		UNDEFINED	532 THROUGH 540	
		LKA GENERAL	541	
		CHARLESTON	542	
		UNDEFINED	543 THROUGH 552	
		LFS GENERAL	553	
		UNDEFINED	554 THROUGH 563	
		LHA GENERAL	564	
		TARAWA	565	
		UNDEFINED	566 THROUGH 575	
		LHD GENERAL	576	
		WASP	577	
		UNDEFINED	578 THROUGH 587	
		LPA GENERAL	588	
		UNDEFINED	589 THROUGH 598	
		LPD GENERAL	599	
		AUSTIN	600	
		FEARLESS	601	
		IVAN ROGOV	602	
		UNDEFINED	603	
		RALEIGH	604	
		SAN GIORGIO	605	
		UNDEFINED	606 THROUGH 615	
		LPH GENERAL	616	
		IWO JIMA	617	
		UNDEFINED	618 THROUGH 627	
		LSD GENERAL	628	
		ANCHORAGE	629	
		ASHLAND	630	
		CABILDO	631	
		OURAGAN	632	
		FOUDRE	633	
		THOMASTON	634	
		WHIDBEY ISLAND	635	
		UNDEFINED	636 THROUGH 646	

FIELD CODING FOR J3.7C5

(SHEET 35)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		LSL GENERAL	647	
		SIR GERAINT	648	
		UNDEFINED	649 THROUGH 657	
		LSM GENERAL	658	
		ASHDOD	659	
		BATRAL	660	
		CAKABEY	661	
		EDIC I	662	
		EDIC II	663	
		LSM-1	664	
		MP-4	665	
		POLNOCHNY	666	
		POLOCHNY A	667	
		POLOCHNY B	668	
		POLOCHNY C	669	
		POLOCHNY D	670	
		YUDAO	671	
		YULIMG	672	
		BOUGAINVILLE	673	
		UNDEFINED	674 THROUGH 687	
		LST GENERAL	688	
		ALLIGATOR	689	
		ATSUMI	690	
		UNDEFINED	691	
		BROOKE MARINE 93M	692	
		CAKABEY NL-122	693	
		CNIM PS 700	694	
		DE SOTO COUNTY	695	
		DISUSED	696	
		HENGAM	697	
		LST 1-510	698	
		LST 511-1152	699	
		MIURA	700	
		NEWPORT	701	
		ROPUCHA	702	
		SARUCABEY	703	
		CNGF	704	
		OCEAN	705	
		ALBION	706	
		TERREBONNE PARISH	707	
		TOBRUK	708	
		UNDEFINED	709	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		YUKAN	710	
		UNDEFINED	711 THROUGH 730	
		LSV GENERAL	731	
		UNDEFINED	732 THROUGH 741	
		LC GENERAL	742	
		UNDEFINED	743 THROUGH 751	
		LCM GENERAL	752	
		CTM 1	753	
		HUNGNAM	754	
		LCM 1057/1058	755	
		LCM 6	756	
		LCM 8	757	
		T-4	758	
		TSAPLYA	759	
		LCM (TYPE 521)	760	
		UNDEFINED	761 THROUGH 772	
		LCP GENERAL	773	
		DISUSED	774	
		LCM 1031	775	
		LCM 1035/1036	776	
		LCM 1055/1056	777	
		NAMPO	778	
		UNDEFINED	779 THROUGH 788	
		LCPL GENERAL	789	
		UNDEFINED	790 THROUGH 799	
		LWC GENERAL	800	
		UNDEFINED	801 THROUGH 810	
		LCU GENERAL	811	
		BALIKPAPAN	812	
		BOMBARDA	813	
		BRAILA	814	
		LCU (TYPE 520)	815	
		DISUSED	816	
		DISUSED	817	
		DISUSED	818	
		DSM-501	819	
		HANCHON	820	
		HANTAE	821	
		KISHON	822	
		KVALSUND	823	
		LCT MK 5	824	
		LCT MK 6	825	

FIELD CODING FOR J3.7C5

(SHEET 37)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		LCU 501	826	
		MFP D-3	827	
		MZ	828	
		REINOYSUND	829	
		SMB-1	830	
		TU 57-M	831	
		US LCU 1466	832	
		VYDRA	833	
		YURA	834	
		UNDEFINED	835 THROUGH 866	
		LCVP GENERAL	867	
		UNDEFINED	868 THROUGH 877	
		LCAC GENERAL	878	
		AIST	879	
		GUS	880	
		LEBED	881	
		UTENOK	882	
		WELLINGTON BH-7 MK 4	883	
		WELLINGTON BH-7 MK 5	884	
		WINCHESTER (SR.N6)	885	
		UNDEFINED	886 THROUGH 896	
		MM GENERAL	897	
		ALESHA	898	
		ALVSBORG	899	
		BORGEN	900	
		CARLSKRONA	901	
		COSAR	902	
		FALSTER	903	
		FURUSUND (MUL-20)	904	
		LANGELAND	905	
		LINDORMEN	906	
		LSM-1 (MODIFIED)	907	
		MUL-11	908	
		MUL-12	909	
		DISUSED	910	
		SMITH	911	
		US YMP	912	
		VIDAR	913	
		UNDEFINED	914 THROUGH 935	
		MCS GENERAL	936	
		UNDEFINED	937 THROUGH 946	
		MCJ GENERAL	947	

5.1-900

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		UNDEFINED	948 THROUGH 957	
		MCD GENERAL	958	
		KINGSTON	959	
		MUEHLHAUSEN MCD (TYPE 742A)	960	
		UNDEFINED	961 THROUGH 968	
		MCM GENERAL	969	
		UNDEFINED	970 THROUGH 979	
		MH GENERAL	980	
		UNDEFINED	981 THROUGH 990	
		MHO GENERAL	991	
		UNDEFINED	992 THROUGH 1001	
		MHC GENERAL	1002	
		ADJUTANT (MODIFIED)	1003	
		AGGRESSIVE	1004	
		CIRCE	1005	
		WEIDEN MHC (TYPE 332)	1006	
		KOBLENZ MHC (TYPE 331B)	1007	
		HAM	1008	
		HUNT	1009	
		LANDSORT	1010	
		LERICI	1011	
		MSC 50	1012	
		MSO 218	1013	
		MSO 503	1014	
		SAUDA	1015	
		SIRIUS	1016	
		DISUSED	1017	
		TRIPARTITE	1018	
		VANYA I	1019	
		SANDOWN (SRMH)	1020	
		UNDEFINED	1021 THROUGH 1029	
		MHSC GENERAL	1030	
		MARS	1031	
		UNDEFINED	1032 THROUGH 1043	
		MHI GENERAL	1044	
		BAY	1045	
		UNDEFINED	1046 THROUGH 1054	
		MHA GENERAL	1055	
		UNDEFINED	1056 THROUGH 1065	
		ML GENERAL	1066	
		UNDEFINED	1067 THROUGH 1076	

FIELD CODING FOR J3.7C5

(SHEET 39)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		MLC GENERAL	1077	
		CURLEW	1078	
		UNDEFINED	1079 THROUGH 1088	
		MLI GENERAL	1089	
		UNDEFINED	1090 THROUGH 1099	
		MLO GENERAL	1100	
		UNDEFINED	1101 THROUGH 1110	
		MLR GENERAL	1111	
		UNDEFINED	1112 THROUGH 1121	
		MLA GENERAL	1122	
		UNDEFINED	1123 THROUGH 1132	
		MLS GENERAL	1133	
		UNDEFINED	1134 THROUGH 1143	
		MS GENERAL	1144	
		UNDEFINED	1145 THROUGH 1154	
		MSF GENERAL	1155	
		EX-ERIMO	1156	
		K-8	1157	
		KROGULEC	1158	
		M-40	1159	
		MSO-421	1160	
		NATYA I	1161	
		NATYA II	1162	
		RIVER	1163	
		T-43	1164	
		YURKA	1165	
		UNDEFINED	1166 THROUGH 1180	
		MSO GENERAL	1181	
		ACME	1182	
		AGGRESSIVE	1183	
		UNDEFINED	1184 THROUGH 1193	
		MSC GENERAL	1194	
		136 FT	1195	
		ADJUTANT	1196	
		ARKOE	1197	
		BAY	1198	
		DOKKUM	1199	
		HATSUSHIMA	1200	
		HAYASE	1201	
		DISUSED	1202	
		KOUZJ	1203	
		LENIWKA	1204	

5.1-902

MIL-STD-6016B

FIELD CODING FOR J3.7C5

(SHEET 40)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		HAMELN MSC (TYPE 343)	1205	
		MSC 268	1206	
		MSC 292	1207	
		MSC 294	1208	
		NOTEC	1209	
		SASHA	1210	
		SAUDA	1211	
		DISUSED	1212	
		DISUSED	1213	
		SONYA	1214	
		T-301	1215	
		T-43	1216	
		TAKAMI	1217	
		DISUSED	1218	
		VANYA	1219	
		VANYA I	1220	
		VANYA II	1221	
		WUSONG	1222	
		ZHENYA	1223	
		UNDEFINED	1224 THROUGH 1263	
		MSI GENERAL	1264	
		DISUSED	1265	
		AUX MINESWEEPER NO 1	1266	
		CAPE	1267	
		FRAUENLOB (TYPE 394)	1268	
		HAM	1269	
		HERSTAL	1270	
		KIISKI	1271	
		KUHA	1272	
		M-111	1273	
		M-15	1274	
		M-31	1275	
		M-43/47	1276	
		PIPA-A	1277	
		WOCHANG	1278	
		YEVGENYA	1279	
		YUKTO	1280	
		UNDEFINED	1281 THROUGH 1302	
		MSR GENERAL	1303	
		UNDEFINED	1304 THROUGH 1313	
		MSB GENERAL	1314	
		K-8	1315	

5.1-903

MIL-STD-6016B

FIELD CODING FOR J3.7C5

(SHEET 41)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		N-300	1316	
		NESTIN	1317	
		NØ. 7	1318	
		OLYA	1319	
		PO-2	1320	
		TR-40	1321	
		VD-141	1322	
		VULCAIN	1323	
		STYX	1324	
		PLUTON	1325	
		ACHERON	1326	
		UNDEFINED	1327 THROUGH 1334	
		MSA GENERAL	1335	
		UNDEFINED	1336 THROUGH 1345	
		MSD GENERAL	1346	
		HFG-1 (TROIKA)	1347	
		ILYUSHA	1348	
		UNDEFINED	1349 THROUGH 1358	
		MCSD GENERAL	1359	
		UNDEFINED	1360 THROUGH 1369	
		MSS GENERAL	1370	
		ANDRYUSHA	1371	
		BALTIKA	1372	
		POLNOCNY	1373	
		UNDEFINED	1374 THROUGH 1383	
		MSH GENERAL	1384	
		UNDEFINED	1385 THROUGH 1394	
		MSO GENERAL	1395	
		BERLAIMONT (MODIFIED)	1396	
		UNDEFINED	1397 THROUGH 1405	
		MSHC GENERAL	1406	
		HUNT	1407	
		TRIPARTITE	1408	
		WILTON	1409	
		UNDEFINED	1410 THROUGH 1419	
		PP GENERAL	1420	
		AB 25	1421	
		UNDEFINED	1422	
		BALDER	1423	
		CASTLE	1424	
		ISLAND	1425	
		KRONSHTADT	1426	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		PC-1638	1427	
		UNDEFINED	1428	THROUGH 1438
		PG GENERAL	1439	
		BESKYTTEVREN	1440	
		BIHORO	1441	
		ERIMO	1442	
		DISUSED	1443	
		HVIDBJOERNEN	1444	
		IZU	1445	
		KOJIMA	1446	
		UNDEFINED	1447	
		NOJIMA	1448	
		PAUK	1449	
		PEACOCK	1450	
		POTI	1451	
		SAVAGE	1452	
		SHIRETOKO	1453	
		SOYA	1454	
		TACOMA	1455	
		LEOPARD (TYPE 148)	1456	
		BAMBU	1457	
		CASSIOPEA	1458	
		UNDEFINED	1459	THROUGH 1480
		PGS GENERAL	1481	
		UNDEFINED	1482	THROUGH 1491
		PGB GENERAL	1492	
		UNDEFINED	1493	THROUGH 1502
		PGF GENERAL	1503	
		ALBATROS (TYPE 143)	1504	
		ASHEVILLE	1505	
		BARNEGAT	1506	
		CHONGJU	1507	
		GEPARD (TYPE 143A)	1508	
		HOUKU	1509	
		IVANSUSANIN	1510	
		KAMAN	1511	
		KARTAL	1512	
		KOMAR	1513	
		LA COMBATTANTE II	1514	
		LA COMBATTANTE III	1515	
		LURSSSEN FPB 57 TYPE	1516	
		OKHTENSKIY	1517	

FIELD CODING FOR J3.7C5

(SHEET 43)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		OSA I	1518	
		OSA II	1519	
		P-4	1520	
		PURGA	1521	
		SAAR 2	1522	
		SAAR 3	1523	
		SAAR 4	1524	
		SAAR 5	1525	
		SARIWON	1526	
		SNOEGG	1527	
		SOHUNG	1528	
		SOJU	1529	
		SORUM	1530	
		STORM	1531	
		T	1532	
		T-43	1533	
		T-58	1534	
		VOSPER 100-FT	1535	
		VOSPER BRAVE	1536	
		WILLEMOES	1537	
		UNDEFINED	1538 THROUGH 1583	
		PC GENERAL	1584	
		ADMIRABLE	1585	
		AGDLEK	1586	
		AKIZUKI	1587	
		ATTACK	1588	
		BAY	1589	
		DISUSED	1590	
		BROOKE MARINE 108-FT	1591	
		CACINE	1592	
		CHONGJU	1593	
		DAPHNE	1594	
		GDANSK	1595	
		HAIKOU	1596	
		HAINAN	1597	
		HANOE	1598	
		K-48	1599	
		KRALJEVICA	1600	
		KRONSHADT	1601	
		LAKE	1602	
		MAGAEN	1603	
		MATSUNAMI	1604	

FIELD CODING FOR J3.7C5

(SHEET 44)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		MIZUTORI	1605	
		MURAKUMO	1606	
		OBLUZE	1607	
		PGM 71	1608	
		SDB MK II	1609	
		SDB MK III	1610	
		SEAFORTH	1611	
		SHANGHAI	1612	
		SHANGHAI II	1613	
		SHANGHAI II (MODIFIED)	1614	
		SHIKINAMI	1615	
		SO-1	1616	
		SOMAN	1617	
		STENKA	1618	
		T-58	1619	
		TAECHONG	1620	
		UK FORD	1621	
		UMIGIRI	1622	
		US 110-FT	1623	
		US 173-FT	1624	
		UNDEFINED	1625	
		ARCHER	1626	
		ATTACKER	1627	
		23M PC (MANLY)	1628	
		UNDEFINED	1629	THROUGH 1681
		PCF GENERAL	1682	
		BABOCHKA	1683	
		MURAVEY	1684	
		POTI	1685	
		SO-1 (MODIFIED)	1686	
		UNDEFINED	1687	THROUGH 1696
		PCE GENERAL	1697	
		UNDEFINED	1698	THROUGH 1707
		PB GENERAL	1708	
		AKAGI	1709	
		AKIZUKI	1710	
		ALBATROZ	1711	
		ATTACK P-90	1712	
		BARSO	1713	
		BAY	1714	
		BIZAN	1715	
		BROOKE MARINE 37.5M	1716	

5.1-907

MIL-STD-6016B

FIELD CODING FOR J3.7C5

(SHEET 45)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		CHONGJIN	1717	
		DABUR	1718	
		DALARO	1719	
		DE L'ESTEREL	1720	
		DILOS	1721	
		DOM ALEIXO	1722	
		DISUSED	1723	
		FREMANTLE	1724	
		GOULANDRIS	1725	
		GUANABACOA	1726	
		HAMAGIRI	1727	
		HAMELIN 37M	1728	
		HIDAKA	1729	
		HUANGPU	1730	
		INTERCEPTOR MK II	1731	
		KIMJIN 67-FT	1732	
		MATSUNAMI	1733	
		MURAKUMO	1734	
		OIRASE	1735	
		P 400	1736	
		P-6	1737	
		PANAGOPOULOS	1738	
		PATRA	1739	
		PBR MK II	1740	
		PBR MK III	1741	
		PGM 71	1742	
		PO-2	1743	
		POLISH K-8	1744	
		POLUCHAT I	1745	
		SHANTOU	1746	
		SHIKINAMI	1747	
		SINHUNG 72-FT	1748	
		SKANOER	1749	
		SOYA/TSUGARU	1750	
		SPEAR	1751	
		STEWART 85-FT	1752	
		SWATOW	1753	
		SWIFT	1754	
		TAISHAN	1755	
		TESHIO	1756	
		TRACKER II	1757	
		US 110-FT	1758	

FIELD CODING FOR J3.7C5

(SHEET 46)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		US ARMY 2001 65-FT	1759	
		USCG 83-FT	1760	
		VEDETTE 28 92-FT	1761	
		VIKRAM	1762	
		VOSPER 70-FT	1763	
		YAMAYURI	1764	
		ZHUK	1765	
		SNOEGG	1766	
		MARS	1767	
		TRIDENT	1768	
		UNDEFINED	1769 THROUGH 1842	
		PBF GENERAL	1843	
		CHAO (CHODO)	1844	
		DE L'ESTEREL	1845	
		GIRNE	1846	
		HAUK	1847	
		HUGIN	1848	
		SLEPEN	1849	
		UNDEFINED	1850	
		SPICA II	1851	
		MARS	1852	
		UNDEFINED	1853 THROUGH 1863	
		PBS GENERAL	1864	
		UNDEFINED	1865 THROUGH 1874	
		PBR GENERAL	1875	
		LEIE	1876	
		PIYAVKA	1877	
		SHMEL	1878	
		VOSH	1879	
		YATUSH	1880	
		YAZ	1881	
		UNDEFINED	1882 THROUGH 1891	
		PT GENERAL	1892	
		AN JU	1893	
		EPITROP	1894	
		HIGGINS 78-FT	1895	
		HUCHUAN PTH-	1896	
		HUZHOU	1897	
		IWON	1898	
		DISUSED	1899	
		KU SONG	1900	
		NO. 11	1901	

FIELD CODING FOR J3.7C5

(SHEET 47)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		P-4	1902	
		P-6	1903	
		PILICA	1904	
		SHERSHEN	1905	
		SIN HUNG	1906	
		SIN NAM	1907	
		SINPO	1908	
		SOLOVEN	1909	
		SPICA	1910	
		TJELD	1911	
		WISLA	1912	
		DISUSED	1913	
		SHANGDONG	1914	
		TURYA	1915	
		UNDEFINED	1916 THROUGH 2047	
		PHM GENERAL	2048	
		MATKA	2049	
		PEGASUS	2050	
		SARANCHA	2051	
		SHIMRIT	2052	
		SPARVIERO	2053	
		UNDEFINED	2054 THROUGH 2063	
		BM GENERAL	2064	
		UNDEFINED	2065 THROUGH 2074	
		BMR GENERAL	2075	
		UNDEFINED	2076 THROUGH 2085	
		SWCL GENERAL	2086	
		UNDEFINED	2087 THROUGH 2096	
		AA GENERAL	2097	
		UNDEFINED	2098 THROUGH 2107	
		AG GENERAL	2108	
		ADOLF	2109	
		AKIZUKI	2110	
		ANGARA	2111	
		ARGO	2112	
		AYANAMI	2113	
		DISUSED	2114 THROUGH 2115	
		CHAMOIS	2116	
		CHIHAYA	2117	
		DALDYN	2118	
		DISUSED	2119	
		DINGHAI	2120	

FIELD CODING FOR J3.7C5

(SHEET 48)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		ENDURANCE	2121	
		EXPLORER	2122	
		DISUSED	2123	
		FRIPONNE	2124	
		GALEB	2125	
		UNDEFINED	2126	
		HAM	2127	
		DISUSED	2128	
		HAYABUSA	2129	
		DISUSED	2130	
		ISLES	2131	
		KEYLA	2132	
		KURIHAMA	2133	
		L' ARCHEONAUTE	2134	
		L' ATHOS	2135	
		UNDEFINED	2136	
		LENTRA	2137	
		LIANYUN	2138	
		LSIL	2139	
		MIZUTORI	2140	
		MP-2	2141	
		MP-8	2142	
		MURASAME	2143	
		NEFTEGAZ	2144	
		NØ. 81	2145	
		NORGE	2146	
		OHRE	2147	
		ONEGA	2148	
		DISUSED	2149	
		POSEIDON	2150	
		PS-10	2151	
		RARI	2152	
		RHIN	2153	
		SABAC	2154	
		SHAHSAVAR	2155	
		ST. LYKODIS	2156	
		STALWART	2157	
		T-43	2158	
		TAPATAI	2159	
		TAPPE	2160	
		THULE	2161	
		TOMBA	2162	

FIELD CODING FOR J3.7C5

(SHEET 49)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		TSUGARU	2163	
		UMITAKA	2164	
		US 184 FT. PCE	2165	
		US 72 FT. HMDL	2166	
		VANGUARD	2167	
		VIS	2168	
		VYTEGRALES	2169	
		WHISKEY	2170	
		WILHELM PULLWER (TYPE 741)	2171	
		PELIKAAN	2172	
		RANCE	2173	
		MERCURE	2174	
		STERNE	2175	
		ALBATROS	2176	
		PHENIX	2177	
		UNDEFINED	2178 THROUGH 2256	
		ARV GENERAL	2257	
		ARGUS	2258	
		ENGADINE	2259	
		RELIANT	2260	
		UNDEFINED	2261 THROUGH 2270	
		AVT GENERAL	2271	
		LEXINGTON	2272	
		UNDEFINED	2273 THROUGH 2282	
		AE GENERAL	2283	
		EVROS	2284	
		DISUSED	2285	
		KILAUEA	2286	
		NITRO	2287	
		REGENT	2288	
		SURIBACHI	2289	
		WESTERWALD (TYPE 760)	2290	
		UNDEFINED	2291 THROUGH 2301	
		AEL GENERAL	2302	
		UNDEFINED	2303 THROUGH 2312	
		AET GENERAL	2313	
		UNDEFINED	2314 THROUGH 2323	
		AETL GENERAL	2324	
		UNDEFINED	2325 THROUGH 2334	
		AGF GENERAL	2335	
		ABDIEL	2336	

5.1-912

MIL-STD-6016B

FIELD CODING FOR J3.7C5

(SHEET 50)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		CORONADO	2337	
		GODETIA	2338	
		LA SALLE	2339	
		DISUSED	2340	
		ZINNIA	2341	
		ELBE (TYPE 404)	2342	
		UNDEFINED	2343	THROUGH 2351
		ACM GENERAL	2352	
		UNDEFINED	2353	THROUGH 2362
		APB GENERAL	2363	
		MICHELANGELO	2364	
		UNDEFINED	2365	THROUGH 2374
		ABU GENERAL	2375	
		CARDENAS	2376	
		FINIK I	2377	
		KARPF II	2378	
		SKB 64	2379	
		YANTAI	2380	
		YANNAN	2381	
		YANGUAN	2382	
		TIANEE	2383	
		LA PRUDENTE	2384	
		UNDEFINED	2385	THROUGH 2395
		ABUD GENERAL	2396	
		UNDEFINED	2397	THROUGH 2406
		ANL GENERAL	2407	
		UNDEFINED	2408	THROUGH 2417
		ARC GENERAL	2418	
		EMBA I	2419	
		EMBA II	2420	
		KALAR	2421	
		KLASMA	2422	
		MP-2	2423	
		NEPTUNE	2424	
		TELNOVSK (MODIFIED)	2425	
		YOUDIAN	2426	
		ZEUS	2427	
		UNDEFINED	2428	THROUGH 2440
		AK GENERAL	2441	
		2ND LT JOHN P BOBO	2442	
		ALCHIBA	2443	
		AMGUEMA	2444	

5.1-913

MIL-STD-6016B

FIELD CODING FOR J3.7C5

(SHEET 51)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		ANDIZHAN	2445	
		ANDONG	2446	
		ANDROMEDA (CONVERTED)	2447	
		DISUSED	2448	
		BARRICADE	2449	
		BITTERBUSH	2450	
		C3-S-33A TYPE	2451	
		(CONVERTED)		
		C4-S-66A TYPE	2452	
		C4-S-69B TYPE	2453	
		C4-S-A3 TYPE	2454	
		C5-S-75A TYPE	2455	
		CHULYM	2456	
		CPL LOUIS J HAUGE JR	2457	
		DINGHAI	2458	
		DONBA SS	2459	
		FS DESIGN 330	2460	
		GALATI	2461	
		HONGQI	2462	
		ISLES	2463	
		KANARYA	2464	
		KOLOMNA	2465	
		LENINGRADSKY KOMSOMOLETS	2466	
		LSIL	2467	
		NEON ANTONOV	2468	
		NORWALK	2469	
		PT-61	2470	
		SGT MATEJ KOCAK	2471	
		THROSK	2472	
		TREE	2473	
		YANHANG	2474	
		YUNYY PARTIZAN	2475	
		UNDEFINED	2476 THROUGH 2521	
		AKL GENERAL	2522	
		ELTANIN	2523	
		KEYLA	2524	
		UNDEFINED	2525	
		LENTA	2526	
		UNDEFINED	2527	
		MP 4	2528	
		MP 6	2529	
		MUNA	2530	

FIELD CODING FOR J3.7C5

(SHEET 52)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		SEKSTAN	2531	
		TELNOVSK	2532	
		WISTING	2533	
		GORGONA	2534	
		UNDEFINED	2535	THROUGH 2549
		AKR GENERAL	2550	
		ALGOL (SL 7)	2551	
		CALLAGHAN	2552	
		COMET	2553	
		METEOR	2554	
		DISUSED	2555	
		MAINE (CONVERTED)	2556	
		UNDEFINED	2557	THROUGH 2566
		AFS GENERAL	2567	
		FORT	2568	
		UNDEFINED	2569	
		MARS	2570	
		RESOURCE	2571	
		UNDEFINED	2572	THROUGH 2580
		AOE GENERAL	2581	
		SACRAMENTO	2582	
		SAGAMI	2583	
		UNDEFINED	2584	THROUGH 2593
		AD GENERAL	2594	
		YELLOWSTONE	2595	
		SAMUEL GOMPERS	2596	
		DIXIE	2597	
		STALWART	2598	
		UNDEFINED	2599	THROUGH 2608
		AWW GENERAL	2609	
		UNDEFINED	2610	THROUGH 2619
		AH GENERAL	2620	
		HAVEN	2621	
		OB	2622	
		DISUSED	2623	
		UNDEFINED	2624	THROUGH 2632
		AGB GENERAL	2633	
		DOBRYNYA NIKITICH	2634	
		HANSE	2635	
		IVANSUSANIN	2636	
		SHIRASE	2637	
		YANHA	2638	

FIELD CODING FOR J3.7C5

(SHEET 53)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		UNDEFINED	2639 THROUGH 2648	
		AGBL GENERAL	2649	
		EISVOGEL (TYPE 721)	2650	
		DISUSED	2651	
		UNDEFINED	2652 THROUGH 2661	
		AGI GENERAL	2662	
		ALPINIST	2663	
		ARMINZA	2664	
		UNDEFINED	2665	
		BALZAM	2666	
		BOLOGOE	2667	
		DISUSED	2668	
		HAM	2669	
		DISUSED	2670	
		DISUSED	2671	
		LENTRA	2672	
		MAYAK	2673	
		MIRNYY	2674	
		MOMA	2675	
		NIKOLAY ZUBOV	2676	
		OKEAN	2677	
		DISUSED	2678	
		PAMIR	2679	
		PRIMORYE	2680	
		ALSTER (TYPE 423)	2681	
		UNDEFINED	2682 THROUGH 2705	
		ALS GENERAL	2706	
		UNDEFINED	2707 THROUGH 2716	
		AEM GENERAL	2717	
		AMGA	2718	
		ANDIZHAN (MODIFIED)	2719	
		LAMA	2720	
		MALINA	2721	
		MELITOPOL	2722	
		MP 6	2723	
		UNDEFINED	2724 THROUGH 2733	
		AGM GENERAL	2734	
		AGM-24	2735	
		GEN HOYT S VANDENBERG	2736	
		OBSERVATION ISLAND	2737	
		RANGE SENTINEL	2738	
		(HASKELL TYPE)		

FIELD CODING FOR J3.7C5

(SHEET 54)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		REDSTONE	2739	
		UNDEFINED	2740 THROUGH 2749	
		AGOR GENERAL	2750	
		ABKHAZIYA	2751	
		AKADEMIK KRYLOV	2752	
		ARAD	2753	
		BALIKPAPAN	2754	
		BELGICA	2755	
		DISUSED	2756	
		COOK	2757	
		D'ENTRECASTEAUX	2758	
		DOBRYNYA NIKITICH	2759	
		DONG MING	2760	
		ELTANIN	2761	
		ENDEAVOR	2762	
		FRANCESCO NULLO	2763	
		DISUSED	2764	
		GRIGORE ANTIPA	2765	
		GYRE	2766	
		HAYES	2767	
		HECLA	2768	
		MELVILLE	2769	
		MSC 60	2770	
		NAUTILUS	2771	
		NEVELSKOY	2772	
		NIKOLAY ZUBOV	2773	
		PITHEAS	2774	
		POLYUS	2775	
		QUEST	2776	
		ROBERT D CONRAD	2777	
		T-43	2778	
		TRITON	2779	
		TUI	2780	
		TYDEMAN	2781	
		XIANG YANG HONG	2782	
		YANLUN	2783	
		YUG	2784	
		ZENOBE GRAMME	2785	
		MAYAK	2786	
		UNDEFINED	2787 THROUGH 2823	
		AGOB GENERAL	2824	
		POLARSTERN	2825	

5.1-917

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		UNDEFINED	2826 THROUGH 2835	
		AGOS GENERAL	2836	
		UNDEFINED	2837 THROUGH 2845	
		AO GENERAL	2846	
		UNDEFINED	2847	
		AKAR	2848	
		ALBAY BURBAK	2849	
		ALTAY	2850	
		UNDEFINED	2851	
		BASKUNCHAK	2852	
		BAYLEAF	2853	
		BINBASI GURGAN	2854	
		DISUSED	2855	
		CIMARRON	2856	
		CIMARRON (JUMBOISED)	2857	
		DORA	2858	
		HAMANA	2859	
		DISUSED	2860	
		DISUSED	2861	
		HENRY J KAISER	2862	
		IRTYSH	2863	
		KALININGRADNEFT	2864	
		KHOBİ	2865	
		KONDA	2866	
		METTAWEE	2867	
		MISPILLION (JUMBOISED)	2868	
		MOSKIT	2869	
		NEOSHO	2870	
		NERCHA	2871	
		NORWEGIAN BOW	2872	
		OLEKMA	2873	
		PATAPSCO	2874	
		PEVEK	2875	
		UNDEFINED	2876	
		SOFIYA	2877	
		SPESSART (TYPE 704A)	2878	
		TASKIZAK	2879	
		USEDOM	2880	
		WALCHENSEE (TYPE 703)	2881	
		WAVE	2882	
		DISUSED	2883	
		YUZBASI TOLUNAY	2884	

FIELD CODING FOR J3.7C5

(SHEET 56)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		BRAMBLELEAF	2885	
		UNDEFINED	2886 THROUGH 2936	
		AOT GENERAL	2937	
		AMERICAN EXPLORER	2938	
		AOTL	2939	
		EBANOL	2940	
		FULIN	2941	
		FUZHOU	2942	
		GUANZGHOU	2943	
		LEIZHOU	2944	
		MAUMEE	2945	
		METTAWEE	2946	
		MISSION	2947	
		POTOMOC	2948	
		SEALIFT	2949	
		SUAMICO	2950	
		T 5 TYPE	2951	
		TM2	2952	
		PORT VENDRES	2953	
		UNDEFINED	2954 THROUGH 2973	
		AOTL GENERAL	2974	
		DISUSED	2975	
		KH0BI	2976	
		UNDEFINED	2977 THROUGH 2986	
		AOR GENERAL	2987	
		BANDAR ABBAS	2988	
		BEREZINA	2989	
		BORIS CHILIKIN	2990	
		CAPITAN OLA PANTOJA	2991	
		DEEPAK	2992	
		DUBNA	2993	
		DURANCE	2994	
		FUQING	2995	
		KAZBEK	2996	
		KHARG	2997	
		MEERSBURG (TYPE 701C)	2998	
		MESAR	2999	
		OLWEN	3000	
		POOLSTER	3001	
		POLYARNIK	3002	
		PROTECTEUR	3003	
		PROVIDER	3004	

FIELD CODING FOR J3.7C5

(SHEET 57)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		ROVER	3005	
		SAO GABRIEL	3006	
		STROMBOLI	3007	
		TIDE (IMPROVED)	3008	
		UDA	3009	
		WICHITA	3010	
		FORT VICTORIA	3011	
		BERLIN (TYPE 702C)	3012	
		UNDEFINED	3013 THROUGH 3042	
		AORL GENERAL	3043	
		LEIZHOU	3044	
		UNDEFINED	3045 THROUGH 3054	
		AOL GENERAL	3055	
		PUNARUU	3056	
		UNDEFINED	3057 THROUGH 3065	
		AGP GENERAL	3066	
		GRAHAM COUNTY	3067	
		NORGE	3068	
		DISUSED	3069	
		MERCUUR	3070	
		UNDEFINED	3071 THROUGH 3079	
		AP GENERAL	3080	
		MIKHAIL KALININ	3081	
		PANDORA	3082	
		QIONGSHA	3083	
		UNDEFINED	3084 THROUGH 3093	
		AGR GENERAL	3094	
		UNDEFINED	3095 THROUGH 3104	
		AOSR GENERAL	3105	
		UNDEFINED	3106 THROUGH 3115	
		AR GENERAL	3116	
		ACHELOUS	3117	
		AJAX	3118	
		AMPHION	3119	
		AMUR	3120	
		ARL I	3121	
		DALIANG	3122	
		DILIGENCE	3123	
		DIXIE	3124	
		JULES VERNE	3125	
		OSKOL	3126	
		RHIN	3127	

5.1-920

MIL-STD-6016B

FIELD CODING FOR J3.7C5

(SHEET 58)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		STALWART	3128	
		UNDEFINED	3129 THROUGH 3145	
		ARL GENERAL	3146	
		ARCHELOUS	3147	
		UNDEFINED	3148 THROUGH 3157	
		AGE GENERAL	3158	
		BELGICA	3159	
		BERRY	3160	
		UNDEFINED	3161	
		COMMANDANT RIVIERE	3162	
		DESNÁ	3163	
		DOBRYNYA NIKITICH	3164	
		EF 3	3165	
		HENRI POINCARE	3166	
		ILE D'OLERON	3167	
		IVANSUSANIN	3168	
		KOLOMNA	3169	
		LENTRA	3170	
		MARSHAL NEDELIN	3171	
		MOMA	3172	
		MP-8	3173	
		MUNA	3174	
		NARVIK	3175	
		OS-3	3176	
		POINT LOMA	3177	
		POTOK	3178	
		QUARTO	3179	
		SASHA	3180	
		SIBIR	3181	
		SO-1	3182	
		T-43	3183	
		TRITON	3184	
		DISUSED	3185	
		YAL 01	3186	
		YANXI	3187	
		ROSSETTI	3188	
		DENTI	3189	
		MONGE	3190	
		UNDEFINED	3191 THROUGH 3227	
		ARS GENERAL	3228	
		BOLSTER	3229	
		DISUSED	3230	

FIELD CODING FOR J3.7C5

(SHEET 59)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		INGUL	3231	
		KATUN I	3232	
		KATUN II	3233	
		KOWAN	3234	
		LSIL 351	3235	
		MIKHAIL RUDNITSKY	3236	
		OREL	3237	
		PAMIR	3238	
		PIAST	3239	
		PROTEO	3240	
		PS-11	3241	
		SAFEGUARD	3242	
		SILVA	3243	
		SPASILAC	3244	
		DISUSED	3245	
		US 149 FT	3246	
		YANDING	3247	
		UNDEFINED	3248 THROUGH 3273	
		ARSD GENERAL	3274	
		UNDEFINED	3275 THROUGH 3284	
		ASVR GENERAL	3285	
		UNDEFINED	3286 THROUGH 3295	
		AOS GENERAL	3296	
		ALATNA	3297	
		LUZA	3298	
		URAL	3299	
		VALA	3300	
		TONTI	3301	
		UNDEFINED	3302 THROUGH 3311	
		AF GENERAL	3312	
		CROITOR	3313	
		DANLIN	3314	
		MAYAK	3315	
		RIEGEL	3316	
		UNDEFINED	3317 THROUGH 3326	
		AKS GENERAL	3327	
		UNDEFINED	3328 THROUGH 3337	
		AKSL GENERAL	3338	
		UNDEFINED	3339 THROUGH 3348	
		AFL GENERAL	3349	
		UNDEFINED	3350 THROUGH 3359	
		ASR GENERAL	3360	

5.1-922

MIL-STD-6016B

FIELD CODING FOR J3.7C5

(SHEET 60)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		ANTEO	3361	
		CHANTICLEER	3362	
		DAHIANG	3363	
		DALANG	3364	
		ELBRUS	3365	
		FEHMARN (TYPE 720B)	3366	
		FUSHIMI	3367	
		GALATI	3368	
		HUDONG	3369	
		KURTARAN	3370	
		NEPA	3371	
		PIGEON	3372	
		PRUT	3373	
		ROSLAVL	3374	
		SPASILAC	3375	
		VALDAY	3376	
		ZHONGHUA	3377	
		UNDEFINED	3378 THROUGH 3401	
		AS GENERAL	3402	
		ACHELOUS	3403	
		AEGIR	3404	
		DISUSED	3405	
		ATREK	3406	
		CHIYODA	3407	
		DADONG	3408	
		DAZHOU	3409	
		DIVER	3410	
		DNEPR	3411	
		DNEPR (MODIFIED)	3412	
		DON	3413	
		EMORY S LAND	3414	
		FULTON	3415	
		HUNLEY	3416	
		L Y SPEAR	3417	
		PROTEUS	3418	
		DISUSED	3419	
		SIMON LAKE	3420	
		UGRA	3421	
		UNDEFINED	3422 THROUGH 3447	
		ASL GENERAL	3448	
		UNDEFINED	3449 THROUGH 3458	
		AGS GENERAL	3459	

FIELD CODING FOR J3.7C5

(SHEET 61)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		AGS 39 CLASS	3460	
		AKASHI	3461	
		ALMEIDA CARVALHO	3462	
		AMMIRAGLIO MAGNAGHI	3463	
		ANDRIJA MOHOROVICIC	3464	
		AUK	3465	
		BIYA	3466	
		BOLOGUE	3467	
		UNDEFINED	3468	
		BUYSKES	3469	
		C4-S-A1 TYPE (CONVERTED)	3470	
		CHAUVENET	3471	
		COOK	3472	
		DING HAI	3473	
		FINIK	3474	
		FS DESIGN 330	3475	
		FUTAMI	3476	
		HAMASHIO	3477	
		HEIYO	3478	
		KAIBOKAN I	3479	
		KAIYO	3480	
		KAMENKA	3481	
		DISUSED	3482	
		UNDEFINED	3483	
		L'ESPERANCE	3484	
		UNDEFINED	3485	
		LENTRA	3486	
		LSIL	3487	
		MEIYO	3488	
		MELITOPOL	3489	
		MOMA	3490	
		MONOWAI	3491	
		MORESBY	3492	
		MP-8	3493	
		MSC-294 (BLUEBIRD)	3494	
		NYRYAT I	3495	
		NYRYAT II	3496	
		SAMARA	3497	
		SHOYO	3498	
		SILAS BENT	3499	
		STERNE	3500	
		SUMA	3501	

FIELD CODING FOR J3.7C5

(SHEET 62)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		T-43	3502	
		TAKUYO	3503	
		TELNOVSK	3504	
		TELNOVSK (MODIFIED)	3505	
		TENYO	3506	
		VICTORY (CONVERTED)	3507	
		WILKES	3508	
		YANLAI	3509	
		YANXU	3510	
		MIRTO	3511	
		MARS	3512	
		LAPEROUSE	3513	
		UNDEFINED	3514 THROUGH 3579	
		AGSA GENERAL	3580	
		UNDEFINED	3581 THROUGH 3590	
		AGSC GENERAL	3591	
		EXPLORER	3592	
		FLINDERS	3593	
		TAINO	3594	
		BULLDOG	3595	
		ROEBUCK	3596	
		UNDEFINED	3597 THROUGH 3604	
		AX GENERAL	3605	
		ARIS	3606	
		DISUSED	3607	
		JADRAN	3608	
		JERVIS BAY	3609	
		JOSE MARTI	3610	
		MP-8	3611	
		SMOLNY	3612	
		UGRA	3613	
		VIETNAM HEROICO	3614	
		WODNIK	3615	
		UNDEFINED	3616 THROUGH 3630	
		AXL GENERAL	3631	
		UNDEFINED	3632	
		LEOPARD	3633	
		MAYAK	3634	
		UNDEFINED	3635 THROUGH 3642	
		AXS GENERAL	3643	
		AMERIGO VESPUCCI	3644	
		CAROLY	3645	

5.1-925

MIL-STD-6016B

FIELD CODING FOR J3.7C5

(SHEET 63)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		CARSARO II	3646	
		GORCH FOCK (TYPE 441A)	3647	
		MIRCEA	3648	
		PALINURO	3649	
		SAGRES	3650	
		STELLA POLARE	3651	
		UNDEFINED	3652	THROUGH 3659
		AT GENERAL	3660	
		UNDEFINED	3661	THROUGH 3665
		ATA GENERAL	3666	
		ABNAKI	3667	
		APACHE	3668	
		ARMY 254	3669	
		ATAK	3670	
		ATLANTE	3671	
		AZUMA	3672	
		BELIER	3673	
		UNDEFINED	3674	
		GAJ	3675	
		GNIEWKO	3676	
		GORYN	3677	
		GROMOVOY	3678	
		KUDRET	3679	
		MAITO	3680	
		MB-31	3681	
		MB-65	3682	
		MOTYL	3683	
		OKHTENSKIY	3684	
		ONCU	3685	
		POWHATAN	3686	
		ROSLAVL	3687	
		ROYSTERER	3688	
		SAINT	3689	
		SCHULTZ XAVIER	3690	
		SORUM	3691	
		TENACE	3692	
		TUZHONG	3693	
		TYPHOON	3694	
		WANGER00GE (TYPE 722B)	3695	
		ZENIT	3696	
		MAITO	3697	
		ARMEN	3698	

FIELD CODING FOR J3.7C5

(SHEET 64)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		UNDEFINED	3699 THROUGH 3737	
		ATR GENERAL	3738	
		TENACE	3739	
		UNDEFINED	3740 THROUGH 3748	
		ATS GENERAL	3749	
		EDENTON	3750	
		OKHTENSKY	3751	
		LANGEOOG (TYPE 754)	3752	
		ARGUS	3753	
		UNDEFINED	3754 THROUGH 3762	
		AWT GENERAL	3763	
		UNDEFINED	3764	
		BASENTO	3765	
		FUZHOU (MODIFIED)	3766	
		KANGAN	3767	
		LEIZHOU (MODIFIED)	3768	
		LSIL	3769	
		MANYCH	3770	
		MINCIO	3771	
		PIAVE	3772	
		TEVERE	3773	
		ULUBAT	3774	
		VODA	3775	
		YW-83	3776	
		Z	3777	
		UNDEFINED	3778 THROUGH 3797	
		SERVICE CRAFT GENERAL	3798	
		BARGE, GENERAL	3799	
		YO GENERAL	3800	
		YOG GENERAL	3801	
		YHT GENERAL	3802	
		YRNS GENERAL	3803	
		YOS GENERAL	3804	
		YPK GENERAL	3805	
		YRR GENERAL	3806	
		YRB GENERAL	3807	
		YRST GENERAL	3808	
		YOM GENERAL	3809	
		YOSS GENERAL	3810	
		YW GENERAL	3811	
		UNDEFINED	3812 THROUGH 3827	
		YD GENERAL	3828	

FIELD CODING FOR J3.7C5

(SHEET 65)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		YM GENERAL	3829	
		YFD GENERAL	3830	
		YFP GENERAL	3831	
		YGT GENERAL	3832	
		YR GENERAL	3833	
		UNDEFINED	3834 THROUGH 3840	
		YFD GENERAL	3841	
		YFDB GENERAL	3842	
		YFDM GENERAL	3843	
		YFDL GENERAL	3844	
		UNDEFINED	3845 THROUGH 3850	
		YRD GENERAL	3851	
		YRDB GENERAL	3852	
		YRDM GENERAL	3853	
		YRDL GENERAL	3854	
		UNDEFINED	3855 THROUGH 3861	
		LIGHTER GENERAL	3862	
		YE GENERAL	3863	
		YF GENERAL	3864	
		YFC GENERAL	3865	
		YFR GENERAL	3866	
		YC GENERAL	3867	
		YFT GENERAL	3868	
		UNDEFINED	3869 THROUGH 3878	
		YT GENERAL	3879	
		YTB GENERAL	3880	
		YTM GENERAL	3881	
		YTL GENERAL	3882	
		UNDEFINED	3883 THROUGH 3892	
		YAGF GENERAL	3893	
		YAG GENERAL	3894	
		YV GENERAL	3895	
		YNG GENERAL	3896	
		YP GENERAL	3897	
		YFU GENERAL	3898	
		YAM GENERAL	3899	
		YNC GENERAL	3900	
		YLC GENERAL	3901	
		YVS GENERAL	3902	
		YRG GENERAL	3903	
		YAGT GENERAL	3904	
		YPT GENERAL	3905	

FIELD CODING FOR J3.7C5

(SHEET 66)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		YRC GENERAL	3906	
		YDT GENERAL	3907	
		YNT GENERAL	3908	
		YH GENERAL	3909	
		YFB GENERAL	3910	
		YTR GENERAL	3911	
		YFL GENERAL	3912	
		YAC GENERAL	3913	
		YSR GENERAL	3914	
		YSG GENERAL	3915	
		YDG GENERAL	3916	
		KHABAROV	3917	
		UNDEFINED	3918 THROUGH 3936	
		TM GENERAL	3937	
		TMD GENERAL	3938	
		TMB GENERAL	3939	
		TMK GENERAL	3940	
		TMF GENERAL	3941	
		TMC GENERAL	3942	
		TMCS GENERAL	3943	
		TMWW GENERAL	3944	
		TMA GENERAL	3945	
		TMH GENERAL	3946	
		TMGB GENERAL	3947	
		TMI GENERAL	3948	
		TML GENERAL	3949	
		TMOT GENERAL	3950	
		TMM GENERAL	3951	
		TMP GENERAL	3952	
		TMFR GENERAL	3953	
		TMR GENERAL	3954	
		TMOR GENERAL	3955	
		TMOL GENERAL	3956	
		TME GENERAL	3957	
		TMGS GENERAL	3958	
		TMLS GENERAL	3959	
		TMS GENERAL	3960	
		TMOS GENERAL	3961	
		TMO GENERAL	3962	
		TMX GENERAL	3963	
		TMWT GENERAL	3964	
		UNDEFINED	3965 THROUGH 3989	

FIELD CODING FOR J3.7C5

(SHEET 67)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		TMT GENERAL	3990	
		TMTR GENERAL	3991	
		TMTS GENERAL	3992	
		UNDEFINED	3993 THROUGH 4002	
		TU GENERAL	4003	
		TUF GENERAL	4004	
		TUB GENERAL	4005	
		TUI GENERAL	4006	
		TUR GENERAL	4007	
		TUT GENERAL	4008	
		TUS GENERAL	4009	
		TUC GENERAL	4010	
		TUW GENERAL	4011	
		UNDEFINED	4012 THROUGH 4023	
		TJ GENERAL	4024	
		TJF GENERAL	4025	
		TJC GENERAL	4026	
		TJCS GENERAL	4027	
		TJGB GENERAL	4028	
		UNDEFINED	4029 THROUGH 4038	
		TS GENERAL	4039	
		TSG GENERAL	4040	
		TSR GENERAL	4041	
		UNDEFINED	4042 THROUGH 4052	
		MPS GENERAL	4053	
		UNDEFINED	4054 THROUGH 4069	
		SURFACE SPECIFIC TYPE	4070 THROUGH 4094	
		1-25		
		RESET TO NO STATEMENT	4095	

809	001	SUBSURFACE (MARITIME) SPECIFIC TYPE		THE SPECIFIC TYPE OF POINT OR TRACK WITH AN ENVIRONMENT/CATEGORY OF SUBSURFACE (MARITIME).

		NO STATEMENT	0	
		SS GENERAL	1	
		ABTAO SS	2	
		DISUSED	3	
		DISUSED	4	
		UNDEFINED	5	
		DISUSED	6	
		GUPPY II SS	7	
		GUPPY IIA SS	8	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
809	001	SUBSURFACE (MARITIME) SPECIFIC (CONTINUED) TYPE		

		GUPPY III SS	9	
		HAI LUNG SS	10	
		DISUSED	11	
		SAURO (TYPE 1081) SS	12	
		SAURO (IMPROVED) SS	13	
		TANG SS	14	
		TYPE SNA 72 SS	15	
		UZUSHIO SS	16	
		WALRUS SS	17	
		YUUSHIO SS	18	
		UNDEFINED	19	
		DISUSED	20	
		PELOSI SS	21	
		UNDEFINED	22 THROUGH 360	
		SSB GENERAL	361	
		GOLF SSB	362	
		GOLF II SSB	363	
		GOLF III SSB	364	
		GOLF V SSB	365	
		UNDEFINED	366 THROUGH 440	
		SSBN GENERAL	441	
		BENJAMIN FRANKLIN SSBN	442	
		DELTA I SSBN	443	
		DELTA II SSBN	444	
		DELTA III SSBN	445	
		DELTA IV SSBN	446	
		HOTEL III SSBN	447	
		DISUSED	448	
		L'INFLEXIBLE SSBN	449	
		DISUSED	450	
		UNDEFINED	451	
		OHIO SSBN	452	
		RESOLUTION SSBN	453	
		TYPHOON SSBN	454	
		VANGUARD SSBN	455	
		YANKEE SSBN	456	
		YANKEE I SSBN	457	
		YANKEE II SSBN	458	
		XIA SSBN	459	
		LE TERRIBLE SSBN	460	
		UNDEFINED	461 THROUGH 720	
		SSN GENERAL	721	

FIELD CODING FOR J3.7C5

(SHEET 69)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
809	001	SUBSURFACE (MARITIME) SPECIFIC (CONTINUED)		
		TYPE		

		AKULA SSN	722	
		ALFA SSN	723	
		AMATHEPT SSN	724	
		CHARLIE/VICTOR SSGN/SSN	725	
		CHURCHILL SSN	726	
		ECHO/NOVEMBER SSGN/SSN	727	
		DISUSED	728	
		DISUSED	729	
		HAN SSN	730	
		HOTEL SSN	731	
		LOS ANGELES SSN	732	
		MIKE SSN	733	
		NARWHAL SSN	734	
		DISUSED	735	
		RUBIS SSN	736	
		SEAWOLF SSN	737	
		SIERRA SSN	738	
		DISUSED	739	
		DISUSED	740	
		STURGEON SSN	741	
		SWIFTSURE SSN	742	
		TRAFALGAR SSN	743	
		DISUSED	744	
		VICTOR I SSN	745	
		VICTOR II SSN	746	
		VICTOR III SSN	747	
		YANKEE SSN	748	
		VIRGINIA SSN	749	
		UNDEFINED	750 THROUGH 1200	
		SSG GENERAL	1201	
		JULIETT SSG	1202	
		UNDEFINED	1203 THROUGH 1245	
		SSGN GENERAL	1246	
		CHARLIE I SSGN	1247	
		CHARLIE II SSGN	1248	
		ECHO II SSGN	1249	
		OSCAR SSGN	1250	
		PAPA SSGN	1251	
		UNDEFINED	1252 THROUGH 1345	
		SSK GENERAL	1346	
		AGOSTA SSK	1347	
		UNDEFINED	1348	

5.1-932

MIL-STD-6016B

FIELD CODING FOR J3.7C5

(SHEET 70)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
809	001	SUBSURFACE (MARITIME) SPECIFIC (CONTINUED)		
		TYPE		

		FOXTROT SSK	1349	
		HEROJ SSK	1350	
		KILO SSK	1351	
		MING SSK	1352	
		NARVAL SSK	1353	
		DISUSED	1354 THROUGH 1355	
		ROMEO SSK	1356	
		SAVA SSK	1357	
		SUTJESKA SSK	1358	
		TANGO SSK	1359	
		UPHOLDER SSK	1360	
		WHISKEY SSK	1361	
		WHISKEY V SSK	1362	
		ZULU IV SSK	1363	
		DORIS SSK	1364	
		VICTORIA SSK	1365	
		TYPE 212 SSK	1366	
		UNDEFINED	1367 THROUGH 1665	
		SSC GENERAL	1666	
		DELFINEN SSC	1667	
		DRAKEN SSC	1668	
		NAECKEN SSC	1669	
		NARHVALEN SSC	1670	
		SJOORMEN SSC	1671	
		TOTI TYPE 1075 SSC	1672	
		TYPE 205 SSC	1673	
		TYPE 206 SSC	1674	
		KOBHEN SSC	1675	
		TYPE 209 (TYPE 1100) SSC	1676	
		TYPE 209 (TYPE 1200) SSC	1677	
		TYPE 209 (TYPE 1300) SSC	1678	
		TYPE 209 (TYPE 1400) SSC	1679	
		TYPE 209 (TYPE 1500) SSC	1680	
		ULA SSC	1681	
		TYPE 211 SSC	1682	
		VASTERGOETLAND SSC	1683	
		TYPE 206A SSC	1684	
		UNDEFINED	1685 THROUGH 1945	
		SSA GENERAL	1946	
		BRAVO SSA	1947	
		DOLPHIN (AGSS) SSA	1948	
		GOLF I SSA	1949	

5.1-933

MIL-STD-6016B

FIELD CODING FOR J3.7C5

(SHEET 71)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

809	001	SUBSURFACE (MARITIME) SPECIFIC (CONTINUED) TYPE		
-----	-----	--	--	--

GOLF I (MODIFIED) SSA	1950
GOLF II SSA	1951
INDIA SSA	1952
LIMA SSA	1953
ROMEO SSA	1954
ZULU SSA	1955
UNDEFINED	1956 THROUGH 4069
SUBSURFACE SPECIFIC TYPE 1-25	4070 THROUGH 4094
RESET TO NO STATEMENT	4095

810	001	LAND (GROUND) SPECIFIC TYPE		
-----	-----	-----------------------------	--	--

THE SPECIFIC TYPE OF POINT OR TRACK
WITH AN ENVIRONMENT/CATEGORY OF
LAND (GROUND).

NO STATEMENT	0
TOW	1
DRAGON	2
LANCE	3
SHILLEAGH	4
SERGEANT	5
AMMUNITION	6
POL	7
OBSERVATION POSTS	8
RADIO DIRECTION FINDER	9
RIVER	10
STREAM	11
LAKE	12
MARSH/SWAMP	13
MOUNTAIN	14
HILLTOP	15
RIDGE	16
DEPRESSION	17
VALLEY	18
CAVE	19
BRIDGE	20
DAM	21
BUILDING	22
VILLAGE	23
TOWN	24
ROAD INTERSECTION	25
HOSPITAL	26
HAWK	27

5.1-934

MIL-STD-6016B

FIELD CODING FOR J3.7C5

(SHEET 72)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE -----	(CONTINUED)	
		I-HAWK	28	
		PATRIOT	29	
		NIKE	30	
		REDEYE	31	
		STINKER	32	
		HELLFIRE	33	
		PERSHING	34	
		JEEP	35	
		CAR	36	
		MOTORCYCLE	37	
		BICYCLE	38	
		AMPHIBIOUS VEHICLE	39	
		RIVER CROSSING EQUIPMENT	40	
		MECHANIZED MINE SWEEPER	41	
		MOBILE RADAR	42	
		SMOKE GENERATOR	43	
		(SSSB) SHIP SHORE SHIP BUFFER	44	
		(RADIL) ROCC AWACS	45	
		DIGITAL INTERFACE LINK		
		(ASIT) ADAPTABLE SURFACE	46	
		INTERFACE TERMINAL		
		(AEGIS) AEW GROUND	47	
		INTERFACE SEGMENT		
		AMBULANCE	48	
		BIOLOGICAL WEAPONS	49	
		CHEMICAL WEAPONS	50	
		NUCLEAR WEAPONS	51	
		ENGINEER VEHICLES	52	
		GENERATOR	53	
		JAMMERS	54	
		MAINTENANCE VEHICLE	55	
		MULTIPLE ROCKET LAUNCHER	56	
		RADIO	57	
		REMOTE SENSOR	58	
		SELF PROPELLED ARTILLERY	59	
		TACTICAL BRIDGE	60	
		TOWED ARTILLERY GUN	61	
		RECOILLESS RIFLE	62	
		(TACCP) TACTICAL COMMAND POST	63	
		BRIGADE	64	
		CORPS	65	

5.1-935

MIL-STD-6016B

FIELD CODING FOR J3.7C5

(SHEET 73)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE -----	(CONTINUED)	
		GROUP	66	
		DIVISION	67	
		REGIMENT	68	
		BATTALION	69	
		COMPANY	70	
		PLATOON	71	
		SQUADRON	72	
		AIRBASE	73	
		WING	74	
		ANTI-AIRCRAFT GUN	75	
		AIR DEFENSE ARTILLERY GUN	76	
		MORTAR	77	
		FLAMETHROWER	78	
		TSC/MOCC/MARITIME HEADQUARTERS	79	
		MAIN BATTLE TANK	80	
		MEDIUM TANK	81	
		LIGHT TANK	82	
		TRAIN	83	
		ARMORED PERSONNEL VEHICLE	84	
		ARMORED INFANTRY FIGHTING VEHICLE	85	
		LIGHT TRUCK	86	
		MEDIUM TRUCK	87	
		HEAVY TRUCK	88	
		TANK TRANSPORTER	89	
		DUMMY	90	
		TRAP	91	
		POINT TARGET	92	
		EA SITE	93	
		ARMORED PERSONNEL CARRIER	94	
		ARMORED INFANTRY FIGHTING VEHICLE	95	
		GCI SITE	96	
		CRC	97	
		TACC (AF)	98	
		CRP	99	
		TACC (MC)	100	
		MPC	101	
		TAOC	102	

FIELD CODING FOR J3.7C5

(SHEET 74)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		AADCCS (AN/TSQ-73)	103	
		DASC	104	
		FACP	105	
		FASC	106	
		AADCP	107	
		ASRT	108	
		NCC	109	
		RCC	110	
		ROCC	111	
		DC	112	
		WOC	113	
		(ASOC) AIR SUPPORT	114	
		OPERATIONS CENTER		
		(TCO) TACTICAL COMBAT	115	
		OPERATIONS CENTER		
		(TOC) TACTICAL	116	
		OPERATIONS CENTER		
		(ARMY)		
		CHAPPARAL	117	
		FIRE DIRECTION CENTER	118	
		FIRE UNIT	119	
		DIVARTY	120	
		BATTERY	121	
		SELF-PROPELLED ARTILLERY	122	
		(GOC) GROUND OPERATIONS	123	
		CENTER		
		(ICC) INFORMATION	124	
		COORDINATION CENTER		
		(BOC) BATTERY OPERATIONS	125	
		CENTER		
		(ECS) ENGAGEMENT CONTROL	126	
		STATION		
		(PCP) PLATOON COMMAND	127	
		POST		
		(CRG) COMMUNICATIONS	128	
		RELAY GROUP		
		TUNNELS	129	
		RAILYARDS	130	
		BENCHMARK	131	
		TROOP	132	
		LANDING ZONE	133	
		DROP ZONE	134	
		ASSEMBLY OR STAGING AREA	135	

FIELD CODING FOR J3.7C5

(SHEET 75)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		DECONTAMINATION SITE	136	
		RE-ENTRY POINT/LINE	137	
		CROSSING AREA FOR		
		RECON PATROLS		
		SAM	138	
		SSM	139	
		ANTI-TANK WEAPON	140	
		DIRECT SUPPORT	141	
		GENERAL SUPPORT	142	
		INTERCEPTION	143	
		BLOCKING	144	
		REINFORCING	145	
		REDEPLOYMENT	146	
		POLICING	147	
		INTRUDING	148	
		PREPARING BARRIER	149	
		DUMPING EQUIPMENT	150	
		RELIEF	151	
		CONVOY	152	
		ANTI-AIRCRAFT	153	
		AIR DEFENSE ARTILLERY	154	
		ARTILLERY	155	
		SURVEILLANCE	156	
		PICKETING	157	
		LOGISTICS SUPPORT	158	
		SEARCH	159	
		DIRECT ARTILLERY SUPPORT	160	
		GENERAL ARTILLERY	161	
		SUPPORT		
		MAINTAINING LINE OF	162	
		COMMUNICATION		
		COMMITTING	163	
		COUNTER-ATTACK	164	
		ELECTRONIC WARFARE	165	
		THREATEN	166	
		DESTROY	167	
		CONTACT	168	
		EVALUATION	169	
		TRANSPORTER	170	
		ARMORED VEHICLE	171	
		GUN	172	
		HALF TRACK	173	
		COMMUNICATIONS EQUIPMENT	174	

5.1-938

MIL-STD-6016B

FIELD CODING FOR J3.7C5

(SHEET 76)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		TARGET	175	
		AIR DEFENSE SITE	176	
		FIM-92 STINGER	177	
		NIM-23 HAWK	178	
		MIM-42 REDEYE	179	
		MIM-72 CHAPARRAL	180	
		MIM-104 PATRIOT	181	
		RIM-2 TERRIER	182	
		RIM-7 SEA SPARROW	183	
		RIM-8 TALOS	184	
		RIM-24 TARTAR	185	
		RIM-66 STANDARD MISSILE	186	
		RIM-67 STANDARD MISSILE	187	
		BLOWPIPE	188	
		DISUSED	189 THROUGH 190	
		SEA DART	191	
		DISUSED	192 THROUGH 193	
		CROTALE	194	
		RAPIER	195	
		RBS-70/GIRAFFE	196	
		SAM BLOODHOUND	197	
		SAM ROLAND	198	
		SA-2 GUIDELINE	199	
		SA-3 GOA	200	
		SA-4 GANEF	201	
		SA-N-3 GOBLET	202	
		SA-5 GAMMON	203	
		SA-N-4 GECKO	204	
		SA-6 GAINFUL	205	
		SA-N-6 GRUMBLE	206	
		SA-7 GRAIL	207	
		SA-8 GECKO	208	
		SA-9 GASKIN	209	
		SA-10 GRUMBLE	210	
		SA-11 GADFLY	211	
		SA-12	212	
		SA-13 GOPHER	213	
		MISTRAL	214	
		SA-N-7 GADFLY	215	
		SA-N-8 GREMLIN	216	
		SA-14 GREMLIN	217	
		SA-16 GIMLET	218	
		SA-X-17	219	

5.1-939

MIL-STD-6016B

FIELD CODING FOR J3.7C5

(SHEET 77)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE -----	(CONTINUED)	
		TOC (THAAD)	220	
		SSI (THAAD)	221	
		LCS (THAAD)	222	
		LAUNCHER (THAAD)	223	
		TMD-GBR (THAAD)	224	
		JTAGS	225	
		ADTOC/BN	226	
		ADTOC/BDE	227	
		ADCP	228	
		SM-2 BLOCK II	229	
		SM-2 BLOCK III	230	
		SM-2 BLOCK IIIA	231	
		SM-2 BLOCK IIIB	232	
		SM-2 BLOCK IV	233	
		SM-2 BLOCK IVA	234	
		SM-3 LEAP	235	
		SA-N-5 GRAIL	236	
		SA-N-11 GRISOM	237	
		SA-12A GLADIATOR	238	
		SA-12B GIANT	239	
		SA-14 GREMLIN	240	
		SA-15 GAUNTLET	241	
		SA-17 GRIZZLY	242	
		SA-N-12 GRIZZLY	243	
		SA-18 GROUSE	244	
		SA-19 GRISOM	245	
		RIM-116 RAM	246	
		ADATS	247	
		JAVELIN	248	
		STARBURST	249	
		STARSTREAK	250	
		ASPIDER	251	
		FRONT DOOR	252	
		ROLAND II	253	
		AKASH	254	
		ANZA	255	
		ANZA II	256	
		CSA-1	257	
		CSA-2	258	
		CSA-4	259	
		CSA-5	260	
		FM-80	261	
		HN-5	262	

FIELD CODING FOR J3.7C5

(SHEET 78)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		NK-7	263	
		NK-16	264	
		PANTZYR	265	
		RAPIER 2000/JERNAS	266	
		RBS-90	267	
		SAKR	268	
		SAVA	269	
		SHANINE	270	
		SKYGUARD ASPIDE	271	
		SPADA	272	
		TAM SAM	273	
		TIGERCAT	274	
		VANGUARD	275	
		SA-N-1 GOA	276	
		SA-N-9 GAUNTLET	277	
		SA-N-10	278	
		ALBATROS/ASPIDE	279	
		SM-1	280	
		SA-2 IRAQ MOD	281	
		SA-2 NORTH KOREA RO	282	
		AEGIS-TI	283	
		MASURGS	284	
		ROCK CAKE	285	
		SEA INDIGO	286	
		TANSAM	287	
		TOKEN A/D	288	
		GUARDSMAN	289	
		SILKWORM	290	
		SNOW DRIFT 11/17	291	
		TIGER S	292	
		TIGER G	293	
		TUBE ARM SA-11	294	
		SEACAT 262/903/904	295	
		AN/MPQ-4	296	
		AN-TPQ-36	297	
		AN/TPS-25	298	
		CYMBERLINE	299	
		PORK TROUGH 1	300	
		RASIT	301	
		SNAR-6	302	
		TALL MIKE	303	
		AN/FPN-33/36/40	304	
		AN/TPN-12/17	305	

FIELD CODING FOR J3.7C5

(SHEET 79)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE -----	(CONTINUED)	
		CPN-4, FPN-16/22	306	
		RP-2E	307	
		RP-4G	308	
		THD-1010/1013	309	
		TPN-8/14/18TSQ-7	310	
		TWO SPOT	311	
		CSA-X-2	312	
		ASR-0	313	
		FALCON-G	314	
		MARCON LN66TPS66	315	
		SHEET BEND	316	
		WALL RUST A/B	317	
		DON-2	318	
		DONKAY/PALM FROND	319	
		EYE SHIELD	320	
		MARELD	321	
		PEEL PAIR	322	
		POT HEAD	323	
		RACAL-DECCA	324	
		RICE FIELD	325	
		RICE SCREEN	326	
		RICE CUP	327	
		SQUARE TIE	328	
		SS-N-2	329	
		STRUT CURVE	330	
		STRUT PAIR	331	
		BOFI	332	
		CORN CAN	333	
		DRUM TILT	334	
		ELDORADO	335	
		FLAP WHEEL	336	
		FLEDERMAUS	337	
		FLYCATCHER	338	
		GEPARD	339	
		GUN DISH	340	
		SPAAMG	341	
		TEAMPLAY	342	
		TEAMWORK	343	
		VULCAN	344	
		9LV 200	345	
		AN/SPG-50	346	
		BASS TILT	347	
		GOALKEEPER	348	

5.1-942

MIL-STD-6016B

FIELD CODING FOR J3.7C5

(SHEET 80)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		HAWK SCREECH	349	
		KITE SCREECH A/B	350	
		OWL SCREECH	351	
		MARK 68 FCS	352	
		MK 57/63 GFCS	353	
		MK-86 GFCS	354	
		MUFF COB	355	
		SIGNAAL STIR 180	356	
		SUN VISOR	357	
		TOP BOW	358	
		TYPE 341	359	
		VEGA	360	
		WM-20 SERIES	361	
		MARCONI S613	362	
		THIN SKIN	363	
		AN/FPS-77	364	
		MRL-1	365	
		MRL-4/5	366	
		BIG BIRD	367	
		SIDE NET	368	
		ODD LOT/PAIR/GROUP	369	
		FIRE WHEEL/MOD	370	
		BARLOCK	371	
		FIRECAN/WHIFF	372	
		GIN SLING	373	
		FRUSKA GORA	374	
		TIN SHIELD	375	
		BIG BAR/MESH	376	
		SS-N-S SCOOP PAIR	377	
		SGR-105 DA-01/00	378	
		CROSS SLOT	379	
		BACK NET/TRAP	380	
		GATE POLE/HIGH/POST	381	
		TOP LOT	382	
		RICE CAKE	383	
		JY-14/9	384	
		TIN TRAP	385	
		HEAD NET A/B/C	386	
		SLIM/SEA/HAIR NET	387	
		LOW SIEVE	388	
		EGG CUP	389	
		CUT WEB	390	
		SKYWATCH	391	

5.1-943

MIL-STD-6016B

FIELD CODING FOR J3.7C5

(SHEET 81)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE -----	(CONTINUED)	
		HALF PLATE	392	
		SKIN HEAD	393	
		SIEVE FAMILY	394	
		SO-A	395	
		HIGH SHELL	396	
		AN/FPS-6/89	397	
		DECCA HF200	398	
		MARCONI 5244	399	
		TYPE 88 MK 1	400	
		MARCONI S-247	401	
		AN/MPN-11	402	
		RAT-31S	403	
		AA4 MK 6/7	404	
		AN/TPS-43	405	
		SCR-584	406	
		AN/TPS-48	407	
		MARCONI S-1006/269	408	
		PALMIER	409	
		FIREFINDER LR	410	
		VOLEX III/IV	411	
		THD-1940	412	
		HADR (HR-3000)	413	
		AN/RPS-70/72/75	414	
		MPDR-18/S	415	
		WATCHMAN	416	
		MARCONI S-631/647	417	
		MARCONI S-706/711/712	418	
		AN/TPS-73	419	
		TRS-22XX	420	
		AN/SPS-8	421	
		DECCA AWS-1	422	
		MK-26	423	
		AN/SPS-48	424	
		RAN-7S	425	
		SEA TIGER	426	
		DA-08/2LS	427	
		AWS-9 (TYPE 996)	428	
		DA-05/00	429	
		MPDR-45	430	
		TOP STEER/PLATE	431	
		STRIKE OUT	432	
		SPONGE CAKE	433	
		NC1 ROLAND	434	

5.1-944

MIL-STD-6016B

FIELD CODING FOR J3.7C5 (SHEET 82)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		NC1 MISTRAL	435	
		FDOC	436	
		MCT	437	
		CETAC	438	
		ISARD	439	
		UNDEFINED	440 THROUGH 4000	
		WAYPOINT	4001	
		STRIKE INITIAL POINT	4002	
		UNDEFINED	4003 THROUGH 4093	
		RESET TO NO STATEMENT	4094	
		UNDEFINED	4095	

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

TABLE J5-1. J5 Antisubmarine Warfare Word Applicability Table

INITIAL WORD	SUBLABEL							
				J5.4I ACOUSTIC BEARING/RANGE				
EXTENSION WORD - 0				J5.4E0				
CONTINUATION WORD - 0								
1				J5.4C1 ACOUSTIC BEARING/RANGE WORD 1				
2				J5.4C2 ACOUSTIC BEARING/RANGE WORD 2				
...								
...								
...								
...								
...								
...								
31								

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

J5.4 MESSAGE SUMMARY

PURPOSE

The J5.4 Acoustic Bearing/Range Message is used to report acoustic bearing and range of subsurface (maritime) contacts.

DATA ELEMENT SUMMARY

<u>J5.4I</u>		<u>J5.4C1 (Continued)</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	SPARE	1
LABEL, J-SERIES	5	RANGE ACCURACY, ASW	4
SUBLABEL, J-SERIES	3	RANGE	11
MESSAGE LENGTH INDICATOR	3	SENSOR INDICATOR	3
EXERCISE INDICATOR	1	BEARING ACCURACY, ASW	4
PPLI TRACK NUMBER AND IDENTITY INDICATOR	1	SPARE	1
FORCE TELL INDICATOR	1	<u>J5.4C2</u>	
EMERGENCY INDICATOR	1	DATA ELEMENT	# BITS
SPECIAL PROCESSING INDICATOR	1	WORD FORMAT	2
SIMULATION INDICATOR	1	CONTINUATION WORD LABEL	5
TRACK NUMBER, REFERENCE	19	DEPTH CONTACT	4
IDENTITY(3)*****		SUBSURFACE (MARITIME) PLATFORM	7
IDENTITY AMPLIFYING * DESCRIPTOR(3)*****	3	ACTIVITY	
SPARE	1	SPARE	7
CONFIDENCE LEVEL	5	DEPTH, ABOVE/BELOW LAYER (SENSOR)	2
SUBSURFACE (MARITIME) PLATFORM	6	DEPTH, SENSOR	7
MINUTE	6	TRACK NUMBER, ORIGIN	19
HOUR	5	SOUND PROPAGATION PATH	4
SPARE	1	SPARE	13
BEARING DRIFT	2		
AUDIO	1		
DOPPLER	2		

<u>J5.4E0</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LATITUDE, 0.0051 MINUTE	21
LONGITUDE, 0.0051 MINUTE	22
BEARING REPORT TYPE	2
FREQUENCY, SOURCE ACOUSTIC	15
BEARING 1, ASW	8

<u>J5.4C1</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
CONTINUATION WORD LABEL	5
FREQUENCY, ASSOCIATED ACOUSTIC 1	15
FREQUENCY, ASSOCIATED ACOUSTIC 2	15
BEARING 2, ASW	8
BROADBAND	1

MIL-STD-6016B

J5.4 TRANSMIT/RECEIVE RULES

TITLE: Acoustic Bearing/Range Message

TRANSMIT RULES

1. The J5.4B Acoustic Bearing/Range basic message consists of the J5.4I word and the J5.4E0 word. The J5.4B basic message shall be transmitted once:

a. When initiated.

b. Periodically at a RRN = 4 (48 seconds, 36-60 second interval), or at an RRN = 6 (12 seconds, 8-20 second interval) if J5.4I Subsurface (Maritime) Platform = 20, Torpedo.

c. When requested by a J7.1 (ACT = 1) Data Update Request by Track Number message containing either the Reference TN or Origin TN being reported in a J5.4 message.

d. When any data field changes from No Statement in the J5.4 message.

e. When reinitiated by operator action.

2. When data are available in the J5.4C1 and/or J5.4C2 words, the applicable continuation words shall be transmitted with the J5.4B basic message.

RECEIVE RULES

There are no receive rules specified for this message.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD TITLE: ACOUSTIC BEARING/RANGE INITIAL WORD

24	23	22	21	20	19:	18:	17:	16:	15:	14:	13:	12	11	10:	09	08	07:	06	05	04	03	02:	01	00:	
					:SIM:		:EMG:FT		:PP		:EX		:MESSAGE		:SUBLABEL,						:WORD		:		
<---					:IND:SPI:		:IND:IND:		:T/I:IND:		:LENGTH		:J-SERIES		:LABEL,		:J-SERIES		:FORMAT		:				
					:	:	:	:	:	:	:	:INDICATOR		:	:	:	:	:	:	:	:	:	:		
					:	1	:	1	:	1	:	1	:	1	:	1	:	3	:	3	:	5	:	2	:

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
			:					:	:	IDENTITY		:												
<---			:	CONFIDENCE LEVEL				:	SP	:	-----		:	TRACK NUMBER, REFERENCE										
			:					:	:	ID AMP		:												
			:					:	:	DESCR		:												
			:	5				:	1	:	3		:	19										

:	69	68:	67:	66	65:	64:	63	62	61	60	59:	58	57	56	55	54	53:	52	51	50
:	:	:	BEARING:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	SUBSURFACE	:
:	DOPPLER:	AUD:	DRIFT	:SP	:	:	:	:	HOUR	:	:	:	:	:	MINUTE	:	:	:	(MARITIME)	:
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	PLATFORM	:
:	2	:	1	:	2	:	1	:	:	5	:	:	:	:	6	:	:	:	:	6

WORD DESCRIPTION

WORD NUMBER: J5.4I

WORD TITLE: ACOUSTIC BEARING/RANGE INITIAL WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	00
270	004	LABEL, J-SERIES	2-	6 5	00101
271	005	SUBLABEL, J-SERIES	7-	9 3	100
800	001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
385	003	EXERCISE INDICATOR (EX IND)	13	1	
839	001	PPLI TRACK NUMBER AND IDENTITY INDICATOR (PP T/I)	14	1	
354	002	FORCE TELL INDICATOR (FT IND)	15	1	
355	002	EMERGENCY INDICATOR (EMG IND)	16	1	
292	002	SPECIAL PROCESSING INDICATOR (SPI)	17	1	
1604	001	SIMULATION INDICATOR (SIM IND)	18	1	
769	002	TRACK NUMBER, REFERENCE	19-	37 19	
376	007	IDENTITY	38-	40 3	
376	001	IDENTITY AMPLIFYING DESCRIPTOR (ID AMP DESCR)	38-	40 3	
756	001	SPARE (SP)	41	1	
358	001	CONFIDENCE LEVEL	42-	46 5	
1797	003	SUBSURFACE (MARITIME) PLATFORM	47-	52 6	
797	004	MINUTE	53-	58 6	
792	001	HOUR	59-	63 5	
756	001	SPARE (SP)	64	1	
360	001	BEARING DRIFT	65-	66 2	
361	001	AUDIO (AUD)	67	1	
370	001	DOPPLER	68-	69 2	

FIELD CODING FOR J5.4I

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
385	003	EXERCISE INDICATOR -----		INDICATES WHETHER OR NOT THE MESSAGE IDENTIFIES AN EXERCISE TRACK.
		NON-EXERCISE TRACK	0	
		EXERCISE TRACK OR UNIT	1	
839	001	PPLI TRACK NUMBER AND IDENTITY INDICATOR -----		INDICATES WHETHER OR NOT THE REF- ERENCE TN AND IDENTITY IN THIS MESSAGE WAS RECEIVED PREVIOUSLY IN A PPLI MESSAGE.
		NO STATEMENT	0	
		SOURCE OF TN AND IDENT- ITY IS FROM PPLI	1	INDICATES THAT THE REFERENCE TN AND IDENTITY IN THIS MESSAGE WAS RECEIVED IN A PPLI MESSAGE.
354	002	FORCE TELL INDICATOR -----		THIS INDICATOR CAUSES TRACK/POINT DATA TO BE FORCED THROUGH CONTROLLABLE RECEIVE FILTERS.
		NO STATEMENT	0	
		FORCE TELL STATUS	1	
355	002	EMERGENCY INDICATOR -----		USED TO INDICATE WHETHER OR NOT A UNIT OR TRACK HAS AN EMERGENCY.
		NO STATEMENT	0	
		EMERGENCY STATUS	1	
292	002	SPECIAL PROCESSING INDICATOR -----		INDICATES THAT A MESSAGE REQUIRES SPECIAL PROCESSING.
		SPECIAL PROCESSING NOT REQUIRED	0	
		SPECIAL PROCESSING REQUIRED	1	
1604	001	SIMULATION INDICATOR -----		INDICATES WHETHER THE TRACK REFER- ENCED IN THE MESSAGE IS A REAL OR A SIMULATED TRACK.
		REAL TRACK OR UNIT	0	
		SIMULATED TRACK OR UNIT	1	
769	002	TRACK NUMBER, REFERENCE -----		A REFERENCE NUMBER USED TO ASSOCIATE INFORMATION AND DIRECTIVES WITH THE TRACK. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH

5.1-954

MIL-STD-6016B

FIELD CODING FOR J5.4I (SHEET 2)				
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	

FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE-BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6
00111	7
01000	A
01001	B
01010	C
01011	D
01100	E
01101	F
01110	G
01111	H
10000	J
10001	K
10010	L
10011	M
10100	N

FIELD CODING FOR J5.4I			(SHEET 3)
DFI	DUI	DUI/DI NAME	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)
			10101 P
			10110 Q
			10111 R
			11000 S
			11001 T
			11010 U
			11011 V
			11100 W
			11101 X
			11110 Y
			11111 Z
		00000	0
		00001-00076	1 THROUGH 62
		00077	63
		00100-00175	64 THROUGH 125
		00176	126
		00177	127
		00200-07776	128 THROUGH 4094
		07777	4095
		0A000-0Z777	4096 THROUGH 16383
		10000-17777	16384 THROUGH 20479
		1A000-1Z777	20480 THROUGH 32767
		20000-27777	32768 THROUGH 36863
			NO STATEMENT.
			ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU). ILLEGAL.
			ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU). RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS. COLLECTIVE ADDRESS.
			ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
			ILLEGAL.
			ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
			ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
			ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
			ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G.,

			FIELD CODING FOR J5.4I	(SHEET 4)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		2A000-2Z777	36864 THROUGH 49151	TRACKS AND REFERENCE POINTS. ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		70000-77776	114688 THROUGH 118782	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO

			FIELD CODING FOR J5.4I	(SHEET 5)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		77777	118783	C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS. ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
376	007	IDENTITY -----		EXPRESSES THE STANDARD IDENTITY OF A TRACK.
		PENDING	0	A TRACK WHICH HAS NOT BEEN SUBJECTED TO THE IDENTIFICATION PROCESS.
		UNKNOWN	1	AN EVALUATED TRACK WHICH HAS NOT BEEN IDENTIFIED.
		ASSUMED FRIEND	2	A TRACK WHICH IS ASSUMED TO BE A FRIEND BECAUSE OF ITS CHARACTERISTICS, BEHAVIOR, OR ORIGIN.
		FRIEND	3	A TRACK BELONGING TO A DECLARED FRIENDLY NATION.
		NEUTRAL	4	A TRACK WHOSE CHARACTERISTICS, BEHAVIOR, ORIGIN, OR NATIONALITY INDICATE THAT IT IS NEITHER SUPPORTING NOR OPPOSING FRIENDLY FORCES.
		SUSPECT	5	A TRACK WHICH IS POTENTIALLY HOSTILE BECAUSE OF ITS CHARACTERISTICS, BEHAVIOR, ORIGIN, OR NATIONALITY.
		HOSTILE	6	A TRACK DECLARED TO BELONG TO ANY OPPOSING NATION, PARTY, GROUP, OR ENTITY, WHICH BY VIRTUE OF ITS BEHAVIOR OR INFORMATION COLLECTED ON IT SUCH AS CHARACTERISTICS, ORIGIN OR NATIONALITY CONTRIBUTES TO THE THREAT TO FRIENDLY FORCES.
		UNDEFINED	7	
376	001	IDENTITY AMPLIFYING DESCRIPTOR -----		A DESCRIPTOR ADDING TO THE STANDARD IDENTITY OF A TRACK INVOLVED IN AN EXERCISE. THE STANDARD IDENTITY IS FRIEND.

FIELD CODING FOR J5.4I

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
376	001	IDENTITY AMPLIFYING DESCRIPTOR (CONTINUED) -----		
		EXERCISE PENDING	0	
		EXERCISE UNKNOWN	1	
		EXERCISE ASSUMED FRIEND	2	
		EXERCISE FRIEND	3	
		EXERCISE NEUTRAL	4	
		JOKER	5	
		FAKER	6	
		UNDEFINED	7	
358	001	CONFIDENCE LEVEL -----		EXPRESSES AN ASSESSMENT AS TO WHETHER CONTACTS ARE OF SUBMARINE ORIGIN WITH ADDED ASSESSMENT OF THE CONFIDENCE LEVEL.
		NO STATEMENT	0	
		UNCLASSIFIED	1	
		POSSIBLE SUBMARINE	2	
		LOW ONE		
		POSSIBLE SUBMARINE	3	
		LOW TWO		
		POSSIBLE SUBMARINE	4	
		HIGH THREE		
		POSSIBLE SUBMARINE	5	
		HIGH FOUR		
		PROBABLE SUBMARINE	6	
		CERTAIN SUBMARINE	7	
		NON SUBMARINE	8	
		SURFACE VESSEL	9	
		UNDEFINED	10 THROUGH 31	
1797	003	SUBSURFACE (MARITIME) PLATFORM -----		THE SUBSURFACE (MARITIME) PLATFORM FIELD ALONG WITH THE SUBSURFACE (MARITIME) PLATFORM ACTIVITY FIELD FURTHER DEFINES THE IDENTITY OF A SUBSURFACE (MARITIME) TRACK.
		NO STATEMENT	0	
		SUBMARINE PROPULSION	1	
		UNKNOWN		
		DIESEL ELECTRIC	2	
		SUBMARINE GENERAL		
		DIESEL ELECTRIC ATTACK	3	
		SUBMARINE		

5.1-959

MIL-STD-6016B

FIELD CODING FOR J5.4I

(SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1797	003	SUBSURFACE (MARITIME) PLATFORM (CONTINUED)		

		DIESEL ELECTRIC MISSILE	4	
		SUBMARINE		
		DIESEL ELECTRIC	5	
		BALLISTIC MISSILE		
		SUBMARINE		
		TYPE 1 DIESEL	6	
		TYPE 2 DIESEL	7	
		TYPE 3 DIESEL	8	
		NUCLEAR SUBMARINE	9	
		GENERAL		
		NUCLEAR ATTACK SUBMARINE	10	
		NUCLEAR MISSILE	11	
		SUBMARINE		
		NUCLEAR BALLISTIC	12	
		MISSILE SUBMARINE		
		TYPE I NUCLEAR	13	
		TYPE II NUCLEAR	14	
		TYPE III NUCLEAR	15	
		TYPE IV NUCLEAR	16	
		TYPE V NUCLEAR	17	
		NON-SUBMARINE	18	
		SURFACE VESSEL	19	
		TORPEDO	20	
		MINE	21	
		DECOY	22	
		WRECK	23	
		SEABED PIPELINE	24	
		FISH/MARINE LIFE	25	
		SWIMMER/FROGMAN	26	
		KNUCKLE/WAKE	27	
		ATTACK SUBMARINE	28	
		CRUISE MISSILE LAUNCHER	29	
		PINNACLE/SEAMOUNTAIN	30	
		NON-MILITARY	31	
		SUBMERSIBLE		
		UNDEFINED	32	
		TYPE VI NUCLEAR	33	
		TYPE VII NUCLEAR	34	
		CONVENTIONAL (COMMAND	35	
		AND CONTROL)		
		CONVENTIONAL (AUXILIARY)	36	
		NUCLEAR (COMMAND AND	37	
		CONTROL)		

FIELD CODING FOR J5.4I

(SHEET 8)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1797	003	SUBSURFACE (MARITIME) PLATFORM (CONTINUED)		

		UNDEFINED	38 THROUGH 48	
		MISSILE CONTROL UNIT	49	
		UNDEFINED	50 THROUGH 62	
		RESET TO NO STATEMENT	63	
797	004	MINUTE		THE MINUTE OF THE HOUR.

		0 THROUGH 59	0 THROUGH 59	IN ONE MINUTE INCREMENTS.
		ILLEGAL	60 THROUGH 62	
		NO STATEMENT	63	
792	001	HOUR		EXPRESSES TIME OF DAY OR A PERIOD OF
		----		TIME IN HOURS.
		0 HOUR	0	
		1 THROUGH 23 HOURS	1 THROUGH 23	IN ONE HOUR INCREMENTS.
		ILLEGAL	24 THROUGH 30	
		NO STATEMENT	31	
360	001	BEARING DRIFT		INDICATES THE DIRECTION OF CHANGE
		-----		(DRIFT) OF THE RESOLVED BEARING.
		NO STATEMENT	0	
		LEFT	1	
		RIGHT	2	
		STEADY	3	
361	001	AUDIO		EXPRESSES THE PRESENCE OF AN AUDIBLE
		-----		FREQUENCY.
		NO STATEMENT	0	
		AUDIO	1	
370	001	DOPPLER		EXPRESSES THE DOPPLER EFFECT OF THE
		-----		ACOUSTIC CONTACT.
		NO STATEMENT	0	
		NO DOPPLER	1	
		UP DOPPLER	2	
		DOWN DOPPLER	3	

5.1-961

MIL-STD-6016B

.....

WORD TITLE: ACOUSTIC BEARING/RANGE EXTENSION WORD

49	48	47:	46	45:	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25	
			:BEARING:																						
<---			:REPORT :		LONGITUDE, 0.0051 MINUTE																				
			: TYPE :																						
			:	2	:	22																			

:	69	68	67	66	65	64	63	62	:	61	60	59	58	57	56	55	54	53	52	51	50
:									:												
:	BEARING 1, ASW								:	FREQUENCY, SOURCE ACOUSTIC											
:									:												
:	8								:	15											

WORD DESCRIPTION

WORD NUMBER: J5.4E0
WORD TITLE: ACOUSTIC BEARING/RANGE EXTENSION WORD

REFERENCE DFI/DUI	DATA FIELD DESCRIPTOR	BIT #		RESOLUTION, CODING, ETC
		POSITION	BITS	
1550 001	WORD FORMAT	0-	1 2	10
281 014	LATITUDE, 0.0051 MINUTE	2-	22 21	
282 014	LONGITUDE, 0.0051 MINUTE	23-	44 22	
373 001	BEARING REPORT TYPE	45-	46 2	
417 020	FREQUENCY, SOURCE ACOUSTIC	47-	61 15	
372 021	BEARING 1, ASW	62-	69 8	

FIELD CODING FOR J5.4E0

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
281	014	LATITUDE, 0.0051 MINUTE ----- 0 DEGREES +90/1,048,575 THROUGH +90 DEGREES NORTH NO STATEMENT -90 THROUGH -90/1,048,575 DEGREES SOUTH	0 1 THROUGH 1048575 1048576 1048577 THROUGH 2097151	THE PRECISION IS APPROXIMATELY 31 FEET. IN 90/1,048,575 DEGREE INCREMENTS.
282	014	LONGITUDE, 0.0051 MINUTE ----- 0 DEGREES +180/2,097,151 THROUGH +180 DEGREES EAST NO STATEMENT -180 THROUGH -180/2,097,151 DEGREES WEST	0 1 THROUGH 2097151 2097152 2097153 THROUGH 4194303	THE PRECISION IS APPROXIMATELY 31 FEET. IN 180/2,097,151 DEGREE INCREMENTS.
373	001	BEARING REPORT TYPE ----- BEARING AND RANGE PASSIVE BEARING (AMBIGUOUS) PASSIVE BEARING (RESOLVED) RANGE ONLY	0 1 2 3	REPORTS TYPE OF SENSOR FROM WHICH THAT BEARING WAS OBTAINED AND INDICATES WHETHER BEARING IS AMBIGUOUS OR RESOLVED.
417	020	FREQUENCY, SOURCE ACOUSTIC ----- NO STATEMENT .125 HZ THROUGH 4095.875 HZ	0 1 THROUGH 32767	EXPRESSES THE FREQUENCY OF THE REPORTED ACOUSTIC CONTACT. IN .125 HZ INCREMENTS.
372	021	BEARING 1, ASW -----		BEARING IS FROM THE ORIGIN OF THE SENSOR TO THE CONTACT REFERENCED TO TRUE NORTH IN APPROXIMATELY 1.4 DEGREE INCREMENTS. THIS FIELD IS INTERPRETED AS FOLLOWS: A. WHEN THE J5.4 MESSAGE REPORTS

DFI	DUI	DUI/DI NAME
372	021	BEARING 1, ASW

DI BIT CODE
(CONTINUED)

DUI/DI EXPLANATION

AN ACTIVE BEARING (BRT=0) OR A RESOLVED PASSIVE BEARING (BRT=2), THE ASW BEARING 1 FIELD REPORTS THE SINGLE BEARING THAT IS THE SUBJECT OF THE MESSAGE. ASW BEARING 2 WILL NOT BE USED FOR THESE BEARING TYPES.

B. WHEN THE J5.4 MESSAGE REPORTS AMBIGUOUS PASSIVE BEARINGS (BRT=1), THE ASW BEARING 1 AND ASW BEARING 2 FIELDS EACH REPORT A BEARING SIMULTANEOUSLY.

C. WHEN THE J5.4 BEARING REPORT TYPE IS SET TO NO STATEMENT (BRT=3), THE ASW BEARING 1 WILL NOT BE INTERPRETED.

0 THROUGH 358 19/32
DEGREES

0 THROUGH 255

.....

WORD TITLE: ACOUSTIC BEARING/RANGE CONTINUATION WORD 1

24	23	22:	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07:	06	05	04	03	02:	01	00:			
<---			:	FREQUENCY, ASSOCIATED ACOUSTIC 1															:	CONTINUATION WORD					:	WORD	:
			:																:	LABEL					:	FORMAT	:
			:																:						:		:
			:	15															:	5					:	2	:

49	48	47:	46:	45:	44	43	42	41	40	39	38	37:	36	35	34	33	32	31	30	29	28	27	26	25		
RANGE		:	:	BRD:									:													
ACCURACY,		:SP	:BND:	BEARING 2, ASW								:	FREQUENCY, ASSOCIATED ACOUSTIC 2													
ASW		:	:	:									:													
4		:	1	: 1	:	8								:	15											

:	69:	68	67	66	65:	64	63	62:	61	60	59	58	57	56	55	54	53	52	51:	50			
:	:	BEARING				:	SENSOR				:											:	
:	SP	ACCURACY, ASW				:	INDICATOR				:	RANGE										:--->	
:	:					:					:											:	
:	1	:	4				:	3				:	11										:

WORD DESCRIPTION

WORD NUMBER: J5.4C1

WORD TITLE: ACOUSTIC BEARING/RANGE CONTINUATION WORD 1

REFERENCE			BIT	#	
DFI/DUI	DATA	FIELD	POSITION	BITS	RESOLUTION, CODING, ETC
	DESCRIPTOR				
1550 001	WORD	FORMAT	0-	1 2	01
1551 001	CONTINUATION	WORD LABEL	2-	6 5	00001
417 021	FREQUENCY,	ASSOCIATED ACOUSTIC	7-	21 15	
	1				
417 022	FREQUENCY,	ASSOCIATED ACOUSTIC	22-	36 15	
	2				
372 022	BEARING 2,	ASW	37-	44 8	
374 001	BROADBAND	(BRD BND)	45	1	
756 001	SPARE	(SP)	46	1	
375 001	RANGE	ACCURACY, ASW	47-	50 4	
757 016	RANGE		51-	61 11	
359 002	SENSOR	INDICATOR	62-	64 3	
372 024	BEARING	ACCURACY, ASW	65-	68 4	
756 001	SPARE	(SP)	69	1	

FIELD CODING FOR J5.4C1

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
417	021	FREQUENCY, ASSOCIATED ACOUSTIC 1 ----- NO STATEMENT .125 HZ THROUGH 4095.875 HZ	0 1 THROUGH 32767	EXPRESSES AN ASSOCIATED FREQUENCY OF THE REPORTED ACOUSTIC CONTACT. IN .125 HZ INCREMENTS.
417	022	FREQUENCY, ASSOCIATED ACOUSTIC 2 ----- NO STATEMENT .125 HZ THROUGH 4095.875 HZ	0 1 THROUGH 32767	EXPRESSES AN ASSOCIATED FREQUENCY OF THE REPORTED ACOUSTIC CONTACT. IN .125 HZ INCREMENTS.
372	022	BEARING 2, ASW ----- 0 THROUGH 358 19/32 DEGREES	0 THROUGH 255	BEARING IS FROM THE ORIGIN OF THE SENSOR TO THE CONTACT REFERENCED TO TRUE NORTH IN APPROXIMATELY 1.4 DEGREE INCREMENTS. THIS FIELD IS INTERPRETED AS FOLLOWS: A. WHEN THE J5.4 MESSAGE REPORTS AN ACTIVE BEARING (BRT=0) OR A RESOLVED PASSIVE BEARING (BRT= 2), THE ASW BEARING 1 FIELD REPORTS THE SINGLE BEARING THAT IS THE SUBJECT OF THE MESSAGE. ASW BEARING 2 WILL NOT BE USED FOR THESE BEARING TYPES. B. WHEN THE J5.4 MESSAGE REPORTS AMBIGUOUS PASSIVE BEARING (BRT=1), THE ASW BEARING 1 AND ASW BEARING 2 FIELDS EACH REPORT A BEARING SIMULTANEOUSLY. C. WHEN THE J5.4 BEARING REPORT TYPE IS SET TO NO STATEMENT (BRT=3), THE ASW BEARING 2 WILL NOT BE INTERPRETED.
374	001	BROADBAND ----- NO STATEMENT BROADBAND NOISE	0 1	REPORTS THE PRESENCE OF ACOUSTIC BROADBAND NOISE.

5.1-968

MIL-STD-6016B

FIELD CODING FOR J5.4C1

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
375	001	RANGE ACCURACY, ASW -----		THE VALUES EXPRESS THE PLUS OR MINUS ACCURACY OF THE RANGE OF AN ASW CONTACT.
		NO STATEMENT	0	
		0.5 MILES	1	
		1 MILE	2	
		2 MILES	3	
		3 MILES	4	
		5 MILES	5	
		10 MILES	6	
		15 MILES	7	
		20 MILES	8	
		25 MILES	9	
		30 MILES	10	
		35 MILES	11	
		40 MILES	12	
		50 MILES	13	
		75 MILES	14	
		100 MILES	15	
757	016	RANGE -----		THE RANGE OF THE CONTACT FROM THE DETECTING SENSOR.
		NO STATEMENT/UNKNOWN	0	
		250 THROUGH 511,750 YARDS	1 THROUGH 2047	IN 250 YARD INCREMENTS.
359	002	SENSOR INDICATOR -----		EXPRESSES TYPE OF SENSOR DETECTING CONTACT.
		NO STATEMENT	0	
		ACTIVE SONAR	1	
		PASSIVE SONAR	2	
		PASSIVE SONOBUOY	3	
		ACTIVE SONOBUOY	4	
		MAD	5	
		VISUAL/ELECTRO-OPTICS (IRDS)	6	
		RADAR	7	
372	024	BEARING ACCURACY, ASW -----		THE ACCURACY OF THE BEARING(S) BEING REPORTED IS EQUAL TO OR BETTER THAN THE REPORTED BEARING ACCURACY. WHEN TWO BEARINGS ARE REPORTED, THE SAME BEARING ACCURACY APPLIES TO BOTH BEARINGS.

5.1-969

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
372	024	BEARING ACCURACY, ASW	(CONTINUED)	

		NO STATEMENT	0	
		+ OR - 2 DEGREES	1	
		+ OR - 5 DEGREES	2	
		+ OR - 10 DEGREES	3	
		+ OR - 15 DEGREES	4	
		+ OR - 20 DEGREES	5	
		+ OR - 30 DEGREES	6	
		+ OR - 45 DEGREES	7	
		OVER 45 DEGREES	8	
		UNDEFINED	9 THROUGH 15	

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: ACOUSTIC BEARING/RANGE CONTINUATION WORD 2

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25				
TRACK NUMBER, ORIGIN																:	DEPTH, SENSOR										:	DPTH A/B
19																:	7										:	2

:	69	68	67	66	65	64	63	62	61	60	59	58	57	:	56	55	54	53	:	52	51	50
:														:	SOUND			:				
:	SPARE													:	PROPAGATION			:	---			
:														:	PATH			:				
:	13													:	4			:				

WORD DESCRIPTION

WORD NUMBER: J5.4C2

WORD TITLE: ACOUSTIC BEARING/RANGE CONTINUATION WORD 2

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550 001		WORD FORMAT	0-	1 2	01
1551 001		CONTINUATION WORD LABEL	2-	6 5	00010
366 014		DEPTH CONTACT	7-	10 4	
1798 003		SUBSURFACE (MARITIME) PLATFORM ACTIVITY	11-	17 7	
756 007		SPARE	18-	24 7	
366 010		DEPTH, ABOVE/BELOW LAYER (SENSOR) (DPTH A/B)	25-	26 2	
366 011		DEPTH, SENSOR	27-	33 7	
769 009		TRACK NUMBER, ORIGIN	34-	52 19	
377 001		SOUND PROPAGATION PATH	53-	56 4	
756 013		SPARE	57-	69 13	

FIELD CODING FOR J5.4C2

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
366	014	DEPTH CONTACT -----		EXPRESSES DEPTH BY DESCRIPTION OF HORIZONTAL PLANES AT OR BELOW MEAN SEA LEVEL (MSL).
		NO STATEMENT	0	
		ESTIMATED SHALLOW	1	
		ABOVE LAYER	2	
		BELOW LAYER	3	
		ESTIMATED DEEP	4	
		BOTTOMED	5	
		UNKNOWN	6	
		PERISCOPE DEPTH	7	
		UNDEFINED	8 THROUGH 15	
1798	003	SUBSURFACE (MARITIME) PLATFORM ACTIVITY -----		THE SUBSURFACE (MARITIME) PLATFORM ACTIVITY FIELD ALONG WITH THE SUB- SURFACE (MARITIME) PLATFORM FIELD FURTHER DEFINES THE IDENTITY OF A SUBSURFACE (MARITIME) TRACK.
		NO STATEMENT	0	
		RECONNAISSANCE	1	
		OVER THE HORIZON	2	
		TARGETING (OTHT)		
		TRAINING	3	
		DIVING	4	
		ANTISURFACE WARFARE	5	
		ELECTRONIC WARFARE (EW)	6	
		SURVEILLANCE	7	
		SEARCH AND RESCUE (SAR)	8	
		ESCORTING	9	
		MINELAYING	10	
		TRANSITING	11	
		SPECIAL WEAPONS ATTACK	12	
		SURFACING	13	
		AMPHIBIOUS WARFARE	14	
		INTELLIGENCE COLLECTING	15	
		PATROL	16	
		TRANSPORT	17	
		ANTISUBMARINE WARFARE (ASW)	18	
		SHADOWING/INTERVENING	19	
		BOTTOMING	20	
		SPECIAL WARFARE	21	
		STRIKE WARFARE	22	
		CLANDESTINE OPERATIONS	23	
		SNORKELING	24	

FIELD CODING FOR J5.4C2

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1798	003	SUBSURFACE (MARITIME) PLATFORM (CONTINUED) ACTIVITY -----		
		CONVENTIONAL ATTACK	25	
		MINE COUNTERMEASURES	26	
		MINE WARFARE	27	
		MARKING	28	
		NONCOMBATANT OPERATIONS	29	
		DIRECT SUPPORT	30	
		VIDEO DATA LINKING (TARGETING)	31	A METHOD OF PROVIDING REMOTE TARGETING DATA TO A FIRING PLATFORM/WEAPON.
		UNDEFINED	32 THROUGH 49	
		RETURN TO BASE (RTB)	50	
		UNDEFINED	51 THROUGH 114	
		SUBSURFACE (MARITIME) ACTIVITY 1 THROUGH 12	115 THROUGH 126	A SPECIFIC SUBSURFACE (MARITIME) MISSION DEFINED BY THE JOINT OPERATIONAL COMMANDER.
		RESET TO NO STATEMENT	127	
366	010	DEPTH, ABOVE/BELOW LAYER (SENSOR) -----		REPORTS WHETHER SENSOR DEPTH IS ABOVE OR BELOW LAYER.
		NO STATEMENT	0	
		ABOVE LAYER	1	
		BELOW LAYER	2	
		UNDEFINED	3	
366	011	DEPTH, SENSOR -----		EXPRESSES DEPTH OF SENSOR IN 15 METER INCREMENTS AS MEASURED DOWNWARD FROM MEAN SEA LEVEL (MSL) AS A POSITIVE QUANTITY IN METERS. IN 15 METER INCREMENTS.
		0 THROUGH 1890 METERS	0 THROUGH 126	
		NO STATEMENT	127	
769	009	TRACK NUMBER, ORIGIN -----		THE TN IDENTIFYING THE LOCATION OF THE REPORTED BEARING'S ORIGIN, E.G., A UNIT'S LOCATION, OTHER TRACK, OR A POINT. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER

5.1-975

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	009	TRACK NUMBER, ORIGIN -----	(CONTINUED)	

AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE-BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6
00111	7
01000	A
01001	B
01010	C
01011	D
01100	E
01101	F
01110	G
01111	H
10000	J
10001	K
10010	L
10011	M
10100	N
10101	P
10110	Q

FIELD CODING FOR J5.4C2

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	009	TRACK NUMBER, ORIGIN -----	(CONTINUED)	
				10111 R
				11000 S
				11001 T
				11010 U
				11011 V
				11100 W
				11101 X
				11110 Y
				11111 Z
		00000	0	NO STATEMENT.
		00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		00077	63	ILLEGAL.
		00100-00175	64 THROUGH 125	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		00176	126	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		00177	127	COLLECTIVE ADDRESS.
		00200-07776	128 THROUGH 4094	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		07777	4095	ILLEGAL.
		0A000-0Z777	4096 THROUGH 16383	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		10000-17777	16384 THROUGH 20479	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		20000-27777	32768 THROUGH 36863	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE

5.1-977

MIL-STD-6016B

FIELD CODING FOR J5.4C2

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	009	TRACK NUMBER, ORIGIN -----	(CONTINUED)	
				USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		70000-77776	114688 THROUGH 118782	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G.,

5.1-978

MIL-STD-6016B

FIELD CODING FOR J5.4C2 (SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	009	TRACK NUMBER, ORIGIN -----	(CONTINUED)	
		77777	118783	TRACKS AND REFERENCE POINTS. ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
377	001	SOUND PROPAGATION PATH -----		REPORTS THE PATH VIA WHICH THE ACOUSTIC DETECTION WAS GAINED.
		NO STATEMENT	0	
		UNKNOWN	1	
		DIRECT PATH	2	
		BOTTOM BOUNCE	3	
		CONVERGENCE ZONE 1	4	
		CONVERGENCE ZONE 2	5	
		CONVERGENCE ZONE 3	6	
		OR BEYOND		
		CONVERGENCE ZONE UNSPECIFIED	7	
		MULTIPATH	8	
		UNDEFINED	9 THROUGH 15	

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

TABLE J6-1. J6 Amplification Word Applicability Table

INITIAL WORD	SUBLABEL							
	J6.0I AMPLIFICATION							
EXTENSION WORD - 0	J6.0E0							
CONTINUATION WORD - 0								
1	J6.0C1 CONTINUATION WORD 1							
...								
...								
...								
...								
...								
...								
...								
...								
31								

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

J6.0 MESSAGE SUMMARY

PURPOSE

The J6.0 Amplification message is used to exchange amplifying information, to include threat information, within the interface.

DATA ELEMENT SUMMARY

<u>J6.0I</u>		<u>J6.0E0 (Continued)</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	LOCAL DISCRETE IDENTIFIER	12
LABEL, J-SERIES	5	SPARE	1
SUBLABEL, J-SERIES	3	TRACK NUMBER, CONTROLLING	19
MESSAGE LENGTH INDICATOR	3	AGENCY OF TN REFERENCE	
SPARE	1		
ENVIRONMENT/CATEGORY	3		
SPECIAL PROCESSING INDICATOR	1		
RESPONSE INDICATOR	1		
TRACK NUMBER, REFERENCE	19		
NATIONALITY/ALLIANCE OF TRACK	7		
SPACE PLATFORM(6)*****			
AIR PLATFORM(6)	*		
SURFACE (MARITIME) PLATFORM(6)*			
SUBSURFACE (MARITIME)	*		
PLATFORM(6)	*		
LAND (GROUND) PLATFORM(6)	*		
SPARE(6)*****	6		
SPACE PLATFORM ACTIVITY(7)*****			
AIR PLATFORM ACTIVITY(7)	*		
SURFACE (MARITIME) PLATFORM	*		
ACTIVITY(7)	*		
SUBSURFACE (MARITIME) PLATFORM*			
ACTIVITY(7)	*		
LAND (GROUND) PLATFORM	*		
ACTIVITY(7)	*		
SPARE(7)*****	7		
ACTIVITY AMPLIFICATION INDEX	6		
OPERATIONAL STATUS	4		
SPARE	2		
<u>J6.0E0</u>		<u>J6.0C1</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	WORD FORMAT	2
SPACE SPECIFIC TYPE(12)*****		CONTINUATION WORD LABEL	5
AIR SPECIFIC TYPE(12)	*	THREAT TYPE	4
SURFACE (MARITIME) SPECIFIC	*	THREAT WEAPON	5
TYPE(12)	*	THREAT FUEL	5
SUBSURFACE (MARITIME) SPECIFIC*		SAM/SSM TYPE, 1	9
TYPE(12)	*	SAM/SSM TYPE, 2	9
LAND (GROUND) SPECIFIC	*	SAM/SSM TYPE, 3	9
TYPE(12)	*	SPARE	22
SPARE(12)*****	12		
TYPE MODIFICATION	5		
TRACK NUMBER, OBJECTIVE	19		

MIL-STD-6016B

J6.0 TRANSMIT/RECEIVE RULES

TITLE: Amplification Message

TRANSMIT RULES

1. The J6.0 Amplification message shall be transmitted on an established track when data are available. It shall contain the latest available locally derived data. This message consists of the J6.0I Amplification initial word transmitted alone or, if applicable and data are available, the J6.0I word immediately followed by the J6.0E0 Amplification extension word, and the J6.0C1 Amplification continuation word 1. Additionally, under the following conditions, a JU may transmit data received from remote sources:

a. When data for at least one field in the J6.0 message have been locally derived.

b. Upon operator action to transmit data received from remote sources for a track when no local data are available.

2. The J6.0 message is transmitted once:

a. When initiated.

b. When data in any field change and/or are revalidated.

c. Automatically when requested by a J7.1 Data Update Request message.

d. Periodically at an RRN = 2 (every 3.2 minutes).

3. When the J6.0 message is transmitted in response to a J7.1 Data Update Request message it shall contain all locally originated data as specified and may report the latest data from remote sources for which no locally derived data are available.

4. A J6.0 message containing a field set to the Reset to No Statement value shall be transmitted only as a result of operator action.

J6.0 TRANSMIT/RECEIVE RULES (Continued)

TRANSMIT RULES (Continued)

5. When Activity Amplification Index values 1 through 10 are being reported, the J6.0 message is transmitted three times at an RRN = 6 (12 seconds, 8-20 second interval) except that a change in the Activity Amplification Index shall interrupt the redundant transmission of the message containing the previous Activity Amplification Index. When data in any other fields change or are validated prior to completion of the redundant sequence, they shall be reflected in the later message(s).

RECEIVE RULES

The acceptance of remote data shall be optional when locally derived data are available. However, the rejection of remote data must require operator action and the subsequent transmission of locally derived data. Processing of amplification data upon receipt is a system option, subject to the J6.0 message Minimum Implementation requirements, and the rules in section 4.6. Therefore, if remote J6.0 data are received from multiple sources about the same track, systems may choose to store and display the data from any or all of these sources, and select the data to be retained either automatically or manually.

.....

WORD TITLE: AMPLIFICATION INITIAL WORD

24	23	22	21	20	19:	18:	17:	16	15	14:	13:	12	11	10:	09	08	07:	06	05	04	03	02:	01	00:			
					:RSP:		:				:	MESSAGE			:	SUBLABEL,			:				:	WORD		:	
<---					:IND:		SPI:	ENV/CAT		:	SP	:	LENGTH			:	J-SERIES			:	LABEL, J-SERIES			:	FORMAT		:
					:	1	:	1	:	3		:	1	:	3		:	3		:	5			:	2		:
49	48	47	46	45:	44	43	42	41	40	39	38:	37	36	35	34	33	32	31	30	29	28	27	26	25			
SPACE PLATFORM				:								:															
AIR PLATFORM				:								:															
SURFACE (MARITIME) PLATFORM				:								:															
				:								:															
SUBSURFACE (MARITIME) PLATFORM:				:	NATIONALITY/ALLIANCE OF TRACK							:	TRACK NUMBER, REFERENCE														
				:								:															
LAND (GROUND) PLATFORM				:								:															
				:								:															
SPARE				:								:															
6				:	7							:	19														

.....

WORD TITLE: AMPLIFICATION INITIAL WORD

:	69	:	68	:	67	:	66	:	65	:	64	:	63	:	62	:	61	:	60	:	59	:	58	:	57	:	56	:	55	:	54	:	53	:	52	:	51	:	50
:	SP	:	OPERATIONAL STATUS	:	ACTIVITY AMPLIFICATION INDEX	:	SPACE PLATFORM ACTIVITY																----																
:		:		AIR PLATFORM ACTIVITY																----																			
:		:		SURFACE (MARITIME) PLATFORM ACTIVITY																----																			
:		:		SUBSURFACE (MARITIME) PLATFORM ACTIVITY																----																			
:		:		LAND (GROUND) PLATFORM ACTIVITY																----																			
:		:		SPARE																----																			
:		:																		----																			
:	2	:	4	:	6	:	7																:																

WORD DESCRIPTION

WORD NUMBER: J6.0I

WORD TITLE: AMPLIFICATION INITIAL WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	00
270	004	LABEL, J-SERIES	2-	6 5	00110
271	005	SUBLABEL, J-SERIES	7-	9 3	000
800	001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
756	001	SPARE (SP)	13	1	
275	004	ENVIRONMENT/CATEGORY (ENV/CAT)	14-	16 3	SEE NOTES 1, 2, AND 3.
292	002	SPECIAL PROCESSING INDICATOR (SPI)	17	1	
710	003	RESPONSE INDICATOR (RSP IND)	18	1	
769	002	TRACK NUMBER, REFERENCE	19-	37 19	
748	001	NATIONALITY/ALLIANCE OF TRACK	38-	44 7	
1797	005	SPACE PLATFORM	45-	50 6	SEE NOTE 1.
1797	001	AIR PLATFORM	45-	50 6	SEE NOTE 1.
1797	002	SURFACE (MARITIME) PLATFORM	45-	50 6	SEE NOTE 1.
1797	003	SUBSURFACE (MARITIME) PLATFORM	45-	50 6	SEE NOTE 1.
1797	004	LAND (GROUND) PLATFORM	45-	50 6	SEE NOTE 1.
756	006	SPARE	45-	50 6	
1798	005	SPACE PLATFORM ACTIVITY	51-	57 7	SEE NOTE 2.
1798	001	AIR PLATFORM ACTIVITY	51-	57 7	SEE NOTE 2.
1798	002	SURFACE (MARITIME) PLATFORM ACTIVITY	51-	57 7	SEE NOTE 2.
1798	003	SUBSURFACE (MARITIME) PLATFORM ACTIVITY	51-	57 7	SEE NOTE 2.
1798	004	LAND (GROUND) PLATFORM ACTIVITY	51-	57 7	SEE NOTE 2.
756	007	SPARE	51-	57 7	
752	001	ACTIVITY AMPLIFICATION INDEX	58-	63 6	SEE NOTE 3.
753	001	OPERATIONAL STATUS	64-	67 4	
756	002	SPARE (SP)	68-	69 2	

J6.0I WORD NOTES
NOTE 1 Environment/Category - Platform (Sheet 1 of 5)

PLATFORM	ENVIRONMENT/CATEGORY						
	0	1	2	3	4	5	6-7
	NO STATEMENT/ UNKNOWN	SPACE	AIR	SURFACE (MARITIME)	SUBSURFACE (MARITIME)	LAND (GROUND)	UNDEFINED
0	NO STATEMENT	NO STATEMENT	NO STATEMENT	NO STATEMENT	NO STATEMENT	NO STATEMENT	UNDEFINED
1	ILLEGAL	SATELLITE	FIGHTER	AIRCRAFT CARRIER (CV)	SUBMARINE PROPULSION UNKNOWN	TROOP CONCENTRATION/UNIT	UNDEFINED
2	ILLEGAL	BASE	FIGHTER BOMBER	BATTLESHIP	DIESEL ELECTRIC SUBMARINE GENERAL	HEADQUARTER COMPLEX	UNDEFINED
3	ILLEGAL	WEAPON	ATTACK	CRUISER	DIESEL ELECTRIC ATTACK SUBMARINE	COMMAND/CONTROL COMMAND AND CONTROL CENTER	UNDEFINED
4	ILLEGAL	TRANSPORT	BOMBER	DESTROYER	DIESEL ELECTRIC MISSILE SUBMARINE	ASSEMBLY AREA	UNDEFINED
5	ILLEGAL	PATROL	RECONNAISSANCE	FRIGATE	DIESEL ELECTRIC BALLISTIC MISSILE SUBMARINE	INSTALLATION/FACILITY, MILITARY	UNDEFINED
6	ILLEGAL	SUPPORT	TANKER	FAST PATROL BOAT	TYPE 1 DIESEL	INSTALLATION/FACILITY, CIVILIAN	UNDEFINED
7	ILLEGAL	DEBRIS	TANKER (BOOM ONLY)	AMPHIBIOUS	TYPE 2 DIESEL	AIRFIELD/AIRBASE	UNDEFINED
8	ILLEGAL	DECOY	TANKER (DROGUE ONLY)	LHA/LHD	TYPE 3 DIESEL	PORT/HARBOR FACILITY	UNDEFINED
9	ILLEGAL	UNDEFINED	INTERCEPTOR	AMPHIBIOUS ASSAULT COMMAND SHIP (LCC)	NUCLEAR SUBMARINE GENERAL	STORAGE SITE	UNDEFINED
10	ILLEGAL	UNDEFINED	TRANSPORT	LANDING CRAFT (LC)	NUCLEAR ATTACK SUBMARINE	TACTICAL POSITION	UNDEFINED

5.1-989

MIL-STD-6016B

J6.0I WORD NOTES (Continued)
NOTE 1 Environment/Category - Platform (Sheet 2 of 5)

PLATFORM	ENVIRONMENT/CATEGORY						
	0	1	2	3	4	5	6-7
	NO STATEMENT/ UNKNOWN	SPACE	AIR	SURFACE (MARITIME)	SUBSURFACE (MARITIME)	LAND (GROUND)	UNDEFINED
11	ILLEGAL	UNDEFINED	AIRBORNE COMMAND POST (ACP)	TROOP SHIP	NUCLEAR MISSILE SUBMARINE	FORTIFICATION	UNDEFINED
12	ILLEGAL	UNDEFINED	MISSILE CARRIER	TANKER/OILER	NUCLEAR BALLISTIC MISSILE SUBMARINE	INTERSECTION	UNDEFINED
13	ILLEGAL	UNDEFINED	MISSILE	AUXILIARY SHIP	TYPE I NUCLEAR	CONVOY	UNDEFINED
14	ILLEGAL	UNDEFINED	ELECTRONIC WARFARE (EW)	MINE WARFARE SHIP	TYPE II NUCLEAR	COMBAT VEHICLE	UNDEFINED
15	ILLEGAL	UNDEFINED	ANTISUBMARINE WARFARE (ASW)	MINE COUNTERMEASURES MARITIME VESSEL (MCMV)	TYPE III NUCLEAR	COMBAT SUPPORT VEHICLE	UNDEFINED
16	ILLEGAL	UNDEFINED	AIRBORNE EARLY WARNING AND CONTROL (AEW&C)	HOSPITAL SHIP	TYPE IV NUCLEAR	VEHICLE, OTHER	UNDEFINED
17	ILLEGAL	UNDEFINED	MARITIME PATROL AIRCRAFT (MPA)	SURFACED SUBMARINE	TYPE V NUCLEAR	TANK	UNDEFINED
18	ILLEGAL	UNDEFINED	SEARCH AND RESCUE (SAR)	HYDROFOIL	NON-SUBMARINE	TRAIN	UNDEFINED
19	ILLEGAL	UNDEFINED	DRONE	AIR CUSHION VEHICLE	SURFACE VESSEL	REMOTELY PILOTED VEHICLE	UNDEFINED
20	ILLEGAL	UNDEFINED	REMOTELY PILOTED VEHICLE (RPV)	INTELLIGENCE COLLECTOR	TORPEDO	MORTAR	UNDEFINED
21	ILLEGAL	UNDEFINED	FIXED WING GUNSHIP	SURVEY VESSEL	MINE	FIELD ARTILLERY	UNDEFINED
22	ILLEGAL	UNDEFINED	CIVIL, AIRLINER	NON-MILITARY	DECOY	AIR DEFENSE ARTILLERY	UNDEFINED
23	ILLEGAL	UNDEFINED	CIVIL, GENERAL	LANDING PLATFORM	WRECK	ROCKET LAUNCHER	UNDEFINED

5.1-990

MIL-STD-6016B

J6.0I WORD NOTES (Continued)
NOTE 1 Environment/Category - Platform (Sheet 3 of 5)

PLATFORM	ENVIRONMENT/CATEGORY						
	0	1	2	3	4	5	6-7
	NO STATEMENT/ UNKNOWN	SPACE	AIR	SURFACE (MARITIME)	SUBSURFACE (MARITIME)	LAND (GROUND)	UNDEFINED
24	ILLEGAL	UNDEFINED	LIGHTER THAN AIR (LTA)	LANDING SHIP	SEABED PIPELINE	MISSILE LAUNCHER	UNDEFINED
25	ILLEGAL	UNDEFINED	GLIDER	COMMAND	FISH/MARINE LIFE	SPECIAL WEAPON	UNDEFINED
26	ILLEGAL	UNDEFINED	DECOY	OCEAN RESEARCH	SWIMMER/FROGMAN	BRIDGE	UNDEFINED
27	ILLEGAL	UNDEFINED	HELICOPTER (HELO)	PATROL	KNUCKLE/WAKE	BUILDING/STRUCTURE	UNDEFINED
28	ILLEGAL	UNDEFINED	ATTACK HELICOPTER	SUPPORT	ATTACK SUBMARINE	POWER FACILITY	UNDEFINED
29	ILLEGAL	UNDEFINED	HELICOPTER GUNSHIP	FISHING VESSEL	CRUISE MISSILE LAUNCHER	RAIL FACILITY	UNDEFINED
30	ILLEGAL	UNDEFINED	ANTISUBMARINE WARFARE HELICOPTER (ASW HELO)	MERCHANT VESSEL	PINNACLE/SEA MOUNTAIN	TERRAIN	UNDEFINED
31	ILLEGAL	SPACE GENERAL	MINE WARFARE HELICOPTER	PATROL CRAFT ESCORT	NON-MILITARY SUBMERSIBLE	NAVAID SITE	UNDEFINED
32	ILLEGAL	UNDEFINED	TRANSPORT HELICOPTER	AMPHIBIOUS GENERAL ASSAULT	UNDEFINED	COMMUNICATION SITE	UNDEFINED
33	ILLEGAL	UNDEFINED	TACTICAL SUPPORT	MISSILE CONTROL UNIT	TYPE VI NUCLEAR	RADAR SITE	UNDEFINED
34	ILLEGAL	UNDEFINED	PATROL	DECOY	TYPE VII NUCLEAR	ANTENNA/EMITTER	UNDEFINED
35	ILLEGAL	UNDEFINED	MISCELLANEOUS FIXED WING	UNDEFINED	CONVENTIONAL (COMMAND AND CONTROL)	BUFFER CENTER	UNDEFINED
36	ILLEGAL	UNDEFINED	MISSILE CONTROL UNIT	UNDEFINED	CONVENTIONAL (AUXILIARY)	ELECTRONIC WARFARE SITE	UNDEFINED

5.1-991

MIL-STD-6016B

J6.0I WORD NOTES (Continued)
NOTE 1 Environment/Category - Platform (Sheet 4 of 5)

PLATFORM	ENVIRONMENT/CATEGORY						
	0	1	2	3	4	5	6-7
	NO STATEMENT/ UNKNOWN	SPACE	AIR	SURFACE (MARITIME)	SUBSURFACE (MARITIME)	LAND (GROUND)	UNDEFINED
37	ILLEGAL	UNDEFINED	SURFACE-TO-AIR MISSILE (SAM)	UNDEFINED	NUCLEAR (COMMAND AND CONTROL)	SURVEILLANCE SITE	UNDEFINED
38	ILLEGAL	UNDEFINED	AIR-TO-SURFACE MISSILE (ASM)	UNDEFINED	UNDEFINED	BRIDGING EQUIPMENT	UNDEFINED
39	ILLEGAL	UNDEFINED	SURFACE-TO- SURFACE MISSILE (SSM)	UNDEFINED	UNDEFINED	MINE WARFARE EQUIPMENT	UNDEFINED
40	ILLEGAL	UNDEFINED	LOGISTIC	UNDEFINED	UNDEFINED	SURFACE-TO-AIR MISSILE (SAM) SITE	UNDEFINED
41	ILLEGAL	UNDEFINED	AIR-TO-AIR MISSILE (AAM)	UNDEFINED	UNDEFINED	MARITIME HEADQUARTERS	UNDEFINED
42	ILLEGAL	UNDEFINED	SUBSURFACE-TO- SURFACE MISSILE	UNDEFINED	UNDEFINED	AIR SUPPORT RADAR TEAM (ASRT)	UNDEFINED
43	ILLEGAL	UNDEFINED	SURFACE-TO- SUBSURFACE MISSILE	UNDEFINED	UNDEFINED	DIRECT AIR SUPPORT CENTER (DASC)	UNDEFINED
44	ILLEGAL	UNDEFINED	CRUISE MISSILE	UNDEFINED	UNDEFINED	FORWARD AIR CONTROL PARTY (FACP)	UNDEFINED
45	ILLEGAL	UNDEFINED	BALLISTIC MISSILE	UNDEFINED	UNDEFINED	TACTICAL OPERATIONS CENTER (TOC)	UNDEFINED
46	ILLEGAL	UNDEFINED	AIRBORNE LAND SURVEILLANCE	UNDEFINED	UNDEFINED	TACTICAL DATA SYSTEMS (TDS)	UNDEFINED
47	ILLEGAL	UNDEFINED	AIRBORNE LASER	UNDEFINED	UNDEFINED	DECOY	UNDEFINED

5.1-992

MIL-STD-6016B

J6.0I WORD NOTES (Continued)
NOTE 1 Environment/Category - Platform (Sheet 5 of 5)

PLATFORM	ENVIRONMENT/CATEGORY						
	0	1	2	3	4	5	6-7
	NO STATEMENT/ UNKNOWN	SPACE	AIR	SURFACE (MARITIME)	SUBSURFACE (MARITIME)	LAND (GROUND)	UNDEFINED
48	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	TRACKED VEHICLE	UNDEFINED
49	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	MISSILE CONTROL UNIT	THEATER HIGH ALTITUDE AREA DEFENSE (THAAD)	UNDEFINED
50	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	JOINT TACTICAL GROUND STATION (JTAGS)	UNDEFINED
51	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	ARMOR	UNDEFINED
52	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	CAVALRY	UNDEFINED
53	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	ENGINEER	UNDEFINED
54	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	AIRBORNE/SPECIAL OPERATIONS	UNDEFINED
55	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	AVIATION	UNDEFINED
56	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	AIR DEFENSE SITE	UNDEFINED
57	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	BALLISTIC MISSILE DEFENSE SITE	UNDEFINED
58 • • • 61	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
62	ILLEGAL	BALLISTIC MISSILE GENERAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
63	ILLEGAL	RESET TO NO STATEMENT	RESET TO NO STATEMENT	RESET TO NO STATEMENT	RESET TO NO STATEMENT	RESET TO NO STATEMENT	UNDEFINED

5.1-993

MIL-STD-6016B

J6.0I WORD NOTES (Continued)
NOTE 2 Environment/Category - Platform Activity (Sheet 1 of 4)

PLATFORM ACTIVITY	E N V I R O N M E N T / C A T E G O R Y						
	0	1	2	3	4	5	6-7
	NO STATEMENT/ UNKNOWN	SPACE	AIR	SURFACE (MARITIME)	SUBSURFACE (MARITIME)	LAND (GROUND)	UNDEFINED
0	NO STATEMENT	NO STATEMENT	NO STATEMENT	NO STATEMENT	NO STATEMENT	NO STATEMENT	UNDEFINED
1	ILLEGAL	RECONNAISSANCE	RECONNAISSANCE	AIR WARFARE SUPPORT	RECONNAISSANCE	HOLDING	UNDEFINED
2	ILLEGAL	ANTISPACE WARFARE	OVER THE HORIZON TARGETING (OTHT)	OVER THE HORIZON TARGETING (OTHT)	OVER THE HORIZON TARGETING (OTHT)	DELAYING	UNDEFINED
3	ILLEGAL	TELEVISION	TRAINING	TRAINING	TRAINING	MOVING	UNDEFINED
4	ILLEGAL	LOGISTICS	LOGISTICS SUPPORT	LOGISTICS SUPPORT	DIVING	DETECTING	UNDEFINED
5	ILLEGAL	ANTISURFACE WARFARE	ANTISURFACE WARFARE	ANTISURFACE WARFARE	ANTISURFACE WARFARE	ACQUIRING	UNDEFINED
6	ILLEGAL	ELECTRONIC WARFARE (EW)	ELECTRONIC WARFARE (EW)	ELECTRONIC WARFARE (EW)	ELECTRONIC WARFARE (EW)	ENGAGING	UNDEFINED
7	ILLEGAL	SURVEILLANCE	SURVEILLANCE	FISHERY PROTECTION	SURVEILLANCE	ADVANCING	UNDEFINED
8	ILLEGAL	DATA LINK	SEARCH AND RESCUE (SAR)	SEARCH AND RESCUE (SAR)	SEARCH AND RESCUE (SAR)	ANTIAIR ATTACK	UNDEFINED
9	ILLEGAL	ELECTRONIC WARFARE SUPPORT (ES)	ESCORTING	ESCORTING	ESCORTING	AMPHIBIOUS ATTACK	UNDEFINED
10	ILLEGAL	ELECTRONIC ATTACK (EA)	MINELAYING	MINELAYING	MINELAYING	FIRING/LAUNCHING	UNDEFINED
11	ILLEGAL	COMMUNICATIONS	TRANSITING	TRANSITING	TRANSITING	CONVENTIONAL ATTACK ASSAULT	UNDEFINED
12	ILLEGAL	RETURN TO BASE (RTB)	SPECIAL WEAPONS ATTACK	NAVAL GUNFIRE SUPPORT	SPECIAL WEAPONS ATTACK	SPECIAL WEAPONS ATTACK	UNDEFINED
13	ILLEGAL	UNDEFINED	INTRUDING	INTRUDING	SURFACING	DEMOLITION	UNDEFINED
14	ILLEGAL	UNDEFINED	ELECTRONIC WARFARE SUPPORT (ES)	AMPHIBIOUS WARFARE	AMPHIBIOUS WARFARE	OVER THE HORIZON TARGETING (OTHT)	UNDEFINED
15	ILLEGAL	UNDEFINED	COMMUNICATIONS RELAY	INTELLIGENCE COLLECTING	INTELLIGENCE COLLECTING	TRANSITING	UNDEFINED
16	ILLEGAL	UNDEFINED	PATROL (OCEAN SURVEILLANCE)	PATROL	PATROL	RETURN TO BASE	UNDEFINED
17	ILLEGAL	UNDEFINED	AIRLIFT (TRANSPORT)	TRANSPORT	TRANSPORT	DEPLOYING	UNDEFINED
18	ILLEGAL	UNDEFINED	ANTISUBMARINE WARFARE (ASW)	ANTISUBMARINE WARFARE (ASW)	ANTISUBMARINE WARFARE (ASW)	EMISSION CONTROL (EMCON)	UNDEFINED
19	ILLEGAL	UNDEFINED	SHADOWING/INTERVENING	SHADOWING/INTERVENING	SHADOWING/INTERVENING	RIVER CROSSING	UNDEFINED
20	ILLEGAL	UNDEFINED	TOWING	TOWING	BOTTOMING	LOADING	UNDEFINED
21	ILLEGAL	UNDEFINED	AIR ASSAULT	SPECIAL WARFARE	SPECIAL WARFARE	TOWING	UNDEFINED
22	ILLEGAL	UNDEFINED	INTERCEPTION	STRIKE WARFARE	STIKE WARFARE	BUILDING FORTIFICATION BARRIER	UNDEFINED
23	ILLEGAL	UNDEFINED	ELECTRONIC ATTACK (EA)	ANTIAIR WARFARE	CLANDESTINE OPERATIONS	CLEARING BARRIER	UNDEFINED

5.1-994

MIL-STD-6016B

J6.0I WORD NOTES (Continued)
NOTE 2 Environment/Category - Platform Activity (Sheet 2 of 4)

PLATFORM ACTIVITY	E N V I R O N M E N T / C A T E G O R Y						
	0	1	2	3	4	5	6-7
	NO STATEMENT/ UNKNOWN	SPACE	AIR	SURFACE (MARITIME)	SUBSURFACE (MARITIME)	LAND (GROUND)	UNDEFINED
24	ILLEGAL	UNDEFINED	POLICING	FISHING	SNORKELING	RECOVERING EQUIPMENT	UNDEFINED
25	ILLEGAL	UNDEFINED	CONVENTIONAL ATTACK	PICKETING	CONVENTIONAL ATTACK	MINE SWEEPING	UNDEFINED
26	ILLEGAL	UNDEFINED	MEDICAL EVACUATION (MEDEVAC)	MINE COUNTERMEASURES	MINE COUNTERMEASURES	MINE LAYING	UNDEFINED
27	ILLEGAL	UNDEFINED	MINE COUNTERMEASURES	MINE WARFARE	MINE WARFARE	JAMMING	UNDEFINED
28	ILLEGAL	UNDEFINED	SEARCH	MARKING	MARKING	RECONNAISSANCE PATROLLING	UNDEFINED
29	ILLEGAL	UNDEFINED	REFUELING/TANKING	NONCOMBATANT OPERATIONS	NONCOMBATANT OPERATIONS	SEARCH AND RESCUE (SAR)	UNDEFINED
30	ILLEGAL	UNDEFINED	INTERDICTION	UNDERWAY REPLENISHMENT	DIRECT SUPPORT	TRAINING	UNDEFINED
31	ILLEGAL	UNDEFINED	COMBAT AIR PATROL (CAP)	SURVEYING	VIDEO DATA LINKING (TARGETING)	MEDICAL EVACUATION (MEDEVAC)	UNDEFINED
32	ILLEGAL	UNDEFINED	FORWARD AIR CONTROLLER (FAC)	ELECTRONIC WARFARE SUPPORT (ES)	UNDEFINED	ESCORTING	UNDEFINED
33	ILLEGAL	UNDEFINED	VERY IMPORTANT PERSON (VIP) FLIGHT	ELECTRONIC ATTACK (EA)	UNDEFINED	TRANSPORTING	UNDEFINED
34	ILLEGAL	UNDEFINED	NONCOMBATANT OPERATIONS	FLIGHT OPERATIONS	UNDEFINED	SCREENING	UNDEFINED
35	ILLEGAL	UNDEFINED	CLOSE AIR SUPPORT (CAS)	VIDEO DATA LINKING (TARGETING)	UNDEFINED	SUPPORTING	UNDEFINED
36	ILLEGAL	UNDEFINED	AIRBORNE EARLY WARNING (AEW)	PLANE GUARD	UNDEFINED	REPAIRING	UNDEFINED
37	ILLEGAL	UNDEFINED	GROUND ATTACK TACTICS (GAT)	RESCUE SHIP/LIFEGUARD	UNDEFINED	REFUELING	UNDEFINED
38	ILLEGAL	UNDEFINED	AIRBORNE COMMAND POST (ACP)	UNDEFINED	UNDEFINED	NEUTRALIZING	UNDEFINED
39	ILLEGAL	UNDEFINED	RESCUE COMBAT AIR PATROL (RESCAP)	UNDEFINED	UNDEFINED	TARGETING	UNDEFINED
40	ILLEGAL	UNDEFINED	SURFACE COMBAT AIR PATROL (SUCAP)	UNDEFINED	UNDEFINED	BYPASSING	UNDEFINED
41	ILLEGAL	UNDEFINED	TANKING	UNDEFINED	UNDEFINED	CLOSING	UNDEFINED
42	ILLEGAL	UNDEFINED	SPOTTING	UNDEFINED	UNDEFINED	CONCENTRATING	UNDEFINED
43	ILLEGAL	UNDEFINED	STRIKE WARFARE	UNDEFINED	UNDEFINED	DEFENDING	UNDEFINED
44	ILLEGAL	UNDEFINED	SPECIAL	UNDEFINED	UNDEFINED	DISENGAGING	UNDEFINED
45	ILLEGAL	UNDEFINED	HIJACK	UNDEFINED	UNDEFINED	INFILTRATING	UNDEFINED
46	ILLEGAL	UNDEFINED	JAMMER	UNDEFINED	UNDEFINED	INTERDICTING	UNDEFINED

5.1-995

MIL-STD-6016B

J6.0I WORD NOTES (Continued)
NOTE 2 Environment/Category - Platform Activity (Sheet 3 of 4)

PLATFORM ACTIVITY	E N V I R O N M E N T / C A T E G O R Y						
	0 NO STATEMENT/ UNKNOWN	1 SPACE	2 AIR	3 SURFACE (MARITIME)	4 SUBSURFACE (MARITIME)	5 LAND (GROUND)	6-7 UNDEFINED
47	ILLEGAL	UNDEFINED	TROOPLIFT	UNDEFINED	UNDEFINED	LANDING	UNDEFINED
48	ILLEGAL	UNDEFINED	XRAY	UNDEFINED	UNDEFINED	OCCUPYING	UNDEFINED
49	ILLEGAL	UNDEFINED	ANTIAIR WARFARE (AAW)	UNDEFINED	UNDEFINED	DISPERSING	UNDEFINED
50	ILLEGAL	UNDEFINED	COMMAND AND CONTROL	RETURN TO BASE (RTB)	RETURN TO BASE (RTB)	SUPPLY/RESUPPLY	UNDEFINED
51	ILLEGAL	SPACE ACTIVITY 1	COUNTER-AIR-WARFARE	UNDEFINED	UNDEFINED	RETROGRADE WITHDRAWING	UNDEFINED
52	ILLEGAL	SPACE ACTIVITY 2	RETURN TO BASE (RTB)	UNDEFINED	UNDEFINED	TRANSMITTING	UNDEFINED
53	ILLEGAL	SPACE ACTIVITY 3	MINE WARFARE	UNDEFINED	UNDEFINED	ELECTRONIC WARFARE SUPPORT (ES)	UNDEFINED
54	ILLEGAL	SPACE ACTIVITY 4	CHAFF LAYING	UNDEFINED	UNDEFINED	ELECTRONIC ATTACK (EA)	UNDEFINED
55	ILLEGAL	SPACE ACTIVITY 5	VIDEO DATA LINKING (TARGETING)	UNDEFINED	UNDEFINED	MOVING EQUIPMENT	UNDEFINED
56	ILLEGAL	SPACE ACTIVITY 6	DIPPING	UNDEFINED	UNDEFINED	POWER UP AND MANNED, NOT EMITTING	UNDEFINED
57	ILLEGAL	SPACE ACTIVITY 7	RESCUE HELO	UNDEFINED	UNDEFINED	PREPARATION FOR LAUNCH	UNDEFINED
58	ILLEGAL	SPACE ACTIVITY 8	ORBITING	UNDEFINED	UNDEFINED	SITE SHUT DOWN TO UNPOWERED SATUS	UNDEFINED
59	ILLEGAL	SPACE ACTIVITY 9	UNDER RECALL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
60	ILLEGAL	SPACE ACTIVITY 10	ENGAGING	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
61	ILLEGAL	SPACE ACTIVITY 11	ENGAGING (PRIORITY KILL)	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
62	ILLEGAL	SPACE ACTIVITY 12	INVESTIGATING	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
63	ILLEGAL	UNDEFINED	CLEARED TO DROP	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
64	ILLEGAL	UNDEFINED	INTERVENING	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
65	ILLEGAL	UNDEFINED	DIVERTING	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
66	ILLEGAL	UNDEFINED	AIR-TO-GROUND	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
67	ILLEGAL	UNDEFINED	AIR-TO-AIR	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
68	ILLEGAL	UNDEFINED	PRECISION BOMBING	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
69	ILLEGAL	UNDEFINED	LASER DESIGNATION	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED

5.1-996

MIL-STD-6016B

J6.0I WORD NOTES (Continued)
NOTE 2 Environment/Category - Platform Activity (Sheet 4 of 4)

PLATFORM ACTIVITY	E N V I R O N M E N T / C A T E G O R Y						
	0	1	2	3	4	5	6-7
	NO STATEMENT/ UNKNOWN	SPACE	AIR	SURFACE (MARITIME)	SUBSURFACE (MARITIME)	LAND (GROUND)	UNDEFINED
70	ILLEGAL	UNDEFINED	BEACON BOMBING	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
71	ILLEGAL	UNDEFINED	SHADOWING	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
72	ILLEGAL	UNDEFINED	COVERING	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
73	ILLEGAL	UNDEFINED	VISUAL IDENTIFICATION	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
74	ILLEGAL	UNDEFINED	HIGH ENERGY LASING	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
75 • • 114	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
115	ILLEGAL	BALLISTIC MISSILE ACTIVITY 1	AIR ACTIVITY 1	SURFACE (MARITIME) ACTIVITY 1	SUBSURFACE (MARITIME) ACTIVITY 1	LAND (GROUND) ACTIVITY 1	UNDEFINED
116	ILLEGAL	BALLISTIC MISSILE ACTIVITY 2	AIR ACTIVITY 2	SURFACE (MARITIME) ACTIVITY 2	SUBSURFACE (MARITIME) ACTIVITY 2	LAND (GROUND) ACTIVITY 2	UNDEFINED
117	ILLEGAL	BALLISTIC MISSILE ACTIVITY 3	AIR ACTIVITY 3	SURFACE (MARITIME) ACTIVITY 3	SUBSURFACE (MARITIME) ACTIVITY 3	LAND (GROUND) ACTIVITY 3	UNDEFINED
118	ILLEGAL	BALLISTIC MISSILE ACTIVITY 4	AIR ACTIVITY 4	SURFACE (MARITIME) ACTIVITY 4	SUBSURFACE (MARITIME) ACTIVITY 4	LAND (GROUND) ACTIVITY 4	UNDEFINED
119	ILLEGAL	BALLISTIC MISSILE ACTIVITY 5	AIR ACTIVITY 5	SURFACE (MARITIME) ACTIVITY 5	SUBSURFACE (MARITIME) ACTIVITY 5	LAND (GROUND) ACTIVITY 5	UNDEFINED
120	ILLEGAL	BALLISTIC MISSILE ACTIVITY 6	AIR ACTIVITY 6	SURFACE (MARITIME) ACTIVITY 6	SUBSURFACE (MARITIME) ACTIVITY 6	LAND (GROUND) ACTIVITY 6	UNDEFINED
121	ILLEGAL	BALLISTIC MISSILE ACTIVITY 7	AIR ACTIVITY 7	SURFACE (MARITIME) ACTIVITY 7	SUBSURFACE (MARITIME) ACTIVITY 7	LAND (GROUND) ACTIVITY 7	UNDEFINED
122	ILLEGAL	BALLISTIC MISSILE ACTIVITY 8	AIR ACTIVITY 8	SURFACE (MARITIME) ACTIVITY 8	SUBSURFACE (MARITIME) ACTIVITY 8	LAND (GROUND) ACTIVITY 8	UNDEFINED
123	ILLEGAL	BALLISTIC MISSILE ACTIVITY 9	AIR ACTIVITY 9	SURFACE (MARITIME) ACTIVITY 9	SUBSURFACE (MARITIME) ACTIVITY 9	LAND (GROUND) ACTIVITY 9	UNDEFINED
124	ILLEGAL	BALLISTIC MISSILE ACTIVITY 10	AIR ACTIVITY 10	SURFACE (MARITIME) ACTIVITY 10	SUBSURFACE (MARITIME) ACTIVITY 10	LAND (GROUND) ACTIVITY 10	UNDEFINED
125	ILLEGAL	BALLISTIC MISSILE ACTIVITY 11	AIR ACTIVITY 11	SURFACE (MARITIME) ACTIVITY 11	SUBSURFACE (MARITIME) ACTIVITY 11	LAND (GROUND) ACTIVITY 11	UNDEFINED
126	ILLEGAL	BALLISTIC MISSILE ACTIVITY 12	AIR ACTIVITY 12	SURFACE (MARITIME) ACTIVITY 12	SUBSURFACE (MARITIME) ACTIVITY 12	LAND (GROUND) ACTIVITY 12	UNDEFINED
127	ILLEGAL	RESET TO NO STATEMENT	RESET TO NO STATEMENT	RESET TO NO STATEMENT	RESET TO NO STATEMENT	RESET TO NO STATEMENT	UNDEFINED

5.1-997

MIL-STD-6016B

J6.0I WORD NOTES (Continued)

NOTE 3 Environment/Category - Activity Amplification Index (Sheet 1 of 4)

ENV/CAT ACT AMP INDEX	0 NO STATEMENT/ UNKNOWN	1 SPACE	2 AIR	3 SURFACE (MARITIME)	4 SUBSURFACE (MARITIME)	5 LAND (GROUND)	6-7 UNDEFINED
0	NO STATEMENT	NO STATEMENT	NO STATEMENT	NO STATEMENT	NO STATEMENT	NO STATEMENT	UNDEFINED
1	ILLEGAL	UNDEFINED	INVESTIGATING	ATTACKING	TARGETING	INVESTIGATING	UNDEFINED
2	ILLEGAL	UNDEFINED	ASSIGNED TO DESTROY	MISSILE	MISSILE OPERATIONS, UNSPECIFIED	ASSIGNED TO DESTROY	UNDEFINED
3	ILLEGAL	UNDEFINED	WEAPONS ARMED	GUN FIRING	MISSILE OPERATIONS, SIMULATED FIRING	WEAPONS ARMED	UNDEFINED
4	ILLEGAL	UNDEFINED	VISUAL CONTACT	MINE LAYING	TORPEDO OPERATIONS, LIVE FIRING/ATTACK	VISUAL CONTACT	UNDEFINED
5	ILLEGAL	UNDEFINED	RADAR INFRARED LOCK-ON	FIRE CONTROL TRACKING	TORPEDO OPERATIONS, UNSPECIFIED	RADAR LOCK-ON	UNDEFINED
6	ILLEGAL	UNDEFINED	WEAPONS RELEASE IMMINENT	WEAPON ASSIGNED	TORPEDO OPERATIONS, SIMULATED/EXERCISE	WEAPONS RELEASE IMMINENT	UNDEFINED
7	ILLEGAL	UNDEFINED	WEAPONS RELEASED	AIR OPERATIONS (LAUNCH, RECOVERY)	TORPEDO OPERATIONS, ATTACK/LIVE	WEAPONS RELEASED	UNDEFINED
8	ILLEGAL	UNDEFINED	SUCCESSFUL	ELECTRONIC COUNTERMEASURES JAMMING	MINE LAYING	SUCCESSFUL	UNDEFINED
9	ILLEGAL	UNDEFINED	UNSUCCESSFUL	EVASION/ EVASIVE TACTICS	EVASION/ EVASIVE TACTICS	UNSUCCESSFUL	UNDEFINED
10	ILLEGAL	UNDEFINED	ENGAGEMENT BROKEN	ENGAGEMENT BROKEN	REPAIRING DAMAGE	ENGAGEMENT BROKEN	UNDEFINED
11	ILLEGAL	UNDEFINED	SCRAMBLE	ACOUSTIC JAMMING	ARRIVING/ RENDEZVOUSING	UNDEFINED	UNDEFINED
12	ILLEGAL	UNDEFINED	ENROUTE	ARRIVING/ RENDEZVOUSING	COMMAND VESSEL	ENROUTE	UNDEFINED

J6.0I WORD NOTES (Continued)
NOTE 3 Environment/Category - Activity Amplification Index (Sheet 2 of 4)

ENV/CAT ACT AMP INDEX	0 NO STATEMENT/ UNKNOWN	1 SPACE	2 AIR	3 SURFACE (MARITIME)	4 SUBSURFACE (MARITIME)	5 LAND (GROUND)	6-7 UNDEFINED
13	ILLEGAL	UNDEFINED	ON STATION	COMMAND VESSEL	CONVOYING/ESCORTING	UNDEFINED	UNDEFINED
14	ILLEGAL	UNDEFINED	RENDEZVOUS	CONVOYING	DEAD IN THE WATER, SURFACED	UNDEFINED	UNDEFINED
15	ILLEGAL	UNDEFINED	MARSHALLING	DEAD IN THE WATER	DEAD IN THE WATER, SUBMERGED	UNDEFINED	UNDEFINED
16	ILLEGAL	UNDEFINED	RETURN TO BASE	DECOY	DEPARTING	UNDEFINED	UNDEFINED
17	ILLEGAL	UNDEFINED	REFUELING	DEPARTING	ENROUTE/TRANSITING	UNDEFINED	UNDEFINED
18	ILLEGAL	UNDEFINED	JAMMING, GENERAL	ELECTRONIC COUNTER COUNTERMEASURES	ELECTRONIC WARFARE SUPPORT MEASURES	JAMMING, GENERAL	UNDEFINED
19	ILLEGAL	UNDEFINED	JAMMING, RADAR	ENROUTE/ TRANSITING	AIR CONTROL UNIT	JAMMING, RADAR	UNDEFINED
20	ILLEGAL	UNDEFINED	JAMMING, FIRE CONTROL SYSTEM AIRBORNE INTERCEPT	ELECTRONIC WARFARE SUPPORT MEASURES/SIGNAL INTELLIGENCE	OBSERVING/MONITORING, AS A NEUTRAL OBSERVER	JAMMING, FIRE CONTROL SYSTEM AIRBORNE INTERCEPT	UNDEFINED
21	ILLEGAL	UNDEFINED	JAMMING, IFF/SIF	AIR CONTROL UNIT	ON STATION	JAMMING, IFF/SIF	UNDEFINED
22	ILLEGAL	UNDEFINED	JAMMING, COMMUNICATION	ATTACK AIR CONTROL UNIT	PATROL, SEARCH/ RECONNAISSANCE SCOUTING	JAMMING, COMMUNICATION	UNDEFINED
23	ILLEGAL	UNDEFINED	DROPPING CHAFF	ANTISUBMARINE WARFARE AIR CONTROL UNIT	RELIEVING	UNDEFINED	UNDEFINED
24	ILLEGAL	UNDEFINED	DISPERSAL	REST AND RECREATION	REPLENISHING	UNDEFINED	UNDEFINED

5.1-999

MIL-STD-6016B

J6.0I WORD NOTES (Continued)

NOTE 3 Environment/Category - Activity Amplification Index (Sheet 3 of 4)

ENV/CAT ACT AMP INDEX	0 NO STATEMENT/ UNKNOWN	1 SPACE	2 AIR	3 SURFACE (MARITIME)	4 SUBSURFACE (MARITIME)	5 LAND (GROUND)	6-7 UNDEFINED
25	ILLEGAL	UNDEFINED	FLUSH	FISHING	SCREEN	UNDEFINED	UNDEFINED
26	ILLEGAL	UNDEFINED	ANTISUBMARINE WARFARE SEARCH ATTACK	HARASSING	SINKING	UNDEFINED	UNDEFINED
27	ILLEGAL	UNDEFINED	ELECTRONIC COUNTER COUNTERMEASURES	OCEANOGRAPHIC	TATTLETALE/ SHADOW	UNDEFINED	UNDEFINED
28	ILLEGAL	UNDEFINED	SHADOW	ICE BREAKING	TROOP OPERATIONS	UNDEFINED	UNDEFINED
29	ILLEGAL	UNDEFINED	INTERVENE	INTELLIGENCE COLLECTION	TOWING	UNDEFINED	UNDEFINED
30	ILLEGAL	UNDEFINED	UNDEFINED	INTRUDER	UNDER TOW	UNDEFINED	UNDEFINED
31	ILLEGAL	UNDEFINED	UNDEFINED	MINE HUNTING	UNDEFINED	UNDEFINED	UNDEFINED
32	ILLEGAL	UNDEFINED	UNDEFINED	MINE SWEEPING/ CLEARING	UNDEFINED	UNDEFINED	UNDEFINED
33	ILLEGAL	UNDEFINED	UNDEFINED	NAVAL GUNFIRE SUPPORT	UNDEFINED	UNDEFINED	UNDEFINED
34	ILLEGAL	UNDEFINED	UNDEFINED	OBSERVING/ MONITORING, AS A NEUTRAL OBSERVER	UNDEFINED	UNDEFINED	UNDEFINED
35	ILLEGAL	UNDEFINED	UNDEFINED	ON STATION	UNDEFINED	UNDEFINED	UNDEFINED
36	ILLEGAL	UNDEFINED	UNDEFINED	PATROL, SEARCH/ TRACKING/ RECONNAISSANCE/ SCOUTING	UNDEFINED	UNDEFINED	UNDEFINED
37	ILLEGAL	UNDEFINED	UNDEFINED	PIRAZ UNIT	UNDEFINED	UNDEFINED	UNDEFINED

5.1-1000

MIL-STD-6016B

J6.0I WORD NOTES (Continued)

NOTE 3 Environment/Category - Activity Amplification Index (Sheet 4 of 4)

ENV/CAT ACT AMP INDEX	0 NO STATEMENT/ UNKNOWN	1 SPACE	2 AIR	3 SURFACE (MARITIME)	4 SUBSURFACE (MARITIME)	5 LAND (GROUND)	6-7 UNDEFINED
38	ILLEGAL	UNDEFINED	UNDEFINED	REPAIRING DAMAGE	UNDEFINED	UNDEFINED	UNDEFINED
39	ILLEGAL	UNDEFINED	UNDEFINED	RELIEVING	UNDEFINED	UNDEFINED	UNDEFINED
40	ILLEGAL	UNDEFINED	UNDEFINED	REPLENISHING	UNDEFINED	UNDEFINED	UNDEFINED
41	ILLEGAL	UNDEFINED	UNDEFINED	SEARCH ATTACK UNIT	UNDEFINED	UNDEFINED	UNDEFINED
42	ILLEGAL	UNDEFINED	UNDEFINED	SCREEN	UNDEFINED	UNDEFINED	UNDEFINED
43	ILLEGAL	UNDEFINED	UNDEFINED	SINKING	UNDEFINED	UNDEFINED	UNDEFINED
44	ILLEGAL	UNDEFINED	UNDEFINED	TATTLETALE/ SHADOW	UNDEFINED	UNDEFINED	UNDEFINED
45	ILLEGAL	UNDEFINED	UNDEFINED	TROOP OPERATIONS	UNDEFINED	UNDEFINED	UNDEFINED
46	ILLEGAL	UNDEFINED	UNDEFINED	TOWING	UNDEFINED	UNDEFINED	UNDEFINED
47	ILLEGAL	UNDEFINED	UNDEFINED	UNDER TOW	UNDEFINED	UNDEFINED	UNDEFINED
48	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
49	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
50	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
51 • • • • 62	ILLEGAL	ACTIVITY AMPLIFICATION INDEX DEFINED BY THE JOINT OPERATIONAL COMMANDER	ACTIVITY AMPLIFICATION INDEX DEFINED BY THE JOINT OPERATIONAL COMMANDER	ACTIVITY AMPLIFICATION INDEX DEFINED BY THE JOINT OPERATIONAL COMMANDER	ACTIVITY AMPLIFICATION INDEX DEFINED BY THE JOINT OPERATIONAL COMMANDER	ACTIVITY AMPLIFICATION INDEX DEFINED BY THE JOINT OPERATIONAL COMMANDER	UNDEFINED
63	ILLEGAL	RESET TO NO STATEMENT	RESET TO NO STATEMENT	RESET TO NO STATEMENT	RESET TO NO STATEMENT	RESET TO NO STATEMENT	UNDEFINED

5.1-1001

MIL-STD-6016B

FIELD CODING FOR J6.0I				(SHEET 1)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
292	002	SPECIAL PROCESSING INDICATOR -----		INDICATES THAT A MESSAGE REQUIRES SPECIAL PROCESSING.
		SPECIAL PROCESSING NOT REQUIRED	0	
		SPECIAL PROCESSING REQUIRED	1	
710	003	RESPONSE INDICATOR -----		THIS FIELD INDICATES WHETHER OR NOT THE MESSAGE IS IN RESPONSE TO A DATA UPDATE REQUEST.
		NOT RESPONDING	0	MESSAGE IS NOT IN RESPONSE TO DATA UPDATE REQUEST.
		RESPONDING	1	MESSAGE IS IN RESPONSE TO DATA UPDATE REQUEST.
769	002	TRACK NUMBER, REFERENCE -----		A REFERENCE NUMBER USED TO ASSOCIATE INFORMATION AND DIRECTIVES WITH THE TRACK. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE- BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.
				CODING CHARACTER 00000 0

FIELD CODING FOR J6.0I

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
				00001 1
				00010 2
				00011 3
				00100 4
				00101 5
				00110 6
				00111 7
				01000 A
				01001 B
				01010 C
				01011 D
				01100 E
				01101 F
				01110 G
				01111 H
				10000 J
				10001 K
				10010 L
				10011 M
				10100 N
				10101 P
				10110 Q
				10111 R
				11000 S
				11001 T
				11010 U
				11011 V
				11100 W
				11101 X
				11110 Y
				11111 Z
		00000	0	NO STATEMENT.
		00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		00077	63	ILLEGAL.
		00100-00175	64 THROUGH 125	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		00176	126	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		00177	127	COLLECTIVE ADDRESS.
		00200-07776	128 THROUGH 4094	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL

			FIELD CODING FOR J6.0I	(SHEET 3)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		07777 0A000-0Z777	4095 4096 THROUGH 16383	INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS. ILLEGAL.
		10000-17777	16384 THROUGH 20479	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		20000-27777	32768 THROUGH 36863	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.

			FIELD CODING FOR J6.01	(SHEET 4)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		70000-77776	114688 THROUGH 118782	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
748	001	NATIONALITY/ALLIANCE OF TRACK -----		THE COUNTRY OF ORIGIN OR POLITICAL ENTITY OF A REPORTED OBJECT OR TRACK.
		NO STATEMENT	0	
		NAT/ALL-1 THROUGH NAT/ALL-28	1 THROUGH 28	THE NATION OR POLITICAL ENTITY OF THE TRACK IS TO BE DEFINED BY THE INDIVIDUAL THEATER OF OPERATION.
		DISUSED	29	
		USSR (SOVIET UNION)	30	
		NATO	31	
		BELGIUM	32	
		CYPRUS	33	
		DENMARK	34	

FIELD CODING FOR J6.0I

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
748	001	NATIONALITY/ALLIANCE OF TRACK	(CONTINUED)	

		FRANCE	35	
		GERMANY	36	
		FINLAND	37	
		GREECE	38	
		ICELAND	39	
		IRELAND	40	
		ITALY	41	
		NETHERLANDS	42	
		NORWAY	43	
		PORTUGAL	44	
		SPAIN	45	
		SWEDEN	46	
		SWITZERLAND	47	
		TURKEY	48	
		UNITED KINGDOM	49	
		ALBANIA	50	
		AUSTRIA	51	
		BULGARIA	52	
		CZECHOSLOVAKIA	53	
		DISUSED	54	
		HUNGARY	55	
		POLAND	56	
		RUMANIA	57	
		YUGOSLAVIA	58	
		CANADA	59	
		UNITED STATES OF	60	
		AMERICA		
		EGYPT	61	
		IRAN	62	
		IRAQ	63	
		ISRAEL	64	
		JORDAN	65	
		LEBANON	66	
		SAUDI ARABIA	67	
		SYRIA	68	
		ALGERIA	69	
		ETHIOPIA	70	
		LIBERIA	71	
		LIBYA	72	
		SOUTH AFRICA	73	
		INDIA	74	
		PAKISTAN	75	
		CAMBODIA	76	

FIELD CODING FOR J6.0I

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
748	001	NATIONALITY/ALLIANCE OF TRACK -----	(CONTINUED)	
		LAOS	77	
		THAILAND	78	
		VIETNAM	79	
		CHINA, PEOPLE'S REPUBLIC	80	
		CHINA, REPUBLIC	81	
		KOREA, NORTH	82	
		KOREA, REPUBLIC	83	
		JAPAN	84	
		PHILIPPINES	85	
		AUSTRALIA	86	
		NEW ZEALAND	87	
		ARGENTINA	88	
		BRAZIL	89	
		CHILE	90	
		COLUMBIA	91	
		MEXICO	92	
		PANAMA	93	
		PERU	94	
		VENEZUELA	95	
		CUBA	96	
		DOMINICAN REPUBLIC	97	
		UNITED NATIONS FORCE	98	
		KUWAIT	99	
		YEMEN ARAB REPUBLIC	100	
		GUINEA	101	
		MALAGASY (MADAGASCAR)	102	
		MOROCCO	103	
		NIGERIA	104	
		SENEGAL	105	
		ZIMBABWE	106	
		SPANISH NORTH AFRICA	107	
		SUDAN	108	
		TANZANIA	109	
		TUNISIA	110	
		UGANDA	111	
		BURMA	112	
		INDONESIA	113	
		MALAYSIA	114	
		SINGAPORE	115	
		BOLIVIA	116	
		ECUADOR	117	
		GUATEMALA	118	
		NICARAGUA	119	

FIELD CODING FOR J6.0I

(SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
748	001	NATIONALITY/ALLIANCE OF TRACK -----	(CONTINUED)	
		PARAGUAY	120	
		URUGUAY	121	
		JAMAICA	122	
		INTERNATIONAL RED CROSS	123	
		LUXEMBOURG	124	
		YEMEN PEOPLE'S DEMOCRATIC REPUBLIC	125	
		UNDEFINED	126	
		RESET TO NO STATEMENT	127	
753	001	OPERATIONAL STATUS -----		THE OPERATIONAL STATUS OF A REPORTED WEAPON OR FACILITY.
		NO STATEMENT	0	
		ABLE TO PERFORM MISSION	1	
		WEAPON SYSTEM ON ALERT	2	
		FIGHTERS HAVE SCRAMBLED	3	
		UNABLE TO PERFORM	4	
		UNABLE-WEATHER	5	
		UNABLE-BATTLE DAMAGE	6	
		UNABLE-FUEL DEPLETION	7	
		UNABLE-ORDNANCE DEPLETED	8	
		LOW FUEL STATE	9	
		UNDEFINED	10 THROUGH 14	
		RESET TO NO STATEMENT	15	CLEARs VALUE TO ZERO.

5.1-1008

MIL-STD-6016B

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: AMPLIFICATION EXTENSION WORD

< - - -

WORD DESCRIPTION

WORD NUMBER: J6.0E0

WORD TITLE: AMPLIFICATION EXTENSION WORD

REFERENCE			BIT	#	
DFI/DUI	DATA FIELD	DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD	FORMAT	0-	1 2	10
749 002	SPACE	SPECIFIC TYPE	2-	13 12	
804 001	AIR	SPECIFIC TYPE	2-	13 12	
808 001	SURFACE (MARITIME)	SPECIFIC TYPE	2-	13 12	
809 001	SUBSURFACE (MARITIME)	SPECIFIC TYPE	2-	13 12	
810 001	LAND (GROUND)	SPECIFIC TYPE	2-	13 12	
756 012	SPARE		2-	13 12	
1661 002	TYPE	MODIFICATION	14-	18 5	
769 010	TRACK	NUMBER, OBJECTIVE	19-	37 19	
754 001	LOCAL	DISCRETE IDENTIFIER	38-	49 12	
756 001	SPARE (SP)		50	1	
769 031	TRACK	NUMBER, CONTROLLING AGENCY OF TN REFERENCE	51-	69 19	

FIELD CODING FOR J6.0E0

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
749	002	SPACE SPECIFIC TYPE -----		THE SPECIFIC TYPE OF A POINT OR TRACK WITH AN ENVIRONMENT/CATEGORY OF SPACE.
		NO STATEMENT	0	
		FROG-7	1	
		HONEST JOHN	2	
		SAKR 80	3	
		SS-21 MOD 2	4	
		SS-21 MOD 3	5	
		HAFT-I	6	
		UNDEFINED	7 THROUGH 78	
		SHORT RANGE (0-65 DM)	79	
		ALACRAN	80	
		CHENG FENG	81	
		CONDOR	82	
		HAFT II	83	
		IRAN-130	84	
		LANCE	85	
		MB/EE-150	86	
		MB/EE-300	87	
		UNDEFINED	88	
		PRITHVI	89	
		SS-1B (SCUD-A)	90	
		SS-1C (SCUD-B)	91	
		SS-21 (SCARAB)	92	
		SS-300	93	
		B-610/CJS-98 (BG510)	94	
		NHK-I	95	
		NHK-II (HYON MU)	96	
		UNDEFINED	97 THROUGH 168	
		SHORT-MEDIUM RANGE (66-200 DM)	169	
		AL-HUSAYN	170	
		UNDEFINED	171	
		HAFT III	172	
		M-9	173	
		M-11	174	
		MB/EE-600	175	
		SCUD-C	176	
		SS-23 (SPIDER)	177	
		AL HUSSEIN	178	
		UNDEFINED	179 THROUGH 242	
		MEDIUM RANGE (201-400 DM)	243	
		AL-ABBAS	244	

5.1-1012

MIL-STD-6016B

FIELD CODING FOR J6.0E0

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
749	002	SPACE SPECIFIC TYPE	(CONTINUED)	

		JERICH0-I	245	
		AL HIJARAN	246	
		SONDA IV	247	
		UNDEFINED	248 THROUGH 330	
		MEDIUM-EXTENDED RANGE	331	
		(401-600 DM)		
		AL-FATAH	332	
		BADR-2000	333	
		CONDOR II	334	
		CSS-1	335	
		MB/EE-1000	336	
		SKY HORSE	337	
		SS-12A (SCALEBOARD A)	338	
		SS-12B (SCALEBOARD B)	339	
		SS1000	340	
		TIEN MA	341	
		UNDEFINED	342 THROUGH 416	
		EXTENDED RANGE (601-800	417	
		DM)		
		ARNISTON	418	
		CAPRICORNIO	419	
		JERICH0 II	420	
		NODONG-1	421	
		SS-N-5 (SERB)	422	
		UNDEFINED	423 THROUGH 496	
		EXTENDED-LONG RANGE	497	
		(801-1000 DM)		
		AGNI	498	
		AL/ABED	499	
		CC-4 (SANDAL)	500	
		CSS-5	501	
		UNDEFINED	502 THROUGH 575	
		LONG RANGE (1001-1350	576	
		DM)		
		CHEVALINE	577	
		CSS-2	578	
		CSS-3	579	
		CSS-4	580	
		CSS-N-3	581	
		M-4 SLBM	582	
		M-5 SLBM	583	
		M-20 SLBM	584	
		MIDGETMAN	585	

5.1-1013

MIL-STD-6016B

FIELD CODING FOR J6.0E0

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
749	002	SPACE SPECIFIC TYPE	(CONTINUED)	

		MINUTEMAN I	586	
		MINUTEMAN II	587	
		PEACEKEEPER	588	
		POLARIS A-3	589	
		POSEIDON C-3	590	
		SS-11 (SEGO)	591	
		SS-13 (SAVAGE)	592	
		SS-17 (SPANKER) MOD 1	593	
		SS-17 (SPANKER) MOD 2	594	
		SS-17 (SPANKER) MOD 3	595	
		SS-18 (SATAN) MOD 1	596	
		SS-18 (SATAN) MOD 2	597	
		SS-18 (SATAN) MOD 3	598	
		SS-20 (SABER)	599	
		SS-24 (SCALPEL)	600	
		SS-25 (SICKLE)	601	
		SS-N-6 (SAWFLY)	602	
		SS-N-8	603	
		SS-N-17 (SNIPE)	604	
		SS-N-18 (STINGRAY)	605	
		SS-N-20 (STURGEON)	606	
		SS-N-23 (SKIFF)	607	
		SSBS S-3	608	
		SSBS S-4	609	
		TRIDENT I (C-4)	610	
		TRIDENT II (D-5)	611	
		MODIFIED CSS-5	612	
		SS-19 MOD 3	613	
		UNDEFINED	614	
		NEW SOLID SLBM	615	
		CSS-NX-3	616	
		M4B	617	
		M45	618	
		UNDEFINED	619 THROUGH 786	
		>1350 DM	787	
		ABM-1B (GALOSH)	788	
		ARROW	789	
		ASTER	790	
		CORPS SAM	791	
		ERINT	792	
		HAWK	793	
		PATRIOT	794	
		SA-10 (GRUMBLE)	795	

5.1-1014

MIL-STD-6016B

FIELD CODING FOR J6.0E0

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

749	002	SPACE SPECIFIC TYPE	(CONTINUED)	
-----	-----	---------------------	-------------	--

		SA-12A (GLADIATOR)	796	
		SA-12B (GIANT)	797	
		SA-N-6 (GRUMBLE)	798	
		SH-08 (GAZELLE)	799	
		STANDARD MISSILE BLOCK	800	
		IVA		
		THAAD	801	
		SM-2 BLOCK IV	802	
		SM-3 LEAP	803	
		UNDEFINED	804 THROUGH 876	
		INTERCEPTOR	877	
		OPERATIONAL COMMANDER	878 THROUGH 941	
		DEFINED 1-64		
		UNDEFINED	942 THROUGH 1022	
		BALLISTIC MISSILE	1023	
		GENERAL		
		UNDEFINED	1024 THROUGH 2046	
		SPACE GENERAL	2047	
		UNDEFINED	2048 THROUGH 4093	
		RESET TO NO STATEMENT	4094	
		UNDEFINED	4095	

804	001	AIR SPECIFIC TYPE		THE SPECIFIC TYPE OF POINT OR TRACK WITH AN ENVIRONMENT/CATEGORY OF AIR.
-----	-----	-------------------	--	--

		NO STATEMENT	0	

		FIGHTER		

		F-4 PHANTOM II	1	
		F-5 TIGER II	2	
		F-8 CRUSADER	3	
		F-14 TOMCAT	4	
		F-15 EAGLE	5	
		F-16 FIGHTING FALCON	6	
		F-101 VOODOO	7	
		F-104 STARFIGHTER	8	
		F-105 THUNDERCHIEF	9	
		F-106 DELTA DART	10	
		F-111 (GENERAL DYNAMICS)	11	
		F/A-18 HORNET	12	

5.1-1015

MIL-STD-6016B

FIELD CODING FOR J6.0E0

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		EFA	13	
		F-102	14	
		F-100	15	
		DISUSED	16	
		DISUSED	17	
		COMMANDO	18	
		DISUSED	19	
		DISUSED	20	
		J-35 DRAKEN	21	
		JAGUAR	22	
		SUPER ETENDARD	23	
		DISUSED	24 THROUGH 26	
		F-1 (MITSUBISHI)	27	
		F-35XD DRAKEN	28	
		DISUSED	29	
		HF-24 MARUT (WIND SPIRIT)	30	
		JA37 VIGGEN	31	
		DISUSED	32	
		SF-5 FREEDOM FIGHTER	33	
		IAR-91 ORAO	34	
		AJEET INVINCIBLE	35	
		KFIR C2	36	
		MIRAGE F1	37	
		MIRAGE 3	38	
		MIRAGE 5	39	
		MIRAGE 50	40	
		MIRAGE 2000	41	
		DISUSED	42	
		DISUSED	43	
		ALPHA JET	44	
		KEFIR	45	
		F-6 FARMER	46	
		F-8 FISHBED	47	
		F-9 FANTAN	48	
		F-12 (CHINA)	49	
		SU-7 FITTER	50	
		SU-9 FISHPOT	51	
		SU-11 FLAGON	52	
		SU-15 FLAGON	53	
		SU-17 FITTER	54	
		SU-19 FENCER	55	
		SU-20 FITTER	56	

5.1-1016

MIL-STD-6016B

FIELD CODING FOR J6.0E0

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		SU-22 FITTER	57	
		SU-24 FENCER	58	
		SU-25 FROGFOOT	59	
		TU-28 FIDDLER	60	
		TU-128 FIDDLER	61	
		MIG-21 FISHBED	62	
		MIG-23 FLOGGER	63	
		MIG-25 FOXBAT	64	
		MIG-27 FLOGGER	65	
		YAK-28 FIREBAR	66	
		YAK-36 FORGER	67	
		AAF "RAM-J"	68	
		MIG-15 FAGOT	69	
		MIG-17 FRESCO	70	
		MIG-19 FARMER	71	
		SU-27 FLANKER	72	
		MIG-29 FULCRUM	73	
		MIG-31 FOXHOUND	74	
		YAK-38 FORGER-A	75	
		F-22 RAPTOR	76	
		F-84 THUNDERSTREAK	77	
		F-86 SABRE	78	
		F/A2 SEA HARRIER	79	
		IDF CHING-KUO (TAIWAN)	80	
		JAS-39 GRIPPEN	81	
		JIAN JI-7	82	
		JIAN JI-8-2	83	
		JOINT STRIKE FIGHTER	84	
		KFIR C7	85	
		KFIR 2000	86	
		RAFALE	87	
		SU-30	88	
		SU-33 (SU-27K)	89	
		SU-34	90	
		SU-35	91	
		SU-37	92	
		SU-39	93	
		YAK-141 FREESTYLE	94	
		F-5 FRESCO	95	
		F-7 FISHBED	96	
		J-9	97	
		RT33	98	
		CF-188 HORNET	99	

FIELD CODING FOR J6.0E0

(SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		UNDEFINED	100	
		TORNADO F3	101	
		SEA HARRIER	102	
		F-5 NORTHROP	103	
		UNDEFINED	104 THROUGH 254	
		FIGHTER GENERAL	255	

		BOMBERS/ATTACK		

		A-4 SKYHAWK	256	
		A-6 INTRUDER	257	
		A-7 CORSAIR II	258	
		A-10 THUNDERBOLT II	259	
		A-37 DRAGONFLY	260	
		B-1 (ROCKWELL)	261	
		B-52 STRATOFORTRESS	262	
		AC-130 HERCULES	263	
		AV-8 HARRIER	264	
		F/A-18 HORNET	265	
		FB-111 (GENERAL DYNAMICS)	266	
		A-1	267	
		TA-28	268	
		DISUSED	269	
		AC-47	270	
		AC-119	271	
		AC-124	272	
		ALPHA JET	273	
		DISUSED	274 THROUGH 276	
		35XD DRAKEN	277	
		J-1 HAWK	278	
		J-1 JAESTREB	279	
		S-2	280	
		AJ37 VIGGEN	281	
		HA220 SUPER SAETA	282	
		M.B.326 (AERMACCHI)	283	
		M.B.339 (AERMACCHI)	284	
		SF 260 WARRIER	285	
		SK 60 (SAAB)	286	
		BAC 167 STRIKEMASTER	287	
		TORNADO GR-1 (IDS)	288	

5.1-1018

MIL-STD-6016B

FIELD CODING FOR J6.0E0

(SHEET 8)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		IL-28 BEAGLE	289	
		MI-4 BISON	290	
		TU-16 BADGER	291	
		TU-22 BLINDER	292	
		TU-22M BACKFIRE	293	
		TU-95 BEAR	294	
		TU-142 BEAR	295	
		YAK-28 BREWER	296	
		SUPER ENTENDARD	297	
		TU-160 BLACKJACK	298	
		AMX	299	
		FRS1 SEA HARRIER	300	
		FRS2 SEA HARRIER	301	
		FRS51 SEA HARRIER	302	
		F-117 NIGHTHAWK	303	
		G4 SUPER GALEB	304	
		G91Y	305	
		HAWK-2000	306	
		HAWK-100	307	
		HAWK-200	308	
		HAWK-50	309	
		HAWK-60	310	
		IA-58 PUCARA	311	
		IAR-93 ORAO	312	
		IAR-99 SOIM	313	
		JIAN JI-5M	314	
		A-5 FANTAN	315	
		L59 ALBATROS	316	
		B-2 SPIRIT	317	
		B-7 HONGZHA	318	
		1050E	319	
		A3 LEI MING	320	
		HARRIER GR4/7	321	
		TORNADO GR4	322	
		AV-8B HARRIER PLUS	323	
		CF-188 HORNET	324	
		RAFALE	325	
		UNDEFINED	326 THROUGH 510	
		BOMBER/ATTACK GENERAL	511	

FIELD CODING FOR J6.0E0

(SHEET 9)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		PATROL/RECON/ELECTRONIC/ TANKER/GENERAL		

		E-2 HAWKEYE	512	
		E-3 SENTRY (AWACS)	513	
		E-4 NEACP	514	
		EA-3	515	
		EA-6 PROWLER	516	
		EB-57 (DOUGLAS)	517	
		EC-130 HERCULES	518	
		EC-135 (BOEING)	519	
		EF-4 WILD WEASEL	520	
		EF-111 (GENERAL DYNAMICS)	521	
		EP-3 ORION	522	
		KA-3 (DOUGLAS)	523	
		KA-6 (GRUMMAN)	524	
		KC-10 EXTENDER	525	
		KC-130 HERCULES	526	
		KC-135 STRATOTANKER	527	
		O-1 BIRD DOG	528	
		O-2 (CESSNA)	529	
		OV-1 MOHAWK	530	
		OV-10 BRONCO	531	
		P-2 NEPTUNE	532	
		P-3 ORION	533	
		RC-130 HERCULES	534	
		RC-135 (BOEING)	535	
		RF-4 PHANTOM II	536	
		RF-5 (NORTHROP)	537	
		RF-8 CRUSADER	538	
		RF-14 TOMCAT	539	
		RF-104 STARFIGHTER	540	
		RP-3 ORION	541	
		RU-21 UTE	542	
		S-2 TRACKER	543	
		S-3 VIKING	544	
		SR-71 BLACKBIRD	545	
		U-2 (LOCKHEED)	546	
		U-4 AERO COMMANDER	547	
		U-5 H-500 TWIN	548	

FIELD CODING FOR J6.0E0

(SHEET 10)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		U-8 SEMINOLE	549	
		U-10 COURIER	550	
		UC-12 HURON	551	
		U-21 UTE	552	
		US-3 VIKING	553	
		OA-37 DRAGONFLY	554	
		TR-1	555	
		WC-130 HERCULES	556	
		E-1 TRACER	557	
		EB-66	558	
		EC-121	559	
		RA-3	560	
		SEA SCAN	561	
		FALCON 20 GUARDIAN	562	
		BR 1150 ATL1	563	
		RF-35XD DRAKEN	564	
		BN-2 MARITIME DEFENDER	565	
		DISUSED	566	THROUGH 567
		CP-140 AURORA	568	
		HS.748 COASTGUARDER	569	
		HS.801 NIMROD	570	
		DISUSED	571	
		MK.3	572	
		RJ-1 HAWK	573	
		RJ-1 JAESTREB	574	
		SS-2	575	
		PEACE SENTINEL	576	
		KC-97	577	
		AU-24	578	
		AU-23	579	
		U-21	580	
		U-17	581	
		HU-16	582	
		U-9	583	
		U-3	584	
		RU-21	585	
		NKC-135	586	
		RF-101	587	
		RF-111	588	
		RB-57	589	
		RB-66	590	
		RC-121	591	
		BE-12 MAIL	592	

FIELD CODING FOR J6.0E0

(SHEET 11)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		IL-38 MAY	593	
		TU-126 MOSS	594	
		BE-6	595	
		VC-10 (TANKER)	596	
		AN-12 CUB-A (ELINT)	597	
		AN-12 CUB-C (EA)	598	
		AN-12 CUB-D (EA)	599	
		IL-20 COOT-A (ELINT)	600	
		IL-76 MAINSTAY	601	
		E-8 (J STARS)	602	
		TORNADO ECR	603	
		E-6 MERCURY	604	
		EMB-111	605	
		MU-2S	606	
		A40 ALBATROS	607	
		BE42 ALBATROS	608	
		CL215 AMPHIBIAN	609	
		IAI 1125	610	
		IL22 COOT B	611	
		J32 LANSEN	612	
		SH5 HARBIN	613	
		TIER1	614	
		TIER2	615	
		TIER3	616	
		US1 (SHIN)	617	
		C-212 CASA	618	
		CESSNA 550 CITATION II	619	
		CESSNA 560 CITATION V	620	
		CL 215 CANADAIR	621	
		DORNIER 27	622	
		F-27 FOKKER	623	
		NIMROD MRA4	624	
		CP-140A AURORA/ARCTURUS	625	
		RC-135 RIVET JOINT	626	
		ATL 2	627	
		ETENDARD IV P	628	
		ALIZE	629	
		FALCON 50	630	
		MIRAGE IV	631	
		MIRAGE 2000	632	
		BR 1150 GE ATL ASW	633	
		BR 1150 GE ATL SIGINT	634	
		C-130 HERCULES TANKER	635	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		ASTOR	636	
		UNDEFINED	637 THROUGH 761	
		TANKER	762	
		RECONNAISSANCE (RECON)	763	
		ELECTRONIC WARFARE (EW)	764	
		ASW	765	
		AEW AND C	766	
		MISCELLANEOUS GENERAL	767	

		TRAINER		

		T-2 BUCKEYE	768	
		T-28 TROJAN	769	
		T-29 (CONVAIR)	770	
		T-34 MENTOR	771	
		T-37 TWEET	772	
		T-38 TALON	773	
		T-39 SABERLINER	774	
		T-41 MESCALERO	775	
		T-42 CONCHISE	776	
		T-43 (BOEING)	777	
		T-44 KING AIR	778	
		TA-4 SKYHAWK	779	
		TA-7 CORSAIR II	780	
		T-33	781	
		ALPHA JET	782	
		B3LA (SAAB)	783	
		C-101 AVIOJET	784	
		G2-A GALEB	785	
		G2-A SEAGULL	786	
		L-29 DELFIN	787	
		L-29 MAYA	788	
		L-39 ALBATROS	789	
		L-70 MILTRAINER	790	
		L-450	791	
		P.55 (PARTENAVIA)	792	
		T-2 (MITSUBISHI)	793	
		CM 170 MAGISTER	794	
		M.B.339 (AERMACCHI)	795	
		T-2 (MITSUBISHI)	796	
		CM AU/ MAGISTER	797	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		M.B.339 (AERMACCHI)	798	
		SF-260 (SIAI-MARCHETTI)	799	
		SH 37 VIGGEN	800	
		QH-50 DRAKEN	801	
		SK 37 VIGGEN	802	
		SK 60 (SAAB)	803	
		TB30 EPSILON	804	
		TF-35XD	805	
		TJ-1 HAWK	806	
		TJ-1 JASTRAEB	807	
		TS.11 SPARK	808	
		AW1-2 FAN TRAINER	809	
		DISUSED	810	
		HJT-16 KIRAN	811	
		MBB223 FLAMINGO	812	
		SU-11 MAIDEN	813	
		SU-15	814	
		MIG-15 MIDGET	815	
		MIG-17	816	
		MIG-21 MONGOL	817	
		MIG-23	818	
		MIG-25	819	
		YAK-11 MOOSE	820	
		YAK-18 MAX	821	
		YAK-28 MAESTRO	822	
		TF-104 STARFIGHTER	823	
		T-46A	824	
		EMB-312 TOUCAN	825	
		T-45 GOSHAWK	826	
		T-47	827	
		AS202	828	
		CT114 TUTOR	829	
		G91T (FIAT JET 1)	830	
		K8 (NAMC)	831	
		L70 VINKA	832	
		STRIKEMASTER (BAE)	833	
		T1 JAYHAWK	834	
		T4 (KAWASAKI)	835	
		CT-142 DASH 8	836	
		B-55 BARON	837	
		F-33 BONANZA	838	
		839 PILLAN-TAMIZ	839	
		CT-133 SILVERSTAR	840	

FIELD CODING FOR J6.0E0

(SHEET 14)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		UNDEFINED	841 THROUGH 1022	
		TRAINER GENERAL	1023	

		TRANSPORT/AIRLINER		

		C-1 (GRUMMAN COD)	1024	
		C-2 GREYHOUND	1025	
		C-5 GALAXY	1026	
		C-7 CARIBOU	1027	
		C-9 NIGHTINGALE	1028	
		C-12 HURON	1029	
		C-123 PROVIDER	1030	
		C-130 HERCULES	1031	
		C-135 STRATOLIFTER	1032	
		C-140 JETSTAR	1033	
		C-141 STARLIFTER	1034	
		HC-130 HERCULES	1035	
		VC-6 KING AIR	1036	
		VC-9 SKYTRAIN II	1037	
		VC-11 GULFSTREAM	1038	
		VC-137 (BOEING)	1039	
		707 (BOEING)	1040	
		720 (BOEING)	1041	
		727 (BOEING)	1042	
		737 (BOEING)	1043	
		747 (BOEING)	1044	
		757 (BOEING)	1045	
		767 (BOEING)	1046	
		L-100 HERCULES	1047	
		L-1011 TRI STAR	1048	
		DC-8 (DOUGLAS)	1049	
		DC-9 (DOUGLAS)	1050	
		DC-10 (DOUGLAS)	1051	
		C-119	1052	
		DC-130	1053	
		HC-97	1054	
		C-JM	1055	
		C-54	1056	
		C-97	1057	
		C-118	1058	
		C-119	1059	

FIELD CODING FOR J6.0E0

(SHEET 15)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		C-121	1060	
		C-124	1061	
		C-131	1062	
		C-133	1063	
		VC-47	1064	
		CV-54	1065	
		CV-140	1066	
		ARAVA	1067	
		CONCORDE	1068	
		ISLANDER	1069	
		SKYVAN	1070	
		TRIDENT	1071	
		A300 AIRBUS	1072	
		A310 AIRBUS	1073	
		C-1 (KAWASKI)	1074	
		C-160 TRANSALL	1075	
		C.207 AZOR	1076	
		C-212 AVIOCAR	1077	
		F27 FRIENDSHIPS	1078	
		F28 FELLOWSHIP	1079	
		G222 SAMA	1080	
		AW.660 ARGOSY	1081	
		BAC111 ONE-ELEVEN	1082	
		DHC-5 BUFFALO	1083	
		DHC-7 DASH	1084	
		AN-2 COLT	1085	
		AN-10 CAT	1086	
		AN-12 CUB	1087	
		AN-14 CLOD	1088	
		AN-22 COCK	1089	
		AN-24 COKE	1090	
		AN-26 CURL	1091	
		AN-28 CASK	1092	
		AN-30 CLANK	1093	
		AN-32 CLINE	1094	
		AN-40 (VERY LARGE TURBO-PROP)	1095	
		AN-72 COALER	1096	
		IL-12 COACH	1097	
		IL-18 COOT	1098	
		IL-62 CLASSIC	1099	
		IL-76 CANDID	1100	
		IL-86 CAMBER	1101	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		TU-114 CLEAT	1102	
		TU-134 CRUSTY	1103	
		TU-144 CHARGER	1104	
		TU-154 CARELESS	1105	
		YAK-40 CODDLING	1106	
		YAK-42 CLOBBER	1107	
		TU-104	1108	
		YAK-27	1109	
		IL-38	1110	
		DISUSED	1111	
		DO-228 LT (TRANSPORT)	1112	
		DISUSED	1113	
		AN-74	1114	
		AN-124 CONDOR	1115	
		A320 AIRBUS	1116	
		A321 AIRBUS	1117	
		A330 AIRBUS	1118	
		A340 AIRBUS	1119	
		AN-70	1120	
		AN-225 COSSACK	1121	
		BAE-125-600	1122	
		BAE146	1123	
		777 (BOEING)	1124	
		C-17 GLOBEMASTER III	1125	
		C-20 GULFSTREAM 3/4	1126	
		C-21 LEARJET 35	1127	
		C-22	1128	
		C-23 SHERPA/SHORTS 330	1129	
		C-26 METRO 3	1130	
		YS 11 (NAMC)	1131	
		CL-600 CHALLENGER	1132	
		CL-601 CHALLENGER	1133	
		CN-235M (AIRTECH)	1134	
		EMB-120 BRASILLIA ADV	1135	
		EMB-145 AMAZON	1136	
		IL-78 MIDAS	1137	
		MD-11	1138	
		MD-80	1139	
		MD-90	1140	
		PD-808	1141	
		TU-44	1142	
		V-22 OSPREY	1143	
		VC-25	1144	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		XC-2	1145	
		1124 (IAI)	1146	
		1900 (BEECH)	1147	
		330 (SHORTS)	1148	
		580 (CONVAIR)	1149	
		ATR42	1150	
		B55 BARON	1151	
		BN2 ISLANDER	1152	
		C46 COMMANDO	1153	
		CARAVELL (SUD)	1154	
		CC109 (CANADAIR)	1155	
		CHALLENGER (CANADAIR)	1156	
		DHC2	1157	
		DHC6 TWIN OTTER	1158	
		DHC8	1159	
		EMB110 BANDEIRANTE	1160	
		EMB121	1161	
		FALCON 200/FALCON 20	1162	
		FALCON 50	1163	
		FALCON 900	1164	
		FH227 FRIENDSHIP	1165	
		FOKKER 100	1166	
		FOKKER 50	1167	
		FOKKER 60	1168	
		FOKKER 70	1169	
		GROB G850	1170	
		GULFSTREAM 1	1171	
		GULFSTREAM 2	1172	
		JETSTREAM	1173	
		JETSTREAM 31	1174	
		KING AIR	1175	
		L410 TURBOJET	1176	
		LEARJET 23	1177	
		LEARJET 24	1178	
		LEARJET 25 (IMPROVED VER	1179	
		28)		
		LEARJET 35/36	1180	
		LEARJET 55 (IMPROVED VER	1181	
		28)		
		LEARJET 60	1182	
		MERLIN 2	1183	
		MERLIN 3	1184	
		MERLIN 4	1185	

FIELD CODING FOR J6.0E0

(SHEET 18)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		METRO 3	1186	
		SAAB 2000	1187	
		SAAB 340	1188	
		SABRELINER	1189	
		U6 BEAVER	1190	
		VISCOUNT	1191	
		W3 SOKOL	1192	
		Y11 (HAMC)	1193	
		Y12 (HAMC)	1194	
		Y5	1195	
		CC-115 BUFFALO	1196	
		CC-130 HERCULES	1197	
		CC-150 POLARIS	1198	
		C-235 CASA	1199	
		CC-138 TWIN OTTER	1200	
		DO-228 LM (POLLUTION CONTROL)	1201	
		UNDEFINED	1202 THROUGH 1277	
		LIGHT CIVIL	1278	
		TRANSPORT/AIRLINER	1279	
		GENERAL		

		HELICOPTERS		

		AH-1 COBRA	1280	
		AH-64 APACHE	1281	
		CH-3 (SIKORSKY)	1282	
		CH-46 (SEA KNIGHT)	1283	
		CH-47 CHINOOK	1284	
		CH-53 SEA STALLION	1285	
		CH-54 LARKE (SKYCRANE)	1286	
		EH-60 QUICK FOX	1287	
		HH-1 IROQUOIS	1288	
		HH-2 SEA SPRITE	1289	
		HH-3 JOLLY GREEN	1290	
		HH-52 (SIKORSKY)	1291	
		HH-53 (SIKORSKY)	1292	
		OH-6 (HUGHES)	1293	
		OH-58 KIOWA	1294	
		RH-3 SEA KING	1295	
		RH-53 (SIKORSKY)	1296	

5.1-1029

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		SH-2 SEA SPRITE	1297	
		SH-3 SEA KING	1298	
		SH-60 SEA HAWK	1299	
		UH-1 IROQUOIS	1300	
		UH-2 SEA SPRITE	1301	
		UH-12 (HILLER)	1302	
		UH-46 (BOEING)	1303	
		UH-60 BLACK HAWK	1304	
		CH-2U	1305	
		HH-43	1306	
		A109 (AGUSTA)	1307	
		A129 MONGOOSE	1308	
		BO-105 (MBB)	1309	
		DISUSED	1310	
		CH-124 SEA KING	1311	
		DISUSED	1312	THROUGH 1314
		SA 315 LAMA	1315	
		DISUSED	1316	
		DISUSED	1317	
		SA 321 SUPER FRELON	1318	
		SA 330 PUMA	1319	
		SA 332 SUPER PUMA	1320	
		S 342 GAZELLE	1321	
		SA 350 ASTAR	1322	
		SA 360 DAUPHIN	1323	
		SA 361 DAUPHIN	1324	
		WG-13 LYNX	1325	
		WG-34 (WESTLAND)	1326	
		KA-18 HOG	1327	
		KA-20 HARP	1328	
		KA-25 HORMONE	1329	
		KA-26 HOODLUM	1330	
		MI-1 HARE	1331	
		MI-2 HOPLITE	1332	
		MI-4 HOUND	1333	
		MI-6 HOOK	1334	
		MI-8 HIP	1335	
		MI-10 HARKE	1336	
		MI-12 HOMER	1337	
		MI-14 HAZE	1338	
		MI-24 HIND	1339	
		MI-26 HALO	1340	
		CH-53E SUPER STALLION	1341	

FIELD CODING FOR J6.0E0

(SHEET 20)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		MH-53E SEA DRAGON	1342	
		HH-60 NIGHT HAWK	1343	
		HH-65A DOLPHIN	1344	
		KA-27 HELIX-A (ASW)	1345	
		KA-32 HELIX	1346	
		MI-17 HIP-H	1347	
		MI-28 HAVOC	1348	
		ECUREUIL/FENNEL/ESQILO	1349	
		KA-29 HELIX-B	1350	
		KA-50 HOKUM	1351	
		204 BELL	1352	
		205 BELL	1353	
		206 BELL	1354	
		214 BELL	1355	
		280 ENSTROM	1356	
		300 SCHWEIZER	1357	
		406 COMBAT SCOUT	1358	
		A 109 HIRUNDO	1359	
		A 129 MANGUSTA	1360	
		AH 6 CAYUSE	1361	
		ALOUETTE 2	1362	
		ALOUETTE 3	1363	
		AS 350 ECUREUIL	1364	
		AS 532 COUGAR	1365	
		AS 550 FENNEC	1366	
		AS 555 FENNEC	1367	
		AS 565 PANTHER	1368	
		CH 34 WESTLAND	1369	
		EH 101	1370	
		HAS 1 WASP	1371	
		KA-28 HELIX A	1372	
		MD 500 DEFENDER	1373	
		MI 22	1374	
		MI 25	1375	
		MI 35	1376	
		MI 9	1377	
		SA 341 GAZELLE	1378	
		SA 342 GAZELLE	1379	
		SA 365 DAUPHIN 2	1380	
		TS11 ISKRA	1381	
		WESSEX	1382	
		Z9 (HARBIN)	1383	
		CH-146 GRIFFON	1384	

5.1-1031

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		SEA KING AEW (SKW)	1385	
		EH 101 MERLIN	1386	
		AB-212 AUGUSTA BELL	1387	
		BO-105 BOLKOW	1388	
		CH-47 CHINOOK	1389	
		HUGHES 500	1390	
		HUGHES 3000	1391	
		SH-3D SIKORSKY	1392	
		SH-70L SIKORSKY	1393	
		CH-113 LABRADOR	1394	
		NH 90 (C2)	1395	
		NH 90 (RECCE)	1396	
		NH 90 (EW/SEAD)	1397	
		NH 90 (TRANSPORT)	1398	
		SEA LYNX MK88A	1399	
		SEA KING MK41 (KWS)	1400	
		TIGER (HAP)	1401	
		NH 90 (NAVY)	1402	
		TIGER (HAC)	1403	
		SA 341 GAZELLE CANON	1404	
		AS 532 COUGAR HORIZON	1405	
		AW-520 SAR CORMORANT	1406	
		UNDEFINED	1407 THROUGH 1534	
		HELICOPTER GENERAL	1535	

		AIR-AIR MISSILES		

		AIM-4A FALCON	1536	
		AIM-7 SPARROW	1537	
		AIM-9 SIDEWINDER	1538	
		AIM-54 PHOENIX	1539	
		AIM-2A GENIE	1540	
		AIM-120 AMRAAM	1541	
		ASLAM	1542	
		R.530	1543	
		R.550 MAGIC	1544	
		S.530 SUPER 530	1545	
		ASPIDER	1546	
		DISUSED	1547	
		SHAFRIR	1548	
		SKY FLASH	1549	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		DISUSED	1550	
		AA-2 ATOLL	1551	
		AA-3 ANAB	1552	
		AA-5 ASH	1553	
		AA-6 ACRID	1554	
		AA-7 APEX	1555	
		AA-8 APHID	1556	
		AAM	1557	
		AA-9 AMOS	1558	
		AA-XP-1/2	1559	
		AQM-34	1560	
		AQM-91	1561	
		BGM-34 FIREBEE/MQM34	1562	
		YQM-94	1563	
		YQM-98	1564	
		AIM-132 ASRAAM	1565	
		MICA	1566	
		PL-2A	1567	
		PL-5B	1568	
		PL-7	1569	
		PL-9	1570	
		PYTHON 3	1571	
		PYTHON 4	1572	
		AA-10 ALAMO	1573	
		AA-11 ARCHER	1574	
		AA-12 ADDER	1575	
		AA-1 ALKALI	1576	
		AAM-1	1577	
		UNDEFINED	1578 THROUGH 1790	
		AIR-TO-AIR MISSILE	1791	
		GENERAL		

		AIR-GROUND/GROUND-		
		GROUND MISSILES		

		AGM-45 SHRIKE	1792	
		AGM-65 MAVERICK	1793	
		AGM-69 SRAM	1794	
		AGM-78 STANDARD ARM	1795	
		AGM-84 HARPOON	1796	
		AGM-86 ALCM	1797	

FIELD CODING FOR J6.0E0

(SHEET 23)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		AGM-88 HARM	1798	
		AGM-109 TOMAHAWK	1799	
		AM 39 EXOCET	1800	
		AGM-119 PENGUIN	1801	
		AS 11 KILTER	1802	
		AS 12 KEGLER	1803	
		AS 15 KENT	1804	
		AS 30	1805	
		DISUSED	1806	
		RB 05	1807	
		RB 08	1808	
		ADVANCED ASM	1809	
		AS-1 KENNEL	1810	
		AS-2 KIPPER	1811	
		AS-3 KANGAROO	1812	
		AS-4 KITCHEN	1813	
		AS-5 KELT	1814	
		AS-6 KINGFISH	1815	
		AS-7 KERRY	1816	
		DISUSED	1817	
		AS-10 KAREN	1818	
		AS-9 KYLE	1819	
		AS 34 KORMORAN	1820	
		ASM GABRIEL	1821	
		ASM SEA SKUA	1822	
		ASM SEA EAGLE	1823	
		ASMP	1824	
		AT-2 SWATTER	1825	
		AT-3 SAGGER	1826	
		AT-6 SPIRAL	1827	
		C-601	1828	
		C-611	1829	
		C-801	1830	
		C-802	1831	
		CSS-2	1832	
		CSS-3	1833	
		CSS-N-3	1834	
		CSS-X-4	1835	
		FL-2 SILKWORM	1836	
		FL-7	1837	
		HY-2	1838	
		HY-3	1839	
		M-9/11	1840	

5.1-1034

MIL-STD-6016B

FIELD CODING FOR J6.0E0

(SHEET 24)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		WS-1	1841	
		AS-13 KINGBOLT	1842	
		AS-14 KEDGE	1843	
		AS-16 KICKBACK	1844	
		AS-17 KRYPTON	1845	
		AS-18 KAZOO	1846	
		AT-4 SPIGOT	1847	
		AT-5 SPANDREL	1848	
		AT-7 SAXHORN	1849	
		AT-10 STABBER	1850	
		AT-11 SNIPER	1851	
		AT-12	1852	
		AT-13	1853	
		AT-14	1854	
		FROG-7	1855	
		SS-1 SCUD	1856	
		SS-11 SEGO	1857	
		SS-13 SAVAGE	1858	
		SS-18 SATAN	1859	
		SS-19 STILETTO	1860	
		SS-24 SCALPEL	1861	
		SS-25 SICKLE	1862	
		SS-N-2 STYX	1863	
		SS-N-3 SHADDOCK	1864	
		SS-N-6 SERB	1865	
		SS-N-7 STARBRIGHT	1866	
		SS-N-8 SAWFLY	1867	
		SS-N-9 SIREN	1868	
		SS-N-12 SANDBOX	1869	
		SS-N-18 STINGRAY	1870	
		SS-N-19 SHIPWRECK	1871	
		SS-N-20 STURGEON	1872	
		SS-N-21 SAMPSON	1873	
		SS-N-22 SUNBURN	1874	
		SS-N-23 SKIFF	1875	
		SS-N-26	1876	
		AGNI	1877	
		PRITHVI	1878	
		TOW	1879	
		AGM-114 HELLFIRE	1880	
		MLRS	1881	
		HOT	1882	
		MILAN	1883	

5.1-1035

MIL-STD-6016B

FIELD CODING FOR J6.0E0

(SHEET 25)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		TRIGAT	1884	
		OTOMAT	1885	
		RBS-15M	1886	
		ARMAT	1887	
		ALARM	1888	
		AGM-12 BULLPUP	1889	
		AGM-62A WALLEYE	1890	
		AGM-123A SKIPPER II	1891	
		APACHE (ASM)	1892	
		AS 8	1893	
		AT-1 SWATTER	1894	
		CAS1	1895	
		KH-41 MOSKIT	1896	
		MARTIN PESCADOR	1897	
		MAS1 CARCARA	1898	
		RB 04E	1899	
		STAR	1900	
		SEA INDIGO	1901	
		MM 38	1902	
		MM 40	1903	
		SM 39	1904	
		AS 34 KORMORAN II	1905	
		UNDEFINED	1906 THROUGH 2046	
		AIR-GROUND MISSILE	2047	
		GENERAL		

		SURFACE TO AIR MISSILES		

		FIM-92 STINGER	2048	
		NIM-23 HAWK	2049	
		MIM-42 REDEYE	2050	
		MIM-72 CHAPARRAL	2051	
		MIM-104 PATRIOT	2052	
		RIM-2 TERRIER	2053	
		RIM-7 SEA SPARROW	2054	
		RIM-8 TALOS	2055	
		RIM-24 TARTAR	2056	
		RIM-66 STANDARD MISSILE	2057	
		RIM-67 STANDARD MISSILE	2058	
		BLOWPIPE	2059	
		DISUSED	2060 THROUGH 2061	

5.1-1036

MIL-STD-6016B

FIELD CODING FOR J6.0E0

(SHEET 26)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		SEA DART	2062	
		DISUSED	2063	
		SEA WOLF	2064	
		S 440 CROTALE EDIR	2065	
		RAPIER	2066	
		RBS-70 (SLM)	2067	
		DISUSED	2068	
		SAM ROLAND	2069	
		SA-2 GUIDELINE	2070	
		SA-3 GOA	2071	
		SA-4 GANEF	2072	
		SA-N-3 GOBLET	2073	
		SA-5 GAMMON	2074	
		SA-N-4 GECKO	2075	
		SA-6 GAINFUL	2076	
		SA-N-6 GRUMBLE	2077	
		SA-7 GRAIL	2078	
		SA-8 GECKO	2079	
		SA-9 GASKIN	2080	
		SA-10 GRUMBLE	2081	
		SA-11 GADFLY	2082	
		SA-12	2083	
		SA-13 GOPHER	2084	
		MISTRAL	2085	
		SA-N-7 GADFLY	2086	
		SA-N-8 GREMLIN	2087	
		SA-14 GREMLIN	2088	
		SA-16 GIMLET	2089	
		SA-X-17	2090	
		SA-N-5 GRAIL	2091	
		SA-N-11 GRISOM	2092	
		SA-12A GLADIATOR	2093	
		SA-12B GIANT	2094	
		SA-14 GREMLIN	2095	
		SA-15 GAUNTLET	2096	
		SA-17 GRIZZLY	2097	
		SA-N-12 GRIZZLY	2098	
		SA-18 GROUSE	2099	
		SA-19 GRISOM	2100	
		RIM-116 RAM	2101	
		ADATS	2102	
		JAVELIN	2103	
		STARBURST	2104	

5.1-1037

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		STARSTREAK	2105	
		ASPIDE	2106	
		I-HAWK	2107	
		ROLAND II	2108	
		SM-2 BLOCK II	2109	
		SM-2 BLOCK III	2110	
		SM-2 BLOCK IIIA	2111	
		SM-2 BLOCK IIIB	2112	
		SM-2 BLOCK IV	2113	
		SM-2 BLOCK IVA	2114	
		SM-3 LEAP	2115	
		AKASH	2116	
		ANZA	2117	
		ANZA II	2118	
		CSA-1	2119	
		CSA-2	2120	
		CSA-4	2121	
		CSA-5	2122	
		FM-80	2123	
		HN-5	2124	
		NK-7	2125	
		NK-16	2126	
		PANTZYR	2127	
		RAPIER 2000/JERNAS	2128	
		RBS-90	2129	
		SAKR	2130	
		SAVA	2131	
		SHANINE	2132	
		SKYGUARD ASPIDE	2133	
		SPADA	2134	
		TAM SAM	2135	
		TIGERCAT	2136	
		VANGUARD	2137	
		SA-N-1 GOA	2138	
		SA-N-9 GAUNTLET	2139	
		SA-N-10	2140	
		ALBATROS/ASPIDE	2141	
		SM-1	2142	
		VT1 CROTALE	2143	
		MASURCA	2144	
		ASTER 15	2145	
		ASTER 30	2146	
		UNDEFINED	2147 THROUGH 4093	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE -----	(CONTINUED)	
		RESET TO NO STATEMENT	4094	
		SURFACE-TO-AIR MISSILE GENERAL	4095	
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----		THE SPECIFIC TYPE OF POINT OR TRACK WITH AN ENVIRONMENT/CATEGORY OF SURFACE (MARITIME).
		NO STATEMENT	0	
		CV GENERAL	1	
		CLEMENCEAU	2	
		ENTERPRISE	3	
		FORRESTAL	4	
		JOHN F KENNEDY	5	
		KITTY HAWK	6	
		MIDWAY	7	
		NIMITZ	8	
		CHARLES DE GAULLE	9	
		UNDEFINED	10 THROUGH 21	
		CVS GENERAL	22	
		DEDALO	23	
		MINAS GERAIS	24	
		VIKRANT	25	
		VEINTICINCO DE MAYO	26	
		VIRAAT	27	
		UNDEFINED	28 THROUGH 35	
		CVH GENERAL	36	
		GIUSEPPE GARIBALDI	37	
		INVINCIBLE	38	
		JEANNE D'ARC	39	
		KIEV	40	
		PRINCIPE DE ASTURIAS	41	
		UNDEFINED	42	
		KIEV (MODIFIED)	43	
		UNDEFINED	44 THROUGH 52	
		BB GENERAL	53	
		IOWA	54	
		UNDEFINED	55 THROUGH 64	
		CC GENERAL	65	
		SVERDLOV (MODIFIED)	66	
		UNDEFINED	67 THROUGH 76	
		CG GENERAL	77	
		ANDREA DORIA	78	
		BAINBRIDGE	79	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		BELKNAP	80	
		CALIFORNIA	81	
		UNDEFINED	82	
		KARA	83	
		KIROV	84	
		KRESTA I	85	
		KRESTA II	86	
		KYNDA	87	
		LEAHY	88	
		LONG BEACH	89	
		SLAVA	90	
		TICONDEROGA	91	
		TRUXTUN	92	
		VIRGINIA	93	
		VITTORIO VENETO	94	
		UNDEFINED	95 THROUGH 118	
		CH GENERAL	119	
		MOSKVA	120	
		UNDEFINED	121 THROUGH 130	
		CA GENERAL	131	
		UNDEFINED	132	
		SVERDLOV	133	
		UNDEFINED	134 THROUGH 143	
		DD GENERAL	144	
		AKIZUKI	145	
		ALLEN M SUMNER	146	
		ALLEN M SUMNER FRAM II	147	
		ALMIRANTE	148	
		AMATSUKAZE	149	
		ANIMOSO	150	
		ANSHAN	151	
		ARLEIGH BURKE	152	
		ASAGARI	153	
		UNDEFINED	154	
		AUDACE	155	
		AYANAMI	156	
		DISUSED	157	
		CARPENTER FRAM I	158	
		CHARLES F ADAMS (MOD)	159	
		CHARLES F ADAMS	160	
		COONTZ	161	
		DISUSED	162 THROUGH 163	

FIELD CODING FOR J6.0E0

(SHEET 30)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		UNDEFINED	164	
		FLETCHER	165	
		FORREST SHERMAN (MOD) & HULL	166	
		FRIESLAND	167	
		GEARING FRAM I	168	
		GEARING FRAM II	169	
		UNDEFINED	170	
		DISUSED	171	
		HARUNA	172	
		HATAKAZE	173	
		HATSUYUKI	174	
		IMPAVIDO	175	
		KANIN	176	
		KASHIN (MODIFIED)	177	
		KASHIN	178	
		KASHIN II	179	
		KIDD	180	
		UNDEFINED	181	
		KILDIN (MODIFIED)	182	
		KOTLIN	183	
		KOTLIN (MODIFIED)	184	
		LUDA (TYPE 051)	185	
		MEKO 360	186	
		MINEGUMO	187	
		PROJECT 15	188	
		ROBERT H SMITH	189	
		ROGER D LAURIA	190	
		SAM KOTLIN	191	
		SHIRANE	192	
		SKORY	193	
		SOVREMENYY	194	
		SPRUANCE	195	
		SUFFREN	196	
		TACHIKAZE	197	
		TAKATSUKI	198	
		TYPE 42	199	
		DISUSED	200	
		DISUSED	201	
		TYPE F-70 (AAW)	202	
		TYPE F-70 (ASW)	203	
		TYPE F-67	204	

5.1-1041

MIL-STD-6016B

FIELD CODING FOR J6.0E0

(SHEET 31)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		UNDEFINED	205 THROUGH 206	
		TYPE T-53 (MODIFIED-ASW)	207	
		UNDEFINED	208	
		UDALOY	209	
		YAMAGUMO	210	
		Z	211	
		IROQUOIS	212	
		UNDEFINED	213 THROUGH 276	
		DE GENERAL	277	
		UNDEFINED	278	
		CASTLE	279	
		UNDEFINED	280 THROUGH 295	
		FF GENERAL	296	
		ALMIRANTE CLEMENTE	297	
		ALMIRANTE PEREIRA DA SILVA	298	
		ALPINO	299	
		DISUSED	300 THROUGH 301	
		BALEARES	302	
		BAPTISTA DE ANDRADE	303	
		UNDEFINED	304	
		BERK	305	
		BLACK SWAN	306	
		BROADSWORD (TYPE 22)	307	
		BRONSTEIN	308	
		BROOKE	309	
		CANNON	310	
		CHARLES LAWRENCE	311	
		CHENGDU	312	
		CHIKUGO	313	
		COMANDANTE JOAO BELO	314	
		UNDEFINED	315	
		CROSLEY	316	
		DEALEY	317	
		DESCUBIERTA	318	
		DUKE (TYPE 23)	319	
		DURANGO	320	
		EDSALL	321	
		GARCIA	322	
		GLOVER	323	
		GODAVARI	324	
		GRISHA I	325	

5.1-1042

MIL-STD-6016B

FIELD CODING FOR J6.0E0

(SHEET 32)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		GRISHA II	326	
		GRISHA III	327	
		UNDEFINED	328	
		GRISHA V	329	
		UNDEFINED	330	
		HVIDBJORNEN	331	
		ISHKARI	332	
		ISUZU	333	
		JACOB VAN HEEMSKERCK	334	
		JIANGDONG (TYPE 053J)	335	
		JIANGHU (TYPE 053H)	336	
		JIANGNAN	337	
		JOAO COUTINHO	338	
		KAREL DOORMAN	339	
		KNOX	340	
		DISUSED	341	
		KONI	342	
		KORTENAER	343	
		KRIVAK I	344	
		KRIVAK II	345	
		KRIVAK III	346	
		LA FAYETTE	347	
		DISUSED	348	
		LEOPARD	349	
		LUP0	350	
		M	351	
		DISUSED	352	
		MAESTRALE	353	
		MEKO 140 TYPE	354	
		MEKO 200 TYPE	355	
		MIRKA I	356	
		MIRKA II	357	
		NIELS JUEL	358	
		NITEROI	359	
		OLIVER HAZARD PERRY	360	
		OSLO	361	
		PEDER SKRAM	362	
		PETYA I (MODIFIED)	363	
		PETYA I	364	
		PETYA II (MODIFIED)	365	
		PETYA II	366	
		PETYA III	367	

5.1-1043

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		UNDEFINED	368	
		DISUSED	369	
		RIGA	370	
		RIVER	371	
		BRANDENBURG (TYPE 123)	372	
		RUDDEROW	373	
		SACHSEN (TYPE 124)	374	
		SAVAGE	375	
		DISUSED	376	
		TROMP	377	
		TYPE A 69	378	
		TYPE F-2000S	379	
		UNDEFINED	380 THROUGH 381	
		YUBARI	382	
		BREMEN (TYPE 122)	383	
		CLAUDE JONES	384	
		FFG 7	385	
		HALIFAX	386	
		NAJIN	387	
		PRESIDENT	388	
		SANTA MARIA	389	
		VOSPER MK 5	390	
		VOSPERTHORNYCROFT MK 7	391	
		WIELINGEN	392	
		FLOREAL	393	
		COMMANDANT BORY	394	
		UNDEFINED	395 THROUGH 478	
		FS GENERAL	479	
		ALBATROS	480	
		AUK CLASS	481	
		DE CRISTOFARO	482	
		DISUSED	483	
		MINERVA	484	
		NANUCHKA I	485	
		NANUCHKA II	486	
		NANUCHKA III	487	
		DISUSED	488	
		PF-103	489	
		SAAR 5	490	
		SLEIPNER	491	
		TARANTUL I	492	
		TARANTUL II	493	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		DISUSED	494	
		WADI	495	
		UNDEFINED	496 THROUGH 517	
		LL GENERAL	518	
		UNDEFINED	519 THROUGH 528	
		LCC GENERAL	529	
		BLUE RIDGE	530	
		CAVEZZALE	531	
		UNDEFINED	532 THROUGH 540	
		LKA GENERAL	541	
		CHARLESTON	542	
		UNDEFINED	543 THROUGH 552	
		LFS GENERAL	553	
		UNDEFINED	554 THROUGH 563	
		LHA GENERAL	564	
		TARAWA	565	
		UNDEFINED	566 THROUGH 575	
		LHD GENERAL	576	
		WASP	577	
		UNDEFINED	578 THROUGH 587	
		LPA GENERAL	588	
		UNDEFINED	589 THROUGH 598	
		LPD GENERAL	599	
		AUSTIN	600	
		FEARLESS	601	
		IVAN ROGOV	602	
		UNDEFINED	603	
		RALEIGH	604	
		SAN GIORGIO	605	
		UNDEFINED	606 THROUGH 615	
		LPH GENERAL	616	
		IWO JIMA	617	
		UNDEFINED	618 THROUGH 627	
		LSD GENERAL	628	
		ANCHORAGE	629	
		ASHLAND	630	
		CABILDO	631	
		OURAGAN	632	
		FOUDRE	633	
		THOMASTON	634	
		WHIDBEY ISLAND	635	
		UNDEFINED	636 THROUGH 646	

FIELD CODING FOR J6.0E0

(SHEET 35)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		LSL GENERAL	647	
		SIR GERAINT	648	
		UNDEFINED	649 THROUGH 657	
		LSM GENERAL	658	
		ASHDOD	659	
		BATRAL	660	
		CAKABEY	661	
		EDIC I	662	
		EDIC II	663	
		LSM-1	664	
		MP-4	665	
		POLNOCHNY	666	
		POLOCHNY A	667	
		POLOCHNY B	668	
		POLOCHNY C	669	
		POLOCHNY D	670	
		YUDAO	671	
		YULIMG	672	
		BOUGAINVILLE	673	
		UNDEFINED	674 THROUGH 687	
		LST GENERAL	688	
		ALLIGATOR	689	
		ATSUMI	690	
		UNDEFINED	691	
		BROOKE MARINE 93M	692	
		CAKABEY NL-122	693	
		CNIM PS 700	694	
		DE SOTO COUNTY	695	
		DISUSED	696	
		HENGAM	697	
		LST 1-510	698	
		LST 511-1152	699	
		MIURA	700	
		NEWPORT	701	
		ROPUCHA	702	
		SARUCABEY	703	
		CNGF	704	
		OCEAN	705	
		ALBION	706	
		TERREBONNE PARISH	707	
		TOBRUK	708	
		UNDEFINED	709	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		YUKAN	710	
		UNDEFINED	711 THROUGH 730	
		LSV GENERAL	731	
		UNDEFINED	732 THROUGH 741	
		LC GENERAL	742	
		UNDEFINED	743 THROUGH 751	
		LCM GENERAL	752	
		CTM 1	753	
		HUNGNAM	754	
		LCM 1057/1058	755	
		LCM 6	756	
		LCM 8	757	
		T-4	758	
		TSAPLYA	759	
		LCM (TYPE 521)	760	
		UNDEFINED	761 THROUGH 772	
		LCP GENERAL	773	
		DISUSED	774	
		LCM 1031	775	
		LCM 1035/1036	776	
		LCM 1055/1056	777	
		NAMPO	778	
		UNDEFINED	779 THROUGH 788	
		LCPL GENERAL	789	
		UNDEFINED	790 THROUGH 799	
		LWC GENERAL	800	
		UNDEFINED	801 THROUGH 810	
		LCU GENERAL	811	
		BALIKPAPAN	812	
		BOMBARDA	813	
		BRAILA	814	
		LCU (TYPE 520)	815	
		DISUSED	816	
		DISUSED	817	
		DISUSED	818	
		DSM-501	819	
		HANCHON	820	
		HANTAE	821	
		KISHON	822	
		KVALSUND	823	
		LCT MK 5	824	
		LCT MK 6	825	

FIELD CODING FOR J6.0E0

(SHEET 37)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		LCU 501	826	
		MFP D-3	827	
		MZ	828	
		REINOYSUND	829	
		SMB-1	830	
		TU 57-M	831	
		US LCU 1466	832	
		VYDRA	833	
		YURA	834	
		UNDEFINED	835 THROUGH 866	
		LCVP GENERAL	867	
		UNDEFINED	868 THROUGH 877	
		LCAC GENERAL	878	
		AIST	879	
		GUS	880	
		LEBED	881	
		UTENOK	882	
		WELLINGTON BH-7 MK 4	883	
		WELLINGTON BH-7 MK 5	884	
		WINCHESTER (SR.N6)	885	
		UNDEFINED	886 THROUGH 896	
		MM GENERAL	897	
		ALESHA	898	
		ALVSBORG	899	
		BORGEN	900	
		CARLSKRONA	901	
		COSAR	902	
		FALSTER	903	
		FURUSUND (MUL-20)	904	
		LANGELAND	905	
		LINDORMEN	906	
		LSM-1 (MODIFIED)	907	
		MUL-11	908	
		MUL-12	909	
		DISUSED	910	
		SMITH	911	
		US YMP	912	
		VIDAR	913	
		UNDEFINED	914 THROUGH 935	
		MCS GENERAL	936	
		UNDEFINED	937 THROUGH 946	
		MCJ GENERAL	947	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		UNDEFINED	948 THROUGH 957	
		MCD GENERAL	958	
		KINGSTON	959	
		MUEHLHAUSEN MCD (TYPE 742A)	960	
		UNDEFINED	961 THROUGH 968	
		MCM GENERAL	969	
		UNDEFINED	970 THROUGH 979	
		MH GENERAL	980	
		UNDEFINED	981 THROUGH 990	
		MHO GENERAL	991	
		UNDEFINED	992 THROUGH 1001	
		MHC GENERAL	1002	
		ADJUTANT (MODIFIED)	1003	
		AGGRESSIVE	1004	
		CIRCE	1005	
		WEIDEN MHC (TYPE 332)	1006	
		KOBLENZ MHC (TYPE 331B)	1007	
		HAM	1008	
		HUNT	1009	
		LANDSORT	1010	
		LERICI	1011	
		MSC 50	1012	
		MSO 218	1013	
		MSO 503	1014	
		SAUDA	1015	
		SIRIUS	1016	
		DISUSED	1017	
		TRIPARTITE	1018	
		VANYA I	1019	
		SANDOWN (SRMH)	1020	
		UNDEFINED	1021 THROUGH 1029	
		MHSC GENERAL	1030	
		MARS	1031	
		UNDEFINED	1032 THROUGH 1043	
		MHI GENERAL	1044	
		BAY	1045	
		UNDEFINED	1046 THROUGH 1054	
		MHA GENERAL	1055	
		UNDEFINED	1056 THROUGH 1065	
		ML GENERAL	1066	
		UNDEFINED	1067 THROUGH 1076	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		MLC GENERAL	1077	
		CURLEW	1078	
		UNDEFINED	1079 THROUGH 1088	
		MLI GENERAL	1089	
		UNDEFINED	1090 THROUGH 1099	
		MLO GENERAL	1100	
		UNDEFINED	1101 THROUGH 1110	
		MLR GENERAL	1111	
		UNDEFINED	1112 THROUGH 1121	
		MLA GENERAL	1122	
		UNDEFINED	1123 THROUGH 1132	
		MLS GENERAL	1133	
		UNDEFINED	1134 THROUGH 1143	
		MS GENERAL	1144	
		UNDEFINED	1145 THROUGH 1154	
		MSF GENERAL	1155	
		EX-ERIMO	1156	
		K-8	1157	
		KROGULEC	1158	
		M-40	1159	
		MSO-421	1160	
		NATYA I	1161	
		NATYA II	1162	
		RIVER	1163	
		T-43	1164	
		YURKA	1165	
		UNDEFINED	1166 THROUGH 1180	
		MSO GENERAL	1181	
		ACME	1182	
		AGGRESSIVE	1183	
		UNDEFINED	1184 THROUGH 1193	
		MSC GENERAL	1194	
		136 FT	1195	
		ADJUTANT	1196	
		ARKOE	1197	
		BAY	1198	
		DOKKUM	1199	
		HATSUSHIMA	1200	
		HAYASE	1201	
		DISUSED	1202	
		KOUZJ	1203	
		LENIWKA	1204	

FIELD CODING FOR J6.0E0

(SHEET 40)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		HAMELN MSC (TYPE 343)	1205	
		MSC 268	1206	
		MSC 292	1207	
		MSC 294	1208	
		NOTEC	1209	
		SASHA	1210	
		SAUDA	1211	
		DISUSED	1212	
		DISUSED	1213	
		SONYA	1214	
		T-301	1215	
		T-43	1216	
		TAKAMI	1217	
		DISUSED	1218	
		VANYA	1219	
		VANYA I	1220	
		VANYA II	1221	
		WUSONG	1222	
		ZHENYA	1223	
		UNDEFINED	1224 THROUGH 1263	
		MSI GENERAL	1264	
		DISUSED	1265	
		AUX MINESWEEPER NO 1	1266	
		CAPE	1267	
		FRAUENLOB (TYPE 394)	1268	
		HAM	1269	
		HERSTAL	1270	
		KIISKI	1271	
		KUHA	1272	
		M-111	1273	
		M-15	1274	
		M-31	1275	
		M-43/47	1276	
		PIPA-A	1277	
		WOCHANG	1278	
		YEVGENYA	1279	
		YUKTO	1280	
		UNDEFINED	1281 THROUGH 1302	
		MSR GENERAL	1303	
		UNDEFINED	1304 THROUGH 1313	
		MSB GENERAL	1314	
		K-8	1315	

5.1-1051

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		N-300	1316	
		NESTIN	1317	
		N0. 7	1318	
		OLYA	1319	
		PO-2	1320	
		TR-40	1321	
		VD-141	1322	
		VULCAIN	1323	
		STYX	1324	
		PLUTON	1325	
		ACHERON	1326	
		UNDEFINED	1327 THROUGH 1334	
		MSA GENERAL	1335	
		UNDEFINED	1336 THROUGH 1345	
		MSD GENERAL	1346	
		HFG-1 (TROIKA)	1347	
		ILYUSHA	1348	
		UNDEFINED	1349 THROUGH 1358	
		MCSD GENERAL	1359	
		UNDEFINED	1360 THROUGH 1369	
		MSS GENERAL	1370	
		ANDRYUSHA	1371	
		BALTIKA	1372	
		POLNOCNY	1373	
		UNDEFINED	1374 THROUGH 1383	
		MSH GENERAL	1384	
		UNDEFINED	1385 THROUGH 1394	
		MSO GENERAL	1395	
		BERLAIMONT (MODIFIED)	1396	
		UNDEFINED	1397 THROUGH 1405	
		MSHC GENERAL	1406	
		HUNT	1407	
		TRIPARTITE	1408	
		WILTON	1409	
		UNDEFINED	1410 THROUGH 1419	
		PP GENERAL	1420	
		AB 25	1421	
		UNDEFINED	1422	
		BALDER	1423	
		CASTLE	1424	
		ISLAND	1425	
		KRONSHTADT	1426	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		PC-1638	1427	
		UNDEFINED	1428	THROUGH 1438
		PG GENERAL	1439	
		BESKYTTEVREN	1440	
		BIHORO	1441	
		ERIMO	1442	
		DISUSED	1443	
		HVIDBJOERNEN	1444	
		IZU	1445	
		KOJIMA	1446	
		UNDEFINED	1447	
		NOJIMA	1448	
		PAUK	1449	
		PEACOCK	1450	
		POTI	1451	
		SAVAGE	1452	
		SHIRETOKO	1453	
		SOYA	1454	
		TACOMA	1455	
		LEOPARD (TYPE 148)	1456	
		BAMBU	1457	
		CASSIOPEA	1458	
		UNDEFINED	1459	THROUGH 1480
		PGS GENERAL	1481	
		UNDEFINED	1482	THROUGH 1491
		PGB GENERAL	1492	
		UNDEFINED	1493	THROUGH 1502
		PGF GENERAL	1503	
		ALBATROS (TYPE 143)	1504	
		ASHEVILLE	1505	
		BARNEGAT	1506	
		CHONGJU	1507	
		GEPARD (TYPE 143A)	1508	
		HOUKU	1509	
		IVANSUSANIN	1510	
		KAMAN	1511	
		KARTAL	1512	
		KOMAR	1513	
		LA COMBATTANTE II	1514	
		LA COMBATTANTE III	1515	
		LURSSSEN FPB 57 TYPE	1516	
		OKHTENSKIY	1517	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		OSA I	1518	
		OSA II	1519	
		P-4	1520	
		PURGA	1521	
		SAAR 2	1522	
		SAAR 3	1523	
		SAAR 4	1524	
		SAAR 5	1525	
		SARIWON	1526	
		SNOEGG	1527	
		SOHUNG	1528	
		SOJU	1529	
		SORUM	1530	
		STORM	1531	
		T	1532	
		T-43	1533	
		T-58	1534	
		VOSPER 100-FT	1535	
		VOSPER BRAVE	1536	
		WILLEMOES	1537	
		UNDEFINED	1538 THROUGH 1583	
		PC GENERAL	1584	
		ADMIRABLE	1585	
		AGDLEK	1586	
		AKIZUKI	1587	
		ATTACK	1588	
		BAY	1589	
		DISUSED	1590	
		BROOKE MARINE 108-FT	1591	
		CACINE	1592	
		CHONGJU	1593	
		DAPHNE	1594	
		GDANSK	1595	
		HAIKOU	1596	
		HAINAN	1597	
		HANOE	1598	
		K-48	1599	
		KRALJEVICA	1600	
		KRONSHADT	1601	
		LAKE	1602	
		MAGAEN	1603	
		MATSUNAMI	1604	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		MIZUTORI	1605	
		MURAKUMO	1606	
		OBLUZE	1607	
		PGM 71	1608	
		SDB MK II	1609	
		SDB MK III	1610	
		SEAFORTH	1611	
		SHANGHAI	1612	
		SHANGHAI II	1613	
		SHANGHAI II (MODIFIED)	1614	
		SHIKINAMI	1615	
		SO-1	1616	
		SOMAN	1617	
		STENKA	1618	
		T-58	1619	
		TAECHONG	1620	
		UK FORD	1621	
		UMIGIRI	1622	
		US 110-FT	1623	
		US 173-FT	1624	
		UNDEFINED	1625	
		ARCHER	1626	
		ATTACKER	1627	
		23M PC (MANLY)	1628	
		UNDEFINED	1629	THROUGH 1681
		PCF GENERAL	1682	
		BABOCHKA	1683	
		MURAVEY	1684	
		POTI	1685	
		SO-1 (MODIFIED)	1686	
		UNDEFINED	1687	THROUGH 1696
		PCE GENERAL	1697	
		UNDEFINED	1698	THROUGH 1707
		PB GENERAL	1708	
		AKAGI	1709	
		AKIZUKI	1710	
		ALBATROZ	1711	
		ATTACK P-90	1712	
		BARSO	1713	
		BAY	1714	
		BIZAN	1715	
		BROOKE MARINE 37.5M	1716	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		CHONGJIN	1717	
		DABUR	1718	
		DALARO	1719	
		DE L'ESTEREL	1720	
		DILOS	1721	
		DOM ALEIXO	1722	
		DISUSED	1723	
		FREMANTLE	1724	
		GOULANDRIS	1725	
		GUANABACOA	1726	
		HAMAGIRI	1727	
		HAMELIN 37M	1728	
		HIDAKA	1729	
		HUANGPU	1730	
		INTERCEPTOR MK II	1731	
		KIMJIN 67-FT	1732	
		MATSUNAMI	1733	
		MURAKUMO	1734	
		OIRASE	1735	
		P 400	1736	
		P-6	1737	
		PANAGOPOULOS	1738	
		PATRA	1739	
		PBR MK II	1740	
		PBR MK III	1741	
		PGM 71	1742	
		PO-2	1743	
		POLISH K-8	1744	
		POLUCHAT I	1745	
		SHANTOU	1746	
		SHIKINAMI	1747	
		SINHUNG 72-FT	1748	
		SKANOER	1749	
		SOYA/TSUGARU	1750	
		SPEAR	1751	
		STEWART 85-FT	1752	
		SWATOW	1753	
		SWIFT	1754	
		TAISHAN	1755	
		TESHIO	1756	
		TRACKER II	1757	
		US 110-FT	1758	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		US ARMY 2001 65-FT	1759	
		USCG 83-FT	1760	
		VEDETTE 28 92-FT	1761	
		VIKRAM	1762	
		VOSPER 70-FT	1763	
		YAMAYURI	1764	
		ZHUK	1765	
		SNOEGG	1766	
		MARS	1767	
		TRIDENT	1768	
		UNDEFINED	1769 THROUGH 1842	
		PBF GENERAL	1843	
		CHAO (CHODO)	1844	
		DE L'ESTEREL	1845	
		GIRNE	1846	
		HAUK	1847	
		HUGIN	1848	
		SLEPEN	1849	
		UNDEFINED	1850	
		SPICA II	1851	
		MARS	1852	
		UNDEFINED	1853 THROUGH 1863	
		PBS GENERAL	1864	
		UNDEFINED	1865 THROUGH 1874	
		PBR GENERAL	1875	
		LEIE	1876	
		PIYAVKA	1877	
		SHMEL	1878	
		VOSH	1879	
		YATUSH	1880	
		YAZ	1881	
		UNDEFINED	1882 THROUGH 1891	
		PT GENERAL	1892	
		AN JU	1893	
		EPITROP	1894	
		HIGGINS 78-FT	1895	
		HUCHUAN PTH-	1896	
		HUZHOU	1897	
		IWON	1898	
		DISUSED	1899	
		KU SONG	1900	
		NO. 11	1901	

FIELD CODING FOR J6.0E0

(SHEET 47)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		P-4	1902	
		P-6	1903	
		PILICA	1904	
		SHERSHEN	1905	
		SIN HUNG	1906	
		SIN NAM	1907	
		SINPO	1908	
		SOLOVEN	1909	
		SPICA	1910	
		TJELD	1911	
		WISLA	1912	
		DISUSED	1913	
		SHANGDONG	1914	
		TURYA	1915	
		UNDEFINED	1916 THROUGH 2047	
		PHM GENERAL	2048	
		MATKA	2049	
		PEGASUS	2050	
		SARANCHA	2051	
		SHIMRIT	2052	
		SPARVIERO	2053	
		UNDEFINED	2054 THROUGH 2063	
		BM GENERAL	2064	
		UNDEFINED	2065 THROUGH 2074	
		BMR GENERAL	2075	
		UNDEFINED	2076 THROUGH 2085	
		SWCL GENERAL	2086	
		UNDEFINED	2087 THROUGH 2096	
		AA GENERAL	2097	
		UNDEFINED	2098 THROUGH 2107	
		AG GENERAL	2108	
		ADOLF	2109	
		AKIZUKI	2110	
		ANGARA	2111	
		ARGO	2112	
		AYANAMI	2113	
		DISUSED	2114 THROUGH 2115	
		CHAMOIS	2116	
		CHIHAYA	2117	
		DALDYN	2118	
		DISUSED	2119	
		DINGHAI	2120	

5.1-1058

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		ENDURANCE	2121	
		EXPLORER	2122	
		DISUSED	2123	
		FRIPONNE	2124	
		GALEB	2125	
		UNDEFINED	2126	
		HAM	2127	
		DISUSED	2128	
		HAYABUSA	2129	
		DISUSED	2130	
		ISLES	2131	
		KEYLA	2132	
		KURIHAMA	2133	
		L' ARCHEONAUTE	2134	
		L' ATHOS	2135	
		UNDEFINED	2136	
		LENTRA	2137	
		LIANYUN	2138	
		LSIL	2139	
		MIZUTORI	2140	
		MP-2	2141	
		MP-8	2142	
		MURASAME	2143	
		NEFTEGAZ	2144	
		NØ. 81	2145	
		NORGE	2146	
		OHRE	2147	
		ONEGA	2148	
		DISUSED	2149	
		POSEIDON	2150	
		PS-10	2151	
		RARI	2152	
		RHIN	2153	
		SABAC	2154	
		SHAHSAVAR	2155	
		ST. LYKODIS	2156	
		STALWART	2157	
		T-43	2158	
		TAPATAI	2159	
		TAPPE	2160	
		THULE	2161	
		TOMBA	2162	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		TSUGARU	2163	
		UMITAKA	2164	
		US 184 FT. PCE	2165	
		US 72 FT. HMDL	2166	
		VANGUARD	2167	
		VIS	2168	
		VYTEGRALES	2169	
		WHISKEY	2170	
		WILHELM PULLWER (TYPE 741)	2171	
		PELIKAAN	2172	
		RANCE	2173	
		MERCURE	2174	
		STERNE	2175	
		ALBATROS	2176	
		PHENIX	2177	
		UNDEFINED	2178 THROUGH 2256	
		ARV GENERAL	2257	
		ARGUS	2258	
		ENGADINE	2259	
		RELIANT	2260	
		UNDEFINED	2261 THROUGH 2270	
		AVT GENERAL	2271	
		LEXINGTON	2272	
		UNDEFINED	2273 THROUGH 2282	
		AE GENERAL	2283	
		EVROS	2284	
		DISUSED	2285	
		KILAUEA	2286	
		NITRO	2287	
		REGENT	2288	
		SURIBACHI	2289	
		WESTERWALD (TYPE 760)	2290	
		UNDEFINED	2291 THROUGH 2301	
		AEL GENERAL	2302	
		UNDEFINED	2303 THROUGH 2312	
		AET GENERAL	2313	
		UNDEFINED	2314 THROUGH 2323	
		AETL GENERAL	2324	
		UNDEFINED	2325 THROUGH 2334	
		AGF GENERAL	2335	
		ABDIEL	2336	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		CORONADO	2337	
		GODETIA	2338	
		LA SALLE	2339	
		DISUSED	2340	
		ZINNIA	2341	
		ELBE (TYPE 404)	2342	
		UNDEFINED	2343	THROUGH 2351
		ACM GENERAL	2352	
		UNDEFINED	2353	THROUGH 2362
		APB GENERAL	2363	
		MICHELANGELO	2364	
		UNDEFINED	2365	THROUGH 2374
		ABU GENERAL	2375	
		CARDENAS	2376	
		FINIK I	2377	
		KARPF II	2378	
		SKB 64	2379	
		YANTAI	2380	
		YANNAN	2381	
		YANGUAN	2382	
		TIANEE	2383	
		LA PRUDENTE	2384	
		UNDEFINED	2385	THROUGH 2395
		ABUD GENERAL	2396	
		UNDEFINED	2397	THROUGH 2406
		ANL GENERAL	2407	
		UNDEFINED	2408	THROUGH 2417
		ARC GENERAL	2418	
		EMBA I	2419	
		EMBA II	2420	
		KALAR	2421	
		KLASMA	2422	
		MP-2	2423	
		NEPTUNE	2424	
		TELNOVSK (MODIFIED)	2425	
		YOUDIAN	2426	
		ZEUS	2427	
		UNDEFINED	2428	THROUGH 2440
		AK GENERAL	2441	
		2ND LT JOHN P BOBO	2442	
		ALCHIBA	2443	
		AMGUEMA	2444	

FIELD CODING FOR J6.0E0

(SHEET 51)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		ANDIZHAN	2445	
		ANDONG	2446	
		ANDROMEDA (CONVERTED)	2447	
		DISUSED	2448	
		BARRICADE	2449	
		BITTERBUSH	2450	
		C3-S-33A TYPE	2451	
		(CONVERTED)		
		C4-S-66A TYPE	2452	
		C4-S-69B TYPE	2453	
		C4-S-A3 TYPE	2454	
		C5-S-75A TYPE	2455	
		CHULYM	2456	
		CPL LOUIS J HAUGE JR	2457	
		DINGHAI	2458	
		DONBA SS	2459	
		FS DESIGN 330	2460	
		GALATI	2461	
		HONGQI	2462	
		ISLES	2463	
		KANARYA	2464	
		KOLOMNA	2465	
		LENINGRADSKY KOMSOMOLETS	2466	
		LSIL	2467	
		NEON ANTONOV	2468	
		NORWALK	2469	
		PT-61	2470	
		SGT MATEJ KOCAK	2471	
		THROSK	2472	
		TREE	2473	
		YANHANG	2474	
		YUNYY PARTIZAN	2475	
		UNDEFINED	2476 THROUGH 2521	
		AKL GENERAL	2522	
		ELTANIN	2523	
		KEYLA	2524	
		UNDEFINED	2525	
		LENTA	2526	
		UNDEFINED	2527	
		MP 4	2528	
		MP 6	2529	
		MUNA	2530	

5.1-1062

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		SEKSTAN	2531	
		TELNOVSK	2532	
		WISTING	2533	
		GORGONA	2534	
		UNDEFINED	2535 THROUGH 2549	
		AKR GENERAL	2550	
		ALGOL (SL 7)	2551	
		CALLAGHAN	2552	
		COMET	2553	
		METEOR	2554	
		DISUSED	2555	
		MAINE (CONVERTED)	2556	
		UNDEFINED	2557 THROUGH 2566	
		AFS GENERAL	2567	
		FORT	2568	
		UNDEFINED	2569	
		MARS	2570	
		RESOURCE	2571	
		UNDEFINED	2572 THROUGH 2580	
		AOE GENERAL	2581	
		SACRAMENTO	2582	
		SAGAMI	2583	
		UNDEFINED	2584 THROUGH 2593	
		AD GENERAL	2594	
		YELLOWSTONE	2595	
		SAMUEL GOMPERS	2596	
		DIXIE	2597	
		STALWART	2598	
		UNDEFINED	2599 THROUGH 2608	
		AWW GENERAL	2609	
		UNDEFINED	2610 THROUGH 2619	
		AH GENERAL	2620	
		HAVEN	2621	
		OB	2622	
		DISUSED	2623	
		UNDEFINED	2624 THROUGH 2632	
		AGB GENERAL	2633	
		DOBRYNYA NIKITICH	2634	
		HANSE	2635	
		IVANSUSANIN	2636	
		SHIRASE	2637	
		YANHA	2638	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		UNDEFINED	2639 THROUGH 2648	
		AGBL GENERAL	2649	
		EISVOGEL (TYPE 721)	2650	
		DISUSED	2651	
		UNDEFINED	2652 THROUGH 2661	
		AGI GENERAL	2662	
		ALPINIST	2663	
		ARMINZA	2664	
		UNDEFINED	2665	
		BALZAM	2666	
		BOLOGOE	2667	
		DISUSED	2668	
		HAM	2669	
		DISUSED	2670	
		DISUSED	2671	
		LENTA	2672	
		MAYAK	2673	
		MIRNYY	2674	
		MOMA	2675	
		NIKOLAY ZUBOV	2676	
		OKEAN	2677	
		DISUSED	2678	
		PAMIR	2679	
		PRIMORYE	2680	
		ALSTER (TYPE 423)	2681	
		UNDEFINED	2682 THROUGH 2705	
		ALS GENERAL	2706	
		UNDEFINED	2707 THROUGH 2716	
		AEM GENERAL	2717	
		AMGA	2718	
		ANDIZHAN (MODIFIED)	2719	
		LAMA	2720	
		MALINA	2721	
		MELITOPOL	2722	
		MP 6	2723	
		UNDEFINED	2724 THROUGH 2733	
		AGM GENERAL	2734	
		AGM-24	2735	
		GEN HOYT S VANDENBERG	2736	
		OBSERVATION ISLAND	2737	
		RANGE SENTINEL	2738	
		(HASKELL TYPE)		

FIELD CODING FOR J6.0E0

(SHEET 54)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		REDSTONE	2739	
		UNDEFINED	2740 THROUGH 2749	
		AGOR GENERAL	2750	
		ABKHAZIYA	2751	
		AKADEMIK KRYLOV	2752	
		ARAD	2753	
		BALIKPAPAN	2754	
		BELGICA	2755	
		DISUSED	2756	
		COOK	2757	
		D'ENTRECASTEAUX	2758	
		DOBRYNYA NIKITICH	2759	
		DONG MING	2760	
		ELTANIN	2761	
		ENDEAVOR	2762	
		FRANCESCO NULLO	2763	
		DISUSED	2764	
		GRIGORE ANTIPA	2765	
		GYRE	2766	
		HAYES	2767	
		HECLA	2768	
		MELVILLE	2769	
		MSC 60	2770	
		NAUTILUS	2771	
		NEVELSKOY	2772	
		NIKOLAY ZUBOV	2773	
		PITHEAS	2774	
		POLYUS	2775	
		QUEST	2776	
		ROBERT D CONRAD	2777	
		T-43	2778	
		TRITON	2779	
		TUI	2780	
		TYDEMAN	2781	
		XIANG YANG HONG	2782	
		YANLUN	2783	
		YUG	2784	
		ZENOBE GRAMME	2785	
		MAYAK	2786	
		UNDEFINED	2787 THROUGH 2823	
		AGOB GENERAL	2824	
		POLARSTERN	2825	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		UNDEFINED	2826 THROUGH 2835	
		AGOS GENERAL	2836	
		UNDEFINED	2837 THROUGH 2845	
		AO GENERAL	2846	
		UNDEFINED	2847	
		AKAR	2848	
		ALBAY BURBAK	2849	
		ALTAY	2850	
		UNDEFINED	2851	
		BASKUNCHAK	2852	
		BAYLEAF	2853	
		BINBASI GURGAN	2854	
		DISUSED	2855	
		CIMARRON	2856	
		CIMARRON (JUMBOISED)	2857	
		DORA	2858	
		HAMANA	2859	
		DISUSED	2860	
		DISUSED	2861	
		HENRY J KAISER	2862	
		IRTYSH	2863	
		KALININGRADNEFT	2864	
		KHOBİ	2865	
		KONDA	2866	
		METTAWEE	2867	
		MISPILLION (JUMBOISED)	2868	
		MOSKIT	2869	
		NEOSHO	2870	
		NERCHA	2871	
		NORWEGIAN BOW	2872	
		OLEKMA	2873	
		PATAPSCO	2874	
		PEVEK	2875	
		UNDEFINED	2876	
		SOFIYA	2877	
		SPESSART (TYPE 704A)	2878	
		TASKIZAK	2879	
		USEDOM	2880	
		WALCHENSEE (TYPE 703)	2881	
		WAVE	2882	
		DISUSED	2883	
		YUZBASI TOLUNAY	2884	

FIELD CODING FOR J6.0E0

(SHEET 56)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		BRAMBLELEAF	2885	
		UNDEFINED	2886 THROUGH 2936	
		AOT GENERAL	2937	
		AMERICAN EXPLORER	2938	
		AOTL	2939	
		EBANOL	2940	
		FULIN	2941	
		FUZHOU	2942	
		GUANZGHOU	2943	
		LEIZHOU	2944	
		MAUMEE	2945	
		METTAWEE	2946	
		MISSION	2947	
		POTOMOC	2948	
		SEALIFT	2949	
		SUAMICO	2950	
		T 5 TYPE	2951	
		TM2	2952	
		PORT VENDRES	2953	
		UNDEFINED	2954 THROUGH 2973	
		AOTL GENERAL	2974	
		DISUSED	2975	
		KH0BI	2976	
		UNDEFINED	2977 THROUGH 2986	
		AOR GENERAL	2987	
		BANDAR ABBAS	2988	
		BEREZINA	2989	
		BORIS CHILIKIN	2990	
		CAPITAN OLA PANTOJA	2991	
		DEEPAK	2992	
		DUBNA	2993	
		DURANCE	2994	
		FUQING	2995	
		KAZBEK	2996	
		KHARG	2997	
		MEERSBURG (TYPE 701C)	2998	
		MESAR	2999	
		OLWEN	3000	
		POOLSTER	3001	
		POLYARNIK	3002	
		PROTECTEUR	3003	
		PROVIDER	3004	

5.1-1067

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		ROVER	3005	
		SAO GABRIEL	3006	
		STROMBOLI	3007	
		TIDE (IMPROVED)	3008	
		UDA	3009	
		WICHITA	3010	
		FORT VICTORIA	3011	
		BERLIN (TYPE 702C)	3012	
		UNDEFINED	3013 THROUGH 3042	
		AORL GENERAL	3043	
		LEIZHOU	3044	
		UNDEFINED	3045 THROUGH 3054	
		AOL GENERAL	3055	
		PUNARUU	3056	
		UNDEFINED	3057 THROUGH 3065	
		AGP GENERAL	3066	
		GRAHAM COUNTY	3067	
		NORGE	3068	
		DISUSED	3069	
		MERCUUR	3070	
		UNDEFINED	3071 THROUGH 3079	
		AP GENERAL	3080	
		MIKHAIL KALININ	3081	
		PANDORA	3082	
		QIONGSHA	3083	
		UNDEFINED	3084 THROUGH 3093	
		AGR GENERAL	3094	
		UNDEFINED	3095 THROUGH 3104	
		AOSR GENERAL	3105	
		UNDEFINED	3106 THROUGH 3115	
		AR GENERAL	3116	
		ACHELOUS	3117	
		AJAX	3118	
		AMPHION	3119	
		AMUR	3120	
		ARL I	3121	
		DALIANG	3122	
		DILIGENCE	3123	
		DIXIE	3124	
		JULES VERNE	3125	
		OSKOL	3126	
		RHIN	3127	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		STALWART	3128	
		UNDEFINED	3129 THROUGH 3145	
		ARL GENERAL	3146	
		ARCHELOUS	3147	
		UNDEFINED	3148 THROUGH 3157	
		AGE GENERAL	3158	
		BELGICA	3159	
		BERRY	3160	
		UNDEFINED	3161	
		COMMANDANT RIVIERE	3162	
		DESN	3163	
		DOBRYNYA NIKITICH	3164	
		EF 3	3165	
		HENRI POINCARE	3166	
		ILE D'OLERON	3167	
		IVANSUSANIN	3168	
		KOLOMNA	3169	
		LENTA	3170	
		MARSHAL NEDELIN	3171	
		MOMA	3172	
		MP-8	3173	
		MUNA	3174	
		NARVIK	3175	
		OS-3	3176	
		POINT LOMA	3177	
		POTOK	3178	
		QUARTO	3179	
		SASHA	3180	
		SIBIR	3181	
		SO-1	3182	
		T-43	3183	
		TRITON	3184	
		DISUSED	3185	
		YAL 01	3186	
		YANXI	3187	
		ROSSETTI	3188	
		DENTI	3189	
		MONGE	3190	
		UNDEFINED	3191 THROUGH 3227	
		ARS GENERAL	3228	
		BOLSTER	3229	
		DISUSED	3230	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		INGUL	3231	
		KATUN I	3232	
		KATUN II	3233	
		KOWAN	3234	
		LSIL 351	3235	
		MIKHAIL RUDNITSKY	3236	
		OREL	3237	
		PAMIR	3238	
		PIAST	3239	
		PROTEO	3240	
		PS-11	3241	
		SAFEGUARD	3242	
		SILVA	3243	
		SPASILAC	3244	
		DISUSED	3245	
		US 149 FT	3246	
		YANDING	3247	
		UNDEFINED	3248 THROUGH 3273	
		ARSD GENERAL	3274	
		UNDEFINED	3275 THROUGH 3284	
		ASVR GENERAL	3285	
		UNDEFINED	3286 THROUGH 3295	
		AOS GENERAL	3296	
		ALATNA	3297	
		LUZA	3298	
		URAL	3299	
		VALA	3300	
		TONTI	3301	
		UNDEFINED	3302 THROUGH 3311	
		AF GENERAL	3312	
		CROITOR	3313	
		DANLIN	3314	
		MAYAK	3315	
		RIEGEL	3316	
		UNDEFINED	3317 THROUGH 3326	
		AKS GENERAL	3327	
		UNDEFINED	3328 THROUGH 3337	
		AKSL GENERAL	3338	
		UNDEFINED	3339 THROUGH 3348	
		AFL GENERAL	3349	
		UNDEFINED	3350 THROUGH 3359	
		ASR GENERAL	3360	

FIELD CODING FOR J6.0E0

(SHEET 60)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		ANTEO	3361	
		CHANTICLEER	3362	
		DAHIANG	3363	
		DALANG	3364	
		ELBRUS	3365	
		FEHMARN (TYPE 720B)	3366	
		FUSHIMI	3367	
		GALATI	3368	
		HUDONG	3369	
		KURTARAN	3370	
		NEPA	3371	
		PIGEON	3372	
		PRUT	3373	
		ROSLAVL	3374	
		SPASILAC	3375	
		VALDAY	3376	
		ZHONGHUA	3377	
		UNDEFINED	3378 THROUGH 3401	
		AS GENERAL	3402	
		ACHELOUS	3403	
		AEGIR	3404	
		DISUSED	3405	
		ATREK	3406	
		CHIYODA	3407	
		DADONG	3408	
		DAZHOU	3409	
		DIVER	3410	
		DNEPR	3411	
		DNEPR (MODIFIED)	3412	
		DON	3413	
		EMORY S LAND	3414	
		FULTON	3415	
		HUNLEY	3416	
		L Y SPEAR	3417	
		PROTEUS	3418	
		DISUSED	3419	
		SIMON LAKE	3420	
		UGRA	3421	
		UNDEFINED	3422 THROUGH 3447	
		ASL GENERAL	3448	
		UNDEFINED	3449 THROUGH 3458	
		AGS GENERAL	3459	

5.1-1071

MIL-STD-6016B

FIELD CODING FOR J6.0E0

(SHEET 61)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		AGS 39 CLASS	3460	
		AKASHI	3461	
		ALMEIDA CARVALHO	3462	
		AMMIRAGLIO MAGNAGHI	3463	
		ANDRIJA MOHOROVICIC	3464	
		AUK	3465	
		BIYA	3466	
		BOLOGUE	3467	
		UNDEFINED	3468	
		BUYSKES	3469	
		C4-S-A1 TYPE (CONVERTED)	3470	
		CHAUVENET	3471	
		COOK	3472	
		DING HAI	3473	
		FINIK	3474	
		FS DESIGN 330	3475	
		FUTAMI	3476	
		HAMASHIO	3477	
		HEIYO	3478	
		KAIBOKAN I	3479	
		KAIYO	3480	
		KAMENKA	3481	
		DISUSED	3482	
		UNDEFINED	3483	
		L'ESPERANCE	3484	
		UNDEFINED	3485	
		LENTRA	3486	
		LSIL	3487	
		MEIYO	3488	
		MELITOPOL	3489	
		MOMA	3490	
		MONOWAI	3491	
		MORESBY	3492	
		MP-8	3493	
		MSC-294 (BLUEBIRD)	3494	
		NYRYAT I	3495	
		NYRYAT II	3496	
		SAMARA	3497	
		SHOYO	3498	
		SILAS BENT	3499	
		STERNE	3500	
		SUMA	3501	

FIELD CODING FOR J6.0E0

(SHEET 62)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		T-43	3502	
		TAKUYO	3503	
		TELNOVSK	3504	
		TELNOVSK (MODIFIED)	3505	
		TENYO	3506	
		VICTORY (CONVERTED)	3507	
		WILKES	3508	
		YANLAI	3509	
		YANXU	3510	
		MIRTO	3511	
		MARS	3512	
		LAPEROUSE	3513	
		UNDEFINED	3514 THROUGH 3579	
		AGSA GENERAL	3580	
		UNDEFINED	3581 THROUGH 3590	
		AGSC GENERAL	3591	
		EXPLORER	3592	
		FLINDERS	3593	
		TAINO	3594	
		BULLDOG	3595	
		ROEBUCK	3596	
		UNDEFINED	3597 THROUGH 3604	
		AX GENERAL	3605	
		ARIS	3606	
		DISUSED	3607	
		JADRAN	3608	
		JERVIS BAY	3609	
		JOSE MARTI	3610	
		MP-8	3611	
		SMOLNY	3612	
		UGRA	3613	
		VIETNAM HEROICO	3614	
		WODNIK	3615	
		UNDEFINED	3616 THROUGH 3630	
		AXL GENERAL	3631	
		UNDEFINED	3632	
		LEOPARD	3633	
		MAYAK	3634	
		UNDEFINED	3635 THROUGH 3642	
		AXS GENERAL	3643	
		AMERIGO VESPUCCI	3644	
		CAROLY	3645	

5.1-1073

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		CARSARO II	3646	
		GORCH FOCK (TYPE 441A)	3647	
		MIRCEA	3648	
		PALINURO	3649	
		SAGRES	3650	
		STELLA POLARE	3651	
		UNDEFINED	3652	THROUGH 3659
		AT GENERAL	3660	
		UNDEFINED	3661	THROUGH 3665
		ATA GENERAL	3666	
		ABNAKI	3667	
		APACHE	3668	
		ARMY 254	3669	
		ATAK	3670	
		ATLANTE	3671	
		AZUMA	3672	
		BELIER	3673	
		UNDEFINED	3674	
		GAJ	3675	
		GNIEWKO	3676	
		GORYN	3677	
		GROMOVOY	3678	
		KUDRET	3679	
		MAITO	3680	
		MB-31	3681	
		MB-65	3682	
		MOTYL	3683	
		OKHTENSKIY	3684	
		ONCU	3685	
		POWHATAN	3686	
		ROSLAVL	3687	
		ROYSTERER	3688	
		SAINT	3689	
		SCHULTZ XAVIER	3690	
		SORUM	3691	
		TENACE	3692	
		TUZHONG	3693	
		TYPHOON	3694	
		WANGER00GE (TYPE 722B)	3695	
		ZENIT	3696	
		MAITO	3697	
		ARMEN	3698	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		UNDEFINED	3699 THROUGH 3737	
		ATR GENERAL	3738	
		TENACE	3739	
		UNDEFINED	3740 THROUGH 3748	
		ATS GENERAL	3749	
		EDENTON	3750	
		OKHTENSKY	3751	
		LANGEOOG (TYPE 754)	3752	
		ARGUS	3753	
		UNDEFINED	3754 THROUGH 3762	
		AWT GENERAL	3763	
		UNDEFINED	3764	
		BASENTO	3765	
		FUZHOU (MODIFIED)	3766	
		KANGAN	3767	
		LEIZHOU (MODIFIED)	3768	
		LSIL	3769	
		MANYCH	3770	
		MINCIO	3771	
		PIAVE	3772	
		TEVERE	3773	
		ULUBAT	3774	
		VODA	3775	
		YW-83	3776	
		Z	3777	
		UNDEFINED	3778 THROUGH 3797	
		SERVICE CRAFT GENERAL	3798	
		BARGE, GENERAL	3799	
		YO GENERAL	3800	
		YOG GENERAL	3801	
		YHT GENERAL	3802	
		YRNS GENERAL	3803	
		YOS GENERAL	3804	
		YPK GENERAL	3805	
		YRR GENERAL	3806	
		YRB GENERAL	3807	
		YRST GENERAL	3808	
		YOM GENERAL	3809	
		YOSS GENERAL	3810	
		YW GENERAL	3811	
		UNDEFINED	3812 THROUGH 3827	
		YD GENERAL	3828	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		YM GENERAL	3829	
		YFD GENERAL	3830	
		YFP GENERAL	3831	
		YGT GENERAL	3832	
		YR GENERAL	3833	
		UNDEFINED	3834 THROUGH 3840	
		YFD GENERAL	3841	
		YFDB GENERAL	3842	
		YFDM GENERAL	3843	
		YFDL GENERAL	3844	
		UNDEFINED	3845 THROUGH 3850	
		YRD GENERAL	3851	
		YRDB GENERAL	3852	
		YRDM GENERAL	3853	
		YRDL GENERAL	3854	
		UNDEFINED	3855 THROUGH 3861	
		LIGHTER GENERAL	3862	
		YE GENERAL	3863	
		YF GENERAL	3864	
		YFC GENERAL	3865	
		YFR GENERAL	3866	
		YC GENERAL	3867	
		YFT GENERAL	3868	
		UNDEFINED	3869 THROUGH 3878	
		YT GENERAL	3879	
		YTB GENERAL	3880	
		YTM GENERAL	3881	
		YTL GENERAL	3882	
		UNDEFINED	3883 THROUGH 3892	
		YAGF GENERAL	3893	
		YAG GENERAL	3894	
		YV GENERAL	3895	
		YNG GENERAL	3896	
		YP GENERAL	3897	
		YFU GENERAL	3898	
		YAM GENERAL	3899	
		YNC GENERAL	3900	
		YLC GENERAL	3901	
		YVS GENERAL	3902	
		YRG GENERAL	3903	
		YAGT GENERAL	3904	
		YPT GENERAL	3905	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		YRC GENERAL	3906	
		YDT GENERAL	3907	
		YNT GENERAL	3908	
		YH GENERAL	3909	
		YFB GENERAL	3910	
		YTR GENERAL	3911	
		YFL GENERAL	3912	
		YAC GENERAL	3913	
		YSR GENERAL	3914	
		YSG GENERAL	3915	
		YDG GENERAL	3916	
		KHABAROV	3917	
		UNDEFINED	3918 THROUGH 3936	
		TM GENERAL	3937	
		TMD GENERAL	3938	
		TMB GENERAL	3939	
		TMK GENERAL	3940	
		TMF GENERAL	3941	
		TMC GENERAL	3942	
		TMCS GENERAL	3943	
		TMWW GENERAL	3944	
		TMA GENERAL	3945	
		TMH GENERAL	3946	
		TMGB GENERAL	3947	
		TMI GENERAL	3948	
		TML GENERAL	3949	
		TMOT GENERAL	3950	
		TMM GENERAL	3951	
		TMP GENERAL	3952	
		TMFR GENERAL	3953	
		TMR GENERAL	3954	
		TMOR GENERAL	3955	
		TMOL GENERAL	3956	
		TME GENERAL	3957	
		TMGS GENERAL	3958	
		TMLS GENERAL	3959	
		TMS GENERAL	3960	
		TMOS GENERAL	3961	
		TMO GENERAL	3962	
		TMX GENERAL	3963	
		TMWT GENERAL	3964	
		UNDEFINED	3965 THROUGH 3989	

FIELD CODING FOR J6.0E0

(SHEET 67)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		TMT GENERAL	3990	
		TMTR GENERAL	3991	
		TMTS GENERAL	3992	
		UNDEFINED	3993 THROUGH 4002	
		TU GENERAL	4003	
		TUF GENERAL	4004	
		TUB GENERAL	4005	
		TUI GENERAL	4006	
		TUR GENERAL	4007	
		TUT GENERAL	4008	
		TUS GENERAL	4009	
		TUC GENERAL	4010	
		TUW GENERAL	4011	
		UNDEFINED	4012 THROUGH 4023	
		TJ GENERAL	4024	
		TJF GENERAL	4025	
		TJC GENERAL	4026	
		TJCS GENERAL	4027	
		TJGB GENERAL	4028	
		UNDEFINED	4029 THROUGH 4038	
		TS GENERAL	4039	
		TSG GENERAL	4040	
		TSR GENERAL	4041	
		UNDEFINED	4042 THROUGH 4052	
		MPS GENERAL	4053	
		UNDEFINED	4054 THROUGH 4069	
		SURFACE SPECIFIC TYPE	4070 THROUGH 4094	
		1-25		
		RESET TO NO STATEMENT	4095	

809	001	SUBSURFACE (MARITIME) SPECIFIC TYPE		THE SPECIFIC TYPE OF POINT OR TRACK WITH AN ENVIRONMENT/CATEGORY OF SUBSURFACE (MARITIME).

		NO STATEMENT	0	
		SS GENERAL	1	
		ABTAO SS	2	
		DISUSED	3	
		DISUSED	4	
		UNDEFINED	5	
		DISUSED	6	
		GUPPY II SS	7	
		GUPPY IIA SS	8	

5.1-1078

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
809	001	SUBSURFACE (MARITIME) SPECIFIC (CONTINUED) TYPE		

		GUPPY III SS	9	
		HAI LUNG SS	10	
		DISUSED	11	
		SAURO (TYPE 1081) SS	12	
		SAURO (IMPROVED) SS	13	
		TANG SS	14	
		TYPE SNA 72 SS	15	
		UZUSHIO SS	16	
		WALRUS SS	17	
		YUUSHIO SS	18	
		UNDEFINED	19	
		DISUSED	20	
		PELOSI SS	21	
		UNDEFINED	22 THROUGH 360	
		SSB GENERAL	361	
		GOLF SSB	362	
		GOLF II SSB	363	
		GOLF III SSB	364	
		GOLF V SSB	365	
		UNDEFINED	366 THROUGH 440	
		SSBN GENERAL	441	
		BENJAMIN FRANKLIN SSBN	442	
		DELTA I SSBN	443	
		DELTA II SSBN	444	
		DELTA III SSBN	445	
		DELTA IV SSBN	446	
		HOTEL III SSBN	447	
		DISUSED	448	
		L'INFLEXIBLE SSBN	449	
		DISUSED	450	
		UNDEFINED	451	
		OHIO SSBN	452	
		RESOLUTION SSBN	453	
		TYPHOON SSBN	454	
		VANGUARD SSBN	455	
		YANKEE SSBN	456	
		YANKEE I SSBN	457	
		YANKEE II SSBN	458	
		XIA SSBN	459	
		LE TERRIBLE SSBN	460	
		UNDEFINED	461 THROUGH 720	
		SSN GENERAL	721	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
809	001	SUBSURFACE (MARITIME) SPECIFIC (CONTINUED)		
		TYPE		

		AKULA SSN	722	
		ALFA SSN	723	
		AMATHEPT SSN	724	
		CHARLIE/VICTOR SSGN/SSN	725	
		CHURCHILL SSN	726	
		ECHO/NOVEMBER SSGN/SSN	727	
		DISUSED	728	
		DISUSED	729	
		HAN SSN	730	
		HOTEL SSN	731	
		LOS ANGELES SSN	732	
		MIKE SSN	733	
		NARWHAL SSN	734	
		DISUSED	735	
		RUBIS SSN	736	
		SEAWOLF SSN	737	
		SIERRA SSN	738	
		DISUSED	739	
		DISUSED	740	
		STURGEON SSN	741	
		SWIFTSURE SSN	742	
		TRAFALGAR SSN	743	
		DISUSED	744	
		VICTOR I SSN	745	
		VICTOR II SSN	746	
		VICTOR III SSN	747	
		YANKEE SSN	748	
		VIRGINIA SSN	749	
		UNDEFINED	750 THROUGH 1200	
		SSG GENERAL	1201	
		JULIETT SSG	1202	
		UNDEFINED	1203 THROUGH 1245	
		SSGN GENERAL	1246	
		CHARLIE I SSGN	1247	
		CHARLIE II SSGN	1248	
		ECHO II SSGN	1249	
		OSCAR SSGN	1250	
		PAPA SSGN	1251	
		UNDEFINED	1252 THROUGH 1345	
		SSK GENERAL	1346	
		AGOSTA SSK	1347	
		UNDEFINED	1348	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
809	001	SUBSURFACE (MARITIME) SPECIFIC (CONTINUED)		
		TYPE		

		FOXTROT SSK	1349	
		HEROJ SSK	1350	
		KILO SSK	1351	
		MING SSK	1352	
		NARVAL SSK	1353	
		DISUSED	1354 THROUGH 1355	
		ROMEO SSK	1356	
		SAVA SSK	1357	
		SUTJESKA SSK	1358	
		TANGO SSK	1359	
		UPHOLDER SSK	1360	
		WHISKEY SSK	1361	
		WHISKEY V SSK	1362	
		ZULU IV SSK	1363	
		DORIS SSK	1364	
		VICTORIA SSK	1365	
		TYPE 212 SSK	1366	
		UNDEFINED	1367 THROUGH 1665	
		SSC GENERAL	1666	
		DELFINEN SSC	1667	
		DRAKEN SSC	1668	
		NAECKEN SSC	1669	
		NARHVALEN SSC	1670	
		SJOORMEN SSC	1671	
		TOTI TYPE 1075 SSC	1672	
		TYPE 205 SSC	1673	
		TYPE 206 SSC	1674	
		KOBHEN SSC	1675	
		TYPE 209 (TYPE 1100) SSC	1676	
		TYPE 209 (TYPE 1200) SSC	1677	
		TYPE 209 (TYPE 1300) SSC	1678	
		TYPE 209 (TYPE 1400) SSC	1679	
		TYPE 209 (TYPE 1500) SSC	1680	
		ULA SSC	1681	
		TYPE 211 SSC	1682	
		VASTERGOETLAND SSC	1683	
		TYPE 206A SSC	1684	
		UNDEFINED	1685 THROUGH 1945	
		SSA GENERAL	1946	
		BRAVO SSA	1947	
		DOLPHIN (AGSS) SSA	1948	
		GOLF I SSA	1949	

FIELD CODING FOR J6.0E0

(SHEET 71)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

809	001	SUBSURFACE (MARITIME) SPECIFIC (CONTINUED) TYPE		

		GOLF I (MODIFIED) SSA	1950	
		GOLF II SSA	1951	
		INDIA SSA	1952	
		LIMA SSA	1953	
		ROMEO SSA	1954	
		ZULU SSA	1955	
		UNDEFINED	1956 THROUGH 4069	
		SUBSURFACE SPECIFIC TYPE 1-25	4070 THROUGH 4094	
		RESET TO NO STATEMENT	4095	

810	001	LAND (GROUND) SPECIFIC TYPE		

THE SPECIFIC TYPE OF POINT OR TRACK
WITH AN ENVIRONMENT/CATEGORY OF
LAND (GROUND).

NO STATEMENT	0
TOW	1
DRAGON	2
LANCE	3
SHILLEAGH	4
SERGEANT	5
AMMUNITION	6
POL	7
OBSERVATION POSTS	8
RADIO DIRECTION FINDER	9
RIVER	10
STREAM	11
LAKE	12
MARSH/SWAMP	13
MOUNTAIN	14
HILLTOP	15
RIDGE	16
DEPRESSION	17
VALLEY	18
CAVE	19
BRIDGE	20
DAM	21
BUILDING	22
VILLAGE	23
TOWN	24
ROAD INTERSECTION	25
HOSPITAL	26
HAWK	27

5.1-1082

MIL-STD-6016B

FIELD CODING FOR J6.0E0

(SHEET 72)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE -----	(CONTINUED)	
		I-HAWK	28	
		PATRIOT	29	
		NIKE	30	
		REDEYE	31	
		STINKER	32	
		HELLFIRE	33	
		PERSHING	34	
		JEEP	35	
		CAR	36	
		MOTORCYCLE	37	
		BICYCLE	38	
		AMPHIBIOUS VEHICLE	39	
		RIVER CROSSING EQUIPMENT	40	
		MECHANIZED MINE SWEEPER	41	
		MOBILE RADAR	42	
		SMOKE GENERATOR	43	
		(SSSB) SHIP SHORE SHIP BUFFER	44	
		(RADIL) ROCC AWACS	45	
		DIGITAL INTERFACE LINK		
		(ASIT) ADAPTABLE SURFACE	46	
		INTERFACE TERMINAL		
		(AEGIS) AEW GROUND	47	
		INTERFACE SEGMENT		
		AMBULANCE	48	
		BIOLOGICAL WEAPONS	49	
		CHEMICAL WEAPONS	50	
		NUCLEAR WEAPONS	51	
		ENGINEER VEHICLES	52	
		GENERATOR	53	
		JAMMERS	54	
		MAINTENANCE VEHICLE	55	
		MULTIPLE ROCKET LAUNCHER	56	
		RADIO	57	
		REMOTE SENSOR	58	
		SELF PROPELLED ARTILLERY	59	
		TACTICAL BRIDGE	60	
		TOWED ARTILLERY GUN	61	
		RECOILLESS RIFLE	62	
		(TACCP) TACTICAL COMMAND POST	63	
		BRIGADE	64	
		CORPS	65	

5.1-1083

MIL-STD-6016B

FIELD CODING FOR J6.0E0

(SHEET 73)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE -----	(CONTINUED)	
		GROUP	66	
		DIVISION	67	
		REGIMENT	68	
		BATTALION	69	
		COMPANY	70	
		PLATOON	71	
		SQUADRON	72	
		AIRBASE	73	
		WING	74	
		ANTI-AIRCRAFT GUN	75	
		AIR DEFENSE ARTILLERY GUN	76	
		MORTAR	77	
		FLAMETHROWER	78	
		TSC/MOCC/MARITIME HEADQUARTERS	79	
		MAIN BATTLE TANK	80	
		MEDIUM TANK	81	
		LIGHT TANK	82	
		TRAIN	83	
		ARMORED PERSONNEL VEHICLE	84	
		ARMORED INFANTRY FIGHTING VEHICLE	85	
		LIGHT TRUCK	86	
		MEDIUM TRUCK	87	
		HEAVY TRUCK	88	
		TANK TRANSPORTER	89	
		DUMMY	90	
		TRAP	91	
		POINT TARGET	92	
		EA SITE	93	
		ARMORED PERSONNEL CARRIER	94	
		ARMORED INFANTRY FIGHTING VEHICLE	95	
		GCI SITE	96	
		CRC	97	
		TACC (AF)	98	
		CRP	99	
		TACC (MC)	100	
		MPC	101	
		TAOC	102	

FIELD CODING FOR J6.0E0

(SHEET 74)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		AADCCS (AN/TSQ-73)	103	
		DASC	104	
		FACP	105	
		FASC	106	
		AADCP	107	
		ASRT	108	
		NCC	109	
		RCC	110	
		ROCC	111	
		DC	112	
		WOC	113	
		(ASOC) AIR SUPPORT	114	
		OPERATIONS CENTER		
		(TCO) TACTICAL COMBAT	115	
		OPERATIONS CENTER		
		(TOC) TACTICAL	116	
		OPERATIONS CENTER		
		(ARMY)		
		CHAPPARAL	117	
		FIRE DIRECTION CENTER	118	
		FIRE UNIT	119	
		DIVARTY	120	
		BATTERY	121	
		SELF-PROPELLED ARTILLERY	122	
		(GOC) GROUND OPERATIONS	123	
		CENTER		
		(ICC) INFORMATION	124	
		COORDINATION CENTER		
		(BOC) BATTERY OPERATIONS	125	
		CENTER		
		(ECS) ENGAGEMENT CONTROL	126	
		STATION		
		(PCP) PLATOON COMMAND	127	
		POST		
		(CRG) COMMUNICATIONS	128	
		RELAY GROUP		
		TUNNELS	129	
		RAILYARDS	130	
		BENCHMARK	131	
		TROOP	132	
		LANDING ZONE	133	
		DROP ZONE	134	
		ASSEMBLY OR STAGING AREA	135	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		DECONTAMINATION SITE	136	
		RE-ENTRY POINT/LINE	137	
		CROSSING AREA FOR		
		RECON PATROLS		
		SAM	138	
		SSM	139	
		ANTI-TANK WEAPON	140	
		DIRECT SUPPORT	141	
		GENERAL SUPPORT	142	
		INTERCEPTION	143	
		BLOCKING	144	
		REINFORCING	145	
		REDEPLOYMENT	146	
		POLICING	147	
		INTRUDING	148	
		PREPARING BARRIER	149	
		DUMPING EQUIPMENT	150	
		RELIEF	151	
		CONVOY	152	
		ANTI-AIRCRAFT	153	
		AIR DEFENSE ARTILLERY	154	
		ARTILLERY	155	
		SURVEILLANCE	156	
		PICKETING	157	
		LOGISTICS SUPPORT	158	
		SEARCH	159	
		DIRECT ARTILLERY SUPPORT	160	
		GENERAL ARTILLERY	161	
		SUPPORT		
		MAINTAINING LINE OF	162	
		COMMUNICATION		
		COMMITTING	163	
		COUNTER-ATTACK	164	
		ELECTRONIC WARFARE	165	
		THREATEN	166	
		DESTROY	167	
		CONTACT	168	
		EVALUATION	169	
		TRANSPORTER	170	
		ARMORED VEHICLE	171	
		GUN	172	
		HALF TRACK	173	
		COMMUNICATIONS EQUIPMENT	174	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	
		TARGET	175	
		AIR DEFENSE SITE	176	
		FIM-92 STINGER	177	
		NIM-23 HAWK	178	
		MIM-42 REDEYE	179	
		MIM-72 CHAPARRAL	180	
		MIM-104 PATRIOT	181	
		RIM-2 TERRIER	182	
		RIM-7 SEA SPARROW	183	
		RIM-8 TALOS	184	
		RIM-24 TARTAR	185	
		RIM-66 STANDARD MISSILE	186	
		RIM-67 STANDARD MISSILE	187	
		BLOWPIPE	188	
		DISUSED	189 THROUGH 190	
		SEA DART	191	
		DISUSED	192 THROUGH 193	
		CROTALE	194	
		RAPIER	195	
		RBS-70/GIRAFFE	196	
		SAM BLOODHOUND	197	
		SAM ROLAND	198	
		SA-2 GUIDELINE	199	
		SA-3 GOA	200	
		SA-4 GANEF	201	
		SA-N-3 GOBLET	202	
		SA-5 GAMMON	203	
		SA-N-4 GECKO	204	
		SA-6 GAINFUL	205	
		SA-N-6 GRUMBLE	206	
		SA-7 GRAIL	207	
		SA-8 GECKO	208	
		SA-9 GASKIN	209	
		SA-10 GRUMBLE	210	
		SA-11 GADFLY	211	
		SA-12	212	
		SA-13 GOPHER	213	
		MISTRAL	214	
		SA-N-7 GADFLY	215	
		SA-N-8 GREMLIN	216	
		SA-14 GREMLIN	217	
		SA-16 GIMLET	218	
		SA-X-17	219	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE -----	(CONTINUED)	
		TOC (THAAD)	220	
		SSI (THAAD)	221	
		LCS (THAAD)	222	
		LAUNCHER (THAAD)	223	
		TMD-GBR (THAAD)	224	
		JTAGS	225	
		ADTOC/BN	226	
		ADTOC/BDE	227	
		ADCP	228	
		SM-2 BLOCK II	229	
		SM-2 BLOCK III	230	
		SM-2 BLOCK IIIA	231	
		SM-2 BLOCK IIIB	232	
		SM-2 BLOCK IV	233	
		SM-2 BLOCK IVA	234	
		SM-3 LEAP	235	
		SA-N-5 GRAIL	236	
		SA-N-11 GRISOM	237	
		SA-12A GLADIATOR	238	
		SA-12B GIANT	239	
		SA-14 GREMLIN	240	
		SA-15 GAUNTLET	241	
		SA-17 GRIZZLY	242	
		SA-N-12 GRIZZLY	243	
		SA-18 GROUSE	244	
		SA-19 GRISOM	245	
		RIM-116 RAM	246	
		ADATS	247	
		JAVELIN	248	
		STARBURST	249	
		STARSTREAK	250	
		ASPIDER	251	
		FRONT DOOR	252	
		ROLAND II	253	
		AKASH	254	
		ANZA	255	
		ANZA II	256	
		CSA-1	257	
		CSA-2	258	
		CSA-4	259	
		CSA-5	260	
		FM-80	261	
		HN-5	262	

FIELD CODING FOR J6.0E0

(SHEET 78)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		NK-7	263	
		NK-16	264	
		PANTZYR	265	
		RAPIER 2000/JERNAS	266	
		RBS-90	267	
		SAKR	268	
		SAVA	269	
		SHANINE	270	
		SKYGUARD ASPIDE	271	
		SPADA	272	
		TAM SAM	273	
		TIGERCAT	274	
		VANGUARD	275	
		SA-N-1 GOA	276	
		SA-N-9 GAUNTLET	277	
		SA-N-10	278	
		ALBATROS/ASPIDE	279	
		SM-1	280	
		SA-2 IRAQ MOD	281	
		SA-2 NORTH KOREA RO	282	
		AEGIS-TI	283	
		MASURGS	284	
		ROCK CAKE	285	
		SEA INDIGO	286	
		TANSAM	287	
		TOKEN A/D	288	
		GUARDSMAN	289	
		SILKWORM	290	
		SNOW DRIFT 11/17	291	
		TIGER S	292	
		TIGER G	293	
		TUBE ARM SA-11	294	
		SEACAT 262/903/904	295	
		AN/MPQ-4	296	
		AN-TPQ-36	297	
		AN/TPS-25	298	
		CYMBERLINE	299	
		PORK TROUGH 1	300	
		RASIT	301	
		SNAR-6	302	
		TALL MIKE	303	
		AN/FPN-33/36/40	304	
		AN/TPN-12/17	305	

5.1-1089

MIL-STD-6016B

FIELD CODING FOR J6.0E0

(SHEET 79)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE -----	(CONTINUED)	
		CPN-4, FPN-16/22	306	
		RP-2E	307	
		RP-4G	308	
		THD-1010/1013	309	
		TPN-8/14/18TSQ-7	310	
		TWO SPOT	311	
		CSA-X-2	312	
		ASR-0	313	
		FALCON-G	314	
		MARCON LN66TPS66	315	
		SHEET BEND	316	
		WALL RUST A/B	317	
		DON-2	318	
		DONKAY/PALM FROND	319	
		EYE SHIELD	320	
		MARELD	321	
		PEEL PAIR	322	
		POT HEAD	323	
		RACAL-DECCA	324	
		RICE FIELD	325	
		RICE SCREEN	326	
		RICE CUP	327	
		SQUARE TIE	328	
		SS-N-2	329	
		STRUT CURVE	330	
		STRUT PAIR	331	
		BOFI	332	
		CORN CAN	333	
		DRUM TILT	334	
		ELDORADO	335	
		FLAP WHEEL	336	
		FLEDERMAUS	337	
		FLYCATCHER	338	
		GEPARD	339	
		GUN DISH	340	
		SPAAMG	341	
		TEAMPLAY	342	
		TEAMWORK	343	
		VULCAN	344	
		9LV 200	345	
		AN/SPG-50	346	
		BASS TILT	347	
		GOALKEEPER	348	

5.1-1090

MIL-STD-6016B

FIELD CODING FOR J6.0E0

(SHEET 80)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		HAWK SCREECH	349	
		KITE SCREECH A/B	350	
		OWL SCREECH	351	
		MARK 68 FCS	352	
		MK 57/63 GFCS	353	
		MK-86 GFCS	354	
		MUFF COB	355	
		SIGNAAL STIR 180	356	
		SUN VISOR	357	
		TOP BOW	358	
		TYPE 341	359	
		VEGA	360	
		WM-20 SERIES	361	
		MARCONI S613	362	
		THIN SKIN	363	
		AN/FPS-77	364	
		MRL-1	365	
		MRL-4/5	366	
		BIG BIRD	367	
		SIDE NET	368	
		ODD LOT/PAIR/GROUP	369	
		FIRE WHEEL/MOD	370	
		BARLOCK	371	
		FIRECAN/WHIFF	372	
		GIN SLING	373	
		FRUSKA GORA	374	
		TIN SHIELD	375	
		BIG BAR/MESH	376	
		SS-N-S SCOOP PAIR	377	
		SGR-105 DA-01/00	378	
		CROSS SLOT	379	
		BACK NET/TRAP	380	
		GATE POLE/HIGH/POST	381	
		TOP LOT	382	
		RICE CAKE	383	
		JY-14/9	384	
		TIN TRAP	385	
		HEAD NET A/B/C	386	
		SLIM/SEA/HAIR NET	387	
		LOW SIEVE	388	
		EGG CUP	389	
		CUT WEB	390	
		SKYWATCH	391	

5.1-1091

MIL-STD-6016B

FIELD CODING FOR J6.0E0

(SHEET 81)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE -----	(CONTINUED)	
		HALF PLATE	392	
		SKIN HEAD	393	
		SIEVE FAMILY	394	
		SO-A	395	
		HIGH SHELL	396	
		AN/FPS-6/89	397	
		DECCA HF200	398	
		MARCONI 5244	399	
		TYPE 88 MK 1	400	
		MARCONI S-247	401	
		AN/MPN-11	402	
		RAT-31S	403	
		AA4 MK 6/7	404	
		AN/TPS-43	405	
		SCR-584	406	
		AN/TPS-48	407	
		MARCONI S-1006/269	408	
		PALMIER	409	
		FIREFINDER LR	410	
		VOLEX III/IV	411	
		THD-1940	412	
		HADR (HR-3000)	413	
		AN/RPS-70/72/75	414	
		MPDR-18/S	415	
		WATCHMAN	416	
		MARCONI S-631/647	417	
		MARCONI S-706/711/712	418	
		AN/TPS-73	419	
		TRS-22XX	420	
		AN/SPS-8	421	
		DECCA AWS-1	422	
		MK-26	423	
		AN/SPS-48	424	
		RAN-7S	425	
		SEA TIGER	426	
		DA-08/2LS	427	
		AWS-9 (TYPE 996)	428	
		DA-05/00	429	
		MPDR-45	430	
		TOP STEER/PLATE	431	
		STRIKE OUT	432	
		SPONGE CAKE	433	
		NC1 ROLAND	434	

5.1-1092

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE -----	(CONTINUED)	
		NC1 MISTRAL	435	
		FDOC	436	
		MCT	437	
		CETAC	438	
		ISARD	439	
		UNDEFINED	440 THROUGH 4000	
		WAYPOINT	4001	
		STRIKE INITIAL POINT	4002	
		UNDEFINED	4003 THROUGH 4093	
		RESET TO NO STATEMENT	4094	
		UNDEFINED	4095	
1661	002	TYPE MODIFICATION -----		AN ALPHA CHARACTER SUFFIX USED TO DESIGNATE A CERTAIN VERSION OF AN ALPHA/NUMERIC AIRCRAFT DESIGNATOR.
		NO STATEMENT	0	
		A	1	
		B	2	
		C	3	
		D	4	
		E	5	
		F	6	
		G	7	
		H	8	
		I	9	
		J	10	
		K	11	
		L	12	
		M	13	
		N	14	
		0	15	
		P	16	
		Q	17	
		R	18	
		S	19	
		T	20	
		U	21	
		V	22	
		W	23	
		X	24	
		Y	25	
		Z	26	
		ILLEGAL	27 THROUGH 31	

DFI	DUI	DUI/DI NAME
769	010	TRACK NUMBER, OBJECTIVE

DUI/DI EXPLANATION

THE TN OF THE OBJECT OF THE ACTION DESCRIBED IN THE MESSAGE.

THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE-BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANNN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6
00111	7
01000	A
01001	B
01010	C
01011	D
01100	E
01101	F
01110	G
01111	H
10000	J

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	010	TRACK NUMBER, OBJECTIVE -----	(CONTINUED)	
				10001 K
				10010 L
				10011 M
				10100 N
				10101 P
				10110 Q
				10111 R
				11000 S
				11001 T
				11010 U
				11011 V
				11100 W
				11101 X
				11110 Y
				11111 Z
		00000	0	NO STATEMENT.
		00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		00077	63	ILLEGAL.
		00100-00175	64 THROUGH 125	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		00176	126	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		00177	127	COLLECTIVE ADDRESS.
		00200-07776	128 THROUGH 4094	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		07777	4095	ILLEGAL.
		0A000-0Z777	4096 THROUGH 16383	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		10000-17777	16384 THROUGH 20479	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.

5.1-1095

MIL-STD-6016B

FIELD CODING FOR J6.0E0

(SHEET 85)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	010	TRACK NUMBER, OBJECTIVE -----	(CONTINUED)	
		20000-27777	32768 THROUGH 36863	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION

5.1-1096

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	010	TRACK NUMBER, OBJECTIVE -----	(CONTINUED)	
		70000-77776	114688 THROUGH 118782	REPORTING, E.G., TRACKS AND REFERENCE POINTS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
754	001	LOCAL DISCRETE IDENTIFIER -----		LOCALLY DEFINED AMPLIFYING DATA CON- CERNING A REPORTED OBJECT OR TRACK WITH DISCRETE MEANINGS ESTABLISHED BY THE OPERATIONAL COMMANDER.
		NO STATEMENT	0	
		NUMERIC	1 THROUGH 4094	LOCALLY DEFINED MEANINGS.
		RESET TO NO STATEMENT	4095	
769	031	TRACK NUMBER, CONTROLLING AGENCY OF TN REFERENCE -----		THE TN THAT IDENTIFIES THE AGENCY THAT IS CONTROLLING THE REFERENCE TN. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE- BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANNN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC

5.1-1097

MIL-STD-6016B

DFI DUI DUI/DI NAME DI BIT CODE DUI/DI EXPLANATION

769 031 TRACK NUMBER, CONTROLLING (CONTINUED)
AGENCY OF TN REFERENCE

CHARACTER IS SHOWN BELOW. CODING
FOR A THREE BIT NUMERIC CHARACTER
IS EXACTLY THE SAME AS ZERO
THROUGH SEVEN OF THE FIVE BIT
ALPHANUMERIC CHARACTER WITH THE
FIRST TWO LEADING ZEROES DELETED.

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6
00111	7
01000	A
01001	B
01010	C
01011	D
01100	E
01101	F
01110	G
01111	H
10000	J
10001	K
10010	L
10011	M
10100	N
10101	P
10110	Q
10111	R
11000	S
11001	T
11010	U
11011	V
11100	W
11101	X
11110	Y
11111	Z

00000 0
00001-00076 1 THROUGH 62

NO STATEMENT.
ASSIGNED AS IDENTIFICATION NUMBERS

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	031	TRACK NUMBER, CONTROLLING AGENCY OF TN REFERENCE -----	(CONTINUED)	
		00077	63	FOR C2 IUS (JU, PU, FJU, AND FPU). ILLEGAL.
		00100-00175	64 THROUGH 125	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU). RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		00176	126	COLLECTIVE ADDRESS.
		00177	127	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		00200-07776	128 THROUGH 4094	ILLEGAL.
		07777	4095	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		0A000-0Z777	4096 THROUGH 16383	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		10000-17777	16384 THROUGH 20479	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		20000-27777	32768 THROUGH 36863	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
				ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	031	TRACK NUMBER, CONTROLLING AGENCY OF TN REFERENCE -----	(CONTINUED)	
		40000-47777	65536 THROUGH 69631	REPORTING, E.G., TRACKS AND REFERENCE POINTS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		70000-77776	114688 THROUGH 118782	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: AMPLIFICATION CONTINUATION WORD 1

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25													
										:											:											:					
<---										:	SAM/SSM TYPE, 3										:	SAM/SSM TYPE, 2										:	SAM/SSM TYPE, 1				
										:	9										:	9										:	9				

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50
:																				
:																				
:	SPARE																			
:																				
:	22																			

WORD DESCRIPTION

WORD NUMBER: J6.0C1

WORD TITLE: AMPLIFICATION CONTINUATION WORD 1

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	00001
1762 002	THREAT TYPE	7-	10 4	
399 018	THREAT WEAPON	11-	15 5	
409 004	THREAT FUEL	16-	20 5	
1622 001	SAM/SSM TYPE, 1	21-	29 9	
1622 002	SAM/SSM TYPE, 2	30-	38 9	SAME CODING AS BITS 21-29
1622 003	SAM/SSM TYPE, 3	39-	47 9	SAME CODING AS BITS 21-29
756 022	SPARE	48-	69 22	

FIELD CODING FOR J6.0C1

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1762	002	THREAT TYPE -----		DESCRIBES THE TYPE OF THREAT ABOUT TO BE ENCOUNTERED BY THE FRIENDLY UNIT DESCRIBED IN THE ADDRESSEE TN OR TARGETED TN FIELD.
		NO STATEMENT	0	
		UNKNOWN	1	
		AIR-TO-SURFACE MISSILE	2	
		NUCLEAR, BIOLOGICAL, CHEMICAL	3	
		SURFACE-TO-SURFACE MISSILE	4	
		SURFACE-TO-AIR MISSILE	5	
		AIR-TO-AIR MISSILE	6	
		AIRCRAFT	7	
		ANTI-AIRCRAFT ARTILLERY	8	
		SHIP	9	
		SUBMARINE	10	
		SATELLITE	11	
		REMOTELY PILOTED VEHICLE/UNATTENDED	12	
		AIRBORNE VEHICLE		
		TORPEDO	13	
		ANTI-SHIP CRUISE MISSILE	14	
		UNDEFINED	15	
399	018	THREAT WEAPON -----		INDICATES THE TYPE OF WEAPON THE THREAT INTENDS TO USE AGAINST THE TARGETED TN.
		NO STATEMENT	0	
		HEAT AIR-TO-AIR MISSILE	1	
		RADAR AIR-TO-AIR MISSILE	2	
		ACTIVE AIR-TO-AIR MISSILE	3	A MISSILE NOT REQUIRING CONTINUAL DATA LINK WITH ITS LAUNCHING PLATFORM.
		ANTI-RADIATION MISSILE (HARM)	4	
		UNDEFINED	5 THROUGH 31	
409	004	THREAT FUEL -----		THE CURRENT KNOWN AMOUNT OF FUEL REMAINING IN THE THREAT.
		NO STATEMENT	0	
		.1 THROUGH 3 HOURS OF FUEL REMAINING	1 THROUGH 30	FUEL REMAINING IN .1 HOUR INCREMENTS.
		GREATER THAN 3 HOURS OF FUEL REMAINING	31	

5.1-1104

MIL-STD-6016B

FIELD CODING FOR J6.0C1

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1622	001	SAM/SSM TYPE, 1 -----		IDENTIFIES A TYPE OF SAM/SSM ON BOARD A SURFACE VESSEL.
		NO STATEMENT	0	
		SAM	1	
		SSM	2	
		HAWK	3	
		I-HAWK	4	
		PATRIOT	5	
		NIKE	6	
		REDEYE	7	
		STINKER	8	
		HELLFIRE	9	
		PERSHING	10	
		FIM-92 STINGER	11	
		NIM-23 HAWK	12	
		MIM-42 REDEYE	13	
		MIM-72 CHAPARRAL	14	
		MIM-104 PATRIOT	15	
		RIM-2 TERRIER	16	
		RIM-7 SEA SPARROW	17	
		RIM-8 TALOS	18	
		RIM-24 TARTAR	19	
		RIM-66 STANDARD MISSILE	20	
		RIM-67 STANDARD MISSILE	21	
		BLOWPIPE	22	
		UNDEFINED	23	
		SEA DART	24	
		SEA WOLF	25	
		CROTALE	26	
		RAPIER	27	
		UNDEFINED	28	
		SAM ROLAND	29	
		SA-2 GUIDELINE	30	
		SA-3 GOA	31	
		SA-4 GANEF	32	
		SA-N-3 GOBLET	33	
		SA-5 GAMMON	34	
		SA-N-4 GECKO	35	
		SA-6 GAINFUL	36	
		SA-N-6 GRUMBLE	37	
		SA-7 GRAIL	38	
		SA-8 GECKO	39	
		SA-9 GASKIN	40	
		SA-10 GRUMBLE	41	
		SA-11 GADFLY	42	

FIELD CODING FOR J6.0C1

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1622	001	SAM/SSM TYPE, 1	(CONTINUED)	

		SA-12	43	
		SA-13 GOPHER	44	
		MISTRAL	45	
		SA-N-7 GADFLY	46	
		SA-N-8 GREMLIN	47	
		SA-14 GREMLIN	48	
		SA-16 GIMLET	49	
		SA-X-17	50	
		SM-2 BLOCK II	51	
		SM-2 BLOCK III	52	
		SM-2 BLOCK IIIA	53	
		SM-2 BLOCK IIIB	54	
		SM-2 BLOCK IV	55	
		SM-2 BLOCK IVA	56	
		SM-3 LEAP	57	
		SA-N-5 GRAIL	58	
		SA-N-11 GRISOM	59	
		SA-12A GLADIATOR	60	
		SA-12B GIANT	61	
		UNDEFINED	62	
		SA-15 GAUNTLET	63	
		SA-17 GRIZZLY	64	
		SA-N-12 GRIZZLY	65	
		SA-18 GROUSE	66	
		SA-19 GRISOM	67	
		RIM-116 RAM	68	
		ADATS	69	
		JAVELIN	70	
		STARBURST	71	
		STARSTREAK	72	
		ASPIDE	73	
		FRONT DOOR	74	
		ROLAND II	75	
		AKASH	76	
		ANZA	77	
		ANZA II	78	
		CSA-1	79	
		CSA-2	80	
		CSA-4	81	
		CSA-5	82	
		FM-80	83	
		HN-5	84	
		NK-7	85	

FIELD CODING FOR J6.0C1

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1622	001	SAM/SSM TYPE, 1	(CONTINUED)	

		NK-16	86	
		PANTZYR	87	
		RAPIER 2000/JERNAS	88	
		RBS-90	89	
		SAKR	90	
		SAVA	91	
		SHANINE	92	
		SKYGUARD ASPIDE	93	
		SPADA	94	
		TAM SAM	95	
		TIGERCAT	96	
		VANGUARD	97	
		SA-N-1 GOA	98	
		SA-N-9 GAUNTLET	99	
		SA-N-10	100	
		ALBATROS/ASPIDE	101	
		SM-1	102	
		SA-2 IRAQ MOD	103	
		SA-2 NK RO	104	
		AEGIS-TI	105	
		MASURCA	106	
		SEA INDIGO	107	
		TANSAM	108	
		GUARDSMAN	109	
		SILKWORM	110	
		SNOW DRIFT 11/17	111	
		TUBE ARM SA-11	112	
		UNDEFINED	113	
		EYE SHIELD	114	
		SS-N-2	115	
		ELDORADO	116	
		FLYCATCHER	117	
		GEPARD	118	
		GIN SLING	119	
		SS-N-S SC00P PAIR	120	
		SGR-105 DA-01/00	121	
		RBS-70 (SLM)	122	
		ASTER 15	123	
		ASTER 30	124	
		EXOCET MM38	125	
		EXOCET MM40	126	
		BARAK I	127	
		RBS-15	128	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1622	001	SAM/SSM TYPE, 1	(CONTINUED)	

		OTOMAT MK I	129	
		OTOMAT MK II TESEO	130	
		HY 2	131	
		SS-N-3C SHADDOCK	132	
		SS-N-8 SAWFLY	133	
		SS-N-9 SIREN	134	
		SS-N-12 SANDBOX	135	
		SS-N-14 SILEX	136	
		SS-N-15 STARFISH	137	
		SS-N-16 STALLION	138	
		SS-N-18 STINGRAY	139	
		SS-N-19 SHIPWRECK	140	
		SS-N-20 STURGEON	141	
		SS-N-21 SAMPSON	142	
		SS-N-22 SUNBURN	143	
		SS-N-23 SKIFF	144	
		SS-N-24 SCORPION	145	
		SS-NX-25	146	
		SS-NX-26	147	
		SS-NX-28	148	
		PENGUIN MK II	149	
		GABRIEL I	150	
		RGM-84 HARPOON	151	
		BGM-109 TOMAHAWK	152	
		PAMS	153	
		HARPOON	154	
		TLAM	155	
		UNDEFINED	156 THROUGH 510	
		RESET TO NO STATEMENT	511	

TABLE J7-1. J7 Information Management Word Applicability Table

INITIAL WORD	SUBLABEL							
	J7.0I TRACK MANAGEMENT	J7.1I DATA UPDATE REQUEST	J7.2I CORRELATION	J7.3I POINTER	J7.4I TRACK IDENTIFIER	J7.5I IFF/SIF MANAGEMENT	J7.6I FILTER MANAGEMENT	J7.7I ASSOCIATION
EXTENSION WORD - 0	J7.0E0				J7.4E0		J7.6E0	
CONTINUATION WORD - 0								
1	J7.0C1 WORD 1	J7.1C1 ADDITIONAL ADDRESSES		J7.3C1 ADDITIONAL ADDRESSES			J7.6C1 FILTER MANAGEMENT WORD 1	
2				J7.3C2 CONTINUATION WORD 2			J7.6C2 FILTER MANAGEMENT WORD 2	
3				J7.3C3 CONTINUATION WORD 3			J7.6C3 FILTER MANAGEMENT WORD 3	
...								
...								
...								
...								
...								
31								

TABLE J7-2. Action Field Values

J7 MESSAGE	J7.0	J7.1	J7.2	J7.3	J7.4	J7.5	J7.6	J7.7
FIELD	ACTION, TRACK MANAGEMENT	ACTION, DATA UPDATE REQUEST	ACTION, CORRELATE	ACTION, POINTER	(NOT APPLICABLE)	ACTION, IFF/SIF MANAGEMENT	ACTION, FILTER MANAGEMENT	ACTION, ASSOCIATION
ACTION VALUE								
VALUE 0	DROP TRACK REPORT	DATA UPDATE REQUEST BY REQUEST INDICATOR	CORRELATE DATA	NO STATEMENT		CLEAR IFF/SIF	FILTER IMPLEMENTATION REQUEST	ASSOCIATE DATA
VALUE 1	DIFFERENCE REPORT	DATA UPDATE REQUEST BY TRACK NUMBER	UNDEFINED	WEAPONS		IFF/SIF DIFFERENCE REPORT	FILTER DESCRIPTION REPORT	TERMINATE ASSOCIATION
VALUE 2	CHANGE DATA ORDER	BALLISTIC MISSILE UPDATE REQUEST		TRACKING		IFF/SIF UPDATE REQUEST	DELETE FILTER REQUEST/ REPORT	UNDEFINED
VALUE 3	EMERGENCY STATUS CHANGE	UNDEFINED		ELECTRONIC WARFARE		SPECIAL CODE	UNDEFINED	
VALUE 4	FORCE TELL STATUS CHANGE			SPECIAL PROCESSING		UNDEFINED		
VALUE 5	STRENGTH CHANGE			UNDEFINED				
VALUE 6	EXERCISE STATUS ORDER							
VALUE 7	UNDEFINED							

J7.0 MESSAGE SUMMARY

The J7.0 Track Management Message is used to transmit information necessary to effect management actions on tracks being reported within the interface. Management actions include dropping tracks, reporting environment/category and identity conflicts, changing environment/category and identity, changing alert status, and changing strength.

J7.0I		J7.0E0 (Continued)	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	STRENGTH, TOTAL NUMBER OF	4
LABEL, J-SERIES	5	VEHICLES	
SUBLABEL, J-SERIES	3	STRENGTH, PERCENT OF TRACKED	4
MESSAGE LENGTH INDICATOR	3	VEHICLES	
EXERCISE INDICATOR	1	SPARE	60
ACTION, TRACK MANAGEMENT	3		
SPARE	1		
CONTROLLING UNIT INDICATOR	1		
TRACK NUMBER, REFERENCE	19		
STRENGTH(4)*****	4		
SPARE(4)*****			
ALERT STATUS CHANGE(1)*****	1		
SPARE(1)*****			
SPACE PLATFORM(6)*****			
AIR PLATFORM(6)	*		
SURFACE (MARITIME) PLATFORM(6)*	*		
SUBSURFACE (MARITIME)	*		
PLATFORM(6)	*		
LAND (GROUND) PLATFORM(6)	*		
SPARE(6)*****	6		
SPACE PLATFORM ACTIVITY(7)*****			
AIR PLATFORM ACTIVITY(7)	*		
SURFACE (MARITIME) PLATFORM	*		
ACTIVITY(7)	*		
SUBSURFACE (MARITIME) PLATFORM*	*		
ACTIVITY(7)	*		
LAND (GROUND) PLATFORM	*		
ACTIVITY(7)	*		
SPARE(7)*****	7		
SPARE	3		
ENVIRONMENT/CATEGORY(3)*****			
IDENTITY CONFIDENCE(4)	*		
IDENTITY(3)*****	*		
IDENTITY AMPLIFYING * 3	*		
DESCRIPTOR(3)*****	*		
SPECIAL INTEREST INDICATOR(1) *	11		
SPARE(11)*****			

J7.0E0	
DATA ELEMENT	# BITS
WORD FORMAT	2

MIL-STD-6016B

J7.0 TRANSMIT/RECEIVE RULES

TITLE: Track Management Message

TRANSMIT RULES

1. The J7.0 Track Management (ACT = 0) Drop Track Report message shall be:

a. Originated only by the unit with R^2 .

b. Transmitted one time.

2. The J7.0 Track Management (ACT = 1) Difference Report message shall be:

a. Originated only by units not having R^2 or by the controlling unit when an ID difference is received.

b. Transmitted one time when either manually or automatically generated.

c. Transmitted in accordance with the procedures described in paragraph 4.7.1.2 Difference Report and associated tables.

3. The J7.0 Track Management (ACT = 2) Change Data Order message shall be transmitted twice at an RRN = 10 (750 msecs, 500-1,000 msec interval).

4. The J7.0C1 Continuation Word 1 shall be included in the J7.0 (ACT = 1 or 2) message if any of the data elements in the J7.0C1 word are held.

5. The J7.0 Track Management (ACT = 3 or 4) Emergency or Force Tell Status Change message shall be:

a. Transmitted one time.

b. Originated by units not having R^2 when initiating a track alert.

c. Originated by all units, to terminate a Track Alert, except when terminating an emergency alert on itself.

MIL-STD-6016B

J7.0 TRANSMIT/RECEIVE RULES (Continued)

TRANSMIT RULES (Continued)

6. The J7.0 Track Management (ACT = 5) Strength Change message shall be transmitted one time by any unit without R² to change the Strength; Strength, Total Number of Vehicles; and/or Strength, Percent of Tracked Vehicles being reported.

7. The J7.0 Track Management (ACT = 6) Exercise Status Order message shall be transmitted one time by any unit to change the Identity of all exercise tracks to Friend.

RECEIVE RULES

The J7.0 (ACT = 1) message shall be processed upon receipt in accordance with paragraph 4.7.1.2 Difference Report and associated tables.

.....

WORD TITLE: TRACK MANAGEMENT INITIAL WORD

	24	23	22	21	20	19:	18:	17:	16	15	14:	13:	12	11	10:	09	08	07:	06	05	04	03	02:	01	00:		
<---							:	:	:	ACTION,	:EX	:	MESSAGE	:	SUBLABEL,	:							:	WORD	:		
							:CUI	:SP	:	TRACK	:IND	:	LENGTH	:	J-SERIES	:								:FORMAT	:		
							:	:	:MANAGEMENT	:		:	INDICATOR	:		:								:	:		
							:	1	:	1	:		3	:	1	:		3	:		3	:		5	:	2	:

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25				
<---: SPACE PLATFORM						:ALT:		STRENGTH																				
						:CHN:																						
<---: AIR PLATFORM						:---:																						
<---: SURFACE (MARITIME)						:																						
: PLATFORM						:																						
						:						TRACK NUMBER, REFERENCE																
<---: SUBSURFACE (MARITIME)						:		SPARE																				
: PLATFORM						:SP:																						
<---: LAND (GROUND) PLATFORM						:																						
						:																						
<---: SPARE						:																						
<---:						:																						
:						6		: 1 :		4				:														
																			19									

WORD MAP

WORD NUMBER: J7.0I

WORD TITLE: TRACK MANAGEMENT INITIAL WORD

: 69 68 67 66 65 64 63 62 61 60 59:											58 57 56:	55 54 53 52 51 50
:SI : IDENTITY :											:	:SPACE PLATFORM ACTIVITY
:IND:											:	:
: : ID AMP :											:	: AIR PLATFORM ACTIVITY
: : DESCR :											:	: SURFACE (MARITIME)
:											:	: PLATFORM ACTIVITY
:											SPARE	:
:											:	: SUBSURFACE (MARITIME)
:											:	: PLATFORM ACTIVITY
:											:	: LAND (GROUND) PLATFORM
:											:	: ACTIVITY
:											:	: SPARE
:											:	:
: 11											: 3	: 7
:											:	:

WORD DESCRIPTION

WORD NUMBER: J7.0I

WORD TITLE: TRACK MANAGEMENT INITIAL WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	00
270	004	LABEL, J-SERIES	2-	6 5	00111
271	005	SUBLABEL, J-SERIES	7-	9 3	000
800	001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
385	003	EXERCISE INDICATOR (EX IND)	13	1	
1606	001	ACTION, TRACK MANAGEMENT (ACT)	14-	16 3	
756	001	SPARE (SP)	17	1	
1750	001	CONTROLLING UNIT INDICATOR (CUI)	18	1	
769	002	TRACK NUMBER, REFERENCE	19-	37 19	
386	013	STRENGTH	38-	41 4	
756	004	SPARE	38-	41 4	
1751	001	ALERT STATUS CHANGE (ALT CHN)	42	1	
756	001	SPARE (SP)	42	1	
1797	005	SPACE PLATFORM	43-	48 6	SEE NOTE 1.
1797	001	AIR PLATFORM	43-	48 6	SEE NOTE 1.
1797	002	SURFACE (MARITIME) PLATFORM	43-	48 6	SEE NOTE 1.
1797	003	SUBSURFACE (MARITIME) PLATFORM	43-	48 6	SEE NOTE 1.
1797	004	LAND (GROUND) PLATFORM	43-	48 6	SEE NOTE 1.
756	006	SPARE	43-	48 6	
1798	005	SPACE PLATFORM ACTIVITY	49-	55 7	SEE NOTE 2.
1798	001	AIR PLATFORM ACTIVITY	49-	55 7	SEE NOTE 2.
1798	002	SURFACE (MARITIME) PLATFORM ACTIVITY	49-	55 7	SEE NOTE 2.
1798	003	SUBSURFACE (MARITIME) PLATFORM ACTIVITY	49-	55 7	SEE NOTE 2.
1798	004	LAND (GROUND) PLATFORM ACTIVITY	49-	55 7	SEE NOTE 2.
756	007	SPARE	49-	55 7	
756	003	SPARE	56-	58 3	
275	004	ENVIRONMENT/CATEGORY (ENV/CAT)	59-	61 3	SEE NOTES 1 AND 2.
1663	001	IDENTITY CONFIDENCE (ID CON)	62-	65 4	
376	007	IDENTITY	66-	68 3	
376	001	IDENTITY AMPLIFYING DESCRIPTOR (ID AMP DESCR)	66-	68 3	
1861	001	SPECIAL INTEREST INDICATOR (SI IND)	69	1	

WORD DESCRIPTION

WORD NUMBER: J7.0I

WORD TITLE: TRACK MANAGEMENT INITIAL WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
756	011 SPARE	59-	69	11

J7.0I WORD NOTES
NOTE 1 Environment/Category - Platform (Sheet 1 of 5)

PLATFORM	ENVIRONMENT/CATEGORY						
	0	1	2	3	4	5	6-7
	NO STATEMENT/ UNKNOWN	SPACE	AIR	SURFACE (MARITIME)	SUBSURFACE (MARITIME)	LAND (GROUND)	UNDEFINED
0	NO STATEMENT	NO STATEMENT	NO STATEMENT	NO STATEMENT	NO STATEMENT	NO STATEMENT	UNDEFINED
1	ILLEGAL	SATELLITE	FIGHTER	AIRCRAFT CARRIER (CV)	SUBMARINE PROPULSION UNKNOWN	TROOP CONCENTRATION/UNIT	UNDEFINED
2	ILLEGAL	BASE	FIGHTER BOMBER	BATTLESHIP	DIESEL ELECTRIC SUBMARINE GENERAL	HEADQUARTER COMPLEX	UNDEFINED
3	ILLEGAL	WEAPON	ATTACK	CRUISER	DIESEL ELECTRIC ATTACK SUBMARINE	COMMAND/CONTROL COMMAND AND CONTROL CENTER	UNDEFINED
4	ILLEGAL	TRANSPORT	BOMBER	DESTROYER	DIESEL ELECTRIC MISSILE SUBMARINE	ASSEMBLY AREA	UNDEFINED
5	ILLEGAL	PATROL	RECONNAISSANCE	FRIGATE	DIESEL ELECTRIC BALLISTIC MISSILE SUBMARINE	INSTALLATION/FACILITY, MILITARY	UNDEFINED
6	ILLEGAL	SUPPORT	TANKER	FAST PATROL BOAT	TYPE 1 DIESEL	INSTALLATION/FACILITY, CIVILIAN	UNDEFINED
7	ILLEGAL	DEBRIS	TANKER (BOOM ONLY)	AMPHIBIOUS	TYPE 2 DIESEL	AIRFIELD/AIRBASE	UNDEFINED
8	ILLEGAL	DECOY	TANKER (DROGUE ONLY)	LHA/LHD	TYPE 3 DIESEL	PORT/HARBOR FACILITY	UNDEFINED
9	ILLEGAL	UNDEFINED	INTERCEPTOR	AMPHIBIOUS ASSAULT COMMAND SHIP (LCC)	NUCLEAR SUBMARINE GENERAL	STORAGE SITE	UNDEFINED
10	ILLEGAL	UNDEFINED	TRANSPORT	LANDING CRAFT (LC)	NUCLEAR ATTACK SUBMARINE	TACTICAL POSITION	UNDEFINED

5.2-10

MIL-STD-6016B

J7.0I WORD NOTES (Continued)
NOTE 1 Environment/Category - Platform (Sheet 2 of 5)

PLATFORM	ENVIRONMENT/CATEGORY						
	0	1	2	3	4	5	6-7
	NO STATEMENT/ UNKNOWN	SPACE	AIR	SURFACE (MARITIME)	SUBSURFACE (MARITIME)	LAND (GROUND)	UNDEFINED
11	ILLEGAL	UNDEFINED	AIRBORNE COMMAND POST (ACP)	TROOP SHIP	NUCLEAR MISSILE SUBMARINE	FORTIFICATION	UNDEFINED
12	ILLEGAL	UNDEFINED	MISSILE CARRIER	TANKER/OILER	NUCLEAR BALLISTIC MISSILE SUBMARINE	INTERSECTION	UNDEFINED
13	ILLEGAL	UNDEFINED	MISSILE	AUXILIARY SHIP	TYPE I NUCLEAR	CONVOY	UNDEFINED
14	ILLEGAL	UNDEFINED	ELECTRONIC WARFARE (EW)	MINE WARFARE SHIP	TYPE II NUCLEAR	COMBAT VEHICLE	UNDEFINED
15	ILLEGAL	UNDEFINED	ANTISUBMARINE WARFARE (ASW)	MINE COUNTERMEASURES MARITIME VESSEL (MCMV)	TYPE III NUCLEAR	COMBAT SUPPORT VEHICLE	UNDEFINED
16	ILLEGAL	UNDEFINED	AIRBORNE EARLY WARNING AND CONTROL (AEW&C)	HOSPITAL SHIP	TYPE IV NUCLEAR	VEHICLE, OTHER	UNDEFINED
17	ILLEGAL	UNDEFINED	MARITIME PATROL AIRCRAFT (MPA)	SURFACED SUBMARINE	TYPE V NUCLEAR	TANK	UNDEFINED
18	ILLEGAL	UNDEFINED	SEARCH AND RESCUE (SAR)	HYDROFOIL	NON-SUBMARINE	TRAIN	UNDEFINED
19	ILLEGAL	UNDEFINED	DRONE	AIR CUSHION VEHICLE	SURFACE VESSEL	REMOTELY PILOTED VEHICLE	UNDEFINED
20	ILLEGAL	UNDEFINED	REMOTELY PILOTED VEHICLE (RPV)	INTELLIGENCE COLLECTOR	TORPEDO	MORTAR	UNDEFINED
21	ILLEGAL	UNDEFINED	FIXED WING GUNSHIP	SURVEY VESSEL	MINE	FIELD ARTILLERY	UNDEFINED
22	ILLEGAL	UNDEFINED	CIVIL, AIRLINER	NON-MILITARY	DECOY	AIR DEFENSE ARTILLERY	UNDEFINED
23	ILLEGAL	UNDEFINED	CIVIL, GENERAL	LANDING PLATFORM	WRECK	ROCKET LAUNCHER	UNDEFINED

5.2-11

MIL-STD-6016B

J7.0I WORD NOTES (Continued)
NOTE 1 Environment/Category - Platform (Sheet 3 of 5)

PLATFORM	ENVIRONMENT/CATEGORY						
	0	1	2	3	4	5	6-7
	NO STATEMENT/ UNKNOWN	SPACE	AIR	SURFACE (MARITIME)	SUBSURFACE (MARITIME)	LAND (GROUND)	UNDEFINED
24	ILLEGAL	UNDEFINED	LIGHTER THAN AIR (LTA)	LANDING SHIP	SEABED PIPELINE	MISSILE LAUNCHER	UNDEFINED
25	ILLEGAL	UNDEFINED	GLIDER	COMMAND	FISH/MARINE LIFE	SPECIAL WEAPON	UNDEFINED
26	ILLEGAL	UNDEFINED	DECOY	OCEAN RESEARCH	SWIMMER/FROGMAN	BRIDGE	UNDEFINED
27	ILLEGAL	UNDEFINED	HELICOPTER (HELO)	PATROL	KNUCKLE/WAKE	BUILDING/STRUCTURE	UNDEFINED
28	ILLEGAL	UNDEFINED	ATTACK HELICOPTER	SUPPORT	ATTACK SUBMARINE	POWER FACILITY	UNDEFINED
29	ILLEGAL	UNDEFINED	HELICOPTER GUNSHIP	FISHING VESSEL	CRUISE MISSILE LAUNCHER	RAIL FACILITY	UNDEFINED
30	ILLEGAL	UNDEFINED	ANTISUBMARINE WARFARE HELICOPTER (ASW HELO)	MERCHANT VESSEL	PINNACLE/SEA MOUNTAIN	TERRAIN	UNDEFINED
31	ILLEGAL	SPACE GENERAL	MINE WARFARE HELICOPTER	PATROL CRAFT ESCORT	NON-MILITARY SUBMERSIBLE	NAVAID SITE	UNDEFINED
32	ILLEGAL	UNDEFINED	TRANSPORT HELICOPTER	AMPHIBIOUS GENERAL ASSAULT	UNDEFINED	COMMUNICATION SITE	UNDEFINED
33	ILLEGAL	UNDEFINED	TACTICAL SUPPORT	MISSILE CONTROL UNIT	TYPE VI NUCLEAR	RADAR SITE	UNDEFINED
34	ILLEGAL	UNDEFINED	PATROL	DECOY	TYPE VII NUCLEAR	ANTENNA/EMITTER	UNDEFINED
35	ILLEGAL	UNDEFINED	MISCELLANEOUS FIXED WING	UNDEFINED	CONVENTIONAL (COMMAND AND CONTROL)	BUFFER CENTER	UNDEFINED
36	ILLEGAL	UNDEFINED	MISSILE CONTROL UNIT	UNDEFINED	CONVENTIONAL (AUXILIARY)	ELECTRONIC WARFARE SITE	UNDEFINED

5.2-12

MIL-STD-6016B

J7.0I WORD NOTES (Continued)
NOTE 1 Environment/Category - Platform (Sheet 4 of 5)

PLATFORM	ENVIRONMENT/CATEGORY						
	0	1	2	3	4	5	6-7
	NO STATEMENT/ UNKNOWN	SPACE	AIR	SURFACE (MARITIME)	SUBSURFACE (MARITIME)	LAND (GROUND)	UNDEFINED
37	ILLEGAL	UNDEFINED	SURFACE-TO-AIR MISSILE (SAM)	UNDEFINED	NUCLEAR (COMMAND AND CONTROL)	SURVEILLANCE SITE	UNDEFINED
38	ILLEGAL	UNDEFINED	AIR-TO-SURFACE MISSILE (ASM)	UNDEFINED	UNDEFINED	BRIDGING EQUIPMENT	UNDEFINED
39	ILLEGAL	UNDEFINED	SURFACE-TO-SURFACE MISSILE (SSM)	UNDEFINED	UNDEFINED	MINE WARFARE EQUIPMENT	UNDEFINED
40	ILLEGAL	UNDEFINED	LOGISTIC	UNDEFINED	UNDEFINED	SURFACE-TO-AIR MISSILE (SAM) SITE	UNDEFINED
41	ILLEGAL	UNDEFINED	AIR-TO-AIR MISSILE (AAM)	UNDEFINED	UNDEFINED	MARITIME HEADQUARTERS	UNDEFINED
42	ILLEGAL	UNDEFINED	SUBSURFACE-TO-SURFACE MISSILE	UNDEFINED	UNDEFINED	AIR SUPPORT RADAR TEAM (ASRT)	UNDEFINED
43	ILLEGAL	UNDEFINED	SURFACE-TO-SUBSURFACE MISSILE	UNDEFINED	UNDEFINED	DIRECT AIR SUPPORT CENTER (DASC)	UNDEFINED
44	ILLEGAL	UNDEFINED	CRUISE MISSILE	UNDEFINED	UNDEFINED	FORWARD AIR CONTROL PARTY (FACP)	UNDEFINED
45	ILLEGAL	UNDEFINED	BALLISTIC MISSILE	UNDEFINED	UNDEFINED	TACTICAL OPERATIONS CENTER (TOC)	UNDEFINED
46	ILLEGAL	UNDEFINED	AIRBORNE LAND SURVEILLANCE	UNDEFINED	UNDEFINED	TACTICAL DATA SYSTEMS (TDS)	UNDEFINED
47	ILLEGAL	UNDEFINED	AIRBORNE LASER	UNDEFINED	UNDEFINED	DECOY	UNDEFINED

5.2-13

MIL-STD-6016B

J7.0I WORD NOTES (Continued)
NOTE 1 Environment/Category - Platform (Sheet 5 of 5)

PLATFORM	ENVIRONMENT/CATEGORY						
	0	1	2	3	4	5	6-7
	NO STATEMENT/ UNKNOWN	SPACE	AIR	SURFACE (MARITIME)	SUBSURFACE (MARITIME)	LAND (GROUND)	UNDEFINED
48	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	TRACKED VEHICLE	UNDEFINED
49	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	MISSILE CONTROL UNIT	THEATER HIGH ALTITUDE AREA DEFENSE (THAAD)	UNDEFINED
50	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	JOINT TACTICAL GROUND STATION (JTAGS)	UNDEFINED
51	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	ARMOR	UNDEFINED
52	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	CAVALRY	UNDEFINED
53	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	ENGINEER	UNDEFINED
54	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	AIRBORNE/SPECIAL OPERATIONS	UNDEFINED
55	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	AVIATION	UNDEFINED
56	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	AIR DEFENSE SITE	UNDEFINED
57	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	BALLISTIC MISSILE DEFENSE SITE	UNDEFINED
58 • • • 61	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
62	ILLEGAL	BALLISTIC MISSILE GENERAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
63	ILLEGAL	RESET TO NO STATEMENT	RESET TO NO STATEMENT	RESET TO NO STATEMENT	RESET TO NO STATEMENT	RESET TO NO STATEMENT	UNDEFINED

5.2-14

MIL-STD-6016B

J7.0I WORD NOTES (Continued)
NOTE 2 Environment/Category - Platform Activity (Sheet 1 of 4)

PLATFORM ACTIVITY	E N V I R O N M E N T / C A T E G O R Y						
	0	1	2	3	4	5	6-7
	NO STATEMENT/ UNKNOWN	SPACE	AIR	SURFACE (MARITIME)	SUBSURFACE (MARITIME)	LAND (GROUND)	UNDEFINED
0	NO STATEMENT	NO STATEMENT	NO STATEMENT	NO STATEMENT	NO STATEMENT	NO STATEMENT	UNDEFINED
1	ILLEGAL	RECONNAISSANCE	RECONNAISSANCE	AIR WARFARE SUPPORT	RECONNAISSANCE	HOLDING	UNDEFINED
2	ILLEGAL	ANTISPACE WARFARE	OVER THE HORIZON TARGETING (OTHT)	OVER THE HORIZON TARGETING (OTHT)	OVER THE HORIZON TARGETING (OTHT)	DELAYING	UNDEFINED
3	ILLEGAL	TELEVISION	TRAINING	TRAINING	TRAINING	MOVING	UNDEFINED
4	ILLEGAL	LOGISTICS	LOGISTICS SUPPORT	LOGISTICS SUPPORT	DIVING	DETECTING	UNDEFINED
5	ILLEGAL	ANTISURFACE WARFARE	ANTISURFACE WARFARE	ANTISURFACE WARFARE	ANTISURFACE WARFARE	ACQUIRING	UNDEFINED
6	ILLEGAL	ELECTRONIC WARFARE (EW)	ELECTRONIC WARFARE (EW)	ELECTRONIC WARFARE (EW)	ELECTRONIC WARFARE (EW)	ENGAGING	UNDEFINED
7	ILLEGAL	SURVEILLANCE	SURVEILLANCE	FISHERY PROTECTION	SURVEILLANCE	ADVANCING	UNDEFINED
8	ILLEGAL	DATA LINK	SEARCH AND RESCUE (SAR)	SEARCH AND RESCUE (SAR)	SEARCH AND RESCUE (SAR)	ANTIAIR ATTACK	UNDEFINED
9	ILLEGAL	ELECTRONIC WARFARE SUPPORT (ES)	ESCORTING	ESCORTING	ESCORTING	AMPHIBIOUS ATTACK	UNDEFINED
10	ILLEGAL	ELECTRONIC ATTACK (EA)	MINELAYING	MINELAYING	MINELAYING	FIRING/LAUNCHING	UNDEFINED
11	ILLEGAL	COMMUNICATIONS	TRANSITING	TRANSITING	TRANSITING	CONVENTIONAL ATTACK ASSAULT	UNDEFINED
12	ILLEGAL	RETURN TO BASE (RTB)	SPECIAL WEAPONS ATTACK	NAVAL GUNFIRE SUPPORT	SPECIAL WEAPONS ATTACK	SPECIAL WEAPONS ATTACK	UNDEFINED
13	ILLEGAL	UNDEFINED	INTRUDING	INTRUDING	SURFACING	DEMOLITION	UNDEFINED
14	ILLEGAL	UNDEFINED	ELECTRONIC WARFARE SUPPORT (ES)	AMPHIBIOUS WARFARE	AMPHIBIOUS WARFARE	OVER THE HORIZON TARGETING (OTHT)	UNDEFINED
15	ILLEGAL	UNDEFINED	COMMUNICATIONS RELAY	INTELLIGENCE COLLECTING	INTELLIGENCE COLLECTING	TRANSITING	UNDEFINED
16	ILLEGAL	UNDEFINED	PATROL (OCEAN SURVEILLANCE)	PATROL	PATROL	RETURN TO BASE	UNDEFINED
17	ILLEGAL	UNDEFINED	AIRLIFT (TRANSPORT)	TRANSPORT	TRANSPORT	DEPLOYING	UNDEFINED
18	ILLEGAL	UNDEFINED	ANTISUBMARINE WARFARE (ASW)	ANTISUBMARINE WARFARE (ASW)	ANTISUBMARINE WARFARE (ASW)	EMISSION CONTROL (EMCON)	UNDEFINED
19	ILLEGAL	UNDEFINED	SHADOWING/INTERVENING	SHADOWING/INTERVENING	SHADOWING/INTERVENING	RIVER CROSSING	UNDEFINED
20	ILLEGAL	UNDEFINED	TOWING	TOWING	BOTTOMING	LOADING	UNDEFINED
21	ILLEGAL	UNDEFINED	AIR ASSAULT	SPECIAL WARFARE	SPECIAL WARFARE	TOWING	UNDEFINED
22	ILLEGAL	UNDEFINED	INTERCEPTION	STRIKE WARFARE	STIKE WARFARE	BUILDING FORTIFICATION BARRIER	UNDEFINED
23	ILLEGAL	UNDEFINED	ELECTRONIC ATTACK (EA)	ANTIAIR WARFARE	CLANDESTINE OPERATIONS	CLEARING BARRIER	UNDEFINED

5.2-15

MIL-STD-6016B

J7.0I WORD NOTES (Continued)
NOTE 2 Environment/Category - Platform Activity (Sheet 2 of 4)

PLATFORM ACTIVITY	E N V I R O N M E N T / C A T E G O R Y						
	0	1	2	3	4	5	6-7
	NO STATEMENT/ UNKNOWN	SPACE	AIR	SURFACE (MARITIME)	SUBSURFACE (MARITIME)	LAND (GROUND)	UNDEFINED
24	ILLEGAL	UNDEFINED	POLICING	FISHING	SNORKELING	RECOVERING EQUIPMENT	UNDEFINED
25	ILLEGAL	UNDEFINED	CONVENTIONAL ATTACK	PICKETING	CONVENTIONAL ATTACK	MINE SWEEPING	UNDEFINED
26	ILLEGAL	UNDEFINED	MEDICAL EVACUATION (MEDEVAC)	MINE COUNTERMEASURES	MINE COUNTERMEASURES	MINE LAYING	UNDEFINED
27	ILLEGAL	UNDEFINED	MINE COUNTERMEASURES	MINE WARFARE	MINE WARFARE	JAMMING	UNDEFINED
28	ILLEGAL	UNDEFINED	SEARCH	MARKING	MARKING	RECONNAISSANCE PATROLLING	UNDEFINED
29	ILLEGAL	UNDEFINED	REFUELING/TANKING	NONCOMBATANT OPERATIONS	NONCOMBATANT OPERATIONS	SEARCH AND RESCUE (SAR)	UNDEFINED
30	ILLEGAL	UNDEFINED	INTERDICTION	UNDERWAY REPLENISHMENT	DIRECT SUPPORT	TRAINING	UNDEFINED
31	ILLEGAL	UNDEFINED	COMBAT AIR PATROL (CAP)	SURVEYING	VIDEO DATA LINKING (TARGETING)	MEDICAL EVACUATION (MEDEVAC)	UNDEFINED
32	ILLEGAL	UNDEFINED	FORWARD AIR CONTROLLER (FAC)	ELECTRONIC WARFARE SUPPORT (ES)	UNDEFINED	ESCORTING	UNDEFINED
33	ILLEGAL	UNDEFINED	VERY IMPORTANT PERSON (VIP) FLIGHT	ELECTRONIC ATTACK (EA)	UNDEFINED	TRANSPORTING	UNDEFINED
34	ILLEGAL	UNDEFINED	NONCOMBATANT OPERATIONS	FLIGHT OPERATIONS	UNDEFINED	SCREENING	UNDEFINED
35	ILLEGAL	UNDEFINED	CLOSE AIR SUPPORT (CAS)	VIDEO DATA LINKING (TARGETING)	UNDEFINED	SUPPORTING	UNDEFINED
36	ILLEGAL	UNDEFINED	AIRBORNE EARLY WARNING (AEW)	PLANE GUARD	UNDEFINED	REPAIRING	UNDEFINED
37	ILLEGAL	UNDEFINED	GROUND ATTACK TACTICS (GAT)	RESCUE SHIP/LIFEGUARD	UNDEFINED	REFUELING	UNDEFINED
38	ILLEGAL	UNDEFINED	AIRBORNE COMMAND POST (ACP)	UNDEFINED	UNDEFINED	NEUTRALIZING	UNDEFINED
39	ILLEGAL	UNDEFINED	RESCUE COMBAT AIR PATROL (RESCAP)	UNDEFINED	UNDEFINED	TARGETING	UNDEFINED
40	ILLEGAL	UNDEFINED	SURFACE COMBAT AIR PATROL (SUCAP)	UNDEFINED	UNDEFINED	BYPASSING	UNDEFINED
41	ILLEGAL	UNDEFINED	TANKING	UNDEFINED	UNDEFINED	CLOSING	UNDEFINED
42	ILLEGAL	UNDEFINED	SPOTTING	UNDEFINED	UNDEFINED	CONCENTRATING	UNDEFINED
43	ILLEGAL	UNDEFINED	STRIKE WARFARE	UNDEFINED	UNDEFINED	DEFENDING	UNDEFINED
44	ILLEGAL	UNDEFINED	SPECIAL	UNDEFINED	UNDEFINED	DISENGAGING	UNDEFINED
45	ILLEGAL	UNDEFINED	HIJACK	UNDEFINED	UNDEFINED	INFILTRATING	UNDEFINED
46	ILLEGAL	UNDEFINED	JAMMER	UNDEFINED	UNDEFINED	INTERDICTING	UNDEFINED

5.2-16

MIL-STD-6016B

J7.0I WORD NOTES (Continued)
NOTE 2 Environment/Category - Platform Activity (Sheet 3 of 4)

PLATFORM ACTIVITY	E N V I R O N M E N T / C A T E G O R Y						
	0 NO STATEMENT/ UNKNOWN	1 SPACE	2 AIR	3 SURFACE (MARITIME)	4 SUBSURFACE (MARITIME)	5 LAND (GROUND)	6-7 UNDEFINED
47	ILLEGAL	UNDEFINED	TROOPLIFT	UNDEFINED	UNDEFINED	LANDING	UNDEFINED
48	ILLEGAL	UNDEFINED	XRAY	UNDEFINED	UNDEFINED	OCCUPYING	UNDEFINED
49	ILLEGAL	UNDEFINED	ANTIAIR WARFARE (AAW)	UNDEFINED	UNDEFINED	DISPERSING	UNDEFINED
50	ILLEGAL	UNDEFINED	COMMAND AND CONTROL	RETURN TO BASE (RTB)	RETURN TO BASE (RTB)	SUPPLY/RESUPPLY	UNDEFINED
51	ILLEGAL	SPACE ACTIVITY 1	COUNTER-AIR-WARFARE	UNDEFINED	UNDEFINED	RETROGRADE WITHDRAWING	UNDEFINED
52	ILLEGAL	SPACE ACTIVITY 2	RETURN TO BASE (RTB)	UNDEFINED	UNDEFINED	TRANSMITTING	UNDEFINED
53	ILLEGAL	SPACE ACTIVITY 3	MINE WARFARE	UNDEFINED	UNDEFINED	ELECTRONIC WARFARE SUPPORT (ES)	UNDEFINED
54	ILLEGAL	SPACE ACTIVITY 4	CHAFF LAYING	UNDEFINED	UNDEFINED	ELECTRONIC ATTACK (EA)	UNDEFINED
55	ILLEGAL	SPACE ACTIVITY 5	VIDEO DATA LINKING (TARGETING)	UNDEFINED	UNDEFINED	MOVING EQUIPMENT	UNDEFINED
56	ILLEGAL	SPACE ACTIVITY 6	DIPPING	UNDEFINED	UNDEFINED	POWER UP AND MANNED, NOT EMITTING	UNDEFINED
57	ILLEGAL	SPACE ACTIVITY 7	RESCUE HELO	UNDEFINED	UNDEFINED	PREPARATION FOR LAUNCH	UNDEFINED
58	ILLEGAL	SPACE ACTIVITY 8	ORBITING	UNDEFINED	UNDEFINED	SITE SHUT DOWN TO UNPOWERED SATUS	UNDEFINED
59	ILLEGAL	SPACE ACTIVITY 9	UNDER RECALL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
60	ILLEGAL	SPACE ACTIVITY 10	ENGAGING	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
61	ILLEGAL	SPACE ACTIVITY 11	ENGAGING (PRIORITY KILL)	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
62	ILLEGAL	SPACE ACTIVITY 12	INVESTIGATING	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
63	ILLEGAL	UNDEFINED	CLEARED TO DROP	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
64	ILLEGAL	UNDEFINED	INTERVENING	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
65	ILLEGAL	UNDEFINED	DIVERTING	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
66	ILLEGAL	UNDEFINED	AIR-TO-GROUND	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
67	ILLEGAL	UNDEFINED	AIR-TO-AIR	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
68	ILLEGAL	UNDEFINED	PRECISION BOMBING	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
69	ILLEGAL	UNDEFINED	LASER DESIGNATION	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED

5.2-17

MIL-STD-6016B

J7.0I WORD NOTES (Continued)
NOTE 2 Environment/Category - Platform Activity (Sheet 4 of 4)

PLATFORM ACTIVITY	E N V I R O N M E N T / C A T E G O R Y						
	0	1	2	3	4	5	6-7
	NO STATEMENT/ UNKNOWN	SPACE	AIR	SURFACE (MARITIME)	SUBSURFACE (MARITIME)	LAND (GROUND)	UNDEFINED
70	ILLEGAL	UNDEFINED	BEACON BOMBING	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
71	ILLEGAL	UNDEFINED	SHADOWING	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
72	ILLEGAL	UNDEFINED	COVERING	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
73	ILLEGAL	UNDEFINED	VISUAL IDENTIFICATION	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
74	ILLEGAL	UNDEFINED	HIGH ENERGY LASING	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
75 • • 114	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
115	ILLEGAL	BALLISTIC MISSILE ACTIVITY 1	AIR ACTIVITY 1	SURFACE (MARITIME) ACTIVITY 1	SUBSURFACE (MARITIME) ACTIVITY 1	LAND (GROUND) ACTIVITY 1	UNDEFINED
116	ILLEGAL	BALLISTIC MISSILE ACTIVITY 2	AIR ACTIVITY 2	SURFACE (MARITIME) ACTIVITY 2	SUBSURFACE (MARITIME) ACTIVITY 2	LAND (GROUND) ACTIVITY 2	UNDEFINED
117	ILLEGAL	BALLISTIC MISSILE ACTIVITY 3	AIR ACTIVITY 3	SURFACE (MARITIME) ACTIVITY 3	SUBSURFACE (MARITIME) ACTIVITY 3	LAND (GROUND) ACTIVITY 3	UNDEFINED
118	ILLEGAL	BALLISTIC MISSILE ACTIVITY 4	AIR ACTIVITY 4	SURFACE (MARITIME) ACTIVITY 4	SUBSURFACE (MARITIME) ACTIVITY 4	LAND (GROUND) ACTIVITY 4	UNDEFINED
119	ILLEGAL	BALLISTIC MISSILE ACTIVITY 5	AIR ACTIVITY 5	SURFACE (MARITIME) ACTIVITY 5	SUBSURFACE (MARITIME) ACTIVITY 5	LAND (GROUND) ACTIVITY 5	UNDEFINED
120	ILLEGAL	BALLISTIC MISSILE ACTIVITY 6	AIR ACTIVITY 6	SURFACE (MARITIME) ACTIVITY 6	SUBSURFACE (MARITIME) ACTIVITY 6	LAND (GROUND) ACTIVITY 6	UNDEFINED
121	ILLEGAL	BALLISTIC MISSILE ACTIVITY 7	AIR ACTIVITY 7	SURFACE (MARITIME) ACTIVITY 7	SUBSURFACE (MARITIME) ACTIVITY 7	LAND (GROUND) ACTIVITY 7	UNDEFINED
122	ILLEGAL	BALLISTIC MISSILE ACTIVITY 8	AIR ACTIVITY 8	SURFACE (MARITIME) ACTIVITY 8	SUBSURFACE (MARITIME) ACTIVITY 8	LAND (GROUND) ACTIVITY 8	UNDEFINED
123	ILLEGAL	BALLISTIC MISSILE ACTIVITY 9	AIR ACTIVITY 9	SURFACE (MARITIME) ACTIVITY 9	SUBSURFACE (MARITIME) ACTIVITY 9	LAND (GROUND) ACTIVITY 9	UNDEFINED
124	ILLEGAL	BALLISTIC MISSILE ACTIVITY 10	AIR ACTIVITY 10	SURFACE (MARITIME) ACTIVITY 10	SUBSURFACE (MARITIME) ACTIVITY 10	LAND (GROUND) ACTIVITY 10	UNDEFINED
125	ILLEGAL	BALLISTIC MISSILE ACTIVITY 11	AIR ACTIVITY 11	SURFACE (MARITIME) ACTIVITY 11	SUBSURFACE (MARITIME) ACTIVITY 11	LAND (GROUND) ACTIVITY 11	UNDEFINED
126	ILLEGAL	BALLISTIC MISSILE ACTIVITY 12	AIR ACTIVITY 12	SURFACE (MARITIME) ACTIVITY 12	SUBSURFACE (MARITIME) ACTIVITY 12	LAND (GROUND) ACTIVITY 12	UNDEFINED
127	ILLEGAL	RESET TO NO STATEMENT	RESET TO NO STATEMENT	RESET TO NO STATEMENT	RESET TO NO STATEMENT	RESET TO NO STATEMENT	UNDEFINED

5.2-18

MIL-STD-6016B

FIELD CODING FOR J7.0I

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
385	003	EXERCISE INDICATOR -----		INDICATES WHETHER OR NOT THE MESSAGE IDENTIFIES AN EXERCISE TRACK.
		NON-EXERCISE TRACK	0	
		EXERCISE TRACK OR UNIT	1	
1606	001	ACTION, TRACK MANAGEMENT -----		DESCRIBES THE TRACK MANAGEMENT ACTION TO BE ACCOMPLISHED WHEN A TRACK MANAGEMENT MESSAGE IS EXCHANGED ON THE INTERFACE.
		DROP TRACK REPORT	0	THE UNIT SPECIFIED IN THE SOURCE TN. CEASED REPORTING THE REFERENCE TN.
		DIFFERENCE REPORT	1	THE UNIT SPECIFIED IN THE SOURCE TN HAS INFORMATION ON A TRACK, I.E., ENVIRONMENT/CATEGORY, IDENTITY, EXERCISE INDICATOR AND/OR SPECIAL INTEREST INDICATOR, WHICH IS DIFFERENT FROM THAT BEING REPORTED ON THE TRACK SPECIFIED IN THE REFERENCE TN. THE ENVIRONMENT/ CATEGORY, IDENTITY, AND SPECIAL INTEREST INDICATOR MUST BE SET TO THE UNIT'S LOCAL DATA VALUES. REFER TO THE ENVIRONMENT/CATEGORY DIFFERENCE RESOLUTION TABLE.
		CHANGE DATA ORDER	2	THE UNIT SPECIFIED IN THE SOURCE TN DIRECTS THAT THE ENVIRONMENT/ CATEGORY, IDENTITY, EXERCISE INDICATOR AND SPECIAL INTEREST INDICATOR ON THE TRACK SPECIFIED IN THE REFERENCE TN BE CHANGED TO THAT SPECIFIED IN THE ENVIRONMENT/ CATEGORY, IDENTITY, EXERCISE INDICATOR AND SPECIAL INTEREST INDICATOR FIELDS OF THIS MESSAGE.
		EMERGENCY STATUS CHANGE	3	SET OR CLEAR THE EMERGENCY INDICATOR FOR THE REFERENCE TN AS INDICATED BY THE VALUE IN THE ALERT STATUS CHANGE FIELD.
		FORCE TELL STATUS CHANGE	4	SET OR CLEAR THE FORCE TELL INDICATOR FOR THE REFERENCE TN AS INDICATED BY THE VALUE IN THE ALERT STATUS CHANGE FIELD.
		STRENGTH CHANGE	5	THE UNIT SPECIFIED IN THE SOURCE TN FIELD DIRECTS THAT THE STRENGTH OF

FIELD CODING FOR J7.0I				(SHEET 2)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1606	001	ACTION, TRACK MANAGEMENT -----	(CONTINUED)	
		EXERCISE STATUS ORDER	6	THE TRACK SPECIFIED IN THE REFERENCE TN BE CHANGED TO THAT SPECIFIED IN THE STRENGTH; STRENGTH, TOTAL NUMBER OF VEHICLES; AND/OR STRENGTH, PERCENT OF TRACKED VEHICLES FIELDS.
		UNDEFINED	7	SET THE IDENTITY OF ALL TRACKS WHICH ARE BEING REPORTED WITH THE EXERCISE INDICATOR SET TO ONE, AS FRIEND.
1750	001	CONTROLLING UNIT INDICATOR -----		THIS INDICATOR IDENTIFIES WHETHER OR NOT THE MESSAGE IN WHICH IT IS CONTAINED HAS BEEN ORIGINATED FROM A CONTROLLING UNIT.
		THIS MESSAGE DID NOT ORIGINATE FROM THE CONTROLLING UNIT	0	
		THIS MESSAGE ORIGINATED FROM THE CONTROLLING UNIT	1	
769	002	TRACK NUMBER, REFERENCE -----		A REFERENCE NUMBER USED TO ASSOCIATE INFORMATION AND DIRECTIVES WITH THE TRACK. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE- BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS.

FIELD CODING FOR J7.0I			(SHEET 3)
DFI	DUI	DUI/DI NAME	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)
			CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.
			CODING CHARACTER
			00000 0
			00001 1
			00010 2
			00011 3
			00100 4
			00101 5
			00110 6
			00111 7
			01000 A
			01001 B
			01010 C
			01011 D
			01100 E
			01101 F
			01110 G
			01111 H
			10000 J
			10001 K
			10010 L
			10011 M
			10100 N
			10101 P
			10110 Q
			10111 R
			11000 S
			11001 T
			11010 U
			11011 V
			11100 W
			11101 X
			11110 Y
			11111 Z
		00000	0
		00001-00076	1 THROUGH 62
			NO STATEMENT. ASSIGNED AS IDENTIFICATION NUMBERS

			FIELD CODING FOR J7.0I	(SHEET 4)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		00077	63	FOR C2 IUS (JU, PU, FJU, AND FPU).
		00100-00175	64 THROUGH 125	ILLEGAL.
		00176	126	ASSIGNED AS IDENTIFICATION NUMBERS
		00177	127	FOR C2 IUS (JU, RU, FJU, AND FRU).
		00200-07776	128 THROUGH 4094	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
				COLLECTIVE ADDRESS.
				ASSIGNED AS IDENTIFICATION NUMBERS
				FOR JUS AND ALLOCATED IN BLOCKS TO
				C2 IUS TO BE USED FOR TACTICAL
				INFORMATION REPORTING, E.G.,
				TRACKS AND REFERENCE POINTS.
		07777	4095	ILLEGAL.
		0A000-0Z777	4096 THROUGH 16383	ALLOCATED IN BLOCKS TO C2 JUS TO BE
				USED FOR TACTICAL INFORMATION
				REPORTING, E.G., TRACKS AND
				REFERENCE POINTS.
		10000-17777	16384 THROUGH 20479	ASSIGNED AS IDENTIFICATION NUMBERS
				FOR JUS AND ALLOCATED IN BLOCKS TO
				C2 JUS TO BE USED FOR TACTICAL
				INFORMATION REPORTING, E.G.,
				TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ALLOCATED IN BLOCKS TO C2 JUS TO BE
				USED FOR TACTICAL INFORMATION
				REPORTING, E.G., TRACKS AND
				REFERENCE POINTS.
		20000-27777	32768 THROUGH 36863	ASSIGNED AS IDENTIFICATION NUMBERS
				FOR JUS AND ALLOCATED IN BLOCKS TO
				C2 JUS TO BE USED FOR TACTICAL
				INFORMATION REPORTING, E.G.,
				TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE
				USED FOR TACTICAL INFORMATION
				REPORTING, E.G., TRACKS AND
				REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS
				FOR JUS AND ALLOCATED IN BLOCKS TO
				C2 JUS TO BE USED FOR TACTICAL
				INFORMATION REPORTING, E.G.,
				TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE
				USED FOR TACTICAL INFORMATION
				REPORTING, E.G., TRACKS AND

			FIELD CODING FOR J7.0I	(SHEET 5)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		40000-47777	65536 THROUGH 69631	REFERENCE POINTS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		70000-77776	114688 THROUGH 118782	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
386	013	STRENGTH ----- NO STATEMENT	0	EXPRESSES THE NUMBER OF ENTITIES REPRESENTED BY A SINGLE TRACK.

FIELD CODING FOR J7.0I

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
386	013	STRENGTH -----	(CONTINUED)	
		1 UNIT	1	
		2 UNITS	2	
		3 UNITS	3	
		4 UNITS	4	
		5 UNITS	5	
		6 UNITS	6	
		7 UNITS	7	
		8 UNITS	8	
		9 UNITS	9	
		10 UNITS	10	
		11 UNITS	11	
		12 UNITS	12	
		2 THROUGH 7 (FEW) UNITS	13	
		GREATER THAN 7 (MANY) UNITS	14	
		GREATER THAN 12 UNITS	15	
1751	001	ALERT STATUS CHANGE -----		THIS FIELD INDICATES THE ACTION TO BE ACCOMPLISHED (TO THE REFERENCE TN'S EMERGENCY OR FORCE TELL INDICATOR) AS SPECIFIED BY THE ACTION VALUE OF THE ACTION, TRACK MANAGEMENT FIELD.
		CLEAR ALERT STATUS INDICATOR	0	CHANGE THE REFERENCE TN'S EMERGENCY OR FORCE TELL INDICATOR (AS SPECIFIED BY THE ACTION VALUE OF THE ACTION, TRACK MANAGEMENT FIELD) FROM VALUE 1 TO VALUE 0.
		SET ALERT STATUS INDICATOR	1	CHANGE THE REFERENCE TN'S EMERGENCY OR FORCE TELL INDICATOR (AS SPECIFIED BY THE ACTION VALUE OF THE ACTION, TRACK MANAGEMENT FIELD) FROM VALUE 0 TO VALUE 1.
1663	001	IDENTITY CONFIDENCE -----		
		UNDEFINED	0 THROUGH 15	
376	007	IDENTITY -----		EXPRESSES THE STANDARD IDENTITY OF A TRACK.
		PENDING	0	A TRACK WHICH HAS NOT BEEN SUBJECTED TO THE IDENTIFICATION PROCESS.
		UNKNOWN	1	AN EVALUATED TRACK WHICH HAS NOT

			FIELD CODING FOR J7.0I	(SHEET 7)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
376	007	IDENTITY -----	(CONTINUED)	
		ASSUMED FRIEND	2	BEEN IDENTIFIED. A TRACK WHICH IS ASSUMED TO BE A FRIEND BECAUSE OF ITS CHARACTERISTICS, BEHAVIOR, OR ORIGIN.
		FRIEND	3	A TRACK BELONGING TO A DECLARED FRIENDLY NATION.
		NEUTRAL	4	A TRACK WHOSE CHARACTERISTICS, BEHAVIOR, ORIGIN, OR NATIONALITY INDICATE THAT IT IS NEITHER SUPPORTING NOR OPPOSING FRIENDLY FORCES.
		SUSPECT	5	A TRACK WHICH IS POTENTIALLY HOSTILE BECAUSE OF ITS CHARACTERISTICS, BEHAVIOR, ORIGIN, OR NATIONALITY.
		HOSTILE	6	A TRACK DECLARED TO BELONG TO ANY OPPOSING NATION, PARTY, GROUP, OR ENTITY, WHICH BY VIRTUE OF ITS BEHAVIOR OR INFORMATION COLLECTED ON IT SUCH AS CHARACTERISTICS, ORIGIN OR NATIONALITY CONTRIBUTES TO THE THREAT TO FRIENDLY FORCES.
		UNDEFINED	7	
376	001	IDENTITY AMPLIFYING DESCRIPTOR -----		A DESCRIPTOR ADDING TO THE STANDARD IDENTITY OF A TRACK INVOLVED IN AN EXERCISE. THE STANDARD IDENTITY IS FRIEND.
		EXERCISE PENDING	0	
		EXERCISE UNKNOWN	1	
		EXERCISE ASSUMED FRIEND	2	
		EXERCISE FRIEND	3	
		EXERCISE NEUTRAL	4	
		JOKER	5	
		FAKER	6	
		UNDEFINED	7	
1861	001	SPECIAL INTEREST INDICATOR -----		THE SPECIAL INTEREST INDICATOR IS USED TO INDICATE THAT THE TRACK IS OF SPECIAL INTEREST.
		NO STATEMENT	0	
		SPECIAL INTEREST	1	THE REFERENCE TN IS OF SPECIAL

FIELD CODING FOR J7.0I				(SHEET 8)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1861	001	SPECIAL INTEREST INDICATOR -----	(CONTINUED)	INTEREST. (A.) IF THIS FIELD IS SET TO ONE AND THE IDENTITY IS FRIEND THIS TRACK IS DEFINED AS A "KILO". (B.) IF THIS FIELD IS SET TO ONE AND THE TRACK ENVIRONMENT/CATEGORY IS AIR AND THE IDENTITY IS SUSPECT, THE TRACK IS DEFINED AS A "ZOMBIE". (C.) IF THIS FIELD IS SET TO ONE AND THE TRACK ENVIRONMENT/CATEGORY IS SURFACE (MARITIME) AND THE IDENTITY IS SUSPECT, THE TRACK IS DEFINED AS A "TRAVELLER". (D.) THE USE OF THIS INDICATOR WITH OTHER IDENTITIES IS YET TO BE DETERMINED.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J7.0E0

WORD TITLE: TRACK MANAGEMENT EXTENSION WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00					
															:						:STRENGTH, TOTAL:	WORD	:						
<---															:	STR, % TRKD VEH:					NUMBER OF	:FORMAT	:						
															:						:VEHICLES	:	:						
															:	4					:	4					:	2	:

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

SPARE

60																							
----	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50		
:																					---	>
:																						
:																						

WORD DESCRIPTION

WORD NUMBER: J7.0E0

WORD TITLE: TRACK MANAGEMENT EXTENSION WORD

REFERENCE			BIT	#	
DFI/DUI	DATA FIELD	DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD	FORMAT	0-	1 2	10
386 001	STRENGTH, TOTAL NUMBER OF	VEHICLES	2-	5 4	
386 002	STRENGTH, PERCENT OF TRACKED	VEHICLES (STR, % TRKD VEH)	6-	9 4	
756 060	SPARE		10-	69 60	

FIELD CODING FOR J7.0E0

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
386	001	STRENGTH, TOTAL NUMBER OF VEHICLES ----- NO STATEMENT 1 VEHICLE 2 VEHICLES 3 VEHICLES 4 THROUGH 5 VEHICLES 6 THROUGH 7 VEHICLES 8 THROUGH 10 VEHICLES 11 THROUGH 15 VEHICLES 16 THROUGH 20 VEHICLES 21 THROUGH 30 VEHICLES 31 THROUGH 40 VEHICLES 41 THROUGH 50 VEHICLES 51 THROUGH 70 VEHICLES 71 THROUGH 100 VEHICLES 101 THROUGH 200 VEHICLES GREATER THAN 200 VEHICLES	0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15	SPECIFIES THE TOTAL NUMBER OF VEHICLES ASSOCIATED WITH THE TN, REFERENCE.
386	002	STRENGTH, PERCENT OF TRACKED VEHICLES ----- NO STATEMENT <OR= 2% TRACKED VEHICLES >2%<OR= 4% TRACKED VEHICLES >4%<OR= 6% TRACKED VEHICLES >6%<OR= 8% TRACKED VEHICLES >8%<OR= 10% TRACKED VEHICLES >10%<OR= 15% TRACKED VEHICLES >15%<OR= 20% TRACKED VEHICLES >20%<OR= 25% TRACKED VEHICLES >25%<OR= 30% TRACKED VEHICLES >30%<OR= 40% TRACKED VEHICLES	0 1 2 3 4 5 6 7 8 9 10	SPECIFIES THE PERCENTAGE OF THE TOTAL NUMBER OF VEHICLES ASSOCIATED WITH THE TN, REFERENCE THAT ARE TRACKED TYPE VEHICLES.

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
386	002	STRENGTH, PERCENT OF TRACKED VEHICLES	(CONTINUED)	

		>40%<OR= 50% TRACKED VEHICLES	11	
		>50%<OR= 60% TRACKED VEHICLES	12	
		>60%<OR= 70% TRACKED VEHICLES	13	
		>70%<OR= 80% TRACKED VEHICLES	14	
		>80% TRACKED VEHICLES	15	

WORD MAP

WORD NUMBER: J7.0C1

WORD TITLE: TRACK MANAGEMENT CONTINUATION WORD 1

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00					
					:	SPACE SPECIFIC TYPE												:						:	:				
					:	AIR SPECIFIC TYPE												:						:	:				
					:	SURFACE (MARITIME) SPECIFIC TYPE												:	CONTINUATION WORD					:	WORD				
<---					:	SUBSURFACE (MARITIME) SPECIFIC TYPE												:	LABEL					:	FORMAT				
					:	LAND (GROUND) SPECIFIC TYPE												:						:	:				
					:	SPARE												:						:	:				
					:	12												:	5					:	2				
49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25					
SPARE																													
51																													
					:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50				
					:																				---				
					:																				>				
					:																								

WORD DESCRIPTION

WORD NUMBER: J7.0C1

WORD TITLE: TRACK MANAGEMENT CONTINUATION WORD 1

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	00001
749 002	SPACE SPECIFIC TYPE	7-	18 12	
804 001	AIR SPECIFIC TYPE	7-	18 12	
808 001	SURFACE (MARITIME) SPECIFIC TYPE	7-	18 12	
809 001	SUBSURFACE (MARITIME) SPECIFIC TYPE	7-	18 12	
810 001	LAND (GROUND) SPECIFIC TYPE	7-	18 12	
756 012	SPARE	7-	18 12	
756 051	SPARE	19-	69 51	

FIELD CODING FOR J7.0C1

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
749	002	SPACE SPECIFIC TYPE -----		THE SPECIFIC TYPE OF A POINT OR TRACK WITH AN ENVIRONMENT/CATEGORY OF SPACE.
		NO STATEMENT	0	
		FROG-7	1	
		HONEST JOHN	2	
		SAKR 80	3	
		SS-21 MOD 2	4	
		SS-21 MOD 3	5	
		HAFT-I	6	
		UNDEFINED	7 THROUGH 78	
		SHORT RANGE (0-65 DM)	79	
		ALACRAN	80	
		CHENG FENG	81	
		CONDOR	82	
		HAFT II	83	
		IRAN-130	84	
		LANCE	85	
		MB/EE-150	86	
		MB/EE-300	87	
		UNDEFINED	88	
		PRITHVI	89	
		SS-1B (SCUD-A)	90	
		SS-1C (SCUD-B)	91	
		SS-21 (SCARAB)	92	
		SS-300	93	
		B-610/CJS-98 (BG510)	94	
		NHK-I	95	
		NHK-II (HYON MU)	96	
		UNDEFINED	97 THROUGH 168	
		SHORT-MEDIUM RANGE (66-200 DM)	169	
		AL-HUSAYN	170	
		UNDEFINED	171	
		HAFT III	172	
		M-9	173	
		M-11	174	
		MB/EE-600	175	
		SCUD-C	176	
		SS-23 (SPIDER)	177	
		AL HUSSEIN	178	
		UNDEFINED	179 THROUGH 242	
		MEDIUM RANGE (201-400 DM)	243	
		AL-ABBAS	244	

FIELD CODING FOR J7.0C1

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
749	002	SPACE SPECIFIC TYPE	(CONTINUED)	

		JERICH0-I	245	
		AL HIJARAN	246	
		SONDA IV	247	
		UNDEFINED	248 THROUGH 330	
		MEDIUM-EXTENDED RANGE	331	
		(401-600 DM)		
		AL-FATAH	332	
		BADR-2000	333	
		CONDOR II	334	
		CSS-1	335	
		MB/EE-1000	336	
		SKY HORSE	337	
		SS-12A (SCALEBOARD A)	338	
		SS-12B (SCALEBOARD B)	339	
		SS1000	340	
		TIEN MA	341	
		UNDEFINED	342 THROUGH 416	
		EXTENDED RANGE (601-800	417	
		DM)		
		ARNISTON	418	
		CAPRICORNIO	419	
		JERICH0 II	420	
		NODONG-1	421	
		SS-N-5 (SERB)	422	
		UNDEFINED	423 THROUGH 496	
		EXTENDED-LONG RANGE	497	
		(801-1000 DM)		
		AGNI	498	
		AL/ABED	499	
		CC-4 (SANDAL)	500	
		CSS-5	501	
		UNDEFINED	502 THROUGH 575	
		LONG RANGE (1001-1350	576	
		DM)		
		CHEVALINE	577	
		CSS-2	578	
		CSS-3	579	
		CSS-4	580	
		CSS-N-3	581	
		M-4 SLBM	582	
		M-5 SLBM	583	
		M-20 SLBM	584	
		MIDGETMAN	585	

FIELD CODING FOR J7.0C1

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
749	002	SPACE SPECIFIC TYPE	(CONTINUED)	

		MINUTEMAN I	586	
		MINUTEMAN II	587	
		PEACEKEEPER	588	
		POLARIS A-3	589	
		POSEIDON C-3	590	
		SS-11 (SEGO)	591	
		SS-13 (SAVAGE)	592	
		SS-17 (SPANKER) MOD 1	593	
		SS-17 (SPANKER) MOD 2	594	
		SS-17 (SPANKER) MOD 3	595	
		SS-18 (SATAN) MOD 1	596	
		SS-18 (SATAN) MOD 2	597	
		SS-18 (SATAN) MOD 3	598	
		SS-20 (SABER)	599	
		SS-24 (SCALPEL)	600	
		SS-25 (SICKLE)	601	
		SS-N-6 (SAWFLY)	602	
		SS-N-8	603	
		SS-N-17 (SNIPE)	604	
		SS-N-18 (STINGRAY)	605	
		SS-N-20 (STURGEON)	606	
		SS-N-23 (SKIFF)	607	
		SSBS S-3	608	
		SSBS S-4	609	
		TRIDENT I (C-4)	610	
		TRIDENT II (D-5)	611	
		MODIFIED CSS-5	612	
		SS-19 MOD 3	613	
		UNDEFINED	614	
		NEW SOLID SLBM	615	
		CSS-NX-3	616	
		M4B	617	
		M45	618	
		UNDEFINED	619 THROUGH 786	
		>1350 DM	787	
		ABM-1B (GALOSH)	788	
		ARROW	789	
		ASTER	790	
		CORPS SAM	791	
		ERINT	792	
		HAWK	793	
		PATRIOT	794	
		SA-10 (GRUMBLE)	795	

FIELD CODING FOR J7.0C1

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

749	002	SPACE SPECIFIC TYPE	(CONTINUED)	

		SA-12A (GLADIATOR)	796	
		SA-12B (GIANT)	797	
		SA-N-6 (GRUMBLE)	798	
		SH-08 (GAZELLE)	799	
		STANDARD MISSILE BLOCK	800	
		IVA		
		THAAD	801	
		SM-2 BLOCK IV	802	
		SM-3 LEAP	803	
		UNDEFINED	804 THROUGH 876	
		INTERCEPTOR	877	
		OPERATIONAL COMMANDER	878 THROUGH 941	
		DEFINED 1-64		
		UNDEFINED	942 THROUGH 1022	
		BALLISTIC MISSILE	1023	
		GENERAL		
		UNDEFINED	1024 THROUGH 2046	
		SPACE GENERAL	2047	
		UNDEFINED	2048 THROUGH 4093	
		RESET TO NO STATEMENT	4094	
		UNDEFINED	4095	

804	001	AIR SPECIFIC TYPE		THE SPECIFIC TYPE OF POINT OR TRACK WITH AN ENVIRONMENT/CATEGORY OF AIR.

		NO STATEMENT	0	

		FIGHTER		

		F-4 PHANTOM II	1	
		F-5 TIGER II	2	
		F-8 CRUSADER	3	
		F-14 TOMCAT	4	
		F-15 EAGLE	5	
		F-16 FIGHTING FALCON	6	
		F-101 VOODOO	7	
		F-104 STARFIGHTER	8	
		F-105 THUNDERCHIEF	9	
		F-106 DELTA DART	10	
		F-111 (GENERAL DYNAMICS)	11	
		F/A-18 HORNET	12	

FIELD CODING FOR J7.0C1

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		EFA	13	
		F-102	14	
		F-100	15	
		DISUSED	16	
		DISUSED	17	
		COMMANDO	18	
		DISUSED	19	
		DISUSED	20	
		J-35 DRAKEN	21	
		JAGUAR	22	
		SUPER ETENDARD	23	
		DISUSED	24 THROUGH 26	
		F-1 (MITSUBISHI)	27	
		F-35XD DRAKEN	28	
		DISUSED	29	
		HF-24 MARUT (WIND SPIRIT)	30	
		JA37 VIGGEN	31	
		DISUSED	32	
		SF-5 FREEDOM FIGHTER	33	
		IAR-91 ORAO	34	
		AJEET INVINCIBLE	35	
		KFIR C2	36	
		MIRAGE F1	37	
		MIRAGE 3	38	
		MIRAGE 5	39	
		MIRAGE 50	40	
		MIRAGE 2000	41	
		DISUSED	42	
		DISUSED	43	
		ALPHA JET	44	
		KEFIR	45	
		F-6 FARMER	46	
		F-8 FISHBED	47	
		F-9 FANTAN	48	
		F-12 (CHINA)	49	
		SU-7 FITTER	50	
		SU-9 FISHPOT	51	
		SU-11 FLAGON	52	
		SU-15 FLAGON	53	
		SU-17 FITTER	54	
		SU-19 FENCER	55	
		SU-20 FITTER	56	

FIELD CODING FOR J7.0C1

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		SU-22 FITTER	57	
		SU-24 FENCER	58	
		SU-25 FROGFOOT	59	
		TU-28 FIDDLER	60	
		TU-128 FIDDLER	61	
		MIG-21 FISHBED	62	
		MIG-23 FLOGGER	63	
		MIG-25 FOXBAT	64	
		MIG-27 FLOGGER	65	
		YAK-28 FIREBAR	66	
		YAK-36 FORGER	67	
		AAF "RAM-J"	68	
		MIG-15 FAGOT	69	
		MIG-17 FRESCO	70	
		MIG-19 FARMER	71	
		SU-27 FLANKER	72	
		MIG-29 FULCRUM	73	
		MIG-31 FOXHOUND	74	
		YAK-38 FORGER-A	75	
		F-22 RAPTOR	76	
		F-84 THUNDERSTREAK	77	
		F-86 SABRE	78	
		F/A2 SEA HARRIER	79	
		IDF CHING-KUO (TAIWAN)	80	
		JAS-39 GRIPPEN	81	
		JIAN JI-7	82	
		JIAN JI-8-2	83	
		JOINT STRIKE FIGHTER	84	
		KFIR C7	85	
		KFIR 2000	86	
		RAFALE	87	
		SU-30	88	
		SU-33 (SU-27K)	89	
		SU-34	90	
		SU-35	91	
		SU-37	92	
		SU-39	93	
		YAK-141 FREESTYLE	94	
		F-5 FRESCO	95	
		F-7 FISHBED	96	
		J-9	97	
		RT33	98	
		CF-188 HORNET	99	

FIELD CODING FOR J7.0C1

(SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		UNDEFINED	100	
		TORNADO F3	101	
		SEA HARRIER	102	
		F-5 NORTHROP	103	
		UNDEFINED	104 THROUGH 254	
		FIGHTER GENERAL	255	

		BOMBERS/ATTACK		

		A-4 SKYHAWK	256	
		A-6 INTRUDER	257	
		A-7 CORSAIR II	258	
		A-10 THUNDERBOLT II	259	
		A-37 DRAGONFLY	260	
		B-1 (ROCKWELL)	261	
		B-52 STRATOFORTRESS	262	
		AC-130 HERCULES	263	
		AV-8 HARRIER	264	
		F/A-18 HORNET	265	
		FB-111 (GENERAL DYNAMICS)	266	
		A-1	267	
		TA-28	268	
		DISUSED	269	
		AC-47	270	
		AC-119	271	
		AC-124	272	
		ALPHA JET	273	
		DISUSED	274 THROUGH 276	
		35XD DRAKEN	277	
		J-1 HAWK	278	
		J-1 JAESTREB	279	
		S-2	280	
		AJ37 VIGGEN	281	
		HA220 SUPER SAETA	282	
		M.B.326 (AERMACCHI)	283	
		M.B.339 (AERMACCHI)	284	
		SF 260 WARRIER	285	
		SK 60 (SAAB)	286	
		BAC 167 STRIKEMASTER	287	
		TORNADO GR-1 (IDS)	288	

FIELD CODING FOR J7.0C1

(SHEET 8)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		IL-28 BEAGLE	289	
		MI-4 BISON	290	
		TU-16 BADGER	291	
		TU-22 BLINDER	292	
		TU-22M BACKFIRE	293	
		TU-95 BEAR	294	
		TU-142 BEAR	295	
		YAK-28 BREWER	296	
		SUPER ENTENDARD	297	
		TU-160 BLACKJACK	298	
		AMX	299	
		FRS1 SEA HARRIER	300	
		FRS2 SEA HARRIER	301	
		FRS51 SEA HARRIER	302	
		F-117 NIGHTHAWK	303	
		G4 SUPER GALEB	304	
		G91Y	305	
		HAWK-2000	306	
		HAWK-100	307	
		HAWK-200	308	
		HAWK-50	309	
		HAWK-60	310	
		IA-58 PUCARA	311	
		IAR-93 ORAO	312	
		IAR-99 SOIM	313	
		JIAN JI-5M	314	
		A-5 FANTAN	315	
		L59 ALBATROS	316	
		B-2 SPIRIT	317	
		B-7 HONGZHA	318	
		1050E	319	
		A3 LEI MING	320	
		HARRIER GR4/7	321	
		TORNADO GR4	322	
		AV-8B HARRIER PLUS	323	
		CF-188 HORNET	324	
		RAFALE	325	
		UNDEFINED	326 THROUGH 510	
		BOMBER/ATTACK GENERAL	511	

FIELD CODING FOR J7.0C1

(SHEET 9)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		PATROL/RECON/ELECTRONIC/ TANKER/GENERAL		

		E-2 HAWKEYE	512	
		E-3 SENTRY (AWACS)	513	
		E-4 NEACP	514	
		EA-3	515	
		EA-6 PROWLER	516	
		EB-57 (DOUGLAS)	517	
		EC-130 HERCULES	518	
		EC-135 (BOEING)	519	
		EF-4 WILD WEASEL	520	
		EF-111 (GENERAL DYNAMICS)	521	
		EP-3 ORION	522	
		KA-3 (DOUGLAS)	523	
		KA-6 (GRUMMAN)	524	
		KC-10 EXTENDER	525	
		KC-130 HERCULES	526	
		KC-135 STRATOTANKER	527	
		O-1 BIRD DOG	528	
		O-2 (CESSNA)	529	
		OV-1 MOHAWK	530	
		OV-10 BRONCO	531	
		P-2 NEPTUNE	532	
		P-3 ORION	533	
		RC-130 HERCULES	534	
		RC-135 (BOEING)	535	
		RF-4 PHANTOM II	536	
		RF-5 (NORTHROP)	537	
		RF-8 CRUSADER	538	
		RF-14 TOMCAT	539	
		RF-104 STARFIGHTER	540	
		RP-3 ORION	541	
		RU-21 UTE	542	
		S-2 TRACKER	543	
		S-3 VIKING	544	
		SR-71 BLACKBIRD	545	
		U-2 (LOCKHEED)	546	
		U-4 AERO COMMANDER	547	
		U-5 H-500 TWIN	548	

FIELD CODING FOR J7.0C1

(SHEET 10)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		U-8 SEMINOLE	549	
		U-10 COURIER	550	
		UC-12 HURON	551	
		U-21 UTE	552	
		US-3 VIKING	553	
		OA-37 DRAGONFLY	554	
		TR-1	555	
		WC-130 HERCULES	556	
		E-1 TRACER	557	
		EB-66	558	
		EC-121	559	
		RA-3	560	
		SEA SCAN	561	
		FALCON 20 GUARDIAN	562	
		BR 1150 ATL1	563	
		RF-35XD DRAKEN	564	
		BN-2 MARITIME DEFENDER	565	
		DISUSED	566	THROUGH 567
		CP-140 AURORA	568	
		HS.748 COASTGUARDER	569	
		HS.801 NIMROD	570	
		DISUSED	571	
		MK.3	572	
		RJ-1 HAWK	573	
		RJ-1 JAESTREB	574	
		SS-2	575	
		PEACE SENTINEL	576	
		KC-97	577	
		AU-24	578	
		AU-23	579	
		U-21	580	
		U-17	581	
		HU-16	582	
		U-9	583	
		U-3	584	
		RU-21	585	
		NKC-135	586	
		RF-101	587	
		RF-111	588	
		RB-57	589	
		RB-66	590	
		RC-121	591	
		BE-12 MAIL	592	

FIELD CODING FOR J7.0C1

(SHEET 11)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		IL-38 MAY	593	
		TU-126 MOSS	594	
		BE-6	595	
		VC-10 (TANKER)	596	
		AN-12 CUB-A (ELINT)	597	
		AN-12 CUB-C (EA)	598	
		AN-12 CUB-D (EA)	599	
		IL-20 COOT-A (ELINT)	600	
		IL-76 MAINSTAY	601	
		E-8 (J STARS)	602	
		TORNADO ECR	603	
		E-6 MERCURY	604	
		EMB-111	605	
		MU-2S	606	
		A40 ALBATROS	607	
		BE42 ALBATROS	608	
		CL215 AMPHIBIAN	609	
		IAI 1125	610	
		IL22 COOT B	611	
		J32 LANSEN	612	
		SH5 HARBIN	613	
		TIER1	614	
		TIER2	615	
		TIER3	616	
		US1 (SHIN)	617	
		C-212 CASA	618	
		CESSNA 550 CITATION II	619	
		CESSNA 560 CITATION V	620	
		CL 215 CANADAIR	621	
		DORNIER 27	622	
		F-27 FOKKER	623	
		NIMROD MRA4	624	
		CP-140A AURORA/ARCTURUS	625	
		RC-135 RIVET JOINT	626	
		ATL 2	627	
		ETENDARD IV P	628	
		ALIZE	629	
		FALCON 50	630	
		MIRAGE IV	631	
		MIRAGE 2000	632	
		BR 1150 GE ATL ASW	633	
		BR 1150 GE ATL SIGINT	634	
		C-130 HERCULES TANKER	635	

FIELD CODING FOR J7.0C1

(SHEET 12)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		ASTOR	636	
		UNDEFINED	637 THROUGH 761	
		TANKER	762	
		RECONNAISSANCE (RECON)	763	
		ELECTRONIC WARFARE (EW)	764	
		ASW	765	
		AEW AND C	766	
		MISCELLANEOUS GENERAL	767	

		TRAINER		

		T-2 BUCKEYE	768	
		T-28 TROJAN	769	
		T-29 (CONVAIR)	770	
		T-34 MENTOR	771	
		T-37 TWEET	772	
		T-38 TALON	773	
		T-39 SABERLINER	774	
		T-41 MESCALERO	775	
		T-42 CONCHISE	776	
		T-43 (BOEING)	777	
		T-44 KING AIR	778	
		TA-4 SKYHAWK	779	
		TA-7 CORSAIR II	780	
		T-33	781	
		ALPHA JET	782	
		B3LA (SAAB)	783	
		C-101 AVIOJET	784	
		G2-A GALEB	785	
		G2-A SEAGULL	786	
		L-29 DELFIN	787	
		L-29 MAYA	788	
		L-39 ALBATROS	789	
		L-70 MILTRAINER	790	
		L-450	791	
		P.55 (PARTENAVIA)	792	
		T-2 (MITSUBISHI)	793	
		CM 170 MAGISTER	794	
		M.B.339 (AERMACCHI)	795	
		T-2 (MITSUBISHI)	796	
		CM AU/ MAGISTER	797	

FIELD CODING FOR J7.0C1

(SHEET 13)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	
		M.B.339 (AERMACCHI)	798	
		SF-260 (SIAI-MARCHETTI)	799	
		SH 37 VIGGEN	800	
		QH-50 DRAGEN	801	
		SK 37 VIGGEN	802	
		SK 60 (SAAB)	803	
		TB30 EPSILON	804	
		TF-35XD	805	
		TJ-1 HAWK	806	
		TJ-1 JASTRAEB	807	
		TS.11 SPARK	808	
		AW1-2 FAN TRAINER	809	
		DISUSED	810	
		HJT-16 KIRAN	811	
		MBB223 FLAMINGO	812	
		SU-11 MAIDEN	813	
		SU-15	814	
		MIG-15 MIDGET	815	
		MIG-17	816	
		MIG-21 MONGOL	817	
		MIG-23	818	
		MIG-25	819	
		YAK-11 MOOSE	820	
		YAK-18 MAX	821	
		YAK-28 MAESTRO	822	
		TF-104 STARFIGHTER	823	
		T-46A	824	
		EMB-312 TOUCAN	825	
		T-45 GOSHAWK	826	
		T-47	827	
		AS202	828	
		CT114 TUTOR	829	
		G91T (FIAT JET 1)	830	
		K8 (NAMC)	831	
		L70 VINKA	832	
		STRIKEMASTER (BAE)	833	
		T1 JAYHAWK	834	
		T4 (KAWASAKI)	835	
		CT-142 DASH 8	836	
		B-55 BARON	837	
		F-33 BONANZA	838	
		839 PILLAN-TAMIZ	839	
		CT-133 SILVERSTAR	840	

FIELD CODING FOR J7.0C1

(SHEET 14)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		UNDEFINED	841 THROUGH 1022	
		TRAINER GENERAL	1023	

		TRANSPORT/AIRLINER		

		C-1 (GRUMMAN COD)	1024	
		C-2 GREYHOUND	1025	
		C-5 GALAXY	1026	
		C-7 CARIBOU	1027	
		C-9 NIGHTINGALE	1028	
		C-12 HURON	1029	
		C-123 PROVIDER	1030	
		C-130 HERCULES	1031	
		C-135 STRATOLIFTER	1032	
		C-140 JETSTAR	1033	
		C-141 STARLIFTER	1034	
		HC-130 HERCULES	1035	
		VC-6 KING AIR	1036	
		VC-9 SKYTRAIN II	1037	
		VC-11 GULFSTREAM	1038	
		VC-137 (BOEING)	1039	
		707 (BOEING)	1040	
		720 (BOEING)	1041	
		727 (BOEING)	1042	
		737 (BOEING)	1043	
		747 (BOEING)	1044	
		757 (BOEING)	1045	
		767 (BOEING)	1046	
		L-100 HERCULES	1047	
		L-1011 TRI STAR	1048	
		DC-8 (DOUGLAS)	1049	
		DC-9 (DOUGLAS)	1050	
		DC-10 (DOUGLAS)	1051	
		C-119	1052	
		DC-130	1053	
		HC-97	1054	
		C-JM	1055	
		C-54	1056	
		C-97	1057	
		C-118	1058	
		C-119	1059	

FIELD CODING FOR J7.0C1

(SHEET 15)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		C-121	1060	
		C-124	1061	
		C-131	1062	
		C-133	1063	
		VC-47	1064	
		CV-54	1065	
		CV-140	1066	
		ARAVA	1067	
		CONCORDE	1068	
		ISLANDER	1069	
		SKYVAN	1070	
		TRIDENT	1071	
		A300 AIRBUS	1072	
		A310 AIRBUS	1073	
		C-1 (KAWASKI)	1074	
		C-160 TRANSALL	1075	
		C.207 AZOR	1076	
		C-212 AVIOCAR	1077	
		F27 FRIENDSHIPS	1078	
		F28 FELLOWSHIP	1079	
		G222 SAMA	1080	
		AW.660 ARGOSY	1081	
		BAC111 ONE-ELEVEN	1082	
		DHC-5 BUFFALO	1083	
		DHC-7 DASH	1084	
		AN-2 COLT	1085	
		AN-10 CAT	1086	
		AN-12 CUB	1087	
		AN-14 CLOD	1088	
		AN-22 COCK	1089	
		AN-24 COKE	1090	
		AN-26 CURL	1091	
		AN-28 CASK	1092	
		AN-30 CLANK	1093	
		AN-32 CLINE	1094	
		AN-40 (VERY LARGE TURBO-PROP)	1095	
		AN-72 COALER	1096	
		IL-12 COACH	1097	
		IL-18 COOT	1098	
		IL-62 CLASSIC	1099	
		IL-76 CANDID	1100	
		IL-86 CAMBER	1101	

FIELD CODING FOR J7.0C1

(SHEET 16)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		TU-114 CLEAT	1102	
		TU-134 CRUSTY	1103	
		TU-144 CHARGER	1104	
		TU-154 CARELESS	1105	
		YAK-40 CODDLING	1106	
		YAK-42 CLOBBER	1107	
		TU-104	1108	
		YAK-27	1109	
		IL-38	1110	
		DISUSED	1111	
		DO-228 LT (TRANSPORT)	1112	
		DISUSED	1113	
		AN-74	1114	
		AN-124 CONDOR	1115	
		A320 AIRBUS	1116	
		A321 AIRBUS	1117	
		A330 AIRBUS	1118	
		A340 AIRBUS	1119	
		AN-70	1120	
		AN-225 COSSACK	1121	
		BAE-125-600	1122	
		BAE146	1123	
		777 (BOEING)	1124	
		C-17 GLOBEMASTER III	1125	
		C-20 GULFSTREAM 3/4	1126	
		C-21 LEARJET 35	1127	
		C-22	1128	
		C-23 SHERPA/SHORTS 330	1129	
		C-26 METRO 3	1130	
		YS 11 (NAMC)	1131	
		CL-600 CHALLENGER	1132	
		CL-601 CHALLENGER	1133	
		CN-235M (AIRTECH)	1134	
		EMB-120 BRASILLIA ADV	1135	
		EMB-145 AMAZON	1136	
		IL-78 MIDAS	1137	
		MD-11	1138	
		MD-80	1139	
		MD-90	1140	
		PD-808	1141	
		TU-44	1142	
		V-22 OSPREY	1143	
		VC-25	1144	

FIELD CODING FOR J7.0C1

(SHEET 17)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		XC-2	1145	
		1124 (IAI)	1146	
		1900 (BEECH)	1147	
		330 (SHORTS)	1148	
		580 (CONVAIR)	1149	
		ATR42	1150	
		B55 BARON	1151	
		BN2 ISLANDER	1152	
		C46 COMMANDO	1153	
		CARAVELL (SUD)	1154	
		CC109 (CANADAIR)	1155	
		CHALLENGER (CANADAIR)	1156	
		DHC2	1157	
		DHC6 TWIN OTTER	1158	
		DHC8	1159	
		EMB110 BANDEIRANTE	1160	
		EMB121	1161	
		FALCON 200/FALCON 20	1162	
		FALCON 50	1163	
		FALCON 900	1164	
		FH227 FRIENDSHIP	1165	
		FOKKER 100	1166	
		FOKKER 50	1167	
		FOKKER 60	1168	
		FOKKER 70	1169	
		GROB G850	1170	
		GULFSTREAM 1	1171	
		GULFSTREAM 2	1172	
		JETSTREAM	1173	
		JETSTREAM 31	1174	
		KING AIR	1175	
		L410 TURBOJET	1176	
		LEARJET 23	1177	
		LEARJET 24	1178	
		LEARJET 25 (IMPROVED VER	1179	
		28)		
		LEARJET 35/36	1180	
		LEARJET 55 (IMPROVED VER	1181	
		28)		
		LEARJET 60	1182	
		MERLIN 2	1183	
		MERLIN 3	1184	
		MERLIN 4	1185	

FIELD CODING FOR J7.0C1

(SHEET 18)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		METRO 3	1186	
		SAAB 2000	1187	
		SAAB 340	1188	
		SABRELINER	1189	
		U6 BEAVER	1190	
		VISCOUNT	1191	
		W3 SOKOL	1192	
		Y11 (HAMC)	1193	
		Y12 (HAMC)	1194	
		Y5	1195	
		CC-115 BUFFALO	1196	
		CC-130 HERCULES	1197	
		CC-150 POLARIS	1198	
		C-235 CASA	1199	
		CC-138 TWIN OTTER	1200	
		DO-228 LM (POLLUTION CONTROL)	1201	
		UNDEFINED	1202 THROUGH 1277	
		LIGHT CIVIL	1278	
		TRANSPORT/AIRLINER	1279	
		GENERAL		

		HELICOPTERS		

		AH-1 COBRA	1280	
		AH-64 APACHE	1281	
		CH-3 (SIKORSKY)	1282	
		CH-46 (SEA KNIGHT)	1283	
		CH-47 CHINOOK	1284	
		CH-53 SEA STALLION	1285	
		CH-54 LARKE (SKYCRANE)	1286	
		EH-60 QUICK FOX	1287	
		HH-1 IROQUOIS	1288	
		HH-2 SEA SPRITE	1289	
		HH-3 JOLLY GREEN	1290	
		HH-52 (SIKORSKY)	1291	
		HH-53 (SIKORSKY)	1292	
		OH-6 (HUGHES)	1293	
		OH-58 KIOWA	1294	
		RH-3 SEA KING	1295	
		RH-53 (SIKORSKY)	1296	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		SH-2 SEA SPRITE	1297	
		SH-3 SEA KING	1298	
		SH-60 SEA HAWK	1299	
		UH-1 IROQUOIS	1300	
		UH-2 SEA SPRITE	1301	
		UH-12 (HILLER)	1302	
		UH-46 (BOEING)	1303	
		UH-60 BLACK HAWK	1304	
		CH-2U	1305	
		HH-43	1306	
		A109 (AGUSTA)	1307	
		A129 MONGOOSE	1308	
		BO-105 (MBB)	1309	
		DISUSED	1310	
		CH-124 SEA KING	1311	
		DISUSED	1312	THROUGH 1314
		SA 315 LAMA	1315	
		DISUSED	1316	
		DISUSED	1317	
		SA 321 SUPER FRELON	1318	
		SA 330 PUMA	1319	
		SA 332 SUPER PUMA	1320	
		S 342 GAZELLE	1321	
		SA 350 ASTAR	1322	
		SA 360 DAUPHIN	1323	
		SA 361 DAUPHIN	1324	
		WG-13 LYNX	1325	
		WG-34 (WESTLAND)	1326	
		KA-18 HOG	1327	
		KA-20 HARP	1328	
		KA-25 HORMONE	1329	
		KA-26 HOODLUM	1330	
		MI-1 HARE	1331	
		MI-2 HOPLITE	1332	
		MI-4 HOUND	1333	
		MI-6 HOOK	1334	
		MI-8 HIP	1335	
		MI-10 HARKE	1336	
		MI-12 HOMER	1337	
		MI-14 HAZE	1338	
		MI-24 HIND	1339	
		MI-26 HALO	1340	
		CH-53E SUPER STALLION	1341	

FIELD CODING FOR J7.0C1

(SHEET 20)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		MH-53E SEA DRAGON	1342	
		HH-60 NIGHT HAWK	1343	
		HH-65A DOLPHIN	1344	
		KA-27 HELIX-A (ASW)	1345	
		KA-32 HELIX	1346	
		MI-17 HIP-H	1347	
		MI-28 HAVOC	1348	
		ECUREUIL/FENNEL/ESQILO	1349	
		KA-29 HELIX-B	1350	
		KA-50 HOKUM	1351	
		204 BELL	1352	
		205 BELL	1353	
		206 BELL	1354	
		214 BELL	1355	
		280 ENSTROM	1356	
		300 SCHWEIZER	1357	
		406 COMBAT SCOUT	1358	
		A 109 HIRUNDO	1359	
		A 129 MANGUSTA	1360	
		AH 6 CAYUSE	1361	
		ALOUETTE 2	1362	
		ALOUETTE 3	1363	
		AS 350 ECUREUIL	1364	
		AS 532 COUGAR	1365	
		AS 550 FENNEC	1366	
		AS 555 FENNEC	1367	
		AS 565 PANTHER	1368	
		CH 34 WESTLAND	1369	
		EH 101	1370	
		HAS 1 WASP	1371	
		KA-28 HELIX A	1372	
		MD 500 DEFENDER	1373	
		MI 22	1374	
		MI 25	1375	
		MI 35	1376	
		MI 9	1377	
		SA 341 GAZELLE	1378	
		SA 342 GAZELLE	1379	
		SA 365 DAUPHIN 2	1380	
		TS11 ISKRA	1381	
		WESSEX	1382	
		Z9 (HARBIN)	1383	
		CH-146 GRIFFON	1384	

FIELD CODING FOR J7.0C1

(SHEET 21)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		SEA KING AEW (SKW)	1385	
		EH 101 MERLIN	1386	
		AB-212 AUGUSTA BELL	1387	
		BO-105 BOLKOW	1388	
		CH-47 CHINOOK	1389	
		HUGHES 500	1390	
		HUGHES 3000	1391	
		SH-3D SIKORSKY	1392	
		SH-70L SIKORSKY	1393	
		CH-113 LABRADOR	1394	
		NH 90 (C2)	1395	
		NH 90 (RECCE)	1396	
		NH 90 (EW/SEAD)	1397	
		NH 90 (TRANSPORT)	1398	
		SEA LYNX MK88A	1399	
		SEA KING MK41 (KWS)	1400	
		TIGER (HAP)	1401	
		NH 90 (NAVY)	1402	
		TIGER (HAC)	1403	
		SA 341 GAZELLE CANON	1404	
		AS 532 COUGAR HORIZON	1405	
		AW-520 SAR CORMORANT	1406	
		UNDEFINED	1407 THROUGH 1534	
		HELICOPTER GENERAL	1535	

		AIR-AIR MISSILES		

		AIM-4A FALCON	1536	
		AIM-7 SPARROW	1537	
		AIM-9 SIDEWINDER	1538	
		AIM-54 PHOENIX	1539	
		AIM-2A GENIE	1540	
		AIM-120 AMRAAM	1541	
		ASLAM	1542	
		R.530	1543	
		R.550 MAGIC	1544	
		S.530 SUPER 530	1545	
		ASPIDE	1546	
		DISUSED	1547	
		SHAFRIR	1548	
		SKY FLASH	1549	

FIELD CODING FOR J7.0C1

(SHEET 22)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		DISUSED	1550	
		AA-2 ATOLL	1551	
		AA-3 ANAB	1552	
		AA-5 ASH	1553	
		AA-6 ACRID	1554	
		AA-7 APEX	1555	
		AA-8 APHID	1556	
		AAM	1557	
		AA-9 AMOS	1558	
		AA-XP-1/2	1559	
		AQM-34	1560	
		AQM-91	1561	
		BGM-34 FIREBEE/MQM34	1562	
		YQM-94	1563	
		YQM-98	1564	
		AIM-132 ASRAAM	1565	
		MICA	1566	
		PL-2A	1567	
		PL-5B	1568	
		PL-7	1569	
		PL-9	1570	
		PYTHON 3	1571	
		PYTHON 4	1572	
		AA-10 ALAMO	1573	
		AA-11 ARCHER	1574	
		AA-12 ADDER	1575	
		AA-1 ALKALI	1576	
		AAM-1	1577	
		UNDEFINED	1578 THROUGH 1790	
		AIR-TO-AIR MISSILE	1791	
		GENERAL		

		AIR-GROUND/GROUND-		
		GROUND MISSILES		

		AGM-45 SHRIKE	1792	
		AGM-65 MAVERICK	1793	
		AGM-69 SRAM	1794	
		AGM-78 STANDARD ARM	1795	
		AGM-84 HARPOON	1796	
		AGM-86 ALCM	1797	

FIELD CODING FOR J7.0C1

(SHEET 23)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		AGM-88 HARM	1798	
		AGM-109 TOMAHAWK	1799	
		AM 39 EXOCET	1800	
		AGM-119 PENGUIN	1801	
		AS 11 KILTER	1802	
		AS 12 KEGLER	1803	
		AS 15 KENT	1804	
		AS 30	1805	
		DISUSED	1806	
		RB 05	1807	
		RB 08	1808	
		ADVANCED ASM	1809	
		AS-1 KENNEL	1810	
		AS-2 KIPPER	1811	
		AS-3 KANGAROO	1812	
		AS-4 KITCHEN	1813	
		AS-5 KELT	1814	
		AS-6 KINGFISH	1815	
		AS-7 KERRY	1816	
		DISUSED	1817	
		AS-10 KAREN	1818	
		AS-9 KYLE	1819	
		AS 34 KORMORAN	1820	
		ASM GABRIEL	1821	
		ASM SEA SKUA	1822	
		ASM SEA EAGLE	1823	
		ASMP	1824	
		AT-2 SWATTER	1825	
		AT-3 SAGGER	1826	
		AT-6 SPIRAL	1827	
		C-601	1828	
		C-611	1829	
		C-801	1830	
		C-802	1831	
		CSS-2	1832	
		CSS-3	1833	
		CSS-N-3	1834	
		CSS-X-4	1835	
		FL-2 SILKWORM	1836	
		FL-7	1837	
		HY-2	1838	
		HY-3	1839	
		M-9/11	1840	

FIELD CODING FOR J7.0C1

(SHEET 24)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		WS-1	1841	
		AS-13 KINGBOLT	1842	
		AS-14 KEDGE	1843	
		AS-16 KICKBACK	1844	
		AS-17 KRYPTON	1845	
		AS-18 KAZOO	1846	
		AT-4 SPIGOT	1847	
		AT-5 SPANDREL	1848	
		AT-7 SAXHORN	1849	
		AT-10 STABBER	1850	
		AT-11 SNIPER	1851	
		AT-12	1852	
		AT-13	1853	
		AT-14	1854	
		FROG-7	1855	
		SS-1 SCUD	1856	
		SS-11 SEGO	1857	
		SS-13 SAVAGE	1858	
		SS-18 SATAN	1859	
		SS-19 STILETTO	1860	
		SS-24 SCALPEL	1861	
		SS-25 SICKLE	1862	
		SS-N-2 STYX	1863	
		SS-N-3 SHADDOCK	1864	
		SS-N-6 SERB	1865	
		SS-N-7 STARBRIGHT	1866	
		SS-N-8 SAWFLY	1867	
		SS-N-9 SIREN	1868	
		SS-N-12 SANDBOX	1869	
		SS-N-18 STINGRAY	1870	
		SS-N-19 SHIPWRECK	1871	
		SS-N-20 STURGEON	1872	
		SS-N-21 SAMPSON	1873	
		SS-N-22 SUNBURN	1874	
		SS-N-23 SKIFF	1875	
		SS-N-26	1876	
		AGNI	1877	
		PRITHVI	1878	
		TOW	1879	
		AGM-114 HELLFIRE	1880	
		MLRS	1881	
		HOT	1882	
		MILAN	1883	

FIELD CODING FOR J7.0C1

(SHEET 25)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		TRIGAT	1884	
		OTOMAT	1885	
		RBS-15M	1886	
		ARMAT	1887	
		ALARM	1888	
		AGM-12 BULLPUP	1889	
		AGM-62A WALLEYE	1890	
		AGM-123A SKIPPER II	1891	
		APACHE (ASM)	1892	
		AS 8	1893	
		AT-1 SWATTER	1894	
		CAS1	1895	
		KH-41 MOSKIT	1896	
		MARTIN PESCADOR	1897	
		MAS1 CARCARA	1898	
		RB 04E	1899	
		STAR	1900	
		SEA INDIGO	1901	
		MM 38	1902	
		MM 40	1903	
		SM 39	1904	
		AS 34 KORMORAN II	1905	
		UNDEFINED	1906 THROUGH 2046	
		AIR-GROUND MISSILE	2047	
		GENERAL		

		SURFACE TO AIR MISSILES		

		FIM-92 STINGER	2048	
		NIM-23 HAWK	2049	
		MIM-42 REDEYE	2050	
		MIM-72 CHAPARRAL	2051	
		MIM-104 PATRIOT	2052	
		RIM-2 TERRIER	2053	
		RIM-7 SEA SPARROW	2054	
		RIM-8 TALOS	2055	
		RIM-24 TARTAR	2056	
		RIM-66 STANDARD MISSILE	2057	
		RIM-67 STANDARD MISSILE	2058	
		BLOWPIPE	2059	
		DISUSED	2060 THROUGH 2061	

FIELD CODING FOR J7.0C1

(SHEET 26)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		SEA DART	2062	
		DISUSED	2063	
		SEA WOLF	2064	
		S 440 CROTALE EDIR	2065	
		RAPIER	2066	
		RBS-70 (SLM)	2067	
		DISUSED	2068	
		SAM ROLAND	2069	
		SA-2 GUIDELINE	2070	
		SA-3 GOA	2071	
		SA-4 GANEF	2072	
		SA-N-3 GOBLET	2073	
		SA-5 GAMMON	2074	
		SA-N-4 GECKO	2075	
		SA-6 GAINFUL	2076	
		SA-N-6 GRUMBLE	2077	
		SA-7 GRAIL	2078	
		SA-8 GECKO	2079	
		SA-9 GASKIN	2080	
		SA-10 GRUMBLE	2081	
		SA-11 GADFLY	2082	
		SA-12	2083	
		SA-13 GOPHER	2084	
		MISTRAL	2085	
		SA-N-7 GADFLY	2086	
		SA-N-8 GREMLIN	2087	
		SA-14 GREMLIN	2088	
		SA-16 GIMLET	2089	
		SA-X-17	2090	
		SA-N-5 GRAIL	2091	
		SA-N-11 GRISOM	2092	
		SA-12A GLADIATOR	2093	
		SA-12B GIANT	2094	
		SA-14 GREMLIN	2095	
		SA-15 GAUNTLET	2096	
		SA-17 GRIZZLY	2097	
		SA-N-12 GRIZZLY	2098	
		SA-18 GROUSE	2099	
		SA-19 GRISOM	2100	
		RIM-116 RAM	2101	
		ADATS	2102	
		JAVELIN	2103	
		STARBURST	2104	

FIELD CODING FOR J7.0C1

(SHEET 27)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		STARSTREAK	2105	
		ASPIDE	2106	
		I-HAWK	2107	
		ROLAND II	2108	
		SM-2 BLOCK II	2109	
		SM-2 BLOCK III	2110	
		SM-2 BLOCK IIIA	2111	
		SM-2 BLOCK IIIB	2112	
		SM-2 BLOCK IV	2113	
		SM-2 BLOCK IVA	2114	
		SM-3 LEAP	2115	
		AKASH	2116	
		ANZA	2117	
		ANZA II	2118	
		CSA-1	2119	
		CSA-2	2120	
		CSA-4	2121	
		CSA-5	2122	
		FM-80	2123	
		HN-5	2124	
		NK-7	2125	
		NK-16	2126	
		PANTZYR	2127	
		RAPIER 2000/JERNAS	2128	
		RBS-90	2129	
		SAKR	2130	
		SAVA	2131	
		SHANINE	2132	
		SKYGUARD ASPIDE	2133	
		SPADA	2134	
		TAM SAM	2135	
		TIGERCAT	2136	
		VANGUARD	2137	
		SA-N-1 GOA	2138	
		SA-N-9 GAUNTLET	2139	
		SA-N-10	2140	
		ALBATROS/ASPIDE	2141	
		SM-1	2142	
		VT1 CROTALE	2143	
		MASURCA	2144	
		ASTER 15	2145	
		ASTER 30	2146	
		UNDEFINED	2147 THROUGH 4093	

FIELD CODING FOR J7.0C1

(SHEET 28)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE -----	(CONTINUED)	
		RESET TO NO STATEMENT	4094	
		SURFACE-TO-AIR MISSILE GENERAL	4095	
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----		THE SPECIFIC TYPE OF POINT OR TRACK WITH AN ENVIRONMENT/CATEGORY OF SURFACE (MARITIME).
		NO STATEMENT	0	
		CV GENERAL	1	
		CLEMENCEAU	2	
		ENTERPRISE	3	
		FORRESTAL	4	
		JOHN F KENNEDY	5	
		KITTY HAWK	6	
		MIDWAY	7	
		NIMITZ	8	
		CHARLES DE GAULLE	9	
		UNDEFINED	10 THROUGH 21	
		CVS GENERAL	22	
		DEDALO	23	
		MINAS GERAIS	24	
		VIKRANT	25	
		VEINTICINCO DE MAYO	26	
		VIRAAT	27	
		UNDEFINED	28 THROUGH 35	
		CVH GENERAL	36	
		GIUSEPPE GARIBALDI	37	
		INVINCIBLE	38	
		JEANNE D'ARC	39	
		KIEV	40	
		PRINCIPE DE ASTURIAS	41	
		UNDEFINED	42	
		KIEV (MODIFIED)	43	
		UNDEFINED	44 THROUGH 52	
		BB GENERAL	53	
		IOWA	54	
		UNDEFINED	55 THROUGH 64	
		CC GENERAL	65	
		SVERDLOV (MODIFIED)	66	
		UNDEFINED	67 THROUGH 76	
		CG GENERAL	77	
		ANDREA DORIA	78	
		BAINBRIDGE	79	

FIELD CODING FOR J7.0C1

(SHEET 29)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		BELKNAP	80	
		CALIFORNIA	81	
		UNDEFINED	82	
		KARA	83	
		KIROV	84	
		KRESTA I	85	
		KRESTA II	86	
		KYNDA	87	
		LEAHY	88	
		LONG BEACH	89	
		SLAVA	90	
		TICONDEROGA	91	
		TRUXTUN	92	
		VIRGINIA	93	
		VITTORIO VENETO	94	
		UNDEFINED	95 THROUGH 118	
		CH GENERAL	119	
		MOSKVA	120	
		UNDEFINED	121 THROUGH 130	
		CA GENERAL	131	
		UNDEFINED	132	
		SVERDLOV	133	
		UNDEFINED	134 THROUGH 143	
		DD GENERAL	144	
		AKIZUKI	145	
		ALLEN M SUMNER	146	
		ALLEN M SUMNER FRAM II	147	
		ALMIRANTE	148	
		AMATSUKAZE	149	
		ANIMOSO	150	
		ANSHAN	151	
		ARLEIGH BURKE	152	
		ASAGARI	153	
		UNDEFINED	154	
		AUDACE	155	
		AYANAMI	156	
		DISUSED	157	
		CARPENTER FRAM I	158	
		CHARLES F ADAMS (MOD)	159	
		CHARLES F ADAMS	160	
		COONTZ	161	
		DISUSED	162 THROUGH 163	

FIELD CODING FOR J7.0C1

(SHEET 30)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		UNDEFINED	164	
		FLETCHER	165	
		FORREST SHERMAN (MOD) & HULL	166	
		FRIESLAND	167	
		GEARING FRAM I	168	
		GEARING FRAM II	169	
		UNDEFINED	170	
		DISUSED	171	
		HARUNA	172	
		HATAKAZE	173	
		HATSUYUKI	174	
		IMPAVIDO	175	
		KANIN	176	
		KASHIN (MODIFIED)	177	
		KASHIN	178	
		KASHIN II	179	
		KIDD	180	
		UNDEFINED	181	
		KILDIN (MODIFIED)	182	
		KOTLIN	183	
		KOTLIN (MODIFIED)	184	
		LUDA (TYPE 051)	185	
		MEKO 360	186	
		MINEGUMO	187	
		PROJECT 15	188	
		ROBERT H SMITH	189	
		ROGER D LAURIA	190	
		SAM KOTLIN	191	
		SHIRANE	192	
		SKORY	193	
		SOVREMENNY	194	
		SPRUANCE	195	
		SUFFREN	196	
		TACHIKAZE	197	
		TAKATSUKI	198	
		TYPE 42	199	
		DISUSED	200	
		DISUSED	201	
		TYPE F-70 (AAW)	202	
		TYPE F-70 (ASW)	203	
		TYPE F-67	204	

FIELD CODING FOR J7.0C1

(SHEET 31)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		UNDEFINED	205 THROUGH 206	
		TYPE T-53 (MODIFIED-ASW)	207	
		UNDEFINED	208	
		UDALOY	209	
		YAMAGUMO	210	
		Z	211	
		IROQUOIS	212	
		UNDEFINED	213 THROUGH 276	
		DE GENERAL	277	
		UNDEFINED	278	
		CASTLE	279	
		UNDEFINED	280 THROUGH 295	
		FF GENERAL	296	
		ALMIRANTE CLEMENTE	297	
		ALMIRANTE PEREIRA DA SILVA	298	
		ALPINO	299	
		DISUSED	300 THROUGH 301	
		BALEARES	302	
		BAPTISTA DE ANDRADE	303	
		UNDEFINED	304	
		BERK	305	
		BLACK SWAN	306	
		BROADSWORD (TYPE 22)	307	
		BRONSTEIN	308	
		BROOKE	309	
		CANNON	310	
		CHARLES LAWRENCE	311	
		CHENGDU	312	
		CHIKUGO	313	
		COMANDANTE JOAO BELO	314	
		UNDEFINED	315	
		CROSLEY	316	
		DEALEY	317	
		DESCUBIERTA	318	
		DUKE (TYPE 23)	319	
		DURANGO	320	
		EDSALL	321	
		GARCIA	322	
		GLOVER	323	
		GODAVARI	324	
		GRISHA I	325	

FIELD CODING FOR J7.0C1

(SHEET 32)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		GRISHA II	326	
		GRISHA III	327	
		UNDEFINED	328	
		GRISHA V	329	
		UNDEFINED	330	
		HVIDBJORNEN	331	
		ISHKARI	332	
		ISUZU	333	
		JACOB VAN HEEMSKERCK	334	
		JIANGDONG (TYPE 053J)	335	
		JIANGHU (TYPE 053H)	336	
		JIANGNAN	337	
		JOAO COUTINHO	338	
		KAREL DOORMAN	339	
		KNOX	340	
		DISUSED	341	
		KONI	342	
		KORTENAER	343	
		KRIVAK I	344	
		KRIVAK II	345	
		KRIVAK III	346	
		LA FAYETTE	347	
		DISUSED	348	
		LEOPARD	349	
		LUPU	350	
		M	351	
		DISUSED	352	
		MAESTRALE	353	
		MEKO 140 TYPE	354	
		MEKO 200 TYPE	355	
		MIRKA I	356	
		MIRKA II	357	
		NIELS JUEL	358	
		NITEROI	359	
		OLIVER HAZARD PERRY	360	
		OSLO	361	
		PEDER SKRAM	362	
		PETYA I (MODIFIED)	363	
		PETYA I	364	
		PETYA II (MODIFIED)	365	
		PETYA II	366	
		PETYA III	367	

FIELD CODING FOR J7.0C1

(SHEET 33)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		UNDEFINED	368	
		DISUSED	369	
		RIGA	370	
		RIVER	371	
		BRANDENBURG (TYPE 123)	372	
		RUDDEROW	373	
		SACHSEN (TYPE 124)	374	
		SAVAGE	375	
		DISUSED	376	
		TROMP	377	
		TYPE A 69	378	
		TYPE F-2000S	379	
		UNDEFINED	380 THROUGH 381	
		YUBARI	382	
		BREMEN (TYPE 122)	383	
		CLAUDE JONES	384	
		FFG 7	385	
		HALIFAX	386	
		NAJIN	387	
		PRESIDENT	388	
		SANTA MARIA	389	
		VOSPER MK 5	390	
		VOSPERTHORNYCROFT MK 7	391	
		WIELINGEN	392	
		FLOREAL	393	
		COMMANDANT BORY	394	
		UNDEFINED	395 THROUGH 478	
		FS GENERAL	479	
		ALBATROS	480	
		AUK CLASS	481	
		DE CRISTOFARO	482	
		DISUSED	483	
		MINERVA	484	
		NANUCHKA I	485	
		NANUCHKA II	486	
		NANUCHKA III	487	
		DISUSED	488	
		PF-103	489	
		SAAR 5	490	
		SLEIPNER	491	
		TARANTUL I	492	
		TARANTUL II	493	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		DISUSED	494	
		WADI	495	
		UNDEFINED	496 THROUGH 517	
		LL GENERAL	518	
		UNDEFINED	519 THROUGH 528	
		LCC GENERAL	529	
		BLUE RIDGE	530	
		CAVEZZALE	531	
		UNDEFINED	532 THROUGH 540	
		LKA GENERAL	541	
		CHARLESTON	542	
		UNDEFINED	543 THROUGH 552	
		LFS GENERAL	553	
		UNDEFINED	554 THROUGH 563	
		LHA GENERAL	564	
		TARAWA	565	
		UNDEFINED	566 THROUGH 575	
		LHD GENERAL	576	
		WASP	577	
		UNDEFINED	578 THROUGH 587	
		LPA GENERAL	588	
		UNDEFINED	589 THROUGH 598	
		LPD GENERAL	599	
		AUSTIN	600	
		FEARLESS	601	
		IVAN ROGOV	602	
		UNDEFINED	603	
		RALEIGH	604	
		SAN GIORGIO	605	
		UNDEFINED	606 THROUGH 615	
		LPH GENERAL	616	
		IWO JIMA	617	
		UNDEFINED	618 THROUGH 627	
		LSD GENERAL	628	
		ANCHORAGE	629	
		ASHLAND	630	
		CABILDO	631	
		OURAGAN	632	
		FOUDRE	633	
		THOMASTON	634	
		WHIDBEY ISLAND	635	
		UNDEFINED	636 THROUGH 646	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		LSL GENERAL	647	
		SIR GERAINT	648	
		UNDEFINED	649 THROUGH 657	
		LSM GENERAL	658	
		ASHDOD	659	
		BATRAL	660	
		CAKABEY	661	
		EDIC I	662	
		EDIC II	663	
		LSM-1	664	
		MP-4	665	
		POLNOCHNY	666	
		POLOCHNY A	667	
		POLOCHNY B	668	
		POLOCHNY C	669	
		POLOCHNY D	670	
		YUDAO	671	
		YULIMG	672	
		BOUGAINVILLE	673	
		UNDEFINED	674 THROUGH 687	
		LST GENERAL	688	
		ALLIGATOR	689	
		ATSUMI	690	
		UNDEFINED	691	
		BROOKE MARINE 93M	692	
		CAKABEY NL-122	693	
		CNIM PS 700	694	
		DE SOTO COUNTY	695	
		DISUSED	696	
		HENGAM	697	
		LST 1-510	698	
		LST 511-1152	699	
		MIURA	700	
		NEWPORT	701	
		ROPUCHA	702	
		SARUCABEY	703	
		CNGF	704	
		OCEAN	705	
		ALBION	706	
		TERREBONNE PARISH	707	
		TOBRUK	708	
		UNDEFINED	709	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		YUKAN	710	
		UNDEFINED	711 THROUGH 730	
		LSV GENERAL	731	
		UNDEFINED	732 THROUGH 741	
		LC GENERAL	742	
		UNDEFINED	743 THROUGH 751	
		LCM GENERAL	752	
		CTM 1	753	
		HUNGNAM	754	
		LCM 1057/1058	755	
		LCM 6	756	
		LCM 8	757	
		T-4	758	
		TSAPLYA	759	
		LCM (TYPE 521)	760	
		UNDEFINED	761 THROUGH 772	
		LCP GENERAL	773	
		DISUSED	774	
		LCM 1031	775	
		LCM 1035/1036	776	
		LCM 1055/1056	777	
		NAMPO	778	
		UNDEFINED	779 THROUGH 788	
		LCPL GENERAL	789	
		UNDEFINED	790 THROUGH 799	
		LWC GENERAL	800	
		UNDEFINED	801 THROUGH 810	
		LCU GENERAL	811	
		BALIKPAPAN	812	
		BOMBARDA	813	
		BRAILA	814	
		LCU (TYPE 520)	815	
		DISUSED	816	
		DISUSED	817	
		DISUSED	818	
		DSM-501	819	
		HANCHON	820	
		HANTAE	821	
		KISHON	822	
		KVALSUND	823	
		LCT MK 5	824	
		LCT MK 6	825	

FIELD CODING FOR J7.0C1

(SHEET 37)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		LCU 501	826	
		MFP D-3	827	
		MZ	828	
		REINOYSUND	829	
		SMB-1	830	
		TU 57-M	831	
		US LCU 1466	832	
		VYDRA	833	
		YURA	834	
		UNDEFINED	835 THROUGH 866	
		LCVP GENERAL	867	
		UNDEFINED	868 THROUGH 877	
		LCAC GENERAL	878	
		AIST	879	
		GUS	880	
		LEBED	881	
		UTENOK	882	
		WELLINGTON BH-7 MK 4	883	
		WELLINGTON BH-7 MK 5	884	
		WINCHESTER (SR.N6)	885	
		UNDEFINED	886 THROUGH 896	
		MM GENERAL	897	
		ALESHA	898	
		ALVSBORG	899	
		BORGEN	900	
		CARLSKRONA	901	
		COSAR	902	
		FALSTER	903	
		FURUSUND (MUL-20)	904	
		LANGELAND	905	
		LINDORMEN	906	
		LSM-1 (MODIFIED)	907	
		MUL-11	908	
		MUL-12	909	
		DISUSED	910	
		SMITH	911	
		US YMP	912	
		VIDAR	913	
		UNDEFINED	914 THROUGH 935	
		MCS GENERAL	936	
		UNDEFINED	937 THROUGH 946	
		MCJ GENERAL	947	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		UNDEFINED	948 THROUGH 957	
		MCD GENERAL	958	
		KINGSTON	959	
		MUEHLHAUSEN MCD (TYPE 742A)	960	
		UNDEFINED	961 THROUGH 968	
		MCM GENERAL	969	
		UNDEFINED	970 THROUGH 979	
		MH GENERAL	980	
		UNDEFINED	981 THROUGH 990	
		MHO GENERAL	991	
		UNDEFINED	992 THROUGH 1001	
		MHC GENERAL	1002	
		ADJUTANT (MODIFIED)	1003	
		AGGRESSIVE	1004	
		CIRCE	1005	
		WEIDEN MHC (TYPE 332)	1006	
		KOBLENZ MHC (TYPE 331B)	1007	
		HAM	1008	
		HUNT	1009	
		LANDSORT	1010	
		LERICI	1011	
		MSC 50	1012	
		MSO 218	1013	
		MSO 503	1014	
		SAUDA	1015	
		SIRIUS	1016	
		DISUSED	1017	
		TRIPARTITE	1018	
		VANYA I	1019	
		SANDOWN (SRMH)	1020	
		UNDEFINED	1021 THROUGH 1029	
		MHSC GENERAL	1030	
		MARS	1031	
		UNDEFINED	1032 THROUGH 1043	
		MHI GENERAL	1044	
		BAY	1045	
		UNDEFINED	1046 THROUGH 1054	
		MHA GENERAL	1055	
		UNDEFINED	1056 THROUGH 1065	
		ML GENERAL	1066	
		UNDEFINED	1067 THROUGH 1076	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		MLC GENERAL	1077	
		CURLEW	1078	
		UNDEFINED	1079 THROUGH 1088	
		MLI GENERAL	1089	
		UNDEFINED	1090 THROUGH 1099	
		MLO GENERAL	1100	
		UNDEFINED	1101 THROUGH 1110	
		MLR GENERAL	1111	
		UNDEFINED	1112 THROUGH 1121	
		MLA GENERAL	1122	
		UNDEFINED	1123 THROUGH 1132	
		MLS GENERAL	1133	
		UNDEFINED	1134 THROUGH 1143	
		MS GENERAL	1144	
		UNDEFINED	1145 THROUGH 1154	
		MSF GENERAL	1155	
		EX-ERIMO	1156	
		K-8	1157	
		KROGULEC	1158	
		M-40	1159	
		MSO-421	1160	
		NATYA I	1161	
		NATYA II	1162	
		RIVER	1163	
		T-43	1164	
		YURKA	1165	
		UNDEFINED	1166 THROUGH 1180	
		MSO GENERAL	1181	
		ACME	1182	
		AGGRESSIVE	1183	
		UNDEFINED	1184 THROUGH 1193	
		MSC GENERAL	1194	
		136 FT	1195	
		ADJUTANT	1196	
		ARKOE	1197	
		BAY	1198	
		DOKKUM	1199	
		HATSUSHIMA	1200	
		HAYASE	1201	
		DISUSED	1202	
		KOUZJ	1203	
		LENIWKA	1204	

FIELD CODING FOR J7.0C1

(SHEET 40)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		HAMELN MSC (TYPE 343)	1205	
		MSC 268	1206	
		MSC 292	1207	
		MSC 294	1208	
		NOTEC	1209	
		SASHA	1210	
		SAUDA	1211	
		DISUSED	1212	
		DISUSED	1213	
		SONYA	1214	
		T-301	1215	
		T-43	1216	
		TAKAMI	1217	
		DISUSED	1218	
		VANYA	1219	
		VANYA I	1220	
		VANYA II	1221	
		WUSONG	1222	
		ZHENYA	1223	
		UNDEFINED	1224 THROUGH 1263	
		MSI GENERAL	1264	
		DISUSED	1265	
		AUX MINESWEEPER NO 1	1266	
		CAPE	1267	
		FRAUENLOB (TYPE 394)	1268	
		HAM	1269	
		HERSTAL	1270	
		KIISKI	1271	
		KUHA	1272	
		M-111	1273	
		M-15	1274	
		M-31	1275	
		M-43/47	1276	
		PIPA-A	1277	
		WOCHANG	1278	
		YEVGENYA	1279	
		YUKTO	1280	
		UNDEFINED	1281 THROUGH 1302	
		MSR GENERAL	1303	
		UNDEFINED	1304 THROUGH 1313	
		MSB GENERAL	1314	
		K-8	1315	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		N-300	1316	
		NESTIN	1317	
		NØ. 7	1318	
		OLYA	1319	
		PO-2	1320	
		TR-40	1321	
		VD-141	1322	
		VULCAIN	1323	
		STYX	1324	
		PLUTON	1325	
		ACHERON	1326	
		UNDEFINED	1327 THROUGH 1334	
		MSA GENERAL	1335	
		UNDEFINED	1336 THROUGH 1345	
		MSD GENERAL	1346	
		HFG-1 (TROIKA)	1347	
		ILYUSHA	1348	
		UNDEFINED	1349 THROUGH 1358	
		MCSD GENERAL	1359	
		UNDEFINED	1360 THROUGH 1369	
		MSS GENERAL	1370	
		ANDRYUSHA	1371	
		BALTIKA	1372	
		POLNOCNY	1373	
		UNDEFINED	1374 THROUGH 1383	
		MSH GENERAL	1384	
		UNDEFINED	1385 THROUGH 1394	
		MSO GENERAL	1395	
		BERLAIMONT (MODIFIED)	1396	
		UNDEFINED	1397 THROUGH 1405	
		MSHC GENERAL	1406	
		HUNT	1407	
		TRIPARTITE	1408	
		WILTON	1409	
		UNDEFINED	1410 THROUGH 1419	
		PP GENERAL	1420	
		AB 25	1421	
		UNDEFINED	1422	
		BALDER	1423	
		CASTLE	1424	
		ISLAND	1425	
		KRONSHTADT	1426	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		PC-1638	1427	
		UNDEFINED	1428	THROUGH 1438
		PG GENERAL	1439	
		BESKYTTEVREN	1440	
		BIHORO	1441	
		ERIMO	1442	
		DISUSED	1443	
		HVIDBJOERNEN	1444	
		IZU	1445	
		KOJIMA	1446	
		UNDEFINED	1447	
		NOJIMA	1448	
		PAUK	1449	
		PEACOCK	1450	
		POTI	1451	
		SAVAGE	1452	
		SHIRETOKO	1453	
		SOYA	1454	
		TACOMA	1455	
		LEOPARD (TYPE 148)	1456	
		BAMBU	1457	
		CASSIOPEA	1458	
		UNDEFINED	1459	THROUGH 1480
		PGS GENERAL	1481	
		UNDEFINED	1482	THROUGH 1491
		PGB GENERAL	1492	
		UNDEFINED	1493	THROUGH 1502
		PGF GENERAL	1503	
		ALBATROS (TYPE 143)	1504	
		ASHEVILLE	1505	
		BARNEGAT	1506	
		CHONGJU	1507	
		GEPARD (TYPE 143A)	1508	
		HOUKU	1509	
		IVANSUSANIN	1510	
		KAMAN	1511	
		KARTAL	1512	
		KOMAR	1513	
		LA COMBATTANTE II	1514	
		LA COMBATTANTE III	1515	
		LURSSSEN FPB 57 TYPE	1516	
		OKHTENSKIY	1517	

FIELD CODING FOR J7.0C1

(SHEET 43)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		OSA I	1518	
		OSA II	1519	
		P-4	1520	
		PURGA	1521	
		SAAR 2	1522	
		SAAR 3	1523	
		SAAR 4	1524	
		SAAR 5	1525	
		SARIWON	1526	
		SNOEGG	1527	
		SOHUNG	1528	
		SOJU	1529	
		SORUM	1530	
		STORM	1531	
		T	1532	
		T-43	1533	
		T-58	1534	
		VOSPER 100-FT	1535	
		VOSPER BRAVE	1536	
		WILLEMOES	1537	
		UNDEFINED	1538 THROUGH 1583	
		PC GENERAL	1584	
		ADMIRABLE	1585	
		AGDLEK	1586	
		AKIZUKI	1587	
		ATTACK	1588	
		BAY	1589	
		DISUSED	1590	
		BROOKE MARINE 108-FT	1591	
		CACINE	1592	
		CHONGJU	1593	
		DAPHNE	1594	
		GDANSK	1595	
		HAIKOU	1596	
		HAINAN	1597	
		HANOE	1598	
		K-48	1599	
		KRALJEVICA	1600	
		KRONSHADT	1601	
		LAKE	1602	
		MAGAEN	1603	
		MATSUNAMI	1604	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		MIZUTORI	1605	
		MURAKUMO	1606	
		OBLUZE	1607	
		PGM 71	1608	
		SDB MK II	1609	
		SDB MK III	1610	
		SEAFORTH	1611	
		SHANGHAI	1612	
		SHANGHAI II	1613	
		SHANGHAI II (MODIFIED)	1614	
		SHIKINAMI	1615	
		SO-1	1616	
		SOMAN	1617	
		STENKA	1618	
		T-58	1619	
		TAECHONG	1620	
		UK FORD	1621	
		UMIGIRI	1622	
		US 110-FT	1623	
		US 173-FT	1624	
		UNDEFINED	1625	
		ARCHER	1626	
		ATTACKER	1627	
		23M PC (MANLY)	1628	
		UNDEFINED	1629	THROUGH 1681
		PCF GENERAL	1682	
		BABOCHKA	1683	
		MURAVEY	1684	
		POTI	1685	
		SO-1 (MODIFIED)	1686	
		UNDEFINED	1687	THROUGH 1696
		PCE GENERAL	1697	
		UNDEFINED	1698	THROUGH 1707
		PB GENERAL	1708	
		AKAGI	1709	
		AKIZUKI	1710	
		ALBATROZ	1711	
		ATTACK P-90	1712	
		BARSO	1713	
		BAY	1714	
		BIZAN	1715	
		BROOKE MARINE 37.5M	1716	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		CHONGJIN	1717	
		DABUR	1718	
		DALARO	1719	
		DE L'ESTEREL	1720	
		DILOS	1721	
		DOM ALEIXO	1722	
		DISUSED	1723	
		FREMANTLE	1724	
		GOULANDRIS	1725	
		GUANABACOA	1726	
		HAMAGIRI	1727	
		HAMELIN 37M	1728	
		HIDAKA	1729	
		HUANGPU	1730	
		INTERCEPTOR MK II	1731	
		KIMJIN 67-FT	1732	
		MATSUNAMI	1733	
		MURAKUMO	1734	
		OIRASE	1735	
		P 400	1736	
		P-6	1737	
		PANAGOPOULOS	1738	
		PATRA	1739	
		PBR MK II	1740	
		PBR MK III	1741	
		PGM 71	1742	
		PO-2	1743	
		POLISH K-8	1744	
		POLUCHAT I	1745	
		SHANTOU	1746	
		SHIKINAMI	1747	
		SINHUNG 72-FT	1748	
		SKANOER	1749	
		SOYA/TSUGARU	1750	
		SPEAR	1751	
		STEWART 85-FT	1752	
		SWATOW	1753	
		SWIFT	1754	
		TAISHAN	1755	
		TESHIO	1756	
		TRACKER II	1757	
		US 110-FT	1758	

FIELD CODING FOR J7.0C1

(SHEET 46)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		US ARMY 2001 65-FT	1759	
		USCG 83-FT	1760	
		VEDETTE 28 92-FT	1761	
		VIKRAM	1762	
		VOSPER 70-FT	1763	
		YAMAYURI	1764	
		ZHUK	1765	
		SNOEGG	1766	
		MARS	1767	
		TRIDENT	1768	
		UNDEFINED	1769 THROUGH 1842	
		PBF GENERAL	1843	
		CHAO (CHODO)	1844	
		DE L'ESTEREL	1845	
		GIRNE	1846	
		HAUK	1847	
		HUGIN	1848	
		SLEPEN	1849	
		UNDEFINED	1850	
		SPICA II	1851	
		MARS	1852	
		UNDEFINED	1853 THROUGH 1863	
		PBS GENERAL	1864	
		UNDEFINED	1865 THROUGH 1874	
		PBR GENERAL	1875	
		LEIE	1876	
		PIYAVKA	1877	
		SHMEL	1878	
		VOSH	1879	
		YATUSH	1880	
		YAZ	1881	
		UNDEFINED	1882 THROUGH 1891	
		PT GENERAL	1892	
		AN JU	1893	
		EPITROP	1894	
		HIGGINS 78-FT	1895	
		HUCHUAN PTH-	1896	
		HUZHOU	1897	
		IWON	1898	
		DISUSED	1899	
		KU SONG	1900	
		NO. 11	1901	

FIELD CODING FOR J7.0C1

(SHEET 47)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		P-4	1902	
		P-6	1903	
		PILICA	1904	
		SHERSHEN	1905	
		SIN HUNG	1906	
		SIN NAM	1907	
		SINPO	1908	
		SOLOVEN	1909	
		SPICA	1910	
		TJELD	1911	
		WISLA	1912	
		DISUSED	1913	
		SHANGDONG	1914	
		TURYA	1915	
		UNDEFINED	1916 THROUGH 2047	
		PHM GENERAL	2048	
		MATKA	2049	
		PEGASUS	2050	
		SARANCHA	2051	
		SHIMRIT	2052	
		SPARVIERO	2053	
		UNDEFINED	2054 THROUGH 2063	
		BM GENERAL	2064	
		UNDEFINED	2065 THROUGH 2074	
		BMR GENERAL	2075	
		UNDEFINED	2076 THROUGH 2085	
		SWCL GENERAL	2086	
		UNDEFINED	2087 THROUGH 2096	
		AA GENERAL	2097	
		UNDEFINED	2098 THROUGH 2107	
		AG GENERAL	2108	
		ADOLF	2109	
		AKIZUKI	2110	
		ANGARA	2111	
		ARGO	2112	
		AYANAMI	2113	
		DISUSED	2114 THROUGH 2115	
		CHAMOIS	2116	
		CHIHAYA	2117	
		DALDYN	2118	
		DISUSED	2119	
		DINGHAI	2120	

FIELD CODING FOR J7.0C1

(SHEET 48)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		ENDURANCE	2121	
		EXPLORER	2122	
		DISUSED	2123	
		FRIPONNE	2124	
		GALEB	2125	
		UNDEFINED	2126	
		HAM	2127	
		DISUSED	2128	
		HAYABUSA	2129	
		DISUSED	2130	
		ISLES	2131	
		KEYLA	2132	
		KURIHAMA	2133	
		L ' ARCHEONAUTE	2134	
		L ' ATHOS	2135	
		UNDEFINED	2136	
		LENTRA	2137	
		LIANYUN	2138	
		LSIL	2139	
		MIZUTORI	2140	
		MP - 2	2141	
		MP - 8	2142	
		MURASAME	2143	
		NEFTEGAZ	2144	
		NØ . 81	2145	
		NORGE	2146	
		OHRE	2147	
		ONEGA	2148	
		DISUSED	2149	
		POSEIDON	2150	
		PS - 10	2151	
		RARI	2152	
		RHIN	2153	
		SABAC	2154	
		SHAHSAVAR	2155	
		ST . LYKODIS	2156	
		STALWART	2157	
		T - 43	2158	
		TAPATAI	2159	
		TAPPE	2160	
		THULE	2161	
		TOMBA	2162	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		TSUGARU	2163	
		UMITAKA	2164	
		US 184 FT. PCE	2165	
		US 72 FT. HMDL	2166	
		VANGUARD	2167	
		VIS	2168	
		VYTEGRALES	2169	
		WHISKEY	2170	
		WILHELM PULLWER (TYPE 741)	2171	
		PELIKAAN	2172	
		RANCE	2173	
		MERCURE	2174	
		STERNE	2175	
		ALBATROS	2176	
		PHENIX	2177	
		UNDEFINED	2178 THROUGH 2256	
		ARV GENERAL	2257	
		ARGUS	2258	
		ENGADINE	2259	
		RELIANT	2260	
		UNDEFINED	2261 THROUGH 2270	
		AVT GENERAL	2271	
		LEXINGTON	2272	
		UNDEFINED	2273 THROUGH 2282	
		AE GENERAL	2283	
		EVROS	2284	
		DISUSED	2285	
		KILAUEA	2286	
		NITRO	2287	
		REGENT	2288	
		SURIBACHI	2289	
		WESTERWALD (TYPE 760)	2290	
		UNDEFINED	2291 THROUGH 2301	
		AEL GENERAL	2302	
		UNDEFINED	2303 THROUGH 2312	
		AET GENERAL	2313	
		UNDEFINED	2314 THROUGH 2323	
		AETL GENERAL	2324	
		UNDEFINED	2325 THROUGH 2334	
		AGF GENERAL	2335	
		ABDIEL	2336	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		CORONADO	2337	
		GODETIA	2338	
		LA SALLE	2339	
		DISUSED	2340	
		ZINNIA	2341	
		ELBE (TYPE 404)	2342	
		UNDEFINED	2343	THROUGH 2351
		ACM GENERAL	2352	
		UNDEFINED	2353	THROUGH 2362
		APB GENERAL	2363	
		MICHELANGELO	2364	
		UNDEFINED	2365	THROUGH 2374
		ABU GENERAL	2375	
		CARDENAS	2376	
		FINIK I	2377	
		KARPF II	2378	
		SKB 64	2379	
		YANTAI	2380	
		YANNAN	2381	
		YANGUAN	2382	
		TIANEE	2383	
		LA PRUDENTE	2384	
		UNDEFINED	2385	THROUGH 2395
		ABUD GENERAL	2396	
		UNDEFINED	2397	THROUGH 2406
		ANL GENERAL	2407	
		UNDEFINED	2408	THROUGH 2417
		ARC GENERAL	2418	
		EMBA I	2419	
		EMBA II	2420	
		KALAR	2421	
		KLASMA	2422	
		MP-2	2423	
		NEPTUNE	2424	
		TELNOVSK (MODIFIED)	2425	
		YOUDIAN	2426	
		ZEUS	2427	
		UNDEFINED	2428	THROUGH 2440
		AK GENERAL	2441	
		2ND LT JOHN P BOBO	2442	
		ALCHIBA	2443	
		AMGUEMA	2444	

FIELD CODING FOR J7.0C1

(SHEET 51)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		ANDIZHAN	2445	
		ANDONG	2446	
		ANDROMEDA (CONVERTED)	2447	
		DISUSED	2448	
		BARRICADE	2449	
		BITTERBUSH	2450	
		C3-S-33A TYPE	2451	
		(CONVERTED)		
		C4-S-66A TYPE	2452	
		C4-S-69B TYPE	2453	
		C4-S-A3 TYPE	2454	
		C5-S-75A TYPE	2455	
		CHULYM	2456	
		CPL LOUIS J HAUGE JR	2457	
		DINGHAI	2458	
		DONBA SS	2459	
		FS DESIGN 330	2460	
		GALATI	2461	
		HONGQI	2462	
		ISLES	2463	
		KANARYA	2464	
		KOLOMNA	2465	
		LENINGRADSKY KOMSOMOLETS	2466	
		LSIL	2467	
		NEON ANTONOV	2468	
		NORWALK	2469	
		PT-61	2470	
		SGT MATEJ KOCAK	2471	
		THROSK	2472	
		TREE	2473	
		YANHANG	2474	
		YUNYY PARTIZAN	2475	
		UNDEFINED	2476 THROUGH 2521	
		AKL GENERAL	2522	
		ELTANIN	2523	
		KEYLA	2524	
		UNDEFINED	2525	
		LENTRA	2526	
		UNDEFINED	2527	
		MP 4	2528	
		MP 6	2529	
		MUNA	2530	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		SEKSTAN	2531	
		TELNOVSK	2532	
		WISTING	2533	
		GORGONA	2534	
		UNDEFINED	2535 THROUGH 2549	
		AKR GENERAL	2550	
		ALGOL (SL 7)	2551	
		CALLAGHAN	2552	
		COMET	2553	
		METEOR	2554	
		DISUSED	2555	
		MAINE (CONVERTED)	2556	
		UNDEFINED	2557 THROUGH 2566	
		AFS GENERAL	2567	
		FORT	2568	
		UNDEFINED	2569	
		MARS	2570	
		RESOURCE	2571	
		UNDEFINED	2572 THROUGH 2580	
		AOE GENERAL	2581	
		SACRAMENTO	2582	
		SAGAMI	2583	
		UNDEFINED	2584 THROUGH 2593	
		AD GENERAL	2594	
		YELLOWSTONE	2595	
		SAMUEL GOMPERS	2596	
		DIXIE	2597	
		STALWART	2598	
		UNDEFINED	2599 THROUGH 2608	
		AWW GENERAL	2609	
		UNDEFINED	2610 THROUGH 2619	
		AH GENERAL	2620	
		HAVEN	2621	
		OB	2622	
		DISUSED	2623	
		UNDEFINED	2624 THROUGH 2632	
		AGB GENERAL	2633	
		DOBRYNYA NIKITICH	2634	
		HANSE	2635	
		IVANSUSANIN	2636	
		SHIRASE	2637	
		YANHA	2638	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		UNDEFINED	2639 THROUGH 2648	
		AGBL GENERAL	2649	
		EISVOGEL (TYPE 721)	2650	
		DISUSED	2651	
		UNDEFINED	2652 THROUGH 2661	
		AGI GENERAL	2662	
		ALPINIST	2663	
		ARMINZA	2664	
		UNDEFINED	2665	
		BALZAM	2666	
		BOLOGOE	2667	
		DISUSED	2668	
		HAM	2669	
		DISUSED	2670	
		DISUSED	2671	
		LENTA	2672	
		MAYAK	2673	
		MIRNY	2674	
		MOMA	2675	
		NIKOLAY ZUBOV	2676	
		OKEAN	2677	
		DISUSED	2678	
		PAMIR	2679	
		PRIMORYE	2680	
		ALSTER (TYPE 423)	2681	
		UNDEFINED	2682 THROUGH 2705	
		ALS GENERAL	2706	
		UNDEFINED	2707 THROUGH 2716	
		AEM GENERAL	2717	
		AMGA	2718	
		ANDIZHAN (MODIFIED)	2719	
		LAMA	2720	
		MALINA	2721	
		MELITOPOL	2722	
		MP 6	2723	
		UNDEFINED	2724 THROUGH 2733	
		AGM GENERAL	2734	
		AGM-24	2735	
		GEN HOYT S VANDENBERG	2736	
		OBSERVATION ISLAND	2737	
		RANGE SENTINEL	2738	
		(HASKELL TYPE)		

FIELD CODING FOR J7.0C1

(SHEET 54)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		REDSTONE	2739	
		UNDEFINED	2740 THROUGH 2749	
		AGOR GENERAL	2750	
		ABKHAZIYA	2751	
		AKADEMIK KRYLOV	2752	
		ARAD	2753	
		BALIKPAPAN	2754	
		BELGICA	2755	
		DISUSED	2756	
		COOK	2757	
		D'ENTRECASTEAUX	2758	
		DOBRYNYA NIKITICH	2759	
		DONG MING	2760	
		ELTANIN	2761	
		ENDEAVOR	2762	
		FRANCESCO NULLO	2763	
		DISUSED	2764	
		GRIGORE ANTIPA	2765	
		GYRE	2766	
		HAYES	2767	
		HECLA	2768	
		MELVILLE	2769	
		MSC 60	2770	
		NAUTILUS	2771	
		NEVELSKOY	2772	
		NIKOLAY ZUBOV	2773	
		PITHEAS	2774	
		POLYUS	2775	
		QUEST	2776	
		ROBERT D CONRAD	2777	
		T-43	2778	
		TRITON	2779	
		TUI	2780	
		TYDEMAN	2781	
		XIANG YANG HONG	2782	
		YANLUN	2783	
		YUG	2784	
		ZENOBE GRAMME	2785	
		MAYAK	2786	
		UNDEFINED	2787 THROUGH 2823	
		AGOB GENERAL	2824	
		POLARSTERN	2825	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		UNDEFINED	2826 THROUGH 2835	
		AGOS GENERAL	2836	
		UNDEFINED	2837 THROUGH 2845	
		AO GENERAL	2846	
		UNDEFINED	2847	
		AKAR	2848	
		ALBAY BURBAK	2849	
		ALTAY	2850	
		UNDEFINED	2851	
		BASKUNCHAK	2852	
		BAYLEAF	2853	
		BINBASI GURGAN	2854	
		DISUSED	2855	
		CIMARRON	2856	
		CIMARRON (JUMBOISED)	2857	
		DORA	2858	
		HAMANA	2859	
		DISUSED	2860	
		DISUSED	2861	
		HENRY J KAISER	2862	
		IRTYSH	2863	
		KALININGRADNEFT	2864	
		KHOBİ	2865	
		KONDA	2866	
		METTAWEE	2867	
		MISPILLION (JUMBOISED)	2868	
		MOSKIT	2869	
		NEOSHO	2870	
		NERCHA	2871	
		NORWEGIAN BOW	2872	
		OLEKMA	2873	
		PATAPSCO	2874	
		PEVEK	2875	
		UNDEFINED	2876	
		SOFIYA	2877	
		SPESSART (TYPE 704A)	2878	
		TASKIZAK	2879	
		USEDOM	2880	
		WALCHENSEE (TYPE 703)	2881	
		WAVE	2882	
		DISUSED	2883	
		YUZBASI TOLUNAY	2884	

FIELD CODING FOR J7.0C1

(SHEET 56)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		BRAMBLELEAF	2885	
		UNDEFINED	2886 THROUGH 2936	
		AOT GENERAL	2937	
		AMERICAN EXPLORER	2938	
		AOTL	2939	
		EBANOL	2940	
		FULIN	2941	
		FUZHOU	2942	
		GUANZGHOU	2943	
		LEIZHOU	2944	
		MAUMEE	2945	
		METTAWEE	2946	
		MISSION	2947	
		POTOMOC	2948	
		SEALIFT	2949	
		SUAMICO	2950	
		T 5 TYPE	2951	
		TM2	2952	
		PORT VENDRES	2953	
		UNDEFINED	2954 THROUGH 2973	
		AOTL GENERAL	2974	
		DISUSED	2975	
		KH0BI	2976	
		UNDEFINED	2977 THROUGH 2986	
		AOR GENERAL	2987	
		BANDAR ABBAS	2988	
		BEREZINA	2989	
		BORIS CHILIKIN	2990	
		CAPITAN OLA PANTOJA	2991	
		DEEPAK	2992	
		DUBNA	2993	
		DURANCE	2994	
		FUQING	2995	
		KAZBEK	2996	
		KHARG	2997	
		MEERSBURG (TYPE 701C)	2998	
		MESAR	2999	
		OLWEN	3000	
		POOLSTER	3001	
		POLYARNIK	3002	
		PROTECTEUR	3003	
		PROVIDER	3004	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		ROVER	3005	
		SAO GABRIEL	3006	
		STROMBOLI	3007	
		TIDE (IMPROVED)	3008	
		UDA	3009	
		WICHITA	3010	
		FORT VICTORIA	3011	
		BERLIN (TYPE 702C)	3012	
		UNDEFINED	3013	THROUGH 3042
		AORL GENERAL	3043	
		LEIZHOU	3044	
		UNDEFINED	3045	THROUGH 3054
		AOL GENERAL	3055	
		PUNARUU	3056	
		UNDEFINED	3057	THROUGH 3065
		AGP GENERAL	3066	
		GRAHAM COUNTY	3067	
		NORGE	3068	
		DISUSED	3069	
		MERCUUR	3070	
		UNDEFINED	3071	THROUGH 3079
		AP GENERAL	3080	
		MIKHAIL KALININ	3081	
		PANDORA	3082	
		QIONGSHA	3083	
		UNDEFINED	3084	THROUGH 3093
		AGR GENERAL	3094	
		UNDEFINED	3095	THROUGH 3104
		AOSR GENERAL	3105	
		UNDEFINED	3106	THROUGH 3115
		AR GENERAL	3116	
		ACHELOUS	3117	
		AJAX	3118	
		AMPHION	3119	
		AMUR	3120	
		ARL I	3121	
		DALIANG	3122	
		DILIGENCE	3123	
		DIXIE	3124	
		JULES VERNE	3125	
		OSKOL	3126	
		RHIN	3127	

FIELD CODING FOR J7.0C1

(SHEET 58)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		STALWART	3128	
		UNDEFINED	3129 THROUGH 3145	
		ARL GENERAL	3146	
		ARCHELOUS	3147	
		UNDEFINED	3148 THROUGH 3157	
		AGE GENERAL	3158	
		BELGICA	3159	
		BERRY	3160	
		UNDEFINED	3161	
		COMMANDANT RIVIERE	3162	
		DESNAL	3163	
		DOBRYNYA NIKITICH	3164	
		EF 3	3165	
		HENRI POINCARE	3166	
		ILE D'OLERON	3167	
		IVANSUSANIN	3168	
		KOLOMNA	3169	
		LENTRA	3170	
		MARSHAL NEDELIN	3171	
		MOMA	3172	
		MP-8	3173	
		MUNA	3174	
		NARVIK	3175	
		OS-3	3176	
		POINT LOMA	3177	
		POTOK	3178	
		QUARTO	3179	
		SASHA	3180	
		SIBIR	3181	
		SO-1	3182	
		T-43	3183	
		TRITON	3184	
		DISUSED	3185	
		YAL 01	3186	
		YANXI	3187	
		ROSSETTI	3188	
		DENTI	3189	
		MONGE	3190	
		UNDEFINED	3191 THROUGH 3227	
		ARS GENERAL	3228	
		BOLSTER	3229	
		DISUSED	3230	

FIELD CODING FOR J7.0C1

(SHEET 59)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		INGUL	3231	
		KATUN I	3232	
		KATUN II	3233	
		KOWAN	3234	
		LSIL 351	3235	
		MIKHAIL RUDNITSKY	3236	
		OREL	3237	
		PAMIR	3238	
		PIAST	3239	
		PROTEO	3240	
		PS-11	3241	
		SAFEGUARD	3242	
		SILVA	3243	
		SPASILAC	3244	
		DISUSED	3245	
		US 149 FT	3246	
		YANDING	3247	
		UNDEFINED	3248 THROUGH 3273	
		ARSD GENERAL	3274	
		UNDEFINED	3275 THROUGH 3284	
		ASVR GENERAL	3285	
		UNDEFINED	3286 THROUGH 3295	
		AOS GENERAL	3296	
		ALATNA	3297	
		LUZA	3298	
		URAL	3299	
		VALA	3300	
		TONTI	3301	
		UNDEFINED	3302 THROUGH 3311	
		AF GENERAL	3312	
		CROITOR	3313	
		DANLIN	3314	
		MAYAK	3315	
		RIEGEL	3316	
		UNDEFINED	3317 THROUGH 3326	
		AKS GENERAL	3327	
		UNDEFINED	3328 THROUGH 3337	
		AKSL GENERAL	3338	
		UNDEFINED	3339 THROUGH 3348	
		AFL GENERAL	3349	
		UNDEFINED	3350 THROUGH 3359	
		ASR GENERAL	3360	

FIELD CODING FOR J7.0C1

(SHEET 60)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		ANTEO	3361	
		CHANTICLEER	3362	
		DAHIANG	3363	
		DALANG	3364	
		ELBRUS	3365	
		FEHMARN (TYPE 720B)	3366	
		FUSHIMI	3367	
		GALATI	3368	
		HUDONG	3369	
		KURTARAN	3370	
		NEPA	3371	
		PIGEON	3372	
		PRUT	3373	
		ROSLAVL	3374	
		SPASILAC	3375	
		VALDAY	3376	
		ZHONGHUA	3377	
		UNDEFINED	3378 THROUGH 3401	
		AS GENERAL	3402	
		ACHELOUS	3403	
		AEGIR	3404	
		DISUSED	3405	
		ATREK	3406	
		CHIYODA	3407	
		DADONG	3408	
		DAZHOU	3409	
		DIVER	3410	
		DNEPR	3411	
		DNEPR (MODIFIED)	3412	
		DON	3413	
		EMORY S LAND	3414	
		FULTON	3415	
		HUNLEY	3416	
		L Y SPEAR	3417	
		PROTEUS	3418	
		DISUSED	3419	
		SIMON LAKE	3420	
		UGRA	3421	
		UNDEFINED	3422 THROUGH 3447	
		ASL GENERAL	3448	
		UNDEFINED	3449 THROUGH 3458	
		AGS GENERAL	3459	

FIELD CODING FOR J7.0C1

(SHEET 61)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		AGS 39 CLASS	3460	
		AKASHI	3461	
		ALMEIDA CARVALHO	3462	
		AMMIRAGLIO MAGNAGHI	3463	
		ANDRIJA MOHOROVICIC	3464	
		AUK	3465	
		BIYA	3466	
		BOLOGUE	3467	
		UNDEFINED	3468	
		BUYSKES	3469	
		C4-S-A1 TYPE (CONVERTED)	3470	
		CHAUVENET	3471	
		COOK	3472	
		DING HAI	3473	
		FINIK	3474	
		FS DESIGN 330	3475	
		FUTAMI	3476	
		HAMASHIO	3477	
		HEIYO	3478	
		KAIBOKAN I	3479	
		KAIYO	3480	
		KAMENKA	3481	
		DISUSED	3482	
		UNDEFINED	3483	
		L'ESPERANCE	3484	
		UNDEFINED	3485	
		LENTRA	3486	
		LSIL	3487	
		MEIYO	3488	
		MELITOPOL	3489	
		MOMA	3490	
		MONOWAI	3491	
		MORESBY	3492	
		MP-8	3493	
		MSC-294 (BLUEBIRD)	3494	
		NYRYAT I	3495	
		NYRYAT II	3496	
		SAMARA	3497	
		SHOYO	3498	
		SILAS BENT	3499	
		STERNE	3500	
		SUMA	3501	

FIELD CODING FOR J7.0C1

(SHEET 62)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		T-43	3502	
		TAKUYO	3503	
		TELNOVSK	3504	
		TELNOVSK (MODIFIED)	3505	
		TENYO	3506	
		VICTORY (CONVERTED)	3507	
		WILKES	3508	
		YANLAI	3509	
		YANXU	3510	
		MIRTO	3511	
		MARS	3512	
		LAPEROUSE	3513	
		UNDEFINED	3514 THROUGH 3579	
		AGSA GENERAL	3580	
		UNDEFINED	3581 THROUGH 3590	
		AGSC GENERAL	3591	
		EXPLORER	3592	
		FLINDERS	3593	
		TAINO	3594	
		BULLDOG	3595	
		ROEBUCK	3596	
		UNDEFINED	3597 THROUGH 3604	
		AX GENERAL	3605	
		ARIS	3606	
		DISUSED	3607	
		JADRAN	3608	
		JERVIS BAY	3609	
		JOSE MARTI	3610	
		MP-8	3611	
		SMOLNY	3612	
		UGRA	3613	
		VIETNAM HEROICO	3614	
		WODNIK	3615	
		UNDEFINED	3616 THROUGH 3630	
		AXL GENERAL	3631	
		UNDEFINED	3632	
		LEOPARD	3633	
		MAYAK	3634	
		UNDEFINED	3635 THROUGH 3642	
		AXS GENERAL	3643	
		AMERIGO VESPUCCI	3644	
		CAROLY	3645	

FIELD CODING FOR J7.0C1

(SHEET 63)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		CARSARO II	3646	
		GORCH FOCK (TYPE 441A)	3647	
		MIRCEA	3648	
		PALINURO	3649	
		SAGRES	3650	
		STELLA POLARE	3651	
		UNDEFINED	3652	THROUGH 3659
		AT GENERAL	3660	
		UNDEFINED	3661	THROUGH 3665
		ATA GENERAL	3666	
		ABNAKI	3667	
		APACHE	3668	
		ARMY 254	3669	
		ATAK	3670	
		ATLANTE	3671	
		AZUMA	3672	
		BELIER	3673	
		UNDEFINED	3674	
		GAJ	3675	
		GNIEWKO	3676	
		GORYN	3677	
		GROMOVOY	3678	
		KUDRET	3679	
		MAITO	3680	
		MB-31	3681	
		MB-65	3682	
		MOTYL	3683	
		OKHTENSKIY	3684	
		ONCU	3685	
		POWHATAN	3686	
		ROSLAVL	3687	
		ROYSTERER	3688	
		SAINT	3689	
		SCHULTZ XAVIER	3690	
		SORUM	3691	
		TENACE	3692	
		TUZHONG	3693	
		TYPHOON	3694	
		WANGER00GE (TYPE 722B)	3695	
		ZENIT	3696	
		MAITO	3697	
		ARMEN	3698	

FIELD CODING FOR J7.0C1

(SHEET 64)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		UNDEFINED	3699 THROUGH 3737	
		ATR GENERAL	3738	
		TENACE	3739	
		UNDEFINED	3740 THROUGH 3748	
		ATS GENERAL	3749	
		EDENTON	3750	
		OKHTENSKY	3751	
		LANGEOOG (TYPE 754)	3752	
		ARGUS	3753	
		UNDEFINED	3754 THROUGH 3762	
		AWT GENERAL	3763	
		UNDEFINED	3764	
		BASENTO	3765	
		FUZHOU (MODIFIED)	3766	
		KANGAN	3767	
		LEIZHOU (MODIFIED)	3768	
		LSIL	3769	
		MANYCH	3770	
		MINCIO	3771	
		PIAVE	3772	
		TEVERE	3773	
		ULUBAT	3774	
		VODA	3775	
		YW-83	3776	
		Z	3777	
		UNDEFINED	3778 THROUGH 3797	
		SERVICE CRAFT GENERAL	3798	
		BARGE, GENERAL	3799	
		YO GENERAL	3800	
		YOG GENERAL	3801	
		YHT GENERAL	3802	
		YRNS GENERAL	3803	
		YOS GENERAL	3804	
		YPK GENERAL	3805	
		YRR GENERAL	3806	
		YRB GENERAL	3807	
		YRST GENERAL	3808	
		YOM GENERAL	3809	
		YOSS GENERAL	3810	
		YW GENERAL	3811	
		UNDEFINED	3812 THROUGH 3827	
		YD GENERAL	3828	

FIELD CODING FOR J7.0C1

(SHEET 65)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		YM GENERAL	3829	
		YFD GENERAL	3830	
		YFP GENERAL	3831	
		YGT GENERAL	3832	
		YR GENERAL	3833	
		UNDEFINED	3834 THROUGH 3840	
		YFD GENERAL	3841	
		YFDB GENERAL	3842	
		YFDM GENERAL	3843	
		YFDL GENERAL	3844	
		UNDEFINED	3845 THROUGH 3850	
		YRD GENERAL	3851	
		YRDB GENERAL	3852	
		YRDM GENERAL	3853	
		YRDL GENERAL	3854	
		UNDEFINED	3855 THROUGH 3861	
		LIGHTER GENERAL	3862	
		YE GENERAL	3863	
		YF GENERAL	3864	
		YFC GENERAL	3865	
		YFR GENERAL	3866	
		YC GENERAL	3867	
		YFT GENERAL	3868	
		UNDEFINED	3869 THROUGH 3878	
		YT GENERAL	3879	
		YTB GENERAL	3880	
		YTM GENERAL	3881	
		YTL GENERAL	3882	
		UNDEFINED	3883 THROUGH 3892	
		YAGF GENERAL	3893	
		YAG GENERAL	3894	
		YV GENERAL	3895	
		YNG GENERAL	3896	
		YP GENERAL	3897	
		YFU GENERAL	3898	
		YAM GENERAL	3899	
		YNC GENERAL	3900	
		YLC GENERAL	3901	
		YVS GENERAL	3902	
		YRG GENERAL	3903	
		YAGT GENERAL	3904	
		YPT GENERAL	3905	

FIELD CODING FOR J7.0C1

(SHEET 66)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		YRC GENERAL	3906	
		YDT GENERAL	3907	
		YNT GENERAL	3908	
		YH GENERAL	3909	
		YFB GENERAL	3910	
		YTR GENERAL	3911	
		YFL GENERAL	3912	
		YAC GENERAL	3913	
		YSR GENERAL	3914	
		YSG GENERAL	3915	
		YDG GENERAL	3916	
		KHABAROV	3917	
		UNDEFINED	3918 THROUGH 3936	
		TM GENERAL	3937	
		TMD GENERAL	3938	
		TMB GENERAL	3939	
		TMK GENERAL	3940	
		TMF GENERAL	3941	
		TMC GENERAL	3942	
		TMCS GENERAL	3943	
		TMWW GENERAL	3944	
		TMA GENERAL	3945	
		TMH GENERAL	3946	
		TMGB GENERAL	3947	
		TMI GENERAL	3948	
		TML GENERAL	3949	
		TMOT GENERAL	3950	
		TMM GENERAL	3951	
		TMP GENERAL	3952	
		TMFR GENERAL	3953	
		TMR GENERAL	3954	
		TMOR GENERAL	3955	
		TMOL GENERAL	3956	
		TME GENERAL	3957	
		TMGS GENERAL	3958	
		TMLS GENERAL	3959	
		TMS GENERAL	3960	
		TMOS GENERAL	3961	
		TMO GENERAL	3962	
		TMX GENERAL	3963	
		TMWT GENERAL	3964	
		UNDEFINED	3965 THROUGH 3989	

FIELD CODING FOR J7.0C1

(SHEET 67)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		TMT GENERAL	3990	
		TMTR GENERAL	3991	
		TMTS GENERAL	3992	
		UNDEFINED	3993 THROUGH 4002	
		TU GENERAL	4003	
		TUF GENERAL	4004	
		TUB GENERAL	4005	
		TUI GENERAL	4006	
		TUR GENERAL	4007	
		TUT GENERAL	4008	
		TUS GENERAL	4009	
		TUC GENERAL	4010	
		TUW GENERAL	4011	
		UNDEFINED	4012 THROUGH 4023	
		TJ GENERAL	4024	
		TJF GENERAL	4025	
		TJC GENERAL	4026	
		TJCS GENERAL	4027	
		TJGB GENERAL	4028	
		UNDEFINED	4029 THROUGH 4038	
		TS GENERAL	4039	
		TSG GENERAL	4040	
		TSR GENERAL	4041	
		UNDEFINED	4042 THROUGH 4052	
		MPS GENERAL	4053	
		UNDEFINED	4054 THROUGH 4069	
		SURFACE SPECIFIC TYPE	4070 THROUGH 4094	
		1-25		
		RESET TO NO STATEMENT	4095	

809	001	SUBSURFACE (MARITIME) SPECIFIC TYPE		THE SPECIFIC TYPE OF POINT OR TRACK WITH AN ENVIRONMENT/CATEGORY OF SUBSURFACE (MARITIME).

		NO STATEMENT	0	
		SS GENERAL	1	
		ABTAO SS	2	
		DISUSED	3	
		DISUSED	4	
		UNDEFINED	5	
		DISUSED	6	
		GUPPY II SS	7	
		GUPPY IIA SS	8	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
809	001	SUBSURFACE (MARITIME) SPECIFIC (CONTINUED) TYPE		

		GUPPY III SS	9	
		HAI LUNG SS	10	
		DISUSED	11	
		SAURO (TYPE 1081) SS	12	
		SAURO (IMPROVED) SS	13	
		TANG SS	14	
		TYPE SNA 72 SS	15	
		UZUSHIO SS	16	
		WALRUS SS	17	
		YUUSHIO SS	18	
		UNDEFINED	19	
		DISUSED	20	
		PELOSI SS	21	
		UNDEFINED	22 THROUGH 360	
		SSB GENERAL	361	
		GOLF SSB	362	
		GOLF II SSB	363	
		GOLF III SSB	364	
		GOLF V SSB	365	
		UNDEFINED	366 THROUGH 440	
		SSBN GENERAL	441	
		BENJAMIN FRANKLIN SSBN	442	
		DELTA I SSBN	443	
		DELTA II SSBN	444	
		DELTA III SSBN	445	
		DELTA IV SSBN	446	
		HOTEL III SSBN	447	
		DISUSED	448	
		L'INFLEXIBLE SSBN	449	
		DISUSED	450	
		UNDEFINED	451	
		OHIO SSBN	452	
		RESOLUTION SSBN	453	
		TYPHOON SSBN	454	
		VANGUARD SSBN	455	
		YANKEE SSBN	456	
		YANKEE I SSBN	457	
		YANKEE II SSBN	458	
		XIA SSBN	459	
		LE TERRIBLE SSBN	460	
		UNDEFINED	461 THROUGH 720	
		SSN GENERAL	721	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
809	001	SUBSURFACE (MARITIME) SPECIFIC (CONTINUED)		
		TYPE		

		AKULA SSN	722	
		ALFA SSN	723	
		AMATHEPT SSN	724	
		CHARLIE/VICTOR SSGN/SSN	725	
		CHURCHILL SSN	726	
		ECHO/NOVEMBER SSGN/SSN	727	
		DISUSED	728	
		DISUSED	729	
		HAN SSN	730	
		HOTEL SSN	731	
		LOS ANGELES SSN	732	
		MIKE SSN	733	
		NARWHAL SSN	734	
		DISUSED	735	
		RUBIS SSN	736	
		SEAWOLF SSN	737	
		SIERRA SSN	738	
		DISUSED	739	
		DISUSED	740	
		STURGEON SSN	741	
		SWIFTSURE SSN	742	
		TRAFALGAR SSN	743	
		DISUSED	744	
		VICTOR I SSN	745	
		VICTOR II SSN	746	
		VICTOR III SSN	747	
		YANKEE SSN	748	
		VIRGINIA SSN	749	
		UNDEFINED	750 THROUGH 1200	
		SSG GENERAL	1201	
		JULIETT SSG	1202	
		UNDEFINED	1203 THROUGH 1245	
		SSGN GENERAL	1246	
		CHARLIE I SSGN	1247	
		CHARLIE II SSGN	1248	
		ECHO II SSGN	1249	
		OSCAR SSGN	1250	
		PAPA SSGN	1251	
		UNDEFINED	1252 THROUGH 1345	
		SSK GENERAL	1346	
		AGOSTA SSK	1347	
		UNDEFINED	1348	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
809	001	SUBSURFACE (MARITIME) SPECIFIC (CONTINUED)		
		TYPE		

		FOXTROT SSK	1349	
		HEROJ SSK	1350	
		KILO SSK	1351	
		MING SSK	1352	
		NARVAL SSK	1353	
		DISUSED	1354 THROUGH 1355	
		ROMEO SSK	1356	
		SAVA SSK	1357	
		SUTJESKA SSK	1358	
		TANGO SSK	1359	
		UPHOLDER SSK	1360	
		WHISKEY SSK	1361	
		WHISKEY V SSK	1362	
		ZULU IV SSK	1363	
		DORIS SSK	1364	
		VICTORIA SSK	1365	
		TYPE 212 SSK	1366	
		UNDEFINED	1367 THROUGH 1665	
		SSC GENERAL	1666	
		DELFINEN SSC	1667	
		DRAKEN SSC	1668	
		NAECKEN SSC	1669	
		NARHVALEN SSC	1670	
		SJOORMEN SSC	1671	
		TOTI TYPE 1075 SSC	1672	
		TYPE 205 SSC	1673	
		TYPE 206 SSC	1674	
		KOBBERN SSC	1675	
		TYPE 209 (TYPE 1100) SSC	1676	
		TYPE 209 (TYPE 1200) SSC	1677	
		TYPE 209 (TYPE 1300) SSC	1678	
		TYPE 209 (TYPE 1400) SSC	1679	
		TYPE 209 (TYPE 1500) SSC	1680	
		ULA SSC	1681	
		TYPE 211 SSC	1682	
		VASTERGOETLAND SSC	1683	
		TYPE 206A SSC	1684	
		UNDEFINED	1685 THROUGH 1945	
		SSA GENERAL	1946	
		BRAVO SSA	1947	
		DOLPHIN (AGSS) SSA	1948	
		GOLF I SSA	1949	

FIELD CODING FOR J7.0C1

(SHEET 71)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

809	001	SUBSURFACE (MARITIME) SPECIFIC (CONTINUED) TYPE		
-----	-----	--	--	--

GOLF I (MODIFIED) SSA	1950
GOLF II SSA	1951
INDIA SSA	1952
LIMA SSA	1953
ROMEO SSA	1954
ZULU SSA	1955
UNDEFINED	1956 THROUGH 4069
SUBSURFACE SPECIFIC TYPE 1-25	4070 THROUGH 4094
RESET TO NO STATEMENT	4095

810	001	LAND (GROUND) SPECIFIC TYPE		
-----	-----	-----------------------------	--	--

THE SPECIFIC TYPE OF POINT OR TRACK
WITH AN ENVIRONMENT/CATEGORY OF
LAND (GROUND).

NO STATEMENT	0
TOW	1
DRAGON	2
LANCE	3
SHILLEAGH	4
SERGEANT	5
AMMUNITION	6
POL	7
OBSERVATION POSTS	8
RADIO DIRECTION FINDER	9
RIVER	10
STREAM	11
LAKE	12
MARSH/SWAMP	13
MOUNTAIN	14
HILLTOP	15
RIDGE	16
DEPRESSION	17
VALLEY	18
CAVE	19
BRIDGE	20
DAM	21
BUILDING	22
VILLAGE	23
TOWN	24
ROAD INTERSECTION	25
HOSPITAL	26
HAWK	27

FIELD CODING FOR J7.0C1

(SHEET 72)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE -----	(CONTINUED)	
		I-HAWK	28	
		PATRIOT	29	
		NIKE	30	
		REDEYE	31	
		STINKER	32	
		HELLFIRE	33	
		PERSHING	34	
		JEEP	35	
		CAR	36	
		MOTORCYCLE	37	
		BICYCLE	38	
		AMPHIBIOUS VEHICLE	39	
		RIVER CROSSING EQUIPMENT	40	
		MECHANIZED MINE SWEEPER	41	
		MOBILE RADAR	42	
		SMOKE GENERATOR	43	
		(SSSB) SHIP SHORE SHIP BUFFER	44	
		(RADIL) ROCC AWACS	45	
		DIGITAL INTERFACE LINK		
		(ASIT) ADAPTABLE SURFACE	46	
		INTERFACE TERMINAL		
		(AEGIS) AEW GROUND	47	
		INTERFACE SEGMENT		
		AMBULANCE	48	
		BIOLOGICAL WEAPONS	49	
		CHEMICAL WEAPONS	50	
		NUCLEAR WEAPONS	51	
		ENGINEER VEHICLES	52	
		GENERATOR	53	
		JAMMERS	54	
		MAINTENANCE VEHICLE	55	
		MULTIPLE ROCKET LAUNCHER	56	
		RADIO	57	
		REMOTE SENSOR	58	
		SELF PROPELLED ARTILLERY	59	
		TACTICAL BRIDGE	60	
		TOWED ARTILLERY GUN	61	
		RECOILLESS RIFLE	62	
		(TACCP) TACTICAL COMMAND POST	63	
		BRIGADE	64	
		CORPS	65	

FIELD CODING FOR J7.0C1

(SHEET 73)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE -----	(CONTINUED)	
		GROUP	66	
		DIVISION	67	
		REGIMENT	68	
		BATTALION	69	
		COMPANY	70	
		PLATOON	71	
		SQUADRON	72	
		AIRBASE	73	
		WING	74	
		ANTI-AIRCRAFT GUN	75	
		AIR DEFENSE ARTILLERY GUN	76	
		MORTAR	77	
		FLAMETHROWER	78	
		TSC/MOCC/MARITIME HEADQUARTERS	79	
		MAIN BATTLE TANK	80	
		MEDIUM TANK	81	
		LIGHT TANK	82	
		TRAIN	83	
		ARMORED PERSONNEL VEHICLE	84	
		ARMORED INFANTRY FIGHTING VEHICLE	85	
		LIGHT TRUCK	86	
		MEDIUM TRUCK	87	
		HEAVY TRUCK	88	
		TANK TRANSPORTER	89	
		DUMMY	90	
		TRAP	91	
		POINT TARGET	92	
		EA SITE	93	
		ARMORED PERSONNEL CARRIER	94	
		ARMORED INFANTRY FIGHTING VEHICLE	95	
		GCI SITE	96	
		CRC	97	
		TACC (AF)	98	
		CRP	99	
		TACC (MC)	100	
		MPC	101	
		TAOC	102	

FIELD CODING FOR J7.0C1

(SHEET 74)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		AADCCS (AN/TSQ-73)	103	
		DASC	104	
		FACP	105	
		FASC	106	
		AADCP	107	
		ASRT	108	
		NCC	109	
		RCC	110	
		ROCC	111	
		DC	112	
		WOC	113	
		(ASOC) AIR SUPPORT	114	
		OPERATIONS CENTER		
		(TCO) TACTICAL COMBAT	115	
		OPERATIONS CENTER		
		(TOC) TACTICAL	116	
		OPERATIONS CENTER		
		(ARMY)		
		CHAPPARAL	117	
		FIRE DIRECTION CENTER	118	
		FIRE UNIT	119	
		DIVARTY	120	
		BATTERY	121	
		SELF-PROPELLED ARTILLERY	122	
		(GOC) GROUND OPERATIONS	123	
		CENTER		
		(ICC) INFORMATION	124	
		COORDINATION CENTER		
		(BOC) BATTERY OPERATIONS	125	
		CENTER		
		(ECS) ENGAGEMENT CONTROL	126	
		STATION		
		(PCP) PLATOON COMMAND	127	
		POST		
		(CRG) COMMUNICATIONS	128	
		RELAY GROUP		
		TUNNELS	129	
		RAILYARDS	130	
		BENCHMARK	131	
		TROOP	132	
		LANDING ZONE	133	
		DROP ZONE	134	
		ASSEMBLY OR STAGING AREA	135	

FIELD CODING FOR J7.0C1

(SHEET 75)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		DECONTAMINATION SITE	136	
		RE-ENTRY POINT/LINE	137	
		CROSSING AREA FOR		
		RECON PATROLS		
		SAM	138	
		SSM	139	
		ANTI-TANK WEAPON	140	
		DIRECT SUPPORT	141	
		GENERAL SUPPORT	142	
		INTERCEPTION	143	
		BLOCKING	144	
		REINFORCING	145	
		REDEPLOYMENT	146	
		POLICING	147	
		INTRUDING	148	
		PREPARING BARRIER	149	
		DUMPING EQUIPMENT	150	
		RELIEF	151	
		CONVOY	152	
		ANTI-AIRCRAFT	153	
		AIR DEFENSE ARTILLERY	154	
		ARTILLERY	155	
		SURVEILLANCE	156	
		PICKETING	157	
		LOGISTICS SUPPORT	158	
		SEARCH	159	
		DIRECT ARTILLERY SUPPORT	160	
		GENERAL ARTILLERY	161	
		SUPPORT		
		MAINTAINING LINE OF	162	
		COMMUNICATION		
		COMMITTING	163	
		COUNTER-ATTACK	164	
		ELECTRONIC WARFARE	165	
		THREATEN	166	
		DESTROY	167	
		CONTACT	168	
		EVALUATION	169	
		TRANSPORTER	170	
		ARMORED VEHICLE	171	
		GUN	172	
		HALF TRACK	173	
		COMMUNICATIONS EQUIPMENT	174	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	
		TARGET	175	
		AIR DEFENSE SITE	176	
		FIM-92 STINGER	177	
		NIM-23 HAWK	178	
		MIM-42 REDEYE	179	
		MIM-72 CHAPARRAL	180	
		MIM-104 PATRIOT	181	
		RIM-2 TERRIER	182	
		RIM-7 SEA SPARROW	183	
		RIM-8 TALOS	184	
		RIM-24 TARTAR	185	
		RIM-66 STANDARD MISSILE	186	
		RIM-67 STANDARD MISSILE	187	
		BLOWPIPE	188	
		DISUSED	189 THROUGH 190	
		SEA DART	191	
		DISUSED	192 THROUGH 193	
		CROTALE	194	
		RAPIER	195	
		RBS-70/GIRAFFE	196	
		SAM BLOODHOUND	197	
		SAM ROLAND	198	
		SA-2 GUIDELINE	199	
		SA-3 GOA	200	
		SA-4 GANEF	201	
		SA-N-3 GOBLET	202	
		SA-5 GAMMON	203	
		SA-N-4 GECKO	204	
		SA-6 GAINFUL	205	
		SA-N-6 GRUMBLE	206	
		SA-7 GRAIL	207	
		SA-8 GECKO	208	
		SA-9 GASKIN	209	
		SA-10 GRUMBLE	210	
		SA-11 GADFLY	211	
		SA-12	212	
		SA-13 GOPHER	213	
		MISTRAL	214	
		SA-N-7 GADFLY	215	
		SA-N-8 GREMLIN	216	
		SA-14 GREMLIN	217	
		SA-16 GIMLET	218	
		SA-X-17	219	

FIELD CODING FOR J7.0C1

(SHEET 77)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE -----	(CONTINUED)	
		TOC (THAAD)	220	
		SSI (THAAD)	221	
		LCS (THAAD)	222	
		LAUNCHER (THAAD)	223	
		TMD-GBR (THAAD)	224	
		JTAGS	225	
		ADTOC/BN	226	
		ADTOC/BDE	227	
		ADCP	228	
		SM-2 BLOCK II	229	
		SM-2 BLOCK III	230	
		SM-2 BLOCK IIIA	231	
		SM-2 BLOCK IIIB	232	
		SM-2 BLOCK IV	233	
		SM-2 BLOCK IVA	234	
		SM-3 LEAP	235	
		SA-N-5 GRAIL	236	
		SA-N-11 GRISOM	237	
		SA-12A GLADIATOR	238	
		SA-12B GIANT	239	
		SA-14 GREMLIN	240	
		SA-15 GAUNTLET	241	
		SA-17 GRIZZLY	242	
		SA-N-12 GRIZZLY	243	
		SA-18 GROUSE	244	
		SA-19 GRISOM	245	
		RIM-116 RAM	246	
		ADATS	247	
		JAVELIN	248	
		STARBURST	249	
		STARSTREAK	250	
		ASPIDER	251	
		FRONT DOOR	252	
		ROLAND II	253	
		AKASH	254	
		ANZA	255	
		ANZA II	256	
		CSA-1	257	
		CSA-2	258	
		CSA-4	259	
		CSA-5	260	
		FM-80	261	
		HN-5	262	

FIELD CODING FOR J7.0C1

(SHEET 78)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		NK-7	263	
		NK-16	264	
		PANTZYR	265	
		RAPIER 2000/JERNAS	266	
		RBS-90	267	
		SAKR	268	
		SAVA	269	
		SHANINE	270	
		SKYGUARD ASPIDE	271	
		SPADA	272	
		TAM SAM	273	
		TIGERCAT	274	
		VANGUARD	275	
		SA-N-1 GOA	276	
		SA-N-9 GAUNTLET	277	
		SA-N-10	278	
		ALBATROS/ASPIDE	279	
		SM-1	280	
		SA-2 IRAQ MOD	281	
		SA-2 NORTH KOREA RO	282	
		AEGIS-TI	283	
		MASURGS	284	
		ROCK CAKE	285	
		SEA INDIGO	286	
		TANSAM	287	
		TOKEN A/D	288	
		GUARDSMAN	289	
		SILKWORM	290	
		SNOW DRIFT 11/17	291	
		TIGER S	292	
		TIGER G	293	
		TUBE ARM SA-11	294	
		SEACAT 262/903/904	295	
		AN/MPQ-4	296	
		AN-TPQ-36	297	
		AN/TPS-25	298	
		CYMBERLINE	299	
		PORK TROUGH 1	300	
		RASIT	301	
		SNAR-6	302	
		TALL MIKE	303	
		AN/FPN-33/36/40	304	
		AN/TPN-12/17	305	

5.2-111

MIL-STD-6016B

FIELD CODING FOR J7.0C1

(SHEET 79)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		CPN-4, FPN-16/22	306	
		RP-2E	307	
		RP-4G	308	
		THD-1010/1013	309	
		TPN-8/14/18TSQ-7	310	
		TWO SPOT	311	
		CSA-X-2	312	
		ASR-0	313	
		FALCON-G	314	
		MARCON LN66TPS66	315	
		SHEET BEND	316	
		WALL RUST A/B	317	
		DON-2	318	
		DONKAY/PALM FROND	319	
		EYE SHIELD	320	
		MARELD	321	
		PEEL PAIR	322	
		POT HEAD	323	
		RACAL-DECCA	324	
		RICE FIELD	325	
		RICE SCREEN	326	
		RICE CUP	327	
		SQUARE TIE	328	
		SS-N-2	329	
		STRUT CURVE	330	
		STRUT PAIR	331	
		BOFI	332	
		CORN CAN	333	
		DRUM TILT	334	
		ELDORADO	335	
		FLAP WHEEL	336	
		FLEDERMAUS	337	
		FLYCATCHER	338	
		GEPARD	339	
		GUN DISH	340	
		SPAAMG	341	
		TEAMPLAY	342	
		TEAMWORK	343	
		VULCAN	344	
		9LV 200	345	
		AN/SPG-50	346	
		BASS TILT	347	
		GOALKEEPER	348	

FIELD CODING FOR J7.0C1

(SHEET 80)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		HAWK SCREECH	349	
		KITE SCREECH A/B	350	
		OWL SCREECH	351	
		MARK 68 FCS	352	
		MK 57/63 GFCS	353	
		MK-86 GFCS	354	
		MUFF COB	355	
		SIGNAAL STIR 180	356	
		SUN VISOR	357	
		TOP BOW	358	
		TYPE 341	359	
		VEGA	360	
		WM-20 SERIES	361	
		MARCONI S613	362	
		THIN SKIN	363	
		AN/FPS-77	364	
		MRL-1	365	
		MRL-4/5	366	
		BIG BIRD	367	
		SIDE NET	368	
		ODD LOT/PAIR/GROUP	369	
		FIRE WHEEL/MOD	370	
		BARLOCK	371	
		FIRECAN/WHIFF	372	
		GIN SLING	373	
		FRUSKA GORA	374	
		TIN SHIELD	375	
		BIG BAR/MESH	376	
		SS-N-S SCOOP PAIR	377	
		SGR-105 DA-01/00	378	
		CROSS SLOT	379	
		BACK NET/TRAP	380	
		GATE POLE/HIGH/POST	381	
		TOP LOT	382	
		RICE CAKE	383	
		JY-14/9	384	
		TIN TRAP	385	
		HEAD NET A/B/C	386	
		SLIM/SEA/HAIR NET	387	
		LOW SIEVE	388	
		EGG CUP	389	
		CUT WEB	390	
		SKYWATCH	391	

FIELD CODING FOR J7.0C1

(SHEET 81)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		HALF PLATE	392	
		SKIN HEAD	393	
		SIEVE FAMILY	394	
		SO-A	395	
		HIGH SHELL	396	
		AN/FPS-6/89	397	
		DECCA HF200	398	
		MARCONI 5244	399	
		TYPE 88 MK 1	400	
		MARCONI S-247	401	
		AN/MPN-11	402	
		RAT-31S	403	
		AA4 MK 6/7	404	
		AN/TPS-43	405	
		SCR-584	406	
		AN/TPS-48	407	
		MARCONI S-1006/269	408	
		PALMIER	409	
		FIREFINDER LR	410	
		VOLEX III/IV	411	
		THD-1940	412	
		HADR (HR-3000)	413	
		AN/RPS-70/72/75	414	
		MPDR-18/S	415	
		WATCHMAN	416	
		MARCONI S-631/647	417	
		MARCONI S-706/711/712	418	
		AN/TPS-73	419	
		TRS-22XX	420	
		AN/SPS-8	421	
		DECCA AWS-1	422	
		MK-26	423	
		AN/SPS-48	424	
		RAN-7S	425	
		SEA TIGER	426	
		DA-08/2LS	427	
		AWS-9 (TYPE 996)	428	
		DA-05/00	429	
		MPDR-45	430	
		TOP STEER/PLATE	431	
		STRIKE OUT	432	
		SPONGE CAKE	433	
		NC1 ROLAND	434	

5.2-114

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		NC1 MISTRAL	435	
		FDOC	436	
		MCT	437	
		CETAC	438	
		ISARD	439	
		UNDEFINED	440 THROUGH 4000	
		WAYPOINT	4001	
		STRIKE INITIAL POINT	4002	
		UNDEFINED	4003 THROUGH 4093	
		RESET TO NO STATEMENT	4094	
		UNDEFINED	4095	

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

J7.1 MESSAGE SUMMARY

PURPOSE

The J7.1 Data Update Request Message is used to request tactical information that has been locally generated by units participating within the interface.

DATA ELEMENT SUMMARY

<u>J7.1I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
SPARE	1
ACTION, DATA UPDATE REQUEST	3
SPARE	2
SPARE(19)*****	19
TRACK NUMBER, REFERENCE(19)****	
REFERENCE POINT DATA REQUEST***	
INDICATOR(1)	*
DISUSED	1
ELECTRONIC ATTACK DATA REQUEST*	
INDICATOR(1)	*
ES DATA REQUEST INDICATOR(1)	*
ELECTRONIC WARFARE FIXES DATA	*
REQUEST INDICATOR(1)	*
WEAPON STATUS DATA REQUEST	*
INDICATOR(1)	*
WEATHER DATA REQUEST	*
INDICATOR(1)	*
AMPLIFICATION DATA REQUEST	*
INDICATOR(1)	*
FILTER DATA REQUEST	*
INDICATOR(1)	*
SPARE(9)*****	9
FILTER NUMBER	4
SPARE(4)*****	
NUMBER/FREQUENCY OF UPDATES(3)*	4
COVARIANCE INDICATOR(1)*****	
TRACK NUMBER, ADDRESSEE 1	15

<u>J7.1C1</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
CONTINUATION WORD LABEL	5
TRACK NUMBER, ADDRESSEE 2	15
TRACK NUMBER, ADDRESSEE 3	15
TRACK NUMBER, ADDRESSEE 4	15
TRACK NUMBER, ADDRESSEE 5	15
SPARE	3

MIL-STD-6016B

J7.1 TRANSMIT/RECEIVE RULES

TITLE: Data Update Request Message

TRANSMIT RULES

1. The J7.1I Data Update Request initial word shall be transmitted once by any JU either automatically or as a result of operator action.
2. The J7.1C1 Data Update Request Additional Addresses continuation word shall be transmitted with the J7.1I word when multiple JUs are addressed.

RECEIVE RULES

1. Upon receipt of a J7.1 (ACT = 0) Data Update Request by Request Indicator message, the C² JU shall respond with all information requested which the C² JU has originated, or all multi-point areas and multi-segmented lines (defined by more than one J3.0 message) for which the C² JU has R² if the Reference Point Data Request Indicator is set to value 1. The information shall be requested by setting the request indicator in the J7.1 (ACT = 0) message.
2. Upon receipt of a J7.1 (ACT = 1) Data Update Request by Track Number message, the C² JU with R² for the Reference TN shall respond with the appropriate J3 Surveillance message.
3. Upon receipt of a J7.1 (ACT = 1) message, the JUs that have originated Amplification data on the Reference TN shall respond with the appropriate series messages.
4. Upon receipt of a J7.1 (ACT = 1) message the JU controlling the Reference TN shall transmit the J10.5 Controlling Unit Report message, the J10.2 Engagement Status message, and the appropriate J13 series message.
5. Upon receipt of a J7.1 (ACT = 2) Ballistic Missile Update Request, the C² JU with R² for the Reference TN shall respond with a J3.6 Space Track message in accordance with the received Number/Frequency of Updates and Covariance Indicator fields.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: DATA UPDATE REQUEST INITIAL WORD

49	48	47:	46	45	44	43	42	41	40:	39:	38:	37	36	35	34	33	32	31	30	29	28	27	26	25				
FILTER			:	FIL:AMD:WXD:WSD:EWF:ESD:ECD:			:			RDR:			SPARE															
NUMBER			:											:	DUD:													
			:	SPARE										:	:	TRACK NUMBER, REFERENCE												
4			:	7										:	1	:	1	:	19									

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55:	54	53	52	51:	50
:																:	SPARE			:
:																:	-----			:
:	TRACK NUMBER, ADDRESSEE 1															:	COV: NUMBER/			----
:																:	IND: FREQUENCY			:
:																:	:OF UPDATES			:
:	15															:	4			:

WORD DESCRIPTION

WORD NUMBER: J7.1I

WORD TITLE: DATA UPDATE REQUEST INITIAL WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	00
270	004	LABEL, J-SERIES	2-	6 5	00111
271	005	SUBLABEL, J-SERIES	7-	9 3	001
800	001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
756	001	SPARE (SP)	13	1	
1606	002	ACTION, DATA UPDATE REQUEST	14-	16 3	SEE NOTE 1 AND 2.
756	002	SPARE (SP)	17-	18 2	
756	019	SPARE	19-	37 19	
769	002	TRACK NUMBER, REFERENCE	19-	37 19	SEE NOTE 1.
1675	001	REFERENCE POINT DATA REQUEST INDICATOR (RDR)	38	1	
758	001	DISUSED (DUD)	39	1	
1675	003	ELECTRONIC ATTACK DATA REQUEST INDICATOR (ECD)	40	1	
1675	004	ES DATA REQUEST INDICATOR (ESD)	41	1	
1675	009	ELECTRONIC WARFARE FIXES DATA REQUEST INDICATOR (EWF)	42	1	
1675	005	WEAPON STATUS DATA REQUEST INDICATOR (WSD)	43	1	
1675	006	WEATHER DATA REQUEST INDICATOR (WXD)	44	1	
1675	007	AMPLIFICATION DATA REQUEST INDICATOR (AMD)	45	1	
1675	008	FILTER DATA REQUEST INDICATOR (FIL)	46	1	
756	009	SPARE	38-	46 9	
1747	001	FILTER NUMBER	47-	50 4	
756	004	SPARE	51-	54 4	
1111	001	NUMBER/FREQUENCY OF UPDATES	51-	53 3	
1107	001	COVARIANCE INDICATOR (COV IND)	54	1	
769	017	TRACK NUMBER, ADDRESSEE 1	55-	69 15	

J7.1I WORD NOTES

TITLE: Data Update Request Initial Word

NOTE 1 - When the Action, Data Update Request field is set to value 1 or 2, bits 19-37 are set to the Reference TN and bits 38-46 are set to spare. For all other values of the Action, Data Update Request field, bits 19-37 are set to spare.

NOTE 2 - When the Action, Data Update Request field is set to value 2, bits 51-54 are set to the Number/Frequency of Updates and Covariance Indicator fields. For all other values of the Action, Data Update Request field, bits 51-54 are set to spare.

FIELD CODING FOR J7.1I				(SHEET 1)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1606	002	ACTION, DATA UPDATE REQUEST -----		DESCRIBES THE DATA THAT IS BEING REQUESTED BY THE TRANSMISSION OF A DATA UPDATE REQUEST MESSAGE.
		DATA UPDATE REQUEST BY REQUEST INDICATOR	0	THE UNIT SPECIFIED IN THE ADDRESSEE TN IS REQUESTED TO TRANSMIT ALL DATA SPECIFIED BY THE REQUEST INDICATORS.
		DATA UPDATE REQUEST BY TRACK NUMBER	1	UNIT(S) SPECIFIED IN THE ADDRESSEE TN ARE REQUESTED TO TRANSMIT CURRENT DATA APPLICABLE TO THE REFERENCE TN.
		BALLISTIC MISSILE UPDATE REQUEST	2	THE UNIT SPECIFIED IN THE ADDRESSEE TN IS REQUESTED TO TRANSMIT DATA APPLICABLE TO THE REFERENCE TN.
		UNDEFINED	3 THROUGH 7	
769	002	TRACK NUMBER, REFERENCE -----		A REFERENCE NUMBER USED TO ASSOCIATE INFORMATION AND DIRECTIVES WITH THE TRACK.
				THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE-BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANNN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.
				CODING CHARACTER

FIELD CODING FOR J7.1I				(SHEET 2)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
				00000 0
				00001 1
				00010 2
				00011 3
				00100 4
				00101 5
				00110 6
				00111 7
				01000 A
				01001 B
				01010 C
				01011 D
				01100 E
				01101 F
				01110 G
				01111 H
				10000 J
				10001 K
				10010 L
				10011 M
				10100 N
				10101 P
				10110 Q
				10111 R
				11000 S
				11001 T
				11010 U
				11011 V
				11100 W
				11101 X
				11110 Y
				11111 Z
		00000	0	NO STATEMENT.
		00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		00077	63	ILLEGAL.
		00100-00175	64 THROUGH 125	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		00176	126	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		00177	127	COLLECTIVE ADDRESS.
		00200-07776	128 THROUGH 4094	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO

			FIELD CODING FOR J7.1I	(SHEET 3)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		07777	4095	C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS. ILLEGAL.
		0A000-0Z777	4096 THROUGH 16383	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		10000-17777	16384 THROUGH 20479	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		20000-27777	32768 THROUGH 36863	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND

			FIELD CODING FOR J7.1I	(SHEET 4)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		50000-57777	81920 THROUGH 86015	REFERENCE POINTS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		70000-77776	114688 THROUGH 118782	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
1675	001	REFERENCE POINT DATA REQUEST INDICATOR -----		USED TO REQUEST THE ADDRESSEE TN TRANSMIT ALL CURRENT J3.0 LINES AND AREAS DEFINED BY MORE THAN ONE J3.0 MESSAGE FOR WHICH THE UNIT HAS R2.
		NO STATEMENT	0	
		REFERENCE POINT DATA UP- DATE REQUESTED	1	THE UNIT SPECIFIED IN THE ADDRESSEE TN IS REQUESTED TO TRANSMIT ALL CURRENT J3.0 LINES AND AREAS DEFINED BY MORE THAN ONE J3.0 MESSAGE FOR WHICH THE UNIT HAS R2.

FIELD CODING FOR J7.1I

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1675	003	ELECTRONIC ATTACK DATA REQUEST INDICATOR ----- NO STATEMENT 0 EA DATA UPDATE REQUESTED 1		USED TO REQUEST THE ADDRESSEE TN TRANSMIT ALL CURRENT EA FIX AND/OR BEARING DATA THAT THE UNIT ORIGINATED. THE UNIT SPECIFIED IN THE ADDRESSEE TN IS REQUESTED TO TRANSMIT ALL CURRENT EA FIX AND/OR BEARING DATA THAT THE UNIT ORIGINATED AND MAY INCLUDE DATA RECEIVED FROM REMOTE SOURCES FOR FIELDS FOR WHICH LOCALLY DERIVED DATA IS NOT AVAILABLE. WHEN THERE IS NO LOCALLY ORIGINATED DATA AVAILABLE, A RESPONSE MESSAGE MAY BE TRANSMITTED WITH REMOTE SOURCE DATA ONLY IF INITIALIZED BY OPERATOR ACTION.
1675	004	ES DATA REQUEST INDICATOR ----- NO STATEMENT 0 ES DATA UPDATE REQUESTED 1		USED TO REQUEST THE ADDRESSEE TN TRANSMIT ALL CURRENT ES FIX AND/OR BEARING DATA. THE UNIT SPECIFIED IN THE ADDRESSEE TN IS REQUESTED TO TRANSMIT ALL CURRENT ES FIX AND/OR BEARING DATA THAT THE UNIT ORIGINATED AND MAY INCLUDE DATA RECEIVED FROM REMOTE SOURCES FOR FIELDS FOR WHICH LOCALLY DERIVED DATA IS NOT AVAILABLE. WHEN THERE IS NO LOCALLY ORIGINATED DATA AVAILABLE, A RESPONSE MESSAGE MAY BE TRANSMITTED WITH REMOTE SOURCE DATA ONLY IF INITIALIZED BY OPERATOR ACTION.
1675	009	ELECTRONIC WARFARE FIXES DATA REQUEST INDICATOR ----- NO STATEMENT 0 EW FIXES REQUESTED 1		USED TO REQUEST THE ADDRESSEE TN TRANSMIT ALL CURRENT EW FIXES. THE UNIT SPECIFIED IN THE ADDRESSEE TN IS REQUESTED TO TRANSMIT ALL CURRENT EW FIXES THAT THE UNIT ORIGINATED AND MAY INCLUDE DATA

FIELD CODING FOR J7.1I

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1675	009	ELECTRONIC WARFARE FIXES DATA REQUEST INDICATOR -----		RECEIVED FROM REMOTE SOURCES FOR FIELDS FOR WHICH LOCALLY DERIVED DATA IS NOT AVAILABLE. WHEN THERE IS NO LOCALLY ORIGINATED DATA AVAILABLE, A RESPONSE MESSAGE MAY BE TRANSMITTED WITH REMOTE SOURCE DATA ONLY IF INITIALIZED BY OPERATOR ACTION.
1675	005	WEAPON STATUS DATA REQUEST INDICATOR -----		USED TO REQUEST THE ADDRESSEE TN TRANSMIT ALL CURRENT WEAPON STATUS DATA THAT THE UNIT ORIGINATED.
		NO STATEMENT	0	
		WEAPON STATUS DATA UPDATE REQUESTED	1	THE UNIT SPECIFIED IN THE ADDRESSEE TN IS REQUESTED TO TRANSMIT ALL CURRENT WEAPON STATUS DATA.
1675	006	WEATHER DATA REQUEST INDICATOR -----		USED TO REQUEST THE ADDRESSEE TN TRANSMIT ALL CURRENT WEATHER DATA THAT THE UNIT ORIGINATED.
		NO STATEMENT	0	
		WEATHER DATA UPDATE REQUESTED	1	THE UNIT SPECIFIED IN THE ADDRESSEE TN IS REQUESTED TO TRANSMIT ALL CURRENT WEATHER DATA THAT THE UNIT ORIGINATED.
1675	007	AMPLIFICATION DATA REQUEST INDICATOR -----		USED TO REQUEST THE ADDRESSEE TN TRANSMIT ALL CURRENT AMPLIFICATION DATA THAT THE UNIT ORIGINATED.
		NO STATEMENT	0	
		AMPLIFICATION DATA UPDATE REQUESTED	1	THE UNIT SPECIFIED IN THE ADDRESSEE TN IS REQUESTED TO TRANSMIT ALL CURRENT AMPLIFICATION DATA.
1675	008	FILTER DATA REQUEST INDICATOR -----		USED TO REQUEST THE ADDRESSEE TN TRANSMIT ALL CURRENT FILTER DATA THAT THE UNIT ORIGINATED.
		NO STATEMENT	0	
		FILTER DATA UPDATE REQUESTED	1	THE UNIT SPECIFIED IN THE ADDRESSEE TN IS REQUESTED TO TRANSMIT ALL CURRENT FILTER DATA.

FIELD CODING FOR J7.1I

(SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1747	001	FILTER NUMBER -----		A NUMBER ASSIGNED BY A UNIT TO IDENTIFY A SPECIFIC FILTER.
		NO STATEMENT	0	
		FILTER NUMBER	1 THROUGH 14	UNIQUE FILTER NUMBERS ASSIGNED BY A UNIT.
		ALL FILTERS	15	
1111	001	NUMBER/FREQUENCY OF UPDATES -----		SPECIFIES THE NUMBER AND FREQUENCY OF UPDATES REQUESTED ON REFERENCE TN. USED IN CONJUNCTION WITH THE COVARIANCE INDICATOR.
		NO STATEMENT	0	
		1 UPDATE	1	ADDRESSEE TN IS REQUESTED TO SEND 1 UPDATE.
		2 UPDATES AT 4 SECOND INTERVALS	2	ADDRESSEE TN IS REQUESTED TO SEND 2 UPDATES AT THE GREATER OF SENSOR RATE OR 4 SECOND INTERVALS.
		2 UPDATES AT 2 SECOND INTERVALS	3	ADDRESSEE TN IS REQUESTED TO SEND 2 UPDATES AT THE GREATER OF SENSOR RATE OR 2 SECOND INTERVALS.
		UNDEFINED	4 THROUGH 7	
1107	001	COVARIANCE INDICATOR -----		SPECIFIES WHETHER COVARIANCE DATA ARE REQUESTED. USED IN CONJUNCTION WITH THE NUMBER/FREQUENCY OF UPDATES FIELD.
		NO COVARIANCE	0	NO COVARIANCE DATA ARE REQUESTED FROM THE ADDRESSEE TN ON THE REFERENCE TN.
		COVARIANCE REQUEST	1	COVARIANCE DATA ARE REQUESTED FROM THE ADDRESSEE TN ON THE REFERENCE TN.
769	017	TRACK NUMBER, ADDRESSEE 1 -----		THE TN OF ONE OF A NUMBER OF UNITS (I.E., JUS OR PUS) TO WHICH A MESSAGE CAN BE ADDRESSED.
		NO STATEMENT	0	
		NUMERIC	00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		ILLEGAL	00077 (OCTAL)	
		NUMERIC	00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC	00177 (OCTAL)	COLLECTIVE ADDRESS.

			FIELD CODING FOR J7.1I	(SHEET 8)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	017	TRACK NUMBER, ADDRESSEE 1 ----- NUMERIC	(CONTINUED) 00200 THROUGH 07776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL NUMERIC	07777 (OCTAL) 10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J7.1C1

WORD TITLE: DATA UPDATE REQUEST ADDITIONAL ADDRESSES CONTINUATION WORD

24	23	22:	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07:	06	05	04	03	02:	01	00:		
<---			:	TRACK NUMBER, ADDRESSEE 2														:	CONTINUATION WORD			:	WORD		:	
			:															:	LABEL			:	FORMAT		:	
			:	15														:	5			:	2		:	
49	48	47	46	45	44	43	42	41	40	39	38	37:	36	35	34	33	32	31	30	29	28	27	26	25		
TRACK NUMBER, ADDRESSEE 4												:	TRACK NUMBER, ADDRESSEE 3													
15												:	15													
			:	69	68	67:	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52:	51	50			
			:	SPARE			:	TRACK NUMBER, ADDRESSEE 5														:	---			>
			:				:															:				:
			:	3			:	15														:				:

WORD DESCRIPTION

WORD NUMBER: J7.1C1

WORD TITLE: DATA UPDATE REQUEST ADDITIONAL ADDRESSES CONTINUATION WORD

REFERENCE		BIT #	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0- 1 2	01
1551 001	CONTINUATION WORD LABEL	2- 6 5	00001
769 019	TRACK NUMBER, ADDRESSEE 2	7- 21 15	
769 020	TRACK NUMBER, ADDRESSEE 3	22- 36 15	SAME CODING AS FOR BITS 7-21.
769 021	TRACK NUMBER, ADDRESSEE 4	37- 51 15	SAME CODING AS FOR BITS 7-21.
769 022	TRACK NUMBER, ADDRESSEE 5	52- 66 15	SAME CODING AS FOR BITS 7-21.
756 003	SPARE	67- 69 3	

FIELD CODING FOR J7.1C1

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	019	TRACK NUMBER, ADDRESSEE 2 -----		THE TN OF ONE OF A NUMBER OF UNITS (I.E., JUS OR PUS) TO WHICH A MESSAGE CAN BE ADDRESSED.
		NO STATEMENT	0	
		NUMERIC	00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		ILLEGAL	00077 (OCTAL)	
		NUMERIC	00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC	00177 (OCTAL)	COLLECTIVE ADDRESS.
		NUMERIC	00200 THROUGH 07776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL	07777 (OCTAL)	
		NUMERIC	10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.

MIL-STD-6016B

J7.2 MESSAGE SUMMARY

PURPOSE

The J7.2 Correlation Message is used to resolve a dual designation problem by identifying one track to be retained and another to be dropped.

DATA ELEMENT SUMMARY

<u>J7.2I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
SPARE	1
ACTION, CORRELATE	3
RESPONSE VALUE	2
TRACK NUMBER, RETAINED	19
SPARE	13
TRACK NUMBER, DROPPED	19

MIL-STD-6016B

J7.2 TRANSMIT/RECEIVE RULES

TITLE: Correlation Message

TRANSMIT RULES

1. The J7.2 Correlation message shall be transmitted twice at an RRN = 10 (750 msec, 500-1,000 msec interval) by a JU originating, reversing, or rejecting the J7.2 message in accordance with the rules specified in paragraph 4.7.3.1.

RECEIVE RULES

Upon receipt of the J7.2 message, a system shall respond in accordance with the procedures described in paragraph 4.7.3.2.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: CORRELATION INITIAL WORD

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
SPARE												:	TRACK NUMBER, RETAINED											
13												:	19											

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51:	50
:																				:
:	TRACK NUMBER, DROPPED																			:-->
:																				:
:	19																			:

WORD DESCRIPTION

WORD NUMBER: J7.2I

WORD TITLE: CORRELATION INITIAL WORD

REFERENCE DFI/DUI	DATA FIELD DESCRIPTOR	BIT #		RESOLUTION, CODING, ETC
		POSITION	BITS	
1550 001	WORD FORMAT	0-	1 2	00
270 004	LABEL, J-SERIES	2-	6 5	00111
271 005	SUBLABEL, J-SERIES	7-	9 3	010
800 001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
756 001	SPARE (SP)	13	1	
1606 003	ACTION, CORRELATE	14-	16 3	
1553 001	RESPONSE VALUE (RSP VAL)	17-	18 2	
769 029	TRACK NUMBER, RETAINED	19-	37 19	
756 013	SPARE	38-	50 13	
769 030	TRACK NUMBER, DROPPED	51-	69 19	

FIELD CODING FOR J7.2I					(SHEET 1)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION	
1606	003	ACTION, CORRELATE -----		DESCRIBES THE ACTION TO BE ACCOM- PLISHED WHEN A CORRELATION MESSAGE IS RECEIVED.	
		CORRELATE DATA	0	THE TRACK SPECIFIED IN THE RETAINED TN HAS BEEN CORRELATED WITH THE TRACK SPECIFIED IN THE DROPPED TN. THE RETAINED TN SHOULD BE RETAINED AND THE DROPPED TN SHOULD BE DROPPED. ALL RECEIVING UNITS WILL PERFORM THE SAME CORRELATION EXCEPT AS SPECIFICALLY DEFINED IN THE RESOLUTION OF DUAL DESIGNATIONS PARAGRAPH OF THE SYSTEM INFORMATION SUBSECTION.	
		UNDEFINED	1 THROUGH 7		
1553	001	RESPONSE VALUE -----			
		REVERSE CORRELATION IS ACCEPTABLE	0		
		REVERSE CORRELATION IS NOT ACCEPTABLE	1	REVERSE CORRELATION WILL BE REJECTED.	
		CORRELATION REQUEST IS REJECTED	2		
		MANUALLY INITIATED CORRELATION REQUEST	3		
769	029	TRACK NUMBER, RETAINED -----		THE TN THAT HAS BEEN IDENTIFIED TO BE RETAINED WHEN A DUAL DESIGNATION PROBLEM EXISTS. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE- BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH	

FIELD CODING FOR J7.2I			(SHEET 2)
DFI	DUI	DUI/DI NAME	DI BIT CODE
769	029	TRACK NUMBER, RETAINED	(CONTINUED)

FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6
00111	7
01000	A
01001	B
01010	C
01011	D
01100	E
01101	F
01110	G
01111	H
10000	J
10001	K
10010	L
10011	M
10100	N
10101	P
10110	Q
10111	R
11000	S
11001	T
11010	U
11011	V
11100	W
11101	X
11110	Y
11111	Z

			FIELD CODING FOR J7.2I	(SHEET 3)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	029	TRACK NUMBER, RETAINED -----	(CONTINUED)	
		00000	0	NO STATEMENT.
		00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU). ILLEGAL.
		00077	63	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU). RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		00100-00175	64 THROUGH 125	COLLECTIVE ADDRESS.
		00176	126	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		00177	127	ILLEGAL.
		00200-07776	128 THROUGH 4094	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		07777	4095	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		0A000-0Z777	4096 THROUGH 16383	ILLEGAL.
		10000-17777	16384 THROUGH 20479	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		20000-27777	32768 THROUGH 36863	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
				ALLOCATED IN BLOCKS TO C2 JUS TO BE

			FIELD CODING FOR J7.2I	(SHEET 4)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	029	TRACK NUMBER, RETAINED -----	(CONTINUED)	
				USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		70000-77776	114688 THROUGH 118782	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.

FIELD CODING FOR J7.2I

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	030	TRACK NUMBER, DROPPED -----		THE TN THAT HAS BEEN IDENTIFIED TO BE DROPPED WHEN A DUAL DESIGNATION PROBLEM EXISTS. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE- BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANNN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6
00111	7
01000	A
01001	B
01010	C
01011	D
01100	E
01101	F
01110	G
01111	H

FIELD CODING FOR J7.2I

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	030	TRACK NUMBER, DROPPED -----	(CONTINUED)	
				10000 J
				10001 K
				10010 L
				10011 M
				10100 N
				10101 P
				10110 Q
				10111 R
				11000 S
				11001 T
				11010 U
				11011 V
				11100 W
				11101 X
				11110 Y
				11111 Z
		00000	0	NO STATEMENT.
		00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU). ILLEGAL.
		00077	63	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU). RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		00100-00175	64 THROUGH 125	COLLECTIVE ADDRESS.
		00176	126	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		00177	127	ILLEGAL.
		00200-07776	128 THROUGH 4094	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		07777	4095	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		0A000-0Z777	4096 THROUGH 16383	ILLEGAL.
		10000-17777	16384 THROUGH 20479	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
				ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND

			FIELD CODING FOR J7.2I	(SHEET 7)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	030	TRACK NUMBER, DROPPED -----	(CONTINUED)	
		20000-27777	32768 THROUGH 36863	REFERENCE POINTS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE

			FIELD CODING FOR J7.2I	(SHEET 8)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	030	TRACK NUMBER, DROPPED -----	(CONTINUED)	
		70000-77776	114688 THROUGH 118782	USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

J7.3 MESSAGE SUMMARY

PURPOSE

The J7.3 Pointer Message is used to transmit a geographic position to an addressed unit within the interface.

DATA ELEMENT SUMMARY

<u>J7.3I</u>		<u>J7.3C3 (Continued)</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	CHARACTER #15	6
LABEL, J-SERIES	5	CHARACTER #16	6
SUBLABEL, J-SERIES	3	CHARACTER #17	6
MESSAGE LENGTH INDICATOR	3	CHARACTER #18	6
ACTION, POINTER	3	CHARACTER #19	6
TEXT INDICATOR	2	CHARACTER #20	6
LATITUDE, 0.0412 MINUTE	18	SPARE	3
LONGITUDE, 0.0412 MINUTE	19		
TRACK NUMBER, ADDRESSEE 1	15		

<u>J7.3C1</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
CONTINUATION WORD LABEL	5
TRACK NUMBER, ADDRESSEE 2	15
TRACK NUMBER, ADDRESSEE 3	15
TRACK NUMBER, ADDRESSEE 4	15
TRACK NUMBER, ADDRESSEE 5	15
SPARE	3

<u>J7.3C2</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
CONTINUATION WORD LABEL	5
CHARACTER #1	6
CHARACTER #2	6
CHARACTER #3	6
CHARACTER #4	6
CHARACTER #5	6
CHARACTER #6	6
CHARACTER #7	6
CHARACTER #8	6
CHARACTER #9	6
CHARACTER #10	6
SPARE	3

<u>J7.3C3</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
CONTINUATION WORD LABEL	5
CHARACTER #11	6
CHARACTER #12	6
CHARACTER #13	6
CHARACTER #14	6

MIL-STD-6016B

J7.3 TRANSMIT/RECEIVE RULES

TITLE: Pointer

TRANSMIT RULES

1. The J7.3 Pointer message shall be transmitted one time when initiated by operator action.
2. A J7.3 Pointer message may include up to 20 characters of text in the J7.3C2/C3 word(s) as indicated by the Text Indicator in the initial word. If the text data ends before the last character location in the C2 or C3 word being filled is reached, the additional character locations in that word shall be filled with blanks.
3. When restricted to three words per time slot, and the message is addressed to two or more units, and eleven or more characters are sent (Text Indicator set to value 2, Associated Text C2 & C3 Present) a J7.3I/J7.3C1/J7.3C2 word sequence followed by a J7.3I/J7.3C1/J7.3C3 word sequence shall be used.

RECEIVE RULES

1. The presence of text is indicated by the Text Indicator field in the initial word.
2. Reception is complete when the received text continuation word(s) equals that specified in the Text Indicator field or when 12 seconds have elapsed since reception of the Pointer message.
3. If the received message is incomplete, the received message shall be filled with a special character to indicate incomplete data reception. The number of special characters inserted shall equal the lost data as evidenced by the missing continuation word(s). The selected fill character shall be a character not contained in the text character set.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J7.3I
WORD TITLE: POINTER INITIAL WORD

24	23	22	21	20	19	18:	17	16:	15	14	13:	12	11	10:	09	08	07:	06	05	04	03	02:	01	00:		
<---						:		:	ACTION,	:	MESSAGE	:	SUBLABEL,	:			:	WORD	:			:		:		
						:	TXI IND:	:	POINTER	:	LENGTH	:	J-SERIES	:			:	LABEL, J-SERIES	:	FORMAT	:		:	:		
						:		:		:	INDICATOR	:		:			:		:		:		:	:		
						:	2	:	3	:	3	:	3	:			:	5	:	2	:		:	:		
49	48	47	46	45	44	43	42	41	40	39	38	37	36:	35	34	33	32	31	30	29	28	27	26	25		
LONGITUDE, 0.0412 MINUTE												:	LATITUDE, 0.0412 MINUTE													
												:														
19												:	18													
					:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55:	54	53	52	51	50	
					:	TRACK NUMBER, ADDRESSEE 1															:	--->				
					:																:					
					:	15															:					

WORD DESCRIPTION

WORD NUMBER: J7.3I
WORD TITLE: POINTER INITIAL WORD

REFERENCE		BIT #		RESOLUTION, CODING, ETC
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	
1550 001	WORD FORMAT	0-	1 2	00
270 004	LABEL, J-SERIES	2-	6 5	00111
271 005	SUBLABEL, J-SERIES	7-	9 3	011
800 001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
1606 004	ACTION, POINTER	13-	15 3	
325 003	TEXT INDICATOR (TXT IND)	16-	17 2	
281 016	LATITUDE, 0.0412 MINUTE	18-	35 18	
282 012	LONGITUDE, 0.0412 MINUTE	36-	54 19	
769 017	TRACK NUMBER, ADDRESSEE 1	55-	69 15	

			FIELD CODING FOR J7.3I		(SHEET 1)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION	
1606	004	ACTION, POINTER -----		USED AS AN INDICATOR TO FURTHER ADDRESS THE POINTER MESSAGE TO AN OPERATOR WITHIN THE UNIT.	
		NO STATEMENT	0		
		WEAPONS	1	DISPLAY TO SENIOR WEAPONS COORDINATOR.	
		TRACKING	2	DISPLAY TO TRACKING OPERATOR.	
		ELECTRONIC WARFARE	3	DISPLAY TO ELECTRONIC WARFARE SUPERVISOR.	
		SPECIAL PROCESSING	4	DISPLAY TO SPECIAL PROCESSING OPERATOR.	
		UNDEFINED	5 THROUGH 7		
325	003	TEXT INDICATOR -----		INDICATES THE NUMBER OF TEXT CONTINUATION WORDS ASSOCIATED WITH THE POINTER.	
		NO ASSOCIATED TEXT	0		
		ASSOCIATED TEXT (C2 PRESENT)	1		
		ASSOCIATED TEXT (C2&C3 PRESENT)	2		
		UNDEFINED	3		
281	016	LATITUDE, 0.0412 MINUTE -----		THE PRECISION IS APPROXIMATELY 250 FEET. IN 90/131,071 DEGREE INCREMENTS.	
		0 DEGREES	0		
		+90/131,071 THROUGH +90 DEGREES NORTH	1 THROUGH 131071		
		NO STATEMENT	131072		
		-90 THROUGH -90/131,071 DEGREES SOUTH	131073 THROUGH 262143		
282	012	LONGITUDE, 0.0412 MINUTE -----		THE PRECISION IS APPROXIMATELY 250 FEET. IN 180/262,143 DEGREE INCREMENTS.	
		0 DEGREES	0		
		+180/262,143 THROUGH +180 DEGREES EAST	1 THROUGH 262143		
		NO STATEMENT	262144		
		-180 THROUGH -180/262,143 DEGREES WEST	262145 THROUGH 524287		

			FIELD CODING FOR J7.3I	(SHEET 2)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	017	TRACK NUMBER, ADDRESSEE 1 -----		THE TN OF ONE OF A NUMBER OF UNITS (I.E., JUS OR PUS) TO WHICH A MESSAGE CAN BE ADDRESSED.
		NO STATEMENT	0	
		NUMERIC	00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		ILLEGAL	00077 (OCTAL)	
		NUMERIC	00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC	00177 (OCTAL)	COLLECTIVE ADDRESS.
		NUMERIC	00200 THROUGH 07776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL	07777 (OCTAL)	
		NUMERIC	10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.

WORD MAP

WORD NUMBER: J7.3C1

WORD TITLE: POINTER ADDITIONAL ADDRESSES CONTINUATION WORD

24	23	22:	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07:	06	05	04	03	02:	01	00:	
<---			:	TRACK NUMBER, ADDRESSEE 2														:	CONTINUATION WORD			:	WORD		:
			:															:	LABEL			:	FORMAT		:
			:	15														:	5			:	2		:
49	48	47	46	45	44	43	42	41	40	39	38	37:	36	35	34	33	32	31	30	29	28	27	26	25	
TRACK NUMBER, ADDRESSEE 4												:	TRACK NUMBER, ADDRESSEE 3												
15												:	15												
			:	69	68	67:	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52:	51	50		
			:	SPARE		:	TRACK NUMBER, ADDRESSEE 5															:	---		:
			:			:																:			:
			:	3		:	15															:			:

WORD DESCRIPTION

WORD NUMBER: J7.3C1

WORD TITLE: POINTER ADDITIONAL ADDRESSES CONTINUATION WORD

REFERENCE			BIT	#	
DFI/DUI	DATA FIELD	DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD	FORMAT	0-	1 2	01
1551 001	CONTINUATION	WORD LABEL	2-	6 5	00001
769 019	TRACK	NUMBER, ADDRESSEE 2	7-	21 15	
769 020	TRACK	NUMBER, ADDRESSEE 3	22-	36 15	SAME CODING AS FOR BITS 7-21.
769 021	TRACK	NUMBER, ADDRESSEE 4	37-	51 15	SAME CODING AS FOR BITS 7-21.
769 022	TRACK	NUMBER, ADDRESSEE 5	52-	66 15	SAME CODING AS FOR BITS 7-21.
756 003	SPARE		67-	69 3	

FIELD CODING FOR J7.3C1

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	019	TRACK NUMBER, ADDRESSEE 2 -----		THE TN OF ONE OF A NUMBER OF UNITS (I.E., JUS OR PUS) TO WHICH A MESSAGE CAN BE ADDRESSED.
		NO STATEMENT	0	
		NUMERIC	00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		ILLEGAL	00077 (OCTAL)	
		NUMERIC	00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC	00177 (OCTAL)	COLLECTIVE ADDRESS.
		NUMERIC	00200 THROUGH 07776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL	07777 (OCTAL)	
		NUMERIC	10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J7.3C2
WORD TITLE: POINTER CONTINUATION WORD 2

:	24	23	22	21	20	19:	18	17	16	15	14	13:	12	11	10	09	08	07:	06	05	04	03	02:	01	00:								
:	CHARACTER #3						:	CHARACTER #2						:	CHARACTER #1						:	CONTINUATION WORD LABEL					:	WORD	:				
:							:							:							:						:	FORMAT	:				
:	6						:	6						:	6						:	5					:	2		:			
49:	48	47	46	45	44	43:	42	41	40	39	38	37:	36	35	34	33	32	31:	30	29	28	27	26	25:									
<---	:	CHARACTER #7						:	CHARACTER #6						:	CHARACTER #5						:	CHARACTER #4						:				
:	:							:							:							:							:				
:	:	6						:	6						:	6						:	6						:				
						:	69	68	67:	66	65	64	63	62	61:	60	59	58	57	56	55:	54	53	52	51	50							
						:	SPARE						:	CHARACTER #10						:	CHARACTER #9						:	CHARACTER #8					
						:							:							:							:						
:	3						:	6						:	6						:	6						:					

WORD DESCRIPTION

WORD NUMBER: J7.3C2

WORD TITLE: POINTER CONTINUATION WORD 2

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	00010
1851 001	CHARACTER #1	7-	12 6	
1851 002	CHARACTER #2	13-	18 6	SAME CODING AS FOR BITS 7-12.
1851 003	CHARACTER #3	19-	24 6	SAME CODING AS FOR BITS 7-12.
1851 004	CHARACTER #4	25-	30 6	SAME CODING AS FOR BITS 7-12.
1851 005	CHARACTER #5	31-	36 6	SAME CODING AS FOR BITS 7-12.
1851 006	CHARACTER #6	37-	42 6	SAME CODING AS FOR BITS 7-12.
1851 007	CHARACTER #7	43-	48 6	SAME CODING AS FOR BITS 7-12.
1851 008	CHARACTER #8	49-	54 6	SAME CODING AS FOR BITS 7-12.
1851 009	CHARACTER #9	55-	60 6	SAME CODING AS FOR BITS 7-12.
1851 010	CHARACTER #10	61-	66 6	SAME CODING AS FOR BITS 7-12.
756 003	SPARE	67-	69 3	

FIELD CODING FOR J7.3C2

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1851	001	CHARACTER #1 -----		CHARACTER IN A TEXT MESSAGE. DEFINED AS A STANDARDS CODE FOR GENERAL APPLICATION USE FOR COMMUNICATING FIXED OR VARIABLE FORMAT CHARACTER DATA.
		@	0	
		A-Z	1 THROUGH 26	
		[	27	
		\	28	
		]	29	
		^	30	
		_	31	
		(SPACE)	32	BLANK/NO STATEMENT.
		!	33	
		"	34	
		#	35	
		\$	36	
		%	37	
		&	38	
		'	39	APOSTROPHE.
		(	40	
		)	41	
		*	42	
		+	43	
		,	44	COMMA.
		-	45	
		.	46	
		/	47	
		0-9	48 THROUGH 57	
		:	58	
		;	59	
		<	60	
		=	61	
		>	62	
		?	63	

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: POINTER CONTINUATION WORD 3

49:	48	47	46	45	44	43:	42	41	40	39	38	37:	36	35	34	33	32	31:	30	29	28	27	26	25:	
<---	:	CHARACTER #17					:	CHARACTER #16					:	CHARACTER #15					:	CHARACTER #14					:
:	:	6					:	6					:	6					:	6					:

:	69	68	67:	66	65	64	63	62	61:	60	59	58	57	56	55:	54	53	52	51	50			
:	SPARE			:	CHARACTER #20						:	CHARACTER #19						:	CHARACTER #18				
:	3			:	6						:	6						:	6				

WORD DESCRIPTION

WORD NUMBER: J7.3C3
WORD TITLE: POINTER CONTINUATION WORD 3

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	01
1551	001	CONTINUATION WORD LABEL	2-	6 5	00011
1851	011	CHARACTER #11	7-	12 6	
1851	012	CHARACTER #12	13-	18 6	SAME CODING AS FOR BITS 7-12.
1851	013	CHARACTER #13	19-	24 6	SAME CODING AS FOR BITS 7-12.
1851	014	CHARACTER #14	25-	30 6	SAME CODING AS FOR BITS 7-12.
1851	015	CHARACTER #15	31-	36 6	SAME CODING AS FOR BITS 7-12.
1851	016	CHARACTER #16	37-	42 6	SAME CODING AS FOR BITS 7-12.
1851	017	CHARACTER #17	43-	48 6	SAME CODING AS FOR BITS 7-12.
1851	018	CHARACTER #18	49-	54 6	SAME CODING AS FOR BITS 7-12.
1851	019	CHARACTER #19	55-	60 6	SAME CODING AS FOR BITS 7-12.
1851	020	CHARACTER #20	61-	66 6	SAME CODING AS FOR BITS 7-12.
756	003	SPARE	67-	69 3	

FIELD CODING FOR J7.3C3

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1851	011	CHARACTER #11 -----		CHARACTER IN A TEXT MESSAGE. DEFINED AS A STANDARDS CODE FOR GENERAL APPLICATION USE FOR COMMUNICATING FIXED OR VARIABLE FORMAT CHARACTER DATA.
		@	0	
		A-Z	1 THROUGH 26	
		[	27	
		\	28	
		]	29	
		^	30	
		_	31	
		(SPACE)	32	BLANK/NO STATEMENT.
		!	33	
		"	34	
		#	35	
		\$	36	
		%	37	
		&	38	
		'	39	APOSTROPHE.
		(	40	
		)	41	
		*	42	
		+	43	
		,	44	COMMA.
		-	45	
		.	46	
		/	47	
		0-9	48 THROUGH 57	
		:	58	
		;	59	
		<	60	
		=	61	
		>	62	
		?	63	

MIL-STD-6016B

J7.4 MESSAGE SUMMARY

PURPOSE

The J7.4 Track Identifier Message is used to transmit special identification numbers associated with the reference TN.

DATA ELEMENT SUMMARY

<u>J7.4I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
TRACK NUMBER, REPORT/REQUEST	1
LINK 11/LINK 11B TRACK NUMBER	1
APPLICABILITY	
NATO LINK 1 TRACK NUMBER	1
APPLICABILITY	
ATDL-1 TRACK NUMBER	1
APPLICABILITY	
IJMS, SYSTEM REFERENCE NUMBER	1
APPLICABILITY	
SPARE	1
TRACK NUMBER, REFERENCE	19
LINK 11/LINK 11B TRACK NUMBER	12
SPARE	5
NATO LINK 1 TRACK NUMBER	15

<u>J7.4E0</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
ATDL-1 TRACK NUMBER	16
IJMS, SYSTEM REFERENCE NUMBER	15
SPARE	37

MIL-STD-6016B

J7.4 TRANSMIT/RECEIVE RULES

TITLE: Track Identifier Message

TRANSMIT RULES

1. The J7.4 Track Identifier message shall be transmitted either automatically or as a result of operator action.

a. The J7.4 message shall be transmitted twice at an RRN = 6 (12 seconds, 8-20 second interval) automatically or as a result of operator action when:

(1) The Link 11/11B TN, NATO Link 1 TN, ATDL-1 TN or IJMS SRN, and the Link 16 TN are initially associated.

(2) The Link 11/11B TN changes.

(3) The NATO Link 1 TN changes.

(4) The ATDL-1 TN changes.

(5) The IJMS SRN changes

b. The J7.4 message shall be transmitted one time automatically if the data transmitted are in response to a J7.4 message that requested TNs.

c. The J7.4 message that is requesting TNs shall be transmitted one time as a result of operator action.

RECEIVE RULES

There are no receive rules specified for this message.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: TRACK IDENTIFIER INITIAL WORD

24	23	22	21	20	19:	18:	17:	16:	15:	14:	13:	12	11	10:	09	08	07:	06	05	04	03	02:	01	00:
					:	:IJM:ATL:NT0:11/:	TN :	MESSAGE :		SUBLABEL, :							:	WORD :						
<---					:	:SP :SRN:TN :	TN :11B:R/R:	LENGTH :		J-SERIES :		LABEL, J-SERIES :		FORMAT :										
					:	:	:	:	:TN :	INDICATOR :							:							
					:	1 :	1 :	1 :	1 :	1 :	1 :	3	:	3	:	5	:	2	:					

:	49	48	47	46	45	44	43	42	41	40	39	38	:	37	36	35	34	33	32	31	30	29	28	27	26	25
:													:													
:	LINK 11/LINK 11B TRACK NUMBER												:	TRACK NUMBER, REFERENCE												
:													:													
:	12												:	19												

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55:	54	53	52	51	50:		
:																:						:
:	NATO LINK 1 TRACK NUMBER															:	SPARE					:
:																:						:
:	15															:	5					:

WORD DESCRIPTION

WORD NUMBER: J7.4I

WORD TITLE: TRACK IDENTIFIER INITIAL WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	00
270	004	LABEL, J-SERIES	2-	6 5	00111
271	005	SUBLABEL, J-SERIES	7-	9 3	100
800	001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
710	001	TRACK NUMBER, REPORT/REQUEST (TN R/R)	13	1	
299	001	LINK 11/LINK 11B TRACK NUMBER APPLICABILITY (11/11B TN)	14	1	
299	002	NATO LINK 1 TRACK NUMBER APPLICABILITY (NTO TN)	15	1	
299	003	ATDL-1 TRACK NUMBER APPLICABILITY (ATL TN)	16	1	
299	004	IJMS, SYSTEM REFERENCE NUMBER APPLICABILITY (IJM SRN)	17	1	
756	001	SPARE (SP)	18	1	
769	002	TRACK NUMBER, REFERENCE	19-	37 19	
269	016	LINK 11/LINK 11B TRACK NUMBER	38-	49 12	
756	005	SPARE	50-	54 5	
747	001	NATO LINK 1 TRACK NUMBER	55-	69 15	

FIELD CODING FOR J7.4I				(SHEET 1)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
710	001	TRACK NUMBER, REPORT/REQUEST -----		THIS FIELD INDICATES WHETHER OR NOT THE APPLICABLE TRACK NUMBER FIELDS ARE BEING REPORTED OR REQUESTED. THIS MESSAGE IS REPORTING THE APPLICABLE TRACK NUMBERS. THIS MESSAGE IS REQUESTING THE APPLICABLE TRACK NUMBERS.
		REPORT	0	
		REQUEST	1	
299	001	LINK 11/LINK 11B TRACK NUMBER APPLICABILITY -----		SPECIFIES WHETHER THE LINK 11/LINK 11B TRACK NUMBER IS OR IS NOT APPLICABLE TO THE MESSAGE.
		LINK 11/LINK 11B TN IS NOT APPLICABLE	0	
		LINK 11/LINK 11B TN IS APPLICABLE	1	
299	002	NATO LINK 1 TRACK NUMBER APPLICABILITY -----		SPECIFIES WHETHER THE NATO LINK 1 TRACK NUMBER IS OR IS NOT APPLICABLE TO THE MESSAGE.
		NATO LINK 1 TN IS NOT APPLICABLE	0	
		NATO LINK 1 TN IS APPLICABLE	1	
299	003	ATDL-1 TRACK NUMBER APPLICABILITY -----		SPECIFIES WHETHER THE ATDL-1 TRACK NUMBER IS OR IS NOT APPLICABLE TO THE MESSAGE.
		ATDL-1 TN IS NOT APPLICABLE	0	
		ATDL-1 TN IS APPLICABLE	1	
299	004	IJMS, SYSTEM REFERENCE NUMBER APPLICABILITY -----		SPECIFIES WHETHER THE IJMS, SYSTEM REFERENCE NUMBER IS OR IS NOT APPLICABLE TO THE MESSAGE.
		IJMS, SRN IS NOT APPLICABLE	0	
		IJMS, SRN IS APPLICABLE	1	
769	002	TRACK NUMBER, REFERENCE -----		A REFERENCE NUMBER USED TO ASSOCIATE INFORMATION AND DIRECTIVES WITH THE TRACK. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS

FIELD CODING FOR J7.4I (SHEET 2)				
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	

AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE-BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANNN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6
00111	7
01000	A
01001	B
01010	C
01011	D
01100	E
01101	F
01110	G
01111	H
10000	J
10001	K
10010	L
10011	M

FIELD CODING FOR J7.4I

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
				10100 N
				10101 P
				10110 Q
				10111 R
				11000 S
				11001 T
				11010 U
				11011 V
				11100 W
				11101 X
				11110 Y
				11111 Z
		00000	0	NO STATEMENT.
		00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		00077	63	ILLEGAL.
		00100-00175	64 THROUGH 125	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		00176	126	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		00177	127	COLLECTIVE ADDRESS.
		00200-07776	128 THROUGH 4094	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		07777	4095	ILLEGAL.
		0A000-0Z777	4096 THROUGH 16383	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		10000-17777	16384 THROUGH 20479	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		20000-27777	32768 THROUGH 36863	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL

			FIELD CODING FOR J7.4I	(SHEET 4)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		2A000-2Z777	36864 THROUGH 49151	INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS. ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		70000-77776	114688 THROUGH 118782	ASSIGNED AS IDENTIFICATION NUMBERS

			FIELD CODING FOR J7.4I	(SHEET 5)																				
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION																				
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)																					
		77777	118783	FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.																				
		7A000-ZZ777	118784 THROUGH 524287	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS. ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.																				
269	016	LINK 11/LINK 11B TRACK NUMBER -----		A SET OF REFERENCE NUMBERS USED TO ASSOCIATE DIRECTIVES AND TACTICAL INFORMATION ON LINK 11/LINK 11B.																				
		ILLEGAL	0000 (OCTAL)																					
		NUMERIC	0001 THROUGH 0076 (OCTAL)	RESERVED FOR DESIGNATING PARTICIPATING UNITS.																				
		SPARE	0077 (OCTAL)																					
		NUMERIC	0100 THROUGH 0176 (OCTAL)	RESERVED FOR DESIGNATING REPORTING UNITS.																				
		NUMERIC	0177 (OCTAL)	COLLECTIVE ADDRESS.																				
		NUMERIC	0200 THROUGH 7776 (OCTAL)	THESE TNS ARE ASSIGNED IN BLOCKS TO COMMAND AND CONTROL SYSTEMS TO BE USED FOR TACTICAL INFORMATION REPORTING.																				
		ILLEGAL	7777 (OCTAL)																					
747	001	NATO LINK 1 TRACK NUMBER -----		AN ALPHANUMERICALLY CODED REFERENCE NUMBER USED BY THE NATO AIR DEFENSE GROUND ENVIRONMENT (NADGE) SYSTEM TO IDENTIFY TRACKS. THE NUMBER CONSISTS OF FIVE CHARACTERS, TWO LETTERS FOLLOWED BY THREE DIGITS.																				
		AA000 THROUGH MM777 (ALPHANUMERIC)	00000 THROUGH 77777 (OCTAL)	THE CODE IS INTERPRETED AS LLDDD (L = LETTERS; D = DIGIT). THE LETTERS AND DIGITS ARE CODED AS FOLLOWS:																				
				<table><tr><td>OCTAL CODE</td><td></td><td>LETTER</td><td>DIGIT</td></tr><tr><td>0</td><td>=</td><td>A</td><td>0</td></tr><tr><td>1</td><td>=</td><td>E</td><td>1</td></tr><tr><td>2</td><td>=</td><td>G</td><td>2</td></tr><tr><td>3</td><td>=</td><td>H</td><td>3</td></tr></table>	OCTAL CODE		LETTER	DIGIT	0	=	A	0	1	=	E	1	2	=	G	2	3	=	H	3
OCTAL CODE		LETTER	DIGIT																					
0	=	A	0																					
1	=	E	1																					
2	=	G	2																					
3	=	H	3																					

FIELD CODING FOR J7.4I				(SHEET 6)	
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION	
747	001	NATO LINK 1 TRACK NUMBER -----	(CONTINUED)		
				4	= J 4
				5	= K 5
				6	= L 6
				7	= M 7

.....

WORD TITLE: TRACK IDENTIFIER EXTENSION WORD

24	23	22	21	20	19	18:	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02:	01	00:	
							:																:	WORD	:
<---							:	ATDL-1 TRACK NUMBER															:	FORMAT	:
							:																:		:
							:	16															:	2	:

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33:	32	31	30	29	28	27	26	25
<---																	:							
																	:	IJMS, SYSTEM REFERENCE NUMBER						
																	:							
																	:	15						

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50
:																				
:																				
:											SPARE									
:																				
:											37									

WORD DESCRIPTION

WORD NUMBER: J7.4E0

WORD TITLE: TRACK IDENTIFIER EXTENSION WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	10
746 002	ATDL-1 TRACK NUMBER	2-	17 16	
352 001	IJMS, SYSTEM REFERENCE NUMBER	18-	32 15	
756 037	SPARE	33-	69 37	

FIELD CODING FOR J7.4E0 (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
746	002	ATDL-1 TRACK NUMBER ----- AA000 THROUGH QH777 (ALPHANUMERIC)	000000 THROUGH 177777 (OCTAL)	THIS TN IS CODED INTO FIVE GROUPS TO ALLOW THE ATDL-1 TN TO BE DERIVED. GROUP 1 IS THE MOST SIGNIFICANT 4 BITS, AND GROUPS 2, 3, 4 AND 5 CONTAIN 3 BITS EACH. THE ATDL-1 TN IS DERIVED BY INTERPRETING THE GROUPS AS FOLLOWS: GROUP 1 GROUP 2 GROUP 3,4,5 (IN DECIMAL NOTATION) 0=A 0=A 0=0 1=B 1=B 1=1 2=C 2=C 2=2 3=D 3=D 3=3 4=E 4=E 4=4 5=F 5=F 5=5 6=G 6=G 6=6 7=H 7=H 7=7 8=I 9=J 10=K 11=L 12=M 13=N 14=P 15=Q
352	001	IJMS, SYSTEM REFERENCE NUMBER ----- ILLEGAL NUMERIC ILLEGAL NUMERIC NUMERIC NUMERIC	00000 (OCTAL) 00001 THROUGH 00076 (OCTAL) 00077 (OCTAL) 00100 THROUGH 00176 (OCTAL) 00177 (OCTAL) 00200 THROUGH 07776 (OCTAL)	A STANDARD SYSTEM REFERENCE NUMBER (SRN) CONSISTING OF FIVE OCTAL DIGITS USED TO IDENTIFY ALL SYSTEM ENTITIES ON IJMS. ASSIGNED AS IDENTIFICATION NUMBERS FOR PUS. ASSIGNED AS IDENTIFICATION NUMBERS FOR RUS. COLLECTIVE ADDRESS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JTIDS/MIDS EQUIPPED UNITS. SRNS NOT ASSIGNED TO JTIDS/MIDS EQUIPPED UNITS ARE ALLOCATED IN

FIELD CODING FOR J7.4E0

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

352	001	IJMS, SYSTEM REFERENCE NUMBER	(CONTINUED)	
-----	-----	-------------------------------	-------------	--

NUMERIC
NUMERIC

07777 (OCTAL)
10000 THROUGH 77776
(OCTAL)

BLOCKS TO BE USED FOR TACTICAL
INFORMATION REPORTING.
RESERVED FOR SPECIAL PURPOSE.
ASSIGNED AS IDENTIFICATION NUMBERS
FOR JTIDS/MIDS EQUIPPED UNITS.
SRNS NOT ASSIGNED TO JTIDS/MIDS
EQUIPPED UNITS ARE ALLOCATED IN
BLOCKS TO BE USED FOR TACTICAL
INFORMATION REPORTING.

ILLEGAL

77777 (OCTAL)

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

J7.5 MESSAGE SUMMARY

PURPOSE

The J7.5 IFF/SIF Management Message is used to transmit IFF/SIF information or a special code on a referenced track. Provisions are available to obtain the most current information by exchanging, clearing, or updating IFF/SIF data between units within the interface.

DATA ELEMENT SUMMARY

<u>J7.5I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
ACTION, IFF/SIF MANAGEMENT	3
MODE IV INDICATOR	1
APPLICABILITY	
MODE IV INDICATOR	2
TRACK NUMBER, REFERENCE	19
MODE I CODE APPLICABILITY(1)***	
SPECIAL CODE I	1
APPLICABILITY(1)*****	
MODE II CODE APPLICABILITY(1)**	
SPECIAL CODE II	1
APPLICABILITY(1)*****	
MODE III CODE APPLICABILITY(1)*	
SPECIAL CODE III	1
APPLICABILITY(1)*****	
MODE I CODE(5)*****	
SPECIAL CODE I(5)	5
SPARE(5)*****	
MODE II CODE(12)*****	
SPECIAL CODE II(12)	12
SPARE(12)*****	
MODE III CODE(12)*****	
SPECIAL CODE III(12)	12
SPARE(12)*****	

MIL-STD-6016B

J7.5 TRANSMIT/RECEIVE RULES

TITLE: IFF/SIF Management Message

TRANSMIT RULES

1. The J7.5 IFF/SIF Management (ACT = 0) Clear IFF/SIF message shall be transmitted once as a result of operator action.
2. The J7.5 IFF/SIF Management (ACT = 1) IFF/SIF Difference Report message shall be transmitted only by nonR² JUs one time automatically as specified in Table 1.7-10, Volume II, Chapter 1 or as a result of operator action, or when local data are changed, or in response to a J7.5 (ACT = 2) message received from the R² unit.
3. The J7.5 IFF/SIF Management (ACT = 2) IFF/SIF Update Request message shall be transmitted one time as a result of operator action.
4. The J7.5 IFF/SIF Management (ACT = 3) Special Code message with data not equal to value 0 shall be transmitted periodically at an RRN = 2(3.2 minutes, 2.4-4 minute interval) as a result of operator action.
5. The J7.5 (ACT = 3) message with all zero data shall be transmitted one time as a result of operator action.

RECEIVE RULES

The J7.5 (ACT = 1) message shall be processed upon receipt in accordance with Table 4.7-8.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: IFF/SIF MANAGEMENT INITIAL WORD

	24	23	22	21	20	19:	18	17:	16:	15	14	13:	12	11	10:	09	08	07:	06	05	04	03	02:	01	00:
<---						:		:	IV	:	ACTION,	:	MESSAGE	:	SUBLABEL,	:							:	WORD	:
						:	M4 IND	:	APP:	:	IFF/SIF	:	LENGTH	:	J-SERIES	:							:	FORMAT	:
						:		:		:	MANAGEMENT	:	INDICATOR	:		:							:		:
						:	2	:	1	:	3	:	3	:	3	:				5			:	2	:

49	48	47	46:	45	44	43	42	41:	40:	39:	38:	37	36	35	34	33	32	31	30	29	28	27	26	25
<---			:	MODE I CODE				:	III:II	:	I	:												
<---			:	SPECIAL CODE I				:	APP:APP:APP:															
<---			:	SPARE				:	III:II	:	I	:	TRACK NUMBER, REFERENCE											
<---			:	5				:	1	:	1	:	1	:	19									

:	69	68	67	66	65	64	63	62	61	60	59	58:	57	56	55	54	53	52	51	50	
:	MODE III CODE												:	MODE II CODE							
:	SPECIAL CODE III												:	SPECIAL CODE II							
:	SPARE												:	SPARE							
:	12												:	12							

WORD DESCRIPTION

WORD NUMBER: J7.5I

WORD TITLE: IFF/SIF MANAGEMENT INITIAL WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	00
270	004	LABEL, J-SERIES	2-	6 5	00111
271	005	SUBLABEL, J-SERIES	7-	9 3	101
800	001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
1606	006	ACTION, IFF/SIF MANAGEMENT	13-	15 3	
1610	004	MODE IV INDICATOR	16	1	
		APPLICABILITY (IV APP)			
298	001	MODE IV INDICATOR (M4 IND)	17-	18 2	
769	002	TRACK NUMBER, REFERENCE	19-	37 19	
1610	001	MODE I CODE APPLICABILITY	38	1	
		(I APP)			
296	001	SPECIAL CODE I APPLICABILITY	38	1	
		(I)			
1610	002	MODE II CODE APPLICABILITY	39	1	
		(II APP)			
296	002	SPECIAL CODE II APPLICABILITY	39	1	
		(II)			
1610	003	MODE III CODE APPLICABILITY	40	1	
		(III APP)			
296	003	SPECIAL CODE III APPLICABILITY	40	1	
		(III)			
293	003	MODE I CODE	41-	45 5	
1752	001	SPECIAL CODE I	41-	45 5	
756	005	SPARE	41-	45 5	
294	002	MODE II CODE	46-	57 12	
1752	002	SPECIAL CODE II	46-	57 12	
756	012	SPARE	46-	57 12	
295	002	MODE III CODE	58-	69 12	
1752	003	SPECIAL CODE III	58-	69 12	
756	012	SPARE	58-	69 12	

SAME CODING AS FOR BITS 46-57.

FIELD CODING FOR J7.5I

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1606	006	ACTION, IFF/SIF MANAGEMENT -----		USED TO DESCRIBE THE ACTION REQUIRED BY THE SOURCE TRACK NUMBER TO MANAGE IFF/SIF DATA ON THE INTERFACE. THE UNIT SPECIFIED IN THE SOURCE TN DIRECTS THAT IFF/SIF DATA (MODES I, II, III, AND/OR IV) FOR THE TRACK SPECIFIED IN THE REFERENCE TN WILL NOT BE REPORTED ON THE INTERFACE UNTIL UPDATED IFF/SIF DATA IS RE-ENTERED (MANUALLY, AUTOMATICALLY OR FROM DATA LINK REPORTS).
		CLEAR IFF/SIF	0	
		IFF/SIF DIFFERENCE REPORT	1	THE UNIT SPECIFIED IN THE SOURCE TN HAS DIFFERENT IFF/SIF DATA (MODE I, II, III, AND/OR IV) FOR THE TRACK SPECIFIED IN THE REFERENCE TN. THE MODE FIELDS MUST BE SET TO THE UNIT'S LOCAL IFF/SIF DATA.
		IFF/SIF UPDATE REQUEST	2	THE UNIT SPECIFIED IN THE SOURCE TN IS REQUESTING UPDATED IFF/SIF DATA (MODE I, II, III, AND/OR IV) FOR THE TRACK SPECIFIED IN THE REFERENCE TN FROM THE OTHER UNITS IN THE INTERFACE.
		SPECIAL CODE	3	THE DATA IN THIS MESSAGE ARE SPECIAL CODES AND ARE NOT TO BE INTERPRETED AS IFF DATA.
		UNDEFINED	4 THROUGH 7	
1610	004	MODE IV INDICATOR APPLICABILITY -----		SPECIFIES WHETHER THE MODE IV INDICATOR IS OR IS NOT APPLICABLE TO THE MESSAGE.
		MODE IV INDICATOR IS NOT APPLICABLE	0	
		MODE IV INDICATOR IS APPLICABLE	1	
298	001	MODE IV INDICATOR -----		THE MODE IV BEACON REPLY.
		NOT INTERROGATED/NO STATEMENT	0	
		INTERROGATED, NO RESPONSE	1	
		INTERROGATED, INVALID RESPONSE	2	

FIELD CODING FOR J7.5I			(SHEET 2)	
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
298	001	MODE IV INDICATOR ----- INTERROGATED, VALID RESPONSE	(CONTINUED) 3	
769	002	TRACK NUMBER, REFERENCE -----		A REFERENCE NUMBER USED TO ASSOCIATE INFORMATION AND DIRECTIVES WITH THE TRACK. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE-BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANNN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.
				CODING CHARACTER
				00000 0
				00001 1
				00010 2
				00011 3
				00100 4
				00101 5
				00110 6
				00111 7
				01000 A
				01001 B
				01010 C

FIELD CODING FOR J7.5I

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
				01011 D
				01100 E
				01101 F
				01110 G
				01111 H
				10000 J
				10001 K
				10010 L
				10011 M
				10100 N
				10101 P
				10110 Q
				10111 R
				11000 S
				11001 T
				11010 U
				11011 V
				11100 W
				11101 X
				11110 Y
				11111 Z
		00000	0	NO STATEMENT.
		00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		00077	63	ILLEGAL.
		00100-00175	64 THROUGH 125	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		00176	126	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		00177	127	COLLECTIVE ADDRESS.
		00200-07776	128 THROUGH 4094	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		07777	4095	ILLEGAL.
		0A000-0Z777	4096 THROUGH 16383	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		10000-17777	16384 THROUGH 20479	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL

			FIELD CODING FOR J7.5I	(SHEET 4)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		1A000-1Z777	20480 THROUGH 32767	INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS. ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		20000-27777	32768 THROUGH 36863	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS

		FIELD CODING FOR J7.5I		(SHEET 5)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		6A000-6Z777	102400 THROUGH 114687	FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		70000-77776	114688 THROUGH 118782	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		7A000-ZZ777	118784 THROUGH 524287	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
				ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
1610	001	MODE I CODE APPLICABILITY -----		SPECIFIES WHETHER THE MODE I CODE IS OR IS NOT APPLICABLE TO THE MESSAGE.
		MODE I CODE IS NOT APPLICABLE	0	
		MODE I CODE IS APPLICABLE	1	
296	001	SPECIAL CODE I APPLICABILITY -----		SPECIFIES WHETHER THE SPECIAL CODE I IS OR IS NOT APPLICABLE TO THE MESSAGE.
		SPECIAL CODE I IS NOT APPLICABLE	0	
		SPECIAL CODE I IS APPLICABLE	1	
1610	002	MODE II CODE APPLICABILITY -----		SPECIFIES WHETHER THE MODE II CODE IS OR IS NOT APPLICABLE TO THE MESSAGE.
		MODE II CODE IS NOT APPLICABLE	0	
		MODE II CODE IS APPLICABLE	1	

FIELD CODING FOR J7.5I				(SHEET 6)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
296	002	SPECIAL CODE II APPLICABILITY -----		SPECIFIES WHETHER THE SPECIAL CODE II IS OR IS NOT APPLICABLE TO THE MESSAGE.
		SPECIAL CODE II IS NOT APPLICABLE	0	
		SPECIAL CODE II IS APPLICABLE	1	
1610	003	MODE III CODE APPLICABILITY -----		SPECIFIES WHETHER THE MODE III CODE IS OR IS NOT APPLICABLE TO THE MESSAGE.
		MODE III CODE IS NOT APPLICABLE	0	
		MODE III CODE IS APPLICABLE	1	
296	003	SPECIAL CODE III APPLICABILITY -----		SPECIFIES WHETHER THE SPECIAL CODE III IS OR IS NOT APPLICABLE TO THE MESSAGE.
		SPECIAL CODE III IS NOT APPLICABLE	0	
		SPECIAL CODE III IS APPLICABLE	1	
293	003	MODE I CODE -----		PROVIDES MODE I BEACON REPLY INFORMATION. WITHIN THE MODE FIELD, SIF CODES ARE IN THE ORDER A4 A2 A1 B2 B1. THE LEAST SIGNIFICANT DIGIT CANNOT BE GREATER THAN 3.
		0 (NO STATEMENT)	00 (OCTAL)	THIS CODE CANNOT BE ASSIGNED AS AN OPERATIONAL CODE. INDICATES THERE ARE NO DATA FOR TRANSMISSION.
		1	01 (OCTAL)	
		2	02 (OCTAL)	
		3	03 (OCTAL)	
		4	10 (OCTAL)	
		5	11 (OCTAL)	
		6	12 (OCTAL)	
		7	13 (OCTAL)	
		8	20 (OCTAL)	
		9	21 (OCTAL)	
		10	22 (OCTAL)	
		11	23 (OCTAL)	
		12	30 (OCTAL)	

FIELD CODING FOR J7.5I

(SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
293	003	MODE I CODE -----	(CONTINUED)	
		13	31 (OCTAL)	
		14	32 (OCTAL)	
		15	33 (OCTAL)	
		16	40 (OCTAL)	
		17	41 (OCTAL)	
		18	42 (OCTAL)	
		19	43 (OCTAL)	
		20	50 (OCTAL)	
		21	51 (OCTAL)	
		22	52 (OCTAL)	
		23	53 (OCTAL)	
		24	60 (OCTAL)	
		25	61 (OCTAL)	
		26	62 (OCTAL)	
		27	63 (OCTAL)	
		28	70 (OCTAL)	
		29	71 (OCTAL)	
		30	72 (OCTAL)	
		31	73 (OCTAL)	
1752	001	SPECIAL CODE I -----		A SPECIAL CODE USED FOR IDENTIFICATION.
		0 THROUGH 37 (OCTAL)	00 THROUGH 37 (OCTAL)	
294	002	MODE II CODE -----		PROVIDES MODE II BEACON REPLY INFORMATION.
		NO STATEMENT	0	THIS CODE CANNOT BE ASSIGNED AS AN OPERATIONAL CODE. INDICATES THERE ARE NO DATA FOR TRANSMISSION.
		1 THROUGH 7777 (OCTAL)	0001 THROUGH 7777 (OCTAL)	WITHIN THE FIELD, SIF CODES ARE IN THE ORDER A, B, C, D WITH EACH TRIAD IN THE ORDER 4, 2, 1.
1752	002	SPECIAL CODE II -----		A SPECIAL CODE USED FOR IDENTIFICATION.
		0 THROUGH 7777 (OCTAL)	0000 THROUGH 7777 (OCTAL)	
295	002	MODE III CODE -----		PROVIDES MODE III BEACON REPLY INFORMATION.
		NO STATEMENT	0	THIS CODE CANNOT BE ASSIGNED AS AN OPERATIONAL CODE. INDICATES THERE ARE NO DATA FOR TRANSMISSION.

			FIELD CODING FOR J7.5I	(SHEET 8)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
295	002	MODE III CODE	(CONTINUED)	

		1 THROUGH 7777 (OCTAL)	0001 THROUGH 7777 (OCTAL)	WITHIN THE FIELD, SIF CODES ARE IN THE ORDER A, B, C, D WITH EACH TRIAD IN THE ORDER 4, 2, 1.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

J7.6 MESSAGE SUMMARY

PURPOSE

The J7.6 Filter Management Message is used to report filter definitions, filter descriptions, and filter deletions. Filter definition reports describe the filter parameters requested to be implemented. Filter description reports indicate the filter parameters currently implemented by a system. Filter delete reports are requests to cancel currently implemented filters.

DATA ELEMENT SUMMARY

<u>J7.6I</u>		<u>J7.6I (Continued)</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	FRIEND IDENTITY FILTER INDICATOR	1
LABEL, J-SERIES	5	NEUTRAL IDENTITY FILTER INDICATOR	1
SUBLABEL, J-SERIES	3	SUSPECT IDENTITY FILTER INDICATOR	1
MESSAGE LENGTH INDICATOR	3	HOSTILE IDENTITY FILTER INDICATOR	1
TRACK NUMBER, ADDRESSEE	15	SPARE IDENTITY FILTER INDICATOR	1
ACTION, FILTER MANAGEMENT	3	FILTER NUMBER	4
ENV/CAT UNKNOWN FILTER INDICATOR	1	GEOGRAPHIC AREA FILTERED	5
ENV/CAT SPACE FILTER INDICATOR	1		
ENV/CAT AIR FILTER INDICATOR	1		
ENV/CAT SURFACE (MARITIME) FILTER INDICATOR	1		
ENV/CAT SUBSURFACE (MARITIME) FILTER INDICATOR	1		
ENV/CAT LAND (GROUND) POINT FILTER INDICATOR	1		
ENV/CAT LAND (GROUND) TRACK FILTER INDICATOR	1		
SPARE ENV/CAT FILTER INDICATOR	1		
SPECIAL PROCESSING FILTER INDICATOR	1		
SIMULATION FILTER INDICATOR	1		
DISUSED	1		
REFERENCE POINT FILTER INDICATOR	1		
ELECTRONIC WARFARE FILTER INDICATOR	1		
SPARE	1		
LINE/AREA CONTINUATION INDICATOR, 1	1		
DISUSED	2		
FILTER UNIT TYPE	3		
SLAVED INDICATOR	1		
SPARE	1		
PENDING IDENTITY FILTER INDICATOR	1		
UNKNOWN IDENTITY FILTER INDICATOR	1		
ASSUMED FRIEND IDENTITY FILTER INDICATOR	1		

<u>J7.6E0</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
SPARE	3
LATITUDE, 0.0103 MINUTE	20
SPARE	3
LONGITUDE, 0.0103 MINUTE	21
ALTITUDE, 100 FT 1	10
ALTITUDE, 100 FT 2	10
SPARE	1

<u>J7.6C1</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
CONTINUATION WORD LABEL	5
BEARING, 1	9
BEARING, 2	9
SQUARE/CIRCLE SWITCH, 1	2
AXIS ORIENTATION, 1	8
AREA MAJOR AXIS, 1	6
AREA MINOR AXIS, 1	6
SPARE	1
SQUARE/CIRCLE SWITCH, 2	2
AXIS ORIENTATION, 2	8
AREA MAJOR AXIS, 2	6
AREA MINOR AXIS, 2	6

MIL-STD-6016B

J7.6 MESSAGE SUMMARY (Continued)

DATA ELEMENT SUMMARY (Continued)

<u>J7.6C2</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
CONTINUATION WORD LABEL	5
DELTA LATITUDE, 0.0313 MINUTE	14
1	
DELTA LONGITUDE, 0.0313 MINUTE	14
1	
END POINT, 1	1
SPARE	2
DELTA LATITUDE, 0.0313 MINUTE	14
2	
DELTA LONGITUDE, 0.0313 MINUTE	14
2	
END POINT, 2	1
SPARE	3

<u>J7.6C3</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
CONTINUATION WORD LABEL	5
TRACK NUMBER, RELATED	19
COURSE	9
SPEED	11
SPARE	24

MIL-STD-6016B

J7.6 TRANSMIT/RECEIVE RULES

TITLE: Filter Management

TRANSMIT RULES

1. The J7.6 Filter Management (ACT = 0) Filter Implementation Request message shall be transmitted one time by a JU to define a filter to be inserted by another JU.
2. The J7.6 Filter Management (ACT = 1) Filter Description Report message shall be transmitted one time as a result of operator action or automatically in response to a J7.1 (ACT = 0) Data Update Request by Request Indicator message with the Filter Number field set to a specific number.
3. A J7.6 (ACT = 1) message shall be transmitted for each filter inserted in a JU's own system in response to a J7.1 (ACT = 0) message with the Filter Number field set to 15.
4. The J7.6 Filter Management (ACT = 2) Delete Filter Request/Report message shall be transmitted one time by a JU to request another JU to delete its filter(s) or by an originating JU to report it has deleted a filter.
5. Table J7-3 specifies the word sequences to be used for describing various filter types.
6. Table J7-4 specifies the setting of the Altitude 100 Ft, 1 and Altitude 100 Ft, 2 data elements to specify the volume to be filtered.

RECEIVE RULES

Table J7-4 specifies the interpretation of the Altitude 100 Ft, 1 and Altitude 100 Ft, 2 data elements.

TABLE J7-3. Required Word Sequences for Filter Management

<u>J7.6 FILTER MANAGEMENT WORDS</u>	
J7.6I Filter Management Initial Word J7.6E0 Filter Management Extension Word J7.6C1 Filter Management Continuation Word 1 J7.6C2 Filter Management Continuation Word 2 J7.6C3 Filter Management Continuation Word 3	
<u>FILTER TYPE</u>	<u>WORD SEQUENCES</u>
Environment/Category and/or Identity filter only (no geography defined)	J7.6I
Line (3 points or less)	J7.6I/J7.6E0/J7.6C2
Line (4 or more points) or a multi-sided figure that is not a Square, Rectangle, Circle, or Ellipse	Multiple J7.6I/J7.6E0/J7.6C2 word sequences forming separate J7.6 messages.
Square, Rectangle, Nested Rectangle, Circle, Annulus, Sector of a Circle, or Sector of an Annulus	J7.6I/J7.6E0/J7.6C1
Moving/Slaved Area	J7.6I/J7.6E0/J7.6C1 followed by J7.6I/J7.6C3 when only three words are allowed in a time slot or J7.6I/J7.6E0/J7.6C1/J7.6C3 when more than three words are allowed in a time slot.

Table J7-4. Setting and Interpretation of Altitude for Filter Management

Case	Altitude 100 Ft, 1	Altitude 100 Ft, 2	Meaning
1	Altitude specified	No Statement	Illegal. Discard message.
2	Altitude specified	Altitude specified	Apply defined Filter inclusively within the altitude band specified.
3	No Statement	Altitude specified	Illegal. Discard message.
4	No Statement	No Statement	Altitude shall not be used as a Filter parameter.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: FILTER MANAGEMENT INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00		
TRACK NUMBER, ADDRESSEE												:	MESSAGE		:	SUBLABEL,		:	LABEL, J-SERIES				:	WORD		:
												:	LENGTH		:	J-SERIES		:					:	FORMAT		:
												:	INDICATOR		:			:					:			:
15												:	3		:	3		:	5				:	2		:

49	48:	47	46:	45:	44:	43:	42:	41:	40:	39:	38:	37:	36:	35:	34:	33:	32:	31:	30	29	28:	27	26	25		
FILTER :			:	LAC:		:	FIL:	FIL:		:	FIL:	FIL:	FIL:	FIL:	FIL:	FIL:	FIL:	FIL:		ACTION,	:					
UNIT :	DUD	:	1	:SP	:EW	:	REF:	DUD:	SIM:	SPI:	SP	:	TKS:	PTS:	SUB:	SUR:	AIR:	SPC:	UNK:	FILTER	:	----	>			
TYPE :			:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	MANAGEMENT	:				
3	:	2	:	1	:	1	:	1	:	1	:	1	:	1	:	1	:	1	:	1	:	3	:			

[illegible]

5.2-202

MIL-STD-6016B

WORD DESCRIPTION

WORD NUMBER: J7.6I

WORD TITLE: FILTER MANAGEMENT INITIAL WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	00
270	004	LABEL, J-SERIES	2-	6 5	00111
271	005	SUBLABEL, J-SERIES	7-	9 3	110
800	001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
769	006	TRACK NUMBER, ADDRESSEE	13-	27 15	
1606	007	ACTION, FILTER MANAGEMENT	28-	30 3	
1745	001	ENV/CAT UNKNOWN FILTER INDICATOR (FIL UNK)	31	1	
1745	002	ENV/CAT SPACE FILTER INDICATOR (FIL SPC)	32	1	SAME CODING AS FOR BIT 31.
1745	003	ENV/CAT AIR FILTER INDICATOR (FIL AIR)	33	1	SAME CODING AS FOR BIT 31.
1745	004	ENV/CAT SURFACE (MARITIME) FILTER INDICATOR (FIL SUR)	34	1	SAME CODING AS FOR BIT 31.
1745	005	ENV/CAT SUBSURFACE (MARITIME) FILTER INDICATOR (FIL SUB)	35	1	SAME CODING AS FOR BIT 31.
1745	006	ENV/CAT LAND (GROUND) POINT FILTER INDICATOR (FIL PTS)	36	1	SAME CODING AS FOR BIT 31.
1745	007	ENV/CAT LAND (GROUND) TRACK FILTER INDICATOR (FIL TKS)	37	1	SAME CODING AS FOR BIT 31.
1745	008	SPARE ENV/CAT FILTER INDICATOR (FIL SP)	38	1	
1745	009	SPECIAL PROCESSING FILTER INDICATOR (FIL SPI)	39	1	
1745	010	SIMULATION FILTER INDICATOR (FIL SIM)	40	1	
758	001	DISUSED (DUD)	41	1	
1745	014	REFERENCE POINT FILTER INDICATOR (FIL REF)	42	1	
1745	013	ELECTRONIC WARFARE FILTER INDICATOR (FIL EW)	43	1	
756	001	SPARE (SP)	44	1	
1720	002	LINE/AREA CONTINUATION INDICATOR, 1 (LAC1)	45	1	
758	002	DISUSED (DUD)	46-	47 2	
1520	001	FILTER UNIT TYPE	48-	50 3	
1716	001	SLAVED INDICATOR (SLV IND)	51	1	

WORD DESCRIPTION

WORD NUMBER: J7.6I

WORD TITLE: FILTER MANAGEMENT INITIAL WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
756 001		SPARE (SP)	52	1	
1745 015		PENDING IDENTITY FILTER INDICATOR (FIL PEN)	53	1	
1745 016		UNKNOWN IDENTITY FILTER INDICATOR (FIL UNK)	54	1	SAME CODING AS FOR BIT 53.
1745 017		ASSUMED FRIEND IDENTITY FILTER INDICATOR (FIL AFR)	55	1	SAME CODING AS FOR BIT 53.
1745 018		FRIEND IDENTITY FILTER INDICATOR (FIL FRD)	56	1	SAME CODING AS FOR BIT 53.
1745 019		NEUTRAL IDENTITY FILTER INDICATOR (FIL NEU)	57	1	SAME CODING AS FOR BIT 53.
1745 020		SUSPECT IDENTITY FILTER INDICATOR (FIL SUS)	58	1	SAME CODING AS FOR BIT 53.
1745 021		HOSTILE IDENTITY FILTER INDICATOR (FIL HOS)	59	1	SAME CODING AS FOR BIT 53.
1745 022		SPARE IDENTITY FILTER INDICATOR (FIL SID)	60	1	
1747 001		FILTER NUMBER	61- 64	4	
1748 001		GEOGRAPHIC AREA FILTERED	65- 69	5	

			FIELD CODING FOR J7.6I	(SHEET 1)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	006	TRACK NUMBER, ADDRESSEE -----		THE TN OF A UNIT (I.E., JU OR PU) TO WHICH A MESSAGE IS ADDRESSED.
		NO STATEMENT NUMERIC	0 00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		ILLEGAL NUMERIC	00077 (OCTAL) 00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC	00177 (OCTAL)	COLLECTIVE ADDRESS.
		NUMERIC	00200 THROUGH 07776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL NUMERIC	07777 (OCTAL) 10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
1606	007	ACTION, FILTER MANAGEMENT -----		
		FILTER IMPLEMENTATION REQUEST	0	THE SOURCE TN REQUESTS THE ADDRESSEE TN IMPLEMENT THE FILTER DEFINED IN THIS SOURCE MESSAGE.
		FILTER DESCRIPTION REPORT	1	THE SOURCE TN IS DESCRIBING THE FILTER THAT HAS BEEN IMPLEMENTED BY FILTER TYPE AND NUMBER.
		DELETE FILTER REQUEST/ REPORT	2	THE SOURCE TN REQUESTS THE ADDRESSEE TN DELETE THE FILTER SPECIFIED IN THE FILTER NUMBER FIELD. WHEN THE ADDRESSEE TN IS 00177 (OCTAL), THE SOURCE TN HAS DELETED THE FILTER SPECIFIED IN THE FILTER NUMBER FIELD.
		UNDEFINED	3 THROUGH 7	
1745	001	ENV/CAT UNKNOWN FILTER INDICATOR -----		THIS INDICATOR IS USED TO DESCRIBE AN ENVIRONMENT/CATEGORY FILTER.

FIELD CODING FOR J7.6I				(SHEET 2)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1745	001	ENV/CAT UNKNOWN FILTER INDICATOR	(CONTINUED)	

		NO STATEMENT	0	
		FILTER	1	
1745	008	SPARE ENV/CAT FILTER INDICATOR		THIS INDICATOR IS RESERVED FOR USE AS AN ENVIRONMENT/CATEGORY FILTER INDICATOR FOR ENVIRONMENT/CATEGORY VALUES SIX AND SEVEN WHICH ARE CURRENTLY UNDEFINED. THIS INDICATOR IS ALWAYS SET TO ZERO.

		NO STATEMENT	0	
		FILTER	1	
1745	009	SPECIAL PROCESSING FILTER INDICATOR		THIS INDICATOR IS USED TO DESCRIBE A SPECIAL PROCESSING FILTER.

		NO STATEMENT	0	
		FILTER	1	
1745	010	SIMULATION FILTER INDICATOR		THIS INDICATOR IS USED IN CONJUNCTION WITH THE OTHER FILTER INDICATORS TO DESCRIBE FILTERS FOR SIMULATED DATA.

		NO STATEMENT	0	
		FILTER	1	
1745	014	REFERENCE POINT FILTER INDICATOR		THIS INDICATOR IS USED TO DESCRIBE A FILTER FOR ALL REFERENCE POINTS.

		NO STATEMENT	0	
		FILTER	1	
1745	013	ELECTRONIC WARFARE FILTER INDICATOR		THIS INDICATOR IS USED IN CONJUNCTION WITH THE OTHER FILTER INDICATORS TO DESCRIBE FILTERS FOR ELECTRONIC WARFARE DERIVED DATA.

		NO STATEMENT	0	
		FILTER	1	
1720	002	LINE/AREA CONTINUATION INDICATOR, 1		THIS FIELD IS USED TO DESCRIBE THE RELATIONSHIP OF THE POINTS' LOCATION DESCRIBED IN THE EXTENSION WORD OF THIS MESSAGE

FIELD CODING FOR J7.6I

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1720	002	LINE/AREA CONTINUATION INDICATOR, 1 -----	(CONTINUED)	
		NO STATEMENT	0	WITH POINTS THAT HAVE BEEN DESCRIBED IN PREVIOUS MESSAGES. IT ALSO INDICATES THAT THE POINTS DESCRIBED IN THIS MESSAGE SHOULD BE JOINED TO FORM A SEGMENTED LINE, OR A MULTI-SIDED AREA WHEN THE FIRST AND LAST POINT LOCATIONS COINCIDE.
		LINE/AREA CONTINUATION	1	THE LATITUDE AND LONGITUDE FIELDS IN THE EXTENSION WORD OF THIS MESSAGE DESCRIBE A POINT THAT IS COINCI- DENT WITH THE LAST POINT TRANS- MITTED IN A PREVIOUS MESSAGE. THE POINTS DESCRIBED IN THIS MESSAGE SHOULD BE JOINED TO FORM A SEG- MENTED LINE OR, WHEN THE FIRST AND LAST POINT LOCATIONS COINCIDE, A MULTI-SIDED AREA.
1520	001	FILTER UNIT TYPE -----		INDICATES WHETHER THE REQUESTED OR REPORTED FILTER APPLIES TO AN INDIVIDUAL UNIT OR FORWARDED DATA. FILTER(ING) OWN UNIT REPORTS.
		INDIVIDUAL UNIT	0	FILTER(ING) REPORTS FORWARDED FROM LINK 16 TO LINK 11.
		FJUA	1	FILTER(ING) REPORTS FORWARDED FROM LINK 16 TO LINK 11B.
		FJUB	2	FILTER(ING) REPORTS FORWARDED FROM LINK 16 TO LINK 11B.
		FJUAB	3	FILTER(ING) REPORTS FORWARDED FROM LINK 16 TO LINK 11 AND LINK 11B.
		UNDEFINED	4 THROUGH 7	
1716	001	SLAVED INDICATOR -----		USED TO INDICATE WHETHER OR NOT THE POINT DESCRIBED IN THE MESSAGE IS SLAVED TO THE UNIT SPECIFIED IN THE RELATED TN FIELD.
		NOT SLAVED	0	THE POINT DESCRIBED IN THIS MESSAGE IS NOT SLAVED TO ANY UNIT.
		SLAVED	1	THE POINT DESCRIBED IN THIS MESSAGE IS SLAVED TO THE UNIT SPECIFIED IN THE RELATED TN FIELD.

5.2-207

MIL-STD-6016B

FIELD CODING FOR J7.6I

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1745	015	PENDING IDENTITY FILTER INDICATOR ----- NO STATEMENT FILTER	0 1	THIS INDICATOR IN CONJUNCTION WITH THE OTHER FILTER INDICATORS DESCRIBE IDENTITY FILTERS.
1745	022	SPARE IDENTITY FILTER INDICATOR ----- NO STATEMENT FILTER	0 1	THIS INDICATOR IS RESERVED FOR USE AS AN IDENTITY FILTER INDICATOR FOR IDENTITY VALUE SEVEN WHICH IS CURRENTLY UNDEFINED. THIS INDICATOR IS ALWAYS SET TO ZERO.
1747	001	FILTER NUMBER ----- NO STATEMENT FILTER NUMBER ALL FILTERS	0 1 THROUGH 14 15	A NUMBER ASSIGNED BY A UNIT TO IDENTIFY A SPECIFIC FILTER. UNIQUE FILTER NUMBERS ASSIGNED BY A UNIT.
1748	001	GEOGRAPHIC AREA FILTERED ----- NO STATEMENT INHIBIT TRACKS NORTHEAST OF LINE INHIBIT TRACKS NORTHWEST OF LINE INHIBIT TRACKS SOUTHEAST OF LINE INHIBIT TRACKS SOUTHWEST OF LINE INHIBIT TRACKS WITHIN DESCRIBED RECTANGLE INHIBIT TRACKS OUTSIDE OF DESCRIBED RECTANGLE INHIBIT TRACKS WITHIN DESCRIBED NESTED RECTANGLE INHIBIT TRACKS OUTSIDE OF DESCRIBED NESTED RECTANGLE INHIBIT TRACKS WITHIN DESCRIBED CIRCLE	0 1 2 3 4 5 6 7 8 9	A VALUE THAT DELINEATES AN AREA WHICH IS USED TO DESCRIBE THE LIMITS OF A FILTER'S USE.

5.2-208

MIL-STD-6016B

			FIELD CODING FOR J7.6I	(SHEET 5)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1748	001	GEOGRAPHIC AREA FILTERED	(CONTINUED)	

		INHIBIT TRACKS OUTSIDE	10	
		OF DESCRIBED CIRCLE		
		INHIBIT TRACKS WITHIN	11	
		DESCRIBED ANNULUS		
		INHIBIT TRACKS OUTSIDE	12	
		OF DESCRIBED ANNULUS		
		INHIBIT TRACKS WITHIN	13	
		DESCRIBED CIRCULAR		
		SECTOR		
		INHIBIT TRACKS OUTSIDE	14	
		OF DESCRIBED CIRCULAR		
		SECTOR		
		INHIBIT TRACKS WITHIN	15	
		DESCRIBED SECTOR OF		
		AN ANNULUS		
		INHIBIT TRACKS OUTSIDE	16	
		OF DESCRIBED SECTOR OF		
		AN ANNULUS		
		UNDEFINED	17 THROUGH 31	

WORD NUMBER: J7.6E0

WORD TITLE: FILTER MANAGEMENT EXTENSION WORD

:	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05:	04	03	02:	01	00:	
:	LATITUDE, 0.0103 MINUTE																				:	SPARE		:	WORD	:
:																					:			:	FORMAT	:
:																					:			:		:
:	20																				:	3		:	2	:

[illegible][illegible]

WORD DESCRIPTION

WORD NUMBER: J7.6E0

WORD TITLE: FILTER MANAGEMENT EXTENSION WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	10
756 003	SPARE	2-	4 3	
281 017	LATITUDE, 0.0103 MINUTE	5-	24 20	
756 003	SPARE	25-	27 3	
282 013	LONGITUDE, 0.0103 MINUTE	28-	48 21	
365 035	ALTITUDE, 100 FT 1	49-	58 10	
365 036	ALTITUDE, 100 FT 2	59-	68 10	
756 001	SPARE (SP)	69	1	

FIELD CODING FOR J7.6E0

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
281	017	LATITUDE, 0.0103 MINUTE -----		THE PRECISION IS APPROXIMATELY 63 FEET. IN 90/524,287 DEGREE INCREMENTS.
		0 DEGREES	0	
		+90/524,287 THROUGH +90 DEGREES NORTH	1 THROUGH 524287	
		NO STATEMENT	524288	
		-90 THROUGH -90/524,287 DEGREES SOUTH	524289 THROUGH 1048575	
282	013	LONGITUDE, 0.0103 MINUTE -----		THE PRECISION IS APPROXIMATELY 63 FEET. IN 180/1,048,575 DEGREE INCREMENTS.
		0 DEGREES	0	
		+180/1,048,575 THROUGH +180 DEGREES EAST	1 THROUGH 1048575	
		NO STATEMENT	1048576	
		-180 THROUGH -180/1,048,575 DEGREES WEST	1048577 THROUGH 2097151	
365	035	ALTITUDE, 100 FT 1 -----		EXPRESSES ALTITUDE AS MEASURED OUT- WARD FROM THE EARTH AS A POSITIVE QUANTITY ABOVE MEAN SEA LEVEL (MSL) IN FEET. THE BASE/MINIMUM ALTITUDE BOUNDARY OR A DESIGNATED ALTITUDE IN 100 FT. INCREMENTS. ALTITUDE IS NOT BEING REPORTED IN THIS MESSAGE.
		0 THROUGH 102,200 FEET	0 THROUGH 1022	
		NO STATEMENT	1023	
365	036	ALTITUDE, 100 FT 2 -----		EXPRESSES ALTITUDE AS MEASURED OUT- WARD FROM THE EARTH AS A POSITIVE QUANTITY ABOVE MEAN SEA LEVEL (MSL) IN FEET. ILLEGAL. AN UPPER/MAXIMUM ALTITUDE BOUNDARY IN 100 FT. INCREMENTS. AN UPPER/MAXIMUM ALTITUDE IS NOT BEING REPORTED IN THIS MESSAGE.
		0 ALTITUDE	0	
		100 THROUGH 102,200 FEET	1 THROUGH 1022	
		NO STATEMENT	1023	

5.2-212

MIL-STD-6016B

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: FILTER MANAGEMENT CONTINUATION WORD 1

:	24	23	22	21	20	19	18	17	16:	15	14	13	12	11	10	09	08	07:	06	05	04	03	02:	01	00:				
:	BEARING, 2									:	BEARING, 1									:	CONTINUATION WORD LABEL					:	WORD FORMAT		:
:	9									:	9									:	5					:	2		:

:	49	48:	47:	46	45	44	43	42	41:	40	39	38	37	36	35:	34	33	32	31	30	29	28	27:	26	25:		
:	S/C SW2:	SP :	AREA MINOR AXIS, 1						:	AREA MAJOR AXIS, 1						:	AXIS ORIENTATION, 1						:	S/C SW1:			
:	:	:							:							:							:	:			
:	2	:	1	:	6						:	6						:	8						:	2	:

:	69	68	67	66	65	64:	63	62	61	60	59	58:	57	56	55	54	53	52	51	50:	
:	AREA MINOR AXIS, 2						:	AREA MAJOR AXIS, 2						:	AXIS ORIENTATION, 2						:
:							:							:							:
:	6						:	6						:	8						:

WORD DESCRIPTION

WORD NUMBER: J7.6C1

WORD TITLE: FILTER MANAGEMENT CONTINUATION WORD 1

REFERENCE		BIT #	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0- 1 2	01
1551 001	CONTINUATION WORD LABEL	2- 6 5	00001
372 019	BEARING, 1	7- 15 9	
372 020	BEARING, 2	16- 24 9	
351 006	SQUARE/CIRCLE SWITCH, 1 (S/C SW1)	25- 26 2	
1806 002	AXIS ORIENTATION, 1	27- 34 8	
419 005	AREA MAJOR AXIS, 1	35- 40 6	
419 007	AREA MINOR AXIS, 1	41- 46 6	
756 001	SPARE (SP)	47 1	
351 012	SQUARE/CIRCLE SWITCH, 2 (S/C SW2)	48- 49 2	SAME CODING AS FOR BITS 25-26.
1806 003	AXIS ORIENTATION, 2	50- 57 8	SAME CODING AS FOR BITS 27-34.
419 006	AREA MAJOR AXIS, 2	58- 63 6	SAME CODING AS FOR BITS 35-40.
419 008	AREA MINOR AXIS, 2	64- 69 6	SAME CODING AS FOR BITS 41-46.

FIELD CODING FOR J7.6C1

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
372	019	BEARING, 1 -----		BEARING IS REFERENCED TO TRUE NORTH. THIS FIELD LOCATES THE BEGINNING BEARING OF A GEOGRAPHIC AREA BEING FILTERED. IN 1 DEGREE INCREMENTS.
		0 THROUGH 359 DEGREES ILLEGAL NO STATEMENT	0 THROUGH 359 360 THROUGH 510 511	
372	020	BEARING, 2 -----		BEARING IS REFERENCED TO TRUE NORTH. THIS FIELD LOCATES THE END BEARING OF A GEOGRAPHIC AREA BEING FILTERED. IN 1 DEGREE INCREMENTS.
		0 THROUGH 359 DEGREES ILLEGAL NO STATEMENT	0 THROUGH 359 360 THROUGH 510 511	
351	006	SQUARE/CIRCLE SWITCH, 1 -----		USED IN CONJUNCTION WITH THE LATITUDE; LONGITUDE; AREA MAJOR AXIS, 1; AREA MINOR AXIS, 1; AND AXIS ORIENTATION, 1 FIELDS TO DESCRIBE AN AREA.
		NO STATEMENT	0	
		SQUARE/RECTANGULAR	1	IF AREA MAJOR AND AREA MINOR AXES ARE EQUAL THE AREA DESCRIBED IS A SQUARE. IF THE AXES ARE NOT EQUAL THE AREA DESCRIBED IS A RECTANGLE.
		CIRCULAR/ELLIPTICAL	2	IF AREA MAJOR AND AREA MINOR AXES ARE EQUAL THE AREA DESCRIBED IS A CIRCLE. IF THE AXES ARE NOT EQUAL THE AREA IS AN ELLIPSE.
		UNDEFINED	3	
1806	002	AXIS ORIENTATION, 1 -----		THE AXIS ORIENTATION IS THE OFFSET FROM TRUE NORTH EXPRESSED IN ONE DEGREE INCREMENTS FROM ZERO TO 179 AND IS USED TO ORIENT THE AREA MA- JOR AXIS OF A CIRCLE, ELLIPSE, SQUARE, OR RECTANGLE. IN ONE DEGREE INCREMENTS.
		0 THROUGH 179 DEGREES ILLEGAL NO STATEMENT	0 THROUGH 179 180 THROUGH 254 255	
419	005	AREA MAJOR AXIS, 1 -----		THIS FIELD IS USED IN CONJUNCTION WITH THE SQUARE/CIRCLE SWITCH, 1; AREA MINOR AXIS, 1; AXIS

FIELD CODING FOR J7.6C1 (SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
419	005	AREA MAJOR AXIS, 1 -----	(CONTINUED)	
		0 THROUGH 244 DATA MILES	0 THROUGH 61	ORIENTATION, 1; LATITUDE; AND
		248 DATA MILES OR MORE	62	LONGITUDE TO DESCRIBE THE AREA OF
		NO STATEMENT	63	A CIRCLE, ELLIPSE, SQUARE, OR
				RECTANGLE. THE LENGTH EXPRESSED
				IN THIS FIELD IS DOUBLED AND
				CENTERED ON THE POSITION DESCRIBED
				BY THE LATITUDE AND LONGITUDE.
				IN FOUR DATA MILE INCREMENTS.
419	007	AREA MINOR AXIS, 1 -----		
		0 THROUGH 244 DATA MILES	0 THROUGH 61	THIS FIELD IS USED IN CONJUNCTION
		248 DATA MILES OR MORE	62	WITH THE SQUARE/CIRCLE SWITCH, 1;
		NO STATEMENT	63	AREA MAJOR AXIS, 1; AXIS
				ORIENTATION, 1; LATITUDE; AND
				LONGITUDE TO DESCRIBE THE AREA OF
				A CIRCLE, ELLIPSE, SQUARE, OR
				RECTANGLE. THE AREA MINOR AXIS, 1
				IS ALWAYS ORIENTED AT 90 DEGREES
				TO THE AREA MAJOR AXIS, 1. THE
				LENGTH EXPRESSED IN THIS FIELD IS
				DOUBLED AND CENTERED ON THE
				POSITION DESCRIBED BY THE LATITUDE
				AND LONGITUDE.
				IN FOUR DATA MILE INCREMENTS.

WORD MAP

WORD NUMBER: J7.6C2

WORD TITLE: FILTER MANAGEMENT CONTINUATION WORD 2

24	23	22	21:	20	19	18	17	16	15	14	13	12	11	10	09	08	07:	06	05	04	03	02:	01	00:
<---			:	DELTA LATITUDE, 0.0313 MINUTE 1													:	CONTINUATION WORD			:	WORD	:	
			:														:	LABEL			:	FORMAT	:	
			:	14													:	5			:	2	:	
49	48	47	46	45	44	43	42	41	40	39	38:	37	36:	35:	34	33	32	31	30	29	28	27	26	25
DELTA LATITUDE, 0.0313 MINUTE 2												:	SP	:	END:	DELTA LONGITUDE, 0.0313 MINUTE 1								
												:		:	PT1:									
14												:	2	:	1	:	14							
			:	69	68	67:	66:	65	64	63	62	61	60	59	58	57	56	55	54	53	52:	51	50	
			:																:	END:		:		
			:	SPARE		:	PT2:	DELTA LONGITUDE, 0.0313 MINUTE 2												:	---		>	
			:																:			:		
			:	3		:	1	:	14												:			:

WORD DESCRIPTION

WORD NUMBER: J7.6C2

WORD TITLE: FILTER MANAGEMENT CONTINUATION WORD 2

REFERENCE	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	00010
289 003	DELTA LATITUDE, 0.0313 MINUTE	7-	20 14	
	1			
290 003	DELTA LONGITUDE, 0.0313 MINUTE	21-	34 14	SAME CODING AS FOR BITS 7-20.
	1			
1645 002	END POINT, 1 (END PT1)	35	1	
756 002	SPARE (SP)	36-	37 2	
289 004	DELTA LATITUDE, 0.0313 MINUTE	38-	51 14	SAME CODING AS FOR BITS 7-20.
	2			
290 004	DELTA LONGITUDE, 0.0313 MINUTE	52-	65 14	SAME CODING AS FOR BITS 7-20.
	2			
1645 003	END POINT, 2 (END PT2)	66	1	
756 003	SPARE	67-	69 3	

FIELD CODING FOR J7.6C2

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
289	003	DELTA LATITUDE, 0.0313 MINUTE 1 -----		SPECIFIES THE POSITION OF A POINT AS AN OFFSET IN UNITS OF MINUTES OF ARC FROM A DESIGNATED REFERENCE POINT. IN 0.0313 MINUTE INCREMENTS WITH TWOS COMPLEMENT CODING.
		0 DIFFERENCE	0	
		+0.0313 THROUGH	1 THROUGH 8191	
		+256.3783 MINUTES		
		NO STATEMENT	8192	
		-256.3783 THROUGH	8193 THROUGH 16383	
		-0.0313 MINUTES		
1645	002	END POINT, 1 -----		THIS FIELD IS USED TO INDICATE THAT THE ASSOCIATED POSITION DESCRIBED IN THE MESSAGE IS AN END POINT OF A SEGMENTED LINE OR IS THE LAST POINT TRANSMITTED TO FORM A MULTI-SIDED AREA.
		NO STATEMENT	0	
		END POINT	1	THE ASSOCIATED LATITUDE/LONGITUDE OR DELTA LATITUDE/DELTA LONGITUDE FIELDS DESCRIBE A POINT THAT IS THE END POINT OF A SEGMENTED LINE OR IS COINCIDENT WITH THE INITIAL POINT TRANSMITTED IN A PREVIOUS MESSAGE TO FORM A MULTI-SIDED AREA THAT IS NOT A SQUARE OR A RECTANGLE. SQUARES AND RECTANGLES ARE DESCRIBED USING THE SQUARE/ CIRCLE SWITCH, AREA MAJOR AXIS, AREA MINOR AXIS AND AXIS ORIENTATION FIELDS.
1645	003	END POINT, 2 -----		THIS FIELD IS USED TO INDICATE THAT THE ASSOCIATED POSITION DESCRIBED IN THE MESSAGE IS AN END POINT OF A SEGMENTED LINE OR IS THE LAST POINT TRANSMITTED TO FORM A MULTI-SIDED AREA.
		NO STATEMENT	0	
		END POINT	1	THE ASSOCIATED LATITUDE/LONGITUDE OR DELTA LATITUDE/DELTA LONGITUDE FIELDS DESCRIBE A POINT THAT IS THE END POINT OF A SEGMENTED LINE

FIELD CODING FOR J7.6C2

(SHEET 2)

DFI	DUI	DUI/DI NAME
1645	003	END POINT, 2 -----

DI BIT CODE
(CONTINUED)

DUI/DI EXPLANATION

OR IS COINCIDENT WITH THE INITIAL
POINT TRANSMITTED IN A PREVIOUS
MESSAGE TO FORM A MULTI-SIDED AREA
THAT IS NOT A SQUARE OR A
RECTANGLE. SQUARES AND RECTANGLES
ARE DESCRIBED USING THE SQUARE/
CIRCLE SWITCH, AREA MAJOR AXIS,
AREA MINOR AXIS AND AXIS
ORIENTATION FIELDS.

.....

WORD TITLE: FILTER MANAGEMENT CONTINUATION WORD 3

49	48	47	46:	45	44	43	42	41	40	39	38	37	36	35:	34	33	32	31	30	29	28	27	26:	25					
<---			:	SPEED											:	COURSE											:	--->	
			:	11											:	9											:		

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50
:																				
:																				
:											SPARE									
:																				
:											24									

WORD DESCRIPTION

WORD NUMBER: J7.6C3

WORD TITLE: FILTER MANAGEMENT CONTINUATION WORD 3

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	00011
769 007	TRACK NUMBER, RELATED	7-	25 19	
371 015	COURSE	26-	34 9	
367 018	SPEED	35-	45 11	
756 024	SPARE	46-	69 24	

FIELD CODING FOR J7.6C3

(SHEET 1)

DFI DUI DUI/DI NAME
769 007 TRACK NUMBER, RELATED

DI BIT CODE

DUI/DI EXPLANATION

THE TN OF A JU OR POINT THAT IS
RELATED TO THE REFERENCE TN IN
THE MESSAGE.
THE NINETEEN BITS OF THIS TN ARE
DIVIDED INTO FIVE GROUPS
CONSISTING OF TWO FIVE-BIT GROUPS
AND THREE THREE-BIT GROUPS. EACH
FIVE-BIT GROUP REPRESENTS AN
ALPHANUMERIC CHARACTER OF EITHER
AN ALPHA CHARACTER OF A THROUGH Z
(EXCLUDING THE ALPHA CHARACTERS I
AND O) OR A NUMERIC CHARACTER OF
ZERO THROUGH SEVEN. EACH THREE-
BIT GROUP REPRESENTS A NUMERIC
CHARACTER OF ZERO THROUGH SEVEN.
THEREFORE, ANY TN CAN BE
REPRESENTED BY AANNN WHERE A IS AN
ALPHANUMERIC CHARACTER CODED WITH
FIVE BITS AND N IS A NUMERIC
CHARACTER CODED WITH THREE BITS.
CODING FOR A FIVE BIT ALPHANUMERIC
CHARACTER IS SHOWN BELOW. CODING
FOR A THREE BIT NUMERIC CHARACTER
IS EXACTLY THE SAME AS ZERO
THROUGH SEVEN OF THE FIVE BIT
ALPHANUMERIC CHARACTER WITH THE
FIRST TWO LEADING ZEROES DELETED.

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6
00111	7
01000	A
01001	B
01010	C
01011	D
01100	E
01101	F
01110	G
01111	H

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	007	TRACK NUMBER, RELATED -----	(CONTINUED)	
				10000 J
				10001 K
				10010 L
				10011 M
				10100 N
				10101 P
				10110 Q
				10111 R
				11000 S
				11001 T
				11010 U
				11011 V
				11100 W
				11101 X
				11110 Y
				11111 Z
		00000	0	NO STATEMENT.
		00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU). ILLEGAL.
		00077	63	
		00100-00175	64 THROUGH 125	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU). RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		00176	126	COLLECTIVE ADDRESS.
		00177	127	
		00200-07776	128 THROUGH 4094	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		07777	4095	ILLEGAL.
		0A000-0Z777	4096 THROUGH 16383	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		10000-17777	16384 THROUGH 20479	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND

FIELD CODING FOR J7.6C3

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	007	TRACK NUMBER, RELATED -----	(CONTINUED)	
		20000-27777	32768 THROUGH 36863	REFERENCE POINTS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE

FIELD CODING FOR J7.6C3

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	007	TRACK NUMBER, RELATED -----	(CONTINUED)	
		70000-77776	114688 THROUGH 118782	USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
371	015	COURSE -----		INDICATES THE DIRECTION OF TRAVEL OF AN OBJECT IN DEGREES WITH RESPECT TO TRUE NORTH. IN 1 DEGREE INCREMENTS.
		0 THROUGH 359 DEGREES ILLEGAL NO STATEMENT	0 THROUGH 359 360 THROUGH 510 511	
367	018	SPEED -----		THE RATE OF CHANGE OF POSITION.
		0 THROUGH 4092 DATA MILES PER HOUR NO STATEMENT	0 THROUGH 2046 2047	EXPRESSES GROUND SPEED IN 2 DATA MILES PER HOUR INCREMENTS.

5.2-227

MIL-STD-6016B

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

J7.7 MESSAGE SUMMARY

PURPOSE

The J7.7 Association Message is used to transmit information, on two or more TNs, that has been automatically or manually associated when the information is deemed to pertain to the same contact. When a determination is made that the above relationship no longer exists, there is a provision for terminating this information association.

DATA ELEMENT SUMMARY

<u>J7.7I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
SPARE	1
ACTION, ASSOCIATION	3
SPARE	2
TRACK NUMBER, SUBJECT	19
SPARE	13
TRACK NUMBER, ASSOCIATED	19

MIL-STD-6016B

J7.7 TRANSMIT/RECEIVE RULES

TITLE: Association Message

TRANSMIT RULES

The J7.7 Association message with the Action, Association field set to Associate Data shall be transmitted periodically at a RRN = 3 (96 seconds, 80-120 second interval). The J7.7 message with the Action, Association field set to Terminate Association shall be transmitted one time.

RECEIVE RULES

There are no receive rules specified for this message.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: ASSOCIATION INITIAL WORD

24	23	22	21	20	19:	18	17:	16	15	14:	13:	12	11	10:	09	08	07:	06	05	04	03	02:	01	00:				
<---					:	SP	:	ACTION, ASSOCIATION:		:	SP	:	MESSAGE LENGTH		:	SUBLABEL, J-SERIES		:	LABEL, J-SERIES				:	WORD FORMAT		:		
					:		:	2		:	3		:	1		:	3		:	3		:	5		:	2		:

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
SPARE												:	TRACK NUMBER, SUBJECT											
13												:	19											

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51:	50
:																				:
:	TRACK NUMBER, ASSOCIATED																			:--->
:																				:
:	19																			:

WORD DESCRIPTION

WORD NUMBER: J7.7I

WORD TITLE: ASSOCIATION INITIAL WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT #		RESOLUTION, CODING, ETC
			POSITION	BITS	
1550	001	WORD FORMAT	0-	1 2	00
270	004	LABEL, J-SERIES	2-	6 5	00111
271	005	SUBLABEL, J-SERIES	7-	9 3	111
800	001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
756	001	SPARE (SP)	13	1	
1606	008	ACTION, ASSOCIATION	14-	16 3	
756	002	SPARE (SP)	17-	18 2	
769	028	TRACK NUMBER, SUBJECT	19-	37 19	
756	013	SPARE	38-	50 13	
769	008	TRACK NUMBER, ASSOCIATED	51-	69 19	

			FIELD CODING FOR J7.7I	(SHEET 1)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1606	008	ACTION, ASSOCIATION -----		USED TO ASSOCIATE THE DATA FROM TWO DIFFERENT TRACK NUMBERS WHEN THE TWO TRACK NUMBERS ARE BELIEVED TO BE THE SAME CONTACT.
		ASSOCIATE DATA	0	THE INFORMATION PERTAINING TO THE TRACKS SPECIFIED BY THE SUBJECT TN AND THE ASSOCIATED TN IS DEEMED TO BE ASSOCIATED WITH THE SAME CONTACT.
		TERMINATE ASSOCIATION	1	THE TN SPECIFIED IN THE SUBJECT TN IS NO LONGER ASSOCIATED WITH THE TRACK/POINT SPECIFIED IN THE ASSOCIATED TN.
		UNDEFINED	2 THROUGH 7	
769	028	TRACK NUMBER, SUBJECT -----		THE TN OF A TRACK OR POINT THAT IS BEING ASSOCIATED WITH THE ASSOCIATED TN. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE-BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANNN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.
			CODING CHARACTER	
			00000	0

FIELD CODING FOR J7.7I				(SHEET 2)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	028	TRACK NUMBER, SUBJECT -----	(CONTINUED)	
				00001 1
				00010 2
				00011 3
				00100 4
				00101 5
				00110 6
				00111 7
				01000 A
				01001 B
				01010 C
				01011 D
				01100 E
				01101 F
				01110 G
				01111 H
				10000 J
				10001 K
				10010 L
				10011 M
				10100 N
				10101 P
				10110 Q
				10111 R
				11000 S
				11001 T
				11010 U
				11011 V
				11100 W
				11101 X
				11110 Y
				11111 Z
		00000	0	NO STATEMENT.
		00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		00077	63	ILLEGAL.
		00100-00175	64 THROUGH 125	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		00176	126	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		00177	127	COLLECTIVE ADDRESS.
		00200-07776	128 THROUGH 4094	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2IUS TO BE USED FOR TACTICAL

			FIELD CODING FOR J7.7I	(SHEET 3)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	028	TRACK NUMBER, SUBJECT -----	(CONTINUED)	
		07777 0A000-0Z777	4095 4096 THROUGH 16383	INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS. ILLEGAL.
		10000-17777	16384 THROUGH 20479	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		20000-27777	32768 THROUGH 36863	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.

			FIELD CODING FOR J7.7I	(SHEET 4)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	028	TRACK NUMBER, SUBJECT -----	(CONTINUED)	
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		70000-77776	114688 THROUGH 118782	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
769	008	TRACK NUMBER, ASSOCIATED -----		THE TN OF AN ENTITY THAT IS ASSOCIATED WITH THE SUBJECT TN OF THE MESSAGE. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE-

FIELD CODING FOR J7.7I				(SHEET 5)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	008	TRACK NUMBER, ASSOCIATED -----	(CONTINUED)	

BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6
00111	7
01000	A
01001	B
01010	C
01011	D
01100	E
01101	F
01110	G
01111	H
10000	J
10001	K
10010	L
10011	M
10100	N
10101	P
10110	Q
10111	R
11000	S
11001	T
11010	U

			FIELD CODING FOR J7.7I	(SHEET 6)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	008	TRACK NUMBER, ASSOCIATED -----	(CONTINUED)	
				11011 V
				11100 W
				11101 X
				11110 Y
				11111 Z
		00000	0	NO STATEMENT.
		00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		00077	63	ILLEGAL.
		00100-00175	64 THROUGH 125	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		00176	126	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		00177	127	COLLECTIVE ADDRESS.
		00200-07776	128 THROUGH 4094	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		07777	4095	ILLEGAL.
		0A000-0Z777	4096 THROUGH 16383	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		10000-17777	16384 THROUGH 20479	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		20000-27777	32768 THROUGH 36863	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS

			FIELD CODING FOR J7.7I	(SHEET 7)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	008	TRACK NUMBER, ASSOCIATED -----	(CONTINUED)	
				FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		70000-77776	114688 THROUGH 118782	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE

FIELD CODING FOR J7.7I				(SHEET 8)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	008	TRACK NUMBER, ASSOCIATED -----	(CONTINUED)	USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

TABLE J8-1. J8 Information Management Word Applicability Table

INITIAL WORD	SUBLABEL							
	J8.0I UNIT DESIGNATOR	J8.1I MISSION CORRELATOR CHANGE						
EXTENSION WORD - 0	J8.0E0							
CONTINUATION WORD - 0								
...								
...								
...								
...								
...								
...								
...								
...								
31								

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

J8.0 MESSAGE SUMMARY

PURPOSE

The J8.0 Unit Designator message is used to transmit to a terminal (from its NCS) the unit designator associated with the TNs in the terminal's Participation Group assignments. The message will also be used to inform an NCS of a terminal's unit designator.

DATA ELEMENT SUMMARY

<u>J8.0I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
TRACK NUMBER, ADDRESSEE	15
ASSIGN/DEASSIGN UNIT DESIGNATOR	2
SPARE	31
RECEIPT/COMPLIANCE	5
RECURRENCE RATE, RECEIPT/ COMPLIANCE	4

<u>J8.0E0</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
UNIT DESIGNATOR	48
SPARE	1
TRACK NUMBER, REFERENCE	19

MIL-STD-6016B

J8.0 TRANSMIT/RECEIVE RULES

TITLE: Unit Designator Message

TRANSMIT RULES

The J8.0 Unit Designator message shall be transmitted by JUs as follows:

- a. When initially entering a net after receiving the J0.3 Time Slot Assignment message and J1.5 Net Control Initialization message.
- b. When data changes.

RECEIVE RULES

There are no receive rules specified for this message.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: UNIT DESIGNATOR INITIAL WORD

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25			
																			SPARE		:	A/D UD		:			----
																			31		:	2		:			

:	69	68	67	66:	65	64	63	62	61:	60	59	58	57	56	55	54	53	52	51	50
:	RECURRENCE				:					:										
:	RATE, RECEIPT/				:	RECEIPT/COMPLIANCE				:	---									
:	COMPLIANCE				:					:										
:	4				:	5				:										

WORD DESCRIPTION

WORD NUMBER: J8.0I

WORD TITLE: UNIT DESIGNATOR INITIAL WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	00
270 004	LABEL, J-SERIES	2-	6 5	01000
271 005	SUBLABEL, J-SERIES	7-	9 3	000
800 001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
769 006	TRACK NUMBER, ADDRESSEE	13-	27 15	
1792 001	ASSIGN/DEASSIGN UNIT DESIGNATOR (A/D UD)	28-	29 2	
756 031	SPARE	30-	60 31	
392 008	RECEIPT/COMPLIANCE	61-	65 5	
444 025	RECURRENCE RATE, RECEIPT/ COMPLIANCE (RRN R/C)	66-	69 4	

FIELD CODING FOR J8.0I

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	006	TRACK NUMBER, ADDRESSEE -----		THE TN OF A UNIT (I.E., JU OR PU) TO WHICH A MESSAGE IS ADDRESSED.
		NO STATEMENT NUMERIC	0 00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		ILLEGAL NUMERIC	00077 (OCTAL) 00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC	00177 (OCTAL)	COLLECTIVE ADDRESS.
		NUMERIC	00200 THROUGH 07776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL NUMERIC	07777 (OCTAL) 10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
1792	001	ASSIGN/DEASSIGN UNIT DESIGNATOR -----		INDICATES WHETHER THE UNIT DESIGNATOR IN THE MESSAGE SHOULD BE ASSIGNED OR DEASSIGNED TO THE REFERENCE TN IN THE MESSAGE.
		NO STATEMENT ASSIGN	0 1	THE UNIT DESIGNATOR IN THE MESSAGE SHOULD BE ASSIGNED TO THE REFERENCE TN IN THE MESSAGE.
		DEASSIGN	2	THE UNIT DESIGNATOR IN THE MESSAGE SHOULD BE DEASSIGNED TO THE REFERENCE TN IN THE MESSAGE.
		UNDEFINED	3	
392	008	RECEIPT/COMPLIANCE -----		
		ORIGINAL ORDER	0	RECEIPT/COMPLIANCE RESPONSE REQUIRED.
		ORIGINAL ORDER	1	RECEIPT/COMPLIANCE RESPONSE NOT REQUIRED. MUST BE USED IN CONJUNCTION WITH ORIGINAL ORDER

5.2-250

MIL-STD-6016B

			FIELD CODING FOR J8.0I		(SHEET 2)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION	
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)		
		MACHINE RECEIPT	2	MESSAGES ADDRESSED TO COLLECTIVE ADDRESSES. THE ORIGINAL ORDER SHALL BE TRANSMITTED 3 TIMES.	
		WILCO (WILL COMPLY)	3	MESSAGE RECEIVED ERROR FREE. THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER WILL COMPLY. IN THIS USAGE, THE SYSTEM COMPONENT IS A HUMAN OPERATOR OR (UNMANNED VEHICLE ONLY) A MACHINE.	
		HAVCO (HAVE COMPLIED)	4	THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER HAS COMPLIED. IN THIS USAGE, THE SYSTEM COMPONENT MAY BE A HUMAN OPERATOR OR A MACHINE.	
		ORIGINAL ORDER	5	RECEIPT/COMPLIANCE RESPONSE (MR AND/OR CANTPRO ONLY) REQUIRED.	
		CANTCO (CANNOT COMPLY)	6	THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER CANNOT COMPLY. IN THIS USAGE, THE SYSTEM COMPONENT IS A HUMAN OPERATOR OR (UNMANNED VEHICLE ONLY) A MACHINE.	
		CANTPRO (CANNOT PROCESS)	7	NON-SPECIFIC SYSTEM LIMITATION OR CONFLICT. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.	
		CANTPRO (CANNOT PROCESS)	8	TIME SLOT ASSIGNMENT CONFLICT DETECTED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.	
		CANTPRO (CANNOT PROCESS)	9	CRYPTOVARIABLE NOT HELD. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.	
		CANTPRO (CANNOT PROCESS)	10	PARTICIPATION GROUP NOT DEFINED.	

			FIELD CODING FOR J8.0I	(SHEET 3)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
		CANTPRO (CANNOT PROCESS)	11	THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	12	APPLICABLE ASSIGNMENT TABLE FULL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	13	RELAY FUNCTION SPECIFIED ALREADY HAS ASSIGNED TIME SLOT BLOCKS FOR WHICH A DIFFERENT RELAY MODE/NET NUMBER HAS BEEN SPECIFIED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	14	INTERFERENCE PROTECTION FEATURES WOULD BE VIOLATED BY ACCEPTANCE OF ASSIGNMENT. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	15	HOST SUBSCRIBER INTERFACE IS INACTIVE AND MESSAGE IS NOT PROCESSED BY THE TERMINAL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
				TN, ADDRESSEE DOES NOT IMPLEMENT THE ACTION REQUESTED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN

5.2-253

FIELD CODING FOR J8.0I				(SHEET 4)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
		CANTPRO (CANNOT PROCESS)	16	RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED. ONE OR MORE TNS IN THE OM NOT HELD. THIS IS AN AUTOMATIC COMPUTER- GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	17	TN, REFERENCE OR TN, FRIENDLY WEAPON IS UNDER OWN UNIT CONTROL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	18	UNIT NOT EXERCISING AIR CONTROL CAPABILITY. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	19	UNACCEPTABLE IDENTITY. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	20	ADDRESSEE TN IS INACTIVE. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	21	THE FORWARDING UNIT DID NOT RECEIVE A MACHINE RECEIPT FROM THE ADDRESSEE TN. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.

MIL-STD-6016B

			FIELD CODING FOR J8.0I	(SHEET 5)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
		CANTPRO (CANNOT PROCESS)	22	TN, REFERENCE OR TN, FRIENDLY WEAPON IS NOT UNDER THIS UNIT'S CONTROL. THIS IS AN AUTOMATIC COMPUTER- GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		UNDEFINED NO STATEMENT	23 THROUGH 30 31	
444	025	RECURRENCE RATE, RECEIPT/ COMPLIANCE -----		IDENTIFIES THE TIME SLOT IN WHICH THE RECEIPT/COMPLIANCE FOR THE MESSAGE IS TO BE TRANSMITTED.
		NO STATEMENT	0	
		NUMERIC	1 THROUGH 15	THE NUMERIC VALUE FOR RECEIPT/ COMPLIANCE, SPECIFIED AS RECURRENCE RATE NUMBER, DEFINES THE NUMBER N OF CONSECUTIVE TIME SLOTS FROM THE ORIGINAL TRANSMISSION TO THE DONATED TIME SLOT: N=3X2 TO THE (15-RRN) POWER.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J8.0E0

WORD TITLE: UNIT DESIGNATOR EXTENSION WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00	:
																						: WORD :			
<---																						: FORMAT :			
																						:	:	:	
																						:	2	:	

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

UNIT DESIGNATOR

48																							
----	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	:	50	:
:																					:	:
:	TRACK NUMBER, REFERENCE																				:	SP
:																					:	:
:	19																				:	1

WORD DESCRIPTION

WORD NUMBER: J8.0E0

WORD TITLE: UNIT DESIGNATOR EXTENSION WORD

REFERENCE		BIT #		RESOLUTION, CODING, ETC
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	
1550 001	WORD FORMAT	0-	1 2	10
1793 001	UNIT DESIGNATOR	2-	49 48	
756 001	SPARE (SP)	50	1	
769 002	TRACK NUMBER, REFERENCE	51-	69 19	

FIELD CODING FOR J8.0E0 (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1793	001	UNIT DESIGNATOR ----- STANDARD ASCII CODE		
769	002	TRACK NUMBER, REFERENCE -----		A REFERENCE NUMBER USED TO ASSOCIATE INFORMATION AND DIRECTIVES WITH THE TRACK. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE-BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANNN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6
00111	7
01000	A
01001	B
01010	C
01011	D

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
				01100 E
				01101 F
				01110 G
				01111 H
				10000 J
				10001 K
				10010 L
				10011 M
				10100 N
				10101 P
				10110 Q
				10111 R
				11000 S
				11001 T
				11010 U
				11011 V
				11100 W
				11101 X
				11110 Y
				11111 Z
		00000	0	NO STATEMENT.
		00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		00077	63	ILLEGAL.
		00100-00175	64 THROUGH 125	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		00176	126	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		00177	127	COLLECTIVE ADDRESS.
		00200-07776	128 THROUGH 4094	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		07777	4095	ILLEGAL.
		0A000-0Z777	4096 THROUGH 16383	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		10000-17777	16384 THROUGH 20479	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G.,

FIELD CODING FOR J8.0E0

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		1A000-1Z777	20480 THROUGH 32767	TRACKS AND REFERENCE POINTS. ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		20000-27777	32768 THROUGH 36863	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO

5.2-260

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		6A000-6Z777	102400 THROUGH 114687	C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS. ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		70000-77776	114688 THROUGH 118782	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

J8.1 MESSAGE SUMMARY

PURPOSE

The J8.1 Mission Correlator Change message is used to add, delete, or change the mission correlator on a specific aircraft or flight of aircraft.

DATA ELEMENT SUMMARY

<u>J8.1I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
TRACK NUMBER, ADDRESSEE	15
MISSION CORRELATOR CHANGE	2
MISSION CORRELATOR	8
MISSION CORRELATOR, NEW	8
DISUSED	2
DISUSED	8
DISUSED	8
SPARE	6

MIL-STD-6016B

J8.1 TRANSMIT/RECEIVE RULES

TITLE: Mission Correlator Change Message

TRANSMIT RULES

The J8.1 Mission Correlator Change message shall be transmitted once by a JU controlling the Addressee TN.

RECEIVE RULES

Upon receipt, IUs under control shall modify the appropriate Mission Correlator values transmitted in their J2 PPLI messages.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J8.1I
WORD TITLE: MISSION CORRELATOR CHANGE INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00
TRACK NUMBER, ADDRESSEE												:	MESSAGE	:	SUBLABEL,	:	WORD						:	
												:	LENGTH	:	J-SERIES	:	LABEL, J-SERIES						:	
												:	INDICATOR	:		:	FORMAT						:	
15												:	3	:	3	:	5						:	
												:		:		:	2						:	
49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
<---	:	DUD	:	MISSION CORRELATOR, NEW								:	MISSION CORRELATOR								:	COR CHG	:	---
	:		:									:									:		:	
	:	2	:	8								:	8								:	2	:	

WORD DESCRIPTION

WORD NUMBER: J8.1I

WORD TITLE: MISSION CORRELATOR CHANGE INITIAL WORD

REFERENCE	DATA FIELD DESCRIPTOR	BIT # POSITION BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0- 1 2	00
270 004	LABEL, J-SERIES	2- 6 5	01000
271 005	SUBLABEL, J-SERIES	7- 9 3	001
800 001	MESSAGE LENGTH INDICATOR	10- 12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
769 006	TRACK NUMBER, ADDRESSEE	13- 27 15	
1669 001	MISSION CORRELATOR CHANGE (COR CHG)	28- 29 2	APPLIES TO BITS 30-45.
725 003	MISSION CORRELATOR	30- 37 8	CONTROLLED BY BITS 28-29.
725 004	MISSION CORRELATOR, NEW	38- 45 8	CONTROLLED BY BITS 28-29, SAME CODING AS FOR BITS 30-37.
758 002	DISUSED (DUD)	46- 47 2	
758 008	DISUSED	48- 55 8	
758 008	DISUSED	56- 63 8	
756 006	SPARE	64- 69 6	

FIELD CODING FOR J8.1I

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	006	TRACK NUMBER, ADDRESSEE -----		THE TN OF A UNIT (I.E., JU OR PU) TO WHICH A MESSAGE IS ADDRESSED.
		NO STATEMENT NUMERIC	0 00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		ILLEGAL NUMERIC	00077 (OCTAL) 00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC	00177 (OCTAL)	COLLECTIVE ADDRESS.
		NUMERIC	00200 THROUGH 07776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL NUMERIC	07777 (OCTAL) 10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
1669	001	MISSION CORRELATOR CHANGE -----		SPECIFIES A CHANGE IN MISSION CORRELATOR.
		NO STATEMENT	0	
		ADD MISSION CORRELATOR	1	
		DELETE MISSION CORRELATOR	2	
		CHANGE MISSION CORRELATOR TO MISSION CORRELATOR, NEW	3	
725	003	MISSION CORRELATOR -----		SPECIFIES THE IDENTIFYING NUMBER ASSIGNED TO AN OVERALL MISSION. THIS ENABLES PARTICIPANTS WITH DIFFERENT OBJECTIVES ON SPECIFIC MISSIONS TO BE ASSOCIATED WITH THE SAME OVERALL MISSION.
		NO STATEMENT	0	
		NUMERIC	1 THROUGH 255	

TABLE J9-1. J9 Weapons Coordination and Management Word Applicability Table

INITIAL WORD	SUBLABEL							
	J9.0I COMMAND	J9.1I ENGAGEMENT COORDINATION						
EXTENSION WORD - 0	J9.0E0							
CONTINUATION WORD - 0								
1	J9.0C1 COMMAND WORD 1							
2	J9.0C2 COMMAND WORD 2							
...								
...								
...								
...								
...								
...								
31								

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

J9.0 MESSAGE SUMMARY

PURPOSE

The J9.0 Command Message provides the means to transmit threat warning conditions, alert states, and weapons condition orders, to direct weapon system engagement for air defense/air support, and to direct antisubmarine warfare (ASW) operations.

DATA ELEMENT SUMMARY

<u>J9.0I</u>		<u>J9.0C1 (Continued)</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	SPARE	14
LABEL, J-SERIES	5		
SUBLABEL, J-SERIES	3	<u>J9.0C2</u>	
MESSAGE LENGTH INDICATOR	3	DATA ELEMENT	# BITS
TRACK NUMBER, ADDRESSEE	15	WORD FORMAT	2
COMMAND	5	CONTINUATION WORD LABEL	5
THREAT WARNING CONDITION	2	HOURL	5
WEAPON TYPE	2	MINUTE	6
TRACK NUMBER, OBJECTIVE	19	SECOND	6
EXERCISE INDICATOR	1	NUMBER OF MISSILES	3
DISUSED	3	SPARE	43
SPARE	1		
RECEIPT/COMPLIANCE	5		
RECURRENCE RATE, RECEIPT/ COMPLIANCE	4		

<u>J9.0E0</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
DUTY ASSIGNMENT	6
COMMAND MISSION	5
NUMBER OF AIRCRAFT	6
DISUSED	16
DISUSED	5
DISUSED	2
THREAT WARNING ENVIRONMENT	3
DUTY ASSIGNMENT FUNCTIONAL AREA	4
SPARE	2
TRACK NUMBER, FRIENDLY WEAPON	19

<u>J9.0C1</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
CONTINUATION WORD LABEL	5
VOICE CALL SIGN	24
VOICE FREQUENCY/CHANNEL	13
CONTROL CHANNEL	7
SECURE RADIO INDICATOR	1
VOICE FREQUENCY/CHANNEL INDICATOR	1
METHOD OF FIRE	3

MIL-STD-6016B

J9.0 TRANSMIT/RECEIVE RULES

TITLE: Command Message

TRANSMIT RULES

The J9.0 Command message shall be transmitted by any C² JU responsible for transmitting threat warning conditions, alert states, and weapons condition orders and for directing weapon system engagement. Table J9-2 indicates the word grouping for each command contained in the J9.0 message. Transmission of the J9.0 message with the various R/C values set shall be in accordance with procedures specified in paragraph 4.1.7.

RECEIVE RULES

There are no receive rules specified for this message.

TABLE J9-2. Required Word Sequences and Receipt/Compliance Values for
Command Values (Sheet 1 of 4)

COMMAND VALUE	J9.0 WORD SEQUENCE REQUIRED				R/C VAL ¹	MSG PRI ²	COMMAND VALUE DESCRIPTOR
	I	EO	C1	C2			
0 - WEAPONS FREE ³	X				0/1	P	FIRE ONLY AT TARGETS NOT RECOGNIZED AS FRIENDLY IN ACCORDANCE WITH CURRENT RULES OF ENGAGEMENT.
1 - WEAPONS TIGHT ³	X				0/1	P	FIRE ONLY AT TARGETS POSITIVELY IDENTIFIED AS HOSTILE IN ACCORDANCE WITH CURRENT RULES OF ENGAGEMENT.
2 - ENGAGE	X	X ⁵			0	P	ENGAGE THE TARGET SPECIFIED IN OBJECTIVE TN TO DESTRUCTION WITH WEAPON SPECIFIED IN WEAPON TYPE AND WHOSE TRACK NUMBER IS INDICATED IN FRIENDLY WEAPON TN. IF WEAPON TYPE IS ANY/ALL, PERFORM THOSE FUNCTIONS SPECIFIED FOR WEAPON SELECTED. ⁴
3 - ASSIGN	X	X ⁵			0	P	PERFORM ALL FUNCTIONS OF ENGAGEMENT OF OBJECTIVE TN BUT DO NOT FIRE UNTIL ORDERED OR OBJECTIVE TN BECOMES ELIGIBLE FOR DESTRUCTION UNDER EXISTING DOCTRINE AND/OR RULES OF ENGAGEMENT. THE WEAPON SYSTEM TO BE USED IS SPECIFIED IN FRIENDLY WEAPON TN AND/OR WEAPON TYPE FIELD(S). IF WEAPON TYPE IS ANY/ALL, PERFORM THOSE FUNCTIONS SPECIFIED FOR THE WEAPON SELECTED. ⁴
4 - CEASE ENGAGE	X	X ⁵			0	P	BREAK THE ENGAGEMENT ON THE TARGET SPECIFIED IN OBJECTIVE TN WITH THE WEAPON SYSTEM SPECIFIED IN WEAPON TYPE AND WHOSE TRACK NUMBER IS INCLUDED IN FRIENDLY WEAPON TN. IF WEAPON TYPE IS MISSILE/CONVENTIONAL, DO NOT FIRE AT TARGET SPECIFIED IN OBJECTIVE TN. IF FIRING HAS OCCURRED, PERMIT MISSILES IN FLIGHT TO CONTINUE TO INTERCEPT. IF WEAPON TYPE IS ANY/ALL, AND FRIENDLY WEAPON TN=0, ALL WEAPONS EMPLOYED AGAINST OBJECTIVE TN ARE INDICATED. ⁴
5 - HOLD FIRE ³	X				0/1	P	EMERGENCY ORDER. IF WEAPON TYPE IS MISSILE/CONVENTIONAL, DO NOT FIRE AT TARGET SPECIFIED IN OBJECTIVE TN. IF FIRING HAS OCCURRED, DESTROY THE MISSILES IN FLIGHT. IF WEAPON TYPE IS AIRCRAFT, DISCONTINUE THE INTERCEPT. IF WEAPON TYPE IS ANY/ALL, TAKE ACTION SPECIFIED FOR WEAPON BEING EMPLOYED.

TABLE J9-2. Required Word Sequences and Receipt/Compliance Values for
Command Values (Sheet 2 of 4)

COMMAND VALUE	J9.0 WORD SEQUENCE REQUIRED				R/C VAL ¹	MSG PRI ²	COMMAND VALUE DESCRIPTOR
	I	E0	C1	C2			
6 - CEASE FIRE	X				0/1	P	IF WEAPON TYPE IS MISSILE/CONVENTIONAL, DO NOT FIRE AT TARGET SPECIFIED IN OBJECTIVE TN. IF FIRING HAS OCCURRED, PERMIT MISSILES IN FLIGHT TO CONTINUE TO INTERCEPT. IF WEAPON TYPE IS AIRCRAFT, DISCONTINUE THE INTERCEPT. IF WEAPON TYPE IS ANY/ALL, TAKE ACTION SPECIFIED FOR THE WEAPON BEING EMPLOYED.
7 - COVER	X				0	P	ADDRESSEE TN COVER OBJECTIVE TN. OBJECTIVE TN IS ENGAGED BY ANOTHER WEAPON SYSTEM OR HAS NOT YET BECOME A "SIGNIFICANT" THREAT. ADDRESSEE TN ASSUME POSTURE THAT WILL ALLOW ENGAGEMENT OF OBJECTIVE TN IF DIRECTED.
8 - SALVO/CLEAR AIRCRAFT ³	X	X ⁵			0/1	P	ADDRESSEE TN CLEAR FRIENDLY WEAPON TN FROM VICINITY OF OBJECTIVE TN. IF ADDRESSEE TN IS COLLECTIVE ADDRESS 00177, ALL UNITS CLEAR ALL FRIENDLY WEAPON PLATFORMS FROM VICINITY OF OBJECTIVE TN. ⁴
9 - ASSUME CONTROL	X	X ⁵			0	P	IF FRIENDLY WEAPON TN = 0, ADDRESSEE TN ASSUME CONTROL OF OBJECTIVE TN. IF FRIENDLY WEAPON TN ≠ 0, ADDRESSEE TN DIRECT FRIENDLY WEAPON TN TO ASSUME CONTROL OF OBJECTIVE TN. ⁴
10 - ATTACK	X				0	P	IF FRIENDLY WEAPON TN = 0, ADDRESSEE TN DIRECT ALL WEAPONS TO ATTACK. IF FRIENDLY WEAPON TN ≠ 0, ADDRESSEE IN DIRECT FRIENDLY WEAPON TN TO ATTACK.
11 - CEASE ATTACK	X				0	P	IF FRIENDLY WEAPON TN = 0, ADDRESSEE TN DIRECT ALL FRIENDLY WEAPONS TO CEASE ATTACK. IF FRIENDLY WEAPON TN ≠ 0, ADDRESSEE TN DIRECT FRIENDLY WEAPON TN TO CEASE ATTACK.
12-13 - DISUSED	—	—	—	—	—	—	
14 - PROCEED TO POINT	X	X ⁵			0	P	IF FRIENDLY WEAPON TN = 0, ADDRESSEE TN PROCEED TO POINT DESIGNATED BY OBJECTIVE TN. IF FRIENDLY WEAPON TN ≠ 0, ADDRESSEE TN DIRECT FRIENDLY WEAPON TN TO PROCEED TO POINT DESIGNATED BY OBJECTIVE TN. ⁴

5.2-274

MIL-STD-6016B

TABLE J9-2. Required Word Sequences and Receipt/Compliance Values for
Command Values (Sheet 3 of 4)

COMMAND VALUE	J9.0 WORD SEQUENCE REQUIRED				R/C VAL ¹	MSG PRI ²	COMMAND VALUE DESCRIPTOR
	I	E0	C1	C2			
15 - CEASE PROCEEDING TO POINT	X	X ⁵			0	P	IF FRIENDLY WEAPON TN = 0, ADDRESSEE TN CEASE PROCEEDING TO POINT DESIGNATED BY OBJECTIVE TN. IF FRIENDLY WEAPON TN ≠ 0, ADDRESSEE TN DIRECT FRIENDLY WEAPON TN TO CEASE PROCEEDING TO POINT DESIGNATED BY OBJECTIVE TN. ⁴
16 - CONDUCT PROCEDURES INDICATED ³	X	X			0/1	P	IF FRIENDLY WEAPON TN = 0, ADDRESSEE TN CONDUCT PROCEDURES INDICATED BY COMMAND MISSION. IF FRIENDLY WEAPON TN ≠ 0, ADDRESSEE TN DIRECT FRIENDLY WEAPON TN TO CONDUCT PROCEDURES INDICATED BY COMMAND MISSION.
17 - CEASE CONDUCTING PROCEDURES INDICATED ³	X	X			0/1	P	IF FRIENDLY WEAPON TN = 0, ADDRESSEE TN CEASE CONDUCTING PROCEDURES INDICATED BY COMMAND MISSION. IF FRIENDLY WEAPON TN ≠ 0, ADDRESSEE TN DIRECT FRIENDLY WEAPON TN TO CEASE CONDUCTING PROCEDURES INDICATED BY COMMAND MISSION.
18 - ASSUME DUTIES INDICATED	X	X			0	P	IF FRIENDLY WEAPON TN = 0, ADDRESSEE TN ASSUME DUTIES INDICATED IN THE DUTY ASSIGNMENT FUNCTIONAL AREA/DUTY ASSIGNMENT FIELDS. IF FRIENDLY WEAPON TN ≠ 0, ADDRESSEE TN DIRECT FRIENDLY WEAPON TN TO ASSUME DUTIES INDICATED IN THE DUTY ASSIGNMENT FUNCTIONAL AREA/DUTY ASSIGNMENT FIELDS.
19 - CEASE DUTIES INDICATED	X	X			0	P	IF FRIENDLY WEAPON TN = 0, ADDRESSEE TN CEASE PERFORMANCE OF DUTIES INDICATED IN THE DUTY ASSIGNMENT FUNCTIONAL AREA/DUTY ASSIGNMENT FIELDS. IF FRIENDLY WEAPON TN ≠ 0, ADDRESSEE TN DIRECT FRIENDLY WEAPON TN TO CEASE PERFORMANCE OF DUTIES INDICATED IN THE DUTY ASSIGNMENT FUNCTIONAL AREA/DUTY ASSIGNMENT FIELDS.
20 - TRANSFER CONTROL	X	X			0	P	ADDRESSEE TN TRANSFER CONTROL OF FRIENDLY WEAPON TN TO OBJECTIVE TN.
21 - RETURN TO BASE	X	X ⁵			0	P	IF FRIENDLY WEAPON TN = 0, ADDRESSEE TN RETURN TO BASE WHICH IS OBJECTIVE TN. IF FRIENDLY WEAPON TN ≠ 0, ADDRESSEE TN DIRECT FRIENDLY WEAPON TN TO RETURN TO BASE WHICH IS OBJECTIVE TN. IF OBJECTIVE TN = 0, BASE IS NOT SPECIFIED. ⁴

TABLE J9-2. Required Word Sequences and Receipt/Compliance Values for Command Values (Sheet 4 of 4)

COMMAND VALUE	J9.0 WORD SEQUENCE REQUIRED				R/C VAL ¹	MSG PRI ²	COMMAND VALUE DESCRIPTOR
	I	E0	C1	C2			
22 - LAUNCH ALERT AIRCRAFT	X	X ⁵			0	P	IF FRIENDLY WEAPON TN = 0, ADDRESSEE TN LAUNCH ALERT AIRCRAFT TO OBJECTIVE TN. IF FRIENDLY WEAPON TN ≠ 0, ADDRESSEE TN DIRECT FRIENDLY WEAPON TN TO LAUNCH ALERT AIRCRAFT TO OBJECTIVE TN. OBJECTIVE TN MAY DESIGNATE A TARGET, POINT, OR AIRCRAFT CONTROLLER. ⁴
23 - INVESTIGATE/ INTERROGATE	X	X ⁵			0	P	ENGAGE THE TARGET SPECIFIED IN OBJECTIVE TN WITH THE AIRCRAFT WHOSE TRACK NUMBER IS SPECIFIED IN FRIENDLY WEAPON TN. DO NOT FIRE ON OBJECTIVE TN UNTIL ORDERED, OR OBJECTIVE TN BECOMES ELIGIBLE FOR DESTRUCTION UNDER EXISTING DOCTRINE AND/OR RULES OF ENGAGEMENT. IF FRIENDLY WEAPON TN = 0, AIRCRAFT IS NOT SPECIFIED. ⁴
24 - INTERVENE	X	X ⁵			0	P	ADDRESSEE TN ORDER AIRCRAFT INDICATED IN FRIENDLY WEAPON TN TO TAKE ACTION TO DIVERT TARGET DESIGNATED BY OBJECTIVE TN FROM ITS INTENDED FLIGHT PATH. IF FRIENDLY WEAPON TN = 0, AIRCRAFT IS NOT SPECIFIED. ⁴
25 - SHADOW	X	X ⁵			0	P	ADDRESSEE TN ORDER PLATFORM INDICATED IN FRIENDLY WEAPON TN TO MAINTAIN SURVEILLANCE ON TARGET DESIGNATED BY OBJECTIVE TN. IF FRIENDLY WEAPON TN = 0, PLATFORM IS NOT SPECIFIED. ⁴
26 - UNDEFINED							
27 - ENGAGE TN OBJECTIVE WITH SPECIFIED NUMBER OF ASM/SSM TO MEET IMPACT TIME INDICATED	X			X	0	P	IF FRIENDLY WEAPON TN = 0, ADDRESSEE TN ENGAGE THE TARGET SPECIFIED IN OBJECTIVE TN WITH THE NUMBER OF MISSILES SPECIFIED TO MEET IMPACT TIME INDICATED IN HOUR/MINUTE/SECOND FIELDS. IF FRIENDLY WEAPON TN ≠ 0, ADDRESSEE TN DIRECT FRIENDLY WEAPON TN TO ENGAGE OBJECTIVE TN WITH NUMBER OF MISSILES SPECIFIED TO MEET IMPACT TIME INDICATED.
28 - PRIORITY KILL	X	X			0	P	ORDERS A HIGH PRIORITY ON THE DESTRUCTION OF SPECIFIC AIR TARGET FIRST.
29-31 - UNDEFINED	-	-	-		-	-	

NOTES

- 1 The initial transmission of the message requires the Receipt/Compliance field set to the value indicated in the column.
- 2 The message priority is as indicated in the column. P = Priority, R = Routine.
- 3 This word sequence may be addressed (R/C = 0) to a specific unit or broadcast R/C = 1 with the Addressee TN field set to 00177 octal.
- 4 If J9.0E0 not received, interpret as TN, Friendly Weapon = 0.
- 5 The J9.0E0 may be omitted from the transmission if all fields in the word, including TN, Friendly Weapon, would have been set to their No Statement/default values.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: COMMAND INITIAL WORD

49	48	47	46	45	44	43	42	41	40	39	38	37:	36	35:	34	33:	32	31	30	29	28:	27	26	25		
TRACK NUMBER, OBJECTIVE													:	WEAPON	:	:	COMMAND				:	---				
													:	TYPE	:	TW	CON	:					:			
													:	:	:	:					:					
19													:	2	:	2	:	5				:				

:	69	68	67	66:	65	64	63	62	61:	60:	59	58	57:	56:	55	54	53	52	51	50	
:	RECURRENCE			:						:	:	EX			:						
:	RATE, RECEIPT/			:	RECEIPT/COMPLIANCE					:	SP	DISUSED			:	IND	----				
:	COMPLIANCE			:						:	:				:	:					
:	4			:	5					:	1	:	3			:	1			:	

WORD DESCRIPTION

WORD NUMBER: J9.0I
WORD TITLE: COMMAND INITIAL WORD

REFERENCE		BIT #	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS
			RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0- 1	2
270 004	LABEL, J-SERIES	2- 6	5
271 005	SUBLABEL, J-SERIES	7- 9	3
800 001	MESSAGE LENGTH INDICATOR	10- 12	3
			0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
769 006	TRACK NUMBER, ADDRESSEE	13- 27	15
398 003	COMMAND	28- 32	5
391 002	THREAT WARNING CONDITION (TW CON)	33- 34	2
399 003	WEAPON TYPE	35- 36	2
769 010	TRACK NUMBER, OBJECTIVE	37- 55	19
385 003	EXERCISE INDICATOR (EX IND)	56	1
758 003	DISUSED	57- 59	3
756 001	SPARE (SP)	60	1
392 008	RECEIPT/COMPLIANCE	61- 65	5
444 025	RECURRENCE RATE, RECEIPT/COMPLIANCE (RRN R/C)	66- 69	4

FIELD CODING FOR J9.0I

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	006	TRACK NUMBER, ADDRESSEE -----		THE TN OF A UNIT (I.E., JU OR PU) TO WHICH A MESSAGE IS ADDRESSED.
		NO STATEMENT NUMERIC	0	
		ILLEGAL NUMERIC	00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		NUMERIC	00077 (OCTAL) 00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC	00177 (OCTAL)	COLLECTIVE ADDRESS.
		NUMERIC	00200 THROUGH 07776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL NUMERIC	07777 (OCTAL) 10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
398	003	COMMAND -----		EXPRESSES WEAPON ENGAGEMENT COMMANDS FOR AIR DEFENSE.
		WEAPONS FREE	0	FIRE ONLY AT TARGETS NOT RECOGNIZED AS FRIENDLY IN ACCORDANCE WITH CURRENT RULES OF ENGAGEMENT. COMMAND IS USED TO DISSEMINATE AN AREA/SECTOR WEAPONS RELEASE CONDITION.
		WEAPONS TIGHT	1	FIRE ONLY AT TARGETS POSITIVELY IDENTIFIED AS HOSTILE IN ACCORDANCE WITH CURRENT RULES OF ENGAGEMENT. COMMAND IS USED TO DISSEMINATE AN AREA/SECTOR WEAPONS RELEASE CONDITION.
		ENGAGE	2	ENGAGE THE TARGET SPECIFIED IN OBJECTIVE TN TO DESTRUCTION WITH WEAPON SPECIFIED IN WEAPON TYPE AND WHOSE TRACK NUMBER IS INDICATED IN FRIENDLY WEAPON TN. IF WEAPON TYPE IS ANY/ALL, PERFORM

			FIELD CODING FOR J9.0I	(SHEET 2)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
398	003	COMMAND -----	(CONTINUED)	
		ASSIGN	3	THOSE FUNCTIONS SPECIFIED FOR WEAPON SELECTED. PERFORM ALL FUNCTIONS OF ENGAGEMENT OF OBJECTIVE TN BUT DO NOT FIRE UNTIL ORDERED OR OBJECTIVE TN BECOMES ELIGIBLE FOR DESTRUCTION UNDER EXISTING DOCTRINE AND/OR RULES OF ENGAGEMENT. THE WEAPON SYSTEM TO BE USED IS SPECIFIED IN FRIENDLY WEAPON TN AND/OR WEAPON TYPE FIELD(S). IF WEAPON TYPE IS ANY/ALL, PERFORM THOSE FUNCTIONS SPECIFIED FOR THE WEAPON SELECTED.
		CEASE ENGAGE	4	BREAK THE ENGAGEMENT ON THE TARGET SPECIFIED IN OBJECTIVE TN WITH THE WEAPON SYSTEM SPECIFIED IN WEAPON TYPE AND WHOSE TRACK NUMBER IS INCLUDED IN FRIENDLY WEAPON TN. IF WEAPON TYPE IS MISSILE/CONVENTIONAL, DO NOT FIRE AT TARGET SPECIFIED IN OBJECTIVE TN. IF FIRING HAS OCCURRED, PERMIT MISSILES IN FLIGHT TO CONTINUE TO INTERCEPT. IF WEAPON TYPE IS ANY/ALL, AND FRIENDLY WEAPON TN=0, ALL WEAPONS EMPLOYED AGAINST OBJECTIVE TN ARE INDICATED.
		HOLD FIRE	5	EMERGENCY ORDER. IF WEAPON TYPE IS MISSILE/CONVENTIONAL, DO NOT FIRE AT TARGET SPECIFIED IN OBJECTIVE TN. IF FIRING HAS OCCURRED, DESTROY THE MISSILES IN FLIGHT. IF WEAPON TYPE IS AIRCRAFT, DISCONTINUE THE INTERCEPT. IF WEAPON TYPE IS ANY/ALL, TAKE ACTION SPECIFIED FOR WEAPON BEING EMPLOYED.
		CEASE FIRE	6	IF WEAPON TYPE IS MISSILE/CONVENTIONAL, DO NOT FIRE AT TARGET SPECIFIED IN OBJECTIVE TN. IF FIRING HAS OCCURRED, PERMIT MISSILES IN FLIGHT TO CONTINUE TO INTERCEPT. IF WEAPON TYPE IS

			FIELD CODING FOR J9.0I	(SHEET 3)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
398	003	COMMAND -----	(CONTINUED)	
		COVER	7	AIRCRAFT, DISCONTINUE THE INTERCEPT. IF WEAPON TYPE IS ANY/ ALL TAKE ACTION SPECIFIED FOR THE WEAPON BEING EMPLOYED. ADDRESSEE TN COVER OBJECTIVE TN. OBJECTIVE TN IS ENGAGED BY ANOTHER WEAPON SYSTEM OR HAS NOT YET BECOME A "SIGNIFICANT" THREAT. ADDRESSEE TN ASSUME POSTURE THAT WILL ALLOW ENGAGEMENT OF OBJECTIVE TN IF DIRECTED.
		SALVO/CLEAR AIRCRAFT	8	ADDRESSEE TN CLEAR FRIENDLY WEAPON TN FROM VICINITY OF OBJECTIVE TN. IF ADDRESSEE TN IS COLLECTIVE ADDRESS 00177, ALL UNITS CLEAR ALL FRIENDLY WEAPON PLATFORMS FROM VICINITY OF OBJECTIVE TN.
		ASSUME CONTROL	9	IF FRIENDLY WEAPON TN=0, ADDRESSEE TN ASSUME CONTROL OF OBJECTIVE TN. IF FRIENDLY WEAPON TN IS NOT EQUAL TO 0, ADDRESSEE TN DIRECT FRIENDLY WEAPON TN TO ASSUME CONTROL OF OBJECTIVE TN.
		ATTACK	10	IF FRIENDLY WEAPON TN=0, ADDRESSEE TN DIRECT ALL WEAPONS TO ATTACK. IF FRIENDLY WEAPON TN IS NOT =0, ADDRESSEE TN DIRECT FRIENDLY WEAPON TN TO ATTACK OBJECTIVE TN.
		CEASE ATTACK	11	IF FRIENDLY WEAPON TN=0, ADDRESSEE TN DIRECT ALL FRIENDLY WEAPONS TO CEASE ATTACK. IF FRIENDLY WEAPON TN IS NOT =0, ADDRESSEE TN DIRECT FRIENDLY WEAPON TN TO CEASE ATTACK.
		DISUSED PROCEED TO POINT	12 THROUGH 13 14	IF FRIENDLY WEAPON TN=0, ADDRESSEE TN PROCEED TO POINT DESIGNATED BY OBJECTIVE TN. IF FRIENDLY WEAPON TN IS NOT EQUAL TO 0, ADDRESSEE TN DIRECT FRIENDLY WEAPON TN TO PROCEED TO POINT DESIGNATED BY OBJECTIVE TN.

			FIELD CODING FOR J9.0I		(SHEET 4)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION	
398	003	COMMAND -----	(CONTINUED)		
		CEASE PROCEEDING TO POINT	15	IF FRIENDLY WEAPON TN=0, ADDRESSEE TN CEASE PROCEEDING TO POINT DESIGNATED BY OBJECTIVE TN. IF FRIENDLY WEAPON TN IS NOT EQUAL TO 0, ADDRESSEE TN DIRECT FRIENDLY WEAPON TN TO CEASE PROCEEDING TO POINT DESIGNATED BY OBJECTIVE TN.	
		CONDUCT PROCEDURES INDICATED	16	IF FRIENDLY WEAPON TN=0, ADDRESSEE TN CONDUCT PROCEDURES INDICATED BY COMMAND MISSION. IF FRIENDLY WEAPON TN IS NOT EQUAL TO 0, ADDRESSEE TN DIRECT FRIENDLY WEAPON TN TO CONDUCT PROCEDURES INDICATED BY COMMAND MISSION.	
		CEASE CONDUCTING PROCEDURES INDICATED	17	IF FRIENDLY WEAPON TN=0, ADDRESSEE TN CEASE CONDUCTING PROCEDURES INDICATED BY COMMAND MISSION. IF FRIENDLY WEAPON TN IS NOT EQUAL TO 0, ADDRESSEE TN DIRECT FRIENDLY WEAPON TN TO CEASE CONDUCTING PROCEDURES INDICATED BY COMMAND MISSION.	
		ASSUME DUTIES INDICATED	18	IF FRIENDLY WEAPON TN=0, ADDRESSEE TN ASSUME DUTIES INDICATED IN THE DUTY ASSIGNMENT FUNCTIONAL AREA/ DUTY ASSIGNMENT FIELDS. IF FRIENDLY WEAPON TN IS NOT EQUAL TO 0, ADDRESSEE TN DIRECT FRIENDLY WEAPON TN TO ASSUME DUTIES INDICATED IN THE DUTY ASSIGNMENT FUNCTIONAL AREA/DUTY ASSIGNMENT FIELDS.	
		CEASE DUTIES INDICATED	19	IF FRIENDLY TN=0, ADDRESSEE TN CEASE PERFORMANCE OF DUTIES INDICATED IN THE DUTY ASSIGNMENT FUNCTIONAL AREA/DUTY ASSIGNMENT FIELDS. IF FRIENDLY WEAPON TN IS NOT EQUAL TO 0, ADDRESSEE TN DIRECT FRIENDLY WEAPON TN TO CEASE PERFORMANCE OF DUTIES INDICATED IN THE DUTY ASSIGNMENT FUNCTIONAL AREA/DUTY ASSIGNMENT FIELDS.	
		TRANSFER CONTROL	20	ADDRESSEE TN TRANSFER CONTROL OF	

			FIELD CODING FOR J9.01	(SHEET 5)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
398	003	COMMAND -----	(CONTINUED)	
				FRIENDLY WEAPON TN TO OBJECTIVE TN.
		RETURN TO BASE	21	IF FRIENDLY WEAPON TN=0, ADDRESSEE TN RETURN TO BASE WHICH IS OBJECTIVE TN. IF FRIENDLY WEAPON TN IS NOT EQUAL TO 0, ADDRESSEE TN DIRECT FRIENDLY WEAPON TN TO RETURN TO BASE WHICH IS OBJECTIVE TN. IF OBJECTIVE TN=0, BASE IS NOT SPECIFIED.
		LAUNCH ALERT AIRCRAFT	22	IF FRIENDLY WEAPON TN=0, ADDRESSEE TN LAUNCH ALERT AIRCRAFT TO OBJECTIVE TN. IF FRIENDLY WEAPON TN IS NOT EQUAL TO 0, ADDRESSEE TN DIRECT FRIENDLY WEAPON TN TO LAUNCH ALERT AIRCRAFT TO OBJECTIVE TN. OBJECTIVE TN MAY DESIGNATE A TARGET, POINT, OR AIRCRAFT CONTROLLER.
		INVESTIGATE/INTERROGATE	23	ENGAGE THE TARGET SPECIFIED IN OBJECTIVE TN WITH THE AIRCRAFT WHOSE TRACK NUMBER IS SPECIFIED IN FRIENDLY WEAPON TN. DO NOT FIRE ON OBJECTIVE TN UNTIL ORDERED, OR OBJECTIVE TN BECOMES ELIGIBLE FOR DESTRUCTION UNDER EXISTING DOCTRINE AND/OR RULES OF ENGAGEMENT. IF FRIENDLY WEAPON TN=0, AIRCRAFT IS NOT SPECIFIED.
		INTERVENE	24	ADDRESSEE TN ORDER AIRCRAFT INDICATED IN FRIENDLY WEAPON TN TO TAKE ACTION TO DIVERT TARGET DESIGNATED BY OBJECTIVE TN FROM ITS INTENDED FLIGHT PATH. IF FRIENDLY WEAPON TN=0, AIRCRAFT IS NOT SPECIFIED.
		SHADOW	25	ADDRESSEE TN ORDER PLATFORM INDICATED IN FRIENDLY WEAPON TN TO MAINTAIN SURVEILLANCE ON TARGET DESIGNATED BY OBJECTIVE TN. IF FRIENDLY WEAPON TN=0, PLATFORM IS NOT SPECIFIED.
		UNDEFINED	26	

FIELD CODING FOR J9.0I

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
398	003	COMMAND -----	(CONTINUED)	
		ENGAGE TN OBJECTIVE WITH SPECIFIED NUMBER OF ASM/SSM TO MEET IMPACT TIME INDICATED	27	IF FRIENDLY WEAPON TN=0, ADDRESSEE TN ENGAGE THE TARGET SPECIFIED IN OBJECTIVE TN WITH THE NUMBER OF MISSILES SPECIFIED TO MEET IMPACT TIME INDICATED IN HOUR/MINUTE/ SECOND FIELDS. IF FRIENDLY WEAPON TN NOT = 0, ADDRESSEE TN DIRECT FRIENDLY WEAPON TN TO ENGAGE OBJECTIVE TN WITH NUMBER OF MISSILES SPECIFIED TO MEET IMPACT TIME INDICATED.
		PRIORITY KILL	28	ORDERS A HIGH PRIORITY ON THE DESTRUCTION OF A SPECIFIC AIR TARGET FIRST.
		UNDEFINED	29 THROUGH 31	
391	002	THREAT WARNING CONDITION -----		DESCRIBES THE GENERAL PREVAILING OP- ERATIONAL CONDITION OF ENEMY IM- PENDING THREAT IN TERMS OF COLOR CODES.
		NO STATEMENT	0	
		WHITE	1	
		YELLOW	2	
		RED	3	
399	003	WEAPON TYPE -----		INDICATES THE WEAPON SYSTEM TO BE USED IN ENGAGING A TARGET.
		ANY/ALL WEAPON SYSTEMS	0	
		AIRCRAFT	1	
		MISSILE	2	
		CONVENTIONAL	3	
769	010	TRACK NUMBER, OBJECTIVE -----		THE TN OF THE OBJECT OF THE ACTION DESCRIBED IN THE MESSAGE. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF

5.2-285

MIL-STD-6016B

FIELD CODING FOR J9.0I (SHEET 7)				
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	010	TRACK NUMBER, OBJECTIVE -----	(CONTINUED)	

ZERO THROUGH SEVEN. EACH THREE-BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6
00111	7
01000	A
01001	B
01010	C
01011	D
01100	E
01101	F
01110	G
01111	H
10000	J
10001	K
10010	L
10011	M
10100	N
10101	P
10110	Q
10111	R
11000	S
11001	T

FIELD CODING FOR J9.0I			(SHEET 8)
DFI	DUI	DUI/DI NAME	DUI/DI EXPLANATION
769	010	TRACK NUMBER, OBJECTIVE -----	(CONTINUED)
			11010 U
			11011 V
			11100 W
			11101 X
			11110 Y
			11111 Z
		00000	0
		00001-00076	1 THROUGH 62
		00077	63
		00100-00175	64 THROUGH 125
		00176	126
		00177	127
		00200-07776	128 THROUGH 4094
		07777	4095
		0A000-0Z777	4096 THROUGH 16383
		10000-17777	16384 THROUGH 20479
		1A000-1Z777	20480 THROUGH 32767
		20000-27777	32768 THROUGH 36863
		2A000-2Z777	36864 THROUGH 49151
			NO STATEMENT.
			ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
			ILLEGAL.
			ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
			RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
			COLLECTIVE ADDRESS.
			ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
			ILLEGAL.
			ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
			ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
			ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
			ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
			ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.

			FIELD CODING FOR J9.0I	(SHEET 9)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	010	TRACK NUMBER, OBJECTIVE -----	(CONTINUED)	
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		70000-77776	114688 THROUGH 118782	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.

		FIELD CODING FOR J9.0I		(SHEET 10)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	010	TRACK NUMBER, OBJECTIVE ----- 7A000-ZZ777	(CONTINUED) 118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
385	003	EXERCISE INDICATOR ----- NON-EXERCISE TRACK EXERCISE TRACK OR UNIT	0 1	INDICATES WHETHER OR NOT THE MESSAGE IDENTIFIES AN EXERCISE TRACK.
392	008	RECEIPT/COMPLIANCE ----- ORIGINAL ORDER ORIGINAL ORDER MACHINE RECEIPT WILCO (WILL COMPLY) HAVCO (HAVE COMPLIED) ORIGINAL ORDER CANTCO (CANNOT COMPLY) CANTPRO (CANNOT PROCESS)	0 1 2 3 4 5 6 7	RECEIPT/COMPLIANCE RESPONSE REQUIRED. RECEIPT/COMPLIANCE RESPONSE NOT REQUIRED. MUST BE USED IN CONJUNCTION WITH ORIGINAL ORDER MESSAGES ADDRESSED TO COLLECTIVE ADDRESSES. THE ORIGINAL ORDER SHALL BE TRANSMITTED 3 TIMES. MESSAGE RECEIVED ERROR FREE. THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER WILL COMPLY. IN THIS USAGE, THE SYSTEM COMPONENT IS A HUMAN OPERATOR OR (UNMANNED VEHICLE ONLY) A MACHINE. THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER HAS COMPLIED. IN THIS USAGE, THE SYSTEM COMPONENT MAY BE A HUMAN OPERATOR OR A MACHINE. RECEIPT/COMPLIANCE RESPONSE (MR AND/ OR CANTPRO ONLY) REQUIRED. THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER CANNOT COMPLY. IN THIS USAGE, THE SYSTEM COMPONENT IS A HUMAN OPERATOR OR (UNMANNED VEHICLE ONLY) A MACHINE. NON-SPECIFIC SYSTEM LIMITATION OR CONFLICT. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE

FIELD CODING FOR J9.0I				(SHEET 11)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
		CANTPRO (CANNOT PROCESS)	8	THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED. TIME SLOT ASSIGNMENT CONFLICT DETECTED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	9	CRYPTOVARIABLE NOT HELD. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	10	PARTICIPATION GROUP NOT DEFINED. THIS IS AN AUTOMATIC COMPUTER- GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	11	APPLICABLE ASSIGNMENT TABLE FULL. THIS IS AN AUTOMATIC COMPUTER- GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	12	RELAY FUNCTION SPECIFIED ALREADY HAS ASSIGNED TIME SLOT BLOCKS FOR WHICH A DIFFERENT RELAY MODE/NET NUMBER HAS BEEN SPECIFIED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	13	INTERFERENCE PROTECTION FEATURES WOULD BE VIOLATED BY ACCEPTANCE OF ASSIGNMENT. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND

FIELD CODING FOR J9.0I				(SHEET 12)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
		CANTPRO (CANNOT PROCESS)	14	THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	15	HOST SUBSCRIBER INTERFACE IS INACTIVE AND MESSAGE IS NOT PROCESSED BY THE TERMINAL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	16	TN, ADDRESSEE DOES NOT IMPLEMENT THE ACTION REQUESTED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	17	ONE OR MORE TNS IN THE OM NOT HELD. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	18	TN, REFERENCE OR TN, FRIENDLY WEAPON IS UNDER OWN UNIT CONTROL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	19	UNIT NOT EXERCISING AIR CONTROL CAPABILITY. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)		UNACCEPTABLE IDENTITY. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT

5.2-292

FIELD CODING FOR J9.0I				(SHEET 13)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
		CANTPRO (CANNOT PROCESS)	20	BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED. ADDRESSEE TN IS INACTIVE. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	21	THE FORWARDING UNIT DID NOT RECEIVE A MACHINE RECEIPT FROM THE ADDRESSEE TN. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	22	TN, REFERENCE OR TN, FRIENDLY WEAPON IS NOT UNDER THIS UNIT'S CONTROL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		UNDEFINED NO STATEMENT	23 THROUGH 30 31	
444	025	RECURRENCE RATE, RECEIPT/ COMPLIANCE -----		IDENTIFIES THE TIME SLOT IN WHICH THE RECEIPT/COMPLIANCE FOR THE MESSAGE IS TO BE TRANSMITTED.
		NO STATEMENT	0	
		NUMERIC	1 THROUGH 15	THE NUMERIC VALUE FOR RECEIPT/ COMPLIANCE, SPECIFIED AS RECURRENCE RATE NUMBER, DEFINES THE NUMBER N OF CONSECUTIVE TIME SLOTS FROM THE ORIGINAL TRANSMISSION TO THE DONATED TIME SLOT: N=3X2 TO THE (15-RRN) POWER.

MIL-STD-6016B

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J9.0E0
WORD TITLE: COMMAND EXTENSION WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00				
<---					:	NUMBER OF AIRCRAFT					:	COMMAND MISSION					:	DUTY ASSIGNMENT					:	WORD				
					:						:						:						:	FORMAT				
					:	6					:	5					:	6					:	2				
49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25				
					:	DUTY ASSIGNMENT:					:	THREAT					:						:					
<---					:	FUNCTIONAL AREA:					:	WARNING					:	DUD					:	DISUSED				
					:						:						:						:	DISUSED				
					:	ENVIRONMENT:					:						:						:					
					:	4					:	3					:	2					:	5				
					:						:						:						:	16				
					:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50			
					:						:						:						:					
					:						:	TRACK NUMBER, FRIENDLY WEAPON					:						:	SP				
					:						:						:						:					
					:						:	19					:						:	2				

WORD DESCRIPTION

WORD NUMBER: J9.0E0
WORD TITLE: COMMAND EXTENSION WORD

REFERENCE DFI/DUI	DATA FIELD DESCRIPTOR	BIT #		RESOLUTION, CODING, ETC
		POSITION	BITS	
1550 001	WORD FORMAT	0-	1 2	10
702 002	DUTY ASSIGNMENT	2-	7 6	
701 002	COMMAND MISSION	8-	12 5	
1898 001	NUMBER OF AIRCRAFT	13-	18 6	
758 016	DISUSED	19-	34 16	
758 005	DISUSED	35-	39 5	
758 002	DISUSED (DUD)	40-	41 2	
814 001	THREAT WARNING ENVIRONMENT	42-	44 3	
501 001	DUTY ASSIGNMENT FUNCTIONAL AREA	45-	48 4	
756 002	SPARE (SP)	49-	50 2	
769 004	TRACK NUMBER, FRIENDLY WEAPON	51-	69 19	

FIELD CODING FOR J9.0E0

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
702	002	DUTY ASSIGNMENT -----		DEFINES, IN CONJUNCTION WITH DUTY ASSIGNMENT FUNCTIONAL AREA, THE FUNCTIONS OR DUTIES ASSIGNED TO A UNIT OR ELEMENT.
		----- FOR NO STATEMENT (0) -----		
		ILLEGAL NO STATEMENT	0 THROUGH 62 63	
		----- FOR COMMAND (1) -----		
		OFFICER IN TACTICAL COMMAND (OTC)	0	
		COMPOSITE WARFARE COMMANDER (CWC)	1	
		SCREEN COMMANDER (SC)	2	
		UNDEFINED	3 THROUGH 62	
		NO STATEMENT	63	
		----- FOR ANTIAIR WARFARE (2) -----		
		AAW COMMANDER (AAWC)	0	
		SECTOR AAW COORDINATOR (SAAWC)	1	
		LOCAL AAW COORDINATOR (LAAWC)	2	
		AAW PICKET (WATCHDOG)	3	
		TOMCAT	4	
		UNDEFINED	5 THROUGH 62	
		NO STATEMENT	63	
		----- FOR ANTISUBMARINE WARFARE (3) -----		
		ASW COMMANDER (ASWC)	0	

FIELD CODING FOR J9.0E0

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
702	002	DUTY ASSIGNMENT	(CONTINUED)	

		SECTOR ASW COMMANDER	1	
		(SASWC)		
		LOCAL ASW COMMANDER	2	
		(LASWC)		
		SEARCH AND ATTACK UNIT	3	
		COMMANDER (SAUC)		
		SSN LINK SHIP	4	
		SUBMARINE ELEMENT	5	
		COORDINATOR (SEC)		
		UNDEFINED	6 THROUGH 62	
		NO STATEMENT	63	

		FOR ANTISURFACE WARFARE		
		(4)		

		ASUW COMMANDER (ASUWC)	0	
		SECTOR ASUW COMMANDER	1	
		(SASUWC)		
		SURFACE ACTION GROUP	2	
		COMMANDER (SAGC)		
		HELICOPTER ATTACK	3	
		GROUP COMMANDER (HAGC)		
		SENIOR OFFICER FPB	4	
		(SOFPB)		
		SURFACE PICKET	5	
		UNDEFINED	6 THROUGH 62	
		NO STATEMENT	63	

		FOR ELECTRONIC WARFARE		
		(5)		

		EW COORDINATOR (EWC)	0	
		CHAFF GUARDSHIP	1	
		UNDEFINED	2 THROUGH 62	
		NO STATEMENT	63	

5.2-297

MIL-STD-6016B

FIELD CODING FOR J9.0E0

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
702	002	DUTY ASSIGNMENT	(CONTINUED)	
		----- FOR AMPHIBIOUS WARFARE (6) -----		
		SUPPORTING ARMS	0	
		COORDINATION CENTER (SACC)		
		TACTICAL AIR	1	
		COORDINATION CENTER (TACC)		
		PRIMARY CONTROL SHIP (PCS)	2	
		SECONDARY CONTROL SHIP (SCS)	3	
		HELO CONTROL SHIP (HCS)	4	
		HELO DIRECTION CENTER (HDC)	5	
		BOAT HAVEN, SPECIFIC BEACH COLOR	6	
		PRIMARY CASUALTY RECEIVING AND EVACUATION CONTROL SHIP (PCRS)	7	
		SECONDARY CASUALTY RECEIVING AND EVACUATION CONTROL SHIP (SCRS)	8	
		CENTRAL CONTROL SHIP (CCS)	9	
		DIRECT SUPPORT NAVAL GUNFIRE SUPPORT SHIP (DSNGSS)	10	
		GENERAL SUPPORT NAVAL GUNFIRE SUPPORT SHIP (GNSNGSS)	11	
		UNDEFINED	12 THROUGH 62	
		NO STATEMENT	63	
		----- FOR DATA COMPILATION (7) -----		

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
702	002	DUTY ASSIGNMENT	(CONTINUED)	

		FORCE TRACK COORDINATOR	0	
		AIR (FTC-A)		
		FORCE TRACK COORDINATOR	1	
		SUBSURFACE (FTC-SS)		
		FORCE TRACK COORDINATOR	2	
		SURFACE (FTC-S)		
		GRID REFERENCE UNIT	3	
		(GRU)		
		LINK 11 DATA NET	4	
		CONTROL STATION		
		(LINK 11 DNCS)		
		LINK 11 BROADCAST UNIT	5	
		LINK 10 DATA NET	6	
		CONTROL STATION (L10		
		DNCS)		
		LINK 4A CONTROL UNIT	7	
		(LINK 4A CU)		
		LINK 10/LINK 11	8	
		GATEWAY UNIT		
		LINK 14 BROADCAST UNIT	9	
		LINK 16 NETWORK MANAGER	10	
		LINK 16 STANDBY	11	
		NETWORK MANAGER		
		LINK 16 SUB-NETWORK	12	
		MANAGER		
		LINK 16 NETWORK TIME	13	
		REFERENCE (LINK 16		
		NTR)		
		LINK 16 NAVIGATION	14	
		CONTROLLER (LINK 16		
		NC)		
		LINK 16 POSITION	15	
		REFERENCE (LINK 16 PR)		
		LINK 16 NET CONTROL	16	
		STATION (LINK 16 NCS)		
		LINK 16 INITIAL ENTRY	17	
		MIDS UNIT		
		LINK 16 CRYPTONET	18	
		MANAGER		
		FORWARDING MIDS	19	
		UNIT A		
		FORWARDING MIDS	20	
		UNIT B		

FIELD CODING FOR J9.0E0

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
702	002	DUTY ASSIGNMENT	(CONTINUED)	

		FORWARDING MIDS	21	
		UNIT AB		
		IJMS NET MANAGEMENT	22	
		STATION		
		IJMS NET TIME REFERENCE	23	
		UNDEFINED	24 THROUGH 62	
		NO STATEMENT	63	

		FOR AIR COORDINATION/ CONTROL (8)		

		AIR COORDINATOR (AC)	0	
		FORCE MARSHALLER (FM)	1	
		AIR RESOURCE ELEMENT	2	
		COORDINATOR (AREC)		
		HELICOPTER ELEMENT	3	
		COORDINATOR (HEC)		
		HELICOPTER CONTROL	4	
		UNIT (HCU)		
		ASW AIRCRAFT CONTROL	5	
		UNIT (ASWACU)		
		AAW AIRCRAFT CONTROL	6	
		UNIT (AAWACU)		
		ATTACK AIRCRAFT CONTROL	7	
		UNIT (AACU)		
		AEW CONTROL UNIT (AEWCU)	8	
		AIR CONTROL UNIT (ACU)	9	
		UNDEFINED	10 THROUGH 62	
		NO STATEMENT	63	

		FOR SPECIAL DUTIES (9)		

		AIRSTRIKE SAFETY SHIP	0	
		(SAFETY CELL)		
		BALLISTIC WINDFINDING	1	
		GUARDSHIP		
		BATHYTHERMOGRAPHIC GUARD	2	
		CONSORT	3	
		CONTROL SHIP	4	

FIELD CODING FOR J9.0E0

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
702	002	DUTY ASSIGNMENT	(CONTINUED)	

		DECEPTION GROUP	5	
		COMMANDER (DCGC)		
		DELIVERING SHIP	6	
		DISABLED SHIP	7	
		DUTY CARRIER	8	
		EMERGENCY LANDING	9	
		CARRIER		
		FIRING SHIP	10	
		FLANK MARKING OR RAKE	11	
		SHIP		
		GOALKEEPER ON HVU	12	
		HOST SHIP	13	
		IFF GUARDSHIP	14	
		ILLUMINATING SHIP	15	
		MAINBODY GROUP COMMANDER	16	
		(MBGC)		
		MAN OVERBOARD RECOVERY	17	
		SHIP		
		MEDICAL GUARD	18	
		METEOROLOGICAL GUARD	19	
		MILITARY GUARD	20	
		NET CONTROL STATION	21	
		(NCS)		
		OFFICER CONDUCTING	22	
		EXERCISE (OCE)		
		OFFICER CONDUCTING	23	
		SERIAL (OCS)		
		PHYSICAL BARRIER	24	
		RADAR GUARDSHIP	25	
		RADAR PICKET	26	
		RADHAZ RELAY	27	
		RADIO LINK	28	
		READY DUTY SHIP	29	
		RECEIVING SHIP	30	
		RECOVERY SHIP	31	
		REPLENISHMENT UNIT GUIDE	32	
		RESCUE DESTROYER	33	
		SCENE OF ACTION	34	
		COMMANDER (SAC)		
		SEARCH AND RESCUE (SAR)	35	
		SHIP		
		SENIOR OFFICER PRESENT	36	
		AFLOAT (SOPA)		

FIELD CODING FOR J9.0E0

(SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
702	002	DUTY ASSIGNMENT	(CONTINUED)	

		TACAN GUARD	37	
		TARGET SHIP	38	
		TATTLETALE	39	
		TOWING SHIP	40	
		UNDERWAY REPLENISHMENT	41	
		GROUP COMMANDER (URGC)		
		UNIT RESPONSIBLE FOR	42	
		SURFACING THE		
		SUBMARINE		
		VISUAL COMMUNICATION	43	
		DUTY SHIP FOR SHIP		
		ALONGSIDE		
		VISUAL LINK BETWEEN	44	
		SHIPS INDICATED		
		WEAPON-CARRYING	45	
		HELICOPTER STANDBY		
		SHIP		
		WEATHER BALLOON TRACKING	46	
		SHIP		
		UNDEFINED	47 THROUGH 62	
		NO STATEMENT	63	

		FOR JOINT SURVEILLANCE		
		TARGET ATTACK RADAR		
		SYSTEM (JSTARS) (10)		

		UNDEFINED	0 THROUGH 62	
		NO STATEMENT	63	

		FOR THEATER MISSILE		
		DEFENSE (TMD) (11)		

		UNDEFINED	0 THROUGH 62	
		NO STATEMENT	63	

		FOR UNDEFINED (12-15)		

5.2-302

MIL-STD-6016B

FIELD CODING FOR J9.0E0

(SHEET 8)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
702	002	DUTY ASSIGNMENT	(CONTINUED)	

		UNDEFINED	0 THROUGH 62	
		NO STATEMENT	63	
701	002	COMMAND MISSION		

		HOLD DOWN	0	
		SEARCH AND RESCUE	1	
		RENDEZVOUSING	2	
		IDENTIFICATION	3	
		SAFEGUARD	4	
		ASW SEARCH	5	
		SCREEN	6	
		PROCEDURE 1	7	
		PROCEDURE 2	8	
		PROCEDURE 3	9	
		PROCEDURE 4	10	
		PROCEDURE 5	11	
		PROCEDURE 6	12	
		PROCEDURE 7	13	
		PROCEDURE 8	14	
		PROCEDURE 9	15	
		PROCEDURE 10	16	
		PROCEDURE 11	17	
		PROCEDURE 12	18	
		PROCEDURE 13	19	
		PROCEDURE 14	20	
		PROCEDURE 15	21	
		PROCEDURE 16	22	
		PROCEDURE 17	23	
		PROCEDURE 18	24	
		PROCEDURE 19	25	
		PROCEDURE 20	26	
		CLOSE AIR SUPPORT	27	
		ARMED RECONNAISSANCE	28	
		AERIAL RECONNAISSANCE	29	
		SUPPRESSION OF ENEMY AIR	30	
		DEFENSES (SEAD)		
		NO STATEMENT	31	
1898	001	NUMBER OF AIRCRAFT		

		0 THROUGH 62 AIRCRAFT	0 THROUGH 62	
		NO STATEMENT	63	

FIELD CODING FOR J9.0E0

(SHEET 9)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
814	001	THREAT WARNING ENVIRONMENT -----		DESCRIBES THE ENVIRONMENT FROM WHICH A THREAT CAN BE EXPECTED.
		NO STATEMENT	0	
		AIR	1	
		SURFACE (MARITIME)	2	
		MINES	3	
		SUBSURFACE (MARITIME)	4	
		LAND (GROUND)	5	
		SPACE	6	
		UNDEFINED	7	
501	001	DUTY ASSIGNMENT FUNCTIONAL AREA -----		DEFINES THE FUNCTIONAL AREA WITHIN WHICH A DUTY ASSIGNMENT IS MADE.
		NO STATEMENT	0	
		COMMAND	1	
		ANTI-AIR WARFARE	2	
		ANTI-SUBMARINE WARFARE	3	
		ANTI-SURFACE WARFARE	4	
		ELECTRONIC WARFARE	5	
		AMPHIBIOUS WARFARE	6	
		DATA COMPILATION	7	
		AIR COORDINATION/CONTROL	8	
		SPECIAL DUTIES	9	
		JOINT SURVEILLANCE AND	10	
		TARGET ATTACK RADAR		
		SYSTEM (JSTARS)		
		THEATER MISSILE DEFENSE	11	
		(TMD)		
		UNDEFINED	12 THROUGH 15	
769	004	TRACK NUMBER, FRIENDLY WEAPON -----		THE TN OF THE FRIENDLY WEAPON. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE- BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN.

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	004	TRACK NUMBER, FRIENDLY WEAPON -----	(CONTINUED)	

THEREFORE, ANY TN CAN BE REPRESENTED BY AANN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6
00111	7
01000	A
01001	B
01010	C
01011	D
01100	E
01101	F
01110	G
01111	H
10000	J
10001	K
10010	L
10011	M
10100	N
10101	P
10110	Q
10111	R
11000	S
11001	T
11010	U
11011	V
11100	W

FIELD CODING FOR J9.0E0

(SHEET 11)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	004	TRACK NUMBER, FRIENDLY WEAPON -----	(CONTINUED)	
				11101 X
				11110 Y
				11111 Z
		00000	0	NO STATEMENT.
		00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU). ILLEGAL.
		00077	63	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU). RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		00100-00175	64 THROUGH 125	COLLECTIVE ADDRESS.
		00176	126	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		00177	127	ILLEGAL.
		00200-07776	128 THROUGH 4094	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		07777	4095	ILLEGAL.
		0A000-0Z777	4096 THROUGH 16383	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		10000-17777	16384 THROUGH 20479	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		20000-27777	32768 THROUGH 36863	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL

FIELD CODING FOR J9.0E0

(SHEET 12)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	004	TRACK NUMBER, FRIENDLY WEAPON -----	(CONTINUED)	
		3A000-3Z777	53248 THROUGH 65535	INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS. ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		70000-77776	114688 THROUGH 118782	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND

5.2-307

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	004	TRACK NUMBER, FRIENDLY WEAPON -----	(CONTINUED)	REFERENCE POINTS.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J9.0C1
WORD TITLE: COMMAND CONTINUATION WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00	:		
VOICE CALL SIGN																		:	CONTINUATION WORD			:	WORD		:		
																		:	LABEL			:	FORMAT		:		
																		:				:			:		
24																		:	5			:	2		:		
49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25	:		
CONTROL CHANNEL					:	VOICE FREQUENCY/CHANNEL														:						---	
					:															:						-->	
7					:	13														:							
					:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50	:	
					:															:	METHOD OF			:	VFC:SEC:		:
					:	SPARE														:	FIRE			:	IND:IND:		---
					:															:				:			:
					:	14														:	3			:	1 : 1		:

WORD DESCRIPTION

WORD NUMBER: J9.0C1
WORD TITLE: COMMAND CONTINUATION WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	00001
264 001	VOICE CALL SIGN	7-	30 24	
417 016	VOICE FREQUENCY/CHANNEL	31-	43 13	
348 006	CONTROL CHANNEL	44-	50 7	
1649 001	SECURE RADIO INDICATOR (SEC IND)	51	1	
898 001	VOICE FREQUENCY/CHANNEL INDICATOR (VFC IND)	52	1	
1050 001	METHOD OF FIRE	53-	55 3	
756 014	SPARE	56-	69 14	

FIELD CODING FOR J9.0C1 (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
264	001	VOICE CALL SIGN -----		AN ALPHANUMERICALLY-CODED CALL SIGN USED IN VOICE COMMUNICATIONS TO IDENTIFY A FORCE ELEMENT. THE 24 BITS ARE DIVIDED INTO FOUR GROUPS OF 6 BITS. EACH GROUP IS INTERPRETED INDEPENDENTLY IN ACCORDANCE WITH THE FOLLOWING CODE:
		BLANK	0	
		1	1	
		2	2	
		3	3	
		4	4	
		5	5	
		6	6	
		7	7	
		8	8	
		9	9	
		A	10	
		B	11	
		C	12	
		D	13	
		E	14	
		F	15	
		G	16	
		H	17	
		I	18	
		J	19	
		K	20	
		L	21	
		M	22	
		N	23	
		O	24	
		P	25	
		Q	26	
		R	27	
		S	28	
		T	29	
		U	30	
		V	31	
		W	32	
		X	33	
		Y	34	
		Z	35	
		UNDEFINED	36 THROUGH 62	

FIELD CODING FOR J9.0C1

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
264	001	VOICE CALL SIGN ----- 0 (ZERO)	(CONTINUED) 63	
417	016	VOICE FREQUENCY/CHANNEL ----- NO STATEMENT UHF FREQUENCY ILLEGAL CHANNEL GROUP A CHANNEL GROUP B ILLEGAL	 0 1 THROUGH 7000 7001 THROUGH 7039 7040 THROUGH 7167 7168 THROUGH 7295 7296 THROUGH 8191	IDENTIFIES A UHF VOICE RADIO CHANNEL NUMBER TO ACCOUNT FOR 7000 POSSIBLE RADIO FREQUENCIES IN THE 225 TO 400 MHZ BAND OR THE OPTION OF SELECTING CHANNEL GROUP A OR CHANNEL GROUP B. THE BIT CODE IS RELATED TO THE UHF FREQUENCY BY USING THE FOLLOWING FORMULA: FREQ(MHZ) = 225 + .025(N-1) WHERE N = BIT CODE NUMBER. 128 CHANNELS FROM 0-127. 128 CHANNELS FROM 0-127.
348	006	CONTROL CHANNEL ----- CONTROL CHANNEL NUMBER NO STATEMENT	 0 THROUGH 126 127	
1649	001	SECURE RADIO INDICATOR ----- NO STATEMENT RADIO IN SECURE MODE	 0 1	SPECIFIES WHETHER OR NOT A RADIO IS OPERATING IN THE SECURE MODE.
898	001	VOICE FREQUENCY/CHANNEL INDICATOR ----- PRIMARY VOICE FREQUENCY/ CHANNEL ALTERNATE VOICE FREQUENCY/CHANNEL	 0 1	INDICATES WHETHER THE VOICE FREQUENCY/CHANNEL IN THE MESSAGE IS THE PRIMARY OR THE ALTERNATE VOICE FREQUENCY/CHANNEL. THE VOICE FREQUENCY/CHANNEL IS THE PRIMARY VOICE FREQUENCY/CHANNEL. THE VOICE FREQUENCY/CHANNEL IS THE ALTERNATE VOICE FREQUENCY/CHANNEL.
1050	001	METHOD OF FIRE ----- NO STATEMENT SINGLE SHOT	 0 1	PROVIDES THE PLANNED MOF FOR ENGAGEMENT OF TN OBJECTIVE BY TN SOURCE. TARGET WILL BE ENGAGED WITH ONE

5.2-313

MIL-STD-6016B

FIELD CODING FOR J9.0C1 (SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1050	001	METHOD OF FIRE -----	(CONTINUED)	
		DUAL SHOT	2	SHOT. TARGET WILL BE ENGAGED WITH TWO SHOTS.
		MULTIPLE SHOT	3	TARGET WILL BE ENGAGED WITH THREE OR MORE SHOTS.
		SHOOT-LOOK-SHOOT	4	TARGET WILL BE ENGAGED WITH ONE SHOT. IF ENGAGEMENT IS EVALUATED AS UNSUCCESSFUL, A SECOND SINGLE SHOT ENGAGEMENT IS INITIATED.
		UNDEFINED	5 THROUGH 7	

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J9.0C2
WORD TITLE: COMMAND CONTINUATION WORD 2

24:	23	22	21	20	19	18:	17	16	15	14	13	12:	11	10	09	08	07:	06	05	04	03	02:	01	00:			
<---	:	SECOND					:	MINUTE					:	HOUR					:	CONTINUATION WORD LABEL					:	WORD	:
:	:	6					:	6					:	5					:	5					:	2	:
49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27:	26	25			
																								:	NUMBER		
																								:	OF		
																								:	MISSILE		
																								:	S		
																								:	3		
					:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50		
					:																						
					:																						
					:																						
					:																						
					:																						

WORD DESCRIPTION

WORD NUMBER: J9.0C2

WORD TITLE: COMMAND CONTINUATION WORD 2

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	00010
792 001	HOUR	7-	11 5	
797 004	MINUTE	12-	17 6	
380 001	SECOND	18-	23 6	
1599 001	NUMBER OF MISSILES	24-	26 3	
756 043	SPARE	27-	69 43	

FIELD CODING FOR J9.0C2

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
792	001	HOUR ----- 0 HOUR 1 THROUGH 23 HOURS ILLEGAL NO STATEMENT	0 1 THROUGH 23 24 THROUGH 30 31	EXPRESSES TIME OF DAY OR A PERIOD OF TIME IN HOURS. IN ONE HOUR INCREMENTS.
797	004	MINUTE ----- 0 THROUGH 59 ILLEGAL NO STATEMENT	0 THROUGH 59 60 THROUGH 62 63	THE MINUTE OF THE HOUR. IN ONE MINUTE INCREMENTS.
380	001	SECOND ----- 0 THROUGH 59 ILLEGAL NO STATEMENT	0 THROUGH 59 60 THROUGH 62 63	THE SECOND OF THE MINUTE. IN ONE SECOND INCREMENTS.
1599	001	NUMBER OF MISSILES ----- ALL AVAILABLE 1 THROUGH 7 MISSILES	0 1 THROUGH 7	NUMBER OF MISSILES TO BE LAUNCHED. IN INCREMENTS OF ONE.

MIL-STD-6016B

J9.1 MESSAGE SUMMARY

PURPOSE

The J9.1 Engagement Coordination message provides the means for two or more elements to coordinate engagements in order to conduct more efficient engagements and to reduce the probability of wasted resources.

DATA ELEMENT SUMMARY

<u>J9.1I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
TRACK NUMBER, ADDRESSEE	15
TRACK NUMBER, OBJECTIVE	19
METHOD OF FIRE	3
ENGAGEMENT COORDINATION ACTION VALUE	4
PROBABILITY OF KILL	3
TRACKING STATUS	2
SPARE	2
RECEIPT/COMPLIANCE	5
RECURRENCE RATE, RECEIPT/ COMPLIANCE	4

MIL-STD-6016B

J9.1 TRANSMIT/RECEIVE RULES

TITLE: Engagement Coordination Message

TRANSMIT RULES

1. The J9.1 Engagement Coordination message shall be transmitted by any C² JU participating in an engagement coordination process. The R/C value for the J9.1 message shall be set to value 5 if addressed to a specific JU, or value 1 if addressed to the Collective Address (00177 octal).
2. Transmission of the J9.1 message with the various R/C values set shall be in accordance with the procedures specified in paragraph 4.1.7.
3. Table J9-3 summarizes transmit rules for each Engagement Coordination Action Value (ECAV) of the J9.1 message.

RECEIVE RULES

Table J9-3 summarizes receive rules for each Engagement Coordination Action Value (ECAV) of the J9.1 message.

Table J9-3 Transmit/Receive Rules for Engagement Coordination Action Values
(1 of 2)

ECAV	TRANSMIT RULES	RECEIVE RULES
0 = Intend to Engage 1 = Do Not Intend to Engage	Shall only be transmitted to announce a JU's engagement intention against a target. Shall be addressed to the Collective Address.	No required reply.
2 = Available for Support	Shall be transmitted by a JU in response to the J9.1 ECAV = 4 (Support Expected), if the JU is available to support a coordinated engagement. May be transmitted by a JU at any time to report availability to support another JU. Shall be transmitted when a JU becomes available for support after responding to a J9.1 ECAV = 4 (Support Expected) with an ECAV = 3 (Not Available for Support). May be addressed to a specific JU or to the Collective Address.	No required reply other than specified Receipt/Compliance rules.
3 = Not Available for Support	Shall be transmitted by a JU in response to the J9.1 ECAV = 4 (Support Expected), if the JU is not available to support a coordinated engagement. May be transmitted by a JU at any time to report non-availability to support another JU. Shall be transmitted when a JU becomes unavailable for support after responding to a J9.1 ECAV = 4 (Support Expected) with an ECAV = 2 (Available for Support). May be addressed to a specific JU or to the Collective Address.	No required reply other than specified Receipt/Compliance rules.

Table J9-3 Transmit/Receive Rules for Engagement Coordination Action Values
(2 of 2)

ECAV	TRANSMIT RULES	RECEIVE RULES
4 = Support Expected	J9.1 ECAV = 4 (Support Expected) shall only be transmitted when a JU intends to engage a threat and expects support from one or more JUs. May be addressed to a specific JU or to the Collective Address.	Receiving JU(s) shall reply by transmitting a J9.1 ECAV = 2 (Available for Support) or 3 (Not Available for Support).
5 = Support Not Expected	J9.1 ECAV = 5 (Support not Expected) shall only be transmitted when a JU intends to engage a threat, and expects no engagement support from receiving JU(s). May be addressed to a specific JU or to the Collective Address.	No required reply other than specified Receipt/Compliance rules.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J9.1I
WORD TITLE: ENGAGEMENT COORDINATION INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00	
TRACK NUMBER, ADDRESSEE												:	MESSAGE	:	SUBLABEL,	:							:	WORD	:
												:	LENGTH	:	J-SERIES	:	LABEL, J-SERIES	:	FORMAT	:			:		:
												:	INDICATOR	:		:							:		:
15												:	3	:	3	:	5	:	2	:			:		:
49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25	
:	METHOD OF	:																				:			
:	FIRE	:																				:			---
:		:																				:			
:	3	:																				:			
												:	19	:		:						:			
69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50						
:	RECURRENCE	:																				:			
:	RATE, RECEIPT/	:	RECEIPT/COMPLIANCE	:	SP	:	TKNG	:	PK	:												:			
:	COMPLIANCE	:		:		:	STAT	:		:												:			
:	4	:	5	:	2	:	2	:	3	:	4	:										:			

WORD DESCRIPTION

WORD NUMBER: J9.1I

WORD TITLE: ENGAGEMENT COORDINATION INITIAL WORD

REFERENCE			BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS		RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1	2	00
270 004	LABEL, J-SERIES	2-	6	5	01001
271 005	SUBLABEL, J-SERIES	7-	9	3	001
800 001	MESSAGE LENGTH INDICATOR	10-	12	3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
769 006	TRACK NUMBER, ADDRESSEE	13-	27	15	
769 010	TRACK NUMBER, OBJECTIVE	28-	46	19	
1050 001	METHOD OF FIRE	47-	49	3	
1075 001	ENGAGEMENT COORDINATION ACTION VALUE (ECAV)	50-	53	4	
1001 001	PROBABILITY OF KILL (PK)	54-	56	3	
1627 001	TRACKING STATUS (TKNG STAT)	57-	58	2	
756 002	SPARE (SP)	59-	60	2	
392 008	RECEIPT/COMPLIANCE	61-	65	5	
444 025	RECURRENCE RATE, RECEIPT/ COMPLIANCE (RRN R/C)	66-	69	4	

			FIELD CODING FOR J9.1I	(SHEET 1)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	006	TRACK NUMBER, ADDRESSEE -----		THE TN OF A UNIT (I.E., JU OR PU) TO WHICH A MESSAGE IS ADDRESSED.
		NO STATEMENT NUMERIC	0 00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		ILLEGAL NUMERIC	00077 (OCTAL) 00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC NUMERIC	00177 (OCTAL) 00200 THROUGH 07776 (OCTAL)	COLLECTIVE ADDRESS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL NUMERIC	07777 (OCTAL) 10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
769	010	TRACK NUMBER, OBJECTIVE -----		THE TN OF THE OBJECT OF THE ACTION DESCRIBED IN THE MESSAGE. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE- BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANNN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC

FIELD CODING FOR J9.1I (SHEET 2)				
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	010	TRACK NUMBER, OBJECTIVE -----	(CONTINUED)	

CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6
00111	7
01000	A
01001	B
01010	C
01011	D
01100	E
01101	F
01110	G
01111	H
10000	J
10001	K
10010	L
10011	M
10100	N
10101	P
10110	Q
10111	R
11000	S
11001	T
11010	U
11011	V
11100	W
11101	X
11110	Y
11111	Z

00000
00001-00076

0
1 THROUGH 62

NO STATEMENT.
ASSIGNED AS IDENTIFICATION NUMBERS
FOR C2 IUS (JU, PU, FJU, AND FPU).

			FIELD CODING FOR J9.1I	(SHEET 3)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	010	TRACK NUMBER, OBJECTIVE -----	(CONTINUED)	
		00077	63	ILLEGAL.
		00100-00175	64 THROUGH 125	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		00176	126	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		00177	127	COLLECTIVE ADDRESS.
		00200-07776	128 THROUGH 4094	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		07777	4095	ILLEGAL.
		0A000-0Z777	4096 THROUGH 16383	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		10000-17777	16384 THROUGH 20479	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		20000-27777	32768 THROUGH 36863	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.

			FIELD CODING FOR J9.1I	(SHEET 4)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	010	TRACK NUMBER, OBJECTIVE -----	(CONTINUED)	
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		70000-77776	114688 THROUGH 118782	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
1050	001	METHOD OF FIRE -----		PROVIDES THE PLANNED MOF FOR ENGAGEMENT OF TN OBJECTIVE BY TN SOURCE.
		NO STATEMENT	0	

			FIELD CODING FOR J9.1I	(SHEET 5)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1050	001	METHOD OF FIRE -----	(CONTINUED)	
		SINGLE SHOT	1	TARGET WILL BE ENGAGED WITH ONE SHOT.
		DUAL SHOT	2	TARGET WILL BE ENGAGED WITH TWO SHOTS.
		MULTIPLE SHOT	3	TARGET WILL BE ENGAGED WITH THREE OR MORE SHOTS.
		SHOOT-LOOK-SHOOT	4	TARGET WILL BE ENGAGED WITH ONE SHOT. IF ENGAGEMENT IS EVALUATED AS UNSUCCESSFUL, A SECOND SINGLE SHOT ENGAGEMENT IS INITIATED.
		UNDEFINED	5 THROUGH 7	
1075	001	ENGAGEMENT COORDINATION ACTION VALUE -----		INDICATES THE USE OF THE APPLICABLE MESSAGE.
		INTEND TO ENGAGE	0	TN SOURCE INTENDS TO ENGAGE.
		DO NOT INTEND TO ENGAGE	1	TN SOURCE WILL NOT ENGAGE.
		AVAILABLE FOR SUPPORT	2	TN SOURCE CAN PROVIDE ENGAGEMENT SUPPORT.
		NOT AVAILABLE FOR SUPPORT	3	TN SOURCE CANNOT PROVIDE ENGAGEMENT SUPPORT.
		SUPPORT EXPECTED	4	TN SOURCE WILL ENGAGE THE TRACK NUMBER OBJECTIVE. CALCULATION OF METHOD OF FIRE ASSUMES TN ADDRESSEE SUPPORT.
		SUPPORT NOT EXPECTED	5	TN SOURCE WILL ENGAGE THE TRACK NUMBER OBJECTIVE AND DOES NOT EXPECT TN ADDRESSEE ENGAGEMENT SUPPORT.
		UNDEFINED	6 THROUGH 15	
1001	001	PROBABILITY OF KILL -----		PROBABILITY THE TN OBJECTIVE WILL BE DESTROYED. PROBABILITY OF KILL IS BASED ON TN SOURCE ENGAGEMENT.
		NO STATEMENT	0	
		LESS THAN 50 PERCENT	1	
		50 TO 69 PERCENT	2	
		70 TO 79 PERCENT	3	
		80 TO 84 PERCENT	4	
		85 TO 89 PERCENT	5	
		90 TO 94 PERCENT	6	
		GREATER THAN 94 PERCENT	7	

FIELD CODING FOR J9.1I				(SHEET 6)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1627	001	TRACKING STATUS -----		INDICATES THE TRACKING STATUS.
		NO STATEMENT	0	
		NOT UNDER TRACK	1	TN SOURCE DOES NOT HAVE TN OBJECTIVE UNDER TRACK.
		TN OBJECTIVE UNDER TRACK	2	TN SOURCE IS TRACKING TN OBJECTIVE.
		UNDEFINED	3	
392	008	RECEIPT/COMPLIANCE -----		
		ORIGINAL ORDER	0	RECEIPT/COMPLIANCE RESPONSE REQUIRED.
		ORIGINAL ORDER	1	RECEIPT/COMPLIANCE RESPONSE NOT REQUIRED. MUST BE USED IN CONJUNCTION WITH ORIGINAL ORDER MESSAGES ADDRESSED TO COLLECTIVE ADDRESSES. THE ORIGINAL ORDER SHALL BE TRANSMITTED 3 TIMES. MESSAGE RECEIVED ERROR FREE.
		MACHINE RECEIPT	2	THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER WILL COMPLY. IN THIS USAGE, THE SYSTEM COMPONENT IS A HUMAN OPERATOR OR (UNMANNED VEHICLE ONLY) A MACHINE.
		WILCO (WILL COMPLY)	3	THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER HAS COMPLIED. IN THIS USAGE, THE SYSTEM COMPONENT MAY BE A HUMAN OPERATOR OR A MACHINE.
		HAVCO (HAVE COMPLIED)	4	RECEIPT/COMPLIANCE RESPONSE (MR AND/OR CANTPRO ONLY) REQUIRED.
		ORIGINAL ORDER	5	THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER CANNOT COMPLY. IN THIS USAGE, THE SYSTEM COMPONENT IS A HUMAN OPERATOR OR (UNMANNED VEHICLE ONLY) A MACHINE.
		CANTCO (CANNOT COMPLY)	6	NON-SPECIFIC SYSTEM LIMITATION OR CONFLICT. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	7	TIME SLOT ASSIGNMENT CONFLICT
		CANTPRO (CANNOT PROCESS)	8	

FIELD CODING FOR J9.1I				(SHEET 7)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
		CANTPRO (CANNOT PROCESS)	9	DETECTED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	10	CRYPTOVARIABLE NOT HELD. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	11	PARTICIPATION GROUP NOT DEFINED. THIS IS AN AUTOMATIC COMPUTER- GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	12	APPLICABLE ASSIGNMENT TABLE FULL. THIS IS AN AUTOMATIC COMPUTER- GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	13	RELAY FUNCTION SPECIFIED ALREADY HAS ASSIGNED TIME SLOT BLOCKS FOR WHICH A DIFFERENT RELAY MODE/NET NUMBER HAS BEEN SPECIFIED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
				INTERFERENCE PROTECTION FEATURES WOULD BE VIOLATED BY ACCEPTANCE OF ASSIGNMENT. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.

FIELD CODING FOR J9.1I				(SHEET 8)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
		CANTPRO (CANNOT PROCESS)	14	HOST SUBSCRIBER INTERFACE IS INACTIVE AND MESSAGE IS NOT PROCESSED BY THE TERMINAL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	15	TN, ADDRESSEE DOES NOT IMPLEMENT THE ACTION REQUESTED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	16	ONE OR MORE TNS IN THE OM NOT HELD. THIS IS AN AUTOMATIC COMPUTER- GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	17	TN, REFERENCE OR TN, FRIENDLY WEAPON IS UNDER OWN UNIT CONTROL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	18	UNIT NOT EXERCISING AIR CONTROL CAPABILITY. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	19	UNACCEPTABLE IDENTITY. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	20	ADDRESSEE TN IS INACTIVE. THIS IS

FIELD CODING FOR J9.1I

(SHEET 9)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
		CANTPRO (CANNOT PROCESS)	21	AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	22	THE FORWARDING UNIT DID NOT RECEIVE A MACHINE RECEIPT FROM THE ADDRESSEE TN. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		UNDEFINED NO STATEMENT	23 THROUGH 30 31	TN, REFERENCE OR TN, FRIENDLY WEAPON IS NOT UNDER THIS UNIT'S CONTROL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
444	025	RECURRENCE RATE, RECEIPT/ COMPLIANCE -----		IDENTIFIES THE TIME SLOT IN WHICH THE RECEIPT/COMPLIANCE FOR THE MESSAGE IS TO BE TRANSMITTED.
		NO STATEMENT	0	
		NUMERIC	1 THROUGH 15	THE NUMERIC VALUE FOR RECEIPT/COMPLIANCE, SPECIFIED AS RECURRENCE RATE NUMBER, DEFINES THE NUMBER N OF CONSECUTIVE TIME SLOTS FROM THE ORIGINAL TRANSMISSION TO THE DONATED TIME SLOT: N=3X2 TO THE (15-RRN) POWER.

TABLE J10-1. J10 Weapons Coordination and Management Word Applicability Table

INITIAL WORD	SUBLABEL							
			J10.2I ENGAGEMENT STATUS	J10.3I HANDOVER		J10.5I CONTROLLING UNIT REPORT	J10.6I PAIRING	
EXTENSION WORD - 0				J10.3E0				
CONTINUATION WORD - 0								
1			J10.2C1 ADDITIONAL ENGAGEMENT STATUS	J10.3C1 HANDOVER WORD 1				
2			J10.2C2 ENAGAGEMENT STATUS WORD 2	J10.3C2 HANDOVER WORD 2				
...								
...								
...								
...								
...								
...								
31								

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

J10.2 MESSAGE SUMMARY

PURPOSE

The J10.2 Engagement Status Message provides the status of an engagement between the Reference TN and the Target TN.

DATA ELEMENT SUMMARY

<u>J10.2I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
TRACK NUMBER, REFERENCE	19
TRACK NUMBER, TARGET	19
WEAPON SYSTEM	5
SPARE	1
WEAPON ENGAGEMENT STATUS	4
SPARE	9

<u>J10.2C1</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
CONTINUATION WORD LABEL	5
TRACK NUMBER, TARGET A	19
AIR WEAPON/ENGAGEMENT STATUS, A	4
TRACK NUMBER, TARGET B	19
AIR WEAPON/ENGAGEMENT STATUS, B	4
SPARE	17

<u>J10.2C2</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
CONTINUATION WORD LABEL	5
TRACK NUMBER, FRIENDLY WEAPON	19
TIME FUNCTION, 1	3
SECOND, TENTHS	10
MINUTE	6
SPARE	25

J10.2 TRANSMIT/RECEIVE RULES

TITLE: Engagement Status Message

TRANSMIT RULES

1. The J10.2 Engagement Status message shall be transmitted twice at an RRN = 6 (12 seconds, 8-20 second interval) by the C² JU reporting its own or non IU's engagement status, or the controlling C² JU:

a. Upon initiation or change of engagement status of the Reference TN (JU or nonJU).

b. Upon accepting the handover of an engaged platform. In this case, the controlling unit must initially transmit the same engagement status as the previous controlling unit, since acceptance of an engaged handover constitutes acceptance of the engagement mission (see paragraph 4.11.3.2.2d(4)).

c. When requested by another JU in a J7.1 Data Update Request message.

d. When data contained in the J10.2I Engagement Status initial word or the J10.2C1 Additional Engagement Status continuation word(s) changes before the J10.2 message is transmitted twice, the original J10.2 message shall be terminated and reinitiated with the new data.

2. When used to report multiple engagement status, the J10.2I word shall be followed by one or two J10.2C1 words. Additional initial words and/or initial/continuation words sequences may be transmitted without changing previously reported engagements, so that no limit will exist on the total number of engagements that may be reported for a weapon system.

3. The redundancy of initial transmissions and periodic update rates of the J10.2 message shall be dependent upon the Weapons Engagement Status (WES) values being reported, as shown in Table J10-3 (except as stated in Rule 1 above).

J10.2 TRANSMIT/RECEIVE RULES (Continued)

TRANSMIT RULES (Continued)

4. The WES field set to value 5 is transmitted until sensor contact is cancelled/lost to preclude reengagement and weapons expenditure.

5. When reporting time of predicted intercept, the J10.2I word shall be followed by the J10.2C2 word.

a. The J10.2C2 word shall not be used when reporting multiple engagements using the J10.2C1 Additional Engagement Status word.

b. Regardless of the periodic rate, a J10.2I/J10.2C2 word sequence shall be reported one final time 10 (8-12) seconds prior to time of predicted intercept.

c. When reporting single or multiple weapon commitments against a single target, a single J10.2I/J10.2C2 word sequence shall be used to report the time of predicted intercept of each Friendly Weapon TN committed against the target. However, the engagement status shall reflect the status of the Reference TN, not the status of individual commitments. No limit exists on the total number of Friendly Weapon TN commitments that may be reported for a given Reference TN. The engagement status of the Reference TN shall be the highest priority WES value of the individual commitments determined from the following WES values in order of priority from highest to lowest with one being highest.

(1) Effective (value 5)

(2) Firing (value 4)

(3) Partially Effective (value 6)

(4) Engagement Broken (value 8)

6. When a WES value of 5 or 6 is being reported with a time of actual intercept of the Target TN, a J10.2I/J10.2C2 word sequence shall be

J10.2 TRANSMIT/RECEIVE RULES (Continued)

TRANSMIT RULES (Continued)

transmitted with the Friendly Weapon TN field in the J10.2C2 word set to No Statement.

7. Multiple engagements shall be reported as a contiguous list in a sequence of J10.2I and J10.2C1 words. An Engagement Status shall not be transmitted in a J10.2C1 word unless the preceding J10.2I is reporting a TN, Target and there is at least another Engagement Status to report. An Engagement Status shall not be transmitted in a second J10.2C1 word unless the preceding J10.2C1 word is reporting both TN, target A and TN, target B and there is at least another Engagement Status to report. When an engagement in a multiple engagement report terminates, the subsequent report shall reorder the remaining engagements as illustrated in Table J10-2.

TABLE J10-2. Contiguous Engagement Status Reports

Engagement Status Report word/message sequence		TN, Target	Reported Status
J10.2I		4001	Engagement Broken
J10.2C1	Target A	3072	Engaged
	Target B	4003	Engaged
J10.2C1	Target A	4155	Engaged
	Target B	3070	Engaged
J10.2I		4166	Engaged

Subsequent Engagement Status Report word sequence		TN, Target	Reported Status
J10.2I		3072	Engaged
J10.2C1	Target A	4003	Engaged
	Target B	4155	Engaged
J10.2C1	Target A	3070	Engaged
	Target B	4166	Engaged
Not required			

RECEIVE RULES

When WES values 5 and 8 are received, Weapon System shall not be processed.

TABLE J10-3. Initial Transmissions and Update Rates for Engagement Status Messages for
Weapon Engagement Status

WEAPON/ENGAGEMENT STATUS VALUE	INITIAL NUMBER OF TRANSMISSIONS	PERIODIC UPDATE RATE
0 - NO STATEMENT	-----	-----
1 - RECOMMEND REATTACK	2	NO UPDATE
2 - WEAPON ASSIGNED	2	RRN = 4 (48 SECONDS, 36-60 SECOND INTERVAL)
3 - TRACKING/LOCKED ON/ READY TO FIRE/BIRD AFFIRM	2	RRN = 4 (48 SECONDS, 36-60 SECOND INTERVAL)
4 - FIRING/MISSILE IN FLIGHT/ENGAGING TO DESTROY	2	RRN = 4 (48 SECONDS, 36-60 SECOND INTERVAL)
5 - EFFECTIVE/TARGET DESTROYED/GRAND SLAM	2	RRN = 4 (48 SECONDS, 36-60 SECOND INTERVAL)
6 - PARTIALLY EFFECTIVE	2	RRN = 4 (48 SECONDS, 36-60 SECOND INTERVAL)
7 - NOT EFFECTIVE	2	RRN = 4 (48 SECONDS, 36-60 SECOND INTERVAL)
8 - ENGAGEMENT BROKEN	2	NO UPDATE
9 - HEADS UP	2	NO UPDATE
10 - ENGAGEMENT INTERRUPTED	NA	NA
11 - INVESTIGATING/INTERROGATING	2	RRN = 4 (48 SECONDS, 36-60 SECOND INTERVAL)
12 - SHADOWING	2	RRN = 4 (48 SECONDS, 36-60 SECOND INTERVAL)
13 - INTERVENING	2	RRN = 4 (48 SECONDS, 36-60 SECOND INTERVAL)
14 - COVERING	2	RRN = 4 (48 SECONDS, 36-60 SECOND INTERVAL)
15 - BATTLE DAMAGE ASSESSMENT UNKNOWN	2	NO UPDATE

WORD MAP

WORD NUMBER: J10.2I

WORD TITLE: ENGAGEMENT STATUS INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00	:							
TRACK NUMBER, REFERENCE												:	MESSAGE	:	SUBLABEL,	:	WORD						:									
												:	LENGTH	:	J-SERIES	:	LABEL, J-SERIES						:	FORMAT	:							
												:	INDICATOR	:																		:
19												:	3	:	3	:	5						:	2	:							
49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25	:							
TRACK NUMBER, TARGET																		:								:	---		:			
																		:								:			:			
19																		:								:			:			
					:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50	:						
					:	SPARE										:	WEAPON				:	:	WEAPON SYSTEM				:	---		:		
					:											:	ENGAGEMENT				:	SP	:					:			:	
					:											:	STATUS				:	:					:			:		
					:	9										:	4				:	1	:	5				:			:	

WORD DESCRIPTION

WORD NUMBER: J10.2I

WORD TITLE: ENGAGEMENT STATUS INITIAL WORD

REFERENCE			BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS		RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1	2	00
270 004	LABEL, J-SERIES	2-	6	5	01010
271 005	SUBLABEL, J-SERIES	7-	9	3	010
800 001	MESSAGE LENGTH INDICATOR	10-	12	3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
769 002	TRACK NUMBER, REFERENCE	13-	31	19	
769 005	TRACK NUMBER, TARGET	32-	50	19	
700 002	WEAPON SYSTEM	51-	55	5	
756 001	SPARE (SP)	56		1	
394 009	WEAPON ENGAGEMENT STATUS	57-	60	4	
756 009	SPARE	61-	69	9	

FIELD CODING FOR J10.2I (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----		A REFERENCE NUMBER USED TO ASSOCIATE INFORMATION AND DIRECTIVES WITH THE TRACK. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE-BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANNN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6
00111	7
01000	A
01001	B
01010	C
01011	D
01100	E
01101	F
01110	G
01111	H

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
				10000 J
				10001 K
				10010 L
				10011 M
				10100 N
				10101 P
				10110 Q
				10111 R
				11000 S
				11001 T
				11010 U
				11011 V
				11100 W
				11101 X
				11110 Y
				11111 Z
		00000	0	NO STATEMENT.
		00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU). ILLEGAL.
		00077	63	
		00100-00175	64 THROUGH 125	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU). RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		00176	126	COLLECTIVE ADDRESS.
		00177	127	
		00200-07776	128 THROUGH 4094	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		07777	4095	ILLEGAL.
		0A000-0Z777	4096 THROUGH 16383	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		10000-17777	16384 THROUGH 20479	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND

FIELD CODING FOR J10.2I

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		20000-27777	32768 THROUGH 36863	REFERENCE POINTS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		70000-77776	114688 THROUGH 118782	USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		7A000-ZZ777	118784 THROUGH 524287	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
				ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
769	005	TRACK NUMBER, TARGET -----		THE TN OF THE TARGET OF A FRIENDLY WEAPON SYSTEM.
				THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE-BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANNN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.
				CODING CHARACTER

FIELD CODING FOR J10.2I (SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	005	TRACK NUMBER, TARGET -----	(CONTINUED)	
				00000 0
				00001 1
				00010 2
				00011 3
				00100 4
				00101 5
				00110 6
				00111 7
				01000 A
				01001 B
				01010 C
				01011 D
				01100 E
				01101 F
				01110 G
				01111 H
				10000 J
				10001 K
				10010 L
				10011 M
				10100 N
				10101 P
				10110 Q
				10111 R
				11000 S
				11001 T
				11010 U
				11011 V
				11100 W
				11101 X
				11110 Y
				11111 Z
		00000	0	NO STATEMENT.
		00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		00077	63	ILLEGAL.
		00100-00175	64 THROUGH 125	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		00176	126	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		00177	127	COLLECTIVE ADDRESS.
		00200-07776	128 THROUGH 4094	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO

FIELD CODING FOR J10.2I

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	005	TRACK NUMBER, TARGET -----	(CONTINUED)	
		07777	4095	C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS. ILLEGAL.
		0A000-0Z777	4096 THROUGH 16383	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		10000-17777	16384 THROUGH 20479	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		20000-27777	32768 THROUGH 36863	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND

5.2-349

MIL-STD-6016B

FIELD CODING FOR J10.2I

(SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	005	TRACK NUMBER, TARGET -----	(CONTINUED)	
		50000-57777	81920 THROUGH 86015	REFERENCE POINTS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		70000-77776	114688 THROUGH 118782	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
700	002	WEAPON SYSTEM -----		
		NO STATEMENT	0	
		SURFACE-TO-AIR MISSILE (SAM)	1	
		SURFACE-TO-SURFACE MISSILE (SSM)	2	
		AIRCRAFT	3	
		CONVENTIONAL (SHORT RANGE MISSILE OR GUNS)	4	
		ANTISUBMARINE WARFARE HELICOPTER	5	

5.2-350

MIL-STD-6016B

FIELD CODING FOR J10.2I

(SHEET 8)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
700	002	WEAPON SYSTEM -----	(CONTINUED)	
		ANTISUBMARINE WARFARE	6	
		MISSILE		
		DEPTH CHARGE/DEPTH BOMB	7	
		TORPEDO	8	
		FIXED WING ANTISUBMARINE	9	
		WARFARE AIRCRAFT		
		LASER	10	
		BEAM WEAPON	11	
		INFRARED DECOY	12	
		CHAFF	13	
		SPOT JAMMER	14	
		BARRAGE JAMMER	15	
		DECEPTION JAMMER	16	
		INTERCEPTOR	17	
		AIR-TO-SURFACE MISSILE	18	
		(ASM)		
		UNDEFINED	19 THROUGH 31	
394	009	WEAPON ENGAGEMENT STATUS -----		PROVIDES THE ENGAGEMENT STATUS OF A WEAPON AGAINST AN OBJECTIVE.
		NO STATEMENT	0	
		RECOMMEND REATTACK	1	THE REFERENCE TN HAS COMPLETED ITS MISSION AGAINST THE TARGET AND RECOMMENDS ANOTHER ASO MISSION BE CONDUCTED AGAINST THE SAME TARGET.
		WEAPON ASSIGNED	2	THE SPECIFIED WEAPON REPORTED IN THE WEAPON SYSTEM FIELD HAS BEEN ALLOCATED TO THE TARGET.
		TRACKING/LOCKED ON/READY TO FIRE/BIRD AFFIRM	3	THE REFERENCE TN'S TRACKING RADAR IS LOCKED ON TO THE TARGET. UNIT IS READY TO FIRE AS SOON AS THE TARGET IS WITHIN WEAPON RANGE AND THE TARGET IS ELIGIBLE FOR DESTRUCTION.
		FIRING/MISSILE IN FLIGHT/ENGAGING TO DESTROY	4	(A.) MISSILE: IF THE WEAPON SYSTEM IS ANY MISSILE, THE REFERENCE TN'S MISSILE HAS BEEN LAUNCHED AND IS ENROUTE TO THE TARGET. (B.) AIRCRAFT: IF WEAPON SYSTEM IS ANY AIRCRAFT, THE REFERENCE TN IS ENGAGING THE TARGET WITH INTENTION TO DESTROY.

5.2-351

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
394	009	WEAPON ENGAGEMENT STATUS	(CONTINUED)	

		EFFECTIVE/TARGET DESTROYED/GRAND SLAM	5	THE TARGET HAS BEEN ENGAGED BY THE REFERENCE TN AND IS NO LONGER A THREAT. THE ENGAGEMENT PREVIOUSLY REPORTED IS BROKEN. THIS VALUE IS TRANSMITTED UNTIL SENSOR CONTACT IS CANCELLED/LOST.
		PARTIALLY EFFECTIVE	6	ALL TARGETS ASSOCIATED WITH THE TARGET TN HAVE NOT BEEN DESTROYED. THE ENGAGEMENT IS CONTINUING.
		NOT EFFECTIVE	7	MISS OR ABORT. THE TARGET IS NOT DESTROYED. THE ENGAGEMENT IS CONTINUING.
		ENGAGEMENT BROKEN	8	THE REFERENCE TN IS TERMINATING THE ACTION PREVIOUSLY REPORTED OR ORDERED AGAINST THE TARGET.
		HEADS UP	9	THE TARGET CONSTITUTES A THREAT TO FRIENDLY FORCES. THE SOURCE TN IS UNABLE TO ASSURE COMPLETE DESTRUCTION OF THE TARGET. THE REFERENCE TN WILL BE SET TO THE TN OF THE SOURCE OR ONE OF ITS SUPPORTING UNITS. THIS VALUE DOES NOT REPORT EITHER AN ENGAGEMENT OR A BREAKING OF AN ENGAGEMENT. THE WEAPON SYSTEM FIELD IS SET TO NO STATEMENT FOR THIS VALUE.
		ENGAGEMENT INTERRUPTED	10	THIS VALUE IS DEFINED AS A NATO NATION NATIONAL REQUIREMENT. U.S. SYSTEMS WILL NOT ORIGINATE THIS STATUS VALUE, AND WHEN RECEIVING THE VALUE, U.S. SYSTEMS WILL INTERPRET AS ENGAGEMENT BROKEN (VALUE 8).
		INVESTIGATING/INTERROGATING	11	THE REFERENCE TN IS NOT YET TRACKING THE TARGET. IF THE WEAPON SYSTEM IS AIRCRAFT, THE TARGET IS BEING INVESTIGATED BY THE AIRCRAFT WHOSE TN IS SPECIFIED BY THE REFERENCE TN. THE AIRCRAFT WILL NOT FIRE ON THE TARGET UNTIL ORDERED OR THE TARGET BECOMES ELIGIBLE FOR DESTRUCTION UNDER EXISTING DOCTRINE AND/OR RULES OF ENGAGEMENT.

5.2-352

MIL-STD-6016B

FIELD CODING FOR J10.2I (SHEET 10)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
394	009	WEAPON ENGAGEMENT STATUS	(CONTINUED)	

		SHADOWING	12	THE REFERENCE TN IS MAINTAINING SURVEILLANCE ON A DESIGNATED TARGET.
		INTERVENING	13	THE REFERENCE TN IS TAKING ACTION TO DIVERT A DESIGNATED TARGET FROM ITS INTENDED FLIGHT PATH.
		COVERING	14	THE REFERENCE TN IS MAINTAINING A POSITION RELATIVE TO A DESIGNATED TARGET FROM WHICH A SUCCESSFUL INTERCEPT CAN TAKE EFFECT IF NEEDED.
		BATTLE DAMAGE ASSESSMENT	15	THE REFERENCE TN HAS COMPLETED ITS MISSION AGAINST THE TARGET AND REPORTS AN UNKNOWN BATTLE DAMAGE ASSESSMENT.
		UNKNOWN		

WORD TITLE: ADDITIONAL ENGAGEMENT STATUS CONTINUATION WORD

49:	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30:	29	28	27	26:	25						
																				:					:					:
<---	:	TRACK NUMBER, TARGET B																		:	AIR WEAPON/				:					
:	:																			:	ENGAGEMENT				----					
:	:																			:	STATUS, A				:					
																				:					:					:
:																			:					:						
										19										:					:					
																				:	4				:					

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53:	52	51	50
:																		:	AIR WEAPON/	
:																		:	ENGAGEMENT	
:																		:	STATUS, B	
:																		:	4	

WORD DESCRIPTION

WORD NUMBER: J10.2C1

WORD TITLE: ADDITIONAL ENGAGEMENT STATUS CONTINUATION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550 001		WORD FORMAT	0-	1 2	01
1551 001		CONTINUATION WORD LABEL	2-	6 5	00001
769 025		TRACK NUMBER, TARGET A	7-	25 19	
394 007		AIR WEAPON/ENGAGEMENT STATUS, A	26-	29 4	
769 026		TRACK NUMBER, TARGET B	30-	48 19	SAME CODING AS FOR BITS 7-25.
394 005		AIR WEAPON/ENGAGEMENT STATUS, B	49-	52 4	SAME CODING AS FOR BITS 26-29.
756 017		SPARE	53-	69 17	

FIELD CODING FOR J10.2C1 (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	025	TRACK NUMBER, TARGET A -----		THE TN OF ONE OF A NUMBER OF TARGETS THAT ARE ASSIGNED TO THE REFERENCE TN. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE-BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANNN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6
00111	7
01000	A
01001	B
01010	C
01011	D
01100	E
01101	F
01110	G
01111	H

FIELD CODING FOR J10.2C1 (SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	025	TRACK NUMBER, TARGET A -----	(CONTINUED)	
				10000 J
				10001 K
				10010 L
				10011 M
				10100 N
				10101 P
				10110 Q
				10111 R
				11000 S
				11001 T
				11010 U
				11011 V
				11100 W
				11101 X
				11110 Y
				11111 Z
		00000	0	NO STATEMENT.
		00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU). ILLEGAL.
		00077	63	
		00100-00175	64 THROUGH 125	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU). RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		00176	126	COLLECTIVE ADDRESS.
		00177	127	
		00200-07776	128 THROUGH 4094	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		07777	4095	ILLEGAL.
		0A000-0Z777	4096 THROUGH 16383	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		10000-17777	16384 THROUGH 20479	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND

FIELD CODING FOR J10.2C1

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	025	TRACK NUMBER, TARGET A -----	(CONTINUED)	
		20000-27777	32768 THROUGH 36863	REFERENCE POINTS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE

5.2-358

MIL-STD-6016B

FIELD CODING FOR J10.2C1

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	025	TRACK NUMBER, TARGET A -----	(CONTINUED)	
		70000-77776	114688 THROUGH 118782	USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
394	007	AIR WEAPON/ENGAGEMENT STATUS, A -----		PROVIDES THE ENGAGEMENT STATUS OF A PARTICULAR AIR COMBAT WEAPON AGAINST AN OBJECTIVE.
		NO STATEMENT	0	
		RECOMMEND REATTACK	1	THE REFERENCE TN HAS COMPLETED ITS MISSION AGAINST THE TARGET AND RECOMMENDS ANOTHER ASO MISSION BE CONDUCTED AGAINST THE SAME TARGET. THE SPECIFIED WEAPON REPORTED IN THE WEAPON SYSTEM FIELD HAS BEEN ALLOCATED TO THE TARGET.
		WEAPON ASSIGNED	2	THE REFERENCE TN'S TRACKING RADAR IS LOCKED ON TO THE TARGET. UNIT IS READY TO FIRE AS SOON AS THE TARGET IS WITHIN WEAPON RANGE AND THE TARGET IS ELIGIBLE FOR DESTRUCTION.
		TRACKING/LOCKED ON/READY TO FIRE/BIRD AFFIRM	3	(A.) MISSILE: IF THE WEAPON SYSTEM IS ANY MISSILE, THE REFERENCE TN'S MISSILE HAS BEEN LAUNCHED AND IS ENROUTE TO THE TARGET. (B.) AIRCRAFT: IF WEAPON SYSTEM IS ANY AIRCRAFT, THE REFERENCE TN IS ENGAGING THE TARGET WITH INTENTION TO DESTROY.
		FIRING/MISSILE IN FLIGHT/ENGAGING TO DESTROY	4	THE TARGET HAS BEEN ENGAGED BY THE REFERENCE TN AND IS NO LONGER A THREAT. THE ENGAGEMENT PREVIOUSLY
		EFFECTIVE/TARGET DESTROYED/GRAND SLAM	5	

5.2-359

MIL-STD-6016B

FIELD CODING FOR J10.2C1

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
394	007	AIR WEAPON/ENGAGEMENT STATUS, A -----	(CONTINUED)	
		PARTIALLY EFFECTIVE	6	REPORTED IS BROKEN. THIS VALUE IS TRANSMITTED UNTIL SENSOR CONTACT IS CANCELLED/LOST.
		NOT EFFECTIVE	7	ALL TARGETS ASSOCIATED WITH THE TARGET TN HAVE NOT BEEN DESTROYED. THE ENGAGEMENT IS CONTINUING.
		ENGAGEMENT BROKEN	8	MISS OR ABORT. THE TARGET IS NOT DESTROYED. THE ENGAGEMENT IS CONTINUING.
		HEADS UP	9	THE REFERENCE TN IS TERMINATING THE ACTION PREVIOUSLY REPORTED OR ORDERED AGAINST THE TARGET.
		ENGAGEMENT INTERRUPTED	10	THE TARGET CONSTITUTES A THREAT TO FRIENDLY FORCES. THE SOURCE TN IS UNABLE TO ASSURE COMPLETE DESTRUCTION OF THE TARGET. THE REFERENCE TN WILL BE SET TO THE TN OF THE SOURCE OR ONE OF ITS SUPPORTING UNITS. THIS VALUE DOES NOT REPORT EITHER AN ENGAGEMENT OR A BREAKING OF AN ENGAGEMENT. THE WEAPON SYSTEM FIELD IS SET TO NO STATEMENT FOR THIS VALUE.
		INVESTIGATING/ INTERROGATING	11	THIS VALUE IS DEFINED AS A NATO NATION NATIONAL REQUIREMENT. U.S. SYSTEMS WILL NOT ORIGINATE THIS STATUS VALUE, AND WHEN RECEIVING THE VALUE, U.S. SYSTEMS WILL INTERPRET AS ENGAGEMENT BROKEN (VALUE 8).
		SHADOWING	12	THE REFERENCE TN IS NOT YET TRACKING THE TARGET. IF THE WEAPON SYSTEM IS AIRCRAFT, THE TARGET IS BEING INVESTIGATED BY THE AIRCRAFT WHOSE TN IS SPECIFIED BY THE REFERENCE TN. THE AIRCRAFT WILL NOT FIRE ON THE TARGET UNTIL ORDERED OR THE TARGET BECOMES ELIGIBLE FOR DESTRUCTION UNDER EXISTING DOCTRINE AND/OR RULES OF ENGAGEMENT.
				THE REFERENCE TN IS MAINTAINING SURVEILLANCE ON A DESIGNATED

5.2-360

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
394	007	AIR WEAPON/ENGAGEMENT STATUS, A -----	(CONTINUED)	
		INTERVENING	13	TARGET. THE REFERENCE TN IS TAKING ACTION TO DIVERT A DESIGNATED TARGET FROM ITS INTENDED FLIGHT PATH.
		COVERING	14	THE REFERENCE TN IS MAINTAINING A POSITION RELATIVE TO A DESIGNATED TARGET FROM WHICH A SUCCESSFUL INTERCEPT CAN TAKE EFFECT IF NEEDED.
		BATTLE DAMAGE ASSESSMENT UNKNOWN	15	THE REFERENCE TN HAS COMPLETED ITS MISSION AGAINST THE TARGET AND REPORTS AN UNKNOWN BATTLE DAMAGE ASSESSMENT.

WORD MAP

WORD NUMBER: J10.2C2

WORD TITLE: ENGAGEMENT STATUS CONTINUATION WORD 2

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00	:	
TRACK NUMBER, FRIENDLY WEAPON																		:	CONTINUATION WORD				:	WORD		:
																		:	LABEL				:	FORMAT		:
																		:					:			:
19																		:	5				:	2		:
49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25	:	
<---					:	MINUTE					:	SECOND, TENTHS										:	TIME		:	
					:						:											:	FUNCTION, 1		:	
					:	6					:	10										:	3		:	
					:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50	:
					:																					:
					:	SPARE																				:
					:																					:
					:	25																				:

WORD DESCRIPTION

WORD NUMBER: J10.2C2

WORD TITLE: ENGAGEMENT STATUS CONTINUATION WORD 2

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	00010
769 004	TRACK NUMBER, FRIENDLY WEAPON	7-	25 19	
1681 005	TIME FUNCTION, 1	26-	28 3	
380 007	SECOND, TENTHS	29-	38 10	
797 004	MINUTE	39-	44 6	
756 025	SPARE	45-	69 25	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	004	TRACK NUMBER, FRIENDLY WEAPON -----		THE TN OF THE FRIENDLY WEAPON. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE- BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANNN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6
00111	7
01000	A
01001	B
01010	C
01011	D
01100	E
01101	F
01110	G
01111	H
10000	J

FIELD CODING FOR J10.2C2

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	004	TRACK NUMBER, FRIENDLY WEAPON -----	(CONTINUED)	
				10001 K
				10010 L
				10011 M
				10100 N
				10101 P
				10110 Q
				10111 R
				11000 S
				11001 T
				11010 U
				11011 V
				11100 W
				11101 X
				11110 Y
				11111 Z
		00000	0	NO STATEMENT.
		00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		00077	63	ILLEGAL.
		00100-00175	64 THROUGH 125	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		00176	126	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		00177	127	COLLECTIVE ADDRESS.
		00200-07776	128 THROUGH 4094	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		07777	4095	ILLEGAL.
		0A000-0Z777	4096 THROUGH 16383	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		10000-17777	16384 THROUGH 20479	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.

5.2-365

MIL-STD-6016B

FIELD CODING FOR J10.2C2

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	004	TRACK NUMBER, FRIENDLY WEAPON -----	(CONTINUED)	
		20000-27777	32768 THROUGH 36863	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION

5.2-366

MIL-STD-6016B

FIELD CODING FOR J10.2C2

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	004	TRACK NUMBER, FRIENDLY WEAPON -----	(CONTINUED)	
		70000-77776	114688 THROUGH 118782	REPORTING, E.G., TRACKS AND REFERENCE POINTS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
1681	005	TIME FUNCTION, 1 -----		USED IN CONJUNCTION WITH THE SECOND, TENTHS AND MINUTE FIELDS TO DESCRIBE THEIR USE.
		NO STATEMENT	0	
		TIME OF PREDICTED INTERCEPT	1	TIME THE PREDICTED INTERCEPT WILL OCCUR REFERENCED TO NETWORK TIME (GMT).
		TIME OF ACTUAL INTERCEPT	2	ACTUAL TIME THE INTERCEPT OCCURED REFERENCED TO NETWORK TIME (GMT).
		UNDEFINED	3 THROUGH 7	
380	007	SECOND, TENTHS -----		EXPRESSES THE SECOND OF THE MINUTE IN ONE TENTH SECONDS.
		0 THROUGH 59.9	0 THROUGH 599	IN ONE TENTH SECOND INCREMENTS.
		ILLEGAL	600 THROUGH 1022	
		NO STATEMENT	1023	
797	004	MINUTE -----		THE MINUTE OF THE HOUR.
		0 THROUGH 59	0 THROUGH 59	IN ONE MINUTE INCREMENTS.
		ILLEGAL	60 THROUGH 62	
		NO STATEMENT	63	

5.2-367

MIL-STD-6016B

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

J10.3 MESSAGE SUMMARY

PURPOSE

The J10.3 Handover Message is used to transfer control of aircraft and Remotely Piloted Vehicles/Missiles between controlling units.

DATA ELEMENT SUMMARY

<u>J10.3I</u>		<u>J10.3C2 (Continued)</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	DISUSED	8
LABEL, J-SERIES	5	DISUSED	8
SUBLABEL, J-SERIES	3	DISUSED	8
MESSAGE LENGTH INDICATOR	3	DISUSED	8
TRACK NUMBER, ADDRESSEE	15	DISUSED	8
SPARE	9	SPARE	7
TRACK NUMBER, REFERENCE	19		
SPARE	1		
REQUEST FOR ASSUME CONTROL	3		
CANCELLATION INDICATOR	1		
RECEIPT/COMPLIANCE	5		
RECURRENCE RATE, RECEIPT/ COMPLIANCE	4		

<u>J10.3E0</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
TRACK NUMBER, OBJECTIVE	19
SPARE	6
LINK 4A ADDRESS	13
SPARE	6
VOICE CALL SIGN	24

<u>J10.3C1</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
CONTINUATION WORD LABEL	5
CONTROL CHANNEL	7
VOICE FREQUENCY/CHANNEL INDICATOR	1
VOICE FREQUENCY/CHANNEL	13
LINK 4A FREQUENCY	13
MODE III CODE, 1	12
SQUAWK FLASH INDICATOR	1
RADIO TYPE	3
SECURE RADIO INDICATOR	1
SPARE	12

<u>J10.3C2</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
CONTINUATION WORD LABEL	5
MISSION CORRELATOR	8
DISUSED	8

MIL-STD-6016B

J10.3 TRANSMIT/RECEIVE RULES

TITLE: Handover Message

TRANSMIT RULES

1. The J10.3 Handover message shall be transmitted initially only by operator action.
2. When transmitting an original J10.3 message with the Request for Assume Control field set to Handover Request or the Request Cancellation field set to value 1, the R/C field shall be set to 0, i.e., R/C required. The J10.3 message shall not be transmitted with the R/C field set to 1, i.e., R/C not required.
3. An original J10.3 message (R/C = 0) requires transmission of a J10.3I/J10.3E0 word sequence. The J10.3C1 word is only transmitted in an original message when the Request for Assume Control field is set to value 2 except for transmit rule 6 below concerning remotely piloted vehicles. The J10.3 message transmitted with the R/C field set to Cannot Comply (CANTCO) or Cannot Process (CANTPRO) will respond with a word sequence identical to that to which the response is being made.
4. A J10.3 message transmitted with the R/C field set to Will Comply (WILCO) requires transmission of a J10.3I/J10.3E0/J10.3C1 word sequence, except in response to a J10.3 message with the Request for Assume Control field set to value 0 or 1 and the Cancellation Indicator field set to value 1.
5. Transmission of the J10.3 message with the various R/C values set shall be in accordance with the procedures specified in paragraph 4.1.7.
6. The transmit/receive rules for the handover of remotely piloted vehicles are TBD.

RECEIVE RULES

There are no receive rules specified for this message.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J10.3I
WORD TITLE: HANDOVER INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00	:							
TRACK NUMBER, ADDRESSEE												:	MESSAGE	:	SUBLABEL,	:							:	WORD	:							
												:	LENGTH	:	J-SERIES	:	LABEL, J-SERIES						:	FORMAT	:							
												:	INDICATOR	:							:		:		:							
15												:	3	:	3	:	5						:	2	:							
49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25	:							
TRACK NUMBER, REFERENCE												:	SPARE												:	---						
												:													:							
19												:	9												:							
					:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50	:						
					:	RECURRENCE					:						:	REQUEST FOR:					:									
					:	RATE, RECEIPT/					:	RECEIPT/COMPLIANCE					:	CI	:	ASSUME					:	SP	:	---				
					:	COMPLIANCE					:						:	CONTROL					:									
					:	4					:	5					:	1	:	3					:	1	:					

WORD DESCRIPTION

WORD NUMBER: J10.3I
WORD TITLE: HANDOVER INITIAL WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	00
270 004	LABEL, J-SERIES	2-	6 5	01010
271 005	SUBLABEL, J-SERIES	7-	9 3	011
800 001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
769 006	TRACK NUMBER, ADDRESSEE	13-	27 15	
756 009	SPARE	28-	36 9	
769 002	TRACK NUMBER, REFERENCE	37-	55 19	
756 001	SPARE (SP)	56	1	
389 002	REQUEST FOR ASSUME CONTROL	57-	59 3	
390 003	CANCELLATION INDICATOR (CI)	60	1	
392 008	RECEIPT/COMPLIANCE	61-	65 5	
444 025	RECURRENCE RATE, RECEIPT/ COMPLIANCE (RRN R/C)	66-	69 4	

FIELD CODING FOR J10.3I

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	006	TRACK NUMBER, ADDRESSEE -----		THE TN OF A UNIT (I.E., JU OR PU) TO WHICH A MESSAGE IS ADDRESSED.
		NO STATEMENT NUMERIC	0 00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		ILLEGAL NUMERIC	00077 (OCTAL) 00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC NUMERIC	00177 (OCTAL) 00200 THROUGH 07776 (OCTAL)	COLLECTIVE ADDRESS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL NUMERIC	07777 (OCTAL) 10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
769	002	TRACK NUMBER, REFERENCE -----		A REFERENCE NUMBER USED TO ASSOCIATE INFORMATION AND DIRECTIVES WITH THE TRACK. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE- BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS.

FIELD CODING FOR J10.3I (SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	

CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6
00111	7
01000	A
01001	B
01010	C
01011	D
01100	E
01101	F
01110	G
01111	H
10000	J
10001	K
10010	L
10011	M
10100	N
10101	P
10110	Q
10111	R
11000	S
11001	T
11010	U
11011	V
11100	W
11101	X
11110	Y
11111	Z

00000	0	NO STATEMENT.
00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS

FIELD CODING FOR J10.3I

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		00077	63	FOR C2 IUS (JU, PU, FJU, AND FPU). ILLEGAL.
		00100-00175	64 THROUGH 125	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		00176	126	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		00177	127	COLLECTIVE ADDRESS.
		00200-07776	128 THROUGH 4094	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		07777	4095	ILLEGAL.
		0A000-0Z777	4096 THROUGH 16383	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		10000-17777	16384 THROUGH 20479	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		20000-27777	32768 THROUGH 36863	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND

FIELD CODING FOR J10.3I

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		40000-47777	65536 THROUGH 69631	REFERENCE POINTS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		70000-77776	114688 THROUGH 118782	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
389	002	REQUEST FOR ASSUME CONTROL ----- HANDOVER REQUEST	0	REQUEST ADDRESSEE TN ASSUME CONTROL

5.2-377

MIL-STD-6016B

FIELD CODING FOR J10.3I

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
389	002	REQUEST FOR ASSUME CONTROL -----	(CONTINUED)	
		HANDOVER REQUEST	1	OF THE REFERENCE TN AIRCRAFT. IF THE OBJECTIVE TN IS NOT ZERO, THE REFERENCE TN IS PAIRED TO IT. REQUEST ADDRESSEE TN ASSUME CONTROL OF THE REFERENCE TN AIRCRAFT. THE REFERENCE TN AIRCRAFT IS INVESTIGATING, ENGAGED TO, SHADOWING, INTERVENING, OR COVERING THE OBJECTIVE TN.
		REQUEST FOR TRANSFER OF CONTROL	2	SOURCE TN REQUESTS TRANSFER OF CONTROL OF THE REFERENCE TN TO THE SOURCE TN.
		UNDEFINED	3 THROUGH 7	
390	003	CANCELLATION INDICATOR -----		A HANDOVER REQUEST CAN BE CANCELLED BY SETTING THIS BIT.
		NO STATEMENT	0	
		CANCEL HANDOVER REQUEST	1	
392	008	RECEIPT/COMPLIANCE -----		
		ORIGINAL ORDER	0	RECEIPT/COMPLIANCE RESPONSE REQUIRED.
		ORIGINAL ORDER	1	RECEIPT/COMPLIANCE RESPONSE NOT REQUIRED. MUST BE USED IN CONJUNCTION WITH ORIGINAL ORDER MESSAGES ADDRESSED TO COLLECTIVE ADDRESSES. THE ORIGINAL ORDER SHALL BE TRANSMITTED 3 TIMES. MESSAGE RECEIVED ERROR FREE.
		MACHINE RECEIPT	2	THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER WILL COMPLY. IN THIS USAGE, THE SYSTEM COMPONENT IS A HUMAN OPERATOR OR (UNMANNED VEHICLE ONLY) A MACHINE.
		WILCO (WILL COMPLY)	3	THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER HAS COMPLIED. IN THIS USAGE, THE SYSTEM COMPONENT MAY BE A HUMAN OPERATOR OR A MACHINE.
		HAVCO (HAVE COMPLIED)	4	RECEIPT/COMPLIANCE RESPONSE (MR AND/OR CANTPRO ONLY) REQUIRED.
		ORIGINAL ORDER	5	THE SYSTEM COMPONENT REQUIRED TO
		CANTCO (CANNOT COMPLY)	6	

5.2-378

MIL-STD-6016B

FIELD CODING FOR J10.3I

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
		CANTPRO (CANNOT PROCESS)	7	TAKE ACTION UNDER THIS ORDER CANNOT COMPLY. IN THIS USAGE, THE SYSTEM COMPONENT IS A HUMAN OPERATOR OR (UNMANNED VEHICLE ONLY) A MACHINE.
		CANTPRO (CANNOT PROCESS)	8	NON-SPECIFIC SYSTEM LIMITATION OR CONFLICT. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	9	TIME SLOT ASSIGNMENT CONFLICT DETECTED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	10	CRYPTOVARIABLE NOT HELD. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	11	PARTICIPATION GROUP NOT DEFINED. THIS IS AN AUTOMATIC COMPUTER- GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	12	APPLICABLE ASSIGNMENT TABLE FULL. THIS IS AN AUTOMATIC COMPUTER- GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
				RELAY FUNCTION SPECIFIED ALREADY HAS ASSIGNED TIME SLOT BLOCKS FOR WHICH A DIFFERENT RELAY MODE/NET NUMBER HAS BEEN SPECIFIED. THIS

FIELD CODING FOR J10.3I

(SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

392	008	RECEIPT/COMPLIANCE	(CONTINUED)	
-----	-----	--------------------	-------------	--

CANTPRO (CANNOT PROCESS) 13

CANTPRO (CANNOT PROCESS) 14

CANTPRO (CANNOT PROCESS) 15

CANTPRO (CANNOT PROCESS) 16

CANTPRO (CANNOT PROCESS) 17

CANTPRO (CANNOT PROCESS) 18

IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.

INTERFERENCE PROTECTION FEATURES WOULD BE VIOLATED BY ACCEPTANCE OF ASSIGNMENT. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.

HOST SUBSCRIBER INTERFACE IS INACTIVE AND MESSAGE IS NOT PROCESSED BY THE TERMINAL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.

TN, ADDRESSEE DOES NOT IMPLEMENT THE ACTION REQUESTED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.

ONE OR MORE TNS IN THE OM NOT HELD. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.

TN, REFERENCE OR TN, FRIENDLY WEAPON IS UNDER OWN UNIT CONTROL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.

UNIT NOT EXERCISING AIR CONTROL

5.2-380

MIL-STD-6016B

FIELD CODING FOR J10.3I

(SHEET 8)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
		CANTPRO (CANNOT PROCESS)	19	CAPABILITY. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	20	UNACCEPTABLE IDENTITY. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	21	ADDRESSEE TN IS INACTIVE. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	22	THE FORWARDING UNIT DID NOT RECEIVE A MACHINE RECEIPT FROM THE ADDRESSEE TN. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		UNDEFINED NO STATEMENT	23 THROUGH 30 31	TN, REFERENCE OR TN, FRIENDLY WEAPON IS NOT UNDER THIS UNIT'S CONTROL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
444	025	RECURRENCE RATE, RECEIPT/ COMPLIANCE -----		IDENTIFIES THE TIME SLOT IN WHICH THE RECEIPT/COMPLIANCE FOR THE MESSAGE IS TO BE TRANSMITTED.
		NO STATEMENT	0	
		NUMERIC	1 THROUGH 15	THE NUMERIC VALUE FOR RECEIPT/ COMPLIANCE, SPECIFIED AS

5.2-381

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

444	025	RECURRENCE RATE, RECEIPT/ COMPLIANCE -----	(CONTINUED)	
-----	-----	--	-------------	--

RECURRENCE RATE NUMBER, DEFINES
THE NUMBER N OF CONSECUTIVE TIME
SLOTS FROM THE ORIGINAL
TRANSMISSION TO THE DONATED TIME
SLOT: N=3X2 TO THE (15-RRN)
POWER.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: HANDOVER EXTENSION WORD

49	48	47	46:	45	44	43	42	41	40:	39	38	37	36	35	34	33	32	31	30	29	28	27:	26	25
<---			:	SPARE						:	LINK 4A ADDRESS										:	--->		
			:	6						:	13										:			

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50	
:																					
:																					
:	VOICE CALL SIGN																				
:																					
:											24										

WORD DESCRIPTION

WORD NUMBER: J10.3E0
WORD TITLE: HANDOVER EXTENSION WORD

REFERENCE		BIT #		RESOLUTION, CODING, ETC
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	
1550 001	WORD FORMAT	0-	1 2	10
769 010	TRACK NUMBER, OBJECTIVE	2-	20 19	
756 006	SPARE	21-	26 6	
291 001	LINK 4A ADDRESS	27-	39 13	
756 006	SPARE	40-	45 6	
264 001	VOICE CALL SIGN	46-	69 24	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	010	TRACK NUMBER, OBJECTIVE -----		THE TN OF THE OBJECT OF THE ACTION DESCRIBED IN THE MESSAGE. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE-BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANNN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6
00111	7
01000	A
01001	B
01010	C
01011	D
01100	E
01101	F
01110	G
01111	H
10000	J

FIELD CODING FOR J10.3E0

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	010	TRACK NUMBER, OBJECTIVE -----	(CONTINUED)	
				10001 K
				10010 L
				10011 M
				10100 N
				10101 P
				10110 Q
				10111 R
				11000 S
				11001 T
				11010 U
				11011 V
				11100 W
				11101 X
				11110 Y
				11111 Z
		00000	0	NO STATEMENT.
		00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		00077	63	ILLEGAL.
		00100-00175	64 THROUGH 125	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		00176	126	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		00177	127	COLLECTIVE ADDRESS.
		00200-07776	128 THROUGH 4094	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		07777	4095	ILLEGAL.
		0A000-0Z777	4096 THROUGH 16383	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		10000-17777	16384 THROUGH 20479	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.

FIELD CODING FOR J10.3E0

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	010	TRACK NUMBER, OBJECTIVE -----	(CONTINUED)	
		20000-27777	32768 THROUGH 36863	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION

5.2-388

MIL-STD-6016B

FIELD CODING FOR J10.3E0

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	010	TRACK NUMBER, OBJECTIVE -----	(CONTINUED)	
		70000-77776	114688 THROUGH 118782	REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		7A000-ZZ777	118784 THROUGH 524287	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS. ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
291	001	LINK 4A ADDRESS -----		THE ADDRESS OF A SPECIFIC AIRCRAFT ON TACTICAL DATA INFORMATION LINK LINK 4A.
		NUMERIC	00000 THROUGH 17777 (OCTAL)	
264	001	VOICE CALL SIGN -----		AN ALPHANUMERICALLY-CODED CALL SIGN USED IN VOICE COMMUNICATIONS TO IDENTIFY A FORCE ELEMENT. THE 24 BITS ARE DIVIDED INTO FOUR GROUPS OF 6 BITS. EACH GROUP IS INTERPRETED INDEPENDENTLY IN ACCORDANCE WITH THE FOLLOWING CODE:
		BLANK	0	
		1	1	
		2	2	
		3	3	
		4	4	
		5	5	
		6	6	
		7	7	
		8	8	
		9	9	
		A	10	
		B	11	
		C	12	
		D	13	
		E	14	

5.2-389

MIL-STD-6016B

FIELD CODING FOR J10.3E0 (SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
264	001	VOICE CALL SIGN	(CONTINUED)	

		F	15	
		G	16	
		H	17	
		I	18	
		J	19	
		K	20	
		L	21	
		M	22	
		N	23	
		O	24	
		P	25	
		Q	26	
		R	27	
		S	28	
		T	29	
		U	30	
		V	31	
		W	32	
		X	33	
		Y	34	
		Z	35	
		UNDEFINED	36 THROUGH 62	
		0 (ZERO)	63	

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J10.3C1
WORD TITLE: HANDOVER CONTINUATION WORD 1

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00	:						
VOICE FREQUENCY/CHANNEL									:	VFC:	:	CONTROL CHANNEL						:	CONTINUATION WORD					:	WORD	:					
									:	IND:	:							:	LABEL					:	FORMAT	:					
									:	:	:							:						:	:	:					
13									:	1	:	7						:	5					:	2	:					
49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25	:						
MODE III CODE, 1									:	LINK 4A FREQUENCY												:						:	---		>
									:													:						:			
12									:	13												:						:			
									:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50	:	
									:													:	SEC:	:	SQK:	:					
									:	SPARE												:	IND:	RADIO	TYPE	:	FLS:	:	---		>
									:													:	:	:	:	:	:	:			
									:	12												:	1	:	3	:	1	:			

WORD DESCRIPTION

WORD NUMBER: J10.3C1
WORD TITLE: HANDOVER CONTINUATION WORD 1

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	00001
348 006	CONTROL CHANNEL	7-	13 7	
898 001	VOICE FREQUENCY/CHANNEL INDICATOR (VFC IND)	14	1	
417 016	VOICE FREQUENCY/CHANNEL	15-	27 13	
417 017	LINK 4A FREQUENCY	28-	40 13	
295 003	MODE III CODE, 1	41-	52 12	
1650 001	SQUAWK FLASH INDICATOR (SQK FLS)	53	1	
1648 001	RADIO TYPE	54-	56 3	
1649 001	SECURE RADIO INDICATOR (SEC IND)	57	1	
756 012	SPARE	58-	69 12	

FIELD CODING FOR J10.3C1

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
348	006	CONTROL CHANNEL ----- CONTROL CHANNEL NUMBER NO STATEMENT	0 THROUGH 126 127	
898	001	VOICE FREQUENCY/CHANNEL INDICATOR ----- PRIMARY VOICE FREQUENCY/ CHANNEL ALTERNATE VOICE FREQUENCY/CHANNEL	0 1	INDICATES WHETHER THE VOICE FREQUENCY/CHANNEL IN THE MESSAGE IS THE PRIMARY OR THE ALTERNATE VOICE FREQUENCY/CHANNEL. THE VOICE FREQUENCY/CHANNEL IS THE PRIMARY VOICE FREQUENCY/CHANNEL. THE VOICE FREQUENCY/CHANNEL IS THE ALTERNATE VOICE FREQUENCY/CHANNEL.
417	016	VOICE FREQUENCY/CHANNEL ----- NO STATEMENT UHF FREQUENCY ILLEGAL CHANNEL GROUP A CHANNEL GROUP B ILLEGAL	0 1 THROUGH 7000 7001 THROUGH 7039 7040 THROUGH 7167 7168 THROUGH 7295 7296 THROUGH 8191	IDENTIFIES A UHF VOICE RADIO CHANNEL NUMBER TO ACCOUNT FOR 7000 POSSIBLE RADIO FREQUENCIES IN THE 225 TO 400 MHZ BAND OR THE OPTION OF SELECTING CHANNEL GROUP A OR CHANNEL GROUP B. THE BIT CODE IS RELATED TO THE UHF FREQUENCY BY USING THE FOLLOWING FORMULA: $\text{FREQ(MHZ)} = 225 + .025(N-1)$ WHERE N = BIT CODE NUMBER. 128 CHANNELS FROM 0-127. 128 CHANNELS FROM 0-127.
417	017	LINK 4A FREQUENCY ----- NO STATEMENT UHF FREQUENCY ILLEGAL	0 1 THROUGH 7000 7001 THROUGH 8191	IDENTIFIES A UHF VOICE RADIO CHANNEL NUMBER TO ACCOUNT FOR 7000 POSSIBLE RADIO FREQUENCIES IN THE 225 TO 400 MHZ BAND. THE BIT CODE IS RELATED TO THE UHF FREQUENCY BY USING THE FOLLOWING FORMULA: $\text{FREQ(MHZ)} = 225 + .025(N-1)$ WHERE N = BIT CODE NUMBER.
295	003	MODE III CODE, 1 -----		PROVIDES MODE III BEACON CODE WHICH IS ASSIGNED BY THE NEW CONTROLLING

5.2-394

MIL-STD-6016B

FIELD CODING FOR J10.3C1

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
295	003	MODE III CODE, 1 -----	(CONTINUED)	
		NO STATEMENT	0	UNIT TO THE CONTROLLED AIRCRAFT. THIS CODE CANNOT BE ASSIGNED AS AN OPERATIONAL CODE. INDICATES THERE ARE NO DATA FOR TRANSMISSION.
		1 THROUGH 7777 (OCTAL)	0001 THROUGH 7777 (OCTAL)	WITHIN THE FIELD, SIF CODES ARE IN THE ORDER A, B, C, D WITH EACH TRIAD IN THE ORDER 4, 2, 1.
1650	001	SQUAWK FLASH INDICATOR -----		DIRECTS THE PILOT TO SQUAWK FLASH.
		NO STATEMENT	0	
		SQUAWK FLASH	1	
1648	001	RADIO TYPE -----		SPECIFIES THE TYPE OF RADIO.
		NO STATEMENT	0	
		UHF-AM	1	
		VHF-AM	2	
		VHF-FM	3	
		HF-SSB UPPER	4	
		HF	5	
		UHF-FM	6	
		HF-SSB LOWER	7	
1649	001	SECURE RADIO INDICATOR -----		SPECIFIES WHETHER OR NOT A RADIO IS OPERATING IN THE SECURE MODE.
		NO STATEMENT	0	
		RADIO IN SECURE MODE	1	

.....

WORD TITLE: HANDOVER CONTINUATION WORD 2

49	48	47:	46	45	44	43	42	41	40	39:	38	37	36	35	34	33	32	31:	30	29	28	27	26	25		
<---			:	DISUSED							:	DISUSED							:	DISUSED						
			:	8							:	8							:	8						

:	69	68	67	66	65	64	63:	62	61	60	59	58	57	56	55:	54	53	52	51	50	
:	SPARE							:	DISUSED							:	DISUSED				
:	7							:	8							:	8				

WORD DESCRIPTION

WORD NUMBER: J10.3C2

WORD TITLE: HANDOVER CONTINUATION WORD 2

REFERENCE			BIT	#	
DFI/DUI	DATA FIELD	DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD	FORMAT	0-	1 2	01
1551 001	CONTINUATION	WORD LABEL	2-	6 5	00010
725 003	MISSION	CORRELATOR	7-	14 8	
758 008	DISUSED		15-	22 8	
758 008	DISUSED		23-	30 8	
758 008	DISUSED		31-	38 8	
758 008	DISUSED		39-	46 8	
758 008	DISUSED		47-	54 8	
758 008	DISUSED		55-	62 8	
756 007	SPARE		63-	69 7	

FIELD CODING FOR J10.3C2 (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
725	003	MISSION CORRELATOR -----		SPECIFIES THE IDENTIFYING NUMBER ASSIGNED TO AN OVERALL MISSION. THIS ENABLES PARTICIPANTS WITH DIFFERENT OBJECTIVES ON SPECIFIC MISSIONS TO BE ASSOCIATED WITH THE SAME OVERALL MISSION.
		NO STATEMENT NUMERIC	0 1 THROUGH 255	

MIL-STD-6016B

J10.5 MESSAGE SUMMARY

PURPOSE

The J10.5 Controlling Unit Report Message is used to identify the JU that is controlling the track and to provide the mission correlator and/or voice call sign if applicable.

DATA ELEMENT SUMMARY

<u>J10.5I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
TRACK NUMBER, REFERENCE	19
VOICE CALL SIGN	24
HANDOVER INDICATOR	1
MISSION CORRELATOR	8
CONTROLLING UNIT STATUS	1
SPARE	4

MIL-STD-6016B

J10.5 TRANSMIT/RECEIVE RULES

TITLE: Controlling Unit Report Message

TRANSMIT RULES

1. The J10.5 Controlling Unit Report message shall be transmitted 3 times initially at an RRN = 6 (12 seconds, 8-20 second interval) when a C² JU assumes control of a track. Thereafter, it is updated periodically at an RRN = 3 (96 seconds, 72-120 second interval).
2. When data change, the J10.5 message shall be sent 3 times at the same RRN as an initial transmission, beginning at the next transmission opportunity. The JU then resumes updating in accordance with rule 1.
3. When requested by another JU in a J7.1 (ACT = 1) Data Update Request message on a specific TN, the J10.5 message shall be sent 3 times at the same RRN as an initial transmission, beginning at the next transmission opportunity. The JU then resumes updating in accordance with rule 1.
4. When a C² JU terminates control of a track, the J10.5 message shall be sent 3 times at the same RRN as an initial transmission. It is not updated.

RECEIVE RULES

There are no receive rules specified for this message.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J10.5I

WORD TITLE: CONTROLLING UNIT REPORT INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00	:							
TRACK NUMBER, REFERENCE												:	MESSAGE	:	SUBLABEL,	:	WORD						:									
												:	LENGTH	:	J-SERIES	:	LABEL, J-SERIES						:	FORMAT	:							
												:	INDICATOR	:																		:
19												:	3	:	3	:	5						:	2	:							
49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25	:							
VOICE CALL SIGN																	:									:	---		:			
																	:									:			:			
24																	:									:			:			
					:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50	:						
					:						:	CNT	:											:	:	:						
					:	SPARE					:	UNT	:	MISSION CORRELATOR										:	H/I	:	---		:			
					:						:	:	:											:	:	:			:			
					:	4					:	1	:	8					:	1	:						:					

WORD DESCRIPTION

WORD NUMBER: J10.5I

WORD TITLE: CONTROLLING UNIT REPORT INITIAL WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	00
270 004	LABEL, J-SERIES	2-	6 5	01010
271 005	SUBLABEL, J-SERIES	7-	9 3	101
800 001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITONAL WORDS.
769 002	TRACK NUMBER, REFERENCE	13-	31 19	
264 001	VOICE CALL SIGN	32-	55 24	
325 001	HANDOVER INDICATOR (H/I)	56	1	
725 003	MISSION CORRELATOR	57-	64 8	
1670 001	CONTROLLING UNIT STATUS (CNT UNT)	65	1	
756 004	SPARE	66-	69 4	

FIELD CODING FOR J10.5I (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----		A REFERENCE NUMBER USED TO ASSOCIATE INFORMATION AND DIRECTIVES WITH THE TRACK. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE-BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANNN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6
00111	7
01000	A
01001	B
01010	C
01011	D
01100	E
01101	F
01110	G
01111	H

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
				10000 J
				10001 K
				10010 L
				10011 M
				10100 N
				10101 P
				10110 Q
				10111 R
				11000 S
				11001 T
				11010 U
				11011 V
				11100 W
				11101 X
				11110 Y
				11111 Z
		00000	0	NO STATEMENT.
		00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU). ILLEGAL.
		00077	63	
		00100-00175	64 THROUGH 125	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU). RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		00176	126	COLLECTIVE ADDRESS.
		00177	127	
		00200-07776	128 THROUGH 4094	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		07777	4095	ILLEGAL.
		0A000-0Z777	4096 THROUGH 16383	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		10000-17777	16384 THROUGH 20479	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND

FIELD CODING FOR J10.5I

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		20000-27777	32768 THROUGH 36863	REFERENCE POINTS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE

FIELD CODING FOR J10.5I (SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		70000-77776	114688 THROUGH 118782	USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
264	001	VOICE CALL SIGN -----		AN ALPHANUMERICALLY-CODED CALL SIGN USED IN VOICE COMMUNICATIONS TO IDENTIFY A FORCE ELEMENT. THE 24 BITS ARE DIVIDED INTO FOUR GROUPS OF 6 BITS. EACH GROUP IS INTERPRETED INDEPENDENTLY IN ACCORDANCE WITH THE FOLLOWING CODE:
		BLANK	0	
		1	1	
		2	2	
		3	3	
		4	4	
		5	5	
		6	6	
		7	7	
		8	8	
		9	9	
		A	10	
		B	11	
		C	12	
		D	13	
		E	14	
		F	15	
		G	16	
		H	17	
		I	18	
		J	19	

FIELD CODING FOR J10.5I

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
264	001	VOICE CALL SIGN -----	(CONTINUED)	
		K	20	
		L	21	
		M	22	
		N	23	
		O	24	
		P	25	
		Q	26	
		R	27	
		S	28	
		T	29	
		U	30	
		V	31	
		W	32	
		X	33	
		Y	34	
		Z	35	
		UNDEFINED	36 THROUGH 62	
		0 (ZERO)	63	
325	001	HANDOVER INDICATOR -----		INDICATES THAT A HANDOVER OF CONTROL OF A REFERENCE TRACK IS IN PROGRESS.
		NO STATEMENT	0	
		HANDOVER IN PROGRESS	1	
725	003	MISSION CORRELATOR -----		SPECIFIES THE IDENTIFYING NUMBER ASSIGNED TO AN OVERALL MISSION. THIS ENABLES PARTICIPANTS WITH DIFFERENT OBJECTIVES ON SPECIFIC MISSIONS TO BE ASSOCIATED WITH THE SAME OVERALL MISSION.
		NO STATEMENT	0	
		NUMERIC	1 THROUGH 255	
1670	001	CONTROLLING UNIT STATUS -----		INDICATES THE CONTROL OF A REFERENCE TRACK.
		TERMINATING CONTROL OF REFERENCE TRACK	0	
		MAINTAINING CONTROL OF REFERENCE TRACK	1	

5.2-408

MIL-STD-6016B

MIL-STD-6016B

J10.6 MESSAGE SUMMARY

PURPOSE

The J10.6 Pairing Message provides a means to indicate a pairing (not engagement status) between a friendly track and another track or point.

DATA ELEMENT SUMMARY

<u>J10.6I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
TRACK NUMBER, REFERENCE	19
TRACK NUMBER, OBJECTIVE	19
PAIRING ACTION	4
SPARE	15

MIL-STD-6016B

J10.6 TRANSMIT/RECEIVE RULES

TITLE: Pairing Message

TRANSMIT RULES

1. The J10.6 Pairing message shall be transmitted only by the JU responsible for reporting controlled track data on the Reference TN. Pairings for other than controlled tracks may be reported by any JU establishing the pairing.
2. The J10.6 message shall be transmitted once and shall be updated thereafter at an RRN = 3 (96 seconds, 72-120 second interval).
3. The J10.6 message shall have been preceded by track/point messages on the subjects of the pairing.
4. The J10.6 message with the Pairing Action field value equal to 15 shall terminate a pairing. Pairings may be terminated only by the JU responsible for reporting the pairing. The J10.6 message with the Pairing Action value equal to 15 shall be transmitted 3 times at an RRN = 6 (12 seconds, 8-20 second interval). When the JU transmitting the J10.6 message with the terminate pairing value set establishes a new pairing on the Reference TN and Objective TN, it may discontinue the terminate pairing action transmission prior to completion.

RECEIVE RULES

There are no receive rules specified for this message.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J10.6I
WORD TITLE: PAIRING INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00	:		
TRACK NUMBER, REFERENCE												:	MESSAGE	:	SUBLABEL,	:							:	WORD	:		
												:	LENGTH	:	J-SERIES	:	LABEL, J-SERIES						:	FORMAT	:		
												:	INDICATOR	:							:		:		:		
19												:	3	:	3	:	5						:	2	:		
49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25	:		
TRACK NUMBER, OBJECTIVE																		:							---		
																		:									
19																		:									
					:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50	:	
					:	SPARE															:	PAIRING ACTION					---
					:																:						
					:	15															:	4					:

WORD DESCRIPTION

WORD NUMBER: J10.6I
WORD TITLE: PAIRING INITIAL WORD

REFERENCE		BIT #		RESOLUTION, CODING, ETC
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	
1550 001	WORD FORMAT	0-	1 2	00
270 004	LABEL, J-SERIES	2-	6 5	01010
271 005	SUBLABEL, J-SERIES	7-	9 3	110
800 001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
769 002	TRACK NUMBER, REFERENCE	13-	31 19	
769 010	TRACK NUMBER, OBJECTIVE	32-	50 19	
400 002	PAIRING ACTION	51-	54 4	
756 015	SPARE	55-	69 15	

FIELD CODING FOR J10.6I

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----		A REFERENCE NUMBER USED TO ASSOCIATE INFORMATION AND DIRECTIVES WITH THE TRACK. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE-BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANNN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6
00111	7
01000	A
01001	B
01010	C
01011	D
01100	E
01101	F
01110	G
01111	H

FIELD CODING FOR J10.6I

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
				10000 J
				10001 K
				10010 L
				10011 M
				10100 N
				10101 P
				10110 Q
				10111 R
				11000 S
				11001 T
				11010 U
				11011 V
				11100 W
				11101 X
				11110 Y
				11111 Z
		00000	0	NO STATEMENT.
		00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU). ILLEGAL.
		00077	63	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU). RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		00100-00175	64 THROUGH 125	COLLECTIVE ADDRESS.
		00176	126	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		00177	127	ILLEGAL.
		00200-07776	128 THROUGH 4094	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		07777	4095	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		0A000-0Z777	4096 THROUGH 16383	ILLEGAL.
		10000-17777	16384 THROUGH 20479	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
				ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND

5.2-415

MIL-STD-6016B

FIELD CODING FOR J10.6I

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		20000-27777	32768 THROUGH 36863	REFERENCE POINTS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE

5.2-416

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		70000-77776	114688 THROUGH 118782	USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		7A000-ZZ777	118784 THROUGH 524287	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
				ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
769	010	TRACK NUMBER, OBJECTIVE -----		THE TN OF THE OBJECT OF THE ACTION DESCRIBED IN THE MESSAGE. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE-BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANNN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.
				CODING CHARACTER

FIELD CODING FOR J10.6I (SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	010	TRACK NUMBER, OBJECTIVE -----	(CONTINUED)	
				00000 0
				00001 1
				00010 2
				00011 3
				00100 4
				00101 5
				00110 6
				00111 7
				01000 A
				01001 B
				01010 C
				01011 D
				01100 E
				01101 F
				01110 G
				01111 H
				10000 J
				10001 K
				10010 L
				10011 M
				10100 N
				10101 P
				10110 Q
				10111 R
				11000 S
				11001 T
				11010 U
				11011 V
				11100 W
				11101 X
				11110 Y
				11111 Z
		00000	0	NO STATEMENT.
		00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		00077	63	ILLEGAL.
		00100-00175	64 THROUGH 125	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		00176	126	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		00177	127	COLLECTIVE ADDRESS.
		00200-07776	128 THROUGH 4094	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO

FIELD CODING FOR J10.6I

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	010	TRACK NUMBER, OBJECTIVE -----	(CONTINUED)	
		07777	4095	C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS. ILLEGAL.
		0A000-0Z777	4096 THROUGH 16383	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		10000-17777	16384 THROUGH 20479	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		20000-27777	32768 THROUGH 36863	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND

5.2-419

MIL-STD-6016B

FIELD CODING FOR J10.6I

(SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	010	TRACK NUMBER, OBJECTIVE -----	(CONTINUED)	
		50000-57777	81920 THROUGH 86015	REFERENCE POINTS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		70000-77776	114688 THROUGH 118782	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
400	002	PAIRING ACTION -----		INDICATES A PAIRING (NOT AN ENGAGE- MENT) OR ASSOCIATION OF DATA BE- TWEEN A FRIENDLY TRACK AND ANOTHER TRACK OR POINT.
		UNDEFINED	0	
		GENERAL PAIRING	1	
		INTERDICTION PAIRING	2	
		RENDEZVOUS PAIRING	3	
		COMBAT AIR PATROL PAIRING	4	
		CLOSE AIR SUPPORT PAIRING	5	

5.2-420

MIL-STD-6016B

FIELD CODING FOR J10.6I (SHEET 8)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
400	002	PAIRING ACTION	(CONTINUED)	

		RETURN TO BASE PAIRING	6	
		TANKER PAIRING	7	
		UNDEFINED	8 THROUGH 14	
		TERMINATE PAIRING	15	

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

TABLE J12-1. J12 Control Word Applicability Table

INITIAL WORD	SUBLABEL							
	J12.0I MISSION ASSIGNMENT	J12.1I VECTOR	J12.2I PRECISION AIRCRAFT DIRECTION	J12.3I FLIGHT PATH	J12.4I CONTROLLING UNIT CHANGE	J12.5I TARGET/TRACK CORRELATION	J12.6I TARGET SORTING	J12.7I TARGET BEARING
EXTENSION WORD - 0		J12.1E0		J12.3E0	J12.4E0	J12.5E0	J12.6E0	J12.7E0
1						J12.5E1		J12.7E1
CONTINUATION WORD - 0								
1	J12.0C1 TARGET POSITION						J12.6C1 ENGAGEMENT STATUS	J12.7C1 TARGET BEARING WORD 1
2	J12.0C2 TARGET DATA						J12.6C2 FUSION TYPE	J12.7C2 TARGET BEARING WORD 2
3	J12.0C3 POINT LOCATION						J12.6C3 KINEMATIC QUALITY	
4	J12.0C4 SURFACE ATTACK						J12.6C4 IDENTITY/ SPECIFIC TYPE AMBIGUITY	
5	J12.0C5 BOMBING						J12.6C5 FUTURE EVENT	
6	J12.0C6 TARGETING						J12.6C6 SENSOR MANAGEMENT	
7	J12.0C7 THIRD PARTY						J12.6C7 (NEEDLINE ONLY) KINEMATIC DATA 1	
...								
31								

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

J12.0 MESSAGE SUMMARY

PURPOSE

The J12.0 Mission Assignment Message is used by C² JUs to assign missions, designate targets, and provide target information to nonC² JU platforms. Provision is made for the nonC² JU platforms to acknowledge the message through receipt/compliance action.

DATA ELEMENT SUMMARY

<u>J12.0I</u>		<u>J12.0C2 (Continued)</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	SURFACE (MARITIME) SPECIFIC	*
LABEL, J-SERIES	5	TYPE(12)	*
SUBLABEL, J-SERIES	3	SUBSURFACE (MARITIME) SPECIFIC	*
MESSAGE LENGTH INDICATOR	3	TYPE(12)	*
TRACK NUMBER, ADDRESSEE	15	LAND (GROUND) SPECIFIC	*
MISSION ASSIGNMENT DISCRETE	6	TYPE(12)	*
DISUSED	3	SPARE(12)*****	12
DISUSED	2	SPECIAL INTEREST INDICATOR	1
TRACK NUMBER, OBJECTIVE	19		
THREAT WARNING ENVIRONMENT	3	<u>J12.0C3</u>	
RECEIPT/COMPLIANCE	5	DATA ELEMENT	# BITS
RECURRENCE RATE, RECEIPT/COMPLIANCE	4	WORD FORMAT	2
		CONTINUATION WORD LABEL	5
		LATITUDE, 0.0013 MINUTE	23
		LONGITUDE, 0.0013 MINUTE	24
		ELEVATION, 25 FT, 1	10
		POINT TYPE, 1	4
		POINT NUMBER	2
		<u>J12.0C4</u>	
		DATA ELEMENT	# BITS
		WORD FORMAT	2
		CONTINUATION WORD LABEL	5
		TARGET TYPE	5
		TARGET DEFENSES	3
		RUN IN HEADING	9
		EGRESS HEADING	9
		NUMBER OF STORES	6
		TYPE OF STORES	8
		MODE OF DELIVERY	7
		TIME DISCRETE	3
		SPARE	2
		MINUTE	6
		HOUR	5
		<u>J12.0C5</u>	
		DATA ELEMENT	# BITS
		WORD FORMAT	2
		CONTINUATION WORD LABEL	5
		TARGET RANGE	15
		TARGET BEARING	16
		DELTA ELEVATION	15

MIL-STD-6016B

J12.0 MESSAGE SUMMARY (Continued)

DATA ELEMENT SUMMARY (Continued)

J12.0C5 (Continued)

<u>DATA ELEMENT</u>	<u># BITS</u>
BEACON CODE	6
LATITUDE, LSB	1
LONGITUDE, LSB	1
ELEVATION, LSBS	3
SPARE	6

J12.0C6

<u>DATA ELEMENT</u>	<u># BITS</u>
WORD FORMAT	2
CONTINUATION WORD LABEL	5
LASER ILLUMINATOR CODE	16
TRACK NUMBER, RELATED 3	19
INDEX NUMBER, RELATED	6
SPARE	22

J12.0C7

<u>DATA ELEMENT</u>	<u># BITS</u>
WORD FORMAT	2
CONTINUATION WORD LABEL	5
TRACK NUMBER, INDEX ORIGINATOR	15
INDEX NUMBER, THIRD PARTY	6
ELEVATION ANGLE, 2	15
SPARE	27

MIL-STD-6016B

J12.0 TRANSMIT/RECEIVE RULES

TITLE: Mission Assignment Message

TRANSMIT RULES

1. The J12.0 Mission Assignment message shall be transmitted by any C² JU responsible for controlling tactical weapon systems. The J12.0 may also be transmitted, optionally, by nonC² JUs to make assignments to other nonC² JUs. Table J12-2 indicates word sequences, R/C values, and message priorities for each Mission Assignment Discrete value. The orders and word sequences associated with each Mission Assignment Discrete value show how the J12.0 message shall be used to support the various tactical missions. Transmission of the J12.0 message with the various R/C values set shall be in accordance with procedures specified in paragraph 4.1.7.

2. Mission assignments against a target that is a line of bearing (LOB) are transmitted in a J12.0I/J12.0C1/J12.0C3/J12.0C5 word sequence. J12.0C7 word may be added if elevation angle data are available. The Point Type, 1 field shall be set to value 15, Origin of Bearing, and the Latitude and Longitude fields will specify that location in the J12.0C3 word. The Latitude and Longitude fields in the J12.0C1 word shall be set to No Statement.

3. An Additional J12.0I/J12.0C3/J12.0C6 or, if transmitted by a nonC² JU in order to report an Index Number, a J12.0I/J12.0C1/J12.0C3/J12.0C6 word sequence with the MAD field set to value 43, Related Mission Data, may be transmitted to provide supplemental ASO mission information. The Point Type, 1 field shall be set to other than value 1, Target, or 15, Origin of Bearing. The Related 3 TN or Related IN fields shall be the Objective TN or IN from the related J12.0.

RECEIVE RULES

There are no receive rules specified for this message.

TABLE J12-2. Required Word Sequences and Receipt/Compliance Values for
Mission Assignment Discrete Values (Sheet 1 of 7)

MISSION ASSIGNMENT DISCRETE VALUE	J12.0 WORD SEQUENCES REQUIRED								R/C VAL ¹	MSG PRI ²	MISSION ASSIGNMENT DISCRETE VALUE DESCRIPTOR
	I	C1	C2	C3	C4	C5	C6	C7			
0 - NO STATEMENT											NOT USED.
1 - REFUEL	X	X	4						0	R	ORDERS OTHER THAN AN ASO AIRCRAFT TO REFUEL AND PROVIDES THE TANKER'S LOCATION. ³
-- OR -- REFUEL	X		4	X					0	R	ORDERS AN ASO AIRCRAFT TO REFUEL AND PROVIDES THE TANKER'S LOCATION. ³
2 - ORBIT	X	X	4						0	R	ORDERS OTHER THAN AN ASO AIRCRAFT TO ORBIT AT A SPECIFIC LOCATION. ³
-- OR -- ORBIT	X		4	X					0	R	ORDERS AN ASO AIRCRAFT TO ORBIT AT A SPECIFIC LOCATION. ³
3 - RECALL	X	X	4						0 or 1	R	ORDERS OTHER THAN AN ASO AIRCRAFT TORECALL TO A SPECIFIC LOCATION. ³
-- OR -- RECALL	X		4	X					0 or 1	R	ORDERS AN ASO AIRCRAFT TO RECALL TO A SPECIFIC LOCATION. ³
4 - RETURN TO BASE	X	X	4						0 or 1	R	ORDERS OTHER THAN AN ASO AIRCRAFT TO RETURN TO A SPECIFIC BASE. ³
-- OR -- RETURN TO BASE	X		4	X					0 or 1	R	ORDERS AN ASO AIRCRAFT TO RETURN TO ASPECIFIC BASE. ³
5 - ENGAGE	X	X	X						0	P	ORDERS THE DESTRUCTION OF AN AIR TARGET AND PROVIDES TARGET DATA. ³
6 - PRIORITY KILL	X	X	X						0	P	ORDERS A HIGH PRIORITY ON THE DESTRUCTION OF A SPECIFIC AIR TARGET FIRST. ³

5.2-428

MIL-STD-6016B

TABLE J12-2. Required Word Sequences and Receipt/Compliance Values for
Mission Assignment Discrete Values (Sheet 2 of 7)

MISSION ASSIGNMENT DISCRETE VALUE	J12.0 WORD SEQUENCES REQUIRED								R/C VAL ¹	MSG PRI ²	MISSION ASSIGNMENT DISCRETE VALUE DESCRIPTOR
	I	C1	C2	C3	C4	C5	C6	C7			
7 - BREAK ENGAGEMENT	X								0	P	TERMINATES A PREVIOUS ORDER TO DESTROY AN AIR TARGET.
8 - INVESTIGATE/ INTERROGATE	X	X	X						0	P	ORDERS AN AIRCRAFT TO INVESTIGATE/INTERROGATE AN AIR TARGET AND PROVIDES TARGET DATA. ³
9 - CLEAR TO DROP	X			X					0	R	PROVIDES THE CLEARANCE FOR A TACAIR TRANSPORT AIRCRAFT TO DROP ITS STORES AT A SPECIFIC LOCATION.
10 - CEASE/DO NOT DROP	X								0	P	ORDERS A TACAIR TRANSPORT AIRCRAFT TO STOP DROPPING ITS STORES OR NOT TO DROP ANY STORES.
11 - INTERVENE	X	X	X						0	P	ORDERS AN AIRCRAFT TO TAKE ACTION TO DIVERT A DESIGNATED TARGET FROM ITS INTENDED FLIGHT PATH. ³
12 - DIVERT	X	X							0 or 1	R	ORDERS OTHER THAN AN ASO AIRCRAFT TO DIVERT TO A SPECIFIC LOCATION. ³
-- OR -- DIVERT	X			X					0 or 1	R	ORDERS AN ASO AIRCRAFT TO DIVERT TO A SPECIFIC LOCATION. ³
13 - AIR-TO- SURFACE	X								0 or 1	R	ORDERS AN AIRCRAFT TO CHANGE ITS MISSION TO AIR-TO- SURFACE.
14 - AIR-TO-AIR	X								0 or 1	R	ORDERS AN AIRCRAFT TO CHANGE ITS MISSION TO AIR-TO-AIR.
15 - SEARCH AND RESCUE	X	X							0	R	ORDERS OTHER THAN AN ASO AIRCRAFT TO A SEARCH AND RESCUE MISSION AND PROVIDES A SPECIFIC LOCATION. ³
-- OR -- SEARCH AND RESCUE	X			X					0	R	ORDERS AN ASO AIRCRAFT TO A SEARCH AND RESCUE MISSION AND PROVIDES A SPECIFIC LOCATION. ³

TABLE J12-2. Required Word Sequences and Receipt/Compliance Values for
Mission Assignment Discrete Values (Sheet 3 of 7)

MISSION ASSIGNMENT DISCRETE VALUE	J12.0 WORD SEQUENCES REQUIRED								R/C VAL ¹	MSG PRI ²	MISSION ASSIGNMENT DISCRETE VALUE DESCRIPTOR
	I	C1	C2	C3	C4	C5	C6	C7			
16 - COMBAT AIR PATROL	X	X	X						0	R	ORDERS AN AIRCRAFT TO A COMBAT AIR PATROL MISSION AND PROVIDES DATA ON THE COMBAT AIR PATROL STATION.
17 - PRECISION BOMBING	X			X	X				0	R	ORDERS AN AIRCRAFT TO A PRECISION BOMBING MISSION AND PROVIDES THE TARGET LOCATION. ³
18 - LASER DESIGNATION	X			X			X		0	P	ORDERS AN AIRCRAFT TO A LASER DESIGNATION MISSION AND PROVIDES DATA ON THE TARGET. ³
19 - BEACON BOMBING	X			X	X	X			0	P	ORDERS AN AIRCRAFT TO A BEACON BOMBING MISSION AND PROVIDES DATA ON THE TARGET. ³
20 - CLOSE AIR SUPPORT	X			X					0	P	ORDERS AN AIRCRAFT TO A CLOSE AIR SUPPORT MISSION AND PROVIDES DATA ON THE TARGET. ³
21 - INTERDICTION	X			X					0	R	ORDERS AN AIRCRAFT TO AN INTERDICTION MISSION AND PROVIDES DATA ON THE TARGET. ³
22 - AERIAL RECONNAISSANCE	X	X							0	R	ORDERS OTHER THAN AN ASO AIRCRAFT TO A RECONNAISSANCE MISSION AND PROVIDES DATA ON THE TARGET. ³
-- OR -- AERIAL RECONNAISSANCE	X			X					0	R	ORDERS AN ASO AIRCRAFT TO A RECONNAISSANCE MISSION AND PROVIDES DATA ON THE TARGET. ³

5.2-430

MIL-STD-6016B

TABLE J12-2. Required Word Sequences and Receipt/Compliance Values for
Mission Assignment Discrete Values (Sheet 4 of 7)

MISSION ASSIGNMENT DISCRETE VALUE	J12.0 WORD SEQUENCES REQUIRED								R/C VAL ¹	MSG PRI ²	MISSION ASSIGNMENT DISCRETE VALUE DESCRIPTOR
	I	C1	C2	C3	C4	C5	C6	C7			
23 - ESCORT	X	X	X						0	R	ORDERS OTHER THAN AN ASO AIRCRAFT TO AN ESCORT MISSION AND PROVIDES DATA ON THE AIRCRAFT TO BE ESCORTED. ³
-- OR -- ESCORT	X		4	X					0	R	ORDERS AN ASO AIRCRAFT TO AN ESCORT MISSION AND PROVIDES DATA ON THE AIRCRAFT TO BE ESCORTED. ³
24 - SHADOW	X	X	X						0	R	ORDERS AN AIRCRAFT TO MAINTAIN SURVEILLANCE ON A DESIGNATED TARGET AND PROVIDES TARGET DATA. ³
25 - WEAPONS FREE	X								0 or 1	P	TRANSMITS A CONDITION OF WEAPONS FREE WITHOUT SPECIFYING A TARGET.
26 - WEAPONS TIGHT	X								0 or 1	P	TRANSMITS A CONDITION OF WEAPONS TIGHT WITHOUT SPECIFYING A TARGET.
27 - SALVO/CLEAR AIRCRAFT	X	X							0 or 1	P	ORDERS OTHER THAN AN ASO AIRCRAFT TO AVOID A SPECIFIED LOCATION. ³
-- OR -- SALVO/CLEAR AIRCRAFT	X			X					0 or 1	P	ORDERS AN ASO AIRCRAFT TO AVOID A SPECIFIED LOCATION. ³

5.2-431

MIL-STD-6016B

TABLE J12-2. Required Word Sequences and Receipt/Compliance Values for
Mission Assignment Discrete Values (Sheet 5 of 7)

MISSION ASSIGNMENT DISCRETE VALUE	J12.0 WORD SEQUENCES REQUIRED								R/C VAL ¹	MSG PRI ²	MISSION ASSIGNMENT DISCRETE VALUE DESCRIPTOR
	I	C1	C2	C3	C4	C5	C6	C7			
28 - ALERT CONDITION WHITE	X								1	P	BROADCAST AN ALERT CONDITION OF WHITE.
29 - ALERT CONDITION YELLOW	X								1	P	BROADCAST AN ALERT CONDITION OF YELLOW.
30 - ALERT CONDITION RED	X								1	P	BROADCAST AN ALERT CONDITION OF RED.
31 - COVER	X	X	X						0	P	ORDERS AN AIRCRAFT TO MAINTAIN A POSITION, RELATIVE TO A DESIGNATED TARGET, FROM WHICH A SUCCESSFUL INTERCEPT CAN TAKE EFFECT IF NEEDED. ³
32 - VISUAL IDENTIFICATION -- OR -- VISUAL IDENTIFICATION	X	X	X						0	P	ORDERS OTHER THAN AN ASO AIRCRAFT TO VISUALLY IDENTIFY A TARGET AND PROVIDES TARGET DATA. ³
	X		4	X					0	P	ORDERS AN ASO AIRCRAFT TO VISUALLY IDENTIFY A TARGET AND PROVIDES TARGET DATA. ³
34 - GO TO VOICE	X								0 or 1	P	ORDERS NONC ² JUS TO ESTABLISH VOICE COMMUNICATIONS WITH CONTROL AGENCY.
35 - HIGH INTEREST TRACK DESIGNATION	X	X	X						1 or 5	P	ORDERS NONC ² JUS TO ESTABLISH AND MAINTAIN TRACK DATA ON A HIGH INTEREST TRACK DESIGNATED BY TN, OBJECTIVE.
36 - CANCEL HIGH INTEREST TRACK DESIGNATION	X								1 or 5	P	ORDERS NONC ² JUS TO CANCEL THE HIGH INTEREST DESIGNATION OF TN, OBJECTIVE.
37 - SENSOR TARGET REPORTS ON	X								5	P	ORDERS A NONC ² JU TO REPORT ALL LOCALLY DERIVED TARGETS ON THE CONTROL NPG.

5.2-432

MIL-STD-6016B

TABLE J12-2. Required Word Sequences and Receipt/Compliance Values for
Mission Assignment Discrete Values (Sheet 6 of 7)

MISSION ASSIGNMENT DISCRETE VALUE	J12.0 WORD SEQUENCES REQUIRED								R/C VAL ¹	MSG PRI ²	MISSION ASSIGNMENT DISCRETE VALUE DESCRIPTOR
	I	C1	C2	C3	C4	C5	C6	C7			
38 - SENSOR TARGET REPORTS OFF	X								5	P	ORDERS A NONC ² JU TO CEASE REPORTING ALL LOCALLY DERIVED TARGETS ON THE CONTROL NPG. THIS DOES NOT INHIBIT ENGAGEMENT REPORTS.
39 - SUPPRESSION OF ENEMY AIR DEFENSES	X			X		5			0	P	ORDERS AN ASO AIRCRAFT TO A SEAD MISSION AND PROVIDES TARGET DATA.
40 - ARMED RECONNAISSANCE	X			X					0	P	ORDERS AN ASO AIRCRAFT TO AN ARMED RECONNAISSANCE MISSION AND PROVIDES TARGET DATA.
41 - ATTACK	X			X					0	P	CLEARs AN ASO AIRCRAFT TO ATTACK THE TARGET AND PROVIDES TARGET DATA.
42 - CEASE ATTACK	X								0	P	ORDERS AN ASO AIRCRAFT TO CEASE ATTACKING THE TARGET.
43 - RELATED MISSION DATA	X			X			X		5	P	PROVIDES AN ASO AIRCRAFT ADDITIONAL TARGET DATA ON ASSIGNED TARGET.
44 - COUNTER AIR ATTACK	X			X					0	P	ORDERS AN ASO AIRCRAFT TO A COUNTER AIR ATTACK MISSION AND PROVIDES TARGET DATA.
45 - FIGHTER SWEEP	X								0	P	ORDERS A NONC ² JU TO A FIGHTER SWEEP MISSION.
46 - CEASE FIRE	X								0	P	ORDERS A NONC ² JU SAM SITE NOT TO FIRE AGAINST THE SPECIFIED TARGET. IF FIRING HAS OCCURRED, PERMIT MISSILES IN FLIGHT TO CONTINUE INTERCEPT.
47 - HOLD FIRE	X								0	P	EMERGENCY ORDER. A NONC ² JU SAM SITE NOT TO FIRE AGAINST THE SPECIFIED TARGET. IF FIRING HAS OCCURRED, DESTROY THE MISSILES IN FLIGHT.
48-62 - UNDEFINED	-	-	-	-	-	-	-		-	-	
63 - CEASE MISSION	X								0 or 1	P	ORDERS A NONC ² JU TO CLEAR ANY PREVIOUS ORDER AGAINST A SPECIFIC TARGET EXCEPT FOR ENGAGE, PRIORITY KILL, CLEAR TO DROP, OR ATTACK (THESE ARE CLEARED WITH A BREAK ENGAGE, CEASE/DO NOT DROP, OR CEASE ATTACK). TN, OBJECTIVE DESIGNATES THE TARGET.

5.2-433

MIL-STD-6016B

TABLE J12-2. Required Word Sequences and Receipt/Compliance Values for
Mission Assignment Discrete Values (Sheet 7 of 7)

NOTES

- 1 The initial transmission of the message by a C² JU requires the receipt/compliance field set to the value in the column. NonC² JUs on ASO missions may transmit R/C values of 0, 1, or 5.
- 2 The message priority is as indicated in the column. P = Priority, R = Routine.
- 3 The J12.6 Target Sorting Message may be used by the C² unit to update the position specified in the J12.0 message. Such transmissions may be initiated automatically or by operator action.
- 4 The J12.0C2 word shall be transmitted if Course, Speed, or Altitude about the Objective TN is available.
- 5 The J12.0C5 word shall be transmitted when the target is a Line of Bearing (J12.0C3 word, Point Type, 1 value 15).

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J12.0I

WORD TITLE: MISSION ASSIGNMENT INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13:	12	11	10:	09	08	07:	06	05	04	03	02:	01	00:				
TRACK NUMBER, ADDRESSEE												:	MESSAGE	:	SUBLABEL,	:							:	WORD	:			
												:	LENGTH	:	J-SERIES	:	LABEL, J-SERIES						:	FORMAT	:			
												:	INDICATOR	:							:		:					
15												:	3	:	3	:	5						:	2	:			
49	48	47	46	45	44	43	42	41	40	39:	38	37:	36	35	34:	33	32	31	30	29	28:	27	26	25				
TRACK NUMBER, OBJECTIVE												:	DUD	:	DISUSED	:	MISSION ASSIGNMENT						:					
												:		:		:	DISCRETE						:	---				
												:		:		:							:					
19												:	2	:	3	:	6						:					
					:	69	68	67	66:	65	64	63	62	61:	60	59	58:	57	56	55	54	53	52	51	50			
					:	RECURRENCE					:						:	THREAT					:					
					:	RATE, RECEIPT/					:	RECEIPT/COMPLIANCE					:	WARNING					:	---				
					:	COMPLIANCE					:						:	ENVIRONMENT:					:					
					:	4					:	5					:	3					:					

WORD DESCRIPTION

WORD NUMBER: J12.0I

WORD TITLE: MISSION ASSIGNMENT INITIAL WORD

REFERENCE			BIT	#	
DFI/DUI	DATA FIELD	DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD	FORMAT	0-	1 2	00
270 004	LABEL,	J-SERIES	2-	6 5	01100
271 005	SUBLABEL,	J-SERIES	7-	9 3	000
800 001	MESSAGE	LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
769 006	TRACK	NUMBER, ADDRESSEE	13-	27 15	
1626 001	MISSION	ASSIGNMENT DISCRETE	28-	33 6	
758 003	DISUSED		34-	36 3	
758 002	DISUSED	(DUD)	37-	38 2	
769 010	TRACK	NUMBER, OBJECTIVE	39-	57 19	
814 001	THREAT	WARNING ENVIRONMENT	58-	60 3	
392 008	RECEIPT/	COMPLIANCE	61-	65 5	
444 025	RECURRENCE	RATE, RECEIPT/ COMPLIANCE (RRN R/C)	66-	69 4	

FIELD CODING FOR J12.0I

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	006	TRACK NUMBER, ADDRESSEE -----		THE TN OF A UNIT (I.E., JU OR PU) TO WHICH A MESSAGE IS ADDRESSED.
		NO STATEMENT NUMERIC	0 00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		ILLEGAL NUMERIC	00077 (OCTAL) 00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC	00177 (OCTAL)	COLLECTIVE ADDRESS.
		NUMERIC	00200 THROUGH 07776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL NUMERIC	07777 (OCTAL) 10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
1626	001	MISSION ASSIGNMENT DISCRETE -----		SPECIFIES WHAT MISSION IS TO BE PERFORMED.
		NO STATEMENT	0	
		REFUEL	1	
		ORBIT	2	
		RECALL	3	
		RETURN TO BASE	4	
		ENGAGE	5	
		PRIORITY KILL	6	
		BREAK ENGAGEMENT	7	
		INVESTIGATE/INTERROGATE	8	
		CLEAR TO DROP	9	
		CEASE/DO NOT DROP	10	
		INTERVENE	11	
		DIVERT	12	
		AIR-TO-SURFACE	13	
		AIR-TO-AIR	14	
		SEARCH AND RESCUE	15	
		COMBAT AIR PATROL	16	
		PRECISION BOMBING	17	

5.2-438

MIL-STD-6016B

FIELD CODING FOR J12.0I

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1626	001	MISSION ASSIGNMENT DISCRETE	(CONTINUED)	

		LASER DESIGNATION	18	
		BEACON BOMBING	19	
		CLOSE AIR SUPPORT	20	
		INTERDICTION	21	
		AERIAL RECONNAISSANCE	22	
		ESCORT	23	
		SHADOW	24	
		WEAPONS FREE	25	
		WEAPONS TIGHT	26	
		SALVO/CLEAR AIRCRAFT	27	
		ALERT CONDITION WHITE	28	
		ALERT CONDITION YELLOW	29	
		ALERT CONDITION RED	30	
		COVER	31	
		VISUAL IDENTIFICATION	32	
		DISUSED	33	
		GO TO VOICE	34	
		HIGH INTEREST TRACK	35	
		DESIGNATION		
		CANCEL HIGH INTEREST	36	
		TRACK DESIGNATION		
		SENSOR TARGET REPORTS ON	37	
		SENSOR TARGET REPORTS	38	
		OFF		
		SUPPRESSION OF ENEMY AIR	39	
		DEFENSES		
		ARMED RECONNAISSANCE	40	
		ATTACK	41	
		CEASE ATTACK	42	
		RELATED MISSION DATA	43	
		COUNTER AIR ATTACK	44	
		FIGHTER SWEEP	45	
		CEASE FIRE	46	
		HOLD FIRE	47	
		UNDEFINED	48 THROUGH 62	
		CEASE MISSION	63	
769	010	TRACK NUMBER, OBJECTIVE		

THE TN OF THE OBJECT OF THE ACTION
DESCRIBED IN THE MESSAGE.
THE NINETEEN BITS OF THIS TN ARE
DIVIDED INTO FIVE GROUPS
CONSISTING OF TWO FIVE-BIT GROUPS
AND THREE THREE-BIT GROUPS. EACH

5.2-439

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	010	TRACK NUMBER, OBJECTIVE -----	(CONTINUED)	

FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE-BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANNN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6
00111	7
01000	A
01001	B
01010	C
01011	D
01100	E
01101	F
01110	G
01111	H
10000	J
10001	K
10010	L
10011	M
10100	N

FIELD CODING FOR J12.0I

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	010	TRACK NUMBER, OBJECTIVE -----	(CONTINUED)	
				10101 P
				10110 Q
				10111 R
				11000 S
				11001 T
				11010 U
				11011 V
				11100 W
				11101 X
				11110 Y
				11111 Z
		00000	0	NO STATEMENT.
		00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU). ILLEGAL.
		00077	63	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU). RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS. COLLECTIVE ADDRESS.
		00100-00175	64 THROUGH 125	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		00176	126	ILLEGAL.
		00177	127	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		00200-07776	128 THROUGH 4094	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		07777	4095	ILLEGAL.
		0A000-0Z777	4096 THROUGH 16383	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		10000-17777	16384 THROUGH 20479	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		20000-27777	32768 THROUGH 36863	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G.,

5.2-441

MIL-STD-6016B

FIELD CODING FOR J12.0I

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	010	TRACK NUMBER, OBJECTIVE -----	(CONTINUED)	
		2A000-2Z777	36864 THROUGH 49151	TRACKS AND REFERENCE POINTS. ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		70000-77776	114688 THROUGH 118782	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO

5.2-442

MIL-STD-6016B

FIELD CODING FOR J12.0I

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	010	TRACK NUMBER, OBJECTIVE -----	(CONTINUED)	
		77777	118783	C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS. ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
814	001	THREAT WARNING ENVIRONMENT -----		DESCRIBES THE ENVIRONMENT FROM WHICH A THREAT CAN BE EXPECTED.
		NO STATEMENT	0	
		AIR	1	
		SURFACE (MARITIME)	2	
		MINES	3	
		SUBSURFACE (MARITIME)	4	
		LAND (GROUND)	5	
		SPACE	6	
		UNDEFINED	7	
392	008	RECEIPT/COMPLIANCE -----		
		ORIGINAL ORDER	0	RECEIPT/COMPLIANCE RESPONSE REQUIRED.
		ORIGINAL ORDER	1	RECEIPT/COMPLIANCE RESPONSE NOT REQUIRED. MUST BE USED IN CONJUNCTION WITH ORIGINAL ORDER MESSAGES ADDRESSED TO COLLECTIVE ADDRESSES. THE ORIGINAL ORDER SHALL BE TRANSMITTED 3 TIMES.
		MACHINE RECEIPT	2	MESSAGE RECEIVED ERROR FREE.
		WILCO (WILL COMPLY)	3	THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER WILL COMPLY. IN THIS USAGE, THE SYSTEM COMPONENT IS A HUMAN OPERATOR OR (UNMANNED VEHICLE ONLY) A MACHINE.
		HAVCO (HAVE COMPLIED)	4	THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER HAS COMPLIED. IN THIS USAGE, THE SYSTEM COMPONENT MAY BE A HUMAN OPERATOR OR A MACHINE.
		ORIGINAL ORDER	5	RECEIPT/COMPLIANCE RESPONSE (MR AND/

5.2-443

MIL-STD-6016B

FIELD CODING FOR J12.0I

(SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
		CANTCO (CANNOT COMPLY)	6	OR CANTPRO ONLY) REQUIRED. THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER CANNOT COMPLY. IN THIS USAGE, THE SYSTEM COMPONENT IS A HUMAN OPERATOR OR (UNMANNED VEHICLE ONLY) A MACHINE.
		CANTPRO (CANNOT PROCESS)	7	NON-SPECIFIC SYSTEM LIMITATION OR CONFLICT. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	8	TIME SLOT ASSIGNMENT CONFLICT DETECTED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	9	CRYPTOVARIABLE NOT HELD. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	10	PARTICIPATION GROUP NOT DEFINED. THIS IS AN AUTOMATIC COMPUTER- GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	11	APPLICABLE ASSIGNMENT TABLE FULL. THIS IS AN AUTOMATIC COMPUTER- GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	12	RELAY FUNCTION SPECIFIED ALREADY HAS ASSIGNED TIME SLOT BLOCKS FOR

5.2-444

MIL-STD-6016B

FIELD CODING FOR J12.0I

(SHEET 8)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
-----	-----	-----------------------------	-------------	--

		CANTPRO (CANNOT PROCESS)	13	
--	--	--------------------------	----	--

		CANTPRO (CANNOT PROCESS)	14	
--	--	--------------------------	----	--

		CANTPRO (CANNOT PROCESS)	15	
--	--	--------------------------	----	--

		CANTPRO (CANNOT PROCESS)	16	
--	--	--------------------------	----	--

		CANTPRO (CANNOT PROCESS)	17	
--	--	--------------------------	----	--

WHICH A DIFFERENT RELAY MODE/NET NUMBER HAS BEEN SPECIFIED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.

INTERFERENCE PROTECTION FEATURES WOULD BE VIOLATED BY ACCEPTANCE OF ASSIGNMENT. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.

HOST SUBSCRIBER INTERFACE IS INACTIVE AND MESSAGE IS NOT PROCESSED BY THE TERMINAL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.

TN, ADDRESSEE DOES NOT IMPLEMENT THE ACTION REQUESTED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.

ONE OR MORE TNS IN THE OM NOT HELD. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.

TN, REFERENCE OR TN, FRIENDLY WEAPON IS UNDER OWN UNIT CONTROL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO

5.2-445

MIL-STD-6016B

FIELD CODING FOR J12.0I

(SHEET 9)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
		CANTPRO (CANNOT PROCESS)	18	RESPONSE HAS BEEN GENERATED. UNIT NOT EXERCISING AIR CONTROL CAPABILITY. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	19	UNACCEPTABLE IDENTITY. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	20	ADDRESSEE TN IS INACTIVE. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	21	THE FORWARDING UNIT DID NOT RECEIVE A MACHINE RECEIPT FROM THE ADDRESSEE TN. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	22	TN, REFERENCE OR TN, FRIENDLY WEAPON IS NOT UNDER THIS UNIT'S CONTROL. THIS IS AN AUTOMATIC COMPUTER- GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		UNDEFINED NO STATEMENT	23 THROUGH 30 31	
444	025	RECURRENCE RATE, RECEIPT/ COMPLIANCE -----		IDENTIFIES THE TIME SLOT IN WHICH THE RECEIPT/COMPLIANCE FOR THE MESSAGE IS TO BE TRANSMITTED.
		NO STATEMENT	0	

5.2-446

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
444	025	RECURRENCE RATE, RECEIPT/ COMPLIANCE	(CONTINUED)	
		----- NUMERIC	1 THROUGH 15	THE NUMERIC VALUE FOR RECEIPT/ COMPLIANCE, SPECIFIED AS RECURRENCE RATE NUMBER, DEFINES THE NUMBER N OF CONSECUTIVE TIME SLOTS FROM THE ORIGINAL TRANSMISSION TO THE DONATED TIME SLOT: N=3X2 TO THE (15-RRN) POWER.

.....

WORD TITLE: TARGET POSITION CONTINUATION WORD

49:	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29:	28	27	26	25
<---	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
LATITUDE, 0.0103 MINUTE										INDEX NUMBER														
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
20										6														

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50
:																				
:	LONGITUDE, 0.0103 MINUTE																			
:																				
:	21																			

WORD DESCRIPTION

WORD NUMBER: J12.0C1

WORD TITLE: TARGET POSITION CONTINUATION WORD

REFERENCE			BIT	#	
DFI/DUI	DATA FIELD	DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD	FORMAT	0-	1 2	01
1551 001	CONTINUATION	WORD LABEL	2-	6 5	00001
386 013	STRENGTH		7-	10 4	
756 008	SPARE		11-	18 8	
275 004	ENVIRONMENT/CATEGORY	(ENV/CAT)	19-	21 3	
1864 001	ORIGIN OF INDEX NUMBER		22	1	
	(ORG INX)				
768 002	INDEX NUMBER		23-	28 6	
281 017	LATITUDE,	0.0103 MINUTE	29-	48 20	
282 013	LONGITUDE,	0.0103 MINUTE	49-	69 21	

FIELD CODING FOR J12.0C1

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
386	013	STRENGTH -----		EXPRESSES THE NUMBER OF ENTITIES REPRESENTED BY A SINGLE TRACK.
		NO STATEMENT	0	
		1 UNIT	1	
		2 UNITS	2	
		3 UNITS	3	
		4 UNITS	4	
		5 UNITS	5	
		6 UNITS	6	
		7 UNITS	7	
		8 UNITS	8	
		9 UNITS	9	
		10 UNITS	10	
		11 UNITS	11	
		12 UNITS	12	
		2 THROUGH 7 (FEW) UNITS	13	
		GREATER THAN 7 (MANY) UNITS	14	
		GREATER THAN 12 UNITS	15	
275	004	ENVIRONMENT/CATEGORY -----		IDENTIFIES THE ENVIRONMENT/CATEGORY OF A JTIDS/MIDS UNIT OR TRACK.
		NO STATEMENT/UNKNOWN	0	
		SPACE	1	
		AIR	2	
		SURFACE (MARITIME)	3	
		SUBSURFACE (MARITIME)	4	
		LAND (GROUND)	5	
		UNDEFINED	6 THROUGH 7	
1864	001	ORIGIN OF INDEX NUMBER -----		
		MESSAGE ORIGINATOR'S INDEX NUMBER	0	
		MESSAGE RECEIVER'S INDEX NUMBER	1	
768	002	INDEX NUMBER -----		
		NO STATEMENT	0	
		NUMERIC	1 THROUGH 63	A VALUE ASSIGNED BY THE ORIGINATOR TO DIFFERENTIATE AMONG SENSOR TARGET REPORTS.

5.2-450

MIL-STD-6016B

FIELD CODING FOR J12.0C1 (SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
281	017	LATITUDE, 0.0103 MINUTE -----		THE PRECISION IS APPROXIMATELY 63 FEET. IN 90/524,287 DEGREE INCREMENTS.
		0 DEGREES	0	
		+90/524,287 THROUGH +90 DEGREES NORTH	1 THROUGH 524287	
		NO STATEMENT	524288	
		-90 THROUGH -90/524,287 DEGREES SOUTH	524289 THROUGH 1048575	
282	013	LONGITUDE, 0.0103 MINUTE -----		THE PRECISION IS APPROXIMATELY 63 FEET. IN 180/1,048,575 DEGREE INCREMENTS.
		0 DEGREES	0	
		+180/1,048,575 THROUGH +180 DEGREES EAST	1 THROUGH 1048575	
		NO STATEMENT	1048576	
		-180 THROUGH -180/1,048,575 DEGREES WEST	1048577 THROUGH 2097151	

.....

WORD TITLE: TARGET DATA CONTINUATION WORD

24	23	22:	21	20	19:	18	17	16	15	14	13	12	11	10	09	08	07:	06	05	04	03	02:	01	00:				
<---			:	METHOD OF FIRE		:	SPARE												:	CONTINUATION WORD LABEL					:	WORD FORMAT		:
			:	3		:	12												:	5					:	2		:

49	48	47	46	45	44	43	42:	41	40	39	38	37	36	35	34	33	32	31:	30	29	28	27	26	25	
ALTITUDE, 100 FT								:	SPEED								:	COURSE							
11								:	11								:	9							

:	69:	68	67	66	65	64	63	62	61	60	59	58	57:	56:	55	54	53:	52	51	50			
:	:	SPACE SPECIFIC TYPE												:	:	IDENTITY		:					
:	:	AIR SPECIFIC TYPE												:	:			:					
:	:													:	:			:					
SI	:	SURFACE (MARITIME) SPECIFIC TYPE												EX	:			:					
IND	:	SUBSURFACE (MARITIME) SPECIFIC TYPE												IND	:	ID AMP	:	:	---->				
:	:													:	:	DESCR	:	:					
:	:	LAND (GROUND) SPECIFIC TYPE												:	:			:					
:	:													:	:			:					
:	:	SPARE												:	:			:					
:	1	:	12												:	1	:	3	:				

WORD DESCRIPTION

WORD NUMBER: J12.0C2

WORD TITLE: TARGET DATA CONTINUATION WORD

REFERENCE DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	00010
756 012	SPARE	7-	18 12	
1050 001	METHOD OF FIRE	19-	21 3	
371 015	COURSE	22-	30 9	
367 018	SPEED	31-	41 11	
365 034	ALTITUDE, 100 FT	42-	52 11	
376 007	IDENTITY	53-	55 3	
376 001	IDENTITY AMPLIFYING DESCRIPTOR (ID AMP DESCR)	53-	55 3	
385 003	EXERCISE INDICATOR (EX IND)	56	1	
749 002	SPACE SPECIFIC TYPE	57-	68 12	
804 001	AIR SPECIFIC TYPE	57-	68 12	
808 001	SURFACE (MARITIME) SPECIFIC TYPE	57-	68 12	
809 001	SUBSURFACE (MARITIME) SPECIFIC TYPE	57-	68 12	
810 001	LAND (GROUND) SPECIFIC TYPE	57-	68 12	
756 012	SPARE	57-	68 12	
1861 001	SPECIAL INTEREST INDICATOR (SI IND)	69	1	

FIELD CODING FOR J12.0C2 (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
756	012	SPARE -----		
1050	001	METHOD OF FIRE -----		PROVIDES THE PLANNED MOF FOR ENGAGEMENT OF TN OBJECTIVE BY TN SOURCE.
		NO STATEMENT	0	
		SINGLE SHOT	1	TARGET WILL BE ENGAGED WITH ONE SHOT.
		DUAL SHOT	2	TARGET WILL BE ENGAGED WITH TWO SHOTS.
		MULTIPLE SHOT	3	TARGET WILL BE ENGAGED WITH THREE OR MORE SHOTS.
		SHOOT-LOOK-SHOOT	4	TARGET WILL BE ENGAGED WITH ONE SHOT. IF ENGAGEMENT IS EVALUATED AS UNSUCCESSFUL, A SECOND SINGLE SHOT ENGAGEMENT IS INITIATED.
		UNDEFINED	5 THROUGH 7	
371	015	COURSE -----		INDICATES THE DIRECTION OF TRAVEL OF AN OBJECT IN DEGREES WITH RESPECT TO TRUE NORTH.
		0 THROUGH 359 DEGREES ILLEGAL	0 THROUGH 359	IN 1 DEGREE INCREMENTS.
		NO STATEMENT	360 THROUGH 510 511	
367	018	SPEED -----		THE RATE OF CHANGE OF POSITION.
		0 THROUGH 4092 DATA MILES PER HOUR	0 THROUGH 2046	EXPRESSES GROUND SPEED IN 2 DATA MILES PER HOUR INCREMENTS.
		NO STATEMENT	2047	
365	034	ALTITUDE, 100 FT -----		EXPRESSES ALTITUDE AS MEASURED OUT- WARD FROM THE EARTH AS A POSITIVE QUANTITY ABOVE MEAN SEA LEVEL (MSL) IN FEET.
		0 THROUGH 204,600 FT NO STATEMENT	0 THROUGH 2046 2047	IN 100 FT INCREMENTS.
376	007	IDENTITY -----		EXPRESSES THE STANDARD IDENTITY OF A TRACK.
		PENDING	0	A TRACK WHICH HAS NOT BEEN SUBJECTED TO THE IDENTIFICATION PROCESS.
		UNKNOWN	1	AN EVALUATED TRACK WHICH HAS NOT

5.2-454

MIL-STD-6016B

FIELD CODING FOR J12.0C2

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
376	007	IDENTITY -----	(CONTINUED)	
		ASSUMED FRIEND	2	BEEN IDENTIFIED. A TRACK WHICH IS ASSUMED TO BE A FRIEND BECAUSE OF ITS CHARACTERISTICS, BEHAVIOR, OR ORIGIN.
		FRIEND	3	A TRACK BELONGING TO A DECLARED FRIENDLY NATION.
		NEUTRAL	4	A TRACK WHOSE CHARACTERISTICS, BEHAVIOR, ORIGIN, OR NATIONALITY INDICATE THAT IT IS NEITHER SUPPORTING NOR OPPOSING FRIENDLY FORCES.
		SUSPECT	5	A TRACK WHICH IS POTENTIALLY HOSTILE BECAUSE OF ITS CHARACTERISTICS, BEHAVIOR, ORIGIN, OR NATIONALITY.
		HOSTILE	6	A TRACK DECLARED TO BELONG TO ANY OPPOSING NATION, PARTY, GROUP, OR ENTITY, WHICH BY VIRTUE OF ITS BEHAVIOR OR INFORMATION COLLECTED ON IT SUCH AS CHARACTERISTICS, ORIGIN OR NATIONALITY CONTRIBUTES TO THE THREAT TO FRIENDLY FORCES.
		UNDEFINED	7	
376	001	IDENTITY AMPLIFYING DESCRIPTOR -----		A DESCRIPTOR ADDING TO THE STANDARD IDENTITY OF A TRACK INVOLVED IN AN EXERCISE. THE STANDARD IDENTITY IS FRIEND.
		EXERCISE PENDING	0	
		EXERCISE UNKNOWN	1	
		EXERCISE ASSUMED FRIEND	2	
		EXERCISE FRIEND	3	
		EXERCISE NEUTRAL	4	
		JOKER	5	
		FAKER	6	
		UNDEFINED	7	
385	003	EXERCISE INDICATOR -----		INDICATES WHETHER OR NOT THE MESSAGE IDENTIFIES AN EXERCISE TRACK.
		NON-EXERCISE TRACK	0	
		EXERCISE TRACK OR UNIT	1	

5.2-455

MIL-STD-6016B

FIELD CODING FOR J12.0C2

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
749	002	SPACE SPECIFIC TYPE -----		THE SPECIFIC TYPE OF A POINT OR TRACK WITH AN ENVIRONMENT/CATEGORY OF SPACE.
		NO STATEMENT	0	
		FROG-7	1	
		HONEST JOHN	2	
		SAKR 80	3	
		SS-21 MOD 2	4	
		SS-21 MOD 3	5	
		HAFT-I	6	
		UNDEFINED	7 THROUGH 78	
		SHORT RANGE (0-65 DM)	79	
		ALACRAN	80	
		CHENG FENG	81	
		CONDOR	82	
		HAFT II	83	
		IRAN-130	84	
		LANCE	85	
		MB/EE-150	86	
		MB/EE-300	87	
		UNDEFINED	88	
		PRITHVI	89	
		SS-1B (SCUD-A)	90	
		SS-1C (SCUD-B)	91	
		SS-21 (SCARAB)	92	
		SS-300	93	
		B-610/CJS-98 (BG510)	94	
		NHK-I	95	
		NHK-II (HYON MU)	96	
		UNDEFINED	97 THROUGH 168	
		SHORT-MEDIUM RANGE (66-200 DM)	169	
		AL-HUSAYN	170	
		UNDEFINED	171	
		HAFT III	172	
		M-9	173	
		M-11	174	
		MB/EE-600	175	
		SCUD-C	176	
		SS-23 (SPIDER)	177	
		AL HUSSEIN	178	
		UNDEFINED	179 THROUGH 242	
		MEDIUM RANGE (201-400 DM)	243	
		AL-ABBAS	244	

5.2-456

MIL-STD-6016B

FIELD CODING FOR J12.0C2

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
749	002	SPACE SPECIFIC TYPE	(CONTINUED)	

		JERICH0-I	245	
		AL HIJARAN	246	
		SONDA IV	247	
		UNDEFINED	248 THROUGH 330	
		MEDIUM-EXTENDED RANGE	331	
		(401-600 DM)		
		AL-FATAH	332	
		BADR-2000	333	
		CONDOR II	334	
		CSS-1	335	
		MB/EE-1000	336	
		SKY HORSE	337	
		SS-12A (SCALEBOARD A)	338	
		SS-12B (SCALEBOARD B)	339	
		SS1000	340	
		TIEN MA	341	
		UNDEFINED	342 THROUGH 416	
		EXTENDED RANGE (601-800	417	
		DM)		
		ARNISTON	418	
		CAPRICORNIO	419	
		JERICH0 II	420	
		NODONG-1	421	
		SS-N-5 (SERB)	422	
		UNDEFINED	423 THROUGH 496	
		EXTENDED-LONG RANGE	497	
		(801-1000 DM)		
		AGNI	498	
		AL/ABED	499	
		CC-4 (SANDAL)	500	
		CSS-5	501	
		UNDEFINED	502 THROUGH 575	
		LONG RANGE (1001-1350	576	
		DM)		
		CHEVALINE	577	
		CSS-2	578	
		CSS-3	579	
		CSS-4	580	
		CSS-N-3	581	
		M-4 SLBM	582	
		M-5 SLBM	583	
		M-20 SLBM	584	
		MIDGETMAN	585	

5.2-457

MIL-STD-6016B

FIELD CODING FOR J12.0C2

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
749	002	SPACE SPECIFIC TYPE	(CONTINUED)	

		MINUTEMAN I	586	
		MINUTEMAN II	587	
		PEACEKEEPER	588	
		POLARIS A-3	589	
		POSEIDON C-3	590	
		SS-11 (SEGO)	591	
		SS-13 (SAVAGE)	592	
		SS-17 (SPANKER) MOD 1	593	
		SS-17 (SPANKER) MOD 2	594	
		SS-17 (SPANKER) MOD 3	595	
		SS-18 (SATAN) MOD 1	596	
		SS-18 (SATAN) MOD 2	597	
		SS-18 (SATAN) MOD 3	598	
		SS-20 (SABER)	599	
		SS-24 (SCALPEL)	600	
		SS-25 (SICKLE)	601	
		SS-N-6 (SAWFLY)	602	
		SS-N-8	603	
		SS-N-17 (SNIPE)	604	
		SS-N-18 (STINGRAY)	605	
		SS-N-20 (STURGEON)	606	
		SS-N-23 (SKIFF)	607	
		SSBS S-3	608	
		SSBS S-4	609	
		TRIDENT I (C-4)	610	
		TRIDENT II (D-5)	611	
		MODIFIED CSS-5	612	
		SS-19 MOD 3	613	
		UNDEFINED	614	
		NEW SOLID SLBM	615	
		CSS-NX-3	616	
		M4B	617	
		M45	618	
		UNDEFINED	619 THROUGH 786	
		>1350 DM	787	
		ABM-1B (GALOSH)	788	
		ARROW	789	
		ASTER	790	
		CORPS SAM	791	
		ERINT	792	
		HAWK	793	
		PATRIOT	794	
		SA-10 (GRUMBLE)	795	

5.2-458

MIL-STD-6016B

FIELD CODING FOR J12.0C2

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
749	002	SPACE SPECIFIC TYPE -----	(CONTINUED)	
		SA-12A (GLADIATOR)	796	
		SA-12B (GIANT)	797	
		SA-N-6 (GRUMBLE)	798	
		SH-08 (GAZELLE)	799	
		STANDARD MISSILE BLOCK IVA	800	
		THAAD	801	
		SM-2 BLOCK IV	802	
		SM-3 LEAP	803	
		UNDEFINED	804 THROUGH 876	
		INTERCEPTOR	877	
		OPERATIONAL COMMANDER DEFINED 1-64	878 THROUGH 941	
		UNDEFINED	942 THROUGH 1022	
		BALLISTIC MISSILE GENERAL	1023	
		UNDEFINED	1024 THROUGH 2046	
		SPACE GENERAL	2047	
		UNDEFINED	2048 THROUGH 4093	
		RESET TO NO STATEMENT	4094	
		UNDEFINED	4095	
804	001	AIR SPECIFIC TYPE -----		THE SPECIFIC TYPE OF POINT OR TRACK WITH AN ENVIRONMENT/CATEGORY OF AIR.
		NO STATEMENT	0	
		----- FIGHTER -----		
		F-4 PHANTOM II	1	
		F-5 TIGER II	2	
		F-8 CRUSADER	3	
		F-14 TOMCAT	4	
		F-15 EAGLE	5	
		F-16 FIGHTING FALCON	6	
		F-101 VOODOO	7	
		F-104 STARFIGHTER	8	
		F-105 THUNDERCHIEF	9	
		F-106 DELTA DART	10	
		F-111 (GENERAL DYNAMICS)	11	
		F/A-18 HORNET	12	

5.2-459

MIL-STD-6016B

FIELD CODING FOR J12.0C2

(SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		EFA	13	
		F-102	14	
		F-100	15	
		DISUSED	16	
		DISUSED	17	
		COMMANDO	18	
		DISUSED	19	
		DISUSED	20	
		J-35 DRAGEN	21	
		JAGUAR	22	
		SUPER ETENDARD	23	
		DISUSED	24 THROUGH 26	
		F-1 (MITSUBISHI)	27	
		F-35XD DRAGEN	28	
		DISUSED	29	
		HF-24 MARUT (WIND SPIRIT)	30	
		JA37 VIGGEN	31	
		DISUSED	32	
		SF-5 FREEDOM FIGHTER	33	
		IAR-91 ORAO	34	
		AJEET INVINCIBLE	35	
		KFIR C2	36	
		MIRAGE F1	37	
		MIRAGE 3	38	
		MIRAGE 5	39	
		MIRAGE 50	40	
		MIRAGE 2000	41	
		DISUSED	42	
		DISUSED	43	
		ALPHA JET	44	
		KEFIR	45	
		F-6 FARMER	46	
		F-8 FISHBED	47	
		F-9 FANTAN	48	
		F-12 (CHINA)	49	
		SU-7 FITTER	50	
		SU-9 FISHPOT	51	
		SU-11 FLAGON	52	
		SU-15 FLAGON	53	
		SU-17 FITTER	54	
		SU-19 FENCER	55	
		SU-20 FITTER	56	

FIELD CODING FOR J12.0C2

(SHEET 8)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	
		SU-22 FITTER	57	
		SU-24 FENCER	58	
		SU-25 FROGFOOT	59	
		TU-28 FIDDLER	60	
		TU-128 FIDDLER	61	
		MIG-21 FISHBED	62	
		MIG-23 FLOGGER	63	
		MIG-25 FOXBAT	64	
		MIG-27 FLOGGER	65	
		YAK-28 FIREBAR	66	
		YAK-36 FORGER	67	
		AAF "RAM-J"	68	
		MIG-15 FAGOT	69	
		MIG-17 FRESCO	70	
		MIG-19 FARMER	71	
		SU-27 FLANKER	72	
		MIG-29 FULCRUM	73	
		MIG-31 FOXHOUND	74	
		YAK-38 FORGER-A	75	
		F-22 RAPTOR	76	
		F-84 THUNDERSTREAK	77	
		F-86 SABRE	78	
		F/A2 SEA HARRIER	79	
		IDF CHING-KUO (TAIWAN)	80	
		JAS-39 GRIPPEN	81	
		JIAN JI-7	82	
		JIAN JI-8-2	83	
		JOINT STRIKE FIGHTER	84	
		KFIR C7	85	
		KFIR 2000	86	
		RAFALE	87	
		SU-30	88	
		SU-33 (SU-27K)	89	
		SU-34	90	
		SU-35	91	
		SU-37	92	
		SU-39	93	
		YAK-141 FREESTYLE	94	
		F-5 FRESCO	95	
		F-7 FISHBED	96	
		J-9	97	
		RT33	98	
		CF-188 HORNET	99	

FIELD CODING FOR J12.0C2 (SHEET 9)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		UNDEFINED	100	
		TORNADO F3	101	
		SEA HARRIER	102	
		F-5 NORTHROP	103	
		UNDEFINED	104 THROUGH 254	
		FIGHTER GENERAL	255	

		BOMBERS/ATTACK		

		A-4 SKYHAWK	256	
		A-6 INTRUDER	257	
		A-7 CORSAIR II	258	
		A-10 THUNDERBOLT II	259	
		A-37 DRAGONFLY	260	
		B-1 (ROCKWELL)	261	
		B-52 STRATOFORTRESS	262	
		AC-130 HERCULES	263	
		AV-8 HARRIER	264	
		F/A-18 HORNET	265	
		FB-111 (GENERAL DYNAMICS)	266	
		A-1	267	
		TA-28	268	
		DISUSED	269	
		AC-47	270	
		AC-119	271	
		AC-124	272	
		ALPHA JET	273	
		DISUSED	274 THROUGH 276	
		35XD DRAKEN	277	
		J-1 HAWK	278	
		J-1 JAESTREB	279	
		S-2	280	
		AJ37 VIGGEN	281	
		HA220 SUPER SAETA	282	
		M.B.326 (AERMACCHI)	283	
		M.B.339 (AERMACCHI)	284	
		SF 260 WARRIER	285	
		SK 60 (SAAB)	286	
		BAC 167 STRIKEMASTER	287	
		TORNADO GR-1 (IDS)	288	

FIELD CODING FOR J12.0C2 (SHEET 10)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		IL-28 BEAGLE	289	
		MI-4 BISON	290	
		TU-16 BADGER	291	
		TU-22 BLINDER	292	
		TU-22M BACKFIRE	293	
		TU-95 BEAR	294	
		TU-142 BEAR	295	
		YAK-28 BREWER	296	
		SUPER ENTENDARD	297	
		TU-160 BLACKJACK	298	
		AMX	299	
		FRS1 SEA HARRIER	300	
		FRS2 SEA HARRIER	301	
		FRS51 SEA HARRIER	302	
		F-117 NIGHTHAWK	303	
		G4 SUPER GALEB	304	
		G91Y	305	
		HAWK-2000	306	
		HAWK-100	307	
		HAWK-200	308	
		HAWK-50	309	
		HAWK-60	310	
		IA-58 PUCARA	311	
		IAR-93 ORAO	312	
		IAR-99 SOIM	313	
		JIAN JI-5M	314	
		A-5 FANTAN	315	
		L59 ALBATROS	316	
		B-2 SPIRIT	317	
		B-7 HONGZHA	318	
		1050E	319	
		A3 LEI MING	320	
		HARRIER GR4/7	321	
		TORNADO GR4	322	
		AV-8B HARRIER PLUS	323	
		CF-188 HORNET	324	
		RAFALE	325	
		UNDEFINED	326 THROUGH 510	
		BOMBER/ATTACK GENERAL	511	

FIELD CODING FOR J12.0C2

(SHEET 11)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	
		----- PATROL/RECON/ELECTRONIC/ TANKER/GENERAL -----		
		E-2 HAWKEYE	512	
		E-3 SENTRY (AWACS)	513	
		E-4 NEACP	514	
		EA-3	515	
		EA-6 PROWLER	516	
		EB-57 (DOUGLAS)	517	
		EC-130 HERCULES	518	
		EC-135 (BOEING)	519	
		EF-4 WILD WEASEL	520	
		EF-111 (GENERAL DYNAMICS)	521	
		EP-3 ORION	522	
		KA-3 (DOUGLAS)	523	
		KA-6 (GRUMMAN)	524	
		KC-10 EXTENDER	525	
		KC-130 HERCULES	526	
		KC-135 STRATOTANKER	527	
		O-1 BIRD DOG	528	
		O-2 (CESSNA)	529	
		OV-1 MOHAWK	530	
		OV-10 BRONCO	531	
		P-2 NEPTUNE	532	
		P-3 ORION	533	
		RC-130 HERCULES	534	
		RC-135 (BOEING)	535	
		RF-4 PHANTOM II	536	
		RF-5 (NORTHROP)	537	
		RF-8 CRUSADER	538	
		RF-14 TOMCAT	539	
		RF-104 STARFIGHTER	540	
		RP-3 ORION	541	
		RU-21 UTE	542	
		S-2 TRACKER	543	
		S-3 VIKING	544	
		SR-71 BLACKBIRD	545	
		U-2 (LOCKHEED)	546	
		U-4 AERO COMMANDER	547	
		U-5 H-500 TWIN	548	

FIELD CODING FOR J12.0C2

(SHEET 12)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		U-8 SEMINOLE	549	
		U-10 COURIER	550	
		UC-12 HURON	551	
		U-21 UTE	552	
		US-3 VIKING	553	
		OA-37 DRAGONFLY	554	
		TR-1	555	
		WC-130 HERCULES	556	
		E-1 TRACER	557	
		EB-66	558	
		EC-121	559	
		RA-3	560	
		SEA SCAN	561	
		FALCON 20 GUARDIAN	562	
		BR 1150 ATL1	563	
		RF-35XD DRAKEN	564	
		BN-2 MARITIME DEFENDER	565	
		DISUSED	566	THROUGH 567
		CP-140 AURORA	568	
		HS.748 COASTGUARDER	569	
		HS.801 NIMROD	570	
		DISUSED	571	
		MK.3	572	
		RJ-1 HAWK	573	
		RJ-1 JAESTREB	574	
		SS-2	575	
		PEACE SENTINEL	576	
		KC-97	577	
		AU-24	578	
		AU-23	579	
		U-21	580	
		U-17	581	
		HU-16	582	
		U-9	583	
		U-3	584	
		RU-21	585	
		NKC-135	586	
		RF-101	587	
		RF-111	588	
		RB-57	589	
		RB-66	590	
		RC-121	591	
		BE-12 MAIL	592	

FIELD CODING FOR J12.0C2

(SHEET 13)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		IL-38 MAY	593	
		TU-126 MOSS	594	
		BE-6	595	
		VC-10 (TANKER)	596	
		AN-12 CUB-A (ELINT)	597	
		AN-12 CUB-C (EA)	598	
		AN-12 CUB-D (EA)	599	
		IL-20 COOT-A (ELINT)	600	
		IL-76 MAINSTAY	601	
		E-8 (J STARS)	602	
		TORNADO ECR	603	
		E-6 MERCURY	604	
		EMB-111	605	
		MU-2S	606	
		A40 ALBATROS	607	
		BE42 ALBATROS	608	
		CL215 AMPHIBIAN	609	
		IAI 1125	610	
		IL22 COOT B	611	
		J32 LANSEN	612	
		SH5 HARBIN	613	
		TIER1	614	
		TIER2	615	
		TIER3	616	
		US1 (SHIN)	617	
		C-212 CASA	618	
		CESSNA 550 CITATION II	619	
		CESSNA 560 CITATION V	620	
		CL 215 CANADAIR	621	
		DORNIER 27	622	
		F-27 FOKKER	623	
		NIMROD MRA4	624	
		CP-140A AURORA/ARCTURUS	625	
		RC-135 RIVET JOINT	626	
		ATL 2	627	
		ETENDARD IV P	628	
		ALIZE	629	
		FALCON 50	630	
		MIRAGE IV	631	
		MIRAGE 2000	632	
		BR 1150 GE ATL ASW	633	
		BR 1150 GE ATL SIGINT	634	
		C-130 HERCULES TANKER	635	

FIELD CODING FOR J12.0C2 (SHEET 14)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		ASTOR	636	
		UNDEFINED	637 THROUGH 761	
		TANKER	762	
		RECONNAISSANCE (RECON)	763	
		ELECTRONIC WARFARE (EW)	764	
		ASW	765	
		AEW AND C	766	
		MISCELLANEOUS GENERAL	767	

		TRAINER		

		T-2 BUCKEYE	768	
		T-28 TROJAN	769	
		T-29 (CONVAIR)	770	
		T-34 MENTOR	771	
		T-37 TWEET	772	
		T-38 TALON	773	
		T-39 SABERLINER	774	
		T-41 MESCALERO	775	
		T-42 CONCHISE	776	
		T-43 (BOEING)	777	
		T-44 KING AIR	778	
		TA-4 SKYHAWK	779	
		TA-7 CORSAIR II	780	
		T-33	781	
		ALPHA JET	782	
		B3LA (SAAB)	783	
		C-101 AVIOJET	784	
		G2-A GALEB	785	
		G2-A SEAGULL	786	
		L-29 DELFIN	787	
		L-29 MAYA	788	
		L-39 ALBATROS	789	
		L-70 MILTRAINER	790	
		L-450	791	
		P.55 (PARTENAVIA)	792	
		T-2 (MITSUBISHI)	793	
		CM 170 MAGISTER	794	
		M.B.339 (AERMACCHI)	795	
		T-2 (MITSUBISHI)	796	
		CM AU/ MAGISTER	797	

FIELD CODING FOR J12.0C2

(SHEET 15)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		M.B.339 (AERMACCHI)	798	
		SF-260 (SIAI-MARCHETTI)	799	
		SH 37 VIGGEN	800	
		QH-50 DRAGEN	801	
		SK 37 VIGGEN	802	
		SK 60 (SAAB)	803	
		TB30 EPSILON	804	
		TF-35XD	805	
		TJ-1 HAWK	806	
		TJ-1 JASTRAEB	807	
		TS.11 SPARK	808	
		AW1-2 FAN TRAINER	809	
		DISUSED	810	
		HJT-16 KIRAN	811	
		MBB223 FLAMINGO	812	
		SU-11 MAIDEN	813	
		SU-15	814	
		MIG-15 MIDGET	815	
		MIG-17	816	
		MIG-21 MONGOL	817	
		MIG-23	818	
		MIG-25	819	
		YAK-11 MOOSE	820	
		YAK-18 MAX	821	
		YAK-28 MAESTRO	822	
		TF-104 STARFIGHTER	823	
		T-46A	824	
		EMB-312 TOUCAN	825	
		T-45 GOSHAWK	826	
		T-47	827	
		AS202	828	
		CT114 TUTOR	829	
		G91T (FIAT JET 1)	830	
		K8 (NAMC)	831	
		L70 VINKA	832	
		STRIKEMASTER (BAE)	833	
		T1 JAYHAWK	834	
		T4 (KAWASAKI)	835	
		CT-142 DASH 8	836	
		B-55 BARON	837	
		F-33 BONANZA	838	
		839 PILLAN-TAMIZ	839	
		CT-133 SILVERSTAR	840	

5.2-468

MIL-STD-6016B

FIELD CODING FOR J12.0C2 (SHEET 16)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		UNDEFINED	841 THROUGH 1022	
		TRAINER GENERAL	1023	

		TRANSPORT/AIRLINER		

		C-1 (GRUMMAN COD)	1024	
		C-2 GREYHOUND	1025	
		C-5 GALAXY	1026	
		C-7 CARIBOU	1027	
		C-9 NIGHTINGALE	1028	
		C-12 HURON	1029	
		C-123 PROVIDER	1030	
		C-130 HERCULES	1031	
		C-135 STRATOLIFTER	1032	
		C-140 JETSTAR	1033	
		C-141 STARLIFTER	1034	
		HC-130 HERCULES	1035	
		VC-6 KING AIR	1036	
		VC-9 SKYTRAIN II	1037	
		VC-11 GULFSTREAM	1038	
		VC-137 (BOEING)	1039	
		707 (BOEING)	1040	
		720 (BOEING)	1041	
		727 (BOEING)	1042	
		737 (BOEING)	1043	
		747 (BOEING)	1044	
		757 (BOEING)	1045	
		767 (BOEING)	1046	
		L-100 HERCULES	1047	
		L-1011 TRI STAR	1048	
		DC-8 (DOUGLAS)	1049	
		DC-9 (DOUGLAS)	1050	
		DC-10 (DOUGLAS)	1051	
		C-119	1052	
		DC-130	1053	
		HC-97	1054	
		C-JM	1055	
		C-54	1056	
		C-97	1057	
		C-118	1058	
		C-119	1059	

FIELD CODING FOR J12.0C2

(SHEET 17)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		C-121	1060	
		C-124	1061	
		C-131	1062	
		C-133	1063	
		VC-47	1064	
		CV-54	1065	
		CV-140	1066	
		ARAVA	1067	
		CONCORDE	1068	
		ISLANDER	1069	
		SKYVAN	1070	
		TRIDENT	1071	
		A300 AIRBUS	1072	
		A310 AIRBUS	1073	
		C-1 (KAWASKI)	1074	
		C-160 TRANSALL	1075	
		C.207 AZOR	1076	
		C-212 AVIOCAR	1077	
		F27 FRIENDSHIPS	1078	
		F28 FELLOWSHIP	1079	
		G222 SAMA	1080	
		AW.660 ARGOSY	1081	
		BAC111 ONE-ELEVEN	1082	
		DHC-5 BUFFALO	1083	
		DHC-7 DASH	1084	
		AN-2 COLT	1085	
		AN-10 CAT	1086	
		AN-12 CUB	1087	
		AN-14 CLOD	1088	
		AN-22 COCK	1089	
		AN-24 COKE	1090	
		AN-26 CURL	1091	
		AN-28 CASK	1092	
		AN-30 CLANK	1093	
		AN-32 CLINE	1094	
		AN-40 (VERY LARGE TURBO-PROP)	1095	
		AN-72 COALER	1096	
		IL-12 COACH	1097	
		IL-18 COOT	1098	
		IL-62 CLASSIC	1099	
		IL-76 CANDID	1100	
		IL-86 CAMBER	1101	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		TU-114 CLEAT	1102	
		TU-134 CRUSTY	1103	
		TU-144 CHARGER	1104	
		TU-154 CARELESS	1105	
		YAK-40 CODDLING	1106	
		YAK-42 CLOBBER	1107	
		TU-104	1108	
		YAK-27	1109	
		IL-38	1110	
		DISUSED	1111	
		DO-228 LT (TRANSPORT)	1112	
		DISUSED	1113	
		AN-74	1114	
		AN-124 CONDOR	1115	
		A320 AIRBUS	1116	
		A321 AIRBUS	1117	
		A330 AIRBUS	1118	
		A340 AIRBUS	1119	
		AN-70	1120	
		AN-225 COSSACK	1121	
		BAE-125-600	1122	
		BAE146	1123	
		777 (BOEING)	1124	
		C-17 GLOBEMASTER III	1125	
		C-20 GULFSTREAM 3/4	1126	
		C-21 LEARJET 35	1127	
		C-22	1128	
		C-23 SHERPA/SHORTS 330	1129	
		C-26 METRO 3	1130	
		YS 11 (NAMC)	1131	
		CL-600 CHALLENGER	1132	
		CL-601 CHALLENGER	1133	
		CN-235M (AIRTECH)	1134	
		EMB-120 BRASILLIA ADV	1135	
		EMB-145 AMAZON	1136	
		IL-78 MIDAS	1137	
		MD-11	1138	
		MD-80	1139	
		MD-90	1140	
		PD-808	1141	
		TU-44	1142	
		V-22 OSPREY	1143	
		VC-25	1144	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		XC-2	1145	
		1124 (IAI)	1146	
		1900 (BEECH)	1147	
		330 (SHORTS)	1148	
		580 (CONVAIR)	1149	
		ATR42	1150	
		B55 BARON	1151	
		BN2 ISLANDER	1152	
		C46 COMMANDO	1153	
		CARAVELL (SUD)	1154	
		CC109 (CANADAIR)	1155	
		CHALLENGER (CANADAIR)	1156	
		DHC2	1157	
		DHC6 TWIN OTTER	1158	
		DHC8	1159	
		EMB110 BANDEIRANTE	1160	
		EMB121	1161	
		FALCON 200/FALCON 20	1162	
		FALCON 50	1163	
		FALCON 900	1164	
		FH227 FRIENDSHIP	1165	
		FOKKER 100	1166	
		FOKKER 50	1167	
		FOKKER 60	1168	
		FOKKER 70	1169	
		GROB G850	1170	
		GULFSTREAM 1	1171	
		GULFSTREAM 2	1172	
		JETSTREAM	1173	
		JETSTREAM 31	1174	
		KING AIR	1175	
		L410 TURBOJET	1176	
		LEARJET 23	1177	
		LEARJET 24	1178	
		LEARJET 25 (IMPROVED VER	1179	
		28)		
		LEARJET 35/36	1180	
		LEARJET 55 (IMPROVED VER	1181	
		28)		
		LEARJET 60	1182	
		MERLIN 2	1183	
		MERLIN 3	1184	
		MERLIN 4	1185	

FIELD CODING FOR J12.0C2

(SHEET 20)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		METRO 3	1186	
		SAAB 2000	1187	
		SAAB 340	1188	
		SABRELINER	1189	
		U6 BEAVER	1190	
		VISCOUNT	1191	
		W3 SOKOL	1192	
		Y11 (HAMC)	1193	
		Y12 (HAMC)	1194	
		Y5	1195	
		CC-115 BUFFALO	1196	
		CC-130 HERCULES	1197	
		CC-150 POLARIS	1198	
		C-235 CASA	1199	
		CC-138 TWIN OTTER	1200	
		DO-228 LM (POLLUTION CONTROL)	1201	
		UNDEFINED	1202 THROUGH 1277	
		LIGHT CIVIL	1278	
		TRANSPORT/AIRLINER	1279	
		GENERAL		

		HELICOPTERS		

		AH-1 COBRA	1280	
		AH-64 APACHE	1281	
		CH-3 (SIKORSKY)	1282	
		CH-46 (SEA KNIGHT)	1283	
		CH-47 CHINOOK	1284	
		CH-53 SEA STALLION	1285	
		CH-54 LARKE (SKYCRANE)	1286	
		EH-60 QUICK FOX	1287	
		HH-1 IROQUOIS	1288	
		HH-2 SEA SPRITE	1289	
		HH-3 JOLLY GREEN	1290	
		HH-52 (SIKORSKY)	1291	
		HH-53 (SIKORSKY)	1292	
		OH-6 (HUGHES)	1293	
		OH-58 KIOWA	1294	
		RH-3 SEA KING	1295	
		RH-53 (SIKORSKY)	1296	

5.2-473

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		SH-2 SEA SPRITE	1297	
		SH-3 SEA KING	1298	
		SH-60 SEA HAWK	1299	
		UH-1 IROQUOIS	1300	
		UH-2 SEA SPRITE	1301	
		UH-12 (HILLER)	1302	
		UH-46 (BOEING)	1303	
		UH-60 BLACK HAWK	1304	
		CH-2U	1305	
		HH-43	1306	
		A109 (AGUSTA)	1307	
		A129 MONGOOSE	1308	
		BO-105 (MBB)	1309	
		DISUSED	1310	
		CH-124 SEA KING	1311	
		DISUSED	1312	THROUGH 1314
		SA 315 LAMA	1315	
		DISUSED	1316	
		DISUSED	1317	
		SA 321 SUPER FRELON	1318	
		SA 330 PUMA	1319	
		SA 332 SUPER PUMA	1320	
		S 342 GAZELLE	1321	
		SA 350 ASTAR	1322	
		SA 360 DAUPHIN	1323	
		SA 361 DAUPHIN	1324	
		WG-13 LYNX	1325	
		WG-34 (WESTLAND)	1326	
		KA-18 HOG	1327	
		KA-20 HARP	1328	
		KA-25 HORMONE	1329	
		KA-26 HOODLUM	1330	
		MI-1 HARE	1331	
		MI-2 HOPLITE	1332	
		MI-4 HOUND	1333	
		MI-6 HOOK	1334	
		MI-8 HIP	1335	
		MI-10 HARKE	1336	
		MI-12 HOMER	1337	
		MI-14 HAZE	1338	
		MI-24 HIND	1339	
		MI-26 HALO	1340	
		CH-53E SUPER STALLION	1341	

FIELD CODING FOR J12.0C2

(SHEET 22)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		MH-53E SEA DRAGON	1342	
		HH-60 NIGHT HAWK	1343	
		HH-65A DOLPHIN	1344	
		KA-27 HELIX-A (ASW)	1345	
		KA-32 HELIX	1346	
		MI-17 HIP-H	1347	
		MI-28 HAVOC	1348	
		ECUREUIL/FENNEL/ESQILO	1349	
		KA-29 HELIX-B	1350	
		KA-50 HOKUM	1351	
		204 BELL	1352	
		205 BELL	1353	
		206 BELL	1354	
		214 BELL	1355	
		280 ENSTROM	1356	
		300 SCHWEIZER	1357	
		406 COMBAT SCOUT	1358	
		A 109 HIRUNDO	1359	
		A 129 MANGUSTA	1360	
		AH 6 CAYUSE	1361	
		ALOUETTE 2	1362	
		ALOUETTE 3	1363	
		AS 350 ECUREUIL	1364	
		AS 532 COUGAR	1365	
		AS 550 FENNEC	1366	
		AS 555 FENNEC	1367	
		AS 565 PANTHER	1368	
		CH 34 WESTLAND	1369	
		EH 101	1370	
		HAS 1 WASP	1371	
		KA-28 HELIX A	1372	
		MD 500 DEFENDER	1373	
		MI 22	1374	
		MI 25	1375	
		MI 35	1376	
		MI 9	1377	
		SA 341 GAZELLE	1378	
		SA 342 GAZELLE	1379	
		SA 365 DAUPHIN 2	1380	
		TS11 ISKRA	1381	
		WESSEX	1382	
		Z9 (HARBIN)	1383	
		CH-146 GRIFFON	1384	

FIELD CODING FOR J12.0C2

(SHEET 23)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		SEA KING AEW (SKW)	1385	
		EH 101 MERLIN	1386	
		AB-212 AUGUSTA BELL	1387	
		BO-105 BOLKOW	1388	
		CH-47 CHINOOK	1389	
		HUGHES 500	1390	
		HUGHES 3000	1391	
		SH-3D SIKORSKY	1392	
		SH-70L SIKORSKY	1393	
		CH-113 LABRADOR	1394	
		NH 90 (C2)	1395	
		NH 90 (RECCE)	1396	
		NH 90 (EW/SEAD)	1397	
		NH 90 (TRANSPORT)	1398	
		SEA LYNX MK88A	1399	
		SEA KING MK41 (KWS)	1400	
		TIGER (HAP)	1401	
		NH 90 (NAVY)	1402	
		TIGER (HAC)	1403	
		SA 341 GAZELLE CANON	1404	
		AS 532 COUGAR HORIZON	1405	
		AW-520 SAR CORMORANT	1406	
		UNDEFINED	1407 THROUGH 1534	
		HELICOPTER GENERAL	1535	

		AIR-AIR MISSILES		

		AIM-4A FALCON	1536	
		AIM-7 SPARROW	1537	
		AIM-9 SIDEWINDER	1538	
		AIM-54 PHOENIX	1539	
		AIM-2A GENIE	1540	
		AIM-120 AMRAAM	1541	
		ASLAM	1542	
		R.530	1543	
		R.550 MAGIC	1544	
		S.530 SUPER 530	1545	
		ASPIDER	1546	
		DISUSED	1547	
		SHAFRIR	1548	
		SKY FLASH	1549	

FIELD CODING FOR J12.0C2

(SHEET 24)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		DISUSED	1550	
		AA-2 ATOLL	1551	
		AA-3 ANAB	1552	
		AA-5 ASH	1553	
		AA-6 ACRID	1554	
		AA-7 APEX	1555	
		AA-8 APHID	1556	
		AAM	1557	
		AA-9 AMOS	1558	
		AA-XP-1/2	1559	
		AQM-34	1560	
		AQM-91	1561	
		BGM-34 FIREBEE/MQM34	1562	
		YQM-94	1563	
		YQM-98	1564	
		AIM-132 ASRAAM	1565	
		MICA	1566	
		PL-2A	1567	
		PL-5B	1568	
		PL-7	1569	
		PL-9	1570	
		PYTHON 3	1571	
		PYTHON 4	1572	
		AA-10 ALAMO	1573	
		AA-11 ARCHER	1574	
		AA-12 ADDER	1575	
		AA-1 ALKALI	1576	
		AAM-1	1577	
		UNDEFINED	1578 THROUGH 1790	
		AIR-TO-AIR MISSILE	1791	
		GENERAL		

		AIR-GROUND/GROUND-		
		GROUND MISSILES		

		AGM-45 SHRIKE	1792	
		AGM-65 MAVERICK	1793	
		AGM-69 SRAM	1794	
		AGM-78 STANDARD ARM	1795	
		AGM-84 HARPOON	1796	
		AGM-86 ALCM	1797	

5.2-477

MIL-STD-6016B

FIELD CODING FOR J12.0C2

(SHEET 25)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		AGM-88 HARM	1798	
		AGM-109 TOMAHAWK	1799	
		AM 39 EXOCET	1800	
		AGM-119 PENGUIN	1801	
		AS 11 KILTER	1802	
		AS 12 KEGLER	1803	
		AS 15 KENT	1804	
		AS 30	1805	
		DISUSED	1806	
		RB 05	1807	
		RB 08	1808	
		ADVANCED ASM	1809	
		AS-1 KENNEL	1810	
		AS-2 KIPPER	1811	
		AS-3 KANGAROO	1812	
		AS-4 KITCHEN	1813	
		AS-5 KELT	1814	
		AS-6 KINGFISH	1815	
		AS-7 KERRY	1816	
		DISUSED	1817	
		AS-10 KAREN	1818	
		AS-9 KYLE	1819	
		AS 34 KORMORAN	1820	
		ASM GABRIEL	1821	
		ASM SEA SKUA	1822	
		ASM SEA EAGLE	1823	
		ASMP	1824	
		AT-2 SWATTER	1825	
		AT-3 SAGGER	1826	
		AT-6 SPIRAL	1827	
		C-601	1828	
		C-611	1829	
		C-801	1830	
		C-802	1831	
		CSS-2	1832	
		CSS-3	1833	
		CSS-N-3	1834	
		CSS-X-4	1835	
		FL-2 SILKWORM	1836	
		FL-7	1837	
		HY-2	1838	
		HY-3	1839	
		M-9/11	1840	

5.2-478

MIL-STD-6016B

FIELD CODING FOR J12.0C2

(SHEET 26)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		WS-1	1841	
		AS-13 KINGBOLT	1842	
		AS-14 KEDGE	1843	
		AS-16 KICKBACK	1844	
		AS-17 KRYPTON	1845	
		AS-18 KAZOO	1846	
		AT-4 SPIGOT	1847	
		AT-5 SPANDREL	1848	
		AT-7 SAXHORN	1849	
		AT-10 STABBER	1850	
		AT-11 SNIPER	1851	
		AT-12	1852	
		AT-13	1853	
		AT-14	1854	
		FROG-7	1855	
		SS-1 SCUD	1856	
		SS-11 SEGO	1857	
		SS-13 SAVAGE	1858	
		SS-18 SATAN	1859	
		SS-19 STILETTO	1860	
		SS-24 SCALPEL	1861	
		SS-25 SICKLE	1862	
		SS-N-2 STYX	1863	
		SS-N-3 SHADDOCK	1864	
		SS-N-6 SERB	1865	
		SS-N-7 STARBRIGHT	1866	
		SS-N-8 SAWFLY	1867	
		SS-N-9 SIREN	1868	
		SS-N-12 SANDBOX	1869	
		SS-N-18 STINGRAY	1870	
		SS-N-19 SHIPWRECK	1871	
		SS-N-20 STURGEON	1872	
		SS-N-21 SAMPSON	1873	
		SS-N-22 SUNBURN	1874	
		SS-N-23 SKIFF	1875	
		SS-N-26	1876	
		AGNI	1877	
		PRITHVI	1878	
		TOW	1879	
		AGM-114 HELLFIRE	1880	
		MLRS	1881	
		HOT	1882	
		MILAN	1883	

5.2-479

MIL-STD-6016B

FIELD CODING FOR J12.0C2

(SHEET 27)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		TRIGAT	1884	
		OTOMAT	1885	
		RBS-15M	1886	
		ARMAT	1887	
		ALARM	1888	
		AGM-12 BULLPUP	1889	
		AGM-62A WALLEYE	1890	
		AGM-123A SKIPPER II	1891	
		APACHE (ASM)	1892	
		AS 8	1893	
		AT-1 SWATTER	1894	
		CAS1	1895	
		KH-41 MOSKIT	1896	
		MARTIN PESCADOR	1897	
		MAS1 CARCARA	1898	
		RB 04E	1899	
		STAR	1900	
		SEA INDIGO	1901	
		MM 38	1902	
		MM 40	1903	
		SM 39	1904	
		AS 34 KORMORAN II	1905	
		UNDEFINED	1906 THROUGH 2046	
		AIR-GROUND MISSILE	2047	
		GENERAL		

		SURFACE TO AIR MISSILES		

		FIM-92 STINGER	2048	
		NIM-23 HAWK	2049	
		MIM-42 REDEYE	2050	
		MIM-72 CHAPARRAL	2051	
		MIM-104 PATRIOT	2052	
		RIM-2 TERRIER	2053	
		RIM-7 SEA SPARROW	2054	
		RIM-8 TALOS	2055	
		RIM-24 TARTAR	2056	
		RIM-66 STANDARD MISSILE	2057	
		RIM-67 STANDARD MISSILE	2058	
		BLOWPIPE	2059	
		DISUSED	2060 THROUGH 2061	

5.2-480

MIL-STD-6016B

FIELD CODING FOR J12.0C2 (SHEET 28)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		SEA DART	2062	
		DISUSED	2063	
		SEA WOLF	2064	
		S 440 CROTALE EDIR	2065	
		RAPIER	2066	
		RBS-70 (SLM)	2067	
		DISUSED	2068	
		SAM ROLAND	2069	
		SA-2 GUIDELINE	2070	
		SA-3 GOA	2071	
		SA-4 GANEF	2072	
		SA-N-3 GOBLET	2073	
		SA-5 GAMMON	2074	
		SA-N-4 GECKO	2075	
		SA-6 GAINFUL	2076	
		SA-N-6 GRUMBLE	2077	
		SA-7 GRAIL	2078	
		SA-8 GECKO	2079	
		SA-9 GASKIN	2080	
		SA-10 GRUMBLE	2081	
		SA-11 GADFLY	2082	
		SA-12	2083	
		SA-13 GOPHER	2084	
		MISTRAL	2085	
		SA-N-7 GADFLY	2086	
		SA-N-8 GREMLIN	2087	
		SA-14 GREMLIN	2088	
		SA-16 GIMLET	2089	
		SA-X-17	2090	
		SA-N-5 GRAIL	2091	
		SA-N-11 GRISOM	2092	
		SA-12A GLADIATOR	2093	
		SA-12B GIANT	2094	
		SA-14 GREMLIN	2095	
		SA-15 GAUNTLET	2096	
		SA-17 GRIZZLY	2097	
		SA-N-12 GRIZZLY	2098	
		SA-18 GROUSE	2099	
		SA-19 GRISOM	2100	
		RIM-116 RAM	2101	
		ADATS	2102	
		JAVELIN	2103	
		STARBURST	2104	

5.2-481

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		STARSTREAK	2105	
		ASPID	2106	
		I-HAWK	2107	
		ROLAND II	2108	
		SM-2 BLOCK II	2109	
		SM-2 BLOCK III	2110	
		SM-2 BLOCK IIIA	2111	
		SM-2 BLOCK IIIB	2112	
		SM-2 BLOCK IV	2113	
		SM-2 BLOCK IVA	2114	
		SM-3 LEAP	2115	
		AKASH	2116	
		ANZA	2117	
		ANZA II	2118	
		CSA-1	2119	
		CSA-2	2120	
		CSA-4	2121	
		CSA-5	2122	
		FM-80	2123	
		HN-5	2124	
		NK-7	2125	
		NK-16	2126	
		PANTZYR	2127	
		RAPIER 2000/JERNAS	2128	
		RBS-90	2129	
		SAKR	2130	
		SAVA	2131	
		SHANINE	2132	
		SKYGUARD ASPID	2133	
		SPADA	2134	
		TAM SAM	2135	
		TIGERCAT	2136	
		VANGUARD	2137	
		SA-N-1 GOA	2138	
		SA-N-9 GAUNTLET	2139	
		SA-N-10	2140	
		ALBATROS/ASPID	2141	
		SM-1	2142	
		VT1 CROTALE	2143	
		MASURCA	2144	
		ASTER 15	2145	
		ASTER 30	2146	
		UNDEFINED	2147 THROUGH 4093	

FIELD CODING FOR J12.0C2

(SHEET 30)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE -----	(CONTINUED)	
		RESET TO NO STATEMENT	4094	
		SURFACE-TO-AIR MISSILE GENERAL	4095	
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----		THE SPECIFIC TYPE OF POINT OR TRACK WITH AN ENVIRONMENT/CATEGORY OF SURFACE (MARITIME).
		NO STATEMENT	0	
		CV GENERAL	1	
		CLEMENCEAU	2	
		ENTERPRISE	3	
		FORRESTAL	4	
		JOHN F KENNEDY	5	
		KITTY HAWK	6	
		MIDWAY	7	
		NIMITZ	8	
		CHARLES DE GAULLE	9	
		UNDEFINED	10 THROUGH 21	
		CVS GENERAL	22	
		DEDALO	23	
		MINAS GERAIS	24	
		VIKRANT	25	
		VEINTICINCO DE MAYO	26	
		VIRAAT	27	
		UNDEFINED	28 THROUGH 35	
		CVH GENERAL	36	
		GIUSEPPE GARIBALDI	37	
		INVINCIBLE	38	
		JEANNE D'ARC	39	
		KIEV	40	
		PRINCIPE DE ASTURIAS	41	
		UNDEFINED	42	
		KIEV (MODIFIED)	43	
		UNDEFINED	44 THROUGH 52	
		BB GENERAL	53	
		IOWA	54	
		UNDEFINED	55 THROUGH 64	
		CC GENERAL	65	
		SVERDLOV (MODIFIED)	66	
		UNDEFINED	67 THROUGH 76	
		CG GENERAL	77	
		ANDREA DORIA	78	
		BAINBRIDGE	79	

5.2-483

MIL-STD-6016B

FIELD CODING FOR J12.0C2

(SHEET 31)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		BELKNAP	80	
		CALIFORNIA	81	
		UNDEFINED	82	
		KARA	83	
		KIROV	84	
		KRESTA I	85	
		KRESTA II	86	
		KYNDA	87	
		LEAHY	88	
		LONG BEACH	89	
		SLAVA	90	
		TICONDEROGA	91	
		TRUXTUN	92	
		VIRGINIA	93	
		VITTORIO VENETO	94	
		UNDEFINED	95 THROUGH 118	
		CH GENERAL	119	
		MOSKVA	120	
		UNDEFINED	121 THROUGH 130	
		CA GENERAL	131	
		UNDEFINED	132	
		SVERDLOV	133	
		UNDEFINED	134 THROUGH 143	
		DD GENERAL	144	
		AKIZUKI	145	
		ALLEN M SUMNER	146	
		ALLEN M SUMNER FRAM II	147	
		ALMIRANTE	148	
		AMATSUKAZE	149	
		ANIMOSO	150	
		ANSHAN	151	
		ARLEIGH BURKE	152	
		ASAGARI	153	
		UNDEFINED	154	
		AUDACE	155	
		AYANAMI	156	
		DISUSED	157	
		CARPENTER FRAM I	158	
		CHARLES F ADAMS (MOD)	159	
		CHARLES F ADAMS	160	
		COONTZ	161	
		DISUSED	162 THROUGH 163	

5.2-484

MIL-STD-6016B

FIELD CODING FOR J12.0C2

(SHEET 32)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		UNDEFINED	164	
		FLETCHER	165	
		FORREST SHERMAN (MOD) & HULL	166	
		FRIESLAND	167	
		GEARING FRAM I	168	
		GEARING FRAM II	169	
		UNDEFINED	170	
		DISUSED	171	
		HARUNA	172	
		HATAKAZE	173	
		HATSUYUKI	174	
		IMPAVIDO	175	
		KANIN	176	
		KASHIN (MODIFIED)	177	
		KASHIN	178	
		KASHIN II	179	
		KIDD	180	
		UNDEFINED	181	
		KILDIN (MODIFIED)	182	
		KOTLIN	183	
		KOTLIN (MODIFIED)	184	
		LUDA (TYPE 051)	185	
		MEKO 360	186	
		MINEGUMO	187	
		PROJECT 15	188	
		ROBERT H SMITH	189	
		ROGER D LAURIA	190	
		SAM KOTLIN	191	
		SHIRANE	192	
		SKORY	193	
		SOVREMENYY	194	
		SPRUANCE	195	
		SUFFREN	196	
		TACHIKAZE	197	
		TAKATSUKI	198	
		TYPE 42	199	
		DISUSED	200	
		DISUSED	201	
		TYPE F-70 (AAW)	202	
		TYPE F-70 (ASW)	203	
		TYPE F-67	204	

5.2-485

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		UNDEFINED	205 THROUGH 206	
		TYPE T-53 (MODIFIED-ASW)	207	
		UNDEFINED	208	
		UDALOY	209	
		YAMAGUMO	210	
		Z	211	
		IROQUOIS	212	
		UNDEFINED	213 THROUGH 276	
		DE GENERAL	277	
		UNDEFINED	278	
		CASTLE	279	
		UNDEFINED	280 THROUGH 295	
		FF GENERAL	296	
		ALMIRANTE CLEMENTE	297	
		ALMIRANTE PEREIRA DA SILVA	298	
		ALPINO	299	
		DISUSED	300 THROUGH 301	
		BALEARES	302	
		BAPTISTA DE ANDRADE	303	
		UNDEFINED	304	
		BERK	305	
		BLACK SWAN	306	
		BROADSWORD (TYPE 22)	307	
		BRONSTEIN	308	
		BROOKE	309	
		CANNON	310	
		CHARLES LAWRENCE	311	
		CHENGDU	312	
		CHIKUGO	313	
		COMANDANTE JOAO BELO	314	
		UNDEFINED	315	
		CROSLEY	316	
		DEALEY	317	
		DESCUBIERTA	318	
		DUKE (TYPE 23)	319	
		DURANGO	320	
		EDSALL	321	
		GARCIA	322	
		GLOVER	323	
		GODAVARI	324	
		GRISHA I	325	

FIELD CODING FOR J12.0C2

(SHEET 34)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		GRISHA II	326	
		GRISHA III	327	
		UNDEFINED	328	
		GRISHA V	329	
		UNDEFINED	330	
		HVIDBJORNEN	331	
		ISHKARI	332	
		ISUZU	333	
		JACOB VAN HEEMSKERCK	334	
		JIANGDONG (TYPE 053J)	335	
		JIANGHU (TYPE 053H)	336	
		JIANGNAN	337	
		JOAO COUTINHO	338	
		KAREL DOORMAN	339	
		KNOX	340	
		DISUSED	341	
		KONI	342	
		KORTENAER	343	
		KRIVAK I	344	
		KRIVAK II	345	
		KRIVAK III	346	
		LA FAYETTE	347	
		DISUSED	348	
		LEOPARD	349	
		LUPU	350	
		M	351	
		DISUSED	352	
		MAESTRALE	353	
		MEKO 140 TYPE	354	
		MEKO 200 TYPE	355	
		MIRKA I	356	
		MIRKA II	357	
		NIELS JUEL	358	
		NITEROI	359	
		OLIVER HAZARD PERRY	360	
		OSLO	361	
		PEDER SKRAM	362	
		PETYA I (MODIFIED)	363	
		PETYA I	364	
		PETYA II (MODIFIED)	365	
		PETYA II	366	
		PETYA III	367	

5.2-487

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		UNDEFINED	368	
		DISUSED	369	
		RIGA	370	
		RIVER	371	
		BRANDENBURG (TYPE 123)	372	
		RUDDEROW	373	
		SACHSEN (TYPE 124)	374	
		SAVAGE	375	
		DISUSED	376	
		TROMP	377	
		TYPE A 69	378	
		TYPE F-2000S	379	
		UNDEFINED	380 THROUGH 381	
		YUBARI	382	
		BREMEN (TYPE 122)	383	
		CLAUDE JONES	384	
		FFG 7	385	
		HALIFAX	386	
		NAJIN	387	
		PRESIDENT	388	
		SANTA MARIA	389	
		VOSPER MK 5	390	
		VOSPERTHORNYCROFT MK 7	391	
		WIELINGEN	392	
		FLOREAL	393	
		COMMANDANT BORY	394	
		UNDEFINED	395 THROUGH 478	
		FS GENERAL	479	
		ALBATROS	480	
		AUK CLASS	481	
		DE CRISTOFARO	482	
		DISUSED	483	
		MINERVA	484	
		NANUCHKA I	485	
		NANUCHKA II	486	
		NANUCHKA III	487	
		DISUSED	488	
		PF-103	489	
		SAAR 5	490	
		SLEIPNER	491	
		TARANTUL I	492	
		TARANTUL II	493	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		DISUSED	494	
		WADI	495	
		UNDEFINED	496 THROUGH 517	
		LL GENERAL	518	
		UNDEFINED	519 THROUGH 528	
		LCC GENERAL	529	
		BLUE RIDGE	530	
		CAVEZZALE	531	
		UNDEFINED	532 THROUGH 540	
		LKA GENERAL	541	
		CHARLESTON	542	
		UNDEFINED	543 THROUGH 552	
		LFS GENERAL	553	
		UNDEFINED	554 THROUGH 563	
		LHA GENERAL	564	
		TARAWA	565	
		UNDEFINED	566 THROUGH 575	
		LHD GENERAL	576	
		WASP	577	
		UNDEFINED	578 THROUGH 587	
		LPA GENERAL	588	
		UNDEFINED	589 THROUGH 598	
		LPD GENERAL	599	
		AUSTIN	600	
		FEARLESS	601	
		IVAN ROGOV	602	
		UNDEFINED	603	
		RALEIGH	604	
		SAN GIORGIO	605	
		UNDEFINED	606 THROUGH 615	
		LPH GENERAL	616	
		IWO JIMA	617	
		UNDEFINED	618 THROUGH 627	
		LSD GENERAL	628	
		ANCHORAGE	629	
		ASHLAND	630	
		CABILDO	631	
		OURAGAN	632	
		FOUDRE	633	
		THOMASTON	634	
		WHIDBEY ISLAND	635	
		UNDEFINED	636 THROUGH 646	

FIELD CODING FOR J12.0C2

(SHEET 37)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		LSL GENERAL	647	
		SIR GERAINT	648	
		UNDEFINED	649 THROUGH 657	
		LSM GENERAL	658	
		ASHDOD	659	
		BATRAL	660	
		CAKABEY	661	
		EDIC I	662	
		EDIC II	663	
		LSM-1	664	
		MP-4	665	
		POLNOCHNY	666	
		POLOCHNY A	667	
		POLOCHNY B	668	
		POLOCHNY C	669	
		POLOCHNY D	670	
		YUDAO	671	
		YULIMG	672	
		BOUGAINVILLE	673	
		UNDEFINED	674 THROUGH 687	
		LST GENERAL	688	
		ALLIGATOR	689	
		ATSUMI	690	
		UNDEFINED	691	
		BROOKE MARINE 93M	692	
		CAKABEY NL-122	693	
		CNIM PS 700	694	
		DE SOTO COUNTY	695	
		DISUSED	696	
		HENGAM	697	
		LST 1-510	698	
		LST 511-1152	699	
		MIURA	700	
		NEWPORT	701	
		ROPUCHA	702	
		SARUCABEY	703	
		CNGF	704	
		OCEAN	705	
		ALBION	706	
		TERREBONNE PARISH	707	
		TOBRUK	708	
		UNDEFINED	709	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		YUKAN	710	
		UNDEFINED	711 THROUGH 730	
		LSV GENERAL	731	
		UNDEFINED	732 THROUGH 741	
		LC GENERAL	742	
		UNDEFINED	743 THROUGH 751	
		LCM GENERAL	752	
		CTM 1	753	
		HUNGNAM	754	
		LCM 1057/1058	755	
		LCM 6	756	
		LCM 8	757	
		T-4	758	
		TSAPLYA	759	
		LCM (TYPE 521)	760	
		UNDEFINED	761 THROUGH 772	
		LCP GENERAL	773	
		DISUSED	774	
		LCM 1031	775	
		LCM 1035/1036	776	
		LCM 1055/1056	777	
		NAMPO	778	
		UNDEFINED	779 THROUGH 788	
		LCPL GENERAL	789	
		UNDEFINED	790 THROUGH 799	
		LWC GENERAL	800	
		UNDEFINED	801 THROUGH 810	
		LCU GENERAL	811	
		BALIKPAPAN	812	
		BOMBARDA	813	
		BRAILA	814	
		LCU (TYPE 520)	815	
		DISUSED	816	
		DISUSED	817	
		DISUSED	818	
		DSM-501	819	
		HANCHON	820	
		HANTAE	821	
		KISHON	822	
		KVALSUND	823	
		LCT MK 5	824	
		LCT MK 6	825	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		LCU 501	826	
		MFP D-3	827	
		MZ	828	
		REINOYSUND	829	
		SMB-1	830	
		TU 57-M	831	
		US LCU 1466	832	
		VYDRA	833	
		YURA	834	
		UNDEFINED	835 THROUGH 866	
		LCVP GENERAL	867	
		UNDEFINED	868 THROUGH 877	
		LCAC GENERAL	878	
		AIST	879	
		GUS	880	
		LEBED	881	
		UTENOK	882	
		WELLINGTON BH-7 MK 4	883	
		WELLINGTON BH-7 MK 5	884	
		WINCHESTER (SR.N6)	885	
		UNDEFINED	886 THROUGH 896	
		MM GENERAL	897	
		ALESHA	898	
		ALVSBORG	899	
		BORGEN	900	
		CARLSKRONA	901	
		COSAR	902	
		FALSTER	903	
		FURUSUND (MUL-20)	904	
		LANGELAND	905	
		LINDORMEN	906	
		LSM-1 (MODIFIED)	907	
		MUL-11	908	
		MUL-12	909	
		DISUSED	910	
		SMITH	911	
		US YMP	912	
		VIDAR	913	
		UNDEFINED	914 THROUGH 935	
		MCS GENERAL	936	
		UNDEFINED	937 THROUGH 946	
		MCJ GENERAL	947	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		UNDEFINED	948 THROUGH 957	
		MCD GENERAL	958	
		KINGSTON	959	
		MUEHLHAUSEN MCD (TYPE 742A)	960	
		UNDEFINED	961 THROUGH 968	
		MCM GENERAL	969	
		UNDEFINED	970 THROUGH 979	
		MH GENERAL	980	
		UNDEFINED	981 THROUGH 990	
		MHO GENERAL	991	
		UNDEFINED	992 THROUGH 1001	
		MHC GENERAL	1002	
		ADJUTANT (MODIFIED)	1003	
		AGGRESSIVE	1004	
		CIRCE	1005	
		WEIDEN MHC (TYPE 332)	1006	
		KOBLENZ MHC (TYPE 331B)	1007	
		HAM	1008	
		HUNT	1009	
		LANDSORT	1010	
		LERICI	1011	
		MSC 50	1012	
		MSO 218	1013	
		MSO 503	1014	
		SAUDA	1015	
		SIRIUS	1016	
		DISUSED	1017	
		TRIPARTITE	1018	
		VANYA I	1019	
		SANDOWN (SRMH)	1020	
		UNDEFINED	1021 THROUGH 1029	
		MHSC GENERAL	1030	
		MARS	1031	
		UNDEFINED	1032 THROUGH 1043	
		MHI GENERAL	1044	
		BAY	1045	
		UNDEFINED	1046 THROUGH 1054	
		MHA GENERAL	1055	
		UNDEFINED	1056 THROUGH 1065	
		ML GENERAL	1066	
		UNDEFINED	1067 THROUGH 1076	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		MLC GENERAL	1077	
		CURLEW	1078	
		UNDEFINED	1079 THROUGH 1088	
		MLI GENERAL	1089	
		UNDEFINED	1090 THROUGH 1099	
		MLO GENERAL	1100	
		UNDEFINED	1101 THROUGH 1110	
		MLR GENERAL	1111	
		UNDEFINED	1112 THROUGH 1121	
		MLA GENERAL	1122	
		UNDEFINED	1123 THROUGH 1132	
		MLS GENERAL	1133	
		UNDEFINED	1134 THROUGH 1143	
		MS GENERAL	1144	
		UNDEFINED	1145 THROUGH 1154	
		MSF GENERAL	1155	
		EX-ERIMO	1156	
		K-8	1157	
		KROGULEC	1158	
		M-40	1159	
		MSO-421	1160	
		NATYA I	1161	
		NATYA II	1162	
		RIVER	1163	
		T-43	1164	
		YURKA	1165	
		UNDEFINED	1166 THROUGH 1180	
		MSO GENERAL	1181	
		ACME	1182	
		AGGRESSIVE	1183	
		UNDEFINED	1184 THROUGH 1193	
		MSC GENERAL	1194	
		136 FT	1195	
		ADJUTANT	1196	
		ARKOE	1197	
		BAY	1198	
		DOKKUM	1199	
		HATSUSHIMA	1200	
		HAYASE	1201	
		DISUSED	1202	
		KOUZJ	1203	
		LENIWKA	1204	

FIELD CODING FOR J12.0C2

(SHEET 42)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		HAMELN MSC (TYPE 343)	1205	
		MSC 268	1206	
		MSC 292	1207	
		MSC 294	1208	
		NOTEC	1209	
		SASHA	1210	
		SAUDA	1211	
		DISUSED	1212	
		DISUSED	1213	
		SONYA	1214	
		T-301	1215	
		T-43	1216	
		TAKAMI	1217	
		DISUSED	1218	
		VANYA	1219	
		VANYA I	1220	
		VANYA II	1221	
		WUSONG	1222	
		ZHENYA	1223	
		UNDEFINED	1224 THROUGH 1263	
		MSI GENERAL	1264	
		DISUSED	1265	
		AUX MINESWEEPER NO 1	1266	
		CAPE	1267	
		FRAUENLOB (TYPE 394)	1268	
		HAM	1269	
		HERSTAL	1270	
		KIISKI	1271	
		KUHA	1272	
		M-111	1273	
		M-15	1274	
		M-31	1275	
		M-43/47	1276	
		PIPA-A	1277	
		WOCHANG	1278	
		YEVGENYA	1279	
		YUKTO	1280	
		UNDEFINED	1281 THROUGH 1302	
		MSR GENERAL	1303	
		UNDEFINED	1304 THROUGH 1313	
		MSB GENERAL	1314	
		K-8	1315	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		N-300	1316	
		NESTIN	1317	
		NØ. 7	1318	
		OLYA	1319	
		PO-2	1320	
		TR-40	1321	
		VD-141	1322	
		VULCAIN	1323	
		STYX	1324	
		PLUTON	1325	
		ACHERON	1326	
		UNDEFINED	1327 THROUGH 1334	
		MSA GENERAL	1335	
		UNDEFINED	1336 THROUGH 1345	
		MSD GENERAL	1346	
		HFG-1 (TROIKA)	1347	
		ILYUSHA	1348	
		UNDEFINED	1349 THROUGH 1358	
		MCSD GENERAL	1359	
		UNDEFINED	1360 THROUGH 1369	
		MSS GENERAL	1370	
		ANDRYUSHA	1371	
		BALTIKA	1372	
		POLNOCNY	1373	
		UNDEFINED	1374 THROUGH 1383	
		MSH GENERAL	1384	
		UNDEFINED	1385 THROUGH 1394	
		MSO GENERAL	1395	
		BERLAIMONT (MODIFIED)	1396	
		UNDEFINED	1397 THROUGH 1405	
		MSHC GENERAL	1406	
		HUNT	1407	
		TRIPARTITE	1408	
		WILTON	1409	
		UNDEFINED	1410 THROUGH 1419	
		PP GENERAL	1420	
		AB 25	1421	
		UNDEFINED	1422	
		BALDER	1423	
		CASTLE	1424	
		ISLAND	1425	
		KRONSHTADT	1426	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		PC-1638	1427	
		UNDEFINED	1428	THROUGH 1438
		PG GENERAL	1439	
		BESKYTTEVREN	1440	
		BIHORO	1441	
		ERIMO	1442	
		DISUSED	1443	
		HVIDBJOERNEN	1444	
		IZU	1445	
		KOJIMA	1446	
		UNDEFINED	1447	
		NOJIMA	1448	
		PAUK	1449	
		PEACOCK	1450	
		POTI	1451	
		SAVAGE	1452	
		SHIRETOKO	1453	
		SOYA	1454	
		TACOMA	1455	
		LEOPARD (TYPE 148)	1456	
		BAMBU	1457	
		CASSIOPEA	1458	
		UNDEFINED	1459	THROUGH 1480
		PGS GENERAL	1481	
		UNDEFINED	1482	THROUGH 1491
		PGB GENERAL	1492	
		UNDEFINED	1493	THROUGH 1502
		PGF GENERAL	1503	
		ALBATROS (TYPE 143)	1504	
		ASHEVILLE	1505	
		BARNEGAT	1506	
		CHONGJU	1507	
		GEPARD (TYPE 143A)	1508	
		HOUKU	1509	
		IVANSUSANIN	1510	
		KAMAN	1511	
		KARTAL	1512	
		KOMAR	1513	
		LA COMBATTANTE II	1514	
		LA COMBATTANTE III	1515	
		LURSSSEN FPB 57 TYPE	1516	
		OKHTENSKIY	1517	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		OSA I	1518	
		OSA II	1519	
		P-4	1520	
		PURGA	1521	
		SAAR 2	1522	
		SAAR 3	1523	
		SAAR 4	1524	
		SAAR 5	1525	
		SARIWON	1526	
		SNOEGG	1527	
		SOHUNG	1528	
		SOJU	1529	
		SORUM	1530	
		STORM	1531	
		T	1532	
		T-43	1533	
		T-58	1534	
		VOSPER 100-FT	1535	
		VOSPER BRAVE	1536	
		WILLEMOES	1537	
		UNDEFINED	1538 THROUGH 1583	
		PC GENERAL	1584	
		ADMIRABLE	1585	
		AGDLEK	1586	
		AKIZUKI	1587	
		ATTACK	1588	
		BAY	1589	
		DISUSED	1590	
		BROOKE MARINE 108-FT	1591	
		CACINE	1592	
		CHONGJU	1593	
		DAPHNE	1594	
		GDANSK	1595	
		HAIKOU	1596	
		HAINAN	1597	
		HANOE	1598	
		K-48	1599	
		KRALJEVICA	1600	
		KRONSHADT	1601	
		LAKE	1602	
		MAGAEN	1603	
		MATSUNAMI	1604	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		MIZUTORI	1605	
		MURAKUMO	1606	
		OBLUZE	1607	
		PGM 71	1608	
		SDB MK II	1609	
		SDB MK III	1610	
		SEAFORTH	1611	
		SHANGHAI	1612	
		SHANGHAI II	1613	
		SHANGHAI II (MODIFIED)	1614	
		SHIKINAMI	1615	
		SO-1	1616	
		SOMAN	1617	
		STENKA	1618	
		T-58	1619	
		TAECHONG	1620	
		UK FORD	1621	
		UMIGIRI	1622	
		US 110-FT	1623	
		US 173-FT	1624	
		UNDEFINED	1625	
		ARCHER	1626	
		ATTACKER	1627	
		23M PC (MANLY)	1628	
		UNDEFINED	1629	THROUGH 1681
		PCF GENERAL	1682	
		BABOCHKA	1683	
		MURAVEY	1684	
		POTI	1685	
		SO-1 (MODIFIED)	1686	
		UNDEFINED	1687	THROUGH 1696
		PCE GENERAL	1697	
		UNDEFINED	1698	THROUGH 1707
		PB GENERAL	1708	
		AKAGI	1709	
		AKIZUKI	1710	
		ALBATROZ	1711	
		ATTACK P-90	1712	
		BARSO	1713	
		BAY	1714	
		BIZAN	1715	
		BROOKE MARINE 37.5M	1716	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		CHONGJIN	1717	
		DABUR	1718	
		DALARO	1719	
		DE L'ESTEREL	1720	
		DILOS	1721	
		DOM ALEIXO	1722	
		DISUSED	1723	
		FREMANTLE	1724	
		GOULANDRIS	1725	
		GUANABACOA	1726	
		HAMAGIRI	1727	
		HAMELIN 37M	1728	
		HIDAKA	1729	
		HUANGPU	1730	
		INTERCEPTOR MK II	1731	
		KIMJIN 67-FT	1732	
		MATSUNAMI	1733	
		MURAKUMO	1734	
		OIRASE	1735	
		P 400	1736	
		P-6	1737	
		PANAGOPOULOS	1738	
		PATRA	1739	
		PBR MK II	1740	
		PBR MK III	1741	
		PGM 71	1742	
		PO-2	1743	
		POLISH K-8	1744	
		POLUCHAT I	1745	
		SHANTOU	1746	
		SHIKINAMI	1747	
		SINHUNG 72-FT	1748	
		SKANOER	1749	
		SOYA/TSUGARU	1750	
		SPEAR	1751	
		STEWART 85-FT	1752	
		SWATOW	1753	
		SWIFT	1754	
		TAISHAN	1755	
		TESHIO	1756	
		TRACKER II	1757	
		US 110-FT	1758	

FIELD CODING FOR J12.0C2

(SHEET 48)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		US ARMY 2001 65-FT	1759	
		USCG 83-FT	1760	
		VEDETTE 28 92-FT	1761	
		VIKRAM	1762	
		VOSPER 70-FT	1763	
		YAMAYURI	1764	
		ZHUK	1765	
		SNOEGG	1766	
		MARS	1767	
		TRIDENT	1768	
		UNDEFINED	1769 THROUGH 1842	
		PBF GENERAL	1843	
		CHAO (CHODO)	1844	
		DE L'ESTEREL	1845	
		GIRNE	1846	
		HAUK	1847	
		HUGIN	1848	
		SLEPEN	1849	
		UNDEFINED	1850	
		SPICA II	1851	
		MARS	1852	
		UNDEFINED	1853 THROUGH 1863	
		PBS GENERAL	1864	
		UNDEFINED	1865 THROUGH 1874	
		PBR GENERAL	1875	
		LEIE	1876	
		PIYAVKA	1877	
		SHMEL	1878	
		VOSH	1879	
		YATUSH	1880	
		YAZ	1881	
		UNDEFINED	1882 THROUGH 1891	
		PT GENERAL	1892	
		AN JU	1893	
		EPITROP	1894	
		HIGGINS 78-FT	1895	
		HUCHUAN PTH-	1896	
		HUZHOU	1897	
		IWON	1898	
		DISUSED	1899	
		KU SONG	1900	
		NO. 11	1901	

FIELD CODING FOR J12.0C2

(SHEET 49)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		P-4	1902	
		P-6	1903	
		PILICA	1904	
		SHERSHEN	1905	
		SIN HUNG	1906	
		SIN NAM	1907	
		SINPO	1908	
		SOLOVEN	1909	
		SPICA	1910	
		TJELD	1911	
		WISLA	1912	
		DISUSED	1913	
		SHANGDONG	1914	
		TURYA	1915	
		UNDEFINED	1916 THROUGH 2047	
		PHM GENERAL	2048	
		MATKA	2049	
		PEGASUS	2050	
		SARANCHA	2051	
		SHIMRIT	2052	
		SPARVIERO	2053	
		UNDEFINED	2054 THROUGH 2063	
		BM GENERAL	2064	
		UNDEFINED	2065 THROUGH 2074	
		BMR GENERAL	2075	
		UNDEFINED	2076 THROUGH 2085	
		SWCL GENERAL	2086	
		UNDEFINED	2087 THROUGH 2096	
		AA GENERAL	2097	
		UNDEFINED	2098 THROUGH 2107	
		AG GENERAL	2108	
		ADOLF	2109	
		AKIZUKI	2110	
		ANGARA	2111	
		ARGO	2112	
		AYANAMI	2113	
		DISUSED	2114 THROUGH 2115	
		CHAMOIS	2116	
		CHIHAYA	2117	
		DALDYN	2118	
		DISUSED	2119	
		DINGHAI	2120	

5.2-502

MIL-STD-6016B

FIELD CODING FOR J12.0C2

(SHEET 50)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		ENDURANCE	2121	
		EXPLORER	2122	
		DISUSED	2123	
		FRIPONNE	2124	
		GALEB	2125	
		UNDEFINED	2126	
		HAM	2127	
		DISUSED	2128	
		HAYABUSA	2129	
		DISUSED	2130	
		ISLES	2131	
		KEYLA	2132	
		KURIHAMA	2133	
		L' ARCHEONAUTE	2134	
		L' ATHOS	2135	
		UNDEFINED	2136	
		LENTRA	2137	
		LIANYUN	2138	
		LSIL	2139	
		MIZUTORI	2140	
		MP-2	2141	
		MP-8	2142	
		MURASAME	2143	
		NEFTEGAZ	2144	
		NØ. 81	2145	
		NORGE	2146	
		OHRE	2147	
		ONEGA	2148	
		DISUSED	2149	
		POSEIDON	2150	
		PS-10	2151	
		RARI	2152	
		RHIN	2153	
		SABAC	2154	
		SHAHSAVAR	2155	
		ST. LYKODIS	2156	
		STALWART	2157	
		T-43	2158	
		TAPATAI	2159	
		TAPPE	2160	
		THULE	2161	
		TOMBA	2162	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		TSUGARU	2163	
		UMITAKA	2164	
		US 184 FT. PCE	2165	
		US 72 FT. HMDL	2166	
		VANGUARD	2167	
		VIS	2168	
		VYTEGRALES	2169	
		WHISKEY	2170	
		WILHELM PULLWER (TYPE 741)	2171	
		PELIKAAN	2172	
		RANCE	2173	
		MERCURE	2174	
		STERNE	2175	
		ALBATROS	2176	
		PHENIX	2177	
		UNDEFINED	2178 THROUGH 2256	
		ARV GENERAL	2257	
		ARGUS	2258	
		ENGADINE	2259	
		RELIANT	2260	
		UNDEFINED	2261 THROUGH 2270	
		AVT GENERAL	2271	
		LEXINGTON	2272	
		UNDEFINED	2273 THROUGH 2282	
		AE GENERAL	2283	
		EVROS	2284	
		DISUSED	2285	
		KILAUEA	2286	
		NITRO	2287	
		REGENT	2288	
		SURIBACHI	2289	
		WESTERWALD (TYPE 760)	2290	
		UNDEFINED	2291 THROUGH 2301	
		AEL GENERAL	2302	
		UNDEFINED	2303 THROUGH 2312	
		AET GENERAL	2313	
		UNDEFINED	2314 THROUGH 2323	
		AETL GENERAL	2324	
		UNDEFINED	2325 THROUGH 2334	
		AGF GENERAL	2335	
		ABDIEL	2336	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		CORONADO	2337	
		GODETIA	2338	
		LA SALLE	2339	
		DISUSED	2340	
		ZINNIA	2341	
		ELBE (TYPE 404)	2342	
		UNDEFINED	2343	THROUGH 2351
		ACM GENERAL	2352	
		UNDEFINED	2353	THROUGH 2362
		APB GENERAL	2363	
		MICHELANGELO	2364	
		UNDEFINED	2365	THROUGH 2374
		ABU GENERAL	2375	
		CARDENAS	2376	
		FINIK I	2377	
		KARPF II	2378	
		SKB 64	2379	
		YANTAI	2380	
		YANNAN	2381	
		YANGUAN	2382	
		TIANEE	2383	
		LA PRUDENTE	2384	
		UNDEFINED	2385	THROUGH 2395
		ABUD GENERAL	2396	
		UNDEFINED	2397	THROUGH 2406
		ANL GENERAL	2407	
		UNDEFINED	2408	THROUGH 2417
		ARC GENERAL	2418	
		EMBA I	2419	
		EMBA II	2420	
		KALAR	2421	
		KLASMA	2422	
		MP-2	2423	
		NEPTUNE	2424	
		TELNOVSK (MODIFIED)	2425	
		YOUDIAN	2426	
		ZEUS	2427	
		UNDEFINED	2428	THROUGH 2440
		AK GENERAL	2441	
		2ND LT JOHN P BOBO	2442	
		ALCHIBA	2443	
		AMGUEMA	2444	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		ANDIZHAN	2445	
		ANDONG	2446	
		ANDROMEDA (CONVERTED)	2447	
		DISUSED	2448	
		BARRICADE	2449	
		BITTERBUSH	2450	
		C3-S-33A TYPE	2451	
		(CONVERTED)		
		C4-S-66A TYPE	2452	
		C4-S-69B TYPE	2453	
		C4-S-A3 TYPE	2454	
		C5-S-75A TYPE	2455	
		CHULYM	2456	
		CPL LOUIS J HAUGE JR	2457	
		DINGHAI	2458	
		DONBA SS	2459	
		FS DESIGN 330	2460	
		GALATI	2461	
		HONGQI	2462	
		ISLES	2463	
		KANARYA	2464	
		KOLOMNA	2465	
		LENINGRADSKY KOMSOMOLETS	2466	
		LSIL	2467	
		NEON ANTONOV	2468	
		NORWALK	2469	
		PT-61	2470	
		SGT MATEJ KOCAK	2471	
		THROSK	2472	
		TREE	2473	
		YANHANG	2474	
		YUNYY PARTIZAN	2475	
		UNDEFINED	2476 THROUGH 2521	
		AKL GENERAL	2522	
		ELTANIN	2523	
		KEYLA	2524	
		UNDEFINED	2525	
		LENTRA	2526	
		UNDEFINED	2527	
		MP 4	2528	
		MP 6	2529	
		MUNA	2530	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		SEKSTAN	2531	
		TELNOVSK	2532	
		WISTING	2533	
		GORGONA	2534	
		UNDEFINED	2535	THROUGH 2549
		AKR GENERAL	2550	
		ALGOL (SL 7)	2551	
		CALLAGHAN	2552	
		COMET	2553	
		METEOR	2554	
		DISUSED	2555	
		MAINE (CONVERTED)	2556	
		UNDEFINED	2557	THROUGH 2566
		AFS GENERAL	2567	
		FORT	2568	
		UNDEFINED	2569	
		MARS	2570	
		RESOURCE	2571	
		UNDEFINED	2572	THROUGH 2580
		AOE GENERAL	2581	
		SACRAMENTO	2582	
		SAGAMI	2583	
		UNDEFINED	2584	THROUGH 2593
		AD GENERAL	2594	
		YELLOWSTONE	2595	
		SAMUEL GOMPERS	2596	
		DIXIE	2597	
		STALWART	2598	
		UNDEFINED	2599	THROUGH 2608
		AWW GENERAL	2609	
		UNDEFINED	2610	THROUGH 2619
		AH GENERAL	2620	
		HAVEN	2621	
		OB	2622	
		DISUSED	2623	
		UNDEFINED	2624	THROUGH 2632
		AGB GENERAL	2633	
		DOBRYNYA NIKITICH	2634	
		HANSE	2635	
		IVANSUSANIN	2636	
		SHIRASE	2637	
		YANHA	2638	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		UNDEFINED	2639 THROUGH 2648	
		AGBL GENERAL	2649	
		EISVOGEL (TYPE 721)	2650	
		DISUSED	2651	
		UNDEFINED	2652 THROUGH 2661	
		AGI GENERAL	2662	
		ALPINIST	2663	
		ARMINZA	2664	
		UNDEFINED	2665	
		BALZAM	2666	
		BOLOGOE	2667	
		DISUSED	2668	
		HAM	2669	
		DISUSED	2670	
		DISUSED	2671	
		LENTA	2672	
		MAYAK	2673	
		MIRNYY	2674	
		MOMA	2675	
		NIKOLAY ZUBOV	2676	
		OKEAN	2677	
		DISUSED	2678	
		PAMIR	2679	
		PRIMORYE	2680	
		ALSTER (TYPE 423)	2681	
		UNDEFINED	2682 THROUGH 2705	
		ALS GENERAL	2706	
		UNDEFINED	2707 THROUGH 2716	
		AEM GENERAL	2717	
		AMGA	2718	
		ANDIZHAN (MODIFIED)	2719	
		LAMA	2720	
		MALINA	2721	
		MELITOPOL	2722	
		MP 6	2723	
		UNDEFINED	2724 THROUGH 2733	
		AGM GENERAL	2734	
		AGM-24	2735	
		GEN HOYT S VANDENBERG	2736	
		OBSERVATION ISLAND	2737	
		RANGE SENTINEL	2738	
		(HASKELL TYPE)		

FIELD CODING FOR J12.0C2 (SHEET 56)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		REDSTONE	2739	
		UNDEFINED	2740 THROUGH 2749	
		AGOR GENERAL	2750	
		ABKHAZIYA	2751	
		AKADEMIK KRYLOV	2752	
		ARAD	2753	
		BALIKPAPAN	2754	
		BELGICA	2755	
		DISUSED	2756	
		COOK	2757	
		D'ENTRECASTEAUX	2758	
		DOBRYNYA NIKITICH	2759	
		DONG MING	2760	
		ELTANIN	2761	
		ENDEAVOR	2762	
		FRANCESCO NULLO	2763	
		DISUSED	2764	
		GRIGORE ANTIPA	2765	
		GYRE	2766	
		HAYES	2767	
		HECLA	2768	
		MELVILLE	2769	
		MSC 60	2770	
		NAUTILUS	2771	
		NEVELSKOY	2772	
		NIKOLAY ZUBOV	2773	
		PITHEAS	2774	
		POLYUS	2775	
		QUEST	2776	
		ROBERT D CONRAD	2777	
		T-43	2778	
		TRITON	2779	
		TUI	2780	
		TYDEMAN	2781	
		XIANG YANG HONG	2782	
		YANLUN	2783	
		YUG	2784	
		ZENOBE GRAMME	2785	
		MAYAK	2786	
		UNDEFINED	2787 THROUGH 2823	
		AGOB GENERAL	2824	
		POLARSTERN	2825	

FIELD CODING FOR J12.0C2 (SHEET 57)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		UNDEFINED	2826 THROUGH 2835	
		AGOS GENERAL	2836	
		UNDEFINED	2837 THROUGH 2845	
		AO GENERAL	2846	
		UNDEFINED	2847	
		AKAR	2848	
		ALBAY BURBAK	2849	
		ALTAY	2850	
		UNDEFINED	2851	
		BASKUNCHAK	2852	
		BAYLEAF	2853	
		BINBASI GURGAN	2854	
		DISUSED	2855	
		CIMARRON	2856	
		CIMARRON (JUMBOISED)	2857	
		DORA	2858	
		HAMANA	2859	
		DISUSED	2860	
		DISUSED	2861	
		HENRY J KAISER	2862	
		IRTYSH	2863	
		KALININGRADNEFT	2864	
		KHOBİ	2865	
		KONDA	2866	
		METTAWEE	2867	
		MISPILLION (JUMBOISED)	2868	
		MOSKIT	2869	
		NEOSHO	2870	
		NERCHA	2871	
		NORWEGIAN BOW	2872	
		OLEKMA	2873	
		PATAPSCO	2874	
		PEVEK	2875	
		UNDEFINED	2876	
		SOFIYA	2877	
		SPESSART (TYPE 704A)	2878	
		TASKIZAK	2879	
		USEDOM	2880	
		WALCHENSEE (TYPE 703)	2881	
		WAVE	2882	
		DISUSED	2883	
		YUZBASI TOLUNAY	2884	

FIELD CODING FOR J12.0C2 (SHEET 58)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		BRAMBLELEAF	2885	
		UNDEFINED	2886 THROUGH 2936	
		AOT GENERAL	2937	
		AMERICAN EXPLORER	2938	
		AOTL	2939	
		EBANOL	2940	
		FULIN	2941	
		FUZHOU	2942	
		GUANZGHOU	2943	
		LEIZHOU	2944	
		MAUMEE	2945	
		METTAWEE	2946	
		MISSION	2947	
		POTOMOC	2948	
		SEALIFT	2949	
		SUAMICO	2950	
		T 5 TYPE	2951	
		TM2	2952	
		PORT VENDRES	2953	
		UNDEFINED	2954 THROUGH 2973	
		AOTL GENERAL	2974	
		DISUSED	2975	
		KH0BI	2976	
		UNDEFINED	2977 THROUGH 2986	
		AOR GENERAL	2987	
		BANDAR ABBAS	2988	
		BEREZINA	2989	
		BORIS CHILIKIN	2990	
		CAPITAN OLA PANTOJA	2991	
		DEEPAK	2992	
		DUBNA	2993	
		DURANCE	2994	
		FUQING	2995	
		KAZBEK	2996	
		KHARG	2997	
		MEERSBURG (TYPE 701C)	2998	
		MESAR	2999	
		OLWEN	3000	
		POOLSTER	3001	
		POLYARNIK	3002	
		PROTECTEUR	3003	
		PROVIDER	3004	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		ROVER	3005	
		SAO GABRIEL	3006	
		STROMBOLI	3007	
		TIDE (IMPROVED)	3008	
		UDA	3009	
		WICHITA	3010	
		FORT VICTORIA	3011	
		BERLIN (TYPE 702C)	3012	
		UNDEFINED	3013 THROUGH 3042	
		AORL GENERAL	3043	
		LEIZHOU	3044	
		UNDEFINED	3045 THROUGH 3054	
		AOL GENERAL	3055	
		PUNARUU	3056	
		UNDEFINED	3057 THROUGH 3065	
		AGP GENERAL	3066	
		GRAHAM COUNTY	3067	
		NORGE	3068	
		DISUSED	3069	
		MERCUUR	3070	
		UNDEFINED	3071 THROUGH 3079	
		AP GENERAL	3080	
		MIKHAIL KALININ	3081	
		PANDORA	3082	
		QIONGSHA	3083	
		UNDEFINED	3084 THROUGH 3093	
		AGR GENERAL	3094	
		UNDEFINED	3095 THROUGH 3104	
		AOSR GENERAL	3105	
		UNDEFINED	3106 THROUGH 3115	
		AR GENERAL	3116	
		ACHELOUS	3117	
		AJAX	3118	
		AMPHION	3119	
		AMUR	3120	
		ARL I	3121	
		DALIANG	3122	
		DILIGENCE	3123	
		DIXIE	3124	
		JULES VERNE	3125	
		OSKOL	3126	
		RHIN	3127	

FIELD CODING FOR J12.0C2 (SHEET 60)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		STALWART	3128	
		UNDEFINED	3129 THROUGH 3145	
		ARL GENERAL	3146	
		ARCHELOUS	3147	
		UNDEFINED	3148 THROUGH 3157	
		AGE GENERAL	3158	
		BELGICA	3159	
		BERRY	3160	
		UNDEFINED	3161	
		COMMANDANT RIVIERE	3162	
		DESNAL	3163	
		DOBRYNYA NIKITICH	3164	
		EF 3	3165	
		HENRI POINCARE	3166	
		ILE D'OLERON	3167	
		IVANSUSANIN	3168	
		KOLOMNA	3169	
		LENTRA	3170	
		MARSHAL NEDELIN	3171	
		MOMA	3172	
		MP-8	3173	
		MUNA	3174	
		NARVIK	3175	
		OS-3	3176	
		POINT LOMA	3177	
		POTOK	3178	
		QUARTO	3179	
		SASHA	3180	
		SIBIR	3181	
		SO-1	3182	
		T-43	3183	
		TRITON	3184	
		DISUSED	3185	
		YAL 01	3186	
		YANXI	3187	
		ROSSETTI	3188	
		DENTI	3189	
		MONGE	3190	
		UNDEFINED	3191 THROUGH 3227	
		ARS GENERAL	3228	
		BOLSTER	3229	
		DISUSED	3230	

FIELD CODING FOR J12.0C2

(SHEET 61)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		INGUL	3231	
		KATUN I	3232	
		KATUN II	3233	
		KOWAN	3234	
		LSIL 351	3235	
		MIKHAIL RUDNITSKY	3236	
		OREL	3237	
		PAMIR	3238	
		PIAST	3239	
		PROTEO	3240	
		PS-11	3241	
		SAFEGUARD	3242	
		SILVA	3243	
		SPASILAC	3244	
		DISUSED	3245	
		US 149 FT	3246	
		YANDING	3247	
		UNDEFINED	3248 THROUGH 3273	
		ARSD GENERAL	3274	
		UNDEFINED	3275 THROUGH 3284	
		ASVR GENERAL	3285	
		UNDEFINED	3286 THROUGH 3295	
		AOS GENERAL	3296	
		ALATNA	3297	
		LUZA	3298	
		URAL	3299	
		VALA	3300	
		TONTI	3301	
		UNDEFINED	3302 THROUGH 3311	
		AF GENERAL	3312	
		CROITOR	3313	
		DANLIN	3314	
		MAYAK	3315	
		RIEGEL	3316	
		UNDEFINED	3317 THROUGH 3326	
		AKS GENERAL	3327	
		UNDEFINED	3328 THROUGH 3337	
		AKSL GENERAL	3338	
		UNDEFINED	3339 THROUGH 3348	
		AFL GENERAL	3349	
		UNDEFINED	3350 THROUGH 3359	
		ASR GENERAL	3360	

5.2-514

MIL-STD-6016B

FIELD CODING FOR J12.0C2

(SHEET 62)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		ANTEO	3361	
		CHANTICLEER	3362	
		DAHIANG	3363	
		DALANG	3364	
		ELBRUS	3365	
		FEHMARN (TYPE 720B)	3366	
		FUSHIMI	3367	
		GALATI	3368	
		HUDONG	3369	
		KURTARAN	3370	
		NEPA	3371	
		PIGEON	3372	
		PRUT	3373	
		ROSLAVL	3374	
		SPASILAC	3375	
		VALDAY	3376	
		ZHONGHUA	3377	
		UNDEFINED	3378 THROUGH 3401	
		AS GENERAL	3402	
		ACHELOUS	3403	
		AEGIR	3404	
		DISUSED	3405	
		ATREK	3406	
		CHIYODA	3407	
		DADONG	3408	
		DAZHOU	3409	
		DIVER	3410	
		DNEPR	3411	
		DNEPR (MODIFIED)	3412	
		DON	3413	
		EMORY S LAND	3414	
		FULTON	3415	
		HUNLEY	3416	
		L Y SPEAR	3417	
		PROTEUS	3418	
		DISUSED	3419	
		SIMON LAKE	3420	
		UGRA	3421	
		UNDEFINED	3422 THROUGH 3447	
		ASL GENERAL	3448	
		UNDEFINED	3449 THROUGH 3458	
		AGS GENERAL	3459	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		AGS 39 CLASS	3460	
		AKASHI	3461	
		ALMEIDA CARVALHO	3462	
		AMMIRAGLIO MAGNAGHI	3463	
		ANDRIJA MOHOROVICIC	3464	
		AUK	3465	
		BIYA	3466	
		BOLOGUE	3467	
		UNDEFINED	3468	
		BUYSKES	3469	
		C4-S-A1 TYPE (CONVERTED)	3470	
		CHAUVENET	3471	
		COOK	3472	
		DING HAI	3473	
		FINIK	3474	
		FS DESIGN 330	3475	
		FUTAMI	3476	
		HAMASHIO	3477	
		HEIYO	3478	
		KAIBOKAN I	3479	
		KAIYO	3480	
		KAMENKA	3481	
		DISUSED	3482	
		UNDEFINED	3483	
		L'ESPERANCE	3484	
		UNDEFINED	3485	
		LENTRA	3486	
		LSIL	3487	
		MEIYO	3488	
		MELITOPOL	3489	
		MOMA	3490	
		MONOWAI	3491	
		MORESBY	3492	
		MP-8	3493	
		MSC-294 (BLUEBIRD)	3494	
		NYRYAT I	3495	
		NYRYAT II	3496	
		SAMARA	3497	
		SHOYO	3498	
		SILAS BENT	3499	
		STERNE	3500	
		SUMA	3501	

FIELD CODING FOR J12.0C2

(SHEET 64)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		T-43	3502	
		TAKUYO	3503	
		TELNOVSK	3504	
		TELNOVSK (MODIFIED)	3505	
		TENYO	3506	
		VICTORY (CONVERTED)	3507	
		WILKES	3508	
		YANLAI	3509	
		YANXU	3510	
		MIRTO	3511	
		MARS	3512	
		LAPEROUSE	3513	
		UNDEFINED	3514 THROUGH 3579	
		AGSA GENERAL	3580	
		UNDEFINED	3581 THROUGH 3590	
		AGSC GENERAL	3591	
		EXPLORER	3592	
		FLINDERS	3593	
		TAINO	3594	
		BULLDOG	3595	
		ROEBUCK	3596	
		UNDEFINED	3597 THROUGH 3604	
		AX GENERAL	3605	
		ARIS	3606	
		DISUSED	3607	
		JADRAN	3608	
		JERVIS BAY	3609	
		JOSE MARTI	3610	
		MP-8	3611	
		SMOLNY	3612	
		UGRA	3613	
		VIETNAM HEROICO	3614	
		WODNIK	3615	
		UNDEFINED	3616 THROUGH 3630	
		AXL GENERAL	3631	
		UNDEFINED	3632	
		LEOPARD	3633	
		MAYAK	3634	
		UNDEFINED	3635 THROUGH 3642	
		AXS GENERAL	3643	
		AMERIGO VESPUCCI	3644	
		CAROLY	3645	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		CARSARO II	3646	
		GORCH FOCK (TYPE 441A)	3647	
		MIRCEA	3648	
		PALINURO	3649	
		SAGRES	3650	
		STELLA POLARE	3651	
		UNDEFINED	3652	THROUGH 3659
		AT GENERAL	3660	
		UNDEFINED	3661	THROUGH 3665
		ATA GENERAL	3666	
		ABNAKI	3667	
		APACHE	3668	
		ARMY 254	3669	
		ATAK	3670	
		ATLANTE	3671	
		AZUMA	3672	
		BELIER	3673	
		UNDEFINED	3674	
		GAJ	3675	
		GNIEWKO	3676	
		GORYN	3677	
		GROMOVOY	3678	
		KUDRET	3679	
		MAITO	3680	
		MB-31	3681	
		MB-65	3682	
		MOTYL	3683	
		OKHTENSKIY	3684	
		ONCU	3685	
		POWHATAN	3686	
		ROSLAVL	3687	
		ROYSTERER	3688	
		SAINT	3689	
		SCHULTZ XAVIER	3690	
		SORUM	3691	
		TENACE	3692	
		TUZHONG	3693	
		TYPHOON	3694	
		WANGER00GE (TYPE 722B)	3695	
		ZENIT	3696	
		MAITO	3697	
		ARMEN	3698	

FIELD CODING FOR J12.0C2 (SHEET 66)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		UNDEFINED	3699 THROUGH 3737	
		ATR GENERAL	3738	
		TENACE	3739	
		UNDEFINED	3740 THROUGH 3748	
		ATS GENERAL	3749	
		EDENTON	3750	
		OKHTENSKY	3751	
		LANGEOOG (TYPE 754)	3752	
		ARGUS	3753	
		UNDEFINED	3754 THROUGH 3762	
		AWT GENERAL	3763	
		UNDEFINED	3764	
		BASENTO	3765	
		FUZHOU (MODIFIED)	3766	
		KANGAN	3767	
		LEIZHOU (MODIFIED)	3768	
		LSIL	3769	
		MANYCH	3770	
		MINCIO	3771	
		PIAVE	3772	
		TEVERE	3773	
		ULUBAT	3774	
		VODA	3775	
		YW-83	3776	
		Z	3777	
		UNDEFINED	3778 THROUGH 3797	
		SERVICE CRAFT GENERAL	3798	
		BARGE, GENERAL	3799	
		YO GENERAL	3800	
		YOG GENERAL	3801	
		YHT GENERAL	3802	
		YRNS GENERAL	3803	
		YOS GENERAL	3804	
		YPK GENERAL	3805	
		YRR GENERAL	3806	
		YRB GENERAL	3807	
		YRST GENERAL	3808	
		YOM GENERAL	3809	
		YOSS GENERAL	3810	
		YW GENERAL	3811	
		UNDEFINED	3812 THROUGH 3827	
		YD GENERAL	3828	

FIELD CODING FOR J12.0C2

(SHEET 67)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		YM GENERAL	3829	
		YFD GENERAL	3830	
		YFP GENERAL	3831	
		YGT GENERAL	3832	
		YR GENERAL	3833	
		UNDEFINED	3834 THROUGH 3840	
		YFD GENERAL	3841	
		YFDB GENERAL	3842	
		YFDM GENERAL	3843	
		YFDL GENERAL	3844	
		UNDEFINED	3845 THROUGH 3850	
		YRD GENERAL	3851	
		YRDB GENERAL	3852	
		YRDM GENERAL	3853	
		YRDL GENERAL	3854	
		UNDEFINED	3855 THROUGH 3861	
		LIGHTER GENERAL	3862	
		YE GENERAL	3863	
		YF GENERAL	3864	
		YFC GENERAL	3865	
		YFR GENERAL	3866	
		YC GENERAL	3867	
		YFT GENERAL	3868	
		UNDEFINED	3869 THROUGH 3878	
		YT GENERAL	3879	
		YTB GENERAL	3880	
		YTM GENERAL	3881	
		YTL GENERAL	3882	
		UNDEFINED	3883 THROUGH 3892	
		YAGF GENERAL	3893	
		YAG GENERAL	3894	
		YV GENERAL	3895	
		YNG GENERAL	3896	
		YP GENERAL	3897	
		YFU GENERAL	3898	
		YAM GENERAL	3899	
		YNC GENERAL	3900	
		YLC GENERAL	3901	
		YVS GENERAL	3902	
		YRG GENERAL	3903	
		YAGT GENERAL	3904	
		YPT GENERAL	3905	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		YRC GENERAL	3906	
		YDT GENERAL	3907	
		YNT GENERAL	3908	
		YH GENERAL	3909	
		YFB GENERAL	3910	
		YTR GENERAL	3911	
		YFL GENERAL	3912	
		YAC GENERAL	3913	
		YSR GENERAL	3914	
		YSG GENERAL	3915	
		YDG GENERAL	3916	
		KHABAROV	3917	
		UNDEFINED	3918 THROUGH 3936	
		TM GENERAL	3937	
		TMD GENERAL	3938	
		TMB GENERAL	3939	
		TMK GENERAL	3940	
		TMF GENERAL	3941	
		TMC GENERAL	3942	
		TMCS GENERAL	3943	
		TMWW GENERAL	3944	
		TMA GENERAL	3945	
		TMH GENERAL	3946	
		TMGB GENERAL	3947	
		TMI GENERAL	3948	
		TML GENERAL	3949	
		TMOT GENERAL	3950	
		TMM GENERAL	3951	
		TMP GENERAL	3952	
		TMFR GENERAL	3953	
		TMR GENERAL	3954	
		TMOR GENERAL	3955	
		TMOL GENERAL	3956	
		TME GENERAL	3957	
		TMGS GENERAL	3958	
		TMLS GENERAL	3959	
		TMS GENERAL	3960	
		TMOS GENERAL	3961	
		TMO GENERAL	3962	
		TMX GENERAL	3963	
		TMWT GENERAL	3964	
		UNDEFINED	3965 THROUGH 3989	

FIELD CODING FOR J12.0C2

(SHEET 69)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		TMT GENERAL	3990	
		TMTR GENERAL	3991	
		TMTS GENERAL	3992	
		UNDEFINED	3993 THROUGH 4002	
		TU GENERAL	4003	
		TUF GENERAL	4004	
		TUB GENERAL	4005	
		TUI GENERAL	4006	
		TUR GENERAL	4007	
		TUT GENERAL	4008	
		TUS GENERAL	4009	
		TUC GENERAL	4010	
		TUW GENERAL	4011	
		UNDEFINED	4012 THROUGH 4023	
		TJ GENERAL	4024	
		TJF GENERAL	4025	
		TJC GENERAL	4026	
		TJCS GENERAL	4027	
		TJGB GENERAL	4028	
		UNDEFINED	4029 THROUGH 4038	
		TS GENERAL	4039	
		TSG GENERAL	4040	
		TSR GENERAL	4041	
		UNDEFINED	4042 THROUGH 4052	
		MPS GENERAL	4053	
		UNDEFINED	4054 THROUGH 4069	
		SURFACE SPECIFIC TYPE	4070 THROUGH 4094	
		1-25		
		RESET TO NO STATEMENT	4095	

809	001	SUBSURFACE (MARITIME) SPECIFIC TYPE		THE SPECIFIC TYPE OF POINT OR TRACK WITH AN ENVIRONMENT/CATEGORY OF SUBSURFACE (MARITIME).

		NO STATEMENT	0	
		SS GENERAL	1	
		ABTAO SS	2	
		DISUSED	3	
		DISUSED	4	
		UNDEFINED	5	
		DISUSED	6	
		GUPPY II SS	7	
		GUPPY IIA SS	8	

5.2-522

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
809	001	SUBSURFACE (MARITIME) SPECIFIC (CONTINUED) TYPE		

		GUPPY III SS	9	
		HAI LUNG SS	10	
		DISUSED	11	
		SAURO (TYPE 1081) SS	12	
		SAURO (IMPROVED) SS	13	
		TANG SS	14	
		TYPE SNA 72 SS	15	
		UZUSHIO SS	16	
		WALRUS SS	17	
		YUUSHIO SS	18	
		UNDEFINED	19	
		DISUSED	20	
		PELOSI SS	21	
		UNDEFINED	22 THROUGH 360	
		SSB GENERAL	361	
		GOLF SSB	362	
		GOLF II SSB	363	
		GOLF III SSB	364	
		GOLF V SSB	365	
		UNDEFINED	366 THROUGH 440	
		SSBN GENERAL	441	
		BENJAMIN FRANKLIN SSBN	442	
		DELTA I SSBN	443	
		DELTA II SSBN	444	
		DELTA III SSBN	445	
		DELTA IV SSBN	446	
		HOTEL III SSBN	447	
		DISUSED	448	
		L'INFLEXIBLE SSBN	449	
		DISUSED	450	
		UNDEFINED	451	
		OHIO SSBN	452	
		RESOLUTION SSBN	453	
		TYPHOON SSBN	454	
		VANGUARD SSBN	455	
		YANKEE SSBN	456	
		YANKEE I SSBN	457	
		YANKEE II SSBN	458	
		XIA SSBN	459	
		LE TERRIBLE SSBN	460	
		UNDEFINED	461 THROUGH 720	
		SSN GENERAL	721	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
809	001	SUBSURFACE (MARITIME) SPECIFIC (CONTINUED)		
		TYPE		

		AKULA SSN	722	
		ALFA SSN	723	
		AMATHEPT SSN	724	
		CHARLIE/VICTOR SSGN/SSN	725	
		CHURCHILL SSN	726	
		ECHO/NOVEMBER SSGN/SSN	727	
		DISUSED	728	
		DISUSED	729	
		HAN SSN	730	
		HOTEL SSN	731	
		LOS ANGELES SSN	732	
		MIKE SSN	733	
		NARWHAL SSN	734	
		DISUSED	735	
		RUBIS SSN	736	
		SEAWOLF SSN	737	
		SIERRA SSN	738	
		DISUSED	739	
		DISUSED	740	
		STURGEON SSN	741	
		SWIFTSURE SSN	742	
		TRAFALGAR SSN	743	
		DISUSED	744	
		VICTOR I SSN	745	
		VICTOR II SSN	746	
		VICTOR III SSN	747	
		YANKEE SSN	748	
		VIRGINIA SSN	749	
		UNDEFINED	750 THROUGH 1200	
		SSG GENERAL	1201	
		JULIETT SSG	1202	
		UNDEFINED	1203 THROUGH 1245	
		SSGN GENERAL	1246	
		CHARLIE I SSGN	1247	
		CHARLIE II SSGN	1248	
		ECHO II SSGN	1249	
		OSCAR SSGN	1250	
		PAPA SSGN	1251	
		UNDEFINED	1252 THROUGH 1345	
		SSK GENERAL	1346	
		AGOSTA SSK	1347	
		UNDEFINED	1348	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
809	001	SUBSURFACE (MARITIME) SPECIFIC (CONTINUED)		
		TYPE		

		FOXTROT SSK	1349	
		HEROJ SSK	1350	
		KILO SSK	1351	
		MING SSK	1352	
		NARVAL SSK	1353	
		DISUSED	1354 THROUGH 1355	
		ROMEO SSK	1356	
		SAVA SSK	1357	
		SUTJESKA SSK	1358	
		TANGO SSK	1359	
		UPHOLDER SSK	1360	
		WHISKEY SSK	1361	
		WHISKEY V SSK	1362	
		ZULU IV SSK	1363	
		DORIS SSK	1364	
		VICTORIA SSK	1365	
		TYPE 212 SSK	1366	
		UNDEFINED	1367 THROUGH 1665	
		SSC GENERAL	1666	
		DELFINEN SSC	1667	
		DRAKEN SSC	1668	
		NAECKEN SSC	1669	
		NARHVALEN SSC	1670	
		SJOORMEN SSC	1671	
		TOTI TYPE 1075 SSC	1672	
		TYPE 205 SSC	1673	
		TYPE 206 SSC	1674	
		KOBBERN SSC	1675	
		TYPE 209 (TYPE 1100) SSC	1676	
		TYPE 209 (TYPE 1200) SSC	1677	
		TYPE 209 (TYPE 1300) SSC	1678	
		TYPE 209 (TYPE 1400) SSC	1679	
		TYPE 209 (TYPE 1500) SSC	1680	
		ULA SSC	1681	
		TYPE 211 SSC	1682	
		VASTERGOETLAND SSC	1683	
		TYPE 206A SSC	1684	
		UNDEFINED	1685 THROUGH 1945	
		SSA GENERAL	1946	
		BRAVO SSA	1947	
		DOLPHIN (AGSS) SSA	1948	
		GOLF I SSA	1949	

FIELD CODING FOR J12.0C2

(SHEET 73)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

809	001	SUBSURFACE (MARITIME) SPECIFIC (CONTINUED) TYPE		
-----	-----	--	--	--

GOLF I (MODIFIED) SSA	1950
GOLF II SSA	1951
INDIA SSA	1952
LIMA SSA	1953
ROMEO SSA	1954
ZULU SSA	1955
UNDEFINED	1956 THROUGH 4069
SUBSURFACE SPECIFIC TYPE 1-25	4070 THROUGH 4094
RESET TO NO STATEMENT	4095

810	001	LAND (GROUND) SPECIFIC TYPE		
-----	-----	-----------------------------	--	--

THE SPECIFIC TYPE OF POINT OR TRACK
WITH AN ENVIRONMENT/CATEGORY OF
LAND (GROUND).

NO STATEMENT	0
TOW	1
DRAGON	2
LANCE	3
SHILLEAGH	4
SERGEANT	5
AMMUNITION	6
POL	7
OBSERVATION POSTS	8
RADIO DIRECTION FINDER	9
RIVER	10
STREAM	11
LAKE	12
MARSH/SWAMP	13
MOUNTAIN	14
HILLTOP	15
RIDGE	16
DEPRESSION	17
VALLEY	18
CAVE	19
BRIDGE	20
DAM	21
BUILDING	22
VILLAGE	23
TOWN	24
ROAD INTERSECTION	25
HOSPITAL	26
HAWK	27

5.2-526

MIL-STD-6016B

FIELD CODING FOR J12.0C2

(SHEET 74)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE -----	(CONTINUED)	
		I-HAWK	28	
		PATRIOT	29	
		NIKE	30	
		REDEYE	31	
		STINKER	32	
		HELLFIRE	33	
		PERSHING	34	
		JEEP	35	
		CAR	36	
		MOTORCYCLE	37	
		BICYCLE	38	
		AMPHIBIOUS VEHICLE	39	
		RIVER CROSSING EQUIPMENT	40	
		MECHANIZED MINE SWEEPER	41	
		MOBILE RADAR	42	
		SMOKE GENERATOR	43	
		(SSSB) SHIP SHORE SHIP BUFFER	44	
		(RADIL) ROCC AWACS	45	
		DIGITAL INTERFACE LINK		
		(ASIT) ADAPTABLE SURFACE	46	
		INTERFACE TERMINAL		
		(AEGIS) AEW GROUND	47	
		INTERFACE SEGMENT		
		AMBULANCE	48	
		BIOLOGICAL WEAPONS	49	
		CHEMICAL WEAPONS	50	
		NUCLEAR WEAPONS	51	
		ENGINEER VEHICLES	52	
		GENERATOR	53	
		JAMMERS	54	
		MAINTENANCE VEHICLE	55	
		MULTIPLE ROCKET LAUNCHER	56	
		RADIO	57	
		REMOTE SENSOR	58	
		SELF PROPELLED ARTILLERY	59	
		TACTICAL BRIDGE	60	
		TOWED ARTILLERY GUN	61	
		RECOILLESS RIFLE	62	
		(TACCP) TACTICAL COMMAND POST	63	
		BRIGADE	64	
		CORPS	65	

5.2-527

MIL-STD-6016B

FIELD CODING FOR J12.0C2

(SHEET 75)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE -----	(CONTINUED)	
		GROUP	66	
		DIVISION	67	
		REGIMENT	68	
		BATTALION	69	
		COMPANY	70	
		PLATOON	71	
		SQUADRON	72	
		AIRBASE	73	
		WING	74	
		ANTI-AIRCRAFT GUN	75	
		AIR DEFENSE ARTILLERY GUN	76	
		MORTAR	77	
		FLAMETHROWER	78	
		TSC/MOCC/MARITIME HEADQUARTERS	79	
		MAIN BATTLE TANK	80	
		MEDIUM TANK	81	
		LIGHT TANK	82	
		TRAIN	83	
		ARMORED PERSONNEL VEHICLE	84	
		ARMORED INFANTRY FIGHTING VEHICLE	85	
		LIGHT TRUCK	86	
		MEDIUM TRUCK	87	
		HEAVY TRUCK	88	
		TANK TRANSPORTER	89	
		DUMMY	90	
		TRAP	91	
		POINT TARGET	92	
		EA SITE	93	
		ARMORED PERSONNEL CARRIER	94	
		ARMORED INFANTRY FIGHTING VEHICLE	95	
		GCI SITE	96	
		CRC	97	
		TACC (AF)	98	
		CRP	99	
		TACC (MC)	100	
		MPC	101	
		TAOC	102	

5.2-528

MIL-STD-6016B

FIELD CODING FOR J12.0C2

(SHEET 76)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		AADCCS (AN/TSQ-73)	103	
		DASC	104	
		FACP	105	
		FASC	106	
		AADCP	107	
		ASRT	108	
		NCC	109	
		RCC	110	
		ROCC	111	
		DC	112	
		WOC	113	
		(ASOC) AIR SUPPORT	114	
		OPERATIONS CENTER		
		(TCO) TACTICAL COMBAT	115	
		OPERATIONS CENTER		
		(TOC) TACTICAL	116	
		OPERATIONS CENTER		
		(ARMY)		
		CHAPPARAL	117	
		FIRE DIRECTION CENTER	118	
		FIRE UNIT	119	
		DIVARTY	120	
		BATTERY	121	
		SELF-PROPELLED ARTILLERY	122	
		(GOC) GROUND OPERATIONS	123	
		CENTER		
		(ICC) INFORMATION	124	
		COORDINATION CENTER		
		(BOC) BATTERY OPERATIONS	125	
		CENTER		
		(ECS) ENGAGEMENT CONTROL	126	
		STATION		
		(PCP) PLATOON COMMAND	127	
		POST		
		(CRG) COMMUNICATIONS	128	
		RELAY GROUP		
		TUNNELS	129	
		RAILYARDS	130	
		BENCHMARK	131	
		TROOP	132	
		LANDING ZONE	133	
		DROP ZONE	134	
		ASSEMBLY OR STAGING AREA	135	

FIELD CODING FOR J12.0C2

(SHEET 77)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		DECONTAMINATION SITE	136	
		RE-ENTRY POINT/LINE	137	
		CROSSING AREA FOR		
		RECON PATROLS		
		SAM	138	
		SSM	139	
		ANTI-TANK WEAPON	140	
		DIRECT SUPPORT	141	
		GENERAL SUPPORT	142	
		INTERCEPTION	143	
		BLOCKING	144	
		REINFORCING	145	
		REDEPLOYMENT	146	
		POLICING	147	
		INTRUDING	148	
		PREPARING BARRIER	149	
		DUMPING EQUIPMENT	150	
		RELIEF	151	
		CONVOY	152	
		ANTI-AIRCRAFT	153	
		AIR DEFENSE ARTILLERY	154	
		ARTILLERY	155	
		SURVEILLANCE	156	
		PICKETING	157	
		LOGISTICS SUPPORT	158	
		SEARCH	159	
		DIRECT ARTILLERY SUPPORT	160	
		GENERAL ARTILLERY	161	
		SUPPORT		
		MAINTAINING LINE OF	162	
		COMMUNICATION		
		COMMITTING	163	
		COUNTER-ATTACK	164	
		ELECTRONIC WARFARE	165	
		THREATEN	166	
		DESTROY	167	
		CONTACT	168	
		EVALUATION	169	
		TRANSPORTER	170	
		ARMORED VEHICLE	171	
		GUN	172	
		HALF TRACK	173	
		COMMUNICATIONS EQUIPMENT	174	

FIELD CODING FOR J12.0C2 (SHEET 78)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		TARGET	175	
		AIR DEFENSE SITE	176	
		FIM-92 STINGER	177	
		NIM-23 HAWK	178	
		MIM-42 REDEYE	179	
		MIM-72 CHAPARRAL	180	
		MIM-104 PATRIOT	181	
		RIM-2 TERRIER	182	
		RIM-7 SEA SPARROW	183	
		RIM-8 TALOS	184	
		RIM-24 TARTAR	185	
		RIM-66 STANDARD MISSILE	186	
		RIM-67 STANDARD MISSILE	187	
		BLOWPIPE	188	
		DISUSED	189 THROUGH 190	
		SEA DART	191	
		DISUSED	192 THROUGH 193	
		CROTALE	194	
		RAPIER	195	
		RBS-70/GIRAFFE	196	
		SAM BLOODHOUND	197	
		SAM ROLAND	198	
		SA-2 GUIDELINE	199	
		SA-3 GOA	200	
		SA-4 GANEF	201	
		SA-N-3 GOBLET	202	
		SA-5 GAMMON	203	
		SA-N-4 GECKO	204	
		SA-6 GAINFUL	205	
		SA-N-6 GRUMBLE	206	
		SA-7 GRAIL	207	
		SA-8 GECKO	208	
		SA-9 GASKIN	209	
		SA-10 GRUMBLE	210	
		SA-11 GADFLY	211	
		SA-12	212	
		SA-13 GOPHER	213	
		MISTRAL	214	
		SA-N-7 GADFLY	215	
		SA-N-8 GREMLIN	216	
		SA-14 GREMLIN	217	
		SA-16 GIMLET	218	
		SA-X-17	219	

FIELD CODING FOR J12.0C2

(SHEET 79)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		TOC (THAAD)	220	
		SSI (THAAD)	221	
		LCS (THAAD)	222	
		LAUNCHER (THAAD)	223	
		TMD-GBR (THAAD)	224	
		JTAGS	225	
		ADTOC/BN	226	
		ADTOC/BDE	227	
		ADCP	228	
		SM-2 BLOCK II	229	
		SM-2 BLOCK III	230	
		SM-2 BLOCK IIIA	231	
		SM-2 BLOCK IIIB	232	
		SM-2 BLOCK IV	233	
		SM-2 BLOCK IVA	234	
		SM-3 LEAP	235	
		SA-N-5 GRAIL	236	
		SA-N-11 GRISOM	237	
		SA-12A GLADIATOR	238	
		SA-12B GIANT	239	
		SA-14 GREMLIN	240	
		SA-15 GAUNTLET	241	
		SA-17 GRIZZLY	242	
		SA-N-12 GRIZZLY	243	
		SA-18 GROUSE	244	
		SA-19 GRISOM	245	
		RIM-116 RAM	246	
		ADATS	247	
		JAVELIN	248	
		STARBURST	249	
		STARSTREAK	250	
		ASPIDER	251	
		FRONT DOOR	252	
		ROLAND II	253	
		AKASH	254	
		ANZA	255	
		ANZA II	256	
		CSA-1	257	
		CSA-2	258	
		CSA-4	259	
		CSA-5	260	
		FM-80	261	
		HN-5	262	

5.2-532

MIL-STD-6016B

FIELD CODING FOR J12.0C2

(SHEET 80)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	
		NK-7	263	
		NK-16	264	
		PANTZYR	265	
		RAPIER 2000/JERNAS	266	
		RBS-90	267	
		SAKR	268	
		SAVA	269	
		SHANINE	270	
		SKYGUARD ASPIDE	271	
		SPADA	272	
		TAM SAM	273	
		TIGERCAT	274	
		VANGUARD	275	
		SA-N-1 GOA	276	
		SA-N-9 GAUNTLET	277	
		SA-N-10	278	
		ALBATROS/ASPIDE	279	
		SM-1	280	
		SA-2 IRAQ MOD	281	
		SA-2 NORTH KOREA RO	282	
		AEGIS-TI	283	
		MASURGS	284	
		ROCK CAKE	285	
		SEA INDIGO	286	
		TANSAM	287	
		TOKEN A/D	288	
		GUARDSMAN	289	
		SILKWORM	290	
		SNOW DRIFT 11/17	291	
		TIGER S	292	
		TIGER G	293	
		TUBE ARM SA-11	294	
		SEACAT 262/903/904	295	
		AN/MPQ-4	296	
		AN-TPQ-36	297	
		AN/TPS-25	298	
		CYMBERLINE	299	
		PORK TROUGH 1	300	
		RASIT	301	
		SNAR-6	302	
		TALL MIKE	303	
		AN/FPN-33/36/40	304	
		AN/TPN-12/17	305	

5.2-533

MIL-STD-6016B

FIELD CODING FOR J12.0C2

(SHEET 81)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		CPN-4, FPN-16/22	306	
		RP-2E	307	
		RP-4G	308	
		THD-1010/1013	309	
		TPN-8/14/18TSQ-7	310	
		TWO SPOT	311	
		CSA-X-2	312	
		ASR-0	313	
		FALCON-G	314	
		MARCON LN66TPS66	315	
		SHEET BEND	316	
		WALL RUST A/B	317	
		DON-2	318	
		DONKAY/PALM FROND	319	
		EYE SHIELD	320	
		MARELD	321	
		PEEL PAIR	322	
		POT HEAD	323	
		RACAL-DECCA	324	
		RICE FIELD	325	
		RICE SCREEN	326	
		RICE CUP	327	
		SQUARE TIE	328	
		SS-N-2	329	
		STRUT CURVE	330	
		STRUT PAIR	331	
		BOFI	332	
		CORN CAN	333	
		DRUM TILT	334	
		ELDORADO	335	
		FLAP WHEEL	336	
		FLEDERMAUS	337	
		FLYCATCHER	338	
		GEPARD	339	
		GUN DISH	340	
		SPAAMG	341	
		TEAMPLAY	342	
		TEAMWORK	343	
		VULCAN	344	
		9LV 200	345	
		AN/SPG-50	346	
		BASS TILT	347	
		GOALKEEPER	348	

5.2-534

MIL-STD-6016B

FIELD CODING FOR J12.0C2 (SHEET 82)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		HAWK SCREECH	349	
		KITE SCREECH A/B	350	
		OWL SCREECH	351	
		MARK 68 FCS	352	
		MK 57/63 GFCS	353	
		MK-86 GFCS	354	
		MUFF COB	355	
		SIGNAAL STIR 180	356	
		SUN VISOR	357	
		TOP BOW	358	
		TYPE 341	359	
		VEGA	360	
		WM-20 SERIES	361	
		MARCONI S613	362	
		THIN SKIN	363	
		AN/FPS-77	364	
		MRL-1	365	
		MRL-4/5	366	
		BIG BIRD	367	
		SIDE NET	368	
		ODD LOT/PAIR/GROUP	369	
		FIRE WHEEL/MOD	370	
		BARLOCK	371	
		FIRECAN/WHIFF	372	
		GIN SLING	373	
		FRUSKA GORA	374	
		TIN SHIELD	375	
		BIG BAR/MESH	376	
		SS-N-S SCOOP PAIR	377	
		SGR-105 DA-01/00	378	
		CROSS SLOT	379	
		BACK NET/TRAP	380	
		GATE POLE/HIGH/POST	381	
		TOP LOT	382	
		RICE CAKE	383	
		JY-14/9	384	
		TIN TRAP	385	
		HEAD NET A/B/C	386	
		SLIM/SEA/HAIR NET	387	
		LOW SIEVE	388	
		EGG CUP	389	
		CUT WEB	390	
		SKYWATCH	391	

5.2-535

MIL-STD-6016B

FIELD CODING FOR J12.0C2

(SHEET 83)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE -----	(CONTINUED)	
		HALF PLATE	392	
		SKIN HEAD	393	
		SIEVE FAMILY	394	
		SO-A	395	
		HIGH SHELL	396	
		AN/FPS-6/89	397	
		DECCA HF200	398	
		MARCONI 5244	399	
		TYPE 88 MK 1	400	
		MARCONI S-247	401	
		AN/MPN-11	402	
		RAT-31S	403	
		AA4 MK 6/7	404	
		AN/TPS-43	405	
		SCR-584	406	
		AN/TPS-48	407	
		MARCONI S-1006/269	408	
		PALMIER	409	
		FIREFINDER LR	410	
		VOLEX III/IV	411	
		THD-1940	412	
		HADR (HR-3000)	413	
		AN/RPS-70/72/75	414	
		MPDR-18/S	415	
		WATCHMAN	416	
		MARCONI S-631/647	417	
		MARCONI S-706/711/712	418	
		AN/TPS-73	419	
		TRS-22XX	420	
		AN/SPS-8	421	
		DECCA AWS-1	422	
		MK-26	423	
		AN/SPS-48	424	
		RAN-7S	425	
		SEA TIGER	426	
		DA-08/2LS	427	
		AWS-9 (TYPE 996)	428	
		DA-05/00	429	
		MPDR-45	430	
		TOP STEER/PLATE	431	
		STRIKE OUT	432	
		SPONGE CAKE	433	
		NC1 ROLAND	434	

5.2-536

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE -----	(CONTINUED)	
		NC1 MISTRAL	435	
		FDOC	436	
		MCT	437	
		CETAC	438	
		ISARD	439	
		UNDEFINED	440 THROUGH 4000	
		WAYPOINT	4001	
		STRIKE INITIAL POINT	4002	
		UNDEFINED	4003 THROUGH 4093	
		RESET TO NO STATEMENT	4094	
		UNDEFINED	4095	
1861	001	SPECIAL INTEREST INDICATOR -----		THE SPECIAL INTEREST INDICATOR IS USED TO INDICATE THAT THE TRACK IS OF SPECIAL INTEREST.
		NO STATEMENT	0	
		SPECIAL INTEREST	1	THE REFERENCE TN IS OF SPECIAL INTEREST. (A.) IF THIS FIELD IS SET TO ONE AND THE IDENTITY IS FRIEND THIS TRACK IS DEFINED AS A "KILO". (B.) IF THIS FIELD IS SET TO ONE AND THE TRACK ENVIRONMENT/CATEGORY IS AIR AND THE IDENTITY IS SUSPECT, THE TRACK IS DEFINED AS A "ZOMBIE". (C.) IF THIS FIELD IS SET TO ONE AND THE TRACK ENVIRONMENT/CATEGORY IS SURFACE (MARITIME) AND THE IDENTITY IS SUSPECT, THE TRACK IS DEFINED AS A "TRAVELLER". (D.) THE USE OF THIS INDICATOR WITH OTHER IDENTITIES IS YET TO BE DETERMINED.

WORD MAP

WORD NUMBER: J12.0C3

WORD TITLE: POINT LOCATION CONTINUATION WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00	:			
LATITUDE, 0.0013 MINUTE																		:	CONTINUATION WORD				:	WORD	:			
																		:	LABEL				:	FORMAT	:			
																		:					:		:			
23																		:	5				:	2	:			
49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25	:			
LONGITUDE, 0.0013 MINUTE																			:						---	>		
																			:									
24																			:									
		:	69	68	:	67	66	65	64	:	63	62	61	60	59	58	57	56	55	54	:	53	52	51	50	:		
		:	POINT		:																:							
		:	NUMBER	:	POINT TYPE, 1		:	ELEVATION, 25 FT, 1													:						---	>
		:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
		:	2	:	4		:	10													:							

WORD DESCRIPTION

WORD NUMBER: J12.0C3

WORD TITLE: POINT LOCATION CONTINUATION WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	00011
281 015	LATITUDE, 0.0013 MINUTE	7-	29 23	
282 015	LONGITUDE, 0.0013 MINUTE	30-	53 24	
1612 002	ELEVATION, 25 FT, 1	54-	63 10	
363 004	POINT TYPE, 1	64-	67 4	
1657 001	POINT NUMBER	68-	69 2	

FIELD CODING FOR J12.0C3

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
281	015	LATITUDE, 0.0013 MINUTE -----		THE PRECISION IS APPROXIMATELY 8 FEET. IN 90/4,194,303 DEGREE INCREMENTS.
		0 DEGREES	0	
		+90/4,194,303 THROUGH +90 DEGREES NORTH	1 THROUGH 4194303	
		NO STATEMENT	4194304	
		-90 THROUGH -90/4,194,303 DEGREES SOUTH	4194305 THROUGH 8388607	
282	015	LONGITUDE, 0.0013 MINUTE -----		THE PRECISION IS APPROXIMATELY 8 FEET. IN 180/8,388,607 DEGREE INCREMENTS.
		0 DEGREES	0	
		+180/8,388,607 THROUGH +180 DEGREES EAST	1 THROUGH 8388607	
		NO STATEMENT	8388608	
		-180 THROUGH -180/8,388,607 DEGREES WEST	8388609 THROUGH 16777215	
1612	002	ELEVATION, 25 FT, 1 -----		THE ELEVATION IN FEET OF AN OBJECT OR POINT AS MEASURED OUTWARD FROM THE EARTH AS A POSITIVE QUANTITY ABOVE MEAN SEA LEVEL (MSL). IN 25 FOOT INCREMENTS.
		0 THROUGH 25,550 FEET	0 THROUGH 1022	
		NO STATEMENT	1023	
363	004	POINT TYPE, 1 -----		EXPRESSES THE NATURE, KIND, OR CHARACTER OF A POINT.
		NO STATEMENT	0	
		TARGET	1	A POINT THAT INDICATES THE LOCATION OF THE TARGET.
		CLOSEST FRIENDLY	2	A POINT THAT INDICATES THE LOCATION OF THE CLOSEST FRIENDLY FORCES TO THE OBJECTIVE.
		INITIAL POINT	3	A POINT IN SPACE THAT AIRCRAFT RENDEZVOUS OR PASS THROUGH PRIOR TO ATTACKING A TARGET.
		BEACON	4	THE GEOGRAPHIC POSITION OF A BEACON USED AS A REFERENCE POINT FOR BOMBING MISSIONS.
		CONTACT POINT	5	THE POSITION AT WHICH AN AIRCRAFT MAKES RADIO CONTACT WITH AN AIR

5.2-540

MIL-STD-6016B

FIELD CODING FOR J12.0C3

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
363	004	POINT TYPE, 1 -----	(CONTINUED)	
		LASER DESIGNATOR	6	CONTROL AGENCY. THE PRECISE LOCATION OF THE LASER DESIGNATOR.
		MARKER	7	THE POSITION AT WHICH SMOKE, FLARES, TRACERS, PANELS, WHITE PHOSPHORUS MUNITIONS, OR ILLUMINATION ARE BEING UTILIZED AS A MARKER. THE TYPE OF MARKER BEING USED MAY BE PROVIDED BY VOICE.
		POINT	8	THE LOCATION OF A GENERAL POINT THAT WAS NOT REPORTED IN A J3.0 MESSAGE.
		CENTER POINT	9	THE LOCATION OF A POINT THAT INDICATES THE CENTER OF AN AREA REPORTED IN A J3.0 MESSAGE.
		INITIAL ROUTE POINT	10	THE LOCATION OF A POINT THAT INDICATES THE STARTING POINT OF A ROUTE.
		TARGET DEFENSES	11	THE POSITION AT WHICH THE TARGET DEFENSES ARE LOCATION.
		ENGAGEMENT POINT	12	THE ACTUAL OR EXPECTED POINT THAT ORDNANCE IS BEING OR WILL BE DELIVERED AGAINST A GROUND TARGET.
		UNDEFINED	13 THROUGH 14	
		ORIGIN OF BEARING	15	THE POSITION OF THE ORIGIN OF A LINE OF BEARING TARGET.
1657	001	POINT NUMBER -----		THIS FIELD DEFINES THE POINT BEING DESCRIBED AS A START OR STOP POINT IN A SERIES OF POINTS. A NO STATEMENT VALUE INDICATES ONLY ONE POINT IS BEING DESCRIBED OR THE POINT BEING DESCRIBED IS IN BE- TWEEN A START POINT AND A STOP POINT IN A SERIES OF POINTS.
		NO STATEMENT	0	
		START POINT	1	
		STOP POINT	2	
		UNDEFINED	3	

5.2-541

MIL-STD-6016B

WORD MAP

WORD NUMBER: J12.0C4

WORD TITLE: SURFACE ATTACK CONTINUATION WORD

24:	23	22	21	20	19	18	17	16	15:	14	13	12:	11	10	09	08	07:	06	05	04	03	02:	01	00:		
<---	:	RUN IN HEADING								:	TARGET DEFENSES		:	TARGET TYPE				:	CONTINUATION WORD LABEL				:	WORD FORMAT		:
:	:	9								:	3		:	5				:	5				:	2		:
49	48	47:	46	45	44	43	42	41	40	39:	38	37	36	35	34	33:	32	31	30	29	28	27	26	25		
<---	:	TYPE OF STORES								:	NUMBER OF STORES				:	EGRESS HEADING										
:	:	8								:	6				:	9										
					:	69	68	67	66	65:	64	63	62	61	60	59:	58	57:	56	55	54:	53	52	51	50	
					:	HOUR				:	MINUTE				:	SP	:	TIME DISCRETE		:	MODE OF DELIVERY					
					:	5				:	6				:	2	:	3		:	7					

WORD DESCRIPTION

WORD NUMBER: J12.0C4

WORD TITLE: SURFACE ATTACK CONTINUATION WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	00100
889 001	TARGET TYPE	7-	11 5	
890 002	TARGET DEFENSES	12-	14 3	
371 010	RUN IN HEADING	15-	23 9	
371 009	EGRESS HEADING	24-	32 9	
408 036	NUMBER OF STORES	33-	38 6	
1623 005	TYPE OF STORES	39-	46 8	
1658 001	MODE OF DELIVERY	47-	53 7	
1659 001	TIME DISCRETE	54-	56 3	
756 002	SPARE (SP)	57-	58 2	
797 004	MINUTE	59-	64 6	
792 001	HOURL	65-	69 5	

FIELD CODING FOR J12.0C4

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
889	001	TARGET TYPE -----		SPECIFIES THE TYPE TARGET FOR A GROUND STRIKE MISSION.
		NO STATEMENT	0	
		BRIDGE	1	
		PETROLEUM, OIL, AND LUBRICANTS (POL)	2	
		COMMUNICATIONS	3	
		VEHICLES	4	
		CONVOY	5	
		SHIPPING	6	
		DOCK AREA	7	
		TROOPS	8	
		ARMORED VEHICLES	9	
		RAIL	10	
		SURFACE-TO-AIR MISSILE (SAM)	11	
		ANTIAIRCRAFT ARTILLERY (AAA)	12	
		AIR DEFENSES, AIRCRAFT	13	
		ARTILLERY/MORTARS	14	
		PILL BOX/BUNKER	15	
		GUN EMPLACEMENT	16	
		FORTIFICATION	17	
		POWER PLANT	18	
		INDUSTRIAL SITE	19	
		SUPPLY DEPOT	20	
		AIRPORT FACILITIES	21	
		ROAD	22	
		TUNNEL	23	
		DAM	24	
		WARSHIP (LARGE)	25	
		WARSHIP (MEDIUM)	26	
		WARSHIP (SMALL)	27	
		OTHER SURFACE (MARITIME) VESSELS	28	
		AIRBASE	29	
		UNDEFINED	30 THROUGH 31	
890	002	TARGET DEFENSES -----		DESCRIBES THE TYPE OF GROUND DEFENSE IN A TARGET AREA.
		NO STATEMENT	0	
		AIRCRAFT	1	
		SURFACE-TO-AIR MISSILE (SAM)	2	
		NO KNOWN DEFENSES	3	

FIELD CODING FOR J12.0C4

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
890	002	TARGET DEFENSES ----- ANTIAIRCRAFT ARTILLERY (AAA) SMALL ARMS UNDEFINED	(CONTINUED) 4 5 6 THROUGH 7	
371	010	RUN IN HEADING ----- 0 THROUGH 359 DEGREES ILLEGAL NO STATEMENT	0 THROUGH 359 360 THROUGH 510 511	SPECIFIES THE INITIAL POINT (IP) TO TARGET HEADING. IN 1 DEGREE INCREMENTS.
371	009	EGRESS HEADING ----- 0 THROUGH 359 DEGREES ILLEGAL NO STATEMENT	0 THROUGH 359 360 THROUGH 510 511	RECOMMENDED DEPARTURE HEADING FROM THE TARGET. IN 1 DEGREE INCREMENTS.
408	036	NUMBER OF STORES ----- 0 THROUGH 62 UNITS NO STATEMENT	0 THROUGH 62 63	THE NUMBER OF A PARTICULAR TYPE OF STORES TO BE EXPENDED.
1623	005	TYPE OF STORES ----- NO STATEMENT AIM-7 SPARROW AIM-9 SIDEWINDER AIM-54 PHOENIX AGM-45 SHRIKE AGM-65A MAVERICK (TV) AGM-65B MAVERICK (TV) AGM-65D MAVERICK (IR) AGM-65E MAVERICK (LASER MAW) AGM-78 AGM-88 HARM AIM-120 AMRAAM DISUSED DISUSED DISUSED BLU-27 NAPALM DISUSED MK-82 AIR	0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17	LISTS ALL AIR DELIVERABLE ORDNANCE BY OPERATIONS ORDER.

5.2-545

MIL-STD-6016B

FIELD CODING FOR J12.0C4

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1623	005	TYPE OF STORES	(CONTINUED)	

		MK-84 AIR	18	
		CBU-24	19	
		CBU-49	20	
		DISUSED	21	
		CBU-59/B ROCKEYE II	22	
		DISUSED	23	
		CBU-87 CEM	24	
		CBU-89 GATOR	25	
		CBU-90	26	
		CBU-92	27	
		CBU-93	28	
		CBU-421A	29	
		CBU-81B	30	
		GBU-10 PAVEWAY I & II	31	
		(MK-84)		
		GBU-12 PAVEWAY I & II	32	
		(MK-82)		
		GBU-15(V)-4B	33	
		GBU-22B	34	
		DISUSED	35	
		DISUSED	36	
		DISUSED	37	
		DISUSED	38	
		DISUSED	39	
		DISUSED	40	
		MK-24	41	
		MK-33	42	
		MK-36 SEA MINE	43	
		MK-45	44	
		MK-77	45	
		MK-81SE	46	
		MK-82 LD	47	
		MK-82SE SNAKE EYE	48	
		MK-83 GP 1000LB	49	
		MK-84 LD 2000LB	50	
		MK-117 750LB	51	
		ROCKETS (2.75)	52	
		DISUSED	53	
		DISUSED	54	
		AGM-62 WALLEYE	55	
		AGM-62 WALLEYE I (E0)	56	
		1000LB		

5.2-546

MIL-STD-6016B

FIELD CODING FOR J12.0C4

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1623	005	TYPE OF STORES	(CONTINUED)	

		AGM-62 WALLEYE II (ER/	57	
		DL) (EO) 2400LB		
		SKY FLASH	58	
		AIM-132 ASRAAM	59	
		DISUSED	60	
		DISUSED	61	
		ASLAM	62	
		R530	63	
		DISUSED	64	
		S530 SUPER 530F	65	
		ASPIDER	66	
		DISUSED	67	
		SHAFRIR	68	
		DISUSED	69	
		DISUSED	70	
		DISUSED	71	
		AGM-12 BULLPUP	72	
		DISUSED	73	
		AGM-84 HARPOON	74	
		AGM-86C/D CALCM	75	
		MK-86 (BOMB)	76	
		CBU-BL 755	77	
		MW1-KB 44-TOR	78	
		MW1-MKSA-TOR	79	
		KORMORAN	80	
		BLU-1	81	
		CBU-2 C/A	82	
		M 116 A1/A2	83	
		DISUSED	84	
		FLARE-TP 400	85	
		FLARE-ALE 40	86	
		CHF-ALE-40/4	87	
		SEA EAGLE	88	
		R550 MAGIC I	89	
		R550 MAGIC II	90	
		MICA EM	91	
		SUPER 530D (S530D)	92	
		DISUSED	93	
		BDU-33 (PRACTICE BOMB)	94	
		BDU-48 (PRACTICE BOMB)	95	
		BDU-48 (PRACTICE MINE)	96	
		CRV-7 UNGUIDED ROCKET	97	
		MK-76	98	

5.2-547

MIL-STD-6016B

FIELD CODING FOR J12.0C4

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1623	005	TYPE OF STORES	(CONTINUED)	

		MK-106 (PRACTICE BOMB)	99	
		BL-755	100	
		CBU-78 GATOR MINE	101	
		GBU-16	102	
		GBU-24	103	
		GBU-27 (LG BLU-109)	104	
		GBU-28 (LG BLU-113)	105	
		LGTR	106	
		JSOW (TRAINING)	107	
		AGM-154 JSOW (BLU-97)	108	
		AGM-154 JSOW (BLU-108)	109	
		AGM-154 JSOW (UNITARY)	110	
		JDAM (TRAINING)	111	
		GBU-31 JDAM (BLU-109)	112	
		GBU-31 JDAM (MK-84)	113	
		AGM-65F MAVERICK (IR	114	
		MAW)		
		AGM-65G MAVERICK (IR	115	
		MAW)		
		AGM-84E SLAM	116	
		AGM-84H SLAM-ER	117	
		ATM-84 HARPOON	118	
		(TRAINING)		
		TALD	119	
		LUU-2	120	
		MJU-27	121	
		MJU-37	122	
		MK-58	123	
		MK-40 SEA MINE (1000LB)	124	
		MK-41 SEA MINE (2000LB)	125	
		MK-52 SEA MINE (1200LB)	126	
		MK-55 SEA MINE (2100LB)	127	
		MK-56 SEA MINE (2200LB)	128	
		DISUSED	129	
		DISUSED	130	
		MK-63	131	
		MK-64 SEA MINE	132	
		MK-65 SEA MINE	133	
		DISUSED	134	
		DISUSED	135	
		M129 2000LB LEAFLET/	136	
		CHAFF		

5.2-548

MIL-STD-6016B

FIELD CODING FOR J12.0C4

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1623	005	TYPE OF STORES -----	(CONTINUED)	
		AIM-9X HIGH OFF-BORESIGHT	137	
		IRIS-T (AIM SHORT RANGE)	138	
		BDU-50 (PRACTICE BOMB)	139	
		BLU-109 2000LB PENETRATOR	140	
		MATRA-250 AG	141	
		MC-1 AG	142	
		AGM-130 POWERED STANDOFF WEAPON	143	
		AGM-142 HAVE NAP	144	
		AGM-158 JASSM	145	
		CBU-103 WCMD-CEM	146	
		CBU-104 WCMD-GATOR	147	
		CBU-105 WCMD-SFW	148	
		GBU-37 GAM 5000LB	149	
		MICA IR	150	
		AS30 LASER	151	
		GBU-XX PAVEWAY II (MK-81)	152	
		KORMORAN II	153	
		CBU-97 SFW	154	
		EGBU-27	155	
		EGBU-28	156	
		UNDEFINED	157 THROUGH 255	
1658	001	MODE OF DELIVERY -----		
		CODING TO BE DETERMINED	0 THROUGH 127	
1659	001	TIME DISCRETE -----		VALUES THAT AMPLIFY OR DESCRIBE THE HOUR AND MINUTE FIELD APPLICATION.
		NO STATEMENT	0	
		TIME ON TARGET	1	
		ILLUMINATION ON	2	
		INITIAL POINT TIME	3	
		CHANGED TIME ON TARGET	4	
		UNDEFINED	5 THROUGH 7	
797	004	MINUTE -----		THE MINUTE OF THE HOUR.
		0 THROUGH 59	0 THROUGH 59	IN ONE MINUTE INCREMENTS.
		ILLEGAL	60 THROUGH 62	

5.2-549

MIL-STD-6016B

FIELD CODING FOR J12.0C4 (SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
797	004	MINUTE -----	(CONTINUED)	
		NO STATEMENT	63	
792	001	HOUR ----		EXPRESSES TIME OF DAY OR A PERIOD OF TIME IN HOURS.
		0 HOUR	0	
		1 THROUGH 23 HOURS	1 THROUGH 23	
		ILLEGAL	24 THROUGH 30	IN ONE HOUR INCREMENTS.
		NO STATEMENT	31	

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: BOMBING CONTINUATION WORD

<---	:		:	CONTINUATION WORD	:	WORD	:
	:	TARGET RANGE	:	LABEL	:	FORMAT	:
	:		:		:		:
	:	15	:	5	:	2	:

: : : :	: ELEVATION, : LSBS	: LON: LAT: : LSB: LSB:	: : : :	: : : :
SPARE			BEACON CODE	---
6	3	1 1	6	

WORD DESCRIPTION

WORD NUMBER: J12.0C5
WORD TITLE: BOMBING CONTINUATION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	01
1551	001	CONTINUATION WORD LABEL	2-	6 5	00101
	757	015 TARGET RANGE	7-	21 15	
	372	018 TARGET BEARING	22-	37 16	
1660	001	DELTA ELEVATION	38-	52 15	
1628	001	BEACON CODE	53-	58 6	
	281	001 LATITUDE, LSB (LAT LSB)	59	1	USED WITH J12.0C3 BITS 7-29 TO INCREASE THE PRECISION TO APPROXIMATELY 4 FEET.
	282	001 LONGITUDE, LSB (LON LSB)	60	1	USED WITH J12.0C3 BITS 30-53 TO INCREASE THE PRECISION TO APPROXIMATELY 4 FEET.
1612	003	ELEVATION, LSBS	61-	63 3	
	756	006 SPARE	64-	69 6	

FIELD CODING FOR J12.0C5

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
757	015	TARGET RANGE ----- 0 THROUGH 32,766 FEET NO STATEMENT	0 THROUGH 32766 32767	THE DISTANCE BETWEEN THE BEACON AND THE TARGET. IN ONE FOOT INCREMENTS.
372	018	TARGET BEARING ----- 0 THROUGH 359 99/100 DEGREES ILLEGAL NO STATEMENT	0 THROUGH 35999 36000 THROUGH 65534 65535	TARGET BEARING REFERENCED IS TO TRUE NORTH. IN 1/100 OF A DEGREE INCREMENTS.
1660	001	DELTA ELEVATION ----- 0 THROUGH 16,383 FEET NO STATEMENT -16,383 THROUGH -1 FEET	0 THROUGH 16383 16384 16385 THROUGH 32767	THE DIFFERENCE IN VERTICAL DISTANCE FROM A BEACON TO A TARGET. IN ONE FOOT INCREMENTS.
1628	001	BEACON CODE ----- CODING TO BE DETERMINED	0 THROUGH 63	
281	001	LATITUDE, LSB ----- 0 DEGREES +90/8,388,607 THROUGH +90 DEGREES NORTH NO STATEMENT -90 THROUGH -90/8,388,607 DEGREES SOUTH	0 1 THROUGH 8388607 8388608 8388609 THROUGH 16777215	USED IN CONJUNCTION WITH A LATITUDE FIELD TO DOUBLE THE PRECISION OF THE FIELD. IN 90/8,388,607 DEGREE INCREMENTS.
282	001	LONGITUDE, LSB ----- 0 DEGREES +180/16,777,215 THROUGH +180 DEGREES EAST NO STATEMENT	0 1 THROUGH 16777215 16777216	USED IN CONJUNCTION WITH A LONGITUDE FIELD TO DOUBLE THE PRECISION OF THE FIELD. IN 180/16,777,215 DEGREE INCREMENTS.

5.2-554

MIL-STD-6016B

FIELD CODING FOR J12.0C5 (SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
282	001	LONGITUDE, LSB ----- -180 THROUGH -180/16,777,215 DEGREES WEST	(CONTINUED) 16777217 THROUGH 33554431	
1612	003	ELEVATION, LSBS ----- 0 THROUGH 51,193.750 FEET ELEVATION UNKNOWN 0 THROUGH 25,593.75 FEET NO STATEMENT	0 THROUGH 16383 16384 0 THROUGH 8190 8191	USED IN CONJUNCTION WITH ANOTHER ELEVATION FIELD TO INCREASE THE PRECISION OF THE FIELD. IN 25/8 FOOT INCREMENTS. IN 25/8 FOOT INCREMENTS.

.....

WORD TITLE: TARGETING CONTINUATION WORD

CONTINUATION WORD	WORD	WORD
LABEL	FORMAT	
---	LASER ILLUMINATOR CODE	
	16	2

<---	:	:
	:	: INDEX NUMBER, RELATED
	:	:
	:	:

	:	:
	:	: 6
	:	:
	:	:
	:	: TRACK NUMBER, RELATED 3
	:	:
	:	:
	:	: 19
	:	:

SPARE

22

WORD DESCRIPTION

WORD NUMBER: J12.0C6

WORD TITLE: TARGETING CONTINUATION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT #		RESOLUTION, CODING, ETC
			POSITION	BITS	
1550 001		WORD FORMAT	0-	1 2	01
1551 001		CONTINUATION WORD LABEL	2-	6 5	00110
1676 001		LASER ILLUMINATOR CODE	7-	22 16	
769 043		TRACK NUMBER, RELATED 3	23-	41 19	
768 010		INDEX NUMBER, RELATED	42-	47 6	
756 022		SPARE	48-	69 22	

FIELD CODING FOR J12.0C6

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1676	001	LASER ILLUMINATOR CODE -----		A FOUR DIGIT CODE USED BY LASER DESIGNATORS AND LASER WEAPONS. THE SIXTEEN BITS ARE DIVIDED INTO FOUR GROUPS OF FOUR BITS. EACH GROUP IS INTERPRETED INDEPENDENTLY.
		0 THROUGH 9 ILLEGAL	0 THROUGH 9 10 THROUGH 15	
769	043	TRACK NUMBER, RELATED 3 -----		THE TRACK NUMBER OF THE TARGET THAT IS RELATED TO THE OBJECTIVE TN IN THE MESSAGE.
		00000	0	NO STATEMENT.
		00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		00077	63	ILLEGAL.
		00100-00175	64 THROUGH 125	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		00176	126	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		00177	127	COLLECTIVE ADDRESS.
		00200-07776	128 THROUGH 4094	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		07777	4095	ILLEGAL.
		0A000-0Z777	4096 THROUGH 16383	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		10000-17777	16384 THROUGH 20479	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		20000-27777	32768 THROUGH 36863	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.

5.2-558

MIL-STD-6016B

FIELD CODING FOR J12.0C6

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	043	TRACK NUMBER, RELATED 3 -----	(CONTINUED)	
		2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		70000-77776	114688 THROUGH 118782	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL

5.2-559

MIL-STD-6016B

FIELD CODING FOR J12.0C6 (SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	043	TRACK NUMBER, RELATED 3 -----	(CONTINUED)	
		77777	118783	INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS. ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
768	010	INDEX NUMBER, RELATED -----		THE INDEX NUMBER OF THE TARGET RELATED TO THE INDEX NUMBER IN THE MESSAGE.
		NO STATEMENT	0	
		NUMERIC	1 THROUGH 63	A VALUE ASSIGNED BY THE ORIGINATOR TO DIFFERENTIATE AMONG SENSOR TARGET REPORTS.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: THIRD PARTY CONTINUATION WORD

49	48	47	46	45	44	43:	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28:	27	26	25
						:	ELEVATION ANGLE, 2														:	INDEX		
<---						:															:	NUMBER,		
						:															:	THIRD PARTY		
						:	15														:	6		

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50
:																				
:																				
:											SPARE									
:																				
:											27									

WORD DESCRIPTION

WORD NUMBER: J12.0C7

WORD TITLE: THIRD PARTY CONTINUATION WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	00111
769 042	TRACK NUMBER, INDEX ORIGINATOR	7-	21 15	
768 001	INDEX NUMBER, THIRD PARTY	22-	27 6	
428 003	ELEVATION ANGLE, 2	28-	42 15	
756 027	SPARE	43-	69 27	

FIELD CODING FOR J12.0C7

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	042	TRACK NUMBER, INDEX ORIGINATOR -----		THE TN OF THE UNIT ORIGINATING THE INDEX NUMBER, THIRD PARTY.
		NO STATEMENT	0	
		NUMERIC	00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		ILLEGAL	00077 (OCTAL)	
		NUMERIC	00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC	00177 (OCTAL)	COLLECTIVE ADDRESS.
		NUMERIC	00200 THROUGH 07776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL	07777 (OCTAL)	
		NUMERIC	10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
768	001	INDEX NUMBER, THIRD PARTY -----		THE INDEX NUMBER OF THE TARGET ASSIGNED BY THE INDEX ORIGINATOR.
		NO STATEMENT	0	
		NUMERIC	1 THROUGH 63	A VALUE ASSIGNED BY THE ORIGINATOR TO DIFFERENTIATE AMONG SENSOR TARGET REPORTS.
428	003	ELEVATION ANGLE, 2 -----		EXPRESSES ANGULAR ELEVATION MEASURED FROM THE HORIZONTAL. ABOVE HORIZONTAL ANGLES ARE POSITIVE. BELOW HORIZONTAL ANGLES ARE NEGATIVE. THE ORIGIN OF THE ANGLE IS SPECIFIED BY THE LATITUDE AND LONGITUDE FIELDS IN J12.7I AND THE ANGLE ORIGIN ALTITUDE FIELD IN J12.7E0.
		0 THROUGH 89.994507 DEGREES	0 THROUGH 16383	
		NO STATEMENT	16384	

5.2-564

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
428	003	ELEVATION ANGLE, 2	(CONTINUED)	

		-89.994507 THROUGH	16385 THROUGH 32767	
		-0.005493 DEGREES		

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

J12.1 MESSAGE SUMMARY

PURPOSE

The J12.1 Vector Message is used by C² JUs to send vector information and vector discretetes specifically to air units operating on its net. Vectors are given for interception of air targets, navigation, and air traffic control.

DATA ELEMENT SUMMARY

<u>J12.1I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
TRACK NUMBER, ADDRESSEE	15
COURSE	9
SPARE	3
ALTITUDE, 25 FT	13
VECTOR DISCRETE	6
SPEED	11

<u>J12.1E0</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
TIME TO INTERCEPT	8
SPARE	51
RECEIPT/COMPLIANCE	5
RECURRENCE RATE, RECEIPT/ COMPLIANCE	4

MIL-STD-6016B

J12.1 TRANSMIT/RECEIVE RULES

TITLE: Vector Message

TRANSMIT RULES

The J12.1 Vector message shall be transmitted to an aircraft only by its controlling unit. Table J12-3 indicates word sequences, R/C values, message priorities, and periodic update rates for each Vector Discrete value. Transmission of the J12.1 message with the various R/C values set shall be in accordance with procedures specified in paragraph 4.1.7.

RECEIVE RULES

There are no receive rules specified for this message.

TABLE J12-3. J12.1 Required Word Sequences and Receipt/Compliance Values and Periodic Update Rates for Discrete Values (Sheet 1 of 5)

VECTOR DISCRETE VALUE	J12.1 WORD SEQ ⁴ REQ		R/C VAL ¹	MSG PRI ²	PERIODIC UPDATE RATE (RRN)	VECTOR DISCRETE VALUE DESCRIPTOR ³
	I	E0				
0 - NO STATEMENT	X		N/A	R	N/A	
1 - TO WAYPOINT	X		N/A	R	N/A	A VECTOR TO A WAYPOINT IN SPACE AT WHICH THE VECTOR DATA WILL CHANGE.
-- OR --						
TO WAYPOINT	X	X	0 OR 5	R	N/A	A VECTOR TO A WAYPOINT IN SPACE AT WHICH THE VECTOR DATA WILL CHANGE.
2 - ALTITUDE CHANGE WARNING	X		N/A	R	8(3 SECS)	AN ALERT TO THE PILOT THAT HIS ASSIGNED ALTITUDE HAS CHANGED. THIS MESSAGE IS TRANSMITTED TWICE.
3 - SPEED CHANGE WARNING	X		N/A	R	8(3 SECS)	AN ALERT TO THE PILOT THAT HIS ASSIGNED SPEED HAS CHANGED. THIS MESSAGE IS TRANSMITTED TWICE.
4 - COURSE CHANGE WARNING	X		N/A	R	8(3 SECS)	AN ALERT TO THE PILOT THAT HIS ASSIGNED COURSE HAS CHANGED. THIS MESSAGE IS TRANSMITTED TWICE.
5 - COMMAND CONTROL	X	X	0 OR 5	R	N/A	PROVIDES VECTOR INFORMATION THAT IS MANDATORY FOR THE AIRCRAFT.
6 - UNDEFINED	-	-	-	-	-	-
7 - REVERT TO VOICE	X	X	0 OR 5	R	N/A	ORDERS THE AIRCRAFT TO ESTABLISH VOICE CONTACT WITH ITS CONTROLLING AGENCY.
8 - LANDING CHECKLIST	X		N/A	R	N/A	AN ALERT TO THE PILOT THAT THE LANDING CHECKLIST SHOULD BE COMPLETED.
9 - COMMAND COURSE CHANGE	X	X	0 OR 5	R	N/A	ORDERS A COURSE CHANGE THAT IS MANDATORY.
10 - COMMAND ALTITUDE CHANGE	X	X	0 OR 5	R	N/A	ORDERS AN ALTITUDE CHANGE THAT IS MANDATORY.

TABLE J12-3. J12.1 Required Word Sequences and Receipt/Compliance Values and Periodic Update Rates for Discrete Values (Sheet 2 of 5)

VECTOR DISCRETE VALUE	J12.1 WORD SEQ ⁴ REQ		R/C VAL ¹	MSG PRI ²	PERIODIC UPDATE RATE (RRN)	VECTOR DISCRETE VALUE DESCRIPTOR ³
	I	E0				
11 - COMMAND SPEED CHANGE	X	X	0 OR 5	R	N/A	ORDERS A SPEED CHANGE THAT IS MANDATORY.
12 - BUG-OUT HEADING	X		N/A	R	8(3 SECS)	PROVIDES A VECTOR THAT MAY BE USED TO DEPART THE AREA. THIS MESSAGE IS TRANSMITTED TWICE.
13 - CV RECOVERY CASE I	X		N/A	R	N/A	A BROADCAST MESSAGE TO THE COLLECTIVE ADDRESSEE TN OF 00177 (OCTAL) INDICATING THAT THE APPROACH AND RECOVERY ROUTES TO THE AIRCRAFT CARRIER ARE UNDER VISUAL METEOROLOGICAL CONDITIONS.
-- OR --						
CV RECOVERY CASE I	X	X	0 OR 5	R	N/A	AN ADDRESSED MESSAGE TO A SPECIFIC AIRCRAFT INDICATING THAT THE APPROACH AND RECOVERY ROUTES TO THE AIRCRAFT CARRIER ARE UNDER VISUAL METEOROLOGICAL CONDITIONS.
14 - CV RECOVERY CASE II	X		N/A	R	N/A	A BROADCAST MESSAGE TO THE COLLECTIVE ADDRESSEE TN OF 00177 (OCTAL) INDICATING THAT THE APPROACH AND RECOVERY ROUTES TO THE AIRCRAFT CARRIER ARE VARYING BETWEEN INSTRUMENT METEOROLOGICAL CONDITIONS AND VISUAL METEOROLOGICAL CONDITIONS.
-- OR --						
CV RECOVERY CASE II	X	X	0 OR 5	R	N/A	AN ADDRESSED MESSAGE TO A SPECIFIC AIRCRAFT INDICATING THAT THE APPROACH AND RECOVERY ROUTES TO THE AIRCRAFT CARRIER ARE VARYING BETWEEN INSTRUMENT METEOROLOGICAL CONDITIONS AND VISUAL METEOROLOGICAL CONDITIONS.

TABLE J12-3. J12.1 Required Word Sequences and Receipt/Compliance Values and Periodic Update Rates for Discrete Values (Sheet 3 of 5)

VECTOR DISCRETE VALUE	J12.1 WORD SEQ ⁴ REQ		R/C VAL ¹	MSG PRI ²	PERIODIC UPDATE RATE (RRN)	VECTOR DISCRETE VALUE DESCRIPTOR ³
	I	E0				
15 - CV RECOVERY CASE III	X		N/A	R	N/A	A BROADCAST MESSAGE TO THE COLLECTIVE ADDRESSEE TN OF 00177 (OCTAL) INDICATING THAT THE APPROACH AND RECOVERY ROUTES TO THE AIRCRAFT CARRIER ARE UNDER INSTRUMENT METEOROLOGICAL CONDITIONS.
-- OR --						
CV RECOVERY CASE III	X	X	0 OR 5	R	N/A	AN ADDRESSED MESSAGE TO A SPECIFIC AIRCRAFT INDICATING THAT THE APPROACH AND RECOVERY ROUTES TO THE AIRCRAFT CARRIER ARE UNDER INSTRUMENT METEOROLOGICAL CONDITIONS.
16 - FIELD CONDITION VMC	X		N/A	R	N/A	A BROADCAST MESSAGE TO THE COLLECTIVE ADDRESSEE TN OF 00177 (OCTAL) INDICATING THAT THE AIRCRAFT'S DESTINATION FIELD IS UNDER VISUAL METEOROLOGICAL CONDITIONS.
-- OR --						
FIELD CONDITION VMC	X	X	0 OR 5	R	N/A	AN ADDRESSED MESSAGE TO A SPECIFIC AIRCRAFT INDICATING THAT THE AIRCRAFT'S DESTINATION FIELD IS UNDER VISUAL METEOROLOGICAL CONDITIONS.
17 - FIELD CONDITION IMC	X		N/A	R	N/A	A BROADCAST MESSAGE TO THE COLLECTIVE ADDRESSEE TN OF 00177 (OCTAL) INDICATING THAT THE AIRCRAFT'S DESTINATION FIELD IS UNDER INSTRUMENT METEOROLOGICAL CONDITIONS.
-- OR --						
FIELD CONDITION IMC	X	X	0 OR 5	R	N/A	AN ADDRESSED MESSAGE TO A SPECIFIC AIRCRAFT INDICATING THAT THE AIRCRAFT'S DESTINATION FIELD IS UNDER INSTRUMENT METEOROLOGICAL CONDITIONS.

5.2-571

MIL-STD-6016B

TABLE J12-3. J12.1 Required Word Sequences and Receipt/Compliance Values and Periodic Update Rates for Discrete Values (Sheet 4 of 5)

VECTOR DISCRETE VALUE	J12.1 WORD SEQ ⁴ REQ		R/C VAL ¹	MSG PRI ²	PERIODIC UPDATE RATE (RRN)	VECTOR DISCRETE VALUE DESCRIPTOR ³
	I	E0				
18 - JOIN UP/RENDEZVOUS	X	X	0 OR 5	R	N/A	AN ADDRESSED MESSAGE TO A SPECIFIC AIRCRAFT ORDERING IT TO JOIN UP/RENDEZVOUS.
19 - NOT UNDER COMMAND	X	X	0 OR 5	R	N/A	THE ADDRESSED AIRCRAFT IS NO LONGER BEING VECTORED BY THE SOURCE TN. IGNORE ALL CURRENTLY HELD COURSE, ALTITUDE, AND SPEED DATA UNTIL SUBSEQUENT COMMAND. THE SOURCE TN STILL RETAINS CONTROL OVER THE ADDRESSED AIRCRAFT.
20 - UNDEFINED	-	-	-	-	-	-
21 - VISUAL/ID TARGET VECTOR	X		N/A	R	8(3 SECS)	PROVIDES A VECTOR TO PERFORM A VISUAL INVESTIGATION OR IDENTIFICATION OF A TARGET. THIS MESSAGE IS TRANSMITTED TWICE.
-- OR -- VISUAL/ID TARGET VECTOR	X	X	0 OR 5	R	N/A	PROVIDES A VECTOR TO PERFORM A VISUAL INVESTIGATION OR IDENTIFICATION OF A TARGET.
22 - COLLISION/CUTOFF VECTOR	X		N/A	R	8(3 SECS)	PROVIDES A VECTOR FOR A NEAREST COLLISION INTERCEPT TO A TARGET. THIS MESSAGE IS TRANSMITTED TWICE.
-- OR -- COLLISION/CUTOFF VECTOR	X	X	0 OR 5	R	N/A	PROVIDES A VECTOR FOR A NEAREST COLLISION INTERCEPT TO A TARGET.

TABLE J12-3. J12.1 Required Word Sequences and Receipt/Compliance Values and Periodic Update Rates for Discrete Values (Sheet 5 of 5)

VECTOR DISCRETE VALUE	J12.1 WORD SEQ ⁴ REQ		R/C VAL ¹	MSG PRI ²	PERIODIC UPDATE RATE (RRN)	VECTOR DISCRETE VALUE DESCRIPTOR ³
	I	E0				
23 - PURSUIT VECTOR	X		N/A	R	8(3 SECS)	PROVIDES A VECTOR FOR PLACING THE AIRCRAFT IN A POSITION TO PURSUE THE TARGET TO AN INTERCEPT. THIS MESSAGE IS TRANSMITTED TWICE.
-- OR --						
PURSUIT VECTOR	X	X	0 OR 5	R	N/A	PROVIDES A VECTOR FOR PLACING THE AIRCRAFT IN A POSITION TO PURSUE THE TARGET TO AN INTERCEPT.
24 - STERN VECTOR	X		N/A	R	8(3 SECS)	PROVIDES A VECTOR FOR PLACING THE AIRCRAFT IN A REAR HEMISPHERE APPROACH TO THE TARGET. THIS MESSAGE IS TRANSMITTED TWICE.
-- OR --						
STERN VECTOR	X	X	0 OR 5	R	N/A	PROVIDES A VECTOR FOR PLACING THE AIRCRAFT IN A REAR HEMISPHERE APPROACH TO THE TARGET.
25 - ORBIT VECTOR	X	X	0 OR 5	R	N/A	PROVIDES A VECTOR TO AN ORBIT POSITION.
26 - REFUEL VECTOR	X	X	0 OR 5	R	N/A	PROVIDES A VECTOR TO A REFUELING STATION.
27-63 - UNDEFINED	-	-	-	-	-	-

NOTES

1. The initial transmission of the message requires the receipt/compliance field set to the value indicated in the column.
2. The message priority is as indicated in the column. P = Priority, R = Routine.
3. The various word sequences of the J12.0 message shall be used in conjunction with the J12.1 message to define the target location, designator location, requested stores and tactics to be utilized.
4. See Transmit rules for use of the J12.1E0 word.

.....

WORD TITLE: VECTOR INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00		
TRACK NUMBER, ADDRESSEE												:	MESSAGE		:	SUBLABEL,		:	LABEL, J-SERIES				:	WORD		:
												:	LENGTH		:	J-SERIES		:					:	FORMAT		:
												:	INDICATOR		:			:					:			:
15												:	3		:	3		:	5				:	2		:

49	48	47	46	45	44	43	42	41	40:	39	38	37:	36	35	34	33	32	31	30	29	28:	27	26	25	
ALTITUDE, 25 FT										:	SPARE			:	COURSE							:	----		
13										:	3			:	9							:			

:	69	68	67	66	65	64	63	62	61	60	59:	58	57	56	55	54	53:	52	51	50	
:											:	VECTOR DISCRETE							:		
:	SPEED										:								:	---	
:											:								:		
:	11										:	6							:		

WORD DESCRIPTION

WORD NUMBER: J12.1I
WORD TITLE: VECTOR INITIAL WORD

REFERENCE		BIT #		RESOLUTION, CODING, ETC
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	
1550 001	WORD FORMAT	0-	1 2	00
270 004	LABEL, J-SERIES	2-	6 5	01100
271 005	SUBLABEL, J-SERIES	7-	9 3	001
800 001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
769 006	TRACK NUMBER, ADDRESSEE	13-	27 15	
371 015	COURSE	28-	36 9	
756 003	SPARE	37-	39 3	
365 033	ALTITUDE, 25 FT	40-	52 13	
1651 001	VECTOR DISCRETE	53-	58 6	
367 018	SPEED	59-	69 11	

FIELD CODING FOR J12.1I

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	006	TRACK NUMBER, ADDRESSEE -----		THE TN OF A UNIT (I.E., JU OR PU) TO WHICH A MESSAGE IS ADDRESSED.
		NO STATEMENT NUMERIC	0 00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		ILLEGAL NUMERIC	00077 (OCTAL) 00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC	00177 (OCTAL)	COLLECTIVE ADDRESS.
		NUMERIC	00200 THROUGH 07776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL NUMERIC	07777 (OCTAL) 10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
371	015	COURSE -----		INDICATES THE DIRECTION OF TRAVEL OF AN OBJECT IN DEGREES WITH RESPECT TO TRUE NORTH.
		0 THROUGH 359 DEGREES ILLEGAL NO STATEMENT	0 THROUGH 359 360 THROUGH 510 511	IN 1 DEGREE INCREMENTS.
365	033	ALTITUDE, 25 FT -----		EXPRESSES ALTITUDE AS MEASURED OUT- WARD FROM THE EARTH AS A POSITIVE QUANTITY ABOVE MEAN SEA LEVEL (MSL) IN FEET.
		0 THROUGH 204,750 FEET ALTITUDE UNKNOWN	0 THROUGH 8190 8191	IN 25 FEET INCREMENTS.
1651	001	VECTOR DISCRETE -----		DISCRETES TO ADVISE OR DIRECT A PILOT.
		NO STATEMENT	0	
		TO WAYPOINT	1	
		ALTITUDE CHANGE WARNING	2	
		SPEED CHANGE WARNING	3	

5.2-576

MIL-STD-6016B

FIELD CODING FOR J12.1I

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1651	001	VECTOR DISCRETE	(CONTINUED)	

		COURSE CHANGE WARNING	4	
		COMMAND CONTROL	5	
		UNDEFINED	6	
		REVERT TO VOICE	7	
		LANDING CHECKLIST	8	
		COMMAND COURSE CHANGE	9	
		COMMAND ALTITUDE CHANGE	10	
		COMMAND SPEED CHANGE	11	
		BUG-OUT HEADING	12	
		CV RECOVERY CASE I	13	
		CV RECOVERY CASE II	14	
		CV RECOVERY CASE III	15	
		FIELD CONDITION VMC	16	
		FIELD CONDITION IMC	17	
		JOIN UP/RENDEZVOUS	18	
		NOT UNDER COMMAND	19	
		UNDEFINED	20	
		VISUAL/ID TARGET VECTOR	21	
		COLLISION/CUT OFF VECTOR	22	
		PURSUIT VECTOR	23	
		STERN VECTOR	24	
		ORBIT VECTOR	25	
		REFUEL VECTOR	26	
		UNDEFINED	27 THROUGH 63	
367	018	SPEED		THE RATE OF CHANGE OF POSITION.

		0 THROUGH 4092 DATA	0 THROUGH 2046	EXPRESSES GROUND SPEED IN 2 DATA
		MILES PER HOUR		MILES PER HOUR INCREMENTS.
		NO STATEMENT	2047	

5.2-577

MIL-STD-6016B

.....

WORD TITLE: VECTOR EXTENSION WORD

<---

49 48 47 46 45 44 43 42 41 40 39 38 37 36 35 34 33 32 31 30 29 28 27 26 25

CDABF

```

: RECURRENT :
:RATE, RECEIPT/ :RECEIPT/COMPLIANCE :
: COMPLIANCE :

```

WORD DESCRIPTION

WORD NUMBER: J12.1E0
WORD TITLE: VECTOR EXTENSION WORD

REFERENCE		BIT #		RESOLUTION, CODING, ETC
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	
1550 001	WORD FORMAT	0-	1 2	10
387 023	TIME TO INTERCEPT (TT INT)	2-	9 8	
756 051	SPARE	10-	60 51	
392 008	RECEIPT/COMPLIANCE	61-	65 5	
444 025	RECURRENCE RATE, RECEIPT/ COMPLIANCE (RRN R/C)	66-	69 4	

FIELD CODING FOR J12.1E0

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
387	023	TIME TO INTERCEPT -----		THE TIME REMAINING UNTIL THE ADDRESSEE TN WILL COMPLETE THE INTERCEPT.
		0 THROUGH 254 SECONDS NO STATEMENT	0 THROUGH 254 255	IN ONE SECONDS INCREMENTS.
392	008	RECEIPT/COMPLIANCE -----		
		ORIGINAL ORDER	0	RECEIPT/COMPLIANCE RESPONSE REQUIRED.
		ORIGINAL ORDER	1	RECEIPT/COMPLIANCE RESPONSE NOT REQUIRED. MUST BE USED IN CONJUNCTION WITH ORIGINAL ORDER MESSAGES ADDRESSED TO COLLECTIVE ADDRESSES. THE ORIGINAL ORDER SHALL BE TRANSMITTED 3 TIMES.
		MACHINE RECEIPT	2	MESSAGE RECEIVED ERROR FREE.
		WILCO (WILL COMPLY)	3	THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER WILL COMPLY. IN THIS USAGE, THE SYSTEM COMPONENT IS A HUMAN OPERATOR OR (UNMANNED VEHICLE ONLY) A MACHINE.
		HAVCO (HAVE COMPLIED)	4	THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER HAS COMPLIED. IN THIS USAGE, THE SYSTEM COMPONENT MAY BE A HUMAN OPERATOR OR A MACHINE.
		ORIGINAL ORDER	5	RECEIPT/COMPLIANCE RESPONSE (MR AND/OR CANTPRO ONLY) REQUIRED.
		CANTCO (CANNOT COMPLY)	6	THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER CANNOT COMPLY. IN THIS USAGE, THE SYSTEM COMPONENT IS A HUMAN OPERATOR OR (UNMANNED VEHICLE ONLY) A MACHINE.
		CANTPRO (CANNOT PROCESS)	7	NON-SPECIFIC SYSTEM LIMITATION OR CONFLICT. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	8	TIME SLOT ASSIGNMENT CONFLICT DETECTED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND

5.2-580

MIL-STD-6016B

FIELD CODING FOR J12.1E0

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

392	008	RECEIPT/COMPLIANCE	(CONTINUED)	
-----	-----	--------------------	-------------	--

CANTPRO (CANNOT PROCESS) 9

CANTPRO (CANNOT PROCESS) 10

CANTPRO (CANNOT PROCESS) 11

CANTPRO (CANNOT PROCESS) 12

CANTPRO (CANNOT PROCESS) 13

CANTPRO (CANNOT PROCESS) 14

THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.

CRYPTOVARIABLE NOT HELD. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.

PARTICIPATION GROUP NOT DEFINED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.

APPLICABLE ASSIGNMENT TABLE FULL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.

RELAY FUNCTION SPECIFIED ALREADY HAS ASSIGNED TIME SLOT BLOCKS FOR WHICH A DIFFERENT RELAY MODE/NET NUMBER HAS BEEN SPECIFIED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.

INTERFERENCE PROTECTION FEATURES WOULD BE VIOLATED BY ACCEPTANCE OF ASSIGNMENT. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.

HOST SUBSCRIBER INTERFACE IS INACTIVE AND MESSAGE IS NOT

5.2-581

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
		CANTPRO (CANNOT PROCESS)	15	PROCESSED BY THE TERMINAL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	16	TN, ADDRESSEE DOES NOT IMPLEMENT THE ACTION REQUESTED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	17	ONE OR MORE TNS IN THE OM NOT HELD. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	18	TN, REFERENCE OR TN, FRIENDLY WEAPON IS UNDER OWN UNIT CONTROL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	19	UNIT NOT EXERCISING AIR CONTROL CAPABILITY. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	20	UNACCEPTABLE IDENTITY. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
				ADDRESSEE TN IS INACTIVE. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT

5.2-582

MIL-STD-6016B

FIELD CODING FOR J12.1E0

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
		CANTPRO (CANNOT PROCESS)	21	BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED. THE FORWARDING UNIT DID NOT RECEIVE A MACHINE RECEIPT FROM THE ADDRESSEE TN. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	22	TN, REFERENCE OR TN, FRIENDLY WEAPON IS NOT UNDER THIS UNIT'S CONTROL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		UNDEFINED NO STATEMENT	23 THROUGH 30 31	
444	025	RECURRENCE RATE, RECEIPT/ COMPLIANCE -----		IDENTIFIES THE TIME SLOT IN WHICH THE RECEIPT/COMPLIANCE FOR THE MESSAGE IS TO BE TRANSMITTED.
		NO STATEMENT NUMERIC	0 1 THROUGH 15	THE NUMERIC VALUE FOR RECEIPT/ COMPLIANCE, SPECIFIED AS RECURRENCE RATE NUMBER, DEFINES THE NUMBER N OF CONSECUTIVE TIME SLOTS FROM THE ORIGINAL TRANSMISSION TO THE DONATED TIME SLOT: N=3X2 TO THE (15-RRN) POWER.

5.2-583

MIL-STD-6016B

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

J12.2 MESSAGE SUMMARY

PURPOSE

The J12.2 Precision Aircraft Direction Message is used by controlling units for operations requiring precise control positioning of mission aircraft (for example, ground directed release of ordnance, automatic carrier landing operations, air cargo delivery, and Remotely Piloted Vehicle operations).

DATA ELEMENT SUMMARY

<u>J12.2I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
TRACK NUMBER, ADDRESSEE	15
VERTICAL CONTROL COMMAND	9
VERTICAL ERROR	6
LATERAL ERROR	7
LATERAL CONTROL COMMAND	9
PRECISION AIRCRAFT DIRECTION DISCRETE	4
TIME-TO-GO	5
AUTOPILOT CONTROL BIT	1
DROP DISCRETE	1

MIL-STD-6016B

J12.2 TRANSMIT/RECEIVE RULES

TITLE: Precision Aircraft Direction Message

TRANSMIT RULES

1. The J12.2 Precision Aircraft Direction message shall be transmitted by any C² JU responsible for precise control positioning of tactical mission aircraft.
2. Because the functions of aircraft control that will use this message will require a dedicated channel and network participation group, there is no need for a priority scheme for transmitting the Precision Aircraft Direction Discrete field values.
3. The unique characteristics of precision aircraft direction require continuous data updates up to a maximum rate of RRN = 13 (93.75 milliseconds). Because the Precision Aircraft Direction Discrete field value is included in all J12.2 messages, the discrete value last specified will be transmitted until replaced with a new discrete value.

RECEIVE RULES

There are no receive rules specified for this message.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: PRECISION AIRCRAFT DIRECTION INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00		
TRACK NUMBER, ADDRESSEE												:	MESSAGE		:	SUBLABEL,		:					:	WORD		:
												:	LENGTH		:	J-SERIES		:	LABEL, J-SERIES				:	FORMAT		:
												:	INDICATOR		:			:					:			:
15												:	3		:	3		:	5				:	2		:

:	49	48	47	46	45	44	43:	42	41	40	39	38	37:	36	35	34	33	32	31	30	29	28:	27	26	25	
:	LATERAL ERROR							:	VERTICAL ERROR							:	VERTICAL CONTROL COMMAND							:	---->	
:								:								:								:		
:	7							:	6							:	9							:		

:	69:	68:	67	66	65	64	63:	62	61	60	59:	58	57	56	55	54	53	52	51	50:		
:	DRP:AP	:						:	PAD DIS			:	LATERAL CONTROL COMMAND									:
:	DIS:CNT	:	TIME-T0-GO					:				:										:
:	:	:						:				:										:
:	1	:	1	:	5			:	4			:	9			:						:

WORD DESCRIPTION

WORD NUMBER: J12.2I

WORD TITLE: PRECISION AIRCRAFT DIRECTION INITIAL WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	00
270 004	LABEL, J-SERIES	2-	6 5	01100
271 005	SUBLABEL, J-SERIES	7-	9 3	010
800 001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
769 006	TRACK NUMBER, ADDRESSEE	13-	27 15	
707 001	VERTICAL CONTROL COMMAND	28-	36 9	
708 003	VERTICAL ERROR	37-	42 6	
708 004	LATERAL ERROR	43-	49 7	
707 002	LATERAL CONTROL COMMAND	50-	58 9	
1721 001	PRECISION AIRCRAFT DIRECTION DISCRETE (PAD DIS)	59-	62 4	
387 018	TIME-TO-GO	63-	67 5	
705 001	AUTOPILOT CONTROL BIT (AP CNT)	68	1	
704 004	DROP DISCRETE (DRP DIS)	69	1	

FIELD CODING FOR J12.2I

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	006	TRACK NUMBER, ADDRESSEE -----		THE TN OF A UNIT (I.E., JU OR PU) TO WHICH A MESSAGE IS ADDRESSED.
		NO STATEMENT NUMERIC	0 00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		ILLEGAL NUMERIC	00077 (OCTAL) 00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC	00177 (OCTAL)	COLLECTIVE ADDRESS.
		NUMERIC	00200 THROUGH 07776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL NUMERIC	07777 (OCTAL) 10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
707	001	VERTICAL CONTROL COMMAND -----		THE COMMAND USED FOR DIRECT AUTO- PILOT CONTROL OF THE PITCH ATTITU- TUDE OF THE CONTROLLED AIRCRAFT DURING AUTOMATIC LANDING CONTROL. POSITIVE VALUES ARE 'FLY-UP' COMMANDS AND NEGATIVE VALUES ARE 'FLY-DOWN' COMMANDS. THE REFEREN- CE PLANE IS THE PLANE DETERMINED BY THE LONGITUDINAL AND LATERAL AXES OF THE AIRCRAFT AT THE TIME OF INITIAL AUTOPILOT (COUPLER) ENGAGEMENT (INDICATED BY MESSAGE OR BY VOICE) IN THE AUTOMATIC MODE (MODE 1/1A).
		-13.5 THROUGH +13 229/512 DEGREES	0 THROUGH 511	IN 27/512 DEGREE INCREMENTS USING MODIFIED TWOS COMPLEMENT CODING.
708	003	VERTICAL ERROR -----		INDICATES THE AIRCRAFT VERTICAL DISPLACEMENT RELATIVE TO THE COMMANDED ALTITUDE. POSITIVE

5.2-590

MIL-STD-6016B

FIELD CODING FOR J12.2I

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
708	003	VERTICAL ERROR -----	(CONTINUED)	
		-640 THROUGH +620 FEET	0 THROUGH 63	VALUES INDICATE THAT THE AIRCRAFT IS BELOW THE COMMANDED ALTITUDE, AND NEGATIVE VALUES INDICATE THAT THE AIRCRAFT IS ABOVE THE COMMANDED ALTITUDE. IN 20 FEET INCREMENTS WITH MODIFIED TWOS COMPLEMENT CODING.
708	004	LATERAL ERROR -----		AIRCRAFT LATERAL DISPLACEMENT RELATIVE TO THE REQUIRED COURSE LINE. POSITIVE VALUES INDICATE THAT THE AIRCRAFT IS ON THE LEFT OF THE REQUIRED COURSE LINE AS VIEWED BY THE PILOT. NEGATIVE VALUES INDICATE THAT THE AIRCRAFT IS ON THE RIGHT OF THE REQUIRED COURSE LINE. IN 15.625 FEET INCREMENTS WITH MODIFIED TWOS COMPLEMENT CODING.
		-1000 THROUGH +984.375 FEET	0 THROUGH 127	
707	002	LATERAL CONTROL COMMAND -----		THE COMMAND USED FOR DIRECT AUTO-PILOT CONTROL OF THE BANK ATTITUDE OF THE CONTROLLED AIRCRAFT DURING AUTOMATIC LANDING CONTROL. POSITIVE VALUES ARE 'FLY-RIGHT' (RIGHT WING DOWN) AND NEGATIVE VALUES ARE 'FLY-LEFT' (LEFT WING DOWN), AS VIEWED BY THE PILOT. THE REFERENCE PLANE IS THE PLANE DETERMINED BY THE LONGITUDINAL AND LATERAL AXES OF THE AIRCRAFT AT THE TIME OF INITIAL AUTOPILOT (COUPLER) ENGAGEMENT (INDICATED BY MESSAGE OR BY VOICE) IN THE AUTOMATIC MODE (MODE 1/1A). IN 60/512 DEGREE INCREMENTS USING MODIFIED TWOS COMPLEMENT CODING.
		-30 THROUGH +29 452/512 DEGREES	0 THROUGH 511	
1721	001	PRECISION AIRCRAFT DIRECTION DISCRETE -----		PROVIDES DISCRETE INFORMATION FOR THE PRECISION AIRCRAFT DIRECTION MESSAGE.
		NO STATEMENT	0	
		PRECISION RADAR READY	1	THE PRECISION RADAR SYSTEM IS LOCKED ON AND TRACKING.

5.2-591

MIL-STD-6016B

FIELD CODING FOR J12.2I

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1721	001	PRECISION AIRCRAFT DIRECTION DISCRETE	(CONTINUED)	

		UNDER PRECISION CONTROL	2	VERTICAL AND LATERAL COMMAND DATA ARE VALID FOR USE BY AIRCRAFT AUTOPILOT.
		10 SECONDS TO GO	3	THE AIRCRAFT UNDER CONTROL IS 10 SECONDS FROM TOUCHDOWN/RELEASE.
		NOT UNDER COMMAND	4	VERTICAL AND LATERAL COMMAND DATA ARE NOT VALID FOR USE BY AIRCRAFT AUTOPILOT.
		REVERT TO VOICE	5	AIRCRAFT UNDER CONTROL SHOULD ESTABLISH VOICE COMMUNICATION WITH CONTROLLING UNIT.
		WAVE OFF	6	AIRCRAFT UNDER CONTROL SHOULD DISCONTINUE APPROACH.
		BEACON ON	7	AIRCRAFT IS COMMANDED TO TURN ON BEACON.
		LANDING CHECKLIST	8	AIRCRAFT UNDER CONTROL SHOULD PREPARE FOR LANDING.
		UNDEFINED	9 THROUGH 15	
387	018	TIME-TO-GO		TIME REMAINING UNTIL THE ACTION DESCRIBED IN THE MESSAGE OCCURS.

		0 THROUGH 31 SECONDS	0 THROUGH 31	IN ONE SECOND INCREMENTS.
705	001	AUTOPILOT CONTROL BIT		

		MANUAL	0	MESSAGES RECEIVED ARE FOR MANUAL CONTROL.
		AUTOPILOT	1	MESSAGES BEING RECEIVED ARE FOR CONTROL OF THE AIRCRAFT THROUGH THE AUTOPILOT COUPLER.
704	004	DROP DISCRETE		PROVIDES AN AUTOMATIC AIR-TO-GROUND WEAPON DROP COMMAND.

		NO ACTION REQUIRED	0	
		DROP WEAPON	1	

5.2-592

MIL-STD-6016B

MIL-STD-6016B

J12.3 MESSAGE SUMMARY

PURPOSE

The J12.3 Flight Path Message is used by controlling units to provide air units with multiple-leg flight path information.

DATA ELEMENT SUMMARY

<u>J12.3I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
TRACK NUMBER, ADDRESSEE	15
SEQUENCE NUMBER	4
MINUTE	6
HOURL	5
TIME FUNCTION	3
WAYPOINT ACTION/DESCRIPTOR	4
TOTAL POINTS IN SERIES	4
SPARE	16

<u>J12.3E0</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
SPARE	5
LATITUDE, 0.0013 MINUTE	23
LONGITUDE, 0.0013 MINUTE	24
ALTITUDE, 25 FT	13
ALTITUDE AMPLIFICATION	3

MIL-STD-6016B

J12.3 TRANSMIT/RECEIVE RULES

TITLE: Flight Path Message

TRANSMIT RULES

1. The J12.3 Flight Path message shall be transmitted by C² JUs to aircraft and/or missiles under their control to provide information on multiple flight paths. Aircraft shall reply using the J12.3 message with the Waypoint Action/Descriptor field set to the appropriate value.
2. C² JUs shall transmit the J12.3I/J12.3E0 word sequence with the Waypoint Action/Descriptor field set to the values 0-6 only.
3. Controlled aircraft shall transmit the J12.3I Flight Path initial word with the Waypoint Action/Descriptor field set to values 8-11 only.
4. A series of waypoints shall be transmitted sequentially in numerical order. The complete series shall be transmitted two times at an RRN = 3 (1.6 minutes, 1.2-2 minute interval) unless an aircraft responds with all points received. If an aircraft responds with one or more lost point messages, only the lost point segments will be retransmitted.
5. Controlled aircraft shall transmit the J12.3I word with the Waypoint Action/Descriptor field set to value 8 when all points have been received. When a controlled aircraft receives a J12.3I word containing the Waypoint Action/Descriptor field set to 3, Last Point in Series, and there are missing sequence numbers in the series received, the controlled aircraft shall transmit a J12.3I word with the Waypoint Action/Descriptor field set to 9, Lost Point, and the sequence number for each missing point. The controlling unit shall retransmit the missing points in a new series of J12.3I/J12.3E0 word sequences. This procedure shall be fully automatic and require no operator action.
6. J12.3 messages for all of the Waypoint Action/Descriptor field values other than 0 shall be transmitted two times at an RRN = 6 (12 seconds, 8-20 second interval).

J12.3 TRANSMIT/RECEIVE RULES (Continued)

RECEIVE RULES

There are no receive rules specified for this message.

.....

WORD TITLE: FLIGHT PATH INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00		
TRACK NUMBER, ADDRESSEE												:	MESSAGE		:	SUBLABEL,		:					:	WORD		:
												:	LENGTH		:	J-SERIES		:	LABEL, J-SERIES				:	FORMAT		:
												:	INDICATOR		:			:					:			:
15												:	3		:	3		:	5				:	2		:

:	49	48	47	46:	45	44	43:	42	41	40	39	38:	37	36	35	34	33	32:	31	30	29	28:	27	26	25				
:	WAYPOINT				:	TIME				:					:					:					:				
:	ACTION/ DESCRIPTOR				:	FUNCTION				:	HOUR				:	MINUTE				:	SEQUENCE NUMBER				:	---->			
:	4				:	3				:	5				:	6				:	4				:				

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	:	53	52	51	50	:
:																	:	TOTAL POINTS IN		:		
:	SPARE																:	SERIES		:		
:																	:			:		
:	16																:	4		:		

WORD DESCRIPTION

WORD NUMBER: J12.3I

WORD TITLE: FLIGHT PATH INITIAL WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	00
270 004	LABEL, J-SERIES	2-	6 5	01100
271 005	SUBLABEL, J-SERIES	7-	9 3	011
800 001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
769 006	TRACK NUMBER, ADDRESSEE	13-	27 15	
1683 001	SEQUENCE NUMBER	28-	31 4	
797 004	MINUTE	32-	37 6	
792 001	HOUR	38-	42 5	
1681 001	TIME FUNCTION	43-	45 3	
1705 001	WAYPOINT ACTION/DESCRIPTOR	46-	49 4	
891 001	TOTAL POINTS IN SERIES (TOT PTS)	50-	53 4	
756 016	SPARE	54-	69 16	

FIELD CODING FOR J12.3I

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	006	TRACK NUMBER, ADDRESSEE -----		THE TN OF A UNIT (I.E., JU OR PU) TO WHICH A MESSAGE IS ADDRESSED.
		NO STATEMENT NUMERIC	0 00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		ILLEGAL NUMERIC	00077 (OCTAL) 00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC NUMERIC	00177 (OCTAL) 00200 THROUGH 07776 (OCTAL)	COLLECTIVE ADDRESS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL NUMERIC	07777 (OCTAL) 10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
1683	001	SEQUENCE NUMBER -----		THE SEQUENCE NUMBER OF THE POINT BEING TRANSMITTED IN THIS MESSAGE.
		NO STATEMENT WAYPOINTS 1 THROUGH 15	0 1 THROUGH 15	
797	004	MINUTE -----		THE MINUTE OF THE HOUR.
		0 THROUGH 59 ILLEGAL NO STATEMENT	0 THROUGH 59 60 THROUGH 62 63	IN ONE MINUTE INCREMENTS.
792	001	HOUR ----		EXPRESSES TIME OF DAY OR A PERIOD OF TIME IN HOURS.
		0 HOUR 1 THROUGH 23 HOURS ILLEGAL NO STATEMENT	0 1 THROUGH 23 24 THROUGH 30 31	IN ONE HOUR INCREMENTS.
1681	001	TIME FUNCTION -----		USED IN CONJUNCTION WITH THE MINUTE AND HOUR FIELDS TO DESCRIBE THE

5.2-598

MIL-STD-6016B

FIELD CODING FOR J12.3I

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1681	001	TIME FUNCTION -----	(CONTINUED)	
				TIME FUNCTION ASSOCIATED WITH THE REPORTED TIME.
		NO STATEMENT	0	
		ACTIVATION TIME	1	
		DEACTIVATION TIME	2	
		ARRIVAL TIME	3	
		DEPARTURE TIME	4	
		TIME POINT ESTABLISHED	5	THE TIME THE REPORTED POSITION FOR THE POINT WAS ESTABLISHED. THIS MAY BE A TIME PRIOR TO DATA ENTRY.
		NON-OP TIME	6	THE TIME THE SITE IS EXPECTED TO BECOME LESS THAN FULLY OPERATIONAL.
		OP TIME	7	THE TIME THE SITE IS EXPECTED TO RETURN FULLY OPERATIONAL.
1705	001	WAYPOINT ACTION/DESCRIPTOR -----		DESCRIBES ACTION TO BE TAKEN AND THE RESPONSE TO AN ACTION REQUESTED.
		----- C2 UNIT TO AIRCRAFT OR MISSILE -----		
		ORIGINAL POINT	0	ORIGINAL POINT USED FOR THE INITIAL TRANSMISSION OF A SET OF POINTS TO AN ADDRESSED AIRCRAFT OR MISSILE. (EXCEPT THE FINAL POINT IN THE SERIES, WHICH IS SET TO 3 FOR AIRCRAFT OR 6 FOR MISSILE.)
		----- C2 UNIT TO AIRCRAFT -----		
		REPLACEMENT POINT	1	USED ONLY WHEN A PREVIOUSLY TRANSMITTED POINT IS TO BE UPDATED. THE SEQUENCE NUMBER IS USED TO DESIGNATE WHICH POINT POSITION IS TO BE UPDATED.
		CANCEL POINT	2	USED BY C2 UNITS TO CANCEL A PREVIOUSLY TRANSMITTED POINT DESIGNATED BY THE VALUE IN THE

5.2-599

MIL-STD-6016B

FIELD CODING FOR J12.3I

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1705	001	WAYPOINT ACTION/DESCRIPTOR -----	(CONTINUED)	
		LAST POINT IN SERIES	3	SEQUENCE NUMBER FIELD. DESIGNATES TO THE AIRCRAFT THAT THIS IS THE LAST POINT IN THE SERIES. THE AIRCRAFT WILL THEN RESPOND WITH A VALUE 8 OR 9.
		ORBIT THIS POINT	4	THE AIRCRAFT IS DIRECTED TO ORBIT THIS POINT UNTIL FURTHER DIRECTED OR UNTIL THE TIME SPECIFIED.
		RESTRICTED AREA BOUNDARY	5	USED TO DEFINE RESTRICTED OR HOT AREAS. IF THE AREAS ARE TO BE AVOIDED FOR SPECIFIC TIMES ONLY, A TIME AND TIME FUNCTION SHALL BE TRANSMITTED.
		----- C2 UNIT TO MISSILE -----		
		TARGET	6	NOTIFIES THE MISSILE (I.E., CRUISE MISSILE) OF THE TARGET POSITION OR TERMINAL ACTION OF THE MISSILE, DEPENDING ON THE MISSILE DESIGN.
		UNDEFINED	7	
		----- AIRCRAFT TO C2 UNIT -----		
		ALL POINTS RECEIVED	8	AN AUTOMATIC RESPONSE BY THE AIRCRAFT IF ALL THE DATA HAS BEEN RECEIVED.
		LOST POINT	9	USED TO SPECIFY WHICH POINTS HAVE BEEN MISSED, OR WHICH HAVE ILLOGICAL DATA. THE C2 UNIT WILL RETRANSMIT THE SPECIFIED POINT.
		PILOT CANNOT COMPLY	10	USED BY THE AIRCRAFT'S PILOT TO INDICATE THAT HE CANNOT PERFORM THE TRANSMITTED FLIGHT PATH.
		PILOT WILL COMPLY	11	USED BY THE AIRCRAFT PILOT TO INDICATE HE WILL PERFORM THE TRANSMITTED FLIGHT PATH.
		UNDEFINED	12 THROUGH 15	

5.2-600

MIL-STD-6016B

FIELD CODING FOR J12.3I (SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
891	001	TOTAL POINTS IN SERIES -----		THE TOTAL NUMBER OF INDIVIDUAL POINTS THAT ARE BEING TRANSMITTED IN THIS SERIES OF POINTS.
		NO STATEMENT	0	
		1 THROUGH 15 POINTS	1 THROUGH 15	

WORD MAP

WORD NUMBER: J12.3E0

WORD TITLE: FLIGHT PATH EXTENSION WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00	:
LATITUDE, 0.0013 MINUTE																		:	SPARE			:	WORD	:	
																		:				:	FORMAT	:	
23																		:	5			:	2	:	
49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25	:
LONGITUDE, 0.0013 MINUTE																			:						---
																			:						
24																			:						

WORD DESCRIPTION

WORD NUMBER: J12.3E0

WORD TITLE: FLIGHT PATH EXTENSION WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	10
756 005	SPARE	2-	6 5	
281 015	LATITUDE, 0.0013 MINUTE	7-	29 23	
282 015	LONGITUDE, 0.0013 MINUTE	30-	53 24	
365 033	ALTITUDE, 25 FT	54-	66 13	
1682 001	ALTITUDE AMPLIFICATION (ALT AMP)	67-	69 3	

FIELD CODING FOR J12.3E0

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
281	015	LATITUDE, 0.0013 MINUTE -----		THE PRECISION IS APPROXIMATELY 8 FEET. IN 90/4,194,303 DEGREE INCREMENTS.
		0 DEGREES	0	
		+90/4,194,303 THROUGH +90 DEGREES NORTH	1 THROUGH 4194303	
		NO STATEMENT	4194304	
		-90 THROUGH -90/4,194,303 DEGREES SOUTH	4194305 THROUGH 8388607	
282	015	LONGITUDE, 0.0013 MINUTE -----		THE PRECISION IS APPROXIMATELY 8 FEET. IN 180/8,388,607 DEGREE INCREMENTS.
		0 DEGREES	0	
		+180/8,388,607 THROUGH +180 DEGREES EAST	1 THROUGH 8388607	
		NO STATEMENT	8388608	
		-180 THROUGH -180/8,388,607 DEGREES WEST	8388609 THROUGH 16777215	
365	033	ALTITUDE, 25 FT -----		EXPRESSES ALTITUDE AS MEASURED OUT- WARD FROM THE EARTH AS A POSITIVE QUANTITY ABOVE MEAN SEA LEVEL (MSL) IN FEET. IN 25 FEET INCREMENTS.
		0 THROUGH 204,750 FEET ALTITUDE UNKNOWN	0 THROUGH 8190 8191	
1682	001	ALTITUDE AMPLIFICATION -----		SPECIFIES THE FUNCTION OF AN ALTITUDE.
		NO STATEMENT	0	
		ARRIVE AT SPECIFIED ALTITUDE	1	
		DEPART AT SPECIFIED ALTITUDE	2	
		UNDEFINED	3 THROUGH 5	
		HOT BELOW THIS ALTITUDE	6	
		HOT ABOVE THIS ALTITUDE	7	

MIL-STD-6016B

J12.4 MESSAGE SUMMARY

PURPOSE

The J12.4 Controlling Unit Change Message is used to provide new control agency information to an aircraft prior to handoff to the new control agency. It is also used by a tactical aircraft to initiate control procedures with a new controlling unit or to effect a change of controlling unit in response to a controlling unit change order or by a C² JU to initiate control by own unit.

DATA ELEMENT SUMMARY

<u>J12.4I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
TRACK NUMBER, ADDRESSEE	15
TRACK NUMBER, NEW CONTROL AGENCY	19
CONTROL CHANGE INDICATOR	2
CONTROL CHANNEL	7
RADIO TYPE	3
SECURE RADIO INDICATOR	1
SPARE	1
RECEIPT/COMPLIANCE	5
RECURRENCE RATE, RECEIPT/COMPLIANCE	4

<u>J12.4E0</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
SPARE	4
VOICE FREQUENCY/CHANNEL INDICATOR	1
VOICE CALL SIGN, NEW CONTROL AGENCY	24
LINK 4A FREQUENCY	13
MODE III CODE, 1	12
SQUAWK FLASH INDICATOR	1
VOICE FREQUENCY/CHANNEL	13

MIL-STD-6016B

J12.4 TRANSMIT/RECEIVE RULES

TITLE: Controlling Unit Change Message

TRANSMIT RULES

1. The J12.4 Controlling Unit Change message shall be transmitted by C² JUs responsible for controlling tactical aircraft and by those tactical aircraft under their control.
2. To initiate or effect a change of controlling unit, a C² JU shall transmit the J12.4I/J12.4E0 word sequence. The Control Change Indicator field in the initial word shall be set to value 0. The R/C field in the J12.4I Controlling Unit Change initial word shall be set to value 0.
3. A tactical aircraft shall transmit a J12.4I message three times at an RRN of 6 (12 seconds, 8-20 second interval) to a new controlling unit either to initiate control procedures with that unit or to effect a change of controlling unit in response to a controlling unit change order. Receipt of a response message shall cause the periodic transmission to cease. The Control Change Indicator field in the initial word shall be set to value 1. The R/C field in the J12.4I word shall be set to value 0.
4. A tactical aircraft that does not know the address of the assigned controlling unit shall transmit a J12.4I message to the Collective Address, 00177, to initiate control procedures. The Control Change Indicator field shall be set to value 1. The R/C field shall be set to value 1. The J12.4I word shall be transmitted periodically at an RRN of 6 (12 seconds, 8-20 second interval) until transmission is terminated by operator action or a J12.4I message with the Control Change Indicator field set to value 0 is received.
5. The C² JU that terminates control shall transmit a J12.4I word with the Control Change Indicator field set to value 2 and the R/C field set to value 0.
6. Transmission of the J12.4 message with the various R/C values set shall be in accordance with procedures specified in paragraph 4.1.7.

J12.4 TRANSMIT/RECEIVE RULES (Continued)

RECEIVE RULES

There are no receive rules specified for this message.

WORD MAP

WORD NUMBER: J12.4I

WORD TITLE: CONTROLLING UNIT CHANGE INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00	:			
TRACK NUMBER, ADDRESSEE												:	MESSAGE	:	SUBLABEL,	:							:	WORD	:			
												:	LENGTH	:	J-SERIES	:	LABEL, J-SERIES						:	FORMAT	:			
												:	INDICATOR	:							:							:
15												:	3	:	3	:	5						:	2	:			
49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25	:			
<---		CNT CHG:		TRACK NUMBER, NEW CONTROL AGENCY																		:		---		:		
																										:		
																										:		
		2		19																						:		

WORD DESCRIPTION

WORD NUMBER: J12.4I

WORD TITLE: CONTROLLING UNIT CHANGE INITIAL WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	00
270 004	LABEL, J-SERIES	2-	6 5	01100
271 005	SUBLABEL, J-SERIES	7-	9 3	100
800 001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
769 006	TRACK NUMBER, ADDRESSEE	13-	27 15	
769 024	TRACK NUMBER, NEW CONTROL AGENCY	28-	46 19	
1647 001	CONTROL CHANGE INDICATOR (CNT CHG)	47-	48 2	
348 006	CONTROL CHANNEL	49-	55 7	
1648 001	RADIO TYPE	56-	58 3	
1649 001	SECURE RADIO INDICATOR (SEC IND)	59	1	
756 001	SPARE (SP)	60	1	
392 008	RECEIPT/COMPLIANCE	61-	65 5	
444 025	RECURRENCE RATE, RECEIPT/ COMPLIANCE (RRN R/C)	66-	69 4	

FIELD CODING FOR J12.4I

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	006	TRACK NUMBER, ADDRESSEE -----		THE TN OF A UNIT (I.E., JU OR PU) TO WHICH A MESSAGE IS ADDRESSED.
		NO STATEMENT NUMERIC	0 00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		ILLEGAL NUMERIC	00077 (OCTAL) 00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC	00177 (OCTAL)	COLLECTIVE ADDRESS.
		NUMERIC	00200 THROUGH 07776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL NUMERIC	07777 (OCTAL) 10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
769	024	TRACK NUMBER, NEW CONTROL AGENCY -----		THE TN OF THE CONTROLLING UNIT THAT WILL ASSUME CONTROL OF AN AIRCRAFT WHEN THE ACTION TO CHANGE CONTROLLING AGENCIES IS UNDER- TAKEN. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE- BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	024	TRACK NUMBER, NEW CONTROL AGENCY -----	(CONTINUED)	

FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6
00111	7
01000	A
01001	B
01010	C
01011	D
01100	E
01101	F
01110	G
01111	H
10000	J
10001	K
10010	L
10011	M
10100	N
10101	P
10110	Q
10111	R
11000	S
11001	T
11010	U
11011	V
11100	W
11101	X
11110	Y

FIELD CODING FOR J12.4I

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	024	TRACK NUMBER, NEW CONTROL AGENCY -----	(CONTINUED)	
		00000	0	11111 Z NO STATEMENT.
		00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		00077	63	ILLEGAL.
		00100-00175	64 THROUGH 125	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		00176	126	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		00177	127	COLLECTIVE ADDRESS.
		00200-07776	128 THROUGH 4094	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		07777	4095	ILLEGAL.
		0A000-0Z777	4096 THROUGH 16383	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		10000-17777	16384 THROUGH 20479	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		20000-27777	32768 THROUGH 36863	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G.,

5.2-612

MIL-STD-6016B

FIELD CODING FOR J12.4I

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	024	TRACK NUMBER, NEW CONTROL AGENCY -----	(CONTINUED)	
		3A000-3Z777	53248 THROUGH 65535	TRACKS AND REFERENCE POINTS. ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		70000-77776	114688 THROUGH 118782	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND

5.2-613

MIL-STD-6016B

FIELD CODING FOR J12.4I

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	024	TRACK NUMBER, NEW CONTROL AGENCY -----	(CONTINUED)	
1647	001	CONTROL CHANGE INDICATOR -----		REFERENCE POINTS. PROVIDES THE MEANS TO CHANGE THE CONTROLLING AGENCY OF A CONTROLLED JU. CONTROLLING AGENCY ORDERS ADDRESSEE TN TO CHANGE TO NEW CONTROLLING AGENCY. SOURCE TN REQUEST ADDRESSEE TN TO ASSUME CONTROL OF SOURCE TN. CONTROLLING AGENCY TERMINATES CONTROL OF ADDRESSEE TN.
		CONTROL CHANGE ORDER	0	
		CONTROL REQUEST	1	
		TERMINATE CONTROL	2	
		UNDEFINED	3	
348	006	CONTROL CHANNEL -----		
		CONTROL CHANNEL NUMBER	0 THROUGH 126	
		NO STATEMENT	127	
1648	001	RADIO TYPE -----		SPECIFIES THE TYPE OF RADIO.
		NO STATEMENT	0	
		UHF-AM	1	
		VHF-AM	2	
		VHF-FM	3	
		HF-SSB UPPER	4	
		HF	5	
		UHF-FM	6	
		HF-SSB LOWER	7	
1649	001	SECURE RADIO INDICATOR -----		SPECIFIES WHETHER OR NOT A RADIO IS OPERATING IN THE SECURE MODE.
		NO STATEMENT	0	
		RADIO IN SECURE MODE	1	
392	008	RECEIPT/COMPLIANCE -----		
		ORIGINAL ORDER	0	RECEIPT/COMPLIANCE RESPONSE REQUIRED.
		ORIGINAL ORDER	1	RECEIPT/COMPLIANCE RESPONSE NOT REQUIRED. MUST BE USED IN CONJUNCTION WITH ORIGINAL ORDER

5.2-614

MIL-STD-6016B

FIELD CODING FOR J12.4I

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

392	008	RECEIPT/COMPLIANCE	(CONTINUED)	
-----	-----	--------------------	-------------	--

MACHINE RECEIPT	2
WILCO (WILL COMPLY)	3

HAVCO (HAVE COMPLIED)	4
-----------------------	---

ORIGINAL ORDER	5
----------------	---

CANTCO (CANNOT COMPLY)	6
------------------------	---

CANTPRO (CANNOT PROCESS)	7
--------------------------	---

CANTPRO (CANNOT PROCESS)	8
--------------------------	---

CANTPRO (CANNOT PROCESS)	9
--------------------------	---

CANTPRO (CANNOT PROCESS)	10
--------------------------	----

MESSAGES ADDRESSED TO COLLECTIVE ADDRESSES. THE ORIGINAL ORDER SHALL BE TRANSMITTED 3 TIMES. MESSAGE RECEIVED ERROR FREE. THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER WILL COMPLY. IN THIS USAGE, THE SYSTEM COMPONENT IS A HUMAN OPERATOR OR (UNMANNED VEHICLE ONLY) A MACHINE. THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER HAS COMPLIED. IN THIS USAGE, THE SYSTEM COMPONENT MAY BE A HUMAN OPERATOR OR A MACHINE. RECEIPT/COMPLIANCE RESPONSE (MR AND/OR CANTPRO ONLY) REQUIRED. THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER CANNOT COMPLY. IN THIS USAGE, THE SYSTEM COMPONENT IS A HUMAN OPERATOR OR (UNMANNED VEHICLE ONLY) A MACHINE. NON-SPECIFIC SYSTEM LIMITATION OR CONFLICT. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED. TIME SLOT ASSIGNMENT CONFLICT DETECTED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED. CRYPTOVARIABLE NOT HELD. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED. PARTICIPATION GROUP NOT DEFINED.

5.2-615

MIL-STD-6016B

FIELD CODING FOR J12.4I

(SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

392	008	RECEIPT/COMPLIANCE	(CONTINUED)	
-----	-----	--------------------	-------------	--

CANTPRO (CANNOT PROCESS) 11

CANTPRO (CANNOT PROCESS) 12

CANTPRO (CANNOT PROCESS) 13

CANTPRO (CANNOT PROCESS) 14

CANTPRO (CANNOT PROCESS) 15

THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.

APPLICABLE ASSIGNMENT TABLE FULL.

THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.

RELAY FUNCTION SPECIFIED ALREADY HAS ASSIGNED TIME SLOT BLOCKS FOR WHICH A DIFFERENT RELAY MODE/NET NUMBER HAS BEEN SPECIFIED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.

INTERFERENCE PROTECTION FEATURES WOULD BE VIOLATED BY ACCEPTANCE OF ASSIGNMENT. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.

HOST SUBSCRIBER INTERFACE IS INACTIVE AND MESSAGE IS NOT PROCESSED BY THE TERMINAL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.

TN, ADDRESSEE DOES NOT IMPLEMENT THE ACTION REQUESTED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN

5.2-616

MIL-STD-6016B

FIELD CODING FOR J12.4I

(SHEET 8)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
		CANTPRO (CANNOT PROCESS)	16	RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED. ONE OR MORE TNS IN THE OM NOT HELD. THIS IS AN AUTOMATIC COMPUTER- GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	17	TN, REFERENCE OR TN, FRIENDLY WEAPON IS UNDER OWN UNIT CONTROL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	18	UNIT NOT EXERCISING AIR CONTROL CAPABILITY. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	19	UNACCEPTABLE IDENTITY. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	20	ADDRESSEE TN IS INACTIVE. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	21	THE FORWARDING UNIT DID NOT RECEIVE A MACHINE RECEIPT FROM THE ADDRESSEE TN. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.

5.2-617

MIL-STD-6016B

FIELD CODING FOR J12.4I

(SHEET 9)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
		CANTPRO (CANNOT PROCESS)	22	TN, REFERENCE OR TN, FRIENDLY WEAPON IS NOT UNDER THIS UNIT'S CONTROL. THIS IS AN AUTOMATIC COMPUTER- GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		UNDEFINED NO STATEMENT	23 THROUGH 30 31	
444	025	RECURRENCE RATE, RECEIPT/ COMPLIANCE -----		IDENTIFIES THE TIME SLOT IN WHICH THE RECEIPT/COMPLIANCE FOR THE MESSAGE IS TO BE TRANSMITTED.
		NO STATEMENT	0	
		NUMERIC	1 THROUGH 15	THE NUMERIC VALUE FOR RECEIPT/ COMPLIANCE, SPECIFIED AS RECURRENCE RATE NUMBER, DEFINES THE NUMBER N OF CONSECUTIVE TIME SLOTS FROM THE ORIGINAL TRANSMISSION TO THE DONATED TIME SLOT: N=3X2 TO THE (15-RRN) POWER.

5.2-618

MIL-STD-6016B

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J12.4E0
WORD TITLE: CONTROLLING UNIT CHANGE EXTENSION WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00	:	
VOICE CALL SIGN, NEW CONTROL AGENCY																	:VFC:		SPARE			: WORD		:		
																	:IND:					:FORMAT		:		
																	:					:		:		
24																	: 1 :		4			: 2		:		
49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25	:	
<---					:	LINK 4A FREQUENCY															:	---				
					:																:					
					:	13															:					
					:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50	:
					:	VOICE FREQUENCY/CHANNEL															:SQK:		MODE III CODE, 1			:
					:																:FLS:					:
					:																:					:
					:	13															: 1 :		12			:

WORD DESCRIPTION

WORD NUMBER: J12.4E0
WORD TITLE: CONTROLLING UNIT CHANGE EXTENSION WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	10
756 004	SPARE	2-	5 4	
898 001	VOICE FREQUENCY/CHANNEL	6	1	
	INDICATOR (VFC IND)			
264 003	VOICE CALL SIGN, NEW CONTROL	7-	30 24	
	AGENCY			
417 017	LINK 4A FREQUENCY	31-	43 13	
295 003	MODE III CODE, 1	44-	55 12	
1650 001	SQUAWK FLASH INDICATOR	56	1	
	(SQK FLS)			
417 016	VOICE FREQUENCY/CHANNEL	57-	69 13	

FIELD CODING FOR J12.4E0

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
898	001	VOICE FREQUENCY/CHANNEL INDICATOR ----- PRIMARY VOICE FREQUENCY/ CHANNEL ALTERNATE VOICE FREQUENCY/CHANNEL	0 1	INDICATES WHETHER THE VOICE FREQUENCY/CHANNEL IN THE MESSAGE IS THE PRIMARY OR THE ALTERNATE VOICE FREQUENCY/CHANNEL. THE VOICE FREQUENCY/CHANNEL IS THE PRIMARY VOICE FREQUENCY/CHANNEL. THE VOICE FREQUENCY/CHANNEL IS THE ALTERNATE VOICE FREQUENCY/CHANNEL.
264	003	VOICE CALL SIGN, NEW CONTROL AGENCY -----		AN ALPHANUMERICALLY-CODED CALL SIGN USED IN VOICE COMMUNICATIONS TO IDENTIFY THE NEW CONTROL AGENCY. THE 24 BITS ARE DIVIDED INTO FOUR GROUPS OF 6 BITS. EACH GROUP IS INTERPRETED INDEPENDENTLY IN ACCORDANCE WITH THE FOLLOWING CODE:
		BLANK	0	
		1	1	
		2	2	
		3	3	
		4	4	
		5	5	
		6	6	
		7	7	
		8	8	
		9	9	
		A	10	
		B	11	
		C	12	
		D	13	
		E	14	
		F	15	
		G	16	
		H	17	
		I	18	
		J	19	
		K	20	
		L	21	
		M	22	
		N	23	
		O	24	
		P	25	
		Q	26	
		R	27	

FIELD CODING FOR J12.4E0

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
264	003	VOICE CALL SIGN, NEW CONTROL AGENCY ----- S T U V W X Y Z UNDEFINED 0 (ZERO)	(CONTINUED) 28 29 30 31 32 33 34 35 36 THROUGH 62 63	
417	017	LINK 4A FREQUENCY ----- NO STATEMENT UHF FREQUENCY ILLEGAL	 0 1 THROUGH 7000 7001 THROUGH 8191	IDENTIFIES A UHF VOICE RADIO CHANNEL NUMBER TO ACCOUNT FOR 7000 POSSIBLE RADIO FREQUENCIES IN THE 225 TO 400 MHZ BAND. THE BIT CODE IS RELATED TO THE UHF FREQUENCY BY USING THE FOLLOWING FORMULA: $\text{FREQ(MHZ)} = 225 + .025(N-1)$ WHERE N = BIT CODE NUMBER.
295	003	MODE III CODE, 1 ----- NO STATEMENT 1 THROUGH 7777 (OCTAL)	 0 0001 THROUGH 7777 (OCTAL)	PROVIDES MODE III BEACON CODE WHICH IS ASSIGNED BY THE NEW CONTROLLING UNIT TO THE CONTROLLED AIRCRAFT. THIS CODE CANNOT BE ASSIGNED AS AN OPERATIONAL CODE. INDICATES THERE ARE NO DATA FOR TRANSMISSION. WITHIN THE FIELD, SIF CODES ARE IN THE ORDER A, B, C, D WITH EACH TRIAD IN THE ORDER 4, 2, 1.
1650	001	SQUAWK FLASH INDICATOR ----- NO STATEMENT SQUAWK FLASH	 0 1	DIRECTS THE PILOT TO SQUAWK FLASH.
417	016	VOICE FREQUENCY/CHANNEL -----		IDENTIFIES A UHF VOICE RADIO CHANNEL NUMBER TO ACCOUNT FOR 7000 POSSIBLE RADIO FREQUENCIES IN THE 225 TO 400 MHZ BAND OR THE OPTION

5.2-623

MIL-STD-6016B

FIELD CODING FOR J12.4E0 (SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
417	016	VOICE FREQUENCY/CHANNEL -----	(CONTINUED)	
		NO STATEMENT UHF FREQUENCY	0 1 THROUGH 7000	OF SELECTING CHANNEL GROUP A OR CHANNEL GROUP B. THE BIT CODE IS RELATED TO THE UHF FREQUENCY BY USING THE FOLLOWING FORMULA: FREQ(MHZ) = 225 + .025(N-1) WHERE N = BIT CODE NUMBER.
		ILLEGAL CHANNEL GROUP A CHANNEL GROUP B ILLEGAL	7001 THROUGH 7039 7040 THROUGH 7167 7168 THROUGH 7295 7296 THROUGH 8191	128 CHANNELS FROM 0-127. 128 CHANNELS FROM 0-127.

MIL-STD-6016B

J12.5 MESSAGE SUMMARY

PURPOSE

The J12.5 Target/Track Correlation Message is used by controlling C² JUs to (a) correlate a target and a track, (b) decorrelate a target and a track, and (c) correlate multiple targets with a track.

DATA ELEMENT SUMMARY

<u>J12.5I</u>		<u>J12.5E1 (Continued)</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	TRACK NUMBER, INDEX ORIGINATOR	15
LABEL, J-SERIES	5	G	
SUBLABEL, J-SERIES	3	INDEX NUMBER, G	6
MESSAGE LENGTH INDICATOR	3	CORRELATION INDICATOR, G	1
TRACK NUMBER, OBJECTIVE	19	SPARE	2
TRACK NUMBER, INDEX ORIGINATOR	15		
A			
INDEX NUMBER, A	6		
CORRELATION INDICATOR, A	1		
IDENTITY, EVALUATED	3		
STRENGTH, EVALUATED	4		
ID/STRENGTH INDICATOR	2		
SPARE	7		
<u>J12.5E0</u>			
DATA ELEMENT	# BITS		
WORD FORMAT	2		
TRACK NUMBER, INDEX ORIGINATOR	15		
B			
INDEX NUMBER, B	6		
CORRELATION INDICATOR, B	1		
TRACK NUMBER, INDEX ORIGINATOR	15		
C			
INDEX NUMBER, C	6		
CORRELATION INDICATOR, C	1		
TRACK NUMBER, INDEX ORIGINATOR	15		
D			
INDEX NUMBER, D	6		
CORRELATION INDICATOR, D	1		
SPARE	2		
<u>J12.5E1</u>			
DATA ELEMENT	# BITS		
WORD FORMAT	2		
TRACK NUMBER, INDEX ORIGINATOR	15		
E			
INDEX NUMBER, E	6		
CORRELATION INDICATOR, E	1		
TRACK NUMBER, INDEX ORIGINATOR	15		
F			
INDEX NUMBER, F	6		
CORRELATION INDICATOR, F	1		

MIL-STD-6016B

J12.5 TRANSMIT/RECEIVE RULES

TITLE: Target/Track Correlation Message

TRANSMIT RULES

1. The J12.5 Target/Track Correlation message shall be transmitted periodically at an RRN = 3 (1.6 minutes, 1.2-2 minute interval) by C² JUs controlling aircraft on tactical control nets.
2. The J12.5E0 Target/Track Correlation extension word shall be transmitted with the J12.5I Target/Track Correlation initial word when more than one correlation exists with a given TN.
3. When any correlation data associated with the Objective TN changes, the complete J12.5 message shall be sent, and the periodic rate update specified in transmit rule 1 shall be reinitiated.
4. If the Objective TN is changed by a dual designation resolution, all correlations will be decorrelated and recorrelated to the new TN. This will require two messages, with the decorrelation message preceding the new correlation message.
5. When the Objective TN is dropped all correlations shall be cancelled with a decorrelation message.
6. When a target with a correlated index number is dropped there is no requirement to transmit this message. If the dropped index number is part of a multiple correlation then the dropped data will be deleted from the next periodic transmission.
7. When the ID/Strength Indicator changes, the J12.5I word shall be transmitted once, and the periodic rate update specified in rule 1 shall be reinitiated.

J12.5 TRANSMIT/RECEIVE RULES (Continued)

RECEIVE RULES

There are no receive rules specified for this message.

WORD MAP

WORD NUMBER: J12.5I

WORD TITLE: TARGET/TRACK CORRELATION INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13:	12	11	10:	09	08	07:	06	05	04	03	02:	01	00:			
TRACK NUMBER, OBJECTIVE												:	MESSAGE	:	SUBLABEL,	:							:	WORD	:		
												:	LENGTH	:	J-SERIES	:	LABEL, J-SERIES						:	FORMAT	:		
												:	INDICATOR	:							:						
19												:	3	:	3	:	5						:	2	:		
49	48	47:	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32:	31	30	29	28	27	26	25			
		:	TRACK NUMBER, INDEX ORIGINATOR A														:										
<---		:															:	---									
		:															:										
		:	15														:										
					:	69	68	67	66	65	64	63:	62	61:	60	59	58	57:	56	55	54:	53:	52	51	50		
					:	SPARE							:	I/S	:	IND:	STRENGTH,	:	IDENTITY,	:	COR:	:	INDEX				
					:								:		:		EVALUATED	:	EVALUATED	:	INA:	:	NUMBER,	A			
					:								:		:			:		:		:					
					:	7							:	2	:	4	:	3	:	1	:	6					

WORD DESCRIPTION

WORD NUMBER: J12.5I

WORD TITLE: TARGET/TRACK CORRELATION INITIAL WORD

REFERENCE			BIT	#	
DFI/DUI	DATA FIELD	DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD	FORMAT	0-	1 2	01
270 004	LABEL,	J-SERIES	2-	6 5	01100
271 005	SUBLABEL,	J-SERIES	7-	9 3	101
800 001	MESSAGE	LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
769 010	TRACK	NUMBER, OBJECTIVE	13-	31 19	
769 048	TRACK	NUMBER, INDEX ORIGINATOR	32-	46 15	
	A				
768 003	INDEX	NUMBER, A	47-	52 6	
1862 002	CORRELATION	INDICATOR, A	53	1	
	(COR	INA)			
376 002	IDENTITY,	EVALUATED	54-	56 3	
386 003	STRENGTH,	EVALUATED	57-	60 4	
1926 001	ID/STRENGTH	INDICATOR (I/S IND)	61-	62 2	
756 007	SPARE		63-	69 7	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	010	TRACK NUMBER, OBJECTIVE -----		THE TN OF THE OBJECT OF THE ACTION DESCRIBED IN THE MESSAGE. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE-BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANNN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6
00111	7
01000	A
01001	B
01010	C
01011	D
01100	E
01101	F
01110	G
01111	H
10000	J

FIELD CODING FOR J12.5I

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	010	TRACK NUMBER, OBJECTIVE -----	(CONTINUED)	
				10001 K
				10010 L
				10011 M
				10100 N
				10101 P
				10110 Q
				10111 R
				11000 S
				11001 T
				11010 U
				11011 V
				11100 W
				11101 X
				11110 Y
				11111 Z
		00000	0	NO STATEMENT.
		00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		00077	63	ILLEGAL.
		00100-00175	64 THROUGH 125	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		00176	126	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		00177	127	COLLECTIVE ADDRESS.
		00200-07776	128 THROUGH 4094	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		07777	4095	ILLEGAL.
		0A000-0Z777	4096 THROUGH 16383	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		10000-17777	16384 THROUGH 20479	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.

5.2-631

MIL-STD-6016B

FIELD CODING FOR J12.5I

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	010	TRACK NUMBER, OBJECTIVE -----	(CONTINUED)	
		20000-27777	32768 THROUGH 36863	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION

5.2-632

MIL-STD-6016B

FIELD CODING FOR J12.5I

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	010	TRACK NUMBER, OBJECTIVE -----	(CONTINUED)	
		70000-77776	114688 THROUGH 118782	REPORTING, E.G., TRACKS AND REFERENCE POINTS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
769	048	TRACK NUMBER, INDEX ORIGINATOR A -----		THE TN OF THE UNIT ORIGINATING THE INDEX NUMBER.
		NO STATEMENT	0	
		NUMERIC	00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		ILLEGAL	00077 (OCTAL)	
		NUMERIC	00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC	00177 (OCTAL)	COLLECTIVE ADDRESS.
		NUMERIC	00200 THROUGH 07776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL	07777 (OCTAL)	
		NUMERIC	10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
768	003	INDEX NUMBER, A -----		THE INDEX NUMBER ASSIGNED BY ORIGINATOR (A).
		NO STATEMENT	0	

5.2-633

MIL-STD-6016B

FIELD CODING FOR J12.5I

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
768	003	INDEX NUMBER, A ----- NUMERIC	(CONTINUED) 1 THROUGH 63	A VALUE ASSIGNED BY THE ORIGINATOR TO DIFFERENTIATE AMONG SENSOR TARGET REPORTS.
1862	002	CORRELATION INDICATOR, A ----- DECORRELATED CORRELATED	 0 1	INDICATES WHETHER OR NOT THE ASSO- CIATED INDEX ORIGINATOR TN AND INDEX NUMBER ARE CORRELATED WITH THE OBJECTIVE TN.
376	002	IDENTITY, EVALUATED ----- PENDING UNKNOWN ASSUMED FRIEND FRIEND NEUTRAL SUSPECT HOSTILE UNDEFINED	 0 1 2 3 4 5 6 7	REPORTS THE C2 EVALUATED IDENTITY OF A CORRELATED NONC2 JU TRACK. A TRACK WHICH HAS NOT BEEN SUBJECTED TO THE IDENTIFICATION PROCESS. AN EVALUATED TRACK WHICH HAS NOT BEEN IDENTIFIED. A TRACK WHICH IS ASSUMED TO BE A FRIEND BECAUSE OF ITS CHARACTERISTICS, BEHAVIOR, OR ORIGIN. A TRACK BELONGING TO A DECLARED FRIENDLY NATION. A TRACK WHOSE CHARACTERISTICS, BEHAVIOR, ORIGIN, OR NATIONALITY INDICATE THAT IT IS NEITHER SUPPORTING NOR OPPOSING FRIENDLY FORCES. A TRACK WHICH IS POTENTIALLY HOSTILE BECAUSE OF ITS CHARACTERISTICS, BEHAVIOR, ORIGIN, OR NATIONALITY. A TRACK DECLARED TO BELONG TO ANY OPPOSING NATION, PARTY, GROUP, OR ENTITY, WHICH BY VIRTUE OF ITS BEHAVIOR OR INFORMATION COLLECTED ON IT SUCH AS CHARACTERISTICS, ORIGIN OR NATIONALITY CONTRIBUTES TO THE THREAT TO FRIENDLY FORCES.
386	003	STRENGTH, EVALUATED ----- NO STATEMENT	 0	REPORTS THE C2 EVALUATED STRENGTH OF A CORRELATED NONC2 JU TRACK.

5.2-634

MIL-STD-6016B

FIELD CODING FOR J12.5I

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
386	003	STRENGTH, EVALUATED -----	(CONTINUED)	
		1 UNIT	1	
		2 UNITS	2	
		3 UNITS	3	
		4 UNITS	4	
		5 UNITS	5	
		6 UNITS	6	
		7 UNITS	7	
		8 UNITS	8	
		9 UNITS	9	
		10 UNITS	10	
		11 UNITS	11	
		12 UNITS	12	
		2 THROUGH 7 (FEW) UNITS	13	
		GREATER THAN 7 (MANY) UNITS	14	
		GREATER THAN 12 UNITS	15	
1926	001	ID/STRENGTH INDICATOR -----		INDICATES WHETHER THE IDENTITY AND STRENGTH ARE BASED ON A NONC2 JU REPORT OR A SURVEILLANCE TRACK REPORT.
		DO NOT INTERPRET THE EVALUATED IDENTITY AND EVALUATED STRENGTH FIELDS.	0	
		FROM NONC2 JU REPORT	1	THE EVALUATED IDENTITY AND EVALUATED STRENGTH FIELDS ARE BASED ON THE IDENTITY AND STRENGTH REPORTED IN A PREVIOUS J12.6 MESSAGE.
		FROM SURVEILLANCE TRACK REPORT	2	THE EVALUATED IDENTITY AND EVALUATED STRENGTH FIELDS ARE BASED ON A CORRELATED SURVEILLANCE TRACK REPORT.
		UNDEFINED	3	

5.2-635

MIL-STD-6016B

.....

WORD TITLE: TARGET/TRACK CORRELATION EXTENSION WORD 1

49	48	47	46:	45:	44	43	42	41	40	39:	38	37	36	35	34	33	32	31	30	29	28	27	26	25
			:COR:								:													
<---			:INC:	INDEX NUMBER, C							:	TRACK NUMBER, INDEX ORIGINATOR C												
			: :								:													
			: 1 :	6							:	15												

[illegible]

WORD DESCRIPTION

WORD NUMBER: J12.5E0

WORD TITLE: TARGET/TRACK CORRELATION EXTENSION WORD 1

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550 001		WORD FORMAT	0-	1 2	10
769 049		TRACK NUMBER, INDEX ORIGINATOR	2-	16 15	
		B			
768 004		INDEX NUMBER, B	17-	22 6	
1862 003		CORRELATION INDICATOR, B	23	1	
		(COR INB)			
769 050		TRACK NUMBER, INDEX ORIGINATOR	24-	38 15	SAME CODING AS FOR BITS 2-16.
		C			
768 005		INDEX NUMBER, C	39-	44 6	SAME CODING AS FOR BITS 17-22.
1862 004		CORRELATION INDICATOR, C	45	1	SAME CODING AS FOR BIT 23.
		(COR INC)			
769 051		TRACK NUMBER, INDEX ORIGINATOR	46-	60 15	SAME CODING AS FOR BITS 2-16.
		D			
768 006		INDEX NUMBER, D	61-	66 6	SAME CODING AS FOR BITS 17-22.
1862 005		CORRELATION INDICATOR, D	67	1	SAME CODING AS FOR BIT 23.
		(COR IND)			
756 002		SPARE (SP)	68-	69 2	

FIELD CODING FOR J12.5E0

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	049	TRACK NUMBER, INDEX ORIGINATOR B -----		THE TN OF THE UNIT ORIGINATING THE INDEX NUMBER.
		NO STATEMENT	0	
		NUMERIC	00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		ILLEGAL	00077 (OCTAL)	
		NUMERIC	00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC	00177 (OCTAL)	COLLECTIVE ADDRESS.
		NUMERIC	00200 THROUGH 07776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL	07777 (OCTAL)	
		NUMERIC	10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
768	004	INDEX NUMBER, B -----		THE INDEX NUMBER ASSIGNED BY ORIGINATOR (B).
		NO STATEMENT	0	
		NUMERIC	1 THROUGH 63	A VALUE ASSIGNED BY THE ORIGINATOR TO DIFFERENTIATE AMONG SENSOR TARGET REPORTS.
1862	003	CORRELATION INDICATOR, B -----		INDICATES WHETHER OR NOT THE ASSO- CIATED INDEX ORIGINATOR TN AND INDEX NUMBER ARE CORRELATED WITH THE OBJECTIVE TN.
		DECORRELATED	0	
		CORRELATED	1	

5.2-638

MIL-STD-6016B

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: TARGET/TRACK CORRELATION EXTENSION WORD 2

	24:	23:	22	21	20	19	18	17:	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02:	01	00:	
<---	:	COR:						:																:	WORD	:
	:	INE:					INDEX NUMBER, E	:																:	FORMAT	:
	:	:						:																:		:
	:	1	:			6		:								15							:	2	:	

49	48	47	46:	45:	44	43	42	41	40	39:	38	37	36	35	34	33	32	31	30	29	28	27	26	25
			:COR:						:															
<---			:INF:		INDEX NUMBER, F					:		TRACK NUMBER, INDEX ORIGINATOR F												
			:						:															
			: 1 :		6					:		15												

:	69	:	68:	:	67:	:	66	:	65	:	64	:	63	:	62	:	61:	:	60	:	59	:	58	:	57	:	56	:	55	:	54	:	53	:	52	:	51	:	50		
:		:	COR:	:		:		:		:		:		:		:		:		:		:		:		:		:		:		:		:		:		:		:	
:	SP	:	ING:	:		:	INDEX	:	NUMBER,	:	G	:		:		:		:		:		:		:		:		:		:		:		:		:		:		:	
:		:	:	:		:		:		:		:		:		:		:		:		:		:		:		:		:		:		:		:		:		:	
:	2	:	1	:		:	6	:		:		:		:		:		:		:		:		:		:		:	15	:		:		:		:		:		:	

WORD DESCRIPTION

WORD NUMBER: J12.5E1
WORD TITLE: TARGET/TRACK CORRELATION EXTENSION WORD 2

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550 001		WORD FORMAT	0-	1 2	10
769 052		TRACK NUMBER, INDEX ORIGINATOR	2-	16 15	
		E			
768 007		INDEX NUMBER, E	17-	22 6	
1862 006		CORRELATION INDICATOR, E	23	1	
		(COR INE)			
769 053		TRACK NUMBER, INDEX ORIGINATOR	24-	38 15	SAME CODING AS FOR BITS 2-16.
		F			
768 008		INDEX NUMBER, F	39-	44 6	SAME CODING AS FOR BITS 17-22.
1862 007		CORRELATION INDICATOR, F	45	1	SAME CODING AS FOR BIT 23.
		(COR INF)			
769 054		TRACK NUMBER, INDEX ORIGINATOR	46-	60 15	SAME CODING AS FOR BITS 2-16.
		G			
768 009		INDEX NUMBER, G	61-	66 6	SAME CODING AS FOR BITS 17-22.
1862 008		CORRELATION INDICATOR, G	67	1	SAME CODING AS FOR BIT 23.
		(COR ING)			
756 002		SPARE (SP)	68-	69 2	

FIELD CODING FOR J12.5E1

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	052	TRACK NUMBER, INDEX ORIGINATOR E -----		THE TN OF THE UNIT ORIGINATING THE INDEX NUMBER.
		NO STATEMENT NUMERIC	0 00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		ILLEGAL NUMERIC	00077 (OCTAL) 00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC	00177 (OCTAL)	COLLECTIVE ADDRESS.
		NUMERIC	00200 THROUGH 07776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL NUMERIC	07777 (OCTAL) 10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
768	007	INDEX NUMBER, E -----		THE INDEX NUMBER ASSIGNED BY ORIGINATOR (E).
		NO STATEMENT NUMERIC	0 1 THROUGH 63	A VALUE ASSIGNED BY THE ORIGINATOR TO DIFFERENTIATE AMONG SENSOR TARGET REPORTS.
1862	006	CORRELATION INDICATOR, E -----		INDICATES WHETHER OR NOT THE ASSO- CIATED INDEX ORIGINATOR TN AND INDEX NUMBER ARE CORRELATED WITH THE OBJECTIVE TN.
		DECORRELATED	0	
		CORRELATED	1	

5.2-642

MIL-STD-6016B

MIL-STD-6016B

J12.6 MESSAGE SUMMARY

PURPOSE

The J12.6 Target Sorting message is used to (a) enable nonC² JUs to exchange targets and targeting information among themselves, (b) pass sensor data to C² JUs and among nonC² JUs, (c) pass nonC² JU engagement status information between nonC² JUs and from nonC² JUs to C² JUs, and (d) provide control among nonC² JUs.

DATA ELEMENT SUMMARY

<u>J12.6I</u>		<u>J12.6C1 (Continued)</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	POINTER	1
LABEL, J-SERIES	5	WEAPON SYSTEM	5
SUBLABEL, J-SERIES	3	WEAPON ENGAGEMENT STATUS	4
MESSAGE LENGTH INDICATOR	3	TRACK NUMBER, REFERENCE	19
STATUS INFORMATION DISCRETE	4	MODE III IFF INTERROGATION	2
TARGET POSITION QUALITY	2	MODE IV INDICATOR	2
ENVIRONMENT/CATEGORY	3	STRENGTH	4
ORIGIN OF INDEX NUMBER	1	SPARE	5
INDEX NUMBER	6		
LATITUDE, 0.0103 MINUTE	20		
LONGITUDE, 0.0103 MINUTE	21		
<u>J12.6E0</u>		<u>J12.6C2</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	WORD FORMAT	2
TRACK NUMBER, OBJECTIVE	19	CONTINUATION WORD LABEL	5
CORRELATION INDICATOR, TN/IN	1	END OF TARGET REPORTING CYCLE	1
COURSE	9	TIME INDICATOR	3
SPEED	11	MINUTE	6
ALTITUDE, 100 FT	11	SECOND	6
IDENTITY(3)*****		HUNDREDTHS	7
IDENTITY AMPLIFYING *	3	EMITTER PRF	3
DESCRIPTOR(3)*****		EMITTER STATUS	3
EXERCISE INDICATOR	1	JAMMER TYPE	3
SPACE SPECIFIC TYPE(12)*****		SPARE	5
AIR SPECIFIC TYPE(12) *		TRACK NUMBER, INDEX ORIGINATOR	15
SURFACE (MARITIME) SPECIFIC *		INDEX NUMBER, THIRD PARTY	6
TYPE(12) *		SENSOR TYPE	4
SUBSURFACE (MARITIME) SPECIFIC *		FUSION TYPE	1
TYPE(12) *			
LAND (GROUND) SPECIFIC *			
TYPE(12) *	12		
SPARE(12)*****			
SPECIAL INTEREST INDICATOR	1		
<u>J12.6C1</u>		<u>J12.6C3</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	WORD FORMAT	2
CONTINUATION WORD LABEL	5	CONTINUATION WORD LABEL	5
SPARE	6	SLANT RANGE POSITION	4
TRACK NUMBER, ADDRESSEE	15	UNCERTAINTY	
		CROSS RANGE POSITION	4
		UNCERTAINTY	
		VERTICAL POSITION UNCERTAINTY	4
		UNCERTAINTY ORIENTATION	11
		UNCERTAINTY TILT	11
		VELOCITY, DOWN	13
		VELOCITY NORTH UNCERTAINTY	4
		VELOCITY EAST UNCERTAINTY	4

MIL-STD-6016B

J12.6 MESSAGE SUMMARY (Continued)

DATA ELEMENT SUMMARY (Continued)

<u>J12.6C3 (Continued)</u>	
DATA ELEMENT	# BITS
VELOCITY DOWN UNCERTAINTY	4
SPARE	4

<u>J12.6C4</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
CONTINUATION WORD LABEL	5
PROBABILITY OF OWN FORCES	9
PROBABILITY OF ENEMY FORCES	9
SPACE AMBIGUOUS TYPE 1(12)*****	*
AIR AMBIGUOUS TYPE 1(12)	*
SURFACE (MARITIME) AMBIGUOUS TYPE 1(12)	*
SUBSURFACE (MARITIME) AMBIGUOUS TYPE 1(12)	*
LAND (GROUND) AMBIGUOUS TYPE 1(12)	*
SPARE(12)*****	12
SPACE AMBIGUOUS TYPE 2(12)*****	*
AIR AMBIGUOUS TYPE 2(12)	*
SURFACE (MARITIME) AMBIGUOUS TYPE 2(12)	*
SUBSURFACE (MARITIME) AMBIGUOUS TYPE 2(12)	*
LAND (GROUND) AMBIGUOUS TYPE 2(12)	*
SPARE(12)*****	12
AMBIGUOUS TYPE 1 PROBABILITY	9
AMBIGUOUS TYPE 2 PROBABILITY	9
SPARE	3

<u>J12.6C5</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
CONTINUATION WORD LABEL	5
FUTURE EVENT DESCRIPTOR	3
TIME OF EVENT, MINUTE	6
TIME OF EVENT, SECOND	6
TIME OF EVENT, HUNDREDTHS	7
EVENT DURATION, SECONDS	6
EVENT DURATION, HUNDREDTHS	7
SPARE	28

<u>J12.6C6</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
CONTINUATION WORD LABEL	5
SENSOR TYPE INDICATOR	3

<u>J12.6C6 (Continued)</u>	
DATA ELEMENT	# BITS
SENSOR STATUS/COMMAND INDICATOR	1
SENSOR CHANNEL/CODE	12
SENSOR CHANNEL SET	5
FREQUENCY AGILITY INDICATOR	2
PDI INDICATOR	1
PDI/MISSILE DATA LINK CHANNEL	9
AIR-GROUND WEAPON DATA LINK CHANNEL	5
WEAPON ID	5
RADAR PRF	3
ARM THREAT NUMBER	8
ARM TYPE	4
SPARE	5

<u>J12.6C7</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
CONTINUATION WORD LABEL	5
VARIANCE XX	8
VARIANCE YY	8
VARIANCE ZZ	8
VARIANCE XY	9
VARIANCE XZ	9
VARIANCE YZ	9
DIVE ANGLE	8
SPARE	4

MIL-STD-6016B

J12.6 TRANSMIT/RECEIVE RULES

TITLE: Target Sorting Message

NETWORK PG - TRANSMIT RULES

1. The J12.6 Target Sorting message shall be transmitted periodically by nonC² JUs and may be transmitted periodically by C² JUs responsible for controlling the weapon systems. Tables J12-4.1 through J12-4.6 indicates the required word sequences and periodic update rates for each Status Information Discrete field value.

2. The J12.6 message shall be used for nonC² JUs' radar derived target position reports, and for non-radar derived target position reports when there is a 95% probability that the target is within a 4.4 square data mile area.

3. If the number of targets to be reported is 1, the J12.6C1 word need not be transmitted only to report target strength. If target strength to be reported is greater than one, the J12.6C1 word must be transmitted initially and with each update.

4. The J12.6I and J12.6E0 Target Sorting initial and extension words shall be transmitted in every transmission of the message, except that the J12.6E0 word may be omitted:

a. When reporting a J12.6 (SID = 5) Cancel Sensor Target Report for an uncorrelated target.

b. When reporting a J12.6 (SID = 0) message with the Pointer field set to call the attention of another JU to a geographic location only.

The required word sequences for J12.6 continuation words shall be as specified in Table J12-4.

5. To address a J12.6 message the J12.6C1 word shall be included in the applicable sequence.

J12.6 TRANSMIT/RECEIVE RULES (Continued)

NETWORK PG - TRANSMIT RULES (Continued)

6. To report sensor fusion uncertainty the J12.6C2/J12.6C3 words shall be transmitted periodically in a J12.6I/J12.6E0/J12.6C2/J12.6C3 word sequence. Time in the J12.6C2 word relates to all target data except that the Latitude and Longitude fields shall be extrapolated to the time of transmission.
7. The J12.6C4 word shall be transmitted as follows:
 - a. At the first transmission of the J12.6I word after target identification is initially evaluated.
 - b. Every 8 transmissions of the J12.6I word.
 - c. At the next periodic transmission of the J12.6I word after any data in the J12.6C4 word changes.
8. To transmit sensor management data a J12.6I/J12.6E0/J12.6C5/J12.6C6 word sequence shall be used.
9. To report the end of a target reporting cycle relating to the specific sensor type reported, a J12.6C2 word is included in the applicable word sequence.
10. The J12.6C6 word may be included in any word sequence to report or command weapon and/or sensor system parameters.
11. If a nonC² JU directs a change of engagement with a target to another nonC² JU, then the J12.6C1 word shall be transmitted two times in a J12.6I/J12.6E0/J12.6C1 word sequence.
12. A JU shall transmit a J12.6 message at least once when the Pointer field is set to call the attention of another JU to a sensor target, track, or geographic location. If the Pointer field is set to call the attention of another JU to a specific sensor target or track, a J12.6I/J12.6E0/J12.6C1 word sequence shall be used. If the Pointer field is set to call the

J12.6 TRANSMIT/RECEIVE RULES (Continued)

NETWORK PG - TRANSMIT RULES (Continued)

attention of another JU to only a geographic location, the J12.6E0 word may be omitted from the word sequence.

13. When the results of an IFF interrogation of the target become available, a nonC² JU shall include the J12.6C1 word in the next two successive transmissions of the message reporting that target.

14. If a C² JU implements the capability to report tracks in a J12.6 message for the benefit of nonC² JUs, such a message may include engagement status data relating to units not operating on the C² JU's control NPG. To report engagement status in this manner the following applies:

a. To report engagements, the J12.6C1 Engagement Status continuation word shall be included in the initial report and each subsequent update in a J12.6I/J12.6E0/J12.6C1 word sequence at an RRN of 7 (6 seconds, 3-9 second interval).

b. To report the breaking of an engagement, the J12.6C1 Engagement Status continuation word shall be transmitted two times at an RRN of 7 (6 seconds, 3-9 second interval) in a J12.6I/J12.6E0/J12.6C1 word sequence.

15. If a nonC² JU reports an engagement in a J12.6 message, the SID field shall be used to report the status of the engagement. If the J12.6C1 word is included:

a. When operating on other than Needline PGs, the WES field shall be set to value 0, No Statement.

b. When operating on Needline PGs, the WES field shall be set in accordance with table 4.12-4, or else set to value 0, No Statement.

J12.6 TRANSMIT/RECEIVE RULES (Continued)

NETWORK PG - RECEIVE RULES

There are no receive rules specified for this message, therefore any valid word combination shall be accepted.

NEEDLINE PG - TRANSMIT RULES

1. All transmit rules in Network PG are applicable to Needline PG.
2. The J12.6C7 Kinematic Data 1 continuation word shall be transmitted by a nonC² JU, when vertical velocity and tracking error data are available, in a J12.6I/J12.6E0/J12.6C7 word sequence, periodically with a RRN between 9 (1,5 second, 1-2 second interval) and 6 (12 seconds interval).

NEEDLINE PG - RECEIVE RULES

All receive rules specified for this message to Network PG are applicable to Needline PGs.

Table J12-4.1. J12.6 Required Word Sequences, Message Priorities, and Periodic Update Rates for Status Information Discrete Environment/Category = 0, No Statement/Unknown (Sheet 1 of 1)

STATUS INFORMATION DISCRETE VALUE	J12.6 WORD SEQUENCE REQUIRED			PERIODIC UPDATE RATE (RRN)	STATUS INFORMATION DISCRETE VALUE DESCRIPTOR
	I	E0	C1		
0 - NO STATEMENT	X	-	X	N/A	GEOGRAPHIC POINTER
1-15 - UNDEFINED	-	-	-	-	-

Table J12-4.2. J12.6 Required Word Sequences, Message Priorities, and Periodic Update Rates for Status Information Discrete Environment/Category = 1, Space (Sheet 1 of 1)

STATUS INFORMATION DISCRETE VALUE	J12.6 WORD SEQUENCE REQUIRED			PERIODIC UPDATE RATE (RRN)	STATUS INFORMATION DISCRETE VALUE DESCRIPTOR
	I	E0	C1		
0 - NO STATEMENT	TBD	TBD	TBD	TBD	TBD
1-15 - UNDEFINED	-	-	-	-	-

Table J12-4.3. J12.6 Required Word Sequences, Message Priorities, and Periodic Update Rates for Status Information Discrete Environment/Category = 2, Air (Sheet 1 of 2)

STATUS INFORMATION DISCRETE VALUE	J12.6 ¹ WORD SEQUENCE REQUIRED			PERIODIC UPDATE RATE (RRN)	STATUS INFORMATION DISCRETE VALUE DESCRIPTOR
	I	E0	C1		
FOR NONC ² JU TO NONC ² JU, NONC ² JU TO C ² JU, AND C ² JU TO NONC ² JU					
0 - NO STATEMENT	X	5	X	7(6 SECS) ⁴	UPDATES TARGET/TRACK DATA.
FOR NONC ² JU TO NONC ² JU AND NONC ² JU TO C ² JU					
1 - ENGAGING	X	X	2	7(6 SECS) ⁴	THE SOURCE TN IS ENGAGING THE SPECIFIED AIR TRACK/TARGET.
2 - INVESTIGATING	X	X	2	7(6 SECS) ⁴	THE SOURCE TN IS INVESTIGATING THE SPECIFIED AIR TRACK/TARGET.
3 - MISSILE IN FLIGHT/ WEAPON RELEASED	X	X	2	7(6 SECS) ⁴	THE SOURCE TN HAS LAUNCHED A MISSILE/RELEASED A WEAPON AGAINST THE SPECIFIED AIR TRACK/TARGET.
4 - NEW SENSOR TARGET REPORT ³	X	X	2	N/A	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE AT LEAST ONCE TO INDICATE THIS REPORT IS A NEW SENSOR TARGET. SUBSEQUENT PERIODIC TRANSMISSIONS OF THE J12.6 MESSAGE WILL BE WITH THE APPLICABLE STATUS INFORMATION DISCRETE VALUE SET.
5 - CANCEL SENSOR TARGET REPORT	X	-	-	N/A	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE AT LEAST ONCE TO INDICATE IT IS NO LONGER REPORTING THE SPECIFIED TRACK/TARGET.
6 - TRACK/TARGET DESTROYED	X	X	-	7(6 SECS) ⁴	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE TO INDICATE THE AIR TRACK/TARGET HAS BEEN DESTROYED AND IS NO LONGER A THREAT. THIS STATUS INFORMATION DISCRETE SHALL BE TRANSMITTED UNTIL SENSOR CONTACT IS CANCELLED/LOST. FOR A TARGET NOT HELD ON OWN SENSOR, THIS STATUS INFORMATION DISCRETE SHALL BE TRANSMITTED AT LEAST TWICE.
7 - DISENGAGING	X	X	-	N/A	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE AT LEAST TWICE TO INDICATE A DISENGAGEMENT OF THE SPECIFIED AIR TRACK/TARGET. THE SOURCE TN SHALL THEN TRANSMIT THE APPROPRIATE STATUS INFORMATION DISCRETE VALUE.
8 - TARGET PARTIALLY DESTROYED	X	X	-	N/A	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE AT LEAST TWICE TO INDICATE THE TARGET IS PARTIALLY DESTROYED. THE SOURCE TN SHALL THEN REVERT TO SID = 0 IF THE TARGET/TRACK IS STILL HELD ON A SENSOR.
9 - HEADS UP	X	X	2	7(6 SECS) ⁴	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE TO ALERT OTHER UNITS THAT THE TARGET CONSTITUTES A THREAT TO FRIENDLY FORCES. THE SOURCE TN IS UNABLE TO ASSURE COMPLETE DESTRUCTION. THIS VALUE DOES NOT REPORT EITHER AN ENGAGEMENT OR THE BREAKING OF AN ENGAGEMENT.

5.2-650

MIL-STD-6016B

Table J12-4.3. J12.6 Required Word Sequences, Message Priorities, and Periodic Update Rates for Status Information Discrete Environment/Category = 2, Air (Sheet 2 of 2)

STATUS INFORMATION DISCRETE VALUE	J12.6 ¹ WORD SEQUENCE REQUIRED			PERIODIC UPDATE RATE (RRN)	STATUS INFORMATION DISCRETE VALUE DESCRIPTOR
	I	E0	C1		
10 - LOCK ON/ PRIMARY DESIGNATED TARGET (PDT)	X	X	2	7(6 SECS) ⁴	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE TO INDICATE A SENSOR ACQUISITION HAS BEEN OBTAINED ON THE SPECIFIED AIR TRACK/TARGET AND/OR THE TARGET IS THE PDT.
11 - NOT EFFECTIVE	X	X	-	N/A	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE AT LEAST TWICE TO INDICATE A MISS OR ABORT ON THE SPECIFIED AIR TRACK/TARGET. THE SOURCE TN SHALL CONTINUE THE ENGAGEMENT.
12 - COVERING	X	X	2	7(6 SECS) ⁴	THE SOURCE TN IS COVERING THE SPECIFIED AIR TRACK/TARGET.
FOR NONC ² JU TO NONC ² JU ONLY					
13 - INVESTIGATE	X	X	X	N/A	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE TWICE TO A SPECIFIC ADDRESSEE TN. THE ADDRESSEE TN SHALL TRANSMIT STATUS INFORMATION DISCRETE VALUE = 2 WHEN THE ORDER HAS BEEN COMPLIED WITH.
14 - ENGAGE	X	X	X	N/A	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE TWICE TO A SPECIFIC ADDRESSEE TN. THE ADDRESSEE TN SHALL TRANSMIT STATUS INFORMATION DISCRETE VALUE = 1 WHEN THE ORDER HAS BEEN COMPLIED WITH.
15 - DISENGAGE	X	X	X	N/A	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE TWICE TO A SPECIFIC ADDRESSEE TN. THE ADDRESSEE TN SHALL CEASE TRANSMITTING STATUS INFORMATION DISCRETE VALUE = 1 OR 2 AND TRANSMIT STATUS INFORMATION DISCRETE VALUE = 7 WHEN THE ORDER HAS BEEN COMPLIED WITH.

NOTES

- ¹ See transmit rules.
- ² Must be transmitted if target strength greater than 1 is reported.
- ³ The use of SID value 4 for new sensor targets shall not be required, but is permitted, if the target begins in the lock on/PDT condition. In this circumstance, SID value 10, Lock On/PDT, may be used in the first message and SID value 4, New Sensor Target Report, need not be used.
- ⁴ A periodic update rate at an RRN of 8(3 seconds) shall be utilized for transmission on the NonC² JU-to-NonC² JU NPG.
- ⁵ Must be transmitted if reporting other than a geographic location pointer.

Table J12-4.4. J12.6 Required Word Sequences, Message Priorities, and Periodic Update Rates for Status Information Discrete Environment/Category = 3, Surface (Maritime) (Sheet 1 of 2)

STATUS INFORMATION DISCRETE VALUE	J12.6 ¹ WORD SEQUENCE REQUIRED			PERIODIC UPDATE RATE (RRN)	STATUS INFORMATION DISCRETE VALUE DESCRIPTOR
	I	E0	C1		
FOR NONC ² JU TO NONC ² JU, NONC ² JU TO C ² JU, AND C ² JU TO NONC ² JU					
0 - NO STATEMENT	X	5	X	7(6 SECS) ⁴	UPDATES TARGET/TRACK DATA.
FOR NONC ² JU TO NONC ² JU AND NONC ² JU TO C ² JU					
1 - ATTACKING	X	X	2	7(6 SECS) ⁴	THE SOURCE TN IS ATTACKING THE SPECIFIED SURFACE (MARITIME) TRACK/TARGET.
2 - INVESTIGATING	X	X	2	7(6 SECS) ⁴	THE SOURCE TN IS INVESTIGATING THE SPECIFIED SURFACE (MARITIME) TRACK/TARGET.
3 - MISSILE IN FLIGHT/ WEAPON RELEASED	X	X	2	7(6 SECS) ⁴	THE SOURCE TN HAS LAUNCHED A MISSILE/RELEASED A WEAPON AGAINST THE SPECIFIED SURFACE (MARITIME) TRACK/TARGET.
4 - NEW SENSOR TARGET REPORT ³	X	X	2	N/A	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE AT LEAST ONCE TO INDICATE THIS REPORT IS A NEW SENSOR TARGET. SUBSEQUENT PERIODIC TRANSMISSIONS OF THE J12.6 MESSAGE WILL BE WITH THE APPLICABLE STATUS INFORMATION DISCRETE VALUE SET.
5 - CANCEL SENSOR TARGET REPORT	X	-	-	N/A	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE AT LEAST ONCE TO INDICATE IT IS NO LONGER REPORTING THE SPECIFIED TRACK/TARGET.
6 - TRACK/TARGET DESTROYED	X	X	-	7(6 SECS) ⁴	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE TO INDICATE THE SURFACE (MARITIME) TRACK/TARGET HAS BEEN DESTROYED AND IS NO LONGER A THREAT. THIS STATUS INFORMATION DISCRETE SHALL BE TRANSMITTED UNTIL SENSOR CONTACT IS CANCELLED/LOST. FOR A TARGET NOT HELD ON OWN SENSOR, THIS STATUS INFORMATION DISCRETE SHALL BE TRANSMITTED AT LEAST TWICE.
7 - DISENGAGING	X	X	-	N/A	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE AT LEAST TWICE TO INDICATE A DISENGAGEMENT OF THE SPECIFIED SURFACE (MARITIME) TRACK/TARGET. THE SOURCE TN SHALL THEN TRANSMIT THE APPROPRIATE STATUS INFORMATION DISCRETE VALUE.
8 - TARGET PARTIALLY DESTROYED	X	X	-	N/A	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE AT LEAST TWICE TO INDICATE THE TARGET IS PARTIALLY DESTROYED. THE SOURCE TN SHALL THEN REVERT TO SID = 0 IF THE TARGET/TRACK IS STILL HELD ON A SENSOR.
9 - MARK POINT/ POINT OF INTEREST	X	X	-	N/A	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE AT LEAST TWICE TO INDICATE A POINT OF INTEREST OR POTENTIAL TARGET OF OPPORTUNITY.

Table J12-4.4. J12.6 Required Word Sequences, Message Priorities, and Periodic Update Rates for Status Information Discrete Environment/Category = 3, Surface (Maritime) (Sheet 2 of 2)

STATUS INFORMATION DISCRETE VALUE	J12.6 ¹ WORD SEQUENCE REQUIRED			PERIODIC UPDATE RATE (RRN)	STATUS INFORMATION DISCRETE VALUE DESCRIPTOR
	I	E0	C1		
10 - LOCK ON/ DESIGNATED SURFACE TARGET (DST)	X	X	2	7(6 SECS) ⁴	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE TO INDICATE A SENSOR ACQUISITION HAS BEEN OBTAINED ON THE SPECIFIED SURFACE (MARITIME) TRACK/TARGET AND/OR THE TARGET IS THE DST.
11 - BATTLE DAMAGE ASSESSMENT UNKNOWN	X	X	-	N/A	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE AT LEAST TWICE TO INDICATE THAT THE BATTLE DAMAGE IS UNKNOWN.
12 - RECOMMEND REATTACK	X	X	-	N/A	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE AT LEAST TWICE TO RECOMMEND THAT ANOTHER MISSION BE CONDUCTED AGAINST THE TARGET.
FOR NONC ² JU TO NONC ² JU ONLY					
13 - INVESTIGATE	X	X	X	N/A	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE TWICE TO A SPECIFIC ADDRESSEE TN. THE ADDRESSEE TN SHALL TRANSMIT STATUS INFORMATION DISCRETE VALUE = 2 WHEN THE ORDER HAS BEEN COMPLIED WITH.
14 - ENGAGE	X	X	X	N/A	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE TWICE TO A SPECIFIC ADDRESSEE TN. THE ADDRESSEE TN SHALL TRANSMIT STATUS INFORMATION DISCRETE VALUE = 1 WHEN THE ORDER HAS BEEN COMPLIED WITH.
15 - DISENGAGE	X	X	X	N/A	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE TWICE TO A SPECIFIC ADDRESSEE TN. THE ADDRESSEE TN SHALL CEASE TRANSMITTING STATUS INFORMATION DISCRETE VALUE = 1 OR 2 AND TRANSMIT STATUS INFORMATION DISCRETE VALUE = 7 WHEN THE ORDER HAS BEEN COMPLIED WITH.

NOTES

- ¹ See transmit rules.
- ² Must be transmitted if target strength greater than 1 is reported.
- ³ The use of SID value 4 for new sensor targets shall not be required, but is permitted, if the target begins in the lock on/DST condition. In this circumstance, SID value 10, Lock On/DST, may be used in the first message and SID value 4, New Sensor Target Report, need not be used.
- ⁴ A periodic update rate at an RRN of 8(3 seconds) shall be utilized for transmission on the NonC² JU-to-NonC² JU NPG.
- ⁵ Must be transmitted if reporting other than a geographic location pointer.

Table J12-4.5. J12.6 Required Word Sequences, Message Priorities, and Periodic Update Rates for Status Information Discrete Environment/Category = 4, Subsurface (Maritime) (Sheet 1 of 1)

STATUS INFORMATION DISCRETE VALUE	J12.6 WORD SEQUENCE REQUIRED			PERIODIC UPDATE RATE (RRN)	STATUS INFORMATION DISCRETE VALUE DESCRIPTOR
	I	E0	C1		
0 - NO STATEMENT	TBD	TBD	TBD	TBD	TBD
1-15 - UNDEFINED	-	-	-	-	-

Table J12-4.6. J12.6 Required Word Sequences, Message Priorities, and Periodic Update Rates for Status Information Discrete Environment/Category = 5, Land (Ground) (Sheet 1 of 2)

STATUS INFORMATION DISCRETE VALUE	J12.6 ¹ WORD SEQUENCE REQUIRED			PERIODIC UPDATE RATE (RRN)	STATUS INFORMATION DISCRETE VALUE DESCRIPTOR
	I	E0	C1		
FOR NONC ² JU TO NONC ² JU, NONC ² JU TO C ² JU, AND C ² JU TO NONC ² JU					
0 - NO STATEMENT	X	5	X	7(6 SECS) ⁴	UPDATES TARGET/TRACK DATA.
FOR NONC ² JU TO NONC ² JU AND NONC ² JU TO C ² JU					
1 - ATTACKING	X	X	2	7(6 SECS) ⁴	THE SOURCE TN IS ATTACKING THE SPECIFIED LAND (GROUND) TRACK/TARGET.
2 - INVESTIGATING	X	X	2	7(6 SECS) ⁴	THE SOURCE TN IS INVESTIGATING THE SPECIFIED LAND (GROUND) TRACK/TARGET.
3 - MISSILE IN FLIGHT/ WEAPON RELEASED	X	X	2	7(6 SECS) ⁴	THE SOURCE TN HAS LAUNCHED A MISSILE/RELEASED A WEAPON AGAINST THE SPECIFIED LAND (GROUND) TRACK/TARGET.
4 - NEW SENSOR TARGET REPORT ³	X	X	2	N/A	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE AT LEAST ONCE TO INDICATE THIS REPORT IS A NEW SENSOR TARGET. SUBSEQUENT PERIODIC TRANSMISSIONS OF THE J12.6 MESSAGE WILL BE WITH THE APPLICABLE STATUS INFORMATION DISCRETE VALUE SET.
5 - CANCEL SENSOR TARGET REPORT	X	-	-	N/A	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE AT LEAST ONCE TO INDICATE IT IS NO LONGER REPORTING THE SPECIFIED TRACK/TARGET.
6 - TRACK/TARGET DESTROYED	X	X	-	7(6 SECS) ⁴	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE TO INDICATE THE LAND (GROUND) TRACK/TARGET HAS BEEN DESTROYED AND IS NO LONGER A THREAT. THIS STATUS INFORMATION DISCRETE SHALL BE TRANSMITTED UNTIL SENSOR CONTACT IS CANCELLED/LOST. FOR A TARGET NOT HELD ON OWN SENSOR, THIS STATUS INFORMATION DISCRETE SHALL BE TRANSMITTED AT LEAST TWICE.
7 - DISENGAGING	X	X	-	N/A	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE AT LEAST TWICE TO INDICATE A DISENGAGEMENT OF THE SPECIFIED LAND (GROUND) TRACK/TARGET. THE SOURCE TN SHALL THEN TRANSMIT THE APPROPRIATE STATUS INFORMATION DISCRETE VALUE.
8 - TARGET PARTIALLY DESTROYED	X	X	-	N/A	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE AT LEAST TWICE TO INDICATE THE TARGET IS PARTIALLY DESTROYED. THE SOURCE TN SHALL THEN REVERT TO SID = 0 IF THE TARGET/TRACK IS STILL HELD ON A SENSOR.
9 - MARK POINT/ POINT OF INTEREST	X	X	-	N/A	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE AT LEAST TWICE TO INDICATE A POINT OF INTEREST OR POTENTIAL TARGET OF OPPORTUNITY.

5.2-655

MIL-STD-6016B

Table J12-4.6. J12.6 Required Word Sequences, Message Priorities, and Periodic Update Rates for Status Information Discrete Environment/Category = 5, Land (Ground) (Sheet 2 of 2)

STATUS INFORMATION DISCRETE VALUE	J12.6 ¹ WORD SEQUENCE REQUIRED			PERIODIC UPDATE RATE (RRN)	STATUS INFORMATION DISCRETE VALUE DESCRIPTOR
	I	E0	C1		
10 - LOCK ON/ DESIGNATED GROUND TARGET (DGT)	X	X	2	7(6 SECS) ⁴	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE TO INDICATE A SENSOR ACQUISITION HAS BEEN OBTAINED ON THE SPECIFIED LAND (GROUND) TRACK/TARGET AND/OR THE TARGET IS THE DGT.
11 - BATTLE DAMAGE ASSESSMENT UNKNOWN	X	X	-	N/A	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE AT LEAST TWICE TO INDICATE THAT THE BATTLE DAMAGE IS UNKNOWN.
12 - RECOMMEND REATTACK	X	X	-	N/A	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE AT LEAST TWICE TO RECOMMEND THAT ANOTHER MISSION BE CONDUCTED AGAINST THE TARGET.
FOR NONC ² JU TO NONC ² JU ONLY					
13 - INVESTIGATE	X	X	X	N/A	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE TWICE TO A SPECIFIC ADDRESSEE TN. THE ADDRESSEE TN SHALL TRANSMIT STATUS INFORMATION DISCRETE VALUE = 2 WHEN THE ORDER HAS BEEN COMPLIED WITH.
14 - ENGAGE	X	X	X	N/A	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE TWICE TO A SPECIFIC ADDRESSEE TN. THE ADDRESSEE TN SHALL TRANSMIT STATUS INFORMATION DISCRETE VALUE = 1 WHEN THE ORDER HAS BEEN COMPLIED WITH.
15 - DISENGAGE	X	X	X	N/A	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE TWICE TO A SPECIFIC ADDRESSEE TN. THE ADDRESSEE TN SHALL CEASE TRANSMITTING STATUS INFORMATION DISCRETE VALUE = 1 OR 2 AND TRANSMIT STATUS INFORMATION DISCRETE VALUE = 7 WHEN THE ORDER HAS BEEN COMPLIED WITH.

NOTES

- ¹ See transmit rules.
- ² Must be transmitted if target strength greater than 1 is reported.
- ³ The use of SID value 4 for new sensor targets shall not be required, but is permitted, if the target begins in the lock on/DGT condition. In this circumstance, SID value 10, Lock On/DGT, may be used in the first message and SID value 4, New Sensor Target Report, need not be used.
- ⁴ A periodic update rate at an RRN of 8(3 seconds) shall be utilized for transmission on the NonC² JU-to-NonC² JU NPG.
- ⁵ Must be transmitted if reporting other than a geographic location pointer.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD TITLE: TARGET SORTING INITIAL WORD

49:	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29:	28	27	26	25
<---	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
LATITUDE, 0.0103 MINUTE										INDEX NUMBER														
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
20										6														

```

: 69 68 67 66 65 64 63 62 61 60 59 58 57 56 55 54 53 52 51 50
:
:
: LONGITUDE, 0.0103 MINUTE
:
:
: 21

```

WORD DESCRIPTION

WORD NUMBER: J12.6I
WORD TITLE: TARGET SORTING INITIAL WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	00
270 004	LABEL, J-SERIES	2-	6 5	01100
271 005	SUBLABEL, J-SERIES	7-	9 3	110
800 001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
704 021	STATUS INFORMATION DISCRETE	13-	16 4	
280 002	TARGET POSITION QUALITY (TPQ)	17-	18 2	
275 004	ENVIRONMENT/CATEGORY (ENV/CAT)	19-	21 3	
1864 001	ORIGIN OF INDEX NUMBER (ORG INX)	22	1	
768 002	INDEX NUMBER	23-	28 6	
281 017	LATITUDE, 0.0103 MINUTE	29-	48 20	
282 013	LONGITUDE, 0.0103 MINUTE	49-	69 21	

FIELD CODING FOR J12.6I

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
704	021	STATUS INFORMATION DISCRETE -----		PROVIDES TARGET SORTING INFORMATION.
		----- FOR ENV/CAT = 0, NO STATEMENT/UNKNOWN; ENV/ CAT = 1, SPACE; AND ENV/ CAT = 4, SUBSURFACE (MARITIME) -----		
		NO STATEMENT	0	
		UNDEFINED	1 THROUGH 15	
		----- FOR ENV/CAT = 2, AIR -----		
		NO STATEMENT	0	UPDATES TARGET/TRACK DATA.
		ENGAGING	1	THE SOURCE TN IS ENGAGING THE SPECIFIED AIR TRACK/TARGET.
		INVESTIGATING	2	THE SOURCE TN IS INVESTIGATING THE SPECIFIED AIR TRACK/TARGET.
		MISSILE IN FLIGHT/WEAPON RELEASED	3	THE SOURCE TN HAS LAUNCHED A MISSILE/RELEASED A WEAPON AGAINST THE SPECIFIED AIR TRACK/ TARGET.
		NEW SENSOR TARGET REPORT	4	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE AT LEAST ONCE TO INDICATE THIS REPORT IS A NEW SENSOR TARGET. SUBSEQUENT PERIODIC TRANSMISSIONS OF THE J12.6 MESSAGE WILL BE WITH THE APPLICABLE STATUS INFORMATION DISCRETE VALUE SET.
		CANCEL SENSOR TARGET REPORT	5	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE AT LEAST ONCE TO INDICATE IT IS NO LONGER REPORTING THE SPECIFIED TRACK/TARGET.
		TRACK/TARGET DESTROYED	6	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE TO INDICATE THE AIR TRACK/TARGET HAS BEEN DESTROYED AND IS NO LONGER A THREAT. THIS STATUS

5.2-660

MIL-STD-6016B

FIELD CODING FOR J12.6I

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
704	021	STATUS INFORMATION DISCRETE -----	(CONTINUED)	
		DISENGAGING	7	INFORMATION DISCRETE SHALL BE TRANSMITTED UNTIL SENSOR CONTACT IS CANCELLED/LOST. FOR A TARGET NOT HELD ON OWN SENSOR, THIS STATUS INFORMATION DISCRETE SHALL BE TRANSMITTED AT LEAST TWICE. THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE AT LEAST TWICE TO INDICATE A DISENGAGEMENT OF THE SPECIFIED AIR TRACK/TARGET. THE SOURCE TN SHALL THEN TRANSMIT THE APPROPRIATE STATUS INFORMATION DISCRETE VALUE.
		TARGET PARTIALLY DESTROYED	8	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE AT LEAST TWICE TO INDICATE THAT THE TARGET IS PARTIALLY DESTROYED. THE SOURCE TN SHALL THEN REVERT TO SID = 0 IF THE TARGET/TRACK IS STILL HELD ON A SENSOR.
		HEADS UP	9	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE TO ALERT OTHER UNITS THAT THE TARGET CONSTITUTES A THREAT TO FRIENDLY FORCES. THE SOURCE TN IS UNABLE TO ASSURE COMPLETE DESTRUCTION. THIS VALUE DOES NOT REPORT EITHER AN ENGAGEMENT OR THE BREAKING OF AN ENGAGEMENT.
		LOCK ON/PRIMARY DESIGNATED TARGET	10	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE TO INDICATE A SENSOR ACQUISITION HAS BEEN OBTAINED ON THE SPECIFIED AIR TRACK/TARGET AND/OR THE TARGET IS THE PDT.
		NOT EFFECTIVE	11	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE AT LEAST TWICE TO INDICATE A MISS OR ABORT ON THE SPECIFIED AIR TRACK/TARGET. THE SOURCE TN SHALL CONTINUE THE ENGAGEMENT.
		COVERING	12	THE SOURCE TN IS COVERING THE

5.2-661

MIL-STD-6016B

FIELD CODING FOR J12.6I

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
704	021	STATUS INFORMATION DISCRETE -----	(CONTINUED)	
		INVESTIGATE	13	SPECIFIED AIR TRACK/TARGET. THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE TWICE TO A SPECIFIC ADDRESSEE TN. THE ADDRESSEE TN SHALL TRANSMIT STATUS INFORMATION DISCRETE VALUE = 2 WHEN THE ORDER HAS BEEN COMPLIED WITH.
		ENGAGE	14	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE TWICE TO A SPECIFIC ADDRESSEE TN. THE ADDRESSEE TN SHALL TRANSMIT STATUS INFORMATION DISCRETE VALUE = 1 WHEN THE ORDER HAS BEEN COMPLIED WITH.
		DISENGAGE	15	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE TWICE TO A SPECIFIC ADDRESSEE TN. THE ADDRESSEE TN SHALL CEASE TRANSMITTING STATUS INFORMATION DISCRETE VALUE = 1 OR 2 AND TRANSMIT STATUS INFORMATION DISCRETE VALUE = 7 WHEN THE ORDER HAS BEEN COMPLIED WITH.
		----- FOR ENV/CAT = 3, SURFACE (MARITIME) -----		
		NO STATEMENT	0	UPDATES TARGET/TRACK DATA.
		ATTACKING	1	THE SOURCE TN IS ATTACKING THE SPECIFIED SURFACE (MARITIME) TRACK/TARGET.
		INVESTIGATING	2	THE SOURCE TN IS INVESTIGATING THE SPECIFIED SURFACE (MARITIME) TRACK/TARGET.
		MISSILE IN FLIGHT/WEAPON RELEASED	3	THE SOURCE TN HAS LAUNCHED A MISSILE/RELEASED A WEAPON AGAINST THE SPECIFIED SURFACE (MARITIME) TRACK/TARGET.
		NEW SENSOR TARGET REPORT	4	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE AT

5.2-662

MIL-STD-6016B

FIELD CODING FOR J12.6I

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

704	021	STATUS INFORMATION DISCRETE -----	(CONTINUED)	
-----	-----	--------------------------------------	-------------	--

		CANCEL SENSOR TARGET REPORT	5	
--	--	--------------------------------	---	--

		TRACK/TARGET DESTROYED	6	
--	--	------------------------	---	--

		DISENGAGING	7	
--	--	-------------	---	--

		TARGET PARTIALLY DESTROYED	8	
--	--	-------------------------------	---	--

		MARK POINT/POINT OF INTEREST	9	
--	--	---------------------------------	---	--

LEAST ONCE TO INDICATE THIS REPORT IS A NEW SENSOR TARGET. SUBSEQUENT PERIODIC TRANSMISSIONS OF THE J12.6 MESSAGE WILL BE WITH THE APPLICABLE STATUS INFORMATION DISCRETE VALUE SET.

THE SOURCE TN SHALL TRANSMIT THE STATUS INFORMATION DISCRETE AT LEAST ONCE TO INDICATE IT IS NO LONGER REPORTING THE SPECIFIED TRACK/TARGET.

THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE TO INDICATE THE SURFACE (MARITIME) TRACK/TARGET HAS BEEN DESTROYED AND IS NO LONGER A THREAT. THIS STATUS INFORMATION DISCRETE SHALL BE TRANSMITTED UNTIL SENSOR CONTACT IS CANCELLED/LOST. FOR A TARGET NOT HELD ON OWN SENSOR, THIS STATUS INFORMATION DISCRETE SHALL BE TRANSMITTED AT LEAST TWICE.

THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE AT LEAST TWICE TO INDICATE A DISENGAGEMENT OF THE SPECIFIED SURFACE (MARITIME) TRACK/TARGET. THE SOURCE TN SHALL THEN TRANSMIT THE APPROPRIATE STATUS INFORMATION DISCRETE VALUE.

THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE AT LEAST TWICE TO INDICATE THE TARGET IS PARTIALLY DESTROYED. THE SOURCE TN SHALL THEN REVERT TO SID = 0 IF THE TARGET/TRACK IS STILL HELD ON A SENSOR.

THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE AT LEAST TWICE TO INDICATE A POINT OF INTEREST OR POTENTIAL TARGET OF OPPORTUNITY.

5.2-663

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
704	021	STATUS INFORMATION DISCRETE	(CONTINUED)	

		LOCK ON/DESIGNATED SURFACE TARGET	10	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE TO INDICATE A SENSOR ACQUISITION HAS BEEN OBTAINED ON THE SPECIFIED SURFACE (MARITIME) TRACK/TARGET AND/OR THE TARGET IS THE DST.
		BATTLE DAMAGE ASSESSMENT UNKNOWN	11	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE AT LEAST TWICE TO INDICATE THAT THE BATTLE DAMAGE IS UNKNOWN.
		RECOMMEND REATTACK	12	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE AT LEAST TWICE TO RECOMMEND THAT ANOTHER MISSION BE CONDUCTED AGAINST THE TARGET.
		INVESTIGATE	13	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE TWICE TO A SPECIFIC ADDRESSEE TN. THE ADDRESSEE TN SHALL TRANSMIT STATUS INFORMATION DISCRETE VALUE = 2 WHEN THE ORDER HAS BEEN COMPLIED WITH.
		ENGAGE	14	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE TWICE TO A SPECIFIC ADDRESSEE TN. THE ADDRESSEE TN SHALL TRANSMIT STATUS INFORMATION DISCRETE VALUE = 1 WHEN THE ORDER HAS BEEN COMPLIED WITH.
		DISENGAGE	15	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE TWICE TO A SPECIFIC ADDRESSEE TN. THE ADDRESSEE TN SHALL CEASE TRANSMITTING STATUS INFORMATION DISCRETE VALUE = 1 OR 2 AND TRANSMIT STATUS INFORMATION DISCRETE VALUE = 7 WHEN THE ORDER HAS BEEN COMPLIED WITH.

		FOR ENV/CAT = 5, LAND (GROUND)		

5.2-664

MIL-STD-6016B

FIELD CODING FOR J12.6I

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
704	021	STATUS INFORMATION DISCRETE -----	(CONTINUED)	
		NO STATEMENT	0	UPDATES TARGET/TRACK DATA
		ATTACKING	1	THE SOURCE TN IS ATTACKING THE SPECIFIED LAND (GROUND) TRACK/TARGET.
		INVESTIGATING	2	THE SOURCE TN IS INVESTIGATING THE SPECIFIED LAND (GROUND) TRACK/TARGET.
		MISSILE IN FLIGHT/WEAPON RELEASED	3	THE SOURCE TN HAS LAUNCHED A MISSILE/RELEASED A WEAPON AGAINST THE SPECIFIED LAND GROUND TRACK/TARGET.
		NEW SENSOR TARGET REPORT	4	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE AT LEAST ONCE TO INDICATE THIS REPORT IS A NEW SENSOR TARGET. SUBSEQUENT PERIODIC TRANSMISSIONS OF THE J12.6 MESSAGE WILL BE WITH THE APPLICABLE STATUS INFORMATION DISCRETE VALUE SET.
		CANCEL SENSOR TARGET REPORT	5	THE SOURCE TN SHALL TRANSMIT THE STATUS INFORMATION DISCRETE AT LEAST ONCE TO INDICATE IT IS NO LONGER REPORTING THE SPECIFIED TRACK/TARGET.
		TRACK/TARGET DESTROYED	6	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE TO INDICATE THE LAND (GROUND) TRACK/TARGET HAS BEEN DESTROYED AND IS NO LONGER A THREAT. THIS STATUS INFORMATION DISCRETE SHALL BE TRANSMITTED UNTIL SENSOR CONTACT IS CANCELLED/LOST. FOR A TARGET NOT HELD ON OWN SENSOR, THIS STATUS INFORMATION DISCRETE SHALL BE TRANSMITTED AT LEAST TWICE.
		DISENGAGING	7	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE AT LEAST TWICE TO INDICATE A DISENGAGEMENT OF THE SPECIFIED LAND (GROUND) TRACK/TARGET. THE SOURCE TN SHALL THEN TRANSMIT THE APPROPRIATE STATUS INFORMATION

5.2-665

MIL-STD-6016B

FIELD CODING FOR J12.6I

(SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
704	021	STATUS INFORMATION DISCRETE -----	(CONTINUED)	
		TARGET PARTIALLY DESTROYED	8	DISCRETE VALUE. THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE AT LEAST TWICE TO INDICATE THE TARGET IS PARTIALLY DESTROYED. THE SOURCE TN SHALL THEN REVERT TO SID = 0 IF THE TARGET/TRACK IS STILL HELD ON A SENSOR.
		MARK POINT/POINT OF INTEREST	9	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE AT LEAST TWICE TO INDICATE A POINT OF INTEREST OR POTENTIAL TARGET OF OPPORTUNITY.
		LOCK ON/DESIGNATED SURFACE TARGET	10	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE TO INDICATE A SENSOR ACQUISITION HAS BEEN OBTAINED ON THE SPECIFIED LAND (GROUND) TRACK/TARGET AND/OR THE TARGET IS THE DGT.
		BATTLE DAMAGE ASSESSMENT UNKNOWN	11	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE AT LEAST TWICE TO INDICATE THAT THE BATTLE DAMAGE IS UNKNOWN.
		RECOMMEND REATTACK	12	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE AT LEAST TWICE TO RECOMMEND THAT ANOTHER MISSION BE CONDUCTED AGAINST THE TARGET.
		INVESTIGATE	13	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE TWICE TO A SPECIFIC ADDRESSEE TN. THE ADDRESSEE TN SHALL TRANSMIT STATUS INFORMATION DISCRETE VALUE = 2 WHEN THE ORDER HAS BEEN COMPLIED WITH.
		ENGAGE	14	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE TWICE TO A SPECIFIC ADDRESSEE TN. THE ADDRESSEE TN SHALL TRANSMIT STATUS INFORMATION DISCRETE VALUE = 1 WHEN THE ORDER HAS BEEN COMPLIED WITH.
		DISENGAGE	15	THE SOURCE TN SHALL TRANSMIT THIS

5.2-666

MIL-STD-6016B

FIELD CODING FOR J12.6I

(SHEET 8)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
704	021	STATUS INFORMATION DISCRETE -----	(CONTINUED)	STATUS INFORMATION DISCRETE TWICE TO A SPECIFIC ADDRESSEE TN. THE ADDRESSEE TN SHALL CEASE TRANSMITTING STATUS INFORMATION DISCRETE VALUE = 1 OR 2 AND TRANSMIT STATUS INFORMATION DISCRETE VALUE = 7 WHEN THE ORDER HAS BEEN COMPLIED WITH.
280	002	TARGET POSITION QUALITY -----		THE TARGET POSITION QUALITY IS STATED AS A NUMERICAL VALUE FROM 1 TO 3 WITH THE HIGHER VALUES INDICATING HIGHER RELIABILITY OF POSITIONAL ACCURACY OF TARGET LOCATION. THE RELIABILITY OF THE POSITIONAL INFORMATION IS EXPRESSED IN TERMS OF THE POSITIONAL ACCURACY ASSOCIATED WITH EACH PQ VALUE. THE POSITIONAL ACCURACY ASSOCIATED WITH EACH PQ VALUE IS DEFINED AS THE AREA (DM SQUARED) WITHIN WHICH THERE IS A .95 PROBABILITY THAT THE TARGET IS ACTUALLY LOCATED AT THE TIME OF THE REPORT.
		NO STATEMENT	0	
		EQUAL TO OR < 4.4 SQUARE DATA MILES.	1	
		EQUAL TO OR < 1.10 SQUARE DATA MILES	2	
		EQUAL TO OR < 0.0281 SQUARE DATA MILES	3	
275	004	ENVIRONMENT/CATEGORY -----		IDENTIFIES THE ENVIRONMENT/CATEGORY OF A JTIDS/MIDS UNIT OR TRACK.
		NO STATEMENT/UNKNOWN	0	
		SPACE	1	
		AIR	2	
		SURFACE (MARITIME)	3	
		SUBSURFACE (MARITIME)	4	
		LAND (GROUND)	5	
		UNDEFINED	6 THROUGH 7	

5.2-667

MIL-STD-6016B

FIELD CODING FOR J12.6I

(SHEET 9)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1864	001	ORIGIN OF INDEX NUMBER ----- MESSAGE ORIGINATOR'S INDEX NUMBER MESSAGE RECEIVER'S INDEX NUMBER	0 1	
768	002	INDEX NUMBER ----- NO STATEMENT NUMERIC	0 1 THROUGH 63	A VALUE ASSIGNED BY THE ORIGINATOR TO DIFFERENTIATE AMONG SENSOR TARGET REPORTS.
281	017	LATITUDE, 0.0103 MINUTE ----- 0 DEGREES +90/524,287 THROUGH +90 DEGREES NORTH NO STATEMENT -90 THROUGH -90/524,287 DEGREES SOUTH	0 1 THROUGH 524287 524288 524289 THROUGH 1048575	THE PRECISION IS APPROXIMATELY 63 FEET. IN 90/524,287 DEGREE INCREMENTS.
282	013	LONGITUDE, 0.0103 MINUTE ----- 0 DEGREES +180/1,048,575 THROUGH +180 DEGREES EAST NO STATEMENT -180 THROUGH -180/1,048,575 DEGREES WEST	0 1 THROUGH 1048575 1048576 1048577 THROUGH 2097151	THE PRECISION IS APPROXIMATELY 63 FEET. IN 180/1,048,575 DEGREE INCREMENTS.

5.2-668

MIL-STD-6016B

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD TITLE: TARGET SORTING EXTENSION WORD

<---

ALTITUDE, 100 FT

```
:SI
:TND
```

5.2-670

MIL-STD-6016B

WORD DESCRIPTION

WORD NUMBER: J12.6E0

WORD TITLE: TARGET SORTING EXTENSION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550 001		WORD FORMAT	0-	1 2	10
769 010		TRACK NUMBER, OBJECTIVE	2-	20 19	
1862 001		CORRELATION INDICATOR, TN/IN (CI TI)	21	1	
371 015		COURSE	22-	30 9	
367 018		SPEED	31-	41 11	
365 034		ALTITUDE, 100 FT	42-	52 11	
376 007		IDENTITY	53-	55 3	
376 001		IDENTITY AMPLIFYING DESCRIPTOR (ID AMP DESCR)	53-	55 3	
385 003		EXERCISE INDICATOR (EX IND)	56	1	
749 002		SPACE SPECIFIC TYPE	57-	68 12	
804 001		AIR SPECIFIC TYPE	57-	68 12	
808 001		SURFACE (MARITIME) SPECIFIC TYPE	57-	68 12	
809 001		SUBSURFACE (MARITIME) SPECIFIC TYPE	57-	68 12	
810 001		LAND (GROUND) SPECIFIC TYPE	57-	68 12	
756 012		SPARE	57-	68 12	
1861 001		SPECIAL INTEREST INDICATOR (SI IND)	69	1	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	010	TRACK NUMBER, OBJECTIVE -----		THE TN OF THE OBJECT OF THE ACTION DESCRIBED IN THE MESSAGE. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE-BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6
00111	7
01000	A
01001	B
01010	C
01011	D
01100	E
01101	F
01110	G
01111	H
10000	J

FIELD CODING FOR J12.6E0

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	010	TRACK NUMBER, OBJECTIVE -----	(CONTINUED)	
				10001 K
				10010 L
				10011 M
				10100 N
				10101 P
				10110 Q
				10111 R
				11000 S
				11001 T
				11010 U
				11011 V
				11100 W
				11101 X
				11110 Y
				11111 Z
		00000	0	NO STATEMENT.
		00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		00077	63	ILLEGAL.
		00100-00175	64 THROUGH 125	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		00176	126	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		00177	127	COLLECTIVE ADDRESS.
		00200-07776	128 THROUGH 4094	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		07777	4095	ILLEGAL.
		0A000-0Z777	4096 THROUGH 16383	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		10000-17777	16384 THROUGH 20479	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.

5.2-673

MIL-STD-6016B

FIELD CODING FOR J12.6E0

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	010	TRACK NUMBER, OBJECTIVE -----	(CONTINUED)	
		20000-27777	32768 THROUGH 36863	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION

5.2-674

MIL-STD-6016B

FIELD CODING FOR J12.6E0

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	010	TRACK NUMBER, OBJECTIVE -----	(CONTINUED)	
		70000-77776	114688 THROUGH 118782	REPORTING, E.G., TRACKS AND REFERENCE POINTS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
1862	001	CORRELATION INDICATOR, TN/IN -----		INDICATES WHETHER CORRELATION IS DONE BY THE C2 OR NONC2 UNIT.
		C2 DERIVED CORRELATION	0	CORRELATION BETWEEN TN AND IN HAS BEEN RECEIVED IN A J12.5 MESSAGE.
		NONC2 DERIVED CORRELATION	1	CORRELATION BETWEEN TN AND IN HAS BEEN DERIVED FROM NONC2 ONBOARD CORRELATION PROCESSING ONLY.
371	015	COURSE -----		INDICATES THE DIRECTION OF TRAVEL OF AN OBJECT IN DEGREES WITH RESPECT TO TRUE NORTH.
		0 THROUGH 359 DEGREES ILLEGAL NO STATEMENT	0 THROUGH 359 360 THROUGH 510 511	IN 1 DEGREE INCREMENTS.
367	018	SPEED -----		THE RATE OF CHANGE OF POSITION.
		0 THROUGH 4092 DATA MILES PER HOUR NO STATEMENT	0 THROUGH 2046 2047	EXPRESSES GROUND SPEED IN 2 DATA MILES PER HOUR INCREMENTS.
365	034	ALTITUDE, 100 FT -----		EXPRESSES ALTITUDE AS MEASURED OUT- WARD FROM THE EARTH AS A POSITIVE QUANTITY ABOVE MEAN SEA LEVEL (MSL) IN FEET.
		0 THROUGH 204,600 FT NO STATEMENT	0 THROUGH 2046 2047	IN 100 FT INCREMENTS.

5.2-675

MIL-STD-6016B

FIELD CODING FOR J12.6E0

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
376	007	IDENTITY -----		EXPRESSES THE STANDARD IDENTITY OF A TRACK.
		PENDING	0	A TRACK WHICH HAS NOT BEEN SUBJECTED TO THE IDENTIFICATION PROCESS.
		UNKNOWN	1	AN EVALUATED TRACK WHICH HAS NOT BEEN IDENTIFIED.
		ASSUMED FRIEND	2	A TRACK WHICH IS ASSUMED TO BE A FRIEND BECAUSE OF ITS CHARACTERISTICS, BEHAVIOR, OR ORIGIN.
		FRIEND	3	A TRACK BELONGING TO A DECLARED FRIENDLY NATION.
		NEUTRAL	4	A TRACK WHOSE CHARACTERISTICS, BEHAVIOR, ORIGIN, OR NATIONALITY INDICATE THAT IT IS NEITHER SUPPORTING NOR OPPOSING FRIENDLY FORCES.
		SUSPECT	5	A TRACK WHICH IS POTENTIALLY HOSTILE BECAUSE OF ITS CHARACTERISTICS, BEHAVIOR, ORIGIN, OR NATIONALITY.
		HOSTILE	6	A TRACK DECLARED TO BELONG TO ANY OPPOSING NATION, PARTY, GROUP, OR ENTITY, WHICH BY VIRTUE OF ITS BEHAVIOR OR INFORMATION COLLECTED ON IT SUCH AS CHARACTERISTICS, ORIGIN OR NATIONALITY CONTRIBUTES TO THE THREAT TO FRIENDLY FORCES.
		UNDEFINED	7	
376	001	IDENTITY AMPLIFYING DESCRIPTOR -----		A DESCRIPTOR ADDING TO THE STANDARD IDENTITY OF A TRACK INVOLVED IN AN EXERCISE. THE STANDARD IDENTITY IS FRIEND.
		EXERCISE PENDING	0	
		EXERCISE UNKNOWN	1	
		EXERCISE ASSUMED FRIEND	2	
		EXERCISE FRIEND	3	
		EXERCISE NEUTRAL	4	
		JOKER	5	
		FAKER	6	
		UNDEFINED	7	
385	003	EXERCISE INDICATOR -----		INDICATES WHETHER OR NOT THE MESSAGE IDENTIFIES AN EXERCISE TRACK.

5.2-676

MIL-STD-6016B

FIELD CODING FOR J12.6E0

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
385	003	EXERCISE INDICATOR -----	(CONTINUED)	
		NON-EXERCISE TRACK	0	
		EXERCISE TRACK OR UNIT	1	
749	002	SPACE SPECIFIC TYPE -----		THE SPECIFIC TYPE OF A POINT OR TRACK WITH AN ENVIRONMENT/CATEGORY OF SPACE.
		NO STATEMENT	0	
		FROG-7	1	
		HONEST JOHN	2	
		SAKR 80	3	
		SS-21 MOD 2	4	
		SS-21 MOD 3	5	
		HAFT-I	6	
		UNDEFINED	7 THROUGH 78	
		SHORT RANGE (0-65 DM)	79	
		ALACRAN	80	
		CHENG FENG	81	
		CONDOR	82	
		HAFT II	83	
		IRAN-130	84	
		LANCE	85	
		MB/EE-150	86	
		MB/EE-300	87	
		UNDEFINED	88	
		PRITHVI	89	
		SS-1B (SCUD-A)	90	
		SS-1C (SCUD-B)	91	
		SS-21 (SCARAB)	92	
		SS-300	93	
		B-610/CJS-98 (BG510)	94	
		NHK-I	95	
		NHK-II (HYON MU)	96	
		UNDEFINED	97 THROUGH 168	
		SHORT-MEDIUM RANGE (66-200 DM)	169	
		AL-HUSAYN	170	
		UNDEFINED	171	
		HAFT III	172	
		M-9	173	
		M-11	174	
		MB/EE-600	175	
		SCUD-C	176	
		SS-23 (SPIDER)	177	

5.2-677

MIL-STD-6016B

FIELD CODING FOR J12.6E0

(SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
749	002	SPACE SPECIFIC TYPE -----	(CONTINUED)	
		AL HUSSEIN	178	
		UNDEFINED	179 THROUGH 242	
		MEDIUM RANGE (201-400 DM)	243	
		AL-ABBAS	244	
		JERICH0-I	245	
		AL HIJARAN	246	
		SONDA IV	247	
		UNDEFINED	248 THROUGH 330	
		MEDIUM-EXTENDED RANGE (401-600 DM)	331	
		AL-FATAH	332	
		BADR-2000	333	
		CONDOR II	334	
		CSS-1	335	
		MB/EE-1000	336	
		SKY HORSE	337	
		SS-12A (SCALEBOARD A)	338	
		SS-12B (SCALEBOARD B)	339	
		SS1000	340	
		TIEN MA	341	
		UNDEFINED	342 THROUGH 416	
		EXTENDED RANGE (601-800 DM)	417	
		ARNISTON	418	
		CAPRICORNIO	419	
		JERICH0 II	420	
		NODONG-1	421	
		SS-N-5 (SERB)	422	
		UNDEFINED	423 THROUGH 496	
		EXTENDED-LONG RANGE (801-1000 DM)	497	
		AGNI	498	
		AL/ABED	499	
		CC-4 (SANDAL)	500	
		CSS-5	501	
		UNDEFINED	502 THROUGH 575	
		LONG RANGE (1001-1350 DM)	576	
		CHEVALINE	577	
		CSS-2	578	
		CSS-3	579	
		CSS-4	580	

5.2-678

MIL-STD-6016B

FIELD CODING FOR J12.6E0

(SHEET 8)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
749	002	SPACE SPECIFIC TYPE	(CONTINUED)	

		CSS-N-3	581	
		M-4 SLBM	582	
		M-5 SLBM	583	
		M-20 SLBM	584	
		MIDGETMAN	585	
		MINUTEMAN I	586	
		MINUTEMAN II	587	
		PEACEKEEPER	588	
		POLARIS A-3	589	
		POSEIDON C-3	590	
		SS-11 (SEGO)	591	
		SS-13 (SAVAGE)	592	
		SS-17 (SPANKER) MOD 1	593	
		SS-17 (SPANKER) MOD 2	594	
		SS-17 (SPANKER) MOD 3	595	
		SS-18 (SATAN) MOD 1	596	
		SS-18 (SATAN) MOD 2	597	
		SS-18 (SATAN) MOD 3	598	
		SS-20 (SABER)	599	
		SS-24 (SCALPEL)	600	
		SS-25 (SICKLE)	601	
		SS-N-6 (SAWFLY)	602	
		SS-N-8	603	
		SS-N-17 (SNIPE)	604	
		SS-N-18 (STINGRAY)	605	
		SS-N-20 (STURGEON)	606	
		SS-N-23 (SKIFF)	607	
		SSBS S-3	608	
		SSBS S-4	609	
		TRIDENT I (C-4)	610	
		TRIDENT II (D-5)	611	
		MODIFIED CSS-5	612	
		SS-19 MOD 3	613	
		UNDEFINED	614	
		NEW SOLID SLBM	615	
		CSS-NX-3	616	
		M4B	617	
		M45	618	
		UNDEFINED	619 THROUGH 786	
		>1350 DM	787	
		ABM-1B (GALOSH)	788	
		ARROW	789	
		ASTER	790	

5.2-679

MIL-STD-6016B

FIELD CODING FOR J12.6E0

(SHEET 9)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

749	002	SPACE SPECIFIC TYPE	(CONTINUED)	
-----	-----	---------------------	-------------	--

CORPS SAM	791
ERINT	792
HAWK	793
PATRIOT	794
SA-10 (GRUMBLE)	795
SA-12A (GLADIATOR)	796
SA-12B (GIANT)	797
SA-N-6 (GRUMBLE)	798
SH-08 (GAZELLE)	799
STANDARD MISSILE BLOCK	800
IVA	
THAAD	801
SM-2 BLOCK IV	802
SM-3 LEAP	803
UNDEFINED	804 THROUGH 876
INTERCEPTOR	877
OPERATIONAL COMMANDER	878 THROUGH 941
DEFINED 1-64	
UNDEFINED	942 THROUGH 1022
BALLISTIC MISSILE	1023
GENERAL	
UNDEFINED	1024 THROUGH 2046
SPACE GENERAL	2047
UNDEFINED	2048 THROUGH 4093
RESET TO NO STATEMENT	4094
UNDEFINED	4095

804	001	AIR SPECIFIC TYPE		
-----	-----	-------------------	--	--

NO STATEMENT	0

FIGHTER	

F-4 PHANTOM II	1
F-5 TIGER II	2
F-8 CRUSADER	3
F-14 TOMCAT	4
F-15 EAGLE	5
F-16 FIGHTING FALCON	6
F-101 VOODOO	7

THE SPECIFIC TYPE OF POINT OR TRACK WITH AN ENVIRONMENT/CATEGORY OF AIR.
--

5.2-680

MIL-STD-6016B

FIELD CODING FOR J12.6E0

(SHEET 10)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		F-104 STARFIGHTER	8	
		F-105 THUNDERCHIEF	9	
		F-106 DELTA DART	10	
		F-111 (GENERAL DYNAMICS)	11	
		F/A-18 HORNET	12	
		EFA	13	
		F-102	14	
		F-100	15	
		DISUSED	16	
		DISUSED	17	
		COMMANDO	18	
		DISUSED	19	
		DISUSED	20	
		J-35 DRAKEN	21	
		JAGUAR	22	
		SUPER ETENDARD	23	
		DISUSED	24 THROUGH 26	
		F-1 (MITSUBISHI)	27	
		F-35XD DRAKEN	28	
		DISUSED	29	
		HF-24 MARUT (WIND SPIRIT)	30	
		JA37 VIGGEN	31	
		DISUSED	32	
		SF-5 FREEDOM FIGHTER	33	
		IAR-91 ORAO	34	
		AJEET INVINCIBLE	35	
		KFIR C2	36	
		MIRAGE F1	37	
		MIRAGE 3	38	
		MIRAGE 5	39	
		MIRAGE 50	40	
		MIRAGE 2000	41	
		DISUSED	42	
		DISUSED	43	
		ALPHA JET	44	
		KEFIR	45	
		F-6 FARMER	46	
		F-8 FISHBED	47	
		F-9 FANTAN	48	
		F-12 (CHINA)	49	
		SU-7 FITTER	50	
		SU-9 FISHPOT	51	

5.2-681

MIL-STD-6016B

FIELD CODING FOR J12.6E0

(SHEET 11)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		SU-11 FLAGON	52	
		SU-15 FLAGON	53	
		SU-17 FITTER	54	
		SU-19 FENCER	55	
		SU-20 FITTER	56	
		SU-22 FITTER	57	
		SU-24 FENCER	58	
		SU-25 FROGFOOT	59	
		TU-28 FIDDLER	60	
		TU-128 FIDDLER	61	
		MIG-21 FISHBED	62	
		MIG-23 FLOGGER	63	
		MIG-25 FOXBAT	64	
		MIG-27 FLOGGER	65	
		YAK-28 FIREBAR	66	
		YAK-36 FORGER	67	
		AAF "RAM-J"	68	
		MIG-15 FAGOT	69	
		MIG-17 FRESCO	70	
		MIG-19 FARMER	71	
		SU-27 FLANKER	72	
		MIG-29 FULCRUM	73	
		MIG-31 FOXHOUND	74	
		YAK-38 FORGER-A	75	
		F-22 RAPTOR	76	
		F-84 THUNDERSTREAK	77	
		F-86 SABRE	78	
		F/A2 SEA HARRIER	79	
		IDF CHING-KUO (TAIWAN)	80	
		JAS-39 GRIPPEN	81	
		JIAN JI-7	82	
		JIAN JI-8-2	83	
		JOINT STRIKE FIGHTER	84	
		KFIR C7	85	
		KFIR 2000	86	
		RAFALE	87	
		SU-30	88	
		SU-33 (SU-27K)	89	
		SU-34	90	
		SU-35	91	
		SU-37	92	
		SU-39	93	
		YAK-141 FREESTYLE	94	

5.2-682

MIL-STD-6016B

FIELD CODING FOR J12.6E0

(SHEET 12)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		F-5 FRESCO	95	
		F-7 FISHBED	96	
		J-9	97	
		RT33	98	
		CF-188 HORNET	99	
		UNDEFINED	100	
		TORNADO F3	101	
		SEA HARRIER	102	
		F-5 NORTHROP	103	
		UNDEFINED	104 THROUGH 254	
		FIGHTER GENERAL	255	

		BOMBERS/ATTACK		

		A-4 SKYHAWK	256	
		A-6 INTRUDER	257	
		A-7 CORSAIR II	258	
		A-10 THUNDERBOLT II	259	
		A-37 DRAGONFLY	260	
		B-1 (ROCKWELL)	261	
		B-52 STRATOFORTRESS	262	
		AC-130 HERCULES	263	
		AV-8 HARRIER	264	
		F/A-18 HORNET	265	
		FB-111 (GENERAL DYNAMICS)	266	
		A-1	267	
		TA-28	268	
		DISUSED	269	
		AC-47	270	
		AC-119	271	
		AC-124	272	
		ALPHA JET	273	
		DISUSED	274 THROUGH 276	
		35XD DRAKEN	277	
		J-1 HAWK	278	
		J-1 JAESTREB	279	
		S-2	280	
		AJ37 VIGGEN	281	
		HA220 SUPER SAETA	282	
		M.B.326 (AERMACCHI)	283	

5.2-683

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		M.B.339 (AERMACCHI)	284	
		SF 260 WARRIER	285	
		SK 60 (SAAB)	286	
		BAC 167 STRIKEMASTER	287	
		TORNADO GR-1 (IDS)	288	
		IL-28 BEAGLE	289	
		MI-4 BISON	290	
		TU-16 BADGER	291	
		TU-22 BLINDER	292	
		TU-22M BACKFIRE	293	
		TU-95 BEAR	294	
		TU-142 BEAR	295	
		YAK-28 BREWER	296	
		SUPER ENTENDARD	297	
		TU-160 BLACKJACK	298	
		AMX	299	
		FRS1 SEA HARRIER	300	
		FRS2 SEA HARRIER	301	
		FRS51 SEA HARRIER	302	
		F-117 NIGHTHAWK	303	
		G4 SUPER GALEB	304	
		G91Y	305	
		HAWK-2000	306	
		HAWK-100	307	
		HAWK-200	308	
		HAWK-50	309	
		HAWK-60	310	
		IA-58 PUCARA	311	
		IAR-93 ORAO	312	
		IAR-99 SOIM	313	
		JIAN JI-5M	314	
		A-5 FANTAN	315	
		L59 ALBATROS	316	
		B-2 SPIRIT	317	
		B-7 HONGZHA	318	
		1050E	319	
		A3 LEI MING	320	
		HARRIER GR4/7	321	
		TORNADO GR4	322	
		AV-8B HARRIER PLUS	323	
		CF-188 HORNET	324	
		RAFALE	325	
		UNDEFINED	326 THROUGH 510	

FIELD CODING FOR J12.6E0

(SHEET 14)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		BOMBER/ATTACK GENERAL	511	

		PATROL/RECON/ELECTRONIC/ TANKER/GENERAL		

		E-2 HAWKEYE	512	
		E-3 SENTRY (AWACS)	513	
		E-4 NEACP	514	
		EA-3	515	
		EA-6 PROWLER	516	
		EB-57 (DOUGLAS)	517	
		EC-130 HERCULES	518	
		EC-135 (BOEING)	519	
		EF-4 WILD WEASEL	520	
		EF-111 (GENERAL DYNAMICS)	521	
		EP-3 ORION	522	
		KA-3 (DOUGLAS)	523	
		KA-6 (GRUMMAN)	524	
		KC-10 EXTENDER	525	
		KC-130 HERCULES	526	
		KC-135 STRATOTANKER	527	
		O-1 BIRD DOG	528	
		O-2 (CESSNA)	529	
		OV-1 MOHAWK	530	
		OV-10 BRONCO	531	
		P-2 NEPTUNE	532	
		P-3 ORION	533	
		RC-130 HERCULES	534	
		RC-135 (BOEING)	535	
		RF-4 PHANTOM II	536	
		RF-5 (NORTHROP)	537	
		RF-8 CRUSADER	538	
		RF-14 TOMCAT	539	
		RF-104 STARFIGHTER	540	
		RP-3 ORION	541	
		RU-21 UTE	542	
		S-2 TRACKER	543	
		S-3 VIKING	544	
		SR-71 BLACKBIRD	545	
		U-2 (LOCKHEED)	546	

5.2-685

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		U-4 AERO COMMANDER	547	
		U-5 H-500 TWIN	548	
		U-8 SEMINOLE	549	
		U-10 COURIER	550	
		UC-12 HURON	551	
		U-21 UTE	552	
		US-3 VIKING	553	
		OA-37 DRAGONFLY	554	
		TR-1	555	
		WC-130 HERCULES	556	
		E-1 TRACER	557	
		EB-66	558	
		EC-121	559	
		RA-3	560	
		SEA SCAN	561	
		FALCON 20 GUARDIAN	562	
		BR 1150 ATL1	563	
		RF-35XD DRAKEN	564	
		BN-2 MARITIME DEFENDER	565	
		DISUSED	566 THROUGH 567	
		CP-140 AURORA	568	
		HS.748 COASTGUARDER	569	
		HS.801 NIMROD	570	
		DISUSED	571	
		MK.3	572	
		RJ-1 HAWK	573	
		RJ-1 JAESTREB	574	
		SS-2	575	
		PEACE SENTINEL	576	
		KC-97	577	
		AU-24	578	
		AU-23	579	
		U-21	580	
		U-17	581	
		HU-16	582	
		U-9	583	
		U-3	584	
		RU-21	585	
		NKC-135	586	
		RF-101	587	
		RF-111	588	
		RB-57	589	
		RB-66	590	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		RC-121	591	
		BE-12 MAIL	592	
		IL-38 MAY	593	
		TU-126 MOSS	594	
		BE-6	595	
		VC-10 (TANKER)	596	
		AN-12 CUB-A (ELINT)	597	
		AN-12 CUB-C (EA)	598	
		AN-12 CUB-D (EA)	599	
		IL-20 COOT-A (ELINT)	600	
		IL-76 MAINSTAY	601	
		E-8 (J STARS)	602	
		TORNADO ECR	603	
		E-6 MERCURY	604	
		EMB-111	605	
		MU-2S	606	
		A40 ALBATROS	607	
		BE42 ALBATROS	608	
		CL215 AMPHIBIAN	609	
		IAI 1125	610	
		IL22 COOT B	611	
		J32 LANSEN	612	
		SH5 HARBIN	613	
		TIER1	614	
		TIER2	615	
		TIER3	616	
		US1 (SHIN)	617	
		C-212 CASA	618	
		CESSNA 550 CITATION II	619	
		CESSNA 560 CITATION V	620	
		CL 215 CANADAIR	621	
		DORNIER 27	622	
		F-27 FOKKER	623	
		NIMROD MRA4	624	
		CP-140A AURORA/ARCTURUS	625	
		RC-135 RIVET JOINT	626	
		ATL 2	627	
		ETENDARD IV P	628	
		ALIZE	629	
		FALCON 50	630	
		MIRAGE IV	631	
		MIRAGE 2000	632	
		BR 1150 GE ATL ASW	633	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		BR 1150 GE ATL SIGINT	634	
		C-130 HERCULES TANKER	635	
		ASTOR	636	
		UNDEFINED	637 THROUGH 761	
		TANKER	762	
		RECONNAISSANCE (RECON)	763	
		ELECTRONIC WARFARE (EW)	764	
		ASW	765	
		AEW AND C	766	
		MISCELLANEOUS GENERAL	767	

		TRAINER		

		T-2 BUCKEYE	768	
		T-28 TROJAN	769	
		T-29 (CONVAIR)	770	
		T-34 MENTOR	771	
		T-37 TWEET	772	
		T-38 TALON	773	
		T-39 SABERLINER	774	
		T-41 MESCALERO	775	
		T-42 CONCHISE	776	
		T-43 (BOEING)	777	
		T-44 KING AIR	778	
		TA-4 SKYHAWK	779	
		TA-7 CORSAIR II	780	
		T-33	781	
		ALPHA JET	782	
		B3LA (SAAB)	783	
		C-101 AVIOJET	784	
		G2-A GALEB	785	
		G2-A SEAGULL	786	
		L-29 DELFIN	787	
		L-29 MAYA	788	
		L-39 ALBATROS	789	
		L-70 MILTRAINER	790	
		L-450	791	
		P.55 (PARTENAVIA)	792	
		T-2 (MITSUBISHI)	793	
		CM 170 MAGISTER	794	
		M.B.339 (AERMACCHI)	795	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		T-2 (MITSUBISHI)	796	
		CM AU/ MAGISTER	797	
		M.B.339 (AERMACCHI)	798	
		SF-260 (SIAI-MARCHETTI)	799	
		SH 37 VIGGEN	800	
		QH-50 DRAKEN	801	
		SK 37 VIGGEN	802	
		SK 60 (SAAB)	803	
		TB30 EPSILON	804	
		TF-35XD	805	
		TJ-1 HAWK	806	
		TJ-1 JASTRAEB	807	
		TS.11 SPARK	808	
		AW1-2 FAN TRAINER	809	
		DISUSED	810	
		HJT-16 KIRAN	811	
		MBB223 FLAMINGO	812	
		SU-11 MAIDEN	813	
		SU-15	814	
		MIG-15 MIDGET	815	
		MIG-17	816	
		MIG-21 MONGOL	817	
		MIG-23	818	
		MIG-25	819	
		YAK-11 MOOSE	820	
		YAK-18 MAX	821	
		YAK-28 MAESTRO	822	
		TF-104 STARFIGHTER	823	
		T-46A	824	
		EMB-312 TOUCAN	825	
		T-45 GOSHAWK	826	
		T-47	827	
		AS202	828	
		CT114 TUTOR	829	
		G91T (FIAT JET 1)	830	
		K8 (NAMC)	831	
		L70 VINKA	832	
		STRIKEMASTER (BAE)	833	
		T1 JAYHAWK	834	
		T4 (KAWASAKI)	835	
		CT-142 DASH 8	836	
		B-55 BARON	837	
		F-33 BONANZA	838	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		839 PILLAN-TAMIZ	839	
		CT-133 SILVERSTAR	840	
		UNDEFINED	841 THROUGH 1022	
		TRAINER GENERAL	1023	

		TRANSPORT/AIRLINER		

		C-1 (GRUMMAN COD)	1024	
		C-2 GREYHOUND	1025	
		C-5 GALAXY	1026	
		C-7 CARIBOU	1027	
		C-9 NIGHTINGALE	1028	
		C-12 HURON	1029	
		C-123 PROVIDER	1030	
		C-130 HERCULES	1031	
		C-135 STRATOLIFTER	1032	
		C-140 JETSTAR	1033	
		C-141 STARLIFTER	1034	
		HC-130 HERCULES	1035	
		VC-6 KING AIR	1036	
		VC-9 SKYTRAIN II	1037	
		VC-11 GULFSTREAM	1038	
		VC-137 (BOEING)	1039	
		707 (BOEING)	1040	
		720 (BOEING)	1041	
		727 (BOEING)	1042	
		737 (BOEING)	1043	
		747 (BOEING)	1044	
		757 (BOEING)	1045	
		767 (BOEING)	1046	
		L-100 HERCULES	1047	
		L-1011 TRI STAR	1048	
		DC-8 (DOUGLAS)	1049	
		DC-9 (DOUGLAS)	1050	
		DC-10 (DOUGLAS)	1051	
		C-119	1052	
		DC-130	1053	
		HC-97	1054	
		C-JM	1055	
		C-54	1056	
		C-97	1057	

FIELD CODING FOR J12.6E0

(SHEET 20)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		C-118	1058	
		C-119	1059	
		C-121	1060	
		C-124	1061	
		C-131	1062	
		C-133	1063	
		VC-47	1064	
		CV-54	1065	
		CV-140	1066	
		ARAVA	1067	
		CONCORDE	1068	
		ISLANDER	1069	
		SKYVAN	1070	
		TRIDENT	1071	
		A300 AIRBUS	1072	
		A310 AIRBUS	1073	
		C-1 (KAWASKI)	1074	
		C-160 TRANSALL	1075	
		C.207 AZOR	1076	
		C-212 AVIOCAR	1077	
		F27 FRIENDSHIPS	1078	
		F28 FELLOWSHIP	1079	
		G222 SAMA	1080	
		AW.660 ARGOSY	1081	
		BAC111 ONE-ELEVEN	1082	
		DHC-5 BUFFALO	1083	
		DHC-7 DASH	1084	
		AN-2 COLT	1085	
		AN-10 CAT	1086	
		AN-12 CUB	1087	
		AN-14 CLOD	1088	
		AN-22 COCK	1089	
		AN-24 COKE	1090	
		AN-26 CURL	1091	
		AN-28 CASK	1092	
		AN-30 CLANK	1093	
		AN-32 CLINE	1094	
		AN-40 (VERY LARGE TURBO- PROP)	1095	
		AN-72 COALER	1096	
		IL-12 COACH	1097	
		IL-18 COOT	1098	
		IL-62 CLASSIC	1099	

FIELD CODING FOR J12.6E0

(SHEET 21)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		IL-76 CANDID	1100	
		IL-86 CAMBER	1101	
		TU-114 CLEAT	1102	
		TU-134 CRUSTY	1103	
		TU-144 CHARGER	1104	
		TU-154 CARELESS	1105	
		YAK-40 CODDLING	1106	
		YAK-42 CLOBBER	1107	
		TU-104	1108	
		YAK-27	1109	
		IL-38	1110	
		DISUSED	1111	
		DO-228 LT (TRANSPORT)	1112	
		DISUSED	1113	
		AN-74	1114	
		AN-124 CONDOR	1115	
		A320 AIRBUS	1116	
		A321 AIRBUS	1117	
		A330 AIRBUS	1118	
		A340 AIRBUS	1119	
		AN-70	1120	
		AN-225 COSSACK	1121	
		BAE-125-600	1122	
		BAE146	1123	
		777 (BOEING)	1124	
		C-17 GLOBEMASTER III	1125	
		C-20 GULFSTREAM 3/4	1126	
		C-21 LEARJET 35	1127	
		C-22	1128	
		C-23 SHERPA/SHORTS 330	1129	
		C-26 METRO 3	1130	
		YS 11 (NAMC)	1131	
		CL-600 CHALLENGER	1132	
		CL-601 CHALLENGER	1133	
		CN-235M (AIRTECH)	1134	
		EMB-120 BRASILLIA ADV	1135	
		EMB-145 AMAZON	1136	
		IL-78 MIDAS	1137	
		MD-11	1138	
		MD-80	1139	
		MD-90	1140	
		PD-808	1141	
		TU-44	1142	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		V-22 OSPREY	1143	
		VC-25	1144	
		XC-2	1145	
		1124 (IAI)	1146	
		1900 (BEECH)	1147	
		330 (SHORTS)	1148	
		580 (CONVAIR)	1149	
		ATR42	1150	
		B55 BARON	1151	
		BN2 ISLANDER	1152	
		C46 COMMANDO	1153	
		CARAVELL (SUD)	1154	
		CC109 (CANADAIR)	1155	
		CHALLENGER (CANADAIR)	1156	
		DHC2	1157	
		DHC6 TWIN OTTER	1158	
		DHC8	1159	
		EMB110 BANDEIRANTE	1160	
		EMB121	1161	
		FALCON 200/FALCON 20	1162	
		FALCON 50	1163	
		FALCON 900	1164	
		FH227 FRIENDSHIP	1165	
		FOKKER 100	1166	
		FOKKER 50	1167	
		FOKKER 60	1168	
		FOKKER 70	1169	
		GROB G850	1170	
		GULFSTREAM 1	1171	
		GULFSTREAM 2	1172	
		JETSTREAM	1173	
		JETSTREAM 31	1174	
		KING AIR	1175	
		L410 TURBOJET	1176	
		LEARJET 23	1177	
		LEARJET 24	1178	
		LEARJET 25 (IMPROVED VER	1179	
		28)		
		LEARJET 35/36	1180	
		LEARJET 55 (IMPROVED VER	1181	
		28)		
		LEARJET 60	1182	
		MERLIN 2	1183	

FIELD CODING FOR J12.6E0

(SHEET 23)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		MERLIN 3	1184	
		MERLIN 4	1185	
		METRO 3	1186	
		SAAB 2000	1187	
		SAAB 340	1188	
		SABRELINER	1189	
		U6 BEAVER	1190	
		VISCOUNT	1191	
		W3 SOKOL	1192	
		Y11 (HAMC)	1193	
		Y12 (HAMC)	1194	
		Y5	1195	
		CC-115 BUFFALO	1196	
		CC-130 HERCULES	1197	
		CC-150 POLARIS	1198	
		C-235 CASA	1199	
		CC-138 TWIN OTTER	1200	
		DO-228 LM (POLLUTION CONTROL)	1201	
		UNDEFINED	1202 THROUGH 1277	
		LIGHT CIVIL	1278	
		TRANSPORT/AIRLINER	1279	
		GENERAL		

		HELICOPTERS		

		AH-1 COBRA	1280	
		AH-64 APACHE	1281	
		CH-3 (SIKORSKY)	1282	
		CH-46 (SEA KNIGHT)	1283	
		CH-47 CHINOOK	1284	
		CH-53 SEA STALLION	1285	
		CH-54 LARKE (SKYCRANE)	1286	
		EH-60 QUICK FOX	1287	
		HH-1 IROQUOIS	1288	
		HH-2 SEA SPRITE	1289	
		HH-3 JOLLY GREEN	1290	
		HH-52 (SIKORSKY)	1291	
		HH-53 (SIKORSKY)	1292	
		OH-6 (HUGHES)	1293	
		OH-58 KIOWA	1294	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		RH-3 SEA KING	1295	
		RH-53 (SIKORSKY)	1296	
		SH-2 SEA SPRITE	1297	
		SH-3 SEA KING	1298	
		SH-60 SEA HAWK	1299	
		UH-1 IROQUOIS	1300	
		UH-2 SEA SPRITE	1301	
		UH-12 (HILLER)	1302	
		UH-46 (BOEING)	1303	
		UH-60 BLACK HAWK	1304	
		CH-2U	1305	
		HH-43	1306	
		A109 (AGUSTA)	1307	
		A129 MONGOOSE	1308	
		BO-105 (MBB)	1309	
		DISUSED	1310	
		CH-124 SEA KING	1311	
		DISUSED	1312	THROUGH 1314
		SA 315 LAMA	1315	
		DISUSED	1316	
		DISUSED	1317	
		SA 321 SUPER FRELON	1318	
		SA 330 PUMA	1319	
		SA 332 SUPER PUMA	1320	
		S 342 GAZELLE	1321	
		SA 350 ASTAR	1322	
		SA 360 DAUPHIN	1323	
		SA 361 DAUPHIN	1324	
		WG-13 LYNX	1325	
		WG-34 (WESTLAND)	1326	
		KA-18 HOG	1327	
		KA-20 HARP	1328	
		KA-25 HORMONE	1329	
		KA-26 HOODLUM	1330	
		MI-1 HARE	1331	
		MI-2 HOPLITE	1332	
		MI-4 HOUND	1333	
		MI-6 HOOK	1334	
		MI-8 HIP	1335	
		MI-10 HARKE	1336	
		MI-12 HOMER	1337	
		MI-14 HAZE	1338	
		MI-24 HIND	1339	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		MI-26 HALO	1340	
		CH-53E SUPER STALLION	1341	
		MH-53E SEA DRAGON	1342	
		HH-60 NIGHT HAWK	1343	
		HH-65A DOLPHIN	1344	
		KA-27 HELIX-A (ASW)	1345	
		KA-32 HELIX	1346	
		MI-17 HIP-H	1347	
		MI-28 HAVOC	1348	
		ECUREUIL/FENNEL/ESQILO	1349	
		KA-29 HELIX-B	1350	
		KA-50 HOKUM	1351	
		204 BELL	1352	
		205 BELL	1353	
		206 BELL	1354	
		214 BELL	1355	
		280 ENSTROM	1356	
		300 SCHWEIZER	1357	
		406 COMBAT SCOUT	1358	
		A 109 HIRUNDO	1359	
		A 129 MANGUSTA	1360	
		AH 6 CAYUSE	1361	
		ALOUETTE 2	1362	
		ALOUETTE 3	1363	
		AS 350 ECUREUIL	1364	
		AS 532 COUGAR	1365	
		AS 550 FENNEC	1366	
		AS 555 FENNEC	1367	
		AS 565 PANTHER	1368	
		CH 34 WESTLAND	1369	
		EH 101	1370	
		HAS 1 WASP	1371	
		KA-28 HELIX A	1372	
		MD 500 DEFENDER	1373	
		MI 22	1374	
		MI 25	1375	
		MI 35	1376	
		MI 9	1377	
		SA 341 GAZELLE	1378	
		SA 342 GAZELLE	1379	
		SA 365 DAUPHIN 2	1380	
		TS11 ISKRA	1381	
		WESSEX	1382	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		Z9 (HARBIN)	1383	
		CH-146 GRIFFON	1384	
		SEA KING AEW (SKW)	1385	
		EH 101 MERLIN	1386	
		AB-212 AUGUSTA BELL	1387	
		BO-105 BOLKOW	1388	
		CH-47 CHINOOK	1389	
		HUGHES 500	1390	
		HUGHES 3000	1391	
		SH-3D SIKORSKY	1392	
		SH-70L SIKORSKY	1393	
		CH-113 LABRADOR	1394	
		NH 90 (C2)	1395	
		NH 90 (RECCE)	1396	
		NH 90 (EW/SEAD)	1397	
		NH 90 (TRANSPORT)	1398	
		SEA LYNX MK88A	1399	
		SEA KING MK41 (KWS)	1400	
		TIGER (HAP)	1401	
		NH 90 (NAVY)	1402	
		TIGER (HAC)	1403	
		SA 341 GAZELLE CANON	1404	
		AS 532 COUGAR HORIZON	1405	
		AW-520 SAR CORMORANT	1406	
		UNDEFINED	1407 THROUGH 1534	
		HELICOPTER GENERAL	1535	

		AIR-AIR MISSILES		

		AIM-4A FALCON	1536	
		AIM-7 SPARROW	1537	
		AIM-9 SIDEWINDER	1538	
		AIM-54 PHOENIX	1539	
		AIM-2A GENIE	1540	
		AIM-120 AMRAAM	1541	
		ASLAM	1542	
		R.530	1543	
		R.550 MAGIC	1544	
		S.530 SUPER 530	1545	
		ASPIDER	1546	
		DISUSED	1547	

FIELD CODING FOR J12.6E0

(SHEET 27)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		SHAFRIR	1548	
		SKY FLASH	1549	
		DISUSED	1550	
		AA-2 ATOLL	1551	
		AA-3 ANAB	1552	
		AA-5 ASH	1553	
		AA-6 ACRID	1554	
		AA-7 APEX	1555	
		AA-8 APHID	1556	
		AAM	1557	
		AA-9 AMOS	1558	
		AA-XP-1/2	1559	
		AQM-34	1560	
		AQM-91	1561	
		BGM-34 FIREBEE/MQM34	1562	
		YQM-94	1563	
		YQM-98	1564	
		AIM-132 ASRAAM	1565	
		MICA	1566	
		PL-2A	1567	
		PL-5B	1568	
		PL-7	1569	
		PL-9	1570	
		PYTHON 3	1571	
		PYTHON 4	1572	
		AA-10 ALAMO	1573	
		AA-11 ARCHER	1574	
		AA-12 ADDER	1575	
		AA-1 ALKALI	1576	
		AAM-1	1577	
		UNDEFINED	1578 THROUGH 1790	
		AIR-TO-AIR MISSILE	1791	
		GENERAL		

		AIR-GROUND/GROUND-		
		GROUND MISSILES		

		AGM-45 SHRIKE	1792	
		AGM-65 MAVERICK	1793	
		AGM-69 SRAM	1794	
		AGM-78 STANDARD ARM	1795	

5.2-698

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		AGM-84 HARPOON	1796	
		AGM-86 ALCM	1797	
		AGM-88 HARM	1798	
		AGM-109 TOMAHAWK	1799	
		AM 39 EXOCET	1800	
		AGM-119 PENGUIN	1801	
		AS 11 KILTER	1802	
		AS 12 KEGLER	1803	
		AS 15 KENT	1804	
		AS 30	1805	
		DISUSED	1806	
		RB 05	1807	
		RB 08	1808	
		ADVANCED ASM	1809	
		AS-1 KENNEL	1810	
		AS-2 KIPPER	1811	
		AS-3 KANGAROO	1812	
		AS-4 KITCHEN	1813	
		AS-5 KELT	1814	
		AS-6 KINGFISH	1815	
		AS-7 KERRY	1816	
		DISUSED	1817	
		AS-10 KAREN	1818	
		AS-9 KYLE	1819	
		AS 34 KORMORAN	1820	
		ASM GABRIEL	1821	
		ASM SEA SKUA	1822	
		ASM SEA EAGLE	1823	
		ASMP	1824	
		AT-2 SWATTER	1825	
		AT-3 SAGGER	1826	
		AT-6 SPIRAL	1827	
		C-601	1828	
		C-611	1829	
		C-801	1830	
		C-802	1831	
		CSS-2	1832	
		CSS-3	1833	
		CSS-N-3	1834	
		CSS-X-4	1835	
		FL-2 SILKWORM	1836	
		FL-7	1837	
		HY-2	1838	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		HY-3	1839	
		M-9/11	1840	
		WS-1	1841	
		AS-13 KINGBOLT	1842	
		AS-14 KEDGE	1843	
		AS-16 KICKBACK	1844	
		AS-17 KRYPTON	1845	
		AS-18 KAZOO	1846	
		AT-4 SPIGOT	1847	
		AT-5 SPANDREL	1848	
		AT-7 SAXHORN	1849	
		AT-10 STABBER	1850	
		AT-11 SNIPER	1851	
		AT-12	1852	
		AT-13	1853	
		AT-14	1854	
		FROG-7	1855	
		SS-1 SCUD	1856	
		SS-11 SEGO	1857	
		SS-13 SAVAGE	1858	
		SS-18 SATAN	1859	
		SS-19 STILETTO	1860	
		SS-24 SCALPEL	1861	
		SS-25 SICKLE	1862	
		SS-N-2 STYX	1863	
		SS-N-3 SHADDOCK	1864	
		SS-N-6 SERB	1865	
		SS-N-7 STARBRIGHT	1866	
		SS-N-8 SAWFLY	1867	
		SS-N-9 SIREN	1868	
		SS-N-12 SANDBOX	1869	
		SS-N-18 STINGRAY	1870	
		SS-N-19 SHIPWRECK	1871	
		SS-N-20 STURGEON	1872	
		SS-N-21 SAMPSON	1873	
		SS-N-22 SUNBURN	1874	
		SS-N-23 SKIFF	1875	
		SS-N-26	1876	
		AGNI	1877	
		PRITHVI	1878	
		TOW	1879	
		AGM-114 HELLFIRE	1880	
		MLRS	1881	

FIELD CODING FOR J12.6E0

(SHEET 30)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		HOT	1882	
		MILAN	1883	
		TRIGAT	1884	
		OTOMAT	1885	
		RBS-15M	1886	
		ARMAT	1887	
		ALARM	1888	
		AGM-12 BULLPUP	1889	
		AGM-62A WALLEYE	1890	
		AGM-123A SKIPPER II	1891	
		APACHE (ASM)	1892	
		AS 8	1893	
		AT-1 SWATTER	1894	
		CAS1	1895	
		KH-41 MOSKIT	1896	
		MARTIN PESCADOR	1897	
		MAS1 CARCARA	1898	
		RB 04E	1899	
		STAR	1900	
		SEA INDIGO	1901	
		MM 38	1902	
		MM 40	1903	
		SM 39	1904	
		AS 34 KORMORAN II	1905	
		UNDEFINED	1906 THROUGH 2046	
		AIR-GROUND MISSILE	2047	
		GENERAL		

		SURFACE TO AIR MISSILES		

		FIM-92 STINGER	2048	
		NIM-23 HAWK	2049	
		MIM-42 REDEYE	2050	
		MIM-72 CHAPARRAL	2051	
		MIM-104 PATRIOT	2052	
		RIM-2 TERRIER	2053	
		RIM-7 SEA SPARROW	2054	
		RIM-8 TALOS	2055	
		RIM-24 TARTAR	2056	
		RIM-66 STANDARD MISSILE	2057	
		RIM-67 STANDARD MISSILE	2058	

FIELD CODING FOR J12.6E0

(SHEET 31)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		BLOWPIPE	2059	
		DISUSED	2060	THROUGH 2061
		SEA DART	2062	
		DISUSED	2063	
		SEA WOLF	2064	
		S 440 CROTALE EDIR	2065	
		RAPIER	2066	
		RBS-70 (SLM)	2067	
		DISUSED	2068	
		SAM ROLAND	2069	
		SA-2 GUIDELINE	2070	
		SA-3 GOA	2071	
		SA-4 GANEF	2072	
		SA-N-3 GOBLET	2073	
		SA-5 GAMMON	2074	
		SA-N-4 GECKO	2075	
		SA-6 GAINFUL	2076	
		SA-N-6 GRUMBLE	2077	
		SA-7 GRAIL	2078	
		SA-8 GECKO	2079	
		SA-9 GASKIN	2080	
		SA-10 GRUMBLE	2081	
		SA-11 GADFLY	2082	
		SA-12	2083	
		SA-13 GOPHER	2084	
		MISTRAL	2085	
		SA-N-7 GADFLY	2086	
		SA-N-8 GREMLIN	2087	
		SA-14 GREMLIN	2088	
		SA-16 GIMLET	2089	
		SA-X-17	2090	
		SA-N-5 GRAIL	2091	
		SA-N-11 GRISOM	2092	
		SA-12A GLADIATOR	2093	
		SA-12B GIANT	2094	
		SA-14 GREMLIN	2095	
		SA-15 GAUNTLET	2096	
		SA-17 GRIZZLY	2097	
		SA-N-12 GRIZZLY	2098	
		SA-18 GROUSE	2099	
		SA-19 GRISOM	2100	
		RIM-116 RAM	2101	
		ADATS	2102	

FIELD CODING FOR J12.6E0

(SHEET 32)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		JAVELIN	2103	
		STARBURST	2104	
		STARSTREAK	2105	
		ASPIDE	2106	
		I-HAWK	2107	
		ROLAND II	2108	
		SM-2 BLOCK II	2109	
		SM-2 BLOCK III	2110	
		SM-2 BLOCK IIIA	2111	
		SM-2 BLOCK IIIB	2112	
		SM-2 BLOCK IV	2113	
		SM-2 BLOCK IVA	2114	
		SM-3 LEAP	2115	
		AKASH	2116	
		ANZA	2117	
		ANZA II	2118	
		CSA-1	2119	
		CSA-2	2120	
		CSA-4	2121	
		CSA-5	2122	
		FM-80	2123	
		HN-5	2124	
		NK-7	2125	
		NK-16	2126	
		PANTZYR	2127	
		RAPIER 2000/JERNAS	2128	
		RBS-90	2129	
		SAKR	2130	
		SAVA	2131	
		SHANINE	2132	
		SKYGUARD ASPIDE	2133	
		SPADA	2134	
		TAM SAM	2135	
		TIGERCAT	2136	
		VANGUARD	2137	
		SA-N-1 GOA	2138	
		SA-N-9 GAUNTLET	2139	
		SA-N-10	2140	
		ALBATROS/ASPIDE	2141	
		SM-1	2142	
		VT1 CROTALE	2143	
		MASURCA	2144	
		ASTER 15	2145	

FIELD CODING FOR J12.6E0 (SHEET 33)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE -----	(CONTINUED)	
		ASTER 30	2146	
		UNDEFINED	2147 THROUGH 4093	
		RESET TO NO STATEMENT	4094	
		SURFACE-TO-AIR MISSILE	4095	
		GENERAL		
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----		THE SPECIFIC TYPE OF POINT OR TRACK WITH AN ENVIRONMENT/CATEGORY OF SURFACE (MARITIME).
		NO STATEMENT	0	
		CV GENERAL	1	
		CLEMENCEAU	2	
		ENTERPRISE	3	
		FORRESTAL	4	
		JOHN F KENNEDY	5	
		KITTY HAWK	6	
		MIDWAY	7	
		NIMITZ	8	
		CHARLES DE GAULLE	9	
		UNDEFINED	10 THROUGH 21	
		CVS GENERAL	22	
		DEDALO	23	
		MINAS GERAIS	24	
		VIKRANT	25	
		VEINTICINCO DE MAYO	26	
		VIRAAT	27	
		UNDEFINED	28 THROUGH 35	
		CVH GENERAL	36	
		GIUSEPPE GARIBALDI	37	
		INVINCIBLE	38	
		JEANNE D'ARC	39	
		KIEV	40	
		PRINCIPE DE ASTURIAS	41	
		UNDEFINED	42	
		KIEV (MODIFIED)	43	
		UNDEFINED	44 THROUGH 52	
		BB GENERAL	53	
		IOWA	54	
		UNDEFINED	55 THROUGH 64	
		CC GENERAL	65	
		SVERDLOV (MODIFIED)	66	
		UNDEFINED	67 THROUGH 76	
		CG GENERAL	77	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		ANDREA DORIA	78	
		BAINBRIDGE	79	
		BELKNAP	80	
		CALIFORNIA	81	
		UNDEFINED	82	
		KARA	83	
		KIROV	84	
		KRESTA I	85	
		KRESTA II	86	
		KYNDA	87	
		LEAHY	88	
		LONG BEACH	89	
		SLAVA	90	
		TICONDEROGA	91	
		TRUXTUN	92	
		VIRGINIA	93	
		VITTORIO VENETO	94	
		UNDEFINED	95 THROUGH 118	
		CH GENERAL	119	
		MOSKVA	120	
		UNDEFINED	121 THROUGH 130	
		CA GENERAL	131	
		UNDEFINED	132	
		SVERDLOV	133	
		UNDEFINED	134 THROUGH 143	
		DD GENERAL	144	
		AKIZUKI	145	
		ALLEN M SUMNER	146	
		ALLEN M SUMNER FRAM II	147	
		ALMIRANTE	148	
		AMATSUKAZE	149	
		ANIMOSO	150	
		ANSHAN	151	
		ARLEIGH BURKE	152	
		ASAGARI	153	
		UNDEFINED	154	
		AUDACE	155	
		AYANAMI	156	
		DISUSED	157	
		CARPENTER FRAM I	158	
		CHARLES F ADAMS (MOD)	159	
		CHARLES F ADAMS	160	

FIELD CODING FOR J12.6E0

(SHEET 35)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		COONTZ	161	
		DISUSED	162 THROUGH 163	
		UNDEFINED	164	
		FLETCHER	165	
		FORREST SHERMAN (MOD) & HULL	166	
		FRIESLAND	167	
		GEARING FRAM I	168	
		GEARING FRAM II	169	
		UNDEFINED	170	
		DISUSED	171	
		HARUNA	172	
		HATAKAZE	173	
		HATSUYUKI	174	
		IMPAVIDO	175	
		KANIN	176	
		KASHIN (MODIFIED)	177	
		KASHIN	178	
		KASHIN II	179	
		KIDD	180	
		UNDEFINED	181	
		KILDIN (MODIFIED)	182	
		KOTLIN	183	
		KOTLIN (MODIFIED)	184	
		LUDA (TYPE 051)	185	
		MEKO 360	186	
		MINEGUMO	187	
		PROJECT 15	188	
		ROBERT H SMITH	189	
		ROGER D LAURIA	190	
		SAM KOTLIN	191	
		SHIRANE	192	
		SKORY	193	
		SOVREMENYYY	194	
		SPRUANCE	195	
		SUFFREN	196	
		TACHIKAZE	197	
		TAKATSUKI	198	
		TYPE 42	199	
		DISUSED	200	
		DISUSED	201	
		TYPE F-70 (AAW)	202	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		TYPE F-70 (ASW)	203	
		TYPE F-67	204	
		UNDEFINED	205 THROUGH 206	
		TYPE T-53 (MODIFIED-ASW)	207	
		UNDEFINED	208	
		UDALOY	209	
		YAMAGUMO	210	
		Z	211	
		IROQUOIS	212	
		UNDEFINED	213 THROUGH 276	
		DE GENERAL	277	
		UNDEFINED	278	
		CASTLE	279	
		UNDEFINED	280 THROUGH 295	
		FF GENERAL	296	
		ALMIRANTE CLEMENTE	297	
		ALMIRANTE PEREIRA DA SILVA	298	
		ALPINO	299	
		DISUSED	300 THROUGH 301	
		BALEARES	302	
		BAPTISTA DE ANDRADE	303	
		UNDEFINED	304	
		BERK	305	
		BLACK SWAN	306	
		BROADSWORD (TYPE 22)	307	
		BRONSTEIN	308	
		BROOKE	309	
		CANNON	310	
		CHARLES LAWRENCE	311	
		CHENGDU	312	
		CHIKUGO	313	
		COMANDANTE JOAO BELO	314	
		UNDEFINED	315	
		CROSLEY	316	
		DEALEY	317	
		DESCUBIERTA	318	
		DUKE (TYPE 23)	319	
		DURANGO	320	
		EDSALL	321	
		GARCIA	322	
		GLOVER	323	

FIELD CODING FOR J12.6E0

(SHEET 37)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		GODAVARI	324	
		GRISHA I	325	
		GRISHA II	326	
		GRISHA III	327	
		UNDEFINED	328	
		GRISHA V	329	
		UNDEFINED	330	
		HVIDBJORNEN	331	
		ISHKARI	332	
		ISUZU	333	
		JACOB VAN HEEMSKERCK	334	
		JIANGDONG (TYPE 053J)	335	
		JIANGHU (TYPE 053H)	336	
		JIANGNAN	337	
		JOAO COUTINHO	338	
		KAREL DOORMAN	339	
		KNOX	340	
		DISUSED	341	
		KONI	342	
		KORTENAER	343	
		KRIVAK I	344	
		KRIVAK II	345	
		KRIVAK III	346	
		LA FAYETTE	347	
		DISUSED	348	
		LEOPARD	349	
		LUPU	350	
		M	351	
		DISUSED	352	
		MAESTRALE	353	
		MEKO 140 TYPE	354	
		MEKO 200 TYPE	355	
		MIRKA I	356	
		MIRKA II	357	
		NIELS JUEL	358	
		NITEROI	359	
		OLIVER HAZARD PERRY	360	
		OSLO	361	
		PEDER SKRAM	362	
		PETYA I (MODIFIED)	363	
		PETYA I	364	
		PETYA II (MODIFIED)	365	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		PETYA II	366	
		PETYA III	367	
		UNDEFINED	368	
		DISUSED	369	
		RIGA	370	
		RIVER	371	
		BRANDENBURG (TYPE 123)	372	
		RUDDEROW	373	
		SACHSEN (TYPE 124)	374	
		SAVAGE	375	
		DISUSED	376	
		TROMP	377	
		TYPE A 69	378	
		TYPE F-2000S	379	
		UNDEFINED	380	THROUGH 381
		YUBARI	382	
		BREMEN (TYPE 122)	383	
		CLAUDE JONES	384	
		FFG 7	385	
		HALIFAX	386	
		NAJIN	387	
		PRESIDENT	388	
		SANTA MARIA	389	
		VOSPER MK 5	390	
		VOSPERTHORNYCROFT MK 7	391	
		WIELINGEN	392	
		FLOREAL	393	
		COMMANDANT BORY	394	
		UNDEFINED	395	THROUGH 478
		FS GENERAL	479	
		ALBATROS	480	
		AUK CLASS	481	
		DE CRISTOFARO	482	
		DISUSED	483	
		MINERVA	484	
		NANUCHKA I	485	
		NANUCHKA II	486	
		NANUCHKA III	487	
		DISUSED	488	
		PF-103	489	
		SAAR 5	490	
		SLEIPNER	491	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		TARANTUL I	492	
		TARANTUL II	493	
		DISUSED	494	
		WADI	495	
		UNDEFINED	496 THROUGH 517	
		LL GENERAL	518	
		UNDEFINED	519 THROUGH 528	
		LCC GENERAL	529	
		BLUE RIDGE	530	
		CAVEZZALE	531	
		UNDEFINED	532 THROUGH 540	
		LKA GENERAL	541	
		CHARLESTON	542	
		UNDEFINED	543 THROUGH 552	
		LFS GENERAL	553	
		UNDEFINED	554 THROUGH 563	
		LHA GENERAL	564	
		TARAWA	565	
		UNDEFINED	566 THROUGH 575	
		LHD GENERAL	576	
		WASP	577	
		UNDEFINED	578 THROUGH 587	
		LPA GENERAL	588	
		UNDEFINED	589 THROUGH 598	
		LPD GENERAL	599	
		AUSTIN	600	
		FEARLESS	601	
		IVAN ROGOV	602	
		UNDEFINED	603	
		RALEIGH	604	
		SAN GIORGIO	605	
		UNDEFINED	606 THROUGH 615	
		LPH GENERAL	616	
		IWO JIMA	617	
		UNDEFINED	618 THROUGH 627	
		LSD GENERAL	628	
		ANCHORAGE	629	
		ASHLAND	630	
		CABILDO	631	
		OURAGAN	632	
		FOUDRE	633	
		THOMASTON	634	

FIELD CODING FOR J12.6E0

(SHEET 40)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		WHIDBEY ISLAND	635	
		UNDEFINED	636 THROUGH 646	
		LSL GENERAL	647	
		SIR GERAINT	648	
		UNDEFINED	649 THROUGH 657	
		LSM GENERAL	658	
		ASHDOD	659	
		BATRAL	660	
		CAKABEY	661	
		EDIC I	662	
		EDIC II	663	
		LSM-1	664	
		MP-4	665	
		POLNOCHNY	666	
		POLOCHNY A	667	
		POLOCHNY B	668	
		POLOCHNY C	669	
		POLOCHNY D	670	
		YUDAO	671	
		YULIMG	672	
		BOUGAINVILLE	673	
		UNDEFINED	674 THROUGH 687	
		LST GENERAL	688	
		ALLIGATOR	689	
		ATSUMI	690	
		UNDEFINED	691	
		BROOKE MARINE 93M	692	
		CAKABEY NL-122	693	
		CNIM PS 700	694	
		DE SOTO COUNTY	695	
		DISUSED	696	
		HENGAM	697	
		LST 1-510	698	
		LST 511-1152	699	
		MIURA	700	
		NEWPORT	701	
		ROPUCHA	702	
		SARUCABEY	703	
		CNGF	704	
		OCEAN	705	
		ALBION	706	
		TERREBONNE PARISH	707	

FIELD CODING FOR J12.6E0

(SHEET 41)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		TOBRUK	708	
		UNDEFINED	709	
		YUKAN	710	
		UNDEFINED	711 THROUGH 730	
		LSV GENERAL	731	
		UNDEFINED	732 THROUGH 741	
		LC GENERAL	742	
		UNDEFINED	743 THROUGH 751	
		LCM GENERAL	752	
		CTM 1	753	
		HUNGNAM	754	
		LCM 1057/1058	755	
		LCM 6	756	
		LCM 8	757	
		T-4	758	
		TSAPLYA	759	
		LCM (TYPE 521)	760	
		UNDEFINED	761 THROUGH 772	
		LCP GENERAL	773	
		DISUSED	774	
		LCM 1031	775	
		LCM 1035/1036	776	
		LCM 1055/1056	777	
		NAMPO	778	
		UNDEFINED	779 THROUGH 788	
		LCPL GENERAL	789	
		UNDEFINED	790 THROUGH 799	
		LWC GENERAL	800	
		UNDEFINED	801 THROUGH 810	
		LCU GENERAL	811	
		BALIKPAPAN	812	
		BOMBARDA	813	
		BRAILA	814	
		LCU (TYPE 520)	815	
		DISUSED	816	
		DISUSED	817	
		DISUSED	818	
		DSM-501	819	
		HANCHON	820	
		HANTAE	821	
		KISHON	822	
		KVALSUND	823	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		LCT MK 5	824	
		LCT MK 6	825	
		LCU 501	826	
		MFP D-3	827	
		MZ	828	
		REINOYSUND	829	
		SMB-1	830	
		TU 57-M	831	
		US LCU 1466	832	
		VYDRA	833	
		YURA	834	
		UNDEFINED	835 THROUGH 866	
		LCVP GENERAL	867	
		UNDEFINED	868 THROUGH 877	
		LCAC GENERAL	878	
		AIST	879	
		GUS	880	
		LEBED	881	
		UTENOK	882	
		WELLINGTON BH-7 MK 4	883	
		WELLINGTON BH-7 MK 5	884	
		WINCHESTER (SR.N6)	885	
		UNDEFINED	886 THROUGH 896	
		MM GENERAL	897	
		ALESHA	898	
		ALVSBORG	899	
		BORGEN	900	
		CARLSKRONA	901	
		COSAR	902	
		FALSTER	903	
		FURUSUND (MUL-20)	904	
		LANGELAND	905	
		LINDORMEN	906	
		LSM-1 (MODIFIED)	907	
		MUL-11	908	
		MUL-12	909	
		DISUSED	910	
		SMITH	911	
		US YMP	912	
		VIDAR	913	
		UNDEFINED	914 THROUGH 935	
		MCS GENERAL	936	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		UNDEFINED	937 THROUGH 946	
		MCJ GENERAL	947	
		UNDEFINED	948 THROUGH 957	
		MCD GENERAL	958	
		KINGSTON	959	
		MUEHLHAUSEN MCD (TYPE 742A)	960	
		UNDEFINED	961 THROUGH 968	
		MCM GENERAL	969	
		UNDEFINED	970 THROUGH 979	
		MH GENERAL	980	
		UNDEFINED	981 THROUGH 990	
		MHO GENERAL	991	
		UNDEFINED	992 THROUGH 1001	
		MHC GENERAL	1002	
		ADJUTANT (MODIFIED)	1003	
		AGGRESSIVE	1004	
		CIRCE	1005	
		WEIDEN MHC (TYPE 332)	1006	
		KOBLENZ MHC (TYPE 331B)	1007	
		HAM	1008	
		HUNT	1009	
		LANDSORT	1010	
		LERICI	1011	
		MSC 50	1012	
		MSO 218	1013	
		MSO 503	1014	
		SAUDA	1015	
		SIRIUS	1016	
		DISUSED	1017	
		TRIPARTITE	1018	
		VANYA I	1019	
		SANDOWN (SRMH)	1020	
		UNDEFINED	1021 THROUGH 1029	
		MHSC GENERAL	1030	
		MARS	1031	
		UNDEFINED	1032 THROUGH 1043	
		MHI GENERAL	1044	
		BAY	1045	
		UNDEFINED	1046 THROUGH 1054	
		MHA GENERAL	1055	
		UNDEFINED	1056 THROUGH 1065	

FIELD CODING FOR J12.6E0

(SHEET 44)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		ML GENERAL	1066	
		UNDEFINED	1067 THROUGH 1076	
		MLC GENERAL	1077	
		CURLEW	1078	
		UNDEFINED	1079 THROUGH 1088	
		MLI GENERAL	1089	
		UNDEFINED	1090 THROUGH 1099	
		MLO GENERAL	1100	
		UNDEFINED	1101 THROUGH 1110	
		MLR GENERAL	1111	
		UNDEFINED	1112 THROUGH 1121	
		MLA GENERAL	1122	
		UNDEFINED	1123 THROUGH 1132	
		MLS GENERAL	1133	
		UNDEFINED	1134 THROUGH 1143	
		MS GENERAL	1144	
		UNDEFINED	1145 THROUGH 1154	
		MSF GENERAL	1155	
		EX-ERIMO	1156	
		K-8	1157	
		KROGULEC	1158	
		M-40	1159	
		MSO-421	1160	
		NATYA I	1161	
		NATYA II	1162	
		RIVER	1163	
		T-43	1164	
		YURKA	1165	
		UNDEFINED	1166 THROUGH 1180	
		MSO GENERAL	1181	
		ACME	1182	
		AGGRESSIVE	1183	
		UNDEFINED	1184 THROUGH 1193	
		MSC GENERAL	1194	
		136 FT	1195	
		ADJUTANT	1196	
		ARKOE	1197	
		BAY	1198	
		DOKKUM	1199	
		HATSUSHIMA	1200	
		HAYASE	1201	
		DISUSED	1202	

5.2-715

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		KOUZJ	1203	
		LENIWKA	1204	
		HAMELN MSC (TYPE 343)	1205	
		MSC 268	1206	
		MSC 292	1207	
		MSC 294	1208	
		NOTEC	1209	
		SASHA	1210	
		SAUDA	1211	
		DISUSED	1212	
		DISUSED	1213	
		SONYA	1214	
		T-301	1215	
		T-43	1216	
		TAKAMI	1217	
		DISUSED	1218	
		VANYA	1219	
		VANYA I	1220	
		VANYA II	1221	
		WUSONG	1222	
		ZHENYA	1223	
		UNDEFINED	1224 THROUGH 1263	
		MSI GENERAL	1264	
		DISUSED	1265	
		AUX MINESWEEPER NO 1	1266	
		CAPE	1267	
		FRAUENLOB (TYPE 394)	1268	
		HAM	1269	
		HERSTAL	1270	
		KIISKI	1271	
		KUHA	1272	
		M-111	1273	
		M-15	1274	
		M-31	1275	
		M-43/47	1276	
		PIPA-A	1277	
		WOCHANG	1278	
		YEVGENYA	1279	
		YUKTO	1280	
		UNDEFINED	1281 THROUGH 1302	
		MSR GENERAL	1303	
		UNDEFINED	1304 THROUGH 1313	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		MSB GENERAL	1314	
		K-8	1315	
		N-300	1316	
		NESTIN	1317	
		N0. 7	1318	
		OLYA	1319	
		PO-2	1320	
		TR-40	1321	
		VD-141	1322	
		VULCAIN	1323	
		STYX	1324	
		PLUTON	1325	
		ACHERON	1326	
		UNDEFINED	1327 THROUGH 1334	
		MSA GENERAL	1335	
		UNDEFINED	1336 THROUGH 1345	
		MSD GENERAL	1346	
		HFG-1 (TROIKA)	1347	
		ILYUSHA	1348	
		UNDEFINED	1349 THROUGH 1358	
		MCSD GENERAL	1359	
		UNDEFINED	1360 THROUGH 1369	
		MSS GENERAL	1370	
		ANDRYUSHA	1371	
		BALTIKA	1372	
		POLNOCNY	1373	
		UNDEFINED	1374 THROUGH 1383	
		MSH GENERAL	1384	
		UNDEFINED	1385 THROUGH 1394	
		MSO GENERAL	1395	
		BERLAIMONT (MODIFIED)	1396	
		UNDEFINED	1397 THROUGH 1405	
		MSHC GENERAL	1406	
		HUNT	1407	
		TRIPARTITE	1408	
		WILTON	1409	
		UNDEFINED	1410 THROUGH 1419	
		PP GENERAL	1420	
		AB 25	1421	
		UNDEFINED	1422	
		BALDER	1423	
		CASTLE	1424	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		ISLAND	1425	
		KRONSTADT	1426	
		PC-1638	1427	
		UNDEFINED	1428 THROUGH 1438	
		PG GENERAL	1439	
		BESKYTTEVREN	1440	
		BIHORO	1441	
		ERIMO	1442	
		DISUSED	1443	
		HVIDBJOERNEN	1444	
		IZU	1445	
		KOJIMA	1446	
		UNDEFINED	1447	
		NOJIMA	1448	
		PAUK	1449	
		PEACOCK	1450	
		POTI	1451	
		SAVAGE	1452	
		SHIRETOKO	1453	
		SOYA	1454	
		TACOMA	1455	
		LEOPARD (TYPE 148)	1456	
		BAMBU	1457	
		CASSIOPEA	1458	
		UNDEFINED	1459 THROUGH 1480	
		PGS GENERAL	1481	
		UNDEFINED	1482 THROUGH 1491	
		PGB GENERAL	1492	
		UNDEFINED	1493 THROUGH 1502	
		PGF GENERAL	1503	
		ALBATROS (TYPE 143)	1504	
		ASHEVILLE	1505	
		BARNEGAT	1506	
		CHONGJU	1507	
		GEPAARD (TYPE 143A)	1508	
		HOUKU	1509	
		IVANSUSANIN	1510	
		KAMAN	1511	
		KARTAL	1512	
		KOMAR	1513	
		LA COMBATTANTE II	1514	
		LA COMBATTANTE III	1515	

FIELD CODING FOR J12.6E0

(SHEET 48)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		LURSSSEN FPB 57 TYPE	1516	
		OKHTENSKIY	1517	
		OSA I	1518	
		OSA II	1519	
		P-4	1520	
		PURGA	1521	
		SAAR 2	1522	
		SAAR 3	1523	
		SAAR 4	1524	
		SAAR 5	1525	
		SARIWON	1526	
		SNOEGG	1527	
		SOHUNG	1528	
		SOJU	1529	
		SORUM	1530	
		STORM	1531	
		T	1532	
		T-43	1533	
		T-58	1534	
		VOSPER 100-FT	1535	
		VOSPER BRAVE	1536	
		WILLEMOES	1537	
		UNDEFINED	1538 THROUGH 1583	
		PC GENERAL	1584	
		ADMIRABLE	1585	
		AGDLEK	1586	
		AKIZUKI	1587	
		ATTACK	1588	
		BAY	1589	
		DISUSED	1590	
		BROOKE MARINE 108-FT	1591	
		CACINE	1592	
		CHONGJU	1593	
		DAPHNE	1594	
		GDANSK	1595	
		HAIKOU	1596	
		HAINAN	1597	
		HANOE	1598	
		K-48	1599	
		KRALJEVICA	1600	
		KRONSHADT	1601	
		LAKE	1602	

FIELD CODING FOR J12.6E0

(SHEET 49)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		MAGAEN	1603	
		MATSUNAMI	1604	
		MIZUTORI	1605	
		MURAKUMO	1606	
		OBLUZE	1607	
		PGM 71	1608	
		SDB MK II	1609	
		SDB MK III	1610	
		SEAFORTH	1611	
		SHANGHAI	1612	
		SHANGHAI II	1613	
		SHANGHAI II (MODIFIED)	1614	
		SHIKINAMI	1615	
		SO-1	1616	
		SOMAN	1617	
		STENKA	1618	
		T-58	1619	
		TAECHONG	1620	
		UK FORD	1621	
		UMIGIRI	1622	
		US 110-FT	1623	
		US 173-FT	1624	
		UNDEFINED	1625	
		ARCHER	1626	
		ATTACKER	1627	
		23M PC (MANLY)	1628	
		UNDEFINED	1629	THROUGH 1681
		PCF GENERAL	1682	
		BABOCHKA	1683	
		MURAVEY	1684	
		POTI	1685	
		SO-1 (MODIFIED)	1686	
		UNDEFINED	1687	THROUGH 1696
		PCE GENERAL	1697	
		UNDEFINED	1698	THROUGH 1707
		PB GENERAL	1708	
		AKAGI	1709	
		AKIZUKI	1710	
		ALBATROZ	1711	
		ATTACK P-90	1712	
		BARSO	1713	
		BAY	1714	

FIELD CODING FOR J12.6E0

(SHEET 50)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		BIZAN	1715	
		BROOKE MARINE 37.5M	1716	
		CHONGJIN	1717	
		DABUR	1718	
		DALARO	1719	
		DE L'ESTEREL	1720	
		DILOS	1721	
		DOM ALEIXO	1722	
		DISUSED	1723	
		FREMANTLE	1724	
		GOULANDRIS	1725	
		GUANABACOA	1726	
		HAMAGIRI	1727	
		HAMELIN 37M	1728	
		HIDAKA	1729	
		HUANGPU	1730	
		INTERCEPTOR MK II	1731	
		KIMJIN 67-FT	1732	
		MATSUNAMI	1733	
		MURAKUMO	1734	
		OIRASE	1735	
		P 400	1736	
		P-6	1737	
		PANAGOPOULOS	1738	
		PATRA	1739	
		PBR MK II	1740	
		PBR MK III	1741	
		PGM 71	1742	
		PO-2	1743	
		POLISH K-8	1744	
		POLUCHAT I	1745	
		SHANTOU	1746	
		SHIKINAMI	1747	
		SINHUNG 72-FT	1748	
		SKANOER	1749	
		SOYA/TSUGARU	1750	
		SPEAR	1751	
		STEWART 85-FT	1752	
		SWATOW	1753	
		SWIFT	1754	
		TAISHAN	1755	
		TESHIO	1756	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		TRACKER II	1757	
		US 110-FT	1758	
		US ARMY 2001 65-FT	1759	
		USCG 83-FT	1760	
		VEDETTE 28 92-FT	1761	
		VIKRAM	1762	
		VOSPER 70-FT	1763	
		YAMAYURI	1764	
		ZHUK	1765	
		SNOEGG	1766	
		MARS	1767	
		TRIDENT	1768	
		UNDEFINED	1769 THROUGH 1842	
		PBF GENERAL	1843	
		CHAO (CHODO)	1844	
		DE L'ESTEREL	1845	
		GIRNE	1846	
		HAUK	1847	
		HUGIN	1848	
		SLEPEN	1849	
		UNDEFINED	1850	
		SPICA II	1851	
		MARS	1852	
		UNDEFINED	1853 THROUGH 1863	
		PBS GENERAL	1864	
		UNDEFINED	1865 THROUGH 1874	
		PBR GENERAL	1875	
		LEIE	1876	
		PIYAVKA	1877	
		SHMEL	1878	
		VOSH	1879	
		YATUSH	1880	
		YAZ	1881	
		UNDEFINED	1882 THROUGH 1891	
		PT GENERAL	1892	
		AN JU	1893	
		EPITROP	1894	
		HIGGINS 78-FT	1895	
		HUCHUAN PTH-	1896	
		HUZHOU	1897	
		IWON	1898	
		DISUSED	1899	

FIELD CODING FOR J12.6E0

(SHEET 52)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		KU SONG	1900	
		NO. 11	1901	
		P-4	1902	
		P-6	1903	
		PILICA	1904	
		SHERSHEN	1905	
		SIN HUNG	1906	
		SIN NAM	1907	
		SINPO	1908	
		SOLOVEN	1909	
		SPICA	1910	
		TJELD	1911	
		WISLA	1912	
		DISUSED	1913	
		SHANGDONG	1914	
		TURYA	1915	
		UNDEFINED	1916 THROUGH 2047	
		PHM GENERAL	2048	
		MATKA	2049	
		PEGASUS	2050	
		SARANCHA	2051	
		SHIMRIT	2052	
		SPARVIERO	2053	
		UNDEFINED	2054 THROUGH 2063	
		BM GENERAL	2064	
		UNDEFINED	2065 THROUGH 2074	
		BMR GENERAL	2075	
		UNDEFINED	2076 THROUGH 2085	
		SWCL GENERAL	2086	
		UNDEFINED	2087 THROUGH 2096	
		AA GENERAL	2097	
		UNDEFINED	2098 THROUGH 2107	
		AG GENERAL	2108	
		ADOLF	2109	
		AKIZUKI	2110	
		ANGARA	2111	
		ARGO	2112	
		AYANAMI	2113	
		DISUSED	2114 THROUGH 2115	
		CHAMOIS	2116	
		CHIHAYA	2117	
		DALDYN	2118	

FIELD CODING FOR J12.6E0

(SHEET 53)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		DISUSED	2119	
		DINGHAI	2120	
		ENDURANCE	2121	
		EXPLORER	2122	
		DISUSED	2123	
		FRIPONNE	2124	
		GALEB	2125	
		UNDEFINED	2126	
		HAM	2127	
		DISUSED	2128	
		HAYABUSA	2129	
		DISUSED	2130	
		ISLES	2131	
		KEYLA	2132	
		KURIHAMA	2133	
		L' ARCHEONAUTE	2134	
		L' ATHOS	2135	
		UNDEFINED	2136	
		LENTRA	2137	
		LIANYUN	2138	
		LSIL	2139	
		MIZUTORI	2140	
		MP-2	2141	
		MP-8	2142	
		MURASAME	2143	
		NEFTEGAZ	2144	
		NØ. 81	2145	
		NORGE	2146	
		OHRE	2147	
		ONEGA	2148	
		DISUSED	2149	
		POSEIDON	2150	
		PS-10	2151	
		RARI	2152	
		RHIN	2153	
		SABAC	2154	
		SHAHSAVAR	2155	
		ST. LYKODIS	2156	
		STALWART	2157	
		T-43	2158	
		TAPATAI	2159	
		TAPPE	2160	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		THULE	2161	
		TOMBA	2162	
		TSUGARU	2163	
		UMITAKA	2164	
		US 184 FT. PCE	2165	
		US 72 FT. HMDL	2166	
		VANGUARD	2167	
		VIS	2168	
		VYTEGRALES	2169	
		WHISKEY	2170	
		WILHELM PULLWER (TYPE 741)	2171	
		PELIKAAN	2172	
		RANCE	2173	
		MERCURE	2174	
		STERNE	2175	
		ALBATROS	2176	
		PHENIX	2177	
		UNDEFINED	2178 THROUGH 2256	
		ARV GENERAL	2257	
		ARGUS	2258	
		ENGADINE	2259	
		RELIANT	2260	
		UNDEFINED	2261 THROUGH 2270	
		AVT GENERAL	2271	
		LEXINGTON	2272	
		UNDEFINED	2273 THROUGH 2282	
		AE GENERAL	2283	
		EVROS	2284	
		DISUSED	2285	
		KILAUEA	2286	
		NITRO	2287	
		REGENT	2288	
		SURIBACHI	2289	
		WESTERWALD (TYPE 760)	2290	
		UNDEFINED	2291 THROUGH 2301	
		AEL GENERAL	2302	
		UNDEFINED	2303 THROUGH 2312	
		AET GENERAL	2313	
		UNDEFINED	2314 THROUGH 2323	
		AETL GENERAL	2324	
		UNDEFINED	2325 THROUGH 2334	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		AGF GENERAL	2335	
		ABDIEL	2336	
		CORONADO	2337	
		GODETIA	2338	
		LA SALLE	2339	
		DISUSED	2340	
		ZINNIA	2341	
		ELBE (TYPE 404)	2342	
		UNDEFINED	2343	THROUGH 2351
		ACM GENERAL	2352	
		UNDEFINED	2353	THROUGH 2362
		APB GENERAL	2363	
		MICHELANGELO	2364	
		UNDEFINED	2365	THROUGH 2374
		ABU GENERAL	2375	
		CARDENAS	2376	
		FINIK I	2377	
		KARPF II	2378	
		SKB 64	2379	
		YANTAI	2380	
		YANNAN	2381	
		YANGUAN	2382	
		TIANEE	2383	
		LA PRUDENTE	2384	
		UNDEFINED	2385	THROUGH 2395
		ABUD GENERAL	2396	
		UNDEFINED	2397	THROUGH 2406
		ANL GENERAL	2407	
		UNDEFINED	2408	THROUGH 2417
		ARC GENERAL	2418	
		EMBA I	2419	
		EMBA II	2420	
		KALAR	2421	
		KLASMA	2422	
		MP-2	2423	
		NEPTUNE	2424	
		TELNOVSK (MODIFIED)	2425	
		YOUDIAN	2426	
		ZEUS	2427	
		UNDEFINED	2428	THROUGH 2440
		AK GENERAL	2441	
		2ND LT JOHN P BOBO	2442	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		ALCHIBA	2443	
		AMGUEMA	2444	
		ANDIZHAN	2445	
		ANDONG	2446	
		ANDROMEDA (CONVERTED)	2447	
		DISUSED	2448	
		BARRICADE	2449	
		BITTERBUSH	2450	
		C3-S-33A TYPE	2451	
		(CONVERTED)		
		C4-S-66A TYPE	2452	
		C4-S-69B TYPE	2453	
		C4-S-A3 TYPE	2454	
		C5-S-75A TYPE	2455	
		CHULYM	2456	
		CPL LOUIS J HAUGE JR	2457	
		DINGHAI	2458	
		DONBA SS	2459	
		FS DESIGN 330	2460	
		GALATI	2461	
		HONGQI	2462	
		ISLES	2463	
		KANARYA	2464	
		KOLOMNA	2465	
		LENINGRADSKY KOMSOMOLETS	2466	
		LSIL	2467	
		NEON ANTONOV	2468	
		NORWALK	2469	
		PT-61	2470	
		SGT MATEJ KOCAK	2471	
		THROSK	2472	
		TREE	2473	
		YANHANG	2474	
		YUNYY PARTIZAN	2475	
		UNDEFINED	2476	THROUGH 2521
		AKL GENERAL	2522	
		ELTANIN	2523	
		KEYLA	2524	
		UNDEFINED	2525	
		LENTRA	2526	
		UNDEFINED	2527	
		MP 4	2528	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		MP 6	2529	
		MUNA	2530	
		SEKSTAN	2531	
		TELNOVSK	2532	
		WISTING	2533	
		GORGONA	2534	
		UNDEFINED	2535 THROUGH 2549	
		AKR GENERAL	2550	
		ALGOL (SL 7)	2551	
		CALLAGHAN	2552	
		COMET	2553	
		METEOR	2554	
		DISUSED	2555	
		MAINE (CONVERTED)	2556	
		UNDEFINED	2557 THROUGH 2566	
		AFS GENERAL	2567	
		FORT	2568	
		UNDEFINED	2569	
		MARS	2570	
		RESOURCE	2571	
		UNDEFINED	2572 THROUGH 2580	
		AOE GENERAL	2581	
		SACRAMENTO	2582	
		SAGAMI	2583	
		UNDEFINED	2584 THROUGH 2593	
		AD GENERAL	2594	
		YELLOWSTONE	2595	
		SAMUEL GOMPERS	2596	
		DIXIE	2597	
		STALWART	2598	
		UNDEFINED	2599 THROUGH 2608	
		AWW GENERAL	2609	
		UNDEFINED	2610 THROUGH 2619	
		AH GENERAL	2620	
		HAVEN	2621	
		OB	2622	
		DISUSED	2623	
		UNDEFINED	2624 THROUGH 2632	
		AGB GENERAL	2633	
		DOBRYNYA NIKITICH	2634	
		HANSE	2635	
		IVANSUSANIN	2636	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		SHIRASE	2637	
		YANHA	2638	
		UNDEFINED	2639 THROUGH 2648	
		AGBL GENERAL	2649	
		EISVOGEL (TYPE 721)	2650	
		DISUSED	2651	
		UNDEFINED	2652 THROUGH 2661	
		AGI GENERAL	2662	
		ALPINIST	2663	
		ARMINZA	2664	
		UNDEFINED	2665	
		BALZAM	2666	
		BOLOGOE	2667	
		DISUSED	2668	
		HAM	2669	
		DISUSED	2670	
		DISUSED	2671	
		LENTA	2672	
		MAYAK	2673	
		MIRNY	2674	
		MOMA	2675	
		NIKOLAY ZUBOV	2676	
		OKEAN	2677	
		DISUSED	2678	
		PAMIR	2679	
		PRIMORYE	2680	
		ALSTER (TYPE 423)	2681	
		UNDEFINED	2682 THROUGH 2705	
		ALS GENERAL	2706	
		UNDEFINED	2707 THROUGH 2716	
		AEM GENERAL	2717	
		AMGA	2718	
		ANDIZHAN (MODIFIED)	2719	
		LAMA	2720	
		MALINA	2721	
		MELITOPOL	2722	
		MP 6	2723	
		UNDEFINED	2724 THROUGH 2733	
		AGM GENERAL	2734	
		AGM-24	2735	
		GEN HOYT S VANDENBERG	2736	
		OBSERVATION ISLAND	2737	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		RANGE SENTINEL	2738	
		(HASKELL TYPE)		
		REDSTONE	2739	
		UNDEFINED	2740 THROUGH 2749	
		AGOR GENERAL	2750	
		ABKHAZIYA	2751	
		AKADEMIK KRYLOV	2752	
		ARAD	2753	
		BALIKPAPAN	2754	
		BELGICA	2755	
		DISUSED	2756	
		COOK	2757	
		D'ENTRECASTEAUX	2758	
		DOBRYNYA NIKITICH	2759	
		DONG MING	2760	
		ELTANIN	2761	
		ENDEAVOR	2762	
		FRANCESCO NULLO	2763	
		DISUSED	2764	
		GRIGORE ANTIPA	2765	
		GYRE	2766	
		HAYES	2767	
		HECLA	2768	
		MELVILLE	2769	
		MSC 60	2770	
		NAUTILUS	2771	
		NEVELSKOY	2772	
		NIKOLAY ZUBOV	2773	
		PITHEAS	2774	
		POLYUS	2775	
		QUEST	2776	
		ROBERT D CONRAD	2777	
		T-43	2778	
		TRITON	2779	
		TUI	2780	
		TYDEMAN	2781	
		XIANG YANG HONG	2782	
		YANLUN	2783	
		YUG	2784	
		ZENOBE GRAMME	2785	
		MAYAK	2786	
		UNDEFINED	2787 THROUGH 2823	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		AGOB GENERAL	2824	
		POLARSTERN	2825	
		UNDEFINED	2826 THROUGH 2835	
		AGOS GENERAL	2836	
		UNDEFINED	2837 THROUGH 2845	
		AO GENERAL	2846	
		UNDEFINED	2847	
		AKAR	2848	
		ALBAY BURBAK	2849	
		ALTAY	2850	
		UNDEFINED	2851	
		BASKUNCHAK	2852	
		BAYLEAF	2853	
		BINBASI GURGAN	2854	
		DISUSED	2855	
		CIMARRON	2856	
		CIMARRON (JUMBOISED)	2857	
		DORA	2858	
		HAMANA	2859	
		DISUSED	2860	
		DISUSED	2861	
		HENRY J KAISER	2862	
		IRTYSH	2863	
		KALININGRADNEFT	2864	
		KH0BI	2865	
		KONDA	2866	
		METTAWEE	2867	
		MISPILLION (JUMBOISED)	2868	
		MOSKIT	2869	
		NEOSHO	2870	
		NERCHA	2871	
		NORWEGIAN BOW	2872	
		OLEKMA	2873	
		PATAPSCO	2874	
		PEVEK	2875	
		UNDEFINED	2876	
		SOFIYA	2877	
		SPESSART (TYPE 704A)	2878	
		TASKIZAK	2879	
		USEDOM	2880	
		WALCHENSEE (TYPE 703)	2881	
		WAVE	2882	

FIELD CODING FOR J12.6E0

(SHEET 61)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		DISUSED	2883	
		YUZBASI TOLUNAY	2884	
		BRAMBLELEAF	2885	
		UNDEFINED	2886 THROUGH 2936	
		AOT GENERAL	2937	
		AMERICAN EXPLORER	2938	
		AOTL	2939	
		EBANOL	2940	
		FULIN	2941	
		FUZHOU	2942	
		GUANZGHOU	2943	
		LEIZHOU	2944	
		MAUMEE	2945	
		METTAWEE	2946	
		MISSION	2947	
		POTOMOC	2948	
		SEALIFT	2949	
		SUAMICO	2950	
		T 5 TYPE	2951	
		TM2	2952	
		PORT VENDRES	2953	
		UNDEFINED	2954 THROUGH 2973	
		AOTL GENERAL	2974	
		DISUSED	2975	
		KH0BI	2976	
		UNDEFINED	2977 THROUGH 2986	
		AOR GENERAL	2987	
		BANDAR ABBAS	2988	
		BEREZINA	2989	
		BORIS CHILIKIN	2990	
		CAPITAN OLA PANTOJA	2991	
		DEEPAK	2992	
		DUBNA	2993	
		DURANCE	2994	
		FUQING	2995	
		KAZBEK	2996	
		KHARG	2997	
		MEERSBURG (TYPE 701C)	2998	
		MESAR	2999	
		OLWEN	3000	
		POOLSTER	3001	
		POLYARNIK	3002	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		PROTECTEUR	3003	
		PROVIDER	3004	
		ROVER	3005	
		SAO GABRIEL	3006	
		STROMBOLI	3007	
		TIDE (IMPROVED)	3008	
		UDA	3009	
		WICHITA	3010	
		FORT VICTORIA	3011	
		BERLIN (TYPE 702C)	3012	
		UNDEFINED	3013 THROUGH 3042	
		AORL GENERAL	3043	
		LEIZHOU	3044	
		UNDEFINED	3045 THROUGH 3054	
		AOL GENERAL	3055	
		PUNARUU	3056	
		UNDEFINED	3057 THROUGH 3065	
		AGP GENERAL	3066	
		GRAHAM COUNTY	3067	
		NORGE	3068	
		DISUSED	3069	
		MERCUUR	3070	
		UNDEFINED	3071 THROUGH 3079	
		AP GENERAL	3080	
		MIKHAIL KALININ	3081	
		PANDORA	3082	
		QIONGSHA	3083	
		UNDEFINED	3084 THROUGH 3093	
		AGR GENERAL	3094	
		UNDEFINED	3095 THROUGH 3104	
		AOSR GENERAL	3105	
		UNDEFINED	3106 THROUGH 3115	
		AR GENERAL	3116	
		ACHELOUS	3117	
		AJAX	3118	
		AMPHION	3119	
		AMUR	3120	
		ARL I	3121	
		DALIANG	3122	
		DILIGENCE	3123	
		DIXIE	3124	
		JULES VERNE	3125	

FIELD CODING FOR J12.6E0

(SHEET 63)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		OSKOL	3126	
		RHIN	3127	
		STALWART	3128	
		UNDEFINED	3129 THROUGH 3145	
		ARL GENERAL	3146	
		ARCHELOUS	3147	
		UNDEFINED	3148 THROUGH 3157	
		AGE GENERAL	3158	
		BELGICA	3159	
		BERRY	3160	
		UNDEFINED	3161	
		COMMANDANT RIVIERE	3162	
		DESNA	3163	
		DOBRYNYA NIKITICH	3164	
		EF 3	3165	
		HENRI POINCARE	3166	
		ILE D'OLERON	3167	
		IVANSUSANIN	3168	
		KOLOMNA	3169	
		LENTA	3170	
		MARSHAL NEDELIN	3171	
		MOMA	3172	
		MP-8	3173	
		MUNA	3174	
		NARVIK	3175	
		OS-3	3176	
		POINT LOMA	3177	
		POTOK	3178	
		QUARTO	3179	
		SASHA	3180	
		SIBIR	3181	
		SO-1	3182	
		T-43	3183	
		TRITON	3184	
		DISUSED	3185	
		YAL 01	3186	
		YANXI	3187	
		ROSSETTI	3188	
		DENTI	3189	
		MONGE	3190	
		UNDEFINED	3191 THROUGH 3227	
		ARS GENERAL	3228	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		BOLSTER	3229	
		DISUSED	3230	
		INGUL	3231	
		KATUN I	3232	
		KATUN II	3233	
		KOWAN	3234	
		LSIL 351	3235	
		MIKHAIL RUDNITSKY	3236	
		OREL	3237	
		PAMIR	3238	
		PIAST	3239	
		PROTEO	3240	
		PS-11	3241	
		SAFEGUARD	3242	
		SILVA	3243	
		SPASILAC	3244	
		DISUSED	3245	
		US 149 FT	3246	
		YANDING	3247	
		UNDEFINED	3248 THROUGH 3273	
		ARSD GENERAL	3274	
		UNDEFINED	3275 THROUGH 3284	
		ASVR GENERAL	3285	
		UNDEFINED	3286 THROUGH 3295	
		AOS GENERAL	3296	
		ALATNA	3297	
		LUZA	3298	
		URAL	3299	
		VALA	3300	
		TONTI	3301	
		UNDEFINED	3302 THROUGH 3311	
		AF GENERAL	3312	
		CROITOR	3313	
		DANLIN	3314	
		MAYAK	3315	
		RIEGEL	3316	
		UNDEFINED	3317 THROUGH 3326	
		AKS GENERAL	3327	
		UNDEFINED	3328 THROUGH 3337	
		AKSL GENERAL	3338	
		UNDEFINED	3339 THROUGH 3348	
		AFL GENERAL	3349	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		UNDEFINED	3350 THROUGH 3359	
		ASR GENERAL	3360	
		ANTEO	3361	
		CHANTICLEER	3362	
		DAHIANG	3363	
		DALANG	3364	
		ELBRUS	3365	
		FEHMARN (TYPE 720B)	3366	
		FUSHIMI	3367	
		GALATI	3368	
		HUDONG	3369	
		KURTARAN	3370	
		NEPA	3371	
		PIGEON	3372	
		PRUT	3373	
		ROSLAVL	3374	
		SPASILAC	3375	
		VALDAY	3376	
		ZHONGHUA	3377	
		UNDEFINED	3378 THROUGH 3401	
		AS GENERAL	3402	
		ACHELOUS	3403	
		AEGIR	3404	
		DISUSED	3405	
		ATREK	3406	
		CHIYODA	3407	
		DADONG	3408	
		DAZHOU	3409	
		DIVER	3410	
		DNEPR	3411	
		DNEPR (MODIFIED)	3412	
		DON	3413	
		EMORY S LAND	3414	
		FULTON	3415	
		HUNLEY	3416	
		L Y SPEAR	3417	
		PROTEUS	3418	
		DISUSED	3419	
		SIMON LAKE	3420	
		UGRA	3421	
		UNDEFINED	3422 THROUGH 3447	
		ASL GENERAL	3448	

FIELD CODING FOR J12.6E0

(SHEET 66)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		UNDEFINED	3449 THROUGH 3458	
		AGS GENERAL	3459	
		AGS 39 CLASS	3460	
		AKASHI	3461	
		ALMEIDA CARVALHO	3462	
		AMMIRAGLIO MAGNAGHI	3463	
		ANDRIJA MOHOROVICIC	3464	
		AUK	3465	
		BIYA	3466	
		BOLOGUE	3467	
		UNDEFINED	3468	
		BUYSKES	3469	
		C4-S-A1 TYPE (CONVERTED)	3470	
		CHAUVENET	3471	
		COOK	3472	
		DING HAI	3473	
		FINIK	3474	
		FS DESIGN 330	3475	
		FUTAMI	3476	
		HAMASHIO	3477	
		HEIYO	3478	
		KAIBOKAN I	3479	
		KAIYO	3480	
		KAMENKA	3481	
		DISUSED	3482	
		UNDEFINED	3483	
		L'ESPERANCE	3484	
		UNDEFINED	3485	
		LENTRA	3486	
		LSIL	3487	
		MEIYO	3488	
		MELITOPOL	3489	
		MOMA	3490	
		MONOWAI	3491	
		MORESBY	3492	
		MP-8	3493	
		MSC-294 (BLUEBIRD)	3494	
		NYRYAT I	3495	
		NYRYAT II	3496	
		SAMARA	3497	
		SHOYO	3498	
		SILAS BENT	3499	

FIELD CODING FOR J12.6E0

(SHEET 67)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		STERNE	3500	
		SUMA	3501	
		T-43	3502	
		TAKUYO	3503	
		TELNOVSK	3504	
		TELNOVSK (MODIFIED)	3505	
		TENYO	3506	
		VICTORY (CONVERTED)	3507	
		WILKES	3508	
		YANLAI	3509	
		YANXU	3510	
		MIRTO	3511	
		MARS	3512	
		LAPEROUSE	3513	
		UNDEFINED	3514	THROUGH 3579
		AGSA GENERAL	3580	
		UNDEFINED	3581	THROUGH 3590
		AGSC GENERAL	3591	
		EXPLORER	3592	
		FLINDERS	3593	
		TAINO	3594	
		BULLDOG	3595	
		ROEBUCK	3596	
		UNDEFINED	3597	THROUGH 3604
		AX GENERAL	3605	
		ARIS	3606	
		DISUSED	3607	
		JADRAN	3608	
		JERVIS BAY	3609	
		JOSE MARTI	3610	
		MP-8	3611	
		SMOLNY	3612	
		UGRA	3613	
		VIETNAM HEROICO	3614	
		WODNIK	3615	
		UNDEFINED	3616	THROUGH 3630
		AXL GENERAL	3631	
		UNDEFINED	3632	
		LEOPARD	3633	
		MAYAK	3634	
		UNDEFINED	3635	THROUGH 3642
		AXS GENERAL	3643	

FIELD CODING FOR J12.6E0

(SHEET 68)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		AMERIGO VESPUCCI	3644	
		CAROLY	3645	
		CARSARO II	3646	
		GORCH FOCK (TYPE 441A)	3647	
		MIRCEA	3648	
		PALINURO	3649	
		SAGRES	3650	
		STELLA POLARE	3651	
		UNDEFINED	3652	THROUGH 3659
		AT GENERAL	3660	
		UNDEFINED	3661	THROUGH 3665
		ATA GENERAL	3666	
		ABNAKI	3667	
		APACHE	3668	
		ARMY 254	3669	
		ATAK	3670	
		ATLANTE	3671	
		AZUMA	3672	
		BELIER	3673	
		UNDEFINED	3674	
		GAJ	3675	
		GNIEWKO	3676	
		GORYN	3677	
		GROMOVOY	3678	
		KUDRET	3679	
		MAITO	3680	
		MB-31	3681	
		MB-65	3682	
		MOTYL	3683	
		OKHTENSKIY	3684	
		ONCU	3685	
		POWHATAN	3686	
		ROSLAVL	3687	
		ROYSTERER	3688	
		SAINT	3689	
		SCHULTZ XAVIER	3690	
		SORUM	3691	
		TENACE	3692	
		TUZHONG	3693	
		TYPHOON	3694	
		WANGER00GE (TYPE 722B)	3695	
		ZENIT	3696	

FIELD CODING FOR J12.6E0

(SHEET 69)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		MAITO	3697	
		ARMEN	3698	
		UNDEFINED	3699 THROUGH 3737	
		ATR GENERAL	3738	
		TENACE	3739	
		UNDEFINED	3740 THROUGH 3748	
		ATS GENERAL	3749	
		EDENTON	3750	
		OKHTENSKY	3751	
		LANGEOOG (TYPE 754)	3752	
		ARGUS	3753	
		UNDEFINED	3754 THROUGH 3762	
		AWT GENERAL	3763	
		UNDEFINED	3764	
		BASENTO	3765	
		FUZHOU (MODIFIED)	3766	
		KANGAN	3767	
		LEIZHOU (MODIFIED)	3768	
		LSIL	3769	
		MANYCH	3770	
		MINCIO	3771	
		PIAVE	3772	
		TEVERE	3773	
		ULUBAT	3774	
		VODA	3775	
		YW-83	3776	
		Z	3777	
		UNDEFINED	3778 THROUGH 3797	
		SERVICE CRAFT GENERAL	3798	
		BARGE, GENERAL	3799	
		YO GENERAL	3800	
		YOG GENERAL	3801	
		YHT GENERAL	3802	
		YRNS GENERAL	3803	
		YOS GENERAL	3804	
		YPK GENERAL	3805	
		YRR GENERAL	3806	
		YRB GENERAL	3807	
		YRST GENERAL	3808	
		YOM GENERAL	3809	
		YOSS GENERAL	3810	
		YW GENERAL	3811	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		UNDEFINED	3812 THROUGH 3827	
		YD GENERAL	3828	
		YM GENERAL	3829	
		YFD GENERAL	3830	
		YFP GENERAL	3831	
		YGT GENERAL	3832	
		YR GENERAL	3833	
		UNDEFINED	3834 THROUGH 3840	
		YFD GENERAL	3841	
		YFDB GENERAL	3842	
		YFDM GENERAL	3843	
		YFDL GENERAL	3844	
		UNDEFINED	3845 THROUGH 3850	
		YRD GENERAL	3851	
		YRDB GENERAL	3852	
		YRDM GENERAL	3853	
		YRDL GENERAL	3854	
		UNDEFINED	3855 THROUGH 3861	
		LIGHTER GENERAL	3862	
		YE GENERAL	3863	
		YF GENERAL	3864	
		YFC GENERAL	3865	
		YFR GENERAL	3866	
		YC GENERAL	3867	
		YFT GENERAL	3868	
		UNDEFINED	3869 THROUGH 3878	
		YT GENERAL	3879	
		YTB GENERAL	3880	
		YTM GENERAL	3881	
		YTL GENERAL	3882	
		UNDEFINED	3883 THROUGH 3892	
		YAGF GENERAL	3893	
		YAG GENERAL	3894	
		YV GENERAL	3895	
		YNG GENERAL	3896	
		YP GENERAL	3897	
		YFU GENERAL	3898	
		YAM GENERAL	3899	
		YNC GENERAL	3900	
		YLC GENERAL	3901	
		YVS GENERAL	3902	
		YRG GENERAL	3903	

FIELD CODING FOR J12.6E0

(SHEET 71)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		YAGT GENERAL	3904	
		YPT GENERAL	3905	
		YRC GENERAL	3906	
		YDT GENERAL	3907	
		YNT GENERAL	3908	
		YH GENERAL	3909	
		YFB GENERAL	3910	
		YTR GENERAL	3911	
		YFL GENERAL	3912	
		YAC GENERAL	3913	
		YSR GENERAL	3914	
		YSG GENERAL	3915	
		YDG GENERAL	3916	
		KHABAROV	3917	
		UNDEFINED	3918 THROUGH 3936	
		TM GENERAL	3937	
		TMD GENERAL	3938	
		TMB GENERAL	3939	
		TMK GENERAL	3940	
		TMF GENERAL	3941	
		TMC GENERAL	3942	
		TMCS GENERAL	3943	
		TMWW GENERAL	3944	
		TMA GENERAL	3945	
		TMH GENERAL	3946	
		TMGB GENERAL	3947	
		TMI GENERAL	3948	
		TML GENERAL	3949	
		TMOT GENERAL	3950	
		TMM GENERAL	3951	
		TMP GENERAL	3952	
		TMFR GENERAL	3953	
		TMR GENERAL	3954	
		TMOR GENERAL	3955	
		TMOL GENERAL	3956	
		TME GENERAL	3957	
		TMGS GENERAL	3958	
		TMLS GENERAL	3959	
		TMS GENERAL	3960	
		TMOS GENERAL	3961	
		TMO GENERAL	3962	
		TMX GENERAL	3963	

FIELD CODING FOR J12.6E0

(SHEET 72)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		TMWT GENERAL	3964	
		UNDEFINED	3965 THROUGH 3989	
		TMT GENERAL	3990	
		TMTR GENERAL	3991	
		TMTS GENERAL	3992	
		UNDEFINED	3993 THROUGH 4002	
		TU GENERAL	4003	
		TUF GENERAL	4004	
		TUB GENERAL	4005	
		TUI GENERAL	4006	
		TUR GENERAL	4007	
		TUT GENERAL	4008	
		TUS GENERAL	4009	
		TUC GENERAL	4010	
		TUW GENERAL	4011	
		UNDEFINED	4012 THROUGH 4023	
		TJ GENERAL	4024	
		TJF GENERAL	4025	
		TJC GENERAL	4026	
		TJCS GENERAL	4027	
		TJGB GENERAL	4028	
		UNDEFINED	4029 THROUGH 4038	
		TS GENERAL	4039	
		TSG GENERAL	4040	
		TSR GENERAL	4041	
		UNDEFINED	4042 THROUGH 4052	
		MPS GENERAL	4053	
		UNDEFINED	4054 THROUGH 4069	
		SURFACE SPECIFIC TYPE	4070 THROUGH 4094	
		1-25		
		RESET TO NO STATEMENT	4095	
809	001	SUBSURFACE (MARITIME) SPECIFIC TYPE -----		THE SPECIFIC TYPE OF POINT OR TRACK WITH AN ENVIRONMENT/CATEGORY OF SUBSURFACE (MARITIME).
		NO STATEMENT	0	
		SS GENERAL	1	
		ABTA0 SS	2	
		DISUSED	3	
		DISUSED	4	
		UNDEFINED	5	
		DISUSED	6	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
809	001	SUBSURFACE (MARITIME) SPECIFIC (CONTINUED) TYPE		

		GUPPY II SS	7	
		GUPPY IIA SS	8	
		GUPPY III SS	9	
		HAI LUNG SS	10	
		DISUSED	11	
		SAURO (TYPE 1081) SS	12	
		SAURO (IMPROVED) SS	13	
		TANG SS	14	
		TYPE SNA 72 SS	15	
		UZUSHIO SS	16	
		WALRUS SS	17	
		YUUSHIO SS	18	
		UNDEFINED	19	
		DISUSED	20	
		PELOSI SS	21	
		UNDEFINED	22 THROUGH 360	
		SSB GENERAL	361	
		GOLF SSB	362	
		GOLF II SSB	363	
		GOLF III SSB	364	
		GOLF V SSB	365	
		UNDEFINED	366 THROUGH 440	
		SSBN GENERAL	441	
		BENJAMIN FRANKLIN SSBN	442	
		DELTA I SSBN	443	
		DELTA II SSBN	444	
		DELTA III SSBN	445	
		DELTA IV SSBN	446	
		HOTEL III SSBN	447	
		DISUSED	448	
		L'INFLEXIBLE SSBN	449	
		DISUSED	450	
		UNDEFINED	451	
		OHIO SSBN	452	
		RESOLUTION SSBN	453	
		TYPHOON SSBN	454	
		VANGUARD SSBN	455	
		YANKEE SSBN	456	
		YANKEE I SSBN	457	
		YANKEE II SSBN	458	
		XIA SSBN	459	
		LE TERRIBLE SSBN	460	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
809	001	SUBSURFACE (MARITIME) SPECIFIC (CONTINUED)		
		TYPE		

		UNDEFINED	461	THROUGH 720
		SSN GENERAL	721	
		AKULA SSN	722	
		ALFA SSN	723	
		AMATHEPT SSN	724	
		CHARLIE/VICTOR SSGN/SSN	725	
		CHURCHILL SSN	726	
		ECHO/NOVEMBER SSGN/SSN	727	
		DISUSED	728	
		DISUSED	729	
		HAN SSN	730	
		HOTEL SSN	731	
		LOS ANGELES SSN	732	
		MIKE SSN	733	
		NARWHAL SSN	734	
		DISUSED	735	
		RUBIS SSN	736	
		SEAWOLF SSN	737	
		SIERRA SSN	738	
		DISUSED	739	
		DISUSED	740	
		STURGEON SSN	741	
		SWIFTSURE SSN	742	
		TRAFALGAR SSN	743	
		DISUSED	744	
		VICTOR I SSN	745	
		VICTOR II SSN	746	
		VICTOR III SSN	747	
		YANKEE SSN	748	
		VIRGINIA SSN	749	
		UNDEFINED	750	THROUGH 1200
		SSG GENERAL	1201	
		JULIETT SSG	1202	
		UNDEFINED	1203	THROUGH 1245
		SSGN GENERAL	1246	
		CHARLIE I SSGN	1247	
		CHARLIE II SSGN	1248	
		ECHO II SSGN	1249	
		OSCAR SSGN	1250	
		PAPA SSGN	1251	
		UNDEFINED	1252	THROUGH 1345
		SSK GENERAL	1346	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
809	001	SUBSURFACE (MARITIME) SPECIFIC (CONTINUED)		
		TYPE		

		AGOSTA SSK	1347	
		UNDEFINED	1348	
		FOXTROT SSK	1349	
		HEROJ SSK	1350	
		KILO SSK	1351	
		MING SSK	1352	
		NARVAL SSK	1353	
		DISUSED	1354 THROUGH 1355	
		ROMEO SSK	1356	
		SAVA SSK	1357	
		SUTJESKA SSK	1358	
		TANGO SSK	1359	
		UPHOLDER SSK	1360	
		WHISKEY SSK	1361	
		WHISKEY V SSK	1362	
		ZULU IV SSK	1363	
		DORIS SSK	1364	
		VICTORIA SSK	1365	
		TYPE 212 SSK	1366	
		UNDEFINED	1367 THROUGH 1665	
		SSC GENERAL	1666	
		DELFINEN SSC	1667	
		DRAKEN SSC	1668	
		NAECKEN SSC	1669	
		NARHVALEN SSC	1670	
		SJOORMEN SSC	1671	
		TOTI TYPE 1075 SSC	1672	
		TYPE 205 SSC	1673	
		TYPE 206 SSC	1674	
		KOBLEN SSC	1675	
		TYPE 209 (TYPE 1100) SSC	1676	
		TYPE 209 (TYPE 1200) SSC	1677	
		TYPE 209 (TYPE 1300) SSC	1678	
		TYPE 209 (TYPE 1400) SSC	1679	
		TYPE 209 (TYPE 1500) SSC	1680	
		ULA SSC	1681	
		TYPE 211 SSC	1682	
		VASTERGOETLAND SSC	1683	
		TYPE 206A SSC	1684	
		UNDEFINED	1685 THROUGH 1945	
		SSA GENERAL	1946	
		BRAVO SSA	1947	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

809	001	SUBSURFACE (MARITIME) SPECIFIC (CONTINUED) TYPE		

		DOLPHIN (AGSS) SSA	1948	
		GOLF I SSA	1949	
		GOLF I (MODIFIED) SSA	1950	
		GOLF II SSA	1951	
		INDIA SSA	1952	
		LIMA SSA	1953	
		ROMEO SSA	1954	
		ZULU SSA	1955	
		UNDEFINED	1956 THROUGH 4069	
		SUBSURFACE SPECIFIC TYPE 1-25	4070 THROUGH 4094	
		RESET TO NO STATEMENT	4095	

810	001	LAND (GROUND) SPECIFIC TYPE		

		NO STATEMENT	0	
		TOW	1	
		DRAGON	2	
		LANCE	3	
		SHILLEAGH	4	
		SERGEANT	5	
		AMMUNITION	6	
		POL	7	
		OBSERVATION POSTS	8	
		RADIO DIRECTION FINDER	9	
		RIVER	10	
		STREAM	11	
		LAKE	12	
		MARSH/SWAMP	13	
		MOUNTAIN	14	
		HILLTOP	15	
		RIDGE	16	
		DEPRESSION	17	
		VALLEY	18	
		CAVE	19	
		BRIDGE	20	
		DAM	21	
		BUILDING	22	
		VILLAGE	23	
		TOWN	24	
		ROAD INTERSECTION	25	

THE SPECIFIC TYPE OF POINT OR TRACK
WITH AN ENVIRONMENT/CATEGORY OF
LAND (GROUND).

FIELD CODING FOR J12.6E0

(SHEET 77)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		HOSPITAL	26	
		HAWK	27	
		I-HAWK	28	
		PATRIOT	29	
		NIKE	30	
		REDEYE	31	
		STINKER	32	
		HELLFIRE	33	
		PERSHING	34	
		JEEP	35	
		CAR	36	
		MOTORCYCLE	37	
		BICYCLE	38	
		AMPHIBIOUS VEHICLE	39	
		RIVER CROSSING EQUIPMENT	40	
		MECHANIZED MINE SWEEPER	41	
		MOBILE RADAR	42	
		SMOKE GENERATOR	43	
		(SSSB) SHIP SHORE SHIP	44	
		BUFFER		
		(RADIL) ROCC AWACS	45	
		DIGITAL INTERFACE LINK		
		(ASIT) ADAPTABLE SURFACE	46	
		INTERFACE TERMINAL		
		(AEGIS) AEW GROUND	47	
		INTERFACE SEGMENT		
		AMBULANCE	48	
		BIOLOGICAL WEAPONS	49	
		CHEMICAL WEAPONS	50	
		NUCLEAR WEAPONS	51	
		ENGINEER VEHICLES	52	
		GENERATOR	53	
		JAMMERS	54	
		MAINTENANCE VEHICLE	55	
		MULTIPLE ROCKET LAUNCHER	56	
		RADIO	57	
		REMOTE SENSOR	58	
		SELF PROPELLED ARTILLERY	59	
		TACTICAL BRIDGE	60	
		TOWED ARTILLERY GUN	61	
		RECOILLESS RIFLE	62	
		(TACCP) TACTICAL COMMAND	63	
		POST		

FIELD CODING FOR J12.6E0

(SHEET 78)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE -----	(CONTINUED)	
		BRIGADE	64	
		CORPS	65	
		GROUP	66	
		DIVISION	67	
		REGIMENT	68	
		BATTALION	69	
		COMPANY	70	
		PLATOON	71	
		SQUADRON	72	
		AIRBASE	73	
		WING	74	
		ANTI-AIRCRAFT GUN	75	
		AIR DEFENSE ARTILLERY GUN	76	
		MORTAR	77	
		FLAMETHROWER	78	
		TSC/MOCC/MARITIME HEADQUARTERS	79	
		MAIN BATTLE TANK	80	
		MEDIUM TANK	81	
		LIGHT TANK	82	
		TRAIN	83	
		ARMORED PERSONNEL VEHICLE	84	
		ARMORED INFANTRY FIGHTING VEHICLE	85	
		LIGHT TRUCK	86	
		MEDIUM TRUCK	87	
		HEAVY TRUCK	88	
		TANK TRANSPORTER	89	
		DUMMY	90	
		TRAP	91	
		POINT TARGET	92	
		EA SITE	93	
		ARMORED PERSONNEL CARRIER	94	
		ARMORED INFANTRY FIGHTING VEHICLE	95	
		GCI SITE	96	
		CRC	97	
		TACC (AF)	98	
		CRP	99	
		TACC (MC)	100	

FIELD CODING FOR J12.6E0

(SHEET 79)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE -----	(CONTINUED)	
		MPC	101	
		TAOC	102	
		AADCCS (AN/TSQ-73)	103	
		DASC	104	
		FACP	105	
		FASC	106	
		AADCP	107	
		ASRT	108	
		NCC	109	
		RCC	110	
		ROCC	111	
		DC	112	
		WOC	113	
		(ASOC) AIR SUPPORT OPERATIONS CENTER	114	
		(TCO) TACTICAL COMBAT OPERATIONS CENTER	115	
		(TOC) TACTICAL OPERATIONS CENTER (ARMY)	116	
		CHAPPARAL	117	
		FIRE DIRECTION CENTER	118	
		FIRE UNIT	119	
		DIVARTY	120	
		BATTERY	121	
		SELF-PROPELLED ARTILLERY	122	
		(GOC) GROUND OPERATIONS CENTER	123	
		(ICC) INFORMATION COORDINATION CENTER	124	
		(BOC) BATTERY OPERATIONS CENTER	125	
		(ECS) ENGAGEMENT CONTROL STATION	126	
		(PCP) PLATOON COMMAND POST	127	
		(CRG) COMMUNICATIONS RELAY GROUP	128	
		TUNNELS	129	
		RAILYARDS	130	
		BENCHMARK	131	
		TROOP	132	
		LANDING ZONE	133	

FIELD CODING FOR J12.6E0

(SHEET 80)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE -----	(CONTINUED)	
		DROP ZONE	134	
		ASSEMBLY OR STAGING AREA	135	
		DECONTAMINATION SITE	136	
		RE-ENTRY POINT/LINE	137	
		CROSSING AREA FOR RECON PATROLS		
		SAM	138	
		SSM	139	
		ANTI-TANK WEAPON	140	
		DIRECT SUPPORT	141	
		GENERAL SUPPORT	142	
		INTERCEPTION	143	
		BLOCKING	144	
		REINFORCING	145	
		REDEPLOYMENT	146	
		POLICING	147	
		INTRUDING	148	
		PREPARING BARRIER	149	
		DUMPING EQUIPMENT	150	
		RELIEF	151	
		CONVOY	152	
		ANTI-AIRCRAFT	153	
		AIR DEFENSE ARTILLERY	154	
		ARTILLERY	155	
		SURVEILLANCE	156	
		PICKETING	157	
		LOGISTICS SUPPORT	158	
		SEARCH	159	
		DIRECT ARTILLERY SUPPORT	160	
		GENERAL ARTILLERY SUPPORT	161	
		MAINTAINING LINE OF COMMUNICATION	162	
		COMMITTING	163	
		COUNTER-ATTACK	164	
		ELECTRONIC WARFARE	165	
		THREATEN	166	
		DESTROY	167	
		CONTACT	168	
		EVALUATION	169	
		TRANSPORTER	170	
		ARMORED VEHICLE	171	
		GUN	172	

FIELD CODING FOR J12.6E0

(SHEET 81)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		HALF TRACK	173	
		COMMUNICATIONS EQUIPMENT	174	
		TARGET	175	
		AIR DEFENSE SITE	176	
		FIM-92 STINGER	177	
		NIM-23 HAWK	178	
		MIM-42 REDEYE	179	
		MIM-72 CHAPARRAL	180	
		MIM-104 PATRIOT	181	
		RIM-2 TERRIER	182	
		RIM-7 SEA SPARROW	183	
		RIM-8 TALOS	184	
		RIM-24 TARTAR	185	
		RIM-66 STANDARD MISSILE	186	
		RIM-67 STANDARD MISSILE	187	
		BLOWPIPE	188	
		DISUSED	189 THROUGH 190	
		SEA DART	191	
		DISUSED	192 THROUGH 193	
		CROTALE	194	
		RAPIER	195	
		RBS-70/GIRAFFE	196	
		SAM BLOODHOUND	197	
		SAM ROLAND	198	
		SA-2 GUIDELINE	199	
		SA-3 GOA	200	
		SA-4 GANEF	201	
		SA-N-3 GOBLET	202	
		SA-5 GAMMON	203	
		SA-N-4 GECKO	204	
		SA-6 GAINFUL	205	
		SA-N-6 GRUMBLE	206	
		SA-7 GRAIL	207	
		SA-8 GECKO	208	
		SA-9 GASKIN	209	
		SA-10 GRUMBLE	210	
		SA-11 GADFLY	211	
		SA-12	212	
		SA-13 GOPHER	213	
		MISTRAL	214	
		SA-N-7 GADFLY	215	
		SA-N-8 GREMLIN	216	
		SA-14 GREMLIN	217	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE -----	(CONTINUED)	
		SA-16 GIMLET	218	
		SA-X-17	219	
		TOC (THAAD)	220	
		SSI (THAAD)	221	
		LCS (THAAD)	222	
		LAUNCHER (THAAD)	223	
		TMD-GBR (THAAD)	224	
		JTAGS	225	
		ADTOC/BN	226	
		ADTOC/BDE	227	
		ADCP	228	
		SM-2 BLOCK II	229	
		SM-2 BLOCK III	230	
		SM-2 BLOCK IIIA	231	
		SM-2 BLOCK IIIB	232	
		SM-2 BLOCK IV	233	
		SM-2 BLOCK IVA	234	
		SM-3 LEAP	235	
		SA-N-5 GRAIL	236	
		SA-N-11 GRISOM	237	
		SA-12A GLADIATOR	238	
		SA-12B GIANT	239	
		SA-14 GREMLIN	240	
		SA-15 GAUNTLET	241	
		SA-17 GRIZZLY	242	
		SA-N-12 GRIZZLY	243	
		SA-18 GROUSE	244	
		SA-19 GRISOM	245	
		RIM-116 RAM	246	
		ADATS	247	
		JAVELIN	248	
		STARBURST	249	
		STARSTREAK	250	
		ASPIDER	251	
		FRONT DOOR	252	
		ROLAND II	253	
		AKASH	254	
		ANZA	255	
		ANZA II	256	
		CSA-1	257	
		CSA-2	258	
		CSA-4	259	
		CSA-5	260	

FIELD CODING FOR J12.6E0

(SHEET 83)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		FM-80	261	
		HN-5	262	
		NK-7	263	
		NK-16	264	
		PANTZYR	265	
		RAPIER 2000/JERNAS	266	
		RBS-90	267	
		SAKR	268	
		SAVA	269	
		SHANINE	270	
		SKYGUARD ASPIDE	271	
		SPADA	272	
		TAM SAM	273	
		TIGERCAT	274	
		VANGUARD	275	
		SA-N-1 GOA	276	
		SA-N-9 GAUNTLET	277	
		SA-N-10	278	
		ALBATROS/ASPIDE	279	
		SM-1	280	
		SA-2 IRAQ MOD	281	
		SA-2 NORTH KOREA RO	282	
		AEGIS-TI	283	
		MASURGS	284	
		ROCK CAKE	285	
		SEA INDIGO	286	
		TANSAM	287	
		TOKEN A/D	288	
		GUARDSMAN	289	
		SILKWORM	290	
		SNOW DRIFT 11/17	291	
		TIGER S	292	
		TIGER G	293	
		TUBE ARM SA-11	294	
		SEACAT 262/903/904	295	
		AN/MPQ-4	296	
		AN-TPQ-36	297	
		AN/TPS-25	298	
		CYMBERLINE	299	
		PORK TROUGH 1	300	
		RASIT	301	
		SNAR-6	302	
		TALL MIKE	303	

FIELD CODING FOR J12.6E0

(SHEET 84)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		AN/FPN-33/36/40	304	
		AN/TPN-12/17	305	
		CPN-4, FPN-16/22	306	
		RP-2E	307	
		RP-4G	308	
		THD-1010/1013	309	
		TPN-8/14/18TSQ-7	310	
		TWO SPOT	311	
		CSA-X-2	312	
		ASR-0	313	
		FALCON-G	314	
		MARCON LN66TPS66	315	
		SHEET BEND	316	
		WALL RUST A/B	317	
		DON-2	318	
		DONKAY/PALM FROND	319	
		EYE SHIELD	320	
		MARELD	321	
		PEEL PAIR	322	
		POT HEAD	323	
		RACAL-DECCA	324	
		RICE FIELD	325	
		RICE SCREEN	326	
		RICE CUP	327	
		SQUARE TIE	328	
		SS-N-2	329	
		STRUT CURVE	330	
		STRUT PAIR	331	
		BOFI	332	
		CORN CAN	333	
		DRUM TILT	334	
		ELDORADO	335	
		FLAP WHEEL	336	
		FLEDERMAUS	337	
		FLYCATCHER	338	
		GEPARD	339	
		GUN DISH	340	
		SPAAMG	341	
		TEAMPLAY	342	
		TEAMWORK	343	
		VULCAN	344	
		9LV 200	345	
		AN/SPG-50	346	

FIELD CODING FOR J12.6E0

(SHEET 85)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		BASS TILT	347	
		GOALKEEPER	348	
		HAWK SCREECH	349	
		KITE SCREECH A/B	350	
		OWL SCREECH	351	
		MARK 68 FCS	352	
		MK 57/63 GFCS	353	
		MK-86 GFCS	354	
		MUFF COB	355	
		SIGNAAL STIR 180	356	
		SUN VISOR	357	
		TOP BOW	358	
		TYPE 341	359	
		VEGA	360	
		WM-20 SERIES	361	
		MARCONI S613	362	
		THIN SKIN	363	
		AN/FPS-77	364	
		MRL-1	365	
		MRL-4/5	366	
		BIG BIRD	367	
		SIDE NET	368	
		ODD LOT/PAIR/GROUP	369	
		FIRE WHEEL/MOD	370	
		BARLOCK	371	
		FIRECAN/WHIFF	372	
		GIN SLING	373	
		FRUSKA GORA	374	
		TIN SHIELD	375	
		BIG BAR/MESH	376	
		SS-N-S SCOOP PAIR	377	
		SGR-105 DA-01/00	378	
		CROSS SLOT	379	
		BACK NET/TRAP	380	
		GATE POLE/HIGH/POST	381	
		TOP LOT	382	
		RICE CAKE	383	
		JY-14/9	384	
		TIN TRAP	385	
		HEAD NET A/B/C	386	
		SLIM/SEA/HAIR NET	387	
		LOW SIEVE	388	
		EGG CUP	389	

FIELD CODING FOR J12.6E0

(SHEET 86)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		CUT WEB	390	
		SKYWATCH	391	
		HALF PLATE	392	
		SKIN HEAD	393	
		SIEVE FAMILY	394	
		SO-A	395	
		HIGH SHELL	396	
		AN/FPS-6/89	397	
		DECCA HF200	398	
		MARCONI 5244	399	
		TYPE 88 MK 1	400	
		MARCONI S-247	401	
		AN/MPN-11	402	
		RAT-31S	403	
		AA4 MK 6/7	404	
		AN/TPS-43	405	
		SCR-584	406	
		AN/TPS-48	407	
		MARCONI S-1006/269	408	
		PALMIER	409	
		FIREFINDER LR	410	
		VOLEX III/IV	411	
		THD-1940	412	
		HADR (HR-3000)	413	
		AN/RPS-70/72/75	414	
		MPDR-18/S	415	
		WATCHMAN	416	
		MARCONI S-631/647	417	
		MARCONI S-706/711/712	418	
		AN/TPS-73	419	
		TRS-22XX	420	
		AN/SPS-8	421	
		DECCA AWS-1	422	
		MK-26	423	
		AN/SPS-48	424	
		RAN-7S	425	
		SEA TIGER	426	
		DA-08/2LS	427	
		AWS-9 (TYPE 996)	428	
		DA-05/00	429	
		MPDR-45	430	
		TOP STEER/PLATE	431	
		STRIKE OUT	432	

5.2-757

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE -----	(CONTINUED)	
		SPONGE CAKE	433	
		NC1 ROLAND	434	
		NC1 MISTRAL	435	
		FDOC	436	
		MCT	437	
		CETAC	438	
		ISARD	439	
		UNDEFINED	440 THROUGH 4000	
		WAYPOINT	4001	
		STRIKE INITIAL POINT	4002	
		UNDEFINED	4003 THROUGH 4093	
		RESET TO NO STATEMENT	4094	
		UNDEFINED	4095	
1861	001	SPECIAL INTEREST INDICATOR -----		THE SPECIAL INTEREST INDICATOR IS USED TO INDICATE THAT THE TRACK IS OF SPECIAL INTEREST.
		NO STATEMENT	0	
		SPECIAL INTEREST	1	THE REFERENCE TN IS OF SPECIAL INTEREST. (A.) IF THIS FIELD IS SET TO ONE AND THE IDENTITY IS FRIEND THIS TRACK IS DEFINED AS A "KILO". (B.) IF THIS FIELD IS SET TO ONE AND THE TRACK ENVIRONMENT/CATEGORY IS AIR AND THE IDENTITY IS SUSPECT, THE TRACK IS DEFINED AS A "ZOMBIE". (C.) IF THIS FIELD IS SET TO ONE AND THE TRACK ENVIRONMENT/CATEGORY IS SURFACE (MARITIME) AND THE IDENTITY IS SUSPECT, THE TRACK IS DEFINED AS A "TRAVELLER". (D.) THE USE OF THIS INDICATOR WITH OTHER IDENTITIES IS YET TO BE DETERMINED.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: ENGAGEMENT STATUS CONTINUATION WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00				
TRACK NUMBER, ADDRESSEE												:	SPARE						:	CONTINUATION WORD					:	WORD		:
												:							:	LABEL					:	FORMAT		:
												:							:						:			:
15												:	6						:	5					:	2		:

49	48	47	46	45	44	43	42	41	40	39	38:	37	36	35	34:	33	32	31	30	29:	28:	27	26	25	
TRACK NUMBER, REFERENCE											:	WEAPON ENGAGEMENT STATUS		:	WEAPON SYSTEM				:	:	PTR:		---		
19											:	4		:	5				:	:	1				

:	69	68	67	66	65:	64	63	62	61:	60	59:	58	57:	56	55	54	53	52	51	50					
:						:						:						:							
:	SPARE					:	STRENGTH					:	M4 IND					:	III INT					---	>
:						:						:						:							
:	5					:	4					:	2					:	2					:	

WORD DESCRIPTION

WORD NUMBER: J12.6C1
WORD TITLE: ENGAGEMENT STATUS CONTINUATION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	01
1551	001	CONTINUATION WORD LABEL	2-	6 5	00001
756	006	SPARE	7-	12 6	
769	006	TRACK NUMBER, ADDRESSEE	13-	27 15	
1863	001	POINTER (PTR)	28	1	
700	002	WEAPON SYSTEM	29-	33 5	
394	009	WEAPON ENGAGEMENT STATUS	34-	37 4	
769	002	TRACK NUMBER, REFERENCE	38-	56 19	
815	001	MODE III IFF INTERROGATION (III INT)	57-	58 2	
298	001	MODE IV INDICATOR (M4 IND)	59-	60 2	
386	013	STRENGTH	61-	64 4	
756	005	SPARE	65-	69 5	

FIELD CODING FOR J12.6C1

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	006	TRACK NUMBER, ADDRESSEE -----		THE TN OF A UNIT (I.E., JU OR PU) TO WHICH A MESSAGE IS ADDRESSED.
		NO STATEMENT NUMERIC	0 00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		ILLEGAL NUMERIC	00077 (OCTAL) 00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC	00177 (OCTAL)	COLLECTIVE ADDRESS.
		NUMERIC	00200 THROUGH 07776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL NUMERIC	07777 (OCTAL) 10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
1863	001	POINTER -----		THIS FIELD PROVIDES THE ADDRESSEE TN WITH AN OPERATOR DISPLAY OF A REF- ERENCE POSITION OR TRACK.
		NO STATEMENT DISPLAY	0 1	PROVIDES THE ADDRESSEE TN WITH AN OPERATOR DISPLAY OF A REFERENCE POSITION OR TRACK.
700	002	WEAPON SYSTEM -----		
		NO STATEMENT	0	
		SURFACE-TO-AIR MISSILE (SAM)	1	
		SURFACE-TO-SURFACE MISSILE (SSM)	2	
		AIRCRAFT	3	
		CONVENTIONAL (SHORT RANGE MISSILE OR GUNS)	4	
		ANTISUBMARINE WARFARE HELICOPTER	5	

5.2-762

MIL-STD-6016B

FIELD CODING FOR J12.6C1

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
700	002	WEAPON SYSTEM -----	(CONTINUED)	
		ANTISUBMARINE WARFARE	6	
		MISSILE		
		DEPTH CHARGE/DEPTH BOMB	7	
		TORPEDO	8	
		FIXED WING ANTISUBMARINE	9	
		WARFARE AIRCRAFT		
		LASER	10	
		BEAM WEAPON	11	
		INFRARED DECOY	12	
		CHAFF	13	
		SPOT JAMMER	14	
		BARRAGE JAMMER	15	
		DECEPTION JAMMER	16	
		INTERCEPTOR	17	
		AIR-TO-SURFACE MISSILE	18	
		(ASM)		
		UNDEFINED	19 THROUGH 31	
394	009	WEAPON ENGAGEMENT STATUS -----		PROVIDES THE ENGAGEMENT STATUS OF A WEAPON AGAINST AN OBJECTIVE.
		NO STATEMENT	0	
		RECOMMEND REATTACK	1	THE REFERENCE TN HAS COMPLETED ITS MISSION AGAINST THE TARGET AND RECOMMENDS ANOTHER ASO MISSION BE CONDUCTED AGAINST THE SAME TARGET.
		WEAPON ASSIGNED	2	THE SPECIFIED WEAPON REPORTED IN THE WEAPON SYSTEM FIELD HAS BEEN ALLOCATED TO THE TARGET.
		TRACKING/LOCKED ON/READY TO FIRE/BIRD AFFIRM	3	THE REFERENCE TN'S TRACKING RADAR IS LOCKED ON TO THE TARGET. UNIT IS READY TO FIRE AS SOON AS THE TARGET IS WITHIN WEAPON RANGE AND THE TARGET IS ELIGIBLE FOR DESTRUCTION.
		FIRING/MISSILE IN FLIGHT/ENGAGING TO DESTROY	4	(A.) MISSILE: IF THE WEAPON SYSTEM IS ANY MISSILE, THE REFERENCE TN'S MISSILE HAS BEEN LAUNCHED AND IS ENROUTE TO THE TARGET. (B.) AIRCRAFT: IF WEAPON SYSTEM IS ANY AIRCRAFT, THE REFERENCE TN IS ENGAGING THE TARGET WITH INTENTION TO DESTROY.

5.2-763

MIL-STD-6016B

FIELD CODING FOR J12.6C1

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
394	009	WEAPON ENGAGEMENT STATUS -----	(CONTINUED)	
		EFFECTIVE/TARGET DESTROYED/GRAND SLAM	5	THE TARGET HAS BEEN ENGAGED BY THE REFERENCE TN AND IS NO LONGER A THREAT. THE ENGAGEMENT PREVIOUSLY REPORTED IS BROKEN. THIS VALUE IS TRANSMITTED UNTIL SENSOR CONTACT IS CANCELLED/LOST.
		PARTIALLY EFFECTIVE	6	ALL TARGETS ASSOCIATED WITH THE TARGET TN HAVE NOT BEEN DESTROYED. THE ENGAGEMENT IS CONTINUING.
		NOT EFFECTIVE	7	MISS OR ABORT. THE TARGET IS NOT DESTROYED. THE ENGAGEMENT IS CONTINUING.
		ENGAGEMENT BROKEN	8	THE REFERENCE TN IS TERMINATING THE ACTION PREVIOUSLY REPORTED OR ORDERED AGAINST THE TARGET.
		HEADS UP	9	THE TARGET CONSTITUTES A THREAT TO FRIENDLY FORCES. THE SOURCE TN IS UNABLE TO ASSURE COMPLETE DESTRUCTION OF THE TARGET. THE REFERENCE TN WILL BE SET TO THE TN OF THE SOURCE OR ONE OF ITS SUPPORTING UNITS. THIS VALUE DOES NOT REPORT EITHER AN ENGAGEMENT OR A BREAKING OF AN ENGAGEMENT. THE WEAPON SYSTEM FIELD IS SET TO NO STATEMENT FOR THIS VALUE.
		ENGAGEMENT INTERRUPTED	10	THIS VALUE IS DEFINED AS A NATO NATION NATIONAL REQUIREMENT. U.S. SYSTEMS WILL NOT ORIGINATE THIS STATUS VALUE, AND WHEN RECEIVING THE VALUE, U.S. SYSTEMS WILL INTERPRET AS ENGAGEMENT BROKEN (VALUE 8).
		INVESTIGATING/ INTERROGATING	11	THE REFERENCE TN IS NOT YET TRACKING THE TARGET. IF THE WEAPON SYSTEM IS AIRCRAFT, THE TARGET IS BEING INVESTIGATED BY THE AIRCRAFT WHOSE TN IS SPECIFIED BY THE REFERENCE TN. THE AIRCRAFT WILL NOT FIRE ON THE TARGET UNTIL ORDERED OR THE TARGET BECOMES ELIGIBLE FOR DESTRUCTION UNDER EXISTING DOC- TRINE AND/OR RULES OF ENGAGEMENT.

5.2-764

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
394	009	WEAPON ENGAGEMENT STATUS -----	(CONTINUED)	
		SHADOWING	12	THE REFERENCE TN IS MAINTAINING SURVEILLANCE ON A DESIGNATED TARGET.
		INTERVENING	13	THE REFERENCE TN IS TAKING ACTION TO DIVERT A DESIGNATED TARGET FROM ITS INTENDED FLIGHT PATH.
		COVERING	14	THE REFERENCE TN IS MAINTAINING A POSITION RELATIVE TO A DESIGNATED TARGET FROM WHICH A SUCCESSFUL INTERCEPT CAN TAKE EFFECT IF NEEDED.
		BATTLE DAMAGE ASSESSMENT UNKNOWN	15	THE REFERENCE TN HAS COMPLETED ITS MISSION AGAINST THE TARGET AND REPORTS AN UNKNOWN BATTLE DAMAGE ASSESSMENT.
769	002	TRACK NUMBER, REFERENCE -----		A REFERENCE NUMBER USED TO ASSOCIATE INFORMATION AND DIRECTIVES WITH THE TRACK.
				THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE-BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANNN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.

FIELD CODING FOR J12.6C1 (SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE	(CONTINUED)	

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6
00111	7
01000	A
01001	B
01010	C
01011	D
01100	E
01101	F
01110	G
01111	H
10000	J
10001	K
10010	L
10011	M
10100	N
10101	P
10110	Q
10111	R
11000	S
11001	T
11010	U
11011	V
11100	W
11101	X
11110	Y
11111	Z

00000	0	NO STATEMENT.
00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
00077	63	ILLEGAL.
00100-00175	64 THROUGH 125	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
00176	126	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
00177	127	COLLECTIVE ADDRESS.

FIELD CODING FOR J12.6C1

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		00200-07776	128 THROUGH 4094	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		07777 0A000-0Z777	4095 4096 THROUGH 16383	ILLEGAL. ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		10000-17777	16384 THROUGH 20479	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		20000-27777	32768 THROUGH 36863	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE

5.2-767

MIL-STD-6016B

FIELD CODING FOR J12.6C1

(SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		50000-57777	81920 THROUGH 86015	USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		70000-77776	114688 THROUGH 118782	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
815	001	MODE III IFF INTERROGATION -----		INDICATES THE RESULTS OF A MODE III INTERROGATION.
		NO STATEMENT	0	
		CORRECT	1	
		INCORRECT	2	
		NO RESPONSE	3	
298	001	MODE IV INDICATOR -----		THE MODE IV BEACON REPLY.

5.2-768

MIL-STD-6016B

FIELD CODING FOR J12.6C1

(SHEET 8)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
298	001	MODE IV INDICATOR -----	(CONTINUED)	
		NOT INTERROGATED/NO STATEMENT	0	
		INTERROGATED, NO RESPONSE	1	
		INTERROGATED, INVALID RESPONSE	2	
		INTERROGATED, VALID RESPONSE	3	
386	013	STRENGTH -----		EXPRESSES THE NUMBER OF ENTITIES REPRESENTED BY A SINGLE TRACK.
		NO STATEMENT	0	
		1 UNIT	1	
		2 UNITS	2	
		3 UNITS	3	
		4 UNITS	4	
		5 UNITS	5	
		6 UNITS	6	
		7 UNITS	7	
		8 UNITS	8	
		9 UNITS	9	
		10 UNITS	10	
		11 UNITS	11	
		12 UNITS	12	
		2 THROUGH 7 (FEW) UNITS	13	
		GREATER THAN 7 (MANY) UNITS	14	
		GREATER THAN 12 UNITS	15	

WORD MAP

WORD NUMBER: J12.6C2

WORD TITLE: FUSION TYPE CONTINUATION WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00		
<---		:	SECOND				:	MINUTE				:	TIME		:EOT	CONTINUATION WORD				:	WORD		:			
		:					:					:	INDICATOR		:RC	:	LABEL				:	FORMAT		:		
		:	6				:	6				:	3		: 1	:	5				:	2		:		
49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25		
<---					:	SPARE				:	JAMMER TYPE				:EMITTER	:					:	HUNDREDTHS				
					:					:					:STATUS	:	EMITTER PRF				:					
					:	5				:	3				: 3	:	3				:	7				
					:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50	
					:	:					:	INDEX NUMBER, THIRD				:										
					:FT	:	SENSOR TYPE				:	PARTY				:	TRACK NUMBER, INDEX ORIGINATOR									
					:	:					:					:										
					: 1	:	4				:	6				:	15									

WORD DESCRIPTION

WORD NUMBER: J12.6C2
WORD TITLE: FUSION TYPE CONTINUATION WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	00010
312 001	END OF TARGET REPORTING CYCLE (EOTRC)	7	1	
1681 004	TIME INDICATOR	8-	10 3	
797 004	MINUTE	11-	16 6	
380 001	SECOND	17-	22 6	
380 002	HUNDREDTHS	23-	29 7	
440 001	EMITTER PRF	30-	32 3	
342 001	EMITTER STATUS	33-	35 3	
1933 001	JAMMER TYPE	36-	38 3	
756 005	SPARE	39-	43 5	
769 042	TRACK NUMBER, INDEX ORIGINATOR	44-	58 15	
768 001	INDEX NUMBER, THIRD PARTY	59-	64 6	
1953 001	SENSOR TYPE	65-	68 4	
1301 001	FUSION TYPE (FT)	69	1	

FIELD CODING FOR J12.6C2

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
312	001	END OF TARGET REPORTING CYCLE -----		INDICATES ALL TARGETS HELD BY THE SENDING UNIT HAVE BEEN SENT.
		NO STATEMENT	0	
		THE TARGET IS THE LAST TARGET IN AN UPDATE SEQUENCE TO BE TRANSMITTED	1	INDICATES THAT THE TARGET IS THE LAST TARGET TO BE TRANSMITTED IN THE SENDER'S TARGET REPORTING CYCLE. THE NEXT TARGET TO BE TRANSMITTED WILL BE THE BEGINNING OF THE NEXT CYCLE. THIS INDICATES THAT A COMPLETE SET OF TARGETS HAS BEEN TRANSMITTED. THIS PROVIDES THE RECEIVER WITH AN INDICATION THAT ALL TARGETS HELD BY THE SENDING UNIT HAVE BEEN TRANSMITTED.
1681	004	TIME INDICATOR -----		USED IN CONJUNCTION WITH THE MINUTE, SECOND, AND HUNDREDTHS FIELDS TO DESCRIBE THEIR USE FOR TARGETING.
		NO STATEMENT	0	
		TIME OF OBSERVATION	1	THE TIME (MINUTE, SECOND, AND HUNDREDTHS FIELDS COLLECTIVELY) REPRESENTS THE TIME AT WHICH THE TARGET WAS ACTUALLY OBSERVED BY THE REPORTING UNIT. THE TIME IS REFERENCED TO NETWORK TIME.
		TIME OF EXTRAPOLATION	2	THE TIME (MINUTE, SECOND, AND HUNDREDTHS FIELDS COLLECTIVELY) REPRESENTS THE TIME TO WHICH THE REPORTING JU LAST EXTRAPOLATED THE TARGET. THE TIME IS REFERENCED TO NETWORK TIME, AND APPLIES TO ALL PARAMETERS EXCEPT LATITUDE AND LONGITUDE WHICH ARE EXTRAPOLATED TO TIME OF TRANSMISSION.
		TRACK AGE	3	THE TIME (MINUTE, SECOND, AND HUNDREDTHS FIELDS COLLECTIVELY) REPRESENTS THE LENGTH OF TIME THAT HAS PASSED SINCE TARGET WAS LAST EXTRAPOLATED. THIS FIELD VALUE IS ONLY USED WHEN NONE OF THE TARGET DATA IS EXTRAPOLATED BY THE SENDER UP TO THE TIME OF TRANSMISSION OF THE DATA. THIS TIME IS REFERENCED

5.2-772

MIL-STD-6016B

FIELD CODING FOR J12.6C2 (SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1681	004	TIME INDICATOR -----	(CONTINUED)	
		UNDEFINED GREATER THAN 1 HOUR	4 THROUGH 6 7	TO NETWORK TIME. MORE THAN AN HOUR HAS PASSED SINCE THE TARGET WAS LAST EXTRAPOLATED. DO NOT INTERPRET THE MINUTE, SECOND, OR HUNDREDTHS FIELDS.
797	004	MINUTE -----		THE MINUTE OF THE HOUR.
		0 THROUGH 59 ILLEGAL NO STATEMENT	0 THROUGH 59 60 THROUGH 62 63	IN ONE MINUTE INCREMENTS.
380	001	SECOND -----		THE SECOND OF THE MINUTE.
		0 THROUGH 59 ILLEGAL NO STATEMENT	0 THROUGH 59 60 THROUGH 62 63	IN ONE SECOND INCREMENTS.
380	002	HUNDREDTHS -----		HUNDREDTHS OF A SECOND.
		0 THROUGH 99 HUNDREDTHS ILLEGAL NO STATEMENT	0 THROUGH 99 100 THROUGH 126 127	IN HUNDREDTHS OF SECOND INCREMENTS.
440	001	EMITTER PRF -----		DEFINES THE PULSE REPETITION FREQUENCY OF THE TARGET EMITTER.
		NO STATEMENT	0	
		LOW (>0 <4 KHZ)	1	
		MEDIUM (>=4 <20 KHZ)	2	
		HIGH (>=20 <300 KHZ)	3	
		MISSILE COMPATIBLE (>=300 KHZ)	4	
		UNDEFINED	5 THROUGH 7	
342	001	EMITTER STATUS -----		REPORTS THE STATUS OF THE TARGET'S EMITTER.
		NO STATEMENT	0	
		INACTIVE	1	TARGET'S EMITTER IS INACTIVE OR NOT DETECTED.
		TARGET EMITTER ACTIVE	2	TARGET'S EMITTER IS ACTIVE. MODE NOT SPECIFIED.
		TARGET EMITTER IN SEARCH	3	TARGET EMITTER IN SEARCH MODE.

FIELD CODING FOR J12.6C2

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
342	001	EMITTER STATUS -----	(CONTINUED)	
		TARGET EMITTER IN TRACK	4	TARGET EMITTER IN TRACKING MODE.
		MISSILE LAUNCH	5	TARGET HAS LAUNCHED A MISSILE.
		UNDEFINED	6 THROUGH 7	
1933	001	JAMMER TYPE -----		SPECIFIES THE TYPE OF JAMMER BEING ENCOUNTERED. MAY BE USED IN CONJUNCTION WITH SENSOR TYPE.
		NO STATEMENT	0	
		VELOCITY DECEPTION	1	
		RANGE DECEPTION	2	
		NOISE JAMMING	3	
		ANGLE DECEPTION	4	
		UNDEFINED	5 THROUGH 7	
769	042	TRACK NUMBER, INDEX ORIGINATOR -----		THE TN OF THE UNIT ORIGINATING THE INDEX NUMBER, THIRD PARTY.
		NO STATEMENT	0	
		NUMERIC	00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		ILLEGAL NUMERIC	00077 (OCTAL) 00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC	00177 (OCTAL)	COLLECTIVE ADDRESS.
		NUMERIC	00200 THROUGH 07776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL NUMERIC	07777 (OCTAL) 10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
768	001	INDEX NUMBER, THIRD PARTY -----		THE INDEX NUMBER OF THE TARGET ASSIGNED BY THE INDEX ORIGINATOR.
		NO STATEMENT	0	
		NUMERIC	1 THROUGH 63	A VALUE ASSIGNED BY THE ORIGINATOR

FIELD CODING FOR J12.6C2

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
768	001	INDEX NUMBER, THIRD PARTY -----	(CONTINUED)	
				TO DIFFERENTIATE AMONG SENSOR TARGET REPORTS.
1953	001	SENSOR TYPE -----		IDENTIFIES THE TYPE OF SENSOR USED TO DETECT THE TARGET.
		NO STATEMENT	0	
		TELEVISION	1	
		INFRARED	2	
		ELECTRONIC WARFARE SUPPORT	3	
		JAM STROBE	4	
		VISUAL	5	
		RADAR	6	
		ANTI RADIATION MISSILE (ARM)	7	
		LASER DETECTOR/TRACKER	8	
		RADAR WARNING RECEIVER	9	
		SENSOR FUSION DATA (SENSOR NOT STATED)	10	
		PASSIVE RADAR	11	
		UNDEFINED	12 THROUGH 15	
1301	001	FUSION TYPE -----		INDICATES THE TYPE OF FUSION USED TO PRODUCE REPORTED SENSOR INFORMATION.
		SENSOR FUSION	0	INDICATES THAT SENSOR DATA REPORT IS A RESULT OF INFORMATION FROM ONBOARD SENSORS.
		DATA FUSION	1	INDICATES THAT SENSOR DATA REPORT IS A RESULT OF INFORMATION FROM ONBOARD SENSORS COMBINED WITH THAT RECEIVED FROM REMOTE SOURCES.

5.2-775

MIL-STD-6016B

WORD MAP

WORD NUMBER: J12.6C3

WORD TITLE: KINEMATIC QUALITY CONTINUATION WORD

24	23	22	21	20	19:	18	17	16	15:	14	13	12	11:	10	09	08	07:	06	05	04	03	02:	01	00:					
UNCERTAINTY ORIENTATION:					:	VERTICAL POSITION:			:	CROSS RANGE POSITION:			:	SLANT RANGE POSITION:			:	CONTINUATION WORD LABEL:			:	WORD FORMAT:		:					
					:	UNCERTAINTY			:	UNCERTAINTY			:	UNCERTAINTY			:				:			:					
11					:	4			:	4			:	4			:	5			:	2		:					
49	48	47	46	45	44	43	42	41:	40	39	38	37	36	35	34	33	32	31	30:	29	28	27	26	25					
VELOCITY, DOWN								:	UNCERTAINTY TILT											:	---								
								:												:									
13								:	11											:									
					:	69	68	67	66:	65	64	63	62:	61	60	59	58:	57	56	55	54:	53	52	51	50				
					:	SPARE				:	VELOCITY DOWN				:	VELOCITY EAST				:	VELOCITY NORTH				:	---			
					:					:	UNCERTAINTY				:	UNCERTAINTY				:	UNCERTAINTY				:				
					:					:					:					:					:				
					:	4				:	4				:	4				:	4				:				

WORD DESCRIPTION

WORD NUMBER: J12.6C3

WORD TITLE: KINEMATIC QUALITY CONTINUATION WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	00011
353 001	SLANT RANGE POSITION	7-	10 4	
	UNCERTAINTY			
353 002	CROSS RANGE POSITION	11-	14 4	
	UNCERTAINTY			
353 003	VERTICAL POSITION UNCERTAINTY	15-	18 4	
353 004	UNCERTAINTY ORIENTATION	19-	29 11	
353 005	UNCERTAINTY TILT	30-	40 11	
1401 006	VELOCITY, DOWN	41-	53 13	
353 007	VELOCITY NORTH UNCERTAINTY	54-	57 4	
353 008	VELOCITY EAST UNCERTAINTY	58-	61 4	
353 009	VELOCITY DOWN UNCERTAINTY	62-	65 4	
756 004	SPARE	66-	69 4	

FIELD CODING FOR J12.6C3 (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
353	001	SLANT RANGE POSITION UNCERTAINTY -----		PROVIDES AN ESTIMATE OF TARGET POSITION UNCERTAINTY ALONG THE MEASUREMENT AXIS DEFINED ALONG THE LINE BETWEEN THE OBSERVER POSITION AND THE TARGET POSITION. THE UNCERTAINTY SHALL BE CALCULATED AS THE ROOT-SUM-SQUARE OF THE MEAN OF TARGET MEASUREMENT ERROR, THE STANDARD DEVIATION OF THE TARGET MEASUREMENT ERROR, THE MEAN OF THE OBSERVER POSITION ERROR, AND THE STANDARD DEVIATION OF THE OBSERVER POSITION ERROR ALONG THE AXIS. THE MEAN SHALL REFLECT ALL KNOWN BIASES SUCH AS SENSOR BORESIGHTING ERRORS. THE STANDARD DEVIATION SHALL REFLECT ERRORS DUE TO MEASUREMENT NOISE. THE STANDARD DEVIATION DESCRIBES A 2 SIGMA REGION AROUND THE MEAN (-SIGMA TO SIGMA).
		NO STATEMENT	0	
		GREATER THAN 25000 FT	1	
		GREATER THAN 15712 THROUGH 25000 FT	2	
		GREATER THAN 9882 THROUGH 15712 FT	3	
		GREATER THAN 6214 THROUGH 9882 FT	4	
		GREATER THAN 3907 THROUGH 6214 FT	5	
		GREATER THAN 2456 THROUGH 3907 FT	6	
		GREATER THAN 1544 THROUGH 2456 FT	7	
		GREATER THAN 971 THROUGH 1544 FT	8	
		GREATER THAN 611 THROUGH 971 FT	9	
		GREATER THAN 384 THROUGH 611 FT	10	
		GREATER THAN 241 THROUGH 384 FT	11	
		GREATER THAN 152 THROUGH 241 FT	12	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
353	001	SLANT RANGE POSITION UNCERTAINTY ----- GREATER THAN 95 THROUGH 152 FT GREATER THAN 60 THROUGH 95 FT LESS THAN OR EQUAL TO 60 FT	(CONTINUED) 13 14 15	
353	002	CROSS RANGE POSITION UNCERTAINTY -----		PROVIDES AN ESTIMATE OF TARGET POSITION UNCERTAINTY ALONG THE MEASUREMENT AXIS DEFINED ALONG A HORIZONTAL AXIS PERPENDICULAR TO THE SLANT RANGE POSITION UNCERTAINTY AXIS. THE SLANT RANGE POSITION UNCERTAINTY AXIS AND THE CROSS RANGE POSITION UNCERTAINTY AXIS FORM A PLANE WITH A TILT FROM LOCAL LEVEL DESCRIBED BY THE UNCERTAINTY TILT FIELD. LOCAL LEVEL IS DEFINED AT THE LATITUDE AND LONGITUDE IN THE J12.6I WORD AND THE ALTITUDE IN THE J12.6E0 WORD. THE UNCERTAINTY SHALL BE CALCULATED AS THE ROOT-SUM-SQUARE OF THE MEAN TARGET MEASUREMENT ERROR, THE STANDARD DEVIATION OF THE TARGET MEASUREMENT ERROR, THE MEAN OF THE OBSERVER POSITION ERROR, AND THE STANDARD DEVIATION OF THE OBSERVER POSITION ERROR ALONG THE AXIS. THE MEAN SHALL REFLECT ALL KNOWN BIASES SUCH AS SENSOR BORESIGHTING ERRORS. THE STANDARD DEVIATION SHALL REFLECT ERRORS DUE TO MEASUREMENT NOISE. THE STANDARD DEVIATION DESCRIBES A 2 SIGMA REGION AROUND THE MEAN (-SIGMA TO SIGMA). THE MEASUREMENT AXES ALONG WHICH THE SLANT RANGE POSITION UNCERTAINTY AND VERTICAL POSITION UNCERTAINTY ARE DEFINED ARE MUTUALLY ORTHOGONAL.

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
353	002	CROSS RANGE POSITION UNCERTAINTY -----	(CONTINUED)	
		NO STATEMENT	0	
		GREATER THAN 25000 FT	1	
		GREATER THAN 15712 THROUGH 25000 FT	2	
		GREATER THAN 9882 THROUGH 15712 FT	3	
		GREATER THAN 6214 THROUGH 9882 FT	4	
		GREATER THAN 3907 THROUGH 6214 FT	5	
		GREATER THAN 2456 THROUGH 3907 FT	6	
		GREATER THAN 1544 THROUGH 2456 FT	7	
		GREATER THAN 971 THROUGH 1544 FT	8	
		GREATER THAN 611 THROUGH 971 FT	9	
		GREATER THAN 384 THROUGH 611 FT	10	
		GREATER THAN 241 THROUGH 384 FT	11	
		GREATER THAN 152 THROUGH 241 FT	12	
		GREATER THAN 95 THROUGH 152 FT	13	
		GREATER THAN 60 THROUGH 95 FT	14	
		LESS THAN OR EQUAL TO 60 FT	15	
353	003	VERTICAL POSITION UNCERTAINTY -----		PROVIDES AN ESTIMATE OF TARGET POSITION UNCERTAINTY ALONG THE MEASUREMENT AXIS DEFINED ALONG A VERTICAL AXIS PERPENDICULAR TO THE SLANT RANGE POSITION UNCERTAINTY AXIS. THE VERTICAL POSITION UNCERTAINTY AXIS AND THE SLANT RANGE POSITION UNCERTAINTY AXIS FORM A PLANE WITH AN ORIENTATION FROM TRUE NORTH DESCRIBED BY THE UNCERTAINTY

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
353	003	VERTICAL POSITION UNCERTAINTY -----	(CONTINUED)	

ORIENTATION FIELD. THE UNCERTAINTY SHALL BE CALCULATED AS THE ROOT-SUM-SQUARE OF THE MEAN TARGET MEASUREMENT ERROR, THE STANDARD DEVIATION OF THE TARGET MEASUREMENT ERROR, THE MEAN OF THE OBSERVER POSITION ERROR, AND THE STANDARD DEVIATION OF THE OBSERVER POSITION ERROR ALONG THIS AXIS. THE MEAN SHALL REFLECT ALL KNOWN BIASES SUCH AS SENSOR BORESIGHTING ERRORS. THE STANDARD DEVIATION SHALL REFLECT ERRORS DUE TO MEASUREMENT NOISE. THE STANDARD DEVIATION DESCRIBES A 2 SIGMA REGION AROUND THE MEAN (-SIGMA TO SIGMA). THE MEASUREMENT AXES ALONG WHICH THE SLANT RANGE POSITION UNCERTAINTY AND VERTICAL POSITION UNCERTAINTY ARE DEFINED ARE MUTUALLY ORTHOGONAL.

- | | |
|--|----|
| NO STATEMENT | 0 |
| GREATER THAN 25000 FT | 1 |
| GREATER THAN 15712
THROUGH 25000 FT | 2 |
| GREATER THAN 9882
THROUGH 15712 FT | 3 |
| GREATER THAN 6214
THROUGH 9882 FT | 4 |
| GREATER THAN 3907
THROUGH 6214 FT | 5 |
| GREATER THAN 2456
THROUGH 3907 FT | 6 |
| GREATER THAN 1544
THROUGH 2456 FT | 7 |
| GREATER THAN 971
THROUGH 1544 FT | 8 |
| GREATER THAN 611
THROUGH 971 FT | 9 |
| GREATER THAN 384
THROUGH 611 FT | 10 |
| GREATER THAN 241
THROUGH 384 FT | 11 |

FIELD CODING FOR J12.6C3

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
353	003	VERTICAL POSITION UNCERTAINTY ----- GREATER THAN 152 THROUGH 241 FT GREATER THAN 95 THROUGH 152 FT GREATER THAN 60 THROUGH 95 FT LESS THAN OR EQUAL TO 60 FT	(CONTINUED) 12 13 14 15	
353	004	UNCERTAINTY ORIENTATION ----- 0 DEGREES THROUGH 89.9121 DEGREES NO STATEMENT -89.9121 DEGREES THROUGH -0.08789 DEGREES	 0 THROUGH 1023 1024 1025 THROUGH 2047	THE ANGLE IN THE LOCAL LEVEL PLANE BETWEEN TRUE NORTH AND THE PROJECTION OF THE SLANT RANGE UNCERTAINTY AXIS ONTO THIS PLANE. LOCAL LEVEL IS DEFINED AT THE LATITUDE AND LONGITUDE IN THE J12.6I WORD AND THE ALTITUDE IN THE J12.6E0 WORD. A POSITIVE ANGLE IS MEASURED CLOCKWISE FROM TRUE NORTH. IN 0.08789 DEGREE INCREMENTS. IN 0.08789 DEGREE INCREMENTS.
353	005	UNCERTAINTY TILT ----- 0 DEGREES THROUGH 89.9121 DEGREES NO STATEMENT -89.9121 DEGREES THROUGH -0.08789 DEGREES	 0 THROUGH 1023 1024 1025 THROUGH 2047	THE ANGLE BETWEEN THE PROJECTION OF THE SLANT RANGE POSITION UNCERTAINTY AXIS ONTO THE LOCAL LEVEL PLANE AND THE SLANT RANGE POSITION UNCERTAINTY AXIS. LOCAL LEVEL IS DEFINED AT THE LATITUDE AND LONGITUDE IN THE J12.6I WORD AND THE ALTITUDE IN THE J12.6E0 WORD. A POSITIVE ANGLE IS MEASURED COUNTER-CLOCKWISE FROM LOCAL LEVEL. IN 0.08789 DEGREE INCREMENTS. IN 0.08789 DEGREE INCREMENTS.

5.2-782

MIL-STD-6016B

FIELD CODING FOR J12.6C3

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1401	006	VELOCITY, DOWN -----		PROVIDES THE DOWN COMPONENT OF THE TARGET'S VELOCITY REFERENCED TO THE HORIZON. BELOW THE HORIZON IS POSITIVE.
		0 THROUGH 4095 FEET PER SECOND	0 THROUGH 4095	IN 1 FT/SEC INCREMENTS.
		NO STATEMENT	4096	
		-4095 THROUGH -1 FEET PER SECOND	4097 THROUGH 8191	IN 1 FT/SEC INCREMENTS.
353	007	VELOCITY NORTH UNCERTAINTY -----		PROVIDES THE ESTIMATED VELOCITY NORTH UNCERTAINTY VALUE. THE UNCERTAINTY SHALL BE CALCULATED AS THE ROOT-SUM-SQUARE OF THE MEAN AND STANDARD DEVIATION OF THE NORTH VELOCITY ERROR ESTIMATE. THE MEAN SHALL REFLECT ALL KNOWN BIASES SUCH AS SENSOR BORESIGHTING ERRORS. THE STANDARD DEVIATION SHALL REFLECT ERRORS DUE TO MEASUREMENT NOISE. THE STANDARD DEVIATION (SIGMA) DESCRIBES A 2 SIGMA REGION (-SIGMA TO SIGMA) AROUND THE MEAN.
		NO STATEMENT	0	
		GREATER THAN 250.00 FT/SEC	1	
		GREATER THAN 163.5 FT/SEC THROUGH 250 FT/SEC	2	
		GREATER THAN 106.9 FT/SEC THROUGH 163.5 FT/SEC	3	
		GREATER THAN 69.9 FT/SEC THROUGH 106.9 FT/SEC	4	
		GREATER THAN 45.7 FT/SEC THROUGH 69.9 FT/SEC	5	
		GREATER THAN 29.9 FT/SEC THROUGH 45.7 FT/SEC	6	
		GREATER THAN 19.5 FT/SEC THROUGH 29.9 FT/SEC	7	
		GREATER THAN 12.8 FT/SEC THROUGH 19.5 FT/SEC	8	
		GREATER THAN 8.4 FT/SEC THROUGH 12.8 FT/SEC	9	

FIELD CODING FOR J12.6C3

(SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

353	007	VELOCITY NORTH UNCERTAINTY	(CONTINUED)	
-----	-----	----------------------------	-------------	--

		GREATER THAN 5.5 FT/SEC	10
		THROUGH 8.4 FT/SEC	
		GREATER THAN 3.6 FT/SEC	11
		THROUGH 5.5 FT/SEC	
		GREATER THAN 2.3 FT/SEC	12
		THROUGH 3.6 FT/SEC	
		GREATER THAN 1.5 FT/SEC	13
		THROUGH 2.3 FT/SEC	
		GREATER THAN 1 FT/SEC	14
		THROUGH 1.5 FT/SEC	
		LESS THAN OR EQUAL TO	15
		1 FT/SEC	

353	008	VELOCITY EAST UNCERTAINTY		
-----	-----	---------------------------	--	--

--	--	-------	--

PROVIDE THE ESTIMATED VELOCITY EAST UNCERTAINTY VALUE. THE UNCERTAINTY SHALL BE CALCULATED AS THE ROOT-SUM-SQUARE OF THE MEAN AND STANDARD DEVIATION OF THE EAST VELOCITY ERROR ESTIMATE. THE MEAN SHALL REFLECT ALL KNOWN BIASES SUCH AS SENSOR BORESIGHTING ERRORS. THE STANDARD DEVIATION SHALL REFLECT ERRORS DUE TO MEASUREMENT NOISE. THE STANDARD DEVIATION (SIGMA) DESCRIBES A 2 SIGMA REGION (-SIGMA TO SIGMA) AROUND THE MEAN.

		NO STATEMENT	0
		GREATER THAN 250.00	1
		FT/SEC	
		GREATER THAN 163.5	2
		FT/SEC THROUGH 250	
		FT/SEC	
		GREATER THAN 106.9	3
		FT/SEC THROUGH 163.5	
		FT/SEC	
		GREATER THAN 69.9 FT/SEC	4
		THROUGH 106.9 FT/SEC	
		GREATER THAN 45.7 FT/SEC	5
		THROUGH 69.9 FT/SEC	
		GREATER THAN 29.9 FT/SEC	6
		THROUGH 45.7 FT/SEC	

5.2-784

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
353	008	VELOCITY EAST UNCERTAINTY -----	(CONTINUED)	
		GREATER THAN 19.5 FT/SEC	7	
		THROUGH 29.9 FT/SEC		
		GREATER THAN 12.8 FT/SEC	8	
		THROUGH 19.5 FT/SEC		
		GREATER THAN 8.4 FT/SEC	9	
		THROUGH 12.8 FT/SEC		
		GREATER THAN 5.5 FT/SEC	10	
		THROUGH 8.4 FT/SEC		
		GREATER THAN 3.6 FT/SEC	11	
		THROUGH 5.5 FT/SEC		
		GREATER THAN 2.3 FT/SEC	12	
		THROUGH 3.6 FT/SEC		
		GREATER THAN 1.5 FT/SEC	13	
		THROUGH 2.3 FT/SEC		
		GREATER THAN 1 FT/SEC	14	
		THROUGH 1.5 FT/SEC		
		LESS THAN OR EQUAL TO	15	
		1 FT/SEC		
353	009	VELOCITY DOWN UNCERTAINTY -----		PROVIDES THE ESTIMATED VELOCITY DOWN UNCERTAINTY VALUE. THE UNCERTAINTY SHALL BE CALCULATED AS THE ROOT-SUM-SQUARE OF THE MEAN AND STANDARD DEVIATION OF THE DOWN VELOCITY ERROR ESTIMATE. THE MEAN SHALL REFLECT ALL KNOWN BIASES SUCH AS SENSOR BORESIGHTING ERRORS. THE STANDARD DEVIATION SHALL REFLECT ERRORS DUE TO MEASUREMENT NOISE. THE STANDARD DEVIATION (SIGMA) DESCRIBES A 2 SIGMA REGION (-SIGMA TO SIGMA) AROUND THE MEAN.
		NO STATEMENT	0	
		GREATER THAN 250.00	1	
		FT/SEC		
		GREATER THAN 163.5	2	
		FT/SEC THROUGH 250		
		FT/SEC		
		GREATER THAN 106.9	3	
		FT/SEC THROUGH 163.5		
		FT/SEC		

5.2-785

MIL-STD-6016B

FIELD CODING FOR J12.6C3 (SHEET 9)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
353	009	VELOCITY DOWN UNCERTAINTY	(CONTINUED)	

		GREATER THAN 69.9 FT/SEC	4	
		THROUGH 106.9 FT/SEC		
		GREATER THAN 45.7 FT/SEC	5	
		THROUGH 69.9 FT/SEC		
		GREATER THAN 29.9 FT/SEC	6	
		THROUGH 45.7 FT/SEC		
		GREATER THAN 19.5 FT/SEC	7	
		THROUGH 29.9 FT/SEC		
		GREATER THAN 12.8 FT/SEC	8	
		THROUGH 19.5 FT/SEC		
		GREATER THAN 8.4 FT/SEC	9	
		THROUGH 12.8 FT/SEC		
		GREATER THAN 5.5 FT/SEC	10	
		THROUGH 8.4 FT/SEC		
		GREATER THAN 3.6 FT/SEC	11	
		THROUGH 5.5 FT/SEC		
		GREATER THAN 2.3 FT/SEC	12	
		THROUGH 3.6 FT/SEC		
		GREATER THAN 1.5 FT/SEC	13	
		THROUGH 2.3 FT/SEC		
		GREATER THAN 1 FT/SEC	14	
		THROUGH 1.5 FT/SEC		
		LESS THAN OR EQUAL TO	15	
		1 FT/SEC		

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: IDENTITY/SPECIFIC TYPE AMBIGUITY CONTINUATION WORD

:	24	23	22	21	20	19	18	17	16:	15	14	13	12	11	10	09	08	07:	06	05	04	03	02:	01	00:				
:	PROBABILITY OF ENEMY FORCES									:	PROBABILITY OF OWN FORCES									:	CONTINUATION WORD LABEL					:	WORD FORMAT		:
:										:										:						:			:
:	9									:	9									:	5					:	2		:

49:	48	47	46	45	44	43	42	41	40	39	38	37:	36	35	34	33	32	31	30	29	28	27	26	25:
:	SPACE AMBIGUOUS TYPE 2											:	SPACE AMBIGUOUS TYPE 1											:
:	AIR AMBIGUOUS TYPE 2											:	AIR AMBIGUOUS TYPE 1											:
:	SURFACE (MARITIME) AMBIGUOUS TYPE 2											:	SURFACE (MARITIME) AMBIGUOUS TYPE 1											:
<---	SUBSURFACE (MARITIME) AMBIGUOUS TYPE 2											:	SUBSURFACE (MARITIME) AMBIGUOUS TYPE 1											:
:	LAND (GROUND) AMBIGUOUS TYPE 2											:	LAND (GROUND) AMBIGUOUS TYPE 1											:
:	SPARE											:	SPARE											:
:	12											:	12											:

:	69	68	67:	66	65	64	63	62	61	60	59	58:	57	56	55	54	53	52	51	50		
:	SPARE			:	AMBIGUOUS TYPE 2 PROBABILITY									:	AMBIGUOUS TYPE 1 PROBABILITY							
:				:										:								
:	3			:	9									:	9							

WORD DESCRIPTION

WORD NUMBER: J12.6C4

WORD TITLE: IDENTITY/SPECIFIC TYPE AMBIGUITY CONTINUATION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	01
1551	001	CONTINUATION WORD LABEL	2-	6 5	00100
369	001	PROBABILITY OF OWN FORCES	7-	15 9	
369	002	PROBABILITY OF ENEMY FORCES	16-	24 9	
749	001	SPACE AMBIGUOUS TYPE 1	25-	36 12	
804	002	AIR AMBIGUOUS TYPE 1	25-	36 12	
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	25-	36 12	
809	002	SUBSURFACE (MARITIME) AMBIGUOUS TYPE 1	25-	36 12	
810	002	LAND (GROUND) AMBIGUOUS TYPE 1	25-	36 12	
756	012	SPARE	25-	36 12	
749	003	SPACE AMBIGUOUS TYPE 2	37-	48 12	
804	003	AIR AMBIGUOUS TYPE 2	37-	48 12	
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	37-	48 12	
809	003	SUBSURFACE (MARITIME) AMBIGUOUS TYPE 2	37-	48 12	
810	003	LAND (GROUND) AMBIGUOUS TYPE 2	37-	48 12	
756	012	SPARE	37-	48 12	
369	003	AMBIGUOUS TYPE 1 PROBABILITY	49-	57 9	
369	004	AMBIGUOUS TYPE 2 PROBABILITY	58-	66 9	
756	003	SPARE	67-	69 3	

FIELD CODING FOR J12.6C4

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
369	001	PROBABILITY OF OWN FORCES ----- 0 THROUGH 1 NO STATEMENT	0 THROUGH 510 511	EXPRESSES THE PROBABILITY THAT THE TARGET BELONGS TO OWN FORCES. THE PROBABILITY SHALL REFLECT BOTH THE CONFIDENCE IN THE IDENTIFICATION SOURCES AND THE CONFIDENCE THAT THE IDENTITY INFORMATION IS CORRECTLY CORRELATED TO THIS TARGET. INFORMATION IN THIS FIELD SHALL BE DERIVED ONLY FROM ONBOARD SOURCES AS OPPOSED TO DATA LINK SOURCES. 100 - (PROBABILITY OF OWN FORCES + PROBABILITY OF ENEMY FORCES) = PROBABILITY OF NONALIGNED FORCES. IN 0.00196 INCREMENTS.
369	002	PROBABILITY OF ENEMY FORCES ----- 0 THROUGH 1 NO STATEMENT	0 THROUGH 510 511	EXPRESSES THE PROBABILITY THAT THE TARGET BELONGS TO ENEMY FORCES. THE PROBABILITY SHALL REFLECT BOTH THE CONFIDENCE IN THE IDENTIFICATION SOURCES AND THE CONFIDENCE THAT THE IDENTITY INFORMATION IS CORRECTLY CORRELATED TO THIS TARGET. INFORMATION IN THIS FIELD SHALL BE DERIVED ONLY FROM ONBOARD SOURCES AS OPPOSED TO DATA LINK SOURCES. 100 - (PROBABILITY OF OWN FORCES + PROBABILITY OF ENEMY FORCES) = PROBABILITY OF NONALIGNED FORCES. IN 0.00196 INCREMENTS.
749	001	SPACE AMBIGUOUS TYPE 1 -----		IDENTIFIES THE TARGET SPECIFIC TYPE AS DETERMINED BY AN ONBOARD CORRELATION PROCESS IF THERE ARE NO AMBIGUITIES. IDENTIFIES THE MOST PROBABLE TARGET SPECIFIC TYPE IF AN ONBOARD CORRELATION PROCESS DETERMINES THAT THE SPECIFIC TYPE IS AMBIGUOUS. INFORMATION IN THIS FIELD SHALL

5.2-790

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
749	001	SPACE AMBIGUOUS TYPE 1 -----	(CONTINUED)	

BE DERIVED ONLY FROM ONBOARD
SOURCES AS OPPOSED TO DATA LINK
SOURCES.

NO STATEMENT	0
FROG-7	1
HONEST JOHN	2
SAKR 80	3
SS-21 MOD 2	4
SS-21 MOD 3	5
HAFT-I	6
UNDEFINED	7 THROUGH 78
SHORT RANGE (0-65 DM)	79
ALACRAN	80
CHENG FENG	81
CONDOR	82
HAFT II	83
IRAN-130	84
LANCE	85
MB/EE-150	86
MB/EE-300	87
UNDEFINED	88
PRITHVI	89
SS-1B (SCUD-A)	90
SS-1C (SCUD-B)	91
SS-21 (SCARAB)	92
SS-300	93
B-610/CJS-98 (BG510)	94
NHK-I	95
NHK-II (HYON MU)	96
UNDEFINED	97 THROUGH 168
SHORT-MEDIUM RANGE (66-200 DM)	169
AL-HUSAYN	170
UNDEFINED	171
HAFT III	172
M-9	173
M-11	174
MB/EE-600	175
SCUD-C	176
SS-23 (SPIDER)	177
AL HUSSEIN	178
UNDEFINED	179 THROUGH 242

5.2-791

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
749	001	SPACE AMBIGUOUS TYPE 1	(CONTINUED)	

		MEDIUM RANGE (201-400 DM)	243	
		AL-ABBAS	244	
		JERICH0-I	245	
		AL HIJARAN	246	
		SONDA IV	247	
		UNDEFINED	248 THROUGH 330	
		MEDIUM-EXTENDED RANGE (401-600 DM)	331	
		AL-FATAH	332	
		BADR-2000	333	
		CONDOR II	334	
		CSS-1	335	
		MB/EE-1000	336	
		SKY HORSE	337	
		SS-12A (SCALEBOARD A)	338	
		SS-12B (SCALEBOARD B)	339	
		SS1000	340	
		TIEN MA	341	
		UNDEFINED	342 THROUGH 416	
		EXTENDED RANGE (601-800 DM)	417	
		ARNISTON	418	
		CAPRICORNIO	419	
		JERICH0 II	420	
		NODONG-1	421	
		SS-N-5 (SERB)	422	
		UNDEFINED	423 THROUGH 496	
		EXTENDED-LONG RANGE (801-1000 DM)	497	
		AGNI	498	
		AL/ABED	499	
		CC-4 (SANDAL)	500	
		CSS-5	501	
		UNDEFINED	502 THROUGH 575	
		LONG RANGE (1001-1350 DM)	576	
		CHEVALINE	577	
		CSS-2	578	
		CSS-3	579	
		CSS-4	580	
		CSS-N-3	581	
		M-4 SLBM	582	

FIELD CODING FOR J12.6C4

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
749	001	SPACE AMBIGUOUS TYPE 1	(CONTINUED)	

		M-5 SLBM	583	
		M-20 SLBM	584	
		MIDGETMAN	585	
		MINUTEMAN I	586	
		MINUTEMAN II	587	
		PEACEKEEPER	588	
		POLARIS A-3	589	
		POSEIDON C-3	590	
		SS-11 (SEGO)	591	
		SS-13 (SAVAGE)	592	
		SS-17 (SPANKER) MOD 1	593	
		SS-17 (SPANKER) MOD 2	594	
		SS-17 (SPANKER) MOD 3	595	
		SS-18 (SATAN) MOD 1	596	
		SS-18 (SATAN) MOD 2	597	
		SS-18 (SATAN) MOD 3	598	
		SS-20 (SABER)	599	
		SS-24 (SCALPEL)	600	
		SS-25 (SICKLE)	601	
		SS-N-6 (SAWFLY)	602	
		SS-N-8	603	
		SS-N-17 (SNIPE)	604	
		SS-N-18 (STINGRAY)	605	
		SS-N-20 (STURGEON)	606	
		SS-N-23 (SKIFF)	607	
		SSBS S-3	608	
		SSBS S-4	609	
		TRIDENT I (C-4)	610	
		TRIDENT II (D-5)	611	
		MODIFIED CSS-5	612	
		SS-19 MOD 3	613	
		UNDEFINED	614	
		NEW SOLID SLBM	615	
		CSS-NX-3	616	
		M4B	617	
		M45	618	
		UNDEFINED	619 THROUGH 786	
		>1350 DM	787	
		ABM-1B (GALOSH)	788	
		ARROW	789	
		ASTER	790	
		CORPS SAM	791	
		ERINT	792	

5.2-793

MIL-STD-6016B

DFI DUI DUI/DI NAME DI BIT CODE DUI/DI EXPLANATION

749	001	SPACE AMBIGUOUS TYPE 1 -----	(CONTINUED)
		HAWK	793
		PATRIOT	794
		SA-10 (GRUMBLE)	795
		SA-12A (GLADIATOR)	796
		SA-12B (GIANT)	797
		SA-N-6 (GRUMBLE)	798
		SH-08 (GAZELLE)	799
		STANDARD MISSILE BLOCK	800
		IVA	
		THAAD	801
		SM-2 BLOCK IV	802
		SM-3 LEAP	803
		UNDEFINED	804 THROUGH 876
		INTERCEPTOR	877
		OPERATIONAL COMMANDER	878 THROUGH 941
		DEFINED 1-64	
		UNDEFINED	942 THROUGH 1022
		BALLISTIC MISSILE	1023
		GENERAL	
		UNDEFINED	1024 THROUGH 2046
		SPACE GENERAL	2047
		UNDEFINED	2048 THROUGH 4093
		RESET TO NO STATEMENT	4094
		UNDEFINED	4095

804	002	AIR AMBIGUOUS TYPE 1 -----	IDENTIFIES THE TARGET SPECIFIC TYPE AS DETERMINED BY AN ONBOARD CORRELATION PROCESS IF THERE ARE NO AMBIGUITIES. IDENTIFIES THE MOST PROBABLE TARGET SPECIFIC TYPE IF AN ONBOARD CORRELATION PROCESS DETERMINED THAT THE SPECIFIC TYPE IS AMBIGUOUS. INFORMATION IN THIS FIELD SHALL BE DERIVED ONLY FROM ONBOARD SOURCES AS OPPOSED TO DATA LINK SOURCES.
		NO STATEMENT	0
		----- FIGHTER -----	

FIELD CODING FOR J12.6C4

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1	(CONTINUED)	

		F-4 PHANTOM II	1	
		F-5 TIGER II	2	
		F-8 CRUSADER	3	
		F-14 TOMCAT	4	
		F-15 EAGLE	5	
		F-16 FIGHTING FALCON	6	
		F-101 VOODOO	7	
		F-104 STARFIGHTER	8	
		F-105 THUNDERCHIEF	9	
		F-106 DELTA DART	10	
		F-111 (GENERAL DYNAMICS)	11	
		F/A-18 HORNET	12	
		EFA	13	
		F-102	14	
		F-100	15	
		DISUSED	16	
		DISUSED	17	
		COMMANDO	18	
		DISUSED	19	
		DISUSED	20	
		J-35 DRAKEN	21	
		JAGUAR	22	
		SUPER ETENDARD	23	
		DISUSED	24	THROUGH 26
		F-1 (MITSUBISHI)	27	
		F-35XD DRAKEN	28	
		DISUSED	29	
		HF-24 MARUT (WIND SPIRIT)	30	
		JA37 VIGGEN	31	
		DISUSED	32	
		SF-5 FREEDOM FIGHTER	33	
		IAR-91 ORAO	34	
		AJEET INVINCIBLE	35	
		KFIR C2	36	
		MIRAGE F1	37	
		MIRAGE 3	38	
		MIRAGE 5	39	
		MIRAGE 50	40	
		MIRAGE 2000	41	
		DISUSED	42	
		DISUSED	43	
		ALPHA JET	44	

5.2-795

MIL-STD-6016B

FIELD CODING FOR J12.6C4 (SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1 -----	(CONTINUED)	
		KEFIR	45	
		F-6 FARMER	46	
		F-8 FISHBED	47	
		F-9 FANTAN	48	
		F-12 (CHINA)	49	
		SU-7 FITTER	50	
		SU-9 FISHPOT	51	
		SU-11 FLAGON	52	
		SU-15 FLAGON	53	
		SU-17 FITTER	54	
		SU-19 FENCER	55	
		SU-20 FITTER	56	
		SU-22 FITTER	57	
		SU-24 FENCER	58	
		SU-25 FROGFOOT	59	
		TU-28 FIDDLER	60	
		TU-128 FIDDLER	61	
		MIG-21 FISHBED	62	
		MIG-23 FLOGGER	63	
		MIG-25 FOXBAT	64	
		MIG-27 FLOGGER	65	
		YAK-28 FIREBAR	66	
		YAK-36 FORGER	67	
		AAF "RAM-J"	68	
		MIG-15 FAGOT	69	
		MIG-17 FRESCO	70	
		MIG-19 FARMER	71	
		SU-27 FLANKER	72	
		MIG-29 FULCRUM	73	
		MIG-31 FOXHOUND	74	
		YAK-38 FORGER-A	75	
		F-22 RAPTOR	76	
		F-84 THUNDERSTREAK	77	
		F-86 SABRE	78	
		F/A2 SEA HARRIER	79	
		IDF CHING-KUO (TAIWAN)	80	
		JAS-39 GRIPPEN	81	
		JIAN JI-7	82	
		JIAN JI-8-2	83	
		JOINT STRIKE FIGHTER	84	
		KFIR C7	85	
		KFIR 2000	86	
		RAFALE	87	

FIELD CODING FOR J12.6C4

(SHEET 8)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1	(CONTINUED)	

		SU-30	88	
		SU-33 (SU-27K)	89	
		SU-34	90	
		SU-35	91	
		SU-37	92	
		SU-39	93	
		YAK-141 FREESTYLE	94	
		F-5 FRESCO	95	
		F-7 FISHBED	96	
		J-9	97	
		RT33	98	
		CF-188 HORNET	99	
		UNDEFINED	100	
		TORNADO F3	101	
		SEA HARRIER	102	
		F-5 NORTHROP	103	
		UNDEFINED	104 THROUGH 254	
		FIGHTER GENERAL	255	

		BOMBERS/ATTACK		

		A-4 SKYHAWK	256	
		A-6 INTRUDER	257	
		A-7 CORSAIR II	258	
		A-10 THUNDERBOLT II	259	
		A-37 DRAGONFLY	260	
		B-1 (ROCKWELL)	261	
		B-52 STRATOFORTRESS	262	
		AC-130 HERCULES	263	
		AV-8 HARRIER	264	
		F/A-18 HORNET	265	
		FB-111 (GENERAL DYNAMICS)	266	
		A-1	267	
		TA-28	268	
		DISUSED	269	
		AC-47	270	
		AC-119	271	
		AC-124	272	
		ALPHA JET	273	
		DISUSED	274 THROUGH 276	

5.2-797

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 9)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1	(CONTINUED)	

		35XD DRAGEN	277	
		J-1 HAWK	278	
		J-1 JAESTREB	279	
		S-2	280	
		AJ37 VIGGEN	281	
		HA220 SUPER SAETA	282	
		M.B.326 (AERMACCHI)	283	
		M.B.339 (AERMACCHI)	284	
		SF 260 WARRIER	285	
		SK 60 (SAAB)	286	
		BAC 167 STRIKEMASTER	287	
		TORNADO GR-1 (IDS)	288	
		IL-28 BEAGLE	289	
		MI-4 BISON	290	
		TU-16 BADGER	291	
		TU-22 BLINDER	292	
		TU-22M BACKFIRE	293	
		TU-95 BEAR	294	
		TU-142 BEAR	295	
		YAK-28 BREWER	296	
		SUPER ENTENDARD	297	
		TU-160 BLACKJACK	298	
		AMX	299	
		FRS1 SEA HARRIER	300	
		FRS2 SEA HARRIER	301	
		FRS51 SEA HARRIER	302	
		F-117 NIGHTHAWK	303	
		G4 SUPER GALEB	304	
		G91Y	305	
		HAWK-2000	306	
		HAWK-100	307	
		HAWK-200	308	
		HAWK-50	309	
		HAWK-60	310	
		IA-58 PUCARA	311	
		IAR-93 ORAO	312	
		IAR-99 SOIM	313	
		JIAN JI-5M	314	
		A-5 FANTAN	315	
		L59 ALBATROS	316	
		B-2 SPIRIT	317	
		B-7 HONGZHA	318	
		1050E	319	

FIELD CODING FOR J12.6C4 (SHEET 10)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1	(CONTINUED)	

		A3 LEI MING	320	
		HARRIER GR4/7	321	
		TORNADO GR4	322	
		AV-8B HARRIER PLUS	323	
		CF-188 HORNET	324	
		RAFALE	325	
		UNDEFINED	326 THROUGH 510	
		BOMBER/ATTACK GENERAL	511	

		PATROL/RECON/ELECTRONIC/ TANKER/GENERAL		

		E-2 HAWKEYE	512	
		E-3 SENTRY (AWACS)	513	
		E-4 NEACP	514	
		EA-3	515	
		EA-6 PROWLER	516	
		EB-57 (DOUGLAS)	517	
		EC-130 HERCULES	518	
		EC-135 (BOEING)	519	
		EF-4 WILD WEASEL	520	
		EF-111 (GENERAL DYNAMICS)	521	
		EP-3 ORION	522	
		KA-3 (DOUGLAS)	523	
		KA-6 (GRUMMAN)	524	
		KC-10 EXTENDER	525	
		KC-130 HERCULES	526	
		KC-135 STRATOTANKER	527	
		O-1 BIRD DOG	528	
		O-2 (CESSNA)	529	
		OV-1 MOHAWK	530	
		OV-10 BRONCO	531	
		P-2 NEPTUNE	532	
		P-3 ORION	533	
		RC-130 HERCULES	534	
		RC-135 (BOEING)	535	
		RF-4 PHANTOM II	536	
		RF-5 (NORTHROP)	537	
		RF-8 CRUSADER	538	
		RF-14 TOMCAT	539	

FIELD CODING FOR J12.6C4

(SHEET 11)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1	(CONTINUED)	

		RF-104 STARFIGHTER	540	
		RP-3 ORION	541	
		RU-21 UTE	542	
		S-2 TRACKER	543	
		S-3 VIKING	544	
		SR-71 BLACKBIRD	545	
		U-2 (LOCKHEED)	546	
		U-4 AERO COMMANDER	547	
		U-5 H-500 TWIN	548	
		U-8 SEMINOLE	549	
		U-10 COURIER	550	
		UC-12 HURON	551	
		U-21 UTE	552	
		US-3 VIKING	553	
		OA-37 DRAGONFLY	554	
		TR-1	555	
		WC-130 HERCULES	556	
		E-1 TRACER	557	
		EB-66	558	
		EC-121	559	
		RA-3	560	
		SEA SCAN	561	
		FALCON 20 GUARDIAN	562	
		BR 1150 ATL1	563	
		RF-35XD DRAKEN	564	
		BN-2 MARITIME DEFENDER	565	
		DISUSED	566 THROUGH 567	
		CP-140 AURORA	568	
		HS.748 COASTGUARDER	569	
		HS.801 NIMROD	570	
		DISUSED	571	
		MK.3	572	
		RJ-1 HAWK	573	
		RJ-1 JAESTREB	574	
		SS-2	575	
		PEACE SENTINEL	576	
		KC-97	577	
		AU-24	578	
		AU-23	579	
		U-21	580	
		U-17	581	
		HU-16	582	
		U-9	583	

FIELD CODING FOR J12.6C4

(SHEET 12)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1	(CONTINUED)	

		U-3	584	
		RU-21	585	
		NKC-135	586	
		RF-101	587	
		RF-111	588	
		RB-57	589	
		RB-66	590	
		RC-121	591	
		BE-12 MAIL	592	
		IL-38 MAY	593	
		TU-126 MOSS	594	
		BE-6	595	
		VC-10 (TANKER)	596	
		AN-12 CUB-A (ELINT)	597	
		AN-12 CUB-C (EA)	598	
		AN-12 CUB-D (EA)	599	
		IL-20 COOT-A (ELINT)	600	
		IL-76 MAINSTAY	601	
		E-8 (J STARS)	602	
		TORNADO ECR	603	
		E-6 MERCURY	604	
		EMB-111	605	
		MU-2S	606	
		A40 ALBATROS	607	
		BE42 ALBATROS	608	
		CL215 AMPHIBIAN	609	
		IAI 1125	610	
		IL22 COOT B	611	
		J32 LANSEN	612	
		SH5 HARBIN	613	
		TIER1	614	
		TIER2	615	
		TIER3	616	
		US1 (SHIN)	617	
		C-212 CASA	618	
		CESSNA 550 CITATION II	619	
		CESSNA 560 CITATION V	620	
		CL 215 CANADAIR	621	
		DORNIER 27	622	
		F-27 FOKKER	623	
		NIMROD MRA4	624	
		CP-140A AURORA/ARCTURUS	625	
		RC-135 RIVET JOINT	626	

FIELD CODING FOR J12.6C4

(SHEET 13)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1	(CONTINUED)	

		ATL 2	627	
		ETENDARD IV P	628	
		ALIZE	629	
		FALCON 50	630	
		MIRAGE IV	631	
		MIRAGE 2000	632	
		BR 1150 GE ATL ASW	633	
		BR 1150 GE ATL SIGINT	634	
		C-130 HERCULES TANKER	635	
		ASTOR	636	
		UNDEFINED	637 THROUGH 761	
		TANKER	762	
		RECONNAISSANCE (RECON)	763	
		ELECTRONIC WARFARE (EW)	764	
		ASW	765	
		AEW AND C	766	
		MISCELLANEOUS GENERAL	767	

		TRAINER		

		T-2 BUCKEYE	768	
		T-28 TROJAN	769	
		T-29 (CONVAIR)	770	
		T-34 MENTOR	771	
		T-37 TWEET	772	
		T-38 TALON	773	
		T-39 SABERLINER	774	
		T-41 MESCALERO	775	
		T-42 CONCHISE	776	
		T-43 (BOEING)	777	
		T-44 KING AIR	778	
		TA-4 SKYHAWK	779	
		TA-7 CORSAIR II	780	
		T-33	781	
		ALPHA JET	782	
		B3LA (SAAB)	783	
		C-101 AVIOJET	784	
		G2-A GALEB	785	
		G2-A SEAGULL	786	
		L-29 DELFIN	787	
		L-29 MAYA	788	

5.2-802

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 14)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1	(CONTINUED)	

		L-39 ALBATROS	789	
		L-70 MILTRAINER	790	
		L-450	791	
		P.55 (PARTENAVIA)	792	
		T-2 (MITSUBISHI)	793	
		CM 170 MAGISTER	794	
		M.B.339 (AERMACCHI)	795	
		T-2 (MITSUBISHI)	796	
		CM AU/ MAGISTER	797	
		M.B.339 (AERMACCHI)	798	
		SF-260 (SIAI-MARCHETTI)	799	
		SH 37 VIGGEN	800	
		QH-50 DRAKEN	801	
		SK 37 VIGGEN	802	
		SK 60 (SAAB)	803	
		TB30 EPSILON	804	
		TF-35XD	805	
		TJ-1 HAWK	806	
		TJ-1 JASTRAEB	807	
		TS.11 SPARK	808	
		AW1-2 FAN TRAINER	809	
		DISUSED	810	
		HJT-16 KIRAN	811	
		MBB223 FLAMINGO	812	
		SU-11 MAIDEN	813	
		SU-15	814	
		MIG-15 MIDGET	815	
		MIG-17	816	
		MIG-21 MONGOL	817	
		MIG-23	818	
		MIG-25	819	
		YAK-11 MOOSE	820	
		YAK-18 MAX	821	
		YAK-28 MAESTRO	822	
		TF-104 STARFIGHTER	823	
		T-46A	824	
		EMB-312 TOUCAN	825	
		T-45 GOSHAWK	826	
		T-47	827	
		AS202	828	
		CT114 TUTOR	829	
		G91T (FIAT JET 1)	830	
		K8 (NAMC)	831	

5.2-803

MIL-STD-6016B

FIELD CODING FOR J12.6C4 (SHEET 15)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1	(CONTINUED)	

		L70 VINKA	832	
		STRIKEMASTER (BAE)	833	
		T1 JAYHAWK	834	
		T4 (KAWASAKI)	835	
		CT-142 DASH 8	836	
		B-55 BARON	837	
		F-33 BONANZA	838	
		839 PILLAN-TAMIZ	839	
		CT-133 SILVERSTAR	840	
		UNDEFINED	841 THROUGH 1022	
		TRAINER GENERAL	1023	

		TRANSPORT/AIRLINER		

		C-1 (GRUMMAN COD)	1024	
		C-2 GREYHOUND	1025	
		C-5 GALAXY	1026	
		C-7 CARIBOU	1027	
		C-9 NIGHTINGALE	1028	
		C-12 HURON	1029	
		C-123 PROVIDER	1030	
		C-130 HERCULES	1031	
		C-135 STRATOLIFTER	1032	
		C-140 JETSTAR	1033	
		C-141 STARLIFTER	1034	
		HC-130 HERCULES	1035	
		VC-6 KING AIR	1036	
		VC-9 SKYTRAIN II	1037	
		VC-11 GULFSTREAM	1038	
		VC-137 (BOEING)	1039	
		707 (BOEING)	1040	
		720 (BOEING)	1041	
		727 (BOEING)	1042	
		737 (BOEING)	1043	
		747 (BOEING)	1044	
		757 (BOEING)	1045	
		767 (BOEING)	1046	
		L-100 HERCULES	1047	
		L-1011 TRI STAR	1048	
		DC-8 (DOUGLAS)	1049	
		DC-9 (DOUGLAS)	1050	

FIELD CODING FOR J12.6C4

(SHEET 16)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1	(CONTINUED)	

		DC-10 (DOUGLAS)	1051	
		C-119	1052	
		DC-130	1053	
		HC-97	1054	
		C-JM	1055	
		C-54	1056	
		C-97	1057	
		C-118	1058	
		C-119	1059	
		C-121	1060	
		C-124	1061	
		C-131	1062	
		C-133	1063	
		VC-47	1064	
		CV-54	1065	
		CV-140	1066	
		ARAVA	1067	
		CONCORDE	1068	
		ISLANDER	1069	
		SKYVAN	1070	
		TRIDENT	1071	
		A300 AIRBUS	1072	
		A310 AIRBUS	1073	
		C-1 (KAWASKI)	1074	
		C-160 TRANSALL	1075	
		C.207 AZOR	1076	
		C-212 AVIOCAR	1077	
		F27 FRIENDSHIPS	1078	
		F28 FELLOWSHIP	1079	
		G222 SAMA	1080	
		AW.660 ARGOSY	1081	
		BAC111 ONE-ELEVEN	1082	
		DHC-5 BUFFALO	1083	
		DHC-7 DASH	1084	
		AN-2 COLT	1085	
		AN-10 CAT	1086	
		AN-12 CUB	1087	
		AN-14 CLOD	1088	
		AN-22 COCK	1089	
		AN-24 COKE	1090	
		AN-26 CURL	1091	
		AN-28 CASK	1092	
		AN-30 CLANK	1093	

5.2-805

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 17)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1	(CONTINUED)	

		AN-32 CLINE	1094	
		AN-40 (VERY LARGE TURBO- PROP)	1095	
		AN-72 COALER	1096	
		IL-12 COACH	1097	
		IL-18 COOT	1098	
		IL-62 CLASSIC	1099	
		IL-76 CANDID	1100	
		IL-86 CAMBER	1101	
		TU-114 CLEAT	1102	
		TU-134 CRUSTY	1103	
		TU-144 CHARGER	1104	
		TU-154 CARELESS	1105	
		YAK-40 CODDLING	1106	
		YAK-42 CLOBBER	1107	
		TU-104	1108	
		YAK-27	1109	
		IL-38	1110	
		DISUSED	1111	
		DO-228 LT (TRANSPORT)	1112	
		DISUSED	1113	
		AN-74	1114	
		AN-124 CONDOR	1115	
		A320 AIRBUS	1116	
		A321 AIRBUS	1117	
		A330 AIRBUS	1118	
		A340 AIRBUS	1119	
		AN-70	1120	
		AN-225 COSSACK	1121	
		BAE-125-600	1122	
		BAE146	1123	
		777 (BOEING)	1124	
		C-17 GLOBEMASTER III	1125	
		C-20 GULFSTREAM 3/4	1126	
		C-21 LEARJET 35	1127	
		C-22	1128	
		C-23 SHERPA/SHORTS 330	1129	
		C-26 METRO 3	1130	
		YS 11 (NAMC)	1131	
		CL-600 CHALLENGER	1132	
		CL-601 CHALLENGER	1133	
		CN-235M (AIRTECH)	1134	
		EMB-120 BRASILLIA ADV	1135	

FIELD CODING FOR J12.6C4

(SHEET 18)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1	(CONTINUED)	

		EMB-145 AMAZON	1136	
		IL-78 MIDAS	1137	
		MD-11	1138	
		MD-80	1139	
		MD-90	1140	
		PD-808	1141	
		TU-44	1142	
		V-22 OSPREY	1143	
		VC-25	1144	
		XC-2	1145	
		1124 (IAI)	1146	
		1900 (BEECH)	1147	
		330 (SHORTS)	1148	
		580 (CONVAIR)	1149	
		ATR42	1150	
		B55 BARON	1151	
		BN2 ISLANDER	1152	
		C46 COMMANDO	1153	
		CARAVELL (SUD)	1154	
		CC109 (CANADAIR)	1155	
		CHALLENGER (CANADAIR)	1156	
		DHC2	1157	
		DHC6 TWIN OTTER	1158	
		DHC8	1159	
		EMB110 BANDEIRANTE	1160	
		EMB121	1161	
		FALCON 200/FALCON 20	1162	
		FALCON 50	1163	
		FALCON 900	1164	
		FH227 FRIENDSHIP	1165	
		FOKKER 100	1166	
		FOKKER 50	1167	
		FOKKER 60	1168	
		FOKKER 70	1169	
		GROB G850	1170	
		GULFSTREAM 1	1171	
		GULFSTREAM 2	1172	
		JETSTREAM	1173	
		JETSTREAM 31	1174	
		KING AIR	1175	
		L410 TURBOJET	1176	
		LEARJET 23	1177	
		LEARJET 24	1178	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1	(CONTINUED)	

		LEARJET 25 (IMPROVED VER 28)	1179	
		LEARJET 35/36	1180	
		LEARJET 55 (IMPROVED VER 28)	1181	
		LEARJET 60	1182	
		MERLIN 2	1183	
		MERLIN 3	1184	
		MERLIN 4	1185	
		METRO 3	1186	
		SAAB 2000	1187	
		SAAB 340	1188	
		SABRELINER	1189	
		U6 BEAVER	1190	
		VISCOUNT	1191	
		W3 SOKOL	1192	
		Y11 (HAMC)	1193	
		Y12 (HAMC)	1194	
		Y5	1195	
		CC-115 BUFFALO	1196	
		CC-130 HERCULES	1197	
		CC-150 POLARIS	1198	
		C-235 CASA	1199	
		CC-138 TWIN OTTER	1200	
		DO-228 LM (POLLUTION CONTROL)	1201	
		UNDEFINED	1202 THROUGH 1277	
		LIGHT CIVIL	1278	
		TRANSPORT/AIRLINER	1279	
		GENERAL		

		HELICOPTERS		

		AH-1 COBRA	1280	
		AH-64 APACHE	1281	
		CH-3 (SIKORSKY)	1282	
		CH-46 (SEA KNIGHT)	1283	
		CH-47 CHINOOK	1284	
		CH-53 SEA STALLION	1285	
		CH-54 LARKE (SKYCRANE)	1286	
		EH-60 QUICK FOX	1287	

FIELD CODING FOR J12.6C4

(SHEET 20)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1	(CONTINUED)	

		HH-1 IROQUOIS	1288	
		HH-2 SEA SPRITE	1289	
		HH-3 JOLLY GREEN	1290	
		HH-52 (SIKORSKY)	1291	
		HH-53 (SIKORSKY)	1292	
		OH-6 (HUGHES)	1293	
		OH-58 KIOWA	1294	
		RH-3 SEA KING	1295	
		RH-53 (SIKORSKY)	1296	
		SH-2 SEA SPRITE	1297	
		SH-3 SEA KING	1298	
		SH-60 SEA HAWK	1299	
		UH-1 IROQUOIS	1300	
		UH-2 SEA SPRITE	1301	
		UH-12 (HILLER)	1302	
		UH-46 (BOEING)	1303	
		UH-60 BLACK HAWK	1304	
		CH-2U	1305	
		HH-43	1306	
		A109 (AGUSTA)	1307	
		A129 MONGOOSE	1308	
		B0-105 (MBB)	1309	
		DISUSED	1310	
		CH-124 SEA KING	1311	
		DISUSED	1312 THROUGH 1314	
		SA 315 LAMA	1315	
		DISUSED	1316	
		DISUSED	1317	
		SA 321 SUPER FRELON	1318	
		SA 330 PUMA	1319	
		SA 332 SUPER PUMA	1320	
		S 342 GAZELLE	1321	
		SA 350 ASTAR	1322	
		SA 360 DAUPHIN	1323	
		SA 361 DAUPHIN	1324	
		WG-13 LYNX	1325	
		WG-34 (WESTLAND)	1326	
		KA-18 HOG	1327	
		KA-20 HARP	1328	
		KA-25 HORMONE	1329	
		KA-26 HOODLUM	1330	
		MI-1 HARE	1331	
		MI-2 HOPLITE	1332	

FIELD CODING FOR J12.6C4

(SHEET 21)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1	(CONTINUED)	

		MI-4 HOUND	1333	
		MI-6 HOOK	1334	
		MI-8 HIP	1335	
		MI-10 HARKE	1336	
		MI-12 HOMER	1337	
		MI-14 HAZE	1338	
		MI-24 HIND	1339	
		MI-26 HALO	1340	
		CH-53E SUPER STALLION	1341	
		MH-53E SEA DRAGON	1342	
		HH-60 NIGHT HAWK	1343	
		HH-65A DOLPHIN	1344	
		KA-27 HELIX-A (ASW)	1345	
		KA-32 HELIX	1346	
		MI-17 HIP-H	1347	
		MI-28 HAVOC	1348	
		ECUREUIL/FENNEL/ESQILO	1349	
		KA-29 HELIX-B	1350	
		KA-50 HOKUM	1351	
		204 BELL	1352	
		205 BELL	1353	
		206 BELL	1354	
		214 BELL	1355	
		280 ENSTROM	1356	
		300 SCHWEIZER	1357	
		406 COMBAT SCOUT	1358	
		A 109 HIRUNDO	1359	
		A 129 MANGUSTA	1360	
		AH 6 CAYUSE	1361	
		ALOUETTE 2	1362	
		ALOUETTE 3	1363	
		AS 350 ECUREUIL	1364	
		AS 532 COUGAR	1365	
		AS 550 FENNEC	1366	
		AS 555 FENNEC	1367	
		AS 565 PANTHER	1368	
		CH 34 WESTLAND	1369	
		EH 101	1370	
		HAS 1 WASP	1371	
		KA-28 HELIX A	1372	
		MD 500 DEFENDER	1373	
		MI 22	1374	
		MI 25	1375	

FIELD CODING FOR J12.6C4

(SHEET 22)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1	(CONTINUED)	

		MI 35	1376	
		MI 9	1377	
		SA 341 GAZELLE	1378	
		SA 342 GAZELLE	1379	
		SA 365 DAUPHIN 2	1380	
		TS11 ISKRA	1381	
		WESSEX	1382	
		Z9 (HARBIN)	1383	
		CH-146 GRIFFON	1384	
		SEA KING AEW (SKW)	1385	
		EH 101 MERLIN	1386	
		AB-212 AUGUSTA BELL	1387	
		BO-105 BOLKOW	1388	
		CH-47 CHINOOK	1389	
		HUGHES 500	1390	
		HUGHES 3000	1391	
		SH-3D SIKORSKY	1392	
		SH-70L SIKORSKY	1393	
		CH-113 LABRADOR	1394	
		NH 90 (C2)	1395	
		NH 90 (RECCE)	1396	
		NH 90 (EW/SEAD)	1397	
		NH 90 (TRANSPORT)	1398	
		SEA LYNX MK88A	1399	
		SEA KING MK41 (KWS)	1400	
		TIGER (HAP)	1401	
		NH 90 (NAVY)	1402	
		TIGER (HAC)	1403	
		SA 341 GAZELLE CANON	1404	
		AS 532 COUGAR HORIZON	1405	
		AW-520 SAR CORMORANT	1406	
		UNDEFINED	1407 THROUGH 1534	
		HELICOPTER GENERAL	1535	

		AIR-AIR MISSILES		

		AIM-4A FALCON	1536	
		AIM-7 SPARROW	1537	
		AIM-9 SIDEWINDER	1538	
		AIM-54 PHOENIX	1539	
		AIM-2A GENIE	1540	

FIELD CODING FOR J12.6C4

(SHEET 23)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1	(CONTINUED)	

		AIM-120 AMRAAM	1541	
		ASLAM	1542	
		R.530	1543	
		R.550 MAGIC	1544	
		S.530 SUPER 530	1545	
		ASPIDE	1546	
		DISUSED	1547	
		SHAFRIR	1548	
		SKY FLASH	1549	
		DISUSED	1550	
		AA-2 ATOLL	1551	
		AA-3 ANAB	1552	
		AA-5 ASH	1553	
		AA-6 ACRID	1554	
		AA-7 APEX	1555	
		AA-8 APHID	1556	
		AAM	1557	
		AA-9 AMOS	1558	
		AA-XP-1/2	1559	
		AQM-34	1560	
		AQM-91	1561	
		BGM-34 FIREBEE/MQM34	1562	
		YQM-94	1563	
		YQM-98	1564	
		AIM-132 ASRAAM	1565	
		MICA	1566	
		PL-2A	1567	
		PL-5B	1568	
		PL-7	1569	
		PL-9	1570	
		PYTHON 3	1571	
		PYTHON 4	1572	
		AA-10 ALAMO	1573	
		AA-11 ARCHER	1574	
		AA-12 ADDER	1575	
		AA-1 ALKALI	1576	
		AAM-1	1577	
		UNDEFINED	1578 THROUGH 1790	
		AIR-TO-AIR MISSILE	1791	
		GENERAL		

5.2-812

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 24)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1	(CONTINUED)	

		AIR-GROUND/GROUND-		
		GROUND MISSILES		

		AGM-45 SHRIKE	1792	
		AGM-65 MAVERICK	1793	
		AGM-69 SRAM	1794	
		AGM-78 STANDARD ARM	1795	
		AGM-84 HARPOON	1796	
		AGM-86 ALCM	1797	
		AGM-88 HARM	1798	
		AGM-109 TOMAHAWK	1799	
		AM 39 EXOCET	1800	
		AGM-119 PENGUIN	1801	
		AS 11 KILTER	1802	
		AS 12 KEGLER	1803	
		AS 15 KENT	1804	
		AS 30	1805	
		DISUSED	1806	
		RB 05	1807	
		RB 08	1808	
		ADVANCED ASM	1809	
		AS-1 KENNEL	1810	
		AS-2 KIPPER	1811	
		AS-3 KANGAROO	1812	
		AS-4 KITCHEN	1813	
		AS-5 KELT	1814	
		AS-6 KINGFISH	1815	
		AS-7 KERRY	1816	
		DISUSED	1817	
		AS-10 KAREN	1818	
		AS-9 KYLE	1819	
		AS 34 KORMORAN	1820	
		ASM GABRIEL	1821	
		ASM SEA SKUA	1822	
		ASM SEA EAGLE	1823	
		ASMP	1824	
		AT-2 SWATTER	1825	
		AT-3 SAGGER	1826	
		AT-6 SPIRAL	1827	
		C-601	1828	
		C-611	1829	

FIELD CODING FOR J12.6C4

(SHEET 25)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1	(CONTINUED)	

		C-801	1830	
		C-802	1831	
		CSS-2	1832	
		CSS-3	1833	
		CSS-N-3	1834	
		CSS-X-4	1835	
		FL-2 SILKWORM	1836	
		FL-7	1837	
		HY-2	1838	
		HY-3	1839	
		M-9/11	1840	
		WS-1	1841	
		AS-13 KINGBOLT	1842	
		AS-14 KEDGE	1843	
		AS-16 KICKBACK	1844	
		AS-17 KRYPTON	1845	
		AS-18 KAZOO	1846	
		AT-4 SPIGOT	1847	
		AT-5 SPANDREL	1848	
		AT-7 SAXHORN	1849	
		AT-10 STABBER	1850	
		AT-11 SNIPER	1851	
		AT-12	1852	
		AT-13	1853	
		AT-14	1854	
		FROG-7	1855	
		SS-1 SCUD	1856	
		SS-11 SEGO	1857	
		SS-13 SAVAGE	1858	
		SS-18 SATAN	1859	
		SS-19 STILETTO	1860	
		SS-24 SCALPEL	1861	
		SS-25 SICKLE	1862	
		SS-N-2 STYX	1863	
		SS-N-3 SHADDOCK	1864	
		SS-N-6 SERB	1865	
		SS-N-7 STARBRIGHT	1866	
		SS-N-8 SAWFLY	1867	
		SS-N-9 SIREN	1868	
		SS-N-12 SANDBOX	1869	
		SS-N-18 STINGRAY	1870	
		SS-N-19 SHIPWRECK	1871	
		SS-N-20 STURGEON	1872	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1	(CONTINUED)	

		SS-N-21 SAMPSON	1873	
		SS-N-22 SUNBURN	1874	
		SS-N-23 SKIFF	1875	
		SS-N-26	1876	
		AGNI	1877	
		PRITHVI	1878	
		TOW	1879	
		AGM-114 HELLFIRE	1880	
		MLRS	1881	
		HOT	1882	
		MILAN	1883	
		TRIGAT	1884	
		OTOMAT	1885	
		RBS-15M	1886	
		ARMAT	1887	
		ALARM	1888	
		AGM-12 BULLPUP	1889	
		AGM-62A WALLEYE	1890	
		AGM-123A SKIPPER II	1891	
		APACHE (ASM)	1892	
		AS 8	1893	
		AT-1 SWATTER	1894	
		CAS1	1895	
		KH-41 MOSKIT	1896	
		MARTIN PESCADOR	1897	
		MAS1 CARCARA	1898	
		RB 04E	1899	
		STAR	1900	
		SEA INDIGO	1901	
		MM 38	1902	
		MM 40	1903	
		SM 39	1904	
		AS 34 KORMORAN II	1905	
		UNDEFINED	1906 THROUGH 2046	
		AIR-GROUND MISSILE	2047	
		GENERAL		

		SURFACE TO AIR MISSILES		

		FIM-92 STINGER	2048	
		NIM-23 HAWK	2049	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1	(CONTINUED)	

		MIM-42 REDEYE	2050	
		MIM-72 CHAPARRAL	2051	
		MIM-104 PATRIOT	2052	
		RIM-2 TERRIER	2053	
		RIM-7 SEA SPARROW	2054	
		RIM-8 TALOS	2055	
		RIM-24 TARTAR	2056	
		RIM-66 STANDARD MISSILE	2057	
		RIM-67 STANDARD MISSILE	2058	
		BLOWPIPE	2059	
		DISUSED	2060 THROUGH 2061	
		SEA DART	2062	
		DISUSED	2063	
		SEA WOLF	2064	
		S 440 CROTALE EDIR	2065	
		RAPIER	2066	
		RBS-70 (SLM)	2067	
		DISUSED	2068	
		SAM ROLAND	2069	
		SA-2 GUIDELINE	2070	
		SA-3 GOA	2071	
		SA-4 GANEF	2072	
		SA-N-3 GOBLET	2073	
		SA-5 GAMMON	2074	
		SA-N-4 GECKO	2075	
		SA-6 GAINFUL	2076	
		SA-N-6 GRUMBLE	2077	
		SA-7 GRAIL	2078	
		SA-8 GECKO	2079	
		SA-9 GASKIN	2080	
		SA-10 GRUMBLE	2081	
		SA-11 GADFLY	2082	
		SA-12	2083	
		SA-13 GOPHER	2084	
		MISTRAL	2085	
		SA-N-7 GADFLY	2086	
		SA-N-8 GREMLIN	2087	
		SA-14 GREMLIN	2088	
		SA-16 GIMLET	2089	
		SA-X-17	2090	
		SA-N-5 GRAIL	2091	
		SA-N-11 GRISOM	2092	
		SA-12A GLADIATOR	2093	

FIELD CODING FOR J12.6C4

(SHEET 28)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1	(CONTINUED)	

		SA-12B GIANT	2094	
		SA-14 GREMLIN	2095	
		SA-15 GAUNTLET	2096	
		SA-17 GRIZZLY	2097	
		SA-N-12 GRIZZLY	2098	
		SA-18 GROUSE	2099	
		SA-19 GRISOM	2100	
		RIM-116 RAM	2101	
		ADATS	2102	
		JAVELIN	2103	
		STARBURST	2104	
		STARSTREAK	2105	
		ASPIDE	2106	
		I-HAWK	2107	
		ROLAND II	2108	
		SM-2 BLOCK II	2109	
		SM-2 BLOCK III	2110	
		SM-2 BLOCK IIIA	2111	
		SM-2 BLOCK IIIB	2112	
		SM-2 BLOCK IV	2113	
		SM-2 BLOCK IVA	2114	
		SM-3 LEAP	2115	
		AKASH	2116	
		ANZA	2117	
		ANZA II	2118	
		CSA-1	2119	
		CSA-2	2120	
		CSA-4	2121	
		CSA-5	2122	
		FM-80	2123	
		HN-5	2124	
		NK-7	2125	
		NK-16	2126	
		PANTZYR	2127	
		RAPIER 2000/JERNAS	2128	
		RBS-90	2129	
		SAKR	2130	
		SAVA	2131	
		SHANINE	2132	
		SKYGUARD ASPIDE	2133	
		SPADA	2134	
		TAM SAM	2135	
		TIGERCAT	2136	

FIELD CODING FOR J12.6C4

(SHEET 29)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

804	002	AIR AMBIGUOUS TYPE 1 -----	(CONTINUED)	
		VANGUARD	2137	
		SA-N-1 GOA	2138	
		SA-N-9 GAUNTLET	2139	
		SA-N-10	2140	
		ALBATROS/ASPID	2141	
		SM-1	2142	
		VT1 CROTALE	2143	
		MASURCA	2144	
		ASTER 15	2145	
		ASTER 30	2146	
		UNDEFINED	2147 THROUGH 4093	
		RESET TO NO STATEMENT	4094	
		SURFACE-TO-AIR MISSILE GENERAL	4095	

808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1 -----		
-----	-----	---	--	--

IDENTIFIES THE TARGET SPECIFIC
TYPE AS DETERMINED BY AN ONBOARD
CORRELATION PROCESS IF THERE ARE
NO AMBIGUITIES. IDENTIFIES THE
MOST PROBABLE TARGET SPECIFIC
TYPE IN AN ONBOARD CORRELATION
PROCESS DETERMINED THAT THE
SPECIFIC TYPE IS AMBIGUOUS.
INFORMATION IN THIS FIELD SHALL
BE DERIVED ONLY FROM ONBOARD
SOURCES AS OPPOSED TO DATA LINK
SOURCES.

NO STATEMENT	0
CV GENERAL	1
CLEMENCEAU	2
ENTERPRISE	3
FORRESTAL	4
JOHN F KENNEDY	5
KITTY HAWK	6
MIDWAY	7
NIMITZ	8
CHARLES DE GAULLE	9
UNDEFINED	10 THROUGH 21
CVS GENERAL	22
DEDALO	23
MINAS GERAIS	24
VIKRANT	25
VEINTICINCO DE MAYO	26

5.2-818

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 30)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		VIRAAT	27	
		UNDEFINED	28 THROUGH 35	
		CVH GENERAL	36	
		GIUSEPPE GARIBALDI	37	
		INVINCIBLE	38	
		JEANNE D'ARC	39	
		KIEV	40	
		PRINCIPE DE ASTURIAS	41	
		UNDEFINED	42	
		KIEV (MODIFIED)	43	
		UNDEFINED	44 THROUGH 52	
		BB GENERAL	53	
		IOWA	54	
		UNDEFINED	55 THROUGH 64	
		CC GENERAL	65	
		SVERDLOV (MODIFIED)	66	
		UNDEFINED	67 THROUGH 76	
		CG GENERAL	77	
		ANDREA DORIA	78	
		BAINBRIDGE	79	
		BELKNAP	80	
		CALIFORNIA	81	
		UNDEFINED	82	
		KARA	83	
		KIROV	84	
		KRESTA I	85	
		KRESTA II	86	
		KYNDA	87	
		LEAHY	88	
		LONG BEACH	89	
		SLAVA	90	
		TICONDEROGA	91	
		TRUXTUN	92	
		VIRGINIA	93	
		VITTORIO VENETO	94	
		UNDEFINED	95 THROUGH 118	
		CH GENERAL	119	
		MOSKVA	120	
		UNDEFINED	121 THROUGH 130	
		CA GENERAL	131	
		UNDEFINED	132	
		SVERDLOV	133	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		UNDEFINED	134 THROUGH 143	
		DD GENERAL	144	
		AKIZUKI	145	
		ALLEN M SUMNER	146	
		ALLEN M SUMNER FRAM II	147	
		ALMIRANTE	148	
		AMATSUKAZE	149	
		ANIMOSO	150	
		ANSHAN	151	
		ARLEIGH BURKE	152	
		ASAGARI	153	
		UNDEFINED	154	
		AUDACE	155	
		AYANAMI	156	
		DISUSED	157	
		CARPENTER FRAM I	158	
		CHARLES F ADAMS (MOD)	159	
		CHARLES F ADAMS	160	
		COONTZ	161	
		DISUSED	162 THROUGH 163	
		UNDEFINED	164	
		FLETCHER	165	
		FORREST SHERMAN (MOD) & HULL	166	
		FRIESLAND	167	
		GEARING FRAM I	168	
		GEARING FRAM II	169	
		UNDEFINED	170	
		DISUSED	171	
		HARUNA	172	
		HATAKAZE	173	
		HATSUYUKI	174	
		IMPAVIDO	175	
		KANIN	176	
		KASHIN (MODIFIED)	177	
		KASHIN	178	
		KASHIN II	179	
		KIDD	180	
		UNDEFINED	181	
		KILDIN (MODIFIED)	182	
		KOTLIN	183	
		KOTLIN (MODIFIED)	184	

FIELD CODING FOR J12.6C4

(SHEET 32)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		LUDA (TYPE 051)	185	
		MEKO 360	186	
		MINEGUMO	187	
		PROJECT 15	188	
		ROBERT H SMITH	189	
		ROGER D LAURIA	190	
		SAM KOTLIN	191	
		SHIRANE	192	
		SKORY	193	
		SOVREMENYY	194	
		SPRUANCE	195	
		SUFFREN	196	
		TACHIKAZE	197	
		TAKATSUKI	198	
		TYPE 42	199	
		DISUSED	200	
		DISUSED	201	
		TYPE F-70 (AAW)	202	
		TYPE F-70 (ASW)	203	
		TYPE F-67	204	
		UNDEFINED	205	THROUGH 206
		TYPE T-53 (MODIFIED-ASW)	207	
		UNDEFINED	208	
		UDALOY	209	
		YAMAGUMO	210	
		Z	211	
		IROQUOIS	212	
		UNDEFINED	213	THROUGH 276
		DE GENERAL	277	
		UNDEFINED	278	
		CASTLE	279	
		UNDEFINED	280	THROUGH 295
		FF GENERAL	296	
		ALMIRANTE CLEMENTE	297	
		ALMIRANTE PEREIRA DA SILVA	298	
		ALPINO	299	
		DISUSED	300	THROUGH 301
		BALEARES	302	
		BAPTISTA DE ANDRADE	303	
		UNDEFINED	304	
		BERK	305	

5.2-821

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 33)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		BLACK SWAN	306	
		BROADSWORD (TYPE 22)	307	
		BRONSTEIN	308	
		BROOKE	309	
		CANNON	310	
		CHARLES LAWRENCE	311	
		CHENGDU	312	
		CHIKUGO	313	
		COMANDANTE JOAO BELO	314	
		UNDEFINED	315	
		CROSLEY	316	
		DEALEY	317	
		DESCUBIERTA	318	
		DUKE (TYPE 23)	319	
		DURANGO	320	
		EDSALL	321	
		GARCIA	322	
		GLOVER	323	
		GODAVARI	324	
		GRISHA I	325	
		GRISHA II	326	
		GRISHA III	327	
		UNDEFINED	328	
		GRISHA V	329	
		UNDEFINED	330	
		HVIDBJORNEN	331	
		ISHKARI	332	
		ISUZU	333	
		JACOB VAN HEEMSKERCK	334	
		JIANGDONG (TYPE 053J)	335	
		JIANGHU (TYPE 053H)	336	
		JIANGNAN	337	
		JOAO COUTINHO	338	
		KAREL DOORMAN	339	
		KNOX	340	
		DISUSED	341	
		KONI	342	
		KORTENAER	343	
		KRIVAK I	344	
		KRIVAK II	345	
		KRIVAK III	346	
		LA FAYETTE	347	

FIELD CODING FOR J12.6C4

(SHEET 34)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		DISUSED	348	
		LEOPARD	349	
		LUP0	350	
		M	351	
		DISUSED	352	
		MAESTRALE	353	
		MEKO 140 TYPE	354	
		MEKO 200 TYPE	355	
		MIRKA I	356	
		MIRKA II	357	
		NIELS JUEL	358	
		NITEROI	359	
		OLIVER HAZARD PERRY	360	
		OSLO	361	
		PEDER SKRAM	362	
		PETYA I (MODIFIED)	363	
		PETYA I	364	
		PETYA II (MODIFIED)	365	
		PETYA II	366	
		PETYA III	367	
		UNDEFINED	368	
		DISUSED	369	
		RIGA	370	
		RIVER	371	
		BRANDENBURG (TYPE 123)	372	
		RUDDEROW	373	
		SACHSEN (TYPE 124)	374	
		SAVAGE	375	
		DISUSED	376	
		TROMP	377	
		TYPE A 69	378	
		TYPE F-2000S	379	
		UNDEFINED	380 THROUGH 381	
		YUBARI	382	
		BREMEN (TYPE 122)	383	
		CLAUDE JONES	384	
		FFG 7	385	
		HALIFAX	386	
		NAJIN	387	
		PRESIDENT	388	
		SANTA MARIA	389	
		VOSPER MK 5	390	

5.2-823

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		VOSPERTHORNYCROFT MK 7	391	
		WIELINGEN	392	
		FLOREAL	393	
		COMMANDANT BORY	394	
		UNDEFINED	395	THROUGH 478
		FS GENERAL	479	
		ALBATROS	480	
		AUK CLASS	481	
		DE CRISTOFARO	482	
		DISUSED	483	
		MINERVA	484	
		NANUCHKA I	485	
		NANUCHKA II	486	
		NANUCHKA III	487	
		DISUSED	488	
		PF-103	489	
		SAAR 5	490	
		SLEIPNER	491	
		TARANTUL I	492	
		TARANTUL II	493	
		DISUSED	494	
		WADI	495	
		UNDEFINED	496	THROUGH 517
		LL GENERAL	518	
		UNDEFINED	519	THROUGH 528
		LCC GENERAL	529	
		BLUE RIDGE	530	
		CAVEZZALE	531	
		UNDEFINED	532	THROUGH 540
		LKA GENERAL	541	
		CHARLESTON	542	
		UNDEFINED	543	THROUGH 552
		LFS GENERAL	553	
		UNDEFINED	554	THROUGH 563
		LHA GENERAL	564	
		TARAWA	565	
		UNDEFINED	566	THROUGH 575
		LHD GENERAL	576	
		WASP	577	
		UNDEFINED	578	THROUGH 587
		LPA GENERAL	588	
		UNDEFINED	589	THROUGH 598

FIELD CODING FOR J12.6C4

(SHEET 36)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1 -----	(CONTINUED)	
		LPD GENERAL	599	
		AUSTIN	600	
		FEARLESS	601	
		IVAN ROGOV	602	
		UNDEFINED	603	
		RALEIGH	604	
		SAN GIORGIO	605	
		UNDEFINED	606 THROUGH 615	
		LPH GENERAL	616	
		IWO JIMA	617	
		UNDEFINED	618 THROUGH 627	
		LSD GENERAL	628	
		ANCHORAGE	629	
		ASHLAND	630	
		CABILDO	631	
		OURAGAN	632	
		FOUDRE	633	
		THOMASTON	634	
		WHIDBEY ISLAND	635	
		UNDEFINED	636 THROUGH 646	
		LSL GENERAL	647	
		SIR GERAINT	648	
		UNDEFINED	649 THROUGH 657	
		LSM GENERAL	658	
		ASHDOD	659	
		BATRAL	660	
		CAKABEY	661	
		EDIC I	662	
		EDIC II	663	
		LSM-1	664	
		MP-4	665	
		POLNOCHNY	666	
		POLOCHNY A	667	
		POLOCHNY B	668	
		POLOCHNY C	669	
		POLOCHNY D	670	
		YUDAO	671	
		YULIMG	672	
		BOUGAINVILLE	673	
		UNDEFINED	674 THROUGH 687	
		LST GENERAL	688	
		ALLIGATOR	689	

5.2-825

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 37)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		ATSUMI	690	
		UNDEFINED	691	
		BROOKE MARINE 93M	692	
		CAKABEY NL-122	693	
		CNIM PS 700	694	
		DE SOTO COUNTY	695	
		DISUSED	696	
		HENGAM	697	
		LST 1-510	698	
		LST 511-1152	699	
		MIURA	700	
		NEWPORT	701	
		ROPUCHA	702	
		SARUCABEY	703	
		CNGF	704	
		OCEAN	705	
		ALBION	706	
		TERREBONNE PARISH	707	
		TOBRUK	708	
		UNDEFINED	709	
		YUKAN	710	
		UNDEFINED	711 THROUGH 730	
		LSV GENERAL	731	
		UNDEFINED	732 THROUGH 741	
		LC GENERAL	742	
		UNDEFINED	743 THROUGH 751	
		LCM GENERAL	752	
		CTM 1	753	
		HUNGNAM	754	
		LCM 1057/1058	755	
		LCM 6	756	
		LCM 8	757	
		T-4	758	
		TSAPLYA	759	
		LCM (TYPE 521)	760	
		UNDEFINED	761 THROUGH 772	
		LCP GENERAL	773	
		DISUSED	774	
		LCM 1031	775	
		LCM 1035/1036	776	
		LCM 1055/1056	777	
		NAMPO	778	

5.2-826

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 38)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1 -----	(CONTINUED)	
		UNDEFINED	779 THROUGH 788	
		LCPL GENERAL	789	
		UNDEFINED	790 THROUGH 799	
		LWC GENERAL	800	
		UNDEFINED	801 THROUGH 810	
		LCU GENERAL	811	
		BALIKPAPAN	812	
		BOMBARDA	813	
		BRAILA	814	
		LCU (TYPE 520)	815	
		DISUSED	816	
		DISUSED	817	
		DISUSED	818	
		DSM-501	819	
		HANCHON	820	
		HANTAE	821	
		KISHON	822	
		KVALSUND	823	
		LCT MK 5	824	
		LCT MK 6	825	
		LCU 501	826	
		MFP D-3	827	
		MZ	828	
		REINOYSUND	829	
		SMB-1	830	
		TU 57-M	831	
		US LCU 1466	832	
		VYDRA	833	
		YURA	834	
		UNDEFINED	835 THROUGH 866	
		LCVP GENERAL	867	
		UNDEFINED	868 THROUGH 877	
		LCAC GENERAL	878	
		AIST	879	
		GUS	880	
		LEBED	881	
		UTENOK	882	
		WELLINGTON BH-7 MK 4	883	
		WELLINGTON BH-7 MK 5	884	
		WINCHESTER (SR.N6)	885	
		UNDEFINED	886 THROUGH 896	
		MM GENERAL	897	

5.2-827

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1 -----	(CONTINUED)	
		ALESHA	898	
		ALVSBORG	899	
		BORGEN	900	
		CARLSKRONA	901	
		COSAR	902	
		FALSTER	903	
		FURUSUND (MUL-20)	904	
		LANGELAND	905	
		LINDORMEN	906	
		LSM-1 (MODIFIED)	907	
		MUL-11	908	
		MUL-12	909	
		DISUSED	910	
		SMITH	911	
		US YMP	912	
		VIDAR	913	
		UNDEFINED	914 THROUGH 935	
		MCS GENERAL	936	
		UNDEFINED	937 THROUGH 946	
		MCJ GENERAL	947	
		UNDEFINED	948 THROUGH 957	
		MCD GENERAL	958	
		KINGSTON	959	
		MUEHLHAUSEN MCD (TYPE 742A)	960	
		UNDEFINED	961 THROUGH 968	
		MCM GENERAL	969	
		UNDEFINED	970 THROUGH 979	
		MH GENERAL	980	
		UNDEFINED	981 THROUGH 990	
		MHO GENERAL	991	
		UNDEFINED	992 THROUGH 1001	
		MHC GENERAL	1002	
		ADJUTANT (MODIFIED)	1003	
		AGGRESSIVE	1004	
		CIRCE	1005	
		WEIDEN MHC (TYPE 332)	1006	
		KOBLENZ MHC (TYPE 331B)	1007	
		UNDEFINED	1006 THROUGH 1007	
		HAM	1008	
		HUNT	1009	
		LANDSORT	1010	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		LERICI	1011	
		MSC 50	1012	
		MSO 218	1013	
		MSO 503	1014	
		SAUDA	1015	
		SIRIUS	1016	
		DISUSED	1017	
		TRIPARTITE	1018	
		VANYA I	1019	
		SANDOWN (SRMH)	1020	
		UNDEFINED	1021 THROUGH 1029	
		MHSC GENERAL	1030	
		MARS	1031	
		UNDEFINED	1032 THROUGH 1043	
		MHI GENERAL	1044	
		BAY	1045	
		UNDEFINED	1046 THROUGH 1054	
		MHA GENERAL	1055	
		UNDEFINED	1056 THROUGH 1065	
		ML GENERAL	1066	
		UNDEFINED	1067 THROUGH 1076	
		MLC GENERAL	1077	
		CURLEW	1078	
		UNDEFINED	1079 THROUGH 1088	
		MLI GENERAL	1089	
		UNDEFINED	1090 THROUGH 1099	
		MLO GENERAL	1100	
		UNDEFINED	1101 THROUGH 1110	
		MLR GENERAL	1111	
		UNDEFINED	1112 THROUGH 1121	
		MLA GENERAL	1122	
		UNDEFINED	1123 THROUGH 1132	
		MLS GENERAL	1133	
		UNDEFINED	1134 THROUGH 1143	
		MS GENERAL	1144	
		UNDEFINED	1145 THROUGH 1154	
		MSF GENERAL	1155	
		EX-ERIMO	1156	
		K-8	1157	
		KROGULEC	1158	
		M-40	1159	
		MSO-421	1160	

FIELD CODING FOR J12.6C4

(SHEET 41)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1 -----	(CONTINUED)	
		NATYA I	1161	
		NATYA II	1162	
		RIVER	1163	
		T-43	1164	
		YURKA	1165	
		UNDEFINED	1166 THROUGH 1180	
		MSO GENERAL	1181	
		ACME	1182	
		AGGRESSIVE	1183	
		UNDEFINED	1184 THROUGH 1193	
		MSC GENERAL	1194	
		136 FT	1195	
		ADJUTANT	1196	
		ARKOE	1197	
		BAY	1198	
		DOKKUM	1199	
		HATSUSHIMA	1200	
		HAYASE	1201	
		DISUSED	1202	
		KOUZJ	1203	
		LENIWKA	1204	
		HAMELN MSC (TYPE 343)	1205	
		MSC 268	1206	
		MSC 292	1207	
		MSC 294	1208	
		NOTEC	1209	
		SASHA	1210	
		SAUDA	1211	
		DISUSED	1212	
		DISUSED	1213	
		SONYA	1214	
		T-301	1215	
		T-43	1216	
		TAKAMI	1217	
		DISUSED	1218	
		VANYA	1219	
		VANYA I	1220	
		VANYA II	1221	
		WUSONG	1222	
		ZHENYA	1223	
		UNDEFINED	1224 THROUGH 1263	
		MSI GENERAL	1264	

5.2-830

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1 -----	(CONTINUED)	
		DISUSED	1265	
		AUX MINESWEEPER NO 1	1266	
		CAPE	1267	
		FRAUENLOB (TYPE 394)	1268	
		HAM	1269	
		HERSTAL	1270	
		KIISKI	1271	
		KUHA	1272	
		M-111	1273	
		M-15	1274	
		M-31	1275	
		M-43/47	1276	
		PIPA-A	1277	
		WOCHANG	1278	
		YEVGENYA	1279	
		YUKTO	1280	
		UNDEFINED	1281	THROUGH 1302
		MSR GENERAL	1303	
		UNDEFINED	1304	THROUGH 1313
		MSB GENERAL	1314	
		K-8	1315	
		N-300	1316	
		NESTIN	1317	
		N0. 7	1318	
		OLYA	1319	
		PO-2	1320	
		TR-40	1321	
		VD-141	1322	
		VULCAIN	1323	
		STYX	1324	
		PLUTON	1325	
		ACHERON	1326	
		UNDEFINED	1327	THROUGH 1334
		MSA GENERAL	1335	
		UNDEFINED	1336	THROUGH 1345
		MSD GENERAL	1346	
		HFG-1 (TROIKA)	1347	
		ILYUSHA	1348	
		UNDEFINED	1349	THROUGH 1358
		MCSD GENERAL	1359	
		UNDEFINED	1360	THROUGH 1369
		MSS GENERAL	1370	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		ANDRYUSHA	1371	
		BALTIKA	1372	
		POLNOCNY	1373	
		UNDEFINED	1374 THROUGH 1383	
		MSH GENERAL	1384	
		UNDEFINED	1385 THROUGH 1394	
		MSO GENERAL	1395	
		BERLAIMONT (MODIFIED)	1396	
		UNDEFINED	1397 THROUGH 1405	
		MSHC GENERAL	1406	
		HUNT	1407	
		TRIPARTITE	1408	
		WILTON	1409	
		UNDEFINED	1410 THROUGH 1419	
		PP GENERAL	1420	
		AB 25	1421	
		UNDEFINED	1422	
		BALDER	1423	
		CASTLE	1424	
		ISLAND	1425	
		KRONSHADT	1426	
		PC-1638	1427	
		UNDEFINED	1428 THROUGH 1438	
		PG GENERAL	1439	
		BESKYTTEVREN	1440	
		BIHORO	1441	
		ERIMO	1442	
		DISUSED	1443	
		HVIDBJOERNEN	1444	
		IZU	1445	
		KOJIMA	1446	
		UNDEFINED	1447	
		NOJIMA	1448	
		PAUK	1449	
		PEACOCK	1450	
		POTI	1451	
		SAVAGE	1452	
		SHIRETOKO	1453	
		SOYA	1454	
		TACOMA	1455	
		LEOPARD (TYPE 148)	1456	
		BAMBU	1457	

FIELD CODING FOR J12.6C4

(SHEET 44)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1 -----	(CONTINUED)	
		CASSIOPEA	1458	
		UNDEFINED	1459 THROUGH 1480	
		PGS GENERAL	1481	
		UNDEFINED	1482 THROUGH 1491	
		PGB GENERAL	1492	
		UNDEFINED	1493 THROUGH 1502	
		PGF GENERAL	1503	
		ALBATROS (TYPE 143)	1504	
		ASHEVILLE	1505	
		BARNEGAT	1506	
		CHONGJU	1507	
		GEPARD (TYPE 143A)	1508	
		HOUKU	1509	
		IVANSUSANIN	1510	
		KAMAN	1511	
		KARTAL	1512	
		KOMAR	1513	
		LA COMBATTANTE II	1514	
		LA COMBATTANTE III	1515	
		LURSSSEN FPB 57 TYPE	1516	
		OKHTENSKIY	1517	
		OSA I	1518	
		OSA II	1519	
		P-4	1520	
		PURGA	1521	
		SAAR 2	1522	
		SAAR 3	1523	
		SAAR 4	1524	
		SAAR 5	1525	
		SARIWON	1526	
		SNOEGG	1527	
		SOHUNG	1528	
		SOJU	1529	
		SORUM	1530	
		STORM	1531	
		T	1532	
		T-43	1533	
		T-58	1534	
		VOSPER 100-FT	1535	
		VOSPER BRAVE	1536	
		WILLEMOES	1537	
		UNDEFINED	1538 THROUGH 1583	

5.2-833

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 45)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		PC GENERAL	1584	
		ADMIRABLE	1585	
		AGDLEK	1586	
		AKIZUKI	1587	
		ATTACK	1588	
		BAY	1589	
		DISUSED	1590	
		BROOKE MARINE 108-FT	1591	
		CACINE	1592	
		CHONGJU	1593	
		DAPHNE	1594	
		GDANSK	1595	
		HAIKOU	1596	
		HAINAN	1597	
		HANOE	1598	
		K-48	1599	
		KRALJEVICA	1600	
		KRONSHADT	1601	
		LAKE	1602	
		MAGAEN	1603	
		MATSUNAMI	1604	
		MIZUTORI	1605	
		MURAKUMO	1606	
		OBLUZE	1607	
		PGM 71	1608	
		SDB MK II	1609	
		SDB MK III	1610	
		SEAFORTH	1611	
		SHANGHAI	1612	
		SHANGHAI II	1613	
		SHANGHAI II (MODIFIED)	1614	
		SHIKINAMI	1615	
		SO-1	1616	
		SOMAN	1617	
		STENKA	1618	
		T-58	1619	
		TAECHONG	1620	
		UK FORD	1621	
		UMIGIRI	1622	
		US 110-FT	1623	
		US 173-FT	1624	
		UNDEFINED	1625	

5.2-834

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 46)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		ARCHER	1626	
		ATTACKER	1627	
		23M PC (MANLY)	1628	
		UNDEFINED	1629 THROUGH 1681	
		PCF GENERAL	1682	
		BABOCHKA	1683	
		MURAVEY	1684	
		POTI	1685	
		SO-1 (MODIFIED)	1686	
		UNDEFINED	1687 THROUGH 1696	
		PCE GENERAL	1697	
		UNDEFINED	1698 THROUGH 1707	
		PB GENERAL	1708	
		AKAGI	1709	
		AKIZUKI	1710	
		ALBATROZ	1711	
		ATTACK P-90	1712	
		BARSO	1713	
		BAY	1714	
		BIZAN	1715	
		BROOKE MARINE 37.5M	1716	
		CHONGJIN	1717	
		DABUR	1718	
		DALARO	1719	
		DE L'ESTEREL	1720	
		DILOS	1721	
		DOM ALEIXO	1722	
		DISUSED	1723	
		FREMANTLE	1724	
		GOULANDRIS	1725	
		GUANABACOA	1726	
		HAMAGIRI	1727	
		HAMELIN 37M	1728	
		HIDAKA	1729	
		HUANGPU	1730	
		INTERCEPTOR MK II	1731	
		KIMJIN 67-FT	1732	
		MATSUNAMI	1733	
		MURAKUMO	1734	
		OIRASE	1735	
		P 400	1736	
		P-6	1737	

5.2-835

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 47)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		PANAGOPOULOS	1738	
		PATRA	1739	
		PBR MK II	1740	
		PBR MK III	1741	
		PGM 71	1742	
		PO-2	1743	
		POLISH K-8	1744	
		POLUCHAT I	1745	
		SHANTOU	1746	
		SHIKINAMI	1747	
		SINHUNG 72-FT	1748	
		SKANOER	1749	
		SOYA/TSUGARU	1750	
		SPEAR	1751	
		STEWART 85-FT	1752	
		SWATOW	1753	
		SWIFT	1754	
		TAISHAN	1755	
		TESHIO	1756	
		TRACKER II	1757	
		US 110-FT	1758	
		US ARMY 2001 65-FT	1759	
		USCG 83-FT	1760	
		VEDETTE 28 92-FT	1761	
		VIKRAM	1762	
		VOSPER 70-FT	1763	
		YAMAYURI	1764	
		ZHUK	1765	
		SNOEGG	1766	
		MARS	1767	
		TRIDENT	1768	
		UNDEFINED	1769 THROUGH 1842	
		PBF GENERAL	1843	
		CHAO (CHODO)	1844	
		DE L'ESTEREL	1845	
		GIRNE	1846	
		HAUK	1847	
		HUGIN	1848	
		SLEPEN	1849	
		UNDEFINED	1850	
		SPICA II	1851	
		MARS	1852	

5.2-836

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 48)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1 -----	(CONTINUED)	
		UNDEFINED	1853 THROUGH 1863	
		PBS GENERAL	1864	
		UNDEFINED	1865 THROUGH 1874	
		PBR GENERAL	1875	
		LEIE	1876	
		PIYAVKA	1877	
		SHMEL	1878	
		VOSH	1879	
		YATUSH	1880	
		YAZ	1881	
		UNDEFINED	1882 THROUGH 1891	
		PT GENERAL	1892	
		AN JU	1893	
		EPITROP	1894	
		HIGGINS 78-FT	1895	
		HUCHUAN PTH-	1896	
		HUZHOU	1897	
		IWON	1898	
		DISUSED	1899	
		KU SONG	1900	
		NO. 11	1901	
		P-4	1902	
		P-6	1903	
		PILICA	1904	
		SHERSHEN	1905	
		SIN HUNG	1906	
		SIN NAM	1907	
		SINPO	1908	
		SOLOVEN	1909	
		SPICA	1910	
		TJELD	1911	
		WISLA	1912	
		DISUSED	1913	
		SHANGDONG	1914	
		TURYA	1915	
		UNDEFINED	1916 THROUGH 2047	
		PHM GENERAL	2048	
		MATKA	2049	
		PEGASUS	2050	
		SARANCHA	2051	
		SHIMRIT	2052	
		SPARVIERO	2053	

5.2-837

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		UNDEFINED	2054 THROUGH 2063	
		BM GENERAL	2064	
		UNDEFINED	2065 THROUGH 2074	
		BMR GENERAL	2075	
		UNDEFINED	2076 THROUGH 2085	
		SWCL GENERAL	2086	
		UNDEFINED	2087 THROUGH 2096	
		AA GENERAL	2097	
		UNDEFINED	2098 THROUGH 2107	
		AG GENERAL	2108	
		ADOLF	2109	
		AKIZUKI	2110	
		ANGARA	2111	
		ARGO	2112	
		AYANAMI	2113	
		DISUSED	2114 THROUGH 2115	
		CHAMOIS	2116	
		CHIHAYA	2117	
		DALDYN	2118	
		DISUSED	2119	
		DINGHAI	2120	
		ENDURANCE	2121	
		EXPLORER	2122	
		DISUSED	2123	
		FRIPONNE	2124	
		GALEB	2125	
		UNDEFINED	2126	
		HAM	2127	
		DISUSED	2128	
		HAYABUSA	2129	
		DISUSED	2130	
		ISLES	2131	
		KEYLA	2132	
		KURIHAMA	2133	
		L'ARCHEONAUTE	2134	
		L'ATHOS	2135	
		UNDEFINED	2136	
		LENTA	2137	
		LIANYUN	2138	
		LSIL	2139	
		MIZUTORI	2140	
		MP-2	2141	

FIELD CODING FOR J12.6C4

(SHEET 50)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		MP-8	2142	
		MURASAME	2143	
		NEFTEGAZ	2144	
		NØ. 81	2145	
		NORGE	2146	
		OHRE	2147	
		ONEGA	2148	
		DISUSED	2149	
		POSEIDON	2150	
		PS-10	2151	
		RARI	2152	
		RHIN	2153	
		SABAC	2154	
		SHAHSAVAR	2155	
		ST. LYKODIS	2156	
		STALWART	2157	
		T-43	2158	
		TAPATAI	2159	
		TAPPE	2160	
		THULE	2161	
		TOMBA	2162	
		TSUGARU	2163	
		UMITAKA	2164	
		US 184 FT. PCE	2165	
		US 72 FT. HMDL	2166	
		VANGUARD	2167	
		VIS	2168	
		VYTEGRALES	2169	
		WHISKEY	2170	
		WILHELM PULLWER (TYPE 741)	2171	
		PELIKAAN	2172	
		RANCE	2173	
		MERCURE	2174	
		STERNE	2175	
		ALBATROS	2176	
		PHENIX	2177	
		UNDEFINED	2178 THROUGH 2256	
		ARV GENERAL	2257	
		ARGUS	2258	
		ENGADINE	2259	
		RELIANT	2260	

5.2-839

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		UNDEFINED	2261 THROUGH 2270	
		AVT GENERAL	2271	
		LEXINGTON	2272	
		UNDEFINED	2273 THROUGH 2282	
		AE GENERAL	2283	
		EVROS	2284	
		DISUSED	2285	
		KILAUEA	2286	
		NITRO	2287	
		REGENT	2288	
		SURIBACHI	2289	
		WESTERWALD (TYPE 760)	2290	
		UNDEFINED	2291 THROUGH 2301	
		AEL GENERAL	2302	
		UNDEFINED	2303 THROUGH 2312	
		AET GENERAL	2313	
		UNDEFINED	2314 THROUGH 2323	
		AETL GENERAL	2324	
		UNDEFINED	2325 THROUGH 2334	
		AGF GENERAL	2335	
		ABDIEL	2336	
		CORONADO	2337	
		GODETIA	2338	
		LA SALLE	2339	
		DISUSED	2340	
		ZINNIA	2341	
		ELBE (TYPE 404)	2342	
		UNDEFINED	2343 THROUGH 2351	
		ACM GENERAL	2352	
		UNDEFINED	2353 THROUGH 2362	
		APB GENERAL	2363	
		MICHELANGELO	2364	
		UNDEFINED	2365 THROUGH 2374	
		ABU GENERAL	2375	
		CARDENAS	2376	
		FINIK I	2377	
		KARPF II	2378	
		SKB 64	2379	
		YANTAI	2380	
		YANNAN	2381	
		YANGUAN	2382	
		TIANEE	2383	

FIELD CODING FOR J12.6C4

(SHEET 52)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		LA PRUDENTE	2384	
		UNDEFINED	2385 THROUGH 2395	
		ABUD GENERAL	2396	
		UNDEFINED	2397 THROUGH 2406	
		ANL GENERAL	2407	
		UNDEFINED	2408 THROUGH 2417	
		ARC GENERAL	2418	
		EMBA I	2419	
		EMBA II	2420	
		KALAR	2421	
		KLASMA	2422	
		MP-2	2423	
		NEPTUNE	2424	
		TELNOVSK (MODIFIED)	2425	
		YOUDIAN	2426	
		ZEUS	2427	
		UNDEFINED	2428 THROUGH 2440	
		AK GENERAL	2441	
		2ND LT JOHN P BOBO	2442	
		ALCHIBA	2443	
		AMGUEMA	2444	
		ANDIZHAN	2445	
		ANDONG	2446	
		ANDROMEDA (CONVERTED)	2447	
		DISUSED	2448	
		BARRICADE	2449	
		BITTERBUSH	2450	
		C3-S-33A TYPE (CONVERTED)	2451	
		C4-S-66A TYPE	2452	
		C4-S-69B TYPE	2453	
		C4-S-A3 TYPE	2454	
		C5-S-75A TYPE	2455	
		CHULYM	2456	
		CPL LOUIS J HAUGE JR	2457	
		DINGHAI	2458	
		DONBA SS	2459	
		FS DESIGN 330	2460	
		GALATI	2461	
		HONGQI	2462	
		ISLES	2463	
		KANARYA	2464	

5.2-841

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		KOLOMNA	2465	
		LENINGRADSKY KOMSOMOLETS	2466	
		LSIL	2467	
		NEON ANTONOV	2468	
		NORWALK	2469	
		PT-61	2470	
		SGT MATEJ KOCAK	2471	
		THROSK	2472	
		TREE	2473	
		YANHANG	2474	
		YUNYY PARTIZAN	2475	
		UNDEFINED	2476 THROUGH 2521	
		AKL GENERAL	2522	
		ELTANIN	2523	
		KEYLA	2524	
		UNDEFINED	2525	
		LENTA	2526	
		UNDEFINED	2527	
		MP 4	2528	
		MP 6	2529	
		MUNA	2530	
		SEKSTAN	2531	
		TELNOVSK	2532	
		WISTING	2533	
		GORGONA	2534	
		UNDEFINED	2535 THROUGH 2549	
		AKR GENERAL	2550	
		ALGOL (SL 7)	2551	
		CALLAGHAN	2552	
		COMET	2553	
		METEOR	2554	
		DISUSED	2555	
		MAINE (CONVERTED)	2556	
		UNDEFINED	2557 THROUGH 2566	
		AFS GENERAL	2567	
		FORT	2568	
		UNDEFINED	2569	
		MARS	2570	
		RESOURCE	2571	
		UNDEFINED	2572 THROUGH 2580	
		AOE GENERAL	2581	
		SACRAMENTO	2582	

FIELD CODING FOR J12.6C4

(SHEET 54)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1 -----	(CONTINUED)	
		SAGAMI	2583	
		UNDEFINED	2584 THROUGH 2593	
		AD GENERAL	2594	
		YELLOWSTONE	2595	
		SAMUEL GOMPERS	2596	
		DIXIE	2597	
		STALWART	2598	
		UNDEFINED	2599 THROUGH 2608	
		AWW GENERAL	2609	
		UNDEFINED	2610 THROUGH 2619	
		AH GENERAL	2620	
		HAVEN	2621	
		OB	2622	
		DISUSED	2623	
		UNDEFINED	2624 THROUGH 2632	
		AGB GENERAL	2633	
		DOBRYNYA NIKITICH	2634	
		HANSE	2635	
		IVANSUSANIN	2636	
		SHIRASE	2637	
		YANHA	2638	
		UNDEFINED	2639 THROUGH 2648	
		AGBL GENERAL	2649	
		EISVOGEL (TYPE 721)	2650	
		DISUSED	2651	
		UNDEFINED	2652 THROUGH 2661	
		AGI GENERAL	2662	
		ALPINIST	2663	
		ARMINZA	2664	
		UNDEFINED	2665	
		BALZAM	2666	
		BOLOGOE	2667	
		DISUSED	2668	
		HAM	2669	
		DISUSED	2670	
		DISUSED	2671	
		LENTRA	2672	
		MAYAK	2673	
		MIRNY	2674	
		MOMA	2675	
		NIKOLAY ZUBOV	2676	
		OKEAN	2677	

5.2-843

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 55)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1 -----	(CONTINUED)	
		DISUSED	2678	
		PAMIR	2679	
		PRIMORYE	2680	
		ALSTER (TYPE 423)	2681	
		UNDEFINED	2682	THROUGH 2705
		ALS GENERAL	2706	
		UNDEFINED	2707	THROUGH 2716
		AEM GENERAL	2717	
		AMGA	2718	
		ANDIZHAN (MODIFIED)	2719	
		LAMA	2720	
		MALINA	2721	
		MELITOPOL	2722	
		MP 6	2723	
		UNDEFINED	2724	THROUGH 2733
		AGM GENERAL	2734	
		AGM-24	2735	
		GEN HOYT S VANDENBERG	2736	
		OBSERVATION ISLAND	2737	
		RANGE SENTINEL	2738	
		(HASKELL TYPE)		
		REDSTONE	2739	
		UNDEFINED	2740	THROUGH 2749
		AGOR GENERAL	2750	
		ABKHAZIYA	2751	
		AKADEMIK KRYLOV	2752	
		ARAD	2753	
		BALIKPAPAN	2754	
		BELGICA	2755	
		DISUSED	2756	
		COOK	2757	
		D'ENTRECASTEAUX	2758	
		DOBRYNYA NIKITICH	2759	
		DONG MING	2760	
		ELTANIN	2761	
		ENDEAVOR	2762	
		FRANCESCO NULLO	2763	
		DISUSED	2764	
		GRIGORE ANTIPA	2765	
		GYRE	2766	
		HAYES	2767	
		HECLA	2768	

5.2-844

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 56)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	
		MELVILLE	2769	
		MSC 60	2770	
		NAUTILUS	2771	
		NEVELSKOY	2772	
		NIKOLAY ZUBOV	2773	
		PITHEAS	2774	
		POLYUS	2775	
		QUEST	2776	
		ROBERT D CONRAD	2777	
		T-43	2778	
		TRITON	2779	
		TUI	2780	
		TYDEMAN	2781	
		XIANG YANG HONG	2782	
		YANLUN	2783	
		YUG	2784	
		ZENOBE GRAMME	2785	
		MAYAK	2786	
		UNDEFINED	2787 THROUGH 2823	
		AGOB GENERAL	2824	
		POLARSTERN	2825	
		UNDEFINED	2826 THROUGH 2835	
		AGOS GENERAL	2836	
		UNDEFINED	2837 THROUGH 2845	
		AO GENERAL	2846	
		UNDEFINED	2847	
		AKAR	2848	
		ALBAY BURBAK	2849	
		ALTAY	2850	
		UNDEFINED	2851	
		BASKUNCHAK	2852	
		BAYLEAF	2853	
		BINBASI GURGAN	2854	
		DISUSED	2855	
		CIMARRON	2856	
		CIMARRON (JUMBOISED)	2857	
		DORA	2858	
		HAMANA	2859	
		DISUSED	2860	
		DISUSED	2861	
		HENRY J KAISER	2862	
		IRTYSH	2863	

5.2-845

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 57)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		KALININGRADNEFT	2864	
		KHOBI	2865	
		KONDA	2866	
		METTAWEE	2867	
		MISPILLION (JUMBOISED)	2868	
		MOSKIT	2869	
		NEOSHO	2870	
		NERCHA	2871	
		NORWEGIAN BOW	2872	
		OLEKMA	2873	
		PATAPSCO	2874	
		PEVEK	2875	
		UNDEFINED	2876	
		SOFIYA	2877	
		SPESSART (TYPE 704A)	2878	
		TASKIZAK	2879	
		USEDOM	2880	
		WALCHENSEE (TYPE 703)	2881	
		WAVE	2882	
		DISUSED	2883	
		YUZBASI TOLUNAY	2884	
		BRAMBLELEAF	2885	
		UNDEFINED	2886	THROUGH 2936
		AOT GENERAL	2937	
		AMERICAN EXPLORER	2938	
		AOTL	2939	
		EBANOL	2940	
		FULIN	2941	
		FUZHOU	2942	
		GUANZGHOU	2943	
		LEIZHOU	2944	
		MAUMEE	2945	
		METTAWEE	2946	
		MISSION	2947	
		POTOMOC	2948	
		SEALIFT	2949	
		SUAMICO	2950	
		T 5 TYPE	2951	
		TM2	2952	
		PORT VENDRES	2953	
		UNDEFINED	2954	THROUGH 2973
		AOTL GENERAL	2974	

5.2-846

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 58)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		DISUSED	2975	
		KHOBI	2976	
		UNDEFINED	2977 THROUGH 2986	
		AOR GENERAL	2987	
		BANDAR ABBAS	2988	
		BEREZINA	2989	
		BORIS CHILIKIN	2990	
		CAPITAN OLA PANTOJA	2991	
		DEEPAK	2992	
		DUBNA	2993	
		DURANCE	2994	
		FUQING	2995	
		KAZBEK	2996	
		KHARG	2997	
		MEERSBURG (TYPE 701C)	2998	
		MESAR	2999	
		OLWEN	3000	
		POOLSTER	3001	
		POLYARNIK	3002	
		PROTECTEUR	3003	
		PROVIDER	3004	
		ROVER	3005	
		SAO GABRIEL	3006	
		STROMBOLI	3007	
		TIDE (IMPROVED)	3008	
		UDA	3009	
		WICHITA	3010	
		FORT VICTORIA	3011	
		BERLIN (TYPE 702C)	3012	
		UNDEFINED	3013 THROUGH 3042	
		AORL GENERAL	3043	
		LEIZHOU	3044	
		UNDEFINED	3045 THROUGH 3054	
		AOL GENERAL	3055	
		PUNARUU	3056	
		UNDEFINED	3057 THROUGH 3065	
		AGP GENERAL	3066	
		GRAHAM COUNTY	3067	
		NORGE	3068	
		DISUSED	3069	
		MERCUUR	3070	
		UNDEFINED	3071 THROUGH 3079	

5.2-847

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 59)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		AP GENERAL	3080	
		MIKHAIL KALININ	3081	
		PANDORA	3082	
		QIONGSHA	3083	
		UNDEFINED	3084	THROUGH 3093
		AGR GENERAL	3094	
		UNDEFINED	3095	THROUGH 3104
		AOSR GENERAL	3105	
		UNDEFINED	3106	THROUGH 3115
		AR GENERAL	3116	
		ACHELOUS	3117	
		AJAX	3118	
		AMPHION	3119	
		AMUR	3120	
		ARL I	3121	
		DALIANG	3122	
		DILIGENCE	3123	
		DIXIE	3124	
		JULES VERNE	3125	
		OSKOL	3126	
		RHIN	3127	
		STALWART	3128	
		UNDEFINED	3129	THROUGH 3145
		ARL GENERAL	3146	
		ARCHELOUS	3147	
		UNDEFINED	3148	THROUGH 3157
		AGE GENERAL	3158	
		BELGICA	3159	
		BERRY	3160	
		UNDEFINED	3161	
		COMMANDANT RIVIERE	3162	
		DESNA	3163	
		DOBRYNYA NIKITICH	3164	
		EF 3	3165	
		HENRI POINCARE	3166	
		ILE D'OLERON	3167	
		IVANSUSANIN	3168	
		KOLOMNA	3169	
		LENTRA	3170	
		MARSHAL NEDELIN	3171	
		MOMA	3172	
		MP-8	3173	

5.2-848

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 60)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		MUNA	3174	
		NARVIK	3175	
		OS-3	3176	
		POINT LOMA	3177	
		POTOK	3178	
		QUARTO	3179	
		SASHA	3180	
		SIBIR	3181	
		SO-1	3182	
		T-43	3183	
		TRITON	3184	
		DISUSED	3185	
		YAL 01	3186	
		YANXI	3187	
		ROSSETTI	3188	
		DENTI	3189	
		MONGE	3190	
		UNDEFINED	3191 THROUGH 3227	
		ARS GENERAL	3228	
		BOLSTER	3229	
		DISUSED	3230	
		INGUL	3231	
		KATUN I	3232	
		KATUN II	3233	
		KOWAN	3234	
		LSIL 351	3235	
		MIKHAIL RUDNITSKY	3236	
		OREL	3237	
		PAMIR	3238	
		PIAST	3239	
		PROTEO	3240	
		PS-11	3241	
		SAFEGUARD	3242	
		SILVA	3243	
		SPASILAC	3244	
		DISUSED	3245	
		US 149 FT	3246	
		YANDING	3247	
		UNDEFINED	3248 THROUGH 3273	
		ARSD GENERAL	3274	
		UNDEFINED	3275 THROUGH 3284	
		ASVR GENERAL	3285	

5.2-849

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 61)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1 -----	(CONTINUED)	
		UNDEFINED	3286 THROUGH 3295	
		AOS GENERAL	3296	
		ALATNA	3297	
		LUZA	3298	
		URAL	3299	
		VALA	3300	
		TONTI	3301	
		UNDEFINED	3302 THROUGH 3311	
		AF GENERAL	3312	
		CROITOR	3313	
		DANLIN	3314	
		MAYAK	3315	
		RIEGEL	3316	
		UNDEFINED	3317 THROUGH 3326	
		AKS GENERAL	3327	
		UNDEFINED	3328 THROUGH 3337	
		AKSL GENERAL	3338	
		UNDEFINED	3339 THROUGH 3348	
		AFL GENERAL	3349	
		UNDEFINED	3350 THROUGH 3359	
		ASR GENERAL	3360	
		ANTEO	3361	
		CHANTICLEER	3362	
		DAHIANG	3363	
		DALANG	3364	
		ELBRUS	3365	
		FEHMARN (TYPE 720B)	3366	
		FUSHIMI	3367	
		GALATI	3368	
		HUDONG	3369	
		KURTARAN	3370	
		NEPA	3371	
		PIGEON	3372	
		PRUT	3373	
		ROSLAVL	3374	
		SPASILAC	3375	
		VALDAY	3376	
		ZHONGHUA	3377	
		UNDEFINED	3378 THROUGH 3401	
		AS GENERAL	3402	
		ACHELOUS	3403	
		AEGIR	3404	

5.2-850

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 62)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		DISUSED	3405	
		ATREK	3406	
		CHIYODA	3407	
		DADONG	3408	
		DAZHOU	3409	
		DIVER	3410	
		DNEPR	3411	
		DNEPR (MODIFIED)	3412	
		DON	3413	
		EMORY S LAND	3414	
		FULTON	3415	
		HUNLEY	3416	
		L Y SPEAR	3417	
		PROTEUS	3418	
		DISUSED	3419	
		SIMON LAKE	3420	
		UGRA	3421	
		UNDEFINED	3422 THROUGH 3447	
		ASL GENERAL	3448	
		UNDEFINED	3449 THROUGH 3458	
		AGS GENERAL	3459	
		AGS 39 CLASS	3460	
		AKASHI	3461	
		ALMEIDA CARVALHO	3462	
		AMMIRAGLIO MAGNAGHI	3463	
		ANDRIJA MOHOROVICIC	3464	
		AUK	3465	
		BIYA	3466	
		BOLOGUE	3467	
		UNDEFINED	3468	
		BUYSKES	3469	
		C4-S-A1 TYPE (CONVERTED)	3470	
		CHAUVENET	3471	
		COOK	3472	
		DING HAI	3473	
		FINIK	3474	
		FS DESIGN 330	3475	
		FUTAMI	3476	
		HAMASHIO	3477	
		HEIYO	3478	
		KAIBOKAN I	3479	
		KAIYO	3480	

5.2-851

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 63)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1 -----	(CONTINUED)	
		KAMENKA	3481	
		DISUSED	3482	
		UNDEFINED	3483	
		L'ESPERANCE	3484	
		UNDEFINED	3485	
		LENTRA	3486	
		LSIL	3487	
		MEIYO	3488	
		MELITOPOL	3489	
		MOMA	3490	
		MONOWAI	3491	
		MORESBY	3492	
		MP-8	3493	
		MSC-294 (BLUEBIRD)	3494	
		NYRYAT I	3495	
		NYRYAT II	3496	
		SAMARA	3497	
		SHOYO	3498	
		SILAS BENT	3499	
		STERNE	3500	
		SUMA	3501	
		T-43	3502	
		TAKUYO	3503	
		TELNOVSK	3504	
		TELNOVSK (MODIFIED)	3505	
		TENYO	3506	
		VICTORY (CONVERTED)	3507	
		WILKES	3508	
		YANLAI	3509	
		YANXU	3510	
		MIRTO	3511	
		MARS	3512	
		LAPEROUSE	3513	
		UNDEFINED	3514 THROUGH 3579	
		AGSA GENERAL	3580	
		UNDEFINED	3581 THROUGH 3590	
		AGSC GENERAL	3591	
		EXPLORER	3592	
		FLINDERS	3593	
		TAINO	3594	
		BULLDOG	3595	
		ROEBUCK	3596	

5.2-852

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 64)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		UNDEFINED	3597 THROUGH 3604	
		AX GENERAL	3605	
		ARIS	3606	
		DISUSED	3607	
		JADRAN	3608	
		JERVIS BAY	3609	
		JOSE MARTI	3610	
		MP-8	3611	
		SMOLNY	3612	
		UGRA	3613	
		VIETNAM HEROICO	3614	
		WODNIK	3615	
		UNDEFINED	3616 THROUGH 3630	
		AXL GENERAL	3631	
		UNDEFINED	3632	
		LEOPARD	3633	
		MAYAK	3634	
		UNDEFINED	3635 THROUGH 3642	
		AXS GENERAL	3643	
		AMERIGO VESPUCCI	3644	
		CAROLY	3645	
		CARSARO II	3646	
		GORCH FOCK (TYPE 441A)	3647	
		MIRCEA	3648	
		PALINURO	3649	
		SAGRES	3650	
		STELLA POLARE	3651	
		UNDEFINED	3652 THROUGH 3659	
		AT GENERAL	3660	
		UNDEFINED	3661 THROUGH 3665	
		ATA GENERAL	3666	
		ABNAKI	3667	
		APACHE	3668	
		ARMY 254	3669	
		ATAK	3670	
		ATLANTE	3671	
		AZUMA	3672	
		BELIER	3673	
		UNDEFINED	3674	
		GAJ	3675	
		GNIEWKO	3676	
		GORYN	3677	

5.2-853

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 65)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		GROMOVOY	3678	
		KUDRET	3679	
		MAITO	3680	
		MB-31	3681	
		MB-65	3682	
		MOTYL	3683	
		OKHTENSKIY	3684	
		ONCU	3685	
		POWHATAN	3686	
		ROSLAVL	3687	
		ROYSTERER	3688	
		SAINT	3689	
		SCHULTZ XAVIER	3690	
		SORUM	3691	
		TENACE	3692	
		TUZHONG	3693	
		TYPHOON	3694	
		WANGEROOGE (TYPE 722B)	3695	
		ZENIT	3696	
		MAITO	3697	
		ARMEN	3698	
		UNDEFINED	3699	THROUGH 3737
		ATR GENERAL	3738	
		TENACE	3739	
		UNDEFINED	3740	THROUGH 3748
		ATS GENERAL	3749	
		EDENTON	3750	
		OKHTENSKY	3751	
		LANGE00G (TYPE 754)	3752	
		ARGUS	3753	
		UNDEFINED	3754	THROUGH 3762
		AWT GENERAL	3763	
		UNDEFINED	3764	
		BASENTO	3765	
		FUZHOU (MODIFIED)	3766	
		KANGAN	3767	
		LEIZHOU (MODIFIED)	3768	
		LSIL	3769	
		MANYCH	3770	
		MINCIO	3771	
		PIAVE	3772	
		TEVERE	3773	

5.2-854

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1 -----	(CONTINUED)	
		ULUBAT	3774	
		VODA	3775	
		YW-83	3776	
		Z	3777	
		UNDEFINED	3778 THROUGH 3797	
		SERVICE CRAFT GENERAL	3798	
		BARGE, GENERAL	3799	
		YO GENERAL	3800	
		YOG GENERAL	3801	
		YHT GENERAL	3802	
		YRNS GENERAL	3803	
		YOS GENERAL	3804	
		YPK GENERAL	3805	
		YRR GENERAL	3806	
		YRB GENERAL	3807	
		YRST GENERAL	3808	
		YOM GENERAL	3809	
		YOSS GENERAL	3810	
		YW GENERAL	3811	
		UNDEFINED	3812 THROUGH 3827	
		YD GENERAL	3828	
		YM GENERAL	3829	
		YFD GENERAL	3830	
		YFP GENERAL	3831	
		YGT GENERAL	3832	
		YR GENERAL	3833	
		UNDEFINED	3834 THROUGH 3840	
		YFD GENERAL	3841	
		YFDB GENERAL	3842	
		YFDM GENERAL	3843	
		YFDL GENERAL	3844	
		UNDEFINED	3845 THROUGH 3850	
		YRD GENERAL	3851	
		YRDB GENERAL	3852	
		YRDM GENERAL	3853	
		YRDL GENERAL	3854	
		UNDEFINED	3855 THROUGH 3861	
		LIGHTER GENERAL	3862	
		YE GENERAL	3863	
		YF GENERAL	3864	
		YFC GENERAL	3865	
		YFR GENERAL	3866	

FIELD CODING FOR J12.6C4

(SHEET 67)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		YC GENERAL	3867	
		YFT GENERAL	3868	
		UNDEFINED	3869	THROUGH 3878
		YT GENERAL	3879	
		YTB GENERAL	3880	
		YTM GENERAL	3881	
		YTL GENERAL	3882	
		UNDEFINED	3883	THROUGH 3892
		YAGF GENERAL	3893	
		YAG GENERAL	3894	
		YV GENERAL	3895	
		YNG GENERAL	3896	
		YP GENERAL	3897	
		YFU GENERAL	3898	
		YAM GENERAL	3899	
		YNC GENERAL	3900	
		YLC GENERAL	3901	
		YVS GENERAL	3902	
		YRG GENERAL	3903	
		YAGT GENERAL	3904	
		YPT GENERAL	3905	
		YRC GENERAL	3906	
		YDT GENERAL	3907	
		YNT GENERAL	3908	
		YH GENERAL	3909	
		YFB GENERAL	3910	
		YTR GENERAL	3911	
		YFL GENERAL	3912	
		YAC GENERAL	3913	
		YSR GENERAL	3914	
		YSG GENERAL	3915	
		YDG GENERAL	3916	
		KHABAROV	3917	
		UNDEFINED	3918	THROUGH 3936
		TM GENERAL	3937	
		TMD GENERAL	3938	
		TMB GENERAL	3939	
		TMK GENERAL	3940	
		TMF GENERAL	3941	
		TMC GENERAL	3942	
		TMCS GENERAL	3943	
		TMWW GENERAL	3944	

FIELD CODING FOR J12.6C4

(SHEET 68)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		TMA GENERAL	3945	
		TMH GENERAL	3946	
		TMGB GENERAL	3947	
		TMI GENERAL	3948	
		TML GENERAL	3949	
		TMOT GENERAL	3950	
		TMM GENERAL	3951	
		TMP GENERAL	3952	
		TMFR GENERAL	3953	
		TMR GENERAL	3954	
		TMOR GENERAL	3955	
		TMOL GENERAL	3956	
		TME GENERAL	3957	
		TMGS GENERAL	3958	
		TMLS GENERAL	3959	
		TMS GENERAL	3960	
		TMOS GENERAL	3961	
		TMO GENERAL	3962	
		TMX GENERAL	3963	
		TMWT GENERAL	3964	
		UNDEFINED	3965 THROUGH 3989	
		TMT GENERAL	3990	
		TMTR GENERAL	3991	
		TMTS GENERAL	3992	
		UNDEFINED	3993 THROUGH 4002	
		TU GENERAL	4003	
		TUF GENERAL	4004	
		TUB GENERAL	4005	
		TUI GENERAL	4006	
		TUR GENERAL	4007	
		TUT GENERAL	4008	
		TUS GENERAL	4009	
		TUC GENERAL	4010	
		TUW GENERAL	4011	
		UNDEFINED	4012 THROUGH 4023	
		TJ GENERAL	4024	
		TJF GENERAL	4025	
		TJC GENERAL	4026	
		TJCS GENERAL	4027	
		TJGB GENERAL	4028	
		UNDEFINED	4029 THROUGH 4038	
		TS GENERAL	4039	

FIELD CODING FOR J12.6C4

(SHEET 69)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1 -----	(CONTINUED)	
		TSG GENERAL	4040	
		TSR GENERAL	4041	
		UNDEFINED	4042 THROUGH 4052	
		MPS GENERAL	4053	
		UNDEFINED	4054 THROUGH 4069	
		SURFACE SPECIFIC TYPE 1-25	4070 THROUGH 4094	
		RESET TO NO STATEMENT	4095	

809	002	SUBSURFACE (MARITIME) AMBIGUOUS TYPE 1 -----		
-----	-----	--	--	--

IDENTIFIES THE TARGET SPECIFIC
TYPE AS DETERMINED BY AN ONBOARD
CORRELATION PROCESS IF THERE ARE
NO AMBIGUITIES. IDENTIFIES THE
MOST PROBABLE TARGET SPECIFIC
TYPE IF AN ONBOARD CORRELATION
PROCESS DETERMINED THAT THE
SPECIFIC TYPE IS AMBIGUOUS.
INFORMATION IN THIS FIELD SHALL
BE DERIVED ONLY FROM ONBOARD
SOURCES AS OPPOSED TO DATA LINK
SOURCES.

NO STATEMENT	0
SS GENERAL	1
ABTAO SS	2
DISUSED	3
DISUSED	4
UNDEFINED	5
DISUSED	6
GUPPY II SS	7
GUPPY IIA SS	8
GUPPY III SS	9
HAI LUNG SS	10
DISUSED	11
SAURO (TYPE 1081) SS	12
SAURO (IMPROVED) SS	13
TANG SS	14
TYPE SNA 72 SS	15
UZUSHIO SS	16
WALRUS SS	17
YUUSHIO SS	18
UNDEFINED	19
DISUSED	20

5.2-858

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 70)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
809	002	SUBSURFACE (MARITIME) AMBIGUOUS TYPE 1 -----	(CONTINUED)	
		PELOSI SS	21	
		UNDEFINED	22 THROUGH 360	
		SSB GENERAL	361	
		GOLF SSB	362	
		GOLF II SSB	363	
		GOLF III SSB	364	
		GOLF V SSB	365	
		UNDEFINED	366 THROUGH 440	
		SSBN GENERAL	441	
		BENJAMIN FRANKLIN SSBN	442	
		DELTA I SSBN	443	
		DELTA II SSBN	444	
		DELTA III SSBN	445	
		DELTA IV SSBN	446	
		HOTEL III SSBN	447	
		DISUSED	448	
		L'INFLEXIBLE SSBN	449	
		DISUSED	450	
		UNDEFINED	451	
		OHIO SSBN	452	
		RESOLUTION SSBN	453	
		TYPHOON SSBN	454	
		VANGUARD SSBN	455	
		YANKEE SSBN	456	
		YANKEE I SSBN	457	
		YANKEE II SSBN	458	
		XIA SSBN	459	
		LE TERRIBLE SSBN	460	
		UNDEFINED	461 THROUGH 720	
		SSN GENERAL	721	
		AKULA SSN	722	
		ALFA SSN	723	
		AMATHEPT SSN	724	
		CHARLIE/VICTOR SSGN/SSN	725	
		CHURCHILL SSN	726	
		ECHO/NOVEMBER SSGN/SSN	727	
		DISUSED	728	
		DISUSED	729	
		HAN SSN	730	
		HOTEL SSN	731	
		LOS ANGELES SSN	732	
		MIKE SSN	733	

5.2-859

MIL-STD-6016B

FIELD CODING FOR J12.6C4 (SHEET 71)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
809	002	SUBSURFACE (MARITIME) AMBIGUOUS TYPE 1 -----	(CONTINUED)	
		NARWHAL SSN	734	
		DISUSED	735	
		RUBIS SSN	736	
		SEAWOLF SSN	737	
		SIERRA SSN	738	
		DISUSED	739	
		DISUSED	740	
		STURGEON SSN	741	
		SWIFTSURE SSN	742	
		TRAFALGAR SSN	743	
		DISUSED	744	
		VICTOR I SSN	745	
		VICTOR II SSN	746	
		VICTOR III SSN	747	
		YANKEE SSN	748	
		VIRGINIA SSN	749	
		UNDEFINED	750 THROUGH 1200	
		SSG GENERAL	1201	
		JULIETT SSG	1202	
		UNDEFINED	1203 THROUGH 1245	
		SSGN GENERAL	1246	
		CHARLIE I SSGN	1247	
		CHARLIE II SSGN	1248	
		ECHO II SSGN	1249	
		OSCAR SSGN	1250	
		PAPA SSGN	1251	
		UNDEFINED	1252 THROUGH 1345	
		SSK GENERAL	1346	
		AGOSTA SSK	1347	
		UNDEFINED	1348	
		FOXTROT SSK	1349	
		HEROJ SSK	1350	
		KILO SSK	1351	
		MING SSK	1352	
		NARVAL SSK	1353	
		DISUSED	1354 THROUGH 1355	
		ROMEO SSK	1356	
		SAVA SSK	1357	
		SUTJESKA SSK	1358	
		TANGO SSK	1359	
		UPHOLDER SSK	1360	
		WHISKEY SSK	1361	

FIELD CODING FOR J12.6C4

(SHEET 72)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
809	002	SUBSURFACE (MARITIME) AMBIGUOUS TYPE 1 -----	(CONTINUED)	
		WHISKEY V SSK	1362	
		ZULU IV SSK	1363	
		DORIS SSK	1364	
		VICTORIA SSK	1365	
		TYPE 212 SSK	1366	
		UNDEFINED	1367 THROUGH 1665	
		SSC GENERAL	1666	
		DELFINEN SSC	1667	
		DRAKEN SSC	1668	
		NAECKEN SSC	1669	
		NARHVALEN SSC	1670	
		SJOORMEN SSC	1671	
		TOTI TYPE 1075 SSC	1672	
		TYPE 205 SSC	1673	
		TYPE 206 SSC	1674	
		KOBHEN SSC	1675	
		TYPE 209 (TYPE 1100) SSC	1676	
		TYPE 209 (TYPE 1200) SSC	1677	
		TYPE 209 (TYPE 1300) SSC	1678	
		TYPE 209 (TYPE 1400) SSC	1679	
		TYPE 209 (TYPE 1500) SSC	1680	
		ULA SSC	1681	
		TYPE 211 SSC	1682	
		VASTERGOETLAND SSC	1683	
		TYPE 206A SSC	1684	
		UNDEFINED	1685 THROUGH 1945	
		SSA GENERAL	1946	
		BRAVO SSA	1947	
		DOLPHIN (AGSS) SSA	1948	
		GOLF I SSA	1949	
		GOLF I (MODIFIED) SSA	1950	
		GOLF II SSA	1951	
		INDIA SSA	1952	
		LIMA SSA	1953	
		ROMEO SSA	1954	
		ZULU SSA	1955	
		UNDEFINED	1956 THROUGH 4069	
		SUBSURFACE SPECIFIC	4070 THROUGH 4094	
		TYPE 1-25		
		RESET TO NO STATEMENT	4095	

5.2-861

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 73)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	002	LAND (GROUND) AMBIGUOUS TYPE 1 -----		IDENTIFIES THE TARGET SPECIFIC TYPE AS DETERMINED BY AN ONBOARD CORRELATION PROCESS IF THERE ARE NO AMBIGUITIES. IDENTIFIES THE MOST PROBABLE TARGET SPECIFIC TYPE IF AN ONBOARD CORRELATION PROCESS DETERMINES THAT THE SPECIFIC TYPE IS AMBIGUOUS. INFORMATION IN THIS FIELD SHALL BE DERIVED ONLY FROM ONBOARD SOURCES AS OPPOSED TO DATA LINK SOURCES.
		NO STATEMENT	0	
		TOW	1	
		DRAGON	2	
		LANCE	3	
		SHILLEAGH	4	
		SERGEANT	5	
		AMMUNITION	6	
		POL	7	
		OBSERVATION POSTS	8	
		RADIO DIRECTION FINDER	9	
		RIVER	10	
		STREAM	11	
		LAKE	12	
		MARSH/SWAMP	13	
		MOUNTAIN	14	
		HILLTOP	15	
		RIDGE	16	
		DEPRESSION	17	
		VALLEY	18	
		CAVE	19	
		BRIDGE	20	
		DAM	21	
		BUILDING	22	
		VILLAGE	23	
		TOWN	24	
		ROAD INTERSECTION	25	
		HOSPITAL	26	
		HAWK	27	
		I-HAWK	28	
		PATRIOT	29	
		NIKE	30	
		REDEYE	31	
		STINKER	32	

5.2-862

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 74)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	002	LAND (GROUND) AMBIGUOUS TYPE 1 (CONTINUED)		

		HELLFIRE	33	
		PERSHING	34	
		JEEP	35	
		CAR	36	
		MOTORCYCLE	37	
		BICYCLE	38	
		AMPHIBIOUS VEHICLE	39	
		RIVER CROSSING EQUIPMENT	40	
		MECHANIZED MINE SWEEPER	41	
		MOBILE RADAR	42	
		SMOKE GENERATOR	43	
		(SSSB) SHIP SHORE SHIP	44	
		BUFFER		
		(RADIL) ROCC AWACS	45	
		DIGITAL INTERFACE LINK		
		(ASIT) ADAPTABLE SURFACE	46	
		INTERFACE TERMINAL		
		(AEGIS) AEW GROUND	47	
		INTERFACE SEGMENT		
		AMBULANCE	48	
		BIOLOGICAL WEAPONS	49	
		CHEMICAL WEAPONS	50	
		NUCLEAR WEAPONS	51	
		ENGINEER VEHICLES	52	
		GENERATOR	53	
		JAMMERS	54	
		MAINTENANCE VEHICLE	55	
		MULTIPLE ROCKET LAUNCHER	56	
		RADIO	57	
		REMOTE SENSOR	58	
		SELF PROPELLED ARTILLERY	59	
		TACTICAL BRIDGE	60	
		TOWED ARTILLERY GUN	61	
		RECOILLESS RIFLE	62	
		(TACCP) TACTICAL COMMAND	63	
		POST		
		BRIGADE	64	
		CORPS	65	
		GROUP	66	
		DIVISION	67	
		REGIMENT	68	
		BATTALION	69	
		COMPANY	70	

5.2-863

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 75)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	002	LAND (GROUND) AMBIGUOUS TYPE 1 (CONTINUED)		

		PLATOON	71	
		SQUADRON	72	
		AIRBASE	73	
		WING	74	
		ANTI-AIRCRAFT GUN	75	
		AIR DEFENSE ARTILLERY	76	
		GUN		
		MORTAR	77	
		FLAMETHROWER	78	
		TSC/MOCC/MARITIME	79	
		HEADQUARTERS		
		MAIN BATTLE TANK	80	
		MEDIUM TANK	81	
		LIGHT TANK	82	
		TRAIN	83	
		ARMORED PERSONNEL	84	
		VEHICLE		
		ARMORED INFANTRY	85	
		FIGHTING VEHICLE		
		LIGHT TRUCK	86	
		MEDIUM TRUCK	87	
		HEAVY TRUCK	88	
		TANK TRANSPORTER	89	
		DUMMY	90	
		TRAP	91	
		POINT TARGET	92	
		EA SITE	93	
		ARMORED PERSONNEL	94	
		CARRIER		
		ARMORED INFANTRY	95	
		FIGHTING VEHICLE		
		GCI SITE	96	
		CRC	97	
		TACC (AF)	98	
		CRP	99	
		TACC (MC)	100	
		MPC	101	
		TAOC	102	
		AADCCS (AN/TSQ-73)	103	
		DASC	104	
		FACP	105	
		FASC	106	
		AADCP	107	

5.2-864

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 76)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	002	LAND (GROUND) AMBIGUOUS TYPE 1 (CONTINUED)		

		ASRT	108	
		NCC	109	
		RCC	110	
		ROCC	111	
		DC	112	
		WOC	113	
		(ASOC) AIR SUPPORT	114	
		OPERATIONS CENTER		
		(TCO) TACTICAL COMBAT	115	
		OPERATIONS CENTER		
		(TOC) TACTICAL	116	
		OPERATIONS CENTER		
		(ARMY)		
		CHAPPARAL	117	
		FIRE DIRECTION CENTER	118	
		FIRE UNIT	119	
		DIVARTY	120	
		BATTERY	121	
		SELF-PROPELLED ARTILLERY	122	
		(GOC) GROUND OPERATIONS	123	
		CENTER		
		(ICC) INFORMATION	124	
		COORDINATION CENTER		
		(BOC) BATTERY OPERATIONS	125	
		CENTER		
		(ECS) ENGAGEMENT CONTROL	126	
		STATION		
		(PCP) PLATOON COMMAND	127	
		POST		
		(CRG) COMMUNICATIONS	128	
		RELAY GROUP		
		TUNNELS	129	
		RAILYARDS	130	
		BENCHMARK	131	
		TROOP	132	
		LANDING ZONE	133	
		DROP ZONE	134	
		ASSEMBLY OR STAGING AREA	135	
		DECONTAMINATION SITE	136	
		RE-ENTRY POINT/LINE	137	
		CROSSING AREA FOR		
		RECON PATROLS		
		SAM	138	

5.2-865

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 77)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	002	LAND (GROUND) AMBIGUOUS TYPE 1 (CONTINUED)		

		SSM	139	
		ANTI-TANK WEAPON	140	
		DIRECT SUPPORT	141	
		GENERAL SUPPORT	142	
		INTERCEPTION	143	
		BLOCKING	144	
		REINFORCING	145	
		REDEPLOYMENT	146	
		POLICING	147	
		INTRUDING	148	
		PREPARING BARRIER	149	
		DUMPING EQUIPMENT	150	
		RELIEF	151	
		CONVOY	152	
		ANTI-AIRCRAFT	153	
		AIR DEFENSE ARTILLERY	154	
		ARTILLERY	155	
		SURVEILLANCE	156	
		PICKETING	157	
		LOGISTICS SUPPORT	158	
		SEARCH	159	
		DIRECT ARTILLERY SUPPORT	160	
		GENERAL ARTILLERY	161	
		SUPPORT		
		MAINTAINING LINE OF	162	
		COMMUNICATION		
		COMMITTING	163	
		COUNTER-ATTACK	164	
		ELECTRONIC WARFARE	165	
		THREATEN	166	
		DESTROY	167	
		CONTACT	168	
		EVALUATION	169	
		TRANSPORTER	170	
		ARMORED VEHICLE	171	
		GUN	172	
		HALF TRACK	173	
		COMMUNICATIONS EQUIPMENT	174	
		TARGET	175	
		AIR DEFENSE SITE	176	
		FIM-92 STINGER	177	
		NIM-23 HAWK	178	
		MIM-42 REDEYE	179	

5.2-866

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 78)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	002	LAND (GROUND) AMBIGUOUS TYPE 1 (CONTINUED)		
		MIM-72 CHAPARRAL	180	
		MIM-104 PATRIOT	181	
		RIM-2 TERRIER	182	
		RIM-7 SEA SPARROW	183	
		RIM-8 TALOS	184	
		RIM-24 TARTAR	185	
		RIM-66 STANDARD MISSILE	186	
		RIM-67 STANDARD MISSILE	187	
		BLOWPIPE	188	
		DISUSED	189	THROUGH 190
		SEA DART	191	
		DISUSED	192	THROUGH 193
		CROTALE	194	
		RAPIER	195	
		RBS-70/GIRAFFE	196	
		SAM BLOODHOUND	197	
		SAM ROLAND	198	
		SA-2 GUIDELINE	199	
		SA-3 GOA	200	
		SA-4 GANEF	201	
		SA-N-3 GOBLET	202	
		SA-5 GAMMON	203	
		SA-N-4 GECKO	204	
		SA-6 GAINFUL	205	
		SA-N-6 GRUMBLE	206	
		SA-7 GRAIL	207	
		SA-8 GECKO	208	
		SA-9 GASKIN	209	
		SA-10 GRUMBLE	210	
		SA-11 GADFLY	211	
		SA-12	212	
		SA-13 GOPHER	213	
		MISTRAL	214	
		SA-N-7 GADFLY	215	
		SA-N-8 GREMLIN	216	
		SA-14 GREMLIN	217	
		SA-16 GIMLET	218	
		SA-X-17	219	
		TOC (THAAD)	220	
		SSI (THAAD)	221	
		LCS (THAAD)	222	
		LAUNCHER (THAAD)	223	
		TMD-GBR (THAAD)	224	

5.2-867

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	002	LAND (GROUND) AMBIGUOUS TYPE 1 (CONTINUED)		
		JTAGS	225	
		ADTOC/BN	226	
		ADTOC/BDE	227	
		ADCP	228	
		SM-2 BLOCK II	229	
		SM-2 BLOCK III	230	
		SM-2 BLOCK IIIA	231	
		SM-2 BLOCK IIIB	232	
		SM-2 BLOCK IV	233	
		SM-2 BLOCK IVA	234	
		SM-3 LEAP	235	
		SA-N-5 GRAIL	236	
		SA-N-11 GRISOM	237	
		SA-12A GLADIATOR	238	
		SA-12B GIANT	239	
		SA-14 GREMLIN	240	
		SA-15 GAUNTLET	241	
		SA-17 GRIZZLY	242	
		SA-N-12 GRIZZLY	243	
		SA-18 GROUSE	244	
		SA-19 GRISOM	245	
		RIM-116 RAM	246	
		ADATS	247	
		JAVELIN	248	
		STARBURST	249	
		STARSTREAK	250	
		ASPIDER	251	
		FRONT DOOR	252	
		ROLAND II	253	
		AKASH	254	
		ANZA	255	
		ANZA II	256	
		CSA-1	257	
		CSA-2	258	
		CSA-4	259	
		CSA-5	260	
		FM-80	261	
		HN-5	262	
		NK-7	263	
		NK-16	264	
		PANTZYR	265	
		RAPIER 2000/JERNAS	266	
		RBS-90	267	

FIELD CODING FOR J12.6C4

(SHEET 80)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	002	LAND (GROUND) AMBIGUOUS TYPE 1 (CONTINUED)		

		SAKR	268	
		SAVA	269	
		SHANINE	270	
		SKYGUARD ASPIDE	271	
		SPADA	272	
		TAM SAM	273	
		TIGERCAT	274	
		VANGUARD	275	
		SA-N-1 GOA	276	
		SA-N-9 GAUNTLET	277	
		SA-N-10	278	
		ALBATROS/ASPIDE	279	
		SM-1	280	
		SA-2 IRAQ MOD	281	
		SA-2 NORTH KOREA RO	282	
		AEGIS-TI	283	
		MASURGS	284	
		ROCK CAKE	285	
		SEA INDIGO	286	
		TANSAM	287	
		TOKEN A/D	288	
		GUARDSMAN	289	
		SILKWORM	290	
		SNOW DRIFT 11/17	291	
		TIGER S	292	
		TIGER G	293	
		TUBE ARM SA-11	294	
		SEACAT 262/903/904	295	
		AN/MPQ-4	296	
		AN-TPQ-36	297	
		AN/TPS-25	298	
		CYMBERLINE	299	
		PORK TROUGH 1	300	
		RASIT	301	
		SNAR-6	302	
		TALL MIKE	303	
		AN/FPN-33/36/40	304	
		AN/TPN-12/17	305	
		CPN-4, FPN-16/22	306	
		RP-2E	307	
		RP-4G	308	
		THD-1010/1013	309	
		TPN-8/14/18TSQ-7	310	

5.2-869

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 81)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	002	LAND (GROUND) AMBIGUOUS TYPE 1 (CONTINUED)		

		TWO SPOT	311	
		CSA-X-2	312	
		ASR-0	313	
		FALCON-G	314	
		MARCON LN66TPS66	315	
		SHEET BEND	316	
		WALL RUST A/B	317	
		DON-2	318	
		DONKAY/PALM FROND	319	
		EYE SHIELD	320	
		MARELD	321	
		PEEL PAIR	322	
		POT HEAD	323	
		RACAL-DECCA	324	
		RICE FIELD	325	
		RICE SCREEN	326	
		RICE CUP	327	
		SQUARE TIE	328	
		SS-N-2	329	
		STRUT CURVE	330	
		STRUT PAIR	331	
		BOFI	332	
		CORN CAN	333	
		DRUM TILT	334	
		ELDORADO	335	
		FLAP WHEEL	336	
		FLEDERMAUS	337	
		FLYCATCHER	338	
		GEPARD	339	
		GUN DISH	340	
		SPAAMG	341	
		TEAMPLAY	342	
		TEAMWORK	343	
		VULCAN	344	
		9LV 200	345	
		AN/SPG-50	346	
		BASS TILT	347	
		GOALKEEPER	348	
		HAWK SCREECH	349	
		KITE SCREECH A/B	350	
		OWL SCREECH	351	
		MARK 68 FCS	352	
		MK 57/63 GFCS	353	

FIELD CODING FOR J12.6C4

(SHEET 82)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	002	LAND (GROUND) AMBIGUOUS TYPE 1 (CONTINUED)		

		MK-86 GFCS	354	
		MUFF COB	355	
		SIGNAAL STIR 180	356	
		SUN VISOR	357	
		TOP BOW	358	
		TYPE 341	359	
		VEGA	360	
		WM-20 SERIES	361	
		MARCONI S613	362	
		THIN SKIN	363	
		AN/FPS-77	364	
		MRL-1	365	
		MRL-4/5	366	
		BIG BIRD	367	
		SIDE NET	368	
		ODD LOT/PAIR/GROUP	369	
		FIRE WHEEL/MOD	370	
		BARLOCK	371	
		FIRECAN/WHIFF	372	
		GIN SLING	373	
		FRUSKA GORA	374	
		TIN SHIELD	375	
		BIG BAR/MESH	376	
		SS-N-S SCOOP PAIR	377	
		SGR-105 DA-01/00	378	
		CROSS SLOT	379	
		BACK NET/TRAP	380	
		GATE POLE/HIGH/POST	381	
		TOP LOT	382	
		RICE CAKE	383	
		JY-14/9	384	
		TIN TRAP	385	
		HEAD NET A/B/C	386	
		SLIM/SEA/HAIR NET	387	
		LOW SIEVE	388	
		EGG CUP	389	
		CUT WEB	390	
		SKYWATCH	391	
		HALF PLATE	392	
		SKIN HEAD	393	
		SIEVE FAMILY	394	
		SO-A	395	
		HIGH SHELL	396	

5.2-871

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	002	LAND (GROUND) AMBIGUOUS TYPE 1 (CONTINUED)		

		AN/FPS-6/89	397	
		DECCA HF200	398	
		MARCONI 5244	399	
		TYPE 88 MK 1	400	
		MARCONI S-247	401	
		AN/MPN-11	402	
		RAT-31S	403	
		AA4 MK 6/7	404	
		AN/TPS-43	405	
		SCR-584	406	
		AN/TPS-48	407	
		MARCONI S-1006/269	408	
		PALMIER	409	
		FIREFINDER LR	410	
		VOLEX III/IV	411	
		THD-1940	412	
		HADR (HR-3000)	413	
		AN/RPS-70/72/75	414	
		MPDR-18/S	415	
		WATCHMAN	416	
		MARCONI S-631/647	417	
		MARCONI S-706/711/712	418	
		AN/TPS-73	419	
		TRS-22XX	420	
		AN/SPS-8	421	
		DECCA AWS-1	422	
		MK-26	423	
		AN/SPS-48	424	
		RAN-7S	425	
		SEA TIGER	426	
		DA-08/2LS	427	
		AWS-9 (TYPE 996)	428	
		DA-05/00	429	
		MPDR-45	430	
		TOP STEER/PLATE	431	
		STRIKE OUT	432	
		SPONGE CAKE	433	
		NC1 ROLAND	434	
		NC1 MISTRAL	435	
		FDOC	436	
		MCT	437	
		CETAC	438	
		ISARD	439	

FIELD CODING FOR J12.6C4

(SHEET 84)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

810	002	LAND (GROUND) AMBIGUOUS TYPE 1 (CONTINUED)		
-----	-----	--	--	--

UNDEFINED	440	THROUGH 4000
WAYPOINT	4001	
STRIKE INITIAL POINT	4002	
UNDEFINED	4003	THROUGH 4093
RESET TO NO STATEMENT	4094	
UNDEFINED	4095	

749	003	SPACE AMBIGUOUS TYPE 2		
-----	-----	------------------------	--	--

IDENTIFIES THE SECOND MOST PROBABLE
TARGET SPECIFIED TYPE IF AN
ONBOARD CORRELATION PROCESS
DETERMINES THAT THE SPECIFIC TYPE
IS AMBIGUOUS. INFORMATION IN
THIS FIELD SHALL BE DERIVED ONLY
FROM ONBOARD SOURCES AS OPPOSED
TO DATA LINK SOURCES.

NO STATEMENT	0	
FROG-7	1	
HONEST JOHN	2	
SAKR 80	3	
SS-21 MOD 2	4	
SS-21 MOD 3	5	
HAFT-I	6	
UNDEFINED	7	THROUGH 78
SHORT RANGE (0-65 DM)	79	
ALACRAN	80	
CHENG FENG	81	
CONDOR	82	
HAFT II	83	
IRAN-130	84	
LANCE	85	
MB/EE-150	86	
MB/EE-300	87	
UNDEFINED	88	
PRITHVI	89	
SS-1B (SCUD-A)	90	
SS-1C (SCUD-B)	91	
SS-21 (SCARAB)	92	
SS-300	93	
B-610/CJS-98 (BG510)	94	
NHK-I	95	
NHK-II (HYON MU)	96	
UNDEFINED	97	THROUGH 168

5.2-873

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 85)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
749	003	SPACE AMBIGUOUS TYPE 2	(CONTINUED)	

		SHORT-MEDIUM RANGE	169	
		(66-200 DM)		
		AL-HUSAYN	170	
		UNDEFINED	171	
		HAFT III	172	
		M-9	173	
		M-11	174	
		MB/EE-600	175	
		SCUD-C	176	
		SS-23 (SPIDER)	177	
		AL HUSSEIN	178	
		UNDEFINED	179	THROUGH 242
		MEDIUM RANGE (201-400	243	
		DM)		
		AL-ABBAS	244	
		JERICO-I	245	
		AL HIJARAN	246	
		SONDA IV	247	
		UNDEFINED	248	THROUGH 330
		MEDIUM-EXTENDED RANGE	331	
		(401-600 DM)		
		AL-FATAH	332	
		BADR-2000	333	
		CONDOR II	334	
		CSS-1	335	
		MB/EE-1000	336	
		SKY HORSE	337	
		SS-12A (SCALEBOARD A)	338	
		SS-12B (SCALEBOARD B)	339	
		SS1000	340	
		TIEN MA	341	
		UNDEFINED	342	THROUGH 416
		EXTENDED RANGE (601-800	417	
		DM)		
		ARNISTON	418	
		CAPRICORNIO	419	
		JERICO II	420	
		NODONG-1	421	
		SS-N-5 (SERB)	422	
		UNDEFINED	423	THROUGH 496
		EXTENDED-LONG RANGE	497	
		(801-1000 DM)		
		AGNI	498	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
749	003	SPACE AMBIGUOUS TYPE 2	(CONTINUED)	

		AL/ABED	499	
		CC-4 (SANDAL)	500	
		CSS-5	501	
		UNDEFINED	502 THROUGH 575	
		LONG RANGE (1001-1350 DM)	576	
		CHEVALINE	577	
		CSS-2	578	
		CSS-3	579	
		CSS-4	580	
		CSS-N-3	581	
		M-4 SLBM	582	
		M-5 SLBM	583	
		M-20 SLBM	584	
		MIDGETMAN	585	
		MINUTEMAN I	586	
		MINUTEMAN II	587	
		PEACEKEEPER	588	
		POLARIS A-3	589	
		POSEIDON C-3	590	
		SS-11 (SEGO)	591	
		SS-13 (SAVAGE)	592	
		SS-17 (SPANKER) MOD 1	593	
		SS-17 (SPANKER) MOD 2	594	
		SS-17 (SPANKER) MOD 3	595	
		SS-18 (SATAN) MOD 1	596	
		SS-18 (SATAN) MOD 2	597	
		SS-18 (SATAN) MOD 3	598	
		SS-20 (SABER)	599	
		SS-24 (SCALPEL)	600	
		SS-25 (SICKLE)	601	
		SS-N-6 (SAWFLY)	602	
		SS-N-8	603	
		SS-N-17 (SNIPE)	604	
		SS-N-18 (STINGRAY)	605	
		SS-N-20 (STURGEON)	606	
		SS-N-23 (SKIFF)	607	
		SSBS S-3	608	
		SSBS S-4	609	
		TRIDENT I (C-4)	610	
		TRIDENT II (D-5)	611	
		MODIFIED CSS-5	612	
		SS-19 MOD 3	613	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
749	003	SPACE AMBIGUOUS TYPE 2	(CONTINUED)	

		UNDEFINED	614	
		NEW SOLID SLBM	615	
		CSS-NX-3	616	
		M4B	617	
		M45	618	
		UNDEFINED	619 THROUGH 786	
		>1350 DM	787	
		ABM-1B (GALOSH)	788	
		ARROW	789	
		ASTER	790	
		CORPS SAM	791	
		ERINT	792	
		HAWK	793	
		PATRIOT	794	
		SA-10 (GRUMBLE)	795	
		SA-12A (GLADIATOR)	796	
		SA-12B (GIANT)	797	
		SA-N-6 (GRUMBLE)	798	
		SH-08 (GAZELLE)	799	
		STANDARD MISSILE BLOCK	800	
		IVA		
		THAAD	801	
		SM-2 BLOCK IV	802	
		SM-3 LEAP	803	
		UNDEFINED	804 THROUGH 876	
		INTERCEPTOR	877	
		OPERATIONAL COMMANDER	878 THROUGH 941	
		DEFINED 1-64		
		UNDEFINED	942 THROUGH 1022	
		BALLISTIC MISSILE	1023	
		GENERAL		
		UNDEFINED	1024 THROUGH 2046	
		SPACE GENERAL	2047	
		UNDEFINED	2048 THROUGH 4093	
		RESET TO NO STATEMENT	4094	
		UNDEFINED	4095	
804	003	AIR AMBIGUOUS TYPE 2		IDENTIFIES THE SECOND MOST PROBABLE TARGET SPECIFIC TYPE IF AN ONBOARD CORRELATION PROCESS DETERMINES THAT THE SPECIFIC TYPE IS AMBIGUOUS. INFORMATION IN THIS FIELD SHALL BE DERIVED ONLY

FIELD CODING FOR J12.6C4

(SHEET 88)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2 -----	(CONTINUED)	

FROM ONBOARD SOURCES AS OPPOSED
TO DATA LINK SOURCES.

NO STATEMENT	0
--------------	---

FIGHTER

F-4 PHANTOM II	1
F-5 TIGER II	2
F-8 CRUSADER	3
F-14 TOMCAT	4
F-15 EAGLE	5
F-16 FIGHTING FALCON	6
F-101 VOODOO	7
F-104 STARFIGHTER	8
F-105 THUNDERCHIEF	9
F-106 DELTA DART	10
F-111 (GENERAL DYNAMICS)	11
F/A-18 HORNET	12
EFA	13
F-102	14
F-100	15
DISUSED	16
DISUSED	17
COMMANDO	18
DISUSED	19
DISUSED	20
J-35 DRAKEN	21
JAGUAR	22
SUPER ETENDARD	23
DISUSED	24 THROUGH 26
F-1 (MITSUBISHI)	27
F-35XD DRAKEN	28
DISUSED	29
HF-24 MARUT (WIND SPIRIT)	30
JA37 VIGGEN	31
DISUSED	32
SF-5 FREEDOM FIGHTER	33
IAR-91 ORAO	34
AJEET INVINCIBLE	35
KFIR C2	36

5.2-877

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 89)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2	(CONTINUED)	

		MIRAGE F1	37	
		MIRAGE 3	38	
		MIRAGE 5	39	
		MIRAGE 50	40	
		MIRAGE 2000	41	
		DISUSED	42	
		DISUSED	43	
		ALPHA JET	44	
		KEFIR	45	
		F-6 FARMER	46	
		F-8 FISHBED	47	
		F-9 FANTAN	48	
		F-12 (CHINA)	49	
		SU-7 FITTER	50	
		SU-9 FISHPOT	51	
		SU-11 FLAGON	52	
		SU-15 FLAGON	53	
		SU-17 FITTER	54	
		SU-19 FENCER	55	
		SU-20 FITTER	56	
		SU-22 FITTER	57	
		SU-24 FENCER	58	
		SU-25 FROGFOOT	59	
		TU-28 FIDDLER	60	
		TU-128 FIDDLER	61	
		MIG-21 FISHBED	62	
		MIG-23 FLOGGER	63	
		MIG-25 FOXBAT	64	
		MIG-27 FLOGGER	65	
		YAK-28 FIREBAR	66	
		YAK-36 FORGER	67	
		AAF "RAM- J"	68	
		MIG-15 FAGOT	69	
		MIG-17 FRESCO	70	
		MIG-19 FARMER	71	
		SU-27 FLANKER	72	
		MIG-29 FULCRUM	73	
		MIG-31 FOXHOUND	74	
		YAK-38 FORGER-A	75	
		F-22 RAPTOR	76	
		F-84 THUNDERSTREAK	77	
		F-86 SABRE	78	
		F/A2 SEA HARRIER	79	

5.2-878

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 90)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2	(CONTINUED)	

		IDF CHING-KUO (TAIWAN)	80	
		JAS-39 GRIPPEN	81	
		JIAN JI-7	82	
		JIAN JI-8-2	83	
		JOINT STRIKE FIGHTER	84	
		KFIR C7	85	
		KFIR 2000	86	
		RAFALE	87	
		SU-30	88	
		SU-33 (SU-27K)	89	
		SU-34	90	
		SU-35	91	
		SU-37	92	
		SU-39	93	
		YAK-141 FREESTYLE	94	
		F-5 FRESCO	95	
		F-7 FISHBED	96	
		J-9	97	
		RT33	98	
		CF-188 HORNET	99	
		UNDEFINED	100	
		TORNADO F3	101	
		SEA HARRIER	102	
		F-5 NORTHROP	103	
		UNDEFINED	104 THROUGH 254	
		FIGHTER GENERAL	255	

		BOMBERS/ATTACK		

		A-4 SKYHAWK	256	
		A-6 INTRUDER	257	
		A-7 CORSAIR II	258	
		A-10 THUNDERBOLT II	259	
		A-37 DRAGONFLY	260	
		B-1 (ROCKWELL)	261	
		B-52 STRATOFORTRESS	262	
		AC-130 HERCULES	263	
		AV-8 HARRIER	264	
		F/A-18 HORNET	265	
		FB-111 (GENERAL DYNAMICS)	266	

FIELD CODING FOR J12.6C4

(SHEET 91)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2	(CONTINUED)	

		A-1	267	
		TA-28	268	
		DISUSED	269	
		AC-47	270	
		AC-119	271	
		AC-124	272	
		ALPHA JET	273	
		DISUSED	274	THROUGH 276
		35XD DRAGEN	277	
		J-1 HAWK	278	
		J-1 JAESTREB	279	
		S-2	280	
		AJ37 VIGGEN	281	
		HA220 SUPER SAETA	282	
		M.B.326 (AERMACCHI)	283	
		M.B.339 (AERMACCHI)	284	
		SF 260 WARRIER	285	
		SK 60 (SAAB)	286	
		BAC 167 STRIKEMASTER	287	
		TORNADO GR-1 (IDS)	288	
		IL-28 BEAGLE	289	
		MI-4 BISON	290	
		TU-16 BADGER	291	
		TU-22 BLINDER	292	
		TU-22M BACKFIRE	293	
		TU-95 BEAR	294	
		TU-142 BEAR	295	
		YAK-28 BREWER	296	
		SUPER ENTENDARD	297	
		TU-160 BLACKJACK	298	
		AMX	299	
		FRS1 SEA HARRIER	300	
		FRS2 SEA HARRIER	301	
		FRS51 SEA HARRIER	302	
		F-117 NIGHTHAWK	303	
		G4 SUPER GALEB	304	
		G91Y	305	
		HAWK-2000	306	
		HAWK-100	307	
		HAWK-200	308	
		HAWK-50	309	
		HAWK-60	310	
		IA-58 PUCARA	311	

FIELD CODING FOR J12.6C4

(SHEET 92)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2	(CONTINUED)	

		IAR-93 ORAO	312	
		IAR-99 SOIM	313	
		JIAN JI-5M	314	
		A-5 FANTAN	315	
		L59 ALBATROS	316	
		B-2 SPIRIT	317	
		B-7 HONGZHA	318	
		1050E	319	
		A3 LEI MING	320	
		HARRIER GR4/7	321	
		TORNADO GR4	322	
		AV-8B HARRIER PLUS	323	
		CF-188 HORNET	324	
		RAFALE	325	
		UNDEFINED	326 THROUGH 510	
		BOMBER/ATTACK GENERAL	511	

		PATROL/RECON/ELECTRONIC/ TANKER/GENERAL		

		E-2 HAWKEYE	512	
		E-3 SENTRY (AWACS)	513	
		E-4 NEACP	514	
		EA-3	515	
		EA-6 PROWLER	516	
		EB-57 (DOUGLAS)	517	
		EC-130 HERCULES	518	
		EC-135 (BOEING)	519	
		EF-4 WILD WEASEL	520	
		EF-111 (GENERAL DYNAMICS)	521	
		EP-3 ORION	522	
		KA-3 (DOUGLAS)	523	
		KA-6 (GRUMMAN)	524	
		KC-10 EXTENDER	525	
		KC-130 HERCULES	526	
		KC-135 STRATOTANKER	527	
		O-1 BIRD DOG	528	
		O-2 (CESSNA)	529	
		OV-1 MOHAWK	530	
		OV-10 BRONCO	531	

5.2-881

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 93)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2	(CONTINUED)	

		P-2 NEPTUNE	532	
		P-3 ORION	533	
		RC-130 HERCULES	534	
		RC-135 (BOEING)	535	
		RF-4 PHANTOM II	536	
		RF-5 (NORTHROP)	537	
		RF-8 CRUSADER	538	
		RF-14 TOMCAT	539	
		RF-104 STARFIGHTER	540	
		RP-3 ORION	541	
		RU-21 UTE	542	
		S-2 TRACKER	543	
		S-3 VIKING	544	
		SR-71 BLACKBIRD	545	
		U-2 (LOCKHEED)	546	
		U-4 AERO COMMANDER	547	
		U-5 H-500 TWIN	548	
		U-8 SEMINOLE	549	
		U-10 COURIER	550	
		UC-12 HURON	551	
		U-21 UTE	552	
		US-3 VIKING	553	
		OA-37 DRAGONFLY	554	
		TR-1	555	
		WC-130 HERCULES	556	
		E-1 TRACER	557	
		EB-66	558	
		EC-121	559	
		RA-3	560	
		SEA SCAN	561	
		FALCON 20 GUARDIAN	562	
		BR 1150 ATL1	563	
		RF-35XD DRAKEN	564	
		BN-2 MARITIME DEFENDER	565	
		DISUSED	566 THROUGH 567	
		CP-140 AURORA	568	
		HS.748 COASTGUARDER	569	
		HS.801 NIMROD	570	
		DISUSED	571	
		MK.3	572	
		RJ-1 HAWK	573	
		RJ-1 JAESTREB	574	
		SS-2	575	

5.2-882

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 94)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2	(CONTINUED)	

		PEACE SENTINEL	576	
		KC-97	577	
		AU-24	578	
		AU-23	579	
		U-21	580	
		U-17	581	
		HU-16	582	
		U-9	583	
		U-3	584	
		RU-21	585	
		NKC-135	586	
		RF-101	587	
		RF-111	588	
		RB-57	589	
		RB-66	590	
		RC-121	591	
		BE-12 MAIL	592	
		IL-38 MAY	593	
		TU-126 MOSS	594	
		BE-6	595	
		VC-10 (TANKER)	596	
		AN-12 CUB-A (ELINT)	597	
		AN-12 CUB-C (EA)	598	
		AN-12 CUB-D (EA)	599	
		IL-20 COOT-A (ELINT)	600	
		IL-76 MAINSTAY	601	
		E-8 (J STARS)	602	
		TORNADO ECR	603	
		E-6 MERCURY	604	
		EMB-111	605	
		MU-2S	606	
		A40 ALBATROS	607	
		BE42 ALBATROS	608	
		CL215 AMPHIBIAN	609	
		IAI 1125	610	
		IL22 COOT B	611	
		J32 LANSEN	612	
		SH5 HARBIN	613	
		TIER1	614	
		TIER2	615	
		TIER3	616	
		US1 (SHIN)	617	
		C-212 CASA	618	

5.2-883

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2	(CONTINUED)	

		CESSNA 550 CITATION II	619	
		CESSNA 560 CITATION V	620	
		CL 215 CANADAIR	621	
		DORNIER 27	622	
		F-27 FOKKER	623	
		NIMROD MRA4	624	
		CP-140A AURORA/ARCTURUS	625	
		RC-135 RIVET JOINT	626	
		ATL 2	627	
		ETENDARD IV P	628	
		ALIZE	629	
		FALCON 50	630	
		MIRAGE IV	631	
		MIRAGE 2000	632	
		BR 1150 GE ATL ASW	633	
		BR 1150 GE ATL SIGINT	634	
		C-130 HERCULES TANKER	635	
		ASTOR	636	
		UNDEFINED	637 THROUGH 761	
		TANKER	762	
		RECONNAISSANCE (RECON)	763	
		ELECTRONIC WARFARE (EW)	764	
		ASW	765	
		AEW AND C	766	
		MISCELLANEOUS GENERAL	767	

		TRAINER		

		T-2 BUCKEYE	768	
		T-28 TROJAN	769	
		T-29 (CONVAIR)	770	
		T-34 MENTOR	771	
		T-37 TWEET	772	
		T-38 TALON	773	
		T-39 SABERLINER	774	
		T-41 MESCALERO	775	
		T-42 CONCHISE	776	
		T-43 (BOEING)	777	
		T-44 KING AIR	778	
		TA-4 SKYHAWK	779	
		TA-7 CORSAIR II	780	

FIELD CODING FOR J12.6C4

(SHEET 96)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2	(CONTINUED)	

		T-33	781	
		ALPHA JET	782	
		B3LA (SAAB)	783	
		C-101 AVIOJET	784	
		G2-A GALEB	785	
		G2-A SEAGULL	786	
		L-29 DELFIN	787	
		L-29 MAYA	788	
		L-39 ALBATROS	789	
		L-70 MILTRAINER	790	
		L-450	791	
		P.55 (PARTENAVIA)	792	
		T-2 (MITSUBISHI)	793	
		CM 170 MAGISTER	794	
		M.B.339 (AERMACCHI)	795	
		T-2 (MITSUBISHI)	796	
		CM AU/ MAGISTER	797	
		M.B.339 (AERMACCHI)	798	
		SF-260 (SIAI-MARCHETTI)	799	
		SH 37 VIGGEN	800	
		QH-50 DRAKEN	801	
		SK 37 VIGGEN	802	
		SK 60 (SAAB)	803	
		TB30 EPSILON	804	
		TF-35XD	805	
		TJ-1 HAWK	806	
		TJ-1 JASTRAEB	807	
		TS.11 SPARK	808	
		AW1-2 FAN TRAINER	809	
		DISUSED	810	
		HJT-16 KIRAN	811	
		MBB223 FLAMINGO	812	
		SU-11 MAIDEN	813	
		SU-15	814	
		MIG-15 MIDGET	815	
		MIG-17	816	
		MIG-21 MONGOL	817	
		MIG-23	818	
		MIG-25	819	
		YAK-11 MOOSE	820	
		YAK-18 MAX	821	
		YAK-28 MAESTRO	822	
		TF-104 STARFIGHTER	823	

5.2-885

MIL-STD-6016B

FIELD CODING FOR J12.6C4 (SHEET 97)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2	(CONTINUED)	

		T-46A	824	
		EMB-312 TOUCAN	825	
		T-45 GOSHAWK	826	
		T-47	827	
		AS202	828	
		CT114 TUTOR	829	
		G91T (FIAT JET 1)	830	
		K8 (NAMC)	831	
		L70 VINKA	832	
		STRIKEMASTER (BAE)	833	
		T1 JAYHAWK	834	
		T4 (KAWASAKI)	835	
		CT-142 DASH 8	836	
		B-55 BARON	837	
		F-33 BONANZA	838	
		839 PILLAN-TAMIZ	839	
		CT-133 SILVERSTAR	840	
		UNDEFINED	841 THROUGH 1022	
		TRAINER GENERAL	1023	

		TRANSPORT/AIRLINER		

		C-1 (GRUMMAN COD)	1024	
		C-2 GREYHOUND	1025	
		C-5 GALAXY	1026	
		C-7 CARIBOU	1027	
		C-9 NIGHTINGALE	1028	
		C-12 HURON	1029	
		C-123 PROVIDER	1030	
		C-130 HERCULES	1031	
		C-135 STRATOLIFTER	1032	
		C-140 JETSTAR	1033	
		C-141 STARLIFTER	1034	
		HC-130 HERCULES	1035	
		VC-6 KING AIR	1036	
		VC-9 SKYTRAIN II	1037	
		VC-11 GULFSTREAM	1038	
		VC-137 (BOEING)	1039	
		707 (BOEING)	1040	
		720 (BOEING)	1041	
		727 (BOEING)	1042	

FIELD CODING FOR J12.6C4

(SHEET 98)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2	(CONTINUED)	

		737 (BOEING)	1043	
		747 (BOEING)	1044	
		757 (BOEING)	1045	
		767 (BOEING)	1046	
		L-100 HERCULES	1047	
		L-1011 TRI STAR	1048	
		DC-8 (DOUGLAS)	1049	
		DC-9 (DOUGLAS)	1050	
		DC-10 (DOUGLAS)	1051	
		C-119	1052	
		DC-130	1053	
		HC-97	1054	
		C-JM	1055	
		C-54	1056	
		C-97	1057	
		C-118	1058	
		C-119	1059	
		C-121	1060	
		C-124	1061	
		C-131	1062	
		C-133	1063	
		VC-47	1064	
		CV-54	1065	
		CV-140	1066	
		ARAVA	1067	
		CONCORDE	1068	
		ISLANDER	1069	
		SKYVAN	1070	
		TRIDENT	1071	
		A300 AIRBUS	1072	
		A310 AIRBUS	1073	
		C-1 (KAWASKI)	1074	
		C-160 TRANSALL	1075	
		C.207 AZOR	1076	
		C-212 AVIOCAR	1077	
		F27 FRIENDSHIPS	1078	
		F28 FELLOWSHIP	1079	
		G222 SAMA	1080	
		AW.660 ARGOSY	1081	
		BAC111 ONE-ELEVEN	1082	
		DHC-5 BUFFALO	1083	
		DHC-7 DASH	1084	
		AN-2 COLT	1085	

FIELD CODING FOR J12.6C4

(SHEET 99)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2	(CONTINUED)	

		AN-10 CAT	1086	
		AN-12 CUB	1087	
		AN-14 CLOD	1088	
		AN-22 COCK	1089	
		AN-24 COKE	1090	
		AN-26 CURL	1091	
		AN-28 CASK	1092	
		AN-30 CLANK	1093	
		AN-32 CLINE	1094	
		AN-40 (VERY LARGE TURBO- PROP)	1095	
		AN-72 COALER	1096	
		IL-12 COACH	1097	
		IL-18 COOT	1098	
		IL-62 CLASSIC	1099	
		IL-76 CANDID	1100	
		IL-86 CAMBER	1101	
		TU-114 CLEAT	1102	
		TU-134 CRUSTY	1103	
		TU-144 CHARGER	1104	
		TU-154 CARELESS	1105	
		YAK-40 CODDLING	1106	
		YAK-42 CLOBBER	1107	
		TU-104	1108	
		YAK-27	1109	
		IL-38	1110	
		DISUSED	1111	
		D0-228 LT (TRANSPORT)	1112	
		DISUSED	1113	
		AN-74	1114	
		AN-124 CONDOR	1115	
		A320 AIRBUS	1116	
		A321 AIRBUS	1117	
		A330 AIRBUS	1118	
		A340 AIRBUS	1119	
		AN-70	1120	
		AN-225 COSSACK	1121	
		BAE-125-600	1122	
		BAE146	1123	
		777 (BOEING)	1124	
		C-17 GLOBEMASTER III	1125	
		C-20 GULFSTREAM 3/4	1126	
		C-21 LEARJET 35	1127	

5.2-888

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 100)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2	(CONTINUED)	

		C-22	1128	
		C-23 SHERPA/SHORTS 330	1129	
		C-26 METRO 3	1130	
		YS 11 (NAMC)	1131	
		CL-600 CHALLENGER	1132	
		CL-601 CHALLENGER	1133	
		CN-235M (AIRTECH)	1134	
		EMB-120 BRASILLIA ADV	1135	
		EMB-145 AMAZON	1136	
		IL-78 MIDAS	1137	
		MD-11	1138	
		MD-80	1139	
		MD-90	1140	
		PD-808	1141	
		TU-44	1142	
		V-22 OSPREY	1143	
		VC-25	1144	
		XC-2	1145	
		1124 (IAI)	1146	
		1900 (BEECH)	1147	
		330 (SHORTS)	1148	
		580 (CONVAIR)	1149	
		ATR42	1150	
		B55 BARON	1151	
		BN2 ISLANDER	1152	
		C46 COMMANDO	1153	
		CARAVELL (SUD)	1154	
		CC109 (CANADAIR)	1155	
		CHALLENGER (CANADAIR)	1156	
		DHC2	1157	
		DHC6 TWIN OTTER	1158	
		DHC8	1159	
		EMB110 BANDEIRANTE	1160	
		EMB121	1161	
		FALCON 200/FALCON 20	1162	
		FALCON 50	1163	
		FALCON 900	1164	
		FH227 FRIENDSHIP	1165	
		FOKKER 100	1166	
		FOKKER 50	1167	
		FOKKER 60	1168	
		FOKKER 70	1169	
		GROB G850	1170	

FIELD CODING FOR J12.6C4

(SHEET 101)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2	(CONTINUED)	

		GULFSTREAM 1	1171	
		GULFSTREAM 2	1172	
		JETSTREAM	1173	
		JETSTREAM 31	1174	
		KING AIR	1175	
		L410 TURBOJET	1176	
		LEARJET 23	1177	
		LEARJET 24	1178	
		LEARJET 25 (IMPROVED VER 28)	1179	
		LEARJET 35/36	1180	
		LEARJET 55 (IMPROVED VER 28)	1181	
		LEARJET 60	1182	
		MERLIN 2	1183	
		MERLIN 3	1184	
		MERLIN 4	1185	
		METRO 3	1186	
		SAAB 2000	1187	
		SAAB 340	1188	
		SABRELINER	1189	
		U6 BEAVER	1190	
		VISCOUNT	1191	
		W3 SOKOL	1192	
		Y11 (HAMC)	1193	
		Y12 (HAMC)	1194	
		Y5	1195	
		CC-115 BUFFALO	1196	
		CC-130 HERCULES	1197	
		CC-150 POLARIS	1198	
		C-235 CASA	1199	
		CC-138 TWIN OTTER	1200	
		DO-228 LM (POLLUTION CONTROL)	1201	
		UNDEFINED	1202 THROUGH 1277	
		LIGHT CIVIL	1278	
		TRANSPORT/AIRLINER	1279	
		GENERAL		

		HELICOPTERS		

5.2-890

MIL-STD-6016B

FIELD CODING FOR J12.6C4 (SHEET 102)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2	(CONTINUED)	

		AH-1 COBRA	1280	
		AH-64 APACHE	1281	
		CH-3 (SIKORSKY)	1282	
		CH-46 (SEA KNIGHT)	1283	
		CH-47 CHINOOK	1284	
		CH-53 SEA STALLION	1285	
		CH-54 LARKE (SKYCRANE)	1286	
		EH-60 QUICK FOX	1287	
		HH-1 IROQUOIS	1288	
		HH-2 SEA SPRITE	1289	
		HH-3 JOLLY GREEN	1290	
		HH-52 (SIKORSKY)	1291	
		HH-53 (SIKORSKY)	1292	
		OH-6 (HUGHES)	1293	
		OH-58 KIOWA	1294	
		RH-3 SEA KING	1295	
		RH-53 (SIKORSKY)	1296	
		SH-2 SEA SPRITE	1297	
		SH-3 SEA KING	1298	
		SH-60 SEA HAWK	1299	
		UH-1 IROQUOIS	1300	
		UH-2 SEA SPRITE	1301	
		UH-12 (HILLER)	1302	
		UH-46 (BOEING)	1303	
		UH-60 BLACK HAWK	1304	
		CH-2U	1305	
		HH-43	1306	
		A109 (AGUSTA)	1307	
		A129 MONGOOSE	1308	
		B0-105 (MBB)	1309	
		DISUSED	1310	
		CH-124 SEA KING	1311	
		DISUSED	1312 THROUGH 1314	
		SA 315 LAMA	1315	
		DISUSED	1316	
		DISUSED	1317	
		SA 321 SUPER FRELON	1318	
		SA 330 PUMA	1319	
		SA 332 SUPER PUMA	1320	
		S 342 GAZELLE	1321	
		SA 350 ASTAR	1322	
		SA 360 DAUPHIN	1323	
		SA 361 DAUPHIN	1324	

FIELD CODING FOR J12.6C4

(SHEET 103)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2	(CONTINUED)	

		WG-13 LYNX	1325	
		WG-34 (WESTLAND)	1326	
		KA-18 HOG	1327	
		KA-20 HARP	1328	
		KA-25 HORMONE	1329	
		KA-26 HOODLUM	1330	
		MI-1 HARE	1331	
		MI-2 HOPLITE	1332	
		MI-4 HOUND	1333	
		MI-6 HOOK	1334	
		MI-8 HIP	1335	
		MI-10 HARKE	1336	
		MI-12 HOMER	1337	
		MI-14 HAZE	1338	
		MI-24 HIND	1339	
		MI-26 HALO	1340	
		CH-53E SUPER STALLION	1341	
		MH-53E SEA DRAGON	1342	
		HH-60 NIGHT HAWK	1343	
		HH-65A DOLPHIN	1344	
		KA-27 HELIX-A (ASW)	1345	
		KA-32 HELIX	1346	
		MI-17 HIP-H	1347	
		MI-28 HAVOC	1348	
		ECUREUIL/FENNEL/ESQILO	1349	
		KA-29 HELIX-B	1350	
		KA-50 HOKUM	1351	
		204 BELL	1352	
		205 BELL	1353	
		206 BELL	1354	
		214 BELL	1355	
		280 ENSTROM	1356	
		300 SCHWEIZER	1357	
		406 COMBAT SCOUT	1358	
		A 109 HIRUNDO	1359	
		A 129 MANGUSTA	1360	
		AH 6 CAYUSE	1361	
		ALOUETTE 2	1362	
		ALOUETTE 3	1363	
		AS 350 ECUREUIL	1364	
		AS 532 COUGAR	1365	
		AS 550 FENNEC	1366	
		AS 555 FENNEC	1367	

FIELD CODING FOR J12.6C4

(SHEET 104)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2	(CONTINUED)	

		AS 565 PANTHER	1368	
		CH 34 WESTLAND	1369	
		EH 101	1370	
		HAS 1 WASP	1371	
		KA-28 HELIX A	1372	
		MD 500 DEFENDER	1373	
		MI 22	1374	
		MI 25	1375	
		MI 35	1376	
		MI 9	1377	
		SA 341 GAZELLE	1378	
		SA 342 GAZELLE	1379	
		SA 365 DAUPHIN 2	1380	
		TS11 ISKRA	1381	
		WESSEX	1382	
		Z9 (HARBIN)	1383	
		CH-146 GRIFFON	1384	
		SEA KING AEW (SKW)	1385	
		EH 101 MERLIN	1386	
		AB-212 AUGUSTA BELL	1387	
		BO-105 BOLKOW	1388	
		CH-47 CHINOOK	1389	
		HUGHES 500	1390	
		HUGHES 3000	1391	
		SH-3D SIKORSKY	1392	
		SH-70L SIKORSKY	1393	
		CH-113 LABRADOR	1394	
		NH 90 (C2)	1395	
		NH 90 (RECCE)	1396	
		NH 90 (EW/SEAD)	1397	
		NH 90 (TRANSPORT)	1398	
		SEA LYNX MK88A	1399	
		SEA KING MK41 (KWS)	1400	
		TIGER (HAP)	1401	
		NH 90 (NAVY)	1402	
		TIGER (HAC)	1403	
		SA 341 GAZELLE CANON	1404	
		AS 532 COUGAR HORIZON	1405	
		AW-520 SAR CORMORANT	1406	
		UNDEFINED	1407 THROUGH 1534	
		HELICOPTER GENERAL	1535	

5.2-893

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2	(CONTINUED)	

		AIR-AIR MISSILES		

		AIM-4A FALCON	1536	
		AIM-7 SPARROW	1537	
		AIM-9 SIDEWINDER	1538	
		AIM-54 PHOENIX	1539	
		AIM-2A GENIE	1540	
		AIM-120 AMRAAM	1541	
		ASLAM	1542	
		R.530	1543	
		R.550 MAGIC	1544	
		S.530 SUPER 530	1545	
		ASPIDER	1546	
		DISUSED	1547	
		SHAFRIR	1548	
		SKY FLASH	1549	
		DISUSED	1550	
		AA-2 ATOLL	1551	
		AA-3 ANAB	1552	
		AA-5 ASH	1553	
		AA-6 ACRID	1554	
		AA-7 APEX	1555	
		AA-8 APHID	1556	
		AAM	1557	
		AA-9 AMOS	1558	
		AA-XP-1/2	1559	
		AQM-34	1560	
		AQM-91	1561	
		BGM-34 FIREBEE/MQM34	1562	
		YQM-94	1563	
		YQM-98	1564	
		AIM-132 ASRAAM	1565	
		MICA	1566	
		PL-2A	1567	
		PL-5B	1568	
		PL-7	1569	
		PL-9	1570	
		PYTHON 3	1571	
		PYTHON 4	1572	
		AA-10 ALAMO	1573	
		AA-11 ARCHER	1574	

FIELD CODING FOR J12.6C4

(SHEET 106)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2	(CONTINUED)	

		AA-12 ADDER	1575	
		AA-1 ALKALI	1576	
		AAM-1	1577	
		UNDEFINED	1578 THROUGH 1790	
		AIR-TO-AIR MISSILE	1791	
		GENERAL		

		AIR-GROUND/GROUND-		
		GROUND MISSILES		

		AGM-45 SHRIKE	1792	
		AGM-65 MAVERICK	1793	
		AGM-69 SRAM	1794	
		AGM-78 STANDARD ARM	1795	
		AGM-84 HARPOON	1796	
		AGM-86 ALCM	1797	
		AGM-88 HARM	1798	
		AGM-109 TOMAHAWK	1799	
		AM 39 EXOCET	1800	
		AGM-119 PENGUIN	1801	
		AS 11 KILTER	1802	
		AS 12 KEGLER	1803	
		AS 15 KENT	1804	
		AS 30	1805	
		DISUSED	1806	
		RB 05	1807	
		RB 08	1808	
		ADVANCED ASM	1809	
		AS-1 KENNEL	1810	
		AS-2 KIPPER	1811	
		AS-3 KANGAROO	1812	
		AS-4 KITCHEN	1813	
		AS-5 KELT	1814	
		AS-6 KINGFISH	1815	
		AS-7 KERRY	1816	
		DISUSED	1817	
		AS-10 KAREN	1818	
		AS-9 KYLE	1819	
		AS 34 KORMORAN	1820	
		ASM GABRIEL	1821	
		ASM SEA SKUA	1822	

5.2-895

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 107)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2	(CONTINUED)	

		ASM SEA EAGLE	1823	
		ASMP	1824	
		AT-2 SWATTER	1825	
		AT-3 SAGGER	1826	
		AT-6 SPIRAL	1827	
		C-601	1828	
		C-611	1829	
		C-801	1830	
		C-802	1831	
		CSS-2	1832	
		CSS-3	1833	
		CSS-N-3	1834	
		CSS-X-4	1835	
		FL-2 SILKWORM	1836	
		FL-7	1837	
		HY-2	1838	
		HY-3	1839	
		M-9/11	1840	
		WS-1	1841	
		AS-13 KINGBOLT	1842	
		AS-14 KEDGE	1843	
		AS-16 KICKBACK	1844	
		AS-17 KRYPTON	1845	
		AS-18 KAZOO	1846	
		AT-4 SPIGOT	1847	
		AT-5 SPANDREL	1848	
		AT-7 SAXHORN	1849	
		AT-10 STABBER	1850	
		AT-11 SNIPER	1851	
		AT-12	1852	
		AT-13	1853	
		AT-14	1854	
		FROG-7	1855	
		SS-1 SCUD	1856	
		SS-11 SEGO	1857	
		SS-13 SAVAGE	1858	
		SS-18 SATAN	1859	
		SS-19 STILETTO	1860	
		SS-24 SCALPEL	1861	
		SS-25 SICKLE	1862	
		SS-N-2 STYX	1863	
		SS-N-3 SHADDOCK	1864	
		SS-N-6 SERB	1865	

FIELD CODING FOR J12.6C4

(SHEET 108)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2	(CONTINUED)	

		SS-N-7 STARBRIGHT	1866	
		SS-N-8 SAWFLY	1867	
		SS-N-9 SIREN	1868	
		SS-N-12 SANDBOX	1869	
		SS-N-18 STINGRAY	1870	
		SS-N-19 SHIPWRECK	1871	
		SS-N-20 STURGEON	1872	
		SS-N-21 SAMPSON	1873	
		SS-N-22 SUNBURN	1874	
		SS-N-23 SKIFF	1875	
		SS-N-26	1876	
		AGNI	1877	
		PRITHVI	1878	
		TOW	1879	
		AGM-114 HELLFIRE	1880	
		MLRS	1881	
		HOT	1882	
		MILAN	1883	
		TRIGAT	1884	
		OTOMAT	1885	
		RBS-15M	1886	
		ARMAT	1887	
		ALARM	1888	
		AGM-12 BULLPUP	1889	
		AGM-62A WALLEYE	1890	
		AGM-123A SKIPPER II	1891	
		APACHE (ASM)	1892	
		AS 8	1893	
		AT-1 SWATTER	1894	
		CAS1	1895	
		KH-41 MOSKIT	1896	
		MARTIN PESCADOR	1897	
		MAS1 CARCARA	1898	
		RB 04E	1899	
		STAR	1900	
		SEA INDIGO	1901	
		MM 38	1902	
		MM 40	1903	
		SM 39	1904	
		AS 34 KORMORAN II	1905	
		UNDEFINED	1906 THROUGH 2046	
		AIR-GROUND MISSILE	2047	
		GENERAL		

FIELD CODING FOR J12.6C4

(SHEET 109)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2	(CONTINUED)	

		SURFACE TO AIR MISSILES		

		FIM-92 STINGER	2048	
		NIM-23 HAWK	2049	
		MIM-42 REDEYE	2050	
		MIM-72 CHAPARRAL	2051	
		MIM-104 PATRIOT	2052	
		RIM-2 TERRIER	2053	
		RIM-7 SEA SPARROW	2054	
		RIM-8 TALOS	2055	
		RIM-24 TARTAR	2056	
		RIM-66 STANDARD MISSILE	2057	
		RIM-67 STANDARD MISSILE	2058	
		BLOWPIPE	2059	
		DISUSED	2060 THROUGH 2061	
		SEA DART	2062	
		DISUSED	2063	
		SEA WOLF	2064	
		S 440 CROTALE EDIR	2065	
		RAPIER	2066	
		RBS-70 (SLM)	2067	
		DISUSED	2068	
		SAM ROLAND	2069	
		SA-2 GUIDELINE	2070	
		SA-3 GOA	2071	
		SA-4 GANEF	2072	
		SA-N-3 GOBLET	2073	
		SA-5 GAMMON	2074	
		SA-N-4 GECKO	2075	
		SA-6 GAINFUL	2076	
		SA-N-6 GRUMBLE	2077	
		SA-7 GRAIL	2078	
		SA-8 GECKO	2079	
		SA-9 GASKIN	2080	
		SA-10 GRUMBLE	2081	
		SA-11 GADFLY	2082	
		SA-12	2083	
		SA-13 GOPHER	2084	
		MISTRAL	2085	
		SA-N-7 GADFLY	2086	
		SA-N-8 GREMLIN	2087	

FIELD CODING FOR J12.6C4

(SHEET 110)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2	(CONTINUED)	

		SA-14 GREMLIN	2088	
		SA-16 GIMLET	2089	
		SA-X-17	2090	
		SA-N-5 GRAIL	2091	
		SA-N-11 GRISOM	2092	
		SA-12A GLADIATOR	2093	
		SA-12B GIANT	2094	
		SA-14 GREMLIN	2095	
		SA-15 GAUNTLET	2096	
		SA-17 GRIZZLY	2097	
		SA-N-12 GRIZZLY	2098	
		SA-18 GROUSE	2099	
		SA-19 GRISOM	2100	
		RIM-116 RAM	2101	
		ADATS	2102	
		JAVELIN	2103	
		STARBURST	2104	
		STARSTREAK	2105	
		ASPIDER	2106	
		I-HAWK	2107	
		ROLAND II	2108	
		SM-2 BLOCK II	2109	
		SM-2 BLOCK III	2110	
		SM-2 BLOCK IIIA	2111	
		SM-2 BLOCK IIIB	2112	
		SM-2 BLOCK IV	2113	
		SM-2 BLOCK IVA	2114	
		SM-3 LEAP	2115	
		AKASH	2116	
		ANZA	2117	
		ANZA II	2118	
		CSA-1	2119	
		CSA-2	2120	
		CSA-4	2121	
		CSA-5	2122	
		FM-80	2123	
		HN-5	2124	
		NK-7	2125	
		NK-16	2126	
		PANTZYR	2127	
		RAPIER 2000/JERNAS	2128	
		RBS-90	2129	
		SAKR	2130	

FIELD CODING FOR J12.6C4 (SHEET 111)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

804	003	AIR AMBIGUOUS TYPE 2 -----	(CONTINUED)	
		SAVA	2131	
		SHANINE	2132	
		SKYGUARD ASPIDE	2133	
		SPADA	2134	
		TAM SAM	2135	
		TIGERCAT	2136	
		VANGUARD	2137	
		SA-N-1 GOA	2138	
		SA-N-9 GAUNTLET	2139	
		SA-N-10	2140	
		ALBATROS/ASPIDE	2141	
		SM-1	2142	
		VT1 CROTALE	2143	
		MASURCA	2144	
		ASTER 15	2145	
		ASTER 30	2146	
		UNDEFINED	2147 THROUGH 4093	
		RESET TO NO STATEMENT	4094	
		SURFACE-TO-AIR MISSILE GENERAL	4095	

808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2 -----		IDENTIFIES THE SECOND MOST PROBABLE TARGET SPECIFIC TYPE IF AN ONBOARD CORRELATION PROCESS DETERMINES THAT THE SPECIFIC TYPE IS AMBIGUOUS. INFORMATION IN THIS FIELD SHALL BE DERIVED ONLY FROM ONBOARD SOURCES AS OPPOSED TO DATA LINK SOURCES.
		NO STATEMENT	0	
		CV GENERAL	1	
		CLEMENCEAU	2	
		ENTERPRISE	3	
		FORRESTAL	4	
		JOHN F KENNEDY	5	
		KITTY HAWK	6	
		MIDWAY	7	
		NIMITZ	8	
		CHARLES DE GAULLE	9	
		UNDEFINED	10 THROUGH 21	
		CVS GENERAL	22	
		DEDALO	23	
		MINAS GERAIS	24	

FIELD CODING FOR J12.6C4

(SHEET 112)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		VIKRANT	25	
		VEINTICINCO DE MAYO	26	
		VIRAAT	27	
		UNDEFINED	28 THROUGH 35	
		CVH GENERAL	36	
		GIUSEPPE GARIBALDI	37	
		INVINCIBLE	38	
		JEANNE D'ARC	39	
		KIEV	40	
		PRINCIPE DE ASTURIAS	41	
		UNDEFINED	42	
		KIEV (MODIFIED)	43	
		UNDEFINED	44 THROUGH 52	
		BB GENERAL	53	
		IOWA	54	
		UNDEFINED	55 THROUGH 64	
		CC GENERAL	65	
		SVERDLOV (MODIFIED)	66	
		UNDEFINED	67 THROUGH 76	
		CG GENERAL	77	
		ANDREA DORIA	78	
		BAINBRIDGE	79	
		BELKNAP	80	
		CALIFORNIA	81	
		UNDEFINED	82	
		KARA	83	
		KIROV	84	
		KRESTA I	85	
		KRESTA II	86	
		KYNDA	87	
		LEAHY	88	
		LONG BEACH	89	
		SLAVA	90	
		TICONDEROGA	91	
		TRUXTUN	92	
		VIRGINIA	93	
		VITTORIO VENETO	94	
		UNDEFINED	95 THROUGH 118	
		CH GENERAL	119	
		MOSKVA	120	
		UNDEFINED	121 THROUGH 130	
		CA GENERAL	131	

FIELD CODING FOR J12.6C4 (SHEET 113)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		UNDEFINED	132	
		SVERDLOV	133	
		UNDEFINED	134 THROUGH 143	
		DD GENERAL	144	
		AKIZUKI	145	
		ALLEN M SUMNER	146	
		ALLEN M SUMNER FRAM II	147	
		ALMIRANTE	148	
		AMATSUKAZE	149	
		ANIMOSO	150	
		ANSHAN	151	
		ARLEIGH BURKE	152	
		ASAGARI	153	
		UNDEFINED	154	
		AUDACE	155	
		AYANAMI	156	
		DISUSED	157	
		CARPENTER FRAM I	158	
		CHARLES F ADAMS (MOD)	159	
		CHARLES F ADAMS	160	
		COONTZ	161	
		DISUSED	162 THROUGH 163	
		UNDEFINED	164	
		FLETCHER	165	
		FORREST SHERMAN (MOD) & HULL	166	
		FRIESLAND	167	
		GEARING FRAM I	168	
		GEARING FRAM II	169	
		UNDEFINED	170	
		DISUSED	171	
		HARUNA	172	
		HATAKAZE	173	
		HATSUYUKI	174	
		IMPAVIDO	175	
		KANIN	176	
		KASHIN (MODIFIED)	177	
		KASHIN	178	
		KASHIN II	179	
		KIDD	180	
		UNDEFINED	181	
		KILDIN (MODIFIED)	182	

FIELD CODING FOR J12.6C4

(SHEET 114)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		KOTLIN	183	
		KOTLIN (MODIFIED)	184	
		LUDA (TYPE 051)	185	
		MEKO 360	186	
		MINEGUMO	187	
		PROJECT 15	188	
		ROBERT H SMITH	189	
		ROGER D LAURIA	190	
		SAM KOTLIN	191	
		SHIRANE	192	
		SKORY	193	
		SOVREMENYY	194	
		SPRUANCE	195	
		SUFFREN	196	
		TACHIKAZE	197	
		TAKATSUKI	198	
		TYPE 42	199	
		DISUSED	200	
		DISUSED	201	
		TYPE F-70 (AAW)	202	
		TYPE F-70 (ASW)	203	
		TYPE F-67	204	
		UNDEFINED	205	THROUGH 206
		TYPE T-53 (MODIFIED-ASW)	207	
		UNDEFINED	208	
		UDALOY	209	
		YAMAGUMO	210	
		Z	211	
		IROQUOIS	212	
		UNDEFINED	213	THROUGH 276
		DE GENERAL	277	
		UNDEFINED	278	
		CASTLE	279	
		UNDEFINED	280	THROUGH 295
		FF GENERAL	296	
		ALMIRANTE CLEMENTE	297	
		ALMIRANTE PEREIRA DA SILVA	298	
		ALPINO	299	
		DISUSED	300	THROUGH 301
		BALEARES	302	
		BAPTISTA DE ANDRADE	303	

5.2-903

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 115)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		UNDEFINED	304	
		BERK	305	
		BLACK SWAN	306	
		BROADSWORD (TYPE 22)	307	
		BRONSTEIN	308	
		BROOKE	309	
		CANNON	310	
		CHARLES LAWRENCE	311	
		CHENGDU	312	
		CHIKUGO	313	
		COMANDANTE JOAO BELO	314	
		UNDEFINED	315	
		CROSLEY	316	
		DEALEY	317	
		DESCUBIERTA	318	
		DUKE (TYPE 23)	319	
		DURANGO	320	
		EDSALL	321	
		GARCIA	322	
		GLOVER	323	
		GODAVARI	324	
		GRISHA I	325	
		GRISHA II	326	
		GRISHA III	327	
		UNDEFINED	328	
		GRISHA V	329	
		UNDEFINED	330	
		HVIDBJORNEN	331	
		ISHKARI	332	
		ISUZU	333	
		JACOB VAN HEEMSKERCK	334	
		JIANGDONG (TYPE 053J)	335	
		JIANGHU (TYPE 053H)	336	
		JIANGNAN	337	
		JOAO COUTINHO	338	
		KAREL DOORMAN	339	
		KNOX	340	
		DISUSED	341	
		KONI	342	
		KORTENAER	343	
		KRIVAK I	344	
		KRIVAK II	345	

FIELD CODING FOR J12.6C4

(SHEET 116)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		KRIVAK III	346	
		LA FAYETTE	347	
		DISUSED	348	
		LEOPARD	349	
		LUPU	350	
		M	351	
		DISUSED	352	
		MAESTRALE	353	
		MEKO 140 TYPE	354	
		MEKO 200 TYPE	355	
		MIRKA I	356	
		MIRKA II	357	
		NIELS JUEL	358	
		NITEROI	359	
		OLIVER HAZARD PERRY	360	
		OSLO	361	
		PEDER SKRAM	362	
		PETYA I (MODIFIED)	363	
		PETYA I	364	
		PETYA II (MODIFIED)	365	
		PETYA II	366	
		PETYA III	367	
		UNDEFINED	368	
		DISUSED	369	
		RIGA	370	
		RIVER	371	
		BRANDENBURG (TYPE 123)	372	
		RUDDEROW	373	
		SACHSEN (TYPE 124)	374	
		SAVAGE	375	
		DISUSED	376	
		TROMP	377	
		TYPE A 69	378	
		TYPE F-2000S	379	
		UNDEFINED	380 THROUGH 381	
		YUBARI	382	
		BREMEN (TYPE 122)	383	
		CLAUDE JONES	384	
		FFG 7	385	
		HALIFAX	386	
		NAJIN	387	
		PRESIDENT	388	

FIELD CODING FOR J12.6C4

(SHEET 117)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		SANTA MARIA	389	
		VOSPER MK 5	390	
		VOSPERTHORNYCROFT MK 7	391	
		WIELINGEN	392	
		FLOREAL	393	
		COMMANDANT BORY	394	
		UNDEFINED	395 THROUGH 478	
		FS GENERAL	479	
		ALBATROS	480	
		AUK CLASS	481	
		DE CRISTOFARO	482	
		DISUSED	483	
		MINERVA	484	
		NANUCHKA I	485	
		NANUCHKA II	486	
		NANUCHKA III	487	
		DISUSED	488	
		PF-103	489	
		SAAR 5	490	
		SLEIPNER	491	
		TARANTUL I	492	
		TARANTUL II	493	
		DISUSED	494	
		WADI	495	
		UNDEFINED	496 THROUGH 517	
		LL GENERAL	518	
		UNDEFINED	519 THROUGH 528	
		LCC GENERAL	529	
		BLUE RIDGE	530	
		CAVEZZALE	531	
		UNDEFINED	532 THROUGH 540	
		LKA GENERAL	541	
		CHARLESTON	542	
		UNDEFINED	543 THROUGH 552	
		LFS GENERAL	553	
		UNDEFINED	554 THROUGH 563	
		LHA GENERAL	564	
		TARAWA	565	
		UNDEFINED	566 THROUGH 575	
		LHD GENERAL	576	
		WASP	577	
		UNDEFINED	578 THROUGH 587	

FIELD CODING FOR J12.6C4

(SHEET 118)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		LPA GENERAL	588	
		UNDEFINED	589 THROUGH 598	
		LPD GENERAL	599	
		AUSTIN	600	
		FEARLESS	601	
		IVAN ROGOV	602	
		UNDEFINED	603	
		RALEIGH	604	
		SAN GIORGIO	605	
		UNDEFINED	606 THROUGH 615	
		LPH GENERAL	616	
		IWO JIMA	617	
		UNDEFINED	618 THROUGH 627	
		LSD GENERAL	628	
		ANCHORAGE	629	
		ASHLAND	630	
		CABILDO	631	
		OURAGAN	632	
		FOUDRE	633	
		THOMASTON	634	
		WHIDBEY ISLAND	635	
		UNDEFINED	636 THROUGH 646	
		LSL GENERAL	647	
		SIR GERAINT	648	
		UNDEFINED	649 THROUGH 657	
		LSM GENERAL	658	
		ASHDOD	659	
		BATRAL	660	
		CAKABEY	661	
		EDIC I	662	
		EDIC II	663	
		LSM-1	664	
		MP-4	665	
		POLNOCHNY	666	
		POLOCHNY A	667	
		POLOCHNY B	668	
		POLOCHNY C	669	
		POLOCHNY D	670	
		YUDAO	671	
		YULIMG	672	
		BOUGAINVILLE	673	
		UNDEFINED	674 THROUGH 687	

FIELD CODING FOR J12.6C4

(SHEET 119)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		LST GENERAL	688	
		ALLIGATOR	689	
		ATSUMI	690	
		UNDEFINED	691	
		BROOKE MARINE 93M	692	
		CAKABEY NL-122	693	
		CNIM PS 700	694	
		DE SOTO COUNTY	695	
		DISUSED	696	
		HENGAM	697	
		LST 1-510	698	
		LST 511-1152	699	
		MIURA	700	
		NEWPORT	701	
		ROPUCHA	702	
		SARUCABEY	703	
		CNGF	704	
		OCEAN	705	
		ALBION	706	
		TERREBONNE PARISH	707	
		TOBRUK	708	
		UNDEFINED	709	
		YUKAN	710	
		UNDEFINED	711 THROUGH 730	
		LSV GENERAL	731	
		UNDEFINED	732 THROUGH 741	
		LC GENERAL	742	
		UNDEFINED	743 THROUGH 751	
		LCM GENERAL	752	
		CTM 1	753	
		HUNGNAM	754	
		LCM 1057/1058	755	
		LCM 6	756	
		LCM 8	757	
		T-4	758	
		TSAPLYA	759	
		LCM (TYPE 521)	760	
		UNDEFINED	761 THROUGH 772	
		LCP GENERAL	773	
		DISUSED	774	
		LCM 1031	775	
		LCM 1035/1036	776	

5.2-908

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 120)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		LCM 1055/1056	777	
		NAMPO	778	
		UNDEFINED	779 THROUGH 788	
		LCPL GENERAL	789	
		UNDEFINED	790 THROUGH 799	
		LWC GENERAL	800	
		UNDEFINED	801 THROUGH 810	
		LCU GENERAL	811	
		BALIKPAPAN	812	
		BOMBARDA	813	
		BRAILA	814	
		LCU (TYPE 520)	815	
		DISUSED	816	
		DISUSED	817	
		DISUSED	818	
		DSM-501	819	
		HANCHON	820	
		HANTAE	821	
		KISHON	822	
		KVALSUND	823	
		LCT MK 5	824	
		LCT MK 6	825	
		LCU 501	826	
		MFP D-3	827	
		MZ	828	
		REINOYSUND	829	
		SMB-1	830	
		TU 57-M	831	
		US LCU 1466	832	
		VYDRA	833	
		YURA	834	
		UNDEFINED	835 THROUGH 866	
		LCVP GENERAL	867	
		UNDEFINED	868 THROUGH 877	
		LCAC GENERAL	878	
		AIST	879	
		GUS	880	
		LEBED	881	
		UTENOK	882	
		WELLINGTON BH-7 MK 4	883	
		WELLINGTON BH-7 MK 5	884	
		WINCHESTER (SR.N6)	885	

FIELD CODING FOR J12.6C4

(SHEET 121)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		UNDEFINED	886 THROUGH 896	
		MM GENERAL	897	
		ALESHA	898	
		ALVSBORG	899	
		BORGEN	900	
		CARLSKRONA	901	
		COSAR	902	
		FALSTER	903	
		FURUSUND (MUL-20)	904	
		LANGELAND	905	
		LINDORMEN	906	
		LSM-1 (MODIFIED)	907	
		MUL-11	908	
		MUL-12	909	
		DISUSED	910	
		SMITH	911	
		US YMP	912	
		VIDAR	913	
		UNDEFINED	914 THROUGH 935	
		MCS GENERAL	936	
		UNDEFINED	937 THROUGH 946	
		MCJ GENERAL	947	
		UNDEFINED	948 THROUGH 957	
		MCD GENERAL	958	
		KINGSTON	959	
		MUEHLHAUSEN MCD (TYPE 742A)	960	
		UNDEFINED	961 THROUGH 968	
		MCM GENERAL	969	
		UNDEFINED	970 THROUGH 979	
		MH GENERAL	980	
		UNDEFINED	981 THROUGH 990	
		MHO GENERAL	991	
		UNDEFINED	992 THROUGH 1001	
		MHC GENERAL	1002	
		ADJUTANT (MODIFIED)	1003	
		AGGRESSIVE	1004	
		CIRCE	1005	
		WEIDEN MHC (TYPE 332)	1006	
		KOBLENZ MHC (TYPE 331B)	1007	
		UNDEFINED	1006 THROUGH 1007	
		HAM	1008	

FIELD CODING FOR J12.6C4

(SHEET 122)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2 -----	(CONTINUED)	
		HUNT	1009	
		LANDSORT	1010	
		LERICI	1011	
		MSC 50	1012	
		MSO 218	1013	
		MSO 503	1014	
		SAUDA	1015	
		SIRIUS	1016	
		DISUSED	1017	
		TRIPARTITE	1018	
		VANYA I	1019	
		SANDOWN (SRMH)	1020	
		UNDEFINED	1021 THROUGH 1029	
		MHSC GENERAL	1030	
		MARS	1031	
		UNDEFINED	1032 THROUGH 1043	
		MHI GENERAL	1044	
		BAY	1045	
		UNDEFINED	1046 THROUGH 1054	
		MHA GENERAL	1055	
		UNDEFINED	1056 THROUGH 1065	
		ML GENERAL	1066	
		UNDEFINED	1067 THROUGH 1076	
		MLC GENERAL	1077	
		CURLEW	1078	
		UNDEFINED	1079 THROUGH 1088	
		MLI GENERAL	1089	
		UNDEFINED	1090 THROUGH 1099	
		MLO GENERAL	1100	
		UNDEFINED	1101 THROUGH 1110	
		MLR GENERAL	1111	
		UNDEFINED	1112 THROUGH 1121	
		MLA GENERAL	1122	
		UNDEFINED	1123 THROUGH 1132	
		MLS GENERAL	1133	
		UNDEFINED	1134 THROUGH 1143	
		MS GENERAL	1144	
		UNDEFINED	1145 THROUGH 1154	
		MSF GENERAL	1155	
		EX-ERIMO	1156	
		K-8	1157	
		KROGULEC	1158	

FIELD CODING FOR J12.6C4

(SHEET 123)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		M-40	1159	
		MSO-421	1160	
		NATYA I	1161	
		NATYA II	1162	
		RIVER	1163	
		T-43	1164	
		YURKA	1165	
		UNDEFINED	1166 THROUGH 1180	
		MSO GENERAL	1181	
		ACME	1182	
		AGGRESSIVE	1183	
		UNDEFINED	1184 THROUGH 1193	
		MSC GENERAL	1194	
		136 FT	1195	
		ADJUTANT	1196	
		ARKOE	1197	
		BAY	1198	
		DOKKUM	1199	
		HATSUSHIMA	1200	
		HAYASE	1201	
		DISUSED	1202	
		KOUZJ	1203	
		LENIWKA	1204	
		HAMELN MSC (TYPE 343)	1205	
		MSC 268	1206	
		MSC 292	1207	
		MSC 294	1208	
		NOTEC	1209	
		SASHA	1210	
		SAUDA	1211	
		DISUSED	1212	
		DISUSED	1213	
		SONYA	1214	
		T-301	1215	
		T-43	1216	
		TAKAMI	1217	
		DISUSED	1218	
		VANYA	1219	
		VANYA I	1220	
		VANYA II	1221	
		WUSONG	1222	
		ZHENYA	1223	

FIELD CODING FOR J12.6C4

(SHEET 124)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		UNDEFINED	1224 THROUGH 1263	
		MSI GENERAL	1264	
		DISUSED	1265	
		AUX MINESWEEPER NO 1	1266	
		CAPE	1267	
		FRAUENLOB (TYPE 394)	1268	
		HAM	1269	
		HERSTAL	1270	
		KIISKI	1271	
		KUHA	1272	
		M-111	1273	
		M-15	1274	
		M-31	1275	
		M-43/47	1276	
		PIPA-A	1277	
		WOCHANG	1278	
		YEVGENYA	1279	
		YUKTO	1280	
		UNDEFINED	1281 THROUGH 1302	
		MSR GENERAL	1303	
		UNDEFINED	1304 THROUGH 1313	
		MSB GENERAL	1314	
		K-8	1315	
		N-300	1316	
		NESTIN	1317	
		NØ. 7	1318	
		OLYA	1319	
		PO-2	1320	
		TR-40	1321	
		VD-141	1322	
		VULCAIN	1323	
		STYX	1324	
		PLUTON	1325	
		ACHERON	1326	
		UNDEFINED	1327 THROUGH 1334	
		MSA GENERAL	1335	
		UNDEFINED	1336 THROUGH 1345	
		MSD GENERAL	1346	
		HFG-1 (TROIKA)	1347	
		ILYUSHA	1348	
		UNDEFINED	1349 THROUGH 1358	
		MCSD GENERAL	1359	

5.2-913

MIL-STD-6016B

FIELD CODING FOR J12.6C4 (SHEET 125)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2 -----	(CONTINUED)	
		UNDEFINED	1360 THROUGH 1369	
		MSS GENERAL	1370	
		ANDRYUSHA	1371	
		BALTIKA	1372	
		POLNOCNY	1373	
		UNDEFINED	1374 THROUGH 1383	
		MSH GENERAL	1384	
		UNDEFINED	1385 THROUGH 1394	
		MSO GENERAL	1395	
		BERLAIMONT (MODIFIED)	1396	
		UNDEFINED	1397 THROUGH 1405	
		MSHC GENERAL	1406	
		HUNT	1407	
		TRIPARTITE	1408	
		WILTON	1409	
		UNDEFINED	1410 THROUGH 1419	
		PP GENERAL	1420	
		AB 25	1421	
		UNDEFINED	1422	
		BALDER	1423	
		CASTLE	1424	
		ISLAND	1425	
		KRONSHADT	1426	
		PC-1638	1427	
		UNDEFINED	1428 THROUGH 1438	
		PG GENERAL	1439	
		BESKYTTEVREN	1440	
		BIHORO	1441	
		ERIMO	1442	
		DISUSED	1443	
		HVIDBJOERNEN	1444	
		IZU	1445	
		KOJIMA	1446	
		UNDEFINED	1447	
		NOJIMA	1448	
		PAUK	1449	
		PEACOCK	1450	
		POTI	1451	
		SAVAGE	1452	
		SHIRETOKO	1453	
		SOYA	1454	
		TACOMA	1455	

FIELD CODING FOR J12.6C4

(SHEET 126)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		LEOPARD (TYPE 148)	1456	
		BAMBU	1457	
		CASSIOPEA	1458	
		UNDEFINED	1459 THROUGH 1480	
		PGS GENERAL	1481	
		UNDEFINED	1482 THROUGH 1491	
		PGB GENERAL	1492	
		UNDEFINED	1493 THROUGH 1502	
		PGF GENERAL	1503	
		ALBATROS (TYPE 143)	1504	
		ASHEVILLE	1505	
		BARNEGAT	1506	
		CHONGJU	1507	
		GEPARD (TYPE 143A)	1508	
		HOUKU	1509	
		IVANSUSANIN	1510	
		KAMAN	1511	
		KARTAL	1512	
		KOMAR	1513	
		LA COMBATTANTE II	1514	
		LA COMBATTANTE III	1515	
		LURSSSEN FPB 57 TYPE	1516	
		OKHTENSKIY	1517	
		OSA I	1518	
		OSA II	1519	
		P-4	1520	
		PURGA	1521	
		SAAR 2	1522	
		SAAR 3	1523	
		SAAR 4	1524	
		SAAR 5	1525	
		SARIWON	1526	
		SNOEGG	1527	
		SOHUNG	1528	
		SOJU	1529	
		SORUM	1530	
		STORM	1531	
		T	1532	
		T-43	1533	
		T-58	1534	
		VOSPER 100-FT	1535	
		VOSPER BRAVE	1536	

FIELD CODING FOR J12.6C4 (SHEET 127)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		WILLEMOES	1537	
		UNDEFINED	1538	THROUGH 1583
		PC GENERAL	1584	
		ADMIRABLE	1585	
		AGDLEK	1586	
		AKIZUKI	1587	
		ATTACK	1588	
		BAY	1589	
		DISUSED	1590	
		BROOKE MARINE 108-FT	1591	
		CACINE	1592	
		CHONGJU	1593	
		DAPHNE	1594	
		GDANSK	1595	
		HAIKOU	1596	
		HAINAN	1597	
		HANOE	1598	
		K-48	1599	
		KRALJEVICA	1600	
		KRONSHADT	1601	
		LAKE	1602	
		MAGAEN	1603	
		MATSUNAMI	1604	
		MIZUTORI	1605	
		MURAKUMO	1606	
		OBLUZE	1607	
		PGM 71	1608	
		SDB MK II	1609	
		SDB MK III	1610	
		SEAFORTH	1611	
		SHANGHAI	1612	
		SHANGHAI II	1613	
		SHANGHAI II (MODIFIED)	1614	
		SHIKINAMI	1615	
		SO-1	1616	
		SOMAN	1617	
		STENKA	1618	
		T-58	1619	
		TAECHONG	1620	
		UK FORD	1621	
		UMIGIRI	1622	
		US 110-FT	1623	

FIELD CODING FOR J12.6C4

(SHEET 128)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		US 173-FT	1624	
		UNDEFINED	1625	
		ARCHER	1626	
		ATTACKER	1627	
		23M PC (MANLY)	1628	
		UNDEFINED	1629 THROUGH 1681	
		PCF GENERAL	1682	
		BABOCHKA	1683	
		MURAVEY	1684	
		POTI	1685	
		SO-1 (MODIFIED)	1686	
		UNDEFINED	1687 THROUGH 1696	
		PCE GENERAL	1697	
		UNDEFINED	1698 THROUGH 1707	
		PB GENERAL	1708	
		AKAGI	1709	
		AKIZUKI	1710	
		ALBATROZ	1711	
		ATTACK P-90	1712	
		BARSO	1713	
		BAY	1714	
		BIZAN	1715	
		BROOKE MARINE 37.5M	1716	
		CHONGJIN	1717	
		DABUR	1718	
		DALARO	1719	
		DE L'ESTEREL	1720	
		DILOS	1721	
		DOM ALEIXO	1722	
		DISUSED	1723	
		FREMANTLE	1724	
		GOULANDRIS	1725	
		GUANABACOA	1726	
		HAMAGIRI	1727	
		HAMELIN 37M	1728	
		HIDAKA	1729	
		HUANGPU	1730	
		INTERCEPTOR MK II	1731	
		KIMJIN 67-FT	1732	
		MATSUNAMI	1733	
		MURAKUMO	1734	
		OIRASE	1735	

FIELD CODING FOR J12.6C4

(SHEET 129)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2 -----	(CONTINUED)	
		P 400	1736	
		P-6	1737	
		PANAGOPOULOS	1738	
		PATRA	1739	
		PBR MK II	1740	
		PBR MK III	1741	
		PGM 71	1742	
		PO-2	1743	
		POLISH K-8	1744	
		POLUCHAT I	1745	
		SHANTOU	1746	
		SHIKINAMI	1747	
		SINHUNG 72-FT	1748	
		SKANOER	1749	
		SOYA/TSUGARU	1750	
		SPEAR	1751	
		STEWART 85-FT	1752	
		SWATOW	1753	
		SWIFT	1754	
		TAISHAN	1755	
		TESHIO	1756	
		TRACKER II	1757	
		US 110-FT	1758	
		US ARMY 2001 65-FT	1759	
		USCG 83-FT	1760	
		VEDETTE 28 92-FT	1761	
		VIKRAM	1762	
		VOSPER 70-FT	1763	
		YAMAYURI	1764	
		ZHUK	1765	
		SNOEGG	1766	
		MARS	1767	
		TRIDENT	1768	
		UNDEFINED	1769 THROUGH 1842	
		PBF GENERAL	1843	
		CHAO (CHODO)	1844	
		DE L'ESTEREL	1845	
		GIRNE	1846	
		HAUK	1847	
		HUGIN	1848	
		SLEPEN	1849	
		UNDEFINED	1850	

5.2-918

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 130)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2 -----	(CONTINUED)	
		SPICA II	1851	
		MARS	1852	
		UNDEFINED	1853	THROUGH 1863
		PBS GENERAL	1864	
		UNDEFINED	1865	THROUGH 1874
		PBR GENERAL	1875	
		LEIE	1876	
		PIYAVKA	1877	
		SHMEL	1878	
		VOSH	1879	
		YATUSH	1880	
		YAZ	1881	
		UNDEFINED	1882	THROUGH 1891
		PT GENERAL	1892	
		AN JU	1893	
		EPITROP	1894	
		HIGGINS 78-FT	1895	
		HUCHUAN PTH-	1896	
		HUZHOU	1897	
		IWON	1898	
		DISUSED	1899	
		KU SONG	1900	
		NO. 11	1901	
		P-4	1902	
		P-6	1903	
		PILICA	1904	
		SHERSHEN	1905	
		SIN HUNG	1906	
		SIN NAM	1907	
		SINPO	1908	
		SOLOVEN	1909	
		SPICA	1910	
		TJELD	1911	
		WISLA	1912	
		DISUSED	1913	
		SHANGDONG	1914	
		TURYA	1915	
		UNDEFINED	1916	THROUGH 2047
		PHM GENERAL	2048	
		MATKA	2049	
		PEGASUS	2050	
		SARANCHA	2051	

FIELD CODING FOR J12.6C4

(SHEET 131)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2 -----	(CONTINUED)	
		SHIMRIT	2052	
		SPARVIERO	2053	
		UNDEFINED	2054 THROUGH 2063	
		BM GENERAL	2064	
		UNDEFINED	2065 THROUGH 2074	
		BMR GENERAL	2075	
		UNDEFINED	2076 THROUGH 2085	
		SWCL GENERAL	2086	
		UNDEFINED	2087 THROUGH 2096	
		AA GENERAL	2097	
		UNDEFINED	2098 THROUGH 2107	
		AG GENERAL	2108	
		ADOLF	2109	
		AKIZUKI	2110	
		ANGARA	2111	
		ARGO	2112	
		AYANAMI	2113	
		DISUSED	2114 THROUGH 2115	
		CHAMOIS	2116	
		CHIHAYA	2117	
		DALDYN	2118	
		DISUSED	2119	
		DINGHAI	2120	
		ENDURANCE	2121	
		EXPLORER	2122	
		DISUSED	2123	
		FRIPONNE	2124	
		GALEB	2125	
		UNDEFINED	2126	
		HAM	2127	
		DISUSED	2128	
		HAYABUSA	2129	
		DISUSED	2130	
		ISLES	2131	
		KEYLA	2132	
		KURIHAMA	2133	
		L ' ARCHEONAUTE	2134	
		L ' ATHOS	2135	
		UNDEFINED	2136	
		LENTRA	2137	
		LIANYUN	2138	
		LSIL	2139	

FIELD CODING FOR J12.6C4

(SHEET 132)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		MIZUTORI	2140	
		MP-2	2141	
		MP-8	2142	
		MURASAME	2143	
		NEFTEGAZ	2144	
		NØ. 81	2145	
		NORGE	2146	
		OHRE	2147	
		ONEGA	2148	
		DISUSED	2149	
		POSEIDON	2150	
		PS-10	2151	
		RARI	2152	
		RHIN	2153	
		SABAC	2154	
		SHAHSAVAR	2155	
		ST. LYKODIS	2156	
		STALWART	2157	
		T-43	2158	
		TAPATAI	2159	
		TAPPE	2160	
		THULE	2161	
		TOMBA	2162	
		TSUGARU	2163	
		UMITAKA	2164	
		US 184 FT. PCE	2165	
		US 72 FT. HMDL	2166	
		VANGUARD	2167	
		VIS	2168	
		VYTEGRALES	2169	
		WHISKEY	2170	
		WILHELM PULLWER (TYPE 741)	2171	
		PELIKAAN	2172	
		RANCE	2173	
		MERCURE	2174	
		STERNE	2175	
		ALBATROS	2176	
		PHENIX	2177	
		UNDEFINED	2178 THROUGH 2256	
		ARV GENERAL	2257	
		ARGUS	2258	

5.2-921

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 133)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		ENGADINE	2259	
		RELIANT	2260	
		UNDEFINED	2261 THROUGH 2270	
		AVT GENERAL	2271	
		LEXINGTON	2272	
		UNDEFINED	2273 THROUGH 2282	
		AE GENERAL	2283	
		EVROS	2284	
		DISUSED	2285	
		KILAUEA	2286	
		NITRO	2287	
		REGENT	2288	
		SURIBACHI	2289	
		WESTERWALD (TYPE 760)	2290	
		UNDEFINED	2291 THROUGH 2301	
		AEL GENERAL	2302	
		UNDEFINED	2303 THROUGH 2312	
		AET GENERAL	2313	
		UNDEFINED	2314 THROUGH 2323	
		AETL GENERAL	2324	
		UNDEFINED	2325 THROUGH 2334	
		AGF GENERAL	2335	
		ABDIEL	2336	
		CORONADO	2337	
		GODETIA	2338	
		LA SALLE	2339	
		DISUSED	2340	
		ZINNIA	2341	
		ELBE (TYPE 404)	2342	
		UNDEFINED	2343 THROUGH 2351	
		ACM GENERAL	2352	
		UNDEFINED	2353 THROUGH 2362	
		APB GENERAL	2363	
		MICHELANGELO	2364	
		UNDEFINED	2365 THROUGH 2374	
		ABU GENERAL	2375	
		CARDENAS	2376	
		FINIK I	2377	
		KARPF II	2378	
		SKB 64	2379	
		YANTAI	2380	
		YANNAN	2381	

5.2-922

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		YANGUAN	2382	
		TIANEE	2383	
		LA PRUDENTE	2384	
		UNDEFINED	2385 THROUGH 2395	
		ABUD GENERAL	2396	
		UNDEFINED	2397 THROUGH 2406	
		ANL GENERAL	2407	
		UNDEFINED	2408 THROUGH 2417	
		ARC GENERAL	2418	
		EMBA I	2419	
		EMBA II	2420	
		KALAR	2421	
		KLASMA	2422	
		MP-2	2423	
		NEPTUNE	2424	
		TELNOVSK (MODIFIED)	2425	
		YOUDIAN	2426	
		ZEUS	2427	
		UNDEFINED	2428 THROUGH 2440	
		AK GENERAL	2441	
		2ND LT JOHN P BOBO	2442	
		ALCHIBA	2443	
		AMGUEMA	2444	
		ANDIZHAN	2445	
		ANDONG	2446	
		ANDROMEDA (CONVERTED)	2447	
		DISUSED	2448	
		BARRICADE	2449	
		BITTERBUSH	2450	
		C3-S-33A TYPE	2451	
		(CONVERTED)		
		C4-S-66A TYPE	2452	
		C4-S-69B TYPE	2453	
		C4-S-A3 TYPE	2454	
		C5-S-75A TYPE	2455	
		CHULYM	2456	
		CPL LOUIS J HAUGE JR	2457	
		DINGHAI	2458	
		DONBA SS	2459	
		FS DESIGN 330	2460	
		GALATI	2461	
		HONGQI	2462	

FIELD CODING FOR J12.6C4

(SHEET 135)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2 -----	(CONTINUED)	
		ISLES	2463	
		KANARYA	2464	
		KOLOMNA	2465	
		LENINGRADSKY KOMSOMOLETS	2466	
		LSIL	2467	
		NEON ANTONOV	2468	
		NORWALK	2469	
		PT-61	2470	
		SGT MATEJ KOCAK	2471	
		THROSK	2472	
		TREE	2473	
		YANHANG	2474	
		YUNYY PARTIZAN	2475	
		UNDEFINED	2476 THROUGH 2521	
		AKL GENERAL	2522	
		ELTANIN	2523	
		KEYLA	2524	
		UNDEFINED	2525	
		LENTA	2526	
		UNDEFINED	2527	
		MP 4	2528	
		MP 6	2529	
		MUNA	2530	
		SEKSTAN	2531	
		TELNOVSK	2532	
		WISTING	2533	
		GORGONA	2534	
		UNDEFINED	2535 THROUGH 2549	
		AKR GENERAL	2550	
		ALGOL (SL 7)	2551	
		CALLAGHAN	2552	
		COMET	2553	
		METEOR	2554	
		DISUSED	2555	
		MAINE (CONVERTED)	2556	
		UNDEFINED	2557 THROUGH 2566	
		AFS GENERAL	2567	
		FORT	2568	
		UNDEFINED	2569	
		MARS	2570	
		RESOURCE	2571	
		UNDEFINED	2572 THROUGH 2580	

5.2-924

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 136)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		AOE GENERAL	2581	
		SACRAMENTO	2582	
		SAGAMI	2583	
		UNDEFINED	2584 THROUGH 2593	
		AD GENERAL	2594	
		YELLOWSTONE	2595	
		SAMUEL GOMPERS	2596	
		DIXIE	2597	
		STALWART	2598	
		UNDEFINED	2599 THROUGH 2608	
		AWW GENERAL	2609	
		UNDEFINED	2610 THROUGH 2619	
		AH GENERAL	2620	
		HAVEN	2621	
		OB	2622	
		DISUSED	2623	
		UNDEFINED	2624 THROUGH 2632	
		AGB GENERAL	2633	
		DOBRYNYA NIKITICH	2634	
		HANSE	2635	
		IVANSUSANIN	2636	
		SHIRASE	2637	
		YANHA	2638	
		UNDEFINED	2639 THROUGH 2648	
		AGBL GENERAL	2649	
		EISVOGEL (TYPE 721)	2650	
		DISUSED	2651	
		UNDEFINED	2652 THROUGH 2661	
		AGI GENERAL	2662	
		ALPINIST	2663	
		ARMINZA	2664	
		UNDEFINED	2665	
		BALZAM	2666	
		BOLOGOE	2667	
		DISUSED	2668	
		HAM	2669	
		DISUSED	2670	
		DISUSED	2671	
		LENTRA	2672	
		MAYAK	2673	
		MIRNYY	2674	
		MOMA	2675	

5.2-925

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 137)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		NIKOLAY ZUBOV	2676	
		OKEAN	2677	
		DISUSED	2678	
		PAMIR	2679	
		PRIMORYE	2680	
		ALSTER (TYPE 423)	2681	
		UNDEFINED	2682	THROUGH 2705
		ALS GENERAL	2706	
		UNDEFINED	2707	THROUGH 2716
		AEM GENERAL	2717	
		AMGA	2718	
		ANDIZHAN (MODIFIED)	2719	
		LAMA	2720	
		MALINA	2721	
		MELITOPOL	2722	
		MP 6	2723	
		UNDEFINED	2724	THROUGH 2733
		AGM GENERAL	2734	
		AGM-24	2735	
		GEN HOYT S VANDENBERG	2736	
		OBSERVATION ISLAND	2737	
		RANGE SENTINEL	2738	
		(HASKELL TYPE)		
		REDSTONE	2739	
		UNDEFINED	2740	THROUGH 2749
		AGOR GENERAL	2750	
		ABKHAZIYA	2751	
		AKADEMIK KRYLOV	2752	
		ARAD	2753	
		BALIKPAPAN	2754	
		BELGICA	2755	
		DISUSED	2756	
		COOK	2757	
		D'ENTRECASTEAUX	2758	
		DOBRYNYA NIKITICH	2759	
		DONG MING	2760	
		ELTANIN	2761	
		ENDEAVOR	2762	
		FRANCESCO NULLO	2763	
		DISUSED	2764	
		GRIGORE ANTIPA	2765	
		GYRE	2766	

5.2-926

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2 -----	(CONTINUED)	
		HAYES	2767	
		HECLA	2768	
		MELVILLE	2769	
		MSC 60	2770	
		NAUTILUS	2771	
		NEVELSKOY	2772	
		NIKOLAY ZUBOV	2773	
		PITHEAS	2774	
		POLYUS	2775	
		QUEST	2776	
		ROBERT D CONRAD	2777	
		T-43	2778	
		TRITON	2779	
		TUI	2780	
		TYDEMAN	2781	
		XIANG YANG HONG	2782	
		YANLUN	2783	
		YUG	2784	
		ZENOBE GRAMME	2785	
		MAYAK	2786	
		UNDEFINED	2787 THROUGH 2823	
		AGOB GENERAL	2824	
		POLARSTERN	2825	
		UNDEFINED	2826 THROUGH 2835	
		AGOS GENERAL	2836	
		UNDEFINED	2837 THROUGH 2845	
		AO GENERAL	2846	
		UNDEFINED	2847	
		AKAR	2848	
		ALBAY BURBAK	2849	
		ALTAY	2850	
		UNDEFINED	2851	
		BASKUNCHAK	2852	
		BAYLEAF	2853	
		BINBASI GURGAN	2854	
		DISUSED	2855	
		CIMARRON	2856	
		CIMARRON (JUMBOISED)	2857	
		DORA	2858	
		HAMANA	2859	
		DISUSED	2860	
		DISUSED	2861	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		HENRY J KAISER	2862	
		IRTYSH	2863	
		KALININGRADNEFT	2864	
		KHOBI	2865	
		KONDA	2866	
		METTAWEE	2867	
		MISPELLION (JUMBOISED)	2868	
		MOSKIT	2869	
		NEOSHO	2870	
		NERCHA	2871	
		NORWEGIAN BOW	2872	
		OLEKMA	2873	
		PATAPSCO	2874	
		PEVEK	2875	
		UNDEFINED	2876	
		SOFIYA	2877	
		SPESSART (TYPE 704A)	2878	
		TASKIZAK	2879	
		USEDOM	2880	
		WALCHENSEE (TYPE 703)	2881	
		WAVE	2882	
		DISUSED	2883	
		YUZHASI TOLUNAY	2884	
		BRAMBLELEAF	2885	
		UNDEFINED	2886	THROUGH 2936
		AOT GENERAL	2937	
		AMERICAN EXPLORER	2938	
		AOTL	2939	
		EBANOL	2940	
		FULIN	2941	
		FUZHOU	2942	
		GUANZGHOU	2943	
		LEIZHOU	2944	
		MAUMEE	2945	
		METTAWEE	2946	
		MISSION	2947	
		POTOMOC	2948	
		SEALIFT	2949	
		SUAMICO	2950	
		T 5 TYPE	2951	
		TM2	2952	
		PORT VENDRES	2953	

FIELD CODING FOR J12.6C4

(SHEET 140)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		UNDEFINED	2954 THROUGH 2973	
		AOTL GENERAL	2974	
		DISUSED	2975	
		KHOB	2976	
		UNDEFINED	2977 THROUGH 2986	
		AOR GENERAL	2987	
		BANDAR ABBAS	2988	
		BEREZINA	2989	
		BORIS CHILIKIN	2990	
		CAPITAN OLA PANTOJA	2991	
		DEEPAK	2992	
		DUBNA	2993	
		DURANCE	2994	
		FUQING	2995	
		KAZBEK	2996	
		KHARG	2997	
		MEERSBURG (TYPE 701C)	2998	
		MESAR	2999	
		OLWEN	3000	
		POOLSTER	3001	
		POLYARNIK	3002	
		PROTECTEUR	3003	
		PROVIDER	3004	
		ROVER	3005	
		SAO GABRIEL	3006	
		STROMBOLI	3007	
		TIDE (IMPROVED)	3008	
		UDA	3009	
		WICHITA	3010	
		FORT VICTORIA	3011	
		BERLIN (TYPE 702C)	3012	
		UNDEFINED	3013 THROUGH 3042	
		AORL GENERAL	3043	
		LEIZHOU	3044	
		UNDEFINED	3045 THROUGH 3054	
		AOL GENERAL	3055	
		PUNARUU	3056	
		UNDEFINED	3057 THROUGH 3065	
		AGP GENERAL	3066	
		GRAHAM COUNTY	3067	
		NORGE	3068	
		DISUSED	3069	

FIELD CODING FOR J12.6C4

(SHEET 141)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2 -----	(CONTINUED)	
		MERCUUR	3070	
		UNDEFINED	3071 THROUGH 3079	
		AP GENERAL	3080	
		MIKHAIL KALININ	3081	
		PANDORA	3082	
		QIONGSHA	3083	
		UNDEFINED	3084 THROUGH 3093	
		AGR GENERAL	3094	
		UNDEFINED	3095 THROUGH 3104	
		AOSR GENERAL	3105	
		UNDEFINED	3106 THROUGH 3115	
		AR GENERAL	3116	
		ACHELOUS	3117	
		AJAX	3118	
		AMPHION	3119	
		AMUR	3120	
		ARL I	3121	
		DALIANG	3122	
		DILIGENCE	3123	
		DIXIE	3124	
		JULES VERNE	3125	
		OSKOL	3126	
		RHIN	3127	
		STALWART	3128	
		UNDEFINED	3129 THROUGH 3145	
		ARL GENERAL	3146	
		ARCHELOUS	3147	
		UNDEFINED	3148 THROUGH 3157	
		AGE GENERAL	3158	
		BELGICA	3159	
		BERRY	3160	
		UNDEFINED	3161	
		COMMANDANT RIVIERE	3162	
		DESNA	3163	
		DOBRYNYA NIKITICH	3164	
		EF 3	3165	
		HENRI POINCARE	3166	
		ILE D'OLERON	3167	
		IVANSUSANIN	3168	
		KOLOMNA	3169	
		LENTRA	3170	
		MARSHAL NEDELIN	3171	

5.2-930

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 142)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2 -----	(CONTINUED)	
		MOMA	3172	
		MP-8	3173	
		MUNA	3174	
		NARVIK	3175	
		OS-3	3176	
		POINT LOMA	3177	
		POTOK	3178	
		QUARTO	3179	
		SASHA	3180	
		SIBIR	3181	
		SO-1	3182	
		T-43	3183	
		TRITON	3184	
		DISUSED	3185	
		YAL 01	3186	
		YANXI	3187	
		ROSSETTI	3188	
		DENTI	3189	
		MONGE	3190	
		UNDEFINED	3191 THROUGH 3227	
		ARS GENERAL	3228	
		BOLSTER	3229	
		DISUSED	3230	
		INGUL	3231	
		KATUN I	3232	
		KATUN II	3233	
		KOWAN	3234	
		LSIL 351	3235	
		MIKHAIL RUDNITSKY	3236	
		OREL	3237	
		PAMIR	3238	
		PIAST	3239	
		PROTEO	3240	
		PS-11	3241	
		SAFEGUARD	3242	
		SILVA	3243	
		SPASILAC	3244	
		DISUSED	3245	
		US 149 FT	3246	
		YANDING	3247	
		UNDEFINED	3248 THROUGH 3273	
		ARSD GENERAL	3274	

5.2-931

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 143)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		UNDEFINED	3275 THROUGH 3284	
		ASVR GENERAL	3285	
		UNDEFINED	3286 THROUGH 3295	
		AOS GENERAL	3296	
		ALATNA	3297	
		LUZA	3298	
		URAL	3299	
		VALA	3300	
		TONTI	3301	
		UNDEFINED	3302 THROUGH 3311	
		AF GENERAL	3312	
		CROITOR	3313	
		DANLIN	3314	
		MAYAK	3315	
		RIEGEL	3316	
		UNDEFINED	3317 THROUGH 3326	
		AKS GENERAL	3327	
		UNDEFINED	3328 THROUGH 3337	
		AKSL GENERAL	3338	
		UNDEFINED	3339 THROUGH 3348	
		AFL GENERAL	3349	
		UNDEFINED	3350 THROUGH 3359	
		ASR GENERAL	3360	
		ANTEO	3361	
		CHANTICLEER	3362	
		DAHIANG	3363	
		DALANG	3364	
		ELBRUS	3365	
		FEHMARN (TYPE 720B)	3366	
		FUSHIMI	3367	
		GALATI	3368	
		HUDONG	3369	
		KURTARAN	3370	
		NEPA	3371	
		PIGEON	3372	
		PRUT	3373	
		ROSLAVL	3374	
		SPASILAC	3375	
		VALDAY	3376	
		ZHONGHUA	3377	
		UNDEFINED	3378 THROUGH 3401	
		AS GENERAL	3402	

5.2-932

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 144)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2 -----	(CONTINUED)	
		ACHELOUS	3403	
		AEGIR	3404	
		DISUSED	3405	
		ATREK	3406	
		CHIYODA	3407	
		DADONG	3408	
		DAZHOU	3409	
		DIVER	3410	
		DNEPR	3411	
		DNEPR (MODIFIED)	3412	
		DON	3413	
		EMORY S LAND	3414	
		FULTON	3415	
		HUNLEY	3416	
		L Y SPEAR	3417	
		PROTEUS	3418	
		DISUSED	3419	
		SIMON LAKE	3420	
		UGRA	3421	
		UNDEFINED	3422 THROUGH 3447	
		ASL GENERAL	3448	
		UNDEFINED	3449 THROUGH 3458	
		AGS GENERAL	3459	
		AGS 39 CLASS	3460	
		AKASHI	3461	
		ALMEIDA CARVALHO	3462	
		AMMIRAGLIO MAGNAGHI	3463	
		ANDRIJA MOHOROVICIC	3464	
		AUK	3465	
		BIYA	3466	
		BOLOGUE	3467	
		UNDEFINED	3468	
		BUYSKES	3469	
		C4-S-A1 TYPE (CONVERTED)	3470	
		CHAUVENET	3471	
		COOK	3472	
		DING HAI	3473	
		FINIK	3474	
		FS DESIGN 330	3475	
		FUTAMI	3476	
		HAMASHIO	3477	
		HEIYO	3478	

5.2-933

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 145)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2 -----	(CONTINUED)	
		KAIBOKAN I	3479	
		KAIYO	3480	
		KAMENKA	3481	
		DISUSED	3482	
		UNDEFINED	3483	
		L'ESPERANCE	3484	
		UNDEFINED	3485	
		LENTRA	3486	
		LSIL	3487	
		MEIYO	3488	
		MELITOPOL	3489	
		MOMA	3490	
		MONOWAI	3491	
		MORESBY	3492	
		MP-8	3493	
		MSC-294 (BLUEBIRD)	3494	
		NYRYAT I	3495	
		NYRYAT II	3496	
		SAMARA	3497	
		SHOYO	3498	
		SILAS BENT	3499	
		STERNE	3500	
		SUMA	3501	
		T-43	3502	
		TAKUYO	3503	
		TELNOVSK	3504	
		TELNOVSK (MODIFIED)	3505	
		TENYO	3506	
		VICTORY (CONVERTED)	3507	
		WILKES	3508	
		YANLAI	3509	
		YANXU	3510	
		MIRTO	3511	
		MARS	3512	
		LAPEROUSE	3513	
		UNDEFINED	3514 THROUGH 3579	
		AGSA GENERAL	3580	
		UNDEFINED	3581 THROUGH 3590	
		AGSC GENERAL	3591	
		EXPLORER	3592	
		FLINDERS	3593	
		TAINO	3594	

5.2-934

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		BULLDOG	3595	
		ROEBUCK	3596	
		UNDEFINED	3597	THROUGH 3604
		AX GENERAL	3605	
		ARIS	3606	
		DISUSED	3607	
		JADRAN	3608	
		JERVIS BAY	3609	
		JOSE MARTI	3610	
		MP-8	3611	
		SMOLNY	3612	
		UGRA	3613	
		VIETNAM HEROICO	3614	
		WODNIK	3615	
		UNDEFINED	3616	THROUGH 3630
		AXL GENERAL	3631	
		UNDEFINED	3632	
		LEOPARD	3633	
		MAYAK	3634	
		UNDEFINED	3635	THROUGH 3642
		AXS GENERAL	3643	
		AMERIGO VESPUCCI	3644	
		CAROLY	3645	
		CARSARO II	3646	
		GORCH FOCK (TYPE 441A)	3647	
		MIRCEA	3648	
		PALINURO	3649	
		SAGRES	3650	
		STELLA POLARE	3651	
		UNDEFINED	3652	THROUGH 3659
		AT GENERAL	3660	
		UNDEFINED	3661	THROUGH 3665
		ATA GENERAL	3666	
		ABNAKI	3667	
		APACHE	3668	
		ARMY 254	3669	
		ATAK	3670	
		ATLANTE	3671	
		AZUMA	3672	
		BELIER	3673	
		UNDEFINED	3674	
		GAJ	3675	

FIELD CODING FOR J12.6C4

(SHEET 147)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		GNIEWKO	3676	
		GORYN	3677	
		GROMOVOY	3678	
		KUDRET	3679	
		MAITO	3680	
		MB-31	3681	
		MB-65	3682	
		MOTYL	3683	
		OKHTENSKIY	3684	
		ONCU	3685	
		POWHATAN	3686	
		ROSLAVL	3687	
		ROYSTERER	3688	
		SAINT	3689	
		SCHULTZ XAVIER	3690	
		SORUM	3691	
		TENACE	3692	
		TUZHONG	3693	
		TYPHOON	3694	
		WANGEROOGE (TYPE 722B)	3695	
		ZENIT	3696	
		MAITO	3697	
		ARMEN	3698	
		UNDEFINED	3699 THROUGH 3737	
		ATR GENERAL	3738	
		TENACE	3739	
		UNDEFINED	3740 THROUGH 3748	
		ATS GENERAL	3749	
		EDENTON	3750	
		OKHTENSKY	3751	
		LANGE00G (TYPE 754)	3752	
		ARGUS	3753	
		UNDEFINED	3754 THROUGH 3762	
		AWT GENERAL	3763	
		UNDEFINED	3764	
		BASENTO	3765	
		FUZHOU (MODIFIED)	3766	
		KANGAN	3767	
		LEIZHOU (MODIFIED)	3768	
		LSIL	3769	
		MANYCH	3770	
		MINCIO	3771	

5.2-936

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 148)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		PIAVE	3772	
		TEVERE	3773	
		ULUBAT	3774	
		VODA	3775	
		YW-83	3776	
		Z	3777	
		UNDEFINED	3778 THROUGH 3797	
		SERVICE CRAFT GENERAL	3798	
		BARGE, GENERAL	3799	
		YO GENERAL	3800	
		YOG GENERAL	3801	
		YHT GENERAL	3802	
		YRNS GENERAL	3803	
		YOS GENERAL	3804	
		YPK GENERAL	3805	
		YRR GENERAL	3806	
		YRB GENERAL	3807	
		YRST GENERAL	3808	
		YOM GENERAL	3809	
		YOSS GENERAL	3810	
		YW GENERAL	3811	
		UNDEFINED	3812 THROUGH 3827	
		YD GENERAL	3828	
		YM GENERAL	3829	
		YFD GENERAL	3830	
		YFP GENERAL	3831	
		YGT GENERAL	3832	
		YR GENERAL	3833	
		UNDEFINED	3834 THROUGH 3840	
		YFD GENERAL	3841	
		YFDB GENERAL	3842	
		YFDM GENERAL	3843	
		YFDL GENERAL	3844	
		UNDEFINED	3845 THROUGH 3850	
		YRD GENERAL	3851	
		YRDB GENERAL	3852	
		YRDM GENERAL	3853	
		YRDL GENERAL	3854	
		UNDEFINED	3855 THROUGH 3861	
		LIGHTER GENERAL	3862	
		YE GENERAL	3863	
		YF GENERAL	3864	

5.2-937

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 149)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		YFC GENERAL	3865	
		YFR GENERAL	3866	
		YC GENERAL	3867	
		YFT GENERAL	3868	
		UNDEFINED	3869	THROUGH 3878
		YT GENERAL	3879	
		YTB GENERAL	3880	
		YTM GENERAL	3881	
		YTL GENERAL	3882	
		UNDEFINED	3883	THROUGH 3892
		YAGF GENERAL	3893	
		YAG GENERAL	3894	
		YV GENERAL	3895	
		YNG GENERAL	3896	
		YP GENERAL	3897	
		YFU GENERAL	3898	
		YAM GENERAL	3899	
		YNC GENERAL	3900	
		YLC GENERAL	3901	
		YVS GENERAL	3902	
		YRG GENERAL	3903	
		YAGT GENERAL	3904	
		YPT GENERAL	3905	
		YRC GENERAL	3906	
		YDT GENERAL	3907	
		YNT GENERAL	3908	
		YH GENERAL	3909	
		YFB GENERAL	3910	
		YTR GENERAL	3911	
		YFL GENERAL	3912	
		YAC GENERAL	3913	
		YSR GENERAL	3914	
		YSG GENERAL	3915	
		YDG GENERAL	3916	
		KHABAROV	3917	
		UNDEFINED	3918	THROUGH 3936
		TM GENERAL	3937	
		TMD GENERAL	3938	
		TMB GENERAL	3939	
		TMK GENERAL	3940	
		TMF GENERAL	3941	
		TMC GENERAL	3942	

5.2-938

MIL-STD-6016B

FIELD CODING FOR J12.6C4 (SHEET 150)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		TMCS GENERAL	3943	
		TMWW GENERAL	3944	
		TMA GENERAL	3945	
		TMH GENERAL	3946	
		TMGB GENERAL	3947	
		TMI GENERAL	3948	
		TML GENERAL	3949	
		TMOT GENERAL	3950	
		TMM GENERAL	3951	
		TMP GENERAL	3952	
		TMFR GENERAL	3953	
		TMR GENERAL	3954	
		TMOR GENERAL	3955	
		TMOL GENERAL	3956	
		TME GENERAL	3957	
		TMGS GENERAL	3958	
		TMLS GENERAL	3959	
		TMS GENERAL	3960	
		TMOS GENERAL	3961	
		TMO GENERAL	3962	
		TMX GENERAL	3963	
		TMWT GENERAL	3964	
		UNDEFINED	3965	THROUGH 3989
		TMT GENERAL	3990	
		TMTR GENERAL	3991	
		TMTS GENERAL	3992	
		UNDEFINED	3993	THROUGH 4002
		TU GENERAL	4003	
		TUF GENERAL	4004	
		TUB GENERAL	4005	
		TUI GENERAL	4006	
		TUR GENERAL	4007	
		TUT GENERAL	4008	
		TUS GENERAL	4009	
		TUC GENERAL	4010	
		TUW GENERAL	4011	
		UNDEFINED	4012	THROUGH 4023
		TJ GENERAL	4024	
		TJF GENERAL	4025	
		TJC GENERAL	4026	
		TJCS GENERAL	4027	
		TJGB GENERAL	4028	

FIELD CODING FOR J12.6C4

(SHEET 151)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2 -----	(CONTINUED)	
		UNDEFINED	4029 THROUGH 4038	
		TS GENERAL	4039	
		TSG GENERAL	4040	
		TSR GENERAL	4041	
		UNDEFINED	4042 THROUGH 4052	
		MPS GENERAL	4053	
		UNDEFINED	4054 THROUGH 4069	
		SURFACE SPECIFIC TYPE 1-25	4070 THROUGH 4094	
		RESET TO NO STATEMENT	4095	

809	003	SUBSURFACE (MARITIME) AMBIGUOUS TYPE 2 -----		
-----	-----	--	--	--

IDENTIFIES THE SECOND MOST
PROBABLE TARGET SPECIFIC TYPE IF
AN ONBOARD CORRELATION PROCESS
DETERMINES THAT THE SPECIFIC TYPE
IS AMBIGUOUS. INFORMATION IN
THIS FIELD SHALL BE DERIVED ONLY
FROM ONBOARD SOURCES AS OPPOSED
TO DATA LINK SOURCES.

NO STATEMENT	0
SS GENERAL	1
ABTAO SS	2
DISUSED	3
DISUSED	4
UNDEFINED	5
DISUSED	6
GUPPY II SS	7
GUPPY IIA SS	8
GUPPY III SS	9
HAI LUNG SS	10
DISUSED	11
SAURO (TYPE 1081) SS	12
SAURO (IMPROVED) SS	13
TANG SS	14
TYPE SNA 72 SS	15
UZUSHIO SS	16
WALRUS SS	17
YUUSHIO SS	18
UNDEFINED	19
DISUSED	20
PELOSI SS	21
UNDEFINED	22 THROUGH 360

5.2-940

MIL-STD-6016B

FIELD CODING FOR J12.6C4 (SHEET 152)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
809	003	SUBSURFACE (MARITIME) AMBIGUOUS TYPE 2 -----	(CONTINUED)	
		SSB GENERAL	361	
		GOLF SSB	362	
		GOLF II SSB	363	
		GOLF III SSB	364	
		GOLF V SSB	365	
		UNDEFINED	366 THROUGH 440	
		SSBN GENERAL	441	
		BENJAMIN FRANKLIN SSBN	442	
		DELTA I SSBN	443	
		DELTA II SSBN	444	
		DELTA III SSBN	445	
		DELTA IV SSBN	446	
		HOTEL III SSBN	447	
		DISUSED	448	
		L'INFLEXIBLE SSBN	449	
		DISUSED	450	
		UNDEFINED	451	
		OHIO SSBN	452	
		RESOLUTION SSBN	453	
		TYPHOON SSBN	454	
		VANGUARD SSBN	455	
		YANKEE SSBN	456	
		YANKEE I SSBN	457	
		YANKEE II SSBN	458	
		XIA SSBN	459	
		LE TERRIBLE SSBN	460	
		UNDEFINED	461 THROUGH 720	
		SSN GENERAL	721	
		AKULA SSN	722	
		ALFA SSN	723	
		AMATHEPT SSN	724	
		CHARLIE/VICTOR SSGN/SSN	725	
		CHURCHILL SSN	726	
		ECHO/NOVEMBER SSGN/SSN	727	
		DISUSED	728	
		DISUSED	729	
		HAN SSN	730	
		HOTEL SSN	731	
		LOS ANGELES SSN	732	
		MIKE SSN	733	
		NARWHAL SSN	734	
		DISUSED	735	

FIELD CODING FOR J12.6C4

(SHEET 153)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
809	003	SUBSURFACE (MARITIME) AMBIGUOUS TYPE 2 -----	(CONTINUED)	
		RUBIS SSN	736	
		SEAWOLF SSN	737	
		SIERRA SSN	738	
		DISUSED	739	
		DISUSED	740	
		STURGEON SSN	741	
		SWIFTSURE SSN	742	
		TRAFALGAR SSN	743	
		DISUSED	744	
		VICTOR I SSN	745	
		VICTOR II SSN	746	
		VICTOR III SSN	747	
		YANKEE SSN	748	
		VIRGINIA SSN	749	
		UNDEFINED	750 THROUGH 1200	
		SSG GENERAL	1201	
		JULIETT SSG	1202	
		UNDEFINED	1203 THROUGH 1245	
		SSGN GENERAL	1246	
		CHARLIE I SSGN	1247	
		CHARLIE II SSGN	1248	
		ECHO II SSGN	1249	
		OSCAR SSGN	1250	
		PAPA SSGN	1251	
		UNDEFINED	1252 THROUGH 1345	
		SSK GENERAL	1346	
		AGOSTA SSK	1347	
		UNDEFINED	1348	
		FOXTROT SSK	1349	
		HEROJ SSK	1350	
		KILO SSK	1351	
		MING SSK	1352	
		NARVAL SSK	1353	
		DISUSED	1354 THROUGH 1355	
		ROMEO SSK	1356	
		SAVA SSK	1357	
		SUTJESKA SSK	1358	
		TANGO SSK	1359	
		UPHOLDER SSK	1360	
		WHISKEY SSK	1361	
		WHISKEY V SSK	1362	
		ZULU IV SSK	1363	

5.2-942

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
809	003	SUBSURFACE (MARITIME) AMBIGUOUS TYPE 2 -----	(CONTINUED)	
		DORIS SSK	1364	
		VICTORIA SSK	1365	
		TYPE 212 SSK	1366	
		UNDEFINED	1367 THROUGH 1665	
		SSC GENERAL	1666	
		DELFINEN SSC	1667	
		DRAKEN SSC	1668	
		NAECKEN SSC	1669	
		NARHVALEN SSC	1670	
		SJOORMEN SSC	1671	
		TOTI TYPE 1075 SSC	1672	
		TYPE 205 SSC	1673	
		TYPE 206 SSC	1674	
		KOBLEN SSC	1675	
		TYPE 209 (TYPE 1100) SSC	1676	
		TYPE 209 (TYPE 1200) SSC	1677	
		TYPE 209 (TYPE 1300) SSC	1678	
		TYPE 209 (TYPE 1400) SSC	1679	
		TYPE 209 (TYPE 1500) SSC	1680	
		ULA SSC	1681	
		TYPE 211 SSC	1682	
		VASTERGOETLAND SSC	1683	
		TYPE 206A SSC	1684	
		UNDEFINED	1685 THROUGH 1945	
		SSA GENERAL	1946	
		BRAVO SSA	1947	
		DOLPHIN (AGSS) SSA	1948	
		GOLF I SSA	1949	
		GOLF I (MODIFIED) SSA	1950	
		GOLF II SSA	1951	
		INDIA SSA	1952	
		LIMA SSA	1953	
		ROMEO SSA	1954	
		ZULU SSA	1955	
		UNDEFINED	1956 THROUGH 4069	
		SUBSURFACE SPECIFIC	4070 THROUGH 4094	
		TYPE 1-25		
		RESET TO NO STATEMENT	4095	
810	003	LAND (GROUND) AMBIGUOUS TYPE 2 -----		IDENTIFIES THE SECOND MOST PROBABLE TARGET SPECIFIC TYPE IF AN ONBOARD CORRELATION PROCESS

FIELD CODING FOR J12.6C4

(SHEET 155)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	003	LAND (GROUND) AMBIGUOUS TYPE 2 (CONTINUED)		

DETERMINES THAT THE SPECIFIC TYPE
IS AMBIGUOUS. INFORMATION IN
THIS FIELD SHALL BE DERIVED ONLY
FROM ONBOARD SOURCES AS OPPOSED TO
DATA LINK SOURCES.

NO STATEMENT	0
TOW	1
DRAGON	2
LANCE	3
SHILLEAGH	4
SERGEANT	5
AMMUNITION	6
POL	7
OBSERVATION POSTS	8
RADIO DIRECTION FINDER	9
RIVER	10
STREAM	11
LAKE	12
MARSH/SWAMP	13
MOUNTAIN	14
HILLTOP	15
RIDGE	16
DEPRESSION	17
VALLEY	18
CAVE	19
BRIDGE	20
DAM	21
BUILDING	22
VILLAGE	23
TOWN	24
ROAD INTERSECTION	25
HOSPITAL	26
HAWK	27
I-HAWK	28
PATRIOT	29
NIKE	30
REDEYE	31
STINKER	32
HELLFIRE	33
PERSHING	34
JEEP	35
CAR	36
MOTORCYCLE	37

5.2-944

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	003	LAND (GROUND) AMBIGUOUS TYPE 2 (CONTINUED)		

		BICYCLE	38	
		AMPHIBIOUS VEHICLE	39	
		RIVER CROSSING EQUIPMENT	40	
		MECHANIZED MINE SWEEPER	41	
		MOBILE RADAR	42	
		SMOKE GENERATOR	43	
		(SSSB) SHIP SHORE SHIP	44	
		BUFFER		
		(RADIL) ROCC AWACS	45	
		DIGITAL INTERFACE LINK		
		(ASIT) ADAPTABLE SURFACE	46	
		INTERFACE TERMINAL		
		(AEGIS) AEW GROUND	47	
		INTERFACE SEGMENT		
		AMBULANCE	48	
		BIOLOGICAL WEAPONS	49	
		CHEMICAL WEAPONS	50	
		NUCLEAR WEAPONS	51	
		ENGINEER VEHICLES	52	
		GENERATOR	53	
		JAMMERS	54	
		MAINTENANCE VEHICLE	55	
		MULTIPLE ROCKET LAUNCHER	56	
		RADIO	57	
		REMOTE SENSOR	58	
		SELF PROPELLED ARTILLERY	59	
		TACTICAL BRIDGE	60	
		TOWED ARTILLERY GUN	61	
		RECOILLESS RIFLE	62	
		(TACCP) TACTICAL COMMAND	63	
		POST		
		BRIGADE	64	
		CORPS	65	
		GROUP	66	
		DIVISION	67	
		REGIMENT	68	
		BATTALION	69	
		COMPANY	70	
		PLATOON	71	
		SQUADRON	72	
		AIRBASE	73	
		WING	74	
		ANTI-AIRCRAFT GUN	75	

FIELD CODING FOR J12.6C4

(SHEET 157)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	003	LAND (GROUND) AMBIGUOUS TYPE 2 (CONTINUED)		

		AIR DEFENSE ARTILLERY	76	
		GUN		
		MORTAR	77	
		FLAMETHROWER	78	
		TSC/MOCC/MARITIME	79	
		HEADQUARTERS		
		MAIN BATTLE TANK	80	
		MEDIUM TANK	81	
		LIGHT TANK	82	
		TRAIN	83	
		ARMORED PERSONNEL	84	
		VEHICLE		
		ARMORED INFANTRY	85	
		FIGHTING VEHICLE		
		LIGHT TRUCK	86	
		MEDIUM TRUCK	87	
		HEAVY TRUCK	88	
		TANK TRANSPORTER	89	
		DUMMY	90	
		TRAP	91	
		POINT TARGET	92	
		EA SITE	93	
		ARMORED PERSONNEL	94	
		CARRIER		
		ARMORED INFANTRY	95	
		FIGHTING VEHICLE		
		GCI SITE	96	
		CRC	97	
		TACC (AF)	98	
		CRP	99	
		TACC (MC)	100	
		MPC	101	
		TAOC	102	
		AADCCS (AN/TSQ-73)	103	
		DASC	104	
		FACP	105	
		FASC	106	
		AADCP	107	
		ASRT	108	
		NCC	109	
		RCC	110	
		ROCC	111	
		DC	112	

5.2-946

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 158)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	003	LAND (GROUND) AMBIGUOUS TYPE 2 (CONTINUED)		

		WOC	113	
		(ASOC) AIR SUPPORT	114	
		OPERATIONS CENTER		
		(TCO) TACTICAL COMBAT	115	
		OPERATIONS CENTER		
		(TOC) TACTICAL	116	
		OPERATIONS CENTER		
		(ARMY)		
		CHAPPARAL	117	
		FIRE DIRECTION CENTER	118	
		FIRE UNIT	119	
		DIVARTY	120	
		BATTERY	121	
		SELF-PROPELLED ARTILLERY	122	
		(GOC) GROUND OPERATIONS	123	
		CENTER		
		(ICC) INFORMATION	124	
		COORDINATION CENTER		
		(BOC) BATTERY OPERATIONS	125	
		CENTER		
		(ECS) ENGAGEMENT CONTROL	126	
		STATION		
		(PCP) PLATOON COMMAND	127	
		POST		
		(CRG) COMMUNICATIONS	128	
		RELAY GROUP		
		TUNNELS	129	
		RAILYARDS	130	
		BENCHMARK	131	
		TROOP	132	
		LANDING ZONE	133	
		DROP ZONE	134	
		ASSEMBLY OR STAGING AREA	135	
		DECONTAMINATION SITE	136	
		RE-ENTRY POINT/LINE	137	
		CROSSING AREA FOR		
		RECON PATROLS		
		SAM	138	
		SSM	139	
		ANTI-TANK WEAPON	140	
		DIRECT SUPPORT	141	
		GENERAL SUPPORT	142	
		INTERCEPTION	143	

5.2-947

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 159)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	003	LAND (GROUND) AMBIGUOUS TYPE 2 (CONTINUED)		

		BLOCKING	144	
		REINFORCING	145	
		REDEPLOYMENT	146	
		POLICING	147	
		INTRUDING	148	
		PREPARING BARRIER	149	
		DUMPING EQUIPMENT	150	
		RELIEF	151	
		CONVOY	152	
		ANTI-AIRCRAFT	153	
		AIR DEFENSE ARTILLERY	154	
		ARTILLERY	155	
		SURVEILLANCE	156	
		PICKETING	157	
		LOGISTICS SUPPORT	158	
		SEARCH	159	
		DIRECT ARTILLERY SUPPORT	160	
		GENERAL ARTILLERY	161	
		SUPPORT		
		MAINTAINING LINE OF	162	
		COMMUNICATION		
		COMMITTING	163	
		COUNTER-ATTACK	164	
		ELECTRONIC WARFARE	165	
		THREATEN	166	
		DESTROY	167	
		CONTACT	168	
		EVALUATION	169	
		TRANSPORTER	170	
		ARMORED VEHICLE	171	
		GUN	172	
		HALF TRACK	173	
		COMMUNICATIONS EQUIPMENT	174	
		TARGET	175	
		AIR DEFENSE SITE	176	
		FIM-92 STINGER	177	
		NIM-23 HAWK	178	
		MIM-42 REDEYE	179	
		MIM-72 CHAPARRAL	180	
		MIM-104 PATRIOT	181	
		RIM-2 TERRIER	182	
		RIM-7 SEA SPARROW	183	
		RIM-8 TALOS	184	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	003	LAND (GROUND) AMBIGUOUS TYPE 2 (CONTINUED)		
		RIM-24 TARTAR	185	
		RIM-66 STANDARD MISSILE	186	
		RIM-67 STANDARD MISSILE	187	
		BLOWPIPE	188	
		DISUSED	189	THROUGH 190
		SEA DART	191	
		DISUSED	192	THROUGH 193
		CROTALE	194	
		RAPIER	195	
		RBS-70/GIRAFFE	196	
		SAM BLOODHOUND	197	
		SAM ROLAND	198	
		SA-2 GUIDELINE	199	
		SA-3 GOA	200	
		SA-4 GANEF	201	
		SA-N-3 GOBLET	202	
		SA-5 GAMMON	203	
		SA-N-4 GECKO	204	
		SA-6 GAINFUL	205	
		SA-N-6 GRUMBLE	206	
		SA-7 GRAIL	207	
		SA-8 GECKO	208	
		SA-9 GASKIN	209	
		SA-10 GRUMBLE	210	
		SA-11 GADFLY	211	
		SA-12	212	
		SA-13 GOPHER	213	
		MISTRAL	214	
		SA-N-7 GADFLY	215	
		SA-N-8 GREMLIN	216	
		SA-14 GREMLIN	217	
		SA-16 GIMLET	218	
		SA-X-17	219	
		TOC (THAAD)	220	
		SSI (THAAD)	221	
		LCS (THAAD)	222	
		LAUNCHER (THAAD)	223	
		TMD-GBR (THAAD)	224	
		JTAGS	225	
		ADTOC/BN	226	
		ADTOC/BDE	227	
		ADCP	228	
		SM-2 BLOCK II	229	

FIELD CODING FOR J12.6C4

(SHEET 161)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	003	LAND (GROUND) AMBIGUOUS TYPE 2 (CONTINUED)		

		SM-2 BLOCK III	230	
		SM-2 BLOCK IIIA	231	
		SM-2 BLOCK IIIB	232	
		SM-2 BLOCK IV	233	
		SM-2 BLOCK IVA	234	
		SM-3 LEAP	235	
		SA-N-5 GRAIL	236	
		SA-N-11 GRISOM	237	
		SA-12A GLADIATOR	238	
		SA-12B GIANT	239	
		SA-14 GREMLIN	240	
		SA-15 GAUNTLET	241	
		SA-17 GRIZZLY	242	
		SA-N-12 GRIZZLY	243	
		SA-18 GROUSE	244	
		SA-19 GRISOM	245	
		RIM-116 RAM	246	
		ADATS	247	
		JAVELIN	248	
		STARBURST	249	
		STARSTREAK	250	
		ASPIDE	251	
		FRONT DOOR	252	
		ROLAND II	253	
		AKASH	254	
		ANZA	255	
		ANZA II	256	
		CSA-1	257	
		CSA-2	258	
		CSA-4	259	
		CSA-5	260	
		FM-80	261	
		HN-5	262	
		NK-7	263	
		NK-16	264	
		PANTZYR	265	
		RAPIER 2000/JERNAS	266	
		RBS-90	267	
		SAKR	268	
		SAVA	269	
		SHANINE	270	
		SKYGUARD ASPIDE	271	
		SPADA	272	

FIELD CODING FOR J12.6C4

(SHEET 162)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	003	LAND (GROUND) AMBIGUOUS TYPE 2 (CONTINUED)		

		TAM SAM	273	
		TIGERCAT	274	
		VANGUARD	275	
		SA-N-1 GOA	276	
		SA-N-9 GAUNTLET	277	
		SA-N-10	278	
		ALBATROS/ASPIDE	279	
		SM-1	280	
		SA-2 IRAQ MOD	281	
		SA-2 NORTH KOREA RO	282	
		AEGIS-TI	283	
		MASURGS	284	
		ROCK CAKE	285	
		SEA INDIGO	286	
		TANSAM	287	
		TOKEN A/D	288	
		GUARDSMAN	289	
		SILKWORM	290	
		SNOW DRIFT 11/17	291	
		TIGER S	292	
		TIGER G	293	
		TUBE ARM SA-11	294	
		SEACAT 262/903/904	295	
		AN/MPQ-4	296	
		AN-TPQ-36	297	
		AN/TPS-25	298	
		CYMBERLINE	299	
		PORK TROUGH 1	300	
		RASIT	301	
		SNAR-6	302	
		TALL MIKE	303	
		AN/FPN-33/36/40	304	
		AN/TPN-12/17	305	
		CPN-4, FPN-16/22	306	
		RP-2E	307	
		RP-4G	308	
		THD-1010/1013	309	
		TPN-8/14/18TSQ-7	310	
		TWO SPOT	311	
		CSA-X-2	312	
		ASR-0	313	
		FALCON-G	314	
		MARCON LN66TPS66	315	

5.2-951

MIL-STD-6016B

FIELD CODING FOR J12.6C4

(SHEET 163)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	003	LAND (GROUND) AMBIGUOUS TYPE 2 (CONTINUED)		

		SHEET BEND	316	
		WALL RUST A/B	317	
		DON-2	318	
		DONKAY/PALM FROND	319	
		EYE SHIELD	320	
		MARELD	321	
		PEEL PAIR	322	
		POT HEAD	323	
		RACAL-DECCA	324	
		RICE FIELD	325	
		RICE SCREEN	326	
		RICE CUP	327	
		SQUARE TIE	328	
		SS-N-2	329	
		STRUT CURVE	330	
		STRUT PAIR	331	
		BOFI	332	
		CORN CAN	333	
		DRUM TILT	334	
		ELDORADO	335	
		FLAP WHEEL	336	
		FLEDERMAUS	337	
		FLYCATCHER	338	
		GEPARD	339	
		GUN DISH	340	
		SPAAMG	341	
		TEAMPLAY	342	
		TEAMWORK	343	
		VULCAN	344	
		9LV 200	345	
		AN/SPG-50	346	
		BASS TILT	347	
		GOALKEEPER	348	
		HAWK SCREECH	349	
		KITE SCREECH A/B	350	
		OWL SCREECH	351	
		MARK 68 FCS	352	
		MK 57/63 GFCS	353	
		MK-86 GFCS	354	
		MUFF COB	355	
		SIGNAAL STIR 180	356	
		SUN VISOR	357	
		TOP BOW	358	

5.2-952

MIL-STD-6016B

FIELD CODING FOR J12.6C4 (SHEET 164)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	003	LAND (GROUND) AMBIGUOUS TYPE 2 (CONTINUED)		

		TYPE 341	359	
		VEGA	360	
		WM-20 SERIES	361	
		MARCONI S613	362	
		THIN SKIN	363	
		AN/FPS-77	364	
		MRL-1	365	
		MRL-4/5	366	
		BIG BIRD	367	
		SIDE NET	368	
		ODD LOT/PAIR/GROUP	369	
		FIRE WHEEL/MOD	370	
		BARLOCK	371	
		FIRECAN/WHIFF	372	
		GIN SLING	373	
		FRUSKA GORA	374	
		TIN SHIELD	375	
		BIG BAR/MESH	376	
		SS-N-S SCOOP PAIR	377	
		SGR-105 DA-01/00	378	
		CROSS SLOT	379	
		BACK NET/TRAP	380	
		GATE POLE/HIGH/POST	381	
		TOP LOT	382	
		RICE CAKE	383	
		JY-14/9	384	
		TIN TRAP	385	
		HEAD NET A/B/C	386	
		SLIM/SEA/HAIR NET	387	
		LOW SIEVE	388	
		EGG CUP	389	
		CUT WEB	390	
		SKYWATCH	391	
		HALF PLATE	392	
		SKIN HEAD	393	
		SIEVE FAMILY	394	
		SO-A	395	
		HIGH SHELL	396	
		AN/FPS-6/89	397	
		DECCA HF200	398	
		MARCONI 5244	399	
		TYPE 88 MK 1	400	
		MARCONI S-247	401	

5.2-953

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	003	LAND (GROUND) AMBIGUOUS TYPE 2 (CONTINUED)		
		AN/MPN-11	402	
		RAT-31S	403	
		AA4 MK 6/7	404	
		AN/TPS-43	405	
		SCR-584	406	
		AN/TPS-48	407	
		MARCONI S-1006/269	408	
		PALMIER	409	
		FIREFINDER LR	410	
		VOLEX III/IV	411	
		THD-1940	412	
		HADR (HR-3000)	413	
		AN/RPS-70/72/75	414	
		MPDR-18/S	415	
		WATCHMAN	416	
		MARCONI S-631/647	417	
		MARCONI S-706/711/712	418	
		AN/TPS-73	419	
		TRS-22XX	420	
		AN/SPS-8	421	
		DECCA AWS-1	422	
		MK-26	423	
		AN/SPS-48	424	
		RAN-7S	425	
		SEA TIGER	426	
		DA-08/2LS	427	
		AWS-9 (TYPE 996)	428	
		DA-05/00	429	
		MPDR-45	430	
		TOP STEER/PLATE	431	
		STRIKE OUT	432	
		SPONGE CAKE	433	
		NC1 ROLAND	434	
		NC1 MISTRAL	435	
		FDOC	436	
		MCT	437	
		CETAC	438	
		ISARD	439	
		UNDEFINED	440 THROUGH 4000	
		WAYPOINT	4001	
		STRIKE INITIAL POINT	4002	
		UNDEFINED	4003 THROUGH 4093	
		RESET TO NO STATEMENT	4094	

5.2-954

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	003	LAND (GROUND) AMBIGUOUS TYPE 2 (CONTINUED) ----- UNDEFINED	4095	
369	003	AMBIGUOUS TYPE 1 PROBABILITY ----- 0 THROUGH 1 NO STATEMENT	0 THROUGH 510 511	EXPRESSES THE PROBABILITY THAT THE SPECIFIC TYPE IS THE ALTERNATIVE SPECIFIC TYPE PROVIDED IN THE AMBIGUOUS TYPE 1 FIELD. THE PROBABILITY SHALL REFLECT BOTH THE CONFIDENCE IN THE TYPE IDENTIFICATION SOURCES AND THE CONFIDENCE THAT THE TYPE IDENTIFICATION IS CORRECTLY CORRELATED TO THIS TARGET. INFORMATION IN THIS FIELD SHALL BE DERIVED ONLY FROM ONBOARD SOURCES AS OPPOSED TO DATA LINK SOURCES. IN 0.00196 INCREMENTS.
369	004	AMBIGUOUS TYPE 2 PROBABILITY ----- 0 THROUGH 1 NO STATEMENT	0 THROUGH 510 511	EXPRESSES THE PROBABILITY THAT THE SPECIFIC TYPE IS THE ALTERNATIVE SPECIFIC TYPE PROVIDED IN THE AMBIGUOUS TYPE 2 FIELD. THE PROBABILITY SHALL REFLECT BOTH THE CONFIDENCE IN THE TYPE IDENTIFICATION SOURCES AND THE CONFIDENCE THAT THE TYPE IDENTIFICATION IS CORRECTLY CORRELATED TO THIS TARGET. INFORMATION IN THIS FIELD SHALL BE DERIVED ONLY FROM ONBOARD SOURCES AS OPPOSED TO DATA LINK SOURCES. IN 0.00196 INCREMENTS.

5.2-955

MIL-STD-6016B

.....

WORD TITLE: FUTURE EVENT CONTINUATION WORD

24	23	22:	21	20	19	18	17	16:	15	14	13	12	11	10:	09	08	07:	06	05	04	03	02:	01	00:			
<---			:	TIME OF EVENT, SECOND					:	TIME OF EVENT, MINUTE					:	FUTURE EVENT			:	CONTINUATION WORD LABEL				:	WORD FORMAT		:
			:						:						:	DESCRIPTOR			:					:			:
			:	6					:	6					:	3			:	5				:	2		:

49	48	47	46	45	44	43	42:	41	40	39	38	37	36	35:	34	33	32	31	30	29:	28	27	26	25						
							:								:								:	TIME OF EVENT, HUNDREDTHS						
<---							:	EVENT DURATION, HUNDREDTHS							:	EVENT DURATION, SECONDS							:							
							:								:								:							
							:	7							:	6							:	7						

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50
:																				
:																				
:											SPARE									
:																				
:											28									

WORD DESCRIPTION

WORD NUMBER: J12.6C5

WORD TITLE: FUTURE EVENT CONTINUATION WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	00101
857 001	FUTURE EVENT DESCRIPTOR	7-	9 3	
797 002	TIME OF EVENT, MINUTE	10-	15 6	
380 003	TIME OF EVENT, SECOND	16-	21 6	
380 004	TIME OF EVENT, HUNDREDTHS	22-	28 7	
380 005	EVENT DURATION, SECONDS	29-	34 6	
380 006	EVENT DURATION, HUNDREDTHS	35-	41 7	
756 028	SPARE	42-	69 28	

FIELD CODING FOR J12.6C5 (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
857	001	FUTURE EVENT DESCRIPTOR -----		USED IN CONJUNCTION WITH THE TIME INDICATOR FIELD FOR DESCRIBING FUTURE EVENTS.
		NO STATEMENT	0	
		SWAP RADAR CHANNELS	1	AT THE TIME OF EVENT SPECIFIED, THE ADDRESSED PLATFORM WILL SWITCH TO THE RADAR CHANNEL OR CHANNEL SET PROVIDED IN THE J12.6C6 WORD.
		ENABLE PREDETERMINED TARGET JAMMING	2	AT THE TIME OF EVENT SPECIFIED, THE ADDRESSED PLATFORM WILL ENABLE A PREDEFINED COUNTER MEASURES TECHNIQUE AGAINST THE TARGET. A DURATION TIME FOR JAMMING MAY BE SPECIFIED USING THE EVENT DURATION FIELDS.
		LAUNCH MISSILE	3	AT THE TIME OF EVENT SPECIFIED, THE ADDRESSED PLATFORM WILL LAUNCH A MISSILE AT THE TARGET.
		UNDEFINED	4 THROUGH 7	
797	002	TIME OF EVENT, MINUTE -----		THE MINUTE (NETWORK TIME) AT WHICH THE EVENT WILL OCCUR AGAINST THE TARGET. THE MINUTE IS THE NEXT OCCURRENCE OF THE MINUTE SPECIFIED, WITH RESPECT TO NETWORK TIME.
		0 THROUGH 59 ILLEGAL NO STATEMENT	0 THROUGH 59 60 THROUGH 62 63	IN ONE MINUTE INCREMENTS.
380	003	TIME OF EVENT, SECOND -----		THE SECOND (NETWORK TIME) AT WHICH THE EVENT WILL OCCUR AGAINST THE TARGET.
		0 THROUGH 59 ILLEGAL NO STATEMENT	0 THROUGH 59 60 THROUGH 62 63	IN ONE SECOND INCREMENTS.
380	004	TIME OF EVENT, HUNDREDTHS -----		THE HUNDREDTHS OF A SECOND (NETWORK TIME) AT WHICH THE EVENT WILL OCCUR AGAINST THE TARGET.
		0 THROUGH 99 HUNDREDTHS ILLEGAL NO STATEMENT	0 THROUGH 99 100 THROUGH 126 127	IN HUNDREDTHS OF SECOND INCREMENTS.

5.2-958

MIL-STD-6016B

FIELD CODING FOR J12.6C5 (SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
380	005	EVENT DURATION, SECONDS ----- 0 THROUGH 59 ILLEGAL NO STATEMENT	0 THROUGH 59 60 THROUGH 62 63	THE LENGTH OF TIME THE EVENT WILL OCCUR AGAINST THE TARGET. IN ONE SECOND INCREMENTS.
380	006	EVENT DURATION, HUNDREDTHS ----- 0 THROUGH 99 HUNDREDTHS ILLEGAL NO STATEMENT	0 THROUGH 99 100 THROUGH 126 127	THE LENGTH OF TIME THE EVENT WILL OCCUR AGAINST THE TARGET. IN HUNDREDTHS OF SECOND INCREMENTS.

WORD TITLE: SENSOR MANAGEMENT CONTINUATION WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00				
												:SS/		:SENSOR TYPE:				CONTINUATION WORD				: WORD		:				
<---												:	:COM:				INDICATOR				: LABEL				:FORMAT		:	
												:	:IND:												:	:		
												:	12				:	1		3		:	5		:	2		:

:	49	48	47	46	45:	44	43	42	41	40:	39	38	37	36	35	34	33	32	31:	30:	29	28:	27	26	25					
:						:	AIR-GROUND WEAPON :															:	PDI: FREQ :		SENSOR					
:	WEAPON ID					:	DATA LINK CHANNEL :					PDI/MISSILE DATA LINK CHANNEL										:	IND: AGIL :		CHANNEL SET					
:						:						:											:	IND :						
:	5					:	5					:	9										:	1 :		2 :		5		

:	69	68	67	66	65:	64	63	62	61:	60	59	58	57	56	55	54	53:	52	51	50:		
:	SPARE					:	ARM TYPE			:	ARM THREAT NUMBER								:	RADAR PRF		:
:	5					:	4			:	8								:	3		:

WORD DESCRIPTION

WORD NUMBER: J12.6C6

WORD TITLE: SENSOR MANAGEMENT CONTINUATION WORD

REFERENCE		BIT #	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS
			RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0- 1	2
1551 001	CONTINUATION WORD LABEL	2- 6	5
359 003	SENSOR TYPE INDICATOR	7- 9	3
359 004	SENSOR STATUS/COMMAND	10	1
	INDICATOR (SS/COM IND)		
359 005	SENSOR CHANNEL/CODE	11- 22	12
359 006	SENSOR CHANNEL SET	23- 27	5
1203 001	FREQUENCY AGILITY INDICATOR	28- 29	2
	(FREQ AGIL IND)		
1204 001	PDI INDICATOR (PDI IND)	30	1
1204 002	PDI/MISSILE DATA LINK CHANNEL	31- 39	9
1206 001	AIR-GROUND WEAPON DATA LINK	40- 44	5
	CHANNEL		
700 001	WEAPON ID	45- 49	5
1943 001	RADAR PRF	50- 52	3
1207 001	ARM THREAT NUMBER	53- 60	8
1207 002	ARM TYPE	61- 64	4
756 005	SPARE	65- 69	5

FIELD CODING FOR J12.6C6 (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
359	003	SENSOR TYPE INDICATOR -----		SELECTS DATA APPLICABILITY IN SENSOR STATUS/COMMAND, CHANNEL CODE, AND CHANNEL SET FIELDS.
		NO STATEMENT	0	
		RADAR CHANNEL	1	THE SENSOR DATA IN THE SENSOR STATUS/COMMAND, CHANNEL/CODE, AND CHANNEL SET FIELDS REPRESENTS RADAR DATA.
		LASER ILLUMINATOR CODE	2	THE SENSOR DATA IN THE SENSOR STATUS/COMMAND, CHANNEL/CODE, AND CHANNEL SET FIELDS REPRESENTS LASER ILLUMINATOR DATA.
		LASER TRACKER CODE	3	THE SENSOR DATA IN THE SENSOR STATUS/COMMAND, CHANNEL/CODE, AND CHANNEL SET FIELDS REPRESENTS LASER TRACKER DATA.
		UNDEFINED	4 THROUGH 7	
359	004	SENSOR STATUS/COMMAND INDICATOR -----		INDICATES VALUES SET IN OTHER FIELDS ARE COMMANDS.
		SENSOR STATUS	0	DATA IN THE SENSOR CHANNEL/CODE AND CHANNEL SET, FREQUENCY AGILITY INDICATOR, PDI INDICATOR, PDI/ MISSILE DATA LINK CHANNEL, A/G WEAPON DATA LINK CHANNEL, AND RADAR PRF FIELDS REPRESENT THE SENDER'S CURRENT STATUS.
		SENSOR COMMAND	1	DATA IN THE SENSOR CHANNEL/CODE AND CHANNEL SET, FREQUENCY AGILITY INDICATOR, PDI INDICATOR, PDI/ MISSILE DATA LINK CHANNEL, A/G WEAPON DATA LINK CHANNEL, AND RADAR PRF FIELDS REPRESENT THE COMMANDED VALUES FROM THE SENDER.
359	005	SENSOR CHANNEL/CODE -----		PROVIDES THE SENDER'S CURRENT RADAR CHANNEL, LASER CODE OF ILLUMINATOR OR TRACKER.
		----- FOR SENSOR TYPE INDICATOR = 0 -----		

MIL-STD-6016B

FIELD CODING FOR J12.6C6

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
359	005	SENSOR CHANNEL/CODE -----	(CONTINUED)	
		ILLEGAL	2889 THROUGH 4095	AND 9'S ARE NOT ALLOWED.
359	006	SENSOR CHANNEL SET -----		PROVIDES THE CHANNEL SET IN A SENDER'S RADAR.
		NO STATEMENT	0	
		CHANNEL SET 1 THROUGH 31	1 THROUGH 31	CURRENT RADAR CHANNEL SET OF THE SENDER IF THE SENSOR TYPE INDICATOR IS SET TO 1 AND THE SENSOR STATUS/COMMAND INDICATOR IS SET TO 0. IF THE SENSOR STATUS/ COMMAND INDICATOR IS SET TO 1, THEN THIS IS THE COMMANDED CHANNEL SET FROM THE SENDER.
1203	001	FREQUENCY AGILITY INDICATOR -----		INDICATES THE SENSOR'S RADAR IS IN THE FREQUENCY AGILITY MODE OR THE COMMANDED MODE.
		FIXED FREQUENCY MODE	0	INDICATES FIXED FREQUENCY MODE IS ENABLED IN THE SENDER'S RADAR IF THE SENSOR STATUS/COMMAND INDICATOR FIELD IS SET TO 0. IF THE SENSOR STATUS/COMMAND INDICATOR FIELD IS SET TO 1, THEN THIS IS THE COMMANDED MODE OF OPERATION FROM THE SENDER.
		FREQUENCY AGILE MODE	1	INDICATES FREQUENCY AGILE MODE IS ENABLED IN THE SENDER'S RADAR IF THE SENSOR STATUS/COMMAND INDICATOR FIELD IS SET TO 0. IF THE SENSOR STATUS/COMMAND INDICATOR FIELD IS SET TO 1, THEN THIS IS THE COMMANDED MODE OF OPERATION FROM THE SENDER.
		UNDEFINED	2 THROUGH 3	
1204	001	PDI INDICATOR -----		INDICATES PDI/MISSILE DATA LINK CHANNEL FIELD CONTAINS PDI CHANNEL DATA.
		MISSILE DATA LINK CHANNEL REPORTED	0	INDICATES THAT THE PDI/MISSILE DATA LINK CHANNEL FIELD CONTAINS MISSILE DATA LINK CHANNEL DATA.
		PDI CHANNEL REPORTED	1	INDICATES THAT THE PDI/MISSILE DATA

5.2-964

MIL-STD-6016B

FIELD CODING FOR J12.6C6

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1204	001	PDI INDICATOR -----	(CONTINUED)	
				LINK CHANNEL CONTAINS PDI CHANNEL DATA.
1204	002	PDI/MISSILE DATA LINK CHANNEL -----		RADAR CHANNEL SELECTED FOR PDI.
		NO STATEMENT	0	
		CHANNEL 1 THROUGH 511	1 THROUGH 511	DEFINES THE RADAR CHANNEL SELECTED FOR PULSE DOPPLER ILLUMINATION OR AIR-TO-AIR MISSILE DATA LINK.
1206	001	AIR-GROUND WEAPON DATA LINK CHANNEL -----		DEFINES THE AIR-GROUND WEAPON DATA LINK CHANNEL SELECTED.
		NO STATEMENT	0	
		CHANNEL 1 THROUGH 31	1 THROUGH 31	DEFINES THE A/G WEAPON DATA LINK CHANNEL SELECTED FOR USE AGAINST THE TARGET.
700	001	WEAPON ID -----		DEFINES THE IDENTIFICATION NUMBER OF THE SELECTED WEAPON.
		NO STATEMENT	0	
		WEAPON 1 THROUGH 31	1 THROUGH 31	DEFINES THE AIR-TO-AIR OR AIR-TO-GROUND MISSILE IDENTIFICATION NUMBER THAT HAS BEEN SELECTED FOR USE AGAINST THE TARGET.
1943	001	RADAR PRF -----		SPECIFIES THE RADAR PRF SELECTED. MAY BE USED IN CONJUNCTION WITH SENSOR TYPE AND JAMMER TYPE.
		NO STATEMENT	0	
		LOW (>0, <4.0 KHZ)	1	
		MEDIUM (>=4.0 KHZ <20 KHZ)	2	
		HIGH (>=20 KHZ, <300 KHZ)	3	
		MISSILE COMPATIBLE (>=300 KHZ)	4	
		UNDEFINED	5 THROUGH 7	
1207	001	ARM THREAT NUMBER -----		PROVIDES A WEAPON-UNIQUE THREAT NUMBER ASSIGNED TO A TARGET.
		NO STATEMENT	0	

5.2-965

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1207	001	ARM THREAT NUMBER ----- THREAT NUMBER 1 THROUGH 255	(CONTINUED) 1 THROUGH 255	PROVIDES THE ARM-SPECIFIC THREAT NUMBER ASSOCIATED WITH THE TARGET. THE TYPE OF THREAT CORRESPONDS TO EACH THREAT NUMBER WHICH IS DEPENDENT UPON THE ARM TYPE AND MAY BE PREBRIEFED PRIOR TO THE MISSION.
1207	002	ARM TYPE ----- NO STATEMENT AGM 88 AGM 45 UNDEFINED	 0 1 2 3 THROUGH 15	INDICATES THE TYPE OF ARM THREAT NUMBER IN THE ARM THREAT NUMBER FIELD.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: TARGET SORTING - KINEMATIC DATA 1 CONTINUATION WORD 7
(NEEDLINE ONLY)

	49:	48	47	46	45	44	43	42	41	40:	39	38	37	36	35	34	33	32	31:	30	29	28	27	26	25
<---	:					VARIANCE XZ			:					VARIANCE XY					:						
	:					9			:					9					:						

:	69	68	67	66:	65	64	63	62	61	60	59	58:	57	56	55	54	53	52	51	50	
:	SPARE			:	DIVE ANGLE								:	VARIANCE YZ							
:	4			:	8								:	9							

WORD DESCRIPTION

WORD NUMBER: J12.6C7

WORD TITLE: TARGET SORTING - KINEMATIC DATA 1 CONTINUATION WORD 7
(NEEDLINE ONLY)

REFERENCE			BIT	#	
DFI/DUI	DATA FIELD	DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD	FORMAT	0-	1 2	01
1551 001	CONTINUATION	WORD LABEL	2-	6 5	00111
1120 001	VARIANCE	XX	7-	14 8	LOGARITHMIC CODING. SEE NOTE 1.
1120 002	VARIANCE	YY	15-	22 8	SAME CODING AS FOR BITS 7-14.
1120 003	VARIANCE	ZZ	23-	30 8	SAME CODING AS FOR BITS 7-14.
1120 004	VARIANCE	XY	31-	39 9	LOGARITHMIC CODING. SEE NOTE 1.
1120 005	VARIANCE	XZ	40-	48 9	SAME CODING AS FOR BITS 31-39.
1120 006	VARIANCE	YZ	49-	57 9	SAME CODING AS FOR BITS 31-39.
1890 001	DIVE	ANGLE	58-	65 8	LINEAR CODING.
756 004	SPARE		66-	69 4	

NOTE 1

VARIANCE CODING

X: real variance value (X = Var XX, Var YY, Var ZZ, Var XY, Var XZ or Var YZ)

|X| : absolute value of X

I(|X|) : logarithmic coding of the variance value

$$I(|X|) = \text{INTEGER} \left((2^8 - 3) \frac{\ln\left(\frac{|X|}{X_{\min}}\right)}{\ln\left(\frac{X_{\max}}{X_{\min}}\right)} \right) + 1$$

with $X_{\min} = 25 \text{ m}^2$ and $X_{\max} = 2294 \cdot 10^6 \text{ m}^2$

$$I(|X|) = \text{INTEGER} \left(13.799 * \ln \left(\frac{|X|}{25} \right) \right) + 1$$

if ($|X|$) < $X_{\min}$ then I (X) = 0
 if ($|X|$) > $X_{\max}$ then I (X) = 254

Cross terms (Var XY, Var XZ, Var YZ) may have a sign, so logarithmic function applies only to the absolute value of X. So a 8 bit code is used to integrate the sign.

if X > 0 then I (X) = I ($|X|$)
 if X < 0 then I (X) = I ($|X|$) + 256

FIELD CODING FOR J12.6C7

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1120	001	VARIANCE XX -----		VARIANCE IN RELATION TO X AXIS
		NUMERIC	0 THROUGH 254	0 M**2 THROUGH 2294*10**6 M**2 WITH A LOGARITHMIC CODING
		NO STATEMENT	255	
1120	004	VARIANCE XY -----		VARIANCE IN RELATION TO X AND Y AXES
		NUMERIC	0 THROUGH 254	0 M**2 THROUGH 2294*10**6 M**2 WITH A LOGARITHMIC CODING
		ILLEGAL NUMERIC	255 256 THROUGH 510	0 M**2 THROUGH -2294*10**6 M**2 WITH A LOGARITHMIC CODING
		NO STATEMENT	511	
1890	001	DIVE ANGLE -----		EXPRESSES THE ANGULAR DIVE OF AIRCRAFT MEASURED FROM THE HORIZONTAL. ABOVE HORIZONTAL ANGLES ARE POSITIVE. BELOW HORIZONTAL ANGLES ARE NEGATIVE.
		NUMERIC	0 THROUGH 90	0 THROUGH 90 DEGREE IN ONE DEGREE INCREMENTS WITH LINEAR CODING.
		NUMERIC	91 THROUGH 180	-1 THROUGH -90 DEGREE IN ONE DEGREE INCREMENTS WITH LINEAR CODING.
		ILLEGAL NO STATEMENT	181 THROUGH 254 255	

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

J12.7 MESSAGE SUMMARY

PURPOSE

The J12.7 Target Bearing message is used by nonC² JUs to exchange target reports using polar coordinates and may include range, bearing, elevation, rate and uncertainty data.

DATA ELEMENT SUMMARY

<u>J12.7I</u>		<u>J12.7C1</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	WORD FORMAT	2
LABEL, J-SERIES	5	CONTINUATION WORD LABEL	5
SUBLABEL, J-SERIES	3	RANGE, 1	16
MESSAGE LENGTH INDICATOR	3	RANGE UNCERTAINTY	4
INDEX NUMBER	6	SPARE	1
FUSION TYPE	1	RANGE RATE	13
MERGED MEASUREMENT INDICATOR	1	RANGE RATE UNCERTAINTY	5
END OF TARGET REPORTING CYCLE	1	OBSERVER VELOCITY NORTH	12
SENSOR TYPE	4	OBSERVER VELOCITY EAST	12
JAMMER TYPE	3		
LATITUDE, 0.0103 MINUTE	20		
LONGITUDE, 0.0103 MINUTE	21		
<u>J12.7E0</u>		<u>J12.7C2</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	WORD FORMAT	2
ALTITUDE, ANGLE ORIGIN	11	CONTINUATION WORD LABEL	5
ELEVATION ANGLE, 2	15	PROBABILITY OF OWN FORCES	9
BEARING, INTERCEPT	16	PROBABILITY OF ENEMY FORCES	9
ELEVATION UNCERTAINTY	5	SPACE AMBIGUOUS TYPE 1(12)*****	
BEARING UNCERTAINTY	5	AIR AMBIGUOUS TYPE 1(12)	*
FREQUENCY, INTERCEPT	10	SURFACE (MARITIME) AMBIGUOUS	*
FREQUENCY EXPONENT	4	TYPE 1(12)	*
SPARE	2	SUBSURFACE (MARITIME)	*
		AMBIGUOUS TYPE 1(12)	*
		LAND (GROUND) AMBIGUOUS TYPE	*
		1(12)	*
		SPARE(12)*****	12
		SPACE AMBIGUOUS TYPE 2(12)*****	
		AIR AMBIGUOUS TYPE 2(12)	*
		SURFACE (MARITIME) AMBIGUOUS	*
		TYPE 2(12)	*
		SUBSURFACE (MARITIME)	*
		AMBIGUOUS TYPE 2(12)	*
		LAND (GROUND) AMBIGUOUS TYPE	*
		2(12)	*
		SPARE(12)*****	12
		AMBIGUOUS TYPE 1 PROBABILITY	9
		AMBIGUOUS TYPE 2 PROBABILITY	9
		ENVIRONMENT/CATEGORY	3
<u>J12.7E1</u>		<u>J12.7C3</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	WORD FORMAT	2
TIME INDICATOR	3	CONTINUATION WORD LABEL	5
MINUTE	6	OBSERVER VELOCITY DOWN	12
SECOND	6		
HUNDREDTHS	7		
BEARING ANGLE RATE	9		
BEARING ANGLE RATE UNCERTAINTY	5		
ELEVATION ANGLE RATE	9		
ELEVATION ANGLE RATE	5		
UNCERTAINTY			
EMITTER PRF	3		
EMITTER STATUS	3		
SPARE	12		

MIL-STD-6016B

J12.7 MESSAGE SUMMARY (Continued)

DATA ELEMENT SUMMARY (Continued)

J12.7C3 (Continued)	
DATA ELEMENT	# BITS
SPARE	51

MIL-STD-6016B

J12.7 TRANSMIT/RECEIVE RULES

TITLE: Target Bearing Message

TRANSMIT RULES

1. The J12.7 Target Bearing message shall be transmitted periodically by nonC² JUs on detection and thereafter not more frequently than an RRN of 8 (3 seconds) as long as the detection continues.
2. The J12.7 message shall not be transmitted unless the originator's Geodetic Position Quality (GPQ) is better than value 8 (5-15,1).
3. Although there is not a J12.7 basic message, the normal word sequence used to report a 2-dimensional detection is J12.7I/J12.7E0/J12.7E1. The time fields in the J12.7E1 word relate to all data including Latitude and Longitude, i.e., data is not extrapolated to time of transmission.
4. The J12.7C2 word shall be transmitted as follows:
 - a. At the first transmission of the J12.7I word after target identification is initially evaluated.
 - b. Every 8 transmissions of the J12.7I word.
 - c. At the next periodic transmission of the J12.7I word after any data in the J12.7C2 word changes.
5. The J12.7C1 and J12.7C2 words may be included in any transmission if data are available. If the J12.7C1 word is transmitted, then both the J12.7E0 and J12.7E1 must be transmitted. The J12.7C2 word may be transmitted in a J12.7I/J12.7C2 word sequence. However, in any transmission, if the J12.7E0 word is omitted, then the J12.7E1 must be omitted as well. When restricted to 3-word message sequences, a J12.7I/J12.7E0/J12.7E1, followed by a J12.7I/J12.7C1/J12.7C2 sequence is used, with the J12.7C2 optional.
6. Any time there is a 95% probability that the calculated position quality of the detection is within 4.4 square data miles, a J12.6 message must also

J12.7 TRANSMIT/RECEIVE RULES (Continued)

be transmitted in accordance with the J12.6 T/R rules. JUs are not required to transmit a J12.7 message on a target when a J12.6 message is being transmitted on that target.

RECEIVE RULES

1. Purging of received data is a system option.
2. Any valid word sequence shall be accepted.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD NUMBER: J12.7I

WORD TITLE: TARGET BEARING INITIAL WORD

24	23	22:	21:	20:	19:	18	17	16	15	14	13:	12	11	10:	09	08	07:	06	05	04	03	02:	01	00:		
		:EOT:MM		:	:							: MESSAGE		:	: SUBLABEL,		:							:	WORD	:
SENSOR TYPE		:RC		:	IND:FT	:	INDEX NUMBER						:	: LENGTH		:	: J-SERIES		:	LABEL, J-SERIES			:	FORMAT	:	
		:	:	:	:							:	: INDICATOR		:	:	:	:				:	:	:		
4		:	1	:	1	:	1	:	6			:	3		:	3		:	5			:	2		:	

	49:	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29:	28	27	26:	25
<---	:									LATITUDE, 0.0103 MINUTE											:				:
	:																				:	JAMMER TYPE:		-->	:
	:																				:			:	:
	:									20											:	3		:	:

```

: 69 68 67 66 65 64 63 62 61 60 59 58 57 56 55 54 53 52 51 50
:
:
: LONGITUDE, 0.0103 MINUTE
:
:
: 21

```

WORD DESCRIPTION

WORD NUMBER: J12.7I
WORD TITLE: TARGET BEARING INITIAL WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	00
270 004	LABEL, J-SERIES	2-	6 5	01100
271 005	SUBLABEL, J-SERIES	7-	9 3	111
800 001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
768 002	INDEX NUMBER	13-	18 6	
1301 001	FUSION TYPE (FT)	19	1	
325 002	MERGED MEASUREMENT INDICATOR (MM IND)	20	1	
312 001	END OF TARGET REPORTING CYCLE (EOTRC)	21	1	
1953 001	SENSOR TYPE	22-	25 4	
1933 001	JAMMER TYPE	26-	28 3	
281 017	LATITUDE, 0.0103 MINUTE	29-	48 20	
282 013	LONGITUDE, 0.0103 MINUTE	49-	69 21	

FIELD CODING FOR J12.7I

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
768	002	INDEX NUMBER ----- NO STATEMENT NUMERIC	0 1 THROUGH 63	A VALUE ASSIGNED BY THE ORIGINATOR TO DIFFERENTIATE AMONG SENSOR TARGET REPORTS.
1301	001	FUSION TYPE ----- SENSOR FUSION DATA FUSION	0 1	INDICATES THE TYPE OF FUSION USED TO PRODUCE REPORTED SENSOR INFORMATION. INDICATES THAT SENSOR DATA REPORT IS A RESULT OF INFORMATION FROM ONBOARD SENSORS. INDICATES THAT SENSOR DATA REPORT IS A RESULT OF INFORMATION FROM ONBOARD SENSORS COMBINED WITH THAT RECEIVED FROM REMOTE SOURCES.
325	002	MERGED MEASUREMENT INDICATOR ----- NO STATEMENT MULTIPLE TARGETS	0 1	INDICATES A SENSOR CAN DETECT MORE THAN ONE TARGET BUT CANNOT SEPARATE THEM.
312	001	END OF TARGET REPORTING CYCLE ----- NO STATEMENT THE TARGET IS THE LAST TARGET IN AN UPDATE SEQUENCE TO BE TRANSMITTED	0 1	INDICATES ALL TARGETS HELD BY THE SENDING UNIT HAVE BEEN SENT. INDICATES THAT THE TARGET IS THE LAST TARGET TO BE TRANSMITTED IN THE SENDER'S TARGET REPORTING CYCLE. THE NEXT TARGET TO BE TRANSMITTED WILL BE THE BEGINNING OF THE NEXT CYCLE. THIS INDICATES THAT A COMPLETE SET OF TARGETS HAS BEEN TRANSMITTED. THIS PROVIDES THE RECEIVER WITH AN INDICATION THAT ALL TARGETS HELD BY THE SENDING UNIT HAVE BEEN TRANSMITTED.
1953	001	SENSOR TYPE ----- NO STATEMENT TELEVISION INFRARED	0 1 2	IDENTIFIES THE TYPE OF SENSOR USED TO DETECT THE TARGET.

5.2-980

MIL-STD-6016B

FIELD CODING FOR J12.7I

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1953	001	SENSOR TYPE -----	(CONTINUED)	
		ELECTRONIC WARFARE SUPPORT	3	
		JAM STROBE	4	
		VISUAL	5	
		RADAR	6	
		ANTI RADIATION MISSILE (ARM)	7	
		LASER DETECTOR/TRACKER	8	
		RADAR WARNING RECEIVER	9	
		SENSOR FUSION DATA (SENSOR NOT STATED)	10	
		PASSIVE RADAR	11	
		UNDEFINED	12 THROUGH 15	
1933	001	JAMMER TYPE -----		SPECIFIES THE TYPE OF JAMMER BEING ENCOUNTERED. MAY BE USED IN CONJUNCTION WITH SENSOR TYPE.
		NO STATEMENT	0	
		VELOCITY DECEPTION	1	
		RANGE DECEPTION	2	
		NOISE JAMMING	3	
		ANGLE DECEPTION	4	
		UNDEFINED	5 THROUGH 7	
281	017	LATITUDE, 0.0103 MINUTE -----		THE PRECISION IS APPROXIMATELY 63 FEET. IN 90/524,287 DEGREE INCREMENTS.
		0 DEGREES	0	
		+90/524,287 THROUGH +90 DEGREES NORTH	1 THROUGH 524287	
		NO STATEMENT	524288	
		-90 THROUGH -90/524,287 DEGREES SOUTH	524289 THROUGH 1048575	
282	013	LONGITUDE, 0.0103 MINUTE -----		THE PRECISION IS APPROXIMATELY 63 FEET. IN 180/1,048,575 DEGREE INCREMENTS.
		0 DEGREES	0	
		+180/1,048,575 THROUGH +180 DEGREES EAST	1 THROUGH 1048575	
		NO STATEMENT	1048576	

5.2-981

MIL-STD-6016B

FIELD CODING FOR J12.7I (SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
282	013	LONGITUDE, 0.0103 MINUTE	(CONTINUED)	

		-180 THROUGH	1048577 THROUGH 2097151	
		-180/1,048,575 DEGREES		
		WEST		

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J12.7E0

WORD TITLE: TARGET BEARING EXTENSION WORD 0

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00	:															
ELEVATION ANGLE, 2												:	ALTITUDE, ANGLE ORIGIN										:	WORD	:															
												:											:	FORMAT	:															
												:											:		:															
15												:	11										:	2	:															
49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25	:															
:	ELEVATION				:	BEARING, INTERCEPT																:			:															
<---	:	UNCERTAINTY				:																:			---															
:					:																	:			:															
:	5				:	16																:			:															
:					:																	:					:													
					:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50															
					:	FREQUENCY				:	FREQUENCY, INTERCEPT										:	BEARING																		
					:	SP	:	EXPONENT				:											:	UNCERTAINTY																
					:					:											:																			
					:	2	:	4				:	10										:	5																

WORD DESCRIPTION

WORD NUMBER: J12.7E0

WORD TITLE: TARGET BEARING EXTENSION WORD 0

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	10
365 001	ALTITUDE, ANGLE ORIGIN	2-	12 11	
428 003	ELEVATION ANGLE, 2	13-	27 15	
372 001	BEARING, INTERCEPT	28-	43 16	
353 011	ELEVATION UNCERTAINTY	44-	48 5	
353 010	BEARING UNCERTAINTY	49-	53 5	
417 001	FREQUENCY, INTERCEPT	54-	63 10	
1963 001	FREQUENCY EXPONENT	64-	67 4	
756 002	SPARE (SP)	68-	69 2	

FIELD CODING FOR J12.7E0

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
365	001	ALTITUDE, ANGLE ORIGIN ----- 0 THROUGH 204,600 FT NO STATEMENT	0 THROUGH 2046 2047	EXPRESSES ALTITUDE AS MEASURED OUTWARD FROM THE EARTH AS A POSITIVE QUANTITY ABOVE MEAN SEA LEVEL (MSL) IN FEET. IN 100 FT INCREMENTS.
428	003	ELEVATION ANGLE, 2 ----- 0 THROUGH 89.994507 DEGREES NO STATEMENT -89.994507 THROUGH -0.005493 DEGREES	0 THROUGH 16383 16384 16385 THROUGH 32767	EXPRESSES ANGULAR ELEVATION MEASURED FROM THE HORIZONTAL. ABOVE HORIZONTAL ANGLES ARE POSITIVE. BELOW HORIZONTAL ANGLES ARE NEGATIVE. THE ORIGIN OF THE ANGLE IS SPECIFIED BY THE LATITUDE AND LONGITUDE FIELDS IN J12.7I AND THE ANGLE ORIGIN ALTITUDE FIELD IN J12.7E0.
372	001	BEARING, INTERCEPT ----- 0 THROUGH 359 65175/65535 DEGREES NO STATEMENT	0 THROUGH 65534 65535	AZIMUTHAL BEARING TO THE THREAT REFERENCED TO TRUE NORTH. THE ORIGIN OF THE BEARING IS SPECIFIED BY THE LATITUDE AND LONGITUDE FIELDS IN THE J12.7I. IN 360/65535 DEGREE INCREMENTS.
353	011	ELEVATION UNCERTAINTY -----		PROVIDES UNCERTAINTY OF ELEVATION OF THE TARGET ELEVATION ANGLE PROVIDED IN THE J12.7E0 WORD. THE UNCERTAINTY SHALL BE CALCULATED AS ROOT-SUM-SQUARE OF THE MEAN AND STANDARD DEVIATION OF THE ELEVATION ERROR ESTIMATE. THE MEAN SHALL REFLECT ALL KNOWN BIASES SUCH AS SENSOR BORESIGHTING ERRORS. THE STANDARD DEVIATION SHALL REFLECT ERRORS DUE TO MEASUREMENT NOISE. THE STANDARD DEVIATION (SIGMA) DESCRIBES A 2 SIGMA REGION (- SIGMA TO SIGMA)

5.2-986

MIL-STD-6016B

FIELD CODING FOR J12.7E0

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

353	011	ELEVATION UNCERTAINTY	(CONTINUED)	
-----	-----	-----------------------	-------------	--

AROUND THE MEAN.

NO STATEMENT (NOT VALID)	0
GREATER THAN 5.00 DEGREES	1
GREATER THAN 3.70 DEGREES THROUGH 5.00 DEGREES	2
GREATER THAN 2.74 DEGREES THROUGH 3.70 DEGREES	3
GREATER THAN 2.03 DEGREES THROUGH 2.74 DEGREES	4
GREATER THAN 1.50 DEGREES THROUGH 2.03 DEGREES	5
GREATER THAN 1.11 DEGREES THROUGH 1.50 DEGREES	6
GREATER THAN .82 DEGREES THROUGH 1.11 DEGREES	7
GREATER THAN .61 DEGREES THROUGH .82 DEGREES	8
GREATER THAN .45 DEGREES THROUGH .61 DEGREES	9
GREATER THAN .33 DEGREES THROUGH .45 DEGREES	10
GREATER THAN .25 DEGREES THROUGH .33 DEGREES	11
GREATER THAN .18 DEGREES THROUGH .25 DEGREES	12
GREATER THAN .14 DEGREES THROUGH .18 DEGREES	13
GREATER THAN .10 DEGREES THROUGH .14 DEGREES	14
LESS THAN OR EQUAL TO .10 DEGREES	15

353	010	BEARING UNCERTAINTY		
-----	-----	---------------------	--	--

PROVIDES THE UNCERTAINTY OF
BEARING DATA. THE TARGET BEARING
PROVIDED IN THE J12.7E0 WORD
SHALL BE CALCULATED AS
ROOT-SUM-SQUARE OF THE MEAN AND

DFI DUI DUI/DI NAME DI BIT CODE DUI/DI EXPLANATION

353 010 BEARING UNCERTAINTY (CONTINUED)

STANDARD DEVIATION OF THE BEARING
ERROR ESTIMATE. THE MEAN SHALL
REFLECT ALL KNOWN BIASES SUCH AS
SENSOR BORESIGHTING ERRORS. THE
STANDARD DEVIATION SHALL REFLECT
ERRORS DUE TO MEASUREMENT NOISE.
THE STANDARD DEVIATION (SIGMA)
DESCRIBES A 2 SIGMA REGION (-SIGMA
TO SIGMA) AROUND THE MEAN.

- NO STATEMENT (NOT VALID) 0
- GREATER THAN 5.00 DEGREES 1
- GREATER THAN 3.70 DEGREES THROUGH 5.00 DEGREES 2
- GREATER THAN 2.74 DEGREES THROUGH 3.70 DEGREES 3
- GREATER THAN 2.03 DEGREES THROUGH 2.74 DEGREES 4
- GREATER THAN 1.50 DEGREES THROUGH 2.03 DEGREES 5
- GREATER THAN 1.11 DEGREES THROUGH 1.50 DEGREES 6
- GREATER THAN .82 DEGREES THROUGH 1.11 DEGREES 7
- GREATER THAN .61 DEGREES THROUGH .82 DEGREES 8
- GREATER THAN .45 DEGREES THROUGH .61 DEGREES 9
- GREATER THAN .33 DEGREES THROUGH .45 DEGREES 10
- GREATER THAN .25 DEGREES THROUGH .33 DEGREES 11
- GREATER THAN .18 DEGREES THROUGH .25 DEGREES 12
- GREATER THAN .14 DEGREES THROUGH .18 DEGREES 13
- GREATER THAN .10 DEGREES THROUGH .14 DEGREES 14

FIELD CODING FOR J12.7E0 (SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
353	010	BEARING UNCERTAINTY ----- LESS THAN OR EQUAL TO .10 DEGREES	(CONTINUED) 15	
417	001	FREQUENCY, INTERCEPT ----- NO STATEMENT UNDEFINED 1.00 THROUGH 9.99 HZ UNDEFINED	0 1 THROUGH 99 100 THROUGH 999 1000 THROUGH 1023	SPECIFIES THE SPECIFIC FREQUENCY OF AN INTERCEPT. THE VALUE OF THIS FIELD IS USED WITH THE FREQUENCY EXPONENT FIELD TO DETERMINE THE ACTUAL FREQUENCY. IN .01 HZ INCREMENTS.
1963	001	FREQUENCY EXPONENT ----- EXPONENT VALUE 0 THROUGH 15	0 THROUGH 15	EXPRESSED AS 10 TO THE NTH POWER WHERE "N" IS THE FREQUENCY EXPONENT VALUE. 10 TO THE NTH POWER IS MULTIPLIED BY THE FREQUENCY INTERCEPT FIELD TO DETERMINE THE FREQUENCY. WHEN THE FREQUENCY INTERCEPT FIELD IS SET TO VALUE 0, THIS FIELD IS NOT INTERPRETED.

.....

WORD TITLE: TARGET BEARING EXTENSION WORD 1

24:	23	22	21	20	19	18	17:	16	15	14	13	12	11:	10	09	08	07	06	05:	04	03	02:	01	00:					
<---	:	HUNDREDTHS						:	SECOND						:	MINUTE						:	TIME INDICATOR			:	WORD FORMAT		:
:	7						:	6						:	6						:	3			:	2		:	

49	48	47:	46	45	44	43	42	41	40	39	38:	37	36	35	34	33:	32	31	30	29	28	27	26	25
ELEVATION :												:BEARING ANGLE RATE :												
ANGLE RATE :												: UNCERTAINTY :												
UNCERTAINTY:												: BEARING ANGLE RATE												
5 :												9 :												
5 :												9												

:	69	68	67	66	65	64	63	62	61	60	59	58:	57	56	55:	54	53	52:	51	50	
:													:	EMITTER		:			:		
:	SPARE												:	STATUS		:	EMITTER PRF		:	--->	
:													:			:			:		
:	12												:	3		:	3		:		

5.2-990

MIL-STD-6016B

WORD DESCRIPTION

WORD NUMBER: J12.7E1

WORD TITLE: TARGET BEARING EXTENSION WORD 1

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	10
1681 004	TIME INDICATOR	2-	4 3	
797 004	MINUTE	5-	10 6	
380 001	SECOND	11-	16 6	
380 002	HUNDREDTHS	17-	23 7	
384 001	BEARING ANGLE RATE	24-	32 9	
353 012	BEARING ANGLE RATE UNCERTAINTY	33-	37 5	
384 002	ELEVATION ANGLE RATE	38-	46 9	
353 013	ELEVATION ANGLE RATE	47-	51 5	
	UNCERTAINTY (EAR UNCERT)			
440 001	EMITTER PRF	52-	54 3	
342 001	EMITTER STATUS	55-	57 3	
756 012	SPARE	58-	69 12	

FIELD CODING FOR J12.7E1

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1681	004	TIME INDICATOR -----		USED IN CONJUNCTION WITH THE MINUTE, SECOND, AND HUNDREDTHS FIELDS TO DESCRIBE THEIR USE FOR TARGETING.
		NO STATEMENT	0	
		TIME OF OBSERVATION	1	THE TIME (MINUTE, SECOND, AND HUNDREDTHS FIELDS COLLECTIVELY) REPRESENTS THE TIME AT WHICH THE TARGET WAS ACTUALLY OBSERVED BY THE REPORTING UNIT. THE TIME IS REFERENCED TO NETWORK TIME.
		TIME OF EXTRAPOLATION	2	THE TIME (MINUTE, SECOND, AND HUNDREDTHS FIELDS COLLECTIVELY) REPRESENTS THE TIME TO WHICH THE REPORTING JU LAST EXTRAPOLATED THE TARGET. THE TIME IS REFERENCED TO NETWORK TIME, AND APPLIES TO ALL PARAMETERS EXCEPT LATITUDE AND LONGITUDE WHICH ARE EXTRAPOLATED TO TIME OF TRANSMISSION.
		TRACK AGE	3	THE TIME (MINUTE, SECOND, AND HUNDREDTHS FIELDS COLLECTIVELY) REPRESENTS THE LENGTH OF TIME THAT HAS PASSED SINCE TARGET WAS LAST EXTRAPOLATED. THIS FIELD VALUE IS ONLY USED WHEN NONE OF THE TARGET DATA IS EXTRAPOLATED BY THE SENDER UP TO THE TIME OF TRANSMISSION OF THE DATA. THIS TIME IS REFERENCED TO NETWORK TIME.
		UNDEFINED GREATER THAN 1 HOUR	4 THROUGH 6 7	MORE THAN AN HOUR HAS PASSED SINCE THE TARGET WAS LAST EXTRAPOLATED. DO NOT INTERPRET THE MINUTE, SECOND, OR HUNDREDTHS FIELDS.
797	004	MINUTE -----		THE MINUTE OF THE HOUR.
		0 THROUGH 59	0 THROUGH 59	
		ILLEGAL	60 THROUGH 62	IN ONE MINUTE INCREMENTS.
		NO STATEMENT	63	
380	001	SECOND -----		THE SECOND OF THE MINUTE.
		0 THROUGH 59	0 THROUGH 59	IN ONE SECOND INCREMENTS.

5.2-992

MIL-STD-6016B

FIELD CODING FOR J12.7E1

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
380	001	SECOND ----- ILLEGAL NO STATEMENT	(CONTINUED) 60 THROUGH 62 63	
380	002	HUNDREDTHS ----- 0 THROUGH 99 HUNDREDTHS ILLEGAL NO STATEMENT	0 THROUGH 99 100 THROUGH 126 127	HUNDREDTHS OF A SECOND. IN HUNDREDTHS OF SECOND INCREMENTS.
384	001	BEARING ANGLE RATE ----- -90 THROUGH 89.6477 DEGREES PER SECOND NO STATEMENT	0 THROUGH 510 511	RATE OF CHANGE OF THE BEARING ANGLE. BEARING ANGLE RATE IS THE SUM OF THE OBSERVER AND TARGET RATES IN THE BEARING PLANE. INDICATES BEARING/ELEVATION ANGLE RATE IN .3523 DEGREES/SEC INCREMENTS.
353	012	BEARING ANGLE RATE UNCERTAINTY ----- NO STATEMENT GREATER THAN 4.6283 DEG/SEC	0 1	PROVIDES AN ESTIMATE OF TARGET BEARING ANGLE RATE UNCERTAINTY. THE UNCERTAINTY SHALL BE CALCULATED AS THE ROOT-SUM-SQUARE OF THE MEAN OF TARGET MEASUREMENT ERROR, THE STANDARD DEVIATION OF THE TARGET MEASUREMENT ERROR, THE MEAN OF THE ERROR OF THE OWNERSHIP VELOCITY CONTRIBUTION TO BEARING ANGLE RATE, AND THE STANDARD DEVIATION OF THE ERROR OF THE OWNERSHIP CONTRIBUTION TO BEARING ANGLE RATE. THE MEAN SHALL REFLECT ALL KNOWN BIASES SUCH AS SENSOR BORESIGHTING ERRORS. THE STANDARD DEVIATION SHALL REFLECT ERRORS DUE TO MEASUREMENT NOISE. THE STANDARD DEVIATION DESCRIBES A 2 SIGMA REGION AROUND THE MEAN (-SIGMA TO SIGMA).

5.2-993

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
353	012	BEARING ANGLE RATE UNCERTAINTY (CONTINUED)		

		GREATER THAN 3.7026 DEG/SEC THROUGH 4.6283 DEG/SEC	2	
		GREATER THAN 2.9621 DEG/SEC THROUGH 3.7026 DEG/SEC	3	
		GREATER THAN 2.3697 DEG/SEC THROUGH 2.9621 DEG/SEC	4	
		GREATER THAN 1.8958 DEG/SEC THROUGH 2.3697 DEG/SEC	5	
		GREATER THAN 1.5166 DEG/SEC THROUGH 1.8958 DEG/SEC	6	
		GREATER THAN 1.2133 DEG/SEC THROUGH 1.5166 DEG/SEC	7	
		GREATER THAN .9706 DEG/SEC THROUGH 1.2133 DEG/SEC	8	
		GREATER THAN .7765 DEG/SEC THROUGH .9706 DEG/SEC	9	
		GREATER THAN .6212 DEG/SEC THROUGH .7765 DEG/SEC	10	
		GREATER THAN .4970 DEG/SEC THROUGH .6212 DEG/SEC	11	
		GREATER THAN .3976 DEG/SEC THROUGH .4970 DEG/SEC	12	
		GREATER THAN .3181 DEG/SEC THROUGH .3976 DEG/SEC	13	
		GREATER THAN .2544 DEG/SEC THROUGH .3181 DEG/SEC	14	
		GREATER THAN .2036 DEG/SEC THROUGH .2544 DEG/SEC	15	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
353	012	BEARING ANGLE RATE UNCERTAINTY (CONTINUED)		

		GREATER THAN .1628	16	
		DEG/SEC THROUGH .2036		
		DEG/SEC		
		GREATER THAN .1303	17	
		DEG/SEC THROUGH .1628		
		DEG/SEC		
		GREATER THAN .1042	18	
		DEG/SEC THROUGH .1303		
		DEG/SEC		
		GREATER THAN .0834	19	
		DEG/SEC THROUGH .1042		
		DEG/SEC		
		GREATER THAN .0667	20	
		DEG/SEC THROUGH .0834		
		DEG/SEC		
		GREATER THAN .0534	21	
		DEG/SEC THROUGH .0667		
		DEG/SEC		
		GREATER THAN .0427	22	
		DEG/SEC THROUGH .0534		
		DEG/SEC		
		GREATER THAN .0342	23	
		DEG/SEC THROUGH .0427		
		DEG/SEC		
		GREATER THAN .0273	24	
		DEG/SEC THROUGH .0342		
		DEG/SEC		
		GREATER THAN .0219	25	
		DEG/SEC THROUGH .0273		
		DEG/SEC		
		GREATER THAN .0175	26	
		DEG/SEC THROUGH .0219		
		DEG/SEC		
		GREATER THAN .0140	27	
		DEG/SEC THROUGH .0175		
		DEG/SEC		
		GREATER THAN .0112	28	
		DEG/SEC THROUGH .0140		
		DEG/SEC		
		GREATER THAN .0090	29	
		DEG/SEC THROUGH .0112		
		DEG/SEC		

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
353	012	BEARING ANGLE RATE UNCERTAINTY (CONTINUED) -----		
		GREATER THAN .0072 DEG/SEC THROUGH .0090 DEG/SEC	30	
		LESS THAN OR EQUAL TO .0072 DEG/SEC	31	
384	002	ELEVATION ANGLE RATE -----		RATE OF CHANGE OF THE ELEVATION ANGLE. ELEVATION ANGLE RATE IS THE SUM OF OBSERVER AND TARGET RATES IN THE ELEVATION PLANE.
		-90 THROUGH 89.6477 DEGREES PER SECOND	0 THROUGH 510	INDICATES BEARING/ELEVATION ANGLE RATE IN .3523 DEGREES/SEC INCREMENTS.
		NO STATEMENT	511	
353	013	ELEVATION ANGLE RATE UNCERTAINTY -----		PROVIDES AN ESTIMATE OF TARGET ELEVATION ANGLE RATE UNCERTAINTY. THE UNCERTAINTY SHALL BE CALCULATED AS THE ROOT-SUM-SQUARE OF THE MEAN OF THE TARGET MEASUREMENT ERROR, THE STANDARD DEVIATION OF THE TARGET MEASUREMENT ERROR, THE MEAN OF THE ERROR OF THE OWNERSHIP VELOCITY CONTRIBUTION TO ELEVATION ANGLE RATE, AND THE STANDARD DEVIATION OF THE ERROR OF THE OWNERSHIP VELOCITY CONTRIBUTION TO ELEVATION ANGLE RATE. THE MEAN SHALL REFLECT ALL KNOWN BIASES SUCH AS SENSOR BORESIGHTING ERRORS. THE STANDARD DEVIATION SHALL REFLECT ERRORS DUE TO MEASUREMENT NOISE. THE STANDARD DEVIATION DESCRIBES A 2 SIGMA REGION AROUND THE MEAN (-SIGMA TO SIGMA).
		NO STATEMENT	0	
		GREATER THAN 4.6283 DEG/SEC	1	
		GREATER THAN 3.7026 DEG/SEC THROUGH 4.6283 DEG/SEC	2	

FIELD CODING FOR J12.7E1

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
353	013	ELEVATION ANGLE RATE UNCERTAINTY -----	(CONTINUED)	
		GREATER THAN 2.9621 DEG/SEC THROUGH 3.7026 DEG/SEC	3	
		GREATER THAN 2.3697 DEG/SEC THROUGH 2.9621 DEG/SEC	4	
		GREATER THAN 1.8958 DEG/SEC THROUGH 2.3697 DEG/SEC	5	
		GREATER THAN 1.5166 DEG/SEC THROUGH 1.8958 DEG/SEC	6	
		GREATER THAN 1.2133 DEG/SEC THROUGH 1.5166 DEG/SEC	7	
		GREATER THAN .9706 DEG/SEC THROUGH 1.2133 DEG/SEC	8	
		GREATER THAN .7765 DEG/SEC THROUGH .9706 DEG/SEC	9	
		GREATER THAN .6212 DEG/SEC THROUGH .7765 DEG/SEC	10	
		GREATER THAN .4970 DEG/SEC THROUGH .6212 DEG/SEC	11	
		GREATER THAN .3976 DEG/SEC THROUGH .4970 DEG/SEC	12	
		GREATER THAN .3181 DEG/SEC THROUGH .3976 DEG/SEC	13	
		GREATER THAN .2544 DEG/SEC THROUGH .3181 DEG/SEC	14	
		GREATER THAN .2036 DEG/SEC THROUGH .2544 DEG/SEC	15	
		GREATER THAN .1628 DEG/SEC THROUGH .2036 DEG/SEC	16	

5.2-997

MIL-STD-6016B

FIELD CODING FOR J12.7E1 (SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
353	013	ELEVATION ANGLE RATE UNCERTAINTY -----	(CONTINUED)	
		GREATER THAN .1303 DEG/SEC THROUGH .1628 DEG/SEC	17	
		GREATER THAN .1042 DEG/SEC THROUGH .1303 DEG/SEC	18	
		GREATER THAN .0834 DEG/SEC THROUGH .1042 DEG/SEC	19	
		GREATER THAN .0667 DEG/SEC THROUGH .0834 DEG/SEC	20	
		GREATER THAN .0534 DEG/SEC THROUGH .0667 DEG/SEC	21	
		GREATER THAN .0427 DEG/SEC THROUGH .0534 DEG/SEC	22	
		GREATER THAN .0342 DEG/SEC THROUGH .0427 DEG/SEC	23	
		GREATER THAN .0273 DEG/SEC THROUGH .0342 DEG/SEC	24	
		GREATER THAN .0219 DEG/SEC THROUGH .0273 DEG/SEC	25	
		GREATER THAN .0175 DEG/SEC THROUGH .0219 DEG/SEC	26	
		GREATER THAN .0140 DEG/SEC THROUGH .0175 DEG/SEC	27	
		GREATER THAN .0112 DEG/SEC THROUGH .0140 DEG/SEC	28	
		GREATER THAN .0090 DEG/SEC THROUGH .0112 DEG/SEC	29	
		GREATER THAN .0072 DEG/SEC THROUGH .0090 DEG/SEC	30	

FIELD CODING FOR J12.7E1

(SHEET 8)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
353	013	ELEVATION ANGLE RATE UNCERTAINTY ----- LESS THAN OR EQUAL TO .0072 DEG/SEC	(CONTINUED) 31	
440	001	EMITTER PRF ----- NO STATEMENT LOW (>0 <4 KHZ) MEDIUM (>=4 <20 KHZ) HIGH (>=20 <300 KHZ) MISSILE COMPATIBLE (>=300 KHZ) UNDEFINED	0 1 2 3 4 5 THROUGH 7	DEFINES THE PULSE REPETITION FREQUENCY OF THE TARGET EMITTER.
342	001	EMITTER STATUS ----- NO STATEMENT INACTIVE TARGET EMITTER ACTIVE TARGET EMITTER IN SEARCH TARGET EMITTER IN TRACK MISSILE LAUNCH UNDEFINED	0 1 2 3 4 5 6 THROUGH 7	REPORTS THE STATUS OF THE TARGET'S EMITTER. TARGET'S EMITTER IS INACTIVE OR NOT DETECTED. TARGET'S EMITTER IS ACTIVE. MODE NOT SPECIFIED. TARGET EMITTER IN SEARCH MODE. TARGET EMITTER IN TRACKING MODE. TARGET HAS LAUNCHED A MISSILE.

.....

WORD TITLE: TARGET BEARING CONTINUATION WORD 1

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
			:	RANGE RATE				:											:	:	RANGE			
<---			:	UNCERTAINTY				:	RANGE RATE										:	SP	:	UNCERTA		
			:					:											:	:	INTY			
			:	5				:	13										:	1	:	4		

:	69	68	67	66	65	64	63	62	61	60	59	58:	57	56	55	54	53	52	51	50	
:													:								
:	OBSERVER VELOCITY EAST												:	OBSERVER VELOCITY NORTH							
:													:								
:	12												:	12							

WORD DESCRIPTION

WORD NUMBER: J12.7C1

WORD TITLE: TARGET BEARING CONTINUATION WORD 1

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	00001
757 001	RANGE, 1	7-	22 16	
353 014	RANGE UNCERTAINTY	23-	26 4	
756 001	SPARE (SP)	27	1	
384 003	RANGE RATE	28-	40 13	
353 015	RANGE RATE UNCERTAINTY	41-	45 5	
1401 001	OBSERVER VELOCITY NORTH	46-	57 12	
1401 002	OBSERVER VELOCITY EAST	58-	69 12	

FIELD CODING FOR J12.7C1 (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
757	001	RANGE, 1 ----- 0 THROUGH 983,010 FT NO STATEMENT	0 THROUGH 65534 65535	THE RANGE OF THE CONTACT FROM THE DETECTING SENSOR. IN 15 FOOT INCREMENTS
353	014	RANGE UNCERTAINTY -----		PROVIDES AN ESTIMATE OF TARGET POSITION UNCERTAINTY ALONG THE MEASUREMENT AXIS DEFINED ALONG THE LINE BETWEEN THE OBSERVER POSITION AND THE TARGET POSITION. THE UNCERTAINTY SHALL BE CALCULATED AS THE ROOT-SUM-SQUARE OF THE MEAN OF TARGET MEASUREMENT ERROR, THE STANDARD DEVIATION OF THE TARGET MEASUREMENT ERROR, THE MEAN OF THE OBSERVER POSITION ERROR, AND THE STANDARD DEVIATION OF THE OBSERVER POSITION ERROR ALONG THIS AXIS. THE MEAN SHALL REFLECT ALL KNOWN BIASES SUCH AS SENSOR BORESIGHTING ERRORS. THE STANDARD DEVIATION SHALL REFLECT ERRORS DUE TO MEASUREMENT NOISE. THE STANDARD DEVIATION DESCRIBES A 2 SIGMA REGION AROUND THE MEAN (-SIGMA TO SIGMA). THE MEASUREMENT AXES ALONG WHICH SLANT RANGE POSITION UNCERTAINTY, CROSS RANGE POSITION UNCERTAINTY AND VERTICAL POSITION UNCERTAINTY ARE DEFINED ARE MUTUALLY ORTHOGONAL.
		NO STATEMENT	0	
		GREATER THAN 25000 FT	1	
		GREATER THAN 15712 THROUGH 25000 FT	2	
		GREATER THAN 9882 THROUGH 15712 FT	3	
		GREATER THAN 6214 THROUGH 9882 FT	4	
		GREATER THAN 3907 THROUGH 6214 FT	5	
		GREATER THAN 2456 THROUGH 3907 FT	6	

FIELD CODING FOR J12.7C1 (SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
353	014	RANGE UNCERTAINTY -----	(CONTINUED)	
		GREATER THAN 1544 THROUGH 2456 FT	7	
		GREATER THAN 971 THROUGH 1544 FT	8	
		GREATER THAN 611 THROUGH 971 FT	9	
		GREATER THAN 384 THROUGH 611 FT	10	
		GREATER THAN 241 THROUGH 384 FT	11	
		GREATER THAN 152 THROUGH 241 FT	12	
		GREATER THAN 95 THROUGH 152 FT	13	
		GREATER THAN 60 THROUGH 95 FT	14	
		LESS THAN OR EQUAL TO 60 FT	15	
384	003	RANGE RATE -----		RATE OF CHANGE OF THE RANGE. RANGE RATE IS THE SUM OF OBSERVER AND TARGET RATES ALONG THE LINE-OF-SIGHT BETWEEN THE OBSERVER AND THE TARGET. IN ONE FOOT/SEC INCREMENTS.
		0 THROUGH 4095 FT/SEC NO STATEMENT	0 THROUGH 4095 4096	
		-4095 FT/SEC THROUGH -1 FT/SEC	4097 THROUGH 8191	
353	015	RANGE RATE UNCERTAINTY -----		PROVIDES AN ESTIMATE OF THE TARGET RANGE RATE UNCERTAINTY ALONG THE MEASUREMENT AXIS. THE UNCERTAINTY SHALL BE CALCULATED AS THE ROOT-SUM-SQUARE OF THE MEAN OF TARGET MEASUREMENT ERROR, THE MEAN OF THE OBSERVER'S OWN VELOCITY COMPONENT ERROR, AND THE STANDARD DEVIATION OF THE OBSERVER'S OWN VELOCITY COMPONENT ERROR ALONG THIS AXIS. THE STANDARD DEVIATION SHALL REFLECT ERRORS DUE TO MEASUREMENT NOISE. THE STANDARD DEVIATION DESCRIBES

5.2-1003

MIL-STD-6016B

FIELD CODING FOR J12.7C1

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

353	015	RANGE RATE UNCERTAINTY	(CONTINUED)	
-----	-----	------------------------	-------------	--

A 2 SIGMA REGION AROUND THE MEAN
(-SIGMA TO SIGMA).

NO STATEMENT	0
GREATER THAN 660 FT/SEC	1
GREATER THAN 527.62	2
FT/SEC THROUGH 660	
FT/SEC	
GREATER THAN 421.79	3
FT/SEC THROUGH 527.62	
FT/SEC	
GREATER THAN 337.18	4
FT/SEC THROUGH 421.79	
FT/SEC	
GREATER THAN 269.55	5
FT/SEC THROUGH 337.18	
FT/SEC	
GREATER THAN 215.48	6
FT/SEC THROUGH 269.55	
FT/SEC	
GREATER THAN 172.26	7
FT/SEC THROUGH 215.48	
FT/SEC	
GREATER THAN 137.21	8
FT/SEC THROUGH 172.26	
FT/SEC	
GREATER THAN 110.09	9
FT/SEC THROUGH 137.21	
FT/SEC	
GREATER THAN 88.01	10
FT/SEC THROUGH 110.09	
FT/SEC	
GREATER THAN 70.35	11
FT/SEC THROUGH 88.01	
FT/SEC	
GREATER THAN 56.24	12
FT/SEC THROUGH 70.35	
FT/SEC	
GREATER THAN 44.96	13
FT/SEC THROUGH 56.24	
FT/SEC	
GREATER THAN 35.94	14
FT/SEC THROUGH 44.96	
FT/SEC	

5.2-1004

MIL-STD-6016B

FIELD CODING FOR J12.7C1

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

353	015	RANGE RATE UNCERTAINTY	(CONTINUED)	
-----	-----	------------------------	-------------	--

		GREATER THAN 28.73	15
		FT/SEC THROUGH 35.94	
		FT/SEC	
		GREATER THAN 22.97	16
		FT/SEC THROUGH 28.73	
		FT/SEC	
		GREATER THAN 18.36	17
		FT/SEC THROUGH 22.97	
		FT/SEC	
		GREATER THAN 14.68	18
		FT/SEC THROUGH 18.36	
		FT/SEC	
		GREATER THAN 11.73	19
		FT/SEC THROUGH 14.68	
		FT/SEC	
		GREATER THAN 9.38 FT/SEC	20
		THROUGH 11.73 FT/SEC	
		GREATER THAN 7.5 FT/SEC	21
		THROUGH 9.38 FT/SEC	
		GREATER THAN 6.0 FT/SEC	22
		THROUGH 7.5 FT/SEC	
		GREATER THAN 4.79 FT/SEC	23
		THROUGH 6.0 FT/SEC	
		GREATER THAN 3.83 FT/SEC	24
		THROUGH 4.79 FT/SEC	
		GREATER THAN 3.06 FT/SEC	25
		THROUGH 3.83 FT/SEC	
		GREATER THAN 2.45 FT/SEC	26
		THROUGH 3.06 FT/SEC	
		GREATER THAN 1.96 FT/SEC	27
		THROUGH 2.45 FT/SEC	
		GREATER THAN 1.56 FT/SEC	28
		THROUGH 1.96 FT/SEC	
		GREATER THAN 1.25 FT/SEC	29
		THROUGH 1.56 FT/SEC	
		GREATER THAN 1 FT/SEC	30
		THROUGH 1.25 FT/SEC	
		LESS THAN OR EQUAL TO	31
		1 FT/SEC	

1401	001	OBSERVER VELOCITY NORTH	
------	-----	-------------------------	--

PROVIDES THE TARGET OBSERVER'S
VELOCITY ALONG THE LOCAL NORTH
AXIS, DEFINED AT THE LATITUDE AND

5.2-1005

MIL-STD-6016B

FIELD CODING FOR J12.7C1 (SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1401	001	OBSERVER VELOCITY NORTH -----	(CONTINUED)	
		0 THROUGH 2047 FEET PER SECOND	0 THROUGH 2047	LONGITUDE IN THE J12.7I WORD. IN 1 FT/SEC INCREMENTS.
		NO STATEMENT	2048	
		-2047 THROUGH -1 FEET PER SECOND	2049 THROUGH 4095	IN 1 FT/SEC INCREMENTS.
1401	002	OBSERVER VELOCITY EAST -----		PROVIDES THE TARGET OBSERVER'S VELOCITY ALONG THE LOCAL EAST AXIS, DEFINED AT THE LATITUDE AND LONGITUDE IN THE J12.7I WORD. IN 1 FT/SEC INCREMENTS.
		0 THROUGH 2047 FEET PER SECOND	0 THROUGH 2047	
		NO STATEMENT	2048	
		-2047 THROUGH -1 FEET PER SECOND	2049 THROUGH 4095	IN 1 FT/SEC INCREMENTS.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: TARGET BEARING CONTINUATION WORD 2

:	24	23	22	21	20	19	18	17	16:	15	14	13	12	11	10	09	08	07:	06	05	04	03	02:	01	00:				
:	PROBABILITY OF ENEMY FORCES									:	PROBABILITY OF OWN FORCES									:	CONTINUATION WORD LABEL					:	WORD FORMAT		:
:										:										:						:			:
:	9									:	9									:	5					:	2		:

49:	48	47	46	45	44	43	42	41	40	39	38	37:	36	35	34	33	32	31	30	29	28	27	26	25:
:	SPACE AMBIGUOUS TYPE 2											:	SPACE AMBIGUOUS TYPE 1											:
:	AIR AMBIGUOUS TYPE 2											:	AIR AMBIGUOUS TYPE 1											:
:	SURFACE (MARITIME) AMBIGUOUS TYPE 2											:	SURFACE (MARITIME) AMBIGUOUS TYPE 1											:
<---	SUBSURFACE (MARITIME) AMBIGUOUS TYPE 2											:	SUBSURFACE (MARITIME) AMBIGUOUS TYPE 1											:
:	LAND (GROUND) AMBIGUOUS TYPE 2											:	LAND (GROUND) AMBIGUOUS TYPE 1											:
:	SPARE											:	SPARE											:
:	12											:	12											:

:	69	68	67:	66	65	64	63	62	61	60	59	58:	57	56	55	54	53	52	51	50		
:	ENV/CAT			:	AMBIGUOUS TYPE 2 PROBABILITY									:	AMBIGUOUS TYPE 1 PROBABILITY							
:				:										:								
:	3			:	9									:	9							

WORD DESCRIPTION

WORD NUMBER: J12.7C2

WORD TITLE: TARGET BEARING CONTINUATION WORD 2

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	01
1551	001	CONTINUATION WORD LABEL	2-	6 5	00010
369	001	PROBABILITY OF OWN FORCES	7-	15 9	
369	002	PROBABILITY OF ENEMY FORCES	16-	24 9	
749	001	SPACE AMBIGUOUS TYPE 1	25-	36 12	
804	002	AIR AMBIGUOUS TYPE 1	25-	36 12	
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	25-	36 12	
809	002	SUBSURFACE (MARITIME) AMBIGUOUS TYPE 1	25-	36 12	
810	002	LAND (GROUND) AMBIGUOUS TYPE 1	25-	36 12	
756	012	SPARE	25-	36 12	
749	003	SPACE AMBIGUOUS TYPE 2	37-	48 12	
804	003	AIR AMBIGUOUS TYPE 2	37-	48 12	
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	37-	48 12	
809	003	SUBSURFACE (MARITIME) AMBIGUOUS TYPE 2	37-	48 12	
810	003	LAND (GROUND) AMBIGUOUS TYPE 2	37-	48 12	
756	012	SPARE	37-	48 12	
369	003	AMBIGUOUS TYPE 1 PROBABILITY	49-	57 9	
369	004	AMBIGUOUS TYPE 2 PROBABILITY	58-	66 9	
275	004	ENVIRONMENT/CATEGORY (ENV/CAT)	67-	69 3	

FIELD CODING FOR J12.7C2 (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
369	001	PROBABILITY OF OWN FORCES ----- 0 THROUGH 1 NO STATEMENT	0 THROUGH 510 511	EXPRESSES THE PROBABILITY THAT THE TARGET BELONGS TO OWN FORCES. THE PROBABILITY SHALL REFLECT BOTH THE CONFIDENCE IN THE IDENTIFICATION SOURCES AND THE CONFIDENCE THAT THE IDENTITY INFORMATION IS CORRECTLY CORRELATED TO THIS TARGET. INFORMATION IN THIS FIELD SHALL BE DERIVED ONLY FROM ONBOARD SOURCES AS OPPOSED TO DATA LINK SOURCES. 100 - (PROBABILITY OF OWN FORCES + PROBABILITY OF ENEMY FORCES) = PROBABILITY OF NONALIGNED FORCES. IN 0.00196 INCREMENTS.
369	002	PROBABILITY OF ENEMY FORCES ----- 0 THROUGH 1 NO STATEMENT	0 THROUGH 510 511	EXPRESSES THE PROBABILITY THAT THE TARGET BELONGS TO ENEMY FORCES. THE PROBABILITY SHALL REFLECT BOTH THE CONFIDENCE IN THE IDENTIFICATION SOURCES AND THE CONFIDENCE THAT THE IDENTITY INFORMATION IS CORRECTLY CORRELATED TO THIS TARGET. INFORMATION IN THIS FIELD SHALL BE DERIVED ONLY FROM ONBOARD SOURCES AS OPPOSED TO DATA LINK SOURCES. 100 - (PROBABILITY OF OWN FORCES + PROBABILITY OF ENEMY FORCES) = PROBABILITY OF NONALIGNED FORCES. IN 0.00196 INCREMENTS.
749	001	SPACE AMBIGUOUS TYPE 1 -----		IDENTIFIES THE TARGET SPECIFIC TYPE AS DETERMINED BY AN ONBOARD CORRELATION PROCESS IF THERE ARE NO AMBIGUITIES. IDENTIFIES THE MOST PROBABLE TARGET SPECIFIC TYPE IF AN ONBOARD CORRELATION PROCESS DETERMINES THAT THE SPECIFIC TYPE IS AMBIGUOUS. INFORMATION IN THIS FIELD SHALL

5.2-1010

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
749	001	SPACE AMBIGUOUS TYPE 1 -----	(CONTINUED)	

BE DERIVED ONLY FROM ONBOARD
SOURCES AS OPPOSED TO DATA LINK
SOURCES.

NO STATEMENT	0
FROG-7	1
HONEST JOHN	2
SAKR 80	3
SS-21 MOD 2	4
SS-21 MOD 3	5
HAFT-I	6
UNDEFINED	7 THROUGH 78
SHORT RANGE (0-65 DM)	79
ALACRAN	80
CHENG FENG	81
CONDOR	82
HAFT II	83
IRAN-130	84
LANCE	85
MB/EE-150	86
MB/EE-300	87
UNDEFINED	88
PRITHVI	89
SS-1B (SCUD-A)	90
SS-1C (SCUD-B)	91
SS-21 (SCARAB)	92
SS-300	93
B-610/CJS-98 (BG510)	94
NHK-I	95
NHK-II (HYON MU)	96
UNDEFINED	97 THROUGH 168
SHORT-MEDIUM RANGE (66-200 DM)	169
AL-HUSAYN	170
UNDEFINED	171
HAFT III	172
M-9	173
M-11	174
MB/EE-600	175
SCUD-C	176
SS-23 (SPIDER)	177
AL HUSSEIN	178
UNDEFINED	179 THROUGH 242

5.2-1011

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
749	001	SPACE AMBIGUOUS TYPE 1	(CONTINUED)	

		MEDIUM RANGE (201-400 DM)	243	
		AL-ABBAS	244	
		JERICH0-I	245	
		AL HIJARAN	246	
		SONDA IV	247	
		UNDEFINED	248 THROUGH 330	
		MEDIUM-EXTENDED RANGE (401-600 DM)	331	
		AL-FATAH	332	
		BADR-2000	333	
		CONDOR II	334	
		CSS-1	335	
		MB/EE-1000	336	
		SKY HORSE	337	
		SS-12A (SCALEBOARD A)	338	
		SS-12B (SCALEBOARD B)	339	
		SS1000	340	
		TIEN MA	341	
		UNDEFINED	342 THROUGH 416	
		EXTENDED RANGE (601-800 DM)	417	
		ARNISTON	418	
		CAPRICORNIO	419	
		JERICH0 II	420	
		NODONG-1	421	
		SS-N-5 (SERB)	422	
		UNDEFINED	423 THROUGH 496	
		EXTENDED-LONG RANGE (801-1000 DM)	497	
		AGNI	498	
		AL/ABED	499	
		CC-4 (SANDAL)	500	
		CSS-5	501	
		UNDEFINED	502 THROUGH 575	
		LONG RANGE (1001-1350 DM)	576	
		CHEVALINE	577	
		CSS-2	578	
		CSS-3	579	
		CSS-4	580	
		CSS-N-3	581	
		M-4 SLBM	582	

5.2-1012

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
749	001	SPACE AMBIGUOUS TYPE 1 -----	(CONTINUED)	
		M-5 SLBM	583	
		M-20 SLBM	584	
		MIDGETMAN	585	
		MINUTEMAN I	586	
		MINUTEMAN II	587	
		PEACEKEEPER	588	
		POLARIS A-3	589	
		POSEIDON C-3	590	
		SS-11 (SEGO)	591	
		SS-13 (SAVAGE)	592	
		SS-17 (SPANKER) MOD 1	593	
		SS-17 (SPANKER) MOD 2	594	
		SS-17 (SPANKER) MOD 3	595	
		SS-18 (SATAN) MOD 1	596	
		SS-18 (SATAN) MOD 2	597	
		SS-18 (SATAN) MOD 3	598	
		SS-20 (SABER)	599	
		SS-24 (SCALPEL)	600	
		SS-25 (SICKLE)	601	
		SS-N-6 (SAWFLY)	602	
		SS-N-8	603	
		SS-N-17 (SNIPE)	604	
		SS-N-18 (STINGRAY)	605	
		SS-N-20 (STURGEON)	606	
		SS-N-23 (SKIFF)	607	
		SSBS S-3	608	
		SSBS S-4	609	
		TRIDENT I (C-4)	610	
		TRIDENT II (D-5)	611	
		MODIFIED CSS-5	612	
		SS-19 MOD 3	613	
		UNDEFINED	614	
		NEW SOLID SLBM	615	
		CSS-NX-3	616	
		M4B	617	
		M45	618	
		UNDEFINED	619 THROUGH 786	
		>1350 DM	787	
		ABM-1B (GALOSH)	788	
		ARROW	789	
		ASTER	790	
		CORPS SAM	791	
		ERINT	792	

5.2-1013

MIL-STD-6016B

DFI DUI DUI/DI NAME DI BIT CODE DUI/DI EXPLANATION

749	001	SPACE AMBIGUOUS TYPE 1	(CONTINUED)

		HAWK	793
		PATRIOT	794
		SA-10 (GRUMBLE)	795
		SA-12A (GLADIATOR)	796
		SA-12B (GIANT)	797
		SA-N-6 (GRUMBLE)	798
		SH-08 (GAZELLE)	799
		STANDARD MISSILE BLOCK	800
		IVA	
		THAAD	801
		SM-2 BLOCK IV	802
		SM-3 LEAP	803
		UNDEFINED	804 THROUGH 876
		INTERCEPTOR	877
		OPERATIONAL COMMANDER	878 THROUGH 941
		DEFINED 1-64	
		UNDEFINED	942 THROUGH 1022
		BALLISTIC MISSILE	1023
		GENERAL	
		UNDEFINED	1024 THROUGH 2046
		SPACE GENERAL	2047
		UNDEFINED	2048 THROUGH 4093
		RESET TO NO STATEMENT	4094
		UNDEFINED	4095

804	002	AIR AMBIGUOUS TYPE 1	IDENTIFIES THE TARGET SPECIFIC
		-----	TYPE AS DETERMINED BY AN ONBOARD
			CORRELATION PROCESS IF THERE ARE
			NO AMBIGUITIES. IDENTIFIES THE
			MOST PROBABLE TARGET SPECIFIC
			TYPE IF AN ONBOARD CORRELATION
			PROCESS DETERMINED THAT THE
			SPECIFIC TYPE IS AMBIGUOUS.
			INFORMATION IN THIS FIELD SHALL
			BE DERIVED ONLY FROM ONBOARD
			SOURCES AS OPPOSED TO DATA LINK
			SOURCES.
		NO STATEMENT	0

		FIGHTER	

FIELD CODING FOR J12.7C2

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1	(CONTINUED)	

		F-4 PHANTOM II	1	
		F-5 TIGER II	2	
		F-8 CRUSADER	3	
		F-14 TOMCAT	4	
		F-15 EAGLE	5	
		F-16 FIGHTING FALCON	6	
		F-101 VOODOO	7	
		F-104 STARFIGHTER	8	
		F-105 THUNDERCHIEF	9	
		F-106 DELTA DART	10	
		F-111 (GENERAL DYNAMICS)	11	
		F/A-18 HORNET	12	
		EFA	13	
		F-102	14	
		F-100	15	
		DISUSED	16	
		DISUSED	17	
		COMMANDO	18	
		DISUSED	19	
		DISUSED	20	
		J-35 DRAKEN	21	
		JAGUAR	22	
		SUPER ETENDARD	23	
		DISUSED	24	THROUGH 26
		F-1 (MITSUBISHI)	27	
		F-35XD DRAKEN	28	
		DISUSED	29	
		HF-24 MARUT (WIND SPIRIT)	30	
		JA37 VIGGEN	31	
		DISUSED	32	
		SF-5 FREEDOM FIGHTER	33	
		IAR-91 ORAO	34	
		AJEET INVINCIBLE	35	
		KFIR C2	36	
		MIRAGE F1	37	
		MIRAGE 3	38	
		MIRAGE 5	39	
		MIRAGE 50	40	
		MIRAGE 2000	41	
		DISUSED	42	
		DISUSED	43	
		ALPHA JET	44	

5.2-1015

MIL-STD-6016B

FIELD CODING FOR J12.7C2 (SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1 -----	(CONTINUED)	
		KEFIR	45	
		F-6 FARMER	46	
		F-8 FISHBED	47	
		F-9 FANTAN	48	
		F-12 (CHINA)	49	
		SU-7 FITTER	50	
		SU-9 FISHPOT	51	
		SU-11 FLAGON	52	
		SU-15 FLAGON	53	
		SU-17 FITTER	54	
		SU-19 FENCER	55	
		SU-20 FITTER	56	
		SU-22 FITTER	57	
		SU-24 FENCER	58	
		SU-25 FROGFOOT	59	
		TU-28 FIDDLER	60	
		TU-128 FIDDLER	61	
		MIG-21 FISHBED	62	
		MIG-23 FLOGGER	63	
		MIG-25 FOXBAT	64	
		MIG-27 FLOGGER	65	
		YAK-28 FIREBAR	66	
		YAK-36 FORGER	67	
		AAF "RAM-J"	68	
		MIG-15 FAGOT	69	
		MIG-17 FRESCO	70	
		MIG-19 FARMER	71	
		SU-27 FLANKER	72	
		MIG-29 FULCRUM	73	
		MIG-31 FOXHOUND	74	
		YAK-38 FORGER-A	75	
		F-22 RAPTOR	76	
		F-84 THUNDERSTREAK	77	
		F-86 SABRE	78	
		F/A2 SEA HARRIER	79	
		IDF CHING-KUO (TAIWAN)	80	
		JAS-39 GRIPPEN	81	
		JIAN JI-7	82	
		JIAN JI-8-2	83	
		JOINT STRIKE FIGHTER	84	
		KFIR C7	85	
		KFIR 2000	86	
		RAFALE	87	

FIELD CODING FOR J12.7C2

(SHEET 8)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1	(CONTINUED)	

		SU-30	88	
		SU-33 (SU-27K)	89	
		SU-34	90	
		SU-35	91	
		SU-37	92	
		SU-39	93	
		YAK-141 FREESTYLE	94	
		F-5 FRESCO	95	
		F-7 FISHBED	96	
		J-9	97	
		RT33	98	
		CF-188 HORNET	99	
		UNDEFINED	100	
		TORNADO F3	101	
		SEA HARRIER	102	
		F-5 NORTHROP	103	
		UNDEFINED	104 THROUGH 254	
		FIGHTER GENERAL	255	

		BOMBERS/ATTACK		

		A-4 SKYHAWK	256	
		A-6 INTRUDER	257	
		A-7 CORSAIR II	258	
		A-10 THUNDERBOLT II	259	
		A-37 DRAGONFLY	260	
		B-1 (ROCKWELL)	261	
		B-52 STRATOFORTRESS	262	
		AC-130 HERCULES	263	
		AV-8 HARRIER	264	
		F/A-18 HORNET	265	
		FB-111 (GENERAL DYNAMICS)	266	
		A-1	267	
		TA-28	268	
		DISUSED	269	
		AC-47	270	
		AC-119	271	
		AC-124	272	
		ALPHA JET	273	
		DISUSED	274 THROUGH 276	

5.2-1017

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 9)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1	(CONTINUED)	

		35XD DRAGEN	277	
		J-1 HAWK	278	
		J-1 JAESTREB	279	
		S-2	280	
		AJ37 VIGGEN	281	
		HA220 SUPER SAETA	282	
		M.B.326 (AERMACCHI)	283	
		M.B.339 (AERMACCHI)	284	
		SF 260 WARRIER	285	
		SK 60 (SAAB)	286	
		BAC 167 STRIKEMASTER	287	
		TORNADO GR-1 (IDS)	288	
		IL-28 BEAGLE	289	
		MI-4 BISON	290	
		TU-16 BADGER	291	
		TU-22 BLINDER	292	
		TU-22M BACKFIRE	293	
		TU-95 BEAR	294	
		TU-142 BEAR	295	
		YAK-28 BREWER	296	
		SUPER ENTENDARD	297	
		TU-160 BLACKJACK	298	
		AMX	299	
		FRS1 SEA HARRIER	300	
		FRS2 SEA HARRIER	301	
		FRS51 SEA HARRIER	302	
		F-117 NIGHTHAWK	303	
		G4 SUPER GALEB	304	
		G91Y	305	
		HAWK-2000	306	
		HAWK-100	307	
		HAWK-200	308	
		HAWK-50	309	
		HAWK-60	310	
		IA-58 PUCARA	311	
		IAR-93 ORAO	312	
		IAR-99 SOIM	313	
		JIAN JI-5M	314	
		A-5 FANTAN	315	
		L59 ALBATROS	316	
		B-2 SPIRIT	317	
		B-7 HONGZHA	318	
		1050E	319	

5.2-1018

MIL-STD-6016B

FIELD CODING FOR J12.7C2 (SHEET 10)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1	(CONTINUED)	

		A3 LEI MING	320	
		HARRIER GR4/7	321	
		TORNADO GR4	322	
		AV-8B HARRIER PLUS	323	
		CF-188 HORNET	324	
		RAFALE	325	
		UNDEFINED	326 THROUGH 510	
		BOMBER/ATTACK GENERAL	511	

		PATROL/RECON/ELECTRONIC/ TANKER/GENERAL		

		E-2 HAWKEYE	512	
		E-3 SENTRY (AWACS)	513	
		E-4 NEACP	514	
		EA-3	515	
		EA-6 PROWLER	516	
		EB-57 (DOUGLAS)	517	
		EC-130 HERCULES	518	
		EC-135 (BOEING)	519	
		EF-4 WILD WEASEL	520	
		EF-111 (GENERAL DYNAMICS)	521	
		EP-3 ORION	522	
		KA-3 (DOUGLAS)	523	
		KA-6 (GRUMMAN)	524	
		KC-10 EXTENDER	525	
		KC-130 HERCULES	526	
		KC-135 STRATOTANKER	527	
		O-1 BIRD DOG	528	
		O-2 (CESSNA)	529	
		OV-1 MOHAWK	530	
		OV-10 BRONCO	531	
		P-2 NEPTUNE	532	
		P-3 ORION	533	
		RC-130 HERCULES	534	
		RC-135 (BOEING)	535	
		RF-4 PHANTOM II	536	
		RF-5 (NORTHROP)	537	
		RF-8 CRUSADER	538	
		RF-14 TOMCAT	539	

FIELD CODING FOR J12.7C2

(SHEET 11)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1	(CONTINUED)	

		RF-104 STARFIGHTER	540	
		RP-3 ORION	541	
		RU-21 UTE	542	
		S-2 TRACKER	543	
		S-3 VIKING	544	
		SR-71 BLACKBIRD	545	
		U-2 (LOCKHEED)	546	
		U-4 AERO COMMANDER	547	
		U-5 H-500 TWIN	548	
		U-8 SEMINOLE	549	
		U-10 COURIER	550	
		UC-12 HURON	551	
		U-21 UTE	552	
		US-3 VIKING	553	
		OA-37 DRAGONFLY	554	
		TR-1	555	
		WC-130 HERCULES	556	
		E-1 TRACER	557	
		EB-66	558	
		EC-121	559	
		RA-3	560	
		SEA SCAN	561	
		FALCON 20 GUARDIAN	562	
		BR 1150 ATL1	563	
		RF-35XD DRAKEN	564	
		BN-2 MARITIME DEFENDER	565	
		DISUSED	566 THROUGH 567	
		CP-140 AURORA	568	
		HS.748 COASTGUARDER	569	
		HS.801 NIMROD	570	
		DISUSED	571	
		MK.3	572	
		RJ-1 HAWK	573	
		RJ-1 JAESTREB	574	
		SS-2	575	
		PEACE SENTINEL	576	
		KC-97	577	
		AU-24	578	
		AU-23	579	
		U-21	580	
		U-17	581	
		HU-16	582	
		U-9	583	

FIELD CODING FOR J12.7C2

(SHEET 12)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1	(CONTINUED)	

		U-3	584	
		RU-21	585	
		NKC-135	586	
		RF-101	587	
		RF-111	588	
		RB-57	589	
		RB-66	590	
		RC-121	591	
		BE-12 MAIL	592	
		IL-38 MAY	593	
		TU-126 MOSS	594	
		BE-6	595	
		VC-10 (TANKER)	596	
		AN-12 CUB-A (ELINT)	597	
		AN-12 CUB-C (EA)	598	
		AN-12 CUB-D (EA)	599	
		IL-20 COOT-A (ELINT)	600	
		IL-76 MAINSTAY	601	
		E-8 (J STARS)	602	
		TORNADO ECR	603	
		E-6 MERCURY	604	
		EMB-111	605	
		MU-2S	606	
		A40 ALBATROS	607	
		BE42 ALBATROS	608	
		CL215 AMPHIBIAN	609	
		IAI 1125	610	
		IL22 COOT B	611	
		J32 LANSEN	612	
		SH5 HARBIN	613	
		TIER1	614	
		TIER2	615	
		TIER3	616	
		US1 (SHIN)	617	
		C-212 CASA	618	
		CESSNA 550 CITATION II	619	
		CESSNA 560 CITATION V	620	
		CL 215 CANADAIR	621	
		DORNIER 27	622	
		F-27 FOKKER	623	
		NIMROD MRA4	624	
		CP-140A AURORA/ARCTURUS	625	
		RC-135 RIVET JOINT	626	

FIELD CODING FOR J12.7C2

(SHEET 13)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1	(CONTINUED)	

		ATL 2	627	
		ETENDARD IV P	628	
		ALIZE	629	
		FALCON 50	630	
		MIRAGE IV	631	
		MIRAGE 2000	632	
		BR 1150 GE ATL ASW	633	
		BR 1150 GE ATL SIGINT	634	
		C-130 HERCULES TANKER	635	
		ASTOR	636	
		UNDEFINED	637 THROUGH 761	
		TANKER	762	
		RECONNAISSANCE (RECON)	763	
		ELECTRONIC WARFARE (EW)	764	
		ASW	765	
		AEW AND C	766	
		MISCELLANEOUS GENERAL	767	

		TRAINER		

		T-2 BUCKEYE	768	
		T-28 TROJAN	769	
		T-29 (CONVAIR)	770	
		T-34 MENTOR	771	
		T-37 TWEET	772	
		T-38 TALON	773	
		T-39 SABERLINER	774	
		T-41 MESCALERO	775	
		T-42 CONCHISE	776	
		T-43 (BOEING)	777	
		T-44 KING AIR	778	
		TA-4 SKYHAWK	779	
		TA-7 CORSAIR II	780	
		T-33	781	
		ALPHA JET	782	
		B3LA (SAAB)	783	
		C-101 AVIOJET	784	
		G2-A GALEB	785	
		G2-A SEAGULL	786	
		L-29 DELFIN	787	
		L-29 MAYA	788	

5.2-1022

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 14)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1	(CONTINUED)	

		L-39 ALBATROS	789	
		L-70 MILTRAINER	790	
		L-450	791	
		P.55 (PARTENAVIA)	792	
		T-2 (MITSUBISHI)	793	
		CM 170 MAGISTER	794	
		M.B.339 (AERMACCHI)	795	
		T-2 (MITSUBISHI)	796	
		CM AU/ MAGISTER	797	
		M.B.339 (AERMACCHI)	798	
		SF-260 (SIAI-MARCHETTI)	799	
		SH 37 VIGGEN	800	
		QH-50 DRAKEN	801	
		SK 37 VIGGEN	802	
		SK 60 (SAAB)	803	
		TB30 EPSILON	804	
		TF-35XD	805	
		TJ-1 HAWK	806	
		TJ-1 JASTRAEB	807	
		TS.11 SPARK	808	
		AW1-2 FAN TRAINER	809	
		DISUSED	810	
		HJT-16 KIRAN	811	
		MBB223 FLAMINGO	812	
		SU-11 MAIDEN	813	
		SU-15	814	
		MIG-15 MIDGET	815	
		MIG-17	816	
		MIG-21 MONGOL	817	
		MIG-23	818	
		MIG-25	819	
		YAK-11 MOOSE	820	
		YAK-18 MAX	821	
		YAK-28 MAESTRO	822	
		TF-104 STARFIGHTER	823	
		T-46A	824	
		EMB-312 TOUCAN	825	
		T-45 GOSHAWK	826	
		T-47	827	
		AS202	828	
		CT114 TUTOR	829	
		G91T (FIAT JET 1)	830	
		K8 (NAMC)	831	

5.2-1023

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1	(CONTINUED)	

		L70 VINKA	832	
		STRIKEMASTER (BAE)	833	
		T1 JAYHAWK	834	
		T4 (KAWASAKI)	835	
		CT-142 DASH 8	836	
		B-55 BARON	837	
		F-33 BONANZA	838	
		839 PILLAN-TAMIZ	839	
		CT-133 SILVERSTAR	840	
		UNDEFINED	841 THROUGH 1022	
		TRAINER GENERAL	1023	

		TRANSPORT/AIRLINER		

		C-1 (GRUMMAN COD)	1024	
		C-2 GREYHOUND	1025	
		C-5 GALAXY	1026	
		C-7 CARIBOU	1027	
		C-9 NIGHTINGALE	1028	
		C-12 HURON	1029	
		C-123 PROVIDER	1030	
		C-130 HERCULES	1031	
		C-135 STRATOLIFTER	1032	
		C-140 JETSTAR	1033	
		C-141 STARLIFTER	1034	
		HC-130 HERCULES	1035	
		VC-6 KING AIR	1036	
		VC-9 SKYTRAIN II	1037	
		VC-11 GULFSTREAM	1038	
		VC-137 (BOEING)	1039	
		707 (BOEING)	1040	
		720 (BOEING)	1041	
		727 (BOEING)	1042	
		737 (BOEING)	1043	
		747 (BOEING)	1044	
		757 (BOEING)	1045	
		767 (BOEING)	1046	
		L-100 HERCULES	1047	
		L-1011 TRI STAR	1048	
		DC-8 (DOUGLAS)	1049	
		DC-9 (DOUGLAS)	1050	

FIELD CODING FOR J12.7C2

(SHEET 16)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1	(CONTINUED)	

		DC-10 (DOUGLAS)	1051	
		C-119	1052	
		DC-130	1053	
		HC-97	1054	
		C-JM	1055	
		C-54	1056	
		C-97	1057	
		C-118	1058	
		C-119	1059	
		C-121	1060	
		C-124	1061	
		C-131	1062	
		C-133	1063	
		VC-47	1064	
		CV-54	1065	
		CV-140	1066	
		ARAVA	1067	
		CONCORDE	1068	
		ISLANDER	1069	
		SKYVAN	1070	
		TRIDENT	1071	
		A300 AIRBUS	1072	
		A310 AIRBUS	1073	
		C-1 (KAWASKI)	1074	
		C-160 TRANSALL	1075	
		C.207 AZOR	1076	
		C-212 AVIOCAR	1077	
		F27 FRIENDSHIPS	1078	
		F28 FELLOWSHIP	1079	
		G222 SAMA	1080	
		AW.660 ARGOSY	1081	
		BAC111 ONE-ELEVEN	1082	
		DHC-5 BUFFALO	1083	
		DHC-7 DASH	1084	
		AN-2 COLT	1085	
		AN-10 CAT	1086	
		AN-12 CUB	1087	
		AN-14 CLOD	1088	
		AN-22 COCK	1089	
		AN-24 COKE	1090	
		AN-26 CURL	1091	
		AN-28 CASK	1092	
		AN-30 CLANK	1093	

5.2-1025

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 17)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1	(CONTINUED)	

		AN-32 CLINE	1094	
		AN-40 (VERY LARGE TURBO-PROP)	1095	
		AN-72 COALER	1096	
		IL-12 COACH	1097	
		IL-18 COOT	1098	
		IL-62 CLASSIC	1099	
		IL-76 CANDID	1100	
		IL-86 CAMBER	1101	
		TU-114 CLEAT	1102	
		TU-134 CRUSTY	1103	
		TU-144 CHARGER	1104	
		TU-154 CARELESS	1105	
		YAK-40 CODDLING	1106	
		YAK-42 CLOBBER	1107	
		TU-104	1108	
		YAK-27	1109	
		IL-38	1110	
		DISUSED	1111	
		DO-228 LT (TRANSPORT)	1112	
		DISUSED	1113	
		AN-74	1114	
		AN-124 CONDOR	1115	
		A320 AIRBUS	1116	
		A321 AIRBUS	1117	
		A330 AIRBUS	1118	
		A340 AIRBUS	1119	
		AN-70	1120	
		AN-225 COSSACK	1121	
		BAE-125-600	1122	
		BAE146	1123	
		777 (BOEING)	1124	
		C-17 GLOBEMASTER III	1125	
		C-20 GULFSTREAM 3/4	1126	
		C-21 LEARJET 35	1127	
		C-22	1128	
		C-23 SHERPA/SHORTS 330	1129	
		C-26 METRO 3	1130	
		YS 11 (NAMC)	1131	
		CL-600 CHALLENGER	1132	
		CL-601 CHALLENGER	1133	
		CN-235M (AIRTECH)	1134	
		EMB-120 BRASILLIA ADV	1135	

FIELD CODING FOR J12.7C2

(SHEET 18)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1	(CONTINUED)	

		EMB-145 AMAZON	1136	
		IL-78 MIDAS	1137	
		MD-11	1138	
		MD-80	1139	
		MD-90	1140	
		PD-808	1141	
		TU-44	1142	
		V-22 OSPREY	1143	
		VC-25	1144	
		XC-2	1145	
		1124 (IAI)	1146	
		1900 (BEECH)	1147	
		330 (SHORTS)	1148	
		580 (CONVAIR)	1149	
		ATR42	1150	
		B55 BARON	1151	
		BN2 ISLANDER	1152	
		C46 COMMANDO	1153	
		CARAVELL (SUD)	1154	
		CC109 (CANADAIR)	1155	
		CHALLENGER (CANADAIR)	1156	
		DHC2	1157	
		DHC6 TWIN OTTER	1158	
		DHC8	1159	
		EMB110 BANDEIRANTE	1160	
		EMB121	1161	
		FALCON 200/FALCON 20	1162	
		FALCON 50	1163	
		FALCON 900	1164	
		FH227 FRIENDSHIP	1165	
		FOKKER 100	1166	
		FOKKER 50	1167	
		FOKKER 60	1168	
		FOKKER 70	1169	
		GROB G850	1170	
		GULFSTREAM 1	1171	
		GULFSTREAM 2	1172	
		JETSTREAM	1173	
		JETSTREAM 31	1174	
		KING AIR	1175	
		L410 TURBOJET	1176	
		LEARJET 23	1177	
		LEARJET 24	1178	

5.2-1027

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 19)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1	(CONTINUED)	

		LEARJET 25 (IMPROVED VER 28)	1179	
		LEARJET 35/36	1180	
		LEARJET 55 (IMPROVED VER 28)	1181	
		LEARJET 60	1182	
		MERLIN 2	1183	
		MERLIN 3	1184	
		MERLIN 4	1185	
		METRO 3	1186	
		SAAB 2000	1187	
		SAAB 340	1188	
		SABRELINER	1189	
		U6 BEAVER	1190	
		VISCOUNT	1191	
		W3 SOKOL	1192	
		Y11 (HAMC)	1193	
		Y12 (HAMC)	1194	
		Y5	1195	
		CC-115 BUFFALO	1196	
		CC-130 HERCULES	1197	
		CC-150 POLARIS	1198	
		C-235 CASA	1199	
		CC-138 TWIN OTTER	1200	
		D0-228 LM (POLLUTION CONTROL)	1201	
		UNDEFINED	1202 THROUGH 1277	
		LIGHT CIVIL	1278	
		TRANSPORT/AIRLINER GENERAL	1279	

		HELICOPTERS		

		AH-1 COBRA	1280	
		AH-64 APACHE	1281	
		CH-3 (SIKORSKY)	1282	
		CH-46 (SEA KNIGHT)	1283	
		CH-47 CHINOOK	1284	
		CH-53 SEA STALLION	1285	
		CH-54 LARKE (SKYCRANE)	1286	
		EH-60 QUICK FOX	1287	

5.2-1028

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 20)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1	(CONTINUED)	

		HH-1 IROQUOIS	1288	
		HH-2 SEA SPRITE	1289	
		HH-3 JOLLY GREEN	1290	
		HH-52 (SIKORSKY)	1291	
		HH-53 (SIKORSKY)	1292	
		OH-6 (HUGHES)	1293	
		OH-58 KIOWA	1294	
		RH-3 SEA KING	1295	
		RH-53 (SIKORSKY)	1296	
		SH-2 SEA SPRITE	1297	
		SH-3 SEA KING	1298	
		SH-60 SEA HAWK	1299	
		UH-1 IROQUOIS	1300	
		UH-2 SEA SPRITE	1301	
		UH-12 (HILLER)	1302	
		UH-46 (BOEING)	1303	
		UH-60 BLACK HAWK	1304	
		CH-2U	1305	
		HH-43	1306	
		A109 (AGUSTA)	1307	
		A129 MONGOOSE	1308	
		B0-105 (MBB)	1309	
		DISUSED	1310	
		CH-124 SEA KING	1311	
		DISUSED	1312 THROUGH 1314	
		SA 315 LAMA	1315	
		DISUSED	1316	
		DISUSED	1317	
		SA 321 SUPER FRELON	1318	
		SA 330 PUMA	1319	
		SA 332 SUPER PUMA	1320	
		S 342 GAZELLE	1321	
		SA 350 ASTAR	1322	
		SA 360 DAUPHIN	1323	
		SA 361 DAUPHIN	1324	
		WG-13 LYNX	1325	
		WG-34 (WESTLAND)	1326	
		KA-18 HOG	1327	
		KA-20 HARP	1328	
		KA-25 HORMONE	1329	
		KA-26 HOODLUM	1330	
		MI-1 HARE	1331	
		MI-2 HOPLITE	1332	

FIELD CODING FOR J12.7C2 (SHEET 21)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1	(CONTINUED)	

		MI-4 HOUND	1333	
		MI-6 HOOK	1334	
		MI-8 HIP	1335	
		MI-10 HARKE	1336	
		MI-12 HOMER	1337	
		MI-14 HAZE	1338	
		MI-24 HIND	1339	
		MI-26 HALO	1340	
		CH-53E SUPER STALLION	1341	
		MH-53E SEA DRAGON	1342	
		HH-60 NIGHT HAWK	1343	
		HH-65A DOLPHIN	1344	
		KA-27 HELIX-A (ASW)	1345	
		KA-32 HELIX	1346	
		MI-17 HIP-H	1347	
		MI-28 HAVOC	1348	
		ECUREUIL/FENNEL/ESQILO	1349	
		KA-29 HELIX-B	1350	
		KA-50 HOKUM	1351	
		204 BELL	1352	
		205 BELL	1353	
		206 BELL	1354	
		214 BELL	1355	
		280 ENSTROM	1356	
		300 SCHWEIZER	1357	
		406 COMBAT SCOUT	1358	
		A 109 HIRUNDO	1359	
		A 129 MANGUSTA	1360	
		AH 6 CAYUSE	1361	
		ALOUETTE 2	1362	
		ALOUETTE 3	1363	
		AS 350 ECUREUIL	1364	
		AS 532 COUGAR	1365	
		AS 550 FENNEC	1366	
		AS 555 FENNEC	1367	
		AS 565 PANTHER	1368	
		CH 34 WESTLAND	1369	
		EH 101	1370	
		HAS 1 WASP	1371	
		KA-28 HELIX A	1372	
		MD 500 DEFENDER	1373	
		MI 22	1374	
		MI 25	1375	

FIELD CODING FOR J12.7C2

(SHEET 22)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1	(CONTINUED)	

		MI 35	1376	
		MI 9	1377	
		SA 341 GAZELLE	1378	
		SA 342 GAZELLE	1379	
		SA 365 DAUPHIN 2	1380	
		TS11 ISKRA	1381	
		WESSEX	1382	
		Z9 (HARBIN)	1383	
		CH-146 GRIFFON	1384	
		SEA KING AEW (SKW)	1385	
		EH 101 MERLIN	1386	
		AB-212 AUGUSTA BELL	1387	
		BO-105 BOLKOW	1388	
		CH-47 CHINOOK	1389	
		HUGHES 500	1390	
		HUGHES 3000	1391	
		SH-3D SIKORSKY	1392	
		SH-70L SIKORSKY	1393	
		CH-113 LABRADOR	1394	
		NH 90 (C2)	1395	
		NH 90 (RECCE)	1396	
		NH 90 (EW/SEAD)	1397	
		NH 90 (TRANSPORT)	1398	
		SEA LYNX MK88A	1399	
		SEA KING MK41 (KWS)	1400	
		TIGER (HAP)	1401	
		NH 90 (NAVY)	1402	
		TIGER (HAC)	1403	
		SA 341 GAZELLE CANON	1404	
		AS 532 COUGAR HORIZON	1405	
		AW-520 SAR CORMORANT	1406	
		UNDEFINED	1407 THROUGH 1534	
		HELICOPTER GENERAL	1535	

		AIR-AIR MISSILES		

		AIM-4A FALCON	1536	
		AIM-7 SPARROW	1537	
		AIM-9 SIDEWINDER	1538	
		AIM-54 PHOENIX	1539	
		AIM-2A GENIE	1540	

5.2-1031

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 23)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1	(CONTINUED)	

		AIM-120 AMRAAM	1541	
		ASLAM	1542	
		R.530	1543	
		R.550 MAGIC	1544	
		S.530 SUPER 530	1545	
		ASPIDER	1546	
		DISUSED	1547	
		SHAFRIR	1548	
		SKY FLASH	1549	
		DISUSED	1550	
		AA-2 ATOLL	1551	
		AA-3 ANAB	1552	
		AA-5 ASH	1553	
		AA-6 ACRID	1554	
		AA-7 APEX	1555	
		AA-8 APHID	1556	
		AAM	1557	
		AA-9 AMOS	1558	
		AA-XP-1/2	1559	
		AQM-34	1560	
		AQM-91	1561	
		BGM-34 FIREBEE/MQM34	1562	
		YQM-94	1563	
		YQM-98	1564	
		AIM-132 ASRAAM	1565	
		MICA	1566	
		PL-2A	1567	
		PL-5B	1568	
		PL-7	1569	
		PL-9	1570	
		PYTHON 3	1571	
		PYTHON 4	1572	
		AA-10 ALAMO	1573	
		AA-11 ARCHER	1574	
		AA-12 ADDER	1575	
		AA-1 ALKALI	1576	
		AAM-1	1577	
		UNDEFINED	1578 THROUGH 1790	
		AIR-TO-AIR MISSILE	1791	
		GENERAL		

5.2-1032

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 24)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1	(CONTINUED)	

		AIR-GROUND/GROUND-		
		GROUND MISSILES		

		AGM-45 SHRIKE	1792	
		AGM-65 MAVERICK	1793	
		AGM-69 SRAM	1794	
		AGM-78 STANDARD ARM	1795	
		AGM-84 HARPOON	1796	
		AGM-86 ALCM	1797	
		AGM-88 HARM	1798	
		AGM-109 TOMAHAWK	1799	
		AM 39 EXOCET	1800	
		AGM-119 PENGUIN	1801	
		AS 11 KILTER	1802	
		AS 12 KEGLER	1803	
		AS 15 KENT	1804	
		AS 30	1805	
		DISUSED	1806	
		RB 05	1807	
		RB 08	1808	
		ADVANCED ASM	1809	
		AS-1 KENNEL	1810	
		AS-2 KIPPER	1811	
		AS-3 KANGAROO	1812	
		AS-4 KITCHEN	1813	
		AS-5 KELT	1814	
		AS-6 KINGFISH	1815	
		AS-7 KERRY	1816	
		DISUSED	1817	
		AS-10 KAREN	1818	
		AS-9 KYLE	1819	
		AS 34 KORMORAN	1820	
		ASM GABRIEL	1821	
		ASM SEA SKUA	1822	
		ASM SEA EAGLE	1823	
		ASMP	1824	
		AT-2 SWATTER	1825	
		AT-3 SAGGER	1826	
		AT-6 SPIRAL	1827	
		C-601	1828	
		C-611	1829	

FIELD CODING FOR J12.7C2

(SHEET 25)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1	(CONTINUED)	

		C-801	1830	
		C-802	1831	
		CSS-2	1832	
		CSS-3	1833	
		CSS-N-3	1834	
		CSS-X-4	1835	
		FL-2 SILKWORM	1836	
		FL-7	1837	
		HY-2	1838	
		HY-3	1839	
		M-9/11	1840	
		WS-1	1841	
		AS-13 KINGBOLT	1842	
		AS-14 KEDGE	1843	
		AS-16 KICKBACK	1844	
		AS-17 KRYPTON	1845	
		AS-18 KAZOO	1846	
		AT-4 SPIGOT	1847	
		AT-5 SPANDREL	1848	
		AT-7 SAXHORN	1849	
		AT-10 STABBER	1850	
		AT-11 SNIPER	1851	
		AT-12	1852	
		AT-13	1853	
		AT-14	1854	
		FROG-7	1855	
		SS-1 SCUD	1856	
		SS-11 SEGO	1857	
		SS-13 SAVAGE	1858	
		SS-18 SATAN	1859	
		SS-19 STILETTO	1860	
		SS-24 SCALPEL	1861	
		SS-25 SICKLE	1862	
		SS-N-2 STYX	1863	
		SS-N-3 SHADDOCK	1864	
		SS-N-6 SERB	1865	
		SS-N-7 STARBRIGHT	1866	
		SS-N-8 SAWFLY	1867	
		SS-N-9 SIREN	1868	
		SS-N-12 SANDBOX	1869	
		SS-N-18 STINGRAY	1870	
		SS-N-19 SHIPWRECK	1871	
		SS-N-20 STURGEON	1872	

5.2-1034

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 26)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1	(CONTINUED)	

		SS-N-21 SAMPSON	1873	
		SS-N-22 SUNBURN	1874	
		SS-N-23 SKIFF	1875	
		SS-N-26	1876	
		AGNI	1877	
		PRITHVI	1878	
		TOW	1879	
		AGM-114 HELLFIRE	1880	
		MLRS	1881	
		HOT	1882	
		MILAN	1883	
		TRIGAT	1884	
		OTOMAT	1885	
		RBS-15M	1886	
		ARMAT	1887	
		ALARM	1888	
		AGM-12 BULLPUP	1889	
		AGM-62A WALLEYE	1890	
		AGM-123A SKIPPER II	1891	
		APACHE (ASM)	1892	
		AS 8	1893	
		AT-1 SWATTER	1894	
		CAS1	1895	
		KH-41 MOSKIT	1896	
		MARTIN PESCADOR	1897	
		MAS1 CARCARA	1898	
		RB 04E	1899	
		STAR	1900	
		SEA INDIGO	1901	
		MM 38	1902	
		MM 40	1903	
		SM 39	1904	
		AS 34 KORMORAN II	1905	
		UNDEFINED	1906 THROUGH 2046	
		AIR-GROUND MISSILE	2047	
		GENERAL		

		SURFACE TO AIR MISSILES		

		FIM-92 STINGER	2048	
		NIM-23 HAWK	2049	

5.2-1035

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 27)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1	(CONTINUED)	

		MIM-42 REDEYE	2050	
		MIM-72 CHAPARRAL	2051	
		MIM-104 PATRIOT	2052	
		RIM-2 TERRIER	2053	
		RIM-7 SEA SPARROW	2054	
		RIM-8 TALOS	2055	
		RIM-24 TARTAR	2056	
		RIM-66 STANDARD MISSILE	2057	
		RIM-67 STANDARD MISSILE	2058	
		BLOWPIPE	2059	
		DISUSED	2060 THROUGH 2061	
		SEA DART	2062	
		DISUSED	2063	
		SEA WOLF	2064	
		S 440 CROTALE EDIR	2065	
		RAPIER	2066	
		RBS-70 (SLM)	2067	
		DISUSED	2068	
		SAM ROLAND	2069	
		SA-2 GUIDELINE	2070	
		SA-3 GOA	2071	
		SA-4 GANEF	2072	
		SA-N-3 GOBLET	2073	
		SA-5 GAMMON	2074	
		SA-N-4 GECKO	2075	
		SA-6 GAINFUL	2076	
		SA-N-6 GRUMBLE	2077	
		SA-7 GRAIL	2078	
		SA-8 GECKO	2079	
		SA-9 GASKIN	2080	
		SA-10 GRUMBLE	2081	
		SA-11 GADFLY	2082	
		SA-12	2083	
		SA-13 GOPHER	2084	
		MISTRAL	2085	
		SA-N-7 GADFLY	2086	
		SA-N-8 GREMLIN	2087	
		SA-14 GREMLIN	2088	
		SA-16 GIMLET	2089	
		SA-X-17	2090	
		SA-N-5 GRAIL	2091	
		SA-N-11 GRISOM	2092	
		SA-12A GLADIATOR	2093	

5.2-1036

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 28)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	002	AIR AMBIGUOUS TYPE 1	(CONTINUED)	

		SA-12B GIANT	2094	
		SA-14 GREMLIN	2095	
		SA-15 GAUNTLET	2096	
		SA-17 GRIZZLY	2097	
		SA-N-12 GRIZZLY	2098	
		SA-18 GROUSE	2099	
		SA-19 GRISOM	2100	
		RIM-116 RAM	2101	
		ADATS	2102	
		JAVELIN	2103	
		STARBURST	2104	
		STARSTREAK	2105	
		ASPIDE	2106	
		I-HAWK	2107	
		ROLAND II	2108	
		SM-2 BLOCK II	2109	
		SM-2 BLOCK III	2110	
		SM-2 BLOCK IIIA	2111	
		SM-2 BLOCK IIIB	2112	
		SM-2 BLOCK IV	2113	
		SM-2 BLOCK IVA	2114	
		SM-3 LEAP	2115	
		AKASH	2116	
		ANZA	2117	
		ANZA II	2118	
		CSA-1	2119	
		CSA-2	2120	
		CSA-4	2121	
		CSA-5	2122	
		FM-80	2123	
		HN-5	2124	
		NK-7	2125	
		NK-16	2126	
		PANTZYR	2127	
		RAPIER 2000/JERNAS	2128	
		RBS-90	2129	
		SAKR	2130	
		SAVA	2131	
		SHANINE	2132	
		SKYGUARD ASPIDE	2133	
		SPADA	2134	
		TAM SAM	2135	
		TIGERCAT	2136	

DFI DUI DUI/DI NAME DI BIT CODE DUI/DI EXPLANATION

804 002 AIR AMBIGUOUS TYPE 1 (CONTINUED)

VANGUARD 2137
SA-N-1 GOA 2138
SA-N-9 GAUNTLET 2139
SA-N-10 2140
ALBATROS/ASPID 2141
SM-1 2142
VT1 CROTALE 2143
MASURCA 2144
ASTER 15 2145
ASTER 30 2146
UNDEFINED 2147 THROUGH 4093
RESET TO NO STATEMENT 4094
SURFACE-TO-AIR MISSILE 4095
GENERAL

808 002 SURFACE (MARITIME) AMBIGUOUS TYPE 1

IDENTIFIES THE TARGET SPECIFIC TYPE AS DETERMINED BY AN ONBOARD CORRELATION PROCESS IF THERE ARE NO AMBIGUITIES. IDENTIFIES THE MOST PROBABLE TARGET SPECIFIC TYPE IN AN ONBOARD CORRELATION PROCESS DETERMINED THAT THE SPECIFIC TYPE IS AMBIGUOUS. INFORMATION IN THIS FIELD SHALL BE DERIVED ONLY FROM ONBOARD SOURCES AS OPPOSED TO DATA LINK SOURCES.

NO STATEMENT 0
CV GENERAL 1
CLEMENCEAU 2
ENTERPRISE 3
FORRESTAL 4
JOHN F KENNEDY 5
KITTY HAWK 6
MIDWAY 7
NIMITZ 8
CHARLES DE GAULLE 9
UNDEFINED 10 THROUGH 21
CVS GENERAL 22
DEDALO 23
MINAS GERAIS 24
VIKRANT 25
VEINTICINCO DE MAYO 26

FIELD CODING FOR J12.7C2

(SHEET 30)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		VIRAAT	27	
		UNDEFINED	28 THROUGH 35	
		CVH GENERAL	36	
		GIUSEPPE GARIBALDI	37	
		INVINCIBLE	38	
		JEANNE D'ARC	39	
		KIEV	40	
		PRINCIPE DE ASTURIAS	41	
		UNDEFINED	42	
		KIEV (MODIFIED)	43	
		UNDEFINED	44 THROUGH 52	
		BB GENERAL	53	
		IOWA	54	
		UNDEFINED	55 THROUGH 64	
		CC GENERAL	65	
		SVERDLOV (MODIFIED)	66	
		UNDEFINED	67 THROUGH 76	
		CG GENERAL	77	
		ANDREA DORIA	78	
		BAINBRIDGE	79	
		BELKNAP	80	
		CALIFORNIA	81	
		UNDEFINED	82	
		KARA	83	
		KIROV	84	
		KRESTA I	85	
		KRESTA II	86	
		KYNDA	87	
		LEAHY	88	
		LONG BEACH	89	
		SLAVA	90	
		TICONDEROGA	91	
		TRUXTUN	92	
		VIRGINIA	93	
		VITTORIO VENETO	94	
		UNDEFINED	95 THROUGH 118	
		CH GENERAL	119	
		MOSKVA	120	
		UNDEFINED	121 THROUGH 130	
		CA GENERAL	131	
		UNDEFINED	132	
		SVERDLOV	133	

FIELD CODING FOR J12.7C2

(SHEET 31)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		UNDEFINED	134 THROUGH 143	
		DD GENERAL	144	
		AKIZUKI	145	
		ALLEN M SUMNER	146	
		ALLEN M SUMNER FRAM II	147	
		ALMIRANTE	148	
		AMATSUKAZE	149	
		ANIMOSO	150	
		ANSHAN	151	
		ARLEIGH BURKE	152	
		ASAGARI	153	
		UNDEFINED	154	
		AUDACE	155	
		AYANAMI	156	
		DISUSED	157	
		CARPENTER FRAM I	158	
		CHARLES F ADAMS (MOD)	159	
		CHARLES F ADAMS	160	
		COONTZ	161	
		DISUSED	162 THROUGH 163	
		UNDEFINED	164	
		FLETCHER	165	
		FORREST SHERMAN (MOD) & HULL	166	
		FRIESLAND	167	
		GEARING FRAM I	168	
		GEARING FRAM II	169	
		UNDEFINED	170	
		DISUSED	171	
		HARUNA	172	
		HATAKAZE	173	
		HATSUYUKI	174	
		IMPAVIDO	175	
		KANIN	176	
		KASHIN (MODIFIED)	177	
		KASHIN	178	
		KASHIN II	179	
		KIDD	180	
		UNDEFINED	181	
		KILDIN (MODIFIED)	182	
		KOTLIN	183	
		KOTLIN (MODIFIED)	184	

FIELD CODING FOR J12.7C2

(SHEET 32)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		LUDA (TYPE 051)	185	
		MEKO 360	186	
		MINEGUMO	187	
		PROJECT 15	188	
		ROBERT H SMITH	189	
		ROGER D LAURIA	190	
		SAM KOTLIN	191	
		SHIRANE	192	
		SKORY	193	
		SOVREMENYY	194	
		SPRUANCE	195	
		SUFFREN	196	
		TACHIKAZE	197	
		TAKATSUKI	198	
		TYPE 42	199	
		DISUSED	200	
		DISUSED	201	
		TYPE F-70 (AAW)	202	
		TYPE F-70 (ASW)	203	
		TYPE F-67	204	
		UNDEFINED	205	THROUGH 206
		TYPE T-53 (MODIFIED-ASW)	207	
		UNDEFINED	208	
		UDALOY	209	
		YAMAGUMO	210	
		Z	211	
		IROQUOIS	212	
		UNDEFINED	213	THROUGH 276
		DE GENERAL	277	
		UNDEFINED	278	
		CASTLE	279	
		UNDEFINED	280	THROUGH 295
		FF GENERAL	296	
		ALMIRANTE CLEMENTE	297	
		ALMIRANTE PEREIRA DA SILVA	298	
		ALPINO	299	
		DISUSED	300	THROUGH 301
		BALEARES	302	
		BAPTISTA DE ANDRADE	303	
		UNDEFINED	304	
		BERK	305	

5.2-1041

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 33)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		BLACK SWAN	306	
		BROADSWORD (TYPE 22)	307	
		BRONSTEIN	308	
		BROOKE	309	
		CANNON	310	
		CHARLES LAWRENCE	311	
		CHENGDU	312	
		CHIKUGO	313	
		COMANDANTE JOAO BELO	314	
		UNDEFINED	315	
		CROSLEY	316	
		DEALEY	317	
		DESCUBIERTA	318	
		DUKE (TYPE 23)	319	
		DURANGO	320	
		EDSALL	321	
		GARCIA	322	
		GLOVER	323	
		GODAVARI	324	
		GRISHA I	325	
		GRISHA II	326	
		GRISHA III	327	
		UNDEFINED	328	
		GRISHA V	329	
		UNDEFINED	330	
		HVIDBJORNEN	331	
		ISHKARI	332	
		ISUZU	333	
		JACOB VAN HEEMSKERCK	334	
		JIANGDONG (TYPE 053J)	335	
		JIANGHU (TYPE 053H)	336	
		JIANGNAN	337	
		JOAO COUTINHO	338	
		KAREL DOORMAN	339	
		KNOX	340	
		DISUSED	341	
		KONI	342	
		KORTENAER	343	
		KRIVAK I	344	
		KRIVAK II	345	
		KRIVAK III	346	
		LA FAYETTE	347	

FIELD CODING FOR J12.7C2

(SHEET 34)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		DISUSED	348	
		LEOPARD	349	
		LUP0	350	
		M	351	
		DISUSED	352	
		MAESTRALE	353	
		MEKO 140 TYPE	354	
		MEKO 200 TYPE	355	
		MIRKA I	356	
		MIRKA II	357	
		NIELS JUEL	358	
		NITEROI	359	
		OLIVER HAZARD PERRY	360	
		OSLO	361	
		PEDER SKRAM	362	
		PETYA I (MODIFIED)	363	
		PETYA I	364	
		PETYA II (MODIFIED)	365	
		PETYA II	366	
		PETYA III	367	
		UNDEFINED	368	
		DISUSED	369	
		RIGA	370	
		RIVER	371	
		BRANDENBURG (TYPE 123)	372	
		RUDDEROW	373	
		SACHSEN (TYPE 124)	374	
		SAVAGE	375	
		DISUSED	376	
		TROMP	377	
		TYPE A 69	378	
		TYPE F-2000S	379	
		UNDEFINED	380 THROUGH 381	
		YUBARI	382	
		BREMEN (TYPE 122)	383	
		CLAUDE JONES	384	
		FFG 7	385	
		HALIFAX	386	
		NAJIN	387	
		PRESIDENT	388	
		SANTA MARIA	389	
		VOSPER MK 5	390	

5.2-1043

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		VOSPERTHORNYCROFT MK 7	391	
		WIELINGEN	392	
		FLOREAL	393	
		COMMANDANT BORY	394	
		UNDEFINED	395	THROUGH 478
		FS GENERAL	479	
		ALBATROS	480	
		AUK CLASS	481	
		DE CRISTOFARO	482	
		DISUSED	483	
		MINERVA	484	
		NANUCHKA I	485	
		NANUCHKA II	486	
		NANUCHKA III	487	
		DISUSED	488	
		PF-103	489	
		SAAR 5	490	
		SLEIPNER	491	
		TARANTUL I	492	
		TARANTUL II	493	
		DISUSED	494	
		WADI	495	
		UNDEFINED	496	THROUGH 517
		LL GENERAL	518	
		UNDEFINED	519	THROUGH 528
		LCC GENERAL	529	
		BLUE RIDGE	530	
		CAVEZZALE	531	
		UNDEFINED	532	THROUGH 540
		LKA GENERAL	541	
		CHARLESTON	542	
		UNDEFINED	543	THROUGH 552
		LFS GENERAL	553	
		UNDEFINED	554	THROUGH 563
		LHA GENERAL	564	
		TARAWA	565	
		UNDEFINED	566	THROUGH 575
		LHD GENERAL	576	
		WASP	577	
		UNDEFINED	578	THROUGH 587
		LPA GENERAL	588	
		UNDEFINED	589	THROUGH 598

FIELD CODING FOR J12.7C2

(SHEET 36)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		LPD GENERAL	599	
		AUSTIN	600	
		FEARLESS	601	
		IVAN ROGOV	602	
		UNDEFINED	603	
		RALEIGH	604	
		SAN GIORGIO	605	
		UNDEFINED	606 THROUGH 615	
		LPH GENERAL	616	
		IWO JIMA	617	
		UNDEFINED	618 THROUGH 627	
		LSD GENERAL	628	
		ANCHORAGE	629	
		ASHLAND	630	
		CABILDO	631	
		OURAGAN	632	
		FOUDRE	633	
		THOMASTON	634	
		WHIDBEY ISLAND	635	
		UNDEFINED	636 THROUGH 646	
		LSL GENERAL	647	
		SIR GERAINT	648	
		UNDEFINED	649 THROUGH 657	
		LSM GENERAL	658	
		ASHDOD	659	
		BATRAL	660	
		CAKABEY	661	
		EDIC I	662	
		EDIC II	663	
		LSM-1	664	
		MP-4	665	
		POLNOCHNY	666	
		POLOCHNY A	667	
		POLOCHNY B	668	
		POLOCHNY C	669	
		POLOCHNY D	670	
		YUDAO	671	
		YULIMG	672	
		BOUGAINVILLE	673	
		UNDEFINED	674 THROUGH 687	
		LST GENERAL	688	
		ALLIGATOR	689	

FIELD CODING FOR J12.7C2

(SHEET 37)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		ATSUMI	690	
		UNDEFINED	691	
		BROOKE MARINE 93M	692	
		CAKABEY NL-122	693	
		CNIM PS 700	694	
		DE SOTO COUNTY	695	
		DISUSED	696	
		HENGAM	697	
		LST 1-510	698	
		LST 511-1152	699	
		MIURA	700	
		NEWPORT	701	
		ROPUCHA	702	
		SARUCABEY	703	
		CNGF	704	
		OCEAN	705	
		ALBION	706	
		TERREBONNE PARISH	707	
		TOBRUK	708	
		UNDEFINED	709	
		YUKAN	710	
		UNDEFINED	711 THROUGH 730	
		LSV GENERAL	731	
		UNDEFINED	732 THROUGH 741	
		LC GENERAL	742	
		UNDEFINED	743 THROUGH 751	
		LCM GENERAL	752	
		CTM 1	753	
		HUNGNAM	754	
		LCM 1057/1058	755	
		LCM 6	756	
		LCM 8	757	
		T-4	758	
		TSAPLYA	759	
		LCM (TYPE 521)	760	
		UNDEFINED	761 THROUGH 772	
		LCP GENERAL	773	
		DISUSED	774	
		LCM 1031	775	
		LCM 1035/1036	776	
		LCM 1055/1056	777	
		NAMPO	778	

FIELD CODING FOR J12.7C2

(SHEET 38)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		UNDEFINED	779 THROUGH 788	
		LCPL GENERAL	789	
		UNDEFINED	790 THROUGH 799	
		LWC GENERAL	800	
		UNDEFINED	801 THROUGH 810	
		LCU GENERAL	811	
		BALIKPAPAN	812	
		BOMBARDA	813	
		BRAILA	814	
		LCU (TYPE 520)	815	
		DISUSED	816	
		DISUSED	817	
		DISUSED	818	
		DSM-501	819	
		HANCHON	820	
		HANTAE	821	
		KISHON	822	
		KVALSUND	823	
		LCT MK 5	824	
		LCT MK 6	825	
		LCU 501	826	
		MFP D-3	827	
		MZ	828	
		REINOYSUND	829	
		SMB-1	830	
		TU 57-M	831	
		US LCU 1466	832	
		VYDRA	833	
		YURA	834	
		UNDEFINED	835 THROUGH 866	
		LCVP GENERAL	867	
		UNDEFINED	868 THROUGH 877	
		LCAC GENERAL	878	
		AIST	879	
		GUS	880	
		LEBED	881	
		UTENOK	882	
		WELLINGTON BH-7 MK 4	883	
		WELLINGTON BH-7 MK 5	884	
		WINCHESTER (SR.N6)	885	
		UNDEFINED	886 THROUGH 896	
		MM GENERAL	897	

5.2-1047

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1 -----	(CONTINUED)	
		ALESHA	898	
		ALVSBORG	899	
		BORGEN	900	
		CARLSKRONA	901	
		COSAR	902	
		FALSTER	903	
		FURUSUND (MUL-20)	904	
		LANGELAND	905	
		LINDORMEN	906	
		LSM-1 (MODIFIED)	907	
		MUL-11	908	
		MUL-12	909	
		DISUSED	910	
		SMITH	911	
		US YMP	912	
		VIDAR	913	
		UNDEFINED	914 THROUGH 935	
		MCS GENERAL	936	
		UNDEFINED	937 THROUGH 946	
		MCJ GENERAL	947	
		UNDEFINED	948 THROUGH 957	
		MCD GENERAL	958	
		KINGSTON	959	
		MUEHLHAUSEN MCD (TYPE 742A)	960	
		UNDEFINED	961 THROUGH 968	
		MCM GENERAL	969	
		UNDEFINED	970 THROUGH 979	
		MH GENERAL	980	
		UNDEFINED	981 THROUGH 990	
		MHO GENERAL	991	
		UNDEFINED	992 THROUGH 1001	
		MHC GENERAL	1002	
		ADJUTANT (MODIFIED)	1003	
		AGGRESSIVE	1004	
		CIRCE	1005	
		WEIDEN MHC (TYPE 332)	1006	
		KOBLENZ MHC (TYPE 331B)	1007	
		UNDEFINED	1006 THROUGH 1007	
		HAM	1008	
		HUNT	1009	
		LANDSORT	1010	

FIELD CODING FOR J12.7C2

(SHEET 40)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		LERICI	1011	
		MSC 50	1012	
		MSO 218	1013	
		MSO 503	1014	
		SAUDA	1015	
		SIRIUS	1016	
		DISUSED	1017	
		TRIPARTITE	1018	
		VANYA I	1019	
		SANDOWN (SRMH)	1020	
		UNDEFINED	1021 THROUGH 1029	
		MHSC GENERAL	1030	
		MARS	1031	
		UNDEFINED	1032 THROUGH 1043	
		MHI GENERAL	1044	
		BAY	1045	
		UNDEFINED	1046 THROUGH 1054	
		MHA GENERAL	1055	
		UNDEFINED	1056 THROUGH 1065	
		ML GENERAL	1066	
		UNDEFINED	1067 THROUGH 1076	
		MLC GENERAL	1077	
		CURLEW	1078	
		UNDEFINED	1079 THROUGH 1088	
		MLI GENERAL	1089	
		UNDEFINED	1090 THROUGH 1099	
		MLO GENERAL	1100	
		UNDEFINED	1101 THROUGH 1110	
		MLR GENERAL	1111	
		UNDEFINED	1112 THROUGH 1121	
		MLA GENERAL	1122	
		UNDEFINED	1123 THROUGH 1132	
		MLS GENERAL	1133	
		UNDEFINED	1134 THROUGH 1143	
		MS GENERAL	1144	
		UNDEFINED	1145 THROUGH 1154	
		MSF GENERAL	1155	
		EX-ERIMO	1156	
		K-8	1157	
		KROGULEC	1158	
		M-40	1159	
		MSO-421	1160	

5.2-1049

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 41)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		NATYA I	1161	
		NATYA II	1162	
		RIVER	1163	
		T-43	1164	
		YURKA	1165	
		UNDEFINED	1166 THROUGH 1180	
		MSO GENERAL	1181	
		ACME	1182	
		AGGRESSIVE	1183	
		UNDEFINED	1184 THROUGH 1193	
		MSC GENERAL	1194	
		136 FT	1195	
		ADJUTANT	1196	
		ARKOE	1197	
		BAY	1198	
		DOKKUM	1199	
		HATSUSHIMA	1200	
		HAYASE	1201	
		DISUSED	1202	
		KOUZJ	1203	
		LENIWKA	1204	
		HAMELN MSC (TYPE 343)	1205	
		MSC 268	1206	
		MSC 292	1207	
		MSC 294	1208	
		NOTEC	1209	
		SASHA	1210	
		SAUDA	1211	
		DISUSED	1212	
		DISUSED	1213	
		SONYA	1214	
		T-301	1215	
		T-43	1216	
		TAKAMI	1217	
		DISUSED	1218	
		VANYA	1219	
		VANYA I	1220	
		VANYA II	1221	
		WUSONG	1222	
		ZHENYA	1223	
		UNDEFINED	1224 THROUGH 1263	
		MSI GENERAL	1264	

5.2-1050

MIL-STD-6016B

FIELD CODING FOR J12.7C2 (SHEET 42)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1 -----	(CONTINUED)	
		DISUSED	1265	
		AUX MINESWEEPER NO 1	1266	
		CAPE	1267	
		FRAUENLOB (TYPE 394)	1268	
		HAM	1269	
		HERSTAL	1270	
		KIISKI	1271	
		KUHA	1272	
		M-111	1273	
		M-15	1274	
		M-31	1275	
		M-43/47	1276	
		PIPA-A	1277	
		WOCHANG	1278	
		YEVGENYA	1279	
		YUKTO	1280	
		UNDEFINED	1281	THROUGH 1302
		MSR GENERAL	1303	
		UNDEFINED	1304	THROUGH 1313
		MSB GENERAL	1314	
		K-8	1315	
		N-300	1316	
		NESTIN	1317	
		N0. 7	1318	
		OLYA	1319	
		PO-2	1320	
		TR-40	1321	
		VD-141	1322	
		VULCAIN	1323	
		STYX	1324	
		PLUTON	1325	
		ACHERON	1326	
		UNDEFINED	1327	THROUGH 1334
		MSA GENERAL	1335	
		UNDEFINED	1336	THROUGH 1345
		MSD GENERAL	1346	
		HFG-1 (TROIKA)	1347	
		ILYUSHA	1348	
		UNDEFINED	1349	THROUGH 1358
		MCSD GENERAL	1359	
		UNDEFINED	1360	THROUGH 1369
		MSS GENERAL	1370	

5.2-1051

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		ANDRYUSHA	1371	
		BALTIKA	1372	
		POLNOCNY	1373	
		UNDEFINED	1374 THROUGH 1383	
		MSH GENERAL	1384	
		UNDEFINED	1385 THROUGH 1394	
		MSO GENERAL	1395	
		BERLAIMONT (MODIFIED)	1396	
		UNDEFINED	1397 THROUGH 1405	
		MSHC GENERAL	1406	
		HUNT	1407	
		TRIPARTITE	1408	
		WILTON	1409	
		UNDEFINED	1410 THROUGH 1419	
		PP GENERAL	1420	
		AB 25	1421	
		UNDEFINED	1422	
		BALDER	1423	
		CASTLE	1424	
		ISLAND	1425	
		KRONSHADT	1426	
		PC-1638	1427	
		UNDEFINED	1428 THROUGH 1438	
		PG GENERAL	1439	
		BESKYTTEVREN	1440	
		BIHORO	1441	
		ERIMO	1442	
		DISUSED	1443	
		HVIDBJOERNEN	1444	
		IZU	1445	
		KOJIMA	1446	
		UNDEFINED	1447	
		NOJIMA	1448	
		PAUK	1449	
		PEACOCK	1450	
		POTI	1451	
		SAVAGE	1452	
		SHIRETOKO	1453	
		SOYA	1454	
		TACOMA	1455	
		LEOPARD (TYPE 148)	1456	
		BAMBU	1457	

FIELD CODING FOR J12.7C2

(SHEET 44)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		CASSIOPEA	1458	
		UNDEFINED	1459 THROUGH 1480	
		PGS GENERAL	1481	
		UNDEFINED	1482 THROUGH 1491	
		PGB GENERAL	1492	
		UNDEFINED	1493 THROUGH 1502	
		PGF GENERAL	1503	
		ALBATROS (TYPE 143)	1504	
		ASHEVILLE	1505	
		BARNEGAT	1506	
		CHONGJU	1507	
		GEPARD (TYPE 143A)	1508	
		HOUKU	1509	
		IVANSUSANIN	1510	
		KAMAN	1511	
		KARTAL	1512	
		KOMAR	1513	
		LA COMBATTANTE II	1514	
		LA COMBATTANTE III	1515	
		LURSSSEN FPB 57 TYPE	1516	
		OKHTENSKIY	1517	
		OSA I	1518	
		OSA II	1519	
		P-4	1520	
		PURGA	1521	
		SAAR 2	1522	
		SAAR 3	1523	
		SAAR 4	1524	
		SAAR 5	1525	
		SARIWON	1526	
		SNOEGG	1527	
		SOHUNG	1528	
		SOJU	1529	
		SORUM	1530	
		STORM	1531	
		T	1532	
		T-43	1533	
		T-58	1534	
		VOSPER 100-FT	1535	
		VOSPER BRAVE	1536	
		WILLEMOES	1537	
		UNDEFINED	1538 THROUGH 1583	

FIELD CODING FOR J12.7C2

(SHEET 45)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		PC GENERAL	1584	
		ADMIRABLE	1585	
		AGDLEK	1586	
		AKIZUKI	1587	
		ATTACK	1588	
		BAY	1589	
		DISUSED	1590	
		BROOKE MARINE 108-FT	1591	
		CACINE	1592	
		CHONGJU	1593	
		DAPHNE	1594	
		GDANSK	1595	
		HAIKOU	1596	
		HAINAN	1597	
		HANOE	1598	
		K-48	1599	
		KRALJEVICA	1600	
		KRONSHADT	1601	
		LAKE	1602	
		MAGAEN	1603	
		MATSUNAMI	1604	
		MIZUTORI	1605	
		MURAKUMO	1606	
		OBLUZE	1607	
		PGM 71	1608	
		SDB MK II	1609	
		SDB MK III	1610	
		SEAFORTH	1611	
		SHANGHAI	1612	
		SHANGHAI II	1613	
		SHANGHAI II (MODIFIED)	1614	
		SHIKINAMI	1615	
		SO-1	1616	
		SOMAN	1617	
		STENKA	1618	
		T-58	1619	
		TAECHONG	1620	
		UK FORD	1621	
		UMIGIRI	1622	
		US 110-FT	1623	
		US 173-FT	1624	
		UNDEFINED	1625	

5.2-1054

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 46)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		ARCHER	1626	
		ATTACKER	1627	
		23M PC (MANLY)	1628	
		UNDEFINED	1629 THROUGH 1681	
		PCF GENERAL	1682	
		BABOCHKA	1683	
		MURAVEY	1684	
		POTI	1685	
		SO-1 (MODIFIED)	1686	
		UNDEFINED	1687 THROUGH 1696	
		PCE GENERAL	1697	
		UNDEFINED	1698 THROUGH 1707	
		PB GENERAL	1708	
		AKAGI	1709	
		AKIZUKI	1710	
		ALBATROZ	1711	
		ATTACK P-90	1712	
		BARSO	1713	
		BAY	1714	
		BIZAN	1715	
		BROOKE MARINE 37.5M	1716	
		CHONGJIN	1717	
		DABUR	1718	
		DALARO	1719	
		DE L'ESTEREL	1720	
		DILOS	1721	
		DOM ALEIXO	1722	
		DISUSED	1723	
		FREMANTLE	1724	
		GOULANDRIS	1725	
		GUANABACOA	1726	
		HAMAGIRI	1727	
		HAMELIN 37M	1728	
		HIDAKA	1729	
		HUANGPU	1730	
		INTERCEPTOR MK II	1731	
		KIMJIN 67-FT	1732	
		MATSUNAMI	1733	
		MURAKUMO	1734	
		OIRASE	1735	
		P 400	1736	
		P-6	1737	

5.2-1055

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 47)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		PANAGOPOULOS	1738	
		PATRA	1739	
		PBR MK II	1740	
		PBR MK III	1741	
		PGM 71	1742	
		PO-2	1743	
		POLISH K-8	1744	
		POLUCHAT I	1745	
		SHANTOU	1746	
		SHIKINAMI	1747	
		SINHUNG 72-FT	1748	
		SKANOER	1749	
		SOYA/TSUGARU	1750	
		SPEAR	1751	
		STEWART 85-FT	1752	
		SWATOW	1753	
		SWIFT	1754	
		TAISHAN	1755	
		TESHIO	1756	
		TRACKER II	1757	
		US 110-FT	1758	
		US ARMY 2001 65-FT	1759	
		USCG 83-FT	1760	
		VEDETTE 28 92-FT	1761	
		VIKRAM	1762	
		VOSPER 70-FT	1763	
		YAMAYURI	1764	
		ZHUK	1765	
		SNOEGG	1766	
		MARS	1767	
		TRIDENT	1768	
		UNDEFINED	1769 THROUGH 1842	
		PBF GENERAL	1843	
		CHAO (CHODO)	1844	
		DE L'ESTEREL	1845	
		GIRNE	1846	
		HAUK	1847	
		HUGIN	1848	
		SLEPEN	1849	
		UNDEFINED	1850	
		SPICA II	1851	
		MARS	1852	

5.2-1056

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 48)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1 -----	(CONTINUED)	
		UNDEFINED	1853 THROUGH 1863	
		PBS GENERAL	1864	
		UNDEFINED	1865 THROUGH 1874	
		PBR GENERAL	1875	
		LEIE	1876	
		PIYAVKA	1877	
		SHMEL	1878	
		VOSH	1879	
		YATUSH	1880	
		YAZ	1881	
		UNDEFINED	1882 THROUGH 1891	
		PT GENERAL	1892	
		AN JU	1893	
		EPITROP	1894	
		HIGGINS 78-FT	1895	
		HUCHUAN PTH-	1896	
		HUZHOU	1897	
		IWON	1898	
		DISUSED	1899	
		KU SONG	1900	
		NO. 11	1901	
		P-4	1902	
		P-6	1903	
		PILICA	1904	
		SHERSHEN	1905	
		SIN HUNG	1906	
		SIN NAM	1907	
		SINPO	1908	
		SOLOVEN	1909	
		SPICA	1910	
		TJELD	1911	
		WISLA	1912	
		DISUSED	1913	
		SHANGDONG	1914	
		TURYA	1915	
		UNDEFINED	1916 THROUGH 2047	
		PHM GENERAL	2048	
		MATKA	2049	
		PEGASUS	2050	
		SARANCHA	2051	
		SHIMRIT	2052	
		SPARVIERO	2053	

5.2-1057

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 49)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1 -----	(CONTINUED)	
		UNDEFINED	2054 THROUGH 2063	
		BM GENERAL	2064	
		UNDEFINED	2065 THROUGH 2074	
		BMR GENERAL	2075	
		UNDEFINED	2076 THROUGH 2085	
		SWCL GENERAL	2086	
		UNDEFINED	2087 THROUGH 2096	
		AA GENERAL	2097	
		UNDEFINED	2098 THROUGH 2107	
		AG GENERAL	2108	
		ADOLF	2109	
		AKIZUKI	2110	
		ANGARA	2111	
		ARGO	2112	
		AYANAMI	2113	
		DISUSED	2114 THROUGH 2115	
		CHAMOIS	2116	
		CHIHAYA	2117	
		DALDYN	2118	
		DISUSED	2119	
		DINGHAI	2120	
		ENDURANCE	2121	
		EXPLORER	2122	
		DISUSED	2123	
		FRIPONNE	2124	
		GALEB	2125	
		UNDEFINED	2126	
		HAM	2127	
		DISUSED	2128	
		HAYABUSA	2129	
		DISUSED	2130	
		ISLES	2131	
		KEYLA	2132	
		KURIHAMA	2133	
		L'ARCHEONAUTE	2134	
		L'ATHOS	2135	
		UNDEFINED	2136	
		LENTA	2137	
		LIANYUN	2138	
		LSIL	2139	
		MIZUTORI	2140	
		MP-2	2141	

5.2-1058

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 50)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		MP-8	2142	
		MURASAME	2143	
		NEFTEGAZ	2144	
		NØ. 81	2145	
		NORGE	2146	
		OHRE	2147	
		ONEGA	2148	
		DISUSED	2149	
		POSEIDON	2150	
		PS-10	2151	
		RARI	2152	
		RHIN	2153	
		SABAC	2154	
		SHAHSAVAR	2155	
		ST. LYKODIS	2156	
		STALWART	2157	
		T-43	2158	
		TAPATAI	2159	
		TAPPE	2160	
		THULE	2161	
		TOMBA	2162	
		TSUGARU	2163	
		UMITAKA	2164	
		US 184 FT. PCE	2165	
		US 72 FT. HMDL	2166	
		VANGUARD	2167	
		VIS	2168	
		VYTEGRALES	2169	
		WHISKEY	2170	
		WILHELM PULLWER (TYPE 741)	2171	
		PELIKAAN	2172	
		RANCE	2173	
		MERCURE	2174	
		STERNE	2175	
		ALBATROS	2176	
		PHENIX	2177	
		UNDEFINED	2178 THROUGH 2256	
		ARV GENERAL	2257	
		ARGUS	2258	
		ENGADINE	2259	
		RELIANT	2260	

5.2-1059

MIL-STD-6016B

FIELD CODING FOR J12.7C2 (SHEET 51)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1 -----	(CONTINUED)	
		UNDEFINED	2261 THROUGH 2270	
		AVT GENERAL	2271	
		LEXINGTON	2272	
		UNDEFINED	2273 THROUGH 2282	
		AE GENERAL	2283	
		EVROS	2284	
		DISUSED	2285	
		KILAUEA	2286	
		NITRO	2287	
		REGENT	2288	
		SURIBACHI	2289	
		WESTERWALD (TYPE 760)	2290	
		UNDEFINED	2291 THROUGH 2301	
		AEL GENERAL	2302	
		UNDEFINED	2303 THROUGH 2312	
		AET GENERAL	2313	
		UNDEFINED	2314 THROUGH 2323	
		AETL GENERAL	2324	
		UNDEFINED	2325 THROUGH 2334	
		AGF GENERAL	2335	
		ABDIEL	2336	
		CORONADO	2337	
		GODETIA	2338	
		LA SALLE	2339	
		DISUSED	2340	
		ZINNIA	2341	
		ELBE (TYPE 404)	2342	
		UNDEFINED	2343 THROUGH 2351	
		ACM GENERAL	2352	
		UNDEFINED	2353 THROUGH 2362	
		APB GENERAL	2363	
		MICHELANGELO	2364	
		UNDEFINED	2365 THROUGH 2374	
		ABU GENERAL	2375	
		CARDENAS	2376	
		FINIK I	2377	
		KARPF II	2378	
		SKB 64	2379	
		YANTAI	2380	
		YANNAN	2381	
		YANGUAN	2382	
		TIANEE	2383	

FIELD CODING FOR J12.7C2 (SHEET 52)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		LA PRUDENTE	2384	
		UNDEFINED	2385 THROUGH 2395	
		ABUD GENERAL	2396	
		UNDEFINED	2397 THROUGH 2406	
		ANL GENERAL	2407	
		UNDEFINED	2408 THROUGH 2417	
		ARC GENERAL	2418	
		EMBA I	2419	
		EMBA II	2420	
		KALAR	2421	
		KLASMA	2422	
		MP-2	2423	
		NEPTUNE	2424	
		TELNOVSK (MODIFIED)	2425	
		YOUDIAN	2426	
		ZEUS	2427	
		UNDEFINED	2428 THROUGH 2440	
		AK GENERAL	2441	
		2ND LT JOHN P BOBO	2442	
		ALCHIBA	2443	
		AMGUEMA	2444	
		ANDIZHAN	2445	
		ANDONG	2446	
		ANDROMEDA (CONVERTED)	2447	
		DISUSED	2448	
		BARRICADE	2449	
		BITTERBUSH	2450	
		C3-S-33A TYPE	2451	
		(CONVERTED)		
		C4-S-66A TYPE	2452	
		C4-S-69B TYPE	2453	
		C4-S-A3 TYPE	2454	
		C5-S-75A TYPE	2455	
		CHULYM	2456	
		CPL LOUIS J HAUGE JR	2457	
		DINGHAI	2458	
		DONBA SS	2459	
		FS DESIGN 330	2460	
		GALATI	2461	
		HONGQI	2462	
		ISLES	2463	
		KANARYA	2464	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		KOLOMNA	2465	
		LENINGRADSKY KOMSOMOLETS	2466	
		LSIL	2467	
		NEON ANTONOV	2468	
		NORWALK	2469	
		PT-61	2470	
		SGT MATEJ KOCAK	2471	
		THROSK	2472	
		TREE	2473	
		YANHANG	2474	
		YUNYY PARTIZAN	2475	
		UNDEFINED	2476 THROUGH 2521	
		AKL GENERAL	2522	
		ELTANIN	2523	
		KEYLA	2524	
		UNDEFINED	2525	
		LENTA	2526	
		UNDEFINED	2527	
		MP 4	2528	
		MP 6	2529	
		MUNA	2530	
		SEKSTAN	2531	
		TELNOVSK	2532	
		WISTING	2533	
		GORGONA	2534	
		UNDEFINED	2535 THROUGH 2549	
		AKR GENERAL	2550	
		ALGOL (SL 7)	2551	
		CALLAGHAN	2552	
		COMET	2553	
		METEOR	2554	
		DISUSED	2555	
		MAINE (CONVERTED)	2556	
		UNDEFINED	2557 THROUGH 2566	
		AFS GENERAL	2567	
		FORT	2568	
		UNDEFINED	2569	
		MARS	2570	
		RESOURCE	2571	
		UNDEFINED	2572 THROUGH 2580	
		AOE GENERAL	2581	
		SACRAMENTO	2582	

FIELD CODING FOR J12.7C2

(SHEET 54)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		SAGAMI	2583	
		UNDEFINED	2584 THROUGH 2593	
		AD GENERAL	2594	
		YELLOWSTONE	2595	
		SAMUEL GOMPERS	2596	
		DIXIE	2597	
		STALWART	2598	
		UNDEFINED	2599 THROUGH 2608	
		AWW GENERAL	2609	
		UNDEFINED	2610 THROUGH 2619	
		AH GENERAL	2620	
		HAVEN	2621	
		OB	2622	
		DISUSED	2623	
		UNDEFINED	2624 THROUGH 2632	
		AGB GENERAL	2633	
		DOBRYNYA NIKITICH	2634	
		HANSE	2635	
		IVANSUSANIN	2636	
		SHIRASE	2637	
		YANHA	2638	
		UNDEFINED	2639 THROUGH 2648	
		AGBL GENERAL	2649	
		EISVOGEL (TYPE 721)	2650	
		DISUSED	2651	
		UNDEFINED	2652 THROUGH 2661	
		AGI GENERAL	2662	
		ALPINIST	2663	
		ARMINZA	2664	
		UNDEFINED	2665	
		BALZAM	2666	
		BOLOGOE	2667	
		DISUSED	2668	
		HAM	2669	
		DISUSED	2670	
		DISUSED	2671	
		LENTRA	2672	
		MAYAK	2673	
		MIRNY	2674	
		MOMA	2675	
		NIKOLAY ZUBOV	2676	
		OKEAN	2677	

5.2-1063

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 55)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		DISUSED	2678	
		PAMIR	2679	
		PRIMORYE	2680	
		ALSTER (TYPE 423)	2681	
		UNDEFINED	2682	THROUGH 2705
		ALS GENERAL	2706	
		UNDEFINED	2707	THROUGH 2716
		AEM GENERAL	2717	
		AMGA	2718	
		ANDIZHAN (MODIFIED)	2719	
		LAMA	2720	
		MALINA	2721	
		MELITOPOL	2722	
		MP 6	2723	
		UNDEFINED	2724	THROUGH 2733
		AGM GENERAL	2734	
		AGM-24	2735	
		GEN HOYT S VANDENBERG	2736	
		OBSERVATION ISLAND	2737	
		RANGE SENTINEL	2738	
		(HASKELL TYPE)		
		REDSTONE	2739	
		UNDEFINED	2740	THROUGH 2749
		AGOR GENERAL	2750	
		ABKHAZIYA	2751	
		AKADEMIK KRYLOV	2752	
		ARAD	2753	
		BALIKPAPAN	2754	
		BELGICA	2755	
		DISUSED	2756	
		COOK	2757	
		D'ENTRECASTEAUX	2758	
		DOBRYNYA NIKITICH	2759	
		DONG MING	2760	
		ELTANIN	2761	
		ENDEAVOR	2762	
		FRANCESCO NULLO	2763	
		DISUSED	2764	
		GRIGORE ANTIPA	2765	
		GYRE	2766	
		HAYES	2767	
		HECLA	2768	

5.2-1064

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 56)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	
		MELVILLE	2769	
		MSC 60	2770	
		NAUTILUS	2771	
		NEVELSKOY	2772	
		NIKOLAY ZUBOV	2773	
		PITHEAS	2774	
		POLYUS	2775	
		QUEST	2776	
		ROBERT D CONRAD	2777	
		T-43	2778	
		TRITON	2779	
		TUI	2780	
		TYDEMAN	2781	
		XIANG YANG HONG	2782	
		YANLUN	2783	
		YUG	2784	
		ZENOBE GRAMME	2785	
		MAYAK	2786	
		UNDEFINED	2787 THROUGH 2823	
		AGOB GENERAL	2824	
		POLARSTERN	2825	
		UNDEFINED	2826 THROUGH 2835	
		AGOS GENERAL	2836	
		UNDEFINED	2837 THROUGH 2845	
		AO GENERAL	2846	
		UNDEFINED	2847	
		AKAR	2848	
		ALBAY BURBAK	2849	
		ALTAY	2850	
		UNDEFINED	2851	
		BASKUNCHAK	2852	
		BAYLEAF	2853	
		BINBASI GURGAN	2854	
		DISUSED	2855	
		CIMARRON	2856	
		CIMARRON (JUMBOISED)	2857	
		DORA	2858	
		HAMANA	2859	
		DISUSED	2860	
		DISUSED	2861	
		HENRY J KAISER	2862	
		IRTYSH	2863	

FIELD CODING FOR J12.7C2

(SHEET 57)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		KALININGRADNEFT	2864	
		KHOBI	2865	
		KONDA	2866	
		METTAWEE	2867	
		MISPILLION (JUMBOISED)	2868	
		MOSKIT	2869	
		NEOSHO	2870	
		NERCHA	2871	
		NORWEGIAN BOW	2872	
		OLEKMA	2873	
		PATAPSCO	2874	
		PEVEK	2875	
		UNDEFINED	2876	
		SOFIYA	2877	
		SPESSART (TYPE 704A)	2878	
		TASKIZAK	2879	
		USEDOM	2880	
		WALCHENSEE (TYPE 703)	2881	
		WAVE	2882	
		DISUSED	2883	
		YUZBASI TOLUNAY	2884	
		BRAMBLELEAF	2885	
		UNDEFINED	2886	THROUGH 2936
		AOT GENERAL	2937	
		AMERICAN EXPLORER	2938	
		AOTL	2939	
		EBANOL	2940	
		FULIN	2941	
		FUZHOU	2942	
		GUANZGHOU	2943	
		LEIZHOU	2944	
		MAUMEE	2945	
		METTAWEE	2946	
		MISSION	2947	
		POTOMOC	2948	
		SEALIFT	2949	
		SUAMICO	2950	
		T 5 TYPE	2951	
		TM2	2952	
		PORT VENDRES	2953	
		UNDEFINED	2954	THROUGH 2973
		AOTL GENERAL	2974	

FIELD CODING FOR J12.7C2

(SHEET 58)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1 -----	(CONTINUED)	
		DISUSED	2975	
		KHOBI	2976	
		UNDEFINED	2977 THROUGH 2986	
		AOR GENERAL	2987	
		BANDAR ABBAS	2988	
		BEREZINA	2989	
		BORIS CHILIKIN	2990	
		CAPITAN OLA PANTOJA	2991	
		DEEPAK	2992	
		DUBNA	2993	
		DURANCE	2994	
		FUQING	2995	
		KAZBEK	2996	
		KHARG	2997	
		MEERSBURG (TYPE 701C)	2998	
		MESAR	2999	
		OLWEN	3000	
		POOLSTER	3001	
		POLYARNIK	3002	
		PROTECTEUR	3003	
		PROVIDER	3004	
		ROVER	3005	
		SAO GABRIEL	3006	
		STROMBOLI	3007	
		TIDE (IMPROVED)	3008	
		UDA	3009	
		WICHITA	3010	
		FORT VICTORIA	3011	
		BERLIN (TYPE 702C)	3012	
		UNDEFINED	3013 THROUGH 3042	
		AORL GENERAL	3043	
		LEIZHOU	3044	
		UNDEFINED	3045 THROUGH 3054	
		AOL GENERAL	3055	
		PUNARUU	3056	
		UNDEFINED	3057 THROUGH 3065	
		AGP GENERAL	3066	
		GRAHAM COUNTY	3067	
		NORGE	3068	
		DISUSED	3069	
		MERCUUR	3070	
		UNDEFINED	3071 THROUGH 3079	

FIELD CODING FOR J12.7C2

(SHEET 59)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		AP GENERAL	3080	
		MIKHAIL KALININ	3081	
		PANDORA	3082	
		QIONGSHA	3083	
		UNDEFINED	3084	THROUGH 3093
		AGR GENERAL	3094	
		UNDEFINED	3095	THROUGH 3104
		AOSR GENERAL	3105	
		UNDEFINED	3106	THROUGH 3115
		AR GENERAL	3116	
		ACHELOUS	3117	
		AJAX	3118	
		AMPHION	3119	
		AMUR	3120	
		ARL I	3121	
		DALIANG	3122	
		DILIGENCE	3123	
		DIXIE	3124	
		JULES VERNE	3125	
		OSKOL	3126	
		RHIN	3127	
		STALWART	3128	
		UNDEFINED	3129	THROUGH 3145
		ARL GENERAL	3146	
		ARCHELOUS	3147	
		UNDEFINED	3148	THROUGH 3157
		AGE GENERAL	3158	
		BELGICA	3159	
		BERRY	3160	
		UNDEFINED	3161	
		COMMANDANT RIVIERE	3162	
		DESNA	3163	
		DOBRYNYA NIKITICH	3164	
		EF 3	3165	
		HENRI POINCARE	3166	
		ILE D'OLERON	3167	
		IVANSUSANIN	3168	
		KOLOMNA	3169	
		LENTRA	3170	
		MARSHAL NEDELIN	3171	
		MOMA	3172	
		MP-8	3173	

FIELD CODING FOR J12.7C2

(SHEET 60)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		MUNA	3174	
		NARVIK	3175	
		OS-3	3176	
		POINT LOMA	3177	
		POTOK	3178	
		QUARTO	3179	
		SASHA	3180	
		SIBIR	3181	
		SO-1	3182	
		T-43	3183	
		TRITON	3184	
		DISUSED	3185	
		YAL 01	3186	
		YANXI	3187	
		ROSSETTI	3188	
		DENTI	3189	
		MONGE	3190	
		UNDEFINED	3191 THROUGH 3227	
		ARS GENERAL	3228	
		BOLSTER	3229	
		DISUSED	3230	
		INGUL	3231	
		KATUN I	3232	
		KATUN II	3233	
		KOWAN	3234	
		LSIL 351	3235	
		MIKHAIL RUDNITSKY	3236	
		OREL	3237	
		PAMIR	3238	
		PIAST	3239	
		PROTEO	3240	
		PS-11	3241	
		SAFEGUARD	3242	
		SILVA	3243	
		SPASILAC	3244	
		DISUSED	3245	
		US 149 FT	3246	
		YANDING	3247	
		UNDEFINED	3248 THROUGH 3273	
		ARSD GENERAL	3274	
		UNDEFINED	3275 THROUGH 3284	
		ASVR GENERAL	3285	

FIELD CODING FOR J12.7C2 (SHEET 61)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		UNDEFINED	3286 THROUGH 3295	
		AOS GENERAL	3296	
		ALATNA	3297	
		LUZA	3298	
		URAL	3299	
		VALA	3300	
		TONTI	3301	
		UNDEFINED	3302 THROUGH 3311	
		AF GENERAL	3312	
		CROITOR	3313	
		DANLIN	3314	
		MAYAK	3315	
		RIEGEL	3316	
		UNDEFINED	3317 THROUGH 3326	
		AKS GENERAL	3327	
		UNDEFINED	3328 THROUGH 3337	
		AKSL GENERAL	3338	
		UNDEFINED	3339 THROUGH 3348	
		AFL GENERAL	3349	
		UNDEFINED	3350 THROUGH 3359	
		ASR GENERAL	3360	
		ANTEO	3361	
		CHANTICLEER	3362	
		DAHIANG	3363	
		DALANG	3364	
		ELBRUS	3365	
		FEHMARN (TYPE 720B)	3366	
		FUSHIMI	3367	
		GALATI	3368	
		HUDONG	3369	
		KURTARAN	3370	
		NEPA	3371	
		PIGEON	3372	
		PRUT	3373	
		ROSLAVL	3374	
		SPASILAC	3375	
		VALDAY	3376	
		ZHONGHUA	3377	
		UNDEFINED	3378 THROUGH 3401	
		AS GENERAL	3402	
		ACHELOUS	3403	
		AEGIR	3404	

FIELD CODING FOR J12.7C2

(SHEET 62)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1 -----	(CONTINUED)	
		DISUSED	3405	
		ATREK	3406	
		CHIYODA	3407	
		DADONG	3408	
		DAZHOU	3409	
		DIVER	3410	
		DNEPR	3411	
		DNEPR (MODIFIED)	3412	
		DON	3413	
		EMORY S LAND	3414	
		FULTON	3415	
		HUNLEY	3416	
		L Y SPEAR	3417	
		PROTEUS	3418	
		DISUSED	3419	
		SIMON LAKE	3420	
		UGRA	3421	
		UNDEFINED	3422 THROUGH 3447	
		ASL GENERAL	3448	
		UNDEFINED	3449 THROUGH 3458	
		AGS GENERAL	3459	
		AGS 39 CLASS	3460	
		AKASHI	3461	
		ALMEIDA CARVALHO	3462	
		AMMIRAGLIO MAGNAGHI	3463	
		ANDRIJA MOHOROVICIC	3464	
		AUK	3465	
		BIYA	3466	
		BOLOGUE	3467	
		UNDEFINED	3468	
		BUYSKES	3469	
		C4-S-A1 TYPE (CONVERTED)	3470	
		CHAUVENET	3471	
		COOK	3472	
		DING HAI	3473	
		FINIK	3474	
		FS DESIGN 330	3475	
		FUTAMI	3476	
		HAMASHIO	3477	
		HEIYO	3478	
		KAIBOKAN I	3479	
		KAIYO	3480	

5.2-1071

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 63)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1 -----	(CONTINUED)	
		KAMENKA	3481	
		DISUSED	3482	
		UNDEFINED	3483	
		L'ESPERANCE	3484	
		UNDEFINED	3485	
		LENTRA	3486	
		LSIL	3487	
		MEIYO	3488	
		MELITOPOL	3489	
		MOMA	3490	
		MONOWAI	3491	
		MORESBY	3492	
		MP-8	3493	
		MSC-294 (BLUEBIRD)	3494	
		NYRYAT I	3495	
		NYRYAT II	3496	
		SAMARA	3497	
		SHOYO	3498	
		SILAS BENT	3499	
		STERNE	3500	
		SUMA	3501	
		T-43	3502	
		TAKUYO	3503	
		TELNOVSK	3504	
		TELNOVSK (MODIFIED)	3505	
		TENYO	3506	
		VICTORY (CONVERTED)	3507	
		WILKES	3508	
		YANLAI	3509	
		YANXU	3510	
		MIRTO	3511	
		MARS	3512	
		LAPEROUSE	3513	
		UNDEFINED	3514 THROUGH 3579	
		AGSA GENERAL	3580	
		UNDEFINED	3581 THROUGH 3590	
		AGSC GENERAL	3591	
		EXPLORER	3592	
		FLINDERS	3593	
		TAINO	3594	
		BULLDOG	3595	
		ROEBUCK	3596	

5.2-1072

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 64)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		UNDEFINED	3597 THROUGH 3604	
		AX GENERAL	3605	
		ARIS	3606	
		DISUSED	3607	
		JADRAN	3608	
		JERVIS BAY	3609	
		JOSE MARTI	3610	
		MP-8	3611	
		SMOLNY	3612	
		UGRA	3613	
		VIETNAM HEROICO	3614	
		WODNIK	3615	
		UNDEFINED	3616 THROUGH 3630	
		AXL GENERAL	3631	
		UNDEFINED	3632	
		LEOPARD	3633	
		MAYAK	3634	
		UNDEFINED	3635 THROUGH 3642	
		AXS GENERAL	3643	
		AMERIGO VESPUCCI	3644	
		CAROLY	3645	
		CARSARO II	3646	
		GORCH FOCK (TYPE 441A)	3647	
		MIRCEA	3648	
		PALINURO	3649	
		SAGRES	3650	
		STELLA POLARE	3651	
		UNDEFINED	3652 THROUGH 3659	
		AT GENERAL	3660	
		UNDEFINED	3661 THROUGH 3665	
		ATA GENERAL	3666	
		ABNAKI	3667	
		APACHE	3668	
		ARMY 254	3669	
		ATAK	3670	
		ATLANTE	3671	
		AZUMA	3672	
		BELIER	3673	
		UNDEFINED	3674	
		GAJ	3675	
		GNIEWKO	3676	
		GORYN	3677	

5.2-1073

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 65)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		GROMOVOY	3678	
		KUDRET	3679	
		MAITO	3680	
		MB-31	3681	
		MB-65	3682	
		MOTYL	3683	
		OKHTENSKIY	3684	
		ONCU	3685	
		POWHATAN	3686	
		ROSLAVL	3687	
		ROYSTERER	3688	
		SAINT	3689	
		SCHULTZ XAVIER	3690	
		SORUM	3691	
		TENACE	3692	
		TUZHONG	3693	
		TYPHOON	3694	
		WANGEROOGE (TYPE 722B)	3695	
		ZENIT	3696	
		MAITO	3697	
		ARMEN	3698	
		UNDEFINED	3699	THROUGH 3737
		ATR GENERAL	3738	
		TENACE	3739	
		UNDEFINED	3740	THROUGH 3748
		ATS GENERAL	3749	
		EDENTON	3750	
		OKHTENSKY	3751	
		LANGE00G (TYPE 754)	3752	
		ARGUS	3753	
		UNDEFINED	3754	THROUGH 3762
		AWT GENERAL	3763	
		UNDEFINED	3764	
		BASENTO	3765	
		FUZHOU (MODIFIED)	3766	
		KANGAN	3767	
		LEIZHOU (MODIFIED)	3768	
		LSIL	3769	
		MANYCH	3770	
		MINCIO	3771	
		PIAVE	3772	
		TEVERE	3773	

5.2-1074

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 66)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		ULUBAT	3774	
		VODA	3775	
		YW-83	3776	
		Z	3777	
		UNDEFINED	3778 THROUGH 3797	
		SERVICE CRAFT GENERAL	3798	
		BARGE, GENERAL	3799	
		YO GENERAL	3800	
		YOG GENERAL	3801	
		YHT GENERAL	3802	
		YRNS GENERAL	3803	
		YOS GENERAL	3804	
		YPK GENERAL	3805	
		YRR GENERAL	3806	
		YRB GENERAL	3807	
		YRST GENERAL	3808	
		YOM GENERAL	3809	
		YOSS GENERAL	3810	
		YW GENERAL	3811	
		UNDEFINED	3812 THROUGH 3827	
		YD GENERAL	3828	
		YM GENERAL	3829	
		YFD GENERAL	3830	
		YFP GENERAL	3831	
		YGT GENERAL	3832	
		YR GENERAL	3833	
		UNDEFINED	3834 THROUGH 3840	
		YFD GENERAL	3841	
		YFDB GENERAL	3842	
		YFDM GENERAL	3843	
		YFDL GENERAL	3844	
		UNDEFINED	3845 THROUGH 3850	
		YRD GENERAL	3851	
		YRDB GENERAL	3852	
		YRDM GENERAL	3853	
		YRDL GENERAL	3854	
		UNDEFINED	3855 THROUGH 3861	
		LIGHTER GENERAL	3862	
		YE GENERAL	3863	
		YF GENERAL	3864	
		YFC GENERAL	3865	
		YFR GENERAL	3866	

FIELD CODING FOR J12.7C2

(SHEET 67)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		YC GENERAL	3867	
		YFT GENERAL	3868	
		UNDEFINED	3869	THROUGH 3878
		YT GENERAL	3879	
		YTB GENERAL	3880	
		YTM GENERAL	3881	
		YTL GENERAL	3882	
		UNDEFINED	3883	THROUGH 3892
		YAGF GENERAL	3893	
		YAG GENERAL	3894	
		YV GENERAL	3895	
		YNG GENERAL	3896	
		YP GENERAL	3897	
		YFU GENERAL	3898	
		YAM GENERAL	3899	
		YNC GENERAL	3900	
		YLC GENERAL	3901	
		YVS GENERAL	3902	
		YRG GENERAL	3903	
		YAGT GENERAL	3904	
		YPT GENERAL	3905	
		YRC GENERAL	3906	
		YDT GENERAL	3907	
		YNT GENERAL	3908	
		YH GENERAL	3909	
		YFB GENERAL	3910	
		YTR GENERAL	3911	
		YFL GENERAL	3912	
		YAC GENERAL	3913	
		YSR GENERAL	3914	
		YSG GENERAL	3915	
		YDG GENERAL	3916	
		KHABAROV	3917	
		UNDEFINED	3918	THROUGH 3936
		TM GENERAL	3937	
		TMD GENERAL	3938	
		TMB GENERAL	3939	
		TMK GENERAL	3940	
		TMF GENERAL	3941	
		TMC GENERAL	3942	
		TMCS GENERAL	3943	
		TMWW GENERAL	3944	

FIELD CODING FOR J12.7C2

(SHEET 68)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1	(CONTINUED)	

		TMA GENERAL	3945	
		TMH GENERAL	3946	
		TMGB GENERAL	3947	
		TMI GENERAL	3948	
		TML GENERAL	3949	
		TMOT GENERAL	3950	
		TMM GENERAL	3951	
		TMP GENERAL	3952	
		TMFR GENERAL	3953	
		TMR GENERAL	3954	
		TMOR GENERAL	3955	
		TMOL GENERAL	3956	
		TME GENERAL	3957	
		TMGS GENERAL	3958	
		TMLS GENERAL	3959	
		TMS GENERAL	3960	
		TMOS GENERAL	3961	
		TMO GENERAL	3962	
		TMX GENERAL	3963	
		TMWT GENERAL	3964	
		UNDEFINED	3965 THROUGH 3989	
		TMT GENERAL	3990	
		TMTR GENERAL	3991	
		TMTS GENERAL	3992	
		UNDEFINED	3993 THROUGH 4002	
		TU GENERAL	4003	
		TUF GENERAL	4004	
		TUB GENERAL	4005	
		TUI GENERAL	4006	
		TUR GENERAL	4007	
		TUT GENERAL	4008	
		TUS GENERAL	4009	
		TUC GENERAL	4010	
		TUW GENERAL	4011	
		UNDEFINED	4012 THROUGH 4023	
		TJ GENERAL	4024	
		TJF GENERAL	4025	
		TJC GENERAL	4026	
		TJCS GENERAL	4027	
		TJGB GENERAL	4028	
		UNDEFINED	4029 THROUGH 4038	
		TS GENERAL	4039	

5.2-1077

MIL-STD-6016B

FIELD CODING FOR J12.7C2 (SHEET 69)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	002	SURFACE (MARITIME) AMBIGUOUS TYPE 1 -----	(CONTINUED)	
		TSG GENERAL	4040	
		TSR GENERAL	4041	
		UNDEFINED	4042 THROUGH 4052	
		MPS GENERAL	4053	
		UNDEFINED	4054 THROUGH 4069	
		SURFACE SPECIFIC TYPE 1-25	4070 THROUGH 4094	
		RESET TO NO STATEMENT	4095	
809	002	SUBSURFACE (MARITIME) AMBIGUOUS TYPE 1 -----		IDENTIFIES THE TARGET SPECIFIC TYPE AS DETERMINED BY AN ONBOARD CORRELATION PROCESS IF THERE ARE NO AMBIGUITIES. IDENTIFIES THE MOST PROBABLE TARGET SPECIFIC TYPE IF AN ONBOARD CORRELATION PROCESS DETERMINED THAT THE SPECIFIC TYPE IS AMBIGUOUS. INFORMATION IN THIS FIELD SHALL BE DERIVED ONLY FROM ONBOARD SOURCES AS OPPOSED TO DATA LINK SOURCES.
		NO STATEMENT	0	
		SS GENERAL	1	
		ABTAO SS	2	
		DISUSED	3	
		DISUSED	4	
		UNDEFINED	5	
		DISUSED	6	
		GUPPY II SS	7	
		GUPPY IIA SS	8	
		GUPPY III SS	9	
		HAI LUNG SS	10	
		DISUSED	11	
		SAURO (TYPE 1081) SS	12	
		SAURO (IMPROVED) SS	13	
		TANG SS	14	
		TYPE SNA 72 SS	15	
		UZUSHIO SS	16	
		WALRUS SS	17	
		YUUSHIO SS	18	
		UNDEFINED	19	
		DISUSED	20	

FIELD CODING FOR J12.7C2

(SHEET 70)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
809	002	SUBSURFACE (MARITIME) AMBIGUOUS TYPE 1 -----	(CONTINUED)	
		PELOSI SS	21	
		UNDEFINED	22 THROUGH 360	
		SSB GENERAL	361	
		GOLF SSB	362	
		GOLF II SSB	363	
		GOLF III SSB	364	
		GOLF V SSB	365	
		UNDEFINED	366 THROUGH 440	
		SSBN GENERAL	441	
		BENJAMIN FRANKLIN SSBN	442	
		DELTA I SSBN	443	
		DELTA II SSBN	444	
		DELTA III SSBN	445	
		DELTA IV SSBN	446	
		HOTEL III SSBN	447	
		DISUSED	448	
		L'INFLEXIBLE SSBN	449	
		DISUSED	450	
		UNDEFINED	451	
		OHIO SSBN	452	
		RESOLUTION SSBN	453	
		TYPHOON SSBN	454	
		VANGUARD SSBN	455	
		YANKEE SSBN	456	
		YANKEE I SSBN	457	
		YANKEE II SSBN	458	
		XIA SSBN	459	
		LE TERRIBLE SSBN	460	
		UNDEFINED	461 THROUGH 720	
		SSN GENERAL	721	
		AKULA SSN	722	
		ALFA SSN	723	
		AMATHEPT SSN	724	
		CHARLIE/VICTOR SSGN/SSN	725	
		CHURCHILL SSN	726	
		ECHO/NOVEMBER SSGN/SSN	727	
		DISUSED	728	
		DISUSED	729	
		HAN SSN	730	
		HOTEL SSN	731	
		LOS ANGELES SSN	732	
		MIKE SSN	733	

5.2-1079

MIL-STD-6016B

FIELD CODING FOR J12.7C2 (SHEET 71)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
809	002	SUBSURFACE (MARITIME) AMBIGUOUS TYPE 1 -----	(CONTINUED)	
		NARWHAL SSN	734	
		DISUSED	735	
		RUBIS SSN	736	
		SEAWOLF SSN	737	
		SIERRA SSN	738	
		DISUSED	739	
		DISUSED	740	
		STURGEON SSN	741	
		SWIFTSURE SSN	742	
		TRAFALGAR SSN	743	
		DISUSED	744	
		VICTOR I SSN	745	
		VICTOR II SSN	746	
		VICTOR III SSN	747	
		YANKEE SSN	748	
		VIRGINIA SSN	749	
		UNDEFINED	750 THROUGH 1200	
		SSG GENERAL	1201	
		JULIETT SSG	1202	
		UNDEFINED	1203 THROUGH 1245	
		SSGN GENERAL	1246	
		CHARLIE I SSGN	1247	
		CHARLIE II SSGN	1248	
		ECHO II SSGN	1249	
		OSCAR SSGN	1250	
		PAPA SSGN	1251	
		UNDEFINED	1252 THROUGH 1345	
		SSK GENERAL	1346	
		AGOSTA SSK	1347	
		UNDEFINED	1348	
		FOXTROT SSK	1349	
		HEROJ SSK	1350	
		KILO SSK	1351	
		MING SSK	1352	
		NARVAL SSK	1353	
		DISUSED	1354 THROUGH 1355	
		ROMEO SSK	1356	
		SAVA SSK	1357	
		SUTJESKA SSK	1358	
		TANGO SSK	1359	
		UPHOLDER SSK	1360	
		WHISKEY SSK	1361	

FIELD CODING FOR J12.7C2

(SHEET 72)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
809	002	SUBSURFACE (MARITIME) AMBIGUOUS TYPE 1 -----	(CONTINUED)	
		WHISKEY V SSK	1362	
		ZULU IV SSK	1363	
		DORIS SSK	1364	
		VICTORIA SSK	1365	
		TYPE 212 SSK	1366	
		UNDEFINED	1367 THROUGH 1665	
		SSC GENERAL	1666	
		DELFINEN SSC	1667	
		DRAKEN SSC	1668	
		NAECKEN SSC	1669	
		NARHVALEN SSC	1670	
		SJOORMEN SSC	1671	
		TOTI TYPE 1075 SSC	1672	
		TYPE 205 SSC	1673	
		TYPE 206 SSC	1674	
		KOBVEN SSC	1675	
		TYPE 209 (TYPE 1100) SSC	1676	
		TYPE 209 (TYPE 1200) SSC	1677	
		TYPE 209 (TYPE 1300) SSC	1678	
		TYPE 209 (TYPE 1400) SSC	1679	
		TYPE 209 (TYPE 1500) SSC	1680	
		ULA SSC	1681	
		TYPE 211 SSC	1682	
		VASTERGOETLAND SSC	1683	
		TYPE 206A SSC	1684	
		UNDEFINED	1685 THROUGH 1945	
		SSA GENERAL	1946	
		BRAVO SSA	1947	
		DOLPHIN (AGSS) SSA	1948	
		GOLF I SSA	1949	
		GOLF I (MODIFIED) SSA	1950	
		GOLF II SSA	1951	
		INDIA SSA	1952	
		LIMA SSA	1953	
		ROMEO SSA	1954	
		ZULU SSA	1955	
		UNDEFINED	1956 THROUGH 4069	
		SUBSURFACE SPECIFIC	4070 THROUGH 4094	
		TYPE 1-25		
		RESET TO NO STATEMENT	4095	

5.2-1081

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 73)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	002	LAND (GROUND) AMBIGUOUS TYPE 1 -----		IDENTIFIES THE TARGET SPECIFIC TYPE AS DETERMINED BY AN ONBOARD CORRELATION PROCESS IF THERE ARE NO AMBIGUITIES. IDENTIFIES THE MOST PROBABLE TARGET SPECIFIC TYPE IF AN ONBOARD CORRELATION PROCESS DETERMINES THAT THE SPECIFIC TYPE IS AMBIGUOUS. INFORMATION IN THIS FIELD SHALL BE DERIVED ONLY FROM ONBOARD SOURCES AS OPPOSED TO DATA LINK SOURCES.
		NO STATEMENT	0	
		TOW	1	
		DRAGON	2	
		LANCE	3	
		SHILLEAGH	4	
		SERGEANT	5	
		AMMUNITION	6	
		POL	7	
		OBSERVATION POSTS	8	
		RADIO DIRECTION FINDER	9	
		RIVER	10	
		STREAM	11	
		LAKE	12	
		MARSH/SWAMP	13	
		MOUNTAIN	14	
		HILLTOP	15	
		RIDGE	16	
		DEPRESSION	17	
		VALLEY	18	
		CAVE	19	
		BRIDGE	20	
		DAM	21	
		BUILDING	22	
		VILLAGE	23	
		TOWN	24	
		ROAD INTERSECTION	25	
		HOSPITAL	26	
		HAWK	27	
		I-HAWK	28	
		PATRIOT	29	
		NIKE	30	
		REDEYE	31	
		STINKER	32	

5.2-1082

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 74)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	002	LAND (GROUND) AMBIGUOUS TYPE 1 (CONTINUED)		
		HELLFIRE	33	
		PERSHING	34	
		JEEP	35	
		CAR	36	
		MOTORCYCLE	37	
		BICYCLE	38	
		AMPHIBIOUS VEHICLE	39	
		RIVER CROSSING EQUIPMENT	40	
		MECHANIZED MINE SWEEPER	41	
		MOBILE RADAR	42	
		SMOKE GENERATOR	43	
		(SSSB) SHIP SHORE SHIP	44	
		BUFFER		
		(RADIL) ROCC AWACS	45	
		DIGITAL INTERFACE LINK		
		(ASIT) ADAPTABLE SURFACE	46	
		INTERFACE TERMINAL		
		(AEGIS) AEW GROUND	47	
		INTERFACE SEGMENT		
		AMBULANCE	48	
		BIOLOGICAL WEAPONS	49	
		CHEMICAL WEAPONS	50	
		NUCLEAR WEAPONS	51	
		ENGINEER VEHICLES	52	
		GENERATOR	53	
		JAMMERS	54	
		MAINTENANCE VEHICLE	55	
		MULTIPLE ROCKET LAUNCHER	56	
		RADIO	57	
		REMOTE SENSOR	58	
		SELF PROPELLED ARTILLERY	59	
		TACTICAL BRIDGE	60	
		TOWED ARTILLERY GUN	61	
		RECOILLESS RIFLE	62	
		(TACCP) TACTICAL COMMAND	63	
		POST		
		BRIGADE	64	
		CORPS	65	
		GROUP	66	
		DIVISION	67	
		REGIMENT	68	
		BATTALION	69	
		COMPANY	70	

5.2-1083

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 75)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	002	LAND (GROUND) AMBIGUOUS TYPE 1 (CONTINUED)		

		PLATOON	71	
		SQUADRON	72	
		AIRBASE	73	
		WING	74	
		ANTI-AIRCRAFT GUN	75	
		AIR DEFENSE ARTILLERY	76	
		GUN		
		MORTAR	77	
		FLAMETHROWER	78	
		TSC/MOCC/MARITIME	79	
		HEADQUARTERS		
		MAIN BATTLE TANK	80	
		MEDIUM TANK	81	
		LIGHT TANK	82	
		TRAIN	83	
		ARMORED PERSONNEL	84	
		VEHICLE		
		ARMORED INFANTRY	85	
		FIGHTING VEHICLE		
		LIGHT TRUCK	86	
		MEDIUM TRUCK	87	
		HEAVY TRUCK	88	
		TANK TRANSPORTER	89	
		DUMMY	90	
		TRAP	91	
		POINT TARGET	92	
		EA SITE	93	
		ARMORED PERSONNEL	94	
		CARRIER		
		ARMORED INFANTRY	95	
		FIGHTING VEHICLE		
		GCI SITE	96	
		CRC	97	
		TACC (AF)	98	
		CRP	99	
		TACC (MC)	100	
		MPC	101	
		TAOC	102	
		AADCCS (AN/TSQ-73)	103	
		DASC	104	
		FACP	105	
		FASC	106	
		AADCP	107	

5.2-1084

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 76)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	002	LAND (GROUND) AMBIGUOUS TYPE 1 (CONTINUED)		

		ASRT	108	
		NCC	109	
		RCC	110	
		ROCC	111	
		DC	112	
		WOC	113	
		(ASOC) AIR SUPPORT	114	
		OPERATIONS CENTER		
		(TCO) TACTICAL COMBAT	115	
		OPERATIONS CENTER		
		(TOC) TACTICAL	116	
		OPERATIONS CENTER		
		(ARMY)		
		CHAPPARAL	117	
		FIRE DIRECTION CENTER	118	
		FIRE UNIT	119	
		DIVARTY	120	
		BATTERY	121	
		SELF-PROPELLED ARTILLERY	122	
		(GOC) GROUND OPERATIONS	123	
		CENTER		
		(ICC) INFORMATION	124	
		COORDINATION CENTER		
		(BOC) BATTERY OPERATIONS	125	
		CENTER		
		(ECS) ENGAGEMENT CONTROL	126	
		STATION		
		(PCP) PLATOON COMMAND	127	
		POST		
		(CRG) COMMUNICATIONS	128	
		RELAY GROUP		
		TUNNELS	129	
		RAILYARDS	130	
		BENCHMARK	131	
		TROOP	132	
		LANDING ZONE	133	
		DROP ZONE	134	
		ASSEMBLY OR STAGING AREA	135	
		DECONTAMINATION SITE	136	
		RE-ENTRY POINT/LINE	137	
		CROSSING AREA FOR		
		RECON PATROLS		
		SAM	138	

5.2-1085

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 77)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	002	LAND (GROUND) AMBIGUOUS TYPE 1 (CONTINUED)		
		SSM	139	
		ANTI-TANK WEAPON	140	
		DIRECT SUPPORT	141	
		GENERAL SUPPORT	142	
		INTERCEPTION	143	
		BLOCKING	144	
		REINFORCING	145	
		REDEPLOYMENT	146	
		POLICING	147	
		INTRUDING	148	
		PREPARING BARRIER	149	
		DUMPING EQUIPMENT	150	
		RELIEF	151	
		CONVOY	152	
		ANTI-AIRCRAFT	153	
		AIR DEFENSE ARTILLERY	154	
		ARTILLERY	155	
		SURVEILLANCE	156	
		PICKETING	157	
		LOGISTICS SUPPORT	158	
		SEARCH	159	
		DIRECT ARTILLERY SUPPORT	160	
		GENERAL ARTILLERY	161	
		SUPPORT		
		MAINTAINING LINE OF	162	
		COMMUNICATION		
		COMMITTING	163	
		COUNTER-ATTACK	164	
		ELECTRONIC WARFARE	165	
		THREATEN	166	
		DESTROY	167	
		CONTACT	168	
		EVALUATION	169	
		TRANSPORTER	170	
		ARMORED VEHICLE	171	
		GUN	172	
		HALF TRACK	173	
		COMMUNICATIONS EQUIPMENT	174	
		TARGET	175	
		AIR DEFENSE SITE	176	
		FIM-92 STINGER	177	
		NIM-23 HAWK	178	
		MIM-42 REDEYE	179	

FIELD CODING FOR J12.7C2

(SHEET 78)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	002	LAND (GROUND) AMBIGUOUS TYPE 1 (CONTINUED)		
		MIM-72 CHAPARRAL	180	
		MIM-104 PATRIOT	181	
		RIM-2 TERRIER	182	
		RIM-7 SEA SPARROW	183	
		RIM-8 TALOS	184	
		RIM-24 TARTAR	185	
		RIM-66 STANDARD MISSILE	186	
		RIM-67 STANDARD MISSILE	187	
		BLOWPIPE	188	
		DISUSED	189	THROUGH 190
		SEA DART	191	
		DISUSED	192	THROUGH 193
		CROTALE	194	
		RAPIER	195	
		RBS-70/GIRAFFE	196	
		SAM BLOODHOUND	197	
		SAM ROLAND	198	
		SA-2 GUIDELINE	199	
		SA-3 GOA	200	
		SA-4 GANEF	201	
		SA-N-3 GOBLET	202	
		SA-5 GAMMON	203	
		SA-N-4 GECKO	204	
		SA-6 GAINFUL	205	
		SA-N-6 GRUMBLE	206	
		SA-7 GRAIL	207	
		SA-8 GECKO	208	
		SA-9 GASKIN	209	
		SA-10 GRUMBLE	210	
		SA-11 GADFLY	211	
		SA-12	212	
		SA-13 GOPHER	213	
		MISTRAL	214	
		SA-N-7 GADFLY	215	
		SA-N-8 GREMLIN	216	
		SA-14 GREMLIN	217	
		SA-16 GIMLET	218	
		SA-X-17	219	
		TOC (THAAD)	220	
		SSI (THAAD)	221	
		LCS (THAAD)	222	
		LAUNCHER (THAAD)	223	
		TMD-GBR (THAAD)	224	

5.2-1087

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 79)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	002	LAND (GROUND) AMBIGUOUS TYPE 1 (CONTINUED)		

		JTAGS	225	
		ADTOC/BN	226	
		ADTOC/BDE	227	
		ADCP	228	
		SM-2 BLOCK II	229	
		SM-2 BLOCK III	230	
		SM-2 BLOCK IIIA	231	
		SM-2 BLOCK IIIB	232	
		SM-2 BLOCK IV	233	
		SM-2 BLOCK IVA	234	
		SM-3 LEAP	235	
		SA-N-5 GRAIL	236	
		SA-N-11 GRISOM	237	
		SA-12A GLADIATOR	238	
		SA-12B GIANT	239	
		SA-14 GREMLIN	240	
		SA-15 GAUNTLET	241	
		SA-17 GRIZZLY	242	
		SA-N-12 GRIZZLY	243	
		SA-18 GROUSE	244	
		SA-19 GRISOM	245	
		RIM-116 RAM	246	
		ADATS	247	
		JAVELIN	248	
		STARBURST	249	
		STARSTREAK	250	
		ASPID	251	
		FRONT DOOR	252	
		ROLAND II	253	
		AKASH	254	
		ANZA	255	
		ANZA II	256	
		CSA-1	257	
		CSA-2	258	
		CSA-4	259	
		CSA-5	260	
		FM-80	261	
		HN-5	262	
		NK-7	263	
		NK-16	264	
		PANTZYR	265	
		RAPIER 2000/JERNAS	266	
		RBS-90	267	

5.2-1088

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 80)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	002	LAND (GROUND) AMBIGUOUS TYPE 1 (CONTINUED)		

		SAKR	268	
		SAVA	269	
		SHANINE	270	
		SKYGUARD ASPIDE	271	
		SPADA	272	
		TAM SAM	273	
		TIGERCAT	274	
		VANGUARD	275	
		SA-N-1 GOA	276	
		SA-N-9 GAUNTLET	277	
		SA-N-10	278	
		ALBATROS/ASPIDE	279	
		SM-1	280	
		SA-2 IRAQ MOD	281	
		SA-2 NORTH KOREA RO	282	
		AEGIS-TI	283	
		MASURGS	284	
		ROCK CAKE	285	
		SEA INDIGO	286	
		TANSAM	287	
		TOKEN A/D	288	
		GUARDSMAN	289	
		SILKWORM	290	
		SNOW DRIFT 11/17	291	
		TIGER S	292	
		TIGER G	293	
		TUBE ARM SA-11	294	
		SEACAT 262/903/904	295	
		AN/MPQ-4	296	
		AN-TPQ-36	297	
		AN/TPS-25	298	
		CYMBERLINE	299	
		PORK TROUGH 1	300	
		RASIT	301	
		SNAR-6	302	
		TALL MIKE	303	
		AN/FPN-33/36/40	304	
		AN/TPN-12/17	305	
		CPN-4, FPN-16/22	306	
		RP-2E	307	
		RP-4G	308	
		THD-1010/1013	309	
		TPN-8/14/18TSQ-7	310	

5.2-1089

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 81)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	002	LAND (GROUND) AMBIGUOUS TYPE 1 (CONTINUED)		

		TWO SPOT	311	
		CSA-X-2	312	
		ASR-0	313	
		FALCON-G	314	
		MARCON LN66TPS66	315	
		SHEET BEND	316	
		WALL RUST A/B	317	
		DON-2	318	
		DONKAY/PALM FROND	319	
		EYE SHIELD	320	
		MARELD	321	
		PEEL PAIR	322	
		POT HEAD	323	
		RACAL-DECCA	324	
		RICE FIELD	325	
		RICE SCREEN	326	
		RICE CUP	327	
		SQUARE TIE	328	
		SS-N-2	329	
		STRUT CURVE	330	
		STRUT PAIR	331	
		BOFI	332	
		CORN CAN	333	
		DRUM TILT	334	
		ELDORADO	335	
		FLAP WHEEL	336	
		FLEDERMAUS	337	
		FLYCATCHER	338	
		GEPARD	339	
		GUN DISH	340	
		SPAAMG	341	
		TEAMPLAY	342	
		TEAMWORK	343	
		VULCAN	344	
		9LV 200	345	
		AN/SPG-50	346	
		BASS TILT	347	
		GOALKEEPER	348	
		HAWK SCREECH	349	
		KITE SCREECH A/B	350	
		OWL SCREECH	351	
		MARK 68 FCS	352	
		MK 57/63 GFCS	353	

5.2-1090

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 82)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	002	LAND (GROUND) AMBIGUOUS TYPE 1 (CONTINUED)		

		MK-86 GFCS	354	
		MUFF COB	355	
		SIGNAAL STIR 180	356	
		SUN VISOR	357	
		TOP BOW	358	
		TYPE 341	359	
		VEGA	360	
		WM-20 SERIES	361	
		MARCONI S613	362	
		THIN SKIN	363	
		AN/FPS-77	364	
		MRL-1	365	
		MRL-4/5	366	
		BIG BIRD	367	
		SIDE NET	368	
		ODD LOT/PAIR/GROUP	369	
		FIRE WHEEL/MOD	370	
		BARLOCK	371	
		FIRECAN/WHIFF	372	
		GIN SLING	373	
		FRUSKA GORA	374	
		TIN SHIELD	375	
		BIG BAR/MESH	376	
		SS-N-S SCOOP PAIR	377	
		SGR-105 DA-01/00	378	
		CROSS SLOT	379	
		BACK NET/TRAP	380	
		GATE POLE/HIGH/POST	381	
		TOP LOT	382	
		RICE CAKE	383	
		JY-14/9	384	
		TIN TRAP	385	
		HEAD NET A/B/C	386	
		SLIM/SEA/HAIR NET	387	
		LOW SIEVE	388	
		EGG CUP	389	
		CUT WEB	390	
		SKYWATCH	391	
		HALF PLATE	392	
		SKIN HEAD	393	
		SIEVE FAMILY	394	
		SO-A	395	
		HIGH SHELL	396	

5.2-1091

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 83)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	002	LAND (GROUND) AMBIGUOUS TYPE 1 (CONTINUED)		
		AN/FPS-6/89	397	
		DECCA HF200	398	
		MARCONI 5244	399	
		TYPE 88 MK 1	400	
		MARCONI S-247	401	
		AN/MPN-11	402	
		RAT-31S	403	
		AA4 MK 6/7	404	
		AN/TPS-43	405	
		SCR-584	406	
		AN/TPS-48	407	
		MARCONI S-1006/269	408	
		PALMIER	409	
		FIREFINDER LR	410	
		VOLEX III/IV	411	
		THD-1940	412	
		HADR (HR-3000)	413	
		AN/RPS-70/72/75	414	
		MPDR-18/S	415	
		WATCHMAN	416	
		MARCONI S-631/647	417	
		MARCONI S-706/711/712	418	
		AN/TPS-73	419	
		TRS-22XX	420	
		AN/SPS-8	421	
		DECCA AWS-1	422	
		MK-26	423	
		AN/SPS-48	424	
		RAN-7S	425	
		SEA TIGER	426	
		DA-08/2LS	427	
		AWS-9 (TYPE 996)	428	
		DA-05/00	429	
		MPDR-45	430	
		TOP STEER/PLATE	431	
		STRIKE OUT	432	
		SPONGE CAKE	433	
		NC1 ROLAND	434	
		NC1 MISTRAL	435	
		FDOC	436	
		MCT	437	
		CETAC	438	
		ISARD	439	

5.2-1092

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 84)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

810	002	LAND (GROUND) AMBIGUOUS TYPE 1 (CONTINUED)		
-----	-----	--	--	--

		UNDEFINED	440 THROUGH 4000	
		WAYPOINT	4001	
		STRIKE INITIAL POINT	4002	
		UNDEFINED	4003 THROUGH 4093	
		RESET TO NO STATEMENT	4094	
		UNDEFINED	4095	

749	003	SPACE AMBIGUOUS TYPE 2		
-----	-----	------------------------	--	--

--	--	-------	--	--

		IDENTIFIES THE SECOND MOST PROBABLE TARGET SPECIFIED TYPE IF AN ONBOARD CORRELATION PROCESS DETERMINES THAT THE SPECIFIC TYPE IS AMBIGUOUS. INFORMATION IN THIS FIELD SHALL BE DERIVED ONLY FROM ONBOARD SOURCES AS OPPOSED TO DATA LINK SOURCES.
--	--	--

		NO STATEMENT	0	
		FROG-7	1	
		HONEST JOHN	2	
		SAKR 80	3	
		SS-21 MOD 2	4	
		SS-21 MOD 3	5	
		HAFT-I	6	
		UNDEFINED	7 THROUGH 78	
		SHORT RANGE (0-65 DM)	79	
		ALACRAN	80	
		CHENG FENG	81	
		CONDOR	82	
		HAFT II	83	
		IRAN-130	84	
		LANCE	85	
		MB/EE-150	86	
		MB/EE-300	87	
		UNDEFINED	88	
		PRITHVI	89	
		SS-1B (SCUD-A)	90	
		SS-1C (SCUD-B)	91	
		SS-21 (SCARAB)	92	
		SS-300	93	
		B-610/CJS-98 (BG510)	94	
		NHK-I	95	
		NHK-II (HYON MU)	96	
		UNDEFINED	97 THROUGH 168	

5.2-1093

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 85)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
749	003	SPACE AMBIGUOUS TYPE 2	(CONTINUED)	

		SHORT-MEDIUM RANGE	169	
		(66-200 DM)		
		AL-HUSAYN	170	
		UNDEFINED	171	
		HAFT III	172	
		M-9	173	
		M-11	174	
		MB/EE-600	175	
		SCUD-C	176	
		SS-23 (SPIDER)	177	
		AL HUSSEIN	178	
		UNDEFINED	179	THROUGH 242
		MEDIUM RANGE (201-400	243	
		DM)		
		AL-ABBAS	244	
		JERICH0-I	245	
		AL HIJARAN	246	
		SONDA IV	247	
		UNDEFINED	248	THROUGH 330
		MEDIUM-EXTENDED RANGE	331	
		(401-600 DM)		
		AL-FATAH	332	
		BADR-2000	333	
		CONDOR II	334	
		CSS-1	335	
		MB/EE-1000	336	
		SKY HORSE	337	
		SS-12A (SCALEBOARD A)	338	
		SS-12B (SCALEBOARD B)	339	
		SS1000	340	
		TIEN MA	341	
		UNDEFINED	342	THROUGH 416
		EXTENDED RANGE (601-800	417	
		DM)		
		ARNISTON	418	
		CAPRICORNIO	419	
		JERICH0 II	420	
		NODONG-1	421	
		SS-N-5 (SERB)	422	
		UNDEFINED	423	THROUGH 496
		EXTENDED-LONG RANGE	497	
		(801-1000 DM)		
		AGNI	498	

5.2-1094

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 86)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
749	003	SPACE AMBIGUOUS TYPE 2	(CONTINUED)	

		AL/ABED	499	
		CC-4 (SANDAL)	500	
		CSS-5	501	
		UNDEFINED	502 THROUGH 575	
		LONG RANGE (1001-1350 DM)	576	
		CHEVALINE	577	
		CSS-2	578	
		CSS-3	579	
		CSS-4	580	
		CSS-N-3	581	
		M-4 SLBM	582	
		M-5 SLBM	583	
		M-20 SLBM	584	
		MIDGETMAN	585	
		MINUTEMAN I	586	
		MINUTEMAN II	587	
		PEACEKEEPER	588	
		POLARIS A-3	589	
		POSEIDON C-3	590	
		SS-11 (SEGO)	591	
		SS-13 (SAVAGE)	592	
		SS-17 (SPANKER) MOD 1	593	
		SS-17 (SPANKER) MOD 2	594	
		SS-17 (SPANKER) MOD 3	595	
		SS-18 (SATAN) MOD 1	596	
		SS-18 (SATAN) MOD 2	597	
		SS-18 (SATAN) MOD 3	598	
		SS-20 (SABER)	599	
		SS-24 (SCALPEL)	600	
		SS-25 (SICKLE)	601	
		SS-N-6 (SAWFLY)	602	
		SS-N-8	603	
		SS-N-17 (SNIPE)	604	
		SS-N-18 (STINGRAY)	605	
		SS-N-20 (STURGEON)	606	
		SS-N-23 (SKIFF)	607	
		SSBS S-3	608	
		SSBS S-4	609	
		TRIDENT I (C-4)	610	
		TRIDENT II (D-5)	611	
		MODIFIED CSS-5	612	
		SS-19 MOD 3	613	

5.2-1095

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
749	003	SPACE AMBIGUOUS TYPE 2	(CONTINUED)	

		UNDEFINED	614	
		NEW SOLID SLBM	615	
		CSS-NX-3	616	
		M4B	617	
		M45	618	
		UNDEFINED	619 THROUGH 786	
		>1350 DM	787	
		ABM-1B (GALOSH)	788	
		ARROW	789	
		ASTER	790	
		CORPS SAM	791	
		ERINT	792	
		HAWK	793	
		PATRIOT	794	
		SA-10 (GRUMBLE)	795	
		SA-12A (GLADIATOR)	796	
		SA-12B (GIANT)	797	
		SA-N-6 (GRUMBLE)	798	
		SH-08 (GAZELLE)	799	
		STANDARD MISSILE BLOCK	800	
		IVA		
		THAAD	801	
		SM-2 BLOCK IV	802	
		SM-3 LEAP	803	
		UNDEFINED	804 THROUGH 876	
		INTERCEPTOR	877	
		OPERATIONAL COMMANDER	878 THROUGH 941	
		DEFINED 1-64		
		UNDEFINED	942 THROUGH 1022	
		BALLISTIC MISSILE	1023	
		GENERAL		
		UNDEFINED	1024 THROUGH 2046	
		SPACE GENERAL	2047	
		UNDEFINED	2048 THROUGH 4093	
		RESET TO NO STATEMENT	4094	
		UNDEFINED	4095	
804	003	AIR AMBIGUOUS TYPE 2		IDENTIFIES THE SECOND MOST PROBABLE
		-----		TARGET SPECIFIC TYPE IF AN
				ONBOARD CORRELATION PROCESS
				DETERMINES THAT THE SPECIFIC TYPE
				IS AMBIGUOUS. INFORMATION IN
				THIS FIELD SHALL BE DERIVED ONLY

FIELD CODING FOR J12.7C2

(SHEET 88)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2 -----	(CONTINUED)	

FROM ONBOARD SOURCES AS OPPOSED
TO DATA LINK SOURCES.

NO STATEMENT

0

FIGHTER

F-4 PHANTOM II	1
F-5 TIGER II	2
F-8 CRUSADER	3
F-14 TOMCAT	4
F-15 EAGLE	5
F-16 FIGHTING FALCON	6
F-101 VOODOO	7
F-104 STARFIGHTER	8
F-105 THUNDERCHIEF	9
F-106 DELTA DART	10
F-111 (GENERAL DYNAMICS)	11
F/A-18 HORNET	12
EFA	13
F-102	14
F-100	15
DISUSED	16
DISUSED	17
COMMANDO	18
DISUSED	19
DISUSED	20
J-35 DRAKEN	21
JAGUAR	22
SUPER ETENDARD	23
DISUSED	24 THROUGH 26
F-1 (MITSUBISHI)	27
F-35XD DRAKEN	28
DISUSED	29
HF-24 MARUT (WIND SPIRIT)	30
JA37 VIGGEN	31
DISUSED	32
SF-5 FREEDOM FIGHTER	33
IAR-91 ORAO	34
AJEET INVINCIBLE	35
KFIR C2	36

5.2-1097

MIL-STD-6016B

FIELD CODING FOR J12.7C2 (SHEET 89)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2	(CONTINUED)	

		MIRAGE F1	37	
		MIRAGE 3	38	
		MIRAGE 5	39	
		MIRAGE 50	40	
		MIRAGE 2000	41	
		DISUSED	42	
		DISUSED	43	
		ALPHA JET	44	
		KEFIR	45	
		F-6 FARMER	46	
		F-8 FISHBED	47	
		F-9 FANTAN	48	
		F-12 (CHINA)	49	
		SU-7 FITTER	50	
		SU-9 FISHPOT	51	
		SU-11 FLAGON	52	
		SU-15 FLAGON	53	
		SU-17 FITTER	54	
		SU-19 FENCER	55	
		SU-20 FITTER	56	
		SU-22 FITTER	57	
		SU-24 FENCER	58	
		SU-25 FROGFOOT	59	
		TU-28 FIDDLER	60	
		TU-128 FIDDLER	61	
		MIG-21 FISHBED	62	
		MIG-23 FLOGGER	63	
		MIG-25 FOXBAT	64	
		MIG-27 FLOGGER	65	
		YAK-28 FIREBAR	66	
		YAK-36 FORGER	67	
		AAF "RAM-J"	68	
		MIG-15 FAGOT	69	
		MIG-17 FRESCO	70	
		MIG-19 FARMER	71	
		SU-27 FLANKER	72	
		MIG-29 FULCRUM	73	
		MIG-31 FOXHOUND	74	
		YAK-38 FORGER-A	75	
		F-22 RAPTOR	76	
		F-84 THUNDERSTREAK	77	
		F-86 SABRE	78	
		F/A2 SEA HARRIER	79	

FIELD CODING FOR J12.7C2

(SHEET 90)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2	(CONTINUED)	

		IDF CHING-KUO (TAIWAN)	80	
		JAS-39 GRIPPEN	81	
		JIAN JI-7	82	
		JIAN JI-8-2	83	
		JOINT STRIKE FIGHTER	84	
		KFIR C7	85	
		KFIR 2000	86	
		RAFALE	87	
		SU-30	88	
		SU-33 (SU-27K)	89	
		SU-34	90	
		SU-35	91	
		SU-37	92	
		SU-39	93	
		YAK-141 FREESTYLE	94	
		F-5 FRESCO	95	
		F-7 FISHBED	96	
		J-9	97	
		RT33	98	
		CF-188 HORNET	99	
		UNDEFINED	100	
		TORNADO F3	101	
		SEA HARRIER	102	
		F-5 NORTHROP	103	
		UNDEFINED	104 THROUGH 254	
		FIGHTER GENERAL	255	

		BOMBERS/ATTACK		

		A-4 SKYHAWK	256	
		A-6 INTRUDER	257	
		A-7 CORSAIR II	258	
		A-10 THUNDERBOLT II	259	
		A-37 DRAGONFLY	260	
		B-1 (ROCKWELL)	261	
		B-52 STRATOFORTRESS	262	
		AC-130 HERCULES	263	
		AV-8 HARRIER	264	
		F/A-18 HORNET	265	
		FB-111 (GENERAL DYNAMICS)	266	

FIELD CODING FOR J12.7C2

(SHEET 91)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2	(CONTINUED)	

		A-1	267	
		TA-28	268	
		DISUSED	269	
		AC-47	270	
		AC-119	271	
		AC-124	272	
		ALPHA JET	273	
		DISUSED	274	THROUGH 276
		35XD DRAGEN	277	
		J-1 HAWK	278	
		J-1 JAESTREB	279	
		S-2	280	
		AJ37 VIGGEN	281	
		HA220 SUPER SAETA	282	
		M.B.326 (AERMACCHI)	283	
		M.B.339 (AERMACCHI)	284	
		SF 260 WARRIER	285	
		SK 60 (SAAB)	286	
		BAC 167 STRIKEMASTER	287	
		TORNADO GR-1 (IDS)	288	
		IL-28 BEAGLE	289	
		MI-4 BISON	290	
		TU-16 BADGER	291	
		TU-22 BLINDER	292	
		TU-22M BACKFIRE	293	
		TU-95 BEAR	294	
		TU-142 BEAR	295	
		YAK-28 BREWER	296	
		SUPER ENTENDARD	297	
		TU-160 BLACKJACK	298	
		AMX	299	
		FRS1 SEA HARRIER	300	
		FRS2 SEA HARRIER	301	
		FRS51 SEA HARRIER	302	
		F-117 NIGHTHAWK	303	
		G4 SUPER GALEB	304	
		G91Y	305	
		HAWK-2000	306	
		HAWK-100	307	
		HAWK-200	308	
		HAWK-50	309	
		HAWK-60	310	
		IA-58 PUCARA	311	

FIELD CODING FOR J12.7C2 (SHEET 92)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2	(CONTINUED)	

		IAR-93 ORAO	312	
		IAR-99 SOIM	313	
		JIAN JI-5M	314	
		A-5 FANTAN	315	
		L59 ALBATROS	316	
		B-2 SPIRIT	317	
		B-7 HONGZHA	318	
		1050E	319	
		A3 LEI MING	320	
		HARRIER GR4/7	321	
		TORNADO GR4	322	
		AV-8B HARRIER PLUS	323	
		CF-188 HORNET	324	
		RAFALE	325	
		UNDEFINED	326 THROUGH 510	
		BOMBER/ATTACK GENERAL	511	

		PATROL/RECON/ELECTRONIC/ TANKER/GENERAL		

		E-2 HAWKEYE	512	
		E-3 SENTRY (AWACS)	513	
		E-4 NEACP	514	
		EA-3	515	
		EA-6 PROWLER	516	
		EB-57 (DOUGLAS)	517	
		EC-130 HERCULES	518	
		EC-135 (BOEING)	519	
		EF-4 WILD WEASEL	520	
		EF-111 (GENERAL DYNAMICS)	521	
		EP-3 ORION	522	
		KA-3 (DOUGLAS)	523	
		KA-6 (GRUMMAN)	524	
		KC-10 EXTENDER	525	
		KC-130 HERCULES	526	
		KC-135 STRATOTANKER	527	
		O-1 BIRD DOG	528	
		O-2 (CESSNA)	529	
		OV-1 MOHAWK	530	
		OV-10 BRONCO	531	

5.2-1101

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 93)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2	(CONTINUED)	

		P-2 NEPTUNE	532	
		P-3 ORION	533	
		RC-130 HERCULES	534	
		RC-135 (BOEING)	535	
		RF-4 PHANTOM II	536	
		RF-5 (NORTHROP)	537	
		RF-8 CRUSADER	538	
		RF-14 TOMCAT	539	
		RF-104 STARFIGHTER	540	
		RP-3 ORION	541	
		RU-21 UTE	542	
		S-2 TRACKER	543	
		S-3 VIKING	544	
		SR-71 BLACKBIRD	545	
		U-2 (LOCKHEED)	546	
		U-4 AERO COMMANDER	547	
		U-5 H-500 TWIN	548	
		U-8 SEMINOLE	549	
		U-10 COURIER	550	
		UC-12 HURON	551	
		U-21 UTE	552	
		US-3 VIKING	553	
		OA-37 DRAGONFLY	554	
		TR-1	555	
		WC-130 HERCULES	556	
		E-1 TRACER	557	
		EB-66	558	
		EC-121	559	
		RA-3	560	
		SEA SCAN	561	
		FALCON 20 GUARDIAN	562	
		BR 1150 ATL1	563	
		RF-35XD DRAKEN	564	
		BN-2 MARITIME DEFENDER	565	
		DISUSED	566 THROUGH 567	
		CP-140 AURORA	568	
		HS.748 COASTGUARDER	569	
		HS.801 NIMROD	570	
		DISUSED	571	
		MK.3	572	
		RJ-1 HAWK	573	
		RJ-1 JAESTREB	574	
		SS-2	575	

5.2-1102

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 94)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2	(CONTINUED)	

		PEACE SENTINEL	576	
		KC-97	577	
		AU-24	578	
		AU-23	579	
		U-21	580	
		U-17	581	
		HU-16	582	
		U-9	583	
		U-3	584	
		RU-21	585	
		NKC-135	586	
		RF-101	587	
		RF-111	588	
		RB-57	589	
		RB-66	590	
		RC-121	591	
		BE-12 MAIL	592	
		IL-38 MAY	593	
		TU-126 MOSS	594	
		BE-6	595	
		VC-10 (TANKER)	596	
		AN-12 CUB-A (ELINT)	597	
		AN-12 CUB-C (EA)	598	
		AN-12 CUB-D (EA)	599	
		IL-20 COOT-A (ELINT)	600	
		IL-76 MAINSTAY	601	
		E-8 (J STARS)	602	
		TORNADO ECR	603	
		E-6 MERCURY	604	
		EMB-111	605	
		MU-2S	606	
		A40 ALBATROS	607	
		BE42 ALBATROS	608	
		CL215 AMPHIBIAN	609	
		IAI 1125	610	
		IL22 COOT B	611	
		J32 LANSEN	612	
		SH5 HARBIN	613	
		TIER1	614	
		TIER2	615	
		TIER3	616	
		US1 (SHIN)	617	
		C-212 CASA	618	

5.2-1103

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 95)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2	(CONTINUED)	

		CESSNA 550 CITATION II	619	
		CESSNA 560 CITATION V	620	
		CL 215 CANADAIR	621	
		DORNIER 27	622	
		F-27 FOKKER	623	
		NIMROD MRA4	624	
		CP-140A AURORA/ARCTURUS	625	
		RC-135 RIVET JOINT	626	
		ATL 2	627	
		ETENDARD IV P	628	
		ALIZE	629	
		FALCON 50	630	
		MIRAGE IV	631	
		MIRAGE 2000	632	
		BR 1150 GE ATL ASW	633	
		BR 1150 GE ATL SIGINT	634	
		C-130 HERCULES TANKER	635	
		ASTOR	636	
		UNDEFINED	637 THROUGH 761	
		TANKER	762	
		RECONNAISSANCE (RECON)	763	
		ELECTRONIC WARFARE (EW)	764	
		ASW	765	
		AEW AND C	766	
		MISCELLANEOUS GENERAL	767	

		TRAINER		

		T-2 BUCKEYE	768	
		T-28 TROJAN	769	
		T-29 (CONVAIR)	770	
		T-34 MENTOR	771	
		T-37 TWEET	772	
		T-38 TALON	773	
		T-39 SABERLINER	774	
		T-41 MESCALERO	775	
		T-42 CONCHISE	776	
		T-43 (BOEING)	777	
		T-44 KING AIR	778	
		TA-4 SKYHAWK	779	
		TA-7 CORSAIR II	780	

5.2-1104

MIL-STD-6016B

FIELD CODING FOR J12.7C2 (SHEET 96)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2 -----	(CONTINUED)	
		T-33	781	
		ALPHA JET	782	
		B3LA (SAAB)	783	
		C-101 AVIOJET	784	
		G2-A GALEB	785	
		G2-A SEAGULL	786	
		L-29 DELFIN	787	
		L-29 MAYA	788	
		L-39 ALBATROS	789	
		L-70 MILTRAINER	790	
		L-450	791	
		P.55 (PARTENAVIA)	792	
		T-2 (MITSUBISHI)	793	
		CM 170 MAGISTER	794	
		M.B.339 (AERMACCHI)	795	
		T-2 (MITSUBISHI)	796	
		CM AU/ MAGISTER	797	
		M.B.339 (AERMACCHI)	798	
		SF-260 (SIAI-MARCHETTI)	799	
		SH 37 VIGGEN	800	
		QH-50 DRAKEN	801	
		SK 37 VIGGEN	802	
		SK 60 (SAAB)	803	
		TB30 EPSILON	804	
		TF-35XD	805	
		TJ-1 HAWK	806	
		TJ-1 JASTRAEB	807	
		TS.11 SPARK	808	
		AW1-2 FAN TRAINER	809	
		DISUSED	810	
		HJT-16 KIRAN	811	
		MBB223 FLAMINGO	812	
		SU-11 MAIDEN	813	
		SU-15	814	
		MIG-15 MIDGET	815	
		MIG-17	816	
		MIG-21 MONGOL	817	
		MIG-23	818	
		MIG-25	819	
		YAK-11 MOOSE	820	
		YAK-18 MAX	821	
		YAK-28 MAESTRO	822	
		TF-104 STARFIGHTER	823	

FIELD CODING FOR J12.7C2 (SHEET 97)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2	(CONTINUED)	

		T-46A	824	
		EMB-312 TOUCAN	825	
		T-45 GOSHAWK	826	
		T-47	827	
		AS202	828	
		CT114 TUTOR	829	
		G91T (FIAT JET 1)	830	
		K8 (NAMC)	831	
		L70 VINKA	832	
		STRIKEMASTER (BAE)	833	
		T1 JAYHAWK	834	
		T4 (KAWASAKI)	835	
		CT-142 DASH 8	836	
		B-55 BARON	837	
		F-33 BONANZA	838	
		839 PILLAN-TAMIZ	839	
		CT-133 SILVERSTAR	840	
		UNDEFINED	841 THROUGH 1022	
		TRAINER GENERAL	1023	

		TRANSPORT/AIRLINER		

		C-1 (GRUMMAN COD)	1024	
		C-2 GREYHOUND	1025	
		C-5 GALAXY	1026	
		C-7 CARIBOU	1027	
		C-9 NIGHTINGALE	1028	
		C-12 HURON	1029	
		C-123 PROVIDER	1030	
		C-130 HERCULES	1031	
		C-135 STRATOLIFTER	1032	
		C-140 JETSTAR	1033	
		C-141 STARLIFTER	1034	
		HC-130 HERCULES	1035	
		VC-6 KING AIR	1036	
		VC-9 SKYTRAIN II	1037	
		VC-11 GULFSTREAM	1038	
		VC-137 (BOEING)	1039	
		707 (BOEING)	1040	
		720 (BOEING)	1041	
		727 (BOEING)	1042	

FIELD CODING FOR J12.7C2 (SHEET 98)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2	(CONTINUED)	

		737 (BOEING)	1043	
		747 (BOEING)	1044	
		757 (BOEING)	1045	
		767 (BOEING)	1046	
		L-100 HERCULES	1047	
		L-1011 TRI STAR	1048	
		DC-8 (DOUGLAS)	1049	
		DC-9 (DOUGLAS)	1050	
		DC-10 (DOUGLAS)	1051	
		C-119	1052	
		DC-130	1053	
		HC-97	1054	
		C-JM	1055	
		C-54	1056	
		C-97	1057	
		C-118	1058	
		C-119	1059	
		C-121	1060	
		C-124	1061	
		C-131	1062	
		C-133	1063	
		VC-47	1064	
		CV-54	1065	
		CV-140	1066	
		ARAVA	1067	
		CONCORDE	1068	
		ISLANDER	1069	
		SKYVAN	1070	
		TRIDENT	1071	
		A300 AIRBUS	1072	
		A310 AIRBUS	1073	
		C-1 (KAWASKI)	1074	
		C-160 TRANSALL	1075	
		C.207 AZOR	1076	
		C-212 AVIOCAR	1077	
		F27 FRIENDSHIPS	1078	
		F28 FELLOWSHIP	1079	
		G222 SAMA	1080	
		AW.660 ARGOSY	1081	
		BAC111 ONE-ELEVEN	1082	
		DHC-5 BUFFALO	1083	
		DHC-7 DASH	1084	
		AN-2 COLT	1085	

FIELD CODING FOR J12.7C2

(SHEET 99)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2	(CONTINUED)	

		AN-10 CAT	1086	
		AN-12 CUB	1087	
		AN-14 CLOD	1088	
		AN-22 COCK	1089	
		AN-24 COKE	1090	
		AN-26 CURL	1091	
		AN-28 CASK	1092	
		AN-30 CLANK	1093	
		AN-32 CLINE	1094	
		AN-40 (VERY LARGE TURBO- PROP)	1095	
		AN-72 COALER	1096	
		IL-12 COACH	1097	
		IL-18 COOT	1098	
		IL-62 CLASSIC	1099	
		IL-76 CANDID	1100	
		IL-86 CAMBER	1101	
		TU-114 CLEAT	1102	
		TU-134 CRUSTY	1103	
		TU-144 CHARGER	1104	
		TU-154 CARELESS	1105	
		YAK-40 CODDLING	1106	
		YAK-42 CLOBBER	1107	
		TU-104	1108	
		YAK-27	1109	
		IL-38	1110	
		DISUSED	1111	
		D0-228 LT (TRANSPORT)	1112	
		DISUSED	1113	
		AN-74	1114	
		AN-124 CONDOR	1115	
		A320 AIRBUS	1116	
		A321 AIRBUS	1117	
		A330 AIRBUS	1118	
		A340 AIRBUS	1119	
		AN-70	1120	
		AN-225 COSSACK	1121	
		BAE-125-600	1122	
		BAE146	1123	
		777 (BOEING)	1124	
		C-17 GLOBEMASTER III	1125	
		C-20 GULFSTREAM 3/4	1126	
		C-21 LEARJET 35	1127	

5.2-1108

MIL-STD-6016B

FIELD CODING FOR J12.7C2 (SHEET 100)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2	(CONTINUED)	

		C-22	1128	
		C-23 SHERPA/SHORTS 330	1129	
		C-26 METRO 3	1130	
		YS 11 (NAMC)	1131	
		CL-600 CHALLENGER	1132	
		CL-601 CHALLENGER	1133	
		CN-235M (AIRTECH)	1134	
		EMB-120 BRASILLIA ADV	1135	
		EMB-145 AMAZON	1136	
		IL-78 MIDAS	1137	
		MD-11	1138	
		MD-80	1139	
		MD-90	1140	
		PD-808	1141	
		TU-44	1142	
		V-22 OSPREY	1143	
		VC-25	1144	
		XC-2	1145	
		1124 (IAI)	1146	
		1900 (BEECH)	1147	
		330 (SHORTS)	1148	
		580 (CONVAIR)	1149	
		ATR42	1150	
		B55 BARON	1151	
		BN2 ISLANDER	1152	
		C46 COMMANDO	1153	
		CARAVELL (SUD)	1154	
		CC109 (CANADAIR)	1155	
		CHALLENGER (CANADAIR)	1156	
		DHC2	1157	
		DHC6 TWIN OTTER	1158	
		DHC8	1159	
		EMB110 BANDEIRANTE	1160	
		EMB121	1161	
		FALCON 200/FALCON 20	1162	
		FALCON 50	1163	
		FALCON 900	1164	
		FH227 FRIENDSHIP	1165	
		FOKKER 100	1166	
		FOKKER 50	1167	
		FOKKER 60	1168	
		FOKKER 70	1169	
		GROB G850	1170	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2	(CONTINUED)	

		GULFSTREAM 1	1171	
		GULFSTREAM 2	1172	
		JETSTREAM	1173	
		JETSTREAM 31	1174	
		KING AIR	1175	
		L410 TURBOJET	1176	
		LEARJET 23	1177	
		LEARJET 24	1178	
		LEARJET 25 (IMPROVED VER 28)	1179	
		LEARJET 35/36	1180	
		LEARJET 55 (IMPROVED VER 28)	1181	
		LEARJET 60	1182	
		MERLIN 2	1183	
		MERLIN 3	1184	
		MERLIN 4	1185	
		METRO 3	1186	
		SAAB 2000	1187	
		SAAB 340	1188	
		SABRELINER	1189	
		U6 BEAVER	1190	
		VISCOUNT	1191	
		W3 SOKOL	1192	
		Y11 (HAMC)	1193	
		Y12 (HAMC)	1194	
		Y5	1195	
		CC-115 BUFFALO	1196	
		CC-130 HERCULES	1197	
		CC-150 POLARIS	1198	
		C-235 CASA	1199	
		CC-138 TWIN OTTER	1200	
		DO-228 LM (POLLUTION CONTROL)	1201	
		UNDEFINED	1202 THROUGH 1277	
		LIGHT CIVIL	1278	
		TRANSPORT/AIRLINER	1279	
		GENERAL		

		HELICOPTERS		

FIELD CODING FOR J12.7C2 (SHEET 102)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2	(CONTINUED)	

		AH-1 COBRA	1280	
		AH-64 APACHE	1281	
		CH-3 (SIKORSKY)	1282	
		CH-46 (SEA KNIGHT)	1283	
		CH-47 CHINOOK	1284	
		CH-53 SEA STALLION	1285	
		CH-54 LARKE (SKYCRANE)	1286	
		EH-60 QUICK FOX	1287	
		HH-1 IROQUOIS	1288	
		HH-2 SEA SPRITE	1289	
		HH-3 JOLLY GREEN	1290	
		HH-52 (SIKORSKY)	1291	
		HH-53 (SIKORSKY)	1292	
		OH-6 (HUGHES)	1293	
		OH-58 KIOWA	1294	
		RH-3 SEA KING	1295	
		RH-53 (SIKORSKY)	1296	
		SH-2 SEA SPRITE	1297	
		SH-3 SEA KING	1298	
		SH-60 SEA HAWK	1299	
		UH-1 IROQUOIS	1300	
		UH-2 SEA SPRITE	1301	
		UH-12 (HILLER)	1302	
		UH-46 (BOEING)	1303	
		UH-60 BLACK HAWK	1304	
		CH-2U	1305	
		HH-43	1306	
		A109 (AGUSTA)	1307	
		A129 MONGOOSE	1308	
		B0-105 (MBB)	1309	
		DISUSED	1310	
		CH-124 SEA KING	1311	
		DISUSED	1312 THROUGH 1314	
		SA 315 LAMA	1315	
		DISUSED	1316	
		DISUSED	1317	
		SA 321 SUPER FRELON	1318	
		SA 330 PUMA	1319	
		SA 332 SUPER PUMA	1320	
		S 342 GAZELLE	1321	
		SA 350 ASTAR	1322	
		SA 360 DAUPHIN	1323	
		SA 361 DAUPHIN	1324	

5.2-1111

MIL-STD-6016B

FIELD CODING FOR J12.7C2 (SHEET 103)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2	(CONTINUED)	

		WG-13 LYNX	1325	
		WG-34 (WESTLAND)	1326	
		KA-18 HOG	1327	
		KA-20 HARP	1328	
		KA-25 HORMONE	1329	
		KA-26 HOODLUM	1330	
		MI-1 HARE	1331	
		MI-2 HOPLITE	1332	
		MI-4 HOUND	1333	
		MI-6 HOOK	1334	
		MI-8 HIP	1335	
		MI-10 HARKE	1336	
		MI-12 HOMER	1337	
		MI-14 HAZE	1338	
		MI-24 HIND	1339	
		MI-26 HALO	1340	
		CH-53E SUPER STALLION	1341	
		MH-53E SEA DRAGON	1342	
		HH-60 NIGHT HAWK	1343	
		HH-65A DOLPHIN	1344	
		KA-27 HELIX-A (ASW)	1345	
		KA-32 HELIX	1346	
		MI-17 HIP-H	1347	
		MI-28 HAVOC	1348	
		ECUREUIL/FENNEL/ESQILO	1349	
		KA-29 HELIX-B	1350	
		KA-50 HOKUM	1351	
		204 BELL	1352	
		205 BELL	1353	
		206 BELL	1354	
		214 BELL	1355	
		280 ENSTROM	1356	
		300 SCHWEIZER	1357	
		406 COMBAT SCOUT	1358	
		A 109 HIRUNDO	1359	
		A 129 MANGUSTA	1360	
		AH 6 CAYUSE	1361	
		ALOUETTE 2	1362	
		ALOUETTE 3	1363	
		AS 350 ECUREUIL	1364	
		AS 532 COUGAR	1365	
		AS 550 FENNEC	1366	
		AS 555 FENNEC	1367	

FIELD CODING FOR J12.7C2 (SHEET 104)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2	(CONTINUED)	

		AS 565 PANTHER	1368	
		CH 34 WESTLAND	1369	
		EH 101	1370	
		HAS 1 WASP	1371	
		KA-28 HELIX A	1372	
		MD 500 DEFENDER	1373	
		MI 22	1374	
		MI 25	1375	
		MI 35	1376	
		MI 9	1377	
		SA 341 GAZELLE	1378	
		SA 342 GAZELLE	1379	
		SA 365 DAUPHIN 2	1380	
		TS11 ISKRA	1381	
		WESSEX	1382	
		Z9 (HARBIN)	1383	
		CH-146 GRIFFON	1384	
		SEA KING AEW (SKW)	1385	
		EH 101 MERLIN	1386	
		AB-212 AUGUSTA BELL	1387	
		BO-105 BOLKOW	1388	
		CH-47 CHINOOK	1389	
		HUGHES 500	1390	
		HUGHES 3000	1391	
		SH-3D SIKORSKY	1392	
		SH-70L SIKORSKY	1393	
		CH-113 LABRADOR	1394	
		NH 90 (C2)	1395	
		NH 90 (RECCE)	1396	
		NH 90 (EW/SEAD)	1397	
		NH 90 (TRANSPORT)	1398	
		SEA LYNX MK88A	1399	
		SEA KING MK41 (KWS)	1400	
		TIGER (HAP)	1401	
		NH 90 (NAVY)	1402	
		TIGER (HAC)	1403	
		SA 341 GAZELLE CANON	1404	
		AS 532 COUGAR HORIZON	1405	
		AW-520 SAR CORMORANT	1406	
		UNDEFINED	1407 THROUGH 1534	
		HELICOPTER GENERAL	1535	

FIELD CODING FOR J12.7C2

(SHEET 105)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2	(CONTINUED)	

		AIR-AIR MISSILES		

		AIM-4A FALCON	1536	
		AIM-7 SPARROW	1537	
		AIM-9 SIDEWINDER	1538	
		AIM-54 PHOENIX	1539	
		AIM-2A GENIE	1540	
		AIM-120 AMRAAM	1541	
		ASLAM	1542	
		R.530	1543	
		R.550 MAGIC	1544	
		S.530 SUPER 530	1545	
		ASPIDER	1546	
		DISUSED	1547	
		SHAFRIR	1548	
		SKY FLASH	1549	
		DISUSED	1550	
		AA-2 ATOLL	1551	
		AA-3 ANAB	1552	
		AA-5 ASH	1553	
		AA-6 ACRID	1554	
		AA-7 APEX	1555	
		AA-8 APHID	1556	
		AAM	1557	
		AA-9 AMOS	1558	
		AA-XP-1/2	1559	
		AQM-34	1560	
		AQM-91	1561	
		BGM-34 FIREBEE/MQM34	1562	
		YQM-94	1563	
		YQM-98	1564	
		AIM-132 ASRAAM	1565	
		MICA	1566	
		PL-2A	1567	
		PL-5B	1568	
		PL-7	1569	
		PL-9	1570	
		PYTHON 3	1571	
		PYTHON 4	1572	
		AA-10 ALAMO	1573	
		AA-11 ARCHER	1574	

5.2-1114

MIL-STD-6016B

FIELD CODING FOR J12.7C2 (SHEET 106)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2	(CONTINUED)	

		AA-12 ADDER	1575	
		AA-1 ALKALI	1576	
		AAM-1	1577	
		UNDEFINED	1578 THROUGH 1790	
		AIR-TO-AIR MISSILE	1791	
		GENERAL		

		AIR-GROUND/GROUND-		
		GROUND MISSILES		

		AGM-45 SHRIKE	1792	
		AGM-65 MAVERICK	1793	
		AGM-69 SRAM	1794	
		AGM-78 STANDARD ARM	1795	
		AGM-84 HARPOON	1796	
		AGM-86 ALCM	1797	
		AGM-88 HARM	1798	
		AGM-109 TOMAHAWK	1799	
		AM 39 EXOCET	1800	
		AGM-119 PENGUIN	1801	
		AS 11 KILTER	1802	
		AS 12 KEGLER	1803	
		AS 15 KENT	1804	
		AS 30	1805	
		DISUSED	1806	
		RB 05	1807	
		RB 08	1808	
		ADVANCED ASM	1809	
		AS-1 KENNEL	1810	
		AS-2 KIPPER	1811	
		AS-3 KANGAROO	1812	
		AS-4 KITCHEN	1813	
		AS-5 KELT	1814	
		AS-6 KINGFISH	1815	
		AS-7 KERRY	1816	
		DISUSED	1817	
		AS-10 KAREN	1818	
		AS-9 KYLE	1819	
		AS 34 KORMORAN	1820	
		ASM GABRIEL	1821	
		ASM SEA SKUA	1822	

FIELD CODING FOR J12.7C2 (SHEET 107)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2	(CONTINUED)	

		ASM SEA EAGLE	1823	
		ASMP	1824	
		AT-2 SWATTER	1825	
		AT-3 SAGGER	1826	
		AT-6 SPIRAL	1827	
		C-601	1828	
		C-611	1829	
		C-801	1830	
		C-802	1831	
		CSS-2	1832	
		CSS-3	1833	
		CSS-N-3	1834	
		CSS-X-4	1835	
		FL-2 SILKWORM	1836	
		FL-7	1837	
		HY-2	1838	
		HY-3	1839	
		M-9/11	1840	
		WS-1	1841	
		AS-13 KINGBOLT	1842	
		AS-14 KEDGE	1843	
		AS-16 KICKBACK	1844	
		AS-17 KRYPTON	1845	
		AS-18 KAZOO	1846	
		AT-4 SPIGOT	1847	
		AT-5 SPANDREL	1848	
		AT-7 SAXHORN	1849	
		AT-10 STABBER	1850	
		AT-11 SNIPER	1851	
		AT-12	1852	
		AT-13	1853	
		AT-14	1854	
		FROG-7	1855	
		SS-1 SCUD	1856	
		SS-11 SEGO	1857	
		SS-13 SAVAGE	1858	
		SS-18 SATAN	1859	
		SS-19 STILETTO	1860	
		SS-24 SCALPEL	1861	
		SS-25 SICKLE	1862	
		SS-N-2 STYX	1863	
		SS-N-3 SHADDOCK	1864	
		SS-N-6 SERB	1865	

FIELD CODING FOR J12.7C2

(SHEET 108)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2	(CONTINUED)	

		SS-N-7 STARBRIGHT	1866	
		SS-N-8 SAWFLY	1867	
		SS-N-9 SIREN	1868	
		SS-N-12 SANDBOX	1869	
		SS-N-18 STINGRAY	1870	
		SS-N-19 SHIPWRECK	1871	
		SS-N-20 STURGEON	1872	
		SS-N-21 SAMPSON	1873	
		SS-N-22 SUNBURN	1874	
		SS-N-23 SKIFF	1875	
		SS-N-26	1876	
		AGNI	1877	
		PRITHVI	1878	
		TOW	1879	
		AGM-114 HELLFIRE	1880	
		MLRS	1881	
		HOT	1882	
		MILAN	1883	
		TRIGAT	1884	
		OTOMAT	1885	
		RBS-15M	1886	
		ARMAT	1887	
		ALARM	1888	
		AGM-12 BULLPUP	1889	
		AGM-62A WALLEYE	1890	
		AGM-123A SKIPPER II	1891	
		APACHE (ASM)	1892	
		AS 8	1893	
		AT-1 SWATTER	1894	
		CAS1	1895	
		KH-41 MOSKIT	1896	
		MARTIN PESCADOR	1897	
		MAS1 CARCARA	1898	
		RB 04E	1899	
		STAR	1900	
		SEA INDIGO	1901	
		MM 38	1902	
		MM 40	1903	
		SM 39	1904	
		AS 34 KORMORAN II	1905	
		UNDEFINED	1906 THROUGH 2046	
		AIR-GROUND MISSILE	2047	
		GENERAL		

5.2-1117

MIL-STD-6016B

FIELD CODING FOR J12.7C2 (SHEET 109)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2	(CONTINUED)	

		SURFACE TO AIR MISSILES		

		FIM-92 STINGER	2048	
		NIM-23 HAWK	2049	
		MIM-42 REDEYE	2050	
		MIM-72 CHAPARRAL	2051	
		MIM-104 PATRIOT	2052	
		RIM-2 TERRIER	2053	
		RIM-7 SEA SPARROW	2054	
		RIM-8 TALOS	2055	
		RIM-24 TARTAR	2056	
		RIM-66 STANDARD MISSILE	2057	
		RIM-67 STANDARD MISSILE	2058	
		BLOWPIPE	2059	
		DISUSED	2060 THROUGH 2061	
		SEA DART	2062	
		DISUSED	2063	
		SEA WOLF	2064	
		S 440 CROTALE EDIR	2065	
		RAPIER	2066	
		RBS-70 (SLM)	2067	
		DISUSED	2068	
		SAM ROLAND	2069	
		SA-2 GUIDELINE	2070	
		SA-3 GOA	2071	
		SA-4 GANEF	2072	
		SA-N-3 GOBLET	2073	
		SA-5 GAMMON	2074	
		SA-N-4 GECKO	2075	
		SA-6 GAINFUL	2076	
		SA-N-6 GRUMBLE	2077	
		SA-7 GRAIL	2078	
		SA-8 GECKO	2079	
		SA-9 GASKIN	2080	
		SA-10 GRUMBLE	2081	
		SA-11 GADFLY	2082	
		SA-12	2083	
		SA-13 GOPHER	2084	
		MISTRAL	2085	
		SA-N-7 GADFLY	2086	
		SA-N-8 GREMLIN	2087	

FIELD CODING FOR J12.7C2 (SHEET 110)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	003	AIR AMBIGUOUS TYPE 2	(CONTINUED)	

		SA-14 GREMLIN	2088	
		SA-16 GIMLET	2089	
		SA-X-17	2090	
		SA-N-5 GRAIL	2091	
		SA-N-11 GRISOM	2092	
		SA-12A GLADIATOR	2093	
		SA-12B GIANT	2094	
		SA-14 GREMLIN	2095	
		SA-15 GAUNTLET	2096	
		SA-17 GRIZZLY	2097	
		SA-N-12 GRIZZLY	2098	
		SA-18 GROUSE	2099	
		SA-19 GRISOM	2100	
		RIM-116 RAM	2101	
		ADATS	2102	
		JAVELIN	2103	
		STARBURST	2104	
		STARSTREAK	2105	
		ASPIDER	2106	
		I-HAWK	2107	
		ROLAND II	2108	
		SM-2 BLOCK II	2109	
		SM-2 BLOCK III	2110	
		SM-2 BLOCK IIIA	2111	
		SM-2 BLOCK IIIB	2112	
		SM-2 BLOCK IV	2113	
		SM-2 BLOCK IVA	2114	
		SM-3 LEAP	2115	
		AKASH	2116	
		ANZA	2117	
		ANZA II	2118	
		CSA-1	2119	
		CSA-2	2120	
		CSA-4	2121	
		CSA-5	2122	
		FM-80	2123	
		HN-5	2124	
		NK-7	2125	
		NK-16	2126	
		PANTZYR	2127	
		RAPIER 2000/JERNAS	2128	
		RBS-90	2129	
		SAKR	2130	

FIELD CODING FOR J12.7C2 (SHEET 111)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

804	003	AIR AMBIGUOUS TYPE 2 -----	(CONTINUED)	
		SAVA	2131	
		SHANINE	2132	
		SKYGUARD ASPIDE	2133	
		SPADA	2134	
		TAM SAM	2135	
		TIGERCAT	2136	
		VANGUARD	2137	
		SA-N-1 GOA	2138	
		SA-N-9 GAUNTLET	2139	
		SA-N-10	2140	
		ALBATROS/ASPIDE	2141	
		SM-1	2142	
		VT1 CROTALE	2143	
		MASURCA	2144	
		ASTER 15	2145	
		ASTER 30	2146	
		UNDEFINED	2147 THROUGH 4093	
		RESET TO NO STATEMENT	4094	
		SURFACE-TO-AIR MISSILE GENERAL	4095	

808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2 -----		IDENTIFIES THE SECOND MOST PROBABLE TARGET SPECIFIC TYPE IF AN ONBOARD CORRELATION PROCESS DETERMINES THAT THE SPECIFIC TYPE IS AMBIGUOUS. INFORMATION IN THIS FIELD SHALL BE DERIVED ONLY FROM ONBOARD SOURCES AS OPPOSED TO DATA LINK SOURCES.
		NO STATEMENT	0	
		CV GENERAL	1	
		CLEMENCEAU	2	
		ENTERPRISE	3	
		FORRESTAL	4	
		JOHN F KENNEDY	5	
		KITTY HAWK	6	
		MIDWAY	7	
		NIMITZ	8	
		CHARLES DE GAULLE	9	
		UNDEFINED	10 THROUGH 21	
		CVS GENERAL	22	
		DEDALO	23	
		MINAS GERAIS	24	

FIELD CODING FOR J12.7C2

(SHEET 112)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		VIKRANT	25	
		VEINTICINCO DE MAYO	26	
		VIRAAT	27	
		UNDEFINED	28 THROUGH 35	
		CVH GENERAL	36	
		GIUSEPPE GARIBALDI	37	
		INVINCIBLE	38	
		JEANNE D'ARC	39	
		KIEV	40	
		PRINCIPE DE ASTURIAS	41	
		UNDEFINED	42	
		KIEV (MODIFIED)	43	
		UNDEFINED	44 THROUGH 52	
		BB GENERAL	53	
		IOWA	54	
		UNDEFINED	55 THROUGH 64	
		CC GENERAL	65	
		SVERDLOV (MODIFIED)	66	
		UNDEFINED	67 THROUGH 76	
		CG GENERAL	77	
		ANDREA DORIA	78	
		BAINBRIDGE	79	
		BELKNAP	80	
		CALIFORNIA	81	
		UNDEFINED	82	
		KARA	83	
		KIROV	84	
		KRESTA I	85	
		KRESTA II	86	
		KYNDA	87	
		LEAHY	88	
		LONG BEACH	89	
		SLAVA	90	
		TICONDEROGA	91	
		TRUXTUN	92	
		VIRGINIA	93	
		VITTORIO VENETO	94	
		UNDEFINED	95 THROUGH 118	
		CH GENERAL	119	
		MOSKVA	120	
		UNDEFINED	121 THROUGH 130	
		CA GENERAL	131	

5.2-1121

MIL-STD-6016B

FIELD CODING FOR J12.7C2 (SHEET 113)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		UNDEFINED	132	
		SVERDLOV	133	
		UNDEFINED	134 THROUGH 143	
		DD GENERAL	144	
		AKIZUKI	145	
		ALLEN M SUMNER	146	
		ALLEN M SUMNER FRAM II	147	
		ALMIRANTE	148	
		AMATSUKAZE	149	
		ANIMOSO	150	
		ANSHAN	151	
		ARLEIGH BURKE	152	
		ASAGARI	153	
		UNDEFINED	154	
		AUDACE	155	
		AYANAMI	156	
		DISUSED	157	
		CARPENTER FRAM I	158	
		CHARLES F ADAMS (MOD)	159	
		CHARLES F ADAMS	160	
		COONTZ	161	
		DISUSED	162 THROUGH 163	
		UNDEFINED	164	
		FLETCHER	165	
		FORREST SHERMAN (MOD) & HULL	166	
		FRIESLAND	167	
		GEARING FRAM I	168	
		GEARING FRAM II	169	
		UNDEFINED	170	
		DISUSED	171	
		HARUNA	172	
		HATAKAZE	173	
		HATSUYUKI	174	
		IMPAVIDO	175	
		KANIN	176	
		KASHIN (MODIFIED)	177	
		KASHIN	178	
		KASHIN II	179	
		KIDD	180	
		UNDEFINED	181	
		KILDIN (MODIFIED)	182	

FIELD CODING FOR J12.7C2

(SHEET 114)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		KOTLIN	183	
		KOTLIN (MODIFIED)	184	
		LUDA (TYPE 051)	185	
		MEKO 360	186	
		MINEGUMO	187	
		PROJECT 15	188	
		ROBERT H SMITH	189	
		ROGER D LAURIA	190	
		SAM KOTLIN	191	
		SHIRANE	192	
		SKORY	193	
		SOVREMENYY	194	
		SPRUANCE	195	
		SUFFREN	196	
		TACHIKAZE	197	
		TAKATSUKI	198	
		TYPE 42	199	
		DISUSED	200	
		DISUSED	201	
		TYPE F-70 (AAW)	202	
		TYPE F-70 (ASW)	203	
		TYPE F-67	204	
		UNDEFINED	205	THROUGH 206
		TYPE T-53 (MODIFIED-ASW)	207	
		UNDEFINED	208	
		UDALOY	209	
		YAMAGUMO	210	
		Z	211	
		IROQUOIS	212	
		UNDEFINED	213	THROUGH 276
		DE GENERAL	277	
		UNDEFINED	278	
		CASTLE	279	
		UNDEFINED	280	THROUGH 295
		FF GENERAL	296	
		ALMIRANTE CLEMENTE	297	
		ALMIRANTE PEREIRA DA SILVA	298	
		ALPINO	299	
		DISUSED	300	THROUGH 301
		BALEARES	302	
		BAPTISTA DE ANDRADE	303	

5.2-1123

MIL-STD-6016B

FIELD CODING FOR J12.7C2 (SHEET 115)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		UNDEFINED	304	
		BERK	305	
		BLACK SWAN	306	
		BROADSWORD (TYPE 22)	307	
		BRONSTEIN	308	
		BROOKE	309	
		CANNON	310	
		CHARLES LAWRENCE	311	
		CHENGDU	312	
		CHIKUGO	313	
		COMANDANTE JOAO BELO	314	
		UNDEFINED	315	
		CROSLEY	316	
		DEALEY	317	
		DESCUBIERTA	318	
		DUKE (TYPE 23)	319	
		DURANGO	320	
		EDSALL	321	
		GARCIA	322	
		GLOVER	323	
		GODAVARI	324	
		GRISHA I	325	
		GRISHA II	326	
		GRISHA III	327	
		UNDEFINED	328	
		GRISHA V	329	
		UNDEFINED	330	
		HVIDBJORNEN	331	
		ISHKARI	332	
		ISUZU	333	
		JACOB VAN HEEMSKERCK	334	
		JIANGDONG (TYPE 053J)	335	
		JIANGHU (TYPE 053H)	336	
		JIANGNAN	337	
		JOAO COUTINHO	338	
		KAREL DOORMAN	339	
		KNOX	340	
		DISUSED	341	
		KONI	342	
		KORTENAER	343	
		KRIVAK I	344	
		KRIVAK II	345	

FIELD CODING FOR J12.7C2 (SHEET 116)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		KRIVAK III	346	
		LA FAYETTE	347	
		DISUSED	348	
		LEOPARD	349	
		LUPU	350	
		M	351	
		DISUSED	352	
		MAESTRALE	353	
		MEKO 140 TYPE	354	
		MEKO 200 TYPE	355	
		MIRKA I	356	
		MIRKA II	357	
		NIELS JUEL	358	
		NITEROI	359	
		OLIVER HAZARD PERRY	360	
		OSLO	361	
		PEDER SKRAM	362	
		PETYA I (MODIFIED)	363	
		PETYA I	364	
		PETYA II (MODIFIED)	365	
		PETYA II	366	
		PETYA III	367	
		UNDEFINED	368	
		DISUSED	369	
		RIGA	370	
		RIVER	371	
		BRANDENBURG (TYPE 123)	372	
		RUDDEROW	373	
		SACHSEN (TYPE 124)	374	
		SAVAGE	375	
		DISUSED	376	
		TROMP	377	
		TYPE A 69	378	
		TYPE F-2000S	379	
		UNDEFINED	380 THROUGH 381	
		YUBARI	382	
		BREMEN (TYPE 122)	383	
		CLAUDE JONES	384	
		FFG 7	385	
		HALIFAX	386	
		NAJIN	387	
		PRESIDENT	388	

FIELD CODING FOR J12.7C2

(SHEET 117)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		SANTA MARIA	389	
		VOSPER MK 5	390	
		VOSPERTHORNYCROFT MK 7	391	
		WIELINGEN	392	
		FLOREAL	393	
		COMMANDANT BORY	394	
		UNDEFINED	395 THROUGH 478	
		FS GENERAL	479	
		ALBATROS	480	
		AUK CLASS	481	
		DE CRISTOFARO	482	
		DISUSED	483	
		MINERVA	484	
		NANUCHKA I	485	
		NANUCHKA II	486	
		NANUCHKA III	487	
		DISUSED	488	
		PF-103	489	
		SAAR 5	490	
		SLEIPNER	491	
		TARANTUL I	492	
		TARANTUL II	493	
		DISUSED	494	
		WADI	495	
		UNDEFINED	496 THROUGH 517	
		LL GENERAL	518	
		UNDEFINED	519 THROUGH 528	
		LCC GENERAL	529	
		BLUE RIDGE	530	
		CAVEZZALE	531	
		UNDEFINED	532 THROUGH 540	
		LKA GENERAL	541	
		CHARLESTON	542	
		UNDEFINED	543 THROUGH 552	
		LFS GENERAL	553	
		UNDEFINED	554 THROUGH 563	
		LHA GENERAL	564	
		TARAWA	565	
		UNDEFINED	566 THROUGH 575	
		LHD GENERAL	576	
		WASP	577	
		UNDEFINED	578 THROUGH 587	

FIELD CODING FOR J12.7C2 (SHEET 118)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		LPA GENERAL	588	
		UNDEFINED	589 THROUGH 598	
		LPD GENERAL	599	
		AUSTIN	600	
		FEARLESS	601	
		IVAN ROGOV	602	
		UNDEFINED	603	
		RALEIGH	604	
		SAN GIORGIO	605	
		UNDEFINED	606 THROUGH 615	
		LPH GENERAL	616	
		IWO JIMA	617	
		UNDEFINED	618 THROUGH 627	
		LSD GENERAL	628	
		ANCHORAGE	629	
		ASHLAND	630	
		CABILDO	631	
		OURAGAN	632	
		FOUDRE	633	
		THOMASTON	634	
		WHIDBEY ISLAND	635	
		UNDEFINED	636 THROUGH 646	
		LSL GENERAL	647	
		SIR GERAINT	648	
		UNDEFINED	649 THROUGH 657	
		LSM GENERAL	658	
		ASHDOD	659	
		BATRAL	660	
		CAKABEY	661	
		EDIC I	662	
		EDIC II	663	
		LSM-1	664	
		MP-4	665	
		POLNOCHNY	666	
		POLOCHNY A	667	
		POLOCHNY B	668	
		POLOCHNY C	669	
		POLOCHNY D	670	
		YUDAO	671	
		YULIMG	672	
		BOUGAINVILLE	673	
		UNDEFINED	674 THROUGH 687	

FIELD CODING FOR J12.7C2

(SHEET 119)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		LST GENERAL	688	
		ALLIGATOR	689	
		ATSUMI	690	
		UNDEFINED	691	
		BROOKE MARINE 93M	692	
		CAKABEY NL-122	693	
		CNIM PS 700	694	
		DE SOTO COUNTY	695	
		DISUSED	696	
		HENGAM	697	
		LST 1-510	698	
		LST 511-1152	699	
		MIURA	700	
		NEWPORT	701	
		ROPUCHA	702	
		SARUCABEY	703	
		CNGF	704	
		OCEAN	705	
		ALBION	706	
		TERREBONNE PARISH	707	
		TOBRUK	708	
		UNDEFINED	709	
		YUKAN	710	
		UNDEFINED	711 THROUGH 730	
		LSV GENERAL	731	
		UNDEFINED	732 THROUGH 741	
		LC GENERAL	742	
		UNDEFINED	743 THROUGH 751	
		LCM GENERAL	752	
		CTM 1	753	
		HUNGNAM	754	
		LCM 1057/1058	755	
		LCM 6	756	
		LCM 8	757	
		T-4	758	
		TSAPLYA	759	
		LCM (TYPE 521)	760	
		UNDEFINED	761 THROUGH 772	
		LCP GENERAL	773	
		DISUSED	774	
		LCM 1031	775	
		LCM 1035/1036	776	

5.2-1128

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 120)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		LCM 1055/1056	777	
		NAMPO	778	
		UNDEFINED	779 THROUGH 788	
		LCPL GENERAL	789	
		UNDEFINED	790 THROUGH 799	
		LWC GENERAL	800	
		UNDEFINED	801 THROUGH 810	
		LCU GENERAL	811	
		BALIKPAPAN	812	
		BOMBARDA	813	
		BRAILA	814	
		LCU (TYPE 520)	815	
		DISUSED	816	
		DISUSED	817	
		DISUSED	818	
		DSM-501	819	
		HANCHON	820	
		HANTAE	821	
		KISHON	822	
		KVALSUND	823	
		LCT MK 5	824	
		LCT MK 6	825	
		LCU 501	826	
		MFP D-3	827	
		MZ	828	
		REINOYSUND	829	
		SMB-1	830	
		TU 57-M	831	
		US LCU 1466	832	
		VYDRA	833	
		YURA	834	
		UNDEFINED	835 THROUGH 866	
		LCVP GENERAL	867	
		UNDEFINED	868 THROUGH 877	
		LCAC GENERAL	878	
		AIST	879	
		GUS	880	
		LEBED	881	
		UTENOK	882	
		WELLINGTON BH-7 MK 4	883	
		WELLINGTON BH-7 MK 5	884	
		WINCHESTER (SR.N6)	885	

FIELD CODING FOR J12.7C2

(SHEET 121)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		UNDEFINED	886 THROUGH 896	
		MM GENERAL	897	
		ALESHA	898	
		ALVSBORG	899	
		BORGEN	900	
		CARLSKRONA	901	
		COSAR	902	
		FALSTER	903	
		FURUSUND (MUL-20)	904	
		LANGELAND	905	
		LINDORMEN	906	
		LSM-1 (MODIFIED)	907	
		MUL-11	908	
		MUL-12	909	
		DISUSED	910	
		SMITH	911	
		US YMP	912	
		VIDAR	913	
		UNDEFINED	914 THROUGH 935	
		MCS GENERAL	936	
		UNDEFINED	937 THROUGH 946	
		MCJ GENERAL	947	
		UNDEFINED	948 THROUGH 957	
		MCD GENERAL	958	
		KINGSTON	959	
		MUEHLHAUSEN MCD (TYPE 742A)	960	
		UNDEFINED	961 THROUGH 968	
		MCM GENERAL	969	
		UNDEFINED	970 THROUGH 979	
		MH GENERAL	980	
		UNDEFINED	981 THROUGH 990	
		MHO GENERAL	991	
		UNDEFINED	992 THROUGH 1001	
		MHC GENERAL	1002	
		ADJUTANT (MODIFIED)	1003	
		AGGRESSIVE	1004	
		CIRCE	1005	
		WEIDEN MHC (TYPE 332)	1006	
		KOBLENZ MHC (TYPE 331B)	1007	
		UNDEFINED	1006 THROUGH 1007	
		HAM	1008	

5.2-1130

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 122)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2 -----	(CONTINUED)	
		HUNT	1009	
		LANDSORT	1010	
		LERICI	1011	
		MSC 50	1012	
		MSO 218	1013	
		MSO 503	1014	
		SAUDA	1015	
		SIRIUS	1016	
		DISUSED	1017	
		TRIPARTITE	1018	
		VANYA I	1019	
		SANDOWN (SRMH)	1020	
		UNDEFINED	1021 THROUGH 1029	
		MHSC GENERAL	1030	
		MARS	1031	
		UNDEFINED	1032 THROUGH 1043	
		MHI GENERAL	1044	
		BAY	1045	
		UNDEFINED	1046 THROUGH 1054	
		MHA GENERAL	1055	
		UNDEFINED	1056 THROUGH 1065	
		ML GENERAL	1066	
		UNDEFINED	1067 THROUGH 1076	
		MLC GENERAL	1077	
		CURLEW	1078	
		UNDEFINED	1079 THROUGH 1088	
		MLI GENERAL	1089	
		UNDEFINED	1090 THROUGH 1099	
		MLO GENERAL	1100	
		UNDEFINED	1101 THROUGH 1110	
		MLR GENERAL	1111	
		UNDEFINED	1112 THROUGH 1121	
		MLA GENERAL	1122	
		UNDEFINED	1123 THROUGH 1132	
		MLS GENERAL	1133	
		UNDEFINED	1134 THROUGH 1143	
		MS GENERAL	1144	
		UNDEFINED	1145 THROUGH 1154	
		MSF GENERAL	1155	
		EX-ERIMO	1156	
		K-8	1157	
		KROGULEC	1158	

FIELD CODING FOR J12.7C2

(SHEET 123)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		M-40	1159	
		MSO-421	1160	
		NATYA I	1161	
		NATYA II	1162	
		RIVER	1163	
		T-43	1164	
		YURKA	1165	
		UNDEFINED	1166 THROUGH 1180	
		MSO GENERAL	1181	
		ACME	1182	
		AGGRESSIVE	1183	
		UNDEFINED	1184 THROUGH 1193	
		MSC GENERAL	1194	
		136 FT	1195	
		ADJUTANT	1196	
		ARKOE	1197	
		BAY	1198	
		DOKKUM	1199	
		HATSUSHIMA	1200	
		HAYASE	1201	
		DISUSED	1202	
		KOUZJ	1203	
		LENIWKA	1204	
		HAMELN MSC (TYPE 343)	1205	
		MSC 268	1206	
		MSC 292	1207	
		MSC 294	1208	
		NOTEC	1209	
		SASHA	1210	
		SAUDA	1211	
		DISUSED	1212	
		DISUSED	1213	
		SONYA	1214	
		T-301	1215	
		T-43	1216	
		TAKAMI	1217	
		DISUSED	1218	
		VANYA	1219	
		VANYA I	1220	
		VANYA II	1221	
		WUSONG	1222	
		ZHENYA	1223	

5.2-1132

MIL-STD-6016B

FIELD CODING FOR J12.7C2 (SHEET 124)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		UNDEFINED	1224 THROUGH 1263	
		MSI GENERAL	1264	
		DISUSED	1265	
		AUX MINESWEEPER NO 1	1266	
		CAPE	1267	
		FRAUENLOB (TYPE 394)	1268	
		HAM	1269	
		HERSTAL	1270	
		KIISKI	1271	
		KUHA	1272	
		M-111	1273	
		M-15	1274	
		M-31	1275	
		M-43/47	1276	
		PIPA-A	1277	
		WOCHANG	1278	
		YEVGENYA	1279	
		YUKTO	1280	
		UNDEFINED	1281 THROUGH 1302	
		MSR GENERAL	1303	
		UNDEFINED	1304 THROUGH 1313	
		MSB GENERAL	1314	
		K-8	1315	
		N-300	1316	
		NESTIN	1317	
		N0. 7	1318	
		OLYA	1319	
		PO-2	1320	
		TR-40	1321	
		VD-141	1322	
		VULCAIN	1323	
		STYX	1324	
		PLUTON	1325	
		ACHERON	1326	
		UNDEFINED	1327 THROUGH 1334	
		MSA GENERAL	1335	
		UNDEFINED	1336 THROUGH 1345	
		MSD GENERAL	1346	
		HFG-1 (TROIKA)	1347	
		ILYUSHA	1348	
		UNDEFINED	1349 THROUGH 1358	
		MCSD GENERAL	1359	

FIELD CODING FOR J12.7C2 (SHEET 125)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		UNDEFINED	1360 THROUGH 1369	
		MSS GENERAL	1370	
		ANDRYUSHA	1371	
		BALTIKA	1372	
		POLNOCNY	1373	
		UNDEFINED	1374 THROUGH 1383	
		MSH GENERAL	1384	
		UNDEFINED	1385 THROUGH 1394	
		MSO GENERAL	1395	
		BERLAIMONT (MODIFIED)	1396	
		UNDEFINED	1397 THROUGH 1405	
		MSHC GENERAL	1406	
		HUNT	1407	
		TRIPARTITE	1408	
		WILTON	1409	
		UNDEFINED	1410 THROUGH 1419	
		PP GENERAL	1420	
		AB 25	1421	
		UNDEFINED	1422	
		BALDER	1423	
		CASTLE	1424	
		ISLAND	1425	
		KRONSHADT	1426	
		PC-1638	1427	
		UNDEFINED	1428 THROUGH 1438	
		PG GENERAL	1439	
		BESKYTTEVREN	1440	
		BIHORO	1441	
		ERIMO	1442	
		DISUSED	1443	
		HVIDBJOERNEN	1444	
		IZU	1445	
		KOJIMA	1446	
		UNDEFINED	1447	
		NOJIMA	1448	
		PAUK	1449	
		PEACOCK	1450	
		POTI	1451	
		SAVAGE	1452	
		SHIRETOKO	1453	
		SOYA	1454	
		TACOMA	1455	

FIELD CODING FOR J12.7C2

(SHEET 126)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		LEOPARD (TYPE 148)	1456	
		BAMBU	1457	
		CASSIOPEA	1458	
		UNDEFINED	1459 THROUGH 1480	
		PGS GENERAL	1481	
		UNDEFINED	1482 THROUGH 1491	
		PGB GENERAL	1492	
		UNDEFINED	1493 THROUGH 1502	
		PGF GENERAL	1503	
		ALBATROS (TYPE 143)	1504	
		ASHEVILLE	1505	
		BARNEGAT	1506	
		CHONGJU	1507	
		GEPRD (TYPE 143A)	1508	
		HOUKU	1509	
		IVANSUSANIN	1510	
		KAMAN	1511	
		KARTAL	1512	
		KOMAR	1513	
		LA COMBATTANTE II	1514	
		LA COMBATTANTE III	1515	
		LURSSN FPB 57 TYPE	1516	
		OKHTENSKIY	1517	
		OSA I	1518	
		OSA II	1519	
		P-4	1520	
		PURGA	1521	
		SAAR 2	1522	
		SAAR 3	1523	
		SAAR 4	1524	
		SAAR 5	1525	
		SARIWON	1526	
		SNOEGG	1527	
		SOHUNG	1528	
		SOJU	1529	
		SORUM	1530	
		STORM	1531	
		T	1532	
		T-43	1533	
		T-58	1534	
		VOSPER 100-FT	1535	
		VOSPER BRAVE	1536	

FIELD CODING FOR J12.7C2 (SHEET 127)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		WILLEMOES	1537	
		UNDEFINED	1538	THROUGH 1583
		PC GENERAL	1584	
		ADMIRABLE	1585	
		AGDLEK	1586	
		AKIZUKI	1587	
		ATTACK	1588	
		BAY	1589	
		DISUSED	1590	
		BROOKE MARINE 108-FT	1591	
		CACINE	1592	
		CHONGJU	1593	
		DAPHNE	1594	
		GDANSK	1595	
		HAIKOU	1596	
		HAINAN	1597	
		HANOE	1598	
		K-48	1599	
		KRALJEVICA	1600	
		KRONSHADT	1601	
		LAKE	1602	
		MAGAEN	1603	
		MATSUNAMI	1604	
		MIZUTORI	1605	
		MURAKUMO	1606	
		OBLUZE	1607	
		PGM 71	1608	
		SDB MK II	1609	
		SDB MK III	1610	
		SEAFORTH	1611	
		SHANGHAI	1612	
		SHANGHAI II	1613	
		SHANGHAI II (MODIFIED)	1614	
		SHIKINAMI	1615	
		SO-1	1616	
		SOMAN	1617	
		STENKA	1618	
		T-58	1619	
		TAECHONG	1620	
		UK FORD	1621	
		UMIGIRI	1622	
		US 110-FT	1623	

FIELD CODING FOR J12.7C2 (SHEET 128)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		US 173-FT	1624	
		UNDEFINED	1625	
		ARCHER	1626	
		ATTACKER	1627	
		23M PC (MANLY)	1628	
		UNDEFINED	1629 THROUGH 1681	
		PCF GENERAL	1682	
		BABOCHKA	1683	
		MURAVEY	1684	
		POTI	1685	
		SO-1 (MODIFIED)	1686	
		UNDEFINED	1687 THROUGH 1696	
		PCE GENERAL	1697	
		UNDEFINED	1698 THROUGH 1707	
		PB GENERAL	1708	
		AKAGI	1709	
		AKIZUKI	1710	
		ALBATROZ	1711	
		ATTACK P-90	1712	
		BARSO	1713	
		BAY	1714	
		BIZAN	1715	
		BROOKE MARINE 37.5M	1716	
		CHONGJIN	1717	
		DABUR	1718	
		DALARO	1719	
		DE L'ESTEREL	1720	
		DILOS	1721	
		DOM ALEIXO	1722	
		DISUSED	1723	
		FREMANTLE	1724	
		GOULANDRIS	1725	
		GUANABACOA	1726	
		HAMAGIRI	1727	
		HAMELIN 37M	1728	
		HIDAKA	1729	
		HUANGPU	1730	
		INTERCEPTOR MK II	1731	
		KIMJIN 67-FT	1732	
		MATSUNAMI	1733	
		MURAKUMO	1734	
		OIRASE	1735	

FIELD CODING FOR J12.7C2

(SHEET 129)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		P 400	1736	
		P-6	1737	
		PANAGOPOULOS	1738	
		PATRA	1739	
		PBR MK II	1740	
		PBR MK III	1741	
		PGM 71	1742	
		PO-2	1743	
		POLISH K-8	1744	
		POLUCHAT I	1745	
		SHANTOU	1746	
		SHIKINAMI	1747	
		SINHUNG 72-FT	1748	
		SKANOER	1749	
		SOYA/TSUGARU	1750	
		SPEAR	1751	
		STEWART 85-FT	1752	
		SWATOW	1753	
		SWIFT	1754	
		TAISHAN	1755	
		TESHIO	1756	
		TRACKER II	1757	
		US 110-FT	1758	
		US ARMY 2001 65-FT	1759	
		USCG 83-FT	1760	
		VEDETTE 28 92-FT	1761	
		VIKRAM	1762	
		VOSPER 70-FT	1763	
		YAMAYURI	1764	
		ZHUK	1765	
		SNOEGG	1766	
		MARS	1767	
		TRIDENT	1768	
		UNDEFINED	1769 THROUGH 1842	
		PBF GENERAL	1843	
		CHAO (CHODO)	1844	
		DE L'ESTEREL	1845	
		GIRNE	1846	
		HAUK	1847	
		HUGIN	1848	
		SLEPEN	1849	
		UNDEFINED	1850	

5.2-1138

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 130)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2 -----	(CONTINUED)	
		SPICA II	1851	
		MARS	1852	
		UNDEFINED	1853	THROUGH 1863
		PBS GENERAL	1864	
		UNDEFINED	1865	THROUGH 1874
		PBR GENERAL	1875	
		LEIE	1876	
		PIYAVKA	1877	
		SHMEL	1878	
		VOSH	1879	
		YATUSH	1880	
		YAZ	1881	
		UNDEFINED	1882	THROUGH 1891
		PT GENERAL	1892	
		AN JU	1893	
		EPITROP	1894	
		HIGGINS 78-FT	1895	
		HUCHUAN PTH-	1896	
		HUZHOU	1897	
		IWON	1898	
		DISUSED	1899	
		KU SONG	1900	
		NO. 11	1901	
		P-4	1902	
		P-6	1903	
		PILICA	1904	
		SHERSHEN	1905	
		SIN HUNG	1906	
		SIN NAM	1907	
		SINPO	1908	
		SOLOVEN	1909	
		SPICA	1910	
		TJELD	1911	
		WISLA	1912	
		DISUSED	1913	
		SHANGDONG	1914	
		TURYA	1915	
		UNDEFINED	1916	THROUGH 2047
		PHM GENERAL	2048	
		MATKA	2049	
		PEGASUS	2050	
		SARANCHA	2051	

FIELD CODING FOR J12.7C2

(SHEET 131)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2 -----	(CONTINUED)	
		SHIMRIT	2052	
		SPARVIERO	2053	
		UNDEFINED	2054 THROUGH 2063	
		BM GENERAL	2064	
		UNDEFINED	2065 THROUGH 2074	
		BMR GENERAL	2075	
		UNDEFINED	2076 THROUGH 2085	
		SWCL GENERAL	2086	
		UNDEFINED	2087 THROUGH 2096	
		AA GENERAL	2097	
		UNDEFINED	2098 THROUGH 2107	
		AG GENERAL	2108	
		ADOLF	2109	
		AKIZUKI	2110	
		ANGARA	2111	
		ARGO	2112	
		AYANAMI	2113	
		DISUSED	2114 THROUGH 2115	
		CHAMOIS	2116	
		CHIHAYA	2117	
		DALDYN	2118	
		DISUSED	2119	
		DINGHAI	2120	
		ENDURANCE	2121	
		EXPLORER	2122	
		DISUSED	2123	
		FRIPONNE	2124	
		GALEB	2125	
		UNDEFINED	2126	
		HAM	2127	
		DISUSED	2128	
		HAYABUSA	2129	
		DISUSED	2130	
		ISLES	2131	
		KEYLA	2132	
		KURIHAMA	2133	
		L ' ARCHEONAUTE	2134	
		L ' ATHOS	2135	
		UNDEFINED	2136	
		LENTRA	2137	
		LIANYUN	2138	
		LSIL	2139	

FIELD CODING FOR J12.7C2

(SHEET 132)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		MIZUTORI	2140	
		MP-2	2141	
		MP-8	2142	
		MURASAME	2143	
		NEFTEGAZ	2144	
		NØ. 81	2145	
		NORGE	2146	
		OHRE	2147	
		ONEGA	2148	
		DISUSED	2149	
		POSEIDON	2150	
		PS-10	2151	
		RARI	2152	
		RHIN	2153	
		SABAC	2154	
		SHAHSAVAR	2155	
		ST. LYKODIS	2156	
		STALWART	2157	
		T-43	2158	
		TAPATAI	2159	
		TAPPE	2160	
		THULE	2161	
		TOMBA	2162	
		TSUGARU	2163	
		UMITAKA	2164	
		US 184 FT. PCE	2165	
		US 72 FT. HMDL	2166	
		VANGUARD	2167	
		VIS	2168	
		VYTEGRALES	2169	
		WHISKEY	2170	
		WILHELM PULLWER (TYPE 741)	2171	
		PELIKAAN	2172	
		RANCE	2173	
		MERCURE	2174	
		STERNE	2175	
		ALBATROS	2176	
		PHENIX	2177	
		UNDEFINED	2178 THROUGH 2256	
		ARV GENERAL	2257	
		ARGUS	2258	

5.2-1141

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 133)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2 -----	(CONTINUED)	
		ENGADINE	2259	
		RELIANT	2260	
		UNDEFINED	2261 THROUGH 2270	
		AVT GENERAL	2271	
		LEXINGTON	2272	
		UNDEFINED	2273 THROUGH 2282	
		AE GENERAL	2283	
		EVROS	2284	
		DISUSED	2285	
		KILAUEA	2286	
		NITRO	2287	
		REGENT	2288	
		SURIBACHI	2289	
		WESTERWALD (TYPE 760)	2290	
		UNDEFINED	2291 THROUGH 2301	
		AEL GENERAL	2302	
		UNDEFINED	2303 THROUGH 2312	
		AET GENERAL	2313	
		UNDEFINED	2314 THROUGH 2323	
		AETL GENERAL	2324	
		UNDEFINED	2325 THROUGH 2334	
		AGF GENERAL	2335	
		ABDIEL	2336	
		CORONADO	2337	
		GODETIA	2338	
		LA SALLE	2339	
		DISUSED	2340	
		ZINNIA	2341	
		ELBE (TYPE 404)	2342	
		UNDEFINED	2343 THROUGH 2351	
		ACM GENERAL	2352	
		UNDEFINED	2353 THROUGH 2362	
		APB GENERAL	2363	
		MICHELANGELO	2364	
		UNDEFINED	2365 THROUGH 2374	
		ABU GENERAL	2375	
		CARDENAS	2376	
		FINIK I	2377	
		KARPF II	2378	
		SKB 64	2379	
		YANTAI	2380	
		YANNAN	2381	

5.2-1142

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 134)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		YANGUAN	2382	
		TIANEE	2383	
		LA PRUDENTE	2384	
		UNDEFINED	2385 THROUGH 2395	
		ABUD GENERAL	2396	
		UNDEFINED	2397 THROUGH 2406	
		ANL GENERAL	2407	
		UNDEFINED	2408 THROUGH 2417	
		ARC GENERAL	2418	
		EMBA I	2419	
		EMBA II	2420	
		KALAR	2421	
		KLASMA	2422	
		MP-2	2423	
		NEPTUNE	2424	
		TELNOVSK (MODIFIED)	2425	
		YOUDIAN	2426	
		ZEUS	2427	
		UNDEFINED	2428 THROUGH 2440	
		AK GENERAL	2441	
		2ND LT JOHN P BOBO	2442	
		ALCHIBA	2443	
		AMGUEMA	2444	
		ANDIZHAN	2445	
		ANDONG	2446	
		ANDROMEDA (CONVERTED)	2447	
		DISUSED	2448	
		BARRICADE	2449	
		BITTERBUSH	2450	
		C3-S-33A TYPE	2451	
		(CONVERTED)		
		C4-S-66A TYPE	2452	
		C4-S-69B TYPE	2453	
		C4-S-A3 TYPE	2454	
		C5-S-75A TYPE	2455	
		CHULYM	2456	
		CPL LOUIS J HAUGE JR	2457	
		DINGHAI	2458	
		DONBA SS	2459	
		FS DESIGN 330	2460	
		GALATI	2461	
		HONGQI	2462	

5.2-1143

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 135)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2 -----	(CONTINUED)	
		ISLES	2463	
		KANARYA	2464	
		KOLOMNA	2465	
		LENINGRADSKY KOMSOMOLETS	2466	
		LSIL	2467	
		NEON ANTONOV	2468	
		NORWALK	2469	
		PT-61	2470	
		SGT MATEJ KOCAK	2471	
		THROSK	2472	
		TREE	2473	
		YANHANG	2474	
		YUNYY PARTIZAN	2475	
		UNDEFINED	2476 THROUGH 2521	
		AKL GENERAL	2522	
		ELTANIN	2523	
		KEYLA	2524	
		UNDEFINED	2525	
		LENTA	2526	
		UNDEFINED	2527	
		MP 4	2528	
		MP 6	2529	
		MUNA	2530	
		SEKSTAN	2531	
		TELNOVSK	2532	
		WISTING	2533	
		GORGONA	2534	
		UNDEFINED	2535 THROUGH 2549	
		AKR GENERAL	2550	
		ALGOL (SL 7)	2551	
		CALLAGHAN	2552	
		COMET	2553	
		METEOR	2554	
		DISUSED	2555	
		MAINE (CONVERTED)	2556	
		UNDEFINED	2557 THROUGH 2566	
		AFS GENERAL	2567	
		FORT	2568	
		UNDEFINED	2569	
		MARS	2570	
		RESOURCE	2571	
		UNDEFINED	2572 THROUGH 2580	

5.2-1144

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 136)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		AOE GENERAL	2581	
		SACRAMENTO	2582	
		SAGAMI	2583	
		UNDEFINED	2584 THROUGH 2593	
		AD GENERAL	2594	
		YELLOWSTONE	2595	
		SAMUEL GOMPERS	2596	
		DIXIE	2597	
		STALWART	2598	
		UNDEFINED	2599 THROUGH 2608	
		AWW GENERAL	2609	
		UNDEFINED	2610 THROUGH 2619	
		AH GENERAL	2620	
		HAVEN	2621	
		OB	2622	
		DISUSED	2623	
		UNDEFINED	2624 THROUGH 2632	
		AGB GENERAL	2633	
		DOBRYNYA NIKITICH	2634	
		HANSE	2635	
		IVANSUSANIN	2636	
		SHIRASE	2637	
		YANHA	2638	
		UNDEFINED	2639 THROUGH 2648	
		AGBL GENERAL	2649	
		EISVOGEL (TYPE 721)	2650	
		DISUSED	2651	
		UNDEFINED	2652 THROUGH 2661	
		AGI GENERAL	2662	
		ALPINIST	2663	
		ARMINZA	2664	
		UNDEFINED	2665	
		BALZAM	2666	
		BOLOGOE	2667	
		DISUSED	2668	
		HAM	2669	
		DISUSED	2670	
		DISUSED	2671	
		LENTRA	2672	
		MAYAK	2673	
		MIRNYY	2674	
		MOMA	2675	

5.2-1145

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 137)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		NIKOLAY ZUBOV	2676	
		OKEAN	2677	
		DISUSED	2678	
		PAMIR	2679	
		PRIMORYE	2680	
		ALSTER (TYPE 423)	2681	
		UNDEFINED	2682	THROUGH 2705
		ALS GENERAL	2706	
		UNDEFINED	2707	THROUGH 2716
		AEM GENERAL	2717	
		AMGA	2718	
		ANDIZHAN (MODIFIED)	2719	
		LAMA	2720	
		MALINA	2721	
		MELITOPOL	2722	
		MP 6	2723	
		UNDEFINED	2724	THROUGH 2733
		AGM GENERAL	2734	
		AGM-24	2735	
		GEN HOYT S VANDENBERG	2736	
		OBSERVATION ISLAND	2737	
		RANGE SENTINEL	2738	
		(HASKELL TYPE)		
		REDSTONE	2739	
		UNDEFINED	2740	THROUGH 2749
		AGOR GENERAL	2750	
		ABKHAZIYA	2751	
		AKADEMIK KRYLOV	2752	
		ARAD	2753	
		BALIKPAPAN	2754	
		BELGICA	2755	
		DISUSED	2756	
		COOK	2757	
		D'ENTRECASTEAUX	2758	
		DOBRYNYA NIKITICH	2759	
		DONG MING	2760	
		ELTANIN	2761	
		ENDEAVOR	2762	
		FRANCESCO NULLO	2763	
		DISUSED	2764	
		GRIGORE ANTIPA	2765	
		GYRE	2766	

5.2-1146

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 138)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		HAYES	2767	
		HECLA	2768	
		MELVILLE	2769	
		MSC 60	2770	
		NAUTILUS	2771	
		NEVELSKOY	2772	
		NIKOLAY ZUBOV	2773	
		PITHEAS	2774	
		POLYUS	2775	
		QUEST	2776	
		ROBERT D CONRAD	2777	
		T-43	2778	
		TRITON	2779	
		TUI	2780	
		TYDEMAN	2781	
		XIANG YANG HONG	2782	
		YANLUN	2783	
		YUG	2784	
		ZENOBE GRAMME	2785	
		MAYAK	2786	
		UNDEFINED	2787 THROUGH 2823	
		AGOB GENERAL	2824	
		POLARSTERN	2825	
		UNDEFINED	2826 THROUGH 2835	
		AGOS GENERAL	2836	
		UNDEFINED	2837 THROUGH 2845	
		AO GENERAL	2846	
		UNDEFINED	2847	
		AKAR	2848	
		ALBAY BURBAK	2849	
		ALTAY	2850	
		UNDEFINED	2851	
		BASKUNCHAK	2852	
		BAYLEAF	2853	
		BINBASI GURGAN	2854	
		DISUSED	2855	
		CIMARRON	2856	
		CIMARRON (JUMBOISED)	2857	
		DORA	2858	
		HAMANA	2859	
		DISUSED	2860	
		DISUSED	2861	

FIELD CODING FOR J12.7C2

(SHEET 139)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		HENRY J KAISER	2862	
		IRTYSH	2863	
		KALININGRADNEFT	2864	
		KHOBI	2865	
		KONDA	2866	
		METTAWEE	2867	
		MISPILLION (JUMBOISED)	2868	
		MOSKIT	2869	
		NEOSHO	2870	
		NERCHA	2871	
		NORWEGIAN BOW	2872	
		OLEKMA	2873	
		PATAPSCO	2874	
		PEVEK	2875	
		UNDEFINED	2876	
		SOFIYA	2877	
		SPESSART (TYPE 704A)	2878	
		TASKIZAK	2879	
		USEDOM	2880	
		WALCHENSEE (TYPE 703)	2881	
		WAVE	2882	
		DISUSED	2883	
		YUZHASI TOLUNAY	2884	
		BRAMBLELEAF	2885	
		UNDEFINED	2886	THROUGH 2936
		AOT GENERAL	2937	
		AMERICAN EXPLORER	2938	
		AOTL	2939	
		EBANOL	2940	
		FULIN	2941	
		FUZHOU	2942	
		GUANZGHOU	2943	
		LEIZHOU	2944	
		MAUMEE	2945	
		METTAWEE	2946	
		MISSION	2947	
		POTOMOC	2948	
		SEALIFT	2949	
		SUAMICO	2950	
		T 5 TYPE	2951	
		TM2	2952	
		PORT VENDRES	2953	

5.2-1148

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 140)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		UNDEFINED	2954 THROUGH 2973	
		AOTL GENERAL	2974	
		DISUSED	2975	
		KHOBI	2976	
		UNDEFINED	2977 THROUGH 2986	
		AOR GENERAL	2987	
		BANDAR ABBAS	2988	
		BEREZINA	2989	
		BORIS CHILIKIN	2990	
		CAPITAN OLA PANTOJA	2991	
		DEEPAK	2992	
		DUBNA	2993	
		DURANCE	2994	
		FUQING	2995	
		KAZBEK	2996	
		KHARG	2997	
		MEERSBURG (TYPE 701C)	2998	
		MESAR	2999	
		OLWEN	3000	
		POOLSTER	3001	
		POLYARNIK	3002	
		PROTECTEUR	3003	
		PROVIDER	3004	
		ROVER	3005	
		SAO GABRIEL	3006	
		STROMBOLI	3007	
		TIDE (IMPROVED)	3008	
		UDA	3009	
		WICHITA	3010	
		FORT VICTORIA	3011	
		BERLIN (TYPE 702C)	3012	
		UNDEFINED	3013 THROUGH 3042	
		AORL GENERAL	3043	
		LEIZHOU	3044	
		UNDEFINED	3045 THROUGH 3054	
		AOL GENERAL	3055	
		PUNARUU	3056	
		UNDEFINED	3057 THROUGH 3065	
		AGP GENERAL	3066	
		GRAHAM COUNTY	3067	
		NORGE	3068	
		DISUSED	3069	

FIELD CODING FOR J12.7C2

(SHEET 141)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		MERCUUR	3070	
		UNDEFINED	3071 THROUGH 3079	
		AP GENERAL	3080	
		MIKHAIL KALININ	3081	
		PANDORA	3082	
		QIONGSHA	3083	
		UNDEFINED	3084 THROUGH 3093	
		AGR GENERAL	3094	
		UNDEFINED	3095 THROUGH 3104	
		AOSR GENERAL	3105	
		UNDEFINED	3106 THROUGH 3115	
		AR GENERAL	3116	
		ACHELOUS	3117	
		AJAX	3118	
		AMPHION	3119	
		AMUR	3120	
		ARL I	3121	
		DALIANG	3122	
		DILIGENCE	3123	
		DIXIE	3124	
		JULES VERNE	3125	
		OSKOL	3126	
		RHIN	3127	
		STALWART	3128	
		UNDEFINED	3129 THROUGH 3145	
		ARL GENERAL	3146	
		ARCHELOUS	3147	
		UNDEFINED	3148 THROUGH 3157	
		AGE GENERAL	3158	
		BELGICA	3159	
		BERRY	3160	
		UNDEFINED	3161	
		COMMANDANT RIVIERE	3162	
		DESNA	3163	
		DOBRYNYA NIKITICH	3164	
		EF 3	3165	
		HENRI POINCARE	3166	
		ILE D'OLERON	3167	
		IVANSUSANIN	3168	
		KOLOMNA	3169	
		LENTRA	3170	
		MARSHAL NEDELIN	3171	

5.2-1150

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 142)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		MOMA	3172	
		MP-8	3173	
		MUNA	3174	
		NARVIK	3175	
		OS-3	3176	
		POINT LOMA	3177	
		POTOK	3178	
		QUARTO	3179	
		SASHA	3180	
		SIBIR	3181	
		SO-1	3182	
		T-43	3183	
		TRITON	3184	
		DISUSED	3185	
		YAL 01	3186	
		YANXI	3187	
		ROSSETTI	3188	
		DENTI	3189	
		MONGE	3190	
		UNDEFINED	3191 THROUGH 3227	
		ARS GENERAL	3228	
		BOLSTER	3229	
		DISUSED	3230	
		INGUL	3231	
		KATUN I	3232	
		KATUN II	3233	
		KOWAN	3234	
		LSIL 351	3235	
		MIKHAIL RUDNITSKY	3236	
		OREL	3237	
		PAMIR	3238	
		PIAST	3239	
		PROTEO	3240	
		PS-11	3241	
		SAFEGUARD	3242	
		SILVA	3243	
		SPASILAC	3244	
		DISUSED	3245	
		US 149 FT	3246	
		YANDING	3247	
		UNDEFINED	3248 THROUGH 3273	
		ARSD GENERAL	3274	

5.2-1151

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 143)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		UNDEFINED	3275 THROUGH 3284	
		ASVR GENERAL	3285	
		UNDEFINED	3286 THROUGH 3295	
		AOS GENERAL	3296	
		ALATNA	3297	
		LUZA	3298	
		URAL	3299	
		VALA	3300	
		TONTI	3301	
		UNDEFINED	3302 THROUGH 3311	
		AF GENERAL	3312	
		CROITOR	3313	
		DANLIN	3314	
		MAYAK	3315	
		RIEGEL	3316	
		UNDEFINED	3317 THROUGH 3326	
		AKS GENERAL	3327	
		UNDEFINED	3328 THROUGH 3337	
		AKSL GENERAL	3338	
		UNDEFINED	3339 THROUGH 3348	
		AFL GENERAL	3349	
		UNDEFINED	3350 THROUGH 3359	
		ASR GENERAL	3360	
		ANTEO	3361	
		CHANTICLEER	3362	
		DAHIANG	3363	
		DALANG	3364	
		ELBRUS	3365	
		FEHMARN (TYPE 720B)	3366	
		FUSHIMI	3367	
		GALATI	3368	
		HUDONG	3369	
		KURTARAN	3370	
		NEPA	3371	
		PIGEON	3372	
		PRUT	3373	
		ROSLAVL	3374	
		SPASILAC	3375	
		VALDAY	3376	
		ZHONGHUA	3377	
		UNDEFINED	3378 THROUGH 3401	
		AS GENERAL	3402	

FIELD CODING FOR J12.7C2

(SHEET 144)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		ACHELOUS	3403	
		AEGIR	3404	
		DISUSED	3405	
		ATREK	3406	
		CHIYODA	3407	
		DADONG	3408	
		DAZHOU	3409	
		DIVER	3410	
		DNEPR	3411	
		DNEPR (MODIFIED)	3412	
		DON	3413	
		EMORY S LAND	3414	
		FULTON	3415	
		HUNLEY	3416	
		L Y SPEAR	3417	
		PROTEUS	3418	
		DISUSED	3419	
		SIMON LAKE	3420	
		UGRA	3421	
		UNDEFINED	3422 THROUGH 3447	
		ASL GENERAL	3448	
		UNDEFINED	3449 THROUGH 3458	
		AGS GENERAL	3459	
		AGS 39 CLASS	3460	
		AKASHI	3461	
		ALMEIDA CARVALHO	3462	
		AMMIRAGLIO MAGNAGHI	3463	
		ANDRIJA MOHOROVICIC	3464	
		AUK	3465	
		BIYA	3466	
		BOLOGUE	3467	
		UNDEFINED	3468	
		BUYSKES	3469	
		C4-S-A1 TYPE (CONVERTED)	3470	
		CHAUVENET	3471	
		COOK	3472	
		DING HAI	3473	
		FINIK	3474	
		FS DESIGN 330	3475	
		FUTAMI	3476	
		HAMASHIO	3477	
		HEIYO	3478	

5.2-1153

MIL-STD-6016B

FIELD CODING FOR J12.7C2 (SHEET 145)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		KAIBOKAN I	3479	
		KAIYO	3480	
		KAMENKA	3481	
		DISUSED	3482	
		UNDEFINED	3483	
		L'ESPERANCE	3484	
		UNDEFINED	3485	
		LENTRA	3486	
		LSIL	3487	
		MEIYO	3488	
		MELITOPOL	3489	
		MOMA	3490	
		MONOWAI	3491	
		MORESBY	3492	
		MP-8	3493	
		MSC-294 (BLUEBIRD)	3494	
		NYRYAT I	3495	
		NYRYAT II	3496	
		SAMARA	3497	
		SHOYO	3498	
		SILAS BENT	3499	
		STERNE	3500	
		SUMA	3501	
		T-43	3502	
		TAKUYO	3503	
		TELNOVSK	3504	
		TELNOVSK (MODIFIED)	3505	
		TENYO	3506	
		VICTORY (CONVERTED)	3507	
		WILKES	3508	
		YANLAI	3509	
		YANXU	3510	
		MIRTO	3511	
		MARS	3512	
		LAPEROUSE	3513	
		UNDEFINED	3514 THROUGH 3579	
		AGSA GENERAL	3580	
		UNDEFINED	3581 THROUGH 3590	
		AGSC GENERAL	3591	
		EXPLORER	3592	
		FLINDERS	3593	
		TAINO	3594	

FIELD CODING FOR J12.7C2

(SHEET 146)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		BULLDOG	3595	
		ROEBUCK	3596	
		UNDEFINED	3597	THROUGH 3604
		AX GENERAL	3605	
		ARIS	3606	
		DISUSED	3607	
		JADRAN	3608	
		JERVIS BAY	3609	
		JOSE MARTI	3610	
		MP-8	3611	
		SMOLNY	3612	
		UGRA	3613	
		VIETNAM HEROICO	3614	
		WODNIK	3615	
		UNDEFINED	3616	THROUGH 3630
		AXL GENERAL	3631	
		UNDEFINED	3632	
		LEOPARD	3633	
		MAYAK	3634	
		UNDEFINED	3635	THROUGH 3642
		AXS GENERAL	3643	
		AMERIGO VESPUCCI	3644	
		CAROLY	3645	
		CARSARO II	3646	
		GORCH FOCK (TYPE 441A)	3647	
		MIRCEA	3648	
		PALINURO	3649	
		SAGRES	3650	
		STELLA POLARE	3651	
		UNDEFINED	3652	THROUGH 3659
		AT GENERAL	3660	
		UNDEFINED	3661	THROUGH 3665
		ATA GENERAL	3666	
		ABNAKI	3667	
		APACHE	3668	
		ARMY 254	3669	
		ATAK	3670	
		ATLANTE	3671	
		AZUMA	3672	
		BELIER	3673	
		UNDEFINED	3674	
		GAJ	3675	

5.2-1155

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 147)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		GNIEWKO	3676	
		GORYN	3677	
		GROMOVOY	3678	
		KUDRET	3679	
		MAITO	3680	
		MB-31	3681	
		MB-65	3682	
		MOTYL	3683	
		OKHTENSKIY	3684	
		ONCU	3685	
		POWHATAN	3686	
		ROSLAVL	3687	
		ROYSTERER	3688	
		SAINT	3689	
		SCHULTZ XAVIER	3690	
		SORUM	3691	
		TENACE	3692	
		TUZHONG	3693	
		TYPHOON	3694	
		WANGEROOGE (TYPE 722B)	3695	
		ZENIT	3696	
		MAITO	3697	
		ARMEN	3698	
		UNDEFINED	3699 THROUGH 3737	
		ATR GENERAL	3738	
		TENACE	3739	
		UNDEFINED	3740 THROUGH 3748	
		ATS GENERAL	3749	
		EDENTON	3750	
		OKHTENSKY	3751	
		LANGE00G (TYPE 754)	3752	
		ARGUS	3753	
		UNDEFINED	3754 THROUGH 3762	
		AWT GENERAL	3763	
		UNDEFINED	3764	
		BASENTO	3765	
		FUZHOU (MODIFIED)	3766	
		KANGAN	3767	
		LEIZHOU (MODIFIED)	3768	
		LSIL	3769	
		MANYCH	3770	
		MINCIO	3771	

FIELD CODING FOR J12.7C2 (SHEET 148)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		PIAVE	3772	
		TEVERE	3773	
		ULUBAT	3774	
		VODA	3775	
		YW-83	3776	
		Z	3777	
		UNDEFINED	3778 THROUGH 3797	
		SERVICE CRAFT GENERAL	3798	
		BARGE, GENERAL	3799	
		YO GENERAL	3800	
		YOG GENERAL	3801	
		YHT GENERAL	3802	
		YRNS GENERAL	3803	
		YOS GENERAL	3804	
		YPK GENERAL	3805	
		YRR GENERAL	3806	
		YRB GENERAL	3807	
		YRST GENERAL	3808	
		YOM GENERAL	3809	
		YOSS GENERAL	3810	
		YW GENERAL	3811	
		UNDEFINED	3812 THROUGH 3827	
		YD GENERAL	3828	
		YM GENERAL	3829	
		YFD GENERAL	3830	
		YFP GENERAL	3831	
		YGT GENERAL	3832	
		YR GENERAL	3833	
		UNDEFINED	3834 THROUGH 3840	
		YFD GENERAL	3841	
		YFDB GENERAL	3842	
		YFDM GENERAL	3843	
		YFDL GENERAL	3844	
		UNDEFINED	3845 THROUGH 3850	
		YRD GENERAL	3851	
		YRDB GENERAL	3852	
		YRDM GENERAL	3853	
		YRDL GENERAL	3854	
		UNDEFINED	3855 THROUGH 3861	
		LIGHTER GENERAL	3862	
		YE GENERAL	3863	
		YF GENERAL	3864	

FIELD CODING FOR J12.7C2 (SHEET 149)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		YFC GENERAL	3865	
		YFR GENERAL	3866	
		YC GENERAL	3867	
		YFT GENERAL	3868	
		UNDEFINED	3869	THROUGH 3878
		YT GENERAL	3879	
		YTB GENERAL	3880	
		YTM GENERAL	3881	
		YTL GENERAL	3882	
		UNDEFINED	3883	THROUGH 3892
		YAGF GENERAL	3893	
		YAG GENERAL	3894	
		YV GENERAL	3895	
		YNG GENERAL	3896	
		YP GENERAL	3897	
		YFU GENERAL	3898	
		YAM GENERAL	3899	
		YNC GENERAL	3900	
		YLC GENERAL	3901	
		YVS GENERAL	3902	
		YRG GENERAL	3903	
		YAGT GENERAL	3904	
		YPT GENERAL	3905	
		YRC GENERAL	3906	
		YDT GENERAL	3907	
		YNT GENERAL	3908	
		YH GENERAL	3909	
		YFB GENERAL	3910	
		YTR GENERAL	3911	
		YFL GENERAL	3912	
		YAC GENERAL	3913	
		YSR GENERAL	3914	
		YSG GENERAL	3915	
		YDG GENERAL	3916	
		KHABAROV	3917	
		UNDEFINED	3918	THROUGH 3936
		TM GENERAL	3937	
		TMD GENERAL	3938	
		TMB GENERAL	3939	
		TMK GENERAL	3940	
		TMF GENERAL	3941	
		TMC GENERAL	3942	

FIELD CODING FOR J12.7C2 (SHEET 150)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2	(CONTINUED)	

		TMCS GENERAL	3943	
		TMWW GENERAL	3944	
		TMA GENERAL	3945	
		TMH GENERAL	3946	
		TMGB GENERAL	3947	
		TMI GENERAL	3948	
		TML GENERAL	3949	
		TMOT GENERAL	3950	
		TMM GENERAL	3951	
		TMP GENERAL	3952	
		TMFR GENERAL	3953	
		TMR GENERAL	3954	
		TMOR GENERAL	3955	
		TMOL GENERAL	3956	
		TME GENERAL	3957	
		TMGS GENERAL	3958	
		TMLS GENERAL	3959	
		TMS GENERAL	3960	
		TMOS GENERAL	3961	
		TMO GENERAL	3962	
		TMX GENERAL	3963	
		TMWT GENERAL	3964	
		UNDEFINED	3965	THROUGH 3989
		TMT GENERAL	3990	
		TMTR GENERAL	3991	
		TMTS GENERAL	3992	
		UNDEFINED	3993	THROUGH 4002
		TU GENERAL	4003	
		TUF GENERAL	4004	
		TUB GENERAL	4005	
		TUI GENERAL	4006	
		TUR GENERAL	4007	
		TUT GENERAL	4008	
		TUS GENERAL	4009	
		TUC GENERAL	4010	
		TUW GENERAL	4011	
		UNDEFINED	4012	THROUGH 4023
		TJ GENERAL	4024	
		TJF GENERAL	4025	
		TJC GENERAL	4026	
		TJCS GENERAL	4027	
		TJGB GENERAL	4028	

FIELD CODING FOR J12.7C2 (SHEET 151)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	003	SURFACE (MARITIME) AMBIGUOUS TYPE 2 -----	(CONTINUED)	
		UNDEFINED	4029 THROUGH 4038	
		TS GENERAL	4039	
		TSG GENERAL	4040	
		TSR GENERAL	4041	
		UNDEFINED	4042 THROUGH 4052	
		MPS GENERAL	4053	
		UNDEFINED	4054 THROUGH 4069	
		SURFACE SPECIFIC TYPE 1-25	4070 THROUGH 4094	
		RESET TO NO STATEMENT	4095	
809	003	SUBSURFACE (MARITIME) AMBIGUOUS TYPE 2 -----		IDENTIFIES THE SECOND MOST PROBABLE TARGET SPECIFIC TYPE IF AN ONBOARD CORRELATION PROCESS DETERMINES THAT THE SPECIFIC TYPE IS AMBIGUOUS. INFORMATION IN THIS FIELD SHALL BE DERIVED ONLY FROM ONBOARD SOURCES AS OPPOSED TO DATA LINK SOURCES.
		NO STATEMENT	0	
		SS GENERAL	1	
		ABTAO SS	2	
		DISUSED	3	
		DISUSED	4	
		UNDEFINED	5	
		DISUSED	6	
		GUPPY II SS	7	
		GUPPY IIA SS	8	
		GUPPY III SS	9	
		HAI LUNG SS	10	
		DISUSED	11	
		SAURO (TYPE 1081) SS	12	
		SAURO (IMPROVED) SS	13	
		TANG SS	14	
		TYPE SNA 72 SS	15	
		UZUSHIO SS	16	
		WALRUS SS	17	
		YUUSHIO SS	18	
		UNDEFINED	19	
		DISUSED	20	
		PELOSI SS	21	
		UNDEFINED	22 THROUGH 360	

FIELD CODING FOR J12.7C2 (SHEET 152)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
809	003	SUBSURFACE (MARITIME) AMBIGUOUS TYPE 2 -----	(CONTINUED)	
		SSB GENERAL	361	
		GOLF SSB	362	
		GOLF II SSB	363	
		GOLF III SSB	364	
		GOLF V SSB	365	
		UNDEFINED	366 THROUGH 440	
		SSBN GENERAL	441	
		BENJAMIN FRANKLIN SSBN	442	
		DELTA I SSBN	443	
		DELTA II SSBN	444	
		DELTA III SSBN	445	
		DELTA IV SSBN	446	
		HOTEL III SSBN	447	
		DISUSED	448	
		L'INFLEXIBLE SSBN	449	
		DISUSED	450	
		UNDEFINED	451	
		OHIO SSBN	452	
		RESOLUTION SSBN	453	
		TYPHOON SSBN	454	
		VANGUARD SSBN	455	
		YANKEE SSBN	456	
		YANKEE I SSBN	457	
		YANKEE II SSBN	458	
		XIA SSBN	459	
		LE TERRIBLE SSBN	460	
		UNDEFINED	461 THROUGH 720	
		SSN GENERAL	721	
		AKULA SSN	722	
		ALFA SSN	723	
		AMATHEPT SSN	724	
		CHARLIE/VICTOR SSGN/SSN	725	
		CHURCHILL SSN	726	
		ECHO/NOVEMBER SSGN/SSN	727	
		DISUSED	728	
		DISUSED	729	
		HAN SSN	730	
		HOTEL SSN	731	
		LOS ANGELES SSN	732	
		MIKE SSN	733	
		NARWHAL SSN	734	
		DISUSED	735	

FIELD CODING FOR J12.7C2 (SHEET 153)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
809	003	SUBSURFACE (MARITIME) AMBIGUOUS TYPE 2 -----	(CONTINUED)	
		RUBIS SSN	736	
		SEAWOLF SSN	737	
		SIERRA SSN	738	
		DISUSED	739	
		DISUSED	740	
		STURGEON SSN	741	
		SWIFTSURE SSN	742	
		TRAFALGAR SSN	743	
		DISUSED	744	
		VICTOR I SSN	745	
		VICTOR II SSN	746	
		VICTOR III SSN	747	
		YANKEE SSN	748	
		VIRGINIA SSN	749	
		UNDEFINED	750 THROUGH 1200	
		SSG GENERAL	1201	
		JULIETT SSG	1202	
		UNDEFINED	1203 THROUGH 1245	
		SSGN GENERAL	1246	
		CHARLIE I SSGN	1247	
		CHARLIE II SSGN	1248	
		ECHO II SSGN	1249	
		OSCAR SSGN	1250	
		PAPA SSGN	1251	
		UNDEFINED	1252 THROUGH 1345	
		SSK GENERAL	1346	
		AGOSTA SSK	1347	
		UNDEFINED	1348	
		FOXTROT SSK	1349	
		HEROJ SSK	1350	
		KILO SSK	1351	
		MING SSK	1352	
		NARVAL SSK	1353	
		DISUSED	1354 THROUGH 1355	
		ROMEO SSK	1356	
		SAVA SSK	1357	
		SUTJESKA SSK	1358	
		TANGO SSK	1359	
		UPHOLDER SSK	1360	
		WHISKEY SSK	1361	
		WHISKEY V SSK	1362	
		ZULU IV SSK	1363	

FIELD CODING FOR J12.7C2 (SHEET 154)

DFI DUI DUI/DI NAME DI BIT CODE DUI/DI EXPLANATION

809 003 SUBSURFACE (MARITIME) (CONTINUED)
 AMBIGUOUS TYPE 2

 DORIS SSK 1364
 VICTORIA SSK 1365
 TYPE 212 SSK 1366
 UNDEFINED 1367 THROUGH 1665
 SSC GENERAL 1666
 DELFINEN SSC 1667
 DRAKEN SSC 1668
 NAECKEN SSC 1669
 NARHVALEN SSC 1670
 SJOORMEN SSC 1671
 TOTI TYPE 1075 SSC 1672
 TYPE 205 SSC 1673
 TYPE 206 SSC 1674
 KOBLEN SSC 1675
 TYPE 209 (TYPE 1100) SSC 1676
 TYPE 209 (TYPE 1200) SSC 1677
 TYPE 209 (TYPE 1300) SSC 1678
 TYPE 209 (TYPE 1400) SSC 1679
 TYPE 209 (TYPE 1500) SSC 1680
 ULA SSC 1681
 TYPE 211 SSC 1682
 VASTERGOETLAND SSC 1683
 TYPE 206A SSC 1684
 UNDEFINED 1685 THROUGH 1945
 SSA GENERAL 1946
 BRAVO SSA 1947
 DOLPHIN (AGSS) SSA 1948
 GOLF I SSA 1949
 GOLF I (MODIFIED) SSA 1950
 GOLF II SSA 1951
 INDIA SSA 1952
 LIMA SSA 1953
 ROMEO SSA 1954
 ZULU SSA 1955
 UNDEFINED 1956 THROUGH 4069
 SUBSURFACE SPECIFIC 4070 THROUGH 4094
 TYPE 1-25
 RESET TO NO STATEMENT 4095

810 003 LAND (GROUND) AMBIGUOUS TYPE 2

IDENTIFIES THE SECOND MOST
 PROBABLE TARGET SPECIFIC TYPE IF
 AN ONBOARD CORRELATION PROCESS

FIELD CODING FOR J12.7C2

(SHEET 155)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	003	LAND (GROUND) AMBIGUOUS TYPE 2 (CONTINUED)		

DETERMINES THAT THE SPECIFIC TYPE
IS AMBIGUOUS. INFORMATION IN
THIS FIELD SHALL BE DERIVED ONLY
FROM ONBOARD SOURCES AS OPPOSED TO
DATA LINK SOURCES.

NO STATEMENT	0
TOW	1
DRAGON	2
LANCE	3
SHILLEAGH	4
SERGEANT	5
AMMUNITION	6
POL	7
OBSERVATION POSTS	8
RADIO DIRECTION FINDER	9
RIVER	10
STREAM	11
LAKE	12
MARSH/SWAMP	13
MOUNTAIN	14
HILLTOP	15
RIDGE	16
DEPRESSION	17
VALLEY	18
CAVE	19
BRIDGE	20
DAM	21
BUILDING	22
VILLAGE	23
TOWN	24
ROAD INTERSECTION	25
HOSPITAL	26
HAWK	27
I-HAWK	28
PATRIOT	29
NIKE	30
REDEYE	31
STINKER	32
HELLFIRE	33
PERSHING	34
JEEP	35
CAR	36
MOTORCYCLE	37

5.2-1164

MIL-STD-6016B

FIELD CODING FOR J12.7C2 (SHEET 156)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	003	LAND (GROUND) AMBIGUOUS TYPE 2 (CONTINUED)		

		BICYCLE	38	
		AMPHIBIOUS VEHICLE	39	
		RIVER CROSSING EQUIPMENT	40	
		MECHANIZED MINE SWEEPER	41	
		MOBILE RADAR	42	
		SMOKE GENERATOR	43	
		(SSSB) SHIP SHORE SHIP	44	
		BUFFER		
		(RADIL) ROCC AWACS	45	
		DIGITAL INTERFACE LINK		
		(ASIT) ADAPTABLE SURFACE	46	
		INTERFACE TERMINAL		
		(AEGIS) AEW GROUND	47	
		INTERFACE SEGMENT		
		AMBULANCE	48	
		BIOLOGICAL WEAPONS	49	
		CHEMICAL WEAPONS	50	
		NUCLEAR WEAPONS	51	
		ENGINEER VEHICLES	52	
		GENERATOR	53	
		JAMMERS	54	
		MAINTENANCE VEHICLE	55	
		MULTIPLE ROCKET LAUNCHER	56	
		RADIO	57	
		REMOTE SENSOR	58	
		SELF PROPELLED ARTILLERY	59	
		TACTICAL BRIDGE	60	
		TOWED ARTILLERY GUN	61	
		RECOILLESS RIFLE	62	
		(TACCP) TACTICAL COMMAND	63	
		POST		
		BRIGADE	64	
		CORPS	65	
		GROUP	66	
		DIVISION	67	
		REGIMENT	68	
		BATTALION	69	
		COMPANY	70	
		PLATOON	71	
		SQUADRON	72	
		AIRBASE	73	
		WING	74	
		ANTI-AIRCRAFT GUN	75	

FIELD CODING FOR J12.7C2

(SHEET 157)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	003	LAND (GROUND) AMBIGUOUS TYPE 2 (CONTINUED)		

		AIR DEFENSE ARTILLERY	76	
		GUN		
		MORTAR	77	
		FLAMETHROWER	78	
		TSC/MOCC/MARITIME	79	
		HEADQUARTERS		
		MAIN BATTLE TANK	80	
		MEDIUM TANK	81	
		LIGHT TANK	82	
		TRAIN	83	
		ARMORED PERSONNEL	84	
		VEHICLE		
		ARMORED INFANTRY	85	
		FIGHTING VEHICLE		
		LIGHT TRUCK	86	
		MEDIUM TRUCK	87	
		HEAVY TRUCK	88	
		TANK TRANSPORTER	89	
		DUMMY	90	
		TRAP	91	
		POINT TARGET	92	
		EA SITE	93	
		ARMORED PERSONNEL	94	
		CARRIER		
		ARMORED INFANTRY	95	
		FIGHTING VEHICLE		
		GCI SITE	96	
		CRC	97	
		TACC (AF)	98	
		CRP	99	
		TACC (MC)	100	
		MPC	101	
		TAOC	102	
		AADCCS (AN/TSQ-73)	103	
		DASC	104	
		FACP	105	
		FASC	106	
		AADCP	107	
		ASRT	108	
		NCC	109	
		RCC	110	
		ROCC	111	
		DC	112	

5.2-1166

MIL-STD-6016B

FIELD CODING FOR J12.7C2 (SHEET 158)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	003	LAND (GROUND) AMBIGUOUS TYPE 2 (CONTINUED)		

		WOC	113	
		(ASOC) AIR SUPPORT	114	
		OPERATIONS CENTER		
		(TCO) TACTICAL COMBAT	115	
		OPERATIONS CENTER		
		(TOC) TACTICAL	116	
		OPERATIONS CENTER		
		(ARMY)		
		CHAPPARAL	117	
		FIRE DIRECTION CENTER	118	
		FIRE UNIT	119	
		DIVARTY	120	
		BATTERY	121	
		SELF-PROPELLED ARTILLERY	122	
		(GOC) GROUND OPERATIONS	123	
		CENTER		
		(ICC) INFORMATION	124	
		COORDINATION CENTER		
		(BOC) BATTERY OPERATIONS	125	
		CENTER		
		(ECS) ENGAGEMENT CONTROL	126	
		STATION		
		(PCP) PLATOON COMMAND	127	
		POST		
		(CRG) COMMUNICATIONS	128	
		RELAY GROUP		
		TUNNELS	129	
		RAILYARDS	130	
		BENCHMARK	131	
		TROOP	132	
		LANDING ZONE	133	
		DROP ZONE	134	
		ASSEMBLY OR STAGING AREA	135	
		DECONTAMINATION SITE	136	
		RE-ENTRY POINT/LINE	137	
		CROSSING AREA FOR		
		RECON PATROLS		
		SAM	138	
		SSM	139	
		ANTI-TANK WEAPON	140	
		DIRECT SUPPORT	141	
		GENERAL SUPPORT	142	
		INTERCEPTION	143	

FIELD CODING FOR J12.7C2

(SHEET 159)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	003	LAND (GROUND) AMBIGUOUS TYPE 2 (CONTINUED)		

		BLOCKING	144	
		REINFORCING	145	
		REDEPLOYMENT	146	
		POLICING	147	
		INTRUDING	148	
		PREPARING BARRIER	149	
		DUMPING EQUIPMENT	150	
		RELIEF	151	
		CONVOY	152	
		ANTI-AIRCRAFT	153	
		AIR DEFENSE ARTILLERY	154	
		ARTILLERY	155	
		SURVEILLANCE	156	
		PICKETING	157	
		LOGISTICS SUPPORT	158	
		SEARCH	159	
		DIRECT ARTILLERY SUPPORT	160	
		GENERAL ARTILLERY	161	
		SUPPORT		
		MAINTAINING LINE OF	162	
		COMMUNICATION		
		COMMITTING	163	
		COUNTER-ATTACK	164	
		ELECTRONIC WARFARE	165	
		THREATEN	166	
		DESTROY	167	
		CONTACT	168	
		EVALUATION	169	
		TRANSPORTER	170	
		ARMORED VEHICLE	171	
		GUN	172	
		HALF TRACK	173	
		COMMUNICATIONS EQUIPMENT	174	
		TARGET	175	
		AIR DEFENSE SITE	176	
		FIM-92 STINGER	177	
		NIM-23 HAWK	178	
		MIM-42 REDEYE	179	
		MIM-72 CHAPARRAL	180	
		MIM-104 PATRIOT	181	
		RIM-2 TERRIER	182	
		RIM-7 SEA SPARROW	183	
		RIM-8 TALOS	184	

FIELD CODING FOR J12.7C2

(SHEET 160)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	003	LAND (GROUND) AMBIGUOUS TYPE 2 (CONTINUED)		

		RIM-24 TARTAR	185	
		RIM-66 STANDARD MISSILE	186	
		RIM-67 STANDARD MISSILE	187	
		BLOWPIPE	188	
		DISUSED	189 THROUGH 190	
		SEA DART	191	
		DISUSED	192 THROUGH 193	
		CROTALE	194	
		RAPIER	195	
		RBS-70/GIRAFFE	196	
		SAM BLOODHOUND	197	
		SAM ROLAND	198	
		SA-2 GUIDELINE	199	
		SA-3 GOA	200	
		SA-4 GANEF	201	
		SA-N-3 GOBLET	202	
		SA-5 GAMMON	203	
		SA-N-4 GECKO	204	
		SA-6 GAINFUL	205	
		SA-N-6 GRUMBLE	206	
		SA-7 GRAIL	207	
		SA-8 GECKO	208	
		SA-9 GASKIN	209	
		SA-10 GRUMBLE	210	
		SA-11 GADFLY	211	
		SA-12	212	
		SA-13 GOPHER	213	
		MISTRAL	214	
		SA-N-7 GADFLY	215	
		SA-N-8 GREMLIN	216	
		SA-14 GREMLIN	217	
		SA-16 GIMLET	218	
		SA-X-17	219	
		TOC (THAAD)	220	
		SSI (THAAD)	221	
		LCS (THAAD)	222	
		LAUNCHER (THAAD)	223	
		TMD-GBR (THAAD)	224	
		JTAGS	225	
		ADTOC/BN	226	
		ADTOC/BDE	227	
		ADCP	228	
		SM-2 BLOCK II	229	

5.2-1169

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 161)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	003	LAND (GROUND) AMBIGUOUS TYPE 2 (CONTINUED)		

		SM-2 BLOCK III	230	
		SM-2 BLOCK IIIA	231	
		SM-2 BLOCK IIIB	232	
		SM-2 BLOCK IV	233	
		SM-2 BLOCK IVA	234	
		SM-3 LEAP	235	
		SA-N-5 GRAIL	236	
		SA-N-11 GRISOM	237	
		SA-12A GLADIATOR	238	
		SA-12B GIANT	239	
		SA-14 GREMLIN	240	
		SA-15 GAUNTLET	241	
		SA-17 GRIZZLY	242	
		SA-N-12 GRIZZLY	243	
		SA-18 GROUSE	244	
		SA-19 GRISOM	245	
		RIM-116 RAM	246	
		ADATS	247	
		JAVELIN	248	
		STARBURST	249	
		STARSTREAK	250	
		ASPIDE	251	
		FRONT DOOR	252	
		ROLAND II	253	
		AKASH	254	
		ANZA	255	
		ANZA II	256	
		CSA-1	257	
		CSA-2	258	
		CSA-4	259	
		CSA-5	260	
		FM-80	261	
		HN-5	262	
		NK-7	263	
		NK-16	264	
		PANTZYR	265	
		RAPIER 2000/JERNAS	266	
		RBS-90	267	
		SAKR	268	
		SAVA	269	
		SHANINE	270	
		SKYGUARD ASPIDE	271	
		SPADA	272	

5.2-1170

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 162)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	003	LAND (GROUND) AMBIGUOUS TYPE 2 (CONTINUED)		

		TAM SAM	273	
		TIGERCAT	274	
		VANGUARD	275	
		SA-N-1 GOA	276	
		SA-N-9 GAUNTLET	277	
		SA-N-10	278	
		ALBATROS/ASPIDE	279	
		SM-1	280	
		SA-2 IRAQ MOD	281	
		SA-2 NORTH KOREA RO	282	
		AEGIS-TI	283	
		MASURGS	284	
		ROCK CAKE	285	
		SEA INDIGO	286	
		TANSAM	287	
		TOKEN A/D	288	
		GUARDSMAN	289	
		SILKWORM	290	
		SNOW DRIFT 11/17	291	
		TIGER S	292	
		TIGER G	293	
		TUBE ARM SA-11	294	
		SEACAT 262/903/904	295	
		AN/MPQ-4	296	
		AN-TPQ-36	297	
		AN/TPS-25	298	
		CYMBERLINE	299	
		PORK TROUGH 1	300	
		RASIT	301	
		SNAR-6	302	
		TALL MIKE	303	
		AN/FPN-33/36/40	304	
		AN/TPN-12/17	305	
		CPN-4, FPN-16/22	306	
		RP-2E	307	
		RP-4G	308	
		THD-1010/1013	309	
		TPN-8/14/18TSQ-7	310	
		TWO SPOT	311	
		CSA-X-2	312	
		ASR-0	313	
		FALCON-G	314	
		MARCON LN66TPS66	315	

5.2-1171

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 163)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	003	LAND (GROUND) AMBIGUOUS TYPE 2 (CONTINUED)		

		SHEET BEND	316	
		WALL RUST A/B	317	
		DON-2	318	
		DONKAY/PALM FROND	319	
		EYE SHIELD	320	
		MARELD	321	
		PEEL PAIR	322	
		POT HEAD	323	
		RACAL-DECCA	324	
		RICE FIELD	325	
		RICE SCREEN	326	
		RICE CUP	327	
		SQUARE TIE	328	
		SS-N-2	329	
		STRUT CURVE	330	
		STRUT PAIR	331	
		BOFI	332	
		CORN CAN	333	
		DRUM TILT	334	
		ELDORADO	335	
		FLAP WHEEL	336	
		FLEDERMAUS	337	
		FLYCATCHER	338	
		GEPARD	339	
		GUN DISH	340	
		SPAAMG	341	
		TEAMPLAY	342	
		TEAMWORK	343	
		VULCAN	344	
		9LV 200	345	
		AN/SPG-50	346	
		BASS TILT	347	
		GOALKEEPER	348	
		HAWK SCREECH	349	
		KITE SCREECH A/B	350	
		OWL SCREECH	351	
		MARK 68 FCS	352	
		MK 57/63 GFCS	353	
		MK-86 GFCS	354	
		MUFF COB	355	
		SIGNAAL STIR 180	356	
		SUN VISOR	357	
		TOP BOW	358	

5.2-1172

MIL-STD-6016B

FIELD CODING FOR J12.7C2 (SHEET 164)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	003	LAND (GROUND) AMBIGUOUS TYPE 2 (CONTINUED)		

		TYPE 341	359	
		VEGA	360	
		WM-20 SERIES	361	
		MARCONI S613	362	
		THIN SKIN	363	
		AN/FPS-77	364	
		MRL-1	365	
		MRL-4/5	366	
		BIG BIRD	367	
		SIDE NET	368	
		ODD LOT/PAIR/GROUP	369	
		FIRE WHEEL/MOD	370	
		BARLOCK	371	
		FIRECAN/WHIFF	372	
		GIN SLING	373	
		FRUSKA GORA	374	
		TIN SHIELD	375	
		BIG BAR/MESH	376	
		SS-N-S SCOOP PAIR	377	
		SGR-105 DA-01/00	378	
		CROSS SLOT	379	
		BACK NET/TRAP	380	
		GATE POLE/HIGH/POST	381	
		TOP LOT	382	
		RICE CAKE	383	
		JY-14/9	384	
		TIN TRAP	385	
		HEAD NET A/B/C	386	
		SLIM/SEA/HAIR NET	387	
		LOW SIEVE	388	
		EGG CUP	389	
		CUT WEB	390	
		SKYWATCH	391	
		HALF PLATE	392	
		SKIN HEAD	393	
		SIEVE FAMILY	394	
		SO-A	395	
		HIGH SHELL	396	
		AN/FPS-6/89	397	
		DECCA HF200	398	
		MARCONI 5244	399	
		TYPE 88 MK 1	400	
		MARCONI S-247	401	

FIELD CODING FOR J12.7C2

(SHEET 165)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	003	LAND (GROUND) AMBIGUOUS TYPE 2 (CONTINUED)		

		AN/MPN-11	402	
		RAT-31S	403	
		AA4 MK 6/7	404	
		AN/TPS-43	405	
		SCR-584	406	
		AN/TPS-48	407	
		MARCONI S-1006/269	408	
		PALMIER	409	
		FIREFINDER LR	410	
		VOLEX III/IV	411	
		THD-1940	412	
		HADR (HR-3000)	413	
		AN/RPS-70/72/75	414	
		MPDR-18/S	415	
		WATCHMAN	416	
		MARCONI S-631/647	417	
		MARCONI S-706/711/712	418	
		AN/TPS-73	419	
		TRS-22XX	420	
		AN/SPS-8	421	
		DECCA AWS-1	422	
		MK-26	423	
		AN/SPS-48	424	
		RAN-7S	425	
		SEA TIGER	426	
		DA-08/2LS	427	
		AWS-9 (TYPE 996)	428	
		DA-05/00	429	
		MPDR-45	430	
		TOP STEER/PLATE	431	
		STRIKE OUT	432	
		SPONGE CAKE	433	
		NC1 ROLAND	434	
		NC1 MISTRAL	435	
		FDOC	436	
		MCT	437	
		CETAC	438	
		ISARD	439	
		UNDEFINED	440 THROUGH 4000	
		WAYPOINT	4001	
		STRIKE INITIAL POINT	4002	
		UNDEFINED	4003 THROUGH 4093	
		RESET TO NO STATEMENT	4094	

5.2-1174

MIL-STD-6016B

FIELD CODING FOR J12.7C2

(SHEET 166)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	003	LAND (GROUND) AMBIGUOUS TYPE 2 (CONTINUED) ----- UNDEFINED	4095	
369	003	AMBIGUOUS TYPE 1 PROBABILITY ----- 0 THROUGH 1 NO STATEMENT	0 THROUGH 510 511	EXPRESSES THE PROBABILITY THAT THE SPECIFIC TYPE IS THE ALTERNATIVE SPECIFIC TYPE PROVIDED IN THE AMBIGUOUS TYPE 1 FIELD. THE PROBABILITY SHALL REFLECT BOTH THE CONFIDENCE IN THE TYPE IDENTIFICATION SOURCES AND THE CONFIDENCE THAT THE TYPE IDENTIFICATION IS CORRECTLY CORRELATED TO THIS TARGET. INFORMATION IN THIS FIELD SHALL BE DERIVED ONLY FROM ONBOARD SOURCES AS OPPOSED TO DATA LINK SOURCES. IN 0.00196 INCREMENTS.
369	004	AMBIGUOUS TYPE 2 PROBABILITY ----- 0 THROUGH 1 NO STATEMENT	0 THROUGH 510 511	EXPRESSES THE PROBABILITY THAT THE SPECIFIC TYPE IS THE ALTERNATIVE SPECIFIC TYPE PROVIDED IN THE AMBIGUOUS TYPE 2 FIELD. THE PROBABILITY SHALL REFLECT BOTH THE CONFIDENCE IN THE TYPE IDENTIFICATION SOURCES AND THE CONFIDENCE THAT THE TYPE IDENTIFICATION IS CORRECTLY CORRELATED TO THIS TARGET. INFORMATION IN THIS FIELD SHALL BE DERIVED ONLY FROM ONBOARD SOURCES AS OPPOSED TO DATA LINK SOURCES. IN 0.00196 INCREMENTS.
275	004	ENVIRONMENT/CATEGORY ----- NO STATEMENT/UNKNOWN SPACE AIR SURFACE (MARITIME) SUBSURFACE (MARITIME)	0 1 2 3 4	IDENTIFIES THE ENVIRONMENT/CATEGORY OF A JTIDS/MIDS UNIT OR TRACK.

5.2-1175

MIL-STD-6016B

FIELD CODING FOR J12.7C2 (SHEET 167)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
275	004	ENVIRONMENT/CATEGORY	(CONTINUED)	

		LAND (GROUND)	5	
		UNDEFINED	6 THROUGH 7	

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J12.7C3

WORD TITLE: TARGET BEARING CONTINUATION WORD THREE

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00	
<---					:	OBSERVER VELOCITY DOWN										:	CONTINUATION WORD					:	WORD		:
					:											:	LABEL					:	FORMAT		:
					:	12										:	5					:	2		:

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

SPARE

51																							
----	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50	
:																					---
:																					
:																					

WORD DESCRIPTION

WORD NUMBER: J12.7C3

WORD TITLE: TARGET BEARING CONTINUATION WORD THREE

REFERENCE		BIT #		RESOLUTION, CODING, ETC
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	00011
1401 003	OBSERVER VELOCITY DOWN	7-	18 12	
756 051	SPARE	19-	69 51	

FIELD CODING FOR J12.7C3 (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1401	003	OBSERVER VELOCITY DOWN -----		PROVIDES THE TARGET OBSERVER'S VELOCITY ALONG THE LOCAL DOWN AXIS, DEFINED AT THE LATITUDE AND LONGITUDE IN THE J12.7I WORD. IN 1 FT/SEC INCREMENTS.
		0 THROUGH 2047 FEET PER SECOND	0 THROUGH 2047	
		NO STATEMENT	2048	
		-2047 THROUGH -1 FEET PER SECOND	2049 THROUGH 4095	IN 1 FT/SEC INCREMENTS.
756	051	SPARE -----		

TABLE J13-1. J13 Platform and System Status Word Applicability Table

INITIAL WORD	SUBLABEL							
	J13.0I AIRFIELD STATUS		J13.2I AIR PLATFORM AND SYSTEM STATUS	J13.3I SURFACE (MARITIME) PLATFORM AND SYSTEM STATUS	J13.4I SUBSURFACE (MARITIME) PLATFORM AND SYSTEM STATUS	J13.5I LAND (GROUND) PLATFORM AND SYSTEM STATUS		
EXTENSION WORD - 0	J13.0E0							
CONTINUATION WORD - 0								
1	J13.0C1 AIRFIELD WEATHER		J13.2C1 COMMAND AND CONTROL STATUS	J13.3C1 COMMAND AND CONTROL STATUS	J13.4C1 CONTINUATION WORD 1	J13.5C1 EQUIPMENT STATUS		
2	J13.0C2 AIRFIELD LOGISTICS		J13.2C2 STORES STATUS	J13.3C2 EQUIPMENT STATUS	J13.4C2 CONTINUATION WORD 2	J13.5C2 ELECTRONIC WARFARE STATUS		
3			J13.2C3 ASW STATUS	J13.3C3 ELECTRONIC WARFARE STATUS				
4			J13.2C4 ELECTRONIC WARFARE STATUS	J13.3C4 COMMUNICATIONS STATUS				
5			J13.2C5 EQUIPMENT STATUS	J13.3C5 FIRST ADDITIONAL MISSILE STATUS				
6			J13.2C6 AIR CONTROL STATUS	J13.3C6 SECOND ADDITIONAL MISSILE STATUS				
7			J13.2C7 ADDITIONAL STORES STATUS	J13.3C7 THIRD ADDITIONAL MISSILE STATUS				
...								
31								

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

J13.0 MESSAGE SUMMARY

PURPOSE

The J13.0 Airfield Status message is used to report operational status of airfields, runways, airfield facilities, and aircraft carrier flight decks.

DATA ELEMENT SUMMARY

<u>J13.0I</u>		<u>J13.0E0 (Continued)</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	DESIGNATED FLYING COURSE	9
LABEL, J-SERIES	5		
SUBLABEL, J-SERIES	3	<u>J13.0C1</u>	
MESSAGE LENGTH INDICATOR	3	DATA ELEMENT	# BITS
AIRFIELD STATUS	1	WORD FORMAT	2
AIR RAID STATE	2	CONTINUATION WORD LABEL	5
NUCLEAR CONTAMINATION INDICATOR	1	WIND DIRECTION	7
BIOLOGICAL CONTAMINATION INDICATOR	1	WIND SPEED	7
CHEMICAL CONTAMINATION INDICATOR	1	WIND GUST INCREMENT	4
TRACK NUMBER, REFERENCE	19	CLOUD COVER, 1	2
BASE WEATHER STATE	3	CLOUD HEIGHT, 1	6
CRASH SERVICE	3	CLOUD COVER, 2	2
SHORADEZ	1	CLOUD HEIGHT, 2	6
TIME OF OBSERVATION, HOUR	5	CLOUD COVER, 3	2
TIME OF OBSERVATION, MINUTE	6	CLOUD HEIGHT, 3	6
QNH	7	VISIBILITY	7
LANDING APPROACH CONDITION	3	BASE ACTUAL WEATHER	5
SECONDARY RUNWAY INDICATOR	1	BASE ACTUAL WEATHER DESCRIPTOR	3
SPARE	3	BASE ACTUAL WEATHER INTENSITY/PROXIMITY	3
		WIND SHEAR INDICATOR	1
		SPARE	2

<u>J13.0E0</u>		<u>J13.0C2</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	WORD FORMAT	2
ICAO CODE	20	CONTINUATION WORD LABEL	5
ACTIVE RUNWAY DIRECTION	6	AVTUR	1
ACTIVE RUNWAY AVAILABLE LENGTH	6	LIQUID OXYGEN	1
ACTIVE RUNWAY STATUS	3	NITROGEN	1
ACTIVE RUNWAY GCA/FLIGHT DECK PAR	1	AIM-9L AIR-TO-AIR MISSILE	1
ACTIVE RUNWAY ILS/FLIGHT DECK PRECISION APPROACH AID (MADGE)	1	AIM-9M AIR-TO-AIR MISSILE	1
ACTIVE RUNWAY APPROACH LIGHTING	3	AIM-9P AIR-TO-AIR MISSILE	1
ACTIVE RUNWAY ARRESTER BARRIER	1	SKY FLASH AIR-TO-AIR MISSILE	1
ACTIVE RUNWAY ARRESTER WIRES	3	AMRAAM AIR-TO-AIR MISSILE	1
ACTIVE RUNWAY BRAKING ACTION	3	ASRAAM AIR-TO-AIR MISSILE	1
ACTIVE RUNWAY VISUAL RANGE	4	MAGIC I AIR-TO-AIR MISSILE	1
QFE	7	MAGIC II AIR-TO-AIR MISSILE	1
FLIGHT DECK GLIDE PATH INDICATOR	1	SUPER 530 AIR-TO-AIR MISSILE	1
		SUPER 530D AIR-TO-AIR MISSILE	1
		MICA AIR-TO-AIR MISSILE	1
		TBD AIR-TO-AIR MISSILE	1
		TBD AIR-TO-AIR MISSILE	1
		TBD AIR-TO-AIR MISSILE	1

MIL-STD-6016B

J13.0 MESSAGE SUMMARY (Continued)

DATA ELEMENT SUMMARY (Continued)

J13.0C2 (Continued)	
DATA ELEMENT	# BITS
TBD AIR-TO-AIR MISSILE	1
DURANDAL AIR-TO-SURFACE MISSILE	1
BAP 100 AIR-TO-SURFACE MISSILE	1
TBD AIR-TO-SURFACE MISSILE	1
TBD AIR-TO-SURFACE MISSILE	1
TBD AIR-TO-SURFACE MISSILE	1
TBD AIR-TO-SURFACE MISSILE	1
ANTI-SUBMARINE DEPTH CHARGE	1
NDB	1
CONVENTIONAL 500 POUND BOMB	1
CONVENTIONAL 1000 POUND BOMB	1
20 MILLIMETER AMMUNITION	1
27 MILLIMETER AMMUNITION	1
30 MILLIMETER AMMUNITION	1
SPARE	32

MIL-STD-6016B

J13.0 TRANSMIT/RECEIVE RULES

TITLE: Airfield Status Message

TRANSMIT RULES

1. The J13.0B Airfield Status Basic message consists of the J13.0I Airfield Status initial word and the J13.0E0 Airfield Status extension word.

2. To report airfield or carrier flight deck status, the J13.0 Airfield Status message shall be transmitted periodically at an RRN of 1 (6.4 minutes, 4.8-8 minutes interval), or when a significant change of airfield/flight deck information occurs, in one of the following word sequences:

a. A J13.0I/J13.0E0 word sequence if the airfield/flight deck is non-operational.

b. A J13.0I/J13.0E0/J13.0C1 word sequence if the airfield/flight deck is operational.

3. A J13.0C2 word shall be added to the report to form a J13.0I/J13.0E0/J13.0C1/J13.0C2 word sequence for an operational airfield/flight deck when logistics information is held:

a. Every third transmission.

b. When a significant change in logistics data occurs.

If the reporting unit is limited to 3 words per time slot, the J13.0C2 word shall replace the J13.0C1 word to form a J13.0I/J13.0E0/J13.0C2 word sequence to be transmitted as in 3a and 3b.

4. All fields of the J13.0C1 word for which currently valid data is not held shall be set, on transmission, to their No Statement/default value.

MIL-STD-6016B

J13.0 TRANSMIT/RECEIVE RULES (Continued)

RECEIVE RULES

1. No reliance should be placed on weather data which has a time of observation whose hour is not equal to the hour of the current time of day, e.g., after 1000 hours any weather data with a time of observation earlier than 1000 hours is no longer valid.
2. The Time of Observation, Hour and Time of Observation, Minute fields refer only to the weather reported in the message, and shall not be interpreted if the J13.0C1 word is not present in a transmission.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J13.0I

WORD TITLE: AIRFIELD STATUS INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00		
					:CHM: BIO:NUC:			AIR	:AFD:	MESSAGE	:SUBLABEL,	:											:WORD	:		
<---					:IND: IND:IND:			RAID	:STS:	LENGTH	:J-SERIES	:	LABEL, J-SERIES					:	:FORMAT					:		
					:	:	:	:STATE	:	:INDICATOR	:	:						:	:	:	:					
					:	1	:	1	:	1	:	2	:	1	:	3	:	3	:	5	:	2	:			
:	49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25	
:	TIME OF				:	SHR:	CRASH		:	BASE		:	TRACK NUMBER, REFERENCE												:	
:	OBSERVATION, HOUR				:	DEZ:	SERVICE		:	WEATHER		:													:	
:					:	:			:	STATE		:													:	
:	5				:	1	:	3	:	3		:	19												:	
					:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50	
					:	SPARE			:	:	LANDING		:	QNH					:	TIME OF OBSERVATION,					:	
					:				:	:	APPROACH		:						:	MINUTE					:	
					:				:	:	CONDITION		:						:						:	
					:	3			:	1	:	3		:	7					:	6					:

WORD DESCRIPTION

WORD NUMBER: J13.0I

WORD TITLE: AIRFIELD STATUS INITIAL WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	00
270	004	LABEL, J-SERIES	2-	6 5	01101
271	005	SUBLABEL, J-SERIES	7-	9 3	000
800	001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
1865	001	AIRFIELD STATUS (AFD STS)	13	1	
1866	001	AIR RAID STATE (ARD STE)	14-	15 2	
1867	001	NUCLEAR CONTAMINATION INDICATOR (NUC IND)	16	1	
1867	002	BIOLOGICAL CONTAMINATION INDICATOR (BIO IND)	17	1	SAME CODING AS FOR BIT 16.
1867	003	CHEMICAL CONTAMINATION INDICATOR (CHM IND)	18	1	SAME CODING AS FOR BIT 16.
769	002	TRACK NUMBER, REFERENCE	19-	37 19	
1869	001	BASE WEATHER STATE (BW STE)	38-	40 3	
1870	002	CRASH SERVICE	41-	43 3	
1871	001	SHORADEZ (SHR DEZ)	44	1	
792	003	TIME OF OBSERVATION, HOUR	45-	49 5	SAME CODING AS FOR BIT 63.
797	003	TIME OF OBSERVATION, MINUTE (TOMIN)	50-	55 6	SAME CODING AS FOR BIT 63.
789	001	QNH	56-	62 7	SAME CODING AS FOR BIT 63.
1545	001	LANDING APPROACH CONDITION	63-	65 3	
1888	001	SECONDARY RUNWAY INDICATOR (SRI)	66	1	
756	003	SPARE	67-	69 3	

FIELD CODING FOR J13.0I (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1865	001	AIRFIELD STATUS		

		NOT OPERATIONAL	0	
		OPERATIONAL	1	
1866	001	AIR RAID STATE		

		NO STATEMENT	0	
		WHITE	1	
		YELLOW	2	
		RED	3	
1867	001	NUCLEAR CONTAMINATION INDICATOR		

		NOT CONTAMINATED	0	
		CONTAMINATED	1	
769	002	TRACK NUMBER, REFERENCE		

A REFERENCE NUMBER USED TO ASSOCIATE INFORMATION AND DIRECTIVES WITH THE TRACK.

THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE-BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANNN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.

FIELD CODING FOR J13.0I (SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE	(CONTINUED)	

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6
00111	7
01000	A
01001	B
01010	C
01011	D
01100	E
01101	F
01110	G
01111	H
10000	J
10001	K
10010	L
10011	M
10100	N
10101	P
10110	Q
10111	R
11000	S
11001	T
11010	U
11011	V
11100	W
11101	X
11110	Y
11111	Z

00000	0	NO STATEMENT.
00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
00077	63	ILLEGAL.
00100-00175	64 THROUGH 125	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
00176	126	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
00177	127	COLLECTIVE ADDRESS.

FIELD CODING FOR J13.0I

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		00200-07776	128 THROUGH 4094	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		07777 0A000-0Z777	4095 4096 THROUGH 16383	ILLEGAL. ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		10000-17777	16384 THROUGH 20479	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		20000-27777	32768 THROUGH 36863	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE

FIELD CODING FOR J13.0I

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		50000-57777	81920 THROUGH 86015	USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		70000-77776	114688 THROUGH 118782	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
1869	001	BASE WEATHER STATE -----		
		NO STATEMENT	0	
		RED	1	
		AMBER	2	
		YELLOW	3	
		GREEN	4	
		WHITE	5	
		BLUE	6	
		UNDEFINED	7	

FIELD CODING FOR J13.0I

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1870	002	CRASH SERVICE -----		
		NO STATEMENT	0	
		FULL	1	
		LIMITED	2	
		NONE	3	
		UNDEFINED	4 THROUGH 7	
1871	001	SHORADEZ -----		
		INACTIVE	0	
		ACTIVE	1	
792	003	TIME OF OBSERVATION, HOUR -----		THE HOUR OF THE DAY REPORTED AS THE OFFICIAL TIME OF OBSERVATION OF THE WEATHER INFORMATION.
		0 HOUR	0	
		1 THROUGH 23 HOURS	1 THROUGH 23	IN ONE HOUR INCREMENTS.
		ILLEGAL	24 THROUGH 30	
		NO STATEMENT	31	
797	003	TIME OF OBSERVATION, MINUTE -----		THE MINUTE OF THE HOUR REPORTED AS THE OFFICIAL TIME OF OBSERVATION OF THE WEATHER INFORMATION.
		0 THROUGH 59	0 THROUGH 59	IN ONE MINUTE INCREMENTS.
		ILLEGAL	60 THROUGH 62	
		NO STATEMENT	63	
789	001	QNH ---		ALTIMETER SET TO READ ZERO AT MEAN SEA LEVEL.
		NO STATEMENT	0	
		950 THROUGH 1050 HECTOPASCALS	1 THROUGH 101	IN 1 HECTOPASCAL INCREMENTS.
		ILLEGAL	102 THROUGH 127	
1545	001	LANDING APPROACH CONDITION -----		DESCRIBES THE METEOROLOGICAL CONDITION OF THE APPROACH AND RECOVERY ROUTE TO THE AIRCRAFT CARRIER.
		NO STATEMENT	0	
		CV RECOVERY CASE I	1	THE APPROACH AND RECOVERY ROUTE TO THE CV ARE UNDER VISUAL METEOROLOGICAL CONDITIONS.
		CV RECOVERY CASE II	2	THE APPROACH AND RECOVERY ROUTE TO THE CV ARE VARYING BETWEEN

FIELD CODING FOR J13.0I (SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1545	001	LANDING APPROACH CONDITION -----	(CONTINUED)	
		CV RECOVERY CASE III	3	INSTRUMENT AND VISUAL METEOROLOGICAL CONDITIONS. THE APPROACH AND RECOVERY ROUTE TO THE CV ARE UNDER INSTRUMENT METEOROLOGICAL CONDITIONS.
		UNDEFINED	4 THROUGH 7	
1888	001	SECONDARY RUNWAY INDICATOR -----		USED TO INDICATE WHETHER THE ACTIVE RUNWAY IS A SECONDARY RUNWAY.
		NO STATEMENT	0	
		SECONDARY RUNWAY	1	THE ACTIVE RUNWAY REPORTED IN THE J13.0EO WORD IS A SECONDARY RUNWAY.

WORD MAP

WORD NUMBER: J13.0E0

WORD TITLE: AIRFIELD STATUS EXTENSION WORD

24	23	22:	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02:	01	00:		
			:																			:	WORD	:		
<---			:	ICAO CODE																		:	FORMAT	:		
			:																			:		:		
			:	20																		:	2	:		
49:	48	47	46:	45	44	43:	42:	41	40	39:	38:	37:	36	35	34:	33	32	31	30	29	28:	27	26	25		
<---		:	AR BRKNG		:	AR WIRES		:	AR	:	AR LIGHT		:	AR	:	AR	:	ACTIVE RUNWAY STATUS		:	ACTIVE RUNWAY AVAILABLE LENGTH			:	ACTIVE RUNWAY DIRECTION	
		:			:			:	AB	:			:	ILS	:	GCA	:			:				:		
		:			:			:		:			:		:		:			:				:		
		:	3		:	3		:	1	:	3		:	1	:	1	:	3		:	6			:	6	
					:	69	68	67	66	65	64	63	62	61:	60:	59	58	57	56	55	54	53:	52	51	50	
					:	DESIGNATED FLYING COURSE										:	FD	:	QFE					:	ACTIVE RUNWAY VISUAL RANGE	
					:											:	GPI	:						:		
					:											:		:						:		
					:	9										:	1	:	7					:	4	

WORD DESCRIPTION

WORD NUMBER: J13.0E0

WORD TITLE: AIRFIELD STATUS EXTENSION WORD

REFERENCE	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0- 1	2	10
1868 001	ICAO CODE	2- 21	20	
845 002	ACTIVE RUNWAY DIRECTION	22- 27	6	
1875 001	ACTIVE RUNWAY AVAILABLE LENGTH	28- 33	6	
1874 001	ACTIVE RUNWAY STATUS	34- 36	3	
1873 003	ACTIVE RUNWAY GCA/FLIGHT DECK PAR (AR GCA)	37	1	
1873 007	ACTIVE RUNWAY ILS/FLIGHT DECK PRECISION APPROACH AID (MADGE) (AR ILS)	38	1	SAME CODING AS FOR BIT 37.
1873 005	ACTIVE RUNWAY APPROACH LIGHTING (AR LIGHT)	39- 41	3	
1873 009	ACTIVE RUNWAY ARRESTER BARRIER (AR AB)	42	1	SAME CODING AS FOR BIT 37.
1873 011	ACTIVE RUNWAY ARRESTER WIRES (AR WIRES)	43- 45	3	
1886 001	ACTIVE RUNWAY BRAKING ACTION (AR BRKNG)	46- 48	3	
286 001	ACTIVE RUNWAY VISUAL RANGE (AR VISUAL RANGE)	49- 52	4	
789 002	QFE	53- 59	7	
1873 013	FLIGHT DECK GLIDE PATH INDICATOR (FD GPI)	60	1	SAME CODING AS FOR BIT 37.
371 016	DESIGNATED FLYING COURSE	61- 69	9	

FIELD CODING FOR J13.0E0 (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1868	001	ICAO CODE ----- AAAA THROUGH ZZZZ	0 THROUGH 1048575	THIS FIELD IS DIVIDED INTO FOUR FIVE BIT GROUPS WITH CODING FOR EACH OF THE FIVE BIT GROUPS AS FOLLOWS: 00000 = NO STATEMENT 00001 = A 00010 = B 00011 = C 00100 = D 00101 = E 00110 = F 00111 = G 01000 = H 01001 = I 01010 = J 01011 = K 01100 = L 01101 = M 01110 = N 01111 = O 10000 = P 10001 = Q 10010 = R 10011 = S 10100 = T 10101 = U 10110 = V 10111 = W 11000 = X 11001 = Y 11010 = Z 11011 THROUGH 11111 = ILLEGAL
845	002	ACTIVE RUNWAY DIRECTION ----- 0 DEGREES THROUGH 350 DEGREES NO STATEMENT ILLEGAL	0 THROUGH 35 36 37 THROUGH 63	THE GENERAL DIRECTION OF THE ACTIVE RUNWAY. IN 10 DEGREE INCREMENTS.
1875	001	ACTIVE RUNWAY AVAILABLE LENGTH ----- 0 THROUGH 6200 METERS	0 THROUGH 62	IN 100 METER INCREMENTS.

FIELD CODING FOR J13.0E0

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

1875	001	ACTIVE RUNWAY AVAILABLE LENGTH (CONTINUED)		
------	-----	--	--	--

		NO STATEMENT	63	

1874	001	ACTIVE RUNWAY STATUS		
------	-----	----------------------	--	--

		NO STATEMENT	0	
		BLACK DUE TO UNSPECIFIED	1	
		MAJOR DAMAGE		
		CLEAR	2	
		BLACK DUE TO STRONG	3	
		CROSSWINDS		
		BLACK DUE TO SNOW/ICE	4	
		BLACK DUE TO CRASHED	5	
		AIRCRAFT		
		UNDEFINED	6 THROUGH 7	

1873	003	ACTIVE RUNWAY GCA/FLIGHT DECK PAR		
------	-----	--------------------------------------	--	--

		NOT AVAILABLE	0	
		AVAILABLE	1	

1873	005	ACTIVE RUNWAY APPROACH LIGHTING		
------	-----	------------------------------------	--	--

		NO STATEMENT	0	
		NONE	1	
		LIMITED/EMERGENCY	2	
		3-BAR	3	
		FULL NATO	4	
		UNDEFINED	5 THROUGH 7	

1873	011	ACTIVE RUNWAY ARRESTER WIRES		
------	-----	------------------------------	--	--

		NO STATEMENT	0	
		NOT AVAILABLE	1	
		TOUCHDOWN WIRE RIGGED	2	
		OVERRUN WIRE RIGGED	3	
		BOTH WIRES RIGGED	4	
		UNDEFINED	5 THROUGH 7	

1886	001	ACTIVE RUNWAY BRAKING ACTION		
------	-----	------------------------------	--	--

				EXPRESSES ESTIMATED SURFACE FRICTION IN ACCORDANCE WITH THE ICAO SYSTEM AND STANAG 3634, FOR THE ACTIVE

FIELD CODING FOR J13.0E0

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1886	001	ACTIVE RUNWAY BRAKING ACTION -----	(CONTINUED)	
		NO STATEMENT	0	RUNWAY.
		POOR	1	
		MEDIUM/POOR	2	
		MEDIUM	3	
		MEDIUM/GOOD	4	
		GOOD	5	
		UNDEFINED	6 THROUGH 7	
286	001	ACTIVE RUNWAY VISUAL RANGE -----		EXPRESSES PRIMARY RUNWAY VISUAL RANGE IN METERS.
		0 THROUGH 1400 METERS	0 THROUGH 14	IN 100 METER INCREMENTS.
		NO STATEMENT	15	
789	002	QFE ---		UK NATIONAL USE ONLY. ALTIMETER SET TO READ ZERO AT AIRFIELD RUNWAY (GROUND LEVEL).
		NO STATEMENT	0	
		950 THROUGH 1050 HECTOPASCALS	1 THROUGH 101	IN 1 HECTOPASCAL INCREMENTS.
		ILLEGAL	102 THROUGH 127	
371	016	DESIGNATED FLYING COURSE -----		OPTIMUM FLYING COURSE FOR LAUNCH/ RECOVERY OF AIRCRAFT.
		0 THROUGH 359 DEGREES	0 THROUGH 359	IN 1 DEGREE INCREMENTS.
		ILLEGAL	360 THROUGH 510	
		NO STATEMENT	511	

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J13.0C1

WORD TITLE: AIRFIELD STATUS CONTINUATION WORD

:	24	23	22	21:	20	19	18	17	16	15	14:	13	12	11	10	09	08	07:	06	05	04	03	02:	01	00:
:	WIND GUST				:					:					:	CONTINUATION WORD				:	WORD				:
:	INCREMENT				:	WIND SPEED				:	WIND DIRECTION				:	LABEL				:	FORMAT				:
:					:					:					:					:					:
:	4				:	7				:	7				:	5				:	2				:

	49:	48	47	46	45	44	43:	42	41:	40	39	38	37	36	35:	34	33:	32	31	30	29	28	27:	26	25:
<---	:	CLOUD HEIGHT, 3				:	:	CLOUD	:	CLOUD HEIGHT, 2				:	CC2	:	CLOUD HEIGHT, 1				:	CC1	:		
	:					:	:	COVER,	:					:		:					:		:		
	:					:	:	3	:					:		:					:		:		
	:	6				:	:	2	:	6				:	2	:	6				:	2	:		

:	69	68:	67:	66	65	64:	63	62	61:	60	59	58	57	56:	55	54	53	52	51	50
:			:	:BASE ACTUAL:		:			:			:			:			:		
:	SP		:	WSI:	WEATHER	:	WXDES		:	:BASE ACTUAL WEATHER:		:			:	VISIBILITY		:		
:			:	:INTENSITY/		:			:			:			:			:		
:			:	: PROXIMITY		:			:			:			:			:		
:	2		:	1		:	3		:	3		:	5		:	7		:		

WORD DESCRIPTION

WORD NUMBER: J13.0C1

WORD TITLE: AIRFIELD STATUS CONTINUATION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550 001		WORD FORMAT	0-	1 2	01
1551 001		CONTINUATION WORD LABEL	2-	6 5	00001
371 003		WIND DIRECTION	7-	13 7	
367 012		WIND SPEED	14-	20 7	
367 013		WIND GUST INCREMENT	21-	24 4	
775 003		CLOUD COVER, 1 (CC1)	25-	26 2	
365 025		CLOUD HEIGHT, 1	27-	32 6	
775 004		CLOUD COVER, 2 (CC2)	33-	34 2	SAME CODING AS FOR BITS 25-26.
365 026		CLOUD HEIGHT, 2	35-	40 6	SAME CODING AS FOR BITS 27-32.
775 005		CLOUD COVER, 3 (CC3)	41-	42 2	SAME CODING AS FOR BITS 25-26.
365 027		CLOUD HEIGHT, 3	43-	48 6	SAME CODING AS FOR BITS 27-32.
757 013		VISIBILITY	49-	55 7	
287 001		BASE ACTUAL WEATHER	56-	60 5	
287 002		BASE ACTUAL WEATHER DESCRIPTOR (WXDES)	61-	63 3	
287 003		BASE ACTUAL WEATHER INTENSITY/ PROXIMITY (WXIP)	64-	66 3	
1887 001		WIND SHEAR INDICATOR (WSI)	67	1	
756 002		SPARE (SP)	68-	69 2	

FIELD CODING FOR J13.0C1

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
371	003	WIND DIRECTION ----- NO STATEMENT 005 THROUGH 360 DEGREES VARIABLE ILLEGAL	0 1 THROUGH 72 73 74 THROUGH 127	THE DIRECTION FROM WHICH THE WIND IS BLOWING IN RELATION TO TRUE NORTH. IN 5 DEGREE INCREMENTS.
367	012	WIND SPEED ----- 0 THROUGH 125 KNOTS OVER 125 KNOTS NO STATEMENT	0 THROUGH 125 126 127	EXPRESSES THE SPEED OF THE WIND IN KNOTS. IN 1 KNOT INCREMENTS.
367	013	WIND GUST INCREMENT ----- 0 THROUGH 65 KNOTS GREATER THAN 65 KNOTS NO STATEMENT	0 THROUGH 13 14 15	THE VALUE REPORTED IS ADDED TO THE VALUE OF THE WIND SPEED, REPORTED IN DFI/DUI 367 012, TO GIVE THE MAXIMUM MOMENTARY WIND SPEED. IN 5 KNOT INCREMENTS.
775	003	CLOUD COVER, 1 ----- SKY CLEAR SCATTERED BROKEN OVERCAST	0 1 2 3	FIELD NOT INTERPRETED IF THE CORRESPONDING CLOUD HEIGHT IS SET TO A VALUE OTHER THAN 1 THROUGH 61. SKY CLEAR IS DEFINED AS LESS THAN 1 OKTA (OR LESS THAN 0.1 SKY COVER). 1-4 OKTAS (0.1 THROUGH 0.5 SKY COVER). 5-7 OKTAS (0.6 THROUGH 0.9 SKY COVER). 8 OKTAS (MORE THAN 0.9 SKY COVER).
365	025	CLOUD HEIGHT, 1 ----- NO STATEMENT 100 THROUGH 6000 FEET OVER 6000 FEET UNDEFINED SKY OBSCURED	0 1 THROUGH 60 61 62 63	HEIGHT OF CLOUD BASE IN 100 FEET INCREMENTS.

FIELD CODING FOR J13.0C1

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
757	013	VISIBILITY -----		IN 100 METER INCREMENTS.
		0 THROUGH 12,500 METERS	0 THROUGH 125	IN 100 METER INCREMENTS.
		OVER 12,500 METERS	126	
		NO STATEMENT	127	
287	001	BASE ACTUAL WEATHER -----		DESCRIBES THE ACTUAL WEATHER AT A BASE.
		NO STATEMENT	0	
		NO SIGNIFICANT WEATHER	1	
		DRIZZLE	2	
		RAIN	3	
		SNOW	4	
		SNOW GRAINS	5	
		DIAMOND DUST	6	
		ICE PELLETS	7	
		HAIL	8	
		SMALL HAIL/SNOW PELLETS	9	
		MIST	10	
		FOG	11	
		SMOKE	12	
		VOLCANIC ASH	13	
		WIDESPREAD DUST	14	
		SAND	15	
		HAZE	16	
		WELL-DEVELOPED DUST/SAND	17	
		WHIRLS		
		SQUALLS	18	
		FUNNEL CLOUDS	19	
		SANDSTORM	20	
		DUSTSTORM	21	
		UNDEFINED	22 THROUGH 31	
287	002	BASE ACTUAL WEATHER DESCRIPTOR -----		USED IN CONJUNCTION WITH BASE ACTUAL WEATHER AND BASE ACTUAL WEATHER INTENSITY/PROXIMITY.
		NO STATEMENT	0	
		SHALLOW	1	
		PATCHES	2	
		LOW DRIFTING	3	
		BLOWING	4	
		SHOWERS	5	
		THUNDERSTORMS	6	
		SUPERCOOLED	7	

FIELD CODING FOR J13.0C1

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
287	003	BASE ACTUAL WEATHER INTENSITY/ PROXIMITY -----		USED IN CONJUNCTION WITH BASE ACTUAL WEATHER AND BASE ACTUAL WEATHER DESCRIPTOR.
		NO STATEMENT	0	
		LIGHT	1	
		MODERATE	2	
		HEAVY	3	
		IN THE VICINITY	4	
		UNDEFINED	5 THROUGH 7	
1887	001	WIND SHEAR INDICATOR -----		USED TO REPORT THE PRESENCE OF WIND SHEAR ON THE APPROACH TO THE ACTIVE RUNWAY OR FLIGHT DECK.
		NO STATEMENT	0	
		WIND SHEAR REPORTED	1	

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J13.0C2

WORD TITLE: AIRFIELD LOGISTICS CONTINUATION WORD

```

-----
: 24: 23: 22: 21: 20: 19: 18: 17: 16: 15: 14: 13: 12: 11: 10: 09: 08: 07: 06 05 04 03 02: 01 00:
-----
:AAM:AAM:AAM:AAM:MIC:530: :MGC:MGC:ASR:AMR:SKY:AIM:AIM:AIM: : :AV : CONTINUATION WORD : WORD :
:TBD:TBD:TBD:TBD:AAM: D :530:II : I :AAM:AAM:FLS:9P :9M :9L :NIT:LOX:TUR: LABEL :FORMAT :
: : : : : : : : : : : : : : : : : : : : : :
-----
: 1 : 1 : 1 : 1 : 1 : 1 : 1 : 1 : 1 : 1 : 1 : 1 : 1 : 1 : 1 : 1 : 1 : 1 : 1 : 5 : 2 :
-----

```

```

-----
49 48 47 46 45 44 43 42 41 40 39 38: 37: 36: 35: 34: 33: 32: 31: 30: 29: 28: 27: 26: 25:
-----
:30 :27 :20 :100:500: :DEP:ASM:ASM:ASM:ASM:BAP:DUR:
<--- :MM :MM :MM :BMB:BMB:NDB:CH :TBD:TBD:TBD:TBD:100:ASM:
: : : : : : : : : : : : : : : :
-----
: 1 : 1 : 1 : 1 : 1 : 1 : 1 : 1 : 1 : 1 : 1 : 1 : 1 : 1 :
-----

```

```

-----
: 69 68 67 66 65 64 63 62 61 60 59 58 57 56 55 54 53 52 51 50
-----
:
:
:
-----
:
32
-----

```

WORD DESCRIPTION

WORD NUMBER: J13.0C2

WORD TITLE: AIRFIELD LOGISTICS CONTINUATION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	01
1551	001	CONTINUATION WORD LABEL	2-	6 5	00010
1870	005	AVTUR (AV TUR)	7	1	
1870	004	LIQUID OXYGEN (LOX)	8	1	SAME CODING AS FOR BIT 7.
1870	003	NITROGEN (NIT)	9	1	SAME CODING AS FOR BIT 7.
1872	002	AIM-9L AIR-TO-AIR MISSILE (AIM 9L)	10	1	SAME CODING AS FOR BIT 7.
1872	027	AIM-9M AIR-TO-AIR MISSILE (AIM 9M)	11	1	SAME CODING AS FOR BIT 7.
1872	028	AIM-9P AIR-TO-AIR MISSILE (AIM 9P)	12	1	SAME CODING AS FOR BIT 7.
1872	006	SKY FLASH AIR-TO-AIR MISSILE (SKY FLS)	13	1	SAME CODING AS FOR BIT 7.
1872	007	AMRAAM AIR-TO-AIR MISSILE (AMR AAM)	14	1	SAME CODING AS FOR BIT 7.
1872	008	ASRAAM AIR-TO-AIR MISSILE (ASR AAM)	15	1	SAME CODING AS FOR BIT 7.
1872	022	MAGIC I AIR-TO-AIR MISSILE (MGC I)	16	1	SAME CODING AS FOR BIT 7.
1872	023	MAGIC II AIR-TO-AIR MISSILE (MGC II)	17	1	SAME CODING AS FOR BIT 7.
1872	024	SUPER 530 AIR-TO-AIR MISSILE (530)	18	1	SAME CODING AS FOR BIT 7.
1872	025	SUPER 530D AIR-TO-AIR MISSILE (530 D)	19	1	SAME CODING AS FOR BIT 7.
1872	026	MICA AIR-TO-AIR MISSILE (MIC AAM)	20	1	SAME CODING AS FOR BIT 7.
1872	029	TBD AIR-TO-AIR MISSILE (AAM TBD)	21	1	SAME CODING AS FOR BIT 7.
1872	030	TBD AIR-TO-AIR MISSILE (AAM TBD)	22	1	SAME CODING AS FOR BIT 7.
1872	031	TBD AIR-TO-AIR MISSILE (AAM TBD)	23	1	SAME CODING AS FOR BIT 7.
1872	032	TBD AIR-TO-AIR MISSILE (AAM TBD)	24	1	SAME CODING AS FOR BIT 7.
1872	009	DURANDAL AIR-TO-SURFACE MISSILE (DUR ASM)	25	1	SAME CODING AS FOR BIT 7.

WORD DESCRIPTION

WORD NUMBER: J13.0C2

WORD TITLE: AIRFIELD LOGISTICS CONTINUATION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1872 010	BAP 100	AIR-TO-SURFACE MISSILE (BAP 100)	26	1	SAME CODING AS FOR BIT 7.
1872 011	TBD	AIR-TO-SURFACE MISSILE (ASM TBD)	27	1	SAME CODING AS FOR BIT 7.
1872 012	TBD	AIR-TO-SURFACE MISSILE (ASM TBD)	28	1	SAME CODING AS FOR BIT 7.
1872 013	TBD	AIR-TO-SURFACE MISSILE (ASM TBD)	29	1	SAME CODING AS FOR BIT 7.
1872 014	TBD	AIR-TO-SURFACE MISSILE (ASM TBD)	30	1	SAME CODING AS FOR BIT 7.
1872 015	ANTI-SUBMARINE	DEPTH CHARGE (DEP CH)	31	1	SAME CODING AS FOR BIT 7.
1872 016	NDB	(NDB)	32	1	SAME CODING AS FOR BIT 7.
1872 017	CONVENTIONAL	500 POUND BOMB (500 BMB)	33	1	SAME CODING AS FOR BIT 7.
1872 018	CONVENTIONAL	1000 POUND BOMB (100 BMB)	34	1	SAME CODING AS FOR BIT 7.
1872 019	20	MILLIMETER AMMUNITION (20 MM)	35	1	SAME CODING AS FOR BIT 7.
1872 020	27	MILLIMETER AMMUNITION (27 MM)	36	1	SAME CODING AS FOR BIT 7.
1872 021	30	MILLIMETER AMMUNITION (30 MM)	37	1	SAME CODING AS FOR BIT 7.
756 032	SPARE		38- 69	32	

FIELD CODING FOR J13.0C2 (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1870	005	AVTUR		

		NOT AVAILABLE	0	
		AVAILABLE	1	

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

J13.2 MESSAGE SUMMARY

PURPOSE

The J13.2 Air Platform and System Status Message provides the current status of an air platform to include ordnance load, fuel, operational status, and on board systems' status.

DATA ELEMENT SUMMARY

<u>J13.2I</u>		<u>J13.2C1 (Continued)</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	AIR SPECIFIC TYPE	12
LABEL, J-SERIES	5		
SUBLABEL, J-SERIES	3	<u>J13.2C2</u>	
MESSAGE LENGTH INDICATOR	3	DATA ELEMENT	# BITS
OPERATIONAL CAPABILITY, AIRCRAFT	2	WORD FORMAT	2
SPARE	2	CONTINUATION WORD LABEL	5
TRACK NUMBER, REFERENCE	19	SUMMATION INDICATOR	1
FUEL FUNCTION	1	NUMBER OF STORES, 1	6
FUEL	12	TYPE OF STORES, 1	8
RADAR CHANNEL INDICATOR	1	NUMBER OF STORES, 2	6
RADAR CHANNEL	6	TYPE OF STORES, 2	8
TIME REPORT FUNCTION	3	NUMBER OF STORES, 3	6
MINUTE	6	TYPE OF STORES, 3	8
HOURL	5	NUMBER OF STORES, 4	6
		TYPE OF STORES, 4	8
		GUN CAPABLE	1
<u>J13.2C1</u>		IFF/SIF TRANSPONDER STATUS	2
DATA ELEMENT	# BITS	IFF/SIF INTERROGATOR STATUS	2
WORD FORMAT	2	SPARE	1
CONTINUATION WORD LABEL	5		
RADAR STATUS	2	<u>J13.2C3</u>	
INFRARED STATUS	2	DATA ELEMENT	# BITS
MISSILE CHANNEL	6	WORD FORMAT	2
LASER STATUS	2	CONTINUATION WORD LABEL	5
TELEVISION STATUS	2	CONVENTIONAL DEPTH BOMB INVENTORY	2
RADAR WARNING AND RECEIVING STATUS	2	SPECIAL DEPTH BOMB INVENTORY	2
AIR-TO-AIR WEAPON RELEASE SYSTEM STATUS	2	CONVENTIONAL TORPEDO INVENTORY	2
AIR-TO-GROUND WEAPON RELEASE SYSTEM STATUS	2	SPECIAL TORPEDO INVENTORY	2
RADIO TYPE, 1	3	CONVENTIONAL MISSILE INVENTORY	2
RADIO STATUS, 1	3	SPECIAL MISSILE INVENTORY	2
SECURE RADIO INDICATOR, 1	2	ROCKET INVENTORY	2
RADIO TYPE, 2	3	ACTIVE SONOBUOY INVENTORY	2
RADIO STATUS, 2	3	PASSIVE SONOBUOY INVENTORY	2
SECURE RADIO INDICATOR, 2	2	SPARE	1
RADIO TYPE, 3	3	RADAR STATUS INDICATOR	1
RADIO STATUS, 3	3	ELECTRONIC WARFARE SUPPORT, STATUS	1
SECURE RADIO INDICATOR, 3	2	INFRARED STATUS INDICATOR	1
AUTOPILOT STATUS	1	LOW FREQUENCY ANALYSIS AND RECORDING STATUS	1
SENSOR TARGET REPORTING STATUS	1	MAGNETIC ANOMALY DETECTOR STATUS	1
AIRCRAFT MODEL	5		

MIL-STD-6016B

J13.2 MESSAGE SUMMARY (Continued)

DATA ELEMENT SUMMARY (Continued)

J13.2C3 (Continued)

DATA ELEMENT	# BITS
SEARCH LIGHT STATUS	1
LOW LIGHT LEVEL TELEVISION STATUS	1
DIFAR/CODAR STATUS	1
ACTIVE SONOBUOY STATUS	1
RECORDER STATUS, 1	1
RECORDER STATUS, 2	1
RECORDER STATUS, 3	1
RECORDER STATUS, 4	1
SONAR STATUS	1
SPECIAL SONOBUOY STATUS, 1	1
SPECIAL SONOBUOY STATUS, 2	1
SPECIAL PROCESSOR STATUS, 1	1
SPECIAL PROCESSOR STATUS, 2	1
RADAR WATCH ALTITUDE	9
SPARE	17

J13.2C4

DATA ELEMENT	# BITS
WORD FORMAT	2
CONTINUATION WORD LABEL	5
ES FREQUENCY BAND A	2
ES FREQUENCY BAND B	2
ES FREQUENCY BAND C	2
ES FREQUENCY BAND D	2
ES FREQUENCY BAND E	2
ES FREQUENCY BAND F	2
ES FREQUENCY BAND G	2
ES FREQUENCY BAND H	2
ES FREQUENCY BAND I	2
ES FREQUENCY BAND J	2
ES FREQUENCY BAND K	2
ES FREQUENCY BAND L	2
HF DIRECTION FINDER	2
VHF DIRECTION FINDER	2
UHF DIRECTION FINDER	2
EA FREQUENCY BAND A	2
EA FREQUENCY BAND B	2
EA FREQUENCY BAND C	2
EA FREQUENCY BAND D	2
EA FREQUENCY BAND E	2
EA FREQUENCY BAND F	2
EA FREQUENCY BAND G	2
EA FREQUENCY BAND H	2
EA FREQUENCY BAND I	2
EA FREQUENCY BAND J	2
EA FREQUENCY BAND K	2
EA FREQUENCY BAND L	2

J13.2C4 (Continued)

DATA ELEMENT	# BITS
EA FREQUENCY BAND M	2
DECOY, CHAFF	2
DECOY, IR	2
SPARE	1

J13.2C5

DATA ELEMENT	# BITS
WORD FORMAT	2
CONTINUATION WORD LABEL	5
LINK 14 STATUS	2
LINK 11 STATUS	3
LINK 16 STATUS	3
IJMS STATUS	2
LINK 4 STATUS	2
COMMUNICATIONS IMPAIRMENT	3
CONTROL POSITIONS, 1	4
MODE IV INTERROGATOR STATUS	1
COMPUTER STATUS	3
CONSOLE STATUS	5
SPARE	35

J13.2C6

DATA ELEMENT	# BITS
WORD FORMAT	2
CONTINUATION WORD LABEL	5
LINK 16 CONTROL STATUS	2
LINK 4A CONTROL STATUS	2
LINK 4C STATUS	2
VOICE GROUP A CHANNEL	7
VOICE GROUP B CHANNEL	7
VMF STATUS	2
DECOY EA STATUS	2
MISSILE WARNING SYSTEM STATUS	2
TELEMETRY POD SUBSYSTEM STATUS	2
LASER SPOT TRACKER SUBSYSTEM STATUS	2
GLOBAL POSITIONING SUBSYSTEM STATUS	2
RECCE SYSTEM TYPE	3
RECCE SYSTEM STATUS	2
DEFENSIVE JAMMER SYSTEM 1 TYPE	3
DEFENSIVE JAMMER SYSTEM 1 STATUS	3
DEFENSIVE JAMMER SYSTEM 2 TYPE	3
DEFENSIVE JAMMER SYSTEM 2 STATUS	3
SPARE	14

MIL-STD-6016B

J13.2 MESSAGE SUMMARY (Continued)

DATA ELEMENT SUMMARY (Continued)

<u>J13.2C7</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
CONTINUATION WORD LABEL	5
SUMMATION INDICATOR	1
NUMBER OF STORES, 5	6
TYPE OF STORES, 5	8
NUMBER OF STORES, 6	6
TYPE OF STORES, 6	8
NUMBER OF STORES, 7	6
TYPE OF STORES, 7	8
NUMBER OF STORES, 8	6
TYPE OF STORES, 8	8
SPARE	6

MIL-STD-6016B

J13.2 TRANSMIT/RECEIVE RULES

TITLE: Air Platform and System Status Message

TRANSMIT RULES

1. The J13.2 Air Platform and System Status message shall be transmitted by JU platforms, by the controlling units of nonJU platforms, or by the C² JUs exercising control over JU platforms.
2. JU platforms shall transmit this message periodically at an RRN between 2 (3.2 minutes, 2.4-4 minute interval) and 4 (48 seconds, 36-60 second interval) or when any data except the fuel field change.
3. Controlling units of nonJU platforms and C² JUs exercising control over JU platforms not reporting their own status shall transmit this message periodically at an RRN = 0 (12.8 minutes, 9.6-12.8 minute interval).
4. The controlling units of nonJU platforms and C² JUs exercising control over airborne JU platforms shall transmit this message once in response to a J7.1 (ACT = 1) Data Update Request message.
5. Only the J13.2CX continuation words appropriate to the platforms' equipment and stores load need be transmitted. If there are more continuation words containing data than can be transmitted in a single time slot the message shall be transmitted as follows:
 - a. When there is a limit of 3 words per time slot, the J13.2I word followed by two J13.2CX words will be sent. This sequence will be repeated until all continuation words containing data have been sent.
 - b. When there is a limit of 6 words per time slot, the J13.2I word followed by five J13.2CX words will be sent. This sequence will be repeated until all continuation words containing data have been sent.
6. A platform reporting its own status shall set the Reference TN field to the same track number as TN, Source in the header word.

MIL-STD-6016B

J13.2 TRANSMIT/RECEIVE RULES (Continued)

TRANSMIT RULES (Continued)

7. When reporting both burnable and off-load fuel, two initial words must be sent.

RECEIVE RULES

C² JUs assuming control of a platform whose status is being reported in a J13.2 message shall retain these data for retransmission.

.....

WORD TITLE: AIR PLATFORM AND SYSTEM STATUS INITIAL WORD

24	23	22	21	20	19	18	17:	16	15:	14	13:	12	11	10:	09	08	07:	06	05	04	03	02:	01	00:			
								:					MESSAGE			SUBLABEL,							WORD		:		
<---								:	SP	:	AR	CAP	:	LENGTH			J-SERIES			LABEL, J-SERIES				:	FORMAT	:	
								:					INDICATOR										:		:		
								:	2	:	2	:	3			:	3			:	5				:	2	:

: 49:	48	47	46	45	44	43	42	41	40	39	38	37:	36:	35	34	33	32	31	30	29	28	27	26	25
:RDC:													:FL :											
:IND:						FUEL							:FCT:				TRACK NUMBER,	REFERENCE						
:	:												:	:										
: 1 :						12							: 1 :					19						

:	69	68	67	66	65:	64	63	62	61	60	59:	58	57	56:	55	54	53	52	51	50:				
:						:						:	TIME REPORT:					:						
:	HOUR					:	MINUTE					:	FUNCTION					:	RADAR CHANNEL					:
:						:						:						:						:
:	5					:	6					:	3					:	6					:

WORD DESCRIPTION

WORD NUMBER: J13.2I

WORD TITLE: AIR PLATFORM AND SYSTEM STATUS INITIAL WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	00
270 004	LABEL, J-SERIES	2-	6 5	01101
271 005	SUBLABEL, J-SERIES	7-	9 3	010
800 001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
753 003	OPERATIONAL CAPABILITY, AIRCRAFT (AR CAP)	13-	14 2	
756 002	SPARE (SP)	15-	16 2	
769 002	TRACK NUMBER, REFERENCE	17-	35 19	
806 001	FUEL FUNCTION (FL FCT)	36	1	
409 003	FUEL	37-	48 12	
828 001	RADAR CHANNEL INDICATOR (RDC IND)	49	1	
852 001	RADAR CHANNEL	50-	55 6	
1681 002	TIME REPORT FUNCTION	56-	58 3	
797 004	MINUTE	59-	64 6	
792 001	HOURL	65-	69 5	

FIELD CODING FOR J13.2I

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
753	003	OPERATIONAL CAPABILITY, AIRCRAFT -----		DESCRIBES THE OPERATIONAL CAPABILITY OF THE REPORTED AIRCRAFT.
		NO STATEMENT	0	
		ABLE TO PERFORM MISSION	1	
		LOW FUEL STATE	2	
		UNABLE TO PERFORM MISSION	3	

769	002	TRACK NUMBER, REFERENCE -----		A REFERENCE NUMBER USED TO ASSOCIATE INFORMATION AND DIRECTIVES WITH THE TRACK. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE- BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANNN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.
-----	-----	----------------------------------	--	---

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6

FIELD CODING FOR J13.2I (SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
				00111 7
				01000 A
				01001 B
				01010 C
				01011 D
				01100 E
				01101 F
				01110 G
				01111 H
				10000 J
				10001 K
				10010 L
				10011 M
				10100 N
				10101 P
				10110 Q
				10111 R
				11000 S
				11001 T
				11010 U
				11011 V
				11100 W
				11101 X
				11110 Y
				11111 Z
		00000	0	NO STATEMENT.
		00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		00077	63	ILLEGAL.
		00100-00175	64 THROUGH 125	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		00176	126	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		00177	127	COLLECTIVE ADDRESS.
		00200-07776	128 THROUGH 4094	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		07777	4095	ILLEGAL.
		0A000-0Z777	4096 THROUGH 16383	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND

FIELD CODING FOR J13.2I

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		10000-17777	16384 THROUGH 20479	REFERENCE POINTS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		20000-27777	32768 THROUGH 36863	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE

FIELD CODING FOR J13.2I

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		60000-67777	98304 THROUGH 102399	USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		70000-77776	114688 THROUGH 118782	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		7A000-ZZ777	118784 THROUGH 524287	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
806	001	FUEL FUNCTION -----		ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		BURNABLE FUEL	0	USED IN CONJUNCTION WITH THE FUEL FIELD TO INDICATE EITHER BURNABLE OR OFF-LOAD FUEL.
		OFF-LOAD FUEL	1	
409	003	FUEL ----		INDICATES THAT THE FUEL SPECIFIED IN THE FUEL FIELD IS AVAILABLE FOR TRANSFER.
		0 THROUGH 409,400 POUNDS OF FUEL	0 THROUGH 4094	
		NO STATEMENT	4095	THE CURRENT FUEL IN POUNDS REMAINING IN THE CONTROLLED PLATFORM. FUEL IN 100 POUND INCREMENTS.
828	001	RADAR CHANNEL INDICATOR -----		INDICATES WHETHER THE RADAR IS OPERATING ON A SINGLE RF CHANNEL OR FREQUENCY AGILITY RF CHANNEL GROUP.

5.3-43

MIL-STD-6016B

FIELD CODING FOR J13.2I

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
828	001	RADAR CHANNEL INDICATOR -----	(CONTINUED)	
		SINGLE RF CHANNEL OPERATION	0	
		AUTOMATIC FREQUENCY AGILITY OPERATION	1	
852	001	RADAR CHANNEL -----		IDENTIFIES THE RADAR RF CHANNEL OR AUTOMATIC FREQUENCY AGILITY CHANNEL GROUP SELECTED. THE FREQUENCY(IES) ASSOCIATED WITH EACH RADAR CHANNEL OR FREQUENCY AGILITY CHANNEL GROUP IS/ARE UNIQUE TO EACH AIR SPECIFIC TYPE.
		NO STATEMENT SELECTED CHANNEL 1 THROUGH 63	0 1 THROUGH 63	
1681	002	TIME REPORT FUNCTION -----		USED IN CONJUNCTION WITH THE MINUTE AND HOUR FIELDS TO DESCRIBE THEIR USE.
		NO STATEMENT TIME OF REPORT	0 1	
		DISUSED ARRIVE ON STATION	2 3	THE TIME OF DAY IN HOURS AND MINUTES THAT THE REPORT WAS RELEASED FOR TRANSMISSION.
		TIME REMAINING ON STATION	4	DELTA TIME IN HOURS AND MINUTES FROM THE TIME THE REPORT WAS RELEASED FOR TRANSMISSION BEFORE A UNIT ARRIVES ON STATION.
		DEPART STATION	5	DELTA TIME IN HOURS AND MINUTES FROM THE TIME THE REPORT WAS RELEASED FOR TRANSMISSION INDICATING THE ESTIMATED TIME THAT AN AIRCRAFT CAN REMAIN ON TASK, TAKING INTO ACCOUNT SUCH OPERATIONAL FACTORS AS FUEL STATE, WEATHER, DISTANCE FROM BASE, ETC. ILLEGAL FOR USE IN THE J13.3.
		TIME ON TARGET	6	THE TIME OF DAY IN HOURS AND MINUTES THAT A UNIT IS SCHEDULED TO LEAVE ITS STATION IN ACCORDANCE WITH ITS MISSION PLAN, OR THE TIME OF DAY THAT THE UNIT LEFT ITS STATION.
				DELTA TIME IN HOURS AND MINUTES FROM

FIELD CODING FOR J13.2I (SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1681	002	TIME REPORT FUNCTION -----	(CONTINUED)	
		UNDEFINED	7	TIME OF CURRENT REPORT.
797	004	MINUTE -----		THE MINUTE OF THE HOUR.
		0 THROUGH 59 ILLEGAL NO STATEMENT	0 THROUGH 59 60 THROUGH 62 63	IN ONE MINUTE INCREMENTS.
792	001	HOUR ----		EXPRESSES TIME OF DAY OR A PERIOD OF TIME IN HOURS.
		0 HOUR 1 THROUGH 23 HOURS ILLEGAL NO STATEMENT	0 1 THROUGH 23 24 THROUGH 30 31	IN ONE HOUR INCREMENTS.

WORD MAP

WORD NUMBER: J13.2C1

WORD TITLE: AIR COMMAND AND CONTROL STATUS CONTINUATION WORD

:	24	23:	22	21:	20	19:	18	17:	16	15	14	13	12	11:	10	09:	08	07:	06	05	04	03	02:	01	00:		
:	:	:	:	:	:	:	LASER	:	:	:	:	:	:	:	:	:	RADAR	:	:	CONTINUATION	WORD	:	:	WORD	:		
:	A/A WRS:	RWR	:	TV STS	:	:	STATUS	:	:	MISSILE CHANNEL				:	:	IR	:	:	STATUS	:	LABEL			:	:	FORMAT	:
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	
:	2	:	2	:	2	:	2	:	:	6				:	2	:	2	:	:	:	5			:	2	:	
:	49:	48	47	46:	45	44	43:	42	41:	40	39	38:	37	36	35:	34	33:	32	31	30:	29	28	27:	26	25:		
:	:	RADIO		:	RADIO TYPE,		:	:	:	RADIO		:	RADIO TYPE,		:	:	:	RADIO		:	RADIO TYPE,		:	:	:		
<---	:	STATUS, 3		:	3		:	SEC 2		:	STATUS, 2		:	2		:	SEC 1		:	STATUS, 1		:	1		:	A/G WRS:	
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	3		:	3		:	2		:	3		:	3		:	2		:	3		:	3		:	2	
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:		
:</																											

WORD DESCRIPTION

WORD NUMBER: J13.2C1

WORD TITLE: AIR COMMAND AND CONTROL STATUS CONTINUATION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550 001		WORD FORMAT	0-	1 2	01
1551 001		CONTINUATION WORD LABEL	2-	6 5	00001
1665 001		RADAR STATUS (RDR STS)	7-	8 2	
1665 002		INFRARED STATUS (IR)	9-	10 2	
852 002		MISSILE CHANNEL	11-	16 6	
1665 005		LASER STATUS (LSR STS)	17-	18 2	
1665 006		TELEVISION STATUS (TV STS)	19-	20 2	
1665 007		RADAR WARNING AND RECEIVING STATUS (RWR)	21-	22 2	
1665 008		AIR-TO-AIR WEAPON RELEASE SYSTEM STATUS (A/A WRS)	23-	24 2	
1665 009		AIR-TO-GROUND WEAPON RELEASE SYSTEM STATUS (A/G WRS)	25-	26 2	
1648 002		RADIO TYPE, 1	27-	29 3	
1666 002		RADIO STATUS, 1	30-	32 3	
1649 002		SECURE RADIO INDICATOR, 1 (SEC 1)	33-	34 2	
1648 003		RADIO TYPE, 2	35-	37 3	SAME CODING AS FOR BITS 27-29.
1666 003		RADIO STATUS, 2	38-	40 3	SAME CODING AS FOR BITS 30-32.
1649 003		SECURE RADIO INDICATOR, 2 (SEC 2)	41-	42 2	SAME CODING AS FOR BITS 33-34.
1648 004		RADIO TYPE, 3	43-	45 3	SAME CODING AS FOR BITS 27-29.
1666 004		RADIO STATUS, 3	46-	48 3	SAME CODING AS FOR BITS 30-32.
1649 004		SECURE RADIO INDICATOR, 3 (SEC 3)	49-	50 2	SAME CODING AS FOR BITS 33-34.
706 001		AUTOPILOT STATUS (AP STS)	51	1	
1351 001		SENSOR TARGET REPORTING STATUS (STR STS)	52	1	
1661 001		AIRCRAFT MODEL	53-	57 5	
804 001		AIR SPECIFIC TYPE	58-	69 12	

FIELD CODING FOR J13.2C1

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1665	001	RADAR STATUS -----		DESCRIBES THE OPERATING STATUS OF A RADAR.
		NO STATEMENT	0	
		SYSTEM OPERATIONAL	1	
		SYSTEM NON-OPERATIONAL	2	
		SYSTEM OFF	3	
1665	002	INFRARED STATUS -----		DESCRIBES THE OPERATING STATUS OF AN INFRARED SYSTEM.
		NO STATEMENT	0	
		SYSTEM OPERATIONAL	1	
		SYSTEM NON-OPERATIONAL	2	
		SYSTEM OFF	3	
852	002	MISSILE CHANNEL -----		SPECIFIES THE MISSILE CHANNEL SELECTED FOR THE WEAPON REPORTED IN TYPE OF STORES, 1.
		NO STATEMENT	0	
		SELECTED CHANNEL 1 THROUGH 63	1 THROUGH 63	
1665	005	LASER STATUS -----		DESCRIBES THE OPERATING STATUS OF A LASER DESIGNATOR.
		NO STATEMENT	0	
		SYSTEM OPERATIONAL	1	
		SYSTEM NON-OPERATIONAL	2	
		SYSTEM OFF	3	
1665	006	TELEVISION STATUS -----		DESCRIBES THE OPERATING STATUS OF A TELEVISION.
		NO STATEMENT	0	
		SYSTEM OPERATIONAL	1	
		SYSTEM NON-OPERATIONAL	2	
		SYSTEM OFF	3	
1665	007	RADAR WARNING AND RECEIVING STATUS -----		DESCRIBES THE OPERATING STATUS OF A RADAR WARNING AND RECEIVING SET.
		NO STATEMENT	0	
		SYSTEM OPERATIONAL	1	
		SYSTEM NON-OPERATIONAL	2	
		SYSTEM OFF	3	

FIELD CODING FOR J13.2C1

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1665	008	AIR-TO-AIR WEAPON RELEASE SYSTEM STATUS ----- NO STATEMENT SYSTEM OPERATIONAL SYSTEM NON-OPERATIONAL SYSTEM OFF	 0 1 2 3	DESCRIBES THE OPERATING STATUS OF AN AIR-TO-AIR WEAPON RELEASE SYSTEM.
1665	009	AIR-TO-GROUND WEAPON RELEASE SYSTEM STATUS ----- NO STATEMENT SYSTEM OPERATIONAL SYSTEM NON-OPERATIONAL SYSTEM OFF	 0 1 2 3	DESCRIBES THE OPERATING STATUS OF AN AIR-TO-GROUND WEAPON RELEASE SYSTEM.
1648	002	RADIO TYPE, 1 ----- NO STATEMENT UHF-AM VHF-AM VHF-FM HF-SSB UPPER HF UHF-FM HF-SSB LOWER	 0 1 2 3 4 5 6 7	SPECIFIES THE TYPE OF RADIO.
1666	002	RADIO STATUS, 1 ----- NO STATEMENT RADIO ON RADIO OFF RADIO NON-OPERATIONAL RECEIVER NON-OPERATIONAL TRANSMITTER NON-OPERATIONAL UNDEFINED	 0 1 2 3 4 5 6 THROUGH 7	DESCRIBES THE OPERATING STATUS OF A RADIO. RADIO IS OPERATIONAL. RADIO IS OPERATIONAL.
1649	002	SECURE RADIO INDICATOR, 1 ----- NO STATEMENT SECURE NOT SECURE UNDEFINED	 0 1 2 3	SPECIFIES WHETHER OR NOT A RADIO IS OPERATING IN THE SECURE MODE.

FIELD CODING FOR J13.2C1

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
706	001	AUTOPILOT STATUS -----		
		MANUAL	0	AIRCRAFT IS UNDER MANUAL CONTROL BY THE PILOT.
		AUTOPILOT	1	AUTOPILOT IS ENGAGED AND AIRCRAFT IS UNDER DATA LINK REMOTE CONTROL.
1351	001	SENSOR TARGET REPORTING STATUS -----		EXPRESSES SENSOR TARGET REPORTING STATUS.
		REPORTING ALL	0	AIRCRAFT IS REPORTING ALL LOCALLY DERIVED TARGETS ON THE CONTROL NPG.
		NOT REPORTING ALL	1	AIRCRAFT IS NOT REPORTING ALL LOCALLY DERIVED TARGETS ON THE CONTROL NPG. ENGAGEMENT STATUS REPORTING IS NOT INHIBITED.
1661	001	AIRCRAFT MODEL -----		AN ALPHA CHARACTER SUFFIX USED TO DESIGNATE A CERTAIN VERSION OF AN ALPHA/NUMERIC AIRCRAFT DESIGNATOR.
		NO STATEMENT	0	
		A	1	
		B	2	
		C	3	
		D	4	
		E	5	
		F	6	
		G	7	
		H	8	
		I	9	
		J	10	
		K	11	
		L	12	
		M	13	
		N	14	
		O	15	
		P	16	
		Q	17	
		R	18	
		S	19	
		T	20	
		U	21	
		V	22	
		W	23	
		X	24	

FIELD CODING FOR J13.2C1

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1661	001	AIRCRAFT MODEL -----	(CONTINUED)	
		Y	25	
		Z	26	
		ILLEGAL	27 THROUGH 31	
804	001	AIR SPECIFIC TYPE -----		THE SPECIFIC TYPE OF POINT OR TRACK WITH AN ENVIRONMENT/CATEGORY OF AIR.
		NO STATEMENT	0	
		----- FIGHTER -----		
		F-4 PHANTOM II	1	
		F-5 TIGER II	2	
		F-8 CRUSADER	3	
		F-14 TOMCAT	4	
		F-15 EAGLE	5	
		F-16 FIGHTING FALCON	6	
		F-101 VOODOO	7	
		F-104 STARFIGHTER	8	
		F-105 THUNDERCHIEF	9	
		F-106 DELTA DART	10	
		F-111 (GENERAL DYNAMICS)	11	
		F/A-18 HORNET	12	
		EFA	13	
		F-102	14	
		F-100	15	
		DISUSED	16	
		DISUSED	17	
		COMMANDO	18	
		DISUSED	19	
		DISUSED	20	
		J-35 DRAGEN	21	
		JAGUAR	22	
		SUPER ETENDARD	23	
		DISUSED	24 THROUGH 26	
		F-1 (MITSUBISHI)	27	
		F-35XD DRAGEN	28	
		DISUSED	29	
		HF-24 MARUT (WIND SPIRIT)	30	
		JA37 VIGGEN	31	

FIELD CODING FOR J13.2C1

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		DISUSED	32	
		SF-5 FREEDOM FIGHTER	33	
		IAR-91 ORAO	34	
		AJEET INVINCIBLE	35	
		KFIR C2	36	
		MIRAGE F1	37	
		MIRAGE 3	38	
		MIRAGE 5	39	
		MIRAGE 50	40	
		MIRAGE 2000	41	
		DISUSED	42	
		DISUSED	43	
		ALPHA JET	44	
		KEFIR	45	
		F-6 FARMER	46	
		F-8 FISHBED	47	
		F-9 FANTAN	48	
		F-12 (CHINA)	49	
		SU-7 FITTER	50	
		SU-9 FISHPOT	51	
		SU-11 FLAGON	52	
		SU-15 FLAGON	53	
		SU-17 FITTER	54	
		SU-19 FENCER	55	
		SU-20 FITTER	56	
		SU-22 FITTER	57	
		SU-24 FENCER	58	
		SU-25 FROGF00T	59	
		TU-28 FIDDLER	60	
		TU-128 FIDDLER	61	
		MIG-21 FISHBED	62	
		MIG-23 FLOGGER	63	
		MIG-25 FOXBAT	64	
		MIG-27 FLOGGER	65	
		YAK-28 FIREBAR	66	
		YAK-36 FORGER	67	
		AAF "RAM-J"	68	
		MIG-15 FAGOT	69	
		MIG-17 FRESCO	70	
		MIG-19 FARMER	71	
		SU-27 FLANKER	72	
		MIG-29 FULCRUM	73	
		MIG-31 FOXHOUND	74	

FIELD CODING FOR J13.2C1

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		YAK-38 FORGER-A	75	
		F-22 RAPTOR	76	
		F-84 THUNDERSTREAK	77	
		F-86 SABRE	78	
		F/A2 SEA HARRIER	79	
		IDF CHING-KUO (TAIWAN)	80	
		JAS-39 GRIPPEN	81	
		JIAN JI-7	82	
		JIAN JI-8-2	83	
		JOINT STRIKE FIGHTER	84	
		KFIR C7	85	
		KFIR 2000	86	
		RAFALE	87	
		SU-30	88	
		SU-33 (SU-27K)	89	
		SU-34	90	
		SU-35	91	
		SU-37	92	
		SU-39	93	
		YAK-141 FREESTYLE	94	
		F-5 FRESCO	95	
		F-7 FISHBED	96	
		J-9	97	
		RT33	98	
		CF-188 HORNET	99	
		UNDEFINED	100	
		TORNADO F3	101	
		SEA HARRIER	102	
		F-5 NORTHROP	103	
		UNDEFINED	104 THROUGH 254	
		FIGHTER GENERAL	255	

		BOMBERS/ATTACK		

		A-4 SKYHAWK	256	
		A-6 INTRUDER	257	
		A-7 CORSAIR II	258	
		A-10 THUNDERBOLT II	259	
		A-37 DRAGONFLY	260	
		B-1 (ROCKWELL)	261	
		B-52 STRATOFORTRESS	262	

FIELD CODING FOR J13.2C1 (SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		AC-130 HERCULES	263	
		AV-8 HARRIER	264	
		F/A-18 HORNET	265	
		FB-111 (GENERAL DYNAMICS)	266	
		A-1	267	
		TA-28	268	
		DISUSED	269	
		AC-47	270	
		AC-119	271	
		AC-124	272	
		ALPHA JET	273	
		DISUSED	274 THROUGH 276	
		35XD DRAGEN	277	
		J-1 HAWK	278	
		J-1 JAESTREB	279	
		S-2	280	
		AJ37 VIGGEN	281	
		HA220 SUPER SAETA	282	
		M.B.326 (AERMACCHI)	283	
		M.B.339 (AERMACCHI)	284	
		SF 260 WARRIER	285	
		SK 60 (SAAB)	286	
		BAC 167 STRIKEMASTER	287	
		TORNADO GR-1 (IDS)	288	
		IL-28 BEAGLE	289	
		MI-4 BISON	290	
		TU-16 BADGER	291	
		TU-22 BLINDER	292	
		TU-22M BACKFIRE	293	
		TU-95 BEAR	294	
		TU-142 BEAR	295	
		YAK-28 BREWER	296	
		SUPER ENTENDARD	297	
		TU-160 BLACKJACK	298	
		AMX	299	
		FRS1 SEA HARRIER	300	
		FRS2 SEA HARRIER	301	
		FRS51 SEA HARRIER	302	
		F-117 NIGHTHAWK	303	
		G4 SUPER GALEB	304	
		G91Y	305	
		HAWK-2000	306	

FIELD CODING FOR J13.2C1

(SHEET 8)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		HAWK-100	307	
		HAWK-200	308	
		HAWK-50	309	
		HAWK-60	310	
		IA-58 PUCARA	311	
		IAR-93 ORAO	312	
		IAR-99 SOIM	313	
		JIAN JI-5M	314	
		A-5 FANTAN	315	
		L59 ALBATROS	316	
		B-2 SPIRIT	317	
		B-7 HONGZHA	318	
		1050E	319	
		A3 LEI MING	320	
		HARRIER GR4/7	321	
		TORNADO GR4	322	
		AV-8B HARRIER PLUS	323	
		CF-188 HORNET	324	
		RAFALE	325	
		UNDEFINED	326 THROUGH 510	
		BOMBER/ATTACK GENERAL	511	

		PATROL/RECON/ELECTRONIC/ TANKER/GENERAL		

		E-2 HAWKEYE	512	
		E-3 SENTRY (AWACS)	513	
		E-4 NEACP	514	
		EA-3	515	
		EA-6 PROWLER	516	
		EB-57 (DOUGLAS)	517	
		EC-130 HERCULES	518	
		EC-135 (BOEING)	519	
		EF-4 WILD WEASEL	520	
		EF-111 (GENERAL DYNAMICS)	521	
		EP-3 ORION	522	
		KA-3 (DOUGLAS)	523	
		KA-6 (GRUMMAN)	524	
		KC-10 EXTENDER	525	
		KC-130 HERCULES	526	

FIELD CODING FOR J13.2C1

(SHEET 9)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		KC-135 STRATOTANKER	527	
		O-1 BIRD DOG	528	
		O-2 (CESSNA)	529	
		OV-1 MOHAWK	530	
		OV-10 BRONCO	531	
		P-2 NEPTUNE	532	
		P-3 ORION	533	
		RC-130 HERCULES	534	
		RC-135 (BOEING)	535	
		RF-4 PHANTOM II	536	
		RF-5 (NORTHROP)	537	
		RF-8 CRUSADER	538	
		RF-14 TOMCAT	539	
		RF-104 STARFIGHTER	540	
		RP-3 ORION	541	
		RU-21 UTE	542	
		S-2 TRACKER	543	
		S-3 VIKING	544	
		SR-71 BLACKBIRD	545	
		U-2 (LOCKHEED)	546	
		U-4 AERO COMMANDER	547	
		U-5 H-500 TWIN	548	
		U-8 SEMINOLE	549	
		U-10 COURIER	550	
		UC-12 HURON	551	
		U-21 UTE	552	
		US-3 VIKING	553	
		OA-37 DRAGONFLY	554	
		TR-1	555	
		WC-130 HERCULES	556	
		E-1 TRACER	557	
		EB-66	558	
		EC-121	559	
		RA-3	560	
		SEA SCAN	561	
		FALCON 20 GUARDIAN	562	
		BR 1150 ATL1	563	
		RF-35XD DRAKEN	564	
		BN-2 MARITIME DEFENDER	565	
		DISUSED	566 THROUGH 567	
		CP-140 AURORA	568	
		HS.748 COASTGUARDER	569	
		HS.801 NIMROD	570	

FIELD CODING FOR J13.2C1

(SHEET 10)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	
		DISUSED	571	
		MK.3	572	
		RJ-1 HAWK	573	
		RJ-1 JAESTREB	574	
		SS-2	575	
		PEACE SENTINEL	576	
		KC-97	577	
		AU-24	578	
		AU-23	579	
		U-21	580	
		U-17	581	
		HU-16	582	
		U-9	583	
		U-3	584	
		RU-21	585	
		NKC-135	586	
		RF-101	587	
		RF-111	588	
		RB-57	589	
		RB-66	590	
		RC-121	591	
		BE-12 MAIL	592	
		IL-38 MAY	593	
		TU-126 MOSS	594	
		BE-6	595	
		VC-10 (TANKER)	596	
		AN-12 CUB-A (ELINT)	597	
		AN-12 CUB-C (EA)	598	
		AN-12 CUB-D (EA)	599	
		IL-20 COOT-A (ELINT)	600	
		IL-76 MAINSTAY	601	
		E-8 (J STARS)	602	
		TORNADO ECR	603	
		E-6 MERCURY	604	
		EMB-111	605	
		MU-2S	606	
		A40 ALBATROS	607	
		BE42 ALBATROS	608	
		CL215 AMPHIBIAN	609	
		IAI 1125	610	
		IL22 COOT B	611	
		J32 LANSEN	612	
		SH5 HARBIN	613	

FIELD CODING FOR J13.2C1

(SHEET 11)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		TIER1	614	
		TIER2	615	
		TIER3	616	
		US1 (SHIN)	617	
		C-212 CASA	618	
		CESSNA 550 CITATION II	619	
		CESSNA 560 CITATION V	620	
		CL 215 CANADAIR	621	
		DORNIER 27	622	
		F-27 FOKKER	623	
		NIMROD MRA4	624	
		CP-140A AURORA/ARCTURUS	625	
		RC-135 RIVET JOINT	626	
		ATL 2	627	
		ETENDARD IV P	628	
		ALIZE	629	
		FALCON 50	630	
		MIRAGE IV	631	
		MIRAGE 2000	632	
		BR 1150 GE ATL ASW	633	
		BR 1150 GE ATL SIGINT	634	
		C-130 HERCULES TANKER	635	
		ASTOR	636	
		UNDEFINED	637 THROUGH 761	
		TANKER	762	
		RECONNAISSANCE (RECON)	763	
		ELECTRONIC WARFARE (EW)	764	
		ASW	765	
		AEW AND C	766	
		MISCELLANEOUS GENERAL	767	

		TRAINER		

		T-2 BUCKEYE	768	
		T-28 TROJAN	769	
		T-29 (CONVAIR)	770	
		T-34 MENTOR	771	
		T-37 TWEET	772	
		T-38 TALON	773	
		T-39 SABERLINER	774	
		T-41 MESCALERO	775	

FIELD CODING FOR J13.2C1

(SHEET 12)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		T-42 CONCHISE	776	
		T-43 (BOEING)	777	
		T-44 KING AIR	778	
		TA-4 SKYHAWK	779	
		TA-7 CORSAIR II	780	
		T-33	781	
		ALPHA JET	782	
		B3LA (SAAB)	783	
		C-101 AVIOJET	784	
		G2-A GALEB	785	
		G2-A SEAGULL	786	
		L-29 DELFIN	787	
		L-29 MAYA	788	
		L-39 ALBATROS	789	
		L-70 MILTRAINER	790	
		L-450	791	
		P.55 (PARTENAVIA)	792	
		T-2 (MITSUBISHI)	793	
		CM 170 MAGISTER	794	
		M.B.339 (AERMACCHI)	795	
		T-2 (MITSUBISHI)	796	
		CM AU/ MAGISTER	797	
		M.B.339 (AERMACCHI)	798	
		SF-260 (SIAI-MARCHETTI)	799	
		SH 37 VIGGEN	800	
		QH-50 DRAKEN	801	
		SK 37 VIGGEN	802	
		SK 60 (SAAB)	803	
		TB30 EPSILON	804	
		TF-35XD	805	
		TJ-1 HAWK	806	
		TJ-1 JASTRAEB	807	
		TS.11 SPARK	808	
		AW1-2 FAN TRAINER	809	
		DISUSED	810	
		HJT-16 KIRAN	811	
		MBB223 FLAMINGO	812	
		SU-11 MAIDEN	813	
		SU-15	814	
		MIG-15 MIDGET	815	
		MIG-17	816	
		MIG-21 MONGOL	817	
		MIG-23	818	

FIELD CODING FOR J13.2C1

(SHEET 13)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		MIG-25	819	
		YAK-11 MOOSE	820	
		YAK-18 MAX	821	
		YAK-28 MAESTRO	822	
		TF-104 STARFIGHTER	823	
		T-46A	824	
		EMB-312 TOUCAN	825	
		T-45 GOSHAWK	826	
		T-47	827	
		AS202	828	
		CT114 TUTOR	829	
		G91T (FIAT JET 1)	830	
		K8 (NAMC)	831	
		L70 VINKA	832	
		STRIKEMASTER (BAE)	833	
		T1 JAYHAWK	834	
		T4 (KAWASAKI)	835	
		CT-142 DASH 8	836	
		B-55 BARON	837	
		F-33 BONANZA	838	
		839 PILLAN-TAMIZ	839	
		CT-133 SILVERSTAR	840	
		UNDEFINED	841 THROUGH 1022	
		TRAINER GENERAL	1023	

		TRANSPORT/AIRLINER		

		C-1 (GRUMMAN COD)	1024	
		C-2 GREYHOUND	1025	
		C-5 GALAXY	1026	
		C-7 CARIBOU	1027	
		C-9 NIGHTINGALE	1028	
		C-12 HURON	1029	
		C-123 PROVIDER	1030	
		C-130 HERCULES	1031	
		C-135 STRATOLIFTER	1032	
		C-140 JETSTAR	1033	
		C-141 STARLIFTER	1034	
		HC-130 HERCULES	1035	
		VC-6 KING AIR	1036	
		VC-9 SKYTRAIN II	1037	

FIELD CODING FOR J13.2C1

(SHEET 14)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		VC-11 GULFSTREAM	1038	
		VC-137 (BOEING)	1039	
		707 (BOEING)	1040	
		720 (BOEING)	1041	
		727 (BOEING)	1042	
		737 (BOEING)	1043	
		747 (BOEING)	1044	
		757 (BOEING)	1045	
		767 (BOEING)	1046	
		L-100 HERCULES	1047	
		L-1011 TRI STAR	1048	
		DC-8 (DOUGLAS)	1049	
		DC-9 (DOUGLAS)	1050	
		DC-10 (DOUGLAS)	1051	
		C-119	1052	
		DC-130	1053	
		HC-97	1054	
		C-JM	1055	
		C-54	1056	
		C-97	1057	
		C-118	1058	
		C-119	1059	
		C-121	1060	
		C-124	1061	
		C-131	1062	
		C-133	1063	
		VC-47	1064	
		CV-54	1065	
		CV-140	1066	
		ARAVA	1067	
		CONCORDE	1068	
		ISLANDER	1069	
		SKYVAN	1070	
		TRIDENT	1071	
		A300 AIRBUS	1072	
		A310 AIRBUS	1073	
		C-1 (KAWASKI)	1074	
		C-160 TRANSALL	1075	
		C.207 AZOR	1076	
		C-212 AVIOCAR	1077	
		F27 FRIENDSHIPS	1078	
		F28 FELLOWSHIP	1079	
		G222 SAMA	1080	

FIELD CODING FOR J13.2C1

(SHEET 15)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		AW.660 ARGOSY	1081	
		BAC111 ONE-ELEVEN	1082	
		DHC-5 BUFFALO	1083	
		DHC-7 DASH	1084	
		AN-2 COLT	1085	
		AN-10 CAT	1086	
		AN-12 CUB	1087	
		AN-14 CLOD	1088	
		AN-22 COCK	1089	
		AN-24 COKE	1090	
		AN-26 CURL	1091	
		AN-28 CASK	1092	
		AN-30 CLANK	1093	
		AN-32 CLINE	1094	
		AN-40 (VERY LARGE TURBO- PROP)	1095	
		AN-72 COALER	1096	
		IL-12 COACH	1097	
		IL-18 COOT	1098	
		IL-62 CLASSIC	1099	
		IL-76 CANDID	1100	
		IL-86 CAMBER	1101	
		TU-114 CLEAT	1102	
		TU-134 CRUSTY	1103	
		TU-144 CHARGER	1104	
		TU-154 CARELESS	1105	
		YAK-40 CODDLING	1106	
		YAK-42 CLOBBER	1107	
		TU-104	1108	
		YAK-27	1109	
		IL-38	1110	
		DISUSED	1111	
		DO-228 LT (TRANSPORT)	1112	
		DISUSED	1113	
		AN-74	1114	
		AN-124 CONDOR	1115	
		A320 AIRBUS	1116	
		A321 AIRBUS	1117	
		A330 AIRBUS	1118	
		A340 AIRBUS	1119	
		AN-70	1120	
		AN-225 COSSACK	1121	
		BAE-125-600	1122	

FIELD CODING FOR J13.2C1

(SHEET 16)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		BAE146	1123	
		777 (BOEING)	1124	
		C-17 GLOBEMASTER III	1125	
		C-20 GULFSTREAM 3/4	1126	
		C-21 LEARJET 35	1127	
		C-22	1128	
		C-23 SHERPA/SHORTS 330	1129	
		C-26 METRO 3	1130	
		YS 11 (NAMC)	1131	
		CL-600 CHALLENGER	1132	
		CL-601 CHALLENGER	1133	
		CN-235M (AIRTECH)	1134	
		EMB-120 BRASILLIA ADV	1135	
		EMB-145 AMAZON	1136	
		IL-78 MIDAS	1137	
		MD-11	1138	
		MD-80	1139	
		MD-90	1140	
		PD-808	1141	
		TU-44	1142	
		V-22 OSPREY	1143	
		VC-25	1144	
		XC-2	1145	
		1124 (IAI)	1146	
		1900 (BEECH)	1147	
		330 (SHORTS)	1148	
		580 (CONVAIR)	1149	
		ATR42	1150	
		B55 BARON	1151	
		BN2 ISLANDER	1152	
		C46 COMMANDO	1153	
		CARAVELL (SUD)	1154	
		CC109 (CANADAIR)	1155	
		CHALLENGER (CANADAIR)	1156	
		DHC2	1157	
		DHC6 TWIN OTTER	1158	
		DHC8	1159	
		EMB110 BANDEIRANTE	1160	
		EMB121	1161	
		FALCON 200/FALCON 20	1162	
		FALCON 50	1163	
		FALCON 900	1164	
		FH227 FRIENDSHIP	1165	

FIELD CODING FOR J13.2C1

(SHEET 17)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		FOKKER 100	1166	
		FOKKER 50	1167	
		FOKKER 60	1168	
		FOKKER 70	1169	
		GROB G850	1170	
		GULFSTREAM 1	1171	
		GULFSTREAM 2	1172	
		JETSTREAM	1173	
		JETSTREAM 31	1174	
		KING AIR	1175	
		L410 TURBOJET	1176	
		LEARJET 23	1177	
		LEARJET 24	1178	
		LEARJET 25 (IMPROVED VER	1179	
		28)		
		LEARJET 35/36	1180	
		LEARJET 55 (IMPROVED VER	1181	
		28)		
		LEARJET 60	1182	
		MERLIN 2	1183	
		MERLIN 3	1184	
		MERLIN 4	1185	
		METRO 3	1186	
		SAAB 2000	1187	
		SAAB 340	1188	
		SABRELINER	1189	
		U6 BEAVER	1190	
		VISCOUNT	1191	
		W3 SOKOL	1192	
		Y11 (HAMC)	1193	
		Y12 (HAMC)	1194	
		Y5	1195	
		CC-115 BUFFALO	1196	
		CC-130 HERCULES	1197	
		CC-150 POLARIS	1198	
		C-235 CASA	1199	
		CC-138 TWIN OTTER	1200	
		DO-228 LM (POLLUTION	1201	
		CONTROL)		
		UNDEFINED	1202 THROUGH 1277	
		LIGHT CIVIL	1278	
		TRANSPORT/AIRLINER	1279	
		GENERAL		

FIELD CODING FOR J13.2C1

(SHEET 18)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		HELICOPTERS		

		AH-1 COBRA	1280	
		AH-64 APACHE	1281	
		CH-3 (SIKORSKY)	1282	
		CH-46 (SEA KNIGHT)	1283	
		CH-47 CHINOOK	1284	
		CH-53 SEA STALLION	1285	
		CH-54 LARKE (SKYCRANE)	1286	
		EH-60 QUICK FOX	1287	
		HH-1 IROQUOIS	1288	
		HH-2 SEA SPRITE	1289	
		HH-3 JOLLY GREEN	1290	
		HH-52 (SIKORSKY)	1291	
		HH-53 (SIKORSKY)	1292	
		OH-6 (HUGHES)	1293	
		OH-58 KIOWA	1294	
		RH-3 SEA KING	1295	
		RH-53 (SIKORSKY)	1296	
		SH-2 SEA SPRITE	1297	
		SH-3 SEA KING	1298	
		SH-60 SEA HAWK	1299	
		UH-1 IROQUOIS	1300	
		UH-2 SEA SPRITE	1301	
		UH-12 (HILLER)	1302	
		UH-46 (BOEING)	1303	
		UH-60 BLACK HAWK	1304	
		CH-2U	1305	
		HH-43	1306	
		A109 (AGUSTA)	1307	
		A129 MONGOOSE	1308	
		BO-105 (MBB)	1309	
		DISUSED	1310	
		CH-124 SEA KING	1311	
		DISUSED	1312 THROUGH 1314	
		SA 315 LAMA	1315	
		DISUSED	1316	
		DISUSED	1317	
		SA 321 SUPER FRELON	1318	
		SA 330 PUMA	1319	
		SA 332 SUPER PUMA	1320	

FIELD CODING FOR J13.2C1

(SHEET 19)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		S 342 GAZELLE	1321	
		SA 350 ASTAR	1322	
		SA 360 DAUPHIN	1323	
		SA 361 DAUPHIN	1324	
		WG-13 LYNX	1325	
		WG-34 (WESTLAND)	1326	
		KA-18 HOG	1327	
		KA-20 HARP	1328	
		KA-25 HORMONE	1329	
		KA-26 HOODLUM	1330	
		MI-1 HARE	1331	
		MI-2 HOPLITE	1332	
		MI-4 HOUND	1333	
		MI-6 HOOK	1334	
		MI-8 HIP	1335	
		MI-10 HARKE	1336	
		MI-12 HOMER	1337	
		MI-14 HAZE	1338	
		MI-24 HIND	1339	
		MI-26 HALO	1340	
		CH-53E SUPER STALLION	1341	
		MH-53E SEA DRAGON	1342	
		HH-60 NIGHT HAWK	1343	
		HH-65A DOLPHIN	1344	
		KA-27 HELIX-A (ASW)	1345	
		KA-32 HELIX	1346	
		MI-17 HIP-H	1347	
		MI-28 HAVOC	1348	
		ECUREUIL/FENNEL/ESQILO	1349	
		KA-29 HELIX-B	1350	
		KA-50 HOKUM	1351	
		204 BELL	1352	
		205 BELL	1353	
		206 BELL	1354	
		214 BELL	1355	
		280 ENSTROM	1356	
		300 SCHWEIZER	1357	
		406 COMBAT SCOUT	1358	
		A 109 HIRUNDO	1359	
		A 129 MANGUSTA	1360	
		AH 6 CAYUSE	1361	
		ALOUETTE 2	1362	
		ALOUETTE 3	1363	

5.3-66

MIL-STD-6016B

FIELD CODING FOR J13.2C1

(SHEET 20)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		AS 350 ECUREUIL	1364	
		AS 532 COUGAR	1365	
		AS 550 FENNEC	1366	
		AS 555 FENNEC	1367	
		AS 565 PANTHER	1368	
		CH 34 WESTLAND	1369	
		EH 101	1370	
		HAS 1 WASP	1371	
		KA-28 HELIX A	1372	
		MD 500 DEFENDER	1373	
		MI 22	1374	
		MI 25	1375	
		MI 35	1376	
		MI 9	1377	
		SA 341 GAZELLE	1378	
		SA 342 GAZELLE	1379	
		SA 365 DAUPHIN 2	1380	
		TS11 ISKRA	1381	
		WESSEX	1382	
		Z9 (HARBIN)	1383	
		CH-146 GRIFFON	1384	
		SEA KING AEW (SKW)	1385	
		EH 101 MERLIN	1386	
		AB-212 AUGUSTA BELL	1387	
		BO-105 BOLKOW	1388	
		CH-47 CHINOOK	1389	
		HUGHES 500	1390	
		HUGHES 3000	1391	
		SH-3D SIKORSKY	1392	
		SH-70L SIKORSKY	1393	
		CH-113 LABRADOR	1394	
		NH 90 (C2)	1395	
		NH 90 (RECCE)	1396	
		NH 90 (EW/SEAD)	1397	
		NH 90 (TRANSPORT)	1398	
		SEA LYNX MK88A	1399	
		SEA KING MK41 (KWS)	1400	
		TIGER (HAP)	1401	
		NH 90 (NAVY)	1402	
		TIGER (HAC)	1403	
		SA 341 GAZELLE CANON	1404	
		AS 532 COUGAR HORIZON	1405	
		AW-520 SAR CORMORANT	1406	

FIELD CODING FOR J13.2C1 (SHEET 21)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		UNDEFINED	1407 THROUGH 1534	
		HELICOPTER GENERAL	1535	

		AIR-AIR MISSILES		

		AIM-4A FALCON	1536	
		AIM-7 SPARROW	1537	
		AIM-9 SIDEWINDER	1538	
		AIM-54 PHOENIX	1539	
		AIM-2A GENIE	1540	
		AIM-120 AMRAAM	1541	
		ASLAM	1542	
		R.530	1543	
		R.550 MAGIC	1544	
		S.530 SUPER 530	1545	
		ASPIDE	1546	
		DISUSED	1547	
		SHAFRIR	1548	
		SKY FLASH	1549	
		DISUSED	1550	
		AA-2 ATOLL	1551	
		AA-3 ANAB	1552	
		AA-5 ASH	1553	
		AA-6 ACRID	1554	
		AA-7 APEX	1555	
		AA-8 APHID	1556	
		AAM	1557	
		AA-9 AMOS	1558	
		AA-XP-1/2	1559	
		AQM-34	1560	
		AQM-91	1561	
		BGM-34 FIREBEE/MQM34	1562	
		YQM-94	1563	
		YQM-98	1564	
		AIM-132 ASRAAM	1565	
		MICA	1566	
		PL-2A	1567	
		PL-5B	1568	
		PL-7	1569	
		PL-9	1570	
		PYTHON 3	1571	

FIELD CODING FOR J13.2C1 (SHEET 22)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		PYTHON 4	1572	
		AA-10 ALAMO	1573	
		AA-11 ARCHER	1574	
		AA-12 ADDER	1575	
		AA-1 ALKALI	1576	
		AAM-1	1577	
		UNDEFINED	1578 THROUGH 1790	
		AIR-TO-AIR MISSILE	1791	
		GENERAL		

		AIR-GROUND/GROUND-		
		GROUND MISSILES		

		AGM-45 SHRIKE	1792	
		AGM-65 MAVERICK	1793	
		AGM-69 SRAM	1794	
		AGM-78 STANDARD ARM	1795	
		AGM-84 HARPOON	1796	
		AGM-86 ALCM	1797	
		AGM-88 HARM	1798	
		AGM-109 TOMAHAWK	1799	
		AM 39 EXOCET	1800	
		AGM-119 PENGUIN	1801	
		AS 11 KILTER	1802	
		AS 12 KEGLER	1803	
		AS 15 KENT	1804	
		AS 30	1805	
		DISUSED	1806	
		RB 05	1807	
		RB 08	1808	
		ADVANCED ASM	1809	
		AS-1 KENNEL	1810	
		AS-2 KIPPER	1811	
		AS-3 KANGAROO	1812	
		AS-4 KITCHEN	1813	
		AS-5 KELT	1814	
		AS-6 KINGFISH	1815	
		AS-7 KERRY	1816	
		DISUSED	1817	
		AS-10 KAREN	1818	
		AS-9 KYLE	1819	

FIELD CODING FOR J13.2C1

(SHEET 23)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		AS 34 KORMORAN	1820	
		ASM GABRIEL	1821	
		ASM SEA SKUA	1822	
		ASM SEA EAGLE	1823	
		ASMP	1824	
		AT-2 SWATTER	1825	
		AT-3 SAGGER	1826	
		AT-6 SPIRAL	1827	
		C-601	1828	
		C-611	1829	
		C-801	1830	
		C-802	1831	
		CSS-2	1832	
		CSS-3	1833	
		CSS-N-3	1834	
		CSS-X-4	1835	
		FL-2 SILKWORM	1836	
		FL-7	1837	
		HY-2	1838	
		HY-3	1839	
		M-9/11	1840	
		WS-1	1841	
		AS-13 KINGBOLT	1842	
		AS-14 KEDGE	1843	
		AS-16 KICKBACK	1844	
		AS-17 KRYPTON	1845	
		AS-18 KAZOO	1846	
		AT-4 SPIGOT	1847	
		AT-5 SPANDREL	1848	
		AT-7 SAXHORN	1849	
		AT-10 STABBER	1850	
		AT-11 SNIPER	1851	
		AT-12	1852	
		AT-13	1853	
		AT-14	1854	
		FROG-7	1855	
		SS-1 SCUD	1856	
		SS-11 SEGO	1857	
		SS-13 SAVAGE	1858	
		SS-18 SATAN	1859	
		SS-19 STILETTO	1860	
		SS-24 SCALPEL	1861	
		SS-25 SICKLE	1862	

FIELD CODING FOR J13.2C1 (SHEET 24)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		SS-N-2 STYX	1863	
		SS-N-3 SHADDOCK	1864	
		SS-N-6 SERB	1865	
		SS-N-7 STARBRIGHT	1866	
		SS-N-8 SAWFLY	1867	
		SS-N-9 SIREN	1868	
		SS-N-12 SANDBOX	1869	
		SS-N-18 STINGRAY	1870	
		SS-N-19 SHIPWRECK	1871	
		SS-N-20 STURGEON	1872	
		SS-N-21 SAMPSON	1873	
		SS-N-22 SUNBURN	1874	
		SS-N-23 SKIFF	1875	
		SS-N-26	1876	
		AGNI	1877	
		PRITHVI	1878	
		TOW	1879	
		AGM-114 HELLFIRE	1880	
		MLRS	1881	
		HOT	1882	
		MILAN	1883	
		TRIGAT	1884	
		OTOMAT	1885	
		RBS-15M	1886	
		ARMAT	1887	
		ALARM	1888	
		AGM-12 BULLPUP	1889	
		AGM-62A WALLEYE	1890	
		AGM-123A SKIPPER II	1891	
		APACHE (ASM)	1892	
		AS 8	1893	
		AT-1 SWATTER	1894	
		CAS1	1895	
		KH-41 MOSKIT	1896	
		MARTIN PESCADOR	1897	
		MAS1 CARCARA	1898	
		RB 04E	1899	
		STAR	1900	
		SEA INDIGO	1901	
		MM 38	1902	
		MM 40	1903	
		SM 39	1904	
		AS 34 KORMORAN II	1905	

FIELD CODING FOR J13.2C1

(SHEET 25)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		UNDEFINED	1906 THROUGH 2046	
		AIR-GROUND MISSILE	2047	
		GENERAL		

		SURFACE TO AIR MISSILES		

		FIM-92 STINGER	2048	
		NIM-23 HAWK	2049	
		MIM-42 REDEYE	2050	
		MIM-72 CHAPARRAL	2051	
		MIM-104 PATRIOT	2052	
		RIM-2 TERRIER	2053	
		RIM-7 SEA SPARROW	2054	
		RIM-8 TALOS	2055	
		RIM-24 TARTAR	2056	
		RIM-66 STANDARD MISSILE	2057	
		RIM-67 STANDARD MISSILE	2058	
		BLOWPIPE	2059	
		DISUSED	2060 THROUGH 2061	
		SEA DART	2062	
		DISUSED	2063	
		SEA WOLF	2064	
		S 440 CROTALE EDIR	2065	
		RAPIER	2066	
		RBS-70 (SLM)	2067	
		DISUSED	2068	
		SAM ROLAND	2069	
		SA-2 GUIDELINE	2070	
		SA-3 GOA	2071	
		SA-4 GANEF	2072	
		SA-N-3 GOBLET	2073	
		SA-5 GAMMON	2074	
		SA-N-4 GECKO	2075	
		SA-6 GAINFUL	2076	
		SA-N-6 GRUMBLE	2077	
		SA-7 GRAIL	2078	
		SA-8 GECKO	2079	
		SA-9 GASKIN	2080	
		SA-10 GRUMBLE	2081	
		SA-11 GADFLY	2082	
		SA-12	2083	

FIELD CODING FOR J13.2C1

(SHEET 26)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		SA-13 GOPHER	2084	
		MISTRAL	2085	
		SA-N-7 GADFLY	2086	
		SA-N-8 GREMLIN	2087	
		SA-14 GREMLIN	2088	
		SA-16 GIMLET	2089	
		SA-X-17	2090	
		SA-N-5 GRAIL	2091	
		SA-N-11 GRISOM	2092	
		SA-12A GLADIATOR	2093	
		SA-12B GIANT	2094	
		SA-14 GREMLIN	2095	
		SA-15 GAUNTLET	2096	
		SA-17 GRIZZLY	2097	
		SA-N-12 GRIZZLY	2098	
		SA-18 GROUSE	2099	
		SA-19 GRISOM	2100	
		RIM-116 RAM	2101	
		ADATS	2102	
		JAVELIN	2103	
		STARBURST	2104	
		STARSTREAK	2105	
		ASPIDER	2106	
		I-HAWK	2107	
		ROLAND II	2108	
		SM-2 BLOCK II	2109	
		SM-2 BLOCK III	2110	
		SM-2 BLOCK IIIA	2111	
		SM-2 BLOCK IIIB	2112	
		SM-2 BLOCK IV	2113	
		SM-2 BLOCK IVA	2114	
		SM-3 LEAP	2115	
		AKASH	2116	
		ANZA	2117	
		ANZA II	2118	
		CSA-1	2119	
		CSA-2	2120	
		CSA-4	2121	
		CSA-5	2122	
		FM-80	2123	
		HN-5	2124	
		NK-7	2125	
		NK-16	2126	

FIELD CODING FOR J13.2C1

(SHEET 27)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		PANTZYR	2127	
		RAPIER 2000/JERNAS	2128	
		RBS-90	2129	
		SAKR	2130	
		SAVA	2131	
		SHANINE	2132	
		SKYGUARD ASPIDE	2133	
		SPADA	2134	
		TAM SAM	2135	
		TIGERCAT	2136	
		VANGUARD	2137	
		SA-N-1 GOA	2138	
		SA-N-9 GAUNTLET	2139	
		SA-N-10	2140	
		ALBATROS/ASPIDE	2141	
		SM-1	2142	
		VT1 CROTALE	2143	
		MASURCA	2144	
		ASTER 15	2145	
		ASTER 30	2146	
		UNDEFINED	2147 THROUGH 4093	
		RESET TO NO STATEMENT	4094	
		SURFACE-TO-AIR MISSILE	4095	
		GENERAL		

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J13.2C2

WORD TITLE: AIR STORES STATUS CONTINUATION WORD

24	23	22:	21	20	19	18	17	16	15	14:	13	12	11	10	09	08:	07:	06	05	04	03	02:	01	00:		
<---			:	TYPE OF STORES, 1							:	NUMBER OF STORES, 1					:	SUM:	CONTINUATION WORD				:	WORD	:	
			:								:						:	IND:	LABEL				:	FORMAT	:	
			:								:						:	:					:	:	:	
			:	8							:	6					:	1	:	5				:	2	:
:	49	48	47	46	45	44	43	42:	41	40	39	38	37	36:	35	34	33	32	31	30	29	28:	27	26	25	
:	TYPE OF STORES, 3							:	NUMBER OF STORES, 3					:	TYPE OF STORES, 2					:	NUMBER OF				:	
:								:						:						:	STORES, 2				:	
:	8							:	6					:	8					:	6				:	
				:	69:	68	67:	66	65:	64:	63	62	61	60	59	58	57	56:	55	54	53	52	51	50:		
				:	:	:	:	:	GUN:								:								:	
				:	SP	:	IFF	INT:	IFF	TNP:	CAP:	TYPE OF STORES, 4					:	NUMBER OF STORES, 4							:	
				:	:	:	:	:	:	:	:						:								:	
				:	1	:	2	:	2	:	1	:	8					:	6							:

WORD DESCRIPTION

WORD NUMBER: J13.2C2

WORD TITLE: AIR STORES STATUS CONTINUATION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550 001		WORD FORMAT	0-	1 2	01
1551 001		CONTINUATION WORD LABEL	2-	6 5	00010
1621 001		SUMMATION INDICATOR (SUM IND)	7	1	
408 032		NUMBER OF STORES, 1	8-	13 6	
1623 001		TYPE OF STORES, 1	14-	21 8	
408 033		NUMBER OF STORES, 2	22-	27 6	SAME CODING AS FOR BITS 8-13.
1623 002		TYPE OF STORES, 2	28-	35 8	SAME CODING AS FOR BITS 14-21.
408 034		NUMBER OF STORES, 3	36-	41 6	SAME CODING AS FOR BITS 8-13.
1623 003		TYPE OF STORES, 3	42-	49 8	SAME CODING AS FOR BITS 14-21.
408 035		NUMBER OF STORES, 4	50-	55 6	SAME CODING AS FOR BITS 8-13.
1623 004		TYPE OF STORES, 4	56-	63 8	SAME CODING AS FOR BITS 14-21.
1624 001		GUN CAPABLE (GUN CAP)	64	1	
1665 003		IFF/SIF TRANSPONDER STATUS (IFF TNP)	65-	66 2	
1665 004		IFF/SIF INTERROGATOR STATUS (IFF INT)	67-	68 2	
756 001		SPARE (SP)	69	1	

FIELD CODING FOR J13.2C2

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1621	001	SUMMATION INDICATOR ----- NO STATEMENT FLIGHT SUMMATION	0 1	
408	032	NUMBER OF STORES, 1 ----- 0 THROUGH 62 UNITS NO STATEMENT	0 THROUGH 62 63	THE NUMBER OF A PARTICULAR TYPE OF STORES ON THE CONTROLLED AIRCRAFT.
1623	001	TYPE OF STORES, 1 ----- NO STATEMENT AIM-7 SPARROW AIM-9 SIDEWINDER AIM-54 PHOENIX AGM-45 SHRIKE AGM-65A MAVERICK (TV) AGM-65B MAVERICK (TV) AGM-65D MAVERICK (IR) AGM-65E MAVERICK (LASER MAW) AGM-78 AGM-88 HARM AIM-120 AMRAAM DISUSED DISUSED DISUSED BLU-27 NAPALM DISUSED MK-82 AIR MK-84 AIR CBU-24 CBU-49 DISUSED CBU-59/B ROCKEYE II DISUSED CBU-87 CEM CBU-89 GATOR CBU-90 CBU-92 CBU-93 CBU-421A CBU-81B	0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30	LISTS ALL AIR DELIVERABLE ORDNANCE BY OPERATIONS ORDER.

FIELD CODING FOR J13.2C2

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1623	001	TYPE OF STORES, 1 -----	(CONTINUED)	
		GBU-10 PAVEWAY I & II (MK-84)	31	
		GBU-12 PAVEWAY I & II (MK-82)	32	
		GBU-15(V)-4B	33	
		GBU-22B	34	
		DISUSED	35	
		DISUSED	36	
		DISUSED	37	
		DISUSED	38	
		DISUSED	39	
		DISUSED	40	
		MK-24	41	
		MK-33	42	
		MK-36 SEA MINE	43	
		MK-45	44	
		MK-77	45	
		MK-81SE	46	
		MK-82 LD	47	
		MK-82SE SNAKE EYE	48	
		MK-83 GP 1000LB	49	
		MK-84 LD 2000LB	50	
		MK-117 750LB	51	
		ROCKETS (2.75)	52	
		DISUSED	53	
		DISUSED	54	
		AGM-62 WALLEYE	55	
		AGM-62 WALLEYE I (E0) 1000LB	56	
		AGM-62 WALLEYE II (ER/ DL) (E0) 2400LB	57	
		SKY FLASH	58	
		AIM-132 ASRAAM	59	
		DISUSED	60	
		DISUSED	61	
		ASLAM	62	
		R530	63	
		DISUSED	64	
		S530 SUPER 530F	65	
		ASPID	66	
		DISUSED	67	
		SHAFRIR	68	
		DISUSED	69	

FIELD CODING FOR J13.2C2

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1623	001	TYPE OF STORES, 1	(CONTINUED)	

		DISUSED	70	
		DISUSED	71	
		AGM-12 BULLPUP	72	
		DISUSED	73	
		AGM-84 HARPOON	74	
		AGM-86C/D CALCM	75	
		MK-86 (BOMB)	76	
		CBU-BL 755	77	
		MW1-KB 44-TOR	78	
		MW1-MKSA-TOR	79	
		KORMORAN	80	
		BLU-1	81	
		CBU-2 C/A	82	
		M 116 A1/A2	83	
		DISUSED	84	
		FLARE-TP 400	85	
		FLARE-ALE 40	86	
		CHF-ALE-40/4	87	
		SEA EAGLE	88	
		R550 MAGIC I	89	
		R550 MAGIC II	90	
		MICA EM	91	
		SUPER 530D (S530D)	92	
		DISUSED	93	
		BDU-33 (PRACTICE BOMB)	94	
		BDU-48 (PRACTICE BOMB)	95	
		BDU-48 (PRACTICE MINE)	96	
		CRV-7 UNGUIDED ROCKET	97	
		MK-76	98	
		MK-106 (PRACTICE BOMB)	99	
		BL-755	100	
		CBU-78 GATOR MINE	101	
		GBU-16	102	
		GBU-24	103	
		GBU-27 (LG BLU-109)	104	
		GBU-28 (LG BLU-113)	105	
		LGTR	106	
		JSOW (TRAINING)	107	
		AGM-154 JSOW (BLU-97)	108	
		AGM-154 JSOW (BLU-108)	109	
		AGM-154 JSOW (UNITARY)	110	
		JDAM (TRAINING)	111	
		GBU-31 JDAM (BLU-109)	112	

FIELD CODING FOR J13.2C2

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1623	001	TYPE OF STORES, 1	(CONTINUED)	

		GBU-31 JDAM (MK-84)	113	
		AGM-65F MAVERICK (IR	114	
		MAW)		
		AGM-65G MAVERICK (IR	115	
		MAW)		
		AGM-84E SLAM	116	
		AGM-84H SLAM-ER	117	
		ATM-84 HARPOON	118	
		(TRAINING)		
		TALD	119	
		LUU-2	120	
		MJU-27	121	
		MJU-37	122	
		MK-58	123	
		MK-40 SEA MINE (1000LB)	124	
		MK-41 SEA MINE (2000LB)	125	
		MK-52 SEA MINE (1200LB)	126	
		MK-55 SEA MINE (2100LB)	127	
		MK-56 SEA MINE (2200LB)	128	
		DISUSED	129	
		DISUSED	130	
		MK-63	131	
		MK-64 SEA MINE	132	
		MK-65 SEA MINE	133	
		DISUSED	134	
		DISUSED	135	
		M129 2000LB LEAFLET/	136	
		CHAFF		
		AIM-9X HIGH OFF-	137	
		BORESIGHT		
		IRIS-T (AIM SHORT RANGE)	138	
		BDU-50 (PRACTICE BOMB)	139	
		BLU-109 2000LB	140	
		PENETRATOR		
		MATRA-250 AG	141	
		MC-1 AG	142	
		AGM-130 POWERED STANDOFF	143	
		WEAPON		
		AGM-142 HAVE NAP	144	
		AGM-158 JASSM	145	
		CBU-103 WCMD-CEM	146	
		CBU-104 WCMD-GATOR	147	
		CBU-105 WCMD-SFW	148	

FIELD CODING FOR J13.2C2 (SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1623	001	TYPE OF STORES, 1 -----	(CONTINUED)	
		GBU-37 GAM 5000LB	149	
		MICA IR	150	
		AS30 LASER	151	
		GBU-XX PAVEWAY II	152	
		(MK-81)		
		KORMORAN II	153	
		CBU-97 SFW	154	
		EGBU-27	155	
		EGBU-28	156	
		UNDEFINED	157 THROUGH 255	
1624	001	GUN CAPABLE -----		INDICATES THE CAPABILITY OF AN AIR- BORNE WEAPON SYSTEM TO USE ITS CANNON FOR COMBAT PURPOSES.
		NO STATEMENT	0	
		GUN CAPABLE	1	AT LEAST ONE PASS AVAILABLE.
1665	003	IFF/SIF TRANSPONDER STATUS -----		DESCRIBES THE OPERATING STATUS OF AN IFF/SIF TRANSPONDER.
		NO STATEMENT	0	
		SYSTEM OPERATIONAL	1	
		SYSTEM NON-OPERATIONAL	2	
		SYSTEM OFF	3	
1665	004	IFF/SIF INTERROGATOR STATUS -----		DESCRIBES THE OPERATING STATUS OF AN IFF/SIF INTERROGATOR.
		NO STATEMENT	0	
		SYSTEM OPERATIONAL	1	
		SYSTEM NON-OPERATIONAL	2	
		SYSTEM OFF	3	

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD TITLE: AIR ASW STATUS CONTINUATION WORD

	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00	
	NPS		NAS		NR		NSM		NCM		NST		NCT		NSD		NCD		CONTINUATION WORD LABEL					WORD FORMAT		
	2		2		2		2		2		2		2		2		2		5						2	

[illegible][illegible]

WORD DESCRIPTION

WORD NUMBER: J13.2C3

WORD TITLE: AIR ASW STATUS CONTINUATION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550 001		WORD FORMAT	0-	1 2	01
1551 001		CONTINUATION WORD LABEL	2-	6 5	00011
408 005		CONVENTIONAL DEPTH BOMB INVENTORY (NCD)	7-	8 2	
408 006		SPECIAL DEPTH BOMB INVENTORY (NSD)	9-	10 2	
408 007		CONVENTIONAL TORPEDO INVENTORY (NCT)	11-	12 2	
408 008		SPECIAL TORPEDO INVENTORY (NST)	13-	14 2	
408 009		CONVENTIONAL MISSILE INVENTORY (NCM)	15-	16 2	
408 010		SPECIAL MISSILE INVENTORY (NSM)	17-	18 2	
408 011		ROCKET INVENTORY (NR)	19-	20 2	
408 012		ACTIVE SONOBUOY INVENTORY (NAS)	21-	22 2	
408 013		PASSIVE SONOBUOY INVENTORY (NPS)	23-	24 2	
756 001		SPARE (SP)	25	1	
1664 001		RADAR STATUS INDICATOR (RDR STS)	26	1	
1664 002		ELECTRONIC WARFARE SUPPORT, STATUS (ES STS)	27	1	SAME CODING AS FOR BIT 26.
1664 003		INFRARED STATUS INDICATOR (IR STS)	28	1	SAME CODING AS FOR BIT 26.
1664 004		LOW FREQUENCY ANALYSIS AND RECORDING STATUS (LOF)	29	1	SAME CODING AS FOR BIT 26.
1664 005		MAGNETIC ANOMALY DETECTOR STATUS (MAD)	30	1	SAME CODING AS FOR BIT 26.
1664 006		SEARCH LIGHT STATUS (SCH LGT)	31	1	SAME CODING AS FOR BIT 26.
1664 007		LOW LIGHT LEVEL TELEVISION STATUS (LTV)	32	1	SAME CODING AS FOR BIT 26.
1664 008		DIFAR/CODAR STATUS (DIF COD)	33	1	SAME CODING AS FOR BIT 26.
1664 009		ACTIVE SONOBUOY STATUS (ACT SON)	34	1	SAME CODING AS FOR BIT 26.
1664 010		RECORDER STATUS, 1 (REC 1)	35	1	SAME CODING AS FOR BIT 26.
1664 011		RECORDER STATUS, 2 (REC 2)	36	1	SAME CODING AS FOR BIT 26.
1664 012		RECORDER STATUS, 3 (REC 3)	37	1	SAME CODING AS FOR BIT 26.
1664 013		RECORDER STATUS, 4 (REC 4)	38	1	SAME CODING AS FOR BIT 26.
1664 014		SONAR STATUS (SON)	39	1	SAME CODING AS FOR BIT 26.

WORD DESCRIPTION

WORD NUMBER: J13.2C3
WORD TITLE: AIR ASW STATUS CONTINUATION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT		#	RESOLUTION, CODING, ETC
			POSITION	BITS		
1664	015	SPECIAL SONOBUOY STATUS, 1 (SS 1)	40		1	SAME CODING AS FOR BIT 26.
1664	016	SPECIAL SONOBUOY STATUS, 2 (SS 2)	41		1	SAME CODING AS FOR BIT 26.
1664	017	SPECIAL PROCESSOR STATUS, 1 (SP 1)	42		1	SAME CODING AS FOR BIT 26.
1664	018	SPECIAL PROCESSOR STATUS, 2 (SP 2)	43		1	SAME CODING AS FOR BIT 26.
365	037	RADAR WATCH ALTITUDE	44 -	52	9	
756	017	SPARE	53 -	69	17	

FIELD CODING FOR J13.2C3

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
408	005	CONVENTIONAL DEPTH BOMB INVENTORY -----		AN ESTIMATED AMOUNT OF CONVENTIONAL DEPTH BOMBS REMAINING ON AN AIRCRAFT OR WEAPON SYSTEM.
		NO STATEMENT	0	
		ZERO USEABLE	1	
		ONE USEABLE	2	
		TWO OR MORE USEABLE	3	
408	006	SPECIAL DEPTH BOMB INVENTORY -----		AN ESTIMATED AMOUNT OF SPECIAL DEPTH BOMBS REMAINING ON AN AIRCRAFT OR WEAPONS SYSTEMS.
		NO STATEMENT	0	
		ZERO USEABLE	1	
		ONE USEABLE	2	
		TWO OR MORE USEABLE	3	
408	007	CONVENTIONAL TORPEDO INVENTORY -----		AN ESTIMATED AMOUNT OF CONVENTIONAL TORPEDOES REMAINING ON A WEAPON SYSTEM.
		NO STATEMENT	0	
		ZERO USEABLE	1	
		ONE USEABLE	2	
		TWO OR MORE USEABLE	3	
408	008	SPECIAL TORPEDO INVENTORY -----		AN ESTIMATED AMOUNT OF SPECIAL TORPEDOES REMAINING ON A WEAPON SYSTEM.
		NO STATEMENT	0	
		ZERO USEABLE	1	
		ONE USEABLE	2	
		TWO OR MORE USEABLE	3	
408	009	CONVENTIONAL MISSILE INVENTORY -----		AN ESTIMATED AMOUNT OF CONVENTIONAL MISSILES REMAINING ON A WEAPON SYSTEM.
		NO STATEMENT	0	
		ZERO USEABLE	1	
		ONE USEABLE	2	
		TWO OR MORE USEABLE	3	
408	010	SPECIAL MISSILE INVENTORY -----		AN ESTIMATED AMOUNT OF SPECIAL MISSILES REMAINING ON A WEAPON SYSTEM.
		NO STATEMENT	0	
		ZERO USEABLE	1	

FIELD CODING FOR J13.2C3

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
408	010	SPECIAL MISSILE INVENTORY -----	(CONTINUED)	
		ONE USEABLE	2	
		TWO OR MORE USEABLE	3	
408	011	ROCKET INVENTORY -----		AN ESTIMATED AMOUNT OF ROCKETS REMAINING ON A WEAPON SYSTEM.
		NO STATEMENT	0	
		ZERO USEABLE	1	
		ONE THROUGH EIGHT USEABLE	2	
		NINE OR MORE USEABLE.	3	
408	012	ACTIVE SONOBUOY INVENTORY -----		AN ESTIMATED AMOUNT OF ACTIVE SONOBUOYS REMAINING ON A WEAPON SYSTEM.
		NO STATEMENT	0	
		ZERO USEABLE	1	
		ONE THROUGH FOUR USEABLE	2	
		FIVE OR MORE USEABLE	3	
408	013	PASSIVE SONOBUOY INVENTORY -----		AN ESTIMATED AMOUNT OF PASSIVE SONOBUOYS REMAINING ON A WEAPON SYSTEM.
		NO STATEMENT	0	
		ZERO USEABLE	1	
		ONE THROUGH EIGHT USEABLE	2	
		NINE OR MORE USEABLE.	3	
1664	001	RADAR STATUS INDICATOR -----		
		NO STATEMENT	0	
		EQUIPMENT IS OPERATIONAL	1	
365	037	RADAR WATCH ALTITUDE -----		EXPRESSES THE BEST ALTITUDE FOR RADAR WATCH AS MEASURED OUTWARD FROM THE EARTH AS A POSITIVE QUANTITY ABOVE MEAN SEA LEVEL (MSL) IN FEET. IN 100 FOOT INCREMENTS.
		0 THROUGH 50,900 FEET	0 THROUGH 509	
		GREATER THAN 50,900 FEET	510	
		NO STATEMENT	511	

5.3-88

MIL-STD-6016B

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: AIR ELECTRONIC WARFARE STATUS CONTINUATION WORD

:	24	:	23	:	22	:	21	:	20	:	19	:	18	:	17	:	16	:	15	:	14	:	13	:	12	:	11	:	10	:	09	:	08	:	07	:	06	:	05	:	04	:	03	:	02	:	01	:	00	:
:	ES I	:	ES H	:	ES G	:	ES F	:	ES E	:	ES D	:	ES C	:	ES B	:	ES A	:	CONTINUATION WORD LABEL										:	WORD	:	FORMAT	:																	
:	2	:	2	:	2	:	2	:	2	:	2	:	2	:	2	:	2	:	5										:	2	:																			

[illegible][illegible]

WORD DESCRIPTION

WORD NUMBER: J13.2C4

WORD TITLE: AIR ELECTRONIC WARFARE STATUS CONTINUATION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	01
1551	001	CONTINUATION WORD LABEL	2-	6 5	00100
268	001	ES FREQUENCY BAND A (ES A)	7-	8 2	
268	002	ES FREQUENCY BAND B (ES B)	9-	10 2	
268	003	ES FREQUENCY BAND C (ES C)	11-	12 2	
268	004	ES FREQUENCY BAND D (ES D)	13-	14 2	
268	005	ES FREQUENCY BAND E (ES E)	15-	16 2	
268	006	ES FREQUENCY BAND F (ES F)	17-	18 2	
268	007	ES FREQUENCY BAND G (ES G)	19-	20 2	
268	008	ES FREQUENCY BAND H (ES H)	21-	22 2	
268	009	ES FREQUENCY BAND I (ES I)	23-	24 2	
268	010	ES FREQUENCY BAND J (ES J)	25-	26 2	
268	011	ES FREQUENCY BAND K (ES K)	27-	28 2	
268	012	ES FREQUENCY BAND L (ES L)	29-	30 2	
268	013	ES FREQUENCY BAND M (ES M)	31-	32 2	
268	014	HF DIRECTION FINDER (HF DF)	33-	34 2	
268	015	VHF DIRECTION FINDER (VHF DF)	35-	36 2	
268	016	UHF DIRECTION FINDER (UHF DF)	37-	38 2	
272	001	EA FREQUENCY BAND A (EA A)	39-	40 2	
272	002	EA FREQUENCY BAND B (EA B)	41-	42 2	
272	003	EA FREQUENCY BAND C (EA C)	43-	44 2	
272	004	EA FREQUENCY BAND D (EA D)	45-	46 2	
272	005	EA FREQUENCY BAND E (EA E)	47-	48 2	
272	006	EA FREQUENCY BAND F (EA F)	49-	50 2	
272	007	EA FREQUENCY BAND G (EA G)	51-	52 2	
272	008	EA FREQUENCY BAND H (EA H)	53-	54 2	
272	009	EA FREQUENCY BAND I (EA I)	55-	56 2	
272	010	EA FREQUENCY BAND J (EA J)	57-	58 2	
272	011	EA FREQUENCY BAND K (EA K)	59-	60 2	
272	012	EA FREQUENCY BAND L (EA L)	61-	62 2	
272	013	EA FREQUENCY BAND M (EA M)	63-	64 2	
272	014	DECOY, CHAFF	65-	66 2	
272	015	DECOY, IR	67-	68 2	
756	001	SPARE (SP)	69	1	

FIELD CODING FOR J13.2C4

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
268	001	ES FREQUENCY BAND A -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 0 THROUGH 250 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	002	ES FREQUENCY BAND B -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 250 THROUGH 500 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	003	ES FREQUENCY BAND C -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 500 THROUGH 1000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	004	ES FREQUENCY BAND D -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 1000 THROUGH 2000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	005	ES FREQUENCY BAND E -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 2000 THROUGH 3000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).

5.3-92

MIL-STD-6016B

FIELD CODING FOR J13.2C4

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
268	006	ES FREQUENCY BAND F -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 3000 THROUGH 4000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	007	ES FREQUENCY BAND G -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 4000 THROUGH 6000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	008	ES FREQUENCY BAND H -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 6000 THROUGH 8000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	009	ES FREQUENCY BAND I -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 8000 THROUGH 10,000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	010	ES FREQUENCY BAND J -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 10,000 THROUGH 20,000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).

FIELD CODING FOR J13.2C4

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
268	011	ES FREQUENCY BAND K -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 20,000 THROUGH 40,000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	012	ES FREQUENCY BAND L -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 40,000 THROUGH 60,000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	013	ES FREQUENCY BAND M -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 60,000 THROUGH 100,000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	014	HF DIRECTION FINDER -----		INDICATES THE STATUS OF DIRECTION FINDER EQUIPMENT IN THE HF RANGE.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	015	VHF DIRECTION FINDER -----		INDICATES THE STATUS OF DIRECTION FINDER EQUIPMENT IN THE VHF RANGE.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	016	UHF DIRECTION FINDER -----		INDICATES THE STATUS OF DIRECTION FINDER EQUIPMENT IN THE UHF RANGE.

FIELD CODING FOR J13.2C4

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
268	016	UHF DIRECTION FINDER -----	(CONTINUED)	
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
272	001	EA FREQUENCY BAND A -----		INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 0 THROUGH 250 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
272	002	EA FREQUENCY BAND B -----		INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 250 THROUGH 500 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
272	003	EA FREQUENCY BAND C -----		INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 500 THROUGH 1000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
272	004	EA FREQUENCY BAND D -----		INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 1000 THROUGH 2000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).

5.3-95

MIL-STD-6016B

FIELD CODING FOR J13.2C4

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
272	005	EA FREQUENCY BAND E -----		INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 2000 THROUGH 3000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
272	006	EA FREQUENCY BAND F -----		INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 3000 THROUGH 4000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
272	007	EA FREQUENCY BAND G -----		INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 4000 THROUGH 6000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
272	008	EA FREQUENCY BAND H -----		INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 6000 THROUGH 8000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
272	009	EA FREQUENCY BAND I -----		INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 8000 THROUGH 10,000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).

FIELD CODING FOR J13.2C4

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
272	010	EA FREQUENCY BAND J -----		INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 10,000 THROUGH 20,000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
272	011	EA FREQUENCY BAND K -----		INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 20,000 THROUGH 40,000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
272	012	EA FREQUENCY BAND L -----		INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 40,000 THROUGH 60,000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
272	013	EA FREQUENCY BAND M -----		INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 60,000 THROUGH 100,000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
272	014	DECOY, CHAFF -----		INDICATES THE STATUS OF THE DECOY CHAFF.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).

FIELD CODING FOR J13.2C4 (SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
272	015	DECOY, IR		INDICATES THE STATUS OF THE INFRARED
		-----		DECOY.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW
				POWER OUT, LOW SENSITIVITY).

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: EQUIPMENT STATUS

24	23	22:	21	20	19:	18	17:	16	15:	14	13	12:	11	10	09:	08	07:	06	05	04	03	02:	01	00:								
CONTROL POSITIONS, 1		:	COM IMP		:	LINK 4 STATUS		:	IJMS STATUS		:	LINK 16 STATUS		:	LINK 11 STATUS		:	LINK 14 STATUS		:	CONTINUATION WORD LABEL			:	WORD FORMAT							
4		:	3		:	2		:	2		:	3		:	3		:	2		:	5			:	2							
49	48	47	46	45	44	43	42	41	40	39	38	37	36	35:	34	33	32	31	30:	29	28	27:	26	25								
<---															:	CONSOLE STATUS					:	COMPUTER STATUS					:	M4 INT		:	---	
															:	5					:	3					:	1		:		
					:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50							
					:	SPARE																										
					:	35																										

WORD DESCRIPTION

WORD NUMBER: J13.2C5
WORD TITLE: EQUIPMENT STATUS

REFERENCE		BIT #	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0- 1 2	01
1551 001	CONTINUATION WORD LABEL	2- 6 5	00101
1625 002	LINK 14 STATUS (L14 STS)	7- 8 2	
1625 003	LINK 11 STATUS	9- 11 3	
1625 005	LINK 16 STATUS	12- 14 3	
1625 007	IJMS STATUS (IJMS STS)	15- 16 2	
1625 008	LINK 4 STATUS (L4 STS)	17- 18 2	
1652 001	COMMUNICATIONS IMPAIRMENT (COM IMP)	19- 21 3	
1678 002	CONTROL POSITIONS, 1	22- 25 4	
1665 015	MODE IV INTERROGATOR STATUS (M4 INT)	26 1	
1665 044	COMPUTER STATUS	27- 29 3	
1678 003	CONSOLE STATUS	30- 34 5	
756 035	SPARE	35- 69 35	

FIELD CODING FOR J13.2C5

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1625	002	LINK 14 STATUS -----		INDICATES THE AVAILABILITY OF LINK 14.
		NO STATEMENT	0	
		NOT AVAILABLE	1	
		DEGRADED	2	
		AVAILABLE	3	
1625	003	LINK 11 STATUS -----		INDICATES THE AVAILABILITY OF LINK 11.
		NO STATEMENT	0	
		AVAILABLE VIA LOCAL BUFFER	1	
		AVAILABLE VIA REMOTE BUFFER	2	
		AVAILABLE VIA LOCAL AND REMOTE BUFFER	3	
		DEGRADED	4	
		NOT AVAILABLE	5	
		UNDEFINED	6 THROUGH 7	
1625	005	LINK 16 STATUS -----		INDICATES THE AVAILABILITY OF LINK 16.
		NO STATEMENT	0	
		AVAILABLE VIA LOCAL BUFFER	1	
		AVAILABLE VIA REMOTE BUFFER	2	
		AVAILABLE VIA LOCAL AND REMOTE BUFFER	3	
		DEGRADED	4	
		NOT AVAILABLE	5	
		UNDEFINED	6 THROUGH 7	
1625	007	IJMS STATUS -----		INDICATES THE AVAILABILITY OF IJMS.
		NO STATEMENT	0	
		NOT AVAILABLE	1	
		DEGRADED	2	
		AVAILABLE	3	
1625	008	LINK 4 STATUS -----		INDICATES THE AVAILABILITY OF LINK 4.
		NO STATEMENT	0	
		NOT AVAILABLE	1	
		AVAILABLE	2	

FIELD CODING FOR J13.2C5

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1625	008	LINK 4 STATUS ----- UNDEFINED	(CONTINUED) 3	
1652	001	COMMUNICATIONS IMPAIRMENT ----- NO STATEMENT UHF-AM VHF-AM VHF-FM HF-SSB UPPER HF UHF-FM HF-SSB LOWER	 0 1 2 3 4 5 6 7	DEFINES THE COMMUNICATIONS COMPONENT THAT IS CAUSING THE PLATFORM TO BE LESS THAN FULLY OPERATIONAL.
1678	002	CONTROL POSITIONS, 1 ----- 0 THROUGH 13 POSITIONS GREATER THAN 13 POSITIONS NO STATEMENT	 0 THROUGH 13 14 15	INDICATES THE NUMBER OF CONTROL POSITIONS AVAILABLE.
1665	015	MODE IV INTERROGATOR STATUS ----- NO STATEMENT SYSTEM OPERATIONAL	 0 1	DESCRIBES THE OPERATING STATUS OF A MODE IV INTERROGATOR SYSTEM.
1665	044	COMPUTER STATUS ----- NO STATEMENT SYSTEM OFF SYSTEM NONOPERATIONAL ONE CPU OPERATIONAL HALF MEMORY AVAILABLE SYSTEM OPERATIONAL UNDEFINED	 0 1 2 3 4 5 6 THROUGH 7	DESCRIBES THE OPERATING STATUS OF THE COMPUTER SYSTEM. THIS DI IS REMOTELY INPUT. THIS DI IS REMOTELY INPUT.
1678	003	CONSOLE STATUS ----- 0 THROUGH 29 CONSOLES GREATER THAN 29 CONSOLES NO STATEMENT	 0 THROUGH 29 30 31	INDICATES THE NUMBER OF OPERATIONAL CONSOLES.

WORD TITLE: AIR CONTROL STATUS CONTINUATION WORD

24	23	22	21	20:	19	18	17	16	15	14	13:	12	11:	10	09:	08	07:	06	05	04	03	02:	01	00								
VOICE GROUP B CHANNEL				:	VOICE GROUP A CHANNEL							:	4C STS			:	CCN STS			:	JCN STS			:	CONTINUATION WORD LABEL				:	WORD FORMAT		:
7				:	7							:	2		:	2		:	2		:	5				:	2		:			

:	49	48	47:	46	45	44:	43	42:	41	40	39:	38	37:	36	35:	34	33:	32	31:	30	29:	28	27:	26	25
:	DEFENSIVE JAMMER SYSTEM 1 STATUS			DEFENSIVE JAMMER SYSTEM 1 TYPE			RSS	RECCE SYSTEM TYPE			GPSS	LSTSS	TPSS	MWSS	D EA		VMF STATUS		--->						
:	3			3			2	3			2	2	2	2	2		2								

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56:	55	54	53:	52	51	50:	
:															:	DEFENSIVE		:	DEFENSIVE		:
:	SPARE														:	JAMMER		:	JAMMER		:
:															:	SYSTEM 2		:	SYSTEM 2		:
:															:	STATUS		:	TYPE		:
:	14														:	3		:	3		:

WORD DESCRIPTION

WORD NUMBER: J13.2C6

WORD TITLE: AIR CONTROL STATUS CONTINUATION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	01
1551	001	CONTINUATION WORD LABEL	2-	6 5	00110
1625	009	LINK 16 CONTROL STATUS (JCN STS)	7-	8 2	
1625	010	LINK 4A CONTROL STATUS (CCN STS)	9-	10 2	
1625	011	LINK 4C STATUS (4C STS)	11-	12 2	
417	002	VOICE GROUP A CHANNEL	13-	19 7	
417	003	VOICE GROUP B CHANNEL	20-	26 7	
1625	014	VMF STATUS (VMF STS)	27-	28 2	
272	016	DECOY EA STATUS (D EA)	29-	30 2	
1665	045	MISSILE WARNING SYSTEM STATUS (MWSS)	31-	32 2	
1665	046	TELEMETRY POD SUBSYSTEM STATUS (TPSS)	33-	34 2	
1665	047	LASER SPOT TRACKER SUBSYSTEM STATUS (LSTSS)	35-	36 2	
1665	048	GLOBAL POSITIONING SUBSYSTEM STATUS (GPSS)	37-	38 2	
1934	001	RECCE SYSTEM TYPE	39-	41 3	
1665	049	RECCE SYSTEM STATUS (RSS)	42-	43 2	
1934	002	DEFENSIVE JAMMER SYSTEM 1 TYPE	44-	46 3	
1665	050	DEFENSIVE JAMMER SYSTEM 1 STATUS	47-	49 3	
1934	003	DEFENSIVE JAMMER SYSTEM 2 TYPE	50-	52 3	
1665	051	DEFENSIVE JAMMER SYSTEM 2 STATUS	53-	55 3	
756	014	SPARE	56-	69 14	

FIELD CODING FOR J13.2C6 (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1625	009	LINK 16 CONTROL STATUS -----		INDICATES WHETHER THE REFERENCE TN IS BEING CONTROLLED VIA LINK 16.
		NO STATEMENT	0	
		UNDER CONTROL	1	
		NOT UNDER CONTROL	2	
		UNDEFINED	3	
1625	010	LINK 4A CONTROL STATUS -----		INDICATES WHETHER THE REFERENCE TN IS BEING CONTROLLED VIA LINK 4A.
		NO STATEMENT	0	
		UNDER CONTROL	1	
		NOT UNDER CONTROL	2	
		UNDEFINED	3	
1625	011	LINK 4C STATUS -----		INDICATES WHETHER THE REFERENCE TN IS OPERATING ON LINK 4C (FIGHTER-TO-FIGHTER LINK 4A).
		NO STATEMENT	0	
		ACTIVE	1	
		INACTIVE	2	
		UNDEFINED	3	
417	002	VOICE GROUP A CHANNEL -----		INDICATES THE JTIDS/MIDS VOICE GROUP A CHANNEL ON WHICH THE REFERENCE TN IS ASSIGNED TO OPERATE. 128 CHANNELS FROM 0-127.
		NUMERIC	0 THROUGH 127	
417	003	VOICE GROUP B CHANNEL -----		INDICATES THE JTIDS/MIDS VOICE GROUP B CHANNEL ON WHICH THE REFERENCE TN IS ASSIGNED TO OPERATE. 128 CHANNELS FROM 0-127.
		NUMERIC	0 THROUGH 127	
1625	014	VMF STATUS -----		INDICATES THE AVAILABILITY OF VMF.
		NO STATEMENT	0	
		NOT AVAILABLE	1	
		DEGRADED	2	
		AVAILABLE	3	
272	016	DECOY EA STATUS -----		INDICATES THE STATUS OF THE DECOY EA SUBSYSTEM. NO CAPABILITY. MISSION CAPABLE.
		NO STATEMENT	0	
		STATUS UP	1	

FIELD CODING FOR J13.2C6

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
272	016	DECOY EA STATUS -----	(CONTINUED)	
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
1665	045	MISSILE WARNING SYSTEM STATUS -----		INDICATES STATUS OF THE MISSILE WARNING SYSTEM.
		NO STATEMENT	0	
		SYSTEM OPERATIONAL	1	
		SYSTEM NON-OPERATIONAL	2	
		SYSTEM OFF	3	
1665	046	TELEMETRY POD SUBSYSTEM STATUS -----		INDICATES THE STATUS OF THE TELEMETRY POD SUBSYSTEM.
		NO STATEMENT	0	
		SYSTEM OPERATIONAL	1	
		SYSTEM NON-OPERATIONAL	2	
		SYSTEM OFF	3	
1665	047	LASER SPOT TRACKER SUBSYSTEM STATUS -----		INDICATES THE STATUS OF THE LASER SPOT TRACKER SUBSYSTEM.
		NO STATEMENT	0	
		SYSTEM OPERATIONAL	1	
		SYSTEM NON-OPERATIONAL	2	
		SYSTEM OFF	3	
1665	048	GLOBAL POSITIONING SUBSYSTEM STATUS -----		INDICATES THE STATUS OF THE GLOBAL POSITIONING SUBSYSTEM.
		NO STATEMENT	0	
		UP	1	
		DOWN	2	
		DEGRADED	3	
1934	001	RECCE SYSTEM TYPE -----		INDICATES TYPE OF RECONNAISSANCE SYSTEM.
		NO STATEMENT	0	
		ELECTRO-OPTICAL	1	
		IR/EO	2	
		RF PASSIVE	3	
		SAR	4	
		ISAR	5	
		UNDEFINED	6 THROUGH 7	

FIELD CODING FOR J13.2C6

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1665	049	RECCE SYSTEM STATUS -----		INDICATES THE STATUS OF THE RECONNAISSANCE SUBSYSTEM.
		NO STATEMENT	0	
		DEGRADED	1	PARTIALLY OPERATIONAL.
		NOT OPERATIONAL	2	
		OPERATIONAL	3	
1934	002	DEFENSIVE JAMMER SYSTEM 1 TYPE -----		INDICATES TYPE OF DEFENSIVE JAMMER 1.
		NO STATEMENT	0	
		INTERNAL RF	1	
		EXTERNAL RF	2	
		UNDEFINED	3 THROUGH 7	
1665	050	DEFENSIVE JAMMER SYSTEM 1 STATUS -----		INDICATES THE STATUS OF DEFENSIVE JAMMER 1.
		NO STATEMENT	0	
		TRANSMIT	1	
		RECEIVE	2	
		STANDBY	3	
		DEGRADE	4	
		OFF	5	
		UNDEFINED	6 THROUGH 7	
1934	003	DEFENSIVE JAMMER SYSTEM 2 TYPE -----		INDICATES TYPE OF DEFENSIVE JAMMER 2.
		NO STATEMENT	0	
		INTERNAL RF	1	
		EXTERNAL RF	2	
		UNDEFINED	3 THROUGH 7	
1665	051	DEFENSIVE JAMMER SYSTEM 2 STATUS -----		INDICATES THE STATUS OF DEFENSIVE JAMMER 2.
		NO STATEMENT	0	
		TRANSMIT	1	
		RECEIVE	2	
		STANDBY	3	
		DEGRADE	4	
		OFF	5	
		UNDEFINED	6 THROUGH 7	

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J13.2C7

WORD TITLE: ADDITIONAL AIR STORES STATUS CONTINUATION WORD

24	23	22:	21	20	19	18	17	16	15	14:	13	12	11	10	09	08:	07:	06	05	04	03	02:	01	00:																		
<---		:	TYPE OF STORES, 5								:	NUMBER OF STORES, 5					:	SUM:	CONTINUATION WORD				:	WORD	:																	
		:									:						:	IND:	LABEL				:	FORMAT	:																	
		:	8								:	6					:	1	:	5				:	2	:																
:	49	48	47	46	45	44	43	42:	41	40	39	38	37	36:	35	34	33	32	31	30	29	28:	27	26	25																	
:	TYPE OF STORES, 7								:	NUMBER OF STORES, 7					:	TYPE OF STORES, 6				:	NUMBER OF				:																	
:									:						:					:	STORES, 6				:																	
:	8								:	6					:	8				:	6				:																	
																						:	69	68	67	66	65	64:	63	62	61	60	59	58	57	56:	55	54	53	52	51	50:
																						:	SPARE								:	TYPE OF STORES, 8					:	NUMBER OF STORES, 8				:
																						:									:						:					:
																						:	6								:	8					:	6				:

WORD DESCRIPTION

WORD NUMBER: J13.2C7

WORD TITLE: ADDITIONAL AIR STORES STATUS CONTINUATION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550 001		WORD FORMAT	0-	1 2	01
1551 001		CONTINUATION WORD LABEL	2-	6 5	00111
1621 001		SUMMATION INDICATOR (SUM IND)	7	1	
408 040		NUMBER OF STORES, 5	8-	13 6	
1623 006		TYPE OF STORES, 5	14-	21 8	
408 041		NUMBER OF STORES, 6	22-	27 6	SAME CODING AS FOR BITS 8-13.
1623 007		TYPE OF STORES, 6	28-	35 8	SAME CODING AS FOR BITS 14-21.
408 042		NUMBER OF STORES, 7	36-	41 6	SAME CODING AS FOR BITS 8-13.
1623 008		TYPE OF STORES, 7	42-	49 8	SAME CODING AS FOR BITS 14-21.
408 043		NUMBER OF STORES, 8	50-	55 6	SAME CODING AS FOR BITS 8-13.
1623 009		TYPE OF STORES, 8	56-	63 8	SAME CODING AS FOR BITS 14-21.
756 006		SPARE	64-	69 6	

FIELD CODING FOR J13.2C7

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1621	001	SUMMATION INDICATOR ----- NO STATEMENT FLIGHT SUMMATION	0 1	
408	040	NUMBER OF STORES, 5 ----- 0 THROUGH 62 UNITS NO STATEMENT	0 THROUGH 62 63	THE NUMBER OF A PARTICULAR TYPE OF STORES ON THE CONTROLLED AIRCRAFT.
1623	006	TYPE OF STORES, 5 ----- NO STATEMENT AIM-7 SPARROW AIM-9 SIDEWINDER AIM-54 PHOENIX AGM-45 SHRIKE AGM-65A MAVERICK (TV) AGM-65B MAVERICK (TV) AGM-65D MAVERICK (IR) AGM-65E MAVERICK (LASER MAW) AGM-78 AGM-88 HARM AIM-120 AMRAAM DISUSED DISUSED DISUSED BLU-27 NAPALM DISUSED MK-82 AIR MK-84 AIR CBU-24 CBU-49 DISUSED CBU-59/B ROCKEYE II DISUSED CBU-87 CEM CBU-89 GATOR CBU-90 CBU-92 CBU-93 CBU-421A CBU-81B	0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30	LISTS ALL AIR DELIVERABLE ORDNANCE BY OPERATIONS ORDER.

FIELD CODING FOR J13.2C7

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1623	006	TYPE OF STORES, 5	(CONTINUED)	

		GBU-10 PAVEWAY I & II	31	
		(MK-84)		
		GBU-12 PAVEWAY I & II	32	
		(MK-82)		
		GBU-15(V)-4B	33	
		GBU-22B	34	
		DISUSED	35	
		DISUSED	36	
		DISUSED	37	
		DISUSED	38	
		DISUSED	39	
		DISUSED	40	
		MK-24	41	
		MK-33	42	
		MK-36 SEA MINE	43	
		MK-45	44	
		MK-77	45	
		MK-81SE	46	
		MK-82 LD	47	
		MK-82SE SNAKE EYE	48	
		MK-83 GP 1000LB	49	
		MK-84 LD 2000LB	50	
		MK-117 750LB	51	
		ROCKETS (2.75)	52	
		DISUSED	53	
		DISUSED	54	
		AGM-62 WALLEYE	55	
		AGM-62 WALLEYE I (E0)	56	
		1000LB		
		AGM-62 WALLEYE II (ER/	57	
		DL) (E0) 2400LB		
		SKY FLASH	58	
		AIM-132 ASRAAM	59	
		DISUSED	60	
		DISUSED	61	
		ASLAM	62	
		R530	63	
		DISUSED	64	
		S530 SUPER 530F	65	
		ASPID	66	
		DISUSED	67	
		SHAFRIR	68	
		DISUSED	69	

FIELD CODING FOR J13.2C7

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1623	006	TYPE OF STORES, 5	(CONTINUED)	

		DISUSED	70	
		DISUSED	71	
		AGM-12 BULLPUP	72	
		DISUSED	73	
		AGM-84 HARPOON	74	
		AGM-86C/D CALCM	75	
		MK-86 (BOMB)	76	
		CBU-BL 755	77	
		MW1-KB 44-TOR	78	
		MW1-MKSA-TOR	79	
		KORMORAN	80	
		BLU-1	81	
		CBU-2 C/A	82	
		M 116 A1/A2	83	
		DISUSED	84	
		FLARE-TP 400	85	
		FLARE-ALE 40	86	
		CHF-ALE-40/4	87	
		SEA EAGLE	88	
		R550 MAGIC I	89	
		R550 MAGIC II	90	
		MICA EM	91	
		SUPER 530D (S530D)	92	
		DISUSED	93	
		BDU-33 (PRACTICE BOMB)	94	
		BDU-48 (PRACTICE BOMB)	95	
		BDU-48 (PRACTICE MINE)	96	
		CRV-7 UNGUIDED ROCKET	97	
		MK-76	98	
		MK-106 (PRACTICE BOMB)	99	
		BL-755	100	
		CBU-78 GATOR MINE	101	
		GBU-16	102	
		GBU-24	103	
		GBU-27 (LG BLU-109)	104	
		GBU-28 (LG BLU-113)	105	
		LGTR	106	
		JSOW (TRAINING)	107	
		AGM-154 JSOW (BLU-97)	108	
		AGM-154 JSOW (BLU-108)	109	
		AGM-154 JSOW (UNITARY)	110	
		JDAM (TRAINING)	111	
		GBU-31 JDAM (BLU-109)	112	

FIELD CODING FOR J13.2C7

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1623	006	TYPE OF STORES, 5	(CONTINUED)	

		GBU-31 JDAM (MK-84)	113	
		AGM-65F MAVERICK (IR	114	
		MAW)		
		AGM-65G MAVERICK (IR	115	
		MAW)		
		AGM-84E SLAM	116	
		AGM-84H SLAM-ER	117	
		ATM-84 HARPOON	118	
		(TRAINING)		
		TALD	119	
		LUU-2	120	
		MJU-27	121	
		MJU-37	122	
		MK-58	123	
		MK-40 SEA MINE (1000LB)	124	
		MK-41 SEA MINE (2000LB)	125	
		MK-52 SEA MINE (1200LB)	126	
		MK-55 SEA MINE (2100LB)	127	
		MK-56 SEA MINE (2200LB)	128	
		DISUSED	129	
		DISUSED	130	
		MK-63	131	
		MK-64 SEA MINE	132	
		MK-65 SEA MINE	133	
		DISUSED	134	
		DISUSED	135	
		M129 2000LB LEAFLET/	136	
		CHAFF		
		AIM-9X HIGH OFF-	137	
		BORESIGHT		
		IRIS-T (AIM SHORT RANGE)	138	
		BDU-50 (PRACTICE BOMB)	139	
		BLU-109 2000LB	140	
		PENETRATOR		
		MATRA-250 AG	141	
		MC-1 AG	142	
		AGM-130 POWERED STANDOFF	143	
		WEAPON		
		AGM-142 HAVE NAP	144	
		AGM-158 JASSM	145	
		CBU-103 WCMD-CEM	146	
		CBU-104 WCMD-GATOR	147	
		CBU-105 WCMD-SFW	148	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1623	006	TYPE OF STORES, 5	(CONTINUED)	

		GBU-37 GAM 5000LB	149	
		MICA IR	150	
		AS30 LASER	151	
		GBU-XX PAVEWAY II	152	
		(MK-81)		
		KORMORAN II	153	
		CBU-97 SFW	154	
		EGBU-27	155	
		EGBU-28	156	
		UNDEFINED	157 THROUGH 255	

MIL-STD-6016B

J13.3 MESSAGE SUMMARY

PURPOSE

The J13.3 Surface (Maritime) Platform and System Status Message provides the current status of a surface (maritime) platform to include ordnance load, operational status, and on board systems' status.

DATA ELEMENT SUMMARY

<u>J13.3I</u>		<u>J13.3C2</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	WORD FORMAT	2
LABEL, J-SERIES	5	CONTINUATION WORD LABEL	5
SUBLABEL, J-SERIES	3	COMMAND AND CONTROL SYSTEM	2
MESSAGE LENGTH INDICATOR	3	DATA LINK AND DISPLAY SYSTEM	2
SPARE	4	NAVIGATION SYSTEM	2
TRACK NUMBER, REFERENCE	19	COMMUNICATION SYSTEM	2
FLIGHT DECK STATUS	3	SURFACE SEARCH RADAR	2
LANDING APPROACH CONDITION	3	2D AIR SEARCH RADAR	2
TIME REPORT FUNCTION	3	3D AIR SEARCH RADAR	2
MINUTE	6	PRECISION APPROACH RADAR	2
HOUR	5	IFF/SIF INTERROGATOR AND	2
SURFACE (MARITIME) SPECIFIC	12	TRANSPONDER SYSTEM	
TYPE		SONAR SYSTEM	2
SPARE	2	ELECTRONIC ATTACK	2
		ELECTRONIC WARFARE SUPPORT AND	2
		OTHER ELECTRONIC ATTACK	
		GUN FIRE CONTROL SYSTEM	2
		GUNS	2
		MISSILE, ROCKET, AND LAUNCHERS	2
		CRUISE MISSILES	2
		EMBARKED ASSAULT CRAFT	2
		ENERGY GENERATION SYSTEM-	2
		NUCLEAR	
		ENERGY GENERATION SYSTEM-	2
		CONVENTIONAL	
		TOMAHAWK WEAPON CONTROL SYSTEM	2
		HARPOON WEAPON CONTROL SYSTEM	2
		SPARE	1
		AIRCRAFT HANDLING, LAUNCH, AND	2
		RECOVERY SYSTEMS	
		FIGHTER AIRCRAFT	2
		ATTACK, STRIKE/FIGHTER	2
		AIRCRAFT	
		FIXED WING ANTI-SUBMARINE	2
		WARFARE AIRCRAFT	
		HELICOPTER ANTI-SUBMARINE	2
		WARFARE AIRCRAFT	
		AIRBORNE EARLY WARNING	2
		AIRCRAFT	
		ELECTRONIC SUPPORT AIRCRAFT	2
		TANKER AIRCRAFT	2
		HELICOPTER SUPPORT AIRCRAFT	2
		SPARE	2

<u>J13.3C1</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
CONTINUATION WORD LABEL	5
MISSILE TYPE, 1	6
SPARE	1
OPERATIONAL MISSILE INVENTORY,	7
1	
SPARE	1
NUMBER OF FIRE CONTROL SYSTEMS	4
AVAILABLE, 1	
MISSILE TYPE, 2	6
SPARE	1
OPERATIONAL MISSILE INVENTORY,	7
2	
SPARE	1
NUMBER OF FIRE CONTROL SYSTEMS	4
AVAILABLE, 2	
MISSILE TYPE, 3	6
SPARE	1
OPERATIONAL MISSILE INVENTORY,	7
3	
SPARE	1
NUMBER OF FIRE CONTROL SYSTEMS	4
AVAILABLE, 3	
FUEL FUNCTION	1
FUEL, SURFACE (MARITIME)	3
SPARE	2

MIL-STD-6016B

J13.3 MESSAGE SUMMARY (Continued)

DATA ELEMENT SUMMARY (Continued)

<u>J13.3C3</u>			# BITS	<u>J13.3C5 (Continued)</u>			# BITS
DATA ELEMENT				DATA ELEMENT			
WORD FORMAT			2	OPERATIONAL MISSILE INVENTORY,			7
CONTINUATION	WORD LABEL		5	4			
ES FREQUENCY BAND A			2	SPARE			1
ES FREQUENCY BAND B			2	NUMBER OF FIRE CONTROL SYSTEMS			4
ES FREQUENCY BAND C			2	AVAILABLE, 4			
ES FREQUENCY BAND D			2	MISSILE TYPE, 5			6
ES FREQUENCY BAND E			2	SPARE			1
ES FREQUENCY BAND F			2	OPERATIONAL MISSILE INVENTORY,			7
ES FREQUENCY BAND G			2	5			
ES FREQUENCY BAND H			2	SPARE			1
ES FREQUENCY BAND I			2	NUMBER OF FIRE CONTROL SYSTEMS			4
ES FREQUENCY BAND J			2	AVAILABLE, 5			
ES FREQUENCY BAND K			2	MISSILE TYPE, 6			6
ES FREQUENCY BAND L			2	SPARE			1
ES FREQUENCY BAND M			2	OPERATIONAL MISSILE INVENTORY,			7
HF DIRECTION FINDER			2	6			
VHF DIRECTION FINDER			2	SPARE			1
UHF DIRECTION FINDER			2	NUMBER OF FIRE CONTROL SYSTEMS			4
EA FREQUENCY BAND A			2	AVAILABLE, 6			
EA FREQUENCY BAND B			2	SPARE			6
EA FREQUENCY BAND C			2				
EA FREQUENCY BAND D			2	<u>J13.3C6</u>			
EA FREQUENCY BAND E			2	DATA ELEMENT			# BITS
EA FREQUENCY BAND F			2	WORD FORMAT			2
EA FREQUENCY BAND G			2	CONTINUATION WORD LABEL			5
EA FREQUENCY BAND H			2	MISSILE TYPE, 7			6
EA FREQUENCY BAND I			2	SPARE			1
EA FREQUENCY BAND J			2	OPERATIONAL MISSILE INVENTORY,			7
EA FREQUENCY BAND K			2	7			
EA FREQUENCY BAND L			2	SPARE			1
EA FREQUENCY BAND M			2	NUMBER OF FIRE CONTROL SYSTEMS			4
DECOY, CHAFF			2	AVAILABLE, 7			
DECOY, IR			2	MISSILE TYPE, 8			6
SPARE			1	SPARE			1
				OPERATIONAL MISSILE INVENTORY,			7
				8			
<u>J13.3C4</u>				SPARE			1
DATA ELEMENT		# BITS		NUMBER OF FIRE CONTROL SYSTEMS			4
WORD FORMAT		2		AVAILABLE, 8			
CONTINUATION WORD LABEL		5		MISSILE TYPE, 9			6
VOICE GROUP A CHANNEL		7		SPARE			1
VOICE GROUP B CHANNEL		7		OPERATIONAL MISSILE INVENTORY,			7
SPARE		49		9			
				SPARE			1
<u>J13.3C5</u>				NUMBER OF FIRE CONTROL SYSTEMS			4
DATA ELEMENT		# BITS		AVAILABLE, 9			
WORD FORMAT		2		SPARE			6
CONTINUATION WORD LABEL		5					
MISSILE TYPE, 4		6					
SPARE		1					

J13.3 MESSAGE SUMMARY (Continued)

DATA ELEMENT SUMMARY (Continued)

<u>J13.3C7</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
CONTINUATION WORD LABEL	5
MISSILE TYPE, 10	6
SPARE	1
OPERATIONAL MISSILE INVENTORY, 10	7
SPARE	1
NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 10	4
MISSILE TYPE, 11	6
SPARE	1
OPERATIONAL MISSILE INVENTORY, 11	7
SPARE	1
NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 11	4
MISSILE TYPE, 12	6
SPARE	1
OPERATIONAL MISSILE INVENTORY, 12	7
SPARE	1
NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 12	4
SPARE	6

MIL-STD-6016B

J13.3 TRANSMIT/RECEIVE RULES

TITLE: Surface (Maritime) Platform and System Status Message

TRANSMIT RULES

1. The J13.3 Surface (Maritime) Platform and System Status message shall be transmitted by JU platforms, by the controlling units of nonJU platforms, or by the C² JUs exercising control over JU platforms.
2. JU platforms shall transmit this message periodically at an RRN = 2 (3.2 minutes, 2.4-4 minute interval) or when data change, but no more than once in any 48-second interval.
3. Controlling units of nonJU platforms and C² JUs exercising control over JU platforms not reporting their own status shall transmit this message periodically at an RRN = 0 (12.8 minutes, 9.6-12.8 minute interval).
4. The controlling units of nonJU platforms and C² JUs exercising control over surface (maritime) platforms shall transmit this message once in response to a J7.1 (ACT = 0 or 1) Data Update Request message.
5. Only the J13.3CX continuation words appropriate to the platform's equipment and stores load need be transmitted. If there are more continuation words containing data than can be transmitted in a single time slot the message shall be transmitted as follows:
 - a. When there is a limit of 3 words per time slot, the J13.3I word followed by two J13.3CX words will be sent. This sequence will be repeated until all continuation words containing data have been sent.
 - b. When there is a limit of 6 words per time slot, the J13.3I word followed by five J13.3CX words will be sent. This sequence will be repeated until all continuation words containing data have been sent.
6. A platform reporting its own status shall set the Reference TN field to the same track number as TN, Source in the header word.

J13.3 TRANSMIT/RECEIVE RULES (Continued)

RECEIVE RULES

There are no receive rules specified for this message.

WORD MAP

WORD NUMBER: J13.3I

WORD TITLE: SURFACE (MARITIME) PLATFORM AND SYSTEM STATUS INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00							
<---								:	SPARE				:	MESSAGE		:	SUBLABEL,		:					:	WORD		:				
								:					:	LENGTH		:	J-SERIES		:	LABEL, J-SERIES				:	FORMAT		:				
								:					:	INDICATOR		:			:					:			:				
								:	4				:	3		:	3		:	5				:	2		:				
49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25							
MINUTE					:	TIME REPORT:		:	LANDING		:	FLIGHT DECK:																			
					:	FUNCTION		:	APPROACH		:	STATUS		:	TRACK NUMBER, REFERENCE																
					:			:	CONDITION		:																				
6					:	3		:	3		:	3		:	19																
					:	69	68	:	67	66	65	64	63	62	61	60	59	58	57	56	:	55	54	53	52	51	:	50			
					:	SP		:	SURFACE (MARITIME) SPECIFIC TYPE												:	HOUR				:	---		:	>	
					:			:													:					:			:		
					:	2		:	12												:	5				:			:		

WORD DESCRIPTION

WORD NUMBER: J13.3I

WORD TITLE: SURFACE (MARITIME) PLATFORM AND SYSTEM STATUS INITIAL WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	00
270	004	LABEL, J-SERIES	2-	6 5	01101
271	005	SUBLABEL, J-SERIES	7-	9 3	011
800	001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
756	004	SPARE	13-	16 4	
769	002	TRACK NUMBER, REFERENCE	17-	35 19	
878	001	FLIGHT DECK STATUS	36-	38 3	
1545	001	LANDING APPROACH CONDITION	39-	41 3	
1681	002	TIME REPORT FUNCTION	42-	44 3	
797	004	MINUTE	45-	50 6	
792	001	HOURL	51-	55 5	
808	001	SURFACE (MARITIME) SPECIFIC TYPE	56-	67 12	
756	002	SPARE (SP)	68-	69 2	

FIELD CODING FOR J13.3I

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----		A REFERENCE NUMBER USED TO ASSOCIATE INFORMATION AND DIRECTIVES WITH THE TRACK. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE-BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANNN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6
00111	7
01000	A
01001	B
01010	C
01011	D
01100	E
01101	F
01110	G
01111	H

FIELD CODING FOR J13.3I

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
				10000 J
				10001 K
				10010 L
				10011 M
				10100 N
				10101 P
				10110 Q
				10111 R
				11000 S
				11001 T
				11010 U
				11011 V
				11100 W
				11101 X
				11110 Y
				11111 Z
		00000	0	NO STATEMENT.
		00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU). ILLEGAL.
		00077	63	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU). RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		00100-00175	64 THROUGH 125	COLLECTIVE ADDRESS.
		00176	126	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		00177	127	ILLEGAL.
		00200-07776	128 THROUGH 4094	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		07777	4095	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		0A000-0Z777	4096 THROUGH 16383	ILLEGAL.
		10000-17777	16384 THROUGH 20479	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.

FIELD CODING FOR J13.3I

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		20000-27777	32768 THROUGH 36863	REFERENCE POINTS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE

FIELD CODING FOR J13.3I

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		70000-77776	114688 THROUGH 118782	USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		7A000-ZZ777	118784 THROUGH 524287	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
				ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
878	001	FLIGHT DECK STATUS -----		THE OPERATIONAL STATUS OF A SHIPS FLIGHT DECK.
		NO STATEMENT	0	
		READY DECK	1	FLIGHT DECK IS IMMEDIATELY AVAILABLE FOR LANDING.
		FOUL DECK	2	FLIGHT DECK IS TEMPORARILY UNAVAILABLE FOR LANDING.
		CLOSED DECK	3	FLIGHT DECK IS UNAVAILABLE FOR LANDING.
		UNDEFINED	4 THROUGH 7	
1545	001	LANDING APPROACH CONDITION -----		DESCRIBES THE METEOROLOGICAL CONDITION OF THE APPROACH AND RECOVERY ROUTE TO THE AIRCRAFT CARRIER.
		NO STATEMENT	0	
		CV RECOVERY CASE I	1	THE APPROACH AND RECOVERY ROUTE TO THE CV ARE UNDER VISUAL METEOROLOGICAL CONDITIONS.
		CV RECOVERY CASE II	2	THE APPROACH AND RECOVERY ROUTE TO THE CV ARE VARYING BETWEEN INSTRUMENT AND VISUAL METEOROLOGICAL CONDITIONS.
		CV RECOVERY CASE III	3	THE APPROACH AND RECOVERY ROUTE TO THE CV ARE UNDER INSTRUMENT METEOROLOGICAL CONDITIONS.
		UNDEFINED	4 THROUGH 7	

FIELD CODING FOR J13.3I

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1681	002	TIME REPORT FUNCTION -----		USED IN CONJUNCTION WITH THE MINUTE AND HOUR FIELDS TO DESCRIBE THEIR USE.
		NO STATEMENT	0	
		TIME OF REPORT	1	THE TIME OF DAY IN HOURS AND MINUTES THAT THE REPORT WAS RELEASED FOR TRANSMISSION.
		DISUSED	2	
		ARRIVE ON STATION	3	DELTA TIME IN HOURS AND MINUTES FROM THE TIME THE REPORT WAS RELEASED FOR TRANSMISSION BEFORE A UNIT ARRIVES ON STATION.
		TIME REMAINING ON STATION	4	DELTA TIME IN HOURS AND MINUTES FROM THE TIME THE REPORT WAS RELEASED FOR TRANSMISSION INDICATING THE ESTIMATED TIME THAT AN AIRCRAFT CAN REMAIN ON TASK, TAKING INTO ACCOUNT SUCH OPERATIONAL FACTORS AS FUEL STATE, WEATHER, DISTANCE FROM BASE, ETC. ILLEGAL FOR USE IN THE J13.3.
		DEPART STATION	5	THE TIME OF DAY IN HOURS AND MINUTES THAT A UNIT IS SCHEDULED TO LEAVE ITS STATION IN ACCORDANCE WITH ITS MISSION PLAN, OR THE TIME OF DAY THAT THE UNIT LEFT ITS STATION.
		TIME ON TARGET	6	DELTA TIME IN HOURS AND MINUTES FROM TIME OF CURRENT REPORT.
		UNDEFINED	7	
797	004	MINUTE -----		THE MINUTE OF THE HOUR.
		0 THROUGH 59	0 THROUGH 59	IN ONE MINUTE INCREMENTS.
		ILLEGAL	60 THROUGH 62	
		NO STATEMENT	63	
792	001	HOUR ----		EXPRESSES TIME OF DAY OR A PERIOD OF TIME IN HOURS.
		0 HOUR	0	
		1 THROUGH 23 HOURS	1 THROUGH 23	IN ONE HOUR INCREMENTS.
		ILLEGAL	24 THROUGH 30	
		NO STATEMENT	31	

5.3-128

MIL-STD-6016B

FIELD CODING FOR J13.3I

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----		THE SPECIFIC TYPE OF POINT OR TRACK WITH AN ENVIRONMENT/CATEGORY OF SURFACE (MARITIME).
		NO STATEMENT	0	
		CV GENERAL	1	
		CLEMENCEAU	2	
		ENTERPRISE	3	
		FORRESTAL	4	
		JOHN F KENNEDY	5	
		KITTY HAWK	6	
		MIDWAY	7	
		NIMITZ	8	
		CHARLES DE GAULLE	9	
		UNDEFINED	10 THROUGH 21	
		CVS GENERAL	22	
		DEDALO	23	
		MINAS GERAIS	24	
		VIKRANT	25	
		VEINTICINCO DE MAYO	26	
		VIRAAT	27	
		UNDEFINED	28 THROUGH 35	
		CVH GENERAL	36	
		GIUSEPPE GARIBALDI	37	
		INVINCIBLE	38	
		JEANNE D'ARC	39	
		KIEV	40	
		PRINCIPE DE ASTURIAS	41	
		UNDEFINED	42	
		KIEV (MODIFIED)	43	
		UNDEFINED	44 THROUGH 52	
		BB GENERAL	53	
		IOWA	54	
		UNDEFINED	55 THROUGH 64	
		CC GENERAL	65	
		SVERDLOV (MODIFIED)	66	
		UNDEFINED	67 THROUGH 76	
		CG GENERAL	77	
		ANDREA DORIA	78	
		BAINBRIDGE	79	
		BELKNAP	80	
		CALIFORNIA	81	
		UNDEFINED	82	
		KARA	83	
		KIROV	84	
		KRESTA I	85	

FIELD CODING FOR J13.3I

(SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		KRESTA II	86	
		KYNDA	87	
		LEAHY	88	
		LONG BEACH	89	
		SLAVA	90	
		TICONDEROGA	91	
		TRUXTUN	92	
		VIRGINIA	93	
		VITTORIO VENETO	94	
		UNDEFINED	95 THROUGH 118	
		CH GENERAL	119	
		MOSKVA	120	
		UNDEFINED	121 THROUGH 130	
		CA GENERAL	131	
		UNDEFINED	132	
		SVERDLOV	133	
		UNDEFINED	134 THROUGH 143	
		DD GENERAL	144	
		AKIZUKI	145	
		ALLEN M SUMNER	146	
		ALLEN M SUMNER FRAM II	147	
		ALMIRANTE	148	
		AMATSUKAZE	149	
		ANIMOSO	150	
		ANSHAN	151	
		ARLEIGH BURKE	152	
		ASAGARI	153	
		UNDEFINED	154	
		AUDACE	155	
		AYANAMI	156	
		DISUSED	157	
		CARPENTER FRAM I	158	
		CHARLES F ADAMS (MOD)	159	
		CHARLES F ADAMS	160	
		COONTZ	161	
		DISUSED	162 THROUGH 163	
		UNDEFINED	164	
		FLETCHER	165	
		FORREST SHERMAN (MOD) & HULL	166	
		FRIESLAND	167	
		GEARING FRAM I	168	

FIELD CODING FOR J13.3I

(SHEET 8)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		GEARING FRAM II	169	
		UNDEFINED	170	
		DISUSED	171	
		HARUNA	172	
		HATAKAZE	173	
		HATSUYUKI	174	
		IMPAVIDO	175	
		KANIN	176	
		KASHIN (MODIFIED)	177	
		KASHIN	178	
		KASHIN II	179	
		KIDD	180	
		UNDEFINED	181	
		KILDIN (MODIFIED)	182	
		KOTLIN	183	
		KOTLIN (MODIFIED)	184	
		LUDA (TYPE 051)	185	
		MEKO 360	186	
		MINEGUMO	187	
		PROJECT 15	188	
		ROBERT H SMITH	189	
		ROGER D LAURIA	190	
		SAM KOTLIN	191	
		SHIRANE	192	
		SKORY	193	
		SOVREMENYY	194	
		SPRUANCE	195	
		SUFFREN	196	
		TACHIKAZE	197	
		TAKATSUKI	198	
		TYPE 42	199	
		DISUSED	200	
		DISUSED	201	
		TYPE F-70 (AAW)	202	
		TYPE F-70 (ASW)	203	
		TYPE F-67	204	
		UNDEFINED	205 THROUGH 206	
		TYPE T-53 (MODIFIED-ASW)	207	
		UNDEFINED	208	
		UDALOY	209	
		YAMAGUMO	210	
		Z	211	

FIELD CODING FOR J13.3I

(SHEET 9)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		IROQUOIS	212	
		UNDEFINED	213 THROUGH 276	
		DE GENERAL	277	
		UNDEFINED	278	
		CASTLE	279	
		UNDEFINED	280 THROUGH 295	
		FF GENERAL	296	
		ALMIRANTE CLEMENTE	297	
		ALMIRANTE PEREIRA DA SILVA	298	
		ALPINO	299	
		DISUSED	300 THROUGH 301	
		BALEARES	302	
		BAPTISTA DE ANDRADE	303	
		UNDEFINED	304	
		BERK	305	
		BLACK SWAN	306	
		BROADSWORD (TYPE 22)	307	
		BRONSTEIN	308	
		BROOKE	309	
		CANNON	310	
		CHARLES LAWRENCE	311	
		CHENGDU	312	
		CHIKUGO	313	
		COMANDANTE JOAO BELO	314	
		UNDEFINED	315	
		CROSLEY	316	
		DEALEY	317	
		DESCUBIERTA	318	
		DUKE (TYPE 23)	319	
		DURANGO	320	
		EDSALL	321	
		GARCIA	322	
		GLOVER	323	
		GODAVARI	324	
		GRISHA I	325	
		GRISHA II	326	
		GRISHA III	327	
		UNDEFINED	328	
		GRISHA V	329	
		UNDEFINED	330	
		HVIDBJORNEN	331	

FIELD CODING FOR J13.3I

(SHEET 10)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		ISHKARI	332	
		ISUZU	333	
		JACOB VAN HEEMSKERCK	334	
		JIANGDONG (TYPE 053J)	335	
		JIANGHU (TYPE 053H)	336	
		JIANGNAN	337	
		JOAO COUTINHO	338	
		KAREL DOORMAN	339	
		KNOX	340	
		DISUSED	341	
		KONI	342	
		KORTENAER	343	
		KRIVAK I	344	
		KRIVAK II	345	
		KRIVAK III	346	
		LA FAYETTE	347	
		DISUSED	348	
		LEOPARD	349	
		LUPU	350	
		M	351	
		DISUSED	352	
		MAESTRALE	353	
		MEKO 140 TYPE	354	
		MEKO 200 TYPE	355	
		MIRKA I	356	
		MIRKA II	357	
		NIELS JUEL	358	
		NITEROI	359	
		OLIVER HAZARD PERRY	360	
		OSLO	361	
		PEDER SKRAM	362	
		PETYA I (MODIFIED)	363	
		PETYA I	364	
		PETYA II (MODIFIED)	365	
		PETYA II	366	
		PETYA III	367	
		UNDEFINED	368	
		DISUSED	369	
		RIGA	370	
		RIVER	371	
		BRANDENBURG (TYPE 123)	372	
		RUDDEROW	373	

FIELD CODING FOR J13.3I

(SHEET 11)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		SACHSEN (TYPE 124)	374	
		SAVAGE	375	
		DISUSED	376	
		TROMP	377	
		TYPE A 69	378	
		TYPE F-2000S	379	
		UNDEFINED	380 THROUGH 381	
		YUBARI	382	
		BREMEN (TYPE 122)	383	
		CLAUDE JONES	384	
		FFG 7	385	
		HALIFAX	386	
		NAJIN	387	
		PRESIDENT	388	
		SANTA MARIA	389	
		VOSPER MK 5	390	
		VOSPERTHORNYCROFT MK 7	391	
		WIELINGEN	392	
		FLOREAL	393	
		COMMANDANT BORY	394	
		UNDEFINED	395 THROUGH 478	
		FS GENERAL	479	
		ALBATROS	480	
		AUK CLASS	481	
		DE CRISTOFARO	482	
		DISUSED	483	
		MINERVA	484	
		NANUCHKA I	485	
		NANUCHKA II	486	
		NANUCHKA III	487	
		DISUSED	488	
		PF-103	489	
		SAAR 5	490	
		SLEIPNER	491	
		TARANTUL I	492	
		TARANTUL II	493	
		DISUSED	494	
		WADI	495	
		UNDEFINED	496 THROUGH 517	
		LL GENERAL	518	
		UNDEFINED	519 THROUGH 528	
		LCC GENERAL	529	

FIELD CODING FOR J13.3I

(SHEET 12)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		BLUE RIDGE	530	
		CAVEZZALE	531	
		UNDEFINED	532 THROUGH 540	
		LKA GENERAL	541	
		CHARLESTON	542	
		UNDEFINED	543 THROUGH 552	
		LFS GENERAL	553	
		UNDEFINED	554 THROUGH 563	
		LHA GENERAL	564	
		TARAWA	565	
		UNDEFINED	566 THROUGH 575	
		LHD GENERAL	576	
		WASP	577	
		UNDEFINED	578 THROUGH 587	
		LPA GENERAL	588	
		UNDEFINED	589 THROUGH 598	
		LPD GENERAL	599	
		AUSTIN	600	
		FEARLESS	601	
		IVAN ROGOV	602	
		UNDEFINED	603	
		RALEIGH	604	
		SAN GIORGIO	605	
		UNDEFINED	606 THROUGH 615	
		LPH GENERAL	616	
		IWO JIMA	617	
		UNDEFINED	618 THROUGH 627	
		LSD GENERAL	628	
		ANCHORAGE	629	
		ASHLAND	630	
		CABILDO	631	
		OURAGAN	632	
		FOUDRE	633	
		THOMASTON	634	
		WHIDBEY ISLAND	635	
		UNDEFINED	636 THROUGH 646	
		LSL GENERAL	647	
		SIR GERAINT	648	
		UNDEFINED	649 THROUGH 657	
		LSM GENERAL	658	
		ASHDOD	659	
		BATRAL	660	

FIELD CODING FOR J13.3I

(SHEET 13)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		CAKABEY	661	
		EDIC I	662	
		EDIC II	663	
		LSM-1	664	
		MP-4	665	
		POLNOCHNY	666	
		POLOCHNY A	667	
		POLOCHNY B	668	
		POLOCHNY C	669	
		POLOCHNY D	670	
		YUDAO	671	
		YULIMG	672	
		BOUGAINVILLE	673	
		UNDEFINED	674 THROUGH 687	
		LST GENERAL	688	
		ALLIGATOR	689	
		ATSUMI	690	
		UNDEFINED	691	
		BROOKE MARINE 93M	692	
		CAKABEY NL-122	693	
		CNIM PS 700	694	
		DE SOTO COUNTY	695	
		DISUSED	696	
		HENGAM	697	
		LST 1-510	698	
		LST 511-1152	699	
		MIURA	700	
		NEWPORT	701	
		ROPUCHA	702	
		SARUCABEY	703	
		CNGF	704	
		OCEAN	705	
		ALBION	706	
		TERREBONNE PARISH	707	
		TOBRUK	708	
		UNDEFINED	709	
		YUKAN	710	
		UNDEFINED	711 THROUGH 730	
		LSV GENERAL	731	
		UNDEFINED	732 THROUGH 741	
		LC GENERAL	742	
		UNDEFINED	743 THROUGH 751	

FIELD CODING FOR J13.3I

(SHEET 14)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		LCM GENERAL	752	
		CTM 1	753	
		HUNGNAM	754	
		LCM 1057/1058	755	
		LCM 6	756	
		LCM 8	757	
		T-4	758	
		TSAPLYA	759	
		LCM (TYPE 521)	760	
		UNDEFINED	761 THROUGH 772	
		LCP GENERAL	773	
		DISUSED	774	
		LCM 1031	775	
		LCM 1035/1036	776	
		LCM 1055/1056	777	
		NAMPO	778	
		UNDEFINED	779 THROUGH 788	
		LCPL GENERAL	789	
		UNDEFINED	790 THROUGH 799	
		LWC GENERAL	800	
		UNDEFINED	801 THROUGH 810	
		LCU GENERAL	811	
		BALIKPAPAN	812	
		BOMBARDA	813	
		BRAILA	814	
		LCU (TYPE 520)	815	
		DISUSED	816	
		DISUSED	817	
		DISUSED	818	
		DSM-501	819	
		HANCHON	820	
		HANTAE	821	
		KISHON	822	
		KVALSUND	823	
		LCT MK 5	824	
		LCT MK 6	825	
		LCU 501	826	
		MFP D-3	827	
		MZ	828	
		REINOYSUND	829	
		SMB-1	830	
		TU 57-M	831	

FIELD CODING FOR J13.3I

(SHEET 15)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		US LCU 1466	832	
		VYDRA	833	
		YURA	834	
		UNDEFINED	835 THROUGH 866	
		LCVP GENERAL	867	
		UNDEFINED	868 THROUGH 877	
		LCAC GENERAL	878	
		AIST	879	
		GUS	880	
		LEBED	881	
		UTENOK	882	
		WELLINGTON BH-7 MK 4	883	
		WELLINGTON BH-7 MK 5	884	
		WINCHESTER (SR.N6)	885	
		UNDEFINED	886 THROUGH 896	
		MM GENERAL	897	
		ALESHA	898	
		ALVSBORG	899	
		BORGEN	900	
		CARLSKRONA	901	
		COSAR	902	
		FALSTER	903	
		FURUSUND (MUL-20)	904	
		LANGELAND	905	
		LINDORMEN	906	
		LSM-1 (MODIFIED)	907	
		MUL-11	908	
		MUL-12	909	
		DISUSED	910	
		SMITH	911	
		US YMP	912	
		VIDAR	913	
		UNDEFINED	914 THROUGH 935	
		MCS GENERAL	936	
		UNDEFINED	937 THROUGH 946	
		MCJ GENERAL	947	
		UNDEFINED	948 THROUGH 957	
		MCD GENERAL	958	
		KINGSTON	959	
		MUEHLHAUSEN MCD (TYPE 742A)	960	
		UNDEFINED	961 THROUGH 968	

FIELD CODING FOR J13.3I

(SHEET 16)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		MCM GENERAL	969	
		UNDEFINED	970 THROUGH 979	
		MH GENERAL	980	
		UNDEFINED	981 THROUGH 990	
		MHO GENERAL	991	
		UNDEFINED	992 THROUGH 1001	
		MHC GENERAL	1002	
		ADJUTANT (MODIFIED)	1003	
		AGGRESSIVE	1004	
		CIRCE	1005	
		WEIDEN MHC (TYPE 332)	1006	
		KOBLENZ MHC (TYPE 331B)	1007	
		HAM	1008	
		HUNT	1009	
		LANDSORT	1010	
		LERICI	1011	
		MSC 50	1012	
		MSO 218	1013	
		MSO 503	1014	
		SAUDA	1015	
		SIRIUS	1016	
		DISUSED	1017	
		TRIPARTITE	1018	
		VANYA I	1019	
		SANDOWN (SRMH)	1020	
		UNDEFINED	1021 THROUGH 1029	
		MHSC GENERAL	1030	
		MARS	1031	
		UNDEFINED	1032 THROUGH 1043	
		MHI GENERAL	1044	
		BAY	1045	
		UNDEFINED	1046 THROUGH 1054	
		MHA GENERAL	1055	
		UNDEFINED	1056 THROUGH 1065	
		ML GENERAL	1066	
		UNDEFINED	1067 THROUGH 1076	
		MLC GENERAL	1077	
		CURLEW	1078	
		UNDEFINED	1079 THROUGH 1088	
		MLI GENERAL	1089	
		UNDEFINED	1090 THROUGH 1099	
		MLO GENERAL	1100	

FIELD CODING FOR J13.3I

(SHEET 17)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		UNDEFINED	1101 THROUGH 1110	
		MLR GENERAL	1111	
		UNDEFINED	1112 THROUGH 1121	
		MLA GENERAL	1122	
		UNDEFINED	1123 THROUGH 1132	
		MLS GENERAL	1133	
		UNDEFINED	1134 THROUGH 1143	
		MS GENERAL	1144	
		UNDEFINED	1145 THROUGH 1154	
		MSF GENERAL	1155	
		EX-ERIMO	1156	
		K-8	1157	
		KROGULEC	1158	
		M-40	1159	
		MS0-421	1160	
		NATYA I	1161	
		NATYA II	1162	
		RIVER	1163	
		T-43	1164	
		YURKA	1165	
		UNDEFINED	1166 THROUGH 1180	
		MS0 GENERAL	1181	
		ACME	1182	
		AGGRESSIVE	1183	
		UNDEFINED	1184 THROUGH 1193	
		MSC GENERAL	1194	
		136 FT	1195	
		ADJUTANT	1196	
		ARKOE	1197	
		BAY	1198	
		DOKKUM	1199	
		HATSUSHIMA	1200	
		HAYASE	1201	
		DISUSED	1202	
		KOUZJ	1203	
		LENIWKA	1204	
		HAMELN MSC (TYPE 343)	1205	
		MSC 268	1206	
		MSC 292	1207	
		MSC 294	1208	
		NOTEC	1209	
		SASHA	1210	

FIELD CODING FOR J13.3I

(SHEET 18)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		SAUDA	1211	
		DISUSED	1212	
		DISUSED	1213	
		SONYA	1214	
		T-301	1215	
		T-43	1216	
		TAKAMI	1217	
		DISUSED	1218	
		VANYA	1219	
		VANYA I	1220	
		VANYA II	1221	
		WUSONG	1222	
		ZHENYA	1223	
		UNDEFINED	1224 THROUGH 1263	
		MSI GENERAL	1264	
		DISUSED	1265	
		AUX MINESWEEPER NO 1	1266	
		CAPE	1267	
		FRAUENLOB (TYPE 394)	1268	
		HAM	1269	
		HERSTAL	1270	
		KIISKI	1271	
		KUHA	1272	
		M-111	1273	
		M-15	1274	
		M-31	1275	
		M-43/47	1276	
		PIPA-A	1277	
		WOCHANG	1278	
		YEVGENYA	1279	
		YUKTO	1280	
		UNDEFINED	1281 THROUGH 1302	
		MSR GENERAL	1303	
		UNDEFINED	1304 THROUGH 1313	
		MSB GENERAL	1314	
		K-8	1315	
		N-300	1316	
		NESTIN	1317	
		NO. 7	1318	
		OLYA	1319	
		PO-2	1320	
		TR-40	1321	

5.3-141

MIL-STD-6016B

FIELD CODING FOR J13.3I

(SHEET 19)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		VD-141	1322	
		VULCAIN	1323	
		STYX	1324	
		PLUTON	1325	
		ACHERON	1326	
		UNDEFINED	1327 THROUGH 1334	
		MSA GENERAL	1335	
		UNDEFINED	1336 THROUGH 1345	
		MSD GENERAL	1346	
		HFG-1 (TROIKA)	1347	
		ILYUSHA	1348	
		UNDEFINED	1349 THROUGH 1358	
		MCSD GENERAL	1359	
		UNDEFINED	1360 THROUGH 1369	
		MSS GENERAL	1370	
		ANDRYUSHA	1371	
		BALTIKA	1372	
		POLNOCNY	1373	
		UNDEFINED	1374 THROUGH 1383	
		MSH GENERAL	1384	
		UNDEFINED	1385 THROUGH 1394	
		MSO GENERAL	1395	
		BERLAIMONT (MODIFIED)	1396	
		UNDEFINED	1397 THROUGH 1405	
		MSHC GENERAL	1406	
		HUNT	1407	
		TRIPARTITE	1408	
		WILTON	1409	
		UNDEFINED	1410 THROUGH 1419	
		PP GENERAL	1420	
		AB 25	1421	
		UNDEFINED	1422	
		BALDER	1423	
		CASTLE	1424	
		ISLAND	1425	
		KRONSHADT	1426	
		PC-1638	1427	
		UNDEFINED	1428 THROUGH 1438	
		PG GENERAL	1439	
		BESKYTTEVREN	1440	
		BIHORO	1441	
		ERIMO	1442	

FIELD CODING FOR J13.3I

(SHEET 20)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		DISUSED	1443	
		HVIDBJOERNEN	1444	
		IZU	1445	
		KOJIMA	1446	
		UNDEFINED	1447	
		NOJIMA	1448	
		PAUK	1449	
		PEACOCK	1450	
		POTI	1451	
		SAVAGE	1452	
		SHIRETOKO	1453	
		SOYA	1454	
		TACOMA	1455	
		LEOPARD (TYPE 148)	1456	
		BAMBU	1457	
		CASSIOPEA	1458	
		UNDEFINED	1459	THROUGH 1480
		PGS GENERAL	1481	
		UNDEFINED	1482	THROUGH 1491
		PGB GENERAL	1492	
		UNDEFINED	1493	THROUGH 1502
		PGF GENERAL	1503	
		ALBATROS (TYPE 143)	1504	
		ASHEVILLE	1505	
		BARNEGAT	1506	
		CHONGJU	1507	
		GEPAARD (TYPE 143A)	1508	
		HOUKU	1509	
		IVANSUSANIN	1510	
		KAMAN	1511	
		KARTAL	1512	
		KOMAR	1513	
		LA COMBATTANTE II	1514	
		LA COMBATTANTE III	1515	
		LURSSSEN FPB 57 TYPE	1516	
		OKHTENSKIY	1517	
		OSA I	1518	
		OSA II	1519	
		P-4	1520	
		PURGA	1521	
		SAAR 2	1522	
		SAAR 3	1523	

5.3-143

MIL-STD-6016B

FIELD CODING FOR J13.3I

(SHEET 21)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		SAAR 4	1524	
		SAAR 5	1525	
		SARIWON	1526	
		SNOEGG	1527	
		SOHUNG	1528	
		SOJU	1529	
		SORUM	1530	
		STORM	1531	
		T	1532	
		T-43	1533	
		T-58	1534	
		VOSPER 100-FT	1535	
		VOSPER BRAVE	1536	
		WILLEMOES	1537	
		UNDEFINED	1538 THROUGH 1583	
		PC GENERAL	1584	
		ADMIRABLE	1585	
		AGDLEK	1586	
		AKIZUKI	1587	
		ATTACK	1588	
		BAY	1589	
		DISUSED	1590	
		BROOKE MARINE 108-FT	1591	
		CACINE	1592	
		CHONGJU	1593	
		DAPHNE	1594	
		GDANSK	1595	
		HAIKOU	1596	
		HAINAN	1597	
		HANOE	1598	
		K-48	1599	
		KRALJEVICA	1600	
		KRONSHADT	1601	
		LAKE	1602	
		MAGAEN	1603	
		MATSUNAMI	1604	
		MIZUTORI	1605	
		MURAKUMO	1606	
		OBLUZE	1607	
		PGM 71	1608	
		SDB MK II	1609	
		SDB MK III	1610	

FIELD CODING FOR J13.3I

(SHEET 22)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		SEAFORTH	1611	
		SHANGHAI	1612	
		SHANGHAI II	1613	
		SHANGHAI II (MODIFIED)	1614	
		SHIKINAMI	1615	
		SO-1	1616	
		SOMAN	1617	
		STENKA	1618	
		T-58	1619	
		TAECHONG	1620	
		UK FORD	1621	
		UMIGIRI	1622	
		US 110-FT	1623	
		US 173-FT	1624	
		UNDEFINED	1625	
		ARCHER	1626	
		ATTACKER	1627	
		23M PC (MANLY)	1628	
		UNDEFINED	1629	THROUGH 1681
		PCF GENERAL	1682	
		BABOCHKA	1683	
		MURAVEY	1684	
		POTI	1685	
		SO-1 (MODIFIED)	1686	
		UNDEFINED	1687	THROUGH 1696
		PCE GENERAL	1697	
		UNDEFINED	1698	THROUGH 1707
		PB GENERAL	1708	
		AKAGI	1709	
		AKIZUKI	1710	
		ALBATROZ	1711	
		ATTACK P-90	1712	
		BARSO	1713	
		BAY	1714	
		BIZAN	1715	
		BROOKE MARINE 37.5M	1716	
		CHONGJIN	1717	
		DABUR	1718	
		DALARO	1719	
		DE L'ESTEREL	1720	
		DILOS	1721	
		DOM ALEIXO	1722	

FIELD CODING FOR J13.3I

(SHEET 23)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		DISUSED	1723	
		FREMANTLE	1724	
		GOULANDRIS	1725	
		GUANABACOA	1726	
		HAMAGIRI	1727	
		HAMELIN 37M	1728	
		HIDAKA	1729	
		HUANGPU	1730	
		INTERCEPTOR MK II	1731	
		KIMJIN 67-FT	1732	
		MATSUNAMI	1733	
		MURAKUMO	1734	
		OIRASE	1735	
		P 400	1736	
		P-6	1737	
		PANAGOPOULOS	1738	
		PATRA	1739	
		PBR MK II	1740	
		PBR MK III	1741	
		PGM 71	1742	
		PO-2	1743	
		POLISH K-8	1744	
		POLUCHAT I	1745	
		SHANTOU	1746	
		SHIKINAMI	1747	
		SINHUNG 72-FT	1748	
		SKANOER	1749	
		SOYA/TSUGARU	1750	
		SPEAR	1751	
		STEWART 85-FT	1752	
		SWATOW	1753	
		SWIFT	1754	
		TAISHAN	1755	
		TESHIO	1756	
		TRACKER II	1757	
		US 110-FT	1758	
		US ARMY 2001 65-FT	1759	
		USCG 83-FT	1760	
		VEDETTE 28 92-FT	1761	
		VIKRAM	1762	
		VOSPER 70-FT	1763	
		YAMAYURI	1764	

FIELD CODING FOR J13.3I

(SHEET 24)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		ZHUK	1765	
		SNOEGG	1766	
		MARS	1767	
		TRIDENT	1768	
		UNDEFINED	1769 THROUGH 1842	
		PBF GENERAL	1843	
		CHAO (CHODO)	1844	
		DE L'ESTEREL	1845	
		GIRNE	1846	
		HAUK	1847	
		HUGIN	1848	
		SLEPEN	1849	
		UNDEFINED	1850	
		SPICA II	1851	
		MARS	1852	
		UNDEFINED	1853 THROUGH 1863	
		PBS GENERAL	1864	
		UNDEFINED	1865 THROUGH 1874	
		PBR GENERAL	1875	
		LEIE	1876	
		PIYAVKA	1877	
		SHMEL	1878	
		VOSH	1879	
		YATUSH	1880	
		YAZ	1881	
		UNDEFINED	1882 THROUGH 1891	
		PT GENERAL	1892	
		AN JU	1893	
		EPITROP	1894	
		HIGGINS 78-FT	1895	
		HUCHUAN PTH-	1896	
		HUZHOU	1897	
		IWON	1898	
		DISUSED	1899	
		KU SONG	1900	
		NO. 11	1901	
		P-4	1902	
		P-6	1903	
		PILICA	1904	
		SHERSHEN	1905	
		SIN HUNG	1906	
		SIN NAM	1907	

FIELD CODING FOR J13.3I

(SHEET 25)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		SINPO	1908	
		SOLOVEN	1909	
		SPICA	1910	
		TJELD	1911	
		WISLA	1912	
		DISUSED	1913	
		SHANGDONG	1914	
		TURYA	1915	
		UNDEFINED	1916 THROUGH 2047	
		PHM GENERAL	2048	
		MATKA	2049	
		PEGASUS	2050	
		SARANCHA	2051	
		SHIMRIT	2052	
		SPARVIERO	2053	
		UNDEFINED	2054 THROUGH 2063	
		BM GENERAL	2064	
		UNDEFINED	2065 THROUGH 2074	
		BMR GENERAL	2075	
		UNDEFINED	2076 THROUGH 2085	
		SWCL GENERAL	2086	
		UNDEFINED	2087 THROUGH 2096	
		AA GENERAL	2097	
		UNDEFINED	2098 THROUGH 2107	
		AG GENERAL	2108	
		ADOLF	2109	
		AKIZUKI	2110	
		ANGARA	2111	
		ARGO	2112	
		AYANAMI	2113	
		DISUSED	2114 THROUGH 2115	
		CHAMOIS	2116	
		CHIHAYA	2117	
		DALDYN	2118	
		DISUSED	2119	
		DINGHAI	2120	
		ENDURANCE	2121	
		EXPLORER	2122	
		DISUSED	2123	
		FRIPONNE	2124	
		GALEB	2125	
		UNDEFINED	2126	

FIELD CODING FOR J13.3I

(SHEET 26)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		HAM	2127	
		DISUSED	2128	
		HAYABUSA	2129	
		DISUSED	2130	
		ISLES	2131	
		KEYLA	2132	
		KURIHAMA	2133	
		L' ARCHEONAUTE	2134	
		L' ATHOS	2135	
		UNDEFINED	2136	
		LENTRA	2137	
		LIANYUN	2138	
		LSIL	2139	
		MIZUTORI	2140	
		MP-2	2141	
		MP-8	2142	
		MURASAME	2143	
		NEFTEGAZ	2144	
		NØ. 81	2145	
		NORGE	2146	
		OHRE	2147	
		ONEGA	2148	
		DISUSED	2149	
		POSEIDON	2150	
		PS-10	2151	
		RARI	2152	
		RHIN	2153	
		SABAC	2154	
		SHAHAJAR	2155	
		ST. LYKODIS	2156	
		STALWART	2157	
		T-43	2158	
		TAPATAI	2159	
		TAPPE	2160	
		THULE	2161	
		TOMBA	2162	
		TSUGARU	2163	
		UMITAKA	2164	
		US 184 FT. PCE	2165	
		US 72 FT. HMDL	2166	
		VANGUARD	2167	
		VIS	2168	

FIELD CODING FOR J13.3I

(SHEET 27)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		VYTEGRALES	2169	
		WHISKEY	2170	
		WILHELM PULLWER (TYPE 741)	2171	
		PELIKAAN	2172	
		RANCE	2173	
		MERCURE	2174	
		STERNE	2175	
		ALBATROS	2176	
		PHENIX	2177	
		UNDEFINED	2178 THROUGH 2256	
		ARV GENERAL	2257	
		ARGUS	2258	
		ENGADINE	2259	
		RELIANT	2260	
		UNDEFINED	2261 THROUGH 2270	
		AVT GENERAL	2271	
		LEXINGTON	2272	
		UNDEFINED	2273 THROUGH 2282	
		AE GENERAL	2283	
		EVROS	2284	
		DISUSED	2285	
		KILAUEA	2286	
		NITRO	2287	
		REGENT	2288	
		SURIBACHI	2289	
		WESTERWALD (TYPE 760)	2290	
		UNDEFINED	2291 THROUGH 2301	
		AEL GENERAL	2302	
		UNDEFINED	2303 THROUGH 2312	
		AET GENERAL	2313	
		UNDEFINED	2314 THROUGH 2323	
		AETL GENERAL	2324	
		UNDEFINED	2325 THROUGH 2334	
		AGF GENERAL	2335	
		ABDIEL	2336	
		CORONADO	2337	
		GODETIA	2338	
		LA SALLE	2339	
		DISUSED	2340	
		ZINNIA	2341	
		ELBE (TYPE 404)	2342	

FIELD CODING FOR J13.3I

(SHEET 28)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		UNDEFINED	2343 THROUGH 2351	
		ACM GENERAL	2352	
		UNDEFINED	2353 THROUGH 2362	
		APB GENERAL	2363	
		MICHELANGELO	2364	
		UNDEFINED	2365 THROUGH 2374	
		ABU GENERAL	2375	
		CARDENAS	2376	
		FINIK I	2377	
		KARPF II	2378	
		SKB 64	2379	
		YANTAI	2380	
		YANNAN	2381	
		YANGUAN	2382	
		TIANEE	2383	
		LA PRUDENTE	2384	
		UNDEFINED	2385 THROUGH 2395	
		ABUD GENERAL	2396	
		UNDEFINED	2397 THROUGH 2406	
		ANL GENERAL	2407	
		UNDEFINED	2408 THROUGH 2417	
		ARC GENERAL	2418	
		EMBA I	2419	
		EMBA II	2420	
		KALAR	2421	
		KLASMA	2422	
		MP-2	2423	
		NEPTUNE	2424	
		TELNOVSK (MODIFIED)	2425	
		YOUDIAN	2426	
		ZEUS	2427	
		UNDEFINED	2428 THROUGH 2440	
		AK GENERAL	2441	
		2ND LT JOHN P BOBO	2442	
		ALCHIBA	2443	
		AMGUEMA	2444	
		ANDIZHAN	2445	
		ANDONG	2446	
		ANDROMEDA (CONVERTED)	2447	
		DISUSED	2448	
		BARRICADE	2449	
		BITTERBUSH	2450	

5.3-151

MIL-STD-6016B

FIELD CODING FOR J13.3I

(SHEET 29)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		C3-S-33A TYPE	2451	
		(CONVERTED)		
		C4-S-66A TYPE	2452	
		C4-S-69B TYPE	2453	
		C4-S-A3 TYPE	2454	
		C5-S-75A TYPE	2455	
		CHULYM	2456	
		CPL LOUIS J HAUGE JR	2457	
		DINGHAI	2458	
		DONBA SS	2459	
		FS DESIGN 330	2460	
		GALATI	2461	
		HONGQI	2462	
		ISLES	2463	
		KANARYA	2464	
		KOLOMNA	2465	
		LENINGRADSKY KOMSOMOLETS	2466	
		LSIL	2467	
		NEON ANTONOV	2468	
		NORWALK	2469	
		PT-61	2470	
		SGT MATEJ KOCAK	2471	
		THROSK	2472	
		TREE	2473	
		YANHANG	2474	
		YUNYY PARTIZAN	2475	
		UNDEFINED	2476	THROUGH 2521
		AKL GENERAL	2522	
		ELTANIN	2523	
		KEYLA	2524	
		UNDEFINED	2525	
		LENTA	2526	
		UNDEFINED	2527	
		MP 4	2528	
		MP 6	2529	
		MUNA	2530	
		SEKSTAN	2531	
		TELNOVSK	2532	
		WISTING	2533	
		GORGONA	2534	
		UNDEFINED	2535	THROUGH 2549
		AKR GENERAL	2550	

5.3-152

MIL-STD-6016B

FIELD CODING FOR J13.3I

(SHEET 30)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		ALGOL (SL 7)	2551	
		CALLAGHAN	2552	
		COMET	2553	
		METEOR	2554	
		DISUSED	2555	
		MAINE (CONVERTED)	2556	
		UNDEFINED	2557 THROUGH 2566	
		AFS GENERAL	2567	
		FORT	2568	
		UNDEFINED	2569	
		MARS	2570	
		RESOURCE	2571	
		UNDEFINED	2572 THROUGH 2580	
		AOE GENERAL	2581	
		SACRAMENTO	2582	
		SAGAMI	2583	
		UNDEFINED	2584 THROUGH 2593	
		AD GENERAL	2594	
		YELLOWSTONE	2595	
		SAMUEL GOMPERS	2596	
		DIXIE	2597	
		STALWART	2598	
		UNDEFINED	2599 THROUGH 2608	
		AWW GENERAL	2609	
		UNDEFINED	2610 THROUGH 2619	
		AH GENERAL	2620	
		HAVEN	2621	
		OB	2622	
		DISUSED	2623	
		UNDEFINED	2624 THROUGH 2632	
		AGB GENERAL	2633	
		DOBRYNYA NIKITICH	2634	
		HANSE	2635	
		IVANSUSANIN	2636	
		SHIRASE	2637	
		YANHA	2638	
		UNDEFINED	2639 THROUGH 2648	
		AGBL GENERAL	2649	
		EISVOGEL (TYPE 721)	2650	
		DISUSED	2651	
		UNDEFINED	2652 THROUGH 2661	
		AGI GENERAL	2662	

FIELD CODING FOR J13.3I

(SHEET 31)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		ALPINIST	2663	
		ARMINZA	2664	
		UNDEFINED	2665	
		BALZAM	2666	
		BOLOGOE	2667	
		DISUSED	2668	
		HAM	2669	
		DISUSED	2670	
		DISUSED	2671	
		LENTA	2672	
		MAYAK	2673	
		MIRNYY	2674	
		MOMA	2675	
		NIKOLAY ZUBOV	2676	
		OKEAN	2677	
		DISUSED	2678	
		PAMIR	2679	
		PRIMORYE	2680	
		ALSTER (TYPE 423)	2681	
		UNDEFINED	2682 THROUGH 2705	
		ALS GENERAL	2706	
		UNDEFINED	2707 THROUGH 2716	
		AEM GENERAL	2717	
		AMGA	2718	
		ANDIZHAN (MODIFIED)	2719	
		LAMA	2720	
		MALINA	2721	
		MELITOPOL	2722	
		MP 6	2723	
		UNDEFINED	2724 THROUGH 2733	
		AGM GENERAL	2734	
		AGM-24	2735	
		GEN HOYT S VANDENBERG	2736	
		OBSERVATION ISLAND	2737	
		RANGE SENTINEL	2738	
		(HASKELL TYPE)		
		REDSTONE	2739	
		UNDEFINED	2740 THROUGH 2749	
		AGOR GENERAL	2750	
		ABKHAZIYA	2751	
		AKADEMIK KRYLOV	2752	
		ARAD	2753	

FIELD CODING FOR J13.3I

(SHEET 32)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		BALIKPAPAN	2754	
		BELGICA	2755	
		DISUSED	2756	
		COOK	2757	
		D'ENTRECASTEAUX	2758	
		DOBRYNYA NIKITICH	2759	
		DONG MING	2760	
		ELTANIN	2761	
		ENDEAVOR	2762	
		FRANCESCO NULLO	2763	
		DISUSED	2764	
		GRIGORE ANTIPA	2765	
		GYRE	2766	
		HAYES	2767	
		HECLA	2768	
		MELVILLE	2769	
		MSC 60	2770	
		NAUTILUS	2771	
		NEVELSKOY	2772	
		NIKOLAY ZUBOV	2773	
		PITHEAS	2774	
		POLYUS	2775	
		QUEST	2776	
		ROBERT D CONRAD	2777	
		T-43	2778	
		TRITON	2779	
		TUI	2780	
		TYDEMAN	2781	
		XIANG YANG HONG	2782	
		YANLUN	2783	
		YUG	2784	
		ZENOBE GRAMME	2785	
		MAYAK	2786	
		UNDEFINED	2787 THROUGH 2823	
		AGOB GENERAL	2824	
		POLARSTERN	2825	
		UNDEFINED	2826 THROUGH 2835	
		AGOS GENERAL	2836	
		UNDEFINED	2837 THROUGH 2845	
		AO GENERAL	2846	
		UNDEFINED	2847	
		AKAR	2848	

FIELD CODING FOR J13.3I

(SHEET 33)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		ALBAY BURBAK	2849	
		ALTAY	2850	
		UNDEFINED	2851	
		BASKUNCHAK	2852	
		BAYLEAF	2853	
		BINBASI GURGAN	2854	
		DISUSED	2855	
		CIMARRON	2856	
		CIMARRON (JUMBOISED)	2857	
		DORA	2858	
		HAMANA	2859	
		DISUSED	2860	
		DISUSED	2861	
		HENRY J KAISER	2862	
		IRTYSH	2863	
		KALININGRADNEFT	2864	
		KH0BI	2865	
		KONDA	2866	
		METTAWEE	2867	
		MISPILLION (JUMBOISED)	2868	
		MOSKIT	2869	
		NEOSHO	2870	
		NERCHA	2871	
		NORWEGIAN BOW	2872	
		OLEKMA	2873	
		PATAPSCO	2874	
		PEVEK	2875	
		UNDEFINED	2876	
		SOFIYA	2877	
		SPESSART (TYPE 704A)	2878	
		TASKIZAK	2879	
		USEDOM	2880	
		WALCHENSEE (TYPE 703)	2881	
		WAVE	2882	
		DISUSED	2883	
		YUZBASI TOLUNAY	2884	
		BRAMBLELEAF	2885	
		UNDEFINED	2886	THROUGH 2936
		AOT GENERAL	2937	
		AMERICAN EXPLORER	2938	
		AOTL	2939	
		EBANOL	2940	

FIELD CODING FOR J13.3I

(SHEET 34)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		FULIN	2941	
		FUZHOU	2942	
		GUANZGHOU	2943	
		LEIZHOU	2944	
		MAUMEE	2945	
		METTAWEE	2946	
		MISSION	2947	
		POTOMOC	2948	
		SEALIFT	2949	
		SUAMICO	2950	
		T 5 TYPE	2951	
		TM2	2952	
		PORT VENDRES	2953	
		UNDEFINED	2954 THROUGH 2973	
		AOTL GENERAL	2974	
		DISUSED	2975	
		KH0BI	2976	
		UNDEFINED	2977 THROUGH 2986	
		AOR GENERAL	2987	
		BANDAR ABBAS	2988	
		BEREZINA	2989	
		BORIS CHILIKIN	2990	
		CAPITAN OLA PANTOJA	2991	
		DEEPAK	2992	
		DUBNA	2993	
		DURANCE	2994	
		FUQING	2995	
		KAZBEK	2996	
		KHARG	2997	
		MEERSBURG (TYPE 701C)	2998	
		MESAR	2999	
		OLWEN	3000	
		POOLSTER	3001	
		POLYARNIK	3002	
		PROTECTEUR	3003	
		PROVIDER	3004	
		ROVER	3005	
		SAO GABRIEL	3006	
		STROMBOLI	3007	
		TIDE (IMPROVED)	3008	
		UDA	3009	
		WICHITA	3010	

FIELD CODING FOR J13.3I

(SHEET 35)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		FORT VICTORIA	3011	
		BERLIN (TYPE 702C)	3012	
		UNDEFINED	3013 THROUGH 3042	
		AORL GENERAL	3043	
		LEIZHOU	3044	
		UNDEFINED	3045 THROUGH 3054	
		AOL GENERAL	3055	
		PUNARUU	3056	
		UNDEFINED	3057 THROUGH 3065	
		AGP GENERAL	3066	
		GRAHAM COUNTY	3067	
		NORGE	3068	
		DISUSED	3069	
		MERCUUR	3070	
		UNDEFINED	3071 THROUGH 3079	
		AP GENERAL	3080	
		MIKHAIL KALININ	3081	
		PANDORA	3082	
		QIONGSHA	3083	
		UNDEFINED	3084 THROUGH 3093	
		AGR GENERAL	3094	
		UNDEFINED	3095 THROUGH 3104	
		AOSR GENERAL	3105	
		UNDEFINED	3106 THROUGH 3115	
		AR GENERAL	3116	
		ACHELOUS	3117	
		AJAX	3118	
		AMPHION	3119	
		AMUR	3120	
		ARL I	3121	
		DALIANG	3122	
		DILIGENCE	3123	
		DIXIE	3124	
		JULES VERNE	3125	
		OSKOL	3126	
		RHIN	3127	
		STALWART	3128	
		UNDEFINED	3129 THROUGH 3145	
		ARL GENERAL	3146	
		ARCHELOUS	3147	
		UNDEFINED	3148 THROUGH 3157	
		AGE GENERAL	3158	

5.3-158

MIL-STD-6016B

FIELD CODING FOR J13.3I

(SHEET 36)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		BELGICA	3159	
		BERRY	3160	
		UNDEFINED	3161	
		COMMANDANT RIVIERE	3162	
		DESNA	3163	
		DOBRYNYA NIKITICH	3164	
		EF 3	3165	
		HENRI POINCARE	3166	
		ILE D'OLERON	3167	
		IVANSUSANIN	3168	
		KOLOMNA	3169	
		LENTA	3170	
		MARSHAL NEDELIN	3171	
		MOMA	3172	
		MP-8	3173	
		MUNA	3174	
		NARVIK	3175	
		OS-3	3176	
		POINT LOMA	3177	
		POTOK	3178	
		QUARTO	3179	
		SASHA	3180	
		SIBIR	3181	
		SO-1	3182	
		T-43	3183	
		TRITON	3184	
		DISUSED	3185	
		YAL 01	3186	
		YANXI	3187	
		ROSSETTI	3188	
		DENTI	3189	
		MONGE	3190	
		UNDEFINED	3191 THROUGH 3227	
		ARS GENERAL	3228	
		BOLSTER	3229	
		DISUSED	3230	
		INGUL	3231	
		KATUN I	3232	
		KATUN II	3233	
		KOWAN	3234	
		LSIL 351	3235	
		MIKHAIL RUDNITSKY	3236	

5.3-159

MIL-STD-6016B

FIELD CODING FOR J13.3I

(SHEET 37)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		OREL	3237	
		PAMIR	3238	
		PIAST	3239	
		PROTEO	3240	
		PS-11	3241	
		SAFEGUARD	3242	
		SILVA	3243	
		SPASILAC	3244	
		DISUSED	3245	
		US 149 FT	3246	
		YANDING	3247	
		UNDEFINED	3248 THROUGH 3273	
		ARSD GENERAL	3274	
		UNDEFINED	3275 THROUGH 3284	
		ASVR GENERAL	3285	
		UNDEFINED	3286 THROUGH 3295	
		AOS GENERAL	3296	
		ALATNA	3297	
		LUZA	3298	
		URAL	3299	
		VALA	3300	
		TONTI	3301	
		UNDEFINED	3302 THROUGH 3311	
		AF GENERAL	3312	
		CROITOR	3313	
		DANLIN	3314	
		MAYAK	3315	
		RIEGEL	3316	
		UNDEFINED	3317 THROUGH 3326	
		AKS GENERAL	3327	
		UNDEFINED	3328 THROUGH 3337	
		AKSL GENERAL	3338	
		UNDEFINED	3339 THROUGH 3348	
		AFL GENERAL	3349	
		UNDEFINED	3350 THROUGH 3359	
		ASR GENERAL	3360	
		ANTEO	3361	
		CHANTICLEER	3362	
		DAHIANG	3363	
		DALANG	3364	
		ELBRUS	3365	
		FEHMARN (TYPE 720B)	3366	

FIELD CODING FOR J13.3I

(SHEET 38)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		FUSHIMI	3367	
		GALATI	3368	
		HUDONG	3369	
		KURTARAN	3370	
		NEPA	3371	
		PIGEON	3372	
		PRUT	3373	
		ROSLAVL	3374	
		SPASILAC	3375	
		VALDAY	3376	
		ZHONGHUA	3377	
		UNDEFINED	3378 THROUGH 3401	
		AS GENERAL	3402	
		ACHELOUS	3403	
		AEGIR	3404	
		DISUSED	3405	
		ATREK	3406	
		CHIYODA	3407	
		DADONG	3408	
		DAZHOU	3409	
		DIVER	3410	
		DNEPR	3411	
		DNEPR (MODIFIED)	3412	
		DON	3413	
		EMORY S LAND	3414	
		FULTON	3415	
		HUNLEY	3416	
		L Y SPEAR	3417	
		PROTEUS	3418	
		DISUSED	3419	
		SIMON LAKE	3420	
		UGRA	3421	
		UNDEFINED	3422 THROUGH 3447	
		ASL GENERAL	3448	
		UNDEFINED	3449 THROUGH 3458	
		AGS GENERAL	3459	
		AGS 39 CLASS	3460	
		AKASHI	3461	
		ALMEIDA CARVALHO	3462	
		AMMIRAGLIO MAGNAGHI	3463	
		ANDRIJA MOHOROVICIC	3464	
		AUK	3465	

FIELD CODING FOR J13.3I

(SHEET 39)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		BIYA	3466	
		BOLOGUE	3467	
		UNDEFINED	3468	
		BUYSKES	3469	
		C4-S-A1 TYPE (CONVERTED)	3470	
		CHAUVENET	3471	
		COOK	3472	
		DING HAI	3473	
		FINIK	3474	
		FS DESIGN 330	3475	
		FUTAMI	3476	
		HAMASHIO	3477	
		HEIYO	3478	
		KAIBOKAN I	3479	
		KAIYO	3480	
		KAMENKA	3481	
		DISUSED	3482	
		UNDEFINED	3483	
		L'ESPERANCE	3484	
		UNDEFINED	3485	
		LENTRA	3486	
		LSIL	3487	
		MEIYO	3488	
		MELITOPOL	3489	
		MOMA	3490	
		MONOWAI	3491	
		MORESBY	3492	
		MP-8	3493	
		MSC-294 (BLUEBIRD)	3494	
		NYRYAT I	3495	
		NYRYAT II	3496	
		SAMARA	3497	
		SHOYO	3498	
		SILAS BENT	3499	
		STERNE	3500	
		SUMA	3501	
		T-43	3502	
		TAKUYO	3503	
		TELNOVSK	3504	
		TELNOVSK (MODIFIED)	3505	
		TENYO	3506	
		VICTORY (CONVERTED)	3507	

FIELD CODING FOR J13.3I

(SHEET 40)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		WILKES	3508	
		YANLAI	3509	
		YANXU	3510	
		MIRTO	3511	
		MARS	3512	
		LAPEROUSE	3513	
		UNDEFINED	3514 THROUGH 3579	
		AGSA GENERAL	3580	
		UNDEFINED	3581 THROUGH 3590	
		AGSC GENERAL	3591	
		EXPLORER	3592	
		FLINDERS	3593	
		TAINO	3594	
		BULLDOG	3595	
		ROEBUCK	3596	
		UNDEFINED	3597 THROUGH 3604	
		AX GENERAL	3605	
		ARIS	3606	
		DISUSED	3607	
		JADRAN	3608	
		JERVIS BAY	3609	
		JOSE MARTI	3610	
		MP-8	3611	
		SMOLNY	3612	
		UGRA	3613	
		VIETNAM HEROICO	3614	
		WODNIK	3615	
		UNDEFINED	3616 THROUGH 3630	
		AXL GENERAL	3631	
		UNDEFINED	3632	
		LEOPARD	3633	
		MAYAK	3634	
		UNDEFINED	3635 THROUGH 3642	
		AXS GENERAL	3643	
		AMERIGO VESPUCCI	3644	
		CAROLY	3645	
		CARSARO II	3646	
		GORCH FOCK (TYPE 441A)	3647	
		MIRCEA	3648	
		PALINURO	3649	
		SAGRES	3650	
		STELLA POLARE	3651	

5.3-163

MIL-STD-6016B

FIELD CODING FOR J13.3I

(SHEET 41)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		UNDEFINED	3652 THROUGH 3659	
		AT GENERAL	3660	
		UNDEFINED	3661 THROUGH 3665	
		ATA GENERAL	3666	
		ABNAKI	3667	
		APACHE	3668	
		ARMY 254	3669	
		ATAK	3670	
		ATLANTE	3671	
		AZUMA	3672	
		BELIER	3673	
		UNDEFINED	3674	
		GAJ	3675	
		GNIEWKO	3676	
		GORYN	3677	
		GROMOVOY	3678	
		KUDRET	3679	
		MAITO	3680	
		MB-31	3681	
		MB-65	3682	
		MOTYL	3683	
		OKHTENSKIY	3684	
		ONCU	3685	
		POWHATAN	3686	
		ROSLAVL	3687	
		ROYSTERER	3688	
		SAINT	3689	
		SCHULTZ XAVIER	3690	
		SORUM	3691	
		TENACE	3692	
		TUZHONG	3693	
		TYPHOON	3694	
		WANGEROOGE (TYPE 722B)	3695	
		ZENIT	3696	
		MAITO	3697	
		ARMEN	3698	
		UNDEFINED	3699 THROUGH 3737	
		ATR GENERAL	3738	
		TENACE	3739	
		UNDEFINED	3740 THROUGH 3748	
		ATS GENERAL	3749	
		EDENTON	3750	

FIELD CODING FOR J13.3I

(SHEET 42)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		OKHTENSKY	3751	
		LANGE00G (TYPE 754)	3752	
		ARGUS	3753	
		UNDEFINED	3754 THROUGH 3762	
		AWT GENERAL	3763	
		UNDEFINED	3764	
		BASENTO	3765	
		FUZHOU (MODIFIED)	3766	
		KANGAN	3767	
		LEIZHOU (MODIFIED)	3768	
		LSIL	3769	
		MANYCH	3770	
		MINCIO	3771	
		PIAVE	3772	
		TEVERE	3773	
		ULUBAT	3774	
		VODA	3775	
		YW-83	3776	
		Z	3777	
		UNDEFINED	3778 THROUGH 3797	
		SERVICE CRAFT GENERAL	3798	
		BARGE, GENERAL	3799	
		YO GENERAL	3800	
		YOG GENERAL	3801	
		YHT GENERAL	3802	
		YRNS GENERAL	3803	
		YOS GENERAL	3804	
		YPK GENERAL	3805	
		YRR GENERAL	3806	
		YRB GENERAL	3807	
		YRST GENERAL	3808	
		YOM GENERAL	3809	
		YOSS GENERAL	3810	
		YW GENERAL	3811	
		UNDEFINED	3812 THROUGH 3827	
		YD GENERAL	3828	
		YM GENERAL	3829	
		YFD GENERAL	3830	
		YFP GENERAL	3831	
		YGT GENERAL	3832	
		YR GENERAL	3833	
		UNDEFINED	3834 THROUGH 3840	

FIELD CODING FOR J13.3I

(SHEET 43)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		YFD GENERAL	3841	
		YFDB GENERAL	3842	
		YFDM GENERAL	3843	
		YFDL GENERAL	3844	
		UNDEFINED	3845	THROUGH 3850
		YRD GENERAL	3851	
		YRDB GENERAL	3852	
		YRDM GENERAL	3853	
		YRDL GENERAL	3854	
		UNDEFINED	3855	THROUGH 3861
		LIGHTER GENERAL	3862	
		YE GENERAL	3863	
		YF GENERAL	3864	
		YFC GENERAL	3865	
		YFR GENERAL	3866	
		YC GENERAL	3867	
		YFT GENERAL	3868	
		UNDEFINED	3869	THROUGH 3878
		YT GENERAL	3879	
		YTB GENERAL	3880	
		YTM GENERAL	3881	
		YTL GENERAL	3882	
		UNDEFINED	3883	THROUGH 3892
		YAGF GENERAL	3893	
		YAG GENERAL	3894	
		YV GENERAL	3895	
		YNG GENERAL	3896	
		YP GENERAL	3897	
		YFU GENERAL	3898	
		YAM GENERAL	3899	
		YNC GENERAL	3900	
		YLC GENERAL	3901	
		YVS GENERAL	3902	
		YRG GENERAL	3903	
		YAGT GENERAL	3904	
		YPT GENERAL	3905	
		YRC GENERAL	3906	
		YDT GENERAL	3907	
		YNT GENERAL	3908	
		YH GENERAL	3909	
		YFB GENERAL	3910	
		YTR GENERAL	3911	

FIELD CODING FOR J13.3I

(SHEET 44)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		YFL GENERAL	3912	
		YAC GENERAL	3913	
		YSR GENERAL	3914	
		YSG GENERAL	3915	
		YDG GENERAL	3916	
		KHABAROV	3917	
		UNDEFINED	3918 THROUGH 3936	
		TM GENERAL	3937	
		TMD GENERAL	3938	
		TMB GENERAL	3939	
		TMK GENERAL	3940	
		TMF GENERAL	3941	
		TMC GENERAL	3942	
		TMCS GENERAL	3943	
		TMWW GENERAL	3944	
		TMA GENERAL	3945	
		TMH GENERAL	3946	
		TMGB GENERAL	3947	
		TMI GENERAL	3948	
		TML GENERAL	3949	
		TMOT GENERAL	3950	
		TMM GENERAL	3951	
		TMP GENERAL	3952	
		TMFR GENERAL	3953	
		TMR GENERAL	3954	
		TMOR GENERAL	3955	
		TMOL GENERAL	3956	
		TME GENERAL	3957	
		TMGS GENERAL	3958	
		TMLS GENERAL	3959	
		TMS GENERAL	3960	
		TMOS GENERAL	3961	
		TMO GENERAL	3962	
		TMX GENERAL	3963	
		TMWT GENERAL	3964	
		UNDEFINED	3965 THROUGH 3989	
		TMT GENERAL	3990	
		TMTR GENERAL	3991	
		TMTS GENERAL	3992	
		UNDEFINED	3993 THROUGH 4002	
		TU GENERAL	4003	
		TUF GENERAL	4004	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		TUB GENERAL	4005	
		TUI GENERAL	4006	
		TUR GENERAL	4007	
		TUT GENERAL	4008	
		TUS GENERAL	4009	
		TUC GENERAL	4010	
		TUW GENERAL	4011	
		UNDEFINED	4012 THROUGH 4023	
		TJ GENERAL	4024	
		TJF GENERAL	4025	
		TJC GENERAL	4026	
		TJCS GENERAL	4027	
		TJGB GENERAL	4028	
		UNDEFINED	4029 THROUGH 4038	
		TS GENERAL	4039	
		TSG GENERAL	4040	
		TSR GENERAL	4041	
		UNDEFINED	4042 THROUGH 4052	
		MPS GENERAL	4053	
		UNDEFINED	4054 THROUGH 4069	
		SURFACE SPECIFIC TYPE	4070 THROUGH 4094	
		1-25		
		RESET TO NO STATEMENT	4095	

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J13.3C1
WORD TITLE: SURFACE (MARITIME) COMMAND AND CONTROL STATUS CONTINUATION
WORD

24	23	22:	21:	20	19	18	17	16	15	14:	13:	12	11	10	09	08	07:	06	05	04	03	02:	01	00:
NUMBER OF	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
FIRE	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
CONTROL	:	SP	:	:	:	:	:	:	:	:	SP	:	:	:	:	:	:	:	:	:	:	:	:	:
SYSTEMS	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
AVAILABLE,	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
1	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
4	:	1	:	:	:	:	7	:	:	:	1	:	:	6	:	:	:	:	5	:	:	:	2	:
49	48	47	46	45:	44	43	42	41:	40:	39	38	37	36	35	34	33:	32:	31	30	29	28	27	26:	25
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
MISSILE TYPE, 3	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
6	:	:	:	:	:	4	:	:	1	:	:	:	7	:	:	:	1	:	:	6	:	:	:	:
69	68:	67	66	65:	64:	63	62	61	60:	59:	58	57	56	55	54	53	52:	51:	50	:	:	:	:	:
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
:	SP	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
:	2	:	:	3	:	1	:	:	4	:	1	:	:	:	7	:	:	:	1	:	:	:	:	:

WORD DESCRIPTION

WORD NUMBER: J13.3C1

WORD TITLE: SURFACE (MARITIME) COMMAND AND CONTROL STATUS CONTINUATION
WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	01
1551	001	CONTINUATION WORD LABEL	2-	6 5	00001
399	004	MISSILE TYPE, 1	7-	12 6	
756	001	SPARE (SP)	13	1	
408	037	OPERATIONAL MISSILE INVENTORY, 1	14-	20 7	
756	001	SPARE (SP)	21	1	
396	001	NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 1	22-	25 4	
399	005	MISSILE TYPE, 2	26-	31 6	SAME CODING AS FOR BITS 7-12.
756	001	SPARE (SP)	32	1	
408	038	OPERATIONAL MISSILE INVENTORY, 2	33-	39 7	SAME CODING AS FOR BITS 14-20.
756	001	SPARE (SP)	40	1	
396	002	NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 2	41-	44 4	SAME CODING AS FOR BITS 22-25.
399	006	MISSILE TYPE, 3	45-	50 6	SAME CODING AS FOR BITS 7-12.
756	001	SPARE (SP)	51	1	
408	039	OPERATIONAL MISSILE INVENTORY, 3	52-	58 7	SAME CODING AS FOR BITS 14-20.
756	001	SPARE (SP)	59	1	
396	003	NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 3	60-	63 4	SAME CODING AS FOR BITS 22-25.
806	001	FUEL FUNCTION (FL FCT)	64	1	
409	001	FUEL, SURFACE (MARITIME)	65-	67 3	
756	002	SPARE (SP)	68-	69 2	

FIELD CODING FOR J13.3C1

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
399	004	MISSILE TYPE, 1 -----		INDICATES THE TYPE OF MISSILE BEING REPORTED.
		NO STATEMENT	0	
		SHORT RANGE SAM	1	RANGE LESS THAN 10 NM.
		MEDIUM RANGE SAM	2	RANGE 10-50 NM.
		LONG RANGE SAM	3	RANGE GREATER THAN 50 NM.
		SHORT RANGE SSM	4	RANGE LESS THAN 15 NM.
		MEDIUM RANGE SSM	5	RANGE 15-75 NM.
		LONG RANGE SSM	6	RANGE GREATER THAN 75 NM.
		UNDEFINED	7	
		SM2(ER)	8	A LONG RANGE SAM.
		SM2(MR)	9	A MEDIUM RANGE SAM.
		SM1(ER)	10	A MEDIUM RANGE SAM.
		SM1(MR)	11	A MEDIUM RANGE SAM.
		EXTENDED RANGE SAM (SHORT)	12	RANGE 51 THROUGH 99 NM.
		EXTENDED RANGE SAM (MEDIUM)	13	RANGE 100 THROUGH 150 NM.
		EXTENDED RANGE SAM (LONG)	14	RANGE GREATER THAN 150 NM.
		EXTENDED RANGE SSM (SHORT)	15	RANGE 76 THROUGH 199 NM.
		EXTENDED RANGE SSM (MEDIUM)	16	RANGE 200 THROUGH 300 NM.
		EXTENDED RANGE SSM (LONG)	17	RANGE GREATER THAN 300 NM.
		SM2 BLOCK II	18	AN EXTENDED RANGE SAM (SHORT).
		SM2 BLOCK III	19	AN EXTENDED RANGE SAM (SHORT).
		SM2 BLOCK IIIA	20	AN EXTENDED RANGE SAM (SHORT).
		SM2 BLOCK IIIB	21	AN EXTENDED RANGE SAM (SHORT).
		SM2 BLOCK IV	22	AN EXTENDED RANGE SAM (MEDIUM).
		SM2 BLOCK IVA	23	AN ANTI-THEATER BALLISTIC MISSILE (TBM) CAPABLE EXTENDED RANGE SAM (LONG).
		TOMAHAWK (TASM)	24	A LONG RANGE SSM TACTICAL ANTI- SHIP MISSILE.
		TOMAHAWK (TLAM C)	25	A LONG RANGE SSM TACTICAL LAND ATTACK MISSILE CONVENTIONAL.
		HARPOON	26	A MEDIUM RANGE SSM.
		SM3 (LEAP)	27	LIGHT EXOATMOSPHERIC PROJECTILE - AN ANTI-TBM MISSILE (EXTENDED RANGE (LONG)).
		UNDEFINED	28 THROUGH 56	
		MISSILE 1 THROUGH 7	57 THROUGH 63	AS SPECIFIED BY THE OPERATIONAL COMMANDER.

FIELD CODING FOR J13.3C1

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
408	037	OPERATIONAL MISSILE INVENTORY, 1 ----- 0 THROUGH 125 MISSILES GREATER THAN 125 MISSILES NO STATEMENT	0 THROUGH 125 126 127	USED IN CONJUNCTION WITH THE MISSILE TYPE FIELD IT AMPLIFIES. AN ESTIMATED AMOUNT OF OPERATIONAL MISSILES OF THE SPECIFIED TYPE REMAINING ON THE WEAPON SYSTEM. IN ONE MISSILE INCREMENTS.
396	001	NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 1 ----- 0 THROUGH 13 SYSTEMS GREATER THAN 13 SYSTEMS NO STATEMENT	0 THROUGH 13 14 15	USED IN CONJUNCTION WITH THE MISSILE TYPE FIELD IT AMPLIFIES. SPECIFIES THE NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE FOR THE MISSILE TYPE SPECIFIED. IN INCREMENTS OF ONE.
806	001	FUEL FUNCTION ----- BURNABLE FUEL OFF-LOAD FUEL	0 1	USED IN CONJUNCTION WITH THE FUEL FIELD TO INDICATE EITHER BURNABLE OR OFF-LOAD FUEL. INDICATES THAT THE FUEL SPECIFIED IN THE FUEL FIELD IS AVAILABLE FOR TRANSFER.
409	001	FUEL, SURFACE (MARITIME) ----- NO STATEMENT 0 THROUGH 30 PERCENT 31 PERCENT THROUGH 40 PERCENT 41 PERCENT THROUGH 50 PERCENT 51 PERCENT THROUGH 60 PERCENT 61 PERCENT THROUGH 70 PERCENT 71 PERCENT THROUGH 85 PERCENT 86 PERCENT THROUGH 100 PERCENT	0 1 2 3 4 5 6 7	THE CURRENT AMOUNT OF FUEL REMAINING ON BOARD AS A PERCENTAGE OF TOTAL CAPACITY.

WORD TITLE: SURFACE (MARITIME) EQUIPMENT STATUS CONTINUATION WORD

[illegible][illegible]

WORD DESCRIPTION

WORD NUMBER: J13.3C2

WORD TITLE: SURFACE (MARITIME) EQUIPMENT STATUS CONTINUATION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	01
1551	001	CONTINUATION WORD LABEL	2-	6 5	00010
1665	016	COMMAND AND CONTROL SYSTEM (C2 SYS)	7-	8 2	
1665	017	DATA LINK AND DISPLAY SYSTEM (DL SYS)	9-	10 2	
1665	018	NAVIGATION SYSTEM (NAV SYS)	11-	12 2	
1665	019	COMMUNICATION SYSTEM (COMM SYS)	13-	14 2	
1665	020	SURFACE SEARCH RADAR (SS RAD)	15-	16 2	
1665	021	2D AIR SEARCH RADAR (2D RAD)	17-	18 2	
1665	022	3D AIR SEARCH RADAR (3D RAD)	19-	20 2	
1665	023	PRECISION APPROACH RADAR (PAP RAD)	21-	22 2	
1665	024	IFF/SIF INTERROGATOR AND TRANSPONDER SYSTEM (IFF SIF)	23-	24 2	
1665	025	SONAR SYSTEM (SON)	25-	26 2	
1665	026	ELECTRONIC ATTACK (EA)	27-	28 2	
1665	027	ELECTRONIC WARFARE SUPPORT AND OTHER ELECTRONIC ATTACK (ES)	29-	30 2	
1665	028	GUN FIRE CONTROL SYSTEM (GFCS)	31-	32 2	
1665	029	GUNS	33-	34 2	
1665	030	MISSILE, ROCKET, AND LAUNCHERS (MISS RKT)	35-	36 2	
1665	031	CRUISE MISSILES (CRU MISS)	37-	38 2	
1665	032	EMBARKED ASSAULT CRAFT (ASLT CFT)	39-	40 2	
1665	033	ENERGY GENERATION SYSTEM- NUCLEAR (GEN NUC)	41-	42 2	
1665	034	ENERGY GENERATION SYSTEM- CONVENTIONAL (GEN CONV)	43-	44 2	
1665	058	TOMAHAWK WEAPON CONTROL SYSTEM (TWCS)	45-	46 2	
1665	059	HARPOON WEAPON CONTROL SYSTEM (HWCS)	47-	48 2	
756	001	SPARE (SP)	49	1	
1665	035	AIRCRAFT HANDLING, LAUNCH, AND RECOVERY SYSTEMS (A/C HAND)	50-	51 2	
1665	036	FIGHTER AIRCRAFT (FTR A/C)	52-	53 2	

WORD DESCRIPTION

WORD NUMBER: J13.3C2

WORD TITLE: SURFACE (MARITIME) EQUIPMENT STATUS CONTINUATION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1665 037		ATTACK, STRIKE/FIGHTER AIRCRAFT (ATK A/C)	54-	55 2	
1665 038		FIXED WING ANTI-SUBMARINE WARFARE AIRCRAFT (ASW A/C)	56-	57 2	
1665 039		HELICOPTER ANTI-SUBMARINE WARFARE AIRCRAFT (HELO ASW)	58-	59 2	
1665 040		AIRBORNE EARLY WARNING AIRCRAFT (AEW A/C)	60-	61 2	
1665 041		ELECTRONIC SUPPORT AIRCRAFT (ELEC SUP)	62-	63 2	
1665 042		TANKER AIRCRAFT (TNKR A/C)	64-	65 2	
1665 043		HELICOPTER SUPPORT AIRCRAFT (HELO SUP)	66-	67 2	
756 002		SPARE (SP)	68-	69 2	

FIELD CODING FOR J13.3C2

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1665	016	COMMAND AND CONTROL SYSTEM -----		INDICATES THE STATUS OF DATA DISPLAY GROUP, DATA PROCESSING EQUIPMENT, DIGITAL DATA SWITCHBOARDS, INTERFACE EQUIPMENT, DIGITAL DATA COMMUNICATIONS, COMMAND AND CONTROL TESTING, AND COMMAND AND CONTROL ANALOG SWITCHBOARDS.
		NO STATEMENT	0	
		DEGRADED	1	PARTIALLY OPERATIONAL.
		NOT OPERATIONAL	2	
		OPERATIONAL	3	
1665	017	DATA LINK AND DISPLAY SYSTEM -----		INDICATES THE STATUS OF ALL DATA LINK AND VISUAL DISPLAY COMPONENTS AND RELATED SYSTEMS.
		NO STATEMENT	0	
		DEGRADED	1	PARTIALLY OPERATIONAL.
		NOT OPERATIONAL	2	
		OPERATIONAL	3	
1665	018	NAVIGATION SYSTEM -----		INDICATES THE STATUS OF A UNIT'S ELECTRONIC AND ELECTRICAL NAVIGATION AIDS, RADIO, ACOUSTICAL, OPTICAL, COMPASS, AND INERTIAL NAVIGATION SYSTEMS.
		NO STATEMENT	0	
		DEGRADED	1	PARTIALLY OPERATIONAL.
		NOT OPERATIONAL	2	
		OPERATIONAL	3	
1665	019	COMMUNICATION SYSTEM -----		INDICATES THE STATUS OF RADIOS, UNDERWATER, VISUAL, AUDIBLE, TELEMETRY, TELETYPE, FACSIMILE, AND ALL SATELLITE COMMUNICATIONS RELATED SYSTEMS AND TELECOMMUNICATIONS SECURITY EQUIPMENT.
		NO STATEMENT	0	
		DEGRADED	1	PARTIALLY OPERATIONAL.
		NOT OPERATIONAL	2	
		OPERATIONAL	3	
1665	020	SURFACE SEARCH RADAR -----		INDICATES THE STATUS OF SEARCH AND NAVIGATIONAL RADAR AND THEIR COMPONENTS.

FIELD CODING FOR J13.3C2

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1665	020	SURFACE SEARCH RADAR -----	(CONTINUED)	
		NO STATEMENT	0	
		DEGRADED	1	PARTIALLY OPERATIONAL.
		NOT OPERATIONAL	2	
		OPERATIONAL	3	
1665	021	2D AIR SEARCH RADAR -----		INDICATES THE STATUS OF TWO- DIMENSIONAL AIR SEARCH RADAR AND THEIR COMPONENTS.
		NO STATEMENT	0	
		DEGRADED	1	PARTIALLY OPERATIONAL.
		NOT OPERATIONAL	2	
		OPERATIONAL	3	
1665	022	3D AIR SEARCH RADAR -----		INDICATES THE STATUS OF THREE- DIMENSIONAL AIR SEARCH RADAR AND THEIR COMPONENTS.
		NO STATEMENT	0	
		DEGRADED	1	PARTIALLY OPERATIONAL.
		NOT OPERATIONAL	2	
		OPERATIONAL	3	
1665	023	PRECISION APPROACH RADAR -----		INDICATES THE STATUS OF PRECISION APPROACH RADAR AND THEIR COMPONENTS.
		NO STATEMENT	0	
		DEGRADED	1	PARTIALLY OPERATIONAL.
		NOT OPERATIONAL	2	
		OPERATIONAL	3	
1665	024	IFF/SIF INTERROGATOR AND TRANSPONDER SYSTEM -----		INDICATES THE STATUS OF THE IFF/SIF TRANSPONDER AND INTERROGATOR, INCLUDING MODE 4 AND THE IDENTIFICATION SYSTEM.
		NO STATEMENT	0	
		DEGRADED	1	PARTIALLY OPERATIONAL.
		NOT OPERATIONAL	2	
		OPERATIONAL	3	
1665	025	SONAR SYSTEM -----		INDICATES THE STATUS OF ACTIVE, PASSIVE, AND CLASSIFICATION SONARS. INCLUDES HULL MOUNTED, VARIABLE DEPTH SONAR, PASSIVE ARRAY SYSTEMS, AND ACOUSTIC

FIELD CODING FOR J13.3C2

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1665	025	SONAR SYSTEM -----	(CONTINUED)	
		NO STATEMENT	0	ANALYSIS AND DISPLAY SYSTEMS.
		DEGRADED	1	PARTIALLY OPERATIONAL.
		NOT OPERATIONAL	2	
		OPERATIONAL	3	
1665	026	ELECTRONIC ATTACK -----		INDICATES THE STATUS OF ELECTRONIC ATTACK, ELECTRONIC PROTECTION, ACTIVE AND PASSIVE SYSTEMS.
		NO STATEMENT	0	
		DEGRADED	1	PARTIALLY OPERATIONAL.
		NOT OPERATIONAL	2	
		OPERATIONAL	3	
1665	027	ELECTRONIC WARFARE SUPPORT AND OTHER ELECTRONIC ATTACK -----		INDICATES THE STATUS OF ELECTRONIC WARFARE SUPPORT AND ACOUSTIC WARFARE SYSTEMS. INCLUDES ACM, ACCM, ACSM, MECHANICAL EQUIPMENT, PASSIVE EQUIPMENT, DEGAUSSING EQUIPMENT, AND MINE COUNTERMEASURES SYSTEMS.
		NO STATEMENT	0	
		DEGRADED	1	PARTIALLY OPERATIONAL.
		NOT OPERATIONAL	2	
		OPERATIONAL	3	
1665	028	GUN FIRE CONTROL SYSTEM -----		INDICATES THE STATUS OF THE GUN FIRE CONTROL SYSTEM. INCLUDES SIGHTS, DIRECTORS, STABILIZER AND FIRE CONTROL/TARGET TRACKING EQUIPMENT, BUT NOT THE AMMUNITION OR GUN.
		NO STATEMENT	0	
		DEGRADED	1	PARTIALLY OPERATIONAL.
		NOT OPERATIONAL	2	
		OPERATIONAL	3	
1665	029	GUNS ----		INDICATES THE STATUS OF THE GUNS, BARRELS, MOUNTS, AND CARRIAGES.
		NO STATEMENT	0	
		DEGRADED	1	PARTIALLY OPERATIONAL.
		NOT OPERATIONAL	2	
		OPERATIONAL	3	

FIELD CODING FOR J13.3C2

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1665	030	MISSILE, ROCKET, AND LAUNCHERS -----		INDICATES THE STATUS OF MISSILES AND ROCKETS OTHER THAN SURFACE-TO-AIR AND CRUISE MISSILES. INCLUDES THE LAUNCHER, CRADLE, DEFLECTORS, ETC., FOR THESE WEAPONS.
		NO STATEMENT	0	
		DEGRADED	1	PARTIALLY OPERATIONAL.
		NOT OPERATIONAL	2	
		OPERATIONAL	3	
1665	031	CRUISE MISSILES -----		INDICATES THE STATUS OF CRUISE MISSILES, INCLUDING TOMAHAWK AND HARPOON.
		NO STATEMENT	0	
		DEGRADED	1	PARTIALLY OPERATIONAL.
		NOT OPERATIONAL	2	
		OPERATIONAL	3	
1665	032	EMBARKED ASSAULT CRAFT -----		INDICATES THE STATUS OF ASSAULT CRAFT EMBARKED.
		NO STATEMENT	0	
		DEGRADED	1	PARTIALLY OPERATIONAL.
		NOT OPERATIONAL	2	
		OPERATIONAL	3	
1665	033	ENERGY GENERATION SYSTEM- NUCLEAR -----		INDICATES THE STATUS OF THE NUCLEAR ENERGY GENERATION SYSTEM. INCLUDES THE REACTOR PLANT, COOLANT CONTROLS, INSTRUMENTATION, AND SHIELDING.
		NO STATEMENT	0	
		DEGRADED	1	PARTIALLY OPERATIONAL.
		NOT OPERATIONAL	2	
		OPERATIONAL	3	
1665	034	ENERGY GENERATION SYSTEM- CONVENTIONAL -----		INDICATES THE STATUS OF THE NON- NUCLEAR ENERGY GENERATION SYSTEM. INCLUDES PROPULSION BOILERS, GAS GENERATORS, MAIN PROPULSION BATTERIES, AND MAIN PROPULSION FUEL CELLS.
		NO STATEMENT	0	
		DEGRADED	1	PARTIALLY OPERATIONAL.
		NOT OPERATIONAL	2	
		OPERATIONAL	3	

FIELD CODING FOR J13.3C2

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1665	058	TOMAHAWK WEAPON CONTROL SYSTEM -----		DESCRIBES THE OPERATIONAL STATUS OF THE WEAPON CONTROL SYSTEM.
		NO STATEMENT	0	
		DEGRADED	1	PARTIALLY OPERATIONAL.
		NOT OPERATIONAL	2	
		OPERATIONAL	3	
1665	059	HARPOON WEAPON CONTROL SYSTEM -----		DESCRIBES THE OPERATIONAL STATUS OF THE WEAPON CONTROL SYSTEM.
		NO STATEMENT	0	
		DEGRADED	1	PARTIALLY OPERATIONAL.
		NOT OPERATIONAL	2	
		OPERATIONAL	3	
1665	035	AIRCRAFT HANDLING, LAUNCH, AND RECOVERY SYSTEMS -----		INDICATES THE STATUS OF SYSTEMS RELATED TO AIRCRAFT HANDLING. INCLUDES LAUNCH SUPPORT SYSTEMS: CATAPULTS, BLAST DEFLECTORS, HOLDBACK GEAR; RECOVERY SUPPORT SYSTEMS: ARRESTING GEAR, BARRICADE, LSO PLATFORM; AND OTHER AIRCRAFT SUPPORT SYSTEMS: CRANES, HOISTS, ELEVATORS, STANCHIONS.
		NO STATEMENT	0	
		DEGRADED	1	PARTIALLY OPERATIONAL.
		NOT OPERATIONAL	2	
		OPERATIONAL	3	
1665	036	FIGHTER AIRCRAFT -----		INDICATES THE FULL MISSION CAPABLE AVAILABILITY OF AIRCRAFT WHOSE MISSION IS FIGHTER OR INTERCEPTOR.
		NO STATEMENT	0	
		DEGRADED	1	PARTIALLY OPERATIONAL.
		NOT OPERATIONAL	2	
		OPERATIONAL	3	
1665	037	ATTACK, STRIKE/FIGHTER AIRCRAFT -----		INDICATES THE FULL MISSION CAPABLE AVAILABILITY OF AIRCRAFT WHOSE MISSION IS ATTACK OR COMBINED FIGHTER ATTACK.
		NO STATEMENT	0	
		DEGRADED	1	PARTIALLY OPERATIONAL.
		NOT OPERATIONAL	2	
		OPERATIONAL	3	

5.3-181

MIL-STD-6016B

FIELD CODING FOR J13.3C2

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1665	038	FIXED WING ANTI-SUBMARINE WARFARE AIRCRAFT -----		INDICATES THE FULL MISSION CAPABLE AVAILABILITY OF FIXED WING AIRCRAFT WHOSE MISSION IS ASW.
		NO STATEMENT	0	
		DEGRADED	1	PARTIALLY OPERATIONAL.
		NOT OPERATIONAL	2	
		OPERATIONAL	3	
1665	039	HELICOPTER ANTI-SUBMARINE WARFARE AIRCRAFT -----		INDICATES THE FULL MISSION CAPABLE AVAILABILITY OF HELICOPTER AIRCRAFT WHOSE MISSION IS ASW.
		NO STATEMENT	0	
		DEGRADED	1	PARTIALLY OPERATIONAL.
		NOT OPERATIONAL	2	
		OPERATIONAL	3	
1665	040	AIRBORNE EARLY WARNING AIRCRAFT -----		INDICATES THE FULL MISSION CAPABLE AVAILABILITY OF AIRCRAFT WHOSE MISSION IS AIRBORNE EARLY WARNING.
		NO STATEMENT	0	
		DEGRADED	1	PARTIALLY OPERATIONAL.
		NOT OPERATIONAL	2	
		OPERATIONAL	3	
1665	041	ELECTRONIC SUPPORT AIRCRAFT -----		INDICATES THE FULL MISSION CAPABLE AVAILABILITY OF AIRCRAFT WHOSE MISSION IS ELECTRONICS SUPPORT.
		NO STATEMENT	0	
		DEGRADED	1	PARTIALLY OPERATIONAL.
		NOT OPERATIONAL	2	
		OPERATIONAL	3	
1665	042	TANKER AIRCRAFT -----		INDICATES THE FULL MISSION CAPABLE AVAILABILITY OF AIRCRAFT WHOSE MISSION IS TANKING.
		NO STATEMENT	0	
		DEGRADED	1	PARTIALLY OPERATIONAL.
		NOT OPERATIONAL	2	
		OPERATIONAL	3	
1665	043	HELICOPTER SUPPORT AIRCRAFT -----		INDICATES THE FULL MISSION CAPABLE AVAILABILITY OF HELICOPTER WHOSE MISSION IS OTHER THAN ASW.
		NO STATEMENT	0	
		DEGRADED	1	PARTIALLY OPERATIONAL.

FIELD CODING FOR J13.3C2 (SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1665	043	HELICOPTER SUPPORT AIRCRAFT	(CONTINUED)	

		NOT OPERATIONAL	2	
		OPERATIONAL	3	

WORD TITLE: SURFACE (MARITIME) ELECTRONIC WARFARE STATUS CONTINUATION
WORD

[illegible][illegible]

WORD DESCRIPTION

WORD NUMBER: J13.3C3

WORD TITLE: SURFACE (MARITIME) ELECTRONIC WARFARE STATUS CONTINUATION
WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC	
1550	001	WORD FORMAT	0-	1	2	01
1551	001	CONTINUATION WORD LABEL	2-	6	5	00011
268	001	ES FREQUENCY BAND A (ES A)	7-	8	2	
268	002	ES FREQUENCY BAND B (ES B)	9-	10	2	
268	003	ES FREQUENCY BAND C (ES C)	11-	12	2	
268	004	ES FREQUENCY BAND D (ES D)	13-	14	2	
268	005	ES FREQUENCY BAND E (ES E)	15-	16	2	
268	006	ES FREQUENCY BAND F (ES F)	17-	18	2	
268	007	ES FREQUENCY BAND G (ES G)	19-	20	2	
268	008	ES FREQUENCY BAND H (ES H)	21-	22	2	
268	009	ES FREQUENCY BAND I (ES I)	23-	24	2	
268	010	ES FREQUENCY BAND J (ES J)	25-	26	2	
268	011	ES FREQUENCY BAND K (ES K)	27-	28	2	
268	012	ES FREQUENCY BAND L (ES L)	29-	30	2	
268	013	ES FREQUENCY BAND M (ES M)	31-	32	2	
268	014	HF DIRECTION FINDER (HF DF)	33-	34	2	
268	015	VHF DIRECTION FINDER (VHF DF)	35-	36	2	
268	016	UHF DIRECTION FINDER (UHF DF)	37-	38	2	
272	001	EA FREQUENCY BAND A (EA A)	39-	40	2	
272	002	EA FREQUENCY BAND B (EA B)	41-	42	2	
272	003	EA FREQUENCY BAND C (EA C)	43-	44	2	
272	004	EA FREQUENCY BAND D (EA D)	45-	46	2	
272	005	EA FREQUENCY BAND E (EA E)	47-	48	2	
272	006	EA FREQUENCY BAND F (EA F)	49-	50	2	
272	007	EA FREQUENCY BAND G (EA G)	51-	52	2	
272	008	EA FREQUENCY BAND H (EA H)	53-	54	2	
272	009	EA FREQUENCY BAND I (EA I)	55-	56	2	
272	010	EA FREQUENCY BAND J (EA J)	57-	58	2	
272	011	EA FREQUENCY BAND K (EA K)	59-	60	2	
272	012	EA FREQUENCY BAND L (EA L)	61-	62	2	
272	013	EA FREQUENCY BAND M (EA M)	63-	64	2	
272	014	DECOY, CHAFF	65-	66	2	
272	015	DECOY, IR	67-	68	2	
756	001	SPARE (SP)	69		1	

FIELD CODING FOR J13.3C3

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
268	001	ES FREQUENCY BAND A -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 0 THROUGH 250 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	002	ES FREQUENCY BAND B -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 250 THROUGH 500 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	003	ES FREQUENCY BAND C -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 500 THROUGH 1000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	004	ES FREQUENCY BAND D -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 1000 THROUGH 2000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	005	ES FREQUENCY BAND E -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 2000 THROUGH 3000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).

FIELD CODING FOR J13.3C3

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
268	006	ES FREQUENCY BAND F -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 3000 THROUGH 4000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	007	ES FREQUENCY BAND G -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 4000 THROUGH 6000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	008	ES FREQUENCY BAND H -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 6000 THROUGH 8000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	009	ES FREQUENCY BAND I -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 8000 THROUGH 10,000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	010	ES FREQUENCY BAND J -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 10,000 THROUGH 20,000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).

FIELD CODING FOR J13.3C3

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
268	011	ES FREQUENCY BAND K -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 20,000 THROUGH 40,000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	012	ES FREQUENCY BAND L -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 40,000 THROUGH 60,000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	013	ES FREQUENCY BAND M -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 60,000 THROUGH 100,000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	014	HF DIRECTION FINDER -----		INDICATES THE STATUS OF DIRECTION FINDER EQUIPMENT IN THE HF RANGE.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	015	VHF DIRECTION FINDER -----		INDICATES THE STATUS OF DIRECTION FINDER EQUIPMENT IN THE VHF RANGE.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	016	UHF DIRECTION FINDER -----		INDICATES THE STATUS OF DIRECTION FINDER EQUIPMENT IN THE UHF RANGE.

FIELD CODING FOR J13.3C3

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
268	016	UHF DIRECTION FINDER -----	(CONTINUED)	
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
272	001	EA FREQUENCY BAND A -----		INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 0 THROUGH 250 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
272	002	EA FREQUENCY BAND B -----		INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 250 THROUGH 500 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
272	003	EA FREQUENCY BAND C -----		INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 500 THROUGH 1000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
272	004	EA FREQUENCY BAND D -----		INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 1000 THROUGH 2000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).

5.3-189

MIL-STD-6016B

FIELD CODING FOR J13.3C3

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
272	005	EA FREQUENCY BAND E -----		INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 2000 THROUGH 3000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
272	006	EA FREQUENCY BAND F -----		INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 3000 THROUGH 4000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
272	007	EA FREQUENCY BAND G -----		INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 4000 THROUGH 6000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
272	008	EA FREQUENCY BAND H -----		INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 6000 THROUGH 8000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
272	009	EA FREQUENCY BAND I -----		INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 8000 THROUGH 10,000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).

FIELD CODING FOR J13.3C3

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
272	010	EA FREQUENCY BAND J -----		INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 10,000 THROUGH 20,000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
272	011	EA FREQUENCY BAND K -----		INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 20,000 THROUGH 40,000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
272	012	EA FREQUENCY BAND L -----		INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 40,000 THROUGH 60,000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
272	013	EA FREQUENCY BAND M -----		INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 60,000 THROUGH 100,000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
272	014	DECOY, CHAFF -----		INDICATES THE STATUS OF THE DECOY CHAFF.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).

FIELD CODING FOR J13.3C3 (SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
272	015	DECOY, IR -----		INDICATES THE STATUS OF THE INFRARED DECOY.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J13.3C4

WORD TITLE: COMMUNICATIONS STATUS CONTINUATION WORD

24	23	22	21:	20	19	18	17	16	15	14:	13	12	11	10	09	08	07:	06	05	04	03	02:	01	00:			
<---				:	VOICE GROUP B CHANNEL							:	VOICE GROUP A CHANNEL							:	CONTINUATION WORD LABEL				:	WORD	:
				:								:								:					:	FORMAT	:
				:	7							:	7							:	5				:	2	:

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

SPARE

49																							
----	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				

WORD DESCRIPTION

WORD NUMBER: J13.3C4
WORD TITLE: COMMUNICATIONS STATUS CONTINUATION WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	00100
417 002	VOICE GROUP A CHANNEL	7-	13 7	
417 003	VOICE GROUP B CHANNEL	14-	20 7	
756 049	SPARE	21-	69 49	

FIELD CODING FOR J13.3C4 (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
417	002	VOICE GROUP A CHANNEL -----		INDICATES THE JTIDS/MIDS VOICE GROUP A CHANNEL ON WHICH THE REFERENCE TN IS ASSIGNED TO OPERATE.
		NUMERIC	0 THROUGH 127	128 CHANNELS FROM 0-127.
417	003	VOICE GROUP B CHANNEL -----		INDICATES THE JTIDS/MIDS VOICE GROUP B CHANNEL ON WHICH THE REFERENCE TN IS ASSIGNED TO OPERATE.
		NUMERIC	0 THROUGH 127	128 CHANNELS FROM 0-127.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J13.3C5
WORD TITLE: FIRST ADDITIONAL SURFACE (MARITIME) MISSILE STATUS
CONTINUATION WORD

24	23	22:	21:	20	19	18	17	16	15	14:	13:	12	11	10	09	08	07:	06	05	04	03	02:	01	00:					
NUMBER OF FIRE		:	:							:	:							:							:	:			
CONTROL SYSTEMS AVAILABLE, 4		:	SP	:	OPERATIONAL MISSILE INVENTORY, 4						:	SP	:	MISSILE TYPE, 4						:	CONTINUATION WORD LABEL						:	WORD FORMAT	
4		:	1	:	7						:	1	:	6						:	5						:	2	:
49	48	47	46	45:	44	43	42	41:	40:	39	38	37	36	35	34	33:	32:	31	30	29	28	27	26:	25					
MISSILE TYPE, 6				:	NUMBER OF FIRE				:	:							:	:							:	:			
				:	CONTROL SYSTEMS AVAILABLE, 5				:	SP	:	OPERATIONAL MISSILE INVENTORY, 5						:	SP	:	MISSILE TYPE, 5						:	----	>
				:					:	:							:	:							:	:			
				:					:	:							:	:							:	:			
6				:	4				:	1	:	7						:	1	:	6						:	:	
				:	69	68	67	66	65	64:	63	62	61	60:	59:	58	57	56	55	54	53	52:	51:	50					
				:	SPARE						:	NUMBER OF FIRE						:	:	OPERATIONAL MISSILE INVENTORY, 6						:	:		
				:							:	CONTROL SYSTEMS AVAILABLE, 6						:	SP	:							:	----	>
				:	6						:	4						:	1	:	7						:	1	:

WORD DESCRIPTION

WORD NUMBER: J13.3C5

WORD TITLE: FIRST ADDITIONAL SURFACE (MARITIME) MISSILE STATUS
CONTINUATION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	01
1551	001	CONTINUATION WORD LABEL	2-	6 5	00101
399	007	MISSILE TYPE, 4	7-	12 6	
756	001	SPARE (SP)	13	1	
408	044	OPERATIONAL MISSILE INVENTORY, 4	14-	20 7	
756	001	SPARE (SP)	21	1	
396	004	NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 4	22-	25 4	
399	008	MISSILE TYPE, 5	26-	31 6	SAME CODING AS FOR BITS 7-12.
756	001	SPARE (SP)	32	1	
408	045	OPERATIONAL MISSILE INVENTORY, 5	33-	39 7	SAME CODING AS FOR BITS 14-20.
756	001	SPARE (SP)	40	1	
396	005	NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 5	41-	44 4	SAME CODING AS FOR BITS 22-25.
399	009	MISSILE TYPE, 6	45-	50 6	SAME CODING AS FOR BITS 7-12.
756	001	SPARE (SP)	51	1	
408	046	OPERATIONAL MISSILE INVENTORY, 6	52-	58 7	SAME CODING AS FOR BITS 14-20.
756	001	SPARE (SP)	59	1	
396	006	NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 6	60-	63 4	SAME CODING AS FOR BITS 22-25.
756	006	SPARE	64-	69 6	

FIELD CODING FOR J13.3C5

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
399	007	MISSILE TYPE, 4 -----		INDICATES THE TYPE OF MISSILE BEING REPORTED.
		NO STATEMENT	0	
		SHORT RANGE SAM	1	RANGE LESS THAN 10 NM.
		MEDIUM RANGE SAM	2	RANGE 10-50 NM.
		LONG RANGE SAM	3	RANGE GREATER THAN 50 NM.
		SHORT RANGE SSM	4	RANGE LESS THAN 15 NM.
		MEDIUM RANGE SSM	5	RANGE 15-75 NM.
		LONG RANGE SSM	6	RANGE GREATER THAN 75 NM.
		UNDEFINED	7	
		SM2(ER)	8	A LONG RANGE SAM.
		SM2(MR)	9	A MEDIUM RANGE SAM.
		SM1(ER)	10	A MEDIUM RANGE SAM.
		SM1(MR)	11	A MEDIUM RANGE SAM.
		EXTENDED RANGE SAM (SHORT)	12	RANGE 51 THROUGH 99 NM.
		EXTENDED RANGE SAM (MEDIUM)	13	RANGE 100 THROUGH 150 NM.
		EXTENDED RANGE SAM (LONG)	14	RANGE GREATER THAN 150 NM.
		EXTENDED RANGE SSM (SHORT)	15	RANGE 76 THROUGH 199 NM.
		EXTENDED RANGE SSM (MEDIUM)	16	RANGE 200 THROUGH 300 NM.
		EXTENDED RANGE SSM (LONG)	17	RANGE GREATER THAN 300 NM.
		SM2 BLOCK II	18	AN EXTENDED RANGE SAM (SHORT).
		SM2 BLOCK III	19	AN EXTENDED RANGE SAM (SHORT).
		SM2 BLOCK IIIA	20	AN EXTENDED RANGE SAM (SHORT).
		SM2 BLOCK IIIB	21	AN EXTENDED RANGE SAM (SHORT).
		SM2 BLOCK IV	22	AN EXTENDED RANGE SAM (MEDIUM).
		SM2 BLOCK IVA	23	AN ANTI-THEATER BALLISTIC MISSILE (TBM) CAPABLE EXTENDED RANGE SAM (LONG).
		TOMAHAWK (TASM)	24	A LONG RANGE SSM TACTICAL ANTI- SHIP MISSILE.
		TOMAHAWK (TLAM C)	25	A LONG RANGE SSM TACTICAL LAND ATTACK MISSILE CONVENTIONAL.
		HARPOON	26	A MEDIUM RANGE SSM.
		SM3 (LEAP)	27	LIGHT EXOATMOSPHERIC PROJECTILE - AN ANTI-TBM MISSILE (EXTENDED RANGE (LONG)).
		UNDEFINED	28 THROUGH 56	
		MISSILE 1 THROUGH 7	57 THROUGH 63	AS SPECIFIED BY THE OPERATIONAL COMMANDER.

FIELD CODING FOR J13.3C5

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
408	044	OPERATIONAL MISSILE INVENTORY, 4 -----		USED IN CONJUNCTION WITH THE MISSILE TYPE FIELD IT AMPLIFIES. AN ESTIMATED AMOUNT OF OPERATIONAL MISSILES OF THE SPECIFIED TYPE REMAINING ON THE WEAPON SYSTEM. IN ONE MISSILE INCREMENTS.
		0 THROUGH 125 MISSILES	0 THROUGH 125	
		GREATER THAN 125	126	
		MISSILES		
		NO STATEMENT	127	
396	004	NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 4 -----		USED IN CONJUNCTION WITH THE MISSILE TYPE FIELD IT AMPLIFIES. SPECIFIES THE NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE FOR THE MISSILE TYPE SPECIFIED. IN INCREMENTS OF ONE.
		0 THROUGH 13 SYSTEMS	0 THROUGH 13	
		GREATER THAN 13 SYSTEMS	14	
		NO STATEMENT	15	

WORD TITLE: SECOND ADDITIONAL SURFACE (MARITIME) MISSILE STATUS
CONTINUATION WORD

24	23	22:	21:	20	19	18	17	16	15	14:	13:	12	11	10	09	08	07:	06	05	04	03	02:	01	00:											
NUMBER OF		:	:									:	:									:	:	:	:										
FIRE		:	:									:	:									:	:	:	:										
CONTROL		:	SP	:	OPERATIONAL MISSILE								:	SP	:	MISSILE TYPE, 7								:	CONTINUATION WORD								:	WORD	:
SYSTEMS		:	:	:	INVENTORY, 7								:	:	:									:	LABEL								:	FORMAT	:
AVAILABLE,		:	:	:									:	:	:									:									:	:	:
7		:	:	:									:	:	:									:									:	:	:
4		:	1	:	7								:	1	:	6								:	5								:	2	:

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25								
					:						:	:						:	:						:	:						
MISSILE TYPE, 9					:	NUMBER OF FIRE					:	:	OPERATIONAL MISSILE					:	:	MISSILE TYPE, 8					:	:	----					
					:	CONTROL SYSTEMS:SP					:	:	INVENTORY, 8					:	:						:	:						
					:	AVAILABLE, 8					:	:						:	:						:	:						
					:						:	:						:	:						:	:						
6					:	4					:	1	:	7					:	1	:	6					:					

:	69	68	67	66	65	64:	63	62	61	60:	59:	58	57	56	55	54	53	52:	51:	50	
:							:NUMBER OF FIRE :				:	OPERATIONAL MISSILE						:	:		
:	SPARE						:CONTROL SYSTEMS:SP				:	INVENTORY, 9						:	SP	----	
:							: AVAILABLE, 9 :				:							:	:		
:	6						:	4				:	7						:	1	:

WORD DESCRIPTION

WORD NUMBER: J13.3C6

WORD TITLE: SECOND ADDITIONAL SURFACE (MARITIME) MISSILE STATUS
CONTINUATION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	01
1551	001	CONTINUATION WORD LABEL	2-	6 5	00110
399	010	MISSILE TYPE, 7	7-	12 6	
756	001	SPARE (SP)	13	1	
408	047	OPERATIONAL MISSILE INVENTORY, 7	14-	20 7	
756	001	SPARE (SP)	21	1	
396	007	NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 7	22-	25 4	
399	011	MISSILE TYPE, 8	26-	31 6	SAME CODING AS FOR BITS 7-12.
756	001	SPARE (SP)	32	1	
408	048	OPERATIONAL MISSILE INVENTORY, 8	33-	39 7	SAME CODING AS FOR BITS 14-20.
756	001	SPARE (SP)	40	1	
396	008	NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 8	41-	44 4	SAME CODING AS FOR BITS 22-25.
399	012	MISSILE TYPE, 9	45-	50 6	SAME CODING AS FOR BITS 7-12.
756	001	SPARE (SP)	51	1	
408	049	OPERATIONAL MISSILE INVENTORY, 9	52-	58 7	SAME CODING AS FOR BITS 14-20.
756	001	SPARE (SP)	59	1	
396	009	NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 9	60-	63 4	SAME CODING AS FOR BITS 22-25.
756	006	SPARE	64-	69 6	

FIELD CODING FOR J13.3C6

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
399	010	MISSILE TYPE, 7 -----		INDICATES THE TYPE OF MISSILE BEING REPORTED.
		NO STATEMENT	0	
		SHORT RANGE SAM	1	RANGE LESS THAN 10 NM.
		MEDIUM RANGE SAM	2	RANGE 10-50 NM.
		LONG RANGE SAM	3	RANGE GREATER THAN 50 NM.
		SHORT RANGE SSM	4	RANGE LESS THAN 15 NM.
		MEDIUM RANGE SSM	5	RANGE 15-75 NM.
		LONG RANGE SSM	6	RANGE GREATER THAN 75 NM.
		UNDEFINED	7	
		SM2(ER)	8	A LONG RANGE SAM.
		SM2(MR)	9	A MEDIUM RANGE SAM.
		SM1(ER)	10	A MEDIUM RANGE SAM.
		SM1(MR)	11	A MEDIUM RANGE SAM.
		EXTENDED RANGE SAM (SHORT)	12	RANGE 51 THROUGH 99 NM.
		EXTENDED RANGE SAM (MEDIUM)	13	RANGE 100 THROUGH 150 NM.
		EXTENDED RANGE SAM (LONG)	14	RANGE GREATER THAN 150 NM.
		EXTENDED RANGE SSM (SHORT)	15	RANGE 76 THROUGH 199 NM.
		EXTENDED RANGE SSM (MEDIUM)	16	RANGE 200 THROUGH 300 NM.
		EXTENDED RANGE SSM (LONG)	17	RANGE GREATER THAN 300 NM.
		SM2 BLOCK II	18	AN EXTENDED RANGE SAM (SHORT).
		SM2 BLOCK III	19	AN EXTENDED RANGE SAM (SHORT).
		SM2 BLOCK IIIA	20	AN EXTENDED RANGE SAM (SHORT).
		SM2 BLOCK IIIB	21	AN EXTENDED RANGE SAM (SHORT).
		SM2 BLOCK IV	22	AN EXTENDED RANGE SAM (MEDIUM).
		SM2 BLOCK IVA	23	AN ANTI-THEATER BALLISTIC MISSILE (TBM) CAPABLE EXTENDED RANGE SAM (LONG).
		TOMAHAWK (TASM)	24	A LONG RANGE SSM TACTICAL ANTI-SHIP MISSILE.
		TOMAHAWK (TLAM C)	25	A LONG RANGE SSM TACTICAL LAND ATTACK MISSILE CONVENTIONAL.
		HARPOON	26	A MEDIUM RANGE SSM.
		SM3 (LEAP)	27	LIGHT EXOATMOSPHERIC PROJECTILE - AN ANTI-TBM MISSILE (EXTENDED RANGE (LONG)).
		UNDEFINED	28 THROUGH 56	
		MISSILE 1 THROUGH 7	57 THROUGH 63	AS SPECIFIED BY THE OPERATIONAL COMMANDER.

FIELD CODING FOR J13.3C6

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
408	047	OPERATIONAL MISSILE INVENTORY, 7 -----		USED IN CONJUNCTION WITH THE MISSILE TYPE FIELD IT AMPLIFIES. AN ESTIMATED AMOUNT OF OPERATIONAL MISSILES OF THE SPECIFIED TYPE REMAINING ON THE WEAPON SYSTEM. IN ONE MISSILE INCREMENTS.
		0 THROUGH 125 MISSILES	0 THROUGH 125	
		GREATER THAN 125	126	
		MISSILES		
		NO STATEMENT	127	
396	007	NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 7 -----		USED IN CONJUNCTION WITH THE MISSILE TYPE FIELD IT AMPLIFIES. SPECIFIES THE NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE FOR THE MISSILE TYPE SPECIFIED. IN INCREMENTS OF ONE.
		0 THROUGH 13 SYSTEMS	0 THROUGH 13	
		GREATER THAN 13 SYSTEMS	14	
		NO STATEMENT	15	

WORD MAP

WORD NUMBER: J13.3C7

WORD TITLE: THIRD ADDITIONAL SURFACE (MARITIME) MISSILE STATUS
CONTINUATION WORD

24	23	22:	21:	20	19	18	17	16	15	14:	13:	12	11	10	09	08	07:	06	05	04	03	02:	01	00:		
NUMBER OF		:	:								:	:						:					:	:		
FIRE		:	:								:	:						:					:	:		
CONTROL		:SP	:	OPERATIONAL MISSILE							:SP	:	MISSILE TYPE, 10					CONTINUATION WORD				:	WORD			
SYSTEMS		:	:	INVENTORY, 10							:	:						LABEL				:	FORMAT			
AVAILABLE,		:	:								:	:										:	:			
10		:	:								:	:										:	:			
4		:	1	:	7							:	1	:	6					5				:	2	:
		:	:								:	:										:	:			

49	48	47	46	45:	44	43	42	41:	40:	39	38	37	36	35	34	33:	32:	31	30	29	28	27	26:	25	
				:	NUMBER OF FIRE				:	:							:	:					:	:	
MISSILE TYPE, 12				:	CONTROL SYSTEMS:SP				:	OPERATIONAL MISSILE						:	SP	:	MISSILE TYPE, 11				:	----	
				:	AVAILABLE, 11				:	INVENTORY, 11						:	:	:					:	:	
				:					:							:	:	:					:	:	
6				:	4				:	1	:	7						:	1	:	6				:
				:					:							:	:	:					:	:	

:	69	68	67	66	65	64:	63	62	61	60:	59:	58	57	56	55	54	53	52:	51:	50				
:							NUMBER OF FIRE				:	:	OPERATIONAL MISSILE						:	:			:	:
:	SPARE						CONTROL SYSTEMS:SP				:	INVENTORY, 12						:	SP	:	----			:
:							AVAILABLE, 12				:							:	:	:			:	:
:	6						:	4				:	1	:	7						:	1	:	:
:							:					:							:	:			:	:

WORD DESCRIPTION

WORD NUMBER: J13.3C7

WORD TITLE: THIRD ADDITIONAL SURFACE (MARITIME) MISSILE STATUS
CONTINUATION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	01
1551	001	CONTINUATION WORD LABEL	2-	6 5	00111
399	013	MISSILE TYPE, 10	7-	12 6	
756	001	SPARE (SP)	13	1	
408	050	OPERATIONAL MISSILE INVENTORY, 10	14-	20 7	
756	001	SPARE (SP)	21	1	
396	010	NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 10	22-	25 4	
399	014	MISSILE TYPE, 11	26-	31 6	SAME CODING AS FOR BITS 7-12.
756	001	SPARE (SP)	32	1	
408	051	OPERATIONAL MISSILE INVENTORY, 11	33-	39 7	SAME CODING AS FOR BITS 14-20.
756	001	SPARE (SP)	40	1	
396	011	NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 11	41-	44 4	SAME CODING AS FOR BITS 22-25.
399	015	MISSILE TYPE, 12	45-	50 6	SAME CODING AS FOR BITS 7-12.
756	001	SPARE (SP)	51	1	
408	052	OPERATIONAL MISSILE INVENTORY, 12	52-	58 7	SAME CODING AS FOR BITS 14-20.
756	001	SPARE (SP)	59	1	
396	012	NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 12	60-	63 4	SAME CODING AS FOR BITS 22-25.
756	006	SPARE	64-	69 6	

FIELD CODING FOR J13.3C7

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
399	013	MISSILE TYPE, 10 -----		INDICATES THE TYPE OF MISSILE BEING REPORTED.
		NO STATEMENT	0	
		SHORT RANGE SAM	1	RANGE LESS THAN 10 NM.
		MEDIUM RANGE SAM	2	RANGE 10-50 NM.
		LONG RANGE SAM	3	RANGE GREATER THAN 50 NM.
		SHORT RANGE SSM	4	RANGE LESS THAN 15 NM.
		MEDIUM RANGE SSM	5	RANGE 15-75 NM.
		LONG RANGE SSM	6	RANGE GREATER THAN 75 NM.
		UNDEFINED	7	
		SM2(ER)	8	A LONG RANGE SAM.
		SM2(MR)	9	A MEDIUM RANGE SAM.
		SM1(ER)	10	A MEDIUM RANGE SAM.
		SM1(MR)	11	A MEDIUM RANGE SAM.
		EXTENDED RANGE SAM (SHORT)	12	RANGE 51 THROUGH 99 NM.
		EXTENDED RANGE SAM (MEDIUM)	13	RANGE 100 THROUGH 150 NM.
		EXTENDED RANGE SAM (LONG)	14	RANGE GREATER THAN 150 NM.
		EXTENDED RANGE SSM (SHORT)	15	RANGE 76 THROUGH 199 NM.
		EXTENDED RANGE SSM (MEDIUM)	16	RANGE 200 THROUGH 300 NM.
		EXTENDED RANGE SSM (LONG)	17	RANGE GREATER THAN 300 NM.
		SM2 BLOCK II	18	AN EXTENDED RANGE SAM (SHORT).
		SM2 BLOCK III	19	AN EXTENDED RANGE SAM (SHORT).
		SM2 BLOCK IIIA	20	AN EXTENDED RANGE SAM (SHORT).
		SM2 BLOCK IIIB	21	AN EXTENDED RANGE SAM (SHORT).
		SM2 BLOCK IV	22	AN EXTENDED RANGE SAM (MEDIUM).
		SM2 BLOCK IVA	23	AN ANTI-THEATER BALLISTIC MISSILE (TBM) CAPABLE EXTENDED RANGE SAM (LONG).
		TOMAHAWK (TASM)	24	A LONG RANGE SSM TACTICAL ANTI-SHIP MISSILE.
		TOMAHAWK (TLAM C)	25	A LONG RANGE SSM TACTICAL LAND ATTACK MISSILE CONVENTIONAL.
		HARPOON	26	A MEDIUM RANGE SSM.
		SM3 (LEAP)	27	LIGHT EXOATMOSPHERIC PROJECTILE - AN ANTI-TBM MISSILE (EXTENDED RANGE (LONG)).
		UNDEFINED	28 THROUGH 56	
		MISSILE 1 THROUGH 7	57 THROUGH 63	AS SPECIFIED BY THE OPERATIONAL COMMANDER.

FIELD CODING FOR J13.3C7

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
408	050	OPERATIONAL MISSILE INVENTORY, 10 -----		USED IN CONJUNCTION WITH THE MISSILE TYPE FIELD IT AMPLIFIES. AN ESTIMATED AMOUNT OF OPERATIONAL MISSILES OF THE SPECIFIED TYPE REMAINING ON THE WEAPON SYSTEM. IN ONE MISSILE INCREMENTS.
		0 THROUGH 125 MISSILES	0 THROUGH 125	
		GREATER THAN 125	126	
		MISSILES		
		NO STATEMENT	127	
396	010	NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 10 -----		USED IN CONJUNCTION WITH THE MISSILE TYPE FIELD IT AMPLIFIES. SPECIFIES THE NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE FOR THE MISSILE TYPE SPECIFIED. IN INCREMENTS OF ONE.
		0 THROUGH 13 SYSTEMS	0 THROUGH 13	
		GREATER THAN 13 SYSTEMS	14	
		NO STATEMENT	15	

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

J13.4 MESSAGE SUMMARY

PURPOSE

The J13.4 Subsurface (Maritime) Platform and System Status message provides the current status of a subsurface (maritime) platform to include operational status and on board systems' status.

DATA ELEMENT SUMMARY

<u>J13.4I</u>		<u>J13.4C2 (Continued)</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	ELECTRONIC WARFARE SUPPORT AND	2
LABEL, J-SERIES	5	OTHER ELECTRONIC ATTACK	
SUBLABEL, J-SERIES	3	ENERGY GENERATION SYSTEM-	2
MESSAGE LENGTH INDICATOR	3	NUCLEAR	
SPARE	4	ENERGY GENERATION SYSTEM-	2
TRACK NUMBER, REFERENCE	19	CONVENTIONAL	
SUBSURFACE (MARITIME) SPECIFIC	12	ES FREQUENCY BAND A	2
TYPE		ES FREQUENCY BAND B	2
SPARE	22	ES FREQUENCY BAND C	2
		ES FREQUENCY BAND D	2
		ES FREQUENCY BAND E	2
		ES FREQUENCY BAND F	2
		ES FREQUENCY BAND G	2
		ES FREQUENCY BAND H	2
		ES FREQUENCY BAND I	2
		ES FREQUENCY BAND J	2
		ES FREQUENCY BAND K	2
		ES FREQUENCY BAND L	2
		ES FREQUENCY BAND M	2
		HF DIRECTION FINDER	2
		VHF DIRECTION FINDER	2
		UHF DIRECTION FINDER	2
		ACTIVE SONAR	2
		HULL MOUNTED PASSIVE SONAR	2
		TOWED ARRAY SONAR	2
		SPARE	7
<u>J13.4C1</u>			
DATA ELEMENT	# BITS		
WORD FORMAT	2		
CONTINUATION WORD LABEL	5		
MISSILE TYPE, 1	6		
OPERATIONAL MISSILE INVENTORY,	7		
1			
MISSILE TYPE, 2	6		
OPERATIONAL MISSILE INVENTORY,	7		
2			
MISSILE TYPE, 3	6		
OPERATIONAL MISSILE INVENTORY,	7		
3			
TORPEDO TYPE, 1	4		
TORPEDO INVENTORY, 1	3		
TORPEDO TYPE, 2	4		
TORPEDO INVENTORY, 2	3		
TORPEDO TUBE	2		
VERTICAL LAUNCHER	2		
FIRE CONTROL SYSTEM	2		
SPARE	4		
<u>J13.4C2</u>			
DATA ELEMENT	# BITS		
WORD FORMAT	2		
CONTINUATION WORD LABEL	5		
COMMAND AND CONTROL SYSTEM	2		
DATA LINK AND DISPLAY SYSTEM	2		
NAVIGATION SYSTEM	2		
COMMUNICATION SYSTEM	2		
SURFACE SEARCH RADAR	2		
IFF/SIF INTERROGATOR AND	2		
TRANSPONDER SYSTEM			

MIL-STD-6016B

J13.4 TRANSMIT/RECEIVE RULES

TITLE: Subsurface (Maritime) Platform and System Status Message

TRANSMIT RULES

1. The J13.4 Subsurface (Maritime) Platform and System Status message shall be transmitted by subsurface JU platforms.
2. JU platforms shall transmit this message periodically at an RRN = 2 (3.2 minutes, 2.4 - 4 minute interval) or when data change.
3. Only the J13.4CX continuation words appropriate to the platform's equipment and stores load shall be transmitted.
4. A platform reporting its own status shall set the Reference TN field to the same track number as Source TN in the header word.

RECEIVE RULES

There are no receive rules specified for this message.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: SUBSURFACE (MARITIME) PLATFORM AND SYSTEM STATUS INITIAL
WORD

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25	

<---		:	SUBSURFACE (MARITIME) SPECIFIC TYPE												:	TRACK NUMBER, REFERENCE									
		:													:										

		:	12												:	19									

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50
:																				
:																				
:											SPARE									
:																				
:											22									

WORD DESCRIPTION

WORD NUMBER: J13.4I

WORD TITLE: SUBSURFACE (MARITIME) PLATFORM AND SYSTEM STATUS INITIAL
WORD

REFERENCE			BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR		POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT		0-	1 2	00
270 004	LABEL, J-SERIES		2-	6 5	01101
271 005	SUBLABEL, J-SERIES		7-	9 3	100
800 001	MESSAGE LENGTH INDICATOR		10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS
756 004	SPARE		13-	16 4	
769 002	TRACK NUMBER, REFERENCE		17-	35 19	
809 001	SUBSURFACE (MARITIME) SPECIFIC TYPE		36-	47 12	
756 022	SPARE		48-	69 22	

FIELD CODING FOR J13.4I

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----		A REFERENCE NUMBER USED TO ASSOCIATE INFORMATION AND DIRECTIVES WITH THE TRACK. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE-BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANNN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6
00111	7
01000	A
01001	B
01010	C
01011	D
01100	E
01101	F
01110	G
01111	H

FIELD CODING FOR J13.4I

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
				10000 J
				10001 K
				10010 L
				10011 M
				10100 N
				10101 P
				10110 Q
				10111 R
				11000 S
				11001 T
				11010 U
				11011 V
				11100 W
				11101 X
				11110 Y
				11111 Z
		00000	0	NO STATEMENT.
		00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU). ILLEGAL.
		00077	63	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU). RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		00100-00175	64 THROUGH 125	COLLECTIVE ADDRESS.
		00176	126	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		00177	127	ILLEGAL.
		00200-07776	128 THROUGH 4094	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		07777	4095	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		0A000-0Z777	4096 THROUGH 16383	ILLEGAL.
		10000-17777	16384 THROUGH 20479	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
				ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND

FIELD CODING FOR J13.4I

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		20000-27777	32768 THROUGH 36863	REFERENCE POINTS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE

FIELD CODING FOR J13.4I

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		70000-77776	114688 THROUGH 118782	USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
809	001	SUBSURFACE (MARITIME) SPECIFIC TYPE -----		THE SPECIFIC TYPE OF POINT OR TRACK WITH AN ENVIRONMENT/CATEGORY OF SUBSURFACE (MARITIME).
		NO STATEMENT	0	
		SS GENERAL	1	
		ABTA0 SS	2	
		DISUSED	3	
		DISUSED	4	
		UNDEFINED	5	
		DISUSED	6	
		GUPPY II SS	7	
		GUPPY IIA SS	8	
		GUPPY III SS	9	
		HAI LUNG SS	10	
		DISUSED	11	
		SAURO (TYPE 1081) SS	12	
		SAURO (IMPROVED) SS	13	
		TANG SS	14	
		TYPE SNA 72 SS	15	
		UZUSHIO SS	16	
		WALRUS SS	17	
		YUUSHIO SS	18	
		UNDEFINED	19	
		DISUSED	20	
		PELOSI SS	21	
		UNDEFINED	22 THROUGH 360	
		SSB GENERAL	361	
		GOLF SSB	362	

FIELD CODING FOR J13.4I

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
809	001	SUBSURFACE (MARITIME) SPECIFIC (CONTINUED)		
		TYPE		

		GOLF II SSB	363	
		GOLF III SSB	364	
		GOLF V SSB	365	
		UNDEFINED	366	THROUGH 440
		SSBN GENERAL	441	
		BENJAMIN FRANKLIN SSBN	442	
		DELTA I SSBN	443	
		DELTA II SSBN	444	
		DELTA III SSBN	445	
		DELTA IV SSBN	446	
		HOTEL III SSBN	447	
		DISUSED	448	
		L'INFLEXIBLE SSBN	449	
		DISUSED	450	
		UNDEFINED	451	
		OHIO SSBN	452	
		RESOLUTION SSBN	453	
		TYPHOON SSBN	454	
		VANGUARD SSBN	455	
		YANKEE SSBN	456	
		YANKEE I SSBN	457	
		YANKEE II SSBN	458	
		XIA SSBN	459	
		LE TERRIBLE SSBN	460	
		UNDEFINED	461	THROUGH 720
		SSN GENERAL	721	
		AKULA SSN	722	
		ALFA SSN	723	
		AMATHEPT SSN	724	
		CHARLIE/VICTOR SSGN/SSN	725	
		CHURCHILL SSN	726	
		ECHO/NOVEMBER SSGN/SSN	727	
		DISUSED	728	
		DISUSED	729	
		HAN SSN	730	
		HOTEL SSN	731	
		LOS ANGELES SSN	732	
		MIKE SSN	733	
		NARWHAL SSN	734	
		DISUSED	735	
		RUBIS SSN	736	
		SEAWOLF SSN	737	

FIELD CODING FOR J13.4I

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
809	001	SUBSURFACE (MARITIME) SPECIFIC (CONTINUED) TYPE		

		SIERRA SSN	738	
		DISUSED	739	
		DISUSED	740	
		STURGEON SSN	741	
		SWIFTSURE SSN	742	
		TRAFALGAR SSN	743	
		DISUSED	744	
		VICTOR I SSN	745	
		VICTOR II SSN	746	
		VICTOR III SSN	747	
		YANKEE SSN	748	
		VIRGINIA SSN	749	
		UNDEFINED	750 THROUGH 1200	
		SSG GENERAL	1201	
		JULIETT SSG	1202	
		UNDEFINED	1203 THROUGH 1245	
		SSGN GENERAL	1246	
		CHARLIE I SSGN	1247	
		CHARLIE II SSGN	1248	
		ECHO II SSGN	1249	
		OSCAR SSGN	1250	
		PAPA SSGN	1251	
		UNDEFINED	1252 THROUGH 1345	
		SSK GENERAL	1346	
		AGOSTA SSK	1347	
		UNDEFINED	1348	
		FOXTROT SSK	1349	
		HEROJ SSK	1350	
		KILO SSK	1351	
		MING SSK	1352	
		NARVAL SSK	1353	
		DISUSED	1354 THROUGH 1355	
		ROMEO SSK	1356	
		SAVA SSK	1357	
		SUTJESKA SSK	1358	
		TANGO SSK	1359	
		UPHOLDER SSK	1360	
		WHISKEY SSK	1361	
		WHISKEY V SSK	1362	
		ZULU IV SSK	1363	
		DORIS SSK	1364	
		VICTORIA SSK	1365	

5.3-221

MIL-STD-6016B

FIELD CODING FOR J13.4I

(SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
809	001	SUBSURFACE (MARITIME) SPECIFIC (CONTINUED)		
		TYPE		

		TYPE 212 SSK	1366	
		UNDEFINED	1367	THROUGH 1665
		SSC GENERAL	1666	
		DELFINEN SSC	1667	
		DRAKEN SSC	1668	
		NAECKEN SSC	1669	
		NARHVALEN SSC	1670	
		SJOORMEN SSC	1671	
		TOTI TYPE 1075 SSC	1672	
		TYPE 205 SSC	1673	
		TYPE 206 SSC	1674	
		KOBVEN SSC	1675	
		TYPE 209 (TYPE 1100) SSC	1676	
		TYPE 209 (TYPE 1200) SSC	1677	
		TYPE 209 (TYPE 1300) SSC	1678	
		TYPE 209 (TYPE 1400) SSC	1679	
		TYPE 209 (TYPE 1500) SSC	1680	
		ULA SSC	1681	
		TYPE 211 SSC	1682	
		VASTERGOETLAND SSC	1683	
		TYPE 206A SSC	1684	
		UNDEFINED	1685	THROUGH 1945
		SSA GENERAL	1946	
		BRAVO SSA	1947	
		DOLPHIN (AGSS) SSA	1948	
		GOLF I SSA	1949	
		GOLF I (MODIFIED) SSA	1950	
		GOLF II SSA	1951	
		INDIA SSA	1952	
		LIMA SSA	1953	
		ROMEO SSA	1954	
		ZULU SSA	1955	
		UNDEFINED	1956	THROUGH 4069
		SUBSURFACE SPECIFIC	4070	THROUGH 4094
		TYPE 1-25		
		RESET TO NO STATEMENT	4095	

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J13.4C1
WORD TITLE: SUBSURFACE (MARITIME) PLATFORM AND SYSTEM STATUS
CONTINUATION WORD 1

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00																							
MISSILE TYPE, 2					:	OPERATIONAL MISSILE INVENTORY, 1					:	MISSILE TYPE, 1					:	CONTINUATION WORD LABEL					:	WORD FORMAT		:																					
6					:	7					:	6					:	5					:	2		:																					
:	49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25																						
:	TORPEDO TYPE, 1				:	OPERATIONAL MISSILE INVENTORY, 3					:	MISSILE TYPE, 3					:	OPERATIONAL MISSILE INVENTORY, 2					:	---																							
:					:						:						:						:																								
:	4				:	7					:	6					:	7					:																								
					:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50																						
					:	SPARE					:	FC SYS					:	VERTLNC H					:	TORP TUBE					:	TORPEDO INVENTORY, 2					:	TORPEDO INVENTORY, 1					:						
					:						:						:						:						:						:						:						
					:	4					:	2					:	2					:	2					:	3					:	4					:	3					:

WORD DESCRIPTION

WORD NUMBER: J13.4C1

WORD TITLE: SUBSURFACE (MARITIME) PLATFORM AND SYSTEM STATUS
CONTINUATION WORD 1

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	01
1551	001	CONTINUATION WORD LABEL	2-	6 5	00001
399	004	MISSILE TYPE, 1	7-	12 6	
408	037	OPERATIONAL MISSILE INVENTORY, 1	13-	19 7	
399	005	MISSILE TYPE, 2	20-	25 6	SAME CODING AS FOR BITS 7-12.
408	038	OPERATIONAL MISSILE INVENTORY, 2	26-	32 7	SAME CODING AS FOR BITS 13-19.
399	006	MISSILE TYPE, 3	33-	38 6	SAME CODING AS FOR BITS 7-12.
408	039	OPERATIONAL MISSILE INVENTORY, 3	39-	45 7	SAME CODING AS FOR BITS 13-19.
399	016	TORPEDO TYPE, 1	46-	49 4	
408	053	TORPEDO INVENTORY, 1	50-	52 3	
399	017	TORPEDO TYPE, 2	53-	56 4	SAME CODING AS FOR BITS 46-49.
408	054	TORPEDO INVENTORY, 2	57-	59 3	SAME CODING AS FOR BITS 50-52.
1665	052	TORPEDO TUBE (TORP TUBE)	60-	61 2	
1665	053	VERTICAL LAUNCHER (VERTLNCH)	62-	63 2	
1665	054	FIRE CONTROL SYSTEM (FC SYS)	64-	65 2	
756	004	SPARE	66-	69 4	

FIELD CODING FOR J13.4C1

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
399	004	MISSILE TYPE, 1 -----		INDICATES THE TYPE OF MISSILE BEING REPORTED.
		NO STATEMENT	0	
		SHORT RANGE SAM	1	RANGE LESS THAN 10 NM.
		MEDIUM RANGE SAM	2	RANGE 10-50 NM.
		LONG RANGE SAM	3	RANGE GREATER THAN 50 NM.
		SHORT RANGE SSM	4	RANGE LESS THAN 15 NM.
		MEDIUM RANGE SSM	5	RANGE 15-75 NM.
		LONG RANGE SSM	6	RANGE GREATER THAN 75 NM.
		UNDEFINED	7	
		SM2(ER)	8	A LONG RANGE SAM.
		SM2(MR)	9	A MEDIUM RANGE SAM.
		SM1(ER)	10	A MEDIUM RANGE SAM.
		SM1(MR)	11	A MEDIUM RANGE SAM.
		EXTENDED RANGE SAM (SHORT)	12	RANGE 51 THROUGH 99 NM.
		EXTENDED RANGE SAM (MEDIUM)	13	RANGE 100 THROUGH 150 NM.
		EXTENDED RANGE SAM (LONG)	14	RANGE GREATER THAN 150 NM.
		EXTENDED RANGE SSM (SHORT)	15	RANGE 76 THROUGH 199 NM.
		EXTENDED RANGE SSM (MEDIUM)	16	RANGE 200 THROUGH 300 NM.
		EXTENDED RANGE SSM (LONG)	17	RANGE GREATER THAN 300 NM.
		SM2 BLOCK II	18	AN EXTENDED RANGE SAM (SHORT).
		SM2 BLOCK III	19	AN EXTENDED RANGE SAM (SHORT).
		SM2 BLOCK IIIA	20	AN EXTENDED RANGE SAM (SHORT).
		SM2 BLOCK IIIB	21	AN EXTENDED RANGE SAM (SHORT).
		SM2 BLOCK IV	22	AN EXTENDED RANGE SAM (MEDIUM).
		SM2 BLOCK IVA	23	AN ANTI-THEATER BALLISTIC MISSILE (TBM) CAPABLE EXTENDED RANGE SAM (LONG).
		TOMAHAWK (TASM)	24	A LONG RANGE SSM TACTICAL ANTI-SHIP MISSILE.
		TOMAHAWK (TLAM C)	25	A LONG RANGE SSM TACTICAL LAND ATTACK MISSILE CONVENTIONAL.
		HARPOON	26	A MEDIUM RANGE SSM.
		SM3 (LEAP)	27	LIGHT EXOATMOSPHERIC PROJECTILE - AN ANTI-TBM MISSILE (EXTENDED RANGE (LONG)).
		UNDEFINED	28 THROUGH 56	
		MISSILE 1 THROUGH 7	57 THROUGH 63	AS SPECIFIED BY THE OPERATIONAL COMMANDER.

FIELD CODING FOR J13.4C1

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
408	037	OPERATIONAL MISSILE INVENTORY, 1 ----- 0 THROUGH 125 MISSILES GREATER THAN 125 MISSILES NO STATEMENT	0 THROUGH 125 126 127	USED IN CONJUNCTION WITH THE MISSILE TYPE FIELD IT AMPLIFIES. AN ESTIMATED AMOUNT OF OPERATIONAL MISSILES OF THE SPECIFIED TYPE REMAINING ON THE WEAPON SYSTEM. IN ONE MISSILE INCREMENTS.
399	016	TORPEDO TYPE, 1 ----- NO STATEMENT TORPEDO 1 THROUGH 4 UNDEFINED	0 1 THROUGH 4 5 THROUGH 15	INDICATES TYPE OF TORPEDO BEING REPORTED. SPECIFIC TORPEDO DESIGNATION AS SPECIFIED BY OPERATIONAL COMMANDER.
408	053	TORPEDO INVENTORY, 1 ----- 0 THROUGH 4 TORPEDOES 5 THROUGH 8 TORPEDOES GREATER THAN 8 TORPEDOES NO STATEMENT	0 THROUGH 4 5 6 7	USED IN CONJUNCTION WITH THE TORPEDO TYPE FIELD IT AMPLIFIES. AN ESTIMATED AMOUNT OF OPERATIONAL TORPEDOES OF THE SPECIFIED TYPE REMAINING ON THE WEAPON SYSTEM. IN ONE TORPEDO INCREMENTS.
1665	052	TORPEDO TUBE ----- NO STATEMENT DEGRADED NOT OPERATIONAL OPERATIONAL	0 1 2 3	INDICATES STATUS OF TORPEDO TUBES AND COMPONENTS. PARTIALLY OPERATIONAL.
1665	053	VERTICAL LAUNCHER ----- NO STATEMENT DEGRADED NOT OPERATIONAL OPERATIONAL	0 1 2 3	INDICATES STATUS OF VERTICAL LAUNCHER AND COMPONENTS. PARTIALLY OPERATIONAL.
1665	054	FIRE CONTROL SYSTEM ----- NO STATEMENT	0	INDICATES STATUS OF FIRE CONTROL SYSTEM AND COMPONENTS.

FIELD CODING FOR J13.4C1 (SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1665	054	FIRE CONTROL SYSTEM	(CONTINUED)	

		DEGRADED	1	PARTIALLY OPERATIONAL.
		NOT OPERATIONAL	2	
		OPERATIONAL	3	

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: SUBSURFACE (MARITIME) PLATFORM AND SYSTEM STATUS
CONTINUATION WORD 2

[illegible]

:	69	68	67	66	65	64	63:	62	61:	60	59:	58	57:	56	55:	54	53:	52	51:	50	
:								:			:	HMP	S	V	S	O	:			:	E
:	SPARE							:	T	A	:	S	O	N	:	U	H	:	D	F	:
:								:			:	S	O	N	:	V	H	:	D	F	:
:								:			:	M	:			:	H	:	F	:	M
:	7							:	2		:	2		:	2		:	2		:	2

WORD DESCRIPTION

WORD NUMBER: J13.4C2

WORD TITLE: SUBSURFACE (MARITIME) PLATFORM AND SYSTEM STATUS
CONTINUATION WORD 2

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	01
1551	001	CONTINUATION WORD LABEL	2-	6 5	00010
1665	016	COMMAND AND CONTROL SYSTEM (C2 SYS)	7-	8 2	
1665	017	DATA LINK AND DISPLAY SYSTEM (DL SYS)	9-	10 2	
1665	018	NAVIGATION SYSTEM (NAV SYS)	11-	12 2	
1665	019	COMMUNICATION SYSTEM (COMM SYS)	13-	14 2	
1665	020	SURFACE SEARCH RADAR (SS RAD)	15-	16 2	
1665	024	IFF/SIF INTERROGATOR AND TRANSPONDER SYSTEM (IFF SIF)	17-	18 2	
1665	027	ELECTRONIC WARFARE SUPPORT AND OTHER ELECTRONIC ATTACK (ES)	19-	20 2	
1665	033	ENERGY GENERATION SYSTEM- NUCLEAR (GEN NUC)	21-	22 2	
1665	034	ENERGY GENERATION SYSTEM- CONVENTIONAL (GEN CONV)	23-	24 2	
268	001	ES FREQUENCY BAND A (ES A)	25-	26 2	
268	002	ES FREQUENCY BAND B (ES B)	27-	28 2	
268	003	ES FREQUENCY BAND C (ES C)	29-	30 2	
268	004	ES FREQUENCY BAND D (ES D)	31-	32 2	
268	005	ES FREQUENCY BAND E (ES E)	33-	34 2	
268	006	ES FREQUENCY BAND F (ES F)	35-	36 2	
268	007	ES FREQUENCY BAND G (ES G)	37-	38 2	
268	008	ES FREQUENCY BAND H (ES H)	39-	40 2	
268	009	ES FREQUENCY BAND I (ES I)	41-	42 2	
268	010	ES FREQUENCY BAND J (ES J)	43-	44 2	
268	011	ES FREQUENCY BAND K (ES K)	45-	46 2	
268	012	ES FREQUENCY BAND L (ES L)	47-	48 2	
268	013	ES FREQUENCY BAND M (ES M)	49-	50 2	
268	014	HF DIRECTION FINDER (HF DF)	51-	52 2	
268	015	VHF DIRECTION FINDER (VHF DF)	53-	54 2	
268	016	UHF DIRECTION FINDER (UHF DF)	55-	56 2	
1665	055	ACTIVE SONAR (ACTV SON)	57-	58 2	
1665	056	HULL MOUNTED PASSIVE SONAR (HMPSVSON)	59-	60 2	
1665	057	TOWED ARRAY SONAR (TA SON)	61-	62 2	

WORD DESCRIPTION

WORD NUMBER: J13.4C2

WORD TITLE: SUBSURFACE (MARITIME) PLATFORM AND SYSTEM STATUS
CONTINUATION WORD 2

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
756	007 SPARE	63-	69	7

FIELD CODING FOR J13.4C2

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1665	016	COMMAND AND CONTROL SYSTEM -----		INDICATES THE STATUS OF DATA DISPLAY GROUP, DATA PROCESSING EQUIPMENT, DIGITAL DATA SWITCHBOARDS, INTERFACE EQUIPMENT, DIGITAL DATA COMMUNICATIONS, COMMAND AND CONTROL TESTING, AND COMMAND AND CONTROL ANALOG SWITCHBOARDS.
		NO STATEMENT	0	
		DEGRADED	1	PARTIALLY OPERATIONAL.
		NOT OPERATIONAL	2	
		OPERATIONAL	3	
1665	017	DATA LINK AND DISPLAY SYSTEM -----		INDICATES THE STATUS OF ALL DATA LINK AND VISUAL DISPLAY COMPONENTS AND RELATED SYSTEMS.
		NO STATEMENT	0	
		DEGRADED	1	PARTIALLY OPERATIONAL.
		NOT OPERATIONAL	2	
		OPERATIONAL	3	
1665	018	NAVIGATION SYSTEM -----		INDICATES THE STATUS OF A UNIT'S ELECTRONIC AND ELECTRICAL NAVIGATION AIDS, RADIO, ACOUSTICAL, OPTICAL, COMPASS, AND INERTIAL NAVIGATION SYSTEMS.
		NO STATEMENT	0	
		DEGRADED	1	PARTIALLY OPERATIONAL.
		NOT OPERATIONAL	2	
		OPERATIONAL	3	
1665	019	COMMUNICATION SYSTEM -----		INDICATES THE STATUS OF RADIOS, UNDERWATER, VISUAL, AUDIBLE, TELEMETRY, TELETYPE, FACSIMILE, AND ALL SATELLITE COMMUNICATIONS RELATED SYSTEMS AND TELECOMMUNICATIONS SECURITY EQUIPMENT.
		NO STATEMENT	0	
		DEGRADED	1	PARTIALLY OPERATIONAL.
		NOT OPERATIONAL	2	
		OPERATIONAL	3	
1665	020	SURFACE SEARCH RADAR -----		INDICATES THE STATUS OF SEARCH AND NAVIGATIONAL RADAR AND THEIR COMPONENTS.

5.3-233

MIL-STD-6016B

FIELD CODING FOR J13.4C2

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1665	020	SURFACE SEARCH RADAR -----	(CONTINUED)	
		NO STATEMENT	0	
		DEGRADED	1	PARTIALLY OPERATIONAL.
		NOT OPERATIONAL	2	
		OPERATIONAL	3	
1665	024	IFF/SIF INTERROGATOR AND TRANSPONDER SYSTEM -----		INDICATES THE STATUS OF THE IFF/SIF TRANSPONDER AND INTERROGATOR, INCLUDING MODE 4 AND THE IDENTIFICATION SYSTEM.
		NO STATEMENT	0	
		DEGRADED	1	PARTIALLY OPERATIONAL.
		NOT OPERATIONAL	2	
		OPERATIONAL	3	
1665	027	ELECTRONIC WARFARE SUPPORT AND OTHER ELECTRONIC ATTACK -----		INDICATES THE STATUS OF ELECTRONIC WARFARE SUPPORT AND ACOUSTIC WARFARE SYSTEMS. INCLUDES ACM, ACCM, ACSM, MECHANICAL EQUIPMENT, PASSIVE EQUIPMENT, DEGAUSSING EQUIPMENT, AND MINE COUNTERMEASURES SYSTEMS.
		NO STATEMENT	0	
		DEGRADED	1	PARTIALLY OPERATIONAL.
		NOT OPERATIONAL	2	
		OPERATIONAL	3	
1665	033	ENERGY GENERATION SYSTEM- NUCLEAR -----		INDICATES THE STATUS OF THE NUCLEAR ENERGY GENERATION SYSTEM. INCLUDES THE REACTOR PLANT, COOLANT CONTROLS, INSTRUMENTATION, AND SHIELDING.
		NO STATEMENT	0	
		DEGRADED	1	PARTIALLY OPERATIONAL.
		NOT OPERATIONAL	2	
		OPERATIONAL	3	
1665	034	ENERGY GENERATION SYSTEM- CONVENTIONAL -----		INDICATES THE STATUS OF THE NON- NUCLEAR ENERGY GENERATION SYSTEM. INCLUDES PROPULSION BOILERS, GAS GENERATORS, MAIN PROPULSION BATTERIES, AND MAIN PROPULSION FUEL CELLS.
		NO STATEMENT	0	

FIELD CODING FOR J13.4C2

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1665	034	ENERGY GENERATION SYSTEM- CONVENTIONAL -----	(CONTINUED)	
		DEGRADED	1	PARTIALLY OPERATIONAL.
		NOT OPERATIONAL	2	
		OPERATIONAL	3	
268	001	ES FREQUENCY BAND A -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 0 THROUGH 250 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	002	ES FREQUENCY BAND B -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 250 THROUGH 500 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	003	ES FREQUENCY BAND C -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 500 THROUGH 1000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	004	ES FREQUENCY BAND D -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 1000 THROUGH 2000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	005	ES FREQUENCY BAND E -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 2000

5.3-235

MIL-STD-6016B

FIELD CODING FOR J13.4C2

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
268	005	ES FREQUENCY BAND E -----	(CONTINUED)	
		NO STATEMENT	0	THROUGH 3000 MHZ. NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	006	ES FREQUENCY BAND F -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 3000 THROUGH 4000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	007	ES FREQUENCY BAND G -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 4000 THROUGH 6000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	008	ES FREQUENCY BAND H -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 6000 THROUGH 8000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	009	ES FREQUENCY BAND I -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 8000 THROUGH 10,000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).

5.3-236

MIL-STD-6016B

FIELD CODING FOR J13.4C2

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
268	010	ES FREQUENCY BAND J -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 10,000 THROUGH 20,000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	011	ES FREQUENCY BAND K -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 20,000 THROUGH 40,000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	012	ES FREQUENCY BAND L -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 40,000 THROUGH 60,000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	013	ES FREQUENCY BAND M -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 60,000 THROUGH 100,000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	014	HF DIRECTION FINDER -----		INDICATES THE STATUS OF DIRECTION FINDER EQUIPMENT IN THE HF RANGE.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).

FIELD CODING FOR J13.4C2

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
268	015	VHF DIRECTION FINDER -----		INDICATES THE STATUS OF DIRECTION FINDER EQUIPMENT IN THE VHF RANGE.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	016	UHF DIRECTION FINDER -----		INDICATES THE STATUS OF DIRECTION FINDER EQUIPMENT IN THE UHF RANGE.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
1665	055	ACTIVE SONAR -----		INDICATES STATUS OF ACTIVE SONAR AND COMPONENTS.
		NO STATEMENT	0	
		DEGRADED	1	PARTIALLY OPERATIONAL.
		NOT OPERATIONAL	2	
		OPERATIONAL	3	
1665	056	HULL MOUNTED PASSIVE SONAR -----		INDICATES STATUS OF HULL MOUNTED PASSIVE SONAR AND COMPONENTS.
		NO STATEMENT	0	
		DEGRADED	1	PARTIALLY OPERATIONAL.
		NOT OPERATIONAL	2	
		OPERATIONAL	3	
1665	057	TOWED ARRAY SONAR -----		INDICATES STATUS OF TOWED ARRAY SONAR AND COMPONENTS.
		NO STATEMENT	0	
		DEGRADED	1	PARTIALLY OPERATIONAL.
		NOT OPERATIONAL	2	
		OPERATIONAL	3	

5.3-238

MIL-STD-6016B

MIL-STD-6016B

J13.5 MESSAGE SUMMARY

PURPOSE

The J13.5 Land (Ground) Platform and System Status Message provides the current operational weapons and equipment status of a land (ground) platform.

DATA ELEMENT SUMMARY

<u>J13.5I</u>		<u>J13.5C2</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	WORD FORMAT	2
LABEL, J-SERIES	5	CONTINUATION WORD LABEL	5
SUBLABEL, J-SERIES	3	ES FREQUENCY BAND A	2
MESSAGE LENGTH INDICATOR	3	ES FREQUENCY BAND B	2
OPERATIONAL CAPABILITY	2	ES FREQUENCY BAND C	2
TRACK NUMBER, REFERENCE	19	ES FREQUENCY BAND D	2
SITE TYPE	6	ES FREQUENCY BAND E	2
HOT INVENTORY	7	ES FREQUENCY BAND F	2
SAM MODE STATE	3	ES FREQUENCY BAND G	2
TIME FUNCTION	3	ES FREQUENCY BAND H	2
MINUTE	6	ES FREQUENCY BAND I	2
HOURL	5	ES FREQUENCY BAND J	2
PERIMETER ENGAGEMENT STATUS	1	ES FREQUENCY BAND K	2
SPARE	5	ES FREQUENCY BAND L	2
		ES FREQUENCY BAND M	2
		HF DIRECTION FINDER	2
		VHF DIRECTION FINDER	2
		UHF DIRECTION FINDER	2
		EA FREQUENCY BAND A	2
		EA FREQUENCY BAND B	2
		EA FREQUENCY BAND C	2
		EA FREQUENCY BAND D	2
		EA FREQUENCY BAND E	2
		EA FREQUENCY BAND F	2
		EA FREQUENCY BAND G	2
		EA FREQUENCY BAND H	2
		EA FREQUENCY BAND I	2
		EA FREQUENCY BAND J	2
		EA FREQUENCY BAND K	2
		EA FREQUENCY BAND L	2
		EA FREQUENCY BAND M	2
		DECOY, CHAFF	2
		DECOY, IR	2
		SPARE	1
<u>J13.5C1</u>			
DATA ELEMENT	# BITS		
WORD FORMAT	2		
CONTINUATION WORD LABEL	5		
COLD INVENTORY	7		
OPERATIONAL IMPAIRMENT	5		
NATO LINK 1 STATUS	2		
LINK 14 STATUS	2		
LINK 11 STATUS	3		
LINK 11B STATUS	2		
LINK 16 STATUS	3		
ATDL 1 STATUS	2		
IJMS STATUS	2		
COMMUNICATIONS IMPAIRMENT	3		
CONTROL POSITIONS	5		
TIME FUNCTION	3		
MINUTE	6		
HOURL	5		
PRIMARY SURVEILLANCE RADAR STATUS	2		
SECONDARY SURVEILLANCE RADAR STATUS	2		
TERTIARY SURVEILLANCE RADAR STATUS	2		
ACQUISITION RADAR STATUS	2		
ILLUMINATING RADAR STATUS	1		
MODE IV INTERROGATOR STATUS	1		
IFF/SIF INTERROGATOR STATUS	2		
SPARE	1		

MIL-STD-6016B

J13.5 TRANSMIT/RECEIVE RULES

TITLE: Land (Ground) Platform and System Status Message

TRANSMIT RULES

1. The J13.5 Land (Ground) Platform and System Status message shall be transmitted by JU platforms, by the controlling units of nonJU platforms, or by the C² JUs exercising control over JU platforms.
2. JU platforms shall transmit this message periodically at an RRN = 2 (3.2 minutes, 2.4-4 minute interval) or when any data change, but no more than once in any 48-second interval.
3. Controlling units of nonJU platforms and C² JUs exercising control over JU platforms not reporting their own status shall transmit this message periodically at an RRN = 0 (12.8 minutes, 9.6-12.8 minute interval).
4. The controlling units of nonJU platforms and C² JUs exercising control over land (ground) platforms shall transmit this message once in response to a J7.1 (Act = 0 or 1) Data Update Request message.
5. Only the J13.5CX continuation words appropriate to the platforms' equipment and stores inventory need be transmitted.
6. A platform reporting its own status shall set the Reference TN field to the same track number as TN, Source in the header word.
7. In the Time Function field of the J13.5I word, only values 0, 1, 3, 5, and 6 are legal for use. In the Time Function field of the J13.5C1 word, only values 0, 2, 4, and 7 are legal for use.

RECEIVE RULES

There are no receive rules specified for this message.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: LAND (GROUND) PLATFORM AND SYSTEM STATUS INITIAL WORD

:	49	48	47:	46	45	44	43	42	41	40:	39	38	37	36	35	34:	33	32	31	30	29	28	27	26	25		
:	SAM MODE			:							:	SITE TYPE						:									
:	STATE			:	HOT INVENTORY						:							:	--->								
:				:							:							:									
:	3			:	7						:	6						:									

:	69	68	67	66	65:	64:	63	62	61	60	59:	58	57	56	55	54	53:	52	51	50:			
:	SPARE					:	PES:	HOUR				:	MINUTE						:	TIME		:	
:	FUNCTION					:	:	FUNCTION				:	FUNCTION						:	FUNCTION		:	
:	5					:	1	:	5				:	6						:	3		:

WORD DESCRIPTION

WORD NUMBER: J13.5I

WORD TITLE: LAND (GROUND) PLATFORM AND SYSTEM STATUS INITIAL WORD

REFERENCE		BIT #	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0- 1 2	00
270 004	LABEL, J-SERIES	2- 6 5	01101
271 005	SUBLABEL, J-SERIES	7- 9 3	101
800 001	MESSAGE LENGTH INDICATOR	10- 12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
753 002	OPERATIONAL CAPABILITY (OP CAP)	13- 14 2	
769 002	TRACK NUMBER, REFERENCE	15- 33 19	
1555 001	SITE TYPE	34- 39 6	
408 015	HOT INVENTORY	40- 46 7	
1576 001	SAM MODE STATE	47- 49 3	
1681 001	TIME FUNCTION	50- 52 3	
797 004	MINUTE	53- 58 6	
792 001	HOURL	59- 63 5	
395 001	PERIMETER ENGAGEMENT STATUS (PES)	64 1	
756 005	SPARE	65- 69 5	

FIELD CODING FOR J13.5I (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
753	002	OPERATIONAL CAPABILITY -----		DESCRIBES THE OPERATIONAL CAPABILITY OF THE REPORTED PLATFORM OR SYSTEM.
		NO STATEMENT	0	
		FULLY OPERATIONAL	1	
		PARTIALLY OPERATIONAL	2	
		NONOPERATIONAL	3	
769	002	TRACK NUMBER, REFERENCE -----		A REFERENCE NUMBER USED TO ASSOCIATE INFORMATION AND DIRECTIVES WITH THE TRACK. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE- BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANNN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6
00111	7

FIELD CODING FOR J13.5I

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
				01000 A
				01001 B
				01010 C
				01011 D
				01100 E
				01101 F
				01110 G
				01111 H
				10000 J
				10001 K
				10010 L
				10011 M
				10100 N
				10101 P
				10110 Q
				10111 R
				11000 S
				11001 T
				11010 U
				11011 V
				11100 W
				11101 X
				11110 Y
				11111 Z
		00000	0	NO STATEMENT.
		00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		00077	63	ILLEGAL.
		00100-00175	64 THROUGH 125	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		00176	126	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		00177	127	COLLECTIVE ADDRESS.
		00200-07776	128 THROUGH 4094	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		07777	4095	ILLEGAL.
		0A000-0Z777	4096 THROUGH 16383	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.

FIELD CODING FOR J13.5I

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		10000-17777	16384 THROUGH 20479	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		20000-27777	32768 THROUGH 36863	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION

FIELD CODING FOR J13.5I

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		60000-67777	98304 THROUGH 102399	REPORTING, E.G., TRACKS AND REFERENCE POINTS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		70000-77776	114688 THROUGH 118782	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
1555	001	SITE TYPE -----		IDENTIFIES THE TYPE OF SITE BEING REPORTED IN THE MESSAGE.
		NO STATEMENT	0	
		ADOC	1	AIR DEFENSE TACTICAL OPERATIONS CENTER.
		SOC	2	SECTOR OPERATION CENTER.
		SOC/CRC	3	
		CRC	4	CONTROL AND REPORTING CENTER.
		CRP	5	CONTROL AND REPORTING POST.
		AEGIS	6	AIRBORNE EARLY WARNING GROUND INTERFACE SEGMENT.
		TACC (USAF)	7	TACTICAL AIR CONTROL CENTER.
		CRC/MCE	8	CRC/MODULAR CONTROL EQUIPMENT.
		SSSB	9	SHIP SHORE SHIP BUFFER.
		HIMAD BDE	10	HIGH TO MEDIUM ALTITUDE AIR DEFENSE BRIGADE.
		HIMAD BN	11	HIMAD BATTALION.
		PATRIOT BN ICC	12	PATRIOT BN INFORMATION COORDINATION CENTER.
		PATRIOT/ECS	13	PATRIOT ENGAGEMENT CONTROL STATION.

5.3-247

MIL-STD-6016B

FIELD CODING FOR J13.5I

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1555	001	SITE TYPE -----	(CONTINUED)	
		HAWK/AFP	14	HAWK ASSAULT FIRE PLATOON.
		SHORAD BDE	15	SHORT RANGE AIR DEFENSE BDE.
		SHORAD BN	16	
		SWC	17	COMPASS EARS.
		TACC (USMC)	18	TACTICAL AIR COMMAND CENTER.
		TADC	19	TACTICAL AIR DIRECTION CENTER.
		TAOC	20	TACTICAL AIR OPERATIONS CENTER.
		ROCC	21	REGIONAL OPERATIONS CONTROL CENTER.
		RADIL	22	ROCC AWACS DIGITAL INTERFACE LINK.
		ASIT	23	ADAPTABLE SURFACE INTERFACE TERMINAL.
		GCI	24	GROUND CONTROL INTERCEPT.
		MPC	25	MESSAGE PROCESSING CENTER.
		TOC	26	TACTICAL OPERATIONS CENTER.
		DIVARTY	27	DIVISION ARTILLERY.
		NIKE	28	
		GACC	29	GROUND ATTACK CONTROL CENTER.
		PLSS	30	PRECISION LOCATED STRIKE SYSTEM.
		ENSCE	31	ENEMY SITUATION CORRELATION ELEMENT.
		TGIF	32	TRANSPORTABLE GROUND INTERCEPT FACILITY.
		FACP	33	FORWARD AIR CONTROL POST.
		TOC (THAAD)	34	TACTICAL OPERATIONS CENTER (THEATER HIGH ALTITUDE AREA DEFENSE).
		LCS (THAAD)	35	LAUNCHER COMMUNICATIONS STATION (THEATER HIGH ALTITUDE AREA DEFENSE).
		SSI (THAAD)	36	SENSOR SYSTEM INTERFACE (THEATER HIGH ALTITUDE AREA DEFENSE).
		JTAGS	37	JOINT TACTICAL GROUND STATION.
		ADTOC/BN	38	AIR DEFENSE TACTICAL OPERATIONS CENTER, BATTALION.
		ADTOC/BDE	39	AIR DEFENSE TACTICAL OPERATIONS CENTER, BRIGADE.
		ADCP	40	AIR DEFENSE COMMUNICATIONS PLATFORM.
		BM DEFENSE SITE	41	BALLISTIC MISSILE DEFENSE SITE.
		UNDEFINED	42 THROUGH 63	
408	015	HOT INVENTORY -----		AN ESTIMATED AMOUNT OF HOT MISSILES REMAINING ON A WEAPON SYSTEM.
		0 THROUGH 125 MISSILES	0 THROUGH 125	IN ONE MISSILE INCREMENTS.
		GREATER THAN 125 MISSILES	126	

FIELD CODING FOR J13.5I

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
408	015	HOT INVENTORY ----- NO STATEMENT	(CONTINUED) 127	
1576	001	SAM MODE STATE ----- NO STATEMENT STANDBY TRANSITION TO OFF-LINE TRANSITION TO STANDBY TRANSITION OUT OF STANDBY TRANSITION TO ROAD MARCH REORIENTATION INITIALIZATION	 0 1 2 3 4 5 6 7	PROVIDES THE SPECIFIC STATE OF A PATRIOT OR HAWK SAM UNIT.
1681	001	TIME FUNCTION ----- NO STATEMENT ACTIVATION TIME DEACTIVATION TIME ARRIVAL TIME DEPARTURE TIME TIME POINT ESTABLISHED NON-OP TIME OP TIME	 0 1 2 3 4 5 6 7	USED IN CONJUNCTION WITH THE MINUTE AND HOUR FIELDS TO DESCRIBE THE TIME FUNCTION ASSOCIATED WITH THE REPORTED TIME. THE TIME THE REPORTED POSITION FOR THE POINT WAS ESTABLISHED. THIS MAY BE A TIME PRIOR TO DATA ENTRY. THE TIME THE SITE IS EXPECTED TO BECOME LESS THAN FULLY OPERATIONAL. THE TIME THE SITE IS EXPECTED TO RETURN FULLY OPERATIONAL.
797	004	MINUTE ----- 0 THROUGH 59 ILLEGAL NO STATEMENT	 0 THROUGH 59 60 THROUGH 62 63	THE MINUTE OF THE HOUR. IN ONE MINUTE INCREMENTS.
792	001	HOUR ---- 0 HOUR 1 THROUGH 23 HOURS ILLEGAL	 0 1 THROUGH 23 24 THROUGH 30	EXPRESSES TIME OF DAY OR A PERIOD OF TIME IN HOURS. IN ONE HOUR INCREMENTS.

FIELD CODING FOR J13.5I (SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
792	001	HOUR -----	(CONTINUED)	
		NO STATEMENT	31	
395	001	PERIMETER ENGAGEMENT STATUS -----		INDICATES WHETHER THE SYSTEM IS INITIATING MULTIPLE SIMULTANEOUS ENGAGEMENTS.
		OFF	0	THE REFERENCE TN IS NOT/OR IS NO LONGER INITIATING MULTIPLE SIMULTANEOUS ENGAGEMENTS.
		ON	1	THE REFERENCE TN IS INITIATING MULTIPLE SIMULTANEOUS ENGAGEMENTS WITH NO CAPABILITY TO PERFORM INDEPENDENT KILL ASSESSMENT, BUT WILL TRANSMIT W/ES OF FIRING AND ENGAGEMENT BROKEN FOR EACH MISSILE/TARGET PAIR.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J13.5C1

WORD TITLE: LAND (GROUND) EQUIPMENT STATUS CONTINUATION WORD

24	23:	22	21:	20	19:	18	17	16	15	14:	13	12	11	10	09	08	07:	06	05	04	03	02:	01	00:

LINK 11:LINK 14: NATO :				OPERATIONAL :				:				CONTINUATION WORD :				WORD :				:				
STATUS :STATUS :LINK 1 :				IMPAIRMENT :				COLD INVENTORY :				LABEL :				FORMAT :				:				

:				:				:				:				:				:				

3		:	2		:	2		:	5		:	7		:	5		:	2		:				

49	48	47	46:	45	44	43:	42	41	40	39	38:	37	36	35:	34	33:	32	31:	30	29	28:	27	26:	25	

MINUTE			:	TIME		:	CONTROL POSITIONS				:	COM IMP		:	IJMS		:	ATDL 1		:	LINK 16		:	LINK	
			:	FUNCTION		:					:			:	STATUS		:	STATUS		:	STATUS		:	11B	
			:			:					:			:			:			:			:	----	
			:			:					:			:			:			:			:		
6			:	3		:	5				:	3		:	2		:	2		:	3		:	2	

:	69:	68	67:	66:	65:	64	63:	62	61:	60	59:	58	57:	56	55	54	53	52:	51	50					

:	:	:M4 :ILR:				:	:	:	:	:	:	:	:	:	:	:				:	---				
:	SP :	IFF	INT:	INT:	STS:	AQR	STS:	TSR	STS:	SSR	STS:	PSR	STS:	:				HOUR :				---			

:	1	:	2	:	1	:	1	:	2	:	2	:	2	:	2	:	5	:							

WORD DESCRIPTION

WORD NUMBER: J13.5C1

WORD TITLE: LAND (GROUND) EQUIPMENT STATUS CONTINUATION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	01
1551	001	CONTINUATION WORD LABEL	2-	6 5	00001
408	014	COLD INVENTORY	7-	13 7	
1600	001	OPERATIONAL IMPAIRMENT	14-	18 5	
1625	001	NATO LINK 1 STATUS (NL1 STS)	19-	20 2	
1625	002	LINK 14 STATUS (L14 STS)	21-	22 2	
1625	003	LINK 11 STATUS	23-	25 3	
1625	004	LINK 11B STATUS (TB STS)	26-	27 2	
1625	005	LINK 16 STATUS	28-	30 3	
1625	006	ATDL 1 STATUS (ATDL STS)	31-	32 2	
1625	007	IJMS STATUS (IJMS STS)	33-	34 2	
1652	001	COMMUNICATIONS IMPAIRMENT (COM IMP)	35-	37 3	
1678	001	CONTROL POSITIONS	38-	42 5	
1681	001	TIME FUNCTION	43-	45 3	
797	004	MINUTE	46-	51 6	
792	001	HOUR	52-	56 5	
1665	010	PRIMARY SURVEILLANCE RADAR STATUS (PSR STS)	57-	58 2	
1665	011	SECONDARY SURVEILLANCE RADAR STATUS (SSR STS)	59-	60 2	
1665	012	TERTIARY SURVEILLANCE RADAR STATUS (TSR STS)	61-	62 2	
1665	013	ACQUISITION RADAR STATUS (AQR STS)	63-	64 2	
1665	014	ILLUMINATING RADAR STATUS (ILR STS)	65	1	
1665	015	MODE IV INTERROGATOR STATUS (M4 INT)	66	1	
1665	004	IFF/SIF INTERROGATOR STATUS (IFF INT)	67-	68 2	
756	001	SPARE (SP)	69	1	

FIELD CODING FOR J13.5C1

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
408	014	COLD INVENTORY ----- 0 THROUGH 125 MISSILES GREATER THAN 125 MISSILES NO STATEMENT	0 THROUGH 125 126 127	AN ESTIMATED AMOUNT OF COLD MISSILES REMAINING ON A WEAPON SYSTEM. IN ONE MISSILE INCREMENTS.
1600	001	OPERATIONAL IMPAIRMENT ----- NO STATEMENT SURVEILLANCE RADAR ACQUISITION RADAR TRACKING RADAR GUIDANCE RADAR MULTIFUNCTION RADAR HEIGHT FINDER RADAR ATC RADAR IFF/SIF INTERROGATOR MOBILITY PRIMARY POWER COMMUNICATIONS ES PASSIVE SENSOR MULTISTATIC PASSIVE SENSOR ORDNANCE DEPLETED LAUNCHER FAILURE TDS FAILURE UNDEFINED	 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 THROUGH 31	DEFINES THE PRIMARY SYSTEM COMPONENT THAT IS DEGRADING THE OPERATIONAL CAPABILITY OF THE PLATFORM OR SYSTEM.
1625	001	NATO LINK 1 STATUS ----- NO STATEMENT NOT AVAILABLE DEGRADED AVAILABLE	 0 1 2 3	INDICATES THE AVAILABILITY OF NATO LINK 1.
1625	002	LINK 14 STATUS ----- NO STATEMENT NOT AVAILABLE DEGRADED AVAILABLE	 0 1 2 3	INDICATES THE AVAILABILITY OF LINK 14.

FIELD CODING FOR J13.5C1

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1625	003	LINK 11 STATUS -----		INDICATES THE AVAILABILITY OF LINK 11.
		NO STATEMENT	0	
		AVAILABLE VIA LOCAL BUFFER	1	
		AVAILABLE VIA REMOTE BUFFER	2	
		AVAILABLE VIA LOCAL AND REMOTE BUFFER	3	
		DEGRADED	4	
		NOT AVAILABLE	5	
		UNDEFINED	6 THROUGH 7	
1625	004	LINK 11B STATUS -----		INDICATES THE AVAILABILITY OF LINK 11B.
		NO STATEMENT	0	
		NOT AVAILABLE	1	
		DEGRADED	2	
		AVAILABLE	3	
1625	005	LINK 16 STATUS -----		INDICATES THE AVAILABILITY OF LINK 16.
		NO STATEMENT	0	
		AVAILABLE VIA LOCAL BUFFER	1	
		AVAILABLE VIA REMOTE BUFFER	2	
		AVAILABLE VIA LOCAL AND REMOTE BUFFER	3	
		DEGRADED	4	
		NOT AVAILABLE	5	
		UNDEFINED	6 THROUGH 7	
1625	006	ATDL 1 STATUS -----		INDICATES THE AVAILABILITY OF ATDL 1.
		NO STATEMENT	0	
		NOT AVAILABLE	1	
		DEGRADED	2	
		AVAILABLE	3	
1625	007	IJMS STATUS -----		INDICATES THE AVAILABILITY OF IJMS.
		NO STATEMENT	0	
		NOT AVAILABLE	1	
		DEGRADED	2	

FIELD CODING FOR J13.5C1

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1625	007	IJMS STATUS ----- AVAILABLE	(CONTINUED) 3	
1652	001	COMMUNICATIONS IMPAIRMENT ----- NO STATEMENT UHF-AM VHF-AM VHF-FM HF-SSB UPPER HF UHF-FM HF-SSB LOWER	 0 1 2 3 4 5 6 7	DEFINES THE COMMUNICATIONS COMPONENT THAT IS CAUSING THE PLATFORM TO BE LESS THAN FULLY OPERATIONAL.
1678	001	CONTROL POSITIONS ----- 0 THROUGH 29 POSITIONS GREATER THAN 29 POSITIONS NO STATEMENT	0 THROUGH 29 30 31	INDICATES THE NUMBER OF OPERATOR/ CONTROL POSITIONS AVAILABLE. NUMBER OF POSITIONS IN INCREMENTS OF ONE.
1681	001	TIME FUNCTION ----- NO STATEMENT ACTIVATION TIME DEACTIVATION TIME ARRIVAL TIME DEPARTURE TIME TIME POINT ESTABLISHED NON-OP TIME OP TIME	 0 1 2 3 4 5 6 7	USED IN CONJUNCTION WITH THE MINUTE AND HOUR FIELDS TO DESCRIBE THE TIME FUNCTION ASSOCIATED WITH THE REPORTED TIME. THE TIME THE REPORTED POSITION FOR THE POINT WAS ESTABLISHED. THIS MAY BE A TIME PRIOR TO DATA ENTRY. THE TIME THE SITE IS EXPECTED TO BECOME LESS THAN FULLY OPERATIONAL. THE TIME THE SITE IS EXPECTED TO RETURN FULLY OPERATIONAL.
797	004	MINUTE ----- 0 THROUGH 59	0 THROUGH 59	THE MINUTE OF THE HOUR. IN ONE MINUTE INCREMENTS.

5.3-256

MIL-STD-6016B

FIELD CODING FOR J13.5C1

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
797	004	MINUTE ----- ILLEGAL NO STATEMENT	(CONTINUED) 60 THROUGH 62 63	
792	001	HOUR ---- 0 HOUR 1 THROUGH 23 HOURS ILLEGAL NO STATEMENT	 0 1 THROUGH 23 24 THROUGH 30 31	EXPRESSES TIME OF DAY OR A PERIOD OF TIME IN HOURS. IN ONE HOUR INCREMENTS.
1665	010	PRIMARY SURVEILLANCE RADAR STATUS ----- NO STATEMENT SYSTEM OPERATIONAL SYSTEM NON-OPERATIONAL SYSTEM OFF	 0 1 2 3	DESCRIBES THE OPERATING STATUS OF A PRIMARY SURVEILLANCE RADAR SYSTEM.
1665	011	SECONDARY SURVEILLANCE RADAR STATUS ----- NO STATEMENT SYSTEM OPERATIONAL SYSTEM NON-OPERATIONAL SYSTEM OFF	 0 1 2 3	DESCRIBES THE OPERATING STATUS OF A SECONDARY SURVEILLANCE RADAR SYSTEM.
1665	012	TERTIARY SURVEILLANCE RADAR STATUS ----- NO STATEMENT SYSTEM OPERATIONAL SYSTEM NON-OPERATIONAL SYSTEM OFF	 0 1 2 3	DESCRIBES THE OPERATING STATUS OF A TERTIARY SURVEILLANCE SYSTEM.
1665	013	ACQUISITION RADAR STATUS ----- NO STATEMENT SYSTEM OPERATIONAL SYSTEM NON-OPERATIONAL SYSTEM OFF	 0 1 2 3	DESCRIBES THE OPERATING STATUS OF AN ACQUISITION RADAR SYSTEM.
1665	014	ILLUMINATING RADAR STATUS -----		DESCRIBES THE OPERATING STATUS OF AN ILLUMINATING RADAR SYSTEM.

5.3-257

MIL-STD-6016B

FIELD CODING FOR J13.5C1

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1665	014	ILLUMINATING RADAR STATUS ----- NO STATEMENT SYSTEM OPERATIONAL	(CONTINUED) 0 1	
1665	015	MODE IV INTERROGATOR STATUS ----- NO STATEMENT SYSTEM OPERATIONAL	 0 1	DESCRIBES THE OPERATING STATUS OF A MODE IV INTERROGATOR SYSTEM.
1665	004	IFF/SIF INTERROGATOR STATUS ----- NO STATEMENT SYSTEM OPERATIONAL SYSTEM NON-OPERATIONAL SYSTEM OFF	 0 1 2 3	DESCRIBES THE OPERATING STATUS OF AN IFF/SIF INTERROGATOR.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J13.5C2

WORD TITLE: LAND (GROUND) ELECTRONIC WARFARE STATUS CONTINUATION WORD

: 24 23: 22 21: 20 19: 18 17: 16 15: 14 13: 12 11: 10 09: 08 07: 06 05 04 03 02: 01 00:																							
: ES I : ES H : ES G : ES F : ES E : ES D : ES C : ES B : ES A :												CONTINUATION WORD : WORD						: : : LABEL : : : : : : : :					
: 2 : 2 : 2 : 2 : 2 : 2 : 2 : 2 : 2 :												5						: 2 :					
49: 48 47: 46 45: 44 43: 42 41: 40 39: 38 37: 36 35: 34 33: 32 31: 30 29: 28 27: 26 25:																							
<---: EA E : EA D : EA C : EA B : EA A : UHF DF : VHF DF : HF DF :												ES M : ES L : ES K : ES J :						: : : : : :					
: 2 : 2 : 2 : 2 : 2 : 2 : 2 : 2 :												2 : 2 : 2 : 2 :						: 2 :					
												: 69: 68 67: 66 65: 64 63: 62 61: 60 59: 58 57: 56 55: 54 53: 52 51: 50											
: :DECOY, :DECOY, :												: : : : : :EA											
:SP : IR : CHAFF : EA M : EA L : EA K : EA J : EA I : EA H : EA G : F												: : : : : :											
: 1 : 2 : 2 : 2 : 2 : 2 : 2 :												2 : 2 : 2 : 2 :											

WORD DESCRIPTION

WORD NUMBER: J13.5C2

WORD TITLE: LAND (GROUND) ELECTRONIC WARFARE STATUS CONTINUATION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	01
1551	001	CONTINUATION WORD LABEL	2-	6 5	00010
268	001	ES FREQUENCY BAND A (ES A)	7-	8 2	
268	002	ES FREQUENCY BAND B (ES B)	9-	10 2	
268	003	ES FREQUENCY BAND C (ES C)	11-	12 2	
268	004	ES FREQUENCY BAND D (ES D)	13-	14 2	
268	005	ES FREQUENCY BAND E (ES E)	15-	16 2	
268	006	ES FREQUENCY BAND F (ES F)	17-	18 2	
268	007	ES FREQUENCY BAND G (ES G)	19-	20 2	
268	008	ES FREQUENCY BAND H (ES H)	21-	22 2	
268	009	ES FREQUENCY BAND I (ES I)	23-	24 2	
268	010	ES FREQUENCY BAND J (ES J)	25-	26 2	
268	011	ES FREQUENCY BAND K (ES K)	27-	28 2	
268	012	ES FREQUENCY BAND L (ES L)	29-	30 2	
268	013	ES FREQUENCY BAND M (ES M)	31-	32 2	
268	014	HF DIRECTION FINDER (HF DF)	33-	34 2	
268	015	VHF DIRECTION FINDER (VHF DF)	35-	36 2	
268	016	UHF DIRECTION FINDER (UHF DF)	37-	38 2	
272	001	EA FREQUENCY BAND A (EA A)	39-	40 2	
272	002	EA FREQUENCY BAND B (EA B)	41-	42 2	
272	003	EA FREQUENCY BAND C (EA C)	43-	44 2	
272	004	EA FREQUENCY BAND D (EA D)	45-	46 2	
272	005	EA FREQUENCY BAND E (EA E)	47-	48 2	
272	006	EA FREQUENCY BAND F (EA F)	49-	50 2	
272	007	EA FREQUENCY BAND G (EA G)	51-	52 2	
272	008	EA FREQUENCY BAND H (EA H)	53-	54 2	
272	009	EA FREQUENCY BAND I (EA I)	55-	56 2	
272	010	EA FREQUENCY BAND J (EA J)	57-	58 2	
272	011	EA FREQUENCY BAND K (EA K)	59-	60 2	
272	012	EA FREQUENCY BAND L (EA L)	61-	62 2	
272	013	EA FREQUENCY BAND M (EA M)	63-	64 2	
272	014	DECOY, CHAFF	65-	66 2	
272	015	DECOY, IR	67-	68 2	
756	001	SPARE (SP)	69	1	

FIELD CODING FOR J13.5C2

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
268	001	ES FREQUENCY BAND A -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 0 THROUGH 250 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	002	ES FREQUENCY BAND B -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 250 THROUGH 500 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	003	ES FREQUENCY BAND C -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 500 THROUGH 1000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	004	ES FREQUENCY BAND D -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 1000 THROUGH 2000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	005	ES FREQUENCY BAND E -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 2000 THROUGH 3000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).

FIELD CODING FOR J13.5C2

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
268	006	ES FREQUENCY BAND F -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 3000 THROUGH 4000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	007	ES FREQUENCY BAND G -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 4000 THROUGH 6000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	008	ES FREQUENCY BAND H -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 6000 THROUGH 8000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	009	ES FREQUENCY BAND I -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 8000 THROUGH 10,000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	010	ES FREQUENCY BAND J -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 10,000 THROUGH 20,000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).

FIELD CODING FOR J13.5C2

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
268	011	ES FREQUENCY BAND K -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 20,000 THROUGH 40,000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	012	ES FREQUENCY BAND L -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 40,000 THROUGH 60,000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	013	ES FREQUENCY BAND M -----		INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 60,000 THROUGH 100,000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	014	HF DIRECTION FINDER -----		INDICATES THE STATUS OF DIRECTION FINDER EQUIPMENT IN THE HF RANGE.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	015	VHF DIRECTION FINDER -----		INDICATES THE STATUS OF DIRECTION FINDER EQUIPMENT IN THE VHF RANGE.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
268	016	UHF DIRECTION FINDER -----		INDICATES THE STATUS OF DIRECTION FINDER EQUIPMENT IN THE UHF RANGE.

FIELD CODING FOR J13.5C2

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
268	016	UHF DIRECTION FINDER -----	(CONTINUED)	
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
272	001	EA FREQUENCY BAND A -----		INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 0 THROUGH 250 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
272	002	EA FREQUENCY BAND B -----		INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 250 THROUGH 500 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
272	003	EA FREQUENCY BAND C -----		INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 500 THROUGH 1000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
272	004	EA FREQUENCY BAND D -----		INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 1000 THROUGH 2000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).

FIELD CODING FOR J13.5C2

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
272	005	EA FREQUENCY BAND E -----		INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 2000 THROUGH 3000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
272	006	EA FREQUENCY BAND F -----		INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 3000 THROUGH 4000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
272	007	EA FREQUENCY BAND G -----		INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 4000 THROUGH 6000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
272	008	EA FREQUENCY BAND H -----		INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 6000 THROUGH 8000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
272	009	EA FREQUENCY BAND I -----		INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 8000 THROUGH 10,000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).

FIELD CODING FOR J13.5C2

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
272	010	EA FREQUENCY BAND J -----		INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 10,000 THROUGH 20,000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
272	011	EA FREQUENCY BAND K -----		INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 20,000 THROUGH 40,000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
272	012	EA FREQUENCY BAND L -----		INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 40,000 THROUGH 60,000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
272	013	EA FREQUENCY BAND M -----		INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 60,000 THROUGH 100,000 MHZ.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).
272	014	DECOY, CHAFF -----		INDICATES THE STATUS OF THE DECOY CHAFF.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).

FIELD CODING FOR J13.5C2 (SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
272	015	DECOY, IR -----		INDICATES THE STATUS OF THE INFRARED DECOY.
		NO STATEMENT	0	NO CAPABILITY.
		STATUS UP	1	MISSION CAPABLE.
		STATUS DOWN	2	NOT MISSION CAPABLE.
		STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).

TABLE J14-1. J14 Control Word Applicability Table

INITIAL WORD	SUBLABEL							
	J14.0I PARAMETRIC INFORMATION		J14.2I ELECTRONIC WARFARE CONTROL/COORDINATION					
EXTENSION WORD - 0	J14.0E0		J14.2E0					
CONTINUATION WORD - 0								
1	J14.0C1 PARAMETRIC INFORMATION WORD 1		J14.2C1 ELECTRONIC WARFARE CONTROL/COORDINATION WORD 1					
2	J14.0C2 PARAMETRIC INFORMATION WORD 2		J14.2C2 ELECTRONIC WARFARE CONTROL/COORDINATION WORD 2					
3	J14.0C3 PARAMETRIC INFORMATION WORD 3		J14.2C3 ELECTRONIC WARFARE CONTROL/COORDINATION WORD 3					
4	J14.0C4 PARAMETRIC INFORMATION WORD 4		J14.2C4 ELECTRONIC WARFARE CONTROL/COORDINATION WORD 4					
5	J14.0C5 PARAMETRIC INFORMATION WORD 5		J14.2C5 ELECTRONIC WARFARE CONTROL/COORDINATION WORD 5					
6	J14.0C6 PARAMETRIC INFORMATION WORD 6		J14.2C6 ELECTRONIC WARFARE CONTROL/COORDINATION WORD 6					
7			J14.2C7 ELECTRONIC WARFARE CONTROL/COORDINATION WORD 7					
8			J14.2C8 ELECTRONIC WARFARE CONTROL/COORDINATION WORD 8					
...								
31								

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

J14.0 MESSAGE SUMMARY

PURPOSE

The J14.0 Parametric Information message provides the means to exchange parametric information that has been derived from electromagnetic sources.

DATA ELEMENT SUMMARY

<u>J14.0I</u>		<u>J14.0C1 (Continued)</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	SPARE(3)*****	
LABEL, J-SERIES	5	ELEVATION ANGLE(10)	* 13
SUBLABEL, J-SERIES	3	ALTITUDE, 25 FT(13)*****	
MESSAGE LENGTH INDICATOR	3	COURSE	9
THREAT EVALUATION	3	SPEED	11
RESPONSE INDICATOR, EWAC	1	SPARE	1
SPECIAL PROCESSING INDICATOR	1		
AGILE EMITTER	1	<u>J14.0C2</u>	
TRACK NUMBER, REFERENCE/INDEX	1	DATA ELEMENT	# BITS
NUMBER INDICATOR		WORD FORMAT	2
TRACK NUMBER, REFERENCE(19)****		CONTINUATION WORD LABEL	5
INDEX NUMBER(6)	* 19	LATITUDE, 0.0051 MINUTE	21
SPARE(13)*****		LONGITUDE, 0.0051 MINUTE	22
BEARING ORIGIN	1	AREA MAJOR AXIS	6
SQUARE/CIRCLE SWITCH	2	AREA MINOR AXIS	6
FIX OR BEARING DESCRIPTOR	3	AXIS ORIENTATION	8
SECOND	6		
MINUTE	6	<u>J14.0C3</u>	
HOUR	5	DATA ELEMENT	# BITS
REQUEST NUMBER	3	WORD FORMAT	2
ENVIRONMENT/CATEGORY	3	CONTINUATION WORD LABEL	5
LOCK-ON	2	EMITTER FUNCTION	7
		MODE NUMBER	6
		MODULATION CODE	4
<u>J14.0E0</u>		MULTIPLE EVALUATION	1
DATA ELEMENT	# BITS	SPARE	2
WORD FORMAT	2	BROAD CLASSIFICATION	3
TRACK NUMBER, ORIGIN	19	AMPLIFYING CHARACTERISTICS	3
FREQUENCY/FREQUENCY RANGE	1	SPARE	14
INDICATOR		EMITTER CONFIDENCE	3
FREQUENCY MULTIPLIER, 1	4	EMITTER NUMBER	16
FREQUENCY, 1	20	EMITTER NUMBER INDICATOR	3
FREQUENCY MULTIPLIER, 2	4	WARTIME RESERVE MODE INDICATOR	1
FREQUENCY, 2	20		
		<u>J14.0C4</u>	
<u>J14.0C1</u>		DATA ELEMENT	# BITS
DATA ELEMENT	# BITS	WORD FORMAT	2
WORD FORMAT	2	CONTINUATION WORD LABEL	5
CONTINUATION WORD LABEL	5	PRF/PRI INDICATOR	1
PARAMETER SOURCE	3	PULSE REPETITION FREQUENCY(23)*	23
BEARING ACCURACY	4	PULSE REPETITION INTERVAL(23)**	
BEARING	12	PULSE WIDTH	14
SECTOR WIDTH	8	JITTER	2
ELEVATION ANGLE/ALTITUDE	2	SCAN TYPE	5
INDICATOR			

MIL-STD-6016B

J14.0 MESSAGE SUMMARY (Continued)

DATA ELEMENT SUMMARY (Continued)

J14.0C4 (Continued)

DATA ELEMENT	# BITS
ANTENNA SCAN RATE/PERIOD	2
INDICATOR	
ANTENNA SCAN RATE(10)*****	10
ANTENNA SCAN PERIOD(10)*****	
POLARIZATION	3
JAMMER RECEIVED SIGNAL LEVEL	3

J14.0C5

DATA ELEMENT	# BITS
WORD FORMAT	2
CONTINUATION WORD LABEL	5
NATIONALITY/ALLIANCE OF TRACK	7
PLATFORM EVALUATION CONFIDENCE	3
SPACE PLATFORM(6)*****	
AIR PLATFORM(6)	*
SURFACE (MARITIME) PLATFORM(6)*	
SUBSURFACE (MARITIME)	*
PLATFORM(6)	*
LAND (GROUND) PLATFORM(6)	*
SPARE(6)*****	6
SPACE PLATFORM ACTIVITY(7)*****	
AIR PLATFORM ACTIVITY(7)	*
SURFACE (MARITIME) PLATFORM	*
ACTIVITY(7)	*
SUBSURFACE (MARITIME) PLATFORM*	
ACTIVITY(7)	*
LAND (GROUND) PLATFORM	*
ACTIVITY(7)	*
SPARE(7)*****	7
SPACE SPECIFIC TYPE(12)*****	
AIR SPECIFIC TYPE(12)	*
SURFACE (MARITIME) SPECIFIC	*
TYPE(12)	*
SUBSURFACE (MARITIME) SPECIFIC*	
TYPE(12)	*
LAND (GROUND) SPECIFIC	*
TYPE(12)	*
SPARE(12)*****	12
SPARE	16
LOCAL DISCRETE IDENTIFIER	12

J14.0C6

DATA ELEMENT	# BITS
WORD FORMAT	2
CONTINUATION WORD LABEL	5
CALLSIGN, OBSERVED	60
SPARE	3

J14.0 TRANSMIT/RECEIVE RULES

TITLE: Parametric Information Message

TRANSMIT RULES

1. The J14.0 Parametric Information message shall be transmitted by C² EW JUs and nonC² EW JUs either autonomously or in response to commands and requests for parametric information.

2. The J14.0 Parametric Information message may be transmitted autonomously when tactically significant information is available. It shall report the latest locally derived information by transmitting the appropriate J14.0 continuation word(s).

3. Additionally, a C² EW JU or nonC² EW JU shall transmit the J14.0 message under the following conditions:

a. When information for at least one field in the message has been locally derived.

b. Upon operator action to transmit data link received information for a track when no local information is available.

c. In conjunction with a J14.2 Electronic Warfare Control/Coordination message to provide parameters pertaining to EW Action Values 1, 2 and 12.

d. When requested by a J14.2 Electronic Warfare Control/Coordination message with an appropriate value set in the Electronic Warfare Action Value field.

4. The J14.0 message is transmitted once:

a. When initiated.

b. Periodically at an RRN = 4 (48 seconds, 36-60 second interval). The periodic timer shall be restarted when a J14.0 transmission is made due to data change or operator action in accordance with transmit rule 4c below.

J14.0 TRANSMIT/RECEIVE RULES (Continued)

TRANSMIT RULES (Continued)

c. When any of the below listed elements change, or an operator action is taken to transmit the J14.0:

- (1) FIX OR BEARING DESCRIPTOR.
- (2) THREAT EVALUATION.
- (3) SPECIAL PROCESSING INDICATOR.
- (4) ENVIRONMENT/CATEGORY.
- (5) BROAD CLASSIFICATION.
- (6) AMPLIFYING CHARACTERISTICS.
- (7) LOCK-ON.
- (8) FREQUENCY ($> 1\%$)*.
- (9) BEARING ($> 5^\circ$, or system accuracy, whichever is greater)*.
- (10) COURSE ($> 45^\circ$)*.
- (11) SPEED (> 50 DMH AIR, 5 DMH OTHER)*.
- (12) MODE NUMBER.
- (13) EMITTER NUMBER.
- (14) WARTIME RESERVE INDICATOR.
- (15) PRF/PRI ($>1\%$)*.
- (16) NATIONALITY/ALLIANCE.
- (17) PLATFORM.
- (18) SPECIFIC TYPE.
- (19) LOCAL DISCRETE IDENTIFIER.
- (20) CALL SIGN, OBSERVED.

5. The Bearing Accuracy field shall be set to a value other than a No Statement value when Bearing (other than Bearing Unknown) is reported.

6. When a J14.0 message is transmitted in response to a J14.2 message with EW Action Value field = 0, the received Periodicity of Report data element shall be used in lieu of Transmit Rule 4.

* Unless another change criterion is pre-selected by operator action.

J14.0 TRANSMIT/RECEIVE RULES (Continued)

7. Table J14-2 shows the word sequences needed for example combinations of parameters requiring more than three words, when transmissions are restricted to three words per time slot and when more than three words per time slot are available. The table does not cover all possible combinations of parameters that can be used.

RECEIVE RULES

The acceptance of remote information shall be optional when locally derived information is available. However, the rejection of remote information must require operator action and the subsequent transmission of locally derived information. The information in the last J14.0 message received must be accepted, if the applicable field is implemented, when locally derived information is not available.

TABLE J14-2 Required Word Sequences For Example J14.0 Messages Requiring More Than Three Words
(Sheet 1 of 7)

Serial	Type of Transmission ⁽¹⁾	Limit of 3 Words Per Time Slot	More Than 3 Words Available Per Time Slot (Maximum 6)
1	F/B=0 or 1. Reporting an EW fix or AOP with: associated frequency; and altitude, course and/or speed.	J14.0I/J14.0E0/J14.0C1, followed by a J14.0I/J14.0C2 sequence.	J14.0I/J14.0E0/J14.0C1/J14.0C2
2	F/B=0 or 1. Reporting an EW fix or AOP with: associated frequency; and platform and/or nationality/alliance data.	J14.0I/J14.0E0/J14.0C2, followed by a J14.0I/J14.0C5 sequence.	J14.0I/J14.0E0/J14.0C2/J14.0C5
3	F/B=0 or 1. Reporting an EW fix or AOP with associated frequency and observed callsign.	J14.0I/J14.0E0/J14.0C2, followed by a J14.0I/J14.0C6 sequence.	J14.0I/J14.0E0/J14.0C2/J14.0C6
4	F/B=0 or 1. Reporting an EW fix or AOP with: associated frequency; altitude, course and/or speed; and platform and/or nationality/alliance data.	J14.0I/J14.0E0/J14.0C1, followed by a J14.0I/J14.0C2/J14.0C5 sequence.	J14.0I/J14.0E0/J14.0C1/J14.0C2/J14.0C5
5	F/B=0 or 1. Reporting an EW fix or AOP with: associated frequency; altitude, course and/or speed; platform and/or nationality/alliance; and observed callsign.	J14.0I/J14.0E0/J14.0C1, followed by J14.0I/J14.0C2/J14.0C5 and J14.0I/J14.0C6 sequences.	J14.0I/J14.0E0/J14.0C1/J14.0C2/J14.0C5/J14.0C6
6	F/B=0 or 1. Reporting an EW fix or AOP with: associated frequency; platform and/or nationality/alliance; and observed callsign.	J14.0I/J14.0E0/J14.0C2, followed by a J14.0I/J14.0C5/J14.0C6 sequence.	J14.0I/J14.0E0/J14.0C2/J14.0C5/J14.0C6

TABLE J14-2 Required Word Sequences For Example J14.0 Messages Requiring More Than Three Words
(Sheet 2 of 7)

Serial	Type of Transmission ⁽¹⁾	Limit of 3 Words Per Time Slot	More Than 3 Words Available Per Time Slot (Maximum 6)
7	F/B=0 or 1. Reporting an EW fix or AOP with: associated frequency; altitude, course and/or speed; and observed callsign.	J14.0I/J14.0E0/J14.0C1, followed by a J14.0I/J14.0C2/J14.0C6 sequence.	J14.0I/J14.0E0/J14.0C1/J14.0C2/J14.0C6
8	F/B=3. Reporting an ESM bearing with associated emitter number and confidence.	Origin=Lat/Long: J14.0I/J14.0C1/J14.0C2, followed by a J14.0I/J14.0C3 sequence. Origin=TN: J14.0I/J14.0E0/J14.0C1, followed by a J14.0I/J14.0C2/J14.0C3 sequence.	Origin=Lat/Long: J14.0I/J14.0C1/J14.0C2/J14.0C3 Origin=TN: J14.0I/J14.0E0/J14.0C1/J14.0C2/J14.0C3
9	F/B=3. Reporting an ESM bearing with associated platform and/or nationality/alliance data.	Origin=Lat/Long: J14.0I/J14.0C1/J14.0C2, followed by a J14.0I/J14.0C5 sequence. Origin=TN: J14.0I/J14.0E0/J14.0C1, followed by a J14.0I/J14.0C2/J14.0C5 sequence.	Origin=Lat/Long: J14.0I/J14.0C1/J14.0C2/J14.0C5 Origin=TN: J14.0I/J14.0E0/J14.0C1/J14.0C2/J14.0C5
10	F/B=3. Reporting an ESM bearing with: associated emitter number and confidence; and platform and/or nationality/alliance data.	Origin=Lat/Long: J14.0I/J14.0C1/J14.0C2, followed by a J14.0I/J14.0C3/J14.0C5 sequence. Origin=TN: J14.0I/J14.0E0/J14.0C1, followed by a J14.0I/J14.0C2/J14.0C3 and J14.0I/J14.0C5 sequences.	Origin=Lat/Long: J14.0I/J14.0C1/J14.0C2/J14.0C3/J14.0C5 Origin=TN: J14.0I/J14.0E0/J14.0C1/J14.0C2/J14.0C3/J14.0C5
11	F/B=3. Reporting an ESM bearing with associated frequency.	J14.0I/J14.0E0/J14.0C1, followed by a J14.0I/J14.0C2 sequence.	J14.0I/J14.0E0/J14.0C1/J14.0C2.

TABLE J14-2 Required Word Sequences For Example J14.0 Messages Requiring More Than Three Words
(Sheet 3 of 7)

Serial	Type of Transmission ⁽¹⁾	Limit of 3 Words Per Time Slot	More Than 3 Words Available Per Time Slot (Maximum 6)
12	F/B=3. Reporting an ESM bearing with: associated frequency; and emitter characteristics, function and/or mode.	J14.0I/J14.0E0/J14.0C1, followed by a J14.0I/J14.0C2/J14.0C3 sequence.	J14.0I/J14.0E0/J14.0C1/J14.0C2/J14.0C3
13	F/B=3. Reporting an ESM bearing with: associated frequency; and pulse and/or antenna data.	J14.0I/J14.0E0/J14.0C1, followed by a J14.0I/J14.0C2/J14.0C4 sequence.	J14.0I/J14.0E0/J14.0C1/J14.0C2/J14.0C4
14	F/B=3. Reporting an ESM bearing with: associated frequency; and platform and/or nationality/alliance data.	J14.0I/J14.0E0/J14.0C1, followed by a J14.0I/J14.0C2/J14.0C5 sequence.	J14.0I/J14.0E0/J14.0C1/J14.0C2/J14.0C5
15	F/B=3. Reporting an ESM bearing with associated emitter characteristics, function and/or mode.	<u>Origin=Lat/Long:</u> J14.0I/J14.0C1/J14.0C2, followed by a J14.0I/J14.0C3 sequence. <u>Origin=TN:</u> J14.0I/J14.0E0/J14.0C1, followed by a J14.0I/J14.0C2/J14.0C3 sequence.	<u>Origin=Lat/Long:</u> J14.0I/J14.0C1/J14.0C2/J14.0C3 <u>Origin=TN</u> J14.0I/J14.0E0/J14.0C1/J14.0C2/J14.0C3
16	F/B=3. Reporting an ESM bearing with: associated emitter characteristics, function and/or mode; and pulse and/or antenna data.	<u>Origin=Lat/Long:</u> J14.0I/J14.0C1/J14.0C2, followed by J14.0I/J14.0C3/J14.0C4 sequence. <u>Origin=TN:</u> J14.0I/J14.0E0/J14.0C1, followed by J14.0I/J14.0C2/J14.0C3 and J14.0I/J14.0C4 sequences.	<u>Origin=Lat/Long:</u> J14.0I/J14.0C1/J14.0C2/J14.0C3/J14.0C4 <u>Origin=TN:</u> J14.0I/J14.0E0/J14.0C1/J14.0C2/J14.0C3/J14.0C4

TABLE J14-2 Required Word Sequences For Example J14.0 Messages Requiring More Than Three Words
(Sheet 4 of 7)

Serial	Type of Transmission ⁽¹⁾	Limit of 3 Words Per Time Slot	More Than 3 Words Available Per Time Slot (Maximum 6)
17	F/B=3. Reporting an ESM bearing with: associated emitter characteristics, function and/or mode; and platform and/or nationality/alliance data.	<u>Origin=Lat/Long:</u> J14.0I/J14.0C1/J14.0C2, followed by a J14.0I/J14.0C3/J14.0C5 sequence. <u>Origin=TN:</u> J14.0I/J14.0E0/J14.0C1, followed by J14.0I/J14.0C2/J14.0C3 and J14.0I/J14.0C5 sequences.	<u>Origin=Lat/Long:</u> J14.0I/J14.0C1/J14.0C2/J14.0C3/J14.0C5 <u>Origin=TN:</u> J14.0I/J14.0E0/J14.0C1/J14.0C2/J14.0C3/J14.0C5
18	F/B=3. Reporting an ESM bearing with associated pulse and/or antenna data.	<u>Origin=Lat/Long:</u> J14.0I/J14.0C1/J14.0C2, followed by a J14.0I/J14.0C4 sequence. <u>Origin=TN:</u> J14.0I/J14.0E0/J14.0C1, followed by a J14.0I/J14.0C2/J14.0C4 sequence.	<u>Origin=Lat/Long:</u> J14.0I/J14.0C1/J14.0C2/J14.0C4 <u>Origin=TN:</u> J14.0I/J14.0E0/J14.0C1/J14.0C2/J14.0C4
19	F/B=3. Reporting an ESM bearing with: associated pulse and/or antenna data; and platform and/or nationality/alliance data.	<u>Origin=Lat/Long:</u> J14.0I/J14.0C1/J14.0C2, followed by a J14.0I/J14.0C4/J14.0C5 sequence. <u>Origin=TN:</u> J14.0I/J14.0E0/J14.0C1, followed by J14.0I/J14.0C2/J14.0C4 and J14.0I/J14.0C5 sequences.	<u>Origin=Lat/Long:</u> J14.0I/J14.0C1/J14.0C2/J14.0C4/J14.0C5 <u>Origin=TN:</u> J14.0I/J14.0E0/J14.0C1/J14.0C2/J14.0C4/J14.0C5
20	F/B=3. Reporting ESM bearing with: associated frequency; emitter characteristics, function and/or mode; and pulse and/or antenna data.	J14.0I/J14.0E0/J14.0C1, followed by J14.0I/J14.0C2/J14.0C3 and J14.0I/J14.0C4 sequences.	J14.0I/J14.0E0/J14.0C1/J14.0C2/J14.0C3/J14.0C4

TABLE J14-2 Required Word Sequences For Example J14.0 Messages Requiring More Than Three Words
(Sheet 5 of 7)

Serial	Type of Transmission ⁽¹⁾	Limit of 3 Words Per Time Slot	More Than 3 Words Available Per Time Slot (Maximum 6)
21	F/B=3. Reporting ESM bearing with: associated frequency; emitter characteristics, function and/or mode; and platform and/or nationality/alliance data.	J14.0I/J14.0E0/J14.0C1, followed by J14.0I/J14.0C2/J14.0C3 and J14.0I/J14.0C5 sequences.	J14.0I/J14.0E0/J14.0C1/J14.0C2/J14.0C3/J14.0C5
22	F/B=3. Reporting ESM bearing with: associated emitter characteristics, function and/or mode; pulse and/or antenna data; and platform and/or nationality/alliance data.	Origin=Lat/Long: J14.0I/J14.0C1/J14.0C2, followed by J14.0I/J14.0C3/J14.0C4 and J14.0I/J14.0C5 sequences. Origin=TN: J14.0I/J14.0E0/J14.0C1, followed by J14.0I/J14.0C2/J14.0C3 and J14.0I/J14.0C4/J14.0C5 sequences.	Origin=Lat/Long: J14.0I/J14.0C1/J14.0C2/J14.0C3/J14.0C4/ J14.0C5 Origin=TN: J14.0I/J14.0E0/J14.0C1/J14.0C2/J14.0C3/J14.0C4, followed by a J14.0I/J14.0C5 sequence. ⁽²⁾
23	F/B=3. Reporting ESM bearing with: associated frequency; emitter characteristics, function and/or mode; pulse and/or antenna data; and platform and/or nationality/alliance data.	J14.0I/J14.0E0/J14.0C1, followed by J14.0I/J14.0C2/J14.0C3 and J14.0I/J14.0C4/J14.0C5 sequence.	J14.0I/J14.0E0/J14.0C1/J14.0C2/J14.0C3/J14.0C4, followed by a J14.0I/J14.0C5 sequence. ⁽²⁾
24	F/B=4. Reporting ECM bearing with associated frequency/range.	J14.0I/J14.0E0/J14.0C1, followed by a J14.0I/J14.0C2 sequence.	J14.0I/J14.0E0/J14.0C1/J14.0C2
25	F/B=4. Reporting ECM bearing with associated JRSL.	Origin=Lat/Long: J14.0I/J14.0C1/J14.0C2, followed by a J14.0I/J14.0C4 sequence. Origin=TN: J14.0I/J14.0E0/J14.0C1, followed by a J14.0I/J14.0C2/J14.0C4 sequence.	Origin=Lat/Long: J14.0I/J14.0C1/J14.0C2/J14.0C4 Origin=TN: J14.0I/J14.0E0/J14.0C1/J14.0C2/J14.0C4

TABLE J14-2 Required Word Sequences For Example J14.0 Messages Requiring More Than Three Words
(Sheet 6 of 7)

Serial	Type of Transmission ⁽¹⁾	Limit of 3 Words Per Time Slot	More Than 3 Words Available Per Time Slot (Maximum 6)
26	F/B=4. Reporting ECM bearing with associated frequency/range and JRSL.	J14.0I/J14.0E0/J14.0C1, followed by a J14.0I/J14.0C2/J14.0C4 sequence.	J14.0I/J14.0E0/J14.0C1/J14.0C2/J14.0C4
27	F/B=5. Reporting an RDF bearing with associated frequency.	J14.0I/J14.0E0/J14.0C1, followed by a J14.0I/J14.0C2 sequence.	J14.0I/J14.0E0/J14.0C1/J14.0C2
28	F/B=5. Reporting an RDF bearing with associated platform and/or nationality/alliance data.	Origin=Lat/Long: J14.0I/J14.0C1/J14.0C2, followed by a J14.0I/J14.0C5 sequence. Origin=TN: J14.0I/J14.0E0/J14.0C1, followed by a J14.0I/J14.0C2/J14.0C5 sequence.	Origin=Lat/Long: J14.0I/J14.0C1/J14.0C2/J14.0C5 Origin=TN: J14.0I/J14.0E0/J14.0C1/J14.0C2/J14.0C5
29	F/B=5. Reporting an RDF bearing with associated callsign.	Origin=Lat/Long: J14.0I/J14.0C1/J14.0C2, followed by a J14.0I/J14.0C6 sequence. Origin=TN: J14.0I/J14.0E0/J14.0C1, followed by a J14.0I/J14.0C2/J14.0C6 sequence.	Origin=Lat/Long: J14.0I/J14.0C1/J14.0C2/J14.0C6 Origin=TN: J14.0I/J14.0E0/J14.0C1/J14.0C2/J14.0C6
30	F/B=5. Reporting an RDF bearing with: associated frequency; and platform and/or nationality/alliance data.	J14.0I/J14.0E0/J14.0C1, followed by a J14.0I/J14.0C2/J14.0C5 sequence.	J14.0I/J14.0E0/J14.0C1/J14.0C2/J14.0C5
31	F/B=5. Reporting an RDF bearing with associated frequency and callsign.	J14.0I/J14.0E0/J14.0C1, followed by J14.0I/J14.0C2/J14.0C6 sequence.	J14.0I/J14.0E0/J14.0C1/J14.0C2/J14.0C6

TABLE J14-2 Required Word Sequences For Example J14.0 Messages Requiring More Than Three Words
(Sheet 7 of 7)

Serial	Type of Transmission ⁽¹⁾	Limit of 3 Words Per Time Slot	More Than 3 Words Available Per Time Slot (Maximum 6)
32	F/B=5. Reporting an RDF bearing with: associated platform and/or nationality/alliance data; and callsign.	Origin=Lat/Long: J14.0I/J14.0C1/J14.0C2, followed by a J14.0I/J14.0C5/J14.0C6 sequence. Origin=TN: J14.0I/J14.0E0/J14.0C1, followed by J14.0I/J14.0C2/J14.0C5 and J14.0I/J14.0C6 sequences.	Origin=Lat/Long: J14.0I/J14.0C1/J14.0C2/J14.0C5/J14.0C6 Origin=TN: J14.0I/J14.0E0/J14.0C1/J14.0C2/J14.0C5/J14.0C6
33	F/B=5. Reporting an RDF bearing with: associated frequency; platform and/or nationality/alliance data; and callsign.	J14.0I/J14.0E0/J14.0C1, followed by J14.0I/J14.0C2/J14.0C5 and J14.0I/J14.0C6 sequences.	J14.0I/J14.0E0/J14.0C1/J14.0C2/J14.0C5/J14.0C6

Notes:

1. This table assumes that, for bearings, even when the origin is reported as at TN Origin (Bearing Origin set to value 0), the origin is also given in Latitude and Longitude, as required by the Minimum Implementation.
2. If more than 6 words are available per time slot, a single J14.0I/J14.0E0/J14.0C1/J14.0C2/J14.0C3/J14.0C4/J14.0C5 sequence may be transmitted.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: PARAMETRIC INFORMATION INITIAL WORD

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25			
SECOND				:	FIX OR	:	SQUARE/	:	BNG	:	TRACK NUMBER, REFERENCE																
				:	BEARING	:	CIRCLE	:	ORG	:																	
				:	DESCRIPTOR	:	SWITCH	:	:	:	SPARE														:	---	>
6				:	3	:	2	:	1	:	19																

:	69	:	68:	67	:	66	:	65:	64	:	63	:	62:	61	:	60	:	59	:	58	:	57:	56	:	55	:	54	:	53	:	52	:	51:	50	
:		:			:		:		REQUEST	:		:			:		:		:		:		:		:			MINUTE	:		:			:	
:	LOCK-ON:	:		ENV/CAT	:		:		NUMBER	:		:			:	HOUR	:		:		:		:		:					:					:
:		:			:		:			:		:			:		:		:		:		:		:					:					:
:	2	:		3	:		:		3	:		:			:	5	:		:		:		:		:			6	:					:	

WORD DESCRIPTION

WORD NUMBER: J14.0I

WORD TITLE: PARAMETRIC INFORMATION INITIAL WORD

REFERENCE DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	00
270 004	LABEL, J-SERIES	2-	6 5	01110
271 005	SUBLABEL, J-SERIES	7-	9 3	000
800 001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
424 003	THREAT EVALUATION	13-	15 3	
710 002	RESPONSE INDICATOR, EWAC (REP IND)	16	1	
292 002	SPECIAL PROCESSING INDICATOR (SPI)	17	1	
1502 001	AGILE EMITTER (AG EMT)	18	1	
381 001	TRACK NUMBER, REFERENCE/INDEX NUMBER INDICATOR (TNR INI)	19	1	
769 002	TRACK NUMBER, REFERENCE	20-	38 19	
768 002	INDEX NUMBER	20-	25 6	
756 013	SPARE	26-	38 13	
1811 001	BEARING ORIGIN (BNG ORG)	39	1	
351 009	SQUARE/CIRCLE SWITCH (S/C SW)	40-	41 2	
382 004	FIX OR BEARING DESCRIPTOR (FIX BRG)	42-	44 3	
380 001	SECOND	45-	50 6	
797 004	MINUTE	51-	56 6	
792 001	HOUR	57-	61 5	
1809 001	REQUEST NUMBER	62-	64 3	
275 004	ENVIRONMENT/CATEGORY (ENV/CAT)	65-	67 3	
429 001	LOCK-ON	68-	69 2	

FIELD CODING FOR J14.0I

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
424	003	THREAT EVALUATION -----		INDICATES WHETHER OR NOT AN EMITTER IS A THREAT.
		PENDING/NO STATEMENT	0	
		UNKNOWN	1	
		NON-THREAT	2	
		THREAT	3	
		FRIEND	4	
		UNDEFINED	5 THROUGH 7	
710	002	RESPONSE INDICATOR, EWAC -----		
		NO STATEMENT	0	
		RESPONSE TO REQUEST	1	
292	002	SPECIAL PROCESSING INDICATOR -----		INDICATES THAT A MESSAGE REQUIRES SPECIAL PROCESSING.
		SPECIAL PROCESSING NOT REQUIRED	0	
		SPECIAL PROCESSING REQUIRED	1	
1502	001	AGILE EMITTER -----		
		NO STATEMENT	0	
		AGILE EMITTER	1	THE REPORTED PARAMETRIC INFORMATION IS AN ADDITIONAL SET OF DATA WHICH IS IDENTIFIED AS EMANATING FROM THE SAME EMITTER AS THE INFORMATION PREVIOUSLY REPORTED.
381	001	TRACK NUMBER, REFERENCE/INDEX NUMBER INDICATOR -----		INDICATES WHETHER TRACK NUMBER REFERENCE OR INDEX NUMBER IS BEING REPORTED.
		TRACK NUMBER, REFERENCE IS BEING REPORTED	0	TRACK NUMBER, REFERENCE IS BEING REPORTED.
		INDEX NUMBER IS BEING REPORTED	1	INDEX NUMBER IS BEING REPORTED.
769	002	TRACK NUMBER, REFERENCE -----		A REFERENCE NUMBER USED TO ASSOCIATE INFORMATION AND DIRECTIVES WITH THE TRACK. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	

FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE-BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANNN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6
00111	7
01000	A
01001	B
01010	C
01011	D
01100	E
01101	F
01110	G
01111	H
10000	J
10001	K
10010	L
10011	M
10100	N

FIELD CODING FOR J14.0I

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
				10101 P
				10110 Q
				10111 R
				11000 S
				11001 T
				11010 U
				11011 V
				11100 W
				11101 X
				11110 Y
				11111 Z
		00000	0	NO STATEMENT.
		00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU). ILLEGAL.
		00077	63	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU). RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		00100-00175	64 THROUGH 125	COLLECTIVE ADDRESS.
		00176	126	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		00177	127	ILLEGAL.
		00200-07776	128 THROUGH 4094	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		07777	4095	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		0A000-0Z777	4096 THROUGH 16383	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		10000-17777	16384 THROUGH 20479	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		20000-27777	32768 THROUGH 36863	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G.,

5.3-288

MIL-STD-6016B

FIELD CODING FOR J14.0I

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		2A000-2Z777	36864 THROUGH 49151	TRACKS AND REFERENCE POINTS. ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		70000-77776	114688 THROUGH 118782	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO

5.3-289

MIL-STD-6016B

FIELD CODING FOR J14.0I

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		77777	118783	C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS. ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
768	002	INDEX NUMBER -----		
		NO STATEMENT	0	
		NUMERIC	1 THROUGH 63	A VALUE ASSIGNED BY THE ORIGINATOR TO DIFFERENTIATE AMONG SENSOR TARGET REPORTS.
1811	001	BEARING ORIGIN -----		SPECIFIES THE ORIGIN OF THE BEARING.
		TRACK NUMBER ORIGIN	0	THE ORIGIN OF THE BEARING IS FROM THE LOCATION OF THE ORIGIN TN.
		LATITUDE/LONGITUDE	1	THE ORIGIN OF THE BEARING IS FROM THE LOCATION SPECIFIED IN THE LATITUDE AND LONGITUDE FIELDS.
351	009	SQUARE/CIRCLE SWITCH -----		USED IN CONJUNCTION WITH THE LATITUDE, LONGITUDE, AREA MAJOR AXIS, AREA MINOR AXIS, AND AXIS ORIENTATION FIELDS TO DESCRIBE AN AREA.
		NO STATEMENT	0	
		SQUARE/RECTANGULAR	1	IF AREA MAJOR AND AREA MINOR AXES ARE EQUAL THE AREA DESCRIBED IS A SQUARE. IF THE AXES ARE NOT EQUAL THE AREA DESCRIBED IS A RECTANGLE.
		CIRCULAR/ELLIPTICAL	2	IF AREA MAJOR AND AREA MINOR AXES ARE EQUAL THE AREA DESCRIBED IS A CIRCLE. IF THE AXES ARE NOT EQUAL THE AREA IS AN ELLIPSE.
		UNDEFINED	3	
382	004	FIX OR BEARING DESCRIPTOR -----		DESCRIBES WHETHER THE MESSAGE REFERS TO A FIX, AREA OF PROBABILITY, OR

FIELD CODING FOR J14.0I

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
382	004	FIX OR BEARING DESCRIPTOR -----	(CONTINUED)	
		EW FIX	0	TYPE OF BEARING.
		AREA OF PROBABILITY	1	
		BEARING, TYPE	2	LINE OF BEARING FOR WHICH THE
		NOT SPECIFIED		REPORTING JU IS UNABLE TO SPECIFY
				THE BEARING AS ES, EA, OR RDF.
		BEARING, ES	3	A LINE OF BEARING DERIVED FROM ES
				SOURCES OTHER THAN RDF.
		BEARING, EA	4	JAM STROBE.
		BEARING, RADIO DIRECTION	5	A LINE OF BEARING DERIVED FROM RADIO
		FINDING		DIRECTION FINDING WITH NO
				ASSOCIATED PARAMETRIC DATA.
		DISUSED	6	
		BEARING, UNKNOWN	7	THE DIRECTION OF THE ARRIVAL OF THE
				SIGNAL IS UNKNOWN.
380	001	SECOND -----		THE SECOND OF THE MINUTE.
		0 THROUGH 59	0 THROUGH 59	
		ILLEGAL	60 THROUGH 62	IN ONE SECOND INCREMENTS.
		NO STATEMENT	63	
797	004	MINUTE -----		THE MINUTE OF THE HOUR.
		0 THROUGH 59	0 THROUGH 59	
		ILLEGAL	60 THROUGH 62	IN ONE MINUTE INCREMENTS.
		NO STATEMENT	63	
792	001	HOUR -----		EXPRESSES TIME OF DAY OR A PERIOD OF
		0 HOUR	0	TIME IN HOURS.
		1 THROUGH 23 HOURS	1 THROUGH 23	
		ILLEGAL	24 THROUGH 30	IN ONE HOUR INCREMENTS.
		NO STATEMENT	31	
1809	001	REQUEST NUMBER -----		PROVIDES AN AUDIT TRAIL FOR
		NO STATEMENT	0	RESPONSES TO REQUESTS.
		NUMERIC	1 THROUGH 7	
275	004	ENVIRONMENT/CATEGORY -----		IDENTIFIES THE ENVIRONMENT/CATEGORY
		NO STATEMENT/UNKNOWN	0	OF A JTIDS/MIDS UNIT OR TRACK.

FIELD CODING FOR J14.0I (SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
275	004	ENVIRONMENT/CATEGORY -----	(CONTINUED)	
		SPACE	1	
		AIR	2	
		SURFACE (MARITIME)	3	
		SUBSURFACE (MARITIME)	4	
		LAND (GROUND)	5	
		UNDEFINED	6 THROUGH 7	
429	001	LOCK-ON -----		INDICATES WHETHER ES CONTACT IS LOCKED ON OR IS IN A SURVEILLANCE MODE.
		NO STATEMENT	0	
		LOCK-ON	1	
		SPY	2	
		UNDEFINED	3	

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD TITLE: PARAMETRIC INFORMATION EXTENSION WORD

:	49	48	47	46:	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26:	25
:	FREQUENCY				:																			:	
:	MULTIPLIER, 2				:	FREQUENCY, 1																		:--->	
:					:																			:	
:	4				:	20																		:	

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50	:
:																					:
:	FREQUENCY, 2																				:
:																					:
:	20																				:

WORD DESCRIPTION

WORD NUMBER: J14.0E0

WORD TITLE: PARAMETRIC INFORMATION EXTENSION WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0 -	1 2	10
769 009	TRACK NUMBER, ORIGIN	2 -	20 19	
1819 001	FREQUENCY/FREQUENCY RANGE	21	1	
	INDICATOR (F/R IND)			
1820 003	FREQUENCY MULTIPLIER, 1	22 -	25 4	
	(FRQ ML1)			
417 006	FREQUENCY, 1 (FRQ1)	26 -	45 20	
1820 004	FREQUENCY MULTIPLIER, 2	46 -	49 4	
	(FRQ ML2)			
417 007	FREQUENCY, 2 (FRQ2)	50 -	69 20	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	009	TRACK NUMBER, ORIGIN -----		THE TN IDENTIFYING THE LOCATION OF THE REPORTED BEARING'S ORIGIN, E.G., A UNIT'S LOCATION, OTHER TRACK, OR A POINT. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE-BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6
00111	7
01000	A
01001	B
01010	C
01011	D
01100	E
01101	F
01110	G

FIELD CODING FOR J14.0E0

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	009	TRACK NUMBER, ORIGIN -----	(CONTINUED)	
				01111 H
				10000 J
				10001 K
				10010 L
				10011 M
				10100 N
				10101 P
				10110 Q
				10111 R
				11000 S
				11001 T
				11010 U
				11011 V
				11100 W
				11101 X
				11110 Y
				11111 Z
		00000	0	NO STATEMENT.
		00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		00077	63	ILLEGAL.
		00100-00175	64 THROUGH 125	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		00176	126	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		00177	127	COLLECTIVE ADDRESS.
		00200-07776	128 THROUGH 4094	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		07777	4095	ILLEGAL.
		0A000-0Z777	4096 THROUGH 16383	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		10000-17777	16384 THROUGH 20479	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	009	TRACK NUMBER, ORIGIN -----	(CONTINUED)	
		20000-27777	32768 THROUGH 36863	REPORTING, E.G., TRACKS AND REFERENCE POINTS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.

FIELD CODING FOR J14.0E0

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	009	TRACK NUMBER, ORIGIN ----- 6A000-6Z777	(CONTINUED) 102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		70000-77776	114688 THROUGH 118782	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
1819	001	FREQUENCY/FREQUENCY RANGE INDICATOR ----- FREQUENCY	0	FREQUENCY/FREQUENCY RANGE INDICATOR FIELD IS USED WITH THE FOLLOWING FIELDS TO INDICATE THAT A FREQUENCY OR A FREQUENCY RANGE IS BEING DESCRIBED: FREQUENCY MULTIPLIER, 1; FREQUENCY, 1; FREQUENCY MULTIPLIER, 2; FREQUENCY, 2. THE FREQUENCY, 1 FIELD AND THE FREQUENCY MULTIPLIER, 1 FIELD SHOULD BE INTERPRETED TO DETERMINE THE SINGLE FREQUENCY BEING TRANSMITTED IN THIS MESSAGE. THE FREQUENCY, 2 FIELD AND THE FREQUENCY MULTIPLIER, 2 FIELD SHOULD BE 0SET TO NO STATEMENT AND NOT BE INTERPRETED.
		FREQUENCY RANGE	1	THE FREQUENCY AND FREQUENCY MULTIPLIER FIELDS SHOULD BE INTERPRETED TO DETERMINE THE UPPER AND LOWER LIMITS OF THE FREQUENCY RANGE BEING TRANSMITTED IN THIS MESSAGE.
1820	003	FREQUENCY MULTIPLIER, 1 ----- NUMERIC	0 THROUGH 14	EXPRESSED AS A POWER OF TEN. THIS FIELD IS USED AS A MULTIPLIER TO DETERMINE THE FREQUENCY, 1.

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1820	003	FREQUENCY MULTIPLIER, 1 ----- NO STATEMENT	(CONTINUED) 15	
417	006	FREQUENCY, 1 ----- NO STATEMENT NUMERIC	0 1 THROUGH 1048575	WHEN THE FREQUENCY/FREQUENCY RANGE FIELD IS SET TO ZERO, THIS FIELD IS USED WITH THE FREQUENCY MULTIPLIER, 1 FIELD TO SPECIFY A SINGLE FREQUENCY BEING DESCRIBED. WHEN THE FREQUENCY/FREQUENCY RANGE FIELD IS SET TO ONE, THIS FIELD IS USED WITH THE FREQUENCY MULTIPLIER, 1 FIELD TO SPECIFY THE LOWER LIMIT OF A FREQUENCY RANGE BEING DESCRIBED. EXPRESSED IN HERTZ. THIS VALUE IS USED WITH THE FREQUENCY MULTIPLIER, 1 FIELD TO SPECIFY MULTIPLES OF THIS FREQUENCY.
1820	004	FREQUENCY MULTIPLIER, 2 ----- NUMERIC NO STATEMENT	0 THROUGH 14 15	EXPRESSED AS A POWER OF TEN. THIS FIELD IS USED AS A MULTIPLIER TO DETERMINE THE FREQUENCY, 2.
417	007	FREQUENCY, 2 ----- NO STATEMENT NUMERIC	0 1 THROUGH 1048575	WHEN THE FREQUENCY/FREQUENCY RANGE FIELD IS SET TO ZERO, THIS FIELD SHOULD BE SET TO NO STATEMENT. WHEN THE FREQUENCY/FREQUENCY RANGE FIELD IS SET TO ONE, THIS FIELD IS USED WITH THE FREQUENCY MULTIPLIER, 2 FIELD TO SPECIFY THE UPPER LIMIT OF A FREQUENCY RANGE BEING DESCRIBED. EXPRESSED IN HERTZ. THIS VALUE IS USED WITH THE FREQUENCY MULTIPLIER, 2 FIELD TO SPECIFY MULTIPLES OF THIS FREQUENCY.

5.3-300

MIL-STD-6016B

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: PARAMETRIC INFORMATION CONTINUATION WORD 1

49:	48	47	46	45	44	43	42	41	40	39	38	37	36:	35	34:	33	32	31	30	29	28	27	26:	25			
:	ELEVATION ANGLE										:	SPARE		:	:	:											
<---	:													---	ELV ALT:	SECTOR WIDTH										---	>
:	ALTITUDE, 25 FT												:	:	:												
:	13												:	2	:	8										:	

: 69:	68	67	66	65	64	63	62	61	60	59	58:	57	56	55	54	53	52	51	50	
: :											:									
: SP :	SPEED										:	COURSE								
: :											:									
: 1 :	11										:	9								

WORD DESCRIPTION

WORD NUMBER: J14.0C1
WORD TITLE: PARAMETRIC INFORMATION CONTINUATION WORD 1

REFERENCE		BIT #	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0- 1 2	01
1551 001	CONTINUATION WORD LABEL	2- 6 5	00001
1812 001	PARAMETER SOURCE (SRC)	7- 9 3	
383 006	BEARING ACCURACY (BA)	10- 13 4	
372 007	BEARING	14- 25 12	
1804 001	SECTOR WIDTH	26- 33 8	
1852 001	ELEVATION ANGLE/ALTITUDE INDICATOR (ELV ALT)	34- 35 2	
756 003	SPARE	36- 38 3	
428 002	ELEVATION ANGLE	39- 48 10	
365 033	ALTITUDE, 25 FT	36- 48 13	
371 015	COURSE	49- 57 9	
367 018	SPEED	58- 68 11	
756 001	SPARE (SP)	69 1	

FIELD CODING FOR J14.0C1

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1812	001	PARAMETER SOURCE -----		SPECIFIES THE SOURCE OF THE DATA BEING REPORTED.
		NO STATEMENT	0	
		PARAMETRIC DATA SOURCE, MEASURED	1	
		PARAMETRIC DATA SOURCE, LIBRARY	2	
		STROBE SOURCE, ACTIVE RADAR	3	
		STROBE SOURCE, OTHER	4	
		REPORT SOURCE, RADIO DIRECTION FINDING	5	
		REPORT SOURCE, OTHER	6	
		UNDEFINED	7	
383	006	BEARING ACCURACY -----		THE BEARING ACCURACY IS STATED AS A NUMERICAL VALUE FROM 1 TO 15 WITH THE HIGHER VALUES INDICATING THE HIGHER ASSET BEARING ACCURACIES. THE ASSET BEARING ACCURACY IS REPRESENTED IN DEGREES OF ACCURACY AT A RANGE OF 300 DATA MILES BETWEEN THE ES RECEIVER AND THE TARGET EMITTER.
		NO STATEMENT	0	
		> 10.0 DEGREES	1	
		<= 10.0 DEGREES	2	
		<= 5.0 DEGREES	3	
		<= 4.0 DEGREES	4	
		<= 3.0 DEGREES	5	
		<= 2.0 DEGREES	6	
		<= 1.0 DEGREES	7	
		<= 0.4 DEGREES	8	
		<= 0.2 DEGREES	9	
		<= 0.032 DEGREES	10	
		<= 0.016 DEGREES	11	
		<= 0.008 DEGREES	12	
		<= 0.004 DEGREES	13	
		<= 0.002 DEGREES	14	
		<= 0.001 DEGREES	15	
372	007	BEARING -----		BEARING IS REFERENCED TO TRUE NORTH. IN 360/4096 DEGREE INCREMENTS.
		0 THROUGH 359 3736/4096 DEGREES	0 THROUGH 4095	

FIELD CODING FOR J14.0C1

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1804	001	SECTOR WIDTH -----		THE NUMBER OF DEGREES ON EACH SIDE OF THE SPECIFIED BEARING, TO THE NEAREST WHOLE DEGREE. IN ONE DEGREE INCREMENTS.
		0 THROUGH 180 DEGREES ILLEGAL NO STATEMENT	0 THROUGH 180 181 THROUGH 254 255	
1852	001	ELEVATION ANGLE/ALTITUDE INDICATOR -----		INDICATES WHETHER ELEVATION ANGLE OR ALTITUDE IS BEING REPORTED.
		NO STATEMENT	0	
		ELEVATION ANGLE IS BEING REPORTED	1	
		ALTITUDE IS BEING REPORTED	2	
		UNDEFINED	3	
428	002	ELEVATION ANGLE -----		EXPRESSES ANGULAR ELEVATION MEASURED FROM THE HORIZONTAL. ABOVE HORI- ZONTAL ANGLES ARE POSITIVE. BELOW HORIZONTAL ANGLES ARE NEGATIVE. EXPRESSES ANGULAR ELEVATION IN UNITS OF 1/2048 OF A CIRCLE MEASURED FROM THE HORIZONTAL. ANGULAR ELEVATIONS ABOVE THE HORIZONTAL ARE POSITIVE. ANGULAR ELEVATIONS BELOW THE HORIZONTAL ARE NEGATIVE. BIT CODES ARE IN TWOS COMPLEMENT CODING.
		0 THROUGH 511 PI/1024 RADIANS	0 THROUGH 511	IN PI/1024 RADIAN INCREMENTS.
		NO STATEMENT	512	
		-511 PI/1024 THROUGH -PI/1024 RADIANS	513 THROUGH 1023	IN PI/1024 RADIAN INCREMENTS.
365	033	ALTITUDE, 25 FT -----		EXPRESSES ALTITUDE AS MEASURED OUT- WARD FROM THE EARTH AS A POSITIVE QUANTITY ABOVE MEAN SEA LEVEL (MSL) IN FEET. IN 25 FEET INCREMENTS.
		0 THROUGH 204,750 FEET ALTITUDE UNKNOWN	0 THROUGH 8190 8191	
371	015	COURSE -----		INDICATES THE DIRECTION OF TRAVEL OF AN OBJECT IN DEGREES WITH RESPECT TO TRUE NORTH.

FIELD CODING FOR J14.0C1 (SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
371	015	COURSE ----- 0 THROUGH 359 DEGREES ILLEGAL NO STATEMENT	(CONTINUED) 0 THROUGH 359 360 THROUGH 510 511	IN 1 DEGREE INCREMENTS.
367	018	SPEED ----- 0 THROUGH 4092 DATA MILES PER HOUR NO STATEMENT	0 THROUGH 2046 2047	THE RATE OF CHANGE OF POSITION. EXPRESSES GROUND SPEED IN 2 DATA MILES PER HOUR INCREMENTS.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: PARAMETRIC INFORMATION CONTINUATION WORD 2

:	49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	:	27	26	25
:																							:			
:	LONGITUDE, 0.0051 MINUTE																						:	---		
:																							:			
:																							:			
:	22																						:			

:	69	68	67	66	65	64	63	62:	61	60	59	58	57	56:	55	54	53	52	51	50:			
:									:							:							:
:	AXIS ORIENTATION								:	AREA MINOR AXIS						:	AREA MAJOR AXIS						:
:									:							:							:
:	8								:	6						:	6						:

WORD DESCRIPTION

WORD NUMBER: J14.0C2

WORD TITLE: PARAMETRIC INFORMATION CONTINUATION WORD 2

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	00010
281 014	LATITUDE, 0.0051 MINUTE	7-	27 21	
282 014	LONGITUDE, 0.0051 MINUTE	28-	49 22	
419 003	AREA MAJOR AXIS	50-	55 6	
419 004	AREA MINOR AXIS	56-	61 6	
1806 001	AXIS ORIENTATION	62-	69 8	

FIELD CODING FOR J14.0C2

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
281	014	LATITUDE, 0.0051 MINUTE -----		THE PRECISION IS APPROXIMATELY 31 FEET. IN 90/1,048,575 DEGREE INCREMENTS.
		0 DEGREES	0	
		+90/1,048,575 THROUGH +90 DEGREES NORTH	1 THROUGH 1048575	
		NO STATEMENT	1048576	
		-90 THROUGH -90/1,048,575 DEGREES SOUTH	1048577 THROUGH 2097151	
282	014	LONGITUDE, 0.0051 MINUTE -----		THE PRECISION IS APPROXIMATELY 31 FEET. IN 180/2,097,151 DEGREE INCREMENTS.
		0 DEGREES	0	
		+180/2,097,151 THROUGH +180 DEGREES EAST	1 THROUGH 2097151	
		NO STATEMENT	2097152	
		-180 THROUGH -180/2,097,151 DEGREES WEST	2097153 THROUGH 4194303	
419	003	AREA MAJOR AXIS -----		THIS FIELD IS USED IN CONJUNCTION WITH THE SQUARE/CIRCLE SWITCH, AREA MINOR AXIS, AXIS ORIENTATION, LATITUDE AND LONGITUDE TO DESCRIBE THE AREA OF A CIRCLE, ELLIPSE, SQUARE OR RECTANGLE. THE LENGTH EXPRESSED IN THIS FIELD IS DOUBLED AND CENTERED ON THE POSITION DE- SCRIBED BY THE LATITUDE AND LONGITUDE. IN FOUR DATA MILE INCREMENTS.
		0 THROUGH 244 DATA MILES	0 THROUGH 61	
		248 DATA MILES OR MORE	62	
		NO STATEMENT	63	
419	004	AREA MINOR AXIS -----		THIS FIELD IS USED IN CONJUNCTION WITH THE SQUARE/CIRCLE SWITCH, AREA MAJOR AXIS, AXIS ORIENTATION, LATITUDE AND LONGITUDE TO DESCRIBE THE AREA OF A CIRCLE, ELLIPSE, SQUARE OR RECTANGLE. THE AREA MINOR AXIS IS ALWAYS ORIENTED AT 90 DEGREES TO THE AREA MAJOR AXIS. THE LENGTH EXPRESSED IN THIS FIELD

FIELD CODING FOR J14.0C2

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
419	004	AREA MINOR AXIS -----	(CONTINUED)	
		0 THROUGH 244 DATA MILES 248 DATA MILES OR MORE NO STATEMENT	0 THROUGH 61 62 63	IS DOUBLED AND CENTERED ON THE POSITION DESCRIBED BY THE LATITUDE AND LONGITUDE. IN FOUR DATA MILE INCREMENTS.
1806	001	AXIS ORIENTATION -----		
		0 THROUGH 179 DEGREES ILLEGAL NO STATEMENT	0 THROUGH 179 180 THROUGH 254 255	THE AXIS ORIENTATION IS THE OFFSET FROM TRUE NORTH EXPRESSED IN ONE DEGREE INCREMENTS FROM ZERO TO 179 AND IS USED TO ORIENT THE AREA MA- JOR AXIS OF A CIRCLE, ELLIPSE, SQUARE, OR RECTANGLE. IN ONE DEGREE INCREMENTS.

WORD MAP

WORD NUMBER: J14.0C3

WORD TITLE: PARAMETRIC INFORMATION CONTINUATION WORD 3

: 24: 23 22 21 20: 19 18 17 16 15 14: 13 12 11 10 09 08 07: 06 05 04 03 02: 01 00:																																			
: MUL:								:								: CONTINUATION WORD :								: WORD :											
: EVL: MODULATION CODE:								: MODE NUMBER :								: Emitter FUNCTION :								: LABEL :								: FORMAT :			
: :								:								:								:								:			
: 1 : 4 : 6 : 7 : 5 : 2 :																																			
: 49 48 47: 46 45 44 43 42 41 40 39 38 37 36 35 34 33: 32 31 30: 29 28 27: 26 25:																																			
: Emitter :								:								: AC :								: BC :								: SP :			
: CONFIDENCE :								: SPARE :								:								:								:			
: :								:								:								:								:			
: 3 : 14 : 3 : 3 : 2 :																																			
: 69: 68 67 66: 65 64 63 62 61 60 59 58 57 56 55 54 53 52 51 50:																																			
: WTR: Emitter :								:								:								:								:			
: MDE: NUMBER :								:								: Emitter NUMBER :								:								:			
: : INDICATOR :								:								:								:								:			
: 1 : 3 : 16 :																																			

WORD DESCRIPTION

WORD NUMBER: J14.0C3

WORD TITLE: PARAMETRIC INFORMATION CONTINUATION WORD 3

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550 001		WORD FORMAT	0-	1 2	01
1551 001		CONTINUATION WORD LABEL	2-	6 5	00011
1843 001		EMITTER FUNCTION	7-	13 7	
430 001		MODE NUMBER	14-	19 6	
1849 001		MODULATION CODE (MOD COD)	20-	23 4	
423 001		MULTIPLE EVALUATION (MUL EVL)	24	1	
756 002		SPARE (SP)	25-	26 2	
425 003		BROAD CLASSIFICATION (BC)	27-	29 3	SEE NOTES 1 AND 2.
426 003		AMPLIFYING CHARACTERISTICS (AC)	30-	32 3	SEE NOTES 1 AND 2.
756 014		SPARE	33-	46 14	
431 003		EMITTER CONFIDENCE	47-	49 3	
422 001		EMITTER NUMBER	50-	65 16	
266 001		EMITTER NUMBER INDICATOR	66-	68 3	
1821 001		WARTIME RESERVE MODE INDICATOR	69	1	
		(WTR MDE)			

J14.0C3 WORD NOTES
NOTE 1 Broad Classification/Amplifying Characteristics When Fix
or Bearing Descriptor = 4 (Bearing, ECM)

AMPLIFYING CHARACTERISTICS	BROAD CLASSIFICATION				
	0	1	2	3	4-7
	NO STATEMENT	RADAR	IFF	COMMUNICATION	UNDEFINED
0	NO STATEMENT	UNKNOWN	UNKNOWN	NO STATEMENT	UNDEFINED
1	ILLEGAL	DISRUPTIVE	DISRUPTIVE TRANSPONDER	UNDEFINED	UNDEFINED
2	ILLEGAL	DECEPTIVE	DECEPTIVE TRANSPONDER	UNDEFINED	UNDEFINED
3	ILLEGAL	IRCM	DECEPTIVE INTERROGATOR	UNDEFINED	UNDEFINED
4	ILLEGAL	LASER-CM	DISRUPTIVE INTERROGATOR	UNDEFINED	UNDEFINED
5	ILLEGAL	SIDELOBE	UNDEFINED	UNDEFINED	UNDEFINED
6	ILLEGAL	CHAFF	UNDEFINED	UNDEFINED	UNDEFINED
7	ILLEGAL	MULTIPLE JAMMER	MULTIPLE JAMMER	UNDEFINED	UNDEFINED

J14.0C3 WORD NOTES

NOTE 2 Broad Classification/Amplifying Characteristics When Fix or Bearing Descriptor ≠ 4

AMPLIFYING CHARACTERISTICS	BROAD CLASSIFICATION					
	0	1	2	3	4	5-7
	NO STATEMENT	RADAR TYPE	COMMUNICATION	ANTI-SHIP CAPABLE MISSILE	COUNTERMEASURES	UNDEFINED
0	NO STATEMENT	NO STATEMENT	NO STATEMENT	NO STATEMENT	NO STATEMENT	UNDEFINED
1	ILLEGAL	2D SEARCH	VOICE	TARGETING RADAR	DISRUPTIVE	UNDEFINED
2	ILLEGAL	3D SEARCH	KEYED TELEGRAPH	TARGETING LINK	DECEPTIVE	UNDEFINED
3	ILLEGAL	FIRE CONTROL (CONVENTIONAL)	TELETYPE	BEACON	IRCM	UNDEFINED
4	ILLEGAL	FIRE CONTROL (LASER)	DATA LINK	COMMAND GUIDANCE	LASER-CM	UNDEFINED
5	ILLEGAL	DOPPLER	TV/IMAGERY	TERMINAL GUIDANCE	UNDEFINED	UNDEFINED
6	ILLEGAL	CW	MULTIPLEX	UNDEFINED	UNDEFINED	UNDEFINED
7	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED

5.3-315

MIL-STD-6016B

FIELD CODING FOR J14.0C3

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1843	001	EMITTER FUNCTION -----		THE REPRESENTATION OF THE FUNCTION OR ONE OF THE FUNCTIONS OF AN EMITTER.
		NO STATEMENT	0	
		AA, ANTI AIRCRAFT FIRE CONTROL	1	
		AB, AIRBORNE SEARCH AND BOMBING	2	
		AC, AIR SEARCH	3	
		AE, AIRBORNE EARLY WARNING	4	
		AF, AIRBORNE FIRE CONTROL	5	
		AG, AIRBORNE GUN LAYING (PLANE TO PLANE)	6	
		AI, AIRBORNE INTERCEPT	7	
		AL, ALTIMETER	8	
		AM, AIRBORNE RECON/ MAPPING	9	
		AQ, ACQUISITION	10	
		AR, AIRBORNE RANGE ONLY	11	
		AS, ATMOSPHERIC SOUNDING	12	
		AT, AIR TRAFFIC CONTROL	13	
		BC, BROADCAST	14	
		BM, BOMBING	15	
		BN, BEACON/TRANSPONDER	16	
		BO, BOMBING THROUGH OVERCAST	17	
		BS, BATTLEFIELD SURVEILLANCE	18	
		BT, BALLOON TRACKER	19	
		CA, CARRIER CONTROLLED APPROACH	20	
		CI, CARRIER CONTROL INTERCEPT	21	
		CM, COMMUNICATION	22	
		CR, COMMUNICATIONS RECEIVER	23	
		CS, COASTAL SURVEILLANCE	24	
		CT, COMMUNICATIONS TRANSMITTER	25	
		DC, DRONE CONTROL	26	
		DF, DIRECTION FINDING	27	
		DM, DISTANCE MEASURE	28	
		DT, DATA TRANSMISSION	29	

FIELD CODING FOR J14.0C3

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1843	001	EMITTER FUNCTION	(CONTINUED)	

		DU, DUMMY SITE	30	
		EA, ELECTRONIC ATTACK	31	
		ES, ELECTROMAGNETIC	32	
		SENSOR		
		ET, EARLY WARNING/	33	
		TARGET ACQUISITION		
		EW, EARLY WARNING	34	
		FC, FIRE CONTROL	35	
		FS, FREQUENCY STANDARD	36	
		GA, GROUND CONTROLLING	37	
		APPROACH		
		GB, GUN LAYING BEACON	38	
		GI, GROUND CONTROL	39	
		INTERCEPT		
		GL, GUN LAYING	40	
		GM, GUIDED MISSILE	41	
		GP, GLIDE PATH	42	
		GS, GROUND SPEED	43	
		INDICATOR		
		GU, GUIDANCE	44	
		GX, GROUND CONTROLLED	45	
		APPROACH SURVEILLANCE		
		HF, HEIGHT FINDING	46	
		HS, HARBOR SURVEILLANCE	47	
		ID, INTRUSION DETECTOR	48	
		SYSTEM		
		IF, IFF	49	
		IL, INSTRUMENT LANDING	50	
		SYSTEM		
		IM, ILLUMINATOR	51	
		IS, IONOSPHERIC SOUNDING	52	
		JM, JAMMER	53	
		LA, LOW ANGLE FIRE	54	
		CONTROL GUN LAYING		
		LN, LORAN	55	
		LO, LOCALIZER	56	
		MA, MISSILE ACQUISITION	57	
		MB, MARKER BEACON	58	
		MC, MISSILE CONTROL	59	
		ME, METEOROLOGICAL	60	
		MG, MISSILE GUIDANCE	61	
		MH, MISSILE HOMER	62	

FIELD CODING FOR J14.0C3

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1843	001	EMITTER FUNCTION	(CONTINUED)	

		MP, MARSHALLING POINT	63	
		FOR NONCOMMUNICATIONS		
		EQUIPMENT		
		MR, MICROWAVE RELAY	64	
		MT, MISSILE TRACKING	65	
		NA, NAVIGATIONAL	66	
		NW, NAVIGATION/WEATHER	67	
		AVOIDANCE		
		PA, PRECISION APPROACH	68	
		PD, PASSIVE DETECTION	69	
		PE, PRECISION ELEVATION	70	
		RADAR		
		PI, PROJECTILE INTERCEPT	71	
		PL, PERSONNEL DETECTOR	72	
		PR, PASSIVE RANGING	73	
		PW, PROXIMITY WARNING	74	
		RADAR		
		RA, RADAR DATA	75	
		RD, RADAR DECOY	76	
		RI, RANGE INSTRUMENTA-	77	
		TION		
		RO, RANGE ONLY	78	
		RR, RADIO RELAY	79	
		RS, RADIO/RADARSONDE	80	
		SA, SATELLITE TRACKER	81	
		SB, SONOBUOY	82	
		SC, SATELLITE	83	
		COMMUNICATIONS		
		SE, SURFACE SEARCH/EARLY	84	
		WARNING		
		SF, SURFACE FIRE CONTROL	85	
		SH, SEARCH/HEIGHT FINDER	86	
		SL, SEARCHLIGHT CONTROL	87	
		SP, SPACE SURVEILLANCE	88	
		SR, SEARCH RADAR	89	
		SS, SURFACE SEARCH	90	
		ST, SHELL TRACKING	91	
		SV, SENSOR RELAY	92	
		SX, SIF TRANSPONDER	93	
		TA, TARGET ACQUISITION	94	
		TD, 3-D RADAR	95	
		TF, TAIL FIRE CONTROL	96	
		TM, TELEMETERING	97	

FIELD CODING FOR J14.0C3 (SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1843	001	EMITTER FUNCTION -----	(CONTINUED)	
		TR, TRANSMITTER/ RECEIVER COMMUNICATION	98	
		TS, TROPO-SCATTER	99	
		TT, TARGET TRACKING	100	
		TV, TELEVISION	101	
		TW, TAIL WARNING	102	
		TY, TELETYPE	103	
		UN, UNKNOWN	104	
		VA, VIDEO DATA	105	
		VD, VEHICLE DETECTOR	106	
		VR, VIDEO REMOTING	107	
		VT, PROXIMITY FUSE	108	
		XP, EXPERIMENTAL/TRAINER	109	
		LS-LASER	110	
		UNDEFINED	111 THROUGH 127	
430	001	MODE NUMBER -----		A TWO DIGIT NUMERIC INDEX SEQUEN- Tially assigned to each mode of a given emitter. A mode is a group of RF parameters which character- ize several possible operating conditions of a given emitter. Mode numbers amplify the emitter number field. Not all emitters have mode numbers.
		NO STATEMENT NUMERIC	0 1 THROUGH 63	
1849	001	MODULATION CODE -----		INDICATES THE TYPE OF SIGNAL MODULATION.
		NO STATEMENT	0	
		AMPLITUDE MODULATED	1	INFORMATION IS ADDED TO A CARRIER FREQUENCY BY VARYING THE AMPLITUDE OF THE RF ENERGY.
		PULSED	2	RF ENERGY IS TURNED ON AND OFF TO PRODUCE A SERIES OF RF ENERGY PULSES.
		CONTINUOUS WAVE	3	SINE WAVE RF ENERGY THAT VARIES OVER A NARROW RANGE OF AMPLITUDE OR FREQUENCIES.
		PULSE MODULATED	4	RF ENERGY IS TURNED ON AND OFF AT DISCRETE INTERVALS TO PRODUCE A SERIES OF PULSES WITH DETERMINABLE

FIELD CODING FOR J14.0C3 (SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1849	001	MODULATION CODE -----	(CONTINUED)	
		FREQUENCY MODULATED	5	PULSE AMPLITUDE, PULSE REPETITION INTERVAL, AND PULSE WIDTH. INFORMATION IS ADDED TO A CARRIER WAVE BY VARYING THE CARRIER'S CENTER FREQUENCY.
		PHASE MODULATED	6	THE INFORMATION WAVE IS ADDED TO THE CARRIER FREQUENCY BY CHANGING THE PHASE RELATIONSHIP WITHIN THE CARRIER SINE WAVE.
		PULSE STAGGER	7	THE PULSE REPETITION INTERVAL OF A PULSE MODULATED SIGNAL CHANGES AT EACH OCCURRENCE OF THE MAIN-BANG OR SYNC PULSE IN DISCRETE STEPS.
		PULSE DOPPLER	8	PULSE MODULATED SIGNALS WITH A HIGH PRF ARE USED IN PRECISION RADAR APPLICATIONS. THE RADAR TARGET'S VELOCITY IS DETERMINED BY MEASURING CHANGES IN THE CENTER FREQUENCY OF THE ECHO PULSE WITH RELATION TO THE TRANSMITTED PULSE CENTER FREQUENCY. THE PULSES ARE USED TO DETERMINE TARGET RANGE.
		NOISE JAMMING	9	AN AM OR FM SIGNAL MODULATED WITH NOISE THAT IS USED TO REDUCE THE EFFECTIVENESS OF SIGNALS OPERATING IN THE SAME FREQUENCY RANGE AS THE NOISE SIGNAL.
		CODE MODULATION PULSE	10	SEQUENCES OF PULSES USED TO CONVEY INFORMATION EITHER IN THE FORM OF PULSE AMPLITUDE, PULSE WIDTH, PULSE GROUP, OR PULSE POSITION RELATIONSHIPS. MODULATION ON TOP OF THE PULSES USING FM, AM, OR PHASE MODULATION TECHNIQUES MAY ADD TO THE INFORMATION CONTENT OF PULSE MODULATION SIGNALS.
		TIME DIVISION	11	ALLOCATION OF SIGNAL FUNCTION IN RELATIONSHIP TO THE START TIME OF THE SIGNAL INFORMATION CYCLE PROVIDES A DIVISION OF INFORMATION TRANSMISSION TIME THAT ALLOWS DIFFERENT INFORMATION SOURCES TO SHARE A SINGLE RF CARRIER.

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1849	001	MODULATION CODE ----- UNDETERMINED UNDEFINED	(CONTINUED) 12 13 THROUGH 15	
423	001	MULTIPLE EVALUATION ----- UNIQUE EMITTER NOT UNIQUE	 0 1	EVALUATION REPORTED IS MOST SIGNIFI- CANT OF SEVERAL POSSIBLE EMITTERS.
431	003	EMITTER CONFIDENCE ----- NO STATEMENT VALUE 1 VALUE 2 THROUGH 5	 0 1 2 THROUGH 5	THE CONFIDENCE IS COMPUTED ON THE BASIS OF THE NUMBER OF PARAMETER MATCHES FOR THE FOLLOWING EMITTER PARAMETERS: FREQUENCY, PULSE REPETITION FREQUENCY, PULSE WIDTH, JITTER, SCAN CYCLE/ANTENNA ROTATION PERIOD/SCAN RATE, SCAN TYPE AND POLARIZATION. A PARAMETER MATCH MEANS THAT AN EMITTER PARAMETER HAS BEEN DETECTED, MEASURED, AND COMPARED WITH DATA STORED IN INTELLIGENCE FILES. IT FURTHER IMPLIES THAT NO PARAMETER FOUND IS OUTSIDE THE RANGE SPECIFIED IN THE INTELLIGENCE FILE. LOW CONFIDENCE - LESS THAN 4 PARAMETER MATCHES. THE VALUE IS DETERMINED BY THE FOLLOWING RULES: A. INCREASE ONE VALUE FOR EACH ADDITIONAL PARAMETER MATCH ABOVE 3. B. INCREASE ONE VALUE FOR AN ES/ NON-ES 'OPERATOR KNOWN' ASSOCIATION (THE OPERATOR RECOGNIZES AN ASSOCIATION THAT MAY OR MAY NOT HAVE BEEN TRANSMITTED ON THE LINK). C. INCREASE TWO VALUES FOR EVERY 'OPERATOR KNOWN' EMITTER ASSOCIATION. D. THE TOTAL SHALL NOT EXCEED 5.

FIELD CODING FOR J14.0C3 (SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
431	003	EMITTER CONFIDENCE ----- VALUE 6 VALUE 7	(CONTINUED) 6 7	HIGH CONFIDENCE (OPERATOR EVALUATION). POSITIVE CONFIDENCE.
422	001	EMITTER NUMBER ----- ----- FOR EMITTER NUMBER INDICATOR (EN=1) ----- NATO SPOT NUMBER ILLEGAL	 000000 THROUGH 037777 (OCTAL) 040000 THROUGH 177777 (OCTAL)	IDENTIFIES A SPECIFIC EMITTER. THE NATO SPOT NUMBER USES 5 OCTAL DIGITS WITH A RANGE OF 0-37777.
266	001	EMITTER NUMBER INDICATOR ----- DO NOT INTERPRET EMITTER NUMBER FIELD INTERPRET EMITTER NUMBER FIELD AS NATO SPOT NUMBER UNDEFINED	 0 1 2 THROUGH 7	EMITTER NUMBER INDICATOR IS USED WITH THE EMITTER NUMBER FIELD TO INDICATE WHICH DATABASE THE EMITTER NUMBER IS ASSOCIATED WITH.
1821	001	WARTIME RESERVE MODE INDICATOR ----- NORMAL OPERATIONS WARTIME RESERVE MODE	 0 1	WARTIME RESERVE MODE INDICATOR IS TO BE USED WITH THE EMITTER NUMBER FIELD TO INDICATE WHICH MODE THE EMITTER IS OPERATING IN. INDICATES THE EMITTER IS FUNCTIONING IN ITS NORMAL OPERATING MODE. INDICATES THE EMITTER IS FUNCTIONING IN ITS WARTIME RESERVE MODE. WARTIME RESERVE MODE IS: AN INTENTIONAL CHANGE IN OBSERVABLE ELECTRO-MAGNETIC EMITTER PARAMETER OR OPERATIONAL PROCEDURE INTENDED TO REDUCE THE EFFECTIVENESS OF EW EQUIPMENT OR OTHER DETECTION, CLASSIFICATION, AND SUPPORT

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1821	001	WARTIME RESERVE MODE INDICATOR (CONTINUED) -----		ACTIVITIES OF OPPOSING FORCES. THESE MODES ARE DELIBERATELY HELD IN RESERVE FOR WARTIME EMERGENCY USE AND ARE SELDOM, IF EVER, INTERCEPTED OR OBSERVED PRIOR TO THE EMERGENCY. ALSO CALLED WARM.

WORD MAP

WORD NUMBER: J14.0C4

WORD TITLE: PARAMETRIC INFORMATION CONTINUATION WORD 4

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00			
PULSE REPETITION FREQUENCY																	:	PRI	:	CONTINUATION WORD					:	WORD	:
PULSE REPETITION INTERVAL																	:	IND	:	LABEL					:	FORMAT	:
																	:		:						:		:
23																	:	1	:	5					:	2	:
49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25			
SCAN TYPE		:	JITTER		:	PULSE WIDTH														:					---	>	
		:			:															:					---	>	
5		:	2		:	14														:							
					:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50		
					:	JRS LVL		:	PLR		:	ANTENNA SCAN RATE										:			:		
					:			:			:	ANTENNA SCAN PERIOD										:	ASP IND		:	---	>
					:			:			:											:			:		
					:	3		:	3		:	10										:	2		:		

WORD DESCRIPTION

WORD NUMBER: J14.0C4

WORD TITLE: PARAMETRIC INFORMATION CONTINUATION WORD 4

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	01
1551	001	CONTINUATION WORD LABEL	2-	6 5	00100
362	015	PRF/PRI INDICATOR (PRI IND)	7	1	
440	006	PULSE REPETITION FREQUENCY	8-	30 23	
1903	001	PULSE REPETITION INTERVAL	8-	30 23	
435	006	PULSE WIDTH	31-	44 14	
432	001	JITTER	45-	46 2	
433	001	SCAN TYPE	47-	51 5	
362	016	ANTENNA SCAN RATE/PERIOD INDICATOR (ASP IND)	52-	53 2	
1580	004	ANTENNA SCAN RATE	54-	63 10	
1580	005	ANTENNA SCAN PERIOD	54-	63 10	
434	001	POLARIZATION (PLR)	64-	66 3	
427	001	JAMMER RECEIVED SIGNAL LEVEL (JRS LVL)	67-	69 3	

FIELD CODING FOR J14.0C4

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
362	015	PRF/PRI INDICATOR ----- PRF BEING REPORTED PRI BEING REPORTED	0 1	INDICATES WHETHER PRF OR PRI IS BEING REPORTED.
440	006	PULSE REPETITION FREQUENCY ----- UNKNOWN/NO STATEMENT 0.1 THROUGH 838,860.6 PULSES PER SECOND 131,071 PULSES PER SECOND OR GREATER	0 1 THROUGH 8388606 8388607	THE RATE AT WHICH PULSES OR PULSE GROUPS ARE TRANSMITTED. PULSES PER SECOND IN ONE TENTH OF A PULSE PER SECOND INCREMENTS. TRANSMITTED ONLY BY A DATA FORWARDER.
1903	001	PULSE REPETITION INTERVAL ----- UNKNOWN/NO STATEMENT 4 THROUGH 33,554,428 NANOSECONDS	0 1 THROUGH 8388607	THE INTERVAL OF TIME BETWEEN TWO TRANSMITTED PULSES OR PULSE GROUPS. PULSE REPETITION INTERVAL IN FOUR NANOSECOND INCREMENTS.
435	006	PULSE WIDTH ----- NO STATEMENT 0.05 THROUGH 819.15 MICROSECONDS	0 1 THROUGH 16383	IDENTIFIES THE PULSE WIDTH OF ES EMISSIONS. IN 0.05 MICROSECOND INCREMENTS.
432	001	JITTER ----- NO STATEMENT NO JITTER JITTER PRESENT UNDEFINED	0 1 2 3	SPECIFIES IF JITTER IS PRESENT ON THE INTERCEPTED EMISSION.
433	001	SCAN TYPE ----- NO STATEMENT FIXED SCAN (D) CIRCULAR SCAN (A) LOBE SWITCHING (G) DISUSED SECTOR SCAN CONICAL SCAN (F) COMPLEX SCAN	0 1 2 3 4 5 6 7	THE TYPE OF PATTERN OR SCAN THAT THE EMITTED ELECTROMAGNETIC ENERGY FOLLOWS AS A VOLUME IN SPACE IS SEARCHED.

FIELD CODING FOR J14.0C4

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
433	001	SCAN TYPE -----	(CONTINUED)	
		SPIRAL (K)	8	
		RASTER (J)	9	
		VARIABLE/RANDOM	10	
		STEADY	11	
		MANUAL (E)	12	
		UNI-DIRECTIONAL	13	
		UNDETERMINED (Z)	14	
		HORIZONTAL SECTOR (BIDI)	15	
		(B)		
		HORIZONTAL SECTOR (UNI)	16	
		(T)		
		VERTICAL SECTOR (BIDI)	17	
		(C)		
		VERTICAL SECTOR (UNI)	18	
		(S)		
		SECTOR AND CONICAL (O)	19	
		BI-DIRECTIONAL (BIDI)	20	
		CIRCULAR AND CONICAL (N)	21	
		HELICAL (L)	22	
		CIRCULAR AND VERTICAL	23	
		SECTOR (M)		
		AGILE BEAM (P)	24	
		UNI-DIRECTIONAL SECTOR	25	
		(U)		
		BI-DIRECTIONAL SECTOR	26	
		(V)		
		OTHER COMBINATIONS AND	27	
		PATTERNS (R)		
		MONOPULSE (H)	28	
		PASSIVE SCAN (Q)	29	
		UNDEFINED	30 THROUGH 31	
362	016	ANTENNA SCAN RATE/PERIOD INDICATOR -----		INDICATES WHETHER ANTENNA SCAN RATE (PRIMARY OR SECONDARY) OR ANTENNA SCAN PERIOD IS BEING REPORTED.
		NO STATEMENT	0	
		PRIMARY ANTENNA SCAN	1	
		RATE BEING REPORTED		
		ANTENNA SCAN PERIOD	2	
		BEING REPORTED		
		SECONDARY ANTENNA SCAN	3	
		RATE BEING REPORTED		

FIELD CODING FOR J14.0C4

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1580	004	ANTENNA SCAN RATE -----		THE RATE REQUIRED FOR A BEAM OF RADIO FREQUENCY ENERGY TO COMPLETE A GIVEN SCAN PATTERN.
		NO ROTATION/NO SCAN	0	
		1 THROUGH 1022 HZ	1 THROUGH 1022	IN 1 HZ INCREMENTS.
		EQUAL TO OR GREATER THAN 1023 HZ	1023	
1580	005	ANTENNA SCAN PERIOD -----		THE TIME REQUIRED FOR ONE COMPLETE SCAN.
		NO STATEMENT	0	
		1/8 THROUGH 127 3/4 SECONDS PER SCAN	1 THROUGH 1022	IN 1/8 SECONDS PER SCAN INCREMENTS.
		GREATER THAN 127 3/4 SECONDS PER SCAN	1023	
434	001	POLARIZATION -----		DESCRIBES THE POLARIZATION OF ES EMISSIONS.
		NO STATEMENT	0	
		CIRCULAR	1	
		HORIZONTAL	2	
		ROTATING	3	
		VERTICAL	4	
		SLANT	5	
		UNDEFINED	6 THROUGH 7	
427	001	JAMMER RECEIVED SIGNAL LEVEL -----		A MEASURE OF THE POWER OF AN EA JAMMER.
		NO STATEMENT	0	
		21 THROUGH 24 DBM	1	
		25 THROUGH 28 DBM	2	
		29 THROUGH 32 DBM	3	
		33 THROUGH 36 DBM	4	
		37 THROUGH 40 DBM	5	
		41 THROUGH 44 DBM	6	
		45 OR MORE DBM	7	

5.3-328

MIL-STD-6016B

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J14.0C5

WORD TITLE: PARAMETRIC INFORMATION CONTINUATION WORD 5

24	23:	22	21	20	19	18	17:	16	15	14:	13	12	11	10	09	08	07:	06	05	04	03	02:	01	00:
<---	:	SPACE PLATFORM						:							:							:		
-----	:	AIR PLATFORM						:							:							:		
<---	:	SURFACE (MARITIME) PLATFORM						:							:							:		
<---	:	SUBSURFACE (MARITIME) PLATFORM						:	PLATFORM	NATIONALITY/ALLIANCE OF TRACK						:	CONTINUATION WORD LABEL				:	WORD FORMAT	:	
-----	:							:	EVALUATION							:					:	FORMAT	:	
-----	:							:	CONFIDENCE							:					:		:	
<---	:	LAND (GROUND) PLATFORM						:							:							:		:
-----	:							:							:							:		:
<---	:							:							:							:		:
-----	:	SPARE						:							:							:		:
<---	:							:							:							:		:

WORD TITLE: PARAMETRIC INFORMATION CONTINUATION WORD 5

49	48	47	46	45	44	43	42:	41	40	39	38	37	36	35	34	33	32	31	30:	29	28	27	26	25			
								:	SPACE SPECIFIC TYPE											:	SPACE PLATFORM ACTIVITY						
								:	AIR SPECIFIC TYPE											:	AIR PLATFORM ACTIVITY						
								:	SURFACE (MARITIME) SPECIFIC TYPE											:	AIR PLATFORM ACTIVITY						
								:	SUBSURFACE (MARITIME) SPECIFIC TYPE											:	SURFACE (MARITIME) PLATFORM ACTIVITY						
<---									:	LAND (GROUND) SPECIFIC TYPE											:	SUBSURFACE (MARITIME) PLATFORM ACTIVITY					
								:	SPARE											:	SPARE						
								:												LAND (GROUND) PLATFORM ACTIVITY							
								:												SPARE							
								:																			
								:	12											:	7						

:	69	68	67	66	65	64	63	62	61	60	59	58:	57	56	55	54	53	52	51	50	
:													:								
:	LOCAL DISCRETE IDENTIFIER												:	SPARE							
:													:								
:	12												:	16							

WORD DESCRIPTION

WORD NUMBER: J14.0C5

WORD TITLE: PARAMETRIC INFORMATION CONTINUATION WORD 5

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550 001		WORD FORMAT	0-	1 2	01
1551 001		CONTINUATION WORD LABEL	2-	6 5	00101
748 001		NATIONALITY/ALLIANCE OF TRACK	7-	13 7	
431 004		PLATFORM EVALUATION CONFIDENCE	14-	16 3	
1797 005		SPACE PLATFORM	17-	22 6	SEE NOTE 1.
1797 001		AIR PLATFORM	17-	22 6	SEE NOTE 1.
1797 002		SURFACE (MARITIME) PLATFORM	17-	22 6	SEE NOTE 1.
1797 003		SUBSURFACE (MARITIME) PLATFORM	17-	22 6	SEE NOTE 1.
1797 004		LAND (GROUND) PLATFORM	17-	22 6	SEE NOTE 1.
756 006		SPARE	17-	22 6	
1798 005		SPACE PLATFORM ACTIVITY	23-	29 7	SEE NOTE 2.
1798 001		AIR PLATFORM ACTIVITY	23-	29 7	SEE NOTE 2.
1798 002		SURFACE (MARITIME) PLATFORM ACTIVITY	23-	29 7	SEE NOTE 2.
1798 003		SUBSURFACE (MARITIME) PLATFORM ACTIVITY	23-	29 7	SEE NOTE 2.
1798 004		LAND (GROUND) PLATFORM ACTIVITY	23-	29 7	SEE NOTE 2.
756 007		SPARE	23-	29 7	
749 002		SPACE SPECIFIC TYPE	30-	41 12	
804 001		AIR SPECIFIC TYPE	30-	41 12	
808 001		SURFACE (MARITIME) SPECIFIC TYPE	30-	41 12	
809 001		SUBSURFACE (MARITIME) SPECIFIC TYPE	30-	41 12	
810 001		LAND (GROUND) SPECIFIC TYPE	30-	41 12	
756 012		SPARE	30-	41 12	
756 016		SPARE	42-	57 16	
754 001		LOCAL DISCRETE IDENTIFIER	58-	69 12	

J14.0C5 WORD NOTES
NOTE 1 Environment/Category - Platform (Sheet 1 of 5)

PLATFORM	ENVIRONMENT/CATEGORY						
	0	1	2	3	4	5	6-7
	NO STATEMENT/ UNKNOWN	SPACE	AIR	SURFACE (MARITIME)	SUBSURFACE (MARITIME)	LAND (GROUND)	UNDEFINED
0	NO STATEMENT	NO STATEMENT	NO STATEMENT	NO STATEMENT	NO STATEMENT	NO STATEMENT	UNDEFINED
1	ILLEGAL	SATELLITE	FIGHTER	AIRCRAFT CARRIER (CV)	SUBMARINE PROPULSION UNKNOWN	TROOP CONCENTRATION/UNIT	UNDEFINED
2	ILLEGAL	BASE	FIGHTER BOMBER	BATTLESHIP	DIESEL ELECTRIC SUBMARINE GENERAL	HEADQUARTER COMPLEX	UNDEFINED
3	ILLEGAL	WEAPON	ATTACK	CRUISER	DIESEL ELECTRIC ATTACK SUBMARINE	COMMAND/CONTROL COMMAND AND CONTROL CENTER	UNDEFINED
4	ILLEGAL	TRANSPORT	BOMBER	DESTROYER	DIESEL ELECTRIC MISSILE SUBMARINE	ASSEMBLY AREA	UNDEFINED
5	ILLEGAL	PATROL	RECONNAISSANCE	FRIGATE	DIESEL ELECTRIC BALLISTIC MISSILE SUBMARINE	INSTALLATION/FACILITY, MILITARY	UNDEFINED
6	ILLEGAL	SUPPORT	TANKER	FAST PATROL BOAT	TYPE 1 DIESEL	INSTALLATION/FACILITY, CIVILIAN	UNDEFINED
7	ILLEGAL	DEBRIS	TANKER (BOOM ONLY)	AMPHIBIOUS	TYPE 2 DIESEL	AIRFIELD/AIRBASE	UNDEFINED
8	ILLEGAL	DECOY	TANKER (DROGUE ONLY)	LHA/LHD	TYPE 3 DIESEL	PORT/HARBOR FACILITY	UNDEFINED
9	ILLEGAL	UNDEFINED	INTERCEPTOR	AMPHIBIOUS ASSAULT COMMAND SHIP (LCC)	NUCLEAR SUBMARINE GENERAL	STORAGE SITE	UNDEFINED
10	ILLEGAL	UNDEFINED	TRANSPORT	LANDING CRAFT (LC)	NUCLEAR ATTACK SUBMARINE	TACTICAL POSITION	UNDEFINED

5.3-333

MIL-STD-6016B

J14.0C5 WORD NOTES (Continued)
NOTE 1 Environment/Category - Platform (Sheet 2 of 5)

PLATFORM	ENVIRONMENT/CATEGORY						
	0	1	2	3	4	5	6-7
	NO STATEMENT/ UNKNOWN	SPACE	AIR	SURFACE (MARITIME)	SUBSURFACE (MARITIME)	LAND (GROUND)	UNDEFINED
11	ILLEGAL	UNDEFINED	AIRBORNE COMMAND POST (ACP)	TROOP SHIP	NUCLEAR MISSILE SUBMARINE	FORTIFICATION	UNDEFINED
12	ILLEGAL	UNDEFINED	MISSILE CARRIER	TANKER/OILER	NUCLEAR BALLISTIC MISSILE SUBMARINE	INTERSECTION	UNDEFINED
13	ILLEGAL	UNDEFINED	MISSILE	AUXILIARY SHIP	TYPE I NUCLEAR	CONVOY	UNDEFINED
14	ILLEGAL	UNDEFINED	ELECTRONIC WARFARE (EW)	MINE WARFARE SHIP	TYPE II NUCLEAR	COMBAT VEHICLE	UNDEFINED
15	ILLEGAL	UNDEFINED	ANTISUBMARINE WARFARE (ASW)	MINE COUNTERMEASURES MARITIME VESSEL (MCMV)	TYPE III NUCLEAR	COMBAT SUPPORT VEHICLE	UNDEFINED
16	ILLEGAL	UNDEFINED	AIRBORNE EARLY WARNING AND CONTROL (AEW&C)	HOSPITAL SHIP	TYPE IV NUCLEAR	VEHICLE, OTHER	UNDEFINED
17	ILLEGAL	UNDEFINED	MARITIME PATROL AIRCRAFT (MPA)	SURFACED SUBMARINE	TYPE V NUCLEAR	TANK	UNDEFINED
18	ILLEGAL	UNDEFINED	SEARCH AND RESCUE (SAR)	HYDROFOIL	NON-SUBMARINE	TRAIN	UNDEFINED
19	ILLEGAL	UNDEFINED	DRONE	AIR CUSHION VEHICLE	SURFACE VESSEL	REMOTELY PILOTED VEHICLE	UNDEFINED
20	ILLEGAL	UNDEFINED	REMOTELY PILOTED VEHICLE (RPV)	INTELLIGENCE COLLECTOR	TORPEDO	MORTAR	UNDEFINED
21	ILLEGAL	UNDEFINED	FIXED WING GUNSHIP	SURVEY VESSEL	MINE	FIELD ARTILLERY	UNDEFINED
22	ILLEGAL	UNDEFINED	CIVIL, AIRLINER	NON-MILITARY	DECOY	AIR DEFENSE ARTILLERY	UNDEFINED
23	ILLEGAL	UNDEFINED	CIVIL, GENERAL	LANDING PLATFORM	WRECK	ROCKET LAUNCHER	UNDEFINED

5.3-334

MIL-STD-6016B

J14.0C5 WORD NOTES (Continued)
NOTE 1 Environment/Category - Platform (Sheet 3 of 5)

PLATFORM	ENVIRONMENT/CATEGORY						
	0	1	2	3	4	5	6-7
	NO STATEMENT/ UNKNOWN	SPACE	AIR	SURFACE (MARITIME)	SUBSURFACE (MARITIME)	LAND (GROUND)	UNDEFINED
24	ILLEGAL	UNDEFINED	LIGHTER THAN AIR (LTA)	LANDING SHIP	SEABED PIPELINE	MISSILE LAUNCHER	UNDEFINED
25	ILLEGAL	UNDEFINED	GLIDER	COMMAND	FISH/MARINE LIFE	SPECIAL WEAPON	UNDEFINED
26	ILLEGAL	UNDEFINED	DECOY	OCEAN RESEARCH	SWIMMER/FROGMAN	BRIDGE	UNDEFINED
27	ILLEGAL	UNDEFINED	HELICOPTER (HELO)	PATROL	KNUCKLE/WAKE	BUILDING/STRUCTURE	UNDEFINED
28	ILLEGAL	UNDEFINED	ATTACK HELICOPTER	SUPPORT	ATTACK SUBMARINE	POWER FACILITY	UNDEFINED
29	ILLEGAL	UNDEFINED	HELICOPTER GUNSHIP	FISHING VESSEL	CRUISE MISSILE LAUNCHER	RAIL FACILITY	UNDEFINED
30	ILLEGAL	UNDEFINED	ANTISUBMARINE WARFARE HELICOPTER (ASW HELO)	MERCHANT VESSEL	PINNACLE/SEA MOUNTAIN	TERRAIN	UNDEFINED
31	ILLEGAL	SPACE GENERAL	MINE WARFARE HELICOPTER	PATROL CRAFT ESCORT	NON-MILITARY SUBMERSIBLE	NAVAID SITE	UNDEFINED
32	ILLEGAL	UNDEFINED	TRANSPORT HELICOPTER	AMPHIBIOUS GENERAL ASSAULT	UNDEFINED	COMMUNICATION SITE	UNDEFINED
33	ILLEGAL	UNDEFINED	TACTICAL SUPPORT	MISSILE CONTROL UNIT	TYPE VI NUCLEAR	RADAR SITE	UNDEFINED
34	ILLEGAL	UNDEFINED	PATROL	DECOY	TYPE VII NUCLEAR	ANTENNA/EMITTER	UNDEFINED
35	ILLEGAL	UNDEFINED	MISCELLANEOUS FIXED WING	UNDEFINED	CONVENTIONAL (COMMAND AND CONTROL)	BUFFER CENTER	UNDEFINED
36	ILLEGAL	UNDEFINED	MISSILE CONTROL UNIT	UNDEFINED	CONVENTIONAL (AUXILIARY)	ELECTRONIC WARFARE SITE	UNDEFINED

5.3-335

MIL-STD-6016B

J14.0C5 WORD NOTES (Continued)
NOTE 1 Environment/Category - Platform (Sheet 4 of 5)

PLATFORM	ENVIRONMENT/CATEGORY						
	0	1	2	3	4	5	6-7
	NO STATEMENT/ UNKNOWN	SPACE	AIR	SURFACE (MARITIME)	SUBSURFACE (MARITIME)	LAND (GROUND)	UNDEFINED
37	ILLEGAL	UNDEFINED	SURFACE-TO-AIR MISSILE (SAM)	UNDEFINED	NUCLEAR (COMMAND AND CONTROL)	SURVEILLANCE SITE	UNDEFINED
38	ILLEGAL	UNDEFINED	AIR-TO-SURFACE MISSILE (ASM)	UNDEFINED	UNDEFINED	BRIDGING EQUIPMENT	UNDEFINED
39	ILLEGAL	UNDEFINED	SURFACE-TO- SURFACE MISSILE (SSM)	UNDEFINED	UNDEFINED	MINE WARFARE EQUIPMENT	UNDEFINED
40	ILLEGAL	UNDEFINED	LOGISTIC	UNDEFINED	UNDEFINED	SURFACE-TO-AIR MISSILE (SAM) SITE	UNDEFINED
41	ILLEGAL	UNDEFINED	AIR-TO-AIR MISSILE (AAM)	UNDEFINED	UNDEFINED	MARITIME HEADQUARTERS	UNDEFINED
42	ILLEGAL	UNDEFINED	SUBSURFACE-TO- SURFACE MISSILE	UNDEFINED	UNDEFINED	AIR SUPPORT RADAR TEAM (ASRT)	UNDEFINED
43	ILLEGAL	UNDEFINED	SURFACE-TO- SUBSURFACE MISSILE	UNDEFINED	UNDEFINED	DIRECT AIR SUPPORT CENTER (DASC)	UNDEFINED
44	ILLEGAL	UNDEFINED	CRUISE MISSILE	UNDEFINED	UNDEFINED	FORWARD AIR CONTROL PARTY (FACP)	UNDEFINED
45	ILLEGAL	UNDEFINED	BALLISTIC MISSILE	UNDEFINED	UNDEFINED	TACTICAL OPERATIONS CENTER (TOC)	UNDEFINED
46	ILLEGAL	UNDEFINED	AIRBORNE LAND SURVEILLANCE	UNDEFINED	UNDEFINED	TACTICAL DATA SYSTEMS (TDS)	UNDEFINED
47	ILLEGAL	UNDEFINED	AIRBORNE LASER	UNDEFINED	UNDEFINED	DECOY	UNDEFINED

5.3-336

MIL-STD-6016B

J14.0C5 WORD NOTES (Continued)
NOTE 1 Environment/Category - Platform (Sheet 5 of 5)

PLATFORM	ENVIRONMENT/CATEGORY						
	0	1	2	3	4	5	6-7
	NO STATEMENT/ UNKNOWN	SPACE	AIR	SURFACE (MARITIME)	SUBSURFACE (MARITIME)	LAND (GROUND)	UNDEFINED
48	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	TRACKED VEHICLE	UNDEFINED
49	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	MISSILE CONTROL UNIT	THEATER HIGH ALTITUDE AREA DEFENSE (THAAD)	UNDEFINED
50	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	JOINT TACTICAL GROUND STATION (JTAGS)	UNDEFINED
51	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	ARMOR	UNDEFINED
52	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	CAVALRY	UNDEFINED
53	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	ENGINEER	UNDEFINED
54	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	AIRBORNE/SPECIAL OPERATIONS	UNDEFINED
55	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	AVIATION	UNDEFINED
56	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	AIR DEFENSE SITE	UNDEFINED
57	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	BALLISTIC MISSILE DEFENSE SITE	UNDEFINED
58 • • • 61	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
62	ILLEGAL	BALLISTIC MISSILE GENERAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
63	ILLEGAL	RESET TO NO STATEMENT	RESET TO NO STATEMENT	RESET TO NO STATEMENT	RESET TO NO STATEMENT	RESET TO NO STATEMENT	UNDEFINED

5.3-337

MIL-STD-6016B

J14.0C5 WORD NOTES (Continued)
NOTE 2 Environment/Category - Platform Activity (Sheet 1 of 4)

PLATFORM ACTIVITY	E N V I R O N M E N T / C A T E G O R Y						
	0	1	2	3	4	5	6-7
	NO STATEMENT/ UNKNOWN	SPACE	AIR	SURFACE (MARITIME)	SUBSURFACE (MARITIME)	LAND (GROUND)	UNDEFINED
0	NO STATEMENT	NO STATEMENT	NO STATEMENT	NO STATEMENT	NO STATEMENT	NO STATEMENT	UNDEFINED
1	ILLEGAL	RECONNAISSANCE	RECONNAISSANCE	AIR WARFARE SUPPORT	RECONNAISSANCE	HOLDING	UNDEFINED
2	ILLEGAL	ANTISPACE WARFARE	OVER THE HORIZON TARGETING (OTHT)	OVER THE HORIZON TARGETING (OTHT)	OVER THE HORIZON TARGETING (OTHT)	DELAYING	UNDEFINED
3	ILLEGAL	TELEVISION	TRAINING	TRAINING	TRAINING	MOVING	UNDEFINED
4	ILLEGAL	LOGISTICS	LOGISTICS SUPPORT	LOGISTICS SUPPORT	DIVING	DETECTING	UNDEFINED
5	ILLEGAL	ANTISURFACE WARFARE	ANTISURFACE WARFARE	ANTISURFACE WARFARE	ANTISURFACE WARFARE	ACQUIRING	UNDEFINED
6	ILLEGAL	ELECTRONIC WARFARE (EW)	ELECTRONIC WARFARE (EW)	ELECTRONIC WARFARE (EW)	ELECTRONIC WARFARE (EW)	ENGAGING	UNDEFINED
7	ILLEGAL	SURVEILLANCE	SURVEILLANCE	FISHERY PROTECTION	SURVEILLANCE	ADVANCING	UNDEFINED
8	ILLEGAL	DATA LINK	SEARCH AND RESCUE (SAR)	SEARCH AND RESCUE (SAR)	SEARCH AND RESCUE (SAR)	ANTIAIR ATTACK	UNDEFINED
9	ILLEGAL	ELECTRONIC WARFARE SUPPORT (ES)	ESCORTING	ESCORTING	ESCORTING	AMPHIBIOUS ATTACK	UNDEFINED
10	ILLEGAL	ELECTRONIC ATTACK (EA)	MINELAYING	MINELAYING	MINELAYING	FIRING/LAUNCHING	UNDEFINED
11	ILLEGAL	COMMUNICATIONS	TRANSITING	TRANSITING	TRANSITING	CONVENTIONAL ATTACK ASSAULT	UNDEFINED
12	ILLEGAL	RETURN TO BASE (RTB)	SPECIAL WEAPONS ATTACK	NAVAL GUNFIRE SUPPORT	SPECIAL WEAPONS ATTACK	SPECIAL WEAPONS ATTACK	UNDEFINED
13	ILLEGAL	UNDEFINED	INTRUDING	INTRUDING	SURFACING	DEMOLITION	UNDEFINED
14	ILLEGAL	UNDEFINED	ELECTRONIC WARFARE SUPPORT (ES)	AMPHIBIOUS WARFARE	AMPHIBIOUS WARFARE	OVER THE HORIZON TARGETING (OTHT)	UNDEFINED
15	ILLEGAL	UNDEFINED	COMMUNICATIONS RELAY	INTELLIGENCE COLLECTING	INTELLIGENCE COLLECTING	TRANSITING	UNDEFINED
16	ILLEGAL	UNDEFINED	PATROL (OCEAN SURVEILLANCE)	PATROL	PATROL	RETURN TO BASE	UNDEFINED
17	ILLEGAL	UNDEFINED	AIRLIFT (TRANSPORT)	TRANSPORT	TRANSPORT	DEPLOYING	UNDEFINED
18	ILLEGAL	UNDEFINED	ANTISUBMARINE WARFARE (ASW)	ANTISUBMARINE WARFARE (ASW)	ANTISUBMARINE WARFARE (ASW)	EMISSION CONTROL (EMCON)	UNDEFINED
19	ILLEGAL	UNDEFINED	SHADOWING/INTERVENING	SHADOWING/INTERVENING	SHADOWING/INTERVENING	RIVER CROSSING	UNDEFINED
20	ILLEGAL	UNDEFINED	TOWING	TOWING	BOTTOMING	LOADING	UNDEFINED
21	ILLEGAL	UNDEFINED	AIR ASSAULT	SPECIAL WARFARE	SPECIAL WARFARE	TOWING	UNDEFINED
22	ILLEGAL	UNDEFINED	INTERCEPTION	STRIKE WARFARE	STIKE WARFARE	BUILDING FORTIFICATION BARRIER	UNDEFINED
23	ILLEGAL	UNDEFINED	ELECTRONIC ATTACK (EA)	ANTIAIR WARFARE	CLANDESTINE OPERATIONS	CLEARING BARRIER	UNDEFINED

5.3-338

MIL-STD-6016B

J14.0C5 WORD NOTES (Continued)
NOTE 2 Environment/Category - Platform Activity (Sheet 2 of 4)

PLATFORM ACTIVITY	E N V I R O N M E N T / C A T E G O R Y						
	0	1	2	3	4	5	6-7
	NO STATEMENT/ UNKNOWN	SPACE	AIR	SURFACE (MARITIME)	SUBSURFACE (MARITIME)	LAND (GROUND)	UNDEFINED
24	ILLEGAL	UNDEFINED	POLICING	FISHING	SNORKELING	RECOVERING EQUIPMENT	UNDEFINED
25	ILLEGAL	UNDEFINED	CONVENTIONAL ATTACK	PICKETING	CONVENTIONAL ATTACK	MINE SWEEPING	UNDEFINED
26	ILLEGAL	UNDEFINED	MEDICAL EVACUATION (MEDEVAC)	MINE COUNTERMEASURES	MINE COUNTERMEASURES	MINE LAYING	UNDEFINED
27	ILLEGAL	UNDEFINED	MINE COUNTERMEASURES	MINE WARFARE	MINE WARFARE	JAMMING	UNDEFINED
28	ILLEGAL	UNDEFINED	SEARCH	MARKING	MARKING	RECONNAISSANCE PATROLLING	UNDEFINED
29	ILLEGAL	UNDEFINED	REFUELING/TANKING	NONCOMBATANT OPERATIONS	NONCOMBATANT OPERATIONS	SEARCH AND RESCUE (SAR)	UNDEFINED
30	ILLEGAL	UNDEFINED	INTERDICTION	UNDERWAY REPLENISHMENT	DIRECT SUPPORT	TRAINING	UNDEFINED
31	ILLEGAL	UNDEFINED	COMBAT AIR PATROL (CAP)	SURVEYING	VIDEO DATA LINKING (TARGETING)	MEDICAL EVACUATION (MEDEVAC)	UNDEFINED
32	ILLEGAL	UNDEFINED	FORWARD AIR CONTROLLER (FAC)	ELECTRONIC WARFARE SUPPORT (ES)	UNDEFINED	ESCORTING	UNDEFINED
33	ILLEGAL	UNDEFINED	VERY IMPORTANT PERSON (VIP) FLIGHT	ELECTRONIC ATTACK (EA)	UNDEFINED	TRANSPORTING	UNDEFINED
34	ILLEGAL	UNDEFINED	NONCOMBATANT OPERATIONS	FLIGHT OPERATIONS	UNDEFINED	SCREENING	UNDEFINED
35	ILLEGAL	UNDEFINED	CLOSE AIR SUPPORT (CAS)	VIDEO DATA LINKING (TARGETING)	UNDEFINED	SUPPORTING	UNDEFINED
36	ILLEGAL	UNDEFINED	AIRBORNE EARLY WARNING (AEW)	PLANE GUARD	UNDEFINED	REPAIRING	UNDEFINED
37	ILLEGAL	UNDEFINED	GROUND ATTACK TACTICS (GAT)	RESCUE SHIP/LIFEGUARD	UNDEFINED	REFUELING	UNDEFINED
38	ILLEGAL	UNDEFINED	AIRBORNE COMMAND POST (ACP)	UNDEFINED	UNDEFINED	NEUTRALIZING	UNDEFINED
39	ILLEGAL	UNDEFINED	RESCUE COMBAT AIR PATROL (RESCAP)	UNDEFINED	UNDEFINED	TARGETING	UNDEFINED
40	ILLEGAL	UNDEFINED	SURFACE COMBAT AIR PATROL (SUCAP)	UNDEFINED	UNDEFINED	BYPASSING	UNDEFINED
41	ILLEGAL	UNDEFINED	TANKING	UNDEFINED	UNDEFINED	CLOSING	UNDEFINED
42	ILLEGAL	UNDEFINED	SPOTTING	UNDEFINED	UNDEFINED	CONCENTRATING	UNDEFINED
43	ILLEGAL	UNDEFINED	STRIKE WARFARE	UNDEFINED	UNDEFINED	DEFENDING	UNDEFINED
44	ILLEGAL	UNDEFINED	SPECIAL	UNDEFINED	UNDEFINED	DISENGAGING	UNDEFINED
45	ILLEGAL	UNDEFINED	HIJACK	UNDEFINED	UNDEFINED	INFILTRATING	UNDEFINED
46	ILLEGAL	UNDEFINED	JAMMER	UNDEFINED	UNDEFINED	INTERDICTING	UNDEFINED

5.3-339

MIL-STD-6016B

J14.0C5 WORD NOTES (Continued)
NOTE 2 Environment/Category - Platform Activity (Sheet 3 of 4)

PLATFORM ACTIVITY	ENVIRONMENT / CATEGORY						
	0 NO STATEMENT/ UNKNOWN	1 SPACE	2 AIR	3 SURFACE (MARITIME)	4 SUBSURFACE (MARITIME)	5 LAND (GROUND)	6-7 UNDEFINED
47	ILLEGAL	UNDEFINED	TROOPLIFT	UNDEFINED	UNDEFINED	LANDING	UNDEFINED
48	ILLEGAL	UNDEFINED	XRAY	UNDEFINED	UNDEFINED	OCCUPYING	UNDEFINED
49	ILLEGAL	UNDEFINED	ANTIAIR WARFARE (AAW)	UNDEFINED	UNDEFINED	DISPERSING	UNDEFINED
50	ILLEGAL	UNDEFINED	COMMAND AND CONTROL	RETURN TO BASE (RTB)	RETURN TO BASE (RTB)	SUPPLY/RESUPPLY	UNDEFINED
51	ILLEGAL	SPACE ACTIVITY 1	COUNTER-AIR-WARFARE	UNDEFINED	UNDEFINED	RETROGRADE WITHDRAWING	UNDEFINED
52	ILLEGAL	SPACE ACTIVITY 2	RETURN TO BASE (RTB)	UNDEFINED	UNDEFINED	TRANSMITTING	UNDEFINED
53	ILLEGAL	SPACE ACTIVITY 3	MINE WARFARE	UNDEFINED	UNDEFINED	ELECTRONIC WARFARE SUPPORT (ES)	UNDEFINED
54	ILLEGAL	SPACE ACTIVITY 4	CHAFF LAYING	UNDEFINED	UNDEFINED	ELECTRONIC ATTACK (EA)	UNDEFINED
55	ILLEGAL	SPACE ACTIVITY 5	VIDEO DATA LINKING (TARGETING)	UNDEFINED	UNDEFINED	MOVING EQUIPMENT	UNDEFINED
56	ILLEGAL	SPACE ACTIVITY 6	DIPPING	UNDEFINED	UNDEFINED	POWER UP AND MANNED, NOT EMITTING	UNDEFINED
57	ILLEGAL	SPACE ACTIVITY 7	RESCUE HELO	UNDEFINED	UNDEFINED	PREPARATION FOR LAUNCH	UNDEFINED
58	ILLEGAL	SPACE ACTIVITY 8	ORBITING	UNDEFINED	UNDEFINED	SITE SHUT DOWN TO UNPOWERED SATUS	UNDEFINED
59	ILLEGAL	SPACE ACTIVITY 9	UNDER RECALL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
60	ILLEGAL	SPACE ACTIVITY 10	ENGAGING	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
61	ILLEGAL	SPACE ACTIVITY 11	ENGAGING (PRIORITY KILL)	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
62	ILLEGAL	SPACE ACTIVITY 12	INVESTIGATING	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
63	ILLEGAL	UNDEFINED	CLEARED TO DROP	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
64	ILLEGAL	UNDEFINED	INTERVENING	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
65	ILLEGAL	UNDEFINED	DIVERTING	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
66	ILLEGAL	UNDEFINED	AIR-TO-GROUND	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
67	ILLEGAL	UNDEFINED	AIR-TO-AIR	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
68	ILLEGAL	UNDEFINED	PRECISION BOMBING	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
69	ILLEGAL	UNDEFINED	LASER DESIGNATION	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED

5.3-340

MIL-STD-6016B

J14.0C5 WORD NOTES (Continued)
NOTE 2 Environment/Category - Platform Activity (Sheet 4 of 4)

PLATFORM ACTIVITY	E N V I R O N M E N T / C A T E G O R Y						
	0	1	2	3	4	5	6-7
	NO STATEMENT/ UNKNOWN	SPACE	AIR	SURFACE (MARITIME)	SUBSURFACE (MARITIME)	LAND (GROUND)	UNDEFINED
70	ILLEGAL	UNDEFINED	BEACON BOMBING	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
71	ILLEGAL	UNDEFINED	SHADOWING	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
72	ILLEGAL	UNDEFINED	COVERING	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
73	ILLEGAL	UNDEFINED	VISUAL IDENTIFICATION	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
74	ILLEGAL	UNDEFINED	HIGH ENERGY LASING	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
75 • • 114	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
115	ILLEGAL	BALLISTIC MISSILE ACTIVITY 1	AIR ACTIVITY 1	SURFACE (MARITIME) ACTIVITY 1	SUBSURFACE (MARITIME) ACTIVITY 1	LAND (GROUND) ACTIVITY 1	UNDEFINED
116	ILLEGAL	BALLISTIC MISSILE ACTIVITY 2	AIR ACTIVITY 2	SURFACE (MARITIME) ACTIVITY 2	SUBSURFACE (MARITIME) ACTIVITY 2	LAND (GROUND) ACTIVITY 2	UNDEFINED
117	ILLEGAL	BALLISTIC MISSILE ACTIVITY 3	AIR ACTIVITY 3	SURFACE (MARITIME) ACTIVITY 3	SUBSURFACE (MARITIME) ACTIVITY 3	LAND (GROUND) ACTIVITY 3	UNDEFINED
118	ILLEGAL	BALLISTIC MISSILE ACTIVITY 4	AIR ACTIVITY 4	SURFACE (MARITIME) ACTIVITY 4	SUBSURFACE (MARITIME) ACTIVITY 4	LAND (GROUND) ACTIVITY 4	UNDEFINED
119	ILLEGAL	BALLISTIC MISSILE ACTIVITY 5	AIR ACTIVITY 5	SURFACE (MARITIME) ACTIVITY 5	SUBSURFACE (MARITIME) ACTIVITY 5	LAND (GROUND) ACTIVITY 5	UNDEFINED
120	ILLEGAL	BALLISTIC MISSILE ACTIVITY 6	AIR ACTIVITY 6	SURFACE (MARITIME) ACTIVITY 6	SUBSURFACE (MARITIME) ACTIVITY 6	LAND (GROUND) ACTIVITY 6	UNDEFINED
121	ILLEGAL	BALLISTIC MISSILE ACTIVITY 7	AIR ACTIVITY 7	SURFACE (MARITIME) ACTIVITY 7	SUBSURFACE (MARITIME) ACTIVITY 7	LAND (GROUND) ACTIVITY 7	UNDEFINED
122	ILLEGAL	BALLISTIC MISSILE ACTIVITY 8	AIR ACTIVITY 8	SURFACE (MARITIME) ACTIVITY 8	SUBSURFACE (MARITIME) ACTIVITY 8	LAND (GROUND) ACTIVITY 8	UNDEFINED
123	ILLEGAL	BALLISTIC MISSILE ACTIVITY 9	AIR ACTIVITY 9	SURFACE (MARITIME) ACTIVITY 9	SUBSURFACE (MARITIME) ACTIVITY 9	LAND (GROUND) ACTIVITY 9	UNDEFINED
124	ILLEGAL	BALLISTIC MISSILE ACTIVITY 10	AIR ACTIVITY 10	SURFACE (MARITIME) ACTIVITY 10	SUBSURFACE (MARITIME) ACTIVITY 10	LAND (GROUND) ACTIVITY 10	UNDEFINED
125	ILLEGAL	BALLISTIC MISSILE ACTIVITY 11	AIR ACTIVITY 11	SURFACE (MARITIME) ACTIVITY 11	SUBSURFACE (MARITIME) ACTIVITY 11	LAND (GROUND) ACTIVITY 11	UNDEFINED
126	ILLEGAL	BALLISTIC MISSILE ACTIVITY 12	AIR ACTIVITY 12	SURFACE (MARITIME) ACTIVITY 12	SUBSURFACE (MARITIME) ACTIVITY 12	LAND (GROUND) ACTIVITY 12	UNDEFINED
127	ILLEGAL	RESET TO NO STATEMENT	RESET TO NO STATEMENT	RESET TO NO STATEMENT	RESET TO NO STATEMENT	RESET TO NO STATEMENT	UNDEFINED

5.3-341

MIL-STD-6016B

FIELD CODING FOR J14.0C5

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
748	001	NATIONALITY/ALLIANCE OF TRACK -----		THE COUNTRY OF ORIGIN OR POLITICAL ENTITY OF A REPORTED OBJECT OR TRACK.
		NO STATEMENT	0	
		NAT/ALL-1 THROUGH NAT/ALL-28	1 THROUGH 28	THE NATION OR POLITICAL ENTITY OF THE TRACK IS TO BE DEFINED BY THE INDIVIDUAL THEATER OF OPERATION.
		DISUSED	29	
		USSR (SOVIET UNION)	30	
		NATO	31	
		BELGIUM	32	
		CYPRUS	33	
		DENMARK	34	
		FRANCE	35	
		GERMANY	36	
		FINLAND	37	
		GREECE	38	
		ICELAND	39	
		IRELAND	40	
		ITALY	41	
		NETHERLANDS	42	
		NORWAY	43	
		PORTUGAL	44	
		SPAIN	45	
		SWEDEN	46	
		SWITZERLAND	47	
		TURKEY	48	
		UNITED KINGDOM	49	
		ALBANIA	50	
		AUSTRIA	51	
		BULGARIA	52	
		CZECHOSLOVAKIA	53	
		DISUSED	54	
		HUNGARY	55	
		POLAND	56	
		RUMANIA	57	
		YUGOSLAVIA	58	
		CANADA	59	
		UNITED STATES OF AMERICA	60	
		EGYPT	61	
		IRAN	62	
		IRAQ	63	
		ISRAEL	64	
		JORDAN	65	

FIELD CODING FOR J14.0C5

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
748	001	NATIONALITY/ALLIANCE OF TRACK	(CONTINUED)	

		LEBANON	66	
		SAUDI ARABIA	67	
		SYRIA	68	
		ALGERIA	69	
		ETHIOPIA	70	
		LIBERIA	71	
		LIBYA	72	
		SOUTH AFRICA	73	
		INDIA	74	
		PAKISTAN	75	
		CAMBODIA	76	
		LAOS	77	
		THAILAND	78	
		VIETNAM	79	
		CHINA, PEOPLE'S REPUBLIC	80	
		CHINA, REPUBLIC	81	
		KOREA, NORTH	82	
		KOREA, REPUBLIC	83	
		JAPAN	84	
		PHILIPPINES	85	
		AUSTRALIA	86	
		NEW ZEALAND	87	
		ARGENTINA	88	
		BRAZIL	89	
		CHILE	90	
		COLUMBIA	91	
		MEXICO	92	
		PANAMA	93	
		PERU	94	
		VENEZUELA	95	
		CUBA	96	
		DOMINICAN REPUBLIC	97	
		UNITED NATIONS FORCE	98	
		KUWAIT	99	
		YEMEN ARAB REPUBLIC	100	
		GUINEA	101	
		MALAGASY (MADAGASCAR)	102	
		MOROCCO	103	
		NIGERIA	104	
		SENEGAL	105	
		ZIMBABWE	106	
		SPANISH NORTH AFRICA	107	
		SUDAN	108	

5.3-343

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

748	001	NATIONALITY/ALLIANCE OF TRACK	(CONTINUED)	
-----	-----	-------------------------------	-------------	--

TANZANIA	109
TUNISIA	110
UGANDA	111
BURMA	112
INDONESIA	113
MALAYSIA	114
SINGAPORE	115
BOLIVIA	116
ECUADOR	117
GUATEMALA	118
NICARAGUA	119
PARAGUAY	120
URUGUAY	121
JAMAICA	122
INTERNATIONAL RED CROSS	123
LUXEMBOURG	124
YEMEN PEOPLE'S	125
DEMOCRATIC REPUBLIC	
UNDEFINED	126
RESET TO NO STATEMENT	127

431	004	PLATFORM EVALUATION CONFIDENCE	
-----	-----	--------------------------------	--

NO STATEMENT	0
POSITIVE/CERTAIN	1
PROBABLE	2
POSSIBLE	3
LOW	4
UNDEFINED	5 THROUGH 7

749	002	SPACE SPECIFIC TYPE	
-----	-----	---------------------	--

THE PLATFORM EVALUATION CONFIDENCE IS A STATEMENT APPENDED TO A REPORT FOR THE PURPOSE OF INDICATING THE RELATIVE DEGREE OF CONFIDENCE AN EVALUATOR/OPERATOR HAS IN THE ENVIRONMENT/CATEGORY. THE PLATFORM EVALUATION CONFIDENCE IS ASSIGNED BY AN EVALUATOR/OPERATOR BASED ON INFORMATION OBTAINED FROM LOCAL SENSORS, COMPARISON OF EMITTER(S) CHARACTERISTICS TO INTELLIGENCE FILES, AND/OR INFORMATION PROVIDED BY REMOTE SOURCES.

THE SPECIFIC TYPE OF A POINT OR TRACK WITH AN ENVIRONMENT/CATEGORY

FIELD CODING FOR J14.0C5

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
749	002	SPACE SPECIFIC TYPE -----	(CONTINUED)	
				OF SPACE.
		NO STATEMENT	0	
		FROG-7	1	
		HONEST JOHN	2	
		SAKR 80	3	
		SS-21 MOD 2	4	
		SS-21 MOD 3	5	
		HAFT-I	6	
		UNDEFINED	7 THROUGH 78	
		SHORT RANGE (0-65 DM)	79	
		ALACRAN	80	
		CHENG FENG	81	
		CONDOR	82	
		HAFT II	83	
		IRAN-130	84	
		LANCE	85	
		MB/EE-150	86	
		MB/EE-300	87	
		UNDEFINED	88	
		PRITHVI	89	
		SS-1B (SCUD-A)	90	
		SS-1C (SCUD-B)	91	
		SS-21 (SCARAB)	92	
		SS-300	93	
		B-610/CJS-98 (BG510)	94	
		NHK-I	95	
		NHK-II (HYON MU)	96	
		UNDEFINED	97 THROUGH 168	
		SHORT-MEDIUM RANGE (66-200 DM)	169	
		AL-HUSAYN	170	
		UNDEFINED	171	
		HAFT III	172	
		M-9	173	
		M-11	174	
		MB/EE-600	175	
		SCUD-C	176	
		SS-23 (SPIDER)	177	
		AL HUSSEIN	178	
		UNDEFINED	179 THROUGH 242	
		MEDIUM RANGE (201-400 DM)	243	
		AL-ABBAS	244	

5.3-345

MIL-STD-6016B

FIELD CODING FOR J14.0C5

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
749	002	SPACE SPECIFIC TYPE	(CONTINUED)	

		JERICH0-I	245	
		AL HIJARAN	246	
		SONDA IV	247	
		UNDEFINED	248 THROUGH 330	
		MEDIUM-EXTENDED RANGE	331	
		(401-600 DM)		
		AL-FATAH	332	
		BADR-2000	333	
		CONDOR II	334	
		CSS-1	335	
		MB/EE-1000	336	
		SKY HORSE	337	
		SS-12A (SCALEBOARD A)	338	
		SS-12B (SCALEBOARD B)	339	
		SS1000	340	
		TIEN MA	341	
		UNDEFINED	342 THROUGH 416	
		EXTENDED RANGE (601-800	417	
		DM)		
		ARNISTON	418	
		CAPRICORNIO	419	
		JERICH0 II	420	
		NODONG-1	421	
		SS-N-5 (SERB)	422	
		UNDEFINED	423 THROUGH 496	
		EXTENDED-LONG RANGE	497	
		(801-1000 DM)		
		AGNI	498	
		AL/ABED	499	
		CC-4 (SANDAL)	500	
		CSS-5	501	
		UNDEFINED	502 THROUGH 575	
		LONG RANGE (1001-1350	576	
		DM)		
		CHEVALINE	577	
		CSS-2	578	
		CSS-3	579	
		CSS-4	580	
		CSS-N-3	581	
		M-4 SLBM	582	
		M-5 SLBM	583	
		M-20 SLBM	584	
		MIDGETMAN	585	

FIELD CODING FOR J14.0C5

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
749	002	SPACE SPECIFIC TYPE	(CONTINUED)	

		MINUTEMAN I	586	
		MINUTEMAN II	587	
		PEACEKEEPER	588	
		POLARIS A-3	589	
		POSEIDON C-3	590	
		SS-11 (SEGO)	591	
		SS-13 (SAVAGE)	592	
		SS-17 (SPANKER) MOD 1	593	
		SS-17 (SPANKER) MOD 2	594	
		SS-17 (SPANKER) MOD 3	595	
		SS-18 (SATAN) MOD 1	596	
		SS-18 (SATAN) MOD 2	597	
		SS-18 (SATAN) MOD 3	598	
		SS-20 (SABER)	599	
		SS-24 (SCALPEL)	600	
		SS-25 (SICKLE)	601	
		SS-N-6 (SAWFLY)	602	
		SS-N-8	603	
		SS-N-17 (SNIPE)	604	
		SS-N-18 (STINGRAY)	605	
		SS-N-20 (STURGEON)	606	
		SS-N-23 (SKIFF)	607	
		SSBS S-3	608	
		SSBS S-4	609	
		TRIDENT I (C-4)	610	
		TRIDENT II (D-5)	611	
		MODIFIED CSS-5	612	
		SS-19 MOD 3	613	
		UNDEFINED	614	
		NEW SOLID SLBM	615	
		CSS-NX-3	616	
		M4B	617	
		M45	618	
		UNDEFINED	619 THROUGH 786	
		>1350 DM	787	
		ABM-1B (GALOSH)	788	
		ARROW	789	
		ASTER	790	
		CORPS SAM	791	
		ERINT	792	
		HAWK	793	
		PATRIOT	794	
		SA-10 (GRUMBLE)	795	

FIELD CODING FOR J14.0C5

(SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
749	002	SPACE SPECIFIC TYPE -----	(CONTINUED)	
		SA-12A (GLADIATOR)	796	
		SA-12B (GIANT)	797	
		SA-N-6 (GRUMBLE)	798	
		SH-08 (GAZELLE)	799	
		STANDARD MISSILE BLOCK	800	
		IVA		
		THAAD	801	
		SM-2 BLOCK IV	802	
		SM-3 LEAP	803	
		UNDEFINED	804 THROUGH 876	
		INTERCEPTOR	877	
		OPERATIONAL COMMANDER	878 THROUGH 941	
		DEFINED 1-64		
		UNDEFINED	942 THROUGH 1022	
		BALLISTIC MISSILE	1023	
		GENERAL		
		UNDEFINED	1024 THROUGH 2046	
		SPACE GENERAL	2047	
		UNDEFINED	2048 THROUGH 4093	
		RESET TO NO STATEMENT	4094	
		UNDEFINED	4095	
804	001	AIR SPECIFIC TYPE -----		THE SPECIFIC TYPE OF POINT OR TRACK WITH AN ENVIRONMENT/CATEGORY OF AIR.
		NO STATEMENT	0	
		----- FIGHTER -----		
		F-4 PHANTOM II	1	
		F-5 TIGER II	2	
		F-8 CRUSADER	3	
		F-14 TOMCAT	4	
		F-15 EAGLE	5	
		F-16 FIGHTING FALCON	6	
		F-101 VOODOO	7	
		F-104 STARFIGHTER	8	
		F-105 THUNDERCHIEF	9	
		F-106 DELTA DART	10	
		F-111 (GENERAL DYNAMICS)	11	
		F/A-18 HORNET	12	

5.3-348

MIL-STD-6016B

FIELD CODING FOR J14.0C5

(SHEET 8)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		EFA	13	
		F-102	14	
		F-100	15	
		DISUSED	16	
		DISUSED	17	
		COMMANDO	18	
		DISUSED	19	
		DISUSED	20	
		J-35 DRAKEN	21	
		JAGUAR	22	
		SUPER ETENDARD	23	
		DISUSED	24 THROUGH 26	
		F-1 (MITSUBISHI)	27	
		F-35XD DRAKEN	28	
		DISUSED	29	
		HF-24 MARUT (WIND SPIRIT)	30	
		JA37 VIGGEN	31	
		DISUSED	32	
		SF-5 FREEDOM FIGHTER	33	
		IAR-91 ORAO	34	
		AJEET INVINCIBLE	35	
		KFIR C2	36	
		MIRAGE F1	37	
		MIRAGE 3	38	
		MIRAGE 5	39	
		MIRAGE 50	40	
		MIRAGE 2000	41	
		DISUSED	42	
		DISUSED	43	
		ALPHA JET	44	
		KEFIR	45	
		F-6 FARMER	46	
		F-8 FISHBED	47	
		F-9 FANTAN	48	
		F-12 (CHINA)	49	
		SU-7 FITTER	50	
		SU-9 FISHPOT	51	
		SU-11 FLAGON	52	
		SU-15 FLAGON	53	
		SU-17 FITTER	54	
		SU-19 FENCER	55	
		SU-20 FITTER	56	

FIELD CODING FOR J14.0C5

(SHEET 9)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		SU-22 FITTER	57	
		SU-24 FENCER	58	
		SU-25 FROGFOOT	59	
		TU-28 FIDDLER	60	
		TU-128 FIDDLER	61	
		MIG-21 FISHBED	62	
		MIG-23 FLOGGER	63	
		MIG-25 FOXBAT	64	
		MIG-27 FLOGGER	65	
		YAK-28 FIREBAR	66	
		YAK-36 FORGER	67	
		AAF "RAM-J"	68	
		MIG-15 FAGOT	69	
		MIG-17 FRESCO	70	
		MIG-19 FARMER	71	
		SU-27 FLANKER	72	
		MIG-29 FULCRUM	73	
		MIG-31 FOXHOUND	74	
		YAK-38 FORGER-A	75	
		F-22 RAPTOR	76	
		F-84 THUNDERSTREAK	77	
		F-86 SABRE	78	
		F/A2 SEA HARRIER	79	
		IDF CHING-KUO (TAIWAN)	80	
		JAS-39 GRIPPEN	81	
		JIAN JI-7	82	
		JIAN JI-8-2	83	
		JOINT STRIKE FIGHTER	84	
		KFIR C7	85	
		KFIR 2000	86	
		RAFALE	87	
		SU-30	88	
		SU-33 (SU-27K)	89	
		SU-34	90	
		SU-35	91	
		SU-37	92	
		SU-39	93	
		YAK-141 FREESTYLE	94	
		F-5 FRESCO	95	
		F-7 FISHBED	96	
		J-9	97	
		RT33	98	
		CF-188 HORNET	99	

FIELD CODING FOR J14.0C5

(SHEET 10)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		UNDEFINED	100	
		TORNADO F3	101	
		SEA HARRIER	102	
		F-5 NORTHROP	103	
		UNDEFINED	104 THROUGH 254	
		FIGHTER GENERAL	255	

		BOMBERS/ATTACK		

		A-4 SKYHAWK	256	
		A-6 INTRUDER	257	
		A-7 CORSAIR II	258	
		A-10 THUNDERBOLT II	259	
		A-37 DRAGONFLY	260	
		B-1 (ROCKWELL)	261	
		B-52 STRATOFORTRESS	262	
		AC-130 HERCULES	263	
		AV-8 HARRIER	264	
		F/A-18 HORNET	265	
		FB-111 (GENERAL DYNAMICS)	266	
		A-1	267	
		TA-28	268	
		DISUSED	269	
		AC-47	270	
		AC-119	271	
		AC-124	272	
		ALPHA JET	273	
		DISUSED	274 THROUGH 276	
		35XD DRAKEN	277	
		J-1 HAWK	278	
		J-1 JAESTREB	279	
		S-2	280	
		AJ37 VIGGEN	281	
		HA220 SUPER SAETA	282	
		M.B.326 (AERMACCHI)	283	
		M.B.339 (AERMACCHI)	284	
		SF 260 WARRIER	285	
		SK 60 (SAAB)	286	
		BAC 167 STRIKEMASTER	287	
		TORNADO GR-1 (IDS)	288	

FIELD CODING FOR J14.0C5

(SHEET 11)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		IL-28 BEAGLE	289	
		MI-4 BISON	290	
		TU-16 BADGER	291	
		TU-22 BLINDER	292	
		TU-22M BACKFIRE	293	
		TU-95 BEAR	294	
		TU-142 BEAR	295	
		YAK-28 BREWER	296	
		SUPER ENTENDARD	297	
		TU-160 BLACKJACK	298	
		AMX	299	
		FRS1 SEA HARRIER	300	
		FRS2 SEA HARRIER	301	
		FRS51 SEA HARRIER	302	
		F-117 NIGHTHAWK	303	
		G4 SUPER GALEB	304	
		G91Y	305	
		HAWK-2000	306	
		HAWK-100	307	
		HAWK-200	308	
		HAWK-50	309	
		HAWK-60	310	
		IA-58 PUCARA	311	
		IAR-93 ORAO	312	
		IAR-99 SOIM	313	
		JIAN JI-5M	314	
		A-5 FANTAN	315	
		L59 ALBATROS	316	
		B-2 SPIRIT	317	
		B-7 HONGZHA	318	
		1050E	319	
		A3 LEI MING	320	
		HARRIER GR4/7	321	
		TORNADO GR4	322	
		AV-8B HARRIER PLUS	323	
		CF-188 HORNET	324	
		RAFALE	325	
		UNDEFINED	326 THROUGH 510	
		BOMBER/ATTACK GENERAL	511	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	
		----- PATROL/RECON/ELECTRONIC/ TANKER/GENERAL -----		
		E-2 HAWKEYE	512	
		E-3 SENTRY (AWACS)	513	
		E-4 NEACP	514	
		EA-3	515	
		EA-6 PROWLER	516	
		EB-57 (DOUGLAS)	517	
		EC-130 HERCULES	518	
		EC-135 (BOEING)	519	
		EF-4 WILD WEASEL	520	
		EF-111 (GENERAL DYNAMICS)	521	
		EP-3 ORION	522	
		KA-3 (DOUGLAS)	523	
		KA-6 (GRUMMAN)	524	
		KC-10 EXTENDER	525	
		KC-130 HERCULES	526	
		KC-135 STRATOTANKER	527	
		O-1 BIRD DOG	528	
		O-2 (CESSNA)	529	
		OV-1 MOHAWK	530	
		OV-10 BRONCO	531	
		P-2 NEPTUNE	532	
		P-3 ORION	533	
		RC-130 HERCULES	534	
		RC-135 (BOEING)	535	
		RF-4 PHANTOM II	536	
		RF-5 (NORTHROP)	537	
		RF-8 CRUSADER	538	
		RF-14 TOMCAT	539	
		RF-104 STARFIGHTER	540	
		RP-3 ORION	541	
		RU-21 UTE	542	
		S-2 TRACKER	543	
		S-3 VIKING	544	
		SR-71 BLACKBIRD	545	
		U-2 (LOCKHEED)	546	
		U-4 AERO COMMANDER	547	
		U-5 H-500 TWIN	548	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		U-8 SEMINOLE	549	
		U-10 COURIER	550	
		UC-12 HURON	551	
		U-21 UTE	552	
		US-3 VIKING	553	
		OA-37 DRAGONFLY	554	
		TR-1	555	
		WC-130 HERCULES	556	
		E-1 TRACER	557	
		EB-66	558	
		EC-121	559	
		RA-3	560	
		SEA SCAN	561	
		FALCON 20 GUARDIAN	562	
		BR 1150 ATL1	563	
		RF-35XD DRAKEN	564	
		BN-2 MARITIME DEFENDER	565	
		DISUSED	566	THROUGH 567
		CP-140 AURORA	568	
		HS.748 COASTGUARDER	569	
		HS.801 NIMROD	570	
		DISUSED	571	
		MK.3	572	
		RJ-1 HAWK	573	
		RJ-1 JAESTREB	574	
		SS-2	575	
		PEACE SENTINEL	576	
		KC-97	577	
		AU-24	578	
		AU-23	579	
		U-21	580	
		U-17	581	
		HU-16	582	
		U-9	583	
		U-3	584	
		RU-21	585	
		NKC-135	586	
		RF-101	587	
		RF-111	588	
		RB-57	589	
		RB-66	590	
		RC-121	591	
		BE-12 MAIL	592	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		IL-38 MAY	593	
		TU-126 MOSS	594	
		BE-6	595	
		VC-10 (TANKER)	596	
		AN-12 CUB-A (ELINT)	597	
		AN-12 CUB-C (EA)	598	
		AN-12 CUB-D (EA)	599	
		IL-20 COOT-A (ELINT)	600	
		IL-76 MAINSTAY	601	
		E-8 (J STARS)	602	
		TORNADO ECR	603	
		E-6 MERCURY	604	
		EMB-111	605	
		MU-2S	606	
		A40 ALBATROS	607	
		BE42 ALBATROS	608	
		CL215 AMPHIBIAN	609	
		IAI 1125	610	
		IL22 COOT B	611	
		J32 LANSEN	612	
		SH5 HARBIN	613	
		TIER1	614	
		TIER2	615	
		TIER3	616	
		US1 (SHIN)	617	
		C-212 CASA	618	
		CESSNA 550 CITATION II	619	
		CESSNA 560 CITATION V	620	
		CL 215 CANADAIR	621	
		DORNIER 27	622	
		F-27 FOKKER	623	
		NIMROD MRA4	624	
		CP-140A AURORA/ARCTURUS	625	
		RC-135 RIVET JOINT	626	
		ATL 2	627	
		ETENDARD IV P	628	
		ALIZE	629	
		FALCON 50	630	
		MIRAGE IV	631	
		MIRAGE 2000	632	
		BR 1150 GE ATL ASW	633	
		BR 1150 GE ATL SIGINT	634	
		C-130 HERCULES TANKER	635	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		ASTOR	636	
		UNDEFINED	637 THROUGH 761	
		TANKER	762	
		RECONNAISSANCE (RECON)	763	
		ELECTRONIC WARFARE (EW)	764	
		ASW	765	
		AEW AND C	766	
		MISCELLANEOUS GENERAL	767	

		TRAINER		

		T-2 BUCKEYE	768	
		T-28 TROJAN	769	
		T-29 (CONVAIR)	770	
		T-34 MENTOR	771	
		T-37 TWEET	772	
		T-38 TALON	773	
		T-39 SABERLINER	774	
		T-41 MESCALERO	775	
		T-42 CONCHISE	776	
		T-43 (BOEING)	777	
		T-44 KING AIR	778	
		TA-4 SKYHAWK	779	
		TA-7 CORSAIR II	780	
		T-33	781	
		ALPHA JET	782	
		B3LA (SAAB)	783	
		C-101 AVIOJET	784	
		G2-A GALEB	785	
		G2-A SEAGULL	786	
		L-29 DELFIN	787	
		L-29 MAYA	788	
		L-39 ALBATROS	789	
		L-70 MILTRAINER	790	
		L-450	791	
		P.55 (PARTENAVIA)	792	
		T-2 (MITSUBISHI)	793	
		CM 170 MAGISTER	794	
		M.B.339 (AERMACCHI)	795	
		T-2 (MITSUBISHI)	796	
		CM AU/ MAGISTER	797	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	
		M.B.339 (AERMACCHI)	798	
		SF-260 (SIAI-MARCHETTI)	799	
		SH 37 VIGGEN	800	
		QH-50 DRAGEN	801	
		SK 37 VIGGEN	802	
		SK 60 (SAAB)	803	
		TB30 EPSILON	804	
		TF-35XD	805	
		TJ-1 HAWK	806	
		TJ-1 JASTRAEB	807	
		TS.11 SPARK	808	
		AW1-2 FAN TRAINER	809	
		DISUSED	810	
		HJT-16 KIRAN	811	
		MBB223 FLAMINGO	812	
		SU-11 MAIDEN	813	
		SU-15	814	
		MIG-15 MIDGET	815	
		MIG-17	816	
		MIG-21 MONGOL	817	
		MIG-23	818	
		MIG-25	819	
		YAK-11 MOOSE	820	
		YAK-18 MAX	821	
		YAK-28 MAESTRO	822	
		TF-104 STARFIGHTER	823	
		T-46A	824	
		EMB-312 TOUCAN	825	
		T-45 GOSHAWK	826	
		T-47	827	
		AS202	828	
		CT114 TUTOR	829	
		G91T (FIAT JET 1)	830	
		K8 (NAMC)	831	
		L70 VINKA	832	
		STRIKEMASTER (BAE)	833	
		T1 JAYHAWK	834	
		T4 (KAWASAKI)	835	
		CT-142 DASH 8	836	
		B-55 BARON	837	
		F-33 BONANZA	838	
		839 PILLAN-TAMIZ	839	
		CT-133 SILVERSTAR	840	

FIELD CODING FOR J14.0C5 (SHEET 17)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		UNDEFINED	841 THROUGH 1022	
		TRAINER GENERAL	1023	

		TRANSPORT/AIRLINER		

		C-1 (GRUMMAN COD)	1024	
		C-2 GREYHOUND	1025	
		C-5 GALAXY	1026	
		C-7 CARIBOU	1027	
		C-9 NIGHTINGALE	1028	
		C-12 HURON	1029	
		C-123 PROVIDER	1030	
		C-130 HERCULES	1031	
		C-135 STRATOLIFTER	1032	
		C-140 JETSTAR	1033	
		C-141 STARLIFTER	1034	
		HC-130 HERCULES	1035	
		VC-6 KING AIR	1036	
		VC-9 SKYTRAIN II	1037	
		VC-11 GULFSTREAM	1038	
		VC-137 (BOEING)	1039	
		707 (BOEING)	1040	
		720 (BOEING)	1041	
		727 (BOEING)	1042	
		737 (BOEING)	1043	
		747 (BOEING)	1044	
		757 (BOEING)	1045	
		767 (BOEING)	1046	
		L-100 HERCULES	1047	
		L-1011 TRI STAR	1048	
		DC-8 (DOUGLAS)	1049	
		DC-9 (DOUGLAS)	1050	
		DC-10 (DOUGLAS)	1051	
		C-119	1052	
		DC-130	1053	
		HC-97	1054	
		C-JM	1055	
		C-54	1056	
		C-97	1057	
		C-118	1058	
		C-119	1059	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		C-121	1060	
		C-124	1061	
		C-131	1062	
		C-133	1063	
		VC-47	1064	
		CV-54	1065	
		CV-140	1066	
		ARAVA	1067	
		CONCORDE	1068	
		ISLANDER	1069	
		SKYVAN	1070	
		TRIDENT	1071	
		A300 AIRBUS	1072	
		A310 AIRBUS	1073	
		C-1 (KAWASKI)	1074	
		C-160 TRANSALL	1075	
		C.207 AZOR	1076	
		C-212 AVIOCAR	1077	
		F27 FRIENDSHIPS	1078	
		F28 FELLOWSHIP	1079	
		G222 SAMA	1080	
		AW.660 ARGOSY	1081	
		BAC111 ONE-ELEVEN	1082	
		DHC-5 BUFFALO	1083	
		DHC-7 DASH	1084	
		AN-2 COLT	1085	
		AN-10 CAT	1086	
		AN-12 CUB	1087	
		AN-14 CLOD	1088	
		AN-22 COCK	1089	
		AN-24 COKE	1090	
		AN-26 CURL	1091	
		AN-28 CASK	1092	
		AN-30 CLANK	1093	
		AN-32 CLINE	1094	
		AN-40 (VERY LARGE TURBO-PROP)	1095	
		AN-72 COALER	1096	
		IL-12 COACH	1097	
		IL-18 COOT	1098	
		IL-62 CLASSIC	1099	
		IL-76 CANDID	1100	
		IL-86 CAMBER	1101	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		TU-114 CLEAT	1102	
		TU-134 CRUSTY	1103	
		TU-144 CHARGER	1104	
		TU-154 CARELESS	1105	
		YAK-40 CODDLING	1106	
		YAK-42 CLOBBER	1107	
		TU-104	1108	
		YAK-27	1109	
		IL-38	1110	
		DISUSED	1111	
		DO-228 LT (TRANSPORT)	1112	
		DISUSED	1113	
		AN-74	1114	
		AN-124 CONDOR	1115	
		A320 AIRBUS	1116	
		A321 AIRBUS	1117	
		A330 AIRBUS	1118	
		A340 AIRBUS	1119	
		AN-70	1120	
		AN-225 COSSACK	1121	
		BAE-125-600	1122	
		BAE146	1123	
		777 (BOEING)	1124	
		C-17 GLOBEMASTER III	1125	
		C-20 GULFSTREAM 3/4	1126	
		C-21 LEARJET 35	1127	
		C-22	1128	
		C-23 SHERPA/SHORTS 330	1129	
		C-26 METRO 3	1130	
		YS 11 (NAMC)	1131	
		CL-600 CHALLENGER	1132	
		CL-601 CHALLENGER	1133	
		CN-235M (AIRTECH)	1134	
		EMB-120 BRASILLIA ADV	1135	
		EMB-145 AMAZON	1136	
		IL-78 MIDAS	1137	
		MD-11	1138	
		MD-80	1139	
		MD-90	1140	
		PD-808	1141	
		TU-44	1142	
		V-22 OSPREY	1143	
		VC-25	1144	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		XC-2	1145	
		1124 (IAI)	1146	
		1900 (BEECH)	1147	
		330 (SHORTS)	1148	
		580 (CONVAIR)	1149	
		ATR42	1150	
		B55 BARON	1151	
		BN2 ISLANDER	1152	
		C46 COMMANDO	1153	
		CARAVELL (SUD)	1154	
		CC109 (CANADAIR)	1155	
		CHALLENGER (CANADAIR)	1156	
		DHC2	1157	
		DHC6 TWIN OTTER	1158	
		DHC8	1159	
		EMB110 BANDEIRANTE	1160	
		EMB121	1161	
		FALCON 200/FALCON 20	1162	
		FALCON 50	1163	
		FALCON 900	1164	
		FH227 FRIENDSHIP	1165	
		FOKKER 100	1166	
		FOKKER 50	1167	
		FOKKER 60	1168	
		FOKKER 70	1169	
		GROB G850	1170	
		GULFSTREAM 1	1171	
		GULFSTREAM 2	1172	
		JETSTREAM	1173	
		JETSTREAM 31	1174	
		KING AIR	1175	
		L410 TURBOJET	1176	
		LEARJET 23	1177	
		LEARJET 24	1178	
		LEARJET 25 (IMPROVED VER	1179	
		28)		
		LEARJET 35/36	1180	
		LEARJET 55 (IMPROVED VER	1181	
		28)		
		LEARJET 60	1182	
		MERLIN 2	1183	
		MERLIN 3	1184	
		MERLIN 4	1185	

FIELD CODING FOR J14.0C5

(SHEET 21)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		METRO 3	1186	
		SAAB 2000	1187	
		SAAB 340	1188	
		SABRELINER	1189	
		U6 BEAVER	1190	
		VISCOUNT	1191	
		W3 SOKOL	1192	
		Y11 (HAMC)	1193	
		Y12 (HAMC)	1194	
		Y5	1195	
		CC-115 BUFFALO	1196	
		CC-130 HERCULES	1197	
		CC-150 POLARIS	1198	
		C-235 CASA	1199	
		CC-138 TWIN OTTER	1200	
		DO-228 LM (POLLUTION	1201	
		CONTROL)		
		UNDEFINED	1202 THROUGH 1277	
		LIGHT CIVIL	1278	
		TRANSPORT/AIRLINER	1279	
		GENERAL		

		HELICOPTERS		

		AH-1 COBRA	1280	
		AH-64 APACHE	1281	
		CH-3 (SIKORSKY)	1282	
		CH-46 (SEA KNIGHT)	1283	
		CH-47 CHINOOK	1284	
		CH-53 SEA STALLION	1285	
		CH-54 LARKE (SKYCRANE)	1286	
		EH-60 QUICK FOX	1287	
		HH-1 IROQUOIS	1288	
		HH-2 SEA SPRITE	1289	
		HH-3 JOLLY GREEN	1290	
		HH-52 (SIKORSKY)	1291	
		HH-53 (SIKORSKY)	1292	
		OH-6 (HUGHES)	1293	
		OH-58 KIOWA	1294	
		RH-3 SEA KING	1295	
		RH-53 (SIKORSKY)	1296	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		SH-2 SEA SPRITE	1297	
		SH-3 SEA KING	1298	
		SH-60 SEA HAWK	1299	
		UH-1 IROQUOIS	1300	
		UH-2 SEA SPRITE	1301	
		UH-12 (HILLER)	1302	
		UH-46 (BOEING)	1303	
		UH-60 BLACK HAWK	1304	
		CH-2U	1305	
		HH-43	1306	
		A109 (AGUSTA)	1307	
		A129 MONGOOSE	1308	
		BO-105 (MBB)	1309	
		DISUSED	1310	
		CH-124 SEA KING	1311	
		DISUSED	1312	THROUGH 1314
		SA 315 LAMA	1315	
		DISUSED	1316	
		DISUSED	1317	
		SA 321 SUPER FRELON	1318	
		SA 330 PUMA	1319	
		SA 332 SUPER PUMA	1320	
		S 342 GAZELLE	1321	
		SA 350 ASTAR	1322	
		SA 360 DAUPHIN	1323	
		SA 361 DAUPHIN	1324	
		WG-13 LYNX	1325	
		WG-34 (WESTLAND)	1326	
		KA-18 HOG	1327	
		KA-20 HARP	1328	
		KA-25 HORMONE	1329	
		KA-26 HOODLUM	1330	
		MI-1 HARE	1331	
		MI-2 HOPLITE	1332	
		MI-4 HOUND	1333	
		MI-6 HOOK	1334	
		MI-8 HIP	1335	
		MI-10 HARKE	1336	
		MI-12 HOMER	1337	
		MI-14 HAZE	1338	
		MI-24 HIND	1339	
		MI-26 HALO	1340	
		CH-53E SUPER STALLION	1341	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		MH-53E SEA DRAGON	1342	
		HH-60 NIGHT HAWK	1343	
		HH-65A DOLPHIN	1344	
		KA-27 HELIX-A (ASW)	1345	
		KA-32 HELIX	1346	
		MI-17 HIP-H	1347	
		MI-28 HAVOC	1348	
		ECUREUIL/FENNEL/ESQILO	1349	
		KA-29 HELIX-B	1350	
		KA-50 HOKUM	1351	
		204 BELL	1352	
		205 BELL	1353	
		206 BELL	1354	
		214 BELL	1355	
		280 ENSTROM	1356	
		300 SCHWEIZER	1357	
		406 COMBAT SCOUT	1358	
		A 109 HIRUNDO	1359	
		A 129 MANGUSTA	1360	
		AH 6 CAYUSE	1361	
		ALOUETTE 2	1362	
		ALOUETTE 3	1363	
		AS 350 ECUREUIL	1364	
		AS 532 COUGAR	1365	
		AS 550 FENNEC	1366	
		AS 555 FENNEC	1367	
		AS 565 PANTHER	1368	
		CH 34 WESTLAND	1369	
		EH 101	1370	
		HAS 1 WASP	1371	
		KA-28 HELIX A	1372	
		MD 500 DEFENDER	1373	
		MI 22	1374	
		MI 25	1375	
		MI 35	1376	
		MI 9	1377	
		SA 341 GAZELLE	1378	
		SA 342 GAZELLE	1379	
		SA 365 DAUPHIN 2	1380	
		TS11 ISKRA	1381	
		WESSEX	1382	
		Z9 (HARBIN)	1383	
		CH-146 GRIFFON	1384	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		SEA KING AEW (SKW)	1385	
		EH 101 MERLIN	1386	
		AB-212 AUGUSTA BELL	1387	
		BO-105 BOLKOW	1388	
		CH-47 CHINOOK	1389	
		HUGHES 500	1390	
		HUGHES 3000	1391	
		SH-3D SIKORSKY	1392	
		SH-70L SIKORSKY	1393	
		CH-113 LABRADOR	1394	
		NH 90 (C2)	1395	
		NH 90 (RECCE)	1396	
		NH 90 (EW/SEAD)	1397	
		NH 90 (TRANSPORT)	1398	
		SEA LYNX MK88A	1399	
		SEA KING MK41 (KWS)	1400	
		TIGER (HAP)	1401	
		NH 90 (NAVY)	1402	
		TIGER (HAC)	1403	
		SA 341 GAZELLE CANON	1404	
		AS 532 COUGAR HORIZON	1405	
		AW-520 SAR CORMORANT	1406	
		UNDEFINED	1407 THROUGH 1534	
		HELICOPTER GENERAL	1535	

		AIR-AIR MISSILES		

		AIM-4A FALCON	1536	
		AIM-7 SPARROW	1537	
		AIM-9 SIDEWINDER	1538	
		AIM-54 PHOENIX	1539	
		AIM-2A GENIE	1540	
		AIM-120 AMRAAM	1541	
		ASLAM	1542	
		R.530	1543	
		R.550 MAGIC	1544	
		S.530 SUPER 530	1545	
		ASPIDE	1546	
		DISUSED	1547	
		SHAFRIR	1548	
		SKY FLASH	1549	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		DISUSED	1550	
		AA-2 ATOLL	1551	
		AA-3 ANAB	1552	
		AA-5 ASH	1553	
		AA-6 ACRID	1554	
		AA-7 APEX	1555	
		AA-8 APHID	1556	
		AAM	1557	
		AA-9 AMOS	1558	
		AA-XP-1/2	1559	
		AQM-34	1560	
		AQM-91	1561	
		BGM-34 FIREBEE/MQM34	1562	
		YQM-94	1563	
		YQM-98	1564	
		AIM-132 ASRAAM	1565	
		MICA	1566	
		PL-2A	1567	
		PL-5B	1568	
		PL-7	1569	
		PL-9	1570	
		PYTHON 3	1571	
		PYTHON 4	1572	
		AA-10 ALAMO	1573	
		AA-11 ARCHER	1574	
		AA-12 ADDER	1575	
		AA-1 ALKALI	1576	
		AAM-1	1577	
		UNDEFINED	1578 THROUGH 1790	
		AIR-TO-AIR MISSILE	1791	
		GENERAL		

		AIR-GROUND/GROUND-		
		GROUND MISSILES		

		AGM-45 SHRIKE	1792	
		AGM-65 MAVERICK	1793	
		AGM-69 SRAM	1794	
		AGM-78 STANDARD ARM	1795	
		AGM-84 HARPOON	1796	
		AGM-86 ALCM	1797	

FIELD CODING FOR J14.0C5

(SHEET 26)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		AGM-88 HARM	1798	
		AGM-109 TOMAHAWK	1799	
		AM 39 EXOCET	1800	
		AGM-119 PENGUIN	1801	
		AS 11 KILTER	1802	
		AS 12 KEGLER	1803	
		AS 15 KENT	1804	
		AS 30	1805	
		DISUSED	1806	
		RB 05	1807	
		RB 08	1808	
		ADVANCED ASM	1809	
		AS-1 KENNEL	1810	
		AS-2 KIPPER	1811	
		AS-3 KANGAROO	1812	
		AS-4 KITCHEN	1813	
		AS-5 KELT	1814	
		AS-6 KINGFISH	1815	
		AS-7 KERRY	1816	
		DISUSED	1817	
		AS-10 KAREN	1818	
		AS-9 KYLE	1819	
		AS 34 KORMORAN	1820	
		ASM GABRIEL	1821	
		ASM SEA SKUA	1822	
		ASM SEA EAGLE	1823	
		ASMP	1824	
		AT-2 SWATTER	1825	
		AT-3 SAGGER	1826	
		AT-6 SPIRAL	1827	
		C-601	1828	
		C-611	1829	
		C-801	1830	
		C-802	1831	
		CSS-2	1832	
		CSS-3	1833	
		CSS-N-3	1834	
		CSS-X-4	1835	
		FL-2 SILKWORM	1836	
		FL-7	1837	
		HY-2	1838	
		HY-3	1839	
		M-9/11	1840	

FIELD CODING FOR J14.0C5

(SHEET 27)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		WS-1	1841	
		AS-13 KINGBOLT	1842	
		AS-14 KEDGE	1843	
		AS-16 KICKBACK	1844	
		AS-17 KRYPTON	1845	
		AS-18 KAZOO	1846	
		AT-4 SPIGOT	1847	
		AT-5 SPANDREL	1848	
		AT-7 SAXHORN	1849	
		AT-10 STABBER	1850	
		AT-11 SNIPER	1851	
		AT-12	1852	
		AT-13	1853	
		AT-14	1854	
		FROG-7	1855	
		SS-1 SCUD	1856	
		SS-11 SEGO	1857	
		SS-13 SAVAGE	1858	
		SS-18 SATAN	1859	
		SS-19 STILETTO	1860	
		SS-24 SCALPEL	1861	
		SS-25 SICKLE	1862	
		SS-N-2 STYX	1863	
		SS-N-3 SHADDOCK	1864	
		SS-N-6 SERB	1865	
		SS-N-7 STARBRIGHT	1866	
		SS-N-8 SAWFLY	1867	
		SS-N-9 SIREN	1868	
		SS-N-12 SANDBOX	1869	
		SS-N-18 STINGRAY	1870	
		SS-N-19 SHIPWRECK	1871	
		SS-N-20 STURGEON	1872	
		SS-N-21 SAMPSON	1873	
		SS-N-22 SUNBURN	1874	
		SS-N-23 SKIFF	1875	
		SS-N-26	1876	
		AGNI	1877	
		PRITHVI	1878	
		TOW	1879	
		AGM-114 HELLFIRE	1880	
		MLRS	1881	
		HOT	1882	
		MILAN	1883	

FIELD CODING FOR J14.0C5

(SHEET 28)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		TRIGAT	1884	
		OTOMAT	1885	
		RBS-15M	1886	
		ARMAT	1887	
		ALARM	1888	
		AGM-12 BULLPUP	1889	
		AGM-62A WALLEYE	1890	
		AGM-123A SKIPPER II	1891	
		APACHE (ASM)	1892	
		AS 8	1893	
		AT-1 SWATTER	1894	
		CAS1	1895	
		KH-41 MOSKIT	1896	
		MARTIN PESCADOR	1897	
		MAS1 CARCARA	1898	
		RB 04E	1899	
		STAR	1900	
		SEA INDIGO	1901	
		MM 38	1902	
		MM 40	1903	
		SM 39	1904	
		AS 34 KORMORAN II	1905	
		UNDEFINED	1906 THROUGH 2046	
		AIR-GROUND MISSILE	2047	
		GENERAL		

		SURFACE TO AIR MISSILES		

		FIM-92 STINGER	2048	
		NIM-23 HAWK	2049	
		MIM-42 REDEYE	2050	
		MIM-72 CHAPARRAL	2051	
		MIM-104 PATRIOT	2052	
		RIM-2 TERRIER	2053	
		RIM-7 SEA SPARROW	2054	
		RIM-8 TALOS	2055	
		RIM-24 TARTAR	2056	
		RIM-66 STANDARD MISSILE	2057	
		RIM-67 STANDARD MISSILE	2058	
		BLOWPIPE	2059	
		DISUSED	2060 THROUGH 2061	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		SEA DART	2062	
		DISUSED	2063	
		SEA WOLF	2064	
		S 440 CROTALE EDIR	2065	
		RAPIER	2066	
		RBS-70 (SLM)	2067	
		DISUSED	2068	
		SAM ROLAND	2069	
		SA-2 GUIDELINE	2070	
		SA-3 GOA	2071	
		SA-4 GANEF	2072	
		SA-N-3 GOBLET	2073	
		SA-5 GAMMON	2074	
		SA-N-4 GECKO	2075	
		SA-6 GAINFUL	2076	
		SA-N-6 GRUMBLE	2077	
		SA-7 GRAIL	2078	
		SA-8 GECKO	2079	
		SA-9 GASKIN	2080	
		SA-10 GRUMBLE	2081	
		SA-11 GADFLY	2082	
		SA-12	2083	
		SA-13 GOPHER	2084	
		MISTRAL	2085	
		SA-N-7 GADFLY	2086	
		SA-N-8 GREMLIN	2087	
		SA-14 GREMLIN	2088	
		SA-16 GIMLET	2089	
		SA-X-17	2090	
		SA-N-5 GRAIL	2091	
		SA-N-11 GRISOM	2092	
		SA-12A GLADIATOR	2093	
		SA-12B GIANT	2094	
		SA-14 GREMLIN	2095	
		SA-15 GAUNTLET	2096	
		SA-17 GRIZZLY	2097	
		SA-N-12 GRIZZLY	2098	
		SA-18 GROUSE	2099	
		SA-19 GRISOM	2100	
		RIM-116 RAM	2101	
		ADATS	2102	
		JAVELIN	2103	
		STARBURST	2104	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		STARSTREAK	2105	
		ASPID	2106	
		I-HAWK	2107	
		ROLAND II	2108	
		SM-2 BLOCK II	2109	
		SM-2 BLOCK III	2110	
		SM-2 BLOCK IIIA	2111	
		SM-2 BLOCK IIIB	2112	
		SM-2 BLOCK IV	2113	
		SM-2 BLOCK IVA	2114	
		SM-3 LEAP	2115	
		AKASH	2116	
		ANZA	2117	
		ANZA II	2118	
		CSA-1	2119	
		CSA-2	2120	
		CSA-4	2121	
		CSA-5	2122	
		FM-80	2123	
		HN-5	2124	
		NK-7	2125	
		NK-16	2126	
		PANTZYR	2127	
		RAPIER 2000/JERNAS	2128	
		RBS-90	2129	
		SAKR	2130	
		SAVA	2131	
		SHANINE	2132	
		SKYGUARD ASPID	2133	
		SPADA	2134	
		TAM SAM	2135	
		TIGERCAT	2136	
		VANGUARD	2137	
		SA-N-1 GOA	2138	
		SA-N-9 GAUNTLET	2139	
		SA-N-10	2140	
		ALBATROS/ASPID	2141	
		SM-1	2142	
		VT1 CROTALE	2143	
		MASURCA	2144	
		ASTER 15	2145	
		ASTER 30	2146	
		UNDEFINED	2147 THROUGH 4093	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE -----	(CONTINUED)	
		RESET TO NO STATEMENT	4094	
		SURFACE-TO-AIR MISSILE GENERAL	4095	
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----		THE SPECIFIC TYPE OF POINT OR TRACK WITH AN ENVIRONMENT/CATEGORY OF SURFACE (MARITIME).
		NO STATEMENT	0	
		CV GENERAL	1	
		CLEMENCEAU	2	
		ENTERPRISE	3	
		FORRESTAL	4	
		JOHN F KENNEDY	5	
		KITTY HAWK	6	
		MIDWAY	7	
		NIMITZ	8	
		CHARLES DE GAULLE	9	
		UNDEFINED	10 THROUGH 21	
		CVS GENERAL	22	
		DEDALO	23	
		MINAS GERAIS	24	
		VIKRANT	25	
		VEINTICINCO DE MAYO	26	
		VIRAAT	27	
		UNDEFINED	28 THROUGH 35	
		CVH GENERAL	36	
		GIUSEPPE GARIBALDI	37	
		INVINCIBLE	38	
		JEANNE D'ARC	39	
		KIEV	40	
		PRINCIPE DE ASTURIAS	41	
		UNDEFINED	42	
		KIEV (MODIFIED)	43	
		UNDEFINED	44 THROUGH 52	
		BB GENERAL	53	
		IOWA	54	
		UNDEFINED	55 THROUGH 64	
		CC GENERAL	65	
		SVERDLOV (MODIFIED)	66	
		UNDEFINED	67 THROUGH 76	
		CG GENERAL	77	
		ANDREA DORIA	78	
		BAINBRIDGE	79	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		BELKNAP	80	
		CALIFORNIA	81	
		UNDEFINED	82	
		KARA	83	
		KIROV	84	
		KRESTA I	85	
		KRESTA II	86	
		KYNDA	87	
		LEAHY	88	
		LONG BEACH	89	
		SLAVA	90	
		TICONDEROGA	91	
		TRUXTUN	92	
		VIRGINIA	93	
		VITTORIO VENETO	94	
		UNDEFINED	95 THROUGH 118	
		CH GENERAL	119	
		MOSKVA	120	
		UNDEFINED	121 THROUGH 130	
		CA GENERAL	131	
		UNDEFINED	132	
		SVERDLOV	133	
		UNDEFINED	134 THROUGH 143	
		DD GENERAL	144	
		AKIZUKI	145	
		ALLEN M SUMNER	146	
		ALLEN M SUMNER FRAM II	147	
		ALMIRANTE	148	
		AMATSUKAZE	149	
		ANIMOSO	150	
		ANSHAN	151	
		ARLEIGH BURKE	152	
		ASAGARI	153	
		UNDEFINED	154	
		AUDACE	155	
		AYANAMI	156	
		DISUSED	157	
		CARPENTER FRAM I	158	
		CHARLES F ADAMS (MOD)	159	
		CHARLES F ADAMS	160	
		COONTZ	161	
		DISUSED	162 THROUGH 163	

FIELD CODING FOR J14.0C5

(SHEET 33)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		UNDEFINED	164	
		FLETCHER	165	
		FORREST SHERMAN (MOD) & HULL	166	
		FRIESLAND	167	
		GEARING FRAM I	168	
		GEARING FRAM II	169	
		UNDEFINED	170	
		DISUSED	171	
		HARUNA	172	
		HATAKAZE	173	
		HATSUYUKI	174	
		IMPAVIDO	175	
		KANIN	176	
		KASHIN (MODIFIED)	177	
		KASHIN	178	
		KASHIN II	179	
		KIDD	180	
		UNDEFINED	181	
		KILDIN (MODIFIED)	182	
		KOTLIN	183	
		KOTLIN (MODIFIED)	184	
		LUDA (TYPE 051)	185	
		MEKO 360	186	
		MINEGUMO	187	
		PROJECT 15	188	
		ROBERT H SMITH	189	
		ROGER D LAURIA	190	
		SAM KOTLIN	191	
		SHIRANE	192	
		SKORY	193	
		SOVREMENYY	194	
		SPRUANCE	195	
		SUFFREN	196	
		TACHIKAZE	197	
		TAKATSUKI	198	
		TYPE 42	199	
		DISUSED	200	
		DISUSED	201	
		TYPE F-70 (AAW)	202	
		TYPE F-70 (ASW)	203	
		TYPE F-67	204	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		UNDEFINED	205 THROUGH 206	
		TYPE T-53 (MODIFIED-ASW)	207	
		UNDEFINED	208	
		UDALOY	209	
		YAMAGUMO	210	
		Z	211	
		IROQUOIS	212	
		UNDEFINED	213 THROUGH 276	
		DE GENERAL	277	
		UNDEFINED	278	
		CASTLE	279	
		UNDEFINED	280 THROUGH 295	
		FF GENERAL	296	
		ALMIRANTE CLEMENTE	297	
		ALMIRANTE PEREIRA DA SILVA	298	
		ALPINO	299	
		DISUSED	300 THROUGH 301	
		BALEARES	302	
		BAPTISTA DE ANDRADE	303	
		UNDEFINED	304	
		BERK	305	
		BLACK SWAN	306	
		BROADSWORD (TYPE 22)	307	
		BRONSTEIN	308	
		BROOKE	309	
		CANNON	310	
		CHARLES LAWRENCE	311	
		CHENGDU	312	
		CHIKUGO	313	
		COMANDANTE JOAO BELO	314	
		UNDEFINED	315	
		CROSLEY	316	
		DEALEY	317	
		DESCUBIERTA	318	
		DUKE (TYPE 23)	319	
		DURANGO	320	
		EDSALL	321	
		GARCIA	322	
		GLOVER	323	
		GODAVARI	324	
		GRISHA I	325	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		GRISHA II	326	
		GRISHA III	327	
		UNDEFINED	328	
		GRISHA V	329	
		UNDEFINED	330	
		HVIDBJORNEN	331	
		ISHKARI	332	
		ISUZU	333	
		JACOB VAN HEEMSKERCK	334	
		JIANGDONG (TYPE 053J)	335	
		JIANGHU (TYPE 053H)	336	
		JIANGNAN	337	
		JOAO COUTINHO	338	
		KAREL DOORMAN	339	
		KNOX	340	
		DISUSED	341	
		KONI	342	
		KORTENAER	343	
		KRIVAK I	344	
		KRIVAK II	345	
		KRIVAK III	346	
		LA FAYETTE	347	
		DISUSED	348	
		LEOPARD	349	
		LUPU	350	
		M	351	
		DISUSED	352	
		MAESTRALE	353	
		MEKO 140 TYPE	354	
		MEKO 200 TYPE	355	
		MIRKA I	356	
		MIRKA II	357	
		NIELS JUEL	358	
		NITEROI	359	
		OLIVER HAZARD PERRY	360	
		OSLO	361	
		PEDER SKRAM	362	
		PETYA I (MODIFIED)	363	
		PETYA I	364	
		PETYA II (MODIFIED)	365	
		PETYA II	366	
		PETYA III	367	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		UNDEFINED	368	
		DISUSED	369	
		RIGA	370	
		RIVER	371	
		BRANDENBURG (TYPE 123)	372	
		RUDDEROW	373	
		SACHSEN (TYPE 124)	374	
		SAVAGE	375	
		DISUSED	376	
		TROMP	377	
		TYPE A 69	378	
		TYPE F-2000S	379	
		UNDEFINED	380 THROUGH 381	
		YUBARI	382	
		BREMEN (TYPE 122)	383	
		CLAUDE JONES	384	
		FFG 7	385	
		HALIFAX	386	
		NAJIN	387	
		PRESIDENT	388	
		SANTA MARIA	389	
		VOSPER MK 5	390	
		VOSPERTHORNYCROFT MK 7	391	
		WIELINGEN	392	
		FLOREAL	393	
		COMMANDANT BORY	394	
		UNDEFINED	395 THROUGH 478	
		FS GENERAL	479	
		ALBATROS	480	
		AUK CLASS	481	
		DE CRISTOFARO	482	
		DISUSED	483	
		MINERVA	484	
		NANUCHKA I	485	
		NANUCHKA II	486	
		NANUCHKA III	487	
		DISUSED	488	
		PF-103	489	
		SAAR 5	490	
		SLEIPNER	491	
		TARANTUL I	492	
		TARANTUL II	493	

FIELD CODING FOR J14.0C5

(SHEET 37)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		DISUSED	494	
		WADI	495	
		UNDEFINED	496 THROUGH 517	
		LL GENERAL	518	
		UNDEFINED	519 THROUGH 528	
		LCC GENERAL	529	
		BLUE RIDGE	530	
		CAVEZZALE	531	
		UNDEFINED	532 THROUGH 540	
		LKA GENERAL	541	
		CHARLESTON	542	
		UNDEFINED	543 THROUGH 552	
		LFS GENERAL	553	
		UNDEFINED	554 THROUGH 563	
		LHA GENERAL	564	
		TARAWA	565	
		UNDEFINED	566 THROUGH 575	
		LHD GENERAL	576	
		WASP	577	
		UNDEFINED	578 THROUGH 587	
		LPA GENERAL	588	
		UNDEFINED	589 THROUGH 598	
		LPD GENERAL	599	
		AUSTIN	600	
		FEARLESS	601	
		IVAN ROGOV	602	
		UNDEFINED	603	
		RALEIGH	604	
		SAN GIORGIO	605	
		UNDEFINED	606 THROUGH 615	
		LPH GENERAL	616	
		IWO JIMA	617	
		UNDEFINED	618 THROUGH 627	
		LSD GENERAL	628	
		ANCHORAGE	629	
		ASHLAND	630	
		CABILDO	631	
		OURAGAN	632	
		FOUDRE	633	
		THOMASTON	634	
		WHIDBEY ISLAND	635	
		UNDEFINED	636 THROUGH 646	

FIELD CODING FOR J14.0C5

(SHEET 38)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		LSL GENERAL	647	
		SIR GERAINT	648	
		UNDEFINED	649 THROUGH 657	
		LSM GENERAL	658	
		ASHDOD	659	
		BATRAL	660	
		CAKABEY	661	
		EDIC I	662	
		EDIC II	663	
		LSM-1	664	
		MP-4	665	
		POLNOCHNY	666	
		POLOCHNY A	667	
		POLOCHNY B	668	
		POLOCHNY C	669	
		POLOCHNY D	670	
		YUDAO	671	
		YULIMG	672	
		BOUGAINVILLE	673	
		UNDEFINED	674 THROUGH 687	
		LST GENERAL	688	
		ALLIGATOR	689	
		ATSUMI	690	
		UNDEFINED	691	
		BROOKE MARINE 93M	692	
		CAKABEY NL-122	693	
		CNIM PS 700	694	
		DE SOTO COUNTY	695	
		DISUSED	696	
		HENGAM	697	
		LST 1-510	698	
		LST 511-1152	699	
		MIURA	700	
		NEWPORT	701	
		ROPUCHA	702	
		SARUCABEY	703	
		CNGF	704	
		OCEAN	705	
		ALBION	706	
		TERREBONNE PARISH	707	
		TOBRUK	708	
		UNDEFINED	709	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		YUKAN	710	
		UNDEFINED	711 THROUGH 730	
		LSV GENERAL	731	
		UNDEFINED	732 THROUGH 741	
		LC GENERAL	742	
		UNDEFINED	743 THROUGH 751	
		LCM GENERAL	752	
		CTM 1	753	
		HUNGNAM	754	
		LCM 1057/1058	755	
		LCM 6	756	
		LCM 8	757	
		T-4	758	
		TSAPLYA	759	
		LCM (TYPE 521)	760	
		UNDEFINED	761 THROUGH 772	
		LCP GENERAL	773	
		DISUSED	774	
		LCM 1031	775	
		LCM 1035/1036	776	
		LCM 1055/1056	777	
		NAMPO	778	
		UNDEFINED	779 THROUGH 788	
		LCPL GENERAL	789	
		UNDEFINED	790 THROUGH 799	
		LWC GENERAL	800	
		UNDEFINED	801 THROUGH 810	
		LCU GENERAL	811	
		BALIKPAPAN	812	
		BOMBARDA	813	
		BRAILA	814	
		LCU (TYPE 520)	815	
		DISUSED	816	
		DISUSED	817	
		DISUSED	818	
		DSM-501	819	
		HANCHON	820	
		HANTAE	821	
		KISHON	822	
		KVALSUND	823	
		LCT MK 5	824	
		LCT MK 6	825	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		LCU 501	826	
		MFP D-3	827	
		MZ	828	
		REINOYSUND	829	
		SMB-1	830	
		TU 57-M	831	
		US LCU 1466	832	
		VYDRA	833	
		YURA	834	
		UNDEFINED	835 THROUGH 866	
		LCVP GENERAL	867	
		UNDEFINED	868 THROUGH 877	
		LCAC GENERAL	878	
		AIST	879	
		GUS	880	
		LEBED	881	
		UTENOK	882	
		WELLINGTON BH-7 MK 4	883	
		WELLINGTON BH-7 MK 5	884	
		WINCHESTER (SR.N6)	885	
		UNDEFINED	886 THROUGH 896	
		MM GENERAL	897	
		ALESHA	898	
		ALVSBORG	899	
		BORGEN	900	
		CARLSKRONA	901	
		COSAR	902	
		FALSTER	903	
		FURUSUND (MUL-20)	904	
		LANGELAND	905	
		LINDORMEN	906	
		LSM-1 (MODIFIED)	907	
		MUL-11	908	
		MUL-12	909	
		DISUSED	910	
		SMITH	911	
		US YMP	912	
		VIDAR	913	
		UNDEFINED	914 THROUGH 935	
		MCS GENERAL	936	
		UNDEFINED	937 THROUGH 946	
		MCJ GENERAL	947	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		UNDEFINED	948 THROUGH 957	
		MCD GENERAL	958	
		KINGSTON	959	
		MUEHLHAUSEN MCD (TYPE 742A)	960	
		UNDEFINED	961 THROUGH 968	
		MCM GENERAL	969	
		UNDEFINED	970 THROUGH 979	
		MH GENERAL	980	
		UNDEFINED	981 THROUGH 990	
		MHO GENERAL	991	
		UNDEFINED	992 THROUGH 1001	
		MHC GENERAL	1002	
		ADJUTANT (MODIFIED)	1003	
		AGGRESSIVE	1004	
		CIRCE	1005	
		WEIDEN MHC (TYPE 332)	1006	
		KOBLENZ MHC (TYPE 331B)	1007	
		HAM	1008	
		HUNT	1009	
		LANDSORT	1010	
		LERICI	1011	
		MSC 50	1012	
		MSO 218	1013	
		MSO 503	1014	
		SAUDA	1015	
		SIRIUS	1016	
		DISUSED	1017	
		TRIPARTITE	1018	
		VANYA I	1019	
		SANDOWN (SRMH)	1020	
		UNDEFINED	1021 THROUGH 1029	
		MHSC GENERAL	1030	
		MARS	1031	
		UNDEFINED	1032 THROUGH 1043	
		MHI GENERAL	1044	
		BAY	1045	
		UNDEFINED	1046 THROUGH 1054	
		MHA GENERAL	1055	
		UNDEFINED	1056 THROUGH 1065	
		ML GENERAL	1066	
		UNDEFINED	1067 THROUGH 1076	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		MLC GENERAL	1077	
		CURLEW	1078	
		UNDEFINED	1079 THROUGH 1088	
		MLI GENERAL	1089	
		UNDEFINED	1090 THROUGH 1099	
		MLO GENERAL	1100	
		UNDEFINED	1101 THROUGH 1110	
		MLR GENERAL	1111	
		UNDEFINED	1112 THROUGH 1121	
		MLA GENERAL	1122	
		UNDEFINED	1123 THROUGH 1132	
		MLS GENERAL	1133	
		UNDEFINED	1134 THROUGH 1143	
		MS GENERAL	1144	
		UNDEFINED	1145 THROUGH 1154	
		MSF GENERAL	1155	
		EX-ERIMO	1156	
		K-8	1157	
		KROGULEC	1158	
		M-40	1159	
		MSO-421	1160	
		NATYA I	1161	
		NATYA II	1162	
		RIVER	1163	
		T-43	1164	
		YURKA	1165	
		UNDEFINED	1166 THROUGH 1180	
		MSO GENERAL	1181	
		ACME	1182	
		AGGRESSIVE	1183	
		UNDEFINED	1184 THROUGH 1193	
		MSC GENERAL	1194	
		136 FT	1195	
		ADJUTANT	1196	
		ARKOE	1197	
		BAY	1198	
		DOKKUM	1199	
		HATSUSHIMA	1200	
		HAYASE	1201	
		DISUSED	1202	
		KOUZJ	1203	
		LENIWKA	1204	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		HAMELN MSC (TYPE 343)	1205	
		MSC 268	1206	
		MSC 292	1207	
		MSC 294	1208	
		NOTEC	1209	
		SASHA	1210	
		SAUDA	1211	
		DISUSED	1212	
		DISUSED	1213	
		SONYA	1214	
		T-301	1215	
		T-43	1216	
		TAKAMI	1217	
		DISUSED	1218	
		VANYA	1219	
		VANYA I	1220	
		VANYA II	1221	
		WUSONG	1222	
		ZHENYA	1223	
		UNDEFINED	1224 THROUGH 1263	
		MSI GENERAL	1264	
		DISUSED	1265	
		AUX MINESWEEPER NO 1	1266	
		CAPE	1267	
		FRAUENLOB (TYPE 394)	1268	
		HAM	1269	
		HERSTAL	1270	
		KIISKI	1271	
		KUHA	1272	
		M-111	1273	
		M-15	1274	
		M-31	1275	
		M-43/47	1276	
		PIPA-A	1277	
		WOCHANG	1278	
		YEVGENYA	1279	
		YUKTO	1280	
		UNDEFINED	1281 THROUGH 1302	
		MSR GENERAL	1303	
		UNDEFINED	1304 THROUGH 1313	
		MSB GENERAL	1314	
		K-8	1315	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		N-300	1316	
		NESTIN	1317	
		NØ. 7	1318	
		OLYA	1319	
		PO-2	1320	
		TR-40	1321	
		VD-141	1322	
		VULCAIN	1323	
		STYX	1324	
		PLUTON	1325	
		ACHERON	1326	
		UNDEFINED	1327 THROUGH 1334	
		MSA GENERAL	1335	
		UNDEFINED	1336 THROUGH 1345	
		MSD GENERAL	1346	
		HFG-1 (TROIKA)	1347	
		ILYUSHA	1348	
		UNDEFINED	1349 THROUGH 1358	
		MCSD GENERAL	1359	
		UNDEFINED	1360 THROUGH 1369	
		MSS GENERAL	1370	
		ANDRYUSHA	1371	
		BALTIKA	1372	
		POLNOCNY	1373	
		UNDEFINED	1374 THROUGH 1383	
		MSH GENERAL	1384	
		UNDEFINED	1385 THROUGH 1394	
		MSO GENERAL	1395	
		BERLAIMONT (MODIFIED)	1396	
		UNDEFINED	1397 THROUGH 1405	
		MSHC GENERAL	1406	
		HUNT	1407	
		TRIPARTITE	1408	
		WILTON	1409	
		UNDEFINED	1410 THROUGH 1419	
		PP GENERAL	1420	
		AB 25	1421	
		UNDEFINED	1422	
		BALDER	1423	
		CASTLE	1424	
		ISLAND	1425	
		KRONSHTADT	1426	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		PC-1638	1427	
		UNDEFINED	1428	THROUGH 1438
		PG GENERAL	1439	
		BESKYTTEVREN	1440	
		BIHORO	1441	
		ERIMO	1442	
		DISUSED	1443	
		HVIDBJOERNEN	1444	
		IZU	1445	
		KOJIMA	1446	
		UNDEFINED	1447	
		NOJIMA	1448	
		PAUK	1449	
		PEACOCK	1450	
		POTI	1451	
		SAVAGE	1452	
		SHIRETOKO	1453	
		SOYA	1454	
		TACOMA	1455	
		LEOPARD (TYPE 148)	1456	
		BAMBU	1457	
		CASSIOPEA	1458	
		UNDEFINED	1459	THROUGH 1480
		PGS GENERAL	1481	
		UNDEFINED	1482	THROUGH 1491
		PGB GENERAL	1492	
		UNDEFINED	1493	THROUGH 1502
		PGF GENERAL	1503	
		ALBATROS (TYPE 143)	1504	
		ASHEVILLE	1505	
		BARNEGAT	1506	
		CHONGJU	1507	
		GEPARD (TYPE 143A)	1508	
		HOUKU	1509	
		IVANSUSANIN	1510	
		KAMAN	1511	
		KARTAL	1512	
		KOMAR	1513	
		LA COMBATTANTE II	1514	
		LA COMBATTANTE III	1515	
		LURSSSEN FPB 57 TYPE	1516	
		OKHTENSKIY	1517	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		OSA I	1518	
		OSA II	1519	
		P-4	1520	
		PURGA	1521	
		SAAR 2	1522	
		SAAR 3	1523	
		SAAR 4	1524	
		SAAR 5	1525	
		SARIWON	1526	
		SNOEGG	1527	
		SOHUNG	1528	
		SOJU	1529	
		SORUM	1530	
		STORM	1531	
		T	1532	
		T-43	1533	
		T-58	1534	
		VOSPER 100-FT	1535	
		VOSPER BRAVE	1536	
		WILLEMOES	1537	
		UNDEFINED	1538 THROUGH 1583	
		PC GENERAL	1584	
		ADMIRABLE	1585	
		AGDLEK	1586	
		AKIZUKI	1587	
		ATTACK	1588	
		BAY	1589	
		DISUSED	1590	
		BROOKE MARINE 108-FT	1591	
		CACINE	1592	
		CHONGJU	1593	
		DAPHNE	1594	
		GDANSK	1595	
		HAIKOU	1596	
		HAINAN	1597	
		HANOE	1598	
		K-48	1599	
		KRALJEVICA	1600	
		KRONSHADT	1601	
		LAKE	1602	
		MAGAEN	1603	
		MATSUNAMI	1604	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		MIZUTORI	1605	
		MURAKUMO	1606	
		OBLUZE	1607	
		PGM 71	1608	
		SDB MK II	1609	
		SDB MK III	1610	
		SEAFORTH	1611	
		SHANGHAI	1612	
		SHANGHAI II	1613	
		SHANGHAI II (MODIFIED)	1614	
		SHIKINAMI	1615	
		SO-1	1616	
		SOMAN	1617	
		STENKA	1618	
		T-58	1619	
		TAECHONG	1620	
		UK FORD	1621	
		UMIGIRI	1622	
		US 110-FT	1623	
		US 173-FT	1624	
		UNDEFINED	1625	
		ARCHER	1626	
		ATTACKER	1627	
		23M PC (MANLY)	1628	
		UNDEFINED	1629	THROUGH 1681
		PCF GENERAL	1682	
		BABOCHKA	1683	
		MURAVEY	1684	
		POTI	1685	
		SO-1 (MODIFIED)	1686	
		UNDEFINED	1687	THROUGH 1696
		PCE GENERAL	1697	
		UNDEFINED	1698	THROUGH 1707
		PB GENERAL	1708	
		AKAGI	1709	
		AKIZUKI	1710	
		ALBATROZ	1711	
		ATTACK P-90	1712	
		BARSO	1713	
		BAY	1714	
		BIZAN	1715	
		BROOKE MARINE 37.5M	1716	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		CHONGJIN	1717	
		DABUR	1718	
		DALARO	1719	
		DE L'ESTEREL	1720	
		DILOS	1721	
		DOM ALEIXO	1722	
		DISUSED	1723	
		FREMANTLE	1724	
		GOULANDRIS	1725	
		GUANABACOA	1726	
		HAMAGIRI	1727	
		HAMELIN 37M	1728	
		HIDAKA	1729	
		HUANGPU	1730	
		INTERCEPTOR MK II	1731	
		KIMJIN 67-FT	1732	
		MATSUNAMI	1733	
		MURAKUMO	1734	
		OIRASE	1735	
		P 400	1736	
		P-6	1737	
		PANAGOPOULOS	1738	
		PATRA	1739	
		PBR MK II	1740	
		PBR MK III	1741	
		PGM 71	1742	
		PO-2	1743	
		POLISH K-8	1744	
		POLUCHAT I	1745	
		SHANTOU	1746	
		SHIKINAMI	1747	
		SINHUNG 72-FT	1748	
		SKANOER	1749	
		SOYA/TSUGARU	1750	
		SPEAR	1751	
		STEWART 85-FT	1752	
		SWATOW	1753	
		SWIFT	1754	
		TAISHAN	1755	
		TESHIO	1756	
		TRACKER II	1757	
		US 110-FT	1758	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		US ARMY 2001 65-FT	1759	
		USCG 83-FT	1760	
		VEDETTE 28 92-FT	1761	
		VIKRAM	1762	
		VOSPER 70-FT	1763	
		YAMAYURI	1764	
		ZHUK	1765	
		SNOEGG	1766	
		MARS	1767	
		TRIDENT	1768	
		UNDEFINED	1769 THROUGH 1842	
		PBF GENERAL	1843	
		CHAO (CHODO)	1844	
		DE L'ESTEREL	1845	
		GIRNE	1846	
		HAUK	1847	
		HUGIN	1848	
		SLEPEN	1849	
		UNDEFINED	1850	
		SPICA II	1851	
		MARS	1852	
		UNDEFINED	1853 THROUGH 1863	
		PBS GENERAL	1864	
		UNDEFINED	1865 THROUGH 1874	
		PBR GENERAL	1875	
		LEIE	1876	
		PIYAVKA	1877	
		SHMEL	1878	
		VOSH	1879	
		YATUSH	1880	
		YAZ	1881	
		UNDEFINED	1882 THROUGH 1891	
		PT GENERAL	1892	
		AN JU	1893	
		EPITROP	1894	
		HIGGINS 78-FT	1895	
		HUCHUAN PTH-	1896	
		HUZHOU	1897	
		IWON	1898	
		DISUSED	1899	
		KU SONG	1900	
		NO. 11	1901	

FIELD CODING FOR J14.0C5

(SHEET 50)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		P-4	1902	
		P-6	1903	
		PILICA	1904	
		SHERSHEN	1905	
		SIN HUNG	1906	
		SIN NAM	1907	
		SINPO	1908	
		SOLOVEN	1909	
		SPICA	1910	
		TJELD	1911	
		WISLA	1912	
		DISUSED	1913	
		SHANGDONG	1914	
		TURYA	1915	
		UNDEFINED	1916 THROUGH 2047	
		PHM GENERAL	2048	
		MATKA	2049	
		PEGASUS	2050	
		SARANCHA	2051	
		SHIMRIT	2052	
		SPARVIERO	2053	
		UNDEFINED	2054 THROUGH 2063	
		BM GENERAL	2064	
		UNDEFINED	2065 THROUGH 2074	
		BMR GENERAL	2075	
		UNDEFINED	2076 THROUGH 2085	
		SWCL GENERAL	2086	
		UNDEFINED	2087 THROUGH 2096	
		AA GENERAL	2097	
		UNDEFINED	2098 THROUGH 2107	
		AG GENERAL	2108	
		ADOLF	2109	
		AKIZUKI	2110	
		ANGARA	2111	
		ARGO	2112	
		AYANAMI	2113	
		DISUSED	2114 THROUGH 2115	
		CHAMOIS	2116	
		CHIHAYA	2117	
		DALDYN	2118	
		DISUSED	2119	
		DINGHAI	2120	

FIELD CODING FOR J14.0C5

(SHEET 51)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		ENDURANCE	2121	
		EXPLORER	2122	
		DISUSED	2123	
		FRIPONNE	2124	
		GALEB	2125	
		UNDEFINED	2126	
		HAM	2127	
		DISUSED	2128	
		HAYABUSA	2129	
		DISUSED	2130	
		ISLES	2131	
		KEYLA	2132	
		KURIHAMA	2133	
		L' ARCHEONAUTE	2134	
		L' ATHOS	2135	
		UNDEFINED	2136	
		LENTRA	2137	
		LIANYUN	2138	
		LSIL	2139	
		MIZUTORI	2140	
		MP-2	2141	
		MP-8	2142	
		MURASAME	2143	
		NEFTEGAZ	2144	
		NØ. 81	2145	
		NORGE	2146	
		OHRE	2147	
		ONEGA	2148	
		DISUSED	2149	
		POSEIDON	2150	
		PS-10	2151	
		RARI	2152	
		RHIN	2153	
		SABAC	2154	
		SHAHSAVAR	2155	
		ST. LYKODIS	2156	
		STALWART	2157	
		T-43	2158	
		TAPATAI	2159	
		TAPPE	2160	
		THULE	2161	
		TOMBA	2162	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		TSUGARU	2163	
		UMITAKA	2164	
		US 184 FT. PCE	2165	
		US 72 FT. HMDL	2166	
		VANGUARD	2167	
		VIS	2168	
		VYTEGRALES	2169	
		WHISKEY	2170	
		WILHELM PULLWER (TYPE 741)	2171	
		PELIKAAN	2172	
		RANCE	2173	
		MERCURE	2174	
		STERNE	2175	
		ALBATROS	2176	
		PHENIX	2177	
		UNDEFINED	2178 THROUGH 2256	
		ARV GENERAL	2257	
		ARGUS	2258	
		ENGADINE	2259	
		RELIANT	2260	
		UNDEFINED	2261 THROUGH 2270	
		AVT GENERAL	2271	
		LEXINGTON	2272	
		UNDEFINED	2273 THROUGH 2282	
		AE GENERAL	2283	
		EVROS	2284	
		DISUSED	2285	
		KILAUEA	2286	
		NITRO	2287	
		REGENT	2288	
		SURIBACHI	2289	
		WESTERWALD (TYPE 760)	2290	
		UNDEFINED	2291 THROUGH 2301	
		AEL GENERAL	2302	
		UNDEFINED	2303 THROUGH 2312	
		AET GENERAL	2313	
		UNDEFINED	2314 THROUGH 2323	
		AETL GENERAL	2324	
		UNDEFINED	2325 THROUGH 2334	
		AGF GENERAL	2335	
		ABDIEL	2336	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		CORONADO	2337	
		GODETIA	2338	
		LA SALLE	2339	
		DISUSED	2340	
		ZINNIA	2341	
		ELBE (TYPE 404)	2342	
		UNDEFINED	2343	THROUGH 2351
		ACM GENERAL	2352	
		UNDEFINED	2353	THROUGH 2362
		APB GENERAL	2363	
		MICHELANGELO	2364	
		UNDEFINED	2365	THROUGH 2374
		ABU GENERAL	2375	
		CARDENAS	2376	
		FINIK I	2377	
		KARPF II	2378	
		SKB 64	2379	
		YANTAI	2380	
		YANNAN	2381	
		YANGUAN	2382	
		TIANEE	2383	
		LA PRUDENTE	2384	
		UNDEFINED	2385	THROUGH 2395
		ABUD GENERAL	2396	
		UNDEFINED	2397	THROUGH 2406
		ANL GENERAL	2407	
		UNDEFINED	2408	THROUGH 2417
		ARC GENERAL	2418	
		EMBA I	2419	
		EMBA II	2420	
		KALAR	2421	
		KLASMA	2422	
		MP-2	2423	
		NEPTUNE	2424	
		TELNOVSK (MODIFIED)	2425	
		YOUDIAN	2426	
		ZEUS	2427	
		UNDEFINED	2428	THROUGH 2440
		AK GENERAL	2441	
		2ND LT JOHN P BOBO	2442	
		ALCHIBA	2443	
		AMGUEMA	2444	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		ANDIZHAN	2445	
		ANDONG	2446	
		ANDROMEDA (CONVERTED)	2447	
		DISUSED	2448	
		BARRICADE	2449	
		BITTERBUSH	2450	
		C3-S-33A TYPE	2451	
		(CONVERTED)		
		C4-S-66A TYPE	2452	
		C4-S-69B TYPE	2453	
		C4-S-A3 TYPE	2454	
		C5-S-75A TYPE	2455	
		CHULYM	2456	
		CPL LOUIS J HAUGE JR	2457	
		DINGHAI	2458	
		DONBA SS	2459	
		FS DESIGN 330	2460	
		GALATI	2461	
		HONGQI	2462	
		ISLES	2463	
		KANARYA	2464	
		KOLOMNA	2465	
		LENINGRADSKY KOMSOMOLETS	2466	
		LSIL	2467	
		NEON ANTONOV	2468	
		NORWALK	2469	
		PT-61	2470	
		SGT MATEJ KOCAK	2471	
		THROSK	2472	
		TREE	2473	
		YANHANG	2474	
		YUNYY PARTIZAN	2475	
		UNDEFINED	2476 THROUGH 2521	
		AKL GENERAL	2522	
		ELTANIN	2523	
		KEYLA	2524	
		UNDEFINED	2525	
		LENTRA	2526	
		UNDEFINED	2527	
		MP 4	2528	
		MP 6	2529	
		MUNA	2530	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		SEKSTAN	2531	
		TELNOVSK	2532	
		WISTING	2533	
		GORGONA	2534	
		UNDEFINED	2535	THROUGH 2549
		AKR GENERAL	2550	
		ALGOL (SL 7)	2551	
		CALLAGHAN	2552	
		COMET	2553	
		METEOR	2554	
		DISUSED	2555	
		MAINE (CONVERTED)	2556	
		UNDEFINED	2557	THROUGH 2566
		AFS GENERAL	2567	
		FORT	2568	
		UNDEFINED	2569	
		MARS	2570	
		RESOURCE	2571	
		UNDEFINED	2572	THROUGH 2580
		AOE GENERAL	2581	
		SACRAMENTO	2582	
		SAGAMI	2583	
		UNDEFINED	2584	THROUGH 2593
		AD GENERAL	2594	
		YELLOWSTONE	2595	
		SAMUEL GOMPERS	2596	
		DIXIE	2597	
		STALWART	2598	
		UNDEFINED	2599	THROUGH 2608
		AWW GENERAL	2609	
		UNDEFINED	2610	THROUGH 2619
		AH GENERAL	2620	
		HAVEN	2621	
		OB	2622	
		DISUSED	2623	
		UNDEFINED	2624	THROUGH 2632
		AGB GENERAL	2633	
		DOBRYNYA NIKITICH	2634	
		HANSE	2635	
		IVANSUSANIN	2636	
		SHIRASE	2637	
		YANHA	2638	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		UNDEFINED	2639 THROUGH 2648	
		AGBL GENERAL	2649	
		EISVOGEL (TYPE 721)	2650	
		DISUSED	2651	
		UNDEFINED	2652 THROUGH 2661	
		AGI GENERAL	2662	
		ALPINIST	2663	
		ARMINZA	2664	
		UNDEFINED	2665	
		BALZAM	2666	
		BOLOGOE	2667	
		DISUSED	2668	
		HAM	2669	
		DISUSED	2670	
		DISUSED	2671	
		LENTA	2672	
		MAYAK	2673	
		MIRNY	2674	
		MOMA	2675	
		NIKOLAY ZUBOV	2676	
		OKEAN	2677	
		DISUSED	2678	
		PAMIR	2679	
		PRIMORYE	2680	
		ALSTER (TYPE 423)	2681	
		UNDEFINED	2682 THROUGH 2705	
		ALS GENERAL	2706	
		UNDEFINED	2707 THROUGH 2716	
		AEM GENERAL	2717	
		AMGA	2718	
		ANDIZHAN (MODIFIED)	2719	
		LAMA	2720	
		MALINA	2721	
		MELITOPOL	2722	
		MP 6	2723	
		UNDEFINED	2724 THROUGH 2733	
		AGM GENERAL	2734	
		AGM-24	2735	
		GEN HOYT S VANDENBERG	2736	
		OBSERVATION ISLAND	2737	
		RANGE SENTINEL	2738	
		(HASKELL TYPE)		

FIELD CODING FOR J14.0C5

(SHEET 57)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		REDSTONE	2739	
		UNDEFINED	2740 THROUGH 2749	
		AGOR GENERAL	2750	
		ABKHAZIYA	2751	
		AKADEMIK KRYLOV	2752	
		ARAD	2753	
		BALIKPAPAN	2754	
		BELGICA	2755	
		DISUSED	2756	
		COOK	2757	
		D'ENTRECASTEAUX	2758	
		DOBRYNYA NIKITICH	2759	
		DONG MING	2760	
		ELTANIN	2761	
		ENDEAVOR	2762	
		FRANCESCO NULLO	2763	
		DISUSED	2764	
		GRIGORE ANTIPA	2765	
		GYRE	2766	
		HAYES	2767	
		HECLA	2768	
		MELVILLE	2769	
		MSC 60	2770	
		NAUTILUS	2771	
		NEVELSKOY	2772	
		NIKOLAY ZUBOV	2773	
		PITHEAS	2774	
		POLYUS	2775	
		QUEST	2776	
		ROBERT D CONRAD	2777	
		T-43	2778	
		TRITON	2779	
		TUI	2780	
		TYDEMAN	2781	
		XIANG YANG HONG	2782	
		YANLUN	2783	
		YUG	2784	
		ZENOBE GRAMME	2785	
		MAYAK	2786	
		UNDEFINED	2787 THROUGH 2823	
		AGOB GENERAL	2824	
		POLARSTERN	2825	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		UNDEFINED	2826 THROUGH 2835	
		AGOS GENERAL	2836	
		UNDEFINED	2837 THROUGH 2845	
		AO GENERAL	2846	
		UNDEFINED	2847	
		AKAR	2848	
		ALBAY BURBAK	2849	
		ALTAY	2850	
		UNDEFINED	2851	
		BASKUNCHAK	2852	
		BAYLEAF	2853	
		BINBASI GURGAN	2854	
		DISUSED	2855	
		CIMARRON	2856	
		CIMARRON (JUMBOISED)	2857	
		DORA	2858	
		HAMANA	2859	
		DISUSED	2860	
		DISUSED	2861	
		HENRY J KAISER	2862	
		IRTYSH	2863	
		KALININGRADNEFT	2864	
		KHOBİ	2865	
		KONDA	2866	
		METTAWEE	2867	
		MISPILLION (JUMBOISED)	2868	
		MOSKIT	2869	
		NEOSHO	2870	
		NERCHA	2871	
		NORWEGIAN BOW	2872	
		OLEKMA	2873	
		PATAPSCO	2874	
		PEVEK	2875	
		UNDEFINED	2876	
		SOFIYA	2877	
		SPESSART (TYPE 704A)	2878	
		TASKIZAK	2879	
		USEDOM	2880	
		WALCHENSEE (TYPE 703)	2881	
		WAVE	2882	
		DISUSED	2883	
		YUZBASI TOLUNAY	2884	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		BRAMBLELEAF	2885	
		UNDEFINED	2886 THROUGH 2936	
		AOT GENERAL	2937	
		AMERICAN EXPLORER	2938	
		AOTL	2939	
		EBANOL	2940	
		FULIN	2941	
		FUZHOU	2942	
		GUANZGHOU	2943	
		LEIZHOU	2944	
		MAUMEE	2945	
		METTAWEE	2946	
		MISSION	2947	
		POTOMOC	2948	
		SEALIFT	2949	
		SUAMICO	2950	
		T 5 TYPE	2951	
		TM2	2952	
		PORT VENDRES	2953	
		UNDEFINED	2954 THROUGH 2973	
		AOTL GENERAL	2974	
		DISUSED	2975	
		KH0BI	2976	
		UNDEFINED	2977 THROUGH 2986	
		AOR GENERAL	2987	
		BANDAR ABBAS	2988	
		BEREZINA	2989	
		BORIS CHILIKIN	2990	
		CAPITAN OLA PANTOJA	2991	
		DEEPAK	2992	
		DUBNA	2993	
		DURANCE	2994	
		FUQING	2995	
		KAZBEK	2996	
		KHARG	2997	
		MEERSBURG (TYPE 701C)	2998	
		MESAR	2999	
		OLWEN	3000	
		POOLSTER	3001	
		POLYARNIK	3002	
		PROTECTEUR	3003	
		PROVIDER	3004	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		ROVER	3005	
		SAO GABRIEL	3006	
		STROMBOLI	3007	
		TIDE (IMPROVED)	3008	
		UDA	3009	
		WICHITA	3010	
		FORT VICTORIA	3011	
		BERLIN (TYPE 702C)	3012	
		UNDEFINED	3013	THROUGH 3042
		AORL GENERAL	3043	
		LEIZHOU	3044	
		UNDEFINED	3045	THROUGH 3054
		AOL GENERAL	3055	
		PUNARUU	3056	
		UNDEFINED	3057	THROUGH 3065
		AGP GENERAL	3066	
		GRAHAM COUNTY	3067	
		NORGE	3068	
		DISUSED	3069	
		MERCUUR	3070	
		UNDEFINED	3071	THROUGH 3079
		AP GENERAL	3080	
		MIKHAIL KALININ	3081	
		PANDORA	3082	
		QIONGSHA	3083	
		UNDEFINED	3084	THROUGH 3093
		AGR GENERAL	3094	
		UNDEFINED	3095	THROUGH 3104
		AOSR GENERAL	3105	
		UNDEFINED	3106	THROUGH 3115
		AR GENERAL	3116	
		ACHELOUS	3117	
		AJAX	3118	
		AMPHION	3119	
		AMUR	3120	
		ARL I	3121	
		DALIANG	3122	
		DILIGENCE	3123	
		DIXIE	3124	
		JULES VERNE	3125	
		OSKOL	3126	
		RHIN	3127	

FIELD CODING FOR J14.0C5 (SHEET 61)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		STALWART	3128	
		UNDEFINED	3129 THROUGH 3145	
		ARL GENERAL	3146	
		ARCHELOUS	3147	
		UNDEFINED	3148 THROUGH 3157	
		AGE GENERAL	3158	
		BELGICA	3159	
		BERRY	3160	
		UNDEFINED	3161	
		COMMANDANT RIVIERE	3162	
		DESN	3163	
		DOBRYNYA NIKITICH	3164	
		EF 3	3165	
		HENRI POINCARE	3166	
		ILE D'OLERON	3167	
		IVANSUSANIN	3168	
		KOLOMNA	3169	
		LENTA	3170	
		MARSHAL NEDELIN	3171	
		MOMA	3172	
		MP-8	3173	
		MUNA	3174	
		NARVIK	3175	
		OS-3	3176	
		POINT LOMA	3177	
		POTOK	3178	
		QUARTO	3179	
		SASHA	3180	
		SIBIR	3181	
		SO-1	3182	
		T-43	3183	
		TRITON	3184	
		DISUSED	3185	
		YAL 01	3186	
		YANXI	3187	
		ROSSETTI	3188	
		DENTI	3189	
		MONGE	3190	
		UNDEFINED	3191 THROUGH 3227	
		ARS GENERAL	3228	
		BOLSTER	3229	
		DISUSED	3230	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		INGUL	3231	
		KATUN I	3232	
		KATUN II	3233	
		KOWAN	3234	
		LSIL 351	3235	
		MIKHAIL RUDNITSKY	3236	
		OREL	3237	
		PAMIR	3238	
		PIAST	3239	
		PROTEO	3240	
		PS-11	3241	
		SAFEGUARD	3242	
		SILVA	3243	
		SPASILAC	3244	
		DISUSED	3245	
		US 149 FT	3246	
		YANDING	3247	
		UNDEFINED	3248 THROUGH 3273	
		ARSD GENERAL	3274	
		UNDEFINED	3275 THROUGH 3284	
		ASVR GENERAL	3285	
		UNDEFINED	3286 THROUGH 3295	
		AOS GENERAL	3296	
		ALATNA	3297	
		LUZA	3298	
		URAL	3299	
		VALA	3300	
		TONTI	3301	
		UNDEFINED	3302 THROUGH 3311	
		AF GENERAL	3312	
		CROITOR	3313	
		DANLIN	3314	
		MAYAK	3315	
		RIEGEL	3316	
		UNDEFINED	3317 THROUGH 3326	
		AKS GENERAL	3327	
		UNDEFINED	3328 THROUGH 3337	
		AKSL GENERAL	3338	
		UNDEFINED	3339 THROUGH 3348	
		AFL GENERAL	3349	
		UNDEFINED	3350 THROUGH 3359	
		ASR GENERAL	3360	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		ANTEO	3361	
		CHANTICLEER	3362	
		DAHIANG	3363	
		DALANG	3364	
		ELBRUS	3365	
		FEHMARN (TYPE 720B)	3366	
		FUSHIMI	3367	
		GALATI	3368	
		HUDONG	3369	
		KURTARAN	3370	
		NEPA	3371	
		PIGEON	3372	
		PRUT	3373	
		ROSLAVL	3374	
		SPASILAC	3375	
		VALDAY	3376	
		ZHONGHUA	3377	
		UNDEFINED	3378 THROUGH 3401	
		AS GENERAL	3402	
		ACHELOUS	3403	
		AEGIR	3404	
		DISUSED	3405	
		ATREK	3406	
		CHIYODA	3407	
		DADONG	3408	
		DAZHOU	3409	
		DIVER	3410	
		DNEPR	3411	
		DNEPR (MODIFIED)	3412	
		DON	3413	
		EMORY S LAND	3414	
		FULTON	3415	
		HUNLEY	3416	
		L Y SPEAR	3417	
		PROTEUS	3418	
		DISUSED	3419	
		SIMON LAKE	3420	
		UGRA	3421	
		UNDEFINED	3422 THROUGH 3447	
		ASL GENERAL	3448	
		UNDEFINED	3449 THROUGH 3458	
		AGS GENERAL	3459	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		AGS 39 CLASS	3460	
		AKASHI	3461	
		ALMEIDA CARVALHO	3462	
		AMMIRAGLIO MAGNAGHI	3463	
		ANDRIJA MOHOROVICIC	3464	
		AUK	3465	
		BIYA	3466	
		BOLOGUE	3467	
		UNDEFINED	3468	
		BUYSKES	3469	
		C4-S-A1 TYPE (CONVERTED)	3470	
		CHAUVENET	3471	
		COOK	3472	
		DING HAI	3473	
		FINIK	3474	
		FS DESIGN 330	3475	
		FUTAMI	3476	
		HAMASHIO	3477	
		HEIYO	3478	
		KAIBOKAN I	3479	
		KAIYO	3480	
		KAMENKA	3481	
		DISUSED	3482	
		UNDEFINED	3483	
		L'ESPERANCE	3484	
		UNDEFINED	3485	
		LENTRA	3486	
		LSIL	3487	
		MEIYO	3488	
		MELITOPOL	3489	
		MOMA	3490	
		MONOWAI	3491	
		MORESBY	3492	
		MP-8	3493	
		MSC-294 (BLUEBIRD)	3494	
		NYRYAT I	3495	
		NYRYAT II	3496	
		SAMARA	3497	
		SHOYO	3498	
		SILAS BENT	3499	
		STERNE	3500	
		SUMA	3501	

FIELD CODING FOR J14.0C5

(SHEET 65)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		T-43	3502	
		TAKUYO	3503	
		TELNOVSK	3504	
		TELNOVSK (MODIFIED)	3505	
		TENYO	3506	
		VICTORY (CONVERTED)	3507	
		WILKES	3508	
		YANLAI	3509	
		YANXU	3510	
		MIRTO	3511	
		MARS	3512	
		LAPEROUSE	3513	
		UNDEFINED	3514 THROUGH 3579	
		AGSA GENERAL	3580	
		UNDEFINED	3581 THROUGH 3590	
		AGSC GENERAL	3591	
		EXPLORER	3592	
		FLINDERS	3593	
		TAINO	3594	
		BULLDOG	3595	
		ROEBUCK	3596	
		UNDEFINED	3597 THROUGH 3604	
		AX GENERAL	3605	
		ARIS	3606	
		DISUSED	3607	
		JADRAN	3608	
		JERVIS BAY	3609	
		JOSE MARTI	3610	
		MP-8	3611	
		SMOLNY	3612	
		UGRA	3613	
		VIETNAM HEROICO	3614	
		WODNIK	3615	
		UNDEFINED	3616 THROUGH 3630	
		AXL GENERAL	3631	
		UNDEFINED	3632	
		LEOPARD	3633	
		MAYAK	3634	
		UNDEFINED	3635 THROUGH 3642	
		AXS GENERAL	3643	
		AMERIGO VESPUCCI	3644	
		CAROLY	3645	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		CARSARO II	3646	
		GORCH FOCK (TYPE 441A)	3647	
		MIRCEA	3648	
		PALINURO	3649	
		SAGRES	3650	
		STELLA POLARE	3651	
		UNDEFINED	3652	THROUGH 3659
		AT GENERAL	3660	
		UNDEFINED	3661	THROUGH 3665
		ATA GENERAL	3666	
		ABNAKI	3667	
		APACHE	3668	
		ARMY 254	3669	
		ATAK	3670	
		ATLANTE	3671	
		AZUMA	3672	
		BELIER	3673	
		UNDEFINED	3674	
		GAJ	3675	
		GNIEWKO	3676	
		GORYN	3677	
		GROMOVOY	3678	
		KUDRET	3679	
		MAITO	3680	
		MB-31	3681	
		MB-65	3682	
		MOTYL	3683	
		OKHTENSKIY	3684	
		ONCU	3685	
		POWHATAN	3686	
		ROSLAVL	3687	
		ROYSTERER	3688	
		SAINT	3689	
		SCHULTZ XAVIER	3690	
		SORUM	3691	
		TENACE	3692	
		TUZHONG	3693	
		TYPHOON	3694	
		WANGER00GE (TYPE 722B)	3695	
		ZENIT	3696	
		MAITO	3697	
		ARMEN	3698	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		UNDEFINED	3699 THROUGH 3737	
		ATR GENERAL	3738	
		TENACE	3739	
		UNDEFINED	3740 THROUGH 3748	
		ATS GENERAL	3749	
		EDENTON	3750	
		OKHTENSKY	3751	
		LANGEOOG (TYPE 754)	3752	
		ARGUS	3753	
		UNDEFINED	3754 THROUGH 3762	
		AWT GENERAL	3763	
		UNDEFINED	3764	
		BASENTO	3765	
		FUZHOU (MODIFIED)	3766	
		KANGAN	3767	
		LEIZHOU (MODIFIED)	3768	
		LSIL	3769	
		MANYCH	3770	
		MINCIO	3771	
		PIAVE	3772	
		TEVERE	3773	
		ULUBAT	3774	
		VODA	3775	
		YW-83	3776	
		Z	3777	
		UNDEFINED	3778 THROUGH 3797	
		SERVICE CRAFT GENERAL	3798	
		BARGE, GENERAL	3799	
		YO GENERAL	3800	
		YOG GENERAL	3801	
		YHT GENERAL	3802	
		YRNS GENERAL	3803	
		YOS GENERAL	3804	
		YPK GENERAL	3805	
		YRR GENERAL	3806	
		YRB GENERAL	3807	
		YRST GENERAL	3808	
		YOM GENERAL	3809	
		YOSS GENERAL	3810	
		YW GENERAL	3811	
		UNDEFINED	3812 THROUGH 3827	
		YD GENERAL	3828	

FIELD CODING FOR J14.0C5

(SHEET 68)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		YM GENERAL	3829	
		YFD GENERAL	3830	
		YFP GENERAL	3831	
		YGT GENERAL	3832	
		YR GENERAL	3833	
		UNDEFINED	3834 THROUGH 3840	
		YFD GENERAL	3841	
		YFDB GENERAL	3842	
		YFDM GENERAL	3843	
		YFDL GENERAL	3844	
		UNDEFINED	3845 THROUGH 3850	
		YRD GENERAL	3851	
		YRDB GENERAL	3852	
		YRDM GENERAL	3853	
		YRDL GENERAL	3854	
		UNDEFINED	3855 THROUGH 3861	
		LIGHTER GENERAL	3862	
		YE GENERAL	3863	
		YF GENERAL	3864	
		YFC GENERAL	3865	
		YFR GENERAL	3866	
		YC GENERAL	3867	
		YFT GENERAL	3868	
		UNDEFINED	3869 THROUGH 3878	
		YT GENERAL	3879	
		YTB GENERAL	3880	
		YTM GENERAL	3881	
		YTL GENERAL	3882	
		UNDEFINED	3883 THROUGH 3892	
		YAGF GENERAL	3893	
		YAG GENERAL	3894	
		YV GENERAL	3895	
		YNG GENERAL	3896	
		YP GENERAL	3897	
		YFU GENERAL	3898	
		YAM GENERAL	3899	
		YNC GENERAL	3900	
		YLC GENERAL	3901	
		YVS GENERAL	3902	
		YRG GENERAL	3903	
		YAGT GENERAL	3904	
		YPT GENERAL	3905	

FIELD CODING FOR J14.0C5

(SHEET 69)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		YRC GENERAL	3906	
		YDT GENERAL	3907	
		YNT GENERAL	3908	
		YH GENERAL	3909	
		YFB GENERAL	3910	
		YTR GENERAL	3911	
		YFL GENERAL	3912	
		YAC GENERAL	3913	
		YSR GENERAL	3914	
		YSG GENERAL	3915	
		YDG GENERAL	3916	
		KHABAROV	3917	
		UNDEFINED	3918 THROUGH 3936	
		TM GENERAL	3937	
		TMD GENERAL	3938	
		TMB GENERAL	3939	
		TMK GENERAL	3940	
		TMF GENERAL	3941	
		TMC GENERAL	3942	
		TMCS GENERAL	3943	
		TMWW GENERAL	3944	
		TMA GENERAL	3945	
		TMH GENERAL	3946	
		TMGB GENERAL	3947	
		TMI GENERAL	3948	
		TML GENERAL	3949	
		TMOT GENERAL	3950	
		TMM GENERAL	3951	
		TMP GENERAL	3952	
		TMFR GENERAL	3953	
		TMR GENERAL	3954	
		TMOR GENERAL	3955	
		TMOL GENERAL	3956	
		TME GENERAL	3957	
		TMGS GENERAL	3958	
		TMLS GENERAL	3959	
		TMS GENERAL	3960	
		TMOS GENERAL	3961	
		TMO GENERAL	3962	
		TMX GENERAL	3963	
		TMWT GENERAL	3964	
		UNDEFINED	3965 THROUGH 3989	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		TMT GENERAL	3990	
		TMTR GENERAL	3991	
		TMTS GENERAL	3992	
		UNDEFINED	3993 THROUGH 4002	
		TU GENERAL	4003	
		TUF GENERAL	4004	
		TUB GENERAL	4005	
		TUI GENERAL	4006	
		TUR GENERAL	4007	
		TUT GENERAL	4008	
		TUS GENERAL	4009	
		TUC GENERAL	4010	
		TUW GENERAL	4011	
		UNDEFINED	4012 THROUGH 4023	
		TJ GENERAL	4024	
		TJF GENERAL	4025	
		TJC GENERAL	4026	
		TJCS GENERAL	4027	
		TJGB GENERAL	4028	
		UNDEFINED	4029 THROUGH 4038	
		TS GENERAL	4039	
		TSG GENERAL	4040	
		TSR GENERAL	4041	
		UNDEFINED	4042 THROUGH 4052	
		MPS GENERAL	4053	
		UNDEFINED	4054 THROUGH 4069	
		SURFACE SPECIFIC TYPE	4070 THROUGH 4094	
		1-25		
		RESET TO NO STATEMENT	4095	

809	001	SUBSURFACE (MARITIME) SPECIFIC TYPE		THE SPECIFIC TYPE OF POINT OR TRACK WITH AN ENVIRONMENT/CATEGORY OF SUBSURFACE (MARITIME).

		NO STATEMENT	0	
		SS GENERAL	1	
		ABTAO SS	2	
		DISUSED	3	
		DISUSED	4	
		UNDEFINED	5	
		DISUSED	6	
		GUPPY II SS	7	
		GUPPY IIA SS	8	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
809	001	SUBSURFACE (MARITIME) SPECIFIC (CONTINUED) TYPE		

		GUPPY III SS	9	
		HAI LUNG SS	10	
		DISUSED	11	
		SAURO (TYPE 1081) SS	12	
		SAURO (IMPROVED) SS	13	
		TANG SS	14	
		TYPE SNA 72 SS	15	
		UZUSHIO SS	16	
		WALRUS SS	17	
		YUUSHIO SS	18	
		UNDEFINED	19	
		DISUSED	20	
		PELOSI SS	21	
		UNDEFINED	22 THROUGH 360	
		SSB GENERAL	361	
		GOLF SSB	362	
		GOLF II SSB	363	
		GOLF III SSB	364	
		GOLF V SSB	365	
		UNDEFINED	366 THROUGH 440	
		SSBN GENERAL	441	
		BENJAMIN FRANKLIN SSBN	442	
		DELTA I SSBN	443	
		DELTA II SSBN	444	
		DELTA III SSBN	445	
		DELTA IV SSBN	446	
		HOTEL III SSBN	447	
		DISUSED	448	
		L'INFLEXIBLE SSBN	449	
		DISUSED	450	
		UNDEFINED	451	
		OHIO SSBN	452	
		RESOLUTION SSBN	453	
		TYPHOON SSBN	454	
		VANGUARD SSBN	455	
		YANKEE SSBN	456	
		YANKEE I SSBN	457	
		YANKEE II SSBN	458	
		XIA SSBN	459	
		LE TERRIBLE SSBN	460	
		UNDEFINED	461 THROUGH 720	
		SSN GENERAL	721	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
809	001	SUBSURFACE (MARITIME) SPECIFIC (CONTINUED)		
		TYPE		

		AKULA SSN	722	
		ALFA SSN	723	
		AMATHEPT SSN	724	
		CHARLIE/VICTOR SSGN/SSN	725	
		CHURCHILL SSN	726	
		ECHO/NOVEMBER SSGN/SSN	727	
		DISUSED	728	
		DISUSED	729	
		HAN SSN	730	
		HOTEL SSN	731	
		LOS ANGELES SSN	732	
		MIKE SSN	733	
		NARWHAL SSN	734	
		DISUSED	735	
		RUBIS SSN	736	
		SEAWOLF SSN	737	
		SIERRA SSN	738	
		DISUSED	739	
		DISUSED	740	
		STURGEON SSN	741	
		SWIFTSURE SSN	742	
		TRAFALGAR SSN	743	
		DISUSED	744	
		VICTOR I SSN	745	
		VICTOR II SSN	746	
		VICTOR III SSN	747	
		YANKEE SSN	748	
		VIRGINIA SSN	749	
		UNDEFINED	750 THROUGH 1200	
		SSG GENERAL	1201	
		JULIETT SSG	1202	
		UNDEFINED	1203 THROUGH 1245	
		SSGN GENERAL	1246	
		CHARLIE I SSGN	1247	
		CHARLIE II SSGN	1248	
		ECHO II SSGN	1249	
		OSCAR SSGN	1250	
		PAPA SSGN	1251	
		UNDEFINED	1252 THROUGH 1345	
		SSK GENERAL	1346	
		AGOSTA SSK	1347	
		UNDEFINED	1348	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
809	001	SUBSURFACE (MARITIME) SPECIFIC (CONTINUED)		
		TYPE		

		FOXTROT SSK	1349	
		HEROJ SSK	1350	
		KILO SSK	1351	
		MING SSK	1352	
		NARVAL SSK	1353	
		DISUSED	1354 THROUGH 1355	
		ROMEO SSK	1356	
		SAVA SSK	1357	
		SUTJESKA SSK	1358	
		TANGO SSK	1359	
		UPHOLDER SSK	1360	
		WHISKEY SSK	1361	
		WHISKEY V SSK	1362	
		ZULU IV SSK	1363	
		DORIS SSK	1364	
		VICTORIA SSK	1365	
		TYPE 212 SSK	1366	
		UNDEFINED	1367 THROUGH 1665	
		SSC GENERAL	1666	
		DELFINEN SSC	1667	
		DRAKEN SSC	1668	
		NAECKEN SSC	1669	
		NARHVALEN SSC	1670	
		SJOORMEN SSC	1671	
		TOTI TYPE 1075 SSC	1672	
		TYPE 205 SSC	1673	
		TYPE 206 SSC	1674	
		KOBHEN SSC	1675	
		TYPE 209 (TYPE 1100) SSC	1676	
		TYPE 209 (TYPE 1200) SSC	1677	
		TYPE 209 (TYPE 1300) SSC	1678	
		TYPE 209 (TYPE 1400) SSC	1679	
		TYPE 209 (TYPE 1500) SSC	1680	
		ULA SSC	1681	
		TYPE 211 SSC	1682	
		VASTERGOETLAND SSC	1683	
		TYPE 206A SSC	1684	
		UNDEFINED	1685 THROUGH 1945	
		SSA GENERAL	1946	
		BRAVO SSA	1947	
		DOLPHIN (AGSS) SSA	1948	
		GOLF I SSA	1949	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

809	001	SUBSURFACE (MARITIME) SPECIFIC (CONTINUED) TYPE		
-----	-----	--	--	--

GOLF I (MODIFIED) SSA	1950
GOLF II SSA	1951
INDIA SSA	1952
LIMA SSA	1953
ROMEO SSA	1954
ZULU SSA	1955
UNDEFINED	1956 THROUGH 4069
SUBSURFACE SPECIFIC TYPE 1-25	4070 THROUGH 4094
RESET TO NO STATEMENT	4095

810	001	LAND (GROUND) SPECIFIC TYPE		
-----	-----	-----------------------------	--	--

THE SPECIFIC TYPE OF POINT OR TRACK
WITH AN ENVIRONMENT/CATEGORY OF
LAND (GROUND).

NO STATEMENT	0
TOW	1
DRAGON	2
LANCE	3
SHILLEAGH	4
SERGEANT	5
AMMUNITION	6
POL	7
OBSERVATION POSTS	8
RADIO DIRECTION FINDER	9
RIVER	10
STREAM	11
LAKE	12
MARSH/SWAMP	13
MOUNTAIN	14
HILLTOP	15
RIDGE	16
DEPRESSION	17
VALLEY	18
CAVE	19
BRIDGE	20
DAM	21
BUILDING	22
VILLAGE	23
TOWN	24
ROAD INTERSECTION	25
HOSPITAL	26
HAWK	27

FIELD CODING FOR J14.0C5

(SHEET 75)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE -----	(CONTINUED)	
		I-HAWK	28	
		PATRIOT	29	
		NIKE	30	
		REDEYE	31	
		STINKER	32	
		HELLFIRE	33	
		PERSHING	34	
		JEEP	35	
		CAR	36	
		MOTORCYCLE	37	
		BICYCLE	38	
		AMPHIBIOUS VEHICLE	39	
		RIVER CROSSING EQUIPMENT	40	
		MECHANIZED MINE SWEEPER	41	
		MOBILE RADAR	42	
		SMOKE GENERATOR	43	
		(SSSB) SHIP SHORE SHIP BUFFER	44	
		(RADIL) ROCC AWACS	45	
		DIGITAL INTERFACE LINK		
		(ASIT) ADAPTABLE SURFACE	46	
		INTERFACE TERMINAL		
		(AEGIS) AEW GROUND	47	
		INTERFACE SEGMENT		
		AMBULANCE	48	
		BIOLOGICAL WEAPONS	49	
		CHEMICAL WEAPONS	50	
		NUCLEAR WEAPONS	51	
		ENGINEER VEHICLES	52	
		GENERATOR	53	
		JAMMERS	54	
		MAINTENANCE VEHICLE	55	
		MULTIPLE ROCKET LAUNCHER	56	
		RADIO	57	
		REMOTE SENSOR	58	
		SELF PROPELLED ARTILLERY	59	
		TACTICAL BRIDGE	60	
		TOWED ARTILLERY GUN	61	
		RECOILLESS RIFLE	62	
		(TACCP) TACTICAL COMMAND POST	63	
		BRIGADE	64	
		CORPS	65	

FIELD CODING FOR J14.0C5

(SHEET 76)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE -----	(CONTINUED)	
		GROUP	66	
		DIVISION	67	
		REGIMENT	68	
		BATTALION	69	
		COMPANY	70	
		PLATOON	71	
		SQUADRON	72	
		AIRBASE	73	
		WING	74	
		ANTI-AIRCRAFT GUN	75	
		AIR DEFENSE ARTILLERY GUN	76	
		MORTAR	77	
		FLAMETHROWER	78	
		TSC/MOCC/MARITIME HEADQUARTERS	79	
		MAIN BATTLE TANK	80	
		MEDIUM TANK	81	
		LIGHT TANK	82	
		TRAIN	83	
		ARMORED PERSONNEL VEHICLE	84	
		ARMORED INFANTRY FIGHTING VEHICLE	85	
		LIGHT TRUCK	86	
		MEDIUM TRUCK	87	
		HEAVY TRUCK	88	
		TANK TRANSPORTER	89	
		DUMMY	90	
		TRAP	91	
		POINT TARGET	92	
		EA SITE	93	
		ARMORED PERSONNEL CARRIER	94	
		ARMORED INFANTRY FIGHTING VEHICLE	95	
		GCI SITE	96	
		CRC	97	
		TACC (AF)	98	
		CRP	99	
		TACC (MC)	100	
		MPC	101	
		TAOC	102	

FIELD CODING FOR J14.0C5

(SHEET 77)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		AADCCS (AN/TSQ-73)	103	
		DASC	104	
		FACP	105	
		FASC	106	
		AADCP	107	
		ASRT	108	
		NCC	109	
		RCC	110	
		ROCC	111	
		DC	112	
		WOC	113	
		(ASOC) AIR SUPPORT	114	
		OPERATIONS CENTER		
		(TCO) TACTICAL COMBAT	115	
		OPERATIONS CENTER		
		(TOC) TACTICAL	116	
		OPERATIONS CENTER		
		(ARMY)		
		CHAPPARAL	117	
		FIRE DIRECTION CENTER	118	
		FIRE UNIT	119	
		DIVARTY	120	
		BATTERY	121	
		SELF-PROPELLED ARTILLERY	122	
		(GOC) GROUND OPERATIONS	123	
		CENTER		
		(ICC) INFORMATION	124	
		COORDINATION CENTER		
		(BOC) BATTERY OPERATIONS	125	
		CENTER		
		(ECS) ENGAGEMENT CONTROL	126	
		STATION		
		(PCP) PLATOON COMMAND	127	
		POST		
		(CRG) COMMUNICATIONS	128	
		RELAY GROUP		
		TUNNELS	129	
		RAILYARDS	130	
		BENCHMARK	131	
		TROOP	132	
		LANDING ZONE	133	
		DROP ZONE	134	
		ASSEMBLY OR STAGING AREA	135	

FIELD CODING FOR J14.0C5

(SHEET 78)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		DECONTAMINATION SITE	136	
		RE-ENTRY POINT/LINE	137	
		CROSSING AREA FOR		
		RECON PATROLS		
		SAM	138	
		SSM	139	
		ANTI-TANK WEAPON	140	
		DIRECT SUPPORT	141	
		GENERAL SUPPORT	142	
		INTERCEPTION	143	
		BLOCKING	144	
		REINFORCING	145	
		REDEPLOYMENT	146	
		POLICING	147	
		INTRUDING	148	
		PREPARING BARRIER	149	
		DUMPING EQUIPMENT	150	
		RELIEF	151	
		CONVOY	152	
		ANTI-AIRCRAFT	153	
		AIR DEFENSE ARTILLERY	154	
		ARTILLERY	155	
		SURVEILLANCE	156	
		PICKETING	157	
		LOGISTICS SUPPORT	158	
		SEARCH	159	
		DIRECT ARTILLERY SUPPORT	160	
		GENERAL ARTILLERY	161	
		SUPPORT		
		MAINTAINING LINE OF	162	
		COMMUNICATION		
		COMMITTING	163	
		COUNTER-ATTACK	164	
		ELECTRONIC WARFARE	165	
		THREATEN	166	
		DESTROY	167	
		CONTACT	168	
		EVALUATION	169	
		TRANSPORTER	170	
		ARMORED VEHICLE	171	
		GUN	172	
		HALF TRACK	173	
		COMMUNICATIONS EQUIPMENT	174	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	
		TARGET	175	
		AIR DEFENSE SITE	176	
		FIM-92 STINGER	177	
		NIM-23 HAWK	178	
		MIM-42 REDEYE	179	
		MIM-72 CHAPARRAL	180	
		MIM-104 PATRIOT	181	
		RIM-2 TERRIER	182	
		RIM-7 SEA SPARROW	183	
		RIM-8 TALOS	184	
		RIM-24 TARTAR	185	
		RIM-66 STANDARD MISSILE	186	
		RIM-67 STANDARD MISSILE	187	
		BLOWPIPE	188	
		DISUSED	189 THROUGH 190	
		SEA DART	191	
		DISUSED	192 THROUGH 193	
		CROTALE	194	
		RAPIER	195	
		RBS-70/GIRAFFE	196	
		SAM BLOODHOUND	197	
		SAM ROLAND	198	
		SA-2 GUIDELINE	199	
		SA-3 GOA	200	
		SA-4 GANEF	201	
		SA-N-3 GOBLET	202	
		SA-5 GAMMON	203	
		SA-N-4 GECKO	204	
		SA-6 GAINFUL	205	
		SA-N-6 GRUMBLE	206	
		SA-7 GRAIL	207	
		SA-8 GECKO	208	
		SA-9 GASKIN	209	
		SA-10 GRUMBLE	210	
		SA-11 GADFLY	211	
		SA-12	212	
		SA-13 GOPHER	213	
		MISTRAL	214	
		SA-N-7 GADFLY	215	
		SA-N-8 GREMLIN	216	
		SA-14 GREMLIN	217	
		SA-16 GIMLET	218	
		SA-X-17	219	

FIELD CODING FOR J14.0C5

(SHEET 80)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		TOC (THAAD)	220	
		SSI (THAAD)	221	
		LCS (THAAD)	222	
		LAUNCHER (THAAD)	223	
		TMD-GBR (THAAD)	224	
		JTAGS	225	
		ADTOC/BN	226	
		ADTOC/BDE	227	
		ADCP	228	
		SM-2 BLOCK II	229	
		SM-2 BLOCK III	230	
		SM-2 BLOCK IIIA	231	
		SM-2 BLOCK IIIB	232	
		SM-2 BLOCK IV	233	
		SM-2 BLOCK IVA	234	
		SM-3 LEAP	235	
		SA-N-5 GRAIL	236	
		SA-N-11 GRISOM	237	
		SA-12A GLADIATOR	238	
		SA-12B GIANT	239	
		SA-14 GREMLIN	240	
		SA-15 GAUNTLET	241	
		SA-17 GRIZZLY	242	
		SA-N-12 GRIZZLY	243	
		SA-18 GROUSE	244	
		SA-19 GRISOM	245	
		RIM-116 RAM	246	
		ADATS	247	
		JAVELIN	248	
		STARBURST	249	
		STARSTREAK	250	
		ASPIDER	251	
		FRONT DOOR	252	
		ROLAND II	253	
		AKASH	254	
		ANZA	255	
		ANZA II	256	
		CSA-1	257	
		CSA-2	258	
		CSA-4	259	
		CSA-5	260	
		FM-80	261	
		HN-5	262	

5.3-421

MIL-STD-6016B

FIELD CODING FOR J14.0C5

(SHEET 81)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		NK-7	263	
		NK-16	264	
		PANTZYR	265	
		RAPIER 2000/JERNAS	266	
		RBS-90	267	
		SAKR	268	
		SAVA	269	
		SHANINE	270	
		SKYGUARD ASPIDE	271	
		SPADA	272	
		TAM SAM	273	
		TIGERCAT	274	
		VANGUARD	275	
		SA-N-1 GOA	276	
		SA-N-9 GAUNTLET	277	
		SA-N-10	278	
		ALBATROS/ASPIDE	279	
		SM-1	280	
		SA-2 IRAQ MOD	281	
		SA-2 NORTH KOREA RO	282	
		AEGIS-TI	283	
		MASURGS	284	
		ROCK CAKE	285	
		SEA INDIGO	286	
		TANSAM	287	
		TOKEN A/D	288	
		GUARDSMAN	289	
		SILKWORM	290	
		SNOW DRIFT 11/17	291	
		TIGER S	292	
		TIGER G	293	
		TUBE ARM SA-11	294	
		SEACAT 262/903/904	295	
		AN/MPQ-4	296	
		AN-TPQ-36	297	
		AN/TPS-25	298	
		CYMBERLINE	299	
		PORK TROUGH 1	300	
		RASIT	301	
		SNAR-6	302	
		TALL MIKE	303	
		AN/FPN-33/36/40	304	
		AN/TPN-12/17	305	

5.3-422

MIL-STD-6016B

FIELD CODING FOR J14.0C5

(SHEET 82)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		CPN-4, FPN-16/22	306	
		RP-2E	307	
		RP-4G	308	
		THD-1010/1013	309	
		TPN-8/14/18TSQ-7	310	
		TWO SPOT	311	
		CSA-X-2	312	
		ASR-0	313	
		FALCON-G	314	
		MARCON LN66TPS66	315	
		SHEET BEND	316	
		WALL RUST A/B	317	
		DON-2	318	
		DONKAY/PALM FROND	319	
		EYE SHIELD	320	
		MARELD	321	
		PEEL PAIR	322	
		POT HEAD	323	
		RACAL-DECCA	324	
		RICE FIELD	325	
		RICE SCREEN	326	
		RICE CUP	327	
		SQUARE TIE	328	
		SS-N-2	329	
		STRUT CURVE	330	
		STRUT PAIR	331	
		BOFI	332	
		CORN CAN	333	
		DRUM TILT	334	
		ELDORADO	335	
		FLAP WHEEL	336	
		FLEDERMAUS	337	
		FLYCATCHER	338	
		GEPARD	339	
		GUN DISH	340	
		SPAAMG	341	
		TEAMPLAY	342	
		TEAMWORK	343	
		VULCAN	344	
		9LV 200	345	
		AN/SPG-50	346	
		BASS TILT	347	
		GOALKEEPER	348	

5.3-423

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE -----	(CONTINUED)	
		HAWK SCREECH	349	
		KITE SCREECH A/B	350	
		OWL SCREECH	351	
		MARK 68 FCS	352	
		MK 57/63 GFCS	353	
		MK-86 GFCS	354	
		MUFF COB	355	
		SIGNAAL STIR 180	356	
		SUN VISOR	357	
		TOP BOW	358	
		TYPE 341	359	
		VEGA	360	
		WM-20 SERIES	361	
		MARCONI S613	362	
		THIN SKIN	363	
		AN/FPS-77	364	
		MRL-1	365	
		MRL-4/5	366	
		BIG BIRD	367	
		SIDE NET	368	
		ODD LOT/PAIR/GROUP	369	
		FIRE WHEEL/MOD	370	
		BARLOCK	371	
		FIRECAN/WHIFF	372	
		GIN SLING	373	
		FRUSKA GORA	374	
		TIN SHIELD	375	
		BIG BAR/MESH	376	
		SS-N-S SCOOP PAIR	377	
		SGR-105 DA-01/00	378	
		CROSS SLOT	379	
		BACK NET/TRAP	380	
		GATE POLE/HIGH/POST	381	
		TOP LOT	382	
		RICE CAKE	383	
		JY-14/9	384	
		TIN TRAP	385	
		HEAD NET A/B/C	386	
		SLIM/SEA/HAIR NET	387	
		LOW SIEVE	388	
		EGG CUP	389	
		CUT WEB	390	
		SKYWATCH	391	

FIELD CODING FOR J14.0C5

(SHEET 84)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE -----	(CONTINUED)	
		HALF PLATE	392	
		SKIN HEAD	393	
		SIEVE FAMILY	394	
		SO-A	395	
		HIGH SHELL	396	
		AN/FPS-6/89	397	
		DECCA HF200	398	
		MARCONI 5244	399	
		TYPE 88 MK 1	400	
		MARCONI S-247	401	
		AN/MPN-11	402	
		RAT-31S	403	
		AA4 MK 6/7	404	
		AN/TPS-43	405	
		SCR-584	406	
		AN/TPS-48	407	
		MARCONI S-1006/269	408	
		PALMIER	409	
		FIREFINDER LR	410	
		VOLEX III/IV	411	
		THD-1940	412	
		HADR (HR-3000)	413	
		AN/RPS-70/72/75	414	
		MPDR-18/S	415	
		WATCHMAN	416	
		MARCONI S-631/647	417	
		MARCONI S-706/711/712	418	
		AN/TPS-73	419	
		TRS-22XX	420	
		AN/SPS-8	421	
		DECCA AWS-1	422	
		MK-26	423	
		AN/SPS-48	424	
		RAN-7S	425	
		SEA TIGER	426	
		DA-08/2LS	427	
		AWS-9 (TYPE 996)	428	
		DA-05/00	429	
		MPDR-45	430	
		TOP STEER/PLATE	431	
		STRIKE OUT	432	
		SPONGE CAKE	433	
		NC1 ROLAND	434	

5.3-425

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE -----	(CONTINUED)	
		NC1 MISTRAL	435	
		FDOC	436	
		MCT	437	
		CETAC	438	
		ISARD	439	
		UNDEFINED	440 THROUGH 4000	
		WAYPOINT	4001	
		STRIKE INITIAL POINT	4002	
		UNDEFINED	4003 THROUGH 4093	
		RESET TO NO STATEMENT	4094	
		UNDEFINED	4095	
754	001	LOCAL DISCRETE IDENTIFIER -----		LOCALLY DEFINED AMPLIFYING DATA CONCERNING A REPORTED OBJECT OR TRACK WITH DISCRETE MEANINGS ESTABLISHED BY THE OPERATIONAL COMMANDER.
		NO STATEMENT	0	
		NUMERIC	1 THROUGH 4094	LOCALLY DEFINED MEANINGS.
		RESET TO NO STATEMENT	4095	

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J14.0C6

WORD TITLE: PARAMETRIC INFORMATION CONTINUATION WORD 6

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00	:	
																		: CONTINUATION WORD :		: WORD :						:
<---																		:	LABEL		:	FORMAT				:
																		:			:					:
																		:	5		:	2				:

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

CALLSIGN, OBSERVED

																								:
60																								:

:	69	68	67:	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50		
:	SPARE			:																	---	>
:	3			:																		

WORD DESCRIPTION

WORD NUMBER: J14.0C6

WORD TITLE: PARAMETRIC INFORMATION CONTINUATION WORD 6

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	00110
1850 001	CALLSIGN, OBSERVED (CAL SGN)	7-	66 60	
756 003	SPARE	67-	69 3	

FIELD CODING FOR J14.0C6 (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1850	001	CALLSIGN, OBSERVED		REPORTS THE OBSERVED CALLSIGN.

		CALLSIGN, OBSERVED		THE 60 BITS ARE DIVIDED INTO TEN GROUPS OF 6 BITS. EACH GROUP IS INTERPRETED INDEPENDENTLY IN ACCORDANCE WITH THE FOLLOWING CODE:
		BLANK	0	
		1	1	
		2	2	
		3	3	
		4	4	
		5	5	
		6	6	
		7	7	
		8	8	
		9	9	
		A	10	
		B	11	
		C	12	
		D	13	
		E	14	
		F	15	
		G	16	
		H	17	
		I	18	
		J	19	
		K	20	
		L	21	
		M	22	
		N	23	
		O	24	
		P	25	
		Q	26	
		R	27	
		S	28	
		T	29	
		U	30	
		V	31	
		W	32	
		X	33	
		Y	34	
		Z	35	
		UNDEFINED	36 THROUGH 62	
		ZERO	63	

MIL-STD-6016B

J14.2 MESSAGE SUMMARY

PURPOSE

The J14.2 Electronic Warfare Control/Coordination message provides the means for EW participants to coordinate EW activities among one another.

DATA ELEMENT SUMMARY

<u>J14.2I</u>		<u>J14.2C1 (Continued)</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	SECTOR WIDTH	8
LABEL, J-SERIES	5	ELEVATION ANGLE	10
SUBLABEL, J-SERIES	3	SPARE	13
MESSAGE LENGTH INDICATOR	3		
TRACK NUMBER, ADDRESSEE	15	<u>J14.2C2</u>	
ELECTRONIC WARFARE ACTION	6	DATA ELEMENT	# BITS
VALUE		WORD FORMAT	2
TRACK NUMBER, REFERENCE	19	CONTINUATION WORD LABEL	5
TASK PRIORITY	3	LATITUDE, 0.0051 MINUTE	21
REQUEST NUMBER	3	LONGITUDE, 0.0051 MINUTE	22
SECTOR/AREA/LOCATION INDICATOR	2	AREA MAJOR AXIS	6
RECEIPT/COMPLIANCE	5	AREA MINOR AXIS	6
RECURRENCE RATE, RECEIPT/	4	AXIS ORIENTATION	8
COMPLIANCE			
		<u>J14.2C3</u>	
<u>J14.2E0</u>		DATA ELEMENT	# BITS
DATA ELEMENT	# BITS	WORD FORMAT	2
WORD FORMAT	2	CONTINUATION WORD LABEL	5
IMMEDIATE ACTION INDICATOR	1	EMITTER FUNCTION	7
MINUTE	6	EMITTER NUMBER	16
HOUR	5	EMITTER NUMBER INDICATOR	3
SECOND	6	MODE NUMBER	6
TIME DURATION	4	MODULATION CODE	4
TRACK NUMBER, ASSOCIATED	19	WARTIME RESERVE MODE INDICATOR	1
REFERENCE ELECTRONIC WARFARE	6	EMITTER CONFIDENCE	3
ACTION VALUE		SPARE	23
DECOY TYPE	3		
DECOY MISSION	3	<u>J14.2C4</u>	
INDEX NUMBER	6	DATA ELEMENT	# BITS
PERIODICITY OF REPORT	3	WORD FORMAT	2
ELECTRONIC WARFARE COORDINATOR	1	CONTINUATION WORD LABEL	5
INDICATOR		SPARE	14
SPARE	2	FREQUENCY/FREQUENCY RANGE	1
SQUARE/CIRCLE SWITCH	2	INDICATOR	
AUTOMATIC ELECTRONIC ATTACK	1	FREQUENCY MULTIPLIER, 1	4
NEGATION		FREQUENCY, 1	20
		FREQUENCY MULTIPLIER, 2	4
		FREQUENCY, 2	20
<u>J14.2C1</u>			
DATA ELEMENT	# BITS	<u>J14.2C5</u>	
WORD FORMAT	2	DATA ELEMENT	# BITS
CONTINUATION WORD LABEL	5	WORD FORMAT	2
BEARING	12	CONTINUATION WORD LABEL	5
TRACK NUMBER, ORIGIN	19	NATIONALITY/ALLIANCE OF TRACK	7
BEARING ORIGIN	1		

MIL-STD-6016B

J14.2 MESSAGE SUMMARY (Continued)

DATA ELEMENT SUMMARY (Continued)

<u>J14.2C5 (Continued)</u>		<u>J14.2C7</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
ENVIRONMENT/CATEGORY	3	WORD FORMAT	2
SPACE PLATFORM(6)*****		CONTINUATION WORD LABEL	5
AIR PLATFORM(6)	*	CALLSIGN, OBSERVED	60
SURFACE (MARITIME) PLATFORM(6)*		SPARE	3
SUBSURFACE (MARITIME)	*		
PLATFORM(6)	*		
LAND (GROUND) PLATFORM(6)	*		
SPARE(6)*****	6		
SPACE PLATFORM ACTIVITY(7)*****			
AIR PLATFORM ACTIVITY(7)	*		
SURFACE (MARITIME) PLATFORM	*		
ACTIVITY(7)	*		
SUBSURFACE (MARITIME) PLATFORM*			
ACTIVITY(7)	*		
LAND (GROUND) PLATFORM	*		
ACTIVITY(7)	*		
SPARE(7)*****	7		
SPACE SPECIFIC TYPE(12)*****			
AIR SPECIFIC TYPE(12)	*		
SURFACE (MARITIME) SPECIFIC	*		
TYPE(12)	*		
SUBSURFACE (MARITIME) SPECIFIC*			
TYPE(12)	*		
LAND (GROUND) SPECIFIC	*		
TYPE(12)	*		
SPARE(12)*****	12		
SPARE	16		
LOCAL DISCRETE IDENTIFIER	12		
<u>J14.2C6</u>		<u>J14.2C8</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	WORD FORMAT	2
CONTINUATION WORD LABEL	5	CONTINUATION WORD LABEL	5
SPARE	1	PRF/PRI INDICATOR	1
PLAN SOURCE	2	PULSE REPETITION FREQUENCY(23)*	23
EMISSION CONTROL PLAN	4	PULSE REPETITION INTERVAL(23)**	39
PLAN MODIFICATION	3	SPARE	
SPARE	4		
TIME SHARING IMPLEMENTATION	6		
RADIATION STATUS INDICATOR	4		
RADIATION RESTRICTION	6		
CHANGE RADIATION FACTOR	3		
PLATFORM TYPE	6		
CIRCUIT	6		
LORAN FILTER SETTING	16		
SPARE	2		

MIL-STD-6016B

J14.2 TRANSMIT/RECEIVE RULES

TITLE: Electronic Warfare Control/Coordination Message

TRANSMIT RULES

1. The J14.2 Electronic Warfare Control message shall be transmitted by C² EW net participants to control activities of the nonC² EW net participants and by the EW net participants in the coordination of activities among themselves. Table J14-3 indicates the word sequences and R/C value each Electronic Warfare Action Value contained in the J14.2 message. Transmission of the J14.2 message with the various R/C values set shall be in accordance with the procedures specified in paragraph 4.1.7.

2. Table J14-4 shows word sequences when transmissions are restricted to three or six words per time slot. The continuation word sequence is normally in ascending numerical order. The table does not cover all possible examples.

3. The J14.2 message shall be transmitted in response to a J14.2 message that has requested data when a J14.0 message is not required.

4. Any J14.2 message with the Automatic Electronic Countermeasures Negation field set to value 1 shall be transmitted with the R/C field set to value 0.

RECEIVE RULES

There are no receive rules for this message.

MIL-STD-6016B

TABLE J14-3 Required Word Sequence and Receipt/Compliance Values
for Electronic Warfare Action Values (Sheet 1 of 2)

EW ACTION VALUE	J14.2 WORDS TO BE TRANSMITTED										R/C VALUE
	I	E0	C1 ¹	C2	C3	C4	C5	C6	C7	C8	
0	X	X									0
1	X										0 OR 1
2	X										0 OR 1
3	X										0
4	X		SECT	AOP	EMIT	FREQ	NAT/ALL			PRF/PRI	0 OR 1
5	X	X									0 OR 1
6	X										0 OR 1
7	X	X			X						1
8	X	X									1
9	X	X			X						1
10	X	X			X						1
11	X	X									1
12	X	X									1
13	X	X			EMIT	FREQ				PRF/PRI	0 OR 1
14	X	X	X		EMIT	FREQ				PRF/PRI	0 OR 1
15	X	X				FREQ					0 OR 1
16	X					X					0 OR 1
17	X		SECT	AOP	EMIT	FREQ	NAT/ALL		CALL-SIGN		0
19	X	X	SECT	AOP		FREQ					0
20	X										0 OR 1
23	X	X						X			0 OR 1

MIL-STD-6016B

TABLE J14-3 Required Word Sequence and Receipt/Compliance Values
for Electronic Warfare Action Values (Sheet 2 of 2)

EW ACTION VALUE	J14.2 WORDS TO BE TRANSMITTED										R/C VALUE
	I	E0	C1 ¹	C2	C3	C4	C5	C6	C7	C8	
25	UNDEFINED										1
26	X	X									
27	UNDEFINED										
28	DIS- USED	DIS- USED									
29	DIS- USED	DIS- USED									
30	X										
31	X					X X					
32-63	UNDEFINED ACTION VALUES										

LEGEND

- X - Indicates that the J14.2 word specified must be transmitted whenever that particular EW Action Value is set. When either SECT, AOP, EMIT, FREQ, NAT/ALL, PRF/PRI, or CALLSIGN is in a continuation column, the continuation word corresponding to the column should be included in the message to provide the necessary data needed to describe the objective of the action to be taken when that particular action value is set. For example, EW Action Value = 17, Jamming request, the initial word shall be transmitted with continuation words being optional, depending on the objective of the action. If the objective is an emitter, the J14.2C3 word would be transmitted. If the objective is a frequency, the J14.2C4 word would be transmitted, etc.
- SEC - Sector
- AOP - Area-of-Probability
- EMIT - Emitter
- FREQ - Frequency
- NAT/ALL - National/Alliance
- CALLSIGN - Call Sign
- PRF/PRI - Pulse Repetition Frequency/Pulse Repetition Interval

¹ The J14.2C2 word is required when the Bearing Origin field in the J14.2C1 word is set to one.

TABLE J14-4 Required Word Sequences For Example J14.2 Messages Requiring More Than Three Words
(Sheet 1 of 7)

Serial	Type of Transmission	Limit of 3 Words Per Time Slot	More Than 3 Words Available Per Time Slot (Maximum 6)
1	EWAC=4. Search for emitters with the specified function, frequency/range, and PRF/PRI, associated with the specified platform type and/or nationality/alliance.	J14.2I/J14.2C3/J14.2C4, followed by a J14.2I/J14.2C5/J14.2C8 sequence.	J14.2I/J14.2C3/J14.2C4/J14.2C5/J14.2C8
2	EWAC=4. Search for emitters with the specified function, frequency/range, and PRF/PRI, associated with the specified platform type and/or nationality/alliance, within the defined sector.	J14.2I/J14.2C1/J14.2C3, followed by J14.2I/J14.2C4/J14.2C5 and J14.2I/J14.2C8 sequences.	J14.2I/J14.2C1/J14.2C3/J14.2C4/J14.2C5/J14.2C8
3	EWAC=4. Search for emitters with the specified function, frequency/range, and PRF/PRI, associated with the specified platform type and/or nationality/alliance, within the defined AOP.	J14.2I/J14.2E0/J14.2C2, followed by J14.2I/J14.2C3/J14.2C4 and J14.2I/J14.2C5/J14.2C8 sequences.	J14.2I/J14.2E0/J14.2C2/J14.2C3/J14.2C4/J14.2C5 followed by J14.2I/J14.2C8 sequence ⁽¹⁾ .
4	EWAC=4. Search for emitters with the specified function, frequency/range, and PRF/PRI.	J14.2I/J14.2C3/J14.2C4, followed by a J14.2I/J14.2C8 sequence.	J14.2I/J14.2C3/J14.2C4/J14.2C8
5	EWAC=4. Search for emitters with the specified function, frequency/range, and PRF/PRI, within the defined sector.	J14.2I/J14.2C1/J14.2C3, followed by a J14.2I/J14.2C4/J14.2C8 sequence.	J14.2I/J14.2C1/J14.2C3/J14.2C4/J14.2C8
6	EWAC=4. Search for emitters with the specified function, frequency/range, and PRF/PRI, within the defined AOP.	J14.2I/J14.2E0/J14.2C2, followed by J14.2I/J14.2C3/J14.2C4 and J14.2I/J14.2C8 sequences.	J14.2I/J14.2E0/J14.2C2/J14.2C3/J14.2C4/J14.2C8

TABLE J14-4 Required Word Sequences For Example J14.2 Messages Requiring More Than Three Words
(Sheet 2 of 7)

Serial	Type of Transmission	Limit of 3 Words Per Time Slot	More Than 3 Words Available Per Time Slot (Maximum 6)
7	EWAC=4. Search for emitters with the specified function and frequency/range, associated with the specified platform type and/or nationality/alliance.	J14.2I/J14.2C3/J14.2C4, followed by a J14.2I/J14.2C5 sequence.	J14.2I/J14.2C3/J14.2C4/J14.2C5
8	EWAC=4. Search for emitters with the specified function and frequency/range, associated with the specified platform type and/or nationality/alliance, within the defined sector.	J14.2I/J14.2C1/J14.2C3, followed by a J14.2I/J14.2C4/J14.2C5 sequence.	J14.2I/J14.2C1/J14.2C3/J14.2C4/J14.2C5
9	EWAC=4. Search for emitters with the specified function and frequency/range, associated with the specified platform type and/or nationality/alliance, within the defined AOP.	J14.2I/J14.2E0/J14.2C2, followed by J14.2I/J14.2C3/J14.2C4 and J14.2I/J14.2C5 sequences.	J14.2I/J14.2E0/J14.2C2/J14.2C3/J14.2C4/J14.2C5
10	EWAC=4. Search for emitters with the specified function and PRF/PRI, associated with the specified platform type and/or nationality/alliance.	J14.2I/J14.2C3/J14.2C5, followed by a J14.2I/J14.2C8 sequence.	J14.2I/J14.2C3/J14.2C5/J14.2C8
11	EWAC=4. Search for emitters with the specified function and PRF/PRI, associated with the specified platform type and/or nationality/alliance, within the defined sector.	J14.2I/J14.2C1/J14.2C3, followed by a J14.2I/J14.2C5/J14.2C8 sequence.	J14.2I/J14.2C1/J14.2C3/J14.2C5/J14.2C8

5.3-437

MIL-STD-6016B

TABLE J14-4 Required Word Sequences For Example J14.2 Messages Requiring More Than Three Words
(Sheet 3 of 7)

Serial	Type of Transmission	Limit of 3 Words Per Time Slot	More Than 3 Words Available Per Time Slot (Maximum 6)
12	EWAC=4. Search for emitters with the specified function and PRF/PRI, associated with the specified platform type and/or nationality/alliance, within the defined AOP.	J14.2I/J14.2E0/J14.2C2, followed by J14.2I/J14.2C3/J14.2C5 and J14.2I/J14.2C8 sequences.	J14.2I/J14.2E0/J14.2C2/J14.2C3/J14.2C5/J14.2C8
13	EWAC=4. Search for emitters with the specified frequency/ range and PRF/PRI, associated with the specified platform type and/or nationality/ alliance.	J14.2I/J14.2C4/J14.2C5, followed by a J14.2I/J14.2C8 sequence.	J14.2I/J14.2C4/J14.2C5/J14.2C8
14	EWAC=4. Search for emitters with the specified frequency/ range and PRF/PRI, associated with the specified platform type and/or nationality/ alliance, within the defined sector.	J14.2I/J14.2C1/J14.2C4, followed by a J14.2I/J14.2C5/J14.2C8 sequence.	J14.2I/J14.2C1/J14.2C4/J14.2C5/J14.2C8
15	EWAC=4. Search for emitters with the specified frequency/ range and PRF/PRI, associated with the specified platform type and/or nationality/ alliance, within the defined AOP.	J14.2I/J14.2E0/J14.2C2, followed by J14.2I/J14.2C4/J14.2C5 and J14.2I/J14.2C8 sequences.	J14.2I/J14.2E0/J14.2C2/J14.2C4/J14.2C5/J14.2C8
16	EWAC=4. Search for emitters with the specified function and frequency/range, within the defined sector.	J14.2I/J14.2C1/J14.2C3, followed by a J14.2I/J14.2C4 sequence.	J14.2I/J14.2C1/J14.2C3/J14.2C4

5.3-438

MIL-STD-6016B

TABLE J14-4 Required Word Sequences For Example J14.2 Messages Requiring More Than Three Words)
(Sheet 4 of 7)

Serial	Type of Transmission	Limit of 3 Words Per Time Slot	More Than 3 Words Available Per Time Slot (Maximum 6)
17	EWAC=4. Search for emitters with the specified function and frequency/range, within the defined AOP.	J14.2I/J14.2E0/J14.2C2, followed by a J14.2I/J14.2C3/J14.2C4 sequence.	J14.2I/J14.2E0/J14.2C2/J14.2C3/J14.2C4
18	EWAC=4. Search for emitters with the specified function and PRF/PRI, within the defined sector.	J14.2I/J14.2C1/J14.2C3, followed by a J14.2I/J14.2C8 sequence.	J14.2I/J14.2C1/J14.2C3/J14.2C8
19	EWAC=4. Search for emitters with the specified function and PRF/PRI, within the defined AOP.	J14.2I/J14.2E0/J14.2C2, followed by a J14.2I/J14.2C3/J14.2C8 sequence.	J14.2I/J14.2E0/J14.2C2/J14.2C3/J14.2C8
20	EWAC=4. Search for emitters with the specified function, associated with the specified platform type and/or nationality/alliance, within the defined sector.	J14.2I/J14.2C1/J14.2C3, followed by a J14.2I/J14.2C5 sequence.	J14.2I/J14.2C1/J14.2C3/J14.2C5
21	EWAC=4. Search for emitters with the specified function, associated with the specified platform type and/or nationality/alliance, within the defined AOP.	J14.2I/J14.2E0/J14.2C2, followed by a J14.2I/J14.2C3/J14.2C5 sequence.	J14.2I/J14.2E0/J14.2C2/J14.2C3/J14.2C5
22	EWAC=4. Search for emitters with the specified frequency/ range and PRF/PRI, within the defined sector.	J14.2I/J14.2C1/J14.2C4, followed by a J14.2I/J14.2C8 sequence.	J14.2I/J14.2C1/J14.2C4/J14.2C8
23	EWAC=4. Search for emitters with the specified frequency/ range and PRF/PRI, within the defined AOP.	J14.2I/J14.2E0/J14.2C2, followed by a J14.2I/J14.2C4/J14.2C8 sequence.	J14.2I/J14.2E0/J14.2C2/J14.2C4/J14.2C8

5.3.439

MIL-STD-6016B

TABLE J14-4 Required Word Sequences For Example J14.2 Messages Requiring More Than Three Words
(Sheet 5 of 7)

Serial	Type of Transmission	Limit of 3 Words Per Time Slot	More Than 3 Words Available Per Time Slot (Maximum 6)
24	EWAC=4. Search for emitters with the specified frequency/ range and associated with the specified platform type and/or nationality/alliance, within the defined sector.	J14.2I/J14.2C1/J14.2C4, followed by a J14.2I/J14.2C5 sequence.	J14.2I/J14.2C1/J14.2C4/J14.2C5
25	EWAC=4. Search for emitters with the specified frequency/ range and associated with the specified platform type and/or nationality/alliance, within the defined AOP.	J14.2I/J14.2E0/J14.2C2, followed by a J14.2I/J14.2C4/J14.2C5 sequence.	J14.2I/J14.2E0/J14.2C2/J14.2C4/J14.2C5
26	EWAC=4. Search for emitters with the specified PRF/PRI and associated with the specified platform type and/or nationality/alliance, within the defined sector.	J14.2I/J14.2C1/J14.2C5, followed by a J14.2I/J14.2C8 sequence.	J14.2I/J14.2C1/J14.2C5/J14.2C8
27	EWAC=4. Search for emitters with the specified PRF/PRI and associated with the specified platform type and/or nationality/alliance, within the defined AOP.	J14.2I/J14.2E0/J14.2C2, followed by a J14.2I/J14.2C5/J14.2C8 sequence.	J14.2I/J14.2E0/J14.2C2/J14.2C5/J14.2C8
28	EWAC=13. Evaluate the defined sector for jamming emanating from an emitter specified in the Emitter Number field.	J14.2I/J14.2E0/J14.2C1, followed by a J14.2I/J14.2C3 sequence.	J14.2I/J14.2E0/J14.2C1/J14.2C3
29	EWAC=13. Evaluate the defined sector for jamming on the specified frequency/range.	J14.2I/J14.2E0/J14.2C1, followed by a J14.2I/J14.2C4 sequence.	J14.2I/J14.2E0/J14.2C1/J14.2C4

TABLE J14-4 Required Word Sequences For Example J14.2 Messages Requiring More Than Three Words
(Sheet 6 of 7)

Serial	Type of Transmission	Limit of 3 Words Per Time Slot	More Than 3 Words Available Per Time Slot (Maximum 6)
30	EWAC=13. Evaluate the defined sector for jamming on the specified frequency/range and with the specified PRF/PRI.	J14.2I/J14.2E0/J14.2C1, followed by a J14.2I/J14.2C4/J14.2C8 sequence.	J14.2I/J14.2E0/J14.2C1/J14.2C4/J14.2C8
31	EWAC=14. Evaluate the defined sector for jamming emanating from an emitter specified in the Emitter Number field.	J14.2I/J14.2E0/J14.2C1, followed by a J14.2I/J14.2C3 sequence.	J14.2I/J14.2E0/J14.2C1/J14.2C3
32	EWAC=14. Evaluate the defined sector for jamming on the specified frequency/range.	J14.2I/J14.2E0/J14.2C1, followed by a J14.2I/J14.2C4 sequence.	J14.2I/J14.2E0/J14.2C1/J14.2C4
33	EWAC=14. Evaluate the defined sector for jamming on the specified frequency/range and with the specified PRF/PRI.	J14.2I/J14.2E0/J14.2C1, followed by a J14.2I/J14.2C4/J14.2C8 sequence.	J14.2I/J14.2E0/J14.2C1/J14.2C4/J14.2C8
34	EWAC=17. Jam the specified emitter(s) within the defined area.	J14.2I/J14.2E0/J14.2C2, followed by a J14.2I/J14.2C3 sequence.	J14.2I/J14.2E0/J14.2C2/J14.2C3
35	EWAC=17. Jam the specified frequency/range within the defined area.	J14.2I/J14.2E0/J14.2C2, followed by a J14.2I/J14.2C4 sequence.	J14.2I/J14.2E0/J14.2C2/J14.2C4
36	EWAC=17. Jam the threat(s) specified by platform type and/or nationality alliance, or Local Discrete Identifier, within the defined area.	J14.2I/J14.2E0/J14.2C2, followed by a J14.2I/J14.2C5 sequence.	J14.2I/J14.2E0/J14.2C2/J14.2C5
37	EWAC=19. Deploy the decoys specified in the J14.2E0, on the specified frequency/range and at the defined position.	J14.2I/J14.2E0/J14.2C2, followed by a J14.2I/J14.2C4 sequence.	J14.2I/J14.2E0/J14.2C2/J14.2C4

5.3-441

MIL-STD-6016B

TABLE J14-4 Required Word Sequences For Example J14.2 Messages Requiring More Than Three Words
(Sheet 7 of 7)

Serial	Type of Transmission	Limit of 3 Words Per Time Slot	More Than 3 Words Available Per Time Slot (Maximum 6)
38	<u>EWAC=19</u> . Deploy the decoys specified in the J14.2E0, on the specified frequency/range and in the defined area.	J14.2I/J14.2E0/J14.2C2, followed by a J14.2I/J14.2C4 sequence.	J14.2I/J14.2E0/J14.2C2/J14.2C4
39	<u>EWAC=19</u> . Deploy the decoys specified in the J14.2E0, in the defined sector or corridor.	J14.2I/J14.2E0/J14.2C1, followed by a J14.2I/J14.2C2 sequence.	J14.2I/J14.2E0/J14.2C1/J14.2C2
40	<u>EWAC=19</u> . Deploy the decoys specified in the J14.2E0, on the specified frequency/range and in the defined sector or corridor.	J14.2I/J14.2E0/J14.2C1, followed by a J14.2I/J14.2C2/J14.2C4 sequence.	J14.2I/J14.2E0/J14.2C1/J14.2C2/J14.2C4

Note:

1. If more than 6 words are available per time slot, a single J14.2I/J14.2E0/J14.2C2/J14.2C3/J14.2C4/J14.2C5/J14.2C8 sequence may be transmitted.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J14.2I

WORD TITLE: ELECTRONIC WARFARE CONTROL/COORDINATION INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00						
TRACK NUMBER, ADDRESSEE												:	MESSAGE	:	SUBLABEL,	:							:	WORD	:					
												:	LENGTH	:	J-SERIES	:	LABEL, J-SERIES	:	FORMAT	:		:								
												:	INDICATOR	:		:						:		:						
15												:	3	:	3	:	5	:	2	:			:							
49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25						
TRACK NUMBER, REFERENCE																:	ELECTRONIC WARFARE	:												
																:	ACTION VALUE	:											---	
																:		:												
19																:	6	:												

WORD DESCRIPTION

WORD NUMBER: J14.2I

WORD TITLE: ELECTRONIC WARFARE CONTROL/COORDINATION INITIAL WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550 001		WORD FORMAT	0-	1 2	00
270 004		LABEL, J-SERIES	2-	6 5	01110
271 005		SUBLABEL, J-SERIES	7-	9 3	010
800 001		MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
769 006		TRACK NUMBER, ADDRESSEE	13-	27 15	
1803 001		ELECTRONIC WARFARE ACTION VALUE	28-	33 6	
769 002		TRACK NUMBER, REFERENCE	34-	52 19	
1816 001		TASK PRIORITY	53-	55 3	
1809 001		REQUEST NUMBER	56-	58 3	
1805 001		SECTOR/AREA/LOCATION INDICATOR (SAL IND)	59-	60 2	
392 008		RECEIPT/COMPLIANCE	61-	65 5	
444 025		RECURRENCE RATE, RECEIPT/ COMPLIANCE (RRN R/C)	66-	69 4	

FIELD CODING FOR J14.2I

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	006	TRACK NUMBER, ADDRESSEE -----		THE TN OF A UNIT (I.E., JU OR PU) TO WHICH A MESSAGE IS ADDRESSED.
		NO STATEMENT NUMERIC	0	
		ILLEGAL NUMERIC	00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		NUMERIC	00077 (OCTAL)	
		NUMERIC	00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC	00177 (OCTAL)	COLLECTIVE ADDRESS.
		NUMERIC	00200 THROUGH 07776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL NUMERIC	07777 (OCTAL)	
			10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
1803	001	ELECTRONIC WARFARE ACTION VALUE -----		THIS FIELD DESCRIBES AN EW ACTION TO BE TAKEN OR DESCRIBES REPORTS THAT ARE THE RESULT OF PREVIOUS EW ACTIONS.
		REQUEST PERIODIC REPORT	0	PERIODICALLY REPORT THE TRACK DESIGNATED BY REFERENCE TN UNTIL THE REQUEST IS CANCELLED, THE CONTACT IS LOST, A "WATCH" REQUEST OR CEASE REPORT IS RECEIVED.
		REQUEST AUTOMATIC EVALUATION	1	REQUEST EVALUATION OF EMITTER NUMBER, EMITTER FUNCTION MODE NUMBER, AND EMITTER CONFIDENCE USING DESIGNATED PARAMETRIC DATA.
		REQUEST MANUAL EVALUATION	2	PERFORM AN EVALUATION ON THE TRACK DESIGNATED BY REFERENCE TN.
		REQUEST UPDATE AND WATCH	3	MAKE AN INITIAL EW REPORT ON THE TRACK DESIGNATED BY REFERENCE TN, THEN MONITOR THE TRACK AND REPORT ONLY TACTICALLY SIGNIFICANT CHANGES.

FIELD CODING FOR J14.2I

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1803	001	ELECTRONIC WARFARE ACTION VALUE -----	(CONTINUED)	
		REQUEST DIRECTED SEARCH	4	SEARCH DESIGNATED PARAMETERS AND REPORT RESULTS.
		CANCEL REQUEST	5	CANCEL REQUEST INDICATED BY REQUEST NUMBER AND REFERENCE EW ACTION VALUE.
		CEASE REPORT	6	CEASE REPORTING ON TRACK DESIGNATED BY REFERENCE TN AND REFERENCE EW ACTION VALUE, IF APPLICABLE.
		EMITTER EVALUATION	7	AN INITIAL EVALUATION, OR AN ALTERATION OF A PREVIOUS EMITTER NUMBER, EMITTER FUNCTION, MODE NUMBER, MODULATION CODE, WARTIME RESERVE MODE INDICATOR, AND/OR EMITTER CONFIDENCE OF REFERENCE TN.
		PARAMETER ASSOCIATION	8	THERE IS AN ASSOCIATION BETWEEN REFERENCE TN AND ASSOCIATED TN WITH SIMILAR PARAMETRIC INFORMATION, AND THE DETECTED EMISSIONS ARE DEEMED TO ORIGINATE FROM THE SAME EMITTER.
		EMITTER ASSOCIATION	9	THE EW INFORMATION IDENTIFIED BY REFERENCE TN AND ASSOCIATED TN ARE DEEMED TO BE COLLOCATED, I.E., EMANATING FROM THE SAME PLATFORM BUT NOT THE SAME EMITTER.
		DISASSOCIATION	10	DISASSOCIATE REFERENCE TN FROM ALL EXISTING PARAMETER AND/OR EMITTER ASSOCIATIONS, LEAVING THE REMAINDER OF ASSOCIATIONS INTACT.
		NO FIND	11	THIS RESPONSE TO A DIRECTED ACTION STATES THAT NO INFORMATION WAS FOUND, OR THAT CONTACT HAS BEEN LOST.
		RESPONSE TO AN ELECTRONIC WARFARE REQUEST	12	IDENTIFIES THE ACCOMPANYING REPORT AS A POSITIVE RESPONSE TO A DIRECTED ACTION.
		EVALUATE TRACK	13	EVALUATE THE SECTOR SPECIFIED IN THE SECTOR WIDTH FIELD AND REPORT EA INTERCEPTS FOR THE DURATION OF TIME SPECIFIED IN THE TIME DURATION FIELD. THE BEARING

FIELD CODING FOR J14.2I

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1803	001	ELECTRONIC WARFARE ACTION VALUE -----	(CONTINUED)	
		EVALUATE SECTOR	14	BETWEEN THE RECEIVING JU AND THE REFERENCE TN DEFINES THE CENTER OF THE SECTOR FOR WHICH EA INTERCEPTS ARE REQUESTED. THE RECEIVING JU IS THE SECTOR ORIGIN. EVALUATE THE SECTOR SPECIFIED IN THE SECTOR WIDTH FIELD AND REPORT EA INTERCEPTS FOR THE DURATION OF TIME SPECIFIED IN THE TIME DURATION FIELD. THE BEARING REPORTED IN THE BEARING FIELD DEFINES THE CENTER OF THE SECTOR FOR WHICH EA INTERCEPTS ARE REQUESTED. THE RECEIVING JU IS THE SECTOR ORIGIN.
		DIRECTION FINDER REQUEST	15	UNIT IS DIRECTED TO TAKE A BEARING ON A TRACK DESIGNATED BY REFERENCE TN AT A SPECIFIED TIME.
		PROTECT	16	FRIENDLY FREQUENCY USED FOR A PARTICULAR OPERATION THAT IS IDENTIFIED AND PROTECTED IN ORDER TO PREVENT IT FROM BEING INADVERTENTLY JAMMED BY FRIENDLY FORCES WHILE ACTIVE EW OPERATIONS ARE DIRECTED AGAINST HOSTILE FORCES.
		JAMMING REQUEST	17	JAMMING IS DESIRED AGAINST A SPECIFIED EMITTER, PLATFORM/SITE, CIRCUIT OR IN A SPECIFIC AREA.
		DISUSED	18	
		DEPLOY DECOYS	19	DECOY DEPLOYMENT DIRECTED. UTILIZE DECOY TYPE SPECIFIED.
		PARAMETRIC DATA UPDATE REQUEST	20	THE UNIT SPECIFIED IN THE ADDRESSEE TN IS REQUESTED TO TRANSMIT ALL AVAILABLE PARAMETRIC DATA.
		DISUSED	21	
		DISUSED	22	
		SET EMISSIONS CONTROL	23	SET EMCON SPECIFIED IN THE PLAN SOURCE AND PLAN NUMBER FIELDS.
		DISUSED	24	
		UNDEFINED	25	

5.3-448

MIL-STD-6016B

FIELD CODING FOR J14.2I

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1803	001	ELECTRONIC WARFARE ACTION VALUE -----	(CONTINUED)	
		TRACK NUMBER, REFERENCE/ INDEX NUMBER CORRELATION	26	INDICATES THAT THE REFERENCE TN AND THE INDEX NUMBER SPECIFIED ARE CORRELATED.
		UNDEFINED	27	
		DISUSED	28	
		DISUSED	29	
		GUARD	30	FREQUENCY THAT IS CURRENTLY BEING EXPLOITED FOR COMBAT INFORMATION AND INTELLIGENCE.
		TAB00	31	FREQUENCY OF SUCH IMPORTANCE THAT IT MUST NEVER BE DELIBERATELY JAMMED OR INTERFERED WITH BY FRIENDLY FORCES.
		UNDEFINED	32 THROUGH 63	
769	002	TRACK NUMBER, REFERENCE -----		A REFERENCE NUMBER USED TO ASSOCIATE INFORMATION AND DIRECTIVES WITH THE TRACK. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE- BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANNN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.

FIELD CODING FOR J14.2I (SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE	(CONTINUED)	

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6
00111	7
01000	A
01001	B
01010	C
01011	D
01100	E
01101	F
01110	G
01111	H
10000	J
10001	K
10010	L
10011	M
10100	N
10101	P
10110	Q
10111	R
11000	S
11001	T
11010	U
11011	V
11100	W
11101	X
11110	Y
11111	Z

00000	0	NO STATEMENT.
00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
00077	63	ILLEGAL.
00100-00175	64 THROUGH 125	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
00176	126	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
00177	127	COLLECTIVE ADDRESS.

FIELD CODING FOR J14.2I

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		00200-07776	128 THROUGH 4094	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		07777 0A000-0Z777	4095 4096 THROUGH 16383	ILLEGAL. ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		10000-17777	16384 THROUGH 20479	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		20000-27777	32768 THROUGH 36863	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE

5.3-451

MIL-STD-6016B

FIELD CODING FOR J14.2I

(SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	002	TRACK NUMBER, REFERENCE -----	(CONTINUED)	
		50000-57777	81920 THROUGH 86015	USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		70000-77776	114688 THROUGH 118782	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		7A000-ZZ777	118784 THROUGH 524287	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
1816	001	TASK PRIORITY -----		ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		NO STATEMENT	0	THE PRIORITY ASSIGNED TO THE ACTION SPECIFIED IN THE EW ACTION VALUE FIELD.
		1ST PRIORITY/CRITICAL	1	
		2ND PRIORITY/URGENT	2	
		3RD PRIORITY	3	
		UNDEFINED	4 THROUGH 6	
		NOT TO INTERFERE BASIS	7	

5.3-452

MIL-STD-6016B

FIELD CODING FOR J14.2I

(SHEET 8)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1809	001	REQUEST NUMBER -----		PROVIDES AN AUDIT TRAIL FOR RESPONSES TO REQUESTS.
		NO STATEMENT	0	
		NUMERIC	1 THROUGH 7	
1805	001	SECTOR/AREA/LOCATION INDICATOR -----		INDICATES WHETHER THE REFERENCE TN IN THE MESSAGE IS A SECTOR, AREA OF PROBABILITY, OR LOCATION.
		NO STATEMENT	0	
		SECTOR	1	
		AREA OF PROBABILITY	2	
		LOCATION	3	LATITUDE/LONGITUDE.
392	008	RECEIPT/COMPLIANCE -----		
		ORIGINAL ORDER	0	RECEIPT/COMPLIANCE RESPONSE REQUIRED.
		ORIGINAL ORDER	1	RECEIPT/COMPLIANCE RESPONSE NOT REQUIRED. MUST BE USED IN CONJUNCTION WITH ORIGINAL ORDER MESSAGES ADDRESSED TO COLLECTIVE ADDRESSES. THE ORIGINAL ORDER SHALL BE TRANSMITTED 3 TIMES. MESSAGE RECEIVED ERROR FREE.
		MACHINE RECEIPT	2	THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER WILL COMPLY. IN THIS USAGE, THE SYSTEM COMPONENT IS A HUMAN OPERATOR OR (UNMANNED VEHICLE ONLY) A MACHINE.
		WILCO (WILL COMPLY)	3	THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER HAS COMPLIED. IN THIS USAGE, THE SYSTEM COMPONENT MAY BE A HUMAN OPERATOR OR A MACHINE.
		HAVCO (HAVE COMPLIED)	4	RECEIPT/COMPLIANCE RESPONSE (MR AND/ OR CANTPRO ONLY) REQUIRED.
		ORIGINAL ORDER	5	THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER CANNOT COMPLY. IN THIS USAGE, THE SYSTEM COMPONENT IS A HUMAN OPERATOR OR (UNMANNED VEHICLE ONLY) A MACHINE.
		CANTCO (CANNOT COMPLY)	6	NON-SPECIFIC SYSTEM LIMITATION OR CONFLICT. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND
		CANTPRO (CANNOT PROCESS)	7	

5.3-453

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
		CANTPRO (CANNOT PROCESS)	8	THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	9	TIME SLOT ASSIGNMENT CONFLICT DETECTED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	10	CRYPTOVARIABLE NOT HELD. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	11	PARTICIPATION GROUP NOT DEFINED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	12	APPLICABLE ASSIGNMENT TABLE FULL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	13	RELAY FUNCTION SPECIFIED ALREADY HAS ASSIGNED TIME SLOT BLOCKS FOR WHICH A DIFFERENT RELAY MODE/NET NUMBER HAS BEEN SPECIFIED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
				INTERFERENCE PROTECTION FEATURES WOULD BE VIOLATED BY ACCEPTANCE OF ASSIGNMENT. THIS IS AN AUTOMATIC

5.3-454

MIL-STD-6016B

FIELD CODING FOR J14.2I

(SHEET 10)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
-----	-----	-----------------------------	-------------	--

		CANTPRO (CANNOT PROCESS)	14	
--	--	--------------------------	----	--

COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.

HOST SUBSCRIBER INTERFACE IS INACTIVE AND MESSAGE IS NOT PROCESSED BY THE TERMINAL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.

		CANTPRO (CANNOT PROCESS)	15	
--	--	--------------------------	----	--

TN, ADDRESSEE DOES NOT IMPLEMENT THE ACTION REQUESTED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.

		CANTPRO (CANNOT PROCESS)	16	
--	--	--------------------------	----	--

ONE OR MORE TNS IN THE OM NOT HELD. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.

		CANTPRO (CANNOT PROCESS)	17	
--	--	--------------------------	----	--

TN, REFERENCE OR TN, FRIENDLY WEAPON IS UNDER OWN UNIT CONTROL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.

		CANTPRO (CANNOT PROCESS)	18	
--	--	--------------------------	----	--

UNIT NOT EXERCISING AIR CONTROL CAPABILITY. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.

		CANTPRO (CANNOT PROCESS)	19	
--	--	--------------------------	----	--

UNACCEPTABLE IDENTITY. THIS IS AN AUTOMATIC COMPUTER-GENERATED

5.3-455

MIL-STD-6016B

FIELD CODING FOR J14.2I

(SHEET 11)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
		CANTPRO (CANNOT PROCESS)	20	RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	21	ADDRESSEE TN IS INACTIVE. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	22	THE FORWARDING UNIT DID NOT RECEIVE A MACHINE RECEIPT FROM THE ADDRESSEE TN. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		UNDEFINED NO STATEMENT	23 THROUGH 30 31	TN, REFERENCE OR TN, FRIENDLY WEAPON IS NOT UNDER THIS UNIT'S CONTROL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
444	025	RECURRENCE RATE, RECEIPT/ COMPLIANCE -----		IDENTIFIES THE TIME SLOT IN WHICH THE RECEIPT/COMPLIANCE FOR THE MESSAGE IS TO BE TRANSMITTED.
		NO STATEMENT	0	
		NUMERIC	1 THROUGH 15	THE NUMERIC VALUE FOR RECEIPT/ COMPLIANCE, SPECIFIED AS RECURRENCE RATE NUMBER, DEFINES THE NUMBER N OF CONSECUTIVE TIME SLOTS FROM THE ORIGINAL TRANSMISSION TO THE DONATED TIME SLOT: N=3X2 TO THE (15-RRN) POWER.

5.3-456

MIL-STD-6016B

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: ELECTRONIC WARFARE CONTROL/COORDINATION EXTENSION WORD

24:	23	22	21	20:	19	18	17	16	15	14:	13	12	11	10	09:	08	07	06	05	04	03:	02:	01	00:
<---	:	TIME	DURATION	:		SECOND		:		HOUR		:		MINUTE		:					IMM:	WORD	:	
	:			:				:				:				:					ACT:	FORMAT	:	
	:			:				:				:				:								
:		4		:		6		:		5		:		6		:					1	:	2	:

	49	:	48	47	46	45	44	43	:	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25			
	:	REFERENCE ELECTRONIC																		:										
<---	:	WARFARE ACTION VALUE																		:	TRACK NUMBER, ASSOCIATED									
	:																			:										
	:	6																		:	19									

:	69:	68	67:	66	65:	64:	63	62	61:	60	59	58	57	56	55:	54	53	52:	51	50
:	AUT:	SQUARE/:			:	EWC:	PERIODICITY:				:				:	DECOY	:	DECOY		
:	NEG:	CIRCLE	:	SP	:	IND:	OF REPORT	:			INDEX	NUMBER	:		:	MISSION	:	TYPE		
:	:	SWITCH	:		:	:	:	:							:			:		
:	1	:	2	:	2	:	1	:	3	:			6	:		3	:	3		

5.3-458

MIL-STD-6016B

WORD DESCRIPTION

WORD NUMBER: J14.2E0

WORD TITLE: ELECTRONIC WARFARE CONTROL/COORDINATION EXTENSION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550 001		WORD FORMAT	0-	1 2	10
1839 001		IMMEDIATE ACTION INDICATOR (IMM ACT)	2	1	
797 004		MINUTE	3-	8 6	
792 001		HOUR	9-	13 5	
380 001		SECOND	14-	19 6	
1840 001		TIME DURATION	20-	23 4	
769 008		TRACK NUMBER, ASSOCIATED	24-	42 19	
1803 003		REFERENCE ELECTRONIC WARFARE ACTION VALUE	43-	48 6	
1848 001		DECOY TYPE (DCY TYP)	49-	51 3	
1847 001		DECOY MISSION	52-	54 3	
768 002		INDEX NUMBER	55-	60 6	
1808 001		PERIODICITY OF REPORT	61-	63 3	
368 001		ELECTRONIC WARFARE COORDINATOR INDICATOR (EWC IND)	64	1	
756 002		SPARE (SP)	65-	66 2	
351 009		SQUARE/CIRCLE SWITCH (S/C SW)	67-	68 2	
1833 001		AUTOMATIC ELECTRONIC ATTACK NEGATION (AUT NEG)	69	1	

FIELD CODING FOR J14.2E0

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1839	001	IMMEDIATE ACTION INDICATOR ----- NO STATEMENT IMMEDIATE ACTION IS REQUIRED	0 1	INDICATES WHETHER IMMEDIATE ACTION IS REQUIRED.
797	004	MINUTE ----- 0 THROUGH 59 ILLEGAL NO STATEMENT	0 THROUGH 59 60 THROUGH 62 63	THE MINUTE OF THE HOUR. IN ONE MINUTE INCREMENTS.
792	001	HOUR ---- 0 HOUR 1 THROUGH 23 HOURS ILLEGAL NO STATEMENT	0 1 THROUGH 23 24 THROUGH 30 31	EXPRESSES TIME OF DAY OR A PERIOD OF TIME IN HOURS. IN ONE HOUR INCREMENTS.
380	001	SECOND ----- 0 THROUGH 59 ILLEGAL NO STATEMENT	0 THROUGH 59 60 THROUGH 62 63	THE SECOND OF THE MINUTE. IN ONE SECOND INCREMENTS.
1840	001	TIME DURATION ----- NO STATEMENT 1 SECOND 2 SECONDS 3 SECONDS 4 SECONDS 5 SECONDS 10 SECONDS 15 SECONDS 20 SECONDS 25 SECONDS 30 SECONDS UNDEFINED 1 MINUTE 5 MINUTES 20 MINUTES 30 MINUTES	0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15	INDICATES THE LENGTH OF TIME THE ACTION IS TO BE PERFORMED.

5.3-460

MIL-STD-6016B

FIELD CODING FOR J14.2E0 (SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	008	TRACK NUMBER, ASSOCIATED -----		THE TN OF AN ENTITY THAT IS ASSOCIATED WITH THE SUBJECT TN OF THE MESSAGE. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE-BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANNN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6
00111	7
01000	A
01001	B
01010	C
01011	D
01100	E
01101	F
01110	G
01111	H

FIELD CODING FOR J14.2E0

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	008	TRACK NUMBER, ASSOCIATED -----	(CONTINUED)	
				10000 J
				10001 K
				10010 L
				10011 M
				10100 N
				10101 P
				10110 Q
				10111 R
				11000 S
				11001 T
				11010 U
				11011 V
				11100 W
				11101 X
				11110 Y
				11111 Z
		00000	0	NO STATEMENT.
		00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU). ILLEGAL.
		00077	63	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU). RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		00100-00175	64 THROUGH 125	COLLECTIVE ADDRESS.
		00176	126	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		00177	127	ILLEGAL.
		00200-07776	128 THROUGH 4094	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		07777	4095	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		0A000-0Z777	4096 THROUGH 16383	ILLEGAL.
		10000-17777	16384 THROUGH 20479	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
				ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND

5.3-462

MIL-STD-6016B

FIELD CODING FOR J14.2E0

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	008	TRACK NUMBER, ASSOCIATED -----	(CONTINUED)	
		20000-27777	32768 THROUGH 36863	REFERENCE POINTS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE

5.3-463

MIL-STD-6016B

FIELD CODING FOR J14.2E0

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	008	TRACK NUMBER, ASSOCIATED -----	(CONTINUED)	
		70000-77776	114688 THROUGH 118782	USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
1803	003	REFERENCE ELECTRONIC WARFARE ACTION VALUE -----		THIS FIELD SPECIFIES THE EW ACTION VALUE OF A PREVIOUS MESSAGE REFERENCED IN THIS MESSAGE.
		REQUEST PERIODIC REPORT	0	
		REQUEST AUTOMATIC EVALUATION	1	
		REQUEST MANUAL EVALUATION	2	
		REQUEST UPDATE AND WATCH	3	
		REQUEST DIRECTED SEARCH	4	
		CANCEL REQUEST	5	
		CEASE REPORT	6	
		EMITTER EVALUATION	7	
		PARAMETER ASSOCIATION	8	
		EMITTER ASSOCIATION	9	
		DISASSOCIATION	10	
		NO FIND	11	
		RESPONSE TO AN ELECTRONIC WARFARE REQUEST	12	
		EVALUATE TRACK	13	
		EVALUATE SECTOR	14	
		DIRECTION FINDER REQUEST	15	
		PROTECT	16	
		JAMMING REQUEST	17	
		DISUSED	18	
		DEPLOY DECOYS	19	

FIELD CODING FOR J14.2E0

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1803	003	REFERENCE ELECTRONIC WARFARE ACTION VALUE -----	(CONTINUED)	
		PARAMETRIC DATA UPDATE REQUEST	20	
		DISUSED	21	
		DISUSED	22	
		SET EMISSIONS CONTROL	23	
		DISUSED	24	
		UNDEFINED	25	
		TRACK NUMBER, REFERENCE/ INDEX NUMBER CORRELATION	26	
		UNDEFINED	27	
		DISUSED	28	
		DISUSED	29	
		GUARD	30	
		TABOO	31	
		UNDEFINED	32 THROUGH 62	
		NO STATEMENT	63	
1848	001	DECOY TYPE -----		SPECIFIES THE TYPE OF DECOY.
		NO STATEMENT	0	
		ACTIVE ELECTRONIC DECOY	1	
		CHAFF	2	
		INFRARED	3	
		ELECTRO-OPTICAL	4	
		CORNER REFLECTOR	5	
		UNDEFINED	6 THROUGH 7	
1847	001	DECOY MISSION -----		DECOY MISSION IS TO BE USED WITH DECOY TYPE TO SPECIFY THE MISSION OF DECOY TYPE INDICATED.
		NO STATEMENT	0	
		SEDUCTION	1	TRANSFER MISSILE HOMING HEAD LOCK-ON FROM THE TARGET.
		CONFUSION	2	DELAY TARGET SELECTION BY THE SEARCH AND ACQUISITION RADAR.
		DISTRACTION	3	DECEIVE THE INITIAL LOCK-ON BY THE MISSILE.
		UNDEFINED	4 THROUGH 7	
768	002	INDEX NUMBER -----		

5.3-465

MIL-STD-6016B

FIELD CODING FOR J14.2E0

(SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
768	002	INDEX NUMBER ----- NO STATEMENT NUMERIC	(CONTINUED) 0 1 THROUGH 63	 A VALUE ASSIGNED BY THE ORIGINATOR TO DIFFERENTIATE AMONG SENSOR TARGET REPORTS.
1808	001	PERIODICITY OF REPORT ----- NO STATEMENT UPON DETECTION, ONCE UPON DETECTION, AND 1 MINUTE INTERVALS UPON DETECTION, 5 MINUTE INTERVALS UPON DETECTION, 15 MINUTE INTERVALS UPON DETECTION, HOURLY INTERVALS UPON DETECTION AND IN ACCORDANCE WITH NORMAL TRANSMIT RULES THEREAFTER UNDEFINED	 0 1 2 3 4 5 6 7	 THE RATE AT WHICH REQUESTED REPORTS ARE TO BE SENT.
368	001	ELECTRONIC WARFARE COORDINATOR INDICATOR ----- ORIGINATED BY OTHER THAN EWC ORIGINATED BY EWC	 0 1	 INDICATES WHETHER THE MESSAGE WAS ORIGINATED BY THE ELECTRONIC WARFARE COORDINATOR (EWC) OR BY A UNIT OTHER THAN THE EWC.
351	009	SQUARE/CIRCLE SWITCH ----- NO STATEMENT SQUARE/RECTANGULAR CIRCULAR/ELLIPTICAL	 0 1 2	 USED IN CONJUNCTION WITH THE LATITUDE, LONGITUDE, AREA MAJOR AXIS, AREA MINOR AXIS, AND AXIS ORIENTATION FIELDS TO DESCRIBE AN AREA. IF AREA MAJOR AND AREA MINOR AXES ARE EQUAL THE AREA DESCRIBED IS A SQUARE. IF THE AXES ARE NOT EQUAL THE AREA DESCRIBED IS A RECTANGLE. IF AREA MAJOR AND AREA MINOR AXES ARE EQUAL THE AREA DESCRIBED IS A

5.3-466

MIL-STD-6016B

FIELD CODING FOR J14.2E0 (SHEET 8)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
351	009	SQUARE/CIRCLE SWITCH -----	(CONTINUED)	
		UNDEFINED	3	CIRCLE. IF THE AXES ARE NOT EQUAL THE AREA IS AN ELLIPSE.
1833	001	AUTOMATIC ELECTRONIC ATTACK NEGATION -----		
		NO STATEMENT	0	
		BREAK ENGAGE	1	

.....

WORD TITLE: ELECTRONIC WARFARE CONTROL/COORDINATION CONTINUATION WORD 1

<---	:	:	:	:
	:	BEARING	:	CONTINUATION WORD : WORD :
	:		:	LABEL :FORMAT :

	:	12	:	5 : 2 :

<---	:	:	:BNG:	:
	:	SECTOR WIDTH	:ORG:	TRACK NUMBER, ORIGIN
	:	:	:	:

	:	8	: 1 :	19

SPARE	ELEVATION ANGLE
13	10

WORD DESCRIPTION

WORD NUMBER: J14.2C1

WORD TITLE: ELECTRONIC WARFARE CONTROL/COORDINATION CONTINUATION WORD 1

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	00001
372 007	BEARING	7-	18 12	
769 009	TRACK NUMBER, ORIGIN	19-	37 19	
1811 001	BEARING ORIGIN (BNG ORG)	38	1	
1804 001	SECTOR WIDTH	39-	46 8	
428 002	ELEVATION ANGLE	47-	56 10	
756 013	SPARE	57-	69 13	

FIELD CODING FOR J14.2C1 (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
372	007	BEARING ----- 0 THROUGH 359 3736/4096 0 THROUGH 4095 DEGREES		BEARING IS REFERENCED TO TRUE NORTH. IN 360/4096 DEGREE INCREMENTS.
769	009	TRACK NUMBER, ORIGIN -----		

THE TN IDENTIFYING THE LOCATION OF THE REPORTED BEARING'S ORIGIN, E.G., A UNIT'S LOCATION, OTHER TRACK, OR A POINT. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE-BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANNN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6
00111	7
01000	A
01001	B

FIELD CODING FOR J14.2C1 (SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	009	TRACK NUMBER, ORIGIN -----	(CONTINUED)	
				01010 C
				01011 D
				01100 E
				01101 F
				01110 G
				01111 H
				10000 J
				10001 K
				10010 L
				10011 M
				10100 N
				10101 P
				10110 Q
				10111 R
				11000 S
				11001 T
				11010 U
				11011 V
				11100 W
				11101 X
				11110 Y
				11111 Z
		00000	0	NO STATEMENT.
		00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		00077	63	ILLEGAL.
		00100-00175	64 THROUGH 125	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		00176	126	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		00177	127	COLLECTIVE ADDRESS.
		00200-07776	128 THROUGH 4094	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		07777	4095	ILLEGAL.
		0A000-0Z777	4096 THROUGH 16383	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		10000-17777	16384 THROUGH 20479	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO

FIELD CODING FOR J14.2C1

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	009	TRACK NUMBER, ORIGIN -----	(CONTINUED)	
		1A000-1Z777	20480 THROUGH 32767	C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS. ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		20000-27777	32768 THROUGH 36863	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.

5.3-472

MIL-STD-6016B

FIELD CODING FOR J14.2C1

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	009	TRACK NUMBER, ORIGIN ----- 60000-67777 6A000-6Z777 70000-77776 77777 7A000-ZZ777	(CONTINUED) 98304 THROUGH 102399 102400 THROUGH 114687 114688 THROUGH 118782 118783 118784 THROUGH 524287	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS. ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS. ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS. ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
1811	001	BEARING ORIGIN ----- TRACK NUMBER ORIGIN LATITUDE/LONGITUDE	0 1	SPECIFIES THE ORIGIN OF THE BEARING. THE ORIGIN OF THE BEARING IS FROM THE LOCATION OF THE ORIGIN TN. THE ORIGIN OF THE BEARING IS FROM THE LOCATION SPECIFIED IN THE LATITUDE AND LONGITUDE FIELDS.
1804	001	SECTOR WIDTH ----- 0 THROUGH 180 DEGREES ILLEGAL NO STATEMENT	0 THROUGH 180 181 THROUGH 254 255	THE NUMBER OF DEGREES ON EACH SIDE OF THE SPECIFIED BEARING, TO THE NEAREST WHOLE DEGREE. IN ONE DEGREE INCREMENTS.
428	002	ELEVATION ANGLE -----		EXPRESSES ANGULAR ELEVATION MEASURED FROM THE HORIZONTAL. ABOVE HORI- ZONTAL ANGLES ARE POSITIVE. BELOW HORIZONTAL ANGLES ARE NEGATIVE. EXPRESSES ANGULAR ELEVATION IN UNITS OF 1/2048 OF A CIRCLE MEASURED FROM THE HORIZONTAL. ANGULAR

5.3-473

MIL-STD-6016B

FIELD CODING FOR J14.2C1 (SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
428	002	ELEVATION ANGLE -----	(CONTINUED)	
		0 THROUGH 511 PI/1024 RADIANS	0 THROUGH 511	ELEVATIONS ABOVE THE HORIZONTAL ARE POSITIVE. ANGULAR ELEVATIONS BELOW THE HORIZONTAL ARE NEGATIVE. BIT CODES ARE IN TWOS COMPLEMENT CODING. IN PI/1024 RADIAN INCREMENTS.
		NO STATEMENT	512	
		-511 PI/1024 THROUGH -PI/1024 RADIANS	513 THROUGH 1023	IN PI/1024 RADIAN INCREMENTS.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: ELECTRONIC WARFARE CONTROL/COORDINATION CONTINUATION WORD 2

[illegible]

:	69	68	67	66	65	64	63	62:	61	60	59	58	57	56:	55	54	53	52	51	50:			
:	AXIS ORIENTATION								:	AREA MINOR AXIS						:	AREA MAJOR AXIS						:
:	8								:	6						:	6						:

WORD DESCRIPTION

WORD NUMBER: J14.2C2

WORD TITLE: ELECTRONIC WARFARE CONTROL/COORDINATION CONTINUATION WORD 2

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT #		RESOLUTION, CODING, ETC
			POSITION	BITS	
1550 001		WORD FORMAT	0-	1 2	01
1551 001		CONTINUATION WORD LABEL	2-	6 5	00010
281 014		LATITUDE, 0.0051 MINUTE	7-	27 21	
282 014		LONGITUDE, 0.0051 MINUTE	28-	49 22	
419 003		AREA MAJOR AXIS	50-	55 6	
419 004		AREA MINOR AXIS	56-	61 6	
1806 001		AXIS ORIENTATION	62-	69 8	

FIELD CODING FOR J14.2C2

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
281	014	LATITUDE, 0.0051 MINUTE -----		THE PRECISION IS APPROXIMATELY 31 FEET. IN 90/1,048,575 DEGREE INCREMENTS.
		0 DEGREES	0	
		+90/1,048,575 THROUGH +90 DEGREES NORTH	1 THROUGH 1048575	
		NO STATEMENT	1048576	
		-90 THROUGH -90/1,048,575 DEGREES SOUTH	1048577 THROUGH 2097151	
282	014	LONGITUDE, 0.0051 MINUTE -----		THE PRECISION IS APPROXIMATELY 31 FEET. IN 180/2,097,151 DEGREE INCREMENTS.
		0 DEGREES	0	
		+180/2,097,151 THROUGH +180 DEGREES EAST	1 THROUGH 2097151	
		NO STATEMENT	2097152	
		-180 THROUGH -180/2,097,151 DEGREES WEST	2097153 THROUGH 4194303	
419	003	AREA MAJOR AXIS -----		THIS FIELD IS USED IN CONJUNCTION WITH THE SQUARE/CIRCLE SWITCH, AREA MINOR AXIS, AXIS ORIENTATION, LATITUDE AND LONGITUDE TO DESCRIBE THE AREA OF A CIRCLE, ELLIPSE, SQUARE OR RECTANGLE. THE LENGTH EXPRESSED IN THIS FIELD IS DOUBLED AND CENTERED ON THE POSITION DESCRIBED BY THE LATITUDE AND LONGITUDE. IN FOUR DATA MILE INCREMENTS.
		0 THROUGH 244 DATA MILES	0 THROUGH 61	
		248 DATA MILES OR MORE	62	
		NO STATEMENT	63	
419	004	AREA MINOR AXIS -----		THIS FIELD IS USED IN CONJUNCTION WITH THE SQUARE/CIRCLE SWITCH, AREA MAJOR AXIS, AXIS ORIENTATION, LATITUDE AND LONGITUDE TO DESCRIBE THE AREA OF A CIRCLE, ELLIPSE, SQUARE OR RECTANGLE. THE AREA MINOR AXIS IS ALWAYS ORIENTED AT 90 DEGREES TO THE AREA MAJOR AXIS. THE LENGTH EXPRESSED IN THIS FIELD

FIELD CODING FOR J14.2C2 (SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
419	004	AREA MINOR AXIS -----	(CONTINUED)	
		0 THROUGH 244 DATA MILES 248 DATA MILES OR MORE NO STATEMENT	0 THROUGH 61 62 63	IS DOUBLED AND CENTERED ON THE POSITION DESCRIBED BY THE LATITUDE AND LONGITUDE. IN FOUR DATA MILE INCREMENTS.
1806	001	AXIS ORIENTATION -----		
		0 THROUGH 179 DEGREES ILLEGAL NO STATEMENT	0 THROUGH 179 180 THROUGH 254 255	THE AXIS ORIENTATION IS THE OFFSET FROM TRUE NORTH EXPRESSED IN ONE DEGREE INCREMENTS FROM ZERO TO 179 AND IS USED TO ORIENT THE AREA MA- JOR AXIS OF A CIRCLE, ELLIPSE, SQUARE, OR RECTANGLE. IN ONE DEGREE INCREMENTS.

WORD MAP

WORD NUMBER: J14.2C3

WORD TITLE: ELECTRONIC WARFARE CONTROL/COORDINATION CONTINUATION WORD 3

24	23	22	21	20	19	18	17	16	15	14:	13	12	11	10	09	08	07:	06	05	04	03	02:	01	00:		
EMITTER NUMBER										:	EMITTER FUNCTION							:	CONTINUATION WORD LABEL				:	WORD FORMAT	:	
16										:	7							:	5				:	2	:	
49	48	47:	46	45	44:	43:	42	41	40	39:	38	37	36	35	34	33:	32	31	30:	29	28	27	26	25		
<---		:	EMITTER CONFIDENCE		:	WTR:MDE		:	MODULATION CODE				:	MODE NUMBER				:	EMITTER NUMBER INDICATOR		:	---				
		:			:			:					:					:			:					
		:	3		:	1		:	4				:	6				:	3		:					
					:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50	
					:																				:	
					:	SPARE																			:	
					:																				:	
					:																				:	
					:	23																			:	

WORD DESCRIPTION

WORD NUMBER: J14.2C3

WORD TITLE: ELECTRONIC WARFARE CONTROL/COORDINATION CONTINUATION WORD 3

REFERENCE			BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS		RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1	2	01
1551 001	CONTINUATION WORD LABEL	2-	6	5	00011
1843 001	EMITTER FUNCTION	7-	13	7	
422 001	EMITTER NUMBER	14-	29	16	
266 001	EMITTER NUMBER INDICATOR	30-	32	3	
430 001	MODE NUMBER	33-	38	6	
1849 001	MODULATION CODE (MOD COD)	39-	42	4	
1821 001	WARTIME RESERVE MODE INDICATOR	43		1	
	(WTR MDE)				
431 003	EMITTER CONFIDENCE	44-	46	3	
756 023	SPARE	47-	69	23	

FIELD CODING FOR J14.2C3

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1843	001	EMITTER FUNCTION -----		THE REPRESENTATION OF THE FUNCTION OR ONE OF THE FUNCTIONS OF AN EMITTER.
		NO STATEMENT	0	
		AA, ANTI AIRCRAFT FIRE CONTROL	1	
		AB, AIRBORNE SEARCH AND BOMBING	2	
		AC, AIR SEARCH	3	
		AE, AIRBORNE EARLY WARNING	4	
		AF, AIRBORNE FIRE CONTROL	5	
		AG, AIRBORNE GUN LAYING (PLANE TO PLANE)	6	
		AI, AIRBORNE INTERCEPT	7	
		AL, ALTIMETER	8	
		AM, AIRBORNE RECON/ MAPPING	9	
		AQ, ACQUISITION	10	
		AR, AIRBORNE RANGE ONLY	11	
		AS, ATMOSPHERIC SOUNDING	12	
		AT, AIR TRAFFIC CONTROL	13	
		BC, BROADCAST	14	
		BM, BOMBING	15	
		BN, BEACON/TRANSPONDER	16	
		BO, BOMBING THROUGH OVERCAST	17	
		BS, BATTLEFIELD SURVEILLANCE	18	
		BT, BALLOON TRACKER	19	
		CA, CARRIER CONTROLLED APPROACH	20	
		CI, CARRIER CONTROL INTERCEPT	21	
		CM, COMMUNICATION	22	
		CR, COMMUNICATIONS RECEIVER	23	
		CS, COASTAL SURVEILLANCE	24	
		CT, COMMUNICATIONS TRANSMITTER	25	
		DC, DRONE CONTROL	26	
		DF, DIRECTION FINDING	27	
		DM, DISTANCE MEASURE	28	
		DT, DATA TRANSMISSION	29	

FIELD CODING FOR J14.2C3

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1843	001	EMITTER FUNCTION	(CONTINUED)	

		DU, DUMMY SITE	30	
		EA, ELECTRONIC ATTACK	31	
		ES, ELECTROMAGNETIC	32	
		SENSOR		
		ET, EARLY WARNING/	33	
		TARGET ACQUISITION		
		EW, EARLY WARNING	34	
		FC, FIRE CONTROL	35	
		FS, FREQUENCY STANDARD	36	
		GA, GROUND CONTROLLING	37	
		APPROACH		
		GB, GUN LAYING BEACON	38	
		GI, GROUND CONTROL	39	
		INTERCEPT		
		GL, GUN LAYING	40	
		GM, GUIDED MISSILE	41	
		GP, GLIDE PATH	42	
		GS, GROUND SPEED	43	
		INDICATOR		
		GU, GUIDANCE	44	
		GX, GROUND CONTROLLED	45	
		APPROACH SURVEILLANCE		
		HF, HEIGHT FINDING	46	
		HS, HARBOR SURVEILLANCE	47	
		ID, INTRUSION DETECTOR	48	
		SYSTEM		
		IF, IFF	49	
		IL, INSTRUMENT LANDING	50	
		SYSTEM		
		IM, ILLUMINATOR	51	
		IS, IONOSPHERIC SOUNDING	52	
		JM, JAMMER	53	
		LA, LOW ANGLE FIRE	54	
		CONTROL GUN LAYING		
		LN, LORAN	55	
		LO, LOCALIZER	56	
		MA, MISSILE ACQUISITION	57	
		MB, MARKER BEACON	58	
		MC, MISSILE CONTROL	59	
		ME, METEOROLOGICAL	60	
		MG, MISSILE GUIDANCE	61	
		MH, MISSILE HOMER	62	

FIELD CODING FOR J14.2C3

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1843	001	EMITTER FUNCTION	(CONTINUED)	

		MP, MARSHALLING POINT	63	
		FOR NONCOMMUNICATIONS		
		EQUIPMENT		
		MR, MICROWAVE RELAY	64	
		MT, MISSILE TRACKING	65	
		NA, NAVIGATIONAL	66	
		NW, NAVIGATION/WEATHER	67	
		AVOIDANCE		
		PA, PRECISION APPROACH	68	
		PD, PASSIVE DETECTION	69	
		PE, PRECISION ELEVATION	70	
		RADAR		
		PI, PROJECTILE INTERCEPT	71	
		PL, PERSONNEL DETECTOR	72	
		PR, PASSIVE RANGING	73	
		PW, PROXIMITY WARNING	74	
		RADAR		
		RA, RADAR DATA	75	
		RD, RADAR DECOY	76	
		RI, RANGE INSTRUMENTA-	77	
		TION		
		RO, RANGE ONLY	78	
		RR, RADIO RELAY	79	
		RS, RADIO/RADARSONDE	80	
		SA, SATELLITE TRACKER	81	
		SB, SONOBUOY	82	
		SC, SATELLITE	83	
		COMMUNICATIONS		
		SE, SURFACE SEARCH/EARLY	84	
		WARNING		
		SF, SURFACE FIRE CONTROL	85	
		SH, SEARCH/HEIGHT FINDER	86	
		SL, SEARCHLIGHT CONTROL	87	
		SP, SPACE SURVEILLANCE	88	
		SR, SEARCH RADAR	89	
		SS, SURFACE SEARCH	90	
		ST, SHELL TRACKING	91	
		SV, SENSOR RELAY	92	
		SX, SIF TRANSPONDER	93	
		TA, TARGET ACQUISITION	94	
		TD, 3-D RADAR	95	
		TF, TAIL FIRE CONTROL	96	
		TM, TELEMETERING	97	

5.3-484

MIL-STD-6016B

FIELD CODING FOR J14.2C3 (SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1843	001	EMITTER FUNCTION -----	(CONTINUED)	
		TR, TRANSMITTER/ RECEIVER COMMUNICATION	98	
		TS, TROPO-SCATTER	99	
		TT, TARGET TRACKING	100	
		TV, TELEVISION	101	
		TW, TAIL WARNING	102	
		TY, TELETYPE	103	
		UN, UNKNOWN	104	
		VA, VIDEO DATA	105	
		VD, VEHICLE DETECTOR	106	
		VR, VIDEO REMOTING	107	
		VT, PROXIMITY FUSE	108	
		XP, EXPERIMENTAL/TRAINER	109	
		LS-LASER	110	
		UNDEFINED	111 THROUGH 127	
422	001	EMITTER NUMBER -----		IDENTIFIES A SPECIFIC EMITTER.
		----- FOR EMITTER NUMBER INDICATOR (EN=1) -----		
		NATO SPOT NUMBER ILLEGAL	000000 THROUGH 037777 (OCTAL) 040000 THROUGH 177777 (OCTAL)	THE NATO SPOT NUMBER USES 5 OCTAL DIGITS WITH A RANGE OF 0-37777.
266	001	EMITTER NUMBER INDICATOR -----		EMITTER NUMBER INDICATOR IS USED WITH THE EMITTER NUMBER FIELD TO INDICATE WHICH DATABASE THE EMITTER NUMBER IS ASSOCIATED WITH.
		DO NOT INTERPRET EMITTER NUMBER FIELD	0	
		INTERPRET EMITTER NUMBER FIELD AS NATO SPOT NUMBER	1	
		UNDEFINED	2 THROUGH 7	
430	001	MODE NUMBER -----		A TWO DIGIT NUMERIC INDEX SEQUEN- Tially ASSIGNED TO EACH MODE OF A GIVEN EMITTER. A MODE IS A GROUP

FIELD CODING FOR J14.2C3

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
430	001	MODE NUMBER -----	(CONTINUED)	
				OF RF PARAMETERS WHICH CHARACTER- IZE SEVERAL POSSIBLE OPERATING CONDITIONS OF A GIVEN EMITTER. MODE NUMBERS AMPLIFY THE EMITTER NUMBER FIELD. NOT ALL EMITTERS HAVE MODE NUMBERS.
		NO STATEMENT NUMERIC	0 1 THROUGH 63	
1849	001	MODULATION CODE -----		INDICATES THE TYPE OF SIGNAL MODULATION.
		NO STATEMENT AMPLITUDE MODULATED	0 1	INFORMATION IS ADDED TO A CARRIER FREQUENCY BY VARYING THE AMPLITUDE OF THE RF ENERGY.
		PULSED	2	RF ENERGY IS TURNED ON AND OFF TO PRODUCE A SERIES OF RF ENERGY PULSES.
		CONTINUOUS WAVE	3	SINE WAVE RF ENERGY THAT VARIES OVER A NARROW RANGE OF AMPLITUDE OR FREQUENCIES.
		PULSE MODULATED	4	RF ENERGY IS TURNED ON AND OFF AT DISCRETE INTERVALS TO PRODUCE A SERIES OF PULSES WITH DETERMINABLE PULSE AMPLITUDE, PULSE REPETITION INTERVAL, AND PULSE WIDTH.
		FREQUENCY MODULATED	5	INFORMATION IS ADDED TO A CARRIER WAVE BY VARYING THE CARRIER'S CENTER FREQUENCY.
		PHASE MODULATED	6	THE INFORMATION WAVE IS ADDED TO THE CARRIER FREQUENCY BY CHANGING THE PHASE RELATIONSHIP WITHIN THE CARRIER SINE WAVE.
		PULSE STAGGER	7	THE PULSE REPETITION INTERVAL OF A PULSE MODULATED SIGNAL CHANGES AT EACH OCCURRENCE OF THE MAIN-BANG OR SYNC PULSE IN DISCRETE STEPS.
		PULSE DOPPLER	8	PULSE MODULATED SIGNALS WITH A HIGH PRF ARE USED IN PRECISION RADAR APPLICATIONS. THE RADAR TARGET'S VELOCITY IS DETERMINED BY MEASURING CHANGES IN THE CENTER FREQUENCY OF THE ECHO PULSE WITH RELATION TO THE

FIELD CODING FOR J14.2C3

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1849	001	MODULATION CODE -----	(CONTINUED)	
		NOISE JAMMING	9	TRANSMITTED PULSE CENTER FREQUENCY. THE PULSES ARE USED TO DETERMINE TARGET RANGE. AN AM OR FM SIGNAL MODULATED WITH NOISE THAT IS USED TO REDUCE THE EFFECTIVENESS OF SIGNALS OPERATING IN THE SAME FREQUENCY RANGE AS THE NOISE SIGNAL.
		CODE MODULATION PULSE	10	SEQUENCES OF PULSES USED TO CONVEY INFORMATION EITHER IN THE FORM OF PULSE AMPLITUDE, PULSE WIDTH, PULSE GROUP, OR PULSE POSITION RELATIONSHIPS. MODULATION ON TOP OF THE PULSES USING FM, AM, OR PHASE MODULATION TECHNIQUES MAY ADD TO THE INFORMATION CONTENT OF PULSE MODULATION SIGNALS.
		TIME DIVISION	11	ALLOCATION OF SIGNAL FUNCTION IN RELATIONSHIP TO THE START TIME OF THE SIGNAL INFORMATION CYCLE PROVIDES A DIVISION OF INFORMATION TRANSMISSION TIME THAT ALLOWS DIFFERENT INFORMATION SOURCES TO SHARE A SINGLE RF CARRIER.
		UNDETERMINED	12	
		UNDEFINED	13 THROUGH 15	
1821	001	WARTIME RESERVE MODE INDICATOR -----		WARTIME RESERVE MODE INDICATOR IS TO BE USED WITH THE EMITTER NUMBER FIELD TO INDICATE WHICH MODE THE EMITTER IS OPERATING IN.
		NORMAL OPERATIONS	0	INDICATES THE EMITTER IS FUNCTIONING IN ITS NORMAL OPERATING MODE.
		WARTIME RESERVE MODE	1	INDICATES THE EMITTER IS FUNCTIONING IN ITS WARTIME RESERVE MODE. WARTIME RESERVE MODE IS: AN INTENTIONAL CHANGE IN OBSERVABLE ELECTRO-MAGNETIC EMITTER PARAMETER OR OPERATIONAL PROCEDURE INTENDED TO REDUCE THE EFFECTIVENESS OF EW EQUIPMENT OR OTHER DETECTION, CLASSIFICATION, AND SUPPORT ACTIVITIES OF OPPOSING FORCES.

5.3-487

MIL-STD-6016B

FIELD CODING FOR J14.2C3

(SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

1821	001	WARTIME RESERVE MODE INDICATOR (CONTINUED)		
------	-----	--	--	--

THESE MODES ARE DELIBERATELY HELD IN RESERVE FOR WARTIME EMERGENCY USE AND ARE SELDOM, IF EVER, INTERCEPTED OR OBSERVED PRIOR TO THE EMERGENCY. ALSO CALLED WARM.

431	003	EMITTER CONFIDENCE		
-----	-----	--------------------	--	--

THE CONFIDENCE IS COMPUTED ON THE BASIS OF THE NUMBER OF PARAMETER MATCHES FOR THE FOLLOWING EMITTER PARAMETERS: FREQUENCY, PULSE REPETITION FREQUENCY, PULSE WIDTH, JITTER, SCAN CYCLE/ANTENNA ROTATION PERIOD/SCAN RATE, SCAN TYPE AND POLARIZATION. A PARAMETER MATCH MEANS THAT AN EMITTER PARAMETER HAS BEEN DETECTED, MEASURED, AND COMPARED WITH DATA STORED IN INTELLIGENCE FILES. IT FURTHER IMPLIES THAT NO PARAMETER FOUND IS OUTSIDE THE RANGE SPECIFIED IN THE INTELLIGENCE FILE.

NO STATEMENT

0

VALUE 1

1

VALUE 2 THROUGH 5

2 THROUGH 5

LOW CONFIDENCE - LESS THAN 4 PARAMETER MATCHES.

THE VALUE IS DETERMINED BY THE FOLLOWING RULES:

A. INCREASE ONE VALUE FOR EACH ADDITIONAL PARAMETER MATCH ABOVE 3.

B. INCREASE ONE VALUE FOR AN ES/ NON-ES 'OPERATOR KNOWN' ASSOCIATION (THE OPERATOR RECOGNIZES AN ASSOCIATION THAT MAY OR MAY NOT HAVE BEEN TRANSMITTED ON THE LINK).

C. INCREASE TWO VALUES FOR EVERY 'OPERATOR KNOWN' EMITTER ASSOCIATION.

D. THE TOTAL SHALL NOT EXCEED 5. HIGH CONFIDENCE (OPERATOR EVALUATION).

POSITIVE CONFIDENCE.

5.3-488

MIL-STD-6016B

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: ELECTRONIC WARFARE CONTROL/COORDINATION CONTINUATION WORD 4

24	23	22:	21:	20	19	18	17	16	15	14	13	12	11	10	09	08	07:	06	05	04	03	02:	01	00:			
FREQUENCY : F/R:																		CONTINUATION WORD :				WORD :					
MULTIPLIER, : IND:																		SPARE :				LABEL :				FORMAT :	
1		:	:															:					:	:			
4		:	1	:	14														:	5				:	2	:	

:	49	48	47	46:	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26:	25
:	FREQUENCY				:																			:	
:	MULTIPLIER, 2				:	FREQUENCY, 1																		:--->	
:					:																			:	
:	4				:	20																		:	

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50	:
:																					:
:	FREQUENCY, 2																				:
:																					:
:	20																				:

WORD DESCRIPTION

WORD NUMBER: J14.2C4

WORD TITLE: ELECTRONIC WARFARE CONTROL/COORDINATION CONTINUATION WORD 4

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	00100
756 014	SPARE	7-	20 14	
1819 001	FREQUENCY/FREQUENCY RANGE INDICATOR (F/R IND)	21	1	
1820 003	FREQUENCY MULTIPLIER, 1 (FRQ ML1)	22-	25 4	
417 006	FREQUENCY, 1 (FRQ1)	26-	45 20	
1820 004	FREQUENCY MULTIPLIER, 2 (FRQ ML2)	46-	49 4	
417 007	FREQUENCY, 2 (FRQ2)	50-	69 20	

FIELD CODING FOR J14.2C4

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1819	001	FREQUENCY/FREQUENCY RANGE INDICATOR -----		FREQUENCY/FREQUENCY RANGE INDICATOR FIELD IS USED WITH THE FOLLOWING FIELDS TO INDICATE THAT A FREQUEN- CY OR A FREQUENCY RANGE IS BEING DESCRIBED: FREQUENCY MULTI- PLIER, 1; FREQUENCY, 1; FREQUENCY MULTIPLIER, 2; FREQUENCY, 2.
		FREQUENCY	0	THE FREQUENCY, 1 FIELD AND THE FREQUENCY MULTIPLIER, 1 FIELD SHOULD BE INTERPRETED TO DETERMINE THE SINGLE FREQUENCY BEING TRANSMITTED IN THIS MESSAGE. THE FREQUENCY, 2 FIELD AND THE FREQUENCY MULTIPLIER, 2 FIELD SHOULD BE 0SET TO NO STATEMENT AND NOT BE INTERPRETED.
		FREQUENCY RANGE	1	THE FREQUENCY AND FREQUENCY MULTIPLIER FIELDS SHOULD BE INTERPRETED TO DETERMINE THE UPPER AND LOWER LIMITS OF THE FREQUENCY RANGE BEING TRANSMITTED IN THIS MESSAGE.
1820	003	FREQUENCY MULTIPLIER, 1 -----		EXPRESSED AS A POWER OF TEN. THIS FIELD IS USED AS A MULTIPLIER TO DETERMINE THE FREQUENCY, 1.
		NUMERIC NO STATEMENT	0 THROUGH 14 15	
417	006	FREQUENCY, 1 -----		WHEN THE FREQUENCY/FREQUENCY RANGE FIELD IS SET TO ZERO, THIS FIELD IS USED WITH THE FREQUENCY MULTIPLIER, 1 FIELD TO SPECIFY A SINGLE FREQUENCY BEING DESCRIBED. WHEN THE FREQUENCY/FREQUENCY RANGE FIELD IS SET TO ONE, THIS FIELD IS USED WITH THE FREQUENCY MULTIPLIER, 1 FIELD TO SPECIFY THE LOWER LIMIT OF A FREQUENCY RANGE BEING DESCRIBED.
		NO STATEMENT NUMERIC	0 1 THROUGH 1048575	EXPRESSED IN HERTZ. THIS VALUE IS USED WITH THE FREQUENCY MULTIPLIER, 1 FIELD TO SPECIFY MULTIPLES OF THIS FREQUENCY.

FIELD CODING FOR J14.2C4 (SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1820	004	FREQUENCY MULTIPLIER, 2 ----- NUMERIC NO STATEMENT	0 THROUGH 14 15	EXPRESSED AS A POWER OF TEN. THIS FIELD IS USED AS A MULTIPLIER TO DETERMINE THE FREQUENCY, 2.
417	007	FREQUENCY, 2 ----- NO STATEMENT NUMERIC	0 1 THROUGH 1048575	WHEN THE FREQUENCY/FREQUENCY RANGE FIELD IS SET TO ZERO, THIS FIELD SHOULD BE SET TO NO STATEMENT. WHEN THE FREQUENCY/FREQUENCY RANGE FIELD IS SET TO ONE, THIS FIELD IS USED WITH THE FREQUENCY MULTIPLIER, 2 FIELD TO SPECIFY THE UPPER LIMIT OF A FREQUENCY RANGE BEING DESCRIBED. EXPRESSED IN HERTZ. THIS VALUE IS USED WITH THE FREQUENCY MULTIPLIER, 2 FIELD TO SPECIFY MULTIPLES OF THIS FREQUENCY.

WORD MAP

WORD NUMBER: J14.2C5
WORD TITLE: ELECTRONIC WARFARE CONTROL/COORDINATION CONTINUATION WORD 5

24	23:	22	21	20	19	18	17:	16	15	14:	13	12	11	10	09	08	07:	06	05	04	03	02:	01	00:						
<---	:	SPACE PLATFORM						:							:							:								
-----	:	AIR PLATFORM						:							:							:								
<---	:	SURFACE (MARITIME) PLATFORM						:							:							:								
<---	:	SUBSURFACE (MARITIME) PLATFORM						:	ENV/CAT	:	NATIONALITY/ALLIANCE OF TRACK						:	CONTINUATION WORD LABEL				:	WORD FORMAT	:						
-----	:	LAND (GROUND) PLATFORM						:							:							:								
<---	:	SPARE						:							:							:								
-----	:													:							:							:		
<---	:													:							:							:		
-----	:													:							:							:		
<---	:							:							:							:								
		:	6						:	3	:	7						:	5				:	2	:					

WORD MAP

WORD NUMBER: J14.2C5

WORD TITLE: ELECTRONIC WARFARE CONTROL/COORDINATION CONTINUATION WORD 5

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
								:	SPACE SPECIFIC TYPE											:	SPACE PLATFORM			
								:												:	ACTIVITY			
								:	AIR SPECIFIC TYPE											:				
								:	SURFACE (MARITIME) SPECIFIC TYPE											:	AIR PLATFORM			
								:												:	ACTIVITY			
								:	SUBSURFACE (MARITIME) SPECIFIC TYPE											:	SURFACE (MARITIME)			
								:												:	PLATFORM ACTIVITY			
								:	LAND (GROUND) SPECIFIC TYPE											:				
								:												:	SUBSURFACE			
								:												:	(MARITIME) PLATFORM			
								:												:	ACTIVITY			
								:												:				
								:	SPARE											:	LAND (GROUND)			
								:												:	PLATFORM ACTIVITY			
								:												:				
								:												:	SPARE			
								:	12											:	7			

:	69	68	67	66	65	64	63	62	61	60	59	58:	57	56	55	54	53	52	51	50	
:													:								
:	LOCAL DISCRETE IDENTIFIER												:	SPARE							
:													:								
:	12												:	16							

WORD DESCRIPTION

WORD NUMBER: J14.2C5

WORD TITLE: ELECTRONIC WARFARE CONTROL/COORDINATION CONTINUATION WORD 5

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	01
1551	001	CONTINUATION WORD LABEL	2-	6 5	00101
748	001	NATIONALITY/ALLIANCE OF TRACK	7-	13 7	
275	004	ENVIRONMENT/CATEGORY (ENV/CAT)	14-	16 3	SEE NOTES 1 AND 2.
1797	005	SPACE PLATFORM	17-	22 6	SEE NOTE 1.
1797	001	AIR PLATFORM	17-	22 6	SEE NOTE 1.
1797	002	SURFACE (MARITIME) PLATFORM	17-	22 6	SEE NOTE 1.
1797	003	SUBSURFACE (MARITIME) PLATFORM	17-	22 6	SEE NOTE 1.
1797	004	LAND (GROUND) PLATFORM	17-	22 6	SEE NOTE 1.
756	006	SPARE	17-	22 6	
1798	005	SPACE PLATFORM ACTIVITY	23-	29 7	SEE NOTE 2.
1798	001	AIR PLATFORM ACTIVITY	23-	29 7	SEE NOTE 2.
1798	002	SURFACE (MARITIME) PLATFORM ACTIVITY	23-	29 7	SEE NOTE 2.
1798	003	SUBSURFACE (MARITIME) PLATFORM ACTIVITY	23-	29 7	SEE NOTE 2.
1798	004	LAND (GROUND) PLATFORM ACTIVITY	23-	29 7	SEE NOTE 2.
756	007	SPARE	23-	29 7	
749	002	SPACE SPECIFIC TYPE	30-	41 12	
804	001	AIR SPECIFIC TYPE	30-	41 12	
808	001	SURFACE (MARITIME) SPECIFIC TYPE	30-	41 12	
809	001	SUBSURFACE (MARITIME) SPECIFIC TYPE	30-	41 12	
810	001	LAND (GROUND) SPECIFIC TYPE	30-	41 12	
756	012	SPARE	30-	41 12	
756	016	SPARE	42-	57 16	
754	001	LOCAL DISCRETE IDENTIFIER	58-	69 12	

J14.2C5 WORD NOTES
NOTE 1 Environment/Category - Platform (Sheet 1 of 5)

PLATFORM	ENVIRONMENT/CATEGORY						
	0	1	2	3	4	5	6-7
	NO STATEMENT/ UNKNOWN	SPACE	AIR	SURFACE (MARITIME)	SUBSURFACE (MARITIME)	LAND (GROUND)	UNDEFINED
0	NO STATEMENT	NO STATEMENT	NO STATEMENT	NO STATEMENT	NO STATEMENT	NO STATEMENT	UNDEFINED
1	ILLEGAL	SATELLITE	FIGHTER	AIRCRAFT CARRIER (CV)	SUBMARINE PROPULSION UNKNOWN	TROOP CONCENTRATION/UNIT	UNDEFINED
2	ILLEGAL	BASE	FIGHTER BOMBER	BATTLESHIP	DIESEL ELECTRIC SUBMARINE GENERAL	HEADQUARTER COMPLEX	UNDEFINED
3	ILLEGAL	WEAPON	ATTACK	CRUISER	DIESEL ELECTRIC ATTACK SUBMARINE	COMMAND/CONTROL COMMAND AND CONTROL CENTER	UNDEFINED
4	ILLEGAL	TRANSPORT	BOMBER	DESTROYER	DIESEL ELECTRIC MISSILE SUBMARINE	ASSEMBLY AREA	UNDEFINED
5	ILLEGAL	PATROL	RECONNAISSANCE	FRIGATE	DIESEL ELECTRIC BALLISTIC MISSILE SUBMARINE	INSTALLATION/FACILITY, MILITARY	UNDEFINED
6	ILLEGAL	SUPPORT	TANKER	FAST PATROL BOAT	TYPE 1 DIESEL	INSTALLATION/FACILITY, CIVILIAN	UNDEFINED
7	ILLEGAL	DEBRIS	TANKER (BOOM ONLY)	AMPHIBIOUS	TYPE 2 DIESEL	AIRFIELD/AIRBASE	UNDEFINED
8	ILLEGAL	DECOY	TANKER (DROGUE ONLY)	LHA/LHD	TYPE 3 DIESEL	PORT/HARBOR FACILITY	UNDEFINED
9	ILLEGAL	UNDEFINED	INTERCEPTOR	AMPHIBIOUS ASSAULT COMMAND SHIP (LCC)	NUCLEAR SUBMARINE GENERAL	STORAGE SITE	UNDEFINED
10	ILLEGAL	UNDEFINED	TRANSPORT	LANDING CRAFT (LC)	NUCLEAR ATTACK SUBMARINE	TACTICAL POSITION	UNDEFINED

5.3-497

MIL-STD-6016B

J14.2C5 WORD NOTES (Continued)
NOTE 1 Environment/Category - Platform (Sheet 2 of 5)

PLATFORM	ENVIRONMENT/CATEGORY						
	0	1	2	3	4	5	6-7
	NO STATEMENT/ UNKNOWN	SPACE	AIR	SURFACE (MARITIME)	SUBSURFACE (MARITIME)	LAND (GROUND)	UNDEFINED
11	ILLEGAL	UNDEFINED	AIRBORNE COMMAND POST (ACP)	TROOP SHIP	NUCLEAR MISSILE SUBMARINE	FORTIFICATION	UNDEFINED
12	ILLEGAL	UNDEFINED	MISSILE CARRIER	TANKER/OILER	NUCLEAR BALLISTIC MISSILE SUBMARINE	INTERSECTION	UNDEFINED
13	ILLEGAL	UNDEFINED	MISSILE	AUXILIARY SHIP	TYPE I NUCLEAR	CONVOY	UNDEFINED
14	ILLEGAL	UNDEFINED	ELECTRONIC WARFARE (EW)	MINE WARFARE SHIP	TYPE II NUCLEAR	COMBAT VEHICLE	UNDEFINED
15	ILLEGAL	UNDEFINED	ANTISUBMARINE WARFARE (ASW)	MINE COUNTERMEASURES MARITIME VESSEL (MCMV)	TYPE III NUCLEAR	COMBAT SUPPORT VEHICLE	UNDEFINED
16	ILLEGAL	UNDEFINED	AIRBORNE EARLY WARNING AND CONTROL (AEW&C)	HOSPITAL SHIP	TYPE IV NUCLEAR	VEHICLE, OTHER	UNDEFINED
17	ILLEGAL	UNDEFINED	MARITIME PATROL AIRCRAFT (MPA)	SURFACED SUBMARINE	TYPE V NUCLEAR	TANK	UNDEFINED
18	ILLEGAL	UNDEFINED	SEARCH AND RESCUE (SAR)	HYDROFOIL	NON-SUBMARINE	TRAIN	UNDEFINED
19	ILLEGAL	UNDEFINED	DRONE	AIR CUSHION VEHICLE	SURFACE VESSEL	REMOTELY PILOTED VEHICLE	UNDEFINED
20	ILLEGAL	UNDEFINED	REMOTELY PILOTED VEHICLE (RPV)	INTELLIGENCE COLLECTOR	TORPEDO	MORTAR	UNDEFINED
21	ILLEGAL	UNDEFINED	FIXED WING GUNSHIP	SURVEY VESSEL	MINE	FIELD ARTILLERY	UNDEFINED
22	ILLEGAL	UNDEFINED	CIVIL, AIRLINER	NON-MILITARY	DECOY	AIR DEFENSE ARTILLERY	UNDEFINED
23	ILLEGAL	UNDEFINED	CIVIL, GENERAL	LANDING PLATFORM	WRECK	ROCKET LAUNCHER	UNDEFINED

5.3-498

MIL-STD-6016B

J14.2C5 WORD NOTES (Continued)
NOTE 1 Environment/Category - Platform (Sheet 3 of 5)

PLATFORM	ENVIRONMENT/CATEGORY						
	0	1	2	3	4	5	6-7
	NO STATEMENT/ UNKNOWN	SPACE	AIR	SURFACE (MARITIME)	SUBSURFACE (MARITIME)	LAND (GROUND)	UNDEFINED
24	ILLEGAL	UNDEFINED	LIGHTER THAN AIR (LTA)	LANDING SHIP	SEABED PIPELINE	MISSILE LAUNCHER	UNDEFINED
25	ILLEGAL	UNDEFINED	GLIDER	COMMAND	FISH/MARINE LIFE	SPECIAL WEAPON	UNDEFINED
26	ILLEGAL	UNDEFINED	DECOY	OCEAN RESEARCH	SWIMMER/FROGMAN	BRIDGE	UNDEFINED
27	ILLEGAL	UNDEFINED	HELICOPTER (HELO)	PATROL	KNUCKLE/WAKE	BUILDING/STRUCTURE	UNDEFINED
28	ILLEGAL	UNDEFINED	ATTACK HELICOPTER	SUPPORT	ATTACK SUBMARINE	POWER FACILITY	UNDEFINED
29	ILLEGAL	UNDEFINED	HELICOPTER GUNSHIP	FISHING VESSEL	CRUISE MISSILE LAUNCHER	RAIL FACILITY	UNDEFINED
30	ILLEGAL	UNDEFINED	ANTISUBMARINE WARFARE HELICOPTER (ASW HELO)	MERCHANT VESSEL	PINNACLE/SEA MOUNTAIN	TERRAIN	UNDEFINED
31	ILLEGAL	SPACE GENERAL	MINE WARFARE HELICOPTER	PATROL CRAFT ESCORT	NON-MILITARY SUBMERSIBLE	NAVAID SITE	UNDEFINED
32	ILLEGAL	UNDEFINED	TRANSPORT HELICOPTER	AMPHIBIOUS GENERAL ASSAULT	UNDEFINED	COMMUNICATION SITE	UNDEFINED
33	ILLEGAL	UNDEFINED	TACTICAL SUPPORT	MISSILE CONTROL UNIT	TYPE VI NUCLEAR	RADAR SITE	UNDEFINED
34	ILLEGAL	UNDEFINED	PATROL	DECOY	TYPE VII NUCLEAR	ANTENNA/EMITTER	UNDEFINED
35	ILLEGAL	UNDEFINED	MISCELLANEOUS FIXED WING	UNDEFINED	CONVENTIONAL (COMMAND AND CONTROL)	BUFFER CENTER	UNDEFINED
36	ILLEGAL	UNDEFINED	MISSILE CONTROL UNIT	UNDEFINED	CONVENTIONAL (AUXILIARY)	ELECTRONIC WARFARE SITE	UNDEFINED

5.3-499

MIL-STD-6016B

J14.2C5 WORD NOTES (Continued)
NOTE 1 Environment/Category - Platform (Sheet 4 of 5)

PLATFORM	ENVIRONMENT/CATEGORY						
	0	1	2	3	4	5	6-7
	NO STATEMENT/ UNKNOWN	SPACE	AIR	SURFACE (MARITIME)	SUBSURFACE (MARITIME)	LAND (GROUND)	UNDEFINED
37	ILLEGAL	UNDEFINED	SURFACE-TO-AIR MISSILE (SAM)	UNDEFINED	NUCLEAR (COMMAND AND CONTROL)	SURVEILLANCE SITE	UNDEFINED
38	ILLEGAL	UNDEFINED	AIR-TO-SURFACE MISSILE (ASM)	UNDEFINED	UNDEFINED	BRIDGING EQUIPMENT	UNDEFINED
39	ILLEGAL	UNDEFINED	SURFACE-TO- SURFACE MISSILE (SSM)	UNDEFINED	UNDEFINED	MINE WARFARE EQUIPMENT	UNDEFINED
40	ILLEGAL	UNDEFINED	LOGISTIC	UNDEFINED	UNDEFINED	SURFACE-TO-AIR MISSILE (SAM) SITE	UNDEFINED
41	ILLEGAL	UNDEFINED	AIR-TO-AIR MISSILE (AAM)	UNDEFINED	UNDEFINED	MARITIME HEADQUARTERS	UNDEFINED
42	ILLEGAL	UNDEFINED	SUBSURFACE-TO- SURFACE MISSILE	UNDEFINED	UNDEFINED	AIR SUPPORT RADAR TEAM (ASRT)	UNDEFINED
43	ILLEGAL	UNDEFINED	SURFACE-TO- SUBSURFACE MISSILE	UNDEFINED	UNDEFINED	DIRECT AIR SUPPORT CENTER (DASC)	UNDEFINED
44	ILLEGAL	UNDEFINED	CRUISE MISSILE	UNDEFINED	UNDEFINED	FORWARD AIR CONTROL PARTY (FACP)	UNDEFINED
45	ILLEGAL	UNDEFINED	BALLISTIC MISSILE	UNDEFINED	UNDEFINED	TACTICAL OPERATIONS CENTER (TOC)	UNDEFINED
46	ILLEGAL	UNDEFINED	AIRBORNE LAND SURVEILLANCE	UNDEFINED	UNDEFINED	TACTICAL DATA SYSTEMS (TDS)	UNDEFINED
47	ILLEGAL	UNDEFINED	AIRBORNE LASER	UNDEFINED	UNDEFINED	DECOY	UNDEFINED

5.3-500

MIL-STD-6016B

J14.2C5 WORD NOTES (Continued)
NOTE 1 Environment/Category - Platform (Sheet 5 of 5)

PLATFORM	ENVIRONMENT/CATEGORY						
	0	1	2	3	4	5	6-7
	NO STATEMENT/ UNKNOWN	SPACE	AIR	SURFACE (MARITIME)	SUBSURFACE (MARITIME)	LAND (GROUND)	UNDEFINED
48	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	TRACKED VEHICLE	UNDEFINED
49	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	MISSILE CONTROL UNIT	THEATER HIGH ALTITUDE AREA DEFENSE (THAAD)	UNDEFINED
50	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	JOINT TACTICAL GROUND STATION (JTAGS)	UNDEFINED
51	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	ARMOR	UNDEFINED
52	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	CAVALRY	UNDEFINED
53	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	ENGINEER	UNDEFINED
54	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	AIRBORNE/SPECIAL OPERATIONS	UNDEFINED
55	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	AVIATION	UNDEFINED
56	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	AIR DEFENSE SITE	UNDEFINED
57	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	BALLISTIC MISSILE DEFENSE SITE	UNDEFINED
58 • • • 61	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
62	ILLEGAL	BALLISTIC MISSILE GENERAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
63	ILLEGAL	RESET TO NO STATEMENT	RESET TO NO STATEMENT	RESET TO NO STATEMENT	RESET TO NO STATEMENT	RESET TO NO STATEMENT	UNDEFINED

5.3-501

MIL-STD-6016B

J14.2C5 WORD NOTES (Continued)
NOTE 2 Environment/Category - Platform Activity (Sheet 1 of 4)

PLATFORM ACTIVITY	E N V I R O N M E N T / C A T E G O R Y						
	0	1	2	3	4	5	6-7
	NO STATEMENT/ UNKNOWN	SPACE	AIR	SURFACE (MARITIME)	SUBSURFACE (MARITIME)	LAND (GROUND)	UNDEFINED
0	NO STATEMENT	NO STATEMENT	NO STATEMENT	NO STATEMENT	NO STATEMENT	NO STATEMENT	UNDEFINED
1	ILLEGAL	RECONNAISSANCE	RECONNAISSANCE	AIR WARFARE SUPPORT	RECONNAISSANCE	HOLDING	UNDEFINED
2	ILLEGAL	ANTISPACE WARFARE	OVER THE HORIZON TARGETING (OTHT)	OVER THE HORIZON TARGETING (OTHT)	OVER THE HORIZON TARGETING (OTHT)	DELAYING	UNDEFINED
3	ILLEGAL	TELEVISION	TRAINING	TRAINING	TRAINING	MOVING	UNDEFINED
4	ILLEGAL	LOGISTICS	LOGISTICS SUPPORT	LOGISTICS SUPPORT	DIVING	DETECTING	UNDEFINED
5	ILLEGAL	ANTISURFACE WARFARE	ANTISURFACE WARFARE	ANTISURFACE WARFARE	ANTISURFACE WARFARE	ACQUIRING	UNDEFINED
6	ILLEGAL	ELECTRONIC WARFARE (EW)	ELECTRONIC WARFARE (EW)	ELECTRONIC WARFARE (EW)	ELECTRONIC WARFARE (EW)	ENGAGING	UNDEFINED
7	ILLEGAL	SURVEILLANCE	SURVEILLANCE	FISHERY PROTECTION	SURVEILLANCE	ADVANCING	UNDEFINED
8	ILLEGAL	DATA LINK	SEARCH AND RESCUE (SAR)	SEARCH AND RESCUE (SAR)	SEARCH AND RESCUE (SAR)	ANTIAIR ATTACK	UNDEFINED
9	ILLEGAL	ELECTRONIC WARFARE SUPPORT (ES)	ESCORTING	ESCORTING	ESCORTING	AMPHIBIOUS ATTACK	UNDEFINED
10	ILLEGAL	ELECTRONIC ATTACK (EA)	MINELAYING	MINELAYING	MINELAYING	FIRING/LAUNCHING	UNDEFINED
11	ILLEGAL	COMMUNICATIONS	TRANSITING	TRANSITING	TRANSITING	CONVENTIONAL ATTACK ASSAULT	UNDEFINED
12	ILLEGAL	RETURN TO BASE (RTB)	SPECIAL WEAPONS ATTACK	NAVAL GUNFIRE SUPPORT	SPECIAL WEAPONS ATTACK	SPECIAL WEAPONS ATTACK	UNDEFINED
13	ILLEGAL	UNDEFINED	INTRUDING	INTRUDING	SURFACING	DEMOLITION	UNDEFINED
14	ILLEGAL	UNDEFINED	ELECTRONIC WARFARE SUPPORT (ES)	AMPHIBIOUS WARFARE	AMPHIBIOUS WARFARE	OVER THE HORIZON TARGETING (OTHT)	UNDEFINED
15	ILLEGAL	UNDEFINED	COMMUNICATIONS RELAY	INTELLIGENCE COLLECTING	INTELLIGENCE COLLECTING	TRANSITING	UNDEFINED
16	ILLEGAL	UNDEFINED	PATROL (OCEAN SURVEILLANCE)	PATROL	PATROL	RETURN TO BASE	UNDEFINED
17	ILLEGAL	UNDEFINED	AIRLIFT (TRANSPORT)	TRANSPORT	TRANSPORT	DEPLOYING	UNDEFINED
18	ILLEGAL	UNDEFINED	ANTISUBMARINE WARFARE (ASW)	ANTISUBMARINE WARFARE (ASW)	ANTISUBMARINE WARFARE (ASW)	EMISSION CONTROL (EMCON)	UNDEFINED
19	ILLEGAL	UNDEFINED	SHADOWING/INTERVENING	SHADOWING/INTERVENING	SHADOWING/INTERVENING	RIVER CROSSING	UNDEFINED
20	ILLEGAL	UNDEFINED	TOWING	TOWING	BOTTOMING	LOADING	UNDEFINED
21	ILLEGAL	UNDEFINED	AIR ASSAULT	SPECIAL WARFARE	SPECIAL WARFARE	TOWING	UNDEFINED
22	ILLEGAL	UNDEFINED	INTERCEPTION	STRIKE WARFARE	STIKE WARFARE	BUILDING FORTIFICATION BARRIER	UNDEFINED
23	ILLEGAL	UNDEFINED	ELECTRONIC ATTACK (EA)	ANTIAIR WARFARE	CLANDESTINE OPERATIONS	CLEARING BARRIER	UNDEFINED

5.3-502

MIL-STD-6016B

J14.2C5 WORD NOTES (Continued)
NOTE 2 Environment/Category - Platform Activity (Sheet 2 of 4)

PLATFORM ACTIVITY	E N V I R O N M E N T / C A T E G O R Y						
	0 NO STATEMENT/ UNKNOWN	1 SPACE	2 AIR	3 SURFACE (MARITIME)	4 SUBSURFACE (MARITIME)	5 LAND (GROUND)	6-7 UNDEFINED
24	ILLEGAL	UNDEFINED	POLICING	FISHING	SNORKELING	RECOVERING EQUIPMENT	UNDEFINED
25	ILLEGAL	UNDEFINED	CONVENTIONAL ATTACK	PICKETING	CONVENTIONAL ATTACK	MINE SWEEPING	UNDEFINED
26	ILLEGAL	UNDEFINED	MEDICAL EVACUATION (MEDEVAC)	MINE COUNTERMEASURES	MINE COUNTERMEASURES	MINE LAYING	UNDEFINED
27	ILLEGAL	UNDEFINED	MINE COUNTERMEASURES	MINE WARFARE	MINE WARFARE	JAMMING	UNDEFINED
28	ILLEGAL	UNDEFINED	SEARCH	MARKING	MARKING	RECONNAISSANCE PATROLLING	UNDEFINED
29	ILLEGAL	UNDEFINED	REFUELING/TANKING	NONCOMBATANT OPERATIONS	NONCOMBATANT OPERATIONS	SEARCH AND RESCUE (SAR)	UNDEFINED
30	ILLEGAL	UNDEFINED	INTERDICTION	UNDERWAY REPLENISHMENT	DIRECT SUPPORT	TRAINING	UNDEFINED
31	ILLEGAL	UNDEFINED	COMBAT AIR PATROL (CAP)	SURVEYING	VIDEO DATA LINKING (TARGETING)	MEDICAL EVACUATION (MEDEVAC)	UNDEFINED
32	ILLEGAL	UNDEFINED	FORWARD AIR CONTROLLER (FAC)	ELECTRONIC WARFARE SUPPORT (ES)	UNDEFINED	ESCORTING	UNDEFINED
33	ILLEGAL	UNDEFINED	VERY IMPORTANT PERSON (VIP) FLIGHT	ELECTRONIC ATTACK (EA)	UNDEFINED	TRANSPORTING	UNDEFINED
34	ILLEGAL	UNDEFINED	NONCOMBATANT OPERATIONS	FLIGHT OPERATIONS	UNDEFINED	SCREENING	UNDEFINED
35	ILLEGAL	UNDEFINED	CLOSE AIR SUPPORT (CAS)	VIDEO DATA LINKING (TARGETING)	UNDEFINED	SUPPORTING	UNDEFINED
36	ILLEGAL	UNDEFINED	AIRBORNE EARLY WARNING (AEW)	PLANE GUARD	UNDEFINED	REPAIRING	UNDEFINED
37	ILLEGAL	UNDEFINED	GROUND ATTACK TACTICS (GAT)	RESCUE SHIP/LIFEGUARD	UNDEFINED	REFUELING	UNDEFINED
38	ILLEGAL	UNDEFINED	AIRBORNE COMMAND POST (ACP)	UNDEFINED	UNDEFINED	NEUTRALIZING	UNDEFINED
39	ILLEGAL	UNDEFINED	RESCUE COMBAT AIR PATROL (RESCAP)	UNDEFINED	UNDEFINED	TARGETING	UNDEFINED
40	ILLEGAL	UNDEFINED	SURFACE COMBAT AIR PATROL (SUCAP)	UNDEFINED	UNDEFINED	BYPASSING	UNDEFINED
41	ILLEGAL	UNDEFINED	TANKING	UNDEFINED	UNDEFINED	CLOSING	UNDEFINED
42	ILLEGAL	UNDEFINED	SPOTTING	UNDEFINED	UNDEFINED	CONCENTRATING	UNDEFINED
43	ILLEGAL	UNDEFINED	STRIKE WARFARE	UNDEFINED	UNDEFINED	DEFENDING	UNDEFINED
44	ILLEGAL	UNDEFINED	SPECIAL	UNDEFINED	UNDEFINED	DISENGAGING	UNDEFINED
45	ILLEGAL	UNDEFINED	HIJACK	UNDEFINED	UNDEFINED	INFILTRATING	UNDEFINED
46	ILLEGAL	UNDEFINED	JAMMER	UNDEFINED	UNDEFINED	INTERDICTING	UNDEFINED

5.3-503

MIL-STD-6016B

J14.2C5 WORD NOTES (Continued)
NOTE 2 Environment/Category - Platform Activity (Sheet 3 of 4)

PLATFORM ACTIVITY	E N V I R O N M E N T / C A T E G O R Y						
	0 NO STATEMENT/ UNKNOWN	1 SPACE	2 AIR	3 SURFACE (MARITIME)	4 SUBSURFACE (MARITIME)	5 LAND (GROUND)	6-7 UNDEFINED
47	ILLEGAL	UNDEFINED	TROOPLIFT	UNDEFINED	UNDEFINED	LANDING	UNDEFINED
48	ILLEGAL	UNDEFINED	XRAY	UNDEFINED	UNDEFINED	OCCUPYING	UNDEFINED
49	ILLEGAL	UNDEFINED	ANTIAIR WARFARE (AAW)	UNDEFINED	UNDEFINED	DISPERSING	UNDEFINED
50	ILLEGAL	UNDEFINED	COMMAND AND CONTROL	RETURN TO BASE (RTB)	RETURN TO BASE (RTB)	SUPPLY/RESUPPLY	UNDEFINED
51	ILLEGAL	SPACE ACTIVITY 1	COUNTER-AIR-WARFARE	UNDEFINED	UNDEFINED	RETROGRADE WITHDRAWING	UNDEFINED
52	ILLEGAL	SPACE ACTIVITY 2	RETURN TO BASE (RTB)	UNDEFINED	UNDEFINED	TRANSMITTING	UNDEFINED
53	ILLEGAL	SPACE ACTIVITY 3	MINE WARFARE	UNDEFINED	UNDEFINED	ELECTRONIC WARFARE SUPPORT (ES)	UNDEFINED
54	ILLEGAL	SPACE ACTIVITY 4	CHAFF LAYING	UNDEFINED	UNDEFINED	ELECTRONIC ATTACK (EA)	UNDEFINED
55	ILLEGAL	SPACE ACTIVITY 5	VIDEO DATA LINKING (TARGETING)	UNDEFINED	UNDEFINED	MOVING EQUIPMENT	UNDEFINED
56	ILLEGAL	SPACE ACTIVITY 6	DIPPING	UNDEFINED	UNDEFINED	POWER UP AND MANNED, NOT EMITTING	UNDEFINED
57	ILLEGAL	SPACE ACTIVITY 7	RESCUE HELO	UNDEFINED	UNDEFINED	PREPARATION FOR LAUNCH	UNDEFINED
58	ILLEGAL	SPACE ACTIVITY 8	ORBITING	UNDEFINED	UNDEFINED	SITE SHUT DOWN TO UNPOWERED SATUS	UNDEFINED
59	ILLEGAL	SPACE ACTIVITY 9	UNDER RECALL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
60	ILLEGAL	SPACE ACTIVITY 10	ENGAGING	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
61	ILLEGAL	SPACE ACTIVITY 11	ENGAGING (PRIORITY KILL)	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
62	ILLEGAL	SPACE ACTIVITY 12	INVESTIGATING	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
63	ILLEGAL	UNDEFINED	CLEARED TO DROP	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
64	ILLEGAL	UNDEFINED	INTERVENING	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
65	ILLEGAL	UNDEFINED	DIVERTING	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
66	ILLEGAL	UNDEFINED	AIR-TO-GROUND	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
67	ILLEGAL	UNDEFINED	AIR-TO-AIR	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
68	ILLEGAL	UNDEFINED	PRECISION BOMBING	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
69	ILLEGAL	UNDEFINED	LASER DESIGNATION	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED

5.3-504

MIL-STD-6016B

J14.2C5 WORD NOTES (Continued)
NOTE 2 Environment/Category - Platform Activity (Sheet 4 of 4)

PLATFORM ACTIVITY	E N V I R O N M E N T / C A T E G O R Y						
	0	1	2	3	4	5	6-7
	NO STATEMENT/ UNKNOWN	SPACE	AIR	SURFACE (MARITIME)	SUBSURFACE (MARITIME)	LAND (GROUND)	UNDEFINED
70	ILLEGAL	UNDEFINED	BEACON BOMBING	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
71	ILLEGAL	UNDEFINED	SHADOWING	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
72	ILLEGAL	UNDEFINED	COVERING	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
73	ILLEGAL	UNDEFINED	VISUAL IDENTIFICATION	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
74	ILLEGAL	UNDEFINED	HIGH ENERGY LASING	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
75 • • 114	ILLEGAL	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED	UNDEFINED
115	ILLEGAL	BALLISTIC MISSILE ACTIVITY 1	AIR ACTIVITY 1	SURFACE (MARITIME) ACTIVITY 1	SUBSURFACE (MARITIME) ACTIVITY 1	LAND (GROUND) ACTIVITY 1	UNDEFINED
116	ILLEGAL	BALLISTIC MISSILE ACTIVITY 2	AIR ACTIVITY 2	SURFACE (MARITIME) ACTIVITY 2	SUBSURFACE (MARITIME) ACTIVITY 2	LAND (GROUND) ACTIVITY 2	UNDEFINED
117	ILLEGAL	BALLISTIC MISSILE ACTIVITY 3	AIR ACTIVITY 3	SURFACE (MARITIME) ACTIVITY 3	SUBSURFACE (MARITIME) ACTIVITY 3	LAND (GROUND) ACTIVITY 3	UNDEFINED
118	ILLEGAL	BALLISTIC MISSILE ACTIVITY 4	AIR ACTIVITY 4	SURFACE (MARITIME) ACTIVITY 4	SUBSURFACE (MARITIME) ACTIVITY 4	LAND (GROUND) ACTIVITY 4	UNDEFINED
119	ILLEGAL	BALLISTIC MISSILE ACTIVITY 5	AIR ACTIVITY 5	SURFACE (MARITIME) ACTIVITY 5	SUBSURFACE (MARITIME) ACTIVITY 5	LAND (GROUND) ACTIVITY 5	UNDEFINED
120	ILLEGAL	BALLISTIC MISSILE ACTIVITY 6	AIR ACTIVITY 6	SURFACE (MARITIME) ACTIVITY 6	SUBSURFACE (MARITIME) ACTIVITY 6	LAND (GROUND) ACTIVITY 6	UNDEFINED
121	ILLEGAL	BALLISTIC MISSILE ACTIVITY 7	AIR ACTIVITY 7	SURFACE (MARITIME) ACTIVITY 7	SUBSURFACE (MARITIME) ACTIVITY 7	LAND (GROUND) ACTIVITY 7	UNDEFINED
122	ILLEGAL	BALLISTIC MISSILE ACTIVITY 8	AIR ACTIVITY 8	SURFACE (MARITIME) ACTIVITY 8	SUBSURFACE (MARITIME) ACTIVITY 8	LAND (GROUND) ACTIVITY 8	UNDEFINED
123	ILLEGAL	BALLISTIC MISSILE ACTIVITY 9	AIR ACTIVITY 9	SURFACE (MARITIME) ACTIVITY 9	SUBSURFACE (MARITIME) ACTIVITY 9	LAND (GROUND) ACTIVITY 9	UNDEFINED
124	ILLEGAL	BALLISTIC MISSILE ACTIVITY 10	AIR ACTIVITY 10	SURFACE (MARITIME) ACTIVITY 10	SUBSURFACE (MARITIME) ACTIVITY 10	LAND (GROUND) ACTIVITY 10	UNDEFINED
125	ILLEGAL	BALLISTIC MISSILE ACTIVITY 11	AIR ACTIVITY 11	SURFACE (MARITIME) ACTIVITY 11	SUBSURFACE (MARITIME) ACTIVITY 11	LAND (GROUND) ACTIVITY 11	UNDEFINED
126	ILLEGAL	BALLISTIC MISSILE ACTIVITY 12	AIR ACTIVITY 12	SURFACE (MARITIME) ACTIVITY 12	SUBSURFACE (MARITIME) ACTIVITY 12	LAND (GROUND) ACTIVITY 12	UNDEFINED
127	ILLEGAL	RESET TO NO STATEMENT	RESET TO NO STATEMENT	RESET TO NO STATEMENT	RESET TO NO STATEMENT	RESET TO NO STATEMENT	UNDEFINED

5.3-505

MIL-STD-6016B

FIELD CODING FOR J14.2C5

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
748	001	NATIONALITY/ALLIANCE OF TRACK -----		THE COUNTRY OF ORIGIN OR POLITICAL ENTITY OF A REPORTED OBJECT OR TRACK.
		NO STATEMENT	0	
		NAT/ALL-1 THROUGH NAT/ALL-28	1 THROUGH 28	THE NATION OR POLITICAL ENTITY OF THE TRACK IS TO BE DEFINED BY THE INDIVIDUAL THEATER OF OPERATION.
		DISUSED	29	
		USSR (SOVIET UNION)	30	
		NATO	31	
		BELGIUM	32	
		CYPRUS	33	
		DENMARK	34	
		FRANCE	35	
		GERMANY	36	
		FINLAND	37	
		GREECE	38	
		ICELAND	39	
		IRELAND	40	
		ITALY	41	
		NETHERLANDS	42	
		NORWAY	43	
		PORTUGAL	44	
		SPAIN	45	
		SWEDEN	46	
		SWITZERLAND	47	
		TURKEY	48	
		UNITED KINGDOM	49	
		ALBANIA	50	
		AUSTRIA	51	
		BULGARIA	52	
		CZECHOSLOVAKIA	53	
		DISUSED	54	
		HUNGARY	55	
		POLAND	56	
		RUMANIA	57	
		YUGOSLAVIA	58	
		CANADA	59	
		UNITED STATES OF AMERICA	60	
		EGYPT	61	
		IRAN	62	
		IRAQ	63	
		ISRAEL	64	
		JORDAN	65	

FIELD CODING FOR J14.2C5

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
748	001	NATIONALITY/ALLIANCE OF TRACK	(CONTINUED)	

		LEBANON	66	
		SAUDI ARABIA	67	
		SYRIA	68	
		ALGERIA	69	
		ETHIOPIA	70	
		LIBERIA	71	
		LIBYA	72	
		SOUTH AFRICA	73	
		INDIA	74	
		PAKISTAN	75	
		CAMBODIA	76	
		LAOS	77	
		THAILAND	78	
		VIETNAM	79	
		CHINA, PEOPLE'S REPUBLIC	80	
		CHINA, REPUBLIC	81	
		KOREA, NORTH	82	
		KOREA, REPUBLIC	83	
		JAPAN	84	
		PHILIPPINES	85	
		AUSTRALIA	86	
		NEW ZEALAND	87	
		ARGENTINA	88	
		BRAZIL	89	
		CHILE	90	
		COLUMBIA	91	
		MEXICO	92	
		PANAMA	93	
		PERU	94	
		VENEZUELA	95	
		CUBA	96	
		DOMINICAN REPUBLIC	97	
		UNITED NATIONS FORCE	98	
		KUWAIT	99	
		YEMEN ARAB REPUBLIC	100	
		GUINEA	101	
		MALAGASY (MADAGASCAR)	102	
		MOROCCO	103	
		NIGERIA	104	
		SENEGAL	105	
		ZIMBABWE	106	
		SPANISH NORTH AFRICA	107	
		SUDAN	108	

FIELD CODING FOR J14.2C5

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

748	001	NATIONALITY/ALLIANCE OF TRACK	(CONTINUED)	
-----	-----	-------------------------------	-------------	--

TANZANIA	109
TUNISIA	110
UGANDA	111
BURMA	112
INDONESIA	113
MALAYSIA	114
SINGAPORE	115
BOLIVIA	116
ECUADOR	117
GUATEMALA	118
NICARAGUA	119
PARAGUAY	120
URUGUAY	121
JAMAICA	122
INTERNATIONAL RED CROSS	123
LUXEMBOURG	124
YEMEN PEOPLE'S DEMOCRATIC REPUBLIC	125
UNDEFINED	126
RESET TO NO STATEMENT	127

749	002	SPACE SPECIFIC TYPE	
-----	-----	---------------------	--

NO STATEMENT	0
FROG-7	1
HONEST JOHN	2
SAKR 80	3
SS-21 MOD 2	4
SS-21 MOD 3	5
HAFT-I	6
UNDEFINED	7 THROUGH 78
SHORT RANGE (0-65 DM)	79
ALACRAN	80
CHENG FENG	81
CONDOR	82
HAFT II	83
IRAN-130	84
LANCE	85
MB/EE-150	86
MB/EE-300	87
UNDEFINED	88
PRITHVI	89

THE SPECIFIC TYPE OF A POINT OR
TRACK WITH AN ENVIRONMENT/CATEGORY
OF SPACE.

5.3-508

MIL-STD-6016B

FIELD CODING FOR J14.2C5

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
749	002	SPACE SPECIFIC TYPE	(CONTINUED)	

		SS-1B (SCUD-A)	90	
		SS-1C (SCUD-B)	91	
		SS-21 (SCARAB)	92	
		SS-300	93	
		B-610/CJS-98 (BG510)	94	
		NHK-I	95	
		NHK-II (HYON MU)	96	
		UNDEFINED	97 THROUGH 168	
		SHORT-MEDIUM RANGE	169	
		(66-200 DM)		
		AL-HUSAYN	170	
		UNDEFINED	171	
		HAFT III	172	
		M-9	173	
		M-11	174	
		MB/EE-600	175	
		SCUD-C	176	
		SS-23 (SPIDER)	177	
		AL HUSSEIN	178	
		UNDEFINED	179 THROUGH 242	
		MEDIUM RANGE (201-400	243	
		DM)		
		AL-ABBAS	244	
		JERICH0-I	245	
		AL HIJARAN	246	
		SONDA IV	247	
		UNDEFINED	248 THROUGH 330	
		MEDIUM-EXTENDED RANGE	331	
		(401-600 DM)		
		AL-FATAH	332	
		BADR-2000	333	
		CONDOR II	334	
		CSS-1	335	
		MB/EE-1000	336	
		SKY HORSE	337	
		SS-12A (SCALEBOARD A)	338	
		SS-12B (SCALEBOARD B)	339	
		SS1000	340	
		TIEN MA	341	
		UNDEFINED	342 THROUGH 416	
		EXTENDED RANGE (601-800	417	
		DM)		
		ARNISTON	418	

5.3-509

MIL-STD-6016B

FIELD CODING FOR J14.2C5

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
749	002	SPACE SPECIFIC TYPE	(CONTINUED)	

		CAPRICORNIO	419	
		JERICH0 II	420	
		NODONG-1	421	
		SS-N-5 (SERB)	422	
		UNDEFINED	423 THROUGH 496	
		EXTENDED-LONG RANGE	497	
		(801-1000 DM)		
		AGNI	498	
		AL/ABED	499	
		CC-4 (SANDAL)	500	
		CSS-5	501	
		UNDEFINED	502 THROUGH 575	
		LONG RANGE (1001-1350	576	
		DM)		
		CHEVALINE	577	
		CSS-2	578	
		CSS-3	579	
		CSS-4	580	
		CSS-N-3	581	
		M-4 SLBM	582	
		M-5 SLBM	583	
		M-20 SLBM	584	
		MIDGETMAN	585	
		MINUTEMAN I	586	
		MINUTEMAN II	587	
		PEACEKEEPER	588	
		POLARIS A-3	589	
		POSEIDON C-3	590	
		SS-11 (SEGO)	591	
		SS-13 (SAVAGE)	592	
		SS-17 (SPANKER) MOD 1	593	
		SS-17 (SPANKER) MOD 2	594	
		SS-17 (SPANKER) MOD 3	595	
		SS-18 (SATAN) MOD 1	596	
		SS-18 (SATAN) MOD 2	597	
		SS-18 (SATAN) MOD 3	598	
		SS-20 (SABER)	599	
		SS-24 (SCALPEL)	600	
		SS-25 (SICKLE)	601	
		SS-N-6 (SAWFLY)	602	
		SS-N-8	603	
		SS-N-17 (SNIPE)	604	
		SS-N-18 (STINGRAY)	605	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
749	002	SPACE SPECIFIC TYPE	(CONTINUED)	

		SS-N-20 (STURGEON)	606	
		SS-N-23 (SKIFF)	607	
		SSBS S-3	608	
		SSBS S-4	609	
		TRIDENT I (C-4)	610	
		TRIDENT II (D-5)	611	
		MODIFIED CSS-5	612	
		SS-19 MOD 3	613	
		UNDEFINED	614	
		NEW SOLID SLBM	615	
		CSS-NX-3	616	
		M4B	617	
		M45	618	
		UNDEFINED	619 THROUGH 786	
		>1350 DM	787	
		ABM-1B (GALOSH)	788	
		ARROW	789	
		ASTER	790	
		CORPS SAM	791	
		ERINT	792	
		HAWK	793	
		PATRIOT	794	
		SA-10 (GRUMBLE)	795	
		SA-12A (GLADIATOR)	796	
		SA-12B (GIANT)	797	
		SA-N-6 (GRUMBLE)	798	
		SH-08 (GAZELLE)	799	
		STANDARD MISSILE BLOCK	800	
		IVA		
		THAAD	801	
		SM-2 BLOCK IV	802	
		SM-3 LEAP	803	
		UNDEFINED	804 THROUGH 876	
		INTERCEPTOR	877	
		OPERATIONAL COMMANDER	878 THROUGH 941	
		DEFINED 1-64		
		UNDEFINED	942 THROUGH 1022	
		BALLISTIC MISSILE	1023	
		GENERAL		
		UNDEFINED	1024 THROUGH 2046	
		SPACE GENERAL	2047	
		UNDEFINED	2048 THROUGH 4093	
		RESET TO NO STATEMENT	4094	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
749	002	SPACE SPECIFIC TYPE ----- UNDEFINED	(CONTINUED) 4095	
804	001	AIR SPECIFIC TYPE ----- NO STATEMENT ----- FIGHTER ----- F-4 PHANTOM II F-5 TIGER II F-8 CRUSADER F-14 TOMCAT F-15 EAGLE F-16 FIGHTING FALCON F-101 VOODOO F-104 STARFIGHTER F-105 THUNDERCHIEF F-106 DELTA DART F-111 (GENERAL DYNAMICS) F/A-18 HORNET EFA F-102 F-100 DISUSED DISUSED COMMANDO DISUSED DISUSED J-35 DRAKEN JAGUAR SUPER ETENDARD DISUSED F-1 (MITSUBISHI) F-35XD DRAKEN DISUSED HF-24 MARUT (WIND SPIRIT) JA37 VIGGEN DISUSED SF-5 FREEDOM FIGHTER	 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 THROUGH 26 27 28 29 30 31 32 33	THE SPECIFIC TYPE OF POINT OR TRACK WITH AN ENVIRONMENT/CATEGORY OF AIR.

FIELD CODING FOR J14.2C5

(SHEET 8)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		IAR-91 ORAO	34	
		AJEET INVINCIBLE	35	
		KFIR C2	36	
		MIRAGE F1	37	
		MIRAGE 3	38	
		MIRAGE 5	39	
		MIRAGE 50	40	
		MIRAGE 2000	41	
		DISUSED	42	
		DISUSED	43	
		ALPHA JET	44	
		KEFIR	45	
		F-6 FARMER	46	
		F-8 FISHBED	47	
		F-9 FANTAN	48	
		F-12 (CHINA)	49	
		SU-7 FITTER	50	
		SU-9 FISHPOT	51	
		SU-11 FLAGON	52	
		SU-15 FLAGON	53	
		SU-17 FITTER	54	
		SU-19 FENCER	55	
		SU-20 FITTER	56	
		SU-22 FITTER	57	
		SU-24 FENCER	58	
		SU-25 FROGF00T	59	
		TU-28 FIDDLER	60	
		TU-128 FIDDLER	61	
		MIG-21 FISHBED	62	
		MIG-23 FLOGGER	63	
		MIG-25 FOXBAT	64	
		MIG-27 FLOGGER	65	
		YAK-28 FIREBAR	66	
		YAK-36 FORGER	67	
		AAF "RAM-J"	68	
		MIG-15 FAGOT	69	
		MIG-17 FRESCO	70	
		MIG-19 FARMER	71	
		SU-27 FLANKER	72	
		MIG-29 FULCRUM	73	
		MIG-31 FOXHOUND	74	
		YAK-38 FORGER-A	75	
		F-22 RAPTOR	76	

5.3-513

MIL-STD-6016B

FIELD CODING FOR J14.2C5

(SHEET 9)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		F-84 THUNDERSTREAK	77	
		F-86 SABRE	78	
		F/A2 SEA HARRIER	79	
		IDF CHING-KUO (TAIWAN)	80	
		JAS-39 GRIPPEN	81	
		JIAN JI-7	82	
		JIAN JI-8-2	83	
		JOINT STRIKE FIGHTER	84	
		KFIR C7	85	
		KFIR 2000	86	
		RAFALE	87	
		SU-30	88	
		SU-33 (SU-27K)	89	
		SU-34	90	
		SU-35	91	
		SU-37	92	
		SU-39	93	
		YAK-141 FREESTYLE	94	
		F-5 FRESCO	95	
		F-7 FISHBED	96	
		J-9	97	
		RT33	98	
		CF-188 HORNET	99	
		UNDEFINED	100	
		TORNADO F3	101	
		SEA HARRIER	102	
		F-5 NORTHROP	103	
		UNDEFINED	104	THROUGH 254
		FIGHTER GENERAL	255	

		BOMBERS/ATTACK		

		A-4 SKYHAWK	256	
		A-6 INTRUDER	257	
		A-7 CORSAIR II	258	
		A-10 THUNDERBOLT II	259	
		A-37 DRAGONFLY	260	
		B-1 (ROCKWELL)	261	
		B-52 STRATOFORTRESS	262	
		AC-130 HERCULES	263	
		AV-8 HARRIER	264	

5.3-514

MIL-STD-6016B

FIELD CODING FOR J14.2C5

(SHEET 10)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		F/A-18 HORNET	265	
		FB-111 (GENERAL DYNAMICS)	266	
		A-1	267	
		TA-28	268	
		DISUSED	269	
		AC-47	270	
		AC-119	271	
		AC-124	272	
		ALPHA JET	273	
		DISUSED	274 THROUGH 276	
		35XD DRAGEN	277	
		J-1 HAWK	278	
		J-1 JAESTREB	279	
		S-2	280	
		AJ37 VIGGEN	281	
		HA220 SUPER SAETA	282	
		M.B.326 (AERMACCHI)	283	
		M.B.339 (AERMACCHI)	284	
		SF 260 WARRIER	285	
		SK 60 (SAAB)	286	
		BAC 167 STRIKEMASTER	287	
		TORNADO GR-1 (IDS)	288	
		IL-28 BEAGLE	289	
		MI-4 BISON	290	
		TU-16 BADGER	291	
		TU-22 BLINDER	292	
		TU-22M BACKFIRE	293	
		TU-95 BEAR	294	
		TU-142 BEAR	295	
		YAK-28 BREWER	296	
		SUPER ENTENDARD	297	
		TU-160 BLACKJACK	298	
		AMX	299	
		FRS1 SEA HARRIER	300	
		FRS2 SEA HARRIER	301	
		FRS51 SEA HARRIER	302	
		F-117 NIGHTHAWK	303	
		G4 SUPER GALEB	304	
		G91Y	305	
		HAWK-2000	306	
		HAWK-100	307	
		HAWK-200	308	

5.3-515

MIL-STD-6016B

FIELD CODING FOR J14.2C5

(SHEET 11)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		HAWK-50	309	
		HAWK-60	310	
		IA-58 PUCARA	311	
		IAR-93 ORAO	312	
		IAR-99 SOIM	313	
		JIAN JI-5M	314	
		A-5 FANTAN	315	
		L59 ALBATROS	316	
		B-2 SPIRIT	317	
		B-7 HONGZHA	318	
		1050E	319	
		A3 LEI MING	320	
		HARRIER GR4/7	321	
		TORNADO GR4	322	
		AV-8B HARRIER PLUS	323	
		CF-188 HORNET	324	
		RAFALE	325	
		UNDEFINED	326 THROUGH 510	
		BOMBER/ATTACK GENERAL	511	

		PATROL/RECON/ELECTRONIC/ TANKER/GENERAL		

		E-2 HAWKEYE	512	
		E-3 SENTRY (AWACS)	513	
		E-4 NEACP	514	
		EA-3	515	
		EA-6 PROWLER	516	
		EB-57 (DOUGLAS)	517	
		EC-130 HERCULES	518	
		EC-135 (BOEING)	519	
		EF-4 WILD WEASEL	520	
		EF-111 (GENERAL DYNAMICS)	521	
		EP-3 ORION	522	
		KA-3 (DOUGLAS)	523	
		KA-6 (GRUMMAN)	524	
		KC-10 EXTENDER	525	
		KC-130 HERCULES	526	
		KC-135 STRATOTANKER	527	
		O-1 BIRD DOG	528	

FIELD CODING FOR J14.2C5

(SHEET 12)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		O-2 (CESSNA)	529	
		OV-1 MOHAWK	530	
		OV-10 BRONCO	531	
		P-2 NEPTUNE	532	
		P-3 ORION	533	
		RC-130 HERCULES	534	
		RC-135 (BOEING)	535	
		RF-4 PHANTOM II	536	
		RF-5 (NORTHROP)	537	
		RF-8 CRUSADER	538	
		RF-14 TOMCAT	539	
		RF-104 STARFIGHTER	540	
		RP-3 ORION	541	
		RU-21 UTE	542	
		S-2 TRACKER	543	
		S-3 VIKING	544	
		SR-71 BLACKBIRD	545	
		U-2 (LOCKHEED)	546	
		U-4 AERO COMMANDER	547	
		U-5 H-500 TWIN	548	
		U-8 SEMINOLE	549	
		U-10 COURIER	550	
		UC-12 HURON	551	
		U-21 UTE	552	
		US-3 VIKING	553	
		OA-37 DRAGONFLY	554	
		TR-1	555	
		WC-130 HERCULES	556	
		E-1 TRACER	557	
		EB-66	558	
		EC-121	559	
		RA-3	560	
		SEA SCAN	561	
		FALCON 20 GUARDIAN	562	
		BR 1150 ATL1	563	
		RF-35XD DRAKEN	564	
		BN-2 MARITIME DEFENDER	565	
		DISUSED	566 THROUGH 567	
		CP-140 AURORA	568	
		HS.748 COASTGUARDER	569	
		HS.801 NIMROD	570	
		DISUSED	571	
		MK.3	572	

FIELD CODING FOR J14.2C5

(SHEET 13)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		RJ-1 HAWK	573	
		RJ-1 JAESTREB	574	
		SS-2	575	
		PEACE SENTINEL	576	
		KC-97	577	
		AU-24	578	
		AU-23	579	
		U-21	580	
		U-17	581	
		HU-16	582	
		U-9	583	
		U-3	584	
		RU-21	585	
		NKC-135	586	
		RF-101	587	
		RF-111	588	
		RB-57	589	
		RB-66	590	
		RC-121	591	
		BE-12 MAIL	592	
		IL-38 MAY	593	
		TU-126 MOSS	594	
		BE-6	595	
		VC-10 (TANKER)	596	
		AN-12 CUB-A (ELINT)	597	
		AN-12 CUB-C (EA)	598	
		AN-12 CUB-D (EA)	599	
		IL-20 COOT-A (ELINT)	600	
		IL-76 MAINSTAY	601	
		E-8 (J STARS)	602	
		TORNADO ECR	603	
		E-6 MERCURY	604	
		EMB-111	605	
		MU-2S	606	
		A40 ALBATROS	607	
		BE42 ALBATROS	608	
		CL215 AMPHIBIAN	609	
		IAI 1125	610	
		IL22 COOT B	611	
		J32 LANSEN	612	
		SH5 HARBIN	613	
		TIER1	614	
		TIER2	615	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		TIER3	616	
		US1 (SHIN)	617	
		C-212 CASA	618	
		CESSNA 550 CITATION II	619	
		CESSNA 560 CITATION V	620	
		CL 215 CANADAIR	621	
		DORNIER 27	622	
		F-27 FOKKER	623	
		NIMROD MRA4	624	
		CP-140A AURORA/ARCTURUS	625	
		RC-135 RIVET JOINT	626	
		ATL 2	627	
		ETENDARD IV P	628	
		ALIZE	629	
		FALCON 50	630	
		MIRAGE IV	631	
		MIRAGE 2000	632	
		BR 1150 GE ATL ASW	633	
		BR 1150 GE ATL SIGINT	634	
		C-130 HERCULES TANKER	635	
		ASTOR	636	
		UNDEFINED	637 THROUGH 761	
		TANKER	762	
		RECONNAISSANCE (RECON)	763	
		ELECTRONIC WARFARE (EW)	764	
		ASW	765	
		AEW AND C	766	
		MISCELLANEOUS GENERAL	767	

		TRAINER		

		T-2 BUCKEYE	768	
		T-28 TROJAN	769	
		T-29 (CONVAIR)	770	
		T-34 MENTOR	771	
		T-37 TWEET	772	
		T-38 TALON	773	
		T-39 SABERLINER	774	
		T-41 MESCALERO	775	
		T-42 CONCHISE	776	
		T-43 (BOEING)	777	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		T-44 KING AIR	778	
		TA-4 SKYHAWK	779	
		TA-7 CORSAIR II	780	
		T-33	781	
		ALPHA JET	782	
		B3LA (SAAB)	783	
		C-101 AVIOJET	784	
		G2-A GALEB	785	
		G2-A SEAGULL	786	
		L-29 DELFIN	787	
		L-29 MAYA	788	
		L-39 ALBATROS	789	
		L-70 MILTRAINER	790	
		L-450	791	
		P.55 (PARTENAVIA)	792	
		T-2 (MITSUBISHI)	793	
		CM 170 MAGISTER	794	
		M.B.339 (AERMACCHI)	795	
		T-2 (MITSUBISHI)	796	
		CM AU/ MAGISTER	797	
		M.B.339 (AERMACCHI)	798	
		SF-260 (SIAI-MARCHETTI)	799	
		SH 37 VIGGEN	800	
		QH-50 DRAKEN	801	
		SK 37 VIGGEN	802	
		SK 60 (SAAB)	803	
		TB30 EPSILON	804	
		TF-35XD	805	
		TJ-1 HAWK	806	
		TJ-1 JASTRAEB	807	
		TS.11 SPARK	808	
		AW1-2 FAN TRAINER	809	
		DISUSED	810	
		HJT-16 KIRAN	811	
		MBB223 FLAMINGO	812	
		SU-11 MAIDEN	813	
		SU-15	814	
		MIG-15 MIDGET	815	
		MIG-17	816	
		MIG-21 MONGOL	817	
		MIG-23	818	
		MIG-25	819	
		YAK-11 MOOSE	820	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		YAK-18 MAX	821	
		YAK-28 MAESTRO	822	
		TF-104 STARFIGHTER	823	
		T-46A	824	
		EMB-312 TOUCAN	825	
		T-45 GOSHAWK	826	
		T-47	827	
		AS202	828	
		CT114 TUTOR	829	
		G91T (FIAT JET 1)	830	
		K8 (NAMC)	831	
		L70 VINKA	832	
		STRIKEMASTER (BAE)	833	
		T1 JAYHAWK	834	
		T4 (KAWASAKI)	835	
		CT-142 DASH 8	836	
		B-55 BARON	837	
		F-33 BONANZA	838	
		839 PILLAN-TAMIZ	839	
		CT-133 SILVERSTAR	840	
		UNDEFINED	841 THROUGH 1022	
		TRAINER GENERAL	1023	

		TRANSPORT/AIRLINER		

		C-1 (GRUMMAN COD)	1024	
		C-2 GREYHOUND	1025	
		C-5 GALAXY	1026	
		C-7 CARIBOU	1027	
		C-9 NIGHTINGALE	1028	
		C-12 HURON	1029	
		C-123 PROVIDER	1030	
		C-130 HERCULES	1031	
		C-135 STRATOLIFTER	1032	
		C-140 JETSTAR	1033	
		C-141 STARLIFTER	1034	
		HC-130 HERCULES	1035	
		VC-6 KING AIR	1036	
		VC-9 SKYTRAIN II	1037	
		VC-11 GULFSTREAM	1038	
		VC-137 (BOEING)	1039	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		707 (BOEING)	1040	
		720 (BOEING)	1041	
		727 (BOEING)	1042	
		737 (BOEING)	1043	
		747 (BOEING)	1044	
		757 (BOEING)	1045	
		767 (BOEING)	1046	
		L-100 HERCULES	1047	
		L-1011 TRI STAR	1048	
		DC-8 (DOUGLAS)	1049	
		DC-9 (DOUGLAS)	1050	
		DC-10 (DOUGLAS)	1051	
		C-119	1052	
		DC-130	1053	
		HC-97	1054	
		C-JM	1055	
		C-54	1056	
		C-97	1057	
		C-118	1058	
		C-119	1059	
		C-121	1060	
		C-124	1061	
		C-131	1062	
		C-133	1063	
		VC-47	1064	
		CV-54	1065	
		CV-140	1066	
		ARAVA	1067	
		CONCORDE	1068	
		ISLANDER	1069	
		SKYVAN	1070	
		TRIDENT	1071	
		A300 AIRBUS	1072	
		A310 AIRBUS	1073	
		C-1 (KAWASKI)	1074	
		C-160 TRANSALL	1075	
		C.207 AZOR	1076	
		C-212 AVIOCAR	1077	
		F27 FRIENDSHIPS	1078	
		F28 FELLOWSHIP	1079	
		G222 SAMA	1080	
		AW.660 ARGOSY	1081	
		BAC111 ONE-ELEVEN	1082	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	
		DHC-5 BUFFALO	1083	
		DHC-7 DASH	1084	
		AN-2 COLT	1085	
		AN-10 CAT	1086	
		AN-12 CUB	1087	
		AN-14 CLOD	1088	
		AN-22 COCK	1089	
		AN-24 COKE	1090	
		AN-26 CURL	1091	
		AN-28 CASK	1092	
		AN-30 CLANK	1093	
		AN-32 CLINE	1094	
		AN-40 (VERY LARGE TURBO-PROP)	1095	
		AN-72 COALER	1096	
		IL-12 COACH	1097	
		IL-18 COOT	1098	
		IL-62 CLASSIC	1099	
		IL-76 CANDID	1100	
		IL-86 CAMBER	1101	
		TU-114 CLEAT	1102	
		TU-134 CRUSTY	1103	
		TU-144 CHARGER	1104	
		TU-154 CARELESS	1105	
		YAK-40 CODDLING	1106	
		YAK-42 CLOBBER	1107	
		TU-104	1108	
		YAK-27	1109	
		IL-38	1110	
		DISUSED	1111	
		DO-228 LT (TRANSPORT)	1112	
		DISUSED	1113	
		AN-74	1114	
		AN-124 CONDOR	1115	
		A320 AIRBUS	1116	
		A321 AIRBUS	1117	
		A330 AIRBUS	1118	
		A340 AIRBUS	1119	
		AN-70	1120	
		AN-225 COSSACK	1121	
		BAE-125-600	1122	
		BAE146	1123	
		777 (BOEING)	1124	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		C-17 GLOBEMASTER III	1125	
		C-20 GULFSTREAM 3/4	1126	
		C-21 LEARJET 35	1127	
		C-22	1128	
		C-23 SHERPA/SHORTS 330	1129	
		C-26 METRO 3	1130	
		YS 11 (NAMC)	1131	
		CL-600 CHALLENGER	1132	
		CL-601 CHALLENGER	1133	
		CN-235M (AIRTECH)	1134	
		EMB-120 BRASILLIA ADV	1135	
		EMB-145 AMAZON	1136	
		IL-78 MIDAS	1137	
		MD-11	1138	
		MD-80	1139	
		MD-90	1140	
		PD-808	1141	
		TU-44	1142	
		V-22 OSPREY	1143	
		VC-25	1144	
		XC-2	1145	
		1124 (IAI)	1146	
		1900 (BEECH)	1147	
		330 (SHORTS)	1148	
		580 (CONVAIR)	1149	
		ATR42	1150	
		B55 BARON	1151	
		BN2 ISLANDER	1152	
		C46 COMMANDO	1153	
		CARAVELL (SUD)	1154	
		CC109 (CANADAIR)	1155	
		CHALLENGER (CANADAIR)	1156	
		DHC2	1157	
		DHC6 TWIN OTTER	1158	
		DHC8	1159	
		EMB110 BANDEIRANTE	1160	
		EMB121	1161	
		FALCON 200/FALCON 20	1162	
		FALCON 50	1163	
		FALCON 900	1164	
		FH227 FRIENDSHIP	1165	
		FOKKER 100	1166	
		FOKKER 50	1167	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		FOKKER 60	1168	
		FOKKER 70	1169	
		GROB G850	1170	
		GULFSTREAM 1	1171	
		GULFSTREAM 2	1172	
		JETSTREAM	1173	
		JETSTREAM 31	1174	
		KING AIR	1175	
		L410 TURBOJET	1176	
		LEARJET 23	1177	
		LEARJET 24	1178	
		LEARJET 25 (IMPROVED VER	1179	
		28)		
		LEARJET 35/36	1180	
		LEARJET 55 (IMPROVED VER	1181	
		28)		
		LEARJET 60	1182	
		MERLIN 2	1183	
		MERLIN 3	1184	
		MERLIN 4	1185	
		METRO 3	1186	
		SAAB 2000	1187	
		SAAB 340	1188	
		SABRELINER	1189	
		U6 BEAVER	1190	
		VISCOUNT	1191	
		W3 SOKOL	1192	
		Y11 (HAMC)	1193	
		Y12 (HAMC)	1194	
		Y5	1195	
		CC-115 BUFFALO	1196	
		CC-130 HERCULES	1197	
		CC-150 POLARIS	1198	
		C-235 CASA	1199	
		CC-138 TWIN OTTER	1200	
		DO-228 LM (POLLUTION	1201	
		CONTROL)		
		UNDEFINED	1202 THROUGH 1277	
		LIGHT CIVIL	1278	
		TRANSPORT/AIRLINER	1279	
		GENERAL		

FIELD CODING FOR J14.2C5

(SHEET 21)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		HELICOPTERS		

		AH-1 COBRA	1280	
		AH-64 APACHE	1281	
		CH-3 (SIKORSKY)	1282	
		CH-46 (SEA KNIGHT)	1283	
		CH-47 CHINOOK	1284	
		CH-53 SEA STALLION	1285	
		CH-54 LARKE (SKYCRANE)	1286	
		EH-60 QUICK FOX	1287	
		HH-1 IROQUOIS	1288	
		HH-2 SEA SPRITE	1289	
		HH-3 JOLLY GREEN	1290	
		HH-52 (SIKORSKY)	1291	
		HH-53 (SIKORSKY)	1292	
		OH-6 (HUGHES)	1293	
		OH-58 KIOWA	1294	
		RH-3 SEA KING	1295	
		RH-53 (SIKORSKY)	1296	
		SH-2 SEA SPRITE	1297	
		SH-3 SEA KING	1298	
		SH-60 SEA HAWK	1299	
		UH-1 IROQUOIS	1300	
		UH-2 SEA SPRITE	1301	
		UH-12 (HILLER)	1302	
		UH-46 (BOEING)	1303	
		UH-60 BLACK HAWK	1304	
		CH-2U	1305	
		HH-43	1306	
		A109 (AGUSTA)	1307	
		A129 MONGOOSE	1308	
		B0-105 (MBB)	1309	
		DISUSED	1310	
		CH-124 SEA KING	1311	
		DISUSED	1312 THROUGH 1314	
		SA 315 LAMA	1315	
		DISUSED	1316	
		DISUSED	1317	
		SA 321 SUPER FRELON	1318	
		SA 330 PUMA	1319	
		SA 332 SUPER PUMA	1320	

FIELD CODING FOR J14.2C5

(SHEET 22)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		S 342 GAZELLE	1321	
		SA 350 ASTAR	1322	
		SA 360 DAUPHIN	1323	
		SA 361 DAUPHIN	1324	
		WG-13 LYNX	1325	
		WG-34 (WESTLAND)	1326	
		KA-18 HOG	1327	
		KA-20 HARP	1328	
		KA-25 HORMONE	1329	
		KA-26 HOODLUM	1330	
		MI-1 HARE	1331	
		MI-2 HOPLITE	1332	
		MI-4 HOUND	1333	
		MI-6 HOOK	1334	
		MI-8 HIP	1335	
		MI-10 HARKE	1336	
		MI-12 HOMER	1337	
		MI-14 HAZE	1338	
		MI-24 HIND	1339	
		MI-26 HALO	1340	
		CH-53E SUPER STALLION	1341	
		MH-53E SEA DRAGON	1342	
		HH-60 NIGHT HAWK	1343	
		HH-65A DOLPHIN	1344	
		KA-27 HELIX-A (ASW)	1345	
		KA-32 HELIX	1346	
		MI-17 HIP-H	1347	
		MI-28 HAVOC	1348	
		ECUREUIL/FENNEL/ESQILO	1349	
		KA-29 HELIX-B	1350	
		KA-50 HOKUM	1351	
		204 BELL	1352	
		205 BELL	1353	
		206 BELL	1354	
		214 BELL	1355	
		280 ENSTROM	1356	
		300 SCHWEIZER	1357	
		406 COMBAT SCOUT	1358	
		A 109 HIRUNDO	1359	
		A 129 MANGUSTA	1360	
		AH 6 CAYUSE	1361	
		ALOUETTE 2	1362	
		ALOUETTE 3	1363	

5.3-527

MIL-STD-6016B

FIELD CODING FOR J14.2C5

(SHEET 23)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		AS 350 ECUREUIL	1364	
		AS 532 COUGAR	1365	
		AS 550 FENNEC	1366	
		AS 555 FENNEC	1367	
		AS 565 PANTHER	1368	
		CH 34 WESTLAND	1369	
		EH 101	1370	
		HAS 1 WASP	1371	
		KA-28 HELIX A	1372	
		MD 500 DEFENDER	1373	
		MI 22	1374	
		MI 25	1375	
		MI 35	1376	
		MI 9	1377	
		SA 341 GAZELLE	1378	
		SA 342 GAZELLE	1379	
		SA 365 DAUPHIN 2	1380	
		TS11 ISKRA	1381	
		WESSEX	1382	
		Z9 (HARBIN)	1383	
		CH-146 GRIFFON	1384	
		SEA KING AEW (SKW)	1385	
		EH 101 MERLIN	1386	
		AB-212 AUGUSTA BELL	1387	
		BO-105 BOLKOW	1388	
		CH-47 CHINOOK	1389	
		HUGHES 500	1390	
		HUGHES 3000	1391	
		SH-3D SIKORSKY	1392	
		SH-70L SIKORSKY	1393	
		CH-113 LABRADOR	1394	
		NH 90 (C2)	1395	
		NH 90 (RECCE)	1396	
		NH 90 (EW/SEAD)	1397	
		NH 90 (TRANSPORT)	1398	
		SEA LYNX MK88A	1399	
		SEA KING MK41 (KWS)	1400	
		TIGER (HAP)	1401	
		NH 90 (NAVY)	1402	
		TIGER (HAC)	1403	
		SA 341 GAZELLE CANON	1404	
		AS 532 COUGAR HORIZON	1405	
		AW-520 SAR CORMORANT	1406	

5.3-528

MIL-STD-6016B

FIELD CODING FOR J14.2C5

(SHEET 24)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		UNDEFINED	1407 THROUGH 1534	
		HELICOPTER GENERAL	1535	

		AIR-AIR MISSILES		

		AIM-4A FALCON	1536	
		AIM-7 SPARROW	1537	
		AIM-9 SIDEWINDER	1538	
		AIM-54 PHOENIX	1539	
		AIM-2A GENIE	1540	
		AIM-120 AMRAAM	1541	
		ASLAM	1542	
		R.530	1543	
		R.550 MAGIC	1544	
		S.530 SUPER 530	1545	
		ASPIDER	1546	
		DISUSED	1547	
		SHAFRIR	1548	
		SKY FLASH	1549	
		DISUSED	1550	
		AA-2 ATOLL	1551	
		AA-3 ANAB	1552	
		AA-5 ASH	1553	
		AA-6 ACRID	1554	
		AA-7 APEX	1555	
		AA-8 APHID	1556	
		AAM	1557	
		AA-9 AMOS	1558	
		AA-XP-1/2	1559	
		AQM-34	1560	
		AQM-91	1561	
		BGM-34 FIREBEE/MQM34	1562	
		YQM-94	1563	
		YQM-98	1564	
		AIM-132 ASRAAM	1565	
		MICA	1566	
		PL-2A	1567	
		PL-5B	1568	
		PL-7	1569	
		PL-9	1570	
		PYTHON 3	1571	

5.3-529

MIL-STD-6016B

FIELD CODING FOR J14.2C5

(SHEET 25)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		PYTHON 4	1572	
		AA-10 ALAMO	1573	
		AA-11 ARCHER	1574	
		AA-12 ADDER	1575	
		AA-1 ALKALI	1576	
		AAM-1	1577	
		UNDEFINED	1578 THROUGH 1790	
		AIR-TO-AIR MISSILE	1791	
		GENERAL		

		AIR-GROUND/GROUND-		
		GROUND MISSILES		

		AGM-45 SHRIKE	1792	
		AGM-65 MAVERICK	1793	
		AGM-69 SRAM	1794	
		AGM-78 STANDARD ARM	1795	
		AGM-84 HARPOON	1796	
		AGM-86 ALCM	1797	
		AGM-88 HARM	1798	
		AGM-109 TOMAHAWK	1799	
		AM 39 EXOCET	1800	
		AGM-119 PENGUIN	1801	
		AS 11 KILTER	1802	
		AS 12 KEGLER	1803	
		AS 15 KENT	1804	
		AS 30	1805	
		DISUSED	1806	
		RB 05	1807	
		RB 08	1808	
		ADVANCED ASM	1809	
		AS-1 KENNEL	1810	
		AS-2 KIPPER	1811	
		AS-3 KANGAROO	1812	
		AS-4 KITCHEN	1813	
		AS-5 KELT	1814	
		AS-6 KINGFISH	1815	
		AS-7 KERRY	1816	
		DISUSED	1817	
		AS-10 KAREN	1818	
		AS-9 KYLE	1819	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		AS 34 KORMORAN	1820	
		ASM GABRIEL	1821	
		ASM SEA SKUA	1822	
		ASM SEA EAGLE	1823	
		ASMP	1824	
		AT-2 SWATTER	1825	
		AT-3 SAGGER	1826	
		AT-6 SPIRAL	1827	
		C-601	1828	
		C-611	1829	
		C-801	1830	
		C-802	1831	
		CSS-2	1832	
		CSS-3	1833	
		CSS-N-3	1834	
		CSS-X-4	1835	
		FL-2 SILKWORM	1836	
		FL-7	1837	
		HY-2	1838	
		HY-3	1839	
		M-9/11	1840	
		WS-1	1841	
		AS-13 KINGBOLT	1842	
		AS-14 KEDGE	1843	
		AS-16 KICKBACK	1844	
		AS-17 KRYPTON	1845	
		AS-18 KAZOO	1846	
		AT-4 SPIGOT	1847	
		AT-5 SPANDREL	1848	
		AT-7 SAXHORN	1849	
		AT-10 STABBER	1850	
		AT-11 SNIPER	1851	
		AT-12	1852	
		AT-13	1853	
		AT-14	1854	
		FROG-7	1855	
		SS-1 SCUD	1856	
		SS-11 SEGO	1857	
		SS-13 SAVAGE	1858	
		SS-18 SATAN	1859	
		SS-19 STILETTO	1860	
		SS-24 SCALPEL	1861	
		SS-25 SICKLE	1862	

FIELD CODING FOR J14.2C5

(SHEET 27)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		SS-N-2 STYX	1863	
		SS-N-3 SHADDOCK	1864	
		SS-N-6 SERB	1865	
		SS-N-7 STARBRIGHT	1866	
		SS-N-8 SAWFLY	1867	
		SS-N-9 SIREN	1868	
		SS-N-12 SANDBOX	1869	
		SS-N-18 STINGRAY	1870	
		SS-N-19 SHIPWRECK	1871	
		SS-N-20 STURGEON	1872	
		SS-N-21 SAMPSON	1873	
		SS-N-22 SUNBURN	1874	
		SS-N-23 SKIFF	1875	
		SS-N-26	1876	
		AGNI	1877	
		PRITHVI	1878	
		TOW	1879	
		AGM-114 HELLFIRE	1880	
		MLRS	1881	
		HOT	1882	
		MILAN	1883	
		TRIGAT	1884	
		OTOMAT	1885	
		RBS-15M	1886	
		ARMAT	1887	
		ALARM	1888	
		AGM-12 BULLPUP	1889	
		AGM-62A WALLEYE	1890	
		AGM-123A SKIPPER II	1891	
		APACHE (ASM)	1892	
		AS 8	1893	
		AT-1 SWATTER	1894	
		CAS1	1895	
		KH-41 MOSKIT	1896	
		MARTIN PESCADOR	1897	
		MAS1 CARCARA	1898	
		RB 04E	1899	
		STAR	1900	
		SEA INDIGO	1901	
		MM 38	1902	
		MM 40	1903	
		SM 39	1904	
		AS 34 KORMORAN II	1905	

5.3-532

MIL-STD-6016B

FIELD CODING FOR J14.2C5

(SHEET 28)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		UNDEFINED	1906 THROUGH 2046	
		AIR-GROUND MISSILE	2047	
		GENERAL		

		SURFACE TO AIR MISSILES		

		FIM-92 STINGER	2048	
		NIM-23 HAWK	2049	
		MIM-42 REDEYE	2050	
		MIM-72 CHAPARRAL	2051	
		MIM-104 PATRIOT	2052	
		RIM-2 TERRIER	2053	
		RIM-7 SEA SPARROW	2054	
		RIM-8 TALOS	2055	
		RIM-24 TARTAR	2056	
		RIM-66 STANDARD MISSILE	2057	
		RIM-67 STANDARD MISSILE	2058	
		BLOWPIPE	2059	
		DISUSED	2060 THROUGH 2061	
		SEA DART	2062	
		DISUSED	2063	
		SEA WOLF	2064	
		S 440 CROTALE EDIR	2065	
		RAPIER	2066	
		RBS-70 (SLM)	2067	
		DISUSED	2068	
		SAM ROLAND	2069	
		SA-2 GUIDELINE	2070	
		SA-3 GOA	2071	
		SA-4 GANEF	2072	
		SA-N-3 GOBLET	2073	
		SA-5 GAMMON	2074	
		SA-N-4 GECKO	2075	
		SA-6 GAINFUL	2076	
		SA-N-6 GRUMBLE	2077	
		SA-7 GRAIL	2078	
		SA-8 GECKO	2079	
		SA-9 GASKIN	2080	
		SA-10 GRUMBLE	2081	
		SA-11 GADFLY	2082	
		SA-12	2083	

5.3-533

MIL-STD-6016B

FIELD CODING FOR J14.2C5

(SHEET 29)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		SA-13 GOPHER	2084	
		MISTRAL	2085	
		SA-N-7 GADFLY	2086	
		SA-N-8 GREMLIN	2087	
		SA-14 GREMLIN	2088	
		SA-16 GIMLET	2089	
		SA-X-17	2090	
		SA-N-5 GRAIL	2091	
		SA-N-11 GRISOM	2092	
		SA-12A GLADIATOR	2093	
		SA-12B GIANT	2094	
		SA-14 GREMLIN	2095	
		SA-15 GAUNTLET	2096	
		SA-17 GRIZZLY	2097	
		SA-N-12 GRIZZLY	2098	
		SA-18 GROUSE	2099	
		SA-19 GRISOM	2100	
		RIM-116 RAM	2101	
		ADATS	2102	
		JAVELIN	2103	
		STARBURST	2104	
		STARSTREAK	2105	
		ASPIDER	2106	
		I-HAWK	2107	
		ROLAND II	2108	
		SM-2 BLOCK II	2109	
		SM-2 BLOCK III	2110	
		SM-2 BLOCK IIIA	2111	
		SM-2 BLOCK IIIB	2112	
		SM-2 BLOCK IV	2113	
		SM-2 BLOCK IVA	2114	
		SM-3 LEAP	2115	
		AKASH	2116	
		ANZA	2117	
		ANZA II	2118	
		CSA-1	2119	
		CSA-2	2120	
		CSA-4	2121	
		CSA-5	2122	
		FM-80	2123	
		HN-5	2124	
		NK-7	2125	
		NK-16	2126	

5.3-534

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

804	001	AIR SPECIFIC TYPE	(CONTINUED)	
-----	-----	-------------------	-------------	--

PANTZYR	2127
RAPIER 2000/JERNAS	2128
RBS-90	2129
SAKR	2130
SAVA	2131
SHANINE	2132
SKYGUARD ASPIDE	2133
SPADA	2134
TAM SAM	2135
TIGERCAT	2136
VANGUARD	2137
SA-N-1 GOA	2138
SA-N-9 GAUNTLET	2139
SA-N-10	2140
ALBATROS/ASPIDE	2141
SM-1	2142
VT1 CROTALE	2143
MASURCA	2144
ASTER 15	2145
ASTER 30	2146
UNDEFINED	2147 THROUGH 4093
RESET TO NO STATEMENT	4094
SURFACE-TO-AIR MISSILE	4095
GENERAL	

808	001	SURFACE (MARITIME) SPECIFIC TYPE	
-----	-----	----------------------------------	--

NO STATEMENT	0
CV GENERAL	1
CLEMENCEAU	2
ENTERPRISE	3
FORRESTAL	4
JOHN F KENNEDY	5
KITTY HAWK	6
MIDWAY	7
NIMITZ	8
CHARLES DE GAULLE	9
UNDEFINED	10 THROUGH 21
CVS GENERAL	22
DEDALO	23
MINAS GERAIS	24
VIKRANT	25

THE SPECIFIC TYPE OF POINT OR TRACK
WITH AN ENVIRONMENT/CATEGORY OF
SURFACE (MARITIME).

5.3-535

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		VEINTICINCO DE MAYO	26	
		VIRAAT	27	
		UNDEFINED	28 THROUGH 35	
		CVH GENERAL	36	
		GIUSEPPE GARIBALDI	37	
		INVINCIBLE	38	
		JEANNE D'ARC	39	
		KIEV	40	
		PRINCIPE DE ASTURIAS	41	
		UNDEFINED	42	
		KIEV (MODIFIED)	43	
		UNDEFINED	44 THROUGH 52	
		BB GENERAL	53	
		IOWA	54	
		UNDEFINED	55 THROUGH 64	
		CC GENERAL	65	
		SVERDLOV (MODIFIED)	66	
		UNDEFINED	67 THROUGH 76	
		CG GENERAL	77	
		ANDREA DORIA	78	
		BAINBRIDGE	79	
		BELKNAP	80	
		CALIFORNIA	81	
		UNDEFINED	82	
		KARA	83	
		KIROV	84	
		KRESTA I	85	
		KRESTA II	86	
		KYNDA	87	
		LEAHY	88	
		LONG BEACH	89	
		SLAVA	90	
		TICONDEROGA	91	
		TRUXTUN	92	
		VIRGINIA	93	
		VITTORIO VENETO	94	
		UNDEFINED	95 THROUGH 118	
		CH GENERAL	119	
		MOSKVA	120	
		UNDEFINED	121 THROUGH 130	
		CA GENERAL	131	
		UNDEFINED	132	

FIELD CODING FOR J14.2C5

(SHEET 32)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		SVERDLOV	133	
		UNDEFINED	134 THROUGH 143	
		DD GENERAL	144	
		AKIZUKI	145	
		ALLEN M SUMNER	146	
		ALLEN M SUMNER FRAM II	147	
		ALMIRANTE	148	
		AMATSUKAZE	149	
		ANIMOSO	150	
		ANSHAN	151	
		ARLEIGH BURKE	152	
		ASAGARI	153	
		UNDEFINED	154	
		AUDACE	155	
		AYANAMI	156	
		DISUSED	157	
		CARPENTER FRAM I	158	
		CHARLES F ADAMS (MOD)	159	
		CHARLES F ADAMS	160	
		COONTZ	161	
		DISUSED	162 THROUGH 163	
		UNDEFINED	164	
		FLETCHER	165	
		FORREST SHERMAN (MOD) & HULL	166	
		FRIESLAND	167	
		GEARING FRAM I	168	
		GEARING FRAM II	169	
		UNDEFINED	170	
		DISUSED	171	
		HARUNA	172	
		HATAKAZE	173	
		HATSUYUKI	174	
		IMPAVIDO	175	
		KANIN	176	
		KASHIN (MODIFIED)	177	
		KASHIN	178	
		KASHIN II	179	
		KIDD	180	
		UNDEFINED	181	
		KILDIN (MODIFIED)	182	
		KOTLIN	183	

5.3-537

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		KOTLIN (MODIFIED)	184	
		LUDA (TYPE 051)	185	
		MEKO 360	186	
		MINEGUMO	187	
		PROJECT 15	188	
		ROBERT H SMITH	189	
		ROGER D LAURIA	190	
		SAM KOTLIN	191	
		SHIRANE	192	
		SKORY	193	
		SOVREMENYY	194	
		SPRUANCE	195	
		SUFFREN	196	
		TACHIKAZE	197	
		TAKATSUKI	198	
		TYPE 42	199	
		DISUSED	200	
		DISUSED	201	
		TYPE F-70 (AAW)	202	
		TYPE F-70 (ASW)	203	
		TYPE F-67	204	
		UNDEFINED	205 THROUGH 206	
		TYPE T-53 (MODIFIED-ASW)	207	
		UNDEFINED	208	
		UDALOY	209	
		YAMAGUMO	210	
		Z	211	
		IROQUOIS	212	
		UNDEFINED	213 THROUGH 276	
		DE GENERAL	277	
		UNDEFINED	278	
		CASTLE	279	
		UNDEFINED	280 THROUGH 295	
		FF GENERAL	296	
		ALMIRANTE CLEMENTE	297	
		ALMIRANTE PEREIRA DA SILVA	298	
		ALPINO	299	
		DISUSED	300 THROUGH 301	
		BALEARES	302	
		BAPTISTA DE ANDRADE	303	
		UNDEFINED	304	

FIELD CODING FOR J14.2C5

(SHEET 34)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		BERK	305	
		BLACK SWAN	306	
		BROADSWORD (TYPE 22)	307	
		BRONSTEIN	308	
		BROOKE	309	
		CANNON	310	
		CHARLES LAWRENCE	311	
		CHENGDU	312	
		CHIKUGO	313	
		COMANDANTE JOAO BELO	314	
		UNDEFINED	315	
		CROSLEY	316	
		DEALEY	317	
		DESCUBIERTA	318	
		DUKE (TYPE 23)	319	
		DURANGO	320	
		EDSALL	321	
		GARCIA	322	
		GLOVER	323	
		GODAVARI	324	
		GRISHA I	325	
		GRISHA II	326	
		GRISHA III	327	
		UNDEFINED	328	
		GRISHA V	329	
		UNDEFINED	330	
		HVIDBJORNEN	331	
		ISHKARI	332	
		ISUZU	333	
		JACOB VAN HEEMSKERCK	334	
		JIANGDONG (TYPE 053J)	335	
		JIANGHU (TYPE 053H)	336	
		JIANGNAN	337	
		JOAO COUTINHO	338	
		KAREL DOORMAN	339	
		KNOX	340	
		DISUSED	341	
		KONI	342	
		KORTENAER	343	
		KRIVAK I	344	
		KRIVAK II	345	
		KRIVAK III	346	

5.3-539

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		LA FAYETTE	347	
		DISUSED	348	
		LEOPARD	349	
		LUPU	350	
		M	351	
		DISUSED	352	
		MAESTRALE	353	
		MEKO 140 TYPE	354	
		MEKO 200 TYPE	355	
		MIRKA I	356	
		MIRKA II	357	
		NIELS JUEL	358	
		NITEROI	359	
		OLIVER HAZARD PERRY	360	
		OSLO	361	
		PEDER SKRAM	362	
		PETYA I (MODIFIED)	363	
		PETYA I	364	
		PETYA II (MODIFIED)	365	
		PETYA II	366	
		PETYA III	367	
		UNDEFINED	368	
		DISUSED	369	
		RIGA	370	
		RIVER	371	
		BRANDENBURG (TYPE 123)	372	
		RUDDEROW	373	
		SACHSEN (TYPE 124)	374	
		SAVAGE	375	
		DISUSED	376	
		TROMP	377	
		TYPE A 69	378	
		TYPE F-2000S	379	
		UNDEFINED	380 THROUGH 381	
		YUBARI	382	
		BREMEN (TYPE 122)	383	
		CLAUDE JONES	384	
		FFG 7	385	
		HALIFAX	386	
		NAJIN	387	
		PRESIDENT	388	
		SANTA MARIA	389	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		VOSPER MK 5	390	
		VOSPERTHORNYCROFT MK 7	391	
		WIELINGEN	392	
		FLOREAL	393	
		COMMANDANT BORY	394	
		UNDEFINED	395 THROUGH 478	
		FS GENERAL	479	
		ALBATROS	480	
		AUK CLASS	481	
		DE CRISTOFARO	482	
		DISUSED	483	
		MINERVA	484	
		NANUCHKA I	485	
		NANUCHKA II	486	
		NANUCHKA III	487	
		DISUSED	488	
		PF-103	489	
		SAAR 5	490	
		SLEIPNER	491	
		TARANTUL I	492	
		TARANTUL II	493	
		DISUSED	494	
		WADI	495	
		UNDEFINED	496 THROUGH 517	
		LL GENERAL	518	
		UNDEFINED	519 THROUGH 528	
		LCC GENERAL	529	
		BLUE RIDGE	530	
		CAVEZZALE	531	
		UNDEFINED	532 THROUGH 540	
		LKA GENERAL	541	
		CHARLESTON	542	
		UNDEFINED	543 THROUGH 552	
		LFS GENERAL	553	
		UNDEFINED	554 THROUGH 563	
		LHA GENERAL	564	
		TARAWA	565	
		UNDEFINED	566 THROUGH 575	
		LHD GENERAL	576	
		WASP	577	
		UNDEFINED	578 THROUGH 587	
		LPA GENERAL	588	

FIELD CODING FOR J14.2C5

(SHEET 37)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		UNDEFINED	589 THROUGH 598	
		LPD GENERAL	599	
		AUSTIN	600	
		FEARLESS	601	
		IVAN ROGOV	602	
		UNDEFINED	603	
		RALEIGH	604	
		SAN GIORGIO	605	
		UNDEFINED	606 THROUGH 615	
		LPH GENERAL	616	
		IWO JIMA	617	
		UNDEFINED	618 THROUGH 627	
		LSD GENERAL	628	
		ANCHORAGE	629	
		ASHLAND	630	
		CABILDO	631	
		OURAGAN	632	
		FOUDRE	633	
		THOMASTON	634	
		WHIDBEY ISLAND	635	
		UNDEFINED	636 THROUGH 646	
		LSL GENERAL	647	
		SIR GERAINT	648	
		UNDEFINED	649 THROUGH 657	
		LSM GENERAL	658	
		ASHDOD	659	
		BATRAL	660	
		CAKABEY	661	
		EDIC I	662	
		EDIC II	663	
		LSM-1	664	
		MP-4	665	
		POLNOCHNY	666	
		POLOCHNY A	667	
		POLOCHNY B	668	
		POLOCHNY C	669	
		POLOCHNY D	670	
		YUDAO	671	
		YULING	672	
		BOUGAINVILLE	673	
		UNDEFINED	674 THROUGH 687	
		LST GENERAL	688	

5.3-542

MIL-STD-6016B

FIELD CODING FOR J14.2C5

(SHEET 38)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		ALLIGATOR	689	
		ATSUMI	690	
		UNDEFINED	691	
		BROOKE MARINE 93M	692	
		CAKABEY NL-122	693	
		CNIM PS 700	694	
		DE SOTO COUNTY	695	
		DISUSED	696	
		HENGAM	697	
		LST 1-510	698	
		LST 511-1152	699	
		MIURA	700	
		NEWPORT	701	
		ROPUCHA	702	
		SARUCABEY	703	
		CNGF	704	
		OCEAN	705	
		ALBION	706	
		TERREBONNE PARISH	707	
		TOBRUK	708	
		UNDEFINED	709	
		YUKAN	710	
		UNDEFINED	711 THROUGH 730	
		LSV GENERAL	731	
		UNDEFINED	732 THROUGH 741	
		LC GENERAL	742	
		UNDEFINED	743 THROUGH 751	
		LCM GENERAL	752	
		CTM 1	753	
		HUNGNAM	754	
		LCM 1057/1058	755	
		LCM 6	756	
		LCM 8	757	
		T-4	758	
		TSAPLYA	759	
		LCM (TYPE 521)	760	
		UNDEFINED	761 THROUGH 772	
		LCP GENERAL	773	
		DISUSED	774	
		LCM 1031	775	
		LCM 1035/1036	776	
		LCM 1055/1056	777	

5.3-543

MIL-STD-6016B

FIELD CODING FOR J14.2C5

(SHEET 39)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		NAMPO	778	
		UNDEFINED	779 THROUGH 788	
		LCPL GENERAL	789	
		UNDEFINED	790 THROUGH 799	
		LWC GENERAL	800	
		UNDEFINED	801 THROUGH 810	
		LCU GENERAL	811	
		BALIKPAPAN	812	
		BOMBARDA	813	
		BRAILA	814	
		LCU (TYPE 520)	815	
		DISUSED	816	
		DISUSED	817	
		DISUSED	818	
		DSM-501	819	
		HANCHON	820	
		HANTAE	821	
		KISHON	822	
		KVALSUND	823	
		LCT MK 5	824	
		LCT MK 6	825	
		LCU 501	826	
		MFP D-3	827	
		MZ	828	
		REINOYSUND	829	
		SMB-1	830	
		TU 57-M	831	
		US LCU 1466	832	
		VYDRA	833	
		YURA	834	
		UNDEFINED	835 THROUGH 866	
		LCVP GENERAL	867	
		UNDEFINED	868 THROUGH 877	
		LCAC GENERAL	878	
		AIST	879	
		GUS	880	
		LEBED	881	
		UTENOK	882	
		WELLINGTON BH-7 MK 4	883	
		WELLINGTON BH-7 MK 5	884	
		WINCHESTER (SR.N6)	885	
		UNDEFINED	886 THROUGH 896	

5.3-544

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		MM GENERAL	897	
		ALESHA	898	
		ALVSBORG	899	
		BORGEN	900	
		CARLSKRONA	901	
		COSAR	902	
		FALSTER	903	
		FURUSUND (MUL-20)	904	
		LANGELAND	905	
		LINDORMEN	906	
		LSM-1 (MODIFIED)	907	
		MUL-11	908	
		MUL-12	909	
		DISUSED	910	
		SMITH	911	
		US YMP	912	
		VIDAR	913	
		UNDEFINED	914 THROUGH 935	
		MCS GENERAL	936	
		UNDEFINED	937 THROUGH 946	
		MCJ GENERAL	947	
		UNDEFINED	948 THROUGH 957	
		MCD GENERAL	958	
		KINGSTON	959	
		MUEHLHAUSEN MCD (TYPE 742A)	960	
		UNDEFINED	961 THROUGH 968	
		MCM GENERAL	969	
		UNDEFINED	970 THROUGH 979	
		MH GENERAL	980	
		UNDEFINED	981 THROUGH 990	
		MHO GENERAL	991	
		UNDEFINED	992 THROUGH 1001	
		MHC GENERAL	1002	
		ADJUTANT (MODIFIED)	1003	
		AGGRESSIVE	1004	
		CIRCE	1005	
		WEIDEN MHC (TYPE 332)	1006	
		KOBLENZ MHC (TYPE 331B)	1007	
		HAM	1008	
		HUNT	1009	
		LANDSORT	1010	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		LERICI	1011	
		MSC 50	1012	
		MSO 218	1013	
		MSO 503	1014	
		SAUDA	1015	
		SIRIUS	1016	
		DISUSED	1017	
		TRIPARTITE	1018	
		VANYA I	1019	
		SANDOWN (SRMH)	1020	
		UNDEFINED	1021 THROUGH 1029	
		MHSC GENERAL	1030	
		MARS	1031	
		UNDEFINED	1032 THROUGH 1043	
		MHI GENERAL	1044	
		BAY	1045	
		UNDEFINED	1046 THROUGH 1054	
		MHA GENERAL	1055	
		UNDEFINED	1056 THROUGH 1065	
		ML GENERAL	1066	
		UNDEFINED	1067 THROUGH 1076	
		MLC GENERAL	1077	
		CURLEW	1078	
		UNDEFINED	1079 THROUGH 1088	
		MLI GENERAL	1089	
		UNDEFINED	1090 THROUGH 1099	
		MLO GENERAL	1100	
		UNDEFINED	1101 THROUGH 1110	
		MLR GENERAL	1111	
		UNDEFINED	1112 THROUGH 1121	
		MLA GENERAL	1122	
		UNDEFINED	1123 THROUGH 1132	
		MLS GENERAL	1133	
		UNDEFINED	1134 THROUGH 1143	
		MS GENERAL	1144	
		UNDEFINED	1145 THROUGH 1154	
		MSF GENERAL	1155	
		EX-ERIMO	1156	
		K-8	1157	
		KROGULEC	1158	
		M-40	1159	
		MSO-421	1160	

FIELD CODING FOR J14.2C5

(SHEET 42)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		NATYA I	1161	
		NATYA II	1162	
		RIVER	1163	
		T-43	1164	
		YURKA	1165	
		UNDEFINED	1166 THROUGH 1180	
		MSO GENERAL	1181	
		ACME	1182	
		AGGRESSIVE	1183	
		UNDEFINED	1184 THROUGH 1193	
		MSC GENERAL	1194	
		136 FT	1195	
		ADJUTANT	1196	
		ARKOE	1197	
		BAY	1198	
		DOKKUM	1199	
		HATSUSHIMA	1200	
		HAYASE	1201	
		DISUSED	1202	
		KOUZJ	1203	
		LENIWKA	1204	
		HAMELN MSC (TYPE 343)	1205	
		MSC 268	1206	
		MSC 292	1207	
		MSC 294	1208	
		NOTEC	1209	
		SASHA	1210	
		SAUDA	1211	
		DISUSED	1212	
		DISUSED	1213	
		SONYA	1214	
		T-301	1215	
		T-43	1216	
		TAKAMI	1217	
		DISUSED	1218	
		VANYA	1219	
		VANYA I	1220	
		VANYA II	1221	
		WUSONG	1222	
		ZHENYA	1223	
		UNDEFINED	1224 THROUGH 1263	
		MSI GENERAL	1264	

5.3-547

MIL-STD-6016B

FIELD CODING FOR J14.2C5

(SHEET 43)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		DISUSED	1265	
		AUX MINESWEEPER NO 1	1266	
		CAPE	1267	
		FRAUENLOB (TYPE 394)	1268	
		HAM	1269	
		HERSTAL	1270	
		KIISKI	1271	
		KUHA	1272	
		M-111	1273	
		M-15	1274	
		M-31	1275	
		M-43/47	1276	
		PIPA-A	1277	
		WOCHANG	1278	
		YEVGENYA	1279	
		YUKTO	1280	
		UNDEFINED	1281	THROUGH 1302
		MSR GENERAL	1303	
		UNDEFINED	1304	THROUGH 1313
		MSB GENERAL	1314	
		K-8	1315	
		N-300	1316	
		NESTIN	1317	
		N0. 7	1318	
		OLYA	1319	
		PO-2	1320	
		TR-40	1321	
		VD-141	1322	
		VULCAIN	1323	
		STYX	1324	
		PLUTON	1325	
		ACHERON	1326	
		UNDEFINED	1327	THROUGH 1334
		MSA GENERAL	1335	
		UNDEFINED	1336	THROUGH 1345
		MSD GENERAL	1346	
		HFG-1 (TROIKA)	1347	
		ILYUSHA	1348	
		UNDEFINED	1349	THROUGH 1358
		MCSD GENERAL	1359	
		UNDEFINED	1360	THROUGH 1369
		MSS GENERAL	1370	

5.3-548

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		ANDRYUSHA	1371	
		BALTIKA	1372	
		POLNOCNY	1373	
		UNDEFINED	1374 THROUGH 1383	
		MSH GENERAL	1384	
		UNDEFINED	1385 THROUGH 1394	
		MSO GENERAL	1395	
		BERLAIMONT (MODIFIED)	1396	
		UNDEFINED	1397 THROUGH 1405	
		MSHC GENERAL	1406	
		HUNT	1407	
		TRIPARTITE	1408	
		WILTON	1409	
		UNDEFINED	1410 THROUGH 1419	
		PP GENERAL	1420	
		AB 25	1421	
		UNDEFINED	1422	
		BALDER	1423	
		CASTLE	1424	
		ISLAND	1425	
		KRONSHADT	1426	
		PC-1638	1427	
		UNDEFINED	1428 THROUGH 1438	
		PG GENERAL	1439	
		BESKYTTEVREN	1440	
		BIHORO	1441	
		ERIMO	1442	
		DISUSED	1443	
		HVIDBJOERNEN	1444	
		IZU	1445	
		KOJIMA	1446	
		UNDEFINED	1447	
		NOJIMA	1448	
		PAUK	1449	
		PEACOCK	1450	
		POTI	1451	
		SAVAGE	1452	
		SHIRETOKO	1453	
		SOYA	1454	
		TACOMA	1455	
		LEOPARD (TYPE 148)	1456	
		BAMBU	1457	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		CASSIOPEA	1458	
		UNDEFINED	1459 THROUGH 1480	
		PGS GENERAL	1481	
		UNDEFINED	1482 THROUGH 1491	
		PGB GENERAL	1492	
		UNDEFINED	1493 THROUGH 1502	
		PGF GENERAL	1503	
		ALBATROS (TYPE 143)	1504	
		ASHEVILLE	1505	
		BARNEGAT	1506	
		CHONGJU	1507	
		GEPARD (TYPE 143A)	1508	
		HOUKU	1509	
		IVANSUSANIN	1510	
		KAMAN	1511	
		KARTAL	1512	
		KOMAR	1513	
		LA COMBATTANTE II	1514	
		LA COMBATTANTE III	1515	
		LURSSSEN FPB 57 TYPE	1516	
		OKHTENSKIY	1517	
		OSA I	1518	
		OSA II	1519	
		P-4	1520	
		PURGA	1521	
		SAAR 2	1522	
		SAAR 3	1523	
		SAAR 4	1524	
		SAAR 5	1525	
		SARIWON	1526	
		SNOEGG	1527	
		SOHUNG	1528	
		SOJU	1529	
		SORUM	1530	
		STORM	1531	
		T	1532	
		T-43	1533	
		T-58	1534	
		VOSPER 100-FT	1535	
		VOSPER BRAVE	1536	
		WILLEMOES	1537	
		UNDEFINED	1538 THROUGH 1583	

FIELD CODING FOR J14.2C5

(SHEET 46)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		PC GENERAL	1584	
		ADMIRABLE	1585	
		AGDLEK	1586	
		AKIZUKI	1587	
		ATTACK	1588	
		BAY	1589	
		DISUSED	1590	
		BROOKE MARINE 108-FT	1591	
		CACINE	1592	
		CHONGJU	1593	
		DAPHNE	1594	
		GDANSK	1595	
		HAIKOU	1596	
		HAINAN	1597	
		HANOE	1598	
		K-48	1599	
		KRALJEVICA	1600	
		KRONSHADT	1601	
		LAKE	1602	
		MAGAEN	1603	
		MATSUNAMI	1604	
		MIZUTORI	1605	
		MURAKUMO	1606	
		OBLUZE	1607	
		PGM 71	1608	
		SDB MK II	1609	
		SDB MK III	1610	
		SEAFORTH	1611	
		SHANGHAI	1612	
		SHANGHAI II	1613	
		SHANGHAI II (MODIFIED)	1614	
		SHIKINAMI	1615	
		SO-1	1616	
		SOMAN	1617	
		STENKA	1618	
		T-58	1619	
		TAECHONG	1620	
		UK FORD	1621	
		UMIGIRI	1622	
		US 110-FT	1623	
		US 173-FT	1624	
		UNDEFINED	1625	

5.3-551

MIL-STD-6016B

FIELD CODING FOR J14.2C5

(SHEET 47)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		ARCHER	1626	
		ATTACKER	1627	
		23M PC (MANLY)	1628	
		UNDEFINED	1629 THROUGH 1681	
		PCF GENERAL	1682	
		BABOCHKA	1683	
		MURAVEY	1684	
		POTI	1685	
		SO-1 (MODIFIED)	1686	
		UNDEFINED	1687 THROUGH 1696	
		PCE GENERAL	1697	
		UNDEFINED	1698 THROUGH 1707	
		PB GENERAL	1708	
		AKAGI	1709	
		AKIZUKI	1710	
		ALBATROZ	1711	
		ATTACK P-90	1712	
		BARSO	1713	
		BAY	1714	
		BIZAN	1715	
		BROOKE MARINE 37.5M	1716	
		CHONGJIN	1717	
		DABUR	1718	
		DALARO	1719	
		DE L'ESTEREL	1720	
		DILOS	1721	
		DOM ALEIXO	1722	
		DISUSED	1723	
		FREMANTLE	1724	
		GOULANDRIS	1725	
		GUANABACOA	1726	
		HAMAGIRI	1727	
		HAMELIN 37M	1728	
		HIDAKA	1729	
		HUANGPU	1730	
		INTERCEPTOR MK II	1731	
		KIMJIN 67-FT	1732	
		MATSUNAMI	1733	
		MURAKUMO	1734	
		OIRASE	1735	
		P 400	1736	
		P-6	1737	

5.3-552

MIL-STD-6016B

FIELD CODING FOR J14.2C5

(SHEET 48)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		PANAGOPOULOS	1738	
		PATRA	1739	
		PBR MK II	1740	
		PBR MK III	1741	
		PGM 71	1742	
		PO-2	1743	
		POLISH K-8	1744	
		POLUCHAT I	1745	
		SHANTOU	1746	
		SHIKINAMI	1747	
		SINHUNG 72-FT	1748	
		SKANOER	1749	
		SOYA/TSUGARU	1750	
		SPEAR	1751	
		STEWART 85-FT	1752	
		SWATOW	1753	
		SWIFT	1754	
		TAISHAN	1755	
		TESHIO	1756	
		TRACKER II	1757	
		US 110-FT	1758	
		US ARMY 2001 65-FT	1759	
		USCG 83-FT	1760	
		VEDETTE 28 92-FT	1761	
		VIKRAM	1762	
		VOSPER 70-FT	1763	
		YAMAYURI	1764	
		ZHUK	1765	
		SNOEGG	1766	
		MARS	1767	
		TRIDENT	1768	
		UNDEFINED	1769 THROUGH 1842	
		PBF GENERAL	1843	
		CHAO (CHODO)	1844	
		DE L'ESTEREL	1845	
		GIRNE	1846	
		HAUK	1847	
		HUGIN	1848	
		SLEPEN	1849	
		UNDEFINED	1850	
		SPICA II	1851	
		MARS	1852	

5.3-553

MIL-STD-6016B

FIELD CODING FOR J14.2C5

(SHEET 49)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		UNDEFINED	1853 THROUGH 1863	
		PBS GENERAL	1864	
		UNDEFINED	1865 THROUGH 1874	
		PBR GENERAL	1875	
		LEIE	1876	
		PIYAVKA	1877	
		SHMEL	1878	
		VOSH	1879	
		YATUSH	1880	
		YAZ	1881	
		UNDEFINED	1882 THROUGH 1891	
		PT GENERAL	1892	
		AN JU	1893	
		EPITROP	1894	
		HIGGINS 78-FT	1895	
		HUCHUAN PTH-	1896	
		HUZHOU	1897	
		IWON	1898	
		DISUSED	1899	
		KU SONG	1900	
		NO. 11	1901	
		P-4	1902	
		P-6	1903	
		PILICA	1904	
		SHERSHEN	1905	
		SIN HUNG	1906	
		SIN NAM	1907	
		SINPO	1908	
		SOLOVEN	1909	
		SPICA	1910	
		TJELD	1911	
		WISLA	1912	
		DISUSED	1913	
		SHANGDONG	1914	
		TURYA	1915	
		UNDEFINED	1916 THROUGH 2047	
		PHM GENERAL	2048	
		MATKA	2049	
		PEGASUS	2050	
		SARANCHA	2051	
		SHIMRIT	2052	
		SPARVIERO	2053	

5.3-554

MIL-STD-6016B

FIELD CODING FOR J14.2C5

(SHEET 50)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		UNDEFINED	2054 THROUGH 2063	
		BM GENERAL	2064	
		UNDEFINED	2065 THROUGH 2074	
		BMR GENERAL	2075	
		UNDEFINED	2076 THROUGH 2085	
		SWCL GENERAL	2086	
		UNDEFINED	2087 THROUGH 2096	
		AA GENERAL	2097	
		UNDEFINED	2098 THROUGH 2107	
		AG GENERAL	2108	
		ADOLF	2109	
		AKIZUKI	2110	
		ANGARA	2111	
		ARGO	2112	
		AYANAMI	2113	
		DISUSED	2114 THROUGH 2115	
		CHAMOIS	2116	
		CHIHAYA	2117	
		DALDYN	2118	
		DISUSED	2119	
		DINGHAI	2120	
		ENDURANCE	2121	
		EXPLORER	2122	
		DISUSED	2123	
		FRIPONNE	2124	
		GALEB	2125	
		UNDEFINED	2126	
		HAM	2127	
		DISUSED	2128	
		HAYABUSA	2129	
		DISUSED	2130	
		ISLES	2131	
		KEYLA	2132	
		KURIHAMA	2133	
		L' ARCHEONAUTE	2134	
		L' ATHOS	2135	
		UNDEFINED	2136	
		LENTA	2137	
		LIANYUN	2138	
		LSIL	2139	
		MIZUTORI	2140	
		MP-2	2141	

5.3-555

MIL-STD-6016B

FIELD CODING FOR J14.2C5

(SHEET 51)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		MP-8	2142	
		MURASAME	2143	
		NEFTEGAZ	2144	
		NØ. 81	2145	
		NORGE	2146	
		OHRE	2147	
		ONEGA	2148	
		DISUSED	2149	
		POSEIDON	2150	
		PS-10	2151	
		RARI	2152	
		RHIN	2153	
		SABAC	2154	
		SHAHSAVAR	2155	
		ST. LYKODIS	2156	
		STALWART	2157	
		T-43	2158	
		TAPATAI	2159	
		TAPPE	2160	
		THULE	2161	
		TOMBA	2162	
		TSUGARU	2163	
		UMITAKA	2164	
		US 184 FT. PCE	2165	
		US 72 FT. HMDL	2166	
		VANGUARD	2167	
		VIS	2168	
		VYTEGRALES	2169	
		WHISKEY	2170	
		WILHELM PULLWER (TYPE 741)	2171	
		PELIKAAN	2172	
		RANCE	2173	
		MERCURE	2174	
		STERNE	2175	
		ALBATROS	2176	
		PHENIX	2177	
		UNDEFINED	2178 THROUGH 2256	
		ARV GENERAL	2257	
		ARGUS	2258	
		ENGADINE	2259	
		RELIANT	2260	

5.3-556

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		UNDEFINED	2261 THROUGH 2270	
		AVT GENERAL	2271	
		LEXINGTON	2272	
		UNDEFINED	2273 THROUGH 2282	
		AE GENERAL	2283	
		EVROS	2284	
		DISUSED	2285	
		KILAUEA	2286	
		NITRO	2287	
		REGENT	2288	
		SURIBACHI	2289	
		WESTERWALD (TYPE 760)	2290	
		UNDEFINED	2291 THROUGH 2301	
		AEL GENERAL	2302	
		UNDEFINED	2303 THROUGH 2312	
		AET GENERAL	2313	
		UNDEFINED	2314 THROUGH 2323	
		AETL GENERAL	2324	
		UNDEFINED	2325 THROUGH 2334	
		AGF GENERAL	2335	
		ABDIEL	2336	
		CORONADO	2337	
		GODETIA	2338	
		LA SALLE	2339	
		DISUSED	2340	
		ZINNIA	2341	
		ELBE (TYPE 404)	2342	
		UNDEFINED	2343 THROUGH 2351	
		ACM GENERAL	2352	
		UNDEFINED	2353 THROUGH 2362	
		APB GENERAL	2363	
		MICHELANGELO	2364	
		UNDEFINED	2365 THROUGH 2374	
		ABU GENERAL	2375	
		CARDENAS	2376	
		FINIK I	2377	
		KARPF II	2378	
		SKB 64	2379	
		YANTAI	2380	
		YANNAN	2381	
		YANGUAN	2382	
		TIANEE	2383	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		LA PRUDENTE	2384	
		UNDEFINED	2385 THROUGH 2395	
		ABUD GENERAL	2396	
		UNDEFINED	2397 THROUGH 2406	
		ANL GENERAL	2407	
		UNDEFINED	2408 THROUGH 2417	
		ARC GENERAL	2418	
		EMBA I	2419	
		EMBA II	2420	
		KALAR	2421	
		KLASMA	2422	
		MP-2	2423	
		NEPTUNE	2424	
		TELNOVSK (MODIFIED)	2425	
		YOUDIAN	2426	
		ZEUS	2427	
		UNDEFINED	2428 THROUGH 2440	
		AK GENERAL	2441	
		2ND LT JOHN P BOBO	2442	
		ALCHIBA	2443	
		AMGUEMA	2444	
		ANDIZHAN	2445	
		ANDONG	2446	
		ANDROMEDA (CONVERTED)	2447	
		DISUSED	2448	
		BARRICADE	2449	
		BITTERBUSH	2450	
		C3-S-33A TYPE	2451	
		(CONVERTED)		
		C4-S-66A TYPE	2452	
		C4-S-69B TYPE	2453	
		C4-S-A3 TYPE	2454	
		C5-S-75A TYPE	2455	
		CHULYM	2456	
		CPL LOUIS J HAUGE JR	2457	
		DINGHAI	2458	
		DONBA SS	2459	
		FS DESIGN 330	2460	
		GALATI	2461	
		HONGQI	2462	
		ISLES	2463	
		KANARYA	2464	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		KOLOMNA	2465	
		LENINGRADSKY KOMSOMOLETS	2466	
		LSIL	2467	
		NEON ANTONOV	2468	
		NORWALK	2469	
		PT-61	2470	
		SGT MATEJ KOCAK	2471	
		THROSK	2472	
		TREE	2473	
		YANHANG	2474	
		YUNYY PARTIZAN	2475	
		UNDEFINED	2476 THROUGH 2521	
		AKL GENERAL	2522	
		ELTANIN	2523	
		KEYLA	2524	
		UNDEFINED	2525	
		LENTRA	2526	
		UNDEFINED	2527	
		MP 4	2528	
		MP 6	2529	
		MUNA	2530	
		SEKSTAN	2531	
		TELNOVSK	2532	
		WISTING	2533	
		GORGONA	2534	
		UNDEFINED	2535 THROUGH 2549	
		AKR GENERAL	2550	
		ALGOL (SL 7)	2551	
		CALLAGHAN	2552	
		COMET	2553	
		METEOR	2554	
		DISUSED	2555	
		MAINE (CONVERTED)	2556	
		UNDEFINED	2557 THROUGH 2566	
		AFS GENERAL	2567	
		FORT	2568	
		UNDEFINED	2569	
		MARS	2570	
		RESOURCE	2571	
		UNDEFINED	2572 THROUGH 2580	
		AOE GENERAL	2581	
		SACRAMENTO	2582	

FIELD CODING FOR J14.2C5

(SHEET 55)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		SAGAMI	2583	
		UNDEFINED	2584 THROUGH 2593	
		AD GENERAL	2594	
		YELLOWSTONE	2595	
		SAMUEL GOMPERS	2596	
		DIXIE	2597	
		STALWART	2598	
		UNDEFINED	2599 THROUGH 2608	
		AWW GENERAL	2609	
		UNDEFINED	2610 THROUGH 2619	
		AH GENERAL	2620	
		HAVEN	2621	
		OB	2622	
		DISUSED	2623	
		UNDEFINED	2624 THROUGH 2632	
		AGB GENERAL	2633	
		DOBRYNYA NIKITICH	2634	
		HANSE	2635	
		IVANSUSANIN	2636	
		SHIRASE	2637	
		YANHA	2638	
		UNDEFINED	2639 THROUGH 2648	
		AGBL GENERAL	2649	
		EISVOGEL (TYPE 721)	2650	
		DISUSED	2651	
		UNDEFINED	2652 THROUGH 2661	
		AGI GENERAL	2662	
		ALPINIST	2663	
		ARMINZA	2664	
		UNDEFINED	2665	
		BALZAM	2666	
		BOLOGOE	2667	
		DISUSED	2668	
		HAM	2669	
		DISUSED	2670	
		DISUSED	2671	
		LENTRA	2672	
		MAYAK	2673	
		MIRNY	2674	
		MOMA	2675	
		NIKOLAY ZUBOV	2676	
		OKEAN	2677	

5.3-560

MIL-STD-6016B

FIELD CODING FOR J14.2C5

(SHEET 56)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		DISUSED	2678	
		PAMIR	2679	
		PRIMORYE	2680	
		ALSTER (TYPE 423)	2681	
		UNDEFINED	2682	THROUGH 2705
		ALS GENERAL	2706	
		UNDEFINED	2707	THROUGH 2716
		AEM GENERAL	2717	
		AMGA	2718	
		ANDIZHAN (MODIFIED)	2719	
		LAMA	2720	
		MALINA	2721	
		MELITOPOL	2722	
		MP 6	2723	
		UNDEFINED	2724	THROUGH 2733
		AGM GENERAL	2734	
		AGM-24	2735	
		GEN HOYT S VANDENBERG	2736	
		OBSERVATION ISLAND	2737	
		RANGE SENTINEL	2738	
		(HASKELL TYPE)		
		REDSTONE	2739	
		UNDEFINED	2740	THROUGH 2749
		AGOR GENERAL	2750	
		ABKHAZIYA	2751	
		AKADEMIK KRYLOV	2752	
		ARAD	2753	
		BALIKPAPAN	2754	
		BELGICA	2755	
		DISUSED	2756	
		COOK	2757	
		D'ENTRECASTEAUX	2758	
		DOBRYNYA NIKITICH	2759	
		DONG MING	2760	
		ELTANIN	2761	
		ENDEAVOR	2762	
		FRANCESCO NULLO	2763	
		DISUSED	2764	
		GRIGORE ANTIPA	2765	
		GYRE	2766	
		HAYES	2767	
		HECLA	2768	

5.3-561

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		MELVILLE	2769	
		MSC 60	2770	
		NAUTILUS	2771	
		NEVELSKOY	2772	
		NIKOLAY ZUBOV	2773	
		PITHEAS	2774	
		POLYUS	2775	
		QUEST	2776	
		ROBERT D CONRAD	2777	
		T-43	2778	
		TRITON	2779	
		TUI	2780	
		TYDEMAN	2781	
		XIANG YANG HONG	2782	
		YANLUN	2783	
		YUG	2784	
		ZENOBE GRAMME	2785	
		MAYAK	2786	
		UNDEFINED	2787 THROUGH 2823	
		AGOB GENERAL	2824	
		POLARSTERN	2825	
		UNDEFINED	2826 THROUGH 2835	
		AGOS GENERAL	2836	
		UNDEFINED	2837 THROUGH 2845	
		AO GENERAL	2846	
		UNDEFINED	2847	
		AKAR	2848	
		ALBAY BURBAK	2849	
		ALTAY	2850	
		UNDEFINED	2851	
		BASKUNCHAK	2852	
		BAYLEAF	2853	
		BINBASI GURGAN	2854	
		DISUSED	2855	
		CIMARRON	2856	
		CIMARRON (JUMBOISED)	2857	
		DORA	2858	
		HAMANA	2859	
		DISUSED	2860	
		DISUSED	2861	
		HENRY J KAISER	2862	
		IRTYSH	2863	

FIELD CODING FOR J14.2C5

(SHEET 58)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		KALININGRADNEFT	2864	
		KHOBI	2865	
		KONDA	2866	
		METTAWEE	2867	
		MISPILLION (JUMBOISED)	2868	
		MOSKIT	2869	
		NEOSHO	2870	
		NERCHA	2871	
		NORWEGIAN BOW	2872	
		OLEKMA	2873	
		PATAPSCO	2874	
		PEVEK	2875	
		UNDEFINED	2876	
		SOFIYA	2877	
		SPESSART (TYPE 704A)	2878	
		TASKIZAK	2879	
		USEDOM	2880	
		WALCHENSEE (TYPE 703)	2881	
		WAVE	2882	
		DISUSED	2883	
		YUZBASI TOLUNAY	2884	
		BRAMBLELEAF	2885	
		UNDEFINED	2886 THROUGH 2936	
		AOT GENERAL	2937	
		AMERICAN EXPLORER	2938	
		AOTL	2939	
		EBANOL	2940	
		FULIN	2941	
		FUZHOU	2942	
		GUANZGHOU	2943	
		LEIZHOU	2944	
		MAUMEE	2945	
		METTAWEE	2946	
		MISSION	2947	
		POTOMOC	2948	
		SEALIFT	2949	
		SUAMICO	2950	
		T 5 TYPE	2951	
		TM2	2952	
		PORT VENDRES	2953	
		UNDEFINED	2954 THROUGH 2973	
		AOTL GENERAL	2974	

FIELD CODING FOR J14.2C5

(SHEET 59)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		DISUSED	2975	
		KHOBI	2976	
		UNDEFINED	2977 THROUGH 2986	
		AOR GENERAL	2987	
		BANDAR ABBAS	2988	
		BEREZINA	2989	
		BORIS CHILIKIN	2990	
		CAPITAN OLA PANTOJA	2991	
		DEEPAK	2992	
		DUBNA	2993	
		DURANCE	2994	
		FUQING	2995	
		KAZBEK	2996	
		KHARG	2997	
		MEERSBURG (TYPE 701C)	2998	
		MESAR	2999	
		OLWEN	3000	
		POOLSTER	3001	
		POLYARNIK	3002	
		PROTECTEUR	3003	
		PROVIDER	3004	
		ROVER	3005	
		SAO GABRIEL	3006	
		STROMBOLI	3007	
		TIDE (IMPROVED)	3008	
		UDA	3009	
		WICHITA	3010	
		FORT VICTORIA	3011	
		BERLIN (TYPE 702C)	3012	
		UNDEFINED	3013 THROUGH 3042	
		AORL GENERAL	3043	
		LEIZHOU	3044	
		UNDEFINED	3045 THROUGH 3054	
		AOL GENERAL	3055	
		PUNARUU	3056	
		UNDEFINED	3057 THROUGH 3065	
		AGP GENERAL	3066	
		GRAHAM COUNTY	3067	
		NORGE	3068	
		DISUSED	3069	
		MERCUUR	3070	
		UNDEFINED	3071 THROUGH 3079	

5.3-564

MIL-STD-6016B

FIELD CODING FOR J14.2C5

(SHEET 60)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		AP GENERAL	3080	
		MIKHAIL KALININ	3081	
		PANDORA	3082	
		QIONGSHA	3083	
		UNDEFINED	3084 THROUGH 3093	
		AGR GENERAL	3094	
		UNDEFINED	3095 THROUGH 3104	
		AOSR GENERAL	3105	
		UNDEFINED	3106 THROUGH 3115	
		AR GENERAL	3116	
		ACHELOUS	3117	
		AJAX	3118	
		AMPHION	3119	
		AMUR	3120	
		ARL I	3121	
		DALIANG	3122	
		DILIGENCE	3123	
		DIXIE	3124	
		JULES VERNE	3125	
		OSKOL	3126	
		RHIN	3127	
		STALWART	3128	
		UNDEFINED	3129 THROUGH 3145	
		ARL GENERAL	3146	
		ARCHELOUS	3147	
		UNDEFINED	3148 THROUGH 3157	
		AGE GENERAL	3158	
		BELGICA	3159	
		BERRY	3160	
		UNDEFINED	3161	
		COMMANDANT RIVIERE	3162	
		DESNA	3163	
		DOBRYNYA NIKITICH	3164	
		EF 3	3165	
		HENRI POINCARE	3166	
		ILE D'OLERON	3167	
		IVANSUSANIN	3168	
		KOLOMNA	3169	
		LENTRA	3170	
		MARSHAL NEDELIN	3171	
		MOMA	3172	
		MP-8	3173	

FIELD CODING FOR J14.2C5

(SHEET 61)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		MUNA	3174	
		NARVIK	3175	
		OS-3	3176	
		POINT LOMA	3177	
		POTOK	3178	
		QUARTO	3179	
		SASHA	3180	
		SIBIR	3181	
		SO-1	3182	
		T-43	3183	
		TRITON	3184	
		DISUSED	3185	
		YAL 01	3186	
		YANXI	3187	
		ROSSETTI	3188	
		DENTI	3189	
		MONGE	3190	
		UNDEFINED	3191 THROUGH 3227	
		ARS GENERAL	3228	
		BOLSTER	3229	
		DISUSED	3230	
		INGUL	3231	
		KATUN I	3232	
		KATUN II	3233	
		KOWAN	3234	
		LSIL 351	3235	
		MIKHAIL RUDNITSKY	3236	
		OREL	3237	
		PAMIR	3238	
		PIAST	3239	
		PROTEO	3240	
		PS-11	3241	
		SAFEGUARD	3242	
		SILVA	3243	
		SPASILAC	3244	
		DISUSED	3245	
		US 149 FT	3246	
		YANDING	3247	
		UNDEFINED	3248 THROUGH 3273	
		ARSD GENERAL	3274	
		UNDEFINED	3275 THROUGH 3284	
		ASVR GENERAL	3285	

5.3-566

MIL-STD-6016B

FIELD CODING FOR J14.2C5

(SHEET 62)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		UNDEFINED	3286 THROUGH 3295	
		AOS GENERAL	3296	
		ALATNA	3297	
		LUZA	3298	
		URAL	3299	
		VALA	3300	
		TONTI	3301	
		UNDEFINED	3302 THROUGH 3311	
		AF GENERAL	3312	
		CROITOR	3313	
		DANLIN	3314	
		MAYAK	3315	
		RIEGEL	3316	
		UNDEFINED	3317 THROUGH 3326	
		AKS GENERAL	3327	
		UNDEFINED	3328 THROUGH 3337	
		AKSL GENERAL	3338	
		UNDEFINED	3339 THROUGH 3348	
		AFL GENERAL	3349	
		UNDEFINED	3350 THROUGH 3359	
		ASR GENERAL	3360	
		ANTEO	3361	
		CHANTICLEER	3362	
		DAHIANG	3363	
		DALANG	3364	
		ELBRUS	3365	
		FEHMARN (TYPE 720B)	3366	
		FUSHIMI	3367	
		GALATI	3368	
		HUDONG	3369	
		KURTARAN	3370	
		NEPA	3371	
		PIGEON	3372	
		PRUT	3373	
		ROSLAVL	3374	
		SPASILAC	3375	
		VALDAY	3376	
		ZHONGHUA	3377	
		UNDEFINED	3378 THROUGH 3401	
		AS GENERAL	3402	
		ACHELOUS	3403	
		AEGIR	3404	

FIELD CODING FOR J14.2C5

(SHEET 63)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		DISUSED	3405	
		ATREK	3406	
		CHIYODA	3407	
		DADONG	3408	
		DAZHOU	3409	
		DIVER	3410	
		DNEPR	3411	
		DNEPR (MODIFIED)	3412	
		DON	3413	
		EMORY S LAND	3414	
		FULTON	3415	
		HUNLEY	3416	
		L Y SPEAR	3417	
		PROTEUS	3418	
		DISUSED	3419	
		SIMON LAKE	3420	
		UGRA	3421	
		UNDEFINED	3422 THROUGH 3447	
		ASL GENERAL	3448	
		UNDEFINED	3449 THROUGH 3458	
		AGS GENERAL	3459	
		AGS 39 CLASS	3460	
		AKASHI	3461	
		ALMEIDA CARVALHO	3462	
		AMMIRAGLIO MAGNAGHI	3463	
		ANDRIJA MOHOROVICIC	3464	
		AUK	3465	
		BIYA	3466	
		BOLOGUE	3467	
		UNDEFINED	3468	
		BUYSKES	3469	
		C4-S-A1 TYPE (CONVERTED)	3470	
		CHAUVENET	3471	
		COOK	3472	
		DING HAI	3473	
		FINIK	3474	
		FS DESIGN 330	3475	
		FUTAMI	3476	
		HAMASHIO	3477	
		HEIYO	3478	
		KAIBOKAN I	3479	
		KAIYO	3480	

5.3-568

MIL-STD-6016B

FIELD CODING FOR J14.2C5

(SHEET 64)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		KAMENKA	3481	
		DISUSED	3482	
		UNDEFINED	3483	
		L'ESPERANCE	3484	
		UNDEFINED	3485	
		LENTRA	3486	
		LSIL	3487	
		MEIYO	3488	
		MELITOPOL	3489	
		MOMA	3490	
		MONOWAI	3491	
		MORESBY	3492	
		MP-8	3493	
		MSC-294 (BLUEBIRD)	3494	
		NYRYAT I	3495	
		NYRYAT II	3496	
		SAMARA	3497	
		SHOYO	3498	
		SILAS BENT	3499	
		STERNE	3500	
		SUMA	3501	
		T-43	3502	
		TAKUYO	3503	
		TELNOVSK	3504	
		TELNOVSK (MODIFIED)	3505	
		TENYO	3506	
		VICTORY (CONVERTED)	3507	
		WILKES	3508	
		YANLAI	3509	
		YANXU	3510	
		MIRTO	3511	
		MARS	3512	
		LAPEROUSE	3513	
		UNDEFINED	3514 THROUGH 3579	
		AGSA GENERAL	3580	
		UNDEFINED	3581 THROUGH 3590	
		AGSC GENERAL	3591	
		EXPLORER	3592	
		FLINDERS	3593	
		TAINO	3594	
		BULLDOG	3595	
		ROEBUCK	3596	

5.3-569

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		UNDEFINED	3597 THROUGH 3604	
		AX GENERAL	3605	
		ARIS	3606	
		DISUSED	3607	
		JADRAN	3608	
		JERVIS BAY	3609	
		JOSE MARTI	3610	
		MP-8	3611	
		SMOLNY	3612	
		UGRA	3613	
		VIETNAM HEROICO	3614	
		WODNIK	3615	
		UNDEFINED	3616 THROUGH 3630	
		AXL GENERAL	3631	
		UNDEFINED	3632	
		LEOPARD	3633	
		MAYAK	3634	
		UNDEFINED	3635 THROUGH 3642	
		AXS GENERAL	3643	
		AMERIGO VESPUCCI	3644	
		CAROLY	3645	
		CARSARO II	3646	
		GORCH FOCK (TYPE 441A)	3647	
		MIRCEA	3648	
		PALINURO	3649	
		SAGRES	3650	
		STELLA POLARE	3651	
		UNDEFINED	3652 THROUGH 3659	
		AT GENERAL	3660	
		UNDEFINED	3661 THROUGH 3665	
		ATA GENERAL	3666	
		ABNAKI	3667	
		APACHE	3668	
		ARMY 254	3669	
		ATAK	3670	
		ATLANTE	3671	
		AZUMA	3672	
		BELIER	3673	
		UNDEFINED	3674	
		GAJ	3675	
		GNIEWKO	3676	
		GORYN	3677	

FIELD CODING FOR J14.2C5

(SHEET 66)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		GROMOVOY	3678	
		KUDRET	3679	
		MAITO	3680	
		MB-31	3681	
		MB-65	3682	
		MOTYL	3683	
		OKHTENSKIY	3684	
		ONCU	3685	
		POWHATAN	3686	
		ROSLAVL	3687	
		ROYSTERER	3688	
		SAINT	3689	
		SCHULTZ XAVIER	3690	
		SORUM	3691	
		TENACE	3692	
		TUZHONG	3693	
		TYPHOON	3694	
		WANGEROOGE (TYPE 722B)	3695	
		ZENIT	3696	
		MAITO	3697	
		ARMEN	3698	
		UNDEFINED	3699 THROUGH 3737	
		ATR GENERAL	3738	
		TENACE	3739	
		UNDEFINED	3740 THROUGH 3748	
		ATS GENERAL	3749	
		EDENTON	3750	
		OKHTENSKY	3751	
		LANGE00G (TYPE 754)	3752	
		ARGUS	3753	
		UNDEFINED	3754 THROUGH 3762	
		AWT GENERAL	3763	
		UNDEFINED	3764	
		BASENTO	3765	
		FUZHOU (MODIFIED)	3766	
		KANGAN	3767	
		LEIZHOU (MODIFIED)	3768	
		LSIL	3769	
		MANYCH	3770	
		MINCIO	3771	
		PIAVE	3772	
		TEVERE	3773	

FIELD CODING FOR J14.2C5

(SHEET 67)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		ULUBAT	3774	
		VODA	3775	
		YW-83	3776	
		Z	3777	
		UNDEFINED	3778 THROUGH 3797	
		SERVICE CRAFT GENERAL	3798	
		BARGE, GENERAL	3799	
		YO GENERAL	3800	
		YOG GENERAL	3801	
		YHT GENERAL	3802	
		YRNS GENERAL	3803	
		YOS GENERAL	3804	
		YPK GENERAL	3805	
		YRR GENERAL	3806	
		YRB GENERAL	3807	
		YRST GENERAL	3808	
		YOM GENERAL	3809	
		YOSS GENERAL	3810	
		YW GENERAL	3811	
		UNDEFINED	3812 THROUGH 3827	
		YD GENERAL	3828	
		YM GENERAL	3829	
		YFD GENERAL	3830	
		YFP GENERAL	3831	
		YGT GENERAL	3832	
		YR GENERAL	3833	
		UNDEFINED	3834 THROUGH 3840	
		YFD GENERAL	3841	
		YFDB GENERAL	3842	
		YFDM GENERAL	3843	
		YFDL GENERAL	3844	
		UNDEFINED	3845 THROUGH 3850	
		YRD GENERAL	3851	
		YRDB GENERAL	3852	
		YRDM GENERAL	3853	
		YRDL GENERAL	3854	
		UNDEFINED	3855 THROUGH 3861	
		LIGHTER GENERAL	3862	
		YE GENERAL	3863	
		YF GENERAL	3864	
		YFC GENERAL	3865	
		YFR GENERAL	3866	

FIELD CODING FOR J14.2C5

(SHEET 68)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		YC GENERAL	3867	
		YFT GENERAL	3868	
		UNDEFINED	3869 THROUGH 3878	
		YT GENERAL	3879	
		YTB GENERAL	3880	
		YTM GENERAL	3881	
		YTL GENERAL	3882	
		UNDEFINED	3883 THROUGH 3892	
		YAGF GENERAL	3893	
		YAG GENERAL	3894	
		YV GENERAL	3895	
		YNG GENERAL	3896	
		YP GENERAL	3897	
		YFU GENERAL	3898	
		YAM GENERAL	3899	
		YNC GENERAL	3900	
		YLC GENERAL	3901	
		YVS GENERAL	3902	
		YRG GENERAL	3903	
		YAGT GENERAL	3904	
		YPT GENERAL	3905	
		YRC GENERAL	3906	
		YDT GENERAL	3907	
		YNT GENERAL	3908	
		YH GENERAL	3909	
		YFB GENERAL	3910	
		YTR GENERAL	3911	
		YFL GENERAL	3912	
		YAC GENERAL	3913	
		YSR GENERAL	3914	
		YSG GENERAL	3915	
		YDG GENERAL	3916	
		KHABAROV	3917	
		UNDEFINED	3918 THROUGH 3936	
		TM GENERAL	3937	
		TMD GENERAL	3938	
		TMB GENERAL	3939	
		TMK GENERAL	3940	
		TMF GENERAL	3941	
		TMC GENERAL	3942	
		TMCS GENERAL	3943	
		TMWW GENERAL	3944	

FIELD CODING FOR J14.2C5

(SHEET 69)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		TMA GENERAL	3945	
		TMH GENERAL	3946	
		TMGB GENERAL	3947	
		TMI GENERAL	3948	
		TML GENERAL	3949	
		TMOT GENERAL	3950	
		TMM GENERAL	3951	
		TMP GENERAL	3952	
		TMFR GENERAL	3953	
		TMR GENERAL	3954	
		TMOR GENERAL	3955	
		TMOL GENERAL	3956	
		TME GENERAL	3957	
		TMGS GENERAL	3958	
		TMLS GENERAL	3959	
		TMS GENERAL	3960	
		TMOS GENERAL	3961	
		TMO GENERAL	3962	
		TMX GENERAL	3963	
		TMWT GENERAL	3964	
		UNDEFINED	3965 THROUGH 3989	
		TMT GENERAL	3990	
		TMTR GENERAL	3991	
		TMTS GENERAL	3992	
		UNDEFINED	3993 THROUGH 4002	
		TU GENERAL	4003	
		TUF GENERAL	4004	
		TUB GENERAL	4005	
		TUI GENERAL	4006	
		TUR GENERAL	4007	
		TUT GENERAL	4008	
		TUS GENERAL	4009	
		TUC GENERAL	4010	
		TUW GENERAL	4011	
		UNDEFINED	4012 THROUGH 4023	
		TJ GENERAL	4024	
		TJF GENERAL	4025	
		TJC GENERAL	4026	
		TJCS GENERAL	4027	
		TJGB GENERAL	4028	
		UNDEFINED	4029 THROUGH 4038	
		TS GENERAL	4039	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		TSG GENERAL	4040	
		TSR GENERAL	4041	
		UNDEFINED	4042 THROUGH 4052	
		MPS GENERAL	4053	
		UNDEFINED	4054 THROUGH 4069	
		SURFACE SPECIFIC TYPE	4070 THROUGH 4094	
		1-25		
		RESET TO NO STATEMENT	4095	

809	001	SUBSURFACE (MARITIME) SPECIFIC TYPE		THE SPECIFIC TYPE OF POINT OR TRACK WITH AN ENVIRONMENT/CATEGORY OF SUBSURFACE (MARITIME).

NO STATEMENT	0
SS GENERAL	1
ABTAO SS	2
DISUSED	3
DISUSED	4
UNDEFINED	5
DISUSED	6
GUPPY II SS	7
GUPPY IIA SS	8
GUPPY III SS	9
HAI LUNG SS	10
DISUSED	11
SAURO (TYPE 1081) SS	12
SAURO (IMPROVED) SS	13
TANG SS	14
TYPE SNA 72 SS	15
UZUSHIO SS	16
WALRUS SS	17
YUUSHIO SS	18
UNDEFINED	19
DISUSED	20
PELOSI SS	21
UNDEFINED	22 THROUGH 360
SSB GENERAL	361
GOLF SSB	362
GOLF II SSB	363
GOLF III SSB	364
GOLF V SSB	365
UNDEFINED	366 THROUGH 440
SSBN GENERAL	441

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
809	001	SUBSURFACE (MARITIME) SPECIFIC (CONTINUED)		
		TYPE		

		BENJAMIN FRANKLIN SSBN	442	
		DELTA I SSBN	443	
		DELTA II SSBN	444	
		DELTA III SSBN	445	
		DELTA IV SSBN	446	
		HOTEL III SSBN	447	
		DISUSED	448	
		L'INFLEXIBLE SSBN	449	
		DISUSED	450	
		UNDEFINED	451	
		OHIO SSBN	452	
		RESOLUTION SSBN	453	
		TYPHOON SSBN	454	
		VANGUARD SSBN	455	
		YANKEE SSBN	456	
		YANKEE I SSBN	457	
		YANKEE II SSBN	458	
		XIA SSBN	459	
		LE TERRIBLE SSBN	460	
		UNDEFINED	461 THROUGH 720	
		SSN GENERAL	721	
		AKULA SSN	722	
		ALFA SSN	723	
		AMATHEPT SSN	724	
		CHARLIE/VICTOR SSGN/SSN	725	
		CHURCHILL SSN	726	
		ECHO/NOVEMBER SSGN/SSN	727	
		DISUSED	728	
		DISUSED	729	
		HAN SSN	730	
		HOTEL SSN	731	
		LOS ANGELES SSN	732	
		MIKE SSN	733	
		NARWHAL SSN	734	
		DISUSED	735	
		RUBIS SSN	736	
		SEAWOLF SSN	737	
		SIERRA SSN	738	
		DISUSED	739	
		DISUSED	740	
		STURGEON SSN	741	
		SWIFTSURE SSN	742	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
809	001	SUBSURFACE (MARITIME) SPECIFIC (CONTINUED)		
		TYPE		

		TRAFALGAR SSN	743	
		DISUSED	744	
		VICTOR I SSN	745	
		VICTOR II SSN	746	
		VICTOR III SSN	747	
		YANKEE SSN	748	
		VIRGINIA SSN	749	
		UNDEFINED	750 THROUGH 1200	
		SSG GENERAL	1201	
		JULIETT SSG	1202	
		UNDEFINED	1203 THROUGH 1245	
		SSGN GENERAL	1246	
		CHARLIE I SSGN	1247	
		CHARLIE II SSGN	1248	
		ECHO II SSGN	1249	
		OSCAR SSGN	1250	
		PAPA SSGN	1251	
		UNDEFINED	1252 THROUGH 1345	
		SSK GENERAL	1346	
		AGOSTA SSK	1347	
		UNDEFINED	1348	
		FOXTROT SSK	1349	
		HEROJ SSK	1350	
		KILO SSK	1351	
		MING SSK	1352	
		NARVAL SSK	1353	
		DISUSED	1354 THROUGH 1355	
		ROMEO SSK	1356	
		SAVA SSK	1357	
		SUTJESKA SSK	1358	
		TANGO SSK	1359	
		UPHOLDER SSK	1360	
		WHISKEY SSK	1361	
		WHISKEY V SSK	1362	
		ZULU IV SSK	1363	
		DORIS SSK	1364	
		VICTORIA SSK	1365	
		TYPE 212 SSK	1366	
		UNDEFINED	1367 THROUGH 1665	
		SSC GENERAL	1666	
		DELFINEN SSC	1667	
		DRAKEN SSC	1668	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

809	001	SUBSURFACE (MARITIME) SPECIFIC (CONTINUED) TYPE		
-----	-----	--	--	--

NAECKEN SSC	1669	
NARHVALEN SSC	1670	
SJOORMEN SSC	1671	
TOTI TYPE 1075 SSC	1672	
TYPE 205 SSC	1673	
TYPE 206 SSC	1674	
KOBBERN SSC	1675	
TYPE 209 (TYPE 1100) SSC	1676	
TYPE 209 (TYPE 1200) SSC	1677	
TYPE 209 (TYPE 1300) SSC	1678	
TYPE 209 (TYPE 1400) SSC	1679	
TYPE 209 (TYPE 1500) SSC	1680	
ULA SSC	1681	
TYPE 211 SSC	1682	
VASTERGOETLAND SSC	1683	
TYPE 206A SSC	1684	
UNDEFINED	1685	THROUGH 1945
SSA GENERAL	1946	
BRAVO SSA	1947	
DOLPHIN (AGSS) SSA	1948	
GOLF I SSA	1949	
GOLF I (MODIFIED) SSA	1950	
GOLF II SSA	1951	
INDIA SSA	1952	
LIMA SSA	1953	
ROMEO SSA	1954	
ZULU SSA	1955	
UNDEFINED	1956	THROUGH 4069
SUBSURFACE SPECIFIC	4070	THROUGH 4094
TYPE 1-25		
RESET TO NO STATEMENT	4095	

810	001	LAND (GROUND) SPECIFIC TYPE		
-----	-----	-----------------------------	--	--

NO STATEMENT	0	
TOW	1	
DRAGON	2	
LANCE	3	
SHILLEAGH	4	
SERGEANT	5	
AMMUNITION	6	

THE SPECIFIC TYPE OF POINT OR TRACK
WITH AN ENVIRONMENT/CATEGORY OF
LAND (GROUND).

5.3-578

MIL-STD-6016B

FIELD CODING FOR J14.2C5

(SHEET 74)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE -----	(CONTINUED)	
		POL	7	
		OBSERVATION POSTS	8	
		RADIO DIRECTION FINDER	9	
		RIVER	10	
		STREAM	11	
		LAKE	12	
		MARSH/SWAMP	13	
		MOUNTAIN	14	
		HILLTOP	15	
		RIDGE	16	
		DEPRESSION	17	
		VALLEY	18	
		CAVE	19	
		BRIDGE	20	
		DAM	21	
		BUILDING	22	
		VILLAGE	23	
		TOWN	24	
		ROAD INTERSECTION	25	
		HOSPITAL	26	
		HAWK	27	
		I-HAWK	28	
		PATRIOT	29	
		NIKE	30	
		REDEYE	31	
		STINKER	32	
		HELLFIRE	33	
		PERSHING	34	
		JEEP	35	
		CAR	36	
		MOTORCYCLE	37	
		BICYCLE	38	
		AMPHIBIOUS VEHICLE	39	
		RIVER CROSSING EQUIPMENT	40	
		MECHANIZED MINE SWEEPER	41	
		MOBILE RADAR	42	
		SMOKE GENERATOR	43	
		(SSSB) SHIP SHORE SHIP BUFFER	44	
		(RADIL) ROCC AWACS	45	
		DIGITAL INTERFACE LINK		
		(ASIT) ADAPTABLE SURFACE INTERFACE TERMINAL	46	

5.3-579

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		(AEGIS) AEW GROUND	47	
		INTERFACE SEGMENT		
		AMBULANCE	48	
		BIOLOGICAL WEAPONS	49	
		CHEMICAL WEAPONS	50	
		NUCLEAR WEAPONS	51	
		ENGINEER VEHICLES	52	
		GENERATOR	53	
		JAMMERS	54	
		MAINTENANCE VEHICLE	55	
		MULTIPLE ROCKET LAUNCHER	56	
		RADIO	57	
		REMOTE SENSOR	58	
		SELF PROPELLED ARTILLERY	59	
		TACTICAL BRIDGE	60	
		TOWED ARTILLERY GUN	61	
		RECOILLESS RIFLE	62	
		(TACCP) TACTICAL COMMAND	63	
		POST		
		BRIGADE	64	
		CORPS	65	
		GROUP	66	
		DIVISION	67	
		REGIMENT	68	
		BATTALION	69	
		COMPANY	70	
		PLATOON	71	
		SQUADRON	72	
		AIRBASE	73	
		WING	74	
		ANTI-AIRCRAFT GUN	75	
		AIR DEFENSE ARTILLERY	76	
		GUN		
		MORTAR	77	
		FLAMETHROWER	78	
		TSC/MOCC/MARITIME	79	
		HEADQUARTERS		
		MAIN BATTLE TANK	80	
		MEDIUM TANK	81	
		LIGHT TANK	82	
		TRAIN	83	
		ARMORED PERSONNEL	84	
		VEHICLE		

FIELD CODING FOR J14.2C5

(SHEET 76)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE -----	(CONTINUED)	
		ARMORED INFANTRY	85	
		FIGHTING VEHICLE		
		LIGHT TRUCK	86	
		MEDIUM TRUCK	87	
		HEAVY TRUCK	88	
		TANK TRANSPORTER	89	
		DUMMY	90	
		TRAP	91	
		POINT TARGET	92	
		EA SITE	93	
		ARMORED PERSONNEL	94	
		CARRIER		
		ARMORED INFANTRY	95	
		FIGHTING VEHICLE		
		GCI SITE	96	
		CRC	97	
		TACC (AF)	98	
		CRP	99	
		TACC (MC)	100	
		MPC	101	
		TAOC	102	
		AADCCS (AN/TSQ-73)	103	
		DASC	104	
		FACP	105	
		FASC	106	
		AADCP	107	
		ASRT	108	
		NCC	109	
		RCC	110	
		ROCC	111	
		DC	112	
		WOC	113	
		(ASOC) AIR SUPPORT	114	
		OPERATIONS CENTER		
		(TCO) TACTICAL COMBAT	115	
		OPERATIONS CENTER		
		(TOC) TACTICAL	116	
		OPERATIONS CENTER		
		(ARMY)		
		CHAPPARAL	117	
		FIRE DIRECTION CENTER	118	
		FIRE UNIT	119	
		DIVARTY	120	

5.3-581

MIL-STD-6016B

FIELD CODING FOR J14.2C5 (SHEET 77)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE -----	(CONTINUED)	
		BATTERY	121	
		SELF-PROPELLED ARTILLERY	122	
		(GOC) GROUND OPERATIONS CENTER	123	
		(ICC) INFORMATION COORDINATION CENTER	124	
		(BOC) BATTERY OPERATIONS CENTER	125	
		(ECS) ENGAGEMENT CONTROL STATION	126	
		(PCP) PLATOON COMMAND POST	127	
		(CRG) COMMUNICATIONS RELAY GROUP	128	
		TUNNELS	129	
		RAILYARDS	130	
		BENCHMARK	131	
		TROOP	132	
		LANDING ZONE	133	
		DROP ZONE	134	
		ASSEMBLY OR STAGING AREA	135	
		DECONTAMINATION SITE	136	
		RE-ENTRY POINT/LINE CROSSING AREA FOR RECON PATROLS	137	
		SAM	138	
		SSM	139	
		ANTI-TANK WEAPON	140	
		DIRECT SUPPORT	141	
		GENERAL SUPPORT	142	
		INTERCEPTION	143	
		BLOCKING	144	
		REINFORCING	145	
		REDEPLOYMENT	146	
		POLICING	147	
		INTRUDING	148	
		PREPARING BARRIER	149	
		DUMPING EQUIPMENT	150	
		RELIEF	151	
		CONVOY	152	
		ANTI-AIRCRAFT	153	
		AIR DEFENSE ARTILLERY	154	
		ARTILLERY	155	

5.3-582

MIL-STD-6016B

FIELD CODING FOR J14.2C5

(SHEET 78)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	
		SURVEILLANCE	156	
		PICKETING	157	
		LOGISTICS SUPPORT	158	
		SEARCH	159	
		DIRECT ARTILLERY SUPPORT	160	
		GENERAL ARTILLERY	161	
		SUPPORT		
		MAINTAINING LINE OF	162	
		COMMUNICATION		
		COMMITTING	163	
		COUNTER-ATTACK	164	
		ELECTRONIC WARFARE	165	
		THREATEN	166	
		DESTROY	167	
		CONTACT	168	
		EVALUATION	169	
		TRANSPORTER	170	
		ARMORED VEHICLE	171	
		GUN	172	
		HALF TRACK	173	
		COMMUNICATIONS EQUIPMENT	174	
		TARGET	175	
		AIR DEFENSE SITE	176	
		FIM-92 STINGER	177	
		NIM-23 HAWK	178	
		MIM-42 REDEYE	179	
		MIM-72 CHAPARRAL	180	
		MIM-104 PATRIOT	181	
		RIM-2 TERRIER	182	
		RIM-7 SEA SPARROW	183	
		RIM-8 TALOS	184	
		RIM-24 TARTAR	185	
		RIM-66 STANDARD MISSILE	186	
		RIM-67 STANDARD MISSILE	187	
		BLOWPIPE	188	
		DISUSED	189 THROUGH 190	
		SEA DART	191	
		DISUSED	192 THROUGH 193	
		CROTAL	194	
		RAPIER	195	
		RBS-70/GIRAFFE	196	
		SAM BLOODHOUND	197	
		SAM ROLAND	198	

5.3-583

MIL-STD-6016B

FIELD CODING FOR J14.2C5

(SHEET 79)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE -----	(CONTINUED)	
		SA-2 GUIDELINE	199	
		SA-3 GOA	200	
		SA-4 GANEF	201	
		SA-N-3 GOBLET	202	
		SA-5 GAMMON	203	
		SA-N-4 GECKO	204	
		SA-6 GAINFUL	205	
		SA-N-6 GRUMBLE	206	
		SA-7 GRAIL	207	
		SA-8 GECKO	208	
		SA-9 GASKIN	209	
		SA-10 GRUMBLE	210	
		SA-11 GADFLY	211	
		SA-12	212	
		SA-13 GOPHER	213	
		MISTRAL	214	
		SA-N-7 GADFLY	215	
		SA-N-8 GREMLIN	216	
		SA-14 GREMLIN	217	
		SA-16 GIMLET	218	
		SA-X-17	219	
		TOC (THAAD)	220	
		SSI (THAAD)	221	
		LCS (THAAD)	222	
		LAUNCHER (THAAD)	223	
		TMD-GBR (THAAD)	224	
		JTAGS	225	
		ADTOC/BN	226	
		ADTOC/BDE	227	
		ADCP	228	
		SM-2 BLOCK II	229	
		SM-2 BLOCK III	230	
		SM-2 BLOCK IIIA	231	
		SM-2 BLOCK IIIB	232	
		SM-2 BLOCK IV	233	
		SM-2 BLOCK IVA	234	
		SM-3 LEAP	235	
		SA-N-5 GRAIL	236	
		SA-N-11 GRISOM	237	
		SA-12A GLADIATOR	238	
		SA-12B GIANT	239	
		SA-14 GREMLIN	240	
		SA-15 GAUNTLET	241	

5.3-584

MIL-STD-6016B

FIELD CODING FOR J14.2C5

(SHEET 80)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		SA-17 GRIZZLY	242	
		SA-N-12 GRIZZLY	243	
		SA-18 GROUSE	244	
		SA-19 GRISOM	245	
		RIM-116 RAM	246	
		ADATS	247	
		JAVELIN	248	
		STARBURST	249	
		STARSTREAK	250	
		ASPIDE	251	
		FRONT DOOR	252	
		ROLAND II	253	
		AKASH	254	
		ANZA	255	
		ANZA II	256	
		CSA-1	257	
		CSA-2	258	
		CSA-4	259	
		CSA-5	260	
		FM-80	261	
		HN-5	262	
		NK-7	263	
		NK-16	264	
		PANTZYR	265	
		RAPIER 2000/JERNAS	266	
		RBS-90	267	
		SAKR	268	
		SAVA	269	
		SHANINE	270	
		SKYGUARD ASPIDE	271	
		SPADA	272	
		TAM SAM	273	
		TIGERCAT	274	
		VANGUARD	275	
		SA-N-1 GOA	276	
		SA-N-9 GAUNTLET	277	
		SA-N-10	278	
		ALBATROS/ASPIDE	279	
		SM-1	280	
		SA-2 IRAQ MOD	281	
		SA-2 NORTH KOREA RO	282	
		AEGIS-TI	283	
		MASURGS	284	

5.3-585

MIL-STD-6016B

FIELD CODING FOR J14.2C5

(SHEET 81)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE -----	(CONTINUED)	
		ROCK CAKE	285	
		SEA INDIGO	286	
		TANSAM	287	
		TOKEN A/D	288	
		GUARDSMAN	289	
		SILKWORM	290	
		SNOW DRIFT 11/17	291	
		TIGER S	292	
		TIGER G	293	
		TUBE ARM SA-11	294	
		SEACAT 262/903/904	295	
		AN/MPQ-4	296	
		AN-TPQ-36	297	
		AN/TPS-25	298	
		CYMBERLINE	299	
		PORK TROUGH 1	300	
		RASIT	301	
		SNAR-6	302	
		TALL MIKE	303	
		AN/FPN-33/36/40	304	
		AN/TPN-12/17	305	
		CPN-4, FPN-16/22	306	
		RP-2E	307	
		RP-4G	308	
		THD-1010/1013	309	
		TPN-8/14/18TSQ-7	310	
		TWO SPOT	311	
		CSA-X-2	312	
		ASR-0	313	
		FALCON-G	314	
		MARCON LN66TPS66	315	
		SHEET BEND	316	
		WALL RUST A/B	317	
		DON-2	318	
		DONKAY/PALM FROND	319	
		EYE SHIELD	320	
		MARELD	321	
		PEEL PAIR	322	
		POT HEAD	323	
		RACAL-DECCA	324	
		RICE FIELD	325	
		RICE SCREEN	326	
		RICE CUP	327	

5.3-586

MIL-STD-6016B

FIELD CODING FOR J14.2C5

(SHEET 82)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE -----	(CONTINUED)	
		SQUARE TIE	328	
		SS-N-2	329	
		STRUT CURVE	330	
		STRUT PAIR	331	
		BOFI	332	
		CORN CAN	333	
		DRUM TILT	334	
		ELDORADO	335	
		FLAP WHEEL	336	
		FLEDERMAUS	337	
		FLYCATCHER	338	
		GEPARD	339	
		GUN DISH	340	
		SPAAMG	341	
		TEAMPLAY	342	
		TEAMWORK	343	
		VULCAN	344	
		9LV 200	345	
		AN/SPG-50	346	
		BASS TILT	347	
		GOALKEEPER	348	
		HAWK SCREECH	349	
		KITE SCREECH A/B	350	
		OWL SCREECH	351	
		MARK 68 FCS	352	
		MK 57/63 GFCS	353	
		MK-86 GFCS	354	
		MUFF COB	355	
		SIGNAAL STIR 180	356	
		SUN VISOR	357	
		TOP BOW	358	
		TYPE 341	359	
		VEGA	360	
		WM-20 SERIES	361	
		MARCONI S613	362	
		THIN SKIN	363	
		AN/FPS-77	364	
		MRL-1	365	
		MRL-4/5	366	
		BIG BIRD	367	
		SIDE NET	368	
		ODD LOT/PAIR/GROUP	369	
		FIRE WHEEL/MOD	370	

5.3-587

MIL-STD-6016B

FIELD CODING FOR J14.2C5

(SHEET 83)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE -----	(CONTINUED)	
		BARLOCK	371	
		FIRECAN/WHIFF	372	
		GIN SLING	373	
		FRUSKA GORA	374	
		TIN SHIELD	375	
		BIG BAR/MESH	376	
		SS-N-S SCOOP PAIR	377	
		SGR-105 DA-01/00	378	
		CROSS SLOT	379	
		BACK NET/TRAP	380	
		GATE POLE/HIGH/POST	381	
		TOP LOT	382	
		RICE CAKE	383	
		JY-14/9	384	
		TIN TRAP	385	
		HEAD NET A/B/C	386	
		SLIM/SEA/HAIR NET	387	
		LOW SIEVE	388	
		EGG CUP	389	
		CUT WEB	390	
		SKYWATCH	391	
		HALF PLATE	392	
		SKIN HEAD	393	
		SIEVE FAMILY	394	
		SO-A	395	
		HIGH SHELL	396	
		AN/FPS-6/89	397	
		DECCA HF200	398	
		MARCONI 5244	399	
		TYPE 88 MK 1	400	
		MARCONI S-247	401	
		AN/MPN-11	402	
		RAT-31S	403	
		AA4 MK 6/7	404	
		AN/TPS-43	405	
		SCR-584	406	
		AN/TPS-48	407	
		MARCONI S-1006/269	408	
		PALMIER	409	
		FIREFINDER LR	410	
		VOLEX III/IV	411	
		THD-1940	412	
		HADR (HR-3000)	413	

5.3-588

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE -----	(CONTINUED)	
		AN/RPS-70/72/75	414	
		MPDR-18/S	415	
		WATCHMAN	416	
		MARCONI S-631/647	417	
		MARCONI S-706/711/712	418	
		AN/TPS-73	419	
		TRS-22XX	420	
		AN/SPS-8	421	
		DECCA AWS-1	422	
		MK-26	423	
		AN/SPS-48	424	
		RAN-7S	425	
		SEA TIGER	426	
		DA-08/2LS	427	
		AWS-9 (TYPE 996)	428	
		DA-05/00	429	
		MPDR-45	430	
		TOP STEER/PLATE	431	
		STRIKE OUT	432	
		SPONGE CAKE	433	
		NC1 ROLAND	434	
		NC1 MISTRAL	435	
		FDOC	436	
		MCT	437	
		CETAC	438	
		ISARD	439	
		UNDEFINED	440 THROUGH 4000	
		WAYPOINT	4001	
		STRIKE INITIAL POINT	4002	
		UNDEFINED	4003 THROUGH 4093	
		RESET TO NO STATEMENT	4094	
		UNDEFINED	4095	
754	001	LOCAL DISCRETE IDENTIFIER -----		LOCALLY DEFINED AMPLIFYING DATA CONCERNING A REPORTED OBJECT OR TRACK WITH DISCRETE MEANINGS ESTABLISHED BY THE OPERATIONAL COMMANDER.
		NO STATEMENT	0	
		NUMERIC	1 THROUGH 4094	LOCALLY DEFINED MEANINGS.
		RESET TO NO STATEMENT	4095	

5.3-589

MIL-STD-6016B

WORD MAP

WORD NUMBER: J14.2C6

WORD TITLE: ELECTRONIC WARFARE CONTROL/COORDINATION CONTINUATION WORD 6

24	23	22	21:	20	19	18	17:	16	15	14:	13	12	11	10:	09	08:	07:	06	05	04	03	02:	01	00:							
TIME SHARING				:					:	EMISSION				:	PLAN				:	CONTINUATION WORD				:	WORD	:					
IMPLEMENTATION				:	SPARE				:	PLN MOD				:	CONTROL PLAN				:	SOURCE				:	SP	:	FORMAT	:			
				:					:					:					:	LABEL				:		:		:			
6				:	4				:	3				:	4				:	2				:	1	:	5		:	2	:
49	48	47	46:	45	44	43	42	41	40:	39	38	37:	36	35	34	33	32	31:	30	29	28	27:	26	25							
CIRCUIT				:	PLATFORM TYPE				:	CHANGE				:	RADIATION				:	RADIATION RESTRICTION				:	RADIATION				:	---	>
				:					:	RADIATION				:	STATUS				:					:	INDICATOR				:		:
				:					:	FACTOR				:					:					:					:		:
6				:	6				:	3				:	6				:	4				:					:		:
				:	69	68:	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52:	51	50							
				:	SP				:	LORAN FILTER SETTING																:	---		>		
				:					:																	:			:		
				:	2				:	16																:			:		

WORD DESCRIPTION

WORD NUMBER: J14.2C6

WORD TITLE: ELECTRONIC WARFARE CONTROL/COORDINATION CONTINUATION WORD 6

REFERENCE			BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR		POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT		0-	1 2	01
1551 001	CONTINUATION WORD LABEL		2-	6 5	00110
756 001	SPARE (SP)		7	1	
1836 001	PLAN SOURCE (PLN SRC)		8-	9 2	
1822 001	EMISSION CONTROL PLAN		10-	13 4	
1824 001	PLAN MODIFICATION (PLN MOD)		14-	16 3	
756 004	SPARE		17-	20 4	
1834 001	TIME SHARING IMPLEMENTATION		21-	26 6	
1818 001	RADIATION STATUS INDICATOR		27-	30 4	
1825 001	RADIATION RESTRICTION		31-	36 6	
1826 001	CHANGE RADIATION FACTOR		37-	39 3	
1802 001	PLATFORM TYPE		40-	45 6	
1827 001	CIRCUIT		46-	51 6	
771 001	LORAN FILTER SETTING		52-	67 16	
756 002	SPARE (SP)		68-	69 2	

FIELD CODING FOR J14.2C6

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1836	001	PLAN SOURCE -----		DEFINES THE SOURCE OF THE PLAN.
		NO STATEMENT	0	
		LOCAL/PROMULGATED BY FORCE COMMANDER	1	
		PREPLANNED/STANDING OPERATION ORDER	2	
		UNDEFINED	3	
1822	001	EMISSION CONTROL PLAN -----		A LETTER OR NUMBER THAT IDENTIFIES A SPECIFIC EMISSION CONTROL PLAN AS IDENTIFIED IN AN OPERATIONS ORDER.
		NO STATEMENT	0	
		1 OR A	1	
		2 OR B	2	
		3 OR C	3	
		4 OR D	4	
		5 OR E	5	
		6 OR F	6	
		7 OR G	7	
		8 OR H	8	
		9 OR I	9	
		10 OR J	10	
		11 OR K	11	
		12 OR L	12	
		13 OR M	13	
		14 OR N	14	
		15 OR O	15	
1824	001	PLAN MODIFICATION -----		IDENTIFIES THE ELEMENT WITHIN THE PLAN WHICH IS TO BE MODIFIED.
		NO STATEMENT	0	
		EMITTER	1	
		PLATFORM	2	
		RADIATION RESTRICTION	3	
		RADIATE TIME INCREASE	4	
		RADIATE TIME DECREASE	5	
		UNDEFINED	6 THROUGH 7	
1834	001	TIME SHARING IMPLEMENTATION -----		IDENTIFIES THE EMITTER TYPE FOR WHICH THE TIME SHARING PLAN IS TO BE IMPLEMENTED.
		NO STATEMENT	0	
		ALL EMITTERS IN PLAN	1	

FIELD CODING FOR J14.2C6

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1834	001	TIME SHARING IMPLEMENTATION	(CONTINUED)	

		RADAR SURFACE	2	
		NAVIGATION		
		RADAR SURFACE SEARCH	3	
		RADAR SURFACE AIRBORNE	4	
		EARLY WARNING		
		RADAR SURFACE HEIGHT	5	
		FINDERS		
		RADAR SURFACE 3D	6	
		RADAR SURFACE FIRE	7	
		CONTROL GUN		
		RADAR SURFACE FIRE	8	
		CONTROL MISSILE		
		RADAR AIRBORNE EARLY	9	
		WARNING		
		RADAR AIRBORNE	10	
		INTERCEPT (AI)		
		RADAR GROUND AIR DEFENSE	11	
		ARTILLERY		
		RADAR GROUND COUNTER	12	
		MORTAR/COUNTER BATTERY		
		RADAR GROUND LONG	13	
		RANGE SURVEILLANCE		
		RADAR GROUND MEDIUM	14	
		RANGE SURVEILLANCE		
		RADAR GROUND SHORT	15	
		RANGE SURVEILLANCE		
		JAMMER, COMMUNICATION	16	
		JAMMER, NON-COMMUNICA-	17	
		TION		
		UNDEFINED	18 THROUGH 63	
1818	001	RADIATION STATUS INDICATOR		INDICATES THE EMISSION CONTROL
		-----		RADIATION STATUS.
		NO STATEMENT	0	
		ALPHA	1	SAFETY: EQUIPMENT MAY BE OPERATED IF
				ESSENTIAL TO SAFE CONDUCT OF
				OPERATIONS.
		BRAVO	2	EQUIPMENT MAY BE OPERATED IN ACTIVE
				MODE.
		ECHO	3	ESSENTIAL MISSIONS: MINIMUM
				RADIATION IS TO BE USED INVOLVING
				THE RADIATION OF ELECTROMAGNETIC
				AND ACOUSTIC EQUIPMENT ONLY TO THE

5.3-593

MIL-STD-6016B

FIELD CODING FOR J14.2C6

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1818	001	RADIATION STATUS INDICATOR -----	(CONTINUED)	
		GOLF	4	LIMITED DEGREE AND FOR THE MINIMUM TIME REQUIRED TO ACCOMPLISH A SPECIFIC MISSION OR TASK. GUARD: DESIGNATED UNIT(S) IS/ARE TO OPERATE EQUIPMENT OR MAINTAIN GUARD ON DESIGNATED CIRCUITS ON BEHALF OF OTHER UNITS (IFF GUARDS KEEP PARENT RADARS SILENT). HELICOPTER OPERATIONS: ESSENTIAL OPERATIONS ARE AUTHORIZED BY UNITS DIRECTLY INVOLVED IN THE DIRECTION OF HELICOPTERS.
		HOTEL	5	LAUNCHING AND LANDING AIRCRAFT: ESSENTIAL OPERATION IS AUTHORIZED WHEN LAUNCHING AND LANDING AIRCRAFT.
		LIMA	6	OPERATION IS DIRECTED: MUST BE OPERATED IN THE ACTIVE MODE. WILL BE USED TO SIMULATE THE TRAFFIC NORMALLY ASSOCIATED WITH THE CIRCUITS.
		OSCAR	7	SILENCE: NO EMISSIONS ARE TO BE MADE EXCEPT THE STANDARD OCCASIONS FOR BREAKING EMCON. EQUIPMENT IS TO BE IN A HIGH STATE OF READINESS WITHOUT ACTUAL RADIATION.
		SIERRA	8	TIME SHARING: EQUIPMENT IS TO BE OPERATED IN ACCORDANCE WITH THE TIME SHARING PLAN IN EFFECT BETWEEN UNITS OF THE FORCE. UNIQUE EMITTERS IDENTIFIED BY THE OFFICER IN TACTICAL COMMAND ARE NOT TO BE RADIATED.
		TANGO	9	TOTAL SILENCE: NO EMISSION IS AUTHORIZED. EQUIPMENT MAIN POWER SOURCE SECURED.
		XRAY	10	
		UNDEFINED	11 THROUGH 15	
1825	001	RADIATION RESTRICTION -----		IDENTIFIES THE EQUIPMENT TYPE/ FREQUENCY RANGE OF EMITTERS TO WHICH RADIATION RESTRICTIONS ARE IMPLEMENTED.
		NO STATEMENT	0	

5.3-594

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1825	001	RADIATION RESTRICTION	(CONTINUED)	

		ALL SEARCH/HEIGHT FINDER RADARS	1	
		ALL FIRE CONTROL/MISSILE CONTROL (FC/MC) RADARS	2	
		ALL EW EQUIPMENT	3	
		ALL NAVIGATION AIDS (NAVAIDS)	4	
		ALL ACOUSTIC EQUIPMENT	5	
		ALL COMMUNICATIONS	6	
		A/B BAND SEARCH/HEIGHT FINDER RADARS	7	
		C/D BAND SEARCH/HEIGHT FINDER RADARS	8	
		E/F BAND SEARCH/HEIGHT FINDER RADARS	9	
		G/H BAND SEARCH/HEIGHT FINDER RADARS	10	
		I BAND SEARCH/HEIGHT FINDER RADARS	11	
		J BAND SEARCH/HEIGHT FINDER RADARS	12	
		K BAND SEARCH/HEIGHT FINDER RADARS	13	
		E/F BAND FC/MC RADARS	14	
		G/H BAND FC/MC RADARS	15	
		I BAND FC/MC RADARS	16	
		J BAND FC/MC RADARS	17	
		K BAND FC/MC RADARS	18	
		ALL JAMMERS	19	
		A/B BAND JAMMERS	20	
		C/D BAND JAMMERS	21	
		E/F BAND JAMMERS	22	
		G/H BAND JAMMERS	23	
		I BAND JAMMERS	24	
		J BAND JAMMERS	25	
		K BAND JAMMERS	26	
		COMMUNICATIONS JAMMERS	27	
		ALL DECEPTIVE ELECTRONIC ATTACK (DEA)	28	
		E/F BAND DEA	29	
		G/H BAND DEA	30	
		I BAND DEA	31	
		J BAND DEA	32	

FIELD CODING FOR J14.2C6

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1825	001	RADIATION RESTRICTION	(CONTINUED)	

		K BAND DEA	33	
		ULTRA HIGH FREQUENCY/ VERY HIGH FREQUENCY (UHF/VHF) BEACONS	34	
		LOW FREQUENCY/MEDIUM FREQUENCY (LF/MF) BEACONS	35	
		RADAR ALTIMETERS	36	
		IFF INTERROGATORS	37	
		IFF TRANSPONDERS	38	
		HELICOPTER TRANSPONDERS	39	
		TACAN	40	
		DOPPLER EQUIPMENT	41	
		FATHOMETERS	42	
		UNDERWATER TELEPHONE	43	
		NOISE MAKERS	44	
		SIMULATORS	45	
		SHORT RANGE SONAR	46	
		MEDIUM RANGE SONAR	47	
		LONG RANGE SONAR	48	
		EXPLOSIVE ECHO SOUNDERS	49	
		ALL UHF COMMUNICATIONS	50	
		ALL VHF COMMUNICATIONS	51	
		ALL MF/HIGH FREQUENCY (HF) COMMUNICATIONS	52	
		ALL SUPER HIGH FREQUENCY (SHF) COMMUNICATIONS	53	
		HF DATALINK	54	
		UHF DATALINK	55	
		ALL TRANSMITTERS COMMUNICATIONS	56	
		ALL RECEIVERS COMMUNICATIONS	57	
		SATELLITE COMMUNICATIONS (SATCOM)	58	
		METEOROLOGICAL AIDS (METAIDS)/RADIOSONDE	59	
		CIRCUITS SPECIFIED IN CIRCUIT FIELD	60	
		UNDEFINED	61 THROUGH 63	
1826	001	CHANGE RADIATION FACTOR		THE MULTIPLIER TO BE APPLIED TO THE RADIATE TIME IN THE TIME SHARING

5.3-596

MIL-STD-6016B

FIELD CODING FOR J14.2C6

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1826	001	CHANGE RADIATION FACTOR -----	(CONTINUED)	
		NO STATEMENT	0	PLAN IN EFFECT.
		DOUBLE	1	
		TRIPLE	2	
		HALF	3	
		ONE THIRD	4	
		UNDEFINED	5 THROUGH 7	
1802	001	PLATFORM TYPE -----		THE PLATFORM/SITE TYPE WHICH IS TO MODIFY THEIR PARTICIPATION IN THE EMISSION CONTROL PLAN ORDERED OR IN EFFECT.
		NO STATEMENT	0	
		ALL SURFACE	1	
		CV	2	
		DD, DDG	3	
		CG	4	
		FF, FFG, FFL	5	
		PATROL CRAFT	6	
		MINE WARFARE	7	
		LPA, LHA	8	
		OTHER AMPHIBIOUS	9	
		SUPPORT UNITS	10	
		OILER/TANKER	11	
		OTHER SURFACE UNITS	12	
		ALL AIRCRAFT	13	
		FIGHTER/INTERCEPTOR	14	
		FIGHTER/BOMBER ATTACK	15	
		BOMBER	16	
		HELICOPTER	17	
		ATTACK HELICOPTER	18	
		DRONE/RPV/UAV	19	
		SUPPORT AIRCRAFT	20	
		PATROL AIRCRAFT	21	
		AEW AIRCRAFT	22	
		CAP AIRCRAFT	23	
		SAR AIRCRAFT	24	
		OTHER AIRCRAFT	25	
		ALL SUBSURFACE	26	
		ATTACK SUBSURFACE	27	
		FBM SUBSURFACE	28	
		ALL LAND	29	
		SAM SITE	30	

FIELD CODING FOR J14.2C6

(SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1802	001	PLATFORM TYPE -----	(CONTINUED)	
		AAA SITE	31	
		GCI SITE	32	
		EA SITE	33	
		AIR BASE	34	
		COMMAND CENTER	35	
		FIELD ARTILLERY SITE	36	
		ES SITE	37	
		ADA SITE	38	
		COMMUNICATION CENTERS	39	
		BATTLEFIELD SURVEILLANCE SITE	40	
		CM/CB SITE	41	
		OTHER LAND	42	
		UNDEFINED	43 THROUGH 63	
1827	001	CIRCUIT -----		THE SPECIFIC COMMUNICATION CIRCUIT WHICH IS TO HAVE THE RADIATION RESTRICTION MODIFIED.
		NO STATEMENT	0	
		COMMAND AND CONTROL	1	
		NON DATA LINK		
		INTELLIGENCE/EW NON DATA LINK	2	
		SUPPORT NON DATA LINK	3	
		AIR DEFENSE NON DATA LINK	4	
		FIRE SUPPORT/CONTROL NON DATA LINK	5	
		RELAY NON DATA LINK	6	
		FLIGHT OPERATIONS NON DATA LINK	7	
		UNDEFINED	8 THROUGH 63	
771	001	LORAN FILTER SETTING -----		USED TO PRESET LORAN FILTER TO REJECT REPORTED INTERFERENCE. COMPLETE WORD IS INSERTABLE INTO LORAN EQUIPMENT TO SELECT FILTERS.
		NO STATEMENT	0	
		130/65,536 THROUGH 129 65,406/65,536 KHZ	1 THROUGH 65535	IN 130/65,536 KHZ INCREMENTS (APPROX. 2HZ).

5.3-598

MIL-STD-6016B

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: ELECTRONIC WARFARE CONTROL/COORDINATION CONTINUATION WORD 7

<---

CALLSIGN, OBSERVED

60

```

:
:
: SPARE
:

```

WORD DESCRIPTION

WORD NUMBER: J14.2C7

WORD TITLE: ELECTRONIC WARFARE CONTROL/COORDINATION CONTINUATION WORD 7

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	00111
1850 001	CALLSIGN, OBSERVED (CAL SGN)	7-	66 60	
756 003	SPARE	67-	69 3	

FIELD CODING FOR J14.2C7 (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1850	001	CALLSIGN, OBSERVED		REPORTS THE OBSERVED CALLSIGN.

		CALLSIGN, OBSERVED		THE 60 BITS ARE DIVIDED INTO TEN GROUPS OF 6 BITS. EACH GROUP IS INTERPRETED INDEPENDENTLY IN ACCORDANCE WITH THE FOLLOWING CODE:
		BLANK	0	
		1	1	
		2	2	
		3	3	
		4	4	
		5	5	
		6	6	
		7	7	
		8	8	
		9	9	
		A	10	
		B	11	
		C	12	
		D	13	
		E	14	
		F	15	
		G	16	
		H	17	
		I	18	
		J	19	
		K	20	
		L	21	
		M	22	
		N	23	
		O	24	
		P	25	
		Q	26	
		R	27	
		S	28	
		T	29	
		U	30	
		V	31	
		W	32	
		X	33	
		Y	34	
		Z	35	
		UNDEFINED	36 THROUGH 62	
		ZERO	63	

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: ELECTRONIC WARFARE CONTROL/COORDINATION CONTINUATION WORD 8

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25	
																			:						
<---																			:	--->					
																			:	---					
																			:	--->					
																			:						

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50
:																				
:																				
:											SPARE									
:																				
:											39									

WORD DESCRIPTION

WORD NUMBER: J14.2C8

WORD TITLE: ELECTRONIC WARFARE CONTROL/COORDINATION CONTINUATION WORD 8

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	01
1551 001	CONTINUATION WORD LABEL	2-	6 5	01000
362 015	PRF/PRI INDICATOR (PRI IND)	7	1	
440 006	PULSE REPETITION FREQUENCY	8-	30 23	
1903 001	PULSE REPETITION INTERVAL	8-	30 23	
756 039	SPARE	31-	69 39	

FIELD CODING FOR J14.2C8

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
362	015	PRF/PRI INDICATOR ----- PRF BEING REPORTED PRI BEING REPORTED	0 1	INDICATES WHETHER PRF OR PRI IS BEING REPORTED.
440	006	PULSE REPETITION FREQUENCY ----- UNKNOWN/NO STATEMENT 0.1 THROUGH 838,860.6 PULSES PER SECOND 131,071 PULSES PER SECOND OR GREATER	0 1 THROUGH 8388606 8388607	THE RATE AT WHICH PULSES OR PULSE GROUPS ARE TRANSMITTED. PULSES PER SECOND IN ONE TENTH OF A PULSE PER SECOND INCREMENTS. TRANSMITTED ONLY BY A DATA FORWARDER.
1903	001	PULSE REPETITION INTERVAL ----- UNKNOWN/NO STATEMENT 4 THROUGH 33,554,428 NANOSECONDS	0 1 THROUGH 8388607	THE INTERVAL OF TIME BETWEEN TWO TRANSMITTED PULSES OR PULSE GROUPS. PULSE REPETITION INTERVAL IN FOUR NANOSECOND INCREMENTS.

TABLE J15-1. J15 Threat Warning Word Applicability Table

INITIAL WORD	SUBLABEL							
	J15.0I THREAT WARNING							
EXTENSION WORD - 0	J15.0E0							
CONTINUATION WORD - 0								
1	J15.0C1 THREAT WARNING							
...								
...								
...								
...								
...								
...								
...								
31								

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

J15.0 MESSAGE SUMMARY

PURPOSE

The J15.0 Threat Warning Message provides the capability for threat warning to targeted friendly platforms to include threat type, threat posture, position/relative position, altitude, and speed.

DATA ELEMENT SUMMARY

<u>J15.0I</u>		<u>J15.0C1 (Continued)</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	ENVIRONMENT/CATEGORY	3
LABEL, J-SERIES	5		
SUBLABEL, J-SERIES	3		
MESSAGE LENGTH INDICATOR	3		
TRACK NUMBER, ADDRESSEE	15		
THREAT POSTURE	3		
SPARE	2		
TRACK NUMBER, THREAT	19		
STRENGTH	4		
EXERCISE INDICATOR	1		
THREAT TYPE	4		
THREAT WEAPON	5		
SPARE	4		

<u>J15.0E0</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
SPARE	2
LATITUDE, 0.0051 MINUTE	21
SPARE	2
LONGITUDE, 0.0051 MINUTE	22
SPARE	2
TRACK NUMBER, TARGETED	19

<u>J15.0C1</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
CONTINUATION WORD LABEL	5
SPARE	4
COURSE	9
SPEED	11
ALTITUDE, 25 FT	13
THREAT FUEL	5
SPARE	6
SPACE SPECIFIC TYPE(12)*****	
AIR SPECIFIC TYPE(12)	*
SURFACE (MARITIME) SPECIFIC	*
TYPE(12)	*
SUBSURFACE (MARITIME) SPECIFIC	*
TYPE(12)	*
LAND (GROUND) SPECIFIC	*
TYPE(12)	*
SPARE(12)*****	12

MIL-STD-6016B

J15.0 TRANSMIT/RECEIVE RULES

TITLE: Threat Warning Message

TRANSMIT RULES

1. The J15.0B Threat Warning basic message consists of the J15.0I Threat Warning initial word and the J15.0E0 Threat Warning extension word. The J15.0B basic message shall be transmitted by those units recognizing an immediate threat to another unit(s).
2. The J15.0B message shall be transmitted twice as either an addressed or a broadcast message on the Surveillance Network PG.
3. When cancelling a threat, the J15.0B basic message shall be transmitted with the Threat Posture field set to value 5, Cancel.
4. If additional information contained in the J15.0C1 word is known about the threat, the J15.0C1 word shall be transmitted with the J15.0B basic message.
5. Information that updates a track which has previously been reported as a threat, shall be transmitted in the applicable J3 series message on the Surveillance Network PG.

RECEIVE RULES

The J15.0 message shall not be filtered.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J15.0I

WORD TITLE: THREAT WARNING INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00	:									
TRACK NUMBER, ADDRESSEE												:	MESSAGE	:	SUBLABEL,	:	WORD						:											
												:	LENGTH	:	J-SERIES	:	LABEL, J-SERIES						:	FORMAT	:									
												:	INDICATOR	:							:		:											
15												:	3	:	3	:	5						:	2	:									
49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25	:									
TRACK NUMBER, THREAT																:	SP	:	THREAT POSTURE				:	---				>						
																:		:					:					:						
19																:	2	:	3				:					:						
					:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50	:								
					:	SPARE					:	THREAT WEAPON					:	THREAT TYPE					:	EX	:	STRENGTH					:	---		>
					:						:						:						:	IND	:						:			:
					:	4					:	5					:	4					:	1	:	4					:			:

WORD DESCRIPTION

WORD NUMBER: J15.0I

WORD TITLE: THREAT WARNING INITIAL WORD

REFERENCE			BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS		RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1	2	00
270 004	LABEL, J-SERIES	2-	6	5	01111
271 005	SUBLABEL, J-SERIES	7-	9	3	000
800 001	MESSAGE LENGTH INDICATOR	10-	12	3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
769 006	TRACK NUMBER, ADDRESSEE	13-	27	15	
401 001	THREAT POSTURE	28-	30	3	
756 002	SPARE (SP)	31-	32	2	
769 055	TRACK NUMBER, THREAT	33-	51	19	
386 013	STRENGTH	52-	55	4	
385 003	EXERCISE INDICATOR (EX IND)	56		1	
1762 002	THREAT TYPE	57-	60	4	
399 018	THREAT WEAPON	61-	65	5	
756 004	SPARE	66-	69	4	

FIELD CODING FOR J15.01

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	006	TRACK NUMBER, ADDRESSEE -----		THE TN OF A UNIT (I.E., JU OR PU) TO WHICH A MESSAGE IS ADDRESSED.
		NO STATEMENT NUMERIC	0 00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		ILLEGAL NUMERIC	00077 (OCTAL) 00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC	00177 (OCTAL)	COLLECTIVE ADDRESS.
		NUMERIC	00200 THROUGH 07776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL NUMERIC	07777 (OCTAL) 10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
401	001	THREAT POSTURE -----		DESCRIBES THE CURRENT POSTURE OF A KNOWN THREAT.
		DISUSED	0	
		SEARCH/SURVEILLANCE	1	THE THREAT IS ATTEMPTING TO LOCATE/ IDENTIFY THE TARGETED/ADDRESSEE TN. IF THE TARGETED TN IS SET TO NO STATEMENT, THE ADDRESSEE TN IS THE OBJECT THAT THE THREAT TN IS TARGETED AGAINST.
		READY TO LAUNCH/FIRE	2	THE THREAT IS PREPARING TO LAUNCH/ FIRE A WEAPON AT THE TARGETED/ ADDRESSEE TN. IF THE TARGETED TN IS SET TO NO STATEMENT, THE ADDRESSEE TN IS THE OBJECT THAT THE THREAT TN IS TARGETED AGAINST.
		LAUNCHED/FIRED	3	THE THREAT HAS LAUNCHED/FIRED A WEAPON AT THE TARGETED/ADDRESSEE TN. IF THE TARGETED TN IS SET TO NO STATEMENT, THE ADDRESSEE TN IS THE OBJECT THAT THE THREAT TN IS

5.3-614

MIL-STD-6016B

FIELD CODING FOR J15.0I (SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
401	001	THREAT POSTURE -----	(CONTINUED)	
		UNKNOWN	4	TARGETED AGAINST. THE POSTURE OF THE KNOWN THREAT IS UNKNOWN AT THE TIME OF THIS TRANSMISSION.
		CANCEL	5	THE THREAT FROM THE THREAT TN TO THE ADDRESSEE/TARGETED TN IS CANCELLED.
		DIRECTED TO ENGAGE	6	THE THREAT LIKELY HAS BEEN ORDERED TO ENGAGE THE TARGETED/ADDRESSEE TN. IF THE TARGETED TN IS SET TO NO STATEMENT, THE ADDRESSEE TN IS THE OBJECT THAT THE THREAT TN IS TARGETED AGAINST.
		UNDEFINED	7	
769	055	TRACK NUMBER, THREAT -----		THE TN OF THE THREAT IDENTIFIED IN THE MESSAGE. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE- BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANNN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED. CODING CHARACTER

FIELD CODING FOR J15.0I (SHEET 3)

DFI DUI DUI/DI NAME DI BIT CODE DUI/DI EXPLANATION

769 055 TRACK NUMBER, THREAT

(CONTINUED)

00000 0
00001 1
00010 2
00011 3
00100 4
00101 5
00110 6
00111 7
01000 A
01001 B
01010 C
01011 D
01100 E
01101 F
01110 G
01111 H
10000 J
10001 K
10010 L
10011 M
10100 N
10101 P
10110 Q
10111 R
11000 S
11001 T
11010 U
11011 V
11100 W
11101 X
11110 Y
11111 Z

00000 0 NO STATEMENT.
00001-00076 1 THROUGH 62 ASSIGNED AS IDENTIFICATION NUMBERS
FOR C2 IUS (JU, PU, FJU, AND FPU).
00077 63 ILLEGAL.
00100-00175 64 THROUGH 125 ASSIGNED AS IDENTIFICATION NUMBERS
FOR C2 IUS (JU, RU, FJU, AND FRU).
00176 126 RESERVED FOR USE AS THE PSEUDO
SOURCE TRACK NUMBER ADDRESS.
00177 127 COLLECTIVE ADDRESS.
00200-07776 128 THROUGH 4094 ASSIGNED AS IDENTIFICATION NUMBERS
FOR JUS AND ALLOCATED IN BLOCKS TO

FIELD CODING FOR J15.0I

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	055	TRACK NUMBER, THREAT -----	(CONTINUED)	
		07777	4095	C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS. ILLEGAL.
		0A000-0Z777	4096 THROUGH 16383	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		10000-17777	16384 THROUGH 20479	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		20000-27777	32768 THROUGH 36863	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND

5.3-617

MIL-STD-6016B

FIELD CODING FOR J15.0I

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	055	TRACK NUMBER, THREAT -----	(CONTINUED)	
		50000-57777	81920 THROUGH 86015	REFERENCE POINTS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		70000-77776	114688 THROUGH 118782	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
386	013	STRENGTH -----		EXPRESSES THE NUMBER OF ENTITIES REPRESENTED BY A SINGLE TRACK.
		NO STATEMENT	0	
		1 UNIT	1	
		2 UNITS	2	
		3 UNITS	3	
		4 UNITS	4	
		5 UNITS	5	
		6 UNITS	6	
		7 UNITS	7	
		8 UNITS	8	
		9 UNITS	9	
		10 UNITS	10	
		11 UNITS	11	
		12 UNITS	12	
		2 THROUGH 7 (FEW) UNITS	13	

5.3-618

MIL-STD-6016B

FIELD CODING FOR J15.0I

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
386	013	STRENGTH -----	(CONTINUED)	
		GREATER THAN 7 (MANY) UNITS	14	
		GREATER THAN 12 UNITS	15	
385	003	EXERCISE INDICATOR -----		INDICATES WHETHER OR NOT THE MESSAGE IDENTIFIES AN EXERCISE TRACK.
		NON-EXERCISE TRACK	0	
		EXERCISE TRACK OR UNIT	1	
1762	002	THREAT TYPE -----		DESCRIBES THE TYPE OF THREAT ABOUT TO BE ENCOUNTERED BY THE FRIENDLY UNIT DESCRIBED IN THE ADDRESSEE TN OR TARGETED TN FIELD.
		NO STATEMENT	0	
		UNKNOWN	1	
		AIR-TO-SURFACE MISSILE	2	
		NUCLEAR, BIOLOGICAL, CHEMICAL	3	
		SURFACE-TO-SURFACE MISSILE	4	
		SURFACE-TO-AIR MISSILE	5	
		AIR-TO-AIR MISSILE	6	
		AIRCRAFT	7	
		ANTI-AIRCRAFT ARTILLERY	8	
		SHIP	9	
		SUBMARINE	10	
		SATELLITE	11	
		REMOTELY PILOTED VEHICLE/UNATTENDED	12	
		AIRBORNE VEHICLE		
		TORPEDO	13	
		ANTI-SHIP CRUISE MISSILE	14	
		UNDEFINED	15	
399	018	THREAT WEAPON -----		INDICATES THE TYPE OF WEAPON THE THREAT INTENDS TO USE AGAINST THE TARGETED TN.
		NO STATEMENT	0	
		HEAT AIR-TO-AIR MISSILE	1	
		RADAR AIR-TO-AIR MISSILE	2	
		ACTIVE AIR-TO-AIR MISSILE	3	A MISSILE NOT REQUIRING CONTINUAL DATA LINK WITH ITS LAUNCHING PLATFORM.

5.3-619

MIL-STD-6016B

FIELD CODING FOR J15.0I (SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
399	018	THREAT WEAPON	(CONTINUED)	

		ANTI-RADIATION MISSILE	4	
		(HARM)		
		UNDEFINED	5 THROUGH 31	

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: THREAT WARNING EXTENSION WORD

[illegible]

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51:	50
:																				:
:	TRACK NUMBER, TARGETED																			: SP
:																				:
:	19																			: 2

WORD DESCRIPTION

WORD NUMBER: J15.0E0
WORD TITLE: THREAT WARNING EXTENSION WORD

REFERENCE DFI/DUI	DATA FIELD DESCRIPTOR	BIT #		RESOLUTION, CODING, ETC
		POSITION	BITS	
1550 001	WORD FORMAT	0-	1 2	10
756 002	SPARE (SP)	2-	3 2	
281 014	LATITUDE, 0.0051 MINUTE	4-	24 21	
756 002	SPARE (SP)	25-	26 2	
282 014	LONGITUDE, 0.0051 MINUTE	27-	48 22	
756 002	SPARE (SP)	49-	50 2	
769 062	TRACK NUMBER, TARGETED	51-	69 19	

FIELD CODING FOR J15.0E0

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
281	014	LATITUDE, 0.0051 MINUTE -----		THE PRECISION IS APPROXIMATELY 31 FEET. IN 90/1,048,575 DEGREE INCREMENTS.
		0 DEGREES	0	
		+90/1,048,575 THROUGH	1 THROUGH 1048575	
		+90 DEGREES NORTH		
		NO STATEMENT	1048576	
		-90 THROUGH	1048577 THROUGH 2097151	
		-90/1,048,575 DEGREES SOUTH		
282	014	LONGITUDE, 0.0051 MINUTE -----		THE PRECISION IS APPROXIMATELY 31 FEET. IN 180/2,097,151 DEGREE INCREMENTS.
		0 DEGREES	0	
		+180/2,097,151 THROUGH	1 THROUGH 2097151	
		+180 DEGREES EAST		
		NO STATEMENT	2097152	
		-180 THROUGH	2097153 THROUGH 4194303	
		-180/2,097,151 DEGREES WEST		
769	062	TRACK NUMBER, TARGETED -----		THE TN OF THE OBJECT, THAT THE THREAT TN IS TARGETED AGAINST. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE- BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANN WHERE A IS AN ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO

FIELD CODING FOR J15.0E0 (SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	062	TRACK NUMBER, TARGETED -----	(CONTINUED)	

THROUGH SEVEN OF THE FIVE BIT
ALPHANUMERIC CHARACTER WITH THE
FIRST TWO LEADING ZEROES DELETED.

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6
00111	7
01000	A
01001	B
01010	C
01011	D
01100	E
01101	F
01110	G
01111	H
10000	J
10001	K
10010	L
10011	M
10100	N
10101	P
10110	Q
10111	R
11000	S
11001	T
11010	U
11011	V
11100	W
11101	X
11110	Y
11111	Z

00000	0	NO STATEMENT.
00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
00077	63	ILLEGAL.
00100-00175	64 THROUGH 125	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).

FIELD CODING FOR J15.0E0

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	062	TRACK NUMBER, TARGETED -----	(CONTINUED)	
		00176	126	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		00177	127	COLLECTIVE ADDRESS.
		00200-07776	128 THROUGH 4094	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		07777	4095	ILLEGAL.
		0A000-0Z777	4096 THROUGH 16383	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		10000-17777	16384 THROUGH 20479	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		20000-27777	32768 THROUGH 36863	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL

5.3-626

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	062	TRACK NUMBER, TARGETED -----	(CONTINUED)	
		4A000-4Z777	69632 THROUGH 81919	INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS. ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		70000-77776	114688 THROUGH 118782	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.

WORD TITLE: THREAT WARNING CONTINUATION WORD

24	23	22	21	20:	19	18	17	16	15	14	13	12	11:	10	09	08	07:	06	05	04	03	02:	01	00:		
<---				:	COURSE									:	SPARE				:	CONTINUATION WORD LABEL				:	WORD	:
				:										:					:					:	FORMAT	:
				:	9									:	4				:	5				:	2	:

49:	48	47	46	45	44:	43	42	41	40	39	38	37	36	35	34	33	32	31:	30	29	28	27	26	25	
<---	:	THREAT FUEL				:	ALTITUDE, 25 FT													:	SPEED				
:	5				:	13													:	11					

	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50	
ENV/CAT				SPACE SPECIFIC TYPE																	
				AIR SPECIFIC TYPE																	
				SURFACE (MARITIME) SPECIFIC TYPE																	
				SUBSURFACE (MARITIME) SPECIFIC TYPE																	
				LAND (GROUND) SPECIFIC TYPE																	
				SPARE																	
	3			12												6					

WORD DESCRIPTION

WORD NUMBER: J15.0C1

WORD TITLE: THREAT WARNING CONTINUATION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	01
1551	001	CONTINUATION WORD LABEL	2-	6 5	00001
756	004	SPARE	7-	10 4	
371	015	COURSE	11-	19 9	
367	018	SPEED	20-	30 11	
365	033	ALTITUDE, 25 FT	31-	43 13	
409	004	THREAT FUEL	44-	48 5	
756	006	SPARE	49-	54 6	
749	002	SPACE SPECIFIC TYPE	55-	66 12	
804	001	AIR SPECIFIC TYPE	55-	66 12	
808	001	SURFACE (MARITIME) SPECIFIC TYPE	55-	66 12	
809	001	SUBSURFACE (MARITIME) SPECIFIC TYPE	55-	66 12	
810	001	LAND (GROUND) SPECIFIC TYPE	55-	66 12	
756	012	SPARE	55-	66 12	
275	004	ENVIRONMENT/CATEGORY (ENV/CAT)	67-	69 3	

FIELD CODING FOR J15.0C1

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
371	015	COURSE ----- 0 THROUGH 359 DEGREES ILLEGAL NO STATEMENT	0 THROUGH 359 360 THROUGH 510 511	INDICATES THE DIRECTION OF TRAVEL OF AN OBJECT IN DEGREES WITH RESPECT TO TRUE NORTH. IN 1 DEGREE INCREMENTS.
367	018	SPEED ----- 0 THROUGH 4092 DATA MILES PER HOUR NO STATEMENT	0 THROUGH 2046 2047	THE RATE OF CHANGE OF POSITION. EXPRESSES GROUND SPEED IN 2 DATA MILES PER HOUR INCREMENTS.
365	033	ALTITUDE, 25 FT ----- 0 THROUGH 204,750 FEET ALTITUDE UNKNOWN	0 THROUGH 8190 8191	EXPRESSES ALTITUDE AS MEASURED OUT- WARD FROM THE EARTH AS A POSITIVE QUANTITY ABOVE MEAN SEA LEVEL (MSL) IN FEET. IN 25 FEET INCREMENTS.
409	004	THREAT FUEL ----- NO STATEMENT .1 THROUGH 3 HOURS OF FUEL REMAINING GREATER THAN 3 HOURS OF FUEL REMAINING	0 1 THROUGH 30 31	THE CURRENT KNOWN AMOUNT OF FUEL REMAINING IN THE THREAT. FUEL REMAINING IN .1 HOUR INCREMENTS.
749	002	SPACE SPECIFIC TYPE ----- NO STATEMENT FROG-7 HONEST JOHN SAKR 80 SS-21 MOD 2 SS-21 MOD 3 HAFT-I UNDEFINED SHORT RANGE (0-65 DM) ALACRAN CHENG FENG CONDOR HAFT II IRAN-130	0 1 2 3 4 5 6 7 THROUGH 78 79 80 81 82 83 84	THE SPECIFIC TYPE OF A POINT OR TRACK WITH AN ENVIRONMENT/CATEGORY OF SPACE.

5.3-630

MIL-STD-6016B

FIELD CODING FOR J15.0C1 (SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
749	002	SPACE SPECIFIC TYPE -----	(CONTINUED)	
		LANCE	85	
		MB/EE-150	86	
		MB/EE-300	87	
		UNDEFINED	88	
		PRITHVI	89	
		SS-1B (SCUD-A)	90	
		SS-1C (SCUD-B)	91	
		SS-21 (SCARAB)	92	
		SS-300	93	
		B-610/CJS-98 (BG510)	94	
		NHK-I	95	
		NHK-II (HYON MU)	96	
		UNDEFINED	97 THROUGH 168	
		SHORT-MEDIUM RANGE (66-200 DM)	169	
		AL-HUSAYN	170	
		UNDEFINED	171	
		HAFT III	172	
		M-9	173	
		M-11	174	
		MB/EE-600	175	
		SCUD-C	176	
		SS-23 (SPIDER)	177	
		AL HUSSEIN	178	
		UNDEFINED	179 THROUGH 242	
		MEDIUM RANGE (201-400 DM)	243	
		AL-ABBAS	244	
		JERICO-I	245	
		AL HIJARAN	246	
		SONDA IV	247	
		UNDEFINED	248 THROUGH 330	
		MEDIUM-EXTENDED RANGE (401-600 DM)	331	
		AL-FATAH	332	
		BADR-2000	333	
		CONDOR II	334	
		CSS-1	335	
		MB/EE-1000	336	
		SKY HORSE	337	
		SS-12A (SCALEBOARD A)	338	
		SS-12B (SCALEBOARD B)	339	
		SS1000	340	

5.3-631

MIL-STD-6016B

FIELD CODING FOR J15.0C1 (SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
749	002	SPACE SPECIFIC TYPE	(CONTINUED)	

		TIEN MA	341	
		UNDEFINED	342	THROUGH 416
		EXTENDED RANGE (601-800 DM)	417	
		ARNISTON	418	
		CAPRICORNIO	419	
		JERICO II	420	
		NODONG-1	421	
		SS-N-5 (SERB)	422	
		UNDEFINED	423	THROUGH 496
		EXTENDED-LONG RANGE (801-1000 DM)	497	
		AGNI	498	
		AL/ABED	499	
		CC-4 (SANDAL)	500	
		CSS-5	501	
		UNDEFINED	502	THROUGH 575
		LONG RANGE (1001-1350 DM)	576	
		CHEVALINE	577	
		CSS-2	578	
		CSS-3	579	
		CSS-4	580	
		CSS-N-3	581	
		M-4 SLBM	582	
		M-5 SLBM	583	
		M-20 SLBM	584	
		MIDGETMAN	585	
		MINUTEMAN I	586	
		MINUTEMAN II	587	
		PEACEKEEPER	588	
		POLARIS A-3	589	
		POSEIDON C-3	590	
		SS-11 (SEGO)	591	
		SS-13 (SAVAGE)	592	
		SS-17 (SPANKER) MOD 1	593	
		SS-17 (SPANKER) MOD 2	594	
		SS-17 (SPANKER) MOD 3	595	
		SS-18 (SATAN) MOD 1	596	
		SS-18 (SATAN) MOD 2	597	
		SS-18 (SATAN) MOD 3	598	
		SS-20 (SABER)	599	
		SS-24 (SCALPEL)	600	

FIELD CODING FOR J15.0C1

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
749	002	SPACE SPECIFIC TYPE	(CONTINUED)	

		SS-25 (SICKLE)	601	
		SS-N-6 (SAWFLY)	602	
		SS-N-8	603	
		SS-N-17 (SNIPE)	604	
		SS-N-18 (STINGRAY)	605	
		SS-N-20 (STURGEON)	606	
		SS-N-23 (SKIFF)	607	
		SSBS S-3	608	
		SSBS S-4	609	
		TRIDENT I (C-4)	610	
		TRIDENT II (D-5)	611	
		MODIFIED CSS-5	612	
		SS-19 MOD 3	613	
		UNDEFINED	614	
		NEW SOLID SLBM	615	
		CSS-NX-3	616	
		M4B	617	
		M45	618	
		UNDEFINED	619 THROUGH 786	
		>1350 DM	787	
		ABM-1B (GALOSH)	788	
		ARROW	789	
		ASTER	790	
		CORPS SAM	791	
		ERINT	792	
		HAWK	793	
		PATRIOT	794	
		SA-10 (GRUMBLE)	795	
		SA-12A (GLADIATOR)	796	
		SA-12B (GIANT)	797	
		SA-N-6 (GRUMBLE)	798	
		SH-08 (GAZELLE)	799	
		STANDARD MISSILE BLOCK	800	
		IVA		
		THAAD	801	
		SM-2 BLOCK IV	802	
		SM-3 LEAP	803	
		UNDEFINED	804 THROUGH 876	
		INTERCEPTOR	877	
		OPERATIONAL COMMANDER	878 THROUGH 941	
		DEFINED 1-64		
		UNDEFINED	942 THROUGH 1022	

5.3-633

MIL-STD-6016B

FIELD CODING FOR J15.0C1 (SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
749	002	SPACE SPECIFIC TYPE -----	(CONTINUED)	
		BALLISTIC MISSILE	1023	
		GENERAL		
		UNDEFINED	1024 THROUGH 2046	
		SPACE GENERAL	2047	
		UNDEFINED	2048 THROUGH 4093	
		RESET TO NO STATEMENT	4094	
		UNDEFINED	4095	
804	001	AIR SPECIFIC TYPE -----		THE SPECIFIC TYPE OF POINT OR TRACK WITH AN ENVIRONMENT/CATEGORY OF AIR.
		NO STATEMENT	0	
		----- FIGHTER -----		
		F-4 PHANTOM II	1	
		F-5 TIGER II	2	
		F-8 CRUSADER	3	
		F-14 TOMCAT	4	
		F-15 EAGLE	5	
		F-16 FIGHTING FALCON	6	
		F-101 VOODOO	7	
		F-104 STARFIGHTER	8	
		F-105 THUNDERCHIEF	9	
		F-106 DELTA DART	10	
		F-111 (GENERAL DYNAMICS)	11	
		F/A-18 HORNET	12	
		EFA	13	
		F-102	14	
		F-100	15	
		DISUSED	16	
		DISUSED	17	
		COMMANDO	18	
		DISUSED	19	
		DISUSED	20	
		J-35 DRAKEN	21	
		JAGUAR	22	
		SUPER ETENDARD	23	
		DISUSED	24 THROUGH 26	
		F-1 (MITSUBISHI)	27	
		F-35XD DRAKEN	28	

FIELD CODING FOR J15.0C1

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		DISUSED	29	
		HF-24 MARUT (WIND SPIRIT)	30	
		JA37 VIGGEN	31	
		DISUSED	32	
		SF-5 FREEDOM FIGHTER	33	
		IAR-91 ORAO	34	
		AJEET INVINCIBLE	35	
		KFIR C2	36	
		MIRAGE F1	37	
		MIRAGE 3	38	
		MIRAGE 5	39	
		MIRAGE 50	40	
		MIRAGE 2000	41	
		DISUSED	42	
		DISUSED	43	
		ALPHA JET	44	
		KEFIR	45	
		F-6 FARMER	46	
		F-8 FISHBED	47	
		F-9 FANTAN	48	
		F-12 (CHINA)	49	
		SU-7 FITTER	50	
		SU-9 FISHPOT	51	
		SU-11 FLAGON	52	
		SU-15 FLAGON	53	
		SU-17 FITTER	54	
		SU-19 FENCER	55	
		SU-20 FITTER	56	
		SU-22 FITTER	57	
		SU-24 FENCER	58	
		SU-25 FROGFOOT	59	
		TU-28 FIDDLER	60	
		TU-128 FIDDLER	61	
		MIG-21 FISHBED	62	
		MIG-23 FLOGGER	63	
		MIG-25 FOXBAT	64	
		MIG-27 FLOGGER	65	
		YAK-28 FIREBAR	66	
		YAK-36 FORGER	67	
		AAF "RAM-J"	68	
		MIG-15 FAGOT	69	
		MIG-17 FRESCO	70	

5.3-635

MIL-STD-6016B

FIELD CODING FOR J15.0C1

(SHEET 7)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		MIG-19 FARMER	71	
		SU-27 FLANKER	72	
		MIG-29 FULCRUM	73	
		MIG-31 FOXHOUND	74	
		YAK-38 FORGER-A	75	
		F-22 RAPTOR	76	
		F-84 THUNDERSTREAK	77	
		F-86 SABRE	78	
		F/A2 SEA HARRIER	79	
		IDF CHING-KUO (TAIWAN)	80	
		JAS-39 GRIPPEN	81	
		JIAN JI-7	82	
		JIAN JI-8-2	83	
		JOINT STRIKE FIGHTER	84	
		KFIR C7	85	
		KFIR 2000	86	
		RAFALE	87	
		SU-30	88	
		SU-33 (SU-27K)	89	
		SU-34	90	
		SU-35	91	
		SU-37	92	
		SU-39	93	
		YAK-141 FREESTYLE	94	
		F-5 FRESCO	95	
		F-7 FISHBED	96	
		J-9	97	
		RT33	98	
		CF-188 HORNET	99	
		UNDEFINED	100	
		TORNADO F3	101	
		SEA HARRIER	102	
		F-5 NORTHROP	103	
		UNDEFINED	104 THROUGH 254	
		FIGHTER GENERAL	255	

		BOMBERS/ATTACK		

		A-4 SKYHAWK	256	
		A-6 INTRUDER	257	
		A-7 CORSAIR II	258	

5.3-636

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		A-10 THUNDERBOLT II	259	
		A-37 DRAGONFLY	260	
		B-1 (ROCKWELL)	261	
		B-52 STRATOFORTRESS	262	
		AC-130 HERCULES	263	
		AV-8 HARRIER	264	
		F/A-18 HORNET	265	
		FB-111 (GENERAL DYNAMICS)	266	
		A-1	267	
		TA-28	268	
		DISUSED	269	
		AC-47	270	
		AC-119	271	
		AC-124	272	
		ALPHA JET	273	
		DISUSED	274 THROUGH 276	
		35XD DRAGEN	277	
		J-1 HAWK	278	
		J-1 JAESTREB	279	
		S-2	280	
		AJ37 VIGGEN	281	
		HA220 SUPER SAETA	282	
		M.B.326 (AERMACCHI)	283	
		M.B.339 (AERMACCHI)	284	
		SF 260 WARRIER	285	
		SK 60 (SAAB)	286	
		BAC 167 STRIKEMASTER	287	
		TORNADO GR-1 (IDS)	288	
		IL-28 BEAGLE	289	
		MI-4 BISON	290	
		TU-16 BADGER	291	
		TU-22 BLINDER	292	
		TU-22M BACKFIRE	293	
		TU-95 BEAR	294	
		TU-142 BEAR	295	
		YAK-28 BREWER	296	
		SUPER ENTENDARD	297	
		TU-160 BLACKJACK	298	
		AMX	299	
		FRS1 SEA HARRIER	300	
		FRS2 SEA HARRIER	301	
		FRS51 SEA HARRIER	302	

FIELD CODING FOR J15.0C1 (SHEET 9)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		F-117 NIGHTHAWK	303	
		G4 SUPER GALEB	304	
		G91Y	305	
		HAWK-2000	306	
		HAWK-100	307	
		HAWK-200	308	
		HAWK-50	309	
		HAWK-60	310	
		IA-58 PUCARA	311	
		IAR-93 ORAO	312	
		IAR-99 SOIM	313	
		JIAN JI-5M	314	
		A-5 FANTAN	315	
		L59 ALBATROS	316	
		B-2 SPIRIT	317	
		B-7 HONGZHA	318	
		1050E	319	
		A3 LEI MING	320	
		HARRIER GR4/7	321	
		TORNADO GR4	322	
		AV-8B HARRIER PLUS	323	
		CF-188 HORNET	324	
		RAFALE	325	
		UNDEFINED	326 THROUGH 510	
		BOMBER/ATTACK GENERAL	511	

		PATROL/RECON/ELECTRONIC/ TANKER/GENERAL		

		E-2 HAWKEYE	512	
		E-3 SENTRY (AWACS)	513	
		E-4 NEACP	514	
		EA-3	515	
		EA-6 PROWLER	516	
		EB-57 (DOUGLAS)	517	
		EC-130 HERCULES	518	
		EC-135 (BOEING)	519	
		EF-4 WILD WEASEL	520	
		EF-111 (GENERAL DYNAMICS)	521	
		EP-3 ORION	522	

5.3-638

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		KA-3 (DOUGLAS)	523	
		KA-6 (GRUMMAN)	524	
		KC-10 EXTENDER	525	
		KC-130 HERCULES	526	
		KC-135 STRATOTANKER	527	
		O-1 BIRD DOG	528	
		O-2 (CESSNA)	529	
		OV-1 MOHAWK	530	
		OV-10 BRONCO	531	
		P-2 NEPTUNE	532	
		P-3 ORION	533	
		RC-130 HERCULES	534	
		RC-135 (BOEING)	535	
		RF-4 PHANTOM II	536	
		RF-5 (NORTHROP)	537	
		RF-8 CRUSADER	538	
		RF-14 TOMCAT	539	
		RF-104 STARFIGHTER	540	
		RP-3 ORION	541	
		RU-21 UTE	542	
		S-2 TRACKER	543	
		S-3 VIKING	544	
		SR-71 BLACKBIRD	545	
		U-2 (LOCKHEED)	546	
		U-4 AERO COMMANDER	547	
		U-5 H-500 TWIN	548	
		U-8 SEMINOLE	549	
		U-10 COURIER	550	
		UC-12 HURON	551	
		U-21 UTE	552	
		US-3 VIKING	553	
		OA-37 DRAGONFLY	554	
		TR-1	555	
		WC-130 HERCULES	556	
		E-1 TRACER	557	
		EB-66	558	
		EC-121	559	
		RA-3	560	
		SEA SCAN	561	
		FALCON 20 GUARDIAN	562	
		BR 1150 ATL1	563	
		RF-35XD DRAKEN	564	
		BN-2 MARITIME DEFENDER	565	

FIELD CODING FOR J15.0C1 (SHEET 11)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		DISUSED	566 THROUGH 567	
		CP-140 AURORA	568	
		HS.748 COASTGUARDER	569	
		HS.801 NIMROD	570	
		DISUSED	571	
		MK.3	572	
		RJ-1 HAWK	573	
		RJ-1 JAESTREB	574	
		SS-2	575	
		PEACE SENTINEL	576	
		KC-97	577	
		AU-24	578	
		AU-23	579	
		U-21	580	
		U-17	581	
		HU-16	582	
		U-9	583	
		U-3	584	
		RU-21	585	
		NKC-135	586	
		RF-101	587	
		RF-111	588	
		RB-57	589	
		RB-66	590	
		RC-121	591	
		BE-12 MAIL	592	
		IL-38 MAY	593	
		TU-126 MOSS	594	
		BE-6	595	
		VC-10 (TANKER)	596	
		AN-12 CUB-A (ELINT)	597	
		AN-12 CUB-C (EA)	598	
		AN-12 CUB-D (EA)	599	
		IL-20 COOT-A (ELINT)	600	
		IL-76 MAINSTAY	601	
		E-8 (J STARS)	602	
		TORNADO ECR	603	
		E-6 MERCURY	604	
		EMB-111	605	
		MU-2S	606	
		A40 ALBATROS	607	
		BE42 ALBATROS	608	
		CL215 AMPHIBIAN	609	

FIELD CODING FOR J15.0C1

(SHEET 12)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		IAI 1125	610	
		IL22 C00T B	611	
		J32 LANSEN	612	
		SH5 HARBIN	613	
		TIER1	614	
		TIER2	615	
		TIER3	616	
		US1 (SHIN)	617	
		C-212 CASA	618	
		CESSNA 550 CITATION II	619	
		CESSNA 560 CITATION V	620	
		CL 215 CANADAIR	621	
		DORNIER 27	622	
		F-27 FOKKER	623	
		NIMROD MRA4	624	
		CP-140A AURORA/ARCTURUS	625	
		RC-135 RIVET JOINT	626	
		ATL 2	627	
		ETENDARD IV P	628	
		ALIZE	629	
		FALCON 50	630	
		MIRAGE IV	631	
		MIRAGE 2000	632	
		BR 1150 GE ATL ASW	633	
		BR 1150 GE ATL SIGINT	634	
		C-130 HERCULES TANKER	635	
		ASTOR	636	
		UNDEFINED	637 THROUGH 761	
		TANKER	762	
		RECONNAISSANCE (RECON)	763	
		ELECTRONIC WARFARE (EW)	764	
		ASW	765	
		AEW AND C	766	
		MISCELLANEOUS GENERAL	767	

		TRAINER		

		T-2 BUCKEYE	768	
		T-28 TROJAN	769	
		T-29 (CONVAIR)	770	
		T-34 MENTOR	771	

5.3-641

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	
		T-37 TWEET	772	
		T-38 TALON	773	
		T-39 SABERLINER	774	
		T-41 MESCALERO	775	
		T-42 CONCHISE	776	
		T-43 (BOEING)	777	
		T-44 KING AIR	778	
		TA-4 SKYHAWK	779	
		TA-7 CORSAIR II	780	
		T-33	781	
		ALPHA JET	782	
		B3LA (SAAB)	783	
		C-101 AVIOJET	784	
		G2-A GALEB	785	
		G2-A SEAGULL	786	
		L-29 DELFIN	787	
		L-29 MAYA	788	
		L-39 ALBATROS	789	
		L-70 MILTRAINER	790	
		L-450	791	
		P.55 (PARTENAVIA)	792	
		T-2 (MITSUBISHI)	793	
		CM 170 MAGISTER	794	
		M.B.339 (AERMACCHI)	795	
		T-2 (MITSUBISHI)	796	
		CM AU/ MAGISTER	797	
		M.B.339 (AERMACCHI)	798	
		SF-260 (SIAI-MARCHETTI)	799	
		SH 37 VIGGEN	800	
		QH-50 DRAKEN	801	
		SK 37 VIGGEN	802	
		SK 60 (SAAB)	803	
		TB30 EPSILON	804	
		TF-35XD	805	
		TJ-1 HAWK	806	
		TJ-1 JASTRAEB	807	
		TS.11 SPARK	808	
		AW1-2 FAN TRAINER	809	
		DISUSED	810	
		HJT-16 KIRAN	811	
		MBB223 FLAMINGO	812	
		SU-11 MAIDEN	813	
		SU-15	814	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		MIG-15 MIDGET	815	
		MIG-17	816	
		MIG-21 MONGOL	817	
		MIG-23	818	
		MIG-25	819	
		YAK-11 MOOSE	820	
		YAK-18 MAX	821	
		YAK-28 MAESTRO	822	
		TF-104 STARFIGHTER	823	
		T-46A	824	
		EMB-312 TOUCAN	825	
		T-45 GOSHAWK	826	
		T-47	827	
		AS202	828	
		CT114 TUTOR	829	
		G91T (FIAT JET 1)	830	
		K8 (NAMC)	831	
		L70 VINKA	832	
		STRIKEMASTER (BAE)	833	
		T1 JAYHAWK	834	
		T4 (KAWASAKI)	835	
		CT-142 DASH 8	836	
		B-55 BARON	837	
		F-33 BONANZA	838	
		839 PILLAN-TAMIZ	839	
		CT-133 SILVERSTAR	840	
		UNDEFINED	841 THROUGH 1022	
		TRAINER GENERAL	1023	

		TRANSPORT/AIRLINER		

		C-1 (GRUMMAN COD)	1024	
		C-2 GREYHOUND	1025	
		C-5 GALAXY	1026	
		C-7 CARIBOU	1027	
		C-9 NIGHTINGALE	1028	
		C-12 HURON	1029	
		C-123 PROVIDER	1030	
		C-130 HERCULES	1031	
		C-135 STRATOLIFTER	1032	
		C-140 JETSTAR	1033	

5.3-643

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		C-141 STARLIFTER	1034	
		HC-130 HERCULES	1035	
		VC-6 KING AIR	1036	
		VC-9 SKYTRAIN II	1037	
		VC-11 GULFSTREAM	1038	
		VC-137 (BOEING)	1039	
		707 (BOEING)	1040	
		720 (BOEING)	1041	
		727 (BOEING)	1042	
		737 (BOEING)	1043	
		747 (BOEING)	1044	
		757 (BOEING)	1045	
		767 (BOEING)	1046	
		L-100 HERCULES	1047	
		L-1011 TRI STAR	1048	
		DC-8 (DOUGLAS)	1049	
		DC-9 (DOUGLAS)	1050	
		DC-10 (DOUGLAS)	1051	
		C-119	1052	
		DC-130	1053	
		HC-97	1054	
		C-JM	1055	
		C-54	1056	
		C-97	1057	
		C-118	1058	
		C-119	1059	
		C-121	1060	
		C-124	1061	
		C-131	1062	
		C-133	1063	
		VC-47	1064	
		CV-54	1065	
		CV-140	1066	
		ARAVA	1067	
		CONCORDE	1068	
		ISLANDER	1069	
		SKYVAN	1070	
		TRIDENT	1071	
		A300 AIRBUS	1072	
		A310 AIRBUS	1073	
		C-1 (KAWASKI)	1074	
		C-160 TRANSALL	1075	
		C.207 AZOR	1076	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		C-212 AVIOCAR	1077	
		F27 FRIENDSHIPS	1078	
		F28 FELLOWSHIP	1079	
		G222 SAMA	1080	
		AW.660 ARGOSY	1081	
		BAC111 ONE-ELEVEN	1082	
		DHC-5 BUFFALO	1083	
		DHC-7 DASH	1084	
		AN-2 COLT	1085	
		AN-10 CAT	1086	
		AN-12 CUB	1087	
		AN-14 CLOD	1088	
		AN-22 COCK	1089	
		AN-24 COKE	1090	
		AN-26 CURL	1091	
		AN-28 CASK	1092	
		AN-30 CLANK	1093	
		AN-32 CLINE	1094	
		AN-40 (VERY LARGE TURBO-PROP)	1095	
		AN-72 COALER	1096	
		IL-12 COACH	1097	
		IL-18 COOT	1098	
		IL-62 CLASSIC	1099	
		IL-76 CANDID	1100	
		IL-86 CAMBER	1101	
		TU-114 CLEAT	1102	
		TU-134 CRUSTY	1103	
		TU-144 CHARGER	1104	
		TU-154 CARELESS	1105	
		YAK-40 CODDLING	1106	
		YAK-42 CLOBBER	1107	
		TU-104	1108	
		YAK-27	1109	
		IL-38	1110	
		DISUSED	1111	
		DO-228 LT (TRANSPORT)	1112	
		DISUSED	1113	
		AN-74	1114	
		AN-124 CONDOR	1115	
		A320 AIRBUS	1116	
		A321 AIRBUS	1117	
		A330 AIRBUS	1118	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		A340 AIRBUS	1119	
		AN-70	1120	
		AN-225 COSSACK	1121	
		BAE-125-600	1122	
		BAE146	1123	
		777 (BOEING)	1124	
		C-17 GLOBEMASTER III	1125	
		C-20 GULFSTREAM 3/4	1126	
		C-21 LEARJET 35	1127	
		C-22	1128	
		C-23 SHERPA/SHORTS 330	1129	
		C-26 METRO 3	1130	
		YS 11 (NAMC)	1131	
		CL-600 CHALLENGER	1132	
		CL-601 CHALLENGER	1133	
		CN-235M (AIRTECH)	1134	
		EMB-120 BRASILLIA ADV	1135	
		EMB-145 AMAZON	1136	
		IL-78 MIDAS	1137	
		MD-11	1138	
		MD-80	1139	
		MD-90	1140	
		PD-808	1141	
		TU-44	1142	
		V-22 OSPREY	1143	
		VC-25	1144	
		XC-2	1145	
		1124 (IAI)	1146	
		1900 (BEECH)	1147	
		330 (SHORTS)	1148	
		580 (CONVAIR)	1149	
		ATR42	1150	
		B55 BARON	1151	
		BN2 ISLANDER	1152	
		C46 COMMANDO	1153	
		CARAVELL (SUD)	1154	
		CC109 (CANADAIR)	1155	
		CHALLENGER (CANADAIR)	1156	
		DHC2	1157	
		DHC6 TWIN OTTER	1158	
		DHC8	1159	
		EMB110 BANDEIRANTE	1160	
		EMB121	1161	

FIELD CODING FOR J15.0C1

(SHEET 18)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		FALCON 200/FALCON 20	1162	
		FALCON 50	1163	
		FALCON 900	1164	
		FH227 FRIENDSHIP	1165	
		FOKKER 100	1166	
		FOKKER 50	1167	
		FOKKER 60	1168	
		FOKKER 70	1169	
		GROB G850	1170	
		GULFSTREAM 1	1171	
		GULFSTREAM 2	1172	
		JETSTREAM	1173	
		JETSTREAM 31	1174	
		KING AIR	1175	
		L410 TURBOJET	1176	
		LEARJET 23	1177	
		LEARJET 24	1178	
		LEARJET 25 (IMPROVED VER	1179	
		28)		
		LEARJET 35/36	1180	
		LEARJET 55 (IMPROVED VER	1181	
		28)		
		LEARJET 60	1182	
		MERLIN 2	1183	
		MERLIN 3	1184	
		MERLIN 4	1185	
		METRO 3	1186	
		SAAB 2000	1187	
		SAAB 340	1188	
		SABRELINER	1189	
		U6 BEAVER	1190	
		VISCOUNT	1191	
		W3 SOKOL	1192	
		Y11 (HAMC)	1193	
		Y12 (HAMC)	1194	
		Y5	1195	
		CC-115 BUFFALO	1196	
		CC-130 HERCULES	1197	
		CC-150 POLARIS	1198	
		C-235 CASA	1199	
		CC-138 TWIN OTTER	1200	
		DO-228 LM (POLLUTION	1201	
		CONTROL)		

5.3-647

MIL-STD-6016B

FIELD CODING FOR J15.0C1 (SHEET 19)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		UNDEFINED	1202 THROUGH 1277	
		LIGHT CIVIL	1278	
		TRANSPORT/AIRLINER	1279	
		GENERAL		

		HELICOPTERS		

		AH-1 COBRA	1280	
		AH-64 APACHE	1281	
		CH-3 (SIKORSKY)	1282	
		CH-46 (SEA KNIGHT)	1283	
		CH-47 CHINOOK	1284	
		CH-53 SEA STALLION	1285	
		CH-54 LARKE (SKYCRANE)	1286	
		EH-60 QUICK FOX	1287	
		HH-1 IROQUOIS	1288	
		HH-2 SEA SPRITE	1289	
		HH-3 JOLLY GREEN	1290	
		HH-52 (SIKORSKY)	1291	
		HH-53 (SIKORSKY)	1292	
		OH-6 (HUGHES)	1293	
		OH-58 KIOWA	1294	
		RH-3 SEA KING	1295	
		RH-53 (SIKORSKY)	1296	
		SH-2 SEA SPRITE	1297	
		SH-3 SEA KING	1298	
		SH-60 SEA HAWK	1299	
		UH-1 IROQUOIS	1300	
		UH-2 SEA SPRITE	1301	
		UH-12 (HILLER)	1302	
		UH-46 (BOEING)	1303	
		UH-60 BLACK HAWK	1304	
		CH-2U	1305	
		HH-43	1306	
		A109 (AGUSTA)	1307	
		A129 MONGOOSE	1308	
		B0-105 (MBB)	1309	
		DISUSED	1310	
		CH-124 SEA KING	1311	
		DISUSED	1312 THROUGH 1314	
		SA 315 LAMA	1315	

FIELD CODING FOR J15.0C1

(SHEET 20)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	
		DISUSED	1316	
		DISUSED	1317	
		SA 321 SUPER FRELON	1318	
		SA 330 PUMA	1319	
		SA 332 SUPER PUMA	1320	
		S 342 GAZELLE	1321	
		SA 350 ASTAR	1322	
		SA 360 DAUPHIN	1323	
		SA 361 DAUPHIN	1324	
		WG-13 LYNX	1325	
		WG-34 (WESTLAND)	1326	
		KA-18 HOG	1327	
		KA-20 HARP	1328	
		KA-25 HORMONE	1329	
		KA-26 HOODLUM	1330	
		MI-1 HARE	1331	
		MI-2 HOPLITE	1332	
		MI-4 HOUND	1333	
		MI-6 HOOK	1334	
		MI-8 HIP	1335	
		MI-10 HARKE	1336	
		MI-12 HOMER	1337	
		MI-14 HAZE	1338	
		MI-24 HIND	1339	
		MI-26 HALO	1340	
		CH-53E SUPER STALLION	1341	
		MH-53E SEA DRAGON	1342	
		HH-60 NIGHT HAWK	1343	
		HH-65A DOLPHIN	1344	
		KA-27 HELIX-A (ASW)	1345	
		KA-32 HELIX	1346	
		MI-17 HIP-H	1347	
		MI-28 HAVOC	1348	
		ECUREUIL/FENNEL/ESQILO	1349	
		KA-29 HELIX-B	1350	
		KA-50 HOKUM	1351	
		204 BELL	1352	
		205 BELL	1353	
		206 BELL	1354	
		214 BELL	1355	
		280 ENSTROM	1356	
		300 SCHWEIZER	1357	
		406 COMBAT SCOUT	1358	

FIELD CODING FOR J15.0C1 (SHEET 21)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		A 109 HIRUNDO	1359	
		A 129 MANGUSTA	1360	
		AH 6 CAYUSE	1361	
		ALOUETTE 2	1362	
		ALOUETTE 3	1363	
		AS 350 ECUREUIL	1364	
		AS 532 COUGAR	1365	
		AS 550 FENNEC	1366	
		AS 555 FENNEC	1367	
		AS 565 PANTHER	1368	
		CH 34 WESTLAND	1369	
		EH 101	1370	
		HAS 1 WASP	1371	
		KA-28 HELIX A	1372	
		MD 500 DEFENDER	1373	
		MI 22	1374	
		MI 25	1375	
		MI 35	1376	
		MI 9	1377	
		SA 341 GAZELLE	1378	
		SA 342 GAZELLE	1379	
		SA 365 DAUPHIN 2	1380	
		TS11 ISKRA	1381	
		WESSEX	1382	
		Z9 (HARBIN)	1383	
		CH-146 GRIFFON	1384	
		SEA KING AEW (SKW)	1385	
		EH 101 MERLIN	1386	
		AB-212 AUGUSTA BELL	1387	
		BO-105 BOLKOW	1388	
		CH-47 CHINOOK	1389	
		HUGHES 500	1390	
		HUGHES 3000	1391	
		SH-3D SIKORSKY	1392	
		SH-70L SIKORSKY	1393	
		CH-113 LABRADOR	1394	
		NH 90 (C2)	1395	
		NH 90 (RECCE)	1396	
		NH 90 (EW/SEAD)	1397	
		NH 90 (TRANSPORT)	1398	
		SEA LYNX MK88A	1399	
		SEA KING MK41 (KWS)	1400	
		TIGER (HAP)	1401	

FIELD CODING FOR J15.0C1 (SHEET 22)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		NH 90 (NAVY)	1402	
		TIGER (HAC)	1403	
		SA 341 GAZELLE CANON	1404	
		AS 532 COUGAR HORIZON	1405	
		AW-520 SAR CORMORANT	1406	
		UNDEFINED	1407 THROUGH 1534	
		HELICOPTER GENERAL	1535	

		AIR-AIR MISSILES		

		AIM-4A FALCON	1536	
		AIM-7 SPARROW	1537	
		AIM-9 SIDEWINDER	1538	
		AIM-54 PHOENIX	1539	
		AIM-2A GENIE	1540	
		AIM-120 AMRAAM	1541	
		ASLAM	1542	
		R.530	1543	
		R.550 MAGIC	1544	
		S.530 SUPER 530	1545	
		ASPID	1546	
		DISUSED	1547	
		SHAFRIR	1548	
		SKY FLASH	1549	
		DISUSED	1550	
		AA-2 ATOLL	1551	
		AA-3 ANAB	1552	
		AA-5 ASH	1553	
		AA-6 ACRID	1554	
		AA-7 APEX	1555	
		AA-8 APHID	1556	
		AAM	1557	
		AA-9 AMOS	1558	
		AA-XP-1/2	1559	
		AQM-34	1560	
		AQM-91	1561	
		BGM-34 FIREBEE/MQM34	1562	
		YQM-94	1563	
		YQM-98	1564	
		AIM-132 ASRAAM	1565	
		MICA	1566	

5.3-651

MIL-STD-6016B

FIELD CODING FOR J15.0C1

(SHEET 23)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		PL-2A	1567	
		PL-5B	1568	
		PL-7	1569	
		PL-9	1570	
		PYTHON 3	1571	
		PYTHON 4	1572	
		AA-10 ALAMO	1573	
		AA-11 ARCHER	1574	
		AA-12 ADDER	1575	
		AA-1 ALKALI	1576	
		AAM-1	1577	
		UNDEFINED	1578 THROUGH 1790	
		AIR-TO-AIR MISSILE	1791	
		GENERAL		

		AIR-GROUND/GROUND-		
		GROUND MISSILES		

		AGM-45 SHRIKE	1792	
		AGM-65 MAVERICK	1793	
		AGM-69 SRAM	1794	
		AGM-78 STANDARD ARM	1795	
		AGM-84 HARPOON	1796	
		AGM-86 ALCM	1797	
		AGM-88 HARM	1798	
		AGM-109 TOMAHAWK	1799	
		AM 39 EXOCET	1800	
		AGM-119 PENGUIN	1801	
		AS 11 KILTER	1802	
		AS 12 KEGLER	1803	
		AS 15 KENT	1804	
		AS 30	1805	
		DISUSED	1806	
		RB 05	1807	
		RB 08	1808	
		ADVANCED ASM	1809	
		AS-1 KENNEL	1810	
		AS-2 KIPPER	1811	
		AS-3 KANGAROO	1812	
		AS-4 KITCHEN	1813	
		AS-5 KELT	1814	

5.3-652

MIL-STD-6016B

FIELD CODING FOR J15.0C1 (SHEET 24)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		AS-6 KINGFISH	1815	
		AS-7 KERRY	1816	
		DISUSED	1817	
		AS-10 KAREN	1818	
		AS-9 KYLE	1819	
		AS 34 KORMORAN	1820	
		ASM GABRIEL	1821	
		ASM SEA SKUA	1822	
		ASM SEA EAGLE	1823	
		ASMP	1824	
		AT-2 SWATTER	1825	
		AT-3 SAGGER	1826	
		AT-6 SPIRAL	1827	
		C-601	1828	
		C-611	1829	
		C-801	1830	
		C-802	1831	
		CSS-2	1832	
		CSS-3	1833	
		CSS-N-3	1834	
		CSS-X-4	1835	
		FL-2 SILKWORM	1836	
		FL-7	1837	
		HY-2	1838	
		HY-3	1839	
		M-9/11	1840	
		WS-1	1841	
		AS-13 KINGBOLT	1842	
		AS-14 KEDGE	1843	
		AS-16 KICKBACK	1844	
		AS-17 KRYPTON	1845	
		AS-18 KAZOO	1846	
		AT-4 SPIGOT	1847	
		AT-5 SPANDREL	1848	
		AT-7 SAXHORN	1849	
		AT-10 STABBER	1850	
		AT-11 SNIPER	1851	
		AT-12	1852	
		AT-13	1853	
		AT-14	1854	
		FROG-7	1855	
		SS-1 SCUD	1856	
		SS-11 SEGO	1857	

5.3-653

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		SS-13 SAVAGE	1858	
		SS-18 SATAN	1859	
		SS-19 STILETTO	1860	
		SS-24 SCALPEL	1861	
		SS-25 SICKLE	1862	
		SS-N-2 STYX	1863	
		SS-N-3 SHADDOCK	1864	
		SS-N-6 SERB	1865	
		SS-N-7 STARBRIGHT	1866	
		SS-N-8 SAWFLY	1867	
		SS-N-9 SIREN	1868	
		SS-N-12 SANDBOX	1869	
		SS-N-18 STINGRAY	1870	
		SS-N-19 SHIPWRECK	1871	
		SS-N-20 STURGEON	1872	
		SS-N-21 SAMPSON	1873	
		SS-N-22 SUNBURN	1874	
		SS-N-23 SKIFF	1875	
		SS-N-26	1876	
		AGNI	1877	
		PRITHVI	1878	
		TOW	1879	
		AGM-114 HELLFIRE	1880	
		MLRS	1881	
		HOT	1882	
		MILAN	1883	
		TRIGAT	1884	
		OTOMAT	1885	
		RBS-15M	1886	
		ARMAT	1887	
		ALARM	1888	
		AGM-12 BULLPUP	1889	
		AGM-62A WALLEYE	1890	
		AGM-123A SKIPPER II	1891	
		APACHE (ASM)	1892	
		AS 8	1893	
		AT-1 SWATTER	1894	
		CAS1	1895	
		KH-41 MOSKIT	1896	
		MARTIN PESCADOR	1897	
		MAS1 CARCARA	1898	
		RB 04E	1899	
		STAR	1900	

FIELD CODING FOR J15.0C1

(SHEET 26)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		SEA INDIGO	1901	
		MM 38	1902	
		MM 40	1903	
		SM 39	1904	
		AS 34 KORMORAN II	1905	
		UNDEFINED	1906	THROUGH 2046
		AIR-GROUND MISSILE	2047	
		GENERAL		

		SURFACE TO AIR MISSILES		

		FIM-92 STINGER	2048	
		NIM-23 HAWK	2049	
		MIM-42 REDEYE	2050	
		MIM-72 CHAPARRAL	2051	
		MIM-104 PATRIOT	2052	
		RIM-2 TERRIER	2053	
		RIM-7 SEA SPARROW	2054	
		RIM-8 TALOS	2055	
		RIM-24 TARTAR	2056	
		RIM-66 STANDARD MISSILE	2057	
		RIM-67 STANDARD MISSILE	2058	
		BLOWPIPE	2059	
		DISUSED	2060	THROUGH 2061
		SEA DART	2062	
		DISUSED	2063	
		SEA WOLF	2064	
		S 440 CROTALE EDIR	2065	
		RAPIER	2066	
		RBS-70 (SLM)	2067	
		DISUSED	2068	
		SAM ROLAND	2069	
		SA-2 GUIDELINE	2070	
		SA-3 GOA	2071	
		SA-4 GANEF	2072	
		SA-N-3 GOBLET	2073	
		SA-5 GAMMON	2074	
		SA-N-4 GECKO	2075	
		SA-6 GAINFUL	2076	
		SA-N-6 GRUMBLE	2077	
		SA-7 GRAIL	2078	

5.3-655

MIL-STD-6016B

FIELD CODING FOR J15.0C1

(SHEET 27)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE	(CONTINUED)	

		SA-8 GECKO	2079	
		SA-9 GASKIN	2080	
		SA-10 GRUMBLE	2081	
		SA-11 GADFLY	2082	
		SA-12	2083	
		SA-13 GOPHER	2084	
		MISTRAL	2085	
		SA-N-7 GADFLY	2086	
		SA-N-8 GREMLIN	2087	
		SA-14 GREMLIN	2088	
		SA-16 GIMLET	2089	
		SA-X-17	2090	
		SA-N-5 GRAIL	2091	
		SA-N-11 GRISOM	2092	
		SA-12A GLADIATOR	2093	
		SA-12B GIANT	2094	
		SA-14 GREMLIN	2095	
		SA-15 GAUNTLET	2096	
		SA-17 GRIZZLY	2097	
		SA-N-12 GRIZZLY	2098	
		SA-18 GROUSE	2099	
		SA-19 GRISOM	2100	
		RIM-116 RAM	2101	
		ADATS	2102	
		JAVELIN	2103	
		STARBURST	2104	
		STARSTREAK	2105	
		ASPIDER	2106	
		I-HAWK	2107	
		ROLAND II	2108	
		SM-2 BLOCK II	2109	
		SM-2 BLOCK III	2110	
		SM-2 BLOCK IIIA	2111	
		SM-2 BLOCK IIIB	2112	
		SM-2 BLOCK IV	2113	
		SM-2 BLOCK IVA	2114	
		SM-3 LEAP	2115	
		AKASH	2116	
		ANZA	2117	
		ANZA II	2118	
		CSA-1	2119	
		CSA-2	2120	
		CSA-4	2121	

5.3-656

MIL-STD-6016B

FIELD CODING FOR J15.0C1 (SHEET 28)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
804	001	AIR SPECIFIC TYPE -----	(CONTINUED)	
		CSA-5	2122	
		FM-80	2123	
		HN-5	2124	
		NK-7	2125	
		NK-16	2126	
		PANTZYR	2127	
		RAPIER 2000/JERNAS	2128	
		RBS-90	2129	
		SAKR	2130	
		SAVA	2131	
		SHANINE	2132	
		SKYGUARD ASPIDE	2133	
		SPADA	2134	
		TAM SAM	2135	
		TIGERCAT	2136	
		VANGUARD	2137	
		SA-N-1 GOA	2138	
		SA-N-9 GAUNTLET	2139	
		SA-N-10	2140	
		ALBATROS/ASPIDE	2141	
		SM-1	2142	
		VT1 CROTALE	2143	
		MASURCA	2144	
		ASTER 15	2145	
		ASTER 30	2146	
		UNDEFINED	2147 THROUGH 4093	
		RESET TO NO STATEMENT	4094	
		SURFACE-TO-AIR MISSILE GENERAL	4095	
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----		THE SPECIFIC TYPE OF POINT OR TRACK WITH AN ENVIRONMENT/CATEGORY OF SURFACE (MARITIME).
		NO STATEMENT	0	
		CV GENERAL	1	
		CLEMENCEAU	2	
		ENTERPRISE	3	
		FORRESTAL	4	
		JOHN F KENNEDY	5	
		KITTY HAWK	6	
		MIDWAY	7	
		NIMITZ	8	
		CHARLES DE GAULLE	9	

5.3-657

MIL-STD-6016B

FIELD CODING FOR J15.0C1 (SHEET 29)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		UNDEFINED	10 THROUGH 21	
		CVS GENERAL	22	
		DEDALO	23	
		MINAS GERAIS	24	
		VIKRANT	25	
		VEINTICINCO DE MAYO	26	
		VIRAAT	27	
		UNDEFINED	28 THROUGH 35	
		CVH GENERAL	36	
		GIUSEPPE GARIBALDI	37	
		INVINCIBLE	38	
		JEANNE D'ARC	39	
		KIEV	40	
		PRINCIPE DE ASTURIAS	41	
		UNDEFINED	42	
		KIEV (MODIFIED)	43	
		UNDEFINED	44 THROUGH 52	
		BB GENERAL	53	
		IOWA	54	
		UNDEFINED	55 THROUGH 64	
		CC GENERAL	65	
		SVERDLOV (MODIFIED)	66	
		UNDEFINED	67 THROUGH 76	
		CG GENERAL	77	
		ANDREA DORIA	78	
		BAINBRIDGE	79	
		BELKNAP	80	
		CALIFORNIA	81	
		UNDEFINED	82	
		KARA	83	
		KIROV	84	
		KRESTA I	85	
		KRESTA II	86	
		KYNDA	87	
		LEAHY	88	
		LONG BEACH	89	
		SLAVA	90	
		TICONDEROGA	91	
		TRUXTUN	92	
		VIRGINIA	93	
		VITTORIO VENETO	94	
		UNDEFINED	95 THROUGH 118	

5.3-658

MIL-STD-6016B

FIELD CODING FOR J15.0C1

(SHEET 30)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		CH GENERAL	119	
		MOSKVA	120	
		UNDEFINED	121 THROUGH 130	
		CA GENERAL	131	
		UNDEFINED	132	
		SVERDLOV	133	
		UNDEFINED	134 THROUGH 143	
		DD GENERAL	144	
		AKIZUKI	145	
		ALLEN M SUMNER	146	
		ALLEN M SUMNER FRAM II	147	
		ALMIRANTE	148	
		AMATSUKAZE	149	
		ANIMOSO	150	
		ANSHAN	151	
		ARLEIGH BURKE	152	
		ASAGARI	153	
		UNDEFINED	154	
		AUDACE	155	
		AYANAMI	156	
		DISUSED	157	
		CARPENTER FRAM I	158	
		CHARLES F ADAMS (MOD)	159	
		CHARLES F ADAMS	160	
		COONTZ	161	
		DISUSED	162 THROUGH 163	
		UNDEFINED	164	
		FLETCHER	165	
		FORREST SHERMAN (MOD) & HULL	166	
		FRIESLAND	167	
		GEARING FRAM I	168	
		GEARING FRAM II	169	
		UNDEFINED	170	
		DISUSED	171	
		HARUNA	172	
		HATAKAZE	173	
		HATSUYUKI	174	
		IMPAVIDO	175	
		KANIN	176	
		KASHIN (MODIFIED)	177	
		KASHIN	178	

5.3-659

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		KASHIN II	179	
		KIDD	180	
		UNDEFINED	181	
		KILDIN (MODIFIED)	182	
		KOTLIN	183	
		KOTLIN (MODIFIED)	184	
		LUDA (TYPE 051)	185	
		MEKO 360	186	
		MINEGUMO	187	
		PROJECT 15	188	
		ROBERT H SMITH	189	
		ROGER D LAURIA	190	
		SAM KOTLIN	191	
		SHIRANE	192	
		SKORY	193	
		SOVREMENYY	194	
		SPRUANCE	195	
		SUFFREN	196	
		TACHIKAZE	197	
		TAKATSUKI	198	
		TYPE 42	199	
		DISUSED	200	
		DISUSED	201	
		TYPE F-70 (AAW)	202	
		TYPE F-70 (ASW)	203	
		TYPE F-67	204	
		UNDEFINED	205	THROUGH 206
		TYPE T-53 (MODIFIED-ASW)	207	
		UNDEFINED	208	
		UDALOY	209	
		YAMAGUMO	210	
		Z	211	
		IROQUOIS	212	
		UNDEFINED	213	THROUGH 276
		DE GENERAL	277	
		UNDEFINED	278	
		CASTLE	279	
		UNDEFINED	280	THROUGH 295
		FF GENERAL	296	
		ALMIRANTE CLEMENTE	297	
		ALMIRANTE PEREIRA DA SILVA	298	

FIELD CODING FOR J15.0C1 (SHEET 32)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		ALPINO	299	
		DISUSED	300 THROUGH 301	
		BALEARES	302	
		BAPTISTA DE ANDRADE	303	
		UNDEFINED	304	
		BERK	305	
		BLACK SWAN	306	
		BROADSWORD (TYPE 22)	307	
		BRONSTEIN	308	
		BROOKE	309	
		CANNON	310	
		CHARLES LAWRENCE	311	
		CHENGDU	312	
		CHIKUGO	313	
		COMANDANTE JOAO BELO	314	
		UNDEFINED	315	
		CROSLEY	316	
		DEALEY	317	
		DESCUBIERTA	318	
		DUKE (TYPE 23)	319	
		DURANGO	320	
		EDSALL	321	
		GARCIA	322	
		GLOVER	323	
		GODAVARI	324	
		GRISHA I	325	
		GRISHA II	326	
		GRISHA III	327	
		UNDEFINED	328	
		GRISHA V	329	
		UNDEFINED	330	
		HVIDBJORNEN	331	
		ISHKARI	332	
		ISUZU	333	
		JACOB VAN HEEMSKERCK	334	
		JIANGDONG (TYPE 053J)	335	
		JIANGHU (TYPE 053H)	336	
		JIANGNAN	337	
		JOAO COUTINHO	338	
		KAREL DOORMAN	339	
		KNOX	340	
		DISUSED	341	

FIELD CODING FOR J15.0C1

(SHEET 33)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		KONI	342	
		KORTENAER	343	
		KRIVAK I	344	
		KRIVAK II	345	
		KRIVAK III	346	
		LA FAYETTE	347	
		DISUSED	348	
		LEOPARD	349	
		LUPU	350	
		M	351	
		DISUSED	352	
		MAESTRALE	353	
		MEKO 140 TYPE	354	
		MEKO 200 TYPE	355	
		MIRKA I	356	
		MIRKA II	357	
		NIELS JUEL	358	
		NITEROI	359	
		OLIVER HAZARD PERRY	360	
		OSLO	361	
		PEDER SKRAM	362	
		PETYA I (MODIFIED)	363	
		PETYA I	364	
		PETYA II (MODIFIED)	365	
		PETYA II	366	
		PETYA III	367	
		UNDEFINED	368	
		DISUSED	369	
		RIGA	370	
		RIVER	371	
		BRANDENBURG (TYPE 123)	372	
		RUDDEROW	373	
		SACHSEN (TYPE 124)	374	
		SAVAGE	375	
		DISUSED	376	
		TROMP	377	
		TYPE A 69	378	
		TYPE F-2000S	379	
		UNDEFINED	380 THROUGH 381	
		YUBARI	382	
		BREMEN (TYPE 122)	383	
		CLAUDE JONES	384	

5.3-662

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		FFG 7	385	
		HALIFAX	386	
		NAJIN	387	
		PRESIDENT	388	
		SANTA MARIA	389	
		VOSPER MK 5	390	
		VOSPERTHORNYCROFT MK 7	391	
		WIELINGEN	392	
		FLOREAL	393	
		COMMANDANT BORY	394	
		UNDEFINED	395 THROUGH 478	
		FS GENERAL	479	
		ALBATROS	480	
		AUK CLASS	481	
		DE CRISTOFARO	482	
		DISUSED	483	
		MINERVA	484	
		NANUCHKA I	485	
		NANUCHKA II	486	
		NANUCHKA III	487	
		DISUSED	488	
		PF-103	489	
		SAAR 5	490	
		SLEIPNER	491	
		TARANTUL I	492	
		TARANTUL II	493	
		DISUSED	494	
		WADI	495	
		UNDEFINED	496 THROUGH 517	
		LL GENERAL	518	
		UNDEFINED	519 THROUGH 528	
		LCC GENERAL	529	
		BLUE RIDGE	530	
		CAVEZZALE	531	
		UNDEFINED	532 THROUGH 540	
		LKA GENERAL	541	
		CHARLESTON	542	
		UNDEFINED	543 THROUGH 552	
		LFS GENERAL	553	
		UNDEFINED	554 THROUGH 563	
		LHA GENERAL	564	
		TARAWA	565	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		UNDEFINED	566 THROUGH 575	
		LHD GENERAL	576	
		WASP	577	
		UNDEFINED	578 THROUGH 587	
		LPA GENERAL	588	
		UNDEFINED	589 THROUGH 598	
		LPD GENERAL	599	
		AUSTIN	600	
		FEARLESS	601	
		IVAN ROGOV	602	
		UNDEFINED	603	
		RALEIGH	604	
		SAN GIORGIO	605	
		UNDEFINED	606 THROUGH 615	
		LPH GENERAL	616	
		IWO JIMA	617	
		UNDEFINED	618 THROUGH 627	
		LSD GENERAL	628	
		ANCHORAGE	629	
		ASHLAND	630	
		CABILDO	631	
		OURAGAN	632	
		FOUDRE	633	
		THOMASTON	634	
		WHIDBEY ISLAND	635	
		UNDEFINED	636 THROUGH 646	
		LSL GENERAL	647	
		SIR GERAINT	648	
		UNDEFINED	649 THROUGH 657	
		LSM GENERAL	658	
		ASHDOD	659	
		BATRAL	660	
		CAKABEY	661	
		EDIC I	662	
		EDIC II	663	
		LSM-1	664	
		MP-4	665	
		POLNOCHNY	666	
		POLOCHNY A	667	
		POLOCHNY B	668	
		POLOCHNY C	669	
		POLOCHNY D	670	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		YUDAO	671	
		YULIMG	672	
		BOUGAINVILLE	673	
		UNDEFINED	674 THROUGH 687	
		LST GENERAL	688	
		ALLIGATOR	689	
		ATSUMI	690	
		UNDEFINED	691	
		BROOKE MARINE 93M	692	
		CAKABEY NL-122	693	
		CNIM PS 700	694	
		DE SOTO COUNTY	695	
		DISUSED	696	
		HENGAM	697	
		LST 1-510	698	
		LST 511-1152	699	
		MIURA	700	
		NEWPORT	701	
		ROPUCHA	702	
		SARUCABEY	703	
		CNGF	704	
		OCEAN	705	
		ALBION	706	
		TERREBONNE PARISH	707	
		TOBRUK	708	
		UNDEFINED	709	
		YUKAN	710	
		UNDEFINED	711 THROUGH 730	
		LSV GENERAL	731	
		UNDEFINED	732 THROUGH 741	
		LC GENERAL	742	
		UNDEFINED	743 THROUGH 751	
		LCM GENERAL	752	
		CTM 1	753	
		HUNGNAM	754	
		LCM 1057/1058	755	
		LCM 6	756	
		LCM 8	757	
		T-4	758	
		TSAPLYA	759	
		LCM (TYPE 521)	760	
		UNDEFINED	761 THROUGH 772	

FIELD CODING FOR J15.0C1

(SHEET 37)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		LCP GENERAL	773	
		DISUSED	774	
		LCM 1031	775	
		LCM 1035/1036	776	
		LCM 1055/1056	777	
		NAMPO	778	
		UNDEFINED	779 THROUGH 788	
		LCPL GENERAL	789	
		UNDEFINED	790 THROUGH 799	
		LWC GENERAL	800	
		UNDEFINED	801 THROUGH 810	
		LCU GENERAL	811	
		BALIKPAPAN	812	
		BOMBARDA	813	
		BRAILA	814	
		LCU (TYPE 520)	815	
		DISUSED	816	
		DISUSED	817	
		DISUSED	818	
		DSM-501	819	
		HANCHON	820	
		HANTAE	821	
		KISHON	822	
		KVALSUND	823	
		LCT MK 5	824	
		LCT MK 6	825	
		LCU 501	826	
		MFP D-3	827	
		MZ	828	
		REINOYSUND	829	
		SMB-1	830	
		TU 57-M	831	
		US LCU 1466	832	
		VYDRA	833	
		YURA	834	
		UNDEFINED	835 THROUGH 866	
		LCVP GENERAL	867	
		UNDEFINED	868 THROUGH 877	
		LCAC GENERAL	878	
		AIST	879	
		GUS	880	
		LEBED	881	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		UTENOK	882	
		WELLINGTON BH-7 MK 4	883	
		WELLINGTON BH-7 MK 5	884	
		WINCHESTER (SR.N6)	885	
		UNDEFINED	886 THROUGH 896	
		MM GENERAL	897	
		ALESHA	898	
		ALVSBORG	899	
		BORGEN	900	
		CARLSKRONA	901	
		COSAR	902	
		FALSTER	903	
		FURUSUND (MUL-20)	904	
		LANGELAND	905	
		LINDORMEN	906	
		LSM-1 (MODIFIED)	907	
		MUL-11	908	
		MUL-12	909	
		DISUSED	910	
		SMITH	911	
		US YMP	912	
		VIDAR	913	
		UNDEFINED	914 THROUGH 935	
		MCS GENERAL	936	
		UNDEFINED	937 THROUGH 946	
		MCJ GENERAL	947	
		UNDEFINED	948 THROUGH 957	
		MCD GENERAL	958	
		KINGSTON	959	
		MUEHLHAUSEN MCD (TYPE 742A)	960	
		UNDEFINED	961 THROUGH 968	
		MCM GENERAL	969	
		UNDEFINED	970 THROUGH 979	
		MH GENERAL	980	
		UNDEFINED	981 THROUGH 990	
		MHO GENERAL	991	
		UNDEFINED	992 THROUGH 1001	
		MHC GENERAL	1002	
		ADJUTANT (MODIFIED)	1003	
		AGGRESSIVE	1004	
		CIRCE	1005	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		WEIDEN MHC (TYPE 332)	1006	
		KOBLENZ MHC (TYPE 331B)	1007	
		HAM	1008	
		HUNT	1009	
		LANDSORT	1010	
		LERICI	1011	
		MSC 50	1012	
		MSO 218	1013	
		MSO 503	1014	
		SAUDA	1015	
		SIRIUS	1016	
		DISUSED	1017	
		TRIPARTITE	1018	
		VANYA I	1019	
		SANDOWN (SRMH)	1020	
		UNDEFINED	1021 THROUGH 1029	
		MHSC GENERAL	1030	
		MARS	1031	
		UNDEFINED	1032 THROUGH 1043	
		MHI GENERAL	1044	
		BAY	1045	
		UNDEFINED	1046 THROUGH 1054	
		MHA GENERAL	1055	
		UNDEFINED	1056 THROUGH 1065	
		ML GENERAL	1066	
		UNDEFINED	1067 THROUGH 1076	
		MLC GENERAL	1077	
		CURLEW	1078	
		UNDEFINED	1079 THROUGH 1088	
		MLI GENERAL	1089	
		UNDEFINED	1090 THROUGH 1099	
		MLO GENERAL	1100	
		UNDEFINED	1101 THROUGH 1110	
		MLR GENERAL	1111	
		UNDEFINED	1112 THROUGH 1121	
		MLA GENERAL	1122	
		UNDEFINED	1123 THROUGH 1132	
		MLS GENERAL	1133	
		UNDEFINED	1134 THROUGH 1143	
		MS GENERAL	1144	
		UNDEFINED	1145 THROUGH 1154	
		MSF GENERAL	1155	

FIELD CODING FOR J15.0C1

(SHEET 40)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		EX-ERIMO	1156	
		K-8	1157	
		KROGULEC	1158	
		M-40	1159	
		MSO-421	1160	
		NATYA I	1161	
		NATYA II	1162	
		RIVER	1163	
		T-43	1164	
		YURKA	1165	
		UNDEFINED	1166	THROUGH 1180
		MSO GENERAL	1181	
		ACME	1182	
		AGGRESSIVE	1183	
		UNDEFINED	1184	THROUGH 1193
		MSC GENERAL	1194	
		136 FT	1195	
		ADJUTANT	1196	
		ARKOE	1197	
		BAY	1198	
		DOKKUM	1199	
		HATSUSHIMA	1200	
		HAYASE	1201	
		DISUSED	1202	
		KOUZJ	1203	
		LENIWKA	1204	
		HAMELN MSC (TYPE 343)	1205	
		MSC 268	1206	
		MSC 292	1207	
		MSC 294	1208	
		NOTEC	1209	
		SASHA	1210	
		SAUDA	1211	
		DISUSED	1212	
		DISUSED	1213	
		SONYA	1214	
		T-301	1215	
		T-43	1216	
		TAKAMI	1217	
		DISUSED	1218	
		VANYA	1219	
		VANYA I	1220	

5.3-669

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		VANYA II	1221	
		WUSONG	1222	
		ZHENYA	1223	
		UNDEFINED	1224 THROUGH 1263	
		MSI GENERAL	1264	
		DISUSED	1265	
		AUX MINESWEEPER NO 1	1266	
		CAPE	1267	
		FRAUENLOB (TYPE 394)	1268	
		HAM	1269	
		HERSTAL	1270	
		KIISKI	1271	
		KUHA	1272	
		M-111	1273	
		M-15	1274	
		M-31	1275	
		M-43/47	1276	
		PIPA-A	1277	
		WOCHANG	1278	
		YEVGENYA	1279	
		YUKTO	1280	
		UNDEFINED	1281 THROUGH 1302	
		MSR GENERAL	1303	
		UNDEFINED	1304 THROUGH 1313	
		MSB GENERAL	1314	
		K-8	1315	
		N-300	1316	
		NESTIN	1317	
		N0. 7	1318	
		OLYA	1319	
		PO-2	1320	
		TR-40	1321	
		VD-141	1322	
		VULCAIN	1323	
		STYX	1324	
		PLUTON	1325	
		ACHERON	1326	
		UNDEFINED	1327 THROUGH 1334	
		MSA GENERAL	1335	
		UNDEFINED	1336 THROUGH 1345	
		MSD GENERAL	1346	
		HFG-1 (TROIKA)	1347	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		ILYUSHA	1348	
		UNDEFINED	1349 THROUGH 1358	
		MCSD GENERAL	1359	
		UNDEFINED	1360 THROUGH 1369	
		MSS GENERAL	1370	
		ANDRYUSHA	1371	
		BALTIKA	1372	
		POLNOCNY	1373	
		UNDEFINED	1374 THROUGH 1383	
		MSH GENERAL	1384	
		UNDEFINED	1385 THROUGH 1394	
		MSO GENERAL	1395	
		BERLAIMONT (MODIFIED)	1396	
		UNDEFINED	1397 THROUGH 1405	
		MSHC GENERAL	1406	
		HUNT	1407	
		TRIPARTITE	1408	
		WILTON	1409	
		UNDEFINED	1410 THROUGH 1419	
		PP GENERAL	1420	
		AB 25	1421	
		UNDEFINED	1422	
		BALDER	1423	
		CASTLE	1424	
		ISLAND	1425	
		KRONSHADT	1426	
		PC-1638	1427	
		UNDEFINED	1428 THROUGH 1438	
		PG GENERAL	1439	
		BESKYTTEVREN	1440	
		BIHORO	1441	
		ERIMO	1442	
		DISUSED	1443	
		HVIDBJOERNEN	1444	
		IZU	1445	
		KOJIMA	1446	
		UNDEFINED	1447	
		NOJIMA	1448	
		PAUK	1449	
		PEACOCK	1450	
		POTI	1451	
		SAVAGE	1452	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		SHIRETOKO	1453	
		SOYA	1454	
		TACOMA	1455	
		LEOPARD (TYPE 148)	1456	
		BAMBU	1457	
		CASSIOPEA	1458	
		UNDEFINED	1459	THROUGH 1480
		PGS GENERAL	1481	
		UNDEFINED	1482	THROUGH 1491
		PGB GENERAL	1492	
		UNDEFINED	1493	THROUGH 1502
		PGF GENERAL	1503	
		ALBATROS (TYPE 143)	1504	
		ASHEVILLE	1505	
		BARNEGAT	1506	
		CHONGJU	1507	
		GEPAKD (TYPE 143A)	1508	
		HOUKU	1509	
		IVANSUSANIN	1510	
		KAMAN	1511	
		KARTAL	1512	
		KOMAR	1513	
		LA COMBATTANTE II	1514	
		LA COMBATTANTE III	1515	
		LURSSFN FPB 57 TYPE	1516	
		OKHTENSKIY	1517	
		OSA I	1518	
		OSA II	1519	
		P-4	1520	
		PURGA	1521	
		SAAR 2	1522	
		SAAR 3	1523	
		SAAR 4	1524	
		SAAR 5	1525	
		SARIWON	1526	
		SNOEGG	1527	
		SOHUNG	1528	
		SOJU	1529	
		SORUM	1530	
		STORM	1531	
		T	1532	
		T-43	1533	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		T-58	1534	
		VOSPER 100-FT	1535	
		VOSPER BRAVE	1536	
		WILLEMOES	1537	
		UNDEFINED	1538 THROUGH 1583	
		PC GENERAL	1584	
		ADMIRABLE	1585	
		AGDLEK	1586	
		AKIZUKI	1587	
		ATTACK	1588	
		BAY	1589	
		DISUSED	1590	
		BROOKE MARINE 108-FT	1591	
		CACINE	1592	
		CHONGJU	1593	
		DAPHNE	1594	
		GDANSK	1595	
		HAIKOU	1596	
		HAINAN	1597	
		HANOE	1598	
		K-48	1599	
		KRALJEVICA	1600	
		KRONSHADT	1601	
		LAKE	1602	
		MAGAEN	1603	
		MATSUNAMI	1604	
		MIZUTORI	1605	
		MURAKUMO	1606	
		OBLUZE	1607	
		PGM 71	1608	
		SDB MK II	1609	
		SDB MK III	1610	
		SEAFORTH	1611	
		SHANGHAI	1612	
		SHANGHAI II	1613	
		SHANGHAI II (MODIFIED)	1614	
		SHIKINAMI	1615	
		SO-1	1616	
		SOMAN	1617	
		STENKA	1618	
		T-58	1619	
		TAECHONG	1620	

FIELD CODING FOR J15.0C1

(SHEET 45)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		UK FORD	1621	
		UMIGIRI	1622	
		US 110-FT	1623	
		US 173-FT	1624	
		UNDEFINED	1625	
		ARCHER	1626	
		ATTACKER	1627	
		23M PC (MANLY)	1628	
		UNDEFINED	1629	THROUGH 1681
		PCF GENERAL	1682	
		BABOCHKA	1683	
		MURAVEY	1684	
		POTI	1685	
		SO-1 (MODIFIED)	1686	
		UNDEFINED	1687	THROUGH 1696
		PCE GENERAL	1697	
		UNDEFINED	1698	THROUGH 1707
		PB GENERAL	1708	
		AKAGI	1709	
		AKIZUKI	1710	
		ALBATROZ	1711	
		ATTACK P-90	1712	
		BARSO	1713	
		BAY	1714	
		BIZAN	1715	
		BROOKE MARINE 37.5M	1716	
		CHONGJIN	1717	
		DABUR	1718	
		DALARO	1719	
		DE L'ESTEREL	1720	
		DILOS	1721	
		DOM ALEIXO	1722	
		DISUSED	1723	
		FREMANTLE	1724	
		GOULANDRIS	1725	
		GUANABACOA	1726	
		HAMAGIRI	1727	
		HAMELIN 37M	1728	
		HIDAKA	1729	
		HUANGPU	1730	
		INTERCEPTOR MK II	1731	
		KIMJIN 67-FT	1732	

5.3-674

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		MATSUNAMI	1733	
		MURAKUMO	1734	
		OIRASE	1735	
		P 400	1736	
		P-6	1737	
		PANAGOPOULOS	1738	
		PATRA	1739	
		PBR MK II	1740	
		PBR MK III	1741	
		PGM 71	1742	
		PO-2	1743	
		POLISH K-8	1744	
		POLUCHAT I	1745	
		SHANTOU	1746	
		SHIKINAMI	1747	
		SINHUNG 72-FT	1748	
		SKANOER	1749	
		SOYA/TSUGARU	1750	
		SPEAR	1751	
		STEWART 85-FT	1752	
		SWATOW	1753	
		SWIFT	1754	
		TAISHAN	1755	
		TESHIO	1756	
		TRACKER II	1757	
		US 110-FT	1758	
		US ARMY 2001 65-FT	1759	
		USCG 83-FT	1760	
		VEDETTE 28 92-FT	1761	
		VIKRAM	1762	
		VOSPER 70-FT	1763	
		YAMAYURI	1764	
		ZHUK	1765	
		SNOEGG	1766	
		MARS	1767	
		TRIDENT	1768	
		UNDEFINED	1769 THROUGH 1842	
		PBF GENERAL	1843	
		CHAO (CHODO)	1844	
		DE L'ESTEREL	1845	
		GIRNE	1846	
		HAUK	1847	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		HUGIN	1848	
		SLEPEN	1849	
		UNDEFINED	1850	
		SPICA II	1851	
		MARS	1852	
		UNDEFINED	1853 THROUGH 1863	
		PBS GENERAL	1864	
		UNDEFINED	1865 THROUGH 1874	
		PBR GENERAL	1875	
		LEIE	1876	
		PIYAVKA	1877	
		SHMEL	1878	
		VOSH	1879	
		YATUSH	1880	
		YAZ	1881	
		UNDEFINED	1882 THROUGH 1891	
		PT GENERAL	1892	
		AN JU	1893	
		EPITROP	1894	
		HIGGINS 78-FT	1895	
		HUCHUAN PTH-	1896	
		HUZHOU	1897	
		IWON	1898	
		DISUSED	1899	
		KU SONG	1900	
		NO. 11	1901	
		P-4	1902	
		P-6	1903	
		PILICA	1904	
		SHERSHEN	1905	
		SIN HUNG	1906	
		SIN NAM	1907	
		SINPO	1908	
		SOLOVEN	1909	
		SPICA	1910	
		TJELD	1911	
		WISLA	1912	
		DISUSED	1913	
		SHANGDONG	1914	
		TURYA	1915	
		UNDEFINED	1916 THROUGH 2047	
		PHM GENERAL	2048	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		MATKA	2049	
		PEGASUS	2050	
		SARANCHA	2051	
		SHIMRIT	2052	
		SPARVIERO	2053	
		UNDEFINED	2054 THROUGH 2063	
		BM GENERAL	2064	
		UNDEFINED	2065 THROUGH 2074	
		BMR GENERAL	2075	
		UNDEFINED	2076 THROUGH 2085	
		SWCL GENERAL	2086	
		UNDEFINED	2087 THROUGH 2096	
		AA GENERAL	2097	
		UNDEFINED	2098 THROUGH 2107	
		AG GENERAL	2108	
		ADOLF	2109	
		AKIZUKI	2110	
		ANGARA	2111	
		ARGO	2112	
		AYANAMI	2113	
		DISUSED	2114 THROUGH 2115	
		CHAMOIS	2116	
		CHIHAYA	2117	
		DALDYN	2118	
		DISUSED	2119	
		DINGHAI	2120	
		ENDURANCE	2121	
		EXPLORER	2122	
		DISUSED	2123	
		FRIPONNE	2124	
		GALEB	2125	
		UNDEFINED	2126	
		HAM	2127	
		DISUSED	2128	
		HAYABUSA	2129	
		DISUSED	2130	
		ISLES	2131	
		KEYLA	2132	
		KURIHAMA	2133	
		L ' ARCHEONAUTE	2134	
		L ' ATHOS	2135	
		UNDEFINED	2136	

FIELD CODING FOR J15.0C1 (SHEET 49)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		LENTA	2137	
		LIANYUN	2138	
		LSIL	2139	
		MIZUTORI	2140	
		MP-2	2141	
		MP-8	2142	
		MURASAME	2143	
		NEFTEGAZ	2144	
		NØ. 81	2145	
		NORGE	2146	
		OHRE	2147	
		ONEGA	2148	
		DISUSED	2149	
		POSEIDON	2150	
		PS-10	2151	
		RARI	2152	
		RHIN	2153	
		SABAC	2154	
		SHAHSAVAR	2155	
		ST. LYKODIS	2156	
		STALWART	2157	
		T-43	2158	
		TAPATAI	2159	
		TAPPE	2160	
		THULE	2161	
		TOMBA	2162	
		TSUGARU	2163	
		UMITAKA	2164	
		US 184 FT. PCE	2165	
		US 72 FT. HMDL	2166	
		VANGUARD	2167	
		VIS	2168	
		VYTEGRALES	2169	
		WHISKEY	2170	
		WILHELM PULLWER (TYPE 741)	2171	
		PELIKAAN	2172	
		RANCE	2173	
		MERCURE	2174	
		STERNE	2175	
		ALBATROS	2176	
		PHENIX	2177	

5.3-678

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		UNDEFINED	2178 THROUGH 2256	
		ARV GENERAL	2257	
		ARGUS	2258	
		ENGADINE	2259	
		RELIANT	2260	
		UNDEFINED	2261 THROUGH 2270	
		AVT GENERAL	2271	
		LEXINGTON	2272	
		UNDEFINED	2273 THROUGH 2282	
		AE GENERAL	2283	
		EVROS	2284	
		DISUSED	2285	
		KILAUEA	2286	
		NITRO	2287	
		REGENT	2288	
		SURIBACHI	2289	
		WESTERWALD (TYPE 760)	2290	
		UNDEFINED	2291 THROUGH 2301	
		AEL GENERAL	2302	
		UNDEFINED	2303 THROUGH 2312	
		AET GENERAL	2313	
		UNDEFINED	2314 THROUGH 2323	
		AETL GENERAL	2324	
		UNDEFINED	2325 THROUGH 2334	
		AGF GENERAL	2335	
		ABDIEL	2336	
		CORONADO	2337	
		GODETIA	2338	
		LA SALLE	2339	
		DISUSED	2340	
		ZINNIA	2341	
		ELBE (TYPE 404)	2342	
		UNDEFINED	2343 THROUGH 2351	
		ACM GENERAL	2352	
		UNDEFINED	2353 THROUGH 2362	
		APB GENERAL	2363	
		MICHELANGELO	2364	
		UNDEFINED	2365 THROUGH 2374	
		ABU GENERAL	2375	
		CARDENAS	2376	
		FINIK I	2377	
		KARPF II	2378	

FIELD CODING FOR J15.0C1 (SHEET 51)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		SKB 64	2379	
		YANTAI	2380	
		YANNAN	2381	
		YANGUAN	2382	
		TIANEE	2383	
		LA PRUDENTE	2384	
		UNDEFINED	2385	THROUGH 2395
		ABUD GENERAL	2396	
		UNDEFINED	2397	THROUGH 2406
		ANL GENERAL	2407	
		UNDEFINED	2408	THROUGH 2417
		ARC GENERAL	2418	
		EMBA I	2419	
		EMBA II	2420	
		KALAR	2421	
		KLASMA	2422	
		MP-2	2423	
		NEPTUNE	2424	
		TELNOVSK (MODIFIED)	2425	
		YOUDIAN	2426	
		ZEUS	2427	
		UNDEFINED	2428	THROUGH 2440
		AK GENERAL	2441	
		2ND LT JOHN P BOBO	2442	
		ALCHIBA	2443	
		AMGUEMA	2444	
		ANDIZHAN	2445	
		ANDONG	2446	
		ANDROMEDA (CONVERTED)	2447	
		DISUSED	2448	
		BARRICADE	2449	
		BITTERBUSH	2450	
		C3-S-33A TYPE (CONVERTED)	2451	
		C4-S-66A TYPE	2452	
		C4-S-69B TYPE	2453	
		C4-S-A3 TYPE	2454	
		C5-S-75A TYPE	2455	
		CHULYM	2456	
		CPL LOUIS J HAUGE JR	2457	
		DINGHAI	2458	
		DONBA SS	2459	

FIELD CODING FOR J15.0C1

(SHEET 52)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		FS DESIGN 330	2460	
		GALATI	2461	
		HONGQI	2462	
		ISLES	2463	
		KANARYA	2464	
		KOLOMNA	2465	
		LENINGRADSKY KOMSOMOLETS	2466	
		LSIL	2467	
		NEON ANTONOV	2468	
		NORWALK	2469	
		PT-61	2470	
		SGT MATEJ KOCAK	2471	
		THROSK	2472	
		TREE	2473	
		YANHANG	2474	
		YUNYY PARTIZAN	2475	
		UNDEFINED	2476	THROUGH 2521
		AKL GENERAL	2522	
		ELTANIN	2523	
		KEYLA	2524	
		UNDEFINED	2525	
		LENTA	2526	
		UNDEFINED	2527	
		MP 4	2528	
		MP 6	2529	
		MUNA	2530	
		SEKSTAN	2531	
		TELNOVSK	2532	
		WISTING	2533	
		GORGONA	2534	
		UNDEFINED	2535	THROUGH 2549
		AKR GENERAL	2550	
		ALGOL (SL 7)	2551	
		CALLAGHAN	2552	
		COMET	2553	
		METEOR	2554	
		DISUSED	2555	
		MAINE (CONVERTED)	2556	
		UNDEFINED	2557	THROUGH 2566
		AFS GENERAL	2567	
		FORT	2568	
		UNDEFINED	2569	

5.3-681

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		MARS	2570	
		RESOURCE	2571	
		UNDEFINED	2572 THROUGH 2580	
		AOE GENERAL	2581	
		SACRAMENTO	2582	
		SAGAMI	2583	
		UNDEFINED	2584 THROUGH 2593	
		AD GENERAL	2594	
		YELLOWSTONE	2595	
		SAMUEL GOMPERS	2596	
		DIXIE	2597	
		STALWART	2598	
		UNDEFINED	2599 THROUGH 2608	
		AWW GENERAL	2609	
		UNDEFINED	2610 THROUGH 2619	
		AH GENERAL	2620	
		HAVEN	2621	
		OB	2622	
		DISUSED	2623	
		UNDEFINED	2624 THROUGH 2632	
		AGB GENERAL	2633	
		DOBRYNYA NIKITICH	2634	
		HANSE	2635	
		IVANSUSANIN	2636	
		SHIRASE	2637	
		YANHA	2638	
		UNDEFINED	2639 THROUGH 2648	
		AGBL GENERAL	2649	
		EISVOGEL (TYPE 721)	2650	
		DISUSED	2651	
		UNDEFINED	2652 THROUGH 2661	
		AGI GENERAL	2662	
		ALPINIST	2663	
		ARMINZA	2664	
		UNDEFINED	2665	
		BALZAM	2666	
		BOLOGOE	2667	
		DISUSED	2668	
		HAM	2669	
		DISUSED	2670	
		DISUSED	2671	
		LENTA	2672	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		MAYAK	2673	
		MIRNY	2674	
		MOMA	2675	
		NIKOLAY ZUBOV	2676	
		OKEAN	2677	
		DISUSED	2678	
		PAMIR	2679	
		PRIMORYE	2680	
		ALSTER (TYPE 423)	2681	
		UNDEFINED	2682 THROUGH 2705	
		ALS GENERAL	2706	
		UNDEFINED	2707 THROUGH 2716	
		AEM GENERAL	2717	
		AMGA	2718	
		ANDIZHAN (MODIFIED)	2719	
		LAMA	2720	
		MALINA	2721	
		MELITOPOL	2722	
		MP 6	2723	
		UNDEFINED	2724 THROUGH 2733	
		AGM GENERAL	2734	
		AGM-24	2735	
		GEN HOYT S VANDENBERG	2736	
		OBSERVATION ISLAND	2737	
		RANGE SENTINEL	2738	
		(HASKELL TYPE)		
		REDSTONE	2739	
		UNDEFINED	2740 THROUGH 2749	
		AGOR GENERAL	2750	
		ABKHAZIYA	2751	
		AKADEMIK KRYLOV	2752	
		ARAD	2753	
		BALIKPAPAN	2754	
		BELGICA	2755	
		DISUSED	2756	
		COOK	2757	
		D'ENTRECASTEAUX	2758	
		DOBRYNYA NIKITICH	2759	
		DONG MING	2760	
		ELTANIN	2761	
		ENDEAVOR	2762	
		FRANCESCO NULLO	2763	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		DISUSED	2764	
		GRIGORE ANTIPA	2765	
		GYRE	2766	
		HAYES	2767	
		HECLA	2768	
		MELVILLE	2769	
		MSC 60	2770	
		NAUTILUS	2771	
		NEVELSKOY	2772	
		NIKOLAY ZUBOV	2773	
		PITHEAS	2774	
		POLYUS	2775	
		QUEST	2776	
		ROBERT D CONRAD	2777	
		T-43	2778	
		TRITON	2779	
		TUI	2780	
		TYDEMAN	2781	
		XIANG YANG HONG	2782	
		YANLUN	2783	
		YUG	2784	
		ZENOBE GRAMME	2785	
		MAYAK	2786	
		UNDEFINED	2787 THROUGH 2823	
		AGOB GENERAL	2824	
		POLARSTERN	2825	
		UNDEFINED	2826 THROUGH 2835	
		AGOS GENERAL	2836	
		UNDEFINED	2837 THROUGH 2845	
		AO GENERAL	2846	
		UNDEFINED	2847	
		AKAR	2848	
		ALBAY BURBAK	2849	
		ALTAY	2850	
		UNDEFINED	2851	
		BASKUNCHAK	2852	
		BAYLEAF	2853	
		BINBASI GURGAN	2854	
		DISUSED	2855	
		CIMARRON	2856	
		CIMARRON (JUMBOISED)	2857	
		DORA	2858	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		HAMANA	2859	
		DISUSED	2860	
		DISUSED	2861	
		HENRY J KAISER	2862	
		IRTYSH	2863	
		KALININGRADNEFT	2864	
		KHOB	2865	
		KONDA	2866	
		METTAWEE	2867	
		MISPILLION (JUMBOISED)	2868	
		MOSKIT	2869	
		NEOSHO	2870	
		NERCHA	2871	
		NORWEGIAN BOW	2872	
		OLEKMA	2873	
		PATAPSCO	2874	
		PEVEK	2875	
		UNDEFINED	2876	
		SOFIYA	2877	
		SPESSART (TYPE 704A)	2878	
		TASKIZAK	2879	
		USEDOM	2880	
		WALCHENSEE (TYPE 703)	2881	
		WAVE	2882	
		DISUSED	2883	
		YUZBASI TOLUNAY	2884	
		BRAMBLELEAF	2885	
		UNDEFINED	2886 THROUGH 2936	
		AOT GENERAL	2937	
		AMERICAN EXPLORER	2938	
		AOTL	2939	
		EBANOL	2940	
		FULIN	2941	
		FUZHOU	2942	
		GUANZGHOU	2943	
		LEIZHOU	2944	
		MAUMEE	2945	
		METTAWEE	2946	
		MISSION	2947	
		POTOMOC	2948	
		SEALIFT	2949	
		SUAMICO	2950	

FIELD CODING FOR J15.0C1

(SHEET 57)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		T 5 TYPE	2951	
		TM2	2952	
		PORT VENDRES	2953	
		UNDEFINED	2954 THROUGH 2973	
		AOTL GENERAL	2974	
		DISUSED	2975	
		KHOB1	2976	
		UNDEFINED	2977 THROUGH 2986	
		AOR GENERAL	2987	
		BANDAR ABBAS	2988	
		BEREZINA	2989	
		BORIS CHILIKIN	2990	
		CAPITAN OLA PANTOJA	2991	
		DEEPAK	2992	
		DUBNA	2993	
		DURANCE	2994	
		FUQING	2995	
		KAZBEK	2996	
		KHARG	2997	
		MEERSBURG (TYPE 701C)	2998	
		MESAR	2999	
		OLWEN	3000	
		POOLSTER	3001	
		POLYARNIK	3002	
		PROTECTEUR	3003	
		PROVIDER	3004	
		ROVER	3005	
		SAO GABRIEL	3006	
		STROMBOLI	3007	
		TIDE (IMPROVED)	3008	
		UDA	3009	
		WICHITA	3010	
		FORT VICTORIA	3011	
		BERLIN (TYPE 702C)	3012	
		UNDEFINED	3013 THROUGH 3042	
		AORL GENERAL	3043	
		LEIZHOU	3044	
		UNDEFINED	3045 THROUGH 3054	
		AOL GENERAL	3055	
		PUNARUU	3056	
		UNDEFINED	3057 THROUGH 3065	
		AGP GENERAL	3066	

5.3-686

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		GRAHAM COUNTY	3067	
		NORGE	3068	
		DISUSED	3069	
		MERCUUR	3070	
		UNDEFINED	3071 THROUGH 3079	
		AP GENERAL	3080	
		MIKHAIL KALININ	3081	
		PANDORA	3082	
		QIONGSHA	3083	
		UNDEFINED	3084 THROUGH 3093	
		AGR GENERAL	3094	
		UNDEFINED	3095 THROUGH 3104	
		AOSR GENERAL	3105	
		UNDEFINED	3106 THROUGH 3115	
		AR GENERAL	3116	
		ACHELOUS	3117	
		AJAX	3118	
		AMPHION	3119	
		AMUR	3120	
		ARL I	3121	
		DALIANG	3122	
		DILIGENCE	3123	
		DIXIE	3124	
		JULES VERNE	3125	
		OSKOL	3126	
		RHIN	3127	
		STALWART	3128	
		UNDEFINED	3129 THROUGH 3145	
		ARL GENERAL	3146	
		ARCHELOUS	3147	
		UNDEFINED	3148 THROUGH 3157	
		AGE GENERAL	3158	
		BELGICA	3159	
		BERRY	3160	
		UNDEFINED	3161	
		COMMANDANT RIVIERE	3162	
		DESNA	3163	
		DOBRYNYA NIKITICH	3164	
		EF 3	3165	
		HENRI POINCARE	3166	
		ILE D'OLERON	3167	
		IVANSUSANIN	3168	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		KOLOMNA	3169	
		LENTRA	3170	
		MARSHAL NEDELIN	3171	
		MOMA	3172	
		MP-8	3173	
		MUNA	3174	
		NARVIK	3175	
		OS-3	3176	
		POINT LOMA	3177	
		POTOK	3178	
		QUARTO	3179	
		SASHA	3180	
		SIBIR	3181	
		SO-1	3182	
		T-43	3183	
		TRITON	3184	
		DISUSED	3185	
		YAL 01	3186	
		YANXI	3187	
		ROSSETTI	3188	
		DENTI	3189	
		MONGE	3190	
		UNDEFINED	3191 THROUGH 3227	
		ARS GENERAL	3228	
		BOLSTER	3229	
		DISUSED	3230	
		INGUL	3231	
		KATUN I	3232	
		KATUN II	3233	
		KOWAN	3234	
		LSIL 351	3235	
		MIKHAIL RUDNITSKY	3236	
		OREL	3237	
		PAMIR	3238	
		PIAST	3239	
		PROTEO	3240	
		PS-11	3241	
		SAFEGUARD	3242	
		SILVA	3243	
		SPASILAC	3244	
		DISUSED	3245	
		US 149 FT	3246	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		YANDING	3247	
		UNDEFINED	3248 THROUGH 3273	
		ARSD GENERAL	3274	
		UNDEFINED	3275 THROUGH 3284	
		ASVR GENERAL	3285	
		UNDEFINED	3286 THROUGH 3295	
		AOS GENERAL	3296	
		ALATNA	3297	
		LUZA	3298	
		URAL	3299	
		VALA	3300	
		TONTI	3301	
		UNDEFINED	3302 THROUGH 3311	
		AF GENERAL	3312	
		CROITOR	3313	
		DANLIN	3314	
		MAYAK	3315	
		RIEGEL	3316	
		UNDEFINED	3317 THROUGH 3326	
		AKS GENERAL	3327	
		UNDEFINED	3328 THROUGH 3337	
		AKSL GENERAL	3338	
		UNDEFINED	3339 THROUGH 3348	
		AFL GENERAL	3349	
		UNDEFINED	3350 THROUGH 3359	
		ASR GENERAL	3360	
		ANTEO	3361	
		CHANTICLEER	3362	
		DAHIANG	3363	
		DALANG	3364	
		ELBRUS	3365	
		FEHMARN (TYPE 720B)	3366	
		FUSHIMI	3367	
		GALATI	3368	
		HUDONG	3369	
		KURTARAN	3370	
		NEPA	3371	
		PIGEON	3372	
		PRUT	3373	
		ROSLAVL	3374	
		SPASILAC	3375	
		VALDAY	3376	

FIELD CODING FOR J15.0C1 (SHEET 61)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		ZHONGHUA	3377	
		UNDEFINED	3378	THROUGH 3401
		AS GENERAL	3402	
		ACHELOUS	3403	
		AEGIR	3404	
		DISUSED	3405	
		ATREK	3406	
		CHİYODA	3407	
		DADONG	3408	
		DAZHOU	3409	
		DIVER	3410	
		DNEPR	3411	
		DNEPR (MODIFIED)	3412	
		DON	3413	
		EMORY S LAND	3414	
		FULTON	3415	
		HUNLEY	3416	
		L Y SPEAR	3417	
		PROTEUS	3418	
		DISUSED	3419	
		SIMON LAKE	3420	
		UGRA	3421	
		UNDEFINED	3422	THROUGH 3447
		ASL GENERAL	3448	
		UNDEFINED	3449	THROUGH 3458
		AGS GENERAL	3459	
		AGS 39 CLASS	3460	
		AKASHI	3461	
		ALMEIDA CARVALHO	3462	
		AMMIRAGLIO MAGNAGHI	3463	
		ANDRIJA MOHOROVICIC	3464	
		AUK	3465	
		BIYA	3466	
		BOLOGUE	3467	
		UNDEFINED	3468	
		BUYSKES	3469	
		C4-S-A1 TYPE (CONVERTED)	3470	
		CHAUVENET	3471	
		COOK	3472	
		DING HAI	3473	
		FINIK	3474	
		FS DESIGN 330	3475	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		FUTAMI	3476	
		HAMASHIO	3477	
		HEIYO	3478	
		KAIBOKAN I	3479	
		KAIYO	3480	
		KAMENKA	3481	
		DISUSED	3482	
		UNDEFINED	3483	
		L'ESPERANCE	3484	
		UNDEFINED	3485	
		LENTRA	3486	
		LSIL	3487	
		MEIYO	3488	
		MELITOPOL	3489	
		MOMA	3490	
		MONOWAI	3491	
		MORESBY	3492	
		MP-8	3493	
		MSC-294 (BLUEBIRD)	3494	
		NYRYAT I	3495	
		NYRYAT II	3496	
		SAMARA	3497	
		SHOYO	3498	
		SILAS BENT	3499	
		STERNE	3500	
		SUMA	3501	
		T-43	3502	
		TAKUYO	3503	
		TELNOVSK	3504	
		TELNOVSK (MODIFIED)	3505	
		TENYO	3506	
		VICTORY (CONVERTED)	3507	
		WILKES	3508	
		YANLAI	3509	
		YANXU	3510	
		MIRTO	3511	
		MARS	3512	
		LAPEROUSE	3513	
		UNDEFINED	3514 THROUGH 3579	
		AGSA GENERAL	3580	
		UNDEFINED	3581 THROUGH 3590	
		AGSC GENERAL	3591	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		EXPLORER	3592	
		FLINDERS	3593	
		TAINO	3594	
		BULLDOG	3595	
		ROEBUCK	3596	
		UNDEFINED	3597 THROUGH 3604	
		AX GENERAL	3605	
		ARIS	3606	
		DISUSED	3607	
		JADRAN	3608	
		JERVIS BAY	3609	
		JOSE MARTI	3610	
		MP-8	3611	
		SMOLNY	3612	
		UGRA	3613	
		VIETNAM HEROICO	3614	
		WODNIK	3615	
		UNDEFINED	3616 THROUGH 3630	
		AXL GENERAL	3631	
		UNDEFINED	3632	
		LEOPARD	3633	
		MAYAK	3634	
		UNDEFINED	3635 THROUGH 3642	
		AXS GENERAL	3643	
		AMERIGO VESPUCCI	3644	
		CAROLY	3645	
		CARSARO II	3646	
		GORCH FOCK (TYPE 441A)	3647	
		MIRCEA	3648	
		PALINURO	3649	
		SAGRES	3650	
		STELLA POLARE	3651	
		UNDEFINED	3652 THROUGH 3659	
		AT GENERAL	3660	
		UNDEFINED	3661 THROUGH 3665	
		ATA GENERAL	3666	
		ABNAKI	3667	
		APACHE	3668	
		ARMY 254	3669	
		ATAK	3670	
		ATLANTE	3671	
		AZUMA	3672	

FIELD CODING FOR J15.0C1 (SHEET 64)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		BELIER	3673	
		UNDEFINED	3674	
		GAJ	3675	
		GNIEWKO	3676	
		GORYN	3677	
		GROMOVOY	3678	
		KUDRET	3679	
		MAITO	3680	
		MB-31	3681	
		MB-65	3682	
		MOTYL	3683	
		OKHTENSKIY	3684	
		ONCU	3685	
		POWHATAN	3686	
		ROSLAVL	3687	
		ROYSTERER	3688	
		SAINT	3689	
		SCHULTZ XAVIER	3690	
		SORUM	3691	
		TENACE	3692	
		TUZHONG	3693	
		TYPHOON	3694	
		WANGEROOGE (TYPE 722B)	3695	
		ZENIT	3696	
		MAITO	3697	
		ARMEN	3698	
		UNDEFINED	3699 THROUGH 3737	
		ATR GENERAL	3738	
		TENACE	3739	
		UNDEFINED	3740 THROUGH 3748	
		ATS GENERAL	3749	
		EDENTON	3750	
		OKHTENSKY	3751	
		LANGE00G (TYPE 754)	3752	
		ARGUS	3753	
		UNDEFINED	3754 THROUGH 3762	
		AWT GENERAL	3763	
		UNDEFINED	3764	
		BASENTO	3765	
		FUZHOU (MODIFIED)	3766	
		KANGAN	3767	
		LEIZHOU (MODIFIED)	3768	

FIELD CODING FOR J15.0C1

(SHEET 65)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE -----	(CONTINUED)	
		LSIL	3769	
		MANYCH	3770	
		MINCIO	3771	
		PIAVE	3772	
		TEVERE	3773	
		ULUBAT	3774	
		VODA	3775	
		YW-83	3776	
		Z	3777	
		UNDEFINED	3778 THROUGH 3797	
		SERVICE CRAFT GENERAL	3798	
		BARGE, GENERAL	3799	
		YO GENERAL	3800	
		YOG GENERAL	3801	
		YHT GENERAL	3802	
		YRNS GENERAL	3803	
		YOS GENERAL	3804	
		YPK GENERAL	3805	
		YRR GENERAL	3806	
		YRB GENERAL	3807	
		YRST GENERAL	3808	
		YOM GENERAL	3809	
		YOSS GENERAL	3810	
		YW GENERAL	3811	
		UNDEFINED	3812 THROUGH 3827	
		YD GENERAL	3828	
		YM GENERAL	3829	
		YFD GENERAL	3830	
		YFP GENERAL	3831	
		YGT GENERAL	3832	
		YR GENERAL	3833	
		UNDEFINED	3834 THROUGH 3840	
		YFD GENERAL	3841	
		YFDB GENERAL	3842	
		YFDM GENERAL	3843	
		YFDL GENERAL	3844	
		UNDEFINED	3845 THROUGH 3850	
		YRD GENERAL	3851	
		YRDB GENERAL	3852	
		YRDM GENERAL	3853	
		YRDL GENERAL	3854	
		UNDEFINED	3855 THROUGH 3861	

5.3-694

MIL-STD-6016B

FIELD CODING FOR J15.0C1 (SHEET 66)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		LIGHTER GENERAL	3862	
		YE GENERAL	3863	
		YF GENERAL	3864	
		YFC GENERAL	3865	
		YFR GENERAL	3866	
		YC GENERAL	3867	
		YFT GENERAL	3868	
		UNDEFINED	3869 THROUGH 3878	
		YT GENERAL	3879	
		YTB GENERAL	3880	
		YTM GENERAL	3881	
		YTL GENERAL	3882	
		UNDEFINED	3883 THROUGH 3892	
		YAGF GENERAL	3893	
		YAG GENERAL	3894	
		YV GENERAL	3895	
		YNG GENERAL	3896	
		YP GENERAL	3897	
		YFU GENERAL	3898	
		YAM GENERAL	3899	
		YNC GENERAL	3900	
		YLC GENERAL	3901	
		YVS GENERAL	3902	
		YRG GENERAL	3903	
		YAGT GENERAL	3904	
		YPT GENERAL	3905	
		YRC GENERAL	3906	
		YDT GENERAL	3907	
		YNT GENERAL	3908	
		YH GENERAL	3909	
		YFB GENERAL	3910	
		YTR GENERAL	3911	
		YFL GENERAL	3912	
		YAC GENERAL	3913	
		YSR GENERAL	3914	
		YSG GENERAL	3915	
		YDG GENERAL	3916	
		KHABAROV	3917	
		UNDEFINED	3918 THROUGH 3936	
		TM GENERAL	3937	
		TMD GENERAL	3938	
		TMB GENERAL	3939	

FIELD CODING FOR J15.0C1 (SHEET 67)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		TMK GENERAL	3940	
		TMF GENERAL	3941	
		TMC GENERAL	3942	
		TMCS GENERAL	3943	
		TMWW GENERAL	3944	
		TMA GENERAL	3945	
		TMH GENERAL	3946	
		TMGB GENERAL	3947	
		TMI GENERAL	3948	
		TML GENERAL	3949	
		TMOT GENERAL	3950	
		TMM GENERAL	3951	
		TMP GENERAL	3952	
		TMFR GENERAL	3953	
		TMR GENERAL	3954	
		TMOR GENERAL	3955	
		TMOL GENERAL	3956	
		TME GENERAL	3957	
		TMGS GENERAL	3958	
		TMLS GENERAL	3959	
		TMS GENERAL	3960	
		TMOS GENERAL	3961	
		TMO GENERAL	3962	
		TMX GENERAL	3963	
		TMWT GENERAL	3964	
		UNDEFINED	3965 THROUGH 3989	
		TMT GENERAL	3990	
		TMTR GENERAL	3991	
		TMTS GENERAL	3992	
		UNDEFINED	3993 THROUGH 4002	
		TU GENERAL	4003	
		TUF GENERAL	4004	
		TUB GENERAL	4005	
		TUI GENERAL	4006	
		TUR GENERAL	4007	
		TUT GENERAL	4008	
		TUS GENERAL	4009	
		TUC GENERAL	4010	
		TUW GENERAL	4011	
		UNDEFINED	4012 THROUGH 4023	
		TJ GENERAL	4024	
		TJF GENERAL	4025	

FIELD CODING FOR J15.0C1

(SHEET 68)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

808	001	SURFACE (MARITIME) SPECIFIC TYPE	(CONTINUED)	

		TJC GENERAL	4026	
		TJCS GENERAL	4027	
		TJGB GENERAL	4028	
		UNDEFINED	4029 THROUGH 4038	
		TS GENERAL	4039	
		TSG GENERAL	4040	
		TSR GENERAL	4041	
		UNDEFINED	4042 THROUGH 4052	
		MPS GENERAL	4053	
		UNDEFINED	4054 THROUGH 4069	
		SURFACE SPECIFIC TYPE 1-25	4070 THROUGH 4094	
		RESET TO NO STATEMENT	4095	

809	001	SUBSURFACE (MARITIME) SPECIFIC TYPE		THE SPECIFIC TYPE OF POINT OR TRACK WITH AN ENVIRONMENT/CATEGORY OF SUBSURFACE (MARITIME).

		NO STATEMENT	0	
		SS GENERAL	1	
		ABTA0 SS	2	
		DISUSED	3	
		DISUSED	4	
		UNDEFINED	5	
		DISUSED	6	
		GUPPY II SS	7	
		GUPPY IIA SS	8	
		GUPPY III SS	9	
		HAI LUNG SS	10	
		DISUSED	11	
		SAURO (TYPE 1081) SS	12	
		SAURO (IMPROVED) SS	13	
		TANG SS	14	
		TYPE SNA 72 SS	15	
		UZUSHIO SS	16	
		WALRUS SS	17	
		YUUSHIO SS	18	
		UNDEFINED	19	
		DISUSED	20	
		PELOSI SS	21	
		UNDEFINED	22 THROUGH 360	
		SSB GENERAL	361	
		GOLF SSB	362	

5.3-697

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
809	001	SUBSURFACE (MARITIME) SPECIFIC (CONTINUED)		
		TYPE		

		GOLF II SSB	363	
		GOLF III SSB	364	
		GOLF V SSB	365	
		UNDEFINED	366	THROUGH 440
		SSBN GENERAL	441	
		BENJAMIN FRANKLIN SSBN	442	
		DELTA I SSBN	443	
		DELTA II SSBN	444	
		DELTA III SSBN	445	
		DELTA IV SSBN	446	
		HOTEL III SSBN	447	
		DISUSED	448	
		L'INFLEXIBLE SSBN	449	
		DISUSED	450	
		UNDEFINED	451	
		OHIO SSBN	452	
		RESOLUTION SSBN	453	
		TYPHOON SSBN	454	
		VANGUARD SSBN	455	
		YANKEE SSBN	456	
		YANKEE I SSBN	457	
		YANKEE II SSBN	458	
		XIA SSBN	459	
		LE TERRIBLE SSBN	460	
		UNDEFINED	461	THROUGH 720
		SSN GENERAL	721	
		AKULA SSN	722	
		ALFA SSN	723	
		AMATHEPT SSN	724	
		CHARLIE/VICTOR SSGN/SSN	725	
		CHURCHILL SSN	726	
		ECHO/NOVEMBER SSGN/SSN	727	
		DISUSED	728	
		DISUSED	729	
		HAN SSN	730	
		HOTEL SSN	731	
		LOS ANGELES SSN	732	
		MIKE SSN	733	
		NARWHAL SSN	734	
		DISUSED	735	
		RUBIS SSN	736	
		SEAWOLF SSN	737	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
809	001	SUBSURFACE (MARITIME) SPECIFIC (CONTINUED)		
		TYPE		

		SIERRA SSN	738	
		DISUSED	739	
		DISUSED	740	
		STURGEON SSN	741	
		SWIFTSURE SSN	742	
		TRAFALGAR SSN	743	
		DISUSED	744	
		VICTOR I SSN	745	
		VICTOR II SSN	746	
		VICTOR III SSN	747	
		YANKEE SSN	748	
		VIRGINIA SSN	749	
		UNDEFINED	750 THROUGH 1200	
		SSG GENERAL	1201	
		JULIETT SSG	1202	
		UNDEFINED	1203 THROUGH 1245	
		SSGN GENERAL	1246	
		CHARLIE I SSGN	1247	
		CHARLIE II SSGN	1248	
		ECHO II SSGN	1249	
		OSCAR SSGN	1250	
		PAPA SSGN	1251	
		UNDEFINED	1252 THROUGH 1345	
		SSK GENERAL	1346	
		AGOSTA SSK	1347	
		UNDEFINED	1348	
		FOXTROT SSK	1349	
		HEROJ SSK	1350	
		KILO SSK	1351	
		MING SSK	1352	
		NARVAL SSK	1353	
		DISUSED	1354 THROUGH 1355	
		ROMEO SSK	1356	
		SAVA SSK	1357	
		SUTJESKA SSK	1358	
		TANGO SSK	1359	
		UPHOLDER SSK	1360	
		WHISKEY SSK	1361	
		WHISKEY V SSK	1362	
		ZULU IV SSK	1363	
		DORIS SSK	1364	
		VICTORIA SSK	1365	

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
-----	-----	-------------	-------------	--------------------

809	001	SUBSURFACE (MARITIME) SPECIFIC (CONTINUED)		
		TYPE		

		TYPE 212 SSK	1366	
		UNDEFINED	1367	THROUGH 1665
		SSC GENERAL	1666	
		DELFINEN SSC	1667	
		DRAKEN SSC	1668	
		NAECKEN SSC	1669	
		NARHVALEN SSC	1670	
		SJOORMEN SSC	1671	
		TOTI TYPE 1075 SSC	1672	
		TYPE 205 SSC	1673	
		TYPE 206 SSC	1674	
		KOBBEN SSC	1675	
		TYPE 209 (TYPE 1100) SSC	1676	
		TYPE 209 (TYPE 1200) SSC	1677	
		TYPE 209 (TYPE 1300) SSC	1678	
		TYPE 209 (TYPE 1400) SSC	1679	
		TYPE 209 (TYPE 1500) SSC	1680	
		ULA SSC	1681	
		TYPE 211 SSC	1682	
		VASTERGOETLAND SSC	1683	
		TYPE 206A SSC	1684	
		UNDEFINED	1685	THROUGH 1945
		SSA GENERAL	1946	
		BRAVO SSA	1947	
		DOLPHIN (AGSS) SSA	1948	
		GOLF I SSA	1949	
		GOLF I (MODIFIED) SSA	1950	
		GOLF II SSA	1951	
		INDIA SSA	1952	
		LIMA SSA	1953	
		ROMEO SSA	1954	
		ZULU SSA	1955	
		UNDEFINED	1956	THROUGH 4069
		SUBSURFACE SPECIFIC	4070	THROUGH 4094
		TYPE 1-25		
		RESET TO NO STATEMENT	4095	

810	001	LAND (GROUND) SPECIFIC TYPE		
-----	-----	-----------------------------	--	--

		NO STATEMENT	0	
		TOW	1	

THE SPECIFIC TYPE OF POINT OR TRACK
WITH AN ENVIRONMENT/CATEGORY OF
LAND (GROUND).

FIELD CODING FOR J15.0C1

(SHEET 72)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		DRAGON	2	
		LANCE	3	
		SHILLEAGH	4	
		SERGEANT	5	
		AMMUNITION	6	
		POL	7	
		OBSERVATION POSTS	8	
		RADIO DIRECTION FINDER	9	
		RIVER	10	
		STREAM	11	
		LAKE	12	
		MARSH/SWAMP	13	
		MOUNTAIN	14	
		HILLTOP	15	
		RIDGE	16	
		DEPRESSION	17	
		VALLEY	18	
		CAVE	19	
		BRIDGE	20	
		DAM	21	
		BUILDING	22	
		VILLAGE	23	
		TOWN	24	
		ROAD INTERSECTION	25	
		HOSPITAL	26	
		HAWK	27	
		I-HAWK	28	
		PATRIOT	29	
		NIKE	30	
		REDEYE	31	
		STINKER	32	
		HELLFIRE	33	
		PERSHING	34	
		JEEP	35	
		CAR	36	
		MOTORCYCLE	37	
		BICYCLE	38	
		AMPHIBIOUS VEHICLE	39	
		RIVER CROSSING EQUIPMENT	40	
		MECHANIZED MINE SWEEPER	41	
		MOBILE RADAR	42	
		SMOKE GENERATOR	43	

FIELD CODING FOR J15.0C1

(SHEET 73)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		(SSSB) SHIP SHORE SHIP BUFFER	44	
		(RADIL) ROCC AWACS DIGITAL INTERFACE LINK	45	
		(ASIT) ADAPTABLE SURFACE INTERFACE TERMINAL	46	
		(AEGIS) AEW GROUND INTERFACE SEGMENT	47	
		AMBULANCE	48	
		BIOLOGICAL WEAPONS	49	
		CHEMICAL WEAPONS	50	
		NUCLEAR WEAPONS	51	
		ENGINEER VEHICLES	52	
		GENERATOR	53	
		JAMMERS	54	
		MAINTENANCE VEHICLE	55	
		MULTIPLE ROCKET LAUNCHER	56	
		RADIO	57	
		REMOTE SENSOR	58	
		SELF PROPELLED ARTILLERY	59	
		TACTICAL BRIDGE	60	
		TOWED ARTILLERY GUN	61	
		RECOILLESS RIFLE	62	
		(TACCP) TACTICAL COMMAND POST	63	
		BRIGADE	64	
		CORPS	65	
		GROUP	66	
		DIVISION	67	
		REGIMENT	68	
		BATTALION	69	
		COMPANY	70	
		PLATOON	71	
		SQUADRON	72	
		AIRBASE	73	
		WING	74	
		ANTI-AIRCRAFT GUN	75	
		AIR DEFENSE ARTILLERY GUN	76	
		MORTAR	77	
		FLAMETHROWER	78	
		TSC/MOCC/MARITIME HEADQUARTERS	79	

FIELD CODING FOR J15.0C1

(SHEET 74)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		MAIN BATTLE TANK	80	
		MEDIUM TANK	81	
		LIGHT TANK	82	
		TRAIN	83	
		ARMORED PERSONNEL	84	
		VEHICLE		
		ARMORED INFANTRY	85	
		FIGHTING VEHICLE		
		LIGHT TRUCK	86	
		MEDIUM TRUCK	87	
		HEAVY TRUCK	88	
		TANK TRANSPORTER	89	
		DUMMY	90	
		TRAP	91	
		POINT TARGET	92	
		EA SITE	93	
		ARMORED PERSONNEL	94	
		CARRIER		
		ARMORED INFANTRY	95	
		FIGHTING VEHICLE		
		GCI SITE	96	
		CRC	97	
		TACC (AF)	98	
		CRP	99	
		TACC (MC)	100	
		MPC	101	
		TAOC	102	
		AADCCS (AN/TSQ-73)	103	
		DASC	104	
		FACP	105	
		FASC	106	
		AADCP	107	
		ASRT	108	
		NCC	109	
		RCC	110	
		ROCC	111	
		DC	112	
		WOC	113	
		(ASOC) AIR SUPPORT	114	
		OPERATIONS CENTER		
		(TCO) TACTICAL COMBAT	115	
		OPERATIONS CENTER		

FIELD CODING FOR J15.0C1

(SHEET 75)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE -----	(CONTINUED)	
		(TOC) TACTICAL OPERATIONS CENTER (ARMY)	116	
		CHAPPARAL	117	
		FIRE DIRECTION CENTER	118	
		FIRE UNIT	119	
		DIVARTY	120	
		BATTERY	121	
		SELF-PROPELLED ARTILLERY	122	
		(GOC) GROUND OPERATIONS CENTER	123	
		(ICC) INFORMATION COORDINATION CENTER	124	
		(BOC) BATTERY OPERATIONS CENTER	125	
		(ECS) ENGAGEMENT CONTROL STATION	126	
		(PCP) PLATOON COMMAND POST	127	
		(CRG) COMMUNICATIONS RELAY GROUP	128	
		TUNNELS	129	
		RAILYARDS	130	
		BENCHMARK	131	
		TROOP	132	
		LANDING ZONE	133	
		DROP ZONE	134	
		ASSEMBLY OR STAGING AREA	135	
		DECONTAMINATION SITE	136	
		RE-ENTRY POINT/LINE	137	
		CROSSING AREA FOR RECON PATROLS		
		SAM	138	
		SSM	139	
		ANTI-TANK WEAPON	140	
		DIRECT SUPPORT	141	
		GENERAL SUPPORT	142	
		INTERCEPTION	143	
		BLOCKING	144	
		REINFORCING	145	
		REDEPLOYMENT	146	
		POLICING	147	
		INTRUDING	148	

FIELD CODING FOR J15.0C1

(SHEET 76)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		PREPARING BARRIER	149	
		DUMPING EQUIPMENT	150	
		RELIEF	151	
		CONVOY	152	
		ANTI-AIRCRAFT	153	
		AIR DEFENSE ARTILLERY	154	
		ARTILLERY	155	
		SURVEILLANCE	156	
		PICKETING	157	
		LOGISTICS SUPPORT	158	
		SEARCH	159	
		DIRECT ARTILLERY SUPPORT	160	
		GENERAL ARTILLERY	161	
		SUPPORT		
		MAINTAINING LINE OF	162	
		COMMUNICATION		
		COMMITTING	163	
		COUNTER-ATTACK	164	
		ELECTRONIC WARFARE	165	
		THREATEN	166	
		DESTROY	167	
		CONTACT	168	
		EVALUATION	169	
		TRANSPORTER	170	
		ARMORED VEHICLE	171	
		GUN	172	
		HALF TRACK	173	
		COMMUNICATIONS EQUIPMENT	174	
		TARGET	175	
		AIR DEFENSE SITE	176	
		FIM-92 STINGER	177	
		NIM-23 HAWK	178	
		MIM-42 REDEYE	179	
		MIM-72 CHAPARRAL	180	
		MIM-104 PATRIOT	181	
		RIM-2 TERRIER	182	
		RIM-7 SEA SPARROW	183	
		RIM-8 TALOS	184	
		RIM-24 TARTAR	185	
		RIM-66 STANDARD MISSILE	186	
		RIM-67 STANDARD MISSILE	187	
		BLOWPIPE	188	
		DISUSED	189 THROUGH 190	

FIELD CODING FOR J15.0C1 (SHEET 77)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		SEA DART	191	
		DISUSED	192 THROUGH 193	
		CROTALE	194	
		RAPIER	195	
		RBS-70/GIRAFFE	196	
		SAM BLOODHOUND	197	
		SAM ROLAND	198	
		SA-2 GUIDELINE	199	
		SA-3 GOA	200	
		SA-4 GANEF	201	
		SA-N-3 GOBLET	202	
		SA-5 GAMMON	203	
		SA-N-4 GECKO	204	
		SA-6 GAINFUL	205	
		SA-N-6 GRUMBLE	206	
		SA-7 GRAIL	207	
		SA-8 GECKO	208	
		SA-9 GASKIN	209	
		SA-10 GRUMBLE	210	
		SA-11 GADFLY	211	
		SA-12	212	
		SA-13 GOPHER	213	
		MISTRAL	214	
		SA-N-7 GADFLY	215	
		SA-N-8 GREMLIN	216	
		SA-14 GREMLIN	217	
		SA-16 GIMLET	218	
		SA-X-17	219	
		TOC (THAAD)	220	
		SSI (THAAD)	221	
		LCS (THAAD)	222	
		LAUNCHER (THAAD)	223	
		TMD-GBR (THAAD)	224	
		JTAGS	225	
		ADTOC/BN	226	
		ADTOC/BDE	227	
		ADCP	228	
		SM-2 BLOCK II	229	
		SM-2 BLOCK III	230	
		SM-2 BLOCK IIIA	231	
		SM-2 BLOCK IIIB	232	
		SM-2 BLOCK IV	233	
		SM-2 BLOCK IVA	234	

FIELD CODING FOR J15.0C1

(SHEET 78)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		SM-3 LEAP	235	
		SA-N-5 GRAIL	236	
		SA-N-11 GRISOM	237	
		SA-12A GLADIATOR	238	
		SA-12B GIANT	239	
		SA-14 GREMLIN	240	
		SA-15 GAUNTLET	241	
		SA-17 GRIZZLY	242	
		SA-N-12 GRIZZLY	243	
		SA-18 GROUSE	244	
		SA-19 GRISOM	245	
		RIM-116 RAM	246	
		ADATS	247	
		JAVELIN	248	
		STARBURST	249	
		STARSTREAK	250	
		ASPIDE	251	
		FRONT DOOR	252	
		ROLAND II	253	
		AKASH	254	
		ANZA	255	
		ANZA II	256	
		CSA-1	257	
		CSA-2	258	
		CSA-4	259	
		CSA-5	260	
		FM-80	261	
		HN-5	262	
		NK-7	263	
		NK-16	264	
		PANTZYR	265	
		RAPIER 2000/JERNAS	266	
		RBS-90	267	
		SAKR	268	
		SAVA	269	
		SHANINE	270	
		SKYGUARD ASPIDE	271	
		SPADA	272	
		TAM SAM	273	
		TIGERCAT	274	
		VANGUARD	275	
		SA-N-1 GOA	276	
		SA-N-9 GAUNTLET	277	

FIELD CODING FOR J15.0C1

(SHEET 79)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE	(CONTINUED)	

		SA-N-10	278	
		ALBATROS/ASPIDE	279	
		SM-1	280	
		SA-2 IRAQ MOD	281	
		SA-2 NORTH KOREA RO	282	
		AEGIS-TI	283	
		MASURGS	284	
		ROCK CAKE	285	
		SEA INDIGO	286	
		TANSAM	287	
		TOKEN A/D	288	
		GUARDSMAN	289	
		SILKWORM	290	
		SNOW DRIFT 11/17	291	
		TIGER S	292	
		TIGER G	293	
		TUBE ARM SA-11	294	
		SEACAT 262/903/904	295	
		AN/MPQ-4	296	
		AN-TPQ-36	297	
		AN/TPS-25	298	
		CYMBERLINE	299	
		PORK TROUGH 1	300	
		RASIT	301	
		SNAR-6	302	
		TALL MIKE	303	
		AN/FPN-33/36/40	304	
		AN/TPN-12/17	305	
		CPN-4, FPN-16/22	306	
		RP-2E	307	
		RP-4G	308	
		THD-1010/1013	309	
		TPN-8/14/18TSQ-7	310	
		TWO SPOT	311	
		CSA-X-2	312	
		ASR-0	313	
		FALCON-G	314	
		MARCON LN66TPS66	315	
		SHEET BEND	316	
		WALL RUST A/B	317	
		DON-2	318	
		DONKAY/PALM FROND	319	
		EYE SHIELD	320	

FIELD CODING FOR J15.0C1

(SHEET 80)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE -----	(CONTINUED)	
		MARELD	321	
		PEEL PAIR	322	
		POT HEAD	323	
		RACAL-DECCA	324	
		RICE FIELD	325	
		RICE SCREEN	326	
		RICE CUP	327	
		SQUARE TIE	328	
		SS-N-2	329	
		STRUT CURVE	330	
		STRUT PAIR	331	
		BOFI	332	
		CORN CAN	333	
		DRUM TILT	334	
		ELDORADO	335	
		FLAP WHEEL	336	
		FLEDERMAUS	337	
		FLYCATCHER	338	
		GEPARD	339	
		GUN DISH	340	
		SPAAMG	341	
		TEAMPLAY	342	
		TEAMWORK	343	
		VULCAN	344	
		9LV 200	345	
		AN/SPG-50	346	
		BASS TILT	347	
		GOALKEEPER	348	
		HAWK SCREECH	349	
		KITE SCREECH A/B	350	
		OWL SCREECH	351	
		MARK 68 FCS	352	
		MK 57/63 GFCS	353	
		MK-86 GFCS	354	
		MUFF COB	355	
		SIGNAAL STIR 180	356	
		SUN VISOR	357	
		TOP BOW	358	
		TYPE 341	359	
		VEGA	360	
		WM-20 SERIES	361	
		MARCONI S613	362	
		THIN SKIN	363	

FIELD CODING FOR J15.0C1

(SHEET 81)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE -----	(CONTINUED)	
		AN/FPS-77	364	
		MRL-1	365	
		MRL-4/5	366	
		BIG BIRD	367	
		SIDE NET	368	
		ODD LOT/PAIR/GROUP	369	
		FIRE WHEEL/MOD	370	
		BARLOCK	371	
		FIRECAN/WHIFF	372	
		GIN SLING	373	
		FRUSKA GORA	374	
		TIN SHIELD	375	
		BIG BAR/MESH	376	
		SS-N-S SCOOP PAIR	377	
		SGR-105 DA-01/00	378	
		CROSS SLOT	379	
		BACK NET/TRAP	380	
		GATE POLE/HIGH/POST	381	
		TOP LOT	382	
		RICE CAKE	383	
		JY-14/9	384	
		TIN TRAP	385	
		HEAD NET A/B/C	386	
		SLIM/SEA/HAIR NET	387	
		LOW SIEVE	388	
		EGG CUP	389	
		CUT WEB	390	
		SKYWATCH	391	
		HALF PLATE	392	
		SKIN HEAD	393	
		SIEVE FAMILY	394	
		SO-A	395	
		HIGH SHELL	396	
		AN/FPS-6/89	397	
		DECCA HF200	398	
		MARCONI 5244	399	
		TYPE 88 MK 1	400	
		MARCONI S-247	401	
		AN/MPN-11	402	
		RAT-31S	403	
		AA4 MK 6/7	404	
		AN/TPS-43	405	
		SCR-584	406	

FIELD CODING FOR J15.0C1

(SHEET 82)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
810	001	LAND (GROUND) SPECIFIC TYPE -----	(CONTINUED)	
		AN/TPS-48	407	
		MARCONI S-1006/269	408	
		PALMIER	409	
		FIREFINDER LR	410	
		VOLEX III/IV	411	
		THD-1940	412	
		HADR (HR-3000)	413	
		AN/RPS-70/72/75	414	
		MPDR-18/S	415	
		WATCHMAN	416	
		MARCONI S-631/647	417	
		MARCONI S-706/711/712	418	
		AN/TPS-73	419	
		TRS-22XX	420	
		AN/SPS-8	421	
		DECCA AWS-1	422	
		MK-26	423	
		AN/SPS-48	424	
		RAN-7S	425	
		SEA TIGER	426	
		DA-08/2LS	427	
		AWS-9 (TYPE 996)	428	
		DA-05/00	429	
		MPDR-45	430	
		TOP STEER/PLATE	431	
		STRIKE OUT	432	
		SPONGE CAKE	433	
		NC1 ROLAND	434	
		NC1 MISTRAL	435	
		FDOC	436	
		MCT	437	
		CETAC	438	
		ISARD	439	
		UNDEFINED	440 THROUGH 4000	
		WAYPOINT	4001	
		STRIKE INITIAL POINT	4002	
		UNDEFINED	4003 THROUGH 4093	
		RESET TO NO STATEMENT	4094	
		UNDEFINED	4095	
275	004	ENVIRONMENT/CATEGORY -----		IDENTIFIES THE ENVIRONMENT/CATEGORY OF A JTIDS/MIDS UNIT OR TRACK.
		NO STATEMENT/UNKNOWN	0	

5.3-711

MIL-STD-6016B

FIELD CODING FOR J15.0C1 (SHEET 83)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
275	004	ENVIRONMENT/CATEGORY	(CONTINUED)	

		SPACE	1	
		AIR	2	
		SURFACE (MARITIME)	3	
		SUBSURFACE (MARITIME)	4	
		LAND (GROUND)	5	
		UNDEFINED	6 THROUGH 7	

TABLE J17-1. J17 Miscellaneous Word Applicability Table

INITIAL WORD	SUBLABEL							
	J17.0I WEATHER OVER TARGET							
EXTENSION WORD - 0	J17.0E0							
1								
CONTINUATION WORD - 0								
1								
2								
3								
4								
5								
6								
...								
...								
31								

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

J17.0 MESSAGE SUMMARY

PURPOSE

The J17.0 Weather Over Target message provides the current weather conditions over a target area.

DATA ELEMENT SUMMARY

<u>J17.0I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
VISIBILITY	7
CLOUD COVER, 1	2
CLOUD HEIGHT, 1	6
TRACK NUMBER, OBJECTIVE	19
ORIGIN OF INDEX NUMBER	1
INDEX NUMBER	6
SPARE	16

<u>J17.0E0</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
QNH	7
WIND SPEED	7
WIND DIRECTION	7
MINUTE	6
HOURL	5
SPARE	36

MIL-STD-6016B

J17.0 TRANSMIT/RECEIVE RULES

TITLE: Weather Over Target Message

TRANSMIT RULES

JU platforms shall transmit the J17.0I/J17.0E0 Weather Over Target message twice, at RRN = 6 (12 seconds, 8-20 second interval), when tactically significant information is available or when previously reported data is altered.

RECEIVE RULES

There are no receive rules for this message.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: WEATHER OVER TARGET INITIAL WORD

	24	23:	21	20:	19	18	17	16	15	14	13:	12	11	10:	09	08	07:	06	05	04	03	02:	01	00
<---	:	CC1	:								:	MESSAGE	:	SUBLABEL,	:							:	WORD	:
	:		:								:	LENGTH	:	J-SERIES	:							:	FORMAT	:
	:		:								:	INDICATOR	:		:							:		:
	:	2	:					7			:	3	:		3	:			5			:	2	:

	49	48:	47:	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28:	28	27	26	25
<---	:	ORG:																				:				
	:	INX:																				:	CLOUD HEIGHT, 1			
	:	:																				:				
	:	1 :												19								:			6	

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	:	53	52	51	50
:																	:				
:	SPARE																:	INDEX NUMBER			
:																	:				
:	16																:	6			

WORD DESCRIPTION

WORD NUMBER: J17.0I

WORD TITLE: WEATHER OVER TARGET INITIAL WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	00
270 004	LABEL, J-SERIES	2-	6 5	10001
271 005	SUBLABEL, J-SERIES	7-	9 3	000
800 001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
757 013	VISIBILITY	13-	19 7	
775 003	CLOUD COVER, 1 (CC1)	20-	21 2	
365 025	CLOUD HEIGHT, 1	23-	28 6	
769 010	TRACK NUMBER, OBJECTIVE	28-	46 19	
1864 001	ORIGIN OF INDEX NUMBER (ORG INX)	47	1	
768 002	INDEX NUMBER	48-	53 6	
756 016	SPARE	54-	69 16	

FIELD CODING FOR J17.0I

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
757	013	VISIBILITY -----		IN 100 METER INCREMENTS.
		0 THROUGH 12,500 METERS	0 THROUGH 125	IN 100 METER INCREMENTS.
		OVER 12,500 METERS	126	
		NO STATEMENT	127	
775	003	CLOUD COVER, 1 -----		
		SKY CLEAR	0	FIELD NOT INTERPRETED IF THE CORRESPONDING CLOUD HEIGHT IS SET TO A VALUE OTHER THAN 1 THROUGH 61. SKY CLEAR IS DEFINED AS LESS THAN 1 OKTA (OR LESS THAN 0.1 SKY COVER).
		SCATTERED	1	1-4 OKTAS (0.1 THROUGH 0.5 SKY COVER).
		BROKEN	2	5-7 OKTAS (0.6 THROUGH 0.9 SKY COVER).
		OVERCAST	3	8 OKTAS (MORE THAN 0.9 SKY COVER).
365	025	CLOUD HEIGHT, 1 -----		
		NO STATEMENT	0	
		100 THROUGH 6000 FEET	1 THROUGH 60	HEIGHT OF CLOUD BASE IN 100 FEET INCREMENTS.
		OVER 6000 FEET	61	
		UNDEFINED	62	
		SKY OBSCURED	63	
769	010	TRACK NUMBER, OBJECTIVE -----		THE TN OF THE OBJECT OF THE ACTION DESCRIBED IN THE MESSAGE. THE NINETEEN BITS OF THIS TN ARE DIVIDED INTO FIVE GROUPS CONSISTING OF TWO FIVE-BIT GROUPS AND THREE THREE-BIT GROUPS. EACH FIVE-BIT GROUP REPRESENTS AN ALPHANUMERIC CHARACTER OF EITHER AN ALPHA CHARACTER OF A THROUGH Z (EXCLUDING THE ALPHA CHARACTERS I AND O) OR A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. EACH THREE- BIT GROUP REPRESENTS A NUMERIC CHARACTER OF ZERO THROUGH SEVEN. THEREFORE, ANY TN CAN BE REPRESENTED BY AANN WHERE A IS AN

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	010	TRACK NUMBER, OBJECTIVE -----	(CONTINUED)	

ALPHANUMERIC CHARACTER CODED WITH FIVE BITS AND N IS A NUMERIC CHARACTER CODED WITH THREE BITS. CODING FOR A FIVE BIT ALPHANUMERIC CHARACTER IS SHOWN BELOW. CODING FOR A THREE BIT NUMERIC CHARACTER IS EXACTLY THE SAME AS ZERO THROUGH SEVEN OF THE FIVE BIT ALPHANUMERIC CHARACTER WITH THE FIRST TWO LEADING ZEROES DELETED.

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6
00111	7
01000	A
01001	B
01010	C
01011	D
01100	E
01101	F
01110	G
01111	H
10000	J
10001	K
10010	L
10011	M
10100	N
10101	P
10110	Q
10111	R
11000	S
11001	T
11010	U
11011	V
11100	W
11101	X
11110	Y

FIELD CODING FOR J17.0I

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	010	TRACK NUMBER, OBJECTIVE -----	(CONTINUED)	
		00000	0	11111 Z NO STATEMENT.
		00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		00077	63	ILLEGAL.
		00100-00175	64 THROUGH 125	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		00176	126	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		00177	127	COLLECTIVE ADDRESS.
		00200-07776	128 THROUGH 4094	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		07777	4095	ILLEGAL.
		0A000-0Z777	4096 THROUGH 16383	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		10000-17777	16384 THROUGH 20479	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		1A000-1Z777	20480 THROUGH 32767	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		20000-27777	32768 THROUGH 36863	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.

FIELD CODING FOR J17.0I

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	010	TRACK NUMBER, OBJECTIVE -----	(CONTINUED)	
		3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		5A000-5Z777	86016 THROUGH 98303	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		60000-67777	98304 THROUGH 102399	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		6A000-6Z777	102400 THROUGH 114687	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		70000-77776	114688 THROUGH 118782	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		77777	118783	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
		7A000-ZZ777	118784 THROUGH 524287	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.

FIELD CODING FOR J17.0I (SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1864	001	ORIGIN OF INDEX NUMBER -----		
		MESSAGE ORIGINATOR'S INDEX NUMBER	0	
		MESSAGE RECEIVER'S INDEX NUMBER	1	
768	002	INDEX NUMBER -----		
		NO STATEMENT NUMERIC	0 1 THROUGH 63	A VALUE ASSIGNED BY THE ORIGINATOR TO DIFFERENTIATE AMONG SENSOR TARGET REPORTS.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: WEATHER OVER TARGET EXTENSION WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00
<--- : : : WIND DIRECTION : : WIND SPEED : : QNH : : WORD : : FORMAT :																								
: 7 : 7 : 7 : 2 :																								

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	:	33	32	31	30	29	:	28	27	26	25
<---																:	HOUR				:	MINUTE				
																:	5				:	6				

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50
:																				
:																				
:											SPARE									
:																				
:											36									

WORD DESCRIPTION

WORD NUMBER: J17.0E0

WORD TITLE: WEATHER OVER TARGET EXTENSION WORD

REFERENCE		BIT #		RESOLUTION, CODING, ETC
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	
1550 001	WORD FORMAT	0-	1 2	10
789 001	QNH	2-	8 7	
367 012	WIND SPEED	9-	15 7	
371 003	WIND DIRECTION	16-	22 7	
797 004	MINUTE	23-	28 6	
792 001	HOUR	29-	33 5	
756 036	SPARE	34-	69 36	

FIELD CODING FOR J17.0E0

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
789	001	QNH ---		ALTIMETER SET TO READ ZERO AT MEAN SEA LEVEL.
		NO STATEMENT	0	
		950 THROUGH 1050 HECTOPASCALS	1 THROUGH 101	IN 1 HECTOPASCAL INCREMENTS.
		ILLEGAL	102 THROUGH 127	
367	012	WIND SPEED -----		EXPRESSES THE SPEED OF THE WIND IN KNOTS.
		0 THROUGH 125 KNOTS	0 THROUGH 125	IN 1 KNOT INCREMENTS.
		OVER 125 KNOTS	126	
		NO STATEMENT	127	
371	003	WIND DIRECTION -----		THE DIRECTION FROM WHICH THE WIND IS BLOWING IN RELATION TO TRUE NORTH.
		NO STATEMENT	0	
		005 THROUGH 360 DEGREES	1 THROUGH 72	IN 5 DEGREE INCREMENTS.
		VARIABLE	73	
		ILLEGAL	74 THROUGH 127	
797	004	MINUTE -----		THE MINUTE OF THE HOUR.
		0 THROUGH 59	0 THROUGH 59	IN ONE MINUTE INCREMENTS.
		ILLEGAL	60 THROUGH 62	
		NO STATEMENT	63	
792	001	HOUR ----		EXPRESSES TIME OF DAY OR A PERIOD OF TIME IN HOURS.
		0 HOUR	0	
		1 THROUGH 23 HOURS	1 THROUGH 23	IN ONE HOUR INCREMENTS.
		ILLEGAL	24 THROUGH 30	
		NO STATEMENT	31	

TABLE J28-1. J28 National Use Word Applicability Table

INITIAL WORD	SUBLABEL								
	J28.0I U.S. NATIONAL 1 (ARMY)	J28.1I U.S. NATIONAL 2 (NAVY)	J28.2I U.S. NATIONAL 3 (AIR FORCE)	J28.20I TEXT	J28.3I U.S. NATIONAL 4 (MARINE CORPS)	J28.4I FR NATIONAL 1	J28.5I FR NATIONAL 2	J28.6I U.S. NATIONAL 5 (NSA)	J28.7I U.K. NATIONAL 1
EXTENSION WORD - 0				J28.20E0					
CONTINUATION WORD - 0									
...									
...									
...									
...									
...									
...									
...									
31									

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

J28.0 MESSAGE SUMMARY

PURPOSE

The J28.0 U.S. National 1 (Army) message purpose is specified in the appropriate U.S. Army documentation.

DATA ELEMENT SUMMARY

<u>J28.0I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
PROPRIETARY INFORMATION	57

MIL-STD-6016B

J28.0 TRANSMIT/RECEIVE RULES

TITLE: U.S. National 1 (Army)

TRANSMIT RULES

The transmit rules are specified in the appropriate U.S. Army documentation.

RECEIVE RULES

The receive rules are specified in the appropriate U.S. Army documentation.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J28.0I

WORD TITLE: U.S. NATIONAL 1 (ARMY) INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00			
												:	MESSAGE	:	SUBLABEL,	:									:	WORD	:
<---												:	LENGTH	:	J-SERIES	:	LABEL, J-SERIES				:	FORMAT	:				:
												:	INDICATOR	:									:			:	
												:	3	:	3	:	5				:	2	:				:

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

PROPRIETARY INFORMATION

57																									

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50								
:																					--->							
:																												
:																												
:																												

WORD DESCRIPTION

WORD NUMBER: J28.0I

WORD TITLE: U.S. NATIONAL 1 (ARMY) INITIAL WORD

REFERENCE		BIT #		RESOLUTION, CODING, ETC
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	
1550 001	WORD FORMAT	0-	1 2	00
270 004	LABEL, J-SERIES	2-	6 5	11100
271 005	SUBLABEL, J-SERIES	7-	9 3	000
800 001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
1744 001	PROPRIETARY INFORMATION	13-	69 57	SPECIFIED IN THE APPROPRIATE U.S. ARMY DOCUMENTATION.

FIELD CODING FOR J28.0I (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1744	001	PROPRIETARY INFORMATION -----		INFORMATION RESERVED FOR THE EXCLUSIVE USE OF A SERVICE/NATION. DATA ITEM NAMES, BIT CODING, AND EXPLANATIONS ARE SPECIFIED IN THE APPROPRIATE SERVICE/NATION DOCUMENTATION.

MIL-STD-6016B

J28.1 MESSAGE SUMMARY

PURPOSE

The J28.1 U.S. National 2 (Navy) message purpose is specified in the appropriate U.S. Navy documentation.

DATA ELEMENT SUMMARY

<u>J28.1I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
PROPRIETARY INFORMATION	57

MIL-STD-6016B

J28.1 TRANSMIT/RECEIVE RULES

TITLE: U.S. National 2 (Navy)

TRANSMIT RULES

The transmit rules are specified in the appropriate U.S. Navy documentation.

RECEIVE RULES

The receive rules are specified in the appropriate U.S. Navy documentation.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J28.1I

WORD TITLE: U.S. NATIONAL 2 (NAVY) INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00								
												:	MESSAGE	:	SUBLABEL,	:						:	WORD	:								
<---												:	LENGTH	:	J-SERIES	:	LABEL, J-SERIES					:	FORMAT	:								
												:	INDICATOR	:																:		:
												:	3	:	3	:	5					:	2	:								

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

PROPRIETARY INFORMATION

57

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50
:																				
:																				
:																				
:																				

--->

WORD DESCRIPTION

WORD NUMBER: J28.1I

WORD TITLE: U.S. NATIONAL 2 (NAVY) INITIAL WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	00
270 004	LABEL, J-SERIES	2-	6 5	11100
271 005	SUBLABEL, J-SERIES	7-	9 3	001
800 001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
1744 001	PROPRIETARY INFORMATION	13-	69 57	SPECIFIED IN THE APPROPRIATE U.S. NAVY DOCUMENTATION.

FIELD CODING FOR J28.1I (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1744	001	PROPRIETARY INFORMATION -----		INFORMATION RESERVED FOR THE EXCLUSIVE USE OF A SERVICE/NATION. DATA ITEM NAMES, BIT CODING, AND EXPLANATIONS ARE SPECIFIED IN THE APPROPRIATE SERVICE/NATION DOCUMENTATION.

MIL-STD-6016B

J28.2 MESSAGE SUMMARY

PURPOSE

The J28.2 U.S. National 3 (Air Force) message purpose is specified in the appropriate U.S. Air Force documentation.

DATA ELEMENT SUMMARY

<u>J28.2I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
PROPRIETARY INFORMATION	57

MIL-STD-6016B

J28.2 TRANSMIT/RECEIVE RULES

TITLE: U.S. National 3 (Air Force)

TRANSMIT RULES

The transmit rules are specified in the appropriate U.S. Air Force documentation.

RECEIVE RULES

The receive rules are specified in the appropriate U.S. Air Force documentation.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J28.2I

WORD TITLE: U.S. NATIONAL 3 (AIR FORCE) INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00			
												:	MESSAGE	:	SUBLABEL,	:									:	WORD	:
<---												:	LENGTH	:	J-SERIES	:	LABEL, J-SERIES				:	FORMAT	:				:
												:	INDICATOR	:									:				:
												:	3	:	3	:	5				:	2	:				:

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

PROPRIETARY INFORMATION

57																									

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50								
:																					--->							
:																												
:																												
:																												

WORD DESCRIPTION

WORD NUMBER: J28.2I

WORD TITLE: U.S. NATIONAL 3 (AIR FORCE) INITIAL WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	00
270 004	LABEL, J-SERIES	2-	6 5	11100
271 005	SUBLABEL, J-SERIES	7-	9 3	010
800 001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
1744 001	PROPRIETARY INFORMATION	13-	69 57	SPECIFIED IN THE APPROPRIATE U.S. AIR FORCE DOCUMENTATION.

FIELD CODING FOR J28.2I (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1744	001	PROPRIETARY INFORMATION -----		INFORMATION RESERVED FOR THE EXCLUSIVE USE OF A SERVICE/NATION. DATA ITEM NAMES, BIT CODING, AND EXPLANATIONS ARE SPECIFIED IN THE APPROPRIATE SERVICE/NATION DOCUMENTATION.

MIL-STD-6016B

J28.20 MESSAGE SUMMARY

PURPOSE

The J28.20 Text message provides the means to convey alphanumeric text information via datalink.

DATA ELEMENT SUMMARY

<u>J28.20I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
AF PROPRIETARY FORMAT	5
SPARE	3
MESSAGE NUMBER	8
MESSAGE COUNT	8
TRACK NUMBER, ADDRESSEE	15
CHARACTER #1	6
CHARACTER #2	6
SPARE	6

<u>J28.20E0</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
CHARACTER #3	6
CHARACTER #4	6
CHARACTER #5	6
CHARACTER #6	6
CHARACTER #7	6
CHARACTER #8	6
CHARACTER #9	6
CHARACTER #10	6
SPARE	2
CHARACTER #11	6
CHARACTER #12	6
CHARACTER #13	6

MIL-STD-6016B

J28.20 TRANSMIT/RECEIVE RULES

TITLE: Text Message

TRANSMIT RULES

1. A Text report consists of 1 to 240 J28.20 Text messages (containing up to 13,680 characters of text (i.e., 240 messages of 57 characters per message)).
2. A J28.20 Text message may consist of a J28.20 Initial word with either 2 (Standard Packing) or 5 (Packed-2 or Packed-4) Extension words, with the exception of the last or only message of a report. In the case of the last or only message of a report, only the number of words necessary (i.e., the initial word with 0 to 5 Extension words) to convey the useful (non-blank) text data shall be transmitted. If the text data ends before the last character location in the Initial or Extension word being filled is reached, the additional character locations in that word shall be filled with blanks.

RECEIVE RULES

1. Text messages are separated by their Source Track Number.
2. Reception is complete when the Message Number field equals the Message Count field or when 96 seconds have elapsed since reception of the last Text message received from that Source Track Number.
3. If the received report is incomplete, the received message shall be filled with a special character to indicate incomplete data reception. The number of special characters inserted shall equal the lost data as evidenced by the gap in the Message Numbers. The selected fill character shall be a character not contained in the Text character set.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: TEXT INITIAL WORD

24	23	22	21:	20	19	18:	17	16	15	14	13:	12	11	10:	09	08	07:	06	05	04	03	02:	01	00:		
<---			:	SPARE			:	AF PROPRIETARY FORMAT			:	MESSAGE LENGTH INDICATOR			:	SUBLABEL, J-SERIES			:	LABEL, J-SERIES			:	WORD FORMAT		:
			:	3			:	5			:	3			:	3			:	5			:	2		:

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
TRACK NUMBER, ADDRESSEE													:	MESSAGE COUNT							:	MESSAGE NUMBER		
15													:	8							:	8		

:	69	68	67	66	65	64:	63	62	61	60	59	58:	57	56	55	54	53	52:	51	50			
:						:						:						:					
:	SPARE					:	CHARACTER #2					:	CHARACTER #1					:	--->				
:	6					:	6					:	6					:					

WORD DESCRIPTION

WORD NUMBER: J28.20I
WORD TITLE: TEXT INITIAL WORD

REFERENCE DFI/DUI	DATA FIELD DESCRIPTOR	BIT #		RESOLUTION, CODING, ETC
		POSITION	BITS	
1550 001	WORD FORMAT	0-	1 2	00
270 004	LABEL, J-SERIES	2-	6 5	11100
271 005	SUBLABEL, J-SERIES	7-	9 3	010
800 001	MESSAGE LENGTH INDICATOR	10-	12 3	
1743 001	AF PROPRIETARY FORMAT	13-	17 5	0
756 003	SPARE	18-	20 3	
800 002	MESSAGE NUMBER	21-	28 8	
800 003	MESSAGE COUNT	29-	36 8	
769 006	TRACK NUMBER, ADDRESSEE	37-	51 15	
1851 001	CHARACTER #1	52-	57 6	
1851 002	CHARACTER #2	58-	63 6	SAME CODING AS BITS 52-57.
756 006	SPARE	64-	69 6	

FIELD CODING FOR J28.20I

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1743	001	AF PROPRIETARY FORMAT ----- TEXT MESSAGE ILLEGAL	0 1 THROUGH 31	AIR FORCE SPECIFIES THE DATA FORMAT USED IN CONVEYING THE INFORMATION IN PROPRIETARY USE MESSAGES.
800	002	MESSAGE NUMBER ----- NO STATEMENT NUMERIC ILLEGAL	0 1 THROUGH 240 241 THROUGH 255	SEQUENCE NUMBER OF THIS MESSAGE IN A TEXT REPORT.
800	003	MESSAGE COUNT ----- NO STATEMENT NUMERIC ILLEGAL	0 1 THROUGH 240 241 THROUGH 255	TOTAL NUMBER OF MESSAGES IN A TEXT REPORT.
769	006	TRACK NUMBER, ADDRESSEE ----- NO STATEMENT NUMERIC ILLEGAL NUMERIC NUMERIC ILLEGAL NUMERIC NUMERIC	0 00001 THROUGH 00076 (OCTAL) 00077 (OCTAL) 00100 THROUGH 00175 (OCTAL) 00176 (OCTAL) 00177 (OCTAL) 00200 THROUGH 07776 (OCTAL) 07777 (OCTAL) 10000 THROUGH 77776 (OCTAL) 77777 (OCTAL)	THE TN OF A UNIT (I.E., JU OR PU) TO WHICH A MESSAGE IS ADDRESSED. ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU). ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU). RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS. COLLECTIVE ADDRESS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS. ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
1851	001	CHARACTER #1 -----		CHARACTER IN A TEXT MESSAGE. DEFINED AS A STANDARDS CODE FOR

FIELD CODING FOR J28.20I (SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1851	001	CHARACTER #1 -----	(CONTINUED)	
				GENERAL APPLICATION USE FOR COMMUNICATING FIXED OR VARIABLE FORMAT CHARACTER DATA.
		@	0	
		A-Z	1 THROUGH 26	
		[	27	
		\	28	
		]	29	
		^	30	
		_	31	
		(SPACE)	32	BLANK/NO STATEMENT.
		!	33	
		"	34	
		#	35	
		\$	36	
		%	37	
		&	38	
		'	39	APOSTROPHE.
		(	40	
		)	41	
		*	42	
		+	43	
		,	44	COMMA.
		-	45	
		.	46	
		/	47	
		0-9	48 THROUGH 57	
		:	58	
		;	59	
		<	60	
		=	61	
		>	62	
		?	63	

WORD MAP

WORD NUMBER: J28.20E0

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00	:
CHARACTER #6					:	CHARACTER #5					:	CHARACTER #4					:	CHARACTER #3					:	WORD	:
					:						:						:						:	FORMAT	:
6					:	6					:	6					:	6					:	2	:

:	49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25	:
:	CHARACTER #10					:	CHARACTER #9					:	CHARACTER #8					:	CHARACTER #7					:	----	:
:						:						:						:						:		:
:	6					:	6					:	6					:	6					:		:

:	69	68	67	66	65	64:	63	62	61	60	59	58:	57	56	55	54	53	52:	51	50:				
:	CHARACTER #13						:	CHARACTER #12						:	CHARACTER #11						:	SP		:
:							:							:							:			:
:	6						:	6						:	6						:	2		:

WORD DESCRIPTION

WORD NUMBER: J28.20E0

REFERENCE DFI/DUI	DATA FIELD DESCRIPTOR	BIT #		RESOLUTION, CODING, ETC
		POSITION	BITS	
1550 001	WORD FORMAT	0- 1	2	10
1851 003	CHARACTER #3	2- 7	6	SEE CHARACTER #1.
1851 004	CHARACTER #4	8- 13	6	SAME CODING AS BITS 2-7.
1851 005	CHARACTER #5	14- 19	6	SAME CODING AS BITS 2-7.
1851 006	CHARACTER #6	20- 25	6	SAME CODING AS BITS 2-7.
1851 007	CHARACTER #7	26- 31	6	SAME CODING AS BITS 2-7.
1851 008	CHARACTER #8	32- 37	6	SAME CODING AS BITS 2-7.
1851 009	CHARACTER #9	38- 43	6	SAME CODING AS BITS 2-7.
1851 010	CHARACTER #10	44- 49	6	SAME CODING AS BITS 2-7.
756 002	SPARE (SP)	50- 51	2	
1851 011	CHARACTER #11	52- 57	6	SAME CODING AS BITS 2-7.
1851 012	CHARACTER #12	58- 63	6	SAME CODING AS BITS 2-7.
1851 013	CHARACTER #13	64- 69	6	SAME CODING AS BITS 2-7.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

J28.3 MESSAGE SUMMARY

PURPOSE

The J28.3 U.S. National 4 (Marine Corps) message purpose is specified in the appropriate U.S. Marine Corps documentation.

DATA ELEMENT SUMMARY

<u>J28.3I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
PROPRIETARY INFORMATION	57

MIL-STD-6016B

J28.3 TRANSMIT/RECEIVE RULES

TITLE: U.S. National 4 (Marine Corps)

TRANSMIT RULES

The transmit rules are specified in the appropriate U.S. Marine Corps documentation.

RECEIVE RULES

The receive rules are specified in the appropriate U.S. Marine Corps documentation.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J28.3I

WORD TITLE: U.S. NATIONAL 4 (MARINE CORPS) INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00		
												:	MESSAGE	:	SUBLABEL,	:						:	WORD	:		
<---												:	LENGTH	:	J-SERIES	:	LABEL, J-SERIES					:	FORMAT	:		
												:	INDICATOR	:						:						:
												:	3	:	3	:	5					:	2	:		

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

PROPRIETARY INFORMATION

57

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50
:																				
:																				
:																				
:																				

--->

WORD DESCRIPTION

WORD NUMBER: J28.3I

WORD TITLE: U.S. NATIONAL 4 (MARINE CORPS) INITIAL WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	00
270 004	LABEL, J-SERIES	2-	6 5	11100
271 005	SUBLABEL, J-SERIES	7-	9 3	011
800 001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
1744 001	PROPRIETARY INFORMATION	13-	69 57	SPECIFIED IN THE APPROPRIATE U.S. MARINE CORPS DOCUMENTATION.

FIELD CODING FOR J28.3I (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1744	001	PROPRIETARY INFORMATION -----		INFORMATION RESERVED FOR THE EXCLUSIVE USE OF A SERVICE/NATION. DATA ITEM NAMES, BIT CODING, AND EXPLANATIONS ARE SPECIFIED IN THE APPROPRIATE SERVICE/NATION DOCUMENTATION.

MIL-STD-6016B

J28.4 MESSAGE SUMMARY

PURPOSE

The J28.4 FR National 1 message purpose is specified in the appropriate French documentation.

DATA ELEMENT SUMMARY

<u>J28.4I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
PROPRIETARY INFORMATION	57

MIL-STD-6016B

J28.4 TRANSMIT/RECEIVE RULES

TITLE: FR National 1

TRANSMIT RULES

The transmit rules are specified in the appropriate French documentation.

RECEIVE RULES

The receive rules are specified in the appropriate French documentation.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J28.4I

WORD TITLE: FR NATIONAL 1 INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00	:		
<---												:	MESSAGE	:	SUBLABEL,	:									:	WORD	:
												:	LENGTH	:	J-SERIES	:	LABEL, J-SERIES				:	FORMAT	:				:
												:	INDICATOR	:									:				:
												:	3	:	3	:	5				:	2	:				:

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

PROPRIETARY INFORMATION

57																									

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				

WORD DESCRIPTION

WORD NUMBER: J28.4I
WORD TITLE: FR NATIONAL 1 INITIAL WORD

REFERENCE		BIT #		RESOLUTION, CODING, ETC
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	
1550 001	WORD FORMAT	0-	1 2	00
270 004	LABEL, J-SERIES	2-	6 5	11100
271 005	SUBLABEL, J-SERIES	7-	9 3	100
800 001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
1744 001	PROPRIETARY INFORMATION	13-	69 57	SPECIFIED IN THE APPROPRIATE FRENCH DOCUMENTATION.

FIELD CODING FOR J28.4I (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1744	001	PROPRIETARY INFORMATION -----		INFORMATION RESERVED FOR THE EXCLUSIVE USE OF A SERVICE/NATION. DATA ITEM NAMES, BIT CODING, AND EXPLANATIONS ARE SPECIFIED IN THE APPROPRIATE SERVICE/NATION DOCUMENTATION.

MIL-STD-6016B

J28.5 MESSAGE SUMMARY

PURPOSE

The J28.5 FR National 2 message purpose is specified in the appropriate French documentation.

DATA ELEMENT SUMMARY

<u>J28.5I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
PROPRIETARY INFORMATION	57

MIL-STD-6016B

J28.5 TRANSMIT/RECEIVE RULES

TITLE: FR National 2

TRANSMIT RULES

The transmit rules are specified in the appropriate French documentation.

RECEIVE RULES

The receive rules are specified in the appropriate French documentation.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J28.5I

WORD TITLE: FR NATIONAL 2 INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00	:
												:	MESSAGE	:	SUBLABEL,	:							:	WORD	:
<---												:	LENGTH	:	J-SERIES	:	LABEL,	J-SERIES	:	FORMAT	:			:	
												:	INDICATOR	:		:							:		:
												:	3	:	3	:	5	:	2	:			:		:

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

PROPRIETARY INFORMATION

57																							

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50
:																				
:																				
:																				
:																				

--->

WORD DESCRIPTION

WORD NUMBER: J28.5I
WORD TITLE: FR NATIONAL 2 INITIAL WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	00
270 004	LABEL, J-SERIES	2-	6 5	11100
271 005	SUBLABEL, J-SERIES	7-	9 3	101
800 001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
1744 001	PROPRIETARY INFORMATION	13-	69 57	SPECIFIED IN THE APPROPRIATE FRENCH DOCUMENTATION.

FIELD CODING FOR J28.5I (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1744	001	PROPRIETARY INFORMATION -----		INFORMATION RESERVED FOR THE EXCLUSIVE USE OF A SERVICE/NATION. DATA ITEM NAMES, BIT CODING, AND EXPLANATIONS ARE SPECIFIED IN THE APPROPRIATE SERVICE/NATION DOCUMENTATION.

MIL-STD-6016B

J28.6 MESSAGE SUMMARY

PURPOSE

The J28.6 U.S. National 5 (NSA) message purpose is specified in the appropriate NSA documentation.

DATA ELEMENT SUMMARY

<u>J28.6I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
PROPRIETARY INFORMATION	57

MIL-STD-6016B

J28.6 TRANSMIT/RECEIVE RULES

TITLE: U.S. National 5 (NSA)

TRANSMIT RULES

The transmit rules are specified in the appropriate NSA documentation.

RECEIVE RULES

The receive rules are specified in the appropriate NSA documentation.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J28.6I

WORD TITLE: U.S. NATIONAL 5 (NSA) WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00	:		
												:	MESSAGE	:	SUBLABEL,	:									:	WORD	:
<---												:	LENGTH	:	J-SERIES	:	LABEL, J-SERIES				:	FORMAT	:				:
												:	INDICATOR	:									:				:
												:	3	:	3	:	5				:	2	:				:

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

PROPRIETARY INFORMATION

57

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50
:																				
:																				
:																				
:																				

--->

WORD DESCRIPTION

WORD NUMBER: J28.6I
WORD TITLE: U.S. NATIONAL 5 (NSA) WORD

REFERENCE		BIT #		RESOLUTION, CODING, ETC
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	
1550 001	WORD FORMAT	0-	1 2	00
270 004	LABEL, J-SERIES	2-	6 5	11100
271 005	SUBLABEL, J-SERIES	7-	9 3	110
800 001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
1744 001	PROPRIETARY INFORMATION	13-	69 57	SPECIFIED IN THE APPROPRIATE NSA DOCUMENTATION.

FIELD CODING FOR J28.6I (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1744	001	PROPRIETARY INFORMATION -----		INFORMATION RESERVED FOR THE EXCLUSIVE USE OF A SERVICE/NATION. DATA ITEM NAMES, BIT CODING, AND EXPLANATIONS ARE SPECIFIED IN THE APPROPRIATE SERVICE/NATION DOCUMENTATION.

MIL-STD-6016B

J28.7 MESSAGE SUMMARY

PURPOSE

The J28.7 U.K. National 1 message purpose is specified in the appropriate U.K. documentation.

DATA ELEMENT SUMMARY

<u>J28.7I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
PROPRIETARY INFORMATION	57

MIL-STD-6016B

J28.7 TRANSMIT/RECEIVE RULES

TITLE: UK National 1

TRANSMIT RULES

The transmit rules are specified in the appropriate U.K. documentation.

RECEIVE RULES

The receive rules are specified in the appropriate U.K. documentation.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J28.7I

WORD TITLE: UK NATIONAL 1 INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00	:	
<---												:	MESSAGE	:	SUBLABEL,				:	WORD				:		
												:	LENGTH	:	J-SERIES				:	LABEL, J-SERIES				:	FORMAT	:
												:	INDICATOR	:					:					:		:
												:	3	:	3				:	5				:	2	:

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

PROPRIETARY INFORMATION

																								57	
--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	----	--

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				

WORD DESCRIPTION

WORD NUMBER: J28.7I
WORD TITLE: UK NATIONAL 1 INITIAL WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	00
270 004	LABEL, J-SERIES	2-	6 5	11100
271 005	SUBLABEL, J-SERIES	7-	9 3	111
800 001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
1744 001	PROPRIETARY INFORMATION	13-	69 57	SPECIFIED IN THE APPROPRIATE UK DOCUMENTATION.

FIELD CODING FOR J28.7I (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1744	001	PROPRIETARY INFORMATION -----		INFORMATION RESERVED FOR THE EXCLUSIVE USE OF A SERVICE/NATION. DATA ITEM NAMES, BIT CODING, AND EXPLANATIONS ARE SPECIFIED IN THE APPROPRIATE SERVICE/NATION DOCUMENTATION.

J29 MESSAGES

TABLE J29-1. J29 National Use Word Applicability Table

INITIAL WORD	SUBLABEL								
	J29.0 RESERVED	J29.1I U.K. NATIONAL 2		J29.3I SP NATIONAL 1	J29.4I SP NATIONAL 2	J29.5I CA NATIONAL			J29.7I AU NATIONAL
EXTENSION WORD - 0									
CONTINUATION WORD - 0									
...									
...									
...									
...									
...									
...									
...									
...									
31									

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

J29.1 MESSAGE SUMMARY

PURPOSE

The J29.1 U.K. National 2 message purpose is specified in the appropriate U.K. documentation.

DATA ELEMENT SUMMARY

<u>J29.1I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
PROPRIETARY INFORMATION	57

MIL-STD-6016B

J29.1 TRANSMIT/RECEIVE RULES

TITLE: UK National 2

TRANSMIT RULES

The transmit rules are specified in the appropriate U.K. documentation.

RECEIVE RULES

The receive rules are specified in the appropriate U.K. documentation.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J29.1I
WORD TITLE: UK NATIONAL 2

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00
												:	MESSAGE	:	SUBLABEL,	:						:	WORD	:
<---												:	LENGTH	:	J-SERIES	:	LABEL,	J-SERIES	:	FORMAT	:			
												:	INDICATOR	:						:		:		
												:	3	:	3	:	5	:	2	:				

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

PROPRIETARY INFORMATION

57																							
----	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50
:																				
:																				
:																				
:																				

--->

WORD DESCRIPTION

WORD NUMBER: J29.1I
WORD TITLE: UK NATIONAL 2

REFERENCE		BIT #		RESOLUTION, CODING, ETC
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	
1550 001	WORD FORMAT	0-	1 2	00
270 004	LABEL, J-SERIES	2-	6 5	11101
271 005	SUBLABEL, J-SERIES	7-	9 3	001
800 001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
1744 001	PROPRIETARY INFORMATION	13-	69 57	SPECIFIED IN THE APPROPRIATE UK DOCUMENTATION.

FIELD CODING FOR J29.1I (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1744	001	PROPRIETARY INFORMATION -----		INFORMATION RESERVED FOR THE EXCLUSIVE USE OF A SERVICE/NATION. DATA ITEM NAMES, BIT CODING, AND EXPLANATIONS ARE SPECIFIED IN THE APPROPRIATE SERVICE/NATION DOCUMENTATION.

MIL-STD-6016B

J29.3 MESSAGE SUMMARY

PURPOSE

The J29.3 SP National 1 message purpose is specified in the appropriate SP documentation.

DATA ELEMENT SUMMARY

<u>J29.3I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
PROPRIETARY INFORMATION	57

MIL-STD-6016B

J29.3 TRANSMIT/RECEIVE RULES

TITLE: SP National 1 Message

TRANSMIT RULES

The transmit rules are specified in the appropriate SP documentation.

RECEIVE RULES

The receive rules are specified in the appropriate SP documentation.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J29.3I

WORD TITLE: SP NATIONAL 1 INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00	:
												:	MESSAGE	:	SUBLABEL,	:							:	WORD	:
<---												:	LENGTH	:	J-SERIES	:	LABEL,	J-SERIES	:	FORMAT	:			:	
												:	INDICATOR	:		:							:		:
												:	3	:	3	:	5	:	2	:			:		:

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

PROPRIETARY INFORMATION

57																							

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50
:																				
:																				
:																				
:																				

--->

WORD DESCRIPTION

WORD NUMBER: J29.3I
WORD TITLE: SP NATIONAL 1 INITIAL WORD

REFERENCE		BIT #		RESOLUTION, CODING, ETC
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	
1550 001	WORD FORMAT	0-	1 2	00
270 004	LABEL, J-SERIES	2-	6 5	11101
271 005	SUBLABEL, J-SERIES	7-	9 3	011
800 001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
1744 001	PROPRIETARY INFORMATION	13-	69 57	SPECIFIED IN THE APPROPRIATE SP DOCUMENTATION.

FIELD CODING FOR J29.3I (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1744	001	PROPRIETARY INFORMATION -----		INFORMATION RESERVED FOR THE EXCLUSIVE USE OF A SERVICE/NATION. DATA ITEM NAMES, BIT CODING, AND EXPLANATIONS ARE SPECIFIED IN THE APPROPRIATE SERVICE/NATION DOCUMENTATION.

MIL-STD-6016B

J29.4 MESSAGE SUMMARY

PURPOSE

The J29.4 SP National 2 message purpose is specified in the appropriate SP documentation.

DATA ELEMENT SUMMARY

<u>J29.4I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
PROPRIETARY INFORMATION	57

MIL-STD-6016B

J29.4 TRANSMIT/RECEIVE RULES

TITLE: SP National 2 Message

TRANSMIT RULES

The transmit rules are specified in the appropriate SP documentation.

RECEIVE RULES

The receive rules are specified in the appropriate SP documentation.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J29.4I

WORD TITLE: SP NATIONAL 2 INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00	:
												:	MESSAGE	:	SUBLABEL,	:							:	WORD	:
<---												:	LENGTH	:	J-SERIES	:	LABEL,	J-SERIES	:	FORMAT	:			:	
												:	INDICATOR	:		:							:		:
												:	3	:	3	:	5	:	2	:			:		:

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

PROPRIETARY INFORMATION

57																							

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50
:																				
:																				
:																				
:																				

--->

WORD DESCRIPTION

WORD NUMBER: J29.4I
WORD TITLE: SP NATIONAL 2 INITIAL WORD

REFERENCE		BIT #		RESOLUTION, CODING, ETC
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	
1550 001	WORD FORMAT	0-	1 2	00
270 004	LABEL, J-SERIES	2-	6 5	11101
271 005	SUBLABEL, J-SERIES	7-	9 3	100
800 001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
1744 001	PROPRIETARY INFORMATION	13-	69 57	SPECIFIED IN THE APPROPRIATE SP DOCUMENTATION.

FIELD CODING FOR J29.4I (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1744	001	PROPRIETARY INFORMATION -----		INFORMATION RESERVED FOR THE EXCLUSIVE USE OF A SERVICE/NATION. DATA ITEM NAMES, BIT CODING, AND EXPLANATIONS ARE SPECIFIED IN THE APPROPRIATE SERVICE/NATION DOCUMENTATION.

MIL-STD-6016B

J29.5 MESSAGE SUMMARY

PURPOSE

The J29.5 CA National message purpose is specified in the appropriate CA documentation.

DATA ELEMENT SUMMARY

<u>J29.5I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
PROPRIETARY INFORMATION	57

MIL-STD-6016B

J29.5 TRANSMIT/RECEIVE RULES

TITLE: CA National Message

TRANSMIT RULES

The transmit rules are specified in the appropriate CA documentation.

RECEIVE RULES

The transmit rules are specified in the appropriate CA documentation.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J29.5I

WORD TITLE: CA NATIONAL INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00		
												:	MESSAGE	:	SUBLABEL,	:						:	WORD	:		
<---												:	LENGTH	:	J-SERIES	:	LABEL, J-SERIES					:	FORMAT	:		
												:	INDICATOR	:						:						:
												:	3	:	3	:	5					:	2	:		

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

PROPRIETARY INFORMATION

57																							
----	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				

WORD DESCRIPTION

WORD NUMBER: J29.5I
WORD TITLE: CA NATIONAL INITIAL WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT		#	RESOLUTION, CODING, ETC
			POSITION	BITS		
1550	001	WORD FORMAT	0-	1	2	00
270	004	LABEL, J-SERIES	2-	6	5	11101
271	005	SUBLABEL, J-SERIES	7-	9	3	101
800	001	MESSAGE LENGTH INDICATOR	10-	12	3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
1744	001	PROPRIETARY INFORMATION	13-	69	57	SPECIFIED IN THE APPROPRIATE CA DOCUMENTATION.

FIELD CODING FOR J29.5I (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1744	001	PROPRIETARY INFORMATION -----		INFORMATION RESERVED FOR THE EXCLUSIVE USE OF A SERVICE/NATION. DATA ITEM NAMES, BIT CODING, AND EXPLANATIONS ARE SPECIFIED IN THE APPROPRIATE SERVICE/NATION DOCUMENTATION.

MIL-STD-6016B

J29.7 MESSAGE SUMMARY

PURPOSE

The J29.7 AU National message purpose is specified in the appropriate AU documentation.

DATA ELEMENT SUMMARY

<u>J29.7I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
PROPRIETARY INFORMATION	57

MIL-STD-6016B

J29.7 TRANSMIT/RECEIVE RULES

TITLE: AU National Message

TRANSMIT RULES

The transmit rules are specified in the appropriate AU documentation.

RECEIVE RULES

The receive rules are specified in the appropriate AU documentation.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J29.7I

WORD TITLE: AU NATIONAL INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00	:
												:	MESSAGE	:	SUBLABEL,	:							:	WORD	:
<---												:	LENGTH	:	J-SERIES	:	LABEL,	J-SERIES	:	FORMAT	:			:	
												:	INDICATOR	:		:							:		:
												:	3	:	3	:	5	:	2	:			:		:

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

PROPRIETARY INFORMATION

57																							

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50			
:																							
:																							
:																							

WORD DESCRIPTION

WORD NUMBER: J29.7I
WORD TITLE: AU NATIONAL INITIAL WORD

REFERENCE		BIT #		RESOLUTION, CODING, ETC
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	
1550 001	WORD FORMAT	0-	1 2	00
270 004	LABEL, J-SERIES	2-	6 5	11101
271 005	SUBLABEL, J-SERIES	7-	9 3	111
800 001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS.
				1-7 NUMBER OF ADDITIONAL WORDS.
1744 001	PROPRIETARY INFORMATION	13-	69 57	SPECIFIED IN THE APPROPRIATE AU DOCUMENTATION.

FIELD CODING FOR J29.7I (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1744	001	PROPRIETARY INFORMATION -----		INFORMATION RESERVED FOR THE EXCLUSIVE USE OF A SERVICE/NATION. DATA ITEM NAMES, BIT CODING, AND EXPLANATIONS ARE SPECIFIED IN THE APPROPRIATE SERVICE/NATION DOCUMENTATION.

TABLE J30-1. J30 National Use Word Applicability Table

INITIAL WORD	SUBLABEL							
	J30.0I GE NATIONAL 1	J30.1I GE NATIONAL 2	J30.2I IT NATIONAL 1	J30.3I IT NATIONAL 2	J30.4I IT NATIONAL 3	J30.5I FR NATIONAL 3	J30.6I FR NATIONAL 4	J30.7I FR NATIONAL 5
EXTENSION WORD - 0								
CONTINUATION WORD - 0								
...								
...								
...								
...								
...								
...								
...								
31								

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

J30.0 MESSAGE SUMMARY

PURPOSE

The J30.0 GE National 1 message purpose is specified in the appropriate German documentation.

DATA ELEMENT SUMMARY

<u>J30.0I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
PROPRIETARY INFORMATION	57

MIL-STD-6016B

J30.0 TRANSMIT/RECEIVE RULES

TITLE: GE National 1 Message

TRANSMIT RULES

The transmit rules are specified in the appropriate German documentation.

RECEIVE RULES

The receive rules are specified in the appropriate German documentation.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J30.0I

WORD TITLE: GE NATIONAL 1 INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00	:			
												:	MESSAGE	:	SUBLABEL,	:									:	WORD	:	
<---												:	LENGTH	:	J-SERIES	:	LABEL, J-SERIES				:	FORMAT				:		:
												:	INDICATOR	:									:		:		:	
												:	3	:	3	:	5				:	2	:				:	

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

PROPRIETARY INFORMATION

																								57	
--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	----	--

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50											
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															
:																															

WORD DESCRIPTION

WORD NUMBER: J30.0I

WORD TITLE: GE NATIONAL 1 INITIAL WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	00
270 004	LABEL, J-SERIES	2-	6 5	11110
271 005	SUBLABEL, J-SERIES	7-	9 3	000
800 001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
1744 001	PROPRIETARY INFORMATION	13-	69 57	SPECIFIED IN THE APPROPRIATE GERMAN DOCUMENTATION.

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1744	001	PROPRIETARY INFORMATION -----		INFORMATION RESERVED FOR THE EXCLUSIVE USE OF A SERVICE/NATION. DATA ITEM NAMES, BIT CODING, AND EXPLANATIONS ARE SPECIFIED IN THE APPROPRIATE SERVICE/NATION DOCUMENTATION.

MIL-STD-6016B

J30.1 MESSAGE SUMMARY

PURPOSE

The J30.1 GE National 2 message purpose is specified in the appropriate German documentation.

DATA ELEMENT SUMMARY

<u>J30.1I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
PROPRIETARY INFORMATION	57

MIL-STD-6016B

J30.1 TRANSMIT/RECEIVE RULES

TITLE: GE National 2 Message

TRANSMIT RULES

The transmit rules are specified in the appropriate German documentation.

RECEIVE RULES

The receive rules are specified in the appropriate German documentation.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J30.1I

WORD TITLE: GE NATIONAL 2 INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00	:
												:	MESSAGE	:	SUBLABEL,	:							:	WORD	:
<---												:	LENGTH	:	J-SERIES	:	LABEL,	J-SERIES	:	FORMAT	:			:	
												:	INDICATOR	:		:							:		:
												:	3	:	3	:	5	:	2	:			:		:

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

PROPRIETARY INFORMATION

57																							

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50			
:																					--->		
:																							
:																							

WORD DESCRIPTION

WORD NUMBER: J30.1I

WORD TITLE: GE NATIONAL 2 INITIAL WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	00
270 004	LABEL, J-SERIES	2-	6 5	11110
271 005	SUBLABEL, J-SERIES	7-	9 3	001
800 001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
1744 001	PROPRIETARY INFORMATION	13-	69 57	SPECIFIED IN THE APPROPRIATE GERMAN DOCUMENTATION.

FIELD CODING FOR J30.1I (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1744	001	PROPRIETARY INFORMATION -----		INFORMATION RESERVED FOR THE EXCLUSIVE USE OF A SERVICE/NATION. DATA ITEM NAMES, BIT CODING, AND EXPLANATIONS ARE SPECIFIED IN THE APPROPRIATE SERVICE/NATION DOCUMENTATION.

MIL-STD-6016B

J30.2 MESSAGE SUMMARY

PURPOSE

The J30.2 IT National 1 message purpose is specified in the appropriate IT documentation.

DATA ELEMENT SUMMARY

<u>J30.2I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
PROPRIETARY INFORMATION	57

MIL-STD-6016B

J30.2 TRANSMIT/RECEIVE RULES

TITLE: IT National 1 Message

TRANSMIT RULES

The transmit rules are specified in the appropriate IT documentation.

RECEIVE RULES

The receive rules are specified in the appropriate IT documentation.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J30.2I

WORD TITLE: IT NATIONAL 1 INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00					
												:	MESSAGE	:	SUBLABEL,	:						:	WORD	:					
<---												:	LENGTH	:	J-SERIES	:	LABEL,	J-SERIES	:	FORMAT	:								
												:	INDICATOR	:													:		:
												:	3	:	3	:	5						:	2	:				

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

PROPRIETARY INFORMATION

57																							
----	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50
:																				
:																				
:																				
:																				

--->

WORD DESCRIPTION

WORD NUMBER: J30.2I

WORD TITLE: IT NATIONAL 1 INITIAL WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	00
270 004	LABEL, J-SERIES	2-	6 5	11110
271 005	SUBLABEL, J-SERIES	7-	9 3	010
800 001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
1744 001	PROPRIETARY INFORMATION	13-	69 57	SPECIFIED IN THE APPROPRIATE IT DOCUMENTATION.

FIELD CODING FOR J30.2I (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1744	001	PROPRIETARY INFORMATION -----		INFORMATION RESERVED FOR THE EXCLUSIVE USE OF A SERVICE/NATION. DATA ITEM NAMES, BIT CODING, AND EXPLANATIONS ARE SPECIFIED IN THE APPROPRIATE SERVICE/NATION DOCUMENTATION.

MIL-STD-6016B

J30.3 MESSAGE SUMMARY

PURPOSE

The J30.3 IT National 2 message purpose is specified in the appropriate IT documentation.

DATA ELEMENT SUMMARY

<u>J30.3I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
PROPRIETARY INFORMATION	57

MIL-STD-6016B

J30.3 TRANSMIT/RECEIVE RULES

TITLE: IT National 2 Message

TRANSMIT RULES

The transmit rules are specified in the appropriate IT documentation.

RECEIVE RULES

The receive rules are specified in the appropriate IT documentation.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J30.3I

WORD TITLE: IT NATIONAL 2 INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00		
												:	MESSAGE	:	SUBLABEL,	:						:	WORD	:		
<---												:	LENGTH	:	J-SERIES	:	LABEL, J-SERIES					:	FORMAT	:		
												:	INDICATOR	:						:						:
												:	3	:	3	:	5					:	2	:		

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

PROPRIETARY INFORMATION

57																							
----	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				

WORD DESCRIPTION

WORD NUMBER: J30.3I
WORD TITLE: IT NATIONAL 2 INITIAL WORD

REFERENCE		BIT #		RESOLUTION, CODING, ETC
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	
1550 001	WORD FORMAT	0-	1 2	00
270 004	LABEL, J-SERIES	2-	6 5	11110
271 005	SUBLABEL, J-SERIES	7-	9 3	011
800 001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
1744 001	PROPRIETARY INFORMATION	13-	69 57	SPECIFIED IN THE APPROPRIATE IT DOCUMENTATION.

FIELD CODING FOR J30.3I (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1744	001	PROPRIETARY INFORMATION -----		INFORMATION RESERVED FOR THE EXCLUSIVE USE OF A SERVICE/NATION. DATA ITEM NAMES, BIT CODING, AND EXPLANATIONS ARE SPECIFIED IN THE APPROPRIATE SERVICE/NATION DOCUMENTATION.

MIL-STD-6016B

J30.4 MESSAGE SUMMARY

PURPOSE

The J30.4 IT National 3 message purpose is specified in the appropriate IT documentation.

DATA ELEMENT SUMMARY

<u>J30.4I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
PROPRIETARY INFORMATION	57

MIL-STD-6016B

J30.4 TRANSMIT/RECEIVE RULES

TITLE: IT National 3 Message

TRANSMIT RULES

The transmit rules are specified in the appropriate IT documentation.

RECEIVE RULES

The receive rules are specified in the appropriate IT documentation.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J30.4I

WORD TITLE: IT NATIONAL 3 INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00				
												:	MESSAGE	:	SUBLABEL,	:						:	WORD	:				
<---												:	LENGTH	:	J-SERIES	:	LABEL,	J-SERIES	:	FORMAT	:							
												:	INDICATOR	:												:		:
												:	3	:	3	:	5						:	2	:			

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

PROPRIETARY INFORMATION

57																							
----	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				

WORD DESCRIPTION

WORD NUMBER: J30.4I
WORD TITLE: IT NATIONAL 3 INITIAL WORD

REFERENCE		BIT #		RESOLUTION, CODING, ETC
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	
1550 001	WORD FORMAT	0-	1 2	00
270 004	LABEL, J-SERIES	2-	6 5	11110
271 005	SUBLABEL, J-SERIES	7-	9 3	100
800 001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
1744 001	PROPRIETARY INFORMATION	13-	69 57	SPECIFIED IN THE APPROPRIATE IT DOCUMENTATION.

FIELD CODING FOR J30.4I (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1744	001	PROPRIETARY INFORMATION -----		INFORMATION RESERVED FOR THE EXCLUSIVE USE OF A SERVICE/NATION. DATA ITEM NAMES, BIT CODING, AND EXPLANATIONS ARE SPECIFIED IN THE APPROPRIATE SERVICE/NATION DOCUMENTATION.

MIL-STD-6016B

J30.5 MESSAGE SUMMARY

PURPOSE

The J30.5 FR National 3 message purpose is specified in the appropriate French documentation.

DATA ELEMENT SUMMARY

<u>J30.5I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
PROPRIETARY INFORMATION	57

MIL-STD-6016B

J30.5 TRANSMIT/RECEIVE RULES

TITLE: FR National 3 (Army) Message

TRANSMIT RULES

The transmit rules are specified in the appropriate French documentation.

RECEIVE RULES

The receive rules are specified in the appropriate French documentation.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J30.5I

WORD TITLE: FR NATIONAL 3 (ARMY) INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00				
												:	MESSAGE	:	SUBLABEL,	:						:	WORD	:				
<---												:	LENGTH	:	J-SERIES	:	LABEL,	J-SERIES	:	FORMAT	:							
												:	INDICATOR	:												:		:
												:	3	:	3	:	5						:	2	:			

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

PROPRIETARY INFORMATION

57																							
----	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				

WORD DESCRIPTION

WORD NUMBER: J30.5I

WORD TITLE: FR NATIONAL 3 (ARMY) INITIAL WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	00
270 004	LABEL, J-SERIES	2-	6 5	11110
271 005	SUBLABEL, J-SERIES	7-	9 3	101
800 001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
1744 001	PROPRIETARY INFORMATION	13-	69 57	SPECIFIED IN THE APPROPRIATE FRENCH DOCUMENTATION.

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1744	001	PROPRIETARY INFORMATION -----		INFORMATION RESERVED FOR THE EXCLUSIVE USE OF A SERVICE/NATION. DATA ITEM NAMES, BIT CODING, AND EXPLANATIONS ARE SPECIFIED IN THE APPROPRIATE SERVICE/NATION DOCUMENTATION.

MIL-STD-6016B

J30.6 MESSAGE SUMMARY

PURPOSE

The J30.6 FR National 4 message purpose is specified in the appropriate French documentation.

DATA ELEMENT SUMMARY

<u>J30.6I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
PROPRIETARY INFORMATION	57

MIL-STD-6016B

J30.6 TRANSMIT/RECEIVE RULES

TITLE: FR National 4 (Air Force) Message

TRANSMIT RULES

The transmit rules are specified in the appropriate French documentation.

RECEIVE RULES

The receive rules are specified in the appropriate French documentation.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J30.6I

WORD TITLE: FR NATIONAL 4 (AIR FORCE) INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00	:			
<---												:	MESSAGE	:	SUBLABEL,	:									:	WORD	:	
												:	LENGTH	:	J-SERIES	:	LABEL, J-SERIES				:	FORMAT				:		:
												:	INDICATOR	:									:		:		:	
												:	3	:	3	:	5				:	2	:				:	

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

PROPRIETARY INFORMATION

57																									

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				
:																				

WORD DESCRIPTION

WORD NUMBER: J30.6I
WORD TITLE: FR NATIONAL 4 (AIR FORCE) INITIAL WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT		#	RESOLUTION, CODING, ETC
			POSITION	BITS		
1550	001	WORD FORMAT	0-	1	2	00
270	004	LABEL, J-SERIES	2-	6	5	11110
271	005	SUBLABEL, J-SERIES	7-	9	3	110
800	001	MESSAGE LENGTH INDICATOR	10-	12	3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
1744	001	PROPRIETARY INFORMATION	13-	69	57	SPECIFIED IN THE APPROPRIATE FRENCH DOCUMENTATION.

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1744	001	PROPRIETARY INFORMATION -----		INFORMATION RESERVED FOR THE EXCLUSIVE USE OF A SERVICE/NATION. DATA ITEM NAMES, BIT CODING, AND EXPLANATIONS ARE SPECIFIED IN THE APPROPRIATE SERVICE/NATION DOCUMENTATION.

MIL-STD-6016B

J30.7 MESSAGE SUMMARY

PURPOSE

The J30.7 FR National 5 message purpose is specified in the appropriate French documentation.

DATA ELEMENT SUMMARY

<u>J30.7I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
PROPRIETARY INFORMATION	57

MIL-STD-6016B

J30.7 TRANSMIT/RECEIVE RULES

TITLE: FR National 5 (Navy) Message

TRANSMIT RULES

The transmit rules are specified in the appropriate French documentation.

RECEIVE RULES

The receive rules are specified in the appropriate French documentation.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J30.7I
WORD TITLE: FR NATIONAL 5 (NAVY) INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00				
												:	MESSAGE	:	SUBLABEL,	:						:	WORD	:				
<---												:	LENGTH	:	J-SERIES	:	LABEL,	J-SERIES	:	FORMAT	:							
												:	INDICATOR	:												:		:
												:	3	:	3	:	5						:	2	:			

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

PROPRIETARY INFORMATION

57																							
----	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50
:																				
:																				
:																				
:																				

--->

WORD DESCRIPTION

WORD NUMBER: J30.7I

WORD TITLE: FR NATIONAL 5 (NAVY) INITIAL WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT		#	RESOLUTION, CODING, ETC
			POSITION	BITS		
1550	001	WORD FORMAT	0-	1	2	00
270	004	LABEL, J-SERIES	2-	6	5	11110
271	005	SUBLABEL, J-SERIES	7-	9	3	111
800	001	MESSAGE LENGTH INDICATOR	10-	12	3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
1744	001	PROPRIETARY INFORMATION	13-	69	57	SPECIFIED IN THE APPROPRIATE FRENCH DOCUMENTATION.

FIELD CODING FOR J30.7I (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1744	001	PROPRIETARY INFORMATION -----		INFORMATION RESERVED FOR THE EXCLUSIVE USE OF A SERVICE/NATION. DATA ITEM NAMES, BIT CODING, AND EXPLANATIONS ARE SPECIFIED IN THE APPROPRIATE SERVICE/NATION DOCUMENTATION.

TABLE J31-1. J31 Miscellaneous Word Applicability Table

INITIAL WORD	SUBLABEL						
	J31.0I OVER-THE-AIR REKEYING MANAGEMENT	J31.1I OVER-THE-AIR REKEYING					J31.7I NO STATEMENT
EXTENSION WORD - 0	J31.0E0	J31.1E0					
1		J31.1E1					
CONTINUATION WORD - 0							
1	J31.0C1 OVER-THE-AIR REKEYING MANAGEMENT WORD 1						
2	J31.0C2 OVER-THE-AIR REKEYING MANAGEMENT WORD 2						
...							
...							
...							
...							
...							
...							
31							

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

J31.0 MESSAGE SUMMARY

PURPOSE

The J31.0 Over-the-air Rekeying Management Message is used to exchange cryptonet management information for rekeying the KGV-8.

DATA ELEMENT SUMMARY

<u>J31.0I</u>		<u>J31.0E0 (Continued)</u>	
DATA ELEMENT	# BITS	DATA ELEMENT	# BITS
WORD FORMAT	2	CRYPTOVARIABLE LOGICAL LABEL	7
LABEL, J-SERIES	5	LOCATION, 6	
SUBLABEL, J-SERIES	3	CRYPTOPERIOD DESIGNATOR,	1
MESSAGE LENGTH INDICATOR	3	LOCATION 7	
TRACK NUMBER, ADDRESSEE	15	CRYPTOVARIABLE LOGICAL LABEL	7
SPARE	3	LOCATION, 7	
ACTION CODE, OVER-THE-AIR REKEYING	4	SPARE	4
EXECUTE MINUTES	6		
EXECUTE HOURS	5	<u>J31.0C1</u>	
SPARE	15	DATA ELEMENT	# BITS
RECEIPT/COMPLIANCE	5	WORD FORMAT	2
RECURRENCE RATE, RECEIPT/ COMPLIANCE	4	CONTINUATION WORD LABEL	5
		TRACK NUMBER, SPECIFIED	15
		SPARE	3
		CRYPTOSTATUS INFORMATION CODE	1
		SECURE DATA UNIT	16
<u>J31.0E0</u>		IDENTIFICATION NUMBER	
DATA ELEMENT	# BITS	UNIQUE VARIABLE UPDATE NUMBER	7
WORD FORMAT	2	CRYPTOPERIOD DESIGNATOR,	1
CRYPTOPERIOD DESIGNATOR,	1	CURRENT	
LOCATION 0		CRYPTOVARIABLE LOGICAL LABEL,	7
CRYPTOVARIABLE LOGICAL LABEL	7	REQUEST	
LOCATION, 0		MEMORY LOCATION, REQUEST	4
CRYPTOPERIOD DESIGNATOR,	1	CRYPTOPERIOD INDICATOR,	1
LOCATION 1		REQUEST	
CRYPTOVARIABLE LOGICAL LABEL	7	SPARE	8
LOCATION, 1			
CRYPTOPERIOD DESIGNATOR,	1	<u>J31.0C2</u>	
LOCATION 2		DATA ELEMENT	# BITS
CRYPTOVARIABLE LOGICAL LABEL	7	WORD FORMAT	2
LOCATION, 2		CONTINUATION WORD LABEL	5
CRYPTOPERIOD DESIGNATOR,	1	MEMORY LOCATION, REKEY	3
LOCATION 3		CRYPTOVARIABLE LOGICAL LABEL,	7
CRYPTOVARIABLE LOGICAL LABEL	7	REKEY	
LOCATION, 3		CRYPTOPERIOD DESIGNATOR, REKEY	1
CRYPTOPERIOD DESIGNATOR,	1	CRYPTOVARIABLE SYNCHRONIZATION	39
LOCATION 4		BITS	
CRYPTOVARIABLE LOGICAL LABEL	7	CRYPTOVARIABLE LOGICAL LABEL	7
LOCATION, 4		SYNCHRONIZATION	
CRYPTOPERIOD DESIGNATOR,	1	CRYPTOPERIOD DESIGNATOR,	1
LOCATION 5		SYNCHRONIZATION	
CRYPTOVARIABLE LOGICAL LABEL	7	SPARE	5
LOCATION, 5			
CRYPTOPERIOD DESIGNATOR,	1		
LOCATION 6			

MIL-STD-6016B

J31.0 TRANSMIT/RECEIVE RULES

TITLE: Over-the-Air Rekeying Management Message

TRANSMIT RULES

1. The J31.0 Over-the-Air Rekeying Management message shall be transmitted:

a. By the over-the-air rekeying center as a synchronization message when the Action Code, Over-the-Air Rekeying field is set to value 1 and a specific execution time for a new cryptovvariable is required, or when the 39 cryptovvariable synchronization bits are required. In the above case, the J31.0 message must be followed by the J31.1 Over-the-Air Rekeying message.

b. By an individual JU as a cryptovvariable status report when the Action Code, Over-the-Air Rekeying field is set to value 2 in response to a cryptovvariable status request, and as a direct cryptovvariable request when the Action Code, Over-the-Air Rekeying field is set to value 3 and a JU requires a cryptovvariable label not currently held.

c. By an authorized JU as an indirect cryptovvariable request when the Action Code, Over-the-Air Rekeying field is set to value 4 and the authorized JU requires that a cryptovvariable be provided to another JU, and as a cryptovvariable status request message when the Action Code Over-the-Air Rekeying field is set to value 5 and the authorized JU requires the cryptovvariable status of the addressed JU.

2. The J31.0 message shall contain the words indicated in Table 31-2.

3. A J31.0 (ACT = 2) message is transmitted with the R/C field set to value 2, all other original J31.0 messages shall be transmitted with the R/C field set to value 0; however, the terminal does not provide a Receipt/Compliance response for the J31.0 (ACT = 7) Packed Over-The-Mux Rekeying (OMTR) message. When the Action Code, Over-the-Air-Rekeying field is set to values 1, 2, 5, 6, or 7 the J31.0 message shall be addressed to a specific terminal. When the Action Code , Over-the-Air-Rekeying field is set to values 3 or 4 the J31.0 message shall be addressed either to a specific terminal or to 77777(octal).

J31.0 TRANSMIT/RECEIVE RULES (Continued)

RECEIVE RULES

1. When a J31.0 message is received with the Action Code, Over-the-Air Rekeying field set to value 1:

a. The terminal shall transmit a machine receipt J31.0 message (R/C = 2) when this message is accepted.

b. The terminal shall retain this message until the corresponding J31.1 message is received and the terminal performs the required rekey function.

2. When a J31.0 message is received with the Action Code, Over-the-Air Rekeying field set to 2 there are no receive rules specified.

3. When a J31.0 message is received with the Action Code, Over-the-Air Rekeying field set to value 3 and the Memory Location Request field is set to no statement, the receiving JU shall use the cryptovvariable cross-reference table to determine the appropriate memory location for the requested cryptovvariable.

4. When a J31.0 message is received with the Action Code, Over-the-Air Rekeying field set to value 4:

a. And the Cryptostatus Information Code field is set to value 1, the receiving JU shall ascertain the cryptovvariable status of the subject JU.

b. When the Memory Location, Request field is set to no statement, the receiving JU shall determine the correct memory location.

5. When a J31.0 message is received with the Action Code, Over-the-Air Rekeying field set to value 5 the addressed unit shall transmit the requested single message with the R/C field set to value 2 in the time slot specified in the original J31.0 message (R/C = 0).

J31.0 TRANSMIT/RECEIVE RULES (Continued)

RECEIVE RULES (Continued)

6. Original J31.0 messages in which the Action Code, Over-the-Air- Rekeying field is set to values 1, 2, or 5 shall be accepted only if they are specifically addressed to the terminal. Original J31.0 messages in which the Action Code, Over-the-Air-Rekeying field is set to values 3 or 4 shall be accepted by a JU with responsibility for cryptonet management if they are specifically addressed to the terminal or to 77777(octal).

7. When a J31.0 message is received with the Action Code, Over-the-Air Rekeying field set to value 6 the terminal shall transmit a machine receipt J31.0 message with the R/C field set to value 2 and retain the message until it performs the required rekeying function in accordance with the execution time specified in the message. At the execution time specified:

a. The terminal will transmit an appropriate CANTPRO J31.0 message if the KGV-8 cannot process the cryptovvariable.

b. The terminal will transmit a HAVCO J31.0 message when the KGV-8 properly processes the cryptovvariable.

TABLE J31-2. Required Word Sequences for Action Code,
Over-the-Air Rekeying Values

ACTION CODE, OVER-THE-AIR REKEYING	J31.0 WORDS TO BE TRANSMITTED			
	I	E0	C1	C2
0 - Change Cryptovvariable Immediately ¹				
1 - Change Cryptovvariable at Time Specified	X			X
2 - Cryptovvariable Status Report ²	X	X	X	
3 - Direct Cryptovvariable Request ³	X	X	X	
4 - Indirect Cryptovvariable Request ⁴	X ³	X	X	
5 - Cryptovvariable Status Request ⁵	X			
6 - Packed Over-the-Air Rekeying ⁶	X			X
7 - Packed Over-the MUX Rekeying ⁶	X			X

NOTES:

- 1 Action code 0 is illegal for the J31.0 message.
- 2 For status report the J31.0I execute time fields are not valid. The J31.0E0 is the current cryptovvariable cross-reference table held by the JU. The SDU Identification Number Unique Variable Update Number (UVUN) and the current Cryptoperiod Designator are the only valid fields used in J31.0C1.
- 3 For direct cryptovvariable request the memory location is no statement when a specific location is not or cannot be requested. In this case, the cryptovvariable cross-reference table must be used by the receiving JU to determine the cryptovvariable memory location.
- 4 For the indirect cryptovvariable request, the J31.0E0 word and the SDU Identification Number, UVUN and the current Cryptoperiod Designator for the subject JU shall be transmitted when available. When this information is not available, the cryptovvariable status indicator code shall be set to value 0. When the specific memory location is not or cannot be stated, the memory location field is set to no statement.
- 5 For the cryptovvariable status request, the execute time is invalid.
- 6 For the packed rekeying messages, the I, E0, and E1 words of the J31.1 OTAR message follow the I and C2 words of this message.

.....

WORD TITLE: OVER-THE-AIR REKEYING MANAGEMENT INITIAL WORD

49	48	47	46:	45	44	43	42	41:	40	39	38	37	36	35:	34	33	32	31:	30	29	28:	27	26	25			
<---			:	EXECUTE HOURS					:	EXECUTE MINUTES					:	ACTION CODE, OVER-THE-AIR REKEYING				:	SPARE			:	---		>
			:	5					:	6					:	4				:	3			:			

:	69	68	67	66:	65	64	63	62	61:	60	59	58	57	56	55	54	53	52	51	50
:	RECURRENCE				:					:										
:	RATE, RECEIPT/				:	RECEIPT/COMPLIANCE				:	SPARE									
:	COMPLIANCE				:					:										
:	4				:	5				:	15									

WORD DESCRIPTION

WORD NUMBER: J31.0I

WORD TITLE: OVER-THE-AIR REKEYING MANAGEMENT INITIAL WORD

REFERENCE		BIT #	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0- 1 2	00
270 004	LABEL, J-SERIES	2- 6 5	11111
271 005	SUBLABEL, J-SERIES	7- 9 3	000
800 001	MESSAGE LENGTH INDICATOR	10- 12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
769 006	TRACK NUMBER, ADDRESSEE	13- 27 15	
756 003	SPARE	28- 30 3	
876 001	ACTION CODE, OVER-THE-AIR REKEYING (AC)	31- 34 4	
797 007	EXECUTE MINUTES	35- 40 6	
792 007	EXECUTE HOURS	41- 45 5	
756 015	SPARE	46- 60 15	
392 008	RECEIPT/COMPLIANCE	61- 65 5	
444 025	RECURRENCE RATE, RECEIPT/ COMPLIANCE (RRN R/C)	66- 69 4	

FIELD CODING FOR J31.0I

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	006	TRACK NUMBER, ADDRESSEE -----		THE TN OF A UNIT (I.E., JU OR PU) TO WHICH A MESSAGE IS ADDRESSED.
		NO STATEMENT NUMERIC	0 00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		ILLEGAL NUMERIC	00077 (OCTAL) 00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC	00177 (OCTAL)	COLLECTIVE ADDRESS.
		NUMERIC	00200 THROUGH 07776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL NUMERIC	07777 (OCTAL) 10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
876	001	ACTION CODE, OVER-THE-AIR REKEYING -----		DEFINES THE ACTIONS TO BE PERFORMED BY THE RECEIVING SYSTEM UPON RECEIPT OF AN OVER-THE-AIR REKEYING MANAGEMENT MESSAGE, AND DEFINES REPORT TRANSMITTED IN RESPONSE TO AN OVER-THE-AIR REKEYING MANAGEMENT MESSAGE.
		CHANGE CRYPTOVARIABLE IMMEDIATELY	0	ILLEGAL FOR THE J31.0 MESSAGE.
		CHANGE CRYPTOVARIABLE AT TIME SPECIFIED	1	THE J31.1 MESSAGE WILL FOLLOW IN A SEPARATE TIME SLOT.
		CRYPTOVARIABLE STATUS REPORT	2	THIS REPORT IS TRANSMITTED IN RESPONSE TO A CRYPTOVARIABLE STATUS REQUEST. ILLEGAL FOR THE J31.1 MESSAGE.
		DIRECT CRYPTOVARIABLE REQUEST	3	REKEY THE REQUESTING UNIT INDICATED BY THE SOURCE TN WITH THE CRYPTOVARIABLE INDICATED IN THE J31.0C1 WORD. ILLEGAL FOR THE J31.1 MESSAGE.

5.3-880

MIL-STD-6016B

FIELD CODING FOR J31.0I

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
876	001	ACTION CODE, OVER-THE-AIR REKEYING -----	(CONTINUED)	
		INDIRECT CRYPTOVARIABLE REQUEST	4	REKEY THE UNIT INDICATED BY THE TN SPECIFIED WITH THE CRYPTOVARIABLE INDICATED IN THE J31.0C1 WORD. ILLEGAL FOR THE J31.1 MESSAGE.
		CRYPTOVARIABLE STATUS REQUEST	5	SUBMIT A CRYPTOVARIABLE STATUS REPORT. ILLEGAL FOR THE J31.1 MESSAGE.
		PACKED OTAR	6	CHANGE CRYPTOVARIABLE AT TIME SPECIFIED. MESSAGE GENERATED BY THE SYSTEM CONTROLLER TO REKEY REMOTE JUS WHEN THE EXECUTION TIME IS OTHER THAN IMMEDIATE.
		PACKED OTMR	7	CHANGE CRYPTOVARIABLE AT TIME SPECIFIED. MESSAGE GENERATED BY THE SYSTEM CONTROLLER TO REKEY ITS OWN TERMINAL WHEN EXECUTION TIME IS OTHER THAN IMMEDIATE.
		UNDEFINED RESERVED FOR CLASS 1	8 THROUGH 13 14 THROUGH 15	
797	007	EXECUTE MINUTES -----		THE MINUTE OF THE EXECUTE HOUR WHEN THE ADDRESSEE SHALL PERFORM THE ACTION INDICATED IN THE OVER-THE-AIR REKEYING ACTION CODE. IN ONE MINUTE INCREMENTS.
		0 THROUGH 59 ILLEGAL NO STATEMENT	0 THROUGH 59 60 THROUGH 62 63	
792	007	EXECUTE HOURS -----		THE HOUR WHEN THE ADDRESSEE SHALL PERFORM THE ACTION INDICATED IN THE OVER-THE-AIR REKEYING ACTION CODE.
		0 HOUR 1 THROUGH 23 HOURS ILLEGAL NO STATEMENT	0 1 THROUGH 23 24 THROUGH 30 31	IN ONE HOUR INCREMENTS.
392	008	RECEIPT/COMPLIANCE -----		
		ORIGINAL ORDER	0	RECEIPT/COMPLIANCE RESPONSE REQUIRED.
		ORIGINAL ORDER	1	RECEIPT/COMPLIANCE RESPONSE NOT

5.3-881

MIL-STD-6016B

FIELD CODING FOR J31.0I

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
		MACHINE RECEIPT	2	REQUIRED. MUST BE USED IN
		WILCO (WILL COMPLY)	3	CONJUNCTION WITH ORIGINAL ORDER
				MESSAGES ADDRESSED TO COLLECTIVE
				ADDRESSES. THE ORIGINAL ORDER
				SHALL BE TRANSMITTED 3 TIMES.
				MESSAGE RECEIVED ERROR FREE.
				THE SYSTEM COMPONENT REQUIRED TO
				TAKE ACTION UNDER THIS ORDER WILL
				COMPLY. IN THIS USAGE, THE SYSTEM
				COMPONENT IS A HUMAN OPERATOR OR
				(UNMANNED VEHICLE ONLY) A MACHINE.
		HAVCO (HAVE COMPLIED)	4	THE SYSTEM COMPONENT REQUIRED TO
				TAKE ACTION UNDER THIS ORDER HAS
				COMPLIED. IN THIS USAGE, THE
				SYSTEM COMPONENT MAY BE A HUMAN
				OPERATOR OR A MACHINE.
		ORIGINAL ORDER	5	RECEIPT/COMPLIANCE RESPONSE (MR AND/
				OR CANTPRO ONLY) REQUIRED.
		CANTCO (CANNOT COMPLY)	6	THE SYSTEM COMPONENT REQUIRED TO
				TAKE ACTION UNDER THIS ORDER
				CANNOT COMPLY. IN THIS USAGE, THE
				SYSTEM COMPONENT IS A HUMAN
				OPERATOR OR (UNMANNED VEHICLE
				ONLY) A MACHINE.
		CANTPRO (CANNOT PROCESS)	7	NON-SPECIFIC SYSTEM LIMITATION OR
				CONFLICT. THIS IS AN AUTOMATIC
				COMPUTER-GENERATED RESPONSE AND
				THE OPERATOR NEED NOT BE AWARE
				THAT ANY ORDER HAS BEEN RECEIVED
				OR THAT THE CANTPRO RESPONSE HAS
				BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	8	TIME SLOT ASSIGNMENT CONFLICT
				DETECTED. THIS IS AN AUTOMATIC
				COMPUTER-GENERATED RESPONSE AND
				THE OPERATOR NEED NOT BE AWARE
				THAT ANY ORDER HAS BEEN RECEIVED
				OR THAT THE CANTPRO RESPONSE HAS
				BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	9	CRYPTOVARIABLE NOT HELD. THIS IS AN
				AUTOMATIC COMPUTER-GENERATED
				RESPONSE AND THE OPERATOR NEED NOT
				BE AWARE THAT ANY ORDER HAS BEEN
				RECEIVED OR THAT THE CANTPRO

5.3-882

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
		CANTPRO (CANNOT PROCESS)	10	RESPONSE HAS BEEN GENERATED. PARTICIPATION GROUP NOT DEFINED. THIS IS AN AUTOMATIC COMPUTER- GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	11	APPLICABLE ASSIGNMENT TABLE FULL. THIS IS AN AUTOMATIC COMPUTER- GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	12	RELAY FUNCTION SPECIFIED ALREADY HAS ASSIGNED TIME SLOT BLOCKS FOR WHICH A DIFFERENT RELAY MODE/NET NUMBER HAS BEEN SPECIFIED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	13	INTERFERENCE PROTECTION FEATURES WOULD BE VIOLATED BY ACCEPTANCE OF ASSIGNMENT. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	14	HOST SUBSCRIBER INTERFACE IS INACTIVE AND MESSAGE IS NOT PROCESSED BY THE TERMINAL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	15	TN, ADDRESSEE DOES NOT IMPLEMENT THE ACTION REQUESTED. THIS IS AN AUTOMATIC COMPUTER-GENERATED

5.3-883

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
		CANTPRO (CANNOT PROCESS)	16	RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED. ONE OR MORE TNS IN THE OM NOT HELD. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	17	TN, REFERENCE OR TN, FRIENDLY WEAPON IS UNDER OWN UNIT CONTROL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	18	UNIT NOT EXERCISING AIR CONTROL CAPABILITY. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	19	UNACCEPTABLE IDENTITY. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	20	ADDRESSEE TN IS INACTIVE. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	21	THE FORWARDING UNIT DID NOT RECEIVE A MACHINE RECEIPT FROM THE ADDRESSEE TN. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN

5.3-884

MIL-STD-6016B

FIELD CODING FOR J31.0I

(SHEET 6)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
		CANTPRO (CANNOT PROCESS)	22	RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED. TN, REFERENCE OR TN, FRIENDLY WEAPON IS NOT UNDER THIS UNIT'S CONTROL. THIS IS AN AUTOMATIC COMPUTER- GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		UNDEFINED NO STATEMENT	23 THROUGH 30 31	
444	025	RECURRENCE RATE, RECEIPT/ COMPLIANCE -----		IDENTIFIES THE TIME SLOT IN WHICH THE RECEIPT/COMPLIANCE FOR THE MESSAGE IS TO BE TRANSMITTED.
		NO STATEMENT	0	
		NUMERIC	1 THROUGH 15	THE NUMERIC VALUE FOR RECEIPT/ COMPLIANCE, SPECIFIED AS RECURRENCE RATE NUMBER, DEFINES THE NUMBER N OF CONSECUTIVE TIME SLOTS FROM THE ORIGINAL TRANSMISSION TO THE DONATED TIME SLOT: N=3X2 TO THE (15-RRN) POWER.

5.3-885

MIL-STD-6016B

.....

WORD TITLE: OVER-THE-AIR REKEYING MANAGEMENT EXTENSION WORD

24	23	22	21	20	19:	18:	17	16	15	14	13	12	11:	10:	09	08	07	06	05	04	03:	02:	01	00:	
CRYPTOVARIABLE LOGICAL LABEL LOCATION, 2					:CPD:	CRYPTOVARIABLE LOGICAL LABEL LOCATION, 1					:CPD:	CRYPTOVARIABLE LOGICAL LABEL LOCATION, 0					:CPD:	WORD :FORMAT :							
					:L2 :						:L1 :						:L0 :								
					:						:						:								
7					: 1 :	7					: 1 :	7					: 1 :	2 :							
:	49	48	47	46	45	44	43:	42:	41	40	39	38	37	36	35:	34:	33	32	31	30	29	28	27:	26:	25
:	CRYPTOVARIABLE LOGICAL LABEL LOCATION, 5					:CPD:	CRYPTOVARIABLE LOGICAL LABEL LOCATION, 4					:CPD:	CRYPTOVARIABLE LOGICAL LABEL LOCATION, 3					:CPD:	:---						
:						:L5 :						:L4 :						:L3 :							
:						:						:						:							
:	7					: 1 :	7					: 1 :	7					: 1 :							
					:	69	68	67	66:	65	64	63	62	61	60	59:	58:	57	56	55	54	53	52	51:	50:
					:	CRYPTOVARIABLE LOGICAL LABEL LOCATION, 7					:CPD:	CRYPTOVARIABLE LOGICAL LABEL LOCATION, 6					:CPD:								
					:	SPARE					:L7 :						:L6 :								
					:						:						:								
					:	4					: 1 :	7					: 1 :								

WORD DESCRIPTION

WORD NUMBER: J31.0E0

WORD TITLE: OVER-THE-AIR REKEYING MANAGEMENT EXTENSION WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550 001		WORD FORMAT	0-	1 2	10
1546 001		CRYPTOPERIOD DESIGNATOR, LOCATION 0 (CPD L0)	2	1	
801 011		CRYPTOVARIABLE LOGICAL LABEL LOCATION, 0 (CVL L0)	3-	9 7	
1546 002		CRYPTOPERIOD DESIGNATOR, LOCATION 1 (CPD L1)	10	1	
801 012		CRYPTOVARIABLE LOGICAL LABEL LOCATION, 1 (CVL L1)	11-	17 7	
1546 003		CRYPTOPERIOD DESIGNATOR, LOCATION 2 (CPD L2)	18	1	
801 013		CRYPTOVARIABLE LOGICAL LABEL LOCATION, 2 (CVL L2)	19-	25 7	
1546 004		CRYPTOPERIOD DESIGNATOR, LOCATION 3 (CPD L3)	26	1	
801 014		CRYPTOVARIABLE LOGICAL LABEL LOCATION, 3 (CVL L3)	27-	33 7	
1546 005		CRYPTOPERIOD DESIGNATOR, LOCATION 4 (CPD L4)	34	1	
801 015		CRYPTOVARIABLE LOGICAL LABEL LOCATION, 4 (CVL L4)	35-	41 7	
1546 006		CRYPTOPERIOD DESIGNATOR, LOCATION 5 (CPD L5)	42	1	
801 016		CRYPTOVARIABLE LOGICAL LABEL LOCATION, 5 (CVL L5)	43-	49 7	
1546 007		CRYPTOPERIOD DESIGNATOR, LOCATION 6 (CPD L6)	50	1	
801 017		CRYPTOVARIABLE LOGICAL LABEL LOCATION, 6 (CVL L6)	51-	57 7	
1546 008		CRYPTOPERIOD DESIGNATOR, LOCATION 7 (CPD L7)	58	1	
801 018		CRYPTOVARIABLE LOGICAL LABEL LOCATION, 7 (CVL L7)	59-	65 7	
756 004		SPARE	66-	69 4	

FIELD CODING FOR J31.0E0

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1546	001	CRYPTOPERIOD DESIGNATOR, LOCATION 0 ----- ZERO ONE	0 1	THE CRYPTOPERIOD DESIGNATOR FOR THE CRYPTOVARIABLE STORED IN SDU LOCATION 0.
801	011	CRYPTOVARIABLE LOGICAL LABEL LOCATION, 0 ----- NO STATEMENT LOGICAL LABEL	0 1 THROUGH 127	THE CRYPTOVARIABLE LOGICAL LABEL OF THE CRYPTOVARIABLE STORED IN SDU LOCATION 0
1546	002	CRYPTOPERIOD DESIGNATOR, LOCATION 1 ----- ZERO ONE	0 1	THE CRYPTOPERIOD DESIGNATOR FOR THE CRYPTOVARIABLE STORED IN SDU LOCATION 1.
801	012	CRYPTOVARIABLE LOGICAL LABEL LOCATION, 1 ----- NO STATEMENT LOGICAL LABEL	0 1 THROUGH 127	THE CRYPTOVARIABLE LOGICAL LABEL OF THE CRYPTOVARIABLE STORED IN SDU LOCATION 1
1546	003	CRYPTOPERIOD DESIGNATOR, LOCATION 2 ----- ZERO ONE	0 1	THE CRYPTOPERIOD DESIGNATOR FOR THE CRYPTOVARIABLE STORED IN SDU LOCATION 2.
801	013	CRYPTOVARIABLE LOGICAL LABEL LOCATION, 2 ----- NO STATEMENT LOGICAL LABEL	0 1 THROUGH 127	THE CRYPTOVARIABLE LOGICAL LABEL OF THE CRYPTOVARIABLE STORED IN SDU LOCATION 2
1546	004	CRYPTOPERIOD DESIGNATOR, LOCATION 3 ----- ZERO ONE	0 1	THE CRYPTOPERIOD DESIGNATOR FOR THE CRYPTOVARIABLE STORED IN SDU LOCATION 3.
801	014	CRYPTOVARIABLE LOGICAL LABEL LOCATION, 3 -----		THE CRYPTOVARIABLE LOGICAL LABEL OF THE CRYPTOVARIABLE STORED IN SDU LOCATION 3

5.3-888

MIL-STD-6016B

FIELD CODING FOR J31.0E0 (SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
801	014	CRYPTOVARIABLE LOGICAL LABEL LOCATION, 3 ----- NO STATEMENT LOGICAL LABEL	(CONTINUED) 0 1 THROUGH 127	
1546	005	CRYPTOPERIOD DESIGNATOR, LOCATION 4 ----- ZERO ONE	 0 1	THE CRYPTOPERIOD DESIGNATOR FOR THE CRYPTOVARIABLE STORED IN SDU LOCATION 4.
801	015	CRYPTOVARIABLE LOGICAL LABEL LOCATION, 4 ----- NO STATEMENT LOGICAL LABEL	 0 1 THROUGH 127	THE CRYPTOVARIABLE LOGICAL LABEL OF THE CRYPTOVARIABLE STORED IN SDU LOCATION 4
1546	006	CRYPTOPERIOD DESIGNATOR, LOCATION 5 ----- ZERO ONE	 0 1	THE CRYPTOPERIOD DESIGNATOR FOR THE CRYPTOVARIABLE STORED IN SDU LOCATION 5.
801	016	CRYPTOVARIABLE LOGICAL LABEL LOCATION, 5 ----- NO STATEMENT LOGICAL LABEL	 0 1 THROUGH 127	THE CRYPTOVARIABLE LOGICAL LABEL OF THE CRYPTOVARIABLE STORED IN SDU LOCATION 5
1546	007	CRYPTOPERIOD DESIGNATOR, LOCATION 6 ----- ZERO ONE	 0 1	THE CRYPTOPERIOD DESIGNATOR FOR THE CRYPTOVARIABLE STORED IN SDU LOCATION 6.
801	017	CRYPTOVARIABLE LOGICAL LABEL LOCATION, 6 ----- NO STATEMENT LOGICAL LABEL	 0 1 THROUGH 127	THE CRYPTOVARIABLE LOGICAL LABEL OF THE CRYPTOVARIABLE STORED IN SDU LOCATION 6
1546	008	CRYPTOPERIOD DESIGNATOR, LOCATION 7 -----		THE CRYPTOPERIOD DESIGNATOR FOR THE CRYPTOVARIABLE STORED IN SDU LOCATION 7.

5.3-889

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1546	008	CRYPTOPERIOD DESIGNATOR, LOCATION 7 ----- ZERO ONE	(CONTINUED) 0 1	
801	018	CRYPTOVARIABLE LOGICAL LABEL LOCATION, 7 ----- NO STATEMENT LOGICAL LABEL	0 1 THROUGH 127	THE CRYPTOVARIABLE LOGICAL LABEL OF THE CRYPTOVARIABLE STORED IN SDU LOCATION 7

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD TITLE: OVER-THE-AIR REKEYING MANAGEMENT CONTINUATION WORD 1

[illegible]

:	69	68	67	66	65	64	63	62:	61:	60	59	58	57:	56	55	54	53	52	51	50:
:									:	CP	:	MEMORY			:	CRYPTOVARIABLE			LOGICAL	:
:	SPARE								:	IND:	:	LOCATION,			:	LABEL,			REQUEST	:
:									:	:	:	REQUEST			:					:
:	8								:	1	:	4			:	7				:

WORD DESCRIPTION

WORD NUMBER: J31.0C1
WORD TITLE: OVER-THE-AIR REKEYING MANAGEMENT CONTINUATION WORD 1

REFERENCE		BIT #	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0- 1 2	01
1551 001	CONTINUATION WORD LABEL	2- 6 5	00001
769 061	TRACK NUMBER, SPECIFIED	7- 21 15	
756 003	SPARE	22- 24 3	
1549 001	CRYPTOSTATUS INFORMATION CODE (CSI CDE)	25 1	
1677 003	SECURE DATA UNIT IDENTIFICATION NUMBER	26- 41 16	
1548 001	UNIQUE VARIABLE UPDATE NUMBER	42- 48 7	
1546 009	CRYPTOPERIOD DESIGNATOR, CURRENT (CPD CUR)	49 1	
801 001	CRYPTOVARIABLE LOGICAL LABEL, REQUEST	50- 56 7	
866 004	MEMORY LOCATION, REQUEST	57- 60 4	
875 002	CRYPTOPERIOD INDICATOR, REQUEST (CP IND)	61 1	
756 008	SPARE	62- 69 8	

FIELD CODING FOR J31.0C1

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	061	TRACK NUMBER, SPECIFIED -----		THE TN OF THE UNIT THAT IS REQUESTING THE OVER-THE-AIR REKEYING MESSAGE.
		NO STATEMENT NUMERIC	0 00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		ILLEGAL NUMERIC	00077 (OCTAL) 00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC	00177 (OCTAL)	COLLECTIVE ADDRESS.
		NUMERIC	00200 THROUGH 07776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL NUMERIC	07777 (OCTAL) 10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
1549	001	CRYPTOSTATUS INFORMATION CODE -----		INDICATES WHETHER OR NOT THE SECURE DATA UNIT IDENTIFICATION NUMBER, UNIQUE VARIABLE UPDATE NUMBER, AND CRYPTOVARIABLE DESIGNATOR, CURRENT ARE CONTAINED IN THE MESSAGE.
		NOT CONTAINED	0	
		CONTAINED	1	
1677	003	SECURE DATA UNIT IDENTIFICATION NUMBER -----		DATA PROVIDED BY THE SECURE DATA UNIT OF THE ORIGINATOR AND INSERTED IN THE MESSAGE BY THE ORIGINATOR'S TERMINAL.
		SEE DUI EXPLANATION	0 THROUGH 65535	
1548	001	UNIQUE VARIABLE UPDATE NUMBER -----		A 7 BIT NUMBER WHICH DEFINES WHICH UNIQUE VARIABLE IS CURRENTLY HELD BY THE TERMINAL.
		VARIABLE NUMBER	0 THROUGH 127	

5.3-894

MIL-STD-6016B

FIELD CODING FOR J31.0C1

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
1546	009	CRYPTOPERIOD DESIGNATOR, CURRENT ----- CURRENT CRYPTOPERIOD IS ZERO CURRENT CRYPTOPERIOD IS ONE	0 1	CRYPTOPERIOD DESIGNATOR FOR THE CURRENT CRYPTOPERIOD.
801	001	CRYPTOVARIABLE LOGICAL LABEL, REQUEST ----- NO STATEMENT LOGICAL LABEL	0 1 THROUGH 127	THE CRYPTOVARIABLE LOGICAL LABEL FOR THE CRYPTOVARIABLE BEING REQUESTED.
866	004	MEMORY LOCATION, REQUEST ----- LOCATION ILLEGAL NO STATEMENT	0 THROUGH 7 8 THROUGH 14 15	INDICATES THE MEMORY LOCATION OF THE KGV-8 IN WHICH THE REQUESTED CRYPTOVARIABLE WILL BE STORED. INDICATES A SPECIFIC LOCATION IS NOT OR CANNOT BE SPECIFIED.
875	002	CRYPTOPERIOD INDICATOR, REQUEST ----- PRESENT CRYPTOPERIOD NEXT CRYPTOPERIOD	0 1	INDICATES THE CRYPTOPERIOD FOR WHICH THE REQUESTED CRYPTOVARIABLE IS APPLICABLE.

5.3-895

MIL-STD-6016B

.....

WORD TITLE: OVER-THE-AIR REKEYING MANAGEMENT CONTINUATION WORD 2

49 48 47 46 45 44 43 42 41 40 39 38 37 36 35 34 33 32 31 30 29 28 27 26 25

39

:	69	68	67	66	65:	64:	63	62	61	60	59	58	57:	56	55	54	53	52	51	50				
:						:	CPD:	CRYPTOVARIABLE					LOGICAL					:						
:	SPARE					:	SYN:	LABEL SYNCHRONIZATION										:	--->					
:						:	:											:						
:	5					:	1	:	7										:					

WORD DESCRIPTION

WORD NUMBER: J31.0C2

WORD TITLE: OVER-THE-AIR REKEYING MANAGEMENT CONTINUATION WORD 2

REFERENCE			BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR		POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT		0-	1 2	01
1551 001	CONTINUATION WORD LABEL		2-	6 5	00010
866 003	MEMORY LOCATION, REKEY		7-	9 3	
801 004	CRYPTOVARIABLE LOGICAL LABEL, REKEY		10-	16 7	
1546 010	CRYPTOPERIOD DESIGNATOR, REKEY (CPD RKY)		17	1	
887 001	CRYPTOVARIABLE SYNCHRONIZATION BITS		18-	56 39	
801 005	CRYPTOVARIABLE LOGICAL LABEL SYNCHRONIZATION		57-	63 7	
1546 011	CRYPTOPERIOD DESIGNATOR, SYNCHRONIZATION (CPD SYN)		64	1	
756 005	SPARE		65-	69 5	

FIELD CODING FOR J31.0C2

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
866	003	MEMORY LOCATION, REKEY -----		INDICATES MEMORY LOCATIONS OF THE KGV-8 IN WHICH THE CRYPTOVARIABLE TO BE REKEYED IS STORED.
		LOCATION	0 THROUGH 7	
801	004	CRYPTOVARIABLE LOGICAL LABEL, REKEY -----		THE CRYPTOVARIABLE LOGICAL LABEL OF THE CRYPTOVARIABLE THAT IS TO BE REKEYED.
		ILLEGAL	0	
		LOGICAL LABEL	1 THROUGH 127	
1546	010	CRYPTOPERIOD DESIGNATOR, REKEY -----		THE CRYPTOPERIOD DESIGNATOR OF THE CRYPTOVARIABLE THAT IS TO BE REKEYED.
		ZERO	0	
		ONE	1	
887	001	CRYPTOVARIABLE SYNCHRONIZATION BITS -----		PROVIDES THE MONOTONIC BITS TO THE KGV-8 IN ORDER FOR THE KGV-8 TO PROCESS THE PARTICULAR CRYPTOVARIABLE.
		AS REQUIRED		
801	005	CRYPTOVARIABLE LOGICAL LABEL SYNCHRONIZATION -----		THE CRYPTOVARIABLE LOGICAL LABEL OF THE CRYPTOVARIABLE TO BE USED FOR REKEY SYNCHRONIZATION.
		NO STATEMENT	0	
		LOGICAL LABEL	1 THROUGH 127	
1546	011	CRYPTOPERIOD DESIGNATOR, SYNCHRONIZATION -----		THE CRYPTOPERIOD DESIGNATOR OF THE CRYPTOVARIABLE TO BE USED FOR REKEY SYNCHRONIZATION.
		ZERO	0	
		ONE	1	

5.3-898

MIL-STD-6016B

MIL-STD-6016B

J31.1 MESSAGE SUMMARY

PURPOSE

The J31.1 Over-the-air Rekeying Message is used to transmit the new cryptovariables.

DATA ELEMENT SUMMARY

<u>J31.1I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
TRACK NUMBER, ADDRESSEE	15
ACTION CODE, OVER-THE-AIR REKEYING	4
MEMORY LOCATION, REKEY	3
CRYPTOVARIABLE LOGICAL LABEL, REKEY	7
CRYPTOPERIOD DESIGNATOR, REKEY	1
CRYPTOVARIABLE, PART I	18
RECEIPT/COMPLIANCE	5
RECURRENCE RATE, RECEIPT/ COMPLIANCE	4

<u>J31.1E0</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
CRYPTOVARIABLE, PART II	68

<u>J31.1E1</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
CRYPTOVARIABLE, PART III	68

MIL-STD-6016B

J31.1 TRANSMIT/RECEIVE RULES

TITLE: Over-the-Air Rekeying Message

TRANSMIT RULES

1. The J31.1 Over-the-Air Rekeying message will be transmitted by the designated cryptonet manager when a J31.0 Over-the-Air Rekeying Management message (ACT = 1, 6, or 7) has been sent. In this case the Action Code, Over-the-Air Rekeying field must be the same as in the associated J31.0 message.
2. The J31.1 message may be transmitted without a prior J31.0 message when the 39 cryptovvariable synchronization bits and the synchronization cryptovvariable logical label are not required to be transmitted and the execution time is immediate. In this case the Action Code, Over-the-Air Rekeying field must be set to 0.
3. The cryptonet manager shall provide the terminal with the time slot that shall be used to transmit the J31.1 message when the J31.1 message is transmitted without a J31.0 message.
4. When the J31.1 Over-the-Air Rekeying message follows a J31.0 Over-the-Air Rekeying Management message (ACT = 6 or 7), the J31.1 message shall be in the same time slot as the J31.0 message. The terminal provides an R/C response to the J31.0 (ACT = 6) Packed OTAR message, and in the same time slot includes the J31.1 (ACT = 6) message with values in each field of the J31.1 which are unchanged from those received. The terminal does not provide an R/C response for the J31.0 (ACT = 7) Packed OTMR message or for the J31.1 (ACT = 7) that follows it in the same time slot.

RECEIVE RULES

1. The terminal shall transmit a machine receipt J31.1 message (R/C = 2) when this message (ACT = 0 or 1) is accepted.
2. The 39 cryptovvariable synchronization bits used for over-the-air rekeying shall be those 39 bits used to synchronize the encryption of the original

MIL-STD-6016B

J31.1 TRANSMIT/RECEIVE RULES (Continued)

RECEIVE RULES (Continued)

transmission of the J31.1 message and the synchronization cryptovvariable logical label shall be system defined when the J31.1 message is received without prior receipt of a J31.0 message.

3. At the execution time specified in the ACT = 0 or 1 message:

a. The terminal will transmit an appropriate CANTPRO J31.1 message if the KGV-8 cannot process the cryptovvariable.

b. The terminal will transmit a HAVCO J31.1 message when the KGV-8 properly processes the cryptovvariable.

WORD MAP

WORD NUMBER: J31.1I

WORD TITLE: OVER-THE-AIR REKEYING INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00		
TRACK NUMBER, ADDRESSEE												:	MESSAGE	:	SUBLABEL,	:							:	WORD	:	
												:	LENGTH	:	J-SERIES	:	LABEL, J-SERIES	:	FORMAT	:			:		:	
												:	INDICATOR	:		:							:		:	
15												:	3	:	3	:	5	:	2	:			:		:	
49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25		
<---						:	CPD:	CRYPTOVARIABLE LOGICAL				:	MEMORY	:	ACTION CODE,				:							
						:	RKY:	LABEL, REKEY				:	LOCATION,	:	OVER-THE-AIR				:						---	
						:						:	REKEY	:	REKEYING				:							
						:	1	:			7	:	3	:			4	:								
						:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50
						:	RECURRENCE				:						:									
						:	RATE, RECEIPT/				:	RECEIPT/COMPLIANCE				:	CRYPTOVARIABLE, PART I				:					
						:	COMPLIANCE				:						:									
						:		4	:			5	:						18	:						

WORD DESCRIPTION

WORD NUMBER: J31.1I

WORD TITLE: OVER-THE-AIR REKEYING INITIAL WORD

REFERENCE	DFI/DUI	DATA FIELD DESCRIPTOR	BIT POSITION	# BITS	RESOLUTION, CODING, ETC
1550	001	WORD FORMAT	0-	1 2	00
270	004	LABEL, J-SERIES	2-	6 5	11111
271	005	SUBLABEL, J-SERIES	7-	9 3	000
800	001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
769	006	TRACK NUMBER, ADDRESSEE	13-	27 15	
876	001	ACTION CODE, OVER-THE-AIR REKEYING (AC)	28-	31 4	
866	003	MEMORY LOCATION, REKEY	32-	34 3	
801	004	CRYPTOVARIABLE LOGICAL LABEL, REKEY	35-	41 7	
1546	010	CRYPTOPERIOD DESIGNATOR, REKEY (CPD RKY)	42	1	
885	001	CRYPTOVARIABLE, PART I	43-	60 18	
392	008	RECEIPT/COMPLIANCE	61-	65 5	
444	025	RECURRENCE RATE, RECEIPT/ COMPLIANCE (RRN R/C)	66-	69 4	

FIELD CODING FOR J31.1I

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
769	006	TRACK NUMBER, ADDRESSEE -----		THE TN OF A UNIT (I.E., JU OR PU) TO WHICH A MESSAGE IS ADDRESSED.
		NO STATEMENT NUMERIC	0 00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
		ILLEGAL NUMERIC	00077 (OCTAL) 00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
		NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
		NUMERIC NUMERIC	00177 (OCTAL) 00200 THROUGH 07776 (OCTAL)	COLLECTIVE ADDRESS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
		ILLEGAL NUMERIC	07777 (OCTAL) 10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS.
		NUMERIC	77777 (OCTAL)	ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
876	001	ACTION CODE, OVER-THE-AIR REKEYING -----		DEFINES THE ACTIONS TO BE PERFORMED BY THE RECEIVING SYSTEM UPON RECEIPT OF AN OVER-THE-AIR REKEYING MANAGEMENT MESSAGE, AND DEFINES REPORT TRANSMITTED IN RESPONSE TO AN OVER-THE-AIR REKEYING MANAGEMENT MESSAGE.
		CHANGE CRYPTOVARIABLE IMMEDIATELY	0	ILLEGAL FOR THE J31.0 MESSAGE.
		CHANGE CRYPTOVARIABLE AT TIME SPECIFIED	1	THE J31.1 MESSAGE WILL FOLLOW IN A SEPARATE TIME SLOT.
		CRYPTOVARIABLE STATUS REPORT	2	THIS REPORT IS TRANSMITTED IN RESPONSE TO A CRYPTOVARIABLE STATUS REQUEST. ILLEGAL FOR THE J31.1 MESSAGE.
		DIRECT CRYPTOVARIABLE REQUEST	3	REKEY THE REQUESTING UNIT INDICATED BY THE SOURCE TN WITH THE CRYPTOVARIABLE INDICATED IN THE J31.0C1 WORD. ILLEGAL FOR THE J31.1 MESSAGE.

FIELD CODING FOR J31.1I

(SHEET 2)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
876	001	ACTION CODE, OVER-THE-AIR REKEYING -----	(CONTINUED)	
		INDIRECT CRYPTOVARIABLE REQUEST	4	REKEY THE UNIT INDICATED BY THE TN SPECIFIED WITH THE CRYPTOVARIABLE INDICATED IN THE J31.0C1 WORD. ILLEGAL FOR THE J31.1 MESSAGE.
		CRYPTOVARIABLE STATUS REQUEST	5	SUBMIT A CRYPTOVARIABLE STATUS REPORT. ILLEGAL FOR THE J31.1 MESSAGE.
		PACKED OTAR	6	CHANGE CRYPTOVARIABLE AT TIME SPECIFIED. MESSAGE GENERATED BY THE SYSTEM CONTROLLER TO REKEY REMOTE JUS WHEN THE EXECUTION TIME IS OTHER THAN IMMEDIATE.
		PACKED OTMR	7	CHANGE CRYPTOVARIABLE AT TIME SPECIFIED. MESSAGE GENERATED BY THE SYSTEM CONTROLLER TO REKEY ITS OWN TERMINAL WHEN EXECUTION TIME IS OTHER THAN IMMEDIATE.
		UNDEFINED RESERVED FOR CLASS 1	8 THROUGH 13 14 THROUGH 15	
866	003	MEMORY LOCATION, REKEY -----		INDICATES MEMORY LOCATIONS OF THE KGV-8 IN WHICH THE CRYPTOVARIABLE TO BE REKEYED IS STORED.
		LOCATION	0 THROUGH 7	
801	004	CRYPTOVARIABLE LOGICAL LABEL, REKEY -----		THE CRYPTOVARIABLE LOGICAL LABEL OF THE CRYPTOVARIABLE THAT IS TO BE REKEYED.
		ILLEGAL LOGICAL LABEL	0 1 THROUGH 127	
1546	010	CRYPTOPERIOD DESIGNATOR, REKEY -----		THE CRYPTOPERIOD DESIGNATOR OF THE CRYPTOVARIABLE THAT IS TO BE REKEYED.
		ZERO	0	
		ONE	1	
885	001	CRYPTOVARIABLE, PART I -----		PART ONE OF THREE PARTS OF THE CRYPTOVARIABLE CONSISTING OF BITS ZERO THROUGH 17 OF THE 154 BITS REQUIRED.
		AS REQUIRED		

5.3-905

MIL-STD-6016B

FIELD CODING FOR J31.1I

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----		
		ORIGINAL ORDER	0	RECEIPT/COMPLIANCE RESPONSE REQUIRED.
		ORIGINAL ORDER	1	RECEIPT/COMPLIANCE RESPONSE NOT REQUIRED. MUST BE USED IN CONJUNCTION WITH ORIGINAL ORDER MESSAGES ADDRESSED TO COLLECTIVE ADDRESSES. THE ORIGINAL ORDER SHALL BE TRANSMITTED 3 TIMES.
		MACHINE RECEIPT	2	MESSAGE RECEIVED ERROR FREE.
		WILCO (WILL COMPLY)	3	THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER WILL COMPLY. IN THIS USAGE, THE SYSTEM COMPONENT IS A HUMAN OPERATOR OR (UNMANNED VEHICLE ONLY) A MACHINE.
		HAVCO (HAVE COMPLIED)	4	THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER HAS COMPLIED. IN THIS USAGE, THE SYSTEM COMPONENT MAY BE A HUMAN OPERATOR OR A MACHINE.
		ORIGINAL ORDER	5	RECEIPT/COMPLIANCE RESPONSE (MR AND/ OR CANTPRO ONLY) REQUIRED.
		CANTCO (CANNOT COMPLY)	6	THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER CANNOT COMPLY. IN THIS USAGE, THE SYSTEM COMPONENT IS A HUMAN OPERATOR OR (UNMANNED VEHICLE ONLY) A MACHINE.
		CANTPRO (CANNOT PROCESS)	7	NON-SPECIFIC SYSTEM LIMITATION OR CONFLICT. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	8	TIME SLOT ASSIGNMENT CONFLICT DETECTED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	9	CRYPTOVARIABLE NOT HELD. THIS IS AN AUTOMATIC COMPUTER-GENERATED

5.3-906

MIL-STD-6016B

FIELD CODING FOR J31.1I

(SHEET 4)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	

CANTPRO (CANNOT PROCESS) 10

RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED. PARTICIPATION GROUP NOT DEFINED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.

CANTPRO (CANNOT PROCESS) 11

APPLICABLE ASSIGNMENT TABLE FULL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.

CANTPRO (CANNOT PROCESS) 12

RELAY FUNCTION SPECIFIED ALREADY HAS ASSIGNED TIME SLOT BLOCKS FOR WHICH A DIFFERENT RELAY MODE/NET NUMBER HAS BEEN SPECIFIED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.

CANTPRO (CANNOT PROCESS) 13

INTERFERENCE PROTECTION FEATURES WOULD BE VIOLATED BY ACCEPTANCE OF ASSIGNMENT. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.

CANTPRO (CANNOT PROCESS) 14

HOST SUBSCRIBER INTERFACE IS INACTIVE AND MESSAGE IS NOT PROCESSED BY THE TERMINAL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.

5.3-907

MIL-STD-6016B

FIELD CODING FOR J31.1I

(SHEET 5)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
		CANTPRO (CANNOT PROCESS)	15	TN, ADDRESSEE DOES NOT IMPLEMENT THE ACTION REQUESTED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	16	ONE OR MORE TNS IN THE OM NOT HELD. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	17	TN, REFERENCE OR TN, FRIENDLY WEAPON IS UNDER OWN UNIT CONTROL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	18	UNIT NOT EXERCISING AIR CONTROL CAPABILITY. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	19	UNACCEPTABLE IDENTITY. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	20	ADDRESSEE TN IS INACTIVE. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		CANTPRO (CANNOT PROCESS)	21	THE FORWARDING UNIT DID NOT RECEIVE A MACHINE RECEIPT FROM THE ADDRESSEE TN. THIS IS AN

5.3-908

MIL-STD-6016B

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
392	008	RECEIPT/COMPLIANCE -----	(CONTINUED)	
		CANTPRO (CANNOT PROCESS)	22	AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED. TN, REFERENCE OR TN, FRIENDLY WEAPON IS NOT UNDER THIS UNIT'S CONTROL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
		UNDEFINED NO STATEMENT	23 THROUGH 30 31	
444	025	RECURRENCE RATE, RECEIPT/ COMPLIANCE -----		IDENTIFIES THE TIME SLOT IN WHICH THE RECEIPT/COMPLIANCE FOR THE MESSAGE IS TO BE TRANSMITTED.
		NO STATEMENT	0	
		NUMERIC	1 THROUGH 15	THE NUMERIC VALUE FOR RECEIPT/COMPLIANCE, SPECIFIED AS RECURRENCE RATE NUMBER, DEFINES THE NUMBER N OF CONSECUTIVE TIME SLOTS FROM THE ORIGINAL TRANSMISSION TO THE DONATED TIME SLOT: N=3X2 TO THE (15-RRN) POWER.

WORD MAP

WORD NUMBER: J31.1E0
WORD TITLE: OVER-THE-AIR REKEYING EXTENSION WORD 1

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00	
																						: WORD :			
<---																						:FORMAT :			
																						:			
																						: 2 :			

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

CRYPTOVARIABLE, PART II

68																							
----	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50		
:																					---	>
:																						
:																						
:																						
:																						

WORD DESCRIPTION

WORD NUMBER: J31.1E0
WORD TITLE: OVER-THE-AIR REKEYING EXTENSION WORD 1

REFERENCE		BIT #		RESOLUTION, CODING, ETC
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	
1550 001	WORD FORMAT	0-	1 2	10
885 002	CRYPTOVARIABLE, PART II	2-	69 68	CONTINUATION OF CRYPTOVARIABLE.

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
885	002	CRYPTOVARIABLE, PART II -----		PART TWO OF THREE PARTS OF THE CRYPTOVARIABLE CONSISTING OF BITS 18 THROUGH 85 OF THE 154 BITS REQUIRED.
		AS REQUIRED		

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J31.1E1

WORD TITLE: OVER-THE-AIR REKEYING EXTENSION WORD 2

```
-----
 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 09 08 07 06 05 04 03 02: 01 00:
-----
                                     : WORD  :
<---                               :FORMAT :
                                     :       :
-----
                                     :   2   :
-----
```

```
-----
 49 48 47 46 45 44 43 42 41 40 39 38 37 36 35 34 33 32 31 30 29 28 27 26 25
-----
```

CRYPTOVARIABLE, PART III

```
-----
                                68
-----
```

```
-----
: 69 68 67 66 65 64 63 62 61 60 59 58 57 56 55 54 53 52 51 50
-----
:
:
:
:
-----
:
-----
```

WORD DESCRIPTION

WORD NUMBER: J31.1E1
WORD TITLE: OVER-THE-AIR REKEYING EXTENSION WORD 2

REFERENCE		BIT #		RESOLUTION, CODING, ETC
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	
1550 001	WORD FORMAT	0-	1 2	10
885 003	CRYPTOVARIABLE, PART III	2-	69 68	CONTINUATION OF CRYPTOVARIABLE.

FIELD CODING FOR J31.1E1 (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
885	003	CRYPTOVARIABLE, PART III -----		PART THREE OF THREE PARTS OF THE CRYPTOVARIABLE CONSISTING OF BITS 86 THROUGH 153 OF THE 154 BITS REQUIRED.
		AS REQUIRED		

MIL-STD-6016B

J31.7 MESSAGE SUMMARY

PURPOSE

The J31.7 No Statement Message is used to fill out the remainder of a transmission opportunity when the messages to be transmitted do not require the full number of Reed-Solomon code words.

DATA ELEMENT SUMMARY

<u>J31.7I</u>	
DATA ELEMENT	# BITS
WORD FORMAT	2
LABEL, J-SERIES	5
SUBLABEL, J-SERIES	3
MESSAGE LENGTH INDICATOR	3
SPARE	57

MIL-STD-6016B

J31.7 TRANSMIT/RECEIVE RULES

TITLE: No Statement Message

TRANSMIT RULES

The J31.7 No Statement message shall be transmitted following the completion of a J series message or messages that do not fill a time slot. One J31.7I No Statement initial word shall be transmitted to fill each Reed- Solomon code word that is not used to transmit information.

RECEIVE RULES

There are no receive rules specified for this message.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: J31.7I

WORD TITLE: NO STATEMENT INITIAL WORD

24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00
												:	MESSAGE	:	SUBLABEL,	:						:	WORD	:
<---												:	LENGTH	:	J-SERIES	:	LABEL,	J-SERIES	:	FORMAT	:			
												:	INDICATOR	:						:		:		
												:	3	:	3	:	5	:	2	:				

49	48	47	46	45	44	43	42	41	40	39	38	37	36	35	34	33	32	31	30	29	28	27	26	25
----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----

SPARE

57																							

:	69	68	67	66	65	64	63	62	61	60	59	58	57	56	55	54	53	52	51	50
:																				
:																				
:																				
:																				

--->

WORD DESCRIPTION

WORD NUMBER: J31.7I

WORD TITLE: NO STATEMENT INITIAL WORD

REFERENCE		BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR	POSITION	BITS	RESOLUTION, CODING, ETC
1550 001	WORD FORMAT	0-	1 2	00
270 004	LABEL, J-SERIES	2-	6 5	11111
271 005	SUBLABEL, J-SERIES	7-	9 3	111
800 001	MESSAGE LENGTH INDICATOR	10-	12 3	0 NO ADDITIONAL WORDS. 1-7 NUMBER OF ADDITIONAL WORDS.
756 057	SPARE	13-	69 57	

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

TABLE RTT-1. RTT Round-Trip-Timing Word Applicability Table

INITIAL WORD	SUBLABEL							
	RTT-A INTERROGATION ADDRESSED	RTT-B INTERROGATION BROADCAST	RTT-REP REPLY					
EXTENSION WORD - 0								
CONTINUATION WORD - 0								
...								
...								
...								
...								
...								
...								
...								
...								
31								

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

RTT-A MESSAGE SUMMARY

PURPOSE

The RTT Interrogation-Addressed message provides the means for a JTIDS/MIDS terminal to synchronize with system time using the active synchronization procedure. A specific terminal is interrogated and responds with the RTT Reply.

DATA ELEMENT SUMMARY

<u>DATA ELEMENT</u>	<u>RTT-A</u>	<u># BITS</u>
TIME SLOT TYPE		3
RTT INTERROGATION TYPE		1
TRACK NUMBER, ADDRESSEE		15
SECURE DATA UNIT SERIAL NUMBER		16

MIL-STD-6016B

RTT-A TRANSMIT/RECEIVE RULES

TITLE: RTT Interrogation-Addressed Message

TRANSMIT RULES

1. The RTT Interrogation - Addressed shall be transmitted as required to execute the active synchronization procedure.
2. When transmitted, the RTT Interrogation - Addressed shall be addressed to a specific terminal whose time quality is greater than that of the interrogating terminal.
3. The RTT Interrogation - Addressed shall be transmitted only to terminals that are within line of sight and are nonsimulated as determined by the examination of received J2 PPLI messages.

RECEIVE RULES

Upon the receipt of an RTT Interrogation - Addressed, a terminal shall respond with an RTT Reply in accordance with the transmit rules specified for the RTT Reply.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: RTT Interrogation-Addressed Message

<---	:		:RTT:	TIME SLOT	:
	:	TRACK NUMBER, ADDRESSEE	:TYP:	TYPE	:
	:		:	:	:

	:	15	: 1 :	3	:

34	33	32	31	30	29	28	27	26	25
SECURE DATA UNIT SERIAL NUMBER									
16									

WORD DESCRIPTION

WORD NUMBER: RTT-A

WORD TITLE: RTT Interrogation-Addressed Message

REFERENCE			BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR		POSITION	BITS	RESOLUTION, CODING, ETC
265 002	TIME SLOT TYPE		0-	2 3	010
844 001	RTT INTERROGATION TYPE		3	1	0
	(RTT TYP)				
769 006	TRACK NUMBER, ADDRESSEE		4-	18 15	
1677 001	SECURE DATA UNIT SERIAL NUMBER		19-	34 16	

			FIELD CODING FOR RTT-A		(SHEET 1)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION	
265	002	TIME SLOT TYPE -----		WHEN INTERPRETED WITH THE TYPE MODIFICATION FIELD, THIS FIELD DESCRIBES THE CHARACTERISTICS OF A TIME SLOT.	
		TYPE 0	0	1. WHEN THE TYPE MODIFICATION IS ZERO AND THE HEADER IS INTERLEAVED, THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS: (A) MESSAGE PACKAGE STRUCTURE: STANDARD DOUBLE PULSE. (B) MESSAGE FORMAT: FREE TEXT. (C) ERROR CORRECTION CODING: UNCODED.	
		TYPE 1	1	2. WHEN THE TYPE MODIFICATION IS ONE AND THE HEADER IS INTERLEAVED, THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS: (A) MESSAGE PACKAGE STRUCTURE: PACKED 2 SINGLE-PULSE. (B) MESSAGE FORMAT: FREE TEXT. (C) ERROR CORRECTION CODING: UNCODED.	
		TYPE 2	2	1. WHEN THE TYPE MODIFICATION IS ZERO AND THE HEADER IS INTERLEAVED, THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS: (A) MESSAGE PACKAGE STRUCTURE: PACKED 2 DOUBLE PULSE. (B) MESSAGE FORMAT: FREE TEXT. (C) ERROR CORRECTION CODING: UNCODED.	
				2. WHEN THE TYPE MODIFICATION IS ONE AND THE HEADER IS INTERLEAVED, THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS: (A) MESSAGE PACKAGE STRUCTURE: PACKED 4 SINGLE PULSE. (B) MESSAGE FORMAT: FREE TEXT. (C) ERROR CORRECTION CODING: UNCODED.	
				1. WHEN THE TYPE MODIFICATION IS ZERO AND THE HEADER IS INTERLEAVED, THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS: (A) MESSAGE PACKAGE STRUCTURE:	

			FIELD CODING FOR RTT-A		(SHEET 2)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION	
265	002	TIME SLOT TYPE -----	(CONTINUED)		
				PACKED 2 DOUBLE PULSE. (B) MESSAGE FORMAT: FREE TEXT. (C) ERROR CORRECTION CODING: CODED.	
				2. WHEN THE TYPE MODIFICATION IS ONE AND THE HEADER IS INTERLEAVED, THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS: (A) MESSAGE PACKAGE STRUCTURE: PACKED 4 SINGLE PULSE. (B) MESSAGE FORMAT: FREE TEXT. (C) ERROR CORRECTION CODING: CODED.	
				3. WHEN THE TYPE MODIFICATION IS ZERO AND THE HEADER IS NOT INTERLEAVED, THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS: (A) MESSAGE PACKAGE STRUCTURE: RTT. (B) MESSAGE FORMAT: ADDRESSED. (C) ERROR CORRECTION CODING: CODED.	
				4. WHEN THE TYPE MODIFICATION IS ONE AND THE HEADER IS NOT INTERLEAVED, THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS: (A) MESSAGE PACKAGE STRUCTURE: RTT. (B) MESSAGE FORMAT: BROADCAST. (C) ERROR CORRECTION CODING: CODED.	
		TYPE 3	3	THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS: (A) MESSAGE PACKAGE STRUCTURE: PACKED 2 SINGLE PULSE. (B) MESSAGE FORMAT: FIXED FORMAT. (C) ERROR CORRECTION CODING: CODED.	
		TYPE 4	4	THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS: (A) MESSAGE PACKAGE STRUCTURE: STANDARD DOUBLE PULSE.	

5.3-932

			FIELD CODING FOR RTT-A		(SHEET 3)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION	
265	002	TIME SLOT TYPE -----	(CONTINUED)		
		TYPE 5	5	(B) MESSAGE FORMAT: FIXED FORMAT. (C) ERROR CORRECTION CODING: CODED. THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS: (A) MESSAGE PACKAGE STRUCTURE: PACKED 2 DOUBLE PULSE. (B) MESSAGE FORMAT: FIXED FORMAT. (C) ERROR CORRECTION CODING: CODED.	
		TYPE 6	6	1. WHEN THE TYPE MODIFICATION IS ZERO AND THE HEADER IS INTER- LEAVED, THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS: (A) MESSAGE PACKAGE STRUCTURE: STANDARD DOUBLE PULSE. (B) MESSAGE FORMAT: FREE TEXT. (C) ERROR CORRECTION CODING: CODED. 2. WHEN THE TYPE MODIFICATION IS ONE AND THE HEADER IS INTERLEAVED, THE TIME SLOT HAS THE FOLLOWING STRUCTURE: (A) MESSAGE PACKAGE STRUCTURE: PACKED 2 SINGLE PULSE. (B) MESSAGE FORMAT: FREE TEXT. (C) ERROR CORRECTION CODING: CODED.	
		TYPE 7	7	THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS: (A) MESSAGE PACKAGE STRUCTURE: PACKED 4 SINGLE PULSE. (B) MESSAGE FORMAT: FIXED FORMAT. (C) ERROR CORRECTION CODING: CODED.	
844	001	RTT INTERROGATION TYPE -----		SPECIFIES WHETHER AN RTT INTERROGA- TION MESSAGE IS AN ADDRESSED OR A BROADCAST MESSAGE.	
		ADDRESSED MESSAGE	0		

MIL-STD-6016B

5.3-933

			FIELD CODING FOR RTT-A	(SHEET 4)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
844	001	RTT INTERROGATION TYPE ----- BROADCAST MESSAGE	(CONTINUED) 1	
769	006	TRACK NUMBER, ADDRESSEE ----- NO STATEMENT NUMERIC ILLEGAL NUMERIC NUMERIC NUMERIC NUMERIC ILLEGAL NUMERIC NUMERIC	0 00001 THROUGH 00076 (OCTAL) 00077 (OCTAL) 00100 THROUGH 00175 (OCTAL) 00176 (OCTAL) 00177 (OCTAL) 00200 THROUGH 07776 (OCTAL) 07777 (OCTAL) 10000 THROUGH 77776 (OCTAL) 77777 (OCTAL)	THE TN OF A UNIT (I.E., JU OR PU) TO WHICH A MESSAGE IS ADDRESSED. ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU). ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU). RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS. COLLECTIVE ADDRESS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS. ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
1677	001	SECURE DATA UNIT SERIAL NUMBER ----- SEE DUI EXPLANATION	0 THROUGH 65535	DATA INSERTED BY SOURCE SECURE DATA UNIT OF THE ORIGINATOR AND CAN BE INTERPRETED ONLY BY THE SECURE DATA UNIT.

MIL-STD-6016B

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

RTT-B MESSAGE SUMMARY

PURPOSE

The RTT Interrogation-Broadcast message provides the means for a JTIDS/MIDS terminal to synchronize with system time using the active synchronization procedure. The RTT-B is not addressed to any particular terminal. Any terminal that meets the specified requirement for time quality level responds with the RTT Reply.

DATA ELEMENT SUMMARY

<u>DATA ELEMENT</u>	<u>RTT-B</u>	<u># BITS</u>
TIME SLOT TYPE		3
RTT INTERROGATION TYPE		1
SPARE		11
TIME QUALITY		4
SECURE DATA UNIT SERIAL NUMBER		16

MIL-STD-6016B

RTT-B TRANSMIT/RECEIVE RULES

TITLE: RTT Interrogation-Broadcast Message

TRANSMIT RULES

1. The RTT Interrogation - Broadcast shall be transmitted as required to execute the active synchronization procedure. This interrogation shall be transmitted in the contention access mode on the net whose number corresponds to the time quality number contained in the J2 PPLI message of the best candidate RTT JU.
2. When transmitted, the RTT Interrogation - Broadcast shall be transmitted specifying a time quality value greater than that of the interrogating terminal but not greater than that of the highest time quality of other terminals as determined by the receipt of J2 messages.

RECEIVE RULES

Upon the receipt of a RTT Interrogation - Broadcast whose specified time quality value is equal to its own time quality, a terminal shall respond with a RTT Reply in accordance with the transmit rules specified for the RTT Reply.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

.....

WORD TITLE: RTT Interrogation-Broadcast Message

```

-----
: 34 33 32 31 30 29 28 27 26 25
-----
:
:      SECURE DATA UNIT SERIAL NUMBER
:
-----
:                      16
-----

```

WORD DESCRIPTION

WORD NUMBER: RTT-B

WORD TITLE: RTT Interrogation-Broadcast Message

REFERENCE			BIT	#	
DFI/DUI	DATA FIELD DESCRIPTOR		POSITION	BITS	RESOLUTION, CODING, ETC
265 002	TIME SLOT TYPE		0-	2 3	010
844 001	RTT INTERROGATION TYPE		3	1	1
	(RTT TYP)				
756 011	SPARE		4-	14 11	
279 001	TIME QUALITY		15-	18 4	
1677 001	SECURE DATA UNIT SERIAL NUMBER		19-	34 16	

FIELD CODING FOR RTT-B

(SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
265	002	TIME SLOT TYPE -----		WHEN INTERPRETED WITH THE TYPE MODIFICATION FIELD, THIS FIELD DESCRIBES THE CHARACTERISTICS OF A TIME SLOT.
		TYPE 0	0	1. WHEN THE TYPE MODIFICATION IS ZERO AND THE HEADER IS INTERLEAVED, THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS: (A) MESSAGE PACKAGE STRUCTURE: STANDARD DOUBLE PULSE. (B) MESSAGE FORMAT: FREE TEXT. (C) ERROR CORRECTION CODING: UNCODED. 2. WHEN THE TYPE MODIFICATION IS ONE AND THE HEADER IS INTERLEAVED, THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS: (A) MESSAGE PACKAGE STRUCTURE: PACKED 2 SINGLE-PULSE. (B) MESSAGE FORMAT: FREE TEXT. (C) ERROR CORRECTION CODING: UNCODED.
		TYPE 1	1	1. WHEN THE TYPE MODIFICATION IS ZERO AND THE HEADER IS INTERLEAVED, THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS: (A) MESSAGE PACKAGE STRUCTURE: PACKED 2 DOUBLE PULSE. (B) MESSAGE FORMAT: FREE TEXT. (C) ERROR CORRECTION CODING: UNCODED. 2. WHEN THE TYPE MODIFICATION IS ONE AND THE HEADER IS INTERLEAVED, THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS: (A) MESSAGE PACKAGE STRUCTURE: PACKED 4 SINGLE PULSE. (B) MESSAGE FORMAT: FREE TEXT. (C) ERROR CORRECTION CODING: UNCODED.
		TYPE 2	2	1. WHEN THE TYPE MODIFICATION IS ZERO AND THE HEADER IS INTERLEAVED, THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS: (A) MESSAGE PACKAGE STRUCTURE:

FIELD CODING FOR RTT-B			(SHEET 2)
DFI	DUI	DUI/DI NAME	DUI/DI EXPLANATION
265	002	TIME SLOT TYPE -----	(CONTINUED)
			PACKED 2 DOUBLE PULSE. (B) MESSAGE FORMAT: FREE TEXT. (C) ERROR CORRECTION CODING: CODED. 2. WHEN THE TYPE MODIFICATION IS ONE AND THE HEADER IS INTERLEAVED, THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS: (A) MESSAGE PACKAGE STRUCTURE: PACKED 4 SINGLE PULSE. (B) MESSAGE FORMAT: FREE TEXT. (C) ERROR CORRECTION CODING: CODED. 3. WHEN THE TYPE MODIFICATION IS ZERO AND THE HEADER IS NOT INTERLEAVED, THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS: (A) MESSAGE PACKAGE STRUCTURE: RTT. (B) MESSAGE FORMAT: ADDRESSED. (C) ERROR CORRECTION CODING: CODED. 4. WHEN THE TYPE MODIFICATION IS ONE AND THE HEADER IS NOT INTERLEAVED, THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS: (A) MESSAGE PACKAGE STRUCTURE: RTT. (B) MESSAGE FORMAT: BROADCAST. (C) ERROR CORRECTION CODING: CODED. THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS: (A) MESSAGE PACKAGE STRUCTURE: PACKED 2 SINGLE PULSE. (B) MESSAGE FORMAT: FIXED FORMAT. (C) ERROR CORRECTION CODING: CODED. THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS: (A) MESSAGE PACKAGE STRUCTURE: STANDARD DOUBLE PULSE.
		TYPE 3	3
		TYPE 4	4

FIELD CODING FOR RTT-B

(SHEET 3)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
265	002	TIME SLOT TYPE -----	(CONTINUED)	
		TYPE 5	5	(B) MESSAGE FORMAT: FIXED FORMAT. (C) ERROR CORRECTION CODING: CODED. THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS: (A) MESSAGE PACKAGE STRUCTURE: PACKED 2 DOUBLE PULSE. (B) MESSAGE FORMAT: FIXED FORMAT. (C) ERROR CORRECTION CODING: CODED.
		TYPE 6	6	1. WHEN THE TYPE MODIFICATION IS ZERO AND THE HEADER IS INTER- LEAVED, THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS: (A) MESSAGE PACKAGE STRUCTURE: STANDARD DOUBLE PULSE. (B) MESSAGE FORMAT: FREE TEXT. (C) ERROR CORRECTION CODING: CODED. 2. WHEN THE TYPE MODIFICATION IS ONE AND THE HEADER IS INTERLEAVED, THE TIME SLOT HAS THE FOLLOWING STRUCTURE: (A) MESSAGE PACKAGE STRUCTURE: PACKED 2 SINGLE PULSE. (B) MESSAGE FORMAT: FREE TEXT. (C) ERROR CORRECTION CODING: CODED.
		TYPE 7	7	THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS: (A) MESSAGE PACKAGE STRUCTURE: PACKED 4 SINGLE PULSE. (B) MESSAGE FORMAT: FIXED FORMAT. (C) ERROR CORRECTION CODING: CODED.
844	001	RTT INTERROGATION TYPE -----		SPECIFIES WHETHER AN RTT INTERROGA- TION MESSAGE IS AN ADDRESSED OR A BROADCAST MESSAGE.
		ADDRESSED MESSAGE	0	

FIELD CODING FOR RTT-B					(SHEET 4)
DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION	
844	001	RTT INTERROGATION TYPE -----	(CONTINUED)		
		BROADCAST MESSAGE	1		
279	001	TIME QUALITY -----		THE QUALITY IS STATED AS A NUMERICAL VALUE FROM 0 TO 15 WHERE THE HIGHER VALUES INDICATE THE HIGHER QUALITIES. QUALITY 0 IS NOT TO BE USED FOR SYNCHRONIZATION OR THE RELATIVE NAVIGATION FUNCTION.	
		> 18080 NANOSECONDS	0		
		< OR = 18080 NANOSECONDS	1		
		< OR = 9040 NANOSECONDS	2		
		< OR = 4520 NANOSECONDS	3		
		< OR = 2260 NANOSECONDS	4		
		< OR = 1600 NANOSECONDS	5		
		< OR = 1130 NANOSECONDS	6		
		< OR = 800 NANOSECONDS	7		
		< OR = 565 NANOSECONDS	8		
		< OR = 400 NANOSECONDS	9		
		< OR = 282 NANOSECONDS	10		
		< OR = 200 NANOSECONDS	11		
		< OR = 141 NANOSECONDS	12		
		< OR = 100 NANOSECONDS	13		
		< OR = 71 NANOSECONDS	14		
		NET TIME REFERENCE	15		
1677	001	SECURE DATA UNIT SERIAL NUMBER -----		DATA INSERTED BY SOURCE SECURE DATA UNIT OF THE ORIGINATOR AND CAN BE INTERPRETED ONLY BY THE SECURE DATA UNIT.	
		SEE DUI EXPLANATION	0 THROUGH 65535		

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

RTT-REP MESSAGE SUMMARY

PURPOSE

The RTT Reply message provides the means for a JTIDS/MIDS terminal to support the active synchronization procedure by providing time-of-arrival data in response to either an RTT-A or RTT-B Interrogation.

DATA ELEMENT SUMMARY

<u>RTT-REP</u>	
DATA ELEMENT	# BITS
TIME OF ARRIVAL	19
SECURE DATA UNIT SERIAL NUMBER	16

MIL-STD-6016B

RTT-REP TRANSMIT/RECEIVE RULES

TITLE: RTT Reply Message

TRANSMIT RULES

1. The RTT Reply shall be transmitted by a terminal upon the receipt of a RTT Interrogation - Addressed or a RTT Interrogation - Broadcast whose time quality is equal to its own time quality value.
2. The RTT Reply shall be transmitted during the same time slot as the received RTT Interrogation, 4,275 microseconds after the start of the time slot.
3. The RTT Reply shall not be transmitted by terminals that are operating in either the Polling or Conditional Radio Silence Mode.

RECEIVE RULES

Upon the receipt of a RTT Reply that was transmitted in response to its RTT Interrogation, a terminal shall perform a radio link time correction to update its clock and its time quality value.

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

WORD MAP

WORD NUMBER: RTT-REP
WORD TITLE: RTT Reply Message

24	23	22	21	20	19:	18	17	16	15	14	13	12	11	10	09	08	07	06	05	04	03	02	01	00:
<---					:	TIME OF ARRIVAL																		:
					:																			:
					:	19																		:

:	34	33	32	31	30	29	28	27	26	25
:	SECURE DATA UNIT SERIAL NUMBER									
:										
:	16									

WORD DESCRIPTION				

WORD NUMBER: RTT-REP				
WORD TITLE: RTT Reply Message				
REFERENCE			BIT #	
DFI/DUI	DATA FIELD DESCRIPTOR		POSITION BITS	RESOLUTION, CODING, ETC
387 019	TIME OF ARRIVAL		0- 18 19	
1677 001	SECURE DATA UNIT SERIAL NUMBER		19- 34 16	

FIELD CODING FOR RTT-REP (SHEET 1)

DFI	DUI	DUI/DI NAME	DI BIT CODE	DUI/DI EXPLANATION
387	019	TIME OF ARRIVAL -----		THE TIME INDICATED BY THE TERMINAL'S CLOCK AT THE TIME OF RECEPTION AT THE ANTENNA OF THE END OF THE FINAL 26-MICROSECOND TRANSMISSION SYMBOL OF THE RTT INTERROGATION MESSAGE.
		0 THROUGH 6.55 MILLISECONDS	0 THROUGH 524287	IN 12.5 NANOSECOND INCREMENTS. CODED WITH THE LEAST SIGNIFICANT BIT IN BIT POSITION 18.
1677	001	SECURE DATA UNIT SERIAL NUMBER -----		DATA INSERTED BY SOURCE SECURE DATA UNIT OF THE ORIGINATOR AND CAN BE INTERPRETED ONLY BY THE SECURE DATA UNIT.
		SEE DUI EXPLANATION	0 THROUGH 65535	

MIL-STD-6016B

SECTION 6

6. NOTES

This section contains information of a general or explanatory nature which may be helpful, but is not mandatory.

6.1 INTENDED USE

This standard will be used by all tactical data systems that have a requirement for Link 16 digital exchange on a real time basis.

6.2 SUPERSESSSION DATA

This standard supersedes MIL-STD-6016A, 30 April 1999.

6.3 SUBJECT TERM (KEY WORD) LISTING

6.3.1 GENERAL

Address	Navigation
Alert Indicators	Network
Antijam	Nonreal-Time
Association	Pairing
Coding	Participating Unit
Command and Control	Precision
Correlation	Real Time
Data Forwarding	Reference
Dual Designation	Reporting Responsibility
Electronic Warfare	Reporting Unit
Filtering	Round-Trip Timing
Forwarding Unit	Special Processing
Identity	Link 11
IFF/SIF	Link 11B
Interface Unit	Link 16
JTIDS/MIDS Unit	Track Correlation
Message	Track Number
Message Security	Track Quality
Message Sequence	Word

6.3.2 FUNCTIONAL AREAS

The Link 16 interface has been divided into functional area as follows:

- a. System Information Exchange and Network Management.
- b. Precise Participant Location and Identification (PPLI).
- c. Air Surveillance.
- d. Surface (Maritime) Surveillance.
- e. Subsurface (Maritime) Surveillance.
- f. Land (Ground) Surveillance.
- g. Electronic Surveillance.
- h. Electronic Warfare (EW)/Intelligence.
- i. Mission Management.
- j. Weapons Coordination and Management.
- k. Control.
- l. Information Management.

MIL-STD-6016B

6.4 INTERFACE CHANGE PROPOSALS (ICPs) INCLUDED IN THIS UPDATE

<u>ICP</u>	<u>Title</u>
TM93-091/Ch10	Track Number Block Allocation and Assignment
TJ93-104/Ch5	"Reset to no statement" rules
TM94-040/Ch7	Mode Clear Corrections
TJ95-016/Ch6	Interpretation of Filters
TM96-040/Ch6	Weapon Type Change
TM96-049/Ch1	"Sensor" Definitions
TM96-051/Ch6	Variable Track Quality
TM97-010/Ch7	TN Continuity
TM97-021/Ch2	IFF/SIF Validity and Current Criteria
TJ97-041/Ch1	Transmission of the J12.6E0 Word with Each Update
TM97-070/Ch2	DUI Definitions for DUIs 2652 and 2654
TM97-076/Ch1	Definition for Hostile
TM97-077/Ch7	J15.0 Changes
TJ97-078	J3.0 Update to Table 4.1-3
TM97-079/Ch7	Points Data Update Request Response
TM97-080/Ch2	Change Data Order Lockout Exercise Exclusion
TM97-081/Ch7	Clear Emergency/Force Tell Indicator with J2X Message
TJ97-084/Ch4	TMD Situational Data on TADIL A/B
TM97-091/Ch2	Mission Correlator Change Message
TJ97-095/Ch5	Retransmission of Surveillance Data
TM97-099/Ch5	Environment/Category
TM97-100/Ch4	General/Specific Type-No Statement
TJ97-111/Ch3	Handling of M.11B Message from TADIL J
TM97-113/Ch3	Prohibit Unknown Pending in CDO
TM97-115/Ch2	Weapons Status Fields in J13.3 Inadequate
TJ97-116/Ch3	M.9F from J14.0 Translation
TM97-128/Ch7	EW Control and Coordination Revision
TM97-142/Ch4	Deletion of EW Tracks and Tracks of Unknown Environment/Category
TJ97-143/Ch2	Target Position Quality (TPQ)to Track Quality (TQ) Mapping
TM97-153/Ch6	Datum Reporting
TM97-154/Ch5	Acoustic Bearing Origins
TM97-155/Ch4	Updating Specific Type Lists
TM97-187/Ch3	Reporting Rules for Friendly Interceptor Missiles
TJ97-188/Ch1	Priority Field Implementation
TM98-001/Ch5	J3.5 Square/Circle Switch and Lat/Long Additions
TM98-002/Ch4	Modifications to the J6.0/FJ6.0 Intelligence Information Message
TM98-003/Ch1	SAM Status Addition to Land (Ground) Platform Activity
TM98-006/Ch5	Time Report Function
TM98-015/Ch4	Engage with ASM/SSM Multilink Capability
TJ98-016/Ch2	Deletion of the J9.2 From MIL-STD-6016
TM98-017/Ch5	J13.4/FJ13.4 Subsurface (Maritime) Platform and System Status Message
TM98-019/Ch4	Command Value Correction
TJ98-020/Ch5	Aircraft State Table Deletion
TM98-022/Ch3	Redundant Command Capabilities
TJ98-023	Optional Implementation of Inter-Fighter SIDS
TJ98-026/Ch2	Deletion of J16 V/R-Series Control
TJ98-028/Ch2	J28.2(8) Message
TM98-029/Ch2	Ballistic Missile Defense Coordination via TADIL J
TM98-035/Ch11	Correlation/Decorrelation

MIL-STD-6016B

TM98-050/Ch3	Deletion of Command Authority for M.15/J9.0
TM98-053/Ch3	Additional J13.2 Subsystem Statuses
TM98-059/Ch3	Data Forwarding Receipt/Compliance Correction
TM98-061/Ch1	Clarify IFF Resolution Procedures
TJ98-062/Ch1	Corrects Error in MIL-STD 6016 Table 4.5-1
TJ98-063/Ch2	Remove Single Threat Application of MADs 37 & 38 in the J12.0 Message
TJ98-064/Ch1	Mandatory Transmission of ENV/CAT (E/C) in the J12.6 Message
TM98-065	Orbit, Random Closed Definition
TJ98-068/Ch2	J12.6 Target Accuracies
TM98-113/Ch1	Modification to the J2.2 Bailout Indicator Definition
TM98-114/Ch3	Delete J9.0 Fragmentary Order Number Field
TJ98-115/Ch1	Redundant Action Value Fields in MIN IMP Tables
TM98-125/Ch7	Deletion of Mission Correlators
TM98-126/Ch1	Incorrect Data Element Translation of J10.3 Message
TM98-129/Ch1	EW Terminology Update
TJ98-130/Ch1	Net Number Value Change
TJ98-131/Ch5	Clarification of PPLI Reporting
TJ98-132	J7.0 Transmission Clarification
TM98-133/Ch2	Incorrect Definition of Voice Frequency/Channel
TM98-137/Ch3	J3.0 Line Segment Time Reporting
TJ98-140/Ch1	Deletion of Source Indicator
TJ98-142/Ch1	J12.6E0 Minimum Implementation for SID=5
TM98-143/Ch1	J13.3/FJ13.3 and J13.5/FJ13.5 Transmission Rate
TM98-148/Ch2	Chaining DFIs Rules
TJ98-156/Ch2	J12.6 "Sensor On" As Default
TM98-157/Ch1	"High Energy Lasing" Addition to Air Platform Activity
TM98-158/Ch1	Add Airborne Laser to DFI/DUI 1797/001
TJ98-159/Ch5	J12.6 SID by Environment/Category
TJ98-191/Ch1	Deletion of Exercise Filter Indicator
TJ98-195	Correction to J3.4 Transmit Rule in TM94-030
TJ99-010/Ch5	Drop Track Transmission of Purged J3.0, J3.1, AND J3.5
TM99-013/Ch5	Altitude, Corridor, and LLTR Reporting in J/F3.0
TM99-016/Ch4	Altitude in the J3.0/FJ3.0 Reference Point and J7.6/FJ7.6
	Filter Management Messages
TM99-018/Ch5	Deletion of PLAD from J7.6/FJ7.6
TM99-019/Ch2	Multiple Engagements in J10.2/FJ10.2
TM99-021/Ch5	ASW Sensor Definition
TM99-027/Ch5	SAM/SSM Addition to J3.3 and J6.0 Messages
TM99-030/Ch3	New Data Elements for J9.0 and J12.0
TJ99-031/Ch2	Track Filter for NONC2 JUs
TM99-033/Ch3	Update Type of Stores
TJ99-038/Ch2	RC Table 4.1-8 Split
TM99-045/Ch2	Cancellation of EWACs 28 and 29
TM99-047/Ch1	Assuming R2 on Lost Tracks
TM99-048/Ch3	Clarification of Ballistic Missile DUR Response Rule
TM99-049/Ch1	Clarification of Variable Delta t
TJ99-050/Ch5	J9.1/1FJ9.1 Engagement Coordination Message Transmit/Receive Rules
TJ99-068/Ch1	M.6B to Link 16 Translation Tree
TM99-069/Ch3	DFI 266/422 Definition
TM99-070	Addition of Subsurface (Maritime)
TJ99-073/Ch1	Handover Correction
TM99-075/Ch2	Mission Commander Indicator
TJ99-076	M.11M/M.81 Transmission
TJ99-077/Ch1	J3.5 Continuation Word Clarification
TJ99-079/Ch1	M.11M Translation from the J6.0 Message

MIL-STD-6016B

TJ99-080/Ch1	Translation of Mine Warfare Point from Link 11 to Link 16
TJ99-098/Ch2	Remove Redundant Transmission Variable Parameter
TJ99-099/Ch1	M.14 Translation from the J13.2/FJ13.2 Message
TJ99-100	Incorporation Error in Table 4.7-1 Environment/Category Difference Resolution
TM99-126/Ch5	Deletion of FA/CS
TM99-135/Ch3	Forwarding of Positional Data in M.1/M.81/M.5
TM99-137/Ch1	Update of GE Air, Surface (Maritime)
TJ00-003/Ch2	MS6016A Editorial Corrections
TM00-009	Removal of the Mode 4 Correlation Restriction
TJ00-012/Ch1	Addition of MAD 45 to Paragraph 4.12.1.3.1G(3)
TJ00-013/Ch1	TADIL J Land Specific Type (10) Translation Correction
TM00-018/Ch3	"Local" Data Terminology
TM00-019/Ch1	Change TADIL Names to NATO Equivalents
TJ00-020/Ch1	Use of J12.1 Collective Address
TJ00-025	J28.2(9) Message Update
TM00-036/Ch3	Alignment of Link 16 and Link 22 Data Element Dictionaries (DEDs)
TM00-039/Ch3	Change J6.0 Message Title to "Amplification Message"
TM00-040/Ch4	Emergency Alert on J3.0 Reference Points
TJ00-041/Ch3	Forwarding J3.5 Track Identities to TADIL A/B
TJ00-042/Ch2	Frequency Conversion
TJ00-043	J3.0/FJ3.0 to Link 11/11B Message Translation Clarification
TJ00-044	J3.5/F03.5 Translation of Land Platform
TM00-046/Ch2	Forwarding Speed on Non-Real Time Track (NRT)
TJ00-061	Corrections to J2.X/F02.X Translations
TJ00-062/Ch1	M.9B Translation from the J/FJ3.1 Messages
TM00-065	Deletion J3.4/F4 DRT Unknown
TM00-074	J7.0/FJ7.0 (ACT=6) Exercise Status Order Clarification
TM00-075	J7.7/FJ7.7 Message Independence
TM00-079/Ch2	DFI/DUI 1860 001 Clarification
TJ00-085	Reservation of Message Label for National Message
TJ00-086/Ch2	Addition of ATC Call Sign to J3.2 Message
TM00-092/Ch1	Interpretation of Filters
TM00-093/Ch2	Additional Sonobuoy Types
TM00-095/Ch2	Terminology Conventions
TJ00-099	J3.0 Transmit Rule Correction
TJ01-007/Ch2	Method of Fire Data Element in J9.0 and J12.0 Messages
TM01-052	Correction to TM99-137 (Update of Specific Types)
TM01-063/Ch2	Reservation of J29.3 Through J29.4 Message Label as Spanish National Message
TJ01-135/Ch1	J3.0 Point Type/Point AMP Explanation
TM01-139	Reservation of J29.5 Message Label as Canadian National Message
TM02-010	Assign Specific Type Designator to ASTOR
TJ02-016/Ch1	MIL-STD-6016B Editorials

MIL-STD-6016B

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

CONCLUDING MATERIAL

Custodians:

Army - SC

Navy - OM

Air force - 02

Preparing Activity:

MISC - DC

Review Activities:

Army - CR, MI

Navy - MC

Air force - 93

MISC - NS

User Activities:

NOT APPLICABLE

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

INTERFACE CHANGE PROPOSALS

1. Interface Change Proposals (ICPs). Changes to this standard are prepared according to the specific procedures established by the Multi-TDL Configuration Control Board (CCB) using the attached ICP form. Instructions for filling out the form are found on the facing page. Submission will be made directly to the appropriate service or agency CCB member organization for ultimate submission to DISA/IN5.

2. Questions and comments may be submitted to:

Director,
DISA Interoperability (IN)
Military C2 Standards Division (IN5)
5600 Columbia Pike
Falls Church, VA 22041-2717

UNCLASSIFIED

INTERFACE CHANGE PROPOSAL (ICP)

ICP NUMBER:

CHANGE PROPOSAL TITLE:

ORIGINATOR and ADDRESS:

ORIGINATOR'S INTERNAL NUMBER:

AFFECTED DOCUMENT:

PRECEDENCE:

RECOMMENDATIONS:

ALLIED COORDINATION:

RECORD OF PROCESSING
DATE: ACTION:

UNCLASSIFIED

MIL-STD-6016B

ICP NUMBER: A unique number identifier, entered by DISA/IN5.

CHANGE PROPOSAL TITLE: The originator fills in a short title for the ICP which is descriptive of the content.

ORIGINATOR & ADDRESS: Originator's activity title, address

ORIGINATOR'S INTERNAL NUMBER: Originator's internal number.

AFFECTED DOCUMENT(S): The originator identifies the affected document(s).

PRECEDENCE: The originator indicates routine, priority, or urgent for desired processing.

RECOMMENDATIONS: The originator indicates special processing requirements for the ICP, such as:

- a. Requirement for priority or urgent processing.
- b. The inclusion of the ICP on a TRP agenda.
- c. The request for a CCB phone vote.
- d. The recommendation for certification testing.
- e. Any time requirements for the approval of the ICP.
- f. Whether DERG changes are required.
- g. Whether JMTOP changes are required.

ALLIED COORDINATION: The originator indicates if allied coordination is applicable.

RECORD OF PROCESSING: DISA/IN5 indicates the change and/or action directed by the CCB. The date of CCB action will be the last day of the appropriate CCB, and annotated Day-Month-Year. All actions recorded in the record of processing shall pertain to the ICP unless otherwise specifically stated.

UNCLASSIFIED

1. STATEMENT OF THE PROBLEM:
2. PROBLEM ANALYSIS:
3. PROPOSED SOLUTION:
4. ALTERNATE SOLUTION:
5. SYSTEM CHANGES REQUIRED:
6. CONFIGURATION ITEM DOCUMENTATION CHANGES:
7. IMPACT ON INTEROPERABILITY:
8. IMPACT ON RELATED DOCUMENTS:
9. IMPLEMENTATION DATE:
10. OTHER CONSIDERATIONS
11. REFERENCES:
12. TRs ADDRESSED IN THIS ICP:

UNCLASSIFIED

MIL-STD-6016B

1. STATEMENT OF THE PROBLEM: Brief statement of the problem by the originator.
2. PROBLEM ANALYSIS: Analysis of the problems and questions involved.
3. PROPOSED SOLUTION: Brief statement of the essentials of the solution.
4. ALTERNATIVE SOLUTIONS: Brief statement of any alternative solutions. If there are no alternative solutions, indicate "None." The submitted ICP may state "To be determined."
5. SYSTEM CHANGES REQUIRED: Identifies any system impacts associated with the change proposal which may require system changes. If there is no impact, state "None." If processing has yet to determine the impact, state "To be determined."
6. CONFIGURATION ITEM DOCUMENTATION CHANGES: If there are no changes, indicate "None." The section, as submitted, may read "To be determine. Identify documents changed by the ICP.
7. IMPACT ON INTEROPERABILITY: Describes as to whether the proposed change is considered to improve or adversely affect interoperability of data systems.
8. IMPACT ON RELATED DOCUMENTS: Identifies other documents that are/may be affected by this change proposal.
9. IMPLEMENTATION DATES: Identifies the intended implementation dates for this proposed change. If processing has not progressed to the point of knowing the implementation dates, state "To be determined."
10. OTHER CONSIDERATIONS: Provides any information deemed advisable that is not covered elsewhere in the ICP. This paragraph should include determination of whether coordinated implementation is required.
11. REFERENCES: List any references.

12. TRs ADDRESSED IN THIS ICP: Reference all TRs resolved by this ICP, as appropriate.

INCH-POUND

MIL-STD-6016B

1 August 2002

Superseding

MIL-STD-6016A

30 April 1999

DEPARTMENT OF DEFENSE INTERFACE STANDARD

TACTICAL DATA LINK (TDL) 16 MESSAGE STANDARD

APPENDIX A - MINIMUM IMPLEMENTATION



AMSC N/A

AREA: INST

DISTRIBUTION STATEMENT D: Distribution authorized to DOD and U.S. DOD contractors for administrative or operational use. Other requests for this document shall be forwarded to Defense Information Systems Agency (DISA/IN5). See distribution warning on page A-iii.

THIS PAGE IS INTENTIONALLY LEFT BLANK

MIL-STD-6016B
APPENDIX A
DISTRIBUTION WARNING

WARNING - This document contains technical data whose export is restricted by the Arms Export Control Act (Title 22, U.S.C., Sec. 2751 et seq.) or Executive Order 12470. Violations of these export laws are subject to severe criminal penalties. Disseminate in accordance with provisions of DOD Directive 5230.25.

THIS PAGE IS INTENTIONALLY LEFT BLANK

MIL-STD-6016B

APPENDIX A

MINIMUM IMPLEMENTATION TABLE OF CONTENTS

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
A.1	Scope.....	A-1
A.1.1	General.....	A-1
A.1.2	Applicability.....	A-1
A.2	Applicable Documents.....	A-2
A.3	Definitions.....	A-2
A.4	General Requirements.....	A-2
A.4.1	Functional Minimum Implementation.....	A-3
A.4.2	Related Function Minimum Implementation.....	A-5
A.4.3	Message Minimum Implementation	A-5
A.4.4	Word Minimum Implementation.....	A-6
A.4.5	Data Element Minimum Implementation.....	A-6
A.4.6	Data Item Minimum Implementation.....	A-7
A.4.7	Waiver.....	A-7
A.4.7.1	Initial Operational Capability (IOC).....	A-8
A.4.7.2	Special and Contributing Systems.....	A-8
A.5	Detailed Requirements.....	A-9
A.5.1	Symbol Definition.....	A-9
A.5.2	Notations.....	A-10
A.5.3	Link 16 Functional Minimum Implementation.....	A-17
A.5.4	Link 16 Related Function Minimum Implementation.....	A-17
A.5.5	Link 16 Message Minimum Implementation.....	A-21
A.5.5.1	Terminal Baseline Message Minimum Implementation.....	A-21
A.5.5.2	Net Control Station Minimum Implementation.....	A-21
A.5.5.3	Network Manager Minimum Implementation.....	A-21
A.5.5.4	Distributed Routing Minimum Implementation.....	A-22
A.5.5.5	Common Message Minimum Implementation for Tactical Data Systems.....	A-22
A.5.5.6	Time Slot Reallocation Message Minimum Implementation.....	A-22
A.5.5.7	C ² JU Message Minimum Implementation by Function.....	A-22
A.5.5.8	NonC ² JU Message Minimum Implementation by Function.....	A-22
A.5.6	Link 16 Word, Data Element, and Data Item Minimum Implementation.....	A-23
A.5.6.1	Link 16 Word Minimum Implementation.....	A-41
A.5.6.2	Link 16 Data Element Minimum Implementation.....	A-42
A.5.6.3	Link 16 Data Item Minimum Implementation.....	A-42
A.5.7	Message and Purpose.....	A-43
J0.0	Word, Data Element, and Data Item Minimum Implementation.....	A-57
J0.1	Word, Data Element, and Data Item Minimum Implementation.....	A-59
J0.2	Word, Data Element, and Data Item Minimum Implementation.....	A-60
J0.3	Word, Data Element, and Data Item Minimum Implementation.....	A-61
J0.4	Word, Data Element, and Data Item Minimum Implementation.....	A-63
J0.5	Word, Data Element, and Data Item Minimum Implementation.....	A-65
J0.6	Word, Data Element, and Data Item Minimum Implementation.....	A-67
J0.7	Word, Data Element, and Data Item Minimum Implementation.....	A-69
J1.0	Word, Data Element, and Data Item Minimum Implementation.....	A-71
J1.1	Word, Data Element, and Data Item Minimum Implementation.....	A-73
J1.2	Word, Data Element, and Data Item Minimum Implementation.....	A-77
J1.3	Word, Data Element, and Data Item Minimum Implementation.....	A-79
J1.4	Word, Data Element, and Data Item Minimum Implementation.....	A-83
J1.5	Word, Data Element, and Data Item Minimum Implementation.....	A-91
J1.6	Word, Data Element, and Data Item Minimum Implementation.....	A-93
J2.0	Word, Data Element, and Data Item Minimum Implementation.....	A-95
J2.2	Word, Data Element, and Data Item Minimum Implementation.....	A-97
J2.3	Word, Data Element, and Data Item Minimum Implementation.....	A-99
J2.4	Word, Data Element, and Data Item Minimum Implementation.....	A-101
J2.5	Word, Data Element, and Data Item Minimum Implementation.....	A-103
J2.6	Word, Data Element, and Data Item Minimum Implementation.....	A-105

MIL-STD-6016B

APPENDIX A

TABLE OF CONTENTS (continued)

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
J3.0	Word, Data Element, and Data Item Minimum Implementation.....	A-107
J3.1	Word, Data Element, and Data Item Minimum Implementation.....	A-111
J3.2	Word, Data Element, and Data Item Minimum Implementation.....	A-112
J3.3	Word, Data Element, and Data Item Minimum Implementation.....	A-115
J3.4	Word, Data Element, and Data Item Minimum Implementation.....	A-117
J3.5	Word, Data Element, and Data Item Minimum Implementation.....	A-119
J3.6	Word, Data Element, and Data Item Minimum Implementation.....	A-123
J3.7	Word, Data Element, and Data Item Minimum Implementation.....	A-127
J5.4	Word, Data Element, and Data Item Minimum Implementation.....	A-133
J6.0	Word, Data Element, and Data Item Minimum Implementation.....	A-135
J7.0	Word, Data Element, and Data Item Minimum Implementation.....	A-137
J7.1	Word, Data Element, and Data Item Minimum Implementation.....	A-141
J7.2	Word, Data Element, and Data Item Minimum Implementation.....	A-143
J7.3	Word, Data Element, and Data Item Minimum Implementation.....	A-144
J7.4	Word, Data Element, and Data Item Minimum Implementation.....	A-147
J7.5	Word, Data Element, and Data Item Minimum Implementation.....	A-149
J7.6	Word, Data Element, and Data Item Minimum Implementation.....	A-151
J7.7	Word, Data Element, and Data Item Minimum Implementation.....	A-155
J8.0	Word, Data Element, and Data Item Minimum Implementation.....	A-157
J8.1	Word, Data Element, and Data Item Minimum Implementation.....	A-158
J9.0	Word, Data Element, and Data Item Minimum Implementation.....	A-159
J9.1	Word, Data Element, and Data Item Minimum Implementation.....	A-165
J10.2	Word, Data Element, and Data Item Minimum Implementation.....	A-169
J10.3	Word, Data Element, and Data Item Minimum Implementation.....	A-175
J10.5	Word, Data Element, and Data Item Minimum Implementation.....	A-176
J10.6	Word, Data Element, and Data Item Minimum Implementation.....	A-177
J12.0	Word, Data Element, and Data Item Minimum Implementation.....	A-179
J12.1	Word, Data Element, and Data Item Minimum Implementation.....	A-221
J12.2	Word, Data Element, and Data Item Minimum Implementation.....	A-231
J12.3	Word, Data Element, and Data Item Minimum Implementation.....	A-235
J12.4	Word, Data Element, and Data Item Minimum Implementation.....	A-241
J12.5	Word, Data Element, and Data Item Minimum Implementation.....	A-245
J12.6	Word, Data Element, and Data Item Minimum Implementation.....	A-246
J12.7	Word, Data Element, and Data Item Minimum Implementation.....	A-299
J13.0	Word, Data Element, and Data Item Minimum Implementation.....	A-301
J13.2	Word, Data Element, and Data Item Minimum Implementation.....	A-305
J13.3	Word, Data Element, and Data Item Minimum Implementation.....	A-309
J13.4	Word, Data Element, and Data Item Minimum Implementation.....	A-313
J13.5	Word, Data Element, and Data Item Minimum Implementation.....	A-315
J14.0	Word, Data Element, and Data Item Minimum Implementation.....	A-317
J14.2	Word, Data Element, and Data Item Minimum Implementation.....	A-327
J15.0	Word, Data Element, and Data Item Minimum Implementation.....	A-353
J17.0	Word, Data Element, and Data Item Minimum Implementation.....	A-355
J28.20	Word, Data Element, and Data Item Minimum Implementation.....	A-357
J31.0	Word, Data Element, and Data Item Minimum Implementation.....	A-359
J31.1	Word, Data Element, and Data Item Minimum Implementation.....	A-367
J31.7	Word, Data Element, and Data Item Minimum Implementation.....	A-368
RTT-A	Word, Data Element, and Data Item Minimum Implementation.....	A-369
RTT-B	Word, Data Element, and Data Item Minimum Implementation.....	A-370
RTT-REPLY	Word, Data Element, and Data Item Minimum Implementation.....	A-371

MIL-STD-6016B

APPENDIX A

LIST OF TABLES

Table		Page
Table A.5-1	Symbol Definitions	A-9
Table A.5-2	Explanation of Numerical Notations	A-10
Table A.5-3	Related Function Minimum Implementation for C ² JUs	A-19
Table A.5-4	Related Function Minimum Implementation for NonC ² JUs	A-20
Table A.5-5	Terminal Baseline Message Implementation	A-25
Table A.5-6	Net Control Station Message Minimum Implementation	A-25
Table A.5-7	Network Manager Message Minimum Implementation	A-26
Table A.5-8	Distributed Routing Message Minimum Implementation	A-26
Table A.5-9	Common Message Minimum Implementation for Tactical Data Systems	A-26
Table A.5-10	Time Slot Reallocation Message Minimum Implementation	A-27
Table A.5-11	Message Minimum Implementation by Function for C ² JUs	A-29
Table A.5-12	Message Minimum Implementation by Function for NonC ² JUs	A-35
Table A.5-15	Link 16 Message and Purpose Listing	A-44
Table A.5-J0.0	Word, Data Element, and Data Item Minimum Implementation	A-57
Table A.5-J0.1	Word, Data Element, and Data Item Minimum Implementation	A-59
Table A.5-J0.2	Word, Data Element, and Data Item Minimum Implementation	A-60
Table A.5-J0.3	Word, Data Element, and Data Item Minimum Implementation	A-61
Table A.5-J0.4	Word, Data Element, and Data Item Minimum Implementation	A-63
Table A.5-J0.5	Word, Data Element, and Data Item Minimum Implementation	A-65
Table A.5-J0.6	Word, Data Element, and Data Item Minimum Implementation	A-67
Table A.5-J0.7	Word, Data Element, and Data Item Minimum Implementation	A-69
Table A.5-J1.0	Word, Data Element, and Data Item Minimum Implementation	A-71
Table A.5-J1.1	Word, Data Element, and Data Item Minimum Implementation	A-73
Table A.5-J1.2	Word, Data Element, and Data Item Minimum Implementation	A-77
Table A.5-J1.3	Word, Data Element, and Data Item Minimum Implementation	A-79
Table A.5-J1.4	Word, Data Element, and Data Item Minimum Implementation	A-83
Table A.5-J1.5	Word, Data Element, and Data Item Minimum Implementation	A-91
Table A.5-J1.6	Word, Data Element, and Data Item Minimum Implementation	A-93

MIL-STD-6016B

APPENDIX A

LIST OF TABLES (continued)

<u>Table</u>		<u>Page</u>
Table A.5-J2.0	Word, Data Element, and Data Item Minimum Implementation.....	A-95
Table A.5-J2.2	Word, Data Element, and Data Item Minimum Implementation.....	A-97
Table A.5-J2.3	Word, Data Element, and Data Item Minimum Implementation.....	A-99
Table A.5-J2.4	Word, Data Element, and Data Item Minimum Implementation.....	A-101
Table A.5-J2.5	Word, Data Element, and Data Item Minimum Implementation.....	A-103
Table A.5-J2.6	Word, Data Element, and Data Item Minimum Implementation.....	A-105
Table A.5-J3.0	Word, Data Element, and Data Item Minimum Implementation.....	A-107
Table A.5-J3.1	Word, Data Element, and Data Item Minimum Implementation.....	A-111
Table A.5-J3.2	Word, Data Element, and Data Item Minimum Implementation.....	A-112
Table A.5-J3.3	Word, Data Element, and Data Item Minimum Implementation.....	A-115
Table A.5-J3.4	Word, Data Element, and Data Item Minimum Implementation.....	A-117
Table A.5-J3.5-1	Point/Track Indicator Value Minimum Implementation for the J3.5 Message.....	A-120
Table A.5-J3.5-2	Word Level Minimum Implementation by Point/Track Indicator Value	A-120
Table A.5-J3.5-3	Data Level Minimum Implementation by Point/Track Indicator Value.....	A-121
Table A.5-J3.6	Word, Data Element, and Data Item Minimum Implementation.....	A-123
Table A.5-J3.7-1	Fix or Bearing Descriptor Value Minimum Implementation for the J3.7 Message.....	A-128
Table A.5-J3.7-2	Word Element Level Minimum Implementation by Fix or Bearing Descriptor Value.....	A-128
Table A.5-J3.7-3	Data Element Level Minimum Implementation by Fix or Bearing Descriptor Value.....	A-129
Table A.5-J5.4	Word, Data Element, and Data Item Minimum Implementation.....	A-133
Table A.5-J6.0	Word, Data Element, and Data Item Minimum Implementation.....	A-135
Table A.5-J7.0-1	Action, Track Management Value Minimum Implementation for the J7.0 Message.....	A-138
Table A.5-J7.0-2	Word Level Minimum Implementation Action, Track Management Value.....	A-138
Table A.5-J7.0-3	Data Element Level Minimum Implementation by Action, Track Management Value	A-139
Table A.5-J7.1-1	Action, Data Update Request Value Minimum Implementation for the J7.1 Message.....	A-142
Table A.5-J7.1-2	Word Level Minimum Implementation Action, Data Update Request Value.....	A-142
Table A.5-J7.1-3	Data Element Level Minimum Implementation by Action, Data Update Request Value.....	A-142
Table A.5-J7.2	Word, Data Element, and Data Item Minimum Implementation.....	A-143
Table A.5-J7.3	Word, Data Element, and Data Item Minimum Implementation.....	A-144
Table A.5-J7.4	Word, Data Element, and Data Item Minimum	

MIL-STD-6016B

APPENDIX A

ImplementationA-147

MIL-STD-6016B

APPENDIX A

LIST OF TABLES

<u>Table</u>		<u>Page</u>
Table A.5-J7.5-1	Action, IFF/SIF Management Value Minimum Implementation for the J7.5 Message.....	A-150
Table A.5-J7.5-2	Word Level Minimum Implementation by Action, IFF/SIF Management Value.....	A-150
Table A.5-J7.5-3	Data Element Level Minimum Implementation by Action, IFF/SIF Management Value.....	A-150
Table A.5-J7.6-1	Action, Filter Management Minimum Implementation for the J7.6 Message.....	A-152
Table A.5-J7.6-2	Word Element Level Minimum Implementation by Action, Filter Management Value.....	A-152
Table A.5-J7.6-3	Data Element Level Minimum Implementation by Action, Filter Management Value.....	A-153
Table A.5-J7.7	Word, Data Element, and Data Item Minimum Implementation.....	A-155
Table A.5-J8.0	Word, Data Element, and Data Item Minimum Implementation.....	A-157
Table A.5-J8.1	Word, Data Element, and Data Item Minimum Implementation.....	A-158
Table A.5-J9.0-1	Command Value Minimum Implementation by Mission Category.....	A-160
Table A.5-J9.0-2	Word Level Minimum Implementation by Command Value ...	A-161
Table A.5-J9.0-3	Data Element Level Minimum Implementation by Command Value.....	A-162
Table A.5-J9.1-1	Engagement Coordination Action Value Minimum Implementation for the J9.1 Message.....	A-166
Table A.5-J9.1-2	Word Level Minimum Implementation by Engagement Coordination Action Value.....	A-166
Table A.5-J9.1-3	Data Element Level Minimum Implementation by Engagement Coordination Action Value.....	A-166
Table A.5-J10.2-1	Weapon Engagement Status Value Minimum Implementation by Mission Category.....	A-170
Table A.5-J10.2-2	Word Level Minimum Implementation by Weapon Status Value.....	A-172
Table A.5-J10.2-3	Data Element Level Minimum Implementation by Weapon Engagement Status Value.....	A-173
Table A.5-J10.3	Word, Data Element, and Data Item Minimum Implementation.....	A-175
Table A.5-J10.5	Word, Data Element, and Data Item Minimum Implementation.....	A-176
Table A.5-J10.6-1	Pairing Action Value Minimum Implementation by Mission Category.....	A-178
Table A.5-J10.6-2	Word Level Minimum Implementation by Pairing Action Value.....	A-178
Table A.5-J10.6-3	Data Element Level Minimum Implementation for All Defined Pairing Action Values.....	A-178
Table A.5-J12.0-1	Mission Assignment Discrete Value Minimum Implementation by Mission Category.....	A-180
Table A.5-J12.0-2	Word Level Minimum Implementation by Mission Assignment Discrete Value.....	A-184
Table A.5-J12.0-3	Data Element Level Minimum Implementation by Mission Assignment Discrete Value.....	A-190

MIL-STD-6016B

APPENDIX A

LIST OF TABLES

<u>Table</u>		<u>Page</u>
Table A.5-J12.1-1	Vector Discrete Value Minimum Implementation by Mission Category.....	A-222
Table A.5-J12.1-2	Word Level Minimum Implementation by Vector Discrete Value.....	A-224
Table A.5-J12.1-3	Data Element Level Minimum Implementation by Vector Discrete Value.....	A-225
Table A.5-J12.2-1	Precision Aircraft Direction Discrete Value Minimum Implementation by Mission Category.....	A-232
Table A.5-J12.2-2	Word Level Minimum Implementation by Precision Aircraft Direction Discrete Value.....	A-233
Table A.5-J12.2-3	Data Element Level Minimum Implementation by Precision Aircraft Direction Discrete Value.....	A-234
Table A.5-J12.3-1	Waypoint Action/Descriptor Value Minimum Implementation by Mission Category.....	A-236
Table A.5-J12.3-2	Word Level Minimum Implementation by Waypoint Action/Descriptor Value.....	A-237
Table A.5-J12.3-3	Data Element Level Minimum Implementation by Waypoint Action/Descriptor Value.....	A-238
Table A.5-J12.4-1	Control Change Indicator Value Minimum Implementation by Mission Category.....	A-242
Table A.5-J12.4-2	Word Level Minimum Implementation by Control Change Indicator Value.....	A-243
Table A.5-J12.4-3	Data Element Level Minimum Implementation by Control Change Indicator Value.....	A-243
Table A.5-J12.5	Word, Data Element, and Data Item Minimum Implementation.....	A-245
Table A.5-J12.6-1	Status Information Discrete Value Minimum Implementation by Environment/Category.....	A-247
Table A.5-J12.6-2	Word Level Minimum Implementation by Status Information Discrete Value by Enviroment/Category..	A-249
Table A.5-J12.6-3	Data Element Level Minimum Implementation by Status Information Discrete Value.....	A-259
Table A.5-J12.7	Word, Data Element, and Data Item Minimum Implementation.....	A-299
Table A.5-J13.0	Word, Data Element, and Data Item Minimum Implementation.....	A-301
Table A.5-J13.2	Word, Data Element, and Data Item Minimum Implementation.....	A-305
Table A.5-J13.3	Word, Data Element, and Data Item Minimum Implementation.....	A-309
Table A.5-J13.4	Word, Data Element, and Data Item Minimum Implementation.....	A-313
Table A.5-J13.5	Word, Data Element, and Data Item Minimum Implementation.....	A-315
Table A.5-J14.0-1	Fix or Bearing Descriptor Value Minimum Implementation for the J14.0 Message.....	A-318
Table A.5-J14.0-2	Word Level Minimum Implementation by Fix or Bearing Descriptor Value.....	A-319
Table A.5-J14.0-3	Data Element Level Minimum Implementation by Fix or Bearing Descriptor Value.....	A-320
Table A.5-J14.2-1	EW Action Value Minimum Implementation for the J14.2 Message.....	A-328
Table A.5-J14.2-2	Word Level Minimum Implementation by Electronic Warfare Action Value.....	A-329
Table A.5-J14.2-3	Data Element Level Minimum Implementation by Electronic Warfare Action Value.....	A-332
Table A.5-J15.0	Word, Data Element, and Data Item Minimum	

MIL-STD-6016B

APPENDIX A

ImplementationA-353

MIL-STD-6016B

APPENDIX A

LIST OF TABLES

<u>Table</u>		<u>Page</u>
Table A.5-J17.0	Word, Data Element, and Data Item Minimum Implementation	A-355
Table A.5-J28.20	Word, Data Element, and Data Item Minimum Implementation	A-357
Table A.5-J31.0-1	Action Code, Over the Air Rekeying Value Minimum Implementation for the J31.0 Message	A-360
Table A.5-J31.0-2	Word Level Minimum Implementation by Action Code, Over-the-Air Rekeying Value	A-361
Table A.5-J31.0-3	Data Element Level Minimum Implementation by Action Code, Over-the-Air Rekeying Value	A-362
Table A.5-J31.1	Word, Data Element, and Data Item Minimum Implementation	A-367
Table A.5-J31.7	Word, Data Element, and Data Item Minimum Implementation	A-368
Table A.5-RTT-A	Word, Data Element, and Data Item Minimum Implementation	A-369
Table A.5-RTT-B	Word, Data Element, and Data Item Minimum Implementation	A-370
Table A.5-RTT-REPLY	Word, Data Element, and Data Item Minimum Implementation	A-371

LIST OF FIGURES

<u>Figure</u>		<u>Page</u>
Figure A.4-1.	Levels of Minimum Implementation	A-4

THIS PAGE IS INTENTIONALLY LEFT BLANK

MIL-STD-6016B

APPENDIX A

MINIMUM IMPLEMENTATION

A.1 SCOPE

A.1.1 GENERAL

Appendix A identifies the minimum data exchange requirements which must be implemented by Service/Agency systems participating on the Link 16 Interface. The fulfillment of these joint data exchange requirements is mandatory to establish and maintain the Link 16 Interface, to participate within a specific functional area, and to prevent adverse effects on the interface. Although a system may implement more than the joint requirements stated here (i.e., system implementation requirements); this appendix describes only the mandatory minimum required for joint purposes. The minimum implementation (MIN IMP) requirements contained in this appendix therefore, do not imply that all operational requirements or desired interoperability levels have been met. The joint MIN IMP requirements in this appendix are used to form the system implementation requirements that are identified in MIL-STD-6016 Appendix D, System Implementation.

This appendix specifies the MIN IMP requirements for only the fixed word format messages contained in Section 5 of the MIL-STD-6016. As other functions and fixed word format messages are developed, the MIN IMP requirements for them will be added. For design purposes, this appendix is to be used in conjunction with the rules, protocols, and procedures contained in other parts of the MIL-STD-6016.

This appendix does not contain the implementation requirements for data forwarding. Specific systems participating in the Link 16 Interface will be required to forward information between Link 16 and Links 11 and 11B. The data forwarding implementation requirements are described in Appendix C of MIL-STD-6016.

A.1.2 APPLICABILITY

The MIN IMP requirements in this appendix apply to all Service/Agency systems participating on the Link 16 Interface. The applicability of these

APPENDIX A

requirements is directed towards digital data exchange in a joint environment where systems of two or more Services/Agencies are involved.

The implementation of these minimum requirements for data exchange is contingent upon the conventions, constraints, protocols and rules specified in MIL-STD-6016 Sections 4 and 5 which must be followed to participate on the Link 16 Interface.

A.2 APPLICABLE DOCUMENTS

The documents listed in section 2 of this standard are applicable to this appendix.

A.3 DEFINITIONS

The definitions in section 3 of this standard apply to this appendix.

A.4 GENERAL REQUIREMENTS

MIN IMP is defined in terms of the requirements that must be met at six different levels as follows:

- a. Functional.
- b. Related function.
- c. Message.
- d. Word.
- e. Data element.
- f. Data item.

The hierarchical relationship between these levels is shown in Figure A.4-1. To meet MIN IMP requirements, a system must implement all items within each level that are specified as mandatory before being able to satisfy the MIN

APPENDIX A

IMP requirements of the next lower level. It should be noted that both functional and related function MIN IMP requirements must be satisfied before message MIN IMP requirements can be satisfied. Similarly, message MIN IMP requirements must be satisfied before word MIN IMP requirements can be met.

A system can elect to implement a function that is not mandatory for MIN IMP. When a system elects to implement a nonmandatory function, the MIN IMP requirements at all lower levels for that function must be met. A system cannot elect to implement a nonmandatory item at an intermediate level (e.g., message or word) unless it has first implemented the MIN IMP requirements of all higher levels of that function beginning at the functional level.

The mandatory MIN IMP requirements in this appendix are also defined in terms of transmission and reception.

A.4.1 FUNCTIONAL MINIMUM IMPLEMENTATION

The JTIDS/MIDS Technical Interface Concepts (TIC) technical functions that identify the information exchange requirements are:

- a. System Information Exchange and Network Management.
- b. Precise Participant Location and Identification (PPLI).
- c. Air Surveillance.
- d. Surface (Maritime) Surveillance.
- e. Subsurface (Maritime) Surveillance.
- f. Land (Ground) Surveillance.
- g. Space Surveillance.
- h. Electronic Surveillance.
- i. Electronic Warfare (EW)/Intelligence.

APPENDIX A

- j. Mission Management.
- k. Weapons Coordination and Management.
- l. Control.
- m. Information Management.

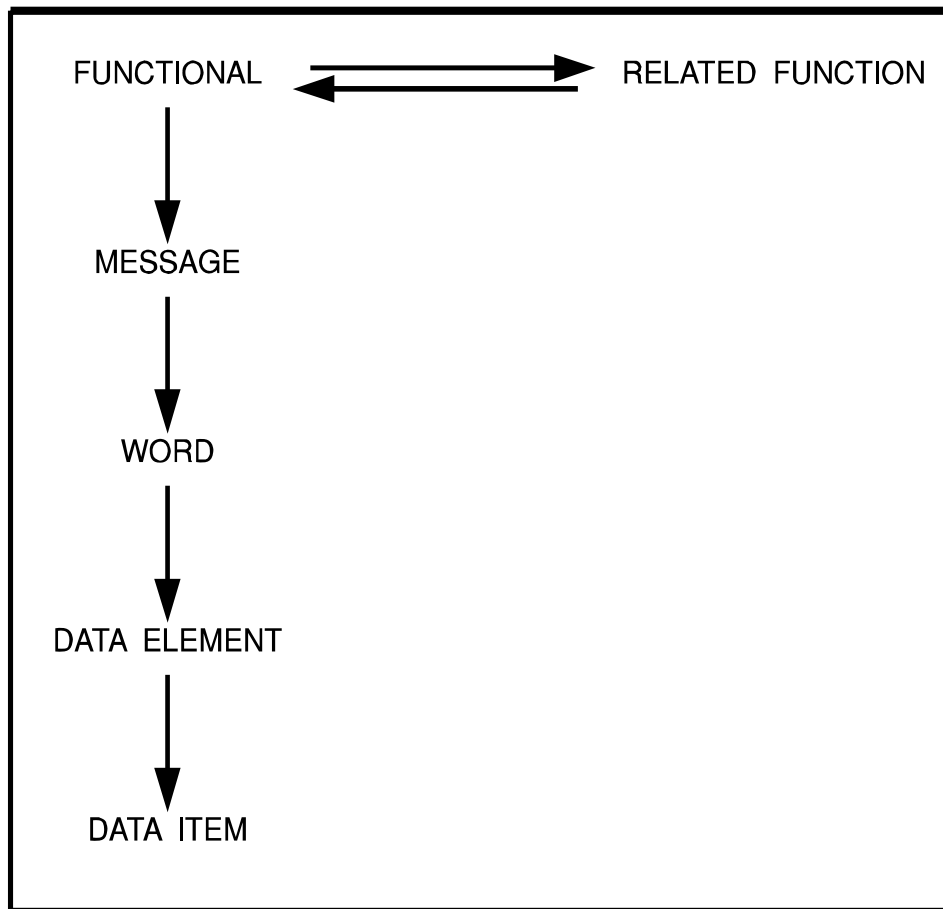


Figure A.4-1. Levels of Minimum Implementation

The messages within the Information Management function are not considered as stand-alone messages. The minimum implementation for these messages is contained within the minimum implementation for other functions. Therefore, Information Management is not treated as a function in this appendix.

APPENDIX A

Participation on the Link 16 Interface requires that all participating systems/platforms implement the following two functions:

- a. The System Information Exchange and Network Management function. This function is mandatory for participating terminals to synchronize for message transmissions.
- b. The PPLI function. This function is mandatory for system synchronization, relative navigation, and identification.

Participation on the Link 16 interface also requires that all participating systems/platforms implement their own Platform and System Status message for transmission.

A.4.2 RELATED FUNCTION MINIMUM IMPLEMENTATION

When a system implements either a mandatory or nonmandatory function for transmission, certain related functions must also be implemented to allow the interface to operate.

A.4.3 MESSAGE MINIMUM IMPLEMENTATION

The messages that are mandatory for MIN IMP are determined by the specific functional area in which a system/platform participates. Once a system implements either a mandatory or nonmandatory function, certain messages must then be implemented to allow the interface to operate. In addition, any particular message may be mandatory for MIN IMP by a system's terminal (TER), a system's tactical data system (TDS), or both. The particular messages that must be implemented by a system that implements a given function are also dependent on whether a system is operating as a Command and Control JTIDS Unit (C² JU) or as a Noncommand and Control JTIDS Unit (nonC² JU).

The MIN IMP requirements for the Weapons Coordination and Management and the Control functions are subdivided into Mission Categories. Mission Categories are grouped according to similar operational subfunctions. The Mission Categories are:

APPENDIX A

- a. Air Traffic Control (ATC).
- b. Air Intercept Control (AIC).
- c. Air Support Operations (ASO).
- d. Missile/Remotely Piloted Vehicle (MSL/RPV) Control.
- e. Surface-to-Air Missile (SAM) Unit Control.
- f. Electronic Warfare (EW).
- g. Theater Ballistic Missile Defense(TBMD).

This breakdown allows definition of more meaningful MIN IMP requirements at the lower levels, i.e., the word, data element, and data item levels. Mission Categories may be added to accommodate additional warfare subspecialties as they are provided in the interface design.

A.4.4 WORD MINIMUM IMPLEMENTATION

When a system implements either a mandatory or nonmandatory message for transmission, certain words within the message must then be implemented to allow the interface to operate.

A.4.5 DATA ELEMENT MINIMUM IMPLEMENTATION

When a system implements either a mandatory or a nonmandatory word, certain data elements within that word must also be implemented. The following data elements must always be implemented for transmission and reception when the word in which they are contained is implemented:

- a. Word Format.
- b. Label, Link 16.
- c. Sublabel, Link 16.

APPENDIX A

d. Message Length Indicator.

e. Continuation Word Label.

The required MIN IMP of other data elements within a word is listed by message. When a data element is listed as mandatory for transmission and/or reception, at least one defined value other than the default value for that data element must be implemented. When a data element is nonmandatory for MIN IMP the default value is required for transmission if a system does not implement the data element. This is required to assure that those systems which elect not to implement a data element will transmit the default value for the data element and not a value that has a meaning if the data element were processed.

In all cases, spare fields within a message shall be transmitted with a zero value and shall not be processed on reception.

A.4.6 DATA ITEM MINIMUM IMPLEMENTATION

When a system implements either a mandatory or a nonmandatory data element, it must implement at least one defined value other than the default value for that data element. Data item MIN IMP is stated when specific data items are mandatory for MIN IMP.

It should be noted that certain messages contain action value fields. When these action value fields are set to different values, the meaning or use of a message may change, as well as the mandatory MIN IMP of words within the message, data elements within the words, and data items within the data elements. These changes are reflected in the appropriate tables in this appendix.

A.4.7 WAIVER

In order for a system to participate on the Link 16 Interface, it must either meet the MIN IMP requirements or obtain a waiver. A request for a waiver for a JTIDS/MIDS user shall be submitted by the Service/Agency having control of the system and coordinated with other Services/Agencies prior to approval.

APPENDIX A

The request will identify the specific system, the item for which the waiver is requested, and the rationale for the waiver. Each waiver will be reviewed on an individual basis. This appendix was designed to provide only those functions, related functions, messages, words, data elements, and data items that must be implemented to insure that nonimplementation would not cause an adverse effect upon the information exchange among interfacing systems.

A.4.7.1 INITIAL OPERATIONAL CAPABILITY (IOC)

Systems designated as participants in the IOC may deviate from the MIN IMP requirements in order to meet the requirements of the IOC. The proposed implementation of those systems shall be submitted to JIEO for review in order to verify that the implementation does not create mutual interference or degrade the performance of the other interfacing systems.

A.4.7.2 SPECIAL AND CONTRIBUTING SYSTEMS

Special and Contributing Systems are those systems that participate in the exchange of data in one or more functional areas but have been granted waivers of some mandatory MIN IMP requirements. These are systems which:

- a. Have been designated to perform specific missions that support or are supported by one or more functional areas.
- b. Provide or require joint interface information critical to tactical operations.
- c. By their participation, enhance the mission performance of other interfacing participants.

Requests for designation as a Special or Contributing System shall be submitted to the Service/Agency having control of the system and coordinated with the other Services/Agencies prior to approval.

APPENDIX A

A.5 DETAILED REQUIREMENTS

A.5.1 SYMBOL DEFINITION

Table A.5-1 defines the symbols that are used in the MIN IMP tables.

TABLE A.5-1. Symbol Definitions

<u>SYMBOL</u>	<u>DEFINITION</u>
O	- This symbol is used on the related function MIN IMP table to denote the related functions that are mandatory for implementation if the corresponding function is implemented.
T	- Transmission mandatory.
R	- Reception mandatory.
#	- Implementation for transmission and/or reception is not required for minimum implementation. The item may be implemented by a system if desired. If the item is not implemented for transmission, the item shall be set to its "no statement" value as defined in the field coding contained in MIL-STD-6016 Section 5. When a "no statement" value is not specified in MIL-STD-6016 Section 5, the default or "no statement" value is specified in Table A.5-2 of this appendix.
X	- This symbol is used to indicate that an item shall not be implemented. This does not preclude a terminal or its system from performing required receipt/compliance transmissions and/or relay functions.
N	- The data element shall be transmitted with its "no statement" or default value set, and shall be interpreted as "no statement" or as its default value upon receipt.

APPENDIX A

A.5.2 NOTATIONS

A key to the notations used throughout the MIN IMP tables in Section A.5 is provided in Table A.5-2.

TABLE A.5-2. Explanation of Numerical Notations

<u>NOTE NUMBER</u>	<u>EXPLANATION</u>
1 -	One of the indicated Surveillance functions must be implemented.
2 -	At least one of these functions must be implemented for reception.
3 -	Required for data forwarding units.
4 -	The applicable PPLI message for the type of unit must be implemented.
5 -	Other functional areas may require implementation of this message for transmission.
6 -	At least one of the indicated Surveillance messages other than the J3.7 message must be implemented.
7 -	At least one of the indicated Surveillance messages must be implemented.
8 -	C ² JUs which coordinate directly with Link 11/11B, NATO Link 1, ATDL-1, or IJMS units must implement this message for reception and display, but for transmission only in response to a request. C ² JUs which originate Link 11/11B TNs, NATO Link 1 TNs, ATDL-1 TNs, and/or IJMS SRNs and/or forward Link 11/11B TNs, NATO Link 1 TNs, ATDL-1 TNs, and/or IJMS SRNs to Link 11 must implement this message.
9 -	C ² JUs are required to implement for transmission their own platform and system status. C ² JUs are required to implement this message for reception the status message(s) appropriate to the unit(s) under their control.
10 -	Required for implementation by units with command authority.
11 -	Implementation of this message is required if the unit is performing precision landing, precision bombing, or RPV control.
12 -	The message required for implementation is dependent on the type of missile being controlled.
13 -	JUs shall implement their own platform and system status.
14 -	Required for implementation when capable of RPV control.
15 -	Notation not used.
16 -	Notation not used.

APPENDIX A

TABLE A.5-2. Explanation of Numerical Notations (continued)

<u>NOTE NUMBER</u>	<u>EXPLANATION</u>
17 -	Provided by the host TDS with the default value in the terminal.
18 -	Required when participating in Net Control Station (NCS) communities.
19 -	Required for NCSs.
20 -	Required for the Crypto Network Manager or Network Manager.
21 -	The Connectivity Quality(s) and Track Number(s) implemented must correspond, that is, Connectivity Quality, n must be implemented with Track Number JU, n, etc.
22 -	Default value is 0.
23 -	Default value is 8191.
24 -	Default value is 2047.
25 -	Must be implemented if Surveillance messages are received.
26 -	Required if NATO Link 1 TNs are implemented. Default value is 0.
27 -	Required if ATDL-1 TNs are implemented. Default value is 0.
28 -	Required if Link 11/11B TNs are implemented. Default value is 0.
29 -	Required if IJMS SRNs are implemented. Default value is 0.
30 -	Required if ATDL-1 TNs or IJMS SRNs are implemented.
31 -	If this field is implemented, the Fuel Function field must be implemented.
32 -	Either IJMS SRNs or ATDL-1 TNs must be implemented.
33 -	At least one of the mode/code applicability indicators must be transmitted/received with its corresponding code. The Mode IV Indicator Applicability field is required for reception if the Mode IV Indicator field is implemented for transmission.
34 -	At least one of the environment/category, special processing simulation, exercise, reference point, electronic warfare or identity filter indicators must be implemented.
35 -	Default value is 63.
36 -	If value 8 is not implemented for reception, then value 10 must not be implemented for reception.

APPENDIX A

TABLE A.5-2. Explanation of Numerical Notations (continued)

<u>NOTE NUMBER</u>	<u>EXPLANATION</u>
37 -	NonC ² JUs must implement for reception either the error value set, the command value set, or both value sets.
38 -	Required for implementation when data link control of autopilot is available.
39 -	Required for transmission and for reception if the Mission Category of Ground Attack/Stores Delivery is implemented. For all other Mission Categories set this field to Value 0.
40 -	Default value is 1.
41 -	Not Used.
42 -	Not Used.
43 -	Not Used.
44 -	The platform data element(s) to be implemented is(are) the same as the Environment/Category of tracks for which the JU implements the Platform field in J3 messages.
45 -	If this field is implemented, then the Land(Ground) Specific Type Indicator must be implemented.
46 -	Required for implementation by C ² units for units under their control.
47 -	This field is mandatory for transmission when the Frequency/Frequency Range Indicator is set to value 1.
48 -	Either the J3.7C3 word or the J3.7C4 word must be implemented.
49 -	If the Emitter Number Field is implemented, this field must be implemented.
50 -	All units must implement Burnable Fuel(FL FCT=0).
51 -	Not Used.
52 -	One of these fields must be implemented.
53 -	If this field is implemented, the Environment/Category field must be implemented.
54 -	This message is not originated by the terminal, but the information is passed through the terminal for transmission.
55 -	Not Used.

MIL-STD-6016B

APPENDIX A

TABLE A.5-2. Explanation of Numerical Notations (continued)

<u>NOTE NUMBER</u>	<u>EXPLANATION</u>
56 -	If Identity or Identity Amplifying Descriptor is implemented, then Exercise Indicator shall be implemented. Default value is 0.
57 -	Either Track Number, Reference or Index Number must be implemented.
58 -	This field must be implemented if either Elevation Angle or Altitude, 25 Ft is implemented.
59 -	Optional for transmission and mandatory for reception if Allied or Hostile Missile Engagement Zones are implemented in Point Type/Point Amplification fields.
60 -	If this field is implemented, then the Air Specific Type Indicator field must be implemented.
61 -	If the Pointer field is set to call attention of another JU to a geographic location, the J12.6E0 word is optional.
62 -	Required when slaved points are implemented.
63 -	Required when either slaved true points or points with independent movement are implemented.
64 -	Required when Line and/or Area is implemented in the Point/Line/Area Descriptor field.
65 -	Required for implementation of nonreal-time tracks. Real-time track implementation is NN.
66 -	N# when Request for Assume Control = 2.
67 -	If the J12.0 message MAD field value 23 is implemented, this Pairing Action field value must be implemented.
68 -	If capable of transmitting a J12.0 message MAD field value 1 and the Objective TN is a tanker, this Pairing Action field value must be implemented.
69 -	If the J12.0 message MAD field value 4 is implemented, this Pairing Action field value must be implemented.
70 -	This MAD field value must be implemented for transmission if a J9.0 message Threat Warning Condition field value 1, White, is implemented for reception.
71 -	This MAD field value must be implemented for transmission if a J9.0 message Threat Warning Condition field value 2, Yellow, is implemented for reception.

APPENDIX A

TABLE A.5-2. Explanation of Numerical Notations (continued)

<u>NOTE NUMBER</u>	<u>EXPLANATION</u>
72 -	This MAD field value must be implemented for transmission if a J9.0 message Threat Warning Condition field value 3, Red, is implemented for reception.
73 -	This MAD field value must be implemented for transmission if the J9.0 message Command field value 14, Proceed to Point, is implemented for reception.
74 -	If this field is implemented, the applicable rate field shall be implemented.
75 -	This MAD field value must be implemented for transmission if the J9.0 message Command field value 16, Conduct Procedures Indicated, and Command Mission field value 1, Search and Rescue; or Command field value 18, Assume Duties Indicated, and Duty Assignment field value 17, Search and Rescue, is implemented for reception.
76 -	This MAD field value must be implemented for transmission if the J9.0 message Command field value 21, Return to Base, is implemented for reception.
77 -	This MAD field value must be implemented for transmission if the J9.0 message Command field value 24, Intervene, is implemented for reception.
78 -	This MAD field value must be implemented for transmission if the J9.0 message Command field value 18, Assume Duties Indicated, and Duty Assignment field value 28, Combat Air Patrol/Antiair Control Unit Control Ship, are implemented for reception.
79 -	If any value other than No Statement is implemented, value 127 must also be implemented. Specific value implementations are delineated in Section 4, Table 4.12-2.
80 -	If the Frequency Exponent field is implemented, this field must be implemented.
81 -	If the Frequency Intercept field is implemented, this field must be implemented.
82 -	Default value is 511.
83 -	If the Ambiguous Type Probability field is implemented, this field must be implemented.
84 -	Required for implementation of units capable of Link 16 control.
85 -	Required for implementation by units capable of voice control only.

APPENDIX A

TABLE A.5-2. Explanation of Numerical Notations (continued)

<u>NOTE NUMBER</u>	<u>EXPLANATION</u>
86 -	Required for implementation by units capable of Link 4A control.
87 -	If the J12.0 message MAD field value 11 is implemented, this WES field value must be implemented.
88 -	If the J12.0 message MAD field value 24 is implemented, this WES field value must be implemented.
89 -	Required if the J3.5C3 word is implemented.
90 -	Required for systems which report tracks of Unknown E/C detected by other than EW means; N22# for all other systems.
91 -	Required for implementation when tracks of Unknown E/C detected by other than EW means are implemented.
92 -	Required when slaved relative points are implemented, or Sonobuoy Type, 1 implemented.
93 -	Because Point Amplifications for Point Type 8 are an extension list of the amplifiers for Point Type 7, they do not include a default (No Statement) value. Therefore, platforms implementing Point Type 8 shall also implement Point Type 7.
94 -	Either the Depth, 15 Meters field or Depth Category field must be implemented.
95 -	Required when repromulgation relay filtering functions are implemented.
96 -	C ² JUs are required to implement for transmission their own platform and system status. C ² JUs are required to implement for reception the platform and system status message(s) appropriate to the unit(s) with whom they coordinate.
97 -	Required for implementation by units with command authority. Mandatory for transmission to a single addressed unit; optional for broadcast transmission with TN Addressee field set to 00177 octal.
98 -	When Point Type = 7 and Point Amplification = 13, value 0 or 4 shall be implemented.
99 -	Required for TACAIR Transport activity.
100 -	One of these values must be implemented, except by TACAIR Transport.
101 -	Not required by TACAIR Transport.
102 -	Mandatory if the J3.6 Space Track message is implemented for transmission of ballistic missile tracks.

APPENDIX A

TABLE A.5-2. Explanation of Numerical Notations (continued)

<u>NOTE NUMBER</u>	<u>EXPLANATION</u>
103	- If implementing the J3.6 Space Track message for ballistic missile tracks for reception only, the implementation is optional. If implementing for transmission and reception, the implementation is mandatory.
104	- Required if Track Number, Related 2 is implemented. Default value is 0.
105	- Required when Point Type = 7, Point Amp = 9 or 10 is implemented; NN otherwise.
106	- Required when Point Type = 7, Point Amp = 11 is implemented; NN otherwise.
107	- If the C2 or C2 and C3 words are implemented, this field must be implemented.
108	- This field is mandatory for implementation if the J13.0C1 word is implemented.
109	- If the J12.0 message MAD field value 16 is implemented, this Pairing Action field value must be implemented.
110	- T for systems reporting friendly interceptor missiles, # otherwise.
111	- T for systems reporting friendly interceptor missiles, # otherwise. If this field is implemented then the Air Specific Type Indicator field must be implemented.
112	- Environment/Category shall be set to other than No Statement/Unknown. Not required for Pointer reports.
113	- All response values are required for implementation.
114	- Required if Sonobuoy Type, 1 implemented, otherwise x/x.
115	- C ² JUs are required to implement for transmission to the SAM unit(s) under their control.
116	- Required for SAM units.
117	- Required if implementing Point Type = 4 and Point Amplification = 3 or 6. When the J3.0C5 is used for this purpose, only the Area Major Axis, 4 field is used and all other fields in the J3.0C5 shall be set to No Statement.

APPENDIX A

A.5.3 LINK 16 FUNCTIONAL MINIMUM IMPLEMENTATION

A system identified as a Link 16 participant must implement the System Information and Network Management function and the PPLI function. These two functions are specified as MIN IMP whether the system is a C² JU or a nonC² JU.

Additional functions that will be implemented by a system because of Service/Agency requirements are specified in MIL-STD-6016, Appendix D, System Implementation. These additional requirements are not MIN IMP for Link 16 Interface participation but are Service/Agency requirements for their own systems. System implementation requirements at each level in the MIN IMP hierarchy must be considered before proceeding into the next lower level of MIN IMP definition.

A.5.4 LINK 16 RELATED FUNCTION MINIMUM IMPLEMENTATION

Link 16 related function MIN IMP can be determined after a system has specified its:

- a. Functional MIN IMP, i.e., the System Information and Network Management function and the PPLI function.
- b. Functional system implementation as described in Appendix D.
- c. Participation on the Link 16 Interface as a C² JU or a nonC² JU.

A system's related function MIN IMP is determined, for C² JUs and nonC² JUs respectively, by entering either Table A.5-3 or Table A.5-4 from the left at each line corresponding to a function implemented by the system. Proceeding to the right across the line, a bullet (o) in a column indicates the named function in that column that is a related function MIN IMP requirement.

MIL-STD-6016B

APPENDIX A

THIS PAGE INTENTIONALLY LEFT BLANK

TABLE A.5-3. Related Function Minimum Implementation for C² JUs

FUNCTION IMPLEMENTED	RELATED FUNCTION TO BE IMPLEMENTED											
	SYSTEM INFO & NET MGMT	PPLI	AIR SURV	SURF (MAR) SURV	SUB (MAR) SURV	LND (GND) SURV	SPACE SURV	ELEC SURV	EW/INT	MISS MGMT	WPN COORD & MGMT	CONTROL
SYSTEM INFO & NET MGMT	0	0										
PPLI	0	0										
AIR SURV	0	0	0									
SURF (MAR) SURV	0	0		0								
SUB (MAR) SURV	0	0			0							
LND (GND) SURV	0	0				0						
SPACE SURV	0	0					0					
ELEC SURV	0	0	0 ¹	0 ¹	0 ¹	0 ¹	0 ¹	0				
EW/INT	0	0	0 ¹	0 ¹	0 ¹	0 ¹	0 ¹	0 ¹	0			
MISS MGMT	0	0	0 ²	0 ²	0 ²	0 ²	0 ²	0 ²	0 ²	0	0	
WPN COORD & MGMT	0	0	0 ²	0 ²	0 ²	0 ²	0 ²	0 ²			0	
CONTROL	0	0	0								0	0

TABLE A.5-4. Related Function Minimum Implementation for NonC² JUs

FUNCTION IMPLEMENTED	RELATED FUNCTION TO BE IMPLEMENTED											
	SYSTEM INFO & NET MGMT	PPLI	AIR SURV	SURF (MAR) SURV	SUB (MAR) SURV	LND (GND) SURV	SPACE SURV	ELEC SURV	EW/INT	MISS MGMT	WPN COORD & MGMT	CONTROL
SYSTEM INFO & NET MGMT	o	o										
PPLI	o	o										
AIR SURV												
SURF (MAR) SURV												
SUB (MAR) SURV												
LND (GND) SURV												
SPACE SURV												
ELEC SURV												
EW/INT	o	o							o			
MISS MGMT												
WPN COORD & MGMT												
CONTROL	o	o	o								o	o

APPENDIX A

A.5.5 LINK 16 MESSAGE MINIMUM IMPLEMENTATION

Link 16 message MIN IMP can be determined after a system has specified its:

- a. Functional MIN IMP, i.e., the System Information and Network Management function and the PPLI function.
- b. Functional system implementation as described in Appendix D.
- c. Participation on the Link 16 Interface as a C² JU or a nonC² JU.
- d. Related function MIN IMP.

After using the criteria above to determine its functional implementation a system may determine its message MIN IMP by following the criteria in paragraphs A.5.5.1 through A.5.5.7.

A.5.5.1 TERMINAL BASELINE MESSAGE MINIMUM IMPLEMENTATION

There is a terminal baseline message MIN IMP that is valid for any function being implemented and must be accomplished by a system's terminal. The terminal baseline MIN IMP is defined in terms of a JU's capabilities in Table A.5-5.

A.5.5.2 NET CONTROL STATION MINIMUM IMPLEMENTATION

A system in a Net Control Station Community must follow the MIN IMP in Table A.5-6 in addition to the baseline message MIN IMP defined in Table A.5-5.

A.5.5.3 NETWORK MANAGER MINIMUM IMPLEMENTATION

A JU that is assigned the responsibility of the Network Manager must follow the MIN IMP in Table A.5-7 in addition to the Baseline message MIN IMP defined in Table A.5-5. Requirements are stated with reference to what type of network structure is being used by the Network Manager.

APPENDIX A

A.5.5.4 DISTRIBUTED ROUTING MINIMUM IMPLEMENTATION

A JU participating in distributed routing must follow the MIN IMP in Table A.5-8 in addition to the baseline message MIN IMP defined in Table A.5-5.

A.5.5.5 COMMON MESSAGE MINIMUM IMPLEMENTATION FOR TACTICAL DATA SYSTEMS

The message MIN IMP in Table A.5-9 is valid for any function being implemented.

A.5.5.6 TIME SLOT REALLOCATION MESSAGE MINIMUM IMPLEMENTATION

A JU participating in a Time Slot Reallocation pool must follow the MIN IMP in Table A.5-10 in addition to the baseline message MIN IMP defined in Table A.5-5.

A.5.5.7 C² JU MESSAGE MINIMUM IMPLEMENTATION BY FUNCTION

After a C² JU has determined the functions it will implement, Table A.5-11 should be used to determine message implementation requirements to support those functions. Enter this table from the top at a function that will be implemented by a C² JU. Proceed down the column to determine the combined transmit and receive implementation requirements for each message number identified in the far left column of the table.

A.5.5.8 NONC² JU MESSAGE MINIMUM IMPLEMENTATION BY FUNCTION

After a nonC² JU has determined the functions it will implement, Table A.5-12 should be used to determine message implementation requirements to support those functions. Enter this table from the top at a function that will be implemented by a nonC² JU. Proceed down the column to determine the combined transmit and receive implementation requirements for each message number identified in the far left column of the table.

APPENDIX A

A.5.6 LINK 16 WORD, DATA ELEMENT, AND DATA ITEM MINIMUM IMPLEMENTATION

MIN IMP requirements at the word, data element and data item levels are contained in the tables beginning with Table A.5-J0.0. The tables are arranged by message number order. To determine the word and data element MIN IMP requirements, turn to the table(s) for the appropriate message number. The method of interpreting word, data element, and data item MIN IMP is explained in paragraphs A.5.6.1, A.5.6.2, and A.5.6.3.

MIL-STD-6016B

APPENDIX A

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

APPENDIX A

TABLE A.5-5. Terminal Baseline Message Implementation

<u>MESSAGE</u>	<u>TERMINAL IMPLEMENTATION</u>
J0.0	TR
J0.1	TR
J0.2	TR
J0.3	T54R
J0.4	T54R
J0.5	T54R
J0.6	T54R
J0.7	##
J2.0	T3R
J2.2	T4R
J2.3	T4R
J2.4	T4R
J2.5	T4R
J2.6	T4R
J31.0	TR
J31.1	T54R
J31.7	TR
RTT-A	TR
RTT-B	TR
RTT-REP	TR

TABLE A.5-6 Net Control Station Message Minimum Implementation

<u>MESSAGE</u>	<u>TDS IMPLEMENTATION</u>
J0.6	T
J1.1	TR
J1.3	TR
J1.4	TR
J1.5	R
J1.6	R
J8.0	R

MIL-STD-6016B

APPENDIX A

TABLE A.5-7. Network Manager Message Minimum Implementation

<u>NETWORK STRUCTURE</u>	<u>MESSAGE</u>	<u>TDS IMPLEMENTATION</u>
Static Assignment of Time Slots	None	---
Dynamic Assignment of Time Slots	J0.3	T
	J0.4	T
	J0.6	TR
Net Control Station Community	J0.6	R
	J1.1	R
	J1.4	R
	J1.5	T
	J1.6	T
	J8.0	TR
Over-the-Air Rekeying	J31.0	TR
	J31.1	T
Repromulgation Relay	J0.5	T

TABLE A.5-8. Distributed Routing Message Minimum Implementation

<u>MESSAGE</u>	<u>TDS IMPLEMENTATION</u>
J1.0	TR
J1.1	TR
J1.2	T95R95
J1.3	TR

TABLE A.5-9. Common Message Minimum Implementation for Tactical Data Systems

<u>MESSAGE</u>	<u>TDS IMPLEMENTATION</u>
J2.0	T3R
J2.2	T4R
J2.3	T4R
J2.4	T4R
J2.5	T4R
J2.6	T4R
J7.0	#5R
J28's	##
J29's	TBD
J30's	TBD

MIL-STD-6016B

APPENDIX A

TABLE A.5-10. Time Slot Reallocation Message Minimum Implementation

MESSAGE

TDS IMPLEMENTATION

J0.7

TR

MIL-STD-6016B

APPENDIX A

THIS PAGE INTENTIONALLY LEFT BLANK

TABLE A.5-11. Message Minimum Implementation by Function for C² JUs (Sheet 1 of 6)

MSG MIN IMP	FUNCTION TO BE IMPLEMENTED							
	AIR SURV	SURF (MAR) SURV	SUB (MAR) SURV	LND (GND) SURV	SPACE SURV	ELEC SURV	EW/INT	MISS MGMT
J3.0	##	##	##	##	TR	##	##	#R
J3.1	#R	#R	#R	#R	##	##	##	#R
J3.2	TR	##	##	##	##	T6R6	#R7	#R7
J3.3	##	##	##	##	##	T6R6	#R7	#R7
J3.4	##	##	TR	##	##	##	##	##
J3.5	##	##	##	TR	##	T6R6	#R7	#R7
J3.6	##	##	##	##	TR	##	##	##
J3.7	##	##	##	##	##	TR	#R7	#R7
J5.4	##	##	#R	##	##	##	##	##
J6.0	##	##	##	##	##	##	TR	#R
J7.0	TR	TR	TR	TR	TR	TR	TR	TR
J7.1	#R	#R	#R	#R	#R	#R	#R	#R
J7.2	TR	TR	##	##	##	##	##	##
J7.3	##	##	##	##	##	##	##	##
J7.4	T8R8	T8R8	T8R8	T8R8	##	##	T8R8	T8R8
J7.5	TR	TR	TR	TR	##	##	TR	TR
J7.6	##	##	##	##	##	##	##	##
J7.7	##	##	##	##	##	##	##	##
J8.1	##	##	##	##	##	##	##	##
J9.0	##	##	##	##	##	##	##	TR
J9.1	##	##	##	##	##	##	##	##
J10.2	##	##	##	##	##	##	##	#R
J10.3	##	##	##	##	##	##	##	##
J10.5	##	##	##	##	##	##	##	#R
J10.6	##	##	##	##	##	##	##	#R
J12.0	##	##	##	##	##	##	##	##
J12.1	##	##	##	##	##	##	##	##

TABLE A.5-11. Message Minimum Implementation by Function for C² JUs (Sheet 2 of 6)

MSG MIN IMP	FUNCTION TO BE IMPLEMENTED							
	AIR SURV	SURF (MAR) SURV	SUB (MAR) SURV	LND (GND) SURV	SPACE SURV	ELEC SURV	EW/INT	MISS MGMT
J12.2	##	##	##	##	##	##	##	##
J12.3	##	##	##	##	##	##	##	##
J12.4	##	##	##	##	##	##	##	##
J12.5	##	##	##	##	##	##	##	##
J12.6	##	##	##	##	##	##	##	##
J12.7	##	##	##	##	##	##	##	##
J13.0	##	##	##	##	##	##	##	##
J13.2	##	##	##	##	##	##	T9R	#R9
J13.3	##	##	##	##	##	##	T9R	#R9
J13.4	##	##	##	##	##	##	T9R	#R9
J13.5	##	##	##	##	##	##	T9R	#R9
J14.0	##	##	##	##	##	##	#R	##
J14.2	##	##	##	##	##	##	TR	##
J15.0	##	##	##	##	##	##	##	##
J17.0	##	##	##	##	##	##	##	##

TABLE A.5-11. Message Minimum Implementation by Function for C² JUs (Sheet 3 of 6)

MSG MIN IMP	FUNCTIONS TO BE IMPLEMENTED						
	WPN COORD & MGMT						
	ATC	AIC	ASO	MSL/RPV	SAM UNIT CONT	TBMD	EW
J3.0	#R	#R	#R	#R	##	#R	##
J3.1	#R	#R	#R	##	##	##	##
J3.2	#R	#R	#R	#R	#R	#R	#R
J3.3	##	##	##	##	##	##	#R7
J3.4	##	##	##	##	##	##	##
J3.5	##	##	#R	##	##	##	#R7
J3.6	##	##	##	##	##	#R	##
J3.7	##	##	##	##	##	##	#R7
J5.4	##	##	##	##	##	##	##
J6.0	##	##	##	##	##	##	##
J7.0	TR	TR	TR	TR	TR	TR	TR
J7.1	#R	#R	#R	#R	#R	#R	#R
J7.2	##	##	##	##	##	##	##
J7.3	##	##	##	##	##	##	##
J7.4	T8R8	T8R8	T8R8	T8R8	T8R8	T8R8	T8R8
J7.5	#R	#R	#R	##	#R	##	#R
J7.6	##	##	##	##	##	##	##
J7.7	##	##	##	##	##	##	##
J8.1	##	##	##	##	##	##	##
J9.0	T10R	T10R	T10R	T10R	T10R	T10R	##
J9.1	##	##	##	##	##	##	##
J10.2	X#	#R	#R	#R	#R	#R	##
J10.3	TR	TR	TR	TR	##	##	##
J10.5	#R	#R	#R	#R	##	##	##
J10.6	##	TR	##	##	##	##	##
J12.0	##	##	##	##	##	##	##

TABLE A.5-11. Message Minimum Implementation by Function for C² JUs (Sheet 4 of 6)

MSG MIN IMP	FUNCTIONS TO BE IMPLEMENTED						
	WPN COORD & MGMT						
	ATC	AIC	ASO	MSL/RPV	SAM UNIT CONT	TBMD	EW
J12.1	##	##	##	##	##	##	##
J12.2	##	##	##	##	##	##	##
J12.3	##	##	##	##	##	##	##
J12.4	##	##	##	##	##	##	##
J12.5	##	##	##	##	##	##	##
J12.6	X#	##	##	##	##	##	##
J12.7	X#	##	##	##	##	##	##
J13.0	##	##	##	##	##	##	##
J13.2	T13#	T13#	T13#	T13#	T13#	T13#	T13#
J13.3	T13#	T13#	T13#	T13#	T13#	T13#	T13#
J13.4	T13#	T13#	T13#	T13#	T13#	T13#	T13#
J13.5	T13#	T13#	T13#	T13#	T13#	T13#	T13#
J14.0	##	##	##	##	##	##	#R
J14.2	##	##	##	##	##	##	TR
J15.0	##	##	##	##	##	##	##
J17.0	##	##	##	##	##	##	##

TABLE A.5-11. Message Minimum Implementation by Function for C² JUs (Sheet 5 of 6)

MSG MIN IMP	FUNCTIONS TO BE IMPLEMENTED					
	CONTROL					
	ATC	AIC	ASO	MSL/RPV	SAM UNIT CONT	EW
J3.0	#R	#R	#R	#R	##	##
J3.1	TR	TR	TR	##	##	##
J3.2	TR	TR	#R	TR	TR	T7R7
J3.3	##	##	T7R7	##	##	T7R7
J3.4	##	##	##	##	##	##
J3.5	##	##	T7R7	##	##	T7R7
J3.6	##	##	##	##	##	##
J3.7	##	##	##	##	##	T7R7
J5.4	##	##	##	##	##	##
J6.0	##	##	##	##	##	##
J7.0	TR	TR	TR	TR	TR	TR
J7.1	#R	#R	#R	#R	#R	#R
J7.2	##	##	##	##	##	##
J7.3	##	##	##	##	##	##
J7.4	T8R8	T8R8	T8R8	T8R8	T8R8	T8R8
J7.5	TR	TR	TR	##	TR	#R
J7.6	##	##	##	##	##	##
J7.7	##	##	##	##		##
J8.1	##	##	##	##	##	##
J9.0	#R	#R	#R	#R	##	##
J9.1	##	##	##	##	##	##
J10.2	X#	TR	TR	TR	TR	##
J10.3	TR	TR	TR	TR	##	##
J10.5	TR	TR	TR	TR	##	##
J10.6	TR	TR	##	##	##	##
J12.0	##	T#	T#	##	##	##

TABLE A.5-11. Message Minimum Implementation by Function for C² JUS (Sheet 6 of 6)

MSG MIN IMP	FUNCTIONS TO BE IMPLEMENTED					
	CONTROL					
	ATC	AIC	ASO	MSL/RPV	SAM UNIT CONT	EW
J12.1	T#	##	##	##	##	##
J12.2	T11#	##	T11#	T11#	##	##
J12.3	##	##	T#	T12#	##	##
J12.4	TR	TR	TR	T#	##	##
J12.5	##	T#	##	X#	##	##
J12.6	X#	#R	#R	X#	##	X#
J12.7	X#	##	##	##	##	##
J13.0	##	##	##	##	##	##
J13.2	T9R9	T9R9	T9R9	T9R9	T9R9	T9R9
J13.3	T9R9	T9R9	T9R9	T9R9	T9R9	T9R9
J13.4	T9R9	T9R9	T9R9	T9R9	T9R9	T9R9
J13.5	T9R9	T9R9	T9R9	T9R9	T9R9	T9R9
J14.0	##	##	##	##	##	#R
J14.2	##	##	##	##		TR
J15.0	##	##	##	##	##	##
J17.0	##	##	##	##	##	##

TABLE A.5-12. Message Minimum Implementation by Function for NonC² JUs (Sheet 1 of 6)

MSG MIN IMP	FUNCTION TO BE IMPLEMENTED							
	AIR SURV	SURF (MAR) SURV	SUB (MAR) SURV	LND (GND) SURV	SPACE SURV	ELEC SURV	EW/INT	MISS MGMT
J3.0	X#	X#	X#	X#	X#	X#	X#	X#
J3.1	X#	X#	X#	X#	X#	X#	X#	X#
J3.2	XR	X#	X#	X#	X#	X#	X#	X#
J3.3	X#	XR	X#	X#	X#	X#	X#	X#
J3.4	X#	X#	X#	X#	X#	X#	X#	X#
J3.5	X#	X#	X#	X#	X#	X#	X#	X#
J3.6	X#	X#	X#	X#	XR	X#	X#	X#
J3.7	X#	X#	X#	X#	X#	X#	X#	X#
J5.4	X#	X#	X#	X#	X#	X#	X#	X#
J6.0	X#	X#	X#	X#	X#	X#	X#	X#
J7.0	XR	XR	XR	XR	XR	XR	XR	XR
J7.1	X#	X#	X#	X#	X#	X#	X#	X#
J7.2	X#	X#	X#	X#	X#	X#	X#	X#
J7.3	X#	X#	X#	X#	X#	X#	X#	X#
J7.4	X#	X#	X#	X#	X#	X#	X#	X#
J7.5	X#	X#	X#	X#	X#	X#	X#	X#
J7.6	X#	X#	X#	X#	X#	X#	X#	X#
J7.7	X#	X#	X#	X#	X#	X#	X#	X#
J8.1	X#	X#	X#	X#	X#	X#	X#	X#
J9.0	X#	X#	X#	X#	X#	X#	X#	X#
J9.1	X#	X#	X#	X#	X#	X#	X#	X#
J10.2	X#	X#	X#	X#	X#	X#	X#	X#
J10.3	X#	X#	X#	X#	X#	X#	X#	X#
J10.5	X#	X#	X#	X#	X#	X#	X#	X#
J10.6	X#	X#	X#	X#	X#	X#	X#	X#
J12.0	X#	X#	X#	X#	X#	X#	X#	X#
J12.1	X#	X#	X#	X#	X#	X#	X#	X#

TABLE A.5-12. Message Minimum Implementation by Function for NonC² JUs (Sheet 2 of 6)

MSG MIN IMP	FUNCTION TO BE IMPLEMENTED							
	AIR SURV	SURF (MAR) SURV	SUB (MAR) SURV	LND (GND) SURV	SPACE SURV	ELEC SURV	EW/INT	MISS MGMT
J12.2	X#	X#	X#	X#	X#	X#	X#	X#
J12.3	X#	X#	X#	X#	X#	X#	X#	X#
J12.4	X#	X#	X#	X#	X#	X#	X#	X#
J12.5	X#	X#	X#	X#	X#	X#	X#	X#
J12.6	X#	X#	X#	X#	X#	X#	X#	X#
J12.7	X#	X#	X#	X#	X#	X#	X#	X#
J13.0	X#	X#	X#	X#	X#	X#	X#	X#
J13.2	X#	X#	X#	X#	X#	X#	T9#	X#
J13.3	X#	X#	X#	X#	X#	X#	T9#	X#
J13.4	X#	X#	X#	X#	X#	X#	T9#	X#
J13.5	X#	X#	X#	X#	X#	X#	T9#	X#
J14.0	X#	X#	X#	X#	X#	X#	##	X#
J14.2	X#	X#	X#	X#	X#	##	##	X#
J15.0	##	##	##	##	##	##	##	##
J17.0	##	##	##	##	##	##	##	##

TABLE A.5-12. Message Minimum Implementation by Function for NonC² JUs (Sheet 3 of 6)

MSG MIN IMP	FUNCTIONS TO BE IMPLEMENTED						
	WPN COORD & MGMT						
	ATC	AIC	ASO	MSL/RPV	SAM UNIT CONT	TBMD	EW
J3.0	X#	X#	X#	X#	X#	X#	X#
J3.1	X#	X#	X#	X#	X#	X#	X#
J3.2	X#	X#	X#	X#	X#	X#	X#
J3.3	X#	X#	X#	X#	X#	X#	X#
J3.4	X#	X#	X#	X#	X#	X#	X#
J3.5	X#	X#	X#	X#	X#	X#	X#
J3.6	X#	X#	X#	X#	X#	X#	X#
J3.7	X#	X#	X#	X#	X#	X#	X#
J5.4	X#	X#	X#	X#	X#	X#	X#
J6.0	X#	X#	X#	X#	X#	X#	X#
J7.0	XR	XR	XR	XR	XR	XR	XR
J7.1	X#	X#	X#	X#	X#	X#	X#
J7.2	X#	X#	X#	X#	X#	X#	X#
J7.3	X#	X#	X#	X#	X#	X#	X#
J7.4	X#	X#	X#	X#	X#	X#	X#
J7.5	X#	X#	X#	X#	X#	X#	X#
J7.6	X#	X#	X#	X#	X#	X#	X#
J7.7	X#	X#	X#	X#	X#	X#	X#
J8.1	X#	X#	X#	X#	X#	X#	X#
J9.0	X#	X#	X#	X#	X#	X#	X#
J9.1	X#	X#	X#	X#	X#	X#	X#
J10.2	X#	X#	X#	X#	X#	X#	X#
J10.3	X#	X#	X#	X#	X#	X#	X#
J10.5	X#	X#	X#	X#	X#	X#	X#
J10.6	X#	X#	X#	X#	X#	X#	X#
J12.0	X#	X#	X#	X#	X#	X#	X#

TABLE A.5-12. Message Minimum Implementation by Function for NonC² JUs (Sheet 4 of 6)

MSG MIN IMP	FUNCTIONS TO BE IMPLEMENTED						
	WPN COORD & MGMT						
	ATC	AIC	ASO	MSL/RPV	SAM UNIT CONT	TBMD	EW
J12.1	X#	X#	X#	X#	X#	X#	X#
J12.2	X#	X#	X#	X#	X#	X#	X#
J12.3	X#	X#	X#	X#	X#	X#	X#
J12.4	X#	X#	X#	X#	X#	X#	X#
J12.5	X#	X#	X#	X#	X#	X#	X#
J12.6	X#	X#	X#	X#	X#	X#	X#
J12.7	X#	X#	X#	X#	X#	X#	X#
J13.0	X#	X#	X#	X#	X#	X#	X#
J13.2	X#	X#	X#	X#	X#	X#	X#
J13.3	X#	X#	X#	X#	X#	X#	X#
J13.4	X#	X#	X#	X#	X#	X#	X#
J13.5	X#	X#	X#	X#	X#	X#	X#
J14.0	X#	X#	X#	X#	X#	X#	X#
J14.2	X#	X#	X#	X#	X#	X#	X#
J15.0	##	##	##	##	##	X#	##
J17.0	##	##	##	##	##	X#	##

TABLE A.5-12. Message Minimum Implementation by Function for NonC² JUs (Sheet 5 of 6)

MSG MIN IMP	FUNCTIONS TO BE IMPLEMENTED					
	CONTROL					
	ATC	AIC	ASO	MSL/RPV	SAM UNIT CONT	EW
J3.0	X#	XR	XR	X#	X#	X#
J3.1	X#	X#	X#	X#	X#	X#
J3.2	X#	XR	XR	X#	X#	X#
J3.3	X#	X#	XR	X#	X#	X#
J3.4	X#	X#	X#	X#	X#	X#
J3.5	X#	X#	XR	X#	X#	X#
J3.6	X#	X#	X#	X#	X#	X#
J3.7	X#	X#	X#	X#	X#	X#
J5.4	X#	X#	X#	X#	X#	X#
J6.0	##	##	##	##	##	X#
J7.0	XR	XR	XR	XR	XR	XR
J7.1	##	##	##	##	##	X#
J7.2	X#	X#	X#	X#	X#	X#
J7.3	X#	X#	X#	X#	X#	X#
J7.4	X#	X#	X#	X#	X#	X#
J7.5	X#	X#	X#	X#	X#	X#
J7.6	X#	X#	X#	X#	X#	X#
J7.7	X#	X#	X#	X#	X#	X#
J8.1	X#	X#	X#	X#	X#	X#
J9.0	X#	X#	X#	X#	X#	X#
J9.1	X#	X#	X#	X#	X#	X#
J10.2	X#	XR	XR	X#	X#	X#
J10.3	X#	X#	X#	X#	X#	X#
J10.5	X#	X#	X#	X#	X#	X#
J10.6	X#	X#	X#	X#	X#	X#
J12.0	X#	XR	#R	X#	X#	X#

TABLE A.5-12. Message Minimum Implementation by Function for NonC² JUs (Sheet 6 of 6)

MSG MIN IMP	FUNCTIONS TO BE IMPLEMENTED					
	CONTROL					
	ATC	AIC	ASO	MSL/RPV	SAM UNIT CONT	EW
J12.1	XR	X#	X#	X#	X#	X#
J12.2	XR11	X#	XR11	XR11	X#	X#
J12.3	##	##	#R	XR12	X#	##
J12.4	TR	TR	TR	#R	##	##
J12.5	X#	XR	XR	X#	X#	X#
J12.6	X#	TR	TR	X#	##	##
J12.7	X#	##	##	X#	##	##
J13.0	X#	X#	TBD	X#	X#	X#
J13.2	T#	T#	T#	##	X#	T9R9
J13.3	X#	X#	X#	X#	T9#	T9R9
J13.4	X#	X#	X#	X#	T9#	T9R9
J13.5	X#	X#	X#	X#	T9#	T9R9
J14.0	X#	##	##	##	##	T#
J14.2	##	##	##	##	##	TR
J15.0	##	##	##	##	##	##
J17.0	##	##	##	##	##	##

APPENDIX A

A.5.6.1 LINK 16 WORD MINIMUM IMPLEMENTATION

Link 16 word MIN IMP can be determined after a system has specified its:

- a. Functional MIN IMP, i.e., the System Information and Network Management function and the PPLI function.
- b. Functional system implementation as described in Appendix D.
- c. Participation on the Link 16 Interface as a C² JU or a nonC² JU.
- d. Related function MIN IMP.
- e. Message MIN IMP.
- f. System implementation of messages (refer to Appendix D), i.e., the additional message implementation requirements defined by the system that are over and above message MIN IMP.

To determine a system's word MIN IMP requirements, turn to the table(s) for the appropriate message number. Under the word level heading, find the list of words contained in the message being examined. Proceed to the right for the MIN IMP symbols (defined in Table A.5-1) corresponding to the word number; the transmit symbols specify the implementation requirements when the message is implemented for transmission, and the receive symbols specify the requirements when the message is implemented for reception. Two columns of symbols are presented where separate word MIN IMP requirements must be defined for C² JUs and nonC² JUs.

Normally, only the criteria above need to be specified in order to determine a system's word MIN IMP. However, special cases exist in this appendix in which both data item MIN IMP and data item system implementation for a particular data element must be used to determine word MIN IMP for a message. This occurs when a data element contains action values that change the purpose or use of a message. The word MIN IMP varies with the values (data items) of the action field (data element). Individual instructions are

APPENDIX A

provided for interpreting the word, data element, and data item MIN IMP when this condition exists.

A.5.6.2 LINK 16 DATA ELEMENT MINIMUM IMPLEMENTATION

To determine data element MIN IMP, the procedures in paragraph A.5.7.1 must first be followed to determine word MIN IMP; additionally, Appendix D must be referenced to determine what additional words must be implemented. With a combined list containing word MIN IMP and word system implementation, turn to the table(s) for the appropriate message number. Under the data element level heading and the word number subheading is the list of data elements for that word. Proceed to the right for the MIN IMP symbols (defined in Table A.5-1) for each data element; the transmit symbols specify the implementation requirements when the word is implemented for transmission, and the receive symbols specify the requirements when the word is implemented for reception. Two columns of symbols are presented where separate data element MIN IMP requirements must be defined for C² JUs and nonC² JUs.

A.5.6.3 LINK 16 DATA ITEM MINIMUM IMPLEMENTATION

Normally, when a data element is required to meet MIN IMP requirements, only one data item other than the "no statement" value is required to satisfy MIN IMP requirements. Data item MIN IMP is only specified if additional data items exist that are mandatory within a data element. When this condition exists, MIN IMP is specified for each either as mandatory or nonmandatory.

To determine the data item MIN IMP, the procedures in paragraphs A.5.7.1 and A.5.7.2 must first be followed to determine the requirements for the MIN IMP hierarchy down through the data element level. Then Appendix D must be referenced to determine data element system implementation, i.e., the additional data element implementation requirements defined by the system that are over and above data element MIN IMP. With a combined list containing data element MIN IMP and data element system implementation, turn to the table(s) for the appropriate message number. If data item MIN IMP is not specified for any given data element, it can be assumed that only one data item other than the "no statement" value is required to satisfy MIN IMP requirements. Where data item MIN IMP is specified, it is possible to have

APPENDIX A

two columns of symbols, one for C² JUs data item MIN IMP and one for nonC² JU data item MIN IMP (which may be represented on the tables by the acronym NC² JU).

A.5.7 MESSAGE AND PURPOSE

Table A.5-15 Link 16 Message and Purpose Listing provides a listing of all Link 16 messages and purposes for use as references when examining minimum implementation.

TABLE A.5-15. Link 16 Message and Purpose Listing (Sheet 1 of 13)

<u>MESSAGE NUMBER</u>	<u>MESSAGE TITLE</u>	<u>PURPOSE</u>
J0.0	Initial Entry Message	The J0.0 Initial Entry message provides the data elements, in a known time slot, required for network entry.
J0.1	Test Message	The J0.1 Test message is used for terminal test and performance evaluation.
J0.2	Network Time Update Message	The J0.2 Network Time Update message adjusts the system time to a standard time.
J0.3	Time Slot Assignment Message	The J0.3 Time Slot Assignment message is used to permit dynamic assignment of time slots to JUs by a responsible JU.
J0.4	Radio Relay Control Message	The J0.4 Radio Relay Control message provides the means for the JU responsible for relay control to assign and deassign the paired slot radio relay function to a JTIDS/MIDS terminal and to control the relay function parameters.
J0.5	Repromulgation Relay Message	The J0.5 Repromulgation Relay message is used to request that those messages in the same time slot containing the J0.5 message be relayed by all JUs receiving the message.
J0.6	Communications Control Message	The J0.6 Communications Control message shall be used to initiate or terminate specific transmissions, to control communications and to request network management actions.
J0.7	Time Slot Reallocation Message	The J0.7 Time Slot Reallocation message provides the capability for a JU to request a percentage of time slots from a shared pool and disseminate the requests of other JUs.

TABLE A.5-15. Link 16 Message and Purpose Listing (Sheet 2 of 13)

<u>MESSAGE NUMBER</u>	<u>MESSAGE TITLE</u>	<u>PURPOSE</u>
J1.0	Connectivity Interrogation Message	The J1.0 Connectivity Interrogation message is used to solicit direct or indirect connectivity of the addressed JUs to support route establishment.
J1.1	Connectivity Status Message	The J1.1 Connectivity Status message is used to disseminate direct or multilevel connectivity of the source JUs.
J1.2	Route Establishment Message	The J1.2 Route Establishment message is used to establish a route for relay/destination control.
J1.3	Acknowledgement Message	The J1.3 Acknowledgement message is used by a JU involved in ground-to-ground communications to respond to messages which require machine receipt/compliance.
J1.4	Communicant Status Message	The J1.4 Communicant Status message is used by JUs to report the connectivity quality of its direct communicants to other direct communicants and to the designated Net Control Station.
J1.5	Net Control Initialization Message	The J1.5 Net Control Initialization message is used to provide a number of initial terminal parameters required to allow a terminal to actively participate in an established net under the control of a dynamic net manager.
J1.6	Needline Participation Group Assignment Message	The J1.6 Needline Participation Group Assignment message is used by the designated NCS to assign an addressed JU its associated destination Source TNs with PG numbers to form Needline PGs.

A-45

APPENDIX A

MIL-STD-6016B

TABLE A.5-15. Link 16 Message and Purpose Listing (Sheet 3 of 13)

<u>MESSAGE NUMBER</u>	<u>MESSAGE TITLE</u>	<u>PURPOSE</u>
J2.0	Indirect Interface Unit PPLI Message	The J2.0 Indirect Interface Unit PPLI message is used to provide Participating Unit/Reporting Unit information on the Link 16 network when network participation status, identification, and positional information is forwarded from Link 11/11B links.
J2.2	Air PPLI Message	The J2.2 Air PPLI message is used to provide all JUs information about airborne JUs on the Link 16 network. It is used by airborne JUs to provide network participation status, identification, positional information and relative navigation information.
J2.3	Surface (Maritime) PPLI Message	The J2.3 Surface (Maritime) PPLI message is used to provide all JUs information about surface (maritime) JUs on the Link 16 network. It is used by surface (maritime) JUs to provide network participation status, identification, positional information, and relative navigation information.
J2.4	Subsurface (Maritime) PPLI Message	The J2.4 Subsurface (Maritime) PPLI message is used to provide all JUs information about subsurface (maritime) JUs on the Link 16 network. It is used by subsurface (maritime) JUs to provide network participation status, identification, positional information, and relative navigation information.
J2.5	Land (Ground) Point PPLI Message	The J2.5 Land (Ground) Point PPLI message is used to provide all JUs information about stationary ground JUs on the Link 16 network. It is used by stationary ground JUs to provide network participation status, identification, positional information and relative navigation information.

TABLE A.5-15. Link 16 Message and Purpose Listing (Sheet 4 of 13)

<u>MESSAGE NUMBER</u>	<u>MESSAGE TITLE</u>	<u>PURPOSE</u>
J2.6	Land (Ground) Track PPLI Message	The J2.6 Land (Ground) Track PPLI message is used to provide all JUs information about mobile ground JUs on the Link 16 network. It is used by mobile ground JUs to provide network participation status, identification, positional information, and relative navigation information.
J3.0	Reference Point Message	The J3.0 Reference Point message is used to exchange tactical information about geographic references.
J3.1	Emergency Point Message	The J3.1 Emergency Point message is used to provide the location and type of an emergency that requires search and rescue.
J3.2	Air Track Message	The J3.2 Air Track message is used to exchange information on air tracks.
J3.3	Surface (Maritime) Track Message	The J3.3 Surface (Maritime) Track message is used to exchange information on surface (maritime) tracks.
J3.4	Subsurface (Maritime) Track Message	The J3.4 Subsurface (Maritime) Track Message is used to exchange information on subsurface (maritime) tracks and DATUMs.
J3.5	Land (Ground) Point/ Track Message	The J3.5 Land (Ground) Point/track Message is used to exchange tactical surveillance information on land (ground) points and tracks.
J3.6	Space Track Message	The J3.6 Space Track message is used to exchange information on Space and Ballistic Missile tracks.

A-47

APPENDIX A

MIL-STD-6016B

TABLE A.5-15. Link 16 Message and Purpose Listing (Sheet 5 of 13)

<u>MESSAGE NUMBER</u>	<u>MESSAGE TITLE</u>	<u>PURPOSE</u>
J3.7	Electronic Warfare Product Information Message	The J3.7 Electronic Warfare Product Information message provides the means to exchange tactically significant information that has been derived from electromagnetic sources.
J5.4	Acoustic Bearing/Range Message	The J5.4 Acoustic Bearing/Range Message is used to report acoustic bearing and range of subsurface (maritime) contacts.
J6.0	Amplification Message	The J6.0 Amplification message is used to exchange amplifying information, to include threat information, within the interface.
J7.0	Track Management Message	The J7.0 Track Management Message is used to transmit information necessary to effect management actions on tracks being reported within the interface. Management actions include dropping tracks, reporting environment/category and identity conflicts, changing environment/category and identity, changing alert status, and changing strength.
J7.1	Data Update Request Message	The J7.1 Data Update Request Message is used to request tactical information that has been locally generated by units participating within the interface.
J7.2	Correlation Message	The J7.2 Correlation Message is used to resolve a dual designation problem by identifying one track to be retained and another to be dropped.
J7.3	Pointer	The J7.3 Pointer Message is used to transmit a geographic position to an addressed unit within the interface.

A-48

APPENDIX A

MIL-STD-6016B

TABLE A.5-15. Link 16 Message and Purpose Listing (Sheet 6 of 13)

<u>MESSAGE NUMBER</u>	<u>MESSAGE TITLE</u>	<u>PURPOSE</u>
J7.4	Track Identifier Message	The J7.4 Track Identifier Message is used to transmit special identification numbers associated with the reference TN.
J7.5	IFF/SIF Management Message	The J7.5 IFF/SIF Management Message is used to transmit IFF/SIF information or a special code on a referenced track. Provisions are available to obtain the most current information by exchanging, clearing, or updating IFF/SIF data between units within the interface.
J7.6	Filter Management	The J7.6 Filter Management Message is used to report filter definitions, filter descriptions, and filter deletions. Filter definition reports describe the filter parameters requested to be implemented. Filter description reports indicate the filter parameters currently implemented by a system. Filter delete reports are requests to cancel currently implemented filters.
J7.7	Association Message	The J7.7 Association Message is used to transmit information, on two or more TNs, that has been automatically or manually associated when the information is deemed to pertain to the same contact. When a determination is made that the above relationship no longer exists, there is a provision for terminating this information association.
J8.0	Unit Designator Message	The J8.0 Unit Designator message is used to transmit to a terminal (from its NCS) the unit designator associated with the TNs in the terminal's Participation Group assignments. The message will also be used to inform an NCS of a terminal's unit designator.

TABLE A.5-15. Link 16 Message and Purpose Listing (Sheet 7 of 13)

<u>MESSAGE NUMBER</u>	<u>MESSAGE TITLE</u>	<u>PURPOSE</u>
J8.1	Mission Correlator Change Message	The J8.1 Mission Correlator Change message is used to add, delete, or change the mission correlator on a specific aircraft or flight of aircraft.
J9.0	Command Message	The J9.0 Command Message provides the means to transmit threat warning conditions, alert states, and weapons condition orders, to direct weapon system engagement for air defense/air support, and to direct antisubmarine warfare (ASW) operations.
J9.1	Engagement Coordination Message	The J9.1 Engagement Coordination message provides the means for two or more elements to coordinate engagements in order to conduct more efficient engagements and to reduce the probability of wasted resources.
J10.2	Engagement Status Message	The J10.2 Engagement Status Message provides the status of an engagement between the Reference TN and the Target TN.
J10.3	Handover Message	The J10.3 Handover Message is used to transfer control of aircraft and Remotely Piloted Vehicles/Missiles between controlling units.
J10.5	Controlling Unit Report Message	The J10.5 Controlling Unit Report Message is used to identify the JU that is controlling the track and to provide the mission correlator and/or voice call sign if applicable.
J10.6	Pairing Message	The J10.6 Pairing Message provides a means to indicate a pairing (not engagement status) between a friendly track and another track or point.

TABLE A.5-15. Link 16 Message and Purpose Listing (Sheet 8 of 13)

<u>MESSAGE NUMBER</u>	<u>MESSAGE TITLE</u>	<u>PURPOSE</u>
J12.0	Mission Assignment Message	The J12.0 Mission Assignment Message is used by C ² JUs to assign missions, designate targets, and provide target information to nonC ² JU platforms. Provision is made for the nonC ² JU platforms to acknowledge the message through receipt/compliance action.
J12.1	Vector Message	The J12.1 Vector Message is used by C ² JUs to send vector information and vector discretetes specifically to air units operating on its net. Vectors are given for interception of air targets, navigation, and air traffic control.
J12.2	Precision Aircraft Direction Message	The J12.2 Precision Aircraft Direction Message is used by controlling units for operations requiring precise control positioning of mission aircraft (for example, ground directed release of ordnance, automatic carrier landing operations, air cargo delivery, and Remotely Piloted Vehicle operations).
J12.3	Flight Path Message	The J12.3 Flight Path Message is used by controlling units to provide air units with multiple-leg flight path information.
J12.4	Controlling Unit Change Message	The J12.4 Controlling Unit Change Message is used to provide new control agency information to an aircraft prior to handoff to the new control agency. It is also used by a tactical aircraft to initiate control procedures with a new controlling unit or to effect a change of controlling unit in response to a controlling unit change order or by a C ² JU to initiate control by own unit.

TABLE A.5-15. Link 16 Message and Purpose Listing (Sheet 9 of 13)

<u>MESSAGE NUMBER</u>	<u>MESSAGE TITLE</u>	<u>PURPOSE</u>
J12.5	Target/Track Correlation Message	The J12.5 Target/Track Correlation Message is used by controlling C ² JUs to (a) correlate a target and a track, (b) decorrelate a target and a track, and (c) correlate multiple targets with a track.
J12.6	Target Sorting Message	The J12.6 Target Sorting message is used to (a) enable nonC ² JUs to exchange targets and targeting information among themselves, (b) pass sensor data to C ² JUs and among nonC ² JUs, (c) pass nonC ² JU engagement status information between nonC ² JUs and from nonC ² JUs to C ² JUs, and (d) provide control among nonC ² JUs.
J12.7	Target Bearing Message	The J12.7 Target Bearing message is used by nonC ² JUs to exchange target reports using polar coordinates and may include range, bearing, elevation, rate and uncertainty data.
J13.0	Airfield Status Message	The J13.0 Airfield Status message is used to report operational status of airfields, runways, airfield facilities, and aircraft carrier flight decks.
J13.2	Air Platform and System Status Message	The J13.2 Air Platform and System Status Message provides the current status of an air platform to include ordnance load, fuel, operational status, and on board systems' status.
J13.3	Surface (Maritime) Platform and System Status Message	The J13.3 Surface (Maritime) Platform and System Status Message provides the current status of a surface (maritime) platform to include ordnance load, operational status, and on board systems' status.

TABLE A.5-15. Link 16 Message and Purpose Listing (Sheet 10 of 13)

<u>MESSAGE NUMBER</u>	<u>MESSAGE TITLE</u>	<u>PURPOSE</u>
J13.4	Subsurface (Maritime) Platform and System Status Message	The J13.4 Subsurface (Maritime) Platform and System Status message provides the current status of a subsurface (maritime) platform to include operational status and on board systems' status.
J13.5	Land (Ground) Platform and System Status Message	The J13.5 Land (Ground) Platform and System Status Message provides the current operational weapons and equipment status of a land (ground) platform.
J14.0	Parametric Information Message	The J14.0 Parametric Information message provides the means to exchange parametric information that has been derived from electromagnetic sources.
J14.2	Electronic Warfare Control/Coordination Message	The J14.2 Electronic Warfare Control/Coordination message provides the means for EW participants to coordinate EW activities among one another.
J15.0	Threat Warning Message	The J15.0 Threat Warning Message provides the capability for threat warning to targeted friendly platforms to include threat type, threat posture, position/relative position, altitude, and speed.
J17.0	Weather Over Target Message	The J17.0 Weather Over Target message provides the current weather conditions over a target area.
J28.0	U.S. National 1 (Army)	The J28.0 U.S. National 1 (Army) message purpose is specified in the appropriate U.S. Army documentation.
J28.1	U.S. National 2 (Navy)	The J28.1 U.S. National 2 (Navy) message purpose is specified in the appropriate U.S. Navy documentation.

TABLE A.5-15. Link 16 Message and Purpose Listing (Sheet 11 of 13)

<u>MESSAGE NUMBER</u>	<u>MESSAGE TITLE</u>	<u>PURPOSE</u>
J28.2	U.S. National 3 (Air Force)	The J28.2 U.S. National 3 (Air Force) message purpose is specified in the appropriate U.S. Air Force documentation.
J28.20	Text Message	The J28.20 Text message provides the means to convey alphanumeric text information via datalink.
J28.3	U.S. National 4 (Marine Corps)	The J28.3 U.S. National 4 (Marine Corps) message purpose is specified in the appropriate U.S. Marine Corps documentation.
J28.4	FR National 1	The J28.4 FR National 1 message purpose is specified in the appropriate French documentation.
J28.5	FR National 2	The J28.5 FR National 2 message purpose is specified in the appropriate French documentation.
J28.6	U.S. National 5 (NSA)	The J28.6 U.S. National 5 (NSA) message purpose is specified in the appropriate NSA documentation.
J28.7	UK National 1	The J28.7 U.K. National 1 message purpose is specified in the appropriate U.K. documentation.
J29.1	UK National 2	The J29.1 U.K. National 2 message purpose is specified in the appropriate U.K. documentation.
J29.3	SP National 1 Message	The J29.3 SP National 1 message purpose is specified in the appropriate SP documentation.
J29.4	SP National 2 Message	The J29.4 SP National 2 message purpose is specified in the appropriate SP documentation.

TABLE A.5-15. Link 16 Message and Purpose Listing (Sheet 12 of 13)

<u>MESSAGE NUMBER</u>	<u>MESSAGE TITLE</u>	<u>PURPOSE</u>
J29.5	CA National Message	The J29.5 CA National message purpose is specified in the appropriate CA documentation.
J29.7	AU National Message	The J29.7 AU National message purpose is specified in the appropriate AU documentation.
J30.0	GE National 1 Message	The J30.0 GE National 1 message purpose is specified in the appropriate German documentation.
J30.1	GE National 2 Message	The J30.1 GE National 2 message purpose is specified in the appropriate German documentation.
J30.2	IT National 1 Message	The J30.2 IT National 1 message purpose is specified in the appropriate IT documentation.
J30.3	IT National 2 Message	The J30.3 IT National 2 message purpose is specified in the appropriate IT documentation.
J30.4	IT National 3 Message	The J30.4 IT National 3 message purpose is specified in the appropriate IT documentation.
J30.5	FR National 3 (Army) Message	The J30.5 FR National 3 message purpose is specified in the appropriate French documentation.
J30.6	FR National 4 (Air Force) Message	The J30.6 FR National 4 message purpose is specified in the appropriate French documentation.
J30.7	FR National 5 (Navy) Message	The J30.7 FR National 5 message purpose is specified in the appropriate French documentation.

TABLE A.5-15. Link 16 Message and Purpose Listing (Sheet 13 of 13)

<u>MESSAGE NUMBER</u>	<u>MESSAGE TITLE</u>	<u>PURPOSE</u>
J31.0	Over-the-Air Rekeying Management Message	The J31.0 Over-the-air Rekeying Management Message is used to exchange cryptonet management information for rekeying the KGV-8.
J31.1	Over-the-Air Rekeying Message	The J31.1 Over-the-air Rekeying Message is used to transmit the new cryptovariables.
J31.7	No Statement Message	The J31.7 No Statement Message is used to fill out the remainder of a transmission opportunity when the messages to be transmitted do not require the full number of Reed-Solomon code words.
RTT-A	RTT Interrogation- Addressed Message	The RTT Interrogation-Addressed message provides the means for a JTIDS/MIDS terminal to synchronize with system time using the active synchronization procedure. A specific terminal is interrogated and responds with the RTT Reply.
RTT-B	RTT Interrogation- Broadcast Message	The RTT Interrogation-Broadcast message provides the means for a JTIDS/MIDS terminal to synchronize with system time using the active synchronization procedure. The RTT-B is not addressed to any particular terminal. Any terminal that meets the specified requirement for time quality level responds with the RTT Reply.
RTT-REP	RTT Reply Message	The RTT Reply message provides the means for a JTIDS/MIDS terminal to support the active synchronization procedure by providing time-of-arrival data in response to either an RTT-A or RTT-B Interrogation.

APPENDIX A

TABLE A.5-J0.0. Word, Data Element, and Data Item Minimum Implementation
(Sheet 1 of 2)

WORD LEVEL

<u>WORD</u>	<u>MIN IMP</u>
J0.0I	TR
J0.0E0	TR
J0.0C1	##

DATA ELEMENT LEVEL

<u>J0.0I</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
RTT REPLY STATUS INDICATOR	TR
SLOT ASSIGN INDEX NUMBER	TR
TIME QUALITY	TR
RECURRENCE RATE, VOICE A	TR
TIME SLOT SET, VOICE A	TR
TIME SLOT NUMBER, VOICE A	TR
OFFSET, VOICE B	TR
RECURRENCE RATE, RTT-B	TR
TIME SLOT SET, RTT-B	TR
TIME SLOT NUMBER, RTT-B	TR
ACCESS RATE, RTT-B	TR
ACCESS RATE, PPLI B	TR

<u>J0.0E0</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
RECURRENCE RATE, PPLI A	TR
TIME SLOT SET, PPLI A	TR
TIME SLOT NUMBER, PPLI A	TR
RELAY DELAY, PPLI A	TR
RECURRENCE RATE, PPLI B 1	TR
TIME SLOT SET, PPLI B 1	TR
TIME SLOT NUMBER, PPLI B 1	TR
RECURRENCE RATE, PPLI B 2	TR
TIME SLOT SET, PPLI B 2	TR
TIME SLOT NUMBER, PPLI B 2	TR
RECURRENCE RATE, CONTROL	TR
TIME SLOT SET, CONTROL	TR
TIME SLOT NUMBER, CONTROL	TR
RELAY DELAY, CONTROL	TR
ACCESS RATE, PPLI A	TR

MIL-STD-6016B

APPENDIX A

TABLE A.5-J0.0. Word, Data Element, and Data Item Minimum Implementation
(Sheet 2 of 2)

DATA ELEMENT LEVEL (continued)

<u>J0.0C1</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
TIME SLOT SET, CURRENT	TR
TIME SLOT NUMBER, CURRENT	TR
EPOCH COUNT CURRENT	TR

MIL-STD-6016B

APPENDIX A

TABLE A.5-J0.1. Word, Data Element, and Data Item Minimum Implementation

WORD LEVEL

<u>WORD</u>	<u>MIN IMP</u>
J0.1I	TR
J0.1E0	TR
J0.1C21	TR

DATA ELEMENT LEVEL

<u>J0.1I</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
SPARE	TR
<u>J0.1E0</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
TEST PATTERN	TR
<u>J0.1C21</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
TEST PATTERN, 1	TR

MIL-STD-6016B

APPENDIX A

TABLE A.5-J0.2. Word, Data Element, and Data Item Minimum Implementation

WORD LEVEL

<u>WORD</u>	<u>MIN IMP</u>
J0.2I	TR

DATA ELEMENT LEVEL

<u>J0.2I</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
EPOCH NUMBER, EXECUTION	TR
EPOCH SUBDIVISION, EXECUTION	TR
EPOCH NUMBER, DELTA CHANGE	TR
TIME SLOT NUMBER, NEW	TR
TIME SLOT SET, NEW	TR

MIL-STD-6016B

APPENDIX A

TABLE A.5-J0.3. Word, Data Element, and Data Item Minimum Implementation
(Sheet 1 of 2)

WORD LEVEL

<u>WORD</u>	<u>MIN IMP</u>
J0.3I	TR
J0.3E0	TR
J0.3C1	TR
J0.3C2	##

DATA ELEMENT LEVEL

<u>J0.3I</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
TRACK NUMBER, ADDRESSEE	TR
DELTA EPOCH	TR
EPOCH SUBDIVISION	TR
ACTION CODE, TIME SLOT ASSIGNMENT	TR
PARTICIPATION GROUP	TR
RECEIPT/COMPLIANCE	TR
RECURRENCE RATE, RECEIPT/COMPLIANCE	TR

<u>J0.3E0</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
PARTICIPATION GROUP	TR
ACCESS DESCRIPTION	TR
RECURRENCE RATE	TR
TIME SLOT SET	TR
TIME SLOT NUMBER, INDEX	TR
TIME SLOT ASSIGNMENT ACTION	TR
TIME SLOT ASSIGNMENT TYPE	TR
TIME SLOT ASSIGNMENT QUALIFIER	TR
NET NUMBER, SPECIFIED	TR
CRYPTOVARIABLE LOGICAL LABEL NUMBER ONE	TR
CRYPTOMODE INDICATOR	TR
CRYPTOVARIABLE LOGICAL LABEL NUMBER TWO	TR
RELAY DELAY, RECEIVE 1	TR

<u>J0.3C1</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
NET NUMBER, DECRYPTION	TR
NET NUMBER, RELAY	TR

APPENDIX A

TABLE A.5-J0.3. Word, Data Element, and Data Item Minimum Implementation
(Sheet 2 of 2)

DATA ELEMENT LEVEL (continued)

<u>J0.3C2</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
INDEX NUMBER, SET	TR
ACTION CODE	TR
INDEX NUMBER, NEW SET	TR

APPENDIX A

TABLE A.5-J0.4. Word, Data Element, and Data Item Minimum Implementation
(Sheet 1 of 2)

WORD LEVEL

<u>WORD</u>	<u>MIN IMP</u>
J0.4I	TR
J0.4E0	TR
J0.4C1	TR
J0.4C2	##

DATA ELEMENT LEVEL

<u>J0.4I</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
TRACK NUMBER, ADDRESSEE	TR
DELTA EPOCH	TR
EPOCH SUBDIVISION	TR
RELAY CONTROL ACTION	TR
RELAY FUNCTION	TR
PARTICIPATION GROUP	TR
VOICE GROUP	TR
RELAY LABEL, DIRECTED	TR
ZOOM RELAY TRANSMIT NET	TR
RECEIPT/COMPLIANCE	TR
RECURRENCE RATE, RECEIPT/COMPLIANCE	TR

<u>J0.4E0</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
RELAY DELAY	TR
PARTICIPATION GROUP RELAY ASSIGNMENT INDICATOR	TR
RELAY CONTROL ACTION	TR
RECURRENCE RATE	TR
TIME SLOT SET	TR
TIME SLOT NUMBER, INDEX	TR
NET NUMBER, RECEIVE	TR
NET NUMBER, TRANSMIT	TR
CRYPTOVARIABLE LOGICAL LABEL NUMBER ONE, RELAY	TR
CRYPTOMODE INDICATOR, RELAY	TR
CRYPTOVARIABLE LOGICAL LABEL NUMBER TWO, RELAY	TR
PARTICIPATION GROUP	TR
RELAY FUNCTION	TR
VOICE GROUP	TR
RELAY LABEL, DIRECTED	TR

APPENDIX A

TABLE A.5-J0.4. Word, Data Element, and Data Item Minimum Implementation
(Sheet 2 of 2)

DATA ELEMENT LEVEL (continued)

<u>J0.4C1</u>	
<u>DATA ELEMENT</u>	<u>MIN IMP</u>
NET NUMBER, ORIGINAL NET	TR
RELAY DELAY, RECEIVE 2	TR

<u>J0.4C2</u>	
<u>DATA ELEMENT</u>	<u>MIN IMP</u>
RRIP, ROUTE 1	TR
RRIP, ROUTE 2	TR
RRIP, ROUTE 3	TR
RRIP, ROUTE 4	TR
RRIP, ROUTE 5	TR
RRIP, ROUTE 6	TR
RRIP, ROUTE 7	TR
RRIP, ROUTE 8	TR
RRIP, ROUTE 9	TR
RRIP, ROUTE 10	TR
RRIP, ROUTE 11	TR
RRIP, ROUTE 12	TR
RRIP, ROUTE 13	TR
RRIP, ROUTE 14	TR
RRIP, ROUTE 15	TR
IRIP, ROUTE 1	TR
IRIP, ROUTE 2	TR
IRIP, ROUTE 3	TR
IRIP, ROUTE 4	TR
IRIP, ROUTE 5	TR
IRIP, ROUTE 6	TR
IRIP, ROUTE 7	TR
IRIP, ROUTE 8	TR
IRIP, ROUTE 9	TR
IRIP, ROUTE 10	TR
IRIP, ROUTE 11	TR
IRIP, ROUTE 12	TR
IRIP, ROUTE 13	TR
IRIP, ROUTE 14	TR
IRIP, ROUTE 15	TR

MIL-STD-6016B

APPENDIX A

TABLE A.5-J0.5. Word, Data Element, and Data Item Minimum Implementation

WORD LEVEL

<u>WORD</u>	<u>MIN IMP</u>
J0.5I	TR

DATA ELEMENT LEVEL

<u>J0.5I</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
RECURRENCE RATE INDICATOR	TR
REPMULGATION COUNTER	TR
REPMULGATION COUNTER, ORIGINAL VALUE	T17R
ROUTE NUMBER, 2	##

MIL-STD-6016B

APPENDIX A

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

APPENDIX A

TABLE A.5-J0.6. Word, Data Element, and Data Item Minimum Implementation
(Sheet 1 of 2)

WORD LEVEL

<u>WORD</u>	<u>MIN IMP</u>
J0.6I	TR
J0.6C1	T18R19
J0.6C2	T18R19
J0.6C3	T20R
J0.6C4	T20R

DATA ELEMENT LEVEL

<u>J0.6I</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
TRACK NUMBER, ADDRESSEE	TR
LABEL, J-SERIES REQUEST	TR
SUBLABEL, J-SERIES REQUEST	TR
ACTION, COMMUNICATION CONTROL	TR
PARTICIPATION GROUP	TR
TRANSMISSION TERMINATION DESIGNATOR	TR
RECEIPT/COMPLIANCE	TR
RECURRENCE RATE, RECEIPT/COMPLIANCE	TR

<u>J0.6C1</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
ACTION, TIME SLOT REQUEST	TR
PARTICIPATION GROUP, 1	TR
RECURRENCE RATE, 1	TR
DELTA EPOCH, 1	TR
PARTICIPATION GROUP, 2	TR
RECURRENCE RATE, 2	TR
DELTA EPOCH, 2	TR
PARTICIPATION GROUP, 3	TR
RECURRENCE RATE, 3	TR
DELTA EPOCH, 3	TR
PARTICIPATION GROUP, 4	TR
RECURRENCE RATE, 4	TR
DELTA EPOCH, 4	TR

<u>J0.6C2</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
NEEDLINE PARTICIPATION GROUP STATUS, 1	TR
NEEDLINE PARTICIPATION GROUP STATUS AMPLIFY, 1	TR
TEST DURATION COUNT, 1	TR
PARTICIPATION GROUP, 1	TR

APPENDIX A

TABLE A.5-J0.6. Word, Data Element, and Data Item Minimum Implementation
(Sheet 2 of 2)

DATA ELEMENT LEVEL (continued)

<u>J0.6C2 (continued)</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
NEEDLINE PARTICIPATION GROUP STATUS, 2	TR
NEEDLINE PARTICIPATION GROUP STATUS AMPLIFY, 2	TR
TEST DURATION COUNT, 2	TR
PARTICIPATION GROUP, 2	TR

<u>J0.6C3</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
ACTION CODE, CRYPTOVARIABLE	TR
PARTICIPATION GROUP	TR
NET NUMBER	TR
CRYPTOVARIABLE LOGICAL LABEL A, TRANSEC	TR
CRYPTOVARIABLE LOGICAL LABEL B, TRANSEC	TR
EFFECTIVE FROM MINUTE	TR
EFFECTIVE FROM HOUR	TR
CRYPTOVARIABLE LOGICAL LABEL C, MSEC	TR
CRYPTOVARIABLE LOGICAL LABEL D, MSEC	TR

<u>J0.6C4</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
ACTION CODE, CRYPTOVARIABLE	TR
CRYPTOVARIABLE LOGICAL LABEL, MSEC INITIALIZATION	TR
NET NUMBER, 1	TR
NET NUMBER, 2	TR
NET NUMBER, 3	TR
NET NUMBER, 4	TR
NET NUMBER, 5	TR
NET NUMBER, 6	TR
NET NUMBER, 7	TR

APPENDIX A

TABLE A.5-J0.7. Word, Data Element, and Data Item Minimum Implementation
(Sheet 1 of 2)

WORD LEVEL

<u>WORD</u>	<u>MIN IMP</u>
J0.7I	TR
J0.7E0	TR

DATA ELEMENT LEVEL

<u>J0.7I</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
REALLOCATION POOL NUMBER	TR
DISSEMINATION MODE INDICATOR, OWN	TR
TABLE POSITION NUMBER, OWN	TR
DEMAND, OWN	TR
RECEIVE COUNT, OWN	TR
DISSEMINATION MODE INDICATOR, A	TR
HOP COUNT, A	TR
TIME TAG, A	TR
DEMAND, A	TR
RECEIVE COUNT, A	TR
TRACK NUMBER, DEMAND ORIGINATOR A	TR
TABLE POSITION NUMBER, A	TR

<u>J0.7E0</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
DISSEMINATION MODE INDICATOR, WORD	TR
TABLE SEGMENT	TR
DEMAND, B	TR
RECEIVE COUNT, B	TR
HOP COUNT, B	TR
TIME TAG, B	TR
DEMAND, C	TR
RECEIVE COUNT, C	TR
HOP COUNT, C	TR
TIME TAG, C	TR
DEMAND, D	TR
RECEIVE COUNT, D	TR
HOP COUNT, D	TR
TIME TAG, D	TR
DEMAND, E	TR
RECEIVE COUNT, E	TR
HOP COUNT, E	TR
TIME TAG, E	TR
DEMAND, B	TR
HOP COUNT, B	TR
RECEIVE COUNT, B	TR
TRACK NUMBER, DEMAND ORIGINATOR B	TR

APPENDIX A

TABLE A.5-J0.7. Word, Data Element, and Data Item Minimum Implementation
(Sheet 2 of 2)

DATA ELEMENT LEVEL (continued)

<u>J0.7E0 (continued)</u>	
<u>DATA ELEMENT</u>	<u>MIN IMP</u>
TIME TAG, B	TR
DEMAND, C	TR
HOP COUNT, C	TR
RECEIVE COUNT, C	TR
TRACK NUMBER, DEMAND ORIGINATOR C	TR
TIME TAG, C	TR

MIL-STD-6016B

APPENDIX A

TABLE A.5-J1.0. Word, Data Element, and Data Item Minimum Implementation

WORD LEVEL

<u>WORD</u>	<u>MIN IMP</u>
J1.0I	TR
J1.0E0	TR

DATA ELEMENT LEVEL

<u>J1.0I</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
CONNECTIVITY INTERROGATION INSTRUCTION	TR
ROUTE NUMBER	TR
RECURRENCE RATE, RESPONSE	TR
RECURRENCE RATE, UPDATE	TR
TRACK NUMBER, JU 1	TR
TRACK NUMBER, JU 2	#R
TRACK NUMBER, JU 3	#R
<u>J1.0E0</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
TRACK NUMBER, JU 4	TR
TRACK NUMBER, JU 5	#R
TRACK NUMBER, JU 6	#R
TRACK NUMBER, JU 7	#R

MIL-STD-6016B

APPENDIX A

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

APPENDIX A

TABLE A.5-J1.1. Word, Data Element, and Data Item Minimum Implementation
(Sheet 1 of 3)

WORD LEVEL

<u>WORD</u>	<u>MIN IMP</u>
J1.1I	TR
J1.1E0	TR
J1.1C1	TR
J1.1C2	TR

DATA ELEMENT LEVEL

<u>J1.1I</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
CONNECTIVITY STATUS INSTRUCTION	TR
CONNECTIVITY STATUS LEVEL	TR
CONNECTIVITY QUALITY, 1	T21R21
CONNECTIVITY QUALITY, 2	##
CONNECTIVITY QUALITY, 3	##
TRACK NUMBER, JU 1	TR
TRACK NUMBER, JU 2	#R
TRACK NUMBER, JU 3	#R

<u>J1.1E0</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
CONNECTIVITY QUALITY, 4	TR
CONNECTIVITY QUALITY, 5	##
CONNECTIVITY QUALITY, 6	##
CONNECTIVITY QUALITY, 7	##
TRACK NUMBER, JU 4	TR
TRACK NUMBER, JU 5	#R
TRACK NUMBER, JU 6	#R
TRACK NUMBER, JU 7	#R
CONNECTIVITY QUALITY, 8	TR
CONNECTIVITY QUALITY, 9	##
CONNECTIVITY QUALITY, 10	##
CONNECTIVITY QUALITY, 11	##
TRACK NUMBER, JU 8	TR
TRACK NUMBER, JU 9	#R
TRACK NUMBER, JU 10	#R
TRACK NUMBER, JU 11	#R

<u>J1.1C1</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
CONNECTIVITY QUALITY, 8	TR
CONNECTIVITY QUALITY, 9	##
CONNECTIVITY QUALITY, 10	##
TRACK NUMBER, JU 8	TR

APPENDIX A

TABLE A.5-J1.1. Word, Data Element, and Data Item Minimum Implementation
(Sheet 2 of 3)

DATA ELEMENT LEVEL (continued)

<u>J1.1C1 (continued)</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
TRACK NUMBER, JU 9	#R
TRACK NUMBER, JU 10	#R
COMMUNITY DESIGNATOR	TR
RELAY LEVEL	TR

<u>J1.1C2</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 1	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 2	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 3	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 4	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 5	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 6	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 7	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 8	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 9	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 10	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 11	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 12	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 13	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 14	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 15	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 16	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 17	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 18	TR
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 19	##

APPENDIX A

TABLE A.5-J1.1. Word, Data Element, and Data Item Minimum Implementation
(Sheet 3 of 3)

DATA ELEMENT LEVEL (continued)

<u>J1.1C2 (continued)</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 20	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 21	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 22	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 23	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 24	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 25	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 26	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 27	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 28	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 29	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 30	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 31	##

MIL-STD-6016B

APPENDIX A

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

APPENDIX A

TABLE A.5-J1.2. Word, Data Element, and Data Item Minimum Implementation

WORD LEVEL

<u>WORD</u>	<u>MIN IMP</u>
J1.2I	TR
J1.2E0	TR
J1.2E1	TR

DATA ELEMENT LEVEL

<u>J1.2I</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
ACTION/INFORMATION INDICATOR, 4	TR
TRACK NUMBER, ORIGINATOR	TR
TRACK NUMBER, DESTINATION	TR
MINIMUM CONNECTIVITY QUALITY REQUESTED	TR
ALLOCATED PG INDEX NUMBER	TR
ROUTE NUMBER, RELAY	TR
MAXIMUM CONNECTIVITY QUALITY PROVIDED	TR

<u>J1.2E0</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
TRACK NUMBER, RELAY 1	TR
TRACK NUMBER, RELAY 2	TR
TRACK NUMBER, RELAY 3	TR
TRACK NUMBER, RELAY 4	TR

<u>J1.2E1</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
TRACK NUMBER, RELAY 5	TR
TRACK NUMBER, RELAY 6	TR
TRACK NUMBER, RELAY 7	TR

MIL-STD-6016B

APPENDIX A

THIS PAGE INTENTIONALLY LEFT BLANK

APPENDIX A

TABLE A.5-J1.3. Word, Data Element, and Data Item Minimum Implementation
(Sheet 1 of 3)

WORD LEVEL

<u>WORD</u>	<u>MIN IMP</u>
J1.3I	TR
J1.3E0	TR

DATA ELEMENT LEVEL

<u>J1.3I</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
ACKNOWLEDGEMENT DATA DESIGNATOR	TR
ACKNOWLEDGEMENT DATA AMPLIFIER	TR
TRACK NUMBER, JU	TR
BLOCK SIZE INDICATOR	TR
SEQUENTIAL BLOCK/FIELD FLAG, 1	TR
SEQUENTIAL BLOCK/FIELD FLAG, 2	##
SEQUENTIAL BLOCK/FIELD FLAG, 3	##
SEQUENTIAL BLOCK/FIELD FLAG, 4	##
SEQUENTIAL BLOCK/FIELD FLAG, 5	##
SEQUENTIAL BLOCK/FIELD FLAG, 6	##
SEQUENTIAL BLOCK/FIELD FLAG, 7	##
SEQUENTIAL BLOCK/FIELD FLAG, 8	##
SEQUENTIAL BLOCK/FIELD FLAG, 9	##
SEQUENTIAL BLOCK/FIELD FLAG, 10	##
SEQUENTIAL BLOCK/FIELD FLAG, 11	##
SEQUENTIAL BLOCK/FIELD FLAG, 12	##
SEQUENTIAL BLOCK/FIELD FLAG, 13	##
SEQUENTIAL BLOCK/FIELD FLAG, 14	##
SEQUENTIAL BLOCK/FIELD FLAG, 15	##
SEQUENTIAL BLOCK/FIELD FLAG, 16	##
SEQUENTIAL BLOCK/FIELD FLAG, 17	##
SEQUENTIAL BLOCK/FIELD FLAG, 18	##
SEQUENTIAL BLOCK/FIELD FLAG, 19	##
SEQUENTIAL BLOCK/FIELD FLAG, 20	##
SEQUENTIAL BLOCK/FIELD FLAG, 21	##
SEQUENTIAL BLOCK/FIELD FLAG, 22	##
SEQUENTIAL BLOCK/FIELD FLAG, 23	##
SEQUENTIAL BLOCK/FIELD FLAG, 24	##
SEQUENTIAL BLOCK/FIELD FLAG, 25	##
SEQUENTIAL BLOCK/FIELD FLAG, 26	##
SEQUENTIAL BLOCK/FIELD FLAG, 27	##
SEQUENTIAL BLOCK/FIELD FLAG, 28	##
SEQUENTIAL BLOCK/FIELD FLAG, 29	##
SEQUENTIAL BLOCK/FIELD FLAG, 30	##
SEQUENTIAL BLOCK/FIELD FLAG, 31	##
SEQUENTIAL BLOCK/FIELD FLAG, 32	##
SEQUENTIAL BLOCK/FIELD FLAG, 33	##
SEQUENTIAL BLOCK/FIELD FLAG, 34	##

APPENDIX A

TABLE A.5-J1.3. Word, Data Element, and Data Item Minimum Implementation
(Sheet 2 of 3)

DATA ELEMENT LEVEL (continued)

<u>J1.3I (continued)</u>		<u>MIN IMP</u>
<u>DATA ELEMENT</u>		
SEQUENTIAL BLOCK/FIELD FLAG, 35		##
SEQUENTIAL BLOCK/FIELD FLAG, 36		##
SEQUENTIAL BLOCK/FIELD FLAG, 37		##
SEQUENTIAL BLOCK/FIELD FLAG, 38		##
SEQUENTIAL BLOCK/FIELD FLAG, 39		##

<u>J1.3E0</u>		<u>MIN IMP</u>
<u>DATA ELEMENT</u>		
SEQUENTIAL BLOCK/FIELD FLAG, 40		TR
SEQUENTIAL BLOCK/FIELD FLAG, 41		##
SEQUENTIAL BLOCK/FIELD FLAG, 42		##
SEQUENTIAL BLOCK/FIELD FLAG, 43		##
SEQUENTIAL BLOCK/FIELD FLAG, 44		##
SEQUENTIAL BLOCK/FIELD FLAG, 45		##
SEQUENTIAL BLOCK/FIELD FLAG, 46		##
SEQUENTIAL BLOCK/FIELD FLAG, 47		##
SEQUENTIAL BLOCK/FIELD FLAG, 48		##
SEQUENTIAL BLOCK/FIELD FLAG, 49		##
SEQUENTIAL BLOCK/FIELD FLAG, 50		##
SEQUENTIAL BLOCK/FIELD FLAG, 51		##
SEQUENTIAL BLOCK/FIELD FLAG, 52		##
SEQUENTIAL BLOCK/FIELD FLAG, 53		##
SEQUENTIAL BLOCK/FIELD FLAG, 54		##
SEQUENTIAL BLOCK/FIELD FLAG, 55		##
SEQUENTIAL BLOCK/FIELD FLAG, 56		##
SEQUENTIAL BLOCK/FIELD FLAG, 57		##
SEQUENTIAL BLOCK/FIELD FLAG, 58		##
SEQUENTIAL BLOCK/FIELD FLAG, 59		##
SEQUENTIAL BLOCK/FIELD FLAG, 60		##
SEQUENTIAL BLOCK/FIELD FLAG, 61		##
SEQUENTIAL BLOCK/FIELD FLAG, 62		##
SEQUENTIAL BLOCK/FIELD FLAG, 63		##
SEQUENTIAL BLOCK/FIELD FLAG, 64		##
SEQUENTIAL BLOCK/FIELD FLAG, 65		##
SEQUENTIAL BLOCK/FIELD FLAG, 66		##
SEQUENTIAL BLOCK/FIELD FLAG, 67		##
SEQUENTIAL BLOCK/FIELD FLAG, 68		##
SEQUENTIAL BLOCK/FIELD FLAG, 69		##
SEQUENTIAL BLOCK/FIELD FLAG, 70		##
SEQUENTIAL BLOCK/FIELD FLAG, 71		##
SEQUENTIAL BLOCK/FIELD FLAG, 72		##
SEQUENTIAL BLOCK/FIELD FLAG, 73		##
SEQUENTIAL BLOCK/FIELD FLAG, 74		##
SEQUENTIAL BLOCK/FIELD FLAG, 75		##
SEQUENTIAL BLOCK/FIELD FLAG, 76		##

APPENDIX A

TABLE A.5-J1.3. Word, Data Element, and Data Item Minimum Implementation
(Sheet 3 of 3)

DATA ELEMENT LEVEL (continued)

<u>J1.3E0 (continued)</u>		<u>MIN IMP</u>
<u>DATA ELEMENT</u>		
SEQUENTIAL BLOCK/FIELD FLAG, 77		##
SEQUENTIAL BLOCK/FIELD FLAG, 78		##
SEQUENTIAL BLOCK/FIELD FLAG, 79		##
SEQUENTIAL BLOCK/FIELD FLAG, 80		##
SEQUENTIAL BLOCK/FIELD FLAG, 81		##
SEQUENTIAL BLOCK/FIELD FLAG, 82		##
SEQUENTIAL BLOCK/FIELD FLAG, 83		##
SEQUENTIAL BLOCK/FIELD FLAG, 84		##
SEQUENTIAL BLOCK/FIELD FLAG, 85		##
SEQUENTIAL BLOCK/FIELD FLAG, 86		##
SEQUENTIAL BLOCK/FIELD FLAG, 87		##
SEQUENTIAL BLOCK/FIELD FLAG, 88		##
SEQUENTIAL BLOCK/FIELD FLAG, 89		##
SEQUENTIAL BLOCK/FIELD FLAG, 90		##
SEQUENTIAL BLOCK/FIELD FLAG, 91		##
SEQUENTIAL BLOCK/FIELD FLAG, 92		##
SEQUENTIAL BLOCK/FIELD FLAG, 93		##
SEQUENTIAL BLOCK/FIELD FLAG, 94		##
SEQUENTIAL BLOCK/FIELD FLAG, 95		##
SEQUENTIAL BLOCK/FIELD FLAG, 96		##
SEQUENTIAL BLOCK/FIELD FLAG, 97		##
SEQUENTIAL BLOCK/FIELD FLAG, 98		##
SEQUENTIAL BLOCK/FIELD FLAG, 99		##
SEQUENTIAL BLOCK/FIELD FLAG, 100		##
SEQUENTIAL BLOCK/FIELD FLAG, 101		##
SEQUENTIAL BLOCK/FIELD FLAG, 102		##
SEQUENTIAL BLOCK/FIELD FLAG, 103		##
SEQUENTIAL BLOCK/FIELD FLAG, 104		##
SEQUENTIAL BLOCK/FIELD FLAG, 105		##
SEQUENTIAL BLOCK/FIELD FLAG, 106		##
SEQUENTIAL BLOCK/FIELD FLAG, 107		##

MIL-STD-6016B

APPENDIX A

THIS PAGE INTENTIONALLY LEFT BLANK

APPENDIX A

TABLE A.5-J1.4. Word, Data Element, and Data Item Minimum Implementation
(Sheet 1 of 7)

WORD LEVEL

<u>WORD</u>	<u>MIN IMP</u>
J1.4I	TR
J1.4E0	TR

DATA ELEMENT LEVEL

<u>J1.4I</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
MESSAGE RECEIVED INDICATOR	TR
NET CONTROL MESSAGE SEQUENCE NUMBER	TR
RECEIPT/COMPLIANCE	TR
COMMUNITY DESIGNATOR	TR
RELAY LEVEL, OWN NET CONTROL STATION	TR
OWN NET CONTROL STATION STATUS	TR
TIME SLOT OFFSET, CONTROL NET ENTRY	TR
NET NUMBER, CONTROL NET ENTRY	TR
CONNECTIVITY QUALITY, INTERCOMMUNITY COMMUNICANT	TR
TRACK NUMBER, INTERCOMMUNITY COMMUNICANT	TR
COMMUNITY DESIGNATOR, INTERCOMMUNITY COMMUNICANT	TR
RELAY LEVEL, INTERCOMMUNITY COMMUNICANT	TR

<u>J1.4E0</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
REPORT FORMAT INDICATOR	TR
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 1	TR
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 2	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 3	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 4	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 5	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 6	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 7	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 8	##

APPENDIX A

TABLE A.5-J1.4. Word, Data Element, and Data Item Minimum Implementation
(Sheet 2 of 7)

DATA ELEMENT LEVEL (continued)

<u>J1.4E0 (continued)</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 9	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 10	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 11	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 12	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 13	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 14	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 15	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 16	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 17	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 18	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 19	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 20	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 21	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 22	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 23	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 24	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 25	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 26	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 27	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 28	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 29	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 30	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 31	##

APPENDIX A

TABLE A.5-J1.4. Word, Data Element, and Data Item Minimum Implementation
(Sheet 3 of 7)

DATA ELEMENT LEVEL (continued)

<u>J1.4E0 (continued)</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 32	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 33	TR
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 34	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 35	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 36	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 37	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 38	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 39	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 40	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 41	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 42	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 43	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 44	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 45	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 46	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 47	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 48	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 49	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 50	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 51	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 52	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 53	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 54	##

APPENDIX A

TABLE A.5-J1.4. Word, Data Element, and Data Item Minimum Implementation
(Sheet 4 of 7)

DATA ELEMENT LEVEL (continued)

<u>J1.4E0 (continued)</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 55	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 56	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 57	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 58	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 59	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 60	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 61	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 62	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 63	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 64	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 65	TR
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 66	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 67	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 68	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 69	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 70	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 71	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 72	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 73	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 74	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 75	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 76	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 77	##

APPENDIX A

TABLE A.5-J1.4. Word, Data Element, and Data Item Minimum Implementation
(Sheet 5 of 7)

DATA ELEMENT LEVEL (continued)

<u>J1.4E0 (continued)</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 78	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 79	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 80	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 81	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 82	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 83	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 84	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 85	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 86	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 87	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 88	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 89	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 90	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 91	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 92	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 93	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 94	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 95	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 96	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 97	TR
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 98	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 99	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 100	##

APPENDIX A

TABLE A.5-J1.4. Word, Data Element, and Data Item Minimum Implementation
(Sheet 6 of 7)

DATA ELEMENT LEVEL (continued)

<u>J1.4E0 (continued)</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 101	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 102	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 103	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 104	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 105	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 106	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 107	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 108	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 109	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 110	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 111	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 112	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 113	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 114	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 115	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 116	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 117	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 118	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 119	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 120	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 121	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 122	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 123	##

APPENDIX A

TABLE A.5-J1.4. Word, Data Element, and Data Item Minimum Implementation
(Sheet 7 of 7)

DATA ELEMENT LEVEL (continued)

<u>J1.4E0 (continued)</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 124	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 125	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 126	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 127	##
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 128	##

MIL-STD-6016B

APPENDIX A

THIS PAGE INTENTIONALLY LEFT BLANK

APPENDIX A

TABLE A.5-J1.5. Word, Data Element, and Data Item Minimum Implementation
(Sheet 1 of 2)

WORD LEVEL

<u>WORD</u>	<u>MIN IMP</u>
J1.5I	T19R
J1.5E0	T19R
J1.5C1	T19R

DATA ELEMENT LEVEL

<u>J1.5I</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
TRACK NUMBER, ADDRESSEE	TR
NET NUMBER, DEFAULT	TR
REPROMULGATION RELAY STATE	TR
REPROMULGATION COUNTER	TR
CONNECTIVITY MONITOR, ENABLE	TR
COMMUNITY DESIGNATOR	TR
REPROMULGATION ORIGINATOR CONTROL	TR
INITIAL ENTRY INDICATOR	TR
TIMEOUT INTERVAL	TR
RECEIPT/COMPLIANCE	TR
RECURRENCE RATE, RECEIPT/COMPLIANCE	TR

<u>J1.5E0</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
RECURRENCE RATE, NET STATUS PARTICIPATION GROUP	TR
TIME SLOT SET, NET STATUS PARTICIPATION GROUP	TR
TIME SLOT NUMBER, NET STATUS PARTICIPATION GROUP	TR
NET NUMBER, NET STATUS PARTICIPATION GROUP	TR
OVERALL RECURRENCE RATE, NET STATUS PARTICIPATION GROUP	TR
RELAY LEVEL, OWN NET CONTROL STATION	TR
COMMUNICANT STATUS UPDATE INDICATOR	TR
TIME SLOT OFFSET, CONTROL NET ENTRY	TR
NET NUMBER, CONTROL NET ENTRY	TR
PARTICIPANT INDEX NUMBER	TR

APPENDIX A

TABLE A.5-J1.5. Word, Data Element, and Data Item Minimum Implementation
(Sheet 2 of 2)

DATA ELEMENT LEVEL (continued)

<u>J1.5C1</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
ADD/DELETE INDICATOR	TR
TRACK NUMBER, SECONDARY 1	TR
TRACK NUMBER, SECONDARY 2	##
TRACK NUMBER, SECONDARY 3	##
TRACK NUMBER, SECONDARY 4	##

APPENDIX A

TABLE A.5-J1.6. Word, Data Element, and Data Item Minimum Implementation

WORD LEVEL

<u>WORD</u>	<u>MIN IMP</u>
J1.6I	T19R
J1.6E0	T19R

DATA ELEMENT LEVEL

<u>J1.6I</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
TRACK NUMBER, ADDRESSEE	TR
PATH QUALITY MONITORING	TR
PATH QUALITY THRESHOLD, 1	TR
PATH QUALITY THRESHOLD, 2	TR
RECEIPT/COMPLIANCE	TR
RECURRENCE RATE, RECEIPT/COMPLIANCE	TR

<u>J1.6E0</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
PARTICIPATION GROUP, 1	TR
PARTICIPATION GROUP, 2	TR
RESPONSE TIME	TR
ASSIGN/DEASSIGN INDICATOR	TR
TRACK NUMBER, ADDRESSEE 1	TR
TRACK NUMBER, ADDRESSEE 2	##
TRACK NUMBER, ADDRESSEE 3	##
TRACK NUMBER, ADDRESSEE 4	TR
TRACK NUMBER, ADDRESSEE 5	##
TRACK NUMBER, ADDRESSEE 6	##

MIL-STD-6016B

APPENDIX A

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

APPENDIX A

TABLE A.5-J2.0. Word, Data Element, and Data Item Minimum Implementation

WORD LEVEL

<u>WORD</u>	<u>MIN IMP</u>
J2.0I	TR
J2.0E0	TR
J2.0C1	T#

DATA ELEMENT LEVEL

<u>J2.0I</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
EXERCISE INDICATOR	N22N22
FORCE TELL INDICATOR	TR
EMERGENCY INDICATOR	TR
COMMAND AND CONTROL INDICATOR	#22R
SIMULATION INDICATOR	#22R
ALTITUDE, 25 FT	#23#
SITE	T#
UNIT TYPE	##
ORIGINATOR ENVIRONMENT/CATEGORY	#22R

<u>J2.0E0</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
LATITUDE, 0.0103 MINUTE	TR
LONGITUDE, 0.0103 MINUTE	TR
COURSE	##
SPEED	##

<u>J2.0C1</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
MODE I CODE	TR
MODE II CODE	TR
MODE III CODE	TR

MIL-STD-6016B

APPENDIX A

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

APPENDIX A

TABLE A.5-J2.2. Word, Data Element, and Data Item Minimum Implementation
(Sheet 1 of 2)

WORD LEVEL

<u>WORD</u>	<u>MIN IMP</u>
J2.2I	TR
J2.2E0	TR
J2.2C1	T#
J2.2C2	T#
J2.2C3	##
J2.2C5	##

DATA ELEMENT LEVEL

<u>J2.2I</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
EXERCISE INDICATOR	#22R		#22R
MISSION COMMANDER INDICATOR	N22#		#22#
FORCE TELL INDICATOR	TR		T#
EMERGENCY INDICATOR	#22R		#22#
COMMAND AND CONTROL INDICATOR	TR		T#
SIMULATION INDICATOR	#22R		#22R
AIRBORNE INDICATOR	T#		T#
FLIGHT LEADER INDICATOR	T#		T#
ACTIVE RELAY INDICATOR, WIDE AREA NETWORK	TR		TR
RTT REPLY STATUS INDICATOR	TR		TR
NETWORK PARTICIPATION STATUS INDICATOR	TR		TR
TIME QUALITY	TR		TR
GEODETTIC POSITION QUALITY	TR		TR
STRENGTH	#R		T#
BAILOUT INDICATOR	##		##
ALTITUDE, 25 FT	TR		T#
NET NUMBER, NONC2 JU-TO-NONC2 JU NPG A	##		##
NONC2 JU-TO-NONC2 JU NPG STATUS A	##		##
ALTITUDE QUALITY	TR		TR

<u>J2.2E0</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
LATITUDE, 0.0013 MINUTE	TR		TR
LONGITUDE, 0.0013 MINUTE	TR		TR
COURSE	TR		T#
SPEED	TR		T#

MIL-STD-6016B

APPENDIX A

TABLE A.5-J2.2. Word, Data Element, and Data Item Minimum Implementation
(Sheet 2 of 2)

DATA ELEMENT LEVEL (continued)

<u>J2.2C1</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
MODE I CODE	##		##
MODE II CODE	##		##
MODE III CODE	##		##
AIR PLATFORM	T#		T#
AIR PLATFORM ACTIVITY	T#		T#

<u>J2.2C2</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
VOICE CALL SIGN INDICATOR	#22#		#22#
LINK 4A ADDRESS INDICATOR	#22#		#22#
VOICE CALL SIGN	#22#		#22#
LINK 4A ADDRESS	#22#		#22#
VOICE FREQUENCY/CHANNEL	T#		T#
CONTROL CHANNEL	T#		T#
ACTIVE RELAY INDICATOR, VOICE CHANNEL	T#		T#
ACTIVE RELAY INDICATOR, CONTROL CHANNEL	T#		T#
VOICE FREQUENCY/CHANNEL INDICATOR	T#		T#

<u>J2.2C3</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
U COORDINATE	TR		TR
V COORDINATE	TR		TR
BETA ANGLE	TR		TR
RELATIVE POSITION QUALITY	TR		TR
RELATIVE AZIMUTH QUALITY	TR		TR

<u>J2.2C5</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
NET NUMBER, NONC2 JU-T0-NONC2 JU NPG B	##		##
NONC2 JU-T0-NONC2 JU NPG STATUS B	##		##
MISSION CORRELATOR	##		##
WINGMAN IDENTIFICATION LETTER/NUMBER	##		##
TRACK NUMBER, MISSION COMMANDER	##		##
TRACK NUMBER, FLIGHT LEAD	#R		TR

MIL-STD-6016B

APPENDIX A

TABLE A.5-J2.3. Word, Data Element, and Data Item Minimum Implementation
(Sheet 1 of 2)

WORD LEVEL

<u>WORD</u>	<u>MIN IMP</u>
J2.3I	TR
J2.3E0	TR
J2.3C1	T#
J2.3C2	T#
J2.3C3	##

DATA ELEMENT LEVEL

<u>J2.3I</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
EXERCISE INDICATOR	#22R		#22R
FORCE TELL INDICATOR	TR		T#
EMERGENCY INDICATOR	#22R		#22#
COMMAND AND CONTROL INDICATOR	TR		T#
SIMULATION INDICATOR	#22R		#22R
ACTIVE RELAY INDICATOR, WIDE AREA NETWORK	TR		TR
RTT REPLY STATUS INDICATOR	TR		TR
NETWORK PARTICIPATION STATUS INDICATOR	TR		TR
TIME QUALITY	TR		TR
GEODETIC POSITION QUALITY	TR		TR
STRENGTH	##		##
ELEVATION, 25 FT	TR		TR
MISSION CORRELATOR	##		##
ELEVATION QUALITY	TR		TR

<u>J2.3E0</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
LATITUDE, 0.0013 MINUTE	TR		TR
LONGITUDE, 0.0013 MINUTE	TR		TR
COURSE	T#		T#
SPEED	T#		T#

<u>J2.3C1</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
MODE I CODE	##		##
MODE II CODE	##		##
MODE III CODE	##		##
SURFACE (MARITIME) PLATFORM	T#		T#
SURFACE (MARITIME) PLATFORM ACTIVITY	T#		T#

MIL-STD-6016B

APPENDIX A

TABLE A.5-J2.3. Word, Data Element, and Data Item Minimum Implementation
(Sheet 2 of 2)

DATA ELEMENT LEVEL (continued)

<u>J2.3C2</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
VOICE CALL SIGN INDICATOR	#22#		#22#
LINK 4A ADDRESS INDICATOR	#22#		#22#
VOICE CALL SIGN	#22#		#22#
LINK 4A ADDRESS	#22#		#22#
VOICE FREQUENCY/CHANNEL	T#		T#
CONTROL CHANNEL	T#		T#
ACTIVE RELAY INDICATOR, VOICE CHANNEL	T#		T#
ACTIVE RELAY INDICATOR, CONTROL CHANNEL	T#		T#
VOICE FREQUENCY/CHANNEL INDICATOR	T#		T#

<u>J2.3C3</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
U COORDINATE	TR		TR
V COORDINATE	TR		TR
BETA ANGLE	TR		TR
RELATIVE POSITION QUALITY	TR		TR
RELATIVE AZIMUTH QUALITY	TR		TR

MIL-STD-6016B

APPENDIX A

TABLE A.5-J2.4. Word, Data Element, and Data Item Minimum Implementation
(Sheet 1 of 2)

WORD LEVEL

<u>WORD</u>	<u>MIN IMP</u>
J2.4I	TR
J2.4E0	TR
J2.4C1	T#
J2.4C2	T#
J2.4C3	##
J2.4C4	##

DATA ELEMENT LEVEL

<u>J2.4I</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
EXERCISE INDICATOR	#22R		#22R
DISPLACED POSITION INDICATOR	#22#		#22#
FORCE TELL INDICATOR	TR		T#
EMERGENCY INDICATOR	#22R		#22#
COMMAND AND CONTROL INDICATOR	TR		T#
SIMULATION INDICATOR	#22R		#22R
ACTIVE RELAY INDICATOR, WIDE AREA NETWORK	TR		TR
RTT REPLY STATUS INDICATOR	TR		TR
NETWORK PARTICIPATION STATUS INDICATOR	TR		TR
TIME QUALITY	TR		TR
GEODETIC POSITION QUALITY	TR		TR
DEPTH, 15 METERS	T94R		T94R
DEPTH CATEGORY	T94R		T94R
MISSION CORRELATOR	##		##
DEPTH QUALITY	TR		TR

<u>J2.4E0</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
LATITUDE, 0.0013 MINUTE	TR		TR
LONGITUDE, 0.0013 MINUTE	TR		TR
COURSE	T#		T#
SPEED	T#		T#

<u>J2.4C1</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
MODE I CODE	##		##
MODE II CODE	##		##
MODE III CODE	##		##
SUBSURFACE (MARITIME) PLATFORM	T#		T#

MIL-STD-6016B

APPENDIX A

TABLE A.5-J2.4. Word, Data Element, and Data Item Minimum Implementation
(Sheet 2 of 2)

DATA ELEMENT LEVEL (continued)

<u>J2.4C1 (continued)</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
SUBSURFACE (MARITIME) PLATFORM ACTIVITY	T#		T#

<u>J2.4C2</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
VOICE CALL SIGN INDICATOR	#22#		#22#
LINK 4A ADDRESS INDICATOR	#22#		#22#
VOICE CALL SIGN	#22#		#22#
LINK 4A ADDRESS	#22#		#22#
VOICE FREQUENCY/CHANNEL	T#		T#
CONTROL CHANNEL	T#		T#
ACTIVE RELAY INDICATOR, VOICE CHANNEL	T#		T#
ACTIVE RELAY INDICATOR, CONTROL CHANNEL	T#		T#
VOICE FREQUENCY/CHANNEL INDICATOR	T#		T#

<u>J2.4C3</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
U COORDINATE	TR		TR
V COORDINATE	TR		TR
BETA ANGLE	TR		TR
RELATIVE POSITION QUALITY	TR		TR
RELATIVE AZIMUTH QUALITY	TR		TR

<u>J2.4C4</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
LATITUDE, 0.0103 MINUTE	TR		TR
LONGITUDE, 0.0103 MINUTE	TR		TR

MIL-STD-6016B

APPENDIX A

TABLE A.5-J2.5. Word, Data Element, and Data Item Minimum Implementation
(Sheet 1 of 2)

WORD LEVEL

<u>WORD</u>	<u>MIN IMP</u>
J2.5I	TR
J2.5E0	TR
J2.5C1	T#
J2.5C3	##
J2.5C4	##
J2.5C6	##

DATA ELEMENT LEVEL

<u>J2.5I</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
EXERCISE INDICATOR	#22R		#22R
DISPLACED POSITION INDICATOR	#22#		#22#
FORCE TELL INDICATOR	TR		T#
EMERGENCY INDICATOR	#22R		#22#
COMMAND AND CONTROL INDICATOR	TR		T#
SIMULATION INDICATOR	#22R		#22R
ACTIVE RELAY INDICATOR, WIDE AREA NETWORK	TR		TR
RTT REPLY STATUS INDICATOR	TR		TR
NETWORK PARTICIPATION STATUS INDICATOR	TR		TR
TIME QUALITY	TR		TR
GEODETTIC POSITION QUALITY	TR		TR
STRENGTH	##		##
ELEVATION, 25 FT	TR		TR
MISSION CORRELATOR	##		##
ELEVATION QUALITY	TR		TR

<u>J2.5E0</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
LATITUDE, 0.0013 MINUTE	TR		TR
LONGITUDE, 0.0013 MINUTE	TR		TR

<u>J2.5C1</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
VOICE CALL SIGN INDICATOR	#22#		#22#
VOICE CALL SIGN	#22#		#22#
LAND (GROUND) PLATFORM	T#		T#
LAND (GROUND) PLATFORM ACTIVITY	##		##
VOICE FREQUENCY/CHANNEL	T#		T#
CONTROL CHANNEL	T#		T#

APPENDIX A

TABLE A.5-J2.5. Word, Data Element, and Data Item Minimum Implementation
(Sheet 2 of 2)

DATA ELEMENT LEVEL (continued)

<u>J2.5C1 (continued)</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
ACTIVE RELAY INDICATOR, VOICE CHANNEL	T#		T#
ACTIVE RELAY INDICATOR, CONTROL CHANNEL	T#		T#
VOICE FREQUENCY/CHANNEL INDICATOR	T#		T#
<u>J2.5C3</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
U COORDINATE	TR		TR
V COORDINATE	TR		TR
BETA ANGLE	TR		TR
RELATIVE POSITION QUALITY	TR		TR
RELATIVE AZIMUTH QUALITY	TR		TR
<u>J2.5C4</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
LATITUDE, 0.0103 MINUTE	TR		TR
LONGITUDE, 0.0103 MINUTE	TR		TR
<u>J2.5C6</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
TIME TAG, TIME OF VALIDITY	TR		TR
UNIVERSAL TRANSVERSE MERCATOR 100, 000 METER SQUARE ROW	TR		TR
UNIVERSAL TRANSVERSE MERCATOR 100, 000 METER SQUARE COLUMN	TR		TR
UNIVERSAL TRANSVERSE MERCATOR GRID ZONE ROW	TR		TR
UNIVERSAL TRANSVERSE MERCATOR 10-METER NORTHING	TR		TR
UNIVERSAL TRANSVERSE MERCATOR 10-METER EASTING	TR		TR
UNIVERSAL TRANSVERSE MERCATOR GRID ZONE COLUMN	TR		TR

MIL-STD-6016B

APPENDIX A

TABLE A.5-J2.6. Word, Data Element, and Data Item Minimum Implementation
(Sheet 1 of 2)

WORD LEVEL

<u>WORD</u>	<u>MIN IMP</u>
J2.6I	TR
J2.6E0	TR
J2.6C1	T#
J2.6C3	##
J2.6C6	##

DATA ELEMENT LEVEL

<u>J2.6I</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
EXERCISE INDICATOR	#22R		#22R
FORCE TELL INDICATOR	TR		T#
EMERGENCY INDICATOR	#22R		#22#
COMMAND AND CONTROL INDICATOR	TR		T#
SIMULATION INDICATOR	#22R		#22R
ACTIVE RELAY INDICATOR, WIDE AREA NETWORK	TR		TR
RTT REPLY STATUS INDICATOR	TR		TR
NETWORK PARTICIPATION STATUS INDICATOR	TR		TR
TIME QUALITY	TR		TR
GEODETIC POSITION QUALITY	TR		TR
STRENGTH	##		##
ELEVATION, 25 FT	TR		TR
MISSION CORRELATOR	##		##
ELEVATION QUALITY	TR		TR

<u>J2.6E0</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
LATITUDE, 0.0013 MINUTE	TR		TR
LONGITUDE, 0.0013 MINUTE	TR		TR
COURSE	TR		TR
SPEED	TR		TR

<u>J2.6C1</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
VOICE CALL SIGN INDICATOR	#22#		#22#
VOICE CALL SIGN	#22#		#22#
LAND (GROUND) PLATFORM	T#		T#
LAND (GROUND) PLATFORM ACTIVITY	##		##
VOICE FREQUENCY/CHANNEL	T#		T#
CONTROL CHANNEL	T#		T#

APPENDIX A

TABLE A.5-J2.6. Word, Data Element, and Data Item Minimum Implementation
(Sheet 2 of 2)

DATA ELEMENT LEVEL (continued)

<u>J2.6C1 (continued)</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
ACTIVE RELAY INDICATOR, VOICE CHANNEL	T#		T#
ACTIVE RELAY INDICATOR, CONTROL CHANNEL	T#		T#
VOICE FREQUENCY/CHANNEL INDICATOR	T#		T#
<u>J2.6C3</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
U COORDINATE	TR		TR
V COORDINATE	TR		TR
BETA ANGLE	TR		TR
RELATIVE POSITION QUALITY	TR		TR
RELATIVE AZIMUTH QUALITY	TR		TR
<u>J2.6C6</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
TIME TAG, TIME OF VALIDITY	TR		TR
UNIVERSAL TRANSVERSE MERCATOR 100, 000 METER SQUARE ROW	TR		TR
UNIVERSAL TRANSVERSE MERCATOR 100, 000 METER SQUARE COLUMN	TR		TR
UNIVERSAL TRANSVERSE MERCATOR GRID ZONE ROW	TR		TR
UNIVERSAL TRANSVERSE MERCATOR 10-METER NORTHING	TR		TR
UNIVERSAL TRANSVERSE MERCATOR 10-METER EASTING	TR		TR
UNIVERSAL TRANSVERSE MERCATOR GRID ZONE COLUMN	TR		TR

MIL-STD-6016B

APPENDIX A

TABLE A.5-J3.0. Word, Data Element, and Data Item Minimum Implementation
(Sheet 1 of 3)

WORD LEVEL

<u>WORD</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
J3.0I	TR		XR
J3.0E0	TR		XR
J3.0C1	##		X#
J3.0C2	T63R63		XR63
J3.0C3	##		X#
J3.0C4	T92R92		XR92
J3.0C5	#117#117		X#117

DATA ELEMENT LEVEL

<u>J3.0I</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
EXERCISE INDICATOR	#59R59		XR59
RESPONSE INDICATOR	T#		X#
FORCE TELL INDICATOR	TR		X#
SPECIAL PROCESSING INDICATOR	#22R		X#
SIMULATION INDICATOR	#22R		XR
TRACK NUMBER, REFERENCE	TR		XR
SLAVED INDICATOR	#22R		XR
LINE/AREA CONTINUATION INDICATOR	TR		XR64
PERIODIC REPORT INDICATOR	T#		X#
TIME FUNCTION	##		X#
POINT/LINE/AREA DESCRIPTOR, 1	TR		XR
PRIORITY	##		X#
POINT TYPE	T93R93		XR93
POINT AMPLIFICATION	##		X#
MINUTE	##		#X
HOUR	##		X#

<u>J3.0E0</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
TYPE OF BURST	##		X#
LATITUDE, 0.0103 MINUTE	TR		XR
ESTIMATED YIELD	##		X#
LONGITUDE, 0.0103 MINUTE	TR		XR
ALTITUDE, 100 FT 1	##		X#
ALTITUDE, 100 FT 2	##		X#

MIL-STD-6016B

APPENDIX A

TABLE A.5-J3.0. Word, Data Element, and Data Item Minimum Implementation
(Sheet 2 of 3)

DATA ELEMENT LEVEL (continued)

<u>J3.0C1</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
DELTA LATITUDE, 0.0313 MINUTE 1	TR		XR
DELTA LONGITUDE, 0.0313 MINUTE 1	TR		XR
END POINT, 1	TR		XR
DELTA LATITUDE, 0.0313 MINUTE 2	#R		XR
DELTA LONGITUDE, 0.0313 MINUTE 2	#R		XR
END POINT, 2	#R		XR

<u>J3.0C2</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
SPEED	#R		XR
TRACK NUMBER, RELATED	T62R62		XR62
COURSE	#R		XR
SQUARE/CIRCLE SWITCH	##		X#
AXIS ORIENTATION	##		X#
AREA MAJOR AXIS	##		X#
AREA MINOR AXIS	##		X#

<u>J3.0C3</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
CHANNEL NUMBER, SONOBUOY RF	T105R105		XR105
DEPTH INDICATOR (SONOBUOY)	##		X#
DEPTH, TRANSDUCER (SONOBUOY)	##		X#
SONOBUOY TYPE	T105R105		XR105
SONOBUOY PATTERN	##		X#
SONOBUOY TYPE NUMBER	##		X#
SONOBUOY SPACING	##		X#
SONOBUOY ROW SPACING	##		X#
SONOBUOY PATTERN RADIUS	##		X#
BEARING, ASW PLOT	T106R106		XR106
HOLDING CONTACT	##		X#

<u>J3.0C4</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
TRACK NUMBER, RELATED 1	T92R92		XR92
SONOBUOY TYPE, 1	#114#114		X#114

<u>J3.0C5</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
ENVIRONMENT/CATEGORY	#98#		X#
AIR AMPLIFICATION	#53#53		X#53
SURFACE (MARITIME) AMPLIFICATION	#53#53		X#53
SUBSURFACE (MARITIME) AMPLIFICATION	#53#53		X#53

MIL-STD-6016B

APPENDIX A

TABLE A.5-J3.0. Word, Data Element, and Data Item Minimum Implementation
(Sheet 3 of 3)

DATA ELEMENT LEVEL (continued)

<u>J3.0C5 (continued)</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
LAND (GROUND) AMPLIFICATION	#53#53		X#53
SPACE AMPLIFICATION	#53#53		X#53
AMPLIFICATION CONFIDENCE	##		X#
SQUARE/CIRCLE SWITCH	TR		XR
AXIS ORIENTATION	TR		XR
AREA MAJOR AXIS, 4	TR		XR
AREA MINOR AXIS, 4	TR		X#
SECOND	TR		X#
TRACK NUMBER, RELATED 2	#102#102		X#
CONNECT/DISCONNECT	#104#104		X#104

MIL-STD-6016B

APPENDIX A

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

APPENDIX A

TABLE A.5-J3.1. Word, Data Element, and Data Item Minimum Implementation

WORD LEVEL

<u>WORD</u>	<u>MIN IMP</u>
J3.1I	TR
J3.1E0	TR
J3.1C1	##

DATA ELEMENT LEVEL

<u>J3.1I</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
EXERCISE INDICATOR	#22R
SPECIAL PROCESSING INDICATOR	#22R
SIMULATION INDICATOR	#22R
TRACK NUMBER, REFERENCE	TR
PERSONNEL INVOLVED	##
EMERGENCY TYPE	##
TRACK NUMBER, PREVIOUSLY REPORTED	##

<u>J3.1E0</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
LATITUDE, 0.0051 MINUTE	TR
LONGITUDE, 0.0051 MINUTE	TR
TIME FUNCTION	##
POSITION ACCURACY	##
MINUTE	##
hour	##

<u>J3.1C1</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
MODE I CODE	#22#
MODE II CODE	#22#
MODE III CODE	#22#
MODE IV INDICATOR	##

MIL-STD-6016B

APPENDIX A

TABLE A.5-J3.2. Word, Data Element, and Data Item Minimum Implementation
(Sheet 1 of 2)

WORD LEVEL

<u>WORD</u>	<u>C² JU</u>	<u>MIN IMP</u> <u>NONC² JU</u>
J3.2I	TR	XR
J3.2E0	TR	XR
J3.2C1	#110R	X#
J3.2C4	##	X#

DATA ELEMENT LEVEL

<u>J3.2I</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u> <u>NONC² JU</u>
EXERCISE INDICATOR	TR	XR
PPLI TRACK NUMBER AND IDENTITY INDICATOR	TR	X#
FORCE TELL INDICATOR	TR	X#
EMERGENCY INDICATOR	TR	X#
SPECIAL PROCESSING INDICATOR	#22R	X#
SIMULATION INDICATOR	#22R	XR
TRACK NUMBER, REFERENCE	TR	XR
STRENGTH	TR	XR
ALTITUDE SOURCE	##	X#
ALTITUDE, 25 FT	TR	XR
IDENTITY DIFFERENCE INDICATOR	TR	X#
TRACK QUALITY	TR	X#
IDENTITY CONFIDENCE	N22N	XN
IDENTITY	T10R	XR
IDENTITY AMPLIFYING DESCRIPTOR	TR	XR
SPECIAL INTEREST INDICATOR	TR	XR

<u>J3.2E0</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u> <u>NONC² JU</u>
LATITUDE, 0.0051 MINUTE	TR	XR
LONGITUDE, 0.0051 MINUTE	TR	XR
PASSIVE/ACTIVE INDICATOR	TR	X#
COURSE	TR	XR
SPEED	TR	TR

MIL-STD-6016B

APPENDIX A

TABLE A.5-J3.2. Word, Data Element, and Data Item Minimum Implementation
(Sheet 2 of 2)

DATA ELEMENT LEVEL (continued)

<u>J3.2C1</u> <u>DATA ELEMENT</u>	<u>REPORTING REAL</u> <u>TIME TRACKS</u>	<u>C² JU</u>	<u>MIN IMP</u> <u>REPORTING NONREAL</u> <u>TIME TRACKS</u>	<u>NONC² JU</u>
AIR SPECIFIC TYPE INDICATOR	#22#		#22#	X#
MODE I CODE	TR		#22#	X#
MODE II CODE	TR		#22#	X#
MODE III CODE	TR		#22#	X#
MODE IV INDICATOR	TR		##	X#
PPLI IFF/SIF INDICATOR	TR		##	X#
AIR PLATFORM	#111#60		#60#60	X#60
AIR PLATFORM ACTIVITY	#111#60		#60#60	X#60
AIR SPECIFIC TYPE	#60#60		#60#60	X#60
MINUTE	NN		T#	X#
HOURL	NN		T#	X#

<u>J3.2C4</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
CALLSIGN, PUBLISHED	TR		XR

MIL-STD-6016B

APPENDIX A

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

APPENDIX A

TABLE A.5-J3.3. Word, Data Element, and Data Item Minimum Implementation
(Sheet 1 of 2)

WORD LEVEL

<u>WORD</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
J3.3I	TR		XR
J3.3E0	TR		XR
J3.3C1	TR		X#
J3.3C2	##		##

DATA ELEMENT LEVEL

<u>J3.3I</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
EXERCISE INDICATOR	TR		XR
PPLI TRACK NUMBER AND IDENTITY INDICATOR	TR		X#
FORCE TELL INDICATOR	TR		X#
EMERGENCY INDICATOR	TR		X#
SPECIAL PROCESSING INDICATOR	#22R		X#
SIMULATION INDICATOR	#22R		XR
TRACK NUMBER, REFERENCE	TR		XR
STRENGTH	TR		XR
SURFACE (MARITIME) SPECIFIC TYPE	##		X#
IDENTITY DIFFERENCE INDICATOR	TR		X#
TRACK QUALITY	TR		X#
IDENTITY CONFIDENCE	N22N		XN
IDENTITY	TR		XR
IDENTITY AMPLIFYING DESCRIPTOR	TR		XR
SPECIAL INTEREST INDICATOR	TR		XR

<u>J3.3E0</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
LATITUDE, 0.0051 MINUTE	TR		XR
LONGITUDE, 0.0051 MINUTE	TR		XR
PASSIVE/ACTIVE INDICATOR	TR		X#
COURSE	TR		XR
SPEED	TR		XR

<u>J3.3C1</u> <u>DATA ELEMENT</u>	<u>REPORTING REAL</u> <u>TIME TRACKS</u>	<u>MIN IMP</u> <u>C² JU</u>	<u>REPORTING NONREAL</u> <u>TIME TRACKS</u>	<u>NONC² JU</u>
MODE I CODE	TR	#22#		X#
MODE II CODE	TR	#22#		X#
MODE III CODE	TR	#22#		X#
MODE IV INDICATOR	TR	##		X#

MIL-STD-6016B

APPENDIX A

TABLE A.5-J3.3. Word, Data Element, and Data Item Minimum Implementation
(Sheet 2 of 2)

DATA ELEMENT LEVEL (continued)

<u>J3.3C1 (continued)</u> <u>DATA ELEMENT</u>	<u>REPORTING REAL</u> <u>TIME TRACKS</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
		<u>REPORTING NONREAL</u> <u>TIME TRACKS</u>		
PPLI IFF/SIF INDICATOR	TR	##		X#
SURFACE (MARITIME) PLATFORM	##	##		X#
SURFACE (MARITIME) PLATFORM ACTIVITY	##	##		X#
MINUTE	NN	T#		X#
HOURL	NN	T#		X#

<u>J3.3C2</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
SAM/SSM TYPE, 1	TR		XR
SAM/SSM TYPE, 2	TR		XR
SAM/SSM TYPE, 3	TR		XR

APPENDIX A

TABLE A.5-J3.4. Word, Data Element, and Data Item Minimum Implementation
(Sheet 1 of 2)

WORD LEVEL

<u>WORD</u>	<u>MIN IMP</u>
J3.4I	TR
J3.4E0	TR
J3.4C1	#R
J3.4C2	##

DATA ELEMENT LEVEL

<u>J3.4I</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
EXERCISE INDICATOR	TR
PPLI TRACK NUMBER AND IDENTITY INDICATOR	TR
FORCE TELL INDICATOR	TR
EMERGENCY INDICATOR	TR
SPECIAL PROCESSING INDICATOR	#22R
SIMULATION INDICATOR	#22R
TRACK NUMBER, REFERENCE	TR
DATA REPORT TYPE	TR
IDENTITY	TR
IDENTITY AMPLIFYING DESCRIPTOR	TR
CONFIDENCE LEVEL	##
SUBSURFACE (MARITIME) PLATFORM	##
SUBSURFACE (MARITIME) PLATFORM ACTIVITY	##
IDENTITY DIFFERENCE INDICATOR	TR
LAUNCH CAPABILITY	##

<u>J3.4E0</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
LATITUDE, 0.0051 MINUTE	TR
LONGITUDE, 0.0051 MINUTE	TR
COURSE	TR
SPEED, ASW	TR

<u>J3.4C1</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
MINUTE	TR
HOUR	TR
DEPTH, 15 METERS	##
DEPTH CONTACT	TR
SENSOR	##
MODE I CODE	TR
MODE II CODE	TR

APPENDIX A

TABLE A.5-J3.4. Word, Data Element, and Data Item Minimum Implementation
(Sheet 2 of 2)

DATA ELEMENT LEVEL (continued)

<u>J3.4C1 (continued)</u>	
<u>DATA ELEMENT</u>	<u>MIN IMP</u>
MODE III CODE	TR
MODE IV INDICATOR	##
TIME FUNCTION, ASW	TR

<u>J3.4C2</u>	
<u>DATA ELEMENT</u>	<u>MIN IMP</u>
SUBSURFACE (MARITIME) SPECIFIC TYPE	##

APPENDIX A

J3.5 Word, Data Element, and Data Item Minimum Implementation

To determine the words, data elements, and data items in the J3.5 message that are required for implementation, first, enter Table A.5-J3.5-1 from the left to determine the implementation for each Point/Track Indicator value by a C^2 JU or a non C^2 JU. Next, enter Table A.5-J3.5-2 from the left at each value that will be implemented and proceed across the row to determine the required word implementation by a C^2 JU or a non C^2 JU. Then, enter Table A.5-J3.5-3 from the top at an action value that will be implemented and proceed down the column to determine the required data element implementation for each word by a C^2 JU or a non C^2 JU. At each level, the transmit and receive requirements are considered separately, with no interaction between them.

MIL-STD-6016B

APPENDIX A

TABLE A.5-J3.5-1. Point/Track Indicator Value Minimum Implementation for the J3.5 Message

POINT/TRACK INDICATOR VALUE	MIN IMP	
	C ² JU	NONC ² JU
0 - POINT	TR	X#
1 - TRACK	##	X#

TABLE A.5-J3.5-2. Word Level Minimum Implementation by Point/Track Indicator Value

POINT/TRACK INDICATOR VALUE	J3.5 WORDS					
	J3.5I		J3.5E0		J3.5C1	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
0 - POINT	TR	XR	TR	XR	##	X#
1 - TRACK	TR	XR	TR	XR	##	X#

POINT/TRACK INDICATOR VALUE	J3.5 WORDS			
	J3.5C2		J3.5C3	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU
0 - POINT	##	X#	##	X#
1 - TRACK	##	X#	##	X#

MIL-STD-6016B

APPENDIX A

TABLE A.5-J3.5-3. Data Level Minimum Implementation by Point/Track Indicator Value (Sheet 1 of 2)

<u>J3.5I</u> <u>DATA ELEMENT</u>	POINT/TRACK INDICATOR VALUE			
	0		1	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU
EXERCISE INDICATOR	TR	XR	TR	XR
FORCE TELL INDICATOR	TR	X#	TR	X#
EMERGENCY INDICATOR	TR	X#	TR	X#
SPECIAL PROCESSING INDICATOR	#22R	X#	#22R	X#
SIMULATION INDICATOR	#22R	XR	#22R	XR
TRACK NUMBER, REFERENCE	TR	XR	TR	XR
STRENGTH	##	X#	##	X#
ELEVATION, 25 FT	#24#	X#	#24#	X#
PERIODIC REPORT INDICATOR	T#	X#	NN	XN
PPLI TRACK NUMBER AND IDENTITY INDICATOR	TR	X#	TR	X#
IDENTITY DIFFERENCE INDICATOR	##	X#	TR	X#
TRACK QUALITY	N22N	XN	TR	X#
IDENTITY CONFIDENCE	N22N	XN	N22N	XN
IDENTITY	TR	XR	TR	XR
IDENTITY AMPLIFYING DESCRIPTOR	TR	XR	TR	XR
SPECIAL INTEREST INDICATOR	##	X#	##	X#
<u>J3.5E0</u> <u>DATA ELEMENT</u>				
TRACK IDENTIFIER	##	X#	##	X#
LATITUDE, 0.0051 MINUTE	TR	XR	TR	XR
LONGITUDE, 0.0051 MINUTE	TR	XR	TR	XR
PASSIVE/ACTIVE INDICATOR	#22#	X#	#40#	X#
COURSE	NN	XN	TR	X#
SPEED	NN	XN	TR	X#
<u>J3.5C1</u> <u>DATA ELEMENT</u>				
LAND (GROUND) SPECIFIC TYPE INDICATOR	#22#	X#	#22#	X#
MODE I CODE	##	X#	##	X#
MODE II CODE	##	X#	##	X#
MODE III CODE	##	X#	##	X#
MODE IV INDICATOR	##	X#	##	X#
PPLI IFF/SIF INDICATOR	NN	XN	NN	XN
LAND (GROUND) PLATFORM	#45#45	X#45	#45#45	X#45
LAND (GROUND) PLATFORM ACTIVITY	#45#45	X#45	#45#45	X#45
LAND (GROUND) SPECIFIC TYPE	#45#45	X#45	#45#45	X#45
TIME FUNCTION	##	X#	T65#65	X#
MINUTE				
HOURL				
<u>J3.5C2</u> <u>DATA ELEMENT</u>				
TIME TAG, TIME OF VALIDITY	TR	XR	TR	XR

MIL-STD-6016B

APPENDIX A

TABLE A.5-J3.5-3. Data Level Minimum Implementation by Point/Track Indicator Value (Sheet 2 of 2)

<u>J3.5C2(continued)</u> <u>DATA ELEMENT</u>	POINT/TRACK INDICATOR VALUE			
	0		1	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU
UNIVERSAL TRANSVERSE MERCATOR 100,000 METER SQUARE ROW	TR	XR	TR	XR
UNIVERSAL TRANSVERSE MERCATOR 100,000 METER SQUARE COLUMN	TR	XR	TR	XR
UNIVERSAL TRANSVERSE MERCATOR GRID ZONE ROW	TR	XR	TR	XR
UNIVERSAL TRANSVERSE MERCATOR 10-METER NORTHING	TR	XR	TR	XR
UNIVERSAL TRANSVERSE MERCATOR 10-METER EASTING	TR	XR	TR	XR
UNIVERSAL TRANSVERSE MERCATOR GRID ZONE COLUMN	TR	XR	TR	XR
<u>J3.5C3</u> <u>DATA ELEMENT</u>				
STRENGTH, TOTAL NUMBER OF VEHICLES	TR	XR	TR	XR
STRENGTH, PERCENT OF TRACKED VEHICLES	TR	XR	TR	XR
AREA MINOR AXIS, 3	TR	X#	TR	X#
AREA MAJOR AXIS, 3	TR	X#	TR	X#
AXIS ORIENTATION	TR	X#	TR	X#
ROUTE NUMBER, 1	TR	X#	TR	X#
SQUARE/CIRCLE SWITCH	##	X#	X#	X#
LATITUDE, LSBS	##	X#	X#	X#
LONGITUDE, LSBS	##	X#	X#	X#

MIL-STD-6016B

APPENDIX A

TABLE A.5-J3.6. Word, Data Element, and Data Item Minimum Implementation
(Sheet 1 of 3)

WORD LEVEL

<u>WORD</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
J3.6I	TR		XR
J3.6E0	TR		XR
J3.6E1	TR		XR
J3.6C1	TR103		X#
J3.6C2	##		X#
J3.6C3	##		X#
J3.6C4	##		X#
J3.6C5	TR103		#R

DATA ELEMENT LEVEL

<u>J3.6I</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
EXERCISE INDICATOR	TR		XR
FORCE TELL INDICATOR	TR		XR
SPECIAL PROCESSING INDICATOR	#22R		X#
SIMULATION INDICATOR	#22R		XR
SPACE SPECIFIC TYPE INDICATOR	TR		XR
TRACK NUMBER, REFERENCE	TR		XR
MINUTE	TR		XR
SECOND	TR		XR
TRACK QUALITY, 1	TR		X#
IDENTITY	TR		XR
IDENTITY AMPLIFYING DESCRIPTOR	TR		XR
IDENTITY DIFFERENCE INDICATOR	TR		#R
SPACE SPECIFIC TYPE	TR		XR
SPACE PLATFORM	TR		XR
SPACE PLATFORM ACTIVITY	##		X#

<u>J3.6E0</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
X POSITION IN WGS-84	TR		XR
X VELOCITY IN WGS-84	TR		XR
Y POSITION IN WGS-84	TR		XR
SPACE AMPLIFICATION	TR		X#
AMPLIFICATION CONFIDENCE	##		X#

MIL-STD-6016B

APPENDIX A

TABLE A.5-J3.6. Word, Data Element, and Data Item Minimum Implementation
(Sheet 2 of 3)

DATA ELEMENT LEVEL (continued)

<u>J3.6E1</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
Y VELOCITY IN WGS-84	TR		XR
Z POSITION IN WGS-84	TR		XR
Z VELOCITY IN WGS-84	TR		XR
LOST TRACK INDICATOR	TR		X#
BOOST INDICATOR	TR		XR
DATA INDICATOR	TR		XR

<u>J3.6C1</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
SIGMA X POSITION	TR		X#
SIGMA Y POSITION	TR		X#
SIGMA Z POSITION	TR		X#
COVARIANCE DATA ELEMENT 22	TR		X#
COVARIANCE DATA ELEMENT 33	TR		X#
SIGN OF COVARIANCE DATA ELEMENT 23	TR		X#
ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 23	TR		X#
SIGN OF COVARIANCE DATA ELEMENT 12	TR		X#
SIGN OF COVARIANCE DATA ELEMENT 13	TR		X#

<u>J3.6C2</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
SIGMA X VELOCITY	TR		X#
SIGMA Y VELOCITY	TR		X#
SIGMA Z VELOCITY	TR		X#
ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 24	TR		X#
SIGN OF COVARIANCE DATA ELEMENT 34	TR		X#
ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 34	TR		X#
COVARIANCE DATA ELEMENT 44	TR		X#
SIGN OF COVARIANCE DATA ELEMENT 14	TR		X#

<u>J3.6C3</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
SIGN OF COVARIANCE DATA ELEMENT 25	TR		X#
ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 25	TR		X#
SIGN OF COVARIANCE DATA ELEMENT 35	TR		X#
ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 35	TR		X#
SIGN OF COVARIANCE DATA ELEMENT 45	TR		X#

MIL-STD-6016B

APPENDIX A

TABLE A.5-J3.6. Word, Data Element, and Data Item Minimum Implementation
(Sheet 3 of 3)

DATA ELEMENT LEVEL (continued)

<u>J3.6C3 (continued)</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 45	TR		X#
COVARIANCE DATA ELEMENT 55	TR		X#
SIGN OF COVARIANCE DATA ELEMENT 15	TR		X#
BALLISTIC MISSILE BETA	##		X#
BALLISTIC MISSILE ACCELERATION	##		X#

<u>J3.6C4</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
SIGN OF COVARIANCE DATA ELEMENT 26	TR		X#
ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 26	TR		X#
SIGN OF COVARIANCE DATA ELEMENT 36	TR		X#
ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 36	TR		X#
SIGN OF COVARIANCE DATA ELEMENT 46	TR		X#
ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 46	TR		X#
SIGN OF COVARIANCE DATA ELEMENT 56	TR		X#
ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 56	TR		X#
COVARIANCE DATA ELEMENT 66	TR		X#
SIGN OF COVARIANCE DATA ELEMENT 16	TR		X#

<u>J3.6C5</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
SIGMA X VELOCITY	TR		X#
SIGMA Y VELOCITY	TR		X#
SIGMA Z VELOCITY	TR		X#
VELOCITY COVARIANCE DATA ELEMENT 22	TR		X#
VELOCITY COVARIANCE DATA ELEMENT 33	TR		X#
SIGN OF VELOCITY COVARIANCE DATA ELEMENT 23	TR		X#
ABSOLUTE VALUE OF VELOCITY COVARIANCE DATA ELEMENT 23	TR		X#
SIGN OF VELOCITY COVARIANCE DATA ELEMENT 12	TR		X#
SIGN OF VELOCITY COVARIANCE DATA ELEMENT 13	TR		X#

MIL-STD-6016B

APPENDIX A

THIS PAGE INTENTIONALLY LEFT BLANK

APPENDIX A

J3.7 Word, Data Element, and Data Item Minimum Implementation

To determine the words, data elements, and data items in the J3.7 message that are required for implementation, first, enter Table A.5-J3.7-1 from the left to determine the implementation for each Fix or Bearing Descriptor value. Next, enter Table A.5-J3.7-2 from the left at each value that will be implemented and proceed across the row to determine the required word implementation. Then, enter Table A.5-J3.7-3 from the top at an action value that will be implemented and proceed down the column to determine the required data element implementation for each word. At each level, the transmit and receive requirements are considered separately, with no interaction between them.

MIL-STD-6016B

APPENDIX A

TABLE A.5-J3.7-1. Fix or Bearing Descriptor Value Minimum Implementation for the J3.7 Message

FIX OR BEARING DESCRIPTOR VALUE	MIN IMP
0 - EW FIX	#R
1 - AREA OF PROBABILITY	#R
2 - BEARING, TYPE NOT SPECIFIED	##
3 - BEARING, ES	##
4 - BEARING, EA	##
5 - BEARING, RADIO DIRECTION FINDING	##
6 - DISUSED	XX
7 - BEARING, UNKNOWN	##

TABLE A.5-J3.7-2. Word Level Minimum Implementation by Fix or Bearing Descriptor Value

FIX OR BEARING DESCRIPTOR VALUE	J3.7 WORDS					
	J3.7I	J3.7C1	J3.7C2	J3.7C3	J3.7C4	J3.7C5
0 - EW FIX	TR	TR	TR	##	##	##
1 - AREA OF PROBABILITY	TR	TR	TR	##	##	##
2 - BEARING, TYPE NOT SPECIFIED	TR	TR	TR	##	##	##
3 - BEARING, ES	TR	TR	TR	##	##	##
4 - BEARING, EA	TR	TR	TR	##	##	##
5 - BEARING, RADIO DIRECTION FINDING	TR	TR	TR	##	##	##
6 - DISUSED	XX	XX	XX	XX	XX	XX
7 - BEARING, UNKNOWN	TR	TR	TR	#48#48	#48#48	##

MIL-STD-6016B

APPENDIX A

TABLE A.5-J3.7-3. Data Element Level Minimum Implementation by Fix or Bearing Descriptor Value (Sheet 1 of 4)

J3.7I DATA ELEMENT	FIX OR BEARING DESCRIPTOR VALUE			
	0	1	2	3
EXERCISE INDICATOR	TR	TR	TR	TR
FORCE TELL INDICATOR	TR	TR	TR	TR
EMERGENCY INDICATOR	##	##	##	##
SPECIAL PROCESSING INDICATOR	#22R	#22R	#22R	#22R
SIMULATION INDICATOR	#22R	#22R	#22R	#22R
TRACK NUMBER, REFERENCE	TR	TR	TR	TR
RESPONSE INDICATOR	T#	T#	T#	T#
SECOND	TR	TR	TR	TR
MINUTE	TR	TR	TR	TR
HOURL	TR	TR	TR	TR
IDENTITY DIFFERENCE INDICATOR	##	##	##	##
SQUARE/CIRCLE SWITCH	NN	TR	NN	NN
IDENTITY	TR	TR	TR	TR
IDENTITY AMPLIFYING DESCRIPTOR	TR	TR	TR	TR
J3.7C1 DATA ELEMENT				
BEARING ORIGIN	N22N22	N22N22	#40#	#40#
BEARING	NN	NN	TR	TR
TRACK NUMBER, ORIGIN	NN	NN	TR	TR
BEARING ACCURACY	NN	NN	TR	TR
ELEVATION ANGLE	NN	NN	##	##
PLATFORM EVALUATION CONFIDENCE	##	##	##	##
IDENTITY CONFIDENCE	N22N	N22N	N22N	N22N
ENVIRONMENT/CATEGORY	TR	TR	TR	TR
J3.7C2 DATA ELEMENT				
LATITUDE, 0.0051 MINUTE	TR	TR	TR	TR
LONGITUDE, 0.0051 MINUTE	TR	TR	TR	TR
AREA MAJOR AXIS	NN	TR	NN	NN
AREA MINOR AXIS	NN	TR	NN	NN
AXIS ORIENTATION	NN	TR	NN	NN
J3.7C3 DATA ELEMENT				
COURSE	##	##	NN	NN
SPEED	##	##	NN	NN
ALTITUDE, 25 FT	##	##	#23#	#23#
EMITTER NUMBER INDICATOR	#49#49	#49#49	#49#49	#49#49
EMITTER NUMBER	##	##	##	##
WARTIME RESERVE MODE INDICATOR	#49#49	#49#49	#49#49	#49#49
EMITTER CONFIDENCE	##	##	##	##

MIL-STD-6016B

APPENDIX A

TABLE A.5-J3.7-3. Data Element Level Minimum Implementation by Fix or Bearing Descriptor Value (Sheet 2 of 4)

J3.7C4 DATA ELEMENT	FIX OR BEARING DESCRIPTOR VALUE			
	0	1	2	3
SPACE PLATFORM	##	##	##	##
AIR PLATFORM	##	##	##	##
SURFACE (MARITIME) PLATFORM	##	##	##	##
SUBSURFACE (MARITIME) PLATFORM	##	##	##	##
LAND (GROUND) PLATFORM	##	##	##	##
MODE NUMBER	##	##	##	##
FREQUENCY/FREQUENCY RANGE INDICATOR	TR	TR	TR	TR
FREQUENCY MULTIPLIER, 1	TR	TR	TR	TR
FREQUENCY, 1	TR	TR	TR	TR
FREQUENCY MULTIPLIER, 2	T47R	T47R	T47R	T47R
FREQUENCY, 2	T47R	T47R	T47R	T47R
J3.7C5 DATA ELEMENT				
SPACE SPECIFIC TYPE	##	##	##	##
AIR SPECIFIC TYPE	##	##	##	##
SURFACE (MARITIME) SPECIFIC TYPE	##	##	##	##
SUBSURFACE (MARITIME) SPECIFIC TYPE	##	##	##	##
LAND (GROUND) SPECIFIC TYPE	##	##	##	##

MIL-STD-6016B

APPENDIX A

TABLE A.5-J3.7-3. Data Element Level Minimum Implementation by Fix or Bearing Descriptor Value (Sheet 3 of 4)

J3.7I DATA ELEMENT	FIX OR BEARING DESCRIPTOR VALUE			
	4	5	6	7
EXERCISE INDICATOR	TR	TR	XX	TR
FORCE TELL INDICATOR	TR	TR	XX	TR
EMERGENCY INDICATOR	##	##	XX	##
SPECIAL PROCESSING INDICATOR	#22R	#22R	XX	#22R
SIMULATION INDICATOR	#22R	#22R	XX	#22R
TRACK NUMBER, REFERENCE	TR	TR	XX	TR
RESPONSE INDICATOR	T#	T#	XX	T#
SECOND	TR	TR	XX	TR
MINUTE	TR	TR	XX	TR
HOURL	TR	TR	XX	TR
IDENTITY DIFFERENCE INDICATOR	##	##	XX	##
SQUARE/CIRCLE SWITCH	NN	NN	XX	NN
IDENTITY	TR	TR	XX	TR
IDENTITY AMPLIFYING DESCRIPTOR	TR	TR	XX	XX
J3.7C1 DATA ELEMENT				
BEARING ORIGIN	#40#	#40#	XX	#40#
BEARING	TR	TR	XX	NN
TRACK NUMBER, ORIGIN	TR	TR	XX	TR
BEARING ACCURACY	TR	TR	XX	NN
ELEVATION ANGLE	##	##	XX	NN
PLATFORM EVALUATION CONFIDENCE	##	##	XX	##
IDENTITY CONFIDENCE	N22N	N22N	XX	N22N
ENVIRONMENT/CATEGORY	TR	TR	XX	TR
J3.7C2 DATA ELEMENT				
LATITUDE, 0.0051 MINUTE	TR	TR	XX	TR
LONGITUDE, 0.0051 MINUTE	TR	TR	XX	TR
AREA MAJOR AXIS	NN	NN	XX	NN
AREA MINOR AXIS	NN	NN	XX	NN
AXIS ORIENTATION	NN	NN	XX	NN
J3.7C3 DATA ELEMENT				
COURSE	NN	NN	XX	NN
SPEED	NN	NN	XX	NN
ALTITUDE, 25 FT	#23#	#23#	XX	#23#
EMITTER NUMBER INDICATOR	#49#49	#49#49	XX	#49#49
EMITTER NUMBER	##	##	XX	##
WARTIME RESERVE MODE INDICATOR	#49#49	#49#49	XX	#49#49
EMITTER CONFIDENCE	##	##	XX	##
J3.7C4 DATA ELEMENT				
SPACE PLATFORM	##	##	XX	##

MIL-STD-6016B

APPENDIX A

TABLE A.5-J3.7-3. Data Element Level Minimum Implementation by Fix or Bearing Descriptor Value (Sheet 4 of 4)

J3.7C4(continued) DATA ELEMENT	FIX OR BEARING DESCRIPTOR VALUE			
	4	5	6	7
AIR PLATFORM	##	##	XX	##
SURFACE (MARITIME) PLATFORM	##	##	XX	##
SUBSURFACE (MARITIME) PLATFORM	##	##	XX	##
LAND (GROUND) PLATFORM	##	##	XX	##
MODE NUMBER	##	##	XX	##
FREQUENCY/FREQUENCY RANGE INDICATOR	TR	TR	XX	TR
FREQUENCY MULTIPLIER, 1	TR	TR	XX	TR
FREQUENCY, 1	TR	TR	XX	TR
FREQUENCY MULTIPLIER, 2	T47R	T47R	XX	T47R
FREQUENCY, 2	T47R	T47R	XX	T47R
J3.7C5 DATA ELEMENT				
SPACE SPECIFIC TYPE	##	##	XX	##
AIR SPECIFIC TYPE	##	##	XX	##
SURFACE (MARITIME) SPECIFIC TYPE	##	##	XX	##
SUBSURFACE (MARITIME) SPECIFIC TYPE	##	##	XX	##
LAND (GROUND) SPECIFIC TYPE	##	##	XX	##

APPENDIX A

TABLE A.5-J5.4. Word, Data Element, and Data Item Minimum Implementation
(Sheet 1 of 2)

WORD LEVEL

<u>WORD</u>	<u>MIN IMP</u>
J5.4I	
J5.4E0	TR
J5.4C1	##
J5.4C2	##

DATA ELEMENT LEVEL

<u>J5.4I</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
EXERCISE INDICATOR	TR
PPLI TRACK NUMBER AND IDENTITY INDICATOR	TR
FORCE TELL INDICATOR	TR
EMERGENCY INDICATOR	TR
SPECIAL PROCESSING INDICATOR	#22R
SIMULATION INDICATOR	#22R
TRACK NUMBER, REFERENCE IDENTITY	TR
IDENTITY AMPLIFYING DESCRIPTOR	TR
CONFIDENCE LEVEL	##
SUBSURFACE (MARITIME) PLATFORM MINUTE	#R
HOURL	TR
BEARING DRIFT	TR
AUDIO	##
DOPPLER	##

<u>J5.4E0</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
LATITUDE, 0.0051 MINUTE	TR
LONGITUDE, 0.0051 MINUTE	TR
BEARING REPORT TYPE	TR
FREQUENCY, SOURCE ACOUSTIC	##
BEARING 1, ASW	TR

<u>J5.4C1</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
FREQUENCY, ASSOCIATED ACOUSTIC 1	##
FREQUENCY, ASSOCIATED ACOUSTIC 2	##
BEARING 2, ASW	T#
BROADBAND	##
RANGE ACCURACY, ASW	##
RANGE	T#

APPENDIX A

TABLE A.5-J5.4. Word, Data Element, and Data Item Minimum Implementation
(Sheet 2 of 2)

DATA ELEMENT LEVEL (continued)

<u>J5.4C1 (continued)</u>	
<u>DATA ELEMENT</u>	<u>MIN IMP</u>
SENSOR INDICATOR	##
BEARING ACCURACY, ASW	##

<u>J5.4C2</u>	
<u>DATA ELEMENT</u>	<u>MIN IMP</u>
DEPTH CONTACT	T#
SUBSURFACE (MARITIME) PLATFORM ACTIVITY	##
DEPTH, ABOVE/BELOW LAYER (SENSOR)	##
DEPTH, SENSOR	##
TRACK NUMBER, ORIGIN	##
SOUND PROPAGATION PATH	##

APPENDIX A

TABLE A.5-J6.0. Word, Data Element, and Data Item Minimum Implementation
(Sheet 1 of 2)

WORD LEVEL

<u>WORD</u>	<u>MIN IMP</u>
J6.0I	TR
J6.0E0	##
J6.0C1	##

DATA ELEMENT LEVEL

<u>J6.0I</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
ENVIRONMENT/CATEGORY	##
SPECIAL PROCESSING INDICATOR	TR
RESPONSE INDICATOR	TR
TRACK NUMBER, REFERENCE	TR
NATIONALITY/ALLIANCE OF TRACK	T#
SPACE PLATFORM	##
AIR PLATFORM	##
SURFACE (MARITIME) PLATFORM	##
SUBSURFACE (MARITIME) PLATFORM	##
LAND (GROUND) PLATFORM	##
SPACE PLATFORM ACTIVITY	##
AIR PLATFORM ACTIVITY	##
SURFACE (MARITIME) PLATFORM ACTIVITY	##
SUBSURFACE (MARITIME) PLATFORM ACTIVITY	##
LAND (GROUND) PLATFORM ACTIVITY	##
ACTIVITY AMPLIFICATION INDEX	##
OPERATIONAL STATUS	##

<u>J6.0E0</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
SPACE SPECIFIC TYPE	##
AIR SPECIFIC TYPE	##
SURFACE (MARITIME) SPECIFIC TYPE	##
SUBSURFACE (MARITIME) SPECIFIC TYPE	##
LAND (GROUND) SPECIFIC TYPE	##
TYPE MODIFICATION	##
TRACK NUMBER, OBJECTIVE	##
LOCAL DISCRETE IDENTIFIER	##
TRACK NUMBER, CONTROLLING AGENCY OF TN REFERENCE	##

APPENDIX A

TABLE A.5-J6.0. Word, Data Element, and Data Item Minimum Implementation
(Sheet 2 of 2)

DATA ELEMENT LEVEL (continued)

<u>J6.0C1</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
THREAT TYPE	TR
THREAT WEAPON	TR
THREAT FUEL	##
SAM/SSM TYPE, 1	TR
SAM/SSM TYPE, 2	TR
SAM/SSM TYPE, 3	TR

APPENDIX A

J7.0 Word, Data Element, and Data Item Minimum Implementation

To determine the words, data elements, and data items in the J7.0 message that are required for implementation, first, enter Table A.5-J7.0-1 from the left to determine the implementation requirements for each action value. Next, enter Table A.5-J7.0-2 from the left at an action value that will be implemented. Proceed across the row to determine the required word implementation. Then, enter Table A.5-J7.0-3 from the top at an action value that will be implemented. Proceed down the column to determine the required data element implementation. At each level, the transmit and receive requirements are considered separately, with no interaction between them.

MIL-STD-6016B

APPENDIX A

TABLE A.5-J7.0-1. Action, Track Management Value Minimum Implementation for the J7.0 Message

ACTION, TRACK MANAGEMENT VALUE	MIN IMP	
	C ² JU	NONC ² JU
0 - DROP TRACK REPORT	TR	XR
1 - DIFFERENCE REPORT	TR	X#
2 - CHANGE DATA ORDER	#R	X#
3 - EMERGENCY STATUS CHANGE	TR	X#
4 - FORCE TELL STATUS CHANGE	TR	X#
5 - STRENGTH CHANGE	#R	X#
6 - EXERCISE STATUS ORDER	TR	XR25
7 - UNDEFINED	XX	XX

TABLE A.5-J7.0-2. Word Level Minimum Implementation by Action, Track Management Value

ACTION, TRACK MANAGEMENT VALUE	J7.0 WORDS					
	J7.0I		J7.0E0		J7.0C1	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
0 - DROP TRACK REPORT	TR	XR	X#	X#	X#	X#
1 - DIFFERENCE REPORT	TR	XR	X#	X#	##	X#
2 - CHANGE DATA ORDER	TR	XR	X#	X#	##	X#
3 - EMERGENCY STATUS CHANGE	TR	XR	X#	X#	X#	X#
4 - FORCE TELL STATUS CHANGE	TR	XR	X#	X#	X#	X#
5 - STRENGTH CHANGE	TR	XR	T89R89	X#	X#	X#
6 - EXERCISE STATUS ORDER	TR	XR	X#	X#	X#	X#
7 - UNDEFINED	XX	XX	XX	XX	XX	XX

MIL-STD-6016B

APPENDIX A

TABLE A.5-J7.0-3. Data Level Minimum Implementation by Action, Track Management Value (Sheet 1 of 2)

<u>J7.0I</u> <u>DATA ELEMENT</u>	ACTION, TRACK MANAGEMENT VALUE			
	0	1	2	3
EXERCISE INDICATOR	N22N	TR	TR	N22N
CONTROLLING UNIT INDICATOR	N22N	#22R	#22R	N22N
TRACK NUMBER, REFERENCE	TR	TR	TR	TR
STRENGTH	NN	NN	NN	NN
ALERT STATUS CHANGE	N22N	N22N	N22N	TR
SPACE PLATFORM	NN	T44R44	T44R44	NN
AIR PLATFORM	NN	T44R44	T44R44	NN
SURFACE (MARITIME) PLATFORM	NN	T44R44	T44R44	NN
SUBSURFACE (MARITIME) PLATFORM	NN	T44R44	T44R44	NN
LAND (GROUND) PLATFORM	NN	T44R44	T44R44	NN
SPACE PLATFORM ACTIVITY	NN	##	##	NN
AIR PLATFORM ACTIVITY	NN	##	##	NN
SURFACE (MARITIME) PLATFORM ACTIVITY	NN	##	##	NN
SUBSURFACE (MARITIME) PLATFORM ACTIVITY	NN	##	##	NN
LAND (GROUND) PLATFORM ACTIVITY	NN	##	##	NN
ENVIRONMENT/CATEGORY	NN	TR	TR	NN
IDENTITY CONFIDENCE	N22N	N22N	N22N	N22N
IDENTITY	N22N	TR	TR	N22N
IDENTITY AMPLIFYING DESCRIPTOR	N22N	TR	TR	N22N
SPECIAL INTEREST INDICATOR	NN	#R	#R	NN
<u>J7.0E0</u> <u>DATA ELEMENT</u>				
STRENGTH, TOTAL NUMBER OF VEHICLES	X#	X#	X#	X#
STRENGTH, PERCENT OF TRACKED VEHICLES	X#	X#	X#	X#
<u>J7.0C1</u> <u>DATA ELEMENT</u>				
SPACE SPECIFIC TYPE	X#	##	##	X#
AIR SPECIFIC TYPE	X#	##	##	X#
SURFACE (MARITIME) SPECIFIC TYPE	X#	##	##	X#
SUBSURFACE (MARITIME) SPECIFIC TYPE	X#	##	##	X#
LAND (GROUND) SPECIFIC TYPE	X#	##	##	X#

MIL-STD-6016B

APPENDIX A

TABLE A.5-J7.0-3. Data Level Minimum Implementation by Action, Track Management Value (Sheet 2 of 2)

J7.0I DATA ELEMENT	ACTION, TRACK MANAGEMENT VALUE			
	4	5	6	7
EXERCISE INDICATOR	N22N	N22N	N22N	T10R
CONTROLLING UNIT INDICATOR	N22N	#22R	N22N	
TRACK NUMBER, REFERENCE	TR	TR	NN	
STRENGTH	NN	TR	NN	
ALERT STATUS CHANGE	TR	N22N	N22N	
SPACE PLATFORM	NN	NN	NN	
AIR PLATFORM	NN	NN	NN	
SURFACE (MARITIME) PLATFORM	NN	NN	NN	
SUBSURFACE (MARITIME) PLATFORM	NN	NN	NN	
LAND (GROUND) PLATFORM	NN	NN	NN	
SPACE PLATFORM ACTIVITY	NN	NN	NN	
AIR PLATFORM ACTIVITY	NN	NN	NN	
SURFACE (MARITIME) PLATFORM ACTIVITY	NN	NN	NN	
SUBSURFACE (MARITIME) PLATFORM ACTIVITY	NN	NN	NN	
LAND (GROUND) PLATFORM ACTIVITY	NN	NN	NN	
ENVIRONMENT/CATEGORY	NN	NN	NN	
IDENTITY CONFIDENCE	N22N	N22N	N22N	
IDENTITY	N22N	N22N	N22N	
IDENTITY AMPLIFYING DESCRIPTOR	N22N	N22N	N22N	
SPECIAL INTEREST INDICATOR	NN	NN	NN	
J7.0E0 DATA ELEMENT				
STRENGTH, TOTAL NUMBER OF VEHICLES	X#	TR	X#	
STRENGTH, PERCENT OF TRACKED VEHICLES	X#	TR	X#	
J7.0C1 DATA ELEMENT				
SPACE SPECIFIC TYPE	X#	X#	X#	
AIR SPECIFIC TYPE	X#	X#	X#	
SURFACE (MARITIME) SPECIFIC TYPE	X#	X#	X#	
SUBSURFACE (MARITIME) SPECIFIC TYPE	X#	X#	X#	
LAND (GROUND) SPECIFIC TYPE	X#	X#	X#	

APPENDIX A

J7.1 Word, Data Element, and Data Item MInimum Implementation

To determine the words, data elements, and data items in the J7.1 message that are required for implementation, first, enter Table A.5-J7.1-1 from the left to determine the implementation requirements for each action value. Next, enter Table A.5-J7.1-2 from the left at an action value that will be implemented. Proceed across the row to determine the required word implementation. Then, enter Table A.5-J7.1-3 from the top at an action value that will be implemented. Proceed down the column to determine the required data element implementation for each word. At each level, the transmit and receive requirements are considered separately, with no interaction between them.

MIL-STD-6016B

APPENDIX A

TABLE A.5-J7.1-1. Action, Data Update Request Value Minimum Implementation for the J7.1 Message

ACTION, DATA UPDATE REQUEST VALUE	MIN IMP	
	C ² JU	NONC ² JU
0 - DATA UPDATE REQUEST BY REQUEST INDICATOR	##	##
1 - DATA UPDATE REQUEST BY TRACK NUMBER	TR	##
2 - BALLISTIC MISSILE UPDATE REQUEST	##102	##
3-7 - UNDEFINED	XX	XX

TABLE A.5-J7.1-2. Word Level Minimum Implementation by Action, Data Update Request Value

ACTION, DATA UPDATE REQUEST VALUE	J7.1 WORDS	
	J7.1I	J7.1C1
0 - DATA UPDATE REQUEST BY REQUEST INDICATOR	TR	#R
1 - DATA UPDATE REQUEST BY TRACK NUMBER	TR	#R
2 - BALLISTIC MISSILE UPDATE REQUEST	TR	#R
3-7 - UNDEFINED	XX	XX

TABLE A.5-J7.1-3. Data Element Level Minimum Implementation by Action, Data Update Request Value

J7.1I DATA ELEMENT	ACTION, DATA UPDATE REQUEST VALUE			
	0	1	2	3-7
TRACK NUMBER, REFERENCE	NN	TR	TR	XX
REFERENCE POINT DATA REQUEST INDICATOR	##	NN	NN	XX
ELECTRONIC ATTACK DATA REQUEST INDICATOR	##	NN	NN	XX
ELECTRONIC WARFARE FIXES DATA REQUEST INDICATOR	##	NN	NN	XX
WEAPON STATUS DATA REQUEST INDICATOR	##	NN	NN	XX
WEATHER DATA REQUEST INDICATOR	##	NN	NN	XX
AMPLIFICATION DATA REQUEST INDICATOR	##	NN	NN	XX
FILTER DATA REQUEST INDICATOR	##	NN	NN	XX
FILTER NUMBER	##	NN	NN	XX
NUMBER/FREQUENCY OF UPDATES	NN	NN	TR	XX
COVARIANCE INDICATOR	N22N22	N22N22	TR	XX
TRACK NUMBER, ADDRESSEE 1	TR	TR	TR	XX
J7.1C1 DATA ELEMENT				
TRACK NUMBER, ADDRESSEE 2	TR	TR	TR	XX
TRACK NUMBER, ADDRESSEE 3	#R	#R	#R	XX
TRACK NUMBER, ADDRESSEE 4	#R	#R	#R	XX
TRACK NUMBER, ADDRESSEE 5	#R	#R	#R	XX

APPENDIX A

TABLE A.5-J7.2. Word, Data Element, and Data Item Minimum Implementation

WORD LEVEL

<u>WORD</u>	<u>MIN IMP</u>
J7.2I	TR

DATA ELEMENT LEVEL

<u>J7.2I</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
ACTION, CORRELATE	TR
RESPONSE VALUE	T113R113
TRACK NUMBER, RETAINED	TR
TRACK NUMBER, DROPPED	TR

APPENDIX A

TABLE A.5-J7.3. Word, Data Element, and Data Item Minimum Implementation
(Sheet 1 of 2)

WORD LEVEL

<u>WORD</u>	<u>MIN IMP</u>
J7.3I	TR
J7.3C1	#R
J7.3C2	##
J7.3C3	##

DATA ELEMENT LEVEL

<u>J7.3I</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
ACTION, POINTER	##
TEXT INDICATOR	#107#107
LATITUDE, 0.0412 MINUTE	TR
LONGITUDE, 0.0412 MINUTE	TR
TRACK NUMBER, ADDRESSEE 1	TR

<u>J7.3C1</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
TRACK NUMBER, ADDRESSEE 2	TR
TRACK NUMBER, ADDRESSEE 3	#R
TRACK NUMBER, ADDRESSEE 4	#R
TRACK NUMBER, ADDRESSEE 5	#R

<u>J7.3C2</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
CHARACTER #1	TR
CHARACTER #2	TR
CHARACTER #3	TR
CHARACTER #4	TR
CHARACTER #5	TR
CHARACTER #6	TR
CHARACTER #7	TR
CHARACTER #8	TR
CHARACTER #9	TR
CHARACTER #10	TR

<u>J7.3C3</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
CHARACTER #11	TR
CHARACTER #12	TR
CHARACTER #13	TR
CHARACTER #14	TR
CHARACTER #15	TR

APPENDIX A

TABLE A.5-J7.3. Word, Data Element, and Data Item Minimum Implementation
(Sheet 2 of 2)

DATA ELEMENT LEVEL (continued)

<u>J7.3C3 (continued)</u>	
<u>DATA ELEMENT</u>	<u>MIN IMP</u>
CHARACTER #16	TR
CHARACTER #17	TR
CHARACTER #18	TR
CHARACTER #19	TR
CHARACTER #20	TR

MIL-STD-6016B

APPENDIX A

THIS PAGE INTENTIONALLY LEFT BLANK

APPENDIX A

TABLE A.5-J7.4. Word, Data Element, and Data Item Minimum Implementation

WORD LEVEL

<u>WORD</u>	<u>MIN IMP</u>
J7.4I	TR
J7.4E0	T30R30

DATA ELEMENT LEVEL

<u>J7.4I</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
TRACK NUMBER, REPORT/REQUEST	TR
LINK 11/LINK 11B TRACK NUMBER	T28R28
APPLICABILITY	
NATO LINK 1 TRACK NUMBER	T26R26
APPLICABILITY	
ATDL-1 TRACK NUMBER APPLICABILITY	T27R27
IJMS, SYSTEM REFERENCE NUMBER	T29R29
APPLICABILITY	
TRACK NUMBER, REFERENCE	TR
LINK 11/LINK 11B TRACK NUMBER	##
NATO LINK 1 TRACK NUMBER	##
<u>J7.4E0</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
ATDL-1 TRACK NUMBER	T32R32
IJMS, SYSTEM REFERENCE NUMBER	T32R32

MIL-STD-6016B

APPENDIX A

THIS PAGE INTENTIONALLY LEFT BLANK

APPENDIX A

J7.5 Word, Data Element, and Data Item Minimum Implentation

To Determine the words, data elements, an data items in the J7.5 message that are required for implementation, first, enter Table A.5-J7.5-1 from the left to determine the implementation requirements for each action value. Next, enter Table A.5-J7.5-2 from the left at an action value that will be implemented. Proceed across the row to determine the required word implementation. Then, enter Table A.5-J7.5-3 from the top at an action value that will be implemented. Proceed down the column to determine the required date element implementation. At each level, the transmit and receive requirements are considered separately, with no interaction between them.

MIL-STD-6016B

APPENDIX A

TABLE A.5-J7.5-1. Action, IFF/SIF Management Value Minimum Implementation for the J7.5 Message

ACTION, IFF/SIF MANAGEMENT VALUE	MIN IMP
0 - CLEAR IFF/SIF	TR
1 - IFF/SIF DIFFERENCE REPORT	TR
2 - IFF/SIF UPDATE REQUEST	#R
3 - SPECIAL CODE	##
4-7 - UNDEFINED	XX

TABLE A.5-J7.5-2. Word Level Minimum Implementation by Action, IFF/SIF Management

ACTION, IFF/SIF MANAGEMENT VALUE	J7.5 WORDS
	J7.5I
0 - CLEAR IFF/SIF	TR
1 - IFF/SIF DIFFERENCE REPORT	TR
2 - IFF/SIF UPDATE REQUEST	TR
3 - SPECIAL CODE	TR
4-7 - UNDEFINED	XX

TABLE A.5-J7.5-3. Data Element Level Minimum Implementation by Action, IFF/SIF Management Value

J7.5I DATA ELEMENT	ACTION, IFF/SIF MANAGEMENT VALUE				
	0	1	2	3	4-7
MODE IV INDICATOR APPLICABILITY	TR	T33R33	#22R	N22N	XX
MODE IV INDICATOR	NN	TR	#R	NN	XX
TRACK NUMBER, REFERENCE	TR	TR	TR	TR	XX
MODE I CODE APPLICABILITY	TR	T33R	#22R	XX	XX
SPECIAL CODE I APPLICABILITY	XX	XX	XX	T33R	XX
MODE II CODE APPLICABILITY	TR	T33R	#22R	XX	XX
SPECIAL CODE II APPLICABILITY	XX	XX	XX	T33R	XX
MODE III CODE APPLICABILITY	TR	T33R	#22R	XX	XX
SPECIAL CODE III APPLICABILITY	XX	XX	XX	T33R	XX
MODE I CODE	N22N	TR	N22N	XX	XX
SPECIAL CODE I	XX	XX	XX	#22R	XX
MODE II CODE	N22N	TR	N22N	XX	XX
SPECIAL CODE II	XX	XX	XX	#22R	XX
MODE III CODE	N22N	TR	N22N	XX	XX
SPECIAL CODE III	XX	XX	XX	#22R	XX

APPENDIX A

J7.6 Word, Data Element, and Data Item Minimum Implementation

To determine the words, data elements, and data items in the J7.6 message that are required for implementation, first, enter Table A.5-J7.6-1 from the left to determine the implementation requirements for each action value. Next, enter Table A.5-J7.6-2 from the left at an action value that will be implemented. Proceed across the row to determine the required word implementation. Then, enter Table A.5-J7.6-3 from the top at an action value that will be implemented. Proceed down the column to determine the required data element implementation for each word. At each level, the transmit and receive requirements are considered separately, with no interaction between them.

MIL-STD-6016B

APPENDIX A

TABLE A.5-J7.6-1. Action, Filter Management Minimum Implementation for the J7.6 Message

ACTION, FILTER MANAGEMENT VALUE	MIN IMP	
	C ² JU	NONC ² JU (NEEDLINE ONLY)
0 - FILTER IMPLEMENTATION REQUEST	#R	XR
1 - FILTER DESCRIPTION REPORT	#R	##
2 - DELETE FILTER REQUEST/ REPORT	#R	##
3-7 - UNDEFINED	XX	XX

TABLE A.5-J7.6-2. Word Element Minimum Implementation by Action, Filter Management Value

ACTION, FILTER MANAGEMENT VALUE	J7.6 WORDS				
	J7.6I	J7.6E0	J7.6C1	J7.6C2	J7.6C3
0 - FILTER IMPLEMENTATION REQUEST	TR	#R	#R	#R	#R
1 - FILTER DESCRIPTION REPORT	TR	#R	#R	#R	#R
2 - DELETE FILTER REQUEST/ REPORT	TR	X#	X#	X#	X#
3-7 - UNDEFINED	XX	XX	XX	XX	XX

MIL-STD-6016B

APPENDIX A

TABLE A.5-J7.6-3. Data Element Level Minimum Implementation by Action, Filter Management Value (Sheet 1 of 2)

J7.6I DATA ELEMENT	ACTION, FILTER MANAGEMENT VALUE			
	0	1	2	3-7
TRACK NUMBER, ADDRESSEE	TR	TR	TR	XX
ENV/CAT UNKNOWN FILTER INDICATOR	#22#	#22#	#22#	XX
ENV/CAT SPACE FILTER INDICATOR	#22#	#22#	#22#	XX
ENV/CAT AIR FILTER INDICATOR	#22#	#22#	#22#	XX
ENV/CAT SURFACE (MARITIME) FILTER INDICATOR	#22#	#22#	#22#	XX
ENV/CAT SUBSURFACE (MARITIME) FILTER INDICATOR	#22#	#22#	#22#	XX
ENV/CAT LAND (GROUND) POINT FILTER INDICATOR	#22#	#22#	#22#	XX
ENV/CAT LAND (GROUND) TRACK FILTER INDICATOR	#22#	#22#	#22#	XX
SPARE ENV/CAT FILTER INDICATOR	#22#	#22#	#22#	XX
SPECIAL PROCESSING FILTER INDICATOR	#22#	#22#	#22#	XX
SIMULATION FILTER INDICATOR	#22#	#22#	#22#	XX
REFERENCE POINT FILTER INDICATOR	#22#	#22#	#22#	XX
ELECTRONIC WARFARE FILTER INDICATOR	#22#	#22#	#22#	XX
LINE/AREA CONTINUATION INDICATOR, 1	##	##	##	XX
FILTER UNIT TYPE	TR	TR	#22#	XX
SLAVED INDICATOR	TR	TR	#22#	XX
PENDING IDENTITY FILTER INDICATOR	#22#	#22#	#22#	XX
UNKNOWN IDENTITY FILTER INDICATOR	#22#	#22#	#22#	XX
ASSUMED FRIEND IDENTITY FILTER INDICATOR	#22#	#22#	#22#	XX
FRIEND IDENTITY FILTER INDICATOR	#22#	#22#	#22#	XX
NEUTRAL IDENTITY FILTER INDICATOR	#22#	#22#	#22#	XX
SUSPECT IDENTITY FILTER INDICATOR	#22#	#22#	#22#	XX
HOSTILE IDENTITY FILTER INDICATOR	#22#	#22#	#22#	XX
SPARE IDENTITY FILTER INDICATOR	#22#	#22#	#22#	XX
FILTER NUMBER	TR	TR	TR	XX
GEOGRAPHIC AREA FILTERED	##	##	##	XX
J7.6E0 DATA ELEMENT				
LATITUDE, 0.0103 MINUTE	##	##	X#	XX
LONGITUDE, 0.0103 MINUTE	##	##	X#	XX
ALTITUDE, 100 FT 1	#R	#R	X#	XX
ALTITUDE, 100 FT 2	#R	#R	X#	XX
J7.6C1 DATA ELEMENT				
BEARING, 1	##	##	X#	XX
BEARING, 2	##	##	X#	XX
SQUARE/CIRCLE SWITCH, 1	##	##	X#	XX
AXIS ORIENTATION, 1	##	##	X#	XX
AREA MAJOR AXIS, 1	##	##	X#	XX
AREA MINOR AXIS, 1	##	##	X#	XX
SQUARE/CIRCLE SWITCH, 2	##	##	X#	XX
AXIS ORIENTATION, 2	##	##	X#	XX
AREA MAJOR AXIS, 2	##	##	X#	XX

MIL-STD-6016B

APPENDIX A

TABLE A.5-J7.6-3. Data Element Level Minimum Implementation by Action,
Filter Management Value (Sheet 2 of 2)

<u>J7.6C1(continued)</u> <u>DATA ELEMENT</u>	ACTION, FILTER MANAGEMENT VALUE			
	0	1	2	3-7
AREA MINOR AXIS, 2	##	##	X#	XX
<u>J7.6C2</u> <u>DATA ELEMENT</u>				
DELTA LATITUDE, 0.0313 MINUTE 1	##	##	X#	XX
DELTA LONGITUDE, 0.0313 MINUTE 1	##	##	X#	XX
END POINT, 1	##	##	X#	XX
DELTA LATITUDE, 0.0313 MINUTE 2	##	##	X#	XX
DELTA LONGITUDE, 0.0313 MINUTE 2	##	##	X#	XX
END POINT, 2	##	##	X#	XX
<u>J7.6C3</u> <u>DATA ELEMENT</u>				
TRACK NUMBER, RELATED	TR	TR	X#	XX
COURSE	TR	TR	X#	XX
SPEED	TR	TR	X#	XX

APPENDIX A

TABLE A.5-J7.7. Word, Data Element, and Data Item Minimum Implementation

WORD LEVEL

<u>WORD</u>	<u>MIN IMP</u>
J7.7I	TR

DATA ELEMENT LEVEL

<u>J7.7I</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
ACTION, ASSOCIATION	TR
TRACK NUMBER, SUBJECT	TR
TRACK NUMBER, ASSOCIATED	TR

MIL-STD-6016B

APPENDIX A

THIS PAGE INTENTIONALLY LEFT BLANK

APPENDIX A

TABLE A.5-J8.0. Word, Data Element, and Data Item Minimum Implementation

WORD LEVEL

<u>WORD</u>	<u>MIN IMP</u>
J8.0I	TR
J8.0E0	TR

DATA ELEMENT LEVEL

<u>J8.0I</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
TRACK NUMBER, ADDRESSEE	TR
ASSIGN/DEASSIGN UNIT DESIGNATOR	TR
RECEIPT/COMPLIANCE	TR
RECURRENCE RATE, RECEIPT/COMPLIANCE	TR
<u>J8.0E0</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
UNIT DESIGNATOR	TR
TRACK NUMBER, REFERENCE	TR

APPENDIX A

TABLE A.5-J8.1. Word, Data Element, and Data Item Minimum Implementation

WORD LEVEL

<u>WORD</u>	<u>MIN IMP</u>
J8.1I	TR

DATA ELEMENT LEVEL

<u>J8.1I</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
TRACK NUMBER, ADDRESSEE	T#		XR
MISSION CORRELATOR CHANGE	T#		XR
MISSION CORRELATOR	T#		XR
MISSION CORRELATOR, NEW	T#		XR

APPENDIX A

J9.0 Word, Data Element, and Data Item Minimum Implementation

To determine the words, data elements, and data items in the J9.0 message that are required for implementation, first, enter Table A.5-J9.0-1 from the top at a Mission Category that will be implemented to determine the implementation requirements for each action value. Next, enter Table A.5-J9.0-2 from the left at an action value that will be implemented. Proceed across the row to determine the required word implementation. Then, enter Table A.5-J9.0-3 from the top at an action value that will be implemented. Proceed down the column to determine the required data element implementation for each word. At each level, the transmit and receive requirements are considered separately, with no interaction between them.

MIL-STD-6016B

APPENDIX A

TABLE A.5-J9.0-1. Command Value Minimum Implementation by Mission Category

COMMAND VALUE	MISSION CATEGORIES					
	ATC	AIC	ASO	MSL/RPV	SAM UNIT CONT	EW
0 - WEAPONS FREE	X#	T10R	T10R	T10R	T10R	X#
1 - WEAPONS TIGHT	X#	T10R	T10R	T10R	T10R	X#
2 - ENGAGE	X#	T10R	##	T10R	T10R	X#
3 - ASSIGN	X#	T10R	##	##	##	X#
4 - CEASE ENGAGE	X#	T10R	##	T10R	T10R	X#
5 - HOLD FIRE	X#	T10R	##	##	T10R	X#
6 - CEASE FIRE	X#	T97R	##	##	T97R	X#
7 - COVER	X#	T10R	##	X#	T10R	X#
8 - SALVO/CLEAR AIRCRAFT	T10R	T10R	T10R	##	##	X#
9 - ASSUME CONTROL	##	##	##	##	##	##
10 - ATTACK	X#	X#	T10R	T10R	X#	X#
11 - CEASE ATTACK	X#	X#	T10R	T10R	X#	X#
12-13 - DISUSED	XX	XX	XX	XX	XX	XX
14 - PROCEED TO POINT	X#	##	##	##	X#	X#
15 - CEASE PROCEEDING TO POINT	X#	##	##	##	X#	X#
16 - CONDUCT PROCEDURES INDICATED	X#	##	##	##	X#	X#
17 - CEASE CONDUCTING PROCEDURES INDICATED	X#	##	##	##	X#	X#
18 - ASSUME DUTIES INDICATED	X#	##	##	##	X#	X#
19 - CEASE DUTIES INDICATED	X#	##	##	##	X#	X#
20 - TRANSFER CONTROL	##	##	##	##	##	##
21 - RETURN TO BASE	##	##	##	##	X#	X#
22 - LAUNCH ALERT AIRCRAFT	##	##	##	##	X#	X#
23 - INVESTIGATE/INTERROGATE	X#	##	##	##	X#	X#
24 - INTERVENE	X#	##	##	##	X#	X#
25 - SHADOW	X#	##	##	X#	X#	X#
26 - UNDEFINED	XX	XX	XX	XX	XX	XX
27 - ENGAGE TN OBJECTIVE WITH SPECIFIED NUMBER OF ASM/SSM TO MEET IMPACT TIME INDICATED	X#	X#	##	##	X#	X#
28 - PRIORITY KILL	X#	X#	##	##	##	X#
29-31 - UNDEFINED	XX	XX	XX	XX	XX	XX

MIL-STD-6016B

APPENDIX A

TABLE A.5-J9.0-2. Word Level Minimum Implementation by Command Value

COMMAND VALUE	J9.0 WORDS			
	J9.0I	J9.0E0	J9.0C1	J9.0C2
0 - WEAPONS FREE	TR	##	X#	XX
1 - WEAPONS TIGHT	TR	##	X#	XX
2 - ENGAGE	TR	TR	##	XX
3 - ASSIGN	TR	TR	##	XX
4 - CEASE ENGAGE	TR	TR	X#	XX
5 - HOLD FIRE	TR	##	X#	XX
6 - CEASE FIRE	TR	##	X#	XX
7 - COVER	TR	##	X#	XX
8 - SALVO/CLEAR AIRCRAFT	TR	TR	X#	XX
9 - ASSUME CONTROL	TR	TR	X#	XX
10 - ATTACK	TR	TR	X#	XX
11 - CEASE ATTACK	TR	TR	X#	XX
12-13 - DISUSED	XX	XX	XX	XX
14 - PROCEED TO POINT	TR	TR	X#	XX
15 - CEASE PROCEEDING TO POINT	TR	TR	X#	XX
16 - CONDUCT PROCEDURES INDICATED	TR	TR	X#	XX
17 - CEASE CONDUCTING PROCEDURES INDICATED	TR	TR	X#	XX
18 - ASSUME DUTIES INDICATED	TR	TR	X#	XX
19 - CEASE DUTIES INDICATED	TR	TR	X#	XX
20 - TRANSFER CONTROL	TR	TR	X#	XX
21 - RETURN TO BASE	TR	TR	##	XX
22 - LAUNCH ALERT AIRCRAFT	TR	TR	##	XX
23 - INVESTIGATE/INTERROGATE	TR	TR	X#	XX
24 - INTERVENE	TR	TR	X#	XX
25 - SHADOW	TR	TR	X#	XX
26 - UNDEFINED	XX	XX	XX	XX
27 - ENGAGE TN OBJECTIVE WITH SPECIFIED NUMBER OF ASM/ SSM TO MEET IMPACT TIME INDICATED	TR	TR	X#	TR
28 - PRIORITY KILL	TR	TR	X#	XX
29-31 - UNDEFINED	XX	XX	XX	XX

TABLE A.5-J9.0-3. Data Element Level Minimum Implementation by Command Value Action (Sheet 1 of 3)

J9.0I DATA ELEMENT	COMMAND VALUE									
	0	1	2	3	4	5	6	7	8	9
TRACK NUMBER, ADDRESSEE	TR	TR	TR	TR	TR	TR	TR	TR	TR	TR
THREAT WARNING CONDITION	##	##	##	##	##	##	##	##	##	##
WEAPON TYPE	#22#	#22#	#22#	#22#	#22#	#22#	#22#	#22#	#22#	#22#
TRACK NUMBER, OBJECTIVE	NN	NN	TR	TR	TR	TR	TR	TR	TR	TR
EXERCISE INDICATOR	#55R55	#55R55	#55R55	#55R55	#55R55	#55R55	#55R55	#55R55	#55R55	#55R55
RECEIPT/COMPLIANCE	TR	TR	TR	TR	TR	TR	TR	TR	TR	TR
RECURRENCE RATE, RECEIPT/ COMPLIANCE	TR	TR	TR	TR	TR	TR	TR	TR	TR	TR
J9.0E0 DATA ELEMENT										
DUTY ASSIGNMENT	NN	NN	NN	NN	NN	NN	NN	NN	NN	NN
COMMAND MISSION	NN	NN	NN	NN	NN	NN	NN	NN	NN	NN
NUMBER OF AIRCRAFT	#35#	#35#	#35#	#35#	#35#	#35#	#35#	#35#	#35#	#35#
THREAT WARNING ENVIRONMENT	##	##	##	##	##	##	##	##	##	##
DUTY ASSIGNMENT FUNCTIONAL AREA	NN	NN	NN	NN	NN	NN	NN	NN	NN	NN
SPARE	##	##	TR	TR	TR	##	##	##	TR	TR
J9.0C1 DATA ELEMENT										
VOICE CALL SIGN	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
VOICE FREQUENCY/CHANNEL	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
CONTROL CHANNEL	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
SECURE RADIO INDICATOR	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
VOICE FREQUENCY/CHANNEL INDICATOR	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
METHOD OF FIRE	##	##	##	##	NN	NN	NN	NN	NN	NN
J9.0C2 DATA ELEMENT										
HOUR	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
MINUTE	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
SECOND	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
NUMBER OF MISSILES	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX

TABLE A.5-J9.0-3. Data Element Level Minimum Implementation by Command Value Action (Sheet 2 of 3)

J9.0I DATA ELEMENT	COMMAND VALUE									
	10	11	12-13	14	15	16	17	18	19	20
TRACK NUMBER, ADDRESSEE	TR	TR	XX	TR	TR	TR	TR	TR	TR	TR
THREAT WARNING CONDITION	##	##	XX	##	##	##	##	##	##	##
WEAPON TYPE	#22#	#22#	XX	#22#	#22#	#22#	#22#	#22#	#22#	#22#
TRACK NUMBER, OBJECTIVE	TR	TR	XX	TR	TR	##	##	##	##	TR
EXERCISE INDICATOR	#55R55	#55R55	XX	#55R55	#55R55	#55R55	#55R55	#55R55	#55R55	#55R55
RECEIPT/COMPLIANCE	TR	TR	XX	TR	TR	TR	TR	TR	TR	TR
RECURRENCE RATE, RECEIPT/ COMPLIANCE	TR	TR	XX	TR	TR	TR	TR	TR	TR	TR
J9.0E0 DATA ELEMENT										
DUTY ASSIGNMENT	NN	NN	XX	NN	NN	NN	NN	TR	TR	NN
COMMAND MISSION	NN	NN	XX	NN	NN	TR	TR	NN	NN	NN
NUMBER OF AIRCRAFT	#35#	#35#	XX	#35#	#35#	#35#	#35#	#35#	#35#	#35#
THREAT WARNING ENVIRONMENT	##	##	XX	##	##	##	##	##	##	##
DUTY ASSIGNMENT FUNCTIONAL AREA	NN	NN	XX	NN	NN	NN	NN	TR	TR	NN
SPARE	TR	TR	XX	TR	TR	TR	TR	TR	TR	TR
J9.0C1 DATA ELEMENT										
VOICE CALL SIGN	X#	X#	XX	X#	X#	X#	X#	X#	X#	X#
VOICE FREQUENCY/CHANNEL	X#	X#	XX	X#	X#	X#	X#	X#	X#	X#
CONTROL CHANNEL	X#	X#	XX	X#	X#	X#	X#	X#	X#	X#
SECURE RADIO INDICATOR	X#	X#	XX	X#	X#	X#	X#	X#	X#	X#
VOICE FREQUENCY/CHANNEL INDICATOR	X#	X#	XX	X#	X#	X#	X#	X#	X#	X#
METHOD OF FIRE	XX	XX	XX	NN	NN	NN	NN	NN	NN	NN
J9.0C2 DATA ELEMENT										
HOUR	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
MINUTE	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
SECOND	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
NUMBER OF MISSILES	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX

TABLE A.5-J9.0-3. Data Element Level Minimum Implementation by Command Value Action (Sheet 3 of 3)

J9.0I DATA ELEMENT	COMMAND VALUE								
	21	22	23	24	25	26	27	28	29-31
TRACK NUMBER, ADDRESSEE	TR	TR	TR	TR	TR	XX	TR	TR	XX
THREAT WARNING CONDITION	##	##	##	##	##	XX	##	##	XX
WEAPON TYPE	#22#	#22#	#22#	#22#	#22#	XX	#22#	#22#	XX
TRACK NUMBER, OBJECTIVE	##	TR	TR	TR	TR	XX	TR	TR	XX
EXERCISE INDICATOR	#55R55	#55R55	#55R55	#55R55	#55R55	XX	#55R55	#55R55	XX
RECEIPT/COMPLIANCE	TR	TR	TR	TR	TR	XX	TR	TR	XX
RECURRENCE RATE, RECEIPT/ COMPLIANCE	TR	TR	TR	TR	TR	XX	TR	TR	XX
J9.0E0 DATA ELEMENT									
DUTY ASSIGNMENT	NN	NN	NN	NN	NN	XX	NN	NN	XX
COMMAND MISSION	NN	NN	NN	NN	NN	XX	NN	NN	XX
NUMBER OF AIRCRAFT	#35#	#35#	#35#	#35#	#35#	XX	#35#	#35#	XX
THREAT WARNING ENVIRONMENT	##	##	##	##	##	XX	##	##	XX
DUTY ASSIGNMENT FUNCTIONAL AREA	NN	NN	NN	NN	NN	XX	NN	NN	XX
SPARE	TR	TR	TR	TR	TR	XX	TR	TR	XX
J9.0C1 DATA ELEMENT									
VOICE CALL SIGN	#22#	#22#	X#	X#	X#	XX	X#	X#	XX
VOICE FREQUENCY/CHANNEL	##	##	X#	X#	X#	XX	X#	X#	XX
CONTROL CHANNEL	##	##	X#	X#	X#	XX	X#	X#	XX
SECURE RADIO INDICATOR	##	##	X#	X#	X#	XX	X#	X#	XX
VOICE FREQUENCY/CHANNEL INDICATOR	#22#	#22#	X#	X#	X#	XX	X#	X#	XX
METHOD OF FIRE	NN	NN	NN	NN	NN	XX	XX	XX	XX
J9.0C2 DATA ELEMENT									
HOURL	XX	XX	XX	XX	XX	XX	TR	XX	XX
MINUTE	XX	XX	XX	XX	XX	XX	TR	XX	XX
SECOND	XX	XX	XX	XX	XX	XX	TR	XX	XX
NUMBER OF MISSILES	XX	XX	XX	XX	XX	XX	TR	XX	XX

APPENDIX A

J9.1 Word, Data Element, and Data Item Minimum Implementation

To determine the word, data elements and data items in the J9.1 message that are required for implementation, first, enter Table A.5-J9.1-1 from the left to determine the required implementation for each action value. Next enter Table A.5-J9.1-2 from the left at an action value that will be implemented. Proceed across the row to determine the required word implementation. Then, enter Table A.5-J9.1-3 from the top at an action value that will be implemented. Proceed down the column to determine the required data element implementation.

MIL-STD-6016B

APPENDIX A

TABLE A.5-J9.1-1. Engagement Coordination Action Value Minimum Implementation for the J9.1 Message

ENGAGEMENT COORDINATION ACTION VALUE	MIN IMP	
	C ² JU	NONC ² JU
0 - INTEND TO ENGAGE	##	X#
1 - DO NOT INTEND TO ENGAGE	##	X#
2 - AVAILABLE FOR SUPPORT	TR	X#
3 - NOT AVAILABLE FOR SUPPORT	TR	X#
4 - SUPPORT EXPECTED	TR	X#
5 - SUPPORT NOT EXPECTED	TR	X#
6-15 - UNDEFINED	XX	XX

TABLE A.5-J9.1-2. Word Level Minimum Implementation by Engagement Coordination Action Value

ENGAGEMENT COORDINATION ACTION VALUE	J9.1 WORDS	
	J9.1I	
	C ² JU	NONC ² JU
0 - INTEND TO ENGAGE	TR	XR
1 - DO NOT INTEND TO ENGAGE	TR	XR
2 - AVAILABLE FOR SUPPORT	TR	XR
3 - NOT AVAILABLE FOR SUPPORT	TR	XR
4 - SUPPORT EXPECTED	TR	XR
5 - SUPPORT NOT EXPECTED	TR	XR
6-15 - UNDEFINED	XX	XX

TABLE A.5-J9.1-3. Data Element Level Minimum Implementation by Engagement Coordination Action (Sheet 1 of 3)

J9.1I DATA ELEMENT	ENGAGEMENT COORDINATION ACTION VALUE			
	0		1	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU
TRACK NUMBER, ADDRESSEE	TR	XR	TR	XR
TRACK NUMBER, OBJECTIVE	TR	XR	TR	XR
METHOD OF FIRE	T52R52	XR52	##	X#
ENGAGEMENT COORDINATION ACTION VALUE	TR	XR	TR	XR
PROBABILITY OF KILL	T52R52	XR52	##	X#
TRACKING STATUS	T52R52	XR52	##	X#
RECEIPT/COMPLIANCE	TR	XR	TR	XR
RECURRENCE RATE, RECEIPT/COMPLIANCE	TR	XR	TR	XR

APPENDIX A

TABLE A.5-J9.1-3. Data Element Level Minimum Implementation by Engagement Coordination Action (Sheet 2 of 3)

<u>J9.1I</u> <u>DATA ELEMENT</u>	ENGAGEMENT COORDINATION ACTION VALUE			
	2		3	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU
TRACK NUMBER, ADDRESSEE	TR	XR	TR	XR
TRACK NUMBER, OBJECTIVE	TR	XR	TR	XR
METHOD OF FIRE	T52R52	XR52	##	X#
ENGAGEMENT COORDINATION ACTION VALUE	TR	XR	TR	XR
PROBABILITY OF KILL	T52R52	XR52	##	X#
TRACKING STATUS	T52R52	XR52	##	X#
RECEIPT/COMPLIANCE	TR	XR	TR	XR
RECURRENCE RATE, RECEIPT/COMPLIANCE	TR	XR	TR	XR

MIL-STD-6016B

APPENDIX A

TABLE A.5-J9.1-3. Data Element Level Minimum Implementation by Engagement Coordination Action (Sheet 3 of 3)

J9.1I DATA ELEMENT	ENGAGEMENT COORDINATION ACTION VALUE			
	4		5	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU
TRACK NUMBER, ADDRESSEE	TR	XR	TR	XR
TRACK NUMBER, OBJECTIVE	TR	XR	TR	XR
METHOD OF FIRE	TR	XR	T52R52	XR52
ENGAGEMENT COORDINATION ACTION VALUE	TR	XR	TR	XR
PROBABILITY OF KILL	T52R52	XR52	T52R52	XR52
TRACKING STATUS	T52R52	XR52	T52R52	XR52
RECEIPT/COMPLIANCE	TR	XR	TR	XR
RECURRENCE RATE, RECEIPT/COMPLIANCE	TR	XR	TR	XR

J9.1I DATA ELEMENT	ENGAGEMENT COORDINATION ACTION VALUE	
	6-15	
	C ² JU	NONC ² JU
TRACK NUMBER, ADDRESSEE	XX	XX
TRACK NUMBER, OBJECTIVE	XX	XX
METHOD OF FIRE	XX	XX
ENGAGEMENT COORDINATION ACTION VALUE	XX	XX
PROBABILITY OF KILL	XX	XX
TRACKING STATUS	XX	XX
RECEIPT/COMPLIANCE	XX	XX
RECURRENCE RATE, RECEIPT/COMPLIANCE	XX	XX

APPENDIX A

J10.2 Word, Data Element, and Data Item Minimum Implementation

To determine the words, data elements, and data items in the J10.2 message that are required for implementation, first, enter Table A.5-J10.2-1 from the top at a Mission Category that will be implemented to determine the implementation requirements for C² JUs and nonC² JUs for each action value. Next, enter Table A.5-J10.2-2 from the left at an action value that will be implemented. Proceed across the row to determine the required word implementation. Then, enter Table A.5-J10.2-3 from the top at an action value that will be implemented. Proceed down the column to determine the required data element implementation for each word. At each level, the transmit and receive requirements are considered separately, with no interaction between them.

TABLE A.5-J10.2-1. Weapon Engagement Status Value Minimum Implementation by Mission Category (Sheet 1 of 2)

WEAPON ENGAGEMENT STATUS VALUE	MISSION CATEGORIES					
	ATC		AIC		ASO	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
0 - NO STATEMENT	X#	X#	X#	X#	X#	X#
1 - RECOMMEND REATTACK	X#	X#	X#	X#	TR	XR
2 - WEAPON ASSIGNED	X#	X#	TR	XR	##	X#
3 - TRACKING/LOCKED ON/READY TO FIRE/BIRD AFFIRM	X#	X#	TR	XR	##	X#
4 - FIRING/MISSILE IN FLIGHT/ENGAGING TO DESTROY	X#	X#	TR	XR	##	X#
5 - EFFECTIVE/TARGET DESTROYED/GRAND SLAM	X#	X#	TR	XR	##	X#
6 - PARTIALLY EFFECTIVE	X#	X#	##	X#	##	X#
7 - NOT EFFECTIVE	X#	X#	##	X#	##	X#
8 - ENGAGEMENT BROKEN	X#	X#	TR	XR	##	X#
9 - HEADS UP	X#	X#	TR	X#	##	X#
10 - ENGAGEMENT INTERRUPTED	X#36	X#36	##	X#	##36	X#36
11 - INVESTIGATING/ INTERROGATING	X#	X#	TR	XR	X#	X#
12 - SHADOWING	X#	X#	T88R	XR	X#	X#
13 - INTERVENING	X#	X#	T87R	XR	X#	X#
14 - COVERING	X#	X#	TR	XR	X#	X#
15 - BATTLE DAMAGE ASSESSMENT UNKNOWN	X#	X#	X#	X#	TR	XR

WEAPON ENGAGEMENT STATUS VALUE	MISSION CATEGORIES					
	MSL/RPV		SAM UNIT CONT		EW	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
0 - NO STATEMENT	X#	X#	X#	X#	X#	X#
1 - RECOMMEND REATTACK	X#	X#	X#	X#	X#	X#
2 - WEAPON ASSIGNED	TR	X#	TR	X#	X#	X#
3 - TRACKING/LOCKED ON/READY TO FIRE/BIRD AFFIRM	TR	X#	TR	X#	X#	X#
4 - FIRING/MISSILE IN FLIGHT/ENGAGING TO DESTROY	TR	X#	TR	X#	X#	X#
5 - EFFECTIVE/TARGET DESTROYED/GRAND SLAM	TR	X#	TR	X#	X#	X#
6 - PARTIALLY EFFECTIVE	##	X#	##	X#	X#	X#
7 - NOT EFFECTIVE	##	X#	##	X#	X#	X#
8 - ENGAGEMENT BROKEN	TR	X#	TR	X#	X#	X#
9 - HEADS UP	##	X#	##	X#	X#	X#

A-170

APPENDIX A

MIL-STD-6016B

TABLE A.5-J10.2-1. Weapon Engagement Status Value Minimum Implementation by Mission Category (Sheet 2 of 2)

WEAPON ENGAGEMENT STATUS VALUE	MISSION CATEGORIES					
	MSL/RPV		SAM UNIT CONT		EW	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
10 - ENGAGEMENT INTERRUPTED	##	X#36	##	X#36	X#36	X#36
11 - INVESTIGATING/ INTERROGATING	##	X#	##	X#	X#	X#
12 - SHADOWING	X#	X#	##	X#	X#	X#
13 - INTERVENING	X#	X#	X#	X#	X#	X#
14 - COVERING	X#	X#	X#	X#	X#	X#
15 - BATTLE DAMAGE ASSESSMENT UNKNOWN	X#	X#	X#	X#	X#	X#

MIL-STD-6016B

APPENDIX A

TABLE A.5-J10.2-2. Word Level Minimum Implementation by Weapon Engagement Status Value

WEAPON ENGAGEMENT STATUS VALUE	J10.2 WORDS		
	J10.2I	J10.2C1	J10.2C2
0 - NO STATEMENT	X#	X#	XX
1 - RECOMMEND REATTACK	TR	##	XX
2 - WEAPON ASSIGNED	TR	#R	##
3 - TRACKING/LOCKED ON/READY TO FIRE/BIRD AFFIRM	TR	#R	##
4 - FIRING/MISSILE IN FLIGHT/ENGAGING TO DESTROY	TR	#R	##
5 - EFFECTIVE/TARGET DESTROYED/GRAND SLAM	TR	#R	##
6 - PARTIALLY EFFECTIVE	TR	##	##
7 - NOT EFFECTIVE	TR	##	##
8 - ENGAGEMENT BROKEN	TR	#R	##
9 - HEADS UP	TR	#R	XX
10 - ENGAGEMENT INTERRUPTED	TR36	##36	##36
11 - INVESTIGATING/ INTERROGATING	TR	##	##
12 - SHADOWING	TR	##	##
13 - INTERVENING	TR	##	##
14 - COVERING	TR	##	##
15 - BATTLE DAMAGE ASSESSMENT UNKNOWN	TR	##	XX

TABLE A.5-J10.2-3. Data Element Level Minimum Implementation by Weapon Engagement Status Value (Sheet 1 of 2)

J10.2I DATA ELEMENT	WEAPON ENGAGEMENT STATUS VALUE							
	0	1	2	3	4	5	6	7
TRACK NUMBER, REFERENCE	X#	TR	TR	TR	TR	TR	TR	TR
TRACK NUMBER, TARGET	X#	TR	TR	TR	TR	TR	TR	TR
WEAPON SYSTEM	X#	##	##	##	##	##	##	##
WEAPON ENGAGEMENT STATUS	X#	TR	TR	TR	TR	TR	TR	TR
J10.2C1 DATA ELEMENT								
TRACK NUMBER, TARGET A	X#	##	TR	TR	TR	TR	##	##
AIR WEAPON/ENGAGEMENT STATUS, A	X#	##	TR	TR	TR	TR	##	##
TRACK NUMBER, TARGET B	X#	##	#R	#R	#R	#R	##	##
AIR WEAPON/ENGAGEMENT STATUS, B	X#	##	#R	#R	#R	#R	##	##
J10.2C2 DATA ELEMENT								
TRACK NUMBER, FRIENDLY WEAPON	XX	XX	TR	TR	TR	TR	TR	TR
TIME FUNCTION, 1	XX	XX	TR	TR	TR	TR	TR	TR
SECOND, TENTHS	XX	XX	TR	TR	TR	TR	TR	TR
MINUTE	XX	XX	TR	TR	TR	TR	TR	TR

TABLE A.5-J10.2-3. Data Element Level Minimum Implementation by Weapon Engagement Status Value (Sheet 2 of 2)

J10.2I DATA ELEMENT	WEAPON ENGAGEMENT STATUS VALUE							
	8	9	10	11	12	13	14	15
TRACK NUMBER, REFERENCE	TRTR	XX##	TRTR	TRTR	TRTR	TRTR	TRTR	XXTR
TIME FUNCTION, 1TRACK NUMBER, TARGET	TRTR	XXTR	TRTR	TRTR	TRTR	TRTR	TRTR	XXTR
SECOND, TENTHSEAPON SYSTEM	TR##	XXNN	TR##	TR##	TR##	TR##	TR##	XX##
MINUTEWEAPON ENGAGEMENT STATUS	TRTR	XXTR	TRTR	TRTR	TRTR	TRTR	TRTR	XXTR
J10.2C1 DATA ELEMENT								
TRACK NUMBER, TARGET A	TR	TR	##	##	##	##	##	##
AIR WEAPON/ENGAGEMENT STATUS, A	TR	TR	##	##	##	##	##	##
TRACK NUMBER, TARGET B	#R	#R	##	##	##	##	##	##
AIR WEAPON/ENGAGEMENT STATUS, B	#R	#R	##	##	##	##	##	##
J10.2C2 DATA ELEMENT								
TRACK NUMBER, FRIENDLY WEAPON								

MIL-STD-6016B

APPENDIX A

TABLE A.5-J10.3. Word, Data Element, and Data Item Minimum Implementation

WORD LEVEL

<u>WORD</u>	<u>MIN IMP</u>
J10.3I	TR
J10.3E0	TR
J10.3C1	TR
J10.3C2	##

DATA ELEMENT LEVEL

<u>J10.3I</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
TRACK NUMBER, ADDRESSEE	TR
TRACK NUMBER, REFERENCE	TR
REQUEST FOR ASSUME CONTROL	TR
CANCELLATION INDICATOR	TR
RECEIPT/COMPLIANCE	TR
RECURRENCE RATE, RECEIPT/COMPLIANCE	TR

<u>J10.3E0</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
TRACK NUMBER, OBJECTIVE	T66R66
LINK 4A ADDRESS	#22R
VOICE CALL SIGN	#22#

<u>J10.3C1</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
CONTROL CHANNEL	TR
VOICE FREQUENCY/CHANNEL INDICATOR	TR
VOICE FREQUENCY/CHANNEL	TR
LINK 4A FREQUENCY	##
MODE III CODE, 1	#22#
SQUAWK FLASH INDICATOR	##
RADIO TYPE	##
SECURE RADIO INDICATOR	##

<u>J10.3C2</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
MISSION CORRELATOR	TR

MIL-STD-6016B

APPENDIX A

TABLE A.5-J10.5. Word, Data Element, and Data Item Minimum Implementation

WORD LEVEL

<u>WORD</u>	<u>MIN IMP</u>
J10.5I	TR

DATA ELEMENT LEVEL

<u>J10.5I</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
TRACK NUMBER, REFERENCE	TR
VOICE CALL SIGN	#22#
HANDOVER INDICATOR	TR
MISSION CORRELATOR	##
CONTROLLING UNIT STATUS	TR

APPENDIX A

J10.6 Word, Data Element, and Data Item Minimum Implementation

To determine the words, data elements, and data items in the J10.6 message that are required for implementation, first, enter Table A.5-J10.6-1 from the top at a Mission Category that will be implemented to determine the implementation requirements for each action value. Next, enter Table A.5-J10.6-2 from the left at an action value that will be implemented. Proceed across the row to determine the required word implementation. Then, for any implemented action value enter Table A.5-J10.6-3 and proceed down the column to determine the required data element implementation. At each level, the transmit and receive requirements are considered separately, with no interaction between them.

MIL-STD-6016B

APPENDIX A

TABLE A.5-J10.6-1. Pairing Action Value Minimum Implementation by Mission Category

PAIRING ACTION VALUE	MISSION CATEGORIES					
	ATC	AIC	ASO	MSL/RPV	SAM UNIT CONT	EW
0 - UNDEFINED	XX	XX	XX	XX	XX	XX
1 - GENERAL PAIRING	TR	TR	TR	TR	TR	X#
2 - INTERDICTION PAIRING	X#	XX	TR	X#	X#	X#
3 - RENDEZVOUS PAIRING	##	T67R	##	X#	X#	X#
4 - COMBAT AIR PATROL PAIRING	X#	T109R	X#	X#	X#	X#
5 - CLOSE AIR SUPPORT PAIRING	X#	##	TR	X#	X#	X#
6 - RETURN TO BASE PAIRING	TR	T69R	T69R	##	X#	X#
7 - TANKER PAIRING	TR	T68R	T68R	X#	X#	X#
8-14 - UNDEFINED	XX	XX	XX	XX	XX	XX
15 - TERMINATE PAIRING	TR	TR	TR	TR	TR	X#

TABLE A.5-J10.6-2. Word Level Minimum Implementation by Pairing Action Value

PAIRING ACTION VALUE	J10.6 WORDS
	J10.6I
0 - UNDEFINED	XX
1 - GENERAL PAIRING	TR
2 - INTERDICTION PAIRING	TR
3 - RENDEZVOUS PAIRING	TR
4 - COMBAT AIR PATROL PAIRING	TR
5 - CLOSE AIR SUPPORT PAIRING	TR
6 - RETURN TO BASE PAIRING	TR
7 - TANKER PAIRING	TR
8-14 - UNDEFINED	XX
15 - TERMINATE PAIRING	TR

TABLE A.5-J10.6-3. Data Element Level Minimum Implementation for All Defined Pairing Action Values

J10.6I DATA ELEMENT	PAIRING ACTION VALUE				
	0	1	2	3	4
TRACK NUMBER, REFERENCE	XX	TR	TR	TR	TR
TRACK NUMBER, OBJECTIVE	XX	TR	TR	TR	TR

J10.6I DATA ELEMENT	PAIRING ACTION VALUE				
	5	6	7	8-14	15
TRACK NUMBER, REFERENCE	TR	TR	TR	XX	TR
TRACK NUMBER, OBJECTIVE	TR	TR	TR	XX	TR

APPENDIX A

J12.0 Word, Data Element, and Data Item Minimum Implementation

To determine the words, data elements, and data items in the J12.0 message that are required for implementation, first, enter Table A.5-J12.0-1 from the top at a Mission Category that will be implemented by a C² JU or a nonC² JU to determine the implementation requirements for each action value. Next, enter Table A.5-J12.0-2 from the left at an action value that will be implemented. Proceed across the row to determine the required word implementation for a C² JU or a nonC² JU. When interpreting this table a system must also take into consideration the Mission Category(s) it is implementing. If implementing ATC, AIC, MSL/RPV, SAM UNIT CONTROL, or EW, the J12.0C3, J12.0C4, and J12.0C6 columns of table A.5-J12.0-2 should be disregarded. All other columns are applicable. Then, enter Table A.5-J12.0-3 from the top at an action value that will be implemented by a C² JU or a nonC² JU. Proceed down the column to determine the required data element implementation for each word. At each level, the transmit and receive requirements are considered separately, with no interaction between them.

TABLE A.5-J12.0-1. Mission Assignment Discrete Value Minimum Implementation by Mission Category (Sheet 1 of 4)

MISSION ASSIGNMENT DISCRETE VALUE	MISSION CATEGORIES					
	ATC		AIC		ASO	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
0 - NO STATEMENT	X#	X#	X#	X#	X#	X#
1 - REFUEL	##	X#	##	X#	##	X#
2 - ORBIT	##	X#	##	X#	##	X#
3 - RECALL	##	X#	T#	XR	T#	#R
4 - RETURN TO BASE	##	X#	T76#	XR	T76#	#R
5 - ENGAGE	X#	X#	T#	XR	X#	X#
6 - PRIORITY KILL	X#	X#	T#	XR	X#	X#
7 - BREAK ENGAGEMENT	X#	X#	T#	XR	X#	X#
8 - INVESTIGATE/INTERROGATE	X#	X#	T#	XR	X#	X#
9 - CLEAR TO DROP	X#	X#	X#	X#	T99#	#R99
10 - CEASE/DO NOT DROP	X#	X#	X#	X#	T99#	#R99
11 - INTERVENE	X#	X#	T77#	XR	X#	X#
12 - DIVERT	##	X#	T73#	XR	T73#	XR
13 - AIR-TO-SURFACE	X#	X#	##	X#	##	##
14 - AIR-TO-AIR	X#	X#	##	X#	##	##
15 - SEARCH AND RESCUE	T75#	XR	T75#	XR	T75#	#R
16 - COMBAT AIR PATROL	X#	X#	T78#	XR	X#	##
17 - PRECISION BOMBING	X#	X#	X#	X#	T#	#R100
18 - LASER DESIGNATION	X#	X#	X#	X#	T#	#R100
19 - BEACON BOMBING	X#	X#	X#	X#	##	##
20 - CLOSE AIR SUPPORT	X#	X#	X#	X#	T#	#R100
21 - INTERDICTION	X#	X#	X#	X#	T#	#R101
22 - AERIAL RECONNAISSANCE	X#	X#	##	X#	T#	#R100
23 - ESCORT	X#	X#	##	X#	##	X#
24 - SHADOW	X#	X#	##	X#	X#	X#
25 - WEAPONS FREE	X#	X#	T#	XR	X#	X#
26 - WEAPONS TIGHT	X#	X#	T#	XR	X#	X#
27 - SALVO/CLEAR AIRCRAFT	T#	XR	T#	XR	T#	XR
28 - ALERT CONDITION WHITE	T70#	XR	T70#	XR	T70#	XR
29 - ALERT CONDITION YELLOW	T71#	XR	T71#	XR	T71#	XR

A-180

APPENDIX A

MIL-STD-6016B

TABLE A.5-J12.0-1. Mission Assignment Discrete Value Minimum Implementation by Mission Category (Sheet 2 of 4)

MISSION ASSIGNMENT DISCRETE VALUE	MISSION CATEGORIES					
	ATC		AIC		ASO	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
30 - ALERT CONDITION RED	T72#	XR	T72#	XR	T72#	XR
31 - COVER	X#	X#	T#	XR	X#	X#
32 - VISUAL IDENTIFICATION	X#	X#	##	X#	##	##
33 - DISUSED	XX	XX	XX	XX	XX	XX
34 - GO TO VOICE	X#	X#	##	X#	##	##
35 - HIGH INTEREST TRACK DESIGNATION	X#	X#	T#	XR	##	X#
36 - CANCEL HIGH INTEREST TRACK DESIGNATION	X#	X#	T#	XR	##	X#
37 - SENSOR TARGET REPORTS ON	X#	X#	T#	XR	##	X#
38 - SENSOR TARGET REPORTS OFF	X#	X#	T#	XR	##	X#
39 - SUPPRESSION OF ENEMY AIR DEFENSES	X#	X#	##	X#	T#	#R100
40 - ARMED RECONNAISSANCE	X#	X#	X#	X#	T#	#R100
41 - ATTACK	X#	X#	X#	X#	T#	#R101
42 - CEASE ATTACK	X#	X#	X#	X#	T#	#R101
43 - RELATED MISSION DATA	X#	X#	X#	X#	T#	#R
44 - COUNTER AIR ATTACK	X#	X#	X#	X#	##	##
45 - FIGHTER SWEEP	X#	X#	##	X#	##	##
46 - CEASE FIRE	##	##	##	##	##	##
47 - HOLD FIRE	##	##	##	##	##	##
48-62 - UNDEFINED	XX	XX	XX	XX	XX	XX
63 - CEASE MISSION	X#	X#	T#	XR	T#	#R

MISSION ASSIGNMENT DISCRETE VALUE	MISSION CATEGORIES					
	MSL/RPV		SAM UNIT CONT		EW	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
0 - NO STATEMENT	X#	X#	X#	X#	X#	X#
1 - REFUEL	X#	X#	X#	X#	X#	X#
2 - ORBIT	X#	X#	X#	X#	X#	X#
3 - RECALL	X#	X#	X#	X#	X#	X#
4 - RETURN TO BASE	X#	X#	X#	X#	X#	X#

A-181

APPENDIX A

MIL-STD-6016B

TABLE A.5-J12.0-1. Mission Assignment Discrete Value Minimum Implementation by Mission Category (Sheet 3 of 4)

MISSION ASSIGNMENT DISCRETE VALUE	MISSION CATEGORIES					
	MSL/RPV		SAM UNIT CONT		EW	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
5 - ENGAGE	X#	X#	T#	XR	X#	X#
6 - PRIORITY KILL	X#	X#	##	X#	X#	X#
7 - BREAK ENGAGEMENT	X#	X#	T#	XR	X#	X#
8 - INVESTIGATE/INTERROGATE	X#	X#	X#	X#	X#	X#
9 - CLEAR TO DROP	X#	X#	X#	X#	X#	X#
10 - CEASE/DO NOT DROP	X#	X#	X#	X#	X#	X#
11 - INTERVENE	X#	X#	X#	X#	X#	X#
12 - DIVERT	X#	X#	X#	X#	X#	X#
13 - AIR-TO-SURFACE	X#	X#	X#	X#	X#	X#
14 - AIR-TO-AIR	X#	X#	X#	X#	X#	X#
15 - SEARCH AND RESCUE	X#	X#	X#	X#	X#	X#
16 - COMBAT AIR PATROL	X#	X#	X#	X#	X#	X#
17 - PRECISION BOMBING	X#	X#	X#	X#	X#	X#
18 - LASER DESIGNATION	X#	X#	X#	X#	X#	X#
19 - BEACON BOMBING	X#	X#	X#	X#	X#	X#
20 - CLOSE AIR SUPPORT	X#	X#	X#	X#	X#	X#
21 - INTERDICTION	X#	X#	X#	X#	X#	X#
22 - AERIAL RECONNAISSANCE	##	X#	X#	X#	##	X#
23 - ESCORT	X#	X#	X#	X#	X#	X#
24 - SHADOW	X#	X#	X#	X#	X#	X#
25 - WEAPONS FREE	X#	X#	T#	XR	X#	X#
26 - WEAPONS TIGHT	X#	X#	T#	XR	X#	X#
27 - SALVO/CLEAR AIRCRAFT	X#	X#	X#	X#	X#	X#
28 - ALERT CONDITION WHITE	X#	X#	T70#	XR	X#	X#
29 - ALERT CONDITION YELLOW	X#	X#	T71#	XR	X#	X#
30 - ALERT CONDITION RED	X#	X#	T72#	XR	X#	X#
31 - COVER	X#	X#	T#	XR	X#	X#
32 - VISUAL IDENTIFICATION	X#	X#	X#	X#	X#	X#
33 - DISUSED	XX	XX	XX	XX	XX	XX

A-182

APPENDIX A

MIL-STD-6016B

TABLE A.5-J12.0-1. Mission Assignment Discrete Value Minimum Implementation by Mission Category (Sheet 4 of 4)

MISSION ASSIGNMENT DISCRETE VALUE	MISSION CATEGORIES					
	MSL/RPV		SAM UNIT CONT		EW	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
34 - GO TO VOICE	X#	X#	##	X#	X#	X#
35 - HIGH INTEREST TRACK DESIGNATION	X#	X#	##	X#	X#	X#
36 - CANCEL HIGH INTEREST TRACK DESIGNATION	X#	X#	##	X#	X#	X#
37 - SENSOR TARGET REPORTS ON	X#	X#	X#	X#	X#	X#
38 - SENSOR TARGET REPORTS OFF	X#	X#	X#	X#	X#	X#
39 - SUPPRESSION OF ENEMY AIR DEFENSES	X#	X#	##	X#	##	X#
40 - ARMED RECONNAISSANCE	X#	X#	X#	X#	X#	X#
41 - ATTACK	X#	X#	X#	X#	X#	X#
42 - CEASE ATTACK	X#	X#	X#	X#	X#	X#
43 - RELATED MISSION DATA	X#	X#	X#	X#	X#	X#
44 - COUNTER AIR ATTACK	X#	X#	X#	X#	X#	X#
45 - FIGHTER SWEEP	X#	X#	X#	X#	X#	X#
46 - CEASE FIRE	##	##	T#	X#	##	##
47 - HOLD FIRE	##	##	T#	X#	##	##
48-62 - UNDEFINED	XX	XX	XX	XX	XX	XX
63 - CEASE MISSION	X#	X#	T#	XR	X#	X#

MIL-STD-6016B

APPENDIX A

TABLE A.5-J12.0-2. Word Level Minimum Implementation by Mission Assignment
Discrete value (Sheet 1 of 6)

MISSION ASSIGNMENT DISCRETE VALUE	J12.0 WORDS			
	J12.0I		J12.0C1 FOR ALL EXCEPT ASO	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU
0 - NO STATEMENT	X#	X#	X#	X#
1 - REFUEL	T#	XR	T#	XR
2 - ORBIT	T#	XR	T#	XR
3 - RECALL	T#	TR	T#	TR
4 - RETURN TO BASE	T#	TR	T#	TR
5 - ENGAGE	T#	XR	T#	XR
6 - PRIORITY KILL	T#	XR	T#	XR
7 - BREAK ENGAGEMENT	T#	XR	##	X#
8 - INVESTIGATE/INTERROGATE	T#	XR	T#	XR
9 - CLEAR TO DROP	T#	TR	##	TR
10 - CEASE/DO NOT DROP	T#	TR	X#	TR
11 - INTERVENE	T#	XR	T#	XR
12 - DIVERT	T#	XR	T#	XR
13 - AIR-TO-SURFACE	T#	TR	X#	X#
14 - AIR-TO-AIR	T#	TR	X#	X#
15 - SEARCH AND RESCUE	T#	TR	T#	TR
16 - COMBAT AIR PATROL	T#	TR	T#	TR
17 - PRECISION BOMBING	T#	TR	X#	TR
18 - LASER DESIGNATION	T#	TR	X#	TR
19 - BEACON BOMBING	T#	TR	X#	X#
20 - CLOSE AIR SUPPORT	T#	TR	##	TR
21 - INTERDICTION	T#	TR	##	TR
22 - AERIAL RECONNAISSANCE	T#	TR	T#	TR
23 - ESCORT	T#	XR	T#	XR
24 - SHADOW	T#	XR	T#	XR
25 - WEAPONS FREE	T#	XR	X#	X#
26 - WEAPONS TIGHT	T#	XR	X#	X#
27 - SALVO/CLEAR AIRCRAFT	T#	XR	T#	XR
28 - ALERT CONDITION WHITE	T#	XR	X#	X#
29 - ALERT CONDITION YELLOW	T#	XR	X#	X#
30 - ALERT CONDITION RED	T#	XR	X#	X#
31 - COVER	T#	XR	T#	XR
32 - VISUAL IDENTIFICATION	T#	TR	T#	TR
33 - DISUSED	XX	XX	XX	XX
34 - GO TO VOICE	T#	TR	X#	X#
35 - HIGH INTEREST TRACK DESIGNATION	T#	XR	T#	XR
36 - CANCEL HIGH INTEREST TRACK DESIGNATION	T#	XR	X#	X#
37 - SENSOR TARGET REPORTS ON	T#	XR	X#	X#
38 - SENSOR TARGET REPORTS OFF	T#	XR	X#	X#
39 - SUPPRESSION OF ENEMY AIR DEFENSES	T#	TR	##	TR
40 - ARMED RECONNAISSANCE	T#	TR	##	TR
41 - ATTACK	T#	TR	##	TR
42 - CEASE ATTACK	T#	TR	X#	TR

MIL-STD-6016B

APPENDIX A

TABLE A.5-J12.0-2. Word Level Minimum Implementation by Mission Assignment Discrete value (Sheet 2 of 6)

MISSION ASSIGNMENT DISCRETE VALUE	J12.0 WORDS			
	J12.0I		J12.0C1 FOR ALL EXCEPT ASO	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU
43 - RELATED MISSION DATA	T#	TR	##	TR
44 - COUNTER AIR ATTACK	T#	TR	##	TR
45 - FIGHTER SWEEP	T#	TR	X#	X#
46 - CEASE FIRE	T#	XR	T#	XR
47 - HOLD FIRE	T#	XR	T#	XR
48-62 - UNDEFINED	XX	XX	XX	XX
63 - CEASE MISSION	T#	TR	X#	TR

MISSION ASSIGNMENT DISCRETE VALUE	J12.0 WORDS			
	J12.0C2		J12.0C3 FOR ASO ONLY	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU
0 - NO STATEMENT	X#	X#	X#	X#
1 - REFUEL	T#	XR	T#	XR
2 - ORBIT	T#	XR	T#	XR
3 - RECALL	T#	TR	T#	TR
4 - RETURN TO BASE	##	X#	T#	TR
5 - ENGAGE	T#	XR	X#	X#
6 - PRIORITY KILL	T#	XR	X#	X#
7 - BREAK ENGAGEMENT	##	X#	#	X#
8 - INVESTIGATE/INTERROGATE	T#	XR	X#	X#
9 - CLEAR TO DROP	##	##	T#	TR
10 - CEASE/DO NOT DROP	X#	X#	X#	X#
11 - INTERVENE	T#	XR	X#	X#
12 - DIVERT	##	X#	T#	XR
13 - AIR-TO-SURFACE	X#	X#	X#	X#
14 - AIR-TO-AIR	X#	X#	X#	X#
15 - SEARCH AND RESCUE	X#	X#	T#	#R
16 - COMBAT AIR PATROL	T#	TR	X#	X#
17 - PRECISION BOMBING	X#	##	T#	#R
18 - LASER DESIGNATION	X#	##	T#	#R
19 - BEACON BOMBING	X#	X#	T#	TR
20 - CLOSE AIR SUPPORT	##	##	T#	#R
21 - INTERDICTION	##	##	T#	#R
22 - AERIAL RECONNAISSANCE	X#	X#	T#	#R
23 - ESCORT	T#	XR	T#	XR
24 - SHADOW	T#	XR	X#	X#
25 - WEAPONS FREE	X#	X#	X#	X#
26 - WEAPONS TIGHT	X#	X#	X#	X#
27 - SALVO/CLEAR AIRCRAFT	X#	X#	T#	XR
28 - ALERT CONDITION WHITE	X#	X#	X#	X#
29 - ALERT CONDITION YELLOW	X#	X#	X#	X#

MIL-STD-6016B

APPENDIX A

TABLE A.5-J12.0-2. Word Level Minimum Implementation by Mission Assignment Discrete value (Sheet 3 of 6)

MISSION ASSIGNMENT DISCRETE VALUE	J12.0 WORDS			
	J12.0C2		J12.0C3 FOR ASO ONLY	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU
30 - ALERT CONDITION RED	X#	X#	X#	X#
31 - COVER	T#	XR	X#	X#
32 - VISUAL IDENTIFICATION	T#	#R	T#	TR
33 - DISUSED	XX	XX	XX	XX
34 - GO TO VOICE	X#	X#	X#	X#
35 - HIGH INTEREST TRACK DESIGNATION	T#	XR	##	X#
36 - CANCEL HIGH INTEREST TRACK DESIGNATION	X#	X#	X#	X#
37 - SENSOR TARGET REPORTS ON	X#	X#	X#	X#
38 - SENSOR TARGET REPORTS OFF	X#	X#	X#	X#
39 - SUPPRESSION OF ENEMY AIR DEFENSES	##	#R	T#	#R
40 - ARMED RECONNAISSANCE	X#	X#	T#	#R
41 - ATTACK	##	##	T#	TR
42 - CEASE ATTACK	X#	X#	X#	X#
43 - RELATED MISSION DATA	##	##	T#	#R
44 - COUNTER AIR ATTACK	##	##	T#	TR
45 - FIGHTER SWEEP	X#	X#	X#	X#
46 - CEASE FIRE	T#	XR	XX	XX
47 - HOLD FIRE	T#	XR	XX	XX
48-62 - UNDEFINED	XX	XX	XX	XX
63 - CEASE MISSION	X#	X#	X#	X#

MISSION ASSIGNMENT DISCRETE VALUE	J12.0 WORDS			
	J12.0C4 FOR ASO ONLY		J12.0C5 FOR ASO ONLY	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU
0 - NO STATEMENT	X#	X#	X#	X#
1 - REFUEL	X#	X#	X#	X#
2 - ORBIT	X#	X#	#	X#
3 - RECALL	X#	X#	X#	X#
4 - RETURN TO BASE	X#	X#	X#	X#
5 - ENGAGE	X#	X#	##	##
6 - PRIORITY KILL	X#	X#	##	##
7 - BREAK ENGAGEMENT	X#	X#	X#	X#
8 - INVESTIGATE/INTERROGATE	X#	X#	##	X#
9 - CLEAR TO DROP	##	##	##	##
10 - CEASE/DO NOT DROP	X#	X#	X#	X#
11 - INTERVENE	X#	X#	X#	X#
12 - DIVERT	X#	X#	X#	X#
13 - AIR-TO-SURFACE	X#	X#	X#	X#
14 - AIR-TO-AIR	X#	X#	X#	X#
15 - SEARCH AND RESCUE	XR	X#	X#	X#
16 - COMBAT AIR PATROL	X#	X#	X#	X#

MIL-STD-6016B

APPENDIX A

TABLE A.5-J12.0-2. Word Level Minimum Implementation by Mission Assignment Discrete value (Sheet 4 of 6)

MISSION ASSIGNMENT DISCRETE VALUE	J12.0 WORDS			
	J12.0C4 FOR ASO ONLY		J12.0C5 FOR ASO ONLY	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU
17 - PRECISION BOMBING	T#	#R	##	##
18 - LASER DESIGNATION	T#	#R	##	##
19 - BEACON BOMBING	T#	TR	T#	TR
20 - CLOSE AIR SUPPORT	T#	#R	##	##
21 - INTERDICTION	T#	#R	##	##
22 - AERIAL RECONNAISSANCE	X#	X#	X#	X#
23 - ESCORT	X#	X#	X#	X#
24 - SHADOW	X#	X#	X#	X#
25 - WEAPONS FREE	X#	X#	X#	X#
26 - WEAPONS TIGHT	X#	X#	X#	X#
27 - SALVO/CLEAR AIRCRAFT	##	X#	X#	X#
28 - ALERT CONDITION WHITE	X#	X#	X#	X#
29 - ALERT CONDITION YELLOW	X#	X#	X#	X#
30 - ALERT CONDITION RED	X#	X#	X#	X#
31 - COVER	X#	X#	X#	X#
32 - VISUAL IDENTIFICATION	##	##	X#	X#
33 - DISUSED	XX	XX	XX	XX
34 - GO TO VOICE	X#	X#	X#	X#
35 - HIGH INTEREST TRACK DESIGNATION	##	X#	X#	X#
36 - CANCEL HIGH INTEREST TRACK DESIGNATION	X#	X#	X#	X#
37 - SENSOR TARGET REPORTS ON	X#	X#	X#	X#
38 - SENSOR TARGET REPORTS OFF	X#	X#	X#	X#
39 - SUPPRESSION OF ENEMY AIR DEFENSES	##	##	##	##
40 - ARMED RECONNAISSANCE	X#	X#	##	##
41 - ATTACK	T#	TR	##	##
42 - CEASE ATTACK	X#	X#	X#	X#
43 - RELATED MISSION DATA	##	##	##	##
44 - COUNTER AIR ATTACK	T#	#R	##	##
45 - FIGHTER SWEEP	X#	X#	X#	X#
46 - CEASE FIRE	XX	XX	XX	XX
47 - HOLD FIRE	XX	XX	XX	XX
48-62 - UNDEFINED	XX	XX	XX	XX
63 - CEASE MISSION	X#	X#	X#	X#

MISSION ASSIGNMENT DISCRETE VALUE	J12.0 WORDS			
	J12.0C6 FOR ASO ONLY		J12.0C7	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU
0 - NO STATEMENT	X#	X#	X#	X#
1 - REFUEL	X#	X#	X#	X#
2 - ORBIT	X#	X#	X#	X#
3 - RECALL	X#	X#	X#	X#

MIL-STD-6016B

APPENDIX A

TABLE A.5-J12.0-2. Word Level Minimum Implementation by Mission Assignment
Discrete value (Sheet 5 of 6)

MISSION ASSIGNMENT DISCRETE VALUE	J12.0 WORDS			
	J12.0C6 FOR ASO ONLY		J12.0C7	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU
4 - RETURN TO BASE	X#	X#	X#	X#
5 - ENGAGE	X#	X#	##	X#
6 - PRIORITY KILL	X#	X#	##	X#
7 - BREAK ENGAGEMENT	X#	X#	X#	X#
8 - INVESTIGATE/INTERROGATE	X#	X#	##	X#
9 - CLEAR TO DROP	X#	X#	##	##
10 - CEASE/DO NOT DROP	X#	X#	X#	X#
11 - INTERVENE	X#	X#	X#	X#
12 - DIVERT	X#	X#	X#	X#
13 - AIR-TO-SURFACE	X#	X#	X#	X#
14 - AIR-TO-AIR	X#	X#	X#	X#
15 - SEARCH AND RESCUE	X#	X#	X#	##
16 - COMBAT AIR PATROL	X#	X#	X#	X#
17 - PRECISION BOMBING	X#	X#	##	##
18 - LASER DESIGNATION	T#	XR	##	##
19 - BEACON BOMBING	X#	X#	X#	X#
20 - CLOSE AIR SUPPORT	##	##	##	##
21 - INTERDICTION	##	X#	X#	X#
22 - AERIAL RECONNAISSANCE	X#	X#	X#	##
23 - ESCORT	X#	X#	X#	X#
24 - SHADOW	X#	X#	X#	X#
25 - WEAPONS FREE	X#	X#	X#	X#
26 - WEAPONS TIGHT	X#	X#	X#	X#
27 - SALVO/CLEAR AIRCRAFT	X#	X#	X#	X#
28 - ALERT CONDITION WHITE	X#	X#	X#	X#
29 - ALERT CONDITION YELLOW	X#	X#	X#	X#
30 - ALERT CONDITION RED	X#	X#	X#	X#
31 - COVER	X#	X#	X#	X#
32 - VISUAL IDENTIFICATION	X#	X#	X#	##
33 - DISUSED	XX	XX	XX	XX
34 - GO TO VOICE	X#	X#	X#	X#
35 - HIGH INTEREST TRACK DESIGNATION	X#	X#	X#	X#
36 - CANCEL HIGH INTEREST TRACK DESIGNATION	X#	X#	X#	X#
37 - SENSOR TARGET REPORTS ON	X#	X#	X#	X#
38 - SENSOR TARGET REPORTS OFF	X#	X#	X#	X#
39 - SUPPRESSION OF ENEMY AIR DEFENSES	##	##	##	##
40 - ARMED RECONNAISSANCE	X#	X#	##	##
41 - ATTACK	X#	X#	##	##
42 - CEASE ATTACK	X#	X#	X#	X#
43 - RELATED MISSION DATA	T#	TR	##	##
44 - COUNTER AIR ATTACK	##	X#	X#	##
45 - FIGHTER SWEEP	X#	X#	X#	X#

MIL-STD-6016B

APPENDIX A

TABLE A.5-J12.0-2. Word Level Minimum Implementation by Mission Assignment
Discrete value (Sheet 6 of 6)

MISSION ASSIGNMENT DISCRETE VALUE	J12.0 WORDS			
	J12.0C6 FOR ASO ONLY		J12.0C7	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU
46 - CEASE FIRE	XX	XX	XX	XX
47 - HOLD FIRE	XX	XX	XX	XX
48-62 - UNDEFINED	XX	XX	XX	XX
63 - CEASE MISSION	X#	X#	X#	X#

TABLE A.5-J12.0-3. Data Element Level Minimum Implementation by Mission Assignment Discrete Value
(Sheet 1 of 30)

J12.0I DATA ELEMENT FOR ALL MISSION CATEGORIES	MISSION ASSIGNMENT DISCRETE VALUE									
	0		1		2		3		4	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
TRACK NUMBER, ADDRESSEE	X#	X#	T#	XR	T#	XR	T#	TR	T#	TR
TRACK NUMBER, OBJECTIVE	X#	X#	T#	XR	T#	XR	##	##	T#	TR
THREAT WARNING ENVIRONMENT	X#	X#	##	X#	##	X#	##	##	##	##
RECEIPT/COMPLIANCE	X#	X#	T#	XR	T#	XR	T#	TR	T#	TR
RECURRENCE RATE, RECEIPT/ COMPLIANCE	X#	X#	T#	XR	T#	XR	T#	TR	T#	TR
J12.0C1 DATA ELEMENT FOR ALL EXCEPT ASO										
STRENGTH	X#	X#	##	X#	##	X#	##	##	##	##
ENVIRONMENT/CATEGORY	X#	X#	T#	X#	##	X#	##	##	##	##
ORIGIN OF INDEX NUMBER	X#	X#	N40#	X#	N40#	X#	N40#	N40#	N40#	N40#
INDEX NUMBER	X#	X#	N#	X#	N#	X#	N#	N#	N#	N#
LATITUDE, 0.0103 MINUTE	X#	X#	T#	XR	T#	XR	T#	TR	T#	TR
LONGITUDE, 0.0103 MINUTE	X#	X#	T#	XR	T#	XR	T#	TR	T#	TR
J12.0C2 DATA ELEMENT FOR ALL MISSION CATEGORIES										
METHOD OF FIRE	XN	XN	NN	XN	NN	XN	NN	XN	NN	XN
COURSE	X#	X#	T#	XR	T#	XR	T#	#R	##	X#
SPEED	X#	X#	T#	XR	T#	XR	T#	#R	##	X#
ALTITUDE, 100 FT	X#	X#	T#	XR	T#	XR	##	##	##	X#
IDENTITY	X#	X#	#22#	X#	#22#	X#	#22#	#22#	#22#	X#
IDENTITY AMPLIFYING DESCRIPTOR	X#	X#	#22#	X#	#22#	X#	#22#	#22#	#22#	X#
EXERCISE INDICATOR	X#	X#	#56#56	X#56	#56#56	X#56	#56#56	#56#56	#56#56	X#56
SPACE SPECIFIC TYPE	X#	X#	##	X#	##	X#	#53#53	#53#53	##	X#
AIR SPECIFIC TYPE	X#	X#	T#	X#	##	X#	#53#53	#53#53	##	X#
SURFACE (MARITIME) SPECIFIC TYPE	X#	X#	##	X#	##	X#	#53#53	#53#53	##	X#
SUBSURFACE (MARITIME) SPECIFIC TYPE	X#	X#	##	X#	##	X#	#53#53	#53#53	##	X#
LAND (GROUND) SPECIFIC TYPE	X#	X#	##	X#	##	X#	#53#53	#53#53	##	X#
SPECIAL INTEREST INDICATOR	X#	X#	##	X#	##	X#	##	##	##	X#

A-190

APPENDIX A

MIL-STD-6016B

TABLE A.5-J12.0-3. Data Element Level Minimum Implementation by Mission Assignment Discrete Value
(Sheet 2 of 30)

J12.0C3 DATA ELEMENT	MISSION ASSIGNMENT DISCRETE VALUE									
	0		1		2		3		4	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
LATITUDE, 0.0013 MINUTE	X#	X#	T#	XR	T#	XR	T#	TR	T#	TR
LONGITUDE, 0.0013 MINUTE	X#	X#	T#	XR	T#	XR	T#	TR	T#	TR
ELEVATION, 25 FT, 1	X#	X#	##	XR	##	X#	##	##	##	##
POINT TYPE, 1	X#	X#	##	X#	##	X#	##	##	##	##
POINT NUMBER	X#	X#	NN	XN	NN	XN	NN	NN	NN	NN
J12.0C4 DATA ELEMENT FOR ASO ONLY										
TARGET TYPE	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
TARGET DEFENSES	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
RUN IN HEADING	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
EGRESS HEADING	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
NUMBER OF STORES	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
TYPE OF STORES	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
MODE OF DELIVERY	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
TIME DISCRETE	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
MINUTE	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
HOURL	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
J12.0C5 DATA ELEMENT FOR ASO ONLY										
TARGET RANGE	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
TARGET BEARING	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
DELTA ELEVATION	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
BEACON CODE	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
LATITUDE, LSB	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
LONGITUDE, LSB	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
J12.0C6 DATA ELEMENT FOR ASO ONLY										
LASER ILLUMINATOR CODE	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
TRACK NUMBER, RELATED 3	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#

TABLE A.5-J12.0-3. Data Element Level Minimum Implementation by Mission Assignment Discrete Value
(Sheet 3 of 30)

J12.0C6(continued) DATA ELEMENT	MISSION ASSIGNMENT DISCRETE VALUE									
	0		1		2		3		4	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
INDEX NUMBER, RELATED	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
J12.0C7 DATA ELEMENT FOR ALL MISSION CATEGORIES										
TRACK NUMBER, INDEX ORIGINATOR	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
INDEX NUMBER, THIRD PARTY	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
ELEVATION ANGLE, 2	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#

TABLE A.5-J12.0-3. Data Element Level Minimum Implementation by Mission Assignment Discrete Value
(Sheet 4 of 30)

J12.0I DATA ELEMENT FOR ALL MISSION CATEGORIES	MISSION ASSIGNMENT DISCRETE VALUE									
	5		6		7		8		9	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
TRACK NUMBER, ADDRESSEE	T#	XR	T#	XR	T#	XR	T#	XR	T#	TR
TRACK NUMBER, OBJECTIVE	T#	XR	T#	XR	T#	XR	T#	XR	T#	TR
THREAT WARNING ENVIRONMENT	##	X#	##	X#	##	X#	##	X#	##	##
RECEIPT/COMPLIANCE	T#	XR	T#	XR	T#	XR	T#	XR	T#	TR
RECURRENCE RATE, RECEIPT/ COMPLIANCE	T#	XR	T#	XR	T#	XR	T#	XR	T#	TR
J12.0C1 DATA ELEMENT FOR ALL EXCEPT ASO										
STRENGTH	T#	X#	T#	X#	##	X#	T#	X#	##	#R
ENVIRONMENT/CATEGORY	T#	X#	T#	X#	##	X#	T#	X#	##	#R
ORIGIN OF INDEX NUMBER	N40#	X#	N40#	X#	N40#	X#	N40#	X#	N40#	TR
INDEX NUMBER	N#	X#	N#	X#	N#	X#	N#	X#	N#	TR
LATITUDE, 0.0103 MINUTE	T#	XR	T#	XR	##	X#	T#	XR	##	##
LONGITUDE, 0.0103 MINUTE	T#	XR	T#	XR	##	X#	T#	XR	##	##
J12.0C2 DATA ELEMENT FOR ALL MISSION CATEGORIES										
METHOD OF FIRE	#115#	X#116	#115#	X#116	NN	XN	NN	XN	NN	XN
COURSE	T#	XR	T#	XR	##	X#	T#	XR	##	##
SPEED	T#	XR	T#	XR	##	X#	T#	XR	##	##
ALTITUDE, 100 FT	T#	XR	T#	XR	##	X#	T#	XR	##	##
IDENTITY	T#	XR	T#	XR	#22#	X#	T#	XR	#22#	#22#
IDENTITY AMPLIFYING DESCRIPTOR	T#	XR	T#	XR	#22#	X#	T#	XR	#22#	#22#
EXERCISE INDICATOR	T#56	XR	T#56	XR	#56#56	X#56	T#56	XR	#56#56	#56#56
SPACE SPECIFIC TYPE	##	X#	##	X#	##	X#	##	X#	X#53	X#
AIR SPECIFIC TYPE	T#	X#	T#	X#	##	X#	T#	X#	X#53	X#
SURFACE (MARITIME) SPECIFIC TYPE	##	X#	##	X#	##	X#	##	X#	#53#53	#53#
SUBSURFACE (MARITIME) SPECIFIC TYPE	##	X#	##	X#	##	X#	##	X#	#53#53	#53#
LAND (GROUND) SPECIFIC TYPE	##	X#	##	X#	##	X#	##	X#	#53#53	#53#
SPECIAL INTEREST INDICATOR	##	X#	##	X#	##	X#	##	X#	##	##

TABLE A.5-J12.0-3. Data Element Level Minimum Implementation by Mission Assignment Discrete Value
(Sheet 5 of 30)

J12.0C3 DATA ELEMENT	MISSION ASSIGNMENT DISCRETE VALUE									
	5		6		7		8		9	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
LATITUDE, 0.0013 MINUTE	##	X#	##	X#	X#	X#	##	X#	T#	TR
LONGITUDE, 0.0013 MINUTE	##	X#	##	X#	X#	X#	##	X#	T#	TR
ELEVATION, 25 FT, 1	##	X#	##	X#	X#	X#	##	X#	##	TR
POINT TYPE, 1	##	X#	##	X#	X#	X#	##	X#	T#	TR
POINT NUMBER	NN	X#	NN	X#	X#	X#	NN	X#	NN	NN
J12.0C4 DATA ELEMENT FOR ASO ONLY										
TARGET TYPE	X#	X#	X#	X#	X#	X#	X#	X#	##	##
TARGET DEFENSES	X#	X#	X#	X#	X#	X#	X#	X#	##	##
RUN IN HEADING	X#	X#	X#	X#	X#	X#	X#	X#	##	##
EGRESS HEADING	X#	X#	X#	X#	X#	X#	X#	X#	##	##
NUMBER OF STORES	X#	X#	X#	X#	X#	X#	X#	X#	##	##
TYPE OF STORES	X#	X#	X#	X#	X#	X#	X#	X#	##	##
MODE OF DELIVERY	X#	X#	X#	X#	X#	X#	X#	X#	#22#	#22#
TIME DISCRETE	X#	X#	X#	X#	X#	X#	X#	X#	##	##
MINUTE	X#	X#	X#	X#	X#	X#	X#	X#	##	##
HOURL	X#	X#	X#	X#	X#	X#	X#	X#	##	##
J12.0C5 DATA ELEMENT FOR ASO ONLY										
TARGET RANGE	N#	N#	N#	N#	X#	X#	N#	X#	N#	N#
TARGET BEARING	##	##	##	##	X#	X#	##	X#	##	##
DELTA ELEVATION	N#	N#	N#	N#	X#	X#	N#	X#	N#	N#
BEACON CODE	N22#	N22#	N22#	N22#	X#	X#	N22#	X#	N22#	N22#
LATITUDE, LSB	N#	N#	N#	N#	X#	X#	N#	X#	##	#R
LONGITUDE, LSB	N#	N#	N#	N#	X#	X#	N#	X#	##	#R
J12.0C6 DATA ELEMENT FOR ASO ONLY										
LASER ILLUMINATOR CODE	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
TRACK NUMBER, RELATED 3	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#

TABLE A.5-J12.0-3. Data Element Level Minimum Implementation by Mission Assignment Discrete Value
(Sheet 6 of 30)

J12.0C6(continued) DATA ELEMENT	MISSION ASSIGNMENT DISCRETE VALUE									
	5		6		7		8		9	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
INDEX NUMBER, RELATED	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
J12.0C7 DATA ELEMENT FOR ALL MISSION CATEGORIES										
TRACK NUMBER, INDEX ORIGINATOR	N#	X#	N#	X#	X#	X#	##	X#	N#	##
INDEX NUMBER, THIRD PARTY	N#	X#	N#	X#	X#	X#	##	X#	N#	##
ELEVATION ANGLE, 2	##	X#	##	X#	X#	X#	##	X#	##	##

TABLE A.5-J12.0-3. Data Element Level Minimum Implementation by Mission Assignment Discrete Value
(Sheet 7 of 30)

J12.0I DATA ELEMENT FOR ALL MISSION CATEGORIES	MISSION ASSIGNMENT DISCRETE VALUE									
	10		11		12		13		14	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
TRACK NUMBER, ADDRESSEE	T#	TR	T#	XR	T#	XR	T#	TR	T#	TR
TRACK NUMBER, OBJECTIVE	T#	TR	T#	XR	T#	XR	NN	XN	NN	XN
THREAT WARNING ENVIRONMENT	##	##	##	X#	##	X#	##	##	##	##
RECEIPT/COMPLIANCE	T#	TR	T#	XR	T#	XR	T#	TR	T#	TR
RECURRENCE RATE, RECEIPT/ COMPLIANCE	T#	TR	T#	XR	T#	XR	T#	TR	T#	TR
J12.0C1 DATA ELEMENT FOR ALL EXCEPT ASO										
STRENGTH	X#	N#	##	X#	##	X#	X#	X#	X#	X#
ENVIRONMENT/CATEGORY	X#	N#	T#	X#	##	X#	X#	X#	X#	X#
ORIGIN OF INDEX NUMBER	X#	TR	#40#	X#	N40#	X#	X#	X#	X#	X#
INDEX NUMBER	X#	TR	N#	X#	N#	X#	X#	X#	X#	X#
LATITUDE, 0.0103 MINUTE	X#	##	T#	XR	T#	XR	X#	X#	X#	X#
LONGITUDE, 0.0103 MINUTE	X#	##	T#	XR	T#	XR	X#	X#	X#	X#
J12.0C2 DATA ELEMENT FOR ALL MISSION CATEGORIES										
METHOD OF FIRE	NN	XN	NN	XN	NN	XN	NN	XN	NN	XN
COURSE	X#	X#	T#	XR	##	X#	X#	X#	X#	X#
SPEED	X#	X#	T#	XR	##	X#	X#	X#	X#	X#
ALTITUDE, 100 FT	X#	X#	T#	XR	##	X#	X#	X#	X#	X#
IDENTITY	X#	X#	T#	XR	#22#	X#	X#	X#	X#	X#
IDENTITY AMPLIFYING DESCRIPTOR	X#	X#	T#	XR	#22#	X#	X#	X#	X#	X#
EXERCISE INDICATOR	X#56	X#56	T#56	XR	#56#56	X#56	X#56	X#56	X#56	X#56
SPACE SPECIFIC TYPE	X#	X#	##	X#	##	X#	X#	X#	X#	X#
AIR SPECIFIC TYPE	X#	X#	T#	X#	##	X#	X#	X#	X#	X#
SURFACE (MARITIME) SPECIFIC TYPE	X#	X#	##	X#	##	X#	X#	X#	X#	X#
SUBSURFACE (MARITIME) SPECIFIC TYPE	X#	X#	##	X#	##	X#	X#	X#	X#	X#
LAND (GROUND) SPECIFIC TYPE	X#	X#	##	X#	##	X#	X#	X#	X#	X#
SPECIAL INTEREST INDICATOR	X#	X#	##	X#	##	X#	X#	X#	X#	X#

TABLE A.5-J12.0-3. Data Element Level Minimum Implementation by Mission Assignment Discrete Value
(Sheet 8 of 30)

J12.0C3 DATA ELEMENT	MISSION ASSIGNMENT DISCRETE VALUE									
	10		11		12		13		14	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
LATITUDE, 0.0013 MINUTE	X#	X#	X#	X#	T#	XR	X#	X#	X#	X#
LONGITUDE, 0.0013 MINUTE	X#	X#	X#	X#	T#	XR	X#	X#	X#	X#
ELEVATION, 25 FT, 1	X#	X#	X#	X#	##	X#	X#	X#	X#	X#
POINT TYPE, 1	X#	X#	X#	X#	##	X#	X#	X#	X#	X#
POINT NUMBER	X#	X#	X#	X#	NN	XN	X#	X#	X#	X#
J12.0C4 DATA ELEMENT FOR ASO ONLY										
TARGET TYPE	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
TARGET DEFENSES	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
RUN IN HEADING	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
EGRESS HEADING	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
NUMBER OF STORES	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
TYPE OF STORES	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
MODE OF DELIVERY	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
TIME DISCRETE	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
MINUTE	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
HOURL	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
J12.0C5 DATA ELEMENT FOR ASO ONLY										
TARGET RANGE	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
TARGET BEARING	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
DELTA ELEVATION	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
BEACON CODE	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
LATITUDE, LSB	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
LONGITUDE, LSB	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
J12.0C6 DATA ELEMENT FOR ASO ONLY										
LASER ILLUMINATOR CODE	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
TRACK NUMBER, RELATED 3	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#

TABLE A.5-J12.0-3. Data Element Level Minimum Implementation by Mission Assignment Discrete Value
(Sheet 9 of 30)

J12.0C6(continued) DATA ELEMENT	MISSION ASSIGNMENT DISCRETE VALUE									
	10		11		12		13		14	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
INDEX NUMBER, RELATED	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
J12.0C7 DATA ELEMENT FOR ALL MISSION CATEGORIES										
TRACK NUMBER, INDEX ORIGINATOR	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
INDEX NUMBER, THIRD PARTY	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
ELEVATION ANGLE, 2	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#

TABLE A.5-J12.0-3. Data Element Level Minimum Implementation by Mission Assignment Discrete Value
(Sheet 10 of 30)

J12.0I DATA ELEMENT FOR ALL MISSION CATEGORIES	MISSION ASSIGNMENT DISCRETE VALUE									
	15		16		17		18		19	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
TRACK NUMBER, ADDRESSEE	T#	TR	T#	TR	T#	TR	T#	TR	T#	TR
TRACK NUMBER, OBJECTIVE	T#	TR	##	##	##	TR	T#	TR	T#	TR
THREAT WARNING ENVIRONMENT	##	##	##	##	##	##	##	##	##	##
RECEIPT/COMPLIANCE	T#	TR	T#	TR	T#	TR	T#	TR	T#	TR
RECURRENCE RATE, RECEIPT/ COMPLIANCE	T#	TR	T#	TR	T#	TR	T#	TR	T#	TR
J12.0C1 DATA ELEMENT FOR ALL EXCEPT ASO										
STRENGTH	##	#R	##	##	X#	#R	X#	##	X#	X#
ENVIRONMENT/CATEGORY	##	#R	##	##	X#	#R	X#	##	X#	X#
ORIGIN OF INDEX NUMBER	N40#	TR	N40#	TR	X#	TR	X#	TR	X#	X#
INDEX NUMBER	N#	TR	N#	TR	X#	TR	X#	TR	X#	X#
LATITUDE, 0.0103 MINUTE	T#	NR	T#	TR	X#	N#	X#	N#	X#	X#
LONGITUDE, 0.0103 MINUTE	T#	NR	T#	TR	X#	N#	X#	N#	X#	X#
J12.0C2 DATA ELEMENT FOR ALL MISSION CATEGORIES										
METHOD OF FIRE	NN	XN	NN	XN	NN	XN	NN	XN	NN	XN
COURSE	X#	X#	##	##	X#	##	X#	##	X#	X#
SPEED	X#	X#	##	##	X#	##	X#	##	X#	X#
ALTITUDE, 100 FT	X#	X#	T#	TR	X#	##	X#	##	X#	X#
IDENTITY	X#	X#	#22#	#22#	X#	#22#	X#	#22#	X#	X#
IDENTITY AMPLIFYING DESCRIPTOR	X#	X#	#22#	#22#	X#	#22#	X#	#22#	X#	X#
EXERCISE INDICATOR	X#56	X#56	#56#56	#56#56	X#56	#56#56	X#56	#56#56	X#56	X#56
SPACE SPECIFIC TYPE	X#	X#	#53#53	#53#53	X#53	#53#	X#53	#53#53	X#53	X#53
AIR SPECIFIC TYPE	X#	X#	#53#53	#53#53	X#53	#53#	X#53	#53#53	X#53	X#53
SURFACE (MARITIME) SPECIFIC TYPE	X#	X#	#53#53	#53#53	X#53	#53#	X#53	#53#53	X#53	X#53
SUBSURFACE (MARITIME) SPECIFIC TYPE	X#	X#	#53#53	#53#53	X#53	#53#	X#53	#53#53	X#53	X#53
LAND (GROUND) SPECIFIC TYPE	X#	X#	#53#53	#53#53	X#53	#53#	X#53	#53#53	X#53	X#53
SPECIAL INTEREST INDICATOR	X#	X#	##	##	X#	##	X#	##	X#	X#

TABLE A.5-J12.0-3. Data Element Level Minimum Implementation by Mission Assignment Discrete Value
(Sheet 11 of 30)

J12.0C3 DATA ELEMENT	MISSION ASSIGNMENT DISCRETE VALUE									
	15		16		17		18		19	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
LATITUDE, 0.0013 MINUTE	T#	#R	X#	X#	T#	TR	T#	TR	T#	TR
LONGITUDE, 0.0013 MINUTE	T#	#R	X#	X#	T#	TR	T#	TR	T#	TR
ELEVATION, 25 FT, 1	##	##	X#	X#	T#	TR	T#	TR	T#	TR
POINT TYPE, 1	##	##	X#	X#	T#	TR	T#	TR	T#	TR
POINT NUMBER	NN	NN	X#	X#	NN	NN	NN	NN	NN	NN
J12.0C4 DATA ELEMENT FOR ASO ONLY										
TARGET TYPE	X#	X#	X#	X#	T#	TR	T#	TR	##	##
TARGET DEFENSES	X#	X#	X#	X#	##	#R	##	#R	##	##
RUN IN HEADING	X#	X#	X#	X#	##	#R	##	#R	##	#R
EGRESS HEADING	X#	X#	X#	X#	##	#R	##	#R	##	#R
NUMBER OF STORES	X#	X#	X#	X#	##	#R	##	#R	##	#R
TYPE OF STORES	X#	X#	X#	X#	##	#R	##	#R	##	#R
MODE OF DELIVERY	X#	X#	X#	X#	#22#	#22R	#22#	#22#	#22#	#22#
TIME DISCRETE	X#	X#	X#	X#	##	#R	T#	TR	T#	TR
MINUTE	X#	X#	X#	X#	##	#R	T#	TR	T#	TR
HOURL	X#	X#	X#	X#	##	#R	T#	TR	T#	TR
J12.0C5 DATA ELEMENT FOR ASO ONLY										
TARGET RANGE	X#	X#	X#	X#	N#	N#	N#	N#	T#	TR
TARGET BEARING	X#	X#	X#	X#	##	##	##	##	T#	TR
DELTA ELEVATION	X#	X#	X#	X#	N#	N#	N#	N#	T#	TR
BEACON CODE	X#	X#	X#	X#	N22#	N22#	N22#	N22#	T#	TR
LATITUDE, LSB	X#	X#	X#	X#	##	#R	##	#R	##	#R
LONGITUDE, LSB	X#	X#	X#	X#	##	#R	##	#R	##	#R
J12.0C6 DATA ELEMENT FOR ASO ONLY										
LASER ILLUMINATOR CODE	X#	X#	X#	X#	X#	X#	T#	TR	X#	X#
TRACK NUMBER, RELATED 3	X#	X#	X#	X#	X#	X#	NN	NN	X#	X#

TABLE A.5-J12.0-3. Data Element Level Minimum Implementation by Mission Assignment Discrete Value
(Sheet 12 of 30)

J12.0C6(continued) DATA ELEMENT	MISSION ASSIGNMENT DISCRETE VALUE									
	15		16		17		18		19	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
INDEX NUMBER, RELATED	X#	X#	X#	X#	X#	X#	NN	NN	X#	X#
J12.0C7 DATA ELEMENT FOR ALL MISSION CATEGORIES										
TRACK NUMBER, INDEX ORIGINATOR	X#	##	X#	X#	X#	##	X#	##	X#	X#
INDEX NUMBER, THIRD PARTY	X#	##	X#	X#	X#	##	X#	##	X#	X#
ELEVATION ANGLE, 2	X#	##	X#	X#	X#	##	X#	##	X#	X#

TABLE A.5-J12.0-3. Data Element Level Minimum Implementation by Mission Assignment Discrete Value
(Sheet 13 of 30)

J12.0I DATA ELEMENT FOR ALL MISSION CATEGORIES	MISSION ASSIGNMENT DISCRETE VALUE									
	20		21		22		23		24	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
TRACK NUMBER, ADDRESSEE	T#	TR	T#	TR	T#	TR	T#	XR	T#	XR
TRACK NUMBER, OBJECTIVE	T#	TR	T#	TR	T#	TR	T#	XR	T#	XR
THREAT WARNING ENVIRONMENT	##	##	##	##	##	##	##	X#	##	X#
RECEIPT/COMPLIANCE	T#	TR	T#	TR	T#	TR	T#	XR	T#	XR
RECURRENCE RATE, RECEIPT/ COMPLIANCE	T#	TR	T#	TR	T#	TR	T#	XR	T#	XR
J12.0C1 DATA ELEMENT FOR ALL EXCEPT ASO										
STRENGTH	##	##	##	##	##	##	##	X#	##	X#
ENVIRONMENT/CATEGORY	##	##	##	#R	##	##	T#	X#	T#	X#
ORIGIN OF INDEX NUMBER	N40#	TR	N40#	TR	N40#	TR	N40#	X#	N40#	X#
INDEX NUMBER	N#	TR	N#	TR	N#	TR	N#	X#	N#	X#
LATITUDE, 0.0103 MINUTE	##	N#	##	N#	T#	NR	T#	XR	T#	XR
LONGITUDE, 0.0103 MINUTE	##	N#	##	N#	T#	NR	T#	XR	T#	XR
J12.0C2 DATA ELEMENT FOR ALL MISSION CATEGORIES										
METHOD OF FIRE	NN	XN	NN	XN	NN	XN	NN	XN	NN	XN
COURSE	##	##	##	#R	X#	X#	T#	XR	T#	XR
SPEED	##	##	##	#R	X#	X#	T#	XR	T#	XR
ALTITUDE, 100 FT	##	##	##	#R	X#	X#	T#	XR	T#	XR
IDENTITY	#22#	#22#	#22#	#22R	X#	X#	T#	XR	T#	XR
IDENTITY AMPLIFYING DESCRIPTOR	#22#	#22#	#22#	#22R	X#	X#	T#	XR	T#	XR
EXERCISE INDICATOR	#56#56	#56#56	#56#56	#56#56	X#56	X#56	T#56	XR	T#56	XR
SPACE SPECIFIC TYPE	#53#53	#53#53	#53#53	#53#	X#	X#	##	X#	##	X#
AIR SPECIFIC TYPE	#53#53	#53#53	#53#53	#53#	X#	X#	T#	X#	T#	X#
SURFACE (MARITIME) SPECIFIC TYPE	#53#53	#53#53	#53#53	#53R	X#	X#	##	X#	##	X#
SUBSURFACE (MARITIME) SPECIFIC TYPE	#53#53	#53#53	#53#53	#53#	X#	X#	##	X#	##	X#
LAND (GROUND) SPECIFIC TYPE	#53#53	#53#53	#53#53	#53#	X#	X#	##	X#	##	X#
SPECIAL INTEREST INDICATOR	##	##	##	##	X#	X#	##	X#	##	X#

TABLE A.5-J12.0-3. Data Element Level Minimum Implementation by Mission Assignment Discrete Value
(Sheet 14 of 30)

J12.0C3 DATA ELEMENT	MISSION ASSIGNMENT DISCRETE VALUE									
	20		21		22		23		24	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
LATITUDE, 0.0013 MINUTE	T#	TR	T#	TR	T#	TR	T#	XR	X#	X#
LONGITUDE, 0.0013 MINUTE	T#	TR	T#	TR	T#	TR	T#	XR	X#	X#
ELEVATION, 25 FT, 1	##	TR	##	TR	##	##	##	X#	X#	X#
POINT TYPE, 1	T#	TR	T#	TR	T#	TR	##	X#	X#	X#
POINT NUMBER	NN	NN	NN	NN	NN	NN	NN	XN	X#	X#
J12.0C4 DATA ELEMENT FOR ASO ONLY										
TARGET TYPE	T#	TR	T#	TR	X#	X#	X#	X#	X#	X#
TARGET DEFENSES	##	##	##	##	X#	X#	X#	X#	X#	X#
RUN IN HEADING	##	##	##	##	X#	X#	X#	X#	X#	X#
EGRESS HEADING	##	##	##	##	X#	X#	X#	X#	X#	X#
NUMBER OF STORES	##	##	##	##	X#	X#	X#	X#	X#	X#
TYPE OF STORES	##	##	##	##	X#	X#	X#	X#	X#	X#
MODE OF DELIVERY	#22#	#22#	#22#	#22#	X#	X#	X#	X#	X#	X#
TIME DISCRETE	##	##	##	##	X#	X#	X#	X#	X#	X#
MINUTE	##	##	##	##	X#	X#	X#	X#	X#	X#
HOURL	##	##	##	##	X#	X#	X#	X#	X#	X#
J12.0C5 DATA ELEMENT FOR ASO ONLY										
TARGET RANGE	N#	N#	N#	N#	X#	X#	X#	X#	X#	X#
TARGET BEARING	##	##	##	##	X#	X#	X#	X#	X#	X#
DELTA ELEVATION	N#	N#	N#	N#	X#	X#	X#	X#	X#	X#
BEACON CODE	N22#	N22#	N22#	N22#	X#	X#	X#	X#	X#	X#
LATITUDE, LSB	##	#R	##	#R	X#	X#	X#	X#	X#	X#
LONGITUDE, LSB	##	#R	##	#R	X#	X#	X#	X#	X#	X#
J12.0C6 DATA ELEMENT FOR ASO ONLY										
LASER ILLUMINATOR CODE	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
TRACK NUMBER, RELATED 3	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#

TABLE A.5-J12.0-3. Data Element Level Minimum Implementation by Mission Assignment Discrete Value
(Sheet 15 of 30)

J12.0C6(continued) DATA ELEMENT	MISSION ASSIGNMENT DISCRETE VALUE									
	20		21		22		23		24	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
INDEX NUMBER, RELATED	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
J12.0C7 DATA ELEMENT FOR ALL MISSION CATEGORIES										
TRACK NUMBER, INDEX ORIGINATOR	X#	X#	X#	##	X#	##	X#	X#	X#	X#
INDEX NUMBER, THIRD PARTY	X#	X#	X#	##	X#	##	X#	X#	X#	X#
ELEVATION ANGLE, 2	X#	X#	X#	##	X#	##	X#	X#	X#	X#

TABLE A.5-J12.0-3. Data Element Level Minimum Implementation by Mission Assignment Discrete Value
(Sheet 16 of 30)

J12.0I DATA ELEMENT FOR ALL MISSION CATEGORIES	MISSION ASSIGNMENT DISCRETE VALUE									
	25		26		27		28		29	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
TRACK NUMBER, ADDRESSEE	T#	XR	T#	XR	T#	XR	T#	XR	T#	XR
TRACK NUMBER, OBJECTIVE	##	XR	##	XR	##	XR	NN	XN	NN	XN
THREAT WARNING ENVIRONMENT	##	X#	##	X#	##	X#	##	X#	##	X#
RECEIPT/COMPLIANCE	T#	XR	T#	XR	T#	XR	T#	XR	T#	XR
RECURRENCE RATE, RECEIPT/ COMPLIANCE	T#	XR	T#	XR	T#	XR	T#	XR	T#	XR
J12.0C1 DATA ELEMENT FOR ALL EXCEPT ASO										
STRENGTH	##	X#	##	X#	##	X#	X#	X#	X#	X#
ENVIRONMENT/CATEGORY	##	X#	##	X#	##	X#	X#	X#	X#	X#
ORIGIN OF INDEX NUMBER	N40#	X#	N40#	X#	N40#	X#	X#	X#	X#	X#
INDEX NUMBER	N#	X#	N#	X#	N#	X#	X#	X#	X#	X#
LATITUDE, 0.0103 MINUTE	T#	XR	T#	XR	T#	XR	X#	X#	X#	X#
LONGITUDE, 0.0103 MINUTE	T#	XR	T#	XR	T#	XR	X#	X#	X#	X#
J12.0C2 DATA ELEMENT FOR ALL MISSION CATEGORIES										
METHOD OF FIRE	NN	XN	NN	XN	NN	XN	NN	XN	NN	XN
COURSE	X#	X#	X#	X#	X#	X#	X#	X#	X#	#X
SPEED	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
ALTITUDE, 100 FT	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
IDENTITY	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
IDENTITY AMPLIFYING DESCRIPTOR	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
EXERCISE INDICATOR	X#56	X#	X#56	X#	X#56	X#56	X#56	X#56	X#56	X#56
SPACE SPECIFIC TYPE	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
AIR SPECIFIC TYPE	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
SURFACE (MARITIME) SPECIFIC TYPE	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
SUBSURFACE (MARITIME) SPECIFIC TYPE	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
LAND (GROUND) SPECIFIC TYPE	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
SPECIAL INTEREST INDICATOR	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#

TABLE A.5-J12.0-3. Data Element Level Minimum Implementation by Mission Assignment Discrete Value
(Sheet 17 of 30)

J12.0C3 DATA ELEMENT	MISSION ASSIGNMENT DISCRETE VALUE									
	25		26		27		28		29	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
LATITUDE, 0.0013 MINUTE	X#	X#	X#	X#	T#	XR	X#	X#	X#	X#
LONGITUDE, 0.0013 MINUTE	X#	X#	X#	X#	T#	XR	X#	X#	X#	X#
ELEVATION, 25 FT, 1	X#	X#	X#	X#	##	X#	X#	X#	X#	X#
POINT TYPE, 1	X#	X#	X#	X#	##	X#	X#	X#	X#	X#
POINT NUMBER	X#	X#	X#	X#	NN	XN	X#	X#	X#	X#
J12.0C4 DATA ELEMENT FOR ASO ONLY										
TARGET TYPE	X#	X#	X#	X#	##	X#	X#	X#	X#	X#
TARGET DEFENSES	X#	X#	X#	X#	##	X#	X#	X#	X#	X#
RUN IN HEADING	X#	X#	X#	X#	##	X#	X#	X#	X#	X#
EGRESS HEADING	X#	X#	X#	X#	##	X#	X#	X#	X#	X#
NUMBER OF STORES	X#	X#	X#	X#	##	X#	X#	X#	X#	X#
TYPE OF STORES	X#	X#	X#	X#	##	X#	X#	X#	X#	X#
MODE OF DELIVERY	X#	X#	X#	X#	#22#	X#	X#	X#	X#	X#
TIME DISCRETE	X#	X#	X#	X#	##	X#	X#	X#	X#	X#
MINUTE	X#	X#	X#	X#	##	X#	X#	X#	X#	X#
HOURL	X#	X#	X#	X#	##	X#	X#	X#	X#	X#
J12.0C5 DATA ELEMENT FOR ASO ONLY										
TARGET RANGE	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
TARGET BEARING	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
DELTA ELEVATION	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
BEACON CODE	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
LATITUDE, LSB	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
LONGITUDE, LSB	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
J12.0C6 DATA ELEMENT FOR ASO ONLY										
LASER ILLUMINATOR CODE	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
TRACK NUMBER, RELATED 3	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#

TABLE A.5-J12.0-3. Data Element Level Minimum Implementation by Mission Assignment Discrete Value
(Sheet 18 of 30)

J12.0C6(continued) DATA ELEMENT	MISSION ASSIGNMENT DISCRETE VALUE									
	25		26		27		28		29	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
INDEX NUMBER, RELATED	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
J12.0C7 DATA ELEMENT FOR ALL MISSION CATEGORIES										
TRACK NUMBER, INDEX ORIGINATOR	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
INDEX NUMBER, THIRD PARTY	#	X#	X#	X#	X#	X#	X#	X#	X#	X#
ELEVATION ANGLE, 2	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#

TABLE A.5-J12.0-3. Data Element Level Minimum Implementation by Mission Assignment Discrete Value
(Sheet 19 of 30)

J12.0I DATA ELEMENT FOR ALL MISSION CATEGORIES	MISSION ASSIGNMENT DISCRETE VALUE									
	30		31		32		33		34	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
TRACK NUMBER, ADDRESSEE	T#	XR	T#	XR	T#	TR	XX	XX	T#	TR
TRACK NUMBER, OBJECTIVE	NN	XN	T#	XR	T#	TR	XX	XX	NN	NN
THREAT WARNING ENVIRONMENT	##	X#	##	X#	##	##	XX	XX	##	##
RECEIPT/COMPLIANCE	T#	XR	T#	XR	T#	TR	XX	XX	T#	TR
RECURRENCE RATE, RECEIPT/ COMPLIANCE	T#	XR	T#	XR	T#	TR	XX	XX	T#	TR
J12.0C1 DATA ELEMENT FOR ALL EXCEPT ASO										
STRENGTH	X#	X#	##	X#	##	#R	XX	XX	X#	X#
ENVIRONMENT/CATEGORY	X#	X#	##	X#	##	#R	XX	XX	X#	X#
ORIGIN OF INDEX NUMBER	X#	X#	N40#	X#	N40#	TR	XX	XX	X#	X#
INDEX NUMBER	X#	X#	N#	X#	N#	TR	XX	XX	X#	X#
LATITUDE, 0.0103 MINUTE	X#	X#	T#	XR	T#	NR	XX	XX	X#	X#
LONGITUDE, 0.0103 MINUTE	X#	X#	T#	XR	T#	NR	XX	XX	X#	X#
J12.0C2 DATA ELEMENT FOR ALL MISSION CATEGORIES										
METHOD OF FIRE	NN	XN	NN	XN	NN	XN	XX	XX	NN	XN
COURSE	X#	X#	T#	XR	T#	#R	XX	XX	X#	X#
SPEED	X#	X#	T#	XR	T#	#R	XX	XX	X#	X#
ALTITUDE, 100 FT	X#	X#	T#	XR	T#	#R	XX	XX	X#	X#
IDENTITY	X#	X#	T#	XR	T#	#22R	XX	XX	X#	X#
IDENTITY AMPLIFYING DESCRIPTOR	X#	X#	T#	XR	T#	#22R	XX	XX	X#	X#
EXERCISE INDICATOR	X#56	X#56	X#56	XR	T#56	#56R	XX	XX	X#56	X#56
SPACE SPECIFIC TYPE	X#	X#	##	X#	#53#53	#53#	XX	XX	X#	X#
AIR SPECIFIC TYPE	X#	X#	T#	X#	T53#53	#53R	XX	XX	X#	X#
SURFACE (MARITIME) SPECIFIC TYPE	X#	X#	##	X#	#53#53	#53#	XX	XX	X#	X#
SUBSURFACE (MARITIME) SPECIFIC TYPE	X#	X#	##	X#	#53#53	#53#	XX	XX	X#	X#
LAND (GROUND) SPECIFIC TYPE	X#	X#	##	X#	#53#53	#53#	XX	XX	X#	X#
SPECIAL INTEREST INDICATOR	X#	X#	##	X#	##	##	XX	XX	X#	X#

TABLE A.5-J12.0-3. Data Element Level Minimum Implementation by Mission Assignment Discrete Value
(Sheet 20 of 30)

J12.0C3 DATA ELEMENT	MISSION ASSIGNMENT DISCRETE VALUE									
	30		31		32		33		34	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
LATITUDE, 0.0013 MINUTE	X#	X#	X#	X#	T#	TR	XX	XX	X#	X#
LONGITUDE, 0.0013 MINUTE	X#	X#	X#	X#	T#	TR	XX	XX	X#	X#
ELEVATION, 25 FT, 1	X#	X#	X#	X#	T#	TR	XX	XX	X#	X#
POINT TYPE, 1	X#	X#	X#	X#	T#	TR	XX	XX	X#	X#
POINT NUMBER	X#	X#	X#	X#	NN	NN	XX	XX	X#	X#
J12.0C4 DATA ELEMENT FOR ASO ONLY										
TARGET TYPE	X#	X#	X#	X#	##	TR	XX	XX	X#	X#
TARGET DEFENSES	X#	X#	X#	X#	##	N#	XX	XX	X#	X#
RUN IN HEADING	X#	X#	X#	X#	N#	NN	XX	XX	X#	X#
EGRESS HEADING	X#	X#	X#	X#	N#	NN	XX	XX	X#	X#
NUMBER OF STORES	X#	X#	X#	X#	N#	NN	XX	XX	X#	X#
TYPE OF STORES	X#	X#	X#	X#	N#	NN	XX	XX	X#	X#
MODE OF DELIVERY	X#	X#	X#	X#	N22#	N22N	XX	XX	X#	X#
TIME DISCRETE	X#	X#	X#	X#	N#	NN	XX	XX	X#	X#
MINUTE	X#	X#	X#	X#	N#	NN	XX	XX	X#	X#
HOURL	X#	X#	X#	X#	N#	NN	XX	XX	X#	X#
J12.0C5 DATA ELEMENT FOR ASO ONLY										
TARGET RANGE	X#	X#	X#	X#	X#	X#	XX	XX	X#	X#
TARGET BEARING	X#	X#	X#	X#	X#	X#	XX	XX	X#	X#
DELTA ELEVATION	X#	X#	X#	X#	X#	X#	XX	XX	X#	X#
BEACON CODE	X#	X#	X#	X#	X#	X#	XX	XX	X#	X#
LATITUDE, LSB	X#	X#	X#	X#	X#	X#	XX	XX	X#	X#
LONGITUDE, LSB	X#	X#	X#	X#	X#	X#	XX	XX	X#	X#
J12.0C6 DATA ELEMENT FOR ASO ONLY										
LASER ILLUMINATOR CODE	X#	X#	X#	X#	X#	X#	XX	XX	X#	X#
TRACK NUMBER, RELATED 3	X#	X#	X#	X#	X#	X#	XX	XX	X#	X#

TABLE A.5-J12.0-3. Data Element Level Minimum Implementation by Mission Assignment Discrete Value
(Sheet 21 of 30)

J12.0C6(continued) DATA ELEMENT	MISSION ASSIGNMENT DISCRETE VALUE									
	30		31		32		33		34	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
INDEX NUMBER, RELATED	X#	X#	X#	X#	X#	X#	XX	XX	X#	X#
J12.0C7 DATA ELEMENT FOR ALL MISSION CATEGORIES										
TRACK NUMBER, INDEX ORIGINATOR	X#	X#	X#	X#	X#	##	XX	XX	X#	X#
INDEX NUMBER, THIRD PARTY	X#	X#	X#	X#	X#	##	XX	XX	X#	X#
ELEVATION ANGLE, 2	X#	X#	X#	X#	X#	N#	XX	XX	X#	X#

TABLE A.5-J12.0-3. Data Element Level Minimum Implementation by Mission Assignment Discrete Value
(Sheet 22 of 30)

J12.0I DATA ELEMENT FOR ALL MISSION CATEGORIES	MISSION ASSIGNMENT DISCRETE VALUE									
	35		36		37		38		39	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
TRACK NUMBER, ADDRESSEE	T#	XR	T#	XR	T#	XR	T#	XR	T#	TR
TRACK NUMBER, OBJECTIVE	T#	XR	T#	XR	NN	XN	NN	XN	T#	TR
THREAT WARNING ENVIRONMENT	##	X#	##	X#	##	X#	##	X#	##	##
RECEIPT/COMPLIANCE	T#	XR	T#	XR	T#	XR	T#	XR	T#	TR
RECURRENCE RATE, RECEIPT/ COMPLIANCE	T#	XR	T#	XR	T#	XR	T#	XR	T#	TR
J12.0C1 DATA ELEMENT FOR ALL EXCEPT ASO										
STRENGTH	T#	X#	X#	X#	X#	X#	X#	X#	##	#R
ENVIRONMENT/CATEGORY	T#	X#	X#	X#	X#	X#	X#	X#	##	#R
ORIGIN OF INDEX NUMBER	N40#	X#	X#	X#	X#	X#	X#	X#	N40#	TR
INDEX NUMBER	N#	X#	X#	X#	X#	X#	X#	X#	N#	TR
LATITUDE, 0.0103 MINUTE	T#	XR	X#	X#	X#	X#	X#	X#	##	N#
LONGITUDE, 0.0103 MINUTE	T#	XR	X#	X#	X#	X#	X#	X#	##	N#
J12.0C2 DATA ELEMENT FOR ALL MISSION CATEGORIES										
METHOD OF FIRE	NN	XN	NN	XN	NN	XN	NN	XN	XX	XX
COURSE	T#	XR	X#	X#	X#	X#	X#	X#	##	##
SPEED	T#	XR	X#	X#	X#	X#	X#	X#	##	##
ALTITUDE, 100 FT	T#	XR	X#	X#	X#	X#	X#	X#	##	##
IDENTITY	T#	XR	X#	X#	X#	X#	X#	X#	#22#	#22#
IDENTITY AMPLIFYING DESCRIPTOR	T#	XR	X#	X#	X#	X#	X#	X#	#22#	#22#
EXERCISE INDICATOR	T#56	XR	X#56	X#56	X#56	X#56	X#56	X#56	#56#56	#56#56
SPACE SPECIFIC TYPE	##	X#	X#	X#	X#	X#	X#	X#	#53#53	#53#
AIR SPECIFIC TYPE	T#	X#	X#	X#	X#	X#	X#	X#	#53#53	#53#
SURFACE (MARITIME) SPECIFIC TYPE	##	X#	X#	X#	X#	X#	X#	X#	T53#53	#53R
SUBSURFACE (MARITIME) SPECIFIC TYPE	##	X#	X#	X#	X#	X#	X#	X#	#53#53	#53#
LAND (GROUND) SPECIFIC TYPE	##	X#	X#	X#	X#	X#	X#	X#	T53#53	#53R
SPECIAL INTEREST INDICATOR	##	X#	X#	X#	X#	X#	X#	X#	##	##

A-211

APPENDIX A

MIL-STD-6016B

TABLE A.5-J12.0-3. Data Element Level Minimum Implementation by Mission Assignment Discrete Value
(Sheet 23 of 30)

J12.0C3 DATA ELEMENT	MISSION ASSIGNMENT DISCRETE VALUE									
	35		36		37		38		39	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
LATITUDE, 0.0013 MINUTE	##	X#	X#	X#	X#	X#	X#	X#	T#	TR
LONGITUDE, 0.0013 MINUTE	##	X#	X#	X#	X#	X#	X#	X#	T#	TR
ELEVATION, 25 FT, 1	##	X#	X#	X#	X#	X#	X#	X#	T#	TR
POINT TYPE, 1	##	X#	X#	X#	X#	X#	X#	X#	T#	TR
POINT NUMBER	NN	X#	X#	X#	X#	X#	X#	X#	NN	NN
J12.0C4 DATA ELEMENT FOR ASO ONLY										
TARGET TYPE	##	X#	X#	X#	X#	X#	X#	X#	T#	TR
TARGET DEFENSES	##	X#	X#	X#	X#	X#	X#	X#	T#	#R
RUN IN HEADING	##	X#	X#	X#	X#	X#	X#	X#	##	##
EGRESS HEADING	##	X#	X#	X#	X#	X#	X#	X#	##	##
NUMBER OF STORES	##	X#	X#	X#	X#	X#	X#	X#	##	##
TYPE OF STORES	##	X#	X#	X#	X#	X#	X#	X#	##	##
MODE OF DELIVERY	#22#	X#	X#	X#	X#	X#	X#	X#	#22#	#22#
TIME DISCRETE	##	X#	X#	X#	X#	X#	X#	X#	T#	#R
MINUTE	##	X#	X#	X#	X#	X#	X#	X#	T#	#R
HOURL	##	X#	X#	X#	X#	X#	X#	X#	T#	#R
J12.0C5 DATA ELEMENT FOR ASO ONLY										
TARGET RANGE	X#	X#	X#	X#	X#	X#	X#	X#	N#	N#
TARGET BEARING	X#	X#	X#	X#	X#	X#	X#	X#	##	##
DELTA ELEVATION	X#	X#	X#	X#	X#	X#	X#	X#	N#	N#
BEACON CODE	X#	X#	X#	X#	X#	X#	X#	X#	N22#	N22#
LATITUDE, LSB	X#	X#	X#	X#	X#	X#	X#	X#	##	#R
LONGITUDE, LSB	X#	X#	X#	X#	X#	X#	X#	X#	##	#R
J12.0C6 DATA ELEMENT FOR ASO ONLY										
LASER ILLUMINATOR CODE	X#	X#	X#	X#	X#	X#	X#	X#	##	##
TRACK NUMBER, RELATED 3	X#	X#	X#	X#	X#	X#	X#	X#	NN	NN

TABLE A.5-J12.0-3. Data Element Level Minimum Implementation by Mission Assignment Discrete Value
(Sheet 24 of 30)

J12.0C6(continued) DATA ELEMENT	MISSION ASSIGNMENT DISCRETE VALUE									
	35		36		37		38		39	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
INDEX NUMBER, RELATED	X#	X#	X#	X#	X#	X#	X#	X#	NN	NN
J12.0C7 DATA ELEMENT FOR ALL MISSION CATEGORIES										
TRACK NUMBER, INDEX ORIGINATOR	X#	X#	X#	X#	X#	X#	X#	X#	N#	##
INDEX NUMBER, THIRD PARTY	X#	X#	X#	X#	X#	X#	X#	X#	N#	##
ELEVATION ANGLE, 2	X#	X#	X#	X#	X#	X#	X#	X#	##	##

TABLE A.5-J12.0-3. Data Element Level Minimum Implementation by Mission Assignment Discrete Value
(Sheet 25 of 30)

J12.0I DATA ELEMENT FOR ALL MISSION CATEGORIES	MISSION ASSIGNMENT DISCRETE VALUE									
	40		41		42		43		44	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
TRACK NUMBER, ADDRESSEE	T#	TR	T#	TR	T#	TR	T#	TR	T#	TR
TRACK NUMBER, OBJECTIVE	T#	TR	T#	TR	T#	TR	T#	TR	T#	TR
THREAT WARNING ENVIRONMENT	##	##	##	##	##	##	##	##	##	##
RECEIPT/COMPLIANCE	T#	TR	T#	TR	T#	TR	T#	TR	T#	TR
RECURRENCE RATE, RECEIPT/ COMPLIANCE	T#	TR	T#	TR	T#	TR	T#	TR	T#	TR
J12.0C1 DATA ELEMENT FOR ALL EXCEPT ASO										
STRENGTH	##	#R	##	#R	X#	N#	##	#R	##	#R
ENVIRONMENT/CATEGORY	##	##	##	#R	X#	N#	##	#R	##	#R
ORIGIN OF INDEX NUMBER	N40#	TR	N40#	TR	X#	TR	N40#	TR	N40#	TR
INDEX NUMBER	N#	TR	N#	TR	X#	TR	N#	TR	N#	TR
LATITUDE, 0.0103 MINUTE	##	N#	##	N#	X#	N#	N#	N#	##	N#
LONGITUDE, 0.0103 MINUTE	##	N#	##	N#	X#	N#	N#	N#	##	N#
J12.0C2 DATA ELEMENT FOR ALL MISSION CATEGORIES										
METHOD OF FIRE	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
COURSE	X#	X#	##	##	X#	X#	##	##	##	##
SPEED	X#	X#	##	##	X#	X#	##	##	##	##
ALTITUDE, 100 FT	X#	X#	##	##	X#	X#	##	##	##	##
IDENTITY	X#	X#	#22#	#22#	X#	X#	#22#	#22#	#22#	#22#
IDENTITY AMPLIFYING DESCRIPTOR	X#	X#	#22#	#22#	X#	X#	#22#	#22#	#22#	#22#
EXERCISE INDICATOR	X#56	X#56	#56#56	#56#56	X#56	X#56	#56#56	#56#56	#56#56	#56#56
SPACE SPECIFIC TYPE	X#53	X#53	#53#53	#53#	X#53	X#53	#53#53	#53#	#53#53	#53#
AIR SPECIFIC TYPE	X#53	X#53	#53#53	#53#	X#53	X#53	#53#53	#53#	#53#53	#53#
SURFACE (MARITIME) SPECIFIC TYPE	X#53	X#53	T53#53	#53R	X#53	X#53	T53#53	#53R	#53#53	#53#
SUBSURFACE (MARITIME) SPECIFIC TYPE	X#53	X#53	#53#53	#53#	X#53	X#53	#53#53	#53#	#53#53	#53#
LAND (GROUND) SPECIFIC TYPE	X#53	X#53	T53#53	#53R	X#53	X#53	T53#53	#53R	#53#53	#53#
SPECIAL INTEREST INDICATOR	X#	X#	##	##	X#	X#	##	##	##	##

A-214

APPENDIX A

MIL-STD-6016B

TABLE A.5-J12.0-3. Data Element Level Minimum Implementation by Mission Assignment Discrete Value
(Sheet 26 of 30)

J12.0C3 DATA ELEMENT	MISSION ASSIGNMENT DISCRETE VALUE									
	40		41		42		43		44	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
LATITUDE, 0.0013 MINUTE	T#	TR	T#	TR	X#	X#	T#	TR	T#	TR
LONGITUDE, 0.0013 MINUTE	T#	TR	T#	TR	X#	X#	T#	TR	T#	TR
ELEVATION, 25 FT, 1	T#	#R	T#	TR	X#	X#	T#	TR	T#	#R
POINT TYPE, 1	T#	TR	T#	TR	X#	X#	T#	TR	T#	TR
POINT NUMBER	NN	NN	NN	NN	X#	X#	NN	NN	NN	NN
J12.0C4 DATA ELEMENT FOR ASO ONLY										
TARGET TYPE	X#	X#	T#	TR	X#	X#	T#	TR	T#	TR
TARGET DEFENSES	X#	X#	T#	TR	X#	X#	##	#R	T#	#R
RUN IN HEADING	X#	X#	##	##	X#	X#	##	##	##	##
EGRESS HEADING	X#	X#	##	##	X#	X#	##	##	##	##
NUMBER OF STORES	X#	X#	##	##	X#	X#	##	##	##	##
TYPE OF STORES	X#	X#	##	##	X#	X#	##	##	##	##
MODE OF DELIVERY	X#	X#	#22#	#22#	X#	X#	#22#	#22#	#22#	#22#
TIME DISCRETE	X#	X#	T#	#R	X#	X#	##	#R	T#	#R
MINUTE	X#	X#	T#	#R	X#	X#	##	#R	T#	#R
HOURL	X#	X#	T#	#R	X#	X#	##	#R	T#	#R
J12.0C5 DATA ELEMENT FOR ASO ONLY										
TARGET RANGE	N#	N#	N#	N#	X#	X#	N#	N#	N#	N#
TARGET BEARING	##	##	X#	##	X#	X#	##	##	##	##
DELTA ELEVATION	N#	N#	N#	N#	X#	X#	N#	N#	N#	N#
BEACON CODE	N22#	N22#	N22#	N22#	X#	X#	N22#	N22#	N22#	N22#
LATITUDE, LSB	##	#R	##	#R	X#	X#	##	##	##	#R
LONGITUDE, LSB	##	#R	##	#R	X#	X#	##	##	##	#R
J12.0C6 DATA ELEMENT FOR ASO ONLY										
LASER ILLUMINATOR CODE	X#	X#	X#	X#	X#	X#	##	##	N#	X#
TRACK NUMBER, RELATED 3	X#	X#	X#	X#	X#	X#	T#	#R	##	X#

TABLE A.5-J12.0-3. Data Element Level Minimum Implementation by Mission Assignment Discrete Value
(Sheet 27 of 30)

J12.0C6(continued) DATA ELEMENT	MISSION ASSIGNMENT DISCRETE VALUE									
	40		41		42		43		44	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
INDEX NUMBER, RELATED	X#	X#	X#	X#	X#	X#	N#	TR	##	X#
J12.0C7 DATA ELEMENT FOR ALL MISSION CATEGORIES										
TRACK NUMBER, INDEX ORIGINATOR	N#	##	N#	##	X#	X#	##	##	X#	##
INDEX NUMBER, THIRD PARTY	N#	##	N#	##	X#	X#	##	##	X#	##
ELEVATION ANGLE, 2	##	##	##	##	X#	X#	##	##	X#	##

TABLE A.5-J12.0-3. Data Element Level Minimum Implementation by Mission Assignment Discrete Value
(Sheet 28 of 30)

J12.0I DATA ELEMENT FOR ALL MISSION CATEGORIES	MISSION ASSIGNMENT DISCRETE VALUE									
	45		46		47		48-62		63	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
TRACK NUMBER, ADDRESSEE	T#	TR	T#	XR	T#	XR	XX	XX	T#	TR
TRACK NUMBER, OBJECTIVE	NN	NN	T#	XR	T#	XR	XX	XX	T#	TR
THREAT WARNING ENVIRONMENT	##	##	##	X#	##	X#	XX	XX	##	##
RECEIPT/COMPLIANCE	T#	TR	T#	XR	T#	XR	XX	XX	T#	TR
RECURRENCE RATE, RECEIPT/ COMPLIANCE	T#	TR	T#	XR	T#	XR	XX	XX	T#	TR
J12.0C1 DATA ELEMENT FOR ALL EXCEPT ASO										
STRENGTH	X#	X#	T#	X#	T#	X#	XX	XX	X#	##
ENVIRONMENT/CATEGORY	X#	X#	T#	X#	T#	X#	XX	XX	X#	##
ORIGIN OF INDEX NUMBER	X#	X#	N40#	X#	N40#	X#	XX	XX	X#	T#
INDEX NUMBER	X#	X#	N#	X#	N#	X#	XX	XX	X#	T#
LATITUDE, 0.0103 MINUTE	X#	X#	T#	XR	T#	XR	XX	XX	X#	##
LONGITUDE, 0.0103 MINUTE	X#	X#	T#	XR	T#	XR	XX	XX	X#	##
J12.0C2 DATA ELEMENT FOR ALL MISSION CATEGORIES										
METHOD OF FIRE	XX	XX	XX	XX	XX	XX	XX	XX	NN	XN
COURSE	X#	X#	T#	XR	T#	XR	XX	XX	X#	X#
SPEED	X#	X#	T#	XR	T#	XR	XX	XX	X#	X#
ALTITUDE, 100 FT	X#	X#	T#	XR	T#	XR	XX	XX	X#	X#
IDENTITY	X#	X#	T#	XR	T#	XR	XX	XX	X#	X#
IDENTITY AMPLIFYING DESCRIPTOR	X#	X#	T#	XR	T#	XR	XX	XX	X#	X#
EXERCISE INDICATOR	X#56	X#56	T#56	XR	T#56	XR	XX	XX	X#56	X#56
SPACE SPECIFIC TYPE	X#53	X#53	##	X#	##	X#	XX	XX	X#	X#
AIR SPECIFIC TYPE	X#53	X#53	T#	X#	T#	X#	XX	XX	X#	X#
SURFACE (MARITIME) SPECIFIC TYPE	X#53	X#53	##	X#	##	X#	XX	XX	X#	X#
SUBSURFACE (MARITIME) SPECIFIC TYPE	X#53	X#53	##	X#	##	X#	XX	XX	X#	X#
LAND (GROUND) SPECIFIC TYPE	X#53	X#53	##	X#	##	X#	XX	XX	X#	X#
SPECIAL INTEREST INDICATOR	X#	X#	##	X#	##	X#	XX	XX	X#	X#

A-217

APPENDIX A

MIL-STD-6016B

TABLE A.5-J12.0-3. Data Element Level Minimum Implementation by Mission Assignment Discrete Value
(Sheet 29 of 30)

J12.0C3 DATA ELEMENT	MISSION ASSIGNMENT DISCRETE VALUE									
	45		46		47		48-62		63	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
LATITUDE, 0.0013 MINUTE	X#	X#	##	X#	##	X#	XX	XX	X#	X#
LONGITUDE, 0.0013 MINUTE	X#	X#	##	X#	##	X#	XX	XX	X#	X#
ELEVATION, 25 FT, 1	X#	X#	##	X#	##	X#	XX	XX	X#	X#
POINT TYPE, 1	X#	X#	##	X#	##	X#	XX	XX	X#	X#
POINT NUMBER	X#	X#	NN	X#	NN	X#	XX	XX	X#	X#
J12.0C4 DATA ELEMENT FOR ASO ONLY										
TARGET TYPE	X#	X#	X#	X#	X#	X#	XX	XX	X#	X#
TARGET DEFENSES	X#	X#	X#	X#	X#	X#	XX	XX	X#	X#
RUN IN HEADING	X#	X#	X#	X#	X#	X#	XX	XX	X#	X#
EGRESS HEADING	X#	X#	X#	X#	X#	X#	XX	XX	X#	X#
NUMBER OF STORES	X#	X#	X#	X#	X#	X#	XX	XX	X#	X#
TYPE OF STORES	X#	X#	X#	X#	X#	X#	XX	XX	X#	X#
MODE OF DELIVERY	X#	X#	X#	X#	X#	X#	XX	XX	X#	X#
TIME DISCRETE	X#	X#	X#	X#	X#	X#	XX	XX	X#	X#
MINUTE	X#	X#	X#	X#	X#	X#	XX	XX	X#	X#
HOURL	X#	X#	X#	X#	X#	X#	XX	XX	X#	X#
J12.0C5 DATA ELEMENT FOR ASO ONLY										
TARGET RANGE	X#	X#	N#	N#	N#	N#	XX	XX	X#	X#
TARGET BEARING	X#	X#	##	##	##	##	XX	XX	X#	X#
DELTA ELEVATION	X#	X#	N#	N#	N#	N#	XX	XX	X#	X#
BEACON CODE	X#	X#	N22#	N22#	N22#	N22#	XX	XX	X#	X#
LATITUDE, LSB	X#	X#	N#	N#	N#	N#	XX	XX	X#	X#
LONGITUDE, LSB	X#	X#	N#	N#	N#	N#	XX	XX	X#	X#
J12.0C6 DATA ELEMENT FOR ASO ONLY										
LASER ILLUMINATOR CODE	X#	X#	X#	X#	X#	X#	XX	XX	X#	X#
TRACK NUMBER, RELATED 3	X#	X#	X#	X#	X#	X#	XX	XX	X#	X#

TABLE A.5-J12.0-3. Data Element Level Minimum Implementation by Mission Assignment Discrete Value
(Sheet 30 of 30)

J12.0C6(continued) DATA ELEMENT	MISSION ASSIGNMENT DISCRETE VALUE									
	45		46		47		48-62		63	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
INDEX NUMBER, RELATED	X#	X#	X#	X#	X#	X#	XX	XX	X#	X#
J12.0C7 DATA ELEMENT FOR ALL MISSION CATEGORIES										
TRACK NUMBER, INDEX ORIGINATOR	X#	X#	N#	X#	N#	X#	XX	XX	X#	X#
INDEX NUMBER, THIRD PARTY	X#	X#	N#	X#	N#	X#	XX	XX	X#	X#
ELEVATION ANGLE, 2	X#	X#	##	X#	##	X#	XX	XX	X#	X#

MIL-STD-6016B

APPENDIX A

THIS PAGE INTENTIONALLY LEFT BLANK

APPENDIX A

J12.1 Word, Data Element, and Data Item Minimum Implementation

To determine the words, data elements, and data items in the J12.1 message that are required for implementation, first, enter Table J12.1-1 from the top at a Mission Category that will be implemented by a C² JU or a nonC² JU to determine the implementation requirements for each action value. Next, enter Table J12.1-2 from the left at an action value that will be implemented. Proceed across the row to determine the required word implementation for a C² JU or a nonC² JU. Then, enter Table J12.1-3 from the top at an action value that will be implemented by a C² JU or a nonC² JU. Proceed down the column to determine the required data element implementation for each word. At each level, the transmit and receive requirements are considered separately, with no interaction between them.

TABLE A.5-J12.1-1. Vector Discrete Value Minimum Implementation by Mission Category (Sheet 1 of 2)

VECTOR DISCRETE VALUE	MISSION CATEGORIES					
	ATC		AIC		ASO	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
0 - NO STATEMENT	##	X#	##	X#	##	X#
1 - TO WAYPOINT	##	X#	##	X#	##	X#
2 - ALTITUDE CHANGE WARNING	##	X#	##	X#	##	X#
3 - SPEED CHANGE WARNING	##	X#	##	X#	##	X#
4 - COURSE CHANGE WARNING	##	X#	##	X#	##	X#
5 - COMMAND CONTROL	T#	XR	T#	XR	T#	XR
6 - UNDEFINED	XX	XX	XX	XX	XX	XX
7 - REVERT TO VOICE	T#	XR	T#	XR	T#	XR
8 - LANDING CHECKLIST	##	X#	X#	X#	X#	X#
9 - COMMAND COURSE CHANGE	##	X#	##	X#	##	X#
10 - COMMAND ALTITUDE CHANGE	##	X#	##	X#	##	X#
11 - COMMAND SPEED CHANGE	##	X#	##	X#	##	X#
12 - BUG-OUT HEADING	X#	X#	##	X#	##	X#
13 - CV RECOVERY CASE I	##	X#	X#	X#	X#	X#
14 - CV RECOVERY CASE II	##	X#	X#	X#	X#	X#
15 - CV RECOVERY CASE III	##	X#	X#	X#	X#	X#
16 - FIELD CONDITION VMC	##	X#	##	##	##	##
17 - FIELD CONDITION IMC	##	X#	##	##	##	##
18 - JOIN UP/RENDEZVOUS	##	X#	##	##	##	##
19 - NOT UNDER COMMAND	T#	XR	T#	XR	T#	XR
20 - UNDEFINED	XX	XX	XX	XX	XX	XX
21 - VISUAL/ID TARGET VECTOR	X#	X#	##	##	##	##
22 - COLLISION/CUT OFF VECTOR	X#	X#	T#	XR	X#	X#
23 - PURSUIT VECTOR	X#	X#	T#	XR	X#	X#
24 - STERN VECTOR	X#	X#	T#	XR	X#	X#
25 - ORBIT VECTOR	##	##	##	##	##	##
26 - REFUEL VECTOR	##	X#	##	X#	##	X#
27-63 - UNDEFINED	XX	XX	XX	XX	XX	XX

A-222

APPENDIX A

MIL-STD-6016B

TABLE A.5-J12.1-1. Vector Discrete Value Minimum Implementation by Mission Category (Sheet 2 of 2)

VECTOR DISCRETE VALUE	MISSION CATEGORIES					
	MSL/RPV		SAM UNIT CONT		EW	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
0 - NO STATEMENT	##	X#	X#	X#	X#	X#
1 - TO WAYPOINT	X#	X#	X#	X#	X#	X#
2 - ALTITUDE CHANGE WARNING	X#	X#	X#	X#	X#	X#
3 - SPEED CHANGE WARNING	X#	X#	X#	X#	X#	X#
4 - COURSE CHANGE WARNING	X#	X#	X#	X#	X#	X#
5 - COMMAND CONTROL	X#	X#	X#	X#	X#	X#
6 - UNDEFINED	XX	XX	XX	XX	XX	XX
7 - REVERT TO VOICE	X#	X#	X#	X#	X#	X#
8 - LANDING CHECKLIST	X#	X#	X#	X#	X#	X#
9 - COMMAND COURSE CHANGE	X#	X#	X#	X#	X#	X#
10 - COMMAND ALTITUDE CHANGE	X#	X#	X#	X#	X#	X#
11 - COMMAND SPEED CHANGE	X#	X#	X#	X#	X#	X#
12 - BUG-OUT HEADING	X#	X#	X#	X#	X#	X#
13 - CV RECOVERY CASE I	X#	X#	X#	X#	X#	X#
14 - CV RECOVERY CASE II	X#	X#	X#	X#	X#	X#
15 - CV RECOVERY CASE III	X#	X#	X#	X#	X#	X#
16 - FIELD CONDITION VMC	X#	X#	X#	X#	X#	X#
17 - FIELD CONDITION IMC	X#	X#	X#	X#	X#	X#
18 - JOIN UP/RENDEZVOUS	X#	X#	X#	X#	X#	X#
19 - NOT UNDER COMMAND	X#	X#	X#	X#	X#	X#
20 - UNDEFINED	XX	XX	XX	XX	XX	XX
21 - VISUAL/ID TARGET VECTOR	X#	X#	X#	X#	X#	X#
22 - COLLISION/CUT OFF VECTOR	X#	X#	X#	X#	X#	X#
23 - PURSUIT VECTOR	X#	X#	X#	X#	X#	X#
24 - STERN VECTOR	X#	X#	X#	X#	X#	X#
25 - ORBIT VECTOR	X#	X#	X#	X#	X#	X#
26 - REFUEL VECTOR	X#	X#	X#	X#	X#	X#
27-63 - UNDEFINED	XX	XX	XX	XX	XX	X#

MIL-STD-6016B

APPENDIX A

TABLE A.5-J12.1-2. Word Level Minimum Implementation by Vector Discrete Value

VECTOR DISCRETE VALUE	J12.1 WORDS			
	J12.1I		J12.1E0	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU
0 - NO STATEMENT	T#	XR	XX	XX
1 - TO WAYPOINT	T#	XR	##	XR
2 - ALTITUDE CHANGE WARNING	T#	XR	X#	X#
3 - SPEED CHANGE WARNING	T#	XR	X#	X#
4 - COURSE CHANGE WARNING	T#	XR	X#	X#
5 - COMMAND CONTROL	T#	XR	T#	XR
6 - UNDEFINED	XX	XX	XX	XX
7 - REVERT TO VOICE	T#	XR	T#	XR
8 - LANDING CHECKLIST	T#	XR	X#	X#
9 - COMMAND COURSE CHANGE	T#	XR	T#	XR
10 - COMMAND ALTITUDE CHANGE	T#	XR	T#	XR
11 - COMMAND SPEED CHANGE	T#	XR	T#	XR
12 - BUG-OUT HEADING	T#	XR	X#	X#
13 - CV RECOVERY CASE I	T#	XR	##	XR
14 - CV RECOVERY CASE II	T#	XR	##	XR
15 - CV RECOVERY CASE III	T#	XR	##	XR
16 - FIELD CONDITION VMC	T#	XR	##	XR
17 - FIELD CONDITION IMC	T#	XR	##	XR
18 - JOIN UP/RENDEZVOUS	T#	XR	##	XR
19 - NOT UNDER COMMAND	T#	XR	T#	XR
20 - UNDEFINED	XX	XX	XX	XX
21 - VISUAL/ID TARGET VECTOR	T#	XR	##	XR
22 - COLLISION/CUT OFF VECTOR	T#	XR	##	XR
23 - PURSUIT VECTOR	T#	XR	##	XR
24 - STERN VECTOR	T#	XR	##	XR
25 - ORBIT VECTOR	T#	XR	T#	XR
26 - REFUEL VECTOR	T#	XR	T#	XR
27-63 - UNDEFINED	XX	XX	XX	XX

TABLE A.5-J12.1-3. Data Element Level Minimum Implementation by Vector Discrete Value (Sheet 1 of 5)

J12.1I DATA ELEMENT	VECTOR DISCRETE VALUE							
	0		1		2		3	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
TRACK NUMBER, ADDRESSEE	T#	XR	T#	XR	T#	XR	T#	XR
COURSE	T#	XR	T#	XR	##	X#	##	X#
ALTITUDE, 25 FT	T#	XR	T#	XR	T#	XR	##	X#
SPEED	T#	XR	T#	XR	##	X#	T#	XR
J12.1E0 DATA ELEMENT								
TIME TO INTERCEPT	X#	X#	##	##	X#	X#	X#	X#
RECEIPT/COMPLIANCE	X#	X#	##	XR	X#	X#	X#	X#
RECURRENCE RATE, RECEIPT/COMPLIANCE	X#	X#	##	XR	X#	X#	X#	X#

J12.1I DATA ELEMENT	VECTOR DISCRETE VALUE							
	4		5		6		7	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
TRACK NUMBER, ADDRESSEE	T#	XR	T#	XR	XX	XX	T#	XR
COURSE	T#	XR	T#	XR	XX	XX	T#	XR
ALTITUDE, 25 FT	##	X#	T#	XR	XX	XX	T#	XR
SPEED	##	X#	T#	XR	XX	XX	T#	XR
J12.1E0 DATA ELEMENT								
TIME TO INTERCEPT	X#	X#	##	X#	XX	XX	NN	NN
RECEIPT/COMPLIANCE	X#	X#	T#	XR	XX	XX	T#	XR
RECURRENCE RATE, RECEIPT/COMPLIANCE	X#	X#	T#	XR	XX	XX	T#	XR

TABLE A.5-J12.1-3. Data Element Level Minimum Implementation by Vector Discrete Value (Sheet 2 of 5)

<u>J12.1I</u> DATA ELEMENT	VECTOR DISCRETE VALUE							
	8		9		10		11	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
TRACK NUMBER, ADDRESSEE	T#	XR	T#	XR	T#	XR	T#	XR
COURSE	T#	XR	T#	XR	##	X#	##	X#
ALTITUDE, 25 FT	T#	XR	##	X#	T#	XR	##	X#
SPEED	T#	XR	##	X#	##	X#	T#	XR
<u>J12.1E0</u> DATA ELEMENT								
TIME TO INTERCEPT	X#	X#	##	X#	##	X#	##	X#
RECEIPT/COMPLIANCE	X#	X#	T#	XR	T#	XR	T#	XR
RECURRENCE RATE, RECEIPT/COMPLIANCE	X#	X#	T#	XR	T#	XR	T#	XR

TABLE A.5-J12.1-3. Data Element Level Minimum Implementation by Vector Discrete Value (Sheet 3 of 5)

<u>J12.1I</u> DATA ELEMENT	VECTOR DISCRETE VALUE							
	12		13		14		15	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
TRACK NUMBER, ADDRESSEE	T#	XR	T#	XR	T#	XR	T#	XR
COURSE	T#	XR	T#	XR	T#	XR	T#	XR
ALTITUDE, 25 FT	T#	XR	T#	XR	T#	XR	T#	XR
SPEED	T#	XR	T#	XR	T#	XR	T#	XR
<u>J12.1E0</u> DATA ELEMENT								
TIME TO INTERCEPT	X#	X#	NN	XN	NN	XN	NN	XN
RECEIPT/COMPLIANCE	X#	X#	##	XR	##	XR	##	XR
RECURRENCE RATE, RECEIPT/COMPLIANCE	X#	X#	##	XR	##	XR	##	XR

<u>J12.1I</u> DATA ELEMENT	VECTOR DISCRETE VALUE							
	16		17		18		19	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
TRACK NUMBER, ADDRESSEE	T#	XR	T#	XR	T#	XR	T#	XR
COURSE	T#	XR	T#	XR	T#	XR	NN	XN
ALTITUDE, 25 FT	T#	XR	T#	XR	T#	XR	N23N23	XN23
SPEED	T#	XR	T#	XR	T#	XR	NN	XN
<u>J12.1E0</u> DATA ELEMENT								
TIME TO INTERCEPT	NN	XN	NN	XN	##	X#	##	X#
RECEIPT/COMPLIANCE	##	XR	##	XR	##	XR	T#	XR
RECURRENCE RATE, RECEIPT/COMPLIANCE	##	XR	##	XR	##	XR	T#	XR

TABLE A.5-J12.1-3. Data Element Level Minimum Implementation by Vector Discrete Value (Sheet 4 of 5)

<u>J12.1I</u> DATA ELEMENT	VECTOR DISCRETE VALUE							
	20		21		22		23	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
TRACK NUMBER, ADDRESSEE	XX	XX	T#	XR	T#	XR	T#	XR
COURSE	XX	XX	T#	XR	T#	XR	T#	XR
ALTITUDE, 25 FT	XX	XX	T#	XR	T#	XR	T#	XR
SPEED	XX	XX	T#	XR	T#	XR	T#	XR
<u>J12.1E0</u> DATA ELEMENT								
TIME TO INTERCEPT	XX	XX	##	X#	##	X#	##	X#
RECEIPT/COMPLIANCE	XX	XX	##	XR	##	XR	##	XR
RECURRENCE RATE, RECEIPT/COMPLIANCE	XX	XX	##	XR	##	XR	##	XR

TABLE A.5-J12.1-3. Data Element Level Minimum Implementation by Vector Discrete Value (Sheet 5 of 5)

<u>J12.1I</u> DATA ELEMENT	VECTOR DISCRETE VALUE							
	24		25		26		27-63	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
TRACK NUMBER, ADDRESSEE	T#	XR	T#	XR	T#	XR	XX	XX
COURSE	T#	XR	T#	XR	T#	XR	XX	XX
ALTITUDE, 25 FT	T#	XR	T#	XR	T#	XR	XX	XX
SPEED	T#	XR	T#	XR	T#	XR	XX	XX
<u>J12.1E0</u> DATA ELEMENT								
TIME TO INTERCEPT	##	X#	##	X#	##	X#	XX	XX
RECEIPT/COMPLIANCE	##	XR	T#	XR	T#	XR	XX	XX
RECURRENCE RATE, RECEIPT/COMPLIANCE	##	XR	T#	XR	T#	XR	XX	XX

MIL-STD-6016B

APPENDIX A

THIS PAGE INTENTIONALLY LEFT BLANK

APPENDIX A

J12.2 Word, Data Element, and Data Item Minimum Implementation

To determine the words, data elements, and data items in the J12.2 message that are required for implementation, first, enter Table A.5-J12.2-1 from the top at a Mission Category that will be implemented by a C² JU or a nonC² JU to determine the implementation requirements for each action value. Next, enter Table A.5-J12.2-2 from the left at an action value that will be implemented. Proceed across the row to determine the required word implementation for a C² JU or a nonC² JU. Then, enter Table A.5-J12.2-3 from the top at an action value that will be implemented by a C² JU or a nonC² JU. Proceed down the column to determine the required data element implementation for the A.5-J12.2I word. At each level, the transmit and receive requirements are considered separately, with no interaction between them.

TABLE A.5-J12.2-1. Precision Aircraft Direction Discrete Value Minimum Implementation by Mission Category

PRECISION AIRCRAFT DIRECTION DISCRETE VALUE	MISSION CATEGORIES					
	ATC		AIC		ASO	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
0 - NO STATEMENT	T#	XR	X#	X#	T#	XR
1 - PRECISION RADAR READY	T#	XR	X#	X#	T#	XR
2 - UNDER PRECISION CONTROL	T#	XR	X#	X#	T#	XR
3 - 10 SECONDS TO GO	##	X#	X#	X#	##	X#
4 - NOT UNDER COMMAND	T#	XR	X#	X#	T#	XR
5 - REVERT TO VOICE	T#	XR	X#	X#	T#	XR
6 - WAVE OFF	T#	XR	X#	X#	T#	XR
7 - BEACON ON	##	X#	X#	X#	##	X#
8 - LANDING CHECKLIST	##	X#	X#	X#	X#	X#
9-15 - UNDEFINED	XX	XX	XX	XX	XX	XX

PRECISION AIRCRAFT DIRECTION DISCRETE VALUE	MISSION CATEGORIES					
	MSL/RPV		SAM UNIT CONT		EW	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
0 - NO STATEMENT	T#	XR	X#	X#	X#	X#
1 - PRECISION RADAR READY	X#	X#	X#	X#	X#	X#
2 - UNDER PRECISION CONTROL	X#	X#	X#	X#	X#	X#
3 - 10 SECONDS TO GO	X#	X#	X#	X#	X#	X#
4 - NOT UNDER COMMAND	X#	X#	X#	X#	X#	X#
5 - REVERT TO VOICE	X#	X#	X#	X#	X#	X#
6 - WAVE OFF	X#	X#	X#	X#	X#	X#
7 - BEACON ON	X#	X#	X#	X#	X#	X#
8 - LANDING CHECKLIST	X#	X#	X#	X#	X#	X#
9-15 - UNDEFINED	XX	XX	XX	XX	XX	XX

MIL-STD-6016B

APPENDIX A

TABLE A.5-J12.2-2. Word Level Minimum Implementation by Precision Aircraft Direction Discrete Value

PRECISION AIRCRAFT DIRECTION DISCRETE VALUE	J12.2 WORDS	
	J12.2I	
	C ² JU	NONC ² JU
0 - NO STATEMENT	T#	XR
1 - PRECISION RADAR READY	T#	XR
2 - UNDER PRECISION CONTROL	T#	XR
3 - 10 SECONDS TO GO	T#	XR
4 - NOT UNDER COMMAND	T#	XR
5 - REVERT TO VOICE	T#	XR
6 - WAVE OFF	T#	XR
7 - BEACON ON	T#	XR
8 - LANDING CHECKLIST	T#	XR
9-15 - UNDEFINED	XX	XX

TABLE A.5-J12.2-3. Data Element Level Minimum Implementation by Precision Aircraft Direction Discrete Value

J12.2I DATA ELEMENT	PRECISION AIRCRAFT DIRECTION DISCRETE VALUE									
	0		1		2		3		4	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
TRACK NUMBER, ADDRESSEE	T#	XR	T#	XR	T#	XR	T#	XR	T#	XR
VERTICAL CONTROL COMMAND	T#	XR37	T#	XR37	T#	XR37	T#	XR37	T#	XR37
VERTICAL ERROR	T#	XR37	T#	XR37	T#	XR37	T#	XR37	T#	XR37
LATERAL ERROR	T#	XR37	T#	XR37	T#	XR37	T#	XR37	T#	XR37
LATERAL CONTROL COMMAND	T#	XR37	T#	XR37	T#	XR37	T#	XR37	T#	XR37
TIME-TO-GO	T#	XR	T#	XR	T#	XR	T#	XR	T#	XR
AUTOPILOT CONTROL BIT	T#	XR38	T#	XR38	T#	XR38	T#	XR38	T#	XR38
DROP DISCRETE	T39#	XR39	T39#	XR39	T39#	XR39	T39#	XR39	T39#	XR39

J12.2I DATA ELEMENT	PRECISION AIRCRAFT DIRECTION DISCRETE VALUE									
	5		6		7		8		9-15	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
TRACK NUMBER, ADDRESSEE	T#	XR	T#	XR	T#	XR	T#	XR	XX	XX
VERTICAL CONTROL COMMAND	T#	XR37	T#	XR37	T#	XR37	T#	XR37	XX	XX
VERTICAL ERROR	T#	XR37	T#	XR37	T#	XR37	T#	XR37	XX	XX
LATERAL ERROR	T#	XR37	T#	XR37	T#	XR37	T#	XR37	XX	XX
LATERAL CONTROL COMMAND	T#	XR37	T#	XR37	T#	XR37	T#	XR37	XX	XX
TIME-TO-GO	T#	XR	T#	XR	T#	XR	T#	XR	XX	XX
AUTOPILOT CONTROL BIT	T#	XR38	T#	XR38	T#	XR38	T#	XR38	XX	XX
DROP DISCRETE	T39#	XR39	T39#	XR39	T39#	XR39	T39#	XR39	XX	XX

APPENDIX A

J12.3 Word, Data Element, and Data Item Minimum Implementation

To determine the words, data elements, and data items in the J12.3 message that are required for implementation, first, enter Table A.5-J12.3-1 from the top at a Mission Category that will be implemented by a C² JU or a nonC² JU to determine the implementation requirements for each action value. Next, enter Table A.5-J12.3-2 from the left at an action value that will be implemented. Proceed across the row to determine the required word implementation for a C² JU or a nonC² JU. Then, enter Table A.5-J12.3-3 from the top at an action value that will be implemented by a C² JU or a nonC² JU. Proceed down the column to determine the required data element implementation for each word. At each level, the transmit and receive requirements are considered separately, with no interaction between them.

TABLE A.5-J12.3-1. Waypoint Action/Descriptor Value Minimum Implementation by Mission Category

WAYPOINT ACTION/DESCRIPTOR VALUE	MISSION CATEGORIES					
	ATC		AIC		ASO	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
0 - ORIGINAL POINT	##	X#	##	X#	T#	XR
1 - REPLACEMENT POINT	##	X#	##	X#	##	X#
2 - CANCEL POINT	##	X#	##	X#	##	X#
3 - LAST POINT IN SERIES	##	X#	##	X#	T#	XR
4 - ORBIT THIS POINT	##	X#	##	X#	##	X#
5 - RESTRICTED AREA BOUNDARY	##	X#	##	X#	##	X#
6 - TARGET	X#	X#	X#	X#	X#	X#
7 - UNDEFINED	XX	XX	XX	XX	XX	XX
8 - ALL POINTS RECEIVED	X#	##	X#	##	XR	T#
9 - LOST POINT	X#	##	X#	##	XR	T#
10 - PILOT CANNOT COMPLY	X#	##	X#	##	X#	##
11 - PILOT WILL COMPLY	X#	##	X#	##	X#	##
12-15 - UNDEFINED	XX	XX	XX	XX	XX	XX

WAYPOINT ACTION/DESCRIPTOR VALUE	MISSION CATEGORIES					
	MSL/RPV		SAM UNIT CONT		EW	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
0 - ORIGINAL POINT	T#	XR	X#	X#	X#	X#
1 - REPLACEMENT POINT	X#	X#	X#	X#	X#	X#
2 - CANCEL POINT	X#	X#	X#	X#	X#	X#
3 - LAST POINT IN SERIES	X#	X#	X#	X#	X#	X#
4 - ORBIT THIS POINT	X#	X#	X#	X#	X#	X#
5 - RESTRICTED AREA BOUNDARY	X#	X#	X#	X#	X#	X#
6 - TARGET	T#	XR	X#	X#	X#	X#
7 - UNDEFINED	XX	XX	XX	XX	XX	XX
8 - ALL POINTS RECEIVED	X#	X#	X#	X#	X#	X#
9 - LOST POINT	X#	X#	X#	X#	X#	X#
10 - PILOT CANNOT COMPLY	X#	X#	X#	X#	X#	X#
11 - PILOT WILL COMPLY	X#	X#	X#	X#	X#	X#
12-15 - UNDEFINED	XX	XX	XX	XX	XX	T#

MIL-STD-6016B

APPENDIX A

TABLE A.5-J12.3-2. Word Level Minimum Implementation by Waypoint Action/Descriptor Value

WAYPOINT ACTION/DESCRIPTOR VALUE	J12.3 WORDS			
	J12.3I		J12.3E0	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU
0 - ORIGINAL POINT	T#	XR	T#	XR
1 - REPLACEMENT POINT	T#	XR	T#	XR
2 - CANCEL POINT	T#	XR	T#	XR
3 - LAST POINT IN SERIES	T#	XR	T#	XR
4 - ORBIT THIS POINT	T#	XR	T#	XR
5 - RESTRICTED AREA BOUNDARY	T#	XR	T#	XR
6 - TARGET	T#	XR	T#	XR
7 - UNDEFINED	XX	XX	XX	XX
8 - ALL POINTS RECEIVED	XR	T#	X#	X#
9 - LOST POINT	XR	T#	X#	X#
10 - PILOT CANNOT COMPLY	XR	T#	X#	X#
11 - PILOT WILL COMPLY	XR	T#	X#	X#
12-15 - UNDEFINED	XX	XX	XX	XX

TABLE A.5-J12.3-3. Data Element Level Minimum Implementation by Waypoint Action/Descriptor Value (Sheet 1 of 2)

J12.3I DATA ELEMENT	WAYPOINT ACTION/DESCRIPTOR VALUE									
	0		1		2		3		4	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
TRACK NUMBER, ADDRESSEE	T#	XR	T#	XR	T#	XR	T#	XR	T#	XR
SEQUENCE NUMBER	T#	XR	T#	XR	T#	XR	T#	XR	T#	XR
MINUTE	##	X#	##	X#	##	X#	##	X#	##	X#
HOURL	##	X#	##	X#	##	X#	##	X#	##	X#
TIME FUNCTION	##	X#	##	X#	##	X#	##	X#	##	X#
TOTAL POINTS IN SERIES	T#	XR	T#	XR	T#	XR	T#	XR	T#	XR
J12.3E0 DATA ELEMENT										
LATITUDE, 0.0013 MINUTE	T#	XR	T#	XR	T#	XR	T#	XR	T#	XR
LONGITUDE, 0.0013 MINUTE	T#	XR	T#	XR	T#	XR	T#	XR	T#	XR
ALTITUDE, 25 FT	T#	XR	T#	XR	T#	XR	T#	XR	T#	XR
ALTITUDE AMPLIFICATION	T#	XR	T#	XR	T#	XR	T#	XR	T#	XR

J12.3I DATA ELEMENT	WAYPOINT ACTION/DESCRIPTOR VALUE									
	5		6		7		8		9	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
TRACK NUMBER, ADDRESSEE	T#	XR	T#	XR	XX	XX	XR	T#	XR	T#
SEQUENCE NUMBER	T#	XR	T#	XR	XX	XX	XN	NN	XR	T#
MINUTE	##	X#	N#	XN	XX	XX	XN	N#	XN	N#
HOURL	##	X#	N#	XN	XX	XX	XN	N#	XN	N#
TIME FUNCTION	##	X#	N#	XN	XX	XX	XN	N#	XN	N#
TOTAL POINTS IN SERIES	T#	XR	T#	XR	XX	XX	XN	N#	XN	N#
J12.3E0 DATA ELEMENT										
LATITUDE, 0.0013 MINUTE	T#	XR	T#	XR	XX	XX	X#	X#	X#	X#
LONGITUDE, 0.0013 MINUTE	T#	XR	T#	XR	XX	XX	X#	X#	X#	X#
ALTITUDE, 25 FT	T#	XR	T#	XR	XX	XX	X#	X#	X#	X#
ALTITUDE AMPLIFICATION	T#	XR	T#	XR	XX	XX	X#	X#	X#	X#

TABLE A.5-J12.3-3. Data Element Level Minimum Implementation by Waypoint Action/Descriptor Value (Sheet 2 of 2)

J12.3I DATA ELEMENT	WAYPOINT ACTION/DESCRIPTOR VALUE					
	10		11		12-15	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
TRACK NUMBER, ADDRESSEE	XR	T#	XR	T#	XX	XX
SEQUENCE NUMBER	X#	##	X#	##	XX	XX
MINUTE	XN	N#	XN	N#	XX	XX
HOUR	XN	N#	XN	N#	XX	XX
TIME FUNCTION	XN	N#	XN	N#	XX	XX
TOTAL POINTS IN SERIES	XN	N#	XN	N#	XX	XX
J12.3E0 DATA ELEMENT						
LATITUDE, 0.0013 MINUTE	X#	X#	X#	X#	XX	XX
LONGITUDE, 0.0013 MINUTE	X#	X#	X#	X#	XX	XX
ALTITUDE, 25 FT	X#	X#	X#	X#	XX	XX
ALTITUDE AMPLIFICATION	X#	X#	X#	X#	XX	XX

MIL-STD-6016B

APPENDIX A

THIS PAGE INTENTIONALLY LEFT BLANK

APPENDIX A

J12.4 Word, Data Element, and Data Item Minimum Implementation

To determine the words, data elements, and data items in the J12.4 message that are required for implementation, first, enter Table A.5-J12.4-1 from the top at a Mission Category that will be implemented by a C² JU or a nonC² JU to determine the implementation requirements for each action value. Next, enter Table A.5-J12.4-2 from the left at an action value that will be implemented. Proceed across the row to determine the required word implementation for a C² JU or a nonC² JU. Then, enter Table A.5-J12.4-3 from the top at an action value that will be implemented by a C² JU or a nonC² JU. Proceed down the column to determine the required data element implementation for each word. At each level, the transmit and receive requirements are considered separately, with no interaction between them.

TABLE A.5-J12.4-1. Control Change Indicator Value Minimum Implementation by Mission Category

CONTROL CHANGE INDICATOR VALUE	MISSION CATEGORIES					
	ATC		AIC		ASO	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
0 - CONTROL CHANGE ORDER	T#	XR	T#	XR	T#	XR
1 - CONTROL REQUEST	XR	T#	XR	T#	XR	T#
2 - TERMINATE CONTROL	T#	XR	T#	XR	T#	XR
3 - UNDEFINED	XX	XX	XX	XX	XX	XX

CONTROL CHANGE INDICATOR VALUE	MISSION CATEGORIES					
	MSL/RPV		SAM UNIT CONT		EW	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU	C ² JU	NONC ² JU
0 - CONTROL CHANGE ORDER	T#	XR	##	X#	X#	X#
1 - CONTROL REQUEST	XR	##	X#	##	X#	X#
2 - TERMINATE CONTROL	T#	XR	##	X#	X#	X#
3 - UNDEFINED	XX	XX	XX	XX	XX	XX

MIL-STD-6016B

APPENDIX A

TABLE A.5-J12.4-2. Word Level Minimum Implementation by Control Change Indicator Value

CONTROL CHANGE INDICATOR VALUE	J12.4 WORDS			
	J12.4I		J12.4E0	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU
0 - CONTROL CHANGE ORDER	T#	XR	T#	XR
1 - CONTROL REQUEST	XR	T#	X#	X#
2 - TERMINATE CONTROL	T#	XR	X#	X#
3 - UNDEFINED	XX	XX	XX	XX

TABLE A.5-J12.4-3. Data Element Level Minimum Implementation by Control Change Indicator Value (Sheet 1 of 2)

<u>J12.4I</u> <u>DATA ELEMENT</u>	CONTROL CHANGE INDICATOR VALUE			
	0		1	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU
TRACK NUMBER, ADDRESSEE	T#	XR	XR	T#
TRACK NUMBER, NEW CONTROL AGENCY	T#	XR	XN	NN
CONTROL CHANNEL	T#	XR	XN	NN
RADIO TYPE	##	X#	XN	NN
SECURE RADIO INDICATOR	T#	XR	XN	NN
RECEIPT/COMPLIANCE	T#	XR	XR	T#
RECURRENCE RATE, RECEIPT/COMPLIANCE	T#	XR	XR	T#
<u>J12.4E0</u> <u>DATA ELEMENT</u>				
VOICE FREQUENCY/CHANNEL INDICATOR	#22#	X#	X#	X#
VOICE CALL SIGN, NEW CONTROL AGENCY	#22#	X#	X#	X#
LINK 4A FREQUENCY	##	X#	X#	X
MODE III CODE, 1	#22#	X#	X#	X#
SQUAWK FLASH INDICATOR	##	X#	X#	X#
VOICE FREQUENCY/CHANNEL	T#	XR	X#	X#

MIL-STD-6016B

APPENDIX A

TABLE A.5-J12.4-3. Data Element Level Minimum Implementation by Control Change Indicator Value (Sheet 2 of 2)

<u>J12.4I</u> <u>DATA ELEMENT</u>	CONTROL CHANGE INDICATOR VALUE			
	2		3	
	C ² JU	NONC ² JU	C ² JU	NONC ² JU
TRACK NUMBER, ADDRESSEE	T#	XR	XX	XX
TRACK NUMBER, NEW CONTROL AGENCY	##	X#	XX	XX
CONTROL CHANNEL	##	X#	XX	XX
RADIO TYPE	##	X#	XX	XX
SECURE RADIO INDICATOR	##	X#	XX	XX
RECEIPT/COMPLIANCE	T#	XR	XX	XX
RECURRENCE RATE, RECEIPT/COMPLIANCE	T#	XR	XX	XX
<u>J12.4E0</u> <u>DATA ELEMENT</u>				
VOICE FREQUENCY/CHANNEL INDICATOR	X#	X#	XX	XX
VOICE CALL SIGN, NEW CONTROL AGENCY	X#	X#	XX	XX
LINK 4A FREQUENCY	X#	X#	XX	XX
MODE III CODE, 1	X#	X#	XX	XX
SQUAWK FLASH INDICATOR	X#	X#	XX	XX
VOICE FREQUENCY/CHANNEL	X#	X#	XX	XX

MIL-STD-6016B

APPENDIX A

TABLE A.5-J12.5. Word, Data Element, and Data Item Minimum Implementation

This message is implemented only when implementing the AIC mission category.

WORD LEVEL

<u>WORD</u>	<u>C² JU</u>	<u>MIN IMP</u> <u>NONC² JU</u>
J12.5I	T#	XR
J12.5E0	##	X#
J12.5E1	##	X#

DATA ELEMENT LEVEL

<u>J12.5I</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u> <u>NONC² JU</u>
TRACK NUMBER, OBJECTIVE	T#	XR
TRACK NUMBER, INDEX ORIGINATOR A	T#	XR
INDEX NUMBER, A	T#	XR
CORRELATION INDICATOR, A	T#	XR
IDENTITY, EVALUATED	#22#	X#
STRENGTH, EVALUATED	##	X#
ID/STRENGTH INDICATOR	#22#	X#

<u>J12.5E0</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u> <u>NONC² JU</u>
TRACK NUMBER, INDEX ORIGINATOR B	T#	XR
INDEX NUMBER, B	T#	XR
CORRELATION INDICATOR, B	T#	XR
TRACK NUMBER, INDEX ORIGINATOR C	##	X#
INDEX NUMBER, C	##	X#
CORRELATION INDICATOR, C	#22#	X#
TRACK NUMBER, INDEX ORIGINATOR D	##	X#
INDEX NUMBER, D	##	X#
CORRELATION INDICATOR, D	#22#	X#

<u>J12.5E1</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u> <u>NONC² JU</u>
TRACK NUMBER, INDEX ORIGINATOR E	T#	XR
INDEX NUMBER, E	T#	XR
CORRELATION INDICATOR, E	T#	XR
TRACK NUMBER, INDEX ORIGINATOR F	##	X#
INDEX NUMBER, F	##	X#
CORRELATION INDICATOR, F	#22#	X#
TRACK NUMBER, INDEX ORIGINATOR G	##	X#
INDEX NUMBER, G	##	X#
CORRELATION INDICATOR, G	#22#	X#

APPENDIX A

J12.6 Word, Data Element, and Data Item Minimum Implementation

To determine the words, data elements, and data items in the J12.6 message that are required for implementation, first, enter Table A.5-J12.6-1 from the top at an Environment/Category (ENV/CAT) that will be implemented by a C² JU or a nonC² JU to determine the implementation requirements for each Status Information Discrete (SID) value for a specific ENV/CAT. Next, enter Table A.5-J12.6-2 from the left at a SID value that will be implemented. Proceed across the row to determine the required word implementation for a C² JU or a nonC² JU. Then, enter Table A.5-J12.6-3 from the top at a SID value that will be implemented by a C² JU or a nonC² JU. Proceed down the column to determine the required data element implementation for each word. At each level, the transmit and receive requirements are considered separately, with no interaction between them.

MIL-STD-6016B

APPENDIX A

Table J12.6-1. Status Information Discrete Value Minimum Implementation by Environment/Category (Sheet 1 of 2)

STATUS INFORMATION DISCRETE VALUE BY ENVIRONMENT/CATEGORY			
ENVIRONMENT/CATEGORY = 0, NO STATEMENT/UNKNOWN		C ² JU	NC ² JU
0 - No Statement		##	##
1-15 - Undefined		XX	XX
ENVIRONMENT/CATEGORY = 1, SPACE; OR, 4, SUBSURFACE (MARITIME)			
0 - No Statement		##	##
1-15 - Undefined		XX	XX
ENVIRONMENT/CATEGORY = 2, AIR			
0 - No Statement		#R	TR
1 - Engaging		XR	TR
2 - Investigating		XR	TR
3 - Missile in Flight/Weapon Released		XR	TR
4 - New Sensor Target Report		XR	TR
5 - Cancel Sensor Target Report		XR	TR
6 - Track/Target Destroyed		XR	TR
7 - Disengaging		XR	TR
8 - Target Partially Destroyed		X#	##
9 - Heads Up		XR	TR
10 - Lock On/Primary Designated Target		XR	TR
11 - Not Effective		X#	##
12 - Covering		X#	##
13 - Investigate		X#	##
14 - Engage		X#	##
15 - Disengage		X#	##

MIL-STD-6016B

APPENDIX A

Table J12.6-1. Status Information Discrete Value Minimum Implementation by Environment/Category (Sheet 2 of 2)

STATUS INFORMATION DISCRETE VALUE		
ENVIRONMENT/CATEGORY = 3, SURFACE (MARITIME)	C ² JU	NC ² JU
0 - No Statement	#R	##
1 - Attacking	XR	TR
2 - Investigating	XR	TR
3 - Missile in Flight/Weapon Released	XR	TR
4 - New Sensor Target Report	XR	##
5 - Cancel Sensor Target Report	XR	##
6 - Track/Target Destroyed	XR	TR
7 - Disengaging	XR	TR
8 - Target Partially Destroyed	XR	T#
9 - Mark Point/Point of Interest	XR	TR
10 - Lock On/Designated Surface Target	XR	TR
11 - Battle Damage Assessment Unknown	XR	T#
12 - Recommend Reattack	XR	T#
13 - Investigate	XX	XX
14 - Engage	XX	XX
15 - Disengage	XX	XX
ENVIRONMENT/CATEGORY = 5, LAND (GROUND)		
0 - No Statement	#R	##
1 - Attacking	XR	TR
2 - Investigating	XR	TR
3 - Missile in Flight/Weapon Released	XR	TR
4 - New Sensor Target Report	XR	##
5 - Cancel Sensor Target Report	XR	##
6 - Track/Target Destroyed	XR	TR
7 - Disengaging	XR	TR
8 - Target Partially Destroyed	XR	T#
9 - Mark Point/Point of Interest	XR	TR
10 - Lock On/Designated Ground Target	XR	TR
11 - Battle Damage Assessment Unknown	XR	T#
12 - Recommend Reattack	XR	T#
13 - Investigate	XX	XX
14 - Engage	XX	XX
15 - Disengage	XX	XX

MIL-STD-6016B

APPENDIX A

Table J12.6-2. Word Level Minimum Implementation by Status Information
Discrete Value by Environment/Category (Sheet 1 of 10)

STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 0, NO STATEMENT/UNKNOWN	J12.6 WORDS					
	J12.6I		J12.6E0		J12.6C1	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
0 - No Statement	TR	TR	XX	XX	TR	TR
1-15 - Undefined	XX	XX	XX	XX	XX	XX

STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 0, NO STATEMENT/UNKNOWN	J12.6 WORDS					
	J12.6C2		J12.6C3		J12.6C4	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
0 - No Statement	XX	XX	XX	XX	XX	XX
1-15 - Undefined	XX	XX	XX	XX	XX	XX

STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 0, NO STATEMENT/UNKNOWN	J12.6 WORDS					
	J12.6C5		J12.6C6		J12.6C7	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
0 - No Statement	XX	XX	XX	XX	XX	XX
1-15 - Undefined	XX	XX	XX	XX	XX	XX

MIL-STD-6016B

APPENDIX A

Table J12.6-2. Word Level Minimum Implementation by Status Information
Discrete Value by Environment/Category (Sheet 2 of 10)

STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 2, AIR	J12.6 WORDS					
	J12.6I		J12.6E0		J12.6C1	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
0 - No Statement	TR	TR	T61R61	T61R61	TR	TR
1 - Engaging	XR	TR	XR	TR	X#	##
2 - Investigating	XR	TR	XR	TR	X#	##
3 - Missile in Flight/Weapon Released	XR	TR	XR	TR	X#	##
4 - New Sensor Target Report	XR	TR	XR	TR	X#	##
5 - Cancel Sensor Target Report	XR	TR	X#	##	X#	##
6 - Track/Target Destroyed	XR	TR	XR	TR	X#	##
7 - Disengaging	XR	TR	XR	TR	X#	##
8 - Target Partially Destroyed	XR	TR	XR	TR	XX	##
9 - Heads Up	XR	TR	XR	TR	X#	##
10 - Lock On/Primary Designated Target	XR	TR	XR	TR	X#	##
11 - Not Effective	XR	TR	XR	TR	XX	##
12 - Covering	XR	TR	XR	TR	X#	##
13 - Investigate	X#	TR	X#	TR	X#	TR
14 - Engage	X#	TR	X#	TR	X#	TR
15 - Disengage	X#	TR	X#	TR	X#	TR

MIL-STD-6016B

APPENDIX A

Table J12.6-2. Word Level Minimum Implementation by Status Information
Discrete Value by Environment/Category (Sheet 3 of 10)

STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 2, AIR	J12.6 WORDS					
	J12.6C2		J12.6C3		J12.6C4	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
0 - No Statement	X#	##	X#	##	X#	##
1 - Engaging	X#	##	X#	##	X#	##
2 - Investigating	X#	##	X#	##	X#	##
3 - Missile in Flight/Weapon Released	X#	##	X#	##	X#	##
4 - New Sensor Target Report	X#	##	X#	##	X#	##
5 - Cancel Sensor Target Report	X#	##	X#	##	X#	##
6 - Track/Target Destroyed	X#	##	X#	##	X#	##
7 - Disengaging	X#	##	X#	##	X#	##
8 - Target Partially Destroyed	XX	XX	XX	XX	XX	XX
9 - Heads Up	X#	##	X#	##	X#	##
10 - Lock On/Primary Designated Target	X#	##	X#	##	X#	##
11 - Not Effective	XX	XX	XX	XX	XX	XX
12 - Covering	X#	##	X#	##	X#	##
13 - Investigate	X#	##	X#	##	X#	##
14 - Engage	X#	##	X#	##	X#	##
15 - Disengage	X#	##	X#	##	X#	##

MIL-STD-6016B

APPENDIX A

Table J12.6-2. Word Level Minimum Implementation by Status Information
Discrete Value by Environment/Category (Sheet 4 of 10)

STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 2, AIR	J12.6 WORDS					
	J12.6C5		J12.6C6		J12.6C7	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
0 - No Statement	X#	##	X#	##	XR	TR
1 - Engaging	X#	##	X#	##	XR	TR
2 - Investigating	X#	##	X#	##	XR	TR
3 - Missile in Flight/Weapon Released	X#	##	X#	##	XR	TR
4 - New Sensor Target Report	X#	##	X#	##	XR	TR
5 - Cancel Sensor Target Report	X#	##	X#	##	XR	TR
6 - Track/Target Destroyed	X#	##	X#	##	XR	TR
7 - Disengaging	X#	##	X#	##	XR	TR
8 - Target Partially Destroyed	XX	XX	XX	XX	XR	TR
9 - Heads Up	X#	##	X#	##	XR	TR
10 - Lock On/Primary Designated Target	X#	##	X#	##	XR	TR
11 - Not Effective	XX	XX	XX	XX	XR	TR
12 - Covering	X#	##	X#	##	XR	TR
13 - Investigate	X#	##	X#	##	XR	TR
14 - Engage	X#	##	X#	##	XR	TR
15 - Disengage	X#	##	X#	##	XR	TR

MIL-STD-6016B

APPENDIX A

Table J12.6-2. Word Level Minimum Implementation by Status Information
Discrete Value by Environment/Category (Sheet 5 of 10)

STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 3, SURFACE (MARITIME)	J12.6 WORDS					
	J12.6I		J12.6E0		J12.6C1	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
0 - No Statement	TR	TR	T61R61	T61R61	TR	TR
1 - Attacking	XR	TR	XR	TR	X#	##
2 - Investigating	XR	TR	XR	TR	X#	##
3 - Missile in Flight/Weapon Released	XR	TR	XR	TR	X#	##
4 - New Sensor Target Report	XR	TR	XR	TR	X#	##
5 - Cancel Sensor Target Report	XR	TR	X#	##	XX	XX
6 - Track/Target Destroyed	XR	TR	XR	TR	XX	XX
7 - Disengaging	XR	TR	XR	TR	XX	XX
8 - Target Partially Destroyed	XR	TR	XR	TR	XX	XX
9 - Heads Up/Mark Point/Point of Interest	XR	TR	XR	TR	XX	XX
10 - Lock On	XR	TR	XR	TR	X#	##
11 - Battle Damage Assessment Unknown	XR	TR	XR	TR	XX	XX
12 - Recommend Reattack	XR	TR	XR	TR	XX	XX
13 - Investigate	XX	XX	XX	XX	XX	XX
14 - Engage	XX	XX	XX	XX	XX	XX
15 - Disengage	XX	XX	XX	XX	XX	XX

MIL-STD-6016B

APPENDIX A

Table J12.6-2. Word Level Minimum Implementation by Status Information
Discrete Value by Environment/Category (Sheet 6 of 10)

STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 3, SURFACE (MARITIME)	J12.6 WORDS					
	J12.6C2		J12.6C3		J12.6C4	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
0 - No Statement	X#	##	X#	##	X#	##
1 - Attacking	X#	##	X#	##	X#	##
2 - Investigating	X#	##	X#	##	X#	##
3 - Missile in Flight/Weapon Released	X#	##	X#	##	X#	##
4 - New Sensor Target Report	X#	##	X#	##	X#	##
5 - Cancel Sensor Target Report	X#	##	X#	##	X#	##
6 - Track/Target Destroyed	XX	XX	XX	XX	XX	XX
7 - Disengaging	X#	##	X#	##	X#	##
8 - Target Partially Destroyed	XX	XX	XX	XX	XX	XX
9 - Mark Point/Point of Interest	XX	XX	XX	XX	XX	XX
10 - Lock On/Designated Surface Target	X#	##	X#	##	X#	##
11 - Battle Damage Assessment Unknown	XX	XX	XX	XX	XX	XX
12 - Recommend Reattack	XX	XX	XX	XX	XX	XX
13 - Investigate	XX	XX	XX	XX	XX	XX
14 - Engage	XX	XX	XX	XX	XX	XX
15 - Disengage	XX	XX	XX	XX	XX	XX

MIL-STD-6016B

APPENDIX A

Table J12.6-2. Word Level Minimum Implementation by Status Information
Discrete Value by Environment/Category (Sheet 7 of 10)

STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 3, SURFACE (MARITIME)	J12.6 WORDS					
	J12.6C5		J12.6C6		J12.6C7	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
0 - No Statement	X#	##	X#	##	XX	XX
1 - Attacking	X#	##	X#	##	XX	XX
2 - Investigating	X#	##	X#	##	XX	XX
3 - Missile in Flight/Weapon Released	X#	##	X#	##	XX	XX
4 - New Sensor Target Report	X#	##	X#	##	XX	XX
5 - Cancel Sensor Target Report	X#	##	X#	##	XX	XX
6 - Track/Target Destroyed	XX	XX	XX	XX	XX	XX
7 - Disengaging	X#	##	X#	##	XX	XX
8 - Target Partially Destroyed	XX	XX	XX	XX	XX	XX
9 - Mark Point/Point of Interest	XX	XX	XX	XX	XX	XX
10 - Lock On/Designated Surface Target	X#	##	X#	##	XX	XX
11 - Battle Damage Assessment Unknown	XX	XX	XX	XX	XX	XX
12 - Recommend Reattack	XX	XX	XX	XX	XX	XX
13 - Investigate	XX	XX	XX	XX	XX	XX
14 - Engage	XX	XX	XX	XX	XX	XX
15 - Disengage	XX	XX	XX	XX	XX	XX

MIL-STD-6016B

APPENDIX A

Table J12.6-2. Word Level Minimum Implementation by Status Information
Discrete Value by Environment/Category (Sheet 8 of 10)

STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 5, LAND (GROUND)	J12.6 WORDS					
	J12.6I		J12.6E0		J12.6C1	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
0 - No Statement	TR	TR	T61R61	T61R61	TR	TR
1 - Attacking	XR	TR	XR	TR	X#	##
2 - Investigating	XR	TR	XR	TR	X#	##
3 - Missile in Flight/Weapon Released	XR	TR	XR	TR	X#	##
4 - New Sensor Target Report	XR	TR	XR	TR	X#	##
5 - Cancel Sensor Target Report	XR	TR	X#	##	XX	XX
6 - Track/Target Destroyed	XR	TR	XR	TR	XX	XX
7 - Disengaging	XR	TR	XR	TR	XX	XX
8 - Target Partially Destroyed	XR	TR	XR	TR	XX	XX
9 - Mark Point/Point of Interest	XR	TR	XR	TR	XX	XX
10 - Lock On/Designated Ground Target	XR	TR	XR	TR	X#	##
11 - Battle Damage Assessment Unknown	XR	TR	XR	TR	XX	XX
12 - Recommend Reattack	XR	TR	XR	TR	XX	XX
13 - Investigate	XX	XX	XX	XX	XX	XX
14 - Engage	XX	XX	XX	XX	XX	XX
15 - Disengage	XX	XX	XX	XX	XX	XX

MIL-STD-6016B

APPENDIX A

Table J12.6-2. Word Level Minimum Implementation by Status Information
Discrete Value by Environment/Category (Sheet 9 of 10)

STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 5, LAND (GROUND)	J12.6 WORDS					
	J12.6C2		J12.6C3		J12.6C4	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
0 - No Statement	X#	##	X#	##	X#	##
1 - Attacking	X#	##	X#	##	X#	##
2 - Investigating	X#	##	X#	##	X#	##
3 - Missile in Flight/Weapon Released	X#	##	X#	##	X#	##
4 - New Sensor Target Report	X#	##	X#	##	X#	##
5 - Cancel Sensor Target Report	X#	##	X#	##	X#	##
6 - Track/Target Destroyed	XX	XX	XX	XX	XX	XX
7 - Disengaging	X#	##	X#	##	X#	##
8 - Target Partially Destroyed	XX	XX	XX	XX	XX	XX
9 - Mark Point/Point of Interest	XX	XX	XX	XX	XX	XX
10 - Lock On/Designated Ground Target	X#	##	X#	##	X#	##
11 - Battle Damage Assessment Unknown	XX	XX	XX	XX	XX	XX
12 - Recommend Reattack	XX	XX	XX	XX	XX	XX
13 - Investigate	XX	XX	XX	XX	XX	XX
14 - Engage	XX	XX	XX	XX	XX	XX
15 - Disengage	XX	XX	XX	XX	XX	XX

MIL-STD-6016B

APPENDIX A

Table J12.6-2. Word Level Minimum Implementation by Status Information
Discrete Value by Environment/Category (Sheet 10 of 10)

STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 5, LAND (GROUND)	J12.6 WORDS					
	J12.6C5		J12.6C6		J12.6C7	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
0 - No Statement	X#	##	X#	##	XX	XX
1 - Attacking	X#	##	X#	##	XX	XX
2 - Investigating	X#	##	X#	##	XX	XX
3 - Missile in Flight/Weapon Released	X#	##	X#	##	XX	XX
4 - New Sensor Target Report	X#	##	X#	##	XX	XX
5 - Cancel Sensor Target Report	X#	##	X#	##	XX	XX
6 - Track/Target Destroyed	XX	XX	XX	XX	XX	XX
7 - Disengaging	X#	##	X#	##	XX	XX
8 - Target Partially Destroyed	XX	XX	XX	XX	XX	XX
9 - Mark Point/Point of Interest	XX	XX	XX	XX	XX	XX
10 - Lock On/Designated Ground Target	X#	##	X#	##	XX	XX
11 - Battle Damage Assessment Unknown	XX	XX	XX	XX	XX	XX
12 - Recommend Reattack	XX	XX	XX	XX	XX	XX
13 - Investigate	XX	XX	XX	XX	XX	XX
14 - Engage	XX	XX	XX	XX	XX	XX
15 - Disengage	XX	XX	XX	XX	XX	XX

MIL-STD-6016B

APPENDIX A

Table J12.6-3. Data Element Level Minimum Implementation by Status Information Discrete Value (Sheet 1 of 40)

J12.6I DATA ELEMENT	STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 0, NO STATEMENT/UNKNOWN			
	0		1-15	
	C ² JU	NC ² JU	C ² JU	NC ² JU
Status Information Discrete	TR	TR	XX	XX
Target Position Quality	NN	NN	XX	XX
Environment/Category	TR	TR	XX	XX
Origin of Index Number	N22N	N22N	XX	XX
Index Number	NN	NN	XX	XX
Latitude, 0.0103 Minute	TR	TR	XX	XX
Longitude, 0.0103 Minute	TR	TR	XX	XX
J12.6E0 DATA ELEMENT				
Track Number, Objective	XX	XX	XX	XX
Correlation Indicator, TN/IN	XX	XX	XX	XX
Course	XX	XX	XX	XX
Speed	XX	XX	XX	XX
Altitude, 100 Ft	XX	XX	XX	XX
Identity	XX	XX	XX	XX
Identity Amplifying Descriptor	XX	XX	XX	XX
Exercise Indicator	XX	XX	XX	XX
Space Specific Type	XX	XX	XX	XX
Air Specific Type	XX	XX	XX	XX
Surface (Maritime) Specific Type	XX	XX	XX	XX
Subsurface (Maritime) Specific Type	XX	XX	XX	XX
Land (Ground) Specific Type	XX	XX	XX	XX
Special Interest Indicator	XX	XX	XX	XX

MIL-STD-6016B

APPENDIX A

Table J12.6-3. Data Element Level Minimum Implementation by Status Information Discrete Value (Sheet 2 of 40)

J12.6C1 DATA ELEMENT	STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 0, NO STATEMENT/UNKNOWN			
	0		1-15	
	C ² JU	NC ² JU	C ² JU	NC ² JU
Track Number, Addressee	TR	TR	XX	XX
Pointer	TR	TR	XX	XX
Weapon System	NN	NN	XX	XX
Weapon Engagement Status	N22N	N22N	XX	XX
Track Number, Reference	NN	NN	XX	XX
Mode III IFF Interrogation	NN	NN	XX	XX
Mode IV Indicator	NN	NN	XX	XX
Strength	NN	NN	XX	XX
J12.6C2 DATA ELEMENT				
End of Target Reporting Cycle	XX	XX	XX	XX
Time Indicator	XX	XX	XX	XX
Minute	XX	XX	XX	XX
Second	XX	XX	XX	XX
Hundredths	XX	XX	XX	XX
Emitter PRF	XX	XX	XX	XX
Emitter Status	XX	XX	XX	XX
Jammer Type	XX	XX	XX	XX
Track Number, Index Number Originator	XX	XX	XX	XX
Index Number, Third Party	XX	XX	XX	XX
Sensor Type	XX	XX	XX	XX
Fusion Type	XX	XX	XX	XX

MIL-STD-6016B

APPENDIX A

Table J12.6-3. Data Element Level Minimum Implementation by Status Information Discrete Value (Sheet 3 of 40)

J12.6C3 DATA ELEMENT	STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 0, NO STATEMENT/UNKNOWN			
	0		1-15	
	C ² JU	NC ² JU	C ² JU	NC ² JU
Slant Range Position Uncertainty	XX	XX	XX	XX
Cross Range Position Uncertainty	XX	XX	XX	XX
Vertical Position Uncertainty	XX	XX	XX	XX
Uncertainty Orientation	XX	XX	XX	XX
Uncertainty Tilt	XX	XX	XX	XX
Velocity Down	XX	XX	XX	XX
Velocity North Uncertainty	XX	XX	XX	XX
Velocity East Uncertainty	XX	XX	XX	XX
Velocity Down Uncertainty	XX	XX	XX	XX
J12.6C4 DATA ELEMENT				
Probability of Own Forces	XX	XX	XX	XX
Probability of Enemy Forces	XX	XX	XX	XX
Space Ambiguous Type 1	XX	XX	XX	XX
Air Ambiguous Type 1	XX	XX	XX	XX
Surface (Maritime) Ambiguous Type 1	XX	XX	XX	XX
Subsurface (Maritime) Ambiguous Type 1	XX	XX	XX	XX
Land (Ground) Ambiguous Type 1	XX	XX	XX	XX
Space Ambiguous Type 2	XX	XX	XX	XX
Air Ambiguous Type 2	XX	XX	XX	XX
Surface (Maritime) Ambiguous Type 2	XX	XX	XX	XX
Subsurface (Maritime) Ambiguous Type 2	XX	XX	XX	XX
Land (Ground) Ambiguous Type 2	XX	XX	XX	XX
Ambiguous Type 1 Probability	XX	XX	XX	XX
Ambiguous Type 2 Probability	XX	XX	XX	XX

MIL-STD-6016B

APPENDIX A

Table J12.6-3. Data Element Level Minimum Implementation by Status Information Discrete Value (Sheet 4 of 40)

J12.6C5 DATA ELEMENT	STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 0, NO STATEMENT/UNKNOWN			
	0		1-15	
	C ² JU	NC ² JU	C ² JU	NC ² JU
Future Event Descriptor	XX	XX	XX	XX
Time of Event, Minute	XX	XX	XX	XX
Time of Event, Second	XX	XX	XX	XX
Time of Event, Hundredths	XX	XX	XX	XX
Event Duration, Seconds	XX	XX	XX	XX
Event Duration, Hundredths	XX	XX	XX	XX
J12.6C6 DATA ELEMENT				
Sensor Type Indicator	XX	XX	XX	XX
Sensor Status/Command Indicator	XX	XX	XX	XX
Sensor Channel/Code	XX	XX	XX	XX
Sensor Channel Set	XX	XX	XX	XX
Frequency Agility Indicator	XX	XX	XX	XX
PDI Indicator	XX	XX	XX	XX
PDI/Missile Data Link Channel	XX	XX	XX	XX
Air/Ground Weapon Data Link Channel	XX	XX	XX	XX
Weapon ID	XX	XX	XX	XX
Radar PRF	XX	XX	XX	XX
ARM Threat Number	XX	XX	XX	XX
ARM Type	XX	XX	XX	XX
J12.6C7 DATA ELEMENT				
Variance XX	XX	XX	XX	XX
Variance YY	XX	XX	XX	XX
Variance ZZ	XX	XX	XX	XX
Variance XY	XX	XX	XX	XX
Variance XZ	XX	XX	XX	XX
Variance YZ	XX	XX	XX	XX
Dive Angle	XX	XX	XX	XX

Table J12.6-3. Data Element Level Minimum Implementation by Status Information Discrete Value
(Sheet 5 of 40)

J12.6I DATA ELEMENT	STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 2, AIR											
	0		1		2		3		4		5	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
Status Information Discrete	TR	TR	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR
Target Position Quality	##	TR	X#	TR	X#	TR	X#	TR	X#	TR	X#	##
Environment/Category	TR	TR	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR
Origin of Index Number	#R	TR	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR
Index Number	#R	TR	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR
Latitude, 0.0103 Minute	TR	TR	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR
Longitude, 0.0103 Minute	TR	TR	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR
J12.6E0 DATA ELEMENT												
Track Number, Objective	TR	TR	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR
Correlation Indicator, TN/IN	N22#	TR	X#	TR	X#	TR	X#	TR	X#	TR	X#	##
Course	TR	TR	XR	TR	XR	TR	XR	TR	XR	TR	X#	TR
Speed	TR	TR	XR	TR	XR	TR	XR	TR	XR	TR	X#	TR
Altitude, 100 Ft	TR	TR	XR	TR	XR	TR	XR	TR	XR	TR	X#	TR
Identity	TR	#22R	XR	#22R	XR	#22R	XR	#22R	XR	#22R	X#	#22R
Identity Amplifying Descriptor	TR	#22R	XR	#22R	XR	#22R	XR	#22R	XR	#22R	X#	#22R
Exercise Indicator	TR	#56R	XR	#56R	XR	#56R	XR	#56R	XR	#56R	X#56	#56R
Space Specific Type	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Air Specific Type	TR	#R	XR	##	XR	##	XR	##	XR	##	X#	##
Surface (Maritime) Specific Type	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Subsurface (Maritime) Specific Type	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Land (Ground) Specific Type	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Special Interest Indicator	TR	##	XR	##	XR	##	XR	##	XR	##	X#	##

Table J12.6-3. Data Element Level Minimum Implementation by Status Information Discrete Value
(Sheet 6 of 40)

J12.6I DATA ELEMENT	STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 2, AIR											
	6		7		8		9		10		11	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
Status Information Discrete	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR
Target Position Quality	X#	TR	X#	TR	X#	TR	X#	TR	X#	TR	X#	TR
Environment/Category	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR
Origin of Index Number	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR
Index Number	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR
Latitude, 0.0103 Minute	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR
Longitude, 0.0103 Minute	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR
J12.6E0 DATA ELEMENT												
Track Number, Objective	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR
Correlation Indicator, TN/IN	X#	TR	X#	TR	XR	TR	X#	TR	X#	TR	X#	TR
Course	XR	TR	XR	TR	XR	##	XR	TR	XR	TR	XR	TR
Speed	XR	TR	XR	TR	XR	##	XR	TR	XR	TR	XR	TR
Altitude, 100 Ft	XR	TR	XR	TR	X#	##	XR	TR	XR	TR	XR	TR
Identity	XR	#22R	XR	#22R	XR	#22R	XR	#22R	XR	#22R	XR	#22R
Identity Amplifying Descriptor	XR	#22R	XR	#22R	XR	#22R	XR	#22R	XR	#22R	XR	#22R
Exercise Indicator	XR	#56R	XR	#56R	XR	#56R	XR	#56R	XR	#56R	XR	#56R
Space Specific Type	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Air Specific Type	XR	##	XR	##	X#	##	XR	##	XR	##	XR	##
Surface (Maritime) Specific Type	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Subsurface (Maritime) Specific Type	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Land (Ground) Specific Type	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Special Interest Indicator	XR	##	XR	##	XR	##	XR	##	XR	##	XR	##

A-264

APPENDIX A

MIL-STD-6016B

Table J12.6-3. Data Element Level Minimum Implementation by Status Information Discrete Value
(Sheet 7 of 40)

J12.6I DATA ELEMENT	STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 2, AIR							
	12		13		14		15	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
Status Information Discrete	XR	TR	X#	TR	X#	TR	X#	TR
Target Position Quality	X#	TR	X#	TR	X#	TR	X#	TR
Environment/Category	XR	TR	X#	TR	X#	TR	X#	TR
Origin of Index Number	XR	TR	X#	TR	X#	TR	X#	TR
Index Number	XR	TR	X#	TR	X#	TR	X#	TR
Latitude, 0.0103 Minute	XR	TR	X#	TR	X#	TR	X#	TR
Longitude, 0.0103 Minute	XR	TR	X#	TR	X#	TR	X#	TR
J12.6E0 DATA ELEMENT								
Track Number, Objective	XR	TR	X#	TR	X#	TR	X#	TR
Correlation Indicator, TN/IN	X#	TR	X#	TR	X#	TR	X#	TR
Course	XR	TR	X#	TR	X#	TR	X#	TR
Speed	XR	TR	X#	TR	X#	TR	X#	TR
Altitude, 100 Ft	XR	TR	X#	TR	X#	TR	X#	TR
Identity	XR	#22R	X#	#22R	X#	#22R	X#	#22R
Identity Amplifying Descriptor	XR	#22R	X#	#22R	X#	#22R	X#	#22R
Exercise Indicator	XR	#56R	X#56	#56R	X#56	#56R	X#56	#56R
Space Specific Type	XX	XX	XX	XX	XX	XX	XX	XX
Air Specific Type	XR	##	X#	##	X#	##	X#	##
Surface (Maritime) Specific Type	XX	XX	XX	XX	XX	XX	XX	XX
Subsurface (Maritime) Specific Type	XX	XX	XX	XX	XX	XX	XX	XX
Land (Ground) Specific Type	XX	XX	XX	XX	XX	XX	XX	XX
Special Interest Indicator	XR	##	X#	##	X#	##	X#	##

Table J12.6-3. Data Element Level Minimum Implementation by Status Information Discrete Value
(Sheet 8 of 40)

J12.6C1 DATA ELEMENT	STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 2, AIR											
	0		1		2		3		4		5	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
Track Number, Addressee	TR	TR	X#	TR	X#	TR	X#	TR	X#	X#	X#	X#
Pointer	TR	##	X#	X#	X#	X#	X#	X#	X#	X#	X#	X#
Weapon System	#N	N#	X#	N#	X#	N#	X#	N#	X#	X#	X#	X#
Weapon Engagement Status	#22N	N22#	X#	N22#	X#	N22#	X#	N22#	X#	X#	X#	X#
Track Number, Reference	##	N#	X#	N#	X#	N#	X#	N#	X#	X#	X#	X#
Mode III IFF Interrogation	##	##	X#	##	X#	##	X#	##	X#	X#	X#	X#
Mode IV Indicator	##	##	X#	##	X#	##	X#	##	X#	X#	X#	X#
Strength	##	##	X#	##	X#	##	X#	##	X#	##	X#	X#
J12.6C2 DATA ELEMENT												
End of Target Reporting Cycle	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Time Indicator	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Minute	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Second	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Hundredths	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Emitter PRF	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Emitter Status	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Jammer Type	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Track Number, Index Originator	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Index Number, Third Party	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Sensor Type	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Fusion Type	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR

Table J12.6-3. Data Element Level Minimum Implementation by Status Information Discrete Value
(Sheet 9 of 40)

J12.6C1 DATA ELEMENT	STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 2, AIR											
	6		7		8		9		10		11	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
Track Number, Addressee	X#	X#	X#	X#	XX	XX	X#	TR	X#	TR	XX	XX
Pointer	X#	X#	X#	X#	XX	XX	X#	##	X#	##	XX	XX
Weapon System	X#	X#	X#	X#	XX	XX	X#	N#	X#	N#	XX	XX
Weapon Engagement Status	X#	X#	X#	X#	XX	XX	X#	N22#	X#	N22#	XX	XX
Track Number, Reference	X#	X#	X#	X#	XX	XX	X#	N#	X#	N#	XX	XX
Mode III IFF Interrogation	X#	X#	X#	X#	XX	XX	X#	##	X#	##	XX	XX
Mode IV Indicator	X#	X#	X#	X#	XX	XX	X#	##	X#	##	XX	XX
Strength	X#	X#	X#	X#	XX	XX	X#	##	X#	##	XX	XX
J12.6C2 DATA ELEMENT												
End of Target Reporting Cycle	X#	##	X#	##	XX	XX	X#	##	X#	##	XX	XX
Time Indicator	X#	##	X#	##	XX	XX	X#	##	X#	##	XX	XX
Minute	X#	##	X#	##	XX	XX	X#	##	X#	##	XX	XX
Second	X#	##	X#	##	XX	XX	X#	##	X#	##	XX	XX
Hundredths	X#	##	X#	##	XX	XX	X#	##	X#	##	XX	XX
Emitter PRF	X#	##	X#	##	XX	XX	X#	##	X#	##	XX	XX
Emitter Status	X#	##	X#	##	XX	XX	X#	##	X#	##	XX	XX
Jammer Type	X#	##	X#	##	XX	XX	X#	##	X#	##	XX	XX
Track Number, Index Originator	X#	##	X#	##	XX	XX	X#	##	X#	##	XX	XX
Index Number, Third Party	X#	##	X#	##	XX	XX	X#	##	X#	##	XX	XX
Sensor Type	X#	##	X#	##	XX	XX	X#	##	X#	##	XX	XX
Fusion Type	XR	TR	XR	TR	XX	XX	XR	TR	XR	TR	XX	XX

Table J12.6-3. Data Element Level Minimum Implementation by Status Information Discrete Value
(Sheet 10 of 40)

J12.6C1 DATA ELEMENT	STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 2, AIR							
	12		13		14		15	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
Track Number, Addressee	X#	TR	X#	TR	X#	TR	X#	TR
Pointer	X#	X#	X#	X#	X#	X#	X#	X#
Weapon System	X#	N#	X#	##	X#	##	X#	##
Weapon Engagement Status	X#	N22#	X#	#22#	X#	#22#	X#	#22#
Track Number, Reference	X#	N#	X#	##	X#	##	X#	##
Mode III IFF Interrogation	X#	##	X#	##	X#	##	X#	##
Mode IV Indicator	X#	##	X#	##	X#	##	X#	##
Strength	X#	##	X#	##	X#	##	X#	##
J12.6C2 DATA ELEMENT								
End of Target Reporting Cycle	X#	##	X#	##	X#	##	X#	##
Time Indicator	X#	##	X#	##	X#	##	X#	##
Minute	X#	##	X#	##	X#	##	X#	##
Second	X#	##	X#	##	X#	##	X#	##
Hundredths	X#	##	X#	##	X#	##	X#	##
Emitter PRF	X#	##	X#	##	X#	##	X#	##
Emitter Status	X#	##	X#	##	X#	##	X#	##
Jammer Type	X#	##	X#	##	X#	##	X#	##
Track Number, Index Originator	X#	##	X#	##	X#	##	X#	##
Index Number, Third Party	X#	##	X#	##	X#	##	X#	##
Sensor Type	X#	##	X#	##	X#	##	X#	##
Fusion Type	XR	TR	X#	TR	X#	TR	X#	TR

Table J12.6-3. Data Element Level Minimum Implementation by Status Information Discrete Value
(Sheet 11 of 40)

J12.6C3 DATA ELEMENT	STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 2, AIR											
	0		1		2		3		4		5	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
Slant Range Position	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Uncertainty												
Cross Range Position	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Uncertainty												
Vertical Position Uncertainty	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Uncertainty Orientation	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Uncertainty Tilt	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Velocity Down	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Velocity North Uncertainty	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Velocity East Uncertainty	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Velocity Down Uncertainty	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
J12.6C4 DATA ELEMENT												
Probability of Own Forces	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Probability of Enemy Forces	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Space Ambiguous Type 1	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Air Ambiguous Type 1	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Surface (Maritime) Ambiguous Type 1	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Subsurface (Maritime) Ambiguous Type 1	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Land (Ground) Ambiguous Type 1	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Space Ambiguous Type 2	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Air Ambiguous Type 2	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Surface (Maritime) Ambiguous Type 2	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Subsurface (Maritime) Ambiguous Type 2	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Land (Ground) Ambiguous Type 2	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Ambiguous Type 1 Probability	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Ambiguous Type 2 Probability	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##

Table J12.6-3. Data Element Level Minimum Implementation by Status Information Discrete Value
(Sheet 12 of 40)

J12.6C3 DATA ELEMENT	STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 2, AIR											
	6		7		8		9		10		11	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
Slant Range Position Uncertainty	X#	##	X#	##	XX	XX	X#	##	X#	##	XX	XX
Cross Range Position Uncertainty	X#	##	X#	##	XX	XX	X#	##	X#	##	XX	XX
Vertical Position Uncertainty	X#	##	X#	##	XX	XX	X#	##	X#	##	XX	XX
Uncertainty Orientation	X#	##	X#	##	XX	XX	X#	##	X#	##	XX	XX
Uncertainty Tilt	X#	##	X#	##	XX	XX	X#	##	X#	##	XX	XX
Velocity Down	X#	##	X#	##	XX	XX	X#	##	X#	##	XX	XX
Velocity North Uncertainty	X#	##	X#	##	XX	XX	X#	##	X#	##	XX	XX
Velocity East Uncertainty	X#	##	X#	##	XX	XX	X#	##	X#	##	XX	XX
Velocity Down Uncertainty	X#	##	X#	##	XX	XX	X#	##	X#	##	XX	XX
J12.6C4 DATA ELEMENT												
Probability of Own Forces	X#	##	X#	##	XX	XX	X#	##	X#	##	XX	XX
Probability of Enemy Forces	X#	##	X#	##	XX	XX	X#	##	X#	##	XX	XX
Space Ambiguous Type 1	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Air Ambiguous Type 1	X#	##	X#	##	XX	XX	X#	##	X#	##	XX	XX
Surface (Maritime) Ambiguous Type 1	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Subsurface (Maritime) Ambiguous Type 1	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Land (Ground) Ambiguous Type 1	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Space Ambiguous Type 2	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Air Ambiguous Type 2	X#	##	X#	##	XX	XX	X#	##	X#	##	XX	XX
Surface (Maritime) Ambiguous Type 2	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Subsurface (Maritime) Ambiguous Type 2	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Land (Ground) Ambiguous Type 2	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Ambiguous Type 1 Probability	X#	##	X#	##	XX	XX	X#	##	X#	##	XX	XX
Ambiguous Type 2 Probability	X#	##	X#	##	XX	XX	X#	##	X#	##	XX	XX

A-270

APPENDIX A

MIL-STD-6016B

Table J12.6-3. Data Element Level Minimum Implementation by Status Information Discrete Value
(Sheet 13 of 40)

J12.6C3 DATA ELEMENT	STATUS INFORMATION DISCRETE FOR ENVIRONMENT/CATEGORY = 2, AIR							
	12		13		14		15	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
Slant Range Position Uncertainty	X#	##	X#	##	X#	##	X#	##
Cross Range Position Uncertainty	X#	##	X#	##	X#	##	X#	##
Vertical Position Uncertainty	X#	##	X#	##	X#	##	X#	##
Uncertainty Orientation	X#	##	X#	##	X#	##	X#	##
Uncertainty Tilt	X#	##	X#	##	X#	##	X#	##
Velocity Down	X#	##	X#	##	X#	##	X#	##
Velocity North Uncertainty	X#	##	X#	##	X#	##	X#	##
Velocity East Uncertainty	X#	##	X#	##	X#	##	X#	##
Velocity Down Uncertainty	X#	##	X#	##	X#	##	X#	##
J12.6C4 DATA ELEMENT								
Probability of Own Forces	X#	##	X#	##	X#	##	X#	##
Probability of Enemy Forces	X#	##	X#	##	X#	##	X#	##
Space Ambiguous Type 1	XX	XX	XX	XX	XX	XX	XX	XX
Air Ambiguous Type 1	X#	##	X#	##	X#	##	X#	##
Surface (Maritime) Ambiguous Type 1	XX	XX	XX	XX	XX	XX	XX	XX
Subsurface (Maritime) Ambiguous Type 1	XX	XX	XX	XX	XX	XX	XX	XX
Land (Ground) Ambiguous Type 1	XX	XX	XX	XX	XX	XX	XX	XX
Space Ambiguous Type 2	XX	XX	XX	XX	XX	XX	XX	XX
Air Ambiguous Type 2	X#	##	X#	##	X#	##	X#	##
Surface (Maritime) Ambiguous Type 2	XX	XX	XX	XX	XX	XX	XX	XX
Subsurface (Maritime) Ambiguous Type 2	XX	XX	XX	XX	XX	XX	XX	XX
Land (Ground) Ambiguous Type 2	XX	XX	XX	XX	XX	XX	XX	XX
Ambiguous Type 1 Probability	X#	##	X#	##	X#	##	X#	##
Ambiguous Type 2 Probability	X#	##	X#	##	X#	##	X#	##

Table J12.6-3. Data Element Level Minimum Implementation by Status Information Discrete Value
(Sheet 14 of 40)

J12.6C5 DATA ELEMENT	STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 2, AIR											
	0		1		2		3		4		5	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
Future Event Descriptor	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Time of Event, Minute	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Time of Event, Second	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Time of Event, Hundredths	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Event Duration, Seconds	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Event Duration, Hundredths	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
J12.6C6 DATA ELEMENT												
Sensor Type Indicator	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Sensor Status/Command Indicator	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Sensor Channel/Code	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Sensor Channel Set	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Frequency Agility Indicator	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
PDI Indicator	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
PDI/Missile Data Link Channel	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Air-Ground Weapon Data Link Channel	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Weapon ID	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Radar PRF	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
ARM Threat Number	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
ARM Type	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
J12.6C7 DATA ELEMENT												
Variance XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Variance YY	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Variance ZZ	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Variance XY	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Variance XZ	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Variance YZ	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Dive Angle	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX

A-272

APPENDIX A

MIL-STD-6016B

Table J12.6-3. Data Element Level Minimum Implementation by Status Information Discrete Value
(Sheet 15 of 40)

J12.6C5 DATA ELEMENT	STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 2, AIR											
	6		7		8		9		10		11	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
Future Event Descriptor	X#	##	X#	##	XX	XX	X#	##	X#	##	XX	XX
Time of Event, Minute	X#	##	X#	##	XX	XX	X#	##	X#	##	XX	XX
Time of Event, Second	X#	##	X#	##	XX	XX	X#	##	X#	##	XX	XX
Time of Event, Hundredths	X#	##	X#	##	XX	XX	X#	##	X#	##	XX	XX
Event Duration, Seconds	X#	##	X#	##	XX	XX	X#	##	X#	##	XX	XX
Event Duration, Hundredths	X#	##	X#	##	XX	XX	X#	##	X#	##	XX	XX
J12.6C6 DATA ELEMENT												
Sensor Type Indicator	X#	##	X#	##	XX	XX	X#	##	X#	##	XX	XX
Sensor Status/Command Indicator	X#	##	X#	##	XX	XX	X#	##	X#	##	XX	XX
Sensor Channel/Code	X#	##	X#	##	XX	XX	X#	##	X#	##	XX	XX
Sensor Channel Set	X#	##	X#	##	XX	XX	X#	##	X#	##	XX	XX
Frequency Agility Indicator	X#	##	X#	##	XX	XX	X#	##	X#	##	XX	XX
PDI Indicator	X#	##	X#	##	XX	XX	X#	##	X#	##	XX	XX
PDI/Missile Data Link Channel	X#	##	X#	##	XX	XX	X#	##	X#	##	XX	XX
Air-Ground Weapon Data Link Channel	X#	##	X#	##	XX	XX	X#	##	X#	##	XX	XX
Weapon ID	X#	##	X#	##	XX	XX	X#	##	X#	##	XX	XX
Radar PRF	X#	##	X#	##	XX	XX	X#	##	X#	##	XX	XX
ARM Threat Number	X#	##	X#	##	XX	XX	X#	##	X#	##	XX	XX
ARM Type	X#	##	X#	##	XX	XX	X#	##	X#	##	XX	XX
J12.6C7 DATA ELEMENT												
Variance XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Variance YY	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Variance ZZ	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Variance XY	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Variance XZ	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Variance YZ	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Dive Angle	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX

Table J12.6-3. Data Element Level Minimum Implementation by Status Information Discrete Value
(Sheet 16 of 40)

J12.6C5 DATA ELEMENT	STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 2, AIR							
	12		13		14		15	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
Future Event Descriptor	X#	##	X#	##	X#	##	X#	##
Time of Event, Minute	X#	##	X#	##	X#	##	X#	##
Time of Event, Second	X#	##	X#	##	X#	##	X#	##
Time of Event, Hundredths	X#	##	X#	##	X#	##	X#	##
Event Duration, Seconds	X#	##	X#	##	X#	##	X#	##
Event Duration, Hundredths	X#	##	X#	##	X#	##	X#	##
J12.6C6 DATA ELEMENT								
Sensor Type Indicator	X#	##	X#	##	X#	##	X#	##
Sensor Status/Command Indicator	X#	##	X#	##	X#	##	X#	##
Sensor Channel/Code	X#	##	X#	##	X#	##	X#	##
Sensor Channel Set	X#	##	X#	##	X#	##	X#	##
Frequency Agility Indicator	X#	##	X#	##	X#	##	X#	##
PDI Indicator	X#	##	X#	##	X#	##	X#	##
PDI/Missile Data Link Channel	X#	##	X#	##	X#	##	X#	##
Air-Ground Weapon Data Link Channel	X#	##	X#	##	X#	##	X#	##
Weapon ID	X#	##	X#	##	X#	##	X#	##
Radar PRF	X#	##	X#	##	X#	##	X#	##
ARM Threat Number	X#	##	X#	##	X#	##	X#	##
ARM Type	X#	##	X#	##	X#	##	X#	##
J12.6C7 DATA ELEMENT								
Variance XX	XX	XX	XX	XX	XX	XX	XX	XX
Variance YY	XX	XX	XX	XX	XX	XX	XX	XX
Variance ZZ	XX	XX	XX	XX	XX	XX	XX	XX
Variance XY	XX	XX	XX	XX	XX	XX	XX	XX
Variance XZ	XX	XX	XX	XX	XX	XX	XX	XX
Variance YZ	XX	XX	XX	XX	XX	XX	XX	XX
Dive Angle	XX	XX	XX	XX	XX	XX	XX	XX

Table J12.6-3. Data Element Level Minimum Implementation by Status Information Discrete Value
(Sheet 17 of 40)

J12.6I DATA ELEMENT	STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 3, SURFACE (MARITIME)											
	0		1		2		3		4		5	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
Status Information Discrete	TR	TR	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR
Target Position Quality	##	TR	X#	TR	X#	TR	X#	TR	X#	TR	X#	##
Environment/Category	TR	TR	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR
Origin of Index Number	#R	TR	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR
Index Number	#R	TR	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR
Latitude, 0.0103 Minute	TR	TR	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR
Longitude, 0.0103 Minute	TR	TR	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR
J12.6E0 DATA ELEMENT												
Track Number, Objective	TR	TR	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR
Correlation Indicator, TN/IN	N22#	TR	X#	TR	X#	TR	X#	TR	X#	TR	X#	##
Course	TR	TR	XR	TR	XR	TR	XR	TR	XR	TR	X#	TR
Speed	TR	TR	XR	TR	XR	TR	XR	TR	XR	TR	X#	TR
Altitude, 100 Ft	TR	TR	XR	TR	XR	TR	XR	TR	XR	TR	X#	TR
Identity	TR	#22R	XR	#22R	XR	#22R	XR	#22R	XR	#22R	X#	#22R
Identity Amplifying Descriptor	TR	#22R	XR	#22R	XR	#22R	XR	#22R	XR	#22R	X#	#22R
Exercise Indicator	TR	#56R	XR	#56R	XR	#56R	XR	#56R	XR	#56R	X#56	#56R
Space Specific Type	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Air Specific Type	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Surface (Maritime) Specific Type	##	##	X#	##	X#	##	X#	##	X#	##	X#	##
Subsurface (Maritime) Specific Type	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Land (Ground) Specific Type	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Special Interest Indicator	TR	##	XR	##	XR	##	XR	##	XR	##	X#	##

A-275

APPENDIX A

MIL-STD-6016B

Table J12.6-3. Data Element Level Minimum Implementation by Status Information Discrete Value
(Sheet 18 of 40)

J12.6I DATA ELEMENT	STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 3, SURFACE (MARITIME)											
	6		7		8		9		10		11	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
Status Information Discrete	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR
Target Position Quality	X#	TR	X#	TR	X#	TR	X#	TR	X#	TR	XR	TR
Environment/Category	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR
Origin of Index Number	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR
Index Number	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR
Latitude, 0.0103 Minute	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR
Longitude, 0.0103 Minute	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR
J12.6E0 DATA ELEMENT												
Track Number, Objective	XR	TR	XR	TR	XR	TR	XN	NN	XR	TR	XR	TR
Correlation Indicator, TN/IN	X#	TR	X#	TR	XR	TR	XN	NN	X#	TR	XR	TR
Course	XR	##	XR	TR	XR	##	XN	NN	XR	TR	XR	##
Speed	XR	##	XR	TR	XR	##	XN	NN	XR	TR	XR	##
Altitude, 100 Ft	XR	##	XR	TR	X#	##	XR	TR	XR	TR	X#	##
Identity	XR	#22#22	XR	#22R	XR	#22#22	XN	N22N22	XR	#22R	XR	#22#22
Identity Amplifying Descriptor	XR	#22#22	XR	#22R	XR	#22#22	XN	N22N22	XR	#22R	XR	#22#22
Exercise Indicator	XR	#56#56	XR	#56R	XR	#56#56	XN56	N56N56	XR	#56R	XR	#56#56
Space Specific Type	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Air Specific Type	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Surface (Maritime) Specific Type	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Subsurface (Maritime) Specific Type	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Land (Ground) Specific Type	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Special Interest Indicator	XR	##	XR	##	XR	##	XR	##	X#	##	X#	##

A-276

APPENDIX A

MIL-STD-6016B

Table J12.6-3. Data Element Level Minimum Implementation by Status Information Discrete Value
(Sheet 19 of 40)

J12.6I DATA ELEMENT	STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 3, SURFACE (MARITIME)							
	12		13		14		15	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
Status Information Discrete	XR	TR	XX	XX	XX	XX	XX	XX
Target Position Quality	XR	TR	XX	XX	XX	XX	XX	XX
Environment/Category	XR	TR	XX	XX	XX	XX	XX	XX
Origin of Index Number	XR	TR	XX	XX	XX	XX	XX	XX
Index Number	XR	TR	XX	XX	XX	XX	XX	XX
Latitude, 0.0103 Minute	XR	TR	XX	XX	XX	XX	XX	XX
Longitude, 0.0103 Minute	XR	TR	XX	XX	XX	XX	XX	XX
J12.6E0 DATA ELEMENT								
Track Number, Objective	XR	TR	XX	XX	XX	XX	XX	XX
Correlation Indicator, TN/IN	X#	TR	XX	XX	XX	XX	XX	XX
Course	XR	##	XX	XX	XX	XX	XX	XX
Speed	XR	##	XX	XX	XX	XX	XX	XX
Altitude, 100 Ft	XR	##	XX	XX	XX	XX	XX	XX
Identity	XR	#22#22	XX	XX	XX	XX	XX	XX
Identity Amplifying Descriptor	XR	#22#22	XX	XX	XX	XX	XX	XX
Exercise Indicator	XR	#56#56	XX	XX	XX	XX	XX	XX
Space Specific Type	XX	XX	XX	XX	XX	XX	XX	XX
Air Specific Type	XX	XX	XX	XX	XX	XX	XX	XX
Surface (Maritime) Specific Type	X#	##	XX	XX	XX	XX	XX	XX
Subsurface (Maritime) Specific Type	XX	XX	XX	XX	XX	XX	XX	XX
Land (Ground) Specific Type	XX	XX	XX	XX	XX	XX	XX	XX
Special Interest Indicator	X#	##	XX	XX	XX	XX	XX	XX

Table J12.6-3. Data Element Level Minimum Implementation by Status Information Discrete Value
(Sheet 20 of 40)

J12.6C1 DATA ELEMENT	STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 3, SURFACE (MARITIME)											
	0		1		2		3		4		5	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
Track Number, Addressee	TR	TR	X#	TR	X#	TR	X#	TR	XX	XX	XX	XX
Pointer	TR	##	X#	X#	X#	X#	X#	X#	XX	XX	XX	XX
Weapon System	#N	N#	X#	N#	X#	N#	X#	N#	XX	XX	XX	XX
Weapon Engagement Status	#22N	N22#	X#	N22#	X#	N22#	X#	N22#	XX	XX	XX	XX
Track Number, Reference	##	N#	X#	N#	X#	N#	X#	N#	XX	XX	XX	XX
Mode III IFF Interrogation	##	##	X#	##	X#	##	X#	##	XX	XX	XX	XX
Mode IV Indicator	##	##	X#	##	X#	##	X#	##	XX	XX	XX	XX
Strength	##	##	X#	##	X#	##	X#	##	XX	XX	XX	XX
J12.6C2 DATA ELEMENT												
End of Target Reporting Cycle	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Time Indicator	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Minute	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Second	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Hundredths	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Emitter PRF	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Emitter Status	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Jammer Type	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Track Number, Index Originator	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Index Number, Third Party	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Sensor Type	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Fusion Type	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR

Table J12.6-3. Data Element Level Minimum Implementation by Status Information Discrete Value
(Sheet 21 of 40)

J12.6C1 DATA ELEMENT	STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 3, SURFACE (MARITIME)											
	6		7		8		9		10		11	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
Track Number, Addressee	XX	XX	XX	XX	XX	XX	XX	XX	X#	TR	XX	XX
Pointer	XX	XX	XX	XX	XX	XX	XX	XX	X#	X#	XX	XX
Weapon System	XX	XX	XX	XX	XX	XX	XX	XX	X#	N#	XX	XX
Weapon Engagement Status	XX	XX	XX	XX	XX	XX	XX	XX	X#	N22#	XX	XX
Track Number, Reference	XX	XX	XX	XX	XX	XX	XX	XX	X#	N#	XX	XX
Mode III IFF Interrogation	XX	XX	XX	XX	XX	XX	XX	XX	X#	##	XX	XX
Mode IV Indicator	XX	XX	XX	XX	XX	XX	XX	XX	X#	##	XX	XX
Strength	XX	XX	XX	XX	XX	XX	XX	XX	X#	##	XX	XX
J12.6C2 DATA ELEMENT												
End of Target Reporting Cycle	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Time Indicator	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Minute	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Second	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Hundredths	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Emitter PRF	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Emitter Status	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Jammer Type	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Track Number, Index Originator	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Index Number, Third Party	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Sensor Type	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Fusion Type	XX	XX	XR	TR	XX	XX	XX	XX	XR	TR	XX	XX

Table J12.6-3. Data Element Level Minimum Implementation by Status Information Discrete Value
(Sheet 22 of 40)

J12.6C1 DATA ELEMENT	STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 3, SURFACE (MARITIME)							
	12		13		14		15	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
Track Number, Addressee	XX	XX	XX	XX	XX	XX	XX	XX
Pointer	XX	XX	XX	XX	XX	XX	XX	XX
Weapon System	XX	XX	XX	XX	XX	XX	XX	XX
Weapon Engagement Status	XX	XX	XX	XX	XX	XX	XX	XX
Track Number, Reference	XX	XX	XX	XX	XX	XX	XX	XX
Mode III IFF Interrogation	XX	XX	XX	XX	XX	XX	XX	XX
Mode IV Indicator	XX	XX	XX	XX	XX	XX	XX	XX
Strength	XX	XX	XX	XX	XX	XX	XX	XX
J12.6C2 DATA ELEMENT								
End of Target Reporting Cycle	XX	XX	XX	XX	XX	XX	XX	XX
Time Indicator	XX	XX	XX	XX	XX	XX	XX	XX
Minute	XX	XX	XX	XX	XX	XX	XX	XX
Second	XX	XX	XX	XX	XX	XX	XX	XX
Hundredths	XX	XX	XX	XX	XX	XX	XX	XX
Emitter PRF	XX	XX	XX	XX	XX	XX	XX	XX
Emitter Status	XX	XX	XX	XX	XX	XX	XX	XX
Jammer Type	XX	XX	XX	XX	XX	XX	XX	XX
Track Number, Index Originator	XX	XX	XX	XX	XX	XX	XX	XX
Index Number, Third Party	XX	XX	XX	XX	XX	XX	XX	XX
Sensor Type	XX	XX	XX	XX	XX	XX	XX	XX
Fusion Type	XX	XX	XX	XX	XX	XX	XX	XX

Table J12.6-3. Data Element Level Minimum Implementation by Status Information Discrete Value
(Sheet 23 of 40)

J12.6C3 DATA ELEMENT	STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 3, SURFACE (MARITIME)											
	0		1		2		3		4		5	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
Slant Range Position Uncertainty	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Cross Range Position Uncertainty	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Vertical Position Uncertainty	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Uncertainty Orientation	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Uncertainty Tilt	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Velocity Down	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Velocity North Uncertainty	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Velocity East Uncertainty	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Velocity Down Uncertainty	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
J12.6C4 DATA ELEMENT												
Probability of Own Forces	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Probability of Enemy Forces	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Space Ambiguous Type 1	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Air Ambiguous Type 1	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Surface (Maritime) Ambiguous Type 1	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Subsurface (Maritime) Ambiguous Type 1	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Land (Ground) Ambiguous Type 1	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Space Ambiguous Type 2	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Air Ambiguous Type 2	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Surface (Maritime) Ambiguous Type 2	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Subsurface (Maritime) Ambiguous Type 2	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Land (Ground) Ambiguous Type 2	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Ambiguous Type 1 Probability	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Ambiguous Type 2 Probability	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##

Table J12.6-3. Data Element Level Minimum Implementation by Status Information Discrete Value
(Sheet 24 of 40)

J12.6C3 DATA ELEMENT	STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 3, SURFACE (MARITIME)											
	6		7		8		9		10		11	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
Slant Range Position Uncertainty	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Cross Range Position Uncertainty	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Vertical Position Uncertainty	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Uncertainty Orientation	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Uncertainty Tilt	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Velocity Down	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Velocity North Uncertainty	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Velocity East Uncertainty	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Velocity Down Uncertainty	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
J12.6C4 DATA ELEMENT												
Probability of Own Forces	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Probability of Enemy Forces	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Space Ambiguous Type 1	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Air Ambiguous Type 1	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Surface (Maritime) Ambiguous Type 1	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Subsurface (Maritime) Ambiguous Type 1	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Land (Ground) Ambiguous Type 1	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Space Ambiguous Type 2	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Air Ambiguous Type 2	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Surface (Maritime) Ambiguous Type 2	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Subsurface (Maritime) Ambiguous Type 2	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Land (Ground) Ambiguous Type 2	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Ambiguous Type 1 Probability	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Ambiguous Type 2 Probability	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX

Table J12.6-3. Data Element Level Minimum Implementation by Status Information Discrete Value
(Sheet 25 of 40)

J12.6C3 DATA ELEMENT	STATUS INFORMATION DISCRETE FOR ENVIRONMENT/CATEGORY = 3, SURFACE (MARITIME)							
	12		13		14		15	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
Slant Range Position Uncertainty	XX	XX	XX	XX	XX	XX	XX	XX
Cross Range Position Uncertainty	XX	XX	XX	XX	XX	XX	XX	XX
Vertical Position Uncertainty	XX	XX	XX	XX	XX	XX	XX	XX
Uncertainty Orientation	XX	XX	XX	XX	XX	XX	XX	XX
Uncertainty Tilt	XX	XX	XX	XX	XX	XX	XX	XX
Velocity Down	XX	XX	XX	XX	XX	XX	XX	XX
Velocity North Uncertainty	XX	XX	XX	XX	XX	XX	XX	XX
Velocity East Uncertainty	XX	XX	XX	XX	XX	XX	XX	XX
Velocity Down Uncertainty	XX	XX	XX	XX	XX	XX	XX	XX
J12.6C4 DATA ELEMENT								
Probability of Own Forces	XX	XX	XX	XX	XX	XX	XX	XX
Probability of Enemy Forces	XX	XX	XX	XX	XX	XX	XX	XX
Space Ambiguous Type 1	XX	XX	XX	XX	XX	XX	XX	XX
Air Ambiguous Type 1	XX	XX	XX	XX	XX	XX	XX	XX
Surface (Maritime) Ambiguous Type 1	XX	XX	XX	XX	XX	XX	XX	XX
Subsurface (Maritime) Ambiguous Type 1	XX	XX	XX	XX	XX	XX	XX	XX
Land (Ground) Ambiguous Type 1	XX	XX	XX	XX	XX	XX	XX	XX
Space Ambiguous Type 2	XX	XX	XX	XX	XX	XX	XX	XX
Air Ambiguous Type 2	XX	XX	XX	XX	XX	XX	XX	XX
Surface (Maritime) Ambiguous Type 2	XX	XX	XX	XX	XX	XX	XX	XX
Subsurface (Maritime) Ambiguous Type 2	XX	XX	XX	XX	XX	XX	XX	XX
Land (Ground) Ambiguous Type 2	XX	XX	XX	XX	XX	XX	XX	XX
Ambiguous Type 1 Probability	XX	XX	XX	XX	XX	XX	XX	XX
Ambiguous Type 2 Probability	XX	XX	XX	XX	XX	XX	XX	XX

Table J12.6-3. Data Element Level Minimum Implementation by Status Information Discrete Value
(Sheet 26 of 40)

J12.6C5 DATA ELEMENT	STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 3, SURFACE (MARITIME)											
	0		1		2		3		4		5	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
Future Event Descriptor	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Time of Event, Minute	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Time of Event, Second	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Time of Event, Hundredths	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Event Duration, Seconds	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Event Duration, Hundredths	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
J12.6C6 DATA ELEMENT												
Sensor Type Indicator	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Sensor Status/Command Indicator	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Sensor Channel/Code	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Sensor Channel Set	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Frequency Agility Indicator	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
PDI Indicator	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
PDI/Missile Data Link Channel	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
A/G Weapon Data Link Channel	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Weapon ID	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Radar PRF	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
ARM Threat Number	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
ARM Type	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
J12.6C7 DATA ELEMENT												
Variance XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Variance YY	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Variance ZZ	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Variance XY	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Variance XZ	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Variance YZ	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Dive Angle	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX

Table J12.6-3. Data Element Level Minimum Implementation by Status Information Discrete Value
(Sheet 27 of 40)

J12.6C5 DATA ELEMENT	STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 3, SURFACE (MARITIME)											
	6		7		8		9		10		11	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
Future Event Descriptor	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Time of Event, Minute	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Time of Event, Second	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Time of Event, Hundredths	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Event Duration, Seconds	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Event Duration, Hundredths	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
J12.6C6 DATA ELEMENT												
Sensor Type Indicator	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Sensor Status/Command Indicator	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Sensor Channel/Code	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Sensor Channel Set	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Frequency Agility Indicator	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
PDI Indicator	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
PDI/Missile Data Link Channel	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
A/G Weapon Data Link Channel	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Weapon ID	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Radar PRF	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
ARM Threat Number	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
ARM Type	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
J12.6C7 DATA ELEMENT												
Variance XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Variance YY	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Variance ZZ	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Variance XY	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Variance XZ	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Variance YZ	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Dive Angle	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX

Table J12.6-3. Data Element Level Minimum Implementation by Status Information Discrete Value
(Sheet 28 of 40)

J12.6C5 DATA ELEMENT	STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 3, SURFACE (MARITIME)							
	12		13		14		15	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
Future Event Descriptor	XX	XX	XX	XX	XX	XX	XX	XX
Time of Event, Minute	XX	XX	XX	XX	XX	XX	XX	XX
Time of Event, Second	XX	XX	XX	XX	XX	XX	XX	XX
Time of Event, Hundredths	XX	XX	XX	XX	XX	XX	XX	XX
Event Duration, Seconds	XX	XX	XX	XX	XX	XX	XX	XX
Event Duration, Hundredths	XX	XX	XX	XX	XX	XX	XX	XX
J12.6C6 DATA ELEMENT								
Sensor Type Indicator	XX	XX	XX	XX	XX	XX	XX	XX
Sensor Status/Command Indicator	XX	XX	XX	XX	XX	XX	XX	XX
Sensor Channel/Code	XX	XX	XX	XX	XX	XX	XX	XX
Sensor Channel Set	XX	XX	XX	XX	XX	XX	XX	XX
Frequency Agility Indicator	XX	XX	XX	XX	XX	XX	XX	XX
PDI Indicator	XX	XX	XX	XX	XX	XX	XX	XX
PDI/Missile Data Link Channel	XX	XX	XX	XX	XX	XX	XX	XX
Air/Ground Weapon Data Link Channel	XX	XX	XX	XX	XX	XX	XX	XX
Weapon ID	XX	XX	XX	XX	XX	XX	XX	XX
Radar PRF	XX	XX	XX	XX	XX	XX	XX	XX
ARM Threat Number	XX	XX	XX	XX	XX	XX	XX	XX
ARM Type	XX	XX	XX	XX	XX	XX	XX	XX
J12.6C7 DATA ELEMENT								
Variance XX	XX	XX	XX	XX	XX	XX	XX	XX
Variance YY	XX	XX	XX	XX	XX	XX	XX	XX
Variance ZZ	XX	XX	XX	XX	XX	XX	XX	XX
Variance XY	XX	XX	XX	XX	XX	XX	XX	XX
Variance XZ	XX	XX	XX	XX	XX	XX	XX	XX
Variance YZ	XX	XX	XX	XX	XX	XX	XX	XX
Dive Angle	XX	XX	XX	XX	XX	XX	XX	XX

Table J12.6-3. Data Element Level Minimum Implementation by Status Information Discrete Value
(Sheet 29 of 40)

J12.6I DATA ELEMENT	STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 5, LAND (GROUND)											
	0		1		2		3		4		5	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
Status Information Discrete	TR	TR	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR
Target Position Quality	##	TR	X#	TR	X#	TR	X#	TR	X#	TR	X#	##
Environment/Category	TR	TR	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR
Origin of Index Number	#R	TR	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR
Index Number	#R	TR	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR
Latitude, 0.0103 Minute	TR	TR	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR
Longitude, 0.0103 Minute	TR	TR	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR
J12.6E0 DATA ELEMENT												
Track Number, Objective	TR	TR	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR
Correlation Indicator, TN/IN	N22#	TR	X#	TR	X#	TR	X#	TR	X#	TR	X#	##
Course	TR	TR	XR	TR	XR	TR	XR	TR	XR	TR	X#	TR
Speed	TR	TR	XR	TR	XR	TR	XR	TR	XR	TR	X#	TR
Altitude, 100 Ft	TR	TR	XR	TR	XR	TR	XR	TR	XR	TR	X#	TR
Identity	TR	#22R	XR	#22R	XR	#22R	XR	#22R	XR	#22R	X#	#22R
Identity Amplifying Descriptor	TR	#22R	XR	#22R	XR	#22R	XR	#22R	XR	#22R	X#	#22R
Exercise Indicator	TR	#56R	XR	#56R	XR	#56R	XR	#56R	XR	#56R	X#56	#56R
Space Specific Type	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Air Specific Type	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Surface (Maritime) Specific Type	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Subsurface (Maritime) Specific Type	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Land (Ground) Specific Type	##	##	X#	##	X#	##	X#	##	X#	##	X#	##
Special Interest Indicator	TR	##	XR	##	XR	##	XR	##	XR	##	X#	##

Table J12.6-3. Data Element Level Minimum Implementation by Status Information Discrete Value
(Sheet 30 of 40)

J12.6I DATA ELEMENT	STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 5, LAND (GROUND)											
	6		7		8		9		10		11	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
Status Information Discrete	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR
Target Position Quality	X#	TR	X#	TR	X#	TR	X#	TR	X#	TR	XR	TR
Environment/Category	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR
Origin of Index Number	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR
Index Number	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR
Latitude, 0.0103 Minute	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR
Longitude, 0.0103 Minute	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR
J12.6E0 DATA ELEMENT												
Track Number, Objective	XR	TR	XR	TR	XR	TR	XN	NN	XR	TR	XR	TR
Correlation Indicator, TN/IN	X#	TR	X#	TR	XR	TR	XN	NN	X#	TR	XR	TR
Course	XR	##	XR	TR	XR	##	XN	NN	XR	TR	XR	##
Speed	XR	##	XR	TR	XR	##	XN	NN	XR	TR	XR	##
Altitude, 100 Ft	XR	##	XR	TR	X#	##	XR	TR	XR	TR	X#	##
Identity	XR	#22#22	XR	#22R	XR	#22#22	XN	N22N22	XR	#22R	XR	#22#22
Identity Amplifying Descriptor	XR	#22#22	XR	#22R	XR	#22#22	XN	N22N22	XR	#22R	XR	#22#22
Exercise Indicator	XR	#56#56	XR	#56R	XR	#56#56	XN	N56N56	XR	#56R	XR	#56#56
Space Specific Type	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Air Specific Type	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Surface (Maritime) Specific Type	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Subsurface (Maritime) Specific Type	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Land (Ground) Specific Type	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Special Interest Indicator	XR	##	XR	##	XR	##	XR	##	X#	##	X#	##

Table J12.6-3. Data Element Level Minimum Implementation by Status Information Discrete Value
(Sheet 31 of 40)

J12.6I DATA ELEMENT	STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 5, LAND (GROUND)							
	12		13		14		15	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
Status Information Discrete	XR	TR	XX	XX	XX	XX	XX	XX
Target Position Quality	XR	TR	XX	XX	XX	XX	XX	XX
Environment/Category	XR	TR	XX	XX	XX	XX	XX	XX
Origin of Index Number	XR	TR	XX	XX	XX	XX	XX	XX
Index Number	XR	TR	XX	XX	XX	XX	XX	XX
Latitude, 0.0103 Minute	XR	TR	XX	XX	XX	XX	XX	XX
Longitude, 0.0103 Minute	XR	TR	XX	XX	XX	XX	XX	XX
J12.6E0 DATA ELEMENT								
Track Number, Objective	XR	TR	XX	XX	XX	XX	XX	XX
Correlation Indicator, TN/IN	X#	TR	XX	XX	XX	XX	XX	XX
Course	XR	##	XX	XX	XX	XX	XX	XX
Speed	XR	##	XX	XX	XX	XX	XX	XX
Altitude, 100 Ft	XR	##	XX	XX	XX	XX	XX	XX
Identity	XR	#22#22	XX	XX	XX	XX	XX	XX
Identity Amplifying Descriptor	XR	#22#22	XX	XX	XX	XX	XX	XX
Exercise Indicator	XR	#56#56	XX	XX	XX	XX	XX	XX
Space Specific Type	XX	XX	XX	XX	XX	XX	XX	XX
Air Specific Type	XX	XX	XX	XX	XX	XX	XX	XX
Surface (Maritime) Specific Type	XX	XX	XX	XX	XX	XX	XX	XX
Subsurface (Maritime) Specific Type	XX	XX	XX	XX	XX	XX	XX	XX
Land (Ground) Specific Type	X#	##	XX	XX	XX	XX	XX	XX
Special Interest Indicator	X#	##	XX	XX	XX	XX	XX	XX

Table J12.6-3. Data Element Level Minimum Implementation by Status Information Discrete Value
(Sheet 32 of 40)

J12.6C1 DATA ELEMENT	STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 5, LAND (GROUND)											
	0		1		2		3		4		5	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
Track Number, Addressee	TR	TR	X#	TR	X#	TR	X#	TR	XX	XX	XX	XX
Pointer	TR	##	X#	X#	X#	X#	X#	X#	XX	XX	XX	XX
Weapon System	#N	N#	X#	N#	X#	N#	X#	N#	XX	XX	XX	XX
Weapon Engagement Status	#22N	N22#	X#	N22#	X#	N22#	X#	N22#	XX	XX	XX	XX
Track Number, Reference	##	N#	X#	N#	X#	N#	X#	N#	XX	XX	XX	XX
Mode III IFF Interrogation	##	##	X#	##	X#	##	X#	##	XX	XX	XX	XX
Mode IV Indicator	##	##	X#	##	X#	##	X#	##	XX	XX	XX	XX
Strength	##	##	X#	##	X#	##	X#	##	XX	XX	XX	XX
J12.6C2 DATA ELEMENT												
End of Target Reporting Cycle	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Time Indicator	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Minute	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Second	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Hundredths	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Emitter PRF	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Emitter Status	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Jammer Type	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Track Number, Index Originator	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Index Number, Third Party	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Sensor Type	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Fusion Type	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR	XR	TR

Table J12.6-3. Data Element Level Minimum Implementation by Status Information Discrete Value
(Sheet 33 of 40)

J12.6C1 DATA ELEMENT	STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 5, LAND (GROUND)											
	6		7		8		9		10		11	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
Track Number, Addressee	XX	XX	XX	XX	XX	XX	XX	XX	X#	TR	XX	XX
Pointer	XX	XX	XX	XX	XX	XX	XX	XX	X#	X#	XX	XX
Weapon System	XX	XX	XX	XX	XX	XX	XX	XX	X#	N#	XX	XX
Weapon Engagement Status	XX	XX	XX	XX	XX	XX	XX	XX	X#	N22#	XX	XX
Track Number, Reference	XX	XX	XX	XX	XX	XX	XX	XX	X#	N#	XX	XX
Mode III IFF Interrogation	XX	XX	XX	XX	XX	XX	XX	XX	X#	##	XX	XX
Mode IV Indicator	XX	XX	XX	XX	XX	XX	XX	XX	X#	##	XX	XX
Strength	XX	XX	XX	XX	XX	XX	XX	XX	X#	##	XX	XX
J12.6C2 DATA ELEMENT												
End of Target Reporting Cycle	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Time Indicator	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Minute	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Second	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Hundredths	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Emitter PRF	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Emitter Status	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Jammer Type	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Track Number, Index Originator	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Index Number, Third Party	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Sensor Type	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Fusion Type	XX	XX	XR	TR	XX	XX	XX	XX	XR	TR	XX	XX

Table J12.6-3. Data Element Level Minimum Implementation by Status Information Discrete Value
(Sheet 34 of 40)

J12.6C1 DATA ELEMENT	STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 5, LAND (GROUND)							
	12		13		14		15	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
Track Number, Addressee	XX	XX	XX	XX	XX	XX	XX	XX
Pointer	XX	XX	XX	XX	XX	XX	XX	XX
Weapon System	XX	XX	XX	XX	XX	XX	XX	XX
Weapon Engagement Status	XX	XX	XX	XX	XX	XX	XX	XX
Track Number, Reference	XX	XX	XX	XX	XX	XX	XX	XX
Mode III IFF Interrogation	XX	XX	XX	XX	XX	XX	XX	XX
Mode IV Indicator	XX	XX	XX	XX	XX	XX	XX	XX
Strength	XX	XX	XX	XX	XX	XX	XX	XX
J12.6C2 DATA ELEMENT								
End of Target Reporting Cycle	XX	XX	XX	XX	XX	XX	XX	XX
Time Indicator	XX	XX	XX	XX	XX	XX	XX	XX
Minute	XX	XX	XX	XX	XX	XX	XX	XX
Second	XX	XX	XX	XX	XX	XX	XX	XX
Hundredths	XX	XX	XX	XX	XX	XX	XX	XX
Emitter PRF	XX	XX	XX	XX	XX	XX	XX	XX
Emitter Status	XX	XX	XX	XX	XX	XX	XX	XX
Jammer Type	XX	XX	XX	XX	XX	XX	XX	XX
Track Number, Index Originator	XX	XX	XX	XX	XX	XX	XX	XX
Index Number, Third Party	XX	XX	XX	XX	XX	XX	XX	XX
Sensor Type	XX	XX	XX	XX	XX	XX	XX	XX
Fusion Type	XX	XX	XX	XX	XX	XX	XX	XX

Table J12.6-3. Data Element Level Minimum Implementation by Status Information Discrete Value
(Sheet 35 of 40)

J12.6C3 DATA ELEMENT	STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 5, LAND (GROUND)											
	0		1		2		3		4		5	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
Slant Range Position Uncertainty	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Cross Range Position Uncertainty	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Vertical Position Uncertainty	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Uncertainty Orientation	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Uncertainty Tilt	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Velocity Down	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Velocity North Uncertainty	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Velocity East Uncertainty	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Velocity Down Uncertainty	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
J12.6C4 DATA ELEMENT												
Probability of Own Forces	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Probability of Enemy Forces	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Space Ambiguous Type 1	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Air Ambiguous Type 1	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Surface (Maritime) Ambiguous Type 1	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Subsurface (Maritime) Ambiguous Type 1	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Land (Ground) Ambiguous Type 1	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Space Ambiguous Type 2	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Air Ambiguous Type 2	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Surface (Maritime) Ambiguous Type 2	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Subsurface (Maritime) Ambiguous Type 2	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Land (Ground) Ambiguous Type 2	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Ambiguous Type 1 Probability	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Ambiguous Type 2 Probability	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##

Table J12.6-3. Data Element Level Minimum Implementation by Status Information Discrete Value
(Sheet 36 of 40)

J12.6C3 DATA ELEMENT	STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 5, LAND (GROUND)											
	6		7		8		9		10		11	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
Slant Range Position Uncertainty	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Cross Range Position Uncertainty	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Vertical Position Uncertainty	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Uncertainty Orientation	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Uncertainty Tilt	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Velocity Down	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Velocity North Uncertainty	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Velocity East Uncertainty	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Velocity Down Uncertainty	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
J12.6C4 DATA ELEMENT												
Probability of Own Forces	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Probability of Enemy Forces	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Space Ambiguous Type 1	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Air Ambiguous Type 1	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Surface (Maritime) Ambiguous Type 1	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Subsurface (Maritime) Ambiguous Type 1	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Land (Ground) Ambiguous Type 1	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Space Ambiguous Type 2	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Air Ambiguous Type 2	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Surface (Maritime) Ambiguous Type 2	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Subsurface (Maritime) Ambiguous Type 2	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Land (Ground) Ambiguous Type 2	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Ambiguous Type 1 Probability	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Ambiguous Type 2 Probability	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX

Table J12.6-3. Data Element Level Minimum Implementation by Status Information Discrete Value
(Sheet 37 of 40)

J12.6C3 DATA ELEMENT	STATUS INFORMATION DISCRETE FOR ENVIRONMENT/CATEGORY = 5, LAND (GROUND)							
	12		13		14		15	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
Slant Range Position Uncertainty	XX	XX	XX	XX	XX	XX	XX	XX
Cross Range Position Uncertainty	XX	XX	XX	XX	XX	XX	XX	XX
Vertical Position Uncertainty	XX	XX	XX	XX	XX	XX	XX	XX
Uncertainty Orientation	XX	XX	XX	XX	XX	XX	XX	XX
Uncertainty Tilt	XX	XX	XX	XX	XX	XX	XX	XX
Velocity Down	XX	XX	XX	XX	XX	XX	XX	XX
Velocity North Uncertainty	XX	XX	XX	XX	XX	XX	XX	XX
Velocity East Uncertainty	XX	XX	XX	XX	XX	XX	XX	XX
Velocity Down Uncertainty	XX	XX	XX	XX	XX	XX	XX	XX
J12.6C4 DATA ELEMENT								
Probability of Own Forces	XX	XX	XX	XX	XX	XX	XX	XX
Probability of Enemy Forces	XX	XX	XX	XX	XX	XX	XX	XX
Space Ambiguous Type 1	XX	XX	XX	XX	XX	XX	XX	XX
Air Ambiguous Type 1	XX	XX	XX	XX	XX	XX	XX	XX
Surface (Maritime) Ambiguous Type 1	XX	XX	XX	XX	XX	XX	XX	XX
Subsurface (Maritime) Ambiguous Type 1	XX	XX	XX	XX	XX	XX	XX	XX
Land (Ground) Ambiguous Type 1	XX	XX	XX	XX	XX	XX	XX	XX
Space Ambiguous Type 2	XX	XX	XX	XX	XX	XX	XX	XX
Air Ambiguous Type 2	XX	XX	XX	XX	XX	XX	XX	XX
Surface (Maritime) Ambiguous Type 2	XX	XX	XX	XX	XX	XX	XX	XX
Subsurface (Maritime) Ambiguous Type 2	XX	XX	XX	XX	XX	XX	XX	XX
Land (Ground) Ambiguous Type 2	XX	XX	XX	XX	XX	XX	XX	XX
Ambiguous Type 1 Probability	XX	XX	XX	XX	XX	XX	XX	XX
Ambiguous Type 2 Probability	XX	XX	XX	XX	XX	XX	XX	XX

Table J12.6-3. Data Element Level Minimum Implementation by Status Information Discrete Value
(Sheet 38 of 40)

J12.6C5 DATA ELEMENT	STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 5, LAND (GROUND)											
	0		1		2		3		4		5	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
Future Event Descriptor	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Time of Event, Minute	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Time of Event, Second	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Time of Event, Hundredths	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Event Duration, Seconds	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Event Duration, Hundredths	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
J12.6C6 DATA ELEMENT												
Sensor Type Indicator	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Sensor Status/Command Indicator	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Sensor Channel/Code	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Sensor Channel Set	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Frequency Agility Indicator	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
PDI Indicator	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
PDI/Missile Data Link Channel	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Air-Ground Weapon Data Link Channel	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Weapon ID	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
Radar PRF	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
ARM Threat Number	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
ARM Type	X#	##	X#	##	X#	##	X#	##	X#	##	X#	##
J12.6C7 DATA ELEMENT												
Variance XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Variance YY	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Variance ZZ	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Variance XY	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Variance XZ	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Variance YZ	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Dive Angle	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX

Table J12.6-3. Data Element Level Minimum Implementation by Status Information Discrete Value
(Sheet 39 of 40)

J12.6C5 DATA ELEMENT	STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 5, LAND (GROUND)											
	6		7		8		9		10		11	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
Future Event Descriptor	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Time of Event, Minute	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Time of Event, Second	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Time of Event, Hundredths	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Event Duration, Seconds	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Event Duration, Hundredths	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
J12.6C6 DATA ELEMENT												
Sensor Type Indicator	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Sensor Status/Command Indicator	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Sensor Channel/Code	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Sensor Channel Set	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Frequency Agility Indicator	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
PDI Indicator	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
PDI/Missile Data Link Channel	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Air-Ground Weapon Data Link Channel	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Weapon ID	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
Radar PRF	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
ARM Threat Number	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
ARM Type	XX	XX	X#	##	XX	XX	XX	XX	X#	##	XX	XX
J12.6C7 DATA ELEMENT												
Variance XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Variance YY	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Variance ZZ	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Variance XY	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Variance XZ	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Variance YZ	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
Dive Angle	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX

Table J12.6-3. Data Element Level Minimum Implementation by Status Information Discrete Value
(Sheet 40 of 40)

J12.6C5 DATA ELEMENT	STATUS INFORMATION DISCRETE VALUE FOR ENVIRONMENT/CATEGORY = 5, LAND (GROUND)							
	12		13		14		15	
	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU	C ² JU	NC ² JU
Future Event Descriptor	XX	XX	XX	XX	XX	XX	XX	XX
Time of Event, Minute	XX	XX	XX	XX	XX	XX	XX	XX
Time of Event, Second	XX	XX	XX	XX	XX	XX	XX	XX
Time of Event, Hundredths	XX	XX	XX	XX	XX	XX	XX	XX
Event Duration, Seconds	XX	XX	XX	XX	XX	XX	XX	XX
Event Duration, Hundredths	XX	XX	XX	XX	XX	XX	XX	XX
J12.6C6 DATA ELEMENT								
Sensor Type Indicator	XX	XX	XX	XX	XX	XX	XX	XX
Sensor Status/Command Indicator	XX	XX	XX	XX	XX	XX	XX	XX
Sensor Channel/Code	XX	XX	XX	XX	XX	XX	XX	XX
Sensor Channel Set	XX	XX	XX	XX	XX	XX	XX	XX
Frequency Agility Indicator	XX	XX	XX	XX	XX	XX	XX	XX
PDI Indicator	XX	XX	XX	XX	XX	XX	XX	XX
PDI/Missile Data Link Channel	XX	XX	XX	XX	XX	XX	XX	XX
Air/Ground Weapon Data Link Channel	XX	XX	XX	XX	XX	XX	XX	XX
Weapon ID	XX	XX	XX	XX	XX	XX	XX	XX
Radar PRF	XX	XX	XX	XX	XX	XX	XX	XX
ARM Threat Number	XX	XX	XX	XX	XX	XX	XX	XX
ARM Type	XX	XX	X#	XX	XX	XX	XX	XX
J12.6C7 DATA ELEMENT								
Variance XX	XX	XX	XX	XX	XX	XX	XX	XX
Variance YY	XX	XX	XX	XX	XX	XX	XX	XX
Variance ZZ	XX	XX	XX	XX	XX	XX	XX	XX
Variance XY	XX	XX	XX	XX	XX	XX	XX	XX
Variance XZ	XX	XX	XX	XX	XX	XX	XX	XX
Variance YZ	XX	XX	XX	XX	XX	XX	XX	XX
Dive Angle	XX	XX	XX	XX	XX	XX	XX	XX

MIL-STD-6016B

APPENDIX A

TABLE A.5-J12.7. Word, Data Element, and Data Item Minimum Implementation
(Sheet 1 of 2)

WORD LEVEL

<u>WORD</u>	<u>MIN IMP</u>
J12.7I	TR
J12.7E0	TR
J12.7E1	TR
J12.7C1	##
J12.7C2	##
J12.7C3	##

DATA ELEMENT LEVEL

<u>J12.7I</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
INDEX NUMBER	TR
FUSION TYPE	TR
MERGED MEASUREMENT INDICATOR	##
END OF TARGET REPORTING CYCLE	##
SENSOR TYPE	TR
JAMMER TYPE	##
LATITUDE, 0.0103 MINUTE	TR
LONGITUDE, 0.0103 MINUTE	TR

<u>J12.7E0</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
ALTITUDE, ANGLE ORIGIN	TR
ELEVATION ANGLE, 2	TR
BEARING, INTERCEPT	TR
ELEVATION UNCERTAINTY	TR
BEARING UNCERTAINTY	TR
FREQUENCY, INTERCEPT	#80#80
FREQUENCY EXPONENT	#81#81

<u>J12.7E1</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
TIME INDICATOR	TR
MINUTE	TR
SECOND	TR
HUNDREDTHS	TR
BEARING ANGLE RATE	##
BEARING ANGLE RATE UNCERTAINTY	#74#74
ELEVATION ANGLE RATE	##
ELEVATION ANGLE RATE UNCERTAINTY	#74#74
EMITTER PRF	##
EMITTER STATUS	##

MIL-STD-6016B

APPENDIX A

TABLE A.5-J12.7. Word, Data Element, and Data Item Minimum Implementation
(Sheet 2 of 2)

DATA ELEMENT LEVEL (continued)

<u>J12.7C1</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
RANGE, 1	TR
RANGE UNCERTAINTY	TR
RANGE RATE	##
RANGE RATE UNCERTAINTY	#74#74
OBSERVER VELOCITY NORTH	##
OBSERVER VELOCITY EAST	##
 <u>J12.7C2</u> <u>DATA ELEMENT</u>	 <u>MIN IMP</u>
PROBABILITY OF OWN FORCES	TR
PROBABILITY OF ENEMY FORCES	TR
SPACE AMBIGUOUS TYPE 1	#83#83
AIR AMBIGUOUS TYPE 1	#83#83
SURFACE (MARITIME) AMBIGUOUS TYPE 1	#83#83
SUBSURFACE (MARITIME) AMBIGUOUS TYPE 1	#83#83
LAND (GROUND) AMBIGUOUS TYPE 1	#83#83
SPACE AMBIGUOUS TYPE 2	#83#83
AIR AMBIGUOUS TYPE 2	#83#83
SURFACE (MARITIME) AMBIGUOUS TYPE 2	#83#83
SUBSURFACE (MARITIME) AMBIGUOUS TYPE 2	#83#83
LAND (GROUND) AMBIGUOUS TYPE 2	#83#83
AMBIGUOUS TYPE 1 PROBABILITY	##
AMBIGUOUS TYPE 2 PROBABILITY	##
ENVIRONMENT/CATEGORY	#83#83
 <u>J12.7C3</u> <u>DATA ELEMENT</u>	 <u>MIN IMP</u>
OBSERVER VELOCITY DOWN	TR

MIL-STD-6016B

APPENDIX A

TABLE A.5-J13.0. Word, Data Element, and Data Item Minimum Implementation
(Sheet 1 of 3)

WORD LEVEL

<u>WORD</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
J13.0I	TR		XR
J13.0E0	TR		XR
J13.0C1	##		X#
J13.0C2	##		X#

DATA ELEMENT LEVEL

<u>J13.0I</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
AIRFIELD STATUS	TR		XR
AIR RAID STATE	##		X#
NUCLEAR CONTAMINATION INDICATOR	##		X#
BIOLOGICAL CONTAMINATION INDICATOR	##		X#
CHEMICAL CONTAMINATION INDICATOR	##		X#
TRACK NUMBER, REFERENCE	TR		XR
BASE WEATHER STATE	TR		XR
CRASH SERVICE	##		X#
SHORADEZ	##		X#
TIME OF OBSERVATION, HOUR	#108#108		X#108
TIME OF OBSERVATION, MINUTE	#108#108		X#108
QNH	T#		X#
LANDING APPROACH CONDITION	##		X#
SECONDARY RUNWAY INDICATOR	##		X#

<u>J13.0E0</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
ICAO CODE	T#		X#
ACTIVE RUNWAY DIRECTION	TR		XR
ACTIVE RUNWAY AVAILABLE LENGTH	T#		X#
ACTIVE RUNWAY STATUS	TR		XR
ACTIVE RUNWAY GCA/FLIGHT DECK PAR	T#		X#
ACTIVE RUNWAY ILS/FLIGHT DECK	T#		X#
PRECISION APPROACH AID (MADGE)			
ACTIVE RUNWAY APPROACH LIGHTING	T#		X#
ACTIVE RUNWAY ARRESTER BARRIER	T#		X#
ACTIVE RUNWAY ARRESTER WIRES	T#		X#
ACTIVE RUNWAY VISUAL RANGE	T#		X#
QFE	##		X#
FLIGHT DECK GLIDE PATH INDICATOR	##		X#
DESIGNATED FLYING COURSE	##		X#

MIL-STD-6016B

APPENDIX A

TABLE A.5-J13.0. Word, Data Element, and Data Item Minimum Implementation
(Sheet 2 of 3)

DATA ELEMENT LEVEL (continued)

<u>J13.0C1</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
WIND DIRECTION	T#		X#
WIND SPEED	T#		X#
WIND GUST INCREMENT	T#		X#
CLOUD COVER, 1	T#		X#
CLOUD HEIGHT, 1	T#		X#
CLOUD COVER, 2	T#		X#
CLOUD HEIGHT, 2	T#		X#
CLOUD COVER, 3	T#		X#
CLOUD HEIGHT, 3	T#		X#
VISIBILITY	T#		X#
BASE ACTUAL WEATHER	T#		X#
BASE ACTUAL WEATHER DESCRIPTOR	T#		X#
BASE ACTUAL WEATHER INTENSITY/ PROXIMITY	T#		X#
WIND SHEAR INDICATOR	T#		X#

<u>J13.0C2</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
AVTUR	##		X#
LIQUID OXYGEN	##		X#
NITROGEN	##		X#
AIM-9L AIR-TO-AIR MISSILE	##		X#
AIM-9M AIR-TO-AIR MISSILE	##		X#
AIM-9P AIR-TO-AIR MISSILE	##		X#
SKY FLASH AIR-TO-AIR MISSILE	##		X#
AMRAAM AIR-TO-AIR MISSILE	##		X#
ASRAAM AIR-TO-AIR MISSILE	##		X#
MAGIC I AIR-TO-AIR MISSILE	##		X#
MAGIC II AIR-TO-AIR MISSILE	##		X#
SUPER 530 AIR-TO-AIR MISSILE	##		X#
SUPER 530D AIR-TO-AIR MISSILE	##		X#
MICA AIR-TO-AIR MISSILE	##		X#
TBD AIR-TO-AIR MISSILE	##		X#
TBD AIR-TO-AIR MISSILE	##		X#
TBD AIR-TO-AIR MISSILE	##		X#
TBD AIR-TO-AIR MISSILE	##		X#
DURANDAL AIR-TO-SURFACE MISSILE	##		X#
BAP 100 AIR-TO-SURFACE MISSILE	##		X#
TBD AIR-TO-SURFACE MISSILE	##		X#
TBD AIR-TO-SURFACE MISSILE	##		X#
TBD AIR-TO-SURFACE MISSILE	##		X#
TBD AIR-TO-SURFACE MISSILE	##		X#
ANTI-SUBMARINE DEPTH CHARGE	##		X#
NDB	##		X#
CONVENTIONAL 500 POUND BOMB	##		X#

MIL-STD-6016B

APPENDIX A

TABLE A.5-J13.0. Word, Data Element, and Data Item Minimum Implementation
(Sheet 3 of 3)

DATA ELEMENT LEVEL (continued)

<u>J13.0C2 (continued)</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
CONVENTIONAL 1000 POUND BOMB	##		X#
20 MILLIMETER AMMUNITION	##		X#
27 MILLIMETER AMMUNITION	##		X#
30 MILLIMETER AMMUNITION	##		X#

MIL-STD-6016B

APPENDIX A

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

APPENDIX A

TABLE A.5-J13.2. Word, Data Element, and Data Item Minimum Implementation
(Sheet 1 of 4)

WORD LEVEL

<u>WORD</u>	<u>MIN IMP</u>
J13.2I	TR
J13.2C1	##
J13.2C2	##
J13.2C3	##
J13.2C4	##
J13.2C5	##
J13.2C6	##
J13.2C7	##

DATA ELEMENT LEVEL

<u>J13.2I</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
OPERATIONAL CAPABILITY, AIRCRAFT	TR		T#
TRACK NUMBER, REFERENCE	TR		TR
FUEL FUNCTION	T50R		T50#
FUEL	T46R		T#
RADAR CHANNEL INDICATOR	##		##
RADAR CHANNEL	#22#		#22#
TIME REPORT FUNCTION	TR		T#
MINUTE	TR		T#
HOUR	TR		T#

<u>J13.2C1</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
RADAR STATUS	##		##
INFRARED STATUS	##		##
MISSILE CHANNEL	##		##
LASER STATUS	##		##
TELEVISION STATUS	##		##
RADAR WARNING AND RECEIVING STATUS	##		##
AIR-TO-AIR WEAPON RELEASE SYSTEM STATUS	##		##
AIR-TO-GROUND WEAPON RELEASE SYSTEM STATUS	##		##
RADIO TYPE, 1	##		##
RADIO STATUS, 1	##		##
SECURE RADIO INDICATOR, 1	##		##
RADIO TYPE, 2	##		##
RADIO STATUS, 2	##		##
SECURE RADIO INDICATOR, 2	##		##
RADIO TYPE, 3	##		##
RADIO STATUS, 3	##		##
SECURE RADIO INDICATOR, 3	##		##

MIL-STD-6016B

APPENDIX A

TABLE A.5-J13.2. Word, Data Element, and Data Item Minimum Implementation
(Sheet 2 of 4)

DATA ELEMENT LEVEL (continued)

<u>J13.2C1 (continued)</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
AUTOPILOT STATUS	#22#		#22#
SENSOR TARGET REPORTING STATUS	##		##
AIRCRAFT MODEL	##		##
AIR SPECIFIC TYPE	T13#		T13#

<u>J13.2C2</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
SUMMATION INDICATOR	##		##
NUMBER OF STORES, 1	##		##
TYPE OF STORES, 1	##		##
NUMBER OF STORES, 2	##		##
TYPE OF STORES, 2	##		##
NUMBER OF STORES, 3	##		##
TYPE OF STORES, 3	##		##
NUMBER OF STORES, 4	##		##
TYPE OF STORES, 4	##		##
GUN CAPABLE	##		##
IFF/SIF TRANSPONDER STATUS	##		##
IFF/SIF INTERROGATOR STATUS	##		##

<u>J13.2C3</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
CONVENTIONAL DEPTH BOMB INVENTORY	##		##
SPECIAL DEPTH BOMB INVENTORY	##		##
CONVENTIONAL TORPEDO INVENTORY	##		##
SPECIAL TORPEDO INVENTORY	##		##
CONVENTIONAL MISSILE INVENTORY	##		##
SPECIAL MISSILE INVENTORY	##		##
ROCKET INVENTORY	##		##
ACTIVE SONOBUOY INVENTORY	##		##
PASSIVE SONOBUOY INVENTORY	##		##
RADAR STATUS INDICATOR	##		##
ELECTRONIC WARFARE SUPPORT, STATUS	##		##
INFRARED STATUS INDICATOR	##		##
LOW FREQUENCY ANALYSIS AND RECORDING STATUS	##		##
MAGNETIC ANOMALY DETECTOR STATUS	##		##
SEARCH LIGHT STATUS	##		##
LOW LIGHT LEVEL TELEVISION STATUS	##		##
DIFAR/CODAR STATUS	##		##
ACTIVE SONOBUOY STATUS	##		##
RECORDER STATUS, 1	##		##
RECORDER STATUS, 2	##		##
RECORDER STATUS, 3	##		##

MIL-STD-6016B

APPENDIX A

TABLE A.5-J13.2. Word, Data Element, and Data Item Minimum Implementation
(Sheet 3 of 4)

DATA ELEMENT LEVEL (continued)

<u>J13.2C3 (continued)</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
RECORDER STATUS, 4	##		##
SONAR STATUS	##		##
SPECIAL SONOBUOY STATUS, 1	##		##
SPECIAL SONOBUOY STATUS, 2	##		##
SPECIAL PROCESSOR STATUS, 1	##		##
SPECIAL PROCESSOR STATUS, 2	##		##
RADAR WATCH ALTITUDE	##		##

<u>J13.2C4</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
ES FREQUENCY BAND A	TR		TR
ES FREQUENCY BAND B	TR		TR
ES FREQUENCY BAND C	TR		TR
ES FREQUENCY BAND D	TR		TR
ES FREQUENCY BAND E	TR		TR
ES FREQUENCY BAND F	TR		TR
ES FREQUENCY BAND G	TR		TR
ES FREQUENCY BAND H	TR		TR
ES FREQUENCY BAND I	TR		TR
ES FREQUENCY BAND J	TR		TR
ES FREQUENCY BAND K	TR		TR
ES FREQUENCY BAND L	TR		TR
ES FREQUENCY BAND M	TR		TR
HF DIRECTION FINDER	TR		TR
VHF DIRECTION FINDER	TR		TR
UHF DIRECTION FINDER	TR		TR
EA FREQUENCY BAND A	TR		TR
EA FREQUENCY BAND B	TR		TR
EA FREQUENCY BAND C	TR		TR
EA FREQUENCY BAND D	TR		TR
EA FREQUENCY BAND E	TR		TR
EA FREQUENCY BAND F	TR		TR
EA FREQUENCY BAND G	TR		TR
EA FREQUENCY BAND H	TR		TR
EA FREQUENCY BAND I	TR		TR
EA FREQUENCY BAND J	TR		TR
EA FREQUENCY BAND K	TR		TR
EA FREQUENCY BAND L	TR		TR
EA FREQUENCY BAND M	TR		TR
DECOY, CHAFF	TR		TR
DECOY, IR	TR		TR

MIL-STD-6016B

APPENDIX A

TABLE A.5-J13.2. Word, Data Element, and Data Item Minimum Implementation
(Sheet 4 of 4)

DATA ELEMENT LEVEL (continued)

<u>J13.2C5</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
LINK 14 STATUS	##		##
LINK 11 STATUS	##		##
LINK 16 STATUS	##		##
IJMS STATUS	##		##
LINK 4 STATUS	##		##
COMMUNICATIONS IMPAIRMENT	##		##
CONTROL POSITIONS, 1	##		##
MODE IV INTERROGATOR STATUS	##		##
COMPUTER STATUS	##		##
CONSOLE STATUS	##		##

<u>J13.2C6</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
LINK 16 CONTROL STATUS	##		##
LINK 4A CONTROL STATUS	##		##
LINK 4C STATUS	##		##
VOICE GROUP A CHANNEL	##		##
VOICE GROUP B CHANNEL	##		##
VMF STATUS	##		##
DECOY EA STATUS	##		##
MISSILE WARNING SYSTEM STATUS	##		##
TELEMETRY POD SUBSYSTEM STATUS	##		##
LASER SPOT TRACKER SUBSYSTEM STATUS	##		##
GLOBAL POSITIONING SUBSYSTEM STATUS	##		##
RECCE SYSTEM TYPE	##		##
RECCE SYSTEM STATUS	##		##
DEFENSIVE JAMMER SYSTEM 1 TYPE	##		##
DEFENSIVE JAMMER SYSTEM 1 STATUS	##		##
DEFENSIVE JAMMER SYSTEM 2 TYPE	##		##
DEFENSIVE JAMMER SYSTEM 2 STATUS	##		##

<u>J13.2C7</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
SUMMATION INDICATOR	##		##
NUMBER OF STORES, 5	##		##
TYPE OF STORES, 5	##		##
NUMBER OF STORES, 6	##		##
TYPE OF STORES, 6	##		##
NUMBER OF STORES, 7	##		##
TYPE OF STORES, 7	##		##
NUMBER OF STORES, 8	##		##
TYPE OF STORES, 8	##		##

MIL-STD-6016B

APPENDIX A

TABLE A.5-J13.3. Word, Data Element, and Data Item Minimum Implementation
(Sheet 1 of 4)

WORD LEVEL

<u>WORD</u>	<u>MIN IMP</u>
J13.3I	TR
J13.3C1	##
J13.3C2	##
J13.3C3	##
J13.3C4	##
J13.3C5	##
J13.3C6	##
J13.3C7	##

DATA ELEMENT LEVEL

<u>J13.3I</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
TRACK NUMBER, REFERENCE	TR		TR
FLIGHT DECK STATUS	##		##
LANDING APPROACH CONDITION	##		##
TIME REPORT FUNCTION	##		##
MINUTE	##		##
HOURL	##		##
SURFACE (MARITIME) SPECIFIC TYPE	T13#		T13#

<u>J13.3C1</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
MISSILE TYPE, 1	TR		TR
OPERATIONAL MISSILE INVENTORY, 1	TR		TR
NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 1	TR		TR
MISSILE TYPE, 2	##		##
OPERATIONAL MISSILE INVENTORY, 2	##		##
NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 2	##		##
MISSILE TYPE, 3	##		##
OPERATIONAL MISSILE INVENTORY, 3	##		##
NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 3	##		##
FUEL FUNCTION	##		##
FUEL, SURFACE (MARITIME)	#31#31		#31#31

MIL-STD-6016B

APPENDIX A

TABLE A.5-J13.3. Word, Data Element, and Data Item Minimum Implementation
(Sheet 2 of 4)

DATA ELEMENT LEVEL (continued)

<u>J13.3C2</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
COMMAND AND CONTROL SYSTEM	##		##
DATA LINK AND DISPLAY SYSTEM	##		##
NAVIGATION SYSTEM	##		##
COMMUNICATION SYSTEM	##		##
SURFACE SEARCH RADAR	##		##
2D AIR SEARCH RADAR	##		##
3D AIR SEARCH RADAR	##		##
PRECISION APPROACH RADAR	##		##
IFF/SIF INTERROGATOR AND TRANSPONDER SYSTEM	##		##
SONAR SYSTEM	##		##
ELECTRONIC ATTACK	##		##
ELECTRONIC WARFARE SUPPORT AND OTHER ELECTRONIC ATTACK	##		##
GUN FIRE CONTROL SYSTEM	##		##
GUNS	##		##
MISSILE, ROCKET, AND LAUNCHERS	##		##
CRUISE MISSILES	##		##
EMBARKED ASSAULT CRAFT	##		##
ENERGY GENERATION SYSTEM-NUCLEAR	##		##
ENERGY GENERATION SYSTEM- CONVENTIONAL	##		##
TOMAHAWK WEAPON CONTROL SYSTEM	##		##
HARPOON WEAPON CONTROL SYSTEM	##		##
AIRCRAFT HANDLING, LAUNCH, AND RECOVERY SYSTEMS	##		##
FIGHTER AIRCRAFT	##		##
ATTACK, STRIKE/FIGHTER AIRCRAFT	##		##
FIXED WING ANTI-SUBMARINE WARFARE AIRCRAFT	##		##
HELICOPTER ANTI-SUBMARINE WARFARE AIRCRAFT	##		##
AIRBORNE EARLY WARNING AIRCRAFT	##		##
ELECTRONIC SUPPORT AIRCRAFT	##		##
TANKER AIRCRAFT	##		##
HELICOPTER SUPPORT AIRCRAFT	##		##

<u>J13.3C3</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
ES FREQUENCY BAND A	TR		TR
ES FREQUENCY BAND B	TR		TR
ES FREQUENCY BAND C	TR		TR
ES FREQUENCY BAND D	TR		TR
ES FREQUENCY BAND E	TR		TR
ES FREQUENCY BAND F	TR		TR

MIL-STD-6016B

APPENDIX A

TABLE A.5-J13.3. Word, Data Element, and Data Item Minimum Implementation
(Sheet 3 of 4)

DATA ELEMENT LEVEL (continued)

<u>J13.3C3 (continued)</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
ES FREQUENCY BAND G	TR		TR
ES FREQUENCY BAND H	TR		TR
ES FREQUENCY BAND I	TR		TR
ES FREQUENCY BAND J	TR		TR
ES FREQUENCY BAND K	TR		TR
ES FREQUENCY BAND L	TR		TR
ES FREQUENCY BAND M	TR		TR
HF DIRECTION FINDER	TR		TR
VHF DIRECTION FINDER	TR		TR
UHF DIRECTION FINDER	TR		TR
EA FREQUENCY BAND A	TR		TR
EA FREQUENCY BAND B	TR		TR
EA FREQUENCY BAND C	TR		TR
EA FREQUENCY BAND D	TR		TR
EA FREQUENCY BAND E	TR		TR
EA FREQUENCY BAND F	TR		TR
EA FREQUENCY BAND G	TR		TR
EA FREQUENCY BAND H	TR		TR
EA FREQUENCY BAND I	TR		TR
EA FREQUENCY BAND J	TR		TR
EA FREQUENCY BAND K	TR		TR
EA FREQUENCY BAND L	TR		TR
EA FREQUENCY BAND M	TR		TR
DECOY, CHAFF	TR		TR
DECOY, IR	TR		TR

<u>J13.3C4</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
VOICE GROUP A CHANNEL	##		##
VOICE GROUP B CHANNEL	##		##

<u>J13.3C5</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
MISSILE TYPE, 4	TR		TR
OPERATIONAL MISSILE INVENTORY, 4	TR		TR
NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 4	TR		TR
MISSILE TYPE, 5	##		##
OPERATIONAL MISSILE INVENTORY, 5	##		##
NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 5	##		##
MISSILE TYPE, 6	##		##
OPERATIONAL MISSILE INVENTORY, 6	##		##

MIL-STD-6016B

APPENDIX A

TABLE A.5-J13.3. Word, Data Element, and Data Item Minimum Implementation
(Sheet 4 of 4)

DATA ELEMENT LEVEL (continued)

<u>J13.3C5 (continued)</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 6	##		##

<u>J13.3C6</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
MISSILE TYPE, 7	TR		TR
OPERATIONAL MISSILE INVENTORY, 7	TR		TR
NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 7	TR		TR
MISSILE TYPE, 8	##		##
OPERATIONAL MISSILE INVENTORY, 8	##		##
NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 8	##		##
MISSILE TYPE, 9	##		##
OPERATIONAL MISSILE INVENTORY, 9	##		##
NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 9	##		##

<u>J13.3C7</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
MISSILE TYPE, 10	TR		TR
OPERATIONAL MISSILE INVENTORY, 10	TR		TR
NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 10	TR		TR
MISSILE TYPE, 11	##		##
OPERATIONAL MISSILE INVENTORY, 11	##		##
NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 11	##		##
MISSILE TYPE, 12	##		##
OPERATIONAL MISSILE INVENTORY, 12	##		##
NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 12	##		##

MIL-STD-6016B

APPENDIX A

TABLE A.5-J13.4. Word, Data Element, and Data Item Minimum Implementation
(Sheet 1 of 2)

WORD LEVEL

<u>WORD</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
J13.4I	TR		TR
J13.4C1	##		##
J13.4C2	##		##

DATA ELEMENT LEVEL

<u>J13.4I</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
TRACK NUMBER, REFERENCE	TR		TR
SUBSURFACE (MARITIME) SPECIFIC TYPE	T13#		T13#

<u>J13.4C1</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
MISSILE TYPE, 1	##		##
OPERATIONAL MISSILE INVENTORY, 1	##		##
MISSILE TYPE, 2	##		##
OPERATIONAL MISSILE INVENTORY, 2	##		##
MISSILE TYPE, 3	##		##
OPERATIONAL MISSILE INVENTORY, 3	##		##
TORPEDO TYPE, 1	##		##
TORPEDO INVENTORY, 1	##		##
TORPEDO TYPE, 2	##		##
TORPEDO INVENTORY, 2	##		##
TORPEDO TUBE	##		##
VERTICAL LAUNCHER	##		##
FIRE CONTROL SYSTEM	##		##

<u>J13.4C2</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
COMMAND AND CONTROL SYSTEM	##		##
DATA LINK AND DISPLAY SYSTEM	##		##
NAVIGATION SYSTEM	##		##
COMMUNICATION SYSTEM	##		##
SURFACE SEARCH RADAR	##		##
IFF/SIF INTERROGATOR AND TRANSPONDER SYSTEM	##		##
ELECTRONIC WARFARE SUPPORT AND OTHER ELECTRONIC ATTACK	##		##
ENERGY GENERATION SYSTEM-NUCLEAR	##		##
ENERGY GENERATION SYSTEM- CONVENTIONAL	##		##
ES FREQUENCY BAND A	##		##

APPENDIX A

TABLE A.5-J13.4. Word, Data Element, and Data Item Minimum Implementation
(Sheet 2 of 2)

DATA ELEMENT LEVEL (continued)

<u>J13.4C2 (continued)</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
ES FREQUENCY BAND B	##		##
ES FREQUENCY BAND C	##		##
ES FREQUENCY BAND D	##		##
ES FREQUENCY BAND E	##		##
ES FREQUENCY BAND F	##		##
ES FREQUENCY BAND G	##		##
ES FREQUENCY BAND H	##		##
ES FREQUENCY BAND I	##		##
ES FREQUENCY BAND J	##		##
ES FREQUENCY BAND K	##		##
ES FREQUENCY BAND L	##		##
ES FREQUENCY BAND M	##		##
HF DIRECTION FINDER	##		##
VHF DIRECTION FINDER	##		##
UHF DIRECTION FINDER	##		##
ACTIVE SONAR	##		##
HULL MOUNTED PASSIVE SONAR	##		##
TOWED ARRAY SONAR	##		##

MIL-STD-6016B

APPENDIX A

TABLE A.5-J13.5. Word, Data Element, and Data Item Minimum Implementation
(Sheet 1 of 2)

WORD LEVEL

<u>WORD</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
J13.5I	TR		TR
J13.5C1	TR		T#
J13.5C2	##		##

DATA ELEMENT LEVEL

<u>J13.5I</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
OPERATIONAL CAPABILITY	TR		TR
TRACK NUMBER, REFERENCE	TR		TR
SITE TYPE	T13#		T13#
HOT INVENTORY	##		##
SAM MODE STATE	##		##
TIME FUNCTION	##		##
MINUTE	##		##
HOURL	##		##
PERIMETER ENGAGEMENT STATUS	##		##

<u>J13.5C1</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
COLD INVENTORY	##		##
OPERATIONAL IMPAIRMENT	TR		TR
NATO LINK 1 STATUS	##		##
LINK 14 STATUS	##		##
LINK 11 STATUS	##		##
LINK 11B STATUS	##		##
LINK 16 STATUS	##		##
ATDL 1 STATUS	##		##
IJMS STATUS	##		##
COMMUNICATIONS IMPAIRMENT	##		##
CONTROL POSITIONS	##		##
TIME FUNCTION	##		##
MINUTE	##		##
HOURL	##		##
PRIMARY SURVEILLANCE RADAR STATUS	##		##
SECONDARY SURVEILLANCE RADAR STATUS	##		##
TERTIARY SURVEILLANCE RADAR STATUS	##		##
ACQUISITION RADAR STATUS	##		##
ILLUMINATING RADAR STATUS	##		##
MODE IV INTERROGATOR STATUS	##		##
IFF/SIF INTERROGATOR STATUS	##		##

MIL-STD-6016B

APPENDIX A

TABLE A.5-J13.5. Word, Data Element, and Data Item Minimum Implementation
(Sheet 2 of 2)

DATA ELEMENT LEVEL (continued)

<u>J13.5C2</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
ES FREQUENCY BAND A	TR		TR
ES FREQUENCY BAND B	TR		TR
ES FREQUENCY BAND C	TR		TR
ES FREQUENCY BAND D	TR		TR
ES FREQUENCY BAND E	TR		TR
ES FREQUENCY BAND F	TR		TR
ES FREQUENCY BAND G	TR		TR
ES FREQUENCY BAND H	TR		TR
ES FREQUENCY BAND I	TR		TR
ES FREQUENCY BAND J	TR		TR
ES FREQUENCY BAND K	TR		TR
ES FREQUENCY BAND L	TR		TR
ES FREQUENCY BAND M	TR		TR
HF DIRECTION FINDER	TR		TR
VHF DIRECTION FINDER	TR		TR
UHF DIRECTION FINDER	TR		TR
EA FREQUENCY BAND A	TR		TR
EA FREQUENCY BAND B	TR		TR
EA FREQUENCY BAND C	TR		TR
EA FREQUENCY BAND D	TR		TR
EA FREQUENCY BAND E	TR		TR
EA FREQUENCY BAND F	TR		TR
EA FREQUENCY BAND G	TR		TR
EA FREQUENCY BAND H	TR		TR
EA FREQUENCY BAND I	TR		TR
EA FREQUENCY BAND J	TR		TR
EA FREQUENCY BAND K	TR		TR
EA FREQUENCY BAND L	TR		TR
EA FREQUENCY BAND M	TR		TR
DECOY, CHAFF	TR		TR
DECOY, IR	TR		TR

APPENDIX A

J14.0 Word, Data Element, and Data Item Minimum Implementation

To determine the words, data elements, and data items in the J14.0 message that are required for implementation, first, enter Table A.5-J14.0-1 from the left to determine the implementation for each Fix or Bearing Descriptor value. Next, enter Table A.5-J14.0-2 from the left at each value that will be implemented and proceed across the row to determine the required word implementation. Then, enter Table A.5-J14.0-3 from the top at an action value that will be implemented and proceed down the column to determine the required data element implementation for each word. At each level, the transmit and receive requirements are considered separately, with no interaction between them.

MIL-STD-6016B

APPENDIX A

TABLE A.5-J14.0-1. Fix or Bearing Descriptor Value Minimum Implementation
for the J14.0 Message

FIX OR BEARING DESCRIPTOR VALUE	MIN IMP
0 - EW FIX	##
1 - AREA OF PROBABILITY	##
2 - BEARING, TYPE NOT SPECIFIED	#R
3 - BEARING, ES	#R
4 - BEARING, EA	#R
5 - BEARING, RADIO DIRECTION FINDING	##
6 - DISUSED	XX
7 - BEARING, UNKNOWN	##

TABLE A.5-J14.0-2. Word Level Minimum Implementation by Fix or Bearing Descriptor Value

FIX OR BEARING DESCRIPTOR VALUE	J14.0 WORDS							
	J14.0I	J14.0E0	J14.0C1	J14.0C2	J14.0C3	J14.0C4	J14.0C5	J14.0C6
0 - EW FIX	TR	TR	##	TR	##	##	##	##
1 - AREA OF PROBABILITY	TR	TR	##	TR	##	##	##	##
2 - BEARING, TYPE NOT SPECIFIED	TR	TR	TR	TR	##	##	##	XX
3 - BEARING, ES	TR	TR	TR	TR	##	##	##	XX
4 - BEARING, EA	TR	TR	TR	TR	##	##	##	XX
5 - BEARING, RADIO DIRECTION FINDING	TR	TR	TR	TR	##	XX	##	##
6 - DISUSED	XX	XX	XX	XX	XX	XX	XX	XX
7 - BEARING, UNKNOWN	TR	TR	##	TR	##	##	##	XX

MIL-STD-6016B

APPENDIX A

TABLE A.5-J14.0-3. Data Element Level Minimum Implementation by Fix or Bearing Descriptor Value (Sheet 1 of 6)

J14.0I DATA ELEMENT	FIX OR BEARING DESCRIPTOR VALUE			
	0	1	2	3
THREAT EVALUATION	##	##	##	##
RESPONSE INDICATOR, EWAC	TR	TR	TR	TR
SPECIAL PROCESSING INDICATOR	TR	TR	TR	TR
AGILE EMITTER	##	##	##	##
TRACK NUMBER, REFERENCE/INDEX NUMBER INDICATOR	TR	TR	TR	TR
TRACK NUMBER, REFERENCE	#57#	#57#	#57#	#57#
INDEX NUMBER	#57#	#57#	#57#	#57#
BEARING ORIGIN	N22N	N22N	TR	TR
SQUARE/CIRCLE SWITCH	NN	TR	NN	NN
SECOND	TR	TR	TR	TR
MINUTE	TR	TR	TR	TR
HOUR	TR	TR	TR	TR
REQUEST NUMBER	TR	TR	TR	TR
ENVIRONMENT/CATEGORY	TR	TR	TR	TR
LOCK-ON	##	##	##	##
J14.0E0 DATA ELEMENT				
TRACK NUMBER, ORIGIN	NN	NN	TR	TR
FREQUENCY/FREQUENCY RANGE INDICATOR	TR	TR	TR	TR
FREQUENCY MULTIPLIER, 1	TR	TR	TR	TR
FREQUENCY, 1	TR	TR	TR	TR
FREQUENCY MULTIPLIER, 2	TR	TR	TR	TR
FREQUENCY, 2	TR	TR	TR	TR
J14.0C1 DATA ELEMENT				
PARAMETER SOURCE	##	##	##	##
BEARING ACCURACY	NN	NN	TR	TR
BEARING	N22N	N22N	TR	TR
SECTOR WIDTH	NN	NN	NN	NN
ELEVATION ANGLE/ALTITUDE INDICATOR	#58#	#58#	#58#	#58#
ELEVATION ANGLE	##	##	##	##
ALTITUDE, 25 FT	#23#	#23#	#23#	#23#
COURSE	##	##	NN	NN
SPEED	##	##	NN	NN
J14.0C2 DATA ELEMENT				
LATITUDE, 0.0051 MINUTE	TR	TR	TR	TR
LONGITUDE, 0.0051 MINUTE	TR	TR	TR	TR
AREA MAJOR AXIS	NN	TR	NN	NN
AREA MINOR AXIS	NN	TR	NN	NN
AXIS ORIENTATION	NN	TR	NN	NN

MIL-STD-6016B

APPENDIX A

TABLE A.5-J14.0-3. Data Element Level Minimum Implementation by Fix or Bearing Descriptor Value (Sheet 2 of 6)

J14.0C3 DATA ELEMENT	FIX OR BEARING DESCRIPTOR VALUE			
	0	1	2	3
EMITTER FUNCTION	##	##	##	##
MODE NUMBER	##	##	##	##
MODULATION CODE	##	##	##	##
MULTIPLE EVALUATION	#22#	#22#	#22#	#22#
BROAD CLASSIFICATION	##	##	##	##
AMPLIFYING CHARACTERISTICS	##	##	##	##
EMITTER CONFIDENCE	##	##	##	##
EMITTER NUMBER	##	##	##	##
EMITTER NUMBER INDICATOR	#49#	#49#	#49#	#49#
WARTIME RESERVE MODE INDICATOR	#49#	#49#	#49#	#49#
J14.0C4 DATA ELEMENT				
PRF/PRI INDICATOR	#22#	#22#	#22#	#22#
PULSE REPETITION FREQUENCY	##	##	##	##
PULSE REPETITION INTERVAL	##	##	##	##
PULSE WIDTH	##	##	##	##
JITTER	##	##	##	##
SCAN TYPE	##	##	##	##
ANTENNA SCAN RATE/PERIOD INDICATOR	##	##	##	##
ANTENNA SCAN RATE	#22#	#22#	#22#	#22#
ANTENNA SCAN PERIOD	##	##	##	##
POLARIZATION	##	##	##	##
JAMMER RECEIVED SIGNAL LEVEL	##	##	##	##
J14.0C5 DATA ELEMENT				
NATIONALITY/ALLIANCE OF TRACK	##	##	##	##
PLATFORM EVALUATION CONFIDENCE	##	##	##	##
SPACE PLATFORM	##	##	##	##
AIR PLATFORM	##	##	##	##
SURFACE (MARITIME) PLATFORM	##	##	##	##
SUBSURFACE (MARITIME) PLATFORM	##	##	##	##
LAND (GROUND) PLATFORM	##	##	##	##
SPACE PLATFORM ACTIVITY	##	##	##	##
AIR PLATFORM ACTIVITY	##	##	##	##
SURFACE (MARITIME) PLATFORM ACTIVITY	##	##	##	##
SUBSURFACE (MARITIME) PLATFORM ACTIVITY	##	##	##	##
LAND (GROUND) PLATFORM ACTIVITY	##	##	##	##
SPACE SPECIFIC TYPE	##	##	##	##
AIR SPECIFIC TYPE	##	##	##	##
SURFACE (MARITIME) SPECIFIC TYPE	##	##	##	##
SUBSURFACE (MARITIME) SPECIFIC TYPE	##	##	##	##
LAND (GROUND) SPECIFIC TYPE	##	##	##	##
LOCAL DISCRETE IDENTIFIER	##	##	##	##

MIL-STD-6016B

APPENDIX A

TABLE A.5-J14.0-3. Data Element Level Minimum Implementation by Fix or Bearing Descriptor Value (Sheet 3 of 6)

J14.0C6 DATA ELEMENT	FIX OR BEARING DESCRIPTOR VALUE			
	0	1	2	3
CALLSIGN, OBSERVED	TR	TR	XX	XX

MIL-STD-6016B

APPENDIX A

TABLE A.5-J14.0-3. Data Element Level Minimum Implementation by Fix or Bearing Descriptor Value (Sheet 4 of 6)

J14.0I DATA ELEMENT	FIX OR BEARING DESCRIPTOR VALUE			
	4	5	6	7
THREAT EVALUATION	##	##	XX	##
RESPONSE INDICATOR, EWAC	TR	TR	XX	TR
SPECIAL PROCESSING INDICATOR	TR	TR	XX	TR
AGILE EMITTER	##	##	XX	##
TRACK NUMBER, REFERENCE/INDEX NUMBER INDICATOR	TR	TR	XX	TR
TRACK NUMBER, REFERENCE	#57#	#57#	XX	#57#
INDEX NUMBER	#57#	#57#	XX	#57#
BEARING ORIGIN	TR	TR	XX	TR
SQUARE/CIRCLE SWITCH	NN	NN	XX	NN
SECOND	TR	TR	XX	TR
MINUTE	TR	TR	XX	TR
HOUR	TR	TR	XX	TR
REQUEST NUMBER	TR	TR	XX	TR
ENVIRONMENT/CATEGORY	TR	TR	XX	TR
LOCK-ON	##	##	XX	##
J14.0E0 DATA ELEMENT				
TRACK NUMBER, ORIGIN	TR	TR	XX	TR
FREQUENCY/FREQUENCY RANGE INDICATOR	TR	TR	XX	TR
FREQUENCY MULTIPLIER, 1	TR	TR	XX	TR
FREQUENCY, 1	TR	TR	XX	TR
FREQUENCY MULTIPLIER, 2	TR	TR	XX	TR
FREQUENCY, 2	TR	TR	XX	TR
J14.0C1 DATA ELEMENT				
PARAMETER SOURCE	##	##	XX	##
BEARING ACCURACY	TR	TR	XX	NN
BEARING	TR	TR	XX	N22N
SECTOR WIDTH	##	NN	XX	NN
ELEVATION ANGLE/ALTITUDE INDICATOR	#58#	#58#	XX	#58#
ELEVATION ANGLE	##	##	XX	NN
ALTITUDE, 25 FT	#23#	#23#	XX	N23N
COURSE	NN	NN	XX	NN
SPEED	NN	NN	XX	NN
J14.0C2 DATA ELEMENT				
LATITUDE, 0.0051 MINUTE	TR	TR	XX	TR
LONGITUDE, 0.0051 MINUTE	TR	TR	XX	TR
AREA MAJOR AXIS	NN	NN	XX	NN
AREA MINOR AXIS	NN	NN	XX	NN
AXIS ORIENTATION	NN	NN	XX	NN

MIL-STD-6016B

APPENDIX A

TABLE A.5-J14.0-3. Data Element Level Minimum Implementation by Fix or Bearing Descriptor Value (Sheet 5 of 6)

J14.0C3 DATA ELEMENT	FIX OR BEARING DESCRIPTOR VALUE			
	4	5	6	7
EMITTER FUNCTION	##	##	XX	##
MODE NUMBER	##	##	XX	##
MODULATION CODE	##	##	XX	##
MULTIPLE EVALUATION	#22#	#22#	XX	#22#
BROAD CLASSIFICATION	##	##	XX	##
AMPLIFYING CHARACTERISTICS	##	##	XX	##
EMITTER CONFIDENCE	##	##	XX	##
EMITTER NUMBER	##	##	XX	##
EMITTER NUMBER INDICATOR	#49#	#49#	XX	#49#
WARTIME RESERVE MODE INDICATOR	#49#	#49#	XX	#49#
J14.0C4 DATA ELEMENT				
PRF/PRI INDICATOR	#22#	XX	XX	#22#
PULSE REPETITION FREQUENCY	##	XX	XX	##
PULSE REPETITION INTERVAL	##	XX	XX	##
PULSE WIDTH	##	XX	XX	##
JITTER	##	XX	XX	##
SCAN TYPE	##	XX	XX	##
ANTENNA SCAN RATE/PERIOD INDICATOR	##	XX	XX	##
ANTENNA SCAN RATE	#22#	XX	XX	#22#
ANTENNA SCAN PERIOD	##	XX	XX	##
POLARIZATION	##	XX	XX	##
JAMMER RECEIVED SIGNAL LEVEL	##	XX	XX	##
J14.0C5 DATA ELEMENT				
NATIONALITY/ALLIANCE OF TRACK	##	##	XX	##
PLATFORM EVALUATION CONFIDENCE	##	##	XX	##
SPACE PLATFORM	##	##	XX	##
AIR PLATFORM	##	##	XX	##
SURFACE (MARITIME) PLATFORM	##	##	XX	##
SUBSURFACE (MARITIME) PLATFORM	##	##	XX	##
LAND (GROUND) PLATFORM	##	##	XX	##
SPACE PLATFORM ACTIVITY	##	##	XX	##
AIR PLATFORM ACTIVITY	##	##	XX	##
SURFACE (MARITIME) PLATFORM ACTIVITY	##	##	XX	##
SUBSURFACE (MARITIME) PLATFORM ACTIVITY	##	##	XX	##
LAND (GROUND) PLATFORM ACTIVITY	##	##	XX	##
SPACE SPECIFIC TYPE	##	##	XX	##
AIR SPECIFIC TYPE	##	##	XX	##
SURFACE (MARITIME) SPECIFIC TYPE	##	##	XX	##
SUBSURFACE (MARITIME) SPECIFIC TYPE	##	##	XX	##
LAND (GROUND) SPECIFIC TYPE	##	##	XX	##
LOCAL DISCRETE IDENTIFIER	##	##	XX	##

MIL-STD-6016B

APPENDIX A

TABLE A.5-J14.0-3. Data Element Level Minimum Implementation by Fix or Bearing Descriptor Value (Sheet 6 of 6)

J14.0C6 DATA ELEMENT	FIX OR BEARING DESCRIPTOR VALUE			
	4	5	6	7
CALLSIGN, OBSERVED	XX	TR	XX	XX

MIL-STD-6016B

APPENDIX A

THIS PAGE INTENTIONALLY LEFT BLANK

APPENDIX A

J14.2 Word, Data Element, and Data Item Minimum Implementation

To determine the words, data elements, and data items in the J14.2 message that are required for implementation, first, enter Table A.5-J14.2-1 from the left to determine the implementation requirements for each action value. Next, enter Table A.5-J14.2-2 from the left at an action value that will be implemented. Proceed across the row to determine the required word implementation for EW net participants. Then, enter Table A.5-J14.2-3 from the top at an action value that will be implemented. Proceed down the column to determine the required data element implementation for each word. At each level, the transmit and receive requirements are considered separately, with no interaction between them.

MIL-STD-6016B

APPENDIX A

TABLE A.5-J14.2-1. EW Action Value Minimum Implementation for the J14.2 Message

ELECTRONIC WARFARE ACTION VALUE	MIN IMP
0 - REQUEST PERIODIC REPORT	TR
1 - REQUEST AUTOMATIC EVALUATION	##
2 - REQUEST MANUAL EVALUATION	TR
3 - REQUEST UPDATE AND WATCH	TR
4 - REQUEST DIRECTED SEARCH	TR
5 - CANCEL REQUEST	TR
6 - CEASE REPORT	TR
7 - EMITTER EVALUATION	TR
8 - PARAMETER ASSOCIATION	##
9 - EMITTER ASSOCIATION	##
10 - DISASSOCIATION	##
11 - NO FIND	TR
12 - RESPONSE TO AN ELECTRONIC WARFARE REQUEST	TR
13 - EVALUATE TRACK	##
14 - EVALUATE SECTOR	##
15 - DIRECTION FINDER REQUEST	##
16 - PROTECT	T10R
17 - JAMMING REQUEST	##
18 - DISUSED	XX
19 - DEPLOY DECOYS	##
20 - PARAMETRIC DATA UPDATE REQUEST	##
21 - DISUSED	XX
22 - DISUSED	XX
23 - SET EMISSIONS CONTROL	T10R
24 - DISUSED	XX
25 - UNDEFINED	XX
26 - TRACK NUMBER, REFERENCE/ INDEX NUMBER CORRELATION	##
27 - UNDEFINED	XX
28 - DISUSED	XX
29 - DISUSED	XX
30 - GUARD	T10R
31 - TAB00	T10R
32-63 - UNDEFINED	XX

TABLE A.5-J14.2-2. Word Level Minimum Implementation by Electronic Warfare Action Value (Sheet 1 of 3)

ELECTRONIC WARFARE ACTION VALUE	J14.2 WORDS				
	J14.2I	J14.2E0	J14.2C1	J14.2C2	J14.2C3
0 - REQUEST PERIODIC REPORT	TR	TR	XX	XX	XX
1 - REQUEST AUTOMATIC EVALUATION	TR	XX	XX	XX	XX
2 - REQUEST MANUAL EVALUATION	TR	XX	XX	XX	XX
3 - REQUEST UPDATE AND WATCH	TR	XX	XX	XX	XX
4 - REQUEST DIRECTED SEARCH	TR	##	##	##	##
5 - CANCEL REQUEST	TR	TR	XX	XX	XX
6 - CEASE REPORT	TR	##	XX	XX	XX
7 - EMITTER EVALUATION	TR	TR	XX	XX	TR
8 - PARAMETER ASSOCIATION	TR	TR	XX	XX	XX
9 - EMITTER ASSOCIATION	TR	TR	XX	XX	XX
10 - DISASSOCIATION	TR	TR	XX	XX	XX
11 - NO FIND	TR	TR	XX	XX	XX
12 - RESPONSE TO AN ELECTRONIC WARFARE REQUEST	TR	TR	XX	XX	XX
13 - EVALUATE TRACK	TR	TR	TR	XX	##
14 - EVALUATE SECTOR	TR	TR	TR	##	##
15 - DIRECTION FINDER REQUEST	TR	TR	XX	XX	XX
16 - PROTECT	TR	##	XX	XX	XX
17 - JAMMING REQUEST	TR	##	##	##	##
18 - DISUSED	XX	XX	XX	XX	XX
19 - DEPLOY DECOYS	TR	TR	##	##	XX
20 - PARAMETRIC DATA UPDATE REQUEST	TR	XX	XX	XX	XX
21 - DISUSED	XX	XX	XX	XX	XX
22 - DISUSED	XX	XX	XX	XX	XX
23 - SET EMISSIONS CONTROL	TR	TR	XX	XX	XX
24 - DISUSED	XX	##	XX	XX	XX
25 - UNDEFINED	XX	XX	XX	XX	XX
26 - TRACK NUMBER, REFERENCE/ INDEX NUMBER CORRELATION	TR	TR	XX	XX	XX
27 - UNDEFINED	XX	XX	XX	XX	XX
28 - DISUSED	XX	XX	XX	XX	XX
29 - DISUSED	XX	XX	XX	XX	XX
30 - GUARD	TR	##	XX	XX	XX

TABLE A.5-J14.2-2. Word Level Minimum Implementation by Electronic Warfare Action Value (Sheet 2 of 3)

ELECTRONIC WARFARE ACTION VALUE	J14.2 WORDS				
	J14.2I	J14.2E0	J14.2C1	J14.2C2	J14.2C3
31 - TAB00	TR	##	XX	XX	XX
32-63 - UNDEFINED	XX	XX	XX	XX	XX

ELECTRONIC WARFARE ACTION VALUE	J14.2 WORDS				
	J14.2C4	J14.2C5	J14.2C6	J14.2C7	J14.2C8
0 - REQUEST PERIODIC REPORT	XX	XX	XX	XX	XX
1 - REQUEST AUTOMATIC EVALUATION	XX	XX	XX	XX	XX
2 - REQUEST MANUAL EVALUATION	XX	XX	XX	XX	XX
3 - REQUEST UPDATE AND WATCH	XX	XX	XX	XX	XX
4 - REQUEST DIRECTED SEARCH	##	##	XX	XX	##
5 - CANCEL REQUEST	XX	XX	XX	XX	XX
6 - CEASE REPORT	XX	XX	XX	XX	XX
7 - EMITTER EVALUATION	XX	XX	XX	XX	XX
8 - PARAMETER ASSOCIATION	XX	XX	XX	XX	XX
9 - EMITTER ASSOCIATION	XX	XX	XX	XX	XX
10 - DISASSOCIATION	XX	XX	XX	XX	XX
11 - NO FIND	XX	XX	XX	XX	XX
12 - RESPONSE TO AN ELECTRONIC WARFARE REQUEST	XX	XX	XX	XX	XX
13 - EVALUATE TRACK	##	XX	XX	XX	##
14 - EVALUATE SECTOR	##	XX	XX	XX	##
15 - DIRECTION FINDER REQUEST	##	XX	XX	XX	##
16 - PROTECT	TR	XX	##	XX	XX
17 - JAMMING REQUEST	##	##	XX	##	XX
18 - DISUSED	XX	XX	XX	XX	XX
19 - DEPLOY DECOYS	##	XX	XX	XX	XX
20 - PARAMETRIC DATA UPDATE REQUEST	XX	XX	XX	XX	XX
21 - DISUSED	XX	XX	XX	XX	XX
22 - DISUSED	XX	XX	XX	XX	XX
23 - SET EMISSIONS CONTROL	XX	XX	TR	XX	XX
24 - DISUSED	XX	XX	XX	XX	XX

TABLE A.5-J14.2-2. Word Level Minimum Implementation by Electronic Warfare Action Value (Sheet 3 of 3)

ELECTRONIC WARFARE ACTION VALUE	J14.2 WORDS				
	J14.2C4	J14.2C5	J14.2C6	J14.2C7	J14.2C8
25 - UNDEFINED	XX	XX	XX	XX	XX
26 - TRACK NUMBER, REFERENCE/ INDEX NUMBER CORRELATION	XX	XX	XX	XX	XX
27 - UNDEFINED	XX	XX	XX	XX	XX
28 - DISUSED	XX	XX	XX	XX	XX
29 - DISUSED	XX	XX	XX	XX	XX
30 - GUARD	TR	XX	##	XX	##
31 - TAB00	TR	XX	##	XX	##
32-63 - UNDEFINED	XX	XX	XX	XX	XX

TABLE A.5-J14.2-3. Data Element Minimum Implementation by Electronic Warfare Action Value (Sheet 1 of 20)

J14.2I DATA ELEMENT	ELECTRONIC WARFARE ACTION VALUE						
	0	1	2	3	4	5	6
TRACK NUMBER, ADDRESSEE	TR	TR	TR	TR	TR	TR	TR
TRACK NUMBER, REFERENCE	TR	TR	TR	TR	##	NN	TR
TASK PRIORITY	##	##	##	##	##	NN	NN
REQUEST NUMBER	TR	TR	TR	TR	TR	TR	TR
SECTOR/AREA/LOCATION INDICATOR	NN	NN	NN	NN	TR	NN	NN
RECEIPT/COMPLIANCE	TR	TR	TR	TR	TR	TR	TR
RECURRENCE RATE, RECEIPT/COMPLIANCE	TR	TR	TR	TR	TR	TR	TR
J14.2E0 DATA ELEMENT							
IMMEDIATE ACTION INDICATOR	XX	XX	XX	XX	##	NN	##
MINUTE	XX	XX	XX	XX	##	NN	##
HOURL	XX	XX	XX	XX	##	NN	##
SECOND	XX	XX	XX	XX	##	NN	##
TIME DURATION	XX	XX	XX	XX	##	NN	##
TRACK NUMBER, ASSOCIATED	XX	XX	XX	XX	NN	NN	NN
REFERENCE ELECTRONIC WARFARE ACTION VALUE	XX	XX	XX	XX	NN	TR	##
DECOY TYPE	XX	XX	XX	XX	NN	NN	NN
DECOY MISSION	XX	XX	XX	XX	NN	NN	NN
INDEX NUMBER	XX	XX	XX	XX	NN	NN	NN
PERIODICITY OF REPORT	XX	XX	XX	XX	NN	NN	NN
ELECTRONIC WARFARE COORDINATOR INDICATOR	XX	XX	XX	XX	N22N	N22N	N22N
SQUARE/CIRCLE SWITCH	XX	XX	XX	XX	TR	NN	NN
AUTOMATIC ELECTRONIC ATTACK NEGATION	XX	NN	XX	XX	NN	NN	NN
J14.2C1 DATA ELEMENT							
BEARING	XX	XX	XX	XX	TR	XX	XX
TRACK NUMBER, ORIGIN	XX	XX	XX	XX	TR	XX	XX
BEARING ORIGIN	XX	XX	XX	XX	N22N	XX	XX
SECTOR WIDTH	XX	XX	XX	XX	TR	XX	XX
ELEVATION ANGLE	XX	XX	XX	XX	##	XX	XX

TABLE A.5-J14.2-3. Data Element Minimum Implementation by Electronic Warfare Action Value (Sheet 2 of 20)

J14.2C2 DATA ELEMENT	ELECTRONIC WARFARE ACTION VALUE						
	0	1	2	3	4	5	6
LATITUDE, 0.0051 MINUTE	XX	XX	XX	XX	TR	XX	XX
LONGITUDE, 0.0051 MINUTE	XX	XX	XX	XX	TR	XX	XX
AREA MAJOR AXIS	XX	XX	XX	XX	TR	XX	XX
AREA MINOR AXIS	XX	XX	XX	XX	TR	XX	XX
AXIS ORIENTATION	XX	XX	XX	XX	TR	XX	XX
J14.2C3 DATA ELEMENT							
EMITTER FUNCTION	XX	XX	XX	XX	##	XX	XX
EMITTER NUMBER	XX	XX	XX	XX	TR	XX	XX
EMITTER NUMBER INDICATOR	XX	XX	XX	XX	TR	XX	XX
MODE NUMBER	XX	XX	XX	XX	TR	XX	XX
MODULATION CODE	XX	XX	XX	XX	##	XX	XX
WARTIME RESERVE MODE INDICATOR	XX	XX	XX	XX	TR	XX	XX
EMITTER CONFIDENCE	XX	XX	XX	XX	NN	XX	XX
J14.2C4 DATA ELEMENT							
FREQUENCY/FREQUENCY RANGE INDICATOR	XX	XX	XX	XX	TR	XX	XX
FREQUENCY MULTIPLIER, 1	XX	XX	XX	XX	TR	XX	XX
FREQUENCY, 1	XX	XX	XX	XX	TR	XX	XX
FREQUENCY MULTIPLIER, 2	XX	XX	XX	XX	T47R	XX	XX
FREQUENCY, 2	XX	XX	XX	XX	T47R	XX	XX
J14.2C5 DATA ELEMENT							
NATIONALITY/ALLIANCE OF TRACK	XX	XX	XX	XX	##	XX	XX
ENVIRONMENT/CATEGORY	XX	XX	XX	XX	TR	XX	XX
SPACE PLATFORM	XX	XX	XX	XX	##	XX	XX
AIR PLATFORM	XX	XX	XX	XX	##	XX	XX
SURFACE (MARITIME) PLATFORM	XX	XX	XX	XX	##	XX	XX
SUBSURFACE (MARITIME) PLATFORM	XX	XX	XX	XX	##	XX	XX
LAND (GROUND) PLATFORM	XX	XX	XX	XX	##	XX	XX

TABLE A.5-J14.2-3. Data Element Minimum Implementation by Electronic Warfare Action Value (Sheet 3 of 20)

J14.2C5(continued) DATA ELEMENT	ELECTRONIC WARFARE ACTION VALUE						
	0	1	2	3	4	5	6
SPACE PLATFORM ACTIVITY	XX	XX	XX	XX	##	XX	XX
AIR PLATFORM ACTIVITY	XX	XX	XX	XX	##	XX	XX
SURFACE (MARITIME) PLATFORM ACTIVITY	XX	XX	XX	XX	##	XX	XX
SUBSURFACE (MARITIME) PLATFORM ACTIVITY	XX	XX	XX	XX	##	XX	XX
LAND (GROUND) PLATFORM ACTIVITY	XX	XX	XX	XX	##	XX	XX
SPACE SPECIFIC TYPE	XX	XX	XX	XX	##	XX	XX
AIR SPECIFIC TYPE	XX	XX	XX	XX	##	XX	XX
SURFACE (MARITIME) SPECIFIC TYPE	XX	XX	XX	XX	##	XX	XX
SUBSURFACE (MARITIME) SPECIFIC TYPE	XX	XX	XX	XX	##	XX	XX
LAND (GROUND) SPECIFIC TYPE	XX	XX	XX	XX	##	XX	XX
LOCAL DISCRETE IDENTIFIER	XX	XX	XX	XX	##	XX	XX
J14.2C6 DATA ELEMENT							
PLAN SOURCE	XX	XX	XX	XX	XX	XX	XX
EMISSION CONTROL PLAN	XX	XX	XX	XX	XX	XX	XX
PLAN MODIFICATION	XX	XX	XX	XX	XX	XX	XX
TIME SHARING IMPLEMENTATION	XX	XX	XX	XX	XX	XX	XX
RADIATION STATUS INDICATOR	XX	XX	XX	XX	XX	XX	XX
RADIATION RESTRICTION	XX	XX	XX	XX	XX	XX	XX
CHANGE RADIATION FACTOR	XX	XX	XX	XX	XX	XX	XX
PLATFORM TYPE	XX	XX	XX	XX	XX	XX	XX
CIRCUIT	XX	XX	XX	XX	XX	XX	XX
LORAN FILTER SETTING	XX	XX	XX	XX	XX	XX	XX
J14.2C7 DATA ELEMENT							
CALLSIGN, OBSERVED	XX	XX	XX	XX	XX	XX	XX
J14.2C8 DATA ELEMENT							
PRF/PRI INDICATOR	XX	XX	XX	XX	TR	XX	XX
PULSE REPETITION FREQUENCY	XX	XX	XX	XX	TR	XX	XX

A-334

APPENDIX A

MIL-STD-6016B

TABLE A.5-J14.2-3. Data Element Minimum Implementation by Electronic Warfare Action Value (Sheet 4 of 20)

<u>J14.2C8(continued)</u> <u>DATA ELEMENT</u>	ELECTRONIC WARFARE ACTION VALUE						
	0	1	2	3	4	5	6
PULSE REPETITION INTERVAL	XX	XX	XX	XX	TR	XX	XX

TABLE A.5-J14.2-3. Data Element Minimum Implementation by Electronic Warfare Action Value (Sheet 5 of 20)

J14.2I DATA ELEMENT	ELECTRONIC WARFARE ACTION VALUE						
	7	8	9	10	11	12	13
TRACK NUMBER, ADDRESSEE	TR	TR	TR	TR	TR	TR	TR
TRACK NUMBER, REFERENCE	TR	TR	TR	TR	TR	TR	TR
TASK PRIORITY	##	NN	NN	NN	NN	NN	##
REQUEST NUMBER	NN	NN	NN	NN	TR	TR	TR
SECTOR/AREA/LOCATION INDICATOR	NN	NN	NN	NN	NN	NN	TR
RECEIPT/COMPLIANCE	TR	TR	TR	TR	TR	TR	TR
RECURRENCE RATE, RECEIPT/COMPLIANCE	NN	NN	NN	NN	NN	NN	TR
J14.2E0 DATA ELEMENT							
IMMEDIATE ACTION INDICATOR	NN	NN	NN	NN	NN	NN	##
MINUTE	NN	NN	NN	NN	NN	NN	##
HOURL	NN	NN	NN	NN	NN	NN	##
SECOND	NN	NN	NN	NN	NN	NN	##
TIME DURATION	NN	NN	NN	NN	NN	NN	TR
TRACK NUMBER, ASSOCIATED	NN	TR	TR	NN	NN	NN	NN
REFERENCE ELECTRONIC WARFARE ACTION VALUE	NN	NN	NN	NN	TR	TR	NN
DECOY TYPE	NN	NN	NN	NN	NN	NN	NN
DECOY MISSION	NN	NN	NN	NN	NN	NN	NN
INDEX NUMBER	NN	NN	NN	NN	NN	NN	##
PERIODICITY OF REPORT	NN	NN	NN	NN	NN	NN	NN
ELECTRONIC WARFARE COORDINATOR INDICATOR	TR	TR	TR	TR	N22N	N22N	N22N
SQUARE/CIRCLE SWITCH	NN	NN	NN	NN	NN	NN	NN
AUTOMATIC ELECTRONIC ATTACK NEGATION	NN	NN	NN	NN	NN	XX	NN
J14.2C1 DATA ELEMENT							
BEARING	XX	XX	XX	XX	XX	XX	N22N
TRACK NUMBER, ORIGIN	XX	XX	XX	XX	XX	XX	NN
BEARING ORIGIN	XX	XX	XX	XX	XX	XX	N22N
SECTOR WIDTH	XX	XX	XX	XX	XX	XX	TR
ELEVATION ANGLE	XX	XX	XX	XX	XX	XX	NN

TABLE A.5-J14.2-3. Data Element Minimum Implementation by Electronic Warfare Action Value (Sheet 6 of 20)

J14.2C2 DATA ELEMENT	ELECTRONIC WARFARE ACTION VALUE						
	7	8	9	10	11	12	13
LATITUDE, 0.0051 MINUTE	XX	XX	XX	XX	XX	XX	XX
LONGITUDE, 0.0051 MINUTE	XX	XX	XX	XX	XX	XX	XX
AREA MAJOR AXIS	XX	XX	XX	XX	XX	XX	XX
AREA MINOR AXIS	XX	XX	XX	XX	XX	XX	XX
AXIS ORIENTATION	XX	XX	XX	XX	XX	XX	XX
J14.2C3 DATA ELEMENT							
EMITTER FUNCTION	##	XX	XX	XX	XX	XX	##
EMITTER NUMBER	TR	XX	XX	XX	XX	XX	TR
EMITTER NUMBER INDICATOR	TR	XX	XX	XX	XX	XX	TR
MODE NUMBER	TR	XX	XX	XX	XX	XX	##
MODULATION CODE	##	XX	XX	XX	XX	XX	##
WARTIME RESERVE MODE INDICATOR	TR	XX	XX	XX	XX	XX	TR
EMITTER CONFIDENCE	TR	XX	XX	XX	XX	XX	NN
J14.2C4 DATA ELEMENT							
FREQUENCY/FREQUENCY RANGE INDICATOR	XX	XX	XX	XX	XX	XX	TR
FREQUENCY MULTIPLIER, 1	XX	XX	XX	XX	XX	XX	TR
FREQUENCY, 1	XX	XX	XX	XX	XX	XX	TR
FREQUENCY MULTIPLIER, 2	XX	XX	XX	XX	XX	XX	T47R
FREQUENCY, 2	XX	XX	XX	XX	XX	XX	T47R
J14.2C5 DATA ELEMENT							
NATIONALITY/ALLIANCE OF TRACK	XX	XX	XX	XX	XX	XX	XX
ENVIRONMENT/CATEGORY	XX	XX	XX	XX	XX	XX	XX
SPACE PLATFORM	XX	XX	XX	XX	XX	XX	XX
AIR PLATFORM	XX	XX	XX	XX	XX	XX	XX
SURFACE (MARITIME) PLATFORM	XX	XX	XX	XX	XX	XX	XX
SUBSURFACE (MARITIME) PLATFORM	XX	XX	XX	XX	XX	XX	XX
LAND (GROUND) PLATFORM	XX	XX	XX	XX	XX	XX	XX

TABLE A.5-J14.2-3. Data Element Minimum Implementation by Electronic Warfare Action Value (Sheet 7 of 20)

J14.2C5(continued) DATA ELEMENT	ELECTRONIC WARFARE ACTION VALUE						
	7	8	9	10	11	12	13
SPACE PLATFORM ACTIVITY	XX	XX	XX	XX	XX	XX	XX
AIR PLATFORM ACTIVITY	XX	XX	XX	XX	XX	XX	XX
SURFACE (MARITIME) PLATFORM ACTIVITY	XX	XX	XX	XX	XX	XX	XX
SUBSURFACE (MARITIME) PLATFORM ACTIVITY	XX	XX	XX	XX	XX	XX	XX
LAND (GROUND) PLATFORM ACTIVITY	XX	XX	XX	XX	XX	XX	XX
SPACE SPECIFIC TYPE	XX	XX	XX	XX	XX	XX	XX
AIR SPECIFIC TYPE	XX	XX	XX	XX	XX	XX	XX
SURFACE (MARITIME) SPECIFIC TYPE	XX	XX	XX	XX	XX	XX	XX
SUBSURFACE (MARITIME) SPECIFIC TYPE	XX	XX	XX	XX	XX	XX	XX
LAND (GROUND) SPECIFIC TYPE	XX	XX	XX	XX	XX	XX	XX
LOCAL DISCRETE IDENTIFIER	XX	XX	XX	XX	XX	XX	XX
J14.2C6 DATA ELEMENT							
PLAN SOURCE	XX	XX	XX	XX	XX	XX	XX
EMISSION CONTROL PLAN	XX	XX	XX	XX	XX	XX	XX
PLAN MODIFICATION	XX	XX	XX	XX	XX	XX	XX
TIME SHARING IMPLEMENTATION	XX	XX	XX	XX	XX	XX	XX
RADIATION STATUS INDICATOR	XX	XX	XX	XX	XX	XX	XX
RADIATION RESTRICTION	XX	XX	XX	XX	XX	XX	XX
CHANGE RADIATION FACTOR	XX	XX	XX	XX	XX	XX	XX
PLATFORM TYPE	XX	XX	XX	XX	XX	XX	XX
CIRCUIT	XX	XX	XX	XX	XX	XX	XX
LORAN FILTER SETTING	XX	XX	XX	XX	XX	XX	XX
J14.2C7 DATA ELEMENT							
CALLSIGN, OBSERVED	XX	XX	XX	XX	XX	XX	XX
J14.2C8 DATA ELEMENT							
PRF/PRI INDICATOR	XX	XX	XX	XX	XX	XX	TR
PULSE REPETITION FREQUENCY	XX	XX	XX	XX	XX	XX	TR

A-338

APPENDIX A

MIL-STD-6016B

TABLE A.5-J14.2-3. Data Element Minimum Implementation by Electronic Warfare Action Value (Sheet 8 of 20)

<u>J14.2C8(continued)</u> <u>DATA ELEMENT</u>	ELECTRONIC WARFARE ACTION VALUE						
	7	8	9	10	11	12	13
PULSE REPETITION INTERVAL	XX	XX	XX	XX	XX	XX	TR

TABLE A.5-J14.2-3. Data Element Minimum Implementation by Electronic Warfare Action Value (Sheet 9 of 20)

J14.2I DATA ELEMENT	ELECTRONIC WARFARE ACTION VALUE						
	14	15	16	17	18	19	20
TRACK NUMBER, ADDRESSEE	TR	TR	TR	TR	XX	TR	TR
TRACK NUMBER, REFERENCE	NN	TR	NN	TR	XX	##	NN
TASK PRIORITY	##	##	##	##	XX	##	##
REQUEST NUMBER	TR	TR	TR	TR	XX	TR	TR
SECTOR/AREA/LOCATION INDICATOR	TR	NN	NN	##	XX	##	NN
RECEIPT/COMPLIANCE	TR	TR	TR	TR	XX	TR	TR
RECURRENCE RATE, RECEIPT/COMPLIANCE	TR	TR	TR	TR	XX	TR	TR
J14.2E0 DATA ELEMENT							
IMMEDIATE ACTION INDICATOR	##	NN	TR	TR	XX	TR	XX
MINUTE	##	TR	TR	TR	XX	TR	XX
HOURL	##	TR	TR	TR	XX	TR	XX
SECOND	##	TR	TR	TR	XX	TR	XX
TIME DURATION	TR	NN	TR	TR	XX	TR	XX
TRACK NUMBER, ASSOCIATED	NN	NN	NN	NN	XX	NN	XX
REFERENCE ELECTRONIC WARFARE ACTION VALUE	NN	NN	NN	NN	XX	NN	XX
DECOY TYPE	NN	NN	NN	NN	XX	TR	XX
DECOY MISSION	NN	NN	NN	NN	XX	TR	XX
INDEX NUMBER	##	##	NN	NN	XX	NN	XX
PERIODICITY OF REPORT	##	NN	NN	NN	XX	NN	XX
ELECTRONIC WARFARE COORDINATOR INDICATOR	N22N	N22N	N22N	N22N	XX	N22N	XX
SQUARE/CIRCLE SWITCH	NN	NN	NN	##	XX	##	XX
AUTOMATIC ELECTRONIC ATTACK NEGATION	NN	NN	NN	TR	XX	##	XX
J14.2C1 DATA ELEMENT							
BEARING	TR	XX	XX	TR	XX	TR	XX
TRACK NUMBER, ORIGIN	NN	XX	XX	TR	XX	TR	XX
BEARING ORIGIN	N22N	XX	XX	TR	XX	TR	XX
SECTOR WIDTH	TR	XX	XX	##	XX	TR	XX
ELEVATION ANGLE	##	XX	XX	##	XX	##	XX

TABLE A.5-J14.2-3. Data Element Minimum Implementation by Electronic Warfare Action Value (Sheet 10 of 20)

J14.2C2 DATA ELEMENT	ELECTRONIC WARFARE ACTION VALUE						
	14	15	16	17	18	19	20
LATITUDE, 0.0051 MINUTE	TR	XX	XX	TR	XX	TR	XX
LONGITUDE, 0.0051 MINUTE	TR	XX	XX	TR	XX	TR	XX
AREA MAJOR AXIS	NN	XX	XX	##	XX	TR	XX
AREA MINOR AXIS	NN	XX	XX	##	XX	TR	XX
AXIS ORIENTATION	NN	XX	XX	##	XX	TR	XX
J14.2C3 DATA ELEMENT							
EMITTER FUNCTION	##	XX	XX	##	XX	XX	XX
EMITTER NUMBER	TR	XX	XX	TR	XX	XX	XX
EMITTER NUMBER INDICATOR	TR	XX	XX	TR	XX	XX	XX
MODE NUMBER	##	XX	XX	##	XX	XX	XX
MODULATION CODE	##	XX	XX	##	XX	XX	XX
WARTIME RESERVE MODE INDICATOR	TR	XX	XX	TR	XX	XX	XX
EMITTER CONFIDENCE	NN	XX	XX	NN	XX	XX	XX
J14.2C4 DATA ELEMENT							
FREQUENCY/FREQUENCY RANGE INDICATOR	TR	TR	TR	TR	XX	TR	XX
FREQUENCY MULTIPLIER, 1	TR	TR	TR	TR	XX	TR	XX
FREQUENCY, 1	TR	TR	TR	TR	XX	TR	XX
FREQUENCY MULTIPLIER, 2	T47R	T47R	T47R	T47R	XX	T47R	XX
FREQUENCY, 2	T47R	T47R	T47R	T47R	XX	T47R	XX
J14.2C5 DATA ELEMENT							
NATIONALITY/ALLIANCE OF TRACK	XX	XX	XX	##	XX	XX	XX
ENVIRONMENT/CATEGORY	XX	XX	XX	TR	XX	XX	XX
SPACE PLATFORM	XX	XX	XX	##	XX	XX	XX
AIR PLATFORM	XX	XX	XX	##	XX	XX	XX
SURFACE (MARITIME) PLATFORM	XX	XX	XX	##	XX	XX	XX
SUBSURFACE (MARITIME) PLATFORM	XX	XX	XX	##	XX	XX	XX
LAND (GROUND) PLATFORM	XX	XX	XX	##	XX	XX	XX

TABLE A.5-J14.2-3. Data Element Minimum Implementation by Electronic Warfare Action Value (Sheet 11 of 20)

J14.2C5(continued) DATA ELEMENT	ELECTRONIC WARFARE ACTION VALUE						
	14	15	16	17	18	19	20
SPACE PLATFORM ACTIVITY	XX	XX	XX	##	XX	XX	XX
AIR PLATFORM ACTIVITY	XX	XX	XX	##	XX	XX	XX
SURFACE (MARITIME) PLATFORM ACTIVITY	XX	XX	XX	##	XX	XX	XX
SUBSURFACE (MARITIME) PLATFORM ACTIVITY	XX	XX	XX	##	XX	XX	XX
LAND (GROUND) PLATFORM ACTIVITY	XX	XX	XX	##	XX	XX	XX
SPACE SPECIFIC TYPE	XX	XX	XX	##	XX	XX	XX
AIR SPECIFIC TYPE	XX	XX	XX	##	XX	XX	XX
SURFACE (MARITIME) SPECIFIC TYPE	XX	XX	XX	##	XX	XX	XX
SUBSURFACE (MARITIME) SPECIFIC TYPE	XX	XX	XX	##	XX	XX	XX
LAND (GROUND) SPECIFIC TYPE	XX	XX	XX	##	XX	XX	XX
LOCAL DISCRETE IDENTIFIER	XX	XX	XX	##	XX	XX	XX
J14.2C6 DATA ELEMENT							
PLAN SOURCE	XX	XX	XX	XX	XX	XX	XX
EMISSION CONTROL PLAN	XX	XX	XX	XX	XX	XX	XX
PLAN MODIFICATION	XX	XX	XX	XX	XX	XX	XX
TIME SHARING IMPLEMENTATION	XX	XX	XX	XX	XX	XX	XX
RADIATION STATUS INDICATOR	XX	XX	XX	XX	XX	XX	XX
RADIATION RESTRICTION	XX	XX	XX	XX	XX	XX	XX
CHANGE RADIATION FACTOR	XX	XX	XX	XX	XX	XX	XX
PLATFORM TYPE	XX	XX	XX	XX	XX	XX	XX
CIRCUIT	XX	XX	XX	XX	XX	XX	XX
LORAN FILTER SETTING	XX	XX	XX	XX	XX	XX	XX
J14.2C7 DATA ELEMENT							
CALLSIGN, OBSERVED	XX	XX	XX	TR	XX	XX	XX
J14.2C8 DATA ELEMENT							
PRF/PRI INDICATOR	TR	TR	XX	XX	XX	XX	XX
PULSE REPETITION FREQUENCY	TR	TR	XX	XX	XX	XX	XX

A-342

APPENDIX A

MIL-STD-6016B

TABLE A.5-J14.2-3. Data Element Minimum Implementation by Electronic Warfare Action Value (Sheet 12 of 20)

<u>J14.2C8(continued)</u> <u>DATA ELEMENT</u>	ELECTRONIC WARFARE ACTION VALUE						
	14	15	16	17	18	19	20
PULSE REPETITION INTERVAL	TR	TR	XX	XX	XX	XX	XX

TABLE A.5-J14.2-3. Data Element Minimum Implementation by Electronic Warfare Action Value (Sheet 13 of 20)

J14.2I DATA ELEMENT	ELECTRONIC WARFARE ACTION VALUE						
	21	22	23	24	25	26	27
TRACK NUMBER, ADDRESSEE	XX	XX	TR	XX	XX	TR	XX
TRACK NUMBER, REFERENCE	XX	XX	NN	XX	XX	TR	XX
TASK PRIORITY	XX	XX	##	XX	XX	##	XX
REQUEST NUMBER	XX	XX	TR	XX	XX	TR	XX
SECTOR/AREA/LOCATION INDICATOR	XX	XX	NN	XX	XX	NN	XX
RECEIPT/COMPLIANCE	XX	XX	TR	XX	XX	TR	XX
RECURRENCE RATE, RECEIPT/COMPLIANCE	XX	XX	TR	XX	XX	NN	XX
J14.2E0 DATA ELEMENT							
IMMEDIATE ACTION INDICATOR	XX	XX	TR	XX	XX	NN	XX
MINUTE	XX	XX	TR	XX	XX	NN	XX
HOUR	XX	XX	TR	XX	XX	NN	XX
SECOND	XX	XX	TR	XX	XX	NN	XX
TIME DURATION	XX	XX	TR	XX	XX	NN	XX
TRACK NUMBER, ASSOCIATED	XX	XX	NN	XX	XX	NN	XX
REFERENCE ELECTRONIC WARFARE ACTION VALUE	XX	XX	NN	XX	XX	NN	XX
DECOY TYPE	XX	XX	NN	XX	XX	NN	XX
DECOY MISSION	XX	XX	NN	XX	XX	NN	XX
INDEX NUMBER	XX	XX	NN	XX	XX	TR	XX
PERIODICITY OF REPORT	XX	XX	NN	XX	XX	NN	XX
ELECTRONIC WARFARE COORDINATOR INDICATOR	XX	XX	N22N	XX	XX	N22N	XX
SQUARE/CIRCLE SWITCH	XX	XX	NN	XX	XX	NN	XX
AUTOMATIC ELECTRONIC ATTACK NEGATION	XX	XX	NN	XX	XX	NN	XX
J14.2C1 DATA ELEMENT							
BEARING	XX	XX	XX	XX	XX	XX	XX
TRACK NUMBER, ORIGIN	XX	XX	XX	XX	XX	XX	XX
BEARING ORIGIN	XX	XX	XX	XX	XX	XX	XX
SECTOR WIDTH	XX	XX	XX	XX	XX	XX	XX
ELEVATION ANGLE	XX	XX	XX	XX	XX	XX	XX

A-344

APPENDIX A

MIL-STD-6016B

TABLE A.5-J14.2-3. Data Element Minimum Implementation by Electronic Warfare Action Value (Sheet 14 of 20)

J14.2C2 DATA ELEMENT	ELECTRONIC WARFARE ACTION VALUE						
	21	22	23	24	25	26	27
LATITUDE, 0.0051 MINUTE	XX	XX	XX	XX	XX	XX	XX
LONGITUDE, 0.0051 MINUTE	XX	XX	XX	XX	XX	XX	XX
AREA MAJOR AXIS	XX	XX	XX	XX	XX	XX	XX
AREA MINOR AXIS	XX	XX	XX	XX	XX	XX	XX
AXIS ORIENTATION	XX	XX	XX	XX	XX	XX	XX
J14.2C3 DATA ELEMENT							
EMITTER FUNCTION	XX	XX	XX	XX	XX	XX	XX
EMITTER NUMBER	XX	XX	XX	XX	XX	XX	XX
EMITTER NUMBER INDICATOR	XX	XX	XX	XX	XX	XX	XX
MODE NUMBER	XX	XX	XX	XX	XX	XX	XX
MODULATION CODE	XX	XX	XX	XX	XX	XX	XX
WARTIME RESERVE MODE INDICATOR	XX	XX	XX	XX	XX	XX	XX
EMITTER CONFIDENCE	XX	XX	XX	XX	XX	XX	XX
J14.2C4 DATA ELEMENT							
FREQUENCY/FREQUENCY RANGE INDICATOR	XX	XX	XX	XX	XX	XX	XX
FREQUENCY MULTIPLIER, 1	XX	XX	XX	XX	XX	XX	XX
FREQUENCY, 1	XX	XX	XX	XX	XX	XX	XX
FREQUENCY MULTIPLIER, 2	XX	XX	XX	XX	XX	XX	XX
FREQUENCY, 2	XX	XX	XX	XX	XX	XX	XX
J14.2C5 DATA ELEMENT							
NATIONALITY/ALLIANCE OF TRACK	XX	XX	XX	XX	XX	XX	XX
ENVIRONMENT/CATEGORY	XX	XX	XX	XX	XX	XX	XX
SPACE PLATFORM	XX	XX	XX	XX	XX	XX	XX
AIR PLATFORM	XX	XX	XX	XX	XX	XX	XX
SURFACE (MARITIME) PLATFORM	XX	XX	XX	XX	XX	XX	XX
SUBSURFACE (MARITIME) PLATFORM	XX	XX	XX	XX	XX	XX	XX
LAND (GROUND) PLATFORM	XX	XX	XX	XX	XX	XX	XX

TABLE A.5-J14.2-3. Data Element Minimum Implementation by Electronic Warfare Action Value (Sheet 15 of 20)

J14.2C5(continued) DATA ELEMENT	ELECTRONIC WARFARE ACTION VALUE						
	21	22	23	24	25	26	27
SPACE PLATFORM ACTIVITY	XX	XX	XX	XX	XX	XX	XX
AIR PLATFORM ACTIVITY	XX	XX	XX	XX	XX	XX	XX
SURFACE (MARITIME) PLATFORM ACTIVITY	XX	XX	XX	XX	XX	XX	XX
SUBSURFACE (MARITIME) PLATFORM ACTIVITY	XX	XX	XX	XX	XX	XX	XX
LAND (GROUND) PLATFORM ACTIVITY	XX	XX	XX	XX	XX	XX	XX
SPACE SPECIFIC TYPE	XX	XX	XX	XX	XX	XX	XX
AIR SPECIFIC TYPE	XX	XX	XX	XX	XX	XX	XX
SURFACE (MARITIME) SPECIFIC TYPE	XX	XX	XX	XX	XX	XX	XX
SUBSURFACE (MARITIME) SPECIFIC TYPE	XX	XX	XX	XX	XX	XX	XX
LAND (GROUND) SPECIFIC TYPE	XX	XX	XX	XX	XX	XX	XX
LOCAL DISCRETE IDENTIFIER	XX	XX	XX	XX	XX	XX	XX
J14.2C6 DATA ELEMENT							
PLAN SOURCE	XX	XX	TR	XX	XX	XX	XX
EMISSION CONTROL PLAN	XX	XX	TR	XX	XX	XX	XX
PLAN MODIFICATION	XX	XX	TR	XX	XX	XX	XX
TIME SHARING IMPLEMENTATION	XX	XX	TR	XX	XX	XX	XX
RADIATION STATUS INDICATOR	XX	XX	TR	XX	XX	XX	XX
RADIATION RESTRICTION	XX	XX	TR	XX	XX	XX	XX
CHANGE RADIATION FACTOR	XX	XX	TR	XX	XX	XX	XX
PLATFORM TYPE	XX	XX	TR	XX	XX	XX	XX
CIRCUIT	XX	XX	TR	XX	XX	XX	XX
LORAN FILTER SETTING	XX	XX	TR	XX	XX	XX	XX
J14.2C7 DATA ELEMENT							
CALLSIGN, OBSERVED	XX	XX	XX	XX	XX	XX	XX
J14.2C8 DATA ELEMENT							
PRF/PRI INDICATOR	XX	XX	XX	XX	XX	XX	XX
PULSE REPETITION FREQUENCY	XX	XX	XX	XX	XX	XX	XX

A-346

APPENDIX A

MIL-STD-6016B

TABLE A.5-J14.2-3. Data Element Minimum Implementation by Electronic Warfare Action Value (Sheet 16 of 20)

J14.2C8(continued) DATA ELEMENT	ELECTRONIC WARFARE ACTION VALUE						
	21	22	23	24	25	26	27
PULSE REPETITION INTERVAL	XX	XX	XX	XX	XX	XX	XX

TABLE A.5-J14.2-3. Data Element Minimum Implementation by Electronic Warfare Action Value (Sheet 17 of 20)

J14.2I DATA ELEMENT	ELECTRONIC WARFARE ACTION VALUE				
	28	29	30	31	32-63
TRACK NUMBER, ADDRESSEE	XX	XX	TR	TR	XX
TRACK NUMBER, REFERENCE	XX	XX	TR	TR	XX
TASK PRIORITY	XX	XX	##	##	XX
REQUEST NUMBER	XX	XX	TR	TR	XX
SECTOR/AREA/LOCATION INDICATOR	XX	XX	NN	NN	XX
RECEIPT/COMPLIANCE	XX	XX	TR	TR	XX
RECURRENCE RATE, RECEIPT/COMPLIANCE	XX	XX	TR	TR	XX
J14.2E0 DATA ELEMENT					
IMMEDIATE ACTION INDICATOR	XX	XX	TR	TR	XX
MINUTE	XX	XX	TR	TR	XX
HOURL	XX	XX	TR	TR	XX
SECOND	XX	XX	TR	TR	XX
TIME DURATION	XX	XX	TR	TR	XX
TRACK NUMBER, ASSOCIATED	XX	XX	NN	NN	XX
REFERENCE ELECTRONIC WARFARE ACTION VALUE	XX	XX	NN	NN	XX
DECOY TYPE	XX	XX	NN	NN	XX
DECOY MISSION	XX	XX	NN	NN	XX
INDEX NUMBER	XX	XX	NN	NN	XX
PERIODICITY OF REPORT	XX	XX	NN	NN	XX
ELECTRONIC WARFARE COORDINATOR INDICATOR	XX	XX	N22N	N22N	XX
SQUARE/CIRCLE SWITCH	XX	XX	NN	NN	XX
AUTOMATIC ELECTRONIC ATTACK NEGATION	XX	XX	NN	NN	XX
J14.2C1 DATA ELEMENT					
BEARING	XX	XX	XX	XX	XX
TRACK NUMBER, ORIGIN	XX	XX	XX	XX	XX
BEARING ORIGIN	XX	XX	XX	XX	XX
SECTOR WIDTH	XX	XX	XX	XX	XX
ELEVATION ANGLE	XX	XX	XX	XX	XX

TABLE A.5-J14.2-3. Data Element Minimum Implementation by Electronic Warfare Action Value (Sheet 18 of 20)

J14.2C2 DATA ELEMENT	ELECTRONIC WARFARE ACTION VALUE				
	28	29	30	31	32-63
LATITUDE, 0.0051 MINUTE	XX	XX	XX	XX	XX
LONGITUDE, 0.0051 MINUTE	XX	XX	XX	XX	XX
AREA MAJOR AXIS	XX	XX	XX	XX	XX
AREA MINOR AXIS	XX	XX	XX	XX	XX
AXIS ORIENTATION	XX	XX	XX	XX	XX
J14.2C3 DATA ELEMENT					
EMITTER FUNCTION	XX	XX	XX	XX	XX
EMITTER NUMBER	XX	XX	XX	XX	XX
EMITTER NUMBER INDICATOR	XX	XX	XX	XX	XX
MODE NUMBER	XX	XX	XX	XX	XX
MODULATION CODE	XX	XX	XX	XX	XX
WARTIME RESERVE MODE INDICATOR	XX	XX	XX	XX	XX
EMITTER CONFIDENCE	XX	XX	XX	XX	XX
J14.2C4 DATA ELEMENT					
FREQUENCY/FREQUENCY RANGE INDICATOR	XX	XX	TR	TR	XX
FREQUENCY MULTIPLIER, 1	XX	XX	TR	TR	XX
FREQUENCY, 1	XX	XX	TR	TR	XX
FREQUENCY MULTIPLIER, 2	XX	XX	T47R	T47R	XX
FREQUENCY, 2	XX	XX	T47R	T47R	XX
J14.2C5 DATA ELEMENT					
NATIONALITY/ALLIANCE OF TRACK	XX	XX	XX	XX	XX
ENVIRONMENT/CATEGORY	XX	XX	XX	XX	XX
SPACE PLATFORM	XX	XX	XX	XX	XX
AIR PLATFORM	XX	XX	XX	XX	XX
SURFACE (MARITIME) PLATFORM	XX	XX	XX	XX	XX
SUBSURFACE (MARITIME) PLATFORM	XX	XX	XX	XX	XX
LAND (GROUND) PLATFORM	XX	XX	XX	XX	XX

TABLE A.5-J14.2-3. Data Element Minimum Implementation by Electronic Warfare Action Value (Sheet 19 of 20)

J14.2C5(continued) DATA ELEMENT	ELECTRONIC WARFARE ACTION VALUE				
	28	29	30	31	32-63
SPACE PLATFORM ACTIVITY	XX	XX	XX	XX	XX
AIR PLATFORM ACTIVITY	XX	XX	XX	XX	XX
SURFACE (MARITIME) PLATFORM ACTIVITY	XX	XX	XX	XX	XX
SUBSURFACE (MARITIME) PLATFORM ACTIVITY	XX	XX	XX	XX	XX
LAND (GROUND) PLATFORM ACTIVITY	XX	XX	XX	XX	XX
SPACE SPECIFIC TYPE	XX	XX	XX	XX	XX
AIR SPECIFIC TYPE	XX	XX	XX	XX	XX
SURFACE (MARITIME) SPECIFIC TYPE	XX	XX	XX	XX	XX
SUBSURFACE (MARITIME) SPECIFIC TYPE	XX	XX	XX	XX	XX
LAND (GROUND) SPECIFIC TYPE	XX	XX	XX	XX	XX
LOCAL DISCRETE IDENTIFIER	XX	XX	XX	XX	XX
J14.2C6 DATA ELEMENT					
PLAN SOURCE	XX	XX	TR	TR	XX
EMISSION CONTROL PLAN	XX	XX	TR	TR	XX
PLAN MODIFICATION	XX	XX	TR	TR	XX
TIME SHARING IMPLEMENTATION	XX	XX	##	##	XX
RADIATION STATUS INDICATOR	XX	XX	##	##	XX
RADIATION RESTRICTION	XX	XX	##	##	XX
CHANGE RADIATION FACTOR	XX	XX	##	##	XX
PLATFORM TYPE	XX	XX	##	##	XX
CIRCUIT	XX	XX	##	##	XX
LORAN FILTER SETTING	XX	XX	##	##	XX
J14.2C7 DATA ELEMENT					
CALLSIGN, OBSERVED	XX	XX	XX	XX	XX
J14.2C8 DATA ELEMENT					
PRF/PRI INDICATOR	XX	XX	XX	XX	XX
PULSE REPETITION FREQUENCY	XX	XX	XX	XX	XX

TABLE A.5-J14.2-3. Data Element Minimum Implementation by Electronic Warfare Action Value (Sheet 20 of 20)

<u>J14.2C8(continued)</u> <u>DATA ELEMENT</u>	ELECTRONIC WARFARE ACTION VALUE				
	28	29	30	31	32-63
PULSE REPETITION INTERVAL	XX	XX	XX	XX	XX

MIL-STD-6016B

APPENDIX A

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

APPENDIX A

TABLE A.5-J15.0. Word, Data Element, and Data Item Minimum Implementation

WORD LEVEL

<u>WORD</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
J15.0I	TR		TR
J15.0E0	TR		#R
J15.0C1	TR		#R

DATA ELEMENT LEVEL

<u>J15.0I</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
TRACK NUMBER, ADDRESSEE	TR		TR
THREAT POSTURE	TR		TR
TRACK NUMBER, THREAT	TR		TR
STRENGTH	##		##
EXERCISE INDICATOR	TR		TR
THREAT TYPE	TR		TR
THREAT WEAPON	##		##

<u>J15.0E0</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
LATITUDE, 0.0051 MINUTE	TR		XR
LONGITUDE, 0.0051 MINUTE	TR		XR
TRACK NUMBER, TARGETED	TR		XR

<u>J15.0C1</u> <u>DATA ELEMENT</u>	<u>C² JU</u>	<u>MIN IMP</u>	<u>NONC² JU</u>
COURSE	TR		TR
SPEED	TR		TR
ALTITUDE, 25 FT	TR		TR
THREAT FUEL	##		##
SPACE SPECIFIC TYPE	##		##
AIR SPECIFIC TYPE	##		##
SURFACE (MARITIME) SPECIFIC TYPE	##		##
SUBSURFACE (MARITIME) SPECIFIC TYPE	##		##
LAND (GROUND) SPECIFIC TYPE	##		##
ENVIRONMENT/CATEGORY	TR		TR

MIL-STD-6016B

APPENDIX A

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

APPENDIX A

TABLE A.5-J17.0. Word, Data Element , and Data Item Minimum Implementation

WORD LEVEL

<u>WORD</u>	<u>MIN IMP</u>
J17.0I	TR
J17.0E0	TR

DATA ELEMENT LEVEL

<u>J17.0I</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
VISIBILITY	##
CLOUD COVER, 1	##
CLOUD HEIGHT, 1	##
TRACK NUMBER, OBJECTIVE	TR
ORIGIN OF INDEX NUMBER	##
INDEX NUMBER	##

<u>J17.0E0</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
QNH	##
WIND SPEED	##
WIND DIRECTION	##
MINUTE	TR
HOURL	TR

APPENDIX A

Appendix A does not include Minimum Implementation for National Messages.

MIL-STD-6016B

APPENDIX A

TABLE A.5-J28.20. Word, Data Element, and Data Item Minimum Implementation

WORD LEVEL

<u>WORD</u>	<u>MIN IMP</u>
J28.20I	TRTR
J28.20E0	TRTR

DATA ELEMENT LEVEL

<u>J28.20I</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
AF PROPRIETARY FORMAT	TR
MESSAGE NUMBER	TR
MESSAGE COUNT	TR
TRACK NUMBER, ADDRESSEE	TR
CHARACTER #1	TR
CHARACTER #2	TR

<u>J28.20E0</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
CHARACTER #3	TR
CHARACTER #4	TR
CHARACTER #5	TR
CHARACTER #6	TR
CHARACTER #7	TR
CHARACTER #8	TR
CHARACTER #9	TR
CHARACTER #10	TR
CHARACTER #11	TR
CHARACTER #12	TR
CHARACTER #13	TR

MIL-STD-6016B

APPENDIX A

THIS PAGE INTENTIONALLY LEFT BLANK

APPENDIX A

J31.0 word, Data element, and Data Item Minimum Implementation

To determine the words, data elements, and data items in the message that are required for implementation, first, enter Table A.5-J31.0-1 from the left to determine the implementation requirements for each action code. Next, enter Table A.5-J31.0-2 from the left at an action code that will be implemented. Proceed across the row to determine the required word implementation. Then, enter Table A.5-J31.0-3 from the top at an action code that will be implemented. Proceed down the column to determine the required data element implementation for each word. At each level, the transmit and receive requirements are considered separately, with no interaction between them.

MIL-STD-6016B

APPENDIX A

TABLE A.5-J31.0-1. Action Code, Over the Air Rekeying Minimum Implementation for the J31.0 Message

ACTION CODE, OVER-THE-AIR REKEYING VALUE	MIN IMP	
	Over-the-Air Rekeying Facility	Remote JU
0 - CHANGE CRYPTOVARIABLE IMMEDIATELY	XX	XX
1 - CHANGE CRYPTOVARIABLE AT TIME SPECIFIED	TX	XR
2 - CRYPTOVARIABLE STATUS REPORT	XR	TX
3 - DIRECT CRYPTOVARIABLE REQUEST	XR	#X
4 - INDIRECT CRYPTOVARIABLE REQUEST	XR	#X
5 - CRYPTOVARIABLE STATUS REQUEST	TX	XR
6 - PACKED OTAR	TX	XR
7 - PACKED OTMR	TX	XX
8-13 - UNDEFINED	XX	XX
14-15 - RESERVED FOR CLASS 1	XX	XX

TABLE A.5-J31.0-2. Word Level Minimum Implementation by Action Code, Over-the-Air Rekeying Value

ACTION CODE, OVER-THE-AIR REKEYING VALUE	J31.0 WORDS							
	J31.0I		J31.0E0		J31.0C1		J31.0C2	
	OVER-THE-AIR REKEYING FACILITY	REMOTE JU	OVER-THE-AIR REKEYING FACILITY	REMOTE JU	OVER-THE-AIR REKEYING FACILITY	REMOTE JU	OVER-THE-AIR REKEYING FACILITY	REMOTE JU
0 - CHANGE CRYPTOVARIABLE IMMEDIATELY								
1 - CHANGE CRYPTOVARIABLE AT TIME SPECIFIED	TX	XR	XX	XX	XX	XX	TX	XR
2 - CRYPTOVARIABLE STATUS REPORT	XR	TX	XR	TX	XR	TX	XX	XX
3 - DIRECT CRYPTOVARIABLE REQUEST	XR	TX	XR	TX	XR	TX	XX	XX
4 - INDIRECT CRYPTOVARIABLE REQUEST	XR	TX	XR	TX	XR	TX	XX	XX
5 - CRYPTOVARIABLE STATUS REQUEST	TX	XR	XX	XX	XX	XX	XX	XX
6 - PACKED OTAR	TX	XR	XX	XX	XX	XX	TX	XR
7 - PACKED OTMR	TX	XX	XX	XX	XX	XX	TX	XX
8-13 - UNDEFINED	XX	XX	XX	XX	XX	XX	XX	XX
14-15 - RESERVED FOR CLASS 1	XX	XX	XX	XX	XX	XX	XX	XX

TABLE A.5-J31.0-3. Data Element Level Minimum Implmentation by Action Code, Over-the-Air Rekeying Value
(Sheet 1 of 5)

J31.0I DATA ELEMENT	ACTION CODE, OVER-THE-AIR REKEYING VALUE									
	0		1		2		3		4	
	OVER-THE-AIR REKEYING FACILITY	REMOTE JU	OVER-THE-AIR REKEYING FACILITY	REMOTE JU	OVER-THE-AIR REKEYING FACILITY	REMOTE JU	OVER-THE-AIR REKEYING FACILITY	REMOTE JU	OVER-THE-AIR REKEYING FACILITY	REMOTE JU
TRACK NUMBER, ADDRESSEE	XX	XX	TX	XR	XR	TX	XR	TX	XR	TX
EXECUTE MINUTES	XX	XX	TX	XR	XN	NX	XN	NX	XN	NX
EXECUTE HOURS	XX	XX	TX	XR	XN	NX	XN	NX	XN	NX
RECEIPT/COMPLIANCE	XX	XX	TX	XR	XR	TX	XR	TX	XR	TX
RECURRENCE RATE, RECEIPT/ COMPLIANCE	XX	XX	TX	XR	XR	TX	XR	TX	XR	TX
J31.0E0 DATA ELEMENT										
CRYPTOPERIOD DESIGNATOR, LOCATION 0	XX	XX	XX	XX	XR	TX	XR	TX	XR	TX
CRYPTOVARIABLE LOGICAL LABEL LOCATION, 0	XX	XX	XX	XX	XR	TX	XR	TX	XR	TX
CRYPTOPERIOD DESIGNATOR, LOCATION 1	XX	XX	XX	XX	XR	TX	XR	TX	XR	TX
CRYPTOVARIABLE LOGICAL LABEL LOCATION, 1	XX	XX	XX	XX	XR	TX	XR	TX	XR	TX
CRYPTOPERIOD DESIGNATOR, LOCATION 2	XX	XX	XX	XX	XR	TX	XR	TX	XR	TX
CRYPTOVARIABLE LOGICAL LABEL LOCATION, 2	XX	XX	XX	XX	XR	TX	XR	TX	XR	TX
CRYPTOPERIOD DESIGNATOR, LOCATION 3	XX	XX	XX	XX	XR	TX	XR	TX	XR	TX
CRYPTOVARIABLE LOGICAL LABEL LOCATION, 3	XX	XX	XX	XX	XR	TX	XR	TX	XR	TX
CRYPTOPERIOD DESIGNATOR, LOCATION 4	XX	XX	XX	XX	XR	TX	XR	TX	XR	TX
CRYPTOVARIABLE LOGICAL LABEL LOCATION, 4	XX	XX	XX	XX	XR	TX	XR	TX	XR	TX
CRYPTOPERIOD DESIGNATOR, LOCATION 5	XX	XX	XX	XX	XR	TX	XR	TX	XR	TX
CRYPTOVARIABLE LOGICAL LABEL LOCATION, 5	XX	XX	XX	XX	XR	TX	XR	TX	XR	TX
CRYPTOPERIOD DESIGNATOR, LOCATION 6	XX	XX	XX	XX	XR	TX	XR	TX	XR	TX

TABLE A.5-J31.0-3. Data Element Level Minimum Implmentation by Action Code, Over-the-Air Rekeying Value
(Sheet 2 of 5)

J31.0E0(continued) DATA ELEMENT	ACTION CODE, OVER-THE-AIR REKEYING VALUE									
	0		1		2		3		4	
	OVER-THE-AIR REKEYING FACILITY	REMOTE JU	OVER-THE-AIR REKEYING FACILITY	REMOTE JU	OVER-THE-AIR REKEYING FACILITY	REMOTE JU	OVER-THE-AIR REKEYING FACILITY	REMOTE JU	OVER-THE-AIR REKEYING FACILITY	REMOTE JU
CRYPTOVARIABLE LOGICAL LABEL LOCATION, 6	XX	XX	XX	XX	XR	TX	XR	TX	XR	TX
CRYPTOPERIOD DESIGNATOR, LOCATION 7	XX	XX	XX	XX	XR	TX	XR	TX	XR	TX
CRYPTOVARIABLE LOGICAL LABEL LOCATION, 7	XX	XX	XX	XX	XR	TX	XR	TX	XR	TX
J31.0C1 DATA ELEMENT										
TRACK NUMBER, SPECIFIED	XX	XX	XX	XX	XN	NX	XN	NX	XR	TX
CRYPTOSTATUS INFORMATION CODE	XX	XX	XX	XX	XR	TX	XR	TX	XR	TX
SECURE DATA UNIT IDENTIFICATION NUMBER	XX	XX	XX	XX	XR	TX	XR	TX	XR	TX
UNIQUE VARIABLE UPDATE NUMBER	XX	XX	XX	XX	XR	TX	XR	TX	XR	TX
CRYPTOPERIOD DESIGNATOR, CURRENT	XX	XX	XX	XX	XR	TX	XR	TX	XR	TX
CRYPTOVARIABLE LOGICAL LABEL, REQUEST	XX	XX	XX	XX	XN	NX	XR	TX	XR	TX
MEMORY LOCATION, REQUEST	XX	XX	XX	XX	XN	NX	XR	TX	XR	TX
CRYPTOPERIOD INDICATOR, REQUEST	XX	XX	XX	XX	XN	NX	XR	TX	XR	TX
J31.0C2 DATA ELEMENT										
MEMORY LOCATION, REKEY	XX	XX	TX	XR	XX	XX	XX	XX	XX	XX
CRYPTOVARIABLE LOGICAL LABEL, REKEY	XX	XX	TX	XR	XX	XX	XX	XX	XX	XX
CRYPTOPERIOD DESIGNATOR, REKEY	XX	XX	TX	XR	XX	XX	XX	XX	XX	XX
CRYPTOVARIABLE SYNCHRONIZATION BITS	XX	XX	TX	XR	XX	XX	XX	XX	XX	XX
CRYPTOVARIABLE LOGICAL LABEL SYNCHRONIZATION	XX	XX	TX	XR	XX	XX	XX	XX	XX	XX

TABLE A.5-J31.0-3. Data Element Level Minimum Implmentation by Action Code, Over-the-Air Rekeying Value
(Sheet 3 of 5)

J31.0C2(continued) DATA ELEMENT	ACTION CODE, OVER-THE-AIR REKEYING VALUE									
	0		1		2		3		4	
	OVER-THE-AIR REKEYING FACILITY	REMOTE JU	OVER-THE-AIR REKEYING FACILITY	REMOTE JU	OVER-THE-AIR REKEYING FACILITY	REMOTE JU	OVER-THE-AIR REKEYING FACILITY	REMOTE JU	OVER-THE-AIR REKEYING FACILITY	REMOTE JU
CRYPTOPERIOD DESIGNATOR, SYNCHRONIZATION	XX	XX	TX	XR	XX	XX	XX	XX	XX	XX

TABLE A.5-J31.0-3. Data Element Level Minimum Implmentation by Action Code, Over-the-Air Rekeying Value
(Sheet 4 of 5)

J31.0I DATA ELEMENT	ACTION CODE, OVER-THE-AIR REKEYING VALUE									
	5		6		7		8-13		14-15	
	OVER-THE-AIR REKEYING FACILITY	REMOTE JU	OVER-THE-AIR REKEYING FACILITY	REMOTE JU	OVER-THE-AIR REKEYING FACILITY	REMOTE JU	OVER-THE-AIR REKEYING FACILITY	REMOTE JU	OVER-THE-AIR REKEYING FACILITY	REMOTE JU
TRACK NUMBER, ADDRESSEE	TX	XX	TX	XR	TX	XX	XX	XX	XX	XX
EXECUTE MINUTES	NX	XN	TX	XR	TX	XX	XX	XX	XX	XX
EXECUTE HOURS	NX	XN	TX	XR	TX	XX	XX	XX	XX	XX
RECEIPT/COMPLIANCE	TX	XR	TX	XR	T22X	XX	XX	XX	XX	XX
RECURRENCE RATE, RECEIPT/ COMPLIANCE	TX	XR	TX	XR	NX	XX	XX	XX	XX	XX
J31.0E0 DATA ELEMENT										
CRYPTOPERIOD DESIGNATOR, LOCATION 0	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
CRYPTOVARIABLE LOGICAL LABEL LOCATION, 0	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
CRYPTOPERIOD DESIGNATOR, LOCATION 1	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
CRYPTOVARIABLE LOGICAL LABEL LOCATION, 1	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
CRYPTOPERIOD DESIGNATOR, LOCATION 2	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
CRYPTOVARIABLE LOGICAL LABEL LOCATION, 2	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
CRYPTOPERIOD DESIGNATOR, LOCATION 3	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
CRYPTOVARIABLE LOGICAL LABEL LOCATION, 3	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
CRYPTOPERIOD DESIGNATOR, LOCATION 4	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
CRYPTOVARIABLE LOGICAL LABEL LOCATION, 4	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
CRYPTOPERIOD DESIGNATOR, LOCATION 5	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
CRYPTOVARIABLE LOGICAL LABEL LOCATION, 5	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
CRYPTOPERIOD DESIGNATOR, LOCATION 6	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
CRYPTOVARIABLE LOGICAL LABEL LOCATION, 6	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX

TABLE A.5-J31.0-3. Data Element Level Minimum Implmentation by Action Code, Over-the-Air Rekeying Value
(Sheet 5 of 5)

J31.0E0(continued) DATA ELEMENT	ACTION CODE, OVER-THE-AIR REKEYING VALUE									
	5		6		7		8-13		14-15	
	OVER-THE-AIR REKEYING FACILITY	REMOTE JU	OVER-THE-AIR REKEYING FACILITY	REMOTE JU	OVER-THE-AIR REKEYING FACILITY	REMOTE JU	OVER-THE-AIR REKEYING FACILITY	REMOTE JU	OVER-THE-AIR REKEYING FACILITY	REMOTE JU
CRYPTOPERIOD DESIGNATOR, LOCATION 7	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
CRYPTOVARIABLE LOGICAL LABEL LOCATION, 7	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
J31.0C1 DATA ELEMENT										
TRACK NUMBER, SPECIFIED	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
CRYPTOSTATUS INFORMATION CODE	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
SECURE DATA UNIT IDENTIFICATION NUMBER	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
UNIQUE VARIABLE UPDATE NUMBER	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
CRYPTOPERIOD DESIGNATOR, CURRENT	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
CRYPTOVARIABLE LOGICAL LABEL, REQUEST	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
MEMORY LOCATION, REQUEST	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
CRYPTOPERIOD INDICATOR, REQUEST	XX	XX	XX	XX	XX	XX	XX	XX	XX	XX
J31.0C2 DATA ELEMENT										
MEMORY LOCATION, REKEY	XX	XX	TX	XR	TX	XX	XX	XX	XX	XX
CRYPTOVARIABLE LOGICAL LABEL, REKEY	XX	XX	TX	XR	TX	XX	XX	XX	XX	XX
CRYPTOPERIOD DESIGNATOR, REKEY	XX	XX	TX	XR	TX	XX	XX	XX	XX	XX
CRYPTOVARIABLE SYNCHRONIZATION BITS	XX	XX	TX	XR	TX	XX	XX	XX	XX	XX
CRYPTOVARIABLE LOGICAL LABEL SYNCHRONIZATION	XX	XX	TX	XR	TX	XX	XX	XX	XX	XX
CRYPTOPERIOD DESIGNATOR, SYNCHRONIZATION	XX	XX	TX	XR	TX	XX	XX	XX	XX	XX

MIL-STD-6016B

APPENDIX A

TABLE A.5-J31.1. Word, Data Element, and Data Item Minimum Implementation

WORD LEVEL

<u>WORD</u>	<u>MIN IMP</u>
J31.1I	TR
J31.1E0	TR
J31.1E1	TR

DATA ELEMENT LEVEL

<u>J31.1I</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
TRACK NUMBER, ADDRESSEE	TR
ACTION CODE, OVER-THE-AIR REKEYING	TR
MEMORY LOCATION, REKEY	TR
CRYPTOVARIABLE LOGICAL LABEL, REKEY	TR
CRYPTOPERIOD DESIGNATOR, REKEY	TR
CRYPTOVARIABLE, PART I	TR
RECEIPT/COMPLIANCE	TR
RECURRENCE RATE, RECEIPT/COMPLIANCE	TR

<u>J31.1E0</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
CRYPTOVARIABLE, PART II	TR

<u>J31.1E1</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
CRYPTOVARIABLE, PART III	TR

MIL-STD-6016B

APPENDIX A

TABLE A.5-J31.7. Word, Data Element, and Data Item Minimum Implementation

WORD LEVEL

<u>WORD</u>	<u>MIN IMP</u>
J31.7I	TR

DATA ELEMENT LEVEL

<u>J31.7I</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
SPARE	TR

APPENDIX A

TABLE A.5-RTT-A. Word, Data Element, and Data Item Minimum Implementation

WORD LEVEL

<u>WORD</u>	<u>MIN IMP</u>
RTT-A	TR

DATA ELEMENT LEVEL

<u>RTT-A</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
TIME SLOT TYPE	TR
RTT INTERROGATION TYPE	TR
TRACK NUMBER, ADDRESSEE	TR
SECURE DATA UNIT SERIAL NUMBER	TR

APPENDIX A

TABLE A.5-RTT-B. Word, Data Element, and Data Item Minimum Implementation

WORD LEVEL

<u>WORD</u>	<u>MIN IMP</u>
RTT-B	TR

DATA ELEMENT LEVEL

<u>RTT-B</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
TIME SLOT TYPE	TR
RTT INTERROGATION TYPE	TR
TIME QUALITY	TR
SECURE DATA UNIT SERIAL NUMBER	TR

MIL-STD-6016B

APPENDIX A

TABLE A.5-RTT-REPLY. Word, Data Element, and Data Item Minimum Implementation

WORD LEVEL

<u>WORD</u>	<u>MIN IMP</u>
RTT-REP	TR

DATA ELEMENT LEVEL

<u>RTT-REP</u> <u>DATA ELEMENT</u>	<u>MIN IMP</u>
TIME OF ARRIVAL	TR
SECURE DATA UNIT SERIAL NUMBER	TR

MIL-STD-6016B

APPENDIX A

THIS PAGE INTENTIONALLY LEFT BLANK

INCH-POUND

MIL-STD-6016B
1 August 2002
Superseding
MIL-STD-6016A
30 April 1999

DEPARTMENT OF DEFENSE INTERFACE STANDARD

TACTICAL DATA LINK (TDL) 16 MESSAGE STANDARD

APPENDIX B - DATA ELEMENT DICTIONARY



AMSC N/A

AREA: INST

DISTRIBUTION STATEMENT D: Distribution authorized to DOD and U.S. DOD contractors for administrative or operational use. Other requests for this document shall be forwarded to Defense Information Systems Agency (DISA/IN5). See distribution warning on page B-iii.

MIL-STD-6016B

APPENDIX B

THIS PAGE IS INTENTIONALLY LEFT BLANK

MIL-STD-6016B

APPENDIX B

DISTRIBUTION WARNING

WARNING - This document contains technical data whose export is restricted by the Arms Export Control Act (Title 22, U.S.C., Sec. 2751 et seq.) or Executive Order 12470. Violations of these export laws are subject to severe criminal penalties. Disseminate in accordance with provisions of DOD Directive 5230.25.

MIL-STD-6016B

APPENDIX B

THIS PAGE IS INTENTIONALLY LEFT BLANK

MIL-STD-6016B

APPENDIX B

DATA ELEMENT DICTIONARY

TABLE OF CONTENTS

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
B.1	Scope.....	B-1
B.2	Applicable Documents.....	B-1
B.3	Definitions.....	B-1
B.4	General Requirements.....	B-1
B.4.1	Rules and Conventions.....	B-1
B.4.1.1	General.....	B-1
B.4.1.2	DFI.....	B-2
B.4.1.3	DUI.....	B-3
B.4.1.4	DI.....	B-3
B.4.1.5	Definition of Symbols that can be used in DFI and DUI Name.....	B-6
B.4.2	Description.....	B-6
B.5	Detailed Requirements.....	B-12
B.5.1	Index of DFIs and DUIs.....	B-12
B.5.2	Message Elements.....	B-146

LIST OF TABLES

<u>Table</u>	<u>Page</u>
Table B-1	Alphabetical List of Data Field Identifiers (DFIs).....B-13
Table B-2	Numeric List of Data Field Identifiers (DFIs).....B-25
Table B-3	Alphabetical List of Data Use Identifiers (DUIs).....B-37
Table B-4	Numeric List of Data Use Identifiers (DUIs) Within Data Field Identifier (DFI).....B-91

LIST OF FIGURES

<u>Figure</u>	<u>Page</u>
Figure B-1	DFI Format.....B-10

APPENDIX B

THIS PAGE IS INTENTIONALLY LEFT BLANK

MIL-STD-6016B

APPENDIX B

APPENDIX B GROUP

B.1 SCOPE

This document contains the data elements used in Link 16. The data elements are uniquely specified by two numbers, the Data Field Identifier (DFI) and its Data Use Identifier (DUI). The DFI includes a single concept and is the generic representation of the DUIs grouped under it. The DUIs, which are representative of the DFI concept, contain the Data Items (DIs) used to compose the data element. The DFIs are listed in numerical sequence. Alphabetical and numerical indexes of the DFIs and DUIs are included before the first DFI.

B.2 APPLICABLE DOCUMENTS

The documents listed in section 2 of this standard are applicable to this appendix.

B.3 DEFINITIONS

The definitions in section 3 of this standard apply to this appendix.

B.4 GENERAL REQUIREMENTS

B.4.1 RULES AND CONVENTIONS

This section describes the structure and use of DFIs, DUIs, and DIs as well as the related data to be used in developing data elements.

B.4.1.1 GENERAL

a. Every special character used in the formatting of a DFI shall have a predetermined meaning.

b. Use readily understood terms.

APPENDIX B

c. Acronyms may be used as part of a name, but must be spelled out in the definition or explanation.

d. DFI and DI names shall be as short as practicable.

B.4.1.2 DFI

All DFIs must have at least one associated DUI.

B.4.1.2.1 DFI NAME

a. Each DFI name shall be unique.

b. The DFI name shall identify a single concept.

c. The DFI name shall be a generic representation of the contained DUIs.

d. The DFI name shall be singular.

e. Group words (type, category, degree, designator, etc.) in DFI names shall follow modifying words and phrases, e.g., "Aircraft Type" rather than "Type of Aircraft."

B.4.1.2.2 DFI DEFINITION

a. The DFI definition shall be provided only when necessary for amplification.

b. The DFI definition shall be a generic definition of the concept represented by the associated DUIs.

c. The DFI definition shall attempt to use definitions from previously accepted standards.

d. The DFI definition shall be based on a review of all appropriate definition sources.

APPENDIX B

B.4.1.3 DUI

All DUIs must have associated DIs.

B.4.1.3.1 DUI NAME

- a. Each DUI name shall be unique.
- b. All DUI names shall be singular.
- c. Parallelism of phraseology of all DUI names within the DFI shall be preserved.
- d. DUI names shall be representative of the DFI concept.

B.4.1.3.2 FIELD DESCRIPTOR

Field descriptors shall be provided for all DUIs whose name will not fit within the allocated space in the word map (Section 5).

B.4.1.3.3 DUI EXPLANATION

- a. A DUI explanation shall exist for each DUI.
- b. A DUI explanation shall not be a restatement of the name.
- c. A DUI explanation shall not be solely an example.

B.4.1.4 DI

- a. Split DUIs shall be indicated by a virgule between the DUI numbers, e.g., "FOR DUI 001/005."
- b. Ranges of DUIs shall be indicated by a dash between the inclusive DUI numbers, e.g., "FOR DUIs 003-006."

APPENDIX B

B.4.1.4.1 DI NAME

- a. Within a DUI, each DI shall have a specific name and meaning.
- b. DIs shall be consistent with the explanation of the DUI.

B.4.1.4.2 BIT CODES

a. Bit codes shall be expressed in decimal with the exception of DIs that are displayed to the operator in octal, e.g., IFF/SIF. When the bit code is octal, a notation shall be made to indicate that octal values are used.

b. Within a DUI, each DI shall be represented by a unique bit code and have a specific meaning.

B.4.1.4.3 DI EXPLANATION

a. The DI explanation shall be provided only when necessary for amplification.

b. The DI explanation shall attempt to use explanations from previously accepted standards.

c. The DI explanation shall be based upon a review of all appropriate sources.

d. The DI explanation shall not be a restatement of the name unless it is spelling out an acronym.

e. When a DI name is "NUMERIC," the DI explanation must contain a description of what the DI represents. For example:

<u>Data Item</u>	<u>Bit Code</u>	<u>Explanation</u>
(NUMERIC) (SEE EXPLANATION)	(0 THROUGH 127)	Explanation. . .

APPENDIX B

f. In expressing numerical quantities, the following are the type of entries required:

<u>Data Item</u>	<u>Bit Code</u>	<u>Explanation</u>
(0 THROUGH 511 3/4 DATA MILES (NO STATEMENT) (-511 3/4 THROUGH -1/4 DATA MILES)	(0 THROUGH 2047) (2048) (2049 THROUGH 4095)	Distance in 1/4 data mile increments

B.4.1.4.4 GENERIC DATA ITEMS ENTRIES

<u>Term</u>	<u>Meaning</u>
DISUSED	A DI value that was previously named but is no longer valid. A DISUSED value cannot be renamed without determining if coordinated implementation is required.
UNDEFINED	A term used to describe a bit code that has no value currently assigned but may have a value assigned in the future. (This occurs in logically coded items (DUIs) in which all the DIs in the DUI do not have assigned values.)
ILLEGAL	A term used to describe a bit code that is not a permissible entry into the tactical data system(s) supporting the interface, e.g., a 9 bit DUI called HEADING that has legal values of 0 through 359 representing degrees has illegal values of 360 through 511.
NO STATEMENT	A DI that indicates no information on this DUI is being transmitted. (This does not necessarily indicate that the originator does not have the information.)
UNKNOWN	A DI that indicates other values available for this DUI have not been determined by the originator.
TO BE DETERMINED	DI design is incomplete. (DI names and bit codes will be specified at a later time.)

APPENDIX B

B.4.1.4.5 NO STATEMENT ASSIGNMENT

When two options are shown, the binary value 0 shall be used as NO STATEMENT except when the binary value 0 has a valid numeric value, in which case the highest binary value shall be used.

The following examples of a 3 bit DUI show the proper assignment (indicated by an asterisk) of the NO STATEMENT DI name:

<u>Binary Value</u>	<u>Logical</u>	<u>Unsigned</u>	<u>Sign+ Magnitude</u>	<u>Twos Complement</u>	<u>Mod Twos Complement</u>	<u>Ones Complement</u>
000	a*	0	+0	0	-4*	+0
001	b	1	+1	+1	-3	+1
010	c	2	+2	+2	-2	+2
011	d	3	+3	+3	-1	+3
100	e	4	-0*	-4*	0	-3
101	f	5	-1	-3	+1	-2
110	g	6	-2	-2	+2	-1
111	h*	7*	-3	-1	+3	-0*

B.4.1.5 DEFINITION OF SYMBOLS THAT CAN BE USED IN DFI AND DUI NAME

- a. Hyphen (-) shall be used in compound terms.
- b. Virgule (/) shall be used with bona fide acronyms and in the expression "and/or" only.
- c. Parentheses () shall be used to enclose an acronym when both title and acronym are included in name.
- d. Comma (,) shall be used in its normal sense.
- e. No other symbols shall be used.

B.4.2 DESCRIPTION

Figure B-1 shows the format of the DFI information that can be displayed on individual DFIs. In order to explain the information in the DFI listings, the paragraphs following Figure B-1 are keyed to the numbers in the figure,

APPENDIX B

i.e., the parenthetical numbers to the left of the text correspond to the bold parenthetical numbers in Figure B-1.

In the figure, all information is in capital letters; parentheses and dashes are exactly as printed in the listing. Zs indicate zero suppression, 9s indicate numerics, and Xs indicate alphanumerics.

(1) Classification. The highest classification of the information contained on that page is printed at the top and bottom of each page. Each paragraph has its classification printed to the left in parentheses. US markings are one character in length, and NATO markings are two characters.

(2) DFI Number. The DFI number is printed at both the top and bottom of each page. The DFI number consists of a maximum of 4 digits with the first leading zero suppressed.

(3) DFI Name. The DFI name is printed at the top of each page. The DFI name is limited to a maximum of 30 alphanumerics for the first line and a maximum of 28 for the second line.

(4) DFI Definition. The DFI definition is used only when the meaning of the DFI is unclear. It consists of a maximum of 62 alphanumerics for the first line and 60 for the second through tenth lines (a maximum of 10 lines).

(5) Data Standard Usage. This information indicates the name of those standards using this DFI. It consists of 9 alphanumerics followed by a space with a maximum of three 9 character groups per line and a maximum of 3 lines.

(6) Status. This element identifies the current status of the DFI. It consists of a maximum of 3 lines of alphanumerics with a maximum of 20 characters per line.

(7) DUI Number. The DUI number consists of 3 digits with no suppression.

(8) DUI Name. The DUI name consists of a maximum of 30 alphanumerics for the first line and a maximum of 28 alphanumerics for the second line.

APPENDIX B

(9) DUI Explanation. The DUI explanation consists of a maximum of 36 alphanumerics for the first line and 34 alphanumerics for all following lines with a maximum of 999 lines.

(10) Word Applicability. This element identifies the word(s) (See Section 5, Paragraph 5.4) that use the DUI it appears with. It consists of a maximum of 999 lines per DUI with 3 words per line.

(11) Change Bars. Change bars appear to the right of a line that has changed from a previous edition.

(12) Bit. This element identifies the number of bits that make up the DUI. It consists of 3 digits with leading zeros suppressed.

(13) Field Descriptor. The field descriptor is an abbreviation used in place of the DUI name when the DUI name will not fit in the allocated space of a word map. The maximum number of alphanumerics is determined by the DUI bit size as follows:

- a. For a 1 bit field, 2 lines of 3 characters each.
- b. For a 2 bit field, 3 lines of 7 characters each.
- c. For a 3 bit field, 3 lines of 11 characters each.
- d. For a 4 or more bit field, 3 lines of 15 characters each.

If a field descriptor does not exist for a DUI, this element will be blank.

(14) Ultra Header DI Qualifier. This is a qualifier for the DIs that follow and is composed of one line with a maximum of 68 alphanumeric characters.

(15) Major Header DI Qualifier. This is a qualifier for the DIs that follow and is composed of a maximum of five lines. The first line contains a maximum of 24 alphanumeric characters, and the second through the fifth lines each contain a maximum of 22 alphanumeric characters.

APPENDIX B

(16) Subheader DI Qualifier. This is a qualifier for the DIs that follow and is composed of a maximum of five lines. The first line contains a maximum of 24 alphanumeric characters, and the second through the fifth lines each contain a maximum of 22 alphanumeric characters.

(17) Page Number. A sequence number (beginning with one for each DFI) showing the page number within the total number of pages for the DFI. The page number consists of a maximum of 3 digits with leading zeros suppressed.

(18) DI Name. The DI name is composed of a maximum of 999 lines. The first line consists of a maximum of 24 alphanumeric characters, and the remaining lines each contain a maximum of 22 characters.

(19) DI Bit Code. The DI bit code is the numeric value corresponding to the associated DI name. It consists of 999 lines with each line consisting of a maximum of 24 alphanumeric characters. It is normally specified in decimal. It is specified in octal only for those data elements that are normally displayed in octal digits.

(20) DI Explanation. The DI explanation consists of a maximum of 999 lines. The first line consists of a maximum of 36 alphanumeric characters, and the remaining lines each contain a maximum of 34 characters.

B-10

Figure B-1. DFI Format (Sheet 1 of 2)

CLASSIFICATION (1)		
(2) DFI	NAME (3)	
(X) ZZ999	XXXX.....XXX XX.....XXX	
	DATA ITEM (CONT'D) (18)	BIT CODE
(X)	XXX.....XXXX XXX.....XXXX	XXX.....XXXX (19)
		EXPLANATION (20)
		XXXXX.....XXXX XXX.....XXXX
CLASSIFICATION (1)		
DFI NO ZZ999 PAGE ZZ9 OF Z99		
(2) (17)		

Figure B-1. DFI Format (Sheet 2 of 2)

APPENDIX B

B.5 DETAILED REQUIREMENTS

B.5.1 INDEX OF DFIs AND DUIs

To assist in using this standard, four listings immediately follow this page. The first list, Table B-1, is ordered alphabetically by DFI name, the second list, Table B-2, is ordered numerically by DFI number, the third, Table B-3, is ordered alphabetically by DUI name, and the fourth, Table B-4, is ordered numerically by DUI number. Each table also contains the revision date of the DFI.

APPENDIX B

TABLE B-1. ALPHABETICAL LIST OF DATA FIELD IDENTIFIERS (DFIS)

SHEET 1	
DFI NAME	DFI NO.
ABSOLUTE VALUE	1103
ACCELERATION	1104
ACCESS DESCRIPTION	1772
ACKNOWLEDGEMENT DATA AMPLIFIER	796
ACKNOWLEDGEMENT DATA DESIGNATOR	795
ACTION	803
ACTION CODE, CRYPTOVARIABLE	897
ACTION CODE, OTAR	876
ACTION VALUE	1075
ACTION, COMMUNICATION CONTROL	1769
ACTION, TIME SLOT ASSIGNMENT	1771
ACTION/INFORMATION INDICATOR	1740
ACTIVE RELAY INDICATOR	1571
ACTIVE RUNWAY	845
ACTIVITY AMPLIFICATION INDEX	752
ADD/DELETE INDICATOR	777
AGILE EMITTER	1502
AIR RAID STATE	1866
AIR SPECIFIC TYPE	804
AIRBORNE INDICATOR	732
AIRCRAFT MODEL	1661
AIRFIELD STATUS	1865
ALERT CONDITION	391
ALERT STATUS CHANGE	1751
ALLOCATED PG INDEX NUMBER	1783
ALLOCATED ROUTE NUMBER	1784
ALTERNATE FIELD INDICATOR	351
ALTIMETER SETTING	789
ALTITUDE (HEIGHT)	365
ALTITUDE AMPLIFICATION	1682
ALTITUDE DATA SOURCE	364
AMPLIFICATION	601
AMPLIFYING CHARACTERISTICS	426
ANGULAR ELEVATION	428
ANTENNA SCAN RATE	1580
ARM	1207
ASSIGN/DEASSIGN INDICATOR	1788
ASSIGN/DEASSIGN UNIT DESIGNATOR	1792

APPENDIX B

TABLE B-1. ALPHABETICAL LIST OF DATA FIELD IDENTIFIERS (DFIS)

SHEET 2

DFI NAME	DFI NO.
AUDIO	361
AUTOMATIC EA NEGATION	1833
AUTOPILOT CONTROL INDICATOR	705
AUTOPILOT STATUS	706
AVAILABLE SUPPORT INDICATORS	1870
AXIS	419
AXIS ORIENTATION	1806
BAILOUT INDICATOR	1646
BASE ACTUAL WEATHER	287
BASE WEATHER STATE	1869
BEACON CODE	1628
BEARING	372
BEARING ACCURACY	383
BEARING DRIFT	360
BEARING ORIGIN	1811
BEARING REPORT TYPE	373
BETA	1105
BETA ANGLE	284
BLOCK SIZE INDICATOR	798
BROAD CLASSIFICATION	425
BROADBAND	374
CALLSIGN	1850
CHANGE RADIATION FACTOR	1826
CHANNEL	852
CHANNEL NUMBER	420
CHARACTER	1851
CIRCUIT	1827
CLOUD COVER	775
COMMAND	398
COMMAND AND CONTROL INDICATOR	893
COMMAND MISSION	701
COMMUNICANT STATUS UPDATE	1780
INDICATOR	
COMMUNICATIONS IMPAIRMENT	1652
COMMUNITY DESIGNATOR	1774
CONFIDENCE	431
CONFIDENCE LEVEL	358
CONNECTIVITY INTERROGATION	1726
INSTRUCTION	
CONNECTIVITY MONITOR, ENABLE	1777

APPENDIX B

TABLE B-1. ALPHABETICAL LIST OF DATA FIELD IDENTIFIERS (DFIS)

SHEET 3

DFI NAME	DFI NO.
CONNECTIVITY QUALITY	1725
CONNECTIVITY STATUS	1728
INSTRUCTION	
CONNECTIVITY STATUS LEVEL	1729
CONTINUATION WORD LABEL	1551
CONTROL CHANGE ACTION	1647
CONTROL COMMAND	707
CONTROL INDICATOR	1670
CONTROL POSITIONS	1678
CONTROLLING UNIT INDICATOR	1750
CORRELATION INDICATOR	1862
COVARIANCE DATA ELEMENT	1106
CRYPTOMODE INDICATOR	802
CRYPTOPERIOD DESIGNATOR	1546
CRYPTOPERIOD INDICATOR	875
CRYPTOSTATUS INFORMATION	1549
CRYPTOVARIABLE	885
CRYPTOVARIABLE LOGICAL LABEL	801
CRYPTOVARIABLE SYNCHRONIZATION	887
BITS	
CYCLE	312
DATA LINK	1206
DATA REPORT TYPE	357
DATA TYPE INDICATOR	385
DATA UPDATE REQUEST INDICATOR	1675
DATUM ERROR	1568
DECOY MISSION	1847
DECOY TYPE	1848
DELTA ELEVATION	1660
DELTA EPOCH	1615
DELTA LATITUDE	289
DELTA LONGITUDE	290
DEMAND	1956
DEPTH	366
DISCRETE MESSAGE	704
DISPLACED POSITION INDICATOR	1619
DISSEMINATION MODE INDICATOR	1936
DISUSED	758
DIVE ANGLE	1890
DOPPLER	370

APPENDIX B

TABLE B-1. ALPHABETICAL LIST OF DATA FIELD IDENTIFIERS (DFIS)

SHEET 4

DFI NAME	DFI NO.
DUTY ASSIGNMENT	702
EA FREQUENCY BAND STATUS	272
ELECTRONIC WARFARE COORDINATOR INDICATOR	368
ELEVATION	1612
ELEVATION ANGLE/ALTITUDE INDICATOR	1852
EMERGENCY INDICATOR	355
EMERGENCY TYPE	1641
EMISSION CONTROL PLAN	1822
EMISSION POLARIZATION	434
EMITTER FUNCTION	1843
EMITTER NUMBER	422
EMITTER NUMBER INDICATOR	266
EMITTER OPERATION MODE NUMBER	430
EMITTER STATUS	342
END POINT INDICATOR	1645
EPOCH	448
EPOCH NUMBER	1539
EPOCH SUBDIVISION	755
EQUIPMENT STATUS	1665
EQUIPMENT STATUS INDICATOR	1664
ES FREQUENCY BAND STATUS	268
ESTIMATED YIELD	1767
EW COORDINATION	1803
EW PARAMETER INDICATOR	362
FILTER INDICATOR	1745
FILTER NUMBER	1747
FILTER UNIT TYPE	1520
FIX OR BEARING TYPE	382
FLIGHT DECK STATUS	878
FLIGHT LEADER INDICATOR	730
FLIGHT PATH ERROR	708
FLIGHT/FORCE SIZE	386
FORCE TELL INDICATOR	354
FORWARDED UNIT TYPE	1719
FREQUENCY	417
FREQUENCY AGILITY	1203
FREQUENCY EXPONENT	1963
FREQUENCY SCALE INDICATOR	1820

APPENDIX B

TABLE B-1. ALPHABETICAL LIST OF DATA FIELD IDENTIFIERS (DFIS)

SHEET 5

DFI NAME	DFI NO.
FREQUENCY/FREQUENCY RANGE INDICATOR	1819
FUEL	409
FUEL FUNCTION	806
FUSION TYPE	1301
FUTURE EVENT	857
GEOGRAPHIC AREA FILTERED	1748
GUN CAPABLE	1624
HEADING	371
HOLDING CONTACT	356
HOP COUNT	1976
HOURL	792
ICAO CODE	1868
ID/STRENGTH INDICATOR	1926
IDENTIFICATION LETTER/NUMBER	731
IDENTITY	376
IDENTITY CONFIDENCE	1663
IDENTITY DIFFERENCE INDICATOR	1860
IMMEDIATE ACTION INDICATOR	1839
INDEX NUMBER	1781
INDICATOR	1107
INDICATOR	325
INFORMATION GROUP	838
INFORMATION MANAGEMENT ACTION NUMBER	1606
INITIAL ENTRY INDICATOR	1779
INITIATE/CANCEL ACTION INDICATOR	390
INTEREST ROUTE INDICATOR	1735
PARAMETERS	
JAMMER RECEIVED SIGNAL LEVEL	427
JAMMER TYPE	1933
JITTER INDICATION	432
LABEL	270
LAND (GROUND) SPECIFIC TYPE	810
LANDING APPROACH CONDITION	1545
LASER ILLUMINATOR CODE	1676
LATITUDE	281
LAUNCH CAPABILITY	1973

TABLE B-1. ALPHABETICAL LIST OF DATA FIELD IDENTIFIERS (DFIS)

SHEET 6

DFI NAME	DFI NO.
LINE/AREA CONTINUATION INDICATOR	1720
LINK 4A ADDRESS	291
LINK 4A ADDRESS INDICATOR	1718
LINK/STATUS	1625
LOCALLY DEFINED AMPLIFYING DATA	754
LOCATION OF CRYPTOVARIABLE	866
LOCK-ON	429
LONGITUDE	282
LORAN FILTER SETTING	771
MESSAGE LENGTH	800
MESSAGE TYPE	265
MESSAGES RECEIVED INDICATOR	1541
METHOD OF FIRE	1050
MINUTE	797
MISSION ASSIGNMENT	1626
MISSION COMMANDER INDICATOR	1901
MISSION CORRELATOR	725
MISSION CORRELATOR CHANGE	1669
MODE APPLICABILITY	1610
MODE I CODE	293
MODE II CODE	294
MODE III CODE	295
MODE III IFF INTERROGATION	815
MODE IV INDICATOR	298
MODE OF DELIVERY	1658
MODULATION CODE	1849
MULTIPLE EVALUATION	423
MUNITIONS AVAILABILITY	1872
NATIONALITY/ALLIANCE	748
NEEDLINE PG STATUS AMPLIFY	1790
NEEDLINE PG, STATUS	1789
NET CONTROL NUMBER	1542
NET CONTROL STATION STATUS	1786
NET NUMBER	348
NETWORK PARTICIPATION STATUS INDICATOR	1613
NUCLEAR/BIOLOGICAL/CHEMICAL CONTAMINATION	1867

APPENDIX B

TABLE B-1. ALPHABETICAL LIST OF DATA FIELD IDENTIFIERS (DFIS)

SHEET 7

DFI NAME	DFI NO.
NUMBER OF AIRCRAFT	1898
NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE	396
NUMBER OF MISSILES	1599
OPERATIONAL FUNCTION	501
OPERATIONAL IMPAIRMENT	1600
OPERATIONAL STATUS	753
ORDER	389
ORIGIN OF INDEX NUMBER	1864
ORIGINATOR ENVIRONMENT/CATEGORY	275
PAIRING ACTION	400
PARTICIPANT INDEX NUMBER	1782
PASSIVE/ACTIVE INDICATOR	892
PATH QUALITY	1540
PDI	1204
PERIMETER ENGAGEMENT STATUS	395
PERIODICITY OF REPORT	1808
PERSONNEL INVOLVED	1643
PLAN MODIFICATION	1824
PLAN SOURCE	1836
PLATFORM	1797
PLATFORM ACTIVITY	1798
PLATFORM TYPE	1802
POINT INDICATOR	1657
POINT SEQUENCE NUMBER	1683
POINT TYPE	363
POINT TYPE AMPLIFICATION	379
POINT/LINE DESCRIPTOR	1554
POINT/TRACK INDICATOR	378
POINTER	1863
POOL NUMBER	1616
POSITION ACCURACY	1642
POSITION, WGS-84	1108
PPLI DATA INDICATOR	839
PRECISION AIRCRAFT DIRECTION DISCRETE	1721
PRIORITY	1816
PROBABILITY	369
PROBABILITY OF KILL	1001

APPENDIX B

TABLE B-1. ALPHABETICAL LIST OF DATA FIELD IDENTIFIERS (DFIS)

SHEET 8

DFI NAME	DFI NO.
PROPRIETARY FORMAT	1743
PROPRIETARY INFORMATION	1744
PULSE DURATION	435
PULSE REPETITION FREQUENCY	440
PULSE REPETITION INTERVAL	1903
QUALITY	283
RADAR CHANNEL INDICATOR	828
RADAR PRF	1943
RADIATION RESTRICTION	1825
RADIATION STATUS INDICATOR	1818
RADIO SECURE MODE INDICATOR	1649
RADIO STATUS	1666
RADIO TYPE	1648
RANGE	757
RANGE ACCURACY, ASW	375
RATE OF CHANGE	384
RECCE/EW SYSTEM TYPE	1934
RECEIPT/COMPLIANCE	392
RECEIVE COUNT	1966
RECURRENCE RATE	444
RELATIVE AZIMUTH QUALITY	285
RELATIVE POSITION QUALITY	278
RELAY ASSIGNMENT INDICATOR	896
RELAY CONTROL	850
RELAY DELAY	843
RELAY FUNCTION	863
RELAY INDICATOR	273
RELAY LABEL	865
RELAY LEVEL	1775
RELAY ROUTE INDICATOR	1734
PARAMETERS	
REPORT FORMAT	1543
REPORT INDICATOR	549
REFROMULGATION COUNTER	1668
REFROMULGATION ORIGINATION	1778
CONTROL	
REFROMULGATION RELAY STATE	1776
REQUEST NUMBER	1809
RESPONSE INDICATOR	710
RESPONSE TIME	1787

APPENDIX B

TABLE B-1. ALPHABETICAL LIST OF DATA FIELD IDENTIFIERS (DFIS)

SHEET 9

DFI NAME	DFI NO.
RESPONSE VALUE	1553
ROAD NUMBER	1916
ROOT VARIANCE	1109
ROUND-TRIP-TIMING REPLY STATUS INDICATOR	274
ROUTE NUMBER	1727
RTT INTERROGATION TYPE	844
RUNWAY AVAILABLE LENGTH	1875
RUNWAY BRAKING ACTION	1886
RUNWAY INDICATOR	1888
RUNWAY STATUS	1874
RUNWAY VISUAL RANGE	286
RUNWAY/FLIGHT DECK EQUIPMENT	1873
SAM MODE STATE	1576
SCAN TYPE	433
SECOND	380
SECTOR WIDTH	1804
SECTOR/AREA/LOCATION INDICATOR	1805
SECURE DATA UNIT SERIAL NUMBER	1677
SENSOR	359
SENSOR TARGET REPORTING STATUS	1351
SENSOR TYPE	1953
SEQUENTIAL BLOCK/FIELD FLAG	799
SET (TIME SLOT)	847
SHORADEZ	1871
SIGN	1110
SIMULATION INDICATOR	1604
SITE TYPE	1555
SLAVED INDICATOR	1716
SLOT ASSIGN INDEX NUMBER	1552
SONOBUOY PATTERN	350
SONOBUOY TYPE	349
SOUND PROPAGATION PATH	377
SOURCE	1812
SPACE SPECIFIC TYPE	749
SPARE BIT	756
SPECIAL CODE	1752
SPECIAL CODE APPLICABILITY	296
SPECIAL INTEREST INDICATOR	1861
SPECIAL PROCESSING INDICATOR	292

APPENDIX B

TABLE B-1. ALPHABETICAL LIST OF DATA FIELD IDENTIFIERS (DFIS)

SHEET 10	
DFI NAME	DFI NO.
SPECIFIC TYPE INDICATOR	267
SPEED	367
SQUAWK FLASH INDICATOR	1650
SUBLABEL	271
SUBSURFACE (MARITIME) SPECIFIC TYPE	809
SUMMATION INDICATOR	1621
SURFACE (MARITIME) SPECIFIC TYPE	808
TABLE ENTRY	1946
TARGET DEFENSES	890
TARGET TYPE	889
TEST DURATION COUNT	1791
TEST PATTERN	445
THREAT EVALUATION	424
THREAT POSTURE	401
THREAT TYPE	1762
THREAT WARNING ENVIRONMENT	814
TIME	387
TIME AMPLIFIER	1659
TIME CORRECTION	442
TIME DURATION	1840
TIME FUNCTION	1681
TIME QUALITY	279
TIME SHARING IMPLEMENTATION	1834
TIME SLOT ASSIGNMENT ACTION	446
TIME SLOT ASSIGNMENT TYPE	449
TIME SLOT NUMBER	441
TIME TAG	1986
TIME TAG, TIME OF VALIDITY	826
TIMEOUT INTERVAL	1544
TOTAL POINTS IN SERIES	891
TRACK NUMBER APPLICABILITY	299
TRACK NUMBER, ATDL-1	746
TRACK NUMBER, IJMS	352
TRACK NUMBER, LINK 11/LINK 11B	269
TRACK NUMBER, LINK 16	769
TRACK NUMBER, LINK 4A	768
TRACK NUMBER, NATO LINK 1	747

APPENDIX B

TABLE B-1. ALPHABETICAL LIST OF DATA FIELD IDENTIFIERS (DFIS)

SHEET 11

DFI NAME	DFI NO.
TRACK NUMBER, REFERENCE/INDEX NUMBER INDICATOR	381
TRACK QUALITY	280
TRACKING MODIFIER	1906
TRACKING STATUS	1627
TRANSMISSION TERMINATION DESIGNATOR	1770
TYPE	1622
TYPE MODIFIER	849
TYPE OF BURST	1768
TYPE OF STORES	1623
U COORDINATE	276
UNCERTAINTY INDEX	353
UNIQUE VARIABLE UPDATE NUMBER	1548
UNIT CAPABILITY/WEAPON TYPE	399
UNIT DESIGNATOR	1793
UNIT/MISSION TYPE	288
UPDATE	1111
UTM 100,000 METER SQUARE ROW	816
UTM 100,000-METER SQUARE COLUMN	821
UTM EASTING	819
UTM GRID ZONE COLUMN	818
UTM GRID ZONE ROW	825
UTM NORTHING	820
V COORDINATE	277
VARIANCE	1120
VECTOR DISCRETE	1651
VELOCITY COVARIANCE DATA ELEMENT	1112
VELOCITY, WGS-84	1113
VELOCITY.	1401
VOICE CALL	264
VOICE CALL SIGN INTERPRETATION INDICATOR	1717
VOICE FREQUENCY/CHANNEL INDICATOR	898
VOICE GROUP	894
WARTIME RESERVE MODE INDICATOR	1821
WAYPOINT ACTION/DESCRIPTOR	1705

TABLE B-1. ALPHABETICAL LIST OF DATA FIELD IDENTIFIERS (DFIS)

SHEET 12

DFI NAME	DFI NO.
WEAPON SYSTEM TYPE	700
WEAPON/ENGAGEMENT STATUS	394
WEAPON/SENSOR INVENTORY	408
WIND SHEAR	1887
WORD FORMAT	1550

APPENDIX B

TABLE B-2. NUMERICAL LIST OF DATA FIELD IDENTIFIERS (DFIS)

SHEET 1

DFI NAME	DFI NO.
VOICE CALL	264
MESSAGE TYPE	265
EMITTER NUMBER INDICATOR	266
SPECIFIC TYPE INDICATOR	267
ES FREQUENCY BAND STATUS	268
TRACK NUMBER, LINK 11/LINK 11B	269
LABEL	270
SUBLABEL	271
EA FREQUENCY BAND STATUS	272
RELAY INDICATOR	273
ROUND-TRIP-TIMING REPLY STATUS INDICATOR	274
ORIGINATOR ENVIRONMENT/CATEGORY	275
U COORDINATE	276
V COORDINATE	277
RELATIVE POSITION QUALITY	278
TIME QUALITY	279
TRACK QUALITY	280
LATITUDE	281
LONGITUDE	282
QUALITY	283
BETA ANGLE	284
RELATIVE AZIMUTH QUALITY	285
RUNWAY VISUAL RANGE	286
BASE ACTUAL WEATHER	287
UNIT/MISSION TYPE	288
DELTA LATITUDE	289
DELTA LONGITUDE	290
LINK 4A ADDRESS	291
SPECIAL PROCESSING INDICATOR	292
MODE I CODE	293
MODE II CODE	294
MODE III CODE	295
SPECIAL CODE APPLICABILITY	296
MODE IV INDICATOR	298
TRACK NUMBER APPLICABILITY	299
CYCLE	312
INDICATOR	325
EMITTER STATUS	342

APPENDIX B

TABLE B-2. NUMERICAL LIST OF DATA FIELD IDENTIFIERS (DFIS)

SHEET 2

DFI NAME	DFI NO.
NET NUMBER	348
SONOBUOY TYPE	349
SONOBUOY PATTERN	350
ALTERNATE FIELD INDICATOR	351
TRACK NUMBER, IJMS	352
UNCERTAINTY INDEX	353
FORCE TELL INDICATOR	354
EMERGENCY INDICATOR	355
HOLDING CONTACT	356
DATA REPORT TYPE	357
CONFIDENCE LEVEL	358
SENSOR	359
BEARING DRIFT	360
AUDIO	361
EW PARAMETER INDICATOR	362
POINT TYPE	363
ALTITUDE DATA SOURCE	364
ALTITUDE (HEIGHT)	365
DEPTH	366
SPEED	367
ELECTRONIC WARFARE COORDINATOR	368
INDICATOR	
PROBABILITY	369
DOPPLER	370
HEADING	371
BEARING	372
BEARING REPORT TYPE	373
BROADBAND	374
RANGE ACCURACY, ASW	375
IDENTITY	376
SOUND PROPAGATION PATH	377
POINT/TRACK INDICATOR	378
POINT TYPE AMPLIFICATION	379
SECOND	380
TRACK NUMBER, REFERENCE/INDEX	381
NUMBER INDICATOR	
FIX OR BEARING TYPE	382
BEARING ACCURACY	383
RATE OF CHANGE	384
DATA TYPE INDICATOR	385

APPENDIX B

TABLE B-2. NUMERICAL LIST OF DATA FIELD IDENTIFIERS (DFIS)

SHEET 3

DFI NAME	DFI NO.
FLIGHT/FORCE SIZE	386
TIME	387
ORDER	389
INITIATE/CANCEL ACTION INDICATOR	390
ALERT CONDITION	391
RECEIPT/COMPLIANCE	392
WEAPON/ENGAGEMENT STATUS	394
PERIMETER ENGAGEMENT STATUS	395
NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE	396
COMMAND	398
UNIT CAPABILITY/WEAPON TYPE	399
PAIRING ACTION	400
THREAT POSTURE	401
WEAPON/SENSOR INVENTORY	408
FUEL	409
FREQUENCY	417
AXIS	419
CHANNEL NUMBER	420
EMITTER NUMBER	422
MULTIPLE EVALUATION	423
THREAT EVALUATION	424
BROAD CLASSIFICATION	425
AMPLIFYING CHARACTERISTICS	426
JAMMER RECEIVED SIGNAL LEVEL	427
ANGULAR ELEVATION	428
LOCK-ON	429
EMITTER OPERATION MODE NUMBER	430
CONFIDENCE	431
JITTER INDICATION	432
SCAN TYPE	433
EMISSION POLARIZATION	434
PULSE DURATION	435
PULSE REPETITION FREQUENCY	440
TIME SLOT NUMBER	441
TIME CORRECTION	442
RECURRENCE RATE	444
TEST PATTERN	445
TIME SLOT ASSIGNMENT ACTION	446

APPENDIX B

TABLE B-2. NUMERICAL LIST OF DATA FIELD IDENTIFIERS (DFIS)

SHEET 4

DFI NAME	DFI NO.
EPOCH	448
TIME SLOT ASSIGNMENT TYPE	449
OPERATIONAL FUNCTION	501
REPORT INDICATOR	549
AMPLIFICATION	601
WEAPON SYSTEM TYPE	700
COMMAND MISSION	701
DUTY ASSIGNMENT	702
DISCRETE MESSAGE	704
AUTOPILOT CONTROL INDICATOR	705
AUTOPILOT STATUS	706
CONTROL COMMAND	707
FLIGHT PATH ERROR	708
RESPONSE INDICATOR	710
MISSION CORRELATOR	725
FLIGHT LEADER INDICATOR	730
IDENTIFICATION LETTER/NUMBER	731
AIRBORNE INDICATOR	732
TRACK NUMBER, ATDL-1	746
TRACK NUMBER, NATO LINK 1	747
NATIONALITY/ALLIANCE	748
SPACE SPECIFIC TYPE	749
ACTIVITY AMPLIFICATION INDEX	752
OPERATIONAL STATUS	753
LOCALLY DEFINED AMPLIFYING DATA	754
EPOCH SUBDIVISION	755
SPARE BIT	756
RANGE	757
DISUSED	758
TRACK NUMBER, LINK 4A	768
TRACK NUMBER, LINK 16	769
LORAN FILTER SETTING	771
CLOUD COVER	775
ADD/DELETE INDICATOR	777
ALTIMETER SETTING	789
HOURLY	792
ACKNOWLEDGEMENT DATA DESIGNATOR	795
ACKNOWLEDGEMENT DATA AMPLIFIER	796

TABLE B-2. NUMERICAL LIST OF DATA FIELD IDENTIFIERS (DFIS)

SHEET 5

DFI NAME	DFI NO.
MINUTE	797
BLOCK SIZE INDICATOR	798
SEQUENTIAL BLOCK/FIELD FLAG	799
MESSAGE LENGTH	800
CRYPTOVARIABLE LOGICAL LABEL	801
CRYPTOMODE INDICATOR	802
ACTION	803
AIR SPECIFIC TYPE	804
FUEL FUNCTION	806
SURFACE (MARITIME) SPECIFIC TYPE	808
SUBSURFACE (MARITIME) SPECIFIC TYPE	809
LAND (GROUND) SPECIFIC TYPE	810
THREAT WARNING ENVIRONMENT	814
MODE III IFF INTERROGATION	815
UTM 100,000 METER SQUARE ROW	816
UTM GRID ZONE COLUMN	818
UTM EASTING	819
UTM NORTHING	820
UTM 100,000-METER SQUARE COLUMN	821
UTM GRID ZONE ROW	825
TIME TAG, TIME OF VALIDITY	826
RADAR CHANNEL INDICATOR	828
INFORMATION GROUP	838
PPLI DATA INDICATOR	839
RELAY DELAY	843
RTT INTERROGATION TYPE	844
ACTIVE RUNWAY	845
SET (TIME SLOT)	847
TYPE MODIFIER	849
RELAY CONTROL	850
CHANNEL	852
FUTURE EVENT	857
RELAY FUNCTION	863
RELAY LABEL	865
LOCATION OF CRYPTOVARIABLE	866
CRYPTOPERIOD INDICATOR	875
ACTION CODE, OTAR	876

APPENDIX B

TABLE B-2. NUMERICAL LIST OF DATA FIELD IDENTIFIERS (DFIS)

SHEET 6

DFI NAME	DFI NO.
FLIGHT DECK STATUS	878
CRYPTOVARIABLE	885
CRYPTOVARIABLE SYNCHRONIZATION	887
BITS	
TARGET TYPE	889
TARGET DEFENSES	890
TOTAL POINTS IN SERIES	891
PASSIVE/ACTIVE INDICATOR	892
COMMAND AND CONTROL INDICATOR	893
VOICE GROUP	894
RELAY ASSIGNMENT INDICATOR	896
ACTION CODE, CRYPTOVARIABLE	897
VOICE FREQUENCY/CHANNEL	898
INDICATOR	
PROBABILITY OF KILL	1001
METHOD OF FIRE	1050
ACTION VALUE	1075
ABSOLUTE VALUE	1103
ACCELERATION	1104
BETA	1105
COVARIANCE DATA ELEMENT	1106
INDICATOR	1107
POSITION, WGS-84	1108
ROOT VARIANCE	1109
SIGN	1110
UPDATE	1111
VELOCITY COVARIANCE DATA	1112
ELEMENT	
VELOCITY, WGS-84	1113
VARIANCE	1120
FREQUENCY AGILITY	1203
PDI	1204
DATA LINK	1206
ARM	1207
FUSION TYPE	1301
SENSOR TARGET REPORTING STATUS	1351
VELOCITY.	1401
AGILE EMITTER	1502
FILTER UNIT TYPE	1520
EPOCH NUMBER	1539

TABLE B-2. NUMERICAL LIST OF DATA FIELD IDENTIFIERS (DFIS)

SHEET 7

DFI NAME	DFI NO.
PATH QUALITY	1540
MESSAGES RECEIVED INDICATOR	1541
NET CONTROL NUMBER	1542
REPORT FORMAT	1543
TIMEOUT INTERVAL	1544
LANDING APPROACH CONDITION	1545
CRYPTOPERIOD DESIGNATOR	1546
UNIQUE VARIABLE UPDATE NUMBER	1548
CRYPTOSTATUS INFORMATION	1549
WORD FORMAT	1550
CONTINUATION WORD LABEL	1551
SLOT ASSIGN INDEX NUMBER	1552
RESPONSE VALUE	1553
POINT/LINE DESCRIPTOR	1554
SITE TYPE	1555
DATUM ERROR	1568
ACTIVE RELAY INDICATOR	1571
SAM MODE STATE	1576
ANTENNA SCAN RATE	1580
NUMBER OF MISSILES	1599
OPERATIONAL IMPAIRMENT	1600
SIMULATION INDICATOR	1604
INFORMATION MANAGEMENT ACTION NUMBER	1606
MODE APPLICABILITY	1610
ELEVATION	1612
NETWORK PARTICIPATION STATUS INDICATOR	1613
DELTA EPOCH	1615
POOL NUMBER	1616
DISPLACED POSITION INDICATOR	1619
SUMMATION INDICATOR	1621
TYPE	1622
TYPE OF STORES	1623
GUN CAPABLE	1624
LINK/STATUS	1625
MISSION ASSIGNMENT	1626
TRACKING STATUS	1627
BEACON CODE	1628
EMERGENCY TYPE	1641

APPENDIX B

TABLE B-2. NUMERICAL LIST OF DATA FIELD IDENTIFIERS (DFIS)

SHEET 8

DFI NAME	DFI NO.
POSITION ACCURACY	1642
PERSONNEL INVOLVED	1643
END POINT INDICATOR	1645
BAILOUT INDICATOR	1646
CONTROL CHANGE ACTION	1647
RADIO TYPE	1648
RADIO SECURE MODE INDICATOR	1649
SQUAWK FLASH INDICATOR	1650
VECTOR DISCRETE	1651
COMMUNICATIONS IMPAIRMENT	1652
POINT INDICATOR	1657
MODE OF DELIVERY	1658
TIME AMPLIFIER	1659
DELTA ELEVATION	1660
AIRCRAFT MODEL	1661
IDENTITY CONFIDENCE	1663
EQUIPMENT STATUS INDICATOR	1664
EQUIPMENT STATUS	1665
RADIO STATUS	1666
REPROMULGATION COUNTER	1668
MISSION CORRELATOR CHANGE	1669
CONTROL INDICATOR	1670
DATA UPDATE REQUEST INDICATOR	1675
LASER ILLUMINATOR CODE	1676
SECURE DATA UNIT SERIAL NUMBER	1677
CONTROL POSITIONS	1678
TIME FUNCTION	1681
ALTITUDE AMPLIFICATION	1682
POINT SEQUENCE NUMBER	1683
WAYPOINT ACTION/DESCRIPTOR	1705
SLAVED INDICATOR	1716
VOICE CALL SIGN INTERPRETATION INDICATOR	1717
LINK 4A ADDRESS INDICATOR	1718
FORWARDED UNIT TYPE	1719
LINE/AREA CONTINUATION INDICATOR	1720
PRECISION AIRCRAFT DIRECTION DISCRETE	1721
CONNECTIVITY QUALITY	1725

APPENDIX B

TABLE B-2. NUMERICAL LIST OF DATA FIELD IDENTIFIERS (DFIS)

SHEET 9

DFI NAME	DFI NO.
CONNECTIVITY INTERROGATION INSTRUCTION	1726
ROUTE NUMBER	1727
CONNECTIVITY STATUS INSTRUCTION	1728
CONNECTIVITY STATUS LEVEL	1729
RELAY ROUTE INDICATOR	1734
PARAMETERS	
INTEREST ROUTE INDICATOR	1735
PARAMETERS	
ACTION/INFORMATION INDICATOR	1740
PROPRIETARY FORMAT	1743
PROPRIETARY INFORMATION	1744
FILTER INDICATOR	1745
FILTER NUMBER	1747
GEOGRAPHIC AREA FILTERED	1748
CONTROLLING UNIT INDICATOR	1750
ALERT STATUS CHANGE	1751
SPECIAL CODE	1752
THREAT TYPE	1762
ESTIMATED YIELD	1767
TYPE OF BURST	1768
ACTION, COMMUNICATION CONTROL	1769
TRANSMISSION TERMINATION	1770
DESIGNATOR	
ACTION, TIME SLOT ASSIGNMENT	1771
ACCESS DESCRIPTION	1772
COMMUNITY DESIGNATOR	1774
RELAY LEVEL	1775
REPROMULGATION RELAY STATE	1776
CONNECTIVITY MONITOR, ENABLE	1777
REPROMULGATION ORIGINATION	1778
CONTROL	
INITIAL ENTRY INDICATOR	1779
COMMUNICANT STATUS UPDATE	1780
INDICATOR	
INDEX NUMBER	1781
PARTICIPANT INDEX NUMBER	1782
ALLOCATED PG INDEX NUMBER	1783
ALLOCATED ROUTE NUMBER	1784

APPENDIX B

TABLE B-2. NUMERICAL LIST OF DATA FIELD IDENTIFIERS (DFIS)

SHEET 10

DFI NAME	DFI NO.
NET CONTROL STATION STATUS	1786
RESPONSE TIME	1787
ASSIGN/DEASSIGN INDICATOR	1788
NEEDLINE PG, STATUS	1789
NEEDLINE PG STATUS AMPLIFY	1790
TEST DURATION COUNT	1791
ASSIGN/DEASSIGN UNIT DESIGNATOR	1792
UNIT DESIGNATOR	1793
PLATFORM	1797
PLATFORM ACTIVITY	1798
PLATFORM TYPE	1802
EW COORDINATION	1803
SECTOR WIDTH	1804
SECTOR/AREA/LOCATION INDICATOR	1805
AXIS ORIENTATION	1806
PERIODICITY OF REPORT	1808
REQUEST NUMBER	1809
BEARING ORIGIN	1811
SOURCE	1812
PRIORITY	1816
RADIATION STATUS INDICATOR	1818
FREQUENCY/FREQUENCY RANGE INDICATOR	1819
FREQUENCY SCALE INDICATOR	1820
WARTIME RESERVE MODE INDICATOR	1821
EMISSION CONTROL PLAN	1822
PLAN MODIFICATION	1824
RADIATION RESTRICTION	1825
CHANGE RADIATION FACTOR	1826
CIRCUIT	1827
AUTOMATIC EA NEGATION	1833
TIME SHARING IMPLEMENTATION	1834
PLAN SOURCE	1836
IMMEDIATE ACTION INDICATOR	1839
TIME DURATION	1840
EMITTER FUNCTION	1843
DECOY MISSION	1847
DECOY TYPE	1848
MODULATION CODE	1849

APPENDIX B

TABLE B-2. NUMERICAL LIST OF DATA FIELD IDENTIFIERS (DFIS)

SHEET 11

DFI NAME	DFI NO.
CALLSIGN	1850
CHARACTER	1851
ELEVATION ANGLE/ALTITUDE INDICATOR	1852
IDENTITY DIFFERENCE INDICATOR	1860
SPECIAL INTEREST INDICATOR	1861
CORRELATION INDICATOR	1862
POINTER	1863
ORIGIN OF INDEX NUMBER	1864
AIRFIELD STATUS	1865
AIR RAID STATE	1866
NUCLEAR/BIOLOGICAL/CHEMICAL CONTAMINATION	1867
ICAO CODE	1868
BASE WEATHER STATE	1869
AVAILABLE SUPPORT INDICATORS	1870
SHORADEZ	1871
MUNITIONS AVAILABILITY	1872
RUNWAY/FLIGHT DECK EQUIPMENT	1873
RUNWAY STATUS	1874
RUNWAY AVAILABLE LENGTH	1875
RUNWAY BRAKING ACTION	1886
WIND SHEAR	1887
RUNWAY INDICATOR	1888
DIVE ANGLE	1890
NUMBER OF AIRCRAFT	1898
MISSION COMMANDER INDICATOR	1901
PULSE REPETITION INTERVAL	1903
TRACKING MODIFIER	1906
ROAD NUMBER	1916
ID/STRENGTH INDICATOR	1926
JAMMER TYPE	1933
RECCE/EW SYSTEM TYPE	1934
DISSEMINATION MODE INDICATOR	1936
RADAR PRF	1943
TABLE ENTRY	1946
SENSOR TYPE	1953
DEMAND	1956
FREQUENCY EXPONENT	1963
RECEIVE COUNT	1966

TABLE B-2. NUMERICAL LIST OF DATA FIELD IDENTIFIERS (DFIS)

SHEET 12

DFI NAME	DFI NO.
LAUNCH CAPABILITY	1973
HOP COUNT	1976
TIME TAG	1986

APPENDIX B

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 1

DFI	DUI
NO.	NO.
20	019
27	020
2D	021
30	021
3D	022
ABSOLUTE VALUE OF COVARIANCE	001
DATA ELEMENT 12	
ABSOLUTE VALUE OF COVARIANCE	002
DATA ELEMENT 13	
ABSOLUTE VALUE OF COVARIANCE	003
DATA ELEMENT 14	
ABSOLUTE VALUE OF COVARIANCE	004
DATA ELEMENT 15	
ABSOLUTE VALUE OF COVARIANCE	005
DATA ELEMENT 16	
ABSOLUTE VALUE OF COVARIANCE	006
DATA ELEMENT 23	
ABSOLUTE VALUE OF COVARIANCE	007
DATA ELEMENT 24	
ABSOLUTE VALUE OF COVARIANCE	008
DATA ELEMENT 25	
ABSOLUTE VALUE OF COVARIANCE	009
DATA ELEMENT 26	
ABSOLUTE VALUE OF COVARIANCE	010
DATA ELEMENT 34	
ABSOLUTE VALUE OF COVARIANCE	011
DATA ELEMENT 35	
ABSOLUTE VALUE OF COVARIANCE	012
DATA ELEMENT 36	
ABSOLUTE VALUE OF COVARIANCE	013
DATA ELEMENT 45	
ABSOLUTE VALUE OF COVARIANCE	014
DATA ELEMENT 46	
ABSOLUTE VALUE OF COVARIANCE	015
DATA ELEMENT 56	
ABSOLUTE VALUE OF VELOCITY	016
COVARIANCE DATA ELEMENT 23	
ACCESS DESCRIPTION	001
ACCESS RATE, PPLI A	003
ACCESS RATE, PPLI B	004

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 2

DUI NAME	DFI NO.	DUI NO.
ACCESS RATE, RTT-B	1772	002
ACKNOWLEDGEMENT DATA AMPLIFIER	796	001
ACKNOWLEDGEMENT DATA DESIGNATOR	795	001
ACQUISITION RADAR STATUS	1665	013
ACTION CODE	803	002
ACTION CODE, CRYPTOVARIABLE	897	001
ACTION CODE, OVER-THE-AIR REKEYING	876	001
ACTION CODE, TIME SLOT ASSIGNMENT	803	001
ACTION, ASSOCIATION	1606	008
ACTION, COMMUNICATION CONTROL	1769	001
ACTION, CORRELATE	1606	003
ACTION, DATA UPDATE REQUEST	1606	002
ACTION, FILTER MANAGEMENT	1606	007
ACTION, IFF/SIF MANAGEMENT	1606	006
ACTION, POINTER	1606	004
ACTION, TIME SLOT REQUEST	1771	001
ACTION, TRACK MANAGEMENT	1606	001
ACTION/INFORMATION INDICATOR, 4	1740	004
ACTIVE RELAY INDICATOR, CONTROL CHANNEL	1571	004
ACTIVE RELAY INDICATOR, VOICE CHANNEL	1571	003
ACTIVE RELAY INDICATOR, WIDE AREA NETWORK	1571	002
ACTIVE RUNWAY APPROACH LIGHTING	1873	005
ACTIVE RUNWAY ARRESTER BARRIER	1873	009
ACTIVE RUNWAY ARRESTER WIRES	1873	011
ACTIVE RUNWAY AVAILABLE LENGTH	1875	001
ACTIVE RUNWAY BRAKING ACTION	1886	001
ACTIVE RUNWAY DIRECTION	845	002
ACTIVE RUNWAY GCA/FLIGHT DECK PAR	1873	003
ACTIVE RUNWAY ILS/FLIGHT DECK PRECISION APPROACH AID (MADGE)	1873	007
ACTIVE RUNWAY STATUS	1874	001

APPENDIX B

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 3

DFI	DUI
NO.	NO.
ACTIVE RUNWAY VISUAL RANGE	286 001
ACTIVE SONAR	1665 055
ACTIVE SONOBUOY INVENTORY	408 012
ACTIVE SONOBUOY STATUS	1664 009
ACTIVITY AMPLIFICATION INDEX	752 001
ADD/DELETE INDICATOR	777 001
AF PROPRIETARY FORMAT	1743 001
AGILE EMITTER	1502 001
AIM-9L AIR-TO-AIR MISSILE	1872 002
AIM-9M AIR-TO-AIR MISSILE	1872 027
AIM-9P AIR-TO-AIR MISSILE	1872 028
AIR AMBIGUOUS TYPE 1	804 002
AIR AMBIGUOUS TYPE 2	804 003
AIR AMPLIFICATION	601 001
AIR PLATFORM	1797 001
AIR PLATFORM ACTIVITY	1798 001
AIR RAID STATE	1866 001
AIR SPECIFIC TYPE	804 001
AIR SPECIFIC TYPE INDICATOR	267 002
AIR WEAPON/ENGAGEMENT STATUS, A	394 007
AIR WEAPON/ENGAGEMENT STATUS, B	394 005
AIR-GROUND WEAPON DATA LINK CHANNEL	1206 001
AIR-TO-AIR WEAPON RELEASE SYSTEM STATUS	1665 008
AIR-TO-GROUND WEAPON RELEASE SYSTEM STATUS	1665 009
AIRBORNE EARLY WARNING AIRCRAFT	1665 040
AIRBORNE INDICATOR	732 002
AIRCRAFT HANDLING, LAUNCH, AND RECOVERY SYSTEMS	1665 035
AIRCRAFT MODEL	1661 001
AIRFIELD STATUS	1865 001
ALERT STATUS CHANGE	1751 001
ALLOCATED PG INDEX NUMBER	1783 001
ALTITUDE AMPLIFICATION	1682 001
ALTITUDE QUALITY	283 002

APPENDIX B

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 4

DUIS NAME	DFI NO.	DUI NO.
ALTITUDE SOURCE	364	001
ALTITUDE, 100 FT	365	034
ALTITUDE, 100 FT 1	365	035
ALTITUDE, 100 FT 2	365	036
ALTITUDE, 25 FT	365	033
ALTITUDE, ANGLE ORIGIN	365	001
AMBIGUOUS TYPE 1 PROBABILITY	369	003
AMBIGUOUS TYPE 2 PROBABILITY	369	004
AMPLIFICATION CONFIDENCE	358	002
AMPLIFICATION DATA REQUEST INDICATOR	1675	007
AMPLIFYING CHARACTERISTICS	426	003
AMRAAM AIR-TO-AIR MISSILE	1872	007
ANTENNA SCAN PERIOD	1580	005
ANTENNA SCAN RATE	1580	004
ANTENNA SCAN RATE/PERIOD INDICATOR	362	016
ANTI-SUBMARINE DEPTH CHARGE	1872	015
AREA MAJOR AXIS	419	003
AREA MAJOR AXIS, 1	419	005
AREA MAJOR AXIS, 2	419	006
AREA MAJOR AXIS, 3	419	010
AREA MAJOR AXIS, 4	419	001
AREA MINOR AXIS	419	004
AREA MINOR AXIS, 1	419	007
AREA MINOR AXIS, 2	419	008
AREA MINOR AXIS, 3	419	009
AREA MINOR AXIS, 4	419	002
ARM THREAT NUMBER	1207	001
ARM TYPE	1207	002
ASRAAM AIR-TO-AIR MISSILE	1872	008
ASSIGN/DEASSIGN INDICATOR	1788	001
ASSIGN/DEASSIGN UNIT DESIGNATOR	1792	001
ASSUMED FRIEND IDENTITY FILTER INDICATOR	1745	017
ATDL 1 STATUS	1625	006
ATDL-1 TRACK NUMBER	746	002
ATDL-1 TRACK NUMBER APPLICABILITY	299	003

APPENDIX B

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 5

DFI	DUI
NO.	NO.
ATTACK, STRIKE/FIGHTER AIRCRAFT	1665 037
AUDIO	361 001
AUTOMATIC ELECTRONIC ATTACK NEGATION	1833 001
AUTOPILOT CONTROL BIT	705 001
AUTOPILOT STATUS	706 001
AVTUR	1870 005
AXIS ORIENTATION	1806 001
AXIS ORIENTATION, 1	1806 002
AXIS ORIENTATION, 2	1806 003
BAILOUT INDICATOR	1646 001
BALLISTIC MISSILE ACCELERATION	1104 001
BALLISTIC MISSILE BETA	1105 001
BAP 100 AIR-TO-SURFACE MISSILE	1872 010
BASE ACTUAL WEATHER	287 001
BASE ACTUAL WEATHER DESCRIPTOR	287 002
BASE ACTUAL WEATHER INTENSITY/ PROXIMITY	287 003
BASE WEATHER STATE	1869 001
BEACON CODE	1628 001
BEARING	372 007
BEARING 1, ASW	372 021
BEARING 2, ASW	372 022
BEARING ACCURACY	383 006
BEARING ACCURACY, ASW	372 024
BEARING ANGLE RATE	384 001
BEARING ANGLE RATE UNCERTAINTY	353 012
BEARING DRIFT	360 001
BEARING ORIGIN	1811 001
BEARING REPORT TYPE	373 001
BEARING UNCERTAINTY	353 010
BEARING, 1	372 019
BEARING, 2	372 020
BEARING, ASW PLOT	372 023
BEARING, INTERCEPT	372 001
BETA ANGLE	284 001
BIOLOGICAL CONTAMINATION INDICATOR	1867 002
BLOCK SIZE INDICATOR	798 001

APPENDIX B

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 6

DFI	DUI
NO.	NO.
BOOST INDICATOR	1107 003
BROAD CLASSIFICATION	425 003
BROADBAND	374 001
CALLSIGN, OBSERVED	1850 001
CALLSIGN, PUBLISHED	1850 002
CANCELLATION INDICATOR	390 003
CHANGE RADIATION FACTOR	1826 001
CHANNEL NUMBER, SONOBUOY RF	420 008
CHARACTER #1	1851 001
CHARACTER #10	1851 010
CHARACTER #11	1851 011
CHARACTER #12	1851 012
CHARACTER #13	1851 013
CHARACTER #14	1851 014
CHARACTER #15	1851 015
CHARACTER #16	1851 016
CHARACTER #17	1851 017
CHARACTER #18	1851 018
CHARACTER #19	1851 019
CHARACTER #2	1851 002
CHARACTER #20	1851 020
CHARACTER #3	1851 003
CHARACTER #4	1851 004
CHARACTER #5	1851 005
CHARACTER #6	1851 006
CHARACTER #7	1851 007
CHARACTER #8	1851 008
CHARACTER #9	1851 009
CHEMICAL CONTAMINATION INDICATOR	1867 003
CIRCUIT	1827 001
CLOUD COVER, 1	775 003
CLOUD COVER, 2	775 004
CLOUD COVER, 3	775 005
CLOUD HEIGHT, 1	365 025
CLOUD HEIGHT, 2	365 026
CLOUD HEIGHT, 3	365 027
COLD INVENTORY	408 014
COMMAND	398 003
COMMAND AND CONTROL INDICATOR	893 001

APPENDIX B

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 7

DUIS NAME	DFI NO.	DUIS NO.
COMMAND AND CONTROL SYSTEM	1665	016
COMMAND MISSION	701	002
COMMUNICANT STATUS UPDATE INDICATOR	1780	001
COMMUNICATION SYSTEM	1665	019
COMMUNICATIONS IMPAIRMENT	1652	001
COMMUNITY DESIGNATOR	1774	001
COMMUNITY DESIGNATOR, INTERCOMMUNITY COMMUNICANT	1774	002
COMPUTER STATUS	1665	044
CONFIDENCE LEVEL	358	001
CONNECT/DISCONNECT	1107	004
CONNECTIVITY INTERROGATION INSTRUCTION	1726	001
CONNECTIVITY MONITOR, ENABLE	1777	001
CONNECTIVITY QUALITY, 1	1725	001
CONNECTIVITY QUALITY, 10	1725	010
CONNECTIVITY QUALITY, 11	1725	011
CONNECTIVITY QUALITY, 2	1725	002
CONNECTIVITY QUALITY, 3	1725	003
CONNECTIVITY QUALITY, 4	1725	004
CONNECTIVITY QUALITY, 5	1725	005
CONNECTIVITY QUALITY, 6	1725	006
CONNECTIVITY QUALITY, 7	1725	007
CONNECTIVITY QUALITY, 8	1725	008
CONNECTIVITY QUALITY, 9	1725	009
CONNECTIVITY QUALITY, INTERCOMMUNITY COMMUNICANT	1725	012
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 1	1725	013
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 10	1725	022
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 100	1725	112
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 101	1725	113
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 102	1725	114
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 103	1725	115

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 8

DUIS NAME	DFI NO.	DUI NO.
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 104	1725	116
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 105	1725	117
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 106	1725	118
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 107	1725	119
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 108	1725	120
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 109	1725	121
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 11	1725	023
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 110	1725	122
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 111	1725	123
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 112	1725	124
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 113	1725	125
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 114	1725	126
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 115	1725	127
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 116	1725	128
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 117	1725	129
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 118	1725	130
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 119	1725	131
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 12	1725	024
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 120	1725	132
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 121	1725	133

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 9

DUIS NAME	DFI NO.	DUIS NO.
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 122	1725	134
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 123	1725	135
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 124	1725	136
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 125	1725	137
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 126	1725	138
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 127	1725	139
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 128	1725	140
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 13	1725	025
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 14	1725	026
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 15	1725	027
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 16	1725	028
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 17	1725	029
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 18	1725	030
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 19	1725	031
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 2	1725	014
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 20	1725	032
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 21	1725	033
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 22	1725	034
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 23	1725	035
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 24	1725	036

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 10

DUIS NAME	DFI NO.	DUIS NO.
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 25	1725	037
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 26	1725	038
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 27	1725	039
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 28	1725	040
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 29	1725	041
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 3	1725	015
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 30	1725	042
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 31	1725	043
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 32	1725	044
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 33	1725	045
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 34	1725	046
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 35	1725	047
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 36	1725	048
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 37	1725	049
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 38	1725	050
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 39	1725	051
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 4	1725	016
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 40	1725	052
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 41	1725	053
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 42	1725	054

APPENDIX B

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 11

DUIS NAME	DFI NO.	DUIS NO.
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 43	1725	055
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 44	1725	056
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 45	1725	057
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 46	1725	058
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 47	1725	059
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 48	1725	060
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 49	1725	061
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 5	1725	017
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 50	1725	062
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 51	1725	063
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 52	1725	064
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 53	1725	065
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 54	1725	066
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 55	1725	067
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 56	1725	068
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 57	1725	069
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 58	1725	070
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 59	1725	071
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 6	1725	018
CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 60	1725	072

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 12

DFI	DUI
NO.	NO.
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 61	1725 073
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 62	1725 074
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 63	1725 075
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 64	1725 076
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 65	1725 077
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 66	1725 078
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 67	1725 079
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 68	1725 080
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 69	1725 081
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 7	1725 019
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 70	1725 082
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 71	1725 083
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 72	1725 084
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 73	1725 085
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 74	1725 086
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 75	1725 087
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 76	1725 088
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 77	1725 089
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 78	1725 090
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 79	1725 091

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 13

DFI	DUI
NO.	NO.
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 8	1725 020
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 80	1725 092
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 81	1725 093
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 82	1725 094
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 83	1725 095
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 84	1725 096
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 85	1725 097
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 86	1725 098
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 87	1725 099
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 88	1725 100
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 89	1725 101
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 9	1725 021
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 90	1725 102
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 91	1725 103
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 92	1725 104
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 93	1725 105
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 94	1725 106
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 95	1725 107
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 96	1725 108
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 97	1725 109

APPENDIX B

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 14

DFI	DUI
NO.	NO.
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 98	1725 110
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 99	1725 111
CONNECTIVITY STATUS INSTRUCTION	1728 001
CONNECTIVITY STATUS LEVEL	1729 001
CONSOLE STATUS	1678 003
CONTINUATION WORD LABEL	1551 001
CONTROL CHANGE INDICATOR	1647 001
CONTROL CHANNEL	348 006
CONTROL POSITIONS	1678 001
CONTROL POSITIONS, 1	1678 002
CONTROLLING UNIT INDICATOR	1750 001
CONTROLLING UNIT STATUS	1670 001
CONVENTIONAL 1000 POUND BOMB	1872 018
CONVENTIONAL 500 POUND BOMB	1872 017
CONVENTIONAL DEPTH BOMB INVENTORY	408 005
CONVENTIONAL MISSILE INVENTORY	408 009
CONVENTIONAL TORPEDO INVENTORY	408 007
CORRELATION INDICATOR, A	1862 002
CORRELATION INDICATOR, B	1862 003
CORRELATION INDICATOR, C	1862 004
CORRELATION INDICATOR, D	1862 005
CORRELATION INDICATOR, E	1862 006
CORRELATION INDICATOR, F	1862 007
CORRELATION INDICATOR, G	1862 008
CORRELATION INDICATOR, TN/IN	1862 001
COURSE	371 015
COVARIANCE DATA ELEMENT 11	1106 001
COVARIANCE DATA ELEMENT 22	1106 002
COVARIANCE DATA ELEMENT 33	1106 003
COVARIANCE DATA ELEMENT 44	1106 004
COVARIANCE DATA ELEMENT 55	1106 005
COVARIANCE DATA ELEMENT 66	1106 006
COVARIANCE INDICATOR	1107 001
CRASH SERVICE	1870 002
CROSS RANGE POSITION UNCERTAINTY	353 002

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 15

DUI NAME	DFI NO.	DUI NO.
CRUISE MISSILES	1665	031
CRYPTOMODE INDICATOR	802	001
CRYPTOMODE INDICATOR, RELAY	802	002
CRYPTOPERIOD DESIGNATOR, CURRENT	1546	009
CRYPTOPERIOD DESIGNATOR, LOCATION 0	1546	001
CRYPTOPERIOD DESIGNATOR, LOCATION 1	1546	002
CRYPTOPERIOD DESIGNATOR, LOCATION 2	1546	003
CRYPTOPERIOD DESIGNATOR, LOCATION 3	1546	004
CRYPTOPERIOD DESIGNATOR, LOCATION 4	1546	005
CRYPTOPERIOD DESIGNATOR, LOCATION 5	1546	006
CRYPTOPERIOD DESIGNATOR, LOCATION 6	1546	007
CRYPTOPERIOD DESIGNATOR, LOCATION 7	1546	008
CRYPTOPERIOD DESIGNATOR, REKEY	1546	010
CRYPTOPERIOD DESIGNATOR, SYNCHRONIZATION	1546	011
CRYPTOPERIOD INDICATOR, REQUEST	875	002
CRYPTOSTATUS INFORMATION CODE	1549	001
CRYPTOVARIABLE LOGICAL LABEL A, TRANSEC	801	007
CRYPTOVARIABLE LOGICAL LABEL B, TRANSEC	801	008
CRYPTOVARIABLE LOGICAL LABEL C, MSEC	801	009
CRYPTOVARIABLE LOGICAL LABEL D, MSEC	801	010
CRYPTOVARIABLE LOGICAL LABEL LOCATION, 0	801	011
CRYPTOVARIABLE LOGICAL LABEL LOCATION, 1	801	012

APPENDIX B

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 16

DFI	DUI
NO.	NO.
CRYPTOVARIABLE LOGICAL LABEL	801 013
LOCATION, 2	
CRYPTOVARIABLE LOGICAL LABEL	801 014
LOCATION, 3	
CRYPTOVARIABLE LOGICAL LABEL	801 015
LOCATION, 4	
CRYPTOVARIABLE LOGICAL LABEL	801 016
LOCATION, 5	
CRYPTOVARIABLE LOGICAL LABEL	801 017
LOCATION, 6	
CRYPTOVARIABLE LOGICAL LABEL	801 018
LOCATION, 7	
CRYPTOVARIABLE LOGICAL LABEL	801 019
NUMBER ONE	
CRYPTOVARIABLE LOGICAL LABEL	801 002
NUMBER ONE, RELAY	
CRYPTOVARIABLE LOGICAL LABEL	801 020
NUMBER TWO	
CRYPTOVARIABLE LOGICAL LABEL	801 003
NUMBER TWO, RELAY	
CRYPTOVARIABLE LOGICAL LABEL	801 005
SYNCHRONIZATION	
CRYPTOVARIABLE LOGICAL LABEL,	801 006
MSEC INITIALIZATION	
CRYPTOVARIABLE LOGICAL LABEL,	801 004
REKEY	
CRYPTOVARIABLE LOGICAL LABEL,	801 001
REQUEST	
CRYPTOVARIABLE SYNCHRONIZATION	887 001
BITS	
CRYPTOVARIABLE, PART I	885 001
CRYPTOVARIABLE, PART II	885 002
CRYPTOVARIABLE, PART III	885 003
DATA INDICATOR	1107 005
DATA LINK AND DISPLAY SYSTEM	1665 017
DATA REPORT TYPE	357 001
DATUM ERROR	1568 001
DECOY EA STATUS	272 016
DECOY MISSION	1847 001
DECOY TYPE	1848 001

APPENDIX B

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 17

DFI	DUI
NO.	NO.
DUI NAME	
DECOY, CHAFF	272 014
DECOY, IR	272 015
DEFENSIVE JAMMER SYSTEM 1	1665 050
STATUS	
DEFENSIVE JAMMER SYSTEM 1 TYPE	1934 002
DEFENSIVE JAMMER SYSTEM 2	1665 051
STATUS	
DEFENSIVE JAMMER SYSTEM 2 TYPE	1934 003
DELTA ELEVATION	1660 001
DELTA EPOCH	1615 006
DELTA EPOCH, 1	1615 002
DELTA EPOCH, 2	1615 003
DELTA EPOCH, 3	1615 004
DELTA EPOCH, 4	1615 005
DELTA LATITUDE, 0.0313 MINUTE	289 003
1	
DELTA LATITUDE, 0.0313 MINUTE	289 004
2	
DELTA LONGITUDE, 0.0313 MINUTE	290 003
1	
DELTA LONGITUDE, 0.0313 MINUTE	290 004
2	
DEMAND, A	1956 002
DEMAND, B	1956 003
DEMAND, C	1956 004
DEMAND, D	1956 005
DEMAND, E	1956 006
DEMAND, OWN	1956 001
DEPTH CATEGORY	366 009
DEPTH CONTACT	366 014
DEPTH INDICATOR (SONOBUOY)	366 012
DEPTH QUALITY	283 004
DEPTH, 15 METERS	366 008
DEPTH, ABOVE/BELOW LAYER	366 010
(SENSOR)	
DEPTH, SENSOR	366 011
DEPTH, TRANSDUCER (SONOBUOY)	366 013
DESIGNATED FLYING COURSE	371 016
DIFAR/CODAR STATUS	1664 008
DISPLACED POSITION INDICATOR	1619 001

APPENDIX B

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 18

DFI NO.	DUI NO.
DISSEMINATION MODE INDICATOR, A	1936 002
DISSEMINATION MODE INDICATOR, OWN	1936 001
DISSEMINATION MODE INDICATOR, WORD	1936 003
DISUSED	758 046
DISUSED	758 066
DISUSED	758 001
DISUSED	758 002
DISUSED	758 003
DISUSED	758 004
DISUSED	758 005
DISUSED	758 006
DISUSED	758 007
DISUSED	758 008
DISUSED	758 009
DISUSED	758 010
DISUSED	758 011
DISUSED	758 012
DISUSED	758 013
DISUSED	758 014
DISUSED	758 015
DISUSED	758 016
DISUSED	758 017
DISUSED	758 018
DISUSED	758 019
DISUSED	758 020
DISUSED	758 021
DISUSED	758 022
DISUSED	758 023
DISUSED	758 024
DISUSED	758 025
DISUSED	758 026
DISUSED	758 027
DISUSED	758 028
DISUSED	758 029
DISUSED	758 030
DISUSED	758 031
DISUSED	758 032

APPENDIX B

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 19

DFI	DUI
NO.	NO.
DISUSED	758 033
DISUSED	758 034
DISUSED	758 035
DISUSED	758 036
DISUSED	758 037
DISUSED	758 038
DISUSED	758 039
DISUSED	758 040
DISUSED	758 041
DISUSED	758 042
DISUSED	758 043
DISUSED	758 044
DISUSED	758 045
DISUSED	758 047
DISUSED	758 048
DISUSED	758 049
DISUSED	758 050
DISUSED	758 051
DISUSED	758 052
DISUSED	758 053
DISUSED	758 054
DISUSED	758 055
DISUSED	758 056
DISUSED	758 057
DISUSED	758 058
DISUSED	758 059
DISUSED	758 060
DISUSED	758 061
DISUSED	758 062
DISUSED	758 063
DISUSED	758 064
DISUSED	758 065
DISUSED	758 067
DISUSED	758 068
DIVE ANGLE	1890 001
DOPPLER	370 001
DROP DISCRETE	704 004
DURANDAL AIR-TO-SURFACE MISSILE	1872 009
DUTY ASSIGNMENT	702 002

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 20

DFI NO.	DUI NO.
DUTY ASSIGNMENT FUNCTIONAL AREA	501 001
EA FREQUENCY BAND A	272 001
EA FREQUENCY BAND B	272 002
EA FREQUENCY BAND C	272 003
EA FREQUENCY BAND D	272 004
EA FREQUENCY BAND E	272 005
EA FREQUENCY BAND F	272 006
EA FREQUENCY BAND G	272 007
EA FREQUENCY BAND H	272 008
EA FREQUENCY BAND I	272 009
EA FREQUENCY BAND J	272 010
EA FREQUENCY BAND K	272 011
EA FREQUENCY BAND L	272 012
EA FREQUENCY BAND M	272 013
EFFECTIVE FROM HOUR	792 002
EFFECTIVE FROM MINUTE	797 001
EGRESS HEADING	371 009
ELECTRONIC ATTACK	1665 026
ELECTRONIC ATTACK DATA REQUEST INDICATOR	1675 003
ELECTRONIC SUPPORT AIRCRAFT	1665 041
ELECTRONIC WARFARE ACTION VALUE	1803 001
ELECTRONIC WARFARE COORDINATOR INDICATOR	368 001
ELECTRONIC WARFARE FILTER INDICATOR	1745 013
ELECTRONIC WARFARE FIXES DATA REQUEST INDICATOR	1675 009
ELECTRONIC WARFARE SUPPORT AND OTHER ELECTRONIC ATTACK	1665 027
ELECTRONIC WARFARE SUPPORT, STATUS	1664 002
ELEVATION ANGLE	428 002
ELEVATION ANGLE RATE	384 002
ELEVATION ANGLE RATE UNCERTAINTY	353 013
ELEVATION ANGLE, 2	428 003

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 21	
DFI	DUI
DUI NAME	NO. NO.
ELEVATION ANGLE/ALTITUDE INDICATOR	1852 001
ELEVATION QUALITY	283 003
ELEVATION UNCERTAINTY	353 011
ELEVATION, 25 FT	1612 001
ELEVATION, 25 FT, 1	1612 002
ELEVATION, LSBS	1612 003
EMBARKED ASSAULT CRAFT	1665 032
EMERGENCY INDICATOR	355 002
EMERGENCY TYPE	1641 001
EMISSION CONTROL PLAN	1822 001
EMITTER CONFIDENCE	431 003
EMITTER FUNCTION	1843 001
EMITTER NUMBER	422 001
EMITTER NUMBER INDICATOR	266 001
EMITTER PRF	440 001
EMITTER STATUS	342 001
END OF TARGET REPORTING CYCLE	312 001
END POINT, 1	1645 002
END POINT, 2	1645 003
ENERGY GENERATION SYSTEM-CONVENTIONAL	1665 034
ENERGY GENERATION SYSTEM-NUCLEAR	1665 033
ENGAGEMENT COORDINATION ACTION VALUE	1075 001
ENV/CAT AIR FILTER INDICATOR	1745 003
ENV/CAT LAND (GROUND) POINT FILTER INDICATOR	1745 006
ENV/CAT LAND (GROUND) TRACK FILTER INDICATOR	1745 007
ENV/CAT SPACE FILTER INDICATOR	1745 002
ENV/CAT SUBSURFACE (MARITIME) FILTER INDICATOR	1745 005
ENV/CAT SURFACE (MARITIME) FILTER INDICATOR	1745 004
ENV/CAT UNKNOWN FILTER INDICATOR	1745 001
ENVIRONMENT/CATEGORY	275 004
EPOCH COUNT CURRENT	448 002

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 22

DFI	DUI
NO.	NO.
EPOCH NUMBER, DELTA CHANGE	1615 007
EPOCH NUMBER, EXECUTION	1539 001
EPOCH SUBDIVISION	755 001
EPOCH SUBDIVISION, EXECUTION	755 002
ES DATA REQUEST INDICATOR	1675 004
ES FREQUENCY BAND A	268 001
ES FREQUENCY BAND B	268 002
ES FREQUENCY BAND C	268 003
ES FREQUENCY BAND D	268 004
ES FREQUENCY BAND E	268 005
ES FREQUENCY BAND F	268 006
ES FREQUENCY BAND G	268 007
ES FREQUENCY BAND H	268 008
ES FREQUENCY BAND I	268 009
ES FREQUENCY BAND J	268 010
ES FREQUENCY BAND K	268 011
ES FREQUENCY BAND L	268 012
ES FREQUENCY BAND M	268 013
ESTIMATED YIELD	1767 001
EVENT DURATION, HUNDREDTHS	380 006
EVENT DURATION, SECONDS	380 005
EXECUTE HOURS	792 007
EXECUTE MINUTES	797 007
EXERCISE INDICATOR	385 003
FIGHTER AIRCRAFT	1665 036
FILTER DATA REQUEST INDICATOR	1675 008
FILTER NUMBER	1747 001
FILTER UNIT TYPE	1520 001
FIRE CONTROL SYSTEM	1665 054
FIX OR BEARING DESCRIPTOR	382 004
FIXED WING ANTI-SUBMARINE WARFARE AIRCRAFT	1665 038
FLIGHT DECK GLIDE PATH INDICATOR	1873 013
FLIGHT DECK STATUS	878 001
FLIGHT LEADER INDICATOR	730 001
FORCE TELL INDICATOR	354 002
FREQUENCY AGILITY INDICATOR	1203 001
FREQUENCY EXPONENT	1963 001
FREQUENCY MULTIPLIER, 1	1820 003

APPENDIX B

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 23

DUI NAME	DFI NO.	DUI NO.
FREQUENCY MULTIPLIER, 2	1820	004
FREQUENCY, 1	417	006
FREQUENCY, 2	417	007
FREQUENCY, ASSOCIATED ACOUSTIC 1	417	021
FREQUENCY, ASSOCIATED ACOUSTIC 2	417	022
FREQUENCY, INTERCEPT	417	001
FREQUENCY, SOURCE ACOUSTIC	417	020
FREQUENCY/FREQUENCY RANGE INDICATOR	1819	001
FRIEND IDENTITY FILTER INDICATOR	1745	018
FUEL	409	003
FUEL FUNCTION	806	001
FUEL, SURFACE (MARITIME)	409	001
FUSION TYPE	1301	001
FUTURE EVENT DESCRIPTOR	857	001
GEODETTIC POSITION QUALITY	283	001
GEOGRAPHIC AREA FILTERED	1748	001
GLOBAL POSITIONING SUBSYSTEM STATUS	1665	048
GUN CAPABLE	1624	001
GUN FIRE CONTROL SYSTEM	1665	028
GUNS	1665	029
HANDOVER INDICATOR	325	001
HARPOON WEAPON CONTROL SYSTEM	1665	059
HELICOPTER ANTI-SUBMARINE WARFARE AIRCRAFT	1665	039
HELICOPTER SUPPORT AIRCRAFT	1665	043
HF DIRECTION FINDER	268	014
HOLDING CONTACT	356	001
HOP COUNT, A	1976	001
HOP COUNT, B	1976	002
HOP COUNT, C	1976	003
HOP COUNT, D	1976	004
HOP COUNT, E	1976	005
HOSTILE IDENTITY FILTER INDICATOR	1745	021
HOT INVENTORY	408	015

APPENDIX B

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 24

DFI	DUI
NO.	NO.
HOUR	792 001
HULL MOUNTED PASSIVE SONAR	1665 056
HUNDREDTHS	380 002
ICAO CODE	1868 001
ID/STRENGTH INDICATOR	1926 001
IDENTITY	376 007
IDENTITY AMPLIFYING DESCRIPTOR	376 001
IDENTITY CONFIDENCE	1663 001
IDENTITY DIFFERENCE INDICATOR	1860 001
IDENTITY, EVALUATED	376 002
IFF/SIF INTERROGATOR AND TRANSPONDER SYSTEM	1665 024
IFF/SIF INTERROGATOR STATUS	1665 004
IFF/SIF TRANSPONDER STATUS	1665 003
IJMS STATUS	1625 007
IJMS, SYSTEM REFERENCE NUMBER	352 001
IJMS, SYSTEM REFERENCE NUMBER APPLICABILITY	299 004
ILLUMINATING RADAR STATUS	1665 014
IMMEDIATE ACTION INDICATOR	1839 001
INDEX NUMBER	768 002
INDEX NUMBER, A	768 003
INDEX NUMBER, B	768 004
INDEX NUMBER, C	768 005
INDEX NUMBER, D	768 006
INDEX NUMBER, E	768 007
INDEX NUMBER, F	768 008
INDEX NUMBER, G	768 009
INDEX NUMBER, NEW SET	1781 002
INDEX NUMBER, RELATED	768 010
INDEX NUMBER, SET	1781 001
INDEX NUMBER, THIRD PARTY	768 001
INFRARED STATUS	1665 002
INFRARED STATUS INDICATOR	1664 003
INITIAL ENTRY INDICATOR	1779 001
IRIP, ROUTE 1	1735 001
IRIP, ROUTE 10	1735 010
IRIP, ROUTE 11	1735 011
IRIP, ROUTE 12	1735 012
IRIP, ROUTE 13	1735 013

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 25

DFI	DUI
NO.	NO.
IRIP, ROUTE 14	1735 014
IRIP, ROUTE 15	1735 015
IRIP, ROUTE 2	1735 002
IRIP, ROUTE 3	1735 003
IRIP, ROUTE 4	1735 004
IRIP, ROUTE 5	1735 005
IRIP, ROUTE 6	1735 006
IRIP, ROUTE 7	1735 007
IRIP, ROUTE 8	1735 008
IRIP, ROUTE 9	1735 009
JAMMER RECEIVED SIGNAL LEVEL	427 001
JAMMER TYPE	1933 001
JITTER	432 001
LABEL, J-SERIES	270 004
LABEL, J-SERIES REQUEST	270 007
LAND (GROUND) AMBIGUOUS TYPE 1	810 002
LAND (GROUND) AMBIGUOUS TYPE 2	810 003
LAND (GROUND) AMPLIFICATION	601 004
LAND (GROUND) PLATFORM	1797 004
LAND (GROUND) PLATFORM	1798 004
ACTIVITY	
LAND (GROUND) SPECIFIC TYPE	810 001
LAND (GROUND) SPECIFIC TYPE	267 001
INDICATOR	
LANDING APPROACH CONDITION	1545 001
LASER ILLUMINATOR CODE	1676 001
LASER SPOT TRACKER SUBSYSTEM	1665 047
STATUS	
LASER STATUS	1665 005
LATERAL CONTROL COMMAND	707 002
LATERAL ERROR	708 004
LATITUDE, 0.0013 MINUTE	281 015
LATITUDE, 0.0051 MINUTE	281 014
LATITUDE, 0.0103 MINUTE	281 017
LATITUDE, 0.0412 MINUTE	281 016
LATITUDE, LSB	281 001
LATITUDE, LSBS	281 002
LAUNCH CAPABILITY	1973 001
LINE/AREA CONTINUATION	1720 001
INDICATOR	

SHEET 26

DUI NAME	DFI NO.	DUI NO.
LINE/AREA CONTINUATION	1720	002
INDICATOR, 1		
LINK 11 STATUS	1625	003
LINK 11/LINK 11B TRACK NUMBER	269	016
LINK 11/LINK 11B TRACK NUMBER	299	000
APPLICABILITY		
LINK 11B STATUS	1625	004
LINK 14 STATUS	1625	002
LINK 16 CONTROL STATUS	1625	009
LINK 16 STATUS	1625	005
LINK 4 STATUS	1625	008
LINK 4A ADDRESS	291	001
LINK 4A ADDRESS INDICATOR	1718	001
LINK 4A CONTROL STATUS	1625	010
LINK 4A FREQUENCY	417	017
LINK 4C STATUS	1625	011
LIQUID OXYGEN	1870	004
LOCAL DISCRETE IDENTIFIER	754	001
LOCK-ON	429	001
LONGITUDE, 0.0013 MINUTE	282	015
LONGITUDE, 0.0051 MINUTE	282	014
LONGITUDE, 0.0103 MINUTE	282	013
LONGITUDE, 0.0412 MINUTE	282	012
LONGITUDE, LSB	282	001
LONGITUDE, LSBs	282	002
LORAN FILTER SETTING	771	001
LOST TRACK INDICATOR	1107	002
LOW FREQUENCY ANALYSIS AND	1664	004
RECORDING STATUS		
LOW LIGHT LEVEL TELEVISION	1664	007
STATUS		
MAGIC I AIR-TO-AIR MISSILE	1872	022
MAGIC II AIR-TO-AIR MISSILE	1872	023
MAGNETIC ANOMALY DETECTOR	1664	005
STATUS		
MAXIMUM CONNECTIVITY QUALITY	1725	142
PROVIDED		
MEMORY LOCATION, REKEY	866	003
MEMORY LOCATION, REQUEST	866	004
MERGED MEASUREMENT INDICATOR	325	002

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 27

DUIS NAME	DFI NO.	DUI NO.
MESSAGE COUNT	800	003
MESSAGE LENGTH INDICATOR	800	001
MESSAGE NUMBER	800	002
MESSAGE RECEIVED INDICATOR	1541	001
METHOD OF FIRE	1050	001
MICA AIR-TO-AIR MISSILE	1872	026
MINIMUM CONNECTIVITY QUALITY REQUESTED	1725	141
MINUTE	797	004
MISSILE CHANNEL	852	002
MISSILE TYPE, 1	399	004
MISSILE TYPE, 10	399	013
MISSILE TYPE, 11	399	014
MISSILE TYPE, 12	399	015
MISSILE TYPE, 2	399	005
MISSILE TYPE, 3	399	006
MISSILE TYPE, 4	399	007
MISSILE TYPE, 5	399	008
MISSILE TYPE, 6	399	009
MISSILE TYPE, 7	399	010
MISSILE TYPE, 8	399	011
MISSILE TYPE, 9	399	012
MISSILE WARNING SYSTEM STATUS	1665	045
MISSILE, ROCKET, AND LAUNCHERS	1665	030
MISSION ASSIGNMENT DISCRETE	1626	001
MISSION COMMANDER INDICATOR	1901	001
MISSION CORRELATOR	725	003
MISSION CORRELATOR CHANGE	1669	001
MISSION CORRELATOR, NEW	725	004
MODE I CODE	293	003
MODE I CODE APPLICABILITY	1610	001
MODE II CODE	294	002
MODE II CODE APPLICABILITY	1610	002
MODE III CODE	295	002
MODE III CODE APPLICABILITY	1610	003
MODE III CODE, 1	295	003
MODE III IFF INTERROGATION	815	001
MODE IV INDICATOR	298	001
MODE IV INDICATOR APPLICABILITY	1610	004

APPENDIX B

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 28

DFI	DUI
NO.	NO.
MODE IV INTERROGATOR STATUS	1665 015
MODE NUMBER	430 001
MODE OF DELIVERY	1658 001
MODULATION CODE	1849 001
MULTIPLE EVALUATION	423 001
NATIONALITY/ALLIANCE OF TRACK	748 001
NATO LINK 1 STATUS	1625 001
NATO LINK 1 TRACK NUMBER	747 001
NATO LINK 1 TRACK NUMBER APPLICABILITY	299 002
NAVIGATION SYSTEM	1665 018
NDB	1872 016
NEEDLINE PARTICIPATION GROUP STATUS AMPLIFY, 1	1790 001
NEEDLINE PARTICIPATION GROUP STATUS AMPLIFY, 2	1790 002
NEEDLINE PARTICIPATION GROUP STATUS, 1	1789 001
NEEDLINE PARTICIPATION GROUP STATUS, 2	1789 002
NET CONTROL MESSAGE SEQUENCE NUMBER	1542 001
NET NUMBER	348 001
NET NUMBER, 1	348 013
NET NUMBER, 2	348 014
NET NUMBER, 3	348 008
NET NUMBER, 4	348 015
NET NUMBER, 5	348 016
NET NUMBER, 6	348 017
NET NUMBER, 7	348 023
NET NUMBER, CONTROL NET ENTRY	348 020
NET NUMBER, DECRYPTION	348 022
NET NUMBER, DEFAULT	348 010
NET NUMBER, NET STATUS PARTICIPATION GROUP	348 011
NET NUMBER, NONC2 JU-TO-NONC2 JU NPG A	348 002
NET NUMBER, NONC2 JU-TO-NONC2 JU NPG B	348 003
NET NUMBER, ORIGINAL NET	348 012

APPENDIX B

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 29

DFI	DUI
NO.	NO.
NET NUMBER, RECEIVE	348 004
NET NUMBER, RELAY	348 007
NET NUMBER, SPECIFIED	348 021
NET NUMBER, TRANSMIT	348 005
NETWORK PARTICIPATION STATUS INDICATOR	1613 001
NEUTRAL IDENTITY FILTER INDICATOR	1745 019
NITROGEN	1870 003
NONC2 JU-TO-NONC2 JU NPG STATUS A	1625 012
NONC2 JU-TO-NONC2 JU NPG STATUS B	1625 013
NUCLEAR CONTAMINATION INDICATOR	1867 001
NUMBER OF AIRCRAFT	1898 001
NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 1	396 001
NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 10	396 010
NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 11	396 011
NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 12	396 012
NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 2	396 002
NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 3	396 003
NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 4	396 004
NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 5	396 005
NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 6	396 006
NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 7	396 007
NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 8	396 008
NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 9	396 009

SHEET 30

DUI NAME	DFI NO.	DUI NO.
NUMBER OF MISSILES	1599	001
NUMBER OF STORES	408	036
NUMBER OF STORES, 1	408	032
NUMBER OF STORES, 2	408	033
NUMBER OF STORES, 3	408	034
NUMBER OF STORES, 4	408	035
NUMBER OF STORES, 5	408	040
NUMBER OF STORES, 6	408	041
NUMBER OF STORES, 7	408	042
NUMBER OF STORES, 8	408	043
NUMBER/FREQUENCY OF UPDATES	1111	001
OBSERVER VELOCITY DOWN	1401	003
OBSERVER VELOCITY EAST	1401	002
OBSERVER VELOCITY NORTH	1401	001
OFFSET, VOICE B	843	005
OPERATIONAL CAPABILITY	753	002
OPERATIONAL CAPABILITY, AIRCRAFT	753	003
OPERATIONAL IMPAIRMENT	1600	001
OPERATIONAL MISSILE INVENTORY, 1	408	037
OPERATIONAL MISSILE INVENTORY, 10	408	050
OPERATIONAL MISSILE INVENTORY, 11	408	051
OPERATIONAL MISSILE INVENTORY, 12	408	052
OPERATIONAL MISSILE INVENTORY, 2	408	038
OPERATIONAL MISSILE INVENTORY, 3	408	039
OPERATIONAL MISSILE INVENTORY, 4	408	044
OPERATIONAL MISSILE INVENTORY, 5	408	045
OPERATIONAL MISSILE INVENTORY, 6	408	046
OPERATIONAL MISSILE INVENTORY, 7	408	047

APPENDIX B

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 31

DUI NAME	DFI NO.	DUI NO.
OPERATIONAL MISSILE INVENTORY, 8	408	048
OPERATIONAL MISSILE INVENTORY, 9	408	049
OPERATIONAL STATUS	753	001
ORIGIN OF INDEX NUMBER	1864	001
ORIGINATOR ENVIRONMENT/ CATEGORY	275	001
OVERALL RECURRENCE RATE, NET STATUS PARTICIPATION GROUP	444	023
OWN NET CONTROL STATION STATUS	1786	001
PAIRING ACTION	400	002
PARAMETER SOURCE	1812	001
PARTICIPANT INDEX NUMBER	1782	001
PARTICIPATION GROUP	838	004
PARTICIPATION GROUP RELAY	896	001
ASSIGNMENT INDICATOR		
PARTICIPATION GROUP, 1	838	002
PARTICIPATION GROUP, 2	838	003
PARTICIPATION GROUP, 3	838	005
PARTICIPATION GROUP, 4	838	006
PASSIVE SONOBUOY INVENTORY	408	013
PASSIVE/ACTIVE INDICATOR	892	001
PATH QUALITY MONITORING	1540	001
PATH QUALITY THRESHOLD, 1	1540	002
PATH QUALITY THRESHOLD, 2	1540	003
PDI INDICATOR	1204	001
PDI/MISSILE DATA LINK CHANNEL	1204	002
PENDING IDENTITY FILTER	1745	015
INDICATOR		
PERIMETER ENGAGEMENT STATUS	395	001
PERIODIC REPORT INDICATOR	549	001
PERIODICITY OF REPORT	1808	001
PERSONNEL INVOLVED	1643	001
PLAN MODIFICATION	1824	001
PLAN SOURCE	1836	001
PLATFORM EVALUATION CONFIDENCE	431	004
PLATFORM TYPE	1802	001
POINT AMPLIFICATION	379	002
POINT NUMBER	1657	001

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 32

DUI NAME	DFI NO.	DUI NO.
POINT TYPE	363	003
POINT TYPE, 1	363	004
POINT/LINE/AREA DESCRIPTOR, 1	1554	002
POINT/TRACK INDICATOR	378	001
POINTER	1863	001
POLARIZATION	434	001
POSITION ACCURACY	1642	001
PPLI IFF/SIF INDICATOR	839	002
PPLI TRACK NUMBER AND IDENTITY INDICATOR	839	001
PRECISION AIRCRAFT DIRECTION DISCRETE	1721	001
PRECISION APPROACH RADAR	1665	023
PRF/PRI INDICATOR	362	015
PRIMARY SURVEILLANCE RADAR STATUS	1665	010
PRIORITY	1816	002
PROBABILITY OF ENEMY FORCES	369	002
PROBABILITY OF KILL	1001	001
PROBABILITY OF OWN FORCES	369	001
PROPRIETARY INFORMATION	1744	001
PULSE REPETITION FREQUENCY	440	006
PULSE REPETITION INTERVAL	1903	001
PULSE WIDTH	435	006
QFE	789	002
QNH	789	001
RADAR CHANNEL	852	001
RADAR CHANNEL INDICATOR	828	001
RADAR PRF	1943	001
RADAR STATUS	1665	001
RADAR STATUS INDICATOR	1664	001
RADAR WARNING AND RECEIVING STATUS	1665	007
RADAR WATCH ALTITUDE	365	037
RADIATION RESTRICTION	1825	001
RADIATION STATUS INDICATOR	1818	001
RADIO STATUS, 1	1666	002
RADIO STATUS, 2	1666	003
RADIO STATUS, 3	1666	004
RADIO TYPE	1648	001

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 33

DFI	DUI
NO.	NO.
DUI NAME	
RADIO TYPE, 1	1648 002
RADIO TYPE, 2	1648 003
RADIO TYPE, 3	1648 004
RANGE	757 016
RANGE ACCURACY, ASW	375 001
RANGE RATE	384 003
RANGE RATE UNCERTAINTY	353 015
RANGE UNCERTAINTY	353 014
RANGE, 1	757 001
REALLOCATION POOL NUMBER	1616 001
RECCE SYSTEM STATUS	1665 049
RECCE SYSTEM TYPE	1934 001
RECEIPT/COMPLIANCE	392 008
RECEIVE COUNT, A	1966 002
RECEIVE COUNT, B	1966 003
RECEIVE COUNT, C	1966 004
RECEIVE COUNT, D	1966 005
RECEIVE COUNT, E	1966 006
RECEIVE COUNT, OWN	1966 001
RECORDER STATUS, 1	1664 010
RECORDER STATUS, 2	1664 011
RECORDER STATUS, 3	1664 012
RECORDER STATUS, 4	1664 013
RECURRENCE RATE	444 001
RECURRENCE RATE INDICATOR	444 013
RECURRENCE RATE, 1	444 002
RECURRENCE RATE, 2	444 003
RECURRENCE RATE, 3	444 005
RECURRENCE RATE, 4	444 004
RECURRENCE RATE, CONTROL	444 019
RECURRENCE RATE, NET STATUS	444 022
PARTICIPATION GROUP	
RECURRENCE RATE, PPLI A	444 016
RECURRENCE RATE, PPLI B 1	444 017
RECURRENCE RATE, PPLI B 2	444 018
RECURRENCE RATE, RECEIPT/	444 025
COMPLIANCE	
RECURRENCE RATE, RESPONSE	444 020
RECURRENCE RATE, RTT-B	444 014
RECURRENCE RATE, UPDATE	444 021

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 34

DFI	DUI
NO.	NO.
RECURRENCE RATE, VOICE A	444 015
REFERENCE ELECTRONIC WARFARE	1803 003
ACTION VALUE	
REFERENCE POINT DATA REQUEST	1675 001
INDICATOR	
REFERENCE POINT FILTER	1745 014
INDICATOR	
RELATIVE AZIMUTH QUALITY	285 001
RELATIVE POSITION QUALITY	278 001
RELAY CONTROL ACTION	850 003
RELAY DELAY	843 001
RELAY DELAY, CONTROL	843 007
RELAY DELAY, PPLI A	843 006
RELAY DELAY, RECEIVE 1	843 010
RELAY DELAY, RECEIVE 2	843 011
RELAY FUNCTION	863 001
RELAY LABEL, DIRECTED	865 001
RELAY LEVEL	1775 001
RELAY LEVEL, INTERCOMMUNITY	1775 003
COMMUNICANT	
RELAY LEVEL, OWN NET CONTROL	1775 002
STATION	
RELAYED TRANSMISSION INDICATOR	273 002
REPORT FORMAT INDICATOR	1543 001
REPROMULGATION COUNTER	1668 001
REPROMULGATION COUNTER,	1668 002
ORIGINAL VALUE	
REPROMULGATION ORIGINATION	1778 001
CONTROL	
REPROMULGATION RELAY STATE	1776 001
REQUEST FOR ASSUME CONTROL	389 002
REQUEST NUMBER	1809 001
RESIDUAL TIME CHANGE	442 002
RESPONSE INDICATOR	710 003
RESPONSE INDICATOR, EWAC	710 002
RESPONSE TIME	1787 001
RESPONSE VALUE	1553 001
ROCKET INVENTORY	408 011
ROUTE NUMBER	1727 001
ROUTE NUMBER, 1	1916 001

APPENDIX B

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 35

DFI	DUI
NO.	NO.
ROUTE NUMBER, 2	1727 002
ROUTE NUMBER, RELAY	1784 001
RRIP, ROUTE 1	1734 001
RRIP, ROUTE 10	1734 010
RRIP, ROUTE 11	1734 011
RRIP, ROUTE 12	1734 012
RRIP, ROUTE 13	1734 013
RRIP, ROUTE 14	1734 014
RRIP, ROUTE 15	1734 015
RRIP, ROUTE 2	1734 002
RRIP, ROUTE 3	1734 003
RRIP, ROUTE 4	1734 004
RRIP, ROUTE 5	1734 005
RRIP, ROUTE 6	1734 006
RRIP, ROUTE 7	1734 007
RRIP, ROUTE 8	1734 008
RRIP, ROUTE 9	1734 009
RTT INTERROGATION TYPE	844 001
RTT REPLY STATUS INDICATOR	274 001
RUN IN HEADING	371 010
SAM MODE STATE	1576 001
SAM/SSM TYPE, 1	1622 001
SAM/SSM TYPE, 2	1622 002
SAM/SSM TYPE, 3	1622 003
SCAN TYPE	433 001
SEARCH LIGHT STATUS	1664 006
SECOND	380 001
SECOND, TENTHS	380 007
SECONDARY RUNWAY INDICATOR	1888 001
SECONDARY SURVEILLANCE RADAR STATUS	1665 011
SECTOR WIDTH	1804 001
SECTOR/AREA/LOCATION INDICATOR	1805 001
SECURE DATA UNIT IDENTIFICATION NUMBER	1677 003
SECURE DATA UNIT SERIAL NUMBER	1677 001
SECURE RADIO INDICATOR	1649 001
SECURE RADIO INDICATOR, 1	1649 002
SECURE RADIO INDICATOR, 2	1649 003
SECURE RADIO INDICATOR, 3	1649 004

SHEET 36

DUI NAME	DFI NO.	DUI NO.
SENSOR	359	001
SENSOR CHANNEL SET	359	006
SENSOR CHANNEL/CODE	359	005
SENSOR INDICATOR	359	002
SENSOR STATUS/COMMAND INDICATOR	359	004
SENSOR TARGET REPORTING STATUS	1351	001
SENSOR TYPE	1953	001
SENSOR TYPE INDICATOR	359	003
SEQUENCE NUMBER	1683	001
SEQUENTIAL BLOCK/FIELD FLAG, 1	799	001
SEQUENTIAL BLOCK/FIELD FLAG, 10	799	010
SEQUENTIAL BLOCK/FIELD FLAG, 100	799	100
SEQUENTIAL BLOCK/FIELD FLAG, 101	799	101
SEQUENTIAL BLOCK/FIELD FLAG, 102	799	102
SEQUENTIAL BLOCK/FIELD FLAG, 103	799	103
SEQUENTIAL BLOCK/FIELD FLAG, 104	799	104
SEQUENTIAL BLOCK/FIELD FLAG, 105	799	105
SEQUENTIAL BLOCK/FIELD FLAG, 106	799	106
SEQUENTIAL BLOCK/FIELD FLAG, 107	799	107
SEQUENTIAL BLOCK/FIELD FLAG, 11	799	011
SEQUENTIAL BLOCK/FIELD FLAG, 12	799	012
SEQUENTIAL BLOCK/FIELD FLAG, 13	799	013
SEQUENTIAL BLOCK/FIELD FLAG, 14	799	014
SEQUENTIAL BLOCK/FIELD FLAG, 15	799	015

APPENDIX B

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 37

DFI NO.	DUI NO.
799	016
799	017
799	018
799	019
799	002
799	020
799	021
799	022
799	023
799	024
799	025
799	026
799	027
799	028
799	029
799	003
799	030
799	031
799	032
799	033
799	034

APPENDIX B

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 38

DFI NO.	DUI NO.
799 035	SEQUENTIAL BLOCK/FIELD FLAG, 35
799 036	SEQUENTIAL BLOCK/FIELD FLAG, 36
799 037	SEQUENTIAL BLOCK/FIELD FLAG, 37
799 038	SEQUENTIAL BLOCK/FIELD FLAG, 38
799 039	SEQUENTIAL BLOCK/FIELD FLAG, 39
799 004	SEQUENTIAL BLOCK/FIELD FLAG, 4
799 040	SEQUENTIAL BLOCK/FIELD FLAG, 40
799 041	SEQUENTIAL BLOCK/FIELD FLAG, 41
799 042	SEQUENTIAL BLOCK/FIELD FLAG, 42
799 043	SEQUENTIAL BLOCK/FIELD FLAG, 43
799 044	SEQUENTIAL BLOCK/FIELD FLAG, 44
799 045	SEQUENTIAL BLOCK/FIELD FLAG, 45
799 046	SEQUENTIAL BLOCK/FIELD FLAG, 46
799 047	SEQUENTIAL BLOCK/FIELD FLAG, 47
799 048	SEQUENTIAL BLOCK/FIELD FLAG, 48
799 049	SEQUENTIAL BLOCK/FIELD FLAG, 49
799 005	SEQUENTIAL BLOCK/FIELD FLAG, 5
799 050	SEQUENTIAL BLOCK/FIELD FLAG, 50
799 051	SEQUENTIAL BLOCK/FIELD FLAG, 51
799 052	SEQUENTIAL BLOCK/FIELD FLAG, 52
799 053	SEQUENTIAL BLOCK/FIELD FLAG, 53

APPENDIX B

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 39

DFI NO.	DUI NO.
799 054	SEQUENTIAL BLOCK/FIELD FLAG, 54
799 055	SEQUENTIAL BLOCK/FIELD FLAG, 55
799 056	SEQUENTIAL BLOCK/FIELD FLAG, 56
799 057	SEQUENTIAL BLOCK/FIELD FLAG, 57
799 058	SEQUENTIAL BLOCK/FIELD FLAG, 58
799 059	SEQUENTIAL BLOCK/FIELD FLAG, 59
799 006	SEQUENTIAL BLOCK/FIELD FLAG, 6
799 060	SEQUENTIAL BLOCK/FIELD FLAG, 60
799 061	SEQUENTIAL BLOCK/FIELD FLAG, 61
799 062	SEQUENTIAL BLOCK/FIELD FLAG, 62
799 063	SEQUENTIAL BLOCK/FIELD FLAG, 63
799 064	SEQUENTIAL BLOCK/FIELD FLAG, 64
799 065	SEQUENTIAL BLOCK/FIELD FLAG, 65
799 066	SEQUENTIAL BLOCK/FIELD FLAG, 66
799 067	SEQUENTIAL BLOCK/FIELD FLAG, 67
799 068	SEQUENTIAL BLOCK/FIELD FLAG, 68
799 069	SEQUENTIAL BLOCK/FIELD FLAG, 69
799 007	SEQUENTIAL BLOCK/FIELD FLAG, 7
799 070	SEQUENTIAL BLOCK/FIELD FLAG, 70
799 071	SEQUENTIAL BLOCK/FIELD FLAG, 71
799 072	SEQUENTIAL BLOCK/FIELD FLAG, 72

APPENDIX B

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 40

DFI NO.	DUI NO.
73	799 073
74	799 074
75	799 075
76	799 076
77	799 077
78	799 078
79	799 079
80	799 080
81	799 081
82	799 082
83	799 083
84	799 084
85	799 085
86	799 086
87	799 087
88	799 088
89	799 089
90	799 090
91	799 091

APPENDIX B

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 41	
DUI NAME	DFI NO. DUI NO.
SEQUENTIAL BLOCK/FIELD FLAG, 92	799 092
SEQUENTIAL BLOCK/FIELD FLAG, 93	799 093
SEQUENTIAL BLOCK/FIELD FLAG, 94	799 094
SEQUENTIAL BLOCK/FIELD FLAG, 95	799 095
SEQUENTIAL BLOCK/FIELD FLAG, 96	799 096
SEQUENTIAL BLOCK/FIELD FLAG, 97	799 097
SEQUENTIAL BLOCK/FIELD FLAG, 98	799 098
SEQUENTIAL BLOCK/FIELD FLAG, 99	799 099
SHORADEZ	1871 001
SIGMA X POSITION	1109 001
SIGMA X VELOCITY	1109 004
SIGMA Y POSITION	1109 002
SIGMA Y VELOCITY	1109 005
SIGMA Z POSITION	1109 003
SIGMA Z VELOCITY	1109 006
SIGN OF COVARIANCE DATA ELEMENT 12	1110 001
SIGN OF COVARIANCE DATA ELEMENT 13	1110 002
SIGN OF COVARIANCE DATA ELEMENT 14	1110 003
SIGN OF COVARIANCE DATA ELEMENT 15	1110 004
SIGN OF COVARIANCE DATA ELEMENT 16	1110 005
SIGN OF COVARIANCE DATA ELEMENT 23	1110 006
SIGN OF COVARIANCE DATA ELEMENT 24	1110 007
SIGN OF COVARIANCE DATA ELEMENT 25	1110 008

APPENDIX B

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 42	
DUI NAME	DFI NO. DUI NO.
SIGN OF COVARIANCE DATA ELEMENT 26	1110 009
SIGN OF COVARIANCE DATA ELEMENT 34	1110 010
SIGN OF COVARIANCE DATA ELEMENT 35	1110 011
SIGN OF COVARIANCE DATA ELEMENT 36	1110 012
SIGN OF COVARIANCE DATA ELEMENT 45	1110 013
SIGN OF COVARIANCE DATA ELEMENT 46	1110 014
SIGN OF COVARIANCE DATA ELEMENT 56	1110 015
SIGN OF VELOCITY COVARIANCE DATA ELEMENT 12	1110 016
SIGN OF VELOCITY COVARIANCE DATA ELEMENT 13	1110 017
SIGN OF VELOCITY COVARIANCE DATA ELEMENT 23	1110 018
SIMULATION FILTER INDICATOR	1745 010
SIMULATION INDICATOR	1604 001
SITE	1719 001
SITE TYPE	1555 001
SKY FLASH AIR-TO-AIR MISSILE	1872 006
SLANT RANGE POSITION UNCERTAINTY	353 001
SLAVED INDICATOR	1716 001
SLOT ASSIGN INDEX NUMBER	1552 001
SONAR STATUS	1664 014
SONAR SYSTEM	1665 025
SONOBUOY PATTERN	350 001
SONOBUOY PATTERN RADIUS	350 005
SONOBUOY ROW SPACING	350 004
SONOBUOY SPACING	350 003
SONOBUOY TYPE	349 001
SONOBUOY TYPE NUMBER	350 002
SONOBUOY TYPE, 1	349 002
SOUND PROPAGATION PATH	377 001
SPACE AMBIGUOUS TYPE 1	749 001

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 43

DFI	DUI
NO.	NO.
SPACE AMBIGUOUS TYPE 2	749 003
SPACE AMPLIFICATION	601 005
SPACE PLATFORM	1797 005
SPACE PLATFORM ACTIVITY	1798 005
SPACE SPECIFIC TYPE	749 002
SPACE SPECIFIC TYPE INDICATOR	267 003
SPARE	756 014
SPARE	756 001
SPARE	756 002
SPARE	756 003
SPARE	756 004
SPARE	756 005
SPARE	756 006
SPARE	756 007
SPARE	756 008
SPARE	756 009
SPARE	756 010
SPARE	756 011
SPARE	756 012
SPARE	756 013
SPARE	756 015
SPARE	756 016
SPARE	756 017
SPARE	756 018
SPARE	756 019
SPARE	756 020
SPARE	756 021
SPARE	756 022
SPARE	756 023
SPARE	756 024
SPARE	756 025
SPARE	756 026
SPARE	756 027
SPARE	756 028
SPARE	756 029
SPARE	756 030
SPARE	756 031
SPARE	756 032
SPARE	756 033
SPARE	756 034

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 44

DFI	DUI
NO.	NO.
SPARE	756 035
SPARE	756 036
SPARE	756 037
SPARE	756 038
SPARE	756 039
SPARE	756 040
SPARE	756 041
SPARE	756 042
SPARE	756 043
SPARE	756 044
SPARE	756 045
SPARE	756 046
SPARE	756 047
SPARE	756 048
SPARE	756 049
SPARE	756 050
SPARE	756 051
SPARE	756 052
SPARE	756 053
SPARE	756 054
SPARE	756 055
SPARE	756 056
SPARE	756 057
SPARE	756 058
SPARE	756 059
SPARE	756 060
SPARE	756 061
SPARE	756 062
SPARE	756 063
SPARE	756 064
SPARE	756 065
SPARE	756 066
SPARE	756 067
SPARE	756 068
SPARE	756 069
SPARE ENV/CAT FILTER INDICATOR	1745 008
SPARE IDENTITY FILTER INDICATOR	1745 022
SPECIAL CODE I	1752 001
SPECIAL CODE I APPLICABILITY	296 001

SHEET 45

DUI NAME	DFI NO.	DUI NO.
SPECIAL CODE II	1752	002
SPECIAL CODE II APPLICABILITY	296	002
SPECIAL CODE III	1752	003
SPECIAL CODE III APPLICABILITY	296	003
SPECIAL DEPTH BOMB INVENTORY	408	006
SPECIAL INTEREST INDICATOR	1861	001
SPECIAL MISSILE INVENTORY	408	010
SPECIAL PROCESSING FILTER INDICATOR	1745	009
SPECIAL PROCESSING INDICATOR	292	002
SPECIAL PROCESSOR STATUS, 1	1664	017
SPECIAL PROCESSOR STATUS, 2	1664	018
SPECIAL SONOBUOY STATUS, 1	1664	015
SPECIAL SONOBUOY STATUS, 2	1664	016
SPECIAL TORPEDO INVENTORY	408	008
SPEED	367	018
SPEED, ASW	367	023
SQUARE/CIRCLE SWITCH	351	009
SQUARE/CIRCLE SWITCH, 1	351	006
SQUARE/CIRCLE SWITCH, 2	351	012
SQUAWK FLASH INDICATOR	1650	001
STATUS INFORMATION DISCRETE	704	021
STRENGTH	386	013
STRENGTH, EVALUATED	386	003
STRENGTH, PERCENT OF TRACKED VEHICLES	386	002
STRENGTH, TOTAL NUMBER OF VEHICLES	386	001
SUBLABEL, J-SERIES	271	005
SUBLABEL, J-SERIES REQUEST	271	007
SUBSURFACE (MARITIME)	809	002
AMBIGUOUS TYPE 1		
SUBSURFACE (MARITIME)	809	003
AMBIGUOUS TYPE 2		
SUBSURFACE (MARITIME)	601	003
AMPLIFICATION		
SUBSURFACE (MARITIME) PLATFORM	1797	003
SUBSURFACE (MARITIME) PLATFORM ACTIVITY	1798	003

APPENDIX B

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 46

DFI	DUI
NO.	NO.
DUI NAME	
SUBSURFACE (MARITIME) SPECIFIC TYPE	809 001
SUMMATION INDICATOR	1621 001
SUPER 530 AIR-TO-AIR MISSILE	1872 024
SUPER 530D AIR-TO-AIR MISSILE	1872 025
SURFACE (MARITIME) AMBIGUOUS TYPE 1	808 002
SURFACE (MARITIME) AMBIGUOUS TYPE 2	808 003
SURFACE (MARITIME) AMPLIFICATION	601 002
SURFACE (MARITIME) PLATFORM	1797 002
SURFACE (MARITIME) PLATFORM ACTIVITY	1798 002
SURFACE (MARITIME) SPECIFIC TYPE	808 001
SURFACE SEARCH RADAR	1665 020
SUSPECT IDENTITY FILTER INDICATOR	1745 020
TABLE POSITION NUMBER, A	1946 002
TABLE POSITION NUMBER, OWN	1946 001
TABLE SEGMENT	1946 003
TANKER AIRCRAFT	1665 042
TARGET BEARING	372 018
TARGET DEFENSES	890 002
TARGET POSITION QUALITY	280 002
TARGET RANGE	757 015
TARGET TYPE	889 001
TASK PRIORITY	1816 001
TBD AIR-TO-AIR MISSILE	1872 029
TBD AIR-TO-AIR MISSILE	1872 030
TBD AIR-TO-AIR MISSILE	1872 031
TBD AIR-TO-AIR MISSILE	1872 032
TBD AIR-TO-SURFACE MISSILE	1872 011
TBD AIR-TO-SURFACE MISSILE	1872 012
TBD AIR-TO-SURFACE MISSILE	1872 013
TBD AIR-TO-SURFACE MISSILE	1872 014
TELEMETRY POD SUBSYSTEM STATUS	1665 046
TELEVISION STATUS	1665 006

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 47

DFI	DUI
NO.	NO.
TERTIARY SURVEILLANCE RADAR STATUS	1665 012
TEST DURATION COUNT, 1	1791 001
TEST DURATION COUNT, 2	1791 002
TEST PATTERN	445 004
TEST PATTERN, 1	445 005
TEXT INDICATOR	325 003
THREAT EVALUATION	424 003
THREAT FUEL	409 004
THREAT POSTURE	401 001
THREAT TYPE	1762 002
THREAT WARNING CONDITION	391 002
THREAT WARNING ENVIRONMENT	814 001
THREAT WEAPON	399 018
TIME DISCRETE	1659 001
TIME DURATION	1840 001
TIME FUNCTION	1681 001
TIME FUNCTION, 1	1681 005
TIME FUNCTION, ASW	1681 003
TIME INDICATOR	1681 004
TIME OF ARRIVAL	387 019
TIME OF EVENT, HUNDREDTHS	380 004
TIME OF EVENT, MINUTE	797 002
TIME OF EVENT, SECOND	380 003
TIME OF OBSERVATION, HOUR	792 003
TIME OF OBSERVATION, MINUTE	797 003
TIME QUALITY	279 001
TIME REPORT FUNCTION	1681 002
TIME SHARING IMPLEMENTATION	1834 001
TIME SLOT ASSIGNMENT ACTION	446 001
TIME SLOT ASSIGNMENT QUALIFIER	351 015
TIME SLOT ASSIGNMENT TYPE	449 001
TIME SLOT NUMBER, CONTROL	441 036
TIME SLOT NUMBER, CURRENT	441 010
TIME SLOT NUMBER, INDEX	441 021
TIME SLOT NUMBER, NET STATUS	441 003
PARTICIPATION GROUP	
TIME SLOT NUMBER, NEW	441 040
TIME SLOT NUMBER, PPLI A	441 033
TIME SLOT NUMBER, PPLI B 1	441 034

SHEET 48

DUI NAME	DFI NO.	DUI NO.
TIME SLOT NUMBER, PPLI B 2	441	035
TIME SLOT NUMBER, RTT-B	441	031
TIME SLOT NUMBER, VOICE A	441	032
TIME SLOT OFFSET, CONTROL NET ENTRY	348	019
TIME SLOT SET	847	013
TIME SLOT SET, CONTROL	847	021
TIME SLOT SET, CURRENT	847	012
TIME SLOT SET, NET STATUS	847	001
PARTICIPATION GROUP		
TIME SLOT SET, NEW	847	002
TIME SLOT SET, PPLI A	847	018
TIME SLOT SET, PPLI B 1	847	019
TIME SLOT SET, PPLI B 2	847	020
TIME SLOT SET, RTT-B	847	016
TIME SLOT SET, VOICE A	847	017
TIME SLOT TYPE	265	002
TIME TAG, A	1986	001
TIME TAG, B	1986	002
TIME TAG, C	1986	003
TIME TAG, D	1986	004
TIME TAG, E	1986	005
TIME TAG, TIME OF VALIDITY	826	001
TIME TO INTERCEPT	387	023
TIME-TO-GO	387	018
TIMEOUT INTERVAL	1544	001
TOMAHAWK WEAPON CONTROL SYSTEM	1665	058
TORPEDO INVENTORY, 1	408	053
TORPEDO INVENTORY, 2	408	054
TORPEDO TUBE	1665	052
TORPEDO TYPE, 1	399	016
TORPEDO TYPE, 2	399	017
TOTAL POINTS IN SERIES	891	001
TOWED ARRAY SONAR	1665	057
TRACK IDENTIFIER	1906	001
TRACK NUMBER, ADDRESSEE	769	006
TRACK NUMBER, ADDRESSEE 1	769	017
TRACK NUMBER, ADDRESSEE 2	769	019
TRACK NUMBER, ADDRESSEE 3	769	020
TRACK NUMBER, ADDRESSEE 4	769	021

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 49

DUI NAME	DFI NO.	DUI NO.
TRACK NUMBER, ADDRESSEE 5	769	022
TRACK NUMBER, ADDRESSEE 6	769	016
TRACK NUMBER, ASSOCIATED	769	008
TRACK NUMBER, CONTROLLING AGENCY OF TN REFERENCE	769	031
TRACK NUMBER, DEMAND ORIGINATOR A	769	001
TRACK NUMBER, DEMAND ORIGINATOR B	769	014
TRACK NUMBER, DEMAND ORIGINATOR C	769	027
TRACK NUMBER, DESTINATION	769	064
TRACK NUMBER, DROPPED	769	030
TRACK NUMBER, FLIGHT LEAD	769	039
TRACK NUMBER, FRIENDLY WEAPON	769	004
TRACK NUMBER, INDEX ORIGINATOR	769	042
TRACK NUMBER, INDEX ORIGINATOR A	769	048
TRACK NUMBER, INDEX ORIGINATOR B	769	049
TRACK NUMBER, INDEX ORIGINATOR C	769	050
TRACK NUMBER, INDEX ORIGINATOR D	769	051
TRACK NUMBER, INDEX ORIGINATOR E	769	052
TRACK NUMBER, INDEX ORIGINATOR F	769	053
TRACK NUMBER, INDEX ORIGINATOR G	769	054
TRACK NUMBER, INTERCOMMUNITY COMMUNICANT	769	015
TRACK NUMBER, JU	769	056
TRACK NUMBER, JU 1	769	032
TRACK NUMBER, JU 10	769	012
TRACK NUMBER, JU 11	769	013
TRACK NUMBER, JU 2	769	033
TRACK NUMBER, JU 3	769	034
TRACK NUMBER, JU 4	769	035
TRACK NUMBER, JU 5	769	036

APPENDIX B

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 50

DFI NO.	DUI NO.
TRACK NUMBER, JU 6	769 037
TRACK NUMBER, JU 7	769 038
TRACK NUMBER, JU 8	769 023
TRACK NUMBER, JU 9	769 011
TRACK NUMBER, MISSION COMMANDER	769 041
TRACK NUMBER, NEW CONTROL AGENCY	769 024
TRACK NUMBER, OBJECTIVE	769 010
TRACK NUMBER, ORIGIN	769 009
TRACK NUMBER, ORIGINATOR	769 063
TRACK NUMBER, PREVIOUSLY REPORTED	769 018
TRACK NUMBER, REFERENCE	769 002
TRACK NUMBER, REFERENCE/INDEX NUMBER INDICATOR	381 001
TRACK NUMBER, RELATED	769 007
TRACK NUMBER, RELATED 1	769 040
TRACK NUMBER, RELATED 2	769 044
TRACK NUMBER, RELATED 3	769 043
TRACK NUMBER, RELAY 1	769 065
TRACK NUMBER, RELAY 2	769 066
TRACK NUMBER, RELAY 3	769 067
TRACK NUMBER, RELAY 4	769 068
TRACK NUMBER, RELAY 5	769 069
TRACK NUMBER, RELAY 6	769 070
TRACK NUMBER, RELAY 7	769 071
TRACK NUMBER, REPORT/REQUEST	710 001
TRACK NUMBER, RETAINED	769 029
TRACK NUMBER, SECONDARY 1	769 057
TRACK NUMBER, SECONDARY 2	769 058
TRACK NUMBER, SECONDARY 3	769 059
TRACK NUMBER, SECONDARY 4	769 060
TRACK NUMBER, SOURCE	769 003
TRACK NUMBER, SPECIFIED	769 061
TRACK NUMBER, SUBJECT	769 028
TRACK NUMBER, TARGET	769 005
TRACK NUMBER, TARGET A	769 025
TRACK NUMBER, TARGET B	769 026
TRACK NUMBER, TARGETED	769 062

APPENDIX B

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 51

DFI	DUI
NO.	NO.
TRACK NUMBER, THREAT	769 055
TRACK QUALITY	280 001
TRACK QUALITY, 1	280 003
TRACKING STATUS	1627 001
TRANSMISSION TERMINATION	1770 001
DESIGNATOR	
TYPE MODIFICATION	1661 002
TYPE MODIFIER	849 002
TYPE OF BURST	1768 001
TYPE OF STORES	1623 005
TYPE OF STORES, 1	1623 001
TYPE OF STORES, 2	1623 002
TYPE OF STORES, 3	1623 003
TYPE OF STORES, 4	1623 004
TYPE OF STORES, 5	1623 006
TYPE OF STORES, 6	1623 007
TYPE OF STORES, 7	1623 008
TYPE OF STORES, 8	1623 009
U COORDINATE	276 001
UHF DIRECTION FINDER	268 016
UNCERTAINTY ORIENTATION	353 004
UNCERTAINTY TILT	353 005
UNIQUE VARIABLE UPDATE NUMBER	1548 001
UNIT DESIGNATOR	1793 001
UNIT TYPE	288 001
UNIVERSAL TRANSVERSE MERCATOR	819 001
10-METER EASTING	
UNIVERSAL TRANSVERSE MERCATOR	820 001
10-METER NORTHING	
UNIVERSAL TRANSVERSE MERCATOR	821 001
100,000 METER SQUARE COLUMN	
UNIVERSAL TRANSVERSE MERCATOR	816 001
100,000 METER SQUARE ROW	
UNIVERSAL TRANSVERSE MERCATOR	818 001
GRID ZONE COLUMN	
UNIVERSAL TRANSVERSE MERCATOR	825 001
GRID ZONE ROW	
UNKNOWN IDENTITY FILTER	1745 016
INDICATOR	
V COORDINATE	277 001

APPENDIX B

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 52

DFI	DUI
NO.	NO.
VARIANCE XX	1120 001
VARIANCE XY	1120 004
VARIANCE XZ	1120 005
VARIANCE YY	1120 002
VARIANCE YZ	1120 006
VARIANCE ZZ	1120 003
VECTOR DISCRETE	1651 001
VELOCITY COVARIANCE DATA	1112 001
ELEMENT 11	
VELOCITY COVARIANCE DATA	1112 002
ELEMENT 12	
VELOCITY COVARIANCE DATA	1112 003
ELEMENT 13	
VELOCITY COVARIANCE DATA	1112 004
ELEMENT 22	
VELOCITY COVARIANCE DATA	1112 005
ELEMENT 23	
VELOCITY COVARIANCE DATA	1112 006
ELEMENT 33	
VELOCITY DOWN UNCERTAINTY	353 009
VELOCITY EAST UNCERTAINTY	353 008
VELOCITY NORTH UNCERTAINTY	353 007
VELOCITY, DOWN	1401 006
VERTICAL CONTROL COMMAND	707 001
VERTICAL ERROR	708 003
VERTICAL LAUNCHER	1665 053
VERTICAL POSITION UNCERTAINTY	353 003
VHF DIRECTION FINDER	268 015
VISIBILITY	757 013
VMF STATUS	1625 014
VOICE CALL SIGN	264 001
VOICE CALL SIGN INDICATOR	1717 001
VOICE CALL SIGN, NEW CONTROL	264 003
AGENCY	
VOICE FREQUENCY/CHANNEL	417 016
VOICE FREQUENCY/CHANNEL	898 001
INDICATOR	
VOICE GROUP	894 001
VOICE GROUP A CHANNEL	417 002
VOICE GROUP B CHANNEL	417 003

TABLE B-3. ALPHABETICAL LIST OF DATA USE IDENTIFIERS (DUIS)

SHEET 53

DFI	DUI
NO.	NO.
DUI NAME	
WARTIME RESERVE MODE INDICATOR	1821 001
WAYPOINT ACTION/DESCRIPTOR	1705 001
WEAPON ENGAGEMENT STATUS	394 009
WEAPON ID	700 001
WEAPON STATUS DATA REQUEST	1675 005
INDICATOR	
WEAPON SYSTEM	700 002
WEAPON TYPE	399 003
WEATHER DATA REQUEST INDICATOR	1675 006
WIND DIRECTION	371 003
WIND GUST INCREMENT	367 013
WIND SHEAR INDICATOR	1887 001
WIND SPEED	367 012
WINGMAN IDENTIFICATION LETTER/	731 001
NUMBER	
WORD FORMAT	1550 001
X POSITION IN WGS-84	1108 001
X VELOCITY IN WGS-84	1113 001
Y POSITION IN WGS-84	1108 002
Y VELOCITY IN WGS-84	1113 002
Z POSITION IN WGS-84	1108 003
Z VELOCITY IN WGS-84	1113 003
ZOOM RELAY TRANSMIT NET	348 018

MIL-STD-6016B

APPENDIX B

THIS PAGE INTENTIONALLY LEFT BLANK

APPENDIX B

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 1

DUI NAME	DFI NO.	DUI NO.
VOICE CALL SIGN	264	001
VOICE CALL SIGN, NEW CONTROL AGENCY	264	003
TIME SLOT TYPE	265	002
EMITTER NUMBER INDICATOR	266	001
LAND (GROUND) SPECIFIC TYPE INDICATOR	267	001
AIR SPECIFIC TYPE INDICATOR	267	002
SPACE SPECIFIC TYPE INDICATOR	267	003
ES FREQUENCY BAND A	268	001
ES FREQUENCY BAND B	268	002
ES FREQUENCY BAND C	268	003
ES FREQUENCY BAND D	268	004
ES FREQUENCY BAND E	268	005
ES FREQUENCY BAND F	268	006
ES FREQUENCY BAND G	268	007
ES FREQUENCY BAND H	268	008
ES FREQUENCY BAND I	268	009
ES FREQUENCY BAND J	268	010
ES FREQUENCY BAND K	268	011
ES FREQUENCY BAND L	268	012
ES FREQUENCY BAND M	268	013
HF DIRECTION FINDER	268	014
VHF DIRECTION FINDER	268	015
UHF DIRECTION FINDER	268	016
LINK 11/LINK 11B TRACK NUMBER	269	016
LABEL, J-SERIES	270	004
LABEL, J-SERIES REQUEST	270	007
SUBLABEL, J-SERIES	271	005
SUBLABEL, J-SERIES REQUEST	271	007
EA FREQUENCY BAND A	272	001
EA FREQUENCY BAND B	272	002
EA FREQUENCY BAND C	272	003
EA FREQUENCY BAND D	272	004
EA FREQUENCY BAND E	272	005
EA FREQUENCY BAND F	272	006
EA FREQUENCY BAND G	272	007
EA FREQUENCY BAND H	272	008
EA FREQUENCY BAND I	272	009

APPENDIX B

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 2

DFI	DUI
NO.	NO.
272	010
272	011
272	012
272	013
272	014
272	015
272	016
273	002
274	001
275	001
275	004
276	001
277	001
278	001
279	001
280	001
280	002
280	003
281	001
281	002
281	014
281	015
281	016
281	017
282	001
282	002
282	012
282	013
282	014
282	015
283	001
283	002
283	003
283	004
284	001
285	001
286	001
287	001

APPENDIX B

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 3

DUI NAME	DFI NO.	DUI NO.
BASE ACTUAL WEATHER DESCRIPTOR	287	002
BASE ACTUAL WEATHER INTENSITY/ PROXIMITY	287	003
UNIT TYPE	288	001
DELTA LATITUDE, 0.0313 MINUTE 1	289	003
DELTA LATITUDE, 0.0313 MINUTE 2	289	004
DELTA LONGITUDE, 0.0313 MINUTE 1	290	003
DELTA LONGITUDE, 0.0313 MINUTE 2	290	004
LINK 4A ADDRESS	291	001
SPECIAL PROCESSING INDICATOR	292	002
MODE I CODE	293	003
MODE II CODE	294	002
MODE III CODE	295	002
MODE III CODE, 1	295	003
SPECIAL CODE I APPLICABILITY	296	001
SPECIAL CODE II APPLICABILITY	296	002
SPECIAL CODE III APPLICABILITY	296	003
MODE IV INDICATOR	298	001
LINK 11/LINK 11B TRACK NUMBER APPLICABILITY	299	001
NATO LINK 1 TRACK NUMBER APPLICABILITY	299	002
ATDL-1 TRACK NUMBER APPLICABILITY	299	003
IJMS, SYSTEM REFERENCE NUMBER APPLICABILITY	299	004
END OF TARGET REPORTING CYCLE	312	001
HANDOVER INDICATOR	325	001
MERGED MEASUREMENT INDICATOR	325	002
TEXT INDICATOR	325	003
EMITTER STATUS	342	001
NET NUMBER	348	001
NET NUMBER, NONC2 JU-TO-NONC2 JU NPG A	348	002

APPENDIX B

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 4

DFI	DUI
NO.	NO.
DFI	DUI
NAME	
NET NUMBER, NONC2 JU-TO-NONC2	348 003
JU NPG B	
NET NUMBER, RECEIVE	348 004
NET NUMBER, TRANSMIT	348 005
CONTROL CHANNEL	348 006
NET NUMBER, RELAY	348 007
NET NUMBER, 3	348 008
NET NUMBER, DEFAULT	348 010
NET NUMBER, NET STATUS	348 011
PARTICIPATION GROUP	
NET NUMBER, ORIGINAL NET	348 012
NET NUMBER, 1	348 013
NET NUMBER, 2	348 014
NET NUMBER, 4	348 015
NET NUMBER, 5	348 016
NET NUMBER, 6	348 017
ZOOM RELAY TRANSMIT NET	348 018
TIME SLOT OFFSET, CONTROL NET	348 019
ENTRY	
NET NUMBER, CONTROL NET ENTRY	348 020
NET NUMBER, SPECIFIED	348 021
NET NUMBER, DECRYPTION	348 022
NET NUMBER, 7	348 023
SONOBUOY TYPE	349 001
SONOBUOY TYPE, 1	349 002
SONOBUOY PATTERN	350 001
SONOBUOY TYPE NUMBER	350 002
SONOBUOY SPACING	350 003
SONOBUOY ROW SPACING	350 004
SONOBUOY PATTERN RADIUS	350 005
SQUARE/CIRCLE SWITCH, 1	351 006
SQUARE/CIRCLE SWITCH	351 009
SQUARE/CIRCLE SWITCH, 2	351 012
TIME SLOT ASSIGNMENT QUALIFIER	351 015
IJMS, SYSTEM REFERENCE NUMBER	352 001
SLANT RANGE POSITION	353 001
UNCERTAINTY	
CROSS RANGE POSITION	353 002
UNCERTAINTY	

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 5

DUI NAME	DFI NO.	DUI NO.
VERTICAL POSITION UNCERTAINTY	353	003
UNCERTAINTY ORIENTATION	353	004
UNCERTAINTY TILT	353	005
VELOCITY NORTH UNCERTAINTY	353	007
VELOCITY EAST UNCERTAINTY	353	008
VELOCITY DOWN UNCERTAINTY	353	009
BEARING UNCERTAINTY	353	010
ELEVATION UNCERTAINTY	353	011
BEARING ANGLE RATE UNCERTAINTY	353	012
ELEVATION ANGLE RATE UNCERTAINTY	353	013
RANGE UNCERTAINTY	353	014
RANGE RATE UNCERTAINTY	353	015
FORCE TELL INDICATOR	354	002
EMERGENCY INDICATOR	355	002
HOLDING CONTACT	356	001
DATA REPORT TYPE	357	001
CONFIDENCE LEVEL	358	001
AMPLIFICATION CONFIDENCE	358	002
SENSOR	359	001
SENSOR INDICATOR	359	002
SENSOR TYPE INDICATOR	359	003
SENSOR STATUS/COMMAND INDICATOR	359	004
SENSOR CHANNEL/CODE	359	005
SENSOR CHANNEL SET	359	006
BEARING DRIFT	360	001
AUDIO	361	001
PRF/PRI INDICATOR	362	015
ANTENNA SCAN RATE/PERIOD INDICATOR	362	016
POINT TYPE	363	003
POINT TYPE, 1	363	004
ALTITUDE SOURCE	364	001
ALTITUDE, ANGLE ORIGIN	365	001
CLOUD HEIGHT, 1	365	025
CLOUD HEIGHT, 2	365	026
CLOUD HEIGHT, 3	365	027
ALTITUDE, 25 FT	365	033

APPENDIX B

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 6

DUI NAME	DFI NO.	DUI NO.
ALTITUDE, 100 FT	365	034
ALTITUDE, 100 FT 1	365	035
ALTITUDE, 100 FT 2	365	036
RADAR WATCH ALTITUDE	365	037
DEPTH, 15 METERS	366	008
DEPTH CATEGORY	366	009
DEPTH, ABOVE/BELOW LAYER (SENSOR)	366	010
DEPTH, SENSOR	366	011
DEPTH INDICATOR (SONOBUOY)	366	012
DEPTH, TRANSDUCER (SONOBUOY)	366	013
DEPTH CONTACT	366	014
WIND SPEED	367	012
WIND GUST INCREMENT	367	013
SPEED	367	018
SPEED, ASW	367	023
ELECTRONIC WARFARE COORDINATOR INDICATOR	368	001
PROBABILITY OF OWN FORCES	369	001
PROBABILITY OF ENEMY FORCES	369	002
AMBIGUOUS TYPE 1 PROBABILITY	369	003
AMBIGUOUS TYPE 2 PROBABILITY	369	004
DOPPLER	370	001
WIND DIRECTION	371	003
EGRESS HEADING	371	009
RUN IN HEADING	371	010
COURSE	371	015
DESIGNATED FLYING COURSE	371	016
BEARING, INTERCEPT	372	001
BEARING	372	007
TARGET BEARING	372	018
BEARING, 1	372	019
BEARING, 2	372	020
BEARING 1, ASW	372	021
BEARING 2, ASW	372	022
BEARING, ASW PLOT	372	023
BEARING ACCURACY, ASW	372	024
BEARING REPORT TYPE	373	001
BROADBAND	374	001

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 7

DUI NAME	DFI NO.	DUI NO.
RANGE ACCURACY, ASW	375	001
IDENTITY AMPLIFYING DESCRIPTOR	376	001
IDENTITY, EVALUATED	376	002
IDENTITY	376	007
SOUND PROPAGATION PATH	377	001
POINT/TRACK INDICATOR	378	001
POINT AMPLIFICATION	379	002
SECOND	380	001
HUNDREDTHS	380	002
TIME OF EVENT, SECOND	380	003
TIME OF EVENT, HUNDREDTHS	380	004
EVENT DURATION, SECONDS	380	005
EVENT DURATION, HUNDREDTHS	380	006
SECOND, TENTHS	380	007
TRACK NUMBER, REFERENCE/INDEX NUMBER INDICATOR	381	001
FIX OR BEARING DESCRIPTOR	382	004
BEARING ACCURACY	383	006
BEARING ANGLE RATE	384	001
ELEVATION ANGLE RATE	384	002
RANGE RATE	384	003
EXERCISE INDICATOR	385	003
STRENGTH, TOTAL NUMBER OF VEHICLES	386	001
STRENGTH, PERCENT OF TRACKED VEHICLES	386	002
STRENGTH, EVALUATED	386	003
STRENGTH	386	013
TIME-TO-GO	387	018
TIME OF ARRIVAL	387	019
TIME TO INTERCEPT	387	023
REQUEST FOR ASSUME CONTROL	389	002
CANCELLATION INDICATOR	390	003
THREAT WARNING CONDITION	391	002
RECEIPT/COMPLIANCE	392	008
AIR WEAPON/ENGAGEMENT STATUS, B	394	005
AIR WEAPON/ENGAGEMENT STATUS, A	394	007

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 8

DUI NAME	DFI NO.	DUI NO.
WEAPON ENGAGEMENT STATUS	394	009
PERIMETER ENGAGEMENT STATUS	395	001
NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 1	396	001
NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 2	396	002
NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 3	396	003
NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 4	396	004
NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 5	396	005
NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 6	396	006
NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 7	396	007
NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 8	396	008
NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 9	396	009
NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 10	396	010
NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 11	396	011
NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 12	396	012
COMMAND	398	003
WEAPON TYPE	399	003
MISSILE TYPE, 1	399	004
MISSILE TYPE, 2	399	005
MISSILE TYPE, 3	399	006
MISSILE TYPE, 4	399	007
MISSILE TYPE, 5	399	008
MISSILE TYPE, 6	399	009
MISSILE TYPE, 7	399	010
MISSILE TYPE, 8	399	011
MISSILE TYPE, 9	399	012
MISSILE TYPE, 10	399	013
MISSILE TYPE, 11	399	014

SHEET 9

DUI NAME	DFI NO.	DUI NO.
MISSILE TYPE, 12	399	015
TORPEDO TYPE, 1	399	016
TORPEDO TYPE, 2	399	017
THREAT WEAPON	399	018
PAIRING ACTION	400	002
THREAT POSTURE	401	001
CONVENTIONAL DEPTH BOMB INVENTORY	408	005
SPECIAL DEPTH BOMB INVENTORY	408	006
CONVENTIONAL TORPEDO INVENTORY	408	007
SPECIAL TORPEDO INVENTORY	408	008
CONVENTIONAL MISSILE INVENTORY	408	009
SPECIAL MISSILE INVENTORY	408	010
ROCKET INVENTORY	408	011
ACTIVE SONOBUOY INVENTORY	408	012
PASSIVE SONOBUOY INVENTORY	408	013
COLD INVENTORY	408	014
HOT INVENTORY	408	015
NUMBER OF STORES, 1	408	032
NUMBER OF STORES, 2	408	033
NUMBER OF STORES, 3	408	034
NUMBER OF STORES, 4	408	035
NUMBER OF STORES	408	036
OPERATIONAL MISSILE INVENTORY, 1	408	037
OPERATIONAL MISSILE INVENTORY, 2	408	038
OPERATIONAL MISSILE INVENTORY, 3	408	039
NUMBER OF STORES, 5	408	040
NUMBER OF STORES, 6	408	041
NUMBER OF STORES, 7	408	042
NUMBER OF STORES, 8	408	043
OPERATIONAL MISSILE INVENTORY, 4	408	044
OPERATIONAL MISSILE INVENTORY, 5	408	045
OPERATIONAL MISSILE INVENTORY, 6	408	046

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 10

DUI NAME	DFI NO.	DUI NO.
OPERATIONAL MISSILE INVENTORY, 7	408	047
OPERATIONAL MISSILE INVENTORY, 8	408	048
OPERATIONAL MISSILE INVENTORY, 9	408	049
OPERATIONAL MISSILE INVENTORY, 10	408	050
OPERATIONAL MISSILE INVENTORY, 11	408	051
OPERATIONAL MISSILE INVENTORY, 12	408	052
TORPEDO INVENTORY, 1	408	053
TORPEDO INVENTORY, 2	408	054
FUEL, SURFACE (MARITIME)	409	001
FUEL	409	003
THREAT FUEL	409	004
FREQUENCY, INTERCEPT	417	001
VOICE GROUP A CHANNEL	417	002
VOICE GROUP B CHANNEL	417	003
FREQUENCY, 1	417	006
FREQUENCY, 2	417	007
VOICE FREQUENCY/CHANNEL	417	016
LINK 4A FREQUENCY	417	017
FREQUENCY, SOURCE ACOUSTIC	417	020
FREQUENCY, ASSOCIATED ACOUSTIC 1	417	021
FREQUENCY, ASSOCIATED ACOUSTIC 2	417	022
AREA MAJOR AXIS, 4	419	001
AREA MINOR AXIS, 4	419	002
AREA MAJOR AXIS	419	003
AREA MINOR AXIS	419	004
AREA MAJOR AXIS, 1	419	005
AREA MAJOR AXIS, 2	419	006
AREA MINOR AXIS, 1	419	007
AREA MINOR AXIS, 2	419	008
AREA MINOR AXIS, 3	419	009
AREA MAJOR AXIS, 3	419	010

APPENDIX B

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 11

DUI NAME	DFI NO.	DUI NO.
CHANNEL NUMBER, SONOBUOY RF	420	008
EMITTER NUMBER	422	001
MULTIPLE EVALUATION	423	001
THREAT EVALUATION	424	003
BROAD CLASSIFICATION	425	003
AMPLIFYING CHARACTERISTICS	426	003
JAMMER RECEIVED SIGNAL LEVEL	427	001
ELEVATION ANGLE	428	002
ELEVATION ANGLE, 2	428	003
LOCK-ON	429	001
MODE NUMBER	430	001
EMITTER CONFIDENCE	431	003
PLATFORM EVALUATION CONFIDENCE	431	004
JITTER	432	001
SCAN TYPE	433	001
POLARIZATION	434	001
PULSE WIDTH	435	006
EMITTER PRF	440	001
PULSE REPETITION FREQUENCY	440	006
TIME SLOT NUMBER, NET STATUS	441	003
PARTICIPATION GROUP		
TIME SLOT NUMBER, CURRENT	441	010
TIME SLOT NUMBER, INDEX	441	021
TIME SLOT NUMBER, RTT-B	441	031
TIME SLOT NUMBER, VOICE A	441	032
TIME SLOT NUMBER, PPLI A	441	033
TIME SLOT NUMBER, PPLI B 1	441	034
TIME SLOT NUMBER, PPLI B 2	441	035
TIME SLOT NUMBER, CONTROL	441	036
TIME SLOT NUMBER, NEW	441	040
RESIDUAL TIME CHANGE	442	002
RECURRENCE RATE	444	001
RECURRENCE RATE, 1	444	002
RECURRENCE RATE, 2	444	003
RECURRENCE RATE, 4	444	004
RECURRENCE RATE, 3	444	005
RECURRENCE RATE INDICATOR	444	013
RECURRENCE RATE, RTT-B	444	014
RECURRENCE RATE, VOICE A	444	015

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 12

DFI	DUI
NO.	NO.
DUI NAME	
RECURRENCE RATE, PPLI A	444 016
RECURRENCE RATE, PPLI B 1	444 017
RECURRENCE RATE, PPLI B 2	444 018
RECURRENCE RATE, CONTROL	444 019
RECURRENCE RATE, RESPONSE	444 020
RECURRENCE RATE, UPDATE	444 021
RECURRENCE RATE, NET STATUS	444 022
PARTICIPATION GROUP	
OVERALL RECURRENCE RATE, NET	444 023
STATUS PARTICIPATION GROUP	
RECURRENCE RATE, RECEIPT/	444 025
COMPLIANCE	
TEST PATTERN	445 004
TEST PATTERN, 1	445 005
TIME SLOT ASSIGNMENT ACTION	446 001
EPOCH COUNT CURRENT	448 002
TIME SLOT ASSIGNMENT TYPE	449 001
DUTY ASSIGNMENT FUNCTIONAL	501 001
AREA	
PERIODIC REPORT INDICATOR	549 001
AIR AMPLIFICATION	601 001
SURFACE (MARITIME)	601 002
AMPLIFICATION	
SUBSURFACE (MARITIME)	601 003
AMPLIFICATION	
LAND (GROUND) AMPLIFICATION	601 004
SPACE AMPLIFICATION	601 005
WEAPON ID	700 001
WEAPON SYSTEM	700 002
COMMAND MISSION	701 002
DUTY ASSIGNMENT	702 002
DROP DISCRETE	704 004
STATUS INFORMATION DISCRETE	704 021
AUTOPILOT CONTROL BIT	705 001
AUTOPILOT STATUS	706 001
VERTICAL CONTROL COMMAND	707 001
LATERAL CONTROL COMMAND	707 002
VERTICAL ERROR	708 003
LATERAL ERROR	708 004

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 13

DFI	DUI
NO.	NO.
DUI NAME	
TRACK NUMBER, REPORT/REQUEST	710 001
RESPONSE INDICATOR, EWAC	710 002
RESPONSE INDICATOR	710 003
MISSION CORRELATOR	725 003
MISSION CORRELATOR, NEW	725 004
FLIGHT LEADER INDICATOR	730 001
WINGMAN IDENTIFICATION LETTER/ NUMBER	731 001
AIRBORNE INDICATOR	732 002
ATDL-1 TRACK NUMBER	746 002
NATO LINK 1 TRACK NUMBER	747 001
NATIONALITY/ALLIANCE OF TRACK	748 001
SPACE AMBIGUOUS TYPE 1	749 001
SPACE SPECIFIC TYPE	749 002
SPACE AMBIGUOUS TYPE 2	749 003
ACTIVITY AMPLIFICATION INDEX	752 001
OPERATIONAL STATUS	753 001
OPERATIONAL CAPABILITY	753 002
OPERATIONAL CAPABILITY, AIRCRAFT	753 003
LOCAL DISCRETE IDENTIFIER	754 001
EPOCH SUBDIVISION	755 001
EPOCH SUBDIVISION, EXECUTION	755 002
SPARE	756 001
SPARE	756 002
SPARE	756 003
SPARE	756 004
SPARE	756 005
SPARE	756 006
SPARE	756 007
SPARE	756 008
SPARE	756 009
SPARE	756 010
SPARE	756 011
SPARE	756 012
SPARE	756 013
SPARE	756 014
SPARE	756 015
SPARE	756 016

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 14

DFI	DUI
NO.	NO.
DUI NAME	
SPARE	756 017
SPARE	756 018
SPARE	756 019
SPARE	756 020
SPARE	756 021
SPARE	756 022
SPARE	756 023
SPARE	756 024
SPARE	756 025
SPARE	756 026
SPARE	756 027
SPARE	756 028
SPARE	756 029
SPARE	756 030
SPARE	756 031
SPARE	756 032
SPARE	756 033
SPARE	756 034
SPARE	756 035
SPARE	756 036
SPARE	756 037
SPARE	756 038
SPARE	756 039
SPARE	756 040
SPARE	756 041
SPARE	756 042
SPARE	756 043
SPARE	756 044
SPARE	756 045
SPARE	756 046
SPARE	756 047
SPARE	756 048
SPARE	756 049
SPARE	756 050
SPARE	756 051
SPARE	756 052
SPARE	756 053
SPARE	756 054
SPARE	756 055

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 15

DFI NO.	DUI NO.
SPARE	756 056
SPARE	756 057
SPARE	756 058
SPARE	756 059
SPARE	756 060
SPARE	756 061
SPARE	756 062
SPARE	756 063
SPARE	756 064
SPARE	756 065
SPARE	756 066
SPARE	756 067
SPARE	756 068
SPARE	756 069
RANGE, 1	757 001
VISIBILITY	757 013
TARGET RANGE	757 015
RANGE	757 016
DISUSED	758 001
DISUSED	758 002
DISUSED	758 003
DISUSED	758 004
DISUSED	758 005
DISUSED	758 006
DISUSED	758 007
DISUSED	758 008
DISUSED	758 009
DISUSED	758 010
DISUSED	758 011
DISUSED	758 012
DISUSED	758 013
DISUSED	758 014
DISUSED	758 015
DISUSED	758 016
DISUSED	758 017
DISUSED	758 018
DISUSED	758 019
DISUSED	758 020
DISUSED	758 021

APPENDIX B

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 16

DFI	DUI
NO.	NO.
DUI NAME	
DISUSED	758 022
DISUSED	758 023
DISUSED	758 024
DISUSED	758 025
DISUSED	758 026
DISUSED	758 027
DISUSED	758 028
DISUSED	758 029
DISUSED	758 030
DISUSED	758 031
DISUSED	758 032
DISUSED	758 033
DISUSED	758 034
DISUSED	758 035
DISUSED	758 036
DISUSED	758 037
DISUSED	758 038
DISUSED	758 039
DISUSED	758 040
DISUSED	758 041
DISUSED	758 042
DISUSED	758 043
DISUSED	758 044
DISUSED	758 045
DISUSED	758 046
DISUSED	758 047
DISUSED	758 048
DISUSED	758 049
DISUSED	758 050
DISUSED	758 051
DISUSED	758 052
DISUSED	758 053
DISUSED	758 054
DISUSED	758 055
DISUSED	758 056
DISUSED	758 057
DISUSED	758 058
DISUSED	758 059
DISUSED	758 060

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 17

DUI NAME	DFI NO.	DUI NO.
DISUSED	758	061
DISUSED	758	062
DISUSED	758	063
DISUSED	758	064
DISUSED	758	065
DISUSED	758	066
DISUSED	758	067
DISUSED	758	068
INDEX NUMBER, THIRD PARTY	768	001
INDEX NUMBER	768	002
INDEX NUMBER, A	768	003
INDEX NUMBER, B	768	004
INDEX NUMBER, C	768	005
INDEX NUMBER, D	768	006
INDEX NUMBER, E	768	007
INDEX NUMBER, F	768	008
INDEX NUMBER, G	768	009
INDEX NUMBER, RELATED	768	010
TRACK NUMBER, DEMAND	769	001
ORIGINATOR A		
TRACK NUMBER, REFERENCE	769	002
TRACK NUMBER, SOURCE	769	003
TRACK NUMBER, FRIENDLY WEAPON	769	004
TRACK NUMBER, TARGET	769	005
TRACK NUMBER, ADDRESSEE	769	006
TRACK NUMBER, RELATED	769	007
TRACK NUMBER, ASSOCIATED	769	008
TRACK NUMBER, ORIGIN	769	009
TRACK NUMBER, OBJECTIVE	769	010
TRACK NUMBER, JU 9	769	011
TRACK NUMBER, JU 10	769	012
TRACK NUMBER, JU 11	769	013
TRACK NUMBER, DEMAND	769	014
ORIGINATOR B		
TRACK NUMBER, INTERCOMMUNITY	769	015
COMMUNICANT		
TRACK NUMBER, ADDRESSEE 6	769	016
TRACK NUMBER, ADDRESSEE 1	769	017

APPENDIX B

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUI)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 18

DUI NAME	DFI NO.	DUI NO.
TRACK NUMBER, PREVIOUSLY REPORTED	769	018
TRACK NUMBER, ADDRESSEE 2	769	019
TRACK NUMBER, ADDRESSEE 3	769	020
TRACK NUMBER, ADDRESSEE 4	769	021
TRACK NUMBER, ADDRESSEE 5	769	022
TRACK NUMBER, JU 8	769	023
TRACK NUMBER, NEW CONTROL AGENCY	769	024
TRACK NUMBER, TARGET A	769	025
TRACK NUMBER, TARGET B	769	026
TRACK NUMBER, DEMAND ORIGINATOR C	769	027
TRACK NUMBER, SUBJECT	769	028
TRACK NUMBER, RETAINED	769	029
TRACK NUMBER, DROPPED	769	030
TRACK NUMBER, CONTROLLING AGENCY OF TN REFERENCE	769	031
TRACK NUMBER, JU 1	769	032
TRACK NUMBER, JU 2	769	033
TRACK NUMBER, JU 3	769	034
TRACK NUMBER, JU 4	769	035
TRACK NUMBER, JU 5	769	036
TRACK NUMBER, JU 6	769	037
TRACK NUMBER, JU 7	769	038
TRACK NUMBER, FLIGHT LEAD	769	039
TRACK NUMBER, RELATED 1	769	040
TRACK NUMBER, MISSION COMMANDER	769	041
TRACK NUMBER, INDEX ORIGINATOR	769	042
TRACK NUMBER, RELATED 3	769	043
TRACK NUMBER, RELATED 2	769	044
TRACK NUMBER, INDEX ORIGINATOR A	769	048
TRACK NUMBER, INDEX ORIGINATOR B	769	049
TRACK NUMBER, INDEX ORIGINATOR C	769	050

APPENDIX B

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 19

DFI	DUI
NO.	NO.
TRACK NUMBER, INDEX ORIGINATOR D	769 051
TRACK NUMBER, INDEX ORIGINATOR E	769 052
TRACK NUMBER, INDEX ORIGINATOR F	769 053
TRACK NUMBER, INDEX ORIGINATOR G	769 054
TRACK NUMBER, THREAT	769 055
TRACK NUMBER, JU	769 056
TRACK NUMBER, SECONDARY 1	769 057
TRACK NUMBER, SECONDARY 2	769 058
TRACK NUMBER, SECONDARY 3	769 059
TRACK NUMBER, SECONDARY 4	769 060
TRACK NUMBER, SPECIFIED	769 061
TRACK NUMBER, TARGETED	769 062
TRACK NUMBER, ORIGINATOR	769 063
TRACK NUMBER, DESTINATION	769 064
TRACK NUMBER, RELAY 1	769 065
TRACK NUMBER, RELAY 2	769 066
TRACK NUMBER, RELAY 3	769 067
TRACK NUMBER, RELAY 4	769 068
TRACK NUMBER, RELAY 5	769 069
TRACK NUMBER, RELAY 6	769 070
TRACK NUMBER, RELAY 7	769 071
LORAN FILTER SETTING	771 001
CLOUD COVER, 1	775 003
CLOUD COVER, 2	775 004
CLOUD COVER, 3	775 005
ADD/DELETE INDICATOR	777 001
QNH	789 001
QFE	789 002
HOURL	792 001
EFFECTIVE FROM HOURL	792 002
TIME OF OBSERVATION, HOURL	792 003
EXECUTE HOURL	792 007
ACKNOWLEDGEMENT DATA DESIGNATOR	795 001
ACKNOWLEDGEMENT DATA AMPLIFIER	796 001

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 20

DFI NO.	DUI NO.
EFFECTIVE FROM MINUTE	797 001
TIME OF EVENT, MINUTE	797 002
TIME OF OBSERVATION, MINUTE	797 003
MINUTE	797 004
EXECUTE MINUTES	797 007
BLOCK SIZE INDICATOR	798 001
SEQUENTIAL BLOCK/FIELD FLAG, 1	799 001
SEQUENTIAL BLOCK/FIELD FLAG, 2	799 002
SEQUENTIAL BLOCK/FIELD FLAG, 3	799 003
SEQUENTIAL BLOCK/FIELD FLAG, 4	799 004
SEQUENTIAL BLOCK/FIELD FLAG, 5	799 005
SEQUENTIAL BLOCK/FIELD FLAG, 6	799 006
SEQUENTIAL BLOCK/FIELD FLAG, 7	799 007
SEQUENTIAL BLOCK/FIELD FLAG, 8	799 008
SEQUENTIAL BLOCK/FIELD FLAG, 9	799 009
SEQUENTIAL BLOCK/FIELD FLAG, 10	799 010
SEQUENTIAL BLOCK/FIELD FLAG, 11	799 011
SEQUENTIAL BLOCK/FIELD FLAG, 12	799 012
SEQUENTIAL BLOCK/FIELD FLAG, 13	799 013
SEQUENTIAL BLOCK/FIELD FLAG, 14	799 014
SEQUENTIAL BLOCK/FIELD FLAG, 15	799 015
SEQUENTIAL BLOCK/FIELD FLAG, 16	799 016
SEQUENTIAL BLOCK/FIELD FLAG, 17	799 017
SEQUENTIAL BLOCK/FIELD FLAG, 18	799 018
SEQUENTIAL BLOCK/FIELD FLAG, 19	799 019
SEQUENTIAL BLOCK/FIELD FLAG, 20	799 020
SEQUENTIAL BLOCK/FIELD FLAG, 21	799 021

APPENDIX B

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 21

DUI NAME	DFI NO.	DUI NO.
SEQUENTIAL BLOCK/FIELD FLAG, 22	799	022
SEQUENTIAL BLOCK/FIELD FLAG, 23	799	023
SEQUENTIAL BLOCK/FIELD FLAG, 24	799	024
SEQUENTIAL BLOCK/FIELD FLAG, 25	799	025
SEQUENTIAL BLOCK/FIELD FLAG, 26	799	026
SEQUENTIAL BLOCK/FIELD FLAG, 27	799	027
SEQUENTIAL BLOCK/FIELD FLAG, 28	799	028
SEQUENTIAL BLOCK/FIELD FLAG, 29	799	029
SEQUENTIAL BLOCK/FIELD FLAG, 30	799	030
SEQUENTIAL BLOCK/FIELD FLAG, 31	799	031
SEQUENTIAL BLOCK/FIELD FLAG, 32	799	032
SEQUENTIAL BLOCK/FIELD FLAG, 33	799	033
SEQUENTIAL BLOCK/FIELD FLAG, 34	799	034
SEQUENTIAL BLOCK/FIELD FLAG, 35	799	035
SEQUENTIAL BLOCK/FIELD FLAG, 36	799	036
SEQUENTIAL BLOCK/FIELD FLAG, 37	799	037
SEQUENTIAL BLOCK/FIELD FLAG, 38	799	038
SEQUENTIAL BLOCK/FIELD FLAG, 39	799	039
SEQUENTIAL BLOCK/FIELD FLAG, 40	799	040

APPENDIX B

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 22

DFI NO.	DUI NO.
SEQUENTIAL BLOCK/FIELD FLAG, 41	799 041
SEQUENTIAL BLOCK/FIELD FLAG, 42	799 042
SEQUENTIAL BLOCK/FIELD FLAG, 43	799 043
SEQUENTIAL BLOCK/FIELD FLAG, 44	799 044
SEQUENTIAL BLOCK/FIELD FLAG, 45	799 045
SEQUENTIAL BLOCK/FIELD FLAG, 46	799 046
SEQUENTIAL BLOCK/FIELD FLAG, 47	799 047
SEQUENTIAL BLOCK/FIELD FLAG, 48	799 048
SEQUENTIAL BLOCK/FIELD FLAG, 49	799 049
SEQUENTIAL BLOCK/FIELD FLAG, 50	799 050
SEQUENTIAL BLOCK/FIELD FLAG, 51	799 051
SEQUENTIAL BLOCK/FIELD FLAG, 52	799 052
SEQUENTIAL BLOCK/FIELD FLAG, 53	799 053
SEQUENTIAL BLOCK/FIELD FLAG, 54	799 054
SEQUENTIAL BLOCK/FIELD FLAG, 55	799 055
SEQUENTIAL BLOCK/FIELD FLAG, 56	799 056
SEQUENTIAL BLOCK/FIELD FLAG, 57	799 057
SEQUENTIAL BLOCK/FIELD FLAG, 58	799 058
SEQUENTIAL BLOCK/FIELD FLAG, 59	799 059

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 23

DFI NO.	DUI NO.
SEQUENTIAL BLOCK/FIELD FLAG, 60	799 060
SEQUENTIAL BLOCK/FIELD FLAG, 61	799 061
SEQUENTIAL BLOCK/FIELD FLAG, 62	799 062
SEQUENTIAL BLOCK/FIELD FLAG, 63	799 063
SEQUENTIAL BLOCK/FIELD FLAG, 64	799 064
SEQUENTIAL BLOCK/FIELD FLAG, 65	799 065
SEQUENTIAL BLOCK/FIELD FLAG, 66	799 066
SEQUENTIAL BLOCK/FIELD FLAG, 67	799 067
SEQUENTIAL BLOCK/FIELD FLAG, 68	799 068
SEQUENTIAL BLOCK/FIELD FLAG, 69	799 069
SEQUENTIAL BLOCK/FIELD FLAG, 70	799 070
SEQUENTIAL BLOCK/FIELD FLAG, 71	799 071
SEQUENTIAL BLOCK/FIELD FLAG, 72	799 072
SEQUENTIAL BLOCK/FIELD FLAG, 73	799 073
SEQUENTIAL BLOCK/FIELD FLAG, 74	799 074
SEQUENTIAL BLOCK/FIELD FLAG, 75	799 075
SEQUENTIAL BLOCK/FIELD FLAG, 76	799 076
SEQUENTIAL BLOCK/FIELD FLAG, 77	799 077
SEQUENTIAL BLOCK/FIELD FLAG, 78	799 078

APPENDIX B

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 24

DUI NAME	DFI NO.	DUI NO.
SEQUENTIAL BLOCK/FIELD FLAG, 79	799	079
SEQUENTIAL BLOCK/FIELD FLAG, 80	799	080
SEQUENTIAL BLOCK/FIELD FLAG, 81	799	081
SEQUENTIAL BLOCK/FIELD FLAG, 82	799	082
SEQUENTIAL BLOCK/FIELD FLAG, 83	799	083
SEQUENTIAL BLOCK/FIELD FLAG, 84	799	084
SEQUENTIAL BLOCK/FIELD FLAG, 85	799	085
SEQUENTIAL BLOCK/FIELD FLAG, 86	799	086
SEQUENTIAL BLOCK/FIELD FLAG, 87	799	087
SEQUENTIAL BLOCK/FIELD FLAG, 88	799	088
SEQUENTIAL BLOCK/FIELD FLAG, 89	799	089
SEQUENTIAL BLOCK/FIELD FLAG, 90	799	090
SEQUENTIAL BLOCK/FIELD FLAG, 91	799	091
SEQUENTIAL BLOCK/FIELD FLAG, 92	799	092
SEQUENTIAL BLOCK/FIELD FLAG, 93	799	093
SEQUENTIAL BLOCK/FIELD FLAG, 94	799	094
SEQUENTIAL BLOCK/FIELD FLAG, 95	799	095
SEQUENTIAL BLOCK/FIELD FLAG, 96	799	096
SEQUENTIAL BLOCK/FIELD FLAG, 97	799	097

APPENDIX B

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 25

DUI NAME	DFI NO.	DUI NO.
SEQUENTIAL BLOCK/FIELD FLAG, 98	799	098
SEQUENTIAL BLOCK/FIELD FLAG, 99	799	099
SEQUENTIAL BLOCK/FIELD FLAG, 100	799	100
SEQUENTIAL BLOCK/FIELD FLAG, 101	799	101
SEQUENTIAL BLOCK/FIELD FLAG, 102	799	102
SEQUENTIAL BLOCK/FIELD FLAG, 103	799	103
SEQUENTIAL BLOCK/FIELD FLAG, 104	799	104
SEQUENTIAL BLOCK/FIELD FLAG, 105	799	105
SEQUENTIAL BLOCK/FIELD FLAG, 106	799	106
SEQUENTIAL BLOCK/FIELD FLAG, 107	799	107
MESSAGE LENGTH INDICATOR	800	001
MESSAGE NUMBER	800	002
MESSAGE COUNT	800	003
CRYPTOVARIABLE LOGICAL LABEL, REQUEST	801	001
CRYPTOVARIABLE LOGICAL LABEL NUMBER ONE, RELAY	801	002
CRYPTOVARIABLE LOGICAL LABEL NUMBER TWO, RELAY	801	003
CRYPTOVARIABLE LOGICAL LABEL, REKEY	801	004
CRYPTOVARIABLE LOGICAL LABEL SYNCHRONIZATION	801	005
CRYPTOVARIABLE LOGICAL LABEL, MSEC INITIALIZATION	801	006
CRYPTOVARIABLE LOGICAL LABEL A, TRANSEC	801	007
CRYPTOVARIABLE LOGICAL LABEL B, TRANSEC	801	008

APPENDIX B

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 26

DFI	DUI
NO.	NO.
CRYPTOVARIABLE LOGICAL LABEL	801 009
C, MSEC	
CRYPTOVARIABLE LOGICAL LABEL	801 010
D, MSEC	
CRYPTOVARIABLE LOGICAL LABEL	801 011
LOCATION, 0	
CRYPTOVARIABLE LOGICAL LABEL	801 012
LOCATION, 1	
CRYPTOVARIABLE LOGICAL LABEL	801 013
LOCATION, 2	
CRYPTOVARIABLE LOGICAL LABEL	801 014
LOCATION, 3	
CRYPTOVARIABLE LOGICAL LABEL	801 015
LOCATION, 4	
CRYPTOVARIABLE LOGICAL LABEL	801 016
LOCATION, 5	
CRYPTOVARIABLE LOGICAL LABEL	801 017
LOCATION, 6	
CRYPTOVARIABLE LOGICAL LABEL	801 018
LOCATION, 7	
CRYPTOVARIABLE LOGICAL LABEL	801 019
NUMBER ONE	
CRYPTOVARIABLE LOGICAL LABEL	801 020
NUMBER TWO	
CRYPTOMODE INDICATOR	802 001
CRYPTOMODE INDICATOR, RELAY	802 002
ACTION CODE, TIME SLOT	803 001
ASSIGNMENT	
ACTION CODE	803 002
AIR SPECIFIC TYPE	804 001
AIR AMBIGUOUS TYPE 1	804 002
AIR AMBIGUOUS TYPE 2	804 003
FUEL FUNCTION	806 001
SURFACE (MARITIME) SPECIFIC	808 001
TYPE	
SURFACE (MARITIME) AMBIGUOUS	808 002
TYPE 1	
SURFACE (MARITIME) AMBIGUOUS	808 003
TYPE 2	

APPENDIX B

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 27

DFI	DUI
NO.	NO.
DUI NAME	
SUBSURFACE (MARITIME) SPECIFIC TYPE	809 001
SUBSURFACE (MARITIME) AMBIGUOUS TYPE 1	809 002
SUBSURFACE (MARITIME) AMBIGUOUS TYPE 2	809 003
LAND (GROUND) SPECIFIC TYPE	810 001
LAND (GROUND) AMBIGUOUS TYPE 1	810 002
LAND (GROUND) AMBIGUOUS TYPE 2	810 003
THREAT WARNING ENVIRONMENT	814 001
MODE III IFF INTERROGATION	815 001
UNIVERSAL TRANSVERSE MERCATOR 100,000 METER SQUARE ROW	816 001
UNIVERSAL TRANSVERSE MERCATOR GRID ZONE COLUMN	818 001
UNIVERSAL TRANSVERSE MERCATOR 10-METER EASTING	819 001
UNIVERSAL TRANSVERSE MERCATOR 10-METER NORTHING	820 001
UNIVERSAL TRANSVERSE MERCATOR 100,000 METER SQUARE COLUMN	821 001
UNIVERSAL TRANSVERSE MERCATOR GRID ZONE ROW	825 001
TIME TAG, TIME OF VALIDITY	826 001
RADAR CHANNEL INDICATOR	828 001
PARTICIPATION GROUP, 1	838 002
PARTICIPATION GROUP, 2	838 003
PARTICIPATION GROUP	838 004
PARTICIPATION GROUP, 3	838 005
PARTICIPATION GROUP, 4	838 006
PPLI TRACK NUMBER AND IDENTITY INDICATOR	839 001
PPLI IFF/SIF INDICATOR	839 002
RELAY DELAY	843 001
OFFSET, VOICE B	843 005
RELAY DELAY, PPLI A	843 006
RELAY DELAY, CONTROL	843 007
RELAY DELAY, RECEIVE 1	843 010
RELAY DELAY, RECEIVE 2	843 011

APPENDIX B

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 28

DFI	DUI
NO.	NO.
	DUI NAME
844	RTT INTERROGATION TYPE 001
845	ACTIVE RUNWAY DIRECTION 002
847	TIME SLOT SET, NET STATUS 001
	PARTICIPATION GROUP
847	TIME SLOT SET, NEW 002
847	TIME SLOT SET, CURRENT 012
847	TIME SLOT SET 013
847	TIME SLOT SET, RTT-B 016
847	TIME SLOT SET, VOICE A 017
847	TIME SLOT SET, PPLI A 018
847	TIME SLOT SET, PPLI B 1 019
847	TIME SLOT SET, PPLI B 2 020
847	TIME SLOT SET, CONTROL 021
849	TYPE MODIFIER 002
850	RELAY CONTROL ACTION 003
852	RADAR CHANNEL 001
852	MISSILE CHANNEL 002
857	FUTURE EVENT DESCRIPTOR 001
863	RELAY FUNCTION 001
865	RELAY LABEL, DIRECTED 001
866	MEMORY LOCATION, REKEY 003
866	MEMORY LOCATION, REQUEST 004
875	CRYPTOPERIOD INDICATOR, REQUEST 002
876	ACTION CODE, OVER-THE-AIR REKEYING 001
878	FLIGHT DECK STATUS 001
885	CRYPTOVARIABLE, PART I 001
885	CRYPTOVARIABLE, PART II 002
885	CRYPTOVARIABLE, PART III 003
887	CRYPTOVARIABLE SYNCHRONIZATION BITS 001
889	TARGET TYPE 001
890	TARGET DEFENSES 002
891	TOTAL POINTS IN SERIES 001
892	PASSIVE/ACTIVE INDICATOR 001
893	COMMAND AND CONTROL INDICATOR 001
894	VOICE GROUP 001

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 29

DUI NAME	DFI NO.	DUI NO.
PARTICIPATION GROUP RELAY	896	001
ASSIGNMENT INDICATOR		
ACTION CODE, CRYPTOVARIABLE	897	001
VOICE FREQUENCY/CHANNEL	898	001
INDICATOR		
PROBABILITY OF KILL	1001	001
METHOD OF FIRE	1050	001
ENGAGEMENT COORDINATION ACTION	1075	001
VALUE		
ABSOLUTE VALUE OF COVARIANCE	1103	001
DATA ELEMENT 12		
ABSOLUTE VALUE OF COVARIANCE	1103	002
DATA ELEMENT 13		
ABSOLUTE VALUE OF COVARIANCE	1103	003
DATA ELEMENT 14		
ABSOLUTE VALUE OF COVARIANCE	1103	004
DATA ELEMENT 15		
ABSOLUTE VALUE OF COVARIANCE	1103	005
DATA ELEMENT 16		
ABSOLUTE VALUE OF COVARIANCE	1103	006
DATA ELEMENT 23		
ABSOLUTE VALUE OF COVARIANCE	1103	007
DATA ELEMENT 24		
ABSOLUTE VALUE OF COVARIANCE	1103	008
DATA ELEMENT 25		
ABSOLUTE VALUE OF COVARIANCE	1103	009
DATA ELEMENT 26		
ABSOLUTE VALUE OF COVARIANCE	1103	010
DATA ELEMENT 34		
ABSOLUTE VALUE OF COVARIANCE	1103	011
DATA ELEMENT 35		
ABSOLUTE VALUE OF COVARIANCE	1103	012
DATA ELEMENT 36		
ABSOLUTE VALUE OF COVARIANCE	1103	013
DATA ELEMENT 45		
ABSOLUTE VALUE OF COVARIANCE	1103	014
DATA ELEMENT 46		
ABSOLUTE VALUE OF COVARIANCE	1103	015
DATA ELEMENT 56		

APPENDIX B

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 30

DUI NAME	DFI NO.	DUI NO.
ABSOLUTE VALUE OF VELOCITY	1103	016
COVARIANCE DATA ELEMENT 23		
BALLISTIC MISSILE ACCELERATION	1104	001
BALLISTIC MISSILE BETA	1105	001
COVARIANCE DATA ELEMENT 11	1106	001
COVARIANCE DATA ELEMENT 22	1106	002
COVARIANCE DATA ELEMENT 33	1106	003
COVARIANCE DATA ELEMENT 44	1106	004
COVARIANCE DATA ELEMENT 55	1106	005
COVARIANCE DATA ELEMENT 66	1106	006
COVARIANCE INDICATOR	1107	001
LOST TRACK INDICATOR	1107	002
BOOST INDICATOR	1107	003
CONNECT/DISCONNECT	1107	004
DATA INDICATOR	1107	005
X POSITION IN WGS-84	1108	001
Y POSITION IN WGS-84	1108	002
Z POSITION IN WGS-84	1108	003
SIGMA X POSITION	1109	001
SIGMA Y POSITION	1109	002
SIGMA Z POSITION	1109	003
SIGMA X VELOCITY	1109	004
SIGMA Y VELOCITY	1109	005
SIGMA Z VELOCITY	1109	006
SIGN OF COVARIANCE DATA ELEMENT 12	1110	001
SIGN OF COVARIANCE DATA ELEMENT 13	1110	002
SIGN OF COVARIANCE DATA ELEMENT 14	1110	003
SIGN OF COVARIANCE DATA ELEMENT 15	1110	004
SIGN OF COVARIANCE DATA ELEMENT 16	1110	005
SIGN OF COVARIANCE DATA ELEMENT 23	1110	006
SIGN OF COVARIANCE DATA ELEMENT 24	1110	007

APPENDIX B

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 31

DFI	DUI
NO.	NO.
DUI NAME	
SIGN OF COVARIANCE DATA	1110 008
ELEMENT 25	
SIGN OF COVARIANCE DATA	1110 009
ELEMENT 26	
SIGN OF COVARIANCE DATA	1110 010
ELEMENT 34	
SIGN OF COVARIANCE DATA	1110 011
ELEMENT 35	
SIGN OF COVARIANCE DATA	1110 012
ELEMENT 36	
SIGN OF COVARIANCE DATA	1110 013
ELEMENT 45	
SIGN OF COVARIANCE DATA	1110 014
ELEMENT 46	
SIGN OF COVARIANCE DATA	1110 015
ELEMENT 56	
SIGN OF VELOCITY COVARIANCE	1110 016
DATA ELEMENT 12	
SIGN OF VELOCITY COVARIANCE	1110 017
DATA ELEMENT 13	
SIGN OF VELOCITY COVARIANCE	1110 018
DATA ELEMENT 23	
NUMBER/FREQUENCY OF UPDATES	1111 001
VELOCITY COVARIANCE DATA	1112 001
ELEMENT 11	
VELOCITY COVARIANCE DATA	1112 002
ELEMENT 12	
VELOCITY COVARIANCE DATA	1112 003
ELEMENT 13	
VELOCITY COVARIANCE DATA	1112 004
ELEMENT 22	
VELOCITY COVARIANCE DATA	1112 005
ELEMENT 23	
VELOCITY COVARIANCE DATA	1112 006
ELEMENT 33	
X VELOCITY IN WGS-84	1113 001
Y VELOCITY IN WGS-84	1113 002
Z VELOCITY IN WGS-84	1113 003
VARIANCE XX	1120 001

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 32

DFI	DUI
NO.	NO.
DUI NAME	
VARIANCE YY	1120 002
VARIANCE ZZ	1120 003
VARIANCE XY	1120 004
VARIANCE XZ	1120 005
VARIANCE YZ	1120 006
FREQUENCY AGILITY INDICATOR	1203 001
PDI INDICATOR	1204 001
PDI/MISSILE DATA LINK CHANNEL	1204 002
AIR-GROUND WEAPON DATA LINK CHANNEL	1206 001
ARM THREAT NUMBER	1207 001
ARM TYPE	1207 002
FUSION TYPE	1301 001
SENSOR TARGET REPORTING STATUS	1351 001
OBSERVER VELOCITY NORTH	1401 001
OBSERVER VELOCITY EAST	1401 002
OBSERVER VELOCITY DOWN	1401 003
VELOCITY, DOWN	1401 006
AGILE EMITTER	1502 001
FILTER UNIT TYPE	1520 001
EPOCH NUMBER, EXECUTION	1539 001
PATH QUALITY MONITORING	1540 001
PATH QUALITY THRESHOLD, 1	1540 002
PATH QUALITY THRESHOLD, 2	1540 003
MESSAGE RECEIVED INDICATOR	1541 001
NET CONTROL MESSAGE SEQUENCE NUMBER	1542 001
REPORT FORMAT INDICATOR	1543 001
TIMEOUT INTERVAL	1544 001
LANDING APPROACH CONDITION	1545 001
CRYPTOPERIOD DESIGNATOR, LOCATION 0	1546 001
CRYPTOPERIOD DESIGNATOR, LOCATION 1	1546 002
CRYPTOPERIOD DESIGNATOR, LOCATION 2	1546 003
CRYPTOPERIOD DESIGNATOR, LOCATION 3	1546 004

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 33

DUI NAME	DFI NO.	DUI NO.
CRYPTOPERIOD DESIGNATOR, LOCATION 4	1546	005
CRYPTOPERIOD DESIGNATOR, LOCATION 5	1546	006
CRYPTOPERIOD DESIGNATOR, LOCATION 6	1546	007
CRYPTOPERIOD DESIGNATOR, LOCATION 7	1546	008
CRYPTOPERIOD DESIGNATOR, CURRENT	1546	009
CRYPTOPERIOD DESIGNATOR, REKEY	1546	010
CRYPTOPERIOD DESIGNATOR, SYNCHRONIZATION	1546	011
UNIQUE VARIABLE UPDATE NUMBER	1548	001
CRYPTOSTATUS INFORMATION CODE	1549	001
WORD FORMAT	1550	001
CONTINUATION WORD LABEL	1551	001
SLOT ASSIGN INDEX NUMBER	1552	001
RESPONSE VALUE	1553	001
POINT/LINE/AREA DESCRIPTOR, 1	1554	002
SITE TYPE	1555	001
DATUM ERROR	1568	001
ACTIVE RELAY INDICATOR, WIDE AREA NETWORK	1571	002
ACTIVE RELAY INDICATOR, VOICE CHANNEL	1571	003
ACTIVE RELAY INDICATOR, CONTROL CHANNEL	1571	004
SAM MODE STATE	1576	001
ANTENNA SCAN RATE	1580	004
ANTENNA SCAN PERIOD	1580	005
NUMBER OF MISSILES	1599	001
OPERATIONAL IMPAIRMENT	1600	001
SIMULATION INDICATOR	1604	001
ACTION, TRACK MANAGEMENT	1606	001
ACTION, DATA UPDATE REQUEST	1606	002
ACTION, CORRELATE	1606	003
ACTION, POINTER	1606	004
ACTION, IFF/SIF MANAGEMENT	1606	006

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUI)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 34

DUI NAME	DFI NO.	DUI NO.
ACTION, FILTER MANAGEMENT	1606	007
ACTION, ASSOCIATION	1606	008
MODE I CODE APPLICABILITY	1610	001
MODE II CODE APPLICABILITY	1610	002
MODE III CODE APPLICABILITY	1610	003
MODE IV INDICATOR APPLICABILITY	1610	004
ELEVATION, 25 FT	1612	001
ELEVATION, 25 FT, 1	1612	002
ELEVATION, LSBS	1612	003
NETWORK PARTICIPATION STATUS INDICATOR	1613	001
DELTA EPOCH, 1	1615	002
DELTA EPOCH, 2	1615	003
DELTA EPOCH, 3	1615	004
DELTA EPOCH, 4	1615	005
DELTA EPOCH	1615	006
EPOCH NUMBER, DELTA CHANGE	1615	007
REALLOCATION POOL NUMBER	1616	001
DISPLACED POSITION INDICATOR	1619	001
SUMMATION INDICATOR	1621	001
SAM/SSM TYPE, 1	1622	001
SAM/SSM TYPE, 2	1622	002
SAM/SSM TYPE, 3	1622	003
TYPE OF STORES, 1	1623	001
TYPE OF STORES, 2	1623	002
TYPE OF STORES, 3	1623	003
TYPE OF STORES, 4	1623	004
TYPE OF STORES	1623	005
TYPE OF STORES, 5	1623	006
TYPE OF STORES, 6	1623	007
TYPE OF STORES, 7	1623	008
TYPE OF STORES, 8	1623	009
GUN CAPABLE	1624	001
NATO LINK 1 STATUS	1625	001
LINK 14 STATUS	1625	002
LINK 11 STATUS	1625	003
LINK 11B STATUS	1625	004
LINK 16 STATUS	1625	005

APPENDIX B

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 35

DUI NAME	DFI NO.	DUI NO.
ATDL 1 STATUS	1625	006
IJMS STATUS	1625	007
LINK 4 STATUS	1625	008
LINK 16 CONTROL STATUS	1625	009
LINK 4A CONTROL STATUS	1625	010
LINK 4C STATUS	1625	011
NONC2 JU-T0-NONC2 JU NPG	1625	012
STATUS A		
NONC2 JU-T0-NONC2 JU NPG	1625	013
STATUS B		
VMF STATUS	1625	014
MISSION ASSIGNMENT DISCRETE	1626	001
TRACKING STATUS	1627	001
BEACON CODE	1628	001
EMERGENCY TYPE	1641	001
POSITION ACCURACY	1642	001
PERSONNEL INVOLVED	1643	001
END POINT, 1	1645	002
END POINT, 2	1645	003
BAILOUT INDICATOR	1646	001
CONTROL CHANGE INDICATOR	1647	001
RADIO TYPE	1648	001
RADIO TYPE, 1	1648	002
RADIO TYPE, 2	1648	003
RADIO TYPE, 3	1648	004
SECURE RADIO INDICATOR	1649	001
SECURE RADIO INDICATOR, 1	1649	002
SECURE RADIO INDICATOR, 2	1649	003
SECURE RADIO INDICATOR, 3	1649	004
SQUAWK FLASH INDICATOR	1650	001
VECTOR DISCRETE	1651	001
COMMUNICATIONS IMPAIRMENT	1652	001
POINT NUMBER	1657	001
MODE OF DELIVERY	1658	001
TIME DISCRETE	1659	001
DELTA ELEVATION	1660	001
AIRCRAFT MODEL	1661	001
TYPE MODIFICATION	1661	002
IDENTITY CONFIDENCE	1663	001

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 36

DUI NAME	DFI NO.	DUI NO.
RADAR STATUS INDICATOR	1664	001
ELECTRONIC WARFARE SUPPORT, STATUS	1664	002
INFRARED STATUS INDICATOR	1664	003
LOW FREQUENCY ANALYSIS AND RECORDING STATUS	1664	004
MAGNETIC ANOMALY DETECTOR STATUS	1664	005
SEARCH LIGHT STATUS	1664	006
LOW LIGHT LEVEL TELEVISION STATUS	1664	007
DIFAR/CODAR STATUS	1664	008
ACTIVE SONOBUOY STATUS	1664	009
RECORDER STATUS, 1	1664	010
RECORDER STATUS, 2	1664	011
RECORDER STATUS, 3	1664	012
RECORDER STATUS, 4	1664	013
SONAR STATUS	1664	014
SPECIAL SONOBUOY STATUS, 1	1664	015
SPECIAL SONOBUOY STATUS, 2	1664	016
SPECIAL PROCESSOR STATUS, 1	1664	017
SPECIAL PROCESSOR STATUS, 2	1664	018
RADAR STATUS	1665	001
INFRARED STATUS	1665	002
IFF/SIF TRANSPONDER STATUS	1665	003
IFF/SIF INTERROGATOR STATUS	1665	004
LASER STATUS	1665	005
TELEVISION STATUS	1665	006
RADAR WARNING AND RECEIVING STATUS	1665	007
AIR-TO-AIR WEAPON RELEASE SYSTEM STATUS	1665	008
AIR-TO-GROUND WEAPON RELEASE SYSTEM STATUS	1665	009
PRIMARY SURVEILLANCE RADAR STATUS	1665	010
SECONDARY SURVEILLANCE RADAR STATUS	1665	011

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 37

DUI NAME	DFI NO.	DUI NO.
TERTIARY SURVEILLANCE RADAR STATUS	1665	012
ACQUISITION RADAR STATUS	1665	013
ILLUMINATING RADAR STATUS	1665	014
MODE IV INTERROGATOR STATUS	1665	015
COMMAND AND CONTROL SYSTEM	1665	016
DATA LINK AND DISPLAY SYSTEM	1665	017
NAVIGATION SYSTEM	1665	018
COMMUNICATION SYSTEM	1665	019
SURFACE SEARCH RADAR	1665	020
2D AIR SEARCH RADAR	1665	021
3D AIR SEARCH RADAR	1665	022
PRECISION APPROACH RADAR	1665	023
IFF/SIF INTERROGATOR AND TRANSPONDER SYSTEM	1665	024
SONAR SYSTEM	1665	025
ELECTRONIC ATTACK	1665	026
ELECTRONIC WARFARE SUPPORT AND OTHER ELECTRONIC ATTACK	1665	027
GUN FIRE CONTROL SYSTEM	1665	028
GUNS	1665	029
MISSILE, ROCKET, AND LAUNCHERS	1665	030
CRUISE MISSILES	1665	031
EMBARKED ASSAULT CRAFT	1665	032
ENERGY GENERATION SYSTEM-NUCLEAR	1665	033
ENERGY GENERATION SYSTEM-CONVENTIONAL	1665	034
AIRCRAFT HANDLING, LAUNCH, AND RECOVERY SYSTEMS	1665	035
FIGHTER AIRCRAFT	1665	036
ATTACK, STRIKE/FIGHTER AIRCRAFT	1665	037
FIXED WING ANTI-SUBMARINE WARFARE AIRCRAFT	1665	038
HELICOPTER ANTI-SUBMARINE WARFARE AIRCRAFT	1665	039
AIRBORNE EARLY WARNING AIRCRAFT	1665	040

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 38

DUI NAME	DFI NO.	DUI NO.
ELECTRONIC SUPPORT AIRCRAFT	1665	041
TANKER AIRCRAFT	1665	042
HELICOPTER SUPPORT AIRCRAFT	1665	043
COMPUTER STATUS	1665	044
MISSILE WARNING SYSTEM STATUS	1665	045
TELEMETRY POD SUBSYSTEM STATUS	1665	046
LASER SPOT TRACKER SUBSYSTEM STATUS	1665	047
GLOBAL POSITIONING SUBSYSTEM STATUS	1665	048
RECCE SYSTEM STATUS	1665	049
DEFENSIVE JAMMER SYSTEM 1 STATUS	1665	050
DEFENSIVE JAMMER SYSTEM 2 STATUS	1665	051
TORPEDO TUBE	1665	052
VERTICAL LAUNCHER	1665	053
FIRE CONTROL SYSTEM	1665	054
ACTIVE SONAR	1665	055
HULL MOUNTED PASSIVE SONAR	1665	056
TOWED ARRAY SONAR	1665	057
TOMAHAWK WEAPON CONTROL SYSTEM	1665	058
HARPOON WEAPON CONTROL SYSTEM	1665	059
RADIO STATUS, 1	1666	002
RADIO STATUS, 2	1666	003
RADIO STATUS, 3	1666	004
REPROMULGATION COUNTER	1668	001
REPROMULGATION COUNTER, ORIGINAL VALUE	1668	002
MISSION CORRELATOR CHANGE	1669	001
CONTROLLING UNIT STATUS	1670	001
REFERENCE POINT DATA REQUEST INDICATOR	1675	001
ELECTRONIC ATTACK DATA REQUEST INDICATOR	1675	003
ES DATA REQUEST INDICATOR	1675	004
WEAPON STATUS DATA REQUEST INDICATOR	1675	005
WEATHER DATA REQUEST INDICATOR	1675	006

APPENDIX B

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 39

DUI NAME	DFI NO.	DUI NO.
AMPLIFICATION DATA REQUEST INDICATOR	1675	007
FILTER DATA REQUEST INDICATOR	1675	008
ELECTRONIC WARFARE FIXES DATA REQUEST INDICATOR	1675	009
LASER ILLUMINATOR CODE	1676	001
SECURE DATA UNIT SERIAL NUMBER	1677	001
SECURE DATA UNIT IDENTIFICATION NUMBER	1677	003
CONTROL POSITIONS	1678	001
CONTROL POSITIONS, 1	1678	002
CONSOLE STATUS	1678	003
TIME FUNCTION	1681	001
TIME REPORT FUNCTION	1681	002
TIME FUNCTION, ASW	1681	003
TIME INDICATOR	1681	004
TIME FUNCTION, 1	1681	005
ALTITUDE AMPLIFICATION	1682	001
SEQUENCE NUMBER	1683	001
WAYPOINT ACTION/DESCRIPTOR	1705	001
SLAVED INDICATOR	1716	001
VOICE CALL SIGN INDICATOR	1717	001
LINK 4A ADDRESS INDICATOR	1718	001
SITE	1719	001
LINE/AREA CONTINUATION INDICATOR	1720	001
LINE/AREA CONTINUATION INDICATOR, 1	1720	002
PRECISION AIRCRAFT DIRECTION DISCRETE	1721	001
CONNECTIVITY QUALITY, 1	1725	001
CONNECTIVITY QUALITY, 2	1725	002
CONNECTIVITY QUALITY, 3	1725	003
CONNECTIVITY QUALITY, 4	1725	004
CONNECTIVITY QUALITY, 5	1725	005
CONNECTIVITY QUALITY, 6	1725	006
CONNECTIVITY QUALITY, 7	1725	007
CONNECTIVITY QUALITY, 8	1725	008
CONNECTIVITY QUALITY, 9	1725	009

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 40

DFI	DUI
NO.	NO.
DUI NAME	
CONNECTIVITY QUALITY, 10	1725 010
CONNECTIVITY QUALITY, 11	1725 011
CONNECTIVITY QUALITY,	1725 012
INTERCOMMUNITY COMMUNICANT	
CONNECTIVITY QUALITY, INTRA-	1725 013
COMMUNITY COMMUNICANT 1	
CONNECTIVITY QUALITY, INTRA-	1725 014
COMMUNITY COMMUNICANT 2	
CONNECTIVITY QUALITY, INTRA-	1725 015
COMMUNITY COMMUNICANT 3	
CONNECTIVITY QUALITY, INTRA-	1725 016
COMMUNITY COMMUNICANT 4	
CONNECTIVITY QUALITY, INTRA-	1725 017
COMMUNITY COMMUNICANT 5	
CONNECTIVITY QUALITY, INTRA-	1725 018
COMMUNITY COMMUNICANT 6	
CONNECTIVITY QUALITY, INTRA-	1725 019
COMMUNITY COMMUNICANT 7	
CONNECTIVITY QUALITY, INTRA-	1725 020
COMMUNITY COMMUNICANT 8	
CONNECTIVITY QUALITY, INTRA-	1725 021
COMMUNITY COMMUNICANT 9	
CONNECTIVITY QUALITY, INTRA-	1725 022
COMMUNITY COMMUNICANT 10	
CONNECTIVITY QUALITY, INTRA-	1725 023
COMMUNITY COMMUNICANT 11	
CONNECTIVITY QUALITY, INTRA-	1725 024
COMMUNITY COMMUNICANT 12	
CONNECTIVITY QUALITY, INTRA-	1725 025
COMMUNITY COMMUNICANT 13	
CONNECTIVITY QUALITY, INTRA-	1725 026
COMMUNITY COMMUNICANT 14	
CONNECTIVITY QUALITY, INTRA-	1725 027
COMMUNITY COMMUNICANT 15	
CONNECTIVITY QUALITY, INTRA-	1725 028
COMMUNITY COMMUNICANT 16	
CONNECTIVITY QUALITY, INTRA-	1725 029
COMMUNITY COMMUNICANT 17	

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 41

DUI NAME	DFI NO.	DUI NO.
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 18	1725	030
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 19	1725	031
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 20	1725	032
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 21	1725	033
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 22	1725	034
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 23	1725	035
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 24	1725	036
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 25	1725	037
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 26	1725	038
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 27	1725	039
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 28	1725	040
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 29	1725	041
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 30	1725	042
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 31	1725	043
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 32	1725	044
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 33	1725	045
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 34	1725	046
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 35	1725	047
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 36	1725	048

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 42

DUI NAME	DFI NO.	DUI NO.
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 37	1725	049
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 38	1725	050
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 39	1725	051
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 40	1725	052
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 41	1725	053
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 42	1725	054
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 43	1725	055
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 44	1725	056
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 45	1725	057
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 46	1725	058
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 47	1725	059
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 48	1725	060
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 49	1725	061
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 50	1725	062
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 51	1725	063
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 52	1725	064
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 53	1725	065
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 54	1725	066
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 55	1725	067

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 43

DUI NAME	DFI NO.	DUI NO.
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 56	1725	068
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 57	1725	069
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 58	1725	070
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 59	1725	071
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 60	1725	072
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 61	1725	073
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 62	1725	074
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 63	1725	075
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 64	1725	076
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 65	1725	077
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 66	1725	078
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 67	1725	079
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 68	1725	080
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 69	1725	081
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 70	1725	082
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 71	1725	083
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 72	1725	084
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 73	1725	085
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 74	1725	086

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 44

DUI NAME	DFI NO.	DUI NO.
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 75	1725	087
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 76	1725	088
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 77	1725	089
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 78	1725	090
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 79	1725	091
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 80	1725	092
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 81	1725	093
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 82	1725	094
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 83	1725	095
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 84	1725	096
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 85	1725	097
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 86	1725	098
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 87	1725	099
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 88	1725	100
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 89	1725	101
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 90	1725	102
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 91	1725	103
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 92	1725	104
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 93	1725	105

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 45

DUI NAME	DFI NO.	DUI NO.
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 94	1725	106
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 95	1725	107
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 96	1725	108
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 97	1725	109
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 98	1725	110
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 99	1725	111
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 100	1725	112
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 101	1725	113
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 102	1725	114
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 103	1725	115
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 104	1725	116
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 105	1725	117
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 106	1725	118
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 107	1725	119
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 108	1725	120
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 109	1725	121
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 110	1725	122
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 111	1725	123
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 112	1725	124

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 46

DUI NAME	DFI NO.	DUI NO.
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 113	1725	125
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 114	1725	126
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 115	1725	127
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 116	1725	128
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 117	1725	129
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 118	1725	130
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 119	1725	131
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 120	1725	132
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 121	1725	133
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 122	1725	134
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 123	1725	135
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 124	1725	136
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 125	1725	137
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 126	1725	138
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 127	1725	139
CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 128	1725	140
MINIMUM CONNECTIVITY QUALITY REQUESTED	1725	141
MAXIMUM CONNECTIVITY QUALITY PROVIDED	1725	142
CONNECTIVITY INTERROGATION INSTRUCTION	1726	001
ROUTE NUMBER	1727	001

APPENDIX B

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 47

DFI	DUI
NO.	NO.
DUI NAME	
ROUTE NUMBER, 2	1727 002
CONNECTIVITY STATUS	1728 001
INSTRUCTION	
CONNECTIVITY STATUS LEVEL	1729 001
RRIP, ROUTE 1	1734 001
RRIP, ROUTE 2	1734 002
RRIP, ROUTE 3	1734 003
RRIP, ROUTE 4	1734 004
RRIP, ROUTE 5	1734 005
RRIP, ROUTE 6	1734 006
RRIP, ROUTE 7	1734 007
RRIP, ROUTE 8	1734 008
RRIP, ROUTE 9	1734 009
RRIP, ROUTE 10	1734 010
RRIP, ROUTE 11	1734 011
RRIP, ROUTE 12	1734 012
RRIP, ROUTE 13	1734 013
RRIP, ROUTE 14	1734 014
RRIP, ROUTE 15	1734 015
IRIP, ROUTE 1	1735 001
IRIP, ROUTE 2	1735 002
IRIP, ROUTE 3	1735 003
IRIP, ROUTE 4	1735 004
IRIP, ROUTE 5	1735 005
IRIP, ROUTE 6	1735 006
IRIP, ROUTE 7	1735 007
IRIP, ROUTE 8	1735 008
IRIP, ROUTE 9	1735 009
IRIP, ROUTE 10	1735 010
IRIP, ROUTE 11	1735 011
IRIP, ROUTE 12	1735 012
IRIP, ROUTE 13	1735 013
IRIP, ROUTE 14	1735 014
IRIP, ROUTE 15	1735 015
ACTION/INFORMATION INDICATOR,	1740 004
4	
AF PROPRIETARY FORMAT	1743 001
PROPRIETARY INFORMATION	1744 001

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 48

DUI NAME	DFI NO.	DUI NO.
ENV/CAT UNKNOWN FILTER INDICATOR	1745	001
ENV/CAT SPACE FILTER INDICATOR	1745	002
ENV/CAT AIR FILTER INDICATOR	1745	003
ENV/CAT SURFACE (MARITIME) FILTER INDICATOR	1745	004
ENV/CAT SUBSURFACE (MARITIME) FILTER INDICATOR	1745	005
ENV/CAT LAND (GROUND) POINT FILTER INDICATOR	1745	006
ENV/CAT LAND (GROUND) TRACK FILTER INDICATOR	1745	007
SPARE ENV/CAT FILTER INDICATOR	1745	008
SPECIAL PROCESSING FILTER INDICATOR	1745	009
SIMULATION FILTER INDICATOR	1745	010
ELECTRONIC WARFARE FILTER INDICATOR	1745	013
REFERENCE POINT FILTER INDICATOR	1745	014
PENDING IDENTITY FILTER INDICATOR	1745	015
UNKNOWN IDENTITY FILTER INDICATOR	1745	016
ASSUMED FRIEND IDENTITY FILTER INDICATOR	1745	017
FRIEND IDENTITY FILTER INDICATOR	1745	018
NEUTRAL IDENTITY FILTER INDICATOR	1745	019
SUSPECT IDENTITY FILTER INDICATOR	1745	020
HOSTILE IDENTITY FILTER INDICATOR	1745	021
SPARE IDENTITY FILTER INDICATOR	1745	022
FILTER NUMBER	1747	001
GEOGRAPHIC AREA FILTERED	1748	001
CONTROLLING UNIT INDICATOR	1750	001

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 49

DFI	DUI
NO.	NO.
DUI NAME	
ALERT STATUS CHANGE	1751 001
SPECIAL CODE I	1752 001
SPECIAL CODE II	1752 002
SPECIAL CODE III	1752 003
THREAT TYPE	1762 002
ESTIMATED YIELD	1767 001
TYPE OF BURST	1768 001
ACTION, COMMUNICATION CONTROL	1769 001
TRANSMISSION TERMINATION	1770 001
DESIGNATOR	
ACTION, TIME SLOT REQUEST	1771 001
ACCESS DESCRIPTION	1772 001
ACCESS RATE, RTT-B	1772 002
ACCESS RATE, PPLI A	1772 003
ACCESS RATE, PPLI B	1772 004
COMMUNITY DESIGNATOR	1774 001
COMMUNITY DESIGNATOR,	1774 002
INTERCOMMUNITY COMMUNICANT	
RELAY LEVEL	1775 001
RELAY LEVEL, OWN NET CONTROL	1775 002
STATION	
RELAY LEVEL, INTERCOMMUNITY	1775 003
COMMUNICANT	
REPROMULGATION RELAY STATE	1776 001
CONNECTIVITY MONITOR, ENABLE	1777 001
REPROMULGATION ORIGINATION	1778 001
CONTROL	
INITIAL ENTRY INDICATOR	1779 001
COMMUNICANT STATUS UPDATE	1780 001
INDICATOR	
INDEX NUMBER, SET	1781 001
INDEX NUMBER, NEW SET	1781 002
PARTICIPANT INDEX NUMBER	1782 001
ALLOCATED PG INDEX NUMBER	1783 001
ROUTE NUMBER, RELAY	1784 001
OWN NET CONTROL STATION STATUS	1786 001
RESPONSE TIME	1787 001
ASSIGN/DEASSIGN INDICATOR	1788 001

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 50

DUI NAME	DFI NO.	DUI NO.
NEEDLINE PARTICIPATION GROUP STATUS, 1	1789	001
NEEDLINE PARTICIPATION GROUP STATUS, 2	1789	002
NEEDLINE PARTICIPATION GROUP STATUS AMPLIFY, 1	1790	001
NEEDLINE PARTICIPATION GROUP STATUS AMPLIFY, 2	1790	002
TEST DURATION COUNT, 1	1791	001
TEST DURATION COUNT, 2	1791	002
ASSIGN/DEASSIGN UNIT DESIGNATOR	1792	001
UNIT DESIGNATOR	1793	001
AIR PLATFORM	1797	001
SURFACE (MARITIME) PLATFORM	1797	002
SUBSURFACE (MARITIME) PLATFORM	1797	003
LAND (GROUND) PLATFORM	1797	004
SPACE PLATFORM	1797	005
AIR PLATFORM ACTIVITY	1798	001
SURFACE (MARITIME) PLATFORM ACTIVITY	1798	002
SUBSURFACE (MARITIME) PLATFORM ACTIVITY	1798	003
LAND (GROUND) PLATFORM ACTIVITY	1798	004
SPACE PLATFORM ACTIVITY	1798	005
PLATFORM TYPE	1802	001
ELECTRONIC WARFARE ACTION VALUE	1803	001
REFERENCE ELECTRONIC WARFARE ACTION VALUE	1803	003
SECTOR WIDTH	1804	001
SECTOR/AREA/LOCATION INDICATOR	1805	001
AXIS ORIENTATION	1806	001
AXIS ORIENTATION, 1	1806	002
AXIS ORIENTATION, 2	1806	003
PERIODICITY OF REPORT	1808	001
REQUEST NUMBER	1809	001
BEARING ORIGIN	1811	001

APPENDIX B

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 51

DFI	DUI
NO.	NO.
DUI NAME	
PARAMETER SOURCE	1812 001
TASK PRIORITY	1816 001
PRIORITY	1816 002
RADIATION STATUS INDICATOR	1818 001
FREQUENCY/FREQUENCY RANGE	1819 001
INDICATOR	
FREQUENCY MULTIPLIER, 1	1820 003
FREQUENCY MULTIPLIER, 2	1820 004
WARTIME RESERVE MODE INDICATOR	1821 001
EMISSION CONTROL PLAN	1822 001
PLAN MODIFICATION	1824 001
RADIATION RESTRICTION	1825 001
CHANGE RADIATION FACTOR	1826 001
CIRCUIT	1827 001
AUTOMATIC ELECTRONIC ATTACK	1833 001
NEGATION	
TIME SHARING IMPLEMENTATION	1834 001
PLAN SOURCE	1836 001
IMMEDIATE ACTION INDICATOR	1839 001
TIME DURATION	1840 001
EMITTER FUNCTION	1843 001
DECOY MISSION	1847 001
DECOY TYPE	1848 001
MODULATION CODE	1849 001
CALLSIGN, OBSERVED	1850 001
CALLSIGN, PUBLISHED	1850 002
CHARACTER #1	1851 001
CHARACTER #2	1851 002
CHARACTER #3	1851 003
CHARACTER #4	1851 004
CHARACTER #5	1851 005
CHARACTER #6	1851 006
CHARACTER #7	1851 007
CHARACTER #8	1851 008
CHARACTER #9	1851 009
CHARACTER #10	1851 010
CHARACTER #11	1851 011
CHARACTER #12	1851 012
CHARACTER #13	1851 013

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 52

DUI NAME	DFI NO.	DUI NO.
CHARACTER #14	1851	014
CHARACTER #15	1851	015
CHARACTER #16	1851	016
CHARACTER #17	1851	017
CHARACTER #18	1851	018
CHARACTER #19	1851	019
CHARACTER #20	1851	020
ELEVATION ANGLE/ALTITUDE INDICATOR	1852	001
IDENTITY DIFFERENCE INDICATOR	1860	001
SPECIAL INTEREST INDICATOR	1861	001
CORRELATION INDICATOR, TN/IN	1862	001
CORRELATION INDICATOR, A	1862	002
CORRELATION INDICATOR, B	1862	003
CORRELATION INDICATOR, C	1862	004
CORRELATION INDICATOR, D	1862	005
CORRELATION INDICATOR, E	1862	006
CORRELATION INDICATOR, F	1862	007
CORRELATION INDICATOR, G	1862	008
POINTER	1863	001
ORIGIN OF INDEX NUMBER	1864	001
AIRFIELD STATUS	1865	001
AIR RAID STATE	1866	001
NUCLEAR CONTAMINATION INDICATOR	1867	001
BIOLOGICAL CONTAMINATION INDICATOR	1867	002
CHEMICAL CONTAMINATION INDICATOR	1867	003
ICAO CODE	1868	001
BASE WEATHER STATE	1869	001
CRASH SERVICE	1870	002
NITROGEN	1870	003
LIQUID OXYGEN	1870	004
AVTUR	1870	005
SHORADEZ	1871	001
AIM-9L AIR-TO-AIR MISSILE	1872	002
SKY FLASH AIR-TO-AIR MISSILE	1872	006
AMRAAM AIR-TO-AIR MISSILE	1872	007

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 53

DUI NAME	DFI NO.	DUI NO.
ASRAAM AIR-TO-AIR MISSILE	1872	008
DURANDAL AIR-TO-SURFACE MISSILE	1872	009
BAP 100 AIR-TO-SURFACE MISSILE	1872	010
TBD AIR-TO-SURFACE MISSILE	1872	011
TBD AIR-TO-SURFACE MISSILE	1872	012
TBD AIR-TO-SURFACE MISSILE	1872	013
TBD AIR-TO-SURFACE MISSILE	1872	014
ANTI-SUBMARINE DEPTH CHARGE	1872	015
NDB	1872	016
CONVENTIONAL 500 POUND BOMB	1872	017
CONVENTIONAL 1000 POUND BOMB	1872	018
20 MILLIMETER AMMUNITION	1872	019
27 MILLIMETER AMMUNITION	1872	020
30 MILLIMETER AMMUNITION	1872	021
MAGIC I AIR-TO-AIR MISSILE	1872	022
MAGIC II AIR-TO-AIR MISSILE	1872	023
SUPER 530 AIR-TO-AIR MISSILE	1872	024
SUPER 530D AIR-TO-AIR MISSILE	1872	025
MICA AIR-TO-AIR MISSILE	1872	026
AIM-9M AIR-TO-AIR MISSILE	1872	027
AIM-9P AIR-TO-AIR MISSILE	1872	028
TBD AIR-TO-AIR MISSILE	1872	029
TBD AIR-TO-AIR MISSILE	1872	030
TBD AIR-TO-AIR MISSILE	1872	031
TBD AIR-TO-AIR MISSILE	1872	032
ACTIVE RUNWAY GCA/FLIGHT DECK PAR	1873	003
ACTIVE RUNWAY APPROACH LIGHTING	1873	005
ACTIVE RUNWAY ILS/FLIGHT DECK PRECISION APPROACH AID (MADGE)	1873	007
ACTIVE RUNWAY ARRESTER BARRIER	1873	009
ACTIVE RUNWAY ARRESTER WIRES	1873	011
FLIGHT DECK GLIDE PATH INDICATOR	1873	013
ACTIVE RUNWAY STATUS	1874	001
ACTIVE RUNWAY AVAILABLE LENGTH	1875	001
ACTIVE RUNWAY BRAKING ACTION	1886	001

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 54

DFI	DUI
NO.	NO.
DUI NAME	
WIND SHEAR INDICATOR	1887 001
SECONDARY RUNWAY INDICATOR	1888 001
DIVE ANGLE	1890 001
NUMBER OF AIRCRAFT	1898 001
MISSION COMMANDER INDICATOR	1901 001
PULSE REPETITION INTERVAL	1903 001
TRACK IDENTIFIER	1906 001
ROUTE NUMBER, 1	1916 001
ID/STRENGTH INDICATOR	1926 001
JAMMER TYPE	1933 001
RECCE SYSTEM TYPE	1934 001
DEFENSIVE JAMMER SYSTEM 1 TYPE	1934 002
DEFENSIVE JAMMER SYSTEM 2 TYPE	1934 003
DISSEMINATION MODE INDICATOR, OWN	1936 001
DISSEMINATION MODE INDICATOR, A	1936 002
DISSEMINATION MODE INDICATOR, WORD	1936 003
RADAR PRF	1943 001
TABLE POSITION NUMBER, OWN	1946 001
TABLE POSITION NUMBER, A	1946 002
TABLE SEGMENT	1946 003
SENSOR TYPE	1953 001
DEMAND, OWN	1956 001
DEMAND, A	1956 002
DEMAND, B	1956 003
DEMAND, C	1956 004
DEMAND, D	1956 005
DEMAND, E	1956 006
FREQUENCY EXPONENT	1963 001
RECEIVE COUNT, OWN	1966 001
RECEIVE COUNT, A	1966 002
RECEIVE COUNT, B	1966 003
RECEIVE COUNT, C	1966 004
RECEIVE COUNT, D	1966 005
RECEIVE COUNT, E	1966 006
LAUNCH CAPABILITY	1973 001
HOP COUNT, A	1976 001

APPENDIX B

TABLE B-4. NUMERICAL LIST OF DATA USE IDENTIFIERS (DUIS)
WITHIN DATA FIELD IDENTIFIER (DFI)

SHEET 55

DUI NAME	DFI	DUI
	NO.	NO.
HOP COUNT, B	1976	002
HOP COUNT, C	1976	003
HOP COUNT, D	1976	004
HOP COUNT, E	1976	005
TIME TAG, A	1986	001
TIME TAG, B	1986	002
TIME TAG, C	1986	003
TIME TAG, D	1986	004
TIME TAG, E	1986	005

DFI	NAME	DEFINITION
264	VOICE CALL	AN ALPHANUMERICALLY-CODED CALL SIGN USED IN VOICE COMMUNICATIONS TO IDENTIFY A FORCE ELEMENT. THE CALL SIGN CONSISTS OF FOUR CHARACTERS CODED AS SIX BITS PER CHARACTER, EACH OF WHICH MAY REPRESENT EITHER A LETTER OF THE ALPHABET OR A DECIMAL NUMBER 0-9.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
001 VOICE CALL SIGN [24 BIT]	AN ALPHANUMERICALLY-CODED CALL SIGN USED IN VOICE COMMUNICATIONS TO IDENTIFY A FORCE ELEMENT.	J2.2C2 J2.5C1 J10.3E0	J2.3C2 J2.6C1 J10.5I	J2.4C2 J9.0C1
003 VOICE CALL SIGN, NEW CONTROL AGENCY [24 BIT]	AN ALPHANUMERICALLY-CODED CALL SIGN USED IN VOICE COMMUNICATIONS TO IDENTIFY THE NEW CONTROL AGENCY.	J12.4E0		

DATA ITEM	BIT CODE	EXPLANATION
-----------	----------	-------------

----- FOR DUI 001 AND 003 -----

THE 24 BITS ARE DIVIDED INTO FOUR GROUPS OF 6 BITS. EACH GROUP IS INTERPRETED INDEPENDENTLY IN ACCORDANCE WITH THE FOLLOWING CODE:

BLANK	0
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
A	10
B	11
C	12
D	13
E	14
F	15
G	16
H	17

APPENDIX B

DFI NAME
264 VOICE CALL

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
I	18	
J	19	
K	20	
L	21	
M	22	
N	23	
O	24	
P	25	
Q	26	
R	27	
S	28	
T	29	
U	30	
V	31	
W	32	
X	33	
Y	34	
Z	35	
UNDEFINED	36 THROUGH 62	
0 (ZERO)	63	

DFI NAME DEFINITION
265 MESSAGE TYPE IDENTIFIES THE BASIC STRUCTURE OF THE MESSAGE AS A FUNCTION OF THE DEGREE OF APPLIED ERROR-CODING AND THE MESSAGE LENGTH IN NUMBER OF BITS.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
002 TIME SLOT TYPE [3 BIT]	WHEN INTERPRETED WITH THE TYPE MOD- IFICATION FIELD, THIS FIELD DE- SCRIBES THE CHARACTERISTICS OF A TIME SLOT.	HEADER RTT-A RTT-B
DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 002 -----		
TYPE 0	0	1. WHEN THE TYPE MODIFICATION IS ZERO AND THE HEADER IS INTER- LEAVED, THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS: (A) MESSAGE PACKAGE STRUCTURE: STANDARD DOUBLE PULSE. (B) MESSAGE FORMAT: FREE TEXT. (C) ERROR CORRECTION CODING: UNCODED. 2. WHEN THE TYPE MODIFICATION IS ONE AND THE HEADER IS INTERLEAVED, THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS: (A) MESSAGE PACKAGE STRUCTURE: PACKED 2 SINGLE-PULSE. (B) MESSAGE FORMAT: FREE TEXT. (C) ERROR CORRECTION CODING: UNCODED.
TYPE 1	1	1. WHEN THE TYPE MODIFICATION IS ZERO AND THE HEADER IS INTER- LEAVED, THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS: (A) MESSAGE PACKAGE STRUCTURE: PACKED 2 DOUBLE PULSE. (B) MESSAGE FORMAT: FREE TEXT. (C) ERROR CORRECTION CODING: UNCODED. 2. WHEN THE TYPE MODIFICATION IS

APPENDIX B

DFI	NAME			
265	MESSAGE TYPE			
	DATA ITEM (CONTINUED) (CONTINUED)	BIT CODE	EXPLANATION	
			ONE AND THE HEADER IS INTER- LEAVED, THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS: (A) MESSAGE PACKAGE STRUCTURE: PACKED 4 SINGLE PULSE. (B) MESSAGE FORMAT: FREE TEXT. (C) ERROR CORRECTION CODING: UNCODED.	
	TYPE 2	2	1. WHEN THE TYPE MODIFICATION IS ZERO AND THE HEADER IS INTER- LEAVED, THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS: (A) MESSAGE PACKAGE STRUCTURE: PACKED 2 DOUBLE PULSE. (B) MESSAGE FORMAT: FREE TEXT. (C) ERROR CORRECTION CODING: CODED. 2. WHEN THE TYPE MODIFICATION IS ONE AND THE HEADER IS INTERLEAVED, THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS: (A) MESSAGE PACKAGE STRUCTURE: PACKED 4 SINGLE PULSE. (B) MESSAGE FORMAT: FREE TEXT. (C) ERROR CORRECTION CODING: CODED. 3. WHEN THE TYPE MODIFICATION IS ZERO AND THE HEADER IS NOT INTER- LEAVED, THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS: (A) MESSAGE PACKAGE STRUCTURE: RTT. (B) MESSAGE FORMAT: ADDRESSED. (C) ERROR CORRECTION CODING: CODED. 4. WHEN THE TYPE MODIFICATION IS ONE AND THE HEADER IS NOT INTER- LEAVED, THE TIME SLOT HAS THE FOLLOWING CHARACTERISTICS: (A) MESSAGE PACKAGE STRUCTURE: RTT.	

DFI NAME
265 MESSAGE TYPE

DATA ITEM (CONTINUED)
(CONTINUED)

BIT CODE

EXPLANATION

TYPE 3

3

(B) MESSAGE FORMAT: BROADCAST.
(C) ERROR CORRECTION CODING:
CODED.
THE TIME SLOT HAS THE
FOLLOWING CHARACTERISTICS:
(A) MESSAGE PACKAGE STRUCTURE:
PACKED 2 SINGLE PULSE.
(B) MESSAGE FORMAT: FIXED
FORMAT.
(C) ERROR CORRECTION CODING:
CODED.

TYPE 4

4

THE TIME SLOT HAS THE
FOLLOWING CHARACTERISTICS:
(A) MESSAGE PACKAGE STRUCTURE:
STANDARD DOUBLE PULSE.
(B) MESSAGE FORMAT: FIXED
FORMAT.
(C) ERROR CORRECTION CODING:
CODED.

TYPE 5

5

THE TIME SLOT HAS THE
FOLLOWING CHARACTERISTICS:
(A) MESSAGE PACKAGE STRUCTURE:
PACKED 2 DOUBLE PULSE.
(B) MESSAGE FORMAT: FIXED
FORMAT.
(C) ERROR CORRECTION CODING:
CODED.

TYPE 6

6

1. WHEN THE TYPE MODIFICATION IS
ZERO AND THE HEADER IS INTER-
LEAVED, THE TIME SLOT HAS THE
FOLLOWING CHARACTERISTICS:
(A) MESSAGE PACKAGE STRUCTURE:
STANDARD DOUBLE PULSE.
(B) MESSAGE FORMAT: FREE TEXT.
(C) ERROR CORRECTION CODING:
CODED.
2. WHEN THE TYPE MODIFICATION IS
ONE AND THE HEADER IS INTERLEAVED,
THE TIME SLOT HAS THE FOLLOWING
STRUCTURE:
(A) MESSAGE PACKAGE STRUCTURE:

DFI NAME
265 MESSAGE TYPE

DATA ITEM (CONTINUED)
(CONTINUED)

BIT CODE

TYPE 7

7

EXPLANATION

PACKED 2 SINGLE PULSE.

(B) MESSAGE FORMAT: FREE TEXT.

(C) ERROR CORRECTION CODING:
CODED.

THE TIME SLOT HAS THE

FOLLOWING CHARACTERISTICS:

(A) MESSAGE PACKAGE STRUCTURE:
PACKED 4 SINGLE PULSE.

(B) MESSAGE FORMAT: FIXED
FORMAT.

(C) ERROR CORRECTION CODING:
CODED.

DFI NAME
266 EMITTER NUMBER INDICATOR

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
001 EMITTER NUMBER INDICATOR [3 BIT]	EMITTER NUMBER INDICATOR IS USED WITH THE EMITTER NUMBER FIELD TO INDICATE WHICH DATABASE THE EMITTER NUMBER IS ASSOCIATED WITH.	J3.7C3	J14.0C3	J14.2C3

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
DO NOT INTERPRET EMITTER NUMBER FIELD	0	
INTERPRET EMITTER NUMBER FIELD AS NATO SPOT NUMBER	1	
UNDEFINED	2 THROUGH 7	

B-152

MIL-STD-6016B
APPENDIX B

APPENDIX B

DFI	NAME	DEFINITION
267	SPECIFIC TYPE INDICATOR	INDICATES WHETHER PLATFORM/PLATFORM ACTIVITY OR SPECIFIC TYPE IS BEING REPORTED.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 LAND (GROUND) SPECIFIC TYPE INDICATOR [1 BIT] (LST IND)	INDICATES WHETHER LAND (GROUND) PLATFORM/LAND (GROUND) PLATFORM ACTIVITY OR LAND (GROUND) SPECIFIC TYPE IS BEING REPORTED.	J3.5C1
002 AIR SPECIFIC TYPE INDICATOR [1 BIT] (AST IND)	INDICATES WHETHER AIR PLATFORM/AIR PLATFORM ACTIVITY OR AIR SPECIFIC TYPE IS BEING REPORTED.	J3.2C1
003 SPACE SPECIFIC TYPE INDICATOR [1 BIT] (SST IND)	INDICATES WHETHER SPACE PLATFORM/SPACE PLATFORM ACTIVITY OR SPACE SPECIFIC TYPE IS BEING REPORTED.	J3.6I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
LAND (GROUND) PLATFORM/ LAND (GROUND) PLATFORM ACTIVITY BEING REPORTED	0	
LAND (GROUND) SPECIFIC TYPE BEING REPORTED	1	
----- FOR DUI 002 -----		
AIR PLATFORM/AIR PLATFORM ACTIVITY BEING REPORTED	0	
AIR SPECIFIC TYPE BEING REPORTED	1	
----- FOR DUI 003 -----		
SPACE PLATFORM/SPACE PLATFORM ACTIVITY BEING REPORTED.	0	

DFI	NAME	BIT CODE	EXPLANATION
267	SPECIFIC TYPE INDICATOR	1	
	DATA ITEM (CONTINUED)		
	SPACE SPECIFIC TYPE		
	BEING REPORTED		

DFI NAME
268 ES FREQUENCY BAND STATUS

DEFINITION
INDICATES THE ABILITY OF ANY ES EQUIPMENT TO OPERATE IN THE
FREQUENCY BAND(S) OR FREQUENCY RANGE(S) SPECIFIED.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
001 ES FREQUENCY BAND A [2 BIT] (ES A)	INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 0 THROUGH 250 MHZ.	J13.2C4 J13.5C2	J13.3C3	J13.4C2
002 ES FREQUENCY BAND B [2 BIT] (ES B)	INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 250 THROUGH 500 MHZ.	J13.2C4 J13.5C2	J13.3C3	J13.4C2
003 ES FREQUENCY BAND C [2 BIT] (ES C)	INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 500 THROUGH 1000 MHZ.	J13.2C4 J13.5C2	J13.3C3	J13.4C2
004 ES FREQUENCY BAND D [2 BIT] (ES D)	INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 1000 THROUGH 2000 MHZ.	J13.2C4 J13.5C2	J13.3C3	J13.4C2
005 ES FREQUENCY BAND E [2 BIT] (ES E)	INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 2000 THROUGH 3000 MHZ.	J13.2C4 J13.5C2	J13.3C3	J13.4C2
006 ES FREQUENCY BAND F [2 BIT] (ES F)	INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 3000 THROUGH 4000 MHZ.	J13.2C4 J13.5C2	J13.3C3	J13.4C2
007 ES FREQUENCY BAND G [2 BIT] (ES G)	INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 4000 THROUGH 6000 MHZ.	J13.2C4 J13.5C2	J13.3C3	J13.4C2
008 ES FREQUENCY BAND H [2 BIT] (ES H)	INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 6000 THROUGH 8000 MHZ.	J13.2C4 J13.5C2	J13.3C3	J13.4C2
009 ES FREQUENCY BAND I [2 BIT] (ES I)	INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 8000 THROUGH 10,000 MHZ.	J13.2C4 J13.5C2	J13.3C3	J13.4C2
010 ES FREQUENCY BAND J [2 BIT] (ES J)	INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 10,000	J13.2C4 J13.5C2	J13.3C3	J13.4C2

DFI NAME
268 ES FREQUENCY BAND STATUS

DUI NAME	EXPLANATION	APPLICABILITY		
010 (CONTINUED)	THROUGH 20,000 MHZ.			
011 ES FREQUENCY BAND K [2 BIT] (ES K)	INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 20,000 THROUGH 40,000 MHZ.	J13.2C4 J13.5C2	J13.3C3	J13.4C2
012 ES FREQUENCY BAND L [2 BIT] (ES L)	INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 40,000 THROUGH 60,000 MHZ.	J13.2C4 J13.5C2	J13.3C3	J13.4C2
013 ES FREQUENCY BAND M [2 BIT] (ES M)	INDICATES THE STATUS OF ES EQUIPMENT IN THE FREQUENCY RANGE OF 60,000 THROUGH 100,000 MHZ.	J13.2C4 J13.5C2	J13.3C3	J13.4C2
014 HF DIRECTION FINDER [2 BIT] (HF DF)	INDICATES THE STATUS OF DIRECTION FINDER EQUIPMENT IN THE HF RANGE.	J13.2C4 J13.5C2	J13.3C3	J13.4C2
015 VHF DIRECTION FINDER [2 BIT] (VHF DF)	INDICATES THE STATUS OF DIRECTION FINDER EQUIPMENT IN THE VHF RANGE.	J13.2C4 J13.5C2	J13.3C3	J13.4C2
016 UHF DIRECTION FINDER [2 BIT] (UHF DF)	INDICATES THE STATUS OF DIRECTION FINDER EQUIPMENT IN THE UHF RANGE.	J13.2C4 J13.5C2	J13.3C3	J13.4C2

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001-016 -----		
NO STATEMENT	0	NO CAPABILITY.
STATUS UP	1	MISSION CAPABLE.
STATUS DOWN	2	NOT MISSION CAPABLE.
STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).

DFI	NAME	DEFINITION
269	TRACK NUMBER, LINK 11/LINK 11B	A SET OF COMMON REFERENCE NUMBERS USED TO ASSOCIATE DIRECTIVES AND TACTICAL INFORMATION BY IDENTIFYING SYSTEM ENTITIES SUCH AS PARTICIPATING UNITS, TRACKS, TARGETS, AND SPECIAL POINTS. THE NUMBERS ARE EXPRESSED IN OCTAL.
DATA STANDARD USAGE: Link 16		STATUS:
DUI NAME	EXPLANATION	APPLICABILITY
016 LINK 11/LINK 11B TRACK NUMBER [12 BIT]	A SET OF REFERENCE NUMBERS USED TO ASSOCIATE DIRECTIVES AND TACTICAL INFORMATION ON LINK 11/LINK 11B.	J7.4I
DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 016 -----		
ILLEGAL	0000 (OCTAL)	RESERVED FOR DESIGNATING PARTICIPATING UNITS.
NUMERIC	0001 THROUGH 0076 (OCTAL)	
SPARE	0077 (OCTAL)	RESERVED FOR DESIGNATING REPORTING UNITS.
NUMERIC	0100 THROUGH 0176 (OCTAL)	
NUMERIC	0177 (OCTAL)	COLLECTIVE ADDRESS. THESE TNS ARE ASSIGNED IN BLOCKS TO COMMAND AND CONTROL SYSTEMS TO BE USED FOR TACTICAL INFORMATION REPORTING.
NUMERIC	0200 THROUGH 7776 (OCTAL)	
ILLEGAL	7777 (OCTAL)	

APPENDIX B

DFI	NAME	DEFINITION
270	LABEL	DEFINES THE GENERAL MESSAGE CLASSIFICATION AS A CRITERION FOR SELECTIVE ACCESS OF INFORMATION.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
004 LABEL, J-SERIES [5 BIT]	PROVIDES A LABEL FOR J-SERIES MESSAGES.	J0.0I J0.1I J0.2I J0.3I J0.4I J0.5I J0.6I J0.7I J1.0I J1.1I J1.2I J1.3I J1.4I J1.5I J1.6I J2.0I J2.2I J2.3I J2.4I J2.5I J2.6I J3.0I J3.1I J3.2I J3.3I J3.4I J3.5I J3.6I J3.7I J5.4I J6.0I J7.0I J7.1I J7.2I J7.3I J7.4I J7.5I J7.6I J7.7I J8.0I J8.1I J9.0I J9.1I J10.2I J10.3I J10.5I J10.6I J12.0I J12.1I J12.2I J12.3I J12.4I J12.5I J12.6I J12.7I J13.0I J13.2I J13.3I J13.4I J13.5I J14.0I J14.2I J15.0I J17.0I J28.0I J28.1I J28.2I J28.20I J28.3I J28.4I J28.5I J28.6I J28.7I J29.1I J29.3I J29.4I J29.5I J29.7I J30.0I J30.1I J30.2I J30.3I J30.4I J30.5I J30.6I J30.7I J31.0I J31.1I J31.7I
007 LABEL, J-SERIES REQUEST [5 BIT]	IDENTIFIES THE LABEL OF THE MESSAGE REQUESTED BY A JU TRANSMITTING THIS MESSAGE.	J0.6I

DFI NAME
270 LABEL

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 004 -----		
SYSTEM INFORMATION EX- CHANGE AND NETWORK MANAGEMENT	0	
SYSTEM INFORMATION EX- CHANGE AND NETWORK MANAGEMENT	1	
PRECISE PARTICIPANT LOCATION AND IDENTI- FICATION (PPLI)	2	
SURVEILLANCE	3	
UNDEFINED	4	
UNDEFINED	5	
EW/INTELLIGENCE	6	
INFORMATION MANAGEMENT	7	
INFORMATION MANAGEMENT	8	
WEAPONS COORDINATION AND MANAGEMENT	9	
WEAPONS COORDINATION AND MANAGEMENT	10	
UNDEFINED	11	
CONTROL	12	
PLATFORM AND SYSTEM STATUS	13	
CONTROL	14	
THREAT WARNING	15	
UNDEFINED	16	
MISCELLANEOUS	17	
UNDEFINED	18 THROUGH 27	
NATIONAL USE	28	
MISCELLANEOUS	31	
----- FOR DUI 007 -----		
SYSTEM INFORMATION EX- CHANGE AND NETWORK MANAGEMENT	0	
ILLEGAL	1	

DFI NAME
270 LABEL

DATA ITEM (CONTINUED)
PRECISE PARTICIPANT
LOCATION AND
IDENTIFICATION
ILLEGAL

BIT CODE
2

3 THROUGH 31

EXPLANATION

APPENDIX B

DFI	NAME	DEFINITION
271	SUBLABEL	SUBDIVIDES A MESSAGE LABEL TO PROVIDE A FINER SET OF CRITERIA FOR ACCESS OF INFORMATION.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
005 SUBLABEL, J-SERIES [3 BIT]	PROVIDES A SUBLABEL FOR FURTHER DIVISION OF LABEL, J-SERIES.	J0.0I
		J0.1I
		J0.2I
		J0.3I
		J0.4I
		J0.5I
		J0.6I
		J0.7I
		J1.0I
		J1.1I
		J1.2I
		J1.3I
		J1.4I
		J1.5I
		J1.6I
		J2.0I
		J2.2I
		J2.3I
		J2.4I
		J2.5I
		J2.6I
		J3.0I
		J3.1I
		J3.2I
		J3.3I
		J3.4I
		J3.5I
		J3.6I
		J3.7I
		J5.4I
		J6.0I
		J7.0I
		J7.1I
		J7.2I
		J7.3I
		J7.4I
		J7.5I
		J7.6I
		J7.7I
		J8.0I
		J8.1I
		J9.0I
		J9.1I
		J10.2I
		J10.3I
		J10.5I
		J10.6I
		J12.0I
		J12.1I
		J12.2I
		J12.3I
		J12.4I
		J12.5I
		J12.6I
		J12.7I
		J13.0I
		J13.2I
		J13.3I
		J13.4I
		J13.5I
		J14.0I
		J14.2I
		J15.0I
		J17.0I
		J28.0I
		J28.1I
		J28.2I
		J28.20I
		J28.3I
		J28.4I
		J28.5I
		J28.6I
		J28.7I
		J29.1I
		J29.3I
		J29.4I
		J29.5I
		J29.7I
		J30.0I
		J30.1I
		J30.2I
		J30.3I
		J30.4I
		J30.5I
		J30.6I
		J30.7I
		J31.0I
		J31.1I
		J31.7I
007 SUBLABEL, J-SERIES REQUEST [3 BIT]	IDENTIFIES THE SUBLABEL OF THE MESSAGE REQUESTED BY A JU TRANSMITTING THIS MESSAGE.	J0.6I

DFI NAME
271 SUBLABEL

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 005 -----		
NUMERIC	0 THROUGH 7	
----- FOR DUI 007 -----		
----- FOR LABEL, LINK 16 REQUEST = 0 -----		
ILLEGAL	0	
TEST	1	
ILLEGAL	2 THROUGH 7	
----- FOR LABEL, LINK 16 REQUEST = 2 -----		
ILLEGAL	0	
UNDEFINED	1	
AIR PPLI INITIAL WORD	2	
SURFACE (MARITIME)	3	
PPLI INITIAL WORD		
SUBSURFACE (MARITIME)	4	
PPLI INITIAL WORD		
LAND (GROUND) POINT PPLI	5	
INITIAL WORD		
LAND (GROUND) TRACK PPLI	6	
INITIAL WORD		
UNDEFINED	7	

DFI NAME
272 EA FREQUENCY BAND STATUS

DEFINITION
INDICATES THE ABILITY OF ANY EA EQUIPMENT TO OPERATE IN THE
FREQUENCY BAND(S) OR FREQUENCY RANGE(S) SPECIFIED.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
001 EA FREQUENCY BAND A [2 BIT] (EA A)	INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 0 THROUGH 250 MHZ.	J13.2C4	J13.3C3	J13.5C2
002 EA FREQUENCY BAND B [2 BIT] (EA B)	INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 250 THROUGH 500 MHZ.	J13.2C4	J13.3C3	J13.5C2
003 EA FREQUENCY BAND C [2 BIT] (EA C)	INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 500 THROUGH 1000 MHZ.	J13.2C4	J13.3C3	J13.5C2
004 EA FREQUENCY BAND D [2 BIT] (EA D)	INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 1000 THROUGH 2000 MHZ.	J13.2C4	J13.3C3	J13.5C2
005 EA FREQUENCY BAND E [2 BIT] (EA E)	INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 2000 THROUGH 3000 MHZ.	J13.2C4	J13.3C3	J13.5C2
006 EA FREQUENCY BAND F [2 BIT] (EA F)	INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 3000 THROUGH 4000 MHZ.	J13.2C4	J13.3C3	J13.5C2
007 EA FREQUENCY BAND G [2 BIT] (EA G)	INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 4000 THROUGH 6000 MHZ.	J13.2C4	J13.3C3	J13.5C2
008 EA FREQUENCY BAND H [2 BIT] (EA H)	INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 6000 THROUGH 8000 MHZ.	J13.2C4	J13.3C3	J13.5C2
009 EA FREQUENCY BAND I [2 BIT] (EA I)	INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 8000 THROUGH 10,000 MHZ.	J13.2C4	J13.3C3	J13.5C2
010 EA FREQUENCY BAND J [2 BIT] (EA J)	INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 10,000	J13.2C4	J13.3C3	J13.5C2

DFI NAME
272 EA FREQUENCY BAND STATUS

DUI NAME	EXPLANATION	APPLICABILITY		
010 (CONTINUED)	THROUGH 20,000 MHZ.			
011 EA FREQUENCY BAND K [2 BIT] (EA K)	INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 20,000 THROUGH 40,000 MHZ.	J13.2C4	J13.3C3	J13.5C2
012 EA FREQUENCY BAND L [2 BIT] (EA L)	INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 40,000 THROUGH 60,000 MHZ.	J13.2C4	J13.3C3	J13.5C2
013 EA FREQUENCY BAND M [2 BIT] (EA M)	INDICATES THE STATUS OF EA EQUIPMENT IN THE FREQUENCY RANGE OF 60,000 THROUGH 100,000 MHZ.	J13.2C4	J13.3C3	J13.5C2
014 DECOY, CHAFF [2 BIT]	INDICATES THE STATUS OF THE DECOY CHAFF.	J13.2C4	J13.3C3	J13.5C2
015 DECOY, IR [2 BIT]	INDICATES THE STATUS OF THE INFRARED DECOY.	J13.2C4	J13.3C3	J13.5C2
016 DECOY EA STATUS [2 BIT] (D EA)	INDICATES THE STATUS OF THE DECOY EA SUBSYSTEM.	J13.2C6		

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001-016 -----		
NO STATEMENT	0	NO CAPABILITY.
STATUS UP	1	MISSION CAPABLE.
STATUS DOWN	2	NOT MISSION CAPABLE.
STATUS DEGRADED	3	PARTIALLY MISSION CAPABLE (E.G., LOW POWER OUT, LOW SENSITIVITY).

DFI	NAME	DEFINITION
273	RELAY INDICATOR	INDICATES WHETHER OR NOT A MESSAGE IS A RELAYED MESSAGE.
DATA STANDARD USAGE: Link 16		STATUS:
DUI NAME	EXPLANATION	APPLICABILITY
002 RELAYED TRANSMISSION INDICATOR [1 BIT] (RI)	USED TO INDICATE WHETHER OR NOT A MESSAGE IS A RELAYED MESSAGE.	HEADER
DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 002 -----		
TIME SLOT DATA NOT RELAYED	0	
TIME SLOT DATA RELAYED	1	DATA SHOULD NOT BE USED FOR RELATIVE NAVIGATION.

DFI	NAME	DEFINITION			
274	ROUND-TRIP-TIMING REPLY STATUS INDICATOR	AN INDICATION OF A DATA TERMINAL'S ABILITY TO RESPOND TO ROUND-TRIP-TIMING (RTT) INTERROGATIONS WITH RTT REPLIES.			
DATA STANDARD USAGE: Link 16		STATUS:			
DUI NAME		EXPLANATION	APPLICABILITY		
001	RTT REPLY STATUS INDICATOR [1 BIT] (RRS)	CONVEYS THE STATUS OF A TERMINAL'S RTT REPLY FUNCTION.	J0.0I J2.4I	J2.2I J2.5I	J2.3I J2.6I
DATA ITEM		BIT CODE	EXPLANATION		
----- FOR DUI 001 -----					
RTT REPLY FUNCTION NORMAL		0			
RTT REPLY FUNCTION NOT OPERATIONAL		1			

APPENDIX B

DFI	NAME	DEFINITION
275	ORIGINATOR ENVIRONMENT/ CATEGORY	IDENTIFIES THE ENVIRONMENT OF THE ORIGINATOR OF THE MESSAGE.
DATA STANDARD USAGE: Link 16		STATUS:
DUI NAME	EXPLANATION	APPLICABILITY
001 ORIGINATOR ENVIRONMENT/ CATEGORY [2 BIT] (ENV CAT)	IDENTIFIES THE ENVIRONMENT/CATEGORY OF THE ORIGINATOR OF THE MESSAGE.	J2.0I
004 ENVIRONMENT/CATEGORY [3 BIT] (ENV/CAT)	IDENTIFIES THE ENVIRONMENT/CATEGORY OF A JTIDS/MIDS UNIT OR TRACK.	J3.0C5 J3.7C1 J6.0I J7.0I J12.0C1 J12.6I J12.7C2 J14.0I J14.2C5 J15.0C1
DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
SURFACE	0	
SUBSURFACE	1	
LAND	2	
AIR	3	
----- FOR DUI 004 -----		
NO STATEMENT/UNKNOWN	0	
SPACE	1	
AIR	2	
SURFACE (MARITIME)	3	
SUBSURFACE (MARITIME)	4	
LAND (GROUND)	5	
UNDEFINED	6 THROUGH 7	

DFI NAME DEFINITION
276 U COORDINATE THE EAST-WEST COMPONENT OF POSITION MEASURED IN A U, V
CARTESIAN COORDINATE SYSTEM WHERE THE U,V PLANE IS TANGENT TO
THE EARTH AT ORIGIN. POSITIONS EAST OF ORIGIN ARE POSITIVE,
WEST NEGATIVE.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
001 U COORDINATE [20 BIT]	THE EAST WEST COMPONENT OF POSITION MEASURED IN A U, V CARTESIAN COOR- DINATE SYSTEM WHERE THE U,V PLANE IS TANGENT TO THE EARTH AT ITS ORIGIN. POSITIONS EAST OF THE ORIGIN ARE POSITIVE. POSITIONS WEST OF THE ORIGIN ARE NEGATIVE.	J2.2C3 J2.5C3	J2.3C3 J2.6C3	J2.4C3

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
0 DATA MILES	0	IN 1/512 DATA MILE INCREMENTS.
+1/512 THROUGH	1 THROUGH 524287	
+1023 511/512 DATA MILES		
NO STATEMENT	524288	
-1023 511/512 THROUGH	524289 THROUGH 1048575	
-1/512 DATA MILES		

B-168

MIL-STD-6016B
APPENDIX B

DFI	NAME	DEFINITION
277	V COORDINATE	THE NORTH-SOUTH COMPONENT OF POSITION MEASURED IN A U,V CARTESIAN COORDINATE SYSTEM WHERE THE U,V PLANE IS TANGENT TO THE EARTH AT THE ORIGIN. POSITIONS NORTH OF ORIGIN ARE POSITIVE, SOUTH NEGATIVE.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 V COORDINATE [20 BIT]	THE NORTH SOUTH COMPONENT OF POSI- TION MEASURED IN A U,V CARTESIAN COORDINATE SYSTEM WHERE THE U,V PLANE IS TANGENT TO THE EARTH AT ITS ORIGIN. POSITIONS NORTH OF THE ORIGIN ARE POSITIVE. POSI- TIONS SOUTH OF THE ORIGIN ARE NEGATIVE.	J2.2C3 J2.3C3 J2.4C3 J2.5C3 J2.6C3

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
0 DATA MILES	0	IN 1/512 DATA MILE INCREMENTS.
+1/512 THROUGH	1 THROUGH 524287	
+1023 511/512 DATA MILES		
NO STATEMENT	524288	
-1023 511/512 THROUGH	524289 THROUGH 1048575	
-1/512 DATA MILES		

DFI NAME DEFINITION
278 RELATIVE POSITION QUALITY INDICATES THE LEVEL OF RELATIVE POSITION UNCERTAINTY IN THE U,
V TANGENT PLANE AS ESTIMATED BY THE TERMINAL RELATIVE
NAVIGATION FUNCTION.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
001 RELATIVE POSITION QUALITY [4 BIT]	INDICATES THE LEVEL OF RELATIVE POSITION UNCERTAINTY IN THE U,V TANGENT PLANE AS ESTIMATED BY THE TERMINAL RELATIVE NAVIGATION FUNC- TION. THE QUALITY IS STATED AS A NUMERICAL VALUE FROM 0 TO 15 WHERE THE HIGHER VALUES INDICATE THE HIGHER LEVELS OF QUALITY.	J2.2C3 J2.5C3	J2.3C3 J2.6C3	J2.4C3

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
>18080 FEET	0	
< OR = 18080 FEET	1	
< OR = 9040 FEET	2	
< OR = 4520 FEET	3	
< OR = 2260 FEET	4	
< OR = 1600 FEET	5	
< OR = 1130 FEET	6	
< OR = 800 FEET	7	
< OR = 565 FEET	8	
< OR = 400 FEET	9	
< OR = 282 FEET	10	
< OR = 200 FEET	11	
< OR = 141 FEET	12	
< OR = 100 FEET	13	
< OR = 71 FEET	14	
NAVIGATION CONTROLLER	15	REFERENCE SOURCE FOR NAVIGATION.

DFI NAME DEFINITION
279 TIME QUALITY THE LEVEL OF TIME UNCERTAINTY WITH RESPECT TO SYSTEM TIME AS ESTIMATED BY THE TERMINAL RELATIVE NAVIGATION FUNCTION.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
001 TIME QUALITY [4 BIT]	THE QUALITY IS STATED AS A NUMERICAL VALUE FROM 0 TO 15 WHERE THE HIGHER VALUES INDICATE THE HIGHER QUALITIES. QUALITY 0 IS NOT TO BE USED FOR SYNCHRONIZATION OR THE RELATIVE NAVIGATION FUNCTION.	J0.0I J2.4I RTT-B	J2.2I J2.5I	J2.3I J2.6I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
> 18080 NANOSECONDS	0	
< OR = 18080 NANOSECONDS	1	
< OR = 9040 NANOSECONDS	2	
< OR = 4520 NANOSECONDS	3	
< OR = 2260 NANOSECONDS	4	
< OR = 1600 NANOSECONDS	5	
< OR = 1130 NANOSECONDS	6	
< OR = 800 NANOSECONDS	7	
< OR = 565 NANOSECONDS	8	
< OR = 400 NANOSECONDS	9	
< OR = 282 NANOSECONDS	10	
< OR = 200 NANOSECONDS	11	
< OR = 141 NANOSECONDS	12	
< OR = 100 NANOSECONDS	13	
< OR = 71 NANOSECONDS	14	
NET TIME REFERENCE	15	

DFI NAME DEFINITION
280 TRACK QUALITY AN ESTIMATE OF THE QUALITY OF TRACK INFORMATION ON THE BASIS
OF ITS RELIABILITY.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 TRACK QUALITY [4 BIT]	THE TRACK QUALITY IS STATED AS A NUMERICAL VALUE FROM 1 TO 15 WITH THE HIGHER VALUES INDICATING THE HIGHER TRACK QUALITIES. THE TQ IS BASED ON THE POSITIONAL ACCURACY OF A TRACK REPRESENTED BY AN AREA IN SQUARE DATA MILES WITHIN WHICH IT IS ASSESSED THAT THERE IS A 95% PROBABILITY THAT THE TRACK LIES.	J3.2I J3.3I J3.5I
002 TARGET POSITION QUALITY [2 BIT] (TPQ)	THE TARGET POSITION QUALITY IS STATED AS A NUMERICAL VALUE FROM 1 TO 3 WITH THE HIGHER VALUES INDICATING HIGHER RELIABILITY OF POSITIONAL ACCURACY OF TARGET LOCATION. THE RELIABILITY OF THE POSITIONAL INFORMATION IS EXPRESSED IN TERMS OF THE POSITIONAL ACCURACY ASSOCIATED WITH EACH PQ VALUE. THE POSITIONAL ACCURACY ASSOCIATED WITH EACH PQ VALUE IS DEFINED AS THE AREA (DM SQUARED) WITHIN WHICH THERE IS A .95 PROBABILITY THAT THE TARGET IS ACTUALLY LOCATED AT THE TIME OF THE REPORT.	J12.6I
003 TRACK QUALITY, 1 [4 BIT]	SPECIFIES THE RELIABILITY OF THE KINEMATIC DATA WITH HIGHER VALUES INDICATING HIGHER TRACK QUALITY. THE ALGORITHM USED TO DERIVE BALLISTIC MISSILE TRACK QUALITY IS: B EQUALS THE SUMMATION (FROM 1 TO 3) OF THE POSITIONAL VARIANCES CONTAINED IN THE COVARIANCE MATRIX PLUS THE PRODUCT OF THE VELOCITY VARIANCES IN THE	J3.6I

B-173

EXPLANATION	APPLICABILITY
COVARIANCE MATRIX TIMES A SQUARED FACTOR WHICH VARIES THE DEPENDENCE OF THE COMPUTED BALLISTIC MISSILE TRACK QUALITY ON THE VELOCITY ERRORS OF THE REPORTED TRACK. THE DEFAULT FACTOR IS EQUAL TO 6 SECONDS (0-24, 1). B IS A LOOK-UP TABLE.	

BIT CODE

EXPLANATION

0

A TRACK REPORT IS IDENTIFIED AS A NONREAL-TIME REPORT WITH TQ = 0 IF ANY OF THE FOLLOWING CONDITIONS ARE TRUE: THE TRACK DATA ORIGINATE FROM OTHER THAN A TDS OR JTIDS/MIDS EQUIPPED AIRCRAFT; THE TRACK DATA HAVE BEEN RELAYED FROM ANOTHER SYSTEM BY OTHER THAN A REAL-TIME DATA LINK INTERFACE; THE TRACK DATA HAVE BEEN DERIVED FROM OTHER THAN INTEGRATED SENSORS.

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8

DFI NAME
280 TRACK QUALITY

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
EQUAL TO OR < 1.10 SQUARE DATA MILES	9	
EQUAL TO OR < 0.0281 SQUARE DATA MILES	10	
EQUAL TO OR < 0.0070 SQUARE DATA MILES	11	
EQUAL TO OR < 0.0018 SQUARE DATA MILES	12	
EQUAL TO OR < 0.0004 SQUARE DATA MILES	13	
EQUAL TO OR < 0.0001 SQUARE DATA MILES	14	
EQUAL TO OR < 0.00003 SQUARE DATA MILES	15	
----- FOR DUI 002 -----		
NO STATEMENT	0	
EQUAL TO OR < 4.4 SQUARE DATA MILES.	1	
EQUAL TO OR < 1.10 SQUARE DATA MILES	2	
EQUAL TO OR < 0.0281 SQUARE DATA MILES	3	
----- FOR DUI 003 -----		
NONREAL-TIME TRACK	0	
>2.166332 TIMES 10 TO THE 10TH POWER SQUARE FEET	1	
EQUAL TO OR < 2.166332 TIMES 10 TO THE 10TH POWER SQUARE FEET	2	
EQUAL TO OR < 6.665636 TIMES 10 TO THE 9TH POWER SQUARE FEET	3	
EQUAL TO OR <2.050965 TIMES 10 TO THE 9TH POWER SQUARE FEET	4	

DFI NAME
280 TRACK QUALITY

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
EQUAL TO OR < 631,066,095 SQUARE FEET	5	
EQUAL TO OR < 194,174,183 SQUARE FEET	6	
EQUAL TO OR < 59,745,902 SQUARE FEET	7	
EQUAL TO OR < 18,383,355 SQUARE FEET	8	
EQUAL TO OR < 5,656,417 SQUARE FEET	9	
EQUAL TO OR < 1,740,436 SQUARE FEET	10	
EQUAL TO OR < 535,519 SQUARE FEET	11	
EQUAL TO OR < 164,775 SQUARE FEET	12	
EQUAL TO OR < 50,700 SQUARE FEET	13	
EQUAL TO OR < 15,600 SQUARE FEET	14	
EQUAL TO OR < 4,800 SQUARE FEET	15	

B-175

MIL-STD-6016B
APPENDIX B

DFI	NAME	DEFINITION
281	LATITUDE	THE ANGULAR DISTANCE NORTH OR SOUTH FROM THE EQUATOR TO A POINT ON THE EARTH'S SURFACE, MEASURED IN DEGREES, FROM 0 DEGREES AT THE EQUATOR UP TO, BUT NOT EXCEEDING, THE 90 DEGREE ANGLES NORTH AND SOUTH BETWEEN THE EQUATOR AND THE POLES.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
001 LATITUDE, LSB [1 BIT] (LAT LSB)	USED IN CONJUNCTION WITH A LATITUDE FIELD TO DOUBLE THE PRECISION OF THE FIELD.	J12.0C5		
002 LATITUDE, LSBS [3 BIT]	USED IN CONJUNCTION WITH LATITUDE, 0.0051 MINUTE TO ACHIEVE A PRECISION OF APPROXIMATELY 4 FEET.	J3.5C3		
014 LATITUDE, 0.0051 MINUTE [21 BIT]	THE PRECISION IS APPROXIMATELY 31 FEET.	J3.1E0 J3.4E0 J5.4E0 J15.0E0	J3.2E0 J3.5E0 J14.0C2	J3.3E0 J3.7C2 J14.2C2
015 LATITUDE, 0.0013 MINUTE [23 BIT]	THE PRECISION IS APPROXIMATELY 8 FEET.	J2.2E0 J2.5E0 J12.3E0	J2.3E0 J2.6E0	J2.4E0 J12.0C3
016 LATITUDE, 0.0412 MINUTE [18 BIT]	THE PRECISION IS APPROXIMATELY 250 FEET.	J7.3I		
017 LATITUDE, 0.0103 MINUTE [20 BIT]	THE PRECISION IS APPROXIMATELY 63 FEET.	J2.0E0 J3.0E0 J12.6I	J2.4C4 J7.6E0 J12.7I	J2.5C4 J12.0C1

DATA ITEM	BIT CODE	EXPLANATION
-----------	----------	-------------

----- FOR DUI 001 WITH DUI 015 -----

0 DEGREES	0	IN 90/8,388,607 DEGREE INCREMENTS.
+90/8,388,607 THROUGH +90 DEGREES NORTH	1 THROUGH 8388607	
NO STATEMENT	8388608	
-90 THROUGH -90/8,388,607 DEGREES SOUTH	8388609 THROUGH 16777215	

DFI NAME
281 LATITUDE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
----- FOR DUI 002 WITH DUI 014 -----		
0 DEGREES	0	IN 90/8,388,607 DEGREE INCREMENTS.
+90/8,388,607 THROUGH	1 THROUGH 8388607	
+90 DEGREES NORTH		
NO STATEMENT	8388608	
-90 THROUGH	8388609 THROUGH 16777215	
-90/8,388,607 DEGREES		
SOUTH		
----- FOR DUI 014 -----		
0 DEGREES	0	IN 90/1,048,575 DEGREE INCREMENTS.
+90/1,048,575 THROUGH	1 THROUGH 1048575	
+90 DEGREES NORTH		
NO STATEMENT	1048576	
-90 THROUGH	1048577 THROUGH 2097151	
-90/1,048,575 DEGREES		
SOUTH		
----- FOR DUI 015 -----		
0 DEGREES	0	IN 90/4,194,303 DEGREE INCREMENTS.
+90/4,194,303 THROUGH	1 THROUGH 4194303	
+90 DEGREES NORTH		
NO STATEMENT	4194304	
-90 THROUGH	4194305 THROUGH 8388607	
-90/4,194,303 DEGREES		
SOUTH		
----- FOR DUI 016 -----		
0 DEGREES	0	IN 90/131,071 DEGREE INCREMENTS.
+90/131,071 THROUGH +90	1 THROUGH 131071	
DEGREES NORTH		
NO STATEMENT	131072	

DFI NAME
281 LATITUDE

DATA ITEM (CONTINUED)
-90 THROUGH -90/131,071
DEGREES SOUTH

----- FOR DUI 017 -----

0 DEGREES
+90/524,287 THROUGH +90
DEGREES NORTH
NO STATEMENT
-90 THROUGH -90/524,287
DEGREES SOUTH

BIT CODE
131073 THROUGH 262143

0
1 THROUGH 524287

524288
524289 THROUGH 1048575

EXPLANATION

IN 90/524,287 DEGREE INCREMENTS.

DFI	NAME	DEFINITION
282	LONGITUDE	THE ANGULAR DISTANCE EAST OR WEST FROM THE PRIME OR ZERO MERIDIAN TO A POINT ON THE EARTH'S SURFACE, MEASURED IN DEGREES, FROM 0 DEGREES AT THE PRIME OR ZERO MERIDIAN UP TO, BUT NOT EXCEEDING, THE 180 DEGREE ANGLES EAST AND WEST BETWEEN THE PRIME OR ZERO MERIDIAN AND THE 180 DEGREE MERIDIAN.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
001 LONGITUDE, LSB [1 BIT] (LON LSB)	USED IN CONJUNCTION WITH A LONGITUDE FIELD TO DOUBLE THE PRECISION OF THE FIELD.	J12.0C5		
002 LONGITUDE, LSBS [3 BIT]	USED IN CONJUNCTION WITH LONGITUDE, 0.0051 MINUTE TO ACHIEVE A PRECISION OF APPROXIMATELY 4 FEET.	J3.5C3		
012 LONGITUDE, 0.0412 MINUTE [19 BIT]	THE PRECISION IS APPROXIMATELY 250 FEET.	J7.3I		
013 LONGITUDE, 0.0103 MINUTE [21 BIT]	THE PRECISION IS APPROXIMATELY 63 FEET.	J2.0E0 J3.0E0 J12.6I	J2.4C4 J7.6E0 J12.7I	J2.5C4 J12.0C1
014 LONGITUDE, 0.0051 MINUTE [22 BIT]	THE PRECISION IS APPROXIMATELY 31 FEET.	J3.1E0 J3.4E0 J5.4E0 J15.0E0	J3.2E0 J3.5E0 J14.0C2	J3.3E0 J3.7C2 J14.2C2
015 LONGITUDE, 0.0013 MINUTE [24 BIT]	THE PRECISION IS APPROXIMATELY 8 FEET.	J2.2E0 J2.5E0 J12.3E0	J2.3E0 J2.6E0	J2.4E0 J12.0C3

DATA ITEM	BIT CODE	EXPLANATION
-----------	----------	-------------

----- FOR DUI 001 WITH DUI 015 -----

0 DEGREES	0	IN 180/16,777,215 DEGREE INCREMENTS.
+180/16,777,215 THROUGH +180 DEGREES EAST	1 THROUGH 16777215	
NO STATEMENT	16777216	

DFI NAME
282 LONGITUDE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
-180 THROUGH -180/16,777,215 DEGREES WEST	16777217 THROUGH 33554431	
----- FOR DUI 002 WITH DUI 014 -----		
0 DEGREES	0	IN 180/16,777,215 DEGREE INCREMENTS.
+180/16,777,215 THROUGH +180 DEGREES EAST	1 THROUGH 16777215	
NO STATEMENT	16777216	
-180 THROUGH -180/16,777,215 DEGREES WEST	16777217 THROUGH 33554431	
----- FOR DUI 012 -----		
0 DEGREES	0	IN 180/262,143 DEGREE INCREMENTS.
+180/262,143 THROUGH +180 DEGREES EAST	1 THROUGH 262143	
NO STATEMENT	262144	
-180 THROUGH -180/262,143 DEGREES WEST	262145 THROUGH 524287	
----- FOR DUI 013 -----		
0 DEGREES	0	IN 180/1,048,575 DEGREE INCREMENTS.
+180/1,048,575 THROUGH +180 DEGREES EAST	1 THROUGH 1048575	
NO STATEMENT	1048576	
-180 THROUGH -180/1,048,575 DEGREES WEST	1048577 THROUGH 2097151	

DFI NAME
282 LONGITUDE

DATA ITEM (CONTINUED)
----- FOR DUI 014 -----

0 DEGREES
+180/2,097,151 THROUGH
+180 DEGREES EAST
NO STATEMENT
-180 THROUGH
-180/2,097,151 DEGREES
WEST

----- FOR DUI 015 -----

0 DEGREES
+180/8,388,607 THROUGH
+180 DEGREES EAST
NO STATEMENT
-180 THROUGH
-180/8,388,607 DEGREES
WEST

BIT CODE

0
1 THROUGH 2097151

2097152
2097153 THROUGH 4194303

0
1 THROUGH 8388607

8388608
8388609 THROUGH 16777215

EXPLANATION

IN 180/2,097,151 DEGREE INCREMENTS.

IN 180/8,388,607 DEGREE INCREMENTS.

DFI NAME DEFINITION
283 QUALITY THE QUALITY IS STATED AS A NUMERICAL VALUE WHERE THE HIGHER
VALUES INDICATE THE HIGHER QUALITIES.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
001 GEODETIC POSITION QUALITY [4 BIT]	THE LEVEL OF GEODETIC POSITION UNCERTAINTY AS ESTIMATED BY THE TERMINAL NAVIGATION FUNCTION.	J2.2I J2.5I	J2.3I J2.6I	J2.4I
002 ALTITUDE QUALITY [4 BIT]	THE LEVEL OF HEIGHT UNCERTAINTY AS ESTIMATED BY THE TERMINAL NAVIGATION FUNCTION.	J2.2I		
003 ELEVATION QUALITY [4 BIT]	THE LEVEL OF HEIGHT UNCERTAINTY AS ESTIMATED BY THE TERMINAL NAVIGATION FUNCTION.	J2.3I	J2.5I	J2.6I
004 DEPTH QUALITY [4 BIT]	THE LEVEL OF DEPTH UNCERTAINTY AS ESTIMATED BY THE TERMINAL NAVIGATION FUNCTION.	J2.4I		

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001-003 -----		
>18080 FT	0	
< OR = TO 18080 FT	1	
< OR = TO 9040 FT	2	
< OR = TO 4520 FT	3	
< OR = TO 2260 FT	4	
< OR = TO 1600 FT	5	
< OR = TO 1130 FT	6	
< OR = TO 800 FT	7	
< OR = TO 565 FT	8	
< OR = TO 400 FT	9	
< OR = TO 282 FT	10	
< OR = TO 200 FT	11	
< OR = TO 141 FT	12	
< OR = TO 100 FT	13	
< OR = TO 71 FT	14	
< OR = TO 50 FT	15	

DFI NAME
283 QUALITY

DATA ITEM (CONTINUED)
----- FOR DUI 004 -----

TBD

BIT CODE

EXPLANATION

DFI	NAME	DEFINITION
284	BETA ANGLE	THE ORIENTATION OF THE U,V TANGENT PLANE WITH RESPECT TO TRUE NORTH, I.E., THE ANGLE FORMED BY THE V-AXIS AND TRUE NORTH. COUNTER-CLOCKWISE DISPLACEMENT OF THE V-AXIS IS STATED AS A POSITIVE ANGLE, CLOCKWISE AS A NEGATIVE ANGLE.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
001 BETA ANGLE [15 BIT]	THE ORIENTATION OF THE U,V TANGENT PLANE WITH RESPECT TO TRUE NORTH, I.E., THE ANGLE FORMED BY THE V-AXIS AND TRUE NORTH. COUNTER-CLOCKWISE DISPLACEMENT OF THE V-AXIS IS STATED AS A POSITIVE ANGLE, CLOCKWISE AS A NEGATIVE ANGLE.	J2.2C3 J2.5C3	J2.3C3 J2.6C3	J2.4C3

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
0 MILLIRADIANS	0	IN 0.0125 MILLIRADIAN INCREMENTS.
+0.0125 THROUGH +204.8 MILLIRADIANS	1 THROUGH 16383	
NO STATEMENT	16384	
-204.8 THROUGH -0.0125 MILLIRADIANS	16385 THROUGH 32767	

DFI NAME
285 RELATIVE AZIMUTH QUALITY

DEFINITION
THE LEVEL OF UNCERTAINTY IN THE ANGULAR ORIENTATION OF THE
LOCAL HEADING REFERENCE WITH RESPECT TO GRID NORTH AS
ESTIMATED BY THE TERMINAL RELATIVE NAVIGATION FUNCTION.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
001 RELATIVE AZIMUTH QUALITY [3 BIT]	THE QUALITY IS STATED AS A NUMERICAL VALUE FROM 0 TO 7 WHERE THE HIGHER VALUES INDICATE THE HIGHER LEVELS OF QUALITY.	J2.2C3 J2.5C3	J2.3C3 J2.6C3	J2.4C3

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
>64 MILLIRADIANS	0	
< OR = 64 MILLIRADIANS	1	
< OR = 32 MILLIRADIANS	2	
< OR = 16 MILLIRADIANS	3	
< OR = 8 MILLIRADIANS	4	
< OR = 4 MILLIRADIANS	5	
< OR = 2 MILLIRADIANS	6	
< OR = 1 MILLIRADIAN	7	

DFI NAME DEFINITION
286 RUNWAY VISUAL RANGE EXPRESSES RUNWAY VISUAL RANGE IN METERS.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 ACTIVE RUNWAY VISUAL RANGE [4 BIT] (AR VISUAL RANGE)	EXPRESSES PRIMARY RUNWAY VISUAL RANGE IN METERS.	J13.0E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
0 THROUGH 1400 METERS NO STATEMENT	0 THROUGH 14 15	IN 100 METER INCREMENTS.

DFI NAME DEFINITION
287 BASE ACTUAL WEATHER EXPRESSES BASE ACTUAL WEATHER.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 BASE ACTUAL WEATHER [5 BIT]	DESCRIBES THE ACTUAL WEATHER AT A BASE.	J13.0C1
002 BASE ACTUAL WEATHER DESCRIPTOR [3 BIT] (WXDES)	USED IN CONJUNCTION WITH BASE ACTUAL WEATHER AND BASE ACTUAL WEATHER INTENSITY/PROXIMITY.	J13.0C1
003 BASE ACTUAL WEATHER INTENSITY/ PROXIMITY [3 BIT] (WXIP)	USED IN CONJUNCTION WITH BASE ACTUAL WEATHER AND BASE ACTUAL WEATHER DESCRIPTOR.	J13.0C1

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
NO SIGNIFICANT WEATHER	1	
DRIZZLE	2	
RAIN	3	
SNOW	4	
SNOW GRAINS	5	
DIAMOND DUST	6	
ICE PELLETS	7	
HAIL	8	
SMALL HAIL/SNOW PELLETS	9	
MIST	10	
FOG	11	
SMOKE	12	
VOLCANIC ASH	13	
WIDESPREAD DUST	14	
SAND	15	
HAZE	16	
WELL-DEVELOPED DUST/SAND WHIRLS	17	
SQUALLS	18	
FUNNEL CLOUDS	19	
SANDSTORM	20	
DUSTSTORM	21	
UNDEFINED	22 THROUGH 31	

DFI NAME
287 BASE ACTUAL WEATHER

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
----- FOR DUI 002 -----		
NO STATEMENT	0	
SHALLOW	1	
PATCHES	2	
LOW DRIFTING	3	
BLOWING	4	
SHOWERS	5	
THUNDERSTORMS	6	
SUPERCOOLED	7	
----- FOR DUI 003 -----		
NO STATEMENT	0	
LIGHT	1	
MODERATE	2	
HEAVY	3	
IN THE VICINITY	4	
UNDEFINED	5 THROUGH 7	

B-188

MIL-STD-6016B
APPENDIX B

DFI NAME
288 UNIT/MISSION TYPE

DEFINITION
DEFINES THE UNIT/MISSION TYPE OF THE PARTICIPATING OR
REPORTING UNIT IN A COMMUNICATION NETWORK.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 UNIT TYPE [4 BIT]	DEFINES THE UNIT TYPE IN CONJUNCTION WITH THE ORIGINATOR ENVIRONMENT/ CATEGORY FIELD.	J2.0I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		

FOR E/C 0 (SURFACE)		

NO STATEMENT	0	
UNDEFINED	1	
AIRCRAFT CARRIER (CV)	2	
CRUISER (CRU)	3	
DESTROYER (DD)/ANTIAIR WARFARE (AAW)	4	
DESTROYER (DD)/ ANTISUBMARINE WARFARE (ASW)	5	
DESTROYER (DD)/ESCORT GENERAL	6	
FAST PATROL BOAT	7	
LHA/LHD	8	
AMPHIBIOUS COMMAND SHIP (LCC)	9	
FRIGATE	10	
MINE WARFARE VESSEL	11	
AUXILIARY	12	
UNDEFINED	13 THROUGH 15	

DFI NAME
288 UNIT/MISSION TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
----- FOR E/C 1 (SUBSURFACE) -----		
NO STATEMENT	0	
UNDEFINED	1 THROUGH 15	
----- FOR E/C 2 (LAND) -----		
NO STATEMENT	0	
TACTICAL AIR OPERATIONS CENTER (TAOC)	1	
TACTICAL AIR CONTROL CENTER (TACC)	2	
TACTICAL SUPPORT CENTER/ MOBILE MINIATURE OPERATION COMMAND CENTER (TSC/MOCC)/MARITIME HEADQUARTERS	3	
BUFFER CENTER	4	
CONTROL AND REPORTING CENTER (CRC)	5	
CONTROL AND REPORTING POST (CRP)	6	
NORAD CONTROL CENTER (NCC)	7	
REGIONAL CONTROL CENTER (RCC)	8	
DIRECTION CENTER (DC)	9	
ARMY AIR DEFENSE COMMAND POST (AADCP)	10	
UNDEFINED	11 THROUGH 15	

DFI NAME
288 UNIT/MISSION TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
----- FOR E/C 3 (AIR) -----		
NO STATEMENT	0	
PATROL AIRCRAFT (VP)	1	
ANTISUBMARINE WARFARE	2	
AIRCRAFT (VS)		
AIRBORNE EARLY WARNING	3	
(AEW)		
AIRBORNE TACTICAL DATA	4	
SYSTEM (ATDS)		
AIRBORNE WARNING AND	5	
CONTROL SYSTEM (AWACS)		
HELICOPTER (HELO)	6	
UNDEFINED	7 THROUGH 15	

DFI NAME DEFINITION
289 DELTA LATITUDE SPECIFIES THE POSITION OF A POINT AS AN OFFSET IN UNITS OF MINUTES OF ARC FROM A DESIGNATED REFERENCE POINT.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
003 DELTA LATITUDE, 0.0313 MINUTE 1 [14 BIT]	SPECIFIES THE POSITION OF A POINT AS AN OFFSET IN UNITS OF MINUTES OF ARC FROM A DESIGNATED REFERENCE POINT.	J3.0C1 J7.6C2
004 DELTA LATITUDE, 0.0313 MINUTE 2 [14 BIT]	SPECIFIES THE POSITION OF A POINT AS AN OFFSET IN UNITS OF MINUTES OF ARC FROM A DESIGNATED REFERENCE POINT.	J3.0C1 J7.6C2

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 003 AND 004 -----		
0 DIFFERENCE	0	
+0.0313 THROUGH	1 THROUGH 8191	
+256.3783 MINUTES		
NO STATEMENT	8192	
-256.3783 THROUGH	8193 THROUGH 16383	
-0.0313 MINUTES		

IN 0.0313 MINUTE INCREMENTS WITH
TWO'S COMPLEMENT CODING.

DFI NAME DEFINITION
290 DELTA LONGITUDE SPECIFIES THE POSITION OF A POINT AS AN OFFSET IN UNITS OF MINUTES OF ARC FROM A DESIGNATED REFERENCE POINT.

DATA STANDARD USAGE: Link 16 STATUS:

DUI	NAME	EXPLANATION	APPLICABILITY
003	DELTA LONGITUDE, 0.0313 MINUTE 1 [14 BIT]	SPECIFIES THE POSITION OF A POINT AS AN OFFSET IN UNITS OF MINUTES OF ARC FROM A DESIGNATED REFERENCE POINT.	J3.0C1 J7.6C2
004	DELTA LONGITUDE, 0.0313 MINUTE 2 [14 BIT]	SPECIFIES THE POSITION OF A POINT AS AN OFFSET IN UNITS OF MINUTES OF ARC FROM A DESIGNATED REFERENCE POINT.	J3.0C1 J7.6C2

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 003 AND 004 -----		
0 DIFFERENCE	0	IN 0.0313 MINUTE INCREMENTS WITH
+0.0313 THROUGH	1 THROUGH 8191	TWOS COMPLEMENT CODING.
+256.3783 MINUTES		
NO STATEMENT	8192	
-256.3783 THROUGH	8193 THROUGH 16383	
-0.0313 MINUTES		

DFI NAME
291 LINK 4A ADDRESS

DEFINITION
THE ADDRESS OF A SPECIFIC AIRCRAFT ON LINK 4A.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME

EXPLANATION

APPLICABILITY

001 LINK 4A ADDRESS
[13 BIT]

THE ADDRESS OF A SPECIFIC AIRCRAFT
ON TACTICAL DATA INFORMATION LINK
LINK 4A.

J2.2C2 J2.3C2 J2.4C2
J10.3E0

DATA ITEM

BIT CODE

EXPLANATION

----- FOR DUI 001 -----

NUMERIC

00000 THROUGH 17777
(OCTAL)

DFI NAME DEFINITION
292 SPECIAL PROCESSING INDICATOR AN INDICATOR OF WHETHER OR NOT SPECIAL PROCESSING IS REQUIRED FOR A MESSAGE.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
002 SPECIAL PROCESSING INDICATOR [1 BIT] (SPI)	INDICATES THAT A MESSAGE REQUIRES SPECIAL PROCESSING.	J3.0I	J3.1I	J3.2I
		J3.3I	J3.4I	J3.5I
		J3.6I	J3.7I	J5.4I
		J6.0I	J14.0I	

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 002 -----		
SPECIAL PROCESSING NOT REQUIRED	0	
SPECIAL PROCESSING REQUIRED	1	

DFI NAME DEFINITION
293 MODE I CODE PROVIDES MODE I BEACON REPLY INFORMATION.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
003 MODE I CODE [5 BIT]	PROVIDES MODE I BEACON REPLY	J2.0C1	J2.2C1	J2.3C1
	INFORMATION. WITHIN THE MODE	J2.4C1	J3.1C1	J3.2C1
	FIELD, SIF CODES ARE IN THE ORDER	J3.3C1	J3.4C1	J3.5C1
	A4 A2 A1 B2 B1. THE LEAST	J7.5I		
	SIGNIFICANT DIGIT CANNOT BE			
	GREATER THAN 3.			

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 003 -----		
0 (NO STATEMENT)	00 (OCTAL)	THIS CODE CANNOT BE ASSIGNED AS AN OPERATIONAL CODE. INDICATES THERE ARE NO DATA FOR TRANSMISSION.
1	01 (OCTAL)	
2	02 (OCTAL)	
3	03 (OCTAL)	
4	10 (OCTAL)	
5	11 (OCTAL)	
6	12 (OCTAL)	
7	13 (OCTAL)	
8	20 (OCTAL)	
9	21 (OCTAL)	
10	22 (OCTAL)	
11	23 (OCTAL)	
12	30 (OCTAL)	
13	31 (OCTAL)	
14	32 (OCTAL)	
15	33 (OCTAL)	
16	40 (OCTAL)	
17	41 (OCTAL)	
18	42 (OCTAL)	
19	43 (OCTAL)	
20	50 (OCTAL)	
21	51 (OCTAL)	
22	52 (OCTAL)	
23	53 (OCTAL)	
24	60 (OCTAL)	
25	61 (OCTAL)	

DFI NAME
293 MODE I CODE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
26	62 (OCTAL)	
27	63 (OCTAL)	
28	70 (OCTAL)	
29	71 (OCTAL)	
30	72 (OCTAL)	
31	73 (OCTAL)	

DFI	NAME	DEFINITION
294	MODE II CODE	PROVIDES MODE II BEACON REPLY INFORMATION.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
002 MODE II CODE [12 BIT]	PROVIDES MODE II BEACON REPLY INFORMATION.	J2.0C1	J2.2C1	J2.3C1
		J2.4C1	J3.1C1	J3.2C1
		J3.3C1	J3.4C1	J3.5C1
		J7.5I		

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 002 -----		
NO STATEMENT	0	THIS CODE CANNOT BE ASSIGNED AS AN OPERATIONAL CODE. INDICATES THERE ARE NO DATA FOR TRANSMISSION.
1 THROUGH 7777 (OCTAL)	0001 THROUGH 7777 (OCTAL)	WITHIN THE FIELD, SIF CODES ARE IN THE ORDER A, B, C, D WITH EACH TRIAD IN THE ORDER 4, 2, 1.

DFI NAME DEFINITION
295 MODE III CODE PROVIDES MODE III BEACON REPLY INFORMATION.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
002 MODE III CODE [12 BIT]	PROVIDES MODE III BEACON REPLY INFORMATION.	J2.0C1 J2.4C1 J3.3C1 J7.5I	J2.2C1 J3.1C1 J3.4C1	J2.3C1 J3.2C1 J3.5C1
003 MODE III CODE, 1 [12 BIT]	PROVIDES MODE III BEACON CODE WHICH IS ASSIGNED BY THE NEW CONTROLLING UNIT TO THE CONTROLLED AIRCRAFT.	J10.3C1	J12.4E0	

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 002 -----		
NO STATEMENT	0	THIS CODE CANNOT BE ASSIGNED AS AN OPERATIONAL CODE. INDICATES THERE ARE NO DATA FOR TRANSMISSION.
1 THROUGH 7777 (OCTAL)	0001 THROUGH 7777 (OCTAL)	WITHIN THE FIELD, SIF CODES ARE IN THE ORDER A, B, C, D WITH EACH TRIAD IN THE ORDER 4, 2, 1.
----- FOR DUI 003 -----		
NO STATEMENT	0	THIS CODE CANNOT BE ASSIGNED AS AN OPERATIONAL CODE. INDICATES THERE ARE NO DATA FOR TRANSMISSION.
1 THROUGH 7777 (OCTAL)	0001 THROUGH 7777 (OCTAL)	WITHIN THE FIELD, SIF CODES ARE IN THE ORDER A, B, C, D WITH EACH TRIAD IN THE ORDER 4, 2, 1.

DFI	NAME	DEFINITION
296	SPECIAL CODE APPLICABILITY	SPECIFIES WHICH SPECIAL CODES WITHIN A PARTICULAR MESSAGE ARE APPLICABLE.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 SPECIAL CODE I APPLICABILITY [1 BIT] (I)	SPECIFIES WHETHER THE SPECIAL CODE I IS OR IS NOT APPLICABLE TO THE MESSAGE.	J7.5I
002 SPECIAL CODE II APPLICABILITY [1 BIT] (II)	SPECIFIES WHETHER THE SPECIAL CODE II IS OR IS NOT APPLICABLE TO THE MESSAGE.	J7.5I
003 SPECIAL CODE III APPLICABILITY [1 BIT] (III)	SPECIFIES WHETHER THE SPECIAL CODE III IS OR IS NOT APPLICABLE TO THE MESSAGE.	J7.5I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
SPECIAL CODE I IS NOT APPLICABLE	0	
SPECIAL CODE I IS APPLICABLE	1	
----- FOR DUI 002 -----		
SPECIAL CODE II IS NOT APPLICABLE	0	
SPECIAL CODE II IS APPLICABLE	1	
----- FOR DUI 003 -----		
SPECIAL CODE III IS NOT APPLICABLE	0	
SPECIAL CODE III IS APPLICABLE	1	

DFI	NAME	DEFINITION
298	MODE IV INDICATOR	THE MODE IV BEACON REPLY.

DATA STANDARD USAGE: Link 16	STATUS:
------------------------------	---------

DUI NAME	EXPLANATION	APPLICABILITY
001 MODE IV INDICATOR [2 BIT] (M4 IND)	THE MODE IV BEACON REPLY.	J3.1C1 J3.2C1 J3.3C1 J3.4C1 J3.5C1 J7.5I J12.6C1

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NOT INTERROGATED/NO STATEMENT	0	
INTERROGATED, NO RESPONSE	1	
INTERROGATED, INVALID RESPONSE	2	
INTERROGATED, VALID RESPONSE	3	

DFI	NAME	DEFINITION
299	TRACK NUMBER APPLICABILITY	SPECIFIES WHICH TRACK NUMBERS WITHIN A PARTICULAR MESSAGE ARE APPLICABLE.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 LINK 11/LINK 11B TRACK NUMBER APPLICABILITY [1 BIT] (11/11B TN)	SPECIFIES WHETHER THE LINK 11/LINK 11B TRACK NUMBER IS OR IS NOT APPLICABLE TO THE MESSAGE.	J7.4I
002 NATO LINK 1 TRACK NUMBER APPLICABILITY [1 BIT] (NTO TN)	SPECIFIES WHETHER THE NATO LINK 1 TRACK NUMBER IS OR IS NOT APPLICABLE TO THE MESSAGE.	J7.4I
003 ATDL-1 TRACK NUMBER APPLICABILITY [1 BIT] (ATL TN)	SPECIFIES WHETHER THE ATDL-1 TRACK NUMBER IS OR IS NOT APPLICABLE TO THE MESSAGE.	J7.4I
004 IJMS, SYSTEM REFERENCE NUMBER APPLICABILITY [1 BIT] (IJM SRN)	SPECIFIES WHETHER THE IJMS, SYSTEM REFERENCE NUMBER IS OR IS NOT APPLICABLE TO THE MESSAGE.	J7.4I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
LINK 11/LINK 11B TN IS NOT APPLICABLE	0	
LINK 11/LINK 11B TN IS APPLICABLE	1	
----- FOR DUI 002 -----		
NATO LINK 1 TN IS NOT APPLICABLE	0	
NATO LINK 1 TN IS APPLICABLE	1	
----- FOR DUI 003 -----		
ATDL-1 TN IS NOT APPLICABLE	0	
ATDL-1 TN IS APPLICABLE	1	

DFI NAME
299 TRACK NUMBER APPLICABILITY

DATA ITEM (CONTINUED) ----- FOR DUI 004 -----	BIT CODE	EXPLANATION
IJMS, SRN IS NOT APPLICABLE	0	
IJMS, SRN IS APPLICABLE	1	

DFI NAME DEFINITION
312 CYCLE

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 END OF TARGET REPORTING CYCLE [1 BIT] (EOTRC)	INDICATES ALL TARGETS HELD BY THE SENDING UNIT HAVE BEEN SENT.	J12.6C2 J12.7I

DATA ITEM	BIT CODE	EXPLANATION
-----------	----------	-------------

----- FOR DUI 001 -----

NO STATEMENT	0	
THE TARGET IS THE LAST TARGET IN AN UPDATE SEQUENCE TO BE TRANSMITTED	1	INDICATES THAT THE TARGET IS THE LAST TARGET TO BE TRANSMITTED IN THE SENDER'S TARGET REPORTING CYCLE. THE NEXT TARGET TO BE TRANSMITTED WILL BE THE BEGINNING OF THE NEXT CYCLE. THIS INDICATES THAT A COMPLETE SET OF TARGETS HAS BEEN TRANSMITTED. THIS PROVIDES THE RECEIVER WITH AN INDICATION THAT ALL TARGETS HELD BY THE SENDING UNIT HAVE BEEN TRANSMITTED.

DFI NAME DEFINITION
325 INDICATOR

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 HANDOVER INDICATOR [1 BIT] (H/I)	INDICATES THAT A HANDOVER OF CONTROL OF A REFERENCE TRACK IS IN PROGRESS.	J10.5I
002 MERGED MEASUREMENT INDICATOR [1 BIT] (MM IND)	INDICATES A SENSOR CAN DETECT MORE THAN ONE TARGET BUT CANNOT SEPARATE THEM.	J12.7I
003 TEXT INDICATOR [2 BIT] (TXT IND)	INDICATES THE NUMBER OF TEXT CONTINUATION WORDS ASSOCIATED WITH THE POINTER.	J7.3I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
HANDOVER IN PROGRESS	1	
----- FOR DUI 002 -----		
NO STATEMENT	0	
MULTIPLE TARGETS	1	
----- FOR DUI 003 -----		
NO ASSOCIATED TEXT	0	
ASSOCIATED TEXT (C2 PRESENT)	1	
ASSOCIATED TEXT (C2&C3 PRESENT)	2	
UNDEFINED	3	

DFI NAME DEFINITION
342 EMITTER STATUS

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 EMITTER STATUS [3 BIT]	REPORTS THE STATUS OF THE TARGET'S EMITTER.	J12.6C2 J12.7E1

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
INACTIVE	1	TARGET'S EMITTER IS INACTIVE OR NOT DETECTED.
TARGET EMITTER ACTIVE	2	TARGET'S EMITTER IS ACTIVE. MODE NOT SPECIFIED.
TARGET EMITTER IN SEARCH	3	TARGET EMITTER IN SEARCH MODE.
TARGET EMITTER IN TRACK	4	TARGET EMITTER IN TRACKING MODE.
MISSILE LAUNCH	5	TARGET HAS LAUNCHED A MISSILE.
UNDEFINED	6 THROUGH 7	

DFI NAME DEFINITION
348 NET NUMBER A REFERENCE NUMBER USED DURING MULTI-NET OPERATIONS TO
UNIQUELY IDENTIFY EACH NET ESTABLISHED BY CODE DIVISION
MULTIPLIER TECHNIQUES.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
001 NET NUMBER [7 BIT]		J0.6C3		
002 NET NUMBER, NONC2 JU-TO-NONC2 JU NPG A [7 BIT]	INDICATES THE NONC2 JU-TO-NONC2 JU NPG NET NUMBER ON WHICH SOURCE TN IS ASSIGNED TO OPERATE.	J2.2I		
003 NET NUMBER, NONC2 JU-TO-NONC2 JU NPG B [7 BIT]	INDICATES THE SECONDARY NONC2 JU-TO- NONC2 JU NPG NET NUMBER ON WHICH THE SOURCE TN IS ASSIGNED TO OPERATE.	J2.2C5		
004 NET NUMBER, RECEIVE [7 BIT]		J0.4E0		
005 NET NUMBER, TRANSMIT [7 BIT]		J0.4E0		
006 CONTROL CHANNEL [7 BIT]		J2.2C2 J2.5C1 J10.3C1	J2.3C2 J2.6C1 J12.4I	J2.4C2 J9.0C1
007 NET NUMBER, RELAY [7 BIT]	SPECIFIES THE NET NUMBER OF THE RECEIVE ASSIGNMENT IN THOSE TIME SLOTS SPECIFIED BY THE RELAY DELAY, RECEIVE FIELD.	J0.3C1		
008 NET NUMBER, 3 [7 BIT]		J0.6C4		
010 NET NUMBER, DEFAULT [7 BIT]	INDICATES THE NET NUMBER THE TERMINAL IS TO MONITOR WHEN NOT IMPLEMENTING A SPECIFIC RECEIVE, TRANSMIT, OR RELAY ASSIGNMENT.	J1.5I		

DFI NAME
348 NET NUMBER

DUI NAME	EXPLANATION	APPLICABILITY
011 NET NUMBER, NET STATUS PARTICIPATION GROUP [7 BIT]		J1.5E0
012 NET NUMBER, ORIGINAL NET [7 BIT]	THE NET NUMBER USED BY THE ORIGINAL TRANSMITTER FOR THE PARTITIONED VARIABLE MODE. THIS PERMITS AN INTERMEDIATE RELAY IN A MULTIHOP RELAY PATH TO DECRYPT THE RECEIVED MESSAGE.	J0.4C1
013 NET NUMBER, 1 [7 BIT]		J0.6C4
014 NET NUMBER, 2 [7 BIT]		J0.6C4
015 NET NUMBER, 4 [7 BIT]		J0.6C4
016 NET NUMBER, 5 [7 BIT]		J0.6C4
017 NET NUMBER, 6 [7 BIT]		J0.6C4
018 ZOOM RELAY TRANSMIT NET [7 BIT]		J0.4I
019 TIME SLOT OFFSET, CONTROL NET ENTRY [7 BIT]	INDICATES THE NUMBER OF TIME SLOTS BETWEEN THE NET STATUS PG TIME SLOTS AND THE CONTROL NET ENTRY TIME SLOT OF THE TERMINAL. THE CONTROL NET ENTRY TIME SLOT IS DE- FINED AS A POSITIVE OFFSET FROM THE SLOT IN WHICH THE MESSAGE WAS RECEIVED.	J1.4I J1.5E0
020 NET NUMBER, CONTROL NET ENTRY [7 BIT]	INDICATES THE NET NUMBER OF THE TER- MINALS CONTROL NET ENTRY RECEIVE SLOT.	J1.4I J1.5E0

DFI NAME
348 NET NUMBER

DUI NAME	EXPLANATION	APPLICABILITY
021 NET NUMBER, SPECIFIED [7 BIT]	INDICATES THE NET NUMBER OF THE TIME SLOT EXPLICITLY SPECIFIED.	J0.3E0
022 NET NUMBER, DECRYPTION [7 BIT]	SPECIFIES THE NET NUMBER TO BE USED FOR MESSAGE DECRYPTION WHEN THE TIME SLOT ASSIGNMENT TYPE FIELD IS SET TO RECEIVE, THE CRYPTOMODE INDICATOR FIELD IS SET TO PARTITIONED VARIABLE MODE, AND THE TIME SLOT ASSIGNMENT QUALIFIER FIELD IS SET TO ZERO.	J0.3C1
023 NET NUMBER, 7 [7 BIT]		J0.6C4

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001, 007, 012, 018, AND 020-022 -----		
NUMERIC NO STATEMENT	0 THROUGH 126 127	
----- FOR DUIS 002-003 -----		
NUMERIC NO STATEMENT	0 THROUGH 126 127	ASSIGNED NPG NET NUMBER.
----- FOR DUIS 004-005, 008, 010, 011, 013-017, AND 023 -----		
ASSIGNED NET NO STATEMENT	0 THROUGH 126 127	
----- FOR DUI 006 -----		
CONTROL CHANNEL NUMBER NO STATEMENT	0 THROUGH 126 127	

DFI NAME
348 NET NUMBER

DATA ITEM (CONTINUED)
----- FOR DUI 019 -----

ILLEGAL
NUMERIC

BIT CODE

0 THROUGH 16
17 THROUGH 127

EXPLANATION

APPENDIX B

DFI NAME DEFINITION
349 SONOBUOY TYPE IDENTIFIES THE SONOBUOY TYPE.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 SONOBUOY TYPE [4 BIT]	IDENTIFIES THE SONOBUOY TYPE. INTER- PRETED ONLY WHEN ASW POINT AMPLIFY IN J3.0I IS 9 (SONOBUOY POSITION) OR 10 (SONOBUOY PATTERN REFERENCE POSITION).	J3.0C3
002 SONOBUOY TYPE, 1 [4 BIT]	IDENTIFIES THE SONOBUOY TYPE. INTERPRETED ONLY WHEN ASW POINT AMPLIFY IN J3.0I IS 9 (SONOBUOY POSITION) OR 10. (SONOBUOY PATTERN REFERENCE POSITION).	J3.0C4

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
BT	1	BATHYTHERMOGRAPH.
LOFAR	2	LOW FREQUENCY ANALYSIS AND RECORDING.
RO	3	RANGE ONLY.
DIFAR	4	DIRECTIONAL LOFAR.
VLA	5	VERTICAL LINE ARRAY.
CAMBS	6	COMMAND ACTIVATED MULTIBEAM SONOBUOY.
BARRA	7	
DISUSED	8	
DISUSED	9	
VLAD	10	VERTICAL LINE ARRAY DIFAR.
DISUSED	11	
WIDE BAND LOFAR	12	
DICASS	13	DIRECTIONAL COMMAND ACTIVATED SONOBUOY SYSTEM.
ADAR	14	AIR DEPLOYABLE ACTIVE RECEIVER.
NUAMP	15	NAVAL UNDERWATER ACTIVE MULTIPLE PING.

DFI NAME
349 SONOBUOY TYPE

DATA ITEM (CONTINUED) ----- FOR DUI 002 -----	BIT CODE	EXPLANATION
NO STATEMENT	0	
HIDAR	1	HIGH INSTANTANEOUS DYNAMIC RANGE DIFAR.
SSQ110	2	ACTIVE LOW FREQUENCY EXPLOSIVE ACOUSTIC.
CAMBS6	3	COMMAND ACTIVATED MULTIBEAM SONOBUOY VERSION 6.
ALFEA	4	ACTIVE LOW FREQUENCY ELECTRO ACOUSTIC.
SSQ911	5	UK ACTIVE LOW FREQUENCY EXPLOSIVE ACOUSTIC.
SSQ981D	6	PROGRAMMABLE BARRA.
UNDEFINED	7 THROUGH 15	UNDEFINED.

APPENDIX B

DFI NAME DEFINITION
 350 SONOBUOY PATTERN IDENTIFIES AND DESCRIBES THE SONOBUOY PATTERN.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 SONOBUOY PATTERN [4 BIT]	REPORTS THE GENERIC NAME FOR SONOBUOY PATTERN. INTERPRETED ONLY WHEN ASW POINT AMPLIFY IN THIS MESSAGE IS 10 (PATTERN).	J3.0C3
002 SONOBUOY TYPE NUMBER [5 BIT]	INDICATES TYPE NUMBER OF SONOBUOYS IN THE SONOBUOY PATTERN. INTERPRETED ONLY WHEN ASW POINT AMPLIFY IN THIS MESSAGE IS 10 (PATTERN).	J3.0C3
003 SONOBUOY SPACING [9 BIT]	REPORTS THE DISTANCE BETWEEN EACH SONOBUOY IN THE SONOBUOY PATTERN. INTERPRETED ONLY WHEN ASW POINT AMPLIFY IN THIS MESSAGE IS 10 (PATTERN).	J3.0C3
004 SONOBUOY ROW SPACING [9 BIT]	INDICATES THE DISTANCE BETWEEN EACH ROW IN THE SONOBUOY PATTERN. INTERPRETED ONLY WHEN ASW POINT AMPLIFY IN THIS MESSAGE IS 10 (PATTERN).	J3.0C3
005 SONOBUOY PATTERN RADIUS [9 BIT]	REPORTS THE DISTANCE FROM THE CENTER TO THE OUTER EDGE OF A CIRCULAR PATTERN IN INCREMENTS OF 125 YARDS. INTERPRETED ONLY WHEN ASW POINT AMPLIFY IN THIS MESSAGE IS 10 (PATTERN).	J3.0C3

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
BARRIER	1	
WEDGE	2	
CIRCLE (NO CENTER BUOY)	3	
CIRCLE (CENTER BUOY)	4	
BRUSHTAC	5	

DFI NAME
350 SONOBUOY PATTERN

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
DISTRIBUTIVE	6	
UNDEFINED	7 THROUGH 15	
----- FOR DUI 002 -----		
NO STATEMENT	0	
NUMBER	1 THROUGH 31	
----- FOR DUIS 003-005 -----		
NO STATEMENT	0	
125 THROUGH 63,875 YARDS	1 THROUGH 511	

DFI	NAME	DEFINITION
351	ALTERNATE FIELD INDICATOR	CHANGES THE DATA FIELD IDENTIFIER (DFI) CONTENT WITHIN A MESSAGE OR THE MEANING OF A DFI.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
006 SQUARE/CIRCLE SWITCH, 1 [2 BIT] (S/C SW1)	USED IN CONJUNCTION WITH THE LATITUDE; LONGITUDE; AREA MAJOR AXIS, 1; AREA MINOR AXIS, 1; AND AXIS ORIENTATION, 1 FIELDS TO DESCRIBE AN AREA.	J7.6C1
009 SQUARE/CIRCLE SWITCH [2 BIT] (S/C SW)	USED IN CONJUNCTION WITH THE LATITUDE, LONGITUDE, AREA MAJOR AXIS, AREA MINOR AXIS, AND AXIS ORIENTATION FIELDS TO DESCRIBE AN AREA.	J3.0C2 J3.0C5 J3.5C3 J3.7I J14.0I J14.2E0
012 SQUARE/CIRCLE SWITCH, 2 [2 BIT] (S/C SW2)	USED IN CONJUNCTION WITH THE LATITUDE; LONGITUDE; AREA MAJOR AXIS, 2; AREA MINOR AXIS, 2; AND AXIS ORIENTATION, 2 FIELDS TO DESCRIBE AN AREA.	J7.6C1
015 TIME SLOT ASSIGNMENT QUALIFIER [1 BIT] (TSA QLA)	QUALIFIES THE USE OF THE EXPLICIT TIME SLOT BLOCK AND THE OFFSET TIME SLOT SPECIFIED BY THE RELAY DELAY.	J0.3E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 006, 009, AND 012 -----		
NO STATEMENT	0	
SQUARE/RECTANGULAR	1	IF AREA MAJOR AND AREA MINOR AXES ARE EQUAL THE AREA DESCRIBED IS A SQUARE. IF THE AXES ARE NOT EQUAL THE AREA DESCRIBED IS A RECTANGLE.
CIRCULAR/ELLIPTICAL	2	IF AREA MAJOR AND AREA MINOR AXES ARE EQUAL THE AREA DESCRIBED IS A CIRCLE. IF THE AXES ARE NOT EQUAL THE AREA IS AN ELLIPSE.
UNDEFINED	3	

APPENDIX B

DFI NAME
351 ALTERNATE FIELD INDICATOR

DATA ITEM (CONTINUED)
----- FOR DUI 015 -----

BIT CODE

EXPLANATION

QUALIFIER 0

0

INDICATES WHEN THE TIME SLOT
ASSIGNMENT TYPE FIELD IS SET TO
TRANSMIT THAT THE OFFSET TIME SLOT
SPECIFIED BY RELAY DELAY, RECEIVE
FIELD IS FOR RECEPTION OF AN
ORIGINAL MESSAGE. INDICATES WHEN
THE TIME SLOT ASSIGNMENT TYPE
FIELD IS SET TO RECEIVE AND THE
CRYPTOMODE INDICATOR FIELD IS SET
TO THE PARTITIONED VARIABLE MODE
THAT THE RECEIVE ASSIGNMENT IN THE
EXPLICIT TIME SLOT IS FOR
RECEPTION OF A RELAYED MESSAGE AND
THE OFFSET TIME SLOT SPECIFIED BY
THE RELAY DELAY, RECEIVE FIELD IS
TO BE USED ONLY FOR DATA
DECRYPTION. INDICATES WHEN TIME
SLOT ASSIGNMENT TYPE FIELD IS SET
TO RECEIVE AND THE CRYPTOMODE
INDICATOR FIELD IS SET TO THE
COMMON VARIABLE MODE THAT THE
RECEIVE ASSIGNMENT IN THE EXPLICIT
TIME SLOT AND IN THE OFFSET TIME
SLOT ARE FOR RECEPTION OF ORIGINAL
MESSAGES.

QUALIFIER 1

1

INDICATES WHEN THE CRYPTOMODE
INDICATOR FIELD IS SET TO THE
PARTITIONED VARIABLE MODE THAT THE
EXPLICIT TIME SLOT IS FOR
TRANSMISSION OR RECEPTION OF
ORIGINAL MESSAGES AND THE OFFSET
TIME SLOT SPECIFIED BY THE RELAY
DELAY, RECEIVE FIELD IS FOR
RECEPTION OF RELAYED MESSAGES.
WHEN THE CRYPTOMODE INDICATOR
FIELD IS SET TO THE COMMON
VARIABLE MODE THE OFFSET TIME SLOT
SPECIFIED BY RELAY DELAY, RECEIVE
FIELD IS FOR RECEPTION OF A RELAY

APPENDIX B

DFI	NAME			
351	ALTERNATE FIELD INDICATOR			
	DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION	
	(CONTINUED)		OF THE EXPLICIT TIME SLOT.	

DFI NAME DEFINITION
352 TRACK NUMBER, IJMS A REFERENCE NUMBER USED IN THE INTERIM JTIDS/MIDS MESSAGE SPECIFICATION.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 IJMS, SYSTEM REFERENCE NUMBER [15 BIT]	A STANDARD SYSTEM REFERENCE NUMBER (SRN) CONSISTING OF FIVE OCTAL DIGITS USED TO IDENTIFY ALL SYSTEM ENTITIES ON IJMS.	J7.4E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
ILLEGAL NUMERIC	00000 (OCTAL) 00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR PUS.
ILLEGAL NUMERIC	00077 (OCTAL) 00100 THROUGH 00176 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR RUS.
NUMERIC NUMERIC	00177 (OCTAL) 00200 THROUGH 07776 (OCTAL)	COLLECTIVE ADDRESS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JTIDS/MIDS EQUIPPED UNITS. SRNS NOT ASSIGNED TO JTIDS/MIDS EQUIPPED UNITS ARE ALLOCATED IN BLOCKS TO BE USED FOR TACTICAL INFORMATION REPORTING.
NUMERIC NUMERIC	07777 (OCTAL) 10000 THROUGH 77776 (OCTAL)	RESERVED FOR SPECIAL PURPOSE. ASSIGNED AS IDENTIFICATION NUMBERS FOR JTIDS/MIDS EQUIPPED UNITS. SRNS NOT ASSIGNED TO JTIDS/MIDS EQUIPPED UNITS ARE ALLOCATED IN BLOCKS TO BE USED FOR TACTICAL INFORMATION REPORTING.
ILLEGAL	77777 (OCTAL)	

B-218

MIL-STD-6016B
APPENDIX B

APPENDIX B

DFI NAME DEFINITION
353 UNCERTAINTY INDEX PROVIDES UNCERTAINTY VALUES FOR POSITIONS AND VELOCITY.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 SLANT RANGE POSITION UNCERTAINTY [4 BIT]	PROVIDES AN ESTIMATE OF TARGET POSITION UNCERTAINTY ALONG THE MEASUREMENT AXIS DEFINED ALONG THE LINE BETWEEN THE OBSERVER POSITION AND THE TARGET POSITION. THE UNCERTAINTY SHALL BE CALCULATED AS THE ROOT-SUM-SQUARE OF THE MEAN OF TARGET MEASUREMENT ERROR, THE STANDARD DEVIATION OF THE TARGET MEASUREMENT ERROR, THE MEAN OF THE OBSERVER POSITION ERROR, AND THE STANDARD DEVIATION OF THE OBSERVER POSITION ERROR ALONG THE AXIS. THE MEAN SHALL REFLECT ALL KNOWN BIASES SUCH AS SENSOR BORESIGHTING ERRORS. THE STANDARD DEVIATION SHALL REFLECT ERRORS DUE TO MEASUREMENT NOISE. THE STANDARD DEVIATION DESCRIBES A 2 SIGMA REGION AROUND THE MEAN (-SIGMA TO SIGMA).	J12.6C3
002 CROSS RANGE POSITION UNCERTAINTY [4 BIT]	PROVIDES AN ESTIMATE OF TARGET POSITION UNCERTAINTY ALONG THE MEASUREMENT AXIS DEFINED ALONG A HORIZONTAL AXIS PERPENDICULAR TO THE SLANT RANGE POSITION UNCERTAINTY AXIS. THE SLANT RANGE POSITION UNCERTAINTY AXIS AND THE CROSS RANGE POSITION UNCERTAINTY AXIS FORM A PLANE WITH A TILT FROM LOCAL LEVEL DESCRIBED BY THE UNCERTAINTY TILT FIELD. LOCAL LEVEL IS DEFINED AT THE LATITUDE AND LONGITUDE IN THE J12.6I WORD AND THE ALTITUDE IN THE J12.6E0 WORD. THE UNCERTAINTY SHALL BE CALCULATED AS THE ROOT-SUM-SQUARE OF THE MEAN TARGET MEASUREMENT	J12.6C3

APPENDIX B

DFI NAME
353 UNCERTAINTY INDEX

DUI NAME	EXPLANATION	APPLICABILITY
002 (CONTINUED)	ERROR, THE STANDARD DEVIATION OF THE TARGET MEASUREMENT ERROR, THE MEAN OF THE OBSERVER POSITION ERROR, AND THE STANDARD DEVIATION OF THE OBSERVER POSITION ERROR ALONG THE AXIS. THE MEAN SHALL REFLECT ALL KNOWN BIASES SUCH AS SENSOR BORESIGHTING ERRORS. THE STANDARD DEVIATION SHALL REFLECT ERRORS DUE TO MEASUREMENT NOISE. THE STANDARD DEVIATION DESCRIBES A 2 SIGMA REGION AROUND THE MEAN (-SIGMA TO SIGMA). THE MEASUREMENT AXES ALONG WHICH THE SLANT RANGE POSITION UNCERTAINTY AND VERTICAL POSITION UNCERTAINTY ARE DEFINED ARE MUTUALLY ORTHOGONAL.	
003 VERTICAL POSITION UNCERTAINTY [4 BIT]	PROVIDES AN ESTIMATE OF TARGET POSITION UNCERTAINTY ALONG THE MEASUREMENT AXIS DEFINED ALONG A VERTICAL AXIS PERPENDICULAR TO THE SLANT RANGE POSITION UNCERTAINTY AXIS. THE VERTICAL POSITION UNCERTAINTY AXIS AND THE SLANT RANGE POSITION UNCERTAINTY AXIS FORM A PLANE WITH AN ORIENTATION FROM TRUE NORTH DESCRIBED BY THE UNCERTAINTY ORIENTATION FIELD. THE UNCERTAINTY SHALL BE CALCULATED AS THE ROOT-SUM-SQUARE OF THE MEAN TARGET MEASUREMENT ERROR, THE STANDARD DEVIATION OF THE TARGET MEASUREMENT ERROR, THE MEAN OF THE OBSERVER POSITION ERROR, AND THE STANDARD DEVIATION OF THE OBSERVER POSITION ERROR ALONG THIS AXIS. THE MEAN SHALL REFLECT ALL KNOWN BIASES SUCH AS SENSOR BORESIGHTING	J12.6C3

APPENDIX B

DFI NAME
353 UNCERTAINTY INDEX

DUI NAME
003 (CONTINUED)

EXPLANATION

APPLICABILITY

ERRORS. THE STANDARD DEVIATION SHALL REFLECT ERRORS DUE TO MEASUREMENT NOISE. THE STANDARD DEVIATION DESCRIBES A 2 SIGMA REGION AROUND THE MEAN (-SIGMA TO SIGMA). THE MEASUREMENT AXES ALONG WHICH THE SLANT RANGE POSITION UNCERTAINTY AND VERTICAL POSITION UNCERTAINTY ARE DEFINED ARE MUTUALLY ORTHOGONAL.

004 UNCERTAINTY ORIENTATION
[11 BIT]

THE ANGLE IN THE LOCAL LEVEL PLANE BETWEEN TRUE NORTH AND THE PROJECTION OF THE SLANT RANGE UNCERTAINTY AXIS ONTO THIS PLANE. LOCAL LEVEL IS DEFINED AT THE LATITUDE AND LONGITUDE IN THE J12.6I WORD AND THE ALTITUDE IN THE J12.6E0 WORD. A POSITIVE ANGLE IS MEASURED CLOCKWISE FROM TRUE NORTH.

J12.6C3

005 UNCERTAINTY TILT
[11 BIT]

THE ANGLE BETWEEN THE PROJECTION OF THE SLANT RANGE POSITION UNCERTAINTY AXIS ONTO THE LOCAL LEVEL PLANE AND THE SLANT RANGE POSITION UNCERTAINTY AXIS. LOCAL LEVEL IS DEFINED AT THE LATITUDE AND LONGITUDE IN THE J12.6I WORD AND THE ALTITUDE IN THE J12.6E0 WORD. A POSITIVE ANGLE IS MEASURED COUNTER-CLOCKWISE FROM LOCAL LEVEL.

J12.6C3

007 VELOCITY NORTH UNCERTAINTY
[4 BIT]

PROVIDES THE ESTIMATED VELOCITY NORTH UNCERTAINTY VALUE. THE UNCERTAINTY SHALL BE CALCULATED AS THE ROOT-SUM-SQUARE OF THE MEAN AND STANDARD DEVIATION OF THE NORTH VELOCITY ERROR ESTIMATE. THE MEAN SHALL REFLECT

J12.6C3

APPENDIX B

DFI NAME
353 UNCERTAINTY INDEX

DUI NAME	EXPLANATION	APPLICABILITY
007 (CONTINUED)	ALL KNOWN BIASES SUCH AS SENSOR BORESIGHTING ERRORS. THE STANDARD DEVIATION SHALL REFLECT ERRORS DUE TO MEASUREMENT NOISE. THE STANDARD DEVIATION (SIGMA) DESCRIBES A 2 SIGMA REGION (-SIGMA TO SIGMA) AROUND THE MEAN.	
008 VELOCITY EAST UNCERTAINTY [4 BIT]	PROVIDE THE ESTIMATED VELOCITY EAST UNCERTAINTY VALUE. THE UNCERTAINTY SHALL BE CALCULATED AS THE ROOT-SUM-SQUARE OF THE MEAN AND STANDARD DEVIATION OF THE EAST VELOCITY ERROR ESTIMATE. THE MEAN SHALL REFLECT ALL KNOWN BIASES SUCH AS SENSOR BORESIGHTING ERRORS. THE STANDARD DEVIATION SHALL REFLECT ERRORS DUE TO MEASUREMENT NOISE. THE STANDARD DEVIATION (SIGMA) DESCRIBES A 2 SIGMA REGION (-SIGMA TO SIGMA) AROUND THE MEAN.	J12.6C3
009 VELOCITY DOWN UNCERTAINTY [4 BIT]	PROVIDES THE ESTIMATED VELOCITY DOWN UNCERTAINTY VALUE. THE UNCERTAINTY SHALL BE CALCULATED AS THE ROOT-SUM-SQUARE OF THE MEAN AND STANDARD DEVIATION OF THE DOWN VELOCITY ERROR ESTIMATE. THE MEAN SHALL REFLECT ALL KNOWN BIASES SUCH AS SENSOR BORESIGHTING ERRORS. THE STANDARD DEVIATION SHALL REFLECT ERRORS DUE TO MEASUREMENT NOISE. THE STANDARD DEVIATION (SIGMA) DESCRIBES A 2 SIGMA REGION (-SIGMA TO SIGMA) AROUND THE MEAN.	J12.6C3
010 BEARING UNCERTAINTY [5 BIT]	PROVIDES THE UNCERTAINTY OF BEARING DATA. THE TARGET BEARING PROVIDED IN THE J12.7E0 WORD	J12.7E0

APPENDIX B

DFI NAME
353 UNCERTAINTY INDEX

DUI NAME
010 (CONTINUED)

EXPLANATION

APPLICABILITY

SHALL BE CALCULATED AS
ROOT-SUM-SQUARE OF THE MEAN AND
STANDARD DEVIATION OF THE BEARING
ERROR ESTIMATE. THE MEAN SHALL
REFLECT ALL KNOWN BIASES SUCH AS
SENSOR BORESIGHTING ERRORS. THE
STANDARD DEVIATION SHALL REFLECT
ERRORS DUE TO MEASUREMENT NOISE.
THE STANDARD DEVIATION (SIGMA)
DESCRIBES A 2 SIGMA REGION (-SIGMA
TO SIGMA) AROUND THE MEAN.

011 ELEVATION UNCERTAINTY
[5 BIT]

PROVIDES UNCERTAINTY OF ELEVATION
OF THE TARGET ELEVATION ANGLE
PROVIDED IN THE J12.7E0 WORD. THE
UNCERTAINTY SHALL BE CALCULATED
AS ROOT-SUM-SQUARE OF THE MEAN
AND STANDARD DEVIATION OF THE
ELEVATION ERROR ESTIMATE. THE
MEAN SHALL REFLECT ALL KNOWN
BIASES SUCH AS SENSOR BORESIGHTING
ERRORS. THE STANDARD DEVIATION
SHALL REFLECT ERRORS DUE TO
MEASUREMENT NOISE. THE STANDARD
DEVIATION (SIGMA) DESCRIBES A 2
SIGMA REGION (- SIGMA TO SIGMA)
AROUND THE MEAN.

J12.7E0

012 BEARING ANGLE RATE UNCERTAINTY
[5 BIT]

PROVIDES AN ESTIMATE OF TARGET
BEARING ANGLE RATE UNCERTAINTY.
THE UNCERTAINTY SHALL BE
CALCULATED AS THE ROOT-SUM-SQUARE
OF THE MEAN OF TARGET MEASUREMENT
ERROR, THE STANDARD DEVIATION OF
THE TARGET MEASUREMENT ERROR, THE
MEAN OF THE ERROR OF THE OWNERSHIP
VELOCITY CONTRIBUTION TO BEARING
ANGLE RATE, AND THE STANDARD
DEVIATION OF THE ERROR OF THE
OWNERSHIP CONTRIBUTION TO BEARING
ANGLE RATE. THE MEAN SHALL

J12.7E1

APPENDIX B

DFI NAME
353 UNCERTAINTY INDEX

DUI NAME
012 (CONTINUED)

EXPLANATION

APPLICABILITY

REFLECT ALL KNOWN BIASES SUCH AS SENSOR BORESIGHTING ERRORS. THE STANDARD DEVIATION SHALL REFLECT ERRORS DUE TO MEASUREMENT NOISE. THE STANDARD DEVIATION DESCRIBES A 2 SIGMA REGION AROUND THE MEAN (-SIGMA TO SIGMA).

013 ELEVATION ANGLE RATE
UNCERTAINTY
[5 BIT] (EAR UNCERT)

PROVIDES AN ESTIMATE OF TARGET ELEVATION ANGLE RATE UNCERTAINTY. THE UNCERTAINTY SHALL BE CALCULATED AS THE ROOT-SUM-SQUARE OF THE MEAN OF THE TARGET MEASUREMENT ERROR, THE STANDARD DEVIATION OF THE TARGET MEASUREMENT ERROR, THE MEAN OF THE ERROR OF THE OWNERSHIP VELOCITY CONTRIBUTION TO ELEVATION ANGLE RATE, AND THE STANDARD DEVIATION OF THE ERROR OF THE OWNERSHIP VELOCITY CONTRIBUTION TO ELEVATION ANGLE RATE. THE MEAN SHALL REFLECT ALL KNOWN BIASES SUCH AS SENSOR BORESIGHTING ERRORS. THE STANDARD DEVIATION SHALL REFLECT ERRORS DUE TO MEASUREMENT NOISE. THE STANDARD DEVIATION DESCRIBES A 2 SIGMA REGION AROUND THE MEAN (-SIGMA TO SIGMA).

J12.7E1

014 RANGE UNCERTAINTY
[4 BIT]

PROVIDES AN ESTIMATE OF TARGET POSITION UNCERTAINTY ALONG THE MEASUREMENT AXIS DEFINED ALONG THE LINE BETWEEN THE OBSERVER POSITION AND THE TARGET POSITION. THE UNCERTAINTY SHALL BE CALCULATED AS THE ROOT-SUM-SQUARE OF THE MEAN OF TARGET MEASUREMENT ERROR, THE STANDARD DEVIATION OF THE TARGET MEASUREMENT ERROR, THE

J12.7C1

APPENDIX B

DFI NAME
353 UNCERTAINTY INDEX

DUI NAME	EXPLANATION	APPLICABILITY
014 (CONTINUED)	MEAN OF THE OBSERVER POSITION ERROR, AND THE STANDARD DEVIATION OF THE OBSERVER POSITION ERROR ALONG THIS AXIS. THE MEAN SHALL REFLECT ALL KNOWN BIASES SUCH AS SENSOR BORESIGHTING ERRORS. THE STANDARD DEVIATION SHALL REFLECT ERRORS DUE TO MEASUREMENT NOISE. THE STANDARD DEVIATION DESCRIBES A 2 SIGMA REGION AROUND THE MEAN (-SIGMA TO SIGMA). THE MEASUREMENT AXES ALONG WHICH SLANT RANGE POSITION UNCERTAINTY, CROSS RANGE POSITION UNCERTAINTY AND VERTICAL POSITION UNCERTAINTY ARE DEFINED ARE MUTUALLY ORTHOGONAL.	
015 RANGE RATE UNCERTAINTY [5 BIT]	PROVIDES AN ESTIMATE OF THE TARGET RANGE RATE UNCERTAINTY ALONG THE MEASUREMENT AXIS. THE UNCERTAINTY SHALL BE CALCULATED AS THE ROOT-SUM-SQUARE OF THE MEAN OF TARGET MEASUREMENT ERROR, THE MEAN OF THE OBSERVER'S OWN VELOCITY COMPONENT ERROR, AND THE STANDARD DEVIATION OF THE OBSERVER'S OWN VELOCITY COMPONENT ERROR ALONG THIS AXIS. THE STANDARD DEVIATION SHALL REFLECT ERRORS DUE TO MEASUREMENT NOISE. THE STANDARD DEVIATION DESCRIBES A 2 SIGMA REGION AROUND THE MEAN (-SIGMA TO SIGMA).	J12.7C1

DFI NAME
353 UNCERTAINTY INDEX

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001-003 AND 014 -----		
NO STATEMENT	0	
GREATER THAN 25000 FT	1	
GREATER THAN 15712 THROUGH 25000 FT	2	
GREATER THAN 9882 THROUGH 15712 FT	3	
GREATER THAN 6214 THROUGH 9882 FT	4	
GREATER THAN 3907 THROUGH 6214 FT	5	
GREATER THAN 2456 THROUGH 3907 FT	6	
GREATER THAN 1544 THROUGH 2456 FT	7	
GREATER THAN 971 THROUGH 1544 FT	8	
GREATER THAN 611 THROUGH 971 FT	9	
GREATER THAN 384 THROUGH 611 FT	10	
GREATER THAN 241 THROUGH 384 FT	11	
GREATER THAN 152 THROUGH 241 FT	12	
GREATER THAN 95 THROUGH 152 FT	13	
GREATER THAN 60 THROUGH 95 FT	14	
LESS THAN OR EQUAL TO 60 FT	15	
----- FOR DUIS 004 AND 005 -----		
0 DEGREES THROUGH 89.9121 DEGREES	0 THROUGH 1023	IN 0.08789 DEGREE INCREMENTS.
NO STATEMENT	1024	

B-226

MIL-STD-6016B
APPENDIX B

DFI NAME
353 UNCERTAINTY INDEX

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
-89.9121 DEGREES THROUGH -0.08789 DEGREES	1025 THROUGH 2047	IN 0.08789 DEGREE INCREMENTS.
----- FOR DUIS 007-009 -----		
NO STATEMENT	0	
GREATER THAN 250.00 FT/SEC	1	
GREATER THAN 163.5 FT/SEC THROUGH 250 FT/SEC	2	
GREATER THAN 106.9 FT/SEC THROUGH 163.5 FT/SEC	3	
GREATER THAN 69.9 FT/SEC THROUGH 106.9 FT/SEC	4	
GREATER THAN 45.7 FT/SEC THROUGH 69.9 FT/SEC	5	
GREATER THAN 29.9 FT/SEC THROUGH 45.7 FT/SEC	6	
GREATER THAN 19.5 FT/SEC THROUGH 29.9 FT/SEC	7	
GREATER THAN 12.8 FT/SEC THROUGH 19.5 FT/SEC	8	
GREATER THAN 8.4 FT/SEC THROUGH 12.8 FT/SEC	9	
GREATER THAN 5.5 FT/SEC THROUGH 8.4 FT/SEC	10	
GREATER THAN 3.6 FT/SEC THROUGH 5.5 FT/SEC	11	
GREATER THAN 2.3 FT/SEC THROUGH 3.6 FT/SEC	12	
GREATER THAN 1.5 FT/SEC THROUGH 2.3 FT/SEC	13	
GREATER THAN 1 FT/SEC THROUGH 1.5 FT/SEC	14	
LESS THAN OR EQUAL TO 1 FT/SEC	15	

B-227

MIL-STD-6016B
APPENDIX B

DFI NAME
353 UNCERTAINTY INDEX

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
----- FOR DUIS 010 AND 011 -----		
NO STATEMENT (NOT VALID)	0	
GREATER THAN 5.00 DEGREES	1	
GREATER THAN 3.70 DEGREES THROUGH 5.00 DEGREES	2	
GREATER THAN 2.74 DEGREES THROUGH 3.70 DEGREES	3	
GREATER THAN 2.03 DEGREES THROUGH 2.74 DEGREES	4	
GREATER THAN 1.50 DEGREES THROUGH 2.03 DEGREES	5	
GREATER THAN 1.11 DEGREES THROUGH 1.50 DEGREES	6	
GREATER THAN .82 DEGREES THROUGH 1.11 DEGREES	7	
GREATER THAN .61 DEGREES THROUGH .82 DEGREES	8	
GREATER THAN .45 DEGREES THROUGH .61 DEGREES	9	
GREATER THAN .33 DEGREES THROUGH .45 DEGREES	10	
GREATER THAN .25 DEGREES THROUGH .33 DEGREES	11	
GREATER THAN .18 DEGREES THROUGH .25 DEGREES	12	
GREATER THAN .14 DEGREES THROUGH .18 DEGREES	13	
GREATER THAN .10 DEGREES THROUGH .14 DEGREES	14	
LESS THAN OR EQUAL TO .10 DEGREES	15	

B - 228

DFI NAME
353 UNCERTAINTY INDEX

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
----- FOR DUIS 012 AND 013 -----		
NO STATEMENT	0	
GREATER THAN 4.6283 DEG/SEC	1	
GREATER THAN 3.7026 DEG/SEC THROUGH 4.6283 DEG/SEC	2	
GREATER THAN 2.9621 DEG/SEC THROUGH 3.7026 DEG/SEC	3	
GREATER THAN 2.3697 DEG/SEC THROUGH 2.9621 DEG/SEC	4	
GREATER THAN 1.8958 DEG/SEC THROUGH 2.3697 DEG/SEC	5	
GREATER THAN 1.5166 DEG/SEC THROUGH 1.8958 DEG/SEC	6	
GREATER THAN 1.2133 DEG/SEC THROUGH 1.5166 DEG/SEC	7	
GREATER THAN .9706 DEG/SEC THROUGH 1.2133 DEG/SEC	8	
GREATER THAN .7765 DEG/SEC THROUGH .9706 DEG/SEC	9	
GREATER THAN .6212 DEG/SEC THROUGH .7765 DEG/SEC	10	
GREATER THAN .4970 DEG/SEC THROUGH .6212 DEG/SEC	11	
GREATER THAN .3976 DEG/SEC THROUGH .4970 DEG/SEC	12	
GREATER THAN .3181 DEG/SEC THROUGH .3976 DEG/SEC	13	

B - 229

MIL-STD-6016B
APPENDIX B

DFI NAME
353 UNCERTAINTY INDEX

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
GREATER THAN .2544	14	
DEG/SEC THROUGH .3181		
DEG/SEC		
GREATER THAN .2036	15	
DEG/SEC THROUGH .2544		
DEG/SEC		
GREATER THAN .1628	16	
DEG/SEC THROUGH .2036		
DEG/SEC		
GREATER THAN .1303	17	
DEG/SEC THROUGH .1628		
DEG/SEC		
GREATER THAN .1042	18	
DEG/SEC THROUGH .1303		
DEG/SEC		
GREATER THAN .0834	19	
DEG/SEC THROUGH .1042		
DEG/SEC		
GREATER THAN .0667	20	
DEG/SEC THROUGH .0834		
DEG/SEC		
GREATER THAN .0534	21	
DEG/SEC THROUGH .0667		
DEG/SEC		
GREATER THAN .0427	22	
DEG/SEC THROUGH .0534		
DEG/SEC		
GREATER THAN .0342	23	
DEG/SEC THROUGH .0427		
DEG/SEC		
GREATER THAN .0273	24	
DEG/SEC THROUGH .0342		
DEG/SEC		
GREATER THAN .0219	25	
DEG/SEC THROUGH .0273		
DEG/SEC		
GREATER THAN .0175	26	
DEG/SEC THROUGH .0219		
DEG/SEC		

DFI NAME
353 UNCERTAINTY INDEX

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
GREATER THAN .0140 DEG/SEC THROUGH .0175 DEG/SEC	27	
GREATER THAN .0112 DEG/SEC THROUGH .0140 DEG/SEC	28	
GREATER THAN .0090 DEG/SEC THROUGH .0112 DEG/SEC	29	
GREATER THAN .0072 DEG/SEC THROUGH .0090 DEG/SEC	30	
LESS THAN OR EQUAL TO .0072 DEG/SEC	31	
----- FOR DUI 015 -----		
NO STATEMENT	0	
GREATER THAN 660 FT/SEC	1	
GREATER THAN 527.62 FT/SEC THROUGH 660 FT/SEC	2	
GREATER THAN 421.79 FT/SEC THROUGH 527.62 FT/SEC	3	
GREATER THAN 337.18 FT/SEC THROUGH 421.79 FT/SEC	4	
GREATER THAN 269.55 FT/SEC THROUGH 337.18 FT/SEC	5	
GREATER THAN 215.48 FT/SEC THROUGH 269.55 FT/SEC	6	
GREATER THAN 172.26 FT/SEC THROUGH 215.48 FT/SEC	7	
GREATER THAN 137.21 FT/SEC THROUGH 172.26 FT/SEC	8	

APPENDIX B

DFI NAME
353 UNCERTAINTY INDEX

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
GREATER THAN 110.09 FT/SEC THROUGH 137.21 FT/SEC	9	
GREATER THAN 88.01 FT/SEC THROUGH 110.09 FT/SEC	10	
GREATER THAN 70.35 FT/SEC THROUGH 88.01 FT/SEC	11	
GREATER THAN 56.24 FT/SEC THROUGH 70.35 FT/SEC	12	
GREATER THAN 44.96 FT/SEC THROUGH 56.24 FT/SEC	13	
GREATER THAN 35.94 FT/SEC THROUGH 44.96 FT/SEC	14	
GREATER THAN 28.73 FT/SEC THROUGH 35.94 FT/SEC	15	
GREATER THAN 22.97 FT/SEC THROUGH 28.73 FT/SEC	16	
GREATER THAN 18.36 FT/SEC THROUGH 22.97 FT/SEC	17	
GREATER THAN 14.68 FT/SEC THROUGH 18.36 FT/SEC	18	
GREATER THAN 11.73 FT/SEC THROUGH 14.68 FT/SEC	19	
GREATER THAN 9.38 FT/SEC THROUGH 11.73 FT/SEC	20	
GREATER THAN 7.5 FT/SEC THROUGH 9.38 FT/SEC	21	
GREATER THAN 6.0 FT/SEC THROUGH 7.5 FT/SEC	22	
GREATER THAN 4.79 FT/SEC THROUGH 6.0 FT/SEC	23	

DFI NAME
353 UNCERTAINTY INDEX

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
GREATER THAN 3.83 FT/SEC THROUGH 4.79 FT/SEC	24	
GREATER THAN 3.06 FT/SEC THROUGH 3.83 FT/SEC	25	
GREATER THAN 2.45 FT/SEC THROUGH 3.06 FT/SEC	26	
GREATER THAN 1.96 FT/SEC THROUGH 2.45 FT/SEC	27	
GREATER THAN 1.56 FT/SEC THROUGH 1.96 FT/SEC	28	
GREATER THAN 1.25 FT/SEC THROUGH 1.56 FT/SEC	29	
GREATER THAN 1 FT/SEC THROUGH 1.25 FT/SEC	30	
LESS THAN OR EQUAL TO 1 FT/SEC	31	

DFI NAME DEFINITION
354 FORCE TELL INDICATOR THIS INDICATOR CAUSES TRACK/POINT DATA TO BE FORCED THROUGH
CONTROLLABLE RECEIVE FILTERS.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
002 FORCE TELL INDICATOR [1 BIT] (FT IND)	THIS INDICATOR CAUSES TRACK/POINT DATA TO BE FORCED THROUGH CONTROLLABLE RECEIVE FILTERS.	J2.0I	J2.2I	J2.3I
		J2.4I	J2.5I	J2.6I
		J3.0I	J3.2I	J3.3I
		J3.4I	J3.5I	J3.6I
		J3.7I	J5.4I	

DATA ITEM	BIT CODE	EXPLANATION
-----------	----------	-------------

----- FOR DUI 002 -----

NO STATEMENT	0
FORCE TELL STATUS	1

DFI	NAME	DEFINITION			
355	EMERGENCY INDICATOR	INDICATES WHETHER OR NOT A UNIT OR TRACK HAS AN EMERGENCY.			
	DATA STANDARD USAGE: Link 16	STATUS:			
	DUI NAME	EXPLANATION	APPLICABILITY		
	002 EMERGENCY INDICATOR	USED TO INDICATE WHETHER OR NOT A	J2.0I	J2.2I	J2.3I
	[1 BIT] (EMG IND)	UNIT OR TRACK HAS AN EMERGENCY.	J2.4I	J2.5I	J2.6I
			J3.2I	J3.3I	J3.4I
			J3.5I	J3.7I	J5.4I
	DATA ITEM	BIT CODE	EXPLANATION		
	----- FOR DUI 002 -----				
	NO STATEMENT	0			
	EMERGENCY STATUS	1			

DFI NAME DEFINITION
356 HOLDING CONTACT EXPRESSES THE PRESENCE OF AN ACOUSTIC DETECTION BY A SONOBUOY
OR PATTERN OF SONOBUOYS.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 HOLDING CONTACT [1 BIT] (HLD CON)	EXPRESSES THE PRESENCE OF AN ACOUSTIC DETECTION BY A SONOBUOY OR PATTERN OF SONOBUOYS. INTERPRETED ONLY WHEN ASW POINT AMPLIFY IN THIS MESSAGE IS 9 (SONOBUOY) OR 10 (PATTERN).	J3.0C3

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
SONOBUOY/PATTERN	1	
HOLDING CONTACT		

DFI NAME DEFINITION
357 DATA REPORT TYPE EXPRESSES THE TYPE OF SUBSURFACE TRACK BEING REPORTED.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 DATA REPORT TYPE [3 BIT]	EXPRESSES THE TYPE OF SUBSURFACE TRACK BEING REPORTED.	J3.4I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
SUBSURFACE TRACK	0	
SURFACED SUBMARINE	1	
SNORKELING SUBMARINE	2	
DISUSED	3	
DATUM	4	
UNDEFINED	5 THROUGH 7	

APPENDIX B

DFI NAME DEFINITION
358 CONFIDENCE LEVEL

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY	
001 CONFIDENCE LEVEL [5 BIT]	EXPRESSES AN ASSESSMENT AS TO WHETHER CONTACTS ARE OF SUBMARINE ORIGIN WITH ADDED ASSESSMENT OF THE CONFIDENCE LEVEL.	J3.4I	J5.4I
002 AMPLIFICATION CONFIDENCE [3 BIT] (AMP CONF)	A MEASURE OF THE CONFIDENCE IN THE VALIDITY OR CERTAINTY OF THE AMPLIFICATION INFORMATION PROVIDED IN THE AMPLIFICATION FIELD OF THE MESSAGE. LARGER VALUES REPRESENT A GREATER CONFIDENCE LEVEL.	J3.0C5	J3.6E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
UNCLASSIFIED	1	
POSSIBLE SUBMARINE	2	
LOW ONE		
POSSIBLE SUBMARINE	3	
LOW TWO		
POSSIBLE SUBMARINE	4	
HIGH THREE		
POSSIBLE SUBMARINE	5	
HIGH FOUR		
PROBABLE SUBMARINE	6	
CERTAIN SUBMARINE	7	
NON SUBMARINE	8	
SURFACE VESSEL	9	
UNDEFINED	10 THROUGH 31	
----- FOR DUI 002 -----		
NO STATEMENT	0	
0-THROUGH 33%	1	
34- THROUGH 66%	2	
67- THROUGH 90%	3	
91- THROUGH 97%	4	

DFI	NAME		
358	CONFIDENCE LEVEL		
	DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
	GREATER THAN OR EQUAL TO	5	
	98%		
	UNDEFINED	6 THROUGH 7	

DFI NAME DEFINITION
359 SENSOR EXPRESSES TYPE OF SENSOR DETECTING CONTACT.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 SENSOR [5 BIT]	EXPRESSES TYPE OF SENSOR DETECTING CONTACT.	J3.4C1
002 SENSOR INDICATOR [3 BIT]	EXPRESSES TYPE OF SENSOR DETECTING CONTACT.	J5.4C1
003 SENSOR TYPE INDICATOR [3 BIT]	SELECTS DATA APPLICABILITY IN SENSOR STATUS/COMMAND, CHANNEL CODE, AND CHANNEL SET FIELDS.	J12.6C6
004 SENSOR STATUS/COMMAND INDICATOR [1 BIT] (SS/COM IND)	INDICATES VALUES SET IN OTHER FIELDS ARE COMMANDS.	J12.6C6
005 SENSOR CHANNEL/CODE [12 BIT]	PROVIDES THE SENDER'S CURRENT RADAR CHANNEL, LASER CODE OF ILLUMINATOR OR TRACKER.	J12.6C6
006 SENSOR CHANNEL SET [5 BIT]	PROVIDES THE CHANNEL SET IN A SENDER'S RADAR.	J12.6C6

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT/UNKNOWN	0	
ACTIVE SONAR	1	
PASSIVE SONAR	2	
PASSIVE SONOBUOY	3	
ACTIVE SONOBUOY	4	
MAD	5	
VISUAL	6	
RADAR	7	
ES	8	
TAS/TAC TAS	9	
IRDS	10	
LOFAR	11	
DIFAR	12	
DIRECT PATH	13	

APPENDIX B

DFI NAME
359 SENSOR

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
BOTTOM BOUNCE	14	
CONVERGENCE ZONE 1	15	
CONVERGENCE ZONE 2	16	
CONVERGENCE ZONE 3	17	
LLTV	18	
UNDERWATER TELEPHONE	19	
INTELLIGENCE	20	
DESIGNATED FIX	21	
PASSIVE SOURCE (CPA)	22	
PASSIVE DIRECTIONAL SONOBUOY	23	
DICASS	24	
SOSUS	25	
FLIR	26	
SHIP SONAR	27	
UNDEFINED	28 THROUGH 31	
----- FOR DUI 002 -----		
NO STATEMENT	0	
ACTIVE SONAR	1	
PASSIVE SONAR	2	
PASSIVE SONOBUOY	3	
ACTIVE SONOBUOY	4	
MAD	5	
VISUAL/ELECTRO-OPTICS (IRDS)	6	
RADAR	7	
----- FOR DUI 003 -----		
NO STATEMENT	0	
RADAR CHANNEL	1	THE SENSOR DATA IN THE SENSOR STATUS/COMMAND, CHANNEL/CODE, AND CHANNEL SET FIELDS REPRESENTS RADAR DATA.
LASER ILLUMINATOR CODE	2	THE SENSOR DATA IN THE SENSOR STATUS/COMMAND, CHANNEL/CODE, AND CHANNEL SET FIELDS REPRESENTS LASER ILLUMINATOR DATA.
LASER TRACKER CODE	3	THE SENSOR DATA IN THE SENSOR

DFI NAME
359 SENSOR

DATA ITEM (CONTINUED) (CONTINUED)	BIT CODE	EXPLANATION STATUS/COMMAND, CHANNEL/CODE, AND CHANNEL SET FIELDS REPRESENTS LASER TRACKER DATA.
UNDEFINED	4 THROUGH 7	
----- FOR DUI 004 -----		
SENSOR STATUS	0	DATA IN THE SENSOR CHANNEL/CODE AND CHANNEL SET, FREQUENCY AGILITY INDICATOR, PDI INDICATOR, PDI/ MISSILE DATA LINK CHANNEL, A/G WEAPON DATA LINK CHANNEL, AND RADAR PRF FIELDS REPRESENT THE SENDER'S CURRENT STATUS.
SENSOR COMMAND	1	DATA IN THE SENSOR CHANNEL/CODE AND CHANNEL SET, FREQUENCY AGILITY INDICATOR, PDI INDICATOR, PDI/ MISSILE DATA LINK CHANNEL, A/G WEAPON DATA LINK CHANNEL, AND RADAR PRF FIELDS REPRESENT THE COMMANDED VALUES FROM THE SENDER.
----- FOR DUI 005 -----		
----- FOR SENSOR TYPE INDICATOR = 0 -----		
NO STATEMENT ILLEGAL	0 1 THROUGH 4095	
----- FOR SENSOR TYPE INDICATOR = 1 -----		
NO STATEMENT CHANNEL 1 THROUGH 511	0 1 THROUGH 511	CURRENT RADAR CHANNEL OF THE SENDER IF THE SENSOR STATUS/COMMAND INDICATOR IS SET TO VALUE 0. IF

DFI NAME
359 SENSOR

DATA ITEM (CONTINUED)

FOR SENSOR TYPE
INDICATOR = 1

(CONTINUED)

UNDEFINED

FOR SENSOR TYPE
INDICATOR = 2

NO STATEMENT
ILLEGAL
LASER CODE

ILLEGAL
LASER CODE

ILLEGAL

FOR SENSOR TYPE
INDICATOR = 3

NO STATEMENT
ILLEGAL
LASER CODE

ILLEGAL
LASER CODE

ILLEGAL

BIT CODE
(CONTINUED)

512 THROUGH 4095

0
1 THROUGH 1110
1111 THROUGH 1788

1789 THROUGH 2110
2111 THROUGH 2888

2889 THROUGH 4095

0
1 THROUGH 1110
1111 THROUGH 1788

1789 THROUGH 2110
2111 THROUGH 2888

2889 THROUGH 4095

EXPLANATION

THE SENSOR STATUS/COMMAND
INDICATOR IS SET TO VALUE 1, THIS
IS THE COMMANDED RADAR CHANNEL
FROM THE SENDER.

THE SENDER'S LASER TRACKER CODE. 0'S
AND 9'S ARE NOT ALLOWED.

THE SENDER'S LASER TRACKER CODE. 0'S
AND 9'S ARE NOT ALLOWED.

THE SENDER'S LASER TRACKER CODE. 0'S
AND 9'S ARE NOT ALLOWED.

THE SENDER'S LASER TRACKER CODE. 0'
AND 9'S ARE NOT ALLOWED.

DFI NAME
359 SENSOR

DATA ITEM (CONTINUED)
----- FOR DUI 006 -----

NO STATEMENT
CHANNEL SET 1 THROUGH 31

BIT CODE

0
1 THROUGH 31

EXPLANATION

CURRENT RADAR CHANNEL SET OF THE
SENDER IF THE SENSOR TYPE
INDICATOR IS SET TO 1 AND THE
SENSOR STATUS/COMMAND INDICATOR IS
SET TO 0. IF THE SENSOR STATUS/
COMMAND INDICATOR IS SET TO 1,
THEN THIS IS THE COMMANDED CHANNEL
SET FROM THE SENDER.

DFI NAME DEFINITION
360 BEARING DRIFT INDICATES THE DIRECTION OF CHANGE (DRIFT) OF THE RESOLVED BEARING.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 BEARING DRIFT [2 BIT]	INDICATES THE DIRECTION OF CHANGE (DRIFT) OF THE RESOLVED BEARING.	J5.4I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
LEFT	1	
RIGHT	2	
STEADY	3	

DFI NAME DEFINITION
361 AUDIO EXPRESSES THE PRESENCE OF AN AUDIBLE FREQUENCY.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 AUDIO [1 BIT] (AUD)	EXPRESSES THE PRESENCE OF AN AUDIBLE FREQUENCY.	J5.4I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
AUDIO	1	

DFI NAME
362 EW PARAMETER INDICATOR

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
015 PRF/PRI INDICATOR [1 BIT] (PRI IND)	INDICATES WHETHER PRF OR PRI IS BEING REPORTED.	J14.0C4 J14.2C8
016 ANTENNA SCAN RATE/PERIOD INDICATOR [2 BIT] (ASP IND)	INDICATES WHETHER ANTENNA SCAN RATE (PRIMARY OR SECONDARY) OR ANTENNA SCAN PERIOD IS BEING REPORTED.	J14.0C4

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 015 -----		
PRF BEING REPORTED	0	
PRI BEING REPORTED	1	
----- FOR DUI 016 -----		
NO STATEMENT	0	
PRIMARY ANTENNA SCAN RATE BEING REPORTED	1	
ANTENNA SCAN PERIOD BEING REPORTED	2	
SECONDARY ANTENNA SCAN RATE BEING REPORTED	3	

DFI NAME DEFINITION
363 POINT TYPE THE TYPE OF POINT BEING REPORTED.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
003 POINT TYPE [4 BIT]	EXPRESSES THE NATURE, KIND, OR CHARACTER OF A POINT.	J3.0I
004 POINT TYPE, 1 [4 BIT]	EXPRESSES THE NATURE, KIND, OR CHARACTER OF A POINT.	J12.0C3

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 003 -----		
HAZARD	0	
REFERENCE POINT (GENERAL)	1	
STATION (GENERAL)	2	
STATION (AIR)	3	
LINE	4	
AREA (GENERAL)	5	
AREA (HAZARD)	6	
ASW	7	
ASW, 1	8	
UNDEFINED	9 THROUGH 15	

----- FOR DUI 004 -----

NO STATEMENT	0	
TARGET	1	A POINT THAT INDICATES THE LOCATION OF THE TARGET.
CLOSEST FRIENDLY	2	A POINT THAT INDICATES THE LOCATION OF THE CLOSEST FRIENDLY FORCES TO THE OBJECTIVE.
INITIAL POINT	3	A POINT IN SPACE THAT AIRCRAFT RENDEZVOUS OR PASS THROUGH PRIOR TO ATTACKING A TARGET.
BEACON	4	THE GEOGRAPHIC POSITION OF A BEACON USED AS A REFERENCE POINT FOR BOMBING MISSIONS.
CONTACT POINT	5	THE POSITION AT WHICH AN AIRCRAFT MAKES RADIO CONTACT WITH AN AIR CONTROL AGENCY.

DFI NAME
363 POINT TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
LASER DESIGNATOR	6	THE PRECISE LOCATION OF THE LASER DESIGNATOR.
MARKER	7	THE POSITION AT WHICH SMOKE, FLARES, TRACERS, PANELS, WHITE PHOSPHORUS MUNITIONS, OR ILLUMINATION ARE BEING UTILIZED AS A MARKER. THE TYPE OF MARKER BEING USED MAY BE PROVIDED BY VOICE.
POINT	8	THE LOCATION OF A GENERAL POINT THAT WAS NOT REPORTED IN A J3.0 MESSAGE.
CENTER POINT	9	THE LOCATION OF A POINT THAT INDICATES THE CENTER OF AN AREA REPORTED IN A J3.0 MESSAGE.
INITIAL ROUTE POINT	10	THE LOCATION OF A POINT THAT INDICATES THE STARTING POINT OF A ROUTE.
TARGET DEFENSES	11	THE POSITION AT WHICH THE TARGET DEFENSES ARE LOCATION.
ENGAGEMENT POINT	12	THE ACTUAL OR EXPECTED POINT THAT ORDNANCE IS BEING OR WILL BE DELIVERED AGAINST A GROUND TARGET.
UNDEFINED	13 THROUGH 14	
ORIGIN OF BEARING	15	THE POSITION OF THE ORIGIN OF A LINE OF BEARING TARGET.

DFI NAME DEFINITION
364 ALTITUDE DATA SOURCE IDENTIFIES THE SOURCE OF THE ALTITUDE DATA.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 ALTITUDE SOURCE [2 BIT] (ALT SRC)	IDENTIFIES THE SOURCE OF THE ALTI- TUDE DATA IN A MESSAGE.	J3.2I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT/ESTIMATED	0	IF ALTITUDE IS UNKNOWN, THE ALTITUDE SOURCE IS UNKNOWN. IF ALTITUDE HAS A VALUE, THEN ALTITUDE SOURCE IS ESTIMATED.
SENSOR	1	THE REPORTED ALTITUDE IS SENSOR MEASURED.
MANUAL AIRCRAFT REPORT	2	OPERATOR HAS MANUALLY ENTERED AN ALTITUDE BASED ON AIRCREW VOICE REPORT OR MODE C IFF/LINK 4A REPORT FROM THE AIRCRAFT.
AUTOMATIC AIRCRAFT REPORT	3	ALTITUDE AUTOMATICALLY RECEIVED FROM AIRCRAFT IN REAL TIME VIA MODE C OR LINK 4A AND AUTOMATICALLY TRANSMITTED TO THE INTERFACE.

B-250

MIL-STD-6016B
APPENDIX B

DFI	NAME	DEFINITION
365	ALTITUDE (HEIGHT)	THE ALTITUDE (HEIGHT) OF AN OBJECT AS MEASURED RADially OUTWARD FROM THE EARTH AS A POSITIVE QUANTITY ABOVE MEAN SEA LEVEL (MSL).

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY			
001 ALTITUDE, ANGLE ORIGIN [11 BIT]	EXPRESSES ALTITUDE AS MEASURED OUTWARD FROM THE EARTH AS A POSITIVE QUANTITY ABOVE MEAN SEA LEVEL (MSL) IN FEET.	J12.7E0			
025 CLOUD HEIGHT, 1 [6 BIT]		J13.0C1	J17.0I		
026 CLOUD HEIGHT, 2 [6 BIT]		J13.0C1			
027 CLOUD HEIGHT, 3 [6 BIT]		J13.0C1			
033 ALTITUDE, 25 FT [13 BIT]	EXPRESSES ALTITUDE AS MEASURED OUT- WARD FROM THE EARTH AS A POSITIVE QUANTITY ABOVE MEAN SEA LEVEL (MSL) IN FEET.	J2.0I J3.7C3 J14.0C1	J2.2I J12.1I J15.0C1	J3.2I J12.3E0	
034 ALTITUDE, 100 FT [11 BIT]	EXPRESSES ALTITUDE AS MEASURED OUT- WARD FROM THE EARTH AS A POSITIVE QUANTITY ABOVE MEAN SEA LEVEL (MSL) IN FEET.	J12.0C2	J12.6E0		
035 ALTITUDE, 100 FT 1 [10 BIT]	EXPRESSES ALTITUDE AS MEASURED OUT- WARD FROM THE EARTH AS A POSITIVE QUANTITY ABOVE MEAN SEA LEVEL (MSL) IN FEET.	J3.0E0	J7.6E0		
036 ALTITUDE, 100 FT 2 [10 BIT]	EXPRESSES ALTITUDE AS MEASURED OUT- WARD FROM THE EARTH AS A POSITIVE QUANTITY ABOVE MEAN SEA LEVEL (MSL) IN FEET.	J3.0E0	J7.6E0		
037 RADAR WATCH ALTITUDE [9 BIT]	EXPRESSES THE BEST ALTITUDE FOR RADAR WATCH AS MEASURED OUTWARD FROM THE EARTH AS A POSITIVE	J13.2C3			

DFI NAME
365 ALTITUDE (HEIGHT)

DUI NAME	EXPLANATION	APPLICABILITY
037 (CONTINUED)	QUANTITY ABOVE MEAN SEA LEVEL (MSL) IN FEET.	
DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001 AND 034 -----		
0 THROUGH 204,600 FT NO STATEMENT	0 THROUGH 2046 2047	IN 100 FT INCREMENTS.
----- FOR DUIS 025-027 -----		
NO STATEMENT 100 THROUGH 6000 FEET	0 1 THROUGH 60	HEIGHT OF CLOUD BASE IN 100 FEET INCREMENTS.
OVER 6000 FEET UNDEFINED SKY OBSCURED	61 62 63	
----- FOR DUI 033 -----		
0 THROUGH 204,750 FEET ALTITUDE UNKNOWN	0 THROUGH 8190 8191	IN 25 FEET INCREMENTS.
----- FOR DUI 035 -----		
0 THROUGH 102,200 FEET NO STATEMENT	0 THROUGH 1022 1023	THE BASE/MINIMUM ALTITUDE BOUNDARY OR A DESIGNATED ALTITUDE IN 100 FT. INCREMENTS. ALTITUDE IS NOT BEING REPORTED IN THIS MESSAGE.
----- FOR DUI 036 -----		
0 ALTITUDE 100 THROUGH 102,200 FEET NO STATEMENT	0 1 THROUGH 1022 1023	ILLEGAL. AN UPPER/MAXIMUM ALTITUDE BOUNDARY IN 100 FT. INCREMENTS. AN UPPER/MAXIMUM ALTITUDE IS NOT BEING REPORTED IN THIS MESSAGE.

B-252

MIL-STD-6016B
APPENDIX B

DFI NAME
365 ALTITUDE (HEIGHT)

DATA ITEM (CONTINUED)
----- FOR DUI 037 -----

0 THROUGH 50,900 FEET
GREATER THAN 50,900 FEET
NO STATEMENT

BIT CODE

0 THROUGH 509
510
511

EXPLANATION

IN 100 FOOT INCREMENTS.

DFI NAME DEFINITION
 366 DEPTH USED TO REPORT DEPTH IN METERS OR A PLAIN STATEMENT.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
008 DEPTH, 15 METERS [7 BIT]	EXPRESSES DEPTH AS MEASURED DOWNWARD FROM MEAN SEA LEVEL (MSL) AS A POSITIVE QUANTITY IN METERS.	J2.4I J3.4C1
009 DEPTH CATEGORY [4 BIT]	EXPRESSES DEPTH BY DESCRIPTION OF HORIZONTAL PLANES AT OR BELOW MEAN SEA LEVEL (MSL).	J2.4I
010 DEPTH, ABOVE/BELOW LAYER (SENSOR) [2 BIT] (DPH A/B)	REPORTS WHETHER SENSOR DEPTH IS ABOVE OR BELOW LAYER.	J5.4C2
011 DEPTH, SENSOR [7 BIT]	EXPRESSES DEPTH OF SENSOR IN 15 METER INCREMENTS AS MEASURED DOWNWARD FROM MEAN SEA LEVEL (MSL) AS A POSITIVE QUANTITY IN METERS.	J5.4C2
012 DEPTH INDICATOR (SONOBUOY) [2 BIT] (DEP IND)	EXPRESSES DEPTH OF SONOBUOY TRANSDUCER IN TERMS RELATIVE TO MSL OF SHALLOW, MEDIUM, OR DEEP WHEN DEPTH, TRANSDUCER IS SET TO NO STATEMENT. EXPRESSES A DEPTH MULTIPLIER WHEN DEPTH, TRANSDUCER IS VALUE 1 THRU 9. INTERPRETED ONLY WHEN THE ASW POINT AMPLIFY IN THE J3.0I IS SET TO 9 (SONOBUOY) OR 10 (PATTERN).	J3.0C3
013 DEPTH, TRANSDUCER (SONOBUOY) [4 BIT]	WHEN MULTIPLIED BY DEPTH INDICATOR (SONOBUOY), EXPRESSES DEPTH OF SONOBUOY TRANSDUCER AS MEASURED DOWNWARD FROM MSL AS A POSITIVE QUANTITY IN METERS. INTERPRETED ONLY WHEN DEPTH INDICATOR (SONOBUOY) IS NOT SET TO ZERO.	J3.0C3
014 DEPTH CONTACT [4 BIT]	EXPRESSES DEPTH BY DESCRIPTION OF HORIZONTAL PLANES AT OR BELOW MEAN SEA LEVEL (MSL).	J3.4C1 J5.4C2

DFI NAME
366 DEPTH

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 008 AND 011 -----		
0 THROUGH 1890 METERS NO STATEMENT	0 THROUGH 126 127	IN 15 METER INCREMENTS.
----- FOR DUI 009 -----		
NO STATEMENT	0	
SURFACED	1	
ESTIMATED SHALLOW	2	
PERISCOPE DEPTH	3	
ABOVE FIRST LAYER	4	
BELOW FIRST LAYER	5	
BETWEEN FIRST AND SECOND LAYERS	6	
BETWEEN SECOND AND THIRD LAYERS	7	
BELOW BOTTOM LAYER	8	
ESTIMATED DEEP	9	
BOTTOMED	10	
UNDEFINED	11 THROUGH 14	
UNKNOWN	15	
----- FOR DUI 010 -----		
NO STATEMENT	0	
ABOVE LAYER	1	
BELOW LAYER	2	
UNDEFINED	3	
----- FOR DUI 012 -----		
NO STATEMENT	0	
SHALLOW (DEPTH X 3)	1	
MEDIUM (DEPTH X 30)	2	
DEEP (DEPTH X 300)	3	

DFI NAME
366 DEPTH

DATA ITEM (CONTINUED)
----- FOR DUI 013 -----

NO STATEMENT	0
DEPTH (METERS X DEPTH INDICATOR)	1 THROUGH 9
UNDEFINED	10 THROUGH 15

----- FOR DUI 014 -----

NO STATEMENT	0
ESTIMATED SHALLOW	1
ABOVE LAYER	2
BELOW LAYER	3
ESTIMATED DEEP	4
BOTTOMED	5
UNKNOWN	6
PERISCOPE DEPTH	7
UNDEFINED	8 THROUGH 15

BIT CODE

EXPLANATION

APPENDIX B

DFI NAME DEFINITION
367 SPEED

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
012 WIND SPEED [7 BIT]	EXPRESSES THE SPEED OF THE WIND IN KNOTS.	J13.0C1 J17.0E0
013 WIND GUST INCREMENT [4 BIT]		J13.0C1
018 SPEED [11 BIT]	THE RATE OF CHANGE OF POSITION.	J2.0E0 J2.2E0 J2.3E0 J2.4E0 J2.6E0 J3.0C2 J3.2E0 J3.3E0 J3.5E0 J3.7C3 J7.6C3 J12.0C2 J12.1I J12.6E0 J14.0C1 J15.0C1
023 SPEED, ASW [9 BIT]	THE SPEED OF A SUBSURFACE CONTACT.	J3.4E0
DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 012 -----		
0 THROUGH 125 KNOTS OVER 125 KNOTS NO STATEMENT	0 THROUGH 125 126 127	IN 1 KNOT INCREMENTS.
----- FOR DUI 013 -----		
0 THROUGH 65 KNOTS	0 THROUGH 13	THE VALUE REPORTED IS ADDED TO THE VALUE OF THE WIND SPEED, REPORTED IN DFI/DUI 367 012, TO GIVE THE MAXIMUM MOMENTARY WIND SPEED. IN 5 KNOT INCREMENTS.
GREATER THAN 65 KNOTS NO STATEMENT	14 15	
----- FOR DUI 018 -----		
0 THROUGH 4092 DATA MILES PER HOUR NO STATEMENT	0 THROUGH 2046 2047	EXPRESSES GROUND SPEED IN 2 DATA MILES PER HOUR INCREMENTS.

DFI NAME
367 SPEED

DATA ITEM (CONTINUED)
----- FOR DUI 023 -----

0 THROUGH 255.0 DATA
MILES PER HOUR
NO STATEMENT

BIT CODE

0 THROUGH 510
511

EXPLANATION

EXPRESSES SPEED OF CONTACT IN .5
DATA MILES PER HOUR INCREMENTS.

B-259

STATUS:

APPENDIX B

MIL-STD-6016B

DFI NO 368 PAGE 1 OF 1

DFI NAME
369 PROBABILITY DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 PROBABILITY OF OWN FORCES [9 BIT]	EXPRESSES THE PROBABILITY THAT THE TARGET BELONGS TO OWN FORCES. THE PROBABILITY SHALL REFLECT BOTH THE CONFIDENCE IN THE IDENTIFICATION SOURCES AND THE CONFIDENCE THAT THE IDENTITY INFORMATION IS CORRECTLY CORRELATED TO THIS TARGET. INFORMATION IN THIS FIELD SHALL BE DERIVED ONLY FROM ONBOARD SOURCES AS OPPOSED TO DATA LINK SOURCES. $100 - (\text{PROBABILITY OF OWN FORCES} + \text{PROBABILITY OF ENEMY FORCES}) = \text{PROBABILITY OF NONALIGNED FORCES}$.	J12.6C4 J12.7C2
002 PROBABILITY OF ENEMY FORCES [9 BIT]	EXPRESSES THE PROBABILITY THAT THE TARGET BELONGS TO ENEMY FORCES. THE PROBABILITY SHALL REFLECT BOTH THE CONFIDENCE IN THE IDENTIFICATION SOURCES AND THE CONFIDENCE THAT THE IDENTITY INFORMATION IS CORRECTLY CORRELATED TO THIS TARGET. INFORMATION IN THIS FIELD SHALL BE DERIVED ONLY FROM ONBOARD SOURCES AS OPPOSED TO DATA LINK SOURCES. $100 - (\text{PROBABILITY OF OWN FORCES} + \text{PROBABILITY OF ENEMY FORCES}) = \text{PROBABILITY OF NONALIGNED FORCES}$.	J12.6C4 J12.7C2
003 AMBIGUOUS TYPE 1 PROBABILITY [9 BIT]	EXPRESSES THE PROBABILITY THAT THE SPECIFIC TYPE IS THE ALTERNATIVE SPECIFIC TYPE PROVIDED IN THE AMBIGUOUS TYPE 1 FIELD. THE PROBABILITY SHALL REFLECT BOTH THE CONFIDENCE IN THE TYPE IDENTIFICATION SOURCES AND THE	J12.6C4 J12.7C2

APPENDIX B

DFI NAME
369 PROBABILITY

DUI NAME	EXPLANATION	APPLICABILITY	
003 (CONTINUED)	CONFIDENCE THAT THE TYPE IDENTIFICATION IS CORRECTLY CORRELATED TO THIS TARGET. INFORMATION IN THIS FIELD SHALL BE DERIVED ONLY FROM ONBOARD SOURCES AS OPPOSED TO DATA LINK SOURCES.		
004 AMBIGUOUS TYPE 2 PROBABILITY [9 BIT]	EXPRESSES THE PROBABILITY THAT THE SPECIFIC TYPE IS THE ALTERNATIVE SPECIFIC TYPE PROVIDED IN THE AMBIGUOUS TYPE 2 FIELD. THE PROBABILITY SHALL REFLECT BOTH THE CONFIDENCE IN THE TYPE IDENTIFICATION SOURCES AND THE CONFIDENCE THAT THE TYPE IDENTIFICATION IS CORRECTLY CORRELATED TO THIS TARGET. INFORMATION IN THIS FIELD SHALL BE DERIVED ONLY FROM ONBOARD SOURCES AS OPPOSED TO DATA LINK SOURCES.	J12.6C4	J12.7C2
DATA ITEM	BIT CODE	EXPLANATION	
----- FOR DUIS 001-004 -----			
0 THROUGH 1 NO STATEMENT	0 THROUGH 510 511	IN 0.00196 INCREMENTS.	

DFI NAME DEFINITION
370 DOPPLER EXPRESSES THE DOPPLER EFFECT OF THE ACOUSTIC CONTACT.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 DOPPLER [2 BIT]	EXPRESSES THE DOPPLER EFFECT OF THE ACOUSTIC CONTACT.	J5.4I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
NO DOPPLER	1	
UP DOPPLER	2	
DOWN DOPPLER	3	

APPENDIX B

DFI NAME DEFINITION
 371 HEADING

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
003 WIND DIRECTION [7 BIT]	THE DIRECTION FROM WHICH THE WIND IS BLOWING IN RELATION TO TRUE NORTH.	J13.0C1	J17.0E0	
009 EGRESS HEADING [9 BIT]	RECOMMENDED DEPARTURE HEADING FROM THE TARGET.	J12.0C4		
010 RUN IN HEADING [9 BIT]	SPECIFIES THE INITIAL POINT (IP) TO TARGET HEADING.	J12.0C4		
015 COURSE [9 BIT]	INDICATES THE DIRECTION OF TRAVEL OF AN OBJECT IN DEGREES WITH RESPECT TO TRUE NORTH.	J2.0E0 J2.4E0 J3.2E0 J3.5E0 J12.0C2 J14.0C1	J2.2E0 J2.6E0 J3.3E0 J3.7C3 J12.1I J15.0C1	J2.3E0 J3.0C2 J3.4E0 J7.6C3 J12.6E0
016 DESIGNATED FLYING COURSE [9 BIT]	OPTIMUM FLYING COURSE FOR LAUNCH/ RECOVERY OF AIRCRAFT.	J13.0E0		

DATA ITEM	BIT CODE	EXPLANATION
-----------	----------	-------------

----- FOR DUI 003 -----

NO STATEMENT	0	
005 THROUGH 360 DEGREES	1 THROUGH 72	IN 5 DEGREE INCREMENTS.
VARIABLE	73	
ILLEGAL	74 THROUGH 127	

----- FOR DUIS 009, 010, 015, AND 016 -----

0 THROUGH 359 DEGREES	0 THROUGH 359	IN 1 DEGREE INCREMENTS.
ILLEGAL	360 THROUGH 510	
NO STATEMENT	511	

DFI NAME DEFINITION
 372 BEARING EXPRESSES THE ANGULAR DISPLACEMENT FROM NORTH FROM ONE OBJECT TO ANOTHER.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 BEARING, INTERCEPT [16 BIT]	AZIMUTHAL BEARING TO THE THREAT REFERENCED TO TRUE NORTH. THE ORIGIN OF THE BEARING IS SPECIFIED BY THE LATITUDE AND LONGITUDE FIELDS IN THE J12.7I.	J12.7E0
007 BEARING [12 BIT]	BEARING IS REFERENCED TO TRUE NORTH.	J3.7C1 J14.0C1 J14.2C1
018 TARGET BEARING [16 BIT]	TARGET BEARING REFERENCED IS TO TRUE NORTH.	J12.0C5
019 BEARING, 1 [9 BIT]	BEARING IS REFERENCED TO TRUE NORTH. THIS FIELD LOCATES THE BEGINNING BEARING OF A GEOGRAPHIC AREA BEING FILTERED.	J7.6C1
020 BEARING, 2 [9 BIT]	BEARING IS REFERENCED TO TRUE NORTH. THIS FIELD LOCATES THE END BEARING OF A GEOGRAPHIC AREA BEING FILTERED.	J7.6C1
021 BEARING 1, ASW [8 BIT]	BEARING IS FROM THE ORIGIN OF THE SENSOR TO THE CONTACT REFERENCED TO TRUE NORTH IN APPROXIMATELY 1.4 DEGREE INCREMENTS. THIS FIELD IS INTERPRETED AS FOLLOWS: A. WHEN THE J5.4 MESSAGE REPORTS AN ACTIVE BEARING (BRT=0) OR A RESOLVED PASSIVE BEARING (BRT=2), THE ASW BEARING 1 FIELD REPORTS THE SINGLE BEARING THAT IS THE SUBJECT OF THE MESSAGE. ASW BEARING 2 WILL NOT BE USED FOR THESE BEARING TYPES. B. WHEN THE J5.4 MESSAGE REPORTS AMBIGUOUS PASSIVE BEARINGS (BRT=1), THE ASW BEARING 1 AND ASW	J5.4E0

DFI NAME
372 BEARING

DUI NAME	EXPLANATION	APPLICABILITY
021 (CONTINUED)	BEARING 2 FIELDS EACH REPORT A BEARING SIMULTANEOUSLY. C. WHEN THE J5.4 BEARING REPORT TYPE IS SET TO NO STATEMENT (BRT=3), THE ASW BEARING 1 WILL NOT BE INTERPRETED.	
022 BEARING 2, ASW [8 BIT]	BEARING IS FROM THE ORIGIN OF THE SENSOR TO THE CONTACT REFERENCED TO TRUE NORTH IN APPROXIMATELY 1.4 DEGREE INCREMENTS. THIS FIELD IS INTERPRETED AS FOLLOWS: A. WHEN THE J5.4 MESSAGE REPORTS AN ACTIVE BEARING (BRT=0) OR A RESOLVED PASSIVE BEARING (BRT=2), THE ASW BEARING 1 FIELD REPORTS THE SINGLE BEARING THAT IS THE SUBJECT OF THE MESSAGE. ASW BEARING 2 WILL NOT BE USED FOR THESE BEARING TYPES. B. WHEN THE J5.4 MESSAGE REPORTS AMBIGUOUS PASSIVE BEARING (BRT=1), THE ASW BEARING 1 AND ASW BEARING 2 FIELDS EACH REPORT A BEARING SIMULTANEOUSLY. C. WHEN THE J5.4 BEARING REPORT TYPE IS SET TO NO STATEMENT (BRT=3), THE ASW BEARING 2 WILL NOT BE INTERPRETED.	J5.4C1
023 BEARING, ASW PLOT [9 BIT]	BEARING, ASW PLOT IS REFERENCED TO TRUE NORTH AND IS INTERPRETED AS FOLLOWS: A. FOR ASW POINT AMPLIFY IN J3.0I IS 10 (PATTERN): BEARING OF LINE OF SONOBUOYS. B. FOR ASW POINT AMPLIFY IN J3.0I IS 11 (LIMITING LINE OF APPROACH): BEARING OF LINE.	J3.0C3

DFI NAME
372 BEARING

DUI NAME	EXPLANATION	APPLICABILITY
024 BEARING ACCURACY, ASW [4 BIT]	THE ACCURACY OF THE BEARING(S) BEING REPORTED IS EQUAL TO OR BETTER THAN THE REPORTED BEARING ACCURACY. WHEN TWO BEARINGS ARE REPORTED, THE SAME BEARING ACCURACY APPLIES TO BOTH BEARINGS.	J5.4C1

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
0 THROUGH 359 65175/65535 DEGREES NO STATEMENT	0 THROUGH 65534 65535	IN 360/65535 DEGREE INCREMENTS.
----- FOR DUI 007 -----		
0 THROUGH 359 3736/4096 DEGREES	0 THROUGH 4095	IN 360/4096 DEGREE INCREMENTS.
----- FOR DUIS 019 AND 020 -----		
0 THROUGH 359 DEGREES ILLEGAL NO STATEMENT	0 THROUGH 359 360 THROUGH 510 511	IN 1 DEGREE INCREMENTS.
----- FOR DUI 018 -----		
0 THROUGH 359 99/100 DEGREES ILLEGAL NO STATEMENT	0 THROUGH 35999 36000 THROUGH 65534 65535	IN 1/100 OF A DEGREE INCREMENTS.
----- FOR DUIS 021 AND 022 -----		
0 THROUGH 358 19/32 DEGREES	0 THROUGH 255	

B-266

MIL-STD-6016B
APPENDIX B

DFI NAME
372 BEARING

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
----- FOR DUI 023 -----		
0 THROUGH 359 DEGREES	0 THROUGH 359	IN 1 DEGREE INCREMENTS
ILLEGAL	360 THROUGH 510	
NO STATEMENT	511	
----- FOR DUI 024 -----		
NO STATEMENT	0	
+ OR - 2 DEGREES	1	
+ OR - 5 DEGREES	2	
+ OR - 10 DEGREES	3	
+ OR - 15 DEGREES	4	
+ OR - 20 DEGREES	5	
+ OR - 30 DEGREES	6	
+ OR - 45 DEGREES	7	
OVER 45 DEGREES	8	
UNDEFINED	9 THROUGH 15	

DFI NAME DEFINITION
373 BEARING REPORT TYPE REPORTS TYPE OF SENSOR FROM WHICH THAT BEARING WAS OBTAINED
AND INDICATES WHETHER BEARING IS AMBIGUOUS OR RESOLVED.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 BEARING REPORT TYPE [2 BIT]	REPORTS TYPE OF SENSOR FROM WHICH THAT BEARING WAS OBTAINED AND INDICATES WHETHER BEARING IS AMBIGUOUS OR RESOLVED.	J5.4E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
BEARING AND RANGE	0	
PASSIVE BEARING (AMBIGUOUS)	1	
PASSIVE BEARING (RESOLVED)	2	
RANGE ONLY	3	

DFI NAME DEFINITION
374 BROADBAND REPORTS THE PRESENCE OF ACOUSTIC BROADBAND NOISE.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 BROADBAND [1 BIT] (BRD BND)	REPORTS THE PRESENCE OF ACOUSTIC BROADBAND NOISE.	J5.4C1

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
BROADBAND NOISE	1	

DFI NAME
375 RANGE ACCURACY, ASW

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
----------	-------------	---------------

001 RANGE ACCURACY, ASW [4 BIT]	THE VALUES EXPRESS THE PLUS OR MINUS ACCURACY OF THE RANGE OF AN ASW CONTACT.	J5.4C1
------------------------------------	---	--------

DATA ITEM	BIT CODE	EXPLANATION
-----------	----------	-------------

----- FOR DUI 001 -----

NO STATEMENT	0
0.5 MILES	1
1 MILE	2
2 MILES	3
3 MILES	4
5 MILES	5
10 MILES	6
15 MILES	7
20 MILES	8
25 MILES	9
30 MILES	10
35 MILES	11
40 MILES	12
50 MILES	13
75 MILES	14
100 MILES	15

B-270

MIL-STD-6016B
APPENDIX B

DFI NAME DEFINITION
376 IDENTITY

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
001 IDENTITY AMPLIFYING DESCRIPTOR A [3 BIT] (ID AMP DESCR)	A DESCRIPTOR ADDING TO THE STANDARD IDENTITY OF A TRACK INVOLVED IN AN EXERCISE. THE STANDARD IDENTITY IS FRIEND.	J3.2I J3.5I J5.4I J12.6E0	J3.3I J3.6I J7.0I	J3.4I J3.7I J12.0C2
002 IDENTITY, EVALUATED [3 BIT]	REPORTS THE C2 EVALUATED IDENTITY OF A CORRELATED NONC2 JU TRACK.	J12.5I		
007 IDENTITY [3 BIT]	EXPRESSES THE STANDARD IDENTITY OF A TRACK.	J3.2I J3.5I J5.4I J12.6E0	J3.3I J3.6I J7.0I	J3.4I J3.7I J12.0C2

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
EXERCISE PENDING	0	
EXERCISE UNKNOWN	1	
EXERCISE ASSUMED FRIEND	2	
EXERCISE FRIEND	3	
EXERCISE NEUTRAL	4	
JOKER	5	
FAKER	6	
UNDEFINED	7	
----- FOR DUI 002 AND 007 -----		
PENDING	0	A TRACK WHICH HAS NOT BEEN SUBJECTED TO THE IDENTIFICATION PROCESS.
UNKNOWN	1	AN EVALUATED TRACK WHICH HAS NOT BEEN IDENTIFIED.
ASSUMED FRIEND	2	A TRACK WHICH IS ASSUMED TO BE A FRIEND BECAUSE OF ITS CHARACTERISTICS, BEHAVIOR, OR ORIGIN.
FRIEND	3	A TRACK BELONGING TO A DECLARED FRIENDLY NATION.
NEUTRAL	4	A TRACK WHOSE CHARACTERISTICS,

DFI NAME
376 IDENTITY

DATA ITEM (CONTINUED) (CONTINUED)	BIT CODE	EXPLANATION BEHAVIOR, ORIGIN, OR NATIONALITY INDICATE THAT IT IS NEITHER SUPPORTING NOR OPPOSING FRIENDLY FORCES.
SUSPECT	5	A TRACK WHICH IS POTENTIALLY HOSTILE BECAUSE OF ITS CHARACTERISTICS, BEHAVIOR, ORIGIN, OR NATIONALITY.
HOSTILE	6	A TRACK DECLARED TO BELONG TO ANY OPPOSING NATION, PARTY, GROUP, OR ENTITY, WHICH BY VIRTUE OF ITS BEHAVIOR OR INFORMATION COLLECTED ON IT SUCH AS CHARACTERISTICS, ORIGIN OR NATIONALITY CONTRIBUTES TO THE THREAT TO FRIENDLY FORCES.
UNDEFINED	7	

DFI NAME DEFINITION
377 SOUND PROPAGATION PATH REPORTS THE PATH VIA WHICH THE ACOUSTIC DETECTION WAS GAINED.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 SOUND PROPAGATION PATH [4 BIT]	REPORTS THE PATH VIA WHICH THE ACOUSTIC DETECTION WAS GAINED.	J5.4C2

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
UNKNOWN	1	
DIRECT PATH	2	
BOTTOM BOUNCE	3	
CONVERGENCE ZONE 1	4	
CONVERGENCE ZONE 2	5	
CONVERGENCE ZONE 3	6	
OR BEYOND		
CONVERGENCE ZONE UNSPECIFIED	7	
MULTIPATH	8	
UNDEFINED	9 THROUGH 15	

DFI NAME DEFINITION
378 POINT/TRACK INDICATOR IDENTIFIES WHETHER LAND (GROUND) OBJECT BEING REPORTED IS A POINT OR TRACK.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 POINT/TRACK INDICATOR [1 BIT] (PTI)	IDENTIFIES WHETHER REPORTED OBJECT IS A POINT OR TRACK.	J3.5I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
POINT	0	REPORTED OBJECT IS A POINT.
TRACK	1	REPORTED OBJECT IS A TRACK.

DFI NAME
379 POINT TYPE AMPLIFICATION

DEFINITION
SUBDIVIDES THE POINT TYPE FIELD TO FURTHER IDENTIFY POINTS.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
----------	-------------	---------------

002 POINT AMPLIFICATION [4 BIT]	USED IN CONJUNCTION WITH POINT TYPE TO DEFINE THE IDENTITY OF A POINT.	J3.0I
------------------------------------	---	-------

DATA ITEM	BIT CODE	EXPLANATION
-----------	----------	-------------

----- FOR DUI 002 -----

FOR HAZARD (0)

NO STATEMENT	0	A GENERAL HAZARD POINT THAT MUST BE AMPLIFIED BY VOICE OR PREDETERMINED PROCEDURES.
NAVIGATION	1	A POINT THAT INDICATES ANY HAZARD TO NAVIGATION IRRESPECTIVE OF ENVIRONMENT/CATEGORY I.E., SHIPWRECK, TALL ANTENNA, ETC.
MINE	2	A POINT AT WHICH A MINE OR MINES IS/ ARE LOCATED.
IMPACT POINT	3	THE REAL OR EXPECTED POINT THAT A DEVICE HAS OR WILL PENETRATE OR CONTACT A SURFACE.
GROUND ZERO	4	A POINT ON THE SURFACE OF THE EARTH AT, OR DIRECTLY BELOW OR ABOVE, THE CENTER OF A PLANNED OR ACTUAL NUCLEAR DETONATION.
AIM/WEAPON ENTRY POINT	5	A POINT THAT A DEVICE IS INTENDED TO PASS THROUGH PRIOR TO ARRIVAL AT THE FINAL DESTINATION OR TARGET. PRIMARILY USED IN MARITIME OPERATIONS TO INDICATE THE WATER ENTRY POINT FOR AN ASW WEAPON.
MISSILE LAUNCH POINT	6	A POINT INDICATING THE POSITION FROM WHICH A MISSILE HAS BEEN OR WILL BE LAUNCHED.
ELECTRONIC ATTACK (EA) DECOY	7	A POINT AT WHICH A DEVICE IS LOCATED THAT PRODUCES FALSE TARGETS, I.E., TARGET GENERATION, CHAFF, AND

APPENDIX B

DFI NAME
379 POINT TYPE AMPLIFICATION

DATA ITEM (CONTINUED)

FOR HAZARD (0)

BIT CODE
(CONTINUED)

EXPLANATION

(CONTINUED)
ENGAGEMENT POINT

8

CONFUSION DEFLECTOR.
THE REAL OR EXPECTED POINT AT WHICH
ORDNANCE IS BEING OR WILL BE
DELIVERED AGAINST A GROUND TARGET.
A POINT AT WHICH AN OIL RIG IS
LOCATED.

OIL RIG

9

UNDEFINED

10 THROUGH 15

FOR REFERENCE POINT
(GENERAL) (1)

NO STATEMENT

0

A GENERAL NONHAZARD REFERENCE POINT
THAT MUST BE AMPLIFIED BY VOICE OR
PREDETERMINED PROCEDURES.

MARSHALL POINT

1

A POINT USED TO ASSEMBLE, HOLD, OR
ORGANIZE TROOPS, AIRCRAFT, OR
SHIPS FOR A MISSION.

WAYPOINT

2

A POINT IN SPACE TO WHICH AN
AIRCRAFT MAY BE VECTORED.

CORRIDOR TAB

3

A POINT DEFINING THE BOUNDARY OF A
CORRIDOR.

POSITION AND INTENDED
MOVEMENT (PIM)

4

A REFERENCE POINT ESTABLISHED BY THE
OFFICER IN TACTICAL COMMAND AT A
GIVEN TIME, AND A FORECAST OF THE
COURSE(S) AND SPEED(S) EXPECTED TO
BE MADE GOOD OVER THE GROUND.
PIMS ARE ESTABLISHED TO ASSIST THE
RETURN OF AIRCRAFT, TO AID
OUTLYING SURFACE UNITS IN
MAINTAINING THEIR STATIONS, AND
FOR RENDEZVOUS PURPOSES.

DISPOSITION CENTER

5

A POINT DESIGNATED AS THE CENTER OF
A PRESCRIBED ARRANGEMENT OF
STATIONS TO BE OCCUPIED BY SEVERAL
FORMATIONS AND SINGLE SHIPS OF A

APPENDIX B

DFI NAME
379 POINT TYPE AMPLIFICATION

DATA ITEM (CONTINUED)

FOR REFERENCE POINT
(GENERAL) (1)

(CONTINUED)

BIT CODE
(CONTINUED)

EXPLANATION

FORMATION CENTER

6

FLEET OR MAJOR SUBDIVISIONS OF A FLEET FOR SUBPURPOSE, SUCH AS CRUISING, APPROACH, MAINTAINING CONTACT OR BATTLE. A PRESCRIBED ARRANGEMENT OF ALL THE TACTICAL UNITS COMPOSING A FLIGHT OR GROUP OF AIRCRAFT.

A POINT DESIGNATED AS THE CENTER OF AN ORDERED ARRANGEMENT OF UNITS, NORMALLY THE GEOMETRIC CENTER. IT IS THE POINT OF ORIGIN OF A FORMATION AXIS.

SEARCH AREA
VICTOR LIMA (VL)

7

THE CENTER OF A SEARCH AREA.

8

THE REFERENCE POINT FOR AIRCRAFT CONDUCTING VECTOR LOGIC TACTICS ON LINK 4A. EQUIVALENT TO LINK 4A DATA LINK REFERENCE POINT.

SUBMARINE POSITION AND
INTENDED MOVEMENT
(SIM)

9

A REFERENCE POINT DEFINING THE GEOGRAPHIC POSITION AND INTENDED MOVEMENT OF A SUBMARINE OPERATING IN DIRECT SUPPORT OF A BATTLE GROUP, OR OF A SUBMARINE PATROL AREA (SPA).

UNDEFINED
DEFENDED ASSET

10

11

A LOCATION OR FACILITY DESIGNATED AS HAVING TACTICAL SIGNIFICANCE AND DEFENDED BY AIR DEFENSE RESOURCES.

UNDEFINED

12 THROUGH 15

B-277

DFI NAME
379 POINT TYPE AMPLIFICATION

DATA ITEM (CONTINUED)

FOR STATION (GENERAL)
(2)

NO STATEMENT

BIT CODE

0

EXPLANATION

A GENERAL POINT DESCRIBING A NONAIR
STATION THAT MUST BE AMPLIFIED BY
VOICE OR PREDETERMINED PROCEDURES.
A POINT OCCUPIED BY A SURFACE UNIT
CAPABLE OF PERFORMING AIR CONTROL
FUNCTIONS WHOSE PURPOSE IS TO
SCREEN RETURNING AIRCRAFT TO
PREVENT ENEMY AIRCRAFT FROM
LOCATING THE FORCE.

TOMCAT

1

A POINT OUTSIDE A FORMATION OR
GEOGRAPHIC AREA WHERE AN AIRCRAFT
OR SHIP IS STATIONED AS A RESCUE
OR WARNING UNIT.

PICKET

2

A POINT FOR A PREARRANGED MEETING AT
A GIVEN TIME AND LOCATION
FROM WHICH TO BEGIN AN ACTION OR
PHASE OF AN OPERATION OR TO WHICH
TO RETURN, AFTER AN OPERATION.

RENDEZVOUS

3

UNDEFINED
REPLENISHMENT

4
5

A POINT WHERE REARMING AND RESUPPLY
OF UNITS OTHER THAN AIRCRAFT MAY
BE CONDUCTED.

RESCUE

6

A POINT USED TO MARK THE POSITION OF
A RESCUE OPERATION.

UNDEFINED

7 THROUGH 15

FOR STATION (AIR) (3)

NO STATEMENT

0

A GENERAL POINT DESCRIBING AN AIR
STATION THAT MUST BE AMPLIFIED BY
VOICE OR PREDETERMINED PROCEDURES.
A POINT AT WHICH CAP AIRCRAFT ARE OR
WILL BE ORBITING OR MANEUVERING.

COMBAT AIR PATROL (CAP)

1

B-278

APPENDIX B

MIL-STD-6016B

DFI NAME
379 POINT TYPE AMPLIFICATION

DATA ITEM (CONTINUED)

FOR STATION (AIR) (3)

BIT CODE
(CONTINUED)

EXPLANATION

AIRBORNE EARLY WARNING
(AEW)
ANTISUBMARINE WARFARE
(ASW) FIXED WING

2

3

ANTISUBMARINE WARFARE
(ASW) HELICOPTER
(HELO)

4

REPLENISHMENT

5

STRIKE INITIAL POINT
(IP)

6

TACAN
TANKER

7

8

ORBIT, RACE TRACK

9

ORBIT, FIGURE EIGHT

10

ORBIT, RANDOM CLOSED

11

ORBIT POINT

12

UNDEFINED

13 THROUGH 15

FOR LINE (4)

NO STATEMENT

0

A POINT AT WHICH AEW AIRCRAFT ARE OR
WILL BE ORBITING OR MANEUVERING.
A POINT DENOTING A STATION WHERE A
FIXED WING AIRCRAFT ON AN
ANTISUBMARINE WARFARE MISSION WILL
OPERATE.
A POINT DENOTING A STATION WHERE A
HELICOPTER WHOSE MISSION IS
ANTISUBMARINE WARFARE WILL
OPERATE.
A POINT WHERE AIRCRAFT REARMING AND
RESUPPLY MAY BE CONDUCTED.
A POINT IN SPACE THAT AIRCRAFT
RENDEZVOUS OR PASS THROUGH PRIOR
TO ATTACKING A GROUND TARGET.
A POINT AT WHICH A TACAN IS LOCATED.
A POINT AT WHICH A TANKER AIRCRAFT
IS OR WILL BE ORBITING OR
MANEUVERING.
AN OVAL WITHIN A RECTANGLE THAT THE
AIRCRAFT IS OR WILL BE TRACKING.
A FIGURE EIGHT PATTERN WITHIN A
RECTANGLE THAT THE AIRCRAFT IS OR
WILL BE TRACKING.
A RECTANGLE IN WHICH THE AIRCRAFT
WILL TRACK RANDOMLY.
A POINT DESIGNATED FOR AN AIRCRAFT
TO ORBIT.
A GENERAL LINE THAT MUST BE
AMPLIFIED BY VOICE OR
PREDETERMINED PROCEDURES.

B-279

APPENDIX B

MIL-STD-6016B

DFI NAME
379 POINT TYPE AMPLIFICATION

DATA ITEM (CONTINUED)

FOR LINE (4)

BIT CODE
(CONTINUED)

EXPLANATION

FORWARD EDGE OF THE
BATTLE AREA

GUN TARGET LINE

CORRIDOR

HOSTILE BOUNDARY

BUFFER ZONE BOUNDARY

LOW LEVEL TRANSIT ROUTE

TACTICAL ACTION LINE

FIRE SUPPORT
COORDINATION LINE (FSCL)

1

2

3

4

5

6

7

8

THE FOREMOST LIMITS OF A SERIES OF
AREAS IN WHICH GROUND COMBAT UNITS
ARE DEPLOYED, EXCLUDING THE AREAS
IN WHICH THE COVERING OR SCREENING
FORCES ARE OPERATING.

A STRAIGHT LINE FROM THE GUN(S) TO
THE TARGET. ALTITUDE, IF
INCLUDED, IS THE APEX OF THE
PROJECTILE.

A LINE DESCRIBING THE CENTER OF A
ROUTE DESIGNATED FOR TRAVEL BY
FRIENDLY AIRCRAFT.

A LINE THAT INDICATES A LIMIT BEYOND
WHICH EXISTS A HOSTILE
ENVIRONMENT.

A LINE BEYOND WHICH FRIENDLY
AIRCRAFT USUALLY DO NOT FLY IN
PEACETIME.

A LINE DESCRIBING THE CENTER LINE OF
A ROUTE THROUGH THE FORWARD
MISSILE ENGAGEMENT ZONE (MEZ) THAT
MUST BE FLOWN BY FRIENDLY AIRCRAFT
TO ENSURE THEY ARE NOT DESIGNATED
HOSTILE BY DEFENSE SYSTEMS.

A LINE POSITIONED IN HOSTILE
AIRSPACE WHICH MAY BE USED IN
CONJUNCTION WITH OTHER CRITERIA
FOR HOSTILE DETERMINATION.

A LINE ESTABLISHED BY THE
APPROPRIATE GROUND COMMANDER TO
ENSURE COORDINATION OF FIRE NOT
UNDER HIS COMMAND BUT WHICH MAY
AFFECT CURRENT TACTICAL
OPERATIONS. ATTACKS AGAINST
GROUND TARGETS BEHIND THIS LINE
MUST BE COORDINATED WITH THE
APPROPRIATE GROUND COMMANDER.

B-280

MIL-STD-6016B

APPENDIX B

DFI NAME
379 POINT TYPE AMPLIFICATION

DATA ITEM (CONTINUED)

FOR LINE (4)

FORWARD LINE OF OWN
TROOPS (FLOT)

UNDEFINED

FOR AREA (GENERAL) (5)

NO STATEMENT

SEARCH

RESTRICTED

EXERCISE

SUBMARINE PATROL AREA

FIGHTER ENGAGEMENT ZONE/
FIGHTER AOR

GROUND AREA OF
RESPONSIBILITY

BIT CODE
(CONTINUED)

9

10 THROUGH 15

0

1

2

3

4

5

6

EXPLANATION

A LINE DEFINING THE FORWARD POSITION
OF OWN TROOPS WITHIN A GROUND AREA
OF RESPONSIBILITY, THAT DOES NOT
USUALLY COINCIDE WITH THE FEBA.

A GENERAL NONHAZARD AREA THAT MUST
BE AMPLIFIED BY VOICE OR
PREDETERMINED PROCEDURES.

AN AREA WHERE A SEARCH IS BEING OR
WILL BE CONDUCTED. NORMALLY
ASSOCIATED WITH A SAR MISSION.

A SPECIFIED AREA DESIGNATED BY THE
AREA AIRSPACE MANAGEMENT AUTHORITY
WHERE FLIGHT IS RESTRICTED WITHOUT
PRIOR APPROVAL.

AN AREA FOR MILITARY MANEUVER OR
SIMULATED WARTIME OPERATION
INVOLVING PLANNING, PREPARATION
AND EXECUTION.

A RESTRICTED AREA ESTABLISHED TO
ALLOW SUBMARINE OPERATIONS TO BE
UNIMPEDED BY THE OPERATION, OR
POSSIBLE ATTACK FROM FRIENDLY
FORCES IN WARTIME, OR TO BE
CONDUCTED WITHOUT SUBMERGED MUTUAL
INTERFERENCE IN PEACETIME.

AIRSPACE OF DEFINED DIMENSIONS
WITHIN WHICH THE RESPONSIBILITY
FOR ENGAGEMENT NORMALLY RESTS WITH
FIGHTER AIRCRAFT.

AREA OF GROUND WITHIN WHICH THE
RESPONSIBILITY FOR ENGAGEMENT

APPENDIX B

DFI NAME
379 POINT TYPE AMPLIFICATION

DATA ITEM (CONTINUED)

FOR AREA (GENERAL) (5)

BIT CODE
(CONTINUED)

EXPLANATION

(CONTINUED)

NORMALLY RESTS WITH THE
APPROPRIATE GROUND FORCE
COMMANDER.

DEFENDED AREA

7

AN AREA THE SOURCE TN IS CAPABLE OF
DEFENDING AGAINST BALLISTIC
MISSILES, ETC., (I.E. THE SOURCE TN
IS OPERATIONAL WITH READY WEAPONS
AND HAS DESIGNATED THE AREA FOR
DEFENSE).

UNDEFINED

8 THROUGH 15

FOR AREA (HAZARD) (6)

NO STATEMENT

0

A GENERAL HAZARD AREA THAT MUST BE
AMPLIFIED BY VOICE OR
PREDETERMINED PROCEDURES.

DANGER

1

A SPECIFIED AREA ABOVE, BELOW, OR
WITHIN WHICH THERE MAY BE A
POTENTIAL DANGER.

CONTAMINATED

2

AN AREA CAUSED BY THE DEPOSIT AND/OR
ABSORPTION OF RADIOACTIVE
MATERIAL, OR OF BIOLOGICAL OR
CHEMICAL AGENTS ON AND BY
STRUCTURES, AREAS, PERSONNEL, OR
OBJECTS.

ALLIED MISSILE
ENGAGEMENT ZONE

3

PRIMARY ENGAGEMENT AREA DESIGNATED
FOR FRIENDLY SURFACE TO AIR
MISSILES.

HOSTILE MISSILE
ENGAGEMENT ZONE

4

AN AREA IN WHICH HOSTILE SURFACE-TO-
AIR MISSILES (SAMS) ARE CAPABLE OF
ENGAGEMENT.

HOSTILE WEAPON ZONE

5

AN AREA IN WHICH HOSTILE
ANTI-AIRCRAFT ARTILLERY (AAA) IS
CAPABLE OF ENGAGEMENT.

HOSTILE TACTICAL ZONE

6

AN AREA IN WHICH HOSTILE TACTICAL

DFI NAME
379 POINT TYPE AMPLIFICATION

DATA ITEM (CONTINUED)

FOR AREA (HAZARD) (6)

BIT CODE
(CONTINUED)

EXPLANATION

(CONTINUED)

SHORAD

7

FORCES (TO INCLUDE GROUND, AIR, OR MARITIME) ARE KNOWN TO BE OR WILL BE OPERATING.

KILL ZONE

8

AN AREA DEFENDED BY FRIENDLY ARMY SHORT RANGE AIR DEFENSE SYSTEMS. AN AIR DEFENSE SYSTEM (SOC) AREA IN WHICH FRIENDLY FIGHTERS MAY USE LESS RESTRICTIVE RULES OF ENGAGEMENT.

TARGET AREA OF INTEREST

9

AN ENGAGEMENT AREA USUALLY ALONG AN ENEMY MOBILITY CORRIDOR.

NAMED AREA OF INTEREST
(NAI)

10

AN AREA USUALLY ALONG AN ENEMY MOBILITY CORRIDOR WHERE ENEMY ACTIVITY (OR INACTIVITY) CONFIRMS A PARTICULAR COURSE OF ACTION.

UNDEFINED

11 THROUGH 15

FOR ASW (7)

NO STATEMENT

0

A GENERAL ASW POINT, LINE, OR AREA THAT MUST BE AMPLIFIED BY VOICE OR PREDETERMINED PROCEDURES.

SINKER

1

A RADAR CONTACT THAT LATER DISAPPEARED.

BRIEF CONTACT

2

A CONTACT THAT WAS NOT HELD LONG ENOUGH TO GENERATE COURSE AND SPEED INFORMATION.

SEARCH CENTER (ASW)

3

A GEOGRAPHICALLY FIXED ORIGIN OR REFERENCE POINT OF AN ASW SEARCH WHEN ESTABLISHED AT A POINT OTHER THAN DATUM.

ESTIMATED POSITION (EP)

4

AN ASSUMED POSITION BASED UPON INPUT FROM NONSENSOR INPUTS.

FIX (ASW)

5

A CORRELATED POSITION OF A SUBMARINE DERIVED FROM TWO OR MORE SENSOR

APPENDIX B

DFI NAME
379 POINT TYPE AMPLIFICATION

DATA ITEM (CONTINUED)

FOR ASW (7)

BIT CODE
(CONTINUED)

EXPLANATION

(CONTINUED)
NOTACK AREA

6

INPUTS.
A SMALL AREA ESTABLISHED BY THE
SUBMARINE WITHIN THE SPA TO ALLOW
FRIENDLY FORCES TO PROSECUTE A
SUBMARINE CONTACT WITHIN THE
REMAINDER OF THE SPA WHILE
CONTINUING TO PROVIDE PROTECTION
TO THE SUBMARINE.

MOVING HAVEN

7

RESTRICTED AREAS ESTABLISHED TO
PROVIDE A MEASURE OF SECURITY TO
SUBMARINES AND SURFACE SHIPS IN
TRANSIT THROUGH AREAS IN WHICH THE
EXISTING ATTACK RESTRICTIONS WOULD
BE INADEQUATE TO PREVENT ATTACK BY
FRIENDLY FORCES.

DISUSED
SONOBUOY POSITION

8
9

THE GEOGRAPHIC POSITION OF AN ACTUAL
SONOBUOY, A SONAR DEVICE USED TO
DETECT SUBMARINES WHICH, WHEN
ACTIVATED, RELAYS INFORMATION BY
RADIO.

SONOBUOY PATTERN
REFERENCE POSITION

10

A GEOGRAPHIC POSITION RELATIVE TO
WHICH A PATTERN OF SONOBUOYS ARE
POSITIONED. MAY BE THE POSITION
OF AN ACTUAL SONOBUOY, OR JUST A
GEOGRAPHIC POSITION IN THE WATER
OR ON LAND.

LIMITING LINE
OF APPROACH

11

MATHEMATICALLY CALCULATED LIMIT,
RELATIVE TO THE FORCE, WITHIN
WHICH AN ATTACKING SUBMARINE MUST
BE IN ORDER THAT IT CAN REACH THE
TORPEDO DANGER ZONE (TDZ). THE
TDZ IS AN AREA WHICH THE SUBMARINE
MUST ENTER IN ORDER TO BE WITHIN
MAXIMUM EFFECTIVE TORPEDO FIRING
RANGE.

DFI NAME
379 POINT TYPE AMPLIFICATION

DATA ITEM (CONTINUED)

FOR ASW (7)

AREA OF PROBABILITY
(ASW)

FRIENDLY WEAPON DANGER
AREA (FWDA)
UNDEFINED

FOR ASW, 1 (8)

CHARTED WRECK

BOTTOMED NONSUBMARINE

ASW STATION

UNDEFINED

FOR UNDEFINED (9-15)

UNDEFINED

BIT CODE
(CONTINUED)

12

13

14 THROUGH 15

0

1

2

3 THROUGH 15

0 THROUGH 15

EXPLANATION

A DEFINED AREA IN WHICH THE PRESENCE
OF ONE OR MORE SUBMARINES OR
SURFACE VESSELS IS SUSPECTED.
AN AREA IN WHICH FRIENDLY TORPEDOES
POSE A THREAT TO FRIENDLY FORCES.

GEOGRAPHIC POSITION OF A KNOWN WRECK
OR BOTTOMED FALSE SONAR TARGET.
POSITION OF A FALSE SONAR TARGET
CLASSIFIED AS NONSUBMARINE AND
ASSUMED TO BE BOTTOMED.
POSITION FROM WHICH AN ASW UNIT IS
CONDUCTING AN ACTIVE SONAR SEARCH.

DFI	NAME	DEFINITION			
380	SECOND	EXPRESSES THE SECOND OF THE MINUTE.			
DATA STANDARD USAGE: Link 16		STATUS:			
DUI	NAME	EXPLANATION	APPLICABILITY		
001	SECOND [6 BIT]	THE SECOND OF THE MINUTE.	J3.0C5 J9.0C2 J14.0I	J3.6I J12.6C2 J14.2E0	J3.7I J12.7E1
002	HUNDREDTHS [7 BIT]	HUNDREDTHS OF A SECOND.	J12.6C2	J12.7E1	
003	TIME OF EVENT, SECOND [6 BIT]	THE SECOND (NETWORK TIME) AT WHICH THE EVENT WILL OCCUR AGAINST THE TARGET.	J12.6C5		
004	TIME OF EVENT, HUNDREDTHS [7 BIT]	THE HUNDREDTHS OF A SECOND (NETWORK TIME) AT WHICH THE EVENT WILL OCCUR AGAINST THE TARGET.	J12.6C5		
005	EVENT DURATION, SECONDS [6 BIT]	THE LENGTH OF TIME THE EVENT WILL OCCUR AGAINST THE TARGET.	J12.6C5		
006	EVENT DURATION, HUNDREDTHS [7 BIT]	THE LENGTH OF TIME THE EVENT WILL OCCUR AGAINST THE TARGET.	J12.6C5		
007	SECOND, TENTHS [10 BIT]	EXPRESSES THE SECOND OF THE MINUTE IN ONE TENTH SECONDS.	J10.2C2		
DATA ITEM		BIT CODE	EXPLANATION		
----- FOR DUI 001, 003, AND 005 -----					
0 THROUGH 59 ILLEGAL NO STATEMENT		0 THROUGH 59 60 THROUGH 62 63	IN ONE SECOND INCREMENTS.		
----- FOR DUI 002, 004, AND 006 -----					
0 THROUGH 99 HUNDREDTHS ILLEGAL NO STATEMENT		0 THROUGH 99 100 THROUGH 126 127	IN HUNDREDTHS OF SECOND INCREMENTS.		

DFI NAME
380 SECOND

DATA ITEM (CONTINUED)
----- FOR DUI 007 -----

0 THROUGH 59.9
ILLEGAL
NO STATEMENT

BIT CODE

0 THROUGH 599
600 THROUGH 1022
1023

EXPLANATION

IN ONE TENTH SECOND INCREMENTS.

DFI	NAME	DEFINITION
381	TRACK NUMBER, REFERENCE/INDEX NUMBER INDICATOR	INDICATES WHETHER TRACK NUMBER REFERENCE OR INDEX NUMBER IS BEING REPORTED.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 TRACK NUMBER, REFERENCE/INDEX NUMBER INDICATOR [1 BIT] (TNR INI)	INDICATES WHETHER TRACK NUMBER REFERENCE OR INDEX NUMBER IS BEING REPORTED.	J14.0I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
TRACK NUMBER, REFERENCE IS BEING REPORTED	0	TRACK NUMBER, REFERENCE IS BEING REPORTED.
INDEX NUMBER IS BEING REPORTED	1	INDEX NUMBER IS BEING REPORTED.

DFI NAME DEFINITION
382 FIX OR BEARING TYPE AN INDICATION THAT A TRACK IS A FIX OR BEARING.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
004 FIX OR BEARING DESCRIPTOR [3 BIT] (FIX BRG)	DESCRIBES WHETHER THE MESSAGE REFERS TO A FIX, AREA OF PROBABILITY, OR TYPE OF BEARING.	J3.7I J14.0I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 004 -----		
EW FIX	0	
AREA OF PROBABILITY	1	
BEARING, TYPE	2	LINE OF BEARING FOR WHICH THE REPORTING JU IS UNABLE TO SPECIFY THE BEARING AS ES, EA, OR RDF.
NOT SPECIFIED		A LINE OF BEARING DERIVED FROM ES SOURCES OTHER THAN RDF.
BEARING, ES	3	JAM STROBE.
BEARING, EA	4	A LINE OF BEARING DERIVED FROM RADIO DIRECTION FINDING WITH NO ASSOCIATED PARAMETRIC DATA.
BEARING, RADIO DIRECTION FINDING	5	
DISUSED	6	
BEARING, UNKNOWN	7	THE DIRECTION OF THE ARRIVAL OF THE SIGNAL IS UNKNOWN.

B-289

MIL-STD-6016B
APPENDIX B

DFI NAME DEFINITION
383 BEARING ACCURACY IDENTIFIES THE ESTIMATED ACCURACY OF THE BEARING.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
006 BEARING ACCURACY [4 BIT] (BA)	THE BEARING ACCURACY IS STATED AS A NUMERICAL VALUE FROM 1 TO 15 WITH THE HIGHER VALUES INDICATING THE HIGHER ASSET BEARING ACCURACIES. THE ASSET BEARING ACCURACY IS REPRESENTED IN DEGREES OF ACCURACY AT A RANGE OF 300 DATA MILES BETWEEN THE ES RECEIVER AND THE TARGET EMITTER.	J3.7C1 J14.0C1

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 006 -----		
NO STATEMENT	0	
> 10.0 DEGREES	1	
<= 10.0 DEGREES	2	
<= 5.0 DEGREES	3	
<= 4.0 DEGREES	4	
<= 3.0 DEGREES	5	
<= 2.0 DEGREES	6	
<= 1.0 DEGREES	7	
<= 0.4 DEGREES	8	
<= 0.2 DEGREES	9	
<= 0.032 DEGREES	10	
<= 0.016 DEGREES	11	
<= 0.008 DEGREES	12	
<= 0.004 DEGREES	13	
<= 0.002 DEGREES	14	
<= 0.001 DEGREES	15	

APPENDIX B

DFI NAME DEFINITION
384 RATE OF CHANGE

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 BEARING ANGLE RATE [9 BIT]	RATE OF CHANGE OF THE BEARING ANGLE. BEARING ANGLE RATE IS THE SUM OF THE OBSERVER AND TARGET RATES IN THE BEARING PLANE.	J12.7E1
002 ELEVATION ANGLE RATE [9 BIT]	RATE OF CHANGE OF THE ELEVATION ANGLE. ELEVATION ANGLE RATE IS THE SUM OF OBSERVER AND TARGET RATES IN THE ELEVATION PLANE.	J12.7E1
003 RANGE RATE [13 BIT]	RATE OF CHANGE OF THE RANGE. RANGE RATE IS THE SUM OF OBSERVER AND TARGET RATES ALONG THE LINE-OF-SIGHT BETWEEN THE OBSERVER AND THE TARGET.	J12.7C1

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001 AND 002 -----		
-90 THROUGH 89.6477 DEGREES PER SECOND	0 THROUGH 510	INDICATES BEARING/ELEVATION ANGLE RATE IN .3523 DEGREES/SEC INCREMENTS.
NO STATEMENT	511	
----- FOR DUI 003 -----		
0 THROUGH 4095 FT/SEC	0 THROUGH 4095	IN ONE FOOT/SEC INCREMENTS.
NO STATEMENT	4096	
-4095 FT/SEC THROUGH -1 FT/SEC	4097 THROUGH 8191	

DFI	NAME	DEFINITION
385	DATA TYPE INDICATOR	AN INDICATION OF THE TYPE OF TRACK DATA BEING REPORTED.

DATA STANDARD USAGE: Link 16	STATUS:
------------------------------	---------

DUI NAME	EXPLANATION	APPLICABILITY		
003 EXERCISE INDICATOR [1 BIT] (EX IND)	INDICATES WHETHER OR NOT THE MESSAGE IDENTIFIES AN EXERCISE TRACK.	J2.0I	J2.2I	J2.3I
		J2.4I	J2.5I	J2.6I
		J3.0I	J3.1I	J3.2I
		J3.3I	J3.4I	J3.5I
		J3.6I	J3.7I	J5.4I
		J7.0I	J9.0I	J12.0C2
		J12.6E0	J15.0I	

DATA ITEM	BIT CODE	EXPLANATION
-----------	----------	-------------

----- FOR DUI 003 -----

NON-EXERCISE TRACK	0
EXERCISE TRACK OR UNIT	1

DFI NAME DEFINITION
 386 FLIGHT/FORCE SIZE EXPRESSES AN ESTIMATE OF THE NUMBER OF ENTITIES REPRESENTED BY A SINGLE TRACK.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
001 STRENGTH, TOTAL NUMBER OF VEHICLES [4 BIT]	SPECIFIES THE TOTAL NUMBER OF VEHICLES ASSOCIATED WITH THE TN, REFERENCE.	J3.5C3	J7.0E0	
002 STRENGTH, PERCENT OF TRACKED VEHICLES [4 BIT] (STR, % TRKD VEH)	SPECIFIES THE PERCENTAGE OF THE TOTAL NUMBER OF VEHICLES ASSOCIATED WITH THE TN, REFERENCE THAT ARE TRACKED TYPE VEHICLES.	J3.5C3	J7.0E0	
003 STRENGTH, EVALUATED [4 BIT]	REPORTS THE C2 EVALUATED STRENGTH OF A CORRELATED NONC2 JU TRACK.	J12.5I		
013 STRENGTH [4 BIT]	EXPRESSES THE NUMBER OF ENTITIES REPRESENTED BY A SINGLE TRACK.	J2.2I J2.6I J3.5I J12.6C1	J2.3I J3.2I J7.0I J15.0I	J2.5I J3.3I J12.0C1

DATA ITEM	BIT CODE	EXPLANATION
-----------	----------	-------------

----- FOR DUI 001 -----

NO STATEMENT	0
1 VEHICLE	1
2 VEHICLES	2
3 VEHICLES	3
4 THROUGH 5 VEHICLES	4
6 THROUGH 7 VEHICLES	5
8 THROUGH 10 VEHICLES	6
11 THROUGH 15 VEHICLES	7
16 THROUGH 20 VEHICLES	8
21 THROUGH 30 VEHICLES	9
31 THROUGH 40 VEHICLES	10
41 THROUGH 50 VEHICLES	11
51 THROUGH 70 VEHICLES	12
71 THROUGH 100 VEHICLES	13
101 THROUGH 200 VEHICLES	14
GREATER THAN 200 VEHICLES	15

DFI NAME
386 FLIGHT/FORCE SIZE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
----- FOR DUI 002 -----		
NO STATEMENT	0	
<OR= 2% TRACKED VEHICLES	1	
>2%<OR= 4% TRACKED VEHICLES	2	
>4%<OR= 6% TRACKED VEHICLES	3	
>6%<OR= 8% TRACKED VEHICLES	4	
>8%<OR= 10% TRACKED VEHICLES	5	
>10%<OR= 15% TRACKED VEHICLES	6	
>15%<OR= 20% TRACKED VEHICLES	7	
>20%<OR= 25% TRACKED VEHICLES	8	
>25%<OR= 30% TRACKED VEHICLES	9	
>30%<OR= 40% TRACKED VEHICLES	10	
>40%<OR= 50% TRACKED VEHICLES	11	
>50%<OR= 60% TRACKED VEHICLES	12	
>60%<OR= 70% TRACKED VEHICLES	13	
>70%<OR= 80% TRACKED VEHICLES	14	
>80% TRACKED VEHICLES	15	
----- FOR DUI 003 AND 013 -----		
NO STATEMENT	0	
1 UNIT	1	
2 UNITS	2	
3 UNITS	3	
4 UNITS	4	
5 UNITS	5	
6 UNITS	6	

DFI NAME
386 FLIGHT/FORCE SIZE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
7 UNITS	7	
8 UNITS	8	
9 UNITS	9	
10 UNITS	10	
11 UNITS	11	
12 UNITS	12	
2 THROUGH 7 (FEW) UNITS	13	
GREATER THAN 7 (MANY) UNITS	14	
GREATER THAN 12 UNITS	15	

DFI NAME DEFINITION
387 TIME EXPRESSES TIME IN HOURS, MINUTES, AND/OR SECONDS.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
018 TIME-TO-GO [5 BIT]	TIME REMAINING UNTIL THE ACTION DE- SCRIBED IN THE MESSAGE OCCURS.	J12.2I
019 TIME OF ARRIVAL [19 BIT]	THE TIME INDICATED BY THE TERMINAL'S CLOCK AT THE TIME OF RECEPTION AT THE ANTENNA OF THE END OF THE FINAL 26-MICROSECOND TRANSMISSION SYMBOL OF THE RTT INTERROGATION MESSAGE.	RTT-REP
023 TIME TO INTERCEPT [8 BIT] (TT INT)	THE TIME REMAINING UNTIL THE ADDRESSEE TN WILL COMPLETE THE INTERCEPT.	J12.1E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 018 ----- 0 THROUGH 31 SECONDS	0 THROUGH 31	IN ONE SECOND INCREMENTS.
----- FOR DUI 019 ----- 0 THROUGH 6.55 MILLISECONDS	0 THROUGH 524287	IN 12.5 NANOSECOND INCREMENTS. CODED WITH THE LEAST SIGNIFICANT BIT IN BIT POSITION 18.
----- FOR DUI 023 ----- 0 THROUGH 254 SECONDS NO STATEMENT	0 THROUGH 254 255	IN ONE SECONDS INCREMENTS.

DFI NAME DEFINITION
389 ORDER SPECIFIES THE ORDER TO BE CARRIED OUT IN RESPONSE TO THE
AIRCRAFT CONTROL MESSAGE.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
002 REQUEST FOR ASSUME CONTROL [3 BIT]		J10.3I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 002 -----		
HANDOVER REQUEST	0	REQUEST ADDRESSEE TN ASSUME CONTROL OF THE REFERENCE TN AIRCRAFT. IF THE OBJECTIVE TN IS NOT ZERO, THE REFERENCE TN IS PAIRED TO IT.
HANDOVER REQUEST	1	REQUEST ADDRESSEE TN ASSUME CONTROL OF THE REFERENCE TN AIRCRAFT. THE REFERENCE TN AIRCRAFT IS INVESTIGATING, ENGAGED TO, SHADOWING, INTERVENING, OR COVERING THE OBJECTIVE TN.
REQUEST FOR TRANSFER OF CONTROL	2	SOURCE TN REQUESTS TRANSFER OF CONTROL OF THE REFERENCE TN TO THE SOURCE TN.
UNDEFINED	3 THROUGH 7	

DFI	NAME	DEFINITION
390	INITIATE/CANCEL ACTION INDICATOR	AN INDICATION THAT THE ACTION IN THE MESSAGE IS TO BE INITIATED OR CANCELLED.

DATA STANDARD USAGE: Link 16	STATUS:
------------------------------	---------

DUI NAME	EXPLANATION	APPLICABILITY
003 CANCELLATION INDICATOR [1 BIT] (CI)	A HANDOVER REQUEST CAN BE CANCELLED BY SETTING THIS BIT.	J10.3I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 003 -----		
NO STATEMENT	0	
CANCEL HANDOVER REQUEST	1	

DFI NAME DEFINITION
391 ALERT CONDITION SPECIFIES THE GENERAL PREVAILING OPERATIONAL CONDITION OF
ENEMY IMPENDING THREAT.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
002 THREAT WARNING CONDITION [2 BIT] (TW CON)	DESCRIBES THE GENERAL PREVAILING OP- ERATIONAL CONDITION OF ENEMY IM- PENDING THREAT IN TERMS OF COLOR CODES.	J9.0I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 002 -----		
NO STATEMENT	0	
WHITE	1	
YELLOW	2	
RED	3	

DFI	NAME	DEFINITION
392	RECEIPT/COMPLIANCE	THE RECEIPT/COMPLIANCE (R/C) FIELD IS USED IN MESSAGES THAT ARE SUBJECT TO MACHINE AND/OR OPERATOR ACKNOWLEDGEMENT. THIS FIELD EXPRESSES THE CONTROL DATA FOR THE ACKNOWLEDGEMENT FUNCTIONS, IDENTIFIES MESSAGES AS EITHER ORIGINAL OR RESPONSE MESSAGES, AND CONVEYS THE MACHINE AND OPERATOR RESPONSES TO THE RECEIPT OF ORIGINAL MESSAGES.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
008 RECEIPT/COMPLIANCE [5 BIT]		J0.3I J0.4I J0.6I J1.4I J1.5I J1.6I J8.0I J9.0I J9.1I J10.3I J12.0I J12.1E0 J12.4I J14.2I J31.0I J31.1I
DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 008 -----		
ORIGINAL ORDER	0	RECEIPT/COMPLIANCE RESPONSE REQUIRED.
ORIGINAL ORDER	1	RECEIPT/COMPLIANCE RESPONSE NOT REQUIRED. MUST BE USED IN CONJUNCTION WITH ORIGINAL ORDER MESSAGES ADDRESSED TO COLLECTIVE ADDRESSES. THE ORIGINAL ORDER SHALL BE TRANSMITTED 3 TIMES.
MACHINE RECEIPT	2	MESSAGE RECEIVED ERROR FREE.
WILCO (WILL COMPLY)	3	THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER WILL COMPLY. IN THIS USAGE, THE SYSTEM COMPONENT IS A HUMAN OPERATOR OR (UNMANNED VEHICLE ONLY) A MACHINE.
HAVCO (HAVE COMPLIED)	4	THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER HAS COMPLIED. IN THIS USAGE, THE SYSTEM COMPONENT MAY BE A HUMAN OPERATOR OR A MACHINE.
ORIGINAL ORDER	5	RECEIPT/COMPLIANCE RESPONSE (MR AND/OR CANTPRO ONLY) REQUIRED.
CANTCO (CANNOT COMPLY)	6	THE SYSTEM COMPONENT REQUIRED TO TAKE ACTION UNDER THIS ORDER

DFI NAME
392 RECEIPT/COMPLIANCE

DATA ITEM (CONTINUED) (CONTINUED)	BIT CODE	EXPLANATION
CANTPRO (CANNOT PROCESS)	7	CANNOT COMPLY. IN THIS USAGE, THE SYSTEM COMPONENT IS A HUMAN OPERATOR OR (UNMANNED VEHICLE ONLY) A MACHINE. NON-SPECIFIC SYSTEM LIMITATION OR CONFLICT. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
CANTPRO (CANNOT PROCESS)	8	TIME SLOT ASSIGNMENT CONFLICT DETECTED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
CANTPRO (CANNOT PROCESS)	9	CRYPTOVARIABLE NOT HELD. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
CANTPRO (CANNOT PROCESS)	10	PARTICIPATION GROUP NOT DEFINED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
CANTPRO (CANNOT PROCESS)	11	APPLICABLE ASSIGNMENT TABLE FULL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
CANTPRO (CANNOT PROCESS)	12	RELAY FUNCTION SPECIFIED ALREADY HAS ASSIGNED TIME SLOT BLOCKS FOR WHICH A DIFFERENT RELAY MODE/NET

APPENDIX B

DFI NAME
392 RECEIPT/COMPLIANCE

DATA ITEM (CONTINUED) (CONTINUED)	BIT CODE	EXPLANATION
CANTPRO (CANNOT PROCESS)	13	NUMBER HAS BEEN SPECIFIED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED. INTERFERENCE PROTECTION FEATURES WOULD BE VIOLATED BY ACCEPTANCE OF ASSIGNMENT. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
CANTPRO (CANNOT PROCESS)	14	HOST SUBSCRIBER INTERFACE IS INACTIVE AND MESSAGE IS NOT PROCESSED BY THE TERMINAL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
CANTPRO (CANNOT PROCESS)	15	TN, ADDRESSEE DOES NOT IMPLEMENT THE ACTION REQUESTED. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
CANTPRO (CANNOT PROCESS)	16	ONE OR MORE TNS IN THE OM NOT HELD. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
CANTPRO (CANNOT PROCESS)	17	TN, REFERENCE OR TN, FRIENDLY WEAPON IS UNDER OWN UNIT CONTROL. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN

DFI NAME
392 RECEIPT/COMPLIANCE

DATA ITEM (CONTINUED) (CONTINUED)	BIT CODE	EXPLANATION
CANTPRO (CANNOT PROCESS)	18	RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED. UNIT NOT EXERCISING AIR CONTROL CAPABILITY. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
CANTPRO (CANNOT PROCESS)	19	UNACCEPTABLE IDENTITY. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
CANTPRO (CANNOT PROCESS)	20	ADDRESSEE TN IS INACTIVE. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
CANTPRO (CANNOT PROCESS)	21	THE FORWARDING UNIT DID NOT RECEIVE A MACHINE RECEIPT FROM THE ADDRESSEE TN. THIS IS AN AUTOMATIC COMPUTER-GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
CANTPRO (CANNOT PROCESS)	22	TN, REFERENCE OR TN, FRIENDLY WEAPON IS NOT UNDER THIS UNIT'S CONTROL. THIS IS AN AUTOMATIC COMPUTER- GENERATED RESPONSE AND THE OPERATOR NEED NOT BE AWARE THAT ANY ORDER HAS BEEN RECEIVED OR THAT THE CANTPRO RESPONSE HAS BEEN GENERATED.
UNDEFINED NO STATEMENT	23 THROUGH 30 31	

DFI NAME DEFINITION
394 WEAPON/ENGAGEMENT STATUS PROVIDES ENGAGEMENT STATUS ON A TRACK.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
005 AIR WEAPON/ENGAGEMENT STATUS, B [4 BIT]	PROVIDES THE ENGAGEMENT STATUS OF A PARTICULAR AIR COMBAT WEAPON AGAINST AN OBJECTIVE.	J10.2C1
007 AIR WEAPON/ENGAGEMENT STATUS, A [4 BIT]	PROVIDES THE ENGAGEMENT STATUS OF A PARTICULAR AIR COMBAT WEAPON AGAINST AN OBJECTIVE.	J10.2C1
009 WEAPON ENGAGEMENT STATUS [4 BIT]	PROVIDES THE ENGAGEMENT STATUS OF A WEAPON AGAINST AN OBJECTIVE.	J10.2I J12.6C1

DATA ITEM BIT CODE EXPLANATION

----- FOR DUIS 005, 007, AND 009 -----

NO STATEMENT	0	
RECOMMEND REATTACK	1	THE REFERENCE TN HAS COMPLETED ITS MISSION AGAINST THE TARGET AND RECOMMENDS ANOTHER ASO MISSION BE CONDUCTED AGAINST THE SAME TARGET.
WEAPON ASSIGNED	2	THE SPECIFIED WEAPON REPORTED IN THE WEAPON SYSTEM FIELD HAS BEEN ALLOCATED TO THE TARGET.
TRACKING/LOCKED ON/READY TO FIRE/BIRD AFFIRM	3	THE REFERENCE TN'S TRACKING RADAR IS LOCKED ON TO THE TARGET. UNIT IS READY TO FIRE AS SOON AS THE TARGET IS WITHIN WEAPON RANGE AND THE TARGET IS ELIGIBLE FOR DESTRUCTION.
FIRING/MISSILE IN FLIGHT/ENGAGING TO DESTROY	4	(A.) MISSILE: IF THE WEAPON SYSTEM IS ANY MISSILE, THE REFERENCE TN'S MISSILE HAS BEEN LAUNCHED AND IS ENROUTE TO THE TARGET. (B.) AIRCRAFT: IF WEAPON SYSTEM IS ANY AIRCRAFT, THE REFERENCE TN IS ENGAGING THE TARGET WITH INTENTION TO DESTROY.
EFFECTIVE/TARGET DESTROYED/GRAND SLAM	5	THE TARGET HAS BEEN ENGAGED BY THE REFERENCE TN AND IS NO LONGER A

DFI NAME
394 WEAPON/ENGAGEMENT STATUS

DATA ITEM (CONTINUED) (CONTINUED)	BIT CODE	EXPLANATION
PARTIALLY EFFECTIVE	6	THREAT. THE ENGAGEMENT PREVIOUSLY REPORTED IS BROKEN. THIS VALUE IS TRANSMITTED UNTIL SENSOR CONTACT IS CANCELLED/LOST.
NOT EFFECTIVE	7	ALL TARGETS ASSOCIATED WITH THE TARGET TN HAVE NOT BEEN DESTROYED. THE ENGAGEMENT IS CONTINUING.
ENGAGEMENT BROKEN	8	MISS OR ABORT. THE TARGET IS NOT DESTROYED. THE ENGAGEMENT IS CONTINUING.
HEADS UP	9	THE REFERENCE TN IS TERMINATING THE ACTION PREVIOUSLY REPORTED OR ORDERED AGAINST THE TARGET.
ENGAGEMENT INTERRUPTED	10	THE TARGET CONSTITUTES A THREAT TO FRIENDLY FORCES. THE SOURCE TN IS UNABLE TO ASSURE COMPLETE DESTRUCTION OF THE TARGET. THE REFERENCE TN WILL BE SET TO THE TN OF THE SOURCE OR ONE OF ITS SUPPORTING UNITS. THIS VALUE DOES NOT REPORT EITHER AN ENGAGEMENT OR A BREAKING OF AN ENGAGEMENT. THE WEAPON SYSTEM FIELD IS SET TO NO STATEMENT FOR THIS VALUE.
INVESTIGATING/ INTERROGATING	11	THIS VALUE IS DEFINED AS A NATO NATION NATIONAL REQUIREMENT. U.S. SYSTEMS WILL NOT ORIGINATE THIS STATUS VALUE, AND WHEN RECEIVING THE VALUE, U.S. SYSTEMS WILL INTERPRET AS ENGAGEMENT BROKEN (VALUE 8).

DFI NAME
394 WEAPON/ENGAGEMENT STATUS

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
SHADOWING	12	THE REFERENCE TN IS MAINTAINING SURVEILLANCE ON A DESIGNATED TARGET.
INTERVENING	13	THE REFERENCE TN IS TAKING ACTION TO DIVERT A DESIGNATED TARGET FROM ITS INTENDED FLIGHT PATH.
COVERING	14	THE REFERENCE TN IS MAINTAINING A POSITION RELATIVE TO A DESIGNATED TARGET FROM WHICH A SUCCESSFUL INTERCEPT CAN TAKE EFFECT IF NEEDED.
BATTLE DAMAGE ASSESSMENT UNKNOWN	15	THE REFERENCE TN HAS COMPLETED ITS MISSION AGAINST THE TARGET AND REPORTS AN UNKNOWN BATTLE DAMAGE ASSESSMENT.

DFI NAME DEFINITION
395 PERIMETER ENGAGEMENT STATUS

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 PERIMETER ENGAGEMENT STATUS [1 BIT] (PES)	INDICATES WHETHER THE SYSTEM IS INITIATING MULTIPLE SIMULTANEOUS ENGAGEMENTS.	J13.5I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
OFF	0	THE REFERENCE TN IS NOT/OR IS NO LONGER INITIATING MULTIPLE SIMULTANEOUS ENGAGEMENTS.
ON	1	THE REFERENCE TN IS INITIATING MULTIPLE SIMULTANEOUS ENGAGEMENTS WITH NO CAPABILITY TO PERFORM INDEPENDENT KILL ASSESSMENT, BUT WILL TRANSMIT W/ES OF FIRING AND ENGAGEMENT BROKEN FOR EACH MISSILE/TARGET PAIR.

DFI	NAME	DEFINITION
396	NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE	THE NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 1 [4 BIT]	USED IN CONJUNCTION WITH THE MISSILE TYPE FIELD IT AMPLIFIES. SPECIFIES THE NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE FOR THE MISSILE TYPE SPECIFIED.	J13.3C1
002 NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 2 [4 BIT]	USED IN CONJUNCTION WITH THE MISSILE TYPE FIELD IT AMPLIFIES. SPECIFIES THE NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE FOR THE MISSILE TYPE SPECIFIED.	J13.3C1
003 NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 3 [4 BIT]	USED IN CONJUNCTION WITH THE MISSILE TYPE FIELD IT AMPLIFIES. SPECIFIES THE NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE FOR THE MISSILE TYPE SPECIFIED.	J13.3C1
004 NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 4 [4 BIT]	USED IN CONJUNCTION WITH THE MISSILE TYPE FIELD IT AMPLIFIES. SPECIFIES THE NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE FOR THE MISSILE TYPE SPECIFIED.	J13.3C5
005 NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 5 [4 BIT]	USED IN CONJUNCTION WITH THE MISSILE TYPE FIELD IT AMPLIFIES. SPECIFIES THE NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE FOR THE MISSILE TYPE SPECIFIED.	J13.3C5
006 NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 6 [4 BIT]	USED IN CONJUNCTION WITH THE MISSILE TYPE FIELD IT AMPLIFIES. SPECIFIES THE NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE FOR THE MISSILE TYPE SPECIFIED.	J13.3C5

B-308

APPENDIX B

MIL-STD-6016B

APPENDIX B

DFI NAME
396 NUMBER OF FIRE CONTROL SYSTEMS
AVAILABLE

DUI NAME	EXPLANATION	APPLICABILITY
007 NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 7 [4 BIT]	USED IN CONJUNCTION WITH THE MISSILE TYPE FIELD IT AMPLIFIES. SPECIFIES THE NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE FOR THE MISSILE TYPE SPECIFIED.	J13.3C6
008 NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 8 [4 BIT]	USED IN CONJUNCTION WITH THE MISSILE TYPE FIELD IT AMPLIFIES. SPECIFIES THE NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE FOR THE MISSILE TYPE SPECIFIED.	J13.3C6
009 NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 9 [4 BIT]	USED IN CONJUNCTION WITH THE MISSILE TYPE FIELD IT AMPLIFIES. SPECIFIES THE NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE FOR THE MISSILE TYPE SPECIFIED.	J13.3C6
010 NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 10 [4 BIT]	USED IN CONJUNCTION WITH THE MISSILE TYPE FIELD IT AMPLIFIES. SPECIFIES THE NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE FOR THE MISSILE TYPE SPECIFIED.	J13.3C7
011 NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 11 [4 BIT]	USED IN CONJUNCTION WITH THE MISSILE TYPE FIELD IT AMPLIFIES. SPECIFIES THE NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE FOR THE MISSILE TYPE SPECIFIED.	J13.3C7
012 NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 12 [4 BIT]	USED IN CONJUNCTION WITH THE MISSILE TYPE FIELD IT AMPLIFIES. SPECIFIES THE NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE FOR THE MISSILE TYPE SPECIFIED.	J13.3C7

DFI NAME
396 NUMBER OF FIRE CONTROL SYSTEMS
AVAILABLE

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001-012 -----		
0 THROUGH 13 SYSTEMS	0 THROUGH 13	IN INCREMENTS OF ONE.
GREATER THAN 13 SYSTEMS	14	
NO STATEMENT	15	

DFI NAME DEFINITION
398 COMMAND INDICATES WEAPON SYSTEM ENGAGEMENT FOR AIR DEFENSE AND DIRECTS
ASW OPERATIONS.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME EXPLANATION APPLICABILITY

003 COMMAND EXPRESSES WEAPON ENGAGEMENT COMMANDS J9.0I
[5 BIT] FOR AIR DEFENSE.

DATA ITEM BIT CODE EXPLANATION

----- FOR DUI 003 -----

WEAPONS FREE	0	FIRE ONLY AT TARGETS NOT RECOGNIZED AS FRIENDLY IN ACCORDANCE WITH CURRENT RULES OF ENGAGEMENT. COMMAND IS USED TO DISSEMINATE AN AREA/SECTOR WEAPONS RELEASE CONDITION.
WEAPONS TIGHT	1	FIRE ONLY AT TARGETS POSITIVELY IDENTIFIED AS HOSTILE IN ACCORDANCE WITH CURRENT RULES OF ENGAGEMENT. COMMAND IS USED TO DISSEMINATE AN AREA/SECTOR WEAPONS RELEASE CONDITION.
ENGAGE	2	ENGAGE THE TARGET SPECIFIED IN OBJECTIVE TN TO DESTRUCTION WITH WEAPON SPECIFIED IN WEAPON TYPE AND WHOSE TRACK NUMBER IS INDICATED IN FRIENDLY WEAPON TN. IF WEAPON TYPE IS ANY/ALL, PERFORM THOSE FUNCTIONS SPECIFIED FOR WEAPON SELECTED.
ASSIGN	3	PERFORM ALL FUNCTIONS OF ENGAGEMENT OF OBJECTIVE TN BUT DO NOT FIRE UNTIL ORDERED OR OBJECTIVE TN BECOMES ELIGIBLE FOR DESTRUCTION UNDER EXISTING DOCTRINE AND/OR RULES OF ENGAGEMENT. THE WEAPON SYSTEM TO BE USED IS SPECIFIED IN FRIENDLY WEAPON TN AND/OR WEAPON TYPE FIELD(S). IF WEAPON TYPE IS ANY/ALL, PERFORM THOSE FUNCTIONS SPECIFIED FOR THE WEAPON SELECTED.

B-311

MIL-STD-6016B
APPENDIX B

DFI NAME
398 COMMAND

DATA ITEM (CONTINUED)
CEASE ENGAGE

BIT CODE
4

EXPLANATION
BREAK THE ENGAGEMENT ON THE TARGET SPECIFIED IN OBJECTIVE TN WITH THE WEAPON SYSTEM SPECIFIED IN WEAPON TYPE AND WHOSE TRACK NUMBER IS INCLUDED IN FRIENDLY WEAPON TN. IF WEAPON TYPE IS MISSILE/CONVENTIONAL, DO NOT FIRE AT TARGET SPECIFIED IN OBJECTIVE TN. IF FIRING HAS OCCURRED, PERMIT MISSILES IN FLIGHT TO CONTINUE TO INTERCEPT. IF WEAPON TYPE IS ANY/ALL, AND FRIENDLY WEAPON TN=0, ALL WEAPONS EMPLOYED AGAINST OBJECTIVE TN ARE INDICATED.

HOLD FIRE

5

EMERGENCY ORDER. IF WEAPON TYPE IS MISSILE/CONVENTIONAL, DO NOT FIRE AT TARGET SPECIFIED IN OBJECTIVE TN. IF FIRING HAS OCCURRED, DESTROY THE MISSILES IN FLIGHT. IF WEAPON TYPE IS AIRCRAFT, DISCONTINUE THE INTERCEPT. IF WEAPON TYPE IS ANY/ALL, TAKE ACTION SPECIFIED FOR WEAPON BEING EMPLOYED.

CEASE FIRE

6

IF WEAPON TYPE IS MISSILE/CONVENTIONAL, DO NOT FIRE AT TARGET SPECIFIED IN OBJECTIVE TN. IF FIRING HAS OCCURRED, PERMIT MISSILES IN FLIGHT TO CONTINUE TO INTERCEPT. IF WEAPON TYPE IS AIRCRAFT, DISCONTINUE THE INTERCEPT. IF WEAPON TYPE IS ANY/ALL TAKE ACTION SPECIFIED FOR THE WEAPON BEING EMPLOYED.

COVER

7

ADDRESSEE TN COVER OBJECTIVE TN. OBJECTIVE TN IS ENGAGED BY ANOTHER WEAPON SYSTEM OR HAS NOT YET BECOME A "SIGNIFICANT" THREAT. ADDRESSEE TN ASSUME POSTURE THAT WILL ALLOW ENGAGEMENT OF OBJECTIVE TN IF DIRECTED.

APPENDIX B

MIL-STD-6016B

DFI NAME
398 COMMAND

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
SALVO/CLEAR AIRCRAFT	8	ADDRESSEE TN CLEAR FRIENDLY WEAPON TN FROM VICINITY OF OBJECTIVE TN. IF ADDRESSEE TN IS COLLECTIVE ADDRESS 00177, ALL UNITS CLEAR ALL FRIENDLY WEAPON PLATFORMS FROM VICINITY OF OBJECTIVE TN.
ASSUME CONTROL	9	IF FRIENDLY WEAPON TN=0, ADDRESSEE TN ASSUME CONTROL OF OBJECTIVE TN. IF FRIENDLY WEAPON TN IS NOT EQUAL TO 0, ADDRESSEE TN DIRECT FRIENDLY WEAPON TN TO ASSUME CONTROL OF OBJECTIVE TN.
ATTACK	10	IF FRIENDLY WEAPON TN=0, ADDRESSEE TN DIRECT ALL WEAPONS TO ATTACK. IF FRIENDLY WEAPON TN IS NOT =0, ADDRESSEE TN DIRECT FRIENDLY WEAPON TN TO ATTACK OBJECTIVE TN.
CEASE ATTACK	11	IF FRIENDLY WEAPON TN=0, ADDRESSEE TN DIRECT ALL FRIENDLY WEAPONS TO CEASE ATTACK. IF FRIENDLY WEAPON TN IS NOT =0, ADDRESSEE TN DIRECT FRIENDLY WEAPON TN TO CEASE ATTACK.
DISUSED PROCEED TO POINT	12 THROUGH 13 14	IF FRIENDLY WEAPON TN=0, ADDRESSEE TN PROCEED TO POINT DESIGNATED BY OBJECTIVE TN. IF FRIENDLY WEAPON TN IS NOT EQUAL TO 0, ADDRESSEE TN DIRECT FRIENDLY WEAPON TN TO PROCEED TO POINT DESIGNATED BY OBJECTIVE TN.
CEASE PROCEEDING TO POINT	15	IF FRIENDLY WEAPON TN=0, ADDRESSEE TN CEASE PROCEEDING TO POINT DESIGNATED BY OBJECTIVE TN. IF FRIENDLY WEAPON TN IS NOT EQUAL TO 0, ADDRESSEE TN DIRECT FRIENDLY WEAPON TN TO CEASE PROCEEDING TO POINT DESIGNATED BY OBJECTIVE TN.
CONDUCT PROCEDURES INDICATED	16	IF FRIENDLY WEAPON TN=0, ADDRESSEE TN CONDUCT PROCEDURES INDICATED BY COMMAND MISSION. IF FRIENDLY

APPENDIX B

DFI NAME
398 COMMAND

DATA ITEM (CONTINUED) (CONTINUED)	BIT CODE	EXPLANATION
CEASE CONDUCTING PROCEDURES INDICATED	17	WEAPON TN IS NOT EQUAL TO 0, ADDRESSEE TN DIRECT FRIENDLY WEAPON TN TO CONDUCT PROCEDURES INDICATED BY COMMAND MISSION. IF FRIENDLY WEAPON TN=0, ADDRESSEE TN CEASE CONDUCTING PROCEDURES INDICATED BY COMMAND MISSION. IF FRIENDLY WEAPON TN IS NOT EQUAL TO 0, ADDRESSEE TN DIRECT FRIENDLY WEAPON TN TO CEASE CONDUCTING PROCEDURES INDICATED BY COMMAND MISSION.
ASSUME DUTIES INDICATED	18	IF FRIENDLY WEAPON TN=0, ADDRESSEE TN ASSUME DUTIES INDICATED IN THE DUTY ASSIGNMENT FUNCTIONAL AREA/ DUTY ASSIGNMENT FIELDS. IF FRIENDLY WEAPON TN IS NOT EQUAL TO 0, ADDRESSEE TN DIRECT FRIENDLY WEAPON TN TO ASSUME DUTIES INDICATED IN THE DUTY ASSIGNMENT FUNCTIONAL AREA/DUTY ASSIGNMENT FIELDS.
CEASE DUTIES INDICATED	19	IF FRIENDLY TN=0, ADDRESSEE TN CEASE PERFORMANCE OF DUTIES INDICATED IN THE DUTY ASSIGNMENT FUNCTIONAL AREA/DUTY ASSIGNMENT FIELDS. IF FRIENDLY WEAPON TN IS NOT EQUAL TO 0, ADDRESSEE TN DIRECT FRIENDLY WEAPON TN TO CEASE PERFORMANCE OF DUTIES INDICATED IN THE DUTY ASSIGNMENT FUNCTIONAL AREA/DUTY ASSIGNMENT FIELDS.
TRANSFER CONTROL	20	ADDRESSEE TN TRANSFER CONTROL OF FRIENDLY WEAPON TN TO OBJECTIVE TN.
RETURN TO BASE	21	IF FRIENDLY WEAPON TN=0, ADDRESSEE TN RETURN TO BASE WHICH IS OBJECTIVE TN. IF FRIENDLY WEAPON TN IS NOT EQUAL TO 0, ADDRESSEE TN DIRECT FRIENDLY WEAPON TN TO RETURN TO BASE WHICH IS OBJECTIVE

DFI NAME
398 COMMAND

DATA ITEM (CONTINUED) (CONTINUED)	BIT CODE	EXPLANATION
LAUNCH ALERT AIRCRAFT	22	TN. IF OBJECTIVE TN=0, BASE IS NOT SPECIFIED. IF FRIENDLY WEAPON TN=0, ADDRESSEE TN LAUNCH ALERT AIRCRAFT TO OBJECTIVE TN. IF FRIENDLY WEAPON TN IS NOT EQUAL TO 0, ADDRESSEE TN TO DIRECT FRIENDLY WEAPON TN TO LAUNCH ALERT AIRCRAFT TO OBJECTIVE TN. OBJECTIVE TN MAY DESIGNATE A TARGET, POINT, OR AIRCRAFT CONTROLLER.
INVESTIGATE/INTERROGATE	23	ENGAGE THE TARGET SPECIFIED IN OBJECTIVE TN WITH THE AIRCRAFT WHOSE TRACK NUMBER IS SPECIFIED IN FRIENDLY WEAPON TN. DO NOT FIRE ON OBJECTIVE TN UNTIL ORDERED, OR OBJECTIVE TN BECOMES ELIGIBLE FOR DESTRUCTION UNDER EXISTING DOCTRINE AND/OR RULES OF ENGAGEMENT. IF FRIENDLY WEAPON TN=0, AIRCRAFT IS NOT SPECIFIED.
INTERVENE	24	ADDRESSEE TN ORDER AIRCRAFT INDICATED IN FRIENDLY WEAPON TN TO TAKE ACTION TO DIVERT TARGET DESIGNATED BY OBJECTIVE TN FROM ITS INTENDED FLIGHT PATH. IF FRIENDLY WEAPON TN=0, AIRCRAFT IS NOT SPECIFIED.
SHADOW	25	ADDRESSEE TN ORDER PLATFORM INDICATED IN FRIENDLY WEAPON TN TO MAINTAIN SURVEILLANCE ON TARGET DESIGNATED BY OBJECTIVE TN. IF FRIENDLY WEAPON TN=0, PLATFORM IS NOT SPECIFIED.
UNDEFINED	26	
ENGAGE TN OBJECTIVE WITH SPECIFIED NUMBER OF ASM/SSM TO MEET IMPACT TIME INDICATED	27	IF FRIENDLY WEAPON TN=0, ADDRESSEE TN ENGAGE THE TARGET SPECIFIED IN OBJECTIVE TN WITH THE NUMBER OF MISSILES SPECIFIED TO MEET IMPACT TIME INDICATED IN HOUR/MINUTE/SECOND FIELDS. IF FRIENDLY WEAPON

DFI NAME
398 COMMAND

DATA ITEM (CONTINUED) (CONTINUED)	BIT CODE	EXPLANATION TN NOT = 0, ADDRESSEE TN DIRECT FRIENDLY WEAPON TN TO ENGAGE OBJECTIVE TN WITH NUMBER OF MISSILES SPECIFIED TO MEET IMPACT TIME INDICATED.
PRIORITY KILL	28	ORDERS A HIGH PRIORITY ON THE DESTRUCTION OF A SPECIFIC AIR TARGET FIRST.
UNDEFINED	29 THROUGH 31	

DFI	NAME	DEFINITION
399	UNIT CAPABILITY/WEAPON TYPE	INDICATES THE SPECIFIC WEAPON SYSTEM TO BE USED IN ENGAGING A TARGET OR THE SPECIFIC WEAPON CAPABILITY OF A UNIT.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
003 WEAPON TYPE [2 BIT]	INDICATES THE WEAPON SYSTEM TO BE USED IN ENGAGING A TARGET.	J9.0I
004 MISSILE TYPE, 1 [6 BIT]	INDICATES THE TYPE OF MISSILE BEING REPORTED.	J13.3C1 J13.4C1
005 MISSILE TYPE, 2 [6 BIT]	INDICATES THE TYPE OF MISSILE BEING REPORTED.	J13.3C1 J13.4C1
006 MISSILE TYPE, 3 [6 BIT]	INDICATES THE TYPE OF MISSILE BEING REPORTED.	J13.3C1 J13.4C1
007 MISSILE TYPE, 4 [6 BIT]	INDICATES THE TYPE OF MISSILE BEING REPORTED.	J13.3C5
008 MISSILE TYPE, 5 [6 BIT]	INDICATES THE TYPE OF MISSILE BEING REPORTED.	J13.3C5
009 MISSILE TYPE, 6 [6 BIT]	INDICATES THE TYPE OF MISSILE BEING REPORTED.	J13.3C5
010 MISSILE TYPE, 7 [6 BIT]	INDICATES THE TYPE OF MISSILE BEING REPORTED.	J13.3C6
011 MISSILE TYPE, 8 [6 BIT]	INDICATES THE TYPE OF MISSILE BEING REPORTED.	J13.3C6
012 MISSILE TYPE, 9 [6 BIT]	INDICATES THE TYPE OF MISSILE BEING REPORTED.	J13.3C6
013 MISSILE TYPE, 10 [6 BIT]	INDICATES THE TYPE OF MISSILE BEING REPORTED.	J13.3C7
014 MISSILE TYPE, 11 [6 BIT]	INDICATES THE TYPE OF MISSILE BEING REPORTED.	J13.3C7
015 MISSILE TYPE, 12 [6 BIT]	INDICATES THE TYPE OF MISSILE BEING REPORTED.	J13.3C7

DFI NAME
399 UNIT CAPABILITY/WEAPON TYPE

DUI NAME	EXPLANATION	APPLICABILITY
016 TORPEDO TYPE, 1 [4 BIT]	INDICATES TYPE OF TORPEDO BEING REPORTED.	J13.4C1
017 TORPEDO TYPE, 2 [4 BIT]	INDICATES TYPE OF TORPEDO BEING REPORTED.	J13.4C1
018 THREAT WEAPON [5 BIT]	INDICATES THE TYPE OF WEAPON THE THREAT INTENDS TO USE AGAINST THE TARGETED TN.	J6.0C1 J15.0I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 003 -----		
ANY/ALL WEAPON SYSTEMS	0	
AIRCRAFT	1	
MISSILE	2	
CONVENTIONAL	3	
----- FOR DUIS 004-015 -----		
NO STATEMENT	0	
SHORT RANGE SAM	1	RANGE LESS THAN 10 NM.
MEDIUM RANGE SAM	2	RANGE 10-50 NM.
LONG RANGE SAM	3	RANGE GREATER THAN 50 NM.
SHORT RANGE SSM	4	RANGE LESS THAN 15 NM.
MEDIUM RANGE SSM	5	RANGE 15-75 NM.
LONG RANGE SSM	6	RANGE GREATER THAN 75 NM.
UNDEFINED	7	
SM2(ER)	8	A LONG RANGE SAM.
SM2(MR)	9	A MEDIUM RANGE SAM.
SM1(ER)	10	A MEDIUM RANGE SAM.
SM1(MR)	11	A MEDIUM RANGE SAM.
EXTENDED RANGE SAM (SHORT)	12	RANGE 51 THROUGH 99 NM.
EXTENDED RANGE SAM (MEDIUM)	13	RANGE 100 THROUGH 150 NM.
EXTENDED RANGE SAM (LONG)	14	RANGE GREATER THAN 150 NM.
EXTENDED RANGE SSM (SHORT)	15	RANGE 76 THROUGH 199 NM.

DFI NAME
399 UNIT CAPABILITY/WEAPON TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
EXTENDED RANGE SSM (MEDIUM)	16	RANGE 200 THROUGH 300 NM.
EXTENDED RANGE SSM (LONG)	17	RANGE GREATER THAN 300 NM.
SM2 BLOCK II	18	AN EXTENDED RANGE SAM (SHORT).
SM2 BLOCK III	19	AN EXTENDED RANGE SAM (SHORT).
SM2 BLOCK IIIA	20	AN EXTENDED RANGE SAM (SHORT).
SM2 BLOCK IIIB	21	AN EXTENDED RANGE SAM (SHORT).
SM2 BLOCK IV	22	AN EXTENDED RANGE SAM (MEDIUM).
SM2 BLOCK IVA	23	AN ANTI-THEATER BALLISTIC MISSILE (TBM) CAPABLE EXTENDED RANGE SAM (LONG).
TOMAHAWK (TASM)	24	A LONG RANGE SSM TACTICAL ANTI-SHIP MISSILE.
TOMAHAWK (TLAM C)	25	A LONG RANGE SSM TACTICAL LAND ATTACK MISSILE CONVENTIONAL.
HARPOON	26	A MEDIUM RANGE SSM.
SM3 (LEAP)	27	LIGHT EXOATMOSPHERIC PROJECTILE - AN ANTI-TBM MISSILE (EXTENDED RANGE (LONG)).
UNDEFINED MISSILE 1 THROUGH 7	28 THROUGH 56 57 THROUGH 63	AS SPECIFIED BY THE OPERATIONAL COMMANDER.
----- FOR DUIS 016-017 -----		
NO STATEMENT	0	
TORPEDO 1 THROUGH 4	1 THROUGH 4	SPECIFIC TORPEDO DESIGNATION AS SPECIFIED BY OPERATIONAL COMMANDER.
UNDEFINED	5 THROUGH 15	
----- FOR DUI 018 -----		
NO STATEMENT	0	
HEAT AIR-TO-AIR MISSILE	1	
RADAR AIR-TO-AIR MISSILE	2	
ACTIVE AIR-TO-AIR MISSILE	3	A MISSILE NOT REQUIRING CONTINUAL DATA LINK WITH ITS LAUNCHING PLATFORM.

DFI NAME
399 UNIT CAPABILITY/WEAPON TYPE

DATA ITEM (CONTINUED)
ANTI-RADIATION MISSILE
(HARM)
UNDEFINED

BIT CODE
4
5 THROUGH 31

EXPLANATION

DFI NAME DEFINITION
400 PAIRING ACTION INDICATES A PAIRING (NOT ENGAGEMENT STATUS) OR ASSOCIATION OF DATA BETWEEN TWO TRACKS OR A TRACK AND A POINT.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
002 PAIRING ACTION [4 BIT]	INDICATES A PAIRING (NOT AN ENGAGEMENT) OR ASSOCIATION OF DATA BETWEEN A FRIENDLY TRACK AND ANOTHER TRACK OR POINT.	J10.6I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 002 -----		
UNDEFINED	0	
GENERAL PAIRING	1	
INTERDICTION PAIRING	2	
RENDEZVOUS PAIRING	3	
COMBAT AIR PATROL PAIRING	4	
CLOSE AIR SUPPORT PAIRING	5	
RETURN TO BASE PAIRING	6	
TANKER PAIRING	7	
UNDEFINED	8 THROUGH 14	
TERMINATE PAIRING	15	

B-321

MIL-STD-6016B
APPENDIX B

DFI NAME
401 THREAT POSTURE

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 THREAT POSTURE [3 BIT]	DESCRIBES THE CURRENT POSTURE OF A KNOWN THREAT.	J15.0I

DATA ITEM	BIT CODE	EXPLANATION
-----------	----------	-------------

----- FOR DUI 001 -----

DISUSED	0	
SEARCH/SURVEILLANCE	1	THE THREAT IS ATTEMPTING TO LOCATE/ IDENTIFY THE TARGETED/ADDRESSEE TN. IF THE TARGETED TN IS SET TO NO STATEMENT, THE ADDRESSEE TN IS THE OBJECT THAT THE THREAT TN IS TARGETED AGAINST.
READY TO LAUNCH/FIRE	2	THE THREAT IS PREPARING TO LAUNCH/ FIRE A WEAPON AT THE TARGETED/ ADDRESSEE TN. IF THE TARGETED TN IS SET TO NO STATEMENT, THE ADDRESSEE TN IS THE OBJECT THAT THE THREAT TN IS TARGETED AGAINST.
LAUNCHED/FIRED	3	THE THREAT HAS LAUNCHED/FIRED A WEAPON AT THE TARGETED/ADDRESSEE TN. IF THE TARGETED TN IS SET TO NO STATEMENT, THE ADDRESSEE TN IS THE OBJECT THAT THE THREAT TN IS TARGETED AGAINST.
UNKNOWN	4	THE POSTURE OF THE KNOWN THREAT IS UNKNOWN AT THE TIME OF THIS TRANSMISSION.
CANCEL	5	THE THREAT FROM THE THREAT TN TO THE ADDRESSEE/TARGETED TN IS CANCELLED.
DIRECTED TO ENGAGE	6	THE THREAT LIKELY HAS BEEN ORDERED TO ENGAGE THE TARGETED/ADDRESSEE TN. IF THE TARGETED TN IS SET TO NO STATEMENT, THE ADDRESSEE TN IS THE OBJECT THAT THE THREAT TN IS TARGETED AGAINST.
UNDEFINED	7	

B-322

MIL-STD-6016B
APPENDIX B

DFI	NAME	DEFINITION
408	WEAPON/SENSOR INVENTORY	INDICATES THE ESTIMATED AMOUNT OF ORDNANCE REMAINING ON AN AIRCRAFT OR WEAPON SYSTEM.

DATA STANDARD USAGE: Link 16

STATUS:

DUI	NAME	EXPLANATION	APPLICABILITY
005	CONVENTIONAL DEPTH BOMB INVENTORY [2 BIT] (NCD)	AN ESTIMATED AMOUNT OF CONVENTIONAL DEPTH BOMBS REMAINING ON AN AIRCRAFT OR WEAPON SYSTEM.	J13.2C3
006	SPECIAL DEPTH BOMB INVENTORY [2 BIT] (NSD)	AN ESTIMATED AMOUNT OF SPECIAL DEPTH BOMBS REMAINING ON AN AIRCRAFT OR WEAPONS SYSTEMS.	J13.2C3
007	CONVENTIONAL TORPEDO INVENTORY [2 BIT] (NCT)	AN ESTIMATED AMOUNT OF CONVENTIONAL TORPEDOES REMAINING ON A WEAPON SYSTEM.	J13.2C3
008	SPECIAL TORPEDO INVENTORY [2 BIT] (NST)	AN ESTIMATED AMOUNT OF SPECIAL TORPEDOES REMAINING ON A WEAPON SYSTEM.	J13.2C3
009	CONVENTIONAL MISSILE INVENTORY [2 BIT] (NCM)	AN ESTIMATED AMOUNT OF CONVENTIONAL MISSILES REMAINING ON A WEAPON SYSTEM.	J13.2C3
010	SPECIAL MISSILE INVENTORY [2 BIT] (NSM)	AN ESTIMATED AMOUNT OF SPECIAL MISSILES REMAINING ON A WEAPON SYSTEM.	J13.2C3
011	ROCKET INVENTORY [2 BIT] (NR)	AN ESTIMATED AMOUNT OF ROCKETS REMAINING ON A WEAPON SYSTEM.	J13.2C3
012	ACTIVE SONOBUOY INVENTORY [2 BIT] (NAS)	AN ESTIMATED AMOUNT OF ACTIVE SONOBUOYS REMAINING ON A WEAPON SYSTEM.	J13.2C3
013	PASSIVE SONOBUOY INVENTORY [2 BIT] (NPS)	AN ESTIMATED AMOUNT OF PASSIVE SONOBUOYS REMAINING ON A WEAPON SYSTEM.	J13.2C3
014	COLD INVENTORY [7 BIT]	AN ESTIMATED AMOUNT OF COLD MISSILES REMAINING ON A WEAPON SYSTEM.	J13.5C1

DFI NAME
408 WEAPON/SENSOR INVENTORY

DUI NAME	EXPLANATION	APPLICABILITY
015 HOT INVENTORY [7 BIT]	AN ESTIMATED AMOUNT OF HOT MISSILES REMAINING ON A WEAPON SYSTEM.	J13.5I
032 NUMBER OF STORES, 1 [6 BIT]	THE NUMBER OF A PARTICULAR TYPE OF STORES ON THE CONTROLLED AIRCRAFT.	J13.2C2
033 NUMBER OF STORES, 2 [6 BIT]	THE NUMBER OF A PARTICULAR TYPE OF STORES ON THE CONTROLLED AIRCRAFT.	J13.2C2
034 NUMBER OF STORES, 3 [6 BIT]	THE NUMBER OF A PARTICULAR TYPE OF STORES ON THE CONTROLLED AIRCRAFT.	J13.2C2
035 NUMBER OF STORES, 4 [6 BIT]	THE NUMBER OF A PARTICULAR TYPE OF STORES ON THE CONTROLLED AIRCRAFT.	J13.2C2
036 NUMBER OF STORES [6 BIT]	THE NUMBER OF A PARTICULAR TYPE OF STORES TO BE EXPENDED.	J12.0C4
037 OPERATIONAL MISSILE INVENTORY, 1 [7 BIT]	USED IN CONJUNCTION WITH THE MISSILE TYPE FIELD IT AMPLIFIES. AN ESTIMATED AMOUNT OF OPERATIONAL MISSILES OF THE SPECIFIED TYPE REMAINING ON THE WEAPON SYSTEM.	J13.3C1 J13.4C1
038 OPERATIONAL MISSILE INVENTORY, 2 [7 BIT]	USED IN CONJUNCTION WITH THE MISSILE TYPE FIELD IT AMPLIFIES. AN ESTIMATED AMOUNT OF OPERATIONAL MISSILES OF THE SPECIFIED TYPE REMAINING ON THE WEAPON SYSTEM.	J13.3C1 J13.4C1
039 OPERATIONAL MISSILE INVENTORY, 3 [7 BIT]	USED IN CONJUNCTION WITH THE MISSILE TYPE FIELD IT AMPLIFIES. AN ESTIMATED AMOUNT OF OPERATIONAL MISSILES OF THE SPECIFIED TYPE REMAINING ON THE WEAPON SYSTEM.	J13.3C1 J13.4C1
040 NUMBER OF STORES, 5 [6 BIT]	THE NUMBER OF A PARTICULAR TYPE OF STORES ON THE CONTROLLED AIRCRAFT.	J13.2C7
041 NUMBER OF STORES, 6 [6 BIT]	THE NUMBER OF A PARTICULAR TYPE OF STORES ON THE CONTROLLED AIRCRAFT.	J13.2C7

DFI NAME
408 WEAPON/SENSOR INVENTORY

DUI NAME	EXPLANATION	APPLICABILITY
042 NUMBER OF STORES, 7 [6 BIT]	THE NUMBER OF A PARTICULAR TYPE OF STORES ON THE CONTROLLED AIRCRAFT.	J13.2C7
043 NUMBER OF STORES, 8 [6 BIT]	THE NUMBER OF A PARTICULAR TYPE OF STORES ON THE CONTROLLED AIRCRAFT.	J13.2C7
044 OPERATIONAL MISSILE INVENTORY, 4 [7 BIT]	USED IN CONJUNCTION WITH THE MISSILE TYPE FIELD IT AMPLIFIES. AN ESTIMATED AMOUNT OF OPERATIONAL MISSILES OF THE SPECIFIED TYPE REMAINING ON THE WEAPON SYSTEM.	J13.3C5
045 OPERATIONAL MISSILE INVENTORY, 5 [7 BIT]	USED IN CONJUNCTION WITH THE MISSILE TYPE FIELD IT AMPLIFIES. AN ESTIMATED AMOUNT OF OPERATIONAL MISSILES OF THE SPECIFIED TYPE REMAINING ON THE WEAPON SYSTEM.	J13.3C5
046 OPERATIONAL MISSILE INVENTORY, 6 [7 BIT]	USED IN CONJUNCTION WITH THE MISSILE TYPE FIELD IT AMPLIFIES. AN ESTIMATED AMOUNT OF OPERATIONAL MISSILES OF THE SPECIFIED TYPE REMAINING ON THE WEAPON SYSTEM.	J13.3C5
047 OPERATIONAL MISSILE INVENTORY, 7 [7 BIT]	USED IN CONJUNCTION WITH THE MISSILE TYPE FIELD IT AMPLIFIES. AN ESTIMATED AMOUNT OF OPERATIONAL MISSILES OF THE SPECIFIED TYPE REMAINING ON THE WEAPON SYSTEM.	J13.3C6
048 OPERATIONAL MISSILE INVENTORY, 8 [7 BIT]	USED IN CONJUNCTION WITH THE MISSILE TYPE FIELD IT AMPLIFIES. AN ESTIMATED AMOUNT OF OPERATIONAL MISSILES OF THE SPECIFIED TYPE REMAINING ON THE WEAPON SYSTEM.	J13.3C6
049 OPERATIONAL MISSILE INVENTORY, 9 [7 BIT]	USED IN CONJUNCTION WITH THE MISSILE TYPE FIELD IT AMPLIFIES. AN ESTIMATED AMOUNT OF OPERATIONAL MISSILES OF THE SPECIFIED TYPE REMAINING ON THE WEAPON SYSTEM.	J13.3C6

B-325

APPENDIX B

DFI NAME
408 WEAPON/SENSOR INVENTORY

DUI NAME	EXPLANATION	APPLICABILITY
050 OPERATIONAL MISSILE INVENTORY, 10 [7 BIT]	USED IN CONJUNCTION WITH THE MISSILE TYPE FIELD IT AMPLIFIES. AN ESTIMATED AMOUNT OF OPERATIONAL MISSILES OF THE SPECIFIED TYPE REMAINING ON THE WEAPON SYSTEM.	J13.3C7
051 OPERATIONAL MISSILE INVENTORY, 11 [7 BIT]	USED IN CONJUNCTION WITH THE MISSILE TYPE FIELD IT AMPLIFIES. AN ESTIMATED AMOUNT OF OPERATIONAL MISSILES OF THE SPECIFIED TYPE REMAINING ON THE WEAPON SYSTEM.	J13.3C7
052 OPERATIONAL MISSILE INVENTORY, 12 [7 BIT]	USED IN CONJUNCTION WITH THE MISSILE TYPE FIELD IT AMPLIFIES. AN ESTIMATED AMOUNT OF OPERATIONAL MISSILES OF THE SPECIFIED TYPE REMAINING ON THE WEAPON SYSTEM.	J13.3C7
053 TORPEDO INVENTORY, 1 [3 BIT]	USED IN CONJUNCTION WITH THE TORPEDO TYPE FIELD IT AMPLIFIES. AN ESTIMATED AMOUNT OF OPERATIONAL TORPEDOES OF THE SPECIFIED TYPE REMAINING ON THE WEAPON SYSTEM.	J13.4C1
054 TORPEDO INVENTORY, 2 [3 BIT]	USED IN CONJUNCTION WITH THE TORPEDO TYPE FIELD IT AMPLIFIES. AN ESTIMATED AMOUNT OF OPERATIONAL TORPEDOES OF THE SPECIFIED TYPE REMAINING ON THE WEAPON SYSTEM.	J13.4C1

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 005-010 -----		
NO STATEMENT	0	
ZERO USEABLE	1	
ONE USEABLE	2	
TWO OR MORE USEABLE	3	

DFI NAME
408 WEAPON/SENSOR INVENTORY

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
----- FOR DUIS 011 AND 013 -----		
NO STATEMENT	0	
ZERO USEABLE	1	
ONE THROUGH EIGHT USEABLE	2	
NINE OR MORE USEABLE.	3	
----- FOR DUI 012 -----		
NO STATEMENT	0	
ZERO USEABLE	1	
ONE THROUGH FOUR USEABLE	2	
FIVE OR MORE USEABLE	3	
----- FOR DUIS 014, 015, 037-039, AND 044-052 -----		
0 THROUGH 125 MISSILES	0 THROUGH 125	IN ONE MISSILE INCREMENTS.
GREATER THAN 125 MISSILES	126	
NO STATEMENT	127	
----- FOR DUIS 032-036, AND 040-043 -----		
0 THROUGH 62 UNITS	0 THROUGH 62	
NO STATEMENT	63	
----- FOR DUIS 053-054 -----		
0 THROUGH 4 TORPEDOES	0 THROUGH 4	IN ONE TORPEDO INCREMENTS.
5 THROUGH 8 TORPEDOES	5	
GREATER THAN 8 TORPEDOES	6	
NO STATEMENT	7	

B-327

MIL-STD-6016B
APPENDIX B

DFI NAME DEFINITION
409 FUEL THE AMOUNT OF FUEL.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 FUEL, SURFACE (MARITIME) [3 BIT]	THE CURRENT AMOUNT OF FUEL REMAINING ON BOARD AS A PERCENTAGE OF TOTAL CAPACITY.	J13.3C1
003 FUEL [12 BIT]	THE CURRENT FUEL IN POUNDS REMAINING IN THE CONTROLLED PLATFORM.	J13.2I
004 THREAT FUEL [5 BIT]	THE CURRENT KNOWN AMOUNT OF FUEL REMAINING IN THE THREAT.	J6.0C1 J15.0C1

DATA ITEM	BIT CODE	EXPLANATION
-----------	----------	-------------

----- FOR DUI 001 -----

NO STATEMENT	0
0 THROUGH 30 PERCENT	1
31 PERCENT THROUGH 40 PERCENT	2
41 PERCENT THROUGH 50 PERCENT	3
51 PERCENT THROUGH 60 PERCENT	4
61 PERCENT THROUGH 70 PERCENT	5
71 PERCENT THROUGH 85 PERCENT	6
86 PERCENT THROUGH 100 PERCENT	7

----- FOR DUI 003 -----

0 THROUGH 409,400 POUNDS OF FUEL	0 THROUGH 4094	FUEL IN 100 POUND INCREMENTS.
NO STATEMENT	4095	

DFI NAME
409 FUEL

DATA ITEM (CONTINUED)
----- FOR DUI 004 -----

NO STATEMENT
.1 THROUGH 3 HOURS OF
FUEL REMAINING
GREATER THAN 3 HOURS OF
FUEL REMAINING

BIT CODE

0
1 THROUGH 30
31

EXPLANATION

FUEL REMAINING IN .1 HOUR
INCREMENTS.

DFI NAME DEFINITION
 417 FREQUENCY EXPRESSES THE FREQUENCY OR FREQUENCY RANGE OF AN EMITTER.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
001 FREQUENCY, INTERCEPT [10 BIT]	SPECIFIES THE SPECIFIC FREQUENCY OF AN INTERCEPT. THE VALUE OF THIS FIELD IS USED WITH THE FREQUENCY EXPONENT FIELD TO DETERMINE THE ACTUAL FREQUENCY.	J12.7E0		
002 VOICE GROUP A CHANNEL [7 BIT]	INDICATES THE JTIDS/MIDS VOICE GROUP A CHANNEL ON WHICH THE REFERENCE TN IS ASSIGNED TO OPERATE.	J13.2C6	J13.3C4	
003 VOICE GROUP B CHANNEL [7 BIT]	INDICATES THE JTIDS/MIDS VOICE GROUP B CHANNEL ON WHICH THE REFERENCE TN IS ASSIGNED TO OPERATE.	J13.2C6	J13.3C4	
006 FREQUENCY, 1 [20 BIT] (FRQ1)	WHEN THE FREQUENCY/FREQUENCY RANGE FIELD IS SET TO ZERO, THIS FIELD IS USED WITH THE FREQUENCY MULTIPLIER, 1 FIELD TO SPECIFY A SINGLE FREQUENCY BEING DESCRIBED. WHEN THE FREQUENCY/FREQUENCY RANGE FIELD IS SET TO ONE, THIS FIELD IS USED WITH THE FREQUENCY MULTIPLIER, 1 FIELD TO SPECIFY THE LOWER LIMIT OF A FREQUENCY RANGE BEING DESCRIBED.	J3.7C4	J14.0E0	J14.2C4
007 FREQUENCY, 2 [20 BIT] (FRQ2)	WHEN THE FREQUENCY/FREQUENCY RANGE FIELD IS SET TO ZERO, THIS FIELD SHOULD BE SET TO NO STATEMENT. WHEN THE FREQUENCY/FREQUENCY RANGE FIELD IS SET TO ONE, THIS FIELD IS USED WITH THE FREQUENCY MULTIPLIER, 2 FIELD TO SPECIFY THE UPPER LIMIT OF A FREQUENCY RANGE BEING DESCRIBED.	J3.7C4	J14.0E0	J14.2C4
016 VOICE FREQUENCY/CHANNEL [13 BIT]	IDENTIFIES A UHF VOICE RADIO CHANNEL NUMBER TO ACCOUNT FOR 7000 POSSIBLE RADIO FREQUENCIES IN THE	J2.2C2 J2.5C1 J10.3C1	J2.3C2 J2.6C1 J12.4E0	J2.4C2 J9.0C1

APPENDIX B

DFI NAME
417 FREQUENCY

DUI NAME	EXPLANATION	APPLICABILITY
016 (CONTINUED)	225 TO 400 MHZ BAND OR THE OPTION OF SELECTING CHANNEL GROUP A OR CHANNEL GROUP B.	
017 LINK 4A FREQUENCY [13 BIT]	IDENTIFIES A UHF VOICE RADIO CHANNEL NUMBER TO ACCOUNT FOR 7000 POSSIBLE RADIO FREQUENCIES IN THE 225 TO 400 MHZ BAND.	J10.3C1 J12.4E0
020 FREQUENCY, SOURCE ACOUSTIC [15 BIT]	EXPRESSES THE FREQUENCY OF THE REPORTED ACOUSTIC CONTACT.	J5.4E0
021 FREQUENCY, ASSOCIATED ACOUSTIC 1 [15 BIT]	EXPRESSES AN ASSOCIATED FREQUENCY OF THE REPORTED ACOUSTIC CONTACT.	J5.4C1
022 FREQUENCY, ASSOCIATED ACOUSTIC 2 [15 BIT]	EXPRESSES AN ASSOCIATED FREQUENCY OF THE REPORTED ACOUSTIC CONTACT.	J5.4C1

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
UNDEFINED	1 THROUGH 99	
1.00 THROUGH 9.99 HZ	100 THROUGH 999	IN .01 HZ INCREMENTS.
UNDEFINED	1000 THROUGH 1023	
----- FOR DUI 002 AND 003 -----		
NUMERIC	0 THROUGH 127	128 CHANNELS FROM 0-127.
----- FOR DUI 006 -----		
NO STATEMENT	0	
NUMERIC	1 THROUGH 1048575	EXPRESSED IN HERTZ. THIS VALUE IS USED WITH THE FREQUENCY MULTIPLIER, 1 FIELD TO SPECIFY MULTIPLES OF THIS FREQUENCY.

APPENDIX B

DFI NAME
417 FREQUENCY

DATA ITEM (CONTINUED)
----- FOR DUI 007 -----

NO STATEMENT
NUMERIC

BIT CODE
0
1 THROUGH 1048575

EXPLANATION

EXPRESSED IN HERTZ. THIS VALUE IS
USED WITH THE FREQUENCY
MULTIPLIER, 2 FIELD TO SPECIFY
MULTIPLES OF THIS FREQUENCY.

----- FOR DUI 016 -----

NO STATEMENT
UHF FREQUENCY

0
1 THROUGH 7000

THE BIT CODE IS RELATED TO THE UHF
FREQUENCY BY USING THE FOLLOWING
FORMULA:
$$\text{FREQ(MHZ)} = 225 + .025(N-1)$$

WHERE N = BIT CODE NUMBER.

ILLEGAL
CHANNEL GROUP A
CHANNEL GROUP B
ILLEGAL

7001 THROUGH 7039
7040 THROUGH 7167
7168 THROUGH 7295
7296 THROUGH 8191

128 CHANNELS FROM 0-127.
128 CHANNELS FROM 0-127.

----- FOR DUI 017 -----

NO STATEMENT
UHF FREQUENCY

0
1 THROUGH 7000

THE BIT CODE IS RELATED TO THE UHF
FREQUENCY BY USING THE FOLLOWING
FORMULA:
$$\text{FREQ(MHZ)} = 225 + .025(N-1)$$

WHERE N = BIT CODE NUMBER.

ILLEGAL

7001 THROUGH 8191

----- FOR DUIS 020, 021, AND 022 -----

NO STATEMENT
.125 HZ THROUGH
4095.875 HZ

0
1 THROUGH 32767

IN .125 HZ INCREMENTS.

APPENDIX B

DFI	NAME	DEFINITION
419	AXIS	

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME

EXPLANATION

APPLICABILITY

001 AREA MAJOR AXIS, 4
[7 BIT]

THIS FIELD IS USED IN CONJUNCTION WITH THE SQUARE/CIRCLE SWITCH, AREA MINOR AXIS, 4, AXIS ORIENTATION, LATITUDE, AND LONGITUDE TO DESCRIBE THE AREA OF A CIRCLE, ELLIPSE, SQUARE, OR RECTANGLE; OR THIS FIELD IS USED BY ITSELF TO DESCRIBE THE WIDTH OF A CORRIDOR OR A LOW LEVEL TRANSIT ROUTE CENTERED ON THE LINE. FOR OTHER THAN A CORRIDOR OR LOW LEVEL TRANSIT ROUTE, THE LENGTH EXPRESSED IN THIS FIELD IS DOUBLED AND CENTERED ON THE POSITION DESCRIBED BY THE LATITUDE AND LONGITUDE. THE INCREMENTS FOR THIS FIELD ARE EXPONENTIAL AND COMPUTED BY USING THE FOLLOWING FORMULA: LENGTH IN DATA MILES EQUALS 1.11 TO THE $(\text{BIT CODE} - 64)$ POWER. EXAMPLE: FOR DI VALUE 5, LENGTH = 1.11 TO THE $(5-64)$ POWER.

J3.0C5

002 AREA MINOR AXIS, 4
[7 BIT]

THIS FIELD IS USED IN CONJUNCTION WITH THE SQUARE/CIRCLE SWITCH, AREA MAJOR AXIS, 4, AXIS ORIENTATION, LATITUDE, AND LONGITUDE TO DESCRIBE THE AREA OF A CIRCLE, ELLIPSE, SQUARE, OR RECTANGLE. THE AREA MINOR AXIS IS ALWAYS ORIENTED AT 90 DEGREES TO THE MAJOR AXIS. THE LENGTH EXPRESSED IN THIS FIELD IS DOUBLED AND CENTERED ON THE POSITION DESCRIBED BY THE LATITUDE AND LONGITUDE. THE INCREMENTS FOR THIS FIELD ARE EXPONENTIAL AND COMPUTED BY USING THE FOLLOWING

J3.0C5

APPENDIX B

DFI NAME
419 AXIS

DUI NAME
002 (CONTINUED)

EXPLANATION

APPLICABILITY

FORMULA: LENGTH IN DATA MILES
EQUALS 1.11 TO THE (BIT CODE - 64)
POWER. EXAMPLE: FOR DI VALUE 5,
LENGTH = 1.11 TO THE (5-64) POWER.

003 AREA MAJOR AXIS
[6 BIT]

THIS FIELD IS USED IN CONJUNCTION
WITH THE SQUARE/CIRCLE SWITCH,
AREA MINOR AXIS, AXIS ORIENTATION,
LATITUDE AND LONGITUDE TO DESCRIBE
THE AREA OF A CIRCLE, ELLIPSE,
SQUARE OR RECTANGLE. THE LENGTH
EXPRESSED IN THIS FIELD IS DOUBLED
AND CENTERED ON THE POSITION DE-
SCRIBED BY THE LATITUDE AND
LONGITUDE.

J3.0C2 J3.7C2 J14.0C2
J14.2C2

004 AREA MINOR AXIS
[6 BIT]

THIS FIELD IS USED IN CONJUNCTION
WITH THE SQUARE/CIRCLE SWITCH,
AREA MAJOR AXIS, AXIS ORIENTATION,
LATITUDE AND LONGITUDE TO DESCRIBE
THE AREA OF A CIRCLE, ELLIPSE,
SQUARE OR RECTANGLE. THE AREA
MINOR AXIS IS ALWAYS ORIENTED AT
90 DEGREES TO THE AREA MAJOR AXIS.
THE LENGTH EXPRESSED IN THIS FIELD
IS DOUBLED AND CENTERED ON THE
POSITION DESCRIBED BY THE LATITUDE
AND LONGITUDE.

J3.0C2 J3.7C2 J14.0C2
J14.2C2

005 AREA MAJOR AXIS, 1
[6 BIT]

THIS FIELD IS USED IN CONJUNCTION
WITH THE SQUARE/CIRCLE SWITCH, 1;
AREA MINOR AXIS, 1; AXIS
ORIENTATION, 1; LATITUDE; AND
LONGITUDE TO DESCRIBE THE AREA OF
A CIRCLE, ELLIPSE, SQUARE, OR
RECTANGLE. THE LENGTH EXPRESSED
IN THIS FIELD IS DOUBLED AND
CENTERED ON THE POSITION DESCRIBED
BY THE LATITUDE AND LONGITUDE.

J7.6C1

APPENDIX B

DFI NAME
419 AXIS

DUI NAME
006 AREA MAJOR AXIS, 2
[6 BIT]

EXPLANATION
THIS FIELD IS USED IN CONJUNCTION
WITH THE SQUARE/CIRCLE SWITCH, 2;
AREA MINOR AXIS, 2; AXIS
ORIENTATION, 2; LATITUDE; AND
LONGITUDE TO DESCRIBE THE AREA OF
A CIRCLE, ELLIPSE, SQUARE, OR
RECTANGLE. THE LENGTH EXPRESSED
IN THIS FIELD IS DOUBLED AND
CENTERED ON THE POSITION DESCRIBED
BY THE LATITUDE AND LONGITUDE.

APPLICABILITY
J7.6C1

007 AREA MINOR AXIS, 1
[6 BIT]

THIS FIELD IS USED IN CONJUNCTION
WITH THE SQUARE/CIRCLE SWITCH, 1;
AREA MAJOR AXIS, 1; AXIS
ORIENTATION, 1; LATITUDE; AND
LONGITUDE TO DESCRIBE THE AREA OF
A CIRCLE, ELLIPSE, SQUARE, OR
RECTANGLE. THE AREA MINOR AXIS, 1
IS ALWAYS ORIENTED AT 90 DEGREES
TO THE AREA MAJOR AXIS, 1. THE
LENGTH EXPRESSED IN THIS FIELD IS
DOUBLED AND CENTERED ON THE
POSITION DESCRIBED BY THE LATITUDE
AND LONGITUDE.

J7.6C1

008 AREA MINOR AXIS, 2
[6 BIT]

THIS FIELD IS USED IN CONJUNCTION
WITH THE SQUARE/CIRCLE SWITCH, 2;
AREA MAJOR AXIS, 2; AXIS
ORIENTATION, 2; LATITUDE; AND
LONGITUDE TO DESCRIBE THE AREA OF
A CIRCLE, ELLIPSE, SQUARE, OR
RECTANGLE. THE AREA MINOR AXIS, 2
IS ALWAYS ORIENTED AT 90 DEGREES
TO THE AREA MAJOR AXIS, 2. THE
LENGTH EXPRESSED IN THIS FIELD IS
DOUBLED AND CENTERED ON THE
POSITION DESCRIBED BY THE LATITUDE
AND LONGITUDE.

J7.6C1

009 AREA MINOR AXIS, 3
[8 BIT]

THIS FIELD IS USED IN CONJUNCTION
WITH THE AREA MAJOR AXIS, 3, AXIS

J3.5C3

APPENDIX B

DFI NAME
419 AXIS

DUI NAME
009 (CONTINUED)

EXPLANATION
ORIENTATION, LATITUDE, AND
LONGITUDE TO DESCRIBE THE AREA OF
A SQUARE OR RECTANGLE. THE AREA
MINOR AXIS, 3 IS ALWAYS ORIENTED
AT 90 DEGREES TO THE AREA MAJOR
AXIS, 3. THE LENGTH EXPRESSED IN
THIS FIELD IS DOUBLED AND
CENTERED ON THE POSITION
DESCRIBED BY THE LATITUDE AND
LONGITUDE.

010 AREA MAJOR AXIS, 3
[8 BIT]

THIS FIELD IS USED IN CONJUNCTION
WITH THE AREA MINOR AXIS, 3, AXIS
ORIENTATION, LATITUDE AND
LONGITUDE TO DESCRIBE THE AREA OF
A SQUARE OR RECTANGLE. THE
LENGTH EXPRESSED IN THIS FIELD IS
DOUBLED AND CENTERED ON THE
POSITION DESCRIBED BY THE LATITUDE
AND LONGITUDE.

J3.5C3

DATA ITEM

BIT CODE

EXPLANATION

----- FOR DUIS 001 AND 002 -----

NO STATEMENT	0	
0.00140 DATA MILES	1	APPROXIMATELY 8 FEET.
0.00155 DATA MILES	2	APPROXIMATELY 9 FEET.
0.00172 DATA MILES	3	APPROXIMATELY 10 FEET.
0.00191 DATA MILES	4	APPROXIMATELY 11 FEET.
0.00212 DATA MILES	5	APPROXIMATELY 13 FEET.
0.00235 DATA MILES	6	APPROXIMATELY 14 FEET.
0.00261 DATA MILES	7	APPROXIMATELY 16 FEET.
0.00290 DATA MILES	8	APPROXIMATELY 17 FEET.
0.00322 DATA MILES	9	APPROXIMATELY 19 FEET.
0.00357 DATA MILES	10	APPROXIMATELY 21 FEET.
0.00396 DATA MILES	11	APPROXIMATELY 24 FEET.
0.00440 DATA MILES	12	APPROXIMATELY 26 FEET.
0.00488 DATA MILES	13	APPROXIMATELY 29 FEET.
0.00542 DATA MILES	14	APPROXIMATELY 33 FEET.
0.00601 DATA MILES	15	APPROXIMATELY 36 FEET.

DFI NAME
419 AXIS

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
0.00668 DATA MILES	16	APPROXIMATELY 40 FEET.
0.00741 DATA MILES	17	APPROXIMATELY 45 FEET.
0.00823 DATA MILES	18	APPROXIMATELY 49 FEET.
0.00913 DATA MILES	19	APPROXIMATELY 55 FEET.
0.01013 DATA MILES	20	APPROXIMATELY 61 FEET.
0.01125 DATA MILES	21	APPROXIMATELY 68 FEET.
0.01249 DATA MILES	22	APPROXIMATELY 75 FEET.
0.01386 DATA MILES	23	APPROXIMATELY 83 FEET.
0.01538 DATA MILES	24	APPROXIMATELY 92 FEET.
0.01708 DATA MILES	25	APPROXIMATELY 103 FEET.
0.01896 DATA MILES	26	APPROXIMATELY 114 FEET.
0.02104 DATA MILES	27	APPROXIMATELY 126 FEET.
0.02335 DATA MILES	28	APPROXIMATELY 140 FEET.
0.02592 DATA MILES	29	APPROXIMATELY 156 FEET.
0.02878 DATA MILES	30	APPROXIMATELY 173 FEET.
0.03194 DATA MILES	31	APPROXIMATELY 192 FEET.
0.03545 DATA MILES	32	APPROXIMATELY 213 FEET.
0.03935 DATA MILES	33	APPROXIMATELY 236 FEET.
0.04368 DATA MILES	34	APPROXIMATELY 262 FEET.
0.04849 DATA MILES	35	APPROXIMATELY 291 FEET.
0.05382 DATA MILES	36	APPROXIMATELY 323 FEET.
0.05974 DATA MILES	37	APPROXIMATELY 359 FEET.
0.06631 DATA MILES	38	APPROXIMATELY 398 FEET.
0.07361 DATA MILES	39	APPROXIMATELY 442 FEET.
0.08170 DATA MILES	40	APPROXIMATELY 490 FEET.
0.09069 DATA MILES	41	APPROXIMATELY 544 FEET.
0.10067 DATA MILES	42	APPROXIMATELY 604 FEET.
0.11174 DATA MILES	43	APPROXIMATELY 671 FEET.
0.12403 DATA MILES	44	APPROXIMATELY 744 FEET.
0.13768 DATA MILES	45	APPROXIMATELY 826 FEET.
0.15282 DATA MILES	46	APPROXIMATELY 917 FEET.
0.16963 DATA MILES	47	APPROXIMATELY 1018 FEET.
0.18829 DATA MILES	48	APPROXIMATELY 1130 FEET.
0.20900 DATA MILES	49	APPROXIMATELY 1254 FEET.
0.23199 DATA MILES	50	APPROXIMATELY 1392 FEET.
0.25751 DATA MILES	51	APPROXIMATELY 1545 FEET.
0.28584 DATA MILES	52	APPROXIMATELY 1715 FEET.
0.31728 DATA MILES	53	APPROXIMATELY 1904 FEET.
0.35218 DATA MILES	54	APPROXIMATELY 2113 FEET.
0.39092 DATA MILES	55	APPROXIMATELY 2346 FEET.
0.43393 DATA MILES	56	APPROXIMATELY 2604 FEET.

B-337

MIL-STD-6016B
APPENDIX B

DFI NAME
419 AXIS

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
0.48166 DATA MILES	57	APPROXIMATELY 2890 FEET.
0.53464 DATA MILES	58	APPROXIMATELY 3208 FEET.
0.59345 DATA MILES	59	APPROXIMATELY 3561 FEET.
0.65873 DATA MILES	60	APPROXIMATELY 3952 FEET.
0.73119 DATA MILES	61	APPROXIMATELY 4387 FEET.
0.81162 DATA MILES	62	APPROXIMATELY 4870 FEET.
0.90090 DATA MILES	63	APPROXIMATELY 5405 FEET.
1.00000 DATA MILES	64	APPROXIMATELY 6000 FEET.
1.11000 DATA MILES	65	APPROXIMATELY 6660 FEET.
1.23210 DATA MILES	66	APPROXIMATELY 7393 FEET.
1.36763 DATA MILES	67	APPROXIMATELY 8206 FEET.
1.51807 DATA MILES	68	APPROXIMATELY 9108 FEET.
1.68506 DATA MILES	69	APPROXIMATELY 10110 FEET.
1.87041 DATA MILES	70	APPROXIMATELY 11223 FEET.
2.07616 DATA MILES	71	APPROXIMATELY 12457 FEET.
2.30454 DATA MILES	72	APPROXIMATELY 13827 FEET.
2.55804 DATA MILES	73	APPROXIMATELY 15348 FEET.
2.83942 DATA MILES	74	APPROXIMATELY 17037 FEET.
3.15176 DATA MILES	75	APPROXIMATELY 18911 FEET.
3.49845 DATA MILES	76	APPROXIMATELY 20991 FEET.
3.88328 DATA MILES	77	APPROXIMATELY 23300 FEET.
4.31044 DATA MILES	78	APPROXIMATELY 25863 FEET.
4.78459 DATA MILES	79	APPROXIMATELY 28708 FEET.
5.31090 DATA MILES	80	APPROXIMATELY 31865 FEET.
5.89509 DATA MILES	81	APPROXIMATELY 35371 FEET.
6.54355 DATA MILES	82	APPROXIMATELY 39261 FEET.
7.26335 DATA MILES	83	APPROXIMATELY 43580 FEET.
8.06231 DATA MILES	84	APPROXIMATELY 48374 FEET.
8.94917 DATA MILES	85	APPROXIMATELY 53695 FEET.
9.93358 DATA MILES	86	APPROXIMATELY 59601 FEET.
11.02627 DATA MILES	87	APPROXIMATELY 66158 FEET.
12.23916 DATA MILES	88	APPROXIMATELY 73435 FEET.
13.58547 DATA MILES	89	APPROXIMATELY 81513 FEET.
15.07987 DATA MILES	90	APPROXIMATELY 90479 FEET.
16.73866 DATA MILES	91	APPROXIMATELY 100432 FEET.
18.57991 DATA MILES	92	APPROXIMATELY 111480 FEET.
20.62370 DATA MILES	93	APPROXIMATELY 123742 FEET.
22.89231 DATA MILES	94	APPROXIMATELY 137354 FEET.
25.41046 DATA MILES	95	APPROXIMATELY 152463 FEET.
28.20561 DATA MILES	96	APPROXIMATELY 169234 FEET.
31.30823 DATA MILES	97	APPROXIMATELY 187849 FEET.

B - 338

MIL-STD-6016B
APPENDIX B

DFI NAME
419 AXIS

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
34.75213 DATA MILES	98	APPROXIMATELY 208513 FEET.
38.57487 DATA MILES	99	APPROXIMATELY 231449 FEET.
42.81810 DATA MILES	100	APPROXIMATELY 256909 FEET.
47.52810 DATA MILES	101	APPROXIMATELY 285169 FEET.
52.75619 DATA MILES	102	APPROXIMATELY 316537 FEET.
58.55937 DATA MILES	103	APPROXIMATELY 351356 FEET.
65.00090 DATA MILES	104	APPROXIMATELY 390005 FEET.
72.15100 DATA MILES	105	APPROXIMATELY 432906 FEET.
80.08761 DATA MILES	106	APPROXIMATELY 480526 FEET.
88.89725 DATA MILES	107	APPROXIMATELY 533384 FEET.
98.67595 DATA MILES	108	APPROXIMATELY 592056 FEET.
109.53030 DATA MILES	109	APPROXIMATELY 657182 FEET.
121.57864 DATA MILES	110	APPROXIMATELY 729472 FEET.
134.95229 DATA MILES	111	APPROXIMATELY 809714 FEET.
149.79704 DATA MILES	112	APPROXIMATELY 898782 FEET.
166.27472 DATA MILES	113	APPROXIMATELY 997648 FEET.
184.56494 DATA MILES	114	APPROXIMATELY 1107390 FEET.
204.86710 DATA MILES	115	APPROXIMATELY 1229203 FEET.
227.40248 DATA MILES	116	APPROXIMATELY 1364415 FEET.
252.41675 DATA MILES	117	APPROXIMATELY 1514501 FEET.
280.18259 DATA MILES	118	APPROXIMATELY 1681096 FEET.
311.00269 DATA MILES	119	APPROXIMATELY 1866016 FEET.
345.21298 DATA MILES	120	APPROXIMATELY 2071278 FEET.
383.18643 DATA MILES	121	APPROXIMATELY 2299119 FEET.
425.33694 DATA MILES	122	APPROXIMATELY 2552022 FEET.
472.12399 DATA MILES	123	APPROXIMATELY 2832744 FEET.
524.05762 DATA MILES	124	APPROXIMATELY 3144346 FEET.
581.70398 DATA MILES	125	APPROXIMATELY 3490224 FEET.
645.69147 DATA MILES	126	APPROXIMATELY 3874149 FEET.
716.71753 DATA MILES	127	APPROXIMATELY 4300305 FEET.
----- FOR DUIS 003-008 -----		
0 THROUGH 244 DATA MILES	0 THROUGH 61	IN FOUR DATA MILE INCREMENTS.
248 DATA MILES OR MORE	62	
NO STATEMENT	63	

B-339

MIL-STD-6016B
APPENDIX B

DFI NAME
419 AXIS

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
----- FOR DUIS 009 AND 010 -----		
NO STATEMENT	0	
<0.010936133 DATA MILES	1	
0.021872266 THROUGH	2 THROUGH 5	IN 0.010936133 DATA MILE INCREMENTS.
0.054680665 DATA MILES		
0.082020997 THROUGH	6 THROUGH 13	IN 0.027340332 DATA MILE INCREMENTS.
0.273403325 DATA MILES		
0.32808339 THROUGH	14 THROUGH 92	IN 0.054680665 DATA MILE INCREMENTS.
4.6478565518 DATA MILES		
4.9212559843 THROUGH	93 THROUGH 132	IN 0.273403325 DATA MILE INCREMENTS.
15.31058618 DATA MILES		
15.85739283 THROUGH	133 THROUGH 255	IN 0.5468806649 DATA MILE INCREMENTS.
82.56780402 DATA MILES		

B-340

MIL-STD-6016B
APPENDIX B

APPENDIX B

DFI	NAME	DEFINITION
420	CHANNEL NUMBER	IDENTIFIES THE CHANNEL NUMBER ASSIGNED.

DATA STANDARD USAGE: Link 16	STATUS:
------------------------------	---------

DUI NAME	EXPLANATION	APPLICABILITY
008 CHANNEL NUMBER, SONOBUOY RF [7 BIT]	IDENTIFIES THE RADIO FREQUENCY CHANNEL OF THE SONOBUOY. INTERPRETED ONLY WHEN THE ASW POINT AMPLIFY IN THE J3.0I IS SET TO 9 (SONOBUOY).	J3.0C3

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 008 -----		
NO STATEMENT	0	
RF CHANNEL	1 THROUGH 99	
UNDEFINED	100 THROUGH 127	

DFI NAME
422 EMITTER NUMBER

DEFINITION
USED TO IDENTIFY A SPECIFIC EMITTER.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME

EXPLANATION

APPLICABILITY

001 EMITTER NUMBER
[16 BIT]

IDENTIFIES A SPECIFIC EMITTER.

J3.7C3 J14.0C3 J14.2C3

DATA ITEM

BIT CODE

EXPLANATION

----- FOR DUI 001 -----

FOR EMITTER NUMBER
INDICATOR (EN=1)

NATO SPOT
NUMBER
ILLEGAL

000000 THROUGH 037777
(OCTAL)
040000 THROUGH 177777
(OCTAL)

THE NATO SPOT NUMBER USES 5 OCTAL
DIGITS WITH A RANGE OF 0-37777.

DFI NAME DEFINITION
423 MULTIPLE EVALUATION INDICATES AN UNCERTAINTY IN THE EVALUATION OF AN EMITTER.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 MULTIPLE EVALUATION [1 BIT] (MUL EVL)		J14.0C3

DATA ITEM	BIT CODE	EXPLANATION
-----------	----------	-------------

----- FOR DUI 001 -----

UNIQUE EMITTER	0	
NOT UNIQUE	1	EVALUATION REPORTED IS MOST SIGNIFI- CANT OF SEVERAL POSSIBLE EMITTERS.

DFI NAME DEFINITION
424 THREAT EVALUATION EVALUATES THE THREAT OF A REPORTED EA OR ES INTERCEPT.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
003 THREAT EVALUATION [3 BIT]	INDICATES WHETHER OR NOT AN EMITTER IS A THREAT.	J14.0I

DATA ITEM	BIT CODE	EXPLANATION
-----------	----------	-------------

----- FOR DUI 003 -----

PENDING/NO STATEMENT	0
UNKNOWN	1
NON-THREAT	2
THREAT	3
FRIEND	4
UNDEFINED	5 THROUGH 7

DEFINITION
SPECIFIES THE BROAD CLASSIFICATION OF AN EA OR ES INTERCEPT.
THESE CLASSIFICATIONS ARE DEPENDENT UPON WHETHER OR NOT THE
INTERCEPT IS EA AND ARE FURTHER BROKEN DOWN BY AMPLIFYING
CHARACTERISTICS (DFI #426).

STATUS:

EXPLANATION

APPLICABILITY

SPECIFIES THE BROAD CLASSIFICATION
OF AN INTERCEPT. THESE
CLASSIFICATIONS ARE DEPENDENT UPON
WHETHER OR NOT THE INTERCEPT IS EA
AND ARE FURTHER DEFINED BY
AMPLIFYING CHARACTERISTICS.

J14.0C3

DATA ITEM

BIT CODE

EXPLANATION

- - - - - FOR DUI 003 - - - - -

```
-----  
FOR EA (FIX BRG = 4)
```

NO STATEMENT
RADAR
IFF
COMMUNICATION
UNDEFINED

0
1
2
3
4 THROUGH 7

FOR NON-EA (FIX BRG NOT
EQUAL TO 4)

NO STATEMENT
RADAR TYPE
COMMUNICATION
ANTI-SHIP CAPABLE
MISSILE
COUNTERMEASURES
UNDEFINED

0
1
2
3

4
5 THROUGH 7

DFI	NAME	DEFINITION	
426	AMPLIFYING CHARACTERISTICS	AMPLIFIES THE BROAD CLASSIFICATION (BC) (DFI #425) OF EA AND ES INTERCEPTS.	
DATA STANDARD USAGE: Link 16		STATUS:	
DUI	NAME	EXPLANATION	APPLICABILITY
003	AMPLIFYING CHARACTERISTICS [3 BIT] (AC)	USED TO AMPLIFY THE BROAD CLASSIFICATION FIELD.	J14.0C3
	DATA ITEM	BIT CODE	EXPLANATION
	----- FOR DUI 003 -----		

	FOR EA (FIX BRG = 4)		

	FOR NO STATEMENT (BC = 0)		

	NO STATEMENT	0	
	ILLEGAL	1 THROUGH 7	

	FOR RADAR (BC = 1)		

	UNKNOWN	0	
	DISRUPTIVE	1	
	DECEPTIVE	2	
	IRCM	3	
	LASER-CM	4	
	SIDELOBE	5	
	CHAFF	6	
	MULTIPLE JAMMER	7	

DFI NAME
426 AMPLIFYING CHARACTERISTICS

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
----- FOR IFF (BC = 2) -----		
UNKNOWN	0	
DISRUPTIVE TRANSPONDER	1	
DECEPTIVE TRANSPONDER	2	
DECEPTIVE INTERROGATOR	3	
DISRUPTIVE INTERROGATOR	4	
UNDEFINED	5 THROUGH 6	
MULTIPLE JAMMER	7	
----- FOR COMMUNICATION (BC = 3) -----		
NO STATEMENT	0	
UNDEFINED	1 THROUGH 7	
----- FOR UNDEFINED (BC = 4 THROUGH 7) -----		
UNDEFINED	0 THROUGH 7	
----- FOR NON-EA (FIX BRG NOT EQUAL TO 4) -----		
----- FOR NO STATEMENT (BC = 0) -----		
NO STATEMENT	0	
ILLEGAL	1 THROUGH 7	

DFI NAME
426 AMPLIFYING CHARACTERISTICS

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
----- FOR RADAR TYPE (BC = 1) -----		
NO STATEMENT	0	
2D SEARCH	1	
3D SEARCH	2	
FIRE CONTROL (CONVENTIONAL)	3	
FIRE CONTROL (LASER)	4	
DOPPLER	5	
CW	6	
UNDEFINED	7	
----- FOR COMMUNICATION (BC = 2) -----		
NO STATEMENT	0	
VOICE	1	
KEYED TELEGRAPH	2	
TELETYPE	3	
DATA LINK	4	
TV/IMAGERY	5	
MULTIPLEX	6	
UNDEFINED	7	
----- FOR ASCM (BC = 3) -----		
NO STATEMENT	0	
TARGETING RADAR	1	
TARGETING LINK	2	
BEACON	3	
COMMAND GUIDANCE	4	
TERMINAL GUIDANCE	5	
UNDEFINED	6 THROUGH 7	

DFI NAME
426 AMPLIFYING CHARACTERISTICS

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
----- FOR COUNTERMEASURES (BC = 4) -----		
NO STATEMENT	0	
DISRUPTIVE	1	
DECEPTIVE	2	
IRCM	3	
LASER-CM	4	
UNDEFINED	5 THROUGH 7	
----- FOR UNDEFINED (BC = 5 THROUGH 7) -----		
UNDEFINED	0 THROUGH 7	

DFI NAME DEFINITION
427 JAMMER RECEIVED SIGNAL LEVEL A MEASURE OF THE POWER OF AN EA JAMMER.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 JAMMER RECEIVED SIGNAL LEVEL [3 BIT] (JRS LVL)	A MEASURE OF THE POWER OF AN EA JAMMER.	J14.0C4

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
21 THROUGH 24 DBM	1	
25 THROUGH 28 DBM	2	
29 THROUGH 32 DBM	3	
33 THROUGH 36 DBM	4	
37 THROUGH 40 DBM	5	
41 THROUGH 44 DBM	6	
45 OR MORE DBM	7	

DFI	NAME	DEFINITION
428	ANGULAR ELEVATION	EXPRESSES THE ANGULAR ELEVATION IN UNITS OF 1/2048 OF A CIRCLE, MEASURED FROM THE HORIZONTAL. ABOVE ANGLES ARE POSITIVE AND BELOW ANGLES ARE NEGATIVE.
DATA STANDARD USAGE: Link 16		STATUS:
DUI NAME	EXPLANATION	APPLICABILITY
002 ELEVATION ANGLE [10 BIT]	EXPRESSES ANGULAR ELEVATION MEASURED FROM THE HORIZONTAL. ABOVE HORIZONTAL ANGLES ARE POSITIVE. BELOW HORIZONTAL ANGLES ARE NEGATIVE.	J3.7C1 J14.0C1 J14.2C1
003 ELEVATION ANGLE, 2 [15 BIT]	EXPRESSES ANGULAR ELEVATION MEASURED FROM THE HORIZONTAL. ABOVE HORIZONTAL ANGLES ARE POSITIVE. BELOW HORIZONTAL ANGLES ARE NEGATIVE. THE ORIGIN OF THE ANGLE IS SPECIFIED BY THE LATITUDE AND LONGITUDE FIELDS IN J12.7I AND THE ANGLE ORIGIN ALTITUDE FIELD IN J12.7E0.	J12.0C7 J12.7E0
DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 002 -----		EXPRESSES ANGULAR ELEVATION IN UNITS OF 1/2048 OF A CIRCLE MEASURED FROM THE HORIZONTAL. ANGULAR ELEVATIONS ABOVE THE HORIZONTAL ARE POSITIVE. ANGULAR ELEVATIONS BELOW THE HORIZONTAL ARE NEGATIVE. BIT CODES ARE IN TWOS COMPLEMENT CODING.
0 THROUGH 511 PI/1024 RADIANS	0 THROUGH 511	IN PI/1024 RADIAN INCREMENTS.
NO STATEMENT	512	
-511 PI/1024 THROUGH -PI/1024 RADIANS	513 THROUGH 1023	IN PI/1024 RADIAN INCREMENTS.

DFI NAME
428 ANGULAR ELEVATION

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
----- FOR DUI 003 -----		
0 THROUGH 89.994507	0 THROUGH 16383	
DEGREES		
NO STATEMENT	16384	
-89.994507 THROUGH	16385 THROUGH 32767	
-0.005493 DEGREES		

DFI NAME DEFINITION
429 LOCK-ON

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 LOCK-ON [2 BIT]	INDICATES WHETHER ES CONTACT IS LOCKED ON OR IS IN A SURVEILLANCE MODE.	J14.0I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
LOCK-ON	1	
SPY	2	
UNDEFINED	3	

DFI	NAME	DEFINITION
430	EMITTER OPERATION MODE NUMBER	A NUMERIC INDEX ASSIGNED TO EACH MODE OF A GIVEN EMITTER.
DATA STANDARD USAGE: Link 16		STATUS:
DUI NAME	EXPLANATION	APPLICABILITY
001 MODE NUMBER [6 BIT]	A TWO DIGIT NUMERIC INDEX SEQUENTIALY ASSIGNED TO EACH MODE OF A GIVEN EMITTER. A MODE IS A GROUP OF RF PARAMETERS WHICH CHARACTERIZE SEVERAL POSSIBLE OPERATING CONDITIONS OF A GIVEN EMITTER. MODE NUMBERS AMPLIFY THE EMITTER NUMBER FIELD. NOT ALL EMITTERS HAVE MODE NUMBERS.	J3.7C4 J14.0C3 J14.2C3
DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
NUMERIC	1 THROUGH 63	

DFI NAME DEFINITION
431 CONFIDENCE PROVIDES THE DEGREE OF CONFIDENCE OF THE REPORTED EMITTER
EVALUATION ON A SCALE FROM 0 TO 7, WITH THE HIGHEST CONFIDENCE
BEING SEVEN.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
003 EMITTER CONFIDENCE [3 BIT]	THE CONFIDENCE IS COMPUTED ON THE BASIS OF THE NUMBER OF PARAMETER MATCHES FOR THE FOLLOWING EMITTER PARAMETERS: FREQUENCY, PULSE REPETITION FREQUENCY, PULSE WIDTH, JITTER, SCAN CYCLE/ANTENNA ROTATION PERIOD/SCAN RATE, SCAN TYPE AND POLARIZATION. A PARAMETER MATCH MEANS THAT AN EMITTER PARAMETER HAS BEEN DETECTED, MEASURED, AND COMPARED WITH DATA STORED IN INTELLIGENCE FILES. IT FURTHER IMPLIES THAT NO PARAMETER FOUND IS OUTSIDE THE RANGE SPECIFIED IN THE INTELLIGENCE FILE.	J3.7C3	J14.0C3	J14.2C3
004 PLATFORM EVALUATION CONFIDENCE [3 BIT]	THE PLATFORM EVALUATION CONFIDENCE IS A STATEMENT APPENDED TO A REPORT FOR THE PURPOSE OF INDICATING THE RELATIVE DEGREE OF CONFIDENCE AN EVALUATOR/OPERATOR HAS IN THE ENVIRONMENT/CATEGORY. THE PLATFORM EVALUATION CONFIDENCE IS ASSIGNED BY AN EVALUATOR/OPERATOR BASED ON INFORMATION OBTAINED FROM LOCAL SENSORS, COMPARISON OF EMITTER(S) CHARACTERISTICS TO INTELLIGENCE FILES, AND/OR INFORMATION PROVIDED BY REMOTE SOURCES.	J3.7C1	J14.0C5	

APPENDIX B

DFI NAME
431 CONFIDENCE

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 003 -----		
NO STATEMENT	0	LOW CONFIDENCE - LESS THAN 4 PARAMETER MATCHES. THE VALUE IS DETERMINED BY THE FOLLOWING RULES: A. INCREASE ONE VALUE FOR EACH ADDITIONAL PARAMETER MATCH ABOVE 3. B. INCREASE ONE VALUE FOR AN ES/ NON-ES 'OPERATOR KNOWN' ASSOCIATION (THE OPERATOR RECOGNIZES AN ASSOCIATION THAT MAY OR MAY NOT HAVE BEEN TRANSMITTED ON THE LINK). C. INCREASE TWO VALUES FOR EVERY 'OPERATOR KNOWN' EMITTER ASSOCIATION. D. THE TOTAL SHALL NOT EXCEED 5. HIGH CONFIDENCE (OPERATOR EVALUATION). POSITIVE CONFIDENCE.
VALUE 1	1	
VALUE 2 THROUGH 5	2 THROUGH 5	
VALUE 6	6	
VALUE 7	7	
----- FOR DUI 004 -----		
NO STATEMENT	0	
POSITIVE/CERTAIN	1	
PROBABLE	2	
POSSIBLE	3	
LOW	4	
UNDEFINED	5 THROUGH 7	

DFI NAME DEFINITION
432 JITTER INDICATION AN INDICATION OF THE PRESENCE OF JITTER.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 JITTER [2 BIT]	SPECIFIES IF JITTER IS PRESENT ON THE INTERCEPTED EMISSION.	J14.0C4

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
NO JITTER	1	
JITTER PRESENT	2	
UNDEFINED	3	

APPENDIX B

DFI NAME DEFINITION
433 SCAN TYPE THE SCAN TYPE OF AN EMITTER.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 SCAN TYPE [5 BIT]	THE TYPE OF PATTERN OR SCAN THAT THE EMITTED ELECTROMAGNETIC ENERGY FOLLOWS AS A VOLUME IN SPACE IS SEARCHED.	J14.0C4

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
FIXED SCAN (D)	1	
CIRCULAR SCAN (A)	2	
LOBE SWITCHING (G)	3	
DISUSED	4	
SECTOR SCAN	5	
CONICAL SCAN (F)	6	
COMPLEX SCAN	7	
SPIRAL (K)	8	
RASTER (J)	9	
VARIABLE/RANDOM	10	
STEADY	11	
MANUAL (E)	12	
UNI-DIRECTIONAL	13	
UNDETERMINED (Z)	14	
HORIZONTAL SECTOR (BIDI) (B)	15	
HORIZONTAL SECTOR (UNI) (T)	16	
VERTICAL SECTOR (BIDI) (C)	17	
VERTICAL SECTOR (UNI) (S)	18	
SECTOR AND CONICAL (O)	19	
BI-DIRECTIONAL (BIDI)	20	
CIRCULAR AND CONICAL (N)	21	
HELICAL (L)	22	
CIRCULAR AND VERTICAL SECTOR (M)	23	
AGILE BEAM (P)	24	

DFI NAME
433 SCAN TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
UNI-DIRECTIONAL SECTOR (U)	25	
BI-DIRECTIONAL SECTOR (V)	26	
OTHER COMBINATIONS AND PATTERNS (R)	27	
MONOPULSE (H)	28	
PASSIVE SCAN (Q)	29	
UNDEFINED	30 THROUGH 31	

DFI	NAME	DEFINITION
434	EMISSION POLARIZATION	THE POLARIZATION OF AN EMISSION.

DATA STANDARD USAGE: Link 16	STATUS:
------------------------------	---------

DUI NAME	EXPLANATION	APPLICABILITY
001 POLARIZATION [3 BIT] (PLR)	DESCRIBES THE POLARIZATION OF ES EMISSIONS.	J14.0C4

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
CIRCULAR	1	
HORIZONTAL	2	
ROTATING	3	
VERTICAL	4	
SLANT	5	
UNDEFINED	6 THROUGH 7	

DFI NAME DEFINITION
435 PULSE DURATION THE TIME DURATION, IN MICROSECONDS, BETWEEN THE HALF POWER POINTS (.707 VOLTAGE POINTS) OF THE ENVELOPE OF THE RADIO FREQUENCY PULSE OF AN ELECTRONIC EMITTER.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
006 PULSE WIDTH [14 BIT]	IDENTIFIES THE PULSE WIDTH OF ES EMISSIONS.	J14.0C4

DATA ITEM	BIT CODE	EXPLANATION
-----------	----------	-------------

----- FOR DUI 006 -----

NO STATEMENT	0	
0.05 THROUGH 819.15 MICROSECONDS	1 THROUGH 16383	IN 0.05 MICROSECOND INCREMENTS.

DFI NAME
440 PULSE REPETITION FREQUENCY

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 EMITTER PRF [3 BIT]	DEFINES THE PULSE REPETITION FREQUENCY OF THE TARGET EMITTER.	J12.6C2 J12.7E1
006 PULSE REPETITION FREQUENCY [23 BIT]	THE RATE AT WHICH PULSES OR PULSE GROUPS ARE TRANSMITTED.	J14.0C4 J14.2C8

DATA ITEM	BIT CODE	EXPLANATION
-----------	----------	-------------

----- FOR DUI 001 -----

NO STATEMENT	0
LOW (>0 <4 KHZ)	1
MEDIUM (>=4 <20 KHZ)	2
HIGH (>=20 <300 KHZ)	3
MISSILE COMPATIBLE (>=300 KHZ)	4
UNDEFINED	5 THROUGH 7

----- FOR DUI 006 -----

UNKNOWN/NO STATEMENT	0	
0.1 THROUGH 838,860.6 PULSES PER SECOND	1 THROUGH 8388606	PULSES PER SECOND IN ONE TENTH OF A PULSE PER SECOND INCREMENTS.
131,071 PULSES PER SECOND OR GREATER	8388607	TRANSMITTED ONLY BY A DATA FORWARDER.

DFI	NAME	DEFINITION
441	TIME SLOT NUMBER	IDENTIFIES A SPECIFIC TIME SLOT WITHIN THE SET OF 98,304 OR 65,536 TIME SLOTS PER 12.8 MINUTE EPOCH DEPENDING ON THE RANGE OPTION SELECTED, NORMAL OR EXTENDED.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
003 TIME SLOT NUMBER, NET STATUS PARTICIPATION GROUP [15 BIT]		J1.5E0
010 TIME SLOT NUMBER, CURRENT [15 BIT]		J0.0C1
021 TIME SLOT NUMBER, INDEX [15 BIT]		J0.3E0 J0.4E0
031 TIME SLOT NUMBER, RTT-B [5 BIT]	SPECIFIES THE INDEX NUMBER OF THE RTT-B TIME SLOT ASSIGNMENT, WHICH MUST INCLUDE ONE OF THE FIRST 96 SLOTS IN THE EPOCH IN THE BLOCK.	J0.0I
032 TIME SLOT NUMBER, VOICE A [4 BIT]	SPECIFIES THE INDEX NUMBER OF THE VOICE A TIME SLOT ASSIGNMENT, WHICH MUST INCLUDE ONE OF THE FIRST 48 TIME SLOTS IN THE EPOCH IN THE BLOCK.	J0.0I
033 TIME SLOT NUMBER, PPLI A [7 BIT]		J0.0E0
034 TIME SLOT NUMBER, PPLI B 1 [7 BIT]		J0.0E0
035 TIME SLOT NUMBER, PPLI B 2 [7 BIT]		J0.0E0
036 TIME SLOT NUMBER, CONTROL [7 BIT]		J0.0E0
040 TIME SLOT NUMBER, NEW [15 BIT]	SPECIFIES THE NEW NUMBER OF THE TIME SLOT AT THE TIME OF EXECUTION.	J0.2I

DFI NAME
441 TIME SLOT NUMBER

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 033-036 -----		
NUMERIC	0 THROUGH 127	IN 1 NUMBER INCREMENTS.
----- FOR DUIS 003, 010, 021, AND 040 -----		
NUMERIC	0 THROUGH 32767	IN 1 NUMBER INCREMENTS.
----- FOR DUI 031 -----		
NUMERIC	0 THROUGH 31	IN 1 NUMBER INCREMENTS.
----- FOR DUI 032 -----		
NUMERIC	0 THROUGH 15	IN 1 NUMBER INCREMENTS.

DFI NAME DEFINITION
442 TIME CORRECTION A TIME CORRECTION FACTOR USED TO UPDATE TERMINAL CLOCKS.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME EXPLANATION APPLICABILITY

002 RESIDUAL TIME CHANGE SPECIFIES THE ELAPSED TIME OF THE J0.2I
[18 BIT] NEW TIME SLOT AT THE TIME OF
EXECUTION.

DATA ITEM BIT CODE EXPLANATION

----- FOR DUI 002 -----

SPECIFIES TIME SHIFT OF THE TIME
SLOT BOUNDARY AS PLUS OR MINUS
3.90625 MILLISECONDS. WHEN THIS
VALUE IS POSITIVE IT SPECIFIES THE
ELAPSED TIME OF THE NEW TIME SLOT
AT THE TIME OF EXECUTION. WHEN
THIS VALUE IS NEGATIVE IT
SPECIFIES THE TIME REMAINING IN
THE PREVIOUS TIME SLOT AT THE TIME
OF EXECUTION BEFORE THE NEW TIME
SLOT BOUNDARY. IN 50 NANOSECOND
INCREMENTS.

0 THROUGH 3.90625 MILLISECONDS	0 THROUGH 78125
ILLEGAL	78126 THROUGH 184018
-3.90625 MILLISECONDS	184019 THROUGH 262143
THROUGH -50 NANoseconds	

DFI	NAME	DEFINITION
444	RECURRENCE RATE	EXPRESSES A NUMBER 'N' WHICH, AS PART OF A TIME SLOT ASSIGNMENT, ESTABLISHES THE NUMBER OF ASSIGNED TIME SLOTS SPACED UNIFORMLY OVER EACH EPOCH.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 RECURRENCE RATE [4 BIT]	EXPRESSES A NUMBER 'N' WHICH, AS PART OF A TIME SLOT ASSIGNMENT, ESTABLISHES THE NUMBER OF ASSIGNED TIME SLOTS SPACED UNIFORMLY OVER EACH EPOCH.	J0.3E0 J0.4E0
002 RECURRENCE RATE, 1 [4 BIT]	EXPRESSES A NUMBER 'N' WHICH, AS PART OF A TIME SLOT ASSIGNMENT, ESTABLISHES THE NUMBER OF ASSIGNED TIME SLOTS SPACED UNIFORMLY OVER EACH EPOCH.	J0.6C1
003 RECURRENCE RATE, 2 [4 BIT]	EXPRESSES A NUMBER 'N' WHICH, AS PART OF A TIME SLOT ASSIGNMENT, ESTABLISHES THE NUMBER OF ASSIGNED TIME SLOTS SPACED UNIFORMLY OVER EACH EPOCH.	J0.6C1
004 RECURRENCE RATE, 4 [4 BIT]	EXPRESSES A NUMBER 'N' WHICH, AS PART OF A TIME SLOT ASSIGNMENT, ESTABLISHES THE NUMBER OF ASSIGNED TIME SLOTS SPACED UNIFORMLY OVER EACH EPOCH.	J0.6C1
005 RECURRENCE RATE, 3 [4 BIT]	EXPRESSES A NUMBER 'N' WHICH, AS PART OF A TIME SLOT ASSIGNMENT, ESTABLISHES THE NUMBER OF ASSIGNED TIME SLOTS SPACED UNIFORMLY OVER EACH EPOCH.	J0.6C1
013 RECURRENCE RATE INDICATOR [4 BIT]	INDICATES THAT THE MESSAGE IS TO BE RETRANSMITTED IN THE TIME SLOT SPECIFIED BY THE RECURRENCE RATE NUMBER.	J0.5I
014 RECURRENCE RATE, RTT-B [4 BIT]	EXPRESSES A NUMBER 'N' WHICH, AS PART OF A TIME SLOT ASSIGNMENT,	J0.0I

APPENDIX B

DFI NAME
444 RECURRENCE RATE

DUI NAME	EXPLANATION	APPLICABILITY
014 (CONTINUED)	ESTABLISHES THE NUMBER OF ASSIGNED TIME SLOTS SPACED UNIFORMLY OVER EACH EPOCH.	
015 RECURRENCE RATE, VOICE A [4 BIT]	EXPRESSES A NUMBER 'N' WHICH, AS PART OF A TIME SLOT ASSIGNMENT, ESTABLISHES THE NUMBER OF ASSIGNED TIME SLOTS SPACED UNIFORMLY OVER EACH EPOCH.	J0.0I
016 RECURRENCE RATE, PPLI A [4 BIT]	EXPRESSES A NUMBER 'N' WHICH, AS PART OF A TIME SLOT ASSIGNMENT, ESTABLISHES THE NUMBER OF ASSIGNED TIME SLOTS SPACED UNIFORMLY OVER EACH EPOCH.	J0.0E0
017 RECURRENCE RATE, PPLI B 1 [4 BIT]	EXPRESSES A NUMBER 'N' WHICH, AS PART OF A TIME SLOT ASSIGNMENT, ESTABLISHES THE NUMBER OF ASSIGNED TIME SLOTS SPACED UNIFORMLY OVER EACH EPOCH.	J0.0E0
018 RECURRENCE RATE, PPLI B 2 [4 BIT]	EXPRESSES A NUMBER 'N' WHICH, AS PART OF A TIME SLOT ASSIGNMENT, ESTABLISHES THE NUMBER OF ASSIGNED TIME SLOTS SPACED UNIFORMLY OVER EACH EPOCH.	J0.0E0
019 RECURRENCE RATE, CONTROL [4 BIT]	EXPRESSES A NUMBER 'N' WHICH, AS PART OF A TIME SLOT ASSIGNMENT, ESTABLISHES THE NUMBER OF ASSIGNED TIME SLOTS SPACED UNIFORMLY OVER EACH EPOCH.	J0.0E0
020 RECURRENCE RATE, RESPONSE [4 BIT]	EXPRESSES A NUMBER 'N' WHICH, AS PART OF A TIME SLOT ASSIGNMENT, ESTABLISHES THE NUMBER OF ASSIGNED TIME SLOTS SPACED UNIFORMLY OVER EACH EPOCH.	J1.0I

DFI NAME
444 RECURRENCE RATE

DUI NAME	EXPLANATION	APPLICABILITY
021 RECURRENCE RATE, UPDATE [2 BIT] (RRN UPD)	A FACTOR WHICH REDUCES THE GIVEN RECURRENCE RATE TO PROVIDE A SLOWER RECURRENCE OF THE CONNECTIVITY STATUS MESSAGE. A FACTOR OF ZERO MEANS NO UPDATE REQUIRED.	J1.0I
022 RECURRENCE RATE, NET STATUS PARTICIPATION GROUP [4 BIT] (RRN NSN)	EXPRESSES A NUMBER 'N' WHICH, AS PART OF A TIME SLOT ASSIGNMENT, ESTABLISHES THE NUMBER OF ASSIGNED TIME SLOTS SPACED UNIFORMLY OVER EACH EPOCH.	J1.5E0
023 OVERALL RECURRENCE RATE, NET STATUS PARTICIPATION GROUP [4 BIT] (RRN ONS)	EXPRESSES A NUMBER 'N' WHICH, AS PART OF A TIME SLOT ASSIGNMENT, ESTABLISHES THE NUMBER OF ASSIGNED TIME SLOTS SPACED UNIFORMLY OVER EACH EPOCH.	J1.5E0
025 RECURRENCE RATE, RECEIPT/ COMPLIANCE [4 BIT] (RRN R/C)	IDENTIFIES THE TIME SLOT IN WHICH THE RECEIPT/COMPLIANCE FOR THE MESSAGE IS TO BE TRANSMITTED.	J0.3I J0.4I J0.6I J1.5I J1.6I J8.0I J9.0I J9.1I J10.3I J12.0I J12.1E0 J12.4I J14.2I J31.0I J31.1I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001-005, 014-020, AND 022-023 -----		
1 TIME SLOT PER EPOCH	0	EXPRESSED AS A POWER OF 2, I.E. BIT CODE 1=2 TO THE FIRST POWER, BIT CODE 2=2 TO THE SECOND POWER, ETC.
2 THROUGH 32,768 TIME SLOTS PER EPOCH	1 THROUGH 15	
----- FOR DUI 013 -----		
RECURRENCE RATE NUMBER	0 THROUGH 15	

APPENDIX B

DFI NAME
444 RECURRENCE RATE

DATA ITEM (CONTINUED)
----- FOR DUI 021 -----

RECURRENCE RATE FACTOR

BIT CODE

0 THROUGH 3

EXPLANATION

A FACTOR WHICH REDUCES THE GIVEN
RECURRENCE RATE TO PROVIDE A
SLOWER RECURRENCE OF THE
CONNECTIVITY STATUS MESSAGE. A
FACTOR OF ZERO MEANS NO UPDATE
REQUIRED.

----- FOR DUI 025 -----

NO STATEMENT
NUMERIC

0
1 THROUGH 15

THE NUMERIC VALUE FOR RECEIPT/
COMPLIANCE, SPECIFIED AS
RECURRENCE RATE NUMBER, DEFINES
THE NUMBER N OF CONSECUTIVE TIME
SLOTS FROM THE ORIGINAL
TRANSMISSION TO THE DONATED TIME
SLOT: N=3X2 TO THE (15-RRN)
POWER.

DFI NAME DEFINITION
445 TEST PATTERN A SERIES OF ONES AND/OR ZEROES TRANSMITTED TO MONITOR THE
QUALITY OF THE LINK.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
004 TEST PATTERN [68 BIT]	ALTERNATING ZEROES AND ONES BEGIN- NING WITH ZERO IN BIT NUMBER 02.	J0.1E0
005 TEST PATTERN, 1 [63 BIT]	ALTERNATING ZEROES AND ONES BEGIN- NING WITH ZERO IN BIT NUMBER 07.	J0.1C21

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 004 ----- TEST PATTERN		SEE DUI EXPLANATION.
----- FOR DUI 005 ----- TEST PATTERN		SEE DUI EXPLANATION.

DFI	NAME	DEFINITION
446	TIME SLOT ASSIGNMENT ACTION	THE WAY IN WHICH THE TIME SLOT ASSIGNMENT SHOULD BE INTERPRETED.

DATA STANDARD USAGE: Link 16	STATUS:
------------------------------	---------

DUI NAME	EXPLANATION	APPLICABILITY
001 TIME SLOT ASSIGNMENT ACTION [1 BIT] (TSA ACT)	THE WAY IN WHICH THE TIME SLOT ASSIGNMENT SHOULD BE INTERPRETED.	J0.3E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
ADD	0	
DELETE	1	

DFI NAME DEFINITION
448 EPOCH SPECIFIES THE EPOCH NUMBER WITHIN A 24-HOUR DAY WHERE AN EPOCH IS 12.8 MINUTE INTERVAL, AND, THEREFORE, THERE ARE 112.5 EPOCHS PER DAY.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
002 EPOCH COUNT CURRENT [7 BIT]	SPECIFIES THE EPOCH NUMBER WITHIN A 24 HOUR DAY WHERE AN EPOCH IS A 12.8 MINUTE INTERVAL, AND, THEREFORE, THERE ARE 112.5 EPOCHS PER DAY.	J0.0C1

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 002 -----		
EPOCH NUMBER	0 THROUGH 111	IN 1 EPOCH INCREMENTS.
ILLEGAL	112 THROUGH 126	
NO STATEMENT	127	

B-372

MIL-STD-6016B
APPENDIX B

DFI	NAME	DEFINITION
449	TIME SLOT ASSIGNMENT TYPE	SPECIFIES WHETHER TIME SLOT ASSIGNMENT/DELETION PERTAINS TO TRANSMIT OR RECEIVE TIME SLOTS.

DATA STANDARD USAGE: Link 16	STATUS:
------------------------------	---------

DUI NAME	EXPLANATION	APPLICABILITY
001 TIME SLOT ASSIGNMENT TYPE [1 BIT] (TSA TYP)		J0.3E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
TRANSMIT TIME SLOT ACTION	0	
RECEIVE TIME SLOT ACTION	1	

DFI NAME DEFINITION
501 OPERATIONAL FUNCTION DEFINES AN OPERATIONAL FUNCTION.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 DUTY ASSIGNMENT FUNCTIONAL AREA [4 BIT]	DEFINES THE FUNCTIONAL AREA WITHIN WHICH A DUTY ASSIGNMENT IS MADE.	J9.0E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
COMMAND	1	
ANTIAIR WARFARE	2	
ANTISUBMARINE WARFARE	3	
ANTISURFACE WARFARE	4	
ELECTRONIC WARFARE	5	
AMPHIBIOUS WARFARE	6	
DATA COMPILATION	7	
AIR COORDINATION/CONTROL	8	
SPECIAL DUTIES	9	
JOINT SURVEILLANCE AND TARGET ATTACK RADAR SYSTEM (JSTARS)	10	
THEATER MISSILE DEFENSE (TMD)	11	
UNDEFINED	12 THROUGH 15	

DFI NAME
549 REPORT INDICATOR

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 PERIODIC REPORT INDICATOR [2 BIT] (PER IND)	INDICATES THE TYPE OF REPORT.	J3.0I J3.5I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
ORIGINAL/CHANGE	1	THIS IS AN ORIGINAL MESSAGE OR A MESSAGE TRANSMITTED BECAUSE OF DATA CHANGE.
PERIODIC	2	THIS IS A PERIODIC UPDATE.
UNDEFINED	3	

DFI	NAME	DEFINITION
601	AMPLIFICATION	INDICATES ADDITIONAL INFORMATION ON THE ENVIRONMENT/CATEGORY BEING REPORTED IN THE MESSAGE.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 AIR AMPLIFICATION [5 BIT]	INDICATES ADDITIONAL INFORMATION ON THE AIR ENVIRONMENT/CATEGORY BEING REPORTED IN THE MESSAGE.	J3.0C5
002 SURFACE (MARITIME) AMPLIFICATION [5 BIT]	INDICATES ADDITIONAL INFORMATION ON THE SURFACE (MARITIME) ENVIRONMENT/CATEGORY BEING REPORTED IN THE MESSAGE.	J3.0C5
003 SUBSURFACE (MARITIME) AMPLIFICATION [5 BIT]	INDICATES ADDITIONAL INFORMATION ON THE SUBSURFACE (MARITIME) ENVIRONMENT/CATEGORY BEING REPORTED IN THE MESSAGE.	J3.0C5
004 LAND (GROUND) AMPLIFICATION [5 BIT]	INDICATES ADDITIONAL INFORMATION ON THE LAND (GROUND) ENVIRONMENT/CATEGORY BEING REPORTED IN THE MESSAGE.	J3.0C5
005 SPACE AMPLIFICATION [5 BIT]	INDICATES ADDITIONAL INFORMATION ON THE SPACE ENVIRONMENT/CATEGORY BEING REPORTED IN THE MESSAGE.	J3.0C5 J3.6E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001, 002, AND 004 -----		
NO STATEMENT	0	
UNDEFINED	1 THROUGH 31	
----- FOR DUI 003 -----		
NO STATEMENT	0	
MK-50	1	
MK-46 ADVANCED SHALLOW	2	
UNDEFINED	3 THROUGH 31	

DFI NAME
601 AMPLIFICATION

DATA ITEM (CONTINUED) ----- FOR DUI 005 -----	BIT CODE	EXPLANATION
NO STATEMENT	0	
UNITARY HIGH EXPLOSIVE WARHEAD	1	SINGLE CHARGE HIGH EXPLOSIVE WARHEAD.
NUCLEAR WARHEAD	2	
BULK CHEMICAL WARHEAD	3	SINGLE WARHEAD (CHEMICAL).
BULK BIOLOGICAL WARHEAD	4	SINGLE WARHEAD (BIOLOGICAL).
FUEL-AIR EXPLOSIVE WARHEAD	5	
DEBRIS	6	
WARHEAD	7	
PENETRATION AID	8	DECOY, CHAFF, ETC.
HIGH EXPLOSIVE	9	MULTIPLE HIGH EXPLOSIVE BOMBLETS DISPERSED IN FLIGHT.
SUBMUNITION WARHEAD		
CHEMICAL SUBMUNITION WARHEAD	10	MULTIPLE CHEMICAL BOMBLETS DISPERSED IN FLIGHT.
BIOLOGICAL SUBMUNITION WARHEAD	11	MULTIPLE BIOLOGICAL BOMBLETS DISPERSED IN FLIGHT.
UNDEFINED	12 THROUGH 30	
RESET TO NO STATEMENT	31	

B-377

MIL-STD-6016B
APPENDIX B

DFI NAME DEFINITION
700 WEAPON SYSTEM TYPE SPECIFIES THE SPECIFIC WEAPON SYSTEM TO BE USED IN ENGAGING A
TARGET.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME EXPLANATION APPLICABILITY

001 WEAPON ID
[5 BIT] DEFINES THE IDENTIFICATION NUMBER J12.6C6
OF THE SELECTED WEAPON.

002 WEAPON SYSTEM
[5 BIT] J10.2I J12.6C1

DATA ITEM BIT CODE EXPLANATION

----- FOR DUI 001 -----

NO STATEMENT 0
WEAPON 1 THROUGH 31 1 THROUGH 31
DEFINES THE AIR-TO-AIR OR AIR-TO-
GROUND MISSILE IDENTIFICATION
NUMBER THAT HAS BEEN SELECTED FOR
USE AGAINST THE TARGET.

----- FOR DUI 002 -----

NO STATEMENT 0
SURFACE-TO-AIR MISSILE 1
(SAM)
SURFACE-TO-SURFACE 2
MISSILE (SSM)
AIRCRAFT 3
CONVENTIONAL (SHORT 4
RANGE MISSILE OR GUNS)
ANTISUBMARINE WARFARE 5
HELICOPTER
ANTISUBMARINE WARFARE 6
MISSILE
DEPTH CHARGE/DEPTH BOMB 7
TORPEDO 8
FIXED WING ANTISUBMARINE 9
WARFARE AIRCRAFT
LASER 10
BEAM WEAPON 11
INFRARED DECOY 12
CHAFF 13

MIL-STD-6016B
APPENDIX B

DFI NAME
700 WEAPON SYSTEM TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
SPOT JAMMER	14	
BARRAGE JAMMER	15	
DECEPTION JAMMER	16	
INTERCEPTOR	17	
AIR-TO-SURFACE MISSILE (ASM)	18	
UNDEFINED	19 THROUGH 31	

DFI	NAME	DEFINITION
701	COMMAND MISSION	SPECIFIES THE MISSION TO BE CONDUCTED.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
002 COMMAND MISSION [5 BIT]		J9.0E0

DATA ITEM	BIT CODE	EXPLANATION
-----------	----------	-------------

----- FOR DUI 002 -----

HOLD DOWN	0
SEARCH AND RESCUE	1
RENDEZVOUSING	2
IDENTIFICATION	3
SAFEGUARD	4
ASW SEARCH	5
SCREEN	6
PROCEDURE 1	7
PROCEDURE 2	8
PROCEDURE 3	9
PROCEDURE 4	10
PROCEDURE 5	11
PROCEDURE 6	12
PROCEDURE 7	13
PROCEDURE 8	14
PROCEDURE 9	15
PROCEDURE 10	16
PROCEDURE 11	17
PROCEDURE 12	18
PROCEDURE 13	19
PROCEDURE 14	20
PROCEDURE 15	21
PROCEDURE 16	22
PROCEDURE 17	23
PROCEDURE 18	24
PROCEDURE 19	25
PROCEDURE 20	26
CLOSE AIR SUPPORT	27
ARMED RECONNAISSANCE	28
AERIAL RECONNAISSANCE	29
SUPPRESSION OF ENEMY AIR DEFENSES (SEAD)	30

B-380

DFI NAME
701 COMMAND MISSION

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
NO STATEMENT	31	

DFI NAME
702 DUTY ASSIGNMENT

DEFINITION
THE FUNCTIONS OR DUTIES ASSIGNED TO A UNIT OR ELEMENT.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
----------	-------------	---------------

002 DUTY ASSIGNMENT [6 BIT]	DEFINES, IN CONJUNCTION WITH DUTY ASSIGNMENT FUNCTIONAL AREA, THE FUNCTIONS OR DUTIES ASSIGNED TO A UNIT OR ELEMENT.	J9.0E0
--------------------------------	---	--------

DATA ITEM	BIT CODE	EXPLANATION
-----------	----------	-------------

----- FOR DUI 002 -----

FOR NO STATEMENT (0)

ILLEGAL NO STATEMENT	0 THROUGH 62 63
-------------------------	--------------------

FOR COMMAND (1)

OFFICER IN TACTICAL COMMAND (OTC)	0
COMPOSITE WARFARE COMMANDER (CWC)	1
SCREEN COMMANDER (SC)	2
UNDEFINED	3 THROUGH 62
NO STATEMENT	63

FOR ANTIAIR WARFARE (2)

AAW COMMANDER (AAWC)	0
SECTOR AAW COORDINATOR (SAAWC)	1
LOCAL AAW COORDINATOR (LAAWC)	2
AAW PICKET (WATCHDOG)	3
TOMCAT	4

DFI NAME
702 DUTY ASSIGNMENT

DATA ITEM (CONTINUED)

FOR ANTIAIR WARFARE (2)

UNDEFINED
NO STATEMENT

BIT CODE
(CONTINUED)

5 THROUGH 62
63

EXPLANATION

FOR ANTISUBMARINE
WARFARE (3)

ASW COMMANDER (ASWC)
SECTOR ASW COMMANDER
(SASWC)
LOCAL ASW COMMANDER
(LASWC)
SEARCH AND ATTACK UNIT
COMMANDER (SAUC)
SSN LINK SHIP
SUBMARINE ELEMENT
COORDINATOR (SEC)
UNDEFINED
NO STATEMENT

0
1
2
3
4
5

6 THROUGH 62
63

FOR ANTISURFACE WARFARE
(4)

ASUW COMMANDER (ASUWC)
SECTOR ASUW COMMANDER
(SASUWC)
SURFACE ACTION GROUP
COMMANDER (SAGC)
HELICOPTER ATTACK
GROUP COMMANDER (HAGC)
SENIOR OFFICER FPB
(SOFPB)
SURFACE PICKET
UNDEFINED

0
1
2
3
4
5
6 THROUGH 62

DFI NAME
702 DUTY ASSIGNMENT

DATA ITEM (CONTINUED) ----- FOR ANTISURFACE WARFARE (4) -----	BIT CODE (CONTINUED)	EXPLANATION
NO STATEMENT	63	
----- FOR ELECTRONIC WARFARE (5) -----		
EW COORDINATOR (EWC)	0	
CHAFF GUARDSHIP	1	
UNDEFINED	2 THROUGH 62	
NO STATEMENT	63	
----- FOR AMPHIBIOUS WARFARE (6) -----		
SUPPORTING ARMS COORDINATION CENTER (SACC)	0	
TACTICAL AIR COORDINATION CENTER (TACC)	1	
PRIMARY CONTROL SHIP (PCS)	2	
SECONDARY CONTROL SHIP (SCS)	3	
HELO CONTROL SHIP (HCS)	4	
HELO DIRECTION CENTER (HDC)	5	
BOAT HAVEN, SPECIFIC BEACH COLOR	6	
PRIMARY CASUALTY RECEIVING AND EVACUATION CONTROL SHIP (PCRS)	7	

DFI NAME
702 DUTY ASSIGNMENT

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
----- FOR AMPHIBIOUS WARFARE (6) -----	(CONTINUED)	
SECONDARY CASUALTY RECEIVING AND EVACUATION CONTROL SHIP (SCRS)	8	
CENTRAL CONTROL SHIP (CCS)	9	
DIRECT SUPPORT NAVAL GUNFIRE SUPPORT SHIP (DSNGSS)	10	
GENERAL SUPPORT NAVAL GUNFIRE SUPPORT SHIP (GNSNGSS)	11	
UNDEFINED NO STATEMENT	12 THROUGH 62 63	
----- FOR DATA COMPILATION (7) -----		
FORCE TRACK COORDINATOR AIR (FTC-A)	0	
FORCE TRACK COORDINATOR SUBSURFACE (FTC-SS)	1	
FORCE TRACK COORDINATOR SURFACE (FTC-S)	2	
GRID REFERENCE UNIT (GRU)	3	
LINK 11 DATA NET CONTROL STATION (LINK 11 DNCS)	4	
LINK 11 BROADCAST UNIT	5	
LINK 10 DATA NET CONTROL STATION (L10 DNCS)	6	
LINK 4A CONTROL UNIT (LINK 4A CU)	7	

B - 385

MIL-STD-6016B
APPENDIX B

DFI NAME
702 DUTY ASSIGNMENT

DATA ITEM (CONTINUED) ----- FOR DATA COMPILATION (7) -----	BIT CODE (CONTINUED)	EXPLANATION
LINK 10/LINK 11 GATEWAY UNIT	8	
LINK 14 BROADCAST UNIT	9	
LINK 16 NETWORK MANAGER	10	
LINK 16 STANDBY NETWORK MANAGER	11	
LINK 16 SUB-NETWORK MANAGER	12	
LINK 16 NETWORK TIME REFERENCE (LINK 16 NTR)	13	
LINK 16 NAVIGATION CONTROLLER (LINK 16 NC)	14	
LINK 16 POSITION REFERENCE (LINK 16 PR)	15	
LINK 16 NET CONTROL STATION (LINK 16 NCS)	16	
LINK 16 INITIAL ENTRY MIDS UNIT	17	
LINK 16 CRYPTONET MANAGER	18	
FORWARDING MIDS UNIT A	19	
FORWARDING MIDS UNIT B	20	
FORWARDING MIDS UNIT AB	21	
IJMS NET MANAGEMENT STATION	22	
IJMS NET TIME REFERENCE	23	
UNDEFINED	24 THROUGH 62	
NO STATEMENT	63	

B-386

MIL-STD-6016B
APPENDIX B

DFI NAME
702 DUTY ASSIGNMENT

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
----- FOR AIR COORDINATION/ CONTROL (8) -----		
AIR COORDINATOR (AC)	0	
FORCE MARSHALLER (FM)	1	
AIR RESOURCE ELEMENT COORDINATOR (AREC)	2	
HELICOPTER ELEMENT COORDINATOR (HEC)	3	
HELICOPTER CONTROL UNIT (HCU)	4	
ASW AIRCRAFT CONTROL UNIT (ASWACU)	5	
AAW AIRCRAFT CONTROL UNIT (AAWACU)	6	
ATTACK AIRCRAFT CONTROL UNIT (AACU)	7	
AEW CONTROL UNIT (AEWCU)	8	
AIR CONTROL UNIT (ACU)	9	
UNDEFINED	10 THROUGH 62	
NO STATEMENT	63	
----- FOR SPECIAL DUTIES (9) -----		
AIRSTRIKE SAFETY SHIP (SAFETY CELL)	0	
BALLISTIC WINDFINDING GUARDSHIP	1	
BATHYTHERMOGRAPHIC GUARD	2	
CONSORT	3	
CONTROL SHIP	4	
DECEPTION GROUP COMMANDER (DCGC)	5	
DELIVERING SHIP	6	
DISABLED SHIP	7	
DUTY CARRIER	8	

B-387

MIL-STD-6016B
APPENDIX B

DFI NAME
702 DUTY ASSIGNMENT

DATA ITEM (CONTINUED) ----- FOR SPECIAL DUTIES (9) -----	BIT CODE (CONTINUED)	EXPLANATION
EMERGENCY LANDING	9	
CARRIER		
FIRING SHIP	10	
FLANK MARKING OR RAKE	11	
SHIP		
GOALKEEPER ON HVU	12	
HOST SHIP	13	
IFF GUARDSHIP	14	
ILLUMINATING SHIP	15	
MAINBODY GROUP COMMANDER (MBGC)	16	
MAN OVERBOARD RECOVERY	17	
SHIP		
MEDICAL GUARD	18	
METEOROLOGICAL GUARD	19	
MILITARY GUARD	20	
NET CONTROL STATION	21	
(NCS)		
OFFICER CONDUCTING	22	
EXERCISE (OCE)		
OFFICER CONDUCTING	23	
SERIAL (OCS)		
PHYSICAL BARRIER	24	
RADAR GUARDSHIP	25	
RADAR PICKET	26	
RADHAZ RELAY	27	
RADIO LINK	28	
READY DUTY SHIP	29	
RECEIVING SHIP	30	
RECOVERY SHIP	31	
REPLENISHMENT UNIT GUIDE	32	
RESCUE DESTROYER	33	
SCENE OF ACTION	34	
COMMANDER (SAC)		
SEARCH AND RESCUE (SAR)	35	
SHIP		

B-388

DFI NAME
702 DUTY ASSIGNMENT

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
-----	(CONTINUED)	
FOR SPECIAL DUTIES (9)		

SENIOR OFFICER PRESENT	36	
AFLOAT (SOPA)		
TACAN GUARD	37	
TARGET SHIP	38	
TATTLETALE	39	
TOWING SHIP	40	
UNDERWAY REPLENISHMENT	41	
GROUP COMMANDER (URGC)		
UNIT RESPONSIBLE FOR	42	
SURFACING THE		
SUBMARINE		
VISUAL COMMUNICATION	43	
DUTY SHIP FOR SHIP		
ALONGSIDE		
VISUAL LINK BETWEEN	44	
SHIPS INDICATED		
WEAPON-CARRYING	45	
HELICOPTER STANDBY		
SHIP		
WEATHER BALLOON TRACKING	46	
SHIP		
UNDEFINED	47 THROUGH 62	
NO STATEMENT	63	

FOR JOINT SURVEILLANCE		
TARGET ATTACK RADAR		
SYSTEM (JSTARS) (10)		

UNDEFINED	0 THROUGH 62	
NO STATEMENT	63	

DFI NAME
702 DUTY ASSIGNMENT

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
----- FOR THEATER MISSILE DEFENSE (TMD) (11) -----		
UNDEFINED NO STATEMENT	0 THROUGH 62 63	
----- FOR UNDEFINED (12-15) -----		
UNDEFINED NO STATEMENT	0 THROUGH 62 63	

DFI NAME DEFINITION
704 DISCRETE MESSAGE SEVERAL MESSAGES IN LINK 4A AND IJMS CONVEY DISCRETE
INFORMATION THAT VARIES WITH THE MESSAGE TYPE.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
004 DROP DISCRETE [1 BIT] (DRP DIS)	PROVIDES AN AUTOMATIC AIR-TO-GROUND WEAPON DROP COMMAND.	J12.2I
021 STATUS INFORMATION DISCRETE [4 BIT]	PROVIDES TARGET SORTING INFORMATION.	J12.6I

DATA ITEM	BIT CODE	EXPLANATION
-----------	----------	-------------

----- FOR DUI 004 -----

NO ACTION REQUIRED	0	
DROP WEAPON	1	

----- FOR DUI 021 -----

FOR ENV/CAT = 0, NO
STATEMENT/UNKNOWN; ENV/
CAT = 1, SPACE; AND ENV/
CAT = 4, SUBSURFACE
(MARITIME)

NO STATEMENT	0	
UNDEFINED	1 THROUGH 15	

FOR ENV/CAT = 2, AIR

NO STATEMENT	0	UPDATES TARGET/TRACK DATA.
ENGAGING	1	THE SOURCE TN IS ENGAGING THE SPECIFIED AIR TRACK/TARGET.
INVESTIGATING	2	THE SOURCE TN IS INVESTIGATING THE SPECIFIED AIR TRACK/TARGET.
MISSILE IN FLIGHT/WEAPON RELEASED	3	THE SOURCE TN HAS LAUNCHED A MISSILE/RELEASED A WEAPON AGAINST THE SPECIFIED AIR TRACK/

DFI NAME
704 DISCRETE MESSAGE

DATA ITEM (CONTINUED)

FOR ENV/CAT = 2, AIR

BIT CODE
(CONTINUED)

EXPLANATION

(CONTINUED)
NEW SENSOR TARGET REPORT

4

TARGET.
THE SOURCE TN SHALL TRANSMIT THIS
STATUS INFORMATION DISCRETE AT
LEAST ONCE TO INDICATE THIS REPORT
IS A NEW SENSOR TARGET.
SUBSEQUENT PERIODIC
TRANSMISSIONS OF THE J12.6 MESSAGE
WILL BE WITH THE APPLICABLE STATUS
INFORMATION DISCRETE VALUE SET.

CANCEL SENSOR TARGET
REPORT

5

THE SOURCE TN SHALL TRANSMIT THIS
STATUS INFORMATION DISCRETE AT
LEAST ONCE TO INDICATE IT IS NO
LONGER REPORTING THE SPECIFIED
TRACK/TARGET.

TRACK/TARGET DESTROYED

6

THE SOURCE TN SHALL TRANSMIT THIS
STATUS INFORMATION DISCRETE TO
INDICATE THE AIR TRACK/TARGET
HAS BEEN DESTROYED AND IS NO
LONGER A THREAT. THIS STATUS
INFORMATION DISCRETE SHALL BE
TRANSMITTED UNTIL SENSOR CONTACT
IS CANCELLED/LOST. FOR A TARGET
NOT HELD ON OWN SENSOR, THIS
STATUS INFORMATION DISCRETE SHALL
BE TRANSMITTED AT LEAST TWICE.

DISENGAGING

7

THE SOURCE TN SHALL TRANSMIT THIS
STATUS INFORMATION DISCRETE AT
LEAST TWICE TO INDICATE A
DISENGAGEMENT OF THE
SPECIFIED AIR TRACK/TARGET.
THE SOURCE TN SHALL THEN
TRANSMIT THE APPROPRIATE STATUS
INFORMATION DISCRETE VALUE.

TARGET PARTIALLY
DESTROYED

8

THE SOURCE TN SHALL TRANSMIT THIS
STATUS INFORMATION DISCRETE AT
LEAST TWICE TO INDICATE THAT THE
TARGET IS PARTIALLY DESTROYED.

B-392

MIL-STD-6016B
APPENDIX B

APPENDIX B

DFI NAME
704 DISCRETE MESSAGE

DATA ITEM (CONTINUED)

FOR ENV/CAT = 2, AIR

BIT CODE
(CONTINUED)

EXPLANATION

(CONTINUED)

HEADS UP

9

THE SOURCE TN SHALL THEN REVERT TO
SID = 0 IF THE TARGET/TRACK IS
STILL HELD ON A SENSOR.
THE SOURCE TN SHALL TRANSMIT THIS
STATUS INFORMATION DISCRETE TO
ALERT OTHER UNITS THAT THE TARGET
CONSTITUTES A THREAT TO FRIENDLY
FORCES. THE SOURCE TN IS UNABLE
TO ASSURE COMPLETE DESTRUCTION.
THIS VALUE DOES NOT REPORT EITHER
AN ENGAGEMENT OR THE BREAKING OF
AN ENGAGEMENT.

LOCK ON/PRIMARY
DESIGNATED TARGET

10

THE SOURCE TN SHALL TRANSMIT THIS
STATUS INFORMATION DISCRETE TO
INDICATE A SENSOR ACQUISITION
HAS BEEN OBTAINED ON THE SPECIFIED
AIR TRACK/TARGET AND/OR THE TARGET
IS THE PDT.

NOT EFFECTIVE

11

THE SOURCE TN SHALL TRANSMIT THIS
STATUS INFORMATION DISCRETE AT
LEAST TWICE TO INDICATE A MISS OR
ABORT ON THE SPECIFIED AIR TRACK/
TARGET. THE SOURCE TN SHALL
CONTINUE THE ENGAGEMENT.

COVERING

12

THE SOURCE TN IS COVERING THE
SPECIFIED AIR TRACK/TARGET.

INVESTIGATE

13

THE SOURCE TN SHALL TRANSMIT THIS
STATUS INFORMATION DISCRETE
TWICE TO A SPECIFIC ADDRESSEE TN.
THE ADDRESSEE TN SHALL TRANSMIT
STATUS INFORMATION DISCRETE VALUE
= 2 WHEN THE ORDER HAS BEEN
COMPLIED WITH.

ENGAGE

14

THE SOURCE TN SHALL TRANSMIT THIS
STATUS INFORMATION DISCRETE
TWICE TO A SPECIFIC ADDRESSEE TN.
THE ADDRESSEE TN SHALL TRANSMIT

B-393

APPENDIX B

DFI NAME
704 DISCRETE MESSAGE

DATA ITEM (CONTINUED)

FOR ENV/CAT = 2, AIR

BIT CODE
(CONTINUED)

EXPLANATION

(CONTINUED)

STATUS INFORMATION DISCRETE VALUE
= 1 WHEN THE ORDER HAS BEEN
COMPLIED WITH.
THE SOURCE TN SHALL TRANSMIT THIS
STATUS INFORMATION DISCRETE
TWICE TO A SPECIFIC ADDRESSEE TN.
THE ADDRESSEE TN SHALL CEASE
TRANSMITTING STATUS INFORMATION
DISCRETE VALUE = 1 OR 2 AND
TRANSMIT STATUS INFORMATION
DISCRETE VALUE = 7 WHEN THE
ORDER HAS BEEN COMPLIED WITH.

DISENGAGE

15

FOR ENV/CAT = 3, SURFACE
(MARITIME)

NO STATEMENT
ATTACKING

0
1

UPDATES TARGET/TRACK DATA.
THE SOURCE TN IS ATTACKING THE
SPECIFIED SURFACE (MARITIME)
TRACK/TARGET.

INVESTIGATING

2

THE SOURCE TN IS INVESTIGATING THE
SPECIFIED SURFACE (MARITIME)
TRACK/TARGET.

MISSILE IN FLIGHT/WEAPON
RELEASED

3

THE SOURCE TN HAS LAUNCHED A
MISSILE/RELEASED A WEAPON AGAINST
THE SPECIFIED SURFACE (MARITIME)
TRACK/TARGET.

NEW SENSOR TARGET REPORT

4

THE SOURCE TN SHALL TRANSMIT THIS
STATUS INFORMATION DISCRETE AT
LEAST ONCE TO INDICATE THIS REPORT
IS A NEW SENSOR TARGET.
SUBSEQUENT PERIODIC TRANSMISSIONS
OF THE J12.6 MESSAGE WILL BE WITH
THE APPLICABLE STATUS INFORMATION
DISCRETE VALUE SET.

DFI NAME
704 DISCRETE MESSAGE

DATA ITEM (CONTINUED) ----- FOR ENV/CAT = 3, SURFACE (MARITIME) -----	BIT CODE (CONTINUED)	EXPLANATION
CANCEL SENSOR TARGET REPORT	5	THE SOURCE TN SHALL TRANSMIT THE STATUS INFORMATION DISCRETE AT LEAST ONCE TO INDICATE IT IS NO LONGER REPORTING THE SPECIFIED TRACK/TARGET.
TRACK/TARGET DESTROYED	6	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE TO INDICATE THE SURFACE (MARITIME) TRACK/TARGET HAS BEEN DESTROYED AND IS NO LONGER A THREAT. THIS STATUS INFORMATION DISCRETE SHALL BE TRANSMITTED UNTIL SENSOR CONTACT IS CANCELLED/LOST. FOR A TARGET NOT HELD ON OWN SENSOR, THIS STATUS INFORMATION DISCRETE SHALL BE TRANSMITTED AT LEAST TWICE.
DISENGAGING	7	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE AT LEAST TWICE TO INDICATE A DISENGAGEMENT OF THE SPECIFIED SURFACE (MARITIME) TRACK/TARGET. THE SOURCE TN SHALL THEN TRANSMIT THE APPROPRIATE STATUS INFORMATION DISCRETE VALUE.
TARGET PARTIALLY DESTROYED	8	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE AT LEAST TWICE TO INDICATE THE TARGET IS PARTIALLY DESTROYED. THE SOURCE TN SHALL THEN REVERT TO SID = 0 IF THE TARGET/TRACK IS STILL HELD ON A SENSOR.
MARK POINT/POINT OF INTEREST	9	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE AT LEAST TWICE TO INDICATE A POINT OF INTEREST OR POTENTIAL TARGET OF

DFI NAME
704 DISCRETE MESSAGE

DATA ITEM (CONTINUED) ----- FOR ENV/CAT = 3, SURFACE (MARITIME) -----	BIT CODE (CONTINUED)	EXPLANATION
(CONTINUED) LOCK ON/DESIGNATED SURFACE TARGET	10	OPPORTUNITY. THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE TO INDICATE A SENSOR ACQUISITION HAS BEEN OBTAINED ON THE SPECIFIED SURFACE (MARITIME) TRACK/TARGET AND/OR THE TARGET IS THE DST.
BATTLE DAMAGE ASSESSMENT UNKNOWN	11	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE AT LEAST TWICE TO INDICATE THAT THE BATTLE DAMAGE IS UNKNOWN.
RECOMMEND REATTACK	12	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE AT LEAST TWICE TO RECOMMEND THAT ANOTHER MISSION BE CONDUCTED AGAINST THE TARGET.
INVESTIGATE	13	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE TWICE TO A SPECIFIC ADDRESSEE TN. THE ADDRESSEE TN SHALL TRANSMIT STATUS INFORMATION DISCRETE VALUE = 2 WHEN THE ORDER HAS BEEN COMPLIED WITH.
ENGAGE	14	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE TWICE TO A SPECIFIC ADDRESSEE TN. THE ADDRESSEE TN SHALL TRANSMIT STATUS INFORMATION DISCRETE VALUE = 1 WHEN THE ORDER HAS BEEN COMPLIED WITH.
DISENGAGE	15	THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE TWICE TO A SPECIFIC ADDRESSEE TN. THE ADDRESSEE TN SHALL CEASE TRANSMITTING STATUS INFORMATION DISCRETE VALUE = 1 OR 2 AND

B - 396

MIL-STD-6016B
APPENDIX B

DFI NAME
704 DISCRETE MESSAGE

DATA ITEM (CONTINUED)

FOR ENV/CAT = 3, SURFACE
(MARITIME)

(CONTINUED)

FOR ENV/CAT = 5, LAND
(GROUND)

NO STATEMENT
ATTACKING

INVESTIGATING

MISSILE IN FLIGHT/WEAPON
RELEASED

NEW SENSOR TARGET REPORT

CANCEL SENSOR TARGET
REPORT

TRACK/TARGET DESTROYED

BIT CODE
(CONTINUED)

0

1

2

3

4

5

6

EXPLANATION

TRANSMIT STATUS INFORMATION
DISCRETE VALUE = 7 WHEN THE ORDER
HAS BEEN COMPLIED WITH.

UPDATES TARGET/TRACK DATA
THE SOURCE TN IS ATTACKING THE
SPECIFIED LAND (GROUND)
TRACK/TARGET.
THE SOURCE TN IS INVESTIGATING THE
SPECIFIED LAND (GROUND)
TRACK/TARGET.
THE SOURCE TN HAS LAUNCHED A
MISSILE/RELEASED A WEAPON AGAINST
THE SPECIFIED LAND GROUND
TRACK/TARGET.
THE SOURCE TN SHALL TRANSMIT THIS
STATUS INFORMATION DISCRETE AT
LEAST ONCE TO INDICATE THIS REPORT
IS A NEW SENSOR TARGET.
SUBSEQUENT PERIODIC TRANSMISSIONS
OF THE J12.6 MESSAGE WILL BE WITH
THE APPLICABLE STATUS INFORMATION
DISCRETE VALUE SET.
THE SOURCE TN SHALL TRANSMIT THE
STATUS INFORMATION DISCRETE AT
LEAST ONCE TO INDICATE IT IS NO
LONGER REPORTING THE SPECIFIED
TRACK/TARGET.
THE SOURCE TN SHALL TRANSMIT THIS
STATUS INFORMATION DISCRETE TO
INDICATE THE LAND (GROUND)

B-397

APPENDIX B

MIL-STD-6016B

APPENDIX B

DFI NAME
704 DISCRETE MESSAGE

DATA ITEM (CONTINUED)

FOR ENV/CAT = 5, LAND
(GROUND)

BIT CODE
(CONTINUED)

EXPLANATION

(CONTINUED)

TRACK/TARGET HAS BEEN DESTROYED AND IS NO LONGER A THREAT. THIS STATUS INFORMATION DISCRETE SHALL BE TRANSMITTED UNTIL SENSOR CONTACT IS CANCELLED/LOST. FOR A TARGET NOT HELD ON OWN SENSOR, THIS STATUS INFORMATION DISCRETE SHALL BE TRANSMITTED AT LEAST TWICE.

DISENGAGING

7

THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE AT LEAST TWICE TO INDICATE A DISENGAGEMENT OF THE SPECIFIED LAND (GROUND) TRACK/TARGET. THE SOURCE TN SHALL THEN TRANSMIT THE APPROPRIATE STATUS INFORMATION DISCRETE VALUE.

TARGET PARTIALLY
DESTROYED

8

THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE AT LEAST TWICE TO INDICATE THE TARGET IS PARTIALLY DESTROYED. THE SOURCE TN SHALL THEN REVERT TO SID = 0 IF THE TARGET/TRACK IS STILL HELD ON A SENSOR.

MARK POINT/POINT OF
INTEREST

9

THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE AT LEAST TWICE TO INDICATE A POINT OF INTEREST OR POTENTIAL TARGET OF OPPORTUNITY.

LOCK ON/DESIGNATED
SURFACE TARGET

10

THE SOURCE TN SHALL TRANSMIT THIS STATUS INFORMATION DISCRETE TO INDICATE A SENSOR ACQUISITION HAS BEEN OBTAINED ON THE SPECIFIED LAND (GROUND) TRACK/TARGET AND/OR THE TARGET IS THE DGT.

DFI NAME
704 DISCRETE MESSAGE

DATA ITEM (CONTINUED)

FOR ENV/CAT = 5, LAND
(GROUND)

BIT CODE
(CONTINUED)

EXPLANATION

BATTLE DAMAGE ASSESSMENT
UNKNOWN

11

THE SOURCE TN SHALL TRANSMIT THIS
STATUS INFORMATION DISCRETE AT
LEAST TWICE TO INDICATE THAT THE
BATTLE DAMAGE IS UNKNOWN.

RECOMMEND REATTACK

12

THE SOURCE TN SHALL TRANSMIT THIS
STATUS INFORMATION DISCRETE AT
LEAST TWICE TO RECOMMEND THAT
ANOTHER MISSION BE CONDUCTED
AGAINST THE TARGET.

INVESTIGATE

13

THE SOURCE TN SHALL TRANSMIT THIS
STATUS INFORMATION DISCRETE TWICE
TO A SPECIFIC ADDRESSEE TN. THE
ADDRESSEE TN SHALL TRANSMIT STATUS
INFORMATION DISCRETE VALUE = 2
WHEN THE ORDER HAS BEEN COMPLIED
WITH.

ENGAGE

14

THE SOURCE TN SHALL TRANSMIT THIS
STATUS INFORMATION DISCRETE TWICE
TO A SPECIFIC ADDRESSEE TN. THE
ADDRESSEE TN SHALL TRANSMIT STATUS
INFORMATION DISCRETE VALUE = 1
WHEN THE ORDER HAS BEEN COMPLIED
WITH.

DISENGAGE

15

THE SOURCE TN SHALL TRANSMIT THIS
STATUS INFORMATION DISCRETE TWICE
TO A SPECIFIC ADDRESSEE TN. THE
ADDRESSEE TN SHALL CEASE
TRANSMITTING STATUS INFORMATION
DISCRETE VALUE = 1 OR 2 AND
TRANSMIT STATUS INFORMATION
DISCRETE VALUE = 7 WHEN THE ORDER
HAS BEEN COMPLIED WITH.

B - 399

MIL-STD-6016B
APPENDIX B

DFI NAME
705 AUTOPILOT CONTROL INDICATOR

DEFINITION
INDICATES WHETHER COMMANDS IN AIRCRAFT CONTROL MESSAGES ARE
FOR MANUAL OR AUTOPILOT CONTROL.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME

EXPLANATION

APPLICABILITY

001 AUTOPILOT CONTROL BIT
[1 BIT] (AP CNT)

J12.2I

DATA ITEM

BIT CODE

EXPLANATION

----- FOR DUI 001 -----

MANUAL

0

MESSAGES RECEIVED ARE FOR MANUAL
CONTROL.

AUTOPILOT

1

MESSAGES BEING RECEIVED ARE FOR
CONTROL OF THE AIRCRAFT THROUGH
THE AUTOPILOT COUPLER.

DFI NAME DEFINITION
706 AUTOPILOT STATUS INDICATES WHETHER OR NOT THE AUTOPILOT ON AN AIRCRAFT IS ENGAGED.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 AUTOPILOT STATUS [1 BIT] (AP STS)		J13.2C1

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
MANUAL	0	AIRCRAFT IS UNDER MANUAL CONTROL BY THE PILOT.
AUTOPILOT	1	AUTOPILOT IS ENGAGED AND AIRCRAFT IS UNDER DATA LINK REMOTE CONTROL.

APPENDIX B

DFI	NAME	DEFINITION
707	CONTROL COMMAND	PROVIDES THE INFORMATION TO DIRECT THE AUTOPILOT CONTROL OF THE AIRCRAFT DURING AUTOMATIC LANDING OR FINAL PHASE OF A SURFACE TARGET VECTORING MISSION.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 VERTICAL CONTROL COMMAND [9 BIT]	THE COMMAND USED FOR DIRECT AUTO-PILOT CONTROL OF THE PITCH ATTITUDE OF THE CONTROLLED AIRCRAFT DURING AUTOMATIC LANDING CONTROL. POSITIVE VALUES ARE 'FLY-UP' COMMANDS AND NEGATIVE VALUES ARE 'FLY-DOWN' COMMANDS. THE REFERENCE PLANE IS THE PLANE DETERMINED BY THE LONGITUDINAL AND LATERAL AXES OF THE AIRCRAFT AT THE TIME OF INITIAL AUTOPILOT (COUPLER) ENGAGEMENT (INDICATED BY MESSAGE OR BY VOICE) IN THE AUTOMATIC MODE (MODE 1/1A).	J12.2I
002 LATERAL CONTROL COMMAND [9 BIT]	THE COMMAND USED FOR DIRECT AUTO-PILOT CONTROL OF THE BANK ATTITUDE OF THE CONTROLLED AIRCRAFT DURING AUTOMATIC LANDING CONTROL. POSITIVE VALUES ARE 'FLY-RIGHT' (RIGHT WING DOWN) AND NEGATIVE VALUES ARE 'FLY-LEFT' (LEFT WING DOWN), AS VIEWED BY THE PILOT. THE REFERENCE PLANE IS THE PLANE DETERMINED BY THE LONGITUDINAL AND LATERAL AXES OF THE AIRCRAFT AT THE TIME OF INITIAL AUTOPILOT (COUPLER) ENGAGEMENT (INDICATED BY MESSAGE OR BY VOICE) IN THE AUTOMATIC MODE (MODE 1/1A).	J12.2I

DFI NAME
707 CONTROL COMMAND

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
-13.5 THROUGH +13 229/512 DEGREES	0 THROUGH 511	IN 27/512 DEGREE INCREMENTS USING MODIFIED TWOS COMPLEMENT CODING.
----- FOR DUI 002 -----		
-30 THROUGH +29 452/512 DEGREES	0 THROUGH 511	IN 60/512 DEGREE INCREMENTS USING MODIFIED TWOS COMPLEMENT CODING.

APPENDIX B

DFI	NAME	DEFINITION
708	FLIGHT PATH ERROR	THE DISPLACEMENT (LATERAL OR VERTICAL) OF AN AIRCRAFT FROM A PRE-ESTABLISHED SEGMENT OF A FLIGHT PATH

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
003 VERTICAL ERROR [6 BIT]	INDICATES THE AIRCRAFT VERTICAL DISPLACEMENT RELATIVE TO THE COMMANDED ALTITUDE. POSITIVE VALUES INDICATE THAT THE AIRCRAFT IS BELOW THE COMMANDED ALTITUDE, AND NEGATIVE VALUES INDICATE THAT THE AIRCRAFT IS ABOVE THE COMMANDED ALTITUDE.	J12.2I
004 LATERAL ERROR [7 BIT]	AIRCRAFT LATERAL DISPLACEMENT RELATIVE TO THE REQUIRED COURSE LINE. POSITIVE VALUES INDICATE THAT THE AIRCRAFT IS ON THE LEFT OF THE REQUIRED COURSE LINE AS VIEWED BY THE PILOT. NEGATIVE VALUES INDICATE THAT THE AIRCRAFT IS ON THE RIGHT OF THE REQUIRED COURSE LINE.	J12.2I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 003 -----		
-640 THROUGH +620 FEET	0 THROUGH 63	IN 20 FEET INCREMENTS WITH MODIFIED TWOS COMPLEMENT CODING.
----- FOR DUI 004 -----		
-1000 THROUGH +984.375 FEET	0 THROUGH 127	IN 15.625 FEET INCREMENTS WITH MODIFIED TWOS COMPLEMENT CODING.

DFI	NAME	DEFINITION
710	RESPONSE INDICATOR	INDICATES WHETHER OR NOT A MESSAGE IS IN RESPONSE TO ANOTHER MESSAGE.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 TRACK NUMBER, REPORT/REQUEST [1 BIT] (TN R/R)	THIS FIELD INDICATES WHETHER OR NOT THE APPLICABLE TRACK NUMBER FIELDS ARE BEING REPORTED OR REQUESTED.	J7.4I
002 RESPONSE INDICATOR, EWAC [1 BIT] (REP IND)		J14.0I
003 RESPONSE INDICATOR [1 BIT] (RSP IND)	THIS FIELD INDICATES WHETHER OR NOT THE MESSAGE IS IN RESPONSE TO A DATA UPDATE REQUEST.	J3.0I J3.7I J6.0I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
REPORT	0	THIS MESSAGE IS REPORTING THE APPLICABLE TRACK NUMBERS.
REQUEST	1	THIS MESSAGE IS REQUESTING THE APPLICABLE TRACK NUMBERS.
----- FOR DUI 002 -----		
NO STATEMENT	0	
RESPONSE TO REQUEST	1	
----- FOR DUI 003 -----		
NOT RESPONDING	0	MESSAGE IS NOT IN RESPONSE TO DATA UPDATE REQUEST.
RESPONDING	1	MESSAGE IS IN RESPONSE TO DATA UPDATE REQUEST.

DFI	NAME	DEFINITION
725	MISSION CORRELATOR	AN IDENTIFYING NUMBER ASSIGNED TO AN OVERALL MISSION WHICH ENABLES PARTICIPANTS WITH DIFFERENT OBJECTIVES ON SPECIFIC MISSIONS TO BE ASSOCIATED WITH THE SAME OVERALL MISSION.
DATA STANDARD USAGE: Link 16		STATUS:
DUI NAME	EXPLANATION	APPLICABILITY
003 MISSION CORRELATOR [8 BIT]	SPECIFIES THE IDENTIFYING NUMBER ASSIGNED TO AN OVERALL MISSION. THIS ENABLES PARTICIPANTS WITH DIFFERENT OBJECTIVES ON SPECIFIC MISSIONS TO BE ASSOCIATED WITH THE SAME OVERALL MISSION.	J2.2C5 J2.3I J2.4I J2.5I J2.6I J8.1I J10.3C2 J10.5I
004 MISSION CORRELATOR, NEW [8 BIT]	SPECIFIES THE IDENTIFYING NUMBER ASSIGNED TO REPLACE THE NUMBER PREVIOUSLY ASSIGNED TO AN OVERALL MISSION.	J8.1I
DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 003-004 -----		
NO STATEMENT	0	
NUMERIC	1 THROUGH 255	

APPENDIX B

DFI	NAME	DEFINITION
730	FLIGHT LEADER INDICATOR	INDICATES WHETHER OR NOT THE AIRCRAFT IS A FLIGHT LEADER.
DATA STANDARD USAGE: Link 16		STATUS:
DUI NAME	EXPLANATION	APPLICABILITY
001 FLIGHT LEADER INDICATOR [1 BIT] (FLT LD)	INDICATES WHETHER OR NOT THE AIRCRAFT IS A FLIGHT LEADER.	J2.2I
DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NOT FLIGHT LEADER	0	
FLIGHT LEADER	1	

DFI	NAME	DEFINITION
731	IDENTIFICATION LETTER/NUMBER	A LETTER OR NUMBER USED TO IDENTIFY A SPECIFIC JU.

DATA STANDARD USAGE: Link 16	STATUS:
------------------------------	---------

DUI NAME	EXPLANATION	APPLICABILITY
001 WINGMAN IDENTIFICATION LETTER/ NUMBER [6 BIT]	A LETTER/NUMBER ASSIGNED TO A SPECIFIC NONC2 JU.	J2.2C5

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
WINGMAN ID LETTER	1 THROUGH 26	LETTERS A THROUGH Z.
WINGMAN ID NUMBER	27 THROUGH 35	NUMBERS 1 THROUGH 9.
UNDEFINED	36 THROUGH 63	

DFI NAME DEFINITION
732 AIRBORNE INDICATOR INDICATES WHETHER AN AIRCRAFT IS ON THE GROUND OR AIRBORNE.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
002 AIRBORNE INDICATOR [1 BIT] (ABN IND)	INDICATES WHETHER OR NOT AN AIRCRAFT IS AIRBORNE.	J2.2I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 002 -----		
NOT AIRBORNE	0	
AIRBORNE	1	

DFI	NAME	DEFINITION
746	TRACK NUMBER, ATDL-1	A FIVE CHARACTER REFERENCE NUMBER USED TO ASSOCIATE DIRECTIVES AND TRACK INFORMATION AMONG SYSTEMS EXCHANGING DATA WITH REQUIREMENTS TO IMPLEMENT ATDL-1 TRACK NUMBERS. THE NUMBER IS COMPOSED OF TWO ALPHABETIC CHARACTERS FOLLOWED BY THREE OCTAL DIGITS WHICH IDENTIFY THE ATDL-1 NUMBER WITHIN THE ORIGINATOR'S BLOCK.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
002 ATDL-1 TRACK NUMBER [16 BIT]		J7.4E0

DATA ITEM	BIT CODE	EXPLANATION
-----------	----------	-------------

----- FOR DUI 002 -----

AA000 THROUGH QH777
(ALPHANUMERIC)

000000 THROUGH 177777
(OCTAL)

THIS TN IS CODED INTO FIVE GROUPS TO ALLOW THE ATDL-1 TN TO BE DERIVED. GROUP 1 IS THE MOST SIGNIFICANT 4 BITS, AND GROUPS 2, 3, 4 AND 5 CONTAIN 3 BITS EACH. THE ATDL-1 TN IS DERIVED BY INTERPRETING THE GROUPS AS FOLLOWS:

GROUP 1 (IN DECIMAL NOTATION)	GROUP 2	GROUP 3,4,5
0=A	0=A	0=0
1=B	1=B	1=1
2=C	2=C	2=2
3=D	3=D	3=3
4=E	4=E	4=4
5=F	5=F	5=5
6=G	6=G	6=6
7=H	7=H	7=7
8=I		
9=J		
10=K		
11=L		
12=M		
13=N		
14=P		
15=Q		

APPENDIX B

DFI	NAME	DEFINITION
747	TRACK NUMBER, NATO LINK 1	AN ALPHANUMERICALLY CODED REFERENCE NUMBER USED BY THE NATO AIR DEFENSE GROUND ENVIRONMENT (NADGE) SYSTEM TO IDENTIFY TRACKS. THE NUMBER CONSISTS OF FIVE CHARACTERS, TWO LETTERS FOLLOWED BY THREE DIGITS.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 NATO LINK 1 TRACK NUMBER [15 BIT]	AN ALPHANUMERICALLY CODED REFERENCE NUMBER USED BY THE NATO AIR DEFENSE GROUND ENVIRONMENT (NADGE) SYSTEM TO IDENTIFY TRACKS. THE NUMBER CONSISTS OF FIVE CHARACTERS, TWO LETTERS FOLLOWED BY THREE DIGITS.	J7.4I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
AA000 THROUGH MM777 (ALPHANUMERIC)	00000 THROUGH 77777 (OCTAL)	THE CODE IS INTERPRETED AS LLDDD (L = LETTERS; D = DIGIT). THE LETTERS AND DIGITS ARE CODED AS FOLLOWS:

OCTAL CODE		LETTER	DIGIT
0	=	A	0
1	=	E	1
2	=	G	2
3	=	H	3
4	=	J	4
5	=	K	5
6	=	L	6
7	=	M	7

DFI NAME DEFINITION
748 NATIONALITY/ALLIANCE THE AFFILIATION OF A TRACK WITH A NATION, INTERNATIONAL ALLIANCE, OR INTERNATIONAL ASSOCIATION.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
001 NATIONALITY/ALLIANCE OF TRACK [7 BIT]	THE COUNTRY OF ORIGIN OR POLITICAL ENTITY OF A REPORTED OBJECT OR TRACK.	J6.0I	J14.0C5	J14.2C5
DATA ITEM	BIT CODE	EXPLANATION		
----- FOR DUI 001 -----				
NO STATEMENT	0			
NAT/ALL-1 THROUGH NAT/ALL-28	1 THROUGH 28	THE NATION OR POLITICAL ENTITY OF THE TRACK IS TO BE DEFINED BY THE INDIVIDUAL THEATER OF OPERATION.		
DISUSED	29			
USSR (SOVIET UNION)	30			
NATO	31			
BELGIUM	32			
CYPRUS	33			
DENMARK	34			
FRANCE	35			
GERMANY	36			
FINLAND	37			
GREECE	38			
ICELAND	39			
IRELAND	40			
ITALY	41			
NETHERLANDS	42			
NORWAY	43			
PORTUGAL	44			
SPAIN	45			
SWEDEN	46			
SWITZERLAND	47			
TURKEY	48			
UNITED KINGDOM	49			
ALBANIA	50			
AUSTRIA	51			
BULGARIA	52			
CZECHOSLOVAKIA	53			
DISUSED	54			

DFI NAME
748 NATIONALITY/ALLIANCE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
HUNGARY	55	
POLAND	56	
RUMANIA	57	
YUGOSLAVIA	58	
CANADA	59	
UNITED STATES OF AMERICA	60	
EGYPT	61	
IRAN	62	
IRAQ	63	
ISRAEL	64	
JORDAN	65	
LEBANON	66	
SAUDI ARABIA	67	
SYRIA	68	
ALGERIA	69	
ETHIOPIA	70	
LIBERIA	71	
LIBYA	72	
SOUTH AFRICA	73	
INDIA	74	
PAKISTAN	75	
CAMBODIA	76	
LAOS	77	
THAILAND	78	
VIETNAM	79	
CHINA, PEOPLE'S REPUBLIC	80	
CHINA, REPUBLIC	81	
KOREA, NORTH	82	
KOREA, REPUBLIC	83	
JAPAN	84	
PHILIPPINES	85	
AUSTRALIA	86	
NEW ZEALAND	87	
ARGENTINA	88	
BRAZIL	89	
CHILE	90	
COLUMBIA	91	
MEXICO	92	
PANAMA	93	
PERU	94	

B-413

DFI NAME
748 NATIONALITY/ALLIANCE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
VENEZUELA	95	
CUBA	96	
DOMINICAN REPUBLIC	97	
UNITED NATIONS FORCE	98	
KUWAIT	99	
YEMEN ARAB REPUBLIC	100	
GUINEA	101	
MALAGASY (MADAGASCAR)	102	
MOROCCO	103	
NIGERIA	104	
SENEGAL	105	
ZIMBABWE	106	
SPANISH NORTH AFRICA	107	
SUDAN	108	
TANZANIA	109	
TUNISIA	110	
UGANDA	111	
BURMA	112	
INDONESIA	113	
MALAYSIA	114	
SINGAPORE	115	
BOLIVIA	116	
ECUADOR	117	
GUATEMALA	118	
NICARAGUA	119	
PARAGUAY	120	
URUGUAY	121	
JAMAICA	122	
INTERNATIONAL RED CROSS	123	
LUXEMBOURG	124	
YEMEN PEOPLE'S DEMOCRATIC REPUBLIC	125	
UNDEFINED	126	
RESET TO NO STATEMENT	127	

B - 414

APPENDIX B

DFI NAME DEFINITION
749 SPACE SPECIFIC TYPE THE SPECIFIC TYPE OF POINT OR TRACK.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
001 SPACE AMBIGUOUS TYPE 1 [12 BIT]	IDENTIFIES THE TARGET SPECIFIC TYPE AS DETERMINED BY AN ONBOARD CORRELATION PROCESS IF THERE ARE NO AMBIGUITIES. IDENTIFIES THE MOST PROBABLE TARGET SPECIFIC TYPE IF AN ONBOARD CORRELATION PROCESS DETERMINES THAT THE SPECIFIC TYPE IS AMBIGUOUS. INFORMATION IN THIS FIELD SHALL BE DERIVED ONLY FROM ONBOARD SOURCES AS OPPOSED TO DATA LINK SOURCES.	J12.6C4	J12.7C2	
002 SPACE SPECIFIC TYPE [12 BIT]	THE SPECIFIC TYPE OF A POINT OR TRACK WITH AN ENVIRONMENT/CATEGORY OF SPACE.	J3.6I J7.0C1 J14.0C5	J3.7C5 J12.0C2 J14.2C5	J6.0E0 J12.6E0 J15.0C1
003 SPACE AMBIGUOUS TYPE 2 [12 BIT]	IDENTIFIES THE SECOND MOST PROBABLE TARGET SPECIFIED TYPE IF AN ONBOARD CORRELATION PROCESS DETERMINES THAT THE SPECIFIC TYPE IS AMBIGUOUS. INFORMATION IN THIS FIELD SHALL BE DERIVED ONLY FROM ONBOARD SOURCES AS OPPOSED TO DATA LINK SOURCES.	J12.6C4	J12.7C2	

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001-003 -----		
NO STATEMENT	0	
FROG-7	1	
HONEST JOHN	2	
SAKR 80	3	
SS-21 MOD 2	4	
SS-21 MOD 3	5	
HAFT-I	6	
UNDEFINED	7 THROUGH 78	
SHORT RANGE (0-65 DM)	79	

DFI NAME
749 SPACE SPECIFIC TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
ALACRAN	80	
CHENG FENG	81	
CONDOR	82	
HAFT II	83	
IRAN-130	84	
LANCE	85	
MB/EE-150	86	
MB/EE-300	87	
UNDEFINED	88	
PRITHVI	89	
SS-1B (SCUD-A)	90	
SS-1C (SCUD-B)	91	
SS-21 (SCARAB)	92	
SS-300	93	
B-610/CJS-98 (BG510)	94	
NHK-I	95	
NHK-II (HYON MU)	96	
UNDEFINED	97 THROUGH 168	
SHORT-MEDIUM RANGE (66-200 DM)	169	
AL-HUSAYN	170	
UNDEFINED	171	
HAFT III	172	
M-9	173	
M-11	174	
MB/EE-600	175	
SCUD-C	176	
SS-23 (SPIDER)	177	
AL HUSSEIN	178	
UNDEFINED	179 THROUGH 242	
MEDIUM RANGE (201-400 DM)	243	
AL-ABBAS	244	
JERICO-I	245	
AL HIJARAN	246	
SONDA IV	247	
UNDEFINED	248 THROUGH 330	
MEDIUM-EXTENDED RANGE (401-600 DM)	331	
AL-FATAH	332	
BADR-2000	333	

DFI NAME
749 SPACE SPECIFIC TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
CONDOR II	334	
CSS-1	335	
MB/EE-1000	336	
SKY HORSE	337	
SS-12A (SCALEBOARD A)	338	
SS-12B (SCALEBOARD B)	339	
SS1000	340	
TIEN MA	341	
UNDEFINED	342	THROUGH 416
EXTENDED RANGE (601-800 DM)	417	
ARNISTON	418	
CAPRICORNIO	419	
JERICO II	420	
NODONG-1	421	
SS-N-5 (SERB)	422	
UNDEFINED	423	THROUGH 496
EXTENDED-LONG RANGE (801-1000 DM)	497	
AGNI	498	
AL/ABED	499	
CC-4 (SANDAL)	500	
CSS-5	501	
UNDEFINED	502	THROUGH 575
LONG RANGE (1001-1350 DM)	576	
CHEVALINE	577	
CSS-2	578	
CSS-3	579	
CSS-4	580	
CSS-N-3	581	
M-4 SLBM	582	
M-5 SLBM	583	
M-20 SLBM	584	
MIDGETMAN	585	
MINUTEMAN I	586	
MINUTEMAN II	587	
PEACEKEEPER	588	
POLARIS A-3	589	
POSEIDON C-3	590	
SS-11 (SEGO)	591	

B-417

MIL-STD-6016B
APPENDIX B

DFI NAME
749 SPACE SPECIFIC TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
SS-13 (SAVAGE)	592	
SS-17 (SPANKER) MOD 1	593	
SS-17 (SPANKER) MOD 2	594	
SS-17 (SPANKER) MOD 3	595	
SS-18 (SATAN) MOD 1	596	
SS-18 (SATAN) MOD 2	597	
SS-18 (SATAN) MOD 3	598	
SS-20 (SABER)	599	
SS-24 (SCALPEL)	600	
SS-25 (SICKLE)	601	
SS-N-6 (SAWFLY)	602	
SS-N-8	603	
SS-N-17 (SNIPE)	604	
SS-N-18 (STINGRAY)	605	
SS-N-20 (STURGEON)	606	
SS-N-23 (SKIFF)	607	
SSBS S-3	608	
SSBS S-4	609	
TRIDENT I (C-4)	610	
TRIDENT II (D-5)	611	
MODIFIED CSS-5	612	
SS-19 MOD 3	613	
UNDEFINED	614	
NEW SOLID SLBM	615	
CSS-NX-3	616	
M4B	617	
M45	618	
UNDEFINED	619	THROUGH 786
>1350 DM	787	
ABM-1B (GALOSH)	788	
ARROW	789	
ASTER	790	
CORPS SAM	791	
ERINT	792	
HAWK	793	
PATRIOT	794	
SA-10 (GRUMBLE)	795	
SA-12A (GLADIATOR)	796	
SA-12B (GIANT)	797	
SA-N-6 (GRUMBLE)	798	
SH-08 (GAZELLE)	799	

DFI NAME
749 SPACE SPECIFIC TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
STANDARD MISSILE BLOCK	800	
IVA		
THAAD	801	
SM-2 BLOCK IV	802	
SM-3 LEAP	803	
UNDEFINED	804 THROUGH 876	
INTERCEPTOR	877	
OPERATIONAL COMMANDER	878 THROUGH 941	
DEFINED 1-64		
UNDEFINED	942 THROUGH 1022	
BALLISTIC MISSILE	1023	
GENERAL		
UNDEFINED	1024 THROUGH 2046	
SPACE GENERAL	2047	
UNDEFINED	2048 THROUGH 4093	
RESET TO NO STATEMENT	4094	
UNDEFINED	4095	

DFI NAME DEFINITION
752 ACTIVITY AMPLIFICATION INDEX AN INDEX USED WITH THE CATEGORY INDEX (DFI #275) TO DEFINE THE
CURRENT ACTIVITY OF AN OBJECT OR TRACK.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 ACTIVITY AMPLIFICATION INDEX [6 BIT]	AN INDEX USED WITH THE ENVIRONMENT/ CATEGORY FIELD TO FURTHER DEFINE THE ACTIVITY OF A REPORTED POINT OR TRACK.	J6.0I

DATA ITEM	BIT CODE	EXPLANATION
-----------	----------	-------------

----- FOR DUI 001 -----

FOR ENV/CAT = 0, NO
STATEMENT/UNKNOWN

NO STATEMENT	0
ILLEGAL	1 THROUGH 63

FOR ENV/CAT = 1, SPACE

NO STATEMENT	0
UNDEFINED	1 THROUGH 50
ACTIVITY AMPLIFICATION	51 THROUGH 62
INDEX DEFINED BY THE	
JOINT OPERATIONAL	
COMMANDER	
RESET TO NO STATEMENT	63

FOR ENV/CAT = 2, AIR

NO STATEMENT	0
INVESTIGATING	1
ASSIGNED TO DESTROY	2
WEAPONS ARMED	3
VISUAL CONTACT	4

DFI NAME
752 ACTIVITY AMPLIFICATION INDEX

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
-----	(CONTINUED)	
FOR ENV/CAT = 2, AIR		

RADAR/INFRARED LOCK-ON	5	
WEAPONS RELEASE IMMINENT	6	
WEAPONS RELEASED	7	
SUCCESSFUL	8	
UNSUCCESSFUL	9	
ENGAGEMENT BROKEN	10	
SCRAMBLE	11	
ENROUTE	12	
ON STATION	13	
RENDEZVOUS	14	
MARSHALLING	15	
RETURN TO BASE	16	
REFUELING	17	
JAMMING, GENERAL	18	
JAMMING, RADAR	19	
JAMMING, FIRE CONTROL	20	
SYSTEM/AIRBORNE		
INTERCEPT		
JAMMING, IFF/SIF	21	
JAMMING, COMMUNICATION	22	
DROPPING CHAFF	23	
DISPERSAL	24	
FLUSH	25	
ANTISUBMARINE WARFARE	26	
SEARCH ATTACK		
ELECTRONIC PROTECTION	27	
SHADOW	28	
INTERVENE	29	
UNDEFINED	30 THROUGH 50	
ACTIVITY AMPLIFICATION	51 THROUGH 62	
INDEX DEFINED BY THE		
JOINT OPERATIONAL		
COMMANDER		
RESET TO NO STATEMENT	63	

B - 421

MIL-STD-6016B
APPENDIX B

DFI NAME
752 ACTIVITY AMPLIFICATION INDEX

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
----- FOR ENV/CAT = 3, SURFACE (MARITIME) -----		
NO STATEMENT	0	
ATTACKING	1	
MISSILE	2	
GUN FIRING	3	
MINE LAYING	4	
FIRE CONTROL TRACKING	5	
WEAPON ASSIGNED	6	
AIR OPERATIONS (LAUNCH, RECOVERY)	7	
ELECTRONIC ATTACK	8	
JAMMING		
EVASION/EVASIVE TACTICS	9	
ENGAGEMENT BROKEN	10	
ACOUSTIC JAMMING	11	
ARRIVING/RENDEZVOUSING	12	
COMMAND VESSEL	13	
CONVOYING	14	
DEAD IN THE WATER	15	
DECOY	16	
DEPARTING	17	
ELECTRONIC PROTECTION	18	
ENROUTE/TRANSITING	19	
ELECTRONIC WARFARE	20	
SUPPORT/SIGNAL		
INTELLIGENCE		
AIR CONTROL UNIT	21	
ATTACK AIR CONTROL UNIT	22	
ANTISUBMARINE WARFARE	23	
AIR CONTROL UNIT		
REST AND RECREATION	24	
FISHING	25	
HARASSING	26	
OCEANOGRAPHIC	27	
ICE BREAKING	28	
INTELLIGENCE COLLECTION	29	
INTRUDER	30	

B - 422

DFI NAME
752 ACTIVITY AMPLIFICATION INDEX

DATA ITEM (CONTINUED)	BIT CODE (CONTINUED)	EXPLANATION
----- FOR ENV/CAT = 3, SURFACE (MARITIME) -----		
MINE HUNTING	31	
MINE SWEEPING/CLEARING	32	
NAVAL GUNFIRE SUPPORT	33	
OBSERVING/MONITORING, AS A NEUTRAL OBSERVER	34	
ON STATION	35	
PATROL, SEARCH/TRACKING/ RECONNAISSANCE/ SCOUTING	36	
PIRAZ UNIT	37	
REPAIRING DAMAGE	38	
RELIEVING	39	
REPLENISHING	40	
SEARCH ATTACK UNIT	41	
SCREEN	42	
SINKING	43	
TATTLETALE/SHADOW	44	
TROOP OPERATIONS	45	
TOWING	46	
UNDER TOW	47	
UNDEFINED	48 THROUGH 50	
ACTIVITY AMPLIFICATION INDEX DEFINED BY THE JOINT OPERATIONAL COMMANDER	51 THROUGH 62	
RESET TO NO STATEMENT	63	
----- FOR ENV/CAT = 4, SUBSURFACE (MARITIME) -----		
NO STATEMENT	0	
TARGETING	1	
MISSILE OPERATIONS, UNSPECIFIED	2	

DFI NAME
752 ACTIVITY AMPLIFICATION INDEX

DATA ITEM (CONTINUED) ----- FOR ENV/CAT = 4, SUBSURFACE (MARITIME) -----	BIT CODE (CONTINUED)	EXPLANATION
MISSILE OPERATIONS, SIMULATED FIRING	3	
MISSILE OPERATIONS, LIVE FIRING/ATTACK	4	
TORPEDO OPERATIONS, UNSPECIFIED	5	
TORPEDO OPERATIONS, SIMULATED/EXERCISE	6	
TORPEDO OPERATIONS, ATTACK/LIVE	7	
MINE LAYING	8	
EVASION/EVASIVE TACTICS	9	
REPAIRING DAMAGE	10	
ARRIVING/RENDEZVOUSING	11	
COMMAND VESSEL	12	
CONVOYING/ESCORTING	13	
DEAD IN THE WATER, SURFACED	14	
DEAD IN THE WATER, SUBMERGED	15	
DEPARTING	16	
ENROUTE/TRANSITING	17	
ELECTRONIC WARFARE SUPPORT	18	
AIR CONTROL UNIT	19	
OBSERVING/MONITORING, AS A NEUTRAL OBSERVER	20	
ON STATION	21	
PATROL, SEARCH/ RECONNAISSANCE/ SCOUTING	22	
RELIEVING	23	
REPLENISHING	24	
SCREEN	25	
SINKING	26	
TATTLETALE/SHADOW	27	

B - 424

MIL-STD-6016B
APPENDIX B

DFI NAME
752 ACTIVITY AMPLIFICATION INDEX

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
-----	(CONTINUED)	
FOR ENV/CAT = 4, SUBSURFACE (MARITIME)		

TROOP OPERATIONS	28	
TOWING	29	
UNDER TOW	30	
UNDEFINED	31 THROUGH 50	
ACTIVITY AMPLIFICATION INDEX DEFINED BY THE JOINT OPERATIONAL COMMANDER	51 THROUGH 62	
RESET TO NO STATEMENT	63	

FOR ENV/CAT = 5, LAND (GROUND)		

NO STATEMENT	0	
INVESTIGATING	1	
ASSIGNED TO DESTROY	2	
WEAPONS ARMED	3	
VISUAL CONTACT	4	
RADAR LOCK-ON	5	
WEAPONS RELEASE IMMINENT	6	
WEAPONS RELEASED	7	
SUCCESSFUL	8	
UNSUCCESSFUL	9	
ENGAGEMENT BROKEN	10	
UNDEFINED	11	
ENROUTE	12	
UNDEFINED	13 THROUGH 17	
JAMMING, GENERAL	18	
JAMMING, RADAR	19	
JAMMING, FIRE CONTROL SYSTEM/AIRBORNE INTERCEPT	20	
JAMMING, IFF/SIF	21	
JAMMING, COMMUNICATION	22	

B - 425

MIL-STD-6016B
APPENDIX B

DFI NAME
752 ACTIVITY AMPLIFICATION INDEX

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
----- FOR ENV/CAT = 5, LAND (GROUND) -----	(CONTINUED)	
UNDEFINED	23 THROUGH 50	
ACTIVITY AMPLIFICATION	51 THROUGH 62	
INDEX DEFINED BY THE		
JOINT OPERATIONAL		
COMMANDER		
RESET TO NO STATEMENT	63	
----- FOR ENV/CAT = 6 THROUGH 7, UNDEFINED -----		
UNDEFINED	0 THROUGH 63	

DFI NAME DEFINITION
753 OPERATIONAL STATUS REPORTED WEAPON OR FACILITY OPERATIONAL STATUS.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 OPERATIONAL STATUS [4 BIT]	THE OPERATIONAL STATUS OF A REPORTED WEAPON OR FACILITY.	J6.0I
002 OPERATIONAL CAPABILITY [2 BIT] (OP CAP)	DESCRIBES THE OPERATIONAL CAPABILITY OF THE REPORTED PLATFORM OR SYSTEM.	J13.5I
003 OPERATIONAL CAPABILITY, AIRCRAFT [2 BIT] (AR CAP)	DESCRIBES THE OPERATIONAL CAPABILITY OF THE REPORTED AIRCRAFT.	J13.2I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
ABLE TO PERFORM MISSION	1	
WEAPON SYSTEM ON ALERT	2	
FIGHTERS HAVE SCRAMBLED	3	
UNABLE TO PERFORM	4	
UNABLE-WEATHER	5	
UNABLE-BATTLE DAMAGE	6	
UNABLE-FUEL DEPLETION	7	
UNABLE-ORDNANCE DEPLETED	8	
LOW FUEL STATE	9	
UNDEFINED	10 THROUGH 14	
RESET TO NO STATEMENT	15	CLEARs VALUE TO ZERO.
----- FOR DUI 002 -----		
NO STATEMENT	0	
FULLY OPERATIONAL	1	
PARTIALLY OPERATIONAL	2	
NONOPERATIONAL	3	

DFI NAME
753 OPERATIONAL STATUS

DATA ITEM (CONTINUED) ----- FOR DUI 003 -----	BIT CODE	EXPLANATION
NO STATEMENT	0	
ABLE TO PERFORM MISSION	1	
LOW FUEL STATE	2	
UNABLE TO PERFORM MISSION	3	

DFI	NAME	DEFINITION
754	LOCALLY DEFINED AMPLIFYING DATA	LOCALLY DEFINED AMPLIFYING DATA CONCERNING A REPORTED OBJECT OR TRACK, WITH DISCRETE MEANINGS ESTABLISHED BY THE OPERATIONAL COMMANDER.
DATA STANDARD USAGE: Link 16		STATUS:
DUI NAME	EXPLANATION	APPLICABILITY
001 LOCAL DISCRETE IDENTIFIER [12 BIT]	LOCALLY DEFINED AMPLIFYING DATA CONCERNING A REPORTED OBJECT OR TRACK WITH DISCRETE MEANINGS ESTABLISHED BY THE OPERATIONAL COMMANDER.	J6.0E0 J14.0C5 J14.2C5
DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
NUMERIC	1 THROUGH 4094	LOCALLY DEFINED MEANINGS.
RESET TO NO STATEMENT	4095	

APPENDIX B

DFI	NAME	DEFINITION
755	EPOCH SUBDIVISION	EPOCHS ARE DIVIDED INTO 64 EQUAL SUBDIVISIONS, NUMBERED 0 TO 63. THE ASSIGNMENT IS THE FIRST TIME SLOT OF THE SUBDIVISION INDICATED, N, (I.E. TIMESLOT A*N(512), N=0 TO 63). WHEN BOTH THE DELTA EPOCH AND EPOCH SUBDIVISION EQUAL ZERO, THE ASSIGNMENT SHALL BE EXECUTED IMMEDIATELY.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 EPOCH SUBDIVISION [6 BIT]	EPOCHS ARE DIVIDED INTO 64 EQUAL SUBDIVISIONS, NUMBERED 0 TO 63. THE ASSIGNMENT IS THE FIRST TIME SLOT OF THE SUBDIVISION INDICATED, N, (I.E. TIMESLOT A*N(512), N = 0 TO 63, A = TIME SLOT SET.) WHEN THE DELTA EPOCH IS EQUAL TO ZERO AND THE EPOCH SUBDIVISION IS EQUAL TO ZERO, THE ASSIGNMENT SHALL BE EXECUTED IMMEDIATELY.	J0.3I J0.4I
002 EPOCH SUBDIVISION, EXECUTION [6 BIT]	EPOCHS ARE DIVIDED INTO 64 EQUAL SUBDIVISIONS, NUMBERED 0 TO 63. THE ASSIGNMENT IS THE FIRST TIME SLOT OF THE SUBDIVISION INDICATED N, (I.E. TIME SLOT A*N(512), N = 0 TO 63, A = TIME SLOT SET). WHEN THE DELTA EPOCH IS EQUAL TO ZERO, THE ASSIGNMENT SHALL BE EXECUTED IMMEDIATELY.	J0.2I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001 AND 002 -----		
TIME SLOT (A*N(512))	0 THROUGH 63	WHERE "A" IS THE TIME SLOT SET AND 'N' VARIES FROM 0-63.

APPENDIX B

DFI NAME
756 SPARE BIT

DEFINITION
SPARE BITS ARE USED IN BIT ORIENTED MESSAGES THAT DO NOT NEED ALL THE INFORMATION BITS TO TRANSFER DATA. ALTHOUGH A SPARE BIT DOES NOT CONVEY ANY DATA, IT IS USED AS A DATA FIELD IDENTIFIER TO MAINTAIN CORRECT BIT POSITIONS AND TOTALS IN FIXED FORMAT BIT ORIENTED MESSAGES.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME

EXPLANATION

APPLICABILITY

001 SPARE
[1 BIT] (SP)

J0.6C1	J0.6C3	J0.7I
J0.7E0	J1.1I	J1.1C2
J1.4I	J1.5E0	J2.0I
J2.0E0	J2.0C1	J2.2E0
J2.2C1	J2.2C2	J2.2C3
J2.2C5	J2.3I	J2.3E0
J2.3C1	J2.3C2	J2.3C3
J2.4E0	J2.4C1	J2.4C2
J2.4C3	J2.5I	J2.5C1
J2.5C3	J2.5C6	J2.6I
J2.6E0	J2.6C1	J2.6C3
J2.6C6	J3.0I	J3.0E0
J3.0C2	J3.1C1	J3.2E0
J3.2C1	J3.3E0	J3.3C1
J3.5E0	J3.5C1	J3.5C2
J3.6I	J3.6C3	J3.7I
J5.4I	J5.4C1	J6.0I
J6.0E0	J7.0I	J7.1I
J7.2I	J7.4I	J7.6I
J7.6E0	J7.6C1	J7.7I
J8.0E0	J9.0I	J10.2I
J10.3I	J12.4I	J12.7C1
J13.2C2	J13.2C3	J13.2C4
J13.3C1	J13.3C2	J13.3C3
J13.3C5	J13.3C6	J13.3C7
J13.5C1	J13.5C2	J14.0C1
J14.2C6		

002 SPARE
[2 BIT] (SP)

J0.0E0	J0.4I	J0.4E0
J0.6I	J0.7E0	J1.4E0
J1.5C1	J2.2C5	J2.3I
J2.4I	J2.5I	J2.5C6
J2.6I	J2.6C6	J3.0E0
J3.0C1	J3.0C5	J3.1E0
J3.2E0	J3.3E0	J3.4E0

DFI NAME
756 SPARE BIT

DUI NAME
002 (CONTINUED)

EXPLANATION

APPLICABILITY

J3.5C1	J3.5C2	J3.7C4
J6.0I	J7.1I	J7.6C2
J7.7I	J9.0E0	J9.1I
J12.0C4	J12.5E0	J12.5E1
J12.7E0	J13.0C1	J13.2I
J13.3I	J13.3C1	J13.3C2
J14.0C3	J14.2E0	J14.2C6
J15.0I	J15.0E0	J28.20E0

003 SPARE
[3 BIT]

J0.0I	J0.2I	J0.3I
J0.4I	J0.6I	J0.6C3
J0.6C4	J0.7E0	J1.6E0
J2.0E0	J2.4C4	J2.5C4
J3.0E0	J3.0C1	J3.1I
J3.3I	J3.4E0	J3.4C1
J3.7C3	J7.0I	J7.1C1
J7.3C1	J7.3C2	J7.3C3
J7.6E0	J7.6C2	J12.1I
J12.6C4	J13.0I	J14.0C1
J14.0C6	J14.2C7	J28.20I
J31.0I	J31.0C1	

004 SPARE
[4 BIT]

J0.0I	J0.2I	J1.1C1
J3.1E0	J7.0I	J7.1I
J10.5I	J12.4E0	J12.6C3
J12.6C7	J13.3I	J13.4I
J13.4C1	J14.2C6	J15.0I
J15.0C1	J31.0E0	

005 SPARE
[5 BIT]

J0.4I	J0.6I	J1.6I
J2.2I	J2.3I	J2.4I
J2.5I	J2.6I	J3.0C5
J3.1I	J3.2C1	J3.3C1
J3.4I	J7.4I	J7.5I
J12.3E0	J12.6C1	J12.6C2
J12.6C6	J13.5I	J31.0C2

006 SPARE
[6 BIT]

J0.4I	J3.7C4	J6.0I
J7.0I	J8.1I	J10.3E0
J12.0C5	J12.6C1	J13.2C7

APPENDIX B

MIL-STD-6016B

DFI NAME
756 SPARE BIT

DUI NAME
006 (CONTINUED)

EXPLANATION

APPLICABILITY

J13.3C5 J13.3C6 J13.3C7
J14.0C5 J14.2C5 J15.0C1
J28.20I

007 SPARE
[7 BIT]

J0.7I J1.5E0 J2.4I
J5.4C2 J6.0I J7.0I
J10.3C2 J12.5I J13.4C2
J14.0C5 J14.2C5

008 SPARE
[8 BIT]

J0.7I J1.0E0 J1.2I
J1.2E0 J2.0I J2.2C5
J3.6C4 J12.0C1 J31.0C1

009 SPARE
[9 BIT]

J0.3I J1.5I J3.2C4
J7.1I J10.2I J10.3I

010 SPARE
[10 BIT]

J0.0C1 J0.5I J3.5C3

011 SPARE
[11 BIT]

J7.0I RTT-B

012 SPARE
[12 BIT]

J3.6E1 J6.0E0 J7.0C1
J7.5I J10.3C1 J12.0C2
J12.6E0 J12.6C4 J12.7E1
J12.7C2 J14.0C5 J14.2C5
J15.0C1

013 SPARE
[13 BIT]

J5.4C2 J7.2I J7.7I
J14.0I J14.2C1

014 SPARE
[14 BIT]

J9.0C1 J13.2C6 J14.0C3
J14.2C4

015 SPARE
[15 BIT]

J0.6C2 J10.6I J31.0I

016 SPARE
[16 BIT]

J2.4C4 J2.5C4 J12.3I
J14.0C5 J14.2C5 J17.0I

DFI NAME
756 SPARE BIT

DUI NAME
017 SPARE
[17 BIT]

018 SPARE
[18 BIT]

019 SPARE
[19 BIT]

020 SPARE
[20 BIT]

021 SPARE
[21 BIT]

022 SPARE
[22 BIT]

023 SPARE
[23 BIT]

024 SPARE
[24 BIT]

025 SPARE
[25 BIT]

026 SPARE
[26 BIT]

027 SPARE
[27 BIT]

028 SPARE
[28 BIT]

029 SPARE
[29 BIT]

030 SPARE
[30 BIT]

EXPLANATION

APPLICABILITY
J10.2C1 J13.2C3

J1.6I J7.1I

J2.2C1 J2.3C1 J2.4C1

J2.0I J2.5E0

J6.0C1 J12.0C6 J13.4I

J1.2E1 J14.2C3

J7.6C3

J10.2C2

J12.0C7

J12.6C5

J0.0C1

DFI NAME
756 SPARE BIT

DUI	NAME	EXPLANATION	APPLICABILITY		
031	SPARE [31 BIT]		J0.5I	J3.1C1	J8.0I
032	SPARE [32 BIT]		J13.0C2		
033	SPARE [33 BIT]		J0.4C2	J2.0C1	
034	SPARE [34 BIT]				
035	SPARE [35 BIT]		J13.2C5		
036	SPARE [36 BIT]		J3.3C2	J17.0E0	
037	SPARE [37 BIT]		J7.4E0		
038	SPARE [38 BIT]				
039	SPARE [39 BIT]		J14.2C8		
040	SPARE [40 BIT]		J3.0C4		
041	SPARE [41 BIT]				
042	SPARE [42 BIT]				
043	SPARE [43 BIT]		J0.3C2	J3.4C2	J9.0C2
044	SPARE [44 BIT]				

DFI NAME
756 SPARE BIT

DUI NAME
045 SPARE
[45 BIT]

046 SPARE
[46 BIT]

047 SPARE
[47 BIT]

048 SPARE
[48 BIT]

049 SPARE
[49 BIT]

050 SPARE
[50 BIT]

051 SPARE
[51 BIT]

052 SPARE
[52 BIT]

053 SPARE
[53 BIT]

054 SPARE
[54 BIT]

055 SPARE
[55 BIT]

056 SPARE
[56 BIT]

057 SPARE
[57 BIT]

058 SPARE
[58 BIT]

EXPLANATION

APPLICABILITY

J0.3C1 J0.4C1 J13.3C4

J3.7C5 J7.0C1 J12.1E0
J12.7C3

J0.1I J31.7I

DFI NAME
756 SPARE BIT

DUI NAME
059 SPARE
[59 BIT]

060 SPARE
[60 BIT]

061 SPARE
[61 BIT]

062 SPARE
[62 BIT]

063 SPARE
[63 BIT]

064 SPARE
[64 BIT]

065 SPARE
[65 BIT]

066 SPARE
[66 BIT]

067 SPARE
[67 BIT]

068 SPARE
[68 BIT]

069 SPARE
[69 BIT]

EXPLANATION

APPLICABILITY

J7.0E0

DFI	NAME	DEFINITION
757	RANGE	THE DISTANCE BETWEEN TWO OBJECTS, UNITS, OR GEOGRAPHICAL LOCATIONS.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 RANGE, 1 [16 BIT]	THE RANGE OF THE CONTACT FROM THE DETECTING SENSOR.	J12.7C1
013 VISIBILITY [7 BIT]	IN 100 METER INCREMENTS.	J13.0C1 J17.0I
015 TARGET RANGE [15 BIT]	THE DISTANCE BETWEEN THE BEACON AND THE TARGET.	J12.0C5
016 RANGE [11 BIT]	THE RANGE OF THE CONTACT FROM THE DETECTING SENSOR.	J5.4C1

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
0 THROUGH 983,010 FT NO STATEMENT	0 THROUGH 65534 65535	IN 15 FOOT INCREMENTS
----- FOR DUI 013 -----		
0 THROUGH 12,500 METERS OVER 12,500 METERS NO STATEMENT	0 THROUGH 125 126 127	IN 100 METER INCREMENTS.
----- FOR DUI 015 -----		
0 THROUGH 32,766 FEET NO STATEMENT	0 THROUGH 32766 32767	IN ONE FOOT INCREMENTS.
----- FOR DUI 016 -----		
NO STATEMENT/UNKNOWN 250 THROUGH 511,750 YARDS	0 1 THROUGH 2047	IN 250 YARD INCREMENTS.

APPENDIX B

DFI NAME
758 DISUSED

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 DISUSED [1 BIT] (DUD)	NO DATA (INFORMATION) IS CONVEYED BY THIS BIT. PREVIOUSLY, THIS FIELD HAD A VALID MEANING AND CANNOT BE RENAMED WITHOUT CONSIDERING COORDINATED IMPLEMENTATION.	J3.2E0 J3.3E0 J3.5I J3.5E0 J3.7I J7.1I J7.6I
002 DISUSED [2 BIT] (DUD)	NO DATA (INFORMATION) IS CONVEYED BY THESE BITS. PREVIOUSLY, THIS FIELD HAD A VALID MEANING AND CANNOT BE RENAMED WITHOUT CONSIDERING COORDINATED IMPLEMENTATION.	J7.6I J8.1I J9.0E0 J12.0I
003 DISUSED [3 BIT]	NO DATA (INFORMATION) IS CONVEYED BY THESE BITS. PREVIOUSLY, THIS FIELD HAD A VALID MEANING AND CANNOT BE RENAMED WITHOUT CONSIDERING COORDINATED IMPLEMENTATION.	J9.0I J12.0I
004 DISUSED [4 BIT]	NO DATA (INFORMATION) IS CONVEYED BY THESE BITS. PREVIOUSLY, THIS FIELD HAD A VALID MEANING AND CANNOT BE RENAMED WITHOUT CONSIDERING COORDINATED IMPLEMENTATION.	J3.7I J3.7C3
005 DISUSED [5 BIT]	NO DATA (INFORMATION) IS CONVEYED BY THESE BITS. PREVIOUSLY, THIS FIELD HAD A VALID MEANING AND CANNOT BE RENAMED WITHOUT CONSIDERING COORDINATED IMPLEMENTATION.	J9.0E0
006 DISUSED [6 BIT]	NO DATA (INFORMATION) IS CONVEYED BY THESE BITS. PREVIOUSLY, THIS FIELD HAD A VALID MEANING AND CANNOT BE RENAMED WITHOUT	

APPENDIX B

DFI NAME
758 DISUSED

DUI NAME
006 (CONTINUED)

EXPLANATION
CONSIDERING COORDINATED
IMPLEMENTATION.

APPLICABILITY

007 DISUSED
[7 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

J0.0I J3.7C1

008 DISUSED
[8 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

J8.1I J10.3C2

009 DISUSED
[9 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

010 DISUSED
[10 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

011 DISUSED
[11 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

012 DISUSED
[12 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND

APPENDIX B

DFI NAME
758 DISUSED

DUI NAME
012 (CONTINUED)

EXPLANATION
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

APPLICABILITY

013 DISUSED
[13 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

014 DISUSED
[14 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

015 DISUSED
[15 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

016 DISUSED
[16 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

J9.0E0

017 DISUSED
[17 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

018 DISUSED
[18 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS

DFI NAME
758 DISUSED

DUI NAME
018 (CONTINUED)

EXPLANATION
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

APPLICABILITY

019 DISUSED
[19 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

020 DISUSED
[20 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

021 DISUSED
[21 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

022 DISUSED
[22 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

023 DISUSED
[23 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

DFI NAME
758 DISUSED

DUI NAME
024 DISUSED
[24 BIT]

EXPLANATION
NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

APPLICABILITY

025 DISUSED
[25 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

026 DISUSED
[26 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

027 DISUSED
[27 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

028 DISUSED
[28 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

029 DISUSED
[29 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

DFI NAME
758 DISUSED

DUI NAME
030 DISUSED
[30 BIT]

EXPLANATION
NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

APPLICABILITY

031 DISUSED
[31 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

032 DISUSED
[32 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

033 DISUSED
[33 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

034 DISUSED
[34 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

035 DISUSED
[35 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

DFI NAME
758 DISUSED

DUI NAME
036 DISUSED
[36 BIT]

EXPLANATION
NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

APPLICABILITY

037 DISUSED
[37 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

038 DISUSED
[38 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

039 DISUSED
[39 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

040 DISUSED
[40 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

041 DISUSED
[41 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

DFI NAME
758 DISUSED

DUI NAME
042 DISUSED
[42 BIT]

EXPLANATION
NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

APPLICABILITY

043 DISUSED
[43 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

044 DISUSED
[44 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

045 DISUSED
[45 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

046 DISUSED
[46 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

047 DISUSED
[47 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

APPENDIX B

DFI NAME
758 DISUSED

DUI NAME
048 DISUSED
[48 BIT]

EXPLANATION
NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

APPLICABILITY

049 DISUSED
[49 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

050 DISUSED
[50 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

051 DISUSED
[51 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

052 DISUSED
[52 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

053 DISUSED
[53 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

DFI NAME
758 DISUSED

DUI NAME
054 DISUSED
[54 BIT]

EXPLANATION
NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

APPLICABILITY

055 DISUSED
[55 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

056 DISUSED
[56 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

057 DISUSED
[57 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

058 DISUSED
[58 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

059 DISUSED
[59 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

DFI NAME
758 DISUSED

DUI NAME
060 DISUSED
[60 BIT]

EXPLANATION
NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

APPLICABILITY

061 DISUSED
[61 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

062 DISUSED
[62 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

063 DISUSED
[63 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

064 DISUSED
[64 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

065 DISUSED
[65 BIT]

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

DFI NAME
758 DISUSED

DUI NAME
066 DISUSED
[66 BIT]

067 DISUSED
[67 BIT]

068 DISUSED
[68 BIT]

EXPLANATION
NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

NO DATA (INFORMATION) IS CONVEYED
BY THESE BITS. PREVIOUSLY, THIS
FIELD HAD A VALID MEANING AND
CANNOT BE RENAMED WITHOUT
CONSIDERING COORDINATED
IMPLEMENTATION.

APPLICABILITY

DFI	NAME	DEFINITION
768	TRACK NUMBER, LINK 4A	A TRACK NUMBER EXCHANGED BY A TACTICAL DATA SYSTEM AND AN AIRCRAFT VIA LINK 4A TO REFERENCE AIRCRAFT OR GEOGRAPHICAL POSITIONS.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 INDEX NUMBER, THIRD PARTY [6 BIT]	THE INDEX NUMBER OF THE TARGET ASSIGNED BY THE INDEX ORIGINATOR.	J12.0C7 J12.6C2
002 INDEX NUMBER [6 BIT]		J12.0C1 J12.6I J12.7I J14.0I J14.2E0 J17.0I
003 INDEX NUMBER, A [6 BIT]	THE INDEX NUMBER ASSIGNED BY ORIGINATOR (A).	J12.5I
004 INDEX NUMBER, B [6 BIT]	THE INDEX NUMBER ASSIGNED BY ORIGINATOR (B).	J12.5E0
005 INDEX NUMBER, C [6 BIT]	THE INDEX NUMBER ASSIGNED BY ORIGINATOR (C).	J12.5E0
006 INDEX NUMBER, D [6 BIT]	THE INDEX NUMBER ASSIGNED BY ORIGINATOR (D).	J12.5E0
007 INDEX NUMBER, E [6 BIT]	THE INDEX NUMBER ASSIGNED BY ORIGINATOR (E).	J12.5E1
008 INDEX NUMBER, F [6 BIT]	THE INDEX NUMBER ASSIGNED BY ORIGINATOR (F).	J12.5E1
009 INDEX NUMBER, G [6 BIT]	THE INDEX NUMBER ASSIGNED BY ORIGINATOR (G).	J12.5E1
010 INDEX NUMBER, RELATED [6 BIT]	THE INDEX NUMBER OF THE TARGET RELATED TO THE INDEX NUMBER IN THE MESSAGE.	J12.0C6

DFI NAME
768 TRACK NUMBER, LINK 4A

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001-010 -----		
NO STATEMENT	0	
NUMERIC	1 THROUGH 63	A VALUE ASSIGNED BY THE ORIGINATOR TO DIFFERENTIATE AMONG SENSOR TARGET REPORTS.

APPENDIX B

DFI	NAME	DEFINITION
769	TRACK NUMBER, LINK 16	A COMMON SET OF REFERENCE NUMBERS USED TO ASSOCIATE DIRECTIVES AND TACTICAL INFORMATION BY IDENTIFYING SYSTEM ENTITIES SUCH AS COMMUNICATING UNITS, TRACKS, TARGETS, AND SPECIAL POINTS.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
001 TRACK NUMBER, DEMAND ORIGINATOR A [15 BIT]	THE TRACK NUMBER OF THE UNIT ORIGINATING THE DEMAND (A).	J0.7I		
002 TRACK NUMBER, REFERENCE [19 BIT]	A REFERENCE NUMBER USED TO ASSOCIATE INFORMATION AND DIRECTIVES WITH THE TRACK.	J3.0I J3.3I J3.6I J6.0I J7.4I J10.2I J10.6I J13.2I J13.5I	J3.1I J3.4I J3.7I J7.0I J7.5I J10.3I J12.6C1 J13.3I J14.0I	J3.2I J3.5I J5.4I J7.1I J8.0E0 J10.5I J13.0I J13.4I J14.2I
003 TRACK NUMBER, SOURCE [15 BIT]	THE TN OF THE UNIT (I.E., JU OR PU) THAT ORIGINATED THE MESSAGE.	HEADER		
004 TRACK NUMBER, FRIENDLY WEAPON [19 BIT]	THE TN OF THE FRIENDLY WEAPON.	J9.0E0	J10.2C2	
005 TRACK NUMBER, TARGET [19 BIT]	THE TN OF THE TARGET OF A FRIENDLY WEAPON SYSTEM.	J10.2I		
006 TRACK NUMBER, ADDRESSEE [15 BIT]	THE TN OF A UNIT (I.E., JU OR PU) TO WHICH A MESSAGE IS ADDRESSED.	J0.3I J1.5I J8.0I J9.1I J12.1I J12.4I J15.0I J31.1I	J0.4I J1.6I J8.1I J10.3I J12.2I J12.6C1 J28.20I RTT-A	J0.6I J7.6I J9.0I J12.0I J12.3I J14.2I J31.0I
007 TRACK NUMBER, RELATED [19 BIT]	THE TN OF A JU OR POINT THAT IS RELATED TO THE REFERENCE TN IN THE MESSAGE.	J3.0C2	J7.6C3	

DFI NAME
769 TRACK NUMBER, LINK 16

DUI NAME	EXPLANATION	APPLICABILITY		
008 TRACK NUMBER, ASSOCIATED [19 BIT]	THE TN OF AN ENTITY THAT IS ASSOCIATED WITH THE SUBJECT TN OF THE MESSAGE.	J7.7I	J14.2E0	
009 TRACK NUMBER, ORIGIN [19 BIT]	THE TN IDENTIFYING THE LOCATION OF THE REPORTED BEARING'S ORIGIN, E.G., A UNIT'S LOCATION, OTHER TRACK, OR A POINT.	J3.7C1 J14.2C1	J5.4C2	J14.0E0
010 TRACK NUMBER, OBJECTIVE [19 BIT]	THE TN OF THE OBJECT OF THE ACTION DESCRIBED IN THE MESSAGE.	J6.0E0 J10.3E0 J12.5I	J9.0I J10.6I J12.6E0	J9.1I J12.0I J17.0I
011 TRACK NUMBER, JU 9 [15 BIT]	THE TN OF ONE OF A NUMBER OF JUS TO WHICH A MESSAGE CAN BE ADDRESSED.	J1.1E0	J1.1C1	
012 TRACK NUMBER, JU 10 [15 BIT]	THE TN OF ONE OF A NUMBER OF JUS TO WHICH A MESSAGE CAN BE ADDRESSED.	J1.1E0	J1.1C1	
013 TRACK NUMBER, JU 11 [15 BIT]	THE TN OF ONE OF A NUMBER OF JUS TO WHICH A MESSAGE CAN BE ADDRESSED.	J1.1E0		
014 TRACK NUMBER, DEMAND ORIGINATOR B [15 BIT]	THE TRACK NUMBER OF THE UNIT ORIGINATING THE DEMAND (B).	J0.7E0		
015 TRACK NUMBER, INTERCOMMUNITY COMMUNICANT [15 BIT]	THE TN OF THE INTERCOMMUNITY COMMUNICANT BEING REPORTED IN THE MESSAGE.	J1.4I		
016 TRACK NUMBER, ADDRESSEE 6 [15 BIT]	THE TN OF ONE OF A NUMBER OF UNITS (I.E., JUS OR PUS) TO WHICH A MESSAGE CAN BE ADDRESSED.	J1.6E0		
017 TRACK NUMBER, ADDRESSEE 1 [15 BIT]	THE TN OF ONE OF A NUMBER OF UNITS (I.E., JUS OR PUS) TO WHICH A MESSAGE CAN BE ADDRESSED.	J1.6E0	J7.1I	J7.3I
018 TRACK NUMBER, PREVIOUSLY REPORTED [19 BIT]	THE TN THAT WAS PREVIOUSLY USED TO REPORT THE TRACK THAT NOW HAS THE EMERGENCY.	J3.1I		

APPENDIX B

DFI NAME
769 TRACK NUMBER, LINK 16

DUI NAME	EXPLANATION	APPLICABILITY
019 TRACK NUMBER, ADDRESSEE 2 [15 BIT]	THE TN OF ONE OF A NUMBER OF UNITS (I.E., JUS OR PUS) TO WHICH A MESSAGE CAN BE ADDRESSED.	J1.6E0 J7.1C1 J7.3C1
020 TRACK NUMBER, ADDRESSEE 3 [15 BIT]	THE TN OF ONE OF A NUMBER OF UNITS (I.E., JUS OR PUS) TO WHICH A MESSAGE CAN BE ADDRESSED.	J1.6E0 J7.1C1 J7.3C1
021 TRACK NUMBER, ADDRESSEE 4 [15 BIT]	THE TN OF ONE OF A NUMBER OF UNITS (I.E., JUS OR PUS) TO WHICH A MESSAGE CAN BE ADDRESSED.	J1.6E0 J7.1C1 J7.3C1
022 TRACK NUMBER, ADDRESSEE 5 [15 BIT]	THE TN OF ONE OF A NUMBER OF UNITS (I.E., JUS OR PUS) TO WHICH A MESSAGE CAN BE ADDRESSED.	J1.6E0 J7.1C1 J7.3C1
023 TRACK NUMBER, JU 8 [15 BIT]	THE TN OF ONE OF A NUMBER OF JUS TO WHICH A MESSAGE CAN BE ADDRESSED.	J1.1E0 J1.1C1
024 TRACK NUMBER, NEW CONTROL AGENCY [19 BIT]	THE TN OF THE CONTROLLING UNIT THAT WILL ASSUME CONTROL OF AN AIRCRAFT WHEN THE ACTION TO CHANGE CONTROLLING AGENCIES IS UNDER- TAKEN.	J12.4I
025 TRACK NUMBER, TARGET A [19 BIT]	THE TN OF ONE OF A NUMBER OF TARGETS THAT ARE ASSIGNED TO THE REFERENCE TN.	J10.2C1
026 TRACK NUMBER, TARGET B [19 BIT]	THE TN OF ONE OF A NUMBER OF TARGETS THAT ARE ASSIGNED TO THE REFERENCE TN.	J10.2C1
027 TRACK NUMBER, DEMAND ORIGINATOR C [15 BIT]	THE TRACK NUMBER OF THE UNIT ORIGINATING THE DEMAND (C).	J0.7E0
028 TRACK NUMBER, SUBJECT [19 BIT]	THE TN OF A TRACK OR POINT THAT IS BEING ASSOCIATED WITH THE ASSOCIATED TN.	J7.7I

DFI NAME
769 TRACK NUMBER, LINK 16

DUI NAME	EXPLANATION	APPLICABILITY
029 TRACK NUMBER, RETAINED [19 BIT]	THE TN THAT HAS BEEN IDENTIFIED TO BE RETAINED WHEN A DUAL DESIGNATION PROBLEM EXISTS.	J7.2I
030 TRACK NUMBER, DROPPED [19 BIT]	THE TN THAT HAS BEEN IDENTIFIED TO BE DROPPED WHEN A DUAL DESIGNATION PROBLEM EXISTS.	J7.2I
031 TRACK NUMBER, CONTROLLING AGENCY OF TN REFERENCE [19 BIT]	THE TN THAT IDENTIFIES THE AGENCY THAT IS CONTROLLING THE REFERENCE TN.	J6.0E0
032 TRACK NUMBER, JU 1 [15 BIT]	THE TN OF ONE OF A NUMBER OF JUS TO WHICH A MESSAGE CAN BE ADDRESSED.	J1.0I J1.1I
033 TRACK NUMBER, JU 2 [15 BIT]	THE TN OF ONE OF A NUMBER OF JUS TO WHICH A MESSAGE CAN BE ADDRESSED.	J1.0I J1.1I
034 TRACK NUMBER, JU 3 [15 BIT]	THE TN OF ONE OF A NUMBER OF JUS TO WHICH A MESSAGE CAN BE ADDRESSED.	J1.0I J1.1I
035 TRACK NUMBER, JU 4 [15 BIT]	THE TN OF ONE OF A NUMBER OF JUS TO WHICH A MESSAGE CAN BE ADDRESSED.	J1.0E0 J1.1E0
036 TRACK NUMBER, JU 5 [15 BIT]	THE TN OF ONE OF A NUMBER OF JUS TO WHICH A MESSAGE CAN BE ADDRESSED.	J1.0E0 J1.1E0
037 TRACK NUMBER, JU 6 [15 BIT]	THE TN OF ONE OF A NUMBER OF JUS TO WHICH A MESSAGE CAN BE ADDRESSED.	J1.0E0 J1.1E0
038 TRACK NUMBER, JU 7 [15 BIT]	THE TN OF ONE OF A NUMBER OF JUS TO WHICH A MESSAGE CAN BE ADDRESSED.	J1.0E0 J1.1E0
039 TRACK NUMBER, FLIGHT LEAD [15 BIT]	THE TN OF THE FLIGHT LEADER OF THE FLIGHT THAT THE MESSAGE ORIGINATOR IS A MEMBER OF. THIS TN MAY BE OWN UNIT TN.	J2.2C5
040 TRACK NUMBER, RELATED 1 [19 BIT]	THE TN OF A JU OR POINT THAT IS RELATED TO THE REFERENCE TN IN THE MESSAGE.	J3.0C4

DFI NAME
769 TRACK NUMBER, LINK 16

DUI NAME	EXPLANATION	APPLICABILITY
041 TRACK NUMBER, MISSION COMMANDER [15 BIT]	THE TN OF THE COMMANDER OF A MISSION THAT THE MESSAGE ORIGINATOR IS A MEMBER OF. THIS TN MAY BE OWN UNIT TN.	J2.2C5
042 TRACK NUMBER, INDEX ORIGINATOR [15 BIT]	THE TN OF THE UNIT ORIGINATING THE INDEX NUMBER, THIRD PARTY.	J12.0C7 J12.6C2
043 TRACK NUMBER, RELATED 3 [19 BIT]	THE TRACK NUMBER OF THE TARGET THAT IS RELATED TO THE OBJECTIVE TN IN THE MESSAGE.	J12.0C6
044 TRACK NUMBER, RELATED 2 [19 BIT]	TN OF BALLISTIC MISSILE TRACK THAT IS RELATED TO THE REFERENCE TN OF THE BALLISTIC MISSILE LAUNCH/IMPACT POINT MESSAGE.	J3.0C5
048 TRACK NUMBER, INDEX ORIGINATOR A [15 BIT]	THE TN OF THE UNIT ORIGINATING THE INDEX NUMBER.	J12.5I
049 TRACK NUMBER, INDEX ORIGINATOR B [15 BIT]	THE TN OF THE UNIT ORIGINATING THE INDEX NUMBER.	J12.5E0
050 TRACK NUMBER, INDEX ORIGINATOR C [15 BIT]	THE TN OF THE UNIT ORIGINATING THE INDEX NUMBER.	J12.5E0
051 TRACK NUMBER, INDEX ORIGINATOR D [15 BIT]	THE TN OF THE UNIT ORIGINATING THE INDEX NUMBER.	J12.5E0
052 TRACK NUMBER, INDEX ORIGINATOR E [15 BIT]	THE TN OF THE UNIT ORIGINATING THE INDEX NUMBER.	J12.5E1
053 TRACK NUMBER, INDEX ORIGINATOR F [15 BIT]	THE TN OF THE UNIT ORIGINATING THE INDEX NUMBER.	J12.5E1

B-457

MIL-STD-6016B
APPENDIX B

DFI NAME
769 TRACK NUMBER, LINK 16

DUI NAME	EXPLANATION	APPLICABILITY
054 TRACK NUMBER, INDEX ORIGINATOR G [15 BIT]	THE TN OF THE UNIT ORIGINATING THE INDEX NUMBER.	J12.5E1
055 TRACK NUMBER, THREAT [19 BIT]	THE TN OF THE THREAT IDENTIFIED IN THE MESSAGE.	J15.0I
056 TRACK NUMBER, JU [15 BIT]	THE TN OF A JU TO WHICH A MESSAGE IS ADDRESSED.	J1.3I
057 TRACK NUMBER, SECONDARY 1 [15 BIT]	THE TN OF A JU THAT IS CONSIDERED AS A SECONDARY TN DURING THE NET CONTROL INITIALIZATION PROCESS.	J1.5C1
058 TRACK NUMBER, SECONDARY 2 [15 BIT]	THE TN OF A JU THAT IS CONSIDERED AS A SECONDARY TN DURING THE NET CONTROL INITIALIZATION PROCESS.	J1.5C1
059 TRACK NUMBER, SECONDARY 3 [15 BIT]	THE TN OF A JU THAT IS CONSIDERED AS A SECONDARY TN DURING THE NET CONTROL INITIALIZATION PROCESS.	J1.5C1
060 TRACK NUMBER, SECONDARY 4 [15 BIT]	THE TN OF A JU THAT IS CONSIDERED AS A SECONDARY TN DURING THE NET CONTROL INITIALIZATION PROCESS.	J1.5C1
061 TRACK NUMBER, SPECIFIED [15 BIT]	THE TN OF THE UNIT THAT IS REQUESTING THE OVER-THE-AIR REKEYING MESSAGE.	J31.0C1
062 TRACK NUMBER, TARGETED [19 BIT]	THE TN OF THE OBJECT, THAT THE THREAT TN IS TARGETED AGAINST.	J15.0E0
063 TRACK NUMBER, ORIGINATOR [15 BIT]	THE TN OF THE JU AT THE ORIGIN OF THE ROUTE ESTABLISHMENT MESSAGE.	J1.2I
064 TRACK NUMBER, DESTINATION [15 BIT]	THE TN OF THE JU TO WHICH THE MESSAGE IS ADDRESSED.	J1.2I
065 TRACK NUMBER, RELAY 1 [15 BIT]	THE TN OF THE FIRST RELAY UNIT ON THE ROUTE.	J1.2E0

APPENDIX B

DFI NAME
769 TRACK NUMBER, LINK 16

DUI NAME	EXPLANATION	APPLICABILITY
066 TRACK NUMBER, RELAY 2 [15 BIT]	THE TN OF THE SECOND RELAY UNIT ON THE ROUTE.	J1.2E0
067 TRACK NUMBER, RELAY 3 [15 BIT]	THE TN OF THE THIRD RELAY UNIT ON THE ROUTE.	J1.2E0
068 TRACK NUMBER, RELAY 4 [15 BIT]	THE TN OF THE FOURTH RELAY UNIT ON THE ROUTE.	J1.2E0
069 TRACK NUMBER, RELAY 5 [15 BIT]	THE TN OF THE FIFTH RELAY UNIT ON THE ROUTE.	J1.2E1
070 TRACK NUMBER, RELAY 6 [15 BIT]	THE TN OF THE SIXTH RELAY UNIT ON THE ROUTE.	J1.2E1
071 TRACK NUMBER, RELAY 7 [15 BIT]	THE TN OF THE SEVENTH RELAY UNIT ON THE ROUTE.	J1.2E1

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001, 003, 006, 011-017, 019-023, 027, 032-039, 041, 042, 044, ----- ----- 048-054, 056-061, AND 063-071 -----		
NO STATEMENT	0	
NUMERIC	00001 THROUGH 00076 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU).
ILLEGAL	00077 (OCTAL)	
NUMERIC	00100 THROUGH 00175 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU).
NUMERIC	00176 (OCTAL)	RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.
NUMERIC	00177 (OCTAL)	COLLECTIVE ADDRESS.
NUMERIC	00200 THROUGH 07776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
ILLEGAL	07777 (OCTAL)	
NUMERIC	10000 THROUGH 77776 (OCTAL)	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL

DFI NAME
769 TRACK NUMBER, LINK 16

DATA ITEM (CONTINUED) (CONTINUED)	BIT CODE	EXPLANATION
NUMERIC	77777 (OCTAL)	INFORMATION REPORTING. E.G., TRACKS AND REFERENCE POINTS. ASSIGNED AS THE NETWORK MANAGER DEDICATED ADDRESS.
----- FOR DUIS 002, 004-005, 007-010, 018, 024-026, 028-031, 040, 043, 055, ----- ----- AND 062		-----

THE NINETEEN BITS OF THIS TN ARE
DIVIDED INTO FIVE GROUPS
CONSISTING OF TWO FIVE-BIT GROUPS
AND THREE THREE-BIT GROUPS. EACH
FIVE-BIT GROUP REPRESENTS AN
ALPHANUMERIC CHARACTER OF EITHER
AN ALPHA CHARACTER OF A THROUGH Z
(EXCLUDING THE ALPHA CHARACTERS I
AND O) OR A NUMERIC CHARACTER OF
ZERO THROUGH SEVEN. EACH THREE-
BIT GROUP REPRESENTS A NUMERIC
CHARACTER OF ZERO THROUGH SEVEN.
THEREFORE, ANY TN CAN BE
REPRESENTED BY AANNN WHERE A IS AN
ALPHANUMERIC CHARACTER CODED WITH
FIVE BITS AND N IS A NUMERIC
CHARACTER CODED WITH THREE BITS.
CODING FOR A FIVE BIT ALPHANUMERIC
CHARACTER IS SHOWN BELOW. CODING
FOR A THREE BIT NUMERIC CHARACTER
IS EXACTLY THE SAME AS ZERO
THROUGH SEVEN OF THE FIVE BIT
ALPHANUMERIC CHARACTER WITH THE
FIRST TWO LEADING ZEROES DELETED.

CODING	CHARACTER
00000	0
00001	1
00010	2
00011	3
00100	4
00101	5
00110	6

DFI NAME
769 TRACK NUMBER, LINK 16

DATA ITEM (CONTINUED)
(CONTINUED)

BIT CODE

EXPLANATION

		00111	7
		01000	A
		01001	B
		01010	C
		01011	D
		01100	E
		01101	F
		01110	G
		01111	H
		10000	J
		10001	K
		10010	L
		10011	M
		10100	N
		10101	P
		10110	Q
		10111	R
		11000	S
		11001	T
		11010	U
		11011	V
		11100	W
		11101	X
		11110	Y
		11111	Z
00000	0	NO STATEMENT.	
00001-00076	1 THROUGH 62	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, PU, FJU, AND FPU). ILLEGAL.	
00077	63	ASSIGNED AS IDENTIFICATION NUMBERS FOR C2 IUS (JU, RU, FJU, AND FRU). RESERVED FOR USE AS THE PSEUDO SOURCE TRACK NUMBER ADDRESS.	
00100-00175	64 THROUGH 125	COLLECTIVE ADDRESS.	
00176	126	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 IUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.	
00177	127	ILLEGAL.	
00200-07776	128 THROUGH 4094	ALLOCATED IN BLOCKS TO C2 JUS TO BE	
07777	4095		
0A000-0Z777	4096 THROUGH 16383		

APPENDIX B

DFI NAME
769 TRACK NUMBER, LINK 16

DATA ITEM (CONTINUED) (CONTINUED)	BIT CODE	EXPLANATION
10000-17777	16384 THROUGH 20479	USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS. ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
1A000-1Z777	20480 THROUGH 32767	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
20000-27777	32768 THROUGH 36863	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
2A000-2Z777	36864 THROUGH 49151	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
30000-37777	49152 THROUGH 53247	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
3A000-3Z777	53248 THROUGH 65535	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
40000-47777	65536 THROUGH 69631	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
4A000-4Z777	69632 THROUGH 81919	ALLOCATED IN BLOCKS TO C2 JUS TO BE USED FOR TACTICAL INFORMATION REPORTING, E.G., TRACKS AND REFERENCE POINTS.
50000-57777	81920 THROUGH 86015	ASSIGNED AS IDENTIFICATION NUMBERS FOR JUS AND ALLOCATED IN BLOCKS TO

DFI NAME
769 TRACK NUMBER, LINK 16

DATA ITEM (CONTINUED)
(CONTINUED)

BIT CODE

EXPLANATION
C2 JUS TO BE USED FOR TACTICAL
INFORMATION REPORTING, E.G.,
TRACKS AND REFERENCE POINTS.
ALLOCATED IN BLOCKS TO C2 JUS TO BE
USED FOR TACTICAL INFORMATION
REPORTING, E.G., TRACKS AND
REFERENCE POINTS.
ASSIGNED AS IDENTIFICATION NUMBERS
FOR JUS AND ALLOCATED IN BLOCKS TO
C2 JUS TO BE USED FOR TACTICAL
INFORMATION REPORTING, E.G.,
TRACKS AND REFERENCE POINTS.
ALLOCATED IN BLOCKS TO C2 JUS TO BE
USED FOR TACTICAL INFORMATION
REPORTING, E.G., TRACKS AND
REFERENCE POINTS.
ASSIGNED AS IDENTIFICATION NUMBERS
FOR JUS AND ALLOCATED IN BLOCKS TO
C2 JUS TO BE USED FOR TACTICAL
INFORMATION REPORTING, E.G.,
TRACKS AND REFERENCE POINTS.
ASSIGNED AS THE NETWORK MANAGER
DEDICATED ADDRESS.
ALLOCATED IN BLOCKS TO C2 JUS TO BE
USED FOR TACTICAL INFORMATION
REPORTING, E.G., TRACKS AND
REFERENCE POINTS.

5A000-5Z777

86016 THROUGH 98303

60000-67777

98304 THROUGH 102399

6A000-6Z777

102400 THROUGH 114687

70000-77776

114688 THROUGH 118782

77777

118783

7A000-ZZ777

118784 THROUGH 524287

DFI NAME
771 LORAN FILTER SETTING

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 LORAN FILTER SETTING [16 BIT]	USED TO PRESET LORAN FILTER TO RE- JECT REPORTED INTERFERENCE. COM- PLETE WORD IS INSERTABLE INTO LORAN EQUIPMENT TO SELECT FILTERS.	J14.2C6

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
130/65,536 THROUGH	1 THROUGH 65535	IN 130/65,536 KHZ INCREMENTS (APPROX. 2HZ).
129 65,406/65,536 KHZ		

DFI NAME DEFINITION
775 CLOUD COVER SPECIFIES THE EXTENT OF THE CLOUD COVERAGE.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
003 CLOUD COVER, 1 [2 BIT] (CC1)		J13.0C1 J17.0I
004 CLOUD COVER, 2 [2 BIT] (CC2)		J13.0C1
005 CLOUD COVER, 3 [2 BIT] (CC3)		J13.0C1

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 003-005 -----		
SKY CLEAR	0	FIELD NOT INTERPRETED IF THE CORRESPONDING CLOUD HEIGHT IS SET TO A VALUE OTHER THAN 1 THROUGH 61. SKY CLEAR IS DEFINED AS LESS THAN 1 OKTA (OR LESS THAN 0.1 SKY COVER).
SCATTERED	1	1-4 OKTAS (0.1 THROUGH 0.5 SKY COVER).
BROKEN	2	5-7 OKTAS (0.6 THROUGH 0.9 SKY COVER).
OVERCAST	3	8 OKTAS (MORE THAN 0.9 SKY COVER).

B-465

MIL-STD-6016B
APPENDIX B

DFI	NAME	DEFINITION
777	ADD/DELETE INDICATOR	AN INDICATION OF WHETHER TO ADD OR DELETE THE SECONDARY TRACK NUMBERS.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 ADD/DELETE INDICATOR [1 BIT] (A/D IND)	USED TO INDICATE WHETHER TO ADD OR DELETE THE SECONDARY TNS THAT FOLLOW.	J1.5C1

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
ADD	0	
DELETE	1	

DFI NAME DEFINITION
789 ALTIMETER SETTING THE VALUE OF ATMOSPHERIC PRESSURE TO WHICH THE SCALE OF A
PRESSURE ALTIMETER IS SET.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY	
001 QNH [7 BIT]	ALTIMETER SET TO READ ZERO AT MEAN SEA LEVEL.	J13.0I	J17.0E0
002 QFE [7 BIT]	UK NATIONAL USE ONLY. ALTIMETER SET TO READ ZERO AT AIRFIELD RUNWAY (GROUND LEVEL).	J13.0E0	

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001 AND 002 -----		
NO STATEMENT	0	
950 THROUGH 1050 HECTOPASCALS	1 THROUGH 101	IN 1 HECTOPASCAL INCREMENTS.
ILLEGAL	102 THROUGH 127	

B-467

MIL-STD-6016B
APPENDIX B

DFI NAME DEFINITION
792 HOUR EXPRESSES TIME OF DAY OR A PERIOD OF TIME IN HOURS.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
001 HOUR [5 BIT]	EXPRESSES TIME OF DAY OR A PERIOD OF TIME IN HOURS.	J3.0I J3.3C1 J3.7I J12.0C4 J13.3I J14.0I	J3.1E0 J3.4C1 J5.4I J12.3I J13.5I J14.2E0	J3.2C1 J3.5C1 J9.0C2 J13.2I J13.5C1 J17.0E0
002 EFFECTIVE FROM HOUR [5 BIT]	THE HOUR OF THE DAY THAT AN ASSIGNMENT, ETC., OR CANCELLATION IS TO BECOME EFFECTIVE.	J0.6C3		
003 TIME OF OBSERVATION, HOUR [5 BIT]	THE HOUR OF THE DAY REPORTED AS THE OFFICIAL TIME OF OBSERVATION OF THE WEATHER INFORMATION.	J13.0I		
007 EXECUTE HOURS [5 BIT]	THE HOUR WHEN THE ADDRESSEE SHALL PERFORM THE ACTION INDICATED IN THE OVER-THE-AIR REKEYING ACTION CODE.	J31.0I		

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001-003, AND 007 -----		
0 HOUR	0	
1 THROUGH 23 HOURS	1 THROUGH 23	IN ONE HOUR INCREMENTS.
ILLEGAL	24 THROUGH 30	
NO STATEMENT	31	

B-468

MIL-STD-6016B
APPENDIX B

DFI	NAME	DEFINITION	
795	ACKNOWLEDGEMENT DATA DESIGNATOR	INDICATES THE TYPE OF ACKNOWLEDGEMENT RECEIVED.	
DATA STANDARD USAGE: Link 16		STATUS:	
DUI	NAME	EXPLANATION	APPLICABILITY
001	ACKNOWLEDGEMENT DATA DESIGNATOR [1 BIT] (ACK DD)	INDICATES THE TYPE OF ACKNOWLEDGE- MENT RECEIVED.	J1.3I
DATA ITEM		BIT CODE	EXPLANATION
----- FOR DUI 001 -----			
ROUTE ABORT		0	
MESSAGE ACKNOWLEDGED		1	INDICATES THE END OF THE MESSAGE ACKNOWLEDGEMENT.

DFI NAME DEFINITION
796 ACKNOWLEDGEMENT DATA AMPLIFIER AMPLIFIES THE TYPE OF ACKNOWLEDGEMENT REPORTED IN THE
ACKNOWLEDGEMENT DATA DESIGNATOR FIELD.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 ACKNOWLEDGEMENT DATA AMPLIFIER [1 BIT] (ACK DA)	AMPLIFIES THE TYPE OF ACKNOWLEDGE- MENT REPORTED IN THE ACKNOWLEDGE- MENT DATA DESIGNATOR FIELD.	J1.3I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
MESSAGE RECEIPTED	0	
ERRONEOUS/MISSING BLOCK DETECTED	1	

APPENDIX B

DFI NAME DEFINITION
797 MINUTE EXPRESSES THE MINUTE OF THE HOUR.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 EFFECTIVE FROM MINUTE [6 BIT]	THE MINUTE THAT AN ASSIGNMENT, ETC., OR CANCELLATION IS TO BECOME EFFECTIVE.	J0.6C3
002 TIME OF EVENT, MINUTE [6 BIT]	THE MINUTE (NETWORK TIME) AT WHICH THE EVENT WILL OCCUR AGAINST THE TARGET. THE MINUTE IS THE NEXT OCCURRENCE OF THE MINUTE SPECIFIED, WITH RESPECT TO NETWORK TIME.	J12.6C5
003 TIME OF OBSERVATION, MINUTE [6 BIT] (TOMIN)	THE MINUTE OF THE HOUR REPORTED AS THE OFFICIAL TIME OF OBSERVATION OF THE WEATHER INFORMATION.	J13.0I
004 MINUTE [6 BIT]	THE MINUTE OF THE HOUR.	J3.0I J3.1E0 J3.2C1 J3.3C1 J3.4C1 J3.5C1 J3.6I J3.7I J5.4I J9.0C2 J10.2C2 J12.0C4 J12.3I J12.6C2 J12.7E1 J13.2I J13.3I J13.5I J13.5C1 J14.0I J14.2E0 J17.0E0
007 EXECUTE MINUTES [6 BIT]	THE MINUTE OF THE EXECUTE HOUR WHEN THE ADDRESSEE SHALL PERFORM THE ACTION INDICATED IN THE OVER-THE-AIR REKEYING ACTION CODE.	J31.0I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001-004, AND 007 -----		
0 THROUGH 59	0 THROUGH 59	IN ONE MINUTE INCREMENTS.
ILLEGAL	60 THROUGH 62	
NO STATEMENT	63	

DFI NAME DEFINITION
798 BLOCK SIZE INDICATOR INDICATES HOW THE BLOCK IS TO BE INTERPRETED.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 BLOCK SIZE INDICATOR [1 BIT] (BSI)	INDICATES HOW THE BLOCK IS TO BE INTERPRETED.	J1.3I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
REED SOLOMON CODEWORD	0	INDICATES THE BLOCK IS A REED SOLOMON CODEWORD.
TIME SLOT	1	INDICATES THE BLOCK IS A TIME SLOT.

DFI NAME DEFINITION
 799 SEQUENTIAL BLOCK/FIELD FLAG INDICATES THE CONDITION OF THE RECEIVED BLOCKS.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 SEQUENTIAL BLOCK/FIELD FLAG, 1 [1 BIT] (SBF F1)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3I
002 SEQUENTIAL BLOCK/FIELD FLAG, 2 [1 BIT] (SBF F2)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3I
003 SEQUENTIAL BLOCK/FIELD FLAG, 3 [1 BIT] (SBF F3)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3I
004 SEQUENTIAL BLOCK/FIELD FLAG, 4 [1 BIT] (SBF F4)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3I
005 SEQUENTIAL BLOCK/FIELD FLAG, 5 [1 BIT] (SBF F5)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3I
006 SEQUENTIAL BLOCK/FIELD FLAG, 6 [1 BIT] (SBF F6)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3I
007 SEQUENTIAL BLOCK/FIELD FLAG, 7 [1 BIT] (SBF F7)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3I
008 SEQUENTIAL BLOCK/FIELD FLAG, 8 [1 BIT] (SBF F8)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3I
009 SEQUENTIAL BLOCK/FIELD FLAG, 9 [1 BIT] (SBF F9)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3I
010 SEQUENTIAL BLOCK/FIELD FLAG, 10 [1 BIT] (SBF F10)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3I
011 SEQUENTIAL BLOCK/FIELD FLAG, 11 [1 BIT] (SBF F11)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3I
012 SEQUENTIAL BLOCK/FIELD FLAG, 12 [1 BIT] (SBF F12)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3I

APPENDIX B

DFI NAME
799 SEQUENTIAL BLOCK/FIELD FLAG

DUI NAME	EXPLANATION	APPLICABILITY
013 SEQUENTIAL BLOCK/FIELD FLAG, 13 [1 BIT] (SBF F13)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3I
014 SEQUENTIAL BLOCK/FIELD FLAG, 14 [1 BIT] (SBF F14)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3I
015 SEQUENTIAL BLOCK/FIELD FLAG, 15 [1 BIT] (SBF F15)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3I
016 SEQUENTIAL BLOCK/FIELD FLAG, 16 [1 BIT] (SBF F16)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3I
017 SEQUENTIAL BLOCK/FIELD FLAG, 17 [1 BIT] (SBF F17)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3I
018 SEQUENTIAL BLOCK/FIELD FLAG, 18 [1 BIT] (SBF F18)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3I
019 SEQUENTIAL BLOCK/FIELD FLAG, 19 [1 BIT] (SBF F19)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3I
020 SEQUENTIAL BLOCK/FIELD FLAG, 20 [1 BIT] (SBF F20)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3I
021 SEQUENTIAL BLOCK/FIELD FLAG, 21 [1 BIT] (SBF F21)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3I
022 SEQUENTIAL BLOCK/FIELD FLAG, 22 [1 BIT] (SBF F22)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3I

APPENDIX B

DFI NAME
799 SEQUENTIAL BLOCK/FIELD FLAG

DUI NAME	EXPLANATION	APPLICABILITY
023 SEQUENTIAL BLOCK/FIELD FLAG, 23 [1 BIT] (SBF F23)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3I
024 SEQUENTIAL BLOCK/FIELD FLAG, 24 [1 BIT] (SBF F24)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3I
025 SEQUENTIAL BLOCK/FIELD FLAG, 25 [1 BIT] (SBF F25)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3I
026 SEQUENTIAL BLOCK/FIELD FLAG, 26 [1 BIT] (SBF F26)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3I
027 SEQUENTIAL BLOCK/FIELD FLAG, 27 [1 BIT] (SBF F27)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3I
028 SEQUENTIAL BLOCK/FIELD FLAG, 28 [1 BIT] (SBF F28)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3I
029 SEQUENTIAL BLOCK/FIELD FLAG, 29 [1 BIT] (SBF F29)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3I
030 SEQUENTIAL BLOCK/FIELD FLAG, 30 [1 BIT] (SBF F30)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3I
031 SEQUENTIAL BLOCK/FIELD FLAG, 31 [1 BIT] (SBF F31)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3I
032 SEQUENTIAL BLOCK/FIELD FLAG, 32 [1 BIT] (SBF F32)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3I

APPENDIX B

DFI NAME
799 SEQUENTIAL BLOCK/FIELD FLAG

DUI NAME	EXPLANATION	APPLICABILITY
033 SEQUENTIAL BLOCK/FIELD FLAG, 33 [1 BIT] (SBF F33)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3I
034 SEQUENTIAL BLOCK/FIELD FLAG, 34 [1 BIT] (SBF F34)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3I
035 SEQUENTIAL BLOCK/FIELD FLAG, 35 [1 BIT] (SBF F35)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3I
036 SEQUENTIAL BLOCK/FIELD FLAG, 36 [1 BIT] (SBF F36)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3I
037 SEQUENTIAL BLOCK/FIELD FLAG, 37 [1 BIT] (SBF F37)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3I
038 SEQUENTIAL BLOCK/FIELD FLAG, 38 [1 BIT] (SBF F38)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3I
039 SEQUENTIAL BLOCK/FIELD FLAG, 39 [1 BIT] (SBF F39)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3I
040 SEQUENTIAL BLOCK/FIELD FLAG, 40 [1 BIT] (SBF F40)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
041 SEQUENTIAL BLOCK/FIELD FLAG, 41 [1 BIT] (SBF F41)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
042 SEQUENTIAL BLOCK/FIELD FLAG, 42 [1 BIT] (SBF F42)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0

APPENDIX B

DFI NAME
799 SEQUENTIAL BLOCK/FIELD FLAG

DUI NAME	EXPLANATION	APPLICABILITY
043 SEQUENTIAL BLOCK/FIELD FLAG, 43 [1 BIT] (SBF F43)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
044 SEQUENTIAL BLOCK/FIELD FLAG, 44 [1 BIT] (SBF F44)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
045 SEQUENTIAL BLOCK/FIELD FLAG, 45 [1 BIT] (SBF F45)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
046 SEQUENTIAL BLOCK/FIELD FLAG, 46 [1 BIT] (SBF F46)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
047 SEQUENTIAL BLOCK/FIELD FLAG, 47 [1 BIT] (SBF F47)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
048 SEQUENTIAL BLOCK/FIELD FLAG, 48 [1 BIT] (SBF F48)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
049 SEQUENTIAL BLOCK/FIELD FLAG, 49 [1 BIT] (SBF F49)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
050 SEQUENTIAL BLOCK/FIELD FLAG, 50 [1 BIT] (SBF F50)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
051 SEQUENTIAL BLOCK/FIELD FLAG, 51 [1 BIT] (SBF F51)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
052 SEQUENTIAL BLOCK/FIELD FLAG, 52 [1 BIT] (SBF F52)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0

DFI NAME
799 SEQUENTIAL BLOCK/FIELD FLAG

DUI NAME	EXPLANATION	APPLICABILITY
053 SEQUENTIAL BLOCK/FIELD FLAG, 53 [1 BIT] (SBF F53)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
054 SEQUENTIAL BLOCK/FIELD FLAG, 54 [1 BIT] (SBF F54)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
055 SEQUENTIAL BLOCK/FIELD FLAG, 55 [1 BIT] (SBF F55)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
056 SEQUENTIAL BLOCK/FIELD FLAG, 56 [1 BIT] (SBF F56)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
057 SEQUENTIAL BLOCK/FIELD FLAG, 57 [1 BIT] (SBF F57)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
058 SEQUENTIAL BLOCK/FIELD FLAG, 58 [1 BIT] (SBF F58)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
059 SEQUENTIAL BLOCK/FIELD FLAG, 59 [1 BIT] (SBF F59)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
060 SEQUENTIAL BLOCK/FIELD FLAG, 60 [1 BIT] (SBF F60)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
061 SEQUENTIAL BLOCK/FIELD FLAG, 61 [1 BIT] (SBF F61)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
062 SEQUENTIAL BLOCK/FIELD FLAG, 62 [1 BIT] (SBF F62)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0

DFI NAME
799 SEQUENTIAL BLOCK/FIELD FLAG

DUI NAME	EXPLANATION	APPLICABILITY
063 SEQUENTIAL BLOCK/FIELD FLAG, 63 [1 BIT] (SBF F63)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
064 SEQUENTIAL BLOCK/FIELD FLAG, 64 [1 BIT] (SBF F64)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
065 SEQUENTIAL BLOCK/FIELD FLAG, 65 [1 BIT] (SBF F65)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
066 SEQUENTIAL BLOCK/FIELD FLAG, 66 [1 BIT] (SBF F66)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
067 SEQUENTIAL BLOCK/FIELD FLAG, 67 [1 BIT] (SBF F67)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
068 SEQUENTIAL BLOCK/FIELD FLAG, 68 [1 BIT] (SBF F68)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
069 SEQUENTIAL BLOCK/FIELD FLAG, 69 [1 BIT] (SBF F69)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
070 SEQUENTIAL BLOCK/FIELD FLAG, 70 [1 BIT] (SBF F70)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
071 SEQUENTIAL BLOCK/FIELD FLAG, 71 [1 BIT] (SBF F71)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
072 SEQUENTIAL BLOCK/FIELD FLAG, 72 [1 BIT] (SBF F72)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0

DFI NAME
799 SEQUENTIAL BLOCK/FIELD FLAG

DUI NAME	EXPLANATION	APPLICABILITY
073 SEQUENTIAL BLOCK/FIELD FLAG, 73 [1 BIT] (SBF F73)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
074 SEQUENTIAL BLOCK/FIELD FLAG, 74 [1 BIT] (SBF F74)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
075 SEQUENTIAL BLOCK/FIELD FLAG, 75 [1 BIT] (SBF F75)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
076 SEQUENTIAL BLOCK/FIELD FLAG, 76 [1 BIT] (SBF F76)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
077 SEQUENTIAL BLOCK/FIELD FLAG, 77 [1 BIT] (SBF F77)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
078 SEQUENTIAL BLOCK/FIELD FLAG, 78 [1 BIT] (SBF F78)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
079 SEQUENTIAL BLOCK/FIELD FLAG, 79 [1 BIT] (SBF F79)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
080 SEQUENTIAL BLOCK/FIELD FLAG, 80 [1 BIT] (SBF F80)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
081 SEQUENTIAL BLOCK/FIELD FLAG, 81 [1 BIT] (SBF F81)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
082 SEQUENTIAL BLOCK/FIELD FLAG, 82 [1 BIT] (SBF F82)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0

DFI NAME
799 SEQUENTIAL BLOCK/FIELD FLAG

DUI NAME	EXPLANATION	APPLICABILITY
083 SEQUENTIAL BLOCK/FIELD FLAG, 83 [1 BIT] (SBF F83)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
084 SEQUENTIAL BLOCK/FIELD FLAG, 84 [1 BIT] (SBF F84)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
085 SEQUENTIAL BLOCK/FIELD FLAG, 85 [1 BIT] (SBF F85)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
086 SEQUENTIAL BLOCK/FIELD FLAG, 86 [1 BIT] (SBF F86)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
087 SEQUENTIAL BLOCK/FIELD FLAG, 87 [1 BIT] (SBF F87)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
088 SEQUENTIAL BLOCK/FIELD FLAG, 88 [1 BIT] (SBF F88)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
089 SEQUENTIAL BLOCK/FIELD FLAG, 89 [1 BIT] (SBF F89)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
090 SEQUENTIAL BLOCK/FIELD FLAG, 90 [1 BIT] (SBF F90)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
091 SEQUENTIAL BLOCK/FIELD FLAG, 91 [1 BIT] (SBF F91)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
092 SEQUENTIAL BLOCK/FIELD FLAG, 92 [1 BIT] (SBF F92)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0

DFI NAME
799 SEQUENTIAL BLOCK/FIELD FLAG

DUI NAME	EXPLANATION	APPLICABILITY
093 SEQUENTIAL BLOCK/FIELD FLAG, 93 [1 BIT] (SBF F93)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
094 SEQUENTIAL BLOCK/FIELD FLAG, 94 [1 BIT] (SBF F94)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
095 SEQUENTIAL BLOCK/FIELD FLAG, 95 [1 BIT] (SBF F95)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
096 SEQUENTIAL BLOCK/FIELD FLAG, 96 [1 BIT] (SBF F96)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
097 SEQUENTIAL BLOCK/FIELD FLAG, 97 [1 BIT] (SBF F97)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
098 SEQUENTIAL BLOCK/FIELD FLAG, 98 [1 BIT] (SBF F98)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
099 SEQUENTIAL BLOCK/FIELD FLAG, 99 [1 BIT] (SBF F99)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
100 SEQUENTIAL BLOCK/FIELD FLAG, 100 [1 BIT] (SBF 100)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
101 SEQUENTIAL BLOCK/FIELD FLAG, 101 [1 BIT] (SBF 101)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
102 SEQUENTIAL BLOCK/FIELD FLAG, 102 [1 BIT] (SBF 102)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0

APPENDIX B

DFI NAME
799 SEQUENTIAL BLOCK/FIELD FLAG

DUI NAME	EXPLANATION	APPLICABILITY
103 SEQUENTIAL BLOCK/FIELD FLAG, 103 [1 BIT] (SBF 103)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
104 SEQUENTIAL BLOCK/FIELD FLAG, 104 [1 BIT] (SBF 104)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
105 SEQUENTIAL BLOCK/FIELD FLAG, 105 [1 BIT] (SBF 105)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
106 SEQUENTIAL BLOCK/FIELD FLAG, 106 [1 BIT] (SBF 106)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
107 SEQUENTIAL BLOCK/FIELD FLAG, 107 [1 BIT] (SBF 107)	INDICATES THE CONDITION OF THE RECEIVED BLOCKS.	J1.3E0
DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001-107 -----		
ERRONEOUS/MISSING BLOCK	0	
CORRECTLY RECEIVED BLOCK	1	

DFI NAME
800 MESSAGE LENGTH

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME

EXPLANATION

APPLICABILITY

001 MESSAGE LENGTH INDICATOR
[3 BIT]

INDICATES THE NUMBER OF EXTENSION
PLUS CONTINUATION WORDS WHICH
FOLLOW THE INITIAL WORD.

J0.0I	J0.1I	J0.2I
J0.3I	J0.4I	J0.5I
J0.6I	J0.7I	J1.0I
J1.1I	J1.2I	J1.3I
J1.4I	J1.5I	J1.6I
J2.0I	J2.2I	J2.3I
J2.4I	J2.5I	J2.6I
J3.0I	J3.1I	J3.2I
J3.3I	J3.4I	J3.5I
J3.6I	J3.7I	J5.4I
J6.0I	J7.0I	J7.1I
J7.2I	J7.3I	J7.4I
J7.5I	J7.6I	J7.7I
J8.0I	J8.1I	J9.0I
J9.1I	J10.2I	J10.3I
J10.5I	J10.6I	J12.0I
J12.1I	J12.2I	J12.3I
J12.4I	J12.5I	J12.6I
J12.7I	J13.0I	J13.2I
J13.3I	J13.4I	J13.5I
J14.0I	J14.2I	J15.0I
J17.0I	J28.0I	J28.1I
J28.2I	J28.20I	J28.3I
J28.4I	J28.5I	J28.6I
J28.7I	J29.1I	J29.3I
J29.4I	J29.5I	J29.7I
J30.0I	J30.1I	J30.2I
J30.3I	J30.4I	J30.5I
J30.6I	J30.7I	J31.0I
J31.1I	J31.7I	

002 MESSAGE NUMBER
[8 BIT]

SEQUENCE NUMBER OF THIS MESSAGE IN A J28.20I
TEXT REPORT.

003 MESSAGE COUNT
[8 BIT]

TOTAL NUMBER OF MESSAGES IN A TEXT J28.20I
REPORT.

APPENDIX B

MIL-STD-6016B

APPENDIX B

DFI NAME
800 MESSAGE LENGTH

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO ADDITIONAL WORDS	0	
NUMBER OF ADDITIONAL WORDS	1 THROUGH 7	
----- FOR DUIS 002 AND 003 -----		
NO STATEMENT	0	
NUMERIC	1 THROUGH 240	
ILLEGAL	241 THROUGH 255	

DFI	NAME	DEFINITION
801	CRYPTOVARIABLE LOGICAL LABEL	LOGICALLY IDENTIFIES THE CRYPTOVARIABLE.

DATA STANDARD USAGE: Link 16

STATUS:

DUI	NAME	EXPLANATION	APPLICABILITY
001	CRYPTOVARIABLE LOGICAL LABEL, REQUEST [7 BIT]	THE CRYPTOVARIABLE LOGICAL LABEL FOR THE CRYPTOVARIABLE BEING REQUESTED.	J31.0C1
002	CRYPTOVARIABLE LOGICAL LABEL NUMBER ONE, RELAY [7 BIT] (CVL N1R)	A LOGICAL LABEL USED TO UNIQUELY IDENTIFY THE CRYPTOVARIABLE.	J0.4E0
003	CRYPTOVARIABLE LOGICAL LABEL NUMBER TWO, RELAY [7 BIT]	A LOGICAL LABEL USED TO UNIQUELY IDENTIFY THE CRYPTOVARIABLE.	J0.4E0
004	CRYPTOVARIABLE LOGICAL LABEL, REKEY [7 BIT]	THE CRYPTOVARIABLE LOGICAL LABEL OF THE CRYPTOVARIABLE THAT IS TO BE REKEYED.	J31.0C2 J31.1I
005	CRYPTOVARIABLE LOGICAL LABEL SYNCHRONIZATION [7 BIT]	THE CRYPTOVARIABLE LOGICAL LABEL OF THE CRYPTOVARIABLE TO BE USED FOR REKEY SYNCHRONIZATION.	J31.0C2
006	CRYPTOVARIABLE LOGICAL LABEL, MSEC INITIALIZATION [7 BIT]	A LOGICAL LABEL USED TO UNIQUELY IDENTIFY THE CRYPTOVARIABLE TO BE ADDED TO THE INITIALIZATION TABLE FOR THE SPECIFIED NET NUMBERS ON THE PARTICIPATION GROUP SPECIFIED BY THE CRYPTOVARIABLE ACTION CODE.	J0.6C4
007	CRYPTOVARIABLE LOGICAL LABEL A, TRANSEC [7 BIT]	A LOGICAL LABEL USED TO UNIQUELY IDENTIFY THE CRYPTOVARIABLE TO BE USED IN ACCORDANCE WITH THE ASSOCIATED CRYPTOVARIABLE ACTION CODE.	J0.6C3
008	CRYPTOVARIABLE LOGICAL LABEL B, TRANSEC [7 BIT]	A LOGICAL LABEL USED TO UNIQUELY IDENTIFY THE CRYPTOVARIABLE TO BE USED IN ACCORDANCE WITH THE ASSOCIATED CRYPTOVARIABLE ACTION CODE.	J0.6C3

APPENDIX B

DFI NAME
801 CRYPTOVARIABLE LOGICAL LABEL

DUI NAME	EXPLANATION	APPLICABILITY
009 CRYPTOVARIABLE LOGICAL LABEL C, MSEC [7 BIT]	A LOGICAL LABEL USED TO UNIQUELY IDENTIFY THE CRYPTOVARIABLE TO BE USED IN ACCORDANCE WITH THE ASSOCIATED CRYPTOVARIABLE ACTION CODE.	J0.6C3
010 CRYPTOVARIABLE LOGICAL LABEL D, MSEC [7 BIT]	A LOGICAL LABEL USED TO UNIQUELY IDENTIFY THE CRYPTOVARIABLE TO BE USED IN ACCORDANCE WITH THE ASSOCIATED CRYPTOVARIABLE ACTION CODE.	J0.6C3
011 CRYPTOVARIABLE LOGICAL LABEL LOCATION, 0 [7 BIT] (CVL L0)	THE CRYPTOVARIABLE LOGICAL LABEL OF THE CRYPTOVARIABLE STORED IN SDU LOCATION 0	J31.0E0
012 CRYPTOVARIABLE LOGICAL LABEL LOCATION, 1 [7 BIT] (CVL L1)	THE CRYPTOVARIABLE LOGICAL LABEL OF THE CRYPTOVARIABLE STORED IN SDU LOCATION 1	J31.0E0
013 CRYPTOVARIABLE LOGICAL LABEL LOCATION, 2 [7 BIT] (CVL L2)	THE CRYPTOVARIABLE LOGICAL LABEL OF THE CRYPTOVARIABLE STORED IN SDU LOCATION 2	J31.0E0
014 CRYPTOVARIABLE LOGICAL LABEL LOCATION, 3 [7 BIT] (CVL L3)	THE CRYPTOVARIABLE LOGICAL LABEL OF THE CRYPTOVARIABLE STORED IN SDU LOCATION 3	J31.0E0
015 CRYPTOVARIABLE LOGICAL LABEL LOCATION, 4 [7 BIT] (CVL L4)	THE CRYPTOVARIABLE LOGICAL LABEL OF THE CRYPTOVARIABLE STORED IN SDU LOCATION 4	J31.0E0
016 CRYPTOVARIABLE LOGICAL LABEL LOCATION, 5 [7 BIT] (CVL L5)	THE CRYPTOVARIABLE LOGICAL LABEL OF THE CRYPTOVARIABLE STORED IN SDU LOCATION 5	J31.0E0
017 CRYPTOVARIABLE LOGICAL LABEL LOCATION, 6 [7 BIT] (CVL L6)	THE CRYPTOVARIABLE LOGICAL LABEL OF THE CRYPTOVARIABLE STORED IN SDU LOCATION 6	J31.0E0

DFI NAME
801 CRYPTOVARIABLE LOGICAL LABEL

DUI NAME	EXPLANATION	APPLICABILITY
018 CRYPTOVARIABLE LOGICAL LABEL LOCATION, 7 [7 BIT] (CVL L7)	THE CRYPTOVARIABLE LOGICAL LABEL OF THE CRYPTOVARIABLE STORED IN SDU LOCATION 7	J31.0E0
019 CRYPTOVARIABLE LOGICAL LABEL NUMBER ONE [7 BIT]	A LOGICAL LABEL USED TO UNIQUELY IDENTIFY THE TRANSMISSION SECURITY (TRANSEC) CRYPTOVARIABLE.	J0.3E0
020 CRYPTOVARIABLE LOGICAL LABEL NUMBER TWO [7 BIT]	A LOGICAL LABEL USED TO UNIQUELY IDENTIFY THE TRANSMISSION SECURITY (MSEC) CRYPTOVARIABLE.	J0.3E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001-003 AND 005-020 -----		
NO STATEMENT	0	
LOGICAL LABEL	1 THROUGH 127	
----- FOR DUI 004 -----		
ILLEGAL	0	
LOGICAL LABEL	1 THROUGH 127	

APPENDIX B

DFI NAME DEFINITION
802 CRYPTOMODE INDICATOR INDICATES THE MODE OF CRYPTOGRAPHIC OPERATION.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 CRYPTOMODE INDICATOR [1 BIT] (CYP MDE)	INDICATES THE MODE OF CRYPTOGRAPHIC OPERATION.	J0.3E0
002 CRYPTOMODE INDICATOR, RELAY [1 BIT] (CYP MDE)	INDICATES THE MODE OF CRYPTOGRAPHIC OPERATION.	J0.4E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
COMMON VARIABLE MODE	0	INDICATES THE COMMON VARIABLE MODE WHERE BOTH MESSAGE SECURITY (MSEC) AND TRANSMISSION SECURITY (TRANSEC) ARE PROVIDED BY THE SAME CRYPTOVARIABLE. CRYPTOVARIABLE LOGICAL LABEL NUMBER ONE AND CRYPTOVARIABLE LOGICAL LABEL NUMBER TWO WILL BOTH CONTAIN THE SAME CRYPTOVARIABLE LABEL.
PARTITIONED VARIABLE MODE	1	INDICATES THE PARTITIONED VARIABLE MODE WHERE MSEC IS PROVIDED BY ONE CRYPTOVARIABLE, AND TRANSEC IS PROVIDED BY A DIFFERENT CRYPTOVARIABLE. CRYPTOVARIABLE LOGICAL LABEL NUMBER ONE WILL CONTAIN THE LABEL OF THE TRANSEC VARIABLE, AND CRYPTOVARIABLE LOGICAL LABEL NUMBER TWO WILL CONTAIN THE LABEL OF THE MSEC VARIABLE.
----- FOR DUI 002 -----		
COMMON VARIABLE MODE	0	INDICATES THE COMMON VARIABLE MODE WHERE BOTH MESSAGE SECURITY (MSEC) AND TRANSMISSION SECURITY (TRANSEC) ARE PROVIDED BY THE SAME CRYPTOVARIABLE. CRYPTOVARIABLE LOGICAL LABEL NUMBER ONE IS THE

APPENDIX B

DFI	NAME		
802	CRYPTOMODE INDICATOR		
	DATA ITEM (CONTINUED) (CONTINUED)	BIT CODE	EXPLANATION
	PARTITIONED VARIABLE MODE	1	RELAY RECEIVE CRYPTOVARIABLE AND CRYPTOVARIABLE LOGICAL LABEL TWO IS THE RELAY TRANSMIT VARIABLE. INDICATES THE PARTITIONED VARIABLE MODE WHERE MSEC IS PROVIDED BY ONE CRYPTOVARIABLE, AND TRANSEC IS PROVIDED BY A DIFFERENT CRYPTOVARIABLE. CRYPTOVARIABLE LOGICAL LABEL NUMBER ONE WILL CONTAIN THE LABEL OF THE TRANSEC VARIABLE, AND CRYPTOVARIABLE LOGICAL LABEL NUMBER TWO WILL CONTAIN THE LABEL OF THE MSEC VARIABLE FOR BOTH RELAY RECEIVE AND RELAY TRANSMIT TIME SLOTS.

DFI NAME DEFINITION
803 ACTION

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME EXPLANATION APPLICABILITY

001 ACTION CODE, TIME SLOT
ASSIGNMENT
[3 BIT] (ACT CDE) J0.3I

002 ACTION CODE
[4 BIT] (ACT CD) J0.3C2

DATA ITEM BIT CODE EXPLANATION

----- FOR DUI 001 -----

NO STATEMENT 0
DELETE ALL 1 DELETE ALL TIME SLOT ASSIGNMENTS FOR
THE PARTICIPATION GROUP INDICATED
OR ALL TIME SLOT ASSIGNMENTS IF
THE PARTICIPATION GROUP IS EQUAL
TO NO STATEMENT.

DELETE ALL TRANSMIT 2 DELETE ALL TRANSMIT TIME SLOT
ASSIGNMENTS FOR THE PARTICIPATION
GROUP INDICATED OR ALL TRANSMIT
TIME SLOT ASSIGNMENTS IF THE
PARTICIPATION GROUP IS EQUAL TO NO
STATEMENT.

DELETE ALL RECEIVE 3 DELETE ALL RECEIVE TIME SLOT
ASSIGNMENTS FOR THE PARTICIPATION
GROUP INDICATED OR ALL RECEIVE
TIME SLOT ASSIGNMENTS IF THE
PARTICIPATION GROUP IS EQUAL TO NO
STATEMENT.

UNDEFINED 4 THROUGH 7

----- FOR DUI 002 -----

MODIFY SET 0 MODIFY THE INDICATED SET IN
ACCORDANCE WITH THE ACTION
SPECIFIED IN THE ORIGINAL J0.3
MESSAGE.

SET CHANGE ORDER 1 CHANGE THE ACTIVE SET.

DFI NAME
803 ACTION

DATA ITEM (CONTINUED)
SET CHANGE ORDER WITH
START NET ENTRY
ILLEGAL

BIT CODE
2
3 THROUGH 15

EXPLANATION
CHANGE THE ACTIVE SET AND TRIGGER A
START NET ENTRY.

APPENDIX B

DFI NAME DEFINITION
 804 AIR SPECIFIC TYPE THE SPECIFIC TYPE OF POINT OR TRACK IN THE AIR.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
001 AIR SPECIFIC TYPE [12 BIT]	THE SPECIFIC TYPE OF POINT OR TRACK WITH AN ENVIRONMENT/CATEGORY OF AIR.	J3.2C1 J7.0C1 J13.2C1 J15.0C1	J3.7C5 J12.0C2 J14.0C5	J6.0E0 J12.6E0 J14.2C5
002 AIR AMBIGUOUS TYPE 1 [12 BIT]	IDENTIFIES THE TARGET SPECIFIC TYPE AS DETERMINED BY AN ONBOARD CORRELATION PROCESS IF THERE ARE NO AMBIGUITIES. IDENTIFIES THE MOST PROBABLE TARGET SPECIFIC TYPE IF AN ONBOARD CORRELATION PROCESS DETERMINED THAT THE SPECIFIC TYPE IS AMBIGUOUS. INFORMATION IN THIS FIELD SHALL BE DERIVED ONLY FROM ONBOARD SOURCES AS OPPOSED TO DATA LINK SOURCES.	J12.6C4	J12.7C2	
003 AIR AMBIGUOUS TYPE 2 [12 BIT]	IDENTIFIES THE SECOND MOST PROBABLE TARGET SPECIFIC TYPE IF AN ONBOARD CORRELATION PROCESS DETERMINES THAT THE SPECIFIC TYPE IS AMBIGUOUS. INFORMATION IN THIS FIELD SHALL BE DERIVED ONLY FROM ONBOARD SOURCES AS OPPOSED TO DATA LINK SOURCES.	J12.6C4	J12.7C2	

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001, 002, AND 003 -----		
NO STATEMENT	0	

DFI NAME
804 AIR SPECIFIC TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
----- FIGHTER -----		
F-4 PHANTOM II	1	
F-5 TIGER II	2	
F-8 CRUSADER	3	
F-14 TOMCAT	4	
F-15 EAGLE	5	
F-16 FIGHTING FALCON	6	
F-101 VOODOO	7	
F-104 STARFIGHTER	8	
F-105 THUNDERCHIEF	9	
F-106 DELTA DART	10	
F-111 (GENERAL DYNAMICS)	11	
F/A-18 HORNET	12	
EFA	13	
F-102	14	
F-100	15	
DISUSED	16	
DISUSED	17	
COMMANDO	18	
DISUSED	19	
DISUSED	20	
J-35 DRAKEN	21	
JAGUAR	22	
SUPER ETENDARD	23	
DISUSED	24	THROUGH 26
F-1 (MITSUBISHI)	27	
F-35XD DRAKEN	28	
DISUSED	29	
HF-24 MARUT (WIND SPIRIT)	30	
JA37 VIGGEN	31	
DISUSED	32	
SF-5 FREEDOM FIGHTER	33	
IAR-91 ORAO	34	
AJEET INVINCIBLE	35	
KFIR C2	36	
MIRAGE F1	37	
MIRAGE 3	38	

B - 494

MIL-STD-6016B
APPENDIX B

DFI NAME
804 AIR SPECIFIC TYPE

DATA ITEM (CONTINUED)	BIT CODE (CONTINUED)	EXPLANATION
----- FIGHTER -----		
MIRAGE 5	39	
MIRAGE 50	40	
MIRAGE 2000	41	
DISUSED	42	
DISUSED	43	
ALPHA JET	44	
KEFIR	45	
F-6 FARMER	46	
F-8 FISHBED	47	
F-9 FANTAN	48	
F-12 (CHINA)	49	
SU-7 FITTER	50	
SU-9 FISHPOT	51	
SU-11 FLAGON	52	
SU-15 FLAGON	53	
SU-17 FITTER	54	
SU-19 FENCER	55	
SU-20 FITTER	56	
SU-22 FITTER	57	
SU-24 FENCER	58	
SU-25 FROGFOOT	59	
TU-28 FIDDLER	60	
TU-128 FIDDLER	61	
MIG-21 FISHBED	62	
MIG-23 FLOGGER	63	
MIG-25 FOXBAT	64	
MIG-27 FLOGGER	65	
YAK-28 FIREBAR	66	
YAK-36 FORGER	67	
AAF "RAM-J"	68	
MIG-15 FAGOT	69	
MIG-17 FRESCO	70	
MIG-19 FARMER	71	
SU-27 FLANKER	72	
MIG-29 FULCRUM	73	
MIG-31 FOXHOUND	74	
YAK-38 FORGER-A	75	

B - 495

DFI NAME
804 AIR SPECIFIC TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
-----	(CONTINUED)	
FIGHTER		

F-22 RAPTOR	76	
F-84 THUNDERSTREAK	77	
F-86 SABRE	78	
F/A2 SEA HARRIER	79	
IDF CHING-KUO (TAIWAN)	80	
JAS-39 GRIPPEN	81	
JIAN JI-7	82	
JIAN JI-8-2	83	
JOINT STRIKE FIGHTER	84	
KFIR C7	85	
KFIR 2000	86	
RAFALE	87	
SU-30	88	
SU-33 (SU-27K)	89	
SU-34	90	
SU-35	91	
SU-37	92	
SU-39	93	
YAK-141 FREESTYLE	94	
F-5 FRESCO	95	
F-7 FISHBED	96	
J-9	97	
RT33	98	
CF-188 HORNET	99	
UNDEFINED	100	
TORNADO F3	101	
SEA HARRIER	102	
F-5 NORTHROP	103	
UNDEFINED	104 THROUGH 254	
FIGHTER GENERAL	255	

DFI NAME
804 AIR SPECIFIC TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
----- BOMBERS/ATTACK -----		
A-4 SKYHAWK	256	
A-6 INTRUDER	257	
A-7 CORSAIR II	258	
A-10 THUNDERBOLT II	259	
A-37 DRAGONFLY	260	
B-1 (ROCKWELL)	261	
B-52 STRATOFORTRESS	262	
AC-130 HERCULES	263	
AV-8 HARRIER	264	
F/A-18 HORNET	265	
FB-111 (GENERAL DYNAMICS)	266	
A-1	267	
TA-28	268	
DISUSED	269	
AC-47	270	
AC-119	271	
AC-124	272	
ALPHA JET	273	
DISUSED	274	THROUGH 276
35XD DRAKEN	277	
J-1 HAWK	278	
J-1 JAESTREB	279	
S-2	280	
AJ37 VIGGEN	281	
HA220 SUPER SAETA	282	
M.B.326 (AERMACCHI)	283	
M.B.339 (AERMACCHI)	284	
SF 260 WARRIER	285	
SK 60 (SAAB)	286	
BAC 167 STRIKEMASTER	287	
TORNADO GR-1 (IDS)	288	
IL-28 BEAGLE	289	
MI-4 BISON	290	
TU-16 BADGER	291	
TU-22 BLINDER	292	
TU-22M BACKFIRE	293	

B - 497

DFI NAME
804 AIR SPECIFIC TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
-----	(CONTINUED)	
BOMBERS/ATTACK		

TU-95 BEAR	294	
TU-142 BEAR	295	
YAK-28 BREWER	296	
SUPER ENTENDARD	297	
TU-160 BLACKJACK	298	
AMX	299	
FRS1 SEA HARRIER	300	
FRS2 SEA HARRIER	301	
FRS51 SEA HARRIER	302	
F-117 NIGHTHAWK	303	
G4 SUPER GALEB	304	
G91Y	305	
HAWK-2000	306	
HAWK-100	307	
HAWK-200	308	
HAWK-50	309	
HAWK-60	310	
IA-58 PUCARA	311	
IAR-93 ORAO	312	
IAR-99 SOIM	313	
JIAN JI-5M	314	
A-5 FANTAN	315	
L59 ALBATROS	316	
B-2 SPIRIT	317	
B-7 HONGZHA	318	
1050E	319	
A3 LEI MING	320	
HARRIER GR4/7	321	
TORNADO GR4	322	
AV-8B HARRIER PLUS	323	
CF-188 HORNET	324	
RAFALE	325	
UNDEFINED	326 THROUGH 510	
BOMBER/ATTACK GENERAL	511	

DFI NAME
804 AIR SPECIFIC TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION

PATROL/RECON/ELECTRONIC/ TANKER/GENERAL		

E-2 HAWKEYE	512	
E-3 SENTRY (AWACS)	513	
E-4 NEACP	514	
EA-3	515	
EA-6 PROWLER	516	
EB-57 (DOUGLAS)	517	
EC-130 HERCULES	518	
EC-135 (BOEING)	519	
EF-4 WILD WEASEL	520	
EF-111 (GENERAL DYNAMICS)	521	
EP-3 ORION	522	
KA-3 (DOUGLAS)	523	
KA-6 (GRUMMAN)	524	
KC-10 EXTENDER	525	
KC-130 HERCULES	526	
KC-135 STRATOTANKER	527	
O-1 BIRD DOG	528	
O-2 (CESSNA)	529	
OV-1 MOHAWK	530	
OV-10 BRONCO	531	
P-2 NEPTUNE	532	
P-3 ORION	533	
RC-130 HERCULES	534	
RC-135 (BOEING)	535	
RF-4 PHANTOM II	536	
RF-5 (NORTHROP)	537	
RF-8 CRUSADER	538	
RF-14 TOMCAT	539	
RF-104 STARFIGHTER	540	
RP-3 ORION	541	
RU-21 UTE	542	
S-2 TRACKER	543	
S-3 VIKING	544	
SR-71 BLACKBIRD	545	
U-2 (LOCKHEED)	546	

B - 499

DFI NAME
804 AIR SPECIFIC TYPE

DATA ITEM (CONTINUED)

PATROL/RECON/ELECTRONIC/
TANKER/GENERAL

BIT CODE
(CONTINUED)

EXPLANATION

U-4 AERO COMMANDER	547	
U-5 H-500 TWIN	548	
U-8 SEMINOLE	549	
U-10 COURIER	550	
UC-12 HURON	551	
U-21 UTE	552	
US-3 VIKING	553	
OA-37 DRAGONFLY	554	
TR-1	555	
WC-130 HERCULES	556	
E-1 TRACER	557	
EB-66	558	
EC-121	559	
RA-3	560	
SEA SCAN	561	
FALCON 20 GUARDIAN	562	
BR 1150 ATL1	563	
RF-35XD DRAGEN	564	
BN-2 MARITIME DEFENDER	565	
DISUSED	566	THROUGH 567
CP-140 AURORA	568	
HS.748 COASTGUARDER	569	
HS.801 NIMROD	570	
DISUSED	571	
MK.3	572	
RJ-1 HAWK	573	
RJ-1 JAESTREB	574	
SS-2	575	
PEACE SENTINEL	576	
KC-97	577	
AU-24	578	
AU-23	579	
U-21	580	
U-17	581	
HU-16	582	
U-9	583	

DFI NAME
804 AIR SPECIFIC TYPE

DATA ITEM (CONTINUED)

PATROL/RECON/ELECTRONIC/
TANKER/GENERAL

BIT CODE
(CONTINUED)

EXPLANATION

U-3	584
RU-21	585
NKC-135	586
RF-101	587
RF-111	588
RB-57	589
RB-66	590
RC-121	591
BE-12 MAIL	592
IL-38 MAY	593
TU-126 MOSS	594
BE-6	595
VC-10 (TANKER)	596
AN-12 CUB-A (ELINT)	597
AN-12 CUB-C (EA)	598
AN-12 CUB-D (EA)	599
IL-20 COOT-A (ELINT)	600
IL-76 MAINSTAY	601
E-8 (J STARS)	602
TORNADO ECR	603
E-6 MERCURY	604
EMB-111	605
MU-2S	606
A40 ALBATROS	607
BE42 ALBATROS	608
CL215 AMPHIBIAN	609
IAI 1125	610
IL22 COOT B	611
J32 LANSEN	612
SH5 HARBIN	613
TIER1	614
TIER2	615
TIER3	616
US1 (SHIN)	617
C-212 CASA	618
CESSNA 550 CITATION II	619

B-501

MIL-STD-6016B
APPENDIX B

DFI NAME
804 AIR SPECIFIC TYPE

DATA ITEM (CONTINUED)	BIT CODE (CONTINUED)	EXPLANATION
----- PATROL/RECON/ELECTRONIC/ TANKER/GENERAL -----		
CESSNA 560 CITATION V	620	
CL 215 CANADAIR	621	
DORNIER 27	622	
F-27 FOKKER	623	
NIMROD MRA4	624	
CP-140A AURORA/ARCTURUS	625	
RC-135 RIVET JOINT	626	
ATL 2	627	
ETENDARD IV P	628	
ALIZE	629	
FALCON 50	630	
MIRAGE IV	631	
MIRAGE 2000	632	
BR 1150 GE ATL ASW	633	
BR 1150 GE ATL SIGINT	634	
C-130 HERCULES TANKER	635	
ASTOR	636	
UNDEFINED	637 THROUGH 761	
TANKER	762	
RECONNAISSANCE (RECON)	763	
ELECTRONIC WARFARE (EW)	764	
ASW	765	
AEW AND C	766	
MISCELLANEOUS GENERAL	767	
----- TRAINER -----		
T-2 BUCKEYE	768	
T-28 TROJAN	769	
T-29 (CONVAIR)	770	
T-34 MENTOR	771	
T-37 TWEET	772	
T-38 TALON	773	
T-39 SABERLINER	774	

DFI NAME
804 AIR SPECIFIC TYPE

DATA ITEM (CONTINUED)

TRAINER

BIT CODE
(CONTINUED)

EXPLANATION

T-41 Mescalero	775
T-42 Conchise	776
T-43 (Boeing)	777
T-44 King Air	778
TA-4 Skyhawk	779
TA-7 Corsair II	780
T-33	781
Alpha Jet	782
B3LA (Saab)	783
C-101 Aviojet	784
G2-A Galeb	785
G2-A Seagull	786
L-29 Delfin	787
L-29 Maya	788
L-39 Albatros	789
L-70 Miltrainer	790
L-450	791
P.55 (Partenavia)	792
T-2 (Mitsubishi)	793
CM 170 Magister	794
M.B.339 (Aermacchi)	795
T-2 (Mitsubishi)	796
CM AU/ Magister	797
M.B.339 (Aermacchi)	798
SF-260 (Siai-Marchetti)	799
SH 37 Vigggen	800
QH-50 Draken	801
SK 37 Vigggen	802
SK 60 (Saab)	803
TB30 Epsilon	804
TF-35XD	805
TJ-1 Hawk	806
TJ-1 Jastrab	807
TS.11 Spark	808
AW1-2 Fan Trainer	809
DISUSED	810
HJT-16 Kiran	811

B-503

MIL-STD-6016B
APPENDIX B

DFI NAME
804 AIR SPECIFIC TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
-----	(CONTINUED)	
TRAINER		

MBB223 FLAMINGO	812	
SU-11 MAIDEN	813	
SU-15	814	
MIG-15 MIDGET	815	
MIG-17	816	
MIG-21 MONGOL	817	
MIG-23	818	
MIG-25	819	
YAK-11 MOOSE	820	
YAK-18 MAX	821	
YAK-28 MAESTRO	822	
TF-104 STARFIGHTER	823	
T-46A	824	
EMB-312 TOUCAN	825	
T-45 GOSHAWK	826	
T-47	827	
AS202	828	
CT114 TUTOR	829	
G91T (FIAT JET 1)	830	
K8 (NAMC)	831	
L70 VINKA	832	
STRIKEMASTER (BAE)	833	
T1 JAYHAWK	834	
T4 (KAWASAKI)	835	
CT-142 DASH 8	836	
B-55 BARON	837	
F-33 BONANZA	838	
839 PILLAN-TAMIZ	839	
CT-133 SILVERSTAR	840	
UNDEFINED	841 THROUGH 1022	
TRAINER GENERAL	1023	

DFI NAME
804 AIR SPECIFIC TYPE

DATA ITEM (CONTINUED)

TRANSPORT/AIRLINER

BIT CODE

EXPLANATION

C-1 (GRUMMAN COD)	1024
C-2 GREYHOUND	1025
C-5 GALAXY	1026
C-7 CARIBOU	1027
C-9 NIGHTINGALE	1028
C-12 HURON	1029
C-123 PROVIDER	1030
C-130 HERCULES	1031
C-135 STRATOLIFTER	1032
C-140 JETSTAR	1033
C-141 STARLIFTER	1034
HC-130 HERCULES	1035
VC-6 KING AIR	1036
VC-9 SKYTRAIN II	1037
VC-11 GULFSTREAM	1038
VC-137 (BOEING)	1039
707 (BOEING)	1040
720 (BOEING)	1041
727 (BOEING)	1042
737 (BOEING)	1043
747 (BOEING)	1044
757 (BOEING)	1045
767 (BOEING)	1046
L-100 HERCULES	1047
L-1011 TRI STAR	1048
DC-8 (DOUGLAS)	1049
DC-9 (DOUGLAS)	1050
DC-10 (DOUGLAS)	1051
C-119	1052
DC-130	1053
HC-97	1054
C-JM	1055
C-54	1056
C-97	1057
C-118	1058
C-119	1059
C-121	1060

B-505

MIL-STD-6016B
APPENDIX B

DFI NAME
804 AIR SPECIFIC TYPE

DATA ITEM (CONTINUED)

TRANSPORT/AIRLINER

BIT CODE
(CONTINUED)

EXPLANATION

C-124	1061
C-131	1062
C-133	1063
VC-47	1064
CV-54	1065
CV-140	1066
ARAVA	1067
CONCORDE	1068
ISLANDER	1069
SKYVAN	1070
TRIDENT	1071
A300 AIRBUS	1072
A310 AIRBUS	1073
C-1 (KAWASKI)	1074
C-160 TRANSALL	1075
C.207 AZOR	1076
C-212 AVIOCAR	1077
F27 FRIENDSHIPS	1078
F28 FELLOWSHIP	1079
G222 SAMA	1080
AW.660 ARGOSY	1081
BAC111 ONE-ELEVEN	1082
DHC-5 BUFFALO	1083
DHC-7 DASH	1084
AN-2 COLT	1085
AN-10 CAT	1086
AN-12 CUB	1087
AN-14 CLOD	1088
AN-22 COCK	1089
AN-24 COKE	1090
AN-26 CURL	1091
AN-28 CASK	1092
AN-30 CLANK	1093
AN-32 CLINE	1094
AN-40 (VERY LARGE TURBO- PROP)	1095
AN-72 COALER	1096

B-506

MIL-STD-6016B
APPENDIX B

DFI NAME
804 AIR SPECIFIC TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
-----	(CONTINUED)	
TRANSPORT/AIRLINER		

IL-12 COACH	1097	
IL-18 COOT	1098	
IL-62 CLASSIC	1099	
IL-76 CANDID	1100	
IL-86 CAMBER	1101	
TU-114 CLEAT	1102	
TU-134 CRUSTY	1103	
TU-144 CHARGER	1104	
TU-154 CARELESS	1105	
YAK-40 CODDLING	1106	
YAK-42 CLOBBER	1107	
TU-104	1108	
YAK-27	1109	
IL-38	1110	
DISUSED	1111	
D0-228 LT (TRANSPORT)	1112	
DISUSED	1113	
AN-74	1114	
AN-124 CONDOR	1115	
A320 AIRBUS	1116	
A321 AIRBUS	1117	
A330 AIRBUS	1118	
A340 AIRBUS	1119	
AN-70	1120	
AN-225 COSSACK	1121	
BAE-125-600	1122	
BAE146	1123	
777 (BOEING)	1124	
C-17 GLOBEMASTER III	1125	
C-20 GULFSTREAM 3/4	1126	
C-21 LEARJET 35	1127	
C-22	1128	
C-23 SHERPA/SHORTS 330	1129	
C-26 METRO 3	1130	
YS 11 (NAMC)	1131	
CL-600 CHALLENGER	1132	
CL-601 CHALLENGER	1133	

B-507

MIL-STD-6016B
APPENDIX B

DFI NAME
804 AIR SPECIFIC TYPE

DATA ITEM (CONTINUED)

TRANSPORT/AIRLINER

BIT CODE
(CONTINUED)

EXPLANATION

CN-235M (AIRTECH)	1134
EMB-120 BRASILLIA ADV	1135
EMB-145 AMAZON	1136
IL-78 MIDAS	1137
MD-11	1138
MD-80	1139
MD-90	1140
PD-808	1141
TU-44	1142
V-22 OSPREY	1143
VC-25	1144
XC-2	1145
1124 (IAI)	1146
1900 (BEECH)	1147
330 (SHORTS)	1148
580 (CONVAIR)	1149
ATR42	1150
B55 BARON	1151
BN2 ISLANDER	1152
C46 COMMANDO	1153
CARAVELL (SUD)	1154
CC109 (CANADAIR)	1155
CHALLENGER (CANADAIR)	1156
DHC2	1157
DHC6 TWIN OTTER	1158
DHC8	1159
EMB110 BANDEIRANTE	1160
EMB121	1161
FALCON 200/FALCON 20	1162
FALCON 50	1163
FALCON 900	1164
FH227 FRIENDSHIP	1165
FOKKER 100	1166
FOKKER 50	1167
FOKKER 60	1168
FOKKER 70	1169
GROB G850	1170

DFI NAME
804 AIR SPECIFIC TYPE

DATA ITEM (CONTINUED)

TRANSPORT/AIRLINER

BIT CODE
(CONTINUED)

EXPLANATION

GULFSTREAM 1	1171
GULFSTREAM 2	1172
JETSTREAM	1173
JETSTREAM 31	1174
KING AIR	1175
L410 TURBOJET	1176
LEARJET 23	1177
LEARJET 24	1178
LEARJET 25 (IMPROVED VER 28)	1179
LEARJET 35/36	1180
LEARJET 55 (IMPROVED VER 28)	1181
LEARJET 60	1182
MERLIN 2	1183
MERLIN 3	1184
MERLIN 4	1185
METRO 3	1186
SAAB 2000	1187
SAAB 340	1188
SABRELINER	1189
U6 BEAVER	1190
VISCOUNT	1191
W3 SOKOL	1192
Y11 (HAMC)	1193
Y12 (HAMC)	1194
Y5	1195
CC-115 BUFFALO	1196
CC-130 HERCULES	1197
CC-150 POLARIS	1198
C-235 CASA	1199
CC-138 TWIN OTTER	1200
DO-228 LM (POLLUTION CONTROL)	1201
UNDEFINED	1202 THROUGH 1277
LIGHT CIVIL	1278

B-509

MIL-STD-6016B
APPENDIX B

DFI NAME
804 AIR SPECIFIC TYPE

DATA ITEM (CONTINUED) ----- TRANSPORT/AIRLINER -----	BIT CODE (CONTINUED)	EXPLANATION
TRANSPORT/AIRLINER GENERAL	1279	
----- HELICOPTERS -----		
AH-1 COBRA	1280	
AH-64 APACHE	1281	
CH-3 (SIKORSKY)	1282	
CH-46 (SEA KNIGHT)	1283	
CH-47 CHINOOK	1284	
CH-53 SEA STALLION	1285	
CH-54 LARKE (SKYCRANE)	1286	
EH-60 QUICK FOX	1287	
HH-1 IROQUOIS	1288	
HH-2 SEA SPRITE	1289	
HH-3 JOLLY GREEN	1290	
HH-52 (SIKORSKY)	1291	
HH-53 (SIKORSKY)	1292	
OH-6 (HUGHES)	1293	
OH-58 KIOWA	1294	
RH-3 SEA KING	1295	
RH-53 (SIKORSKY)	1296	
SH-2 SEA SPRITE	1297	
SH-3 SEA KING	1298	
SH-60 SEA HAWK	1299	
UH-1 IROQUOIS	1300	
UH-2 SEA SPRITE	1301	
UH-12 (HILLER)	1302	
UH-46 (BOEING)	1303	
UH-60 BLACK HAWK	1304	
CH-2U	1305	
HH-43	1306	
A109 (AGUSTA)	1307	
A129 MONGOOSE	1308	
B0-105 (MBB)	1309	

DFI NAME
804 AIR SPECIFIC TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
-----	(CONTINUED)	
HELICOPTERS		

DISUSED	1310	
CH-124 SEA KING	1311	
DISUSED	1312	THROUGH 1314
SA 315 LAMA	1315	
DISUSED	1316	
DISUSED	1317	
SA 321 SUPER FRELON	1318	
SA 330 PUMA	1319	
SA 332 SUPER PUMA	1320	
S 342 GAZELLE	1321	
SA 350 ASTAR	1322	
SA 360 DAUPHIN	1323	
SA 361 DAUPHIN	1324	
WG-13 LYNX	1325	
WG-34 (WESTLAND)	1326	
KA-18 HOG	1327	
KA-20 HARP	1328	
KA-25 HORMONE	1329	
KA-26 HOODLUM	1330	
MI-1 HARE	1331	
MI-2 HOPLITE	1332	
MI-4 HOUND	1333	
MI-6 HOOK	1334	
MI-8 HIP	1335	
MI-10 HARKE	1336	
MI-12 HOMER	1337	
MI-14 HAZE	1338	
MI-24 HIND	1339	
MI-26 HALO	1340	
CH-53E SUPER STALLION	1341	
MH-53E SEA DRAGON	1342	
HH-60 NIGHT HAWK	1343	
HH-65A DOLPHIN	1344	
KA-27 HELIX-A (ASW)	1345	
KA-32 HELIX	1346	
MI-17 HIP-H	1347	
MI-28 HAVOC	1348	

B-511

MIL-STD-6016B
APPENDIX B

DFI NAME
804 AIR SPECIFIC TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
-----	(CONTINUED)	
HELICOPTERS		

ECUREUIL/FENNEL/ESQILO	1349	
KA-29 HELIX-B	1350	
KA-50 HOKUM	1351	
204 BELL	1352	
205 BELL	1353	
206 BELL	1354	
214 BELL	1355	
280 ENSTROM	1356	
300 SCHWEIZER	1357	
406 COMBAT SCOUT	1358	
A 109 HIRUNDO	1359	
A 129 MANGUSTA	1360	
AH 6 CAYUSE	1361	
ALOUETTE 2	1362	
ALOUETTE 3	1363	
AS 350 ECUREUIL	1364	
AS 532 COUGAR	1365	
AS 550 FENNEC	1366	
AS 555 FENNEC	1367	
AS 565 PANTHER	1368	
CH 34 WESTLAND	1369	
EH 101	1370	
HAS 1 WASP	1371	
KA-28 HELIX A	1372	
MD 500 DEFENDER	1373	
MI 22	1374	
MI 25	1375	
MI 35	1376	
MI 9	1377	
SA 341 GAZELLE	1378	
SA 342 GAZELLE	1379	
SA 365 DAUPHIN 2	1380	
TS11 ISKRA	1381	
WESSEX	1382	
Z9 (HARBIN)	1383	
CH-146 GRIFFON	1384	
SEA KING AEW (SKW)	1385	

B-512

MIL-STD-6016B
APPENDIX B

DFI NAME
804 AIR SPECIFIC TYPE

DATA ITEM (CONTINUED)

HELICOPTERS

BIT CODE
(CONTINUED)

EXPLANATION

EH 101 MERLIN	1386
AB-212 AUGUSTA BELL	1387
BO-105 BOLKOW	1388
CH-47 CHINOOK	1389
HUGHES 500	1390
HUGHES 3000	1391
SH-3D SIKORSKY	1392
SH-70L SIKORSKY	1393
CH-113 LABRADOR	1394
NH 90 (C2)	1395
NH 90 (RECCE)	1396
NH 90 (EW/SEAD)	1397
NH 90 (TRANSPORT)	1398
SEA LYNX MK88A	1399
SEA KING MK41 (KWS)	1400
TIGER (HAP)	1401
NH 90 (NAVY)	1402
TIGER (HAC)	1403
SA 341 GAZELLE CANON	1404
AS 532 COUGAR HORIZON	1405
AW-520 SAR CORMORANT	1406
UNDEFINED	1407 THROUGH 1534
HELICOPTER GENERAL	1535

AIR-AIR MISSILES

AIM-4A FALCON	1536
AIM-7 SPARROW	1537
AIM-9 SIDEWINDER	1538
AIM-54 PHOENIX	1539
AIM-2A GENIE	1540
AIM-120 AMRAAM	1541
ASLAM	1542
R.530	1543
R.550 MAGIC	1544

DFI NAME
804 AIR SPECIFIC TYPE

DATA ITEM (CONTINUED)	BIT CODE (CONTINUED)	EXPLANATION
----- AIR-AIR MISSILES -----		
S.530 SUPER 530	1545	
ASPIDE	1546	
DISUSED	1547	
SHAFRIR	1548	
SKY FLASH	1549	
DISUSED	1550	
AA-2 ATOLL	1551	
AA-3 ANAB	1552	
AA-5 ASH	1553	
AA-6 ACRID	1554	
AA-7 APEX	1555	
AA-8 APHID	1556	
AAM	1557	
AA-9 AMOS	1558	
AA-XP-1/2	1559	
AQM-34	1560	
AQM-91	1561	
BGM-34 FIREBEE/MQM34	1562	
YQM-94	1563	
YQM-98	1564	
AIM-132 ASRAAM	1565	
MICA	1566	
PL-2A	1567	
PL-5B	1568	
PL-7	1569	
PL-9	1570	
PYTHON 3	1571	
PYTHON 4	1572	
AA-10 ALAMO	1573	
AA-11 ARCHER	1574	
AA-12 ADDER	1575	
AA-1 ALKALI	1576	
AAM-1	1577	
UNDEFINED	1578 THROUGH 1790	
AIR-TO-AIR MISSILE GENERAL	1791	

B-514

MIL-STD-6016B
APPENDIX B

DFI NAME
804 AIR SPECIFIC TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
----- AIR-GROUND/GROUND- GROUND MISSILES -----		
AGM-45 SHRIKE	1792	
AGM-65 MAVERICK	1793	
AGM-69 SRAM	1794	
AGM-78 STANDARD ARM	1795	
AGM-84 HARPOON	1796	
AGM-86 ALCM	1797	
AGM-88 HARM	1798	
AGM-109 TOMAHAWK	1799	
AM 39 EXOCET	1800	
AGM-119 PENGUIN	1801	
AS 11 KILTER	1802	
AS 12 KEGLER	1803	
AS 15 KENT	1804	
AS 30	1805	
DISUSED	1806	
RB 05	1807	
RB 08	1808	
ADVANCED ASM	1809	
AS-1 KENNEL	1810	
AS-2 KIPPER	1811	
AS-3 KANGAROO	1812	
AS-4 KITCHEN	1813	
AS-5 KELT	1814	
AS-6 KINGFISH	1815	
AS-7 KERRY	1816	
DISUSED	1817	
AS-10 KAREN	1818	
AS-9 KYLE	1819	
AS 34 KORMORAN	1820	
ASM GABRIEL	1821	
ASM SEA SKUA	1822	
ASM SEA EAGLE	1823	
ASMP	1824	
AT-2 SWATTER	1825	
AT-3 SAGGER	1826	
AT-6 SPIRAL	1827	

B-515

MIL-STD-6016B
APPENDIX B

DFI NAME
804 AIR SPECIFIC TYPE

DATA ITEM (CONTINUED)

AIR-GROUND/GROUND-
GROUND MISSILES

BIT CODE
(CONTINUED)

EXPLANATION

C-601	1828
C-611	1829
C-801	1830
C-802	1831
CSS-2	1832
CSS-3	1833
CSS-N-3	1834
CSS-X-4	1835
FL-2 SILKWORM	1836
FL-7	1837
HY-2	1838
HY-3	1839
M-9/11	1840
WS-1	1841
AS-13 KINGBOLT	1842
AS-14 KEDGE	1843
AS-16 KICKBACK	1844
AS-17 KRYPTON	1845
AS-18 KAZOO	1846
AT-4 SPIGOT	1847
AT-5 SPANDREL	1848
AT-7 SAXHORN	1849
AT-10 STABBER	1850
AT-11 SNIPER	1851
AT-12	1852
AT-13	1853
AT-14	1854
FROG-7	1855
SS-1 SCUD	1856
SS-11 SEGO	1857
SS-13 SAVAGE	1858
SS-18 SATAN	1859
SS-19 STILETTO	1860
SS-24 SCALPEL	1861
SS-25 SICKLE	1862
SS-N-2 STYX	1863

DFI NAME
804 AIR SPECIFIC TYPE

DATA ITEM (CONTINUED)

AIR-GROUND/GROUND-
GROUND MISSILES

BIT CODE
(CONTINUED)

EXPLANATION

SS-N-3 SHADDOCK	1864
SS-N-6 SERB	1865
SS-N-7 STARBRIGHT	1866
SS-N-8 SAWFLY	1867
SS-N-9 SIREN	1868
SS-N-12 SANDBOX	1869
SS-N-18 STINGRAY	1870
SS-N-19 SHIPWRECK	1871
SS-N-20 STURGEON	1872
SS-N-21 SAMPSON	1873
SS-N-22 SUNBURN	1874
SS-N-23 SKIFF	1875
SS-N-26	1876
AGNI	1877
PRITHVI	1878
TOW	1879
AGM-114 HELLFIRE	1880
MLRS	1881
HOT	1882
MILAN	1883
TRIGAT	1884
OTOMAT	1885
RBS-15M	1886
ARMAT	1887
ALARM	1888
AGM-12 BULLPUP	1889
AGM-62A WALLEYE	1890
AGM-123A SKIPPER II	1891
APACHE (ASM)	1892
AS 8	1893
AT-1 SWATTER	1894
CAS1	1895
KH-41 MOSKIT	1896
MARTIN PESCADOR	1897
MAS1 CARCARA	1898
RB 04E	1899

B-517

MIL-STD-6016B
APPENDIX B

DFI NAME
804 AIR SPECIFIC TYPE

DATA ITEM (CONTINUED)	BIT CODE (CONTINUED)	EXPLANATION
----- AIR-GROUND/GROUND- GROUND MISSILES -----		
STAR	1900	
SEA INDIGO	1901	
MM 38	1902	
MM 40	1903	
SM 39	1904	
AS 34 KORMORAN II	1905	
UNDEFINED	1906 THROUGH 2046	
AIR-GROUND MISSILE GENERAL	2047	
----- SURFACE TO AIR MISSILES -----		
FIM-92 STINGER	2048	
NIM-23 HAWK	2049	
MIM-42 REDEYE	2050	
MIM-72 CHAPARRAL	2051	
MIM-104 PATRIOT	2052	
RIM-2 TERRIER	2053	
RIM-7 SEA SPARROW	2054	
RIM-8 TALOS	2055	
RIM-24 TARTAR	2056	
RIM-66 STANDARD MISSILE	2057	
RIM-67 STANDARD MISSILE	2058	
BLOWPIPE	2059	
DISUSED	2060 THROUGH 2061	
SEA DART	2062	
DISUSED	2063	
SEA WOLF	2064	
S 440 CROTALE EDIR	2065	
RAPIER	2066	
RBS-70 (SLM)	2067	
DISUSED	2068	
SAM ROLAND	2069	
SA-2 GUIDELINE	2070	

B-518

MIL-STD-6016B
APPENDIX B

DFI NAME
804 AIR SPECIFIC TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
-----	(CONTINUED)	
SURFACE TO AIR MISSILES		

SA-3 GOA	2071	
SA-4 GANEF	2072	
SA-N-3 GOBLET	2073	
SA-5 GAMMON	2074	
SA-N-4 GECKO	2075	
SA-6 GAINFUL	2076	
SA-N-6 GRUMBLE	2077	
SA-7 GRAIL	2078	
SA-8 GECKO	2079	
SA-9 GASKIN	2080	
SA-10 GRUMBLE	2081	
SA-11 GADFLY	2082	
SA-12	2083	
SA-13 GOPHER	2084	
MISTRAL	2085	
SA-N-7 GADFLY	2086	
SA-N-8 GREMLIN	2087	
SA-14 GREMLIN	2088	
SA-16 GIMLET	2089	
SA-X-17	2090	
SA-N-5 GRAIL	2091	
SA-N-11 GRISOM	2092	
SA-12A GLADIATOR	2093	
SA-12B GIANT	2094	
SA-14 GREMLIN	2095	
SA-15 GAUNTLET	2096	
SA-17 GRIZZLY	2097	
SA-N-12 GRIZZLY	2098	
SA-18 GROUSE	2099	
SA-19 GRISOM	2100	
RIM-116 RAM	2101	
ADATS	2102	
JAVELIN	2103	
STARBURST	2104	
STARSTREAK	2105	
ASPID	2106	
I-HAWK	2107	

B-519

MIL-STD-6016B
APPENDIX B

DFI NAME
804 AIR SPECIFIC TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
-----	(CONTINUED)	
SURFACE TO AIR MISSILES		

ROLAND II	2108	
SM-2 BLOCK II	2109	
SM-2 BLOCK III	2110	
SM-2 BLOCK IIIA	2111	
SM-2 BLOCK IIIB	2112	
SM-2 BLOCK IV	2113	
SM-2 BLOCK IVA	2114	
SM-3 LEAP	2115	
AKASH	2116	
ANZA	2117	
ANZA II	2118	
CSA-1	2119	
CSA-2	2120	
CSA-4	2121	
CSA-5	2122	
FM-80	2123	
HN-5	2124	
NK-7	2125	
NK-16	2126	
PANTZYR	2127	
RAPIER 2000/JERNAS	2128	
RBS-90	2129	
SAKR	2130	
SAVA	2131	
SHANINE	2132	
SKYGUARD ASPIDE	2133	
SPADA	2134	
TAM SAM	2135	
TIGERCAT	2136	
VANGUARD	2137	
SA-N-1 GOA	2138	
SA-N-9 GAUNTLET	2139	
SA-N-10	2140	
ALBATROS/ASPIDE	2141	
SM-1	2142	
VT1 CROTALE	2143	
MASURCA	2144	

B-520

MIL-STD-6016B
APPENDIX B

DFI NAME
804 AIR SPECIFIC TYPE

DATA ITEM (CONTINUED)

SURFACE TO AIR MISSILES

ASTER 15
ASTER 30
UNDEFINED
RESET TO NO STATEMENT
SURFACE-TO-AIR MISSILE
GENERAL

BIT CODE
(CONTINUED)

2145
2146
2147 THROUGH 4093
4094
4095

EXPLANATION

DFI NAME DEFINITION
806 FUEL FUNCTION USED IN CONJUNCTION WITH THE FUEL FIELD TO INDICATE EITHER
BURNABLE FUEL OR OFF-LOAD FUEL.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 FUEL FUNCTION [1 BIT] (FL FCT)	USED IN CONJUNCTION WITH THE FUEL FIELD TO INDICATE EITHER BURNABLE OR OFF-LOAD FUEL.	J13.2I J13.3C1

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
BURNABLE FUEL	0	
OFF-LOAD FUEL	1	INDICATES THAT THE FUEL SPECIFIED IN THE FUEL FIELD IS AVAILABLE FOR TRANSFER.

APPENDIX B

DFI	NAME	DEFINITION
808	SURFACE (MARITIME) SPECIFIC TYPE	THE SPECIFIC TYPE OF POINT OR TRACK ON THE SURFACE (MARITIME).

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
001 SURFACE (MARITIME) SPECIFIC TYPE [12 BIT]	THE SPECIFIC TYPE OF POINT OR TRACK WITH AN ENVIRONMENT/CATEGORY OF SURFACE (MARITIME).	J3.3I J7.0C1 J13.3I J15.0C1	J3.7C5 J12.0C2 J14.0C5	J6.0E0 J12.6E0 J14.2C5
002 SURFACE (MARITIME) AMBIGUOUS TYPE 1 [12 BIT]	IDENTIFIES THE TARGET SPECIFIC TYPE AS DETERMINED BY AN ONBOARD CORRELATION PROCESS IF THERE ARE NO AMBIGUITIES. IDENTIFIES THE MOST PROBABLE TARGET SPECIFIC TYPE IN AN ONBOARD CORRELATION PROCESS DETERMINED THAT THE SPECIFIC TYPE IS AMBIGUOUS. INFORMATION IN THIS FIELD SHALL BE DERIVED ONLY FROM ONBOARD SOURCES AS OPPOSED TO DATA LINK SOURCES.	J12.6C4	J12.7C2	
003 SURFACE (MARITIME) AMBIGUOUS TYPE 2 [12 BIT]	IDENTIFIES THE SECOND MOST PROBABLE TARGET SPECIFIC TYPE IF AN ONBOARD CORRELATION PROCESS DETERMINES THAT THE SPECIFIC TYPE IS AMBIGUOUS. INFORMATION IN THIS FIELD SHALL BE DERIVED ONLY FROM ONBOARD SOURCES AS OPPOSED TO DATA LINK SOURCES.	J12.6C4	J12.7C2	

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001, 002, AND 003 -----		
NO STATEMENT	0	
CV GENERAL	1	
CLEMENCEAU	2	
ENTERPRISE	3	
FORRESTAL	4	
JOHN F KENNEDY	5	
KITTY HAWK	6	

DFI NAME
808 SURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)

BIT CODE

EXPLANATION

MIDWAY	7	
NIMITZ	8	
CHARLES DE GAULLE	9	
UNDEFINED	10 THROUGH 21	
CVS GENERAL	22	
DEDALO	23	
MINAS GERAIS	24	
VIKRANT	25	
VEINTICINCO DE MAYO	26	
VIRAAT	27	
UNDEFINED	28 THROUGH 35	
CVH GENERAL	36	
GIUSEPPE GARIBALDI	37	
INVINCIBLE	38	
JEANNE D'ARC	39	
KIEV	40	
PRINCIPE DE ASTURIAS	41	
UNDEFINED	42	
KIEV (MODIFIED)	43	
UNDEFINED	44 THROUGH 52	
BB GENERAL	53	
IOWA	54	
UNDEFINED	55 THROUGH 64	
CC GENERAL	65	
SVERDLOV (MODIFIED)	66	
UNDEFINED	67 THROUGH 76	
CG GENERAL	77	
ANDREA DORIA	78	
BAINBRIDGE	79	
BELKNAP	80	
CALIFORNIA	81	
UNDEFINED	82	
KARA	83	
KIROV	84	
KRESTA I	85	
KRESTA II	86	
KYNDA	87	
LEAHY	88	
LONG BEACH	89	
SLAVA	90	
TICONDEROGA	91	

DFI NAME
808 SURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
TRUXTUN	92	
VIRGINIA	93	
VITTORIO VENETO	94	
UNDEFINED	95 THROUGH 118	
CH GENERAL	119	
MOSKVA	120	
UNDEFINED	121 THROUGH 130	
CA GENERAL	131	
UNDEFINED	132	
SVERDLOV	133	
UNDEFINED	134 THROUGH 143	
DD GENERAL	144	
AKIZUKI	145	
ALLEN M SUMNER	146	
ALLEN M SUMNER FRAM II	147	
ALMIRANTE	148	
AMATSUKAZE	149	
ANIMOSO	150	
ANSHAN	151	
ARLEIGH BURKE	152	
ASAGARI	153	
UNDEFINED	154	
AUDACE	155	
AYANAMI	156	
DISUSED	157	
CARPENTER FRAM I	158	
CHARLES F ADAMS (MOD)	159	
CHARLES F ADAMS	160	
COONTZ	161	
DISUSED	162 THROUGH 163	
UNDEFINED	164	
FLETCHER	165	
FORREST SHERMAN (MOD) & HULL	166	
FRIESLAND	167	
GEARING FRAM I	168	
GEARING FRAM II	169	
UNDEFINED	170	
DISUSED	171	
HARUNA	172	
HATAKAZE	173	

DFI NAME
808 SURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
HATSUYUKI	174	
IMPAVIDO	175	
KANIN	176	
KASHIN (MODIFIED)	177	
KASHIN	178	
KASHIN II	179	
KIDD	180	
UNDEFINED	181	
KILDIN (MODIFIED)	182	
KOTLIN	183	
KOTLIN (MODIFIED)	184	
LUDA (TYPE 051)	185	
MEKO 360	186	
MINEGUMO	187	
PROJECT 15	188	
ROBERT H SMITH	189	
ROGER D LAURIA	190	
SAM KOTLIN	191	
SHIRANE	192	
SKORY	193	
SOVREMENYY	194	
SPRUANCE	195	
SUFFREN	196	
TACHIKAZE	197	
TAKATSUKI	198	
TYPE 42	199	
DISUSED	200	
DISUSED	201	
TYPE F-70 (AAW)	202	
TYPE F-70 (ASW)	203	
TYPE F-67	204	
UNDEFINED	205 THROUGH 206	
TYPE T-53 (MODIFIED-ASW)	207	
UNDEFINED	208	
UDALOY	209	
YAMAGUMO	210	
Z	211	
IROQUOIS	212	
UNDEFINED	213 THROUGH 276	
DE GENERAL	277	
UNDEFINED	278	

DFI NAME
808 SURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
CASTLE	279	
UNDEFINED	280 THROUGH 295	
FF GENERAL	296	
ALMIRANTE CLEMENTE	297	
ALMIRANTE PEREIRA DA SILVA	298	
ALPINO	299	
DISUSED	300 THROUGH 301	
BALEARES	302	
BAPTISTA DE ANDRADE	303	
UNDEFINED	304	
BERK	305	
BLACK SWAN	306	
BROADSWORD (TYPE 22)	307	
BRONSTEIN	308	
BROOKE	309	
CANNON	310	
CHARLES LAWRENCE	311	
CHENGDU	312	
CHIKUGO	313	
COMANDANTE JOAO BELO	314	
UNDEFINED	315	
CROSLEY	316	
DEALEY	317	
DESCUBIERTA	318	
DUKE (TYPE 23)	319	
DURANGO	320	
EDSALL	321	
GARCIA	322	
GLOVER	323	
GODAVARI	324	
GRISHA I	325	
GRISHA II	326	
GRISHA III	327	
UNDEFINED	328	
GRISHA V	329	
UNDEFINED	330	
HVIDBJORNEN	331	
ISHKARI	332	
ISUZU	333	
JACOB VAN HEEMSKERCK	334	

DFI NAME
808 SURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
JIANGDONG (TYPE 053J)	335	
JIANGHU (TYPE 053H)	336	
JIANGNAN	337	
JOAO COUTINHO	338	
KAREL DOORMAN	339	
KNOX	340	
DISUSED	341	
KONI	342	
KORTENAER	343	
KRIVAK I	344	
KRIVAK II	345	
KRIVAK III	346	
LA FAYETTE	347	
DISUSED	348	
LEOPARD	349	
LUPO	350	
M	351	
DISUSED	352	
MAESTRALE	353	
MEKO 140 TYPE	354	
MEKO 200 TYPE	355	
MIRKA I	356	
MIRKA II	357	
NIELS JUEL	358	
NITEROI	359	
OLIVER HAZARD PERRY	360	
OSLO	361	
PEDER SKRAM	362	
PETYA I (MODIFIED)	363	
PETYA I	364	
PETYA II (MODIFIED)	365	
PETYA II	366	
PETYA III	367	
UNDEFINED	368	
DISUSED	369	
RIGA	370	
RIVER	371	
BRANDENBURG (TYPE 123)	372	
RUDDEROW	373	
SACHSEN (TYPE 124)	374	
SAVAGE	375	

DFI NAME
808 SURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
DISUSED	376	
TROMP	377	
TYPE A 69	378	
TYPE F-2000S	379	
UNDEFINED	380 THROUGH 381	
YUBARI	382	
BREMEN (TYPE 122)	383	
CLAUDE JONES	384	
FFG 7	385	
HALIFAX	386	
NAJIN	387	
PRESIDENT	388	
SANTA MARIA	389	
VOSPER MK 5	390	
VOSPERTHORNYCROFT MK 7	391	
WIELINGEN	392	
FLOREAL	393	
COMMANDANT BORY	394	
UNDEFINED	395 THROUGH 478	
FS GENERAL	479	
ALBATROS	480	
AUK CLASS	481	
DE CRISTOFARO	482	
DISUSED	483	
MINERVA	484	
NANUCHKA I	485	
NANUCHKA II	486	
NANUCHKA III	487	
DISUSED	488	
PF-103	489	
SAAR 5	490	
SLEIPNER	491	
TARANTUL I	492	
TARANTUL II	493	
DISUSED	494	
WADI	495	
UNDEFINED	496 THROUGH 517	
LL GENERAL	518	
UNDEFINED	519 THROUGH 528	
LCC GENERAL	529	
BLUE RIDGE	530	

DFI NAME
808 SURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)

BIT CODE

EXPLANATION

CAVEZZALE	531	
UNDEFINED	532 THROUGH 540	
LKA GENERAL	541	
CHARLESTON	542	
UNDEFINED	543 THROUGH 552	
LFS GENERAL	553	
UNDEFINED	554 THROUGH 563	
LHA GENERAL	564	
TARAWA	565	
UNDEFINED	566 THROUGH 575	
LHD GENERAL	576	
WASP	577	
UNDEFINED	578 THROUGH 587	
LPA GENERAL	588	
UNDEFINED	589 THROUGH 598	
LPD GENERAL	599	
AUSTIN	600	
FEARLESS	601	
IVAN ROGOV	602	
UNDEFINED	603	
RALEIGH	604	
SAN GIORGIO	605	
UNDEFINED	606 THROUGH 615	
LPH GENERAL	616	
IWO JIMA	617	
UNDEFINED	618 THROUGH 627	
LSD GENERAL	628	
ANCHORAGE	629	
ASHLAND	630	
CABILDO	631	
OURAGAN	632	
FOUDRE	633	
THOMASTON	634	
WHIDBEY ISLAND	635	
UNDEFINED	636 THROUGH 646	
LSL GENERAL	647	
SIR GERAINT	648	
UNDEFINED	649 THROUGH 657	
LSM GENERAL	658	
ASHDOD	659	
BATRAL	660	

DFI NAME
808 SURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
CAKABEY	661	
EDIC I	662	
EDIC II	663	
LSM-1	664	
MP-4	665	
POLNOCHNY	666	
POLOCHNY A	667	
POLOCHNY B	668	
POLOCHNY C	669	
POLOCHNY D	670	
YUDAO	671	
YULIMG	672	
BOUGAINVILLE	673	
UNDEFINED	674 THROUGH 687	
LST GENERAL	688	
ALLIGATOR	689	
ATSUMI	690	
UNDEFINED	691	
BROOKE MARINE 93M	692	
CAKABEY NL-122	693	
CNIM PS 700	694	
DE SOTO COUNTY	695	
DISUSED	696	
HENGAM	697	
LST 1-510	698	
LST 511-1152	699	
MIURA	700	
NEWPORT	701	
ROPUCHA	702	
SARUCABEY	703	
CNGF	704	
OCEAN	705	
ALBION	706	
TERREBONNE PARISH	707	
TOBRUK	708	
UNDEFINED	709	
YUKAN	710	
UNDEFINED	711 THROUGH 730	
LSV GENERAL	731	
UNDEFINED	732 THROUGH 741	
LC GENERAL	742	

DFI NAME
808 SURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)

BIT CODE

EXPLANATION

UNDEFINED	743 THROUGH 751	
LCM GENERAL	752	
CTM 1	753	
HUNGNAM	754	
LCM 1057/1058	755	
LCM 6	756	
LCM 8	757	
T-4	758	
TSAPLYA	759	
LCM (TYPE 521)	760	
UNDEFINED	761 THROUGH 772	
LCP GENERAL	773	
DISUSED	774	
LCM 1031	775	
LCM 1035/1036	776	
LCM 1055/1056	777	
NAMPO	778	
UNDEFINED	779 THROUGH 788	
LCPL GENERAL	789	
UNDEFINED	790 THROUGH 799	
LWC GENERAL	800	
UNDEFINED	801 THROUGH 810	
LCU GENERAL	811	
BALIKPAPAN	812	
BOMBARDA	813	
BRAILA	814	
LCU (TYPE 520)	815	
DISUSED	816	
DISUSED	817	
DISUSED	818	
DSM-501	819	
HANCHON	820	
HANTAE	821	
KISHON	822	
KVALSUND	823	
LCT MK 5	824	
LCT MK 6	825	
LCU 501	826	
MFP D-3	827	
MZ	828	
REINOYSUND	829	

APPENDIX B

DFI NAME
808 SURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)

BIT CODE

EXPLANATION

SMB-1	830	
TU 57-M	831	
US LCU 1466	832	
VYDRA	833	
YURA	834	
UNDEFINED	835 THROUGH 866	
LCVP GENERAL	867	
UNDEFINED	868 THROUGH 877	
LCAC GENERAL	878	
AIST	879	
GUS	880	
LEBED	881	
UTENOK	882	
WELLINGTON BH-7 MK 4	883	
WELLINGTON BH-7 MK 5	884	
WINCHESTER (SR.N6)	885	
UNDEFINED	886 THROUGH 896	
MM GENERAL	897	
ALESHA	898	
ALVSBORG	899	
BORGEN	900	
CARLSKRONA	901	
COSAR	902	
FALSTER	903	
FURUSUND (MUL-20)	904	
LANGELAND	905	
LINDORMEN	906	
LSM-1 (MODIFIED)	907	
MUL-11	908	
MUL-12	909	
DISUSED	910	
SMITH	911	
US YMP	912	
VIDAR	913	
UNDEFINED	914 THROUGH 935	
MCS GENERAL	936	
UNDEFINED	937 THROUGH 946	
MCJ GENERAL	947	
UNDEFINED	948 THROUGH 957	
MCD GENERAL	958	
KINGSTON	959	

DFI NAME
808 SURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
MUEHLHAUSEN MCD (TYPE 742A)	960	
UNDEFINED	961 THROUGH 968	
MCM GENERAL	969	
UNDEFINED	970 THROUGH 979	
MH GENERAL	980	
UNDEFINED	981 THROUGH 990	
MHO GENERAL	991	
UNDEFINED	992 THROUGH 1001	
MHC GENERAL	1002	
ADJUTANT (MODIFIED)	1003	
AGGRESSIVE	1004	
CIRCE	1005	
WEIDEN MHC (TYPE 332)	1006	
KOBLENZ MHC (TYPE 331B)	1007	
UNDEFINED	1006 THROUGH 1007	
HAM	1008	
HUNT	1009	
LANDSORT	1010	
LERICI	1011	
MSC 50	1012	
MSO 218	1013	
MSO 503	1014	
SAUDA	1015	
SIRIUS	1016	
DISUSED	1017	
TRIPARTITE	1018	
VANYA I	1019	
SANDOWN (SRMH)	1020	
UNDEFINED	1021 THROUGH 1029	
MHSC GENERAL	1030	
MARS	1031	
UNDEFINED	1032 THROUGH 1043	
MHI GENERAL	1044	
BAY	1045	
UNDEFINED	1046 THROUGH 1054	
MHA GENERAL	1055	
UNDEFINED	1056 THROUGH 1065	
ML GENERAL	1066	
UNDEFINED	1067 THROUGH 1076	
MLC GENERAL	1077	

DFI NAME
808 SURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)

BIT CODE

EXPLANATION

CURLEW	1078	
UNDEFINED	1079 THROUGH 1088	
MLI GENERAL	1089	
UNDEFINED	1090 THROUGH 1099	
MLO GENERAL	1100	
UNDEFINED	1101 THROUGH 1110	
MLR GENERAL	1111	
UNDEFINED	1112 THROUGH 1121	
MLA GENERAL	1122	
UNDEFINED	1123 THROUGH 1132	
MLS GENERAL	1133	
UNDEFINED	1134 THROUGH 1143	
MS GENERAL	1144	
UNDEFINED	1145 THROUGH 1154	
MSF GENERAL	1155	
EX-ERIMO	1156	
K-8	1157	
KROGULEC	1158	
M-40	1159	
MSO-421	1160	
NATYA I	1161	
NATYA II	1162	
RIVER	1163	
T-43	1164	
YURKA	1165	
UNDEFINED	1166 THROUGH 1180	
MSO GENERAL	1181	
ACME	1182	
AGGRESSIVE	1183	
UNDEFINED	1184 THROUGH 1193	
MSC GENERAL	1194	
136 FT	1195	
ADJUTANT	1196	
ARKOE	1197	
BAY	1198	
DOKKUM	1199	
HATSUSHIMA	1200	
HAYASE	1201	
DISUSED	1202	
KOUZJ	1203	
LENIWKA	1204	

DFI NAME
808 SURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
HAMELN MSC (TYPE 343)	1205	
MSC 268	1206	
MSC 292	1207	
MSC 294	1208	
NOTEC	1209	
SASHA	1210	
SAUDA	1211	
DISUSED	1212	
DISUSED	1213	
SONYA	1214	
T-301	1215	
T-43	1216	
TAKAMI	1217	
DISUSED	1218	
VANYA	1219	
VANYA I	1220	
VANYA II	1221	
WUSONG	1222	
ZHENYA	1223	
UNDEFINED	1224 THROUGH 1263	
MSI GENERAL	1264	
DISUSED	1265	
AUX MINESWEEPER NO 1	1266	
CAPE	1267	
FRAUENLOB (TYPE 394)	1268	
HAM	1269	
HERSTAL	1270	
KIISKI	1271	
KUHA	1272	
M-111	1273	
M-15	1274	
M-31	1275	
M-43/47	1276	
PIPA-A	1277	
WOCHANG	1278	
YEVGENYA	1279	
YUKTO	1280	
UNDEFINED	1281 THROUGH 1302	
MSR GENERAL	1303	
UNDEFINED	1304 THROUGH 1313	
MSB GENERAL	1314	

APPENDIX B

DFI NAME
808 SURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
K-8	1315	
N-300	1316	
NESTIN	1317	
N0. 7	1318	
OLYA	1319	
PO-2	1320	
TR-40	1321	
VD-141	1322	
VULCAIN	1323	
STYX	1324	
PLUTON	1325	
ACHERON	1326	
UNDEFINED	1327 THROUGH 1334	
MSA GENERAL	1335	
UNDEFINED	1336 THROUGH 1345	
MSD GENERAL	1346	
HFG-1 (TROIKA)	1347	
ILYUSHA	1348	
UNDEFINED	1349 THROUGH 1358	
MCSD GENERAL	1359	
UNDEFINED	1360 THROUGH 1369	
MSS GENERAL	1370	
ANDRYUSHA	1371	
BALTIKA	1372	
POLNOCNY	1373	
UNDEFINED	1374 THROUGH 1383	
MSH GENERAL	1384	
UNDEFINED	1385 THROUGH 1394	
MSO GENERAL	1395	
BERLAIMONT (MODIFIED)	1396	
UNDEFINED	1397 THROUGH 1405	
MSHC GENERAL	1406	
HUNT	1407	
TRIPARTITE	1408	
WILTON	1409	
UNDEFINED	1410 THROUGH 1419	
PP GENERAL	1420	
AB 25	1421	
UNDEFINED	1422	
BALDER	1423	
CASTLE	1424	

DFI NAME
808 SURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
ISLAND	1425	
KRONSHADT	1426	
PC-1638	1427	
UNDEFINED	1428 THROUGH 1438	
PG GENERAL	1439	
BESKYTTEVREN	1440	
BIHORO	1441	
ERIMO	1442	
DISUSED	1443	
HVIDBJOERNEN	1444	
IZU	1445	
KOJIMA	1446	
UNDEFINED	1447	
NOJIMA	1448	
PAUK	1449	
PEACOCK	1450	
POTI	1451	
SAVAGE	1452	
SHIRETOKO	1453	
SOYA	1454	
TACOMA	1455	
LEOPARD (TYPE 148)	1456	
BAMBU	1457	
CASSIOPEA	1458	
UNDEFINED	1459 THROUGH 1480	
PGS GENERAL	1481	
UNDEFINED	1482 THROUGH 1491	
PGB GENERAL	1492	
UNDEFINED	1493 THROUGH 1502	
PGF GENERAL	1503	
ALBATROS (TYPE 143)	1504	
ASHEVILLE	1505	
BARNEGAT	1506	
CHONGJU	1507	
GEPAED (TYPE 143A)	1508	
HOUKU	1509	
IVANSUSANIN	1510	
KAMAN	1511	
KARTAL	1512	
KOMAR	1513	
LA COMBATTANTE II	1514	

DFI NAME
808 SURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
LA COMBATTANTE III	1515	
LURSSSEN FPB 57 TYPE	1516	
OKHTENSKIY	1517	
OSA I	1518	
OSA II	1519	
P-4	1520	
PURGA	1521	
SAAR 2	1522	
SAAR 3	1523	
SAAR 4	1524	
SAAR 5	1525	
SARIWON	1526	
SNOEGG	1527	
SOHUNG	1528	
SOJU	1529	
SORUM	1530	
STORM	1531	
T	1532	
T-43	1533	
T-58	1534	
VOSPER 100-FT	1535	
VOSPER BRAVE	1536	
WILLEMOES	1537	
UNDEFINED	1538 THROUGH 1583	
PC GENERAL	1584	
ADMIRABLE	1585	
AGDLEK	1586	
AKIZUKI	1587	
ATTACK	1588	
BAY	1589	
DISUSED	1590	
BROOKE MARINE 108-FT	1591	
CACINE	1592	
CHONGJU	1593	
DAPHNE	1594	
GDANSK	1595	
HAIKOU	1596	
HAINAN	1597	
HANOE	1598	
K-48	1599	
KRALJEVICA	1600	

DFI NAME
808 SURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
KRONSHADT	1601	
LAKE	1602	
MAGAEN	1603	
MATSUNAMI	1604	
MIZUTORI	1605	
MURAKUMO	1606	
OBLUZE	1607	
PGM 71	1608	
SDB MK II	1609	
SDB MK III	1610	
SEAFORTH	1611	
SHANGHAI	1612	
SHANGHAI II	1613	
SHANGHAI II (MODIFIED)	1614	
SHIKINAMI	1615	
SO-1	1616	
SOMAN	1617	
STENKA	1618	
T-58	1619	
TAECHONG	1620	
UK FORD	1621	
UMIGIRI	1622	
US 110-FT	1623	
US 173-FT	1624	
UNDEFINED	1625	
ARCHER	1626	
ATTACKER	1627	
23M PC (MANLY)	1628	
UNDEFINED	1629	THROUGH 1681
PCF GENERAL	1682	
BABOCHKA	1683	
MURAVEY	1684	
POTI	1685	
SO-1 (MODIFIED)	1686	
UNDEFINED	1687	THROUGH 1696
PCE GENERAL	1697	
UNDEFINED	1698	THROUGH 1707
PB GENERAL	1708	
AKAGI	1709	
AKIZUKI	1710	
ALBATROZ	1711	

DFI NAME
808 SURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
ATTACK P-90	1712	
BARSO	1713	
BAY	1714	
BIZAN	1715	
BROOKE MARINE 37.5M	1716	
CHONGJIN	1717	
DABUR	1718	
DALARO	1719	
DE L'ESTEREL	1720	
DILOS	1721	
DOM ALEIXO	1722	
DISUSED	1723	
FREMANTLE	1724	
GOULANDRIS	1725	
GUANABACOA	1726	
HAMAGIRI	1727	
HAMELIN 37M	1728	
HIDAKA	1729	
HUANGPU	1730	
INTERCEPTOR MK II	1731	
KIMJIN 67-FT	1732	
MATSUNAMI	1733	
MURAKUMO	1734	
OIRASE	1735	
P 400	1736	
P-6	1737	
PANAGOPOULOS	1738	
PATRA	1739	
PBR MK II	1740	
PBR MK III	1741	
PGM 71	1742	
PO-2	1743	
POLISH K-8	1744	
POLUCHAT I	1745	
SHANTOU	1746	
SHIKINAMI	1747	
SINHUNG 72-FT	1748	
SKANOER	1749	
SOYA/TSUGARU	1750	
SPEAR	1751	
STEWART 85-FT	1752	

APPENDIX B

DFI NAME
808 SURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
SWATOW	1753	
SWIFT	1754	
TAISHAN	1755	
TESHIO	1756	
TRACKER II	1757	
US 110-FT	1758	
US ARMY 2001 65-FT	1759	
USCG 83-FT	1760	
VEDETTE 28 92-FT	1761	
VIKRAM	1762	
VOSPER 70-FT	1763	
YAMAYURI	1764	
ZHUK	1765	
SNOEGG	1766	
MARS	1767	
TRIDENT	1768	
UNDEFINED	1769	THROUGH 1842
PBF GENERAL	1843	
CHAO (CHODO)	1844	
DE L'ESTEREL	1845	
GIRNE	1846	
HAUK	1847	
HUGIN	1848	
SLEPEN	1849	
UNDEFINED	1850	
SPICA II	1851	
MARS	1852	
UNDEFINED	1853	THROUGH 1863
PBS GENERAL	1864	
UNDEFINED	1865	THROUGH 1874
PBR GENERAL	1875	
LEIE	1876	
PIYAVKA	1877	
SHMEL	1878	
VOSH	1879	
YATUSH	1880	
YAZ	1881	
UNDEFINED	1882	THROUGH 1891
PT GENERAL	1892	
AN JU	1893	
EPITROP	1894	

DFI NAME
808 SURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)

BIT CODE

EXPLANATION

HIGGINS 78-FT	1895	
HUCHUAN PTH-	1896	
HUZHOU	1897	
IWON	1898	
DISUSED	1899	
KU SONG	1900	
NO. 11	1901	
P-4	1902	
P-6	1903	
PILICA	1904	
SHERSHEN	1905	
SIN HUNG	1906	
SIN NAM	1907	
SINPO	1908	
SOLOVEN	1909	
SPICA	1910	
TJELD	1911	
WISLA	1912	
DISUSED	1913	
SHANGDONG	1914	
TURYA	1915	
UNDEFINED	1916 THROUGH 2047	
PHM GENERAL	2048	
MATKA	2049	
PEGASUS	2050	
SARANCHA	2051	
SHIMRIT	2052	
SPARVIERO	2053	
UNDEFINED	2054 THROUGH 2063	
BM GENERAL	2064	
UNDEFINED	2065 THROUGH 2074	
BMR GENERAL	2075	
UNDEFINED	2076 THROUGH 2085	
SWCL GENERAL	2086	
UNDEFINED	2087 THROUGH 2096	
AA GENERAL	2097	
UNDEFINED	2098 THROUGH 2107	
AG GENERAL	2108	
ADOLF	2109	
AKIZUKI	2110	
ANGARA	2111	

DFI NAME
808 SURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)

BIT CODE

EXPLANATION

ARGO	2112	
AYANAMI	2113	
DISUSED	2114	THROUGH 2115
CHAMOIS	2116	
CHIHAYA	2117	
DALDYN	2118	
DISUSED	2119	
DINGHAI	2120	
ENDURANCE	2121	
EXPLORER	2122	
DISUSED	2123	
FRIPONNE	2124	
GALEB	2125	
UNDEFINED	2126	
HAM	2127	
DISUSED	2128	
HAYABUSA	2129	
DISUSED	2130	
ISLES	2131	
KEYLA	2132	
KURIHAMA	2133	
L 'ARCHEONAUTE	2134	
L 'ATHOS	2135	
UNDEFINED	2136	
LENTRA	2137	
LIANYUN	2138	
LSIL	2139	
MIZUTORI	2140	
MP-2	2141	
MP-8	2142	
MURASAME	2143	
NEFTEGAZ	2144	
N0. 81	2145	
NORGE	2146	
OHRE	2147	
ONEGA	2148	
DISUSED	2149	
POSEIDON	2150	
PS-10	2151	
RARI	2152	
RHIN	2153	

DFI NAME
808 SURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
SABAC	2154	
SHAHSAVAR	2155	
ST. LYKODIS	2156	
STALWART	2157	
T-43	2158	
TAPATAI	2159	
TAPPE	2160	
THULE	2161	
TOMBA	2162	
TSUGARU	2163	
UMITAKA	2164	
US 184 FT. PCE	2165	
US 72 FT. HMDL	2166	
VANGUARD	2167	
VIS	2168	
VYTEGRALES	2169	
WHISKEY	2170	
WILHELM PULLWER (TYPE 741)	2171	
PELIKAAN	2172	
RANCE	2173	
MERCURE	2174	
STERNE	2175	
ALBATROS	2176	
PHENIX	2177	
UNDEFINED	2178	THROUGH 2256
ARV GENERAL	2257	
ARGUS	2258	
ENGADINE	2259	
RELIANT	2260	
UNDEFINED	2261	THROUGH 2270
AVT GENERAL	2271	
LEXINGTON	2272	
UNDEFINED	2273	THROUGH 2282
AE GENERAL	2283	
EVROS	2284	
DISUSED	2285	
KILAUEA	2286	
NITRO	2287	
REGENT	2288	
SURIBACHI	2289	

DFI NAME
808 SURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)
WESTERWALD (TYPE 760)
UNDEFINED
AEL GENERAL
UNDEFINED
AET GENERAL
UNDEFINED
AETL GENERAL
UNDEFINED
AGF GENERAL
ABDIEL
CORONADO
GODETIA
LA SALLE
DISUSED
ZINNIA
ELBE (TYPE 404)
UNDEFINED
ACM GENERAL
UNDEFINED
APB GENERAL
MICHELANGELO
UNDEFINED
ABU GENERAL
CARDENAS
FINIK I
KARPF II
SKB 64
YANTAI
YANNAN
YANGUAN
TIANEE
LA PRUDENTE
UNDEFINED
ABUD GENERAL
UNDEFINED
ANL GENERAL
UNDEFINED
ARC GENERAL
EMBA I
EMBA II
KALAR

BIT CODE
2290
2291 THROUGH 2301
2302
2303 THROUGH 2312
2313
2314 THROUGH 2323
2324
2325 THROUGH 2334
2335
2336
2337
2338
2339
2340
2341
2342
2343 THROUGH 2351
2352
2353 THROUGH 2362
2363
2364
2365 THROUGH 2374
2375
2376
2377
2378
2379
2380
2381
2382
2383
2384
2385 THROUGH 2395
2396
2397 THROUGH 2406
2407
2408 THROUGH 2417
2418
2419
2420
2421

EXPLANATION

DFI NAME
808 SURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
KLASMA	2422	
MP-2	2423	
NEPTUNE	2424	
TELNOVSK (MODIFIED)	2425	
YOUDIAN	2426	
ZEUS	2427	
UNDEFINED	2428	THROUGH 2440
AK GENERAL	2441	
2ND LT JOHN P BOBO	2442	
ALCHIBA	2443	
AMGUEMA	2444	
ANDIZHAN	2445	
ANDONG	2446	
ANDROMEDA (CONVERTED)	2447	
DISUSED	2448	
BARRICADE	2449	
BITTERBUSH	2450	
C3-S-33A TYPE (CONVERTED)	2451	
C4-S-66A TYPE	2452	
C4-S-69B TYPE	2453	
C4-S-A3 TYPE	2454	
C5-S-75A TYPE	2455	
CHULYM	2456	
CPL LOUIS J HAUGE JR	2457	
DINGHAI	2458	
DONBA SS	2459	
FS DESIGN 330	2460	
GALATI	2461	
HONGQI	2462	
ISLES	2463	
KANARYA	2464	
KOLOMNA	2465	
LENINGRADSKY KOMSOMOLETS	2466	
LSIL	2467	
NEON ANTONOV	2468	
NORWALK	2469	
PT-61	2470	
SGT MATEJ KOCAK	2471	
THROSK	2472	
TREE	2473	

DFI NAME
808 SURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
YANHANG	2474	
YUNYY PARTIZAN	2475	
UNDEFINED	2476 THROUGH 2521	
AKL GENERAL	2522	
ELTANIN	2523	
KEYLA	2524	
UNDEFINED	2525	
LENTRA	2526	
UNDEFINED	2527	
MP 4	2528	
MP 6	2529	
MUNA	2530	
SEKSTAN	2531	
TELNOVSK	2532	
WISTING	2533	
GORGONA	2534	
UNDEFINED	2535 THROUGH 2549	
AKR GENERAL	2550	
ALGOL (SL 7)	2551	
CALLAGHAN	2552	
COMET	2553	
METEOR	2554	
DISUSED	2555	
MAINE (CONVERTED)	2556	
UNDEFINED	2557 THROUGH 2566	
AFS GENERAL	2567	
FORT	2568	
UNDEFINED	2569	
MARS	2570	
RESOURCE	2571	
UNDEFINED	2572 THROUGH 2580	
AOE GENERAL	2581	
SACRAMENTO	2582	
SAGAMI	2583	
UNDEFINED	2584 THROUGH 2593	
AD GENERAL	2594	
YELLOWSTONE	2595	
SAMUEL GOMPERS	2596	
DIXIE	2597	
STALWART	2598	
UNDEFINED	2599 THROUGH 2608	

DFI NAME
808 SURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)

BIT CODE

EXPLANATION

AWW GENERAL	2609	
UNDEFINED	2610 THROUGH 2619	
AH GENERAL	2620	
HAVEN	2621	
OB	2622	
DISUSED	2623	
UNDEFINED	2624 THROUGH 2632	
AGB GENERAL	2633	
DOBRYNYA NIKITICH	2634	
HANSE	2635	
IVANSUSANIN	2636	
SHIRASE	2637	
YANHA	2638	
UNDEFINED	2639 THROUGH 2648	
AGBL GENERAL	2649	
EISVOGEL (TYPE 721)	2650	
DISUSED	2651	
UNDEFINED	2652 THROUGH 2661	
AGI GENERAL	2662	
ALPINIST	2663	
ARMINZA	2664	
UNDEFINED	2665	
BALZAM	2666	
BOLOGOE	2667	
DISUSED	2668	
HAM	2669	
DISUSED	2670	
DISUSED	2671	
LENTRA	2672	
MAYAK	2673	
MIRNYY	2674	
MOMA	2675	
NIKOLAY ZUBOV	2676	
OKEAN	2677	
DISUSED	2678	
PAMIR	2679	
PRIMORYE	2680	
ALSTER (TYPE 423)	2681	
UNDEFINED	2682 THROUGH 2705	
ALS GENERAL	2706	
UNDEFINED	2707 THROUGH 2716	

DFI NAME
808 SURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
AEM GENERAL	2717	
AMGA	2718	
ANDIZHAN (MODIFIED)	2719	
LAMA	2720	
MALINA	2721	
MELITOPOL	2722	
MP 6	2723	
UNDEFINED	2724 THROUGH 2733	
AGM GENERAL	2734	
AGM-24	2735	
GEN HOYT S VANDENBERG	2736	
OBSERVATION ISLAND	2737	
RANGE SENTINEL	2738	
(HASKELL TYPE)		
REDSTONE	2739	
UNDEFINED	2740 THROUGH 2749	
AGOR GENERAL	2750	
ABKHAZIYA	2751	
AKADEMIK KRYLOV	2752	
ARAD	2753	
BALIKPAPAN	2754	
BELGICA	2755	
DISUSED	2756	
COOK	2757	
D'ENTRECASTEAUX	2758	
DOBRYNYA NIKITICH	2759	
DONG MING	2760	
ELTANIN	2761	
ENDEAVOR	2762	
FRANCESCO NULLO	2763	
DISUSED	2764	
GRIGORE ANTIPA	2765	
GYRE	2766	
HAYES	2767	
HECLA	2768	
MELVILLE	2769	
MSC 60	2770	
NAUTILUS	2771	
NEVELSKOY	2772	
NIKOLAY ZUBOV	2773	
PITHEAS	2774	

DFI NAME
808 SURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
POLYUS	2775	
QUEST	2776	
ROBERT D CONRAD	2777	
T-43	2778	
TRITON	2779	
TUI	2780	
TYDEMAN	2781	
XIANG YANG HONG	2782	
YANLUN	2783	
YUG	2784	
ZENOBE GRAMME	2785	
MAYAK	2786	
UNDEFINED	2787	THROUGH 2823
AGOB GENERAL	2824	
POLARSTERN	2825	
UNDEFINED	2826	THROUGH 2835
AGOS GENERAL	2836	
UNDEFINED	2837	THROUGH 2845
AO GENERAL	2846	
UNDEFINED	2847	
AKAR	2848	
ALBAY BURBAK	2849	
ALTAY	2850	
UNDEFINED	2851	
BASKUNCHAK	2852	
BAYLEAF	2853	
BINBASI GURGAN	2854	
DISUSED	2855	
CIMARRON	2856	
CIMARRON (JUMBOISED)	2857	
DORA	2858	
HAMANA	2859	
DISUSED	2860	
DISUSED	2861	
HENRY J KAISER	2862	
IRTYSH	2863	
KALININGRADNEFT	2864	
KHOBI	2865	
KONDA	2866	
METTAWEE	2867	
MISPILLION (JUMBOISED)	2868	

APPENDIX B

DFI NAME
808 SURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
MOSKIT	2869	
NEOSHO	2870	
NERCHA	2871	
NORWEGIAN BOW	2872	
OLEKMA	2873	
PATAPSCO	2874	
PEVEK	2875	
UNDEFINED	2876	
SOFIYA	2877	
SPESSART (TYPE 704A)	2878	
TASKIZAK	2879	
USEDOM	2880	
WALCHENSEE (TYPE 703)	2881	
WAVE	2882	
DISUSED	2883	
YUZBASI TOLUNAY	2884	
BRAMBLELEAF	2885	
UNDEFINED	2886	THROUGH 2936
AOT GENERAL	2937	
AMERICAN EXPLORER	2938	
AOTL	2939	
EBANOL	2940	
FULIN	2941	
FUZHOU	2942	
GUANZGHOU	2943	
LEIZHOU	2944	
MAUMEE	2945	
METTAWEE	2946	
MISSION	2947	
POTOMOC	2948	
SEALIFT	2949	
SUAMICO	2950	
T 5 TYPE	2951	
TM2	2952	
PORT VENDRES	2953	
UNDEFINED	2954	THROUGH 2973
AOTL GENERAL	2974	
DISUSED	2975	
KHOBI	2976	
UNDEFINED	2977	THROUGH 2986
AOR GENERAL	2987	

DFI NAME
808 SURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
BANDAR ABBAS	2988	
BEREZINA	2989	
BORIS CHILIKIN	2990	
CAPITAN OLA PANTOJA	2991	
DEEPAK	2992	
DUBNA	2993	
DURANCE	2994	
FUQING	2995	
KAZBEK	2996	
KHARG	2997	
MEERSBURG (TYPE 701C)	2998	
MESAR	2999	
OLWEN	3000	
POOLSTER	3001	
POLYARNIK	3002	
PROTECTEUR	3003	
PROVIDER	3004	
ROVER	3005	
SAO GABRIEL	3006	
STROMBOLI	3007	
TIDE (IMPROVED)	3008	
UDA	3009	
WICHITA	3010	
FORT VICTORIA	3011	
BERLIN (TYPE 702C)	3012	
UNDEFINED	3013 THROUGH 3042	
AORL GENERAL	3043	
LEIZHOU	3044	
UNDEFINED	3045 THROUGH 3054	
AOL GENERAL	3055	
PUNARUU	3056	
UNDEFINED	3057 THROUGH 3065	
AGP GENERAL	3066	
GRAHAM COUNTY	3067	
NORGE	3068	
DISUSED	3069	
MERCUUR	3070	
UNDEFINED	3071 THROUGH 3079	
AP GENERAL	3080	
MIKHAIL KALININ	3081	
PANDORA	3082	

DFI NAME
808 SURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)

QIONGSHA
UNDEFINED
AGR GENERAL
UNDEFINED
AOSR GENERAL
UNDEFINED
AR GENERAL
ACHELOUS
AJAX
AMPHION
AMUR
ARL I
DALIANG
DILIGENCE
DIXIE
JULES VERNE
OSKOL
RHIN
STALWART
UNDEFINED
ARL GENERAL
ARCHELOUS
UNDEFINED
AGE GENERAL
BELGICA
BERRY
UNDEFINED
COMMANDANT RIVIERE
DESN
DOBRYNYA NIKITICH
EF 3
HENRI POINCARE
ILE D'OLERON
IVANSUSANIN
KOLOMNA
LENTRA
MARSHAL NEDELIN
MOMA
MP-8
MUNA
NARVIK

BIT CODE

3083
3084 THROUGH 3093
3094
3095 THROUGH 3104
3105
3106 THROUGH 3115
3116
3117
3118
3119
3120
3121
3122
3123
3124
3125
3126
3127
3128
3129 THROUGH 3145
3146
3147
3148 THROUGH 3157
3158
3159
3160
3161
3162
3163
3164
3165
3166
3167
3168
3169
3170
3171
3172
3173
3174
3175

EXPLANATION

DFI NAME
808 SURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
OS-3	3176	
POINT LOMA	3177	
POTOK	3178	
QUARTO	3179	
SASHA	3180	
SIBIR	3181	
SO-1	3182	
T-43	3183	
TRITON	3184	
DISUSED	3185	
YAL 01	3186	
YANXI	3187	
ROSSETTI	3188	
DENTI	3189	
MONGE	3190	
UNDEFINED	3191 THROUGH 3227	
ARS GENERAL	3228	
BOLSTER	3229	
DISUSED	3230	
INGUL	3231	
KATUN I	3232	
KATUN II	3233	
KOWAN	3234	
LSIL 351	3235	
MIKHAIL RUDNITSKY	3236	
OREL	3237	
PAMIR	3238	
PIAST	3239	
PROTEO	3240	
PS-11	3241	
SAFEGUARD	3242	
SILVA	3243	
SPASILAC	3244	
DISUSED	3245	
US 149 FT	3246	
YANDING	3247	
UNDEFINED	3248 THROUGH 3273	
ARSD GENERAL	3274	
UNDEFINED	3275 THROUGH 3284	
ASVR GENERAL	3285	
UNDEFINED	3286 THROUGH 3295	

DFI NAME
808 SURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
AOS GENERAL	3296	
ALATNA	3297	
LUZA	3298	
URAL	3299	
VALA	3300	
TONTI	3301	
UNDEFINED	3302 THROUGH 3311	
AF GENERAL	3312	
CROITOR	3313	
DANLIN	3314	
MAYAK	3315	
RIEGEL	3316	
UNDEFINED	3317 THROUGH 3326	
AKS GENERAL	3327	
UNDEFINED	3328 THROUGH 3337	
AKSL GENERAL	3338	
UNDEFINED	3339 THROUGH 3348	
AFL GENERAL	3349	
UNDEFINED	3350 THROUGH 3359	
ASR GENERAL	3360	
ANTEO	3361	
CHANTICLEER	3362	
DAHIANG	3363	
DALANG	3364	
ELBRUS	3365	
FEHMARN (TYPE 720B)	3366	
FUSHIMI	3367	
GALATI	3368	
HUDONG	3369	
KURTARAN	3370	
NEPA	3371	
PIGEON	3372	
PRUT	3373	
ROSLAVL	3374	
SPASILAC	3375	
VALDAY	3376	
ZHONGHUA	3377	
UNDEFINED	3378 THROUGH 3401	
AS GENERAL	3402	
ACHELOUS	3403	
AEGIR	3404	

DFI NAME
808 SURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
DISUSED	3405	
ATREK	3406	
CHIYODA	3407	
DADONG	3408	
DAZHOU	3409	
DIVER	3410	
DNEPR	3411	
DNEPR (MODIFIED)	3412	
DON	3413	
EMORY S LAND	3414	
FULTON	3415	
HUNLEY	3416	
L Y SPEAR	3417	
PROTEUS	3418	
DISUSED	3419	
SIMON LAKE	3420	
UGRA	3421	
UNDEFINED	3422 THROUGH 3447	
ASL GENERAL	3448	
UNDEFINED	3449 THROUGH 3458	
AGS GENERAL	3459	
AGS 39 CLASS	3460	
AKASHI	3461	
ALMEIDA CARVALHO	3462	
AMMIRAGLIO MAGNAGHI	3463	
ANDRIJA MOHOROVICIC	3464	
AUK	3465	
BIYA	3466	
BOLOGUE	3467	
UNDEFINED	3468	
BUYSKES	3469	
C4-S-A1 TYPE (CONVERTED)	3470	
CHAUVENET	3471	
COOK	3472	
DING HAI	3473	
FINIK	3474	
FS DESIGN 330	3475	
FUTAMI	3476	
HAMASHIO	3477	
HEIYO	3478	
KAIBOKAN I	3479	

DFI NAME
808 SURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)

BIT CODE

EXPLANATION

KAIYO	3480	
KAMENKA	3481	
DISUSED	3482	
UNDEFINED	3483	
L'ESPERANCE	3484	
UNDEFINED	3485	
LENTRA	3486	
LSIL	3487	
MEIYO	3488	
MELITOPOL	3489	
MOMA	3490	
MONOWAI	3491	
MORESBY	3492	
MP-8	3493	
MSC-294 (BLUEBIRD)	3494	
NYRYAT I	3495	
NYRYAT II	3496	
SAMARA	3497	
SHOYO	3498	
SILAS BENT	3499	
STERNE	3500	
SUMA	3501	
T-43	3502	
TAKUYO	3503	
TELNOVSK	3504	
TELNOVSK (MODIFIED)	3505	
TENYO	3506	
VICTORY (CONVERTED)	3507	
WILKES	3508	
YANLAI	3509	
YANXU	3510	
MIRTO	3511	
MARS	3512	
LAPEROUSE	3513	
UNDEFINED	3514 THROUGH 3579	
AGSA GENERAL	3580	
UNDEFINED	3581 THROUGH 3590	
AGSC GENERAL	3591	
EXPLORER	3592	
FLINDERS	3593	
TAINO	3594	

DFI NAME
808 SURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)

BULLDOG
ROEBUCK
UNDEFINED
AX GENERAL
ARIS
DISUSED
JADRAN
JERVIS BAY
JOSE MARTI
MP-8
SMOLNY
UGRA
VIETNAM HEROICO
WODNIK
UNDEFINED
AXL GENERAL
UNDEFINED
LEOPARD
MAYAK
UNDEFINED
AXS GENERAL
AMERIGO VESPUCCI
CAROLY
CARSARO II
GORCH FOCK (TYPE 441A)
MIRCEA
PALINURO
SAGRES
STELLA POLARE
UNDEFINED
AT GENERAL
UNDEFINED
ATA GENERAL
ABNAKI
APACHE
ARMY 254
ATAK
ATLANTE
AZUMA
BELIER
UNDEFINED

BIT CODE

3595
3596
3597 THROUGH 3604
3605
3606
3607
3608
3609
3610
3611
3612
3613
3614
3615
3616 THROUGH 3630
3631
3632
3633
3634
3635 THROUGH 3642
3643
3644
3645
3646
3647
3648
3649
3650
3651
3652 THROUGH 3659
3660
3661 THROUGH 3665
3666
3667
3668
3669
3670
3671
3672
3673
3674

EXPLANATION

DFI NAME
808 SURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
GAJ	3675	
GNIEWKO	3676	
GORYN	3677	
GROMOVOY	3678	
KUDRET	3679	
MAITO	3680	
MB-31	3681	
MB-65	3682	
MOTYL	3683	
OKHTENSKIY	3684	
ONCU	3685	
POWHATAN	3686	
ROSLAVL	3687	
ROYSTERER	3688	
SAINT	3689	
SCHULTZ XAVIER	3690	
SORUM	3691	
TENACE	3692	
TUZHONG	3693	
TYPHOON	3694	
WANGER00GE (TYPE 722B)	3695	
ZENIT	3696	
MAITO	3697	
ARMEN	3698	
UNDEFINED	3699	THROUGH 3737
ATR GENERAL	3738	
TENACE	3739	
UNDEFINED	3740	THROUGH 3748
ATS GENERAL	3749	
EDENTON	3750	
OKHTENSKY	3751	
LANGE00G (TYPE 754)	3752	
ARGUS	3753	
UNDEFINED	3754	THROUGH 3762
AWT GENERAL	3763	
UNDEFINED	3764	
BASENTO	3765	
FUZHOU (MODIFIED)	3766	
KANGAN	3767	
LEIZHOU (MODIFIED)	3768	
LSIL	3769	

DFI NAME
808 SURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
MANYCH	3770	
MINCIO	3771	
PIAVE	3772	
TEVERE	3773	
ULUBAT	3774	
VODA	3775	
YW-83	3776	
Z	3777	
UNDEFINED	3778	THROUGH 3797
SERVICE CRAFT GENERAL	3798	
BARGE, GENERAL	3799	
YO GENERAL	3800	
YOG GENERAL	3801	
YHT GENERAL	3802	
YRNS GENERAL	3803	
YOS GENERAL	3804	
YPK GENERAL	3805	
YRR GENERAL	3806	
YRB GENERAL	3807	
YRST GENERAL	3808	
YOM GENERAL	3809	
YOSS GENERAL	3810	
YW GENERAL	3811	
UNDEFINED	3812	THROUGH 3827
YD GENERAL	3828	
YM GENERAL	3829	
YFD GENERAL	3830	
YFP GENERAL	3831	
YGT GENERAL	3832	
YR GENERAL	3833	
UNDEFINED	3834	THROUGH 3840
YFD GENERAL	3841	
YFDB GENERAL	3842	
YFDM GENERAL	3843	
YFDL GENERAL	3844	
UNDEFINED	3845	THROUGH 3850
YRD GENERAL	3851	
YRDB GENERAL	3852	
YRDM GENERAL	3853	
YRDL GENERAL	3854	
UNDEFINED	3855	THROUGH 3861

DFI NAME
808 SURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
LIGHTER GENERAL	3862	
YE GENERAL	3863	
YF GENERAL	3864	
YFC GENERAL	3865	
YFR GENERAL	3866	
YC GENERAL	3867	
YFT GENERAL	3868	
UNDEFINED	3869 THROUGH 3878	
YT GENERAL	3879	
YTB GENERAL	3880	
YTM GENERAL	3881	
YTL GENERAL	3882	
UNDEFINED	3883 THROUGH 3892	
YAGF GENERAL	3893	
YAG GENERAL	3894	
YV GENERAL	3895	
YNG GENERAL	3896	
YP GENERAL	3897	
YFU GENERAL	3898	
YAM GENERAL	3899	
YNC GENERAL	3900	
YLC GENERAL	3901	
YVS GENERAL	3902	
YRG GENERAL	3903	
YAGT GENERAL	3904	
YPT GENERAL	3905	
YRC GENERAL	3906	
YDT GENERAL	3907	
YNT GENERAL	3908	
YH GENERAL	3909	
YFB GENERAL	3910	
YTR GENERAL	3911	
YFL GENERAL	3912	
YAC GENERAL	3913	
YSR GENERAL	3914	
YSG GENERAL	3915	
YDG GENERAL	3916	
KHABAROV	3917	
UNDEFINED	3918 THROUGH 3936	
TM GENERAL	3937	
TMD GENERAL	3938	

DFI NAME
808 SURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
TMB GENERAL	3939	
TMK GENERAL	3940	
TMF GENERAL	3941	
TMC GENERAL	3942	
TMCS GENERAL	3943	
TMWW GENERAL	3944	
TMA GENERAL	3945	
TMH GENERAL	3946	
TMGB GENERAL	3947	
TMI GENERAL	3948	
TML GENERAL	3949	
TMOT GENERAL	3950	
TMM GENERAL	3951	
TMP GENERAL	3952	
TMFR GENERAL	3953	
TMR GENERAL	3954	
TMOR GENERAL	3955	
TMOL GENERAL	3956	
TME GENERAL	3957	
TMGS GENERAL	3958	
TMLS GENERAL	3959	
TMS GENERAL	3960	
TMOS GENERAL	3961	
TMO GENERAL	3962	
TMX GENERAL	3963	
TMWT GENERAL	3964	
UNDEFINED	3965 THROUGH 3989	
TMT GENERAL	3990	
TMTR GENERAL	3991	
TMTS GENERAL	3992	
UNDEFINED	3993 THROUGH 4002	
TU GENERAL	4003	
TUF GENERAL	4004	
TUB GENERAL	4005	
TUI GENERAL	4006	
TUR GENERAL	4007	
TUT GENERAL	4008	
TUS GENERAL	4009	
TUC GENERAL	4010	
TUW GENERAL	4011	
UNDEFINED	4012 THROUGH 4023	

DFI NAME
808 SURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
TJ GENERAL	4024	
TJF GENERAL	4025	
TJC GENERAL	4026	
TJCS GENERAL	4027	
TJGB GENERAL	4028	
UNDEFINED	4029 THROUGH 4038	
TS GENERAL	4039	
TSG GENERAL	4040	
TSR GENERAL	4041	
UNDEFINED	4042 THROUGH 4052	
MPS GENERAL	4053	
UNDEFINED	4054 THROUGH 4069	
SURFACE SPECIFIC TYPE 1-25	4070 THROUGH 4094	
RESET TO NO STATEMENT	4095	

APPENDIX B

DFI	NAME	DEFINITION
809	SUBSURFACE (MARITIME) SPECIFIC TYPE	THE SPECIFIC TYPE OF POINT OR TRACK UNDER THE SURFACE (MARITIME).

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
001 SUBSURFACE (MARITIME) SPECIFIC TYPE [12 BIT]	THE SPECIFIC TYPE OF POINT OR TRACK WITH AN ENVIRONMENT/CATEGORY OF SUBSURFACE (MARITIME).	J3.4C2 J7.0C1 J13.4I J15.0C1	J3.7C5 J12.0C2 J14.0C5	J6.0E0 J12.6E0 J14.2C5
002 SUBSURFACE (MARITIME) AMBIGUOUS TYPE 1 [12 BIT]	IDENTIFIES THE TARGET SPECIFIC TYPE AS DETERMINED BY AN ONBOARD CORRELATION PROCESS IF THERE ARE NO AMBIGUITIES. IDENTIFIES THE MOST PROBABLE TARGET SPECIFIC TYPE IF AN ONBOARD CORRELATION PROCESS DETERMINED THAT THE SPECIFIC TYPE IS AMBIGUOUS. INFORMATION IN THIS FIELD SHALL BE DERIVED ONLY FROM ONBOARD SOURCES AS OPPOSED TO DATA LINK SOURCES.	J12.6C4	J12.7C2	
003 SUBSURFACE (MARITIME) AMBIGUOUS TYPE 2 [12 BIT]	IDENTIFIES THE SECOND MOST PROBABLE TARGET SPECIFIC TYPE IF AN ONBOARD CORRELATION PROCESS DETERMINES THAT THE SPECIFIC TYPE IS AMBIGUOUS. INFORMATION IN THIS FIELD SHALL BE DERIVED ONLY FROM ONBOARD SOURCES AS OPPOSED TO DATA LINK SOURCES.	J12.6C4	J12.7C2	

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001, 002, AND 003 -----		
NO STATEMENT	0	
SS GENERAL	1	
ABTAO SS	2	
DISUSED	3	
DISUSED	4	
UNDEFINED	5	
DISUSED	6	

DFI NAME
809 SUBSURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
GUPPY II SS	7	
GUPPY IIA SS	8	
GUPPY III SS	9	
HAI LUNG SS	10	
DISUSED	11	
SAURO (TYPE 1081) SS	12	
SAURO (IMPROVED) SS	13	
TANG SS	14	
TYPE SNA 72 SS	15	
UZUSHIO SS	16	
WALRUS SS	17	
YUUSHIO SS	18	
UNDEFINED	19	
DISUSED	20	
PELOSI SS	21	
UNDEFINED	22 THROUGH 360	
SSB GENERAL	361	
GOLF SSB	362	
GOLF II SSB	363	
GOLF III SSB	364	
GOLF V SSB	365	
UNDEFINED	366 THROUGH 440	
SSBN GENERAL	441	
BENJAMIN FRANKLIN SSBN	442	
DELTA I SSBN	443	
DELTA II SSBN	444	
DELTA III SSBN	445	
DELTA IV SSBN	446	
HOTEL III SSBN	447	
DISUSED	448	
L'INFLEXIBLE SSBN	449	
DISUSED	450	
UNDEFINED	451	
OHIO SSBN	452	
RESOLUTION SSBN	453	
TYPHOON SSBN	454	
VANGUARD SSBN	455	
YANKEE SSBN	456	
YANKEE I SSBN	457	
YANKEE II SSBN	458	
XIA SSBN	459	

DFI NAME
809 SUBSURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
LE TERRIBLE SSBN	460	
UNDEFINED	461 THROUGH 720	
SSN GENERAL	721	
AKULA SSN	722	
ALFA SSN	723	
AMATHEPT SSN	724	
CHARLIE/VICTOR SSGN/SSN	725	
CHURCHILL SSN	726	
ECHO/NOVEMBER SSGN/SSN	727	
DISUSED	728	
DISUSED	729	
HAN SSN	730	
HOTEL SSN	731	
LOS ANGELES SSN	732	
MIKE SSN	733	
NARWHAL SSN	734	
DISUSED	735	
RUBIS SSN	736	
SEAWOLF SSN	737	
SIERRA SSN	738	
DISUSED	739	
DISUSED	740	
STURGEON SSN	741	
SWIFTSURE SSN	742	
TRAFALGAR SSN	743	
DISUSED	744	
VICTOR I SSN	745	
VICTOR II SSN	746	
VICTOR III SSN	747	
YANKEE SSN	748	
VIRGINIA SSN	749	
UNDEFINED	750 THROUGH 1200	
SSG GENERAL	1201	
JULIETT SSG	1202	
UNDEFINED	1203 THROUGH 1245	
SSGN GENERAL	1246	
CHARLIE I SSGN	1247	
CHARLIE II SSGN	1248	
ECHO II SSGN	1249	
OSCAR SSGN	1250	
PAPA SSGN	1251	

DFI NAME
809 SUBSURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
UNDEFINED	1252 THROUGH 1345	
SSK GENERAL	1346	
AGOSTA SSK	1347	
UNDEFINED	1348	
FOXTROT SSK	1349	
HEROJ SSK	1350	
KILO SSK	1351	
MING SSK	1352	
NARVAL SSK	1353	
DISUSED	1354 THROUGH 1355	
ROMEO SSK	1356	
SAVA SSK	1357	
SUTJESKA SSK	1358	
TANGO SSK	1359	
UPHOLDER SSK	1360	
WHISKEY SSK	1361	
WHISKEY V SSK	1362	
ZULU IV SSK	1363	
DORIS SSK	1364	
VICTORIA SSK	1365	
TYPE 212 SSK	1366	
UNDEFINED	1367 THROUGH 1665	
SSC GENERAL	1666	
DELFINEN SSC	1667	
DRAKEN SSC	1668	
NAECKEN SSC	1669	
NARHVALEN SSC	1670	
SJOORMEN SSC	1671	
TOTI TYPE 1075 SSC	1672	
TYPE 205 SSC	1673	
TYPE 206 SSC	1674	
KOBHEN SSC	1675	
TYPE 209 (TYPE 1100) SSC	1676	
TYPE 209 (TYPE 1200) SSC	1677	
TYPE 209 (TYPE 1300) SSC	1678	
TYPE 209 (TYPE 1400) SSC	1679	
TYPE 209 (TYPE 1500) SSC	1680	
ULA SSC	1681	
TYPE 211 SSC	1682	
VASTERGOETLAND SSC	1683	
TYPE 206A SSC	1684	

DFI NAME
809 SUBSURFACE (MARITIME) SPECIFIC
TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
UNDEFINED	1685 THROUGH 1945	
SSA GENERAL	1946	
BRAVO SSA	1947	
DOLPHIN (AGSS) SSA	1948	
GOLF I SSA	1949	
GOLF I (MODIFIED) SSA	1950	
GOLF II SSA	1951	
INDIA SSA	1952	
LIMA SSA	1953	
ROMEO SSA	1954	
ZULU SSA	1955	
UNDEFINED	1956 THROUGH 4069	
SUBSURFACE SPECIFIC	4070 THROUGH 4094	
TYPE 1-25		
RESET TO NO STATEMENT	4095	

APPENDIX B

DFI NAME DEFINITION
810 LAND (GROUND) SPECIFIC TYPE THE SPECIFIC TYPE OF POINT OR TRACK ON LAND (GROUND).

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
001 LAND (GROUND) SPECIFIC TYPE [12 BIT]	THE SPECIFIC TYPE OF POINT OR TRACK WITH AN ENVIRONMENT/CATEGORY OF LAND (GROUND).	J3.5C1 J7.0C1 J14.0C5	J3.7C5 J12.0C2 J14.2C5	J6.0E0 J12.6E0 J15.0C1
002 LAND (GROUND) AMBIGUOUS TYPE 1 [12 BIT]	IDENTIFIES THE TARGET SPECIFIC TYPE AS DETERMINED BY AN ONBOARD CORRELATION PROCESS IF THERE ARE NO AMBIGUITIES. IDENTIFIES THE MOST PROBABLE TARGET SPECIFIC TYPE IF AN ONBOARD CORRELATION PROCESS DETERMINES THAT THE SPECIFIC TYPE IS AMBIGUOUS. INFORMATION IN THIS FIELD SHALL BE DERIVED ONLY FROM ONBOARD SOURCES AS OPPOSED TO DATA LINK SOURCES.	J12.6C4	J12.7C2	
003 LAND (GROUND) AMBIGUOUS TYPE 2 [12 BIT]	IDENTIFIES THE SECOND MOST PROBABLE TARGET SPECIFIC TYPE IF AN ONBOARD CORRELATION PROCESS DETERMINES THAT THE SPECIFIC TYPE IS AMBIGUOUS. INFORMATION IN THIS FIELD SHALL BE DERIVED ONLY FROM ONBOARD SOURCES AS OPPOSED TO DATA LINK SOURCES.	J12.6C4	J12.7C2	

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001, 002, AND 003 -----		
NO STATEMENT	0	
TOW	1	
DRAGON	2	
LANCE	3	
SHILLEAGH	4	
SERGEANT	5	
AMMUNITION	6	
POL	7	
OBSERVATION POSTS	8	

DFI NAME
810 LAND (GROUND) SPECIFIC TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
RADIO DIRECTION FINDER	9	
RIVER	10	
STREAM	11	
LAKE	12	
MARSH/SWAMP	13	
MOUNTAIN	14	
HILLTOP	15	
RIDGE	16	
DEPRESSION	17	
VALLEY	18	
CAVE	19	
BRIDGE	20	
DAM	21	
BUILDING	22	
VILLAGE	23	
TOWN	24	
ROAD INTERSECTION	25	
HOSPITAL	26	
HAWK	27	
I-HAWK	28	
PATRIOT	29	
NIKE	30	
REDEYE	31	
STINKER	32	
HELLFIRE	33	
PERSHING	34	
JEEP	35	
CAR	36	
MOTORCYCLE	37	
BICYCLE	38	
AMPHIBIOUS VEHICLE	39	
RIVER CROSSING EQUIPMENT	40	
MECHANIZED MINE SWEEPER	41	
MOBILE RADAR	42	
SMOKE GENERATOR	43	
(SSSB) SHIP SHORE SHIP BUFFER	44	
(RADIL) ROCC AWACS	45	
DIGITAL INTERFACE LINK		
(ASIT) ADAPTABLE SURFACE INTERFACE TERMINAL	46	

DFI NAME
810 LAND (GROUND) SPECIFIC TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
(AEGIS) AEW GROUND	47	
INTERFACE SEGMENT		
AMBULANCE	48	
BIOLOGICAL WEAPONS	49	
CHEMICAL WEAPONS	50	
NUCLEAR WEAPONS	51	
ENGINEER VEHICLES	52	
GENERATOR	53	
JAMMERS	54	
MAINTENANCE VEHICLE	55	
MULTIPLE ROCKET LAUNCHER	56	
RADIO	57	
REMOTE SENSOR	58	
SELF PROPELLED ARTILLERY	59	
TACTICAL BRIDGE	60	
TOWED ARTILLERY GUN	61	
RECOILLESS RIFLE	62	
(TACCP) TACTICAL COMMAND	63	
POST		
BRIGADE	64	
CORPS	65	
GROUP	66	
DIVISION	67	
REGIMENT	68	
BATTALION	69	
COMPANY	70	
PLATOON	71	
SQUADRON	72	
AIRBASE	73	
WING	74	
ANTI-AIRCRAFT GUN	75	
AIR DEFENSE ARTILLERY	76	
GUN		
MORTAR	77	
FLAMETHROWER	78	
TSC/MOCC/MARITIME	79	
HEADQUARTERS		
MAIN BATTLE TANK	80	
MEDIUM TANK	81	
LIGHT TANK	82	
TRAIN	83	

B-572

DFI NAME
810 LAND (GROUND) SPECIFIC TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
ARMORED PERSONNEL VEHICLE	84	
ARMORED INFANTRY FIGHTING VEHICLE	85	
LIGHT TRUCK	86	
MEDIUM TRUCK	87	
HEAVY TRUCK	88	
TANK TRANSPORTER	89	
DUMMY	90	
TRAP	91	
POINT TARGET	92	
EA SITE	93	
ARMORED PERSONNEL CARRIER	94	
ARMORED INFANTRY FIGHTING VEHICLE	95	
GCI SITE	96	
CRC	97	
TACC (AF)	98	
CRP	99	
TACC (MC)	100	
MPC	101	
TAOC	102	
AADCCS (AN/TSQ-73)	103	
DASC	104	
FACP	105	
FASC	106	
AADCP	107	
ASRT	108	
NCC	109	
RCC	110	
ROCC	111	
DC	112	
WOC	113	
(ASOC) AIR SUPPORT OPERATIONS CENTER	114	
(TCO) TACTICAL COMBAT OPERATIONS CENTER	115	
(TOC) TACTICAL OPERATIONS CENTER (ARMY)	116	

B-573

DFI NAME
810 LAND (GROUND) SPECIFIC TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
CHAPPARAL	117	
FIRE DIRECTION CENTER	118	
FIRE UNIT	119	
DIVARTY	120	
BATTERY	121	
SELF-PROPELLED ARTILLERY	122	
(GOC) GROUND OPERATIONS CENTER	123	
(ICC) INFORMATION COORDINATION CENTER	124	
(BOC) BATTERY OPERATIONS CENTER	125	
(ECS) ENGAGEMENT CONTROL STATION	126	
(PCP) PLATOON COMMAND POST	127	
(CRG) COMMUNICATIONS RELAY GROUP	128	
TUNNELS	129	
RAILYARDS	130	
BENCHMARK	131	
TROOP	132	
LANDING ZONE	133	
DROP ZONE	134	
ASSEMBLY OR STAGING AREA	135	
DECONTAMINATION SITE	136	
RE-ENTRY POINT/LINE	137	
CROSSING AREA FOR RECON PATROLS		
SAM	138	
SSM	139	
ANTI-TANK WEAPON	140	
DIRECT SUPPORT	141	
GENERAL SUPPORT	142	
INTERCEPTION	143	
BLOCKING	144	
REINFORCING	145	
REDEPLOYMENT	146	
POLICING	147	
INTRUDING	148	
PREPARING BARRIER	149	

DFI NAME
810 LAND (GROUND) SPECIFIC TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
DUMPING EQUIPMENT	150	
RELIEF	151	
CONVOY	152	
ANTI-AIRCRAFT	153	
AIR DEFENSE ARTILLERY	154	
ARTILLERY	155	
SURVEILLANCE	156	
PICKETING	157	
LOGISTICS SUPPORT	158	
SEARCH	159	
DIRECT ARTILLERY SUPPORT	160	
GENERAL ARTILLERY SUPPORT	161	
MAINTAINING LINE OF COMMUNICATION	162	
COMMITTING	163	
COUNTER-ATTACK	164	
ELECTRONIC WARFARE	165	
THREATEN	166	
DESTROY	167	
CONTACT	168	
EVALUATION	169	
TRANSPORTER	170	
ARMORED VEHICLE	171	
GUN	172	
HALF TRACK	173	
COMMUNICATIONS EQUIPMENT	174	
TARGET	175	
AIR DEFENSE SITE	176	
FIM-92 STINGER	177	
NIM-23 HAWK	178	
MIM-42 REDEYE	179	
MIM-72 CHAPARRAL	180	
MIM-104 PATRIOT	181	
RIM-2 TERRIER	182	
RIM-7 SEA SPARROW	183	
RIM-8 TALOS	184	
RIM-24 TARTAR	185	
RIM-66 STANDARD MISSILE	186	
RIM-67 STANDARD MISSILE	187	
BLOWPIPE	188	

B-575

MIL-STD-6016B
APPENDIX B

DFI NAME
810 LAND (GROUND) SPECIFIC TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
DISUSED	189 THROUGH 190	
SEA DART	191	
DISUSED	192 THROUGH 193	
CROTALE	194	
RAPIER	195	
RBS-70/GIRAFFE	196	
SAM BLOODHOUND	197	
SAM ROLAND	198	
SA-2 GUIDELINE	199	
SA-3 GOA	200	
SA-4 GANEF	201	
SA-N-3 GOBLET	202	
SA-5 GAMMON	203	
SA-N-4 GECKO	204	
SA-6 GAINFUL	205	
SA-N-6 GRUMBLE	206	
SA-7 GRAIL	207	
SA-8 GECKO	208	
SA-9 GASKIN	209	
SA-10 GRUMBLE	210	
SA-11 GADFLY	211	
SA-12	212	
SA-13 GOPHER	213	
MISTRAL	214	
SA-N-7 GADFLY	215	
SA-N-8 GREMLIN	216	
SA-14 GREMLIN	217	
SA-16 GIMLET	218	
SA-X-17	219	
TOC (THAAD)	220	
SSI (THAAD)	221	
LCS (THAAD)	222	
LAUNCHER (THAAD)	223	
TMD-GBR (THAAD)	224	
JTAGS	225	
ADTOC/BN	226	
ADTOC/BDE	227	
ADCP	228	
SM-2 BLOCK II	229	
SM-2 BLOCK III	230	
SM-2 BLOCK IIIA	231	

DFI NAME
810 LAND (GROUND) SPECIFIC TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
SM-2 BLOCK IIIB	232	
SM-2 BLOCK IV	233	
SM-2 BLOCK IVA	234	
SM-3 LEAP	235	
SA-N-5 GRAIL	236	
SA-N-11 GRISOM	237	
SA-12A GLADIATOR	238	
SA-12B GIANT	239	
SA-14 GREMLIN	240	
SA-15 GAUNTLET	241	
SA-17 GRIZZLY	242	
SA-N-12 GRIZZLY	243	
SA-18 GROUSE	244	
SA-19 GRISOM	245	
RIM-116 RAM	246	
ADATS	247	
JAVELIN	248	
STARBURST	249	
STARSTREAK	250	
ASPIDE	251	
FRONT DOOR	252	
ROLAND II	253	
AKASH	254	
ANZA	255	
ANZA II	256	
CSA-1	257	
CSA-2	258	
CSA-4	259	
CSA-5	260	
FM-80	261	
HN-5	262	
NK-7	263	
NK-16	264	
PANTZYZR	265	
RAPIER 2000/JERNAS	266	
RBS-90	267	
SAKR	268	
SAVA	269	
SHANINE	270	
SKYGUARD ASPIDE	271	
SPADA	272	

B-577

MIL-STD-6016B
APPENDIX B

DFI NAME
810 LAND (GROUND) SPECIFIC TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
TAM SAM	273	
TIGERCAT	274	
VANGUARD	275	
SA-N-1 GOA	276	
SA-N-9 GAUNTLET	277	
SA-N-10	278	
ALBATROS/ASPIDE	279	
SM-1	280	
SA-2 IRAQ MOD	281	
SA-2 NORTH KOREA RO	282	
AEGIS-TI	283	
MASURGS	284	
ROCK CAKE	285	
SEA INDIGO	286	
TANSAM	287	
TOKEN A/D	288	
GUARDSMAN	289	
SILKWORM	290	
SNOW DRIFT 11/17	291	
TIGER S	292	
TIGER G	293	
TUBE ARM SA-11	294	
SEACAT 262/903/904	295	
AN/MPQ-4	296	
AN-TPQ-36	297	
AN/TPS-25	298	
CYMBERLINE	299	
PORK TROUGH 1	300	
RASIT	301	
SNAR-6	302	
TALL MIKE	303	
AN/FPN-33/36/40	304	
AN/TPN-12/17	305	
CPN-4, FPN-16/22	306	
RP-2E	307	
RP-4G	308	
THD-1010/1013	309	
TPN-8/14/18TSQ-7	310	
TWO SPOT	311	
CSA-X-2	312	
ASR-0	313	

DFI NAME
810 LAND (GROUND) SPECIFIC TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
FALCON-G	314	
MARCON LN66TPS66	315	
SHEET BEND	316	
WALL RUST A/B	317	
DON-2	318	
DONKAY/PALM FROND	319	
EYE SHIELD	320	
MARELD	321	
PEEL PAIR	322	
POT HEAD	323	
RACAL-DECCA	324	
RICE FIELD	325	
RICE SCREEN	326	
RICE CUP	327	
SQUARE TIE	328	
SS-N-2	329	
STRUT CURVE	330	
STRUT PAIR	331	
BOFI	332	
CORN CAN	333	
DRUM TILT	334	
ELDORADO	335	
FLAP WHEEL	336	
FLEDERMAUS	337	
FLYCATCHER	338	
GEPARD	339	
GUN DISH	340	
SPAAMG	341	
TEAMPLAY	342	
TEAMWORK	343	
VULCAN	344	
9LV 200	345	
AN/SPG-50	346	
BASS TILT	347	
GOALKEEPER	348	
HAWK SCREECH	349	
KITE SCREECH A/B	350	
OWL SCREECH	351	
MARK 68 FCS	352	
MK 57/63 GFCS	353	
MK-86 GFCS	354	

B-579

MIL-STD-6016B
APPENDIX B

DFI NAME
810 LAND (GROUND) SPECIFIC TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
MUFF COB	355	
SIGNAAL STIR 180	356	
SUN VISOR	357	
TOP BOW	358	
TYPE 341	359	
VEGA	360	
WM-20 SERIES	361	
MARCONI S613	362	
THIN SKIN	363	
AN/FPS-77	364	
MRL-1	365	
MRL-4/5	366	
BIG BIRD	367	
SIDE NET	368	
ODD LOT/PAIR/GROUP	369	
FIRE WHEEL/MOD	370	
BARLOCK	371	
FIRECAN/WHIFF	372	
GIN SLING	373	
FRUSKA GORA	374	
TIN SHIELD	375	
BIG BAR/MESH	376	
SS-N-S SCOOP PAIR	377	
SGR-105 DA-01/00	378	
CROSS SLOT	379	
BACK NET/TRAP	380	
GATE POLE/HIGH/POST	381	
TOP LOT	382	
RICE CAKE	383	
JY-14/9	384	
TIN TRAP	385	
HEAD NET A/B/C	386	
SLIM/SEA/HAIR NET	387	
LOW SIEVE	388	
EGG CUP	389	
CUT WEB	390	
SKYWATCH	391	
HALF PLATE	392	
SKIN HEAD	393	
SIEVE FAMILY	394	
SO-A	395	

DFI NAME
810 LAND (GROUND) SPECIFIC TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
HIGH SHELL	396	
AN/FPS-6/89	397	
DECCA HF200	398	
MARCONI 5244	399	
TYPE 88 MK 1	400	
MARCONI S-247	401	
AN/MPN-11	402	
RAT-31S	403	
AA4 MK 6/7	404	
AN/TPS-43	405	
SCR-584	406	
AN/TPS-48	407	
MARCONI S-1006/269	408	
PALMIER	409	
FIREFINDER LR	410	
VOLEX III/IV	411	
THD-1940	412	
HADR (HR-3000)	413	
AN/RPS-70/72/75	414	
MPDR-18/S	415	
WATCHMAN	416	
MARCONI S-631/647	417	
MARCONI S-706/711/712	418	
AN/TPS-73	419	
TRS-22XX	420	
AN/SPS-8	421	
DECCA AWS-1	422	
MK-26	423	
AN/SPS-48	424	
RAN-7S	425	
SEA TIGER	426	
DA-08/2LS	427	
AWS-9 (TYPE 996)	428	
DA-05/00	429	
MPDR-45	430	
TOP STEER/PLATE	431	
STRIKE OUT	432	
SPONGE CAKE	433	
NC1 ROLAND	434	
NC1 MISTRAL	435	
FDOC	436	

DFI NAME
810 LAND (GROUND) SPECIFIC TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
MCT	437	
CETAC	438	
ISARD	439	
UNDEFINED	440 THROUGH 4000	
WAYPOINT	4001	
STRIKE INITIAL POINT	4002	
UNDEFINED	4003 THROUGH 4093	
RESET TO NO STATEMENT	4094	
UNDEFINED	4095	

DFI NAME
814 THREAT WARNING ENVIRONMENT

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 THREAT WARNING ENVIRONMENT [3 BIT]	DESCRIBES THE ENVIRONMENT FROM WHICH A THREAT CAN BE EXPECTED.	J9.0E0 J12.0I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
AIR	1	
SURFACE (MARITIME)	2	
MINES	3	
SUBSURFACE (MARITIME)	4	
LAND (GROUND)	5	
SPACE	6	
UNDEFINED	7	

DFI NAME DEFINITION
815 MODE III IFF INTERROGATION

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 MODE III IFF INTERROGATION [2 BIT] (III INT)	INDICATES THE RESULTS OF A MODE III INTERROGATION.	J12.6C1

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
CORRECT	1	
INCORRECT	2	
NO RESPONSE	3	

DFI	NAME	DEFINITION
816	UTM 100,000 METER SQUARE ROW	THE NORTH-SOUTH DESIGNATOR FOR A 100,000 METER GRID OF A SPECIFIED UNIVERSAL TRANSVERSE MERCATOR (UTM) GRID ZONE ROW.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 UNIVERSAL TRANSVERSE MERCATOR 100,000 METER SQUARE ROW [5 BIT] (UTM MSR)	THE NORTH-SOUTH DESIGNATION FOR A 100,000 METER GRID OF A SPECIFIED UNIVERSAL TRANSVERSE MERCATOR (UTM) GRID ZONE ROW.	J2.5C6 J2.6C6 J3.5C2

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
A	1	
B	2	
C	3	
D	4	
E	5	
F	6	
G	7	
H	8	
ILLEGAL	9	BIT CODE 9 IS ILLEGAL BECAUSE THE GRID DOES NOT USE THE LETTER I.
J	10	
K	11	
L	12	
M	13	
N	14	
ILLEGAL	15	BIT CODE 15 IS ILLEGAL BECAUSE THE GRID DOES NOT USE THE LETTER O.
P	16	
Q	17	
R	18	
S	19	
T	20	
U	21	
V	22	
W	23	
X	24	
Y	25	
Z	26	

DFI	NAME
816	UTM 100,000 METER SQUARE ROW

DATA ITEM (CONTINUED)
ILLEGAL

BIT CODE
27 THROUGH 31

EXPLANATION

DFI NAME DEFINITION
818 UTM GRID ZONE COLUMN IN THE UNIVERSAL TRANSVERSE MERCATOR (UTM) SYSTEM, AN AREA ON THE EARTH'S SURFACE BETWEEN NORTH-SOUTH COLUMNS MEASURING 6 DEGREES EAST-WEST FROM 80 DEGREES SOUTH LATITUDE TO 84 DEGREES NORTH LATITUDE ORIGINATING AT THE 180-DEGREE MERIDIAN.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 UNIVERSAL TRANSVERSE MERCATOR GRID ZONE COLUMN [6 BIT] (UTM GZC)	IN THE UNIVERSAL TRANSVERSE MERCATOR (UTM) SYSTEM, AN AREA ON THE EARTH'S SURFACE BETWEEN NORTH-SOUTH COLUMNS MEASURING DEGREES EAST-WEST FROM 80 DEGREES SOUTH LATITUDE TO 84 DEGREES NORTH LATITUDE ORIGINATING AT THE 180-DEGREE MERIDIAN.	J2.5C6 J2.6C6 J3.5C2

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
UTM GRID ZONE COLUMN	1 THROUGH 60	
UNDEFINED	61 THROUGH 63	

DFI NAME DEFINITION
819 UTM EASTING THE NUMERICAL PART OF THE UNIVERSAL TRANSVERSE MERCATOR (UTM)
GRID REFERENCE WHICH INDICATES THE EASTING COORDINATE.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 UNIVERSAL TRANSVERSE MERCATOR 10-METER EASTING [14 BIT]	THE NUMERICAL PART OF THE UNIVERSAL TRANSVERSE MERCATOR (UTM) GRID REFERENCE WHICH INDICATES THE EASTING COORDINATE TO THE CLOSEST 10 METERS.	J2.5C6 J2.6C6 J3.5C2

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
0 THROUGH 99,990 METERS ILLEGAL	0 THROUGH 9999 10000 THROUGH 16383	IN 10 METER INCREMENTS.

DFI NAME DEFINITION
820 UTM NORTHING THE NUMERICAL PART OF THE UNIVERSAL TRANSVERSE MERCATOR (UTM)
GRID REFERENCE WHICH INDICATES THE NORTHING COORDINATE.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 UNIVERSAL TRANSVERSE MERCATOR 10-METER NORTHING [14 BIT]	THE NUMERICAL PART OF THE UNIVERSAL TRANSVERSE MERCATOR (UTM) GRID REFERENCE WHICH INDICATES THE NORTHING COORDINATE TO THE CLOSEST 10 METERS.	J2.5C6 J2.6C6 J3.5C2

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
0 THROUGH 99,990 METERS ILLEGAL	0 THROUGH 9999 10000 THROUGH 16383	IN 10 METER INCREMENTS.

B-590

STATUS:

APPENDIX B

MIL-STD-6016B

NO STATEMENT

0

1

2

3

4

5

6

7

8

BIT CODE 9 IS ILLEGAL BECAUSE THE
GRID DOES NOT USE THE LETTER I.

10

11

12

13

14

15

BIT CODE 15 IS ILLEGAL BECAUSE THE
GRID DOES NOT USE THE LETTER O.

16

17

18

19

20

21

22

23

24

25

APPENDIX B

DFI	NAME		BIT CODE	EXPLANATION
821	UTM 100,000-METER SQUARE COLUMN			
	DATA ITEM (CONTINUED)			
	Z		26	
	ILLEGAL		27 THROUGH 31	

APPENDIX B

DFI	NAME	DEFINITION
825	UTM GRID ZONE ROW	IN THE UNIVERSAL TRANSVERSE MERCATOR (UTM) SYSTEM, AN AREA ON THE EARTH'S SURFACE FROM 80 DEGREES SOUTH LATITUDE AND 84 DEGREES NORTH LATITUDE MEASURING 8 DEGREES NORTH-SOUTH WHICH EXTENDS EAST-WEST FOR 360 DEGREES ORIGINATING AT THE 180-DEGREE MERIDIAN (EXCEPT THE ROW OR BAND FROM 72 TO 84 DEGREES NORTH, WHICH COVERS 12 DEGREES NORTH-SOUTH).

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
001 UNIVERSAL TRANSVERSE MERCATOR GRID ZONE ROW [5 BIT] (UTM GZR)	IN THE UNIVERSAL TRANSVERSE MERCATOR (UTM) SYSTEM, AN AREA ON THE EARTH'S SURFACE FROM 80 DEGREES SOUTH LATITUDE AND 84 DEGREES NORTH LATITUDE MEASURING 8 DEGREES NORTH-SOUTH WHICH EXTENDS EAST-WEST FOR 360 DEGREES ORIGINATING AT THE 180-DEGREE MERIDIAN (EXCEPT THE ROW OR BAND FROM 72 TO 84 DEGREES NORTH, WHICH COVERS 12 DEGREES NORTH-SOUTH).	J2.5C6	J2.6C6	J3.5C2

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
A	1	
B	2	
C	3	
D	4	
E	5	
F	6	
G	7	
H	8	
ILLEGAL	9	BIT CODE 9 IS ILLEGAL BECAUSE THE GRID DOES NOT USE THE LETTER I.
J	10	
K	11	
L	12	
M	13	
N	14	
ILLEGAL	15	BIT CODE 15 IS ILLEGAL BECAUSE THE GRID DOES NOT USE THE LETTER O.

APPENDIX B

DFI NAME
825 UTM GRID ZONE ROW

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
P	16	
Q	17	
R	18	
S	19	
T	20	
U	21	
V	22	
W	23	
X	24	
Y	25	
Z	26	
ILLEGAL	27 THROUGH 31	

DFI	NAME	DEFINITION
826	TIME TAG, TIME OF VALIDITY	IDENTIFIES THE GROUP OF 24 CONSECUTIVE TIME SLOTS DURING WHICH THE UTM/UPS POSITION IS VALID.

DATA STANDARD USAGE: Link 16	STATUS:
------------------------------	---------

DUI NAME	EXPLANATION	APPLICABILITY
001 TIME TAG, TIME OF VALIDITY [9 BIT] (TTG TOV)	IDENTIFIES THE GROUP OF 24 (8 TIME SLOTS * 3 SETS) CONSECUTIVE TIME SLOT SETS DURING WHICH THE UTM/UPS POSITION IS VALID.	J2.5C6 J2.6C6 J3.5C2

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		

EACH VALUE DEFINES A TIME SPAN OF 24 * 0.0078125 SECONDS = 0.1875 SECONDS. THE VALUE CORRESPONDS TO BITS 5 THROUGH 13 OF THE TIME SLOT NUMBER THUS DESIGNATING A GROUP OF 24 CONSECUTIVE TIME SLOT NUMBERS IDENTIFIED BY BITS 2 THROUGH 4 (8 TIME SLOTS) AND BITS 0 THROUGH 1 (3 SETS; A, B, AND C) OF THE TIME SLOT NUMBER. EACH VALUE CAN DEFINE EIGHT PERIODS DURING AN EPOCH DEPENDING ON THE VALUE OF BITS 14 THROUGH 16 OF THE TIME SLOT NUMBER.

NUMERIC	0 THROUGH 511
---------	---------------

DFI	NAME	DEFINITION
828	RADAR CHANNEL INDICATOR	PROVIDES THE TYPE OF RADAR CHANNEL.

DATA STANDARD USAGE: Link 16	STATUS:
------------------------------	---------

DUI NAME	EXPLANATION	APPLICABILITY
001 RADAR CHANNEL INDICATOR [1 BIT] (RDC IND)	INDICATES WHETHER THE RADAR IS OPERATING ON A SINGLE RF CHANNEL OR FREQUENCY AGILITY RF CHANNEL GROUP.	J13.2I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
SINGLE RF CHANNEL OPERATION	0	
AUTOMATIC FREQUENCY AGILITY OPERATION	1	

DFI NAME DEFINITION
838 INFORMATION GROUP SPECIFIES THE INFORMATION GROUP TO WHICH AN ASSIGNED BLOCK OF TIME SLOTS APPLY.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
002 PARTICIPATION GROUP, 1 [9 BIT]	SPECIFIES THE PARTICIPATION GROUP TO WHICH AN ASSIGNED BLOCK OF TIME SLOTS APPLY.	J0.6C1	J0.6C2	J1.6E0
003 PARTICIPATION GROUP, 2 [9 BIT]	SPECIFIES THE PARTICIPATION GROUP TO WHICH AN ASSIGNED BLOCK OF TIME SLOTS APPLY.	J0.6C1	J0.6C2	J1.6E0
004 PARTICIPATION GROUP [9 BIT] (PTC GRP)	SPECIFIES THE INDEX NUMBER OF THE PARTICIPATION GROUP TO WHICH AN ASSIGNED BLOCK OF TIME SLOTS APPLY.	J0.3I J0.4E0	J0.3E0 J0.6I	J0.4I J0.6C3
005 PARTICIPATION GROUP, 3 [9 BIT]	SPECIFIES THE PARTICIPATION GROUP TO WHICH AN ASSIGNED BLOCK OF TIME SLOTS APPLY.	J0.6C1		
006 PARTICIPATION GROUP, 4 [9 BIT]	SPECIFIES THE PARTICIPATION GROUP TO WHICH AN ASSIGNED BLOCK OF TIME SLOTS APPLY.	J0.6C1		

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 002-006 -----		
NO STATEMENT	0	
INITIAL ENTRY	1	
RTT A	2	
RTT B	3	
NETWORK MANAGEMENT	4	
PPLI AND STATUS GROUP A	5	
PPLI AND STATUS GROUP B	6	
SURVEILLANCE	7	
MISSION MANAGEMENT/ WEAPONS COORDINATION	8	
CONTROL	9	
ELECTRONIC WARFARE	10	
UNDEFINED	11	

DFI NAME
838 INFORMATION GROUP

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
VOICE GROUP A	12	
VOICE GROUP B	13	
PARTICIPATION GROUPS 14 THROUGH 18	14 THROUGH 18	DEFINED BY INTERFACE OPERATING PROCEDURES AND TACTICAL COMMUNICATIONS PLAN.
NONC2 JU-TO-NONC2 JU A	19	
NONC2 JU-TO-NONC2 JU B	20	
ENGAGEMENT COORDINATION	21	
COMPOSITE A	22	
COMPOSITE B	23	
PARTICIPATION GROUPS 24 THROUGH 26	24 THROUGH 26	DEFINED BY INTERFACE OPERATING PROCEDURES AND TACTICAL COMMUNICATIONS PLAN.
JOINT NET PPLI	27	
DISTRIBUTED NETWORK MANAGEMENT	28	
RESIDUAL MESSAGES	29	
IJMS POSITION AND STATUS	30	
OTHER IJMS	31	
PARTICIPATION GROUPS 32 THROUGH 509	32 THROUGH 509	DEFINED BY INTERFACE OPERATING PROCEDURES AND TACTICAL COMMUNICATIONS PLAN.
NET CONTROL NEEDLINE	510	
NET STATUS NEEDLINE	511	

DFI NAME DEFINITION
839 PPLI DATA INDICATOR INDICATES THAT THE DATA SPECIFIED WAS RECEIVED PREVIOUSLY IN A PPLI MESSAGE.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
001 PPLI TRACK NUMBER AND IDENTITY INDICATOR [1 BIT] (PP T/I)	INDICATES WHETHER OR NOT THE REFERENCE TN AND IDENTITY IN THIS MESSAGE WAS RECEIVED PREVIOUSLY IN A PPLI MESSAGE.	J3.2I J3.5I	J3.3I J5.4I	J3.4I
002 PPLI IFF/SIF INDICATOR [2 BIT] (PP IFF)	INDICATES WHETHER OR NOT THE IFF/SIF DATA IN THIS MESSAGE WAS RECEIVED PREVIOUSLY IN A PPLI MESSAGE.	J3.2C1	J3.3C1	J3.5C1

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
SOURCE OF TN AND IDENTITY IS FROM PPLI	1	INDICATES THAT THE REFERENCE TN AND IDENTITY IN THIS MESSAGE WAS RECEIVED IN A PPLI MESSAGE.
----- FOR DUI 002 -----		
NO STATEMENT	0	
SOURCE OF MODE II CODE IS FROM PPLI	1	THE MODE II CODE IN THIS MESSAGE WAS RECEIVED PREVIOUSLY IN A PPLI MESSAGE.
SOURCE OF ALL IFF DATA IS FROM PPLI	2	ALL IFF/SIF DATA IN THIS MESSAGE WAS RECEIVED PREVIOUSLY IN A PPLI MESSAGE.
UNDEFINED	3	

B-598

MIL-STD-6016B
APPENDIX B

DFI	NAME	DEFINITION
843	RELAY DELAY	SPECIFIES THE DELAY IN TIME SLOTS (FULL OR HALF) BETWEEN THE TIME SLOT DURING WHICH AN ORIGINAL MESSAGE IS RECEIVED AND THE TIME IN WHICH IT IS TO BE RELAYED.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 RELAY DELAY [5 BIT]	SPECIFIES THE DELAY IN TIME SLOTS BETWEEN THE TIME SLOT DURING WHICH A MESSAGE IS RECEIVED AND THE TIME SLOT IN WHICH IT WILL BE RELAYED.	J0.4E0
005 OFFSET, VOICE B [5 BIT]	SPECIFIES THE DELAY IN TIME SLOTS BETWEEN THE VOICE A PARTICIPATION GROUP TIME SLOTS AND ITS CORRESPONDING VOICE B PARTICIPATION GROUP TIME SLOTS.	J0.0I
006 RELAY DELAY, PPLI A [5 BIT]	SPECIFIES THE DELAY IN TIME SLOTS BETWEEN THE TIME SLOT DURING WHICH AN ORIGINAL MESSAGE IS RECEIVED AND THE TIME SLOT IN WHICH IT IS TO BE RELAYED.	J0.0E0
007 RELAY DELAY, CONTROL [5 BIT]	SPECIFIES THE DELAY IN TIME SLOTS BETWEEN THE TIME SLOT DURING WHICH AN ORIGINAL MESSAGE IS RECEIVED AND THE TIME SLOT IN WHICH IT IS TO BE RELAYED.	J0.0E0
010 RELAY DELAY, RECEIVE 1 [7 BIT]	SPECIFIES THE RECEIVE ASSIGNMENT TIME SLOT BY THE NUMBER OF TIME SLOTS FOLLOWING EACH TIME SLOT OF THE BLOCK EXPLICITLY SPECIFIED, EXCEPT IN THE FOLLOWING CASE. WHEN THE TIME SLOT ASSIGNMENT TYPE IS SET TO RECEIVE, THE CRYPTOMODE INDICATOR FIELD IS SET TO THE PARTITIONED VARIABLE MODE, AND THE TIME SLOT ASSIGNMENT QUALIFIER IS SET TO ZERO, THE RELAY DELAY, RECEIVE 1 FIELD SPECIFIES THE TIME SLOT TO BE USED FOR DECRYPTION, BY THE NUMBER OF TIME SLOTS PRIOR TO	J0.3E0

DFI NAME
843 RELAY DELAY

DUI NAME	EXPLANATION	APPLICABILITY
010 (CONTINUED)	THE TIME SLOT OF THE RECEIVED MESSAGE IN THE BLOCK EXPLICITLY SPECIFIED.	
011 RELAY DELAY, RECEIVE 2 [7 BIT]	SPECIFIES THE TIME SLOT TO BE USED FOR MESSAGE DECRYPTION BY THE NUMBER OF TIME SLOTS PRIOR TO THE TIME SLOT IN WHICH THE MESSAGE TO BE RELAYED IS RECEIVED.	J0.4C1

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001, 006, AND 007 -----		
NO STATEMENT	0	
ILLEGAL	1 THROUGH 5	
6 THROUGH 31 TIME SLOTS	6 THROUGH 31	IN ONE TIME SLOT INCREMENTS.
----- FOR DUI 005 -----		
NO STATEMENT	0	
1 THROUGH 31 TIME SLOTS	1 THROUGH 31	IN ONE TIME SLOT INCREMENTS.
----- FOR DUI 010 AND 011 -----		
NO STATEMENT	0	
ILLEGAL	1 THROUGH 5	
NUMERIC	6 THROUGH 127	IN ONE TIME SLOT INCREMENTS.

DFI	NAME	DEFINITION
844	RTT INTERROGATION TYPE	SPECIFIES WHETHER AN RTT INTERROGATION MESSAGE IS A TYPE 2A (ADDRESSED) OR TYPE 2B (BROADCAST) MESSAGE.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 RTT INTERROGATION TYPE [1 BIT] (RTT TYP)	SPECIFIES WHETHER AN RTT INTERROGA- TION MESSAGE IS AN ADDRESSED OR A BROADCAST MESSAGE.	RTT-A RTT-B

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
ADDRESSED MESSAGE	0	
BROADCAST MESSAGE	1	

DFI NAME
845 ACTIVE RUNWAY

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
002 ACTIVE RUNWAY DIRECTION [6 BIT]	THE GENERAL DIRECTION OF THE ACTIVE RUNWAY.	J13.0E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 002 -----		
0 DEGREES THROUGH 350 DEGREES	0 THROUGH 35	IN 10 DEGREE INCREMENTS.
NO STATEMENT ILLEGAL	36 37 THROUGH 63	

DFI	NAME	DEFINITION
847	SET (TIME SLOT)	SPECIFIES THE SET OF TIME SLOTS (SLOTS A, B, C)), EACH CONSISTING OF 32,768 TIME SLOTS PER EPOCH. THIS FIELD IS THE SAME AS THE TWO LSBs OF THE TIME SLOT NUMBER FIELD (REF 20).

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 TIME SLOT SET, NET STATUS PARTICIPATION GROUP [2 BIT] (TSS NSN)	SPECIFIES THE SET OF TIME SLOTS AS SLOTS A, B, OR C EACH CONSISTING OF 32,768 TIME SLOTS PER EPOCH.	J1.5E0
002 TIME SLOT SET, NEW [2 BIT] (TSS NEW)	SPECIFIES THE NEW SET OF THE TIME SLOT AT THE TIME OF EXECUTION.	J0.2I
012 TIME SLOT SET, CURRENT [2 BIT] (TSS CUR)	SPECIFIES THE SET OF TIME SLOTS AS SLOTS A, B, OR C EACH CONSISTING OF 32,768 TIME SLOTS PER EPOCH.	J0.0C1
013 TIME SLOT SET [2 BIT]	SPECIFIES THE SET OF TIME SLOTS AS SLOTS A, B, OR C EACH CONSISTING OF 32,768 TIME SLOTS PER EPOCH.	J0.3E0 J0.4E0
016 TIME SLOT SET, RTT-B [2 BIT] (TSS RTT)	SPECIFIES THE SET OF TIME SLOTS AS SLOTS A, B, OR C EACH CONSISTING OF 32,768 TIME SLOTS PER EPOCH.	J0.0I
017 TIME SLOT SET, VOICE A [2 BIT] (TSS V-A)	SPECIFIES THE SET OF TIME SLOTS AS SLOTS A, B, OR C EACH CONSISTING OF 32,768 TIME SLOTS PER EPOCH.	J0.0I
018 TIME SLOT SET, PPLI A [2 BIT] (TSS PA)	SPECIFIES THE SET OF TIME SLOTS AS SLOTS A, B, OR C EACH CONSISTING OF 32,768 TIME SLOTS PER EPOCH.	J0.0E0
019 TIME SLOT SET, PPLI B 1 [2 BIT] (TSS PB1)	SPECIFIES THE SET OF TIME SLOTS AS SLOTS A, B, OR C EACH CONSISTING OF 32,768 TIME SLOTS PER EPOCH.	J0.0E0
020 TIME SLOT SET, PPLI B 2 [2 BIT] (TSS PB2)	SPECIFIES THE SET OF TIME SLOTS AS SLOTS A, B, OR C EACH CONSISTING OF 32,768 TIME SLOTS PER EPOCH.	J0.0E0
021 TIME SLOT SET, CONTROL [2 BIT] (TSS CNT)	SPECIFIES THE SET OF TIME SLOTS AS SLOTS A, B, OR C EACH CONSISTING	J0.0E0

DFI NAME
847 SET (TIME SLOT)

DUI NAME	EXPLANATION	APPLICABILITY
021 (CONTINUED)	OF 32,768 TIME SLOTS PER EPOCH.	
DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001, 002, 012, 013, AND 016-021 -----		
NO STATEMENT	0	WHEN THE TIME SLOT SET FIELD FOR A TIME SLOT BLOCK ASSIGNMENT IS SET TO NO STATEMENT, THE ENTIRE TIME SLOT BLOCK ASSIGNMENT WILL BE INTERPRETED AS NO STATEMENT.
SET A	1	
SET B	2	
SET C	3	

DFI	NAME	DEFINITION
849	TYPE MODIFIER	MODIFIES THE INTERPRETATION OF THE TYPE FIELD OF FREE TEXT MESSAGES (TYPES 0, 3, 4, AND 5)

DATA STANDARD USAGE: Link 16	STATUS:
------------------------------	---------

DUI NAME	EXPLANATION	APPLICABILITY
002 TYPE MODIFIER [1 BIT] (TM)	MODIFIES THE INTERPRETATION OF THE TYPE FIELD OF FREE TEXT MESSAGES (TYPES 0, 1, 2, AND 6)	HEADER

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 002 -----		
TYPE MODIFICATION 0	0	AFFECTS THE INTERPRETATION OF TIME SLOT TYPES 0, 1, 2, AND 6.
TYPE MODIFICATION 1	1	AFFECTS THE INTERPRETATION OF TIME SLOT TYPES 0, 1, 2, AND 6.

DFI NAME DEFINITION
850 RELAY CONTROL SPECIFIES THE BASIC RADIO RELAYING CONTROL REQUIREMENTS TO BE
EXECUTED BY THE ADDRESSED TERMINAL.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
003 RELAY CONTROL ACTION [3 BIT] (RC ACT)	SPECIFIES THE BASIC RADIO RELAYING CONTROL REQUIREMENTS TO BE EXECUTED BY THE ADDRESSED TERMINAL.	J0.4I J0.4E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 003 -----		
DELETE	0	
SUSPEND	1	
CONDITIONAL	2	
UNCONDITIONAL	3	
MESSAGE DIRECTED	4	
EQUAL ZERO		
MESSAGE DIRECTED	5	
EQUAL ONE		
UNDEFINED	6	
NO STATEMENT	7	

B-606

MIL-STD-6016B
APPENDIX B

APPENDIX B

DFI NAME DEFINITION
852 CHANNEL IDENTIFIES THE CHANNEL SELECTED.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 RADAR CHANNEL [6 BIT]	IDENTIFIES THE RADAR RF CHANNEL OR AUTOMATIC FREQUENCY AGILITY CHANNEL GROUP SELECTED. THE FREQUENCY(IES) ASSOCIATED WITH EACH RADAR CHANNEL OR FREQUENCY AGILITY CHANNEL GROUP IS/ARE UNIQUE TO EACH AIR SPECIFIC TYPE.	J13.2I
002 MISSILE CHANNEL [6 BIT]	SPECIFIES THE MISSILE CHANNEL SELECTED FOR THE WEAPON REPORTED IN TYPE OF STORES, 1.	J13.2C1

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001 AND 002 -----		
NO STATEMENT	0	
SELECTED CHANNEL 1 THROUGH 63	1 THROUGH 63	

DFI NAME
857 FUTURE EVENT

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
----------	-------------	---------------

001 FUTURE EVENT DESCRIPTOR [3 BIT]	USED IN CONJUNCTION WITH THE TIME INDICATOR FIELD FOR DESCRIBING FUTURE EVENTS.
--	---

J12.6C5

DATA ITEM	BIT CODE	EXPLANATION
-----------	----------	-------------

----- FOR DUI 001 -----

NO STATEMENT
SWAP RADAR CHANNELS

0
1

AT THE TIME OF EVENT SPECIFIED, THE
ADDRESSED PLATFORM WILL SWITCH TO
THE RADAR CHANNEL OR CHANNEL SET
PROVIDED IN THE J12.6C6 WORD.

ENABLE PREDETERMINED
TARGET JAMMING

2

AT THE TIME OF EVENT SPECIFIED, THE
ADDRESSED PLATFORM WILL ENABLE A
PREDEFINED COUNTER MEASURES
TECHNIQUE AGAINST THE TARGET. A
DURATION TIME FOR JAMMING MAY BE
SPECIFIED USING THE EVENT DURATION
FIELDS.

LAUNCH MISSILE

3

AT THE TIME OF EVENT SPECIFIED, THE
ADDRESSED PLATFORM WILL LAUNCH A
MISSILE AT THE TARGET.

UNDEFINED

4 THROUGH 7

DFI NAME DEFINITION
863 RELAY FUNCTION SPECIFIES THE RELAY FUNCTION THE ADDRESSED TERMINAL IS
ASSIGNED.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 RELAY FUNCTION [3 BIT] (REL FTC)	SPECIFIES THE RELAY FUNCTION THE ADDRESSED TERMINAL IS ASSIGNED.	J0.4I J0.4E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
MAIN NET	0	
VOICE RELAY	1	
CONTROL RELAY	2	
ZOOM RELAY	3	
DIRECTED RELAY	4	
ALL RELAY FUNCTIONS	5	ILLEGAL FOR THE J0.4E0 WORD.
PARTICIPATION GROUP	6	ILLEGAL FOR THE J0.4E0 WORD.
NO STATEMENT	7	ILLEGAL FOR THE J0.4E0 WORD.

DFI	NAME	DEFINITION	
865	RELAY LABEL		
DATA STANDARD USAGE: Link 16		STATUS:	
DUI NAME	EXPLANATION	APPLICABILITY	
001 RELAY LABEL, DIRECTED [6 BIT]	PROVIDES THE RELAY LABEL FOR DIRECTED RELAY.	J0.4I J0.4E0	
DATA ITEM	BIT CODE	EXPLANATION	
----- FOR DUI 001 -----			
NO STATEMENT	0		
RELAY LABEL	1 THROUGH 63		

DFI NAME
866 LOCATION OF CRYPTOVARIABLE

DEFINITION
THE PHYSICAL LOCATION OF THE CRYPTOVARIABLE.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
003 MEMORY LOCATION, REKEY [3 BIT]	INDICATES MEMORY LOCATIONS OF THE KGV-8 IN WHICH THE CRYPTOVARIABLE TO BE REKEYED IS STORED.	J31.0C2 J31.1I
004 MEMORY LOCATION, REQUEST [4 BIT]	INDICATES THE MEMORY LOCATION OF THE KGV-8 IN WHICH THE REQUESTED CRYPTOVARIABLE WILL BE STORED.	J31.0C1

DATA ITEM	BIT CODE	EXPLANATION
-----------	----------	-------------

----- FOR DUI 003 -----

LOCATION	0 THROUGH 7
----------	-------------

----- FOR DUI 004 -----

LOCATION	0 THROUGH 7
ILLEGAL	8 THROUGH 14
NO STATEMENT	15

INDICATES A SPECIFIC LOCATION IS NOT
OR CANNOT BE SPECIFIED.

DFI	NAME	DEFINITION
875	CRYPTOPERIOD INDICATOR	INDICATES THE CRYPTOPERIOD FOR WHICH THIS INFORMATION IS APPLICABLE.

DATA STANDARD USAGE: Link 16	STATUS:
------------------------------	---------

DUI NAME	EXPLANATION	APPLICABILITY
002 CRYPTOPERIOD INDICATOR, REQUEST [1 BIT] (CP IND)	INDICATES THE CRYPTOPERIOD FOR WHICH THE REQUESTED CRYPTOVARIABLE IS APPLICABLE.	J31.0C1

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 002 -----		
PRESENT CRYPTOPERIOD	0	
NEXT CRYPTOPERIOD	1	

DFI NAME
876 ACTION CODE, OTAR

DEFINITION
DEFINES THE ACTION TO BE PERFORMED BY THE RECEIVING SYSTEM.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 ACTION CODE, OVER-THE-AIR REKEYING [4 BIT] (AC)	DEFINES THE ACTIONS TO BE PERFORMED BY THE RECEIVING SYSTEM UPON RECEIPT OF AN OVER-THE-AIR REKEYING MANAGEMENT MESSAGE, AND DEFINES REPORT TRANSMITTED IN RESPONSE TO AN OVER-THE-AIR REKEYING MANAGEMENT MESSAGE.	J31.0I J31.1I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
CHANGE CRYPTOVARIABLE IMMEDIATELY	0	ILLEGAL FOR THE J31.0 MESSAGE.
CHANGE CRYPTOVARIABLE AT TIME SPECIFIED	1	THE J31.1 MESSAGE WILL FOLLOW IN A SEPARATE TIME SLOT.
CRYPTOVARIABLE STATUS REPORT	2	THIS REPORT IS TRANSMITTED IN RESPONSE TO A CRYPTOVARIABLE STATUS REQUEST. ILLEGAL FOR THE J31.1 MESSAGE.
DIRECT CRYPTOVARIABLE REQUEST	3	REKEY THE REQUESTING UNIT INDICATED BY THE SOURCE TN WITH THE CRYPTOVARIABLE INDICATED IN THE J31.0C1 WORD. ILLEGAL FOR THE J31.1 MESSAGE.
INDIRECT CRYPTOVARIABLE REQUEST	4	REKEY THE UNIT INDICATED BY THE TN SPECIFIED WITH THE CRYPTOVARIABLE INDICATED IN THE J31.0C1 WORD. ILLEGAL FOR THE J31.1 MESSAGE.
CRYPTOVARIABLE STATUS REQUEST	5	SUBMIT A CRYPTOVARIABLE STATUS REPORT. ILLEGAL FOR THE J31.1 MESSAGE.
PACKED OTAR	6	CHANGE CRYPTOVARIABLE AT TIME SPECIFIED. MESSAGE GENERATED BY THE SYSTEM CONTROLLER TO REKEY REMOTE JUS WHEN THE EXECUTION TIME IS OTHER THAN IMMEDIATE.
PACKED OTMR	7	CHANGE CRYPTOVARIABLE AT TIME SPECIFIED. MESSAGE GENERATED BY

DFI NAME
876 ACTION CODE, OTAR

DATA ITEM (CONTINUED)
(CONTINUED)

UNDEFINED
RESERVED FOR CLASS 1

BIT CODE

8 THROUGH 13
14 THROUGH 15

EXPLANATION
THE SYSTEM CONTROLLER TO REKEY ITS
OWN TERMINAL WHEN EXECUTION TIME
IS OTHER THAN IMMEDIATE.

DFI NAME DEFINITION
878 FLIGHT DECK STATUS DESCRIBES THE OPERATIONAL STATUS OF A SHIPS FLIGHT DECK.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 FLIGHT DECK STATUS [3 BIT]	THE OPERATIONAL STATUS OF A SHIPS FLIGHT DECK.	J13.3I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
READY DECK	1	FLIGHT DECK IS IMMEDIATELY AVAILABLE FOR LANDING.
FOUL DECK	2	FLIGHT DECK IS TEMPORARILY UNAVAILABLE FOR LANDING.
CLOSED DECK	3	FLIGHT DECK IS UNAVAILABLE FOR LANDING.
UNDEFINED	4 THROUGH 7	

B-615

MIL-STD-6016B
APPENDIX B

DFI	NAME	DEFINITION
885	CRYPTOVARIABLE	THE 154 BIT NUMBER THE KGV-8 USES TO ENCRYPT AND DECRYPT A MESSAGE.

DATA STANDARD USAGE: Link 16	STATUS:
------------------------------	---------

DUI NAME	EXPLANATION	APPLICABILITY
001 CRYPTOVARIABLE, PART I [18 BIT]	PART ONE OF THREE PARTS OF THE CRYPTOVARIABLE CONSISTING OF BITS ZERO THROUGH 17 OF THE 154 BITS REQUIRED.	J31.1I
002 CRYPTOVARIABLE, PART II [68 BIT]	PART TWO OF THREE PARTS OF THE CRYPTOVARIABLE CONSISTING OF BITS 18 THROUGH 85 OF THE 154 BITS REQUIRED.	J31.1E0
003 CRYPTOVARIABLE, PART III [68 BIT]	PART THREE OF THREE PARTS OF THE CRYPTOVARIABLE CONSISTING OF BITS 86 THROUGH 153 OF THE 154 BITS REQUIRED.	J31.1E1

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001-003 -----		
AS REQUIRED		

DFI	NAME	DEFINITION
887	CRYPTOVARIABLE SYNCHRONIZATION BITS	PROVIDES THE MONOTONIC BITS TO THE KGV-8 IN ORDER FOR THE KGV-8 TO PROCESS THE PARTICULAR CRYPTOVARIABLE.

DATA STANDARD USAGE: Link 16	STATUS:
------------------------------	---------

DUI NAME	EXPLANATION	APPLICABILITY
001 CRYPTOVARIABLE SYNCHRONIZATION BITS [39 BIT]	PROVIDES THE MONOTONIC BITS TO THE KGV-8 IN ORDER FOR THE KGV-8 TO PROCESS THE PARTICULAR CRYPTOVARIABLE.	J31.0C2

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
AS REQUIRED		

DFI NAME DEFINITION
889 TARGET TYPE SPECIFIES THE TYPE TARGET FOR A GROUND STRIKE MISSION.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 TARGET TYPE [5 BIT]	SPECIFIES THE TYPE TARGET FOR A GROUND STRIKE MISSION.	J12.0C4

DATA ITEM	BIT CODE	EXPLANATION
-----------	----------	-------------

----- FOR DUI 001 -----

NO STATEMENT	0
BRIDGE	1
PETROLEUM, OIL, AND LUBRICANTS (POL)	2
COMMUNICATIONS	3
VEHICLES	4
CONVOY	5
SHIPPING	6
DOCK AREA	7
TROOPS	8
ARMORED VEHICLES	9
RAIL	10
SURFACE-TO-AIR MISSILE (SAM)	11
ANTIAIRCRAFT ARTILLERY (AAA)	12
AIR DEFENSES, AIRCRAFT	13
ARTILLERY/MORTARS	14
PILL BOX/BUNKER	15
GUN EMPLACEMENT	16
FORTIFICATION	17
POWER PLANT	18
INDUSTRIAL SITE	19
SUPPLY DEPOT	20
AIRPORT FACILITIES	21
ROAD	22
TUNNEL	23
DAM	24
WARSHIP (LARGE)	25
WARSHIP (MEDIUM)	26
WARSHIP (SMALL)	27

DFI NAME
889 TARGET TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
OTHER SURFACE (MARITIME)	28	
VESSELS		
AIRBASE	29	
UNDEFINED	30 THROUGH 31	

DFI NAME DEFINITION
890 TARGET DEFENSES DESCRIBES THE GENERAL TYPE OF THREAT REPORTED.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
002 TARGET DEFENSES [3 BIT]	DESCRIBES THE TYPE OF GROUND DEFENSE IN A TARGET AREA.	J12.0C4

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 002 -----		
NO STATEMENT	0	
AIRCRAFT	1	
SURFACE-TO-AIR MISSILE (SAM)	2	
NO KNOWN DEFENSES	3	
ANTIAIRCRAFT ARTILLERY (AAA)	4	
SMALL ARMS	5	
UNDEFINED	6 THROUGH 7	

B-620

MIL-STD-6016B
APPENDIX B

DFI	NAME	DEFINITION
891	TOTAL POINTS IN SERIES	THE TOTAL NUMBER OF INDIVIDUAL POINTS THAT ARE BEING TRANSMITTED IN THIS SERIES OF POINTS.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 TOTAL POINTS IN SERIES [4 BIT] (TOT PTS)	THE TOTAL NUMBER OF INDIVIDUAL POINTS THAT ARE BEING TRANSMITTED IN THIS SERIES OF POINTS.	J12.3I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
1 THROUGH 15 POINTS	1 THROUGH 15	

DFI NAME DEFINITION
892 PASSIVE/ACTIVE INDICATOR INDICATES WHETHER REFERENCE TN IS BEING DETECTED BY ACTIVE OR PASSIVE SENSOR.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 PASSIVE/ACTIVE INDICATOR [1 BIT] (PAS ACT)	THIS INDICATOR IDENTIFIES THE TYPE OF SENSOR AS EITHER PASSIVE OR ACTIVE.	J3.2E0 J3.3E0 J3.5E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
PASSIVE	0	DATA BEING REPORTED WAS DERIVED FROM A PASSIVE SENSOR SYSTEM.
ACTIVE	1	DATA BEING REPORTED WAS DERIVED FROM AN ACTIVE SENSOR SYSTEM.

DFI	NAME	DEFINITION
893	COMMAND AND CONTROL INDICATOR	THIS INDICATOR ALLOWS A JU TO IDENTIFY ITSELF AS A NONC2 OR C2 UNIT.

DATA STANDARD USAGE: Link 16	STATUS:
------------------------------	---------

DUI NAME	EXPLANATION	APPLICABILITY
001 COMMAND AND CONTROL INDICATOR [1 BIT] (C2 IND)	THIS INDICATOR ALLOWS A JU TO IDENTIFY ITSELF AS A NONC2 OR C2 UNIT.	J2.0I J2.2I J2.3I J2.4I J2.5I J2.6I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NONC2 UNIT	0	THE UNIT BEING REPORTED IS A NONC2 UNIT.
C2 UNIT	1	THE UNIT BEING REPORTED IS A C2 UNIT.

DFI	NAME	DEFINITION
894	VOICE GROUP	DEFINES THE VOICE GROUP.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 VOICE GROUP [4 BIT] (VC GP)	DEFINES THE VOICE GROUP.	J0.4I J0.4E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
VOICE GROUP, A	1	
VOICE GROUP, B	2	
UNDEFINED	3 THROUGH 15	

DFI NAME
896 RELAY ASSIGNMENT INDICATOR

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
----------	-------------	---------------

001 PARTICIPATION GROUP RELAY ASSIGNMENT INDICATOR [1 BIT] (PGR IND)	INDICATES WHETHER OR NOT THE ASSIGNMENT IS FOR RELAY OF A PARTICIPATION GROUP.	J0.4E0
--	--	--------

DATA ITEM	BIT CODE	EXPLANATION
-----------	----------	-------------

----- FOR DUI 001 -----

ALL OTHER RELAY ASSIGNMENTS	0	
PARTICIPATION GROUP RELAY ASSIGNMENT	1	

DFI NAME
897 ACTION CODE, CRYPTOVARIABLE

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 ACTION CODE, CRYPTOVARIABLE [4 BIT]	WHEN NET NUMBER AND/OR PARTICIPATION GROUP FIELDS ARE SET TO NO STATE- MENT, THE INDICATED ACTION CODE APPLIES TO ALL NET NUMBERS AND/OR ALL PARTICIPATION GROUPS. WHEN CRYPTOVARIABLE LOGICAL LABEL B AND/OR D ARE SET TO NO STATEMENT, THE CRYPTOVARIABLE LOGICAL LABEL A AND/OR C SHALL BE USED.	J0.6C3 J0.6C4

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
ACTION ONE	1	USE TRANSEC CRYPTOVARIABLE LOGICAL LABEL A INSTEAD OF TRANSEC CRYPTO- VARIABLE LOGICAL LABEL B AND MSEC CRYPTOVARIABLE LOGICAL LABEL C INSTEAD OF MSEC CRYPTOVARIABLE LOGICAL LABEL D ON THE INDICATED PARTICIPATION GROUPS ON THE INDICATED NETS AT THE INDICATED TIME. ILLEGAL FOR J0.6C4 CONTINUATION WORD.
ACTION TWO	2	USE TRANSEC CRYPTOVARIABLE LOGICAL LABEL A INSTEAD OF TRANSEC CRYPTOVARIABLE LOGICAL LABEL B AND MSEC CRYPTOVARIABLE LOGICAL LABEL C INSTEAD OF MSEC CRYPTOVARIABLE LOGICAL LABEL D AND CHANGE TO INDICATED NETS ON INDICATED PARTICIPATION GROUP AT THE INDICATED TIME. ILLEGAL FOR THE J0.6C4 CONTINUATION WORD.
ACTION THREE	3	USE CRYPTOVARIABLE LOGICAL LABEL, MSEC INITIALIZATION FOR VOICE A, VOICE B, AND CONTROL ON THE INDICATED NETS AT THE INDICATED

DFI NAME
897 ACTION CODE, CRYPTOVARIABLE

DATA ITEM (CONTINUED) (CONTINUED)	BIT CODE	EXPLANATION
ACTION FOUR	4	TIME. ILLEGAL FOR J0.6C3 CONTINUATION WORD. USE CRYPTOVARIABLE LOGICAL LABEL, MSEC INITIALIZATION FOR VOICE A ONLY ON THE INDICATED NETS AT THE INDICATED TIME. ILLEGAL FOR J0.6C3 CONTINUATION WORD.
ACTION FIVE	5	USE CRYPTOVARIABLE LOGICAL LABEL, MSEC INITIALIZATION FOR VOICE B ONLY ON THE INDICATED NETS AT THE INDICATED TIME. ILLEGAL FOR J0.6C3 CONTINUATION WORD.
ACTION SIX	6	USE CRYPTOVARIABLE LOGICAL LABEL, MSEC INITIALIZATION FOR CONTROL ONLY ON THE INDICATED NETS AT THE INDICATED TIME. ILLEGAL FOR J0.6C3 CONTINUATION WORD.
ACTION SEVEN	7	USE CRYPTOVARIABLE LOGICAL LABEL, MSEC INITIALIZATION FOR VOICE A AND CONTROL ON THE INDICATED NETS AT THE INDICATED TIME. ILLEGAL FOR J0.6C3 CONTINUATION WORD.
ACTION EIGHT	8	USE CRYPTOVARIABLE LOGICAL LABEL, MSEC INITIALIZATION FOR VOICE B AND CONTROL ON THE INDICATED NETS AT THE INDICATED TIME. ILLEGAL FOR J0.6C3 CONTINUATION WORD.
ACTION NINE	9	USE CRYPTOVARIABLE LOGICAL LABEL, MSEC INITIALIZATION FOR VOICE A AND VOICE B ON THE INDICATED NETS AT THE INDICATED TIME. ILLEGAL FOR J0.6C3 CONTINUATION WORD.
UNDEFINED	10 THROUGH 15	

DFI NAME DEFINITION
898 VOICE FREQUENCY/CHANNEL INDICATOR INDICATES WHETHER THE VOICE FREQUENCY/CHANNEL IN THE MESSAGE IS THE PRIMARY OR THE ALTERNATE VOICE FREQUENCY/CHANNEL.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
001 VOICE FREQUENCY/CHANNEL INDICATOR [1 BIT] (VFC IND)	INDICATES WHETHER THE VOICE FREQUENCY/CHANNEL IN THE MESSAGE IS THE PRIMARY OR THE ALTERNATE VOICE FREQUENCY/CHANNEL.	J2.2C2 J2.5C1 J10.3C1	J2.3C2 J2.6C1 J12.4E0	J2.4C2 J9.0C1

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
PRIMARY VOICE FREQUENCY/CHANNEL	0	THE VOICE FREQUENCY/CHANNEL IS THE PRIMARY VOICE FREQUENCY/CHANNEL.
ALTERNATE VOICE FREQUENCY/CHANNEL	1	THE VOICE FREQUENCY/CHANNEL IS THE ALTERNATE VOICE FREQUENCY/CHANNEL.

B-628

MIL-STD-6016B
APPENDIX B

DFI NAME
1001 PROBABILITY OF KILL

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 PROBABILITY OF KILL [3 BIT] (PK)	PROBABILITY THE TN OBJECTIVE WILL BE DESTROYED. PROBABILITY OF KILL IS BASED ON TN SOURCE ENGAGEMENT.	J9.1I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
LESS THAN 50 PERCENT	1	
50 TO 69 PERCENT	2	
70 TO 79 PERCENT	3	
80 TO 84 PERCENT	4	
85 TO 89 PERCENT	5	
90 TO 94 PERCENT	6	
GREATER THAN 94 PERCENT	7	

DFI NAME
1050 METHOD OF FIRE

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
001 METHOD OF FIRE [3 BIT]	PROVIDES THE PLANNED MOF FOR ENGAGEMENT OF TN OBJECTIVE BY TN SOURCE.	J9.0C1	J9.1I	J12.0C2
DATA ITEM	BIT CODE	EXPLANATION		
----- FOR DUI 001 -----				
NO STATEMENT	0			
SINGLE SHOT	1	TARGET WILL BE ENGAGED WITH ONE SHOT.		
DUAL SHOT	2	TARGET WILL BE ENGAGED WITH TWO SHOTS.		
MULTIPLE SHOT	3	TARGET WILL BE ENGAGED WITH THREE OR MORE SHOTS.		
SHOOT-LOOK-SHOOT	4	TARGET WILL BE ENGAGED WITH ONE SHOT. IF ENGAGEMENT IS EVALUATED AS UNSUCCESSFUL, A SECOND SINGLE SHOT ENGAGEMENT IS INITIATED.		
UNDEFINED	5 THROUGH 7			

DFI NAME DEFINITION
1075 ACTION VALUE

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 ENGAGEMENT COORDINATION ACTION VALUE [4 BIT] (ECAV)	INDICATES THE USE OF THE APPLICABLE MESSAGE.	J9.1I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
INTEND TO ENGAGE	0	TN SOURCE INTENDS TO ENGAGE.
DO NOT INTEND TO ENGAGE	1	TN SOURCE WILL NOT ENGAGE.
AVAILABLE FOR SUPPORT	2	TN SOURCE CAN PROVIDE ENGAGEMENT SUPPORT.
NOT AVAILABLE FOR SUPPORT	3	TN SOURCE CANNOT PROVIDE ENGAGEMENT SUPPORT.
SUPPORT EXPECTED	4	TN SOURCE WILL ENGAGE THE TRACK NUMBER OBJECTIVE. CALCULATION OF METHOD OF FIRE ASSUMES TN ADDRESSEE SUPPORT.
SUPPORT NOT EXPECTED	5	TN SOURCE WILL ENGAGE THE TRACK NUMBER OBJECTIVE AND DOES NOT EXPECT TN ADDRESSEE ENGAGEMENT SUPPORT.
UNDEFINED	6 THROUGH 15	

B-631

MIL-STD-6016B
APPENDIX B

DFI NAME
1103 ABSOLUTE VALUE

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 12 [10 BIT]	ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 12.	
002 ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 13 [10 BIT]	ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 13.	
003 ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 14 [10 BIT]	ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 14.	
004 ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 15 [10 BIT]	ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 15.	
005 ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 16 [10 BIT]	ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 16.	
006 ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 23 [10 BIT]	ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 23.	J3.6C1
007 ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 24 [10 BIT]	ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 24.	J3.6C2
008 ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 25 [10 BIT]	ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 25.	J3.6C3
009 ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 26 [10 BIT]	ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 26.	J3.6C4
010 ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 34 [10 BIT]	ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 34.	J3.6C2

DFI NAME
1103 ABSOLUTE VALUE

DUI NAME	EXPLANATION	APPLICABILITY
011 ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 35 [10 BIT]	ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 35.	J3.6C3
012 ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 36 [10 BIT]	ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 36.	J3.6C4
013 ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 45 [10 BIT]	ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 45.	J3.6C3
014 ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 46 [10 BIT]	ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 46.	J3.6C4
015 ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 56 [10 BIT]	ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT 56.	J3.6C4
016 ABSOLUTE VALUE OF VELOCITY COVARIANCE DATA ELEMENT 23 [10 BIT]	ABSOLUTE VALUE OF VELOCITY COVARIANCE DATA ELEMENT 23.	J3.6C5

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001-015 -----		
0 THROUGH 1	0 THROUGH 1023	ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT IN 1/1023 INCREMENTS.
----- FOR DUI 016 -----		
0 THROUGH 1	0 THROUGH 1023	ABSOLUTE VALUE OF VELOCITY COVARIANCE DATA ELEMENT IN 1/1023 INCREMENTS.

DFI NAME DEFINITION
1104 ACCELERATION

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 BALLISTIC MISSILE ACCELERATION [18 BIT]	THIS FIELD IS ONLY INTERPRETED WHEN BOOST INDICATOR IS SET TO VALUE 1, BOOST.	J3.6C3

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
TBD	1 THROUGH 262143	

DFI NAME DEFINITION
1105 BETA EXPRESSES MEASURED DRAG EFFECT.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME EXPLANATION APPLICABILITY

001 BALLISTIC MISSILE BETA J3.6C3
[18 BIT]
THIS FIELD IS ONLY INTERPRETED WHEN
BOOST INDICATOR FIELD IS SET TO
VALUE 0, NOT IN BOOST. EXPRESSES
MEASURED ATMOSPHERIC DRAG EFFECTS
ON A BALLISTIC MISSILE WITH A
CONSTANT REFERENCE AREA. BETA IS
DEFINED AS THE MASS OF THE OBJECT
DIVIDED BY THE PRODUCT OF ITS
COEFFICIENT OF DRAG AND REFERENCE
AREA.

DATA ITEM BIT CODE EXPLANATION

----- FOR DUI 001 -----
NO STATEMENT 0
0 THROUGH 3,145.692 MASS 1 THROUGH 262142 IN 0.012 MASS POUNDS PER SQUARE FEET
POUNDS PER SQUARE FEET INCREMENTS.
>3,145.692 MASS POUNDS 262143
PER SQUARE FEET

B-635

MIL-STD-6016B
APPENDIX B

DFI	NAME	DEFINITION
1106	COVARIANCE DATA ELEMENT	THE COVARIANCE DATA ELEMENTS ARE USED ALONG WITH ROOT VARIANCE DATA TO CONSTRUCT THE COVARIANCE MATRIX, WHICH DESCRIBES THE UNCERTAINTIES ASSOCIATED WITH A TRACK MESSAGE. THE COVARIANCE DATA ELEMENTS REPRESENT THE ELEMENTS OF THE CHOLESKY DECOMPOSITION OF THE PRECOMPENSATED CORRELATION MATRIX. NOTE: COVARIANCE DATA ELEMENTS 11 THROUGH 16 ARE NOT SENT. COVARIANCE DATA ELEMENT 11 IS ALWAYS EQUAL TO 1.0. THE RECIPIENT OF THE MESSAGE IS REQUIRED TO SOLVE FOR COVARIANCE DATA ELEMENTS 12 THROUGH 16 BY USING THE DEFINITION OF THE CORRELATION MATRIX AND THE SIGNS OF COVARIANCE DATA ELEMENTS 12 THROUGH 16 WHICH ARE PROVIDED IN THE MESSAGE.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 COVARIANCE DATA ELEMENT 11 [10 BIT]	REPRESENTS THE ELEMENT OCCUPYING ROW 1, COLUMN 1 OF THE COVARIANCE DATA MATRIX.	
002 COVARIANCE DATA ELEMENT 22 [10 BIT]	REPRESENTS THE ELEMENT OCCUPYING ROW 2, COLUMN 2 OF THE COVARIANCE DATA MATRIX.	J3.6C1
003 COVARIANCE DATA ELEMENT 33 [10 BIT]	REPRESENTS THE ELEMENT OCCUPYING ROW 3, COLUMN 3 OF THE COVARIANCE DATA MATRIX.	J3.6C1
004 COVARIANCE DATA ELEMENT 44 [10 BIT]	REPRESENTS THE ELEMENT OCCUPYING ROW 4, COLUMN 4 OF THE COVARIANCE DATA MATRIX.	J3.6C2
005 COVARIANCE DATA ELEMENT 55 [10 BIT]	REPRESENTS THE ELEMENT OCCUPYING ROW 5, COLUMN 5 OF THE COVARIANCE DATA MATRIX.	J3.6C3
006 COVARIANCE DATA ELEMENT 66 [10 BIT]	REPRESENTS THE ELEMENT OCCUPYING ROW 6, COLUMN 6 OF THE COVARIANCE DATA MATRIX.	J3.6C4

DFI NAME
1106 COVARIANCE DATA ELEMENT

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001-006 -----		
0 THROUGH 1	0 THROUGH 1023	ABSOLUTE VALUE OF COVARIANCE DATA ELEMENT IN INCREMENTS OF 1/1023.

DFI NAME
1107 INDICATOR

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 COVARIANCE INDICATOR [1 BIT] (COV IND)	SPECIFIES WHETHER COVARIANCE DATA ARE REQUESTED. USED IN CONJUNCTION WITH THE NUMBER/ FREQUENCY OF UPDATES FIELD.	J7.1I
002 LOST TRACK INDICATOR [1 BIT] (LT IND)	INDICATES WHETHER THE TRACK IS LOST OR CURRENTLY BEING TRACKED.	J3.6E1
003 BOOST INDICATOR [1 BIT] (BST IND)	SPECIFIES WHETHER A BALLISTIC MISSILE IS IN THE BOOST STAGE.	J3.6E1
004 CONNECT/DISCONNECT [1 BIT] (C/D)	INDICATES THE RELATIONSHIP OF A LAUNCH OR IMPACT POINT TO A REPORTED BALLISTIC MISSILE.	J3.0C5
005 DATA INDICATOR [3 BIT]	SPECIFIES THE DESCRIPTIVE DATA TO FOLLOW, IF ANY.	J3.6E1

DATA ITEM

BIT CODE

EXPLANATION

----- FOR DUI 001 -----

NO COVARIANCE

0

NO COVARIANCE DATA ARE REQUESTED
FROM THE ADDRESSEE TN ON THE
REFERENCE TN.

COVARIANCE REQUEST

1

COVARIANCE DATA ARE REQUESTED FROM
THE ADDRESSEE TN ON THE REFERENCE
TN.

----- FOR DUI 002 -----

TRACKING

0

LOST TRACK

1

INDICATES THE TRACK HAS BEEN LOST
AND MESSAGE CONTAINS THE LAST
MEASURED DATA.

DFI NAME
1107 INDICATOR

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
----- FOR DUI 003 -----		
NOT IN BOOST	0	
BOOST	1	
----- FOR DUI 004 -----		
CONNECT	0	THE LAUNCH OR IMPACT POINT IS RELATED TO THE RELATED 2 TN FIELD.
DISCONNECT	1	THE LAUNCH OR IMPACT POINT IS NO LONGER RELATED TO THE RELATED 2 TN FIELD.
----- FOR DUI 005 -----		
NO STATEMENT	0	
STATE VECTOR ONLY	1	ONLY STATE VECTOR TRANSMITTED. NOT DESCRIPTIVE DATA.
PARTIAL COVARIANCE	2	PARTIAL COVARIANCE DATA FOLLOWS.
FULL COVARIANCE	3	FULL COVARIANCE DATA FOLLOWS.
UNDEFINED	4 THROUGH 7	

DFI	NAME	DEFINITION
1108	POSITION, WGS-84	THE X, Y, Z POSITION IN EARTH-CENTERED, EARTH-FIXED CARTESIAN COORDINATES AS DEFINED IN THE WORLD GEODETIC SYSTEM-84 (WGS-84).

DATA STANDARD USAGE: Link 16	STATUS:
------------------------------	---------

DUI NAME	EXPLANATION	APPLICABILITY
001 X POSITION IN WGS-84 [23 BIT]	X POSITION IN EARTH-CENTERED, EARTH-FIXED CARTESIAN COORDINATES AS DEFINED BY WGS-84.	J3.6E0
002 Y POSITION IN WGS-84 [23 BIT]	Y POSITION IN EARTH-CENTERED, EARTH-FIXED CARTESIAN COORDINATES AS DEFINED BY WGS-84.	J3.6E0
003 Z POSITION IN WGS-84 [23 BIT]	Z POSITION IN EARTH-CENTERED, EARTH-FIXED CARTESIAN COORDINATES AS DEFINED BY WGS-84.	J3.6E1

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001-003 -----		
0 THROUGH 41,943,030 FEET	0 THROUGH 4194303	IN 10 FOOT INCREMENTS.
NO STATEMENT	4194304	
-41,943,030 THROUGH -10 FEET	4194305 THROUGH 8388607	IN 10 FOOT INCREMENTS.

DFI NAME
1109 ROOT VARIANCE

DEFINITION
ROOT VARIANCE ELEMENTS ARE USED ALONG WITH THE COVARIANCE DATA ELEMENTS TO CONSTRUCT THE COVARIANCE MATRIX, WHICH DESCRIBES THE UNCERTAINTIES ASSOCIATED WITH A TRACK. ROOT VARIANCE ELEMENTS ARE ALSO USED ALONG WITH THE VELOCITY COVARIANCE DATA ELEMENTS TO CONSTRUCT THE VELOCITY COVARIANCE SUBMATRIX. THE ROOT VARIANCES ARE DEFINED AS THE SQUARE ROOTS OF THE DIAGONAL ELEMENTS OF THE COVARIANCE MATRIX. ALL ROOT VARIANCE ELEMENTS ARE EXPRESSED IN THE EARTH CENTERED FIXED (ECF) WGS-84 COORDINATE SYSTEM.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY	
001 SIGMA X POSITION [10 BIT]	REPRESENTS THE SQUARE ROOT OF THE VARIANCE OF THE ERROR IN THE X AXIS POSITION STATE VECTOR EXPRESSED IN THE ECF WGS-84 COORDINATE SYSTEM.	J3.6C1	
002 SIGMA Y POSITION [10 BIT]	REPRESENTS THE SQUARE ROOT OF THE VARIANCE OF THE ERROR IN THE Y AXIS POSITION STATE VECTOR EXPRESSED IN THE ECF WGS-84 COORDINATE SYSTEM.	J3.6C1	
003 SIGMA Z POSITION [10 BIT]	REPRESENTS THE SQUARE ROOT OF THE VARIANCE OF THE ERROR IN THE Z AXIS POSITION STATE VECTOR EXPRESSED IN THE ECF WGS-84 COORDINATE SYSTEM.	J3.6C1	
004 SIGMA X VELOCITY [10 BIT]	REPRESENTS THE SQUARE ROOT OF THE VARIANCE OF THE ERROR IN THE X AXIS VELOCITY STATE VECTOR EXPRESSED IN THE ECF WGS-84 COORDINATE SYSTEM.	J3.6C2	J3.6C5
005 SIGMA Y VELOCITY [10 BIT]	REPRESENTS THE SQUARE ROOT OF THE VARIANCE OF THE ERROR IN THE Y AXIS VELOCITY STATE VECTOR EXPRESSED IN THE ECF WGS-84 COORDINATE SYSTEM.	J3.6C2	J3.6C5
006 SIGMA Z VELOCITY [10 BIT]	REPRESENTS THE SQUARE ROOT OF THE VARIANCE OF THE ERROR IN THE Z AXIS VELOCITY STATE VECTOR EXPRESSED IN THE ECF WGS-84 COORDINATE SYSTEM.	J3.6C2	J3.6C5

DFI NAME
1109 ROOT VARIANCE

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001-003 -----		
1 THROUGH 1,000,000 FEET	0 THROUGH 1022	IN LOGARITHMIC INCREMENTS FROM 1 FOOT THROUGH 1,000,000 FEET ACCORDING TO THE FORMULA TRUNCATE (ALPHA TIMES LN (SIGMA SUB X OVER 1.0 FEET) PLUS 0.5), WHERE LN IS THE NATURAL LOGARITHM AND ALPHA EQUALS 1022 OVER LN (TEN TO THE SIXTH POWER).
NO STATEMENT	1023	
----- FOR DUIS 004-006 -----		
1 THROUGH 1,312,336 FT/ SEC	0 THROUGH 1022	IN LOGARITHMIC INCREMENTS FROM 1 FT/SEC THROUGH 1,312,336 FT/SEC ACCORDING TO THE FORMULA TRUNCATE (ALPHA TIMES LN (SIGMA SUB X OVER 1.0 FT PER SEC) PLUS 0.5), WHERE LN IS THE NATURAL LOGARITHM AND ALPHA EQUALS 1022 OVER LN (1,312,336).
NO STATEMENT	1023	

MIL-STD-6016B
APPENDIX B

B-642

DFI NAME
1110 SIGN

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 SIGN OF COVARIANCE DATA ELEMENT 12 [1 BIT] (SGN COV 12)	SIGN OF THE COVARIANCE DATA ELEMENT 12.	J3.6C1
002 SIGN OF COVARIANCE DATA ELEMENT 13 [1 BIT] (SGN COV 13)	SIGN OF THE COVARIANCE DATA ELEMENT 13.	J3.6C1
003 SIGN OF COVARIANCE DATA ELEMENT 14 [1 BIT] (SGN COV 14)	SIGN OF THE COVARIANCE DATA ELEMENT 14.	J3.6C2
004 SIGN OF COVARIANCE DATA ELEMENT 15 [1 BIT] (SGN COV 15)	SIGN OF THE COVARIANCE DATA ELEMENT 15.	J3.6C3
005 SIGN OF COVARIANCE DATA ELEMENT 16 [1 BIT] (SGN COV 16)	SIGN OF THE COVARIANCE DATA ELEMENT 16.	J3.6C4
006 SIGN OF COVARIANCE DATA ELEMENT 23 [1 BIT] (SGN COV 23)	SIGN OF THE COVARIANCE DATA ELEMENT 23.	J3.6C1
007 SIGN OF COVARIANCE DATA ELEMENT 24 [1 BIT] (SGN COV 24)	SIGN OF THE COVARIANCE DATA ELEMENT 24.	J3.6C2
008 SIGN OF COVARIANCE DATA ELEMENT 25 [1 BIT] (SGN COV 25)	SIGN OF THE COVARIANCE DATA ELEMENT 25.	J3.6C3
009 SIGN OF COVARIANCE DATA ELEMENT 26 [1 BIT] (SGN COV 26)	SIGN OF THE COVARIANCE DATA ELEMENT 26.	J3.6C4
010 SIGN OF COVARIANCE DATA ELEMENT 34 [1 BIT] (SGN COV 34)	SIGN OF THE COVARIANCE DATA ELEMENT 34.	J3.6C2

DFI NAME
1110 SIGN

DUI NAME	EXPLANATION	APPLICABILITY
011 SIGN OF COVARIANCE DATA ELEMENT 35 [1 BIT] (SGN COV 35)	SIGN OF THE COVARIANCE DATA ELEMENT 35.	J3.6C3
012 SIGN OF COVARIANCE DATA ELEMENT 36 [1 BIT] (SGN COV 36)	SIGN OF THE COVARIANCE DATA ELEMENT 36.	J3.6C4
013 SIGN OF COVARIANCE DATA ELEMENT 45 [1 BIT] (SGN COV 45)	SIGN OF THE COVARIANCE DATA ELEMENT 45.	J3.6C3
014 SIGN OF COVARIANCE DATA ELEMENT 46 [1 BIT] (SGN COV 46)	SIGN OF THE COVARIANCE DATA ELEMENT 46.	J3.6C4
015 SIGN OF COVARIANCE DATA ELEMENT 56 [1 BIT] (SGN COV 56)	SIGN OF THE COVARIANCE DATA ELEMENT 56.	J3.6C4
016 SIGN OF VELOCITY COVARIANCE DATA ELEMENT 12 [1 BIT] (SGN VEL C12)	SIGN OF THE VELOCITY COVARIANCE DATA ELEMENT 12.	J3.6C5
017 SIGN OF VELOCITY COVARIANCE DATA ELEMENT 13 [1 BIT] (SGN VEL C13)	SIGN OF THE VELOCITY COVARIANCE DATA ELEMENT 13.	J3.6C5
018 SIGN OF VELOCITY COVARIANCE DATA ELEMENT 23 [1 BIT] (SGN VEL C23)	SIGN OF THE VELOCITY COVARIANCE DATA ELEMENT 23.	J3.6C5

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001-018 -----		
POSITIVE	0	
NEGATIVE	1	

DFI NAME
1111 UPDATE

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 NUMBER/FREQUENCY OF UPDATES [3 BIT]	SPECIFIES THE NUMBER AND FREQUENCY OF UPDATES REQUESTED ON REFERENCE TN. USED IN CONJUNCTION WITH THE COVARIANCE INDICATOR.	J7.1I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
1 UPDATE	1	ADDRESSEE TN IS REQUESTED TO SEND 1 UPDATE.
2 UPDATES AT 4 SECOND INTERVALS	2	ADDRESSEE TN IS REQUESTED TO SEND 2 UPDATES AT THE GREATER OF SENSOR RATE OR 4 SECOND INTERVALS.
2 UPDATES AT 2 SECOND INTERVALS	3	ADDRESSEE TN IS REQUESTED TO SEND 2 UPDATES AT THE GREATER OF SENSOR RATE OR 2 SECOND INTERVALS.
UNDEFINED	4 THROUGH 7	

DFI	NAME	DEFINITION
1112	VELOCITY COVARIANCE DATA ELEMENT	THE VELOCITY COVARIANCE DATA ELEMENTS ARE USED ALONG WITH ROOT VARIANCE DATA TO CONSTRUCT THE VELOCITY COVARIANCE SUBMATRIX. THE VELOCITY COVARIANCE DATA ELEMENTS ARE THE ELEMENTS OF THE CHOLESKY DECOMPOSITION OF THE PRECOMPENSATED VELOCITY CORRELATION SUBMATRIX. NOTE: VELOCITY COVARIANCE DATA ELEMENTS 11 THROUGH 13 ARE NOT SENT. COVARIANCE DATA ELEMENT 11 IS ALWAYS EQUAL TO 1.0. THE RECIPIENT OF THE MESSAGE IS REQUIRED TO SOLVE FOR VELOCITY COVARIANCE DATA ELEMENTS 12 AND 13 BY USING THE DEFINITION OF THE VELOCITY CORRELATION SUBMATRIX AND THE SIGNS OF VELOCITY COVARIANCE DATA ELEMENTS 12 AND 13 WHICH ARE PROVIDED IN THE MESSAGE.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 VELOCITY COVARIANCE DATA ELEMENT 11 [10 BIT]	REPRESENTS THE ELEMENT OCCUPYING ROW 1, COLUMN 1 OF THE VELOCITY COVARIANCE DATA MATRIX.	
002 VELOCITY COVARIANCE DATA ELEMENT 12 [10 BIT]	REPRESENTS THE ELEMENT OCCUPYING ROW 1, COLUMN 2 OF THE VELOCITY COVARIANCE DATA MATRIX.	
003 VELOCITY COVARIANCE DATA ELEMENT 13 [10 BIT]	REPRESENTS THE ELEMENT OCCUPYING ROW 1, COLUMN 3 OF THE VELOCITY COVARIANCE DATA MATRIX.	
004 VELOCITY COVARIANCE DATA ELEMENT 22 [10 BIT]	REPRESENTS THE ELEMENT OCCUPYING ROW 2, COLUMN 2 OF THE VELOCITY COVARIANCE DATA MATRIX.	J3.6C5
005 VELOCITY COVARIANCE DATA ELEMENT 23 [10 BIT]	REPRESENTS THE ELEMENT OCCUPYING ROW 2, COLUMN 3 OF THE VELOCITY COVARIANCE DATA MATRIX.	
006 VELOCITY COVARIANCE DATA ELEMENT 33 [10 BIT]	REPRESENTS THE ELEMENT OCCUPYING ROW 3, COLUMN 3 OF THE VELOCITY COVARIANCE DATA MATRIX.	J3.6C5

DFI NAME
1112 VELOCITY COVARIANCE DATA
ELEMENT

DATA ITEM

BIT CODE

EXPLANATION

----- FOR DUIS 001-006 -----

0 THROUGH 1

0 THROUGH 1023

ABSOLUTE VALUE OF VELOCITY
COVARIANCE DATA ELEMENT IN
INCREMENTS OF 1/1023.

DFI NAME DEFINITION
1113 VELOCITY, WGS-84 THE RATE OF CHANGE OF POSITION ALONG A DESIGNATED AXIS.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 X VELOCITY IN WGS-84 [14 BIT]	THE RATE OF CHANGE OF POSITION ALONG THE X AXIS (WGS-84 REFERENCE FRAME).	J3.6E0
002 Y VELOCITY IN WGS-84 [14 BIT]	THE RATE OF CHANGE OF POSITION ALONG THE Y AXIS (WGS-84 REFERENCE FRAME).	J3.6E1
003 Z VELOCITY IN WGS-84 [14 BIT]	THE RATE OF CHANGE OF POSITION ALONG THE Z AXIS (WGS-84 REFERENCE FRAME).	J3.6E1

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001-003 -----		
0 THROUGH 27,276.03 FT/ SEC	0 THROUGH 8191	IN 3.33 FEET/SEC INCREMENTS.
NO STATEMENT	8192	
-27,276.03 THROUGH -3.33 FT/SEC	8193 THROUGH 16383	

APPENDIX B

DFI NAME DEFINITION
1120 VARIANCE EXPRESSES THE VARIANCE IN A CARTESIAN REFERENTIAL.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 VARIANCE XX [8 BIT]	VARIANCE IN RELATION TO X AXIS	J12.6C7
002 VARIANCE YY [8 BIT]	VARIANCE IN RELATION TO Y AXIS	J12.6C7
003 VARIANCE ZZ [8 BIT]	VARIANCE IN RELATION TO Z AXIS	J12.6C7
004 VARIANCE XY [9 BIT]	VARIANCE IN RELATION TO X AND Y AXES	J12.6C7
005 VARIANCE XZ [9 BIT]	VARIANCE IN RELATION TO X AND Z AXES	J12.6C7
006 VARIANCE YZ [9 BIT]	VARIANCE IN RELATION TO Y AND Z AXES	J12.6C7

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001-003 -----		
NUMERIC	0 THROUGH 254	0 M**2 THROUGH 2294*10**6 M**2 WITH A LOGARITHMIC CODING
NO STATEMENT	255	
----- FOR DUIS 004-006 -----		
NUMERIC	0 THROUGH 254	0 M**2 THROUGH 2294*10**6 M**2 WITH A LOGARITHMIC CODING
ILLEGAL	255	
NUMERIC	256 THROUGH 510	0 M**2 THROUGH -2294*10**6 M**2 WITH A LOGARITHMIC CODING
NO STATEMENT	511	

DFI NAME
1203 FREQUENCY AGILITY

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
----------	-------------	---------------

001 FREQUENCY AGILITY INDICATOR [2 BIT] (FREQ AGIL IND)	INDICATES THE SENSOR'S RADAR IS IN THE FREQUENCY AGILITY MODE OR THE COMMANDED MODE.	J12.6C6
--	--	---------

DATA ITEM	BIT CODE	EXPLANATION
-----------	----------	-------------

----- FOR DUI 001 -----

FIXED FREQUENCY MODE	0	INDICATES FIXED FREQUENCY MODE IS ENABLED IN THE SENDER'S RADAR IF THE SENSOR STATUS/COMMAND INDICATOR FIELD IS SET TO 0. IF THE SENSOR STATUS/COMMAND INDICATOR FIELD IS SET TO 1, THEN THIS IS THE COMMANDED MODE OF OPERATION FROM THE SENDER.
FREQUENCY AGILE MODE	1	INDICATES FREQUENCY AGILE MODE IS ENABLED IN THE SENDER'S RADAR IF THE SENSOR STATUS/COMMAND INDICATOR FIELD IS SET TO 0. IF THE SENSOR STATUS/COMMAND INDICATOR FIELD IS SET TO 1, THEN THIS IS THE COMMANDED MODE OF OPERATION FROM THE SENDER.

UNDEFINED	2 THROUGH 3	
-----------	-------------	--

DFI NAME DEFINITION
1204 PDI PULSE DOPPLER ILLUMINATION.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
----------	-------------	---------------

001 PDI INDICATOR [1 BIT] (PDI IND)	INDICATES PDI/MISSILE DATA LINK CHANNEL FIELD CONTAINS PDI CHANNEL DATA.	J12.6C6
--	--	---------

002 PDI/MISSILE DATA LINK CHANNEL [9 BIT]	RADAR CHANNEL SELECTED FOR PDI.	J12.6C6
--	---------------------------------	---------

DATA ITEM	BIT CODE	EXPLANATION
-----------	----------	-------------

----- FOR DUI 001 -----

MISSILE DATA LINK CHANNEL REPORTED	0	INDICATES THAT THE PDI/MISSILE DATA LINK CHANNEL FIELD CONTAINS MISSILE DATA LINK CHANNEL DATA.
PDI CHANNEL REPORTED	1	INDICATES THAT THE PDI/MISSILE DATA LINK CHANNEL CONTAINS PDI CHANNEL DATA.

----- FOR DUI 002 -----

NO STATEMENT CHANNEL 1 THROUGH 511	0 1 THROUGH 511	DEFINES THE RADAR CHANNEL SELECTED FOR PULSE DOPPLER ILLUMINATION OR AIR-TO-AIR MISSILE DATA LINK.
---------------------------------------	--------------------	--

DFI	NAME	DEFINITION	
1206	DATA LINK		
DATA STANDARD USAGE: Link 16		STATUS:	
DUI NAME	EXPLANATION	APPLICABILITY	
001 AIR-GROUND WEAPON DATA LINK CHANNEL [5 BIT]	DEFINES THE AIR-GROUND WEAPON DATA LINK CHANNEL SELECTED.	J12.6C6	
DATA ITEM	BIT CODE	EXPLANATION	
----- FOR DUI 001 -----			
NO STATEMENT CHANNEL 1 THROUGH 31	0 1 THROUGH 31	DEFINES THE A/G WEAPON DATA LINK CHANNEL SELECTED FOR USE AGAINST THE TARGET.	

DFI NAME
1207 ARM

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 ARM THREAT NUMBER [8 BIT]	PROVIDES A WEAPON-UNIQUE THREAT NUMBER ASSIGNED TO A TARGET.	J12.6C6
002 ARM TYPE [4 BIT]	INDICATES THE TYPE OF ARM THREAT NUMBER IN THE ARM THREAT NUMBER FIELD.	J12.6C6

DATA ITEM	BIT CODE	EXPLANATION
-----------	----------	-------------

----- FOR DUI 001 -----

NO STATEMENT	0	
THREAT NUMBER 1 THROUGH 255	1 THROUGH 255	PROVIDES THE ARM-SPECIFIC THREAT NUMBER ASSOCIATED WITH THE TARGET. THE TYPE OF THREAT CORRESPONDS TO EACH THREAT NUMBER WHICH IS DEPENDENT UPON THE ARM TYPE AND MAY BE PREBRIEFED PRIOR TO THE MISSION.

----- FOR DUI 002 -----

NO STATEMENT	0
AGM 88	1
AGM 45	2
UNDEFINED	3 THROUGH 15

DFI NAME
1301 FUSION TYPE

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 FUSION TYPE [1 BIT] (FT)	INDICATES THE TYPE OF FUSION USED TO PRODUCE REPORTED SENSOR INFORMATION.	J12.6C2 J12.7I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
SENSOR FUSION	0	INDICATES THAT SENSOR DATA REPORT IS A RESULT OF INFORMATION FROM ONBOARD SENSORS.
DATA FUSION	1	INDICATES THAT SENSOR DATA REPORT IS A RESULT OF INFORMATION FROM ONBOARD SENSORS COMBINED WITH THAT RECEIVED FROM REMOTE SOURCES.

DFI NAME DEFINITION
1351 SENSOR TARGET REPORTING STATUS

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 SENSOR TARGET REPORTING STATUS [1 BIT] (STR STS)	EXPRESSES SENSOR TARGET REPORTING STATUS.	J13.2C1

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
REPORTING ALL	0	AIRCRAFT IS REPORTING ALL LOCALLY DERIVED TARGETS ON THE CONTROL NPG.
NOT REPORTING ALL	1	AIRCRAFT IS NOT REPORTING ALL LOCALLY DERIVED TARGETS ON THE CONTROL NPG. ENGAGEMENT STATUS REPORTING IS NOT INHIBITED.

B-655

MIL-STD-6016B
APPENDIX B

APPENDIX B

DFI NAME DEFINITION
1401 VELOCITY. PROVIDES VELOCITY COMPONENTS

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 OBSERVER VELOCITY NORTH [12 BIT]	PROVIDES THE TARGET OBSERVER'S VELOCITY ALONG THE LOCAL NORTH AXIS, DEFINED AT THE LATITUDE AND LONGITUDE IN THE J12.7I WORD.	J12.7C1
002 OBSERVER VELOCITY EAST [12 BIT]	PROVIDES THE TARGET OBSERVER'S VELOCITY ALONG THE LOCAL EAST AXIS, DEFINED AT THE LATITUDE AND LONGITUDE IN THE J12.7I WORD.	J12.7C1
003 OBSERVER VELOCITY DOWN [12 BIT]	PROVIDES THE TARGET OBSERVER'S VELOCITY ALONG THE LOCAL DOWN AXIS, DEFINED AT THE LATITUDE AND LONGITUDE IN THE J12.7I WORD.	J12.7C3
006 VELOCITY, DOWN [13 BIT]	PROVIDES THE DOWN COMPONENT OF THE TARGET'S VELOCITY REFERENCED TO THE HORIZON. BELOW THE HORIZON IS POSITIVE.	J12.6C3

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001-003 -----		
0 THROUGH 2047 FEET PER SECOND	0 THROUGH 2047	IN 1 FT/SEC INCREMENTS.
NO STATEMENT	2048	
-2047 THROUGH -1 FEET PER SECOND	2049 THROUGH 4095	IN 1 FT/SEC INCREMENTS.
----- FOR DUI 006 -----		
0 THROUGH 4095 FEET PER SECOND	0 THROUGH 4095	IN 1 FT/SEC INCREMENTS.
NO STATEMENT	4096	
-4095 THROUGH -1 FEET PER SECOND	4097 THROUGH 8191	IN 1 FT/SEC INCREMENTS.

DFI NAME DEFINITION
1502 AGILE EMITTER

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 AGILE EMITTER [1 BIT] (AG EMT)		J14.0I

DATA ITEM	BIT CODE	EXPLANATION
-----------	----------	-------------

----- FOR DUI 001 -----

NO STATEMENT	0	
AGILE EMITTER	1	THE REPORTED PARAMETRIC INFORMATION IS AN ADDITIONAL SET OF DATA WHICH IS IDENTIFIED AS EMANATING FROM THE SAME EMITTER AS THE INFORMATION PREVIOUSLY REPORTED.

DFI NAME
1520 FILTER UNIT TYPE

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME

EXPLANATION

APPLICABILITY

001 FILTER UNIT TYPE
[3 BIT]

INDICATES WHETHER THE REQUESTED OR
REPORTED FILTER APPLIES TO AN
INDIVIDUAL UNIT OR FORWARDED DATA.

J7.6I

DATA ITEM

BIT CODE

EXPLANATION

----- FOR DUI 001 -----

INDIVIDUAL UNIT
FJUA

0
1

FILTER(ING) OWN UNIT REPORTS.
FILTER(ING) REPORTS FORWARDED FROM
LINK 16 TO LINK 11.

FJUB

2

FILTER(ING) REPORTS FORWARDED FROM
LINK 16 TO LINK 11B.

FJUAB

3

FILTER(ING) REPORTS FORWARDED FROM
LINK 16 TO LINK 11 AND LINK 11B.

UNDEFINED

4 THROUGH 7

DFI NAME DEFINITION
1539 EPOCH NUMBER AN INTEGER USED TO DESIGNATE A PARTICULAR EPOCH, ASSIGNED SEQUENTIALLY FROM 0 THROUGH 112.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 EPOCH NUMBER, EXECUTION [7 BIT]	SPECIFIES THE EPOCH AT WHICH THE TIME CHANGE SHALL BE MADE.	J0.2I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
EPOCH NUMBER	0 THROUGH 112	IN 1 NUMBER INCREMENTS.
ILLEGAL	113 THROUGH 127	

DFI NAME DEFINITION
1540 PATH QUALITY DESCRIBES PATH MONITORING AND NUMBER OF MISSED MESSAGES.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 PATH QUALITY MONITORING [2 BIT] (PQL MON)	DESCRIBES THE TYPE OF PATH MONITOR TO BE USED.	J1.6I
002 PATH QUALITY THRESHOLD, 1 [3 BIT] (PQL TH1)	DESCRIBES NUMBER OF SUCCESSIVE MISSED MESSAGES PRIOR TO REPORTING A PATH PROBLEM.	J1.6I
003 PATH QUALITY THRESHOLD, 2 [4 BIT]	DESCRIBES NUMBER OF SUCCESSIVE MISSED MESSAGES PRIOR TO REPORTING A PATH FAILURE.	J1.6I

DATA ITEM	BIT CODE	EXPLANATION
-----------	----------	-------------

----- FOR DUI 001 -----

NO PATH MONITORING	0
1-WAY PATH MONITORING	1
2-WAY PATH MONITORING	2
UNDEFINED	3

----- FOR DUI 002 -----

NO STATEMENT	0	USE DEFAULT VALUE.
NUMBER OF MISSED MESSAGES	1 THROUGH 7	

----- FOR DUI 003 -----

NO STATEMENT	0
NUMBER OF MISSED MESSAGES	1 THROUGH 15

DFI NAME DEFINITION
1541 MESSAGES RECEIVED INDICATOR INDICATES WHETHER OF NOT A MESSAGE WAS RECEIVED FROM THE CONTROLLING NCU SINCE THE LAST REPORT.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 MESSAGE RECEIVED INDICATOR [1 BIT] (MRI)	INDICATES WHETHER OR NOT A MESSAGE WAS RECEIVED FROM THE CONTROLLING NCS SINCE THE LAST REPORT (J1.4).	J1.4I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO MESSAGE RECEIVED	0	NO MESSAGE RECEIVED OR MESSAGE RECEIVED BUT UNINTELLIGIBLE.
MESSAGE CORRECTLY RECEIVED	1	

DFI NAME DEFINITION
1542 NET CONTROL NUMBER USED TO VERIFY SEQUENTIAL RECEPTION OF NET CONTROL MESSAGES.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 NET CONTROL MESSAGE SEQUENCE NUMBER [1 BIT] (NC MSN)	THE VALUE IN THIS FIELD ALTERNATES AS COMMANDS ARRIVE. THIS COULD BE INTERPRETED AS THE PARITY OF THE COMMAND NUMBER (I.E. ON THE FIRST, THIRD, FIFTH, ETC. COMMANDS THIS FIELD WOULD BE SET TO 1, ON THE SECOND, FOURTH, SIXTH, ETC. IT WOULD BE SET TO 0).	J1.4I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
PARITY NUMBER	0 THROUGH 1	

DFI NAME DEFINITION
1543 REPORT FORMAT IDENTIFIES THE SET OF COMMUNICANTS BEING REPORTED.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 REPORT FORMAT INDICATOR [2 BIT] (RFI)	INDICATES WORD REPORTS ON THE STATUS OF THE FIRST, SECOND, THIRD, AND FOURTH 32 COMMUNICANTS.	J1.4E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
FIRST 32 COMMUNICANTS	0	
SECOND 32 COMMUNICANTS	1	
THIRD 32 COMMUNICANTS	2	
FOURTH 32 COMMUNICANTS	3	

DFI NAME
1544 TIMEOUT INTERVAL

DEFINITION
THE NUMBER OF 6 SECOND REPORTING INTERVALS THAT MUST PASS, IN WHICH A TERMINAL RECEIVES NO MESSAGE FROM ITS CONTROLLING NCU, BEFORE A TERMINAL WILL CONSIDER ITS NCU TO HAVE FAILED AND WILL ATTEMPT CONTROL NET ENTRY.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 TIMEOUT INTERVAL [5 BIT]	THE NUMBER OF 6 SECOND INTERVALS THAT MUST PASS IN WHICH A TERMINAL RECEIVES NO MESSAGE FROM ITS' CONTROLLING NCS BEFORE A TERMINAL WILL CONSIDER ITS' NCS TO HAVE FAILED AND WILL ATTEMPT CONTROL NET ENTRY.	J1.5I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NUMERIC	0 THROUGH 30	
NO STATEMENT	31	

DFI NAME DEFINITION
1545 LANDING APPROACH CONDITION DESCRIBES THE LANDING AND APPROACH CONDITIONS RELATING TO THE SHIPS FLIGHT DECK.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 LANDING APPROACH CONDITION [3 BIT]	DESCRIBES THE METEOROLOGICAL CONDITION OF THE APPROACH AND RECOVERY ROUTE TO THE AIRCRAFT CARRIER.	J13.0I J13.3I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
CV RECOVERY CASE I	1	THE APPROACH AND RECOVERY ROUTE TO THE CV ARE UNDER VISUAL METEOROLOGICAL CONDITIONS.
CV RECOVERY CASE II	2	THE APPROACH AND RECOVERY ROUTE TO THE CV ARE VARYING BETWEEN INSTRUMENT AND VISUAL METEOROLOGICAL CONDITIONS.
CV RECOVERY CASE III	3	THE APPROACH AND RECOVERY ROUTE TO THE CV ARE UNDER INSTRUMENT METEOROLOGICAL CONDITIONS.
UNDEFINED	4 THROUGH 7	

B-665

MIL-STD-6016B
APPENDIX B

DFI	NAME	DEFINITION
1546	CRYPTOPERIOD DESIGNATOR	DESIGNATES THE TIME PERIOD IN WHICH THE CRYPTOVARIABLE IS USED.

DATA STANDARD USAGE: Link 16

STATUS:

DUI	NAME	EXPLANATION	APPLICABILITY
001	CRYPTOPERIOD DESIGNATOR, LOCATION 0 [1 BIT] (CPD L0)	THE CRYPTOPERIOD DESIGNATOR FOR THE CRYPTOVARIABLE STORED IN SDU LOCATION 0.	J31.0E0
002	CRYPTOPERIOD DESIGNATOR, LOCATION 1 [1 BIT] (CPD L1)	THE CRYPTOPERIOD DESIGNATOR FOR THE CRYPTOVARIABLE STORED IN SDU LOCATION 1.	J31.0E0
003	CRYPTOPERIOD DESIGNATOR, LOCATION 2 [1 BIT] (CPD L2)	THE CRYPTOPERIOD DESIGNATOR FOR THE CRYPTOVARIABLE STORED IN SDU LOCATION 2.	J31.0E0
004	CRYPTOPERIOD DESIGNATOR, LOCATION 3 [1 BIT] (CPD L3)	THE CRYPTOPERIOD DESIGNATOR FOR THE CRYPTOVARIABLE STORED IN SDU LOCATION 3.	J31.0E0
005	CRYPTOPERIOD DESIGNATOR, LOCATION 4 [1 BIT] (CPD L4)	THE CRYPTOPERIOD DESIGNATOR FOR THE CRYPTOVARIABLE STORED IN SDU LOCATION 4.	J31.0E0
006	CRYPTOPERIOD DESIGNATOR, LOCATION 5 [1 BIT] (CPD L5)	THE CRYPTOPERIOD DESIGNATOR FOR THE CRYPTOVARIABLE STORED IN SDU LOCATION 5.	J31.0E0
007	CRYPTOPERIOD DESIGNATOR, LOCATION 6 [1 BIT] (CPD L6)	THE CRYPTOPERIOD DESIGNATOR FOR THE CRYPTOVARIABLE STORED IN SDU LOCATION 6.	J31.0E0
008	CRYPTOPERIOD DESIGNATOR, LOCATION 7 [1 BIT] (CPD L7)	THE CRYPTOPERIOD DESIGNATOR FOR THE CRYPTOVARIABLE STORED IN SDU LOCATION 7.	J31.0E0
009	CRYPTOPERIOD DESIGNATOR, CURRENT [1 BIT] (CPD CUR)	CRYPTOPERIOD DESIGNATOR FOR THE CURRENT CRYPTOPERIOD.	J31.0C1
010	CRYPTOPERIOD DESIGNATOR, REKEY [1 BIT] (CPD RKY)	THE CRYPTOPERIOD DESIGNATOR OF THE CRYPTOVARIABLE THAT IS TO BE	J31.0C2 J31.1I

DFI NAME
1546 CRYPTOPERIOD DESIGNATOR

DUI NAME	EXPLANATION	APPLICABILITY
010 (CONTINUED)	REKEYED.	

011 CRYPTOPERIOD DESIGNATOR, SYNCHRONIZATION [1 BIT] (CPD SYN)	THE CRYPTOPERIOD DESIGNATOR OF THE CRYPTOVARIABLE TO BE USED FOR REKEY SYNCHRONIZATION.	J31.0C2
--	---	---------

DATA ITEM	BIT CODE	EXPLANATION
-----------	----------	-------------

----- FOR DUIS 001-008, 010, AND 011 -----

ZERO	0
ONE	1

----- FOR DUI 009 -----

CURRENT CRYPTOPERIOD IS ZERO	0
CURRENT CRYPTOPERIOD IS ONE	1

DFI	NAME	DEFINITION
1548	UNIQUE VARIABLE UPDATE NUMBER	A 7 BIT NUMBER WHICH DEFINES WHICH UNIQUE VARIABLE IS CURRENTLY HELD BY THE TERMINAL.

DATA STANDARD USAGE: Link 16	STATUS:
------------------------------	---------

DUI NAME	EXPLANATION	APPLICABILITY
001 UNIQUE VARIABLE UPDATE NUMBER [7 BIT]	A 7 BIT NUMBER WHICH DEFINES WHICH UNIQUE VARIABLE IS CURRENTLY HELD BY THE TERMINAL.	J31.0C1

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
VARIABLE NUMBER	0 THROUGH 127	

DFI	NAME	DEFINITION
1549	CRYPTOSTATUS INFORMATION	INDICATES WHETHER OR NOT THE NEXT THREE FIELDS IN MESSAGE ARE KNOWN.

DATA STANDARD USAGE: Link 16	STATUS:
------------------------------	---------

DUI NAME	EXPLANATION	APPLICABILITY
001 CRYPTOSTATUS INFORMATION CODE [1 BIT] (CSI CDE)	INDICATES WHETHER OR NOT THE SECURE DATA UNIT IDENTIFICATION NUMBER, UNIQUE VARIABLE UPDATE NUMBER, AND CRYPTOVARIABLE DESIGNATOR, CURRENT ARE CONTAINED IN THE MESSAGE.	J31.0C1

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NOT CONTAINED	0	
CONTAINED	1	

DFI	NAME	DEFINITION
1550	WORD FORMAT	IDENTIFIES A WORD AS AN INITIAL, CONTINUATION OR EXTENSION WORD.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
001 WORD FORMAT [2 BIT]	IDENTIFIES A WORD AS AN INITIAL, CONTINUATION OR EXTENSION WORD.	J0.0I	J0.0E0	J0.0C1
		J0.1I	J0.1E0	J0.1C21
		J0.2I	J0.3I	J0.3E0
		J0.3C1	J0.3C2	J0.4I
		J0.4E0	J0.4C1	J0.4C2
		J0.5I	J0.6I	J0.6C1
		J0.6C2	J0.6C3	J0.6C4
		J0.7I	J0.7E0	J1.0I
		J1.0E0	J1.1I	J1.1E0
		J1.1C1	J1.1C2	J1.2I
		J1.2E0	J1.2E1	J1.3I
		J1.3E0	J1.4I	J1.4E0
		J1.5I	J1.5E0	J1.5C1
		J1.6I	J1.6E0	J2.0I
		J2.0E0	J2.0C1	J2.2I
		J2.2E0	J2.2C1	J2.2C2
		J2.2C3	J2.2C5	J2.3I
		J2.3E0	J2.3C1	J2.3C2
		J2.3C3	J2.4I	J2.4E0
		J2.4C1	J2.4C2	J2.4C3
		J2.4C4	J2.5I	J2.5E0
		J2.5C1	J2.5C3	J2.5C4
		J2.5C6	J2.6I	J2.6E0
		J2.6C1	J2.6C3	J2.6C6
		J3.0I	J3.0E0	J3.0C1
		J3.0C2	J3.0C3	J3.0C4
		J3.0C5	J3.1I	J3.1E0
		J3.1C1	J3.2I	J3.2E0
		J3.2C1	J3.2C4	J3.3I
		J3.3E0	J3.3C1	J3.3C2
		J3.4I	J3.4E0	J3.4C1
		J3.4C2	J3.5I	J3.5E0
		J3.5C1	J3.5C2	J3.5C3
		J3.6I	J3.6E0	J3.6E1
		J3.6C1	J3.6C2	J3.6C3
		J3.6C4	J3.6C5	J3.7I
		J3.7C1	J3.7C2	J3.7C3
		J3.7C4	J3.7C5	J5.4I

DFI NAME
1550 WORD FORMAT

DUI NAME
001 (CONTINUED)

EXPLANATION

APPLICABILITY		
J5.4E0	J5.4C1	J5.4C2
J6.0I	J6.0E0	J6.0C1
J7.0I	J7.0E0	J7.0C1
J7.1I	J7.1C1	J7.2I
J7.3I	J7.3C1	J7.3C2
J7.3C3	J7.4I	J7.4E0
J7.5I	J7.6I	J7.6E0
J7.6C1	J7.6C2	J7.6C3
J7.7I	J8.0I	J8.0E0
J8.1I	J9.0I	J9.0E0
J9.0C1	J9.0C2	J9.1I
J10.2I	J10.2C1	J10.2C2
J10.3I	J10.3E0	J10.3C1
J10.3C2	J10.5I	J10.6I
J12.0I	J12.0C1	J12.0C2
J12.0C3	J12.0C4	J12.0C5
J12.0C6	J12.0C7	J12.1I
J12.1E0	J12.2I	J12.3I
J12.3E0	J12.4I	J12.4E0
J12.5I	J12.5E0	J12.5E1
J12.6I	J12.6E0	J12.6C1
J12.6C2	J12.6C3	J12.6C4
J12.6C5	J12.6C6	J12.6C7
J12.7I	J12.7E0	J12.7E1
J12.7C1	J12.7C2	J12.7C3
J13.0I	J13.0E0	J13.0C1
J13.0C2	J13.2I	J13.2C1
J13.2C2	J13.2C3	J13.2C4
J13.2C5	J13.2C6	J13.2C7
J13.3I	J13.3C1	J13.3C2
J13.3C3	J13.3C4	J13.3C5
J13.3C6	J13.3C7	J13.4I
J13.4C1	J13.4C2	J13.5I
J13.5C1	J13.5C2	J14.0I
J14.0E0	J14.0C1	J14.0C2
J14.0C3	J14.0C4	J14.0C5
J14.0C6	J14.2I	J14.2E0
J14.2C1	J14.2C2	J14.2C3
J14.2C4	J14.2C5	J14.2C6
J14.2C7	J14.2C8	J15.0I
J15.0E0	J15.0C1	J17.0I

DFI NAME
1550 WORD FORMAT

DUI NAME
001 (CONTINUED)

EXPLANATION

APPLICABILITY
J17.0E0 J28.0I J28.1I
J28.2I J28.20I J28.20E0
J28.3I J28.4I J28.5I
J28.6I J28.7I J29.1I
J29.3I J29.4I J29.5I
J29.7I J30.0I J30.1I
J30.2I J30.3I J30.4I
J30.5I J30.6I J30.7I
J31.0I J31.0E0 J31.0C1
J31.0C2 J31.1I J31.1E0
J31.1E1 J31.7I

DATA ITEM

BIT CODE

EXPLANATION

----- FOR DUI 001 -----

INITIAL
CONTINUATION
EXTENSION
UNDEFINED

0
1
2
3

APPENDIX B

DFI NAME
1551 CONTINUATION WORD LABEL

DEFINITION
PROVIDES A LABEL FOR A CONTINUATION WORD.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME

EXPLANATION

APPLICABILITY

001 CONTINUATION WORD LABEL
[5 BIT]

PROVIDES A LABEL FOR A CONTINUATION
WORD.

J0.0C1	J0.1C21	J0.3C1
J0.3C2	J0.4C1	J0.4C2
J0.6C1	J0.6C2	J0.6C3
J0.6C4	J1.1C1	J1.1C2
J1.5C1	J2.0C1	J2.2C1
J2.2C2	J2.2C3	J2.2C5
J2.3C1	J2.3C2	J2.3C3
J2.4C1	J2.4C2	J2.4C3
J2.4C4	J2.5C1	J2.5C3
J2.5C4	J2.5C6	J2.6C1
J2.6C3	J2.6C6	J3.0C1
J3.0C2	J3.0C3	J3.0C4
J3.0C5	J3.1C1	J3.2C1
J3.2C4	J3.3C1	J3.3C2
J3.4C1	J3.4C2	J3.5C1
J3.5C2	J3.5C3	J3.6C1
J3.6C2	J3.6C3	J3.6C4
J3.6C5	J3.7C1	J3.7C2
J3.7C3	J3.7C4	J3.7C5
J5.4C1	J5.4C2	J6.0C1
J7.0C1	J7.1C1	J7.3C1
J7.3C2	J7.3C3	J7.6C1
J7.6C2	J7.6C3	J9.0C1
J9.0C2	J10.2C1	J10.2C2
J10.3C1	J10.3C2	J12.0C1
J12.0C2	J12.0C3	J12.0C4
J12.0C5	J12.0C6	J12.0C7
J12.6C1	J12.6C2	J12.6C3
J12.6C4	J12.6C5	J12.6C6
J12.6C7	J12.7C1	J12.7C2
J12.7C3	J13.0C1	J13.0C2
J13.2C1	J13.2C2	J13.2C3
J13.2C4	J13.2C5	J13.2C6
J13.2C7	J13.3C1	J13.3C2
J13.3C3	J13.3C4	J13.3C5
J13.3C6	J13.3C7	J13.4C1
J13.4C2	J13.5C1	J13.5C2
J14.0C1	J14.0C2	J14.0C3
J14.0C4	J14.0C5	J14.0C6

DFI NAME
1551 CONTINUATION WORD LABEL

DFI NAME	EXPLANATION	APPLICABILITY
001 (CONTINUED)		J14.2C1 J14.2C2 J14.2C3
		J14.2C4 J14.2C5 J14.2C6
		J14.2C7 J14.2C8 J15.0C1
		J31.0C1 J31.0C2

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
UNDEFINED	0	
NUMERIC	1 THROUGH 31	IDENTIFIES THE NUMBER OF THE CONTINUATION WORD.

DFI NAME
1552 SLOT ASSIGN INDEX NUMBER

DEFINITION
PROVIDES AN INDEX NUMBER IN THE INITIAL ENTRY MESSAGE TO
REFLECT CHANGES THAT MAY BE MADE TO THE SYSTEM TIME SLOT
ASSIGNMENTS. LARGER VALUES OF THE SAI NUM INDICATE LATER
UPDATES.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 SLOT ASSIGN INDEX NUMBER [4 BIT] (SAI NUM)		J0.0I
DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		CURRENT ASSIGNMENT INDEX NUMBER IN 1 NUMBER INCREMENTS.
SLOT ASSIGN INDEX NUMBER	0 THROUGH 15	CURRENT ASSIGNMENT INDEX NUMBER IN 1 NUMBER INCREMENTS.

DFI NAME
1553 RESPONSE VALUE

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 RESPONSE VALUE [2 BIT] (RSP VAL)		J7.2I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
REVERSE CORRELATION IS ACCEPTABLE	0	
REVERSE CORRELATION IS NOT ACCEPTABLE	1	REVERSE CORRELATION WILL BE REJECTED.
CORRELATION REQUEST IS REJECTED	2	
MANUALLY INITIATED CORRELATION REQUEST	3	

DFI NAME DEFINITION
1554 POINT/LINE DESCRIPTOR DEFINES WHETHER MULTIPLE POINTS IN A MESSAGE SHOULD BE
CONSIDERED AS INDIVIDUAL POINTS OR SHOULD BE JOINED IN A LINE.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
002 POINT/LINE/AREA DESCRIPTOR, 1 [2 BIT] (PLA DES, 1)	DEFINES WHETHER THE MESSAGE IS DESCRIBING A POINT, SINGLE POINT AREA, LINE, OR MULTI-POINT AREA.	J3.0I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 002 -----		
POINT	0	A SINGLE POINT.
SINGLE POINT AREA	1	A SQUARE, RECTANGLE, CIRCLE OR ELLIPSE DEFINED USING A SINGLE POINT.
LINE	2	TWO OR MORE POINTS WHERE THE FIRST AND LAST DO NOT COINCIDE.
MULTI-POINT AREA	3	FOUR OR MORE POINTS WHERE THE FIRST AND LAST COINCIDE TO FORM AN AREA.

B-677

MIL-STD-6016B
APPENDIX B

DFI NAME DEFINITION
1555 SITE TYPE IDENTIFIES THE TYPE OF SITE.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 SITE TYPE [6 BIT]	IDENTIFIES THE TYPE OF SITE BEING REPORTED IN THE MESSAGE.	J13.5I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
ADOC	1	AIR DEFENSE TACTICAL OPERATIONS CENTER.
SOC	2	SECTOR OPERATION CENTER.
SOC/CRC	3	
CRC	4	CONTROL AND REPORTING CENTER.
CRP	5	CONTROL AND REPORTING POST.
AEGIS	6	AIRBORNE EARLY WARNING GROUND INTERFACE SEGMENT.
TACC (USAF)	7	TACTICAL AIR CONTROL CENTER.
CRC/MCE	8	CRC/MODULAR CONTROL EQUIPMENT.
SSSB	9	SHIP SHORE SHIP BUFFER.
HIMAD BDE	10	HIGH TO MEDIUM ALTITUDE AIR DEFENSE BRIGADE.
HIMAD BN	11	HIMAD BATTALION.
PATRIOT BN ICC	12	PATRIOT BN INFORMATION COORDINATION CENTER.
PATRIOT/ECS	13	PATRIOT ENGAGEMENT CONTROL STATION.
HAWK/AFP	14	HAWK ASSAULT FIRE PLATOON.
SHORAD BDE	15	SHORT RANGE AIR DEFENSE BDE.
SHORAD BN	16	
SWC	17	COMPASS EARS.
TACC (USMC)	18	TACTICAL AIR COMMAND CENTER.
TADC	19	TACTICAL AIR DIRECTION CENTER.
TAOC	20	TACTICAL AIR OPERATIONS CENTER.
ROCC	21	REGIONAL OPERATIONS CONTROL CENTER.
RADIL	22	ROCC AWACS DIGITAL INTERFACE LINK.
ASIT	23	ADAPTABLE SURFACE INTERFACE TERMINAL.
GCI	24	GROUND CONTROL INTERCEPT.
MPC	25	MESSAGE PROCESSING CENTER.
TOC	26	TACTICAL OPERATIONS CENTER.

DFI NAME
1555 SITE TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
DIVARTY	27	DIVISION ARTILLERY.
NIKE	28	
GACC	29	GROUND ATTACK CONTROL CENTER.
PLSS	30	PRECISION LOCATED STRIKE SYSTEM.
ENSCE	31	ENEMY SITUATION CORRELATION ELEMENT.
TGIF	32	TRANSPORTABLE GROUND INTERCEPT FACILITY.
FACP	33	FORWARD AIR CONTROL POST.
TOC (THAAD)	34	TACTICAL OPERATIONS CENTER (THEATER HIGH ALTITUDE AREA DEFENSE).
LCS (THAAD)	35	LAUNCHER COMMUNICATIONS STATION (THEATER HIGH ALTITUDE AREA DEFENSE).
SSI (THAAD)	36	SENSOR SYSTEM INTERFACE (THEATER HIGH ALTITUDE AREA DEFENSE).
JTAGS	37	JOINT TACTICAL GROUND STATION.
ADTOC/BN	38	AIR DEFENSE TACTICAL OPERATIONS CENTER, BATTALION.
ADTOC/BDE	39	AIR DEFENSE TACTICAL OPERATIONS CENTER, BRIGADE.
ADCP	40	AIR DEFENSE COMMUNICATIONS PLATFORM.
BM DEFENSE SITE	41	BALLISTIC MISSILE DEFENSE SITE.
UNDEFINED	42 THROUGH 63	

DFI NAME DEFINITION
1568 DATUM ERROR

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME EXPLANATION APPLICABILITY

001 DATUM ERROR THE MAGNITUDE OF THE DATUM ERROR. J3.4C2
[8 BIT] USED ONLY FOR DATA REPORT TYPE
VALUE = 4 IN J3.4 MESSAGE.

DATA ITEM BIT CODE EXPLANATION

----- FOR DUI 001 -----

0 THROUGH 15 14/16 DM 0 THROUGH 254 IN 1/16 DM (125 YARDS) INCREMENTS.
NO STATEMENT 255 ALL ONES.

DFI	NAME	DEFINITION
1571	ACTIVE RELAY INDICATOR	SPECIFIES THE STATUS OF THE RELAYING FUNCTION OF THOSE UNITS CAPABLE OF RELAYING MESSAGES.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
002 ACTIVE RELAY INDICATOR, WIDE AREA NETWORK [1 BIT] (ARI WAN)	INDICATES THE STATUS OF A UNIT'S RE-LAYING CAPABILITY OVER THE WIDE-AREA NETWORK.	J2.2I J2.5I	J2.3I J2.6I	J2.4I
003 ACTIVE RELAY INDICATOR, VOICE CHANNEL [1 BIT] (ARI VC)	INDICATES THE STATUS OF A UNIT'S RE-LAYING CAPABILITY OVER A VOICE CHANNEL.	J2.2C2 J2.5C1	J2.3C2 J2.6C1	J2.4C2
004 ACTIVE RELAY INDICATOR, CONTROL CHANNEL [1 BIT] (ARI CC)	INDICATES THE STATUS OF A UNIT'S RE-LAYING CAPABILITY OVER A CONTROL CHANNEL.	J2.2C2 J2.5C1	J2.3C2 J2.6C1	J2.4C2

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 002-004 -----		
RELAYING FUNCTION INACTIVE	0	
RELAYING FUNCTION ACTIVE	1	

DFI NAME DEFINITION
1576 SAM MODE STATE PROVIDES THE SPECIFIC STATE OF A PATRIOT OR HAWK SAM UNIT.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 SAM MODE STATE [3 BIT]	PROVIDES THE SPECIFIC STATE OF A PATRIOT OR HAWK SAM UNIT.	J13.5I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
STANDBY	1	
TRANSITION TO OFF-LINE	2	
TRANSITION TO STANDBY	3	
TRANSITION OUT OF STANDBY	4	
TRANSITION TO ROAD MARCH	5	
REORIENTATION	6	
INITIALIZATION	7	

DFI NAME
1580 ANTENNA SCAN RATE

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
----------	-------------	---------------

004 ANTENNA SCAN RATE [10 BIT]	THE RATE REQUIRED FOR A BEAM OF RADIO FREQUENCY ENERGY TO COMPLETE A GIVEN SCAN PATTERN.	J14.0C4
-----------------------------------	--	---------

005 ANTENNA SCAN PERIOD [10 BIT]	THE TIME REQUIRED FOR ONE COMPLETE SCAN.	J14.0C4
-------------------------------------	---	---------

DATA ITEM	BIT CODE	EXPLANATION
-----------	----------	-------------

----- FOR DUI 004 -----

NO ROTATION/NO SCAN	0	
1 THROUGH 1022 HZ	1 THROUGH 1022	IN 1 HZ INCREMENTS.
EQUAL TO OR GREATER THAN 1023 HZ	1023	

----- FOR DUI 005 -----

NO STATEMENT	0	
1/8 THROUGH 127 3/4 SECONDS PER SCAN	1 THROUGH 1022	IN 1/8 SECONDS PER SCAN INCREMENTS.
GREATER THAN 127 3/4 SECONDS PER SCAN	1023	

B-683

MIL-STD-6016B
APPENDIX B

DFI NAME
1599 NUMBER OF MISSILES

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 NUMBER OF MISSILES [3 BIT]	NUMBER OF MISSILES TO BE LAUNCHED.	J9.0C2

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
ALL AVAILABLE	0	
1 THROUGH 7 MISSILES	1 THROUGH 7	IN INCREMENTS OF ONE.

DFI	NAME	DEFINITION
1600	OPERATIONAL IMPAIRMENT	DEFINES THE PRIMARY SYSTEM COMPONENT THAT IS DEGRADING THE OPERATIONAL CAPABILITY OF THE PLATFORM OR SYSTEM.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 OPERATIONAL IMPAIRMENT [5 BIT]	DEFINES THE PRIMARY SYSTEM COMPONENT THAT IS DEGRADING THE OPERATIONAL CAPABILITY OF THE PLATFORM OR SYSTEM.	J13.5C1

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
SURVEILLANCE RADAR	1	
ACQUISITION RADAR	2	
TRACKING RADAR	3	
GUIDANCE RADAR	4	
MULTIFUNCTION RADAR	5	
HEIGHT FINDER RADAR	6	
ATC RADAR	7	
IFF/SIF INTERROGATOR	8	
MOBILITY	9	
PRIMARY POWER	10	
COMMUNICATIONS	11	
ES PASSIVE SENSOR	12	
MULTISTATIC PASSIVE SENSOR	13	
ORDNANCE DEPLETED	14	
LAUNCHER FAILURE	15	
TDS FAILURE	16	
UNDEFINED	17 THROUGH 31	

DFI	NAME	DEFINITION
1604	SIMULATION INDICATOR	AN INDICATION WHETHER THE TRACK OR UNIT IS REAL OR SIMULATED.
DATA STANDARD USAGE: Link 16		STATUS:
DUI NAME	EXPLANATION	APPLICABILITY
001 SIMULATION INDICATOR [1 BIT] (SIM IND)	INDICATES WHETHER THE TRACK REFER- ENCED IN THE MESSAGE IS A REAL OR A SIMULATED TRACK.	J2.0I
		J2.2I
		J2.3I
		J2.4I
		J2.5I
		J2.6I
		J3.0I
		J3.1I
		J3.2I
		J3.3I
		J3.4I
		J3.5I
		J3.6I
		J3.7I
		J5.4I
DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
REAL TRACK OR UNIT	0	
SIMULATED TRACK OR UNIT	1	

DFI	NAME	DEFINITION
1606	INFORMATION MANAGEMENT ACTION NUMBER	AN INDICATION OF THE TRACK MANAGEMENT ACTION TO BE PERFORMED.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 ACTION, TRACK MANAGEMENT [3 BIT] (ACT)	DESCRIBES THE TRACK MANAGEMENT ACTION TO BE ACCOMPLISHED WHEN A TRACK MANAGEMENT MESSAGE IS EXCHANGED ON THE INTERFACE.	J7.0I
002 ACTION, DATA UPDATE REQUEST [3 BIT]	DESCRIBES THE DATA THAT IS BEING REQUESTED BY THE TRANSMISSION OF A DATA UPDATE REQUEST MESSAGE.	J7.1I
003 ACTION, CORRELATE [3 BIT]	DESCRIBES THE ACTION TO BE ACCOMPLISHED WHEN A CORRELATION MESSAGE IS RECEIVED.	J7.2I
004 ACTION, POINTER [3 BIT]	USED AS AN INDICATOR TO FURTHER ADDRESS THE POINTER MESSAGE TO AN OPERATOR WITHIN THE UNIT.	J7.3I
006 ACTION, IFF/SIF MANAGEMENT [3 BIT]	USED TO DESCRIBE THE ACTION REQUIRED BY THE SOURCE TRACK NUMBER TO MANAGE IFF/SIF DATA ON THE INTERFACE.	J7.5I
007 ACTION, FILTER MANAGEMENT [3 BIT]		J7.6I
008 ACTION, ASSOCIATION [3 BIT]	USED TO ASSOCIATE THE DATA FROM TWO DIFFERENT TRACK NUMBERS WHEN THE TWO TRACK NUMBERS ARE BELIEVED TO BE THE SAME CONTACT.	J7.7I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
DROP TRACK REPORT	0	THE UNIT SPECIFIED IN THE SOURCE TN. CEASED REPORTING THE REFERENCE TN.
DIFFERENCE REPORT	1	THE UNIT SPECIFIED IN THE SOURCE TN HAS INFORMATION ON A TRACK, I.E.,

DFI NAME
1606 INFORMATION MANAGEMENT ACTION
NUMBER

DATA ITEM (CONTINUED)
(CONTINUED)

BIT CODE

EXPLANATION
ENVIRONMENT/CATEGORY, IDENTITY,
EXERCISE INDICATOR AND/OR SPECIAL
INTEREST INDICATOR, WHICH IS
DIFFERENT FROM THAT BEING REPORTED
ON THE TRACK SPECIFIED IN THE
REFERENCE TN. THE ENVIRONMENT/
CATEGORY, IDENTITY, AND SPECIAL
INTEREST INDICATOR MUST BE SET TO
THE UNIT'S LOCAL DATA VALUES.
REFER TO THE ENVIRONMENT/CATEGORY
DIFFERENCE RESOLUTION TABLE.

CHANGE DATA ORDER

2

THE UNIT SPECIFIED IN THE SOURCE TN
DIRECTS THAT THE ENVIRONMENT/
CATEGORY, IDENTITY, EXERCISE
INDICATOR AND SPECIAL INTEREST
INDICATOR ON THE TRACK SPECIFIED
IN THE REFERENCE TN BE CHANGED TO
THAT SPECIFIED IN THE ENVIRONMENT/
CATEGORY, IDENTITY, EXERCISE
INDICATOR AND SPECIAL INTEREST
INDICATOR FIELDS OF THIS MESSAGE.

EMERGENCY STATUS CHANGE

3

SET OR CLEAR THE EMERGENCY INDICATOR
FOR THE REFERENCE TN AS INDICATED
BY THE VALUE IN THE ALERT STATUS
CHANGE FIELD.

FORCE TELL STATUS CHANGE

4

SET OR CLEAR THE FORCE TELL
INDICATOR FOR THE REFERENCE TN AS
INDICATED BY THE VALUE IN THE
ALERT STATUS CHANGE FIELD.

STRENGTH CHANGE

5

THE UNIT SPECIFIED IN THE SOURCE TN
FIELD DIRECTS THAT THE STRENGTH OF
THE TRACK SPECIFIED IN THE
REFERENCE TN BE CHANGED TO THAT
SPECIFIED IN THE STRENGTH;
STRENGTH, TOTAL NUMBER OF
VEHICLES; AND/OR STRENGTH, PERCENT
OF TRACKED VEHICLES FIELDS.

EXERCISE STATUS ORDER

6

SET THE IDENTITY OF ALL TRACKS WHICH
ARE BEING REPORTED WITH THE
EXERCISE INDICATOR SET TO ONE, AS
FRIEND.

DFI NAME
1606 INFORMATION MANAGEMENT ACTION
NUMBER

DATA ITEM (CONTINUED) UNDEFINED	BIT CODE 7	EXPLANATION
----- FOR DUI 002 -----		
DATA UPDATE REQUEST BY REQUEST INDICATOR	0	THE UNIT SPECIFIED IN THE ADDRESSEE TN IS REQUESTED TO TRANSMIT ALL DATA SPECIFIED BY THE REQUEST INDICATORS.
DATA UPDATE REQUEST BY TRACK NUMBER	1	UNIT(S) SPECIFIED IN THE ADDRESSEE TN ARE REQUESTED TO TRANSMIT CURRENT DATA APPLICABLE TO THE REFERENCE TN.
BALLISTIC MISSILE UPDATE REQUEST	2	THE UNIT SPECIFIED IN THE ADDRESSEE TN IS REQUESTED TO TRANSMIT DATA APPLICABLE TO THE REFERENCE TN.
UNDEFINED	3 THROUGH 7	
----- FOR DUI 003 -----		
CORRELATE DATA	0	THE TRACK SPECIFIED IN THE RETAINED TN HAS BEEN CORRELATED WITH THE TRACK SPECIFIED IN THE DROPPED TN. THE RETAINED TN SHOULD BE RETAINED AND THE DROPPED TN SHOULD BE DROPPED. ALL RECEIVING UNITS WILL PERFORM THE SAME CORRELATION EXCEPT AS SPECIFICALLY DEFINED IN THE RESOLUTION OF DUAL DESIGNATIONS PARAGRAPH OF THE SYSTEM INFORMATION SUBSECTION.
UNDEFINED	1 THROUGH 7	
----- FOR DUI 004 -----		
NO STATEMENT	0	
WEAPONS	1	DISPLAY TO SENIOR WEAPONS COORDINATOR.
TRACKING	2	DISPLAY TO TRACKING OPERATOR.
ELECTRONIC WARFARE	3	DISPLAY TO ELECTRONIC WARFARE SUPERVISOR.
SPECIAL PROCESSING	4	DISPLAY TO SPECIAL PROCESSING

DFI NAME
1606 INFORMATION MANAGEMENT ACTION
NUMBER

DATA ITEM (CONTINUED)
(CONTINUED)
UNDEFINED

BIT CODE
5 THROUGH 7

EXPLANATION
OPERATOR.

----- FOR DUI 006 -----

CLEAR IFF/SIF

0

THE UNIT SPECIFIED IN THE SOURCE TN
DIRECTS THAT IFF/SIF DATA (MODES
I, II, III, AND/OR IV) FOR THE
TRACK SPECIFIED IN THE REFERENCE
TN WILL NOT BE REPORTED ON THE
INTERFACE UNTIL UPDATED IFF/SIF
DATA IS RE-ENTERED (MANUALLY,
AUTOMATICALLY OR FROM DATA LINK
REPORTS).

IFF/SIF DIFFERENCE
REPORT

1

THE UNIT SPECIFIED IN THE SOURCE TN
HAS DIFFERENT IFF/SIF DATA (MODE
I, II, III, AND/OR IV) FOR THE
TRACK SPECIFIED IN THE REFERENCE
TN. THE MODE FIELDS MUST BE SET
TO THE UNIT'S LOCAL IFF/SIF DATA.

IFF/SIF UPDATE REQUEST

2

THE UNIT SPECIFIED IN THE SOURCE TN
IS REQUESTING UPDATED IFF/SIF DATA
(MODE I, II, III, AND/OR IV) FOR
THE TRACK SPECIFIED IN THE
REFERENCE TN FROM THE OTHER UNITS
IN THE INTERFACE.

SPECIAL CODE

3

THE DATA IN THIS MESSAGE ARE SPECIAL
CODES AND ARE NOT TO BE
INTERPRETED AS IFF DATA.

UNDEFINED

4 THROUGH 7

----- FOR DUI 007 -----

FILTER IMPLEMENTATION
REQUEST

0

THE SOURCE TN REQUESTS THE ADDRESSEE
TN IMPLEMENT THE FILTER DEFINED IN
THIS SOURCE MESSAGE.

FILTER DESCRIPTION
REPORT

1

THE SOURCE TN IS DESCRIBING THE
FILTER THAT HAS BEEN IMPLEMENTED
BY FILTER TYPE AND NUMBER.

DELETE FILTER REQUEST/
REPORT

2

THE SOURCE TN REQUESTS THE ADDRESSEE
TN DELETE THE FILTER SPECIFIED IN

DFI NAME
1606 INFORMATION MANAGEMENT ACTION
NUMBER

DATA ITEM (CONTINUED)
(CONTINUED)

BIT CODE

EXPLANATION
THE FILTER NUMBER FIELD. WHEN THE
ADDRESSEE TN IS 00177 (OCTAL), THE
SOURCE TN HAS DELETED THE FILTER
SPECIFIED IN THE FILTER NUMBER
FIELD.

UNDEFINED

3 THROUGH 7

----- FOR DUI 008 -----

ASSOCIATE DATA

0

THE INFORMATION PERTAINING TO THE
TRACKS SPECIFIED BY THE SUBJECT TN
AND THE ASSOCIATED TN IS DEEMED TO
BE ASSOCIATED WITH THE SAME
CONTACT.

TERMINATE ASSOCIATION

1

THE TN SPECIFIED IN THE SUBJECT TN
IS NO LONGER ASSOCIATED WITH THE
TRACK/POINT SPECIFIED IN THE
ASSOCIATED TN.

UNDEFINED

2 THROUGH 7

DFI	NAME	DEFINITION
1610	MODE APPLICABILITY	SPECIFIES WHICH IFF/SIF CODES WITHIN A PARTICULAR MESSAGE ARE APPLICABLE.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 MODE I CODE APPLICABILITY [1 BIT] (I APP)	SPECIFIES WHETHER THE MODE I CODE IS OR IS NOT APPLICABLE TO THE MESSAGE.	J7.5I
002 MODE II CODE APPLICABILITY [1 BIT] (II APP)	SPECIFIES WHETHER THE MODE II CODE IS OR IS NOT APPLICABLE TO THE MESSAGE.	J7.5I
003 MODE III CODE APPLICABILITY [1 BIT] (III APP)	SPECIFIES WHETHER THE MODE III CODE IS OR IS NOT APPLICABLE TO THE MESSAGE.	J7.5I
004 MODE IV INDICATOR APPLICABILITY [1 BIT] (IV APP)	SPECIFIES WHETHER THE MODE IV INDI- CATOR IS OR IS NOT APPLICABLE TO THE MESSAGE.	J7.5I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
MODE I CODE IS NOT APPLICABLE	0	
MODE I CODE IS APPLICABLE	1	
----- FOR DUI 002 -----		
MODE II CODE IS NOT APPLICABLE	0	
MODE II CODE IS APPLICABLE	1	
----- FOR DUI 003 -----		
MODE III CODE IS NOT APPLICABLE	0	
MODE III CODE IS APPLICABLE	1	

DFI NAME
1610 MODE APPLICABILITY

DATA ITEM (CONTINUED) ----- FOR DUI 004 -----	BIT CODE	EXPLANATION
MODE IV INDICATOR IS NOT APPLICABLE	0	
MODE IV INDICATOR IS APPLICABLE	1	

DFI NAME DEFINITION
1612 ELEVATION EXPRESSES THE ELEVATION OF AN OBJECT OR POINT AS MEASURED
OUTWARD FROM THE EARTH AS A POSITIVE QUANTITY ABOVE MEAN SEA
LEVEL (MSL).

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
001 ELEVATION, 25 FT [11 BIT]	THE ELEVATION IN FEET OF AN OBJECT OR POINT AS MEASURED OUTWARD FROM THE EARTH AS A POSITIVE QUANTITY ABOVE MEAN SEA LEVEL (MSL).	J2.3I J3.5I	J2.5I	J2.6I
002 ELEVATION, 25 FT, 1 [10 BIT]	THE ELEVATION IN FEET OF AN OBJECT OR POINT AS MEASURED OUTWARD FROM THE EARTH AS A POSITIVE QUANTITY ABOVE MEAN SEA LEVEL (MSL).	J12.0C3		
003 ELEVATION, LSBS [3 BIT]	USED IN CONJUNCTION WITH ANOTHER ELEVATION FIELD TO INCREASE THE PRECISION OF THE FIELD.	J3.5C3	J12.0C5	

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
0 THROUGH 51,150 FEET ELEVATION UNKNOWN	0 THROUGH 2046 2047	IN 25 FOOT INCREMENTS.
----- FOR DUI 002 -----		
0 THROUGH 25,550 FEET NO STATEMENT	0 THROUGH 1022 1023	IN 25 FOOT INCREMENTS.
----- FOR DUI 003 WITH 001 -----		
0 THROUGH 51,193.750 FEET ELEVATION UNKNOWN	0 THROUGH 16383 16384	IN 25/8 FOOT INCREMENTS.
----- FOR DUI 003 WITH 002 -----		
0 THROUGH 25,593.75 FEET NO STATEMENT	0 THROUGH 8190 8191	IN 25/8 FOOT INCREMENTS.

DFI	NAME	DEFINITION			
1613	NETWORK PARTICIPATION STATUS INDICATOR	SPECIFIES THE STATUS OF A UNIT'S PARTICIPATION ON THE INTERFACE.			
DATA STANDARD USAGE: Link 16		STATUS:			
DUI NAME		EXPLANATION	APPLICABILITY		
001	NETWORK PARTICIPATION STATUS INDICATOR [4 BIT] (NPS IND)	INDICATES TO WHAT DEGREE A UNIT IS PARTICIPATING ON THE INTERFACE.	J2.2I J2.5I	J2.3I J2.6I	J2.4I
DATA ITEM		BIT CODE	EXPLANATION		
----- FOR DUI 001 -----					
NO STATEMENT		0			
ACTIVE-NON SPECIFIC		1			
INACTIVE-NON SPECIFIC		2			
CONDITIONAL RADIO SILENCE		3			
HIGH ERROR RATE		4			
NO JO.0 MESSAGE BEING RECEIVED		5			
TACTICAL DATA SYSTEM FAILURE		6			
POLLING		7			
UNDEFINED		8 THROUGH 15			

DFI NAME DEFINITION
1615 DELTA EPOCH

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY	
002 DELTA EPOCH, 1 [2 BIT] (DEL EP1)		J0.6C1	
003 DELTA EPOCH, 2 [2 BIT] (DEL EP2)		J0.6C1	
004 DELTA EPOCH, 3 [2 BIT] (DEL EP3)		J0.6C1	
005 DELTA EPOCH, 4 [2 BIT] (DEL EP4)		J0.6C1	
006 DELTA EPOCH [3 BIT]	SPECIFIES THE EPOCH IN WHICH THE ADDRESSED TERMINAL SHALL EXECUTE THE ASSIGNMENT.	J0.3I	J0.4I
007 EPOCH NUMBER, DELTA CHANGE [2 BIT] (EPN DCH)	SPECIFIES THE INCREMENT BY WHICH THE EPOCH NUMBER AT THE TIME OF EXECUTION IS CHANGED.	J0.2I	

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 002-005 -----		
CURRENT EPOCH	0	
1 EPOCH FROM THE CURRENT EPOCH	1	
2 EPOCHS FROM THE CURRENT EPOCH	2	
3 EPOCHS FROM THE CURRENT EPOCH	3	
----- FOR DUI 006 -----		
CURRENT EPOCH	0	
1 EPOCH FROM THE CURRENT EPOCH	1	
2 EPOCHS FROM THE CURRENT EPOCH	2	

DFI NAME
1615 DELTA EPOCH

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
3 EPOCHS FROM THE CURRENT EPOCH	3	
4 EPOCHS FROM THE CURRENT EPOCH	4	
5 EPOCHS FROM THE CURRENT EPOCH	5	
6 EPOCHS FROM THE CURRENT EPOCH	6	
7 EPOCHS FROM THE CURRENT EPOCH	7	
----- FOR DUI 007 -----		
NO STATEMENT	0	
DECREMENT BY 1	1	
NO CHANGE	2	
INCREMENT BY 1	3	

DFI NAME
1616 POOL NUMBER

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 REALLOCATION POOL NUMBER [3 BIT] (POOL NUMBER)	IDENTIFIES THE REALLOCATION POOL REFERRED TO BY THE MESSAGE.	J0.7I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
POOL ONE	0	
POOL TWO	1	
POOL THREE	2	
POOL FOUR	3	
POOL FIVE	4	
POOL SIX	5	
POOL SEVEN	6	
POOL EIGHT	7	

DFI NAME DEFINITION
1619 DISPLACED POSITION INDICATOR USED TO INDICATE THE ACTUAL LOCATION OF A JTIDS/MIDS UNIT WHEN
THE JTIDS/MIDS ANTENNA IS NOT COLLOCATED WITH THE UNIT.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 DISPLACED POSITION INDICATOR [1 BIT] (DP IND)	INDICATES WHETHER THE JTIDS/MIDS UNIT'S LOCATION IS CONTAINED IN THE EXTENSION OR CONTINUATION WORD.	J2.4I J2.5I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
ACTUAL UNIT POSITION CONTAINED IN EXTENSION WORD	0	
ACTUAL UNIT POSITION CONTAINED IN CONTINUA- TION WORD	1	

DFI NAME DEFINITION
1621 SUMMATION INDICATOR INDICATES THAT STORES CITED ARE FOR AN ENTIRE FLIGHT.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 SUMMATION INDICATOR [1 BIT] (SUM IND)		J13.2C2 J13.2C7

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
FLIGHT SUMMATION	1	

DFI NAME
1622 TYPE DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY	
001 SAM/SSM TYPE, 1 [9 BIT]	IDENTIFIES A TYPE OF SAM/SSM ON BOARD A SURFACE VESSEL.	J3.3C2	J6.0C1
002 SAM/SSM TYPE, 2 [9 BIT]	IDENTIFIES A SECOND TYPE OF SAM/SSM ON BOARD A SURFACE VESSEL.	J3.3C2	J6.0C1
003 SAM/SSM TYPE, 3 [9 BIT]	IDENTIFIES A THIRD TYPE OF SAM/SSM ON BOARD A SURFACE VESSEL.	J3.3C2	J6.0C1

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001-003 -----		
NO STATEMENT	0	
SAM	1	
SSM	2	
HAWK	3	
I-HAWK	4	
PATRIOT	5	
NIKE	6	
REDEYE	7	
STINKER	8	
HELLFIRE	9	
PERSHING	10	
FIM-92 STINGER	11	
NIM-23 HAWK	12	
MIM-42 REDEYE	13	
MIM-72 CHAPARRAL	14	
MIM-104 PATRIOT	15	
RIM-2 TERRIER	16	
RIM-7 SEA SPARROW	17	
RIM-8 TALOS	18	
RIM-24 TARTAR	19	
RIM-66 STANDARD MISSILE	20	
RIM-67 STANDARD MISSILE	21	
BLOWPIPE	22	
UNDEFINED	23	
SEA DART	24	
SEA WOLF	25	

B-701

MIL-STD-6016B
APPENDIX B

DFI NAME
1622 TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
CROTALE	26	
RAPIER	27	
UNDEFINED	28	
SAM ROLAND	29	
SA-2 GUIDELINE	30	
SA-3 GOA	31	
SA-4 GANEF	32	
SA-N-3 GOBLET	33	
SA-5 GAMMON	34	
SA-N-4 GECKO	35	
SA-6 GAINFUL	36	
SA-N-6 GRUMBLE	37	
SA-7 GRAIL	38	
SA-8 GECKO	39	
SA-9 GASKIN	40	
SA-10 GRUMBLE	41	
SA-11 GADFLY	42	
SA-12	43	
SA-13 GOPHER	44	
MISTRAL	45	
SA-N-7 GADFLY	46	
SA-N-8 GREMLIN	47	
SA-14 GREMLIN	48	
SA-16 GIMLET	49	
SA-X-17	50	
SM-2 BLOCK II	51	
SM-2 BLOCK III	52	
SM-2 BLOCK IIIA	53	
SM-2 BLOCK IIIB	54	
SM-2 BLOCK IV	55	
SM-2 BLOCK IVA	56	
SM-3 LEAP	57	
SA-N-5 GRAIL	58	
SA-N-11 GRISOM	59	
SA-12A GLADIATOR	60	
SA-12B GIANT	61	
UNDEFINED	62	
SA-15 GAUNTLET	63	
SA-17 GRIZZLY	64	
SA-N-12 GRIZZLY	65	
SA-18 GROUSE	66	

B-702

MIL-STD-6016B
APPENDIX B

DFI NAME
1622 TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
SA-19 GRISOM	67	
RIM-116 RAM	68	
ADATS	69	
JAVELIN	70	
STARBURST	71	
STARSTREAK	72	
ASPIDE	73	
FRONT DOOR	74	
ROLAND II	75	
AKASH	76	
ANZA	77	
ANZA II	78	
CSA-1	79	
CSA-2	80	
CSA-4	81	
CSA-5	82	
FM-80	83	
HN-5	84	
NK-7	85	
NK-16	86	
PANTZYR	87	
RAPIER 2000/JERNAS	88	
RBS-90	89	
SAKR	90	
SAVA	91	
SHANINE	92	
SKYGUARD ASPIDE	93	
SPADA	94	
TAM SAM	95	
TIGERCAT	96	
VANGUARD	97	
SA-N-1 GOA	98	
SA-N-9 GAUNTLET	99	
SA-N-10	100	
ALBATROS/ASPIDE	101	
SM-1	102	
SA-2 IRAQ MOD	103	
SA-2 NK RO	104	
AEGIS-TI	105	
MASURCA	106	
SEA INDIGO	107	

B-703

MIL-STD-6016B
APPENDIX B

DFI NAME
1622 TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
TANSAM	108	
GUARDSMAN	109	
SILKWORM	110	
SNOW DRIFT 11/17	111	
TUBE ARM SA-11	112	
UNDEFINED	113	
EYE SHIELD	114	
SS-N-2	115	
ELDORADO	116	
FLYCATCHER	117	
GEPARD	118	
GIN SLING	119	
SS-N-S SCOOP PAIR	120	
SGR-105 DA-01/00	121	
RBS-70 (SLM)	122	
ASTER 15	123	
ASTER 30	124	
EXOCET MM38	125	
EXOCET MM40	126	
BARAK I	127	
RBS-15	128	
OTOMAT MK I	129	
OTOMAT MK II TESEO	130	
HY 2	131	
SS-N-3C SHADDOCK	132	
SS-N-8 SAWFLY	133	
SS-N-9 SIREN	134	
SS-N-12 SANDBOX	135	
SS-N-14 SILEX	136	
SS-N-15 STARFISH	137	
SS-N-16 STALLION	138	
SS-N-18 STINGRAY	139	
SS-N-19 SHIPWRECK	140	
SS-N-20 STURGEON	141	
SS-N-21 SAMPSON	142	
SS-N-22 SUNBURN	143	
SS-N-23 SKIFF	144	
SS-N-24 SCORPION	145	
SS-NX-25	146	
SS-NX-26	147	
SS-NX-28	148	

B - 704

DFI NAME
1622 TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
PENGUIN MK II	149	
GABRIEL I	150	
RGM-84 HARPOON	151	
BGM-109 TOMAHAWK	152	
PAMS	153	
HARPOON	154	
TLAM	155	
UNDEFINED	156 THROUGH 510	
RESET TO NO STATEMENT	511	

DFI NAME DEFINITION
1623 TYPE OF STORES AIR DELIVERABLE ORDNANCE.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 TYPE OF STORES, 1 [8 BIT]	LISTS ALL AIR DELIVERABLE ORDNANCE BY OPERATIONS ORDER.	J13.2C2
002 TYPE OF STORES, 2 [8 BIT]	LISTS ALL AIR DELIVERABLE ORDNANCE BY OPERATIONS ORDER.	J13.2C2
003 TYPE OF STORES, 3 [8 BIT]	LISTS ALL AIR DELIVERABLE ORDNANCE BY OPERATIONS ORDER.	J13.2C2
004 TYPE OF STORES, 4 [8 BIT]	LISTS ALL AIR DELIVERABLE ORDNANCE BY OPERATIONS ORDER.	J13.2C2
005 TYPE OF STORES [8 BIT]	LISTS ALL AIR DELIVERABLE ORDNANCE BY OPERATIONS ORDER.	J12.0C4
006 TYPE OF STORES, 5 [8 BIT]	LISTS ALL AIR DELIVERABLE ORDNANCE BY OPERATIONS ORDER.	J13.2C7
007 TYPE OF STORES, 6 [8 BIT]	LISTS ALL AIR DELIVERABLE ORDNANCE BY OPERATIONS ORDER.	J13.2C7
008 TYPE OF STORES, 7 [8 BIT]	LISTS ALL AIR DELIVERABLE ORDNANCE BY OPERATIONS ORDER.	J13.2C7
009 TYPE OF STORES, 8 [8 BIT]	LISTS ALL AIR DELIVERABLE ORDNANCE BY OPERATIONS ORDER.	J13.2C7

DATA ITEM	BIT CODE	EXPLANATION
-----------	----------	-------------

----- FOR DUIS 001-009 -----

NO STATEMENT	0
AIM-7 SPARROW	1
AIM-9 SIDEWINDER	2
AIM-54 PHOENIX	3
AGM-45 SHRIKE	4
AGM-65A MAVERICK (TV)	5
AGM-65B MAVERICK (TV)	6
AGM-65D MAVERICK (IR)	7

DFI NAME
1623 TYPE OF STORES

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
AGM-65E MAVERICK (LASER MAW)	8	
AGM-78	9	
AGM-88 HARM	10	
AIM-120 AMRAAM	11	
DISUSED	12	
DISUSED	13	
DISUSED	14	
BLU-27 NAPALM	15	
DISUSED	16	
MK-82 AIR	17	
MK-84 AIR	18	
CBU-24	19	
CBU-49	20	
DISUSED	21	
CBU-59/B ROCKEYE II	22	
DISUSED	23	
CBU-87 CEM	24	
CBU-89 GATOR	25	
CBU-90	26	
CBU-92	27	
CBU-93	28	
CBU-421A	29	
CBU-81B	30	
GBU-10 PAVEWAY I & II (MK-84)	31	
GBU-12 PAVEWAY I & II (MK-82)	32	
GBU-15(V)-4B	33	
GBU-22B	34	
DISUSED	35	
DISUSED	36	
DISUSED	37	
DISUSED	38	
DISUSED	39	
DISUSED	40	
MK-24	41	
MK-33	42	
MK-36 SEA MINE	43	
MK-45	44	
MK-77	45	

B-707

MIL-STD-6016B
APPENDIX B

DFI NAME
1623 TYPE OF STORES

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
MK-81SE	46	
MK-82 LD	47	
MK-82SE SNAKE EYE	48	
MK-83 GP 1000LB	49	
MK-84 LD 2000LB	50	
MK-117 750LB	51	
ROCKETS (2.75)	52	
DISUSED	53	
DISUSED	54	
AGM-62 WALLEYE	55	
AGM-62 WALLEYE I (E0)	56	
1000LB		
AGM-62 WALLEYE II (ER/	57	
DL) (E0) 2400LB		
SKY FLASH	58	
AIM-132 ASRAAM	59	
DISUSED	60	
DISUSED	61	
ASLAM	62	
R530	63	
DISUSED	64	
S530 SUPER 530F	65	
ASPIDE	66	
DISUSED	67	
SHAFRIR	68	
DISUSED	69	
DISUSED	70	
DISUSED	71	
AGM-12 BULLPUP	72	
DISUSED	73	
AGM-84 HARPOON	74	
AGM-86C/D CALCM	75	
MK-86 (BOMB)	76	
CBU-BL 755	77	
MW1-KB 44-TOR	78	
MW1-MKSA-TOR	79	
KORMORAN	80	
BLU-1	81	
CBU-2 C/A	82	
M 116 A1/A2	83	
DISUSED	84	

B-708

MIL-STD-6016B
APPENDIX B

DFI NAME
1623 TYPE OF STORES

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
FLARE-TP 400	85	
FLARE-ALE 40	86	
CHF-ALE-40/4	87	
SEA EAGLE	88	
R550 MAGIC I	89	
R550 MAGIC II	90	
MICA EM	91	
SUPER 530D (S530D)	92	
DISUSED	93	
BDU-33 (PRACTICE BOMB)	94	
BDU-48 (PRACTICE BOMB)	95	
BDU-48 (PRACTICE MINE)	96	
CRV-7 UNGUIDED ROCKET	97	
MK-76	98	
MK-106 (PRACTICE BOMB)	99	
BL-755	100	
CBU-78 GATOR MINE	101	
GBU-16	102	
GBU-24	103	
GBU-27 (LG BLU-109)	104	
GBU-28 (LG BLU-113)	105	
LGTR	106	
JSOW (TRAINING)	107	
AGM-154 JSOW (BLU-97)	108	
AGM-154 JSOW (BLU-108)	109	
AGM-154 JSOW (UNITARY)	110	
JDAM (TRAINING)	111	
GBU-31 JDAM (BLU-109)	112	
GBU-31 JDAM (MK-84)	113	
AGM-65F MAVERICK (IR MAW)	114	
AGM-65G MAVERICK (IR MAW)	115	
AGM-84E SLAM	116	
AGM-84H SLAM-ER	117	
ATM-84 HARPOON (TRAINING)	118	
TALD	119	
LUU-2	120	
MJU-27	121	
MJU-37	122	

B-709

MIL-STD-6016B
APPENDIX B

DFI NAME
1623 TYPE OF STORES

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
MK-58	123	
MK-40 SEA MINE (1000LB)	124	
MK-41 SEA MINE (2000LB)	125	
MK-52 SEA MINE (1200LB)	126	
MK-55 SEA MINE (2100LB)	127	
MK-56 SEA MINE (2200LB)	128	
DISUSED	129	
DISUSED	130	
MK-63	131	
MK-64 SEA MINE	132	
MK-65 SEA MINE	133	
DISUSED	134	
DISUSED	135	
M129 2000LB LEAFLET/ CHAFF	136	
AIM-9X HIGH OFF- BORESIGHT	137	
IRIS-T (AIM SHORT RANGE)	138	
BDU-50 (PRACTICE BOMB)	139	
BLU-109 2000LB PENETRATOR	140	
MATRA-250 AG	141	
MC-1 AG	142	
AGM-130 POWERED STANDOFF WEAPON	143	
AGM-142 HAVE NAP	144	
AGM-158 JASSM	145	
CBU-103 WCMD-CEM	146	
CBU-104 WCMD-GATOR	147	
CBU-105 WCMD-SFW	148	
GBU-37 GAM 5000LB	149	
MICA IR	150	
AS30 LASER	151	
GBU-XX PAVEWAY II (MK-81)	152	
KORMORAN II	153	
CBU-97 SFW	154	
EGBU-27	155	
EGBU-28	156	
UNDEFINED	157 THROUGH 255	

B - 710

MIL-STD-6016B
APPENDIX B

DFI NAME DEFINITION
1624 GUN CAPABLE INDICATES THE CAPABILITY OF AN AIRBORNE WEAPON SYSTEM TO USE ITS CANNON FOR COMBAT PURPOSES.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 GUN CAPABLE [1 BIT] (GUN CAP)	INDICATES THE CAPABILITY OF AN AIRBORNE WEAPON SYSTEM TO USE ITS CANNON FOR COMBAT PURPOSES.	J13.2C2

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
GUN CAPABLE	1	AT LEAST ONE PASS AVAILABLE.

DFI NAME
1625 LINK/STATUS

DEFINITION
INDICATES THE AVAILABILITY OF SPECIFIED LINKS.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 NATO LINK 1 STATUS [2 BIT] (NL1 STS)	INDICATES THE AVAILABILITY OF NATO LINK 1.	J13.5C1
002 LINK 14 STATUS [2 BIT] (L14 STS)	INDICATES THE AVAILABILITY OF LINK 14.	J13.2C5 J13.5C1
003 LINK 11 STATUS [3 BIT]	INDICATES THE AVAILABILITY OF LINK 11.	J13.2C5 J13.5C1
004 LINK 11B STATUS [2 BIT] (TB STS)	INDICATES THE AVAILABILITY OF LINK 11B.	J13.5C1
005 LINK 16 STATUS [3 BIT]	INDICATES THE AVAILABILITY OF LINK 16.	J13.2C5 J13.5C1
006 ATDL 1 STATUS [2 BIT] (ATDL STS)	INDICATES THE AVAILABILITY OF ATDL 1.	J13.5C1
007 IJMS STATUS [2 BIT] (IJMS STS)	INDICATES THE AVAILABILITY OF IJMS.	J13.2C5 J13.5C1
008 LINK 4 STATUS [2 BIT] (L4 STS)	INDICATES THE AVAILABILITY OF LINK 4.	J13.2C5
009 LINK 16 CONTROL STATUS [2 BIT] (JCN STS)	INDICATES WHETHER THE REFERENCE TN IS BEING CONTROLLED VIA LINK 16.	J13.2C6
010 LINK 4A CONTROL STATUS [2 BIT] (CCN STS)	INDICATES WHETHER THE REFERENCE TN IS BEING CONTROLLED VIA LINK 4A.	J13.2C6
011 LINK 4C STATUS [2 BIT] (4C STS)	INDICATES WHETHER THE REFERENCE TN IS OPERATING ON LINK 4C (FIGHTER-TO-FIGHTER LINK 4A).	J13.2C6
012 NONC2 JU-TO-NONC2 JU NPG STATUS A [1 BIT] (NON STS A)	INDICATES NPG STATUS WHEN THE SOURCE TN IS OPERATING ON THE LINK 16 NONC2 JU-TO-NONC2 JU NPG, A.	J2.2I

APPENDIX B

DFI NAME
1625 LINK/STATUS

DUI NAME	EXPLANATION	APPLICABILITY
012 (CONTINUED)	APPLIES ONLY WHEN NONC2 JU-TO- NONC2 JU NPG NET NUMBER IS SET TO VALUE 0-126.	
013 NONC2 JU-TO-NONC2 JU NPG STATUS B [1 BIT] (NON STS B)	INDICATES NPG STATUS WHEN THE SOURCE TN IS OPERATING ON THE SECONDARY LINK 16 NONC2 JU-TO-NONC2 JU NPG. APPLIES ONLY WHEN NONC2 JU-TO- NONC2 JU NPG NET NUMBER IS SET TO VALUE 0-126.	J2.2C5
014 VMF STATUS [2 BIT] (VMF STS)	INDICATES THE AVAILABILITY OF VMF.	J13.2C6

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001, 002, 004, 006, 007, AND 014 -----		
NO STATEMENT	0	
NOT AVAILABLE	1	
DEGRADED	2	
AVAILABLE	3	
----- FOR DUIS 003 AND 005 -----		
NO STATEMENT	0	
AVAILABLE VIA LOCAL BUFFER	1	
AVAILABLE VIA REMOTE BUFFER	2	
AVAILABLE VIA LOCAL AND REMOTE BUFFER	3	
DEGRADED	4	
NOT AVAILABLE	5	
UNDEFINED	6 THROUGH 7	
----- FOR DUI 008 -----		
NO STATEMENT	0	
NOT AVAILABLE	1	
AVAILABLE	2	

DFI NAME
1625 LINK/STATUS

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
UNDEFINED	3	
----- FOR DUI 009 AND 010 -----		
NO STATEMENT	0	
UNDER CONTROL	1	
NOT UNDER CONTROL	2	
UNDEFINED	3	
----- FOR DUI 011 -----		
NO STATEMENT	0	
ACTIVE	1	
INACTIVE	2	
UNDEFINED	3	
----- FOR DUIS 012 AND 013 -----		
ACTIVE	0	
INACTIVE	1	

DFI	NAME	DEFINITION
1626	MISSION ASSIGNMENT	SPECIFIES WHAT MISSION IS TO BE PERFORMED.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 MISSION ASSIGNMENT DISCRETE [6 BIT]	SPECIFIES WHAT MISSION IS TO BE PERFORMED.	J12.0I

DATA ITEM	BIT CODE	EXPLANATION
-----------	----------	-------------

----- FOR DUI 001 -----

NO STATEMENT	0
REFUEL	1
ORBIT	2
RECALL	3
RETURN TO BASE	4
ENGAGE	5
PRIORITY KILL	6
BREAK ENGAGEMENT	7
INVESTIGATE/INTERROGATE	8
CLEAR TO DROP	9
CEASE/DO NOT DROP	10
INTERVENE	11
DIVERT	12
AIR-TO-SURFACE	13
AIR-TO-AIR	14
SEARCH AND RESCUE	15
COMBAT AIR PATROL	16
PRECISION BOMBING	17
LASER DESIGNATION	18
BEACON BOMBING	19
CLOSE AIR SUPPORT	20
INTERDICTION	21
AERIAL RECONNAISSANCE	22
ESCORT	23
SHADOW	24
WEAPONS FREE	25
WEAPONS TIGHT	26
SALVO/CLEAR AIRCRAFT	27
ALERT CONDITION WHITE	28
ALERT CONDITION YELLOW	29
ALERT CONDITION RED	30
COVER	31

B-715

DFI NAME
1626 MISSION ASSIGNMENT

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
VISUAL IDENTIFICATION	32	
DISUSED	33	
GO TO VOICE	34	
HIGH INTEREST TRACK DESIGNATION	35	
CANCEL HIGH INTEREST TRACK DESIGNATION	36	
SENSOR TARGET REPORTS ON	37	
SENSOR TARGET REPORTS OFF	38	
SUPPRESSION OF ENEMY AIR DEFENSES	39	
ARMED RECONNAISSANCE	40	
ATTACK	41	
CEASE ATTACK	42	
RELATED MISSION DATA	43	
COUNTER AIR ATTACK	44	
FIGHTER SWEEP	45	
CEASE FIRE	46	
HOLD FIRE	47	
UNDEFINED	48 THROUGH 62	
CEASE MISSION	63	

B-716

MIL-STD-6016B
APPENDIX B

DFI NAME
1627 TRACKING STATUS

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 TRACKING STATUS [2 BIT] (TKNG STAT)	INDICATES THE TRACKING STATUS.	J9.1I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
NOT UNDER TRACK	1	TN SOURCE DOES NOT HAVE TN OBJECTIVE UNDER TRACK.
TN OBJECTIVE UNDER TRACK	2	TN SOURCE IS TRACKING TN OBJECTIVE.
UNDEFINED	3	

DFI NAME DEFINITION
1628 BEACON CODE

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 BEACON CODE [6 BIT]		J12.0C5

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
CODING TO BE DETERMINED	0 THROUGH 63	

DFI NAME DEFINITION
1641 EMERGENCY TYPE INDICATES THE TYPE OF EMERGENCY BEING REPORTED.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 EMERGENCY TYPE [4 BIT]	INDICATES THE TYPE OF EMERGENCY THAT IS BEING REPORTED IN THE MESSAGE.	J3.1I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT/OTHER	0	
DOWN AIRCRAFT	1	
MAN IN WATER	2	
DITCHING	3	
BAILOUT	4	
DISTRESSED VESSEL	5	
UNDEFINED	6 THROUGH 15	

DFI NAME DEFINITION
1642 POSITION ACCURACY INDICATES THE RELATIVE ACCURACY OF THE EMERGENCY POSITION
BEING REPORTED IN TERMS OF THE RADIUS OF A CIRCLE MEASURED
OUTWARD FROM THE POSITION IN DATA MILES.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 POSITION ACCURACY [3 BIT]	INDICATES THE RELATIVE ACCURACY OF THE EMERGENCY POSITION BEING RE- PORTED IN TERMS OF THE RADIUS OF A CIRCLE MEASURED OUTWARD FROM THE POSITION IN DATA MILES.	J3.1E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
1/4 DATA MILE OR LESS	1	
1 DATA MILE OR LESS	2	
5 DATA MILES OR LESS	3	
20 DATA MILES OR LESS	4	
50 DATA MILES OR LESS	5	
GREATER THAN 50 DATA MILES	6	
LAST KNOWN POSITION	7	

B-720

MIL-STD-6016B
APPENDIX B

DFI NAME
1643 PERSONNEL INVOLVED

DEFINITION
INDICATES AN ESTIMATE OF THE NUMBER OF PERSONNEL REQUIRING
SEARCH AND RESCUE IN CONNECTION WITH THE EMERGENCY BEING
REPORTED.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 PERSONNEL INVOLVED [4 BIT]	INDICATES AN ESTIMATE OF THE NUMBER OF PERSONNEL REQUIRING SEARCH AND RESCUE IN CONNECTION WITH THE EMERGENCY BEING REPORTED.	J3.1I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
PERSONNEL INVOLVED	1 THROUGH 12	
FEW (2 THROUGH 7) PERSONNEL INVOLVED	13	
MANY (>7 AND < OR = TO 12) PERSONNEL INVOLVED	14	
GREATER THAN 12 PERSONNEL INVOLVED	15	

B-721

MIL-STD-6016B
APPENDIX B

APPENDIX B

DFI	NAME	DEFINITION
1645	END POINT INDICATOR	INDICATES THAT THE POINT TRANSMITTED IN THE MESSAGE IS OR IS NOT THE END POINT IN A SEQUENCE OF POINTS.

DATA STANDARD USAGE: Link 16	STATUS:
------------------------------	---------

DUI NAME	EXPLANATION	APPLICABILITY
002 END POINT, 1 [1 BIT] (END PT1)	THIS FIELD IS USED TO INDICATE THAT THE ASSOCIATED POSITION DESCRIBED IN THE MESSAGE IS AN END POINT OF A SEGMENTED LINE OR IS THE LAST POINT TRANSMITTED TO FORM A MULTI-SIDED AREA.	J3.0C1 J7.6C2
003 END POINT, 2 [1 BIT] (END PT2)	THIS FIELD IS USED TO INDICATE THAT THE ASSOCIATED POSITION DESCRIBED IN THE MESSAGE IS AN END POINT OF A SEGMENTED LINE OR IS THE LAST POINT TRANSMITTED TO FORM A MULTI-SIDED AREA.	J3.0C1 J7.6C2

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 002 AND 003 -----		
NO STATEMENT	0	
END POINT	1	THE ASSOCIATED LATITUDE/LONGITUDE OR DELTA LATITUDE/DELTA LONGITUDE FIELDS DESCRIBE A POINT THAT IS THE END POINT OF A SEGMENTED LINE OR IS COINCIDENT WITH THE INITIAL POINT TRANSMITTED IN A PREVIOUS MESSAGE TO FORM A MULTI-SIDED AREA THAT IS NOT A SQUARE OR A RECTANGLE. SQUARES AND RECTANGLES ARE DESCRIBED USING THE SQUARE/CIRCLE SWITCH, AREA MAJOR AXIS, AREA MINOR AXIS AND AXIS ORIENTATION FIELDS.

DFI NAME DEFINITION
1646 BAILOUT INDICATOR AN INDICATION OF PERSONNEL EGRESS FROM AN AIRCRAFT.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 BAILOUT INDICATOR [1 BIT] (BLT IND)	INDICATES PILOT/CREW EGRESS FROM AN AIRCRAFT.	J2.2I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
BAILED OUT	1	

DFI NAME DEFINITION
1647 CONTROL CHANGE ACTION PROVIDES THE MEANS TO DIRECT OR CONFIRM A CHANGE OF CONTROL.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 CONTROL CHANGE INDICATOR [2 BIT] (CNT CHG)	PROVIDES THE MEANS TO CHANGE THE CONTROLLING AGENCY OF A CONTROLLED JU.	J12.4I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
CONTROL CHANGE ORDER	0	CONTROLLING AGENCY ORDERS ADDRESSEE TN TO CHANGE TO NEW CONTROLLING AGENCY.
CONTROL REQUEST	1	SOURCE TN REQUEST ADDRESSEE TN TO ASSUME CONTROL OF SOURCE TN.
TERMINATE CONTROL	2	CONTROLLING AGENCY TERMINATES CONTROL OF ADDRESSEE TN.
UNDEFINED	3	

DFI NAME DEFINITION
1648 RADIO TYPE SPECIFIES THE TYPE OF RADIO.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 RADIO TYPE [3 BIT]	SPECIFIES THE TYPE OF RADIO.	J10.3C1 J12.4I
002 RADIO TYPE, 1 [3 BIT]	SPECIFIES THE TYPE OF RADIO.	J13.2C1
003 RADIO TYPE, 2 [3 BIT]	SPECIFIES THE TYPE OF RADIO.	J13.2C1
004 RADIO TYPE, 3 [3 BIT]	SPECIFIES THE TYPE OF RADIO.	J13.2C1

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001-004 -----		
NO STATEMENT	0	
UHF-AM	1	
VHF-AM	2	
VHF-FM	3	
HF-SSB UPPER	4	
HF	5	
UHF-FM	6	
HF-SSB LOWER	7	

APPENDIX B

DFI	NAME	DEFINITION
1649	RADIO SECURE MODE INDICATOR	AN INDICATION OF WHETHER THE RADIO IS OPERATING, OR IS DIRECTED TO OPERATE IN THE SECURE MODE.
DATA STANDARD USAGE: Link 16		STATUS:
DUI NAME	EXPLANATION	APPLICABILITY
001 SECURE RADIO INDICATOR [1 BIT] (SEC IND)	SPECIFIES WHETHER OR NOT A RADIO IS OPERATING IN THE SECURE MODE.	J9.0C1 J10.3C1 J12.4I
002 SECURE RADIO INDICATOR, 1 [2 BIT] (SEC 1)	SPECIFIES WHETHER OR NOT A RADIO IS OPERATING IN THE SECURE MODE.	J13.2C1
003 SECURE RADIO INDICATOR, 2 [2 BIT] (SEC 2)	SPECIFIES WHETHER OR NOT A RADIO IS OPERATING IN THE SECURE MODE.	J13.2C1
004 SECURE RADIO INDICATOR, 3 [2 BIT] (SEC 3)	SPECIFIES WHETHER OR NOT A RADIO IS OPERATING IN THE SECURE MODE.	J13.2C1
DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
RADIO IN SECURE MODE	1	
----- FOR DUIS 002-004 -----		
NO STATEMENT	0	
SECURE	1	
NOT SECURE	2	
UNDEFINED	3	

DFI NAME DEFINITION
1650 SQUAWK FLASH INDICATOR DIRECTS THE PILOT TO SQUAWK FLASH.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 SQUAWK FLASH INDICATOR [1 BIT] (SQK FLS)	DIRECTS THE PILOT TO SQUAWK FLASH.	J10.3C1 J12.4E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
SQUAWK FLASH	1	

DFI NAME DEFINITION
1651 VECTOR DISCRETE DISCRETES TO ADVISE OR DIRECT A PILOT.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 VECTOR DISCRETE [6 BIT]	DISCRETES TO ADVISE OR DIRECT A PILOT.	J12.1I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
TO WAYPOINT	1	
ALTITUDE CHANGE WARNING	2	
SPEED CHANGE WARNING	3	
COURSE CHANGE WARNING	4	
COMMAND CONTROL	5	
UNDEFINED	6	
REVERT TO VOICE	7	
LANDING CHECKLIST	8	
COMMAND COURSE CHANGE	9	
COMMAND ALTITUDE CHANGE	10	
COMMAND SPEED CHANGE	11	
BUG-OUT HEADING	12	
CV RECOVERY CASE I	13	
CV RECOVERY CASE II	14	
CV RECOVERY CASE III	15	
FIELD CONDITION VMC	16	
FIELD CONDITION IMC	17	
JOIN UP/RENDEZVOUS	18	
NOT UNDER COMMAND	19	
UNDEFINED	20	
VISUAL/ID TARGET VECTOR	21	
COLLISION/CUT OFF VECTOR	22	
PURSUIT VECTOR	23	
STERN VECTOR	24	
ORBIT VECTOR	25	
REFUEL VECTOR	26	
UNDEFINED	27 THROUGH 63	

DFI NAME DEFINITION
1652 COMMUNICATIONS IMPAIRMENT DEFINES THE COMMUNICATIONS COMPONENT THAT IS CAUSING THE
PLATFORM TO BE LESS THAN FULLY OPERATIONAL.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 COMMUNICATIONS IMPAIRMENT [3 BIT] (COM IMP)	DEFINES THE COMMUNICATIONS COMPONENT THAT IS CAUSING THE PLATFORM TO BE LESS THAN FULLY OPERATIONAL.	J13.2C5 J13.5C1

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
UHF-AM	1	
VHF-AM	2	
VHF-FM	3	
HF-SSB UPPER	4	
HF	5	
UHF-FM	6	
HF-SSB LOWER	7	

DFI NAME DEFINITION
1657 POINT INDICATOR INDICATES A POINT IS FIRST, INTERMEDIATE, OR LAST IN A SERIES OF POINTS.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 POINT NUMBER [2 BIT]	THIS FIELD DEFINES THE POINT BEING DESCRIBED AS A START OR STOP POINT IN A SERIES OF POINTS. A NO STATEMENT VALUE INDICATES ONLY ONE POINT IS BEING DESCRIBED OR THE POINT BEING DESCRIBED IS IN BETWEEN A START POINT AND A STOP POINT IN A SERIES OF POINTS.	J12.0C3

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
START POINT	1	
STOP POINT	2	
UNDEFINED	3	

DFI NAME DEFINITION
1658 MODE OF DELIVERY

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 MODE OF DELIVERY [7 BIT]		J12.0C4

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
CODING TO BE DETERMINED	0 THROUGH 127	

DFI NAME DEFINITION
1659 TIME AMPLIFIER VALUES THAT AMPLIFY OR DESCRIBE TIME.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 TIME DISCRETE [3 BIT]	VALUES THAT AMPLIFY OR DESCRIBE THE HOUR AND MINUTE FIELD APPLICATION.	J12.0C4

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
TIME ON TARGET	1	
ILLUMINATION ON	2	
INITIAL POINT TIME	3	
CHANGED TIME ON TARGET	4	
UNDEFINED	5 THROUGH 7	

DFI NAME DEFINITION
1660 DELTA ELEVATION THE DIFFERENCE IN VERTICAL DISTANCE BETWEEN A BEACON AND
TARGET

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 DELTA ELEVATION [15 BIT]	THE DIFFERENCE IN VERTICAL DISTANCE FROM A BEACON TO A TARGET.	J12.0C5

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
0 THROUGH 16,383 FEET NO STATEMENT -16,383 THROUGH -1 FEET	0 THROUGH 16383 16384 16385 THROUGH 32767	IN ONE FOOT INCREMENTS.

DFI NAME DEFINITION
1661 AIRCRAFT MODEL AN ALPHA CHARACTER SUFFIX USED TO DESIGNATE A CERTAIN VERSION
OF AN ALPHA/NUMERIC AIRCRAFT DESIGNATOR.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 AIRCRAFT MODEL [5 BIT]	AN ALPHA CHARACTER SUFFIX USED TO DESIGNATE A CERTAIN VERSION OF AN ALPHA/NUMERIC AIRCRAFT DESIGNATOR.	J13.2C1
002 TYPE MODIFICATION [5 BIT]	AN ALPHA CHARACTER SUFFIX USED TO DESIGNATE A CERTAIN VERSION OF AN ALPHA/NUMERIC AIRCRAFT DESIGNATOR.	J6.0E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 AND 002 -----		
NO STATEMENT	0	
A	1	
B	2	
C	3	
D	4	
E	5	
F	6	
G	7	
H	8	
I	9	
J	10	
K	11	
L	12	
M	13	
N	14	
O	15	
P	16	
Q	17	
R	18	
S	19	
T	20	
U	21	
V	22	
W	23	
X	24	
Y	25	

DFI NAME
1661 AIRCRAFT MODEL

DATA ITEM (CONTINUED)
Z
ILLEGAL

BIT CODE
26
27 THROUGH 31

EXPLANATION

DFI NAME DEFINITION
1663 IDENTITY CONFIDENCE

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
001 IDENTITY CONFIDENCE [4 BIT] (ID CON)		J3.2I	J3.3I	J3.5I
		J3.7C1	J7.0I	
DATA ITEM	BIT CODE	EXPLANATION		
----- FOR DUI 001 -----				
UNDEFINED	0 THROUGH 15			

DFI	NAME	DEFINITION
1664	EQUIPMENT STATUS INDICATOR	PROVIDES INDICATION OF OPERATIONAL EQUIPMENT.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 RADAR STATUS INDICATOR [1 BIT] (RDR STS)		J13.2C3
002 ELECTRONIC WARFARE SUPPORT, STATUS [1 BIT] (ES STS)		J13.2C3
003 INFRARED STATUS INDICATOR [1 BIT] (IR STS)		J13.2C3
004 LOW FREQUENCY ANALYSIS AND RECORDING STATUS [1 BIT] (LOF)		J13.2C3
005 MAGNETIC ANOMALY DETECTOR STATUS [1 BIT] (MAD)		J13.2C3
006 SEARCH LIGHT STATUS [1 BIT] (SCH LGT)		J13.2C3
007 LOW LIGHT LEVEL TELEVISION STATUS [1 BIT] (LTV)		J13.2C3
008 DIFAR/CODAR STATUS [1 BIT] (DIF COD)		J13.2C3
009 ACTIVE SONOBUOY STATUS [1 BIT] (ACT SON)		J13.2C3
010 RECORDER STATUS, 1 [1 BIT] (REC 1)		J13.2C3
011 RECORDER STATUS, 2 [1 BIT] (REC 2)		J13.2C3
012 RECORDER STATUS, 3 [1 BIT] (REC 3)		J13.2C3

DFI NAME
1664 EQUIPMENT STATUS INDICATOR

DUI NAME	EXPLANATION	APPLICABILITY
013 RECORDER STATUS, 4 [1 BIT] (REC 4)		J13.2C3
014 SONAR STATUS [1 BIT] (SON)		J13.2C3
015 SPECIAL SONOBUOY STATUS, 1 [1 BIT] (SS 1)		J13.2C3
016 SPECIAL SONOBUOY STATUS, 2 [1 BIT] (SS 2)		J13.2C3
017 SPECIAL PROCESSOR STATUS, 1 [1 BIT] (SP 1)		J13.2C3
018 SPECIAL PROCESSOR STATUS, 2 [1 BIT] (SP 2)		J13.2C3

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001-018 -----		
NO STATEMENT	0	
EQUIPMENT IS OPERATIONAL	1	

DFI NAME DEFINITION
 1665 EQUIPMENT STATUS DESCRIBES THE OPERATIONAL STATUS OF SPECIAL EQUIPMENT.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 RADAR STATUS [2 BIT] (RDR STS)	DESCRIBES THE OPERATING STATUS OF A RADAR.	J13.2C1
002 INFRARED STATUS [2 BIT] (IR)	DESCRIBES THE OPERATING STATUS OF AN INFRARED SYSTEM.	J13.2C1
003 IFF/SIF TRANSPONDER STATUS [2 BIT] (IFF TNP)	DESCRIBES THE OPERATING STATUS OF AN IFF/SIF TRANSPONDER.	J13.2C2
004 IFF/SIF INTERROGATOR STATUS [2 BIT] (IFF INT)	DESCRIBES THE OPERATING STATUS OF AN IFF/SIF INTERROGATOR.	J13.2C2 J13.5C1
005 LASER STATUS [2 BIT] (LSR STS)	DESCRIBES THE OPERATING STATUS OF A LASER DESIGNATOR.	J13.2C1
006 TELEVISION STATUS [2 BIT] (TV STS)	DESCRIBES THE OPERATING STATUS OF A TELEVISION.	J13.2C1
007 RADAR WARNING AND RECEIVING STATUS [2 BIT] (RWR)	DESCRIBES THE OPERATING STATUS OF A RADAR WARNING AND RECEIVING SET.	J13.2C1
008 AIR-TO-AIR WEAPON RELEASE SYSTEM STATUS [2 BIT] (A/A WRS)	DESCRIBES THE OPERATING STATUS OF AN AIR-TO-AIR WEAPON RELEASE SYSTEM.	J13.2C1
009 AIR-TO-GROUND WEAPON RELEASE SYSTEM STATUS [2 BIT] (A/G WRS)	DESCRIBES THE OPERATING STATUS OF AN AIR-TO-GROUND WEAPON RELEASE SYSTEM.	J13.2C1
010 PRIMARY SURVEILLANCE RADAR STATUS [2 BIT] (PSR STS)	DESCRIBES THE OPERATING STATUS OF A PRIMARY SURVEILLANCE RADAR SYSTEM.	J13.5C1
011 SECONDARY SURVEILLANCE RADAR STATUS [2 BIT] (SSR STS)	DESCRIBES THE OPERATING STATUS OF A SECONDARY SURVEILLANCE RADAR SYSTEM.	J13.5C1

DFI NAME
1665 EQUIPMENT STATUS

DUI NAME	EXPLANATION	APPLICABILITY
012 TERTIARY SURVEILLANCE RADAR STATUS [2 BIT] (TSR STS)	DESCRIBES THE OPERATING STATUS OF A TERTIARY SURVEILLANCE SYSTEM.	J13.5C1
013 ACQUISITION RADAR STATUS [2 BIT] (AQR STS)	DESCRIBES THE OPERATING STATUS OF AN ACQUISITION RADAR SYSTEM.	J13.5C1
014 ILLUMINATING RADAR STATUS [1 BIT] (ILR STS)	DESCRIBES THE OPERATING STATUS OF AN ILLUMINATING RADAR SYSTEM.	J13.5C1
015 MODE IV INTERROGATOR STATUS [1 BIT] (M4 INT)	DESCRIBES THE OPERATING STATUS OF A MODE IV INTERROGATOR SYSTEM.	J13.2C5 J13.5C1
016 COMMAND AND CONTROL SYSTEM [2 BIT] (C2 SYS)	INDICATES THE STATUS OF DATA DISPLAY GROUP, DATA PROCESSING EQUIPMENT, DIGITAL DATA SWITCHBOARDS, INTERFACE EQUIPMENT, DIGITAL DATA COMMUNICATIONS, COMMAND AND CONTROL TESTING, AND COMMAND AND CONTROL ANALOG SWITCHBOARDS.	J13.3C2 J13.4C2
017 DATA LINK AND DISPLAY SYSTEM [2 BIT] (DL SYS)	INDICATES THE STATUS OF ALL DATA LINK AND VISUAL DISPLAY COMPONENTS AND RELATED SYSTEMS.	J13.3C2 J13.4C2
018 NAVIGATION SYSTEM [2 BIT] (NAV SYS)	INDICATES THE STATUS OF A UNIT'S ELECTRONIC AND ELECTRICAL NAVIGATION AIDS, RADIO, ACOUSTICAL, OPTICAL, COMPASS, AND INERTIAL NAVIGATION SYSTEMS.	J13.3C2 J13.4C2
019 COMMUNICATION SYSTEM [2 BIT] (COMM SYS)	INDICATES THE STATUS OF RADIOS, UNDERWATER, VISUAL, AUDIBLE, TELEMETRY, TELETYPE, FACSIMILE, AND ALL SATELLITE COMMUNICATIONS RELATED SYSTEMS AND TELECOMMUNICATIONS SECURITY EQUIPMENT.	J13.3C2 J13.4C2
020 SURFACE SEARCH RADAR [2 BIT] (SS RAD)	INDICATES THE STATUS OF SEARCH AND NAVIGATIONAL RADAR AND THEIR	J13.3C2 J13.4C2

B-740

APPENDIX B

MIL-STD-6016B

DFI NAME
1665 EQUIPMENT STATUS

DUI NAME	EXPLANATION	APPLICABILITY
020 (CONTINUED)	COMPONENTS.	
021 2D AIR SEARCH RADAR [2 BIT] (2D RAD)	INDICATES THE STATUS OF TWO-DIMENSIONAL AIR SEARCH RADAR AND THEIR COMPONENTS.	J13.3C2
022 3D AIR SEARCH RADAR [2 BIT] (3D RAD)	INDICATES THE STATUS OF THREE-DIMENSIONAL AIR SEARCH RADAR AND THEIR COMPONENTS.	J13.3C2
023 PRECISION APPROACH RADAR [2 BIT] (PAP RAD)	INDICATES THE STATUS OF PRECISION APPROACH RADAR AND THEIR COMPONENTS.	J13.3C2
024 IFF/SIF INTERROGATOR AND TRANSPONDER SYSTEM [2 BIT] (IFF SIF)	INDICATES THE STATUS OF THE IFF/SIF TRANSPONDER AND INTERROGATOR, INCLUDING MODE 4 AND THE IDENTIFICATION SYSTEM.	J13.3C2 J13.4C2
025 SONAR SYSTEM [2 BIT] (SON)	INDICATES THE STATUS OF ACTIVE, PASSIVE, AND CLASSIFICATION SONARS. INCLUDES HULL MOUNTED, VARIABLE DEPTH SONAR, PASSIVE ARRAY SYSTEMS, AND ACOUSTIC ANALYSIS AND DISPLAY SYSTEMS.	J13.3C2
026 ELECTRONIC ATTACK [2 BIT] (EA)	INDICATES THE STATUS OF ELECTRONIC ATTACK, ELECTRONIC PROTECTION, ACTIVE AND PASSIVE SYSTEMS.	J13.3C2
027 ELECTRONIC WARFARE SUPPORT AND OTHER ELECTRONIC ATTACK [2 BIT] (ES)	INDICATES THE STATUS OF ELECTRONIC WARFARE SUPPORT AND ACOUSTIC WARFARE SYSTEMS. INCLUDES ACM, ACCM, ACSM, MECHANICAL EQUIPMENT, PASSIVE EQUIPMENT, DEGAUSSING EQUIPMENT, AND MINE COUNTERMEASURES SYSTEMS.	J13.3C2 J13.4C2
028 GUN FIRE CONTROL SYSTEM [2 BIT] (GFCS)	INDICATES THE STATUS OF THE GUN FIRE CONTROL SYSTEM. INCLUDES SIGHTS, DIRECTORS, STABILIZER AND FIRE	J13.3C2

DFI NAME
1665 EQUIPMENT STATUS

DUI NAME	EXPLANATION	APPLICABILITY
028 (CONTINUED)	CONTROL/TARGET TRACKING EQUIPMENT, BUT NOT THE AMMUNITION OR GUN.	
029 GUNS [2 BIT]	INDICATES THE STATUS OF THE GUNS, BARRELS, MOUNTS, AND CARRIAGES.	J13.3C2
030 MISSILE, ROCKET, AND LAUNCHERS [2 BIT] (MISS RKT)	INDICATES THE STATUS OF MISSILES AND ROCKETS OTHER THAN SURFACE-TO-AIR AND CRUISE MISSILES. INCLUDES THE LAUNCHER, CRADLE, DEFLECTORS, ETC., FOR THESE WEAPONS.	J13.3C2
031 CRUISE MISSILES [2 BIT] (CRU MISS)	INDICATES THE STATUS OF CRUISE MISSILES, INCLUDING TOMAHAWK AND HARPOON.	J13.3C2
032 EMBARKED ASSAULT CRAFT [2 BIT] (ASLT CFT)	INDICATES THE STATUS OF ASSAULT CRAFT EMBARKED.	J13.3C2
033 ENERGY GENERATION SYSTEM- NUCLEAR [2 BIT] (GEN NUC)	INDICATES THE STATUS OF THE NUCLEAR ENERGY GENERATION SYSTEM. INCLUDES THE REACTOR PLANT, COOLANT CONTROLS, INSTRUMENTATION, AND SHIELDING.	J13.3C2 J13.4C2
034 ENERGY GENERATION SYSTEM- CONVENTIONAL [2 BIT] (GEN CONV)	INDICATES THE STATUS OF THE NON- NUCLEAR ENERGY GENERATION SYSTEM. INCLUDES PROPULSION BOILERS, GAS GENERATORS, MAIN PROPULSION BATTERIES, AND MAIN PROPULSION FUEL CELLS.	J13.3C2 J13.4C2
035 AIRCRAFT HANDLING, LAUNCH, AND RECOVERY SYSTEMS [2 BIT] (A/C HAND)	INDICATES THE STATUS OF SYSTEMS RELATED TO AIRCRAFT HANDLING. INCLUDES LAUNCH SUPPORT SYSTEMS: CATAPULTS, BLAST DEFLECTORS, HOLDBACK GEAR; RECOVERY SUPPORT SYSTEMS: ARRESTING GEAR, BARRICADE, LSO PLATFORM; AND OTHER AIRCRAFT SUPPORT SYSTEMS: CRANES, HOISTS, ELEVATORS, STANCHIONS.	J13.3C2

B-742

MIL-STD-6016B
APPENDIX B

DFI NAME
1665 EQUIPMENT STATUS

DUI NAME	EXPLANATION	APPLICABILITY
036 FIGHTER AIRCRAFT [2 BIT] (FTR A/C)	INDICATES THE FULL MISSION CAPABLE AVAILABILITY OF AIRCRAFT WHOSE MISSION IS FIGHTER OR INTERCEPTOR.	J13.3C2
037 ATTACK, STRIKE/FIGHTER AIRCRAFT [2 BIT] (ATK A/C)	INDICATES THE FULL MISSION CAPABLE AVAILABILITY OF AIRCRAFT WHOSE MISSION IS ATTACK OR COMBINED FIGHTER ATTACK.	J13.3C2
038 FIXED WING ANTI-SUBMARINE WARFARE AIRCRAFT [2 BIT] (ASW A/C)	INDICATES THE FULL MISSION CAPABLE AVAILABILITY OF FIXED WING AIRCRAFT WHOSE MISSION IS ASW.	J13.3C2
039 HELICOPTER ANTI-SUBMARINE WARFARE AIRCRAFT [2 BIT] (HELO ASW)	INDICATES THE FULL MISSION CAPABLE AVAILABILITY OF HELICOPTER AIRCRAFT WHOSE MISSION IS ASW.	J13.3C2
040 AIRBORNE EARLY WARNING AIRCRAFT [2 BIT] (AEW A/C)	INDICATES THE FULL MISSION CAPABLE AVAILABILITY OF AIRCRAFT WHOSE MISSION IS AIRBORNE EARLY WARNING.	J13.3C2
041 ELECTRONIC SUPPORT AIRCRAFT [2 BIT] (ELEC SUP)	INDICATES THE FULL MISSION CAPABLE AVAILABILITY OF AIRCRAFT WHOSE MISSION IS ELECTRONICS SUPPORT.	J13.3C2
042 TANKER AIRCRAFT [2 BIT] (TNKR A/C)	INDICATES THE FULL MISSION CAPABLE AVAILABILITY OF AIRCRAFT WHOSE MISSION IS TANKING.	J13.3C2
043 HELICOPTER SUPPORT AIRCRAFT [2 BIT] (HELO SUP)	INDICATES THE FULL MISSION CAPABLE AVAILABILITY OF HELICOPTER WHOSE MISSION IS OTHER THAN ASW.	J13.3C2
044 COMPUTER STATUS [3 BIT]	DESCRIBES THE OPERATING STATUS OF THE COMPUTER SYSTEM.	J13.2C5
045 MISSILE WARNING SYSTEM STATUS [2 BIT] (MWSS)	INDICATES STATUS OF THE MISSILE WARNING SYSTEM.	J13.2C6
046 TELEMETRY POD SUBSYSTEM STATUS [2 BIT] (TPSS)	INDICATES THE STATUS OF THE TELEMETRY POD SUBSYSTEM.	J13.2C6

B-743

APPENDIX B

MIL-STD-6016B

DFI NAME
1665 EQUIPMENT STATUS

DUI NAME	EXPLANATION	APPLICABILITY
047 LASER SPOT TRACKER SUBSYSTEM STATUS [2 BIT] (LSTSS)	INDICATES THE STATUS OF THE LASER SPOT TRACKER SUBSYSTEM.	J13.2C6
048 GLOBAL POSITIONING SUBSYSTEM STATUS [2 BIT] (GPSS)	INDICATES THE STATUS OF THE GLOBAL POSITIONING SUBSYSTEM.	J13.2C6
049 RECCE SYSTEM STATUS [2 BIT] (RSS)	INDICATES THE STATUS OF THE RECONNAISSANCE SUBSYSTEM.	J13.2C6
050 DEFENSIVE JAMMER SYSTEM 1 STATUS [3 BIT]	INDICATES THE STATUS OF DEFENSIVE JAMMER 1.	J13.2C6
051 DEFENSIVE JAMMER SYSTEM 2 STATUS [3 BIT]	INDICATES THE STATUS OF DEFENSIVE JAMMER 2.	J13.2C6
052 TORPEDO TUBE [2 BIT] (TORP TUBE)	INDICATES STATUS OF TORPEDO TUBES AND COMPONENTS.	J13.4C1
053 VERTICAL LAUNCHER [2 BIT] (VERTLNCH)	INDICATES STATUS OF VERTICAL LAUNCHER AND COMPONENTS.	J13.4C1
054 FIRE CONTROL SYSTEM [2 BIT] (FC SYS)	INDICATES STATUS OF FIRE CONTROL SYSTEM AND COMPONENTS.	J13.4C1
055 ACTIVE SONAR [2 BIT] (ACTV SON)	INDICATES STATUS OF ACTIVE SONAR AND COMPONENTS.	J13.4C2
056 HULL MOUNTED PASSIVE SONAR [2 BIT] (HMPSVSON)	INDICATES STATUS OF HULL MOUNTED PASSIVE SONAR AND COMPONENTS.	J13.4C2
057 TOWED ARRAY SONAR [2 BIT] (TA SON)	INDICATES STATUS OF TOWED ARRAY SONAR AND COMPONENTS.	J13.4C2
058 TOMAHAWK WEAPON CONTROL SYSTEM [2 BIT] (TWCS)	DESCRIBES THE OPERATIONAL STATUS OF THE WEAPON CONTROL SYSTEM.	J13.3C2

B-744

APPENDIX B

MIL-STD-6016B

DFI NAME
1665 EQUIPMENT STATUS

DUI NAME	EXPLANATION	APPLICABILITY
059 HARPOON WEAPON CONTROL SYSTEM [2 BIT] (HWCS)	DESCRIBES THE OPERATIONAL STATUS OF THE WEAPON CONTROL SYSTEM.	J13.3C2

DATA ITEM	BIT CODE	EXPLANATION
-----------	----------	-------------

----- FOR DUIS 001-013, 045-047 -----

NO STATEMENT	0
SYSTEM OPERATIONAL	1
SYSTEM NON-OPERATIONAL	2
SYSTEM OFF	3

----- FOR DUIS 014 AND 015 -----

NO STATEMENT	0
SYSTEM OPERATIONAL	1

----- FOR DUIS 016-043, 049, AND 052-059 -----

NO STATEMENT	0	
DEGRADED	1	PARTIALLY OPERATIONAL.
NOT OPERATIONAL	2	
OPERATIONAL	3	

----- FOR DUI 044 -----

NO STATEMENT	0	
SYSTEM OFF	1	THIS DI IS REMOTELY INPUT.
SYSTEM NONOPERATIONAL	2	THIS DI IS REMOTELY INPUT.
ONE CPU OPERATIONAL	3	
HALF MEMORY AVAILABLE	4	
SYSTEM OPERATIONAL	5	
UNDEFINED	6 THROUGH 7	

----- FOR DUI 048 -----

NO STATEMENT	0
UP	1
DOWN	2
DEGRADED	3

B-745

MIL-STD-6016B
APPENDIX B

DFI NAME
1665 EQUIPMENT STATUS

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
----- FOR DUIS 050 AND 051 -----		
NO STATEMENT	0	
TRANSMIT	1	
RECEIVE	2	
STANDBY	3	
DEGRADE	4	
OFF	5	
UNDEFINED	6 THROUGH 7	

DFI	NAME	DEFINITION
1666	RADIO STATUS	DESCRIBES THE OPERATING STATUS OF A RADIO.
DATA STANDARD USAGE: Link 16		STATUS:
DUI NAME	EXPLANATION	APPLICABILITY
002 RADIO STATUS, 1 [3 BIT]	DESCRIBES THE OPERATING STATUS OF A RADIO.	J13.2C1
003 RADIO STATUS, 2 [3 BIT]	DESCRIBES THE OPERATING STATUS OF A RADIO.	J13.2C1
004 RADIO STATUS, 3 [3 BIT]	DESCRIBES THE OPERATING STATUS OF A RADIO.	J13.2C1
DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 002-004 -----		
NO STATEMENT	0	
RADIO ON	1	RADIO IS OPERATIONAL.
RADIO OFF	2	RADIO IS OPERATIONAL.
RADIO NON-OPERATIONAL	3	
RECEIVER NON-OPERATIONAL	4	
TRANSMITTER	5	
NON-OPERATIONAL		
UNDEFINED	6 THROUGH 7	

DFI	NAME	DEFINITION
1668	REPROMULGATION COUNTER	INDICATES THE NUMBER OF REPROMULGATIONS REQUIRED.
DATA STANDARD USAGE: Link 16		STATUS:
DUI NAME	EXPLANATION	APPLICABILITY
001 REPROMULGATION COUNTER [4 BIT]		J0.5I J1.5I
002 REPROMULGATION COUNTER, ORIGINAL VALUE [4 BIT]		J0.5I
DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 ----- REPROMULGATION REQUIRED	0 THROUGH 15	INDICATES THE NUMBER OF REPROMULGATIONS REQUIRED.
----- FOR DUI 002 ----- NUMERIC	0 THROUGH 15	INDICATES THE ORIGINAL VALUE SET IN THE REPROMULGATION COUNTER.

DFI NAME DEFINITION
1669 MISSION CORRELATOR CHANGE SPECIFIES A CHANGE IN MISSION CORRELATOR.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 MISSION CORRELATOR CHANGE [2 BIT] (COR CHG)	SPECIFIES A CHANGE IN MISSION CORRELATOR.	J8.1I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
ADD MISSION CORRELATOR	1	
DELETE MISSION CORRELATOR	2	
CHANGE MISSION CORRELATOR TO MISSION CORRELATOR, NEW	3	

DFI NAME DEFINITION
1670 CONTROL INDICATOR INDICATES THE CONTROL OF A REFERENCE TRACK.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 CONTROLLING UNIT STATUS [1 BIT] (CNT UNT)	INDICATES THE CONTROL OF A REFERENCE TRACK.	J10.5I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
TERMINATING CONTROL OF REFERENCE TRACK	0	
MAINTAINING CONTROL OF REFERENCE TRACK	1	

DFI	NAME	DEFINITION
1675	DATA UPDATE REQUEST INDICATOR	USED TO SPECIFY THAT A PARTICULAR TYPE OF DATA UPDATE IS REQUIRED BY THE SOURCE TRACK NUMBER.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 REFERENCE POINT DATA REQUEST INDICATOR [1 BIT] (RDR)	USED TO REQUEST THE ADDRESSEE TN TRANSMIT ALL CURRENT J3.0 LINES AND AREAS DEFINED BY MORE THAN ONE J3.0 MESSAGE FOR WHICH THE UNIT HAS R2.	J7.1I
003 ELECTRONIC ATTACK DATA REQUEST INDICATOR [1 BIT] (ECD)	USED TO REQUEST THE ADDRESSEE TN TRANSMIT ALL CURRENT EA FIX AND/OR BEARING DATA THAT THE UNIT ORIGINATED.	J7.1I
004 ES DATA REQUEST INDICATOR [1 BIT] (ESD)	USED TO REQUEST THE ADDRESSEE TN TRANSMIT ALL CURRENT ES FIX AND/OR BEARING DATA.	J7.1I
005 WEAPON STATUS DATA REQUEST INDICATOR [1 BIT] (WSD)	USED TO REQUEST THE ADDRESSEE TN TRANSMIT ALL CURRENT WEAPON STATUS DATA THAT THE UNIT ORIGINATED.	J7.1I
006 WEATHER DATA REQUEST INDICATOR [1 BIT] (WXD)	USED TO REQUEST THE ADDRESSEE TN TRANSMIT ALL CURRENT WEATHER DATA THAT THE UNIT ORIGINATED.	J7.1I
007 AMPLIFICATION DATA REQUEST INDICATOR [1 BIT] (AMD)	USED TO REQUEST THE ADDRESSEE TN TRANSMIT ALL CURRENT AMPLIFICATION DATA THAT THE UNIT ORIGINATED.	J7.1I
008 FILTER DATA REQUEST INDICATOR [1 BIT] (FIL)	USED TO REQUEST THE ADDRESSEE TN TRANSMIT ALL CURRENT FILTER DATA THAT THE UNIT ORIGINATED.	J7.1I
009 ELECTRONIC WARFARE FIXES DATA REQUEST INDICATOR [1 BIT] (EWF)	USED TO REQUEST THE ADDRESSEE TN TRANSMIT ALL CURRENT EW FIXES.	J7.1I

B-751

MIL-STD-6016B
APPENDIX B

DFI NAME
1675 DATA UPDATE REQUEST INDICATOR

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
REFERENCE POINT DATA UP- DATE REQUESTED	1	THE UNIT SPECIFIED IN THE ADDRESSEE TN IS REQUESTED TO TRANSMIT ALL CURRENT J3.0 LINES AND AREAS DEFINED BY MORE THAN ONE J3.0 MESSAGE FOR WHICH THE UNIT HAS R2.
----- FOR DUI 003 -----		
NO STATEMENT	0	
EA DATA UPDATE REQUESTED	1	THE UNIT SPECIFIED IN THE ADDRESSEE TN IS REQUESTED TO TRANSMIT ALL CURRENT EA FIX AND/OR BEARING DATA THAT THE UNIT ORIGINATED AND MAY INCLUDE DATA RECEIVED FROM REMOTE SOURCES FOR FIELDS FOR WHICH LOCALLY DERIVED DATA IS NOT AVAILABLE. WHEN THERE IS NO LOCALLY ORIGINATED DATA AVAILABLE, A RESPONSE MESSAGE MAY BE TRANSMITTED WITH REMOTE SOURCE DATA ONLY IF INITIALIZED BY OPERATOR ACTION.
----- FOR DUI 004 -----		
NO STATEMENT	0	
ES DATA UPDATE REQUESTED	1	THE UNIT SPECIFIED IN THE ADDRESSEE TN IS REQUESTED TO TRANSMIT ALL CURRENT ES FIX AND/OR BEARING DATA THAT THE UNIT ORIGINATED AND MAY INCLUDE DATA RECEIVED FROM REMOTE SOURCES FOR FIELDS FOR WHICH LOCALLY DERIVED DATA IS NOT AVAILABLE. WHEN THERE IS NO LOCALLY ORIGINATED DATA AVAILABLE, A RESPONSE MESSAGE MAY BE

DFI NAME
1675 DATA UPDATE REQUEST INDICATOR

DATA ITEM (CONTINUED) (CONTINUED)	BIT CODE	EXPLANATION TRANSMITTED WITH REMOTE SOURCE DATA ONLY IF INITIALIZED BY OPERATOR ACTION.
----- FOR DUI 005 -----		
NO STATEMENT	0	
WEAPON STATUS DATA UPDATE REQUESTED	1	THE UNIT SPECIFIED IN THE ADDRESSEE TN IS REQUESTED TO TRANSMIT ALL CURRENT WEAPON STATUS DATA.
----- FOR DUI 006 -----		
NO STATEMENT	0	
WEATHER DATA UPDATE REQUESTED	1	THE UNIT SPECIFIED IN THE ADDRESSEE TN IS REQUESTED TO TRANSMIT ALL CURRENT WEATHER DATA THAT THE UNIT ORIGINATED.
----- FOR DUI 007 -----		
NO STATEMENT	0	
AMPLIFICATION DATA UPDATE REQUESTED	1	THE UNIT SPECIFIED IN THE ADDRESSEE TN IS REQUESTED TO TRANSMIT ALL CURRENT AMPLIFICATION DATA.
----- FOR DUI 008 -----		
NO STATEMENT	0	
FILTER DATA UPDATE REQUESTED	1	THE UNIT SPECIFIED IN THE ADDRESSEE TN IS REQUESTED TO TRANSMIT ALL CURRENT FILTER DATA.
----- FOR DUI 009 -----		
NO STATEMENT	0	
EW FIXES REQUESTED	1	THE UNIT SPECIFIED IN THE ADDRESSEE TN IS REQUESTED TO TRANSMIT ALL CURRENT EW FIXES THAT THE UNIT ORIGINATED AND MAY INCLUDE DATA RECEIVED FROM REMOTE SOURCES FOR

DFI NAME
1675 DATA UPDATE REQUEST INDICATOR

DATA ITEM (CONTINUED)
(CONTINUED)

BIT CODE

EXPLANATION
FIELDS FOR WHICH LOCALLY DERIVED
DATA IS NOT AVAILABLE. WHEN THERE
IS NO LOCALLY ORIGINATED DATA
AVAILABLE, A RESPONSE MESSAGE MAY
BE TRANSMITTED WITH REMOTE SOURCE
DATA ONLY IF INITIALIZED BY
OPERATOR ACTION.

DFI NAME
1676 LASER ILLUMINATOR CODE

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME

EXPLANATION

APPLICABILITY

001 LASER ILLUMINATOR CODE
[16 BIT]

A FOUR DIGIT CODE USED BY LASER
DESIGNATORS AND LASER WEAPONS.

J12.0C6

DATA ITEM

BIT CODE

EXPLANATION

----- FOR DUI 001 -----

THE SIXTEEN BITS ARE DIVIDED INTO
FOUR GROUPS OF FOUR BITS. EACH
GROUP IS INTERPRETED
INDEPENDENTLY.

0 THROUGH 9
ILLEGAL

0 THROUGH 9
10 THROUGH 15

DFI NAME DEFINITION
1677 SECURE DATA UNIT SERIAL NUMBER DATA INSERTED BY SOURCE SECURE DATA UNIT OF THE ORIGINATOR AND
CAN BE INTERPRETED ONLY BY THE SECURE DATA UNIT.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
001 SECURE DATA UNIT SERIAL NUMBER [16 BIT]	DATA INSERTED BY SOURCE SECURE DATA UNIT OF THE ORIGINATOR AND CAN BE INTERPRETED ONLY BY THE SECURE DATA UNIT.	HEADER RTT-REP	RTT-A	RTT-B
003 SECURE DATA UNIT IDENTIFICATION NUMBER [16 BIT]	DATA PROVIDED BY THE SECURE DATA UNIT OF THE ORIGINATOR AND INSERTED IN THE MESSAGE BY THE ORIGINATOR'S TERMINAL.	J31.0C1		

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001 AND 003 -----		
SEE DUI EXPLANATION	0 THROUGH 65535	

DFI NAME DEFINITION
1678 CONTROL POSITIONS INDICATES THE NUMBER OF OPERATIONAL CONTROL POSITIONS.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 CONTROL POSITIONS [5 BIT]	INDICATES THE NUMBER OF OPERATOR/ CONTROL POSITIONS AVAILABLE.	J13.5C1
002 CONTROL POSITIONS, 1 [4 BIT]	INDICATES THE NUMBER OF CONTROL POSITIONS AVAILABLE.	J13.2C5
003 CONSOLE STATUS [5 BIT]	INDICATES THE NUMBER OF OPERATIONAL CONSOLES.	J13.2C5

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
0 THROUGH 29 POSITIONS	0 THROUGH 29	NUMBER OF POSITIONS IN INCREMENTS OF ONE.
GREATER THAN 29 POSITIONS	30	
NO STATEMENT	31	
----- FOR DUI 002 -----		
0 THROUGH 13 POSITIONS	0 THROUGH 13	
GREATER THAN 13 POSITIONS	14	
NO STATEMENT	15	
----- FOR DUI 003 -----		
0 THROUGH 29 CONSOLES	0 THROUGH 29	
GREATER THAN 29 CONSOLES	30	
NO STATEMENT	31	

APPENDIX B

DFI NAME DEFINITION
 1681 TIME FUNCTION USED IN CONJUNCTION WITH MINUTE AND HOUR DATA ELEMENTS TO
 DESCRIBE THEIR MEANING.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
001 TIME FUNCTION [3 BIT]	USED IN CONJUNCTION WITH THE MINUTE AND HOUR FIELDS TO DESCRIBE THE TIME FUNCTION ASSOCIATED WITH THE REPORTED TIME.	J3.0I J12.3I	J3.1E0 J13.5I	J3.5C1 J13.5C1
002 TIME REPORT FUNCTION [3 BIT]	USED IN CONJUNCTION WITH THE MINUTE AND HOUR FIELDS TO DESCRIBE THEIR USE.	J13.2I	J13.3I	
003 TIME FUNCTION, ASW [2 BIT] (TIME FCT)	USED IN CONJUNCTION WITH THE MINUTE AND HOUR FIELDS TO DESCRIBE THE TIME FUNCTION ASSOCIATED WITH A SUBSURFACE TRACK REPORT.	J3.4C1		
004 TIME INDICATOR [3 BIT]	USED IN CONJUNCTION WITH THE MINUTE, SECOND, AND HUNDREDTHS FIELDS TO DESCRIBE THEIR USE FOR TARGETING.	J12.6C2	J12.7E1	
005 TIME FUNCTION, 1 [3 BIT]	USED IN CONJUNCTION WITH THE SECOND, TENTHS AND MINUTE FIELDS TO DESCRIBE THEIR USE.	J10.2C2		

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
ACTIVATION TIME	1	
DEACTIVATION TIME	2	
ARRIVAL TIME	3	
DEPARTURE TIME	4	
TIME POINT ESTABLISHED	5	THE TIME THE REPORTED POSITION FOR THE POINT WAS ESTABLISHED. THIS MAY BE A TIME PRIOR TO DATA ENTRY.
NON-OP TIME	6	THE TIME THE SITE IS EXPECTED TO BECOME LESS THAN FULLY OPERATIONAL.

DFI NAME
1681 TIME FUNCTION

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
OP TIME	7	THE TIME THE SITE IS EXPECTED TO RETURN FULLY OPERATIONAL.
----- FOR DUI 002 -----		
NO STATEMENT	0	
TIME OF REPORT	1	THE TIME OF DAY IN HOURS AND MINUTES THAT THE REPORT WAS RELEASED FOR TRANSMISSION.
DISUSED	2	
ARRIVE ON STATION	3	DELTA TIME IN HOURS AND MINUTES FROM THE TIME THE REPORT WAS RELEASED FOR TRANSMISSION BEFORE A UNIT ARRIVES ON STATION.
TIME REMAINING ON STATION	4	DELTA TIME IN HOURS AND MINUTES FROM THE TIME THE REPORT WAS RELEASED FOR TRANSMISSION INDICATING THE ESTIMATED TIME THAT AN AIRCRAFT CAN REMAIN ON TASK, TAKING INTO ACCOUNT SUCH OPERATIONAL FACTORS AS FUEL STATE, WEATHER, DISTANCE FROM BASE, ETC. ILLEGAL FOR USE IN THE J13.3.
DEPART STATION	5	THE TIME OF DAY IN HOURS AND MINUTES THAT A UNIT IS SCHEDULED TO LEAVE ITS STATION IN ACCORDANCE WITH ITS MISSION PLAN, OR THE TIME OF DAY THAT THE UNIT LEFT ITS STATION.
TIME ON TARGET	6	DELTA TIME IN HOURS AND MINUTES FROM TIME OF CURRENT REPORT.
UNDEFINED	7	
----- FOR DUI 003 -----		
NO STATEMENT	0	
TIME CONTACT FIRST ACQUIRED/TIME DATUM ESTABLISHED	1	
TIME OF CURRENT POSITIONAL DATA	2	
TIME CONTACT LOST	3	

B-759

APPENDIX B

MIL-STD-6016B

APPENDIX B

DFI NAME
1681 TIME FUNCTION

DATA ITEM (CONTINUED) ----- FOR DUI 004 -----	BIT CODE	EXPLANATION
NO STATEMENT	0	
TIME OF OBSERVATION	1	THE TIME (MINUTE, SECOND, AND HUNDREDTHS FIELDS COLLECTIVELY) REPRESENTS THE TIME AT WHICH THE TARGET WAS ACTUALLY OBSERVED BY THE REPORTING UNIT. THE TIME IS REFERENCED TO NETWORK TIME.
TIME OF EXTRAPOLATION	2	THE TIME (MINUTE, SECOND, AND HUNDREDTHS FIELDS COLLECTIVELY) REPRESENTS THE TIME TO WHICH THE REPORTING JU LAST EXTRAPOLATED THE TARGET. THE TIME IS REFERENCED TO NETWORK TIME, AND APPLIES TO ALL PARAMETERS EXCEPT LATITUDE AND LONGITUDE WHICH ARE EXTRAPOLATED TO TIME OF TRANSMISSION.
TRACK AGE	3	THE TIME (MINUTE, SECOND, AND HUNDREDTHS FIELDS COLLECTIVELY) REPRESENTS THE LENGTH OF TIME THAT HAS PASSED SINCE TARGET WAS LAST EXTRAPOLATED. THIS FIELD VALUE IS ONLY USED WHEN NONE OF THE TARGET DATA IS EXTRAPOLATED BY THE SENDER UP TO THE TIME OF TRANSMISSION OF THE DATA. THIS TIME IS REFERENCED TO NETWORK TIME.
UNDEFINED GREATER THAN 1 HOUR	4 THROUGH 6 7	MORE THAN AN HOUR HAS PASSED SINCE THE TARGET WAS LAST EXTRAPOLATED. DO NOT INTERPRET THE MINUTE, SECOND, OR HUNDREDTHS FIELDS.
----- FOR DUI 005 -----		
NO STATEMENT	0	
TIME OF PREDICTED INTERCEPT	1	TIME THE PREDICTED INTERCEPT WILL OCCUR REFERENCED TO NETWORK TIME (GMT).
TIME OF ACTUAL INTERCEPT	2	ACTUAL TIME THE INTERCEPT OCCURED

DFI NAME
1681 TIME FUNCTION

DATA ITEM (CONTINUED)
(CONTINUED)

UNDEFINED

BIT CODE

3 THROUGH 7

EXPLANATION
REFERENCED TO NETWORK TIME
(GMT).

DFI NAME DEFINITION
1682 ALTITUDE AMPLIFICATION THE USE OF AN ALTITUDE APPEARING IN A SPECIFIED DATA FIELD.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 ALTITUDE AMPLIFICATION [3 BIT] (ALT AMP)	SPECIFIES THE FUNCTION OF AN ALTITUDE.	J12.3E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
ARRIVE AT SPECIFIED ALTITUDE	1	
DEPART AT SPECIFIED ALTITUDE	2	
UNDEFINED	3 THROUGH 5	
HOT BELOW THIS ALTITUDE	6	
HOT ABOVE THIS ALTITUDE	7	

DFI	NAME	DEFINITION
1683	POINT SEQUENCE NUMBER	THE SEQUENCE NUMBER ASSIGNED TO A POINT IN ORDER TO DEFINE A LINE OR AREA.

DATA STANDARD USAGE: Link 16	STATUS:
------------------------------	---------

DUI NAME	EXPLANATION	APPLICABILITY
001 SEQUENCE NUMBER [4 BIT]	THE SEQUENCE NUMBER OF THE POINT BEING TRANSMITTED IN THIS MESSAGE.	J12.3I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
WAYPOINTS 1 THROUGH 15	1 THROUGH 15	

DFI	NAME	DEFINITION
1705	WAYPOINT ACTION/DESCRIPTOR	DESCRIBES ACTION TO BE TAKEN AND THE RESPONSE TO A ACTION REQUESTED.

DATA STANDARD USAGE: Link 16	STATUS:
------------------------------	---------

DUI NAME	EXPLANATION	APPLICABILITY
----------	-------------	---------------

001 WAYPOINT ACTION/DESCRIPTOR [4 BIT]	DESCRIBES ACTION TO BE TAKEN AND THE RESPONSE TO AN ACTION REQUESTED.	J12.3I
---	--	--------

DATA ITEM	BIT CODE	EXPLANATION
-----------	----------	-------------

----- FOR DUI 001 -----

C2 UNIT TO AIRCRAFT
OR MISSILE

ORIGINAL POINT	0	ORIGINAL POINT USED FOR THE INITIAL TRANSMISSION OF A SET OF POINTS TO AN ADDRESSED AIRCRAFT OR MISSILE. (EXCEPT THE FINAL POINT IN THE SERIES, WHICH IS SET TO 3 FOR AIRCRAFT OR 6 FOR MISSILE.)
----------------	---	---

C2 UNIT TO AIRCRAFT

REPLACEMENT POINT	1	USED ONLY WHEN A PREVIOUSLY TRANSMITTED POINT IS TO BE UPDATED. THE SEQUENCE NUMBER IS USED TO DESIGNATE WHICH POINT POSITION IS TO BE UPDATED.
CANCEL POINT	2	USED BY C2 UNITS TO CANCEL A PREVIOUSLY TRANSMITTED POINT DESIGNATED BY THE VALUE IN THE SEQUENCE NUMBER FIELD.
LAST POINT IN SERIES	3	DESIGNATES TO THE AIRCRAFT THAT THIS IS THE LAST POINT IN THE SERIES. THE AIRCRAFT WILL THEN RESPOND WITH A VALUE 8 OR 9.
ORBIT THIS POINT	4	THE AIRCRAFT IS DIRECTED TO ORBIT THIS POINT UNTIL FURTHER DIRECTED

DFI NAME
1705 WAYPOINT ACTION/DESCRIPTOR

DATA ITEM (CONTINUED)

C2 UNIT TO AIRCRAFT

BIT CODE
(CONTINUED)

EXPLANATION

(CONTINUED)
RESTRICTED AREA BOUNDARY

5

OR UNTIL THE TIME SPECIFIED.
USED TO DEFINE RESTRICTED OR HOT
AREAS. IF THE AREAS ARE TO BE
AVOIDED FOR SPECIFIC TIMES ONLY, A
TIME AND TIME FUNCTION SHALL BE
TRANSMITTED.

C2 UNIT TO MISSILE

TARGET

6

NOTIFIES THE MISSILE (I.E., CRUISE
MISSILE) OF THE TARGET POSITION OR
TERMINAL ACTION OF THE MISSILE,
DEPENDING ON THE MISSILE DESIGN.

UNDEFINED

7

AIRCRAFT TO C2 UNIT

ALL POINTS RECEIVED

8

AN AUTOMATIC RESPONSE BY THE
AIRCRAFT IF ALL THE DATA HAS BEEN
RECEIVED.

LOST POINT

9

USED TO SPECIFY WHICH POINTS HAVE
BEEN MISSED, OR WHICH HAVE
ILLOGICAL DATA. THE C2 UNIT WILL
RETRANSMIT THE SPECIFIED POINT.

PILOT CANNOT COMPLY

10

USED BY THE AIRCRAFT'S PILOT TO
INDICATE THAT HE CANNOT PERFORM
THE TRANSMITTED FLIGHT PATH.

PILOT WILL COMPLY

11

USED BY THE AIRCRAFT PILOT TO
INDICATE HE WILL PERFORM THE
TRANSMITTED FLIGHT PATH.

UNDEFINED

12 THROUGH 15

APPENDIX B

MIL-STD-6016B

DFI NAME DEFINITION
1716 SLAVED INDICATOR AN INDICATION OF WHETHER THE POINT DESCRIBED IS SLAVED TO A UNIT.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 SLAVED INDICATOR [1 BIT] (SLV IND)	USED TO INDICATE WHETHER OR NOT THE POINT DESCRIBED IN THE MESSAGE IS SLAVED TO THE UNIT SPECIFIED IN THE RELATED TN FIELD.	J3.0I J7.6I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NOT SLAVED	0	THE POINT DESCRIBED IN THIS MESSAGE IS NOT SLAVED TO ANY UNIT.
SLAVED	1	THE POINT DESCRIBED IN THIS MESSAGE IS SLAVED TO THE UNIT SPECIFIED IN THE RELATED TN FIELD.

DFI	NAME	DEFINITION
1717	VOICE CALL SIGN INTERPRETATION INDICATOR	INDICATES WHETHER OR NOT THE VOICE CALL SIGN FIELD SHOULD BE INTERPRETED.
DATA STANDARD USAGE: Link 16		STATUS:
DUI NAME	EXPLANATION	APPLICABILITY
001 VOICE CALL SIGN INDICATOR [1 BIT] (VCS IND)	USED TO INDICATE WHETHER OR NOT THE VOICE CALL SIGN FIELD SHOULD BE INTERPRETED.	J2.2C2 J2.3C2 J2.4C2 J2.5C1 J2.6C1
DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
DO NOT INTERPRET VOICE CALL SIGN	0	
INTERPRET VOICE CALL SIGN	1	

DFI	NAME	DEFINITION
1718	LINK 4A ADDRESS INDICATOR	INDICATES WHETHER OR NOT THE LINK 4 ADDRESS SHOULD BE INTERPRETED.

DATA STANDARD USAGE: Link 16	STATUS:
------------------------------	---------

DUI NAME	EXPLANATION	APPLICABILITY
001 LINK 4A ADDRESS INDICATOR [1 BIT] (L4A IND)	USED TO INDICATE WHETHER OR NOT THE LINK 4A ADDRESS FIELD SHOULD BE INTERPRETED.	J2.2C2 J2.3C2 J2.4C2

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
DO NOT INTERPRET LINK 4A ADDRESS	0	
INTERPRET LINK 4A ADDRESS	1	

DFI NAME DEFINITION
1719 FORWARDED UNIT TYPE IDENTIFIES THE TYPE OF LINK 11/11B UNIT THAT THE JTIDS/MIDS
IDS UNIT IS FORWARDING THE POSITION OF.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 SITE [3 BIT]	USED TO INDICATE THE TYPE OF LINK 11/11B UNIT THAT THE JTIDS/MIDS UNIT IS FORWARDING THE POSITION OF.	J2.0I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
FPU/FRU	1	
PU	2	
RU	3	
UNDEFINED	4 THROUGH 7	

APPENDIX B

DFI	NAME	DEFINITION
1720	LINE/AREA CONTINUATION INDICATOR	USED TO DESCRIBE THE APPLICATION OF THE POINTS DESCRIBED IN THE MESSAGE AND HOW THEY RELATE TO POINTS DESCRIBED IN PREVIOUS MESSAGES.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 LINE/AREA CONTINUATION INDICATOR [1 BIT] (LAC IND)	THIS FIELD IS USED TO DESCRIBE THE RELATIONSHIP OF THE POINTS' LOCATION DESCRIBED IN THE EXTENSION WORD OF THIS MESSAGE WITH POINTS THAT HAVE BEEN DESCRIBED IN PREVIOUS MESSAGES. IT ALSO INDICATES THAT THE POINTS DESCRIBED IN THIS MESSAGE SHOULD BE JOINED TO FORM A SEGMENTED LINE OR A MULTI-SIDED AREA DEPENDING ON THE VALUE OF THE POINT/LINE/AREA DESCRIPTOR, 1.	J3.0I
002 LINE/AREA CONTINUATION INDICATOR, 1 [1 BIT] (LAC1)	THIS FIELD IS USED TO DESCRIBE THE RELATIONSHIP OF THE POINTS' LOCATION DESCRIBED IN THE EXTENSION WORD OF THIS MESSAGE WITH POINTS THAT HAVE BEEN DESCRIBED IN PREVIOUS MESSAGES. IT ALSO INDICATES THAT THE POINTS DESCRIBED IN THIS MESSAGE SHOULD BE JOINED TO FORM A SEGMENTED LINE, OR A MULTI-SIDED AREA WHEN THE FIRST AND LAST POINT LOCATIONS COINCIDE.	J7.6I

DATA ITEM

BIT CODE

EXPLANATION

----- FOR DUI 001 -----

NO STATEMENT	0
LINE/AREA CONTINUATION	1

THE LATITUDE AND LONGITUDE FIELDS IN THE EXTENSION WORD OF THIS MESSAGE DESCRIBE A POINT THAT IS COINCIDENT WITH THE LAST POINT TRANSMITTED IN A PREVIOUS MESSAGE. THE POINTS DESCRIBED IN THIS MESSAGE

DFI	NAME			
1720	LINE/AREA CONTINUATION INDICATOR			
	DATA ITEM (CONTINUED) (CONTINUED)	BIT CODE		EXPLANATION SHOULD BE JOINED TO FORM A SEG- MENTED LINE OR A MULTI-SIDED AREA DEPENDING ON THE VALUE OF THE POINT/LINE/AREA DESCRIPTOR, 1.
	----- FOR DUI 002 -----			
	NO STATEMENT	0		
	LINE/AREA CONTINUATION	1		THE LATITUDE AND LONGITUDE FIELDS IN THE EXTENSION WORD OF THIS MESSAGE DESCRIBE A POINT THAT IS COINCI- DENT WITH THE LAST POINT TRANS- MITTED IN A PREVIOUS MESSAGE. THE POINTS DESCRIBED IN THIS MESSAGE SHOULD BE JOINED TO FORM A SEG- MENTED LINE OR, WHEN THE FIRST AND LAST POINT LOCATIONS COINCIDE, A MULTI-SIDED AREA.

DFI	NAME	DEFINITION
1721	PRECISION AIRCRAFT DIRECTION DISCRETE	PROVIDES DISCRETE INFORMATION FOR THE PRECISION AIRCRAFT DIRECTION MESSAGE.

DATA STANDARD USAGE: Link 16	STATUS:
------------------------------	---------

DUI NAME	EXPLANATION	APPLICABILITY
001 PRECISION AIRCRAFT DIRECTION DISCRETE [4 BIT] (PAD DIS)	PROVIDES DISCRETE INFORMATION FOR THE PRECISION AIRCRAFT DIRECTION MESSAGE.	J12.2I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
PRECISION RADAR READY	1	THE PRECISION RADAR SYSTEM IS LOCKED ON AND TRACKING.
UNDER PRECISION CONTROL	2	VERTICAL AND LATERAL COMMAND DATA ARE VALID FOR USE BY AIRCRAFT AUTOPILOT.
10 SECONDS TO GO	3	THE AIRCRAFT UNDER CONTROL IS 10 SECONDS FROM TOUCHDOWN/RELEASE.
NOT UNDER COMMAND	4	VERTICAL AND LATERAL COMMAND DATA ARE NOT VALID FOR USE BY AIRCRAFT AUTOPILOT.
REVERT TO VOICE	5	AIRCRAFT UNDER CONTROL SHOULD ESTABLISH VOICE COMMUNICATION WITH CONTROLLING UNIT.
WAVE OFF	6	AIRCRAFT UNDER CONTROL SHOULD DISCONTINUE APPROACH.
BEACON ON	7	AIRCRAFT IS COMMANDED TO TURN ON BEACON.
LANDING CHECKLIST	8	AIRCRAFT UNDER CONTROL SHOULD PREPARE FOR LANDING.
UNDEFINED	9 THROUGH 15	

DFI	NAME	DEFINITION
1725	CONNECTIVITY QUALITY	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 CONNECTIVITY QUALITY, 1 [2 BIT] (CQ, 1)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.1I
002 CONNECTIVITY QUALITY, 2 [2 BIT] (CQ, 2)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.1I
003 CONNECTIVITY QUALITY, 3 [2 BIT] (CQ, 3)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.1I
004 CONNECTIVITY QUALITY, 4 [2 BIT] (CQ, 4)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.1E0
005 CONNECTIVITY QUALITY, 5 [2 BIT] (CQ, 5)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.1E0
006 CONNECTIVITY QUALITY, 6 [2 BIT] (CQ, 6)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.1E0
007 CONNECTIVITY QUALITY, 7 [2 BIT] (CQ, 7)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.1E0
008 CONNECTIVITY QUALITY, 8 [2 BIT] (CQ, 8)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.1E0 J1.1C1
009 CONNECTIVITY QUALITY, 9 [2 BIT] (CQ, 9)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.1E0 J1.1C1
010 CONNECTIVITY QUALITY, 10 [2 BIT] (CQ, 10)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR	J1.1E0 J1.1C1

DFI NAME
1725 CONNECTIVITY QUALITY

DUI NAME	EXPLANATION	APPLICABILITY	
010 (CONTINUED)	ERASURES IN A SINGLE TIME SLOT.		
011 CONNECTIVITY QUALITY, 11 [2 BIT] (CQ, 11)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.1E0	
012 CONNECTIVITY QUALITY, INTERCOMMUNITY COMMUNICANT [2 BIT] (CQ, 1C)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4I	
013 CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 1 [2 BIT] (CQ, 1)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.1C2	J1.4E0
014 CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 2 [2 BIT] (CQ, 2)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.1C2	J1.4E0
015 CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 3 [2 BIT] (CQ, 3)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.1C2	J1.4E0
016 CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 4 [2 BIT] (CQ, 4)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.1C2	J1.4E0
017 CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 5 [2 BIT] (CQ, 5)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.1C2	J1.4E0
018 CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 6 [2 BIT] (CQ, 6)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.1C2	J1.4E0
019 CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 7 [2 BIT] (CQ, 7)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.1C2	J1.4E0
020 CONNECTIVITY QUALITY, INTRA- COMMUNITY COMMUNICANT 8 [2 BIT] (CQ, 8)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.1C2	J1.4E0

DFI NAME
1725 CONNECTIVITY QUALITY

DUI NAME	EXPLANATION	APPLICABILITY	
021 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 9 [2 BIT] (CQ, 9)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.1C2	J1.4E0
022 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 10 [2 BIT] (CQ, 10)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.1C2	J1.4E0
023 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 11 [2 BIT] (CQ, 11)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.1C2	J1.4E0
024 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 12 [2 BIT] (CQ, 12)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.1C2	J1.4E0
025 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 13 [2 BIT] (CQ, 13)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.1C2	J1.4E0
026 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 14 [2 BIT] (CQ, 14)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.1C2	J1.4E0
027 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 15 [2 BIT] (CQ, 15)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.1C2	J1.4E0
028 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 16 [2 BIT] (CQ, 16)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.1C2	J1.4E0
029 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 17 [2 BIT] (CQ, 17)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.1C2	J1.4E0
030 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 18 [2 BIT] (CQ, 18)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.1C2	J1.4E0

B-775

APPENDIX B

MIL-STD-6016B

DFI NAME
1725 CONNECTIVITY QUALITY

DUI NAME	EXPLANATION	APPLICABILITY	
031 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 19 [2 BIT] (CQ, 19)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.1C2	J1.4E0
032 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 20 [2 BIT] (CQ, 20)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.1C2	J1.4E0
033 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 21 [2 BIT] (CQ, 21)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.1C2	J1.4E0
034 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 22 [2 BIT] (CQ, 22)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.1C2	J1.4E0
035 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 23 [2 BIT] (CQ, 23)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.1C2	J1.4E0
036 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 24 [2 BIT] (CQ, 24)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.1C2	J1.4E0
037 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 25 [2 BIT] (CQ, 25)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.1C2	J1.4E0
038 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 26 [2 BIT] (CQ, 26)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.1C2	J1.4E0
039 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 27 [2 BIT] (CQ, 27)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.1C2	J1.4E0
040 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 28 [2 BIT] (CQ, 28)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.1C2	J1.4E0

B-776

APPENDIX B

MIL-STD-6016B

DFI NAME
1725 CONNECTIVITY QUALITY

DUI NAME	EXPLANATION	APPLICABILITY
041 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 29 [2 BIT] (CQ, 29)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.1C2 J1.4E0
042 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 30 [2 BIT] (CQ, 30)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.1C2 J1.4E0
043 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 31 [2 BIT] (CQ, 31)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.1C2 J1.4E0
044 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 32 [2 BIT] (CQ, 32)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
045 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 33 [2 BIT] (CQ, 33)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
046 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 34 [2 BIT] (CQ, 34)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
047 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 35 [2 BIT] (CQ, 35)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
048 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 36 [2 BIT] (CQ, 36)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
049 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 37 [2 BIT] (CQ, 37)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
050 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 38 [2 BIT] (CQ, 38)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0

B-777

APPENDIX B

MIL-STD-6016B

DFI NAME
1725 CONNECTIVITY QUALITY

DUI NAME	EXPLANATION	APPLICABILITY
051 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 39 [2 BIT] (CQ, 39)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
052 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 40 [2 BIT] (CQ, 40)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
053 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 41 [2 BIT] (CQ, 41)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
054 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 42 [2 BIT] (CQ, 42)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
055 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 43 [2 BIT] (CQ, 43)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
056 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 44 [2 BIT] (CQ, 44)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
057 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 45 [2 BIT] (CQ, 45)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
058 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 46 [2 BIT] (CQ, 46)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
059 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 47 [2 BIT] (CQ, 47)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
060 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 48 [2 BIT] (CQ, 48)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0

B-778

APPENDIX B

MIL-STD-6016B

DFI NAME
1725 CONNECTIVITY QUALITY

DUI NAME	EXPLANATION	APPLICABILITY
061 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 49 [2 BIT] (CQ, 49)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
062 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 50 [2 BIT] (CQ, 50)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
063 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 51 [2 BIT] (CQ, 51)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
064 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 52 [2 BIT] (CQ, 52)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
065 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 53 [2 BIT] (CQ, 53)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
066 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 54 [2 BIT] (CQ, 54)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
067 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 55 [2 BIT] (CQ, 55)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
068 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 56 [2 BIT] (CQ, 56)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
069 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 57 [2 BIT] (CQ, 57)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
070 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 58 [2 BIT] (CQ, 58)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0

B-779

APPENDIX B

MIL-STD-6016B

DFI NAME
1725 CONNECTIVITY QUALITY

DUI NAME	EXPLANATION	APPLICABILITY
071 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 59 [2 BIT] (CQ, 59)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
072 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 60 [2 BIT] (CQ, 60)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
073 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 61 [2 BIT] (CQ, 61)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
074 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 62 [2 BIT] (CQ, 62)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
075 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 63 [2 BIT] (CQ, 63)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
076 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 64 [2 BIT] (CQ, 64)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
077 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 65 [2 BIT] (CQ, 65)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
078 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 66 [2 BIT] (CQ, 66)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
079 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 67 [2 BIT] (CQ, 67)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
080 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 68 [2 BIT] (CQ, 68)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0

B-780

APPENDIX B

MIL-STD-6016B

DFI NAME
1725 CONNECTIVITY QUALITY

DUI NAME	EXPLANATION	APPLICABILITY
081 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 69 [2 BIT] (CQ, 69)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
082 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 70 [2 BIT] (CQ, 70)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
083 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 71 [2 BIT] (CQ, 71)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
084 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 72 [2 BIT] (CQ, 72)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
085 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 73 [2 BIT] (CQ, 73)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
086 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 74 [2 BIT] (CQ, 74)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
087 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 75 [2 BIT] (CQ, 75)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
088 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 76 [2 BIT] (CQ, 76)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
089 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 77 [2 BIT] (CQ, 77)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
090 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 78 [2 BIT] (CQ, 78)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0

B-781

DFI NAME
1725 CONNECTIVITY QUALITY

DUI NAME	EXPLANATION	APPLICABILITY
091 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 79 [2 BIT] (CQ, 79)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
092 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 80 [2 BIT] (CQ, 80)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
093 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 81 [2 BIT] (CQ, 81)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
094 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 82 [2 BIT] (CQ, 82)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
095 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 83 [2 BIT] (CQ, 83)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
096 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 84 [2 BIT] (CQ, 84)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
097 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 85 [2 BIT] (CQ, 85)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
098 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 86 [2 BIT] (CQ, 86)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
099 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 87 [2 BIT] (CQ, 87)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
100 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 88 [2 BIT] (CQ, 88)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0

B-782

APPENDIX B

MIL-STD-6016B

DFI NAME
1725 CONNECTIVITY QUALITY

DUI NAME	EXPLANATION	APPLICABILITY
101 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 89 [2 BIT] (CQ, 89)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
102 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 90 [2 BIT] (CQ, 90)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
103 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 91 [2 BIT] (CQ, 91)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
104 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 92 [2 BIT] (CQ, 92)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
105 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 93 [2 BIT] (CQ, 93)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
106 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 94 [2 BIT] (CQ, 94)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
107 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 95 [2 BIT] (CQ, 95)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
108 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 96 [2 BIT] (CQ, 96)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
109 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 97 [2 BIT] (CQ, 97)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
110 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 98 [2 BIT] (CQ, 98)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0

B-783

APPENDIX B

MIL-STD-6016B

DFI NAME
1725 CONNECTIVITY QUALITY

DUI NAME	EXPLANATION	APPLICABILITY
111 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 99 [2 BIT] (CQ, 99)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
112 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 100 [2 BIT] (CQ, 100)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
113 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 101 [2 BIT] (CQ, 101)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
114 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 102 [2 BIT] (CQ, 102)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
115 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 103 [2 BIT] (CQ, 103)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
116 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 104 [2 BIT] (CQ, 104)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
117 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 105 [2 BIT] (CQ, 105)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
118 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 106 [2 BIT] (CQ, 106)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
119 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 107 [2 BIT] (CQ, 107)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
120 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 108 [2 BIT] (CQ, 108)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0

B-784

APPENDIX B

MIL-STD-6016B

DFI NAME
1725 CONNECTIVITY QUALITY

DUI NAME	EXPLANATION	APPLICABILITY
121 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 109 [2 BIT] (CQ, 109)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
122 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 110 [2 BIT] (CQ, 110)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
123 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 111 [2 BIT] (CQ, 111)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
124 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 112 [2 BIT] (CQ, 112)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
125 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 113 [2 BIT] (CQ, 113)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
126 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 114 [2 BIT] (CQ, 114)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
127 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 115 [2 BIT] (CQ, 115)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
128 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 116 [2 BIT] (CQ, 116)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
129 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 117 [2 BIT] (CQ, 117)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
130 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 118 [2 BIT] (CQ, 118)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0

B-785

APPENDIX B

MIL-STD-6016B

DFI NAME
1725 CONNECTIVITY QUALITY

DUI NAME	EXPLANATION	APPLICABILITY
131 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 119 [2 BIT] (CQ, 119)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
132 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 120 [2 BIT] (CQ, 120)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
133 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 121 [2 BIT] (CQ, 121)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
134 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 122 [2 BIT] (CQ, 122)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
135 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 123 [2 BIT] (CQ, 123)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
136 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 124 [2 BIT] (CQ, 124)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
137 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 125 [2 BIT] (CQ, 125)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
138 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 126 [2 BIT] (CQ, 126)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
139 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 127 [2 BIT] (CQ, 127)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0
140 CONNECTIVITY QUALITY, INTRA-COMMUNITY COMMUNICANT 128 [2 BIT] (CQ, 128)	A MEASURE OF THE DIRECT LINK QUALITY OF MESSAGES BEING MONITORED FOR ERASURES IN A SINGLE TIME SLOT.	J1.4E0

B-786

APPENDIX B

MIL-STD-6016B

DFI NAME
1725 CONNECTIVITY QUALITY

DUI NAME	EXPLANATION	APPLICABILITY
141 MINIMUM CONNECTIVITY QUALITY REQUESTED [2 BIT] (CQ MIN)	INDICATES THE MINIMUM CONNECTIVITY QUALITY ALL ALONG THE ROUTE REQUESTED BY THE ORIGINATOR UNIT.	J1.2I
142 MAXIMUM CONNECTIVITY QUALITY PROVIDED [2 BIT] (CQ MAX)	INDICATES THE MAXIMUM CONNECTIVITY QUALITY OF THE ROUTE.	J1.2I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001-140 -----		
NO MESSAGE RECEIVED FROM ASSOCIATED SOURCE OR ERASURE COUNT EXCEEDS 12(8-57,1) ERASURES	0	
LESS THAN OR EQUAL TO 12(8-57,1) ERASURES	1	
LESS THAN OR EQUAL TO 8(4-48,1) ERASURES	2	
LESS THAN OR EQUAL TO 4(1-32,1) ERASURES	3	
----- FOR DUIS 141-142 -----		
NUMERIC	0 THROUGH 3	0 LOWEST CONNECTIVITY QUALITY. 3 HIGHEST CONNECTIVITY QUALITY.

B-787

MIL-STD-6016B
APPENDIX B

DFI	NAME	DEFINITION
1726	CONNECTIVITY INTERROGATION INSTRUCTION	INDICATES WHAT TYPE OF CONNECTIVITY IS BEING REQUESTED FROM THE ADDRESSEE(S) TO SUPPORT ROUTE ESTABLISHMENT.
DATA STANDARD USAGE: Link 16		STATUS:
DUI NAME	EXPLANATION	APPLICABILITY
001 CONNECTIVITY INTERROGATION INSTRUCTION [2 BIT] (CII)	INDICATES WHAT TYPE OF CONNECTIVITY IS BEING REQUESTED FROM THE ADDRESSEE(S) TO SUPPORT ROUTE ESTABLISHMENT.	J1.0I
DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
BROADCAST	0	BROADCAST REQUEST FROM ANY UNIT WITHIN LINE-OF-SIGHT TO SOURCE. DISREGARD ROUTE NUMBER AND UPDATE RECURRENCE RATE.
DIRECT CONNECTIVITY REQUEST	1	ADDRESSED TO JU(S) REFERENCED IN MESSAGE FOR THEIR DIRECT CONNECTIVITY.
INDIRECT CONNECTIVITY REQUEST, LEVEL 1	2	ADDRESSED TO JU(S) ASSOCIATED WITH SOURCE JU ROUTE NUMBER TO ELICIT THEIR CONNECTIVITY WITH RESPECT TO THE JU(S) REFERENCED IN MESSAGE.
INDIRECT CONNECTIVITY REQUEST, LEVEL 2	3	ADDRESSED TO JU(S) ASSOCIATED WITH SOURCE JU ROUTE NUMBER TO ELICIT THE CONNECTIVITY OF THE JU(S) REFERENCED IN MESSAGE.

DFI	NAME	DEFINITION
1727	ROUTE NUMBER	INDICATES A NUMBER WITHIN THE ROUTE DIRECTORY THAT IS ASSOCIATED WITH THE SOURCE OF THE MESSAGE. THE ROUTE DIRECTORY INCLUDES RELAY/DESTINATION TRACK NUMBERS FOR EACH SOURCE TRACK NUMBER.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 ROUTE NUMBER [4 BIT]	INDICATES A NUMBER WITHIN THE ROUTE DIRECTORY THAT IS ASSOCIATED WITH THE SOURCE OF THE MESSAGE. THE ROUTE DIRECTORY INCLUDES RELAY/ DESTINATION TNS FOR EACH SOURCE TN.	J1.0I

002 ROUTE NUMBER, 2 [4 BIT]		J0.5I
--------------------------------	--	-------

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
ROUTE NUMBER	0 THROUGH 15	ROUTE DIRECTORY INDEX ASSOCIATED WITH SOURCE OF MESSAGE. THE ROUTE DIRECTORY INCLUDES RELAY/ DESTINATION JU TNS FOR EACH SOURCE JU ROUTE NUMBER.
----- FOR DUI 002 -----		
NUMERIC	0 THROUGH 15	0: NO STATEMENT 1 THROUGH 15: INDICATES THE ROUTE NUMBER.

DFI	NAME	DEFINITION
1728	CONNECTIVITY STATUS INSTRUCTION	INDICATES WHETHER THE CONNECTIVITY OF THE SOURCE TRACK NUMBER AS REPORTED IN THE MESSAGE IS BEING ADDED OR DELETED.

DATA STANDARD USAGE: Link 16	STATUS:
------------------------------	---------

DUI NAME	EXPLANATION	APPLICABILITY
001 CONNECTIVITY STATUS INSTRUCTION [2 BIT] (CSI)	INDICATES WHETHER THE CONNECTIVITY OF THE SOURCE TRACK NUMBER AS REPORTED IN THE MESSAGE IS BEING ADDED OR DELETED.	J1.1I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
ADDED CONNECTIVITY	0	
DELETED CONNECTIVITY	1	
UNDEFINED	2 THROUGH 3	

DFI NAME
1729 CONNECTIVITY STATUS LEVEL

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME

EXPLANATION

APPLICABILITY

001 CONNECTIVITY STATUS LEVEL
[3 BIT] (CON STS)

J1.1I

DATA ITEM

BIT CODE

EXPLANATION

----- FOR DUI 001 -----

CONNECTIVITY LEVEL, 0

0

CONNECTIVITY TO REFERENCED JU(S) IS
DIRECTLY THROUGH SOURCE JU.

CONNECTIVITY LEVEL, 1

1

CONNECTIVITY TO REFERENCED JU(S) IS
THROUGH SOURCE JU AND JU 1.

CONNECTIVITY LEVEL, 2

2

CONNECTIVITY TO REFERENCED JU(S) IS
THROUGH SOURCE JU, JU 1, AND JU 2.

CONNECTIVITY LEVEL, 3

3

CONNECTIVITY TO REFERENCED JU(S) IS
THROUGH SOURCE JU, JU 1, JU 2, AND
JU 3.

CONNECTIVITY LEVEL, 4

4

CONNECTIVITY TO REFERENCED JU(S) IS
THROUGH SOURCE JU, JU 1, JU 2, JU
3 AND JU 4.

CONNECTIVITY LEVEL, 5

5

CONNECTIVITY TO REFERENCED JU(S) IS
THROUGH SOURCE JU, JU 1, JU 2, JU
3, JU 4 AND JU 5.

CONNECTIVITY LEVEL, 6

6

CONNECTIVITY TO REFERENCED JU(S) IS
THROUGH SOURCE JU, JU 1, JU 2, JU
3, JU 4, JU 5 AND JU 6.

CONNECTIVITY LEVEL, 7

7

CONNECTIVITY TO REFERENCED JU(S) IS
THROUGH SOURCE JU, JU 1, JU 2, JU
3, JU 4, JU 5, JU 6 AND JU 7.

DFI NAME
1734 RELAY ROUTE INDICATOR
PARAMETERS

DEFINITION
AN INDICATOR THAT IF MATCHES THE ROUTE NUMBER, THE MESSAGE IS
TO BE REPROMULGATED.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 RRIP, ROUTE 1 [1 BIT] (RRI 1)	SPECIFIES THE RELAY ROUTE INDICATOR PARAMETER FOR ROUTE 1.	J0.4C2
002 RRIP, ROUTE 2 [1 BIT] (RRI 2)	SPECIFIES THE RELAY ROUTE INDICATOR PARAMETER FOR ROUTE 2.	J0.4C2
003 RRIP, ROUTE 3 [1 BIT] (RRI 3)	SPECIFIES THE RELAY ROUTE INDICATOR PARAMETER FOR ROUTE 3.	J0.4C2
004 RRIP, ROUTE 4 [1 BIT] (RRI 4)	SPECIFIES THE RELAY ROUTE INDICATOR PARAMETER FOR ROUTE 4.	J0.4C2
005 RRIP, ROUTE 5 [1 BIT] (RRI 5)	SPECIFIES THE RELAY ROUTE INDICATOR PARAMETER FOR ROUTE 5.	J0.4C2
006 RRIP, ROUTE 6 [1 BIT] (RRI 6)	SPECIFIES THE RELAY ROUTE INDICATOR PARAMETER FOR ROUTE 6.	J0.4C2
007 RRIP, ROUTE 7 [1 BIT] (RRI 7)	SPECIFIES THE RELAY ROUTE INDICATOR PARAMETER FOR ROUTE 7.	J0.4C2
008 RRIP, ROUTE 8 [1 BIT] (RRI 8)	SPECIFIES THE RELAY ROUTE INDICATOR PARAMETER FOR ROUTE 8.	J0.4C2
009 RRIP, ROUTE 9 [1 BIT] (RRI 9)	SPECIFIES THE RELAY ROUTE INDICATOR PARAMETER FOR ROUTE 9.	J0.4C2
010 RRIP, ROUTE 10 [1 BIT] (RRI 10)	SPECIFIES THE RELAY ROUTE INDICATOR PARAMETER FOR ROUTE 10.	J0.4C2
011 RRIP, ROUTE 11 [1 BIT] (RRI 11)	SPECIFIES THE RELAY ROUTE INDICATOR PARAMETER FOR ROUTE 11.	J0.4C2
012 RRIP, ROUTE 12 [1 BIT] (RRI 12)	SPECIFIES THE RELAY ROUTE INDICATOR PARAMETER FOR ROUTE 12.	J0.4C2
013 RRIP, ROUTE 13 [1 BIT] (RRI 13)	SPECIFIES THE RELAY ROUTE INDICATOR PARAMETER FOR ROUTE 13.	J0.4C2

DFI	NAME		
1734	RELAY ROUTE INDICATOR PARAMETERS		
	DUI NAME	EXPLANATION	APPLICABILITY
	014 RRIP, ROUTE 14 [1 BIT] (RRI 14)	SPECIFIES THE RELAY ROUTE INDICATOR PARAMETER FOR ROUTE 14.	J0.4C2
	015 RRIP, ROUTE 15 [1 BIT] (RRI 15)	SPECIFIES THE RELAY ROUTE INDICATOR PARAMETER FOR ROUTE 15.	J0.4C2
	DATA ITEM	BIT CODE	EXPLANATION
	----- FOR DUI 001-015 -----		
	REPROMULGATE	0	
	DO NOT REPROMULGATE	1	

DFI NAME
1735 INTEREST ROUTE INDICATOR
PARAMETERS

DEFINITION
AN INDICATOR THAT THE MESSAGE IS OF INTEREST TO THE JU AND IS
TO BE FORWARDED TO ITS HOST.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 IRIP, ROUTE 1 [1 BIT] (IRI 1)	SPECIFIES THE INTEREST ROUTE INDICATOR PARAMETER FOR ROUTE 1.	J0.4C2
002 IRIP, ROUTE 2 [1 BIT] (IRI 2)	SPECIFIES THE INTEREST ROUTE INDICATOR PARAMETER FOR ROUTE 2.	J0.4C2
003 IRIP, ROUTE 3 [1 BIT] (IRI 3)	SPECIFIES THE INTEREST ROUTE INDICATOR PARAMETER FOR ROUTE 3.	J0.4C2
004 IRIP, ROUTE 4 [1 BIT] (IRI 4)	SPECIFIES THE INTEREST ROUTE INDICATOR PARAMETER FOR ROUTE 4.	J0.4C2
005 IRIP, ROUTE 5 [1 BIT] (IRI 5)	SPECIFIES THE INTEREST ROUTE INDICATOR PARAMETER FOR ROUTE 5.	J0.4C2
006 IRIP, ROUTE 6 [1 BIT] (IRI 6)	SPECIFIES THE INTEREST ROUTE INDICATOR PARAMETER FOR ROUTE 6.	J0.4C2
007 IRIP, ROUTE 7 [1 BIT] (IRI 7)	SPECIFIES THE INTEREST ROUTE INDICATOR PARAMETER FOR ROUTE 7.	J0.4C2
008 IRIP, ROUTE 8 [1 BIT] (IRI 8)	SPECIFIES THE INTEREST ROUTE INDICATOR PARAMETER FOR ROUTE 8.	J0.4C2
009 IRIP, ROUTE 9 [1 BIT] (IRI 9)	SPECIFIES THE INTEREST ROUTE INDICATOR PARAMETER FOR ROUTE 9.	J0.4C2
010 IRIP, ROUTE 10 [1 BIT] (IRI 10)	SPECIFIES THE INTEREST ROUTE INDICATOR PARAMETER FOR ROUTE 10.	J0.4C2
011 IRIP, ROUTE 11 [1 BIT] (IRI 11)	SPECIFIES THE INTEREST ROUTE INDICATOR PARAMETER FOR ROUTE 11.	J0.4C2
012 IRIP, ROUTE 12 [1 BIT] (IRI 12)	SPECIFIES THE INTEREST ROUTE INDICATOR PARAMETER FOR ROUTE 12.	J0.4C2
013 IRIP, ROUTE 13 [1 BIT] (IRI 13)	SPECIFIES THE INTEREST ROUTE INDICATOR PARAMETER FOR ROUTE 13.	J0.4C2

APPENDIX B

DFI NAME
1735 INTEREST ROUTE INDICATOR
PARAMETERS

DUI NAME	EXPLANATION	APPLICABILITY
014 IRIP, ROUTE 14 [1 BIT] (IRI 14)	SPECIFIES THE INTEREST ROUTE INDICATOR PARAMETER FOR ROUTE 14.	J0.4C2
015 IRIP, ROUTE 15 [1 BIT] (IRI 15)	SPECIFIES THE INTEREST ROUTE INDICATOR PARAMETER FOR ROUTE 15.	J0.4C2

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001-015 -----		
FORWARD	0	
DO NOT FORWARD	1	

DFI NAME
1740 ACTION/INFORMATION INDICATOR

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
004 ACTION/INFORMATION INDICATOR, 4 [2 BIT] (AII 4)	INDICATES THE ACTION TO BE PERFORMED FOR REPROM RELAY REPORTING.	J1.2I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 004 -----		
NO STATEMENT	0	
ROUTE REQUEST	1	
ROUTE ESTABLISHMENT	2	
ROUTE DELETION	3	

DFI	NAME	DEFINITION
1743	PROPRIETARY FORMAT	SPECIFIES THE DATA FORMAT USED IN CONVEYING THE INFORMATION IN PROPRIETARY USE MESSAGES.
DATA STANDARD USAGE: Link 16		STATUS:
DUI	NAME	EXPLANATION
001	AF PROPRIETARY FORMAT [5 BIT]	AIR FORCE SPECIFIES THE DATA FORMAT USED IN CONVEYING THE INFORMATION IN PROPRIETARY USE MESSAGES.
	DATA ITEM	APPLICABILITY
	----- FOR DUI 001 -----	J28.20I
	TEXT MESSAGE	0
	ILLEGAL	1 THROUGH 31

DFI NAME
1744 PROPRIETARY INFORMATION

DEFINITION
INFORMATION RESERVED FOR THE EXCLUSIVE USE OF A SERVICE/
NATION.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
001 PROPRIETARY INFORMATION [57 BIT]	INFORMATION RESERVED FOR THE EXCLUSIVE USE OF A SERVICE/NATION.	J28.0I	J28.1I	J28.2I
		J28.3I	J28.4I	J28.5I
		J28.6I	J28.7I	J29.1I
		J29.3I	J29.4I	J29.5I
		J29.7I	J30.0I	J30.1I
		J30.2I	J30.3I	J30.4I
		J30.5I	J30.6I	J30.7I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		

DATA ITEM NAMES, BIT CODING, AND
EXPLANATIONS ARE SPECIFIED IN THE
APPROPRIATE SERVICE/NATION
DOCUMENTATION.

DFI	NAME	DEFINITION
1745	FILTER INDICATOR	THIS INDICATOR IS USED TO DESCRIBE THE FILTER(S) A JU HAS EMPLOYED, THE FILTER(S) A JU REQUESTED TO IMPLEMENT, OR THE FILTER(S) A JU IS REQUESTED TO DELETE.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 ENV/CAT UNKNOWN FILTER INDICATOR [1 BIT] (FIL UNK)	THIS INDICATOR IS USED TO DESCRIBE AN ENVIRONMENT/CATEGORY FILTER.	J7.6I
002 ENV/CAT SPACE FILTER INDICATOR [1 BIT] (FIL SPC)	THIS INDICATOR IS USED TO DESCRIBE AN ENVIRONMENT/CATEGORY FILTER.	J7.6I
003 ENV/CAT AIR FILTER INDICATOR [1 BIT] (FIL AIR)	THIS INDICATOR IS USED TO DESCRIBE AN ENVIRONMENT/CATEGORY FILTER.	J7.6I
004 ENV/CAT SURFACE (MARITIME) FILTER INDICATOR [1 BIT] (FIL SUR)	THIS INDICATOR IS USED TO DESCRIBE AN ENVIRONMENT/CATEGORY FILTER.	J7.6I
005 ENV/CAT SUBSURFACE (MARITIME) FILTER INDICATOR [1 BIT] (FIL SUB)	THIS INDICATOR IS USED TO DESCRIBE AN ENVIRONMENT/CATEGORY FILTER.	J7.6I
006 ENV/CAT LAND (GROUND) POINT FILTER INDICATOR [1 BIT] (FIL PTS)	THIS INDICATOR IS USED TO DESCRIBE AN ENVIRONMENT/CATEGORY FILTER.	J7.6I
007 ENV/CAT LAND (GROUND) TRACK FILTER INDICATOR [1 BIT] (FIL TKS)	THIS INDICATOR IS USED TO DESCRIBE AN ENVIRONMENT/CATEGORY FILTER.	J7.6I
008 SPARE ENV/CAT FILTER INDICATOR [1 BIT] (FIL SP)	THIS INDICATOR IS RESERVED FOR USE AS AN ENVIRONMENT/CATEGORY FILTER INDICATOR FOR ENVIRONMENT/CATEGORY VALUES SIX AND SEVEN WHICH ARE CURRENTLY UNDEFINED. THIS INDICATOR IS ALWAYS SET TO ZERO.	J7.6I
009 SPECIAL PROCESSING FILTER INDICATOR [1 BIT] (FIL SPI)	THIS INDICATOR IS USED TO DESCRIBE A SPECIAL PROCESSING FILTER.	J7.6I

B-799

MIL-STD-6016B
APPENDIX B

DFI NAME
1745 FILTER INDICATOR

DUI NAME	EXPLANATION	APPLICABILITY
010 SIMULATION FILTER INDICATOR [1 BIT] (FIL SIM)	THIS INDICATOR IS USED IN CONJUNCTION WITH THE OTHER FILTER INDICATORS TO DESCRIBE FILTERS FOR SIMULATED DATA.	J7.6I
013 ELECTRONIC WARFARE FILTER INDICATOR [1 BIT] (FIL EW)	THIS INDICATOR IS USED IN CONJUNCTION WITH THE OTHER FILTER INDICATORS TO DESCRIBE FILTERS FOR ELECTRONIC WARFARE DERIVED DATA.	J7.6I
014 REFERENCE POINT FILTER INDICATOR [1 BIT] (FIL REF)	THIS INDICATOR IS USED TO DESCRIBE A FILTER FOR ALL REFERENCE POINTS.	J7.6I
015 PENDING IDENTITY FILTER INDICATOR [1 BIT] (FIL PEN)	THIS INDICATOR IN CONJUNCTION WITH THE OTHER FILTER INDICATORS DESCRIBE IDENTITY FILTERS.	J7.6I
016 UNKNOWN IDENTITY FILTER INDICATOR [1 BIT] (FIL UNK)	THIS INDICATOR IN CONJUNCTION WITH THE OTHER FILTER INDICATORS DESCRIBE IDENTITY FILTERS.	J7.6I
017 ASSUMED FRIEND IDENTITY FILTER INDICATOR [1 BIT] (FIL AFR)	THIS INDICATOR IN CONJUNCTION WITH THE OTHER FILTER INDICATORS DESCRIBE IDENTITY FILTERS.	J7.6I
018 FRIEND IDENTITY FILTER INDICATOR [1 BIT] (FIL FRD)	THIS INDICATOR IN CONJUNCTION WITH THE OTHER FILTER INDICATORS DESCRIBE IDENTITY FILTERS.	J7.6I
019 NEUTRAL IDENTITY FILTER INDICATOR [1 BIT] (FIL NEU)	THIS INDICATOR IN CONJUNCTION WITH THE OTHER FILTER INDICATORS DESCRIBE IDENTITY FILTERS.	J7.6I
020 SUSPECT IDENTITY FILTER INDICATOR [1 BIT] (FIL SUS)	THIS INDICATOR IN CONJUNCTION WITH THE OTHER FILTER INDICATORS DESCRIBE IDENTITY FILTERS.	J7.6I
021 HOSTILE IDENTITY FILTER INDICATOR [1 BIT] (FIL HOS)	THIS INDICATOR IN CONJUNCTION WITH THE OTHER FILTER INDICATORS DESCRIBE IDENTITY FILTERS.	J7.6I

B-800

MIL-STD-6016B
APPENDIX B

DFI NAME
1745 FILTER INDICATOR

DUI NAME	EXPLANATION	APPLICABILITY
022 SPARE IDENTITY FILTER INDICATOR [1 BIT] (FIL SID)	THIS INDICATOR IS RESERVED FOR USE AS AN IDENTITY FILTER INDICATOR FOR IDENTITY VALUE SEVEN WHICH IS CURRENTLY UNDEFINED. THIS INDICATOR IS ALWAYS SET TO ZERO.	J7.6I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001-010 AND 013-022 -----		
NO STATEMENT	0	
FILTER	1	

DFI	NAME	DEFINITION
1747	FILTER NUMBER	A NUMBER ASSIGNED BY A UNIT TO IDENTIFY A SPECIFIC FILTER.
DATA STANDARD USAGE: Link 16		STATUS:
DUI NAME	EXPLANATION	APPLICABILITY
001 FILTER NUMBER [4 BIT]	A NUMBER ASSIGNED BY A UNIT TO IDENTIFY A SPECIFIC FILTER.	J7.1I J7.6I
DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT FILTER NUMBER	0 1 THROUGH 14	UNIQUE FILTER NUMBERS ASSIGNED BY A UNIT.
ALL FILTERS	15	

NAME	DEFINITION	
1748 GEOGRAPHIC AREA FILTERED	A VALUE THAT DELINEATES AN AREA WHICH IS USED TO DESCRIBE THE LIMITS OF A FILTER'S USE.	
DATA STANDARD USAGE: Link 16		
STATUS:		
DUI NAME	EXPLANATION	APPLICABILITY
001 GEOGRAPHIC AREA FILTERED [5 BIT]	A VALUE THAT DELINEATES AN AREA WHICH IS USED TO DESCRIBE THE LIMITS OF A FILTER'S USE.	J7.6I
DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
INHIBIT TRACKS NORTHEAST OF LINE	1	
INHIBIT TRACKS NORTHWEST OF LINE	2	
INHIBIT TRACKS SOUTHEAST OF LINE	3	
INHIBIT TRACKS SOUTHWEST OF LINE	4	
INHIBIT TRACKS WITHIN DESCRIBED RECTANGLE	5	
INHIBIT TRACKS OUTSIDE OF DESCRIBED RECTANGLE	6	
INHIBIT TRACKS WITHIN DESCRIBED NESTED RECTANGLE	7	
INHIBIT TRACKS OUTSIDE OF DESCRIBED NESTED RECTANGLE	8	
INHIBIT TRACKS WITHIN DESCRIBED CIRCLE	9	
INHIBIT TRACKS OUTSIDE OF DESCRIBED CIRCLE	10	
INHIBIT TRACKS WITHIN DESCRIBED ANNULUS	11	
INHIBIT TRACKS OUTSIDE OF DESCRIBED ANNULUS	12	
INHIBIT TRACKS WITHIN DESCRIBED CIRCULAR SECTOR	13	

DFI NAME
1748 GEOGRAPHIC AREA FILTERED

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
INHIBIT TRACKS OUTSIDE OF DESCRIBED CIRCULAR SECTOR	14	
INHIBIT TRACKS WITHIN DESCRIBED SECTOR OF AN ANNULUS	15	
INHIBIT TRACKS OUTSIDE OF DESCRIBED SECTOR OF AN ANNULUS	16	
UNDEFINED	17 THROUGH 31	

DFI	NAME	DEFINITION
1750	CONTROLLING UNIT INDICATOR	THIS INDICATOR IDENTIFIES WHETHER OR NOT THE MESSAGE IN WHICH IT IS CONTAINED HAS BEEN ORIGINATED FROM A CONTROLLING UNIT.

DATA STANDARD USAGE: Link 16	STATUS:
------------------------------	---------

DUI NAME	EXPLANATION	APPLICABILITY
001 CONTROLLING UNIT INDICATOR [1 BIT] (CUI)	THIS INDICATOR IDENTIFIES WHETHER OR NOT THE MESSAGE IN WHICH IT IS CONTAINED HAS BEEN ORIGINATED FROM A CONTROLLING UNIT.	J7.0I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
THIS MESSAGE DID NOT ORIGINATE FROM THE CONTROLLING UNIT	0	
THIS MESSAGE ORIGINATED FROM THE CONTROLLING UNIT	1	

DFI	NAME	DEFINITION
1751	ALERT STATUS CHANGE	THIS FIELD INDICATES THE ACTION TO BE ACCOMPLISHED TO THE REFERENCE TRACK NUMBER'S EMERGENCY OR FORCE TELL INDICATOR AS SPECIFIED BY THE ACTION VALUE OF THE ACTION, TRACK MANAGEMENT FIELD.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 ALERT STATUS CHANGE [1 BIT] (ALT CHN)	THIS FIELD INDICATES THE ACTION TO BE ACCOMPLISHED (TO THE REFERENCE TN'S EMERGENCY OR FORCE TELL INDICATOR) AS SPECIFIED BY THE ACTION VALUE OF THE ACTION, TRACK MANAGEMENT FIELD.	J7.0I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
CLEAR ALERT STATUS INDICATOR	0	CHANGE THE REFERENCE TN'S EMERGENCY OR FORCE TELL INDICATOR (AS SPECIFIED BY THE ACTION VALUE OF THE ACTION, TRACK MANAGEMENT FIELD) FROM VALUE 1 TO VALUE 0.
SET ALERT STATUS INDICATOR	1	CHANGE THE REFERENCE TN'S EMERGENCY OR FORCE TELL INDICATOR (AS SPECIFIED BY THE ACTION VALUE OF THE ACTION, TRACK MANAGEMENT FIELD) FROM VALUE 0 TO VALUE 1.

DFI	NAME	DEFINITION
1752	SPECIAL CODE	A SPECIAL CODE FOR IDENTIFICATION PURPOSES.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 SPECIAL CODE I [5 BIT]	A SPECIAL CODE USED FOR IDENTIFICATION.	J7.5I
002 SPECIAL CODE II [12 BIT]	A SPECIAL CODE USED FOR IDENTIFICATION.	J7.5I
003 SPECIAL CODE III [12 BIT]	A SPECIAL CODE USED FOR IDENTIFICATION.	J7.5I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
0 THROUGH 37 (OCTAL)	00 THROUGH 37 (OCTAL)	
----- FOR DUI 002 AND 003 -----		
0 THROUGH 7777 (OCTAL)	0000 THROUGH 7777 (OCTAL)	

DFI NAME
1762 THREAT TYPE

DEFINITION
DESCRIBES THE GENERAL TYPE OF THREAT REPORTED.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
002 THREAT TYPE [4 BIT]	DESCRIBES THE TYPE OF THREAT ABOUT TO BE ENCOUNTERED BY THE FRIENDLY UNIT DESCRIBED IN THE ADDRESSEE TN OR TARGETED TN FIELD.	J6.0C1 J15.0I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 002 -----		
NO STATEMENT	0	
UNKNOWN	1	
AIR-TO-SURFACE MISSILE	2	
NUCLEAR, BIOLOGICAL, CHEMICAL	3	
SURFACE-TO-SURFACE MISSILE	4	
SURFACE-TO-AIR MISSILE	5	
AIR-TO-AIR MISSILE	6	
AIRCRAFT	7	
ANTIAIRCRAFT ARTILLERY	8	
SHIP	9	
SUBMARINE	10	
SATELLITE	11	
REMOTELY PILOTED VEHICLE/UNATTENDED AIRBORNE VEHICLE	12	
TORPEDO	13	
ANTI-SHIP CRUISE MISSILE	14	
UNDEFINED	15	

DFI NAME DEFINITION
1767 ESTIMATED YIELD AN ESTIMATE OF THE YIELD OF A NUCLEAR DETONATION EXPRESSED IN MEGATONS.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 ESTIMATED YIELD [2 BIT] (EST YLD)	AN ESTIMATE OF THE YIELD OF A NUCLEAR DETONATION EXPRESSED IN MEGATONS, AND IS USED ONLY WITH POINT TYPE = 0, POINT AMP = 4.	J3.0E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
SMALL	1	LESS THAN 0.1 MEGATON.
MEDIUM	2	0.1 TO 1.0 MEGATON.
LARGE	3	GREATER THAN 1.0 MEGATON.

DFI NAME
1768 TYPE OF BURST

DEFINITION
EXPRESSES THE TYPE OF BURST FROM A NUCLEAR DETONATION.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 TYPE OF BURST [3 BIT]	EXPRESSES THE TYPE OF BURST FROM A NUCLEAR DETONATION, AND IS USED ONLY WITH POINT TYPE = 0, POINT AMP = 4.	J3.0E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
UNKNOWN	1	
AIR	2	
SURFACE, GROUND	3	
UNDERGROUND	4	
SURFACE, WATER	5	
UNDERWATER	6	
SPACE	7	

DFI	NAME	DEFINITION
1769	ACTION, COMMUNICATION CONTROL	DESCRIBES THE COMMUNICATIONS CONTROL ACTION TO BE ACCOMPLISHED.

DATA STANDARD USAGE: Link 16	STATUS:
------------------------------	---------

DUI NAME	EXPLANATION	APPLICABILITY
001 ACTION, COMMUNICATION CONTROL [2 BIT] (COM CON)	DESCRIBES THE COMMUNICATIONS CONTROL ACTION TO BE ACCOMPLISHED.	J0.6I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
TERMINAL INTERROGATION	0	THE RECEIVING TERMINAL IS TO TRANSMIT THE MESSAGE INDICATED IN THE TIME SLOT SPECIFIED. ONLY THE J0.1 OR J2 MESSAGES WITH AN APPROPRIATE SUBLABEL MAY BE REQUESTED.
INITIATE TRANSMISSION	1	THE RECEIVING HOST SYSTEM IS TO TRANSMIT AVAILABLE INFORMATION IN THE PARTICIPATION GROUP INDICATED UNTIL ALL AVAILABLE INFORMATION HAS BEEN TRANSMITTED, OR UNTIL THE TIME PERIOD INDICATED BY THE TRANSMISSION TIME LIMIT GIVEN IN THE TRANSMISSION TERMINATION DESIGNATOR FIELD HAS EXPIRED.
TERMINATE TRANSMISSION	2	THE RECEIVING HOST SYSTEM HAS TERMINATED TRANSMISSION OF THE INFORMATION IN THE PARTICIPATION GROUP INDICATED.
CONTROL REQUEST	3	THE RECEIVING HOST SYSTEM IS REQUESTED TO TAKE ACTION AS INDICATED IN THE CONTINUATION WORD.

DFI	NAME	DEFINITION
1770	TRANSMISSION TERMINATION DESIGNATOR	DEFINES THE MAXIMUM TIME ALLOWABLE FOR MESSAGE TRANSMISSION IN THE PARTICIPATION GROUP INDICATED.
DATA STANDARD USAGE: Link 16		STATUS:
DUI NAME	EXPLANATION	APPLICABILITY
001 TRANSMISSION TERMINATION DESIGNATOR [4 BIT] (TT DES)	DEFINES THE MAXIMUM TIME ALLOWABLE FOR MESSAGE TRANSMISSION IN THE PARTICIPATION GROUP INDICATED.	J0.6I
DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO TIME LIMIT SPECIFIED	0	THE RECEIVING HOST SYSTEM IS TO TRANSMIT ALL AVAILABLE INFORMATION IN THE PARTICIPATION GROUP INDICATED TAKING WHATEVER TIME PERIOD THAT IS REQUIRED.
RECURRENCE RATE NUMBER FOR COMPUTING TRANSMISSION TIME LIMIT	1 THROUGH 15	THE RECEIVING HOST SYSTEM IS TO TRANSMIT ALL AVAILABLE INFORMATION IN THE PARTICIPATION GROUP INDICATED FOR A TIME PERIOD IN SECONDS NOT TO EXCEED 3 X (2 TO THE POWER (8-RRN)).

DFI NAME
1771 ACTION, TIME SLOT ASSIGNMENT

DEFINITION
DESCRIBES THE TIME SLOT ASSIGNMENT ACTION THAT IS BEING REQUESTED.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 ACTION, TIME SLOT REQUEST [2 BIT] (ACT TSR)	DESCRIBES THE TIME SLOT ASSIGNMENT ACTION THAT IS BEING REQUESTED.	J0.6C1

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
ASSIGNMENT REQUEST	0	THE ORIGINATOR OF THIS MESSAGE REQUESTS ASSIGNMENT OF ADDITIONAL TIME SLOT BLOCKS AS INDICATED.
DEASSIGNMENT REQUEST	1	THE ORIGINATOR OF THIS MESSAGE CAN RELEASE THE INDICATED TIME SLOT BLOCKS.
REASSIGNMENT REQUEST	2	THE ORIGINATOR OF THIS MESSAGE REQUESTS THE REASSIGNMENT OF THE INDICATED TIME SLOT BLOCKS TO THE PARTICIPATION GROUP GIVEN IN THE INITIAL WORD.
UNDEFINED	3	

DFI	NAME	DEFINITION
1772	ACCESS DESCRIPTION	DESCRIBES THE ACCESS MODE AND ASSOCIATED PARAMETERS CONNECTED WITH THE ASSIGNMENT OF TIME SLOTS.

DATA STANDARD USAGE: Link 16	STATUS:
------------------------------	---------

DUI NAME	EXPLANATION	APPLICABILITY
001 ACCESS DESCRIPTION [6 BIT]	DESCRIBES THE ACCESS MODE AND ASSOCIATED PARAMETERS CONNECTED WITH THE ASSIGNMENT OF TIME SLOTS.	J0.3E0
002 ACCESS RATE, RTT-B [4 BIT]		J0.0I
003 ACCESS RATE, PPLI A [4 BIT]		J0.0E0
004 ACCESS RATE, PPLI B [4 BIT]		J0.0I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
CONTENTION ACCESS MODE/ RATE, 1	0	ONE TRANSMISSION PER 48 SECONDS.
CONTENTION ACCESS MODE/ RATE, 2	1	TWO TRANSMISSIONS PER 48 SECONDS.
CONTENTION ACCESS MODE/ RATE, 3	2	THREE TRANSMISSIONS PER 48 SECONDS.
CONTENTION ACCESS MODE/ RATE, 4	3	TWO TRANSMISSIONS PER 24 SECONDS.
CONTENTION ACCESS MODE/ RATE, 5	4	THREE TRANSMISSIONS PER 24 SECONDS.
CONTENTION ACCESS MODE/ RATE, 6	5	TWO TRANSMISSIONS PER 12 SECONDS.
CONTENTION ACCESS MODE/ RATE, 7	6	THREE TRANSMISSIONS PER 12 SECONDS.
CONTENTION ACCESS MODE/ RATE, 8	7	FOUR TRANSMISSIONS PER 12 SECONDS.
CONTENTION ACCESS MODE/ RATE, 9	8	SIX TRANSMISSIONS PER 12 SECONDS.
CONTENTION ACCESS MODE/ RATE, 10	9	EIGHT TRANSMISSIONS PER 12 SECONDS.

DFI NAME
1772 ACCESS DESCRIPTION

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
CONTENTION ACCESS MODE/ RATE, 11	10	12 TRANSMISSIONS PER 12 SECONDS.
CONTENTION ACCESS MODE/ RATE, 12	11	16 TRANSMISSIONS PER 12 SECONDS.
CONTENTION ACCESS MODE/ RATE, 13	12	20 TRANSMISSIONS PER 12 SECONDS.
CONTENTION ACCESS MODE/ RATE, 14	13	26 TRANSMISSIONS PER 12 SECONDS.
CONTENTION ACCESS MODE/ RATE, 15	14	32 TRANSMISSIONS PER 12 SECONDS.
CONTENTION ACCESS MODE/ RATE, 16	15	64 TRANSMISSIONS PER 12 SECONDS.
DEDICATED ACCESS MODE	16	
UNDEFINED	17 THROUGH 62	
OVERALL NO STATEMENT FOR ACCESS DESCRIPTION	63	
----- FOR DUIS 002-004 -----		
CONTENTION ACCESS MODE/ RATE, 1	0	ONE TRANSMISSION PER 48 SECONDS.
CONTENTION ACCESS MODE/ RATE, 2	1	TWO TRANSMISSIONS PER 48 SECONDS.
CONTENTION ACCESS MODE/ RATE, 3	2	THREE TRANSMISSIONS PER 48 SECONDS.
CONTENTION ACCESS MODE/ RATE, 4	3	TWO TRANSMISSIONS PER 24 SECONDS.
CONTENTION ACCESS MODE/ RATE, 5	4	THREE TRANSMISSIONS PER 24 SECONDS.
CONTENTION ACCESS MODE/ RATE, 6	5	TWO TRANSMISSIONS PER 12 SECONDS.
CONTENTION ACCESS MODE/ RATE, 7	6	THREE TRANSMISSIONS PER 12 SECONDS.
CONTENTION ACCESS MODE/ RATE, 8	7	FOUR TRANSMISSIONS PER 12 SECONDS.
CONTENTION ACCESS MODE/ RATE, 9	8	SIX TRANSMISSIONS PER 12 SECONDS.
CONTENTION ACCESS MODE/ RATE, 10	9	EIGHT TRANSMISSIONS PER 12 SECONDS.
CONTENTION ACCESS MODE/ RATE, 11	10	12 TRANSMISSIONS PER 12 SECONDS.

DFI NAME
1772 ACCESS DESCRIPTION

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
CONTENTION ACCESS MODE/ RATE, 12	11	16 TRANSMISSIONS PER 12 SECONDS.
CONTENTION ACCESS MODE/ RATE, 13	12	20 TRANSMISSIONS PER 12 SECONDS.
CONTENTION ACCESS MODE/ RATE, 14	13	26 TRANSMISSIONS PER 12 SECONDS.
CONTENTION ACCESS MODE/ RATE, 15	14	32 TRANSMISSIONS PER 12 SECONDS.
CONTENTION ACCESS MODE/ RATE, 16	15	64 TRANSMISSIONS PER 12 SECONDS.

DFI NAME DEFINITION
1774 COMMUNITY DESIGNATOR A NUMERICAL VALUE USED TO IDENTIFY A GROUP OF JUS AS ASSOCIATED WITH A PARTICULAR ARMY DIVISION WHEN PARTICIPATING IN THE ARMY CENTRALIZED NET MANAGEMENT.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
001 COMMUNITY DESIGNATOR [4 BIT]	A NUMERICAL VALUE USED TO IDENTIFY A GROUP OF JUS AS ASSOCIATED WITH A PARTICULAR ARMY DIVISION WHEN PARTICIPATING IN THE ARMY CENTRALIZED NET MANAGEMENT.	J1.1C1	J1.4I	J1.5I
002 COMMUNITY DESIGNATOR, INTERCOMMUNITY COMMUNICANT [4 BIT] (CD IC)	A NUMERICAL VALUE USED TO IDENTIFY AN INTERCOMMUNITY COMMUNICANT AS ASSOCIATED WITH A PARTICULAR ARMY DIVISION WHEN PARTICIPATING IN THE ARMY CENTRALIZED NET MANAGEMENT.	J1.4I		

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 AND 002 -----		
NO STATEMENT	0	
COMMUNITY DESIGNATOR	1 THROUGH 15	

DFI	NAME	DEFINITION
1775	RELAY LEVEL	INDICATES THE DISTANCE IN RELAY HOPS BETWEEN TWO UNITS.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY	
001 RELAY LEVEL [4 BIT]	INDICATES THE DISTANCE IN RELAY HOPS BETWEEN TWO UNITS.	J1.1C1	
002 RELAY LEVEL, OWN NET CONTROL STATION [4 BIT] (RLO NCS)	INDICATES THE DISTANCE IN RELAY HOPS FROM THE TERMINAL TO ITS NET CONTROL STATION ON THE NET STATUS NEEDLINE PARTICIPATION GROUP PATH.	J1.4I	J1.5E0
003 RELAY LEVEL, INTERCOMMUNITY COMMUNICANT [4 BIT] (RL ICC)	INDICATES THE DISTANCE IN RELAY HOPS FROM AN INTERCOMMUNITY COMMUNICANT TO ITS NET CONTROL STATION ON THE NET STATUS NEEDLINE PG PATH.	J1.4I	

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001-003 -----		
NO STATEMENT	0	
1 THROUGH 7 RELAY HOPS	1 THROUGH 7	
UNDEFINED	8 THROUGH 15	

DFI	NAME	DEFINITION
1776	REPROMULGATION RELAY STATE	INDICATES WHETHER OR NOT A TERMINAL IS TO RELAY REPROMULGATION RELAY MESSAGES.
DATA STANDARD USAGE: Link 16		STATUS:
DUI NAME	EXPLANATION	APPLICABILITY
001 REPROMULGATION RELAY STATE [1 BIT] (RR STE)	INDICATES WHETHER OR NOT A TERMINAL IS TO RELAY REPROMULGATION RELAY MESSAGES.	J1.5I
DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
DO NOT RELAY REPROMULGA- TION RELAY MESSAGES	0	
RELAY REPROMULGATION RE- LAY MESSAGES	1	A TERMINAL SHOULD RELAY ALL REPROMULGATION RELAY MESSAGES RECEIVED IF THE REPROMULGATION COUNTER IN THE RECEIVED MESSAGE IS GREATER THAN ZERO.

DFI	NAME	DEFINITION
1777	CONNECTIVITY MONITOR, ENABLE	INDICATES WHETHER OR NOT A TERMINAL IS TO MONITOR CONNECTIVITY BY LISTENING TO NET STATUS NEEDLINE PARTICIPATION GROUP TRANSMISSIONS.
DATA STANDARD USAGE: Link 16		STATUS:
DUI NAME	EXPLANATION	APPLICABILITY
001 CONNECTIVITY MONITOR, ENABLE [1 BIT] (CON MON)	INDICATES WHETHER OR NOT A TERMINAL IS TO MONITOR CONNECTIVITY BY LISTENING TO NET STATUS NEEDLINE PG TRANSMISSIONS.	J1.5I
DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
DO NOT MONITOR CONNECTIVITY	0	
MONITOR CONNECTIVITY	1	THE TERMINAL SHOULD MONITOR CONNECTIVITY BY LISTENING TO THE NET STATUS NEEDLINE PG TRANSMISSIONS AND SHOULD ESTABLISH LINK QUALITY VALUES FOR ALL COMMUNICANTS.

DFI	NAME	DEFINITION
1778	REPROMULGATION ORIGINATION CONTROL	INDICATES WHETHER OR NOT A JU MAY ORIGINATE REPROMULGATION MESSAGES.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 REPROMULGATION ORIGINATION CONTROL [1 BIT] (RPR OC)	INDICATES WHETHER OR NOT A JU MAY ORIGINATE REPROMULGATION MESSAGES.	J1.5I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
DO NOT ORIGINATE REPROM- ULGATION MESSAGES	0	
REPROMULGATION MESSAGES MAY BE ORIGINATED	1	

DFI	NAME	DEFINITION
1779	INITIAL ENTRY INDICATOR	INDICATES WHETHER OR NOT A TERMINAL SHALL TRANSMIT J0.0 MESSAGES.

DATA STANDARD USAGE: Link 16	STATUS:
------------------------------	---------

DUI NAME	EXPLANATION	APPLICABILITY
001 INITIAL ENTRY INDICATOR [1 BIT] (IE IND)	INDICATES WHETHER OR NOT A TERMINAL SHALL TRANSMIT J0.0 MESSAGES.	J1.5I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
TRANSMIT J0.0 MESSAGES	0	
DO NOT TRANSMIT J0.0 MESSAGES	1	

DFI NAME DEFINITION
1780 COMMUNICANT STATUS UPDATE INDICATES THE NUMBER OF CONNECTIVITY QUALITIES OF ITS DIRECT
INDICATOR COMMUNICANTS THAT A TERMINAL REPORTS IN SUCCESSION.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 COMMUNICANT STATUS UPDATE INDICATOR [2 BIT] (CS UI)	INDICATES THE NUMBER OF CONNECTIVITY QUALITIES OF ITS DIRECT COMMUNICANTS THAT A TERMINAL REPORTS IN SUCCESSION.	J1.5E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
64 COMMUNICANTS	1	INDICATES THAT THE TERMINAL REPORTS UP TO 64 CONNECTIVITY QUALITIES OF DIRECT COMMUNICANTS IN SUCCESSION.
128 COMMUNICANTS	2	INDICATES THAT THE TERMINAL REPORTS UP TO 128 CONNECTIVITY QUALITIES OF ITS DIRECT COMMUNICANTS IN SUCCESSION.
UNDEFINED	3	

B-823

MIL-STD-6016B
APPENDIX B

DFI NAME DEFINITION
1781 INDEX NUMBER A NUMBER ASSIGNED TO IDENTIFY AN ENTITY.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 INDEX NUMBER, SET [8 BIT] (INSET)	SPECIFIES THE INDEX NUMBER OF THE SET OF INITIALIZATION PARAMETERS TO WHICH THE ACTION CODE APPLIES.	J0.3C2
002 INDEX NUMBER, NEW SET [8 BIT] (NEWSET)	SPECIFIES THE NEW INDEX NUMBER IN CASE OF SET CHANGE ORDER.	J0.3C2

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001-002 -----		
NO STATEMENT	0	
NUMERIC	1 THROUGH 255	

DFI	NAME	DEFINITION
1782	PARTICIPANT INDEX NUMBER	A NUMBER ASSIGNED TO A JU BY THE NETWORK CONTROL UNIT FOR THE PURPOSE OF ORDERING COMMUNICANTS.

DATA STANDARD USAGE: Link 16	STATUS:
------------------------------	---------

DUI NAME	EXPLANATION	APPLICABILITY
001 PARTICIPANT INDEX NUMBER [8 BIT]	A NUMBER ASSIGNED TO A JU BY THE NETWORK CONTROL UNIT FOR THE PURPOSE OF ORDERING COMMUNICANTS.	J1.5E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
PARTICIPANT INDEX NUMBER	1 THROUGH 255	

DFI	NAME	DEFINITION
1783	ALLOCATED PG INDEX NUMBER	INDICATES THE PG INDEX ON WHICH THE ROUTE IS TO BE ESTABLISHED.

DATA STANDARD USAGE: Link 16	STATUS:
------------------------------	---------

DUI NAME	EXPLANATION	APPLICABILITY
001 ALLOCATED PG INDEX NUMBER [9 BIT]	INDICATES THE PG INDEX ON WHICH THE REPROG ROUTE IS TO BE ESTABLISHED.	J1.2I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
NUMERIC	1 THROUGH 511	

DFI	NAME	DEFINITION
1784	ALLOCATED ROUTE NUMBER	INDICATES THE NUMBER ON WHICH THE ROUTE IS TO BE ESTABLISHED.
DATA STANDARD USAGE: Link 16		STATUS:
DUI NAME	EXPLANATION	APPLICABILITY
001 ROUTE NUMBER, RELAY [4 BIT] (RN REL)	INDICATES THE NUMBER ON WHICH THE REPROM ROUTE IS TO BE ESTABLISHED.	J1.2I
DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
NUMERIC	1 THROUGH 15	

DFI NAME DEFINITION
1786 NET CONTROL STATION STATUS

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 OWN NET CONTROL STATION STATUS [2 BIT] (NCS STS)	INDICATES THE OPERATIONAL STATUS OF A TERMINAL'S NET CONTROL STATION.	J1.4I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
MESSAGES RECEIVED	1	THE TERMINAL HAS RECEIVED MESSAGES FROM ITS CONTROLLING NET CONTROL STATION WITHIN THE LAST TWO (1-5, 1) MINUTES.
NO MESSAGES RECEIVED	2	THE TERMINAL HAS NOT RECEIVED MESSAGES FROM ITS CONTROLLING NET CONTROL STATION WITHIN THE LAST TWO (1-5, 1) MINUTES.
UNDEFINED	3	

B-828

MIL-STD-6016B
APPENDIX B

DFI NAME DEFINITION
1787 RESPONSE TIME THE RESPONSE TIME IN SECONDS REQUIRED FOR MESSAGES TRANSMITTED
IN THE REFERENCED PARTICIPATION GROUP.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 RESPONSE TIME [9 BIT]	THE RESPONSE TIME IN SECONDS RE- QUIRED FOR MESSAGES TRANS- MITTED IN THE REFERENCED PARTICIPATION GROUP.	J1.6E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
1 THROUGH 511 SECONDS	1 THROUGH 511	IN ONE SECOND INCREMENTS.

DFI	NAME	DEFINITION
1788	ASSIGN/DEASSIGN INDICATOR	INDICATES THE TYPE OF NEEDLINE PARTICIPATION GROUP ASSIGNMENT BEING MADE.

DATA STANDARD USAGE: Link 16	STATUS:
------------------------------	---------

DUI NAME	EXPLANATION	APPLICABILITY
001 ASSIGN/DEASSIGN INDICATOR [2 BIT] (A/D IND)	INDICATES THE TYPE OF NEEDLINE PARTICIPATION GROUP ASSIGNMENT BEING MADE.	J1.6E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NEW ASSIGNMENT	0	
AN ADDITION TO A PREVIOUS ASSIGNMENT	1	
A SUBTRACTION FROM A PREVIOUS ASSIGNMENT	2	
A COMPLETE DELETION OF A PREVIOUS ASSIGNMENT(S)	3	

B-831

STATUS:

APPENDIX B

MIL-STD-6016B

DFI	NAME	DEFINITION
1790	NEEDLINE PG STATUS AMPLIFY	INDICATES THE OPERATIONAL STATUS OF THE ASSOCIATED NET STATUS NEEDLINE PARTICIPATION GROUP.

DATA STANDARD USAGE: Link 16	STATUS:
------------------------------	---------

DUI NAME	EXPLANATION	APPLICABILITY
001 NEEDLINE PARTICIPATION GROUP STATUS AMPLIFY, 1 [3 BIT] (NPG SA1)	INDICATES THE OPERATIONAL STATUS OF THE ASSOCIATED NET STATUS NEEDLINE PG.	J0.6C2
002 NEEDLINE PARTICIPATION GROUP STATUS AMPLIFY, 2 [3 BIT] (NPG SA2)	INDICATES THE OPERATIONAL STATUS OF THE ASSOCIATED NET STATUS NEEDLINE PG.	J0.6C2

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001 AND 002 -----		
NO STATEMENT	0	
NO FAILURE	1	INDICATES NO FAILURE OF PATHS HAS OCCURRED ON THE ASSOCIATED NET STATUS NEEDLINE PG.
DIRECTED ZERO PATH FAILURE	2	INDICATES A FAILURE OF A DIRECTED ZERO PATH HAS OCCURRED ON THE ASSOCIATED NET STATUS NEEDLINE PG.
DIRECTED ONE PATH FAILURE	3	INDICATES A FAILURE OF A DIRECTED ONE PATH HAS OCCURRED ON THE ASSOCIATED NET STATUS NEEDLINE PG.
NONDIRECTED PATH FAILURE	4	INDICATES A FAILURE OF A NONDIRECTED PATH HAS OCCURRED ON THE ASSOCIATED NET STATUS NEEDLINE PG.
UNDEFINED	5 THROUGH 7	

DFI NAME DEFINITION
1791 TEST DURATION COUNT INDICATES THE FINAL VALUE REACHED IN THE COUNT DURING
SEQUENTIAL HYPOTHESIS TEST AT THE TIME THE FAILURE DECISION IS
MADE.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 TEST DURATION COUNT, 1 [8 BIT]	INDICATES THE FINAL VALUE REACHED IN THE COUNT DURING SEQUENTIAL HYPOTHESIS TEST AT THE TIME THE FAILURE DECISION IS MADE.	J0.6C2
002 TEST DURATION COUNT, 2 [8 BIT]	INDICATES THE FINAL VALUE REACHED IN THE COUNT DURING SEQUENTIAL HYPOTHESIS TEST AT THE TIME THE FAILURE DECISION IS MADE.	J0.6C2

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001 AND 002 -----		
NO STATEMENT	0	
TEST COUNT	1 THROUGH 255	IN ONE NUMBER INCREMENTS.

B-833

MIL-STD-6016B
APPENDIX B

DFI

NAME

1792

ASSIGN/DEASSIGN UNIT
DESIGNATOR

DEFINITION

INDICATES WHETHER THE UNIT DESIGNATOR IN THE MESSAGE SHOULD BE
ASSIGNED OR DEASSIGNED TO THE REFERENCE TRACK NUMBER IN THE
MESSAGE.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 ASSIGN/DEASSIGN UNIT DESIGNATOR [2 BIT] (A/D UD)	INDICATES WHETHER THE UNIT DESIGNATOR IN THE MESSAGE SHOULD BE ASSIGNED OR DEASSIGNED TO THE REFERENCE TN IN THE MESSAGE.	J8.0I

DATA ITEM	BIT CODE	EXPLANATION
-----------	----------	-------------

----- FOR DUI 001 -----

NO STATEMENT	0	
ASSIGN	1	THE UNIT DESIGNATOR IN THE MESSAGE SHOULD BE ASSIGNED TO THE REFERENCE TN IN THE MESSAGE.
DEASSIGN	2	THE UNIT DESIGNATOR IN THE MESSAGE SHOULD BE DEASSIGNED TO THE REFERENCE TN IN THE MESSAGE.
UNDEFINED	3	

DFI NAME DEFINITION
1793 UNIT DESIGNATOR

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 UNIT DESIGNATOR [48 BIT]		J8.0E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
STANDARD ASCII CODE		

DFI NAME DEFINITION
1797 PLATFORM THE PLATFORM ALONG WITH PLATFORM ACTIVITY FURTHER DEFINE THE
IDENTITY OF A TRACK.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
001 AIR PLATFORM [6 BIT]	THE AIR PLATFORM FIELD ALONG WITH THE AIR PLATFORM ACTIVITY FIELD FURTHER DEFINES THE IDENTITY OF AN AIR TRACK.	J2.2C1 J6.0I J14.2C5	J3.2C1 J7.0I	J3.7C4 J14.0C5
002 SURFACE (MARITIME) PLATFORM [6 BIT]	THE SURFACE (MARITIME) PLATFORM FIELD ALONG WITH THE SURFACE (MAR- ITIME) PLATFORM ACTIVITY FIELD FURTHER DEFINES THE IDENTITY OF A SURFACE (MARITIME) TRACK.	J2.3C1 J6.0I J14.2C5	J3.3C1 J7.0I	J3.7C4 J14.0C5
003 SUBSURFACE (MARITIME) PLATFORM [6 BIT]	THE SUBSURFACE (MARITIME) PLATFORM FIELD ALONG WITH THE SUBSURFACE (MARITIME) PLATFORM ACTIVITY FIELD FURTHER DEFINES THE IDENTITY OF A SUBSURFACE (MARITIME) TRACK.	J2.4C1 J5.4I J14.0C5	J3.4I J6.0I J14.2C5	J3.7C4 J7.0I
004 LAND (GROUND) PLATFORM [6 BIT]	THE LAND (GROUND) PLATFORM FIELD ALONG WITH THE LAND (GROUND) PLATFORM ACTIVITY FIELD FURTHER DEFINES THE IDENTITY OF A LAND(GROUND) POINT OR TRACK.	J2.5C1 J3.7C4 J14.0C5	J2.6C1 J6.0I J14.2C5	J3.5C1 J7.0I
005 SPACE PLATFORM [6 BIT]	THE SPACE PLATFORM FIELD ALONG WITH THE SPACE PLATFORM ACTIVITY FIELD FURTHER DEFINES THE IDENTITY OF A SPACE TRACK.	J3.6I J7.0I	J3.7C4 J14.0C5	J6.0I J14.2C5

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
FIGHTER	1	
FIGHTER BOMBER	2	
ATTACK	3	
BOMBER	4	
RECONNAISSANCE	5	

DFI NAME
1797 PLATFORM

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
TANKER	6	
TANKER (BOOM ONLY)	7	
TANKER (DROGUE ONLY)	8	
INTERCEPTOR	9	
TRANSPORT	10	
AIRBORNE COMMAND POST (ACP)	11	
MISSILE CARRIER	12	
MISSILE	13	
ELECTRONIC WARFARE (EW)	14	
ANTISUBMARINE WARFARE (ASW)	15	
AIRBORNE EARLY WARNING AND CONTROL (AEW)	16	
MARITIME PATROL AIRCRAFT (MPA)	17	
SEARCH AND RESCUE (SAR)	18	
DRONE	19	
REMOTELY PILOTED VEHICLE (RPV)	20	
FIXED WING GUNSHIP	21	
CIVIL, AIRLINER	22	
CIVIL, GENERAL	23	
LIGHTER THAN AIR (LTA)	24	
GLIDER	25	
DECOY	26	
HELICOPTER (HELO)	27	
ATTACK HELICOPTER	28	
HELICOPTER GUNSHIP	29	
ANTISUBMARINE WARFARE HELICOPTER (ASW HELO)	30	
MINE WARFARE HELICOPTER	31	
TRANSPORT HELICOPTER	32	
TACTICAL SUPPORT	33	
PATROL	34	
MISCELLANEOUS FIXED WING	35	
MISSILE CONTROL UNIT	36	
SURFACE-TO-AIR MISSILE (SAM)	37	
AIR-TO-SURFACE MISSILE (ASM)	38	

B-837

DFI NAME
1797 PLATFORM

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
SURFACE-TO-SURFACE	39	
MISSILE (SSM)		
LOGISTIC	40	
AIR-TO-AIR MISSILE (AAM)	41	
SUBSURFACE-TO-SURFACE	42	
MISSILE		
SURFACE-TO-SUBSURFACE	43	
MISSILE		
CRUISE MISSILE	44	
BALLISTIC MISSILE	45	
AIRBORNE LAND	46	
SURVEILLANCE		
AIRBORNE LASER	47	
UNDEFINED	48 THROUGH 62	
RESET TO NO STATEMENT	63	
----- FOR DUI 002 -----		
NO STATEMENT	0	
AIRCRAFT CARRIER (CV)	1	
BATTLESHIP	2	
CRUISER	3	
DESTROYER	4	
FRIGATE	5	
FAST PATROL BOAT	6	
AMPHIBIOUS	7	
LHA/LHD	8	
AMPHIBIOUS ASSAULT	9	
COMMAND SHIP (LCC)		
LANDING CRAFT (LC)	10	
TROOP SHIP	11	
TANKER/OILER	12	
AUXILIARY SHIP	13	
MINE WARFARE SHIP	14	
MINE COUNTERMEASURES	15	
MARITIME VESSEL (MCMV)		
HOSPITAL SHIP	16	
SURFACED SUBMARINE	17	
HYDROFOIL	18	
AIR CUSHION VEHICLE	19	
INTELLIGENCE COLLECTOR	20	

B-838

APPENDIX B

MIL-STD-6016B

DFI NAME
1797 PLATFORM

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
SURVEY VESSEL	21	
NON-MILITARY	22	
LANDING PLATFORM	23	
LANDING SHIP	24	
COMMAND	25	
OCEAN RESEARCH	26	
PATROL	27	
SUPPORT	28	
FISHING VESSEL	29	
MERCHANT VESSEL	30	
PATROL CRAFT ESCORT	31	
AMPHIBIOUS GENERAL ASSAULT	32	
MISSILE CONTROL UNIT	33	
DECOY	34	
UNDEFINED	35 THROUGH 62	
RESET TO NO STATEMENT	63	
----- FOR DUI 003 -----		
NO STATEMENT	0	
SUBMARINE PROPULSION	1	
UNKNOWN		
DIESEL ELECTRIC	2	
SUBMARINE GENERAL		
DIESEL ELECTRIC ATTACK	3	
SUBMARINE		
DIESEL ELECTRIC MISSILE	4	
SUBMARINE		
DIESEL ELECTRIC	5	
BALLISTIC MISSILE		
SUBMARINE		
TYPE 1 DIESEL	6	
TYPE 2 DIESEL	7	
TYPE 3 DIESEL	8	
NUCLEAR SUBMARINE	9	
GENERAL		
NUCLEAR ATTACK SUBMARINE	10	
NUCLEAR MISSILE	11	
SUBMARINE		

B-839

DFI NAME
1797 PLATFORM

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
NUCLEAR BALLISTIC	12	
MISSILE SUBMARINE		
TYPE I NUCLEAR	13	
TYPE II NUCLEAR	14	
TYPE III NUCLEAR	15	
TYPE IV NUCLEAR	16	
TYPE V NUCLEAR	17	
NON-SUBMARINE	18	
SURFACE VESSEL	19	
TORPEDO	20	
MINE	21	
DECOY	22	
WRECK	23	
SEABED PIPELINE	24	
FISH/MARINE LIFE	25	
SWIMMER/FROGMAN	26	
KNUCKLE/WAKE	27	
ATTACK SUBMARINE	28	
CRUISE MISSILE LAUNCHER	29	
PINNACLE/SEAMOUNTAIN	30	
NON-MILITARY	31	
SUBMERSIBLE		
UNDEFINED	32	
TYPE VI NUCLEAR	33	
TYPE VII NUCLEAR	34	
CONVENTIONAL (COMMAND	35	
AND CONTROL)		
CONVENTIONAL (AUXILIARY)	36	
NUCLEAR (COMMAND AND	37	
CONTROL)		
UNDEFINED	38 THROUGH 48	
MISSILE CONTROL UNIT	49	
UNDEFINED	50 THROUGH 62	
RESET TO NO STATEMENT	63	
----- FOR DUI 004 -----		
NO STATEMENT	0	
TROOP CONCENTRATION/UNIT	1	
HEADQUARTER COMPLEX	2	

B - 840

MIL-STD-6016B
APPENDIX B

DFI NAME
1797 PLATFORM

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
COMMAND/CONTROL/COMMAND AND CONTROL CENTER	3	
ASSEMBLY AREA	4	
INSTALLATION/FACILITY, MILITARY	5	
INSTALLATION/FACILITY, CIVILIAN	6	
AIRFIELD/AIRBASE	7	
PORT/HARBOR FACILITY	8	
STORAGE SITE	9	
TACTICAL POSITION	10	
FORTIFICATION	11	
INTERSECTION	12	
CONVOY	13	
COMBAT VEHICLE	14	
COMBAT SUPPORT VEHICLE	15	
VEHICLE, OTHER	16	
TANK	17	
TRAIN	18	
REMOTELY PILOTED VEHICLE	19	
MORTAR	20	
FIELD ARTILLERY	21	
AIR DEFENSE ARTILLERY	22	
ROCKET LAUNCHER	23	
MISSILE LAUNCHER	24	
SPECIAL WEAPON	25	
BRIDGE	26	
BUILDING/STRUCTURE	27	
POWER FACILITY	28	
RAIL FACILITY	29	
TERRAIN	30	
NAVAID SITE	31	
COMMUNICATION SITE	32	
RADAR SITE	33	
ANTENNA/EMITTER	34	
BUFFER CENTER	35	
ELECTRONIC WARFARE SITE	36	
SURVEILLANCE SITE	37	
BRIDGING EQUIPMENT	38	
MINE WARFARE EQUIPMENT	39	

B-841

DFI NAME
1797 PLATFORM

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
SURFACE-TO-AIR MISSILE (SAM) SITE	40	
MARITIME HEADQUARTERS	41	
AIR SUPPORT RADAR TEAM (ASRT)	42	
DIRECT AIR SUPPORT CENTER (DASC)	43	
FORWARD AIR CONTROL PARTY (FACP)	44	
BATTALION OPERATIONS CENTER (BOC)	45	
TACTICAL DATA SYSTEM (TDS)	46	
DECOY	47	
TRACKED VEHICLE	48	
THEATER HIGH ALTITUDE AREA DEFENSE (THAAD)	49	
JOINT TACTICAL GROUND STATION (JTAGS)	50	
ARMOR	51	
CAVALRY	52	
ENGINEER	53	
AIRBORNE/SPECIAL OPERATIONS	54	
AVIATION	55	
AIR DEFENSE SITE	56	
BALLISTIC MISSILE DEFENSE SITE	57	
UNDEFINED	58 THROUGH 62	
RESET TO NO STATEMENT	63	
----- FOR DUI 005 -----		
NO STATEMENT	0	
SATELLITE	1	
BASE	2	
WEAPON	3	
TRANSPORT	4	
PATROL	5	
SUPPORT	6	
DEBRIS	7	

B-842

MIL-STD-6016B
APPENDIX B

DFI NAME
1797 PLATFORM

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
DECOY	8	
UNDEFINED	9 THROUGH 30	
SPACE GENERAL	31	
UNDEFINED	32 THROUGH 61	
BALLISTIC MISSILE	62	
GENERAL UNKNOWN		
RESET TO NO STATEMENT	63	

DFI NAME DEFINITION
 1798 PLATFORM ACTIVITY THE PLATFORM ACTIVITY ALONG WITH PLATFORM FURTHER DEFINE THE IDENTITY OF A TRACK.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
001 AIR PLATFORM ACTIVITY [7 BIT]	THE AIR PLATFORM ACTIVITY FIELD ALONG WITH THE AIR PLATFORM FIELD FURTHER DEFINES THE IDENTITY OF AN AIR TRACK.	J2.2C1 J7.0I	J3.2C1 J14.0C5	J6.0I J14.2C5
002 SURFACE (MARITIME) PLATFORM ACTIVITY [7 BIT]	THE SURFACE (MARITIME) PLATFORM ACTIVITY FIELD ALONG WITH THE SURFACE (MARITIME) PLATFORM FIELD FURTHER DEFINES THE IDENTITY OF A SURFACE (MARITIME) TRACK.	J2.3C1 J7.0I	J3.3C1 J14.0C5	J6.0I J14.2C5
003 SUBSURFACE (MARITIME) PLATFORM ACTIVITY [7 BIT]	THE SUBSURFACE (MARITIME) PLATFORM ACTIVITY FIELD ALONG WITH THE SUBSURFACE (MARITIME) PLATFORM FIELD FURTHER DEFINES THE IDENTITY OF A SUBSURFACE (MARITIME) TRACK.	J2.4C1 J6.0I J14.2C5	J3.4I J7.0I	J5.4C2 J14.0C5
004 LAND (GROUND) PLATFORM ACTIVITY [7 BIT]	THE LAND (GROUND) PLATFORM ACTIVITY FIELD ALONG WITH THE LAND (GROUND) PLATFORM FIELD FURTHER DEFINES THE IDENTITY OF A LAND (GROUND) POINT OR TRACK.	J2.5C1 J6.0I J14.2C5	J2.6C1 J7.0I	J3.5C1 J14.0C5
005 SPACE PLATFORM ACTIVITY [7 BIT]	THE SPACE PLATFORM ACTIVITY FIELD ALONG WITH THE SPACE PLATFORM FIELD FURTHER DEFINES THE IDENTITY OF A SPACE TRACK.	J3.6I J14.0C5	J6.0I J14.2C5	J7.0I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
RECONNAISSANCE	1	
OVER THE HORIZON	2	
TARGETING (OTHT)		
TRAINING	3	
LOGISTICS SUPPORT	4	

DFI NAME
1798 PLATFORM ACTIVITY

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
ANTISURFACE WARFARE	5	
ELECTRONIC WARFARE (EW)	6	
SURVEILLANCE	7	
SEARCH AND RESCUE (SAR)	8	
ESCORTING	9	
MINELAYING	10	
TRANSITING	11	
SPECIAL WEAPONS ATTACK	12	
INTRUDING	13	
ELECTRONIC WARFARE SUPPORT (ES)	14	
COMMUNICATIONS RELAY	15	
PATROL (OCEAN SURVEILLANCE)	16	
AIRLIFT (TRANSPORT)	17	
ANTISUBMARINE WARFARE (ASW)	18	
SHADOWING/INTERVENING	19	
TOWING	20	
AIR ASSAULT	21	
INTERCEPTION	22	
ELECTRONIC ATTACK (EA)	23	
POLICING	24	
CONVENTIONAL ATTACK	25	
MEDICAL EVACUATION (MEDEVAC)	26	
MINE COUNTERMEASURES	27	
SEARCH	28	
REFUELING/TANKING	29	
INTERDICTION	30	
COMBAT AIR PATROL (CAP)	31	
FORWARD AIR CONTROLLER (FAC)	32	
VERY IMPORTANT PERSON (VIP) FLIGHT	33	
NONCOMBATANT OPERATIONS	34	
CLOSE AIR SUPPORT (CAS)	35	
AIRBORNE EARLY WARNING (AEW)	36	
GROUND ATTACK TACTICS (GAT)	37	

B - 845

MIL-STD-6016B
APPENDIX B

DFI NAME
1798 PLATFORM ACTIVITY

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
AIRBORNE COMMAND POST (ACP)	38	
RESCUE COMBAT AIR PATROL (RESCAP)	39	
SURFACE COMBAT AIR PATROL (SUCAP)	40	
TANKING	41	
SPOTTING	42	
STRIKE WARFARE	43	
SPECIAL	44	
HIJACK	45	
JAMMER	46	
TROOPLIFT	47	
XRAY	48	
ANTI-AIR WARFARE (AAW)	49	
COMMAND AND CONTROL	50	
COUNTER-AIR WARFARE	51	
RETURN TO BASE (RTB)	52	
MINE WARFARE	53	
CHAFF LAYING	54	
VIDEO DATA LINKING (TARGETING)	55	A METHOD OF PROVIDING REMOTE TARGETING DATA TO A FIRING PLATFORM/WEAPON.
DIPPING	56	
RESCUE HELO	57	
ORBITING	58	
UNDER RECALL	59	
ENGAGING	60	
ENGAGING (PRIORITY KILL)	61	
INVESTIGATING	62	
CLEARED TO DROP	63	
INTERVENING	64	
DIVERTING	65	
AIR-TO-GROUND	66	
AIR-TO-AIR	67	
PRECISION BOMBING	68	
LASER DESIGNATION	69	
BEACON BOMBING	70	
SHADOWING	71	
COVERING	72	
VISUAL IDENTIFICATION	73	

B-846

APPENDIX B

MIL-STD-6016B

DFI NAME
1798 PLATFORM ACTIVITY

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
HIGH ENERGY LASING	74	
UNDEFINED	75 THROUGH 114	
AIR ACTIVITY 1 THROUGH 12	115 THROUGH 126	A SPECIFIC AIR MISSION DEFINED BY THE JOINT OPERATIONAL COMMANDER.
RESET TO NO STATEMENT	127	
----- FOR DUI 002 -----		
NO STATEMENT	0	
AIR WARFARE SUPPORT	1	
OVER THE HORIZON	2	
TARGETING (OTHT)		
TRAINING	3	
LOGISTICS SUPPORT	4	
ANTISURFACE WARFARE	5	
ELECTRONIC WARFARE (EW)	6	
FISHERY PROTECTION	7	
SEARCH AND RESCUE (SAR)	8	
ESCORTING	9	
MINELAYING	10	
TRANSITING	11	
NAVAL GUNFIRE SUPPORT	12	
INTRUDING	13	
AMPHIBIOUS WARFARE	14	
INTELLIGENCE COLLECTING	15	
PATROL	16	
TRANSPORT	17	
ANTISUBMARINE WARFARE (ASW)	18	
SHADOWING/INTERVENING	19	
TOWING	20	
SPECIAL WARFARE	21	
STRIKE WARFARE	22	
ANTIAIR WARFARE	23	
FISHING	24	
PICKETING	25	
MINE COUNTERMEASURES	26	
MINE WARFARE	27	
MARKING	28	
NONCOMBATANT OPERATIONS	29	
UNDERWAY REPLENISHMENT	30	

B-847

DFI NAME
1798 PLATFORM ACTIVITY

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
SURVEYING	31	
ELECTRONIC WARFARE	32	
SUPPORT (ES)		
ELECTRONIC ATTACK (EA)	33	
FLIGHT OPERATIONS	34	
VIDEO DATA LINKING (TARGETING)	35	A METHOD OF PROVIDING REMOTE TARGETING DATA TO A FIRING PLATFORM/WEAPON.
PLANE GUARD	36	
RESCUE SHIP/LIFEGUARD	37	
UNDEFINED	38 THROUGH 49	
RETURN TO BASE (RTB)	50	
UNDEFINED	51 THROUGH 114	
SURFACE (MARITIME) ACTIVITY 1 THROUGH 12	115 THROUGH 126	A SPECIFIC SURFACE (MARITIME) MISSION DEFINED BY THE JOINT OPERATIONAL COMMANDER.
RESET TO NO STATEMENT	127	
----- FOR DUI 003 -----		
NO STATEMENT	0	
RECONNAISSANCE	1	
OVER THE HORIZON	2	
TARGETING (OTHT)		
TRAINING	3	
DIVING	4	
ANTISURFACE WARFARE	5	
ELECTRONIC WARFARE (EW)	6	
SURVEILLANCE	7	
SEARCH AND RESCUE (SAR)	8	
ESCORTING	9	
MINELAYING	10	
TRANSITING	11	
SPECIAL WEAPONS ATTACK	12	
SURFACING	13	
AMPHIBIOUS WARFARE	14	
INTELLIGENCE COLLECTING	15	
PATROL	16	
TRANSPORT	17	
ANTISUBMARINE WARFARE (ASW)	18	

B-848

APPENDIX B

MIL-STD-6016B

APPENDIX B

DFI NAME
1798 PLATFORM ACTIVITY

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
SHADOWING/INTERVENING	19	
BOTTOMING	20	
SPECIAL WARFARE	21	
STRIKE WARFARE	22	
CLANDESTINE OPERATIONS	23	
SNORKELING	24	
CONVENTIONAL ATTACK	25	
MINE COUNTERMEASURES	26	
MINE WARFARE	27	
MARKING	28	
NONCOMBATANT OPERATIONS	29	
DIRECT SUPPORT	30	
VIDEO DATA LINKING (TARGETING)	31	A METHOD OF PROVIDING REMOTE TARGETING DATA TO A FIRING PLATFORM/WEAPON.
UNDEFINED	32 THROUGH 49	
RETURN TO BASE (RTB)	50	
UNDEFINED	51 THROUGH 114	
SUBSURFACE (MARITIME) ACTIVITY 1 THROUGH 12	115 THROUGH 126	A SPECIFIC SUBSURFACE (MARITIME) MISSION DEFINED BY THE JOINT OPERATIONAL COMMANDER.
RESET TO NO STATEMENT	127	
----- FOR DUI 004 -----		
NO STATEMENT	0	
HOLDING	1	
DELAYING	2	
MOVING	3	
DETECTING	4	
ACQUIRING	5	
ENGAGING	6	
ADVANCING	7	
ANTI-AIR ATTACK	8	
AMPHIBIOUS ASSAULT	9	
FIRING/LAUNCHING	10	
CONVENTIONAL ATTACK/ ASSAULT	11	
SPECIAL WEAPONS ATTACK	12	
DEMOLITION	13	

B-849

DFI NAME
1798 PLATFORM ACTIVITY

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
OVER THE HORIZON	14	
TARGETING		
TRANSITING	15	
RETURN TO BASE	16	
DEPLOYING	17	
EMISSION CONTROL (EMCON)	18	
RIVER CROSSING	19	
LOADING	20	
TOWING	21	
BUILDING FORTIFICATION/ BARRIER	22	
CLEARING BARRIER	23	
RECOVERING EQUIPMENT	24	
MINE SWEEPING	25	
MINE LAYING	26	
JAMMING	27	
RECONNAISSANCE/ PATROLLING	28	
SEARCH AND RESCUE (SAR)	29	
TRAINING	30	
MEDICAL EVACUATION (MEDEVAC)	31	
ESCORTING	32	
TRANSPORTING	33	
SCREENING	34	
SUPPORTING	35	
REPAIRING	36	
REFUELING	37	
NEUTRALIZING	38	
TARGETING	39	
BYPASSING	40	
CLOSING	41	
CONCENTRATING	42	
DEFENDING	43	
DISENGAGING	44	
INFILTRATING	45	
INTERDICTING	46	
LANDING	47	
OCCUPYING	48	
DISPERSING	49	
SUPPLY/RESUPPLY	50	

B-850

DFI NAME
1798 PLATFORM ACTIVITY

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
RETROGRADE/WITHDRAWING	51	
TRANSMITTING	52	
ELECTRONIC WARFARE	53	
SUPPORT (ES)		
ELECTRONIC ATTACK (EA)	54	
MOVING EQUIPMENT	55	
POWER UP AND MANNED, NOT	56	
EMITTING		
PREPARATION FOR LAUNCH	57	
SITE SHUT DOWN TO	58	
UNPOWERED SATUS		
UNDEFINED	59 THROUGH 114	
LAND (GROUND) ACTIVITY	115 THROUGH 126	A SPECIFIC LAND (GROUND) MISSION
1 THROUGH 12		DEFINED BY THE JOINT OPERATIONAL
		COMMANDER.
RESET TO NO STATEMENT	127	
----- FOR DUI 005 -----		
NO STATEMENT	0	
RECONNAISSANCE	1	
ANTISPACE WARFARE	2	
TELEVISION	3	
LOGISTICS	4	
ANTISURFACE WARFARE	5	
ELECTRONIC WARFARE (EW)	6	
SURVEILLANCE	7	
DATA LINK	8	
ELECTRONIC WARFARE	9	
SUPPORT (ES)		
ELECTRONIC ATTACK (EA)	10	
COMMUNICATIONS	11	
RETURN TO BASE (RTB)	12	
UNDEFINED	13 THROUGH 50	
SPACE ACTIVITY 1 THROUGH	51 THROUGH 62	A SPECIFIC SPACE MISSION DEFINED BY
12		THE JOINT OPERATIONAL COMMANDER.
UNDEFINED	63 THROUGH 114	
BALLISTIC MISSILE	115 THROUGH 126	
ACTIVITY 1 THROUGH 12		
RESET TO NO STATEMENT	127	

DFI NAME
1802 PLATFORM TYPE

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
----------	-------------	---------------

001 PLATFORM TYPE [6 BIT]	THE PLATFORM/SITE TYPE WHICH IS TO MODIFY THEIR PARTICIPATION IN THE EMISSION CONTROL PLAN ORDERED OR IN EFFECT.	J14.2C6
------------------------------	---	---------

DATA ITEM	BIT CODE	EXPLANATION
-----------	----------	-------------

----- FOR DUI 001 -----

NO STATEMENT	0
ALL SURFACE	1
CV	2
DD, DDG	3
CG	4
FF, FFG, FFL	5
PATROL CRAFT	6
MINE WARFARE	7
LPA, LHA	8
OTHER AMPHIBIOUS	9
SUPPORT UNITS	10
OILER/TANKER	11
OTHER SURFACE UNITS	12
ALL AIRCRAFT	13
FIGHTER/INTERCEPTOR	14
FIGHTER/BOMBER ATTACK	15
BOMBER	16
HELICOPTER	17
ATTACK HELICOPTER	18
DRONE/RPV/UAV	19
SUPPORT AIRCRAFT	20
PATROL AIRCRAFT	21
AEW AIRCRAFT	22
CAP AIRCRAFT	23
SAR AIRCRAFT	24
OTHER AIRCRAFT	25
ALL SUBSURFACE	26
ATTACK SUBSURFACE	27
FBM SUBSURFACE	28
ALL LAND	29

DFI NAME
1802 PLATFORM TYPE

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
SAM SITE	30	
AAA SITE	31	
GCI SITE	32	
EA SITE	33	
AIR BASE	34	
COMMAND CENTER	35	
FIELD ARTILLERY SITE	36	
ES SITE	37	
ADA SITE	38	
COMMUNICATION CENTERS	39	
BATTLEFIELD SURVEILLANCE SITE	40	
CM/CB SITE	41	
OTHER LAND	42	
UNDEFINED	43 THROUGH 63	

DFI NAME DEFINITION
1803 EW COORDINATION EW ACTIONS TO BE TAKEN OR REPORTS RESULTING FROM PREVIOUS EW ACTION.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 ELECTRONIC WARFARE ACTION VALUE [6 BIT]	THIS FIELD DESCRIBES AN EW ACTION TO BE TAKEN OR DESCRIBES REPORTS THAT ARE THE RESULT OF PREVIOUS EW ACTIONS.	J14.2I
003 REFERENCE ELECTRONIC WARFARE ACTION VALUE [6 BIT]	THIS FIELD SPECIFIES THE EW ACTION VALUE OF A PREVIOUS MESSAGE REFERENCED IN THIS MESSAGE.	J14.2E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
REQUEST PERIODIC REPORT	0	PERIODICALLY REPORT THE TRACK DESIGNATED BY REFERENCE TN UNTIL THE REQUEST IS CANCELLED, THE CONTACT IS LOST, A "WATCH" REQUEST OR CEASE REPORT IS RECEIVED.
REQUEST AUTOMATIC EVALUATION	1	REQUEST EVALUATION OF EMITTER NUMBER, EMITTER FUNCTION MODE NUMBER, AND EMITTER CONFIDENCE USING DESIGNATED PARAMETRIC DATA.
REQUEST MANUAL EVALUATION	2	PERFORM AN EVALUATION ON THE TRACK DESIGNATED BY REFERENCE TN.
REQUEST UPDATE AND WATCH	3	MAKE AN INITIAL EW REPORT ON THE TRACK DESIGNATED BY REFERENCE TN, THEN MONITOR THE TRACK AND REPORT ONLY TACTICALLY SIGNIFICANT CHANGES.
REQUEST DIRECTED SEARCH	4	SEARCH DESIGNATED PARAMETERS AND REPORT RESULTS.
CANCEL REQUEST	5	CANCEL REQUEST INDICATED BY REQUEST NUMBER AND REFERENCE EW ACTION VALUE.
CEASE REPORT	6	CEASE REPORTING ON TRACK DESIGNATED BY REFERENCE TN AND REFERENCE EW ACTION VALUE, IF APPLICABLE.
EMITTER EVALUATION	7	AN INITIAL EVALUATION, OR AN

DFI NAME
1803 EW COORDINATION

DATA ITEM (CONTINUED) (CONTINUED)	BIT CODE	EXPLANATION
PARAMETER ASSOCIATION	8	ALTERATION OF A PREVIOUS EMITTER NUMBER, EMITTER FUNCTION, MODE NUMBER, MODULATION CODE, WARTIME RESERVE MODE INDICATOR, AND/OR EMITTER CONFIDENCE OF REFERENCE TN. THERE IS AN ASSOCIATION BETWEEN REFERENCE TN AND ASSOCIATED TN WITH SIMILAR PARAMETRIC INFORMATION, AND THE DETECTED EMISSIONS ARE DEEMED TO ORIGINATE FROM THE SAME EMITTER.
EMITTER ASSOCIATION	9	THE EW INFORMATION IDENTIFIED BY REFERENCE TN AND ASSOCIATED TN ARE DEEMED TO BE COLLOCATED, I.E., EMANATING FROM THE SAME PLATFORM BUT NOT THE SAME EMITTER.
DISASSOCIATION	10	DISASSOCIATE REFERENCE TN FROM ALL EXISTING PARAMETER AND/OR EMITTER ASSOCIATIONS, LEAVING THE REMAINDER OF ASSOCIATIONS INTACT.
NO FIND	11	THIS RESPONSE TO A DIRECTED ACTION STATES THAT NO INFORMATION WAS FOUND, OR THAT CONTACT HAS BEEN LOST.
RESPONSE TO AN ELECTRONIC WARFARE REQUEST	12	IDENTIFIES THE ACCOMPANYING REPORT AS A POSITIVE RESPONSE TO A DIRECTED ACTION.
EVALUATE TRACK	13	EVALUATE THE SECTOR SPECIFIED IN THE SECTOR WIDTH FIELD AND REPORT EA INTERCEPTS FOR THE DURATION OF TIME SPECIFIED IN THE TIME DURATION FIELD. THE BEARING BETWEEN THE RECEIVING JU AND THE REFERENCE TN DEFINES THE CENTER OF THE SECTOR FOR WHICH EA INTERCEPTS ARE REQUESTED. THE RECEIVING JU IS THE SECTOR ORIGIN.
EVALUATE SECTOR	14	EVALUATE THE SECTOR SPECIFIED IN THE SECTOR WIDTH FIELD AND REPORT EA INTERCEPTS FOR THE DURATION OF

B-855

APPENDIX B

MIL-STD-6016B

DFI NAME
1803 EW COORDINATION

DATA ITEM (CONTINUED) (CONTINUED)	BIT CODE	EXPLANATION
DIRECTION FINDER REQUEST	15	TIME SPECIFIED IN THE TIME DURATION FIELD. THE BEARING REPORTED IN THE BEARING FIELD DEFINES THE CENTER OF THE SECTOR FOR WHICH EA INTERCEPTS ARE REQUESTED. THE RECEIVING JU IS THE SECTOR ORIGIN.
PROTECT	16	UNIT IS DIRECTED TO TAKE A BEARING ON A TRACK DESIGNATED BY REFERENCE TN AT A SPECIFIED TIME. FRIENDLY FREQUENCY USED FOR A PARTICULAR OPERATION THAT IS IDENTIFIED AND PROTECTED IN ORDER TO PREVENT IT FROM BEING INADVERTENTLY JAMMED BY FRIENDLY FORCES WHILE ACTIVE EW OPERATIONS ARE DIRECTED AGAINST HOSTILE FORCES.
JAMMING REQUEST	17	JAMMING IS DESIRED AGAINST A SPECIFIED EMITTER, PLATFORM/SITE, CIRCUIT OR IN A SPECIFIC AREA.
DISUSED	18	
DEPLOY DECOYS	19	DECOY DEPLOYMENT DIRECTED. UTILIZE DECOY TYPE SPECIFIED.
PARAMETRIC DATA UPDATE REQUEST	20	THE UNIT SPECIFIED IN THE ADDRESSEE TN IS REQUESTED TO TRANSMIT ALL AVAILABLE PARAMETRIC DATA.
DISUSED	21	
DISUSED	22	
SET EMISSIONS CONTROL	23	SET EMCON SPECIFIED IN THE PLAN SOURCE AND PLAN NUMBER FIELDS.
DISUSED	24	
UNDEFINED	25	
TRACK NUMBER, REFERENCE/ INDEX NUMBER CORRELATION	26	INDICATES THAT THE REFERENCE TN AND THE INDEX NUMBER SPECIFIED ARE CORRELATED.
UNDEFINED	27	
DISUSED	28	
DISUSED	29	
GUARD	30	FREQUENCY THAT IS CURRENTLY BEING EXPLOITED FOR COMBAT INFORMATION

B-856

APPENDIX B

MIL-STD-6016B

DFI NAME
1803 EW COORDINATION

DATA ITEM (CONTINUED)
(CONTINUED)
TAB00

BIT CODE

31

EXPLANATION
AND INTELLIGENCE.
FREQUENCY OF SUCH IMPORTANCE THAT IT
MUST NEVER BE DELIBERATELY JAMMED
OR INTERFERED WITH BY FRIENDLY
FORCES.

UNDEFINED

32 THROUGH 63

----- FOR DUI 003 -----

REQUEST PERIODIC REPORT
REQUEST AUTOMATIC
EVALUATION
REQUEST MANUAL
EVALUATION
REQUEST UPDATE AND WATCH
REQUEST DIRECTED SEARCH
CANCEL REQUEST
CEASE REPORT
EMITTER EVALUATION
PARAMETER ASSOCIATION
EMITTER ASSOCIATION
DISASSOCIATION
NO FIND
RESPONSE TO AN
ELECTRONIC WARFARE
REQUEST
EVALUATE TRACK
EVALUATE SECTOR
DIRECTION FINDER REQUEST
PROTECT
JAMMING REQUEST
DISUSED
DEPLOY DECOYS
PARAMETRIC DATA UPDATE
REQUEST
DISUSED
DISUSED
SET EMISSIONS CONTROL
DISUSED
UNDEFINED

0
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25

B-857

MIL-STD-6016B
APPENDIX B

DFI NAME
1803 EW COORDINATION

DATA ITEM (CONTINUED) TRACK NUMBER, REFERENCE/ INDEX NUMBER CORRELATION	BIT CODE	EXPLANATION
UNDEFINED	26	
DISUSED	27	
DISUSED	28	
GUARD	29	
TABOO	30	
UNDEFINED	31	
NO STATEMENT	32 THROUGH 62	
	63	

DFI NAME
1804 SECTOR WIDTH

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 SECTOR WIDTH [8 BIT]	THE NUMBER OF DEGREES ON EACH SIDE OF THE SPECIFIED BEARING, TO THE NEAREST WHOLE DEGREE.	J14.0C1 J14.2C1

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
0 THROUGH 180 DEGREES ILLEGAL NO STATEMENT	0 THROUGH 180 181 THROUGH 254 255	IN ONE DEGREE INCREMENTS.

DFI NAME DEFINITION
1805 SECTOR/AREA/LOCATION INDICATOR INDICATES WHETHER THE REFERENCE TRACK NUMBER IN THE MESSAGE IS
A SECTOR, AREA OF PROBABILITY, OR LOCATION.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 SECTOR/AREA/LOCATION INDICATOR [2 BIT] (SAL IND)	INDICATES WHETHER THE REFERENCE TN IN THE MESSAGE IS A SECTOR, AREA OF PROBABILITY, OR LOCATION.	J14.2I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
SECTOR	1	
AREA OF PROBABILITY	2	
LOCATION	3	LATITUDE/LONGITUDE.

APPENDIX B

DFI	NAME	DEFINITION
1806	AXIS ORIENTATION	THE AXIS ORIENTATION IS THE OFFSET FROM TRUE NORTH EXPRESSED IN ONE DEGREE INCREMENTS FROM ZERO TO 179 AND IS USED TO ORIENT THE MAJOR AXIS OF AN AREA OF PROBABILITY.
DATA STANDARD USAGE: Link 16		STATUS:
DUI NAME	EXPLANATION	APPLICABILITY
001 AXIS ORIENTATION [8 BIT]	THE AXIS ORIENTATION IS THE OFFSET FROM TRUE NORTH EXPRESSED IN ONE DEGREE INCREMENTS FROM ZERO TO 179 AND IS USED TO ORIENT THE AREA MAJOR AXIS OF A CIRCLE, ELLIPSE, SQUARE, OR RECTANGLE.	J3.0C2 J3.0C5 J3.5C3 J3.7C2 J14.0C2 J14.2C2
002 AXIS ORIENTATION, 1 [8 BIT]	THE AXIS ORIENTATION IS THE OFFSET FROM TRUE NORTH EXPRESSED IN ONE DEGREE INCREMENTS FROM ZERO TO 179 AND IS USED TO ORIENT THE AREA MAJOR AXIS OF A CIRCLE, ELLIPSE, SQUARE, OR RECTANGLE.	J7.6C1
003 AXIS ORIENTATION, 2 [8 BIT]	THE AXIS ORIENTATION IS THE OFFSET FROM TRUE NORTH EXPRESSED IN ONE DEGREE INCREMENTS FROM ZERO TO 179 AND IS USED TO ORIENT THE AREA MAJOR AXIS OF A CIRCLE, ELLIPSE, SQUARE, OR RECTANGLE.	J7.6C1
DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001-003 -----		
0 THROUGH 179 DEGREES	0 THROUGH 179	IN ONE DEGREE INCREMENTS.
ILLEGAL	180 THROUGH 254	
NO STATEMENT	255	

DFI NAME
1808 PERIODICITY OF REPORT

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 PERIODICITY OF REPORT [3 BIT]	THE RATE AT WHICH REQUESTED REPORTS ARE TO BE SENT.	J14.2E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
UPON DETECTION, ONCE	1	
UPON DETECTION, AND	2	
1 MINUTE INTERVALS		
UPON DETECTION,	3	
5 MINUTE INTERVALS		
UPON DETECTION,	4	
15 MINUTE INTERVALS		
UPON DETECTION,	5	
HOURLY INTERVALS		
UPON DETECTION AND IN	6	
ACCORDANCE WITH NORMAL		
TRANSMIT RULES		
THEREAFTER		
UNDEFINED	7	

DFI	NAME	DEFINITION
1809	REQUEST NUMBER	PROVIDES AN AUDIT TRAIL FOR RESPONSES TO REQUESTS.

DATA STANDARD USAGE: Link 16	STATUS:
------------------------------	---------

DUI NAME	EXPLANATION	APPLICABILITY
001 REQUEST NUMBER [3 BIT]	PROVIDES AN AUDIT TRAIL FOR RESPONSES TO REQUESTS.	J14.0I J14.2I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
NUMERIC	1 THROUGH 7	

DFI NAME DEFINITION
1811 BEARING ORIGIN SPECIFIES THE ORIGIN OF THE BEARING OR AREA OF PROBABILITY.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
001 BEARING ORIGIN [1 BIT] (BNG ORG)	SPECIFIES THE ORIGIN OF THE BEARING.	J3.7C1	J14.0I	J14.2C1

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
TRACK NUMBER ORIGIN	0	THE ORIGIN OF THE BEARING IS FROM THE LOCATION OF THE ORIGIN TN.
LATITUDE/LONGITUDE	1	THE ORIGIN OF THE BEARING IS FROM THE LOCATION SPECIFIED IN THE LATITUDE AND LONGITUDE FIELDS.

B-864

MIL-STD-6016B
APPENDIX B

DFI	NAME	DEFINITION
1812	SOURCE	SPECIFIES THE SOURCE OF THE DATA BEING REPORTED.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 PARAMETER SOURCE [3 BIT] (SRC)	SPECIFIES THE SOURCE OF THE DATA BEING REPORTED.	J14.0C1

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
PARAMETRIC DATA SOURCE, MEASURED	1	
PARAMETRIC DATA SOURCE, LIBRARY	2	
STROBE SOURCE, ACTIVE RADAR	3	
STROBE SOURCE, OTHER	4	
REPORT SOURCE, RADIO DIRECTION FINDING	5	
REPORT SOURCE, OTHER	6	
UNDEFINED	7	

DFI NAME
1816 PRIORITY

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 TASK PRIORITY [3 BIT]	THE PRIORITY ASSIGNED TO THE ACTION SPECIFIED IN THE EW ACTION VALUE FIELD.	J14.2I
002 PRIORITY [3 BIT]	ASSIGNS NUMERICAL PRIORITY (WITH 1 BEING THE HIGHEST) OF A POINT OR AREA PREVIOUSLY REPORTED OR BEING REPORTED AS TN, REFERENCE IN THIS WORD. THE MEANING OF THE PRIORITY IS DEFINED BY THE OPERATIONAL COMMANDER.	J3.0I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
1ST PRIORITY/CRITICAL	1	
2ND PRIORITY/URGENT	2	
3RD PRIORITY	3	
UNDEFINED	4 THROUGH 6	
NOT TO INTERFERE BASIS	7	
----- FOR DUI 002 -----		
NO STATEMENT	0	
1 THROUGH 7	1 THROUGH 7	

DFI NAME
1818 RADIATION STATUS INDICATOR

DEFINITION
INDICATES THE EMISSION CONTROL RADIATION STATUS.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
----------	-------------	---------------

001 RADIATION STATUS INDICATOR [4 BIT]	INDICATES THE EMISSION CONTROL RADIATION STATUS.	J14.2C6
---	---	---------

DATA ITEM	BIT CODE	EXPLANATION
-----------	----------	-------------

----- FOR DUI 001 -----

NO STATEMENT	0	
ALPHA	1	

BRAVO	2	
-------	---	--

ECHO	3	
------	---	--

GOLF	4	
------	---	--

HOTEL	5	
-------	---	--

LIMA	6	
------	---	--

OSCAR	7	
-------	---	--

SIERRA	8	
--------	---	--

SAFETY: EQUIPMENT MAY BE OPERATED IF
ESSENTIAL TO SAFE CONDUCT OF
OPERATIONS.

EQUIPMENT MAY BE OPERATED IN ACTIVE
MODE.

ESSENTIAL MISSIONS: MINIMUM
RADIATION IS TO BE USED INVOLVING
THE RADIATION OF ELECTROMAGNETIC
AND ACOUSTIC EQUIPMENT ONLY TO THE
LIMITED DEGREE AND FOR THE MINIMUM
TIME REQUIRED TO ACCOMPLISH A
SPECIFIC MISSION OR TASK.

GUARD: DESIGNATED UNIT(S) IS/ARE TO
OPERATE EQUIPMENT OR MAINTAIN
GUARD ON DESIGNATED CIRCUITS ON
BEHALF OF OTHER UNITS (IFF GUARDS
KEEP PARENT RADARS SILENT).

HELICOPTER OPERATIONS: ESSENTIAL
OPERATIONS ARE AUTHORIZED BY UNITS
DIRECTLY INVOLVED IN THE DIRECTION
OF HELICOPTERS.

LAUNCHING AND LANDING AIRCRAFT:
ESSENTIAL OPERATION IS AUTHORIZED
WHEN LAUNCHING AND LANDING
AIRCRAFT.

OPERATION IS DIRECTED: MUST BE
OPERATED IN THE ACTIVE MODE. WILL
BE USED TO SIMULATE THE TRAFFIC
NORMALLY ASSOCIATED WITH THE
CIRCUITS.

SILENCE: NO EMISSIONS ARE TO BE MADE

DFI NAME
1818 RADIATION STATUS INDICATOR

DATA ITEM (CONTINUED)
(CONTINUED)

BIT CODE

EXPLANATION
EXCEPT THE STANDARD OCCASIONS FOR
BREAKING EMCON. EQUIPMENT IS TO
BE IN A HIGH STATE OF READINESS
WITHOUT ACTUAL RADIATION.
TIME SHARING: EQUIPMENT IS TO BE
OPERATED IN ACCORDANCE WITH THE
TIME SHARING PLAN IN EFFECT
BETWEEN UNITS OF THE FORCE. UNIQUE
EMITTERS IDENTIFIED BY THE OFFICER
IN TACTICAL COMMAND ARE NOT TO BE
RADIATED.
TOTAL SILENCE: NO EMISSION IS
AUTHORIZED. EQUIPMENT MAIN POWER
SOURCE SECURED.

TANGO

9

XRAY

10

UNDEFINED

11 THROUGH 15

DFI NAME
1819 FREQUENCY/FREQUENCY RANGE
INDICATOR

DEFINITION
THIS FIELD IS USED TO INDICATE WHETHER THE MESSAGE IS
DESCRIBING A SINGLE FREQUENCY OR A FREQUENCY RANGE.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
001 FREQUENCY/FREQUENCY RANGE INDICATOR [1 BIT] (F/R IND)	FREQUENCY/FREQUENCY RANGE INDICATOR FIELD IS USED WITH THE FOLLOWING FIELDS TO INDICATE THAT A FREQUEN- CY OR A FREQUENCY RANGE IS BEING DESCRIBED: FREQUENCY MULTI- PLIER, 1; FREQUENCY, 1; FREQUENCY MULTIPLIER, 2; FREQUENCY, 2.	J3.7C4	J14.0E0	J14.2C4

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
FREQUENCY	0	THE FREQUENCY, 1 FIELD AND THE FREQUENCY MULTIPLIER, 1 FIELD SHOULD BE INTERPRETED TO DETERMINE THE SINGLE FREQUENCY BEING TRANSMITTED IN THIS MESSAGE. THE FREQUENCY, 2 FIELD AND THE FREQUENCY MULTIPLIER, 2 FIELD SHOULD BE 0SET TO NO STATEMENT AND NOT BE INTERPRETED.
FREQUENCY RANGE	1	THE FREQUENCY AND FREQUENCY MULTIPLIER FIELDS SHOULD BE INTERPRETED TO DETERMINE THE UPPER AND LOWER LIMITS OF THE FREQUENCY RANGE BEING TRANSMITTED IN THIS MESSAGE.

DFI NAME
1820 FREQUENCY SCALE INDICATOR

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
003 FREQUENCY MULTIPLIER, 1 [4 BIT] (FRQ ML1)	EXPRESSED AS A POWER OF TEN. THIS FIELD IS USED AS A MULTIPLIER TO DETERMINE THE FREQUENCY, 1.	J3.7C4	J14.0E0	J14.2C4
004 FREQUENCY MULTIPLIER, 2 [4 BIT] (FRQ ML2)	EXPRESSED AS A POWER OF TEN. THIS FIELD IS USED AS A MULTIPLIER TO DETERMINE THE FREQUENCY, 2.	J3.7C4	J14.0E0	J14.2C4

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 003 -----		
NUMERIC	0 THROUGH 14	
NO STATEMENT	15	
----- FOR DUI 004 -----		
NUMERIC	0 THROUGH 14	
NO STATEMENT	15	

DFI NAME DEFINITION
1821 WARTIME RESERVE MODE INDICATOR INDICATES THAT AN EMITTER IS OPERATING IN ITS NORMAL OPERATING
MODE OR IN ITS WARTIME RESERVE MODE.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 WARTIME RESERVE MODE INDICATOR [1 BIT] (WTR MDE)	WARTIME RESERVE MODE INDICATOR IS TO BE USED WITH THE EMITTER NUMBER FIELD TO INDICATE WHICH MODE THE EMITTER IS OPERATING IN.	J3.7C3 J14.0C3 J14.2C3

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NORMAL OPERATIONS	0	INDICATES THE EMITTER IS FUNCTIONING IN ITS NORMAL OPERATING MODE.
WARTIME RESERVE MODE	1	INDICATES THE EMITTER IS FUNCTIONING IN ITS WARTIME RESERVE MODE. WARTIME RESERVE MODE IS: AN INTENTIONAL CHANGE IN OBSERVABLE ELECTRO-MAGNETIC EMITTER PARAMETER OR OPERATIONAL PROCEDURE INTENDED TO REDUCE THE EFFECTIVENESS OF EW EQUIPMENT OR OTHER DETECTION, CLASSIFICATION, AND SUPPORT ACTIVITIES OF OPPOSING FORCES. THESE MODES ARE DELIBERATELY HELD IN RESERVE FOR WARTIME EMERGENCY USE AND ARE SELDOM, IF EVER, INTERCEPTED OR OBSERVED PRIOR TO THE EMERGENCY. ALSO CALLED WARM.

B-871

MIL-STD-6016B
APPENDIX B

DFI NAME DEFINITION
1822 EMISSION CONTROL PLAN A LETTER OR NUMBER THAT IDENTIFIES A SPECIFIC EMISSION CONTROL PLAN AS IDENTIFIED IN AN OPERATIONS ORDER.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 EMISSION CONTROL PLAN [4 BIT]	A LETTER OR NUMBER THAT IDENTIFIES A SPECIFIC EMISSION CONTROL PLAN AS IDENTIFIED IN AN OPERATIONS ORDER.	J14.2C6

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
1 OR A	1	
2 OR B	2	
3 OR C	3	
4 OR D	4	
5 OR E	5	
6 OR F	6	
7 OR G	7	
8 OR H	8	
9 OR I	9	
10 OR J	10	
11 OR K	11	
12 OR L	12	
13 OR M	13	
14 OR N	14	
15 OR O	15	

DFI NAME
1824 PLAN MODIFICATION

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 PLAN MODIFICATION [3 BIT] (PLN MOD)	IDENTIFIES THE ELEMENT WITHIN THE PLAN WHICH IS TO BE MODIFIED.	J14.2C6

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
EMITTER	1	
PLATFORM	2	
RADIATION RESTRICTION	3	
RADIATE TIME INCREASE	4	
RADIATE TIME DECREASE	5	
UNDEFINED	6 THROUGH 7	

DFI NAME
1825 RADIATION RESTRICTION

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 RADIATION RESTRICTION [6 BIT]	IDENTIFIES THE EQUIPMENT TYPE/ FREQUENCY RANGE OF EMITTERS TO WHICH RADIATION RESTRICTIONS ARE IMPLEMENTED.	J14.2C6

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
ALL SEARCH/HEIGHT FINDER RADARS	1	
ALL FIRE CONTROL/MISSILE CONTROL (FC/MC) RADARS	2	
ALL EW EQUIPMENT	3	
ALL NAVIGATION AIDS (NAVAIDS)	4	
ALL ACOUSTIC EQUIPMENT	5	
ALL COMMUNICATIONS	6	
A/B BAND SEARCH/HEIGHT FINDER RADARS	7	
C/D BAND SEARCH/HEIGHT FINDER RADARS	8	
E/F BAND SEARCH/HEIGHT FINDER RADARS	9	
G/H BAND SEARCH/HEIGHT FINDER RADARS	10	
I BAND SEARCH/HEIGHT FINDER RADARS	11	
J BAND SEARCH/HEIGHT FINDER RADARS	12	
K BAND SEARCH/HEIGHT FINDER RADARS	13	
E/F BAND FC/MC RADARS	14	
G/H BAND FC/MC RADARS	15	
I BAND FC/MC RADARS	16	
J BAND FC/MC RADARS	17	
K BAND FC/MC RADARS	18	
ALL JAMMERS	19	

DFI NAME
1825 RADIATION RESTRICTION

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
A/B BAND JAMMERS	20	
C/D BAND JAMMERS	21	
E/F BAND JAMMERS	22	
G/H BAND JAMMERS	23	
I BAND JAMMERS	24	
J BAND JAMMERS	25	
K BAND JAMMERS	26	
COMMUNICATIONS JAMMERS	27	
ALL DECEPTIVE ELECTRONIC ATTACK (DEA)	28	
E/F BAND DEA	29	
G/H BAND DEA	30	
I BAND DEA	31	
J BAND DEA	32	
K BAND DEA	33	
ULTRA HIGH FREQUENCY/ VERY HIGH FREQUENCY (UHF/VHF) BEACONS	34	
LOW FREQUENCY/MEDIUM FREQUENCY (LF/MF) BEACONS	35	
RADAR ALTIMETERS	36	
IFF INTERROGATORS	37	
IFF TRANSPONDERS	38	
HELICOPTER TRANSPONDERS	39	
TACAN	40	
DOPPLER EQUIPMENT	41	
FATHOMETERS	42	
UNDERWATER TELEPHONE	43	
NOISE MAKERS	44	
SIMULATORS	45	
SHORT RANGE SONAR	46	
MEDIUM RANGE SONAR	47	
LONG RANGE SONAR	48	
EXPLOSIVE ECHO SOUNDERS	49	
ALL UHF COMMUNICATIONS	50	
ALL VHF COMMUNICATIONS	51	
ALL MF/HIGH FREQUENCY (HF) COMMUNICATIONS	52	
ALL SUPER HIGH FREQUENCY (SHF) COMMUNICATIONS	53	

B-875

MIL-STD-6016B
APPENDIX B

DFI NAME
1825 RADIATION RESTRICTION

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
HF DATALINK	54	
UHF DATALINK	55	
ALL TRANSMITTERS	56	
COMMUNICATIONS		
ALL RECEIVERS	57	
COMMUNICATIONS		
SATELLITE COMMUNICATIONS	58	
(SATCOM)		
METEOROLOGICAL AIDS	59	
(METAIDS)/RADIOSONDE		
CIRCUITS SPECIFIED IN	60	
CIRCUIT FIELD		
UNDEFINED	61 THROUGH 63	

DFI NAME
1826 CHANGE RADIATION FACTOR

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 CHANGE RADIATION FACTOR [3 BIT]	THE MULTIPLIER TO BE APPLIED TO THE RADIATE TIME IN THE TIME SHARING PLAN IN EFFECT.	J14.2C6

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
DOUBLE	1	
TRIPLE	2	
HALF	3	
ONE THIRD	4	
UNDEFINED	5 THROUGH 7	

DFI NAME
1827 CIRCUIT

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 CIRCUIT [6 BIT]	THE SPECIFIC COMMUNICATION CIRCUIT WHICH IS TO HAVE THE RADIATION RESTRICTION MODIFIED.	J14.2C6

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
COMMAND AND CONTROL NON DATA LINK	1	
INTELLIGENCE/EW NON DATA LINK	2	
SUPPORT NON DATA LINK	3	
AIR DEFENSE NON DATA LINK	4	
FIRE SUPPORT/CONTROL NON DATA LINK	5	
RELAY NON DATA LINK	6	
FLIGHT OPERATIONS NON DATA LINK	7	
UNDEFINED	8 THROUGH 63	

DFI NAME DEFINITION
1833 AUTOMATIC EA NEGATION

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 AUTOMATIC ELECTRONIC ATTACK NEGATION [1 BIT] (AUT NEG)		J14.2E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
BREAK ENGAGE	1	

DFI NAME
1834 TIME SHARING IMPLEMENTATION

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 TIME SHARING IMPLEMENTATION [6 BIT]	IDENTIFIES THE EMITTER TYPE FOR WHICH THE TIME SHARING PLAN IS TO BE IMPLEMENTED.	J14.2C6

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
ALL EMITTERS IN PLAN	1	
RADAR SURFACE NAVIGATION	2	
RADAR SURFACE SEARCH	3	
RADAR SURFACE AIRBORNE EARLY WARNING	4	
RADAR SURFACE HEIGHT FINDERS	5	
RADAR SURFACE 3D	6	
RADAR SURFACE FIRE CONTROL GUN	7	
RADAR SURFACE FIRE CONTROL MISSILE	8	
RADAR AIRBORNE EARLY WARNING	9	
RADAR AIRBORNE INTERCEPT (AI)	10	
RADAR GROUND AIR DEFENSE ARTILLERY	11	
RADAR GROUND COUNTER MORTAR/COUNTER BATTERY	12	
RADAR GROUND LONG RANGE SURVEILLANCE	13	
RADAR GROUND MEDIUM RANGE SURVEILLANCE	14	
RADAR GROUND SHORT RANGE SURVEILLANCE	15	
JAMMER, COMMUNICATION	16	
JAMMER, NON-COMMUNICA- TION	17	

DFI NAME
1834 TIME SHARING IMPLEMENTATION

DATA ITEM (CONTINUED)
UNDEFINED

BIT CODE
18 THROUGH 63

EXPLANATION

DFI NAME DEFINITION
1836 PLAN SOURCE DEFINES THE SOURCE OF THE PLAN.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 PLAN SOURCE [2 BIT] (PLN SRC)	DEFINES THE SOURCE OF THE PLAN.	J14.2C6

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
LOCAL/PROMULGATED BY FORCE COMMANDER	1	
PREPLANNED/STANDING OPERATION ORDER	2	
UNDEFINED	3	

DFI	NAME	DEFINITION
1839	IMMEDIATE ACTION INDICATOR	INDICATES WHETHER IMMEDIATE ACTION IS REQUIRED.
DATA STANDARD USAGE: Link 16		STATUS:
DUI NAME	EXPLANATION	APPLICABILITY
001 IMMEDIATE ACTION INDICATOR [1 BIT] (IMM ACT)	INDICATES WHETHER IMMEDIATE ACTION IS REQUIRED.	J14.2E0
DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
IMMEDIATE ACTION IS REQUIRED	1	

DFI	NAME	DEFINITION
1840	TIME DURATION	INDICATES THE LENGTH OF TIME THE ACTION IS TO BE PERFORMED.
DATA STANDARD USAGE: Link 16		STATUS:
DUI NAME	EXPLANATION	APPLICABILITY
001 TIME DURATION [4 BIT]	INDICATES THE LENGTH OF TIME THE ACTION IS TO BE PERFORMED.	J14.2E0
DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
1 SECOND	1	
2 SECONDS	2	
3 SECONDS	3	
4 SECONDS	4	
5 SECONDS	5	
10 SECONDS	6	
15 SECONDS	7	
20 SECONDS	8	
25 SECONDS	9	
30 SECONDS	10	
UNDEFINED	11	
1 MINUTE	12	
5 MINUTES	13	
20 MINUTES	14	
30 MINUTES	15	

DFI NAME
1843 EMITTER FUNCTION

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 EMITTER FUNCTION [7 BIT]	THE REPRESENTATION OF THE FUNCTION OR ONE OF THE FUNCTIONS OF AN EMITTER.	J14.0C3 J14.2C3

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
AA, ANTI AIRCRAFT FIRE CONTROL	1	
AB, AIRBORNE SEARCH AND BOMBING	2	
AC, AIR SEARCH	3	
AE, AIRBORNE EARLY WARNING	4	
AF, AIRBORNE FIRE CONTROL	5	
AG, AIRBORNE GUN LAYING (PLANE TO PLANE)	6	
AI, AIRBORNE INTERCEPT	7	
AL, ALTIMETER	8	
AM, AIRBORNE RECON/ MAPPING	9	
AQ, ACQUISITION	10	
AR, AIRBORNE RANGE ONLY	11	
AS, ATMOSPHERIC SOUNDING	12	
AT, AIR TRAFFIC CONTROL	13	
BC, BROADCAST	14	
BM, BOMBING	15	
BN, BEACON/TRANSPONDER	16	
BO, BOMBING THROUGH OVERCAST	17	
BS, BATTLEFIELD SURVEILLANCE	18	
BT, BALLOON TRACKER	19	
CA, CARRIER CONTROLLED APPROACH	20	

DFI NAME
1843 EMITTER FUNCTION

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
CI, CARRIER CONTROL INTERCEPT	21	
CM, COMMUNICATION	22	
CR, COMMUNICATIONS RECEIVER	23	
CS, COASTAL SURVEILLANCE	24	
CT, COMMUNICATIONS TRANSMITTER	25	
DC, DRONE CONTROL	26	
DF, DIRECTION FINDING	27	
DM, DISTANCE MEASURE	28	
DT, DATA TRANSMISSION	29	
DU, DUMMY SITE	30	
EA, ELECTRONIC ATTACK	31	
ES, ELECTROMAGNETIC SENSOR	32	
ET, EARLY WARNING/TARGET ACQUISITION	33	
EW, EARLY WARNING	34	
FC, FIRE CONTROL	35	
FS, FREQUENCY STANDARD	36	
GA, GROUND CONTROLLING APPROACH	37	
GB, GUN LAYING BEACON	38	
GI, GROUND CONTROL INTERCEPT	39	
GL, GUN LAYING	40	
GM, GUIDED MISSILE	41	
GP, GLIDE PATH	42	
GS, GROUND SPEED INDICATOR	43	
GU, GUIDANCE	44	
GX, GROUND CONTROLLED APPROACH SURVEILLANCE	45	
HF, HEIGHT FINDING	46	
HS, HARBOR SURVEILLANCE	47	
ID, INTRUSION DETECTOR SYSTEM	48	
IF, IFF	49	
IL, INSTRUMENT LANDING SYSTEM	50	

B-886

DFI NAME
1843 EMITTER FUNCTION

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
IM, ILLUMINATOR	51	
IS, IONOSPHERIC SOUNDING	52	
JM, JAMMER	53	
LA, LOW ANGLE FIRE	54	
CONTROL GUN LAYING		
LN, LORAN	55	
LO, LOCALIZER	56	
MA, MISSILE ACQUISITION	57	
MB, MARKER BEACON	58	
MC, MISSILE CONTROL	59	
ME, METEOROLOGICAL	60	
MG, MISSILE GUIDANCE	61	
MH, MISSILE HOMER	62	
MP, MARSHALLING POINT	63	
FOR NONCOMMUNICATIONS		
EQUIPMENT		
MR, MICROWAVE RELAY	64	
MT, MISSILE TRACKING	65	
NA, NAVIGATIONAL	66	
NW, NAVIGATION/WEATHER	67	
AVOIDANCE		
PA, PRECISION APPROACH	68	
PD, PASSIVE DETECTION	69	
PE, PRECISION ELEVATION	70	
RADAR		
PI, PROJECTILE INTERCEPT	71	
PL, PERSONNEL DETECTOR	72	
PR, PASSIVE RANGING	73	
PW, PROXIMITY WARNING	74	
RADAR		
RA, RADAR DATA	75	
RD, RADAR DECOY	76	
RI, RANGE INSTRUMENTA-	77	
TION		
RO, RANGE ONLY	78	
RR, RADIO RELAY	79	
RS, RADIO/RADARSONDE	80	
SA, SATELLITE TRACKER	81	
SB, SONOBUOY	82	
SC, SATELLITE	83	
COMMUNICATIONS		

B-887

DFI NAME
1843 EMITTER FUNCTION

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
SE, SURFACE SEARCH/EARLY WARNING	84	
SF, SURFACE FIRE CONTROL	85	
SH, SEARCH/HEIGHT FINDER	86	
SL, SEARCHLIGHT CONTROL	87	
SP, SPACE SURVEILLANCE	88	
SR, SEARCH RADAR	89	
SS, SURFACE SEARCH	90	
ST, SHELL TRACKING	91	
SV, SENSOR RELAY	92	
SX, SIF TRANSPONDER	93	
TA, TARGET ACQUISITION	94	
TD, 3-D RADAR	95	
TF, TAIL FIRE CONTROL	96	
TM, TELEMETERING	97	
TR, TRANSMITTER/RECEIVER COMMUNICATION	98	
TS, TROPO-SCATTER	99	
TT, TARGET TRACKING	100	
TV, TELEVISION	101	
TW, TAIL WARNING	102	
TY, TELETYPE	103	
UN, UNKNOWN	104	
VA, VIDEO DATA	105	
VD, VEHICLE DETECTOR	106	
VR, VIDEO REMOTING	107	
VT, PROXIMITY FUSE	108	
XP, EXPERIMENTAL/TRAINER	109	
LS-LASER	110	
UNDEFINED	111 THROUGH 127	

B-888

MIL-STD-6016B
APPENDIX B

DFI NAME
1847 DECOY MISSION

DEFINITION
THE MISSION OF THE DECOY TYPE SPECIFIED.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 DECOY MISSION [3 BIT]	DECOY MISSION IS TO BE USED WITH DECOY TYPE TO SPECIFY THE MISSION OF DECOY TYPE INDICATED.	J14.2E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
SEDUCTION	1	TRANSFER MISSILE HOMING HEAD LOCK-ON FROM THE TARGET.
CONFUSION	2	DELAY TARGET SELECTION BY THE SEARCH AND ACQUISITION RADAR.
DISTRACTION	3	DECEIVE THE INITIAL LOCK-ON BY THE MISSILE.
UNDEFINED	4 THROUGH 7	

DFI	NAME	DEFINITION
1848	DECOY TYPE	SPECIFIES THE TYPE OF DECOY.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 DECOY TYPE [3 BIT] (DCY TYP)	SPECIFIES THE TYPE OF DECOY.	J14.2E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
ACTIVE ELECTRONIC DECOY	1	
CHAFF	2	
INFRARED	3	
ELECTRO-OPTICAL	4	
CORNER REFLECTOR	5	
UNDEFINED	6 THROUGH 7	

DFI NAME
1849 MODULATION CODE

DEFINITION
INDICATES THE TYPE OF SIGNAL MODULATION.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 MODULATION CODE [4 BIT] (MOD COD)	INDICATES THE TYPE OF SIGNAL MODULATION.	J14.0C3 J14.2C3
DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
AMPLITUDE MODULATED	1	INFORMATION IS ADDED TO A CARRIER FREQUENCY BY VARYING THE AMPLITUDE OF THE RF ENERGY.
PULSED	2	RF ENERGY IS TURNED ON AND OFF TO PRODUCE A SERIES OF RF ENERGY PULSES.
CONTINUOUS WAVE	3	SINE WAVE RF ENERGY THAT VARIES OVER A NARROW RANGE OF AMPLITUDE OR FREQUENCIES.
PULSE MODULATED	4	RF ENERGY IS TURNED ON AND OFF AT DISCRETE INTERVALS TO PRODUCE A SERIES OF PULSES WITH DETERMINABLE PULSE AMPLITUDE, PULSE REPETITION INTERVAL, AND PULSE WIDTH.
FREQUENCY MODULATED	5	INFORMATION IS ADDED TO A CARRIER WAVE BY VARYING THE CARRIER'S CENTER FREQUENCY.
PHASE MODULATED	6	THE INFORMATION WAVE IS ADDED TO THE CARRIER FREQUENCY BY CHANGING THE PHASE RELATIONSHIP WITHIN THE CARRIER SINE WAVE.
PULSE STAGGER	7	THE PULSE REPETITION INTERVAL OF A PULSE MODULATED SIGNAL CHANGES AT EACH OCCURRENCE OF THE MAIN-BANG OR SYNC PULSE IN DISCRETE STEPS.
PULSE DOPPLER	8	PULSE MODULATED SIGNALS WITH A HIGH PRF ARE USED IN PRECISION RADAR APPLICATIONS. THE RADAR TARGET'S VELOCITY IS DETERMINED BY MEASURING CHANGES IN THE CENTER FREQUENCY OF THE ECHO PULSE WITH RELATION TO THE

APPENDIX B

DFI NAME
1849 MODULATION CODE

DATA ITEM (CONTINUED) (CONTINUED)	BIT CODE	EXPLANATION
NOISE JAMMING	9	TRANSMITTED PULSE CENTER FREQUENCY. THE PULSES ARE USED TO DETERMINE TARGET RANGE. AN AM OR FM SIGNAL MODULATED WITH NOISE THAT IS USED TO REDUCE THE EFFECTIVENESS OF SIGNALS OPERATING IN THE SAME FREQUENCY RANGE AS THE NOISE SIGNAL.
CODE MODULATION PULSE	10	SEQUENCES OF PULSES USED TO CONVEY INFORMATION EITHER IN THE FORM OF PULSE AMPLITUDE, PULSE WIDTH, PULSE GROUP, OR PULSE POSITION RELATIONSHIPS. MODULATION ON TOP OF THE PULSES USING FM, AM, OR PHASE MODULATION TECHNIQUES MAY ADD TO THE INFORMATION CONTENT OF PULSE MODULATION SIGNALS.
TIME DIVISION	11	ALLOCATION OF SIGNAL FUNCTION IN RELATIONSHIP TO THE START TIME OF THE SIGNAL INFORMATION CYCLE PROVIDES A DIVISION OF INFORMATION TRANSMISSION TIME THAT ALLOWS DIFFERENT INFORMATION SOURCES TO SHARE A SINGLE RF CARRIER.
UNDETERMINED UNDEFINED	12 13 THROUGH 15	

DFI	NAME	DEFINITION
1850	CALLSIGN	REPORTS THE OBSERVED OR PUBLISHED CALLSIGN (ATC, AMC).

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 CALLSIGN, OBSERVED [60 BIT] (CAL SGN)	REPORTS THE OBSERVED CALLSIGN.	J14.0C6 J14.2C7
002 CALLSIGN, PUBLISHED [54 BIT]		J3.2C4

DATA ITEM	BIT CODE	EXPLANATION
-----------	----------	-------------

----- FOR DUI 001 -----

CALLSIGN, OBSERVED	THE 60 BITS ARE DIVIDED INTO TEN GROUPS OF 6 BITS. EACH GROUP IS INTERPRETED INDEPENDENTLY IN ACCORDANCE WITH THE FOLLOWING CODE:
--------------------	---

BLANK	0
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
A	10
B	11
C	12
D	13
E	14
F	15
G	16
H	17
I	18
J	19
K	20
L	21
M	22
N	23

APPENDIX B

DFI NAME
1850 CALLSIGN

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
0	24	
P	25	
Q	26	
R	27	
S	28	
T	29	
U	30	
V	31	
W	32	
X	33	
Y	34	
Z	35	
UNDEFINED	36 THROUGH 62	
ZERO	63	

----- FOR DUI 002 -----

CALLSIGN, PUBLISHED

THE 54 BITS ARE DIVIDED INTO NINE
GROUPS OF SIX BITS. EACH GROUP IS
INTERPRETED INDEPENDENTLY IN
ACCORDANCE WITH THE FOLLOWING
CODE:

BLANK	0
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
A	10
B	11
C	12
D	13
E	14
F	15
G	16
H	17
I	18

DFI NAME
1850 CALLSIGN

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
J	19	
K	20	
L	21	
M	22	
N	23	
O	24	
P	25	
Q	26	
R	27	
S	28	
T	29	
U	30	
V	31	
W	32	
X	33	
Y	34	
Z	35	
UNDEFINED	36 THROUGH 62	
ZERO	63	

DFI NAME
1851 CHARACTER

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 CHARACTER #1 [6 BIT]	CHARACTER IN A TEXT MESSAGE. DEFINED AS A STANDARDS CODE FOR GENERAL APPLICATION USE FOR COMMUNICATING FIXED OR VARIABLE FORMAT CHARACTER DATA.	J7.3C2 J28.20I
002 CHARACTER #2 [6 BIT]	CHARACTER IN A TEXT MESSAGE. DEFINED AS A STANDARDS CODE FOR GENERAL APPLICATION USE FOR COMMUNICATING FIXED OR VARIABLE FORMAT CHARACTER DATA.	J7.3C2 J28.20I
003 CHARACTER #3 [6 BIT]	CHARACTER IN A TEXT MESSAGE. DEFINED AS A STANDARDS CODE FOR GENERAL APPLICATION USE FOR COMMUNICATING FIXED OR VARIABLE FORMAT CHARACTER DATA.	J7.3C2 J28.20E0
004 CHARACTER #4 [6 BIT]	CHARACTER IN A TEXT MESSAGE. DEFINED AS A STANDARDS CODE FOR GENERAL APPLICATION USE FOR COMMUNICATING FIXED OR VARIABLE FORMAT CHARACTER DATA.	J7.3C2 J28.20E0
005 CHARACTER #5 [6 BIT]	CHARACTER IN A TEXT MESSAGE. DEFINED AS A STANDARDS CODE FOR GENERAL APPLICATION USE FOR COMMUNICATING FIXED OR VARIABLE FORMAT CHARACTER DATA.	J7.3C2 J28.20E0
006 CHARACTER #6 [6 BIT]	CHARACTER IN A TEXT MESSAGE. DEFINED AS A STANDARDS CODE FOR GENERAL APPLICATION USE FOR COMMUNICATING FIXED OR VARIABLE FORMAT CHARACTER DATA.	J7.3C2 J28.20E0
007 CHARACTER #7 [6 BIT]	CHARACTER IN A TEXT MESSAGE. DEFINED AS A STANDARDS CODE FOR GENERAL APPLICATION USE FOR	J7.3C2 J28.20E0

DFI NAME
1851 CHARACTER

DUI NAME	EXPLANATION	APPLICABILITY
007 (CONTINUED)	COMMUNICATING FIXED OR VARIABLE FORMAT CHARACTER DATA.	
008 CHARACTER #8 [6 BIT]	CHARACTER IN A TEXT MESSAGE. DEFINED AS A STANDARDS CODE FOR GENERAL APPLICATION USE FOR COMMUNICATING FIXED OR VARIABLE FORMAT CHARACTER DATA.	J7.3C2 J28.20E0
009 CHARACTER #9 [6 BIT]	CHARACTER IN A TEXT MESSAGE. DEFINED AS A STANDARDS CODE FOR GENERAL APPLICATION USE FOR COMMUNICATING FIXED OR VARIABLE FORMAT CHARACTER DATA.	J7.3C2 J28.20E0
010 CHARACTER #10 [6 BIT]	CHARACTER IN A TEXT MESSAGE. DEFINED AS A STANDARDS CODE FOR GENERAL APPLICATION USE FOR COMMUNICATING FIXED OR VARIABLE FORMAT CHARACTER DATA.	J7.3C2 J28.20E0
011 CHARACTER #11 [6 BIT]	CHARACTER IN A TEXT MESSAGE. DEFINED AS A STANDARDS CODE FOR GENERAL APPLICATION USE FOR COMMUNICATING FIXED OR VARIABLE FORMAT CHARACTER DATA.	J7.3C3 J28.20E0
012 CHARACTER #12 [6 BIT]	CHARACTER IN A TEXT MESSAGE. DEFINED AS A STANDARDS CODE FOR GENERAL APPLICATION USE FOR COMMUNICATING FIXED OR VARIABLE FORMAT CHARACTER DATA.	J7.3C3 J28.20E0
013 CHARACTER #13 [6 BIT]	CHARACTER IN A TEXT MESSAGE. DEFINED AS A STANDARDS CODE FOR GENERAL APPLICATION USE FOR COMMUNICATING FIXED OR VARIABLE FORMAT CHARACTER DATA.	J7.3C3 J28.20E0
014 CHARACTER #14 [6 BIT]	CHARACTER IN A TEXT MESSAGE. DEFINED AS A STANDARDS CODE FOR	J7.3C3

DFI NAME
1851 CHARACTER

DUI NAME	EXPLANATION	APPLICABILITY
014 (CONTINUED)	GENERAL APPLICATION USE FOR COMMUNICATING FIXED OR VARIABLE FORMAT CHARACTER DATA.	
015 CHARACTER #15 [6 BIT]	CHARACTER IN A TEXT MESSAGE. DEFINED AS A STANDARDS CODE FOR GENERAL APPLICATION USE FOR COMMUNICATING FIXED OR VARIABLE FORMAT CHARACTER DATA.	J7.3C3
016 CHARACTER #16 [6 BIT]	CHARACTER IN A TEXT MESSAGE. DEFINED AS A STANDARDS CODE FOR GENERAL APPLICATION USE FOR COMMUNICATING FIXED OR VARIABLE FORMAT CHARACTER DATA.	J7.3C3
017 CHARACTER #17 [6 BIT]	CHARACTER IN A TEXT MESSAGE. DEFINED AS A STANDARDS CODE FOR GENERAL APPLICATION USE FOR COMMUNICATING FIXED OR VARIABLE FORMAT CHARACTER DATA.	J7.3C3
018 CHARACTER #18 [6 BIT]	CHARACTER IN A TEXT MESSAGE. DEFINED AS A STANDARDS CODE FOR GENERAL APPLICATION USE FOR COMMUNICATING FIXED OR VARIABLE FORMAT CHARACTER DATA.	J7.3C3
019 CHARACTER #19 [6 BIT]	CHARACTER IN A TEXT MESSAGE. DEFINED AS A STANDARDS CODE FOR GENERAL APPLICATION USE FOR COMMUNICATING FIXED OR VARIABLE FORMAT CHARACTER DATA.	J7.3C3
020 CHARACTER #20 [6 BIT]	CHARACTER IN A TEXT MESSAGE. DEFINED AS A STANDARDS CODE FOR GENERAL APPLICATION USE FOR COMMUNICATING FIXED OR VARIABLE FORMAT CHARACTER DATA.	J7.3C3

DFI NAME
1851 CHARACTER

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001-020 -----		
@	0	
A-Z	1 THROUGH 26	
[	27	
\	28	
]	29	
^	30	
_	31	
(SPACE)	32	BLANK/NO STATEMENT.
!	33	
"	34	
#	35	
\$	36	
%	37	
&	38	
'	39	APOSTROPHE.
(	40	
)	41	
*	42	
+	43	
,	44	COMMA.
-	45	
.	46	
/	47	
0-9	48 THROUGH 57	
:	58	
;	59	
<	60	
=	61	
>	62	
?	63	

DFI	NAME	DEFINITION
1852	ELEVATION ANGLE/ALTITUDE INDICATOR	INDICATES WHETHER ELEVATION ANGLE OR ALTITUDE IS BEING REPORTED.

DATA STANDARD USAGE: Link 16	STATUS:
------------------------------	---------

DUI NAME	EXPLANATION	APPLICABILITY
001 ELEVATION ANGLE/ALTITUDE INDICATOR [2 BIT] (ELV ALT)	INDICATES WHETHER ELEVATION ANGLE OR ALTITUDE IS BEING REPORTED.	J14.0C1

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
ELEVATION ANGLE IS BEING REPORTED	1	
ALTITUDE IS BEING REPORTED	2	
UNDEFINED	3	

DFI NAME DEFINITION
1860 IDENTITY DIFFERENCE INDICATOR

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY		
001 IDENTITY DIFFERENCE INDICATOR [1 BIT] (ID DIF)	THE IDENTITY DIFFERENCE INDICATOR IS USED TO INDICATE THAT A CONFLICT IN THE IDENTITY OF THE TRACK/ REFERENCE TN IS CURRENTLY BEING EVALUATED BY THE UNIT WITH REPORTING RESPONSIBILITY.	J3.2I J3.5I	J3.3I J3.6I	J3.4I J3.7I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	NO IDENTITY DIFFERENCE EXISTS ON REFERENCE TN AT THIS TIME, OR PREVIOUS CONFLICT HAS BEEN RESOLVED.
IDENTITY DIFFERENCE	1	AN IDENTITY DIFFERENCE EXISTS ON REFERENCE TN. THE IDENTITY BEING REPORTED IS THE LATEST IDENTITY LOCALLY HELD BY THE UNIT WITH REPORTING RESPONSIBILITY PRIOR TO THE CONFLICT, NOT THE CONFLICTING IDENTITY CURRENTLY UNDER OPERATOR EVALUATION.

B-901

MIL-STD-6016B
APPENDIX B

DFI	NAME	DEFINITION
1861	SPECIAL INTEREST INDICATOR	THE SPECIAL INTEREST INDICATOR IS USED TO INDICATE THAT THE TRACK IS OF SPECIAL INTEREST.
DATA STANDARD USAGE: Link 16		STATUS:
DUI NAME	EXPLANATION	APPLICABILITY
001 SPECIAL INTEREST INDICATOR [1 BIT] (SI IND)	THE SPECIAL INTEREST INDICATOR IS USED TO INDICATE THAT THE TRACK IS OF SPECIAL INTEREST.	J3.2I J3.3I J3.5I J7.0I J12.0C2 J12.6E0
DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
SPECIAL INTEREST	1	THE REFERENCE TN IS OF SPECIAL INTEREST. (A.) IF THIS FIELD IS SET TO ONE AND THE IDENTITY IS FRIEND THIS TRACK IS DEFINED AS A "KILO". (B.) IF THIS FIELD IS SET TO ONE AND THE TRACK ENVIRONMENT/CATEGORY IS AIR AND THE IDENTITY IS SUSPECT, THE TRACK IS DEFINED AS A "ZOMBIE". (C.) IF THIS FIELD IS SET TO ONE AND THE TRACK ENVIRONMENT/CATEGORY IS SURFACE (MARITIME) AND THE IDENTITY IS SUSPECT, THE TRACK IS DEFINED AS A "TRAVELLER". (D.) THE USE OF THIS INDICATOR WITH OTHER IDENTITIES IS YET TO BE DETERMINED.

DFI NAME
1862 CORRELATION INDICATOR

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 CORRELATION INDICATOR, TN/IN [1 BIT] (CI TI)	INDICATES WHETHER CORRELATION IS DONE BY THE C2 OR NONC2 UNIT.	J12.6E0
002 CORRELATION INDICATOR, A [1 BIT] (COR INA)	INDICATES WHETHER OR NOT THE ASSO- CIATED INDEX ORIGINATOR TN AND INDEX NUMBER ARE CORRELATED WITH THE OBJECTIVE TN.	J12.5I
003 CORRELATION INDICATOR, B [1 BIT] (COR INB)	INDICATES WHETHER OR NOT THE ASSO- CIATED INDEX ORIGINATOR TN AND INDEX NUMBER ARE CORRELATED WITH THE OBJECTIVE TN.	J12.5E0
004 CORRELATION INDICATOR, C [1 BIT] (COR INC)	INDICATES WHETHER OR NOT THE ASSO- CIATED INDEX ORIGINATOR TN AND INDEX NUMBER ARE CORRELATED WITH THE OBJECTIVE TN.	J12.5E0
005 CORRELATION INDICATOR, D [1 BIT] (COR IND)	INDICATES WHETHER OR NOT THE ASSO- CIATED INDEX ORIGINATOR TN AND INDEX NUMBER ARE CORRELATED WITH THE OBJECTIVE TN.	J12.5E0
006 CORRELATION INDICATOR, E [1 BIT] (COR INE)	INDICATES WHETHER OR NOT THE ASSO- CIATED INDEX ORIGINATOR TN AND INDEX NUMBER ARE CORRELATED WITH THE OBJECTIVE TN.	J12.5E1
007 CORRELATION INDICATOR, F [1 BIT] (COR INF)	INDICATES WHETHER OR NOT THE ASSO- CIATED INDEX ORIGINATOR TN AND INDEX NUMBER ARE CORRELATED WITH THE OBJECTIVE TN.	J12.5E1
008 CORRELATION INDICATOR, G [1 BIT] (COR ING)	INDICATES WHETHER OR NOT THE ASSO- CIATED INDEX ORIGINATOR TN AND INDEX NUMBER ARE CORRELATED WITH THE OBJECTIVE TN.	J12.5E1

DFI NAME
1862 CORRELATION INDICATOR

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
C2 DERIVED CORRELATION	0	CORRELATION BETWEEN TN AND IN HAS BEEN RECEIVED IN A J12.5 MESSAGE.
NONC2 DERIVED CORRELATION	1	CORRELATION BETWEEN TN AND IN HAS BEEN DERIVED FROM NONC2 ONBOARD CORRELATION PROCESSING ONLY.
----- FOR DUIS 002-008 -----		
DECORRELATED	0	
CORRELATED	1	

DFI	NAME	DEFINITION
1863	POINTER	

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
----------	-------------	---------------

001 POINTER [1 BIT] (PTR)	THIS FIELD PROVIDES THE ADDRESSEE TN WITH AN OPERATOR DISPLAY OF A REF- ERENCE POSITION OR TRACK.	J12.6C1
------------------------------	---	---------

DATA ITEM	BIT CODE	EXPLANATION
-----------	----------	-------------

----- FOR DUI 001 -----

NO STATEMENT	0	
DISPLAY	1	PROVIDES THE ADDRESSEE TN WITH AN OPERATOR DISPLAY OF A REFERENCE POSITION OR TRACK.

DFI NAME DEFINITION
1864 ORIGIN OF INDEX NUMBER

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 ORIGIN OF INDEX NUMBER [1 BIT] (ORG INX)		J12.0C1 J12.6I J17.0I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
MESSAGE ORIGINATOR'S INDEX NUMBER	0	
MESSAGE RECEIVER'S INDEX NUMBER	1	

DFI NAME DEFINITION
1865 AIRFIELD STATUS

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 AIRFIELD STATUS [1 BIT] (AFD STS)		J13.0I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NOT OPERATIONAL	0	
OPERATIONAL	1	

DFI NAME
1866 AIR RAID STATE

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 AIR RAID STATE [2 BIT] (ARD STE)		J13.0I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
WHITE	1	
YELLOW	2	
RED	3	

DFI NAME DEFINITION
1867 NUCLEAR/BIOLOGICAL/CHEMICAL
CONTAMINATION

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 NUCLEAR CONTAMINATION INDICATOR [1 BIT] (NUC IND)		J13.0I
002 BIOLOGICAL CONTAMINATION INDICATOR [1 BIT] (BIO IND)		J13.0I
003 CHEMICAL CONTAMINATION INDICATOR [1 BIT] (CHM IND)		J13.0I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001-003 -----		
NOT CONTAMINATED	0	
CONTAMINATED	1	

DFI NAME DEFINITION
1868 ICAO CODE

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME EXPLANATION APPLICABILITY

001 ICAO CODE J13.0E0
[20 BIT]

DATA ITEM BIT CODE EXPLANATION

----- FOR DUI 001 -----

AAAA THROUGH ZZZZ 0 THROUGH 1048575 THIS FIELD IS DIVIDED INTO FOUR FIVE
BIT GROUPS WITH CODING FOR EACH OF
THE FIVE BIT GROUPS AS FOLLOWS:

- 00000 = NO STATEMENT
- 00001 = A
- 00010 = B
- 00011 = C
- 00100 = D
- 00101 = E
- 00110 = F
- 00111 = G
- 01000 = H
- 01001 = I
- 01010 = J
- 01011 = K
- 01100 = L
- 01101 = M
- 01110 = N
- 01111 = O
- 10000 = P
- 10001 = Q
- 10010 = R
- 10011 = S
- 10100 = T
- 10101 = U
- 10110 = V
- 10111 = W
- 11000 = X
- 11001 = Y
- 11010 = Z
- 11011 THROUGH 11111 = ILLEGAL

DFI NAME DEFINITION
1869 BASE WEATHER STATE

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 BASE WEATHER STATE [3 BIT] (BW STE)		J13.0I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
RED	1	
AMBER	2	
YELLOW	3	
GREEN	4	
WHITE	5	
BLUE	6	
UNDEFINED	7	

DFI NAME
1870 AVAILABLE SUPPORT INDICATORS

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
002 CRASH SERVICE [3 BIT]		J13.0I
003 NITROGEN [1 BIT] (NIT)		J13.0C2
004 LIQUID OXYGEN [1 BIT] (LOX)		J13.0C2
005 AVTUR [1 BIT] (AV TUR)		J13.0C2

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 003-005 -----		
NOT AVAILABLE	0	
AVAILABLE	1	
----- FOR DUI 002 -----		
NO STATEMENT	0	
FULL	1	
LIMITED	2	
NONE	3	
UNDEFINED	4 THROUGH 7	

DFI NAME DEFINITION
1871 SHORADEZ

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 SHORADEZ [1 BIT] (SHR DEZ)		J13.0I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
INACTIVE	0	
ACTIVE	1	

DFI NAME
1872 MUNITIONS AVAILABILITY

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
002 AIM-9L AIR-TO-AIR MISSILE [1 BIT] (AIM 9L)		J13.0C2
006 SKY FLASH AIR-TO-AIR MISSILE [1 BIT] (SKY FLS)		J13.0C2
007 AMRAAM AIR-TO-AIR MISSILE [1 BIT] (AMR AAM)		J13.0C2
008 ASRAAM AIR-TO-AIR MISSILE [1 BIT] (ASR AAM)		J13.0C2
009 DURANDAL AIR-TO-SURFACE MISSILE [1 BIT] (DUR ASM)		J13.0C2
010 BAP 100 AIR-TO-SURFACE MISSILE [1 BIT] (BAP 100)		J13.0C2
011 TBD AIR-TO-SURFACE MISSILE [1 BIT] (ASM TBD)		J13.0C2
012 TBD AIR-TO-SURFACE MISSILE [1 BIT] (ASM TBD)		J13.0C2
013 TBD AIR-TO-SURFACE MISSILE [1 BIT] (ASM TBD)		J13.0C2
014 TBD AIR-TO-SURFACE MISSILE [1 BIT] (ASM TBD)		J13.0C2
015 ANTI-SUBMARINE DEPTH CHARGE [1 BIT] (DEP CH)		J13.0C2
016 NDB [1 BIT] (NDB)		J13.0C2
017 CONVENTIONAL 500 POUND BOMB [1 BIT] (500 BMB)		J13.0C2

DFI NAME
1872 MUNITIONS AVAILABILITY

DUI NAME	EXPLANATION	APPLICABILITY
018 CONVENTIONAL 1000 POUND BOMB [1 BIT] (100 BMB)		J13.0C2
019 20 MILLIMETER AMMUNITION [1 BIT] (20 MM)		J13.0C2
020 27 MILLIMETER AMMUNITION [1 BIT] (27 MM)		J13.0C2
021 30 MILLIMETER AMMUNITION [1 BIT] (30 MM)		J13.0C2
022 MAGIC I AIR-TO-AIR MISSILE [1 BIT] (MGC I)		J13.0C2
023 MAGIC II AIR-TO-AIR MISSILE [1 BIT] (MGC II)		J13.0C2
024 SUPER 530 AIR-TO-AIR MISSILE [1 BIT] (530)		J13.0C2
025 SUPER 530D AIR-TO-AIR MISSILE [1 BIT] (530 D)		J13.0C2
026 MICA AIR-TO-AIR MISSILE [1 BIT] (MIC AAM)		J13.0C2
027 AIM-9M AIR-TO-AIR MISSILE [1 BIT] (AIM 9M)		J13.0C2
028 AIM-9P AIR-TO-AIR MISSILE [1 BIT] (AIM 9P)		J13.0C2
029 TBD AIR-TO-AIR MISSILE [1 BIT] (AAM TBD)		J13.0C2
030 TBD AIR-TO-AIR MISSILE [1 BIT] (AAM TBD)		J13.0C2
031 TBD AIR-TO-AIR MISSILE [1 BIT] (AAM TBD)		J13.0C2

DFI NAME
1872 MUNITIONS AVAILABILITY

DUI	NAME	EXPLANATION	APPLICABILITY
032	TBD AIR-TO-AIR MISSILE [1 BIT] (AAM TBD)		J13.0C2

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 002, AND 006-032 -----		
NOT AVAILABLE	0	
AVAILABLE	1	

DFI NAME DEFINITION
 1873 RUNWAY/FLIGHT DECK EQUIPMENT DESCRIBES THE RUNWAY/FLIGHT DECK EQUIPMENT AVAILABLE.

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
003 ACTIVE RUNWAY GCA/FLIGHT DECK PAR [1 BIT] (AR GCA)		J13.0E0
005 ACTIVE RUNWAY APPROACH LIGHTING [3 BIT] (AR LIGHT)		J13.0E0
007 ACTIVE RUNWAY ILS/FLIGHT DECK PRECISION APPROACH AID (MADGE) [1 BIT] (AR ILS)		J13.0E0
009 ACTIVE RUNWAY ARRESTER BARRIER [1 BIT] (AR AB)		J13.0E0
011 ACTIVE RUNWAY ARRESTER WIRES [3 BIT] (AR WIRES)		J13.0E0
013 FLIGHT DECK GLIDE PATH INDICATOR [1 BIT] (FD GPI)		J13.0E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 005 -----		
NO STATEMENT	0	
NONE	1	
LIMITED/EMERGENCY	2	
3-BAR	3	
FULL NATO	4	
UNDEFINED	5 THROUGH 7	
----- FOR DUI 011 -----		
NO STATEMENT	0	
NOT AVAILABLE	1	
TOUCHDOWN WIRE RIGGED	2	
OVERRUN WIRE RIGGED	3	

DFI NAME
1873 RUNWAY/FLIGHT DECK EQUIPMENT

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
BOTH WIRES RIGGED	4	
UNDEFINED	5 THROUGH 7	
----- FOR DUIS 003, 007, 009, AND 013 -----		
NOT AVAILABLE	0	
AVAILABLE	1	

DFI NAME
1874 RUNWAY STATUS

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 ACTIVE RUNWAY STATUS [3 BIT]		J13.0E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
BLACK DUE TO UNSPECIFIED MAJOR DAMAGE	1	
CLEAR	2	
BLACK DUE TO STRONG CROSSWINDS	3	
BLACK DUE TO SNOW/ICE	4	
BLACK DUE TO CRASHED AIRCRAFT	5	
UNDEFINED	6 THROUGH 7	

DFI NAME DEFINITION
1875 RUNWAY AVAILABLE LENGTH

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 ACTIVE RUNWAY AVAILABLE LENGTH [6 BIT]		J13.0E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
0 THROUGH 6200 METERS NO STATEMENT	0 THROUGH 62 63	IN 100 METER INCREMENTS.

DFI NAME DEFINITION
1886 RUNWAY BRAKING ACTION EXPRESSES AN ESTIMATE OF RUNWAY BRAKING CONDITIONS.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 ACTIVE RUNWAY BRAKING ACTION [3 BIT] (AR BRKNG)	EXPRESSES ESTIMATED SURFACE FRICTION IN ACCORDANCE WITH THE ICAO SYSTEM AND STANAG 3634, FOR THE ACTIVE RUNWAY.	J13.0E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
POOR	1	
MEDIUM/POOR	2	
MEDIUM	3	
MEDIUM/GOOD	4	
GOOD	5	
UNDEFINED	6 THROUGH 7	

DFI NAME
1887 WIND SHEAR

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 WIND SHEAR INDICATOR [1 BIT] (WSI)	USED TO REPORT THE PRESENCE OF WIND SHEAR ON THE APPROACH TO THE ACTIVE RUNWAY OR FLIGHT DECK.	J13.0C1

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
WIND SHEAR REPORTED	1	

DFI NAME
1888 RUNWAY INDICATOR

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 SECONDARY RUNWAY INDICATOR [1 BIT] (SRI)	USED TO INDICATE WHETHER THE ACTIVE RUNWAY IS A SECONDARY RUNWAY.	J13.0I

DATA ITEM	BIT CODE	EXPLANATION
-----------	----------	-------------

----- FOR DUI 001 -----

NO STATEMENT	0	
SECONDARY RUNWAY	1	THE ACTIVE RUNWAY REPORTED IN THE J13.0E0 WORD IS A SECONDARY RUNWAY.

DFI NAME DEFINITION
1890 DIVE ANGLE EXPRESSES THE ANGULAR DIVE OF AIRCRAFT MEASURED FROM THE
HORIZONTAL. ABOVE HORIZONTAL ANGLES ARE POSITIVE. BELOW
HORIZONTAL ANGLES ARE NEGATIVE.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 DIVE ANGLE [8 BIT]	EXPRESSES THE ANGULAR DIVE OF AIRCRAFT MEASURED FROM THE HORIZONTAL. ABOVE HORIZONTAL ANGLES ARE POSITIVE. BELOW HORIZONTAL ANGLES ARE NEGATIVE.	J12.6C7

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NUMERIC	0 THROUGH 90	0 THROUGH 90 DEGREE IN ONE DEGREE INCREMENTS WITH LINEAR CODING.
NUMERIC	91 THROUGH 180	-1 THROUGH -90 DEGREE IN ONE DEGREE INCREMENTS WITH LINEAR CODING.
ILLEGAL	181 THROUGH 254	
NO STATEMENT	255	

B-924

MIL-STD-6016B
APPENDIX B

DFI NAME DEFINITION
1898 NUMBER OF AIRCRAFT

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 NUMBER OF AIRCRAFT [6 BIT]		J9.0E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
0 THROUGH 62 AIRCRAFT NO STATEMENT	0 THROUGH 62 63	

DFI	NAME	DEFINITION
1901	MISSION COMMANDER INDICATOR	INDICATES WHETHER THE AIRCRAFT IS A MISSION COMMANDER.

DATA STANDARD USAGE: Link 16	STATUS:
------------------------------	---------

DUI NAME	EXPLANATION	APPLICABILITY
001 MISSION COMMANDER INDICATOR [1 BIT] (MC IND)	INDICATES WHETHER OR NOT THE AIRCRAFT IS A MISSION COMMANDER.	J2.2I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NOT MISSION COMMANDER	0	
MISSION COMMANDER	1	

DFI NAME
1903 PULSE REPETITION INTERVAL

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 PULSE REPETITION INTERVAL [23 BIT]	THE INTERVAL OF TIME BETWEEN TWO TRANSMITTED PULSES OR PULSE GROUPS.	J14.0C4 J14.2C8

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
UNKNOWN/NO STATEMENT	0	
4 THROUGH 33,554,428 NANOSECONDS	1 THROUGH 8388607	PULSE REPETITION INTERVAL IN FOUR NANOSECOND INCREMENTS.

DFI NAME DEFINITION
1906 TRACKING MODIFIER SUPPLIES TRACKING DATA AS TO THE TRACKING METHODOLOGY.

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 TRACK IDENTIFIER [2 BIT] (TRK IFR)	SPECIFIES WHETHER THE TRACK BEING REPORTED IS EXTRAPOLATED OR REPORTED BY AN AUTOMATIC TRACKING ALGORITHM.	J3.5E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
E-TRACK	1	TRACKS EXTRAPOLATED ALONG A KNOWN ROUTE WITHOUT CONTINUED SENSOR CORRELATION, EXCEPT THAT THEY MAY BE MANUALLY CORRELATED WITH A SENSOR RETURN BY THE OPERATOR AT ANY TIME.
A-TRACK	2	TRACKS AUTOMATICALLY CORRELATED WITH EVERY SENSOR RETURN.
UNDEFINED	3	

B-928

MIL-STD-6016B
APPENDIX B

DFI NAME DEFINITION
1916 ROAD NUMBER

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 ROUTE NUMBER, 1 [10 BIT]	SPECIFIES THE IDENTIFYING NUMBER ASSIGNED TO ROADS, HIGHWAYS AND BYWAYS.	J3.5C3

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
NUMERIC	1 THROUGH 1023	

DFI NAME
1926 ID/STRENGTH INDICATOR

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
----------	-------------	---------------

001 ID/STRENGTH INDICATOR [2 BIT] (I/S IND)	INDICATES WHETHER THE IDENTITY AND STRENGTH ARE BASED ON A NONC2 JU REPORT OR A SURVEILLANCE TRACK REPORT.	J12.5I
--	---	--------

DATA ITEM	BIT CODE	EXPLANATION
-----------	----------	-------------

----- FOR DUI 001 -----

DO NOT INTERPRET THE EVALUATED IDENTITY AND EVALUATED STRENGTH FIELDS. FROM NONC2 JU REPORT	0	
	1	THE EVALUATED IDENTITY AND EVALUATED STRENGTH FIELDS ARE BASED ON THE IDENTITY AND STRENGTH REPORTED IN A PREVIOUS J12.6 MESSAGE.
FROM SURVEILLANCE TRACK REPORT	2	THE EVALUATED IDENTITY AND EVALUATED STRENGTH FIELDS ARE BASED ON A CORRELATED SURVEILLANCE TRACK REPORT.
UNDEFINED	3	

DFI NAME
1933 JAMMER TYPE

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 JAMMER TYPE [3 BIT]	SPECIFIES THE TYPE OF JAMMER BEING ENCOUNTERED. MAY BE USED IN CONJUNCTION WITH SENSOR TYPE.	J12.6C2 J12.7I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
VELOCITY DECEPTION	1	
RANGE DECEPTION	2	
NOISE JAMMING	3	
ANGLE DECEPTION	4	
UNDEFINED	5 THROUGH 7	

DFI NAME DEFINITION
1934 RECCE/EW SYSTEM TYPE

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 RECCE SYSTEM TYPE [3 BIT]	INDICATES TYPE OF RECONNAISSANCE SYSTEM.	J13.2C6
002 DEFENSIVE JAMMER SYSTEM 1 TYPE [3 BIT]	INDICATES TYPE OF DEFENSIVE JAMMER 1.	J13.2C6
003 DEFENSIVE JAMMER SYSTEM 2 TYPE [3 BIT]	INDICATES TYPE OF DEFENSIVE JAMMER 2.	J13.2C6

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
ELECTRO-OPTICAL	1	
IR/EO	2	
RF PASSIVE	3	
SAR	4	
ISAR	5	
UNDEFINED	6 THROUGH 7	

----- FOR DUIS 002 AND 003 -----		
NO STATEMENT	0	
INTERNAL RF	1	
EXTERNAL RF	2	
UNDEFINED	3 THROUGH 7	

DFI NAME
1936 DISSEMINATION MODE INDICATOR

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 DISSEMINATION MODE INDICATOR, OWN [1 BIT] (MIO)	INDICATES WHETHER THE ORIGINATING JU IS USING TABLE MODE OR TRACK NUMBER MODE TO REPORT ITS OWN DEMAND INFORMATION. IN TABLE MODE JUS ARE IDENTIFIED BY A PREDEFINED TABLE POSITION NUMBER. IN TRACK NUMBER MODE THEY ARE REFERENCED BY SOURCE TRACK NUMBER.	J0.7I
002 DISSEMINATION MODE INDICATOR, A [1 BIT] (MIA)	INDICATES WHETHER THE REPORTED JU IS USING TABLE MODE OR TRACK NUMBER MODE TO REPORT ITS OWN DEMAND INFORMATION. IN TABLE MODE JUS ARE IDENTIFIED BY A PREDEFINED TABLE POSITION NUMBER. IN TRACK NUMBER MODE THEY ARE REFERENCED BY SOURCE TRACK NUMBER.	J0.7I
003 DISSEMINATION MODE INDICATOR, WORD [1 BIT] (MIW)	INDICATES WHETHER JUS REPORTED IN THE J0.7E0 WORD ARE ALL USING TABLE MODE OR TRACK NUMBER MODE TO REPORT THEIR OWN DEMAND INFORMATION. IN TABLE MODE JUS ARE IDENTIFIED BY A PREDEFINED TABLE POSITION NUMBER. IN TRACK NUMBER MODE THEY ARE REFERENCED BY SOURCE TRACK NUMBER.	J0.7E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001 AND 002 -----		
TABLE MODE	0	THE SPECIFIED JU IS USING TABLE MODE.
STN MODE	1	THE SPECIFIED JU IS USING TRACK NUMBER MODE.

DFI NAME
1936 DISSEMINATION MODE INDICATOR

DATA ITEM (CONTINUED) ----- FOR DUI 003 -----	BIT CODE	EXPLANATION
TABLE MODE	0	THE REPORTED JUS ARE USING TABLE MODE.
STN MODE	1	THE REPORTED JUS ARE USING TRACK NUMBER MODE.

DFI NAME
1943 RADAR PRF

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 RADAR PRF [3 BIT]	SPECIFIES THE RADAR PRF SELECTED. MAY BE USED IN CONJUNCTION WITH SENSOR TYPE AND JAMMER TYPE.	J12.6C6

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
LOW (>0, <4.0 KHZ)	1	
MEDIUM (>=4.0 KHZ <20 KHZ)	2	
HIGH (>=20 KHZ, <300 KHZ)	3	
MISSILE COMPATIBLE (>=300 KHZ)	4	
UNDEFINED	5 THROUGH 7	

DFI NAME
1946 TABLE ENTRY

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 TABLE POSITION NUMBER, OWN [7 BIT]	IF THE JU IS USING TABLE MODE THIS FIELD GIVES ITS TABLE POSITION NUMBER.	J0.7I
002 TABLE POSITION NUMBER, A [7 BIT]	IF THE JU IS USING TABLE MODE THIS FIELD GIVES ITS TABLE POSITION NUMBER.	J0.7I
003 TABLE SEGMENT [5 BIT]	IN TABLE MODE INDICATES THE TABLE SEGMENT CONTAINING THE REPORTED DEMANDS. THE TSR TABLE CONTAINS 32 SEGMENTS OF 4 ENTRIES EACH. THIS FIELD IDENTIFIES WHICH SEGMENT OF THE TABLE IS REPORTED IN THIS WORD. E.G. FOR TABLE SEGMENT = 2 DEMAND, B CORRESPONDS TO TABLE POSITION NUMBER 8, DEMAND, C CORRESPONDS TO TABLE POSITION NUMBER 9 AND SO ON.	J0.7E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001 AND 002 -----		
NUMERIC	0 THROUGH 127	TABLE ENTRY NUMBER.
----- FOR DUI 003 -----		
TABLE POSITION NUMBERS 0-3	0	
TABLE POSITION NUMBERS 4-7	1	
TABLE POSITION NUMBERS 8-11	2	
TABLE POSITION NUMBERS 12-15	3	
TABLE POSITION NUMBERS 16-19	4	

DFI NAME
1946 TABLE ENTRY

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
TABLE POSITION NUMBERS 20-23	5	
TABLE POSITION NUMBERS 24-27	6	
TABLE POSITION NUMBERS 28-31	7	
TABLE POSITION NUMBERS 32-35	8	
TABLE POSITION NUMBERS 36-39	9	
TABLE POSITION NUMBERS 40-43	10	
TABLE POSITION NUMBERS 44-47	11	
TABLE POSITION NUMBERS 48-51	12	
TABLE POSITION NUMBERS 52-55	13	
TABLE POSITION NUMBERS 56-59	14	
TABLE POSITION NUMBERS 60-63	15	
TABLE POSITION NUMBERS 64-67	16	
TABLE POSITION NUMBERS 68-71	17	
TABLE POSITION NUMBERS 72-75	18	
TABLE POSITION NUMBERS 76-79	19	
TABLE POSITION NUMBERS 80-83	20	
TABLE POSITION NUMBERS 84-87	21	
TABLE POSITION NUMBERS 88-91	22	
TABLE POSITION NUMBERS 92-95	23	
TABLE POSITION NUMBERS 96-99	24	

B-937

MIL-STD-6016B
APPENDIX B

DFI NAME
1946 TABLE ENTRY

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
TABLE POSITION NUMBERS 100-103	25	
TABLE POSITION NUMBERS 104-107	26	
TABLE POSITION NUMBERS 108-111	27	
TABLE POSITION NUMBERS 112-115	28	
TABLE POSITION NUMBERS 116-119	29	
TABLE POSITION NUMBERS 120-123	30	
TABLE POSITION NUMBERS 124-127	31	

DFI NAME DEFINITION
1953 SENSOR TYPE

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 SENSOR TYPE [4 BIT]	IDENTIFIES THE TYPE OF SENSOR USED TO DETECT THE TARGET.	J12.6C2 J12.7I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
TELEVISION	1	
INFRARED	2	
ELECTRONIC WARFARE	3	
SUPPORT		
JAM STROBE	4	
VISUAL	5	
RADAR	6	
ANTI RADIATION MISSILE	7	
(ARM)		
LASER DETECTOR/TRACKER	8	
RADAR WARNING RECEIVER	9	
SENSOR FUSION DATA	10	
(SENSOR NOT STATED)		
PASSIVE RADAR	11	
UNDEFINED	12 THROUGH 15	

B-939

MIL-STD-6016B
APPENDIX B

DFI NAME
1956 DEMAND

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 DEMAND, OWN [5 BIT]	INDICATES THE NUMBER OF TIME SLOTS REQUIRED BY THE ORIGINATING JU IN THE NEXT REALLOCATION PERIOD AS A PERCENTAGE OF THE REALLOCATION POOL. IF THE REALLOCATION POOL SIZE IS P AND THE PERCENTAGE OF THE REALLOCATION POOL REQUIRED IS F THEN THE NUMBER OF TIME SLOTS REQUIRED IS THE SMALLEST INTEGER NOT LESS THAN THE PRODUCT OF F AND P DIVIDED BY 100.	J0.7I
002 DEMAND, A [5 BIT]	INDICATES THE NUMBER OF TIME SLOTS REQUIRED BY THE REPORTED JU IN THE NEXT REALLOCATION PERIOD AS A PERCENTAGE OF THE REALLOCATION POOL. IF THE REALLOCATION POOL SIZE IS P AND THE PERCENTAGE OF THE REALLOCATION POOL REQUIRED IS F THEN THE NUMBER OF TIME SLOTS REQUIRED IS THE SMALLEST INTEGER NOT LESS THAN THE PRODUCT OF F AND P DIVIDED BY 100.	J0.7I
003 DEMAND, B [5 BIT]	INDICATES THE NUMBER OF TIME SLOTS REQUIRED BY THE REPORTED JU IN THE NEXT REALLOCATION PERIOD AS A PERCENTAGE OF THE REALLOCATION POOL. IF THE REALLOCATION POOL SIZE IS P AND THE PERCENTAGE OF THE REALLOCATION POOL REQUIRED IS F THEN THE NUMBER OF TIME SLOTS REQUIRED IS THE SMALLEST INTEGER NOT LESS THAN THE PRODUCT OF F AND P DIVIDED BY 100.	J0.7E0
004 DEMAND, C [5 BIT]	INDICATES THE NUMBER OF TIME SLOTS REQUIRED BY THE REPORTED JU IN THE NEXT REALLOCATION PERIOD AS A	J0.7E0

APPENDIX B

DFI NAME
1956 DEMAND

DUI NAME	EXPLANATION	APPLICABILITY
004 (CONTINUED)	PERCENTAGE OF THE REALLOCATION POOL. IF THE REALLOCATION POOL SIZE IS P AND THE PERCENTAGE OF THE REALLOCATION POOL REQUIRED IS F THEN THE NUMBER OF TIME SLOTS REQUIRED IS THE SMALLEST INTEGER NOT LESS THAN THE PRODUCT OF F AND P DIVIDED BY 100.	
005 DEMAND, D [5 BIT]	INDICATES THE NUMBER OF TIME SLOTS REQUIRED BY THE REPORTED JU IN THE NEXT REALLOCATION PERIOD AS A PERCENTAGE OF THE REALLOCATION POOL. IF THE REALLOCATION POOL SIZE IS P AND THE PERCENTAGE OF THE REALLOCATION POOL REQUIRED IS F THEN THE NUMBER OF TIME SLOTS REQUIRED IS THE SMALLEST INTEGER NOT LESS THAN THE PRODUCT OF F AND P DIVIDED BY 100.	J0.7E0
006 DEMAND, E [5 BIT]	INDICATES THE NUMBER OF TIME SLOTS REQUIRED BY THE REPORTED JU IN THE NEXT REALLOCATION PERIOD AS A PERCENTAGE OF THE REALLOCATION POOL. IF THE REALLOCATION POOL SIZE IS P AND THE PERCENTAGE OF THE REALLOCATION POOL REQUIRED IS F THEN THE NUMBER OF TIME SLOTS REQUIRED IS THE SMALLEST INTEGER NOT LESS THAN THE PRODUCT OF F AND P DIVIDED BY 100.	J0.7E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001-006 -----		
0.0% OF POOL REQUIRED	0	
0.2% OF POOL REQUIRED	1	
0.4% OF POOL REQUIRED	2	
0.6% OF POOL REQUIRED	3	

DFI NAME
1956 DEMAND

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
0.8% OF POOL REQUIRED	4	
1.0% OF POOL REQUIRED	5	
1.2% OF POOL REQUIRED	6	
1.4% OF POOL REQUIRED	7	
1.6% OF POOL REQUIRED	8	
1.8% OF POOL REQUIRED	9	
2.0% OF POOL REQUIRED	10	
2.2% OF POOL REQUIRED	11	
2.4% OF POOL REQUIRED	12	
2.6% OF POOL REQUIRED	13	
2.8% OF POOL REQUIRED	14	
3.0% OF POOL REQUIRED	15	
4.0% OF POOL REQUIRED	16	
5.0% OF POOL REQUIRED	17	
6.0% OF POOL REQUIRED	18	
7.0% OF POOL REQUIRED	19	
8.0% OF POOL REQUIRED	20	
10.0% OF POOL REQUIRED	21	
12.0% OF POOL REQUIRED	22	
15.0% OF POOL REQUIRED	23	
18.0% OF POOL REQUIRED	24	
22.0% OF POOL REQUIRED	25	
27.0% OF POOL REQUIRED	26	
33.0% OF POOL REQUIRED	27	
40.0% OF POOL REQUIRED	28	
50.0% OF POOL REQUIRED	29	
60.0% OF POOL REQUIRED	30	
NO STATEMENT	31	IGNORE THIS DEMAND.

B-942

DFI NAME
1963 FREQUENCY EXPONENT

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
----------	-------------	---------------

001 FREQUENCY EXPONENT [4 BIT]	EXPRESSED AS 10 TO THE NTH POWER WHERE "N" IS THE FREQUENCY EXPONENT VALUE. 10 TO THE NTH POWER IS MULTIPLIED BY THE FREQUENCY INTERCEPT FIELD TO DETERMINE THE FREQUENCY. WHEN THE FREQUENCY INTERCEPT FIELD IS SET TO VALUE 0, THIS FIELD IS NOT INTERPRETED.	J12.7E0
-----------------------------------	---	---------

DATA ITEM	BIT CODE	EXPLANATION
-----------	----------	-------------

----- FOR DUI 001 ----- EXPONENT VALUE 0 THROUGH 15	0 THROUGH 15	
---	--------------	--

DFI NAME
1966 RECEIVE COUNT

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 RECEIVE COUNT, OWN [3 BIT]	THE NUMBER OF TSR PARTICIPANTS THE ORIGINATING JU HAS RECEIVED DEMAND DATA FROM IN THIS REALLOCATION POOL.	J0.7I
002 RECEIVE COUNT, A [3 BIT]	THE NUMBER OF TSR PARTICIPANTS THE REPORTED JU HAS RECEIVED DEMAND DATA FROM IN THIS REALLOCATION POOL.	J0.7I
003 RECEIVE COUNT, B [3 BIT]	THE NUMBER OF TSR PARTICIPANTS THE REPORTED JU HAS RECEIVED DEMAND DATA FROM IN THIS REALLOCATION POOL.	J0.7E0
004 RECEIVE COUNT, C [3 BIT]	THE NUMBER OF TSR PARTICIPANTS THE REPORTED JU HAS RECEIVED DEMAND DATA FROM IN THIS REALLOCATION POOL.	J0.7E0
005 RECEIVE COUNT, D [3 BIT]	THE NUMBER OF TSR PARTICIPANTS THE REPORTED JU HAS RECEIVED DEMAND DATA FROM IN THIS REALLOCATION POOL.	J0.7E0
006 RECEIVE COUNT, E [3 BIT]	THE NUMBER OF TSR PARTICIPANTS THE REPORTED JU HAS RECEIVED DEMAND DATA FROM IN THIS REALLOCATION POOL.	J0.7E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS FOR 001-006 -----		
0 DEMANDS RECEIVED	0	
1 DEMAND RECEIVED	1	
2 DEMANDS RECEIVED	2	
3 DEMANDS RECEIVED	3	
4-7 DEMANDS RECEIVED	4	

DFI NAME
1966 RECEIVE COUNT

DATA ITEM (CONTINUED)	BIT CODE	EXPLANATION
8-15 DEMANDS RECEIVED	5	
16-31 DEMANDS RECEIVED	6	
32 OR MORE DEMANDS RECEIVED	7	

DFI NAME
1973 LAUNCH CAPABILITY

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 LAUNCH CAPABILITY [2 BIT] (LCH CAP)	INDICATES WHETHER A SUBMARINE MUST BE SURFACED TO LAUNCH ITS MISSILES.	J3.4I

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUI 001 -----		
NO STATEMENT	0	
MAY LAUNCH MISSILE WHILE SUBMERGED	1	
MUST BE SURFACED TO LAUNCH MISSILE	2	
UNDEFINED	3	

DFI NAME DEFINITION
1976 HOP COUNT

DATA STANDARD USAGE: Link 16 STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 HOP COUNT, A [3 BIT]	A COUNT OF THE NUMBER OF TIMES THE DEMAND FROM THE ORIGINATOR (A) HAS BEEN REPEATED BY DIFFERENT JUS.	J0.7I
002 HOP COUNT, B [3 BIT]	A COUNT OF THE NUMBER OF TIMES THE DEMAND FROM THE ORIGINATOR (B) HAS BEEN REPEATED BY DIFFERENT JUS.	J0.7E0
003 HOP COUNT, C [3 BIT]	A COUNT OF THE NUMBER OF TIMES THE DEMAND FROM THE ORIGINATOR (C) HAS BEEN REPEATED BY DIFFERENT JUS.	J0.7E0
004 HOP COUNT, D [3 BIT]	A COUNT OF THE NUMBER OF TIMES THE DEMAND FROM THE ORIGINATOR (D) HAS BEEN REPEATED BY DIFFERENT JUS.	J0.7E0
005 HOP COUNT, E [3 BIT]	A COUNT OF THE NUMBER OF TIMES THE DEMAND FROM THE ORIGINATOR (E) HAS BEEN REPEATED BY DIFFERENT JUS.	J0.7E0

DATA ITEM	BIT CODE	EXPLANATION
----- FOR DUIS 001-005 -----		
NO HOPS	0	
1 HOP	1	
2 HOPS	2	
3 HOPS	3	
4 HOPS	4	
5 HOPS	5	
6 HOPS	6	
7 OR MORE HOPS	7	

APPENDIX B

DFI NAME
1986 TIME TAG

DEFINITION

DATA STANDARD USAGE: Link 16

STATUS:

DUI NAME	EXPLANATION	APPLICABILITY
001 TIME TAG, A [3 BIT]	THE NUMBER OF REALLOCATION PERIODS THAT HAVE BEGUN SINCE THE DEMAND INFORMATION WAS FIRST TRANSMITTED IN A J0.7I BY THE ORIGINATOR.	J0.7I
002 TIME TAG, B [3 BIT]	THE NUMBER OF REALLOCATION PERIODS THAT HAVE BEGUN SINCE THE DEMAND INFORMATION WAS FIRST TRANSMITTED IN A J0.7I BY THE ORIGINATOR.	J0.7E0
003 TIME TAG, C [3 BIT]	THE NUMBER OF REALLOCATION PERIODS THAT HAVE BEGUN SINCE THE DEMAND INFORMATION WAS FIRST TRANSMITTED IN A J0.7I BY THE ORIGINATOR.	J0.7E0
004 TIME TAG, D [3 BIT]	THE NUMBER OF REALLOCATION PERIODS THAT HAVE BEGUN SINCE THE DEMAND INFORMATION WAS FIRST TRANSMITTED IN A J0.7I BY THE ORIGINATOR.	J0.7E0
005 TIME TAG, E [3 BIT]	THE NUMBER OF REALLOCATION PERIODS THAT HAVE BEGUN SINCE THE DEMAND INFORMATION WAS FIRST TRANSMITTED IN A J0.7I BY THE ORIGINATOR.	J0.7E0

DATA ITEM

BIT CODE

EXPLANATION

----- FOR DUIS 001-005 -----

NUMERIC

0 THROUGH 7

THE NUMBER OF REALLOCATION PERIODS.

INCH-POUND

MIL-STD-6016B
1 August 2002
Superseding
MIL-STD-6016A
30 April 1999

DEPARTMENT OF DEFENSE INTERFACE STANDARD

TACTICAL DATA LINK (TDL) 16 MESSAGE STANDARD

APPENDIX C - DATA FORWARDING



AMSC N/A

AREA: INST

DISTRIBUTION STATEMENT D: Distribution authorized to DOD and U.S. DOD contractors for administrative or operational use. Other requests for this document shall be forwarded to Defense Information Systems Agency (DISA/IN5). See distribution warning on page iii.

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B
APPENDIX C
DISTRIBUTION WARNING

WARNING - This document contains technical data whose export is restricted by the Arms Export Control Act (Title 22, U.S.C., Sec. 2751 et seq.) or Executive Order 12470. Violations of these export laws are subject to severe criminal penalties. Disseminate in accordance with provisions of DOD Directive 5230.25.

THIS PAGE INTENTIONALLY LEFT BLANK

MIL-STD-6016B

APPENDIX C

TABLE OF CONTENTS

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
C.1	Scope.....	C-1
C.2	Applicable Documents.....	C-1
C.2.1	General.....	C-1
C.2.2	Government Documents.....	C-1
C.2.2.1	Specifications, Standards, and Handbooks.....	C-1
C.3	Definitions.....	C-3
C.4	General Requirements.....	C-5
C.4.1	Data Forwarding Rules.....	C-5
C.4.1.1	Forwarding Requirements.....	C-6
C.4.1.2	Forwarding Considerations.....	C-6
C.4.1.3	Concurrent Operations.....	C-6
C.4.2	Data Forwarding Process.....	C-6
C.4.2.1	Message Translation.....	C-7
C.4.2.2	Data Element Translation.....	C-7
C.4.2.2.1	Data Element Equivalence.....	C-7
C.4.2.2.2	Data Element Conversion.....	C-8
C.4.2.2.3	Special Considerations.....	C-8
C.4.3	General Forwarding Rules.....	C-8
C.4.4	Active/Inactive Status.....	C-11
C.4.4.1	Link 11 to Link 16 Active Unit Indication.....	C-11
C.4.4.2	Link 11B to Link 16 Active Unit Indication.....	C-12
C.4.4.3	Link 16 to Link 11 Active Unit Indication.....	C-12
C.4.4.4	Link 16 to Link 11B Active Unit Indication.....	C-12
C.4.4.5	Link 11 to Link 16 Inactive Unit Indication.....	C-13
C.4.4.6	Link 11B to Link 16 Inactive Unit Indication.....	C-13
C.4.4.7	Link 16 to Link 11/11B Inactive Unit Indication.....	C-13
C.4.5	TDL Unique Forwarding Rules.....	C-14
C.4.5.1	Forwarding of Data on Link 16.....	C-14
C.4.5.2	Forwarding of Data on Link 11.....	C-14
C.4.5.3	Forwarding of Data on Link 11B.....	C-14
C.4.6	Data Forwarding of Information Requiring Special Processing...	C-15
C.4.6.1	Data Forwarding of Information Requiring Special Processing to Link 11B.....	C-15
C.4.6.2	Data Forwarding of Information Requiring Special Processing to Link 11.....	C-15
C.4.6.3	Data Forwarding of Information Requiring Special Processing to Link 16.....	C-15

MIL-STD-6016B

APPENDIX C

TABLE OF CONTENTS (continued)

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
C.4.7	Precise Participant Location and Identification	
	Data Forwarding.....	C-16
C.4.7.1	NonC ² JU Data Forwarding	C-16
C.4.7.2	C ² JU Data Forwarding	C-17
C.4.8	Data Forwarding Management.....	C-17
C.4.8.1	Surveillance Data Forwarding.....	C-17
C.4.8.2	Forwarding Controlling Unit Data.....	C-18
C.4.8.2.1	Link 16 to Link 11/11B.....	C-18
C.4.8.2.2	Link 11/11B to Link 16.....	C-18
C.4.8.3	Forwarding IFF/SIF Information.....	C-19
C.4.8.3.1	Forwarding IFF/SIF Surveillance Information.....	C-19
C.4.8.3.2	Forwarding IFF/SIF Management Information.....	C-19
C.4.8.3.3	Forwarding Special Code Information.....	C-19
C.4.8.4	Forwarding Addressed Messages Having Receipt/Compliance.....	C-19
C.4.8.5	Electronic Warfare Data Forwarding.....	C-47
C.4.8.6	Forwarding Simulated Data.....	C-48
C.4.8.6.1	Link 16 to Link 11.....	C-48
C.4.8.6.2	Link 16 to Link 11B.....	C-48
C.4.8.6.3	Link 11/11B to Link 16.....	C-48
C.4.8.6.4	FJU Simulation Filter.....	C-49
C.4.9	Message and Word Numbering Conventions.....	C-49
C.4.9.1	Link 16 (J-series).....	C-49
C.4.9.1.1	Message.....	C-49
C.4.9.1.2	Basic Message.....	C-49
C.4.9.1.3	Initial Word.....	C-50
C.4.9.1.4	Extension Word.....	C-50
C.4.9.1.5	Continuation Word.....	C-50
C.4.9.1.6	Link 16 Message Labeling Scheme.....	C-50
C.4.9.2	Link 11/11B (M-series).....	C-50
C.4.9.2.1	Message.....	C-51
C.5	Detailed Requirements.....	C-57
C.5.1	Message Translation Requirements.....	C-57
C.5.1.1	General.....	C-57
C.5.1.2	Detailed Description of Contents.....	C-57
C.5.1.2.1	Message Translation Trees	C-58
C.5.1.2.1.1	Basic Translation Criteria.....	C-58
C.5.1.2.1.2	Test Node Diagram and Conditions.....	C-58

MIL-STD-6016B

APPENDIX C

TABLE OF CONTENTS (continued)

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
C.5.1.2.1.3	Required Actions.....	C-59
C.5.1.2.1.4	Notes.....	C-59
C.5.1.2.2	Related Messages.....	C-59
C.5.1.2.3	Forwarding Transmit Requirements.....	C-60
C.5.1.2.4	Data Retention Rules.....	C-60
C.5.1.2.4.1	General Retention Rules.....	C-60
C.5.1.2.4.2	Minimum Retention Times.....	C-61
C.5.1.3	Technically Illegal/Invalid Message/Message Sequence Determination.....	C-62
C.5.1.3.1	General.....	C-62
C.5.1.3.2	Technically Illegal/Invalid Examples.....	C-63
C.5.2	Data Element Translation.....	C-359
C.5.2.1	General.....	C-359
C.5.2.2	Detailed Description of Contents.....	C-359
C.5.2.2.1	Data Element Translation Tables.....	C-359
C.5.2.2.1.1	Link 16 Data Element Translation Tables.....	C-359
C.5.2.2.1.2	Link 11/11B Data Element Translation Tables.....	C-360
C.5.2.2.2	Data Element Translation Table Entries.....	C-361
C.5.2.3	Default Conditions.....	C-362
C.5.3	General Notes for Message Data Element Translation.....	C-879
GENERAL NOTE 1	Header Information.....	C-880
GENERAL NOTE 2	Data Source Determination.....	C-880
GENERAL NOTE 3	Message Length Indicator.....	C-881
GENERAL NOTE 4	Emergency/Force Tell Indicators.....	C-881
GENERAL NOTE 5	Special Processing Indicator.....	C-881
GENERAL NOTE 6	Simulation Indicator.....	C-882
GENERAL NOTE 7	Course and Speed to X Dot and Y Dot.....	C-883
GENERAL NOTE 8	X Dot and Y Dot to Course and Speed.....	C-883
GENERAL NOTE 9	Latitude/Longitude.....	C-883
GENERAL NOTE 10	Altitude, Elevation, and Height.....	C-883
GENERAL NOTE 10.1	Altitude, Elevation, and Height Translations.....	C-885
GENERAL NOTE 11	Depth.....	C-887
GENERAL NOTE 12	PU/RU Address/Track Number, Source.....	C-887
GENERAL NOTE 13	Track Number.....	C-887
GENERAL NOTE 14	Not Used.....	C-888
GENERAL NOTE 15	Value Equivalence.....	C-888
GENERAL NOTE 16	Not Used.....	C-888

MIL-STD-6016B

APPENDIX C

TABLE OF CONTENTS (continued)

GENERAL NOTE 17	Axis Orientation/Bearing.....	C-888
GENERAL NOTE 18	Area Minor Axis and Area Major Axis.....	C-889
GENERAL NOTE 19	Frequency Conversion.....	C-891
GENERAL NOTE 20	Air Identity Translations.....	C-895
GENERAL NOTE 20.1	Link 16 Identity Versus Link 11/11B Identity and Primary Identity Amplification Equivalence.....	C-897
GENERAL NOTE 20.2	Air Identity Translation Special Cases.....	C-899
GENERAL NOTE 20.3	Air Identity Translation.....	C-901
GENERAL NOTE 21	Surface Identity Translation.....	C-917
GENERAL NOTE 21.1	Link 16 Identity Versus Link 11/11B Identity and Primary Identity Amplification Equivalence.....	C-919
GENERAL NOTE 21.2	Surface (Maritime) Translation Special Cases.....	C-921
GENERAL NOTE 21.3	Surface (Maritime) Identity Translation.....	C-923

LIST OF TABLES

<u>Table</u>	<u>Page</u>
Table C.4.8-1	Command Message Transmission Sequence Link 16 to Link 11...C-23
Table C.4.8-2	Command Message Transmission Sequence Link 16 to Link 11B.....C-25
Table C.4.8-3	Command Message Transmission Sequence Link 11 to Link 16...C-27
Table C.4.8-4	Command Message Transmission Sequence Link 11B to Link 16.....C-29
Table C.4.8-5	Handover Message Transmission Sequence Link 16 to Link 11.....C-31
Table C.4.8-6	Handover Message Transmission Sequence Link 16 to Link 11B.....C-35
Table C.4.8-7	Handover Message Transmission Sequence Link 11B to Link 16.....C-39
Table C.4.8-8	Handover Message Transmission Sequence Link 11 to Link 16.....C-43
Table C.4.9-1	JTIDS/MIDS Messages.....C-53
Table C.4.9-2	Link 11/11B Messages.....C-55
Table C.5.1-Jx	J-Series to Link 11/11B Message Translation Tree.....C-65
Table C.5.1-J2.0	J2.0 to Link 11/11B Message Translation Tree.....C-67
Table C.5.1-J2.2	J2.2 to Link 11/11B Message Translation Tree.....C-73
Table C.5.1-J2.3	J2.3 to Link 11/11B Message Translation Tree.....C-81
Table C.5.1-J2.4	J2.4 to Link 11/11B Message Translation Tree.....C-89
Table C.5.1-J2.5	J2.5 to Link 11/11B Message Translation Tree.....C-97
Table C.5.1-J2.6	J2.6 to Link 11/11B Message Translation Tree.....C-105
Table C.5.1-J3.0	J3.0 to Link 11/11B Message Translation Tree.....C-113
Table C.5.1-J3.1	J3.1 to Link 11/11B Message Translation Tree.....C-121

MIL-STD-6016B

APPENDIX C

LIST OF TABLES (continued)

<u>Table</u>	<u>Page</u>
Table C.5.1-J3.2 J3.2 to Link 11/11B Message Translation Tree.....	C-125
Table C.5.1-J3.3 J3.3 to Link 11/11B Message Translation Tree.....	C-131
Table C.5.1-J3.4 J3.4 to Link 11/11B Message Translation Tree.....	C-137
Table C.5.1-J3.5 J3.5 to Link 11/11B Message Translation Tree.....	C-143
Table C.5.1-J3.6 J3.6 to Link 11/11B Message Translation Tree.....	C-149
Table C.5.1-J3.7 J3.7 to Link 11/11B Message Translation Tree.....	C-153
Table C.5.1-J5.4 J5.4 to Link 11 Message Translation Tree.....	C-159
Table C.5.1-J6.0 J6.0 to Link 11/11B Message Translation Tree.....	C-165
Table C.5.1-J7.0 J7.0 to Link 11/11B Message Translation Tree.....	C-169
Table C.5.1-J7.1 J7.1 to Link 11/11B Message Translation Tree.....	C-173
Table C.5.1-J7.2 J7.2 to Link 11/11B Message Translation Tree.....	C-177
Table C.5.1-J7.3 J7.3 to Link 11/11B Message Translation Tree.....	C-181
Table C.5.1-J7.4 J7.4 to Link 11/11B Message Translation Tree.....	C-185
Table C.5.1-J7.5 J7.5 to Link 11/11B Message Translation Tree.....	C-189
Table C.5.1-J7.7 J7.7 to Link 11/11B Message Translation Tree.....	C-193
Table C.5.1-J9.0 J9.0 to Link 11/11B Message Translation Tree.....	C-197
Table C.5.1-J10.2 J10.2 to Link 11/11B Message Translation Tree.....	C-203
Table C.5.1-J10.3 J10.3 to Link 11/11B Message Translation Tree.....	C-207
Table C.5.1-J10.5 J10.5 to Link 11/11B Message Translation Tree.....	C-213
Table C.5.1-J10.6 J10.6 to Link 11/11B Message Translation Tree.....	C-217
Table C.5.1-J13.2 J13.2 to Link 11/11B Message Translation Tree.....	C-221
Table C.5.1-J13.3 J13.3 to Link 11/11B Message Translation Tree.....	C-227
Table C.5.1-J13.4 J13.4 to Link 11/11B Message Translation Tree.....	C-231
Table C.5.1-J13.5 J13.5 to Link 11/11B Message Translation Tree.....	C-235
Table C.5.1-J14.0 J14.0 to Link 11/11B Message Translation Tree.....	C-239
Table C.5.1-J14.2 J14.2 to Link 11/11B Message Translation Tree.....	C-245
Table C.5.1-M.x M-Series to Link 16 Message Translation Tree.....	C-251
Table C.5.1-M.1 M.1/M.81/M.11D to Link 16 Message Translation Tree.....	C-253
Table C.5.1-M.2 M.2/M.82/M.11D to Link 16 Message Translation Tree.....	C-257
Table C.5.1-M.3 M.3/M.83/M.11D to Link 16 Message Translation Tree.....	C-261
Table C.5.1-M.4A M.4A/M.84A/M.4B/M.11D to Link 16 Message Translation Tree.....	C-265
Table C.5.1-M.4B M.4B to Link 16 Message Translation Tree.....	C-269
Table C.5.1-M.4C M.4C/M.84C/M.4B to Link 16 Message Translation Tree....	C-273
Table C.5.1-M.4D M.4D/M.84D/M.4B to Link 16 Message Translation Tree....	C-277
Table C.5.1-M.5 M.5/M.85/M.11D to Link 16 Message Translation Tree.....	C-281
Table C.5.1-M.6A M.6A to Link 16 Message Translation Tree.....	C-285

MIL-STD-6016B

APPENDIX C

LIST OF TABLES (continued)

<u>Table</u>	<u>Page</u>
Table C.5.1-M.6B M.6B/M.86B to Link 16 Message Translation Tree.....	C-289
Table C.5.1-M.6C M.6C or M.6C/M.86C to Link 16 Message Translation Tree.....	C-293
Table C.5.1-M.6D M.6D or M.6D/M.86D to Link 16 Message Translation Tree.....	C-297
Table C.5.1-M.9A M.9A to Link 16 Message Translation Tree.....	C-303
Table C.5.1-M.9B M.9B to Link 16 Message Translation Tree.....	C-311
Table C.5.1-M.9C M.9C to Link 16 Message Translation Tree.....	C-315
Table C.5.1-M.9E M.9E to Link 16 Message Translation Tree.....	C-319
Table C.5.1-M.9F-1 M.9F(0)/M.89F(0) to Link 16 Message Translation Tree.....	C-323
Table C.5.1-M.9F-2 M.9F(1) to Link 16 Message Translation Tree.....	C-327
Table C.5.1-M.10A M.10A to Link 16 Message Translation Tree.....	C-331
Table C.5.1-M.11B M.11B to Link 16 Message Translation Tree.....	C-335
Table C.5.1-M.11C M.11C to Link 16 Message Translation Tree.....	C-339
Table C.5.1-M.11D M.11D to Link 16 Message Translation Tree.....	C-343
Table C.5.1-M.11M M.11M/M.811M to Link 16 Message Translation Tree.....	C-347
Table C.5.1-M.14 M.14 to Link 16 Message Translation Tree.....	C-351
Table C.5.1-M.15 M.15 to Link 16 Message Translation Tree.....	C-355
Table C.5.2-J.x J-Series Message Data Element Translation from Link 11/11B.....	C-363
Table C.5.2-J Header Message Data Element Translation from Link 11/11B.....	C-365
Table C.5.2-J2.0 J2.0 Message Data Element Translation from Link 11/11B.....	C-367
Table C.5.2-J3.0-1 J3.0 Message Data Element Translation from the M.4A/M.84A Message.....	C-371
Table C.5.2-J3.0-2 J3.0 Message Data Element Translation from the M.4C/M.84C Message.....	C-379
Table C.5.2-J3.0-3 J3.0 Message Data Element Translation from the M.5/M.85 Message.....	C-385
Table C.5.2-J3.0-4 J3.0 Message Data Element Translation from the M.9F(0)/M.89F(0) Message.....	C-393
Table C.5.2-J3.1 J3.1 Message Data Element Translation from Link 11/11B.....	C-399
Table C.5.2-J3.2 J3.2 Message Data Element Translation from Link 11/11B.....	C-403
Table C.5.2-J3.3 J3.3 Message Data Element Translation from Link 11/11B.....	C-407
Table C.5.2-J3.4 J3.4 Message Data Element Translation from Link 11/11B.....	C-413

MIL-STD-6016B

APPENDIX C

LIST OF TABLES (continued)

<u>Table</u>	<u>Page</u>
Table C.5.2-J3.5 J3.5 Message Data Element Translation from Link 11/11B.....	C-423
Table C.5.2-J3.7-1 J3.7 Message Data Element Translation from the M.5/M.85 Message.....	C-429
Table C.5.2-J3.7-2 J3.7 Message Data Element Translation from the M.6A Message.....	C-433
Table C.5.2-J3.7-3 J3.7 Message Data Element Translation from the M.6B/M.86B Message.....	C-439
Table C.5.2-J3.7-4 J3.7 Message Data Element Translation from the M.9F(0)/M.89F(0) Message.....	C-447
Table C.5.2-J5.4-1 J5.4 Message Data Element Translation from the M.4C/M.84C Message.....	C-451
Table C.5.2-J5.4-2 J5.4 Message Data Element Translation from the M.4D/M.84D Message.....	C-457
Table C.5.2-J6.0 J6.0 Message Data Element Translation from the M.11M/M.811M Message.....	C-465
Table C.5.2-J7.0-1 J7.0(ACT = 0) Message Data Element Translation from Link 11/11B.....	C-477
Table C.5.2-J7.0-2 J7.0(ACT = 1) or J7.0(ACT = 2) Message Data Element Translation from Link 11/11B.....	C-481
Table C.5.2-J7.0-3 J7.0(ACT = 3) or J7.0(ACT = 4) Message Data Element Translation from Link 11/11B.....	C-485
Table C.5.2-J7.1 J7.1 Message Data Element Translation from Link 11/11B.....	C-489
Table C.5.2-J7.2 J7.2 Message Data Element Translation from Link 11/11B.....	C-493
Table C.5.2-J7.3 J7.3 Message Data Element Translation from Link 11/11B.....	C-495
Table C.5.2-J7.4 J7.4 Message Data Element Translation from Link 11/11B.....	C-497
Table C.5.2-J7.5-1 J7.5 Message Data Element Translation from the M.9A(AC=9) Message.....	C-499
Table C.5.2-J7.5-2 J7.5 Message Data Element Translation from the M.11D Message.....	C-503
Table C.5.2-J7.7 J7.7 Message Data Element Translation from Link 11/11B.....	C-505
Table C.5.2-J9.0-1 J9.0 Message Data Element Translation from the M.9E/M.10A Message.....	C-507
Table C.5.2-J9.0-2 J9.0 Message Data Element Translation from the M.15 Message.....	C-511
Table C.5.2-J10.2 J10.2 Message Data Element Translation from Link 11/11B.....	C-515
Table C.5.2-J10.3 J10.3 Message Data Element Translation from Link 11/11B.....	C-517

MIL-STD-6016B

APPENDIX C

LIST OF TABLES (continued)

<u>Table</u>	<u>Page</u>
Table C.5.2-J10.5 J10.5 Message Data Element Translation from Link 11/11B.....	C-521
Table C.5.2-J10.6 J10.6 Message Data Element Translation from Link 11/11B.....	C-523
Table C.5.2-J13.2-1 J13.2 Message Data Element Translation from the M.11B Message.....	C-525
Table C.5.2-J13.2-2 J13.2 Message Data Element Translation from the M.11C Message.....	C-531
Table C.5.2-J13.2-3 J13.2 Message Data Element Translation from the M.14 Message.....	C-539
Table C.5.2-J13.3 J13.3 Message Data Element Translation from the M.14 Message.....	C-541
Table C.5.2-J13.4 J13.4 Message Data Element Translation from the M.14 Message.....	C-545
Table C.5.2-J13.5 J13.5 Message Data Element Translation from the M.14 Message.....	C-549
Table C.5.2-J14.0-1 J14.0 Message Data Element Translation from the M.5/M.85 Message.....	C-553
Table C.5.2-J14.0-2 J14.0 Message Data Element Translation from the M.6A Message.....	C-557
Table C.5.2-J14.0-3 J14.0 Message Data Element Translation from the M.6B/M.86B/M.6C/M.86C Message.....	C-565
Table C.5.2-J14.0-4 J14.0 Message Data Element Translation from the M.9F(0)/M.89F(0) Message.....	C-573
Table C.5.2-J14.2 J14.2 Message Data Element Translation from the M.6D/M.86D Message.....	C-577
Table C.5.2-Mx M-Series Message Data Element Translation from Link 16...	C-585
Table C.5.2-M.1-1 M.1/M.81 Message Data Element Translation from the J2.0 Message.....	C-587
Table C.5.2-M.1-2 M.1/M.81 Message Data Element Translation from the J2.2 Message.....	C-589
Table C.5.2-M.1-3 M.1/M.81 Message Data Element Translation from the J2.3 Message.....	C-591
Table C.5.2-M.1-4 M.1/M.81 Message Data Element Translation from the J2.4 Message.....	C-593
Table C.5.2-M.1-5 M.1/M.81 Message Data Element Translation from the J2.5 Message.....	C-595
Table C.5.2-M.1-6 M.1/M.81 Message Data Element Translation from the J2.6 Message.....	C-597
Table C.5.2-M.2-1 M.2/M.82 Message Data Element Translation from the J2.2 Message.....	C-599
Table C.5.2-M.2-2 M.2/M.82 Message Data Element Translation from the J3.2 Message.....	C-603

MIL-STD-6016B

APPENDIX C

LIST OF TABLES (continued)

<u>Table</u>	<u>Page</u>
Table C.5.2-M.2-3 M.2/M.82 Message Data Element Translation from the J3.6 Message.....	C-607
Table C.5.2-M.3-1 M.3/M.83 Message Data Element Translation from the J2.3 Message.....	C-611
Table C.5.2-M.3-2 M.3/M.83 Message Data Element Translation from the J3.3 Message.....	C-615
Table C.5.2-M.4A-1 M.4A/M.84A Message Data Element Translation from the J2.4 Message.....	C-621
Table C.5.2-M.4A-2 M.4A/M.84A Message Data Element Translation from the J3.0 Message.....	C-627
Table C.5.2-M.4A-3 M.4A/M.84A Message Data Element Translation from the J3.4 Message.....	C-633
Table C.5.2-M.4B-1 M.4B Message Data Element Translation from the J3.0 Message.....	C-641
Table C.5.2-M.4B-2 M.4B Message Data Element Translation from the J3.4 Message.....	C-643
Table C.5.2-M.4B-3 M.4B Message Data Element Translation from the J5.4 Message.....	C-647
Table C.5.2-M.4C M.4C/M.84C Message Data Element Translation from Link 16.....	C-649
Table C.5.2-M.4D M.4D/M.84D Message Data Element Translation from Link 16.....	C-653
Table C.5.2-M.5-1 M.5/M.85 Message Data Element Translation from the J2.0 Message.....	C-661
Table C.5.2-M.5-2 M.5/M.85 Message Data Element Translation from the J2.2 Message.....	C-663
Table C.5.2-M.5-3 M.5/M.85 Message Data Element Translation from the J2.3 Message.....	C-667
Table C.5.2-M.5-4 M.5/M.85 Message Data Element Translation from the J2.4 Message.....	C-671
Table C.5.2-M.5-5 M.5/M.85 Message Data Element Translation from the J2.5 Message.....	C-675
Table C.5.2-M.5-6 M.5/M.85 Message Data Element Translation from the J2.6 Message.....	C-679
Table C.5.2-M.5-7 M.5/M.85 Message Data Element Translation from the J3.0 Message.....	C-683
Table C.5.2-M.5-8 M.5/M.85 Message Data Element Translation from the J3.1 Message.....	C-689
Table C.5.2-M.5-9 M.5/M.85 Message Data Element Translation from the J3.5 Message.....	C-691
Table C.5.2-M.5-10 M.5/M.85 Message Data Element Translation from the J14.0 Message.....	C-697
Table C.5.2-M.6A-1 M.6A Message Data Element Translation from the J3.7 Message.....	C-699

MIL-STD-6016B

APPENDIX C

LIST OF TABLES (continued)

<u>Table</u>	<u>Page</u>
Table C.5.2-M.6A-2 M.6A Message Data Element Translation from the J14.0 Message.....	C-703
Table C.5.2-M.6B-1 M.6B/M.86B Message Data Element Translation from the J3.7 Message.....	C-707
Table C.5.2-M.6B-2 M.6B/M.86B Message Data Element Translation from the J14.0 Message.....	C-713
Table C.5.2-M.6C M.6C/M.86C Message Data Element Translation from Link 16.....	C-719
Table C.5.2-M.6D M.6D/M.86D Message Data Element Translation from Link 16.....	C-721
Table C.5.2-M.9A-1 M.9A(AC=0) Message Data Element Translation from Link 16.....	C-729
Table C.5.2-M.9A-2 M.9A(AC=1) Message Data Element Translation from the J3.2/J3.3 Message.....	C-731
Table C.5.2-M.9A-3 M.9A(AC=1 or 2) Message Data Element Translation from the J7.0 Message.....	C-733
Table C.5.2-M.9A-4 M.9A(AC=3) Message Data Element Translation from the J7.1 Message.....	C-735
Table C.5.2-M.9A-5 M.9A(AC=4) Message Data Element Translation from Link 16.....	C-737
Table C.5.2-M.9A-6 M.9A(AC=4) Message Data Element Translation from the J7.0 message.....	C-739
Table C.5.2-M.9A-7 M.9A(AC=5 or 7) Message Data Element Translation from the J2.x/J3.x Message.....	C-741
Table C.5.2-M.9A-8 M.9A(AC=5) Message Data Element Translation from the J7.0 Message.....	C-745
Table C.5.2-M.9A-9 M.9A(AC=6) Message Data Element Translation from the J7.0(ACT = 1) Message.....	C-747
Table C.5.2-M.9A-10 M.9A(AC=6) Message Data Element Translation from the J10.3 Message	C-749
Table C.5.2-M.9A-11 M.9A(AC=6) Message Data Element Translation from the J10.5 Message	C-751
Table C.5.2-M.9A-12 M.9A(AC=7) Message Data Element Translation from the J7.0 Message	C-753
Table C.5.2-M.9A-13 M.9A(AC=9) Message Data Element Translation from the J7.5 Message	C-755
Table C.5.2-M.9B-1 M.9B Message Data Element Translation from the J3.0 Message.....	C-759
Table C.5.2-M.9B-2 M.9B Message Data Element Translation from the J3.1 Message.....	C-761
Table C.5.2-M.9B-3 M.9B Message Data Element Translation from the J7.2 Message.....	C-763
Table C.5.2-M.9B-4 M.9B Message Data Element Translation from the J7.7 Message.....	C-765

MIL-STD-6016B

APPENDIX C

LIST OF TABLES (continued)

<u>Table</u>	<u>Page</u>
Table C.5.2-M.9B-5 M.9B Message Data Element Translation from the J10.6 Message.....	C-767
Table C.5.2-M.9C M.9C Message Data Element Translation from Link 16.....	C-769
Table C.5.2-M.9E-1 M.9E(AC=0) Message Data Element Translation from the J10.3 Message.....	C-771
Table C.5.2-M.9E-2 M.9E(AC=1) Message Data Element Translation from the J2.2 Message.....	C-773
Table C.5.2-M.9E-3 M.9E(AC=1) Message Data Element Translation from the J2.3 Message.....	C-775
Table C.5.2-M.9E-4 M.9E(AC=1) Message Data Element Translation from the J2.4 Message.....	C-777
Table C.5.2-M.9E-5 M.9E(AC=1) Message Data Element Translation from the J2.5 Message.....	C-779
Table C.5.2-M.9E-6 M.9E(AC=1) Message Data Element Translation from the J2.6 Message.....	C-781
Table C.5.2-M.9E-7 M.9E(AC=1) Message Data Element Translation from the J9.0 Message.....	C-783
Table C.5.2-M.9E-8 M.9E(AC=1) Message Data Element Translation from the J10.3 Message.....	C-785
Table C.5.2-M.9E-9 M.9E(AC=1) Message Data Element Translation from the J10.5 Message.....	C-787
Table C.5.2-M.9E-10 M.9E(AC=2) Message Data Element Translation from the J9.0 Message.....	C-789
Table C.5.2-M.9E-11 M.9E(AC=2) Message Data Element Translation from the J10.3 Message.....	C-791
Table C.5.2-M.9E-12 M.9E(AC=3) Message Data Element Translation from the J7.4 Message.....	C-793
Table C.5.2-M.9E-13 M.9E(AC=4) Message Data Element Translation from the J10.3 Message.....	C-795
Table C.5.2-M.9E-14 M.9E(AC=5) Message Data Element Translation from the J7.4 Message.....	C-797
Table C.5.2-M.9F-1 M.9F(0)/M.89F(0) Message Data Element Translation from the J3.0 Message.....	C-799
Table C.5.2-M.9F-2 M.9F(0)/M.89F(0) Message Data Element Translation from the J3.7 Message.....	C-801
Table C.5.2-M.9F-3 M.9F(0)/M.89F(0) Message Data Element Translation from the J14.0 Message.....	C-803
Table C.5.2-M.9F-4 M.9F(1) Message Data Element Translation from the J3.0 Message.....	C-805
Table C.5.2-M.9F-5 M.9F(1) Message Data Element Translation from the J3.7 Message.....	C-807
Table C.5.2-M.9F-6 M.9F(1) Message Data Element Translation from the J14.0 Message.....	C-809

MIL-STD-6016B

APPENDIX C

LIST OF TABLES (continued)

<u>Table</u>	<u>Page</u>
Table C.5.2-M.10A-1 M.10A Message Data Element Translation from the J9.0 Message.....	C-811
Table C.5.2-M.10A-2 M.10A Message Data Element Translation from the J10.3 Message.....	C-815
Table C.5.2-M.11B M.11B Message Data Element Translation from Link 16...	C-819
Table C.5.2-M.11C M.11C Message Data Element Translation from Link 16...	C-825
Table C.5.2-M.11D-1 M.11D Message Data Element Translation from the J2.x Message.....	C-831
Table C.5.2-M.11D-2 M.11D Message Data Element Translation from the J3.x Message.....	C-833
Table C.5.2-M.11D-3 M.11D Message Data Element Translation from the J7.5 Message.....	C-835
Table C.5.2-M.11M M.11M/M.811M Message Data Element Translation from the J6.0 Message.....	C-837
Table C.5.2-M.14-1 M.14 Message Data Element Translation from the J10.2 Message.....	C-855
Table C.5.2-M.14-2 M.14 Message Data Element Translation from the J13.2 Message.....	C-859
Table C.5.2-M.14-3 M.14 Message Data Element Translation from the J13.3 Message.....	C-861
Table C.5.2-M.14-4 M.14 Message Data Element Translation from the J13.4 Message.....	C-869
Table C.5.2-M.14-5 M.14 Message Data Element Translation from the J13.5 Message.....	C-873
Table C.5.2-M.15 M.15 Message Data Element Translation from the J9.0 Message.....	C-877

APPENDIX C

C.1 SCOPE

This appendix specifies the rules, message translation requirements, and data element translations required to exchange data between tactical data systems employing Link 16 and tactical data systems employing Link 11/11B. This appendix is a mandatory part of this standard. The information contained herein is intended for compliance.

C.2 APPLICABLE DOCUMENTS

C.2.1 GENERAL

The documents listed in this section are specified in sections C.4 and C.5 of this appendix. This section does not include documents cited in other sections of this standard, recommended for additional information, or used for examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents cited in sections C.4 and C.5 of this appendix, whether or not they are listed.

C.2.2 GOVERNMENT DOCUMENTS

C.2.2.1 SPECIFICATIONS, STANDARDS, AND HANDBOOKS

The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the current issues of these documents are listed in the Department of Defense Index of Specifications and Standards (DoDISS).

STANDARDS

DEPARTMENT OF DEFENSE

MIL-STD-6011C - Tactical Data Link (TDL) 11/11B Message
Standard

APPENDIX C

(Unless otherwise indicated, copies of the above specifications, standards, and handbooks are available from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

APPENDIX C

C.3 DEFINITIONS

The definitions in section 3 of this standard apply to this appendix.

MIL-STD-6016B

APPENDIX C

THIS PAGE INTENTIONALLY LEFT BLANK

APPENDIX C

C.4 GENERAL REQUIREMENTS

C.4.1 DATA FORWARDING RULES

The Link 16 interface is intended to provide improved information distribution, relative navigation, and identification capability in support of inter- and intra-Service/Agency tactical command and control and mission execution functions. These functions will also be supported by information exchange via other digital data links, e.g., Link 11 and 11B. For effective accomplishment of these functions, there must be an unrestricted flow of information between the Tactical Data Systems (TDSs) serviced by a network of digital data links. This requires that selected Command and Control (C²) TDSs interfacing with multiple links provide for transferring data between the dissimilar links without altering the intent of the information exchanged.

The purpose of MIL-STD-6016 Appendix C is to specify the rules, protocols, and translations required between J-Series and M-Series messages. Data forwarding is the process of receiving data on one digital data link and outputting the data, using proper format and link protocols, to another type of digital data link(s). In the process, a message(s) received on one link is translated to an appropriate message(s) on another link. Data forwarding is accomplished by the selected forwarding units(s) simultaneously participating on more than one type of data link. The data that is forwarded is based on the data received and is not dependent upon the local system data of the data forwarding unit or its implementation of the received message or the forwarded message. Those data elements applicable within the messages are translated to the appropriate data elements in the corresponding messages. Within the data forwarding process, data management will be minimized. All systems that forward data must adhere to appendix C. In the course of implementing Link 16, it is recognized that some systems may use internal system translations (i.e., Link 16 to Link 11B) and some systems may transmit originated track data on more than one data link at the same time. Functionally, such systems are not data forwarders; however, these systems will adhere to the guidance of section C.5.2 to ensure that the closest possible relationship of data elements and data element interpretation will be maintained among all users of the data.

APPENDIX C

C.4.1.1 FORWARDING REQUIREMENTS

A forwarding requirement exists between Link 16 and other links. This appendix covers only the forwarding between Link 16 (fixed word format) and inter-Service data links (Link 11/11B). Data forwarding shall be accomplished by the selected units simultaneously participating on more than one TDL.

C.4.1.2 FORWARDING CONSIDERATIONS

The Link 16 forwarding rules and procedures are designed to:

- a. Minimize the time delays inherent in the forwarding operation.
- b. Be used without any changes to existing digital data link protocols and message formats.
- c. Insure that data transmitted by the forwarding unit agree as closely as possible with the meaning of the data received for forwarding.

C.4.1.3 CONCURRENT OPERATIONS

Concurrent operations is the process of communicating on two, or more, digital data links at the same time as a participant. The concurrent operating unit exchanges all information held in its local database, but remote information is not forwarded. Protocols of each link are adhered to by the concurrent operating unit. The local database of a concurrent operating unit is the normal assimilation of data by that unit and includes local sensor data, local operator inputs, and data received and accepted into the local database from a data link, e.g., ID or IFF/SIF data.

C.4.2 DATA FORWARDING PROCESS

Factors to be considered in the data forwarding process are message translation and data element translation.

APPENDIX C

C.4.2.1 MESSAGE TRANSLATION

Message translation is the process by which a message or sequence of messages received on one data link is transformed to the appropriate message or message sequence required for transmission on another data link.

There may not be a one-for-one translation of the messages used on the data links. For example, multiple messages received on one link may translate into a single message to be transmitted on the second link, or vice versa. The translation of messages may vary based on message content. Therefore, message translation standards include rules for selecting the message(s) to which a received message or group of messages is to be translated based on the type of message(s) received and, in some cases, on the content of the message(s). A forwarder shall process the complete received message or message sequence in accordance with the appropriate translation tree, prior to taking any forwarding action. This process will eliminate the possibility of the forwarder originating unnecessary duplicate messages as each 'Required Action' of the Test Node Diagram is being considered. Section C.5.1 of this appendix provides the complete set of translations for those messages to be forwarded between Link 16 and Link 11/11B.

C.4.2.2 DATA ELEMENT TRANSLATION

Data element translation is the process by which a data element (also commonly referred to as a field) or multiple data elements received on one data link are transformed to the appropriate data element(s) required for transmission on another data link. This translation is done by equating data elements, converting data elements, and using special considerations for which equivalence and conversion do not apply. Section C.5.2 of this appendix provides a complete set of data element translations for those data elements to be forwarded between Link 16 and Link 11/11B.

C.4.2.2.1 DATA ELEMENT EQUIVALENCE

Data element equating is the process of moving, without change, a data item value of a data element from a received message on one link to a data item

APPENDIX C

value of a data element in a different message format for transmission on another link.

C.4.2.2.2 DATA ELEMENT CONVERSION

Data element conversion is the process of altering the data item value of a data element from a received message on one link to a data item value of a data element in a different message format for transmission on another link. This process is employed when some degree of data item value conversion by a forwarding unit is required. For example, data element conversion may alter the granularity, transform coordinates, or change velocity to course and speed. In some cases multiple data elements from one data link will relate to a single data element on another data link, e.g., M-Series scale factors.

C.4.2.2.3 SPECIAL CONSIDERATIONS

There are data elements for which equivalence and conversion do not apply, and these require special considerations, such as (1) disregarding a data element that is not applicable to the message format that will be transmitted, (2) generating data elements not available in the received message but required for the format of the message to be transmitted, (3) retaining and recalling from the forwarding system's database information that is required by differing message formats on the varying links, e.g., data source.

C.4.3 GENERAL FORWARDING RULES

These forwarding rules are established to standardize data forwarding between Link 16 and Link 11/11B:

a. When data link networks are established, there shall be only one communication path in use at a time for data being forwarded to prevent communication loops. A communication path is a combination of digital data links and interconnecting nodes that provide a path for information exchange.

b. The Forwarding JTIDS Unit (FJU) must be provided sufficient time slots by the network manager so that all required messages from Link 11/11B

APPENDIX C

can be forwarded onto Link 16. Also, the FJU must be a participant on those participation groups for which messages are being forwarded.

c. All translatable messages from the Link 16 participation groups on which the FJU is a participant shall be forwarded onto Link 11/11B, as required by this appendix. The FJU shall discard messages that cannot be forwarded.

d. All translatable messages from Link 11/11B shall be forwarded onto the Link 16 participation groups on which the FJU is a participant, as required by this appendix. The FJU shall discard messages that cannot be forwarded.

e. The FJU shall use the same transmit rules to forward a translated message that it would use to transmit a locally originated message of the same type. The FJU shall resolve any differences in the transmit procedures of the various types of links that it interfaces with, as specified in section C.5.1. For example, a message may be transmitted N times at M-second intervals on Link 11/11B and the corresponding message may be transmitted only once on Link 16. Therefore, the forwarder must have provisions for identifying and discarding the retransmission of the message from Link 11/11B, since the FJU must transmit the corresponding message only once on Link 16. Conversely, the FJU must have provisions for identifying when to redundantly retransmit a previously received message from Link 16 onto Link 11/11B. The message translation trees in section C.5.1 specify forwarding transmit rules.

f. The FJU shall inhibit the forwarding of received data when:

(1) The data are received from, or addressed to, a unit not currently held as an active interfacing unit. There are two exceptions to this rule:

(a) Reestablishing active status of the Interface Unit (before receipt of data).

MIL-STD-6016B

APPENDIX C

(b) If the addressed message is either a J9.0 with Command set to value 0-8 or 23, or M.15 with Command set to value 0-8, the message may be forwarded as a system option.

(2) The coordinated filter criteria for the appropriate TDL prohibits forwarding the data.

(3) The received message is technically illegal or invalid as defined in MIL-STD-6016 and/or MIL-STD-6011.

(4) A periodically updated message is superseded by a second message before the first message can be forwarded. The new data shall override the stale data and only the most current message shall be forwarded.

g. The FJU shall have the capability to filter exercise and Special Processing Indicator (SPI) data. Emergency and Force Tell track alerts shall override exercise and SPI filters. Forwarding of the following information shall not be inhibited by any other filter that is under operator control:

(1) Data on Command and Control Interface Units (C² IUs) and on track numbers less than 00200 (octal).

(2) Information on any track or nonCommand and Control Interface Unit (nonC² IU) with an Emergency or Force Tell indicator set.

(3) Commands.

(4) Engagement Status.

(5) Handovers.

(6) Controlling Unit Reports.

(7) Pairings.

(8) Track Management.

APPENDIX C

h. The FJU shall forward an addressed message only on the interfacing link upon which the message addressee is located. All other messages, including messages containing a collective address, shall be forwarded on all interfacing links except the link upon which the message was received.

i. When addressed messages require receipt/compliance, the FJU shall transmit a machine receipt or appropriate CANTPRO to the message originator. Machine receipts (R/C = 2) shall not be forwarded. The message translation trees in section C.5.1 specify the response(s) for automatic CANTPRO responses.

j. The FJU may extrapolate positional data for real-time tracks and units to the time of transmission.

C.4.4 ACTIVE/INACTIVE STATUS

An FJU shall maintain the active status of each Command and Control JTIDS Unit (C² JU) on Link 16 and of each Participating Unit (PU) and/or Reporting Unit (RU) on Link 11/11B. Only data from active sources shall be forwarded. Responses to Data Update Request are found in the message translation trees in section C.5.1.

C.4.4.1 LINK 11 TO LINK 16 ACTIVE UNIT INDICATION

The active status of a Link 11 unit or of a unit received via Link 11 is determined by the receipt of a valid M.1 or M.1/M.5 message sequence. In some cases involving the Special Processing or the Reference/Position Indicators, two separate M.1 sequences for the unit may be received during a single Link 11 transmit opportunity. (Two M.1 messages will form each M.1 message sequence.) An FJU shall transmit a J2.0 message on a unit when an M.1 sequence is received from Link 11. In cases where two separate M.1 message sequences are received during a single transmit opportunity, the FJU may transmit a single J2.0 message or a separate J2.0 message for each M.1 message sequence.

APPENDIX C

C.4.4.2 LINK 11B TO LINK 16 ACTIVE UNIT INDICATION

The active status of a directly tied Link 11B unit is determined by the receipt of a valid M.1 or M.1/M.9A(AC=0)/M.5 message sequence. (Two M.1 messages will form each M.1 message sequence.) The continued active status of the directly tied Link 11B unit is determined by the receipt of periodic M.0 messages. The active status of an indirectly tied unit on Link 11B is determined by receipt of a valid M.9A(AC=0)/M.5 message sequence. An FJU shall transmit a J2.0 message on a unit when an M.1, M.1/M.9A(AC=0)/M.5, or M.9A(AC=0)/M.5 message sequence is received on Link 11B. The unit may remain active indefinitely, with no further M.1 or M.5 messages being received. The FJU shall continue to transmit J2.0 messages at the periodic rate specified for Link 16 as long as the unit remains active.

C.4.4.3 LINK 16 TO LINK 11 ACTIVE UNIT INDICATION

The active status of a Link 16 unit is determined by the receipt of a J2 series message with the Network Participation Status Indicator set to a value of 1, 4, or 5. The active status of a non-Link 16 unit, forwarded through Link 16, is determined by the receipt of a J2.0 message. An FJU shall transmit an M.1 message sequence (with R/P Indicator = 1) in each FJU Link 11 transmit opportunity for each active forwarded C² unit held. An M.5 message will be sent as a part of the M.1 message sequence initially and at the appropriate rate thereafter. If the C² unit position or other data changes, the M.1/M.5 message sequence shall be sent at the next FJU Link 11 transmit opportunity. Multiple M.1 message sequences for the same C² unit may be required during a single FJU Link 11 transmit opportunity to forward data with different Special Processing requirements. See paragraph C.4.7.1 for data forwarding of active nonC² units.

C.4.4.4 LINK 16 TO LINK 11B ACTIVE UNIT INDICATION

The active status of a Link 16 unit is determined by the receipt of an appropriate J2 series message with the Network Participation Status Indicator set to a value of 1, 4, or 5. The active status of a nonLink 16 unit, forwarded through Link 16, is determined by the receipt of a J2.0 message. An FJU shall transmit an M.9A(AC=0)/M.5 message sequence upon receipt of any

APPENDIX C

J2 series message that establishes a C² unit as being active. An M.5 message shall be transmitted if the C² unit position or other forwarded data change in the J2 series message. See paragraph C.4.7.1 for data forwarding of active nonC² units. Except as indicated above, the redundant J2 series message shall not be forwarded on Link 11B.

C.4.4.5 LINK 11 TO LINK 16 INACTIVE UNIT INDICATION

When a valid M.1 message sequence has not been received from a unit on Link 11 within the past 60 seconds, the unit shall be declared inactive. The FJU shall transmit a J7.0 Drop Track Report and cease transmitting J2.0 messages for a unit that becomes inactive.

C.4.4.6 LINK 11B TO LINK 16 INACTIVE UNIT INDICATION

Units shall be declared inactive on Link 11B if:

- a. A valid M.0 message has not been received from a directly tied unit in the past 60 seconds.
- b. A drop track is received from a Forwarding Reporting Unit (FRU) on an indirectly tied unit that the FRU had been forwarding.
- c. An FRU becomes inactive. All units forwarded by that FRU shall be declared inactive concurrently.

The FJU shall transmit a J7.0 Drop Track Report and cease transmitting J2.0 messages for a unit that becomes inactive.

C.4.4.7 LINK 16 TO LINK 11/11B INACTIVE UNIT INDICATION

A unit shall be declared inactive on Link 16 if:

- a. A J2 series message is not received for 60 seconds.
- b. A J2 series message is received with the Network Participation Status Indicator (NPS IND) set to any value other than 1, 4, or 5.

APPENDIX C

The FJU shall transmit an M.9A(AC=4) Drop Track message and cease reporting data on a unit that becomes inactive on Link 16.

C.4.5 TDL UNIQUE FORWARDING RULES

Due to the differing methods of identifying data source and positional information on the different data links, unique protocols are required for each link.

C.4.5.1 FORWARDING OF DATA ON LINK 16

When forwarding data from Link 11/11B to Link 16, the FJU shall identify the source of all data. This is done by setting the Track Number, Source located in the header to the address of the unit being forwarded. All positional data on Link 16 is expressed in geodetic latitude and longitude.

C.4.5.2 FORWARDING OF DATA ON LINK 11

When forwarding data from Link 16 to Link 11, the FJU shall transmit all data for which a C² unit is the source following the M.1 or M.1/M.5 message sequence used to indicate that unit is an active participant. The M.1 message shall contain the PU/RU Address (Track Number, Source) of the unit whose data are being forwarded and the Delta Latitude/Delta Longitude, referenced from the Data Link Reference Point (DLRP), which reflect the System Coordinate Center (SCC) of the FJU. All positional data other than the M.1 is X-Y data referenced to the SCC of the FJU.

C.4.5.3 FORWARDING OF DATA ON LINK 11B

When forwarding data from Link 16 to Link 11B, the FJU establishes SCC with an M.1 to each directly tied Link 11B unit giving Delta Latitude/Delta Longitude from the DLRP. All positional data other than the M.1 is X-Y data referenced to the SCC of the FJU. When forwarding track reports the FJU shall transmit an initial sequence with the C² unit (whose data are being forwarded) indicated as the data source in an M.9A(AC=0) message. Following receipt of an acknowledgement from a directly tied Link 11B unit, updated track reports on the acknowledged track shall be forwarded without including

APPENDIX C

data source unless the source changes. Forwarding of other data which do not utilize the M.9A(AC=0) message to identify data source will be in accordance with the conventions of Link 11B.

C.4.6 DATA FORWARDING OF INFORMATION REQUIRING SPECIAL PROCESSING

Information that requires special processing may be forwarded only to those systems capable of handling that level of classification. An FJU shall adhere to all current constraints concerning the handling of data requiring special processing.

C.4.6.1 DATA FORWARDING OF INFORMATION REQUIRING SPECIAL PROCESSING TO LINK 11B

The special processing status of the information on a track shall be reflected by the SPI field in the M.9A(AC=0) message of an initial message sequence. If the SPI changes in a J3 series message, a new initial sequence shall be transmitted to promulgate the change.

C.4.6.2 DATA FORWARDING OF INFORMATION REQUIRING SPECIAL PROCESSING TO LINK 11

The special processing status of the information on a track forwarded onto Link 11 shall be reflected by the SPI in the M.1 messages preceding the track reports. If both the information requiring special processing and the information not requiring special processing are forwarded from the same JU, the information not requiring special processing shall be transmitted following M.1 messages with the SPI set to 0. The information requiring special processing shall then be transmitted following M.1 messages with the SPI set to 1. If the SPI changes in a J3 series message, the track report shall be transmitted behind the M.1 messages with the SPI set appropriately.

C.4.6.3 DATA FORWARDING OF INFORMATION REQUIRING SPECIAL PROCESSING TO LINK 16

The special processing status of information forwarded on Link 16 shall be reflected by the SPI in the appropriate J-Series message(s). If the special

APPENDIX C

processing status of the information received changes, the SPI in the corresponding J-Series message(s) shall be changed appropriately.

C.4.7 PRECISE PARTICIPANT LOCATION AND IDENTIFICATION DATA FORWARDING

Forwarding of Precise Participant Location and Identification (PPLI) message data promulgates the location and identification of all JTIDS/MIDS units. The forwarding of nonC² JU and C² JU PPLI data is explained in the following paragraphs.

C.4.7.1 NONC² JU DATA FORWARDING

NonC² JU PPLI messages indicating active network participation status are forwarded onto Link 11/11B as either a special point or surveillance track information, e.g., M.2 messages, with the source track number of the FJU indicated as having reporting responsibility (R²). Surveillance tracks shall have their Track Quality set to 7 in this case. If a nonC² JU is active and a Link 11/11B unit attempts to take R², the following rules shall apply:

- a. The FJU shall accept and acknowledge the Link 11/11B initial sequence and forward to all other Link 11/11B links.
- b. The FJU shall not forward the Link 11/11B initial sequences onto Link 16.
- c. Upon reception of next J2 series message, the FJU shall forward a new initial sequence to Link 11/11B and reassume R².

If no PPLI data have been received from the nonC² JU for 60 seconds, and no initial sequence has been received from Link 11/11B a Drop Track message shall be transmitted by the FJU on Link 11/11B. Also, if a PPLI message indicating that the nonC² JU is inactive has been received, a Drop Track message shall be transmitted by the FJU on Link 11/11B. The nonC² JU is then eligible for normal surveillance reporting responsibility rules. Upon receipt of a PPLI message indicating that the nonC² JU has returned to active status, the FJU again shall forward the surveillance messages on the nonC² JU,

APPENDIX C

with the track number of the FJU as the data source, and shall not forward Link 11/11B originated surveillance data on the track to Link 16.

C.4.7.2 C² JU DATA FORWARDING

C² JU PPLI messages indicating active network participation status from designated units shall be forwarded on Link 11/11B, as described in section C.5.1. If another PPLI message is not received within 60 seconds from the previous PPLI message or a PPLI message indicating inactive status is received, a Drop Track message shall be transmitted on Link 11/11B. As long as the C² JU is active, the FJU shall not allow a Link 11/11B unit to assume reporting responsibility of this unit in a surveillance message.

PPLI messages having source track number 00200 (octal) or greater, or exceed the maximum source capacity of the FJU, shall be forwarded as surveillance tracks in accordance with paragraph C.4.7.1. The data from these units shall be forwarded with a pseudo source track number address of 176 (octal). The FJU shall set the position of the pseudo source track number 176 (octal) to 10 data miles north of the DLRP. Addressed messages to or from these units and/or the pseudo source track number shall not be forwarded.

C.4.8 DATA FORWARDING MANAGEMENTC.4.8.1 SURVEILLANCE DATA FORWARDING

The forwarding of surveillance messages is specified in the message translation trees in section C.5.1. For various reasons two or more units may be reporting the same track to an FJU. The following criteria for forwarding shall be employed for all surveillance tracks that employ track quality:

- a. If an FJU is forwarding nonreal-time data on a track and real-time data are received on the track, then the real-time data shall be forwarded starting at the next transmission opportunity, and nonreal-time data shall be inhibited.

APPENDIX C

b. After a Drop Track message has been forwarded, data from each unit to subsequently report the track shall be forwarded at the next available transmit opportunity.

c. Data forwarding of surveillance messages from Link 16 to a Link 11/11B link is limited to tracks that are positioned within 511-3/4 miles of the FJU's SCC reported on that link.

C.4.8.2 FORWARDING CONTROLLING UNIT DATA

C.4.8.2.1 LINK 16 TO LINK 11/11B

The J10.5 Controlling Unit Report message shall be forwarded as an M.9A(AC=6) message. The M.9A(AC=6) Identity, Primary Identity Amplification and Identity Amplification fields shall be translated from the most current Identity, Platform, Platform Activity, Special Interest Indicator, and Exercise Indicator fields held in the FJU database in accordance with General Note 20 or 21. This rule is in accordance with paragraph C.4.2.2.3 (3), stating the requirement to retain and recall information from the FJUs database.

The J7.0 (ACT = 1) message, with Controlling Unit Indicator = 1, shall be forwarded as an M.9A(AC=6) message having Identity, Primary Identity Amplification and Identity Amplification as translated from the J7.0 message. In all other cases the J7.0 message will be forwarded as an M.9A message with the appropriate action code, regardless of source.

C.4.8.2.2 LINK 11/11B TO LINK 16

The Identity, Primary Identity Amplification and Identity Amplification in an M.9A(AC=6) message shall not be forwarded by the FJU.

The FJU shall set the Controlling Unit Indicator in a J7.0 message as appropriate to indicate whether the originator of an M.9A(AC=1 or 2) does or does not have control of the track.

APPENDIX C

C.4.8.3 FORWARDING IFF/SIF INFORMATIONC.4.8.3.1 FORWARDING IFF/SIF SURVEILLANCE INFORMATION

Identification Friend or Foe/Selective Identification Feature (IFF/SIF) information for Modes I, II, III, and IV is exchanged on both Link 11/11B and Link 16. The unit with R² for a track reports any available IFF/SIF information. The FJU forwards IFF/SIF information in a surveillance message or message sequence only when received from the R² unit.

C.4.8.3.2 FORWARDING IFF/SIF MANAGEMENT INFORMATION

IFF/SIF Management information (i.e., J7.5, M.9A(AC=9)) shall be forwarded as received. Information received in IFF/SIF Management messages, with the exception of IFF/SIF clear messages, shall not be used by the FJU to update IFF/SIF information stored for tracks that are being forwarded.

C.4.8.3.3 FORWARDING SPECIAL CODE INFORMATION

Special Code information shall be forwarded as received.

C.4.8.4 FORWARDING ADDRESSED MESSAGES HAVING RECEIPT/COMPLIANCE

Forwarding addressed Command, Handover, or EW Control/Coordination messages that involve Receipt/Compliance (R/C) requires special handling procedures by the FJU. The FJU inspects all addressed messages to ascertain if the addressee is a unit for which data are being forwarded. The FJU shall respond with a Machine Receipt (MR) to either Original Messages (OM) or to Reply Messages as if it were the addressee for all messages which will be forwarded. The FJU shall then forward the addressed message on the link on which the addressee is active. If the addressee is not active on any link and the addressed message is either a J9.0 with Command set to values 0-8 or 23, or M.15 with Command set to values 0-8, then the message may be discarded or forwarded as a system option. The FJU shall substitute data source indications appropriate to the link on which data are being forwarded. The FJU assumes responsibility for redundant transmissions if an MR is not received. When an MR or other reply in lieu of an MR is received by the FJU,

APPENDIX C

forwarding responsibility for that specific addressed message is complete. The FJU has no responsibility with respect to matching replies to an OM except when a reply is received in lieu of an MR. The FJU shall generate a CANTPRO (automatic CANTCO for EW Control/Coordination on Link 11/11B) response to the originator of an OM if the addressed unit is inactive or if the addressee fails to MR the forwarded message. If a list of inactive units for which the FJU has forwarding responsibilities is not maintained, the FJU shall not generate an MR, CANTPRO, or CANTCO response for inactive units. The transmission sequences vary depending upon the TDLs involved and whether the message is a Handover, Command or EW Control/Coordination message. Specific sequences for Command and Handover messages are provided in tables C.4.8-1 through C.4.8-8.

In order to ensure that commanders can be aware of commands originated by and addressed to other than the commander's own unit, an FJU may forward Command messages onto a link other than the one on which the addressee is active. This is an authorized exception to the actions required by test node condition 1 of tables C.5.1-J9.0 and C.5.1-M.15. The above R/C procedures (and those contained in paragraph 4.1.7 of MIL-STD-6016) are not applicable to such forwarded Commands. The JTIDS/MIDS terminal, however, will automatically notify the FJU (host) that a MR has not been received; the FJU (host), therefore, must ensure that a CANTPRO is not transmitted. The FJU must ensure that Commands are not redundantly forwarded to the same addressee via more than one forwarding unit, due to the R/C problems this would create.

Throughout these tables, the following apply:

- o The units are illustrated with the following addresses:
 - 10 = Link 11 PU being forwarded
 - 20 = the FJU
 - 30 = Link 16 JU being forwarded
 - 140 = Link 11B RU being forwarded
- o The tables are broken into 3 to 5 segments. The first segment is the forwarding and machine receipt for the original message. The next segment(s) provides the forwarding and machine receipt for

APPENDIX C

replies made by the originally addressed unit. The final segment(s) provides the CANTPRO actions required when the forwarding unit is unable to forward an original message. No CANTPRO responses are made when the FJU is unable to forward a reply message.

MIL-STD-6016B

APPENDIX C

THIS PAGE INTENTIONALLY LEFT BLANK

TABLE C.4.8-1. Command Message Transmission Sequence Link 16 to Link 11 (Sheet 1 of 2)

EVENT	JU (Address = 30)	Link 16	FJU (Address = 20)	Link 11	PU (Address = 10)
1	Operator originates Command J9.0 (R/C = 0, ADD = 10, Source = 30) (For forwarding Commands that result in a Handover Message on Link 11, see Handover Link 16 to Link 11.)	---->	(If PU 10 is not active go to Event 7. Machine Receipt may be sent prior to Event 7.)		
2	(If MR or other reply is not received, Event 1 is repeated 1 time.)	<-- -----	J9.0 (R/C = 2, ADD = 30, Source = 10) M.1's (ADD = 20) M.1's (ADD = 30) M.15 (R/C = 0, ADD = 10)	----- --->	
3			(If MR or other reply is not received, the Link 11 portion of Event 2 is repeated 6 times. If still no response, go to Event 7. The received MR is not forwarded.)	<-----	M.1's (ADD = 10) M.15 (R/C = 2, ADD = 30) (May make other response in lieu of R/C = 2)
4				<-----	WILCO, CANTCO, or CANTPRO M.1's (ADD = 10) M.15 (R/C = 3, 6, or 7; ADD = 30)

TABLE C.4.8-1. Command Message Transmission Sequence Link 16 to Link 11 (Sheet 2 of 2)

EVENT	JU (Address = 30)	Link 16	FJU (Address = 20)	Link 11	PU (Address = 10)
5			M.1's (ADD = 20) M.1's (ADD = 30) M.15 (R/C = 2, ADD = 10) ----- <--- J9.0 (R/C = 3, 6, or 7; ADD = 30; Source = 10)		(If MR is not received, Event 4 is repeated 6 times.)
6	J9.0 (R/C = 2, ADD = 10, Source = 30) (Command process terminates)	--->	(If MR is not received, Event 5, transmission of J9.0 is repeated 1 time. If MR is still not received, no further action takes place.)		
7		<--- <---	PU 10 IS INACTIVE J9.0 (R/C = 20, ADD = 30, Source = 10) -OR- NO MR RECEIVED IN EVENT 3 J9.0 (R/C = 21, ADD = 30, Source = 10)		
8	J9.0 (R/C = 2, ADD = 10, Source = 30) (Command process terminates)	--->	(If MR is not received, Event 7 is repeated 1 time. If MR is still not received, no further action takes place.)		

TABLE C.4.8-2. Command Message Transmission Sequence Link 16 to Link 11B (Sheet 1 of 2)

EVENT	JU (Address = 30)	Link 16	FJU (Address = 20)	Link 11B	RU (Address = 140)
1	Operator originates Command J9.0 (R/C = 0, ADD = 140, Source = 30) (For forwarding commands that result in a Handover message on Link 11B, see Handover Link 16 to Link 11B.)	----->	(If RU 140 is not active go to Event 7. Machine Receipt may be sent prior to Event 7.)		
2	(If MR or other reply is not received, Event 1 is repeated 1 time.)	<----- -----	J9.0 (R/C = 2, ADD = 30, Source = 140) ----- M.15 (R/C = 0, ADD = 140, TN-1 = 30) (For command values 12 or greater, TN-1 will be other than 30.)	----- ----->	
3			(If MR or other reply is not received, Event 2, transmission of M.15 is repeated 6 times. If still no response, go to Event 7. The received MR is not forwarded.)	<-----	M.15 (R/C = 2, ADD = 30, TN-1 = 140) (May make other response in lieu of R/C = 2)
4				<-----	<u>WILCO, CANTCO or CANTPRO</u> M.15 (R/C = 3, 6, or 7; ADD = 30; TN-1 = 140)

TABLE C.4.8-2. Command Message Transmission Sequence Link 16 to Link 11B (Sheet 2 of 2)

EVENT	JU (Address = 30)	Link 16	FJU (Address = 20)	Link 11B	RU (Address = 140)
5		----- <---	M.15 (R/C = 2, ADD = 140, TN-1 = 30) ----- J9.0 (R/C = 3, 6, or 7; ADD = 30; Source = 140)	---> -----	(If MR is not received, Event 4 is repeated 6 times)
6	J9.0 (R/C = 2, ADD = 140, Source = 30) (Command process terminated)		(If MR is not received, Event 5, transmission of J9.0 is repeated 1 time. If MR is still not received, no further action takes place.)		
7		<--- <---	RU 140 IS INACTIVE J9.0 (R/C = 20, ADD = 30, Source = 140) -OR- NO MR RECEIVED IN EVENT 3 J9.0 (R/C = 21, ADD = 30, Source = 140)		
8	J9.0 (R/C = 2, ADD = 140, Source = 30) (Command process terminates)	--- >	(If MR is not received, Event 7 is repeated 1 time. If MR is still not received, no further action takes place.)		

TABLE C.4.8-3. Command Message Transmission Sequence Link 11 to Link 16 (Sheet 1 of 2)

EVENT	PU (Address = 10)	Link 11	FJU (Address = 20)	Link 16	JU (Address = 30)
1	Operator originates Command M.1's (ADD = 10) M.15 (R/C = 0, ADD = 30)	----->	(If JU 30 is not active go to Event 7. Machine Receipt may be sent prior to Event 7.)		
2	(If MR or other reply is not received, Event 1 is repeated 6 times.)	<----- -----	M.1's (ADD = 20) M.1's (ADD = 30) M.15 (R/C = 2, ADD = 10) ----- J9.0 (R/C = 0, ADD = 30, Source = 10)	----->	
3			(If MR or other reply not received, Event 2, trans- mission of J9.0 is repeated 1 time. If still no response, go to Event 9. The received MR is not forwarded.)	<-----	J9.0 (R/C = 2, ADD = 10, Source = 30) (May make other response in lieu of R/C = 2)
4				<-----	<u>WILCO, CANTCO, or CANTPRO</u> J9.0 (R/C = 3, 6, or 16-19; ADD = 10; Source = 30)
5		----- <-----	J9.0 (R/C = 2, ADD = 30, Source = 10) ----- M.1's (ADD = 20) M.1's (ADD = 30) M.15 (R/C = 3, 6, or 7; ADD = 10)	-----> -----	(If MR is not received, Event 4 is repeated 1 time.)

TABLE C.4.8-3. Command Message Transmission Sequence Link 11 to Link 16 (Sheet 2 of 2)

EVENT	PU (Address = 10)	Link 11	FJU (Address = 20)	Link 16	JU (Address = 30)
6	M.1's (ADD = 10) M.15 (R/C = 2, ADD = 30) (Command process terminates)	--->	(If MR is not received, the Link 11 portion of Event 5 is repeated 6 times. If MR is still not received, no further action takes place.)		
7		<---	<u>JU 30 IS INACTIVE</u> M.1's (ADD = 20) M.15 (R/C = 7, ADD = 10)		
8	M.1's (ADD = 10) M.15 (R/C = 2, ADD = 20)	--->	(If MR is not received, Event 7 is repeated 6 times. If MR is still not received, no further action takes place.)		
9		<---	<u>NO MR RECEIVED IN EVENT 3</u> M.1's (ADD = 20) M.1's (ADD = 30) M.15 (R/C = 7, ADD = 10)		
10	M.1's (ADD = 10) M.15 (R/C = 2, ADD = 30) (Command process terminates)	--->	(If MR is not received, Event 9 is repeated 6 times. If MR is still not received, no further action takes place.)		

TABLE C.4.8-4. Command Message Transmission Sequence Link 11B to Link 16 (Sheet 1 of 2)

EVENT	RU (Address = 140)	Link 11B	FJU (Address = 20)	Link 16	JU (Address = 30)
1	Operator originates Command M.15 (R/C = 0, ADD = 30, TN-1 = 140) (For order values 12 or greater, TN-1 will be other than 140. This rule applies only when R/C = 0.)	----->	(If JU 30 is not active, go to Event 7. Machine Receipt may be sent prior to Event 7.)		
2	(If MR or other reply is not received, Event 1 is repeated 6 times.)	<--- -----	M.15 (R/C = 2, ADD = 140, TN-1 = 30) ----- J9.0 (R/C = 0, ADD = 30, Source = 140)	----- --->	
3			(If MR or other reply is not received, Event 2, transmission of J9.0 is repeated 1 time. If still no response, go to Event 7. The received MR is not forwarded.)	<---	J9.0 (R/C = 2, ADD = 140, Source = 30) (May make other response in lieu of R/C = 2)
4				<-----	WILCO, CANTCO or CANTPRO J9.0 (R/C = 3, 6, 7 or 16-19; ADD = 140; Source = 30)

TABLE C.4.8-4. Command Message Transmission Sequence Link 11B to Link 16 (Sheet 2 of 2)

EVENT	RU (Address = 140)	Link 11B	FJU (Address = 20)	Link 16	JU (Address = 30)
5		----- <---	J9.0 (R/C = 2, ADD = 30, Source = 140) ----- M.15 (R/C = 3, 6, or 7; ADD = 140; TN-1 = 30)	---> -----	(If MR is not received, Event 4 is repeated 1 time.)
6	M.15 (R/C = 2, ADD = 30, TN-1 = 140)	--->	(If MR is not received, Event 5, transmission of M.15 is repeated 6 times. If MR is still not received, no further action takes place.)		
7		<---	JU 30 IS INACTIVE -OR- NO MR RECEIVED IN EVENT 3 M.15 (R/C = 7, ADD = 140, TN-1 = 30)		
8	M.15 (R/C = 2, ADD = 30, TN-1 = 140) (Command process terminates)	--->	(If MR is not received, Event 7 is repeated 6 times. If MR is still not received, no further action takes place.)		

TABLE C.4.8-5. Handover Message Transmission Sequence Link 16 to Link 11 (Sheet 1 of 3)

EVENT	JU (Address = 30)	Link 16	FJU (Address = 20)	Link 11	PU (Address = 10)
1	Operator originates Handover J10.3 (R/C = 0, ADD = 10, Source = 30)	----->	(If PU 10 is not active, go to Event 10. Machine Receipt may be sent prior to Event 10.)		
2	(If MR or other reply is not received, Event 1 is repeated 1 time.)	<----- -----	J10.3 (R/C = 2, ADD = 30, Source = 10) ----- M.1's (ADD = 20) M.1's (ADD = 30) M.9A (AC = 6, ADD = 30) M.10A (R/C = 0, ADD = 10) M.9E (as translated from J10.3)	----- ----->	
3			(If MR or other reply not received, all of Event 2, Link 11 portion, is repeated 6 times. If still no response, go to Event 10. The received MR is not forwarded.)	<-----	M.1's (ADD = 10) M.10A (R/C = 2, ADD = 30) (May make other response in lieu of R/C = 2)
4				<-----	<u>CANTCO or CANTPRO</u> M.1's (ADD = 10) M.10A (R/C = 6 or 7, ADD = 30) (If R/C = 7, set AMP value as appropriate.)

TABLE C.4.8-5. Handover Message Transmission Sequence Link 16 to Link 11 (Sheet 2 of 3)

EVENT	JU (Address = 30)	Link 16	FJU (Address = 20)	Link 11	PU (Address = 10)
5			M.1's (ADD = 20) M.1's (ADD = 30) M.10A (R/C = 2, ADD = 10) ----- <--- J10.3 (R/C = 6, 7, or 16-19; ADD = 30; Source = 10) (CANTPRO values as determined from CANTPRO AMP)	---> -----	
6	J10.3 (R/C = 2, ADD = 10, Source = 30) (Handover process terminates)	--->	(If MR is not received, the Link 16 portion of Event 5 is repeated 1 time. If MR is still not received, no further action takes place.)		
7				<--- WILCO M.1's (ADD = 10) M.10A (R/C = 3, ADD = 30) M.9E (as appropriate)	
8			M.1's (ADD = 20) M.1's (ADD = 30) M.10A (R/C = 2, ADD = 10) ----- <--- J10.3 (R/C = 3, ADD = 30, Source = 10)	---> -----	(If MR is not received, Event 7 is repeated 6 times.)

TABLE C.4.8-5. Handover Message Transmission Sequence Link 16 to Link 11 (Sheet 3 of 3)

EVENT	JU (Address = 30)	Link 16	FJU (Address = 20)	Link 11	PU (Address = 10)
9	J10.3 (R/C =2, ADD = 10, Source = 30) (Direct aircraft to shift to PU 10's control)	--->	(If MR is not received, Event 8, transmission of J10.3 is repeated 1 time. If MR is still not received, no further action takes place.)		(When aircraft control is established, commence reporting M.9A (AC = 6) message.)
10		<---	<u>PU 10 IS INACTIVE</u> J10.3 (R/C = 20, ADD =30, Source = 10) -OR- <u>NO MR RECEIVED IN EVENT 3</u> <--- J10.3 (R/C = 21, ADD = 30, Source = 10)		
11	J10.3 (R/C = 2, ADD = 10, Source = 30) (Handover process terminates)	--->	(If MR is not received, Event 10 is repeated 1 time. If MR is still not received, no further action takes place.)		

MIL-STD-6016B

APPENDIX C

THIS PAGE INTENTIONALLY LEFT BLANK

TABLE C.4.8-6. Handover Message Transmission Sequence Link 16 to Link 11B (Sheet 1 of 3)

EVENT	JU (Address = 30)	Link 16	FJU (Address = 20)	Link 11B	RU (Address = 140)
1	Operator originates Handover J10.3 (R/C = 0, ADD = 140, Source = 30)	----->	(If RU 140 is not active, go to Event 10. Machine Receipt may be sent prior to Event 10.)		
2		<----- -----	J10.3 (R/C = 2, ADD = 30, Source = 140) M.9A (AC = 6, ADD = 30) M.10A (R/C = 0, ADD = 140) M.9E (as translated from J10.3)	----- ----->	
3			(If MR is not received, all of Event 2, Link 11B portion, is repeated 6 times. If still no response, go to Event 10. The received MR is not forwarded.)	<-----	M.10A (R/C = 2, ADD = 30) (May make other response in lieu of R/C = 2)
4				<-----	CANTCO or CANTPRO M.10A (R/C = 6 or 7, ADD = 30, TN-2 = 140) (If R/C = 7, set AMP value as appropriate.)

TABLE C.4.8-6. Handover Message Transmission Sequence Link 16 to Link 11B (Sheet 2 of 3)

EVENT	JU (Address = 30)	Link 16	FJU (Address = 20)	Link 11B	RU (Address = 140)
5		----- <---	M.10A (R/C = 2, ADD = 140) ----- J10.3 (R/C = 6, 7 or 16-19; ADD = 30; Source = 140) (CANTPRO values as determined from CANTPRO AMP)	---> -----	
6	J10.3 (R/C = 2, ADD = 140, Source = 30) (Handover process terminates)	--->	(If MR is not received, the Link 16 portion of Event 5 is repeated 1 time. If MR is still not received, no further action takes place.)		
7				<---	WILCO M.10A (R/C = 3, ADD = 30, TN-2 = 140) M.9E (as appropriate)
8		----- <---	M.10A (R/C = 2, ADD = 140) ----- J10.3 (R/C = 3, ADD 30, Source = 140)	---> -----	(If MR is not received, Event 7 is repeated 6 times.)

TABLE C.4.8-6. Handover Message Transmission Sequence Link 16 to Link 11B (Sheet 3 of 3)

EVENT	JU (Address = 30)	Link 16	FJU (Address = 20)	Link 11B	RU (Address = 140)
9	J10.3 (R/C = 2, ADD = 140, Source = 30) (Direct aircraft to shift to RU 140's control)	--->	(If MR is not received, Event 8, transmission of J10.3 is repeated 1 time. If MR is still not received, no further action takes place.)		(When aircraft control is established, commence reporting M.9A (AC = 6) message.)
10		<--- <---	<u>RU 140 IS INACTIVE</u> J10.3 (R/C = 20, ADD = 30, Source = 140) -OR- <u>NO MR RECEIVED IN EVENT 3</u> J10.3 (R/C = 21, ADD = 30, Source = 140)		
11	J10.3 (R/C = 2, ADD = 140, Source = 30) (Handover process terminates)	--->	(If MR is not received, Event 10 is repeated 1 time. If MR is still not received, no further action takes place.)		

MIL-STD-6016B

APPENDIX C

THIS PAGE INTENTIONALLY LEFT BLANK

TABLE C.4.8-7. Handover Message Transmission Sequence Link 11B to Link 16 (Sheet 1 of 3)

EVENT	RU (Address = 140)	Link 11B	FJU (Address = 20)	Link 16	JU (Address = 30)
1	Operator originates Handover M.9A (AC = 6, ADD = 140) M.10A (R/C = 0, ADD = 30) M.9E (as appropriate) M.11B or M.11C (system option) (For certain Handover values, a J9.0 would be forwarded. See Command Message sequences for response sequence.)	----->	(If JU 30 is not active go to Event 10. Machine Receipt may be sent prior to Event 10.)		
2	(If MR is not received, Event 1 is repeated 6 times.)	<----- -----	M.10A (R/C = 2, ADD = 140) ----- J10.5 (Source = 140) J10.3 (R/C = 0, ADD = 30, Source = 140) J13.2 (if M.11B or M.11C is received)	----- ----->	
3			(If MR or other reply not received, Event 2, transmis- sion of J10.3 is repeated 1 time. If still no response, go to Event 10. The received MR is not forwarded.)	<-----	J10.3 (R/C = 2, ADD = 140, Source = 30) (May make other response in lieu of R/C = 2)
4				<-----	CANTCO or CANTPRO J10.3 (R/C = 6, 7, or 16-19, ADD = 140; Source = 30)

TABLE C.4.8-7. Handover Message Transmission Sequence Link 11B to Link 16 (Sheet 2 of 3)

EVENT	RU (Address = 140)	Link 11B	FJU (Address = 20)	Link 16	JU (Address = 30)
5		----- <---	J10.3 (R/C = 2, ADD = 30, Source = 140) ----- M.10A (R/C = 6 or 7, ADD = 140, TN-2 = 30) (If R/C = 7, add appropriate AMP value.)	---> -----	(If no MR is received, Event 4 is repeated 1 time.)
6	M.10A (R/C = 2, ADD = 30) (Handover process terminates)	---	> (If MR is not received, Link 11B portion of Event 5 is repeated 6 times. If MR is still not received, no further action takes place.)		
7				<---	WILCO J10.3 (R/C = 3, ADD = 140, Source = 30)
8		----- <---	J10.3 (R/C = 2, ADD = 30, Source = 140) ----- M.10A (R/C = 3, ADD = 140, TN-2 = 30)	---> -----	(If MR is not received, Event 7 is repeated 1 time.)

TABLE C.4.8-7. Handover Message Transmission Sequence Link 11B to Link 16 (Sheet 3 of 3)

EVENT	RU (Address = 140)	Link 11B	FJU (Address = 20)	Link 16	JU (Address = 30)
9	M.10A (R/C = 2, ADD = 30) (Direct aircraft to shift to JU 30's control)	--->	(If MR is not received, Event 8 is repeated 6 times. If MR is still not received, no further action takes place.)		(When aircraft control is established, commence reporting J10.5 messages.)
10		<--- <---	<u>JU 30 IS INACTIVE</u> M.10A (R/C = 7, AMP = 5, ADD = 140, TN-2 = 30) -OR- <u>NO MR RECEIVED IN EVENT 3</u> M.10A (R/C = 7, AMP = 6, ADD = 140, TN-2 = 30) (Note that TN-2 is set to 30 by the originating FJU in both of the above cases.)		
11	M.10A (R/C = 2, ADD = 30) (Handover process terminates)	--->	(If MR is not received, Event 10 is repeated 6 times. If MR is still not received, no further action takes place.)		

MIL-STD-6016B

APPENDIX C

THIS PAGE INTENTIONALLY LEFT BLANK

TABLE C.4.8-8. Handover Message Transmission Sequence Link 11 to Link 16 (Sheet 1 of 3)

EVENT	PU (Address = 10)	Link 11	FJU (Address = 20)	Link 16	JU (Address = 30)
1	Operator originates Handover M.1's (ADD = 10) M.9A (AC = 6, ADD = 10) M.10A (R/C = 0, ADD = 30) M.9E (as appropriate) M.11B or M.11C (system option) (For certain Handover values, a J9.0 would be forwarded. See Command Message sequences for response sequence.)	----->	(If JU 30 is not active, go to Event 10. Machine Receipt may be sent prior to Event 10.)		
2	(If MR or other reply is not received, Event 1 is repeated 6 times.)	<----- -----	M.1's (ADD = 20) M.1's (ADD = 30) M.10A (R/C = 2, ADD = 10) ----- J10.5 (Source = 10) J10.3 (R/C = 0, ADD = 30, Source = 10) J13.2 (if M.11B or M.11C received)	----- ----->	
3			(If MR or other reply not received, Event 2, transmission of J10.3 is repeated 1 time. If still no response, go to Event 12. The received MR is not forwarded.)	<-----	J10.3 (R/C = 2, ADD = 10, Source = 30) (May make other reply in lieu of R/C = 2)
4				<-----	CANTCO or CANTPRO J10.3 (R/C = 6, 7, or 16-19, ADD = 10; Source = 30)

TABLE C.4.8-8. Handover Message Transmission Sequence Link 11 to Link 16 (Sheet 2 of 3)

EVENT	PU (Address = 10)	Link 11	FJU (Address = 20)	Link 16	JU (Address = 30)
5		----- <--- M.1's (ADD = 20) M.1's (ADD = 30) M.10A (R/C = 6 or 7, ADD = 10) (If R/C = 7, add appropriate AMP value.)	J10.3 (R/C = 2, ADD = 30, Source = 10) -----	---> -----	(If MR is not received, Event 4 is repeated 1 time.)
6	M.1's (ADD = 10) M.10A (R/C = 2, ADD = 30) (Handover process terminates)	--->	(If MR is not received, Link 11 portion of Event 5 is repeated 6 times. If MR is still not received, no further action takes place.)		
7				<---	WILCO J10.3 (R/C = 3, ADD = 10, Source = 30)
8		----- <--- M.1's (ADD = 20) M.1's (ADD = 30) M.10A (R/C = 3, ADD = 10)	J10.3 (R/C = 2, ADD = 30, Source = 10) -----	---> -----	(If MR is not received, Event 7 is repeated 1 time.)
9	M.1's (ADD = 10) M.10A (R/C = 2, ADD = 30) (Direct aircraft to shift to JU 30's control)	--->	(If MR is not received, Event 8 is repeated 6 times. If MR is still not received, no further action takes place.)		(When aircraft control is established, commence reporting J10.5 messages.)

TABLE C.4.8-8. Handover Message Transmission Sequence Link 11 to Link 16 (Sheet 3 of 3)

EVENT	PU (Address = 10)	Link 11	FJU (Address = 20)	Link 16	JU (Address = 30)
10		<---	<u>JU 30 IS INACTIVE</u> M.1's (ADD = 20) M.10A (R/C = 7, AMP = 5, ADD = 10)		
11	M.1's (ADD = 10) M.10A (R/C = 2, ADD = 20) (Handover process terminates)	--->	(If MR is not received, Event 10 is repeated 6 times. If MR is still not received, no further action takes place.)		
12		<---	<u>NO MR RECEIVED IN EVENT 3</u> M.1's (ADD = 20) M.1's (ADD = 30) M.10A (R/C = 7, AMP = 6, ADD = 10)		
13	M.1's (ADD = 10) M.10A (R/C = 2, ADD = 30) (Handover process terminates)	--->	(If MR is not received, Event 12 is repeated 6 times. If MR is still not received, no further action takes place.)		

MIL-STD-6016B

APPENDIX C

THIS PAGE INTENTIONALLY LEFT BLANK

APPENDIX C

C.4.8.5 ELECTRONIC WARFARE DATA FORWARDING

The Link 16 EW data messages, J3.7 (EW Product Information) and J14.0 (EW Parametric Information), include many identical fields and are used for essentially the same purpose. The J14.0 has certain additional fields for reporting more detailed parametric information, equivalent to the M.6C and M.86C Link 11/11B messages. The primary difference between the messages is that the J14.0 is used to exchange a great deal of raw, unevaluated data on the Link 16 EW Network PG, whereas the J3.7 is used only to report selected evaluated data on the Surveillance Network PG. In order to prevent overloading Link 11/11B and still provide for forwarding of parametric data and variable routing of PU/RU data to the Link 16 Network when appropriate, FJUs must have operator selectable controls that allow selection of one of the modes of EW data forwarding that are described below. In any mode, all translatable J14.2 and M.6D messages shall be forwarded.

a. Link 16 to Link 11/11B:

(1) All: Forward J3.7 and J14.0 messages as prescribed in sections C.5.1 and C.5.2. In this mode, the FJU for the EW Network PG must, as a minimum, receive the Surveillance Network PG. The FJU shall not forward any J14.0 containing a Reference TN currently being reported on the Surveillance Network PG except that if the J14.0 includes a J14.0C4 word, an M.6C or M.6C/M.86C shall be forwarded. If a J14.0 is being forwarded and a J3.7 is subsequently received for that Reference TN, the FJU shall discontinue forwarding the J14.0, unless it includes the J14.0C4, in which case only M.6C or M.6C/M.86C messages shall be forwarded for the J14.0.

(2) Product: Forward only J3.7 messages. Do not forward J14.0 messages.

b. Link 11/11B to Link 16:

(1) All: Forward all J3.7 and J14.0 messages resulting from Link 11/11B messages, as prescribed in sections C.5.1 and C.5.2, on to the appropriate network. Simulated M.6 messages shall not be forwarded as J14.0 messages.

APPENDIX C

(2) Parametric: Forward only J14.0 messages resulting from Link 11/11B messages. Do not transmit J3.7 messages resulting from translation. In this mode, the Link 11/11B PU/RU data are integrated into the EW Network PG data. They are released to the Surveillance Network only after evaluation and selection by designated JUs, in the same manner as other J14.0 data. Simulated M.6 messages shall not be forwarded in this mode.

C.4.8.6 FORWARDING SIMULATED DATA

The protocols for the forwarding of simulated data are as follows:

C.4.8.6.1 LINK 16 TO LINK 11

Simulated data, including nonC² JU PPLI, track, point, bearing, fix or AOP data, shall be forwarded to Link 11 by transmitting an M.9A(AC=0) message with the Simulation Indicator set to value 1 (SI=1) preceding each simulated data report transmitted. The M.9A(AC=0, SI=1) is not acknowledged on Link 11. The M.9A(AC=0, SI=0) message is not transmitted on Link 11. If an M.9A(AC=5) Track Alert Report is required to precede a simulated data report, the M.9A(AC=0, SI=1) shall follow the M.9A(AC=5).

Simulated C² JUs' PPLIs shall be forwarded to Link 11 with the Simulation Indicator, 1 set to value 1 in the forwarded M.1 message.

C.4.8.6.2 LINK 16 TO LINK 11B

Simulated data shall be forwarded to Link 11B by setting SI=1 in the M.9A(AC=0) Data Source Reports required by normal Link 11B rules, complying with the normal Link 11B rules for transmission and acknowledgement of M.9A(AC=0) Data Source Reports. An FJU must retain the simulation status of all JUs, tracks, points, bearings, fixes, and AOPs being forwarded to Link 11B.

C.4.8.6.3 LINK 11/11B TO LINK 16

Simulated data are forwarded to Link 16 by setting the Simulation Indicator to value 1 (SI=1) in the Link 16 Indirect PPLI, track, point, bearing, fix,

APPENDIX C

or AOP reports. An FJU must retain the simulation status of all tracks, points, bearings, fixes, and AOPs being forwarded from Link 11B to Link 16 in order to determine the proper setting of the Link 16 Simulation Indicator.

C.4.8.6.4 FJU SIMULATION FILTER

FJUs shall have an operator selectable simulation transmit filter to inhibit the forwarding of simulated data from Link 16 to Link 11 and each Link 11B link. This filter is required to prevent the transmission of simulated data to any link on which any unit is not capable of recognizing simulated data and should be carefully controlled by coordinated filters. Track Alert (Emergency or Force Tell Indicator = 1) shall not force simulated data through the simulation filter.

C.4.9 MESSAGE AND WORD NUMBERING CONVENTIONS

The following numbering conventions are defined to identify the fixed format messages and words.

C.4.9.1 LINK 16 (J-SERIES)C.4.9.1.1 MESSAGE

Jn.m is the numbering convention for a Link 16 message, i.e., a combination of one initial word and any legal combination of extension and continuation words, where n is the Label, Link 16 field value and 0 is less than or equal to n is less than or equal to 31, and m is the Sublabel, Link 16 field value and 0 is less than or equal to m is less than or equal to 7.

For example, J3.2 is the numbering convention for the Air Track message.

C.4.9.1.2 BASIC MESSAGE

Jn.mB is the numbering convention for a Link 16 Basic message, i.e., a combination of an initial word and all extension words that make up a minimum length message as defined in the Transmit and Receive (T/R) rules for the message.

APPENDIX C

For example, J3.2B is the numbering convention for the Air Track Basic message consisting of the J3.2I Air Track initial word and the J3.2E0 Air Track extension word.

C.4.9.1.3 INITIAL WORD

Jn.mI is the numbering convention for the initial word for a Jn.m message.

For example, J3.2I is the numbering convention for the initial word for the J3.2 Air Track message.

C.4.9.1.4 EXTENSION WORD

Jn.mEx is the numbering convention for the extension word x for the Jn.m message, where x is a decimal number from 0 through the limitation imposed by the Message Length Indicator (MLI) field.

For example, J3.2E0 is the numbering convention for the first extension word for the J3.2 Air Track message.

C.4.9.1.5 CONTINUATION WORD

Jn.mCx is the numbering convention for the continuation word x for the Jn.m message, where x is a decimal number from 0 through 31.

For example, J3.2C1 is the numbering convention for the first continuation word for the J3.2 Air Track message.

C.4.9.1.6 LINK 16 MESSAGE LABELING SCHEME

Table C.4.9-1 lists the Link 16 message titles under this labeling scheme.

C.4.9.2 LINK 11/11B (M-SERIES)

APPENDIX C

C.4.9.2.1 MESSAGE

M.xy defines a Link 11/11B message, where x is a decimal number from 0 through 15 and represents the label, and y is an alphabetical character representing the sublabel. The exception to this is an amplifying message (always "8") followed by the label and sublabel of the message which must immediately precede the amplifying message. Table C.4.9-2 lists the Link 11/11B messages.

MIL-STD-6016B

APPENDIX C

THIS PAGE INTENTIONALLY LEFT BLANK

TABLE C.4.9-1. JTIDS/MIDS Messages

Jn.m n	m	0	1	2	3	4	5	6	7
0-NETWORK MANAGEMENT		INITIAL ENTRY	TEST	NETWORK TIME UPDATE	TIME SLOT ASSIGNMENT	RADIO RELAY CONTROL	REPROMULGATIO N RELAY	COMMUNICATIONS CONTROL	DISTRIBUTED RESERVATION ANNOUNCEMENT
1-NETWORK MANAGEMENT		CONNECTIVITY INTERROGATION	CONNECTIVITY STATUS	ROUTE ESTABLISHMENT	ACKNOWLEDGEMENT	COMMUNICANT STATUS	NET CONTROL INITIALIZATIO N	NEEDLINE PARTICIPATION GROUP ASSIGNMENT	
2-PRECISE PARTICIPANT LOCATION AND IDENTIFICATION		INDIRECT INTERFACE UNIT		AIR	SURFACE (MARITIME)	SUBSURFACE (MARITIME)	LAND (GROUND) POINT	LAND (GROUND) TRACK	
3-SURVEILLANCE		REFERENCE POINT	EMERGENCY POINT	AIR TRACK	SURFACE (MARITIME) TRACK	SUBSURFACE (MARITIME) TRACK	LAND (GROUND) POINT/TRACK	SPACE TRACK	ELECTRONIC WARFARE PRODUCT INFORMATION
4-UNUSED									
5-ASW						ACOUSTIC BEARING/ RANGE			
6-AMPLIFICATION		AMPLIFICATION INFORMATION							
7-INFORMATION MANAGEMENT		TRACK MANAGEMENT	DATA UPDATE REQUEST	CORRELATION	POINTER	TRACK IDENTIFIER	IFF/SIF MANAGEMENT	FILTER MANAGEMENT	ASSOCIATION
8-INFORMATION MANAGEMENT		UNIT DESIGNATOR	MISSION CORRELATOR CHANGE						
9-WEAPONS COORDINATION AND MANAGEMENT		COMMAND	ENGAGEMENT COORDINATION						
10-WEAPONS COORDINATION AND MANAGEMENT				ENGAGEMENT STATUS	HANDOVER		CONTROLLING UNIT REPORT	PAIRING	
11-UNUSED									
12-CONTROL		MISSION ASSIGNMENT	VECTOR	PRECISION AIRCRAFT DIRECTION	FLIGHT PATH	CONTROLLING UNIT CHANGE	TARGET/TRACK CORRELATION	TARGET SORTING	TARGET BEARING
13-PLATFORM AND SYSTEM STATUS		AIRFIELD		AIR	SURFACE (MARITIME)	SUBSURFACE (MARITIME)	LAND (GROUND)		
14-CONTROL		PARAMETRIC INFORMATION		EW CONTROL/ COORDINATION					
15-THREAT WARNING		THREAT WARNING							
16-U.S. NAVY (RESERVED)									
17-MISCELLANEOUS		WEATHER OVER TARGET							
18-27 - UNUSED									
28-NATIONAL USE		U.S. NATIONAL 1 (ARMY)	U.S. NATIONAL 2 (NAVY)	U.S. NATIONAL 3 (AIR FORCE)	U.S. NATIONAL 4 (MARINE CORPS)	FR NATIONAL 1	FR NATIONAL 2	U.S. NATIONAL 5 (NSA)	U.K. NATIONAL
29-NATIONAL USE (RESERVED)									
30-NATIONAL USE (RESERVED)									
31-MISCELLANEOUS		OVER-THE-AIR REKEYING MANAGEMENT	OVER-THE-AIR REKEYING						NO STATEMENT
RTT - ROUND-TRIP-TIMING		RTT INTERROGATION ADDRESSED	RTT INTERROGATION BROADCAST	RTT REPLY					

MIL-STD-6016B

APPENDIX C

THIS PAGE INTENTIONALLY LEFT BLANK

APPENDIX C

TABLE C.4.9-2. Link 11/11B Messages (Sheet 1 of 2)

<u>M.xy</u>	<u>Message</u>
M.0	Test Message
M.1	Data Reference Position Message
M.81	Data Reference Position Amplify Message
M.2	Air Track Position Message
M.82	Air Position Amplify Message
M.3	Surface Track Position Message
M.83	Surface Position Amplify Message
M.4A	ASW Primary Message
M.84A	ASW Amplify Message
M.4B	ASW Secondary Message
M.4C	ASW Primary Acoustic Message
M.84C	ASW Primary Acoustic Amplify Message
M.4D	ASW Bearing Message
M.84D	ASW Bearing Amplify Message
M.5	Special Points Position Message
M.85	Special Points Amplify Message
M.6A	EA Intercept Data Message
M.6B	Electronic Warfare Support (ES) Primary Message
M.86B	Electronic Warfare Support Amplify Message
M.6C	Electronic Warfare Support Parametric Message
M.86C	Electronic Warfare Support Parametric Amplify Message
M.6D	Electronic Warfare Coordination and Control Message
M.86D	Electronic Warfare Coordination and Control Amplify Message
M.9A	Management Message (Information)
M.9B	Management Message (Pairing/Association/Correlation)

APPENDIX C

TABLE C.4.9-2. Link 11/11B Messages (Sheet 2 of 2)

<u>M.xy</u>	<u>Message</u>
M.9C	Management Message (Pointer)
M.9D	Management Message (Link 11 Monitor)
M.9E	Management Message (Supporting Information)
M.9F(0)	(ACT=0) Area of Probability Basic Message
M.89F(0)	(ACT=0) Area of Probability Basic Amplify Message
M.9F(1)	(ACT=1) Area of Probability Secondary Message
M.9G	Data Link Reference Point Position Message
M.10A	Aircraft Control Message
M.11B	Aircraft Mission Status Message
M.11C	ASW Aircraft Status Message
M.11D	IFF/SIF Message
M.11M	EW/Intelligence Message
M.811M	EW/Intelligence Amplify Message
M.12	National Message
M.12.31	Timing Message
M.13	National Message
M.14	Weapon/Engagement Status Message
M.15	Command Message

APPENDIX C

C.5 DETAILED REQUIREMENTS

C.5.1 MESSAGE TRANSLATION REQUIREMENTS

C.5.1.1 GENERAL

This section identifies the message translation requirements to be satisfied by FJUs. This includes an evaluation of messages or message sequences, message contents, link protocols, and message exchange rules. Message translations are provided for each translatable message or message sequence.

C.5.1.2 DETAILED DESCRIPTION OF CONTENTS

This section contains message translations that depict actions required by the FJU for forwarding on one data link due to a particular message being received on another link. These translations are presented as follows:

- a. Message translations for each Link 16 message sequence to a Link 11/11B message or message sequence.
- b. Message translations for each Link 11/11B message or message sequence to a Link 16 message or message sequence.

For each message translation the following sets of information are provided:

- a. Message Translation Trees:
 - (1) Test node diagrams.
 - (2) Test node conditions.
 - (3) Required actions.
 - (4) Notes.
- b. Related Messages.

APPENDIX C

c. Forwarding Transmit Requirements.

d. Data Retention Rules.

C.5.1.2.1 MESSAGE TRANSLATION TREES

A message translation tree is a logical set of conditions depicting how a received message or message sequence is to be tested to determine the appropriate translation and action to be taken. This logic is not intended to direct system design. But the end result, however accomplished, shall be in consonance with required actions depicted in the translation tree. The title at the top of each message translation tree identifies the input message or message sequence for which the tree applies. All required actions and notes refer only to forwarding requirements, not to actions to be taken on the link from which the message is received.

C.5.1.2.1.1 BASIC TRANSLATION CRITERIA

The inputs to a message translation tree are messages received from either the Link 16 or Link 11/11B links that satisfy certain basic criteria. These criteria include such considerations as filters, reporting responsibility determination, and data source determination.

Each message translation tree contains four parts: a test node diagram, test node condition, required actions, and notes.

C.5.1.2.1.2 TEST NODE DIAGRAM AND CONDITIONS

The test node diagram, with conditions, represents binary conditions that must be considered to translate a message. Test nodes that are the same and that appear at different places in the tree are identified by the same test node number and, when possible, appear on the same line. Thus, by processing through the test nodes of a test node diagram, a unique branch that leads to a set of required actions is provided.

APPENDIX C

C.5.1.2.1.3 REQUIRED ACTIONS

The required actions accomplish several functions while collectively identifying all possible options for a given translation. A forwarder shall process the complete received message or message sequence in accordance with the appropriate translation tree, prior to taking any forwarding action. This process will eliminate the possibility of the forwarder originating unnecessary duplicate messages as each 'Required Action' of the Test Node Diagram is being considered. For example, a required action may be to "FWD initial sequence," such as an M.2/M.82 message sequence. Continuing to a subsequent node may result in another "FWD M.2/M.82 initial sequence" and "FWD M.9A(AC=5)." The cumulative set of messages in this example consists of an M.9A(AC=5)/M.2/M.82 message sequence. The action also may identify data that must be retained to satisfy the Link 11/11B/16 protocols and the changes that should be made or flags that should be set to assure that duplicate messages are detected, periodic transmissions are accomplished, subsequent messages are processed, and purging requirements are supported.

When the required action is to forward from one link to another, the abbreviation FWD is used.

When the required action is to transmit on to the received link, the phrase "SET INDICATOR TO TRANSMIT ..." is used.

When a required action results in a message being generated, the FJU shall perform the required data element translation described in section C.5.2.

C.5.1.2.1.4 NOTES

The notes provide additional information or clarification about a test node condition and/or required action.

C.5.1.2.2 RELATED MESSAGES

The related message section provides all the message(s) that can be transmitted as a result of the receipt of a message or message sequence from the other link.

APPENDIX C

C.5.1.2.3 FORWARDING TRANSMIT REQUIREMENTS

The transmit requirements for those messages generated as a result of required actions comply with the protocols of the Link 16 and Link 11/11B links as appropriate. Examples are:

- a. The FJU must maintain a count of the number of times to transmit redundant messages.
- b. The FJU must know how frequently periodic messages are required to be transmitted.

C.5.1.2.4 DATA RETENTION RULES

The data retention rules pertain only to the data forwarding function of an FJU and identify data that must be maintained for proper data transfer over multi-TDL interfaces. Upon completion of all data forwarding functions associated with receipt of the listed message including receipt/compliance and redundant transmissions, data may be purged when data retention rules are not specified. Message specific retention rules are specified in section C.5.1 after the Notes and Forwarding Transmit Requirements. General retention rules and minimum retention times for periodically transmitted messages are specified in the following paragraphs.

C.5.1.2.4.1 GENERAL RETENTION RULES

The following general retention rules apply to all messages:

- o An FJU shall retain the TN of all inactive PUs, RUs, and C² JUs for whom data are normally forwarded.
- o An FJU shall retain the simulation status of all JUs, tracks, points, bearings, fixes, and AOPs being forwarded to Link 11B.
- o An FJU shall retain the simulation status of all tracks, points, bearings, fixes, and AOPs being forwarded from Link 11B to Link 16.

APPENDIX C

- o An FJU shall retain the special processing status of all tracks, points, bearings, fixes, and AOPs being forwarded to or from Link 11B.
- o If the Link 16 TN being forwarded is greater than 07777 (octal), the TN association of Link 16 to Link 11/11B shall be retained.
- o An FJU may purge all data on a track or point upon receipt of a drop track report on that track or point from the R² unit.
- o When a unit for whom the FJU has been forwarding data is no longer an active source, the FJU may purge all data previously received from that unit.

C.5.1.2.4.2 MINIMUM RETENTION TIMES

The FJU may purge all data on periodically updated tracks/points/messages after the following minimum retention times:

- o If a positional update/test message/PPLI has not been received from a PU, RU, SU, or JU for 60 seconds.
- o If a real-time Air track has not been updated within 60 seconds.
- o If a real-time Surface (Maritime) track, Subsurface (Maritime) track, or Land (Ground) track or point has not been updated within 90 seconds. FJUs that purge a land (ground) point shall transmit an M.9A(AC=4) Drop Track Report onto Link 11/11B with the source set to the TN of the JU originator of the point.
- o If a nonreal-time Air track has not been updated within 150 seconds.
- o If a nonreal-time Surface (Maritime), Subsurface (Maritime), or Land (Ground) track has not been updated within 360 seconds.

APPENDIX C

- o If an Emergency Point has not been updated within 60 seconds. FJUs that purge an Emergency Point shall transmit an M.9A(AC=4) Drop Track Report onto Link 11/11B with the source set to the TN of the JU originator of the point.
- o If a Reference Point has not been updated within 360 seconds. FJUs that purge a Reference Point shall transmit an M.9A(AC=4) Drop Track Report onto Link 11/11B with the source set to the TN of the JU originator of the point.

C.5.1.3 TECHNICALLY ILLEGAL/INVALID MESSAGE/MESSAGE SEQUENCE DETERMINATION

The FJU shall perform preliminary checks on all received messages for both validity and legality as defined by MIL-STD-6016 and/or MIL-STD-6011C.

C.5.1.3.1 GENERAL

The FJU shall evaluate received data for uncorrected errors on Link 16 or detected errors on Link 11/11B and make appropriate decisions to forward or discard the data. The forwarding function shall have the following provisions for routing messages between Link 16 and Link 11/11B as a result of link error detection and correction procedures.

- a. J-Series and M-Series information shall be forwarded if it is received with no detected errors.
- b. J-Series information shall be forwarded if it is received with detected errors and the errors were corrected.
- c. J-Series information shall not be forwarded if it is received with uncorrectable errors.
- d. M-Series information shall not be forwarded if it is received with detected errors. However, if only one of the two M.1 messages from Link 11 is valid and is from an already established Link 11 unit, the valid message and the following data report shall be accepted for forwarding.

APPENDIX C

C.5.1.3.2 TECHNICALLY ILLEGAL/INVALID EXAMPLES

The following are provided as examples of illegal/invalid messages and message sequences and are not intended to be all inclusive.

a. A received Link 16 Basic message that does not include its extension word i.e., J2.0, J2.2, J2.3, J2.5, J2.6, J3.1, J3.2, or J3.3.

b. A message received with a bit field set to an "ILLEGAL" or "NOT USED" value, unless otherwise specified in Section C.5.2. This check may be limited to those fields that the FJU translates to forward the received message.

c. A message which must be addressed to a specific unit with the Addressee TN set to "NO STATEMENT" or "Collective Address."

d. Receipt of improper message sequences, such as:

- o An M.8x message without a preceding message to amplify.
- o On Link 11, a message sequence without an M.1 message.
- o On Link 16, a message without an initial word.
- o A continuation word followed by an extension word.

e. A received Link 16 track message that does not include a position, i.e., either 0.0103, 0.0051, or 0.0013 Minute Latitude or 0.0103, 0.0051, or 0.0013 Minute Longitude is set to No Statement in a J2.0, J2.2, J2.3, J2.4, J2.5, J2.6, J3.0, J3.1, J3.2, J3.3, J3.4, or J3.5 message.

f. The following Link 16 messages with Reference TN set to No Statement: J3.0, J3.1, J3.2, J3.3, J3.4, J3.5, J3.7, J5.4, J6.0, J7.0 (except ACT = 6), J7.1 (ACT = 1), J7.4, J7.5, J10.2, J10.3, J10.5, J10.6, J13.2, J13.3, J13.4, J13.5, and J14.0 message.

MIL-STD-6016B

APPENDIX C

THIS PAGE INTENTIONALLY LEFT BLANK

TABLE C.5.1-Jx. J Series to Link 11/11B Message Translation Tree

TEST NODE DIAGRAM		TEST NODE CONDITION	NOTES
		1. RECEIVED MESSAGE IS J0 SERIES, J1 SERIES, J3.6, J7.6, J8.0, J8.1, J9.1, J12 SERIES, J13.0, J15.0, J17.0, J20 SERIES, J28 SERIES, J29 SERIES, J30 SERIES, J31 SERIES, OR RTT SERIES.	
		REQUIRED ACTION	
A B Z		A. DISCARD MESSAGE. B. GO TO APPROPRIATE MESSAGE TRANSLATION TREE. Z. END TRANSLATION.	

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

C-67

APPENDIX C

MIL-STD-6016B

TABLE C.5.1-J2.0. J2.0 to Link 11/11B Message Translation Tree (Sheet 2 of 6)

TEST NODE DIAGRAM	TEST NODE CONDITION	NOTES
	7. POSITION HAS CHANGED. 8. SITE REPORTED HAS CHANGED. 9. UNIT TYPE HAS CHANGED. 10. ALTITUDE IS OTHER THAN UNKNOWN. 11. SPEED IS OTHER THAN NO STATEMENT. 12. NONZERO IFF/SIF IS REPORTED.	1 1 1
	REQUIRED ACTION	
I I J K K L L M M M M Z Z Z Z	I. FWD M.5. J. FWD M.81 ON LINK 11. K. MAINTAIN ACTIVE STATUS, FWD APPROPRIATE UPDATE MESSAGES. L. FWD M.11D. M. GO TO NEXT NUMERICAL TEST NODE. Z. END TRANSLATION.	

APPENDIX C

TABLE C.5.1-J2.0. J2.0 to Link 11/11B Message Translation Tree (Sheet 3 of 6)

NOTES

1. If Unit Type, altitude or speed data are available, the FJU shall transmit the M.81 message on Link 11 and the M.85 message on Link 11B.
2. On Link 11 the initial sequence is two M.1 messages followed by an M.81 message if data are available, followed by an M.5 message. On Link 11B the initial sequence is M.9A(AC=0) and M.5 messages followed by an M.85 message if data are available.
3. If both the Emergency and the Force Tell Indicators have been set to "on", only the Emergency alert is transmitted on Link 11/11B. Transmission of an initial message sequence is not required if the Force Tell Indicator is changed to "on" and the Emergency alert is already being reported.
4. If the simulated unit is a C² IU being forwarded to Link 11B, the M.9A(AC=0, SI=1) message shall precede appropriate messages. If the simulated unit is a C² IU being forwarded to Link 11, the M.1(SIM=1) message shall be part of the initial sequence. (See paragraph C.4.8.6)

APPENDIX C

TABLE C.5.1-J2.0. J2.0 to Link 11/11B Message Translation Tree (Sheet 4 of 6)

RELATED MESSAGES

RECEIVED LINK 16
MESSAGE

J2.0

ALL POSSIBLE LINK 11/11B MESSAGES
THAT MAY BE REQUIRED

M.1
M.81
M.5
M.85
M.9A(AC=0, 5 OR 7)
M.11D

APPENDIX C

TABLE C.5.1-J2.0. J2.0 to Link 11/11B Message Translation Tree (Sheet 5 of 6)

FORWARDING TRANSMIT REQUIREMENTS

LINK 11

1. An M.1 message sequence shall be transmitted at each FJU transmit opportunity.
2. An M.81 message is transmitted when unit type, velocity or height/depth data are available. The M.81 message is transmitted with the initial transmit opportunity following the second M.1 message for that unit. Thereafter, the M.81 message is transmitted every fourth transmit opportunity.
3. An M.5 message shall be transmitted at the first transmit opportunity following the M.81 message or the second M.1 message as appropriate. Thereafter, the M.5 message is transmitted at every transmit opportunity.

LINK 11B

1. An M.5 message shall be transmitted with the initial sequence and thereafter, each time data change.
2. An M.85 message shall be transmitted following every M.5 message if course and speed data are available.

LINK 11/11B

1. The M.9A(AC=5) message shall be transmitted prior to each M.5 message that is transmitted when an Emergency or Force Tell alert status for the unit exists.
2. M.9A(AC=7) message will be forwarded once in each of three successive transmit opportunities.


APPENDIX C

TABLE C.5.1-J2.0. J2.0 to Link 11/11B Message Translation Tree (Sheet 6 of 6)

DATA RETENTION RULES

1. The FJU shall retain all forwardable track data on all active PUs, RUs, and C² JUs for whom data are being forwarded.
2. Timers shall be maintained on each active PU, RU, or C² JU being forwarded for proper initiation of update message sequences or Drop Track messages.

C-73



C-74

APPENDIX C

APPENDIX C

TABLE C.5.1-J2.2. J2.2 to Link 11/11B Message Translation Tree (Sheet 3 of 7)

NOTES

1. If the received J2.2 PPLI message has the Command and Control Indicator set to 0 (nonC² JU), Source Track Number 00200 (octal) or greater, or the FJU has exceeded its maximum data source capacity (see paragraph C.4.7.2), the FJU shall forward the received PPLI message(s) onto Link 11/11B as an Air Surveillance message(s). (See paragraph C.4.7.1.) When a C² JU is determined to be active, the FJU shall initiate and forward the appropriate Systems Information messages containing the unit's identification and location onto Link 11/11B. The rules and procedures describing the appropriate messages are as defined for Link 11 and Link 11B.
2. If a unit becomes active and is currently being reported on either Link 11, 11B, or 16 as an Air Surveillance track, it shall be forwarded in accordance with section C.4.7. The previously reported Air Surveillance track shall be redesignated immediately as an active Interface Unit (IU). The possibility exists that an additional Air Surveillance report(s) may be received and shall be discarded, particularly from asynchronous links.
3. If both the Emergency and Force Tell Indicators have been set to "on," only the Emergency alert will be transmitted on Link 11 and Link 11B. Transmission of an initial message sequence is not required if the Force Tell Indicator is changed to "on" and the Emergency alert is already being reported.
4. If both alerts have existed and one ceases, the remaining alert status will continue to be transmitted as an M.9A(AC=5) message and the other, if it had been forwarded, shall be terminated with an M.9A(AC=7) message. Optionally, an FJU may forward an M.9A(AC=7) message even though a previous M.9A(AC=5) message for the same alert had not been transmitted.

APPENDIX C

TABLE C.5.1-J2.2. J2.2 to Link 11/11B Message Translation Tree (Sheet 4 of 7)

NOTES (Continued)

5. When the PPLI message is forwarded in an M.1/M.5 message sequence, the M.81 amplification message is transmitted on Link 11, if appropriate, and the M.85 amplification message is transmitted on Link 11B, if appropriate.
6. If the simulated unit is a nonC² JU being forwarded to Link 11 or 11B, or a C² JU being forwarded to Link 11B, the M.9A(AC=0, SI=1) message shall precede appropriate messages. If the simulated unit is a C² JU being forwarded to Link 11, the M.1(SIM=1) message will be part of the initial sequence. (See paragraph C.4.8.6)

APPENDIX C

TABLE C.5.1-J2.2. J2.2 to Link 11/11B Message Translation Tree (Sheet 5 of 7)

RELATED MESSAGES

RECEIVED LINK 16
MESSAGE

J2.2

ALL POSSIBLE LINK 11/11B MESSAGES
THAT MAY BE REQUIRED

M.1
M.81
M.2
M.82
M.5
M.85
M.9A(AC=0, 4, 5 OR 7)
M.9E
M.11D

APPENDIX C

TABLE C.5.1-J2.2. J2.2 to Link 11/11B Message Translation Tree (Sheet 6 of 7)

FORWARDING TRANSMIT REQUIREMENTS

LINK 11

1. An M.1 message sequence shall be transmitted at each FJU transmit opportunity. When an M.81 message is being transmitted, it shall be transmitted immediately following the initial M.1 message sequence and thereafter once every four M.1 message sequences.
2. An M.5 message shall be transmitted immediately following the initial M.1 or M.1/M.81 message sequence and thereafter every FJU transmit opportunity.

LINK 11B

1. An M.5 message shall be transmitted with the initial sequence and thereafter, each time data change.
2. When data are available, an M.85 message shall be transmitted following every M.5 message.

LINK 11/11B

1. An M.9A(AC=5) message shall be transmitted prior to each M.5 message that is transmitted when an Emergency or Force Tell alert status for the unit exists.
2. Forwarding Transmit Requirements for M.2/M.82 messages are specified in Table C.5.1-J3.2.
3. The M.9A(AC=7) message will be forwarded once in each of three successive transmit opportunities.

APPENDIX C

TABLE C.5.1-J2.2. J2.2 to Link 11/11B Message Translation Tree (Sheet 7 of 7)

DATA RETENTION RULES


1. The FJU shall retain all forwardable track data on all active JUs being forwarded onto Link 11/11B.
2. Timers shall be maintained on each active JU being forwarded for proper initiation of update message sequences or Drop Track messages.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

C-81



C-82

APPENDIX C

APPENDIX C

TABLE C.5.1-J2.3. J2.3 to Link 11/11B Message Translation Tree (Sheet 3 of 7)

NOTES

1. If the received J2.3 PPLI message has the Command and Control Indicator set to 0 (nonC² JU), Source Track Number 00200 (octal) or greater, or the FJU has exceeded its maximum data source capacity (see paragraph C.4.7.2), the FJU shall forward the received PPLI message(s) onto Link 11/11B as a Surface Surveillance message(s). (See paragraph C.4.7.1.) When a C² JU is determined to be active, the FJU shall initiate and forward the appropriate Systems Information messages containing the unit's identification and location onto Link 11/11B. The rules and procedures describing the appropriate message are as defined for Link 11 and Link 11B.
2. If a unit becomes active and is currently being reported on either Link 11, 11B, or 16 as a Surface Surveillance track, it shall be forwarded in accordance with section C.4.7. The previously reported Surface Surveillance track shall immediately be redesignated as an active IU. The possibility exists that an additional Surface Surveillance report(s) may be received and shall be discarded, particularly from asynchronous links.
3. If both the Emergency and Force Tell Indicators have been set to "on," only the Emergency alert will be transmitted on Link 11 and Link 11B. Transmission of an initial message sequence is not required if the Force Tell Indicator is changed to "on" and the Emergency alert is already being reported.
4. If both alerts have existed and one ceases, the remaining alert status will continue to be transmitted as an M.9A(AC=5) message and the other, if it had been forwarded, shall be terminated with an M.9A(AC=7) message. Optionally, an FJU may forward an M.9A(AC=7) message even though a previous M.9A(AC=5) message for the same alert had not been transmitted.

APPENDIX C

TABLE C.5.1-J2.3. J2.3 to Link 11/11B Message Translation Tree (Sheet 4 of 7)

NOTES (Continued)

5. When the PPLI message is forwarded in an M.1/M.5 message sequence, the M.81 amplification message is transmitted on Link 11, if appropriate, and the M.85 amplification message is transmitted on Link 11B, if appropriate.
6. If the simulated unit is a nonC² JU being forwarded to Link 11 or 11B, or a C² JU being forwarded to Link 11B, the M.9A(AC=0, SI=1) message shall precede appropriate messages. If the simulated unit is a C² JU being forwarded to Link 11, the M.1(SIM=1) message will be part of the initial sequence. (See paragraph C.4.8.6)

APPENDIX C

TABLE C.5.1-J2.3. J2.3 to Link 11/11B Message Translation Tree (Sheet 5 of 7)

RELATED MESSAGES

RECEIVED LINK 16
MESSAGE

J2.3

ALL POSSIBLE LINK 11/11B MESSAGES
THAT MAY BE REQUIRED

M.1
M.81
M.3
M.83
M.5
M.85
M.9A(AC=0, 4, 5 OR 7)
M.9E
M.11D

APPENDIX C

TABLE C.5.1-J2.3. J2.3 to Link 11/11B Message Translation Tree (Sheet 6 of 7)

FORWARDING TRANSMIT REQUIREMENTS

LINK 11

1. An M.1 message sequence shall be transmitted at each FJU transmit opportunity. When an M.81 message is being transmitted, it shall be transmitted immediately following the initial M.1 message sequence and thereafter once every four M.1 message sequences.
2. An M.5 message shall be transmitted immediately following the initial M.1 or M.1/M.81 message sequence and thereafter every FJU transmit opportunity.

LINK 11B

1. An M.5 message shall be transmitted with the initial sequence and thereafter, each time data change.
2. When data are available, an M.85 message shall be transmitted following every M.5 message.

LINK 11/11B

1. An M.9A(AC=5) message shall be transmitted prior to each M.5 message that is transmitted when an Emergency or Force Tell alert status for the unit exists.
2. The M.9A(AC=7) will be forwarded once in each of three successive transmit opportunities.
3. Forwarding Transmit Requirements for M.3/M.83 messages are specified in Table C.5.1-J3.3.

APPENDIX C

TABLE C.5.1-J2.3. J2.3 to Link 11/11B Message Translation Tree (Sheet 7 of 7)

DATA RETENTION RULES

1. The FJU shall retain all forwardable track data on all active JUs being forwarded onto Link 11/11B.
2. Timers shall be maintained on each active JU being forwarded for proper initiation of update message sequences or Drop Track messages.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

C-89




TABLE C.5.1-J2.4. J2.4 to Link 11/11B Message Translation Tree (Sheet 2 of 7)

TEST NODE DIAGRAM		TEST NODE CONDITION	NOTES
<pre>graph TD 8[8] -- N --> 9a[9] 8 -- Y --> 9b[9] 9a -- N --> 10a[10] 9a -- Y --> 10b[10] 9b -- N --> 10c[10] 9b -- Y --> 10d[10] 10a -- N --> 11[11] 10b -- N --> 11 10c -- N --> 11 10d -- N --> 11 10d -- Y --> 11 11 -- N --> 12[12] 11 -- Y --> 13[13] 12 -- N --> 14a[14] 12 -- Y --> 14b[14] 13 -- N --> 14c[14] 13 -- Y --> 14d[14] 14a -- N --> 14e[14] 14a -- Y --> 14f[14] 14b -- N --> 14g[14] 14b -- Y --> 14h[14] 14c -- N --> 14i[14] 14c -- Y --> 14j[14] 14d -- N --> 14k[14] 14d -- Y --> 14l[14]</pre>		8. NONZERO IFF/SIF REPORTED. 9. PLATFORM DATA HAS CHANGED. 10. VOICE CALL SIGN INDICATOR = 1 AND VOICE CALL SIGN HAS CHANGED. 11. UNIT IS C2 JU. 12. REPORTED POSITION HAS CHANGED. 13. DEPTH (15 METERS/CATEGORY)/COURSE AND SPEED OTHER THAN NO STATEMENT. 14. SIMULATION INDICATOR = 1.	
		REQUIRED ACTION	
O P Q R S		0. FWD M.11D. P. FWD M.8X AMPLIFY MESSAGE. Q. FWD M.9E(AC=1). R. FWD M.1 OR M.4A OR IF APPROPRIATE M.5. S. GO TO TEST NODE 11.	1, 5 1
O P Q R S		T. FWD M.5. U. GO TO NEXT NUMERICAL TEST NODE. V. FWD M.9A(AC=0, SI=1) OR M.1(SIM=1) IF APPROPRIATE. Z. END TRANSLATION.	6

C-90

APPENDIX C

TABLE C.5.1-J2.4. J2.4 to Link 11/11B Message Translation Tree (Sheet 3 of 7)

NOTES

1. If the received J2.4 PPLI message has the Command and Control Indicator set to 0 (nonC² JU), Source Track Number 00200 (octal) or greater, or the FJU has exceeded its maximum data source capacity (see paragraph C.4.7.2), the FJU shall forward the received PPLI message(s) onto Link 11/11B as a Subsurface Surveillance message(s). (See paragraph C.4.7.1.) When a C² JU is determined to be active, the FJU shall initiate and forward the appropriate Systems Information messages containing the unit's identification and location onto Link 11/11B. The rules and procedures describing the appropriate message are as defined for Link 11 and Link 11B.
2. If a unit becomes active and is currently being reported on either Link 11, 11B, or 16 as a Subsurface Surveillance track, it shall be forwarded in accordance with section C.4.7. The previously reported Subsurface Surveillance track shall immediately be redesignated as an active IU. The possibility exists that an additional Subsurface Surveillance report(s) may be received and shall be discarded, particularly from asynchronous links.
3. If both the Emergency and Force Tell Indicators have been set to "on," only the Emergency alert will be transmitted on Link 11 and Link 11B. Transmission of an initial message sequence is not required if the Force Tell Indicator is changed to "on" and the Emergency alert is already being reported.
4. If both alerts have existed and one ceases, the remaining alert status will continue to be transmitted as an M.9A(AC=5) message and the other, if it had been forwarded, shall be terminated with an M.9A(AC=7) message. Optionally, an FJU may forward an M.9A(AC=7) message even though a previous M.9A(AC=5) message for the same alert had not been transmitted.

APPENDIX C

TABLE C.5.1-J2.4. J2.4 to Link 11/11B Message Translation Tree (Sheet 4 of 7)

NOTES (Continued)

5. When the PPLI message is forwarded in an M.1/M.5 message sequence, the M.81 amplification message is transmitted on Link 11, if appropriate, and the M.85 amplification message is transmitted on Link 11B, if appropriate.
6. If the simulated unit is a nonC² JU being forwarded to Link 11 or 11B, or a C² JU being forwarded to Link 11B, the M.9A(AC=0, SI=1) message shall precede appropriate messages. If the simulated unit is a C² JU being forwarded to Link 11, the M.1(SIM=1) message will be part of the initial sequence. (See paragraph C.4.8.6)

APPENDIX C

TABLE C.5.1-J2.4. J2.4 to Link 11/11B Message Translation Tree (Sheet 5 of 7)

RELATED MESSAGES

RECEIVED LINK 16
MESSAGE

J2.4

ALL POSSIBLE LINK 11/11B MESSAGES
THAT MAY BE REQUIRED

M.1
M.81
M.4A
M.84A
M.5
M.85
M.9A(AC=0, 4, 5 OR 7)
M.9E
M.11D

APPENDIX C

TABLE C.5.1-J2.4. J2.4 to Link 11/11B Message Translation Tree (Sheet 6 of 7)

FORWARDING TRANSMIT REQUIREMENTS

LINK 11

1. An M.1 message sequence shall be transmitted at each FJU transmit opportunity. When an M.81 message is being transmitted, it shall be transmitted immediately following the initial M.1 message sequence and thereafter once every four M.1 message sequences.
2. An M.5 message shall be transmitted immediately following the initial M.1 or M.1/M.81 message sequence and thereafter every FJU transmit opportunity.

LINK 11B

1. An M.5 message shall be transmitted with the initial sequence and thereafter, each time data change.
2. When data are available, an M.85 message shall be transmitted following every M.5 message.

LINK 11/11B

1. An M.9A(AC=5) message shall be transmitted prior to each M.5 message that is transmitted when an Emergency or Force Tell alert status for the unit exists.
2. The M.9A(AC=7) will be forwarded once in each of three successive transmit opportunities.
3. Forwarding Transmit Requirements for M.4A/M.84A messages are specified in table C.5.1-J3.4.

APPENDIX C

TABLE C.5.1-J2.4. J2.4 to Link 11/11B Message Translation Tree (Sheet 7 of 7)

DATA RETENTION RULES


1. The FJU shall retain all forwardable track data on all active JUs being forwarded onto Link 11/11B.
2. Timers shall be maintained on each active JU being forwarded for proper initiation of update message sequences or Drop Track messages.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

C-97



C-98

MIL-STD-6016B
APPENDIX C

APPENDIX C

TABLE C.5.1-J2.5. J2.5 to Link 11/11B Message Translation Tree (Sheet 3 of 7)

NOTES

1. If the received J2.5 PPLI message has the Command and Control Indicator set to 0 (nonC² JU) or has Source Track Number 00200 (octal) or greater, the FJU shall forward the received PPLI message(s) onto Link 11/11B as a Special Points Position message(s). (See paragraph C.4.7.1.) When a C² JU is determined to be active, the FJU shall initiate and forward the appropriate Systems Information messages containing the unit's identification and location onto Link 11/11B. The rules and procedures describing the appropriate messages are as defined for Link 11 and Link 11B.
2. If a unit becomes active and is currently being reported on either Link 11, 11B, or 16, it shall be forwarded in accordance with section C.4.7. The previously reported Point shall be redesignated immediately as an active IU. The possibility exists that an additional Point report(s) may be received and shall be discarded, particularly from asynchronous links.
3. If both the Emergency and Force Tell Indicators have been set to "on," only the Emergency alert will be transmitted on Link 11 and Link 11B. Transmission of an initial message sequence is not required if the Force Tell Indicator is changed to "on" and the Emergency alert is already being reported.
4. If both alerts have existed and one ceases, the remaining alert status will continue to be transmitted as an M.9A(AC=5) message and the other, if it had been forwarded, shall be terminated with an M.9A(AC=7) message. Optionally, an FJU may forward an M.9A(AC=7) message even though a previous M.9A(AC=5) message for the same alert had not been transmitted.
5. When the PPLI message is forwarded in an M.1/M.5 message sequence, the M.81 amplification message is transmitted on Link 11, if appropriate, and the M.85 amplification message is transmitted on Link 11B, if appropriate.

APPENDIX C

TABLE C.5.1-J2.5. J2.5 to Link 11/11B Message Translation Tree (Sheet 4 of 7)

NOTES (Continued)

6. If the simulated unit is a nonC² JU being forwarded to Link 11 or 11B, or a C² JU being forwarded to Link 11B, the M.9A(AC=0, SI=1) message shall precede appropriate messages. If the simulated unit is a C² JU being forwarded to Link 11, the M.1(SIM=1) message will be part of the initial sequence. (See paragraph C.4.8.6)

APPENDIX C

TABLE C.5.1-J2.5. J2.5 to Link 11/11B Message Translation Tree (Sheet 5 of 7)

RELATED MESSAGES

RECEIVED LINK 16
MESSAGE

J2.5

ALL POSSIBLE LINK 11/11B MESSAGES
THAT MAY BE REQUIRED

M.1
M.81
M.5
M.85
M.9A(AC=0, 4, 5 OR 7)
M.9E

APPENDIX C

TABLE C.5.1-J2.5. J2.5 to Link 11/11B Message Translation Tree (Sheet 6 of 7)

FORWARDING TRANSMIT REQUIREMENTS

LINK 11

1. An M.1 message sequence shall be transmitted at each FJU transmit opportunity. When an M.81 message is being transmitted, it shall be transmitted immediately following the initial M.1 message sequence and thereafter once every four M.1 message sequences.
2. An M.5 message shall be transmitted immediately following the initial M.1 or M.1/M.81 message sequence and thereafter every FJU transmit opportunity.

LINK 11B

1. An M.5 message shall be transmitted with the initial sequence and thereafter, each time data change.
2. When data are available, an M.85 message shall be transmitted following every M.5 message.

LINK 11/11B

1. An M.9A(AC=5) message shall be transmitted prior to each M.5 message that is transmitted when an Emergency or Force Tell alert status for the unit exists.
2. The M.9A(AC=7) will be forwarded once in each of three successive transmit opportunities

APPENDIX C

TABLE C.5.1-J2.5. J2.5 to Link 11/11B Message Translation Tree (Sheet 7 of 7)

DATA RETENTION RULES

1. The FJU shall retain all forwardable track data on all active JUs being forwarded onto Link 11/11B.
2. Timers shall be maintained on each active JU being forwarded for proper initiation of update message sequences or Drop Track messages.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

C-105

APPENDIX C

TABLE C.5.1-J2.6. J2.6 to Link 11/11B Message Translation Tree (Sheet 2 of 7)

TEST NODE DIAGRAM	TEST NODE CONDITION	NOTES
<pre>graph TD 8[8] -- Y --> 9a[9] 8 -- N --> 9b[9] 9a -- Y --> 10[10] 9a -- N --> 11[11] 9b -- Y --> 10 9b -- N --> 11 10 -- Y --> 11 10 -- N --> 13a[13] 11 -- Y --> 12[12] 11 -- N --> 13b[13] 12 -- Y --> 13c[13] 12 -- N --> 13d[13] 13a -- Y --> 13e[13] 13a -- N --> 13f[13] 13b -- Y --> 13g[13] 13b -- N --> 13h[13] 13c -- Y --> 13i[13] 13c -- N --> 13j[13] 13d -- Y --> 13k[13] 13d -- N --> 13l[13] 13e -- Y --> 13m[13] 13e -- N --> 13n[13] 13f -- Y --> 13o[13] 13f -- N --> 13p[13] 13g -- Y --> 13q[13] 13g -- N --> 13r[13] 13h -- Y --> 13s[13] 13h -- N --> 13t[13] 13i -- Y --> 13u[13] 13i -- N --> 13v[13] 13j -- Y --> 13w[13] 13j -- N --> 13x[13] 13k -- Y --> 13y[13] 13k -- N --> 13z[13] 13l -- Y --> 13aa[13] 13l -- N --> 13ab[13] 13m -- Y --> 13ac[13] 13m -- N --> 13ad[13] 13n -- Y --> 13ae[13] 13n -- N --> 13af[13] 13o -- Y --> 13ag[13] 13o -- N --> 13ah[13] 13p -- Y --> 13ai[13] 13p -- N --> 13aj[13] 13q -- Y --> 13ak[13] 13q -- N --> 13al[13] 13r -- Y --> 13am[13] 13r -- N --> 13an[13] 13s -- Y --> 13ao[13] 13s -- N --> 13ap[13] 13t -- Y --> 13aq[13] 13t -- N --> 13ar[13] 13u -- Y --> 13as[13] 13u -- N --> 13at[13] 13v -- Y --> 13au[13] 13v -- N --> 13av[13] 13w -- Y --> 13aw[13] 13w -- N --> 13ax[13] 13x -- Y --> 13ay[13] 13x -- N --> 13az[13] 13y -- Y --> 13ba[13] 13y -- N --> 13bb[13] 13z -- Y --> 13bc[13] 13z -- N --> 13bd[13]</pre>	8. PLATFORM AND/OR PLATFORM ACTIVITY DATA HAS CHANGED. 9. VOICE CALL SIGN INDICATOR = 1 AND VOICE CALL SIGN HAS CHANGED. 10. UNIT IS C2 JU. 11. REPORTED POSITION HAS CHANGED. 12. ELEVATION/VELOCITY HAS CHANGED. 13. SIMULATION INDICATOR = 1.	
	REQUIRED ACTION	
0 P Q R	0. FWD M.8X AMPLIFY MESSAGE. P. FWD M.9E(AC=1). Q. FWD M.1 AND/OR M.5. R. GO TO TEST NODE 10.	1, 5 1
P Q R S T U Z	S. FWD M.5. T. GO TO NEXT NUMERICAL TEST NODE. U. FWD M.9A(AC=0, SI=1) OR M.1(SIM=1) IF APPROPRIATE. Z. END TRANSLATION.	6

C-106

APPENDIX C

TABLE C.5.1-J2.6. J2.6 to Link 11/11B Message Translation Tree (Sheet 3 of 7)

NOTES

1. If the received J2.6 PPLI message has the Command and Control Indicator set to 0 (nonC² JU) or has Source Track Number 00200 (octal) or greater, the FJU shall forward the received PPLI message(s) onto Link 11/11B as a Special Points Position message(s). (See paragraph C.4.7.1.) When a C² JU is determined to be active, the FJU shall initiate and forward the appropriate Systems Information messages containing the unit's identification and location onto Link 11/11B. The rules and procedures describing the appropriate messages are as defined for Link 11 and Link 11B.
2. If a unit becomes active and is currently being reported on either Link 11, 11B, or 16, it shall be forwarded in accordance with section C.4.7. The previously reported Point/Track shall be redesignated immediately as an active IU. The possibility exists that an additional Point/Track report(s) may be received and shall be discarded, particularly from asynchronous links.
3. If both the Emergency and Force Tell Indicators have been set to "on," only the Emergency alert will be transmitted on Link 11/11B. Transmission of an initial message sequence is not required if the Force Tell Indicator is changed to "on" and the Emergency alert is already being reported.
4. If both alerts have existed and one ceases, the remaining alert status will continue to be transmitted as an M.9A(AC=5) message and the other, if it had been forwarded, shall be terminated with an M.9A(AC=7) message. Optionally, an FJU may forward an M.9A(AC=7) message even though a previous M.9A(AC=5) message for the same alert had not been transmitted.
5. When the PPLI message is forwarded in an M.1/M.5 message sequence, the M.81 amplification message is transmitted on Link 11, if appropriate, and the M.85 amplification message is transmitted on Link 11B, if appropriate.

APPENDIX C

TABLE C.5.1-J2.6. J2.6 to Link 11/11B Message Translation Tree (Sheet 4 of 7)

NOTES (Continued)

6. If the simulated unit is a nonC² JU being forwarded to Link 11 or 11B, or a C² JU being forwarded to Link 11B, the M.9A(AC=0, SI=1) message shall precede appropriate messages. If the simulated unit is a C² JU being forwarded to Link 11, the M.1(SIM=1) message will be part of the initial sequence. (See paragraph C.4.8.6)

APPENDIX C

TABLE C.5.1-J2.6. J2.6 to Link 11/11B Message Translation Tree (Sheet 5 of 7)

RELATED MESSAGES

RECEIVED LINK 16
MESSAGE

J2.6

ALL POSSIBLE LINK 11/11B MESSAGES
THAT MAY BE REQUIRED

M.1
M.81
M.5
M.85
M.9A(AC=0, 4, 5 OR 7)
M.9E

APPENDIX C

TABLE C.5.1-J2.6. J2.6 to Link 11/11B Message Translation Tree (Sheet 6 of 7)

FORWARDING TRANSMIT REQUIREMENTS

LINK 11

1. An M.1 message sequence shall be transmitted at each FJU transmit opportunity. When an M.81 message is being transmitted, it shall be transmitted immediately following the initial M.1 message sequence and thereafter once every four M.1 message sequences.
2. An M.5 message shall be transmitted immediately following the initial M.1 or M.1/M.81 message sequence and thereafter every FJU transmit opportunity.

LINK 11B

1. An M.5 message shall be transmitted with the initial sequence and thereafter, each time data change.
2. When data are available, an M.85 message shall be transmitted following every M.5 message.

LINK 11/11B

1. An M.9A(AC=5) message shall be transmitted prior to each M.5 message that is transmitted when an Emergency or Force Tell alert status for the unit exists.
2. The M.9A(AC=7) will be forwarded once in each of three successive transmit opportunities.

APPENDIX C

TABLE C.5.1-J2.6. J2.6 to Link 11/11B Message Translation Tree (Sheet 7 of 7)

DATA RETENTION RULES

1. The FJU shall retain all forwardable track data on all active JUs being forwarded onto Link 11/11B.
2. Timers shall be maintained on each active JU being forwarded for proper initiation of update message sequences or Drop Track messages.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

C-113

APPENDIX C

MIL-STD-6016B

TABLE C.5.1-J3.0. J3.0 to Link 11/11B Message Translation Tree (Sheet 2 of 8)

TEST NODE DIAGRAM		TEST NODE CONDITION	NOTES
		8. SIMULATION INDICATOR = 1. 9. FORCE TELL INDICATOR = 1. 10. FORCE TELL INDICATOR HAS CHANGED. 11. POINT TYPE (PT) = 7 OR 8. 12. PT = 0 AND POINT AMP = 3 OR 6 AND J3.0C5 WORD INCLUDED. 13. TRACK NUMBER, RELATED 2 IS OTHER THAN NO STATEMENT. 14. SLAVED INDICATOR = 1. 15. HOUR, MINUTE, ALTITUDE, COURSE, SPEED OR TN, RELATED IS OTHER THAN NO STATEMENT.	5
		REQUIRED ACTION	
E F G H I J T Z C D C D C D C D C		C. FWD M.5. D. FWD M.85. E. FWD M.9A(AC=0, SI=1), IF APPROPRIATE. F. FWD M.9A(AC=5). G. FWD M.9A(AC=7). H. GO TO NEXT NUMERICAL TEST NODE. I. GO TO TEST NODE 11. J. GO TO TEST NODE 16. T. FWD M.9B. Z. END TRANSLATION.	2

C-114


TABLE C.5.1-J3.0. J3.0 to Link 11/11B Message Translation Tree (Sheet 3 of 8)

C-115

MIL-STD-6016B
APPENDIX C

TEST NODE DIAGRAM	TEST NODE CONDITION	NOTES
	16. PT = 7, POINT AMPLIFICATION = 0-5, OR POINT AMP = 10 AND NO J3.0C3 WORD WAS RECEIVED. 17. PT = 7, POINT AMPLIFICATION = 6 OR 13. 18. PT = 7, POINT AMPLIFICATION = 8. 19. PT = 7, POINT AMPLIFICATION = 9, OR POINT AMP = 10 AND A J3.0C3 AND/OR A J3.0C4 WORD WAS RECEIVED. 20. PT = 8, POINT AMPLIFICATION = 0 OR 1. 21. PT = 8, POINT AMPLIFICATION = 2. 22. AREA MAJOR AXIS, AREA MINOR AXIS, OR SQUARE/CIRCLE SWITCH = NO STATEMENT OR UNDEFINED. 23. TIME (HOURS/MINUTES) OTHER THAN NO STATEMENT. 24. TIME FUNCTION = 0, 1, OR 5. 25. TIME FUNCTION = 1.	
	REQUIRED ACTION	
K K A A A L L K K A A M N O P Z Z Z Z Z Z Z Z Z Z	A. DISCARD MESSAGE. K. FWD M.4A/M.84A. L. FWD M.4C/M.84C. M. FWD M.4B. N. RETAINED DATA IS COMBINED WITH FOLLOWING J3.0 HAVING REMAINING TIME DATA. O. GO TO TEST NODE 26. P. GO TO TEST NODE 27. Z. END TRANSLATION.	3 3 4

TABLE C.5.1-J3.0. J3.0 to Link 11/11B Message Translation Tree (Sheet 4 of 8)

TEST NODE DIAGRAM		TEST NODE CONDITION	NOTES
		26. TIME FUNCTION = 2. 27. COURSE, SPEED, OR TN, RELATED OTHER THAN NO STATEMENT.	
		REQUIRED ACTION	
A K M Q R S Z Z Z Z		A. DISCARD MESSAGE. K. FWD M.4A/M.84A. M. FWD M.4B. Q. FWD M.9F(AC=0)/M.89F(AC=0). R. FWD M.9F(AC=1). S. COMBINE DATA WITH PRECEDING J3.0 HAVING REMAINING TIME DATA. Z. END TRANSLATION.	3 4

APPENDIX C

TABLE C.5.1-J3.0. J3.0 to Link 11/11B Message Translation Tree (Sheet 5 of 8)

NOTES

1. J3.0 Point Types = 4-6 have no Link 11/11B equivalent, and 9-15 are Undefined. The following J3.0 Point Amplification values are Undefined or have no Link 11/11B equivalent:

<u>Point Type</u>	<u>Point Amplification</u>
0	10-15
1	10-15
2	4, 7-15
3	9-11, 13-15
7	7, 11, 14-15
8	3-15

2. The M.9A(AC=0, SI=1) message shall precede appropriate messages. (See paragraph C.4.8.6)

3. The M.4B, M.4C, and M.84C are not transmitted on Link 11B.

4. Two J3.0 messages are required to report a NOTACK Area or Friendly Weapon Danger Area (FWDA). One message contains the Time of Activation, and the other message contains the Time of Deactivation. These two times are both required to properly report a NOTACK Area or FWDA on Link 11/11B. If only one time is received, see table C.5.2-M.4A-2.

5. If the J3.0C5 contains the Missile Track Number (Related Track Number, 2 is not equal to zero) and Connect/Disconnect = 0, an M.9B (AC=6) Association message may also be transmitted to Link 11 and Link 11B showing the Missile/Point relationship. If the J3.0C5 word contains the Missile Track Number and Connect/Disconnect = 1, an M.9B (AC=15) Terminate Pairing/Association may also be transmitted on Link 11/11B.

APPENDIX C

TABLE C.5.1-J3.0. J3.0 to Link 11/11B Message Translation Tree (Sheet 6 of 8)

RELATED MESSAGES

RECEIVED LINK 16
MESSAGE

J3.0

ALL POSSIBLE LINK 11/11B MESSAGES
THAT MAY BE REQUIRED

M.4A
M.84A
M.4B
M.4C
M.84C
M.5
M.85
M.9A(AC=0, 5 OR 7)
M.9B(AC = 6 or 15)
M.9F(0)
M.89F(0)
M.9F(1)

APPENDIX C

TABLE C.5.1-J3.0. J3.0 to Link 11/11B Message Translation Tree (Sheet 7 of 8)

FORWARDING TRANSMIT REQUIREMENTS

1. When a J3.0 message is received and Point Type is equal to 7 and Point Amplification is not equal to 6 (NOTACK Area) or 13 (FWDA) then the M.4A message shall be transmitted once in each of two consecutive transmission opportunities when initiated on Link 11. The M.4A initial sequence shall be transmitted by the FJU at the first transmission opportunity and every transmission opportunity thereafter until the M.9A(AC=0) message is acknowledged on Link 11B.
2. When both J3.0 messages (J3.0 Time Function = 1, Time of Activation and 2, Time of Deactivation) are received and Point Type is equal to 7 and Point Amplification equal to 6 or 13, then the M.4A/M.84A/M.4B messages shall be transmitted once in each of seven transmission opportunities when initiated on Link 11.
3. The M.4C initial sequence shall be transmitted by the FJU once in each of two successive transmission opportunities on Link 11.
4. The M.5 initial sequence shall be transmitted by the FJU once in each of two successive transmission opportunities on Link 11. The M.5 initial sequence shall be transmitted by the FJU at the first transmission opportunity and every transmission opportunity thereafter until the M.9A(AC=0) message is acknowledged on Link 11B.
5. The M.9F(AC=0) message shall be transmitted by the FJU once in each of two successive transmission opportunities when initiated on Link 11/11B.
6. Upon receipt of the J3.0 message, one M.4A/M.84A or one M.4C/M.84C (on Link 11 only) message sequence, or one M.5 and M.85 if appropriate, or one M.9F(AC=0)/M.89F(AC=0) message sequence, whichever sequence is appropriate, shall be forwarded once in each of two successive transmission opportunities on Link 11/11B.

APPENDIX C

TABLE C.5.1-J3.0. J3.0 to Link 11/11B Message Translation Tree (Sheet 8 of 8)

FORWARDING TRANSMIT REQUIREMENTS (Continued)

7. Upon receipt of a J3.0 message, one M.5 and M.85 message if appropriate, shall be forwarded by the FJU on Link 11B.

8. On Link 11, if appropriate, the M.4B message shall be forwarded with every M.4A or M.4C message sequence combination that it amplifies for which Time (Hours and Minutes) is provided.

9. When the J3.0 message reports velocity and time and/or altitude, for a reference point, a second M.5 identical to the first shall be sent followed by a second M.85 in which the alternate parameters are included.

10. If appropriate, the M.9F(AC=1) shall be forwarded immediately following every M.9F(AC=0)/M.89F(AC=0) message combination that it amplifies.

11. The M.9A(AC=5) message, if appropriate, shall be forwarded at the same frequency as, and immediately preceding the message to which it applies. If two message pairs are being transmitted to forward one J3.0 message, the M.9A(AC=5) need not be transmitted prior to the second message pair. The M.9A(AC=5) shall be transmitted prior to the M.9A(AC=0) if both are appropriate.

12. The M.9A(AC=7) message shall be forwarded once in each of three successive transmit opportunities.

DATA RETENTION RULES

The FJU shall retain the status of the Force Tell Indicator for all reference points being forwarded.

C-121

APPENDIX C

MIL-STD-6016B

APPENDIX C

TABLE C.5.1-J3.1. J3.1 to Link 11/11B Message Translation Tree (Sheet 2 of 4)

NOTES

1. The M.9A(AC=0, SI=1) message shall precede appropriate messages. (See paragraph C.4.8.6)

APPENDIX C

TABLE C.5.1-J3.1. J3.1 to Link 11/11B Message Translation Tree (Sheet 3 of 4)

RELATED MESSAGES

RECEIVED LINK 16
MESSAGE

J3.1

ALL POSSIBLE LINK 11/11B MESSAGES
THAT MAY BE REQUIRED

M.5
M.85
M.9A(AC=0)
M.9B(AC = 6)
M.11D

APPENDIX C

TABLE C.5.1-J3.1. J3.1 to Link 11/11B Message Translation Tree (Sheet 4 of 4)

FORWARDING TRANSMIT REQUIREMENTS

1. The forwarded M.5/M.85 messages are transmitted on Link 11/11B each transmit opportunity until the emergency point is dropped.
2. The forwarded M.9B message shall be transmitted in accordance with Link 11/11B redundancy requirements.
3. Upon receipt of the J3.1C1 word with nonzero IFF/SIF data, the M.11D message(s) shall be forwarded.

DATA RETENTION RULES

The FJU shall retain current Emergency Point data on all points being forwarded.

TABLE C.5.1-J3.2. J3.2 to Link 11/11B Message Translation Tree (Sheet 1 of 6)

C-125

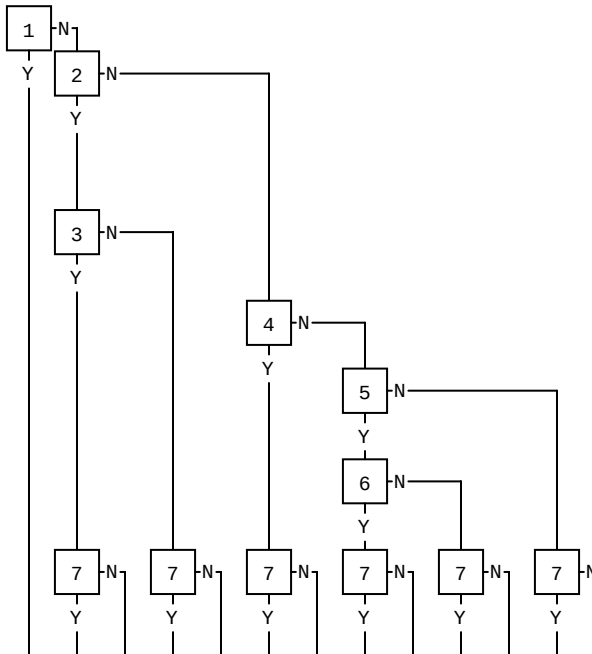
TEST NODE DIAGRAM		TEST NODE CONDITION	NOTES
		1. SIMULATION INDICATOR = 1. 2. THIS IS THE INITIAL REPORT FROM THIS DATA SOURCE, OR TRACK IS NONREAL-TIME (TQ=0), OR SPECIAL PROCESSING INDICATOR HAS CHANGED, OR FORCE TELL INDICATOR HAS CHANGED, OR EMERGENCY INDICATOR HAS CHANGED. 3. TRACK IS NONREAL-TIME (TQ=0) WITH VELOCITY NOT EQUAL TO ZERO OR VELOCITY HAS CHANGED TO ZERO. 4. ID DIFFERENCE INDICATOR HAS CHANGED FROM 1 TO 0. 5. IDENTITY, IDENTITY AMPLIFYING DESCRIPTOR, PLATFORM, AND/OR PLATFORM ACTIVITY HAS CHANGED. 6. ID DIFFERENCE INDICATOR = 1. 7. NONZERO IFF/SIF IS REPORTED.	1
		REQUIRED ACTION	2 3
A B B B B C C E E F F F F F F G G G G G Y Y Y Y Y Y Y Y Y Y Y Y		A. FWD M.9A(AC=0, SI=1), IF APPROPRIATE. B. FWD M.2/M.82 INITIAL SEQUENCE. C. FWD M.2/M.82 WITH VELOCITY. D. FWD M.2. E. FWD M.9A(AC=1, CI=0). F. FWD M.2/M.82. G. FWD M.11D(TR=0). H. FWD M.9A(AC=1, CI=1). Y. GO TO NEXT NUMERICAL TEST NODE.	

TABLE C.5.1-J3.2. J3.2 to Link 11/11B Message Translation Tree (Sheet 2 of 6)

C-126

TEST NODE DIAGRAM	TEST NODE CONDITION	NOTES
<pre>graph TD N8N --> N9R[N] N8Y --> N9L[N] N9R --> N10R[N] N9R --> N11R1[N] N9R --> N11R2[N] N9R --> N11R3[N] N9L --> N10L[N] N9L --> N11L1[N] N9L --> N11L2[N] N9L --> N11L3[N] N10R --> N11R4[N] N10R --> N11R5[N] N10R --> N11R6[N] N10L --> N11L4[N] N10L --> N11L5[N] N10L --> N11L6[N]</pre>	8. FORCE TELL INDICATOR HAS CHANGED. 9. EMERGENCY INDICATOR HAS CHANGED. 10. EMERGENCY INDICATOR = 1. 11. FORCE TELL INDICATOR = 1.	3
	REQUIRED ACTION	
I I I I I J J J J J K Z Z Z Z Z Z Z Z Z	I. FWD M.9A(AC=5) AND RETAIN ALERT STATUS (ON). J. FWD M.9A(AC=7) AND RETAIN ALERT STATUS (OFF). K. NO CHANGE TO CURRENT ALERT STATUS, CONTINUE M.9A(AC=5) AT NORMAL RATE IF APPROPRIATE. Z. END TRANSLATION.	

APPENDIX C

TABLE C.5.1-J3.2. J3.2 to Link 11/11B Message Translation Tree (Sheet 3 of 6)

NOTES

1. If the Air Platform and/or Air Platform Activity field(s) is received as No Statement and a value other than No Statement is held in the FJU database, the value held in the FJU database shall be forwarded.
2. The M.9A(AC=0, SI=1) message shall precede appropriate messages. (See paragraph C.4.8.6)
3. If both Emergency and Force Tell Indicators have been set to "on," only the Emergency alert is transmitted on Link 11/11B. Transmission of an initial message sequence is not required if the Force Tell Indicator is changed to "on" and the Emergency alert is already being reported.

APPENDIX C

TABLE C.5.1-J3.2. J3.2 to Link 11/11B Message Translation Tree (Sheet 4 of 6)

RELATED MESSAGES

RECEIVED LINK 16
MESSAGE

J3.2

ALL POSSIBLE LINK 11/11B MESSAGES
THAT MAY BE REQUIRED

M.2

M.82

M.9A(AC=0, 1, 5 OR 7)

M.11D

APPENDIX C

TABLE C.5.1-J3.2. J3.2 to Link 11/11B Message Translation Tree (Sheet 5 of 6)

FORWARDING TRANSMIT REQUIREMENTS

1. The FJU shall forward the initial sequence on Link 11B with the M.9A(AC=0)/M.2/M.82/M.11D message sequence at the first transmission opportunity and every opportunity thereafter until the M.9A(AC=0) message is acknowledged.
2. The FJU shall forward the M.2/M.82/M.11D initial sequence once on Link 11.
3. The M.2 message shall be forwarded for each subsequent Link 16 Air Track message received.
4. The M.82 message shall be forwarded at least once every fourth transmission of the M.2 message for real-time air tracks and will be reinitiated when reporting responsibility (R^2) or identity data changes.
5. The M.82 messages shall be forwarded with every M.2 message for nonreal-time air tracks. If both time and velocity are available, an M.2/M.82 message sequence shall be transmitted with the M.82 message reflecting time and a second M.2/M.82 message pair will be transmitted with the M.82 message reflecting velocity. When a NRT track velocity changes from nonzero to zero velocity, the M.2/M.82 must be reported with zero velocity between one and three times in successive transmission opportunities. Thereafter, only the M.2/M.82 for time will be reported.
6. Upon receipt of the J3.2C1 word with nonzero IFF/SIF data, the M.11D message(s) shall be forwarded.
7. If the M.9A(AC=5) is appropriate, it will be forwarded preceding each M.2/M.82 message sequence.

APPENDIX C

TABLE C.5.1-J3.2. J3.2 to Link 11/11B Message Translation Tree (Sheet 6 of 6)

FORWARDING TRANSMIT REQUIREMENTS (Continued)

8. The M.9A(AC=7) message will be forwarded once in each of three successive transmit opportunities.

9. If the M.9A(AC=1, CI=1) is appropriate, it will be forwarded preceding each M.2 or M.2/M.82 message sequence. If the M.9A(AC=1, CI=0) is appropriate, it will be forwarded once prior to the M.2/M.82 message sequence.

DATA RETENTION RULES

The FJU shall retain the latest reported ID, Identity Amplifying Descriptor, Platform, Platform Activity and the status of the Exercise, Identity Difference, Emergency, and Force Tell Indicators for all tracks being forwarded.

TABLE C.5.1-J3.3. J3.3 to Link 11/11B Message Translation Tree (Sheet 1 of 6)

C-131

TEST NODE DIAGRAM		TEST NODE CONDITION	NOTES
		1. SIMULATION INDICATOR = 1. 2. THIS IS THE INITIAL REPORT FROM THIS DATA SOURCE, OR TRACK IS NONREAL-TIME (TQ=0), OR SPECIAL PROCESSING INDICATOR HAS CHANGED, OR FORCE TELL INDICATOR HAS CHANGED, OR EMERGENCY INDICATOR HAS CHANGED. 3. TRACK IS NONREAL-TIME (TQ=0) WITH VELOCITY NOT EQUAL TO ZERO OR VELOCITY HAS CHANGED TO ZERO. 4. ID DIFFERENCE INDICATOR HAS CHANGED FROM 1 TO 0. 5. IDENTITY, IDENTITY AMPLIFYING DESCRIPTOR, PLATFORM, AND/OR PLATFORM ACTIVITY HAS CHANGED. 6. ID DIFFERENCE INDICATOR = 1. 7. NONZERO IFF/SIF IS REPORTED.	1
		REQUIRED ACTION	2 3
A B B B B C C E E F F F F F F F G G G G G H H Y Y Y Y Y Y Y Y Y Y Y Y		A. FWD M.9A(AC=0, SI=1), IF APPROPRIATE. B. FWD M.3/M.83 INITIAL SEQUENCE. C. FWD M.3/M.83 WITH VELOCITY. D. FWD M.3. E. FWD M.9A(AC=1, CI=0). F. FWD M.3/M.83. G. FWD M.11D(TR=0). H. FWD M.9A(AC=1, CI=1). Y. GO TO NEXT NUMERICAL TEST NODE.	

TABLE C.5.1-J3.3. J3.3 to Link 11/11B Message Translation Tree (Sheet 2 of 6)

C-132

TEST NODE DIAGRAM	TEST NODE CONDITION	NOTES
	8. FORCE TELL INDICATOR HAS CHANGED. 9. EMERGENCY INDICATOR HAS CHANGED. 10. EMERGENCY INDICATOR = 1. 11. FORCE TELL INDICATOR = 1.	3
	REQUIRED ACTION	
I I I I I J J J J J K Z Z Z Z Z Z Z Z Z	I. FWD M.9A(AC=5) AND RETAIN ALERT STATUS (ON). J. FWD M.9A(AC=7) AND RETAIN ALERT STATUS (OFF). K. NO CHANGE TO CURRENT ALERT STATUS, CONTINUE M.9A(AC=5) AT NORMAL RATE IF APPROPRIATE. Z. END TRANSLATION.	

APPENDIX C

TABLE C.5.1-J3.3. J3.3 to Link 11/11B Message Translation Tree (Sheet 3 of 6)

NOTES

1. If the Surface (Maritime) Platform or Surface (Maritime) Platform Activity field(s) is received as No Statement and a value other than No Statement is held in the FJU database, the value held in the FJU database shall be forwarded.
2. The M.9A(AC=0, SI=1) message shall precede appropriate messages. (See paragraph C.4.8.6)
3. If both Emergency and Force Tell Indicators have been set to "on," only the Emergency alert is transmitted on Link 11/11B. Transmission of an initial message sequence is not required if the Force Tell Indicator is changed to "on" and the Emergency alert is already being reported.

APPENDIX C

TABLE C.5.1-J3.3. J3.3 to Link 11/11B Message Translation Tree (Sheet 4 of 6)

RELATED MESSAGES

RECEIVED LINK 16
MESSAGE

J3.3

ALL POSSIBLE LINK 11/11B MESSAGES
THAT MAY BE REQUIRED

M.3

M.83

M.9A(AC=0, 1, 5 OR 7)

M.11D

APPENDIX C

TABLE C.5.1-J3.3. J3.3 to Link 11/11B Message Translation Tree (Sheet 5 of 6)

FORWARDING TRANSMIT REQUIREMENTS

1. The FJU shall forward the initial sequence on Link 11B with the M.9A(AC=0)/M.3/M.83/M.11D message sequence at the first transmission opportunity and every opportunity thereafter until the M.9A(AC=0) message is acknowledged.
2. The FJU shall forward the M.3/M.83/M.11D message sequence on Link 11 once when the track is initiated.
3. The M.3 message shall be forwarded for each subsequent Link 16 Surface (Maritime) message received.
4. The M.83 message shall be forwarded every fourth transmission of the M.3 message for real-time Surface (Maritime) tracks and will be reinitiated when reporting responsibility or identity data change.
5. The M.83 messages shall be forwarded with every M.3 message for nonreal-time Surface (Maritime) tracks. If both time and velocity are available, an M.3/M.83 message sequence shall be transmitted with the M.83 message reflecting time and a second M.3/M.83 message pair will be transmitted with the M.83 message reflecting velocity. When a NRT track velocity changes from nonzero to zero velocity, the M.3/M.83 must be reported with zero velocity between one and three times in successive transmission opportunities. Thereafter, only the M.3/M.83 for time will be reported.
6. Upon receipt of the J3.3C1 word with nonzero IFF/SIF data, the M.11D message(s) shall be forwarded.
7. If the M.9A(AC=5) is appropriate, it will be forwarded preceding each M.3/M.83 message sequence.

APPENDIX C

TABLE C.5.1-J3.3. J3.3 to Link 11/11B Message Translation Tree (Sheet 6 of 6)

FORWARDING TRANSMIT REQUIREMENTS (Continued)

8. The M.9A(AC=7) message will be forwarded once in each of three successive transmit opportunities.

9. If the M.9A(AC=1, CI=1) is appropriate, it will be forwarded preceding each M.3 or M.3/M.83 message sequence. If the M.9A(AC=1, CI=0) is appropriate, it will be forwarded once prior to the M.3/M.83 message sequence.

DATA RETENTION RULES

The FJU shall retain the latest reported ID, Identity Amplifying Descriptor, Platform, Platform Activity and the status of the Exercise, Identity Difference, Emergency, and Force Tell Indicators for all tracks being forwarded.

C-137

APPENDIX C

MIL-STD-6016B

C-138

APPENDIX C

APPENDIX C

TABLE C.5.1-J3.4. J3.4 to Link 11/11B Message Translation Tree (Sheet 3 of 6)

NOTES

1. The M.9A(AC=0, SI=1) message shall precede appropriate messages. (See paragraph C.4.8.6)

2. If the Subsurface (Maritime) Platform or Subsurface (Maritime) Platform Activity field(s) is received as No Statement and a value other than No Statement is held in the FJU database, the value held in the FJU database shall be forwarded.

3. If both Emergency and Force Tell Indicators have been set to "on," only the Emergency alert is transmitted on Link 11/11B. Transmission of an initial message sequence is not required if the Force Tell Indicator is changed to "on" and the Emergency alert is already being reported.

APPENDIX C

TABLE C.5.1-J3.4. J3.4 to Link 11/11B Message Translation Tree (Sheet 4 of 6)

RELATED MESSAGES

RECEIVED LINK 16
MESSAGE

J3.4

ALL POSSIBLE LINK 11/11B MESSAGES
THAT MAY BE REQUIRED

M.4A

M.84A

M.4B

M.9A(AC=0, 5 OR 7)

M.11D

APPENDIX C

TABLE C.5.1-J3.4. J3.4 to Link 11/11B Message Translation Tree (Sheet 5 of 6)

FORWARDING TRANSMIT REQUIREMENTS

1. On Link 11 the FJU shall forward the M.4A/M.84A initial sequence and if appropriate, the M.4B, once in each of two successive transmission opportunities. On Link 11B the FJU shall forward the M.9A(AC=0)/M.4A/M.84A initial sequence at the first transmission opportunity and every opportunity thereafter until the M.9A(AC=0) message is acknowledged.
2. The M.4A message, and M.84A message if appropriate, shall be forwarded for each subsequent Link 16 Subsurface (Maritime) Track message received.
3. On Link 11, the M.4B message shall be forwarded with every M.4A or M.4A/M.84A combination, that it amplifies for which a Time (Minutes and Hours) is provided.
4. Upon receipt of the J3.4C1 word with nonzero IFF/SIF data, the M.11D message(s) shall be forwarded.
5. If appropriate, the M.9A(AC=0, SI=1) message shall be forwarded once preceding every transmission of a simulated track on Link 11. If appropriate, the M.9A(AC=0, SI=1) message shall be forwarded at the first transmission opportunity and every transmission opportunity thereafter until the M.9A(AC=0, SI=1) message is acknowledged on Link 11B.
6. The M.9A(AC=5) message, if appropriate, shall be forwarded at the same frequency as, and immediately preceding the M.4A message to which it applies. The M.9A(AC=5) shall be transmitted prior to the M.9A (AC=0) if both are appropriate.
7. The M.9A(AC=7) message shall be forwarded once in each of three successive transmission opportunities.

APPENDIX C

TABLE C.5.1-J3.4. J3.4 to Link 11/11B Message Translation Tree (Sheet 6 of 6)

DATA RETENTION RULES

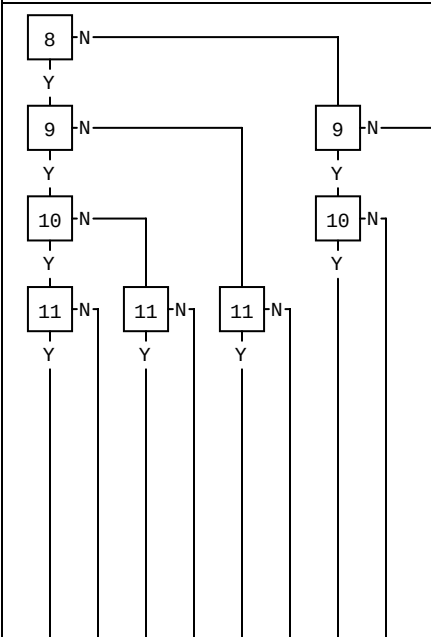
The FJU shall retain the latest reported ID, Platform, Platform Activity, Confidence Level and the status of the Exercise, Emergency, and Force Tell Indicators for all tracks being forwarded.

TABLE C.5.1-J3.5. J3.5 to Link 11/11B Message Translation Tree (Sheet 1 of 6)

C-143

TEST NODE DIAGRAM		TEST NODE CONDITION	NOTES
		1. EXERCISE INDICATOR = 1 OR PERIODIC REPORT INDICATOR = 2. 2. SIMULATION INDICATOR = 1. 3. NONZERO IFF/SIF DATA IS REPORTED. 4. THIS IS INITIAL REPORT FROM DATA SOURCE. 5. SPECIAL PROCESSING INDICATOR HAS CHANGED. 6. HOUR OR MINUTE OTHER THAN NO STATEMENT. 7. ELEVATION, 25 FT OTHER THAN ELEVATION UNKNOWN.	
		REQUIRED ACTION	
A B C C C C D D D E E E F G G G H H H H H H Z		A. DISCARD MESSAGE. B. FWD M.9A(AC=0, SI=1), IF APPROPRIATE. C. FWD M.5 INITIAL SEQUENCE. D. FWD M.5. E. FWD M.85. F. FWD M.11D(TR=0). G. GO TO NEXT NUMERICAL TEST NODE. H. GO TO TEST NODE 8. Z. END TRANSLATION.	1 2

TABLE C.5.1-J3.5. J3.5 to Link 11/11B Message Translation Tree (Sheet 2 of 6)

TEST NODE DIAGRAM										TEST NODE CONDITION	NOTES
										8. FORCE TELL INDICATOR HAS CHANGED.	2 2
										9. EMERGENCY INDICATOR HAS CHANGED.	
										10. EMERGENCY INDICATOR = 1.	
										11. FORCE TELL INDICATOR = 1.	
										REQUIRED ACTION	
C C C C C										C. FWD M.5 INITIAL SEQUENCE.	
I I I I I										I. FWD M.9A(AC=5).	
J J J J J										J. FWD M.9A(AC=7).	
K K K K K K K K										K. RETAIN ALERT STATUS (ON OR OFF) IN FJU DATABASE.	
Z Z Z Z Z Z Z Z Z										Z. END TRANSLATION.	

C-144

APPENDIX C

TABLE C.5.1-J3.5. J3.5 to Link 11/11B Message Translation Tree (Sheet 3 of 6)

NOTES

1. The M.9A(AC=0, SI=1) message shall precede appropriate messages. (See paragraph C.4.8.6)

2. If both Emergency and Force Tell Indicators have been set to "on," only the Emergency alert is transmitted on Link 11/11B. Transmission of an initial message sequence is not required if the Force Tell Indicator is changed to "on" and the Emergency alert is already being reported.

APPENDIX C

TABLE C.5.1-J3.5. J3.5 to Link 11/11B Message Translation Tree (Sheet 4 of 6)

RELATED MESSAGES

RECEIVED LINK 16
MESSAGE

J3.5

ALL POSSIBLE LINK 11/11B MESSAGES
THAT MAY BE REQUIRED

M.5

M.85

M.9A(AC=0, 5 OR 7)

M.11D

APPENDIX C

TABLE C.5.1-J3.5. J3.5 to Link 11/11B Message Translation Tree (Sheet 5 of 6)

FORWARDING TRANSMIT REQUIREMENTS

1. The M.5 initial sequence shall be transmitted by the FJU once in each of two successive transmission opportunities on Link 11. The M.5 initial sequence shall be transmitted by the FJU at the first transmission opportunity and every transmission opportunity thereafter until the M.9A(AC=0) message is acknowledged on Link 11B.
2. Upon receipt of the J3.5 message, one M.5, and M.85 message if appropriate, shall be forwarded once in each of two successive transmit opportunities on Link 11.
3. Upon receipt of the J3.5 message, one M.5, and M.85 message if appropriate, shall be forwarded by the FJU on Link 11B.
4. The M.9A(AC=5) message and an M.85 message shall be forwarded at the same frequency as the M.5 message.
5. When the J3.5 message reports velocity and time and/or altitude, a second M.5 message identical to the first shall be sent, followed by a second M.85 message in which the alternative parameters are included.
6. The M.9A(AC=7) message shall be forwarded once in each of two or three successive transmit opportunities on Link 11 and once in each of three successive transmit opportunities on Link 11B.
7. Upon receipt of the J3.5C1 word with nonzero IFF/SIF data, the M.11D message(s) shall be forwarded.

APPENDIX C

TABLE C.5.1-J3.5. J3.5 to Link 11/11B Message Translation Tree (Sheet 6 of 6)

DATA RETENTION RULES

The FJU shall retain the status of the Exercise, Emergency, and Force Tell Indicators for all tracks being forwarded.

C-149

MIL-STD-6016B
APPENDIX C

APPENDIX C

TABLE C.5.1-J3.6. J3.6 to Link 11/11B Message Translation Tree (Sheet 2 of 4)

NOTES

1. The M.9A(AC=0, SI=1) message shall precede the appropriate messages on both Link 11 and Link 11B. (See paragraph C.4.8.6)
2. The proper M.2/M.82 Air Surveillance sequence (ID AMP = Missile) on Link 11, preceded by an M.9A(AC=0, SPI=0 or 1) for Link 11B, may be forwarded to both Link 11 and Link 11B for initial sequences and changes to SPI.

APPENDIX C

TABLE C.5.1-J3.6. J3.6 to Link 11/11B Message Translation Tree (Sheet 3 of 4)

RELATED MESSAGES

RECEIVED LINK 16
MESSAGE

J3.6

ALL POSSIBLE LINK 11/11B MESSAGES
THAT MAY BE REQUIRED

M.2/M.82

M.9A(AC=0, 1, 5 OR 7)

APPENDIX C

TABLE C.5.1-J3.6. J3.6 to Link 11/11B Message Translation Tree (Sheet 4 of 4)

FORWARDING TRANSMIT REQUIREMENTS

1. The FJU may forward the initial M.2/M.82 Air Surveillance sequence (ID AMP = Missile) on Link 11, preceded by an M.9A(AC=0) for Link 11B.
2. The FJU may forward each subsequent Link 16 Space Track message received in the proper M.2/M.82 Air Surveillance sequence (ID AMP = Missile) to both Link 11 and Link 11B.
3. If the M.9A(AC=1, CI=1) and/or M.9A(AC=5) is appropriate, it/they will be forwarded preceding each M.2/M.82 (ID AMP = Missile) on Link 11 and Link 11B.
4. The M.9A(AC=7) message will be forwarded once in each of three successive transmit opportunities.

DATA RETENTION RULES

The FJU shall retain the latest reported ID, Identity Amplifying Descriptor, Platform, Platform Activity and the status of the Exercise Indicator for all tracks being forwarded.

TABLE C.5.1-J3.7. J3.7 to Link 11/11B Message Translation Tree (Sheet 1 of 6)

C-153

TEST NODE DIAGRAM		TEST NODE CONDITION	NOTES
<pre>graph TD 1[1] -- Y --> 2[2] 1 -- N --> 4[4] 2 -- Y --> 3[3] 2 -- N --> 1 3 -- Y --> 4 3 -- N --> 1 4 -- Y --> 5[5] 4 -- N --> 1 5 -- Y --> 6[6] 5 -- N --> 1 6 -- Y --> 7[7] 6 -- N --> 1 7 -- Y --> 8[8] 7 -- N --> 1 8 -- Y --> 9[9] 8 -- N --> 1 9 -- Y --> 10[10] 9 -- N --> 1 10 -- Y --> 9 10 -- N --> 1 9 -- Y --> 8 9 -- N --> 1 8 -- Y --> 7 8 -- N --> 1 7 -- Y --> 6 7 -- N --> 1 6 -- Y --> 5 6 -- N --> 1 5 -- Y --> 4 5 -- N --> 1 4 -- Y --> 3 4 -- N --> 1 3 -- Y --> 2 3 -- N --> 1 2 -- Y --> 1 2 -- N --> 1</pre>		1. FIX OR BEARING DESCRIPTOR (FIX BRG) = 6. 2. FIX BRG = 4. 3. TN, ORIGIN = NO STATEMENT. 4. FIX BRG = 1. 5. AREA MAJOR AXIS, AREA MINOR AXIS, OR SQUARE/CIRCLE SWITCH = NO STATEMENT OR UNDEFINED. 6. COURSE OR SPEED = NO STATEMENT. 7. FIX BRG = 5. 8. FREQUENCY DATA ARE INCLUDED. 9. EMITTER NUMBER INDICATOR = 1. 10. FIX BRG = 0.	
		REQUIRED ACTION	
A A B A A		A. DISCARD MESSAGE. B. FWD M.6A. C. FWD M.9F(AC=0)/M.89F(AC=0). D. FWD M.9F(AC=0)/M.89F(AC=0)/M.9F(AC=1). E. FWD M.6B/M.86B (EV SW=0). F. FWD M.6B/M.86B (EV SW=1). G. GO TO TEST NODE 11. Z. END TRANSLATION.	1 2 2 2 2 2
Z Z G Z G G E E E F E G G Z			

TABLE C.5.1-J3.7. J3.7 to Link 11/11B Message Translation Tree (Sheet 2 of 6)

TEST NODE DIAGRAM	TEST NODE CONDITION	NOTES
	11. SIMULATION INDICATOR = 1. 12. THIS IS THE INITIAL REPORT FROM THIS DATA SOURCE, SPECIAL PROCESSING INDICATOR HAS CHANGED OR RESPONSE INDICATOR = 1. 13. EMERGENCY INDICATOR = 1. 14. EMERGENCY INDICATOR HAS CHANGED. 15. FORCE TELL INDICATOR = 1. 16. FORCE TELL INDICATOR HAS CHANGED.	3 4 4 4 4
	REQUIRED ACTION	5
H I J K N Z	H. FWD M.9A(AC=0, SI=1), IF APPROPRIATE. I. FWD INITIAL SEQUENCE. J. FWD M.9A(AC=5). K. RETAIN ALERT STATUS IN FJU DATABASE. L. FWD M.9A(AC=7). N. GO TO NEXT NUMERICAL TEST NODE. Z. END TRANSLATION.	

C-154

APPENDIX C

TABLE C.5.1-J3.7. J3.7 to Link 11/11B Message Translation Tree (Sheet 3 of 6)

NOTES

1. If both the Frequency, 1 value in the J3.7C4 and the Elevation Angle value in the J3.7C1 are not No Statement, then consecutive M.6A messages need to be forwarded with Switch = 0 and Switch = 1, respectively.
2. Link 11/11B Transmit Rules only require that M.6A, M.6B/M.86B, and M.9F/M.89F messages be transmitted when data change, whereas Link 16 Transmit Rules require that J3.7 messages be transmitted periodically every 48 seconds and when data change. However, these messages shall be forwarded upon receipt of each J3.7 message, regardless of whether data have changed. This is an exception to the general forwarding rule in paragraph C.4.3.
3. There is no difference between forwarding an initial sequence and subsequent transmissions on Link 11. On Link 11B, the initial sequence is preceded by an M.9A(AC=0), which is repeated at each transmit opportunity until it is acknowledged. After the M.9A(AC=0) is acknowledged, Link 11 and 11B message sequences are the same. The M.9A(AC=0) is given only once in a sequence for an initial sequence, e.g., M.9A(AC=0)/M.6B/M.86B(EV SW=0)/M.6B/M.86B(EV SW=1).
4. If both the Emergency and Force Tell Indicators have been set to "on," only the Emergency alert will be transmitted on Link 11 and Link 11B. Transmission of an initial message sequence is not required if the Force Tell Indicator is changed to "on" and the Emergency alert is already being reported. If this is an initial report with Emergency and Force Tell Indicator = 0, this does not constitute a change and the M.9A(AC=7) is not sent.
5. The M.9A(AC=0, SI=1) message shall precede appropriate messages. (See paragraph C.4.8.6)

APPENDIX C

TABLE C.5.1-J3.7. J3.7 to Link 11/11B Message Translation Tree (Sheet 4 of 6)

RELATED MESSAGES

RECEIVED LINK 16
MESSAGE

J3.7

ALL POSSIBLE LINK 11/11B MESSAGES
THAT MAY BE REQUIRED

M.6A
M.6B
M.86B
M.9A(AC=0, 5 OR 7)
M.9F(0)
M.89F(0)
M.9F(1)

APPENDIX C

TABLE C.5.1-J3.7. J3.7 to Link 11/11B Message Translation Tree (Sheet 5 of 6)

FORWARDING TRANSMIT REQUIREMENTS

1. The FJU shall transmit the M.6A or M.6B/M.86B initial sequence on Link 11B, immediately preceded by a M.9A(AC=0) message at the first transmission opportunity and every opportunity thereafter until the M.9A(AC=0) message is acknowledged.
2. The M.6A or the M.6B/M.86B shall be transmitted once in each of two consecutive transmission opportunities on Link 11 and once on Link 11B, except as required by rule 1 above.
3. The FJU shall transmit the M.9F(AC=0)/M.89F(AC=0) or M.9F(AC=0)/M.89F(AC=0)/M.9F(AC=1) initial sequence on Link 11B immediately preceded by an M.9A(AC=0) message at the first transmission opportunity and every transmission opportunity thereafter until the M.9A(AC=0) is acknowledged.
4. The M.9F(AC=0)/M.89F(AC=0) and M.9F(AC=0)/M.89F(AC=0)/M.9F(AC=1) shall be transmitted once in each of two consecutive transmission opportunities, except as required by rule 3 above.
5. If the M.9A(AC=5) is appropriate, it shall be transmitted at the same frequency and immediately preceding the M.6A, M.6B, or M.9F message sequence to which it applies. The M.9A(AC=5) shall be transmitted prior to the M.9A(AC=0), if both are appropriate.
6. The M.9A(AC=7) shall be transmitted once in each of three consecutive transmission opportunities.

APPENDIX C

TABLE C.5.1-J3.7. J3.7 to Link 11/11B Message Translation Tree (Sheet 6 of 6)

DATA RETENTION RULES

The FJU shall retain the latest reported status of the Emergency and Force Tell Indicators for all J3.7 TNs being forwarded.

TABLE C.5.1-J5.4. J5.4 to Link 11 Message Translation Tree (Sheet 1 of 5)

TEST NODE DIAGRAM	TEST NODE CONDITION	NOTES
<pre>graph TD 1[1] -- N --> 2[2] 1 -- Y --> 3a[3] 2 -- Y --> 3b[3] 2 -- N --> 3c[3] 3a -- Y --> 3d[3] 3a -- N --> 3e[3] 3b -- Y --> 3f[3] 3b -- N --> 3g[3] 3c -- Y --> 3h[3] 3c -- N --> 3i[3]</pre>	1. THIS IS INITIAL REPORT FROM THE DATA SOURCE. 2. SPECIAL PROCESSING INDICATOR HAS CHANGED. 3. MINUTE OR HOUR OTHER THAN NO STATEMENT.	1
	REQUIRED ACTION	
B A B A C E E E E D E	A. FWD M.4D/M.84D INITIAL SEQUENCE. B. FWD M.4D/M.84D/M.4B INITIAL SEQUENCE. C. FWD M.4D/M.84D SEQUENCE. D. FWD M.4D/M.84D/M.4B SEQUENCE. E. GO TO TEST NODE 4.	

C-160

APPENDIX C

APPENDIX C

TABLE C.5.1-J5.4. J5.4 to Link 11 Message Translation Tree (Sheet 3 of 5)

NOTES

1. The J5.4 message is not forwarded on to Link 11B.
2. If both Emergency and Force Tell Indicators have been set to "on," only the Emergency alert is transmitted on Link 11. Transmission of an initial message sequence is not required if the Force Tell Indicator is changed to "on" and the Emergency alert is already being reported.

APPENDIX C

TABLE C.5.1-J5.4. J5.4 to Link 11 Message Translation Tree (Sheet 4 of 5)

RELATED MESSAGES

RECEIVED LINK 16
MESSAGE

J5.4

ALL POSSIBLE LINK 11 MESSAGES
THAT MAY BE REQUIRED

M.4B

M.4D

M.84D

M.9A(AC=0, 5 OR 7)

APPENDIX C

TABLE C.5.1-J5.4. J5.4 to Link 11 Message Translation Tree (Sheet 5 of 5)

FORWARDING TRANSMIT REQUIREMENTS

1. The FJU shall forward the M.4D/M.84D initial message sequence and if appropriate, the M.4B, on Link 11 once in each of two successive transmission opportunities.
2. The M.4D/M.84D message sequence, and M.4B message if appropriate, shall be forwarded for each subsequent J5.4 message received.
3. If appropriate, the M.9A(AC=0, SI=1) message shall be forwarded once preceding every transmission of a simulated track on Link 11.
4. The M.9A(AC=5) message, if appropriate, shall be forwarded at the same frequency as, and immediately preceding the M.4D message to which it applies. The M.9A(AC=5) shall be transmitted prior to the M.9A(AC=0) if both are appropriate.
5. The M.9A(AC=7) message shall be forwarded once in each of three successive transmission opportunities.

DATA RETENTION RULES

The FJU shall retain the latest reported status of the Emergency and Force Tell Indicators for all J5.4 TNs being forwarded.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.1-J6.0. J6.0 to Link 11/11B Message Translation Tree (Sheet 1 of 3)

TEST NODE DIAGRAM		TEST NODE CONDITION	NOTES
The diagram shows a square box containing the number '1'. To the right of the box is a horizontal line ending in an 'N'. Below the box is a vertical line ending in a 'Y'.		1. ENVIRONMENT/CATEGORY = 1.	
		REQUIRED ACTION	
A Z B Z		A. DISCARD MESSAGE. B. FWD M.11M/M.811M MESSAGE SEQUENCE. Z. END TRANSLATION.	

APPENDIX C

TABLE C.5.1-J6.0. J6.0 to Link 11/11B Message Translation Tree (Sheet 2 of 3)

RELATED MESSAGES

RECEIVED LINK 16
MESSAGE

J6.0

ALL POSSIBLE LINK 11/11B MESSAGES
THAT MAY BE REQUIRED

M.11M

M.811M

APPENDIX C

TABLE C.5.1-J6.0. J6.0 to Link 11/11B Message Translation Tree (Sheet 3 of 3)

FORWARDING TRANSMIT REQUIREMENTS

1. Three M.11M/M.811M message sequences shall be forwarded for each J6.0 message unless Activity Amplification Index values 1 through 10 are reported.
2. When the J6.0 message reports Activity Amplification Index values 1 through 10, the M.11M/M.811M message sequence shall be forwarded three times, except that a change in the Activity Amplification Index shall interrupt the redundant transmission of the message containing the previous Activity Amplification Index. The redundant J6.0 messages shall be discarded.

DATA RETENTION RULES

There are no Data Retention Rules associated with this message translation.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.1-J7.0. J7.0 to Link 11/11B Message Translation Tree (Sheet 1 of 4)

TEST NODE DIAGRAM		TEST NODE CONDITION	NOTES
<pre> graph TD 1[1] -- Y --> 2[2] 1 -- N --> 5[5] 2 -- Y --> 3[3] 2 -- N --> 5 3 -- Y --> 4[4] 3 -- N --> 5 4 -- Y --> 5 5 -- Y --> 6[6] 5 -- N --> 7[7] 6 -- Y --> 7 6 -- N --> 9[9] 7 -- Y --> 8[8] 7 -- N --> 9 8 -- Y --> 9 9 -- Y --> 10[10] 9 -- N --> 10 10 -- Y --> 10 10 -- N --> 10 </pre>		1. ACTION, TRACK MANAGEMENT = 5, 6, OR 7. 2. ACTION, TRACK MANAGEMENT = 0. 3. IS TN, REFERENCE AN ACTIVE UNIT. 4. IS TN, SOURCE THE CURRENT R2 FOR THE TN, REFERENCE. 5. ACTION, TRACK MANAGEMENT = 1. 6. ACTION, TRACK MANAGEMENT = 2. 7. ENVIRONMENT/CATEGORY = 2 OR 3. 8. CONTROLLING UNIT INDICATOR = 1. 9. ACTION, TRACK MANAGEMENT = 3. 10. ALERT STATUS CHANGE = 1.	1 1 3 2
		REQUIRED ACTION	
A B B A A A B C B D E F G F H I J K L Z Z Z Z Z Z Z Z Z Z Z Z Z		A. DISCARD MESSAGE. B. FWD M.9A(AC=4). C. DECLARE UNIT INACTIVE IN FJU DATABASE. D. FWD M.9A(AC=1). E. FWD M.9A(AC=2). F. FWD M.9A(AC=5). G. SET EMERGENCY INDICATOR IN DATABASE. H. FWD M.9A(AC=7). I. CLEAR EMERGENCY INDICATOR IN DATABASE. J. SET FORCE TELL INDICATOR IN DATABASE. K. CLEAR FORCE TELL INDICATOR IN DATABASE. L. FWD M.9A(AC=6). Z. END TRANSLATION.	

C-169

APPENDIX C

MIL-STD-6016B

APPENDIX C

TABLE C.5.1-J7.0. J7.0 to Link 11/11B Message Translation Tree (Sheet 2 of 4)

NOTES

1. If the FJU holds local data for the track, the FJU shall assume R^2 for the track rather than forwarding a Drop Track message. If the reference track is a C^2 IU being forwarded on Link 11B, link protocol demands that a Drop Track message be sent to signify inactive status of an interface unit. The latter is true even in those cases where the FJU assumes R^2 for the C^2 IU.
2. Environment/Category of 2 (Air) or 3 (Surface) are the only legal values on Link 11/11B for Information Difference or Change Data Order messages.
3. If the FJU is retaining ID data received in a previous M.9A(AC=1, CI=0) or J7.0 (ACT = 1) message for the same TN, disregard this message.

APPENDIX C

TABLE C.5.1-J7.0. J7.0 to Link 11/11B Message Translation Tree (Sheet 3 of 4)

RELATED MESSAGES

RECEIVED LINK 16
MESSAGE

J7.0

ALL POSSIBLE LINK 11/11B MESSAGES
THAT MAY BE REQUIRED

M.9A(AC=1, 2 OR 4-7)

APPENDIX C

TABLE C.5.1-J7.0. J7.0 to Link 11/11B Message Translation Tree (Sheet 4 of 4)

FORWARDING TRANSMIT REQUIREMENTS

1. A single M.9A(AC=1, 2, or 6) message shall be forwarded for each J7.0 (ACT = 1 or 2) message received.
2. Upon receipt of the J7.0 (ACT = 3 or 4), the M.9A(AC=5 or 7) shall be transmitted in three consecutive transmit opportunities.
3. The M.9A(AC=4) message is transmitted in two consecutive transmit opportunities after receipt of a J7.0 (ACT = 0) message. If the track becomes active, including an R² shift, prior to either of the M.9A(AC=4) messages being transmitted, the M.9A(AC=4) message(s) that would have followed will not be transmitted.

DATA RETENTION RULES

The FJU shall retain ID data received in a J7.0 (ACT = 1) message until the conflict has been resolved by the R² unit or an R² shift occurs.

TABLE C.5.1-J7.1. J7.1 to Link 11/11B Message Translation Tree (Sheet 1 of 4)

TEST NODE DIAGRAM	TEST NODE CONDITION	NOTES
<pre>graph TD 1[1] -- Y --> 4[4] 1 -- N --> 2[2] 2 -- Y --> 4 2 -- N --> 3[3] 3 -- Y --> 4 3 -- N --> 6[6] 4 -- Y --> 5[5] 4 -- N --> 6 5 -- Y --> 6 5 -- N --> 7[7] 6 -- Y --> 7 6 -- N --> 7 7 -- Y --> 7 7 -- N --> 7</pre>	1. ACTION, DATA UPDATE REQUEST = 2-7. 2. TN, ADDRESSEE = 177 (OCTAL) OR FJU ADDRESS. 3. TN, ADDRESSEE = LINK 11/11B UNIT BEING FORWARDED. 4. ACTION, DATA UPDATE REQUEST = 0. 5. TN, REFERENCE = ADDRESS OF ACTIVE LINK 11/11B UNIT BEING FORWARDED. 6. DATA REQUEST INDICATOR(S) OTHER THAN WEATHER OR FILTER ARE SET TO 1. 7. TN, REFERENCE = 0.	1 2
	REQUIRED ACTION	
A B B B A C D E Z Z Z Z Z Z Z	A. DISCARD MESSAGE. B. RESPOND WITH APPROPRIATE LOCAL DATA ON LINK 16. C. RESPOND WITH J2.0 FOR EACH ACTIVE LINK 11/11B UNIT. D. RESPOND WITH J2.0 FOR SPECIFIED UNIT. E. FWD M.9A(AC=3) TO ADDRESSEE. Z. END TRANSLATION.	

APPENDIX C

TABLE C.5.1-J7.1. J7.1 to Link 11/11B Message Translation Tree (Sheet 2 of 4)

NOTES

1. Check each addressee of the J7.1 message to determine if forwarding is required and if multiple forwarding is required for the one J7.1 message.
2. The discrete data request indicators cannot be forwarded. All data received in response to a Data Update Request message shall be passed by the FJU without regard to the original data request indicator settings. Further, the FJU shall not set the Response Indicator in the J3.0, J3.5, or J6.0 messages being forwarded even though these messages may be in response to a Data Update message.

APPENDIX C

TABLE C.5.1-J7.1. J7.1 to Link 11/11B Message Translation Tree (Sheet 3 of 4)

RELATED MESSAGES

RECEIVED LINK 16
MESSAGE

J7.1

ALL POSSIBLE LINK 11/11B MESSAGES
THAT MAY BE REQUIRED

M.9A(AC=3)

APPENDIX C

TABLE C.5.1-J7.1. J7.1 to Link 11/11B Message Translation Tree (Sheet 4 of 4)


FORWARDING TRANSMIT REQUIREMENTS

1. A single M9.A(AC=3) message shall be transmitted on the appropriate link(s) to each active addressee for every J7.1 message received.
2. The FJU shall respond, when appropriate, to a Data Update Request with J2.0 messages for active units that are being forwarded.

DATA RETENTION RULES

There are no Data Retention Rules associated with this message translation.

TABLE C.5.1-J7.2. J7.2 to Link 11/11B Message Translation Tree (Sheet 1 of 3)

TEST NODE DIAGRAM		TEST NODE CONDITION	NOTES
		1. TRACK NUMBER, RETAINED OR TRACK NUMBER, DROPPED = 00000, 00077, 00176, 00177, OR 07777 (OCTAL).	
		REQUIRED ACTION	
A Z B Z		A. DISCARD MESSAGE. B. FWD M.9B(AC=7). Z. END TRANSLATION.	

APPENDIX C

TABLE C.5.1-J7.2. J7.2 to Link 11/11B Message Translation Tree (Sheet 2 of 3)

RELATED MESSAGES

RECEIVED LINK 16
MESSAGE

J7.2

ALL POSSIBLE LINK 11/11B MESSAGES
THAT MAY BE REQUIRED

M.9B(AC=7)

APPENDIX C

TABLE C.5.1-J7.2. J7.2 to Link 11/11B Message Translation Tree (Sheet 3 of 3)

FORWARDING TRANSMIT REQUIREMENTS

Upon receipt of the J7.2 the M.9B (AC=7) shall be transmitted in two consecutive transmit opportunities. If a second identical J7.2 message is received within 1(0.5-2,0.25) seconds it shall be ignored and shall not interrupt the transmission cycle.

DATA RETENTION RULES


There are no data retention rules associated with this message translation.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.1-J7.3. J7.3 to Link 11/11B Message Translation Tree (Sheet 1 of 4)

TEST NODE DIAGRAM		TEST NODE CONDITION	NOTES
		1. TN, ADDRESSEE = 177 (OCTAL) OR ACTION, POINTER = 5-7. 2. TN ADDRESSEE(S) IS AN ACTIVE LINK 11/11B UNIT FOR WHOM DATA ARE BEING FORWARDED BY THIS FJU.	1
		REQUIRED ACTION	
A A B Z Z Z		A. DISCARD MESSAGE. B. FWD M.9C TO ADDRESSEE. Z. END TRANSLATION.	

APPENDIX C

TABLE C.5.1-J7.3. J7.3 to Link 11/11B Message Translation Tree (Sheet 2 of 4)

NOTES

1. Check each addressee of the J7.3 message to determine if forwarding is required and if multiple forwarding is required for the one J7.3 message.

APPENDIX C

TABLE C.5.1-J7.3. J7.3 to Link 11/11B Message Translation Tree (Sheet 3 of 4)

RELATED MESSAGES

RECEIVED LINK 16
MESSAGE

J7.3

ALL POSSIBLE LINK 11/11B MESSAGES
THAT MAY BE REQUIRED

M.9C

APPENDIX C

TABLE C.5.1-J7.3. J7.3 to Link 11/11B Message Translation Tree (Sheet 4 of 4)

FORWARDING TRANSMIT REQUIREMENTS

A single M.9C message shall be transmitted to each active addressee for every J7.3 message received.

DATA RETENTION RULES

There are no Data Retention Rules associated with this message translation.

TABLE C.5.1-J7.4. J7.4 to Link 11/11B Message Translation Tree (Sheet 1 of 3)

TEST NODE DIAGRAM		TEST NODE CONDITION	NOTES
<pre>graph TD 1[1] -- N --> 2[2] 1 -- Y --> 3[3] 2 -- Y --> 3 2 -- N --> 4[4] 3 -- Y --> 4 3 -- N --> 5[5] 4 -- Y --> 5 5 --> RA[REQUIRED ACTION]</pre>		1. NATO LINK 1 TN APPLICABILITY = 0. 2. TN, REFERENCE LESS THAN 07777 (OCTAL), OR AN ASSOCIATION IS HELD BETWEEN TN, REFERENCE AND LINK 11/11B TN. 3. TN, REPORT/REQUEST = 0. 4. FJU HOLDS NATO LINK 1 TN FOR TN, REFERENCE IN ITS DATABASE.	
		REQUIRED ACTION	
A B Z Z Z Z Z		A. DO NOT FORWARD MESSAGE. B. FWD M.9E(AC=3, SW=0). C. FWD M.9E(AC=5, SW=0). Z. END TRANSLATION.	

C-185

APPENDIX C

TABLE C.5.1-J7.4. J7.4 to Link 11/11B Message Translation Tree (Sheet 2 of 3)

RELATED MESSAGES

RECEIVED LINK 16
MESSAGE

J7.4

ALL POSSIBLE LINK 11/11B MESSAGES
THAT MAY BE REQUIRED

M.9E(AC=3 OR 5)

APPENDIX C

TABLE C.5.1-J7.4. J7.4 to Link 11/11B Message Translation Tree (Sheet 3 of 3)

FORWARDING TRANSMIT REQUIREMENTS

1. The M.9E message shall be forwarded one time for each translation of the received J7.4 message as indicated in the translation tree.
2. Only NATO Link 1 Track Number Reports/Requests are forwarded to/from Link 16 and Link 11/11B. Reports/Requests for TNs other than NATO Link 1 are handled by the FJU as a normal link participant, following the rules and protocols of the individual link, but are not forwarded.

DATA RETENTION RULES

There are no Data Retention Rules associated with this message translation.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.1-J7.5. J7.5 to Link 11/11B Message Translation Tree (Sheet 1 of 4)

C-189

TEST NODE DIAGRAM	TEST NODE CONDITION	NOTES
<pre>graph TD 1[1] -- Y --> A 1 -- N --> 2[2] 2 -- Y --> B 2 -- N --> 3[3] 3 -- Y --> C 3 -- N --> 4[4] 4 -- Y --> D 4 -- N --> 5[5] 5 -- Y --> E 5 -- N --> Z</pre>	1. ACTION, IFF/SIF MANAGEMENT = 4-7. 2. ACTION, IFF/SIF MANAGEMENT = 0. 3. ACTION, IFF/SIF MANAGEMENT = 1. 4. ACTION, IFF/SIF MANAGEMENT = 2. 5. NONZERO SPECIAL CODE II DATA IS REPORTED.	1
A B C D E Z Z Z Z Z Z	REQUIRED ACTION A. DISCARD MESSAGE. B. FWD M.9A(AC=9, ISAC=0). C. FWD M.9A(AC=9, ISAC=1, MI NOT EQUAL TO 7). D. FWD M.9A(AC=9, ISAC=1, MI=7). E. FWD M.11D(TR=1). Z. END TRANSLATION.	

APPENDIX C

TABLE C.5.1-J7.5. J7.5 to Link 11/11B Message Translation Tree (Sheet 2 of 4)

NOTES

1. The FJU shall modify IFF/SIF information in its database as appropriate to the J7.5 (ACT = 0) IFF/SIF Clear message received from any source. The IFF/SIF information subsequently forwarded shall reflect this change until modified by the R² unit.

APPENDIX C

TABLE C.5.1-J7.5. J7.5 to Link 11/11B Message Translation Tree (Sheet 3 of 4)

RELATED MESSAGES

RECEIVED LINK 16
MESSAGE

J7.5

ALL POSSIBLE LINK 11/11B MESSAGES
THAT MAY BE REQUIRED

M.9A(AC=9)
M.11D

APPENDIX C

TABLE C.5.1-J7.5. J7.5 to Link 11/11B Message Translation Tree (Sheet 4 of 4)


FORWARDING TRANSMIT REQUIREMENTS

1. A single M.9A(AC=9) message is required for each applicable mode reported in the J7.5 (ACT = 0 or 1) message, unless the J7.5 (ACT = 0) message clears Modes I, II, and III. In that case, a single M.9A(AC=9) message shall be forwarded.
2. An M.9A(AC=9) message clearing IFF/SIF data shall be transmitted once in each of the next three transmit opportunities. In all other cases, the M.9A(AC=9) message shall be transmitted once.
3. Three M.11D(TR=1) messages shall be transmitted for each J7.5 (ACT = 3) message received with Special Code II data not equal to zero.

DATA RETENTION RULES

There are no Data Retention Rules associated with this message translation.

TABLE C.5.1-J7.7. J7.7 to Link 11/11B Message Translation Tree (Sheet 1 of 3)

TEST NODE DIAGRAM			TEST NODE CONDITION	NOTES
 <pre>graph TD N1[1] -- Y --> L1[] N1 -- N --> N2[2] N2 -- Y --> L2[] N2 -- N --> L2 L1 --> L3[] L2 --> L3 L3 --> L4[]</pre>			1. ACTION, ASSOCIATION = 2-7. 2. ACTION, ASSOCIATION = 1.	
			REQUIRED ACTION	
A	B	C	A. DISCARD MESSAGE. B. CLEAR ASSOCIATION IN DATABASE. C. FWD M.9B. Z. END TRANSLATION.	
Z	Z	Z		

APPENDIX C

TABLE C.5.1-J7.7. J7.7 to Link 11/11B Message Translation Tree (Sheet 2 of 3)

RELATED MESSAGES

RECEIVED LINK 16
MESSAGE

J7.7

ALL POSSIBLE LINK 11/11B MESSAGES
THAT MAY BE REQUIRED

M.9B(AC = 6 or 15)

APPENDIX C

TABLE C.5.1-J7.7. J7.7 to Link 11/11B Message Translation Tree (Sheet 3 of 3)

FORWARDING TRANSMIT REQUIREMENTS

A single M.9B message shall be forwarded for a J7.7 (ACT = 0) message. The M.9B messages shall be forwarded in three consecutive transmission opportunities for a J7.7 (ACT = 1) message.

DATA RETENTION RULES

There are no Data Retention Rules associated with this message translation.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.1-J9.0. J9.0 to Link 11/11B Message Translation Tree (Sheet 1 of 5)

TEST NODE DIAGRAM		TEST NODE CONDITION	NOTES
<pre> graph TD 1[1] -- Y --> 9a[9] 1 -- N --> 2[2] 2 -- Y --> 3[3] 2 -- N --> 9b[9] 3 -- Y --> 4[4] 3 -- N --> 9c[9] 4 -- Y --> 5[5] 4 -- N --> 9d[9] 5 -- Y --> 6a[6] 5 -- N --> 9e[9] 6a -- Y --> 6b[6] 6a -- N --> 9f[9] 6b -- Y --> 8a[8] 6b -- N --> 9g[9] 8a -- Y --> 9h[9] 8a -- N --> 10a[10] 10a -- Y --> 11[11] 11 -- Y --> 9i[9] 11 -- N --> 9j[9] 7 -- Y --> 9k[9] 7 -- N --> 9l[9] 9a --> A1[A] 9b --> B1[B] 9c --> C1[C] 9d --> D1[D] 9e --> E1[E] 9f --> F1[F] 9g --> G1[G] 9h --> H1[H] 9i --> I1[I] 9j --> J1[J] 9k --> K1[K] 9l --> L1[L] 9m --> M1[M] 9n --> N1[N] 9o --> O1[O] 9p --> P1[P] 9q --> Q1[Q] 9r --> R1[R] 9s --> S1[S] 9t --> T1[T] 9u --> U1[U] 9v --> V1[V] 9w --> W1[W] 9x --> X1[X] 9y --> Y1[Y] 9z --> Z1[Z] 10a --> A2[A] 10b --> B2[B] 10c --> C2[C] 10d --> D2[D] 10e --> E2[E] 10f --> F2[F] 10g --> G2[G] 10h --> H2[H] 10i --> I2[I] 10j --> J2[J] 10k --> K2[K] 10l --> L2[L] 10m --> M2[M] 10n --> N2[N] 10o --> O2[O] 10p --> P2[P] 10q --> Q2[Q] 10r --> R2[R] 10s --> S2[S] 10t --> T2[T] 10u --> U2[U] 10v --> V2[V] 10w --> W2[W] 10x --> X2[X] 10y --> Y2[Y] 10z --> Z2[Z] 11 --> A3[A] 11 --> B3[B] 11 --> C3[C] 11 --> D3[D] 11 --> E3[E] 11 --> F3[F] 11 --> G3[G] 11 --> H3[H] 11 --> I3[I] 11 --> J3[J] 11 --> K3[K] 11 --> L3[L] 11 --> M3[M] 11 --> N3[N] 11 --> O3[O] 11 --> P3[P] 11 --> Q3[Q] 11 --> R3[R] 11 --> S3[S] 11 --> T3[T] 11 --> U3[U] 11 --> V3[V] 11 --> W3[W] 11 --> X3[X] 11 --> Y3[Y] 11 --> Z3[Z] </pre>		1. ADDRESSEE IS A LINK 11B UNIT AND COMMAND = 14-22 OR 27. 2. ADDRESSEE IS A UNIT TO WHOM DATA ARE BEING FORWARDED; COMMAND = 0-9, OR 14-25; AND R/C=0-4, 6-7, OR 15-16. 3. EXERCISE INDICATOR = 1. 4. COMMAND = 9, 24 OR 25. 5. COMMAND = 20-22. 6. ADDRESSEE ACTIVE. 7. COMMAND = 0-8 OR 23. 8. R/C = 3, 4, 6, 7, 15, OR 16. 9. R/C = 0. 10. R/C = 2. 11. R/C = 23-30.	1
		REQUIRED ACTION	2
A. DISCARD MESSAGE. B. DO NOT FORWARD MESSAGE. C. SET INDICATOR TO TRANSMIT J9.0 CANTPRO. D. FWD M.10A. E. FWD M.15. F. GO TO TEST NODE 12. G. GO TO TEST NODE 13. Z. END TRANSLATION.			

C-197

 MIL-STD-6016B
 APPENDIX C

TABLE C.5.1-J9.0. J9.0 to Link 11/11B Message Translation Tree (Sheet 2 of 5)

C-198

TEST NODE DIAGRAM		TEST NODE CONDITION	NOTES
<pre>graph TD 12[12] -- Y --> 13[13] 12 -- N --> 14[14] 13 -- Y --> 14 13 -- N --> 15[15] 14 -- Y --> 15 14 -- N --> 16[16] 15 -- Y --> 16 15 -- N --> 17[17] 16 -- Y --> 17 16 -- N --> 18[18] 17 -- Y --> 18 17 -- N --> 19[19] 18 -- Y --> 19 18 -- N --> 20[20] 19 -- Y --> 20 19 -- N --> 20 20 -- Y --> 20 20 -- N --> 20</pre>		12. VOICE CALL SIGN IS OTHER THAN ALL BLANKS OR VOICE FREQ/CHANNEL IS VALUE 1-7,000. 13. COMMAND = 0-8 OR 23. 14. COMMAND = 14 OR 15. 15. COMMAND = 16 OR 17. 16. COMMAND = 18 OR 19. 17. COMMAND MISSION IS OTHER THAN NO STATEMENT. 18. DUTY ASSIGNMENT IS OTHER THAN NO STATEMENT. 19. COMMAND = 27 WITH TN, FRIENDLY WEAPON = 0 AND IMPACT TIME (HOUR AND MINUTE) OF NS OR EQUAL TO SYSTEM ACTUAL TIME PLUS 1-60 MINUTES. 20. R/C = 0.	
		REQUIRED ACTION	
A B C D E H I Z		A. DISCARD MESSAGE. B. DO NOT FORWARD MESSAGE. C. SET INDICATOR TO TRANSMIT J9.0 CANTPRO. D. FWD M.10A. E. FWD M.15. H. FWD M.15 ON LINK 11 ONLY. I. FWD M.9E. Z. END TRANSLATION.	

APPENDIX C

TABLE C.5.1-J9.0. J9.0 to Link 11/11B Message Translation Tree (Sheet 3 of 5)

NOTES

1. The collective address of 0177 (octal) is included as one for which data are being forwarded. The FJU may forward J9.0 Command messages to a link other than the one on which the addressee is active. In this case, R/C procedures do not apply. (See paragraph C.4.8.4)
2. If the addressee is not active, the FJU may forward M.15 Command values 0-8 and transmit a J9.0 CANTPRO back to the originator. If the FJU does not forward M.15 Command values 0-8, the message shall be discarded and a J9.0 CANTPRO shall be transmitted back to the originator. (See paragraph C.4.8.4)

APPENDIX C

TABLE C.5.1-J9.0. J9.0 to Link 11/11B Message Translation Tree (Sheet 4 of 5)

RELATED MESSAGES

RECEIVED LINK 16
MESSAGE

J9.0

ALL POSSIBLE LINK 11/11B MESSAGES
THAT MAY BE REQUIRED

M.9E
M.10A
M.15

APPENDIX C

TABLE C.5.1-J9.0. J9.0 to Link 11/11B Message Translation Tree (Sheet 5 of 5)

FORWARDING TRANSMIT REQUIREMENTS

1. The M.15 message with other than R/C = 1 shall be redundantly forwarded until a Machine Receipt, or other appropriate reply, is received or until redundancy requirements are met. When redundancy requirements are met and a reply has not been received for an Original (R/C = 0) Command message, the FJU shall reply on Link 16 with a CANTPRO (R/C = 21).

2. The M.15 message with R/C = 1 shall be forwarded seven times on Link 11/11B. The redundant J9.0 R/C = 1 messages received will be discarded.

DATA RETENTION RULES

There are no Data Retention Rules associated with this message translation.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.1-J10.2. J10.2 to Link 11/11B Message Translation Tree (Sheet 1 of 4)

TEST NODE DIAGRAM					TEST NODE CONDITION	NOTES
	1	N	2	2	1. SINGLE ENGAGEMENT STATUS REPORTED.	
	2	N	2	2	2. IS THERE A WES = 5, 8, OR 9.	1
	3	N	3	3	3. IS THERE A WES = 2-4, 6, 7, OR 10-14.	1
					REQUIRED ACTION	
A	A	A			A. FWD M.14 SEVEN TIMES FOR EACH W/ES = 5, 8, OR 9.	
B	B		B		B. FWD M.14 ONE TIME FOR EACH W/ES = 2-4, 6, 7, OR 10-14.	
Z	Z	Z	Z	Z	Z. END TRANSLATION.	

APPENDIX C

TABLE C.5.1-J10.2. J10.2 to Link 11/11B Message Translation Tree (Sheet 2
of 4)

NOTES

1. A J10.2 message with Weapon Engagement Status (WES) equal to 0 or 1 will not be forwarded.

APPENDIX C

TABLE C.5.1-J10.2. J10.2 to Link 11/11B Message Translation Tree (Sheet 3
of 4)

RELATED MESSAGES

RECEIVED LINK 16
MESSAGE

J10.2

ALL POSSIBLE LINK 11/11B MESSAGES
THAT MAY BE REQUIRED

M.14

APPENDIX C

TABLE C.5.1-J10.2. J10.2 to Link 11/11B Message Translation Tree (Sheet 4 of 4)

FORWARDING TRANSMIT REQUIREMENTS

1. The J10.2C1 word is used to report multiple engagements. Separate M.14 message sequences will be generated for each engagement received.
2. One M.14 message will be forwarded for each Weapon Engagement Status received unless W/ES = 5, 8, or 9.
3. M.14 W/ES = 5, 8, or 9 message(s) will be forwarded in seven consecutive transmit opportunities. The redundant J10.2 message received will be discarded. When Weapon Engagement Status changes from 5 or 8 for identical TN Friendly Weapon System and TN Target, prior to completion of redundant transmissions, the previous values will no longer be reported.

DATA RETENTION RULES

There are no Data Retention Rules associated with this message translation.

TABLE C.5.1-J10.3. J10.3 to Link 11/11B Message Translation Tree (Sheet 1 of 5)

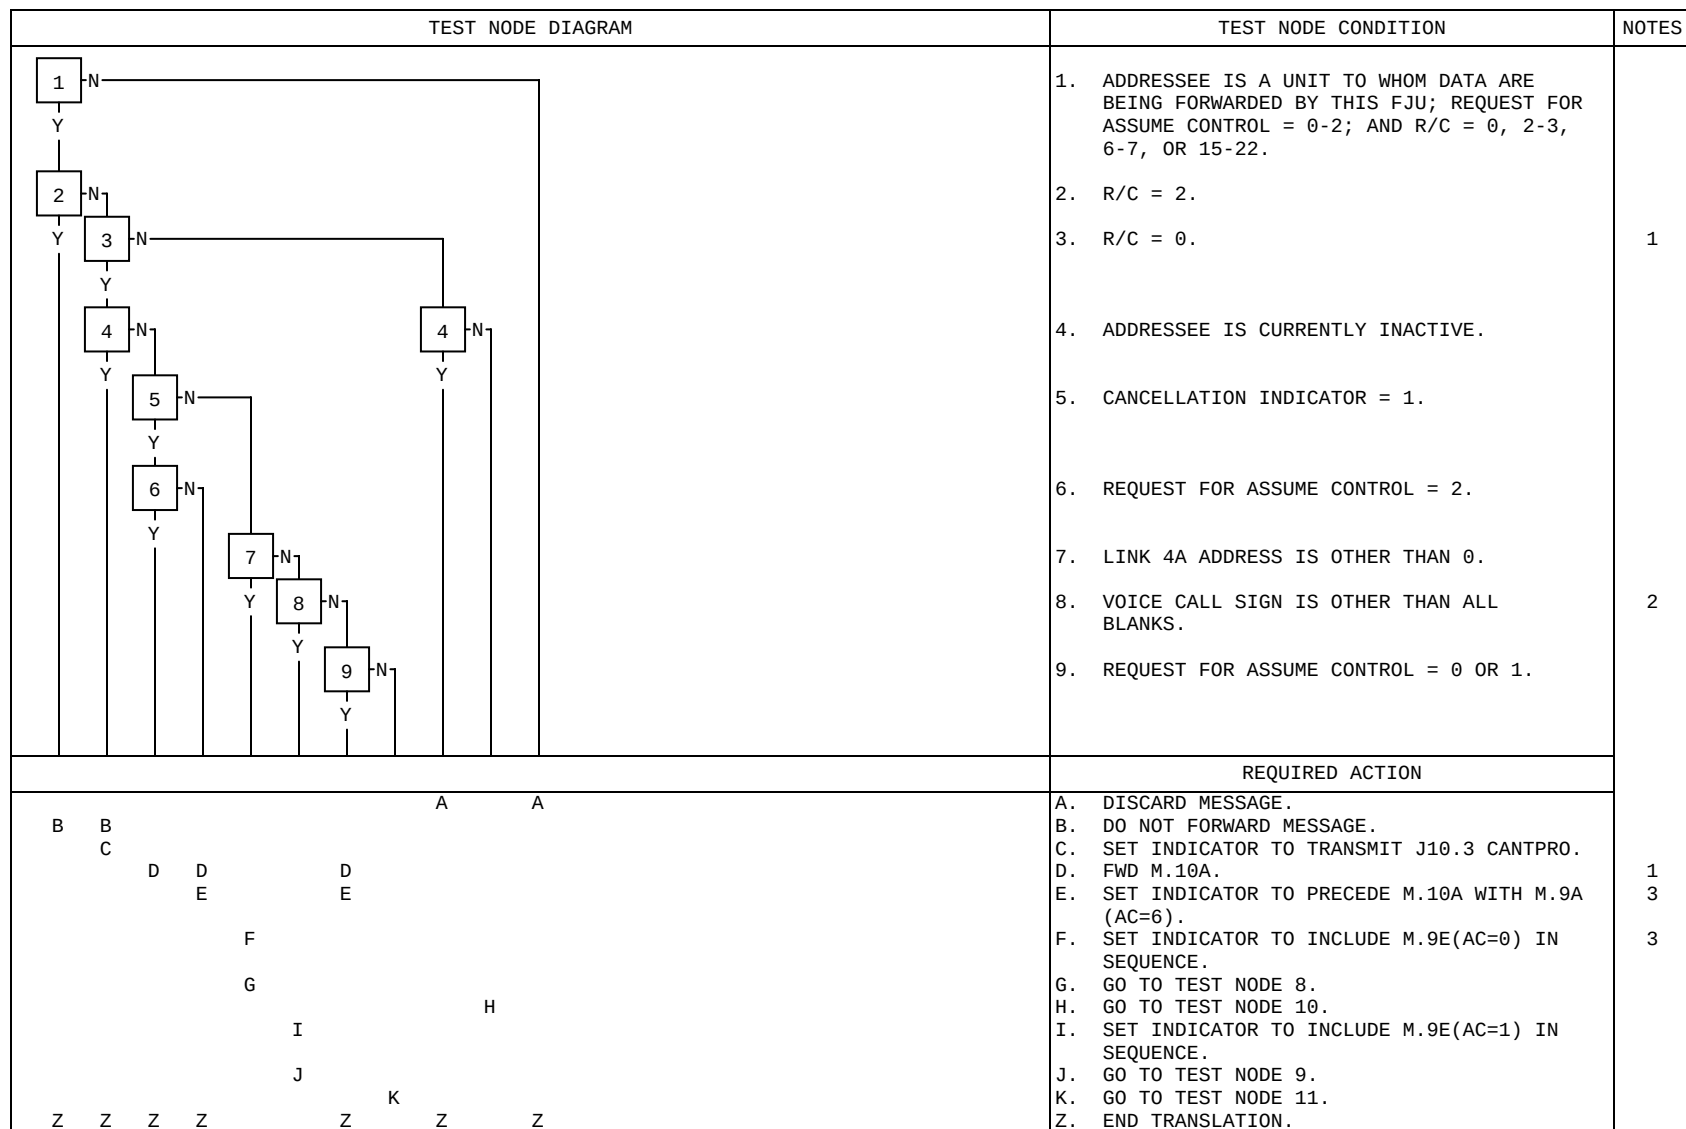


TABLE C.5.1-J10.3. J10.3 to Link 11/11B Message Translation Tree (Sheet 2 of 5)

TEST NODE DIAGRAM	TEST NODE CONDITION	NOTES
<pre> graph TD 10 -- N --> 10 10 -- Y --> 11 11 -- N --> 11 11 -- Y --> 12 12 -- N --> 10 12 -- Y --> 13 13 -- N --> 11 13 -- Y --> 10 </pre>	10. R/C = 3. 11. LINK 4A FREQUENCY IS OTHER THAN NO STATEMENT. 12. VOICE FREQUENCY/CHANNEL INDICATOR = 0. 13. VOICE FREQUENCY IS OTHER THAN NO STATEMENT.	
D D D D D L M N Z Z Z Z	REQUIRED ACTION D. FWD M.10A. L. SET INDICATOR TO INCLUDE M.9E(AC=4) IN SEQUENCE. M. GO TO TEST NODE 12. N. SET INDICATOR TO INCLUDE M.9E(AC=2) IN SEQUENCE. Z. END TRANSLATION.	1

APPENDIX C

TABLE C.5.1-J10.3. J10.3 to Link 11/11B Message Translation Tree (Sheet 3 of 5)

NOTES

1. The FJU responds to each J10.3 message, which is not discarded, with a J10.3 CANTPRO message or a J10.3 Machine Receipt (MR) message. The FJU shall originate a J10.3 CANTPRO response message only to a J10.3 Original (R/C = 0) Handover message and then only in those cases shown in this table. The FJU shall respond with a J10.3 MR message for those J10.3 messages that are accepted for forwarding. The FJU then forwards the proper handover sequence to the addressee on the appropriate data link. If the FJU fails to receive an M.10A MR message or other reply, the sequence is repeated until seven attempts have been made to forward the data. If after seven attempts an M.10A MR message or other reply is not received, the FJU shall send a J10.3 CANTPRO (R/C = 21) message addressed to the originator of the J10.3 Original (R/C = 0) message. If an M.10A MR message is not received for a J10.3 WILCO, CANTCO, or CANTPRO reply message forwarded to Link 11/11B after seven attempts to forward, the FJU takes no further action. If a reply is received from the addressee prior to the transmission of a J10.3 MR message originated by the FJU, that reply may be transmitted instead of the FJU's J10.3 MR message.
2. The Voice Call Sign forwarded shall be limited to the Voice Call Sign contained within the J10.3 message being forwarded. A voice call sign held in the FJU database or received in another message shall not be included in the handover sequence.
3. The handover sequence for an original J10.3 (R/C = 0) message being forwarded on Link 11/11B includes, in order, an M.9A(AC=6) message as indicated in the message translation tree, an M.10A message, followed by appropriate M.9E messages. The sequence for a J10.3 WILCO (R/C = 3) message being forwarded on Link 11/11B is an M.10A message followed by appropriate M.9E messages. Other J10.3 message replies on Link 11/11B are sent an M.10A message alone. In case of redundant Link 11/11B transmissions being required, the full sequence is repeated with each transmission opportunity.

APPENDIX C

TABLE C.5.1-J10.3. J10.3 to Link 11/11B Message Translation Tree (Sheet 4 of 5)

RELATED MESSAGES

RECEIVED LINK 16
MESSAGE

J10.3

ALL POSSIBLE LINK 11/11B MESSAGES
THAT MAY BE REQUIRED

M.9A(AC=6)
M.9E(AC=0-2 OR 4)
M.10A

APPENDIX C

TABLE C.5.1-J10.3. J10.3 to Link 11/11B Message Translation Tree (Sheet 5 of 5)

FORWARDING TRANSMIT REQUIREMENTS

The appropriate handover sequence shall be redundantly forwarded until a machine receipt, or other appropriate reply, is received or until redundancy requirements are met. When redundancy requirements are met and a reply has not been received for a forwarded Original (R/C = 0) Handover message, the FJU shall reply on Link 16 with a CANTPRO (R/C = 21).

DATA RETENTION RULES


There are no Data Retention Rules associated with this message translation.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.1-J10.5. J10.5 to Link 11/11B Message Translation Tree (Sheet 1 of 3)

TEST NODE DIAGRAM		TEST NODE CONDITION	NOTES
		1. VOICE CALL SIGN = ALL BLANKS.	
		REQUIRED ACTION	
A	A	A. FWD M.9A(AC=6).	
	B	B. FWD M.9E(AC=1).	
Z	Z	Z. END TRANSLATION.	

APPENDIX C

TABLE C.5.1-J10.5. J10.5 to Link 11/11B Message Translation Tree (Sheet 2
of 3)

RELATED MESSAGES

RECEIVED LINK 16
MESSAGE

J10.5

ALL POSSIBLE LINK 11/11B MESSAGES
THAT MAY BE REQUIRED

M.9A(AC=6)

M.9E(AC=1)

APPENDIX C

TABLE C.5.1-J10.5. J10.5 to Link 11/11B Message Translation Tree (Sheet 3 of 3)

FORWARDING TRANSMIT REQUIREMENTS

1. A single M.9A(AC=6) message shall be forwarded for each J10.5 message received.
2. A single M.9E(AC=1) message shall be forwarded for each J10.5 message received that contains a valid voice call sign.

DATA RETENTION RULES


There are no Data Retention Rules associated with this message translation.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.1-J10.6. J10.6 to Link 11/11B Message Translation Tree (Sheet 1 of 3)

TEST NODE DIAGRAM		TEST NODE CONDITION	NOTES
		1. PAIRING ACTION = 0-7 OR 15.	
		REQUIRED ACTION	
A B Z Z		A. DISCARD MESSAGE. B. FWD M.9B. Z. END TRANSLATION.	

APPENDIX C

TABLE C.5.1-J10.6. J10.6 to Link 11/11B Message Translation Tree (Sheet 2
of 3)

RELATED MESSAGES

RECEIVED LINK 16
MESSAGE

J10.6

ALL POSSIBLE LINK 11/11B MESSAGES
THAT MAY BE REQUIRED

M.9B(AC = 0-5 or 15)

APPENDIX C

TABLE C.5.1-J10.6. J10.6 to Link 11/11B Message Translation Tree (Sheet 3 of 3)

FORWARDING TRANSMIT REQUIREMENTS

Each J10.6 message received by the FJU shall cause one M.9B message to be forwarded on Link 11/11B.

DATA RETENTION RULES

There are no Data Retention Rules associated with this message translation.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

C-221

APPENDIX C

MIL-STD-6016B

TABLE C.5.1-J13.2. J13.2 to Link 11/11B Message Translation Tree (Sheet 2 of 5)

TEST NODE DIAGRAM	TEST NODE CONDITION	NOTES
<pre> graph TD 10[10] -- N --> 11a[11] 10 -- Y --> 11b[11] 11a -- N --> 12[12] 11a -- Y --> 13[13] 12 -- N --> 13 12 -- Y --> 14[14] 13 -- N --> 14 13 -- Y --> 15[15] 14 -- N --> 15 14 -- Y --> 15 15 -- N --> 15 15 -- Y --> 15 </pre>	10. TIME REPORT FUNCTION = 4. 11. FUEL FUNCTION = 0. 12. FUEL NOT EQUAL TO NO STATEMENT. 13. AIR SPECIFIC TYPE TRANSLATES TO OTHER THAN NO STATEMENT IN M.11B. 14. NUMBER AND TYPE OF STORES TRANSLATES TO WEAPON TYPE. 15. GUN CAPABLE = 1.	2 3
A H I Z I Z H Z H Z H Z H Z Z	REQUIRED ACTION A. DISCARD MESSAGE. H. FWD M.11B(FT SW=0). I. FWD M.11B(FT SW=1). Z. END TRANSLATION.	

C-222

APPENDIX C

MIL-STD-6016B

APPENDIX C

TABLE C.5.1-J13.2. J13.2 to Link 11/11B Message Translation Tree (Sheet 3 of 5)

NOTES

1. The following Link 16 Air Specific Type values are translatable to other than No Statement in the M.11C message: 532, 533, 543, 544, 563, 565-570, 575, 1297-1299, 1311, and 1345.
2. The following Link 16 Air Specific Type values are translatable to other than No Statement in the M.11B message: 1-8, 10-12, 14, 24-26, 256-259, 264, and 265.
3. The following Link 16 Type of Stores values are translatable to the M.11B message: 1, 2, 3, and 11 (if the corresponding Number of Stores is other than zero).

APPENDIX C

TABLE C.5.1-J13.2. J13.2 to Link 11/11B Message Translation Tree (Sheet 4
of 5)

RELATED MESSAGES

RECEIVED LINK 16
MESSAGE

J13.2

ALL POSSIBLE LINK 11/11B MESSAGES
THAT MAY BE REQUIRED

M.11B
M.11C(LINK 11 ONLY)
M.14

APPENDIX C

TABLE C.5.1-J13.2. J13.2 to Link 11/11B Message Translation Tree (Sheet 5 of 5)

FORWARDING TRANSMIT REQUIREMENTS

1. An M.11B or M.11C and/or M.14 message or series of messages shall be transmitted for each J13.2 message received. There are no cases where both the M.11B and the M.11C message will be forwarded for a single J13.2 message received. An M.14 and either an M.11B or M.11C message or series of messages may result from a J13.2 message received.
2. When an M.11B message is forwarded for a J13.2 message received from a JU under own unit control, the FJU shall replace controller manually entered platform status data for the JU with non-zero platform status data from the last received J13.2 message prior to forwarding the M.11B message.
3. When the J13.2 message reports time remaining on station and pounds of fuel, two M.11B messages shall be transmitted with identical information with the exception of the Fuel/Time Switch and Fuel/Time fields.
4. When the J13.2 message contains data that result in a series of two or three M.11C messages, each M.11C message shall be transmitted with identical A-Frames.

DATA RETENTION RULES


There are no Data Retention Rules associated with this message translation.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.1-J13.3. J13.3 to Link 11/11B Message Translation Tree (Sheet 1 of 4)

TEST NODE DIAGRAM		TEST NODE CONDITION	NOTES
 <pre> graph TD N1[1] -- Y --> Y1[] N1 -- N --> N2[2] N2 -- Y --> Y2[] N2 -- N --> N3[] style Y1 fill:none,stroke:none style Y2 fill:none,stroke:none style N3 fill:none,stroke:none </pre>		1. RECEIVED J13.3 DOES NOT INCLUDE A J13.3C1, C5, C6, OR C7 WORD. 2. J13.3C1, C5, C6, OR C7 WORD CONTAINS MISSILE TYPE VALUE = 0-6, 8-27, OR 57-63.	1
		REQUIRED ACTION	
A	A	A. DISCARD MESSAGE.	
Z	B Z	B. FWD M.14.	
Z	Z	Z. END TRANSLATION.	

APPENDIX C

TABLE C.5.1-J13.3. J13.3 to Link 11/11B Message Translation Tree (Sheet 2 of 4)

NOTES

1. To satisfy this test node, the Missile Type, 1 through 12 fields must be checked to determine the necessity of forwarding multiple M.14 messages.

APPENDIX C

TABLE C.5.1-J13.3. J13.3 to Link 11/11B Message Translation Tree (Sheet 3
of 4)

RELATED MESSAGES

RECEIVED LINK 16
MESSAGE

J13.3

ALL POSSIBLE LINK 11/11B MESSAGES
THAT MAY BE REQUIRED

M.14

APPENDIX C

TABLE C.5.1-J13.3. J13.3 to Link 11/11B Message Translation Tree (Sheet 4 of 4)


FORWARDING TRANSMIT REQUIREMENTS

One or two M.14 messages shall be transmitted for each missile type in the received J13.3 message.

DATA RETENTION RULES

There are no Data Retention Rules associated with this message translation.

TABLE C.5.1-J13.4. J13.4 to Link 11/11B Message Translation Tree (Sheet 1 of 4)

TEST NODE DIAGRAM		TEST NODE CONDITION	NOTES
 <pre>graph TD N1[1] -- Y --> Y1[] N1 -- N --> N2[2] N2 -- Y --> Y2[] N2 -- N --> N3[] Y1 --- Y1_end[] Y2 --- Y2_end[] N3 --- N3_end[] style Y1_end fill:none,stroke:none style Y2_end fill:none,stroke:none style N3_end fill:none,stroke:none</pre>		1. RECEIVED J13.4 DOES NOT INCLUDE A J13.4C1 WORD. 2. J13.4C1 WORD CONTAINS MISSILE TYPE VALUE = 0-6, 8-17, 24-26, OR 57-63.	1
		REQUIRED ACTION	
A	A	A. DISCARD MESSAGE.	
Z	B Z	B. FWD M.14.	
Z	Z	Z. END TRANSLATION.	

APPENDIX C

TABLE C.5.1-J13.4. J13.4 to Link 11/11B Message Translation Tree (Sheet 2
of 4)

NOTES

1. To satisfy this test node, the Missile Type, 1, 2, and 3 fields must be checked to determine the necessity of forwarding multiple M.14 messages.

APPENDIX C

TABLE C.5.1-J13.4. J13.4 to Link 11/11B Message Translation Tree (Sheet 3
of 4)

RELATED MESSAGES

RECEIVED LINK 16
MESSAGE

J13.4

ALL POSSIBLE LINK 11/11B MESSAGES
THAT MAY BE REQUIRED

M.14

APPENDIX C

TABLE C.5.1-J13.4. J13.4 to Link 11/11B Message Translation Tree (Sheet 4 of 4)


FORWARDING TRANSMIT REQUIREMENTS

One or two M.14 messages shall be transmitted for each missile type in the received J13.4 message.

DATA RETENTION RULES

There are no Data Retention Rules associated with this message translation.

TABLE C.5.1-J13.5. J13.5 to Link 11/11B Message Translation Tree (Sheet 1 of 3)

TEST NODE DIAGRAM		TEST NODE CONDITION	NOTES
 <pre>graph TD N1[1] -- Y --> Y1[] N1 -- N --> N2[2] N2 -- Y --> Y2[] N2 -- N --> Y2 Y1 --- Y2 Y2 --- A1[A] Y2 --- A2[A] Y2 --- Z1[Z] Y2 --- Z2[Z]</pre>		1. OPERATIONAL CAPABILITY, HOT INVENTORY, AND COLD INVENTORY ARE ALL NO STATEMENT. 2. SITE TYPE IS 10-16, OR 28.	
		REQUIRED ACTION	
A A B Z Z Z		A. DISCARD MESSAGE. B. FWD M.14 MESSAGE. Z. END TRANSLATION.	

APPENDIX C

TABLE C.5.1-J13.5. J13.5 to Link 11/11B Message Translation Tree (Sheet 2
of 3)

RELATED MESSAGES

RECEIVED LINK 16
MESSAGE

J13.5

ALL POSSIBLE LINK 11/11B MESSAGES
THAT MAY BE REQUIRED

M.14

APPENDIX C

TABLE C.5.1-J13.5. J13.5 to Link 11/11B Message Translation Tree (Sheet 3 of 3)

FORWARDING TRANSMIT REQUIREMENTS

A single M.14 message shall be transmitted for each J13.5 Land (Ground) Platform and System Status message received.

DATA RETENTION RULES

There are no Data Retention Rules associated with this message translation.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.1-J14.0. J14.0 to Link 11/11B Message Translation Tree (Sheet 1 of 5)

TEST NODE DIAGRAM	TEST NODE CONDITION	NOTES
<pre> graph TD 1[1] -- Y --> 2[2] 1 -- N --> 3[3] 2 -- Y --> 3 2 -- N --> 4[4] 3 -- Y --> 4 3 -- N --> 5[5] 4 -- Y --> 5 4 -- N --> 6[6] 5 -- Y --> 6 5 -- N --> 7[7] 6 -- Y --> 7 6 -- N --> 8[8] 7 -- Y --> 8 7 -- N --> 9[9] 8 -- Y --> 9 8 -- N --> 10[10] 9 -- Y --> 10 9 -- N --> 11[11] </pre>	1. FIX OR BEARING DESCRIPTOR (F/B) = 6 OR TN, REFERENCE/INDEX NUMBER INDICATOR = 1. 2. F/B = 4. 3. BEARING ORIGIN = 1. 4. F/B = 1. 5. AREA MAJOR AXIS, AREA MINOR AXIS OR SQUARE/CIRCLE SWITCH = NO STATEMENT OR UNDEFINED. 6. COURSE OR SPEED = NO STATEMENT. 7. F/B = 5. 8. F/B = 0. 9. PARAMETER SOURCE = 3 OR 4.	
	REQUIRED ACTION	
A A B C D E F G Z Z K K K K K	A. DISCARD MESSAGE. B. FWD M.6A. C. FWD M.9F(AC=0)/M.89F(AC=0). D. FWD M.9F(AC=0)/M.89F(AC=0)/M.9F(AC=1). E. FWD M.6B/M.86B(EV SW=0). F. FWD M.5/M.85. G. GO TO TEST NODE 10. K. GO TO TEST NODE 15. Z. END TRANSLATION.	3 1 2

C-239

MIL-STD-6016B
APPENDIX C

TABLE C.5.1-J14.0. J14.0 to Link 11/11B Message Translation Tree (Sheet 2 of 5)

TEST NODE DIAGRAM	TEST NODE CONDITION	NOTES
<pre> graph TD 10[10] -- N --> 12[12] 10 -- Y --> 11[11] 11 -- N --> 12 11 -- Y --> 13[13] 12 -- N --> 13 12 -- Y --> 13 13 -- N --> 14[14] 13 -- Y --> 14 14 -- N --> 15[15] 14 -- Y --> 15 15 -- N --> 15 15 -- Y --> 15 </pre>	10. J14.0C4 WORD INCLUDED. 11. POLARIZATION, PULSE WIDTH, OR ANTENNA SCAN RATE/PERIOD INDICATOR NOT EQUAL TO 0. 12. FREQUENCY DATA INCLUDED. 13. EMITTER NUMBER INDICATOR = 1. 14. F/B = 0. 15. SPECIAL PROCESSING INDICATOR HAS CHANGED, THIS IS INITIAL REPORT FROM THE DATA SOURCE, OR RESPONSE INDICATOR = 1.	
A H E E E I J J K K K K L M M Z Z Z	REQUIRED ACTION A. DISCARD MESSAGE. E. FWD M.6B/M.86B(EV SW=0). H. FWD M.6C/M.86C. I. FWD M.6C. J. FWD M.6B/M.86B (EV SW=1). K. GO TO TEST NODE 15. L. FWD APPROPRIATE INITIAL SEQUENCE. M. GO TO TEST NODE 12. Z. END TRANSLATION.	3

APPENDIX C

TABLE C.5.1-J14.0. J14.0 to Link 11/11B Message Translation Tree (Sheet 3 of 5)

NOTES

1. If both the Frequency, 1 value in the J14.0E0 and the Elevation Angle value in the J14.0C2 are not No Statement, then consecutive M.6A messages shall be forwarded with Switch = 0 and Switch = 1, respectively.
2. The Switch value is set to 0 when Course and Speed are reported as No Statement. The Switch value is set to 1 if Minute and Hour or Altitude, 25 Ft are other than No Statement. If both Switch = 0 and 1 are required, the M.5/M.85(SW=0) shall be immediately followed by an identical M.5, followed by an M.85(SW=1).
3. If an M.6C or an M.6C/M.86C message results with no M.6B being transmitted, the received J14.0 message is discarded and not forwarded.

APPENDIX C

TABLE C.5.1-J14.0. J14.0 to Link 11/11B Message Translation Tree (Sheet 4 of 5)

RELATED MESSAGES

RECEIVED LINK 16
MESSAGE

J14.0

ALL POSSIBLE LINK 11/11B MESSAGES
THAT MAY BE REQUIRED

M.5
M.85
M.6A
M.6B
M.86B
M.6C
M.86C
M.9A
M.9F(0)
M.89F(0)
M.9F(1)

APPENDIX C

TABLE C.5.1-J14.0. J14.0 to Link 11/11B Message Translation Tree (Sheet 5 of 5)

FORWARDING TRANSMIT REQUIREMENTS

1. The M.5 initial sequence shall be transmitted by the FJU once in each of two successive transmission opportunities on Link 11. The M.5 initial sequence shall be transmitted by the FJU at the first transmission opportunity and every transmission opportunity thereafter until the M.9A(AC=0) message is acknowledged on Link 11B.
2. The FJU shall transmit the M.6A, M.6B, or M.6C initial sequence on Link 11B immediately preceded by an M.9A(AC=0) message at the first transmission opportunity and every opportunity thereafter until the M.9A(AC=0) message is acknowledged.
3. The M.5/M.85, M.6A, M.6B/M.86B, M.6C, or the M.6C/M.86C shall be transmitted once in each of two consecutive transmission opportunities on Link 11 and once on Link 11B except as required by rules 1 and 2 above.
4. The FJU shall transmit the M.9F(AC=0)/M.89F(AC=0) or M.9F(AC=0)/M.89F(AC=0)/M.9F(AC=1) initial sequence on Link 11B immediately preceded by an M.9A(AC=0) message at the first transmission opportunity and every transmission opportunity thereafter until the M.9A(AC=0) is acknowledged.
5. The M.9F(AC=0)/M.89F(AC=0) and M.9F(AC=0)/M.89F(AC=0)/M.9F(AC=1) shall be transmitted once in each of two consecutive transmission opportunities, except as required by rule 4 above.

DATA RETENTION RULES

There are no Data Retention Rules associated with this message translation.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.1-J14.2. J14.2 to Link 11/11B Message Translation Tree (Sheet 1 of 5)

TEST NODE DIAGRAM	TEST NODE CONDITION	NOTES
<pre> graph TD 1[1] -- N --> A[A] 1 -- Y --> 2[2] 2 -- N --> 3[3] 2 -- Y --> E[E] 3 -- N --> 5[5] 3 -- Y --> 4[4] 4 -- N --> F[F] 4 -- Y --> 6[6] 5 -- N --> 7[7] 5 -- Y --> 6 6 -- N --> F 6 -- Y --> 8[8] 7 -- N --> G[G] 7 -- Y --> 8 8 -- N --> F 8 -- Y --> Z[Z] </pre>	1. ADDRESSEE IS A UNIT TO WHOM DATA ARE BEING FORWARDED BY THIS FJU AND ELECTRONIC WARFARE ACTION VALUE (EWAC) IS OTHER THAN 25, 27-29, OR 32-63. 2. EWAC NOT EQUAL TO 0-14. 3. EWAC = 4. 4. J14.2C1, J14.2C3, OR J14.2C4 WORD NOT INCLUDED. 5. EWAC = 0, 2, OR 3. 6. TN, ADDRESSEE = 0177 (OCTAL). 7. EWAC = 5, 6, 11, OR 12. 8. REFERENCE EWAC NOT EQUAL TO 0-4, 13, OR 14.	1
	REQUIRED ACTION	
E E F E F E F G Z	A. DISCARD MESSAGE. E. GO TO TEST NODE 16. F. GO TO TEST NODE 13. G. GO TO TEST NODE 9. Z. END TRANSLATION.	

C-245

TABLE C.5.1-J14.2. J14.2 to Link 11/11B Message Translation Tree (Sheet 2 of 5)

TEST NODE DIAGRAM	TEST NODE CONDITION	NOTES
<pre> graph TD 9[9] -- N --> 11[11] 9 -- Y --> 10[10] 10 -- N --> 11 10 -- Y --> 12[12] 11 -- N --> 13[13] 11 -- Y --> 12 12 -- N --> 13 12 -- Y --> 14[14] 13 -- N --> 16[16] 13 -- Y --> 14 14 -- N --> 16 14 -- Y --> 15[15] 15 -- N --> 16 15 -- Y --> 16 16 -- N --> 16 16 -- Y --> 16 </pre>	9. EWAC = 7. 10. EMITTER NUMBER INDICATOR NOT EQUAL TO 1, MODE NUMBER = 0, AND EMITTER CONFIDENCE = 0. 11. EWAC = 13 OR 14. 12. J14.2C1 WORD NOT INCLUDED. 13. ADDRESSEE ACTIVE. 14. R/C = 0, 1, 6-14, OR 16-21. 15. EWAC = 4 AND J14.2C1 OR J14.2C3 WORD INCLUDED. 16. R/C = 0.	
B B A A D E F E F H Z Z Z Z Z	REQUIRED ACTION A. DISCARD MESSAGE. B. FWD M.6D. D. SET INDICATOR TO TRANSMIT J14.2 CANTPRO. E. GO TO TEST NODE 16. F. GO TO TEST NODE 13. H. FWD M.86D. Z. END TRANSLATION.	

C-246

APPENDIX C

MIL-STD-6016B

APPENDIX C

TABLE C.5.1-J14.2. J14.2 to Link 11/11B Message Translation Tree (Sheet 3
of 5)

NOTES

1. The collective address of 0177 (octal) is included as one for which data are being forwarded.

APPENDIX C

TABLE C.5.1-J14.2. J14.2 to Link 11/11B Message Translation Tree (Sheet 4
of 5)

RELATED MESSAGES

RECEIVED LINK 16
MESSAGE

J14.2

ALL POSSIBLE LINK 11/11B MESSAGES
THAT MAY BE REQUIRED

M.6D
M.86D

APPENDIX C

TABLE C.5.1-J14.2. J14.2 to Link 11/11B Message Translation Tree (Sheet 5 of 5)

FORWARDING TRANSMIT REQUIREMENTS

1. The M.6D(Control=0-7, 14, or 15) message with R/C $\neq$ 1 shall be redundantly forwarded until a Machine Receipt, or other appropriate reply, is received or until redundancy requirements are met. When redundancy requirements are met and a reply has not been received for an Original (R/C=0) message, the FJU shall reply on Link 16 with a CANTPRO (R/C = 21).
2. The M.6D(Control=0-7) message with R/C = 1 shall be forwarded seven times on Link 11/11B. The redundant J14.2 R/C = 1 messages received shall be discarded.
3. The M.6D(Control=14 or 15) message with R/C = 1 shall be forwarded two times on Link 11/11B. The redundant J14.2 R/C = 1 messages received shall be discarded.
4. The M.6D(Control=8-13) message shall be forwarded two times on Link 11/11B. The redundant J14.2 R/C = 1 messages received shall be discarded.

DATA RETENTION RULES


There are no Data Retention Rules associated with this message translation.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.1-M.x. M-Series to Link 16 Message Translation Tree

TEST NODE DIAGRAM		TEST NODE CONDITION	NOTES
		1. RECEIVED MESSAGE IS M.0, M.9D, M.9G, M12 SERIES, M.12.31, OR M.13.	
		REQUIRED ACTION	
A B Z		A. DISCARD MESSAGE. B. GO TO APPROPRIATE MESSAGE TRANSLATION TREE. Z. END TRANSLATION.	

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

C-253

APPENDIX C

APPENDIX C

TABLE C.5.1-M.1. M.1/M.81/M.11D to Link 16 Message Translation Tree (Sheet
2 of 4)

NOTES

1. The locations of all units in the Link 11/11B interface must be reported either in the M.1 Data Reference Position message or the M.5 Special Points Position message. However, systems may, in the same Link 11 transmit opportunity, report unit location in M.1's having R/P = 0 followed by a report of the SCC location in M.1's having R/P = 1, in which case, an M.5 message will not normally be received.
2. The FJU shall check to determine if M.11D message(s) having IFF/SIF data for the unit follow the M.1 or M.1/M.81 sequence. This check will terminate after three Link 11/11B message frame times.

APPENDIX C

TABLE C.5.1-M.1. M.1/M.81/M.11D to Link 16 Message Translation Tree (Sheet
3 of 4)

RELATED MESSAGES

RECEIVED LINK 11/11B
MESSAGE

M.1/M.81
M.11D

ALL POSSIBLE LINK 16 MESSAGES
THAT MAY BE REQUIRED

J2.0
J7.5

APPENDIX C

TABLE C.5.1-M.1. M.1/M.81/M.11D to Link 16 Message Translation Tree (Sheet
4 of 4)

FORWARDING TRANSMIT REQUIREMENTS

1. A single J2.0 message shall be transmitted for each M.1 message sequence received on Link 11. In cases where two separate M.1 message sequences are received during a single transmit opportunity, the FJU may transmit a single J2.0 or a separate J2.0 for each M.1 sequence.
2. J2.0 messages shall be redundantly transmitted for all active units received from Link 11B.
3. The J2.0C1 shall be transmitted by the FJU with the next periodic update of the J2.0B message when IFF/SIF data are received.

DATA RETENTION RULES

1. The FJU shall retain track and IFF/SIF data on all active PUs and RUs for whom data are being forwarded.
2. Timers shall be maintained on each active PU and RU being forwarded for proper initiation of update PPLI messages or Drop Track messages.

C-257



MIL-STD-6016B

APPENDIX C

TABLE C.5.1-M.2. M.2/M.82/M.11D to Link 16 Message Translation Tree (Sheet
2 of 4)

NOTES

1. The FJU shall check to determine if the next message received from the PU/RU Source is for the specified track number. This check will terminate after three Link 11/11B message frame times. Track report message sequences received from Link 11/11B include the following variations:

- o M.2,
- o M.2/M.82, or
- o M.2/M.82/M.2/M.82.

Additionally, M.11D messages may be included following the track report. The FJU shall include all data received when surveillance tracks are forwarded to Link 16.

2. Refer also to the M.11D to Link 16 message translation tree.

3. The FJU shall retain and update data received from the R² unit and track alert data or IFF/SIF clear data received from any source. The FJU shall forward all data held when the J3.2 message is transmitted. Additionally, the FJU shall retain and forward any values received from a JU for identity-related data (ref. section C.5.3, General Note 20) and for data elements not applicable to Link 11/11B.

4. When an ID or PRI AMP change is received without the amplifying message, all previously received M.82 message data will continue to be forwarded, except that the ID AMP will change to No Statement.

APPENDIX C

TABLE C.5.1-M.2. M.2/M.82/M.11D to Link 16 Message Translation Tree (Sheet
3 of 4)

RELATED MESSAGES

RECEIVED LINK 11/11B
MESSAGE

M.2/M.82
M.11D

ALL POSSIBLE LINK 16 MESSAGES
THAT MAY BE REQUIRED

J3.2
J7.5

APPENDIX C

TABLE C.5.1-M.2. M.2/M.82/M.11D to Link 16 Message Translation Tree (Sheet
4 of 4)

FORWARDING TRANSMIT REQUIREMENTS

1. When the initial sequence for an Air track is received from Link 11/11B, the FJU will set an indicator to initiate and transmit the appropriate J3.2 message with all data.
2. A J3.2I/J3.2E0 word sequence will be forwarded for each subsequent Link 11/11B Air Track message sequence received.
3. A J3.2I/J3.2E0/J3.2C1 word sequence will be transmitted every 8 transmissions of the J3.2B basic message for real-time Air tracks and will be reinitiated when: (1) M.11D IFF/SIF data are changed, (2) any M.2 or M.82 fields translatable to the J3.2C1 are changed, or (3) nonreal-time tracks are reported.

DATA RETENTION RULES

The FJU shall retain the latest reported ID, PRI AMP, ID AMP, IFF/SIF, and the status of the Emergency and Force Tell Indicators for all tracks being forwarded.

C-261



MIL-STD-6016B

APPENDIX C

TABLE C.5.1-M.3. M.3/M.83/M.11D to Link 16 Message Translation Tree (Sheet
2 of 4)

NOTES

1. The FJU shall check to determine if the next message received from the PU/RU Source is for the specified track number. This check will terminate after three Link 11/11B message frame times. Track report message sequences received from Link 11/11B include the following variations:

- o M.3,
- o M.3/M.83, or
- o M.3/M.83/M.3/M.83.

Additionally, M.11D messages may be included following the track report. The FJU shall include all data received when surveillance tracks are forwarded to Link 16.

2. Refer also to the M.11D to Link 16 message translation tree.

3. The FJU shall retain and update data received from the R² unit and track alert data or IFF/SIF clear data received from any source. The FJU shall forward all data held when the J3.3 message is transmitted. Additionally, the FJU shall retain and forward any values received from a JU for identity-related data (ref. section C.5.3, General Note 21) and for data elements not applicable to Link 11/11B.

4. When an ID or PRI AMP change is received without the amplifying message, all previously received M.83 message data will continue to be forwarded, except that the ID AMP will change to No Statement.

APPENDIX C

TABLE C.5.1-M.3. M.3/M.83/M.11D to Link 16 Message Translation Tree (Sheet
3 of 4)

RELATED MESSAGES

RECEIVED LINK 11/11B
MESSAGE

M.3/M.83

M.11D

ALL POSSIBLE LINK 16 MESSAGES
THAT MAY BE REQUIRED

J3.3

J7.5

APPENDIX C

TABLE C.5.1-M.3. M.3/M.83/M.11D to Link 16 Message Translation Tree (Sheet
4 of 4)

FORWARDING TRANSMIT REQUIREMENTS

1. When the initial sequence for a Surface track is received from Link 11/11B, the FJU will set an indicator to initiate and transmit the appropriate J3.3 message with all data.
2. A J3.3I/J3.3E0 word sequence will be forwarded for each subsequent Link 11/11B Surface Track message sequence received.
3. A J3.3I/J3.3E0/J3.3C1 word sequence will be transmitted every 8 transmissions of the J3.3B basic message for real-time Surface tracks and will be reinitiated when: (1) M.11D IFF/SIF data are changed, (2) any M.3 or M.83 fields translatable to the J3.3C1 are changed, or (3) nonreal-time tracks are reported.

DATA RETENTION RULES

The FJU shall retain the latest reported ID, PRI AMP, ID AMP, IFF/SIF, and the status of the Emergency and Force Tell Indicators for all tracks being forwarded.

TABLE C.5.1-M.4A. M.4A/M.84A/M.4B/M.11D to Link 16 Message Translation Tree (Sheet 1 of 4)

TEST NODE DIAGRAM		TEST NODE CONDITION	NOTES
		1. CLASSIFICATION = 0 AND CLASSIFICATION AMPLIFICATION = 1-7. 2. RECEIVED M.4A OR M.4A/M.84A IS/ARE FOLLOWED BY M.4B. 3. DATA REPORT TYPE = 0-2. 4. CLASSIFICATION = 4 AND CLASSIFICATION AMPLIFICATION = 2. 5. DATA REPORT TYPE = 3 AND ASW POINT TYPE = 12. 6. NEXT RECEIVED M.11D OR M.11D MESSAGE SEQUENCE HAS NONZERO CODES FROM PU/RU SOURCE FOR TN. 7. TYPE REPORT = 0.	1
		REQUIRED ACTION	
A A B B B A B B B A D D D B D D Z Z Z E Z Z Z Z Z Z Z E Z Z Z		A. DISCARD MESSAGE. B. FWD J3.4 MESSAGE. C. SET INDICATOR TO REINITIATE J3.4C1 WORD. D. FWD J3.0 MESSAGE. E. FWD J7.5 (ACT = 3). Z. END TRANSLATION.	2 3

C-265

MIL-STD-6016B
APPENDIX C

APPENDIX C

TABLE C.5.1-M.4A. M.4A/M.84A/M.4B/M.11D to Link 16 Message Translation Tree
(Sheet 2 of 4)

NOTES

1. The FJU shall check to determine if the next message received from the PU/RU Source is for the specified track number. This check will terminate after three Link 11/11B message frame times. Track report message sequences received from Link 11/11B include the following variations:

- o M.4A
- o M.4A/M.84A
- o M.4A/M.84A/M.4B (Link 11 only)
- o M.4A/M.4B (Link 11 only)

Additionally, an M.11D message may be included following the track report. The FJU shall include all data received when surveillance tracks are forwarded to Link 16.

If the received M.4B message does not follow an M.4A or M.84A message, refer to the M.4B to Link 16 message translation tree.

If the received M.11D message does not follow an M.4A, M.84A, or M.4B message, refer to the M.11D to Link 16 message translation tree.

2. The FJU shall retain and update data received from the R² unit and track alert data or IFF/SIF clear data received from any source. The FJU shall forward all data held when the J3.4 message is transmitted.

3. When reporting NOTACK Area or FWDA information both Time of Activation and Time of Deactivation must be specified. Two J3.0 messages shall be transmitted sequentially, the first with Time Function set to value 1 and the second with Time Function set to value 2.

MIL-STD-6016B

APPENDIX C

TABLE C.5.1-M.4A. M.4A/M.84A/M.4B/M.11D to Link 16 Message Translation Tree
(Sheet 3 of 4)

RELATED MESSAGES

RECEIVED LINK 11/11B
MESSAGE

ALL POSSIBLE LINK 16 MESSAGES
THAT MAY BE REQUIRED

M.4A/M.84A

J3.0

M.4B

J3.4

M.11D

J7.5

APPENDIX C

TABLE C.5.1-M.4A. M.4A/M.84A/M.4B/M.11D to Link 16 Message Translation Tree
(Sheet 4 of 4)

FORWARDING TRANSMIT REQUIREMENTS

1. When the initial sequence for a Subsurface track is received from Link 11/11B, the FJU shall set an indicator to initiate and transmit the appropriate J3.0 or J3.4 message with all data.
2. A J3.4I/J3.4E0 word sequence shall be forwarded for each subsequent Link 11/11B Subsurface track message sequence received.
3. A J3.4I/J3.4E0/J3.4C1 word sequence shall be transmitted when any field translatable to the J3.4C1 is received.
4. A J3.4I/J3.4E0/J3.4C2 word sequence shall be transmitted when DATUM Error is reported.
5. A J3.0I/J3.0E0 word sequence shall be forwarded for each subsequent Link 11/11B ASW Point message sequence received.
6. When defining a reference point which has course and speed, a J3.0I/J3.0E0/J3.0C2 word sequence shall be used.

DATA RETENTION RULES

The FJU shall retain the latest reported ID, IFF/SIF, and the status of the Emergency and Force Tell Indicators for all tracks being forwarded.

TABLE C.5.1-M.4B. M.4B to Link 16 Message Translation Tree (Sheet 1 of 4)

TEST NODE DIAGRAM		TEST NODE CONDITION	NOTES
<pre>graph TD 1[1] -- N --> 5[5] 1 -- Y --> 2[2] 2 -- N --> 3[3] 2 -- Y --> 4[4] 3 -- N --> 5 3 -- Y --> 4 4 -- N --> 5 4 -- Y --> 6[6] 5 -- N --> 5 5 -- Y --> 6 6 -- N --> 5 6 -- Y --> 6</pre>		1. RECEIVED M.4B HAS TN PREVIOUSLY REPORTED IN AN M.4 MESSAGE. 2. GMT CONTACT FIRST ACQUIRED OR GMT AT WHICH THE TRACK WAS OBSERVED AT THE POSITION PREVIOUSLY REPORTED IN M.4A, OR GMT AT WHICH DATUM WAS ESTABLISHED. 3. GMT OF EFFECTIVE COMMENCEMENT TIME FOR THE NOTACK AREA. 4. GMT AT WHICH THE ACOUSTIC BEARING WAS ESTABLISHED. 5. TIME SWITCH = 3. 6. M.4A DATA REPORT TYPE = 0-2.	1
		REQUIRED ACTION	
B C Z Z		A. DISCARD MESSAGE. B. FWD APPROPRIATE J3.4 MESSAGE. C. FWD APPROPRIATE J3.0 MESSAGE. D. FWD APPROPRIATE J5.4 MESSAGE. Z. END TRANSLATION.	
B D Z Z			
A Z			
A Z			
A Z			

C-269

APPENDIX C

TABLE C.5.1-M.4B. M.4B to Link 16 Message Translation Tree (Sheet 2 of 4)

NOTES

1. The FJU shall check to determine if the track number has been previously received in a valid M.4A, M.4C, or M.4D. An M.4B may be received alone in a transmission opportunity and is valid if the track number has been established in a valid M.4A, M.4C, or M.4D in a previous transmission opportunity. Message sequences received from Link 11 include the following variations:

- o M.4A/M.4B
- o M.4A/M.84A/M.4B
- o M.4B
- o M.4C/M.84C/M.4B
- o M.4D/M.84D/M.4B

Additionally, M.11D messages may be included following the track report. The FJU shall include all data received when surveillance tracks are forwarded to Link 16.

APPENDIX C

TABLE C.5.1-M.4B. M.4B to Link 16 Message Translation Tree (Sheet 3 of 4)

RELATED MESSAGES

RECEIVED LINK 11/11B
MESSAGE

M.4B

ALL POSSIBLE LINK 16 MESSAGES
THAT MAY BE REQUIRED

J3.0

J3.4

J5.4

APPENDIX C

TABLE C.5.1-M.4B. M.4B to Link 16 Message Translation Tree (Sheet 4 of 4)

FORWARDING TRANSMIT REQUIREMENTS

When an independent M.4B is received, the appropriate J3.0, J3.4 or J5.4 message shall be transmitted including the new M.4B data.

DATA RETENTION RULES

There are no Data Retention Rules associated with this message translation.

C-273

MIL-STD-6016B
APPENDIX C

APPENDIX C

TABLE C.5.1-M.4C. M.4C/M.84C/M.4B to Link 16 Message Translation Tree
(Sheet 2 of 4)

NOTES

1. The FJU shall check to determine if the next message received from the PU/RU source is for the specified track number. This check will terminate after three Link 11 message frame times. Message sequences received from Link 11 include the following variations:

- o M.4C/M.84C
- o M.4C/M.84C/M.4B

2. If the received M.4B message does not follow an M.84C message, refer to the M.4B to Link 16 Message Translation Tree.

MIL-STD-6016B

APPENDIX C

TABLE C.5.1-M.4C. M.4C/M.84C/M.4B to Link 16 Message Translation Tree
(Sheet 3 of 4)

RELATED MESSAGES

RECEIVED LINK 11/11B
MESSAGE

M.4C/M.84C
M.4B

ALL POSSIBLE LINK 16 MESSAGES
THAT MAY BE REQUIRED

J3.0
J5.4

APPENDIX C

TABLE C.5.1-M.4C. M.4C/M.84C/M.4B to Link 16 Message Translation Tree
(Sheet 4 of 4)

FORWARDING TRANSMIT REQUIREMENTS

1. When the initial sequence for sonobuoy or reference sonobuoy position is received from Link 11, the FJU shall set an indicator to initiate and transmit the appropriate J3.0 (Point Amplification 9 or 10) message with all data.
2. A J3.0I/J3.0E0 (Point Amplification 9 or 10) word sequence shall be forwarded for each subsequent Link 11 sonobuoy or reference sonobuoy position message sequence received.
3. A J3.0I/J3.0E0/J3.0C3 (Point Amplification 9 or 10) word sequence shall be forwarded when any field translatable to the J3.0C3 is received.
4. When the initial sequence for an Acoustic Bearing message is received from Link 11, the FJU shall set an indicator to initiate and transmit the appropriate J5.4 message with all data.
5. A J5.4I/J5.4E0 word sequence shall be forwarded for each subsequent Link 11 Acoustic Bearing message received.
6. A J5.4I/J5.4E0/J5.4C1 word sequence shall be forwarded when any field translatable to the J5.4C1 is received.

DATA RETENTION RULES

There are no Data Retention Rules associated with this message translation.

TABLE C.5.1-M.4D. M.4D/M.84D/M.4B to Link 16 Message Translation Tree (Sheet 1 of 4)

TEST NODE DIAGRAM		TEST NODE CONDITION	NOTES
<pre>graph TD 1[1] -- N --> Bottom1[] 1 -- Y --> 2[2] 2 -- N --> Bottom2[] 2 -- Y --> 3[3] 3 -- N --> Bottom3[] 3 -- Y --> 4[4] 4 -- N --> Bottom4[] 4 -- Y --> Bottom5[] style Bottom1 fill:none,stroke:none style Bottom2 fill:none,stroke:none style Bottom3 fill:none,stroke:none style Bottom4 fill:none,stroke:none style Bottom5 fill:none,stroke:none</pre>		1. RECEIVED M.4D IS FOLLOWED BY AN M.84D MESSAGE AND RECEIVED M.4D/M.84D MESSAGE SEQUENCE IS LEGAL. 2. RECEIVED M.4D/M.84D IS FOLLOWED BY AN M.4B MESSAGE. 3. BEARING REPORT TYPE = 1. 4. M.84D(SW=0) BEARING INDICATOR = 1 OR M.84D(SW=1) BEARING INDICATOR = 1, OR NO M.84D(SW=1) RECEIVED.	1 1, 2
		REQUIRED ACTION	
A A A B B Z Z Z Z Z		A. DISCARD MESSAGE. B. FWD J5.4 MESSAGE. Z. END TRANSLATION.	

C-277

APPENDIX C

TABLE C.5.1-M.4D. M.4D/M.84D/M.4B to Link 16 Message Translation Tree
(Sheet 2 of 4)

NOTES

1. Up to five M.4D and/or M.84D messages may be received in a legal M.4D/M.84D message sequence. After an M.4D message is received, the FJU must check the following messages until a message which is not an M.4D or M.84D from the same PU/RU source for the specified track number is received. The data from all messages in a legal M.4D/M.84D message sequence shall be forwarded in a single J5.4 message. The following are the only legal M.4D/M.84D message sequences:

- o M.4D(BSW=0 or 1), M.84D(SW=0).
- o M.4D(BSW=0 or 1), M.84D(SW=0), M.4D(BSW=2), M.84D(SW=1).
- o M.4D(BSW=0 or 1), M.84D(SW=0), M.4D(BSW=2), M.84D(SW=1), M.4D(BSW=3).
- o M.4D(BSW=0 or 1), M.84D(SW=0), M.4D(BSW=2), M.4D(BSW=3).
- o M.4D(BSW=0 or 1), M.84D(SW=0), M.4D(BSW=3).
- o M.4D(BSW=0 or 1), M.84D(SW=0), M.4D(BSW=2).

2. If the received M.4B message does not follow an M.84D message, refer to the M.4B to Link 16 Message Translation Tree.

MIL-STD-6016B

APPENDIX C

TABLE C.5.1-M.4D. M.4D/M.84D/M.4B to Link 16 Message Translation Tree
(Sheet 3 of 4)

RELATED MESSAGES

RECEIVED LINK 11/11B
MESSAGE

M.4D/M.84D
M.4B

ALL POSSIBLE LINK 16 MESSAGES
THAT MAY BE REQUIRED

J5.4

APPENDIX C

TABLE C.5.1-M.4D. M.4D/M.84D/M.4B to Link 16 Message Translation Tree
(Sheet 4 of 4)


FORWARDING TRANSMIT REQUIREMENTS

1. When the initial sequence for an ASW Bearing is received from Link 11, the FJU shall set an indicator to initiate and transmit the appropriate J5.4 message with all data.
2. A J5.4I/J5.4E0 word sequence shall be forwarded for each subsequent Link 11 Acoustic Bearing message received.
3. A J5.4I/J5.4E0/J5.4C1 and/or J5.4C2 word sequence shall be forwarded when any field translatable to the J5.4C1 and/or J5.4C2 is received.

DATA RETENTION RULES

There are no Data Retention Rules associated with this message translation.

C-281



APPENDIX C

TABLE C.5.1-M.5. M.5/M.85/M.11D to Link 16 Message Translation Tree (Sheet
2 of 4)

NOTES

1. The FJU will check to see if the next message received from the PU/RU source is related, e.g., M.5/M.85 message sequence, or is a second M.5/M.85 message sequence for the same object reporting M.85 alternative data. Note that in cases where the REF = 1 or 2 in the M.85 message, the M.5 message and the M.85 message will have different track numbers. The check will terminate upon receipt of an unrelated message or after three Link 11/11B time frames, whichever occurs first.

2. M.5 Point = 3 is not translated. M.5 Point = 11-12 are Undefined. The following Point Amplify values of Points other than 7 are Undefined:

<u>Point</u>	<u>Point Amplify</u>
0	1-7
1	1-7
5	4, 7
8	2-7
9	2-7
10	2-7
13	7

3. The FJU shall check to determine if M.11D message(s) having IFF/SIF data for the PU/RU follow(s) the M.5 or M.5/M.85 sequences. This check will terminate after three Link 11/11B message frame times.

4. The J2.0 message is not initiated by receipt of an M.5 message on Link 11. In cases where R/P=1 in the M.1 message, positional and other data are reported in M.5 or M.5/M.85 message(s). In these latter cases the most current M.5/M.85 data are included in J2.0 transmissions until superseded by a new M.5 or M.5/M.85 message sequence.

APPENDIX C

TABLE C.5.1-M.5. M.5/M.85/M.11D to Link 16 Message Translation Tree (Sheet
3 of 4)

RELATED MESSAGES

RECEIVED LINK 11/11B
MESSAGE

M.5

M.5/M.85

M.11D

ALL POSSIBLE LINK 16 MESSAGES
THAT MAY BE REQUIRED

J2.0

J3.0

J3.1

J3.5

J3.7

J7.5

J14.0

APPENDIX C

TABLE C.5.1-M.5. M.5/M.85/M.11D to Link 16 Message Translation Tree (Sheet
4 of 4)

FORWARDING TRANSMIT REQUIREMENTS

1. J2.0 messages are redundantly transmitted at the Link 16 rate for all active units that have been received on Link 11B. In all other cases a single Link 16 message shall be forwarded for each M.5 message or M.5/M.85 message sequence received. In cases where a second M.5/M.85 message sequence is received, reporting alternative data in the same opportunity, a single Link 16 message shall be forwarded.
2. The J2.0C1 shall be transmitted by the FJU with the next periodic update of the J2.0B message when IFF/SIF data are received.
3. Upon forwarding a J3.0 or J3.5 (PTI = 0) message, the FJU shall transmit periodic updates at a RRN = 3 (96 seconds, 1.2-2 minute interval) with the Periodic Report Indicator set to value 2.

DATA RETENTION RULES

1. The FJU shall retain track and IFF/SIF data on all PUs, RUs, and SUs being forwarded.
2. Timers shall be retained on each active IU being forwarded for proper initiation of update PPLI messages or Drop Track messages.

TABLE C.5.1-M.6A. M.6A to Link 16 Message Translation Tree (Sheet 1 of 4)

C-285

TEST NODE DIAGRAM	TEST NODE CONDITION	NOTES
<pre>graph TD 1[1] -- N --> A[A] 1 -- Y --> 2[2] 2 -- N --> A 2 -- Y --> 3[3] 3 -- N --> A 3 -- Y --> 4[4] 4 -- N --> A 4 -- Y --> 5[5] 5 -- N --> A 5 -- Y --> 6[6] 6 -- N --> A 6 -- Y --> A 7[7] -- N --> A 7 -- Y --> 8[8] 8 -- N --> A 8 -- Y --> 9[9] 9 -- N --> A 9 -- Y --> 10[10] 10 -- N --> A 10 -- Y --> 11[11] 11 -- N --> A 11 -- Y --> 12[12] 12 -- N --> A 12 -- Y --> A</pre>	1. TRACK NUMBER, ORIGIN HAS BEEN PREVIOUSLY REPORTED. 2. ACTION = 0. 3. SWITCH = 0. 4. FREQUENCY = NO STATEMENT. 5. PLATFORM = 1, 6, OR 7. 6. JAMMER RECEIVED SIGNAL LEVEL = 0.	1
REQUIRED ACTION		
B B B A C D D E F G H I J K L Z Z Z Z Z Z Z Z Z Z	A. DISCARD MESSAGE. B. FWD J3.7I/J3.7C1/J3.7C2. C. FWD J14.0I/J14.0E0/J14.0C1. D. FWD J3.7I/J3.7C1/J3.7C2/J3.7C4. E. FWD J14.0I/J14.0E0/J14.0C5. F. FWD J14.0I/J14.0E0. G. FWD J14.0I/J14.0C1/J14.0C5. H. FWD J14.0I/J14.0C1/J14.0C4/J14.0C5. I. FWD J14.0I/J14.0C1/J14.0C4. J. FWD J14.0I/J14.0C5. K. FWD J14.0I. L. FWD J14.0I/J14.0C1. Z. END TRANSLATION.	

APPENDIX C

TABLE C.5.1-M.6A. M.6A to Link 16 Message Translation Tree (Sheet 2 of 4)

NOTES

1. Simulated M.6A messages shall not be forwarded as J14.0 messages. (See paragraph C.4.8.5)

MIL-STD-6016B

APPENDIX C

TABLE C.5.1-M.6A. M.6A to Link 16 Message Translation Tree (Sheet 3 of 4)

RELATED MESSAGES

RECEIVED LINK 11/11B
MESSAGE

M.6A

ALL POSSIBLE LINK 16 MESSAGES
THAT MAY BE REQUIRED

J3.7

J14.0

APPENDIX C

TABLE C.5.1-M.6A. M.6A to Link 16 Message Translation Tree (Sheet 4 of 4)

FORWARDING TRANSMIT REQUIREMENTS

One J3.7 message and one J14.0 message shall be transmitted for each M.6A received.

DATA RETENTION RULES

There are no Data Retention Rules associated with this message translation.

TABLE C.5.1-M.6B. M.6B/M.86B to Link 16 Message Translation Tree (Sheet 1 of 4)

TEST NODE DIAGRAM	TEST NODE CONDITION	NOTES
	1. M.6B IMMEDIATELY FOLLOWED BY M.86B. 2. EVALUATION SWITCH = 0. 3. BEARING INDICATOR = 0. 4. PLATFORM = 0. 5. PLATFORM = 1, 6, OR 7.	1
	REQUIRED ACTION	
A B B C D D E E F G G H I J J K L M M N O Z Z Z Z Z Z Z Z Z Z Z Z	A. DISCARD MESSAGE. B. FWD J3.7I/J3.7C1/J3.7C2/J3.7C4. C. FWD J3.7I/J3.7C4. D. FWD J3.7I/J3.7C1/J3.7C4. E. FWD J3.7I/J3.7C1/J3.7C2/J3.7C3. F. FWD J3.7I/J3.7C3. G. FWD J3.7I/J3.7C1/J3.7C3. H. FWD J14.0I/J14.0E0/J14.0C1/J14.0C2/J14.0C5. I. FWD J14.0I/J14.0E0/J14.0C1/J14.0C2. J. FWD J14.0I/J14.0E0. K. FWD J14.0I/J14.0E0/J14.0C5. L. FWD J14.0I/J14.0C1/J14.0C2/J14.0C3/J14.0C5. M. FWD J14.0I/J14.0C1/J14.0C2/J14.0C3. N. FWD J14.0I/J14.0C3. O. FWD J14.0I/J14.0C3/J14.0C5. Z. END TRANSLATION.	2 2 2 2 2 2 2 2 2 2 2

C-289

APPENDIX C

MIL-STD-6016B

APPENDIX C

TABLE C.5.1-M.6B. M.6B/M.86B to Link 16 Message Translation Tree (Sheet 2 of 4)

NOTES

1. Simulated M.6B messages shall not be forwarded as J14.0 messages. (See paragraph C.4.8.5)
2. The FJU shall check to determine if the M.6B/M.86B is immediately followed by an M.6C or M.6C/M.86C for the specified track number. This check will terminate after three Link 11/11B message frame times. If the M.6C or M.6C/M.86C is received immediately after the M.6B, the J14.0C4 word shall also be included in this word sequence.

MIL-STD-6016B

APPENDIX C

TABLE C.5.1-M.6B. M.6B/M.86B to Link 16 Message Translation Tree (Sheet 3
of 4)

RELATED MESSAGES

RECEIVED LINK 11/11B
MESSAGE

M.6B

M.86B

ALL POSSIBLE LINK 16 MESSAGES
THAT MAY BE REQUIRED

J3.7

J14.0

APPENDIX C

TABLE C.5.1-M.6B. M.6B/M.86B to Link 16 Message Translation Tree (Sheet 4 of 4)


FORWARDING TRANSMIT REQUIREMENTS

One J3.7 message and one J14.0 message shall be transmitted for each M.6B/M.86B message sequence received.

DATA RETENTION RULES

There are no Data Retention Rules associated with this message translation.

TABLE C.5.1-M.6C. M.6C or M.6C/M.86C to Link 16 Message Translation Tree (Sheet 1 of 4)

TEST NODE DIAGRAM		TEST NODE CONDITION	NOTES
		1. M.6C IMMEDIATELY PRECEDED BY M.6B/M.86B WITH SAME TRACK NUMBER.	1
		REQUIRED ACTION	2
A B Z		A. DISCARD MESSAGE. B. FWD J14.0C4 WORD. Z. END TRANSLATION.	

MIL-STD-6016B

APPENDIX C

TABLE C.5.1-M.6C. M.6C or M.6C/M.86C to Link 16 Message Translation Tree
(Sheet 2 of 4)

NOTES

1. Simulated M.6C messages shall not be forwarded. (See paragraph C.4.8.5)
2. The J14.0C4 word shall be included in the J14.0 word sequence forwarding the M.6B/M.86B.

MIL-STD-6016B

APPENDIX C

TABLE C.5.1-M.6C. M.6C or M.6C/M.86C to Link 16 Message Translation Tree
(Sheet 3 of 4)

RELATED MESSAGES

RECEIVED LINK 11/11B
MESSAGE

M.6C
M.86C

ALL POSSIBLE LINK 16 MESSAGES
THAT MAY BE REQUIRED

J14.0

APPENDIX C

TABLE C.5.1-M.6C. M.6C or M.6C/M.86C to Link 16 Message Translation Tree
(Sheet 4 of 4)

FORWARDING TRANSMIT REQUIREMENTS

One J14.0 message shall be transmitted for each M.6C or M.6C/M.86C received.

DATA RETENTION RULES

There are no Data Retention Rules associated with this message translation.

C-297

APPENDIX C

MIL-STD-6016B

TABLE C.5.1-M.6D. M.6D or M.6D/M.86D to Link 16 Message Translation Tree (Sheet 2 of 5)

C-298

TEST NODE DIAGRAM	TEST NODE CONDITION	NOTES
<pre>graph TD 10[10] -- N --> 13[13] 10 -- Y --> 11[11] 11 -- N --> 13 11 -- Y --> 12[12] 12 -- N --> 13 12 -- Y --> 14[14] 13 -- N --> 14 13 -- Y --> 14 14 -- N --> 13 14 -- Y --> 14</pre>	10. CONTROL = 5. 11. FREQUENCY/FREQUENCY RANGE = 0. 12. EMITTER FUNCTION AND EMITTER NUMBER = 0. 13. CONTROL = 7, 12, OR 13 AND REFERENCED/ CANCELLED CONTROL VALUE IS OTHER THAN 5 THROUGH 13. 14. CONTROL = 14 OR 15.	
	REQUIRED ACTION	
A C G H I J Z	A. DISCARD MESSAGE. C. FWD J14.2I/J14.2E0. G. FWD J14.2I/J14.2E0/J14.2C1. H. FWD J14.2I/J14.2E0/J14.2C1/J14.2C3. I. FWD J14.2I/J14.2E0/J14.2C1/J14.2C3/ J14.2C4. J. FWD J14.2I/J14.2E0/J14.2C1/J14.2C4. Z. END TRANSLATION.	

APPENDIX C

TABLE C.5.1-M.6D. M.6D or M.6D/M.86D to Link 16 Message Translation Tree
(Sheet 3 of 5)

NOTES

1. The FJU shall discard all identical M.6D EW Control/Coordination (Addressee = 177 (octal) or no Addressee) messages received within 90 seconds after the initial message is received and forwarded.
2. The collective address of 177 (octal) is included as one for which data are being forwarded.

MIL-STD-6016B

APPENDIX C

TABLE C.5.1-M.6D. M.6D or M.6D/M.86D to Link 16 Message Translation Tree
(Sheet 4 of 5)

RELATED MESSAGES

RECEIVED LINK 11/11B
MESSAGE

M.6D
M.86D

ALL POSSIBLE LINK 16 MESSAGES
THAT MAY BE REQUIRED

J14.2

APPENDIX C

TABLE C.5.1-M.6D. M.6D or M.6D/M.86D to Link 16 Message Translation Tree
(Sheet 5 of 5)

FORWARDING TRANSMIT REQUIREMENTS

1. The J14.2 message with other than $R/C = 1$ shall be redundantly forwarded until a Machine Receipt, or other appropriate reply, is received or until redundancy requirements are met. When redundancy requirements are met and a reply has been received for an Original ($R/C = 0$) EW Coordination and Control message, the FJU shall reply on Link 11 with an automatic CANTCO ($R/C = 3$).
2. The J14.2 message with $R/C = 1$ shall be forwarded three times on Link 16. The redundant M.6D($R/C=1$) messages received will be discarded.

DATA RETENTION RULES

There are no Data Retention Rules associated with this message translation.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.1-M.9A. M.9A to Link 16 Message Translation Tree (Sheet 1 of 8)

C-303

MIL-STD-6016B
APPENDIX C

TEST NODE DIAGRAM		TEST NODE CONDITION	NOTES
<pre>graph TD 1[1] -- N --> 2[2] 1 -- Y --> 4[4] 2 -- N --> 3[3] 2 -- Y --> 6[6] 3 -- N --> 7[7] 3 -- Y --> 5[5] 4 -- N --> 5 4 -- Y --> 9[9] 5 -- N --> 7 5 -- Y --> 9 6 -- N --> 9 6 -- Y --> 9 7 -- N --> 8[8] 7 -- Y --> 9 8 -- N --> 9 8 -- Y --> 9 9 -- N --> 9 9 -- Y --> 9</pre>		1. ACTION = 4. 2. ACTION = 5. 3. ACTION = 7. 4. TRACK NUMBER IS ACTIVE UNIT. 5. PU/RU SOURCE IS CURRENT R2 UNIT. 6. FOLLOWED BY M.9A(AC=0, AI=0). 7. ACTION = 0. 8. ACKNOWLEDGE INDICATOR = 0. 9. FOLLOWED BY TRACK REPORT.	1
		REQUIRED ACTION	
A A C C C B D D D E F F G G G H I Z Z Z Z Z Z Z Z Z		A. DISCARD MESSAGE. B. DO NOT FORWARD MESSAGE. C. SET INDICATOR TO PROCESS TRACK REPORT THAT FOLLOWS. D. FWD APPROPRIATE ALERT INDICATION IN TRACK REPORT. E. DECLARE UNIT INACTIVE IN FJU DATABASE. F. FWD J7.0 (ACT=0). G. GO TO TEST NODE 10. H. GO TO TEST NODE 11. I. GO TO TEST NODE 12. Z. END TRANSLATION.	2

TABLE C.5.1-M.9A. M.9A to Link 16 Message Translation Tree (Sheet 2 of 8)

C-304

TEST NODE DIAGRAM	TEST NODE CONDITION	NOTES
	10. STATUS INDICATOR = 0. 11. PU/RU SOURCE AND/OR SPI CHANGED. 12. ACTION = 6. 13. ACTION = 1 AND CATEGORY/PLATFORM = 1-2. 14. CONFLICT INDICATOR = 0. 15. CONFLICT INDICATOR CHANGED. 16. ACTION = 2 AND CATEGORY/PLATFORM = 1-2. 17. ACTION = 3.	5, 6
	REQUIRED ACTION	
J N K N N O P Q R S T Z Z Z Z Z Z Z Z Z Z U	J. FWD J7.0 (ACT = 3). K. FWD J7.0 (ACT = 4). N. RETAIN DATA IN FJU DATABASE. O. FWD J10.5. P. FWD TRACK REPORT WITH ID DIFF IND = 0. Q. FWD J7.0 (ACT = 1). R. FWD TRACK REPORT WITH ID DIFF IND = 1. S. FWD J7.0 (ACT = 2). T. GO TO TEST NODE 21. U. GO TO TEST NODE 18. Z. END TRANSLATION.	4

C-305

APPENDIX C

APPENDIX C

TABLE C.5.1-M.9A. M.9A to Link 16 Message Translation Tree (Sheet 4 of 8)

NOTES

1. The following messages or message sequences constitute valid track reports which follow the M.9A(AC=0) message. When the amplifying message as specified below is not received, the M.9A(AC=0) message shall be discarded.

- o M.2 (valid only on Link 11)
- o M.2/M.82
- o M.3 (valid only on Link 11)
- o M.3/M.83
- o M.4A
- o M.4A/M.84A
- o M.4C/M.84C
- o M.4D/M.84D
- o M.5
- o M.5/M.85
- o M.6A
- o M.6B/M.86B
- o M.9F/M.89F

The following messages or message sequences constitute valid track reports which follow the M.9A(AC=5) message. When the amplifying message as specified below is not received, the M.9A(AC=5) message shall be discarded. The M.9A (AC=5, STI=0) Emergency Alert shall also be discarded whenever an M.5, M.4A or M.4C translates to a J3.0 Reference Point message (i.e., M.5 Point Type = 2,4,5,6,8,9 or 10, M.4A Data Report Type = 3, or M.4C Switch = 2 or 3). The M.9A (AC=5) Alert shall also be discarded whenever an M.5 translates to a J3.1 Emergency Point message (i.e., M.5 Point Type = 7).

- o M.2/M.82
- o M.3/M.83
- o M.4A
- o M.4A/M.84A
- o M.4C/M.84C

APPENDIX C

TABLE C.5.1-M.9A. M.9A to Link 16 Message Translation Tree (Sheet 5 of 8)

NOTES (Continued)

- o M.4D/M.84D
 - o M.5
 - o M.6A
 - o M.6B/M.86B
 - o M.9A(AC=0, SI=1)
2. Refer to the specific Link 11/11B message to Link 16 message translation tree to determine the appropriate J series message to be forwarded.
3. When the addressed unit is the FJU, it shall, when appropriate, respond with M.5(PT=13) messages in an initial report sequence for all active interface units for which data are being forwarded.
4. The source, SPI, and Simulation Indicator data in the M.9A(AC=0) message from Link 11B and the track alert status data in the M.9A(AC=5 or 7) message must be retained in the FJU database for utilization in track reports. The controlling unit address in the M.9A(AC=6) message must also be retained for identity difference and change data order processing.
5. Receipt of a change to the M.9A(AC=1) CI value shall be retained in the FJU database for transmission of the appropriate J3.x message.
6. If the FJU is retaining ID data received in a previous M.9A(AC=1, CI=0) or J7.0(ACT = 1) message for the same TN, discard this message.

APPENDIX C

TABLE C.5.1-M.9A. M.9A to Link 16 Message Translation Tree (Sheet 6 of 8)

RELATED MESSAGES

RECEIVED LINK 11/11B
MESSAGE

M.9A

ALL POSSIBLE LINK 16 MESSAGES
THAT MAY BE REQUIRED

J7.0(ACT = 0, 1, 2, 3, or 4)
J7.1
J7.5
J10.5

APPENDIX C

TABLE C.5.1-M.9A. M.9A to Link 16 Message Translation Tree (Sheet 7 of 8)

FORWARDING TRANSMIT REQUIREMENTS

1. A single J7.0 message shall be forwarded for the first M.9A(AC=1, CI=0) or M.9A(AC=7) message received. The FJU shall discard all identical messages received within 30 seconds after the initial message is received and forwarded.
2. A single J7.0 message shall be forwarded for each M.9A(AC=2) message received.
3. A single J7.1 message shall be forwarded for each M.9A(AC=3) message received.
4. A single J7.0 message shall be forwarded on the Surveillance NPG for each M.9A(AC=4) message received. If the TN in the M.9A(AC=4) message is being reported in M.6 or M.9F (Source = 1) messages, the J7.0 message may be transmitted on both the Surveillance and EW NPGs. The FJU shall discard all identical messages received within 30 seconds after the initial message is received and forwarded.
5. A single J7.0 message shall be forwarded for the first M.9A(AC=5) message received from a nonR² unit. When the first M.9A(AC=5) message is received from the R² unit, the appropriate alert indication in the Link 16 series message will be set. This alert indication will be retained until terminated by any unit. The FJU shall discard all identical messages received within 30 seconds after the initial message is received and forwarded.
6. A single J10.5 message shall be forwarded for each M.9A(AC=6) message received. The M.9A(AC=6) message identity data will not be used when forwarding surveillance data.
7. A single J7.5 message shall be forwarded for the first M.9A(AC=9) message received. The FJU shall discard all identical messages received within 30 seconds after the initial message is received and forwarded.

APPENDIX C

TABLE C.5.1-M.9A. M.9A to Link 16 Message Translation Tree (Sheet 8 of 8)

DATA RETENTION RULES

1. The SPI, Simulation Indicator, and Source data from the Link 11B M.9A(AC=0) message shall be retained in the FJU database for utilization in track reports.
2. The FJU shall retain the latest reported status of the Emergency and Force Tell Indicators for all tracks being forwarded.
3. The current controlling unit address received in an M.9A(AC=6, STI=0) shall be retained in the FJU database until control is terminated.
4. The FJU shall retain and update IFF/SIF information received in an M.9A(AC=9, ISAC=0) IFF/SIF Clear message received from any source.
5. The FJU shall retain ID data received in an M.9A(AC=1, CI=0) message from a nonR² unit for the track until the conflict has been resolved by the R² unit or an R² shift occurs.

TABLE C.5.1-M.9B. M.9B to Link 16 Message Translation Tree (Sheet 1 of 3)

TEST NODE DIAGRAM	TEST NODE CONDITION	NOTES
<pre>graph TD 1[1] -- Y --> 2[2] 1 -- N --> A[A] 2 -- Y --> 3[3] 2 -- N --> A 3 -- Y --> 4[4] 3 -- N --> A 4 -- Y --> B[B] 4 -- N --> A</pre>	1. ACTION = 0-5. 2. ACTION = 6. 3. ACTION = 15. 4. ACTION = 7 AND NEITHER TN-1 NOR TN-2 EQUAL 0000, 0077, 0176, 0177, 7777 (OCTAL).	
	REQUIRED ACTION	
B C Z B C Z D Z A Z	A. DISCARD MESSAGE. B. FWD J10.6. C. FWD J7.7. D. FWD J7.2. Z. END TRANSLATION.	

C-311

MIL-STD-6016B

APPENDIX C

TABLE C.5.1-M.9B. M.9B to Link 16 Message Translation Tree (Sheet 2 of 3)

RELATED MESSAGES

RECEIVED LINK 11/11B
MESSAGE

M.9B

ALL POSSIBLE LINK 16 MESSAGES
THAT MAY BE REQUIRED

J7.2

J7.7

J10.6

APPENDIX C

TABLE C.5.1-M.9B. M.9B to Link 16 Message Translation Tree (Sheet 3 of 3)

FORWARDING TRANSMIT REQUIREMENTS

1. A single J7.2, J7.7 or J10.6 message shall be transmitted for each M.9B(AC=0-7) message received.
2. A single J7.7 and J10.6 message shall be forwarded for each M.9B(AC=15) message received.

DATA RETENTION RULES


There are no Data Retention Rules associated with this message translation.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.1-M.9C. M.9C to Link 16 Message Translation Tree (Sheet 1 of 3)

TEST NODE DIAGRAM		TEST NODE CONDITION	NOTES
 <pre>graph TD 1[1] --- Y((Y)) Y --- N((N)) Y --- A[A] A --- B[B] B --- Z1[Z] A --- Z2[Z]</pre>		1. ADDRESSEE IS AN ACTIVE LINK 16 UNIT FOR WHOM DATA ARE BEING FORWARDED BY THIS FJU.	
		REQUIRED ACTION	
A B Z		A. DISCARD MESSAGE. B. FWD J7.3 TO ADDRESSEE. Z. END TRANSLATION.	

APPENDIX C

TABLE C.5.1-M.9C. M.9C to Link 16 Message Translation Tree (Sheet 2 of 3)

RELATED MESSAGES

RECEIVED LINK 11/11B
MESSAGE

M.9C

ALL POSSIBLE LINK 16 MESSAGES
THAT MAY BE REQUIRED

J7.3

APPENDIX C

TABLE C.5.1-M.9C. M.9C to Link 16 Message Translation Tree (Sheet 3 of 3)

FORWARDING TRANSMIT REQUIREMENTS

A single J7.3 message shall be transmitted for each M.9C message received.

DATA RETENTION RULES

There are no Data Retention Rules associated with this message translation.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.1-M.9E. M.9E to Link 16 Message Translation Tree (Sheet 1 of 4)

C-319

TEST NODE DIAGRAM	TEST NODE CONDITION	NOTES
<pre>graph TD 1[1] -- Y --> 2[2] 1 -- N --> 3[3] 2 -- Y --> 3 2 -- N --> 4[4] 3 -- Y --> 4 3 -- N --> 5[5] 4 -- Y --> 5 4 -- N --> 6[6] 5 -- Y --> 7[7] 5 -- N --> 8[8] 6 -- Y --> 7 6 -- N --> 9[9] 7 -- Y --> 8 7 -- N --> 9 8 -- Y --> 9 8 -- N --> 9 9 -- Y --> 9 9 -- N --> 9</pre>	1. ACTION = 6 or 7. 2. ACTION = 5 AND SWITCH = 0. 3. ACTION = 3 AND SWITCH = 0. 4. ACTION = 1 AND NONE OF THE FOUR VOICE CALL COMPONENT CODES = 36-62. 5. TRACK NUMBER IS A POINT. 6. ACTION = 0. 7. M.9E IS PART OF HANDOVER SEQUENCE FOLLOWING A M.10A R/C = 0. 8. M.9E ORIGINATED BY UNIT CURRENTLY REPORTING CONTROL OF TRACK. 9. M.9E IS PART OF A SEQUENCE FOLLOWING A M.10A R/C=3.	1
	REQUIRED ACTION	
A B B A C A C A C A	A. DO NOT FORWARD MESSAGE. B. FWD J7.4. C. INCLUDE RELATED DATA IN FORWARDED J9.0 OR J10.3. D. INCLUDE RELATED DATA IN THE NEXT FORWARDED J10.5 FROM THE SAME SOURCE. Z. END TRANSLATION.	1
Z Z Z Z Z Z Z Z Z Z Z		

APPENDIX C

TABLE C.5.1-M.9E. M.9E to Link 16 Message Translation Tree (Sheet 2 of 4)

NOTES

1. A voice call sign is sent on Link 11/11B only for Special Points and for controlled aircraft. An M.9E message with Voice Call Sign for a controlled aircraft is sent with a handover sequence or at variable rates depending upon circumstances. In the latter case, specific message sequences will not always be true. Therefore, the M.9E message data relating a Voice Call Sign which is not part of a handover sequence shall be included as a part of the next Controlling Unit Report forwarded from the same data source.

MIL-STD-6016B

APPENDIX C

TABLE C.5.1-M.9E. M.9E to Link 16 Message Translation Tree (Sheet 3 of 4)

RELATED MESSAGES

RECEIVED LINK 11/11B
MESSAGE

M.9E

ALL POSSIBLE LINK 16 MESSAGES
THAT MAY BE REQUIRED

J7.4
J9.0
J10.3
J10.5

APPENDIX C

TABLE C.5.1-M.9E. M.9E to Link 16 Message Translation Tree (Sheet 4 of 4)

FORWARDING TRANSMIT REQUIREMENTS

1. A single J7.4 message shall be forwarded for each M.9E(AC=3 or 5) message received.
2. Only the specific M.9E message data that are received as a part of a handover sequence shall be forwarded in the related J9.0 or J10.3 message. If redundant transmission of the forwarded J9.0 or J10.3 message is required due to no machine receipt, the M.9E message data will be repeated. Forwarding a WILCO reply shall include only the M.9E message data that are reported as a part of the sequence following the M.10A (R/C=3) message.
3. An M.9E message reporting Voice Call Sign of a controlled aircraft which is not preceded by an M.10A message in the same transmit opportunity shall be forwarded as a part of the next Controlling Unit Report from the same source.
4. The voice call sign data contained in the M.9E message shall continue to be redundantly reported by the FJU with each J10.5 message forwarded until it is changed.

DATA RETENTION RULES

The FJU shall retain the latest reported Voice Call Sign.

TABLE C.5.1-M.9F-1. M.9F(0)/M.89F(0) to Link 16 Message Translation Tree (Sheet 1 of 4)

TEST NODE DIAGRAM					TEST NODE CONDITION	NOTES
<pre>graph TD 1[1] -- Y --> 2[2] 1 -- N --> 4[4] 2 -- Y --> 3[3] 2 -- N --> 4 3 -- Y --> 4 3 -- N --> 4 4 -- Y --> 4 4 -- N --> 4</pre>					1. M.9F IMMEDIATELY FOLLOWED BY M.89F. 2. SOURCE = 1. 3. SOURCE = 2. 4. CATEGORY/PLATFORM = 3.	
					REQUIRED ACTION	
B	B		A	A	A. DISCARD MESSAGE.	1
C					B. FWD J3.7I/J3.7C1/J3.7C2.	1
		D			C. FWD J14.0I/J14.0C2.	
Z	Z	Z	Z	Z	D. FWD J3.0I/J3.0E0/J3.0C2.	
					Z. END TRANSLATION.	

APPENDIX C

TABLE C.5.1-M.9F-1. M.9F(0)/M.89F(0) to Link 16 Message Translation Tree
(Sheet 2 of 4)

NOTES

1. The FJU shall check to determine if the M.9F(AC=0)/M.89F(AC=0) message is immediately followed by an M.9F(AC=1) for the specified track number. This check will terminate after three Link 11/11B message frame times. If the M.9F(AC=1) message is received immediately after the M.89F(AC=0), the J3.7C3 or J14.0C1, as appropriate, shall also be included in this word sequence.

MIL-STD-6016B

APPENDIX C

TABLE C.5.1-M.9F-1. M.9F(0)/M.89F(0) to Link 16 Message Translation Tree
(Sheet 3 of 4)

RELATED MESSAGES

RECEIVED LINK 11/11B
MESSAGE

M.9F(0)

M.89F(0)

ALL POSSIBLE LINK 16 MESSAGES
THAT MAY BE REQUIRED

J3.0

J3.7

J14.0

APPENDIX C

TABLE C.5.1-M.9F-1. M.9F(0)/M.89F(0) to Link 16 Message Translation Tree
(Sheet 4 of 4)

FORWARDING TRANSMIT REQUIREMENTS

One J3.7 message and one J14.0 message or one J3.0 message, as appropriate, shall be transmitted for each M.9F(AC=0)/M.89F(AC=0) message received.

DATA RETENTION RULES

There are no Data Retention Rules associated with this message translation.

C-327

APPENDIX C

MIL-STD-6016B

APPENDIX C

TABLE C.5.1-M.9F-2. M.9F(1) to Link 16 Message Translation Tree (Sheet 2 of 4)

NOTES

1. When an M.9F(AC=1) is received with Switch = 1 for the first time, the FJU shall transmit a J7.7 message with Track Number, Subject = M.9F Track Number and Track Number, Associated = M.9F Related Track Number. The PU/RU that originated the M.9F(AC=1) shall be reported as TN, Source of the J7.7 message.
2. When an M.9F(AC=1) is received with Switch = 1 and Related Track Number has changed from the previous report, the FJU shall transmit a J7.7 (ACT = 1) terminating the previous association, followed by a J7.7 (ACT = 0) with Track Number, Subject = M.9F Track Number and Track Number, Associated = the new M.9F Related Track Number.
3. If an M.9F(AC=0)/M.89F(AC=0) message sequence was received immediately preceding the M.9F(AC=1), the J3.7C3 and J14.0C1 words shall be included in the J3.7 and J14.0 messages resulting from the M.9F(AC=0)/M.89F(AC=0). Otherwise, J3.7I/J3.7C3 and J14.0I/J14.0C1 word sequences shall be forwarded.
4. If an M.9F(AC=0)/M.89F(AC=0) message sequence was received immediately preceding the M.9F(AC=1) message, Related Track Number or X Dot and Y Dot shall be translated to TN, Related or Course and Speed in the J3.0 message resulting from the M.9F(AC=0)/M.89F(AC=0). Otherwise, a J3.0I/J3.0E0/J3.0C2 word sequence shall be forwarded.

APPENDIX C

TABLE C.5.1-M.9F-2. M.9F(1) to Link 16 Message Translation Tree (Sheet 3 of 4)

RELATED MESSAGES

RECEIVED LINK 11/11B
MESSAGE

M.9F(1)

ALL POSSIBLE LINK 16 MESSAGES
THAT MAY BE REQUIRED

J3.0
J3.7
J7.7
J14.0

APPENDIX C

TABLE C.5.1-M.9F-2. M.9F(1) to Link 16 Message Translation Tree (Sheet 4 of 4)

FORWARDING TRANSMIT REQUIREMENTS

1. One J3.7 message and one J14.0 message or one J3.0 message, as appropriate, shall be transmitted for each M.9F(AC=1) message received.
2. One J7.7 (ACT = 0) and one J7.7 (ACT = 1) message, as appropriate, shall be transmitted for each M.9F(AC=1) message received.

DATA RETENTION RULES

There are no Data Retention Rules associated with this message translation.

TABLE C.5.1-M.10A. M.10A to Link 16 Message Translation Tree (Sheet 1 of 4)

C-331

MIL-STD-6016B
APPENDIX C

TEST NODE DIAGRAM		TEST NODE CONDITION	NOTES
<pre>graph TD 1[1] -- N --> 4_1[4] 1 -- Y --> 2[2] 2 -- N --> 3[3] 2 -- Y --> 4_2[4] 3 -- N --> 4_1 3 -- Y --> 5_1[5] 4_1 -- N --> 5_1 4_1 -- Y --> 6_1[6] 5_1 -- N --> 6_1 5_1 -- Y --> 7_1[7] 6_1 -- N --> 7_1 6_1 -- Y --> 8_1[8] 7_1 -- N --> 8_1 7_1 -- Y --> 9_1[9] 8_1 -- N --> 9_1 8_1 -- Y --> 9_1 9_1 -- N --> 9_1 9_1 -- Y --> 9_1</pre>		1. ADDRESSEE IS A UNIT TO WHOM DATA ARE BEING FORWARDED BY THIS FJU; ORDER = 0-6; AND R/C=0, 2-4, OR 6-7. 2. R/C = 2. 3. R/C = 0. 4. ADDRESSEE IS CURRENTLY INACTIVE. 5. ORDER = 0, 1, OR 6. 6. ORDER = 0 OR 1 AND R/C = 3 OR 4. 7. M.10A IS FOLLOWED BY ONE OR MORE M.9E (AC=0, 1, 2, OR 4) MESSAGE(S). 8. ORDER = 6 AND M.9E (AC=2 OR 4). 9. M.10A IS FOLLOWED BY M.9E (AC=1 OR 2).	1 2, 3 3 3
		REQUIRED ACTION	
B B C C D D D D D D E E E E E E F F F F F F G G G G G G H H H H H H Z Z Z Z Z Z Z Z Z Z Z Z		A. DISCARD MESSAGE. B. DO NOT FORWARD MESSAGE. C. SET INDICATOR TO TRANSMIT M.10A CANTPRO WITH CANTPRO AMP = 5. D. FWD J10.3. E. SET INDICATOR TO INCLUDE J10.3C1 IN SEQUENCE. F. FWD J9.0. G. SET INDICATOR TO INCLUDE J9.0C1 IN SEQUENCE. H. SET INDICATOR TO INCLUDE J10.3E0 IN SEQUENCE. Z. END TRANSLATION.	1

APPENDIX C

TABLE C.5.1-M.10A. M.10A to Link 16 Message Translation Tree (Sheet 2 of 4)

NOTES

1. The FJU responds to each M.10A message, which is not discarded, with an M.10A CANTPRO message or an M.10A Machine Receipt (MR) message. The FJU shall originate an M.10A CANTPRO Response message only in response to an M.10A Original (R/C = 0) Handover message and then only in those cases shown in this table. The FJU shall respond with an M.10A MR message for those M.10A messages that are accepted for forwarding. The FJU then forwards a J9.0 message or a J10.3 message as appropriate on Link 16. If the FJU fails to receive a Link 16 MR or other reply, the data are forwarded a second time. If after two attempts a Link 16 MR or other reply is not received, the FJU shall send an M.10A CANTPRO message with CANTPRO AMP = 6 addressed to the originator of the M.10A Original (R/C = 0) message. If a Link 16 MR is not received for an M.10A, WILCO, CANTCO or CANTPRO reply message forwarded to Link 16, after two attempts to forward, the FJU takes no further action. If a reply is received from the addressee prior to the transmission of an M.10A MR message originated by the FJU, that reply may be transmitted instead of the FJU's M.10A MR message.

2. The FJU shall check to determine if the next message received from the PU/RU Source is for the specified track number. This check will terminate after three Link 11/11B message frame times.

3. The M.10A(Order=0 or 1, R/C=0) can only be followed by M.9E(AC=0 and/or 1). The M.10A(Order=0 or 1, R/C=3) can only be followed by M.9E(AC=2 and/or 4).

The M.10A(Order=6, R/C=0) can be followed by M.9E(AC=0, 1, 2, and/or 4). The M.10A(Order=6, R/C=3) cannot be followed by M.9E(AC=2 and/or 4).

The M.9E(AC=6) may be included following the M.10A, but is not forwarded.

APPENDIX C

TABLE C.5.1-M.10A. M.10A to Link 16 Message Translation Tree (Sheet 3 of 4)

RELATED MESSAGES

RECEIVED LINK 11/11B
MESSAGE

M.10A

ALL POSSIBLE LINK 16 MESSAGES
THAT MAY BE REQUIRED

J9.0

J10.3

APPENDIX C

TABLE C.5.1-M.10A. M.10A to Link 16 Message Translation Tree (Sheet 4 of 4)

FORWARDING TRANSMIT REQUIREMENTS

The J9.0 message or the J10.3 message shall be redundantly forwarded until a Machine Receipt, or other appropriate reply, is received or until redundancy requirements are met. When redundancy requirements are met and a reply has not been received for an Original (R/C = 0) Handover message, the FJU shall reply on Link 11/11B with a CANTPRO (R/C = 7) and CANTPRO AMP equal to 6.

DATA RETENTION RULES

There are no Data Retention Rules associated with this message translation.

C-335

MIL-STD-6016B
APPENDIX C

APPENDIX C

TABLE C.5.1-M.11B. M.11B to Link 16 Message Translation Tree (Sheet 2 of 4)

NOTES

1. It is possible to receive sequential M.11B messages having different Fuel/Time Switch values in the same transmission opportunity. The FJU shall check the next message received to determine if it is another M.11B from the same PU/RU source for the same TN. The FJU accumulates the separate M.11B messages for transmission in a single J13.2 message. This check will terminate after three Link 11/11B message frame times if no other messages are received.

APPENDIX C

TABLE C.5.1-M.11B. M.11B to Link 16 Message Translation Tree (Sheet 3 of 4)

RELATED MESSAGES

RECEIVED LINK 11/11B
MESSAGE

M.11B

ALL POSSIBLE LINK 16 MESSAGES
THAT MAY BE REQUIRED

J13.2

APPENDIX C

TABLE C.5.1-M.11B. M.11B to Link 16 Message Translation Tree (Sheet 4 of 4)

FORWARDING TRANSMIT REQUIREMENTS

A single J13.2 message shall be transmitted for each M.11B message or series of messages received.

DATA RETENTION RULES

There are no Data Retention Rules associated with this message translation.

TABLE C.5.1-M.11C. M.11C to Link 16 Message Translation Tree (Sheet 1 of 4)

TEST NODE DIAGRAM		TEST NODE CONDITION	NOTES
<pre>graph TD 1[1] -- Y --> Y1[] 1 -- N --> N1[] Y1 --> 2[2] 2 -- Y --> Y2[] 2 -- N --> N2[] Y2 --> Bottom[] N1 --> Bottom N2 --> Bottom style Y1 fill:none,stroke:none style N1 fill:none,stroke:none style Y2 fill:none,stroke:none style Bottom fill:none,stroke:none</pre>		1. AIRCRAFT TYPE IS RECEIVED WITH VALUE 2-4, 6, 7, 11, OR 12 SET. 2. RECEIVED M.11C IS IMMEDIATELY FOLLOWED BY ANOTHER M.11C FOR SAME TN FROM SAME SOURCE.	1
		REQUIRED ACTION	
A	A	A. FWD J13.2 INCLUDING J13.2C3 WORD.	
B		B. SET INDICATOR TO INCLUDE J13.2C1 WORD.	
C	C	C. GO TO NEXT TEST NODE.	
	D	D. GO TO TEST NODE 1.	
	Z	Z. END TRANSLATION.	

C-339

APPENDIX C

TABLE C.5.1-M.11C. M.11C to Link 16 Message Translation Tree (Sheet 2 of 4)

NOTES

1. It is possible to receive sequential M.11C messages having different B-Frames in the same transmission opportunity. The FJU shall check the next message received to determine if it is another M.11C from the same PU/RU source for the same TN. The FJU accumulates the separate M.11C messages for transmission in a single J13.2 message. This check will terminate after three Link 11 message frame times if no other messages are received.

APPENDIX C

TABLE C.5.1-M.11C. M.11C to Link 16 Message Translation Tree (Sheet 3 of 4)

RELATED MESSAGES

RECEIVED LINK 11/11B
MESSAGE

M.11C

ALL POSSIBLE LINK 16 MESSAGES
THAT MAY BE REQUIRED

J13.2

APPENDIX C

TABLE C.5.1-M.11C. M.11C to Link 16 Message Translation Tree (Sheet 4 of 4)

FORWARDING TRANSMIT REQUIREMENTS

A single J13.2 message shall be transmitted for each M.11C message or series of messages received.

DATA RETENTION RULES

There are no Data Retention Rules associated with this message translation.

TABLE C.5.1-M.11D. M.11D to Link 16 Message Translation Tree (Sheet 1 of 3)

TEST NODE DIAGRAM		TEST NODE CONDITION	NOTES
<pre>graph TD 1[1] -- Y --> 2[2] 1 -- N --> 3[3] 2 -- Y --> 3 2 -- N --> 4[] 3 -- Y --> 5[] 3 -- N --> 6[] 4 --> 7[] 5 --> 7 6 --> 7 style 4 fill:none,stroke:none style 7 fill:none,stroke:none</pre>		1. TYPE REPORT = 1. 2. PU/RU SOURCE IS CURRENT R2 FOR TN. 3. NONZERO IFF/SIF DATA IS REPORTED.	
		REQUIRED ACTION	
B C Z Z Z Z		A. DISCARD MESSAGE. B. FWD J7.5 (ACT = 3). C. SET INDICATOR TO INCLUDE IFF/SIF DATA IN NEXT J2.0C1 OR J3.XC1 MESSAGE REPORT. Z. END TRANSLATION.	

MIL-STD-6016B

APPENDIX C

TABLE C.5.1-M.11D. M.11D to Link 16 Message Translation Tree (Sheet 2 of 3)

RELATED MESSAGES

RECEIVED LINK 11/11B
MESSAGE

M.11D

ALL POSSIBLE LINK 16 MESSAGES
THAT MAY BE REQUIRED

J7.5(ACT = 3)
J2.0C1
J3.0C1
J3.1C1
J3.2C1
J3.3C1
J3.4C1
J3.5C1
J3.6C1
J3.7C1

APPENDIX C

TABLE C.5.1-M.11D. M.11D to Link 16 Message Translation Tree (Sheet 3 of 3)

FORWARDING TRANSMIT REQUIREMENTS

A single J7.5 (ACT = 3) shall be forwarded for the first M.11D(TR=1) message received. The FJU shall discard all identical messages received within 30 seconds after the first message is received and forwarded.

DATA RETENTION RULES


The FJU shall retain and update IFF/SIF information received in an M.11D(TR=0) message from the R² unit.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.1-M.11M. M.11M/M.811M to Link 16 Message Translation Tree (Sheet 1 of 4)

TEST NODE DIAGRAM		TEST NODE CONDITION	NOTES
		1. M.11M CATEGORY = 6.	1
		REQUIRED ACTION	
A Z B Z		A. DISCARD MESSAGE. B. FWD J6.0. Z. END TRANSLATION.	

APPENDIX C

TABLE C.5.1-M.11M. M.11M/M.811M to Link 16 Message Translation Tree (Sheet
2 of 4)

NOTES

1. Upon receipt of a valid M.11M message or M.11M/M.811M message sequence, the FJU shall forward an appropriate J6.0 message. The FJU shall check to determine if the M.11M is followed by an M.811M. This check will terminate after three Link 11/11B message frame times.

APPENDIX C

TABLE C.5.1-M.11M. M.11M/M.811M to Link 16 Message Translation Tree (Sheet
3 of 4)

RELATED MESSAGES

RECEIVED LINK 11/11B
MESSAGE

M.11M/M.811M

ALL POSSIBLE LINK 16 MESSAGES
THAT MAY BE REQUIRED

J6.0

APPENDIX C

TABLE C.5.1-M.11M. M.11M/M.811M to Link 16 Message Translation Tree (Sheet
4 of 4)

FORWARDING TRANSMIT REQUIREMENTS

1. A single J6.0 message shall be forwarded for the first M.11M/M.811M message sequence received, unless Current Activity values 1 through 10 are reported. The redundant M.11M/M.811M message sequences shall be discarded.
2. When the M.11M/M.811M message sequence reports Current Activity values 1 through 10, the J6.0 message shall be forwarded three times, except that a change in the Current Activity shall interrupt the redundant transmission of the message containing the previous Current Activity. The redundant M.11M/M.811M message sequences shall be discarded.

DATA RETENTION RULES

There are no Data Retention Rules associated with this message translation.

TABLE C.5.1-M.14. M.14 to Link 16 Message Translation Tree (Sheet 1 of 4)

TEST NODE DIAGRAM		TEST NODE CONDITION	NOTES
<pre>graph TD 1[1] -- Y --> 2[2] 1 -- N --> 3[3] 2 -- Y --> 3 2 -- N --> 4[4] 3 -- Y --> 4 3 -- N --> 5[5] 4 -- Y --> 5 4 -- N --> 6[6] 5 -- Y --> 6 5 -- N --> 7[7]</pre>		1. W/ES = 0, 1, OR 12. 2. W/ES = 2, 5, 6, 8, OR 10 AND WEAPON TYPE = 0-10. 3. W/ES = 3 AND WEAPON TYPE = 0-2, 4, 6-8, OR 10. 4. W/ES = 4 OR 7 AND WEAPON TYPE = 1-10. 5. W/ES =9 AND WEAPON TYPE = 0.	1
		REQUIRED ACTION	
A B Z C C C C Z Z Z Z Z Z Z		A. DISCARD MESSAGE. B. FWD J13.2, J13.3, J13.4, OR J13.5 MESSAGE. C. FWD J10.2 MESSAGE. Z. END TRANSLATION.	

C-351

APPENDIX C

TABLE C.5.1-M.14. M.14 to Link 16 Message Translation Tree (Sheet 2 of 4)

NOTES

1. The Environment/Category of the M.14 TN Friendly Weapon System will determine whether the J13.2 Air, J13.3 Surface (Maritime), J13.4 Subsurface (Maritime), or J13.5 Land (Ground) Platform and System Status message will be forwarded. If the Environment/Category of the M.14 TN Friendly Weapon System cannot be determined, a J13 Series message shall not be forwarded.

APPENDIX C

TABLE C.5.1-M.14. M.14 to Link 16 Message Translation Tree (Sheet 3 of 4)

RELATED MESSAGES

RECEIVED LINK 11/11B
MESSAGE

M.14

ALL POSSIBLE LINK 16 MESSAGES
THAT MAY BE REQUIRED

J10.2

J13.2

J13.3

J13.4

J13.5

APPENDIX C

TABLE C.5.1-M.14. M.14 to Link 16 Message Translation Tree (Sheet 4 of 4)

FORWARDING TRANSMIT REQUIREMENTS

1. Each Engagement Status message will be forwarded in the appropriate J10.2 message or J13 series message when received, unless W/ES = 5, 8, or 9.
2. When W/ES = 5, 8, or 9, the first Engagement Status message received will be forwarded in the appropriate J10.2 message in two consecutive transmit opportunities. The FJU shall discard redundant M.14 W/ES = 5, 8, or 9 messages received.

DATA RETENTION RULES

There are no Data Retention Rules associated with this message translation.

TABLE C.5.1-M.15. M.15 to Link 16 Message Translation Tree (Sheet 1 of 4)

TEST NODE DIAGRAM	TEST NODE CONDITION	NOTES
<pre>graph TD 1[1] -- N --> 7[7] 1 -- Y --> 2[2] 2 -- N --> 3[3] 2 -- Y --> 4[4] 3 -- N --> 7 3 -- Y --> 4 4 -- N --> 5[5] 4 -- Y --> 6[6] 5 -- N --> 7 5 -- Y --> 6 6 -- N --> 7 6 -- Y --> 8[8] 7 -- N --> 8 7 -- Y --> 8 8 -- N --> 7 8 -- Y --> 8</pre>	1. ADDRESSEE IS A UNIT TO WHOM DATA ARE BEING FORWARDED BY THIS FJU, OR COMMAND = 0-8, OR 12-20; AND R/C = 0-4, OR 6-7. 2. R/C = 2. 3. ADDRESSEE IS ACTIVE OR TN, ADDRESSEE = 177 (OCTAL). 4. COMMAND = 12 OR 13 AND TN WEAPON SYSTEM/ TN-1/ORIGINATOR = 16-4095. 5. COMMAND = 16 OR 17 AND TN WEAPON SYSTEM/ TN-1/ORIGINATOR = 27-4095. 6. COMMAND = 18 OR 19 AND TN WEAPON SYSTEM/ TN-1/ORIGINATOR = 41-4095. 7. COMMAND = 0-8. 8. R/C = 0.	1, 2 3
REQUIRED ACTION		
B A A A C C B B A Z Z Z Z Z Z Z Z Z		A. DISCARD MESSAGE. B. DO NOT FORWARD MESSAGE. C. FWD J9.0. D. SET INDICATOR TO TRANSMIT M.15 CANTPRO. Z. END TRANSLATION.

C-355

APPENDIX C

TABLE C.5.1-M.15. M.15 to Link 16 Message Translation Tree (Sheet 2 of 4)

NOTES

1. The collective address of 177 (octal) is included as one for which data are being forwarded. The FJU may forward M.15 Command messages to a link other than the one on which the addressee is active. In this case, R/C procedures do not apply. (See paragraph C.4.8.4)
2. The FJU shall discard all identical M.15 Command (Addressee = 177 (octal)) messages received within 90 seconds after the initial message is received and forwarded.
3. If the addressee is not active the FJU may forward J9.0 Command values 0-8 and transmit an M.15 CANTPRO back to the originator. If the FJU does not forward J9.0 Command values 0-8, the message shall be discarded and an M.15 CANTPRO shall be transmitted back to the originator. (See paragraph C.4.8.4)

APPENDIX C

TABLE C.5.1-M.15. M.15 to Link 16 Message Translation Tree (Sheet 3 of 4)

RELATED MESSAGES

RECEIVED LINK 11/11B
MESSAGE

M.15

ALL POSSIBLE LINK 16 MESSAGES
THAT MAY BE REQUIRED

J9.0

APPENDIX C

TABLE C.5.1-M.15. M.15 to Link 16 Message Translation Tree (Sheet 4 of 4)

FORWARDING TRANSMIT REQUIREMENTS

1. The J9.0 message with other than R/C = 1 shall be redundantly forwarded until a Machine Receipt, or other appropriate reply, is received or until redundancy requirements are met. When redundancy requirements are met and a reply has not been received for an Original (R/C = 0) Command message, the FJU shall reply on Link 11/11B with a CANTPRO (R/C = 7).
2. The J9.0 message with R/C = 1 shall be forwarded three times on Link 16. The redundant M.15(R/C=1) messages received will be discarded.

DATA RETENTION RULES

There are no Data Retention Rules associated with this message translation.

APPENDIX C

C.5.2 DATA ELEMENT TRANSLATION

C.5.2.1 GENERAL

This section provides the data element translations between Link 16 (J-Series) and Link 11/11B (M-Series) messages as required by the message translation process in section C.5.1. The data element translations depict actions required to generate a message for transmission on a data link based on information received on another data link. Information in this section is presented in tabular form according to the message being generated.

C.5.2.2 DETAILED DESCRIPTION OF CONTENTS

Messages that can be forwarded are depicted by data element translation tables. The J-Series data element translation tables are presented first, followed by the M-Series data element translation tables.

C.5.2.2.1 DATA ELEMENT TRANSLATION TABLES

These tables are a data element by a data element depiction of the message to be generated with an indication of the source of the data to be used in the data element.

C.5.2.2.1.1 LINK 16 DATA ELEMENT TRANSLATION TABLES

Data element translation tables for Link 16 are presented in the following format:

TABLE C.5.2-Jn.m. Jn.m Message Data Element Translation from Link 11/11B							
LINK 16			TRANSLATION		LINK 11/11B		
<u>WORD</u>	<u>DATA ELEMENT</u>	<u>VALUE</u>	<u>REQUIRED</u>	<u>MESSAGE</u>	<u>FIELD</u>	<u>VALUE</u>	<u>NOTES</u>

where;

LINK 16 WORD = The Link 16 word being generated.

APPENDIX C

LINK 16 DATA ELEMENT = List of all data elements contained in the Link 16 word being generated.

LINK 16 VALUE = Decimal value of the data element being generated unless otherwise noted.

TRANSLATION REQUIRED = An indication of the translation activity that is required to determine the correct value of the data element.

LINK 11/11B MESSAGE = Identifies the Link 11/11B message that contains the field corresponding to the data element.

LINK 11/11B FIELD = Identifies the field in the specified Link 11/11B message that corresponds to the data element.

LINK 11/11B VALUE = Decimal value of the field in the Link 11/11B message unless otherwise noted.

NOTES = Reference to amplifying information that must be taken into consideration to complete the data element translation process. A note number preceded by the letter "G" indicates a "General Note" that may be found in section C.5.3. A note number with no prefix indicates a note that is specifically stated within the translation table.

C.5.2.2.1.2 LINK 11/11B DATA ELEMENT TRANSLATION TABLES

Data element translation tables for Link 11/11B are presented in the following format:

TABLE C.5.2-M.x. M.x Message Data Element Translation from Link 16							
LINK 11/11B			LINK 16				
<u>MESSAGE</u>	<u>FIELD</u>	<u>VALUE</u>	<u>TRANSLATION REQUIRED</u>	<u>WORD</u>	<u>DATA ELEMENT</u>	<u>VALUE</u>	<u>NOTES</u>

where;

LINK 11/11B MESSAGE = The Link 11/11B message being generated.

APPENDIX C

LINK 11/11B FIELD = List of all fields contained in the Link 11/11B message being generated.

LINK 11/11B VALUE = Decimal value of the field being generated unless otherwise noted.

TRANSLATION REQUIRED = An indication of the translation activity that is required to determine the correct value of the field.

LINK 16 WORD = Identifies the Link 16 word that contains the data element corresponding to the field.

LINK 16 DATA ELEMENT = The data element in the identified Link 16 word that corresponds to the field.

LINK 16 VALUE = Decimal value of the data element in the Link 16 message unless otherwise noted.

NOTES = Reference to amplifying information that must be taken into consideration to complete the data element translation process. A note number preceded by the letter "G" indicates a "General Note" that may be found in section C.5.3. A note number with no prefix indicates a note that is specifically stated within the translation table.

C.5.2.2.2 DATA ELEMENT TRANSLATION TABLE ENTRIES

Within the translation tables the following entries are used:

AT = As translated.

NA = Not available in the other message series.

RX = All valid values as received.

CR = Conversion is required.

AR = As required by the formats and protocols of the link on which the message will be transmitted.

= = Data element and bit field equivalence.

APPENDIX C

C.5.2.3 DEFAULT CONDITIONS

When the message required for data element translation has not been received, the default condition will be No Statement if defined, or 0.

TABLE C.5.2-J.x. J-Series Message Data Element Translation from Link 11/11B

Link 16		Link 11/11B		
<u>WORD</u>	<u>DATA ELEMENT</u>	<u>TRANSLATION</u>		
		<u>VALUE</u>	<u>REQUIRED</u>	<u>MESSAGE</u>
		<u>FIELD</u>	<u>VALUE</u>	<u>NOTES</u>
There are no Link 11/11B messages that will stimulate the transmission of an J0 Series, J1 Series, J2.2, J2.3, J2.4, J2.5, J2.6, J3.6, J7.2, J7.6, J8.0, J8.1, J9.1, J12 Series, J13.0, J15.0, J17.0, J28 Series, J29 Series, J30 Series, J31 Series or RTT Series Message.				

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-J. HEADER Message Data Element Translation from Link 11/11B

Link 16		TRANSLATION			Link 11/11B		
<u>WORD</u> <u>HEADER</u>	<u>DATA ELEMENT</u> <u>TIME SLOT TYPE</u>	<u>VALUE</u> AR	<u>REQUIRED</u> None	<u>MESSAGE</u> NA	<u>FIELD</u> NA	<u>VALUE</u> NA	<u>NOTES</u>
	RELAYED TRANSMISSION INDICATOR	AR	None	NA	NA	NA	G1
	TYPE MODIFIER	AR	None	NA	NA	NA	
	TRACK NUMBER, SOURCE	AT	CR	See General Note 2	PU/RU Address	RX	G1, G2, G12
	SECURE DATA UNIT SERIAL NUMBER	AR	None	NA	NA	NA	

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-J2.0. J2.0 Message Data Element Translation from Link 11/11B (Sheet 1 of 3)

WORD J2.0I	Link 16	TRANSLATION			Link 11/11B	VALUE	NOTES
	DATA ELEMENT WORD FORMAT	VALUE 0	REQUIRED None	MESSAGE NA	FIELD NA		
	LABEL, J-SERIES	2	CR	M.1 and/or M.5(PT=13)	LABEL LABEL	1 5	
	SUBLABEL, J-SERIES	0	CR	M.1 and/or M.5(PT=13)	LABEL LABEL	1 5	
	MESSAGE LENGTH INDICATOR	AR	None	NA	NA	NA	G3
	EXERCISE INDICATOR	0	None	NA	NA	NA	
	FORCE TELL INDICATOR	AT	CR	M.9A(AC=5 OR 7)	STATUS INDICATOR	1	G4
	EMERGENCY INDICATOR	AT	CR	M.9A(AC=5 OR 7)	STATUS INDICATOR	0	G4
	COMMAND AND CONTROL INDICATOR	1	None	NA	NA	NA	1
	SIMULATION INDICATOR	RX	=	M.1 or M.9A(AC=0)	SIMULATION INDICATOR, 1 SIMULATION INDICATOR	RX RX	G6 G6
	ALTITUDE, 25 FT	AT	CR	M.81 or M.85	HEIGHT/DEPTH SCALE INDICATOR ORIGINATOR ENVIRONMENT/ CATEGORY HEIGHT/DEPTH HEIGHT/DEPTH SWITCH	RX RX RX RX	G10 G10
	SITE	AT	CR	M.5	POINT POINT AMPLIFY	13 RX	2
	UNIT TYPE	RX	=	M.81	UNIT TYPE	RX	
	ORIGINATOR ENVIRONMENT/ CATEGORY	RX	=	M.81	ORIGINATOR ENVIRONMENT/ CATEGORY	RX	
J2.0E0	WORD FORMAT	2	None	NA	NA	NA	

C-367

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J2.0. J2.0 Message Data Element Translation from Link 11/11B (Sheet 2 of 3)

WORD	Link 16		TRANSLATION		Link 11/11B		
	DATA ELEMENT	VALUE	REQUIRED	MESSAGE	FIELD	VALUE	NOTES
J2.0E0 (Cont'd)	LATITUDE, 0.0103 MINUTE	AT	CR	M.1 or	REFERENCE/POSITION INDICATOR	RX	3
				M.5	DELTA LATITUDE SCALE INDICATOR	RX RX	G9
	LONGITUDE, 0.0103 MINUTE	AT	CR	M.1 or	REFERENCE/POSITION INDICATOR	RX	3
				M.5	DELTA LATITUDE SCALE INDICATOR	RX RX	G9
	COURSE	AT	CR	M.81 or	X DOT Y DOT ORIGINATOR ENVIRONMENT/ CATEGORY	RX RX RX	G8
				M.85	SWITCH X DOT Y DOT	0 RX RX	G8
	SPEED	AT	CR	M.81 or	X DOT Y DOT ORIGINATOR ENVIRONMENT/ CATEGORY	RX RX RX	G8
				M.85	SWITCH X DOT Y DOT	0 RX RX	G8
J2.0C1	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	1	None	NA	NA	NA	
	MODE I CODE	AT	CR	M.11D(TR=0)	SWITCH MODE I CODE	0 RX	4
	MODE II CODE	RX	=	M.11D(TR=0)	MODE II CODE	RX	
	MODE III CODE	RX	=	M.11D(TR=0)	SWITCH MODE III CODE	1 RX	

APPENDIX C

TABLE C.5.2-J2.0. J2.0 Message Data Element Translation from Link 11/11B
(Sheet 3 of 3)

NOTES

1. All M.1 and/or M.5(PT=13) messages translated relate to C² units; therefore, the J2.0 Command and Control Indicator is arbitrarily set to 1 when translating these messages. NonC² units, tracks, and points will be translated to a J3.x series message.

2. Site is determined from M.5 Point = 13, Point Amplify as follows:

Link 16	Link 11/11B
SITE	POINT AMPLIFY
0 - NO STATEMENT	0 - NO STATEMENT
1 - FPU/FRU	1 - FPU/FRU
2 - PU	2 - PU
	6 - APU
3 - RU	3 - RU

3. The Delta Latitude/Longitude is applied to a common Data Link Reference Point to determine Latitude and Longitude of the SCC. The Latitude and Longitude converted from the M.1 message are forwarded as unit position when the Reference/Position Indicator = 0. Otherwise, unit position will be converted from the M.5 message.

4. Valid Mode I codes for data link exchange shall range from 01 through 73 (octal) with 31 possible values, those values with least significant digit greater than 3 not being used. The Mode I field of the J2.0C1 IFF Codes are in the order A4, A2, A1, B2, B1, with the most significant bit A4 in bit position 12. The Mode I field of the M.11D IFF Codes are in the order A4, A2, A1, B4, B2, B1 (B4 is never set since the second digit never exceeds 3) and the most significant bit A4 is bit position 23.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-J3.0-1. J3.0 Message Data Element Translation from the M.4A/M.84A Message (Sheet 1 of 7)

Link 16					Link 11/11B		
WORD J3.0I	DATA ELEMENT WORD FORMAT	TRANSLATION			FIELD NA	VALUE NA	NOTES
		VALUE 0	REQUIRED None	MESSAGE NA			
	LABEL, J-SERIES	3	CR	M.4A	LABEL	4	1
	SUBLABEL, J-SERIES	0	CR	M.4A	SUB LABEL	0	1
	MESSAGE LENGTH INDICATOR	AR	None	NA	NA	NA	G3
	EXERCISE INDICATOR	0	None	NA	NA	NA	
	RESPONSE INDICATOR	0	None	NA	NA	NA	
	FORCE TELL INDICATOR	AT	CR	M.9A(AC=5 OR 7)	STATUS INDICATOR	1	G4
	SPECIAL PROCESSING INDICATOR	RX	=	M.1 or M.9A(AC=0)	SPECIAL PROCESSING INDICATOR	RX	G5
	SIMULATION INDICATOR	RX	=	M.9A(AC=0)	SIMULATION INDICATOR	RX	G6
	TRACK NUMBER, REFERENCE	AT	CR	M.4A	TRACK NUMBER	RX	G13
	SLAVED INDICATOR	0	None	NA	NA	NA	
	LINE/AREA CONTINUATION INDICATOR	0	None	NA	NA	NA	
	PERIODIC REPORT INDICATOR	0	None	NA	NA	NA	
	TIME FUNCTION	AT	CR	M.4B M.84A M.84A or M.84A	TIME SWITCH ASW POINT TYPE NOTACK DURATION FWDA DURATION	RX RX RX RX	2
	POINT/LINE/AREA DESCRIPTOR, 1	AT	CR	M.84A	ASW POINT TYPE	RX	10
	POINT TYPE	7 or 8	CR	M.4A M.84A	DATA REPORT TYPE ASW POINT TYPE	3 RX	3
	POINT AMPLIFICATION	AT	CR	M.4A M.84A	DATA REPORT TYPE ASW POINT TYPE	3 RX	3

TABLE C.5.2-J3.0-1. J3.0 Message Data Element Translation from the M.4A/M.84A Message (Sheet 2 of 7)

WORD	Link 16 DATA ELEMENT	TRANSLATION			Link 11/11B		
		VALUE	REQUIRED	MESSAGE	FIELD	VALUE	NOTES
J3.0I (Cont'd)	MINUTE	AT	CR	M.4B	MINUTES TIME SWITCH	RX RX	4
	HOUR	AT	CR	M.4B	HOURS TIME SWITCH	RX RX	5
J3.0E0	WORD FORMAT	2	None	NA	NA	NA	
	TYPE OF BURST	0	None	NA	NA	NA	
	LATITUDE, 0.0103 MINUTE	AT	CR	M.4A	SCALE INDICATOR X COORDINATE Y COORDINATE	RX RX RX	G9
	ESTIMATED YIELD	0	None	NA	NA	NA	
	LONGITUDE, 0.0103 MINUTE	AT	CR	M.4A	SCALE INDICATOR X COORDINATE Y COORDINATE	RX RX RX	G9
	ALTITUDE, 100 FT 1	1023	None	NA	NA	NA	
	ALTITUDE, 100 FT 2	1023	None	NA	NA	NA	
J3.0C1	NOT TRANSLATED						
J3.0C2	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	2	None	NA	NA	NA	
	SPEED	AT	CR	M.84A	SPEED	RX	7
	TRACK NUMBER, RELATED	0	None	NA	NA	NA	
	COURSE	AT	CR	M.84A	COURSE/BEARING INDICATOR COURSE/BEARING	RX RX	8
	SQUARE/CIRCLE SWITCH	AT	CR	M.4A M.84A	DATA REPORT TYPE ASW POINT TYPE	3 RX	6
	AXIS ORIENTATION	0	None	NA	NA	NA	9

C-372

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J3.0-1. J3.0 Message Data Element Translation from the M.4A/M.84A Message (Sheet 3 of 7)

WORD	Link 16 DATA ELEMENT	TRANSLATION			Link 11/11B		
		VALUE	REQUIRED	MESSAGE	FIELD	VALUE	NOTES
J3.0C2 (Cont'd)	AREA MAJOR AXIS	AT	CR	M.84A	NOTACK RADIUS	RX	6
	AREA MINOR AXIS	AT	CR	M.84A	NOTACK RADIUS	RX	6
J3.0C3	NOT TRANSLATED						
J3.0C4	NOT TRANSLATED						
J3.0C5	WORD FORMAT	0	None	NA	NA	NA	
	CONTINUATION WORD LABEL	5	None	NA	NA	NA	
	ENVIRONMENT/CATEGORY	4	CR	M.84A	ASW POINT TYPE	13	
	SPACE AMPLIFICATION	0	None	NA	NA	NA	
	AIR AMPLIFICATION	0	None	NA	NA	NA	
	SURFACE (MARITIME) AMPLIFICATION	0	None	NA	NA	NA	
	SUBSURFACE (MARITIME) AMPLIFICATION	RX	CR	M.84A	TORPEDO TYPE	RX	G15
	LAND (GROUND) AMPLIFICATION	0	None	NA	NA	NA	
	AMPLIFICATION CONFIDENCE	0	None	NA	NA	NA	
	SQUARE/CIRCLE SWITCH	RX	=	M.84A	SQUARE/CIRCLE SWITCH, 1	RX	
	AXIS ORIENTATION	RX	=	M.84A	AXIS ORIENTATION	RX	
	AREA MAJOR AXIS, 4	RX	=	M.84A	AREA MAJOR AXIS	RX	
	AREA MINOR AXIS, 4	RX	=	M.84A	AREA MINOR AXIS	RX	
	SECOND	63	None	NA	NA	NA	
	TRACK NUMBER, RELATED 2	0	None	NA	NA	NA	
	CONNECT/DISCONNECT	0	None	NA	NA	NA	

C-373

APPENDIX C

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-J3.0-1. J3.0 Message Data Element Translation from the M.4A/M.84A Message (Sheet 4 of 7)

NOTES

1. The J3.0 message is only translated from an M.4A message when Data Report Type is 3.
2. If data are forwarded when the M.4B is not received, the Time Function shall be forwarded as No Statement. The Time Function is determined from the M.4B Time Switch and M.84A ASW Point Type fields as follows:

Link 16	Link 11/11B	
TIME FUNCTION	TIME SWITCH	ASW POINT TYPE
0 - NO STATEMENT	0 - NO STATEMENT	All
1 - ACTIVATION TIME	1 - GMT OF ACQUISITION/ OBSERVATION/ ESTABLISHMENT/ COMMENCEMENT	12 or 13
5 - TIME POINT ESTABLISHED	1 - GMT OF ACQUISITION/ OBSERVATION/ ESTABLISHMENT/ COMMENCEMENT	All except 12 or 13

Both the Time of Activation and the Time of Deactivation shall be forwarded for NOTACK Areas or Friendly Weapon Danger Areas (FWDAs) (ASW Point Type 12 or 13). Two J3.0 messages shall be transmitted sequentially to report the times. The first J3.0 message reports the Activation Time as determined from the time given in the M.4B. If no M.4B is received, the NOTACK or FWDA message is not forwarded. The second J3.0 message reports the Deactivation Time as determined by translating the M.84A NOTACK or FWDA Duration value and adding the resulting Hours and Minutes to the Activation Time.

The J3.0 Deactivation Time (Time Function = 2) is determined by adding the translated M.84A NOTACK Duration value to the Activation Time for the NOTACK. The NOTACK Duration translation is as follows:

APPENDIX C

TABLE C.5.2-J3.0-1. J3.0 Message Data Element Translation from the M.4A/M.84A Message (Sheet 5 of 7)

NOTES (Continued)

2. (Continued)

Link 16		Link 11/11B
HRUR	MINUTE	NOTACK DURATION
0	30	1 - 30 MINUTES
1	0	0 - 1 HOUR
1	30	2 - 1 HOUR 30 MINUTES
2	0	3 - 2 HOURS

3. The Point Type (PT) and Point Amplification fields are determined from the M.84A ASW Point Type field as follows:

Link 16		Link 11/11B
POINT TYPE	POINT AMPLIFICATION	ASW POINT TYPE
7 - ASW	0 - NO STATEMENT	0 - NO STATEMENT
	1 - SINKER	7 - ASW SUBSURFACE STATION
	2 - BRIEF CONTACT	14-63 - UNDEFINED
	3 - SEARCH CENTER (ASW)	1 - SINKER
	4 - ESTIMATED POSITION (EP)	2 - BRIEF CONTACT
	5 - FIX (ASW)	3 - ASW SEARCH CENTER
	6 - NOTACK AREA	
	10 - SONOBUOY PATTERN REFERENCE POSITION	11 - ESTIMATED POSITION
	13 - FRIENDLY WEAPON DANGER AREA (FWDA)	10 - FIX
8 - ASW, 1	0 - CHARTED WRECK	12 - NOTACK AREA
	1 - BOTTOMED NONSUBMARINE	4 - SONOBUOY PATTERN REFERENCE POSITION
	2 - ASW STATION	13 - FRIENDLY WEAPON DANGER AREA (FWDA)
		6 - CHARTED WRECK
		9 - BOTTOMED NONSUBMARINE
		5 - ASW STATION

4. The J3.0I Minute field is determined from the M.4B Minutes and Time Switch fields as follows:

Link 16	Link 11/11B	
MINUTE	TIME SWITCH	MINUTES
0-59 - 0 THROUGH 59	1	0-59 - 0 THROUGH 59 MINUTES
63 - NO STATEMENT	0, 2, 3	Any

APPENDIX C

TABLE C.5.2-J3.0-1. J3.0 Message Data Element Translation from the M.4A/M.84A Message (Sheet 6 of 7)

NOTES (Continued)

5. The J3.0I Hour field is determined from the M.4B Hours and Time Switch fields as follows:

Link 16	Link 11/11B	
HOUR	TIME SWITCH	HOURS
0-23 (0-23 HOURS)	1	0-23 - 0 THROUGH 23 HOURS
31 - NO STATEMENT	0, 2, 3	ANY

6. If M.84A ASW Point Type = 12 (NOTACK Area), J3.0C2 Square/Circle Switch shall be set to value 2, and Area Major Axis and Area Minor Axis shall be equal, and determined from M.84A NOTACK Radius as follows:

Link 16	Link 11/11B	
AREA MAJOR AXIS	AREA MINOR AXIS	NOTACK RADIUS
2 (8 dm)	2 (8 dm)	1 - 5 DM
3 (12 dm)	3 (12 dm)	0 - 10 DM
4 (16 dm)	4 (16 dm)	2 - 15 DM
5 (20 dm)	5 (20 dm)	3 - 20 DM

Other than the above case, J3.0C2 Square/Circle Switch, Area Major Axis, and Area Minor Axis shall be set to No Statement.

7. The Speed field is determined as follows:

Link 16	Link 11/11B
SPEED	SPEED
0-63 (0-126 Data Miles/Hour)	0-126 - 0 THROUGH 126 DM/HR
2047 - NO STATEMENT	127 - NO STATEMENT

Link 11/11B speed is in 1 dm/h increments, and Link 16 speed is in 2dm/h increments. Translate Link 11/11B to the nearest Link 16 increment, rounded up. For example, Link 11/11B speed of 33dm/h shall translate to 34 dm/h in Link 16 vice 32 dm/h.

8. The J3.0C2 Course field is determined from the M.84A Course/Bearing and Course/Bearing Indicator (CBI) fields as follows:

APPENDIX C

TABLE C.5.2-J3.0-1. J3.0 Message Data Element Translation from the M.4A/M.84A Message (Sheet 7 of 7)

NOTES (Continued)

8. (Continued)

<u>Link 16</u>	<u>Link 11/11B</u>	
<u>COURSE</u>	<u>COURSE/BEARING</u>	<u>COURSE/BEARING</u>
<u>INDICATOR</u>		
0-359 - 0 THROUGH 359 DEGREES	1	0-255 (0-358 19/32 Degrees)
511 - NO STATEMENT	0	Any

Link 11/11B Course/Bearing is in 360/256 degree increments, and Link 16 Course is in 1 degree increments. Translate Link 11/11B to the nearest Link 16 increment (.5 rounded up). For example, Link 11/11B Course/Bearing of 21 16/32 degrees shall translate to 22 degrees in Link 16 vice 21 degrees.

9. Since the M.84A reports a NOTACK Area with only a radius, the area will be a circle and the Axis Orientation field in the J3.0C2 word shall be set to 0 indicating True North.

10. When forwarding a NOTACK Area or FWDA, the J3.0 Point/Line/Area Descriptor, 1 field shall be set to value 1 (Single Point Area). Otherwise it shall be set to value 0 (Point).

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-J3.0-2. J3.0 Message Data Element Translation from the M.4C/M.84C Message (Sheet 1 of 6)

Link 16					Link 11/11B		
WORD	DATA ELEMENT	TRANSLATION			FIELD	VALUE	NOTES
		VALUE	REQUIRED	MESSAGE			
J3.0I	WORD FORMAT	0	None	NA	NA	NA	
	LABEL, J-SERIES	3	CR	M.4C	LABEL	4	1
	SUBLABEL, J-SERIES	0	CR	M.4C	SUB LABEL	2	1
	MESSAGE LENGTH INDICATOR	AR	None	NA	NA	NA	G3
	EXERCISE INDICATOR	0	None	NA	NA	NA	
	RESPONSE INDICATOR	0	None	NA	NA	NA	
	FORCE TELL INDICATOR	AT	CR	M.9A(AC=5 OR 7)	STATUS INDICATOR	1	G4
	SPECIAL PROCESSING INDICATOR	RX	=	M.1 or M.9A(AC=0)	SPECIAL PROCESSING INDICATOR	RX	G5
	SIMULATION INDICATOR	RX	=	M.9A(AC=0)	SIMULATION INDICATOR	RX	G6
	TRACK NUMBER, REFERENCE	AT	CR	M.4C	TRACK NUMBER	RX	G13
	SLAVED INDICATOR	0	None	NA	NA	NA	
	LINE/AREA CONTINUATION INDICATOR	0	None	NA	NA	NA	
	PERIODIC REPORT INDICATOR	0	None	NA	NA	NA	
	TIME FUNCTION	AT	CR	M.84C	TIME REMAINING	RX	2
	POINT/LINE/AREA DESCRIPTOR, 1		None	NA	NA	NA	
	POINT TYPE	7	None	NA	NA	NA	
	POINT AMPLIFICATION	AT	CR	M.4C	SWITCH	RX	3
	MINUTE	AT	CR	M.84C	TIME REMAINING	RX	2
	HOUR	AT	CR	M.84C	TIME REMAINING	RX	2
J3.0E0	WORD FORMAT	2	None	NA	NA	NA	

TABLE C.5.2-J3.0-2. J3.0 Message Data Element Translation from the M.4C/M.84C Message (Sheet 2 of 6)

Link 16				Link 11/11B			
WORD	DATA ELEMENT	VALUE	TRANSLATION REQUIRED	MESSAGE	FIELD	VALUE	NOTES
J3.0E0 (Cont'd)	TYPE OF BURST	0	None	NA	NA	NA	
	LATITUDE, 0.0103 MINUTE	AT	CR	M.4C	SCALE INDICATOR X COORDINATE Y COORDINATE	RX RX RX	G9
	ESTIMATED YIELD	0	None	NA	NA	NA	
	LONGITUDE, 0.0103 MINUTE	AT	CR	M.4C	SCALE INDICATOR X COORDINATE Y COORDINATE	RX RX RX	G9
	ALTITUDE, 100 FT 1	1023	None	NA	NA	NA	
	ALTITUDE, 100 FT 2	1023	None	NA	NA	NA	
J3.0C1	NOT TRANSLATED						
J3.0C2	NOT TRANSLATED						
J3.0C3	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	3	None	NA	NA	NA	
	CHANNEL NUMBER, SONOBUOY RF	AT	CR	M.4C M.84C	SWITCH CHANNEL AMPLIFY CHANNEL NUMBER	2 or 3 RX RX	4, G15
	DEPTH INDICATOR (SONOBUOY)	RX	=	M.84C	TRANSDUCER DEPTH	RX	
	DEPTH, TRANSDUCER (SONOBUOY)	0	None	NA	NA	NA	
	SONOBUOY TYPE	AT	CR	M.84C	TYPE	RX	
	SONOBUOY PATTERN	0	None	NA	NA	NA	
	SONOBUOY TYPE NUMBER	0	None	NA	NA	NA	5
	SONOBUOY SPACING	0	None	NA	NA	NA	
	SONOBUOY ROW SPACING	0	None	NA	NA	NA	

C-380

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J3.0-2. J3.0 Message Data Element Translation from the M.4C/M.84C Message (Sheet 3 of 6)

Link 16					Link 11/11B		
WORD	DATA ELEMENT	VALUE	TRANSLATION		FIELD	VALUE	NOTES
			REQUIRED	MESSAGE			
J3.0C3 (Cont'd)	SONOBUOY PATTERN RADIUS	0	None	NA	NA	NA	
	BEARING, ASW PLOT	511	None	NA	NA	NA	
	HOLDING CONTACT	RX	=	M.4C	CONTACT STATUS	RX	
J3.0C4	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	4	None	NA	NA	NA	
	TRACK NUMBER, RELATED 1	0	None	NA	NA	NA	
	SONOBUOY TYPE, 1	AT	CR	M.84C	TYPE, 1 SONOBUOY SWITCH	RX 1	5
J3.0C5	NOT TRANSLATED						

APPENDIX C

TABLE C.5.2-J3.0-2. J3.0 Message Data Element Translation from the M.4C/M.84C Message (Sheet 4 of 6)

NOTES

1. The J3.0 message is only translated from an M.4C message when the Switch value is 2 or 3. When the M.4C Switch value is 0 the J5.4 message is forwarded.

2. If the Time Remaining is received in an M.84C message, the J3.0 message will be forwarded with Time Function = 2 (Deactivation Time); otherwise, it will be forwarded with Time Function, Minute, and Hour all set to No Statement. Deactivation Time is determined by adding the translated M.84C Time Remaining value to the current time. The Time Remaining translation is as follows:

Link 16		Link 11/11B
HOURL	MINUTE	TIME REMAINING
0	0	0(0 MINUTES)
	1	1(< 2 MINUTES)
	4	2(< 5 MINUTES)
	9	3(< 10 MINUTES)
	14	4(< 15 MINUTES)
	19	5(< 20 MINUTES)
	24	6(< 25 MINUTES)
	29	7(< 30 MINUTES)
	59	8(< 1 HOUR)
1	59	9(< 2 HOURS)
2		10(< 3 HOURS)
3		11(< 4 HOURS)
4		12(< 5 HOURS)
9		13(< 10 HOURS)
10		14(= OR > 10 HOURS)
31	63	15(NO STATEMENT)

3. The Point Amplification field is determined from the M.4C Switch field as follows:

Link 16	Link 11/11B
POINT AMPLIFICATION	SWITCH
9 - SONOBUOY POSITION	2 - SONOBUOY POSITION
10 - SONOBUOY PATTERN REFERENCE POSITION	3 - REFERENCE SONOBUOY POSITION

APPENDIX C

TABLE C.5.2-J3.0-2. J3.0 Message Data Element Translation from the M.4C/M.84C Message (Sheet 5 of 6)

NOTES (Continued)

4. The M.84C Channel Amplify field (7 bits) reports channel numbers 32 through 99. The Channel Number field (5 bits) reports channel numbers 1 through 31. If M.84C Channel Number is nonzero, J3.0C3 Channel Number, Sonobuoy RF, shall equate to M.84C Channel Number in accordance with General Note 15. If M.84C Channel Number = 0, the J3.0C3 Channel Number, Sonobuoy RF, shall equate to M.84C Channel Amplify if Channel Amplify = 32-99; otherwise, the J3.0C3 Channel Number, Sonobuoy RF field shall be set to value 0.

5. The Sonobuoy Type field and Sonobuoy Type, 1 field are determined from the M.84C Type, Type, 1 and Sonobuoy Switch fields as follows:

Link 16	Link 11/11B	
SONOBUOY TYPE	SWITCH	TYPE
0 - NO STATEMENT	0	0 - NO STATEMENT
		10 - DISUSED
		11 - DISUSED
		13 - DISUSED
1 - BT		1 - BT
2 - LOFAR		2 - LOFAR
3 - RO		3 - RO
4 - DIFAR		4 - DIFAR
5 - VLA		5 - VLA
6 - CAMBS		6 - CAMBS
7 - BARRA		9 - BARRA
10 - VLAD		12 - VLAD
12 - WIDE BAND LOFAR		14 - WIDE BAND LOFAR
13 - DICASS		15 - DICASS
14 - ADAR		7 - ADAR
15 - NUAMP		8 - NUAMP

Link 16	Link 11/11B	
SONOBUOY TYPE, 1	SONOBUOY SWITCH	TYPE, 1
0 - NO STATEMENT	1	0 - NO STATEMENT
		7-15 - UNDEFINED
1 - HIDAR		1 - HIDAR
2 - SSQ110		2 - SSQ110
3 - CAMBS6		3 - CAMBS6
4 - ALFEA		4 - ALFEA
5 - SSQ911		5 - SSQ911

APPENDIX C

TABLE C.5.2-J3.0-2. J3.0 Message Data Element Translation from the
M.4C/M.84C Message (Sheet 6 of 6)

NOTES (Continued)

5. (Continued)

Link 16	Link 11/11B	
SONOBUOY TYPE, 1	SONOBUOY SWITCH	TYPE, 1
6 - SSQ981D		6 - SSQ981D

TABLE C.5.2-J3.0-3. J3.0 Message Data Element Translation from the M.5/M.85 Message (Sheet 1 of 8)

Link 16					Link 11/11B		
<u>WORD</u> J3.0I	<u>DATA ELEMENT</u> WORD FORMAT	<u>TRANSLATION</u>			<u>FIELD</u> NA	<u>VALUE</u> NA	<u>NOTES</u>
		<u>VALUE</u> 0	<u>REQUIRED</u> None	<u>MESSAGE</u> NA			
	LABEL, J-SERIES	3	CR	M.5	LABEL	5	
	SUBLABEL, J-SERIES	0	CR	M.5	LABEL	5	
	MESSAGE LENGTH INDICATOR	AR	None	NA	NA	NA	G3
	EXERCISE INDICATOR	0	None	NA	NA	NA	
	RESPONSE INDICATOR	0	None	NA	NA	NA	
	FORCE TELL INDICATOR	AT	CR	M.9A(AC=5 OR 7)	STATUS INDICATOR	1	G4
	SPECIAL PROCESSING INDICATOR	RX	=	M.1 or M.9A(AC=0)	SPECIAL PROCESSING INDICATOR	RX	G5
	SIMULATION INDICATOR	RX	=	M.9A(AC=0)	SIMULATION INDICATOR	RX	G6
	TRACK NUMBER, REFERENCE	AT	CR	M.5	TRACK NUMBER/ADDRESS	RX	G13
	SLAVED INDICATOR	AT	CR	M.85	REFERENCE	RX	1
	LINE/AREA CONTINUATION INDICATOR	0	None	NA	NA	NA	
	PERIODIC REPORT INDICATOR	1	None	NA	NA	NA	
	TIME FUNCTION	AT	CR	M.85	SWITCH TIME SWITCH	1 RX	2
	POINT/LINE/AREA DESCRIPTOR, 1	0	None	NA	NA	NA	
	POINT TYPE	AT	CR	M.5	POINT POINT AMPLIFY	RX RX	3
	POINT AMPLIFICATION	AT	CR	M.5	POINT POINT AMPLIFY	RX RX	3
	MINUTE	AT	CR	M.85	SWITCH MINUTES	RX RX	4

C-385

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J3.0-3. J3.0 Message Data Element Translation from the M.5/M.85 Message (Sheet 2 of 8)

WORD	Link 16 DATA ELEMENT	TRANSLATION			Link 11/11B		
		VALUE	REQUIRED	MESSAGE	FIELD	VALUE	NOTES
J3.0I (Cont'd)	HOUR	AT	CR	M.85	SWITCH HOURS	RX RX	4
J3.0E0	WORD FORMAT	2	None	NA	NA	NA	5
	TYPE OF BURST	0	None	NA	NA	NA	
	LATITUDE, 0.0103 MINUTE	AT	CR	M.5	SCALE INDICATOR X COORDINATE Y COORDINATE REFERENCE	RX RX RX 0	5, G9
	ESTIMATED YIELD	0	None	NA	NA	NA	
	LONGITUDE, 0.0103 MINUTE	AT	CR	M.5	SCALE INDICATOR X COORDINATE Y COORDINATE REFERENCE	RX RX RX 0	5, G9
	ALTITUDE, 100 FT 1	AT	CR	M.85	SWITCH HEIGHT/DEPTH SWITCH HEIGHT/DEPTH	RX 0 RX	6, G10
	ALTITUDE, 100 FT 2	1023	None	NA	NA	NA	
J3.0C1	WORD FORMAT	1	None	NA	NA	NA	5
	CONTINUATION WORD LABEL	1	None	NA	NA	NA	
	DELTA LATITUDE, 0.0313 MINUTE 1	AT	CR	M.5	SCALE INDICATOR X COORDINATE Y COORDINATE RELATED TRACK NUMBER/ TRACK NUMBER REFERENCE TRACK NUMBER	RX RX RX RX 1 or 2 RX	5, G9
				M.1 or M.2 or M.3 or M.4A or M.4B or M.4C or M.4D or M.5	(POSITION)	RX	
	DELTA LONGITUDE, 0.0313 MINUTE 1	AT	CR	M.5	SCALE INDICATOR X COORDINATE Y COORDINATE	RX RX RX	5, G9

C-386

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J3.0-3. J3.0 Message Data Element Translation from the M.5/M.85 Message (Sheet 3 of 8)

WORD	Link 16		TRANSLATION		Link 11/11B		NOTES
	DATA ELEMENT	VALUE	REQUIRED	MESSAGE	FIELD	VALUE	
J3.0C1 (Cont'd)				M.85	RELATED TRACK NUMBER/ TRACK NUMBER REFERENCE TRACK NUMBER	RX 1 or 2 RX	
				M.1 or M.2 or M.3 or M.4A or M.4B or M.4C or M.4D or M.5	(POSITION)	RX	
	END POINT, 1	0	None	NA	NA	NA	
	DELTA LATITUDE, 0.0313 MINUTE 2	8192	None	NA	NA	NA	
	DELTA LONGITUDE, 0.0313 MINUTE 2	8192	None	NA	NA	NA	
	END POINT, 2	0	None	NA	NA	NA	
J3.0C2	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	2	None	NA	NA	NA	
	SPEED	AT	CR	M.85	SWITCH X DOT Y DOT	RX RX RX	7, G8
	TRACK NUMBER, RELATED	AT	CR	M.85	RELATED TRACK NUMBER/ TRACK NUMBER REFERENCE	RX RX	5, 8, G13
	COURSE	AT	CR	M.85	SWITCH X DOT Y DOT	RX RX RX	7, G8
	SQUARE/CIRCLE SWITCH	0	None	NA	NA	NA	
	AXIS ORIENTATION	255	None	NA	NA	NA	
	AREA MAJOR AXIS	63	None	NA	NA	NA	
	AREA MINOR AXIS	63	None	NA	NA	NA	
J3.0C3	NOT TRANSLATED						

C-387

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J3.0-3. J3.0 Message Data Element Translation from the M.5/M.85 Message (Sheet 4 of 8)

Link 16					Link 11/11B		
WORD	DATA ELEMENT	VALUE	TRANSLATION		FIELD	VALUE	NOTES
J3.0C4	WORD FORMAT	1	None	MESSAGE	NA	NA	8
	CONTINUATION WORD LABEL	4	None	NA	NA	NA	
	TRACK NUMBER, RELATED 1	AT	CR	M.85	RELATED TRACK NUMBER/ TRACK NUMBER REFERENCE	RX 2	5,8, G13
J3.0C5	NOT TRANSLATED						

APPENDIX C

TABLE C.5.2-J3.0-3. J3.0 Message Data Element Translation from the M.5/M.85
Message (Sheet 5 of 8)

NOTES

1. Slaved Indicator is determined from Reference as follows:

Link 16	Link 11/11B
SLAVED INDICATOR	REFERENCE
0	0
1	1
	2

2. When the M.85 Switch field value = 0, the Time Function field is set to 0. When the M.85 Switch field value = 1, the Time Function field is determined from the M.85 Time Switch field as follows:

Link 16	Link 11/11B
TIME FUNCTION	TIME SWITCH
0 - NO STATEMENT	1 - INDICATES THE GMT OF THE OBSERVATION/INFORMATION ON WHICH THE X AND Y IN THE M.5 IS ESTABLISHED.
5 - TIME POINT ESTABLISHED	0 - INDICATES THE GMT OF THE INITIAL OBSERVATION/INFORMATION ON WHICH THE ORIGINAL X AND Y IN THE ORIGINAL M.5 WAS ESTABLISHED.

3. Point Type and Point Amplification are determined from Point and Point Amplify as follows:

Link 16	POINT	Link 11/11B	POINT	POINT AMPLIFY
POINT TYPE	AMPLIFICATION	POINT		
0 - HAZARD	0 - NO STATEMENT	2 - HAZARD	0 - NO STATEMENT	
	1 - NAVIGATION		1 - NAVIGATION	
	2 - MINE		2 - MINE	
	3 - IMPACT POINT		3 - IMPACT POINT	
	4 - GROUND ZERO		4 - GROUND ZERO	
	5 - AIM/WEAPON ENTRY POINT		5 - AIM/WEAPON ENTRY POINT	
	6 - MISSILE LAUNCH POINT		6 - MISSILE LAUNCH POINT	
	7 - ELECTRONIC ATTACK (EA) DECOY		7 - EA DECOY	

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-J3.0-3. J3.0 Message Data Element Translation from the M.5/M.85 Message (Sheet 6 of 8)

NOTES (Continued)

3. (Continued)

Link 16		Link 11/11B	
POINT TYPE	POINT AMPLIFICATION	POINT	POINT AMPLIFY
1 - REFERENCE POINT (GENERAL)	8 - ENGAGEMENT POINT	10 - HAZARD, 1	0 - ENGAGEMENT POINT
	9 - OIL RIG	4 - REFERENCE POINT (GENERAL)	1 - OIL RIG
	0 - NO STATEMENT		0 - NO STATEMENT
	1 - MARSHALL POINT		1 - MARSHAL POINT
	2 - WAYPOINT		2 - WAYPOINT
	3 - CORRIDOR TAB		3 - CORRIDOR TAB
	4 - POSITION AND INTENDED MOVEMENT (PIM)		4 - POSITION AND INTENDED MOVEMENT (PIM)
	5 - DISPOSITION CENTER		5 - DISPOSITION CENTER
	6 - FORMATION CENTER		6 - FORMATION CENTER
	7 - SEARCH AREA		7 - SEARCH AREA
2 - STATION (GENERAL)	8 - VICTOR LIMA (VL)	8 - REFERENCE POINT (GENERAL), 1	0 - VICTOR LIMA (VL)
	9 - SUBMARINE POSITION AND INTENDED MOVEMENT (SIM)		1 - SUBMARINE POSITION AND INTENDED MOVEMENT (SIM)
	0 - NO STATEMENT		0 - NO STATEMENT
	1 - TOMCAT		1 - TOMCAT
	2 - PICKET		2 - PICKET
	3 - RENDEZVOUS		3 - RENDEZVOUS
	5 - REPLENISHMENT		5 - REPLENISHMENT
	6 - RESCUE		6 - RESCUE
	0 - NO STATEMENT		0 - NO STATEMENT
	1 - COMBAT AIR PATROL (CAP)		1 - COMBAT AIR PATROL (CAP)
3 - STATION (AIR)	2 - AIRBORNE EARLY WARNING (AEW)	6 - STATION (AIR)	2 - AIRBORNE EARLY WARNING (AEW)
	3 - ANTISUBMARINE WARFARE (ASW)		3 - ANTISUBMARINE WARFARE (ASW)
	FIXED WING		FIXED WING

APPENDIX C

TABLE C.5.2-J3.0-3. J3.0 Message Data Element Translation from the M.5/M.85 Message (Sheet 7 of 8)

NOTES (Continued)

3. (Continued)

Link 16		Link 11/11B	
POINT TYPE	POINT AMPLIFICATION	POINT	POINT AMPLIFY
	4 - ANTISUBMARINE WARFARE (ASW) HELICOPTER (HELO)		4 - ANTISUBMARINE WARFARE (ASW) HELICOPTER (HELO)
	5 - REPLENISHMENT		5 - REPLENISHMENT
	6 - STRIKE INITIAL POINT (IP)		6 - STRIKE INITIAL POINT (IP)
	7 - TACAN		7 - TACAN
	8 - TANKER	9 - STATION (AIR), 1	0 - TANKER
	12 - ORBIT POINT		1 - ORBIT POINT

4. When Switch = 0, the Link 16 Minute and Hour fields are set to No Statement. When Switch = 1, the Link 11/11B and Link 16 Minute and Hour fields are equivalent.

5. If M.85 Reference = 0, the J3.0E0 is translated. If M.85 Reference = 1 or 2, the J3.0C1 is translated. The FJU shall determine the difference in Latitude and Longitude between the position of the M.85 Related Track Number/Track Number (TN), if available from previous M.1, M.2, M.3, M.4, or M.5 messages, and the position of the slaved point as reported in the M.5 message. The position of the Related Track Number shall be extrapolated to the time in the M.85 message if Time Switch = 1, or to the time of receipt of the M.5/M.85 message if Time Switch = 0 or no M.85(SW=0) message is received. The difference shall be reported as Delta Latitude, 0.0313 Minute 1 and Delta Longitude, 0.0313 Minute 1 in the J3.0C1 message. If the position of Related TN is not available, the M.5/M.85 message with Reference = 1 or 2 shall not be forwarded.

6. When Switch = 0, or when Switch = 1 and Height/Depth Switch = 1, Altitude, 100 Ft 1 shall be forwarded as No Statement. When Switch = 1 and

APPENDIX C

TABLE C.5.2-J3.0-3. J3.0 Message Data Element Translation from the M.5/M.85 Message (Sheet 8 of 8)

NOTES (Continued)

6. (Continued)

Height/Depth Switch = 0, Altitude, 100 Ft 1 is derived from Height/Depth in accordance with General Note 10.

7. When Switch = 1, Speed and Course are forwarded as No Statement. When Switch = 0, Speed and Course are derived from X Dot and Y Dot in accordance with General Note 8.

8. When Reference = 0 or 2, J3.0C2 Track Number, Related shall be set to No Statement, if the J3.0C2 Word is translated. When Reference = 1, J3.0C2 Track Number, Related is translated from M.85 Related Track Number. The J3.0C4 word shall only be translated when Reference = 2.

TABLE C.5.2-J3.0-4. J3.0 Message Data Element Translation from the M.9F(0)/M.89F(0) Message (Sheet 1 of 5)

Link 16					Link 11/11B		
<u>WORD</u> J3.0I	<u>DATA ELEMENT</u> <u>WORD FORMAT</u>	<u>VALUE</u> 0	<u>TRANSLATION</u>		<u>FIELD</u> NA	<u>VALUE</u> NA	<u>NOTES</u>
			<u>REQUIRED</u> None	<u>MESSAGE</u> NA			
	LABEL, J-SERIES	3	CR	M.9F(0) or	LABEL	9	
	SUBLABEL, J-SERIES	0	CR	M.9F(1)	SUBLABEL	5	
	MESSAGE LENGTH INDICATOR	AR	None	NA	NA	NA	G3
	EXERCISE INDICATOR	0	None	NA	NA	NA	
	RESPONSE INDICATOR	0	None	NA	NA	NA	
	FORCE TELL INDICATOR	AT	CR	M.9A(AC=5 OR 7)	STATUS INDICATOR	1	G4
	SPECIAL PROCESSING INDICATOR	RX	=	M.1 or M.9A(AC=0)	SPECIAL PROCESSING INDICATOR	RX	G5
	SIMULATION INDICATOR	RX	=	M.9A(AC=0)	SIMULATION INDICATOR	RX	G6
	TRACK NUMBER, REFERENCE	AT	CR	M.9F(0)	TRACK NUMBER	RX	G13
	SLAVED INDICATOR	0	None	NA	NA	NA	
	LINE/AREA CONTINUATION INDICATOR	0	None	NA	NA	NA	
	PERIODIC REPORT INDICATOR	0	None	NA	NA	NA	
	TIME FUNCTION	AT	CR	M.89F(0)	MINUTES HOURS	RX RX	1
	POINT/LINE/AREA DESCRIPTOR, 1	1	CR	M.9F(0)		NA	2
	POINT TYPE	7	CR	M.89F(0)	CATEGORY/PLATFORM SOURCE	3 RX	3
	POINT AMPLIFICATION	12	CR	M.89F(0)	CATEGORY/PLATFORM SOURCE	3 RX	3
	MINUTE	RX	=	M.89F(0)	MINUTES	RX	

C-393

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J3.0-4. J3.0 Message Data Element Translation from the M.9F(0)/M.89F(0) Message (Sheet 2 of 5)

WORD J3.0I (Cont'd)	Link 16	TRANSLATION			Link 11/11B	VALUE RX	NOTES
	DATA ELEMENT HOUR	VALUE RX	REQUIRED =	MESSAGE M.89F(0)	FIELD HOURS		
J3.0E0	WORD FORMAT	2	None	NA	NA	NA	
	TYPE OF BURST	0	None	NA	NA	NA	
	LATITUDE, 0.0103 MINUTE	AT	CR	M.9F(0)	X COORDINATE Y COORDINATE	RX RX	G9
	ESTIMATED YIELD	0	None	NA	NA	NA	
	LONGITUDE, 0.0103 MINUTE	AT	CR	M.9F(0)	X COORDINATE Y COORDINATE	RX RX	G9
	ALTITUDE, 100 FT 1	1023	None	NA	NA	NA	
	ALTITUDE, 100 FT 2	1023	None	NA	NA	NA	
J3.0C1	NOT TRANSLATED						
J3.0C2	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	2	None	NA	NA	NA	
	SPEED	AT	CR	M.9F(1)	SWITCH X DOT Y DOT SCALE INDICATOR	RX RX RX RX	4, G8
	TRACK NUMBER, RELATED	0	None	NA	NA	NA	
	COURSE	AT	CR	M.9F(1)	SWITCH X DOT Y DOT SCALE INDICATOR	RX RX RX RX	4, G8
	SQUARE/CIRCLE SWITCH	AT	CR	M.89F(0)	SQUARE/CIRCLE SWITCH	RX	5
	AXIS ORIENTATION	AT	CR	M.89F(0)	BEARING	RX	G17

C-394

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J3.0-4. J3.0 Message Data Element Translation from the M.9F(0)/M.89F(0) Message (Sheet 3 of 5)

Link 16		TRANSLATION			Link 11/11B		
WORD	DATA ELEMENT	VALUE	REQUIRED	MESSAGE	FIELD	VALUE	NOTES
J3.0C2 (Cont'd)	AREA MAJOR AXIS	AT	CR	M.89F(0)	MAJOR AXIS	RX	G18
	AREA MINOR AXIS	AT	CR	M.89F(0)	MINOR AXIS	RX	G18
J3.0C3	NOT TRANSLATED						
J3.0C4	NOT TRANSLATED						
J3.0C5	NOT TRANSLATED						

APPENDIX C

TABLE C.5.2-J3.0-4. J3.0 Message Data Element Translation from the M.9F(0)/M.89F(0) Message (Sheet 4 of 5)

NOTES

1. The Time Function field is determined from the M.89F(AC=0) Minutes and Hours fields as follows:

Link 16	Link 11/11B	
TIME FUNCTION	HOURS	MINUTES
0 - NO STATEMENT	31 - NO STATEMENT	63 - NO STATEMENT
5 - TIME POINT ESTABLISHED	0000-2359 - GMT of the establishment/update of the area of probability	0000-2359 - GMT of the establishment/update of the area of probability

2. The Point/Line/Area Descriptor, 1 field is determined from the entire M.9F(AC=0)/M.89F(AC=0)/M.9F(AC=1) message sequence. When this message sequence is received, the Point/Line/Area Descriptor, 1 shall be set to 1 (Single Point Area).

3. The Point Type and the Point Amplification fields are determined from the M.89F(AC=0) Category/Platform and Source fields. When the Category/Platform = 3 (Subsurface) and Source is other than 1 (EW Bearings or Fix) or 2 (Intelligence), the Link 16 message is transmitted with the Point Type code for ASW (7), as well as the Point Amplification code for Area of Probability (12). When Source = 1, for any Category/Platform, the M.9F/M.89F is forwarded in J3.7 and J14.0 messages. When Source = 2, for any Category/Platform, the M.9F/M.89F is forwarded in a J3.7 message.

4. When the M.9F(AC=1) Switch = 1, and an M.9F(AC=1) with Switch = 0 has not been previously received, Speed and Course are forwarded as No Statement. When the M.9F(AC=1) Switch = 0, or an M.9F(AC=1) with Switch = 0 has been previously received, Speed and Course are derived from X Dot, Y Dot, and Scale Indicator in accordance with General Note 8.

5. The Square/Circle Switch field is determined as follows:

APPENDIX C

TABLE C.5.2-J3.0-4. J3.0 Message Data Element Translation from the
M.9F(0)/M.89F(0) Message (Sheet 5 of 5)

NOTES (Continued)

5. (Continued)

Link 16

SQUARE/CIRCLE SWITCH1 - SQUARE/RECTANGULAR
2 - CIRCULAR/ELLIPTICAL

Link 11/11B

SQUARE/CIRCLE SWITCH0 - SQUARE/RECTANGLE
1 - CIRCLE/ELLIPSE

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-J3.1. J3.1 Message Data Element Translation from Link 11/11B (Sheet 1 of 4)

Link 16				Link 11/11B			
WORD	DATA ELEMENT	VALUE	TRANSLATION	MESSAGE	FIELD	VALUE	NOTES
			REQUIRED				
J3.1I	WORD FORMAT	0	None	NA	NA	NA	
	LABEL, J-SERIES	3	CR	M.5	LABEL	5	
	SUBLABEL, J-SERIES	1	CR	M.5	LABEL	5	
	MESSAGE LENGTH INDICATOR	AR	None	NA	NA	NA	G3
	EXERCISE INDICATOR	0	None	NA	NA	NA	
	SPECIAL PROCESSING INDICATOR	RX	=	M.1 or M.9A(AC=0)	SPECIAL PROCESSING INDICATOR	RX	G5
	SIMULATION INDICATOR	RX	=	M.9A(AC=0)	SIMULATION INDICATOR	RX	G6
	TRACK NUMBER, REFERENCE	AT	CR	M.5	TRACK NUMBER/ADDRESS	RX	G13
	PERSONNEL INVOLVED	0	None	NA	NA	NA	
	EMERGENCY TYPE	AT	CR	M.5	POINT POINT AMPLIFY	RX RX	1
	TRACK NUMBER, PREVIOUSLY REPORTED	AT	CR	M.9B(AC=6)	TRACK NUMBER TWO	RX	2
J3.1E0	WORD FORMAT	2	None	NA	NA	NA	
	LATITUDE, 0.0051 MINUTE	AT	CR	M.5	SCALE INDICATOR X COORDINATE Y COORDINATE	RX RX RX	G9
	LONGITUDE, 0.0051 MINUTE	AT	CR	M.5	SCALE INDICATOR X COORDINATE Y COORDINATE	RX RX RX	G9
	TIME FUNCTION	AT	CR	M.85	SWITCH TIME SWITCH	1 RX	3
	POSITION ACCURACY	0	None	NA	NA	NA	
	MINUTE	AT	CR	M.85	SWITCH MINUTES	RX RX	4

C-399

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J3.1. J3.1 Message Data Element Translation from Link 11/11B (Sheet 2 of 4)

Link 16					Link 11/11B		
WORD	DATA ELEMENT	TRANSLATION			FIELD	VALUE	NOTES
		VALUE	REQUIRED	MESSAGE			
J3.1E0 (Cont'd)	HOURL	AT	CR	M.85	SWITCH HOURS	RX RX	4
J3.1C1	WORD FORMAT	1	None	NA	NA	NA	5
	CONTINUATION WORD LABEL	1	None	NA	NA	NA	
	MODE I CODE	AT	CR	M.11D(TR=0)	SWITCH MODE I CODE	0 RX	6
	MODE II CODE	RX	=	M.11D(TR=0)	MODE II CODE	RX	
	MODE III CODE	RX	=	M.11D(TR=0)	SWITCH MODE III CODE	1 RX	
	MODE IV INDICATOR	RX	=	M.11D(TR=0)	MODE IV INDICATOR	RX	

APPENDIX C

TABLE C.5.2-J3.1. J3.1 Message Data Element Translation from Link 11/11B
(Sheet 3 of 4)

NOTES

1. The Emergency Type field is determined from Point value = 7 and the Point Amplify fields as follows:

Link 16	Link 11/11B
EMERGENCY TYPE	POINT AMPLIFY
0 - NO STATEMENT/OTHER	0 - NO STATEMENT
	4-7 - UNDEFINED
1 - DOWN AIRCRAFT	1 - DOWN A/C/PU DITCHING
2 - MAN IN WATER	2 - MAN-IN-WATER/PU BAILOUT
5 - DISTRESSED VESSEL	3 - DISTRESSED VESSEL

2. Track Number, Previously Reported is provided if an M.9B(AC=6) message has been received with Track Number One equal to Track Number, Reference of the J3.1I word. In this case the Track Number, Previously Reported, in the J3.1I word, is set to the value received in the M.9B(AC=6) Track Number Two field. If an M.9B(AC=6) message has not been received, then the Track Number, Previously Reported, in the J3.1I word, is set to No Statement.

3. When the M.85 Switch = 1, the Time Function field is determined from the M.85 Time Switch field as follows:

Link 16	Link 11/11B
TIME FUNCTION	TIME SWITCH
0 - NO STATEMENT	1 - INDICATES THE GMT OF THE OBSERVATION/INFORMATION ON WHICH THE X AND Y IN THE M.5 IS ESTABLISHED.
5 - TIME POINT ESTABLISHED	0 - INDICATES THE GMT OF THE INITIAL OBSERVATION/INFORMATION ON WHICH THE ORIGINAL X AND Y IN THE ORIGINAL M.5 WAS ESTABLISHED.

4. Time is received in the M.85 message when Switch = 1.

5. A J3.1C1 word is forwarded if IFF/SIF data are received in an M.11D message for the M.5 message Track Number.

APPENDIX C

TABLE C.5.2-J3.1. J3.1 Message Data Element Translation from Link 11/11B
(Sheet 4 of 4)

NOTES (Continued)

6. Valid Mode I codes for data link exchange shall range from 01 through 73 (octal) with 31 possible values, those values with least significant digit greater than 3 not being used. The Mode I field of the J3.1C1 IFF Codes are in the order A4, A2, A1, B2, B1, with the most significant bit A4 in bit position 12. The Mode I field of the M.11D IFF Codes are in the order A4, A2, A1, B4, B2, B1 (B4 is never set since the second digit never exceeds 3) and the most significant bit A4 is bit position 23.

TABLE C.5.2-J3.2. J3.2 Message Data Element Translation from Link 11/11B (Sheet 1 of 4)

WORD J3.2I	Link 16	TRANSLATION			Link 11/11B	VALUE	NOTES
	DATA ELEMENT	VALUE	REQUIRED	MESSAGE	FIELD		
	WORD FORMAT				NA		
	LABEL, J-SERIES	3	CR	M.2	LABEL	2	
	SUBLABEL, J-SERIES	2	CR	M.2	LABEL	2	
	MESSAGE LENGTH INDICATOR	AR	None	NA	NA	NA	G3
	EXERCISE INDICATOR	AT	CR	M.2	IDENTITY PRIMARY IDENTITY AMPLIFICATION	RX RX	G20
				M.82	IDENTITY AMPLIFICATION	RX	
	PPLI TRACK NUMBER AND IDENTITY INDICATOR	0	None	NA	NA	NA	
	FORCE TELL INDICATOR	AT	CR	M.9A(AC=5 OR 7)	STATUS INDICATOR	1	G4
	EMERGENCY INDICATOR	AT	CR	M.9A(AC=5 OR 7)	STATUS INDICATOR	0	G4
	SPECIAL PROCESSING INDICATOR	RX	=	M.1 or M.9A(AC=0)	SPECIAL PROCESSING INDICATOR	RX	G5
	SIMULATION INDICATOR	RX	=	M.9A(AC=0)	SIMULATION INDICATOR	RX	G6
	TRACK NUMBER, REFERENCE	AT	CR	M.2	TRACK NUMBER	RX	G13
	STRENGTH	AT	CR	M.82	SIZE	RX	1
	ALTITUDE SOURCE	RX	=	M.82	HEIGHT SOURCE	RX	
	ALTITUDE, 25 FT	AT	CR	M.2 M.82	SCALE INDICATOR HEIGHT	RX RX	2
	IDENTITY DIFFERENCE INDICATOR	RX	=	M.9A(AC=1)	CONFLICT INDICATOR	RX	
	TRACK QUALITY	AT	CR	M.2	TRACK QUALITY	RX	4
	IDENTITY CONFIDENCE	0	None	NA	NA	NA	

TABLE C.5.2-J3.2. J3.2 Message Data Element Translation from Link 11/11B (Sheet 2 of 4)

WORD J3.2I (Cont'd)	Link 16		TRANSLATION		Link 11/11B		
	DATA ELEMENT	VALUE	REQUIRED	MESSAGE	FIELD	VALUE	NOTES
	IDENTITY	AT	CR	M.2	IDENTITY PRIMARY IDENTITY AMPLIFICATION IDENTITY AMPLIFICATION	RX RX RX	G20
C-404	IDENTITY AMPLIFYING DESCRIPTOR	AT	CR	M.2	IDENTITY PRIMARY IDENTITY AMPLIFICATION IDENTITY AMPLIFICATION	RX RX	G20
				M.82			
		AT	CR	M.2	IDENTITY PRIMARY IDENTITY AMPLIFICATION IDENTITY AMPLIFICATION	RX RX	G20
				M.82			
	SPECIAL INTEREST INDICATOR	AT	CR	M.2	IDENTITY PRIMARY IDENTITY AMPLIFICATION IDENTITY AMPLIFICATION	RX RX	G20
				M.82			
	J3.2E0	2	None	NA	NA	NA	
	LATITUDE, 0.0051 MINUTE	AT	CR	M.2	SCALE INDICATOR X COORDINATE Y COORDINATE	RX RX RX	G9
	LONGITUDE, 0.0051 MINUTE	AT	CR	M.2	SCALE INDICATOR X COORDINATE Y COORDINATE	RX RX RX	G9
	PASSIVE/ACTIVE INDICATOR	1	None	NA	NA	NA	5
	COURSE	AT	CR	M.2	SCALE INDICATOR SWITCH X DOT Y DOT	RX RX RX	6, G8
				M.82			
	SPEED	AT	CR	M.2	SCALE INDICATOR SWITCH X DOT Y DOT	RX RX RX	6, G8
				M.82			
J3.2C1	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	1	None	NA	NA	NA	

TABLE C.5.2-J3.2. J3.2 Message Data Element Translation from Link 11/11B (Sheet 3 of 4)

WORD J3.2C1 (Cont'd)	Link 16		TRANSLATION		Link 11/11B		
	DATA ELEMENT	VALUE	REQUIRED	MESSAGE	FIELD	VALUE	NOTES
	AIR SPECIFIC TYPE INDICATOR	0	None	NA	NA	NA	
	MODE I CODE	AT	CR	M.11D(TR=0)	SWITCH MODE I CODE	0 RX	7
	MODE II CODE	RX	=	M.11D(TR=0)	MODE II CODE	RX	
	MODE III CODE	RX	=	M.11D(TR=0)	SWITCH MODE III CODE	1 RX	
	MODE IV INDICATOR	RX	=	M.11D(TR=0)	MODE IV INDICATOR	RX	
	PPLI IFF/SIF INDICATOR	0	None	NA	NA	NA	
	AIR PLATFORM	AT	CR	M.2	IDENTITY PRIMARY IDENTITY AMPLIFICATION	RX RX	G20
				M.82	IDENTITY AMPLIFICATION	RX	
	AIR PLATFORM ACTIVITY	AT	CR	M.2	IDENTITY PRIMARY IDENTITY AMPLIFICATION	RX RX	G20
				M.82	IDENTITY AMPLIFICATION	RX	
	MINUTE	AT	CR	M.82	SWITCH TIME	1 RX	6, G15
	HOURL	AT	CR	M.82	SWITCH TIME	1 RX	6, G15

C-405

APPENDIX C

TABLE C.5.2-J3.2. J3.2 Message Data Element Translation from Link 11/11B
(Sheet 4 of 4)

NOTES

1. The Strength field is determined from the Size field as follows:

Link 16	Link 11/11B
STRENGTH	SIZE
0 - NO STATEMENT	0 - NO STATEMENT
1 - 1 UNIT	1 - SINGLE TARGET
13 - 2 THROUGH 7 (FEW) UNITS	2 - FEW (2 TO 7) TARGETS
14 - GREATER THAN 7 (MANY) UNITS	3 - MANY (8 OR MORE) TARGETS

2. The Scale Indicator field determines the scaling of the Height field.

3. Not Used.

4. Track Quality is reported with values 0-7 on Link 11/11B. These values will be translated to identical numerical values for Link 16.

5. The Passive/Active Indicator does not exist on Link 11/11B. The normal for Link 11/11B is considered to be active sensor derived information; therefore, forwarded data will be reported with value = 1 in this field.

6. Time is received in the M.82 message only for nonreal-time tracks. No Statement will be forwarded for Minute and Hour for real-time tracks. X Dot and Y Dot may be received for both real-time and nonreal-time tracks. No Statement will be forwarded for Course and Speed if an M.82 message has not been received with X Dot and Y Dot.

7. Valid Mode I codes for data link exchange shall range from 01 through 73 (octal) with 31 possible values, those values with the least significant digit greater than 3 not being used. The Mode I field of the J3.2C1 IFF Codes are in the order A4, A2, A1, B2, B1, with the most significant bit A4 in bit position 12. The Mode I field of the M11D IFF Codes are in the order A4, A2, A1, B4, B2, B1 (B4 is never set since the second digit never exceeds 3) and the most significant bit A4 is bit position 23.

TABLE C.5.2-J3.3. J3.3 Message Data Element Translation from Link 11/11B (Sheet 1 of 5)

WORD J3.3I	Link 16	TRANSLATION			Link 11/11B	VALUE	NOTES
	DATA ELEMENT WORD FORMAT	VALUE 0	REQUIRED None	MESSAGE NA	FIELD NA		
	LABEL, J-SERIES	3	CR	M.3	LABEL	3	
	SUBLABEL, J-SERIES	3	CR	M.3	LABEL	3	
	MESSAGE LENGTH INDICATOR	AR	None	NA	NA	NA	G3
	EXERCISE INDICATOR	AT	CR	M.3	IDENTITY PRIMARY IDENTITY AMPLIFICATION	RX RX	G21
				M.83	IDENTITY AMPLIFICATION	RX	
	PPLI TRACK NUMBER AND IDENTITY INDICATOR	0	None	NA	NA	NA	
	FORCE TELL INDICATOR	AT	CR	M.9A(AC=5 OR 7)	STATUS INDICATOR	1	G4
	EMERGENCY INDICATOR	AT	CR	M.9A(AC=5 OR 7)	STATUS INDICATOR	0	G4
	SPECIAL PROCESSING INDICATOR	RX	=	M.1 or M.9A(AC=0)	SPECIAL PROCESSING INDICATOR	RX	G5
	SURFACE (MARITIME) SPECIFIC TYPE	0	None	NA	NA	NA	
	SIMULATION INDICATOR	RX	=	M.9A(AC=0)	SIMULATION INDICATOR	RX	G6
	TRACK NUMBER, REFERENCE	AT	CR	M.3	TRACK NUMBER	RX	G13
	STRENGTH	AT	CR	M.83	SIZE	RX	1
	IDENTITY DIFFERENCE INDICATOR	RX	=	M.9A(AC=1)	CONFLICT INDICATOR	RX	
	TRACK QUALITY	AT	CR	M.3	TRACK QUALITY	RX	3
	IDENTITY CONFIDENCE	0	None	NA	NA	NA	
	IDENTITY	AT	CR	M.3	IDENTITY PRIMARY IDENTITY AMPLIFICATION	RX RX	G21

C-407

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J3.3. J3.3 Message Data Element Translation from Link 11/11B (Sheet 2 of 5)

WORD J3.3I (Cont'd)	Link 16		TRANSLATION		Link 11/11B		
	DATA ELEMENT	VALUE	REQUIRED	MESSAGE M.83	FIELD IDENTITY AMPLIFICATION	VALUE RX	NOTES
J3.3E0	IDENTITY AMPLIFYING DESCRIPTOR	AT	CR	M.3	IDENTITY PRIMARY IDENTITY AMPLIFICATION	RX RX	G21
				M.83	IDENTITY AMPLIFICATION	RX	
	SPECIAL INTEREST INDICATOR	AT	CR	M.3	IDENTITY PRIMARY IDENTITY AMPLIFICATION	RX RX	G21
				M.83	IDENTITY AMPLIFICATION	RX	
	WORD FORMAT	2	None	NA	NA	NA	
	LATITUDE, 0.0051 MINUTE	AT	CR	M.3	SCALE INDICATOR X COORDINATE Y COORDINATE	RX RX RX	G9
	LONGITUDE, 0.0051 MINUTE	AT	CR	M.3	SCALE INDICATOR X COORDINATE Y COORDINATE	RX RX RX	G9
	PASSIVE/ACTIVE INDICATOR	1	None	NA	NA	NA	4
	COURSE	AT	CR	M.3 M.83	SCALE INDICATOR SWITCH X DOT Y DOT	RX RX RX RX	5, G8
	SPEED	AT	CR	M.3 M.83	SCALE INDICATOR SWITCH X DOT Y DOT	RX RX RX RX	5, G8
J3.3C1	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	1	None	NA	NA	NA	
	MODE I CODE	AT	CR	M.11D(TR=0)	SWITCH MODE I CODE	0 RX	7

C-408

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J3.3. J3.3 Message Data Element Translation from Link 11/11B (Sheet 3 of 5)

WORD J3.3C1 (Cont'd)	Link 16	TRANSLATION			Link 11/11B	VALUE RX	NOTES
	DATA ELEMENT MODE II CODE	VALUE RX	=	REQUIRED MESSAGE M.11D(TR=0)	FIELD MODE II CODE		
C-409	MODE III CODE	RX	=	M.11D(TR=0)	SWITCH MODE III CODE	1 RX	
	MODE IV INDICATOR	RX	=	M.11D(TR=0)	MODE IV INDICATOR	RX	
	PPLI IFF/SIF INDICATOR	0	None	NA	NA	NA	
	SURFACE (MARITIME) PLATFORM	AT	CR	M.3	IDENTITY PRIMARY IDENTITY	RX RX	G21
				M.83	AMPLIFICATION IDENTITY AMPLIFICATION	RX	
	SURFACE (MARITIME) PLATFORM ACTIVITY	AT	CR	M.3	IDENTITY PRIMARY IDENTITY	RX RX	5, G21
				M.83	AMPLIFICATION IDENTITY AMPLIFICATION	RX	
	CURRENT MISSION	AT	CR	M.83	SWITCH TIME	1 RX	6
					SWITCH TIME	1 RX	
	NOT TRANSLATED						
J3.3C2	NOT TRANSLATED						

APPENDIX C

TABLE C.5.2-J3.3. J3.3 Message Data Element Translation from Link 11/11B
(Sheet 4 of 5)

NOTES

1. The Strength field is determined from the Size field as follows:

Link 16	Link 11/11B
STRENGTH	SIZE
0 - NO STATEMENT	0 - NO STATEMENT
1 - 1 UNIT	1 - SINGLE TARGET
13 - 2 THROUGH 7 (FEW) UNITS	2 - FEW (2 TO 7) TARGETS
14 - GREATER THAN 7 (MANY) UNITS	3 - MANY (8 OR MORE) TARGETS

2. Not Used.

3. Track Quality is reported with values 0-7 on Link 11/11B. These values will be translated to identical numerical values for Link 16.

4. The Passive/Active Indicator does not exist on Link 11/11B. The normal for Link 11/11B is considered to be active sensor derived information; therefore, forwarded data will be reported with value = 1 in this field.

5. If M.83 Current Mission received is listed below, Surface (Maritime) Platform Activity is determined from Current Mission as indicated below, not as indicated in General Note 21. Otherwise, Surface (Maritime) Platform Activity is determined as indicated in General Note 21.

Link 16	Link 11/11B
SURFACE (MARITIME) PLATFORM ACTIVITY	CURRENT MISSION
5 - ANTISURFACE WARFARE	13 - ANTI-SURFACE WARFARE
6 - ELECTRONIC WARFARE (EW)	7 - EW
8 - SEARCH AND RESCUE (SAR)	5 - PLANE GUARD/SAR
12 - NAVAL GUNFIRE SUPPORT	3 - NAVAL GUNFIRE SUPPORT
13 - INTRUDING	11 - INTRUDER
14 - AMPHIBIOUS WARFARE	8 - AMPHIBIOUS ASSAULT
18 - ANTISUBMARINE WARFARE (ASW)	2 - ASW
19 - SHADOWING/INTERVENING	9 - SHADOWER
22 - STRIKE WARFARE	6 - STRIKE
23 - ANTI-AIR WARFARE	1 - AAW
28 - MARKING	10 - MARKER
30 - UNDERWAY REPLENISHMENT	4 - UNDERWAY REPLENISHMENT

APPENDIX C

TABLE C.5.2-J3.3. J3.3 Message Data Element Translation from Link 11/11B
(Sheet 5 of 5)

NOTES (Continued)

6. Time is received in the M.83 message only for nonreal-time tracks. No Statement will be forwarded for Minute and Hour for real-time tracks. X Dot and Y Dot may be received for both real-time and nonreal-time tracks. No Statement will be forwarded for Course and Speed if an M.83 message has not been received with X Dot and Y Dot.

7. Valid Mode I codes for data link exchange shall range from 01 through 73 (octal) with 31 possible values, those values with least significant digit greater than 3 not being used. The Mode I field of the J3.3C1 IFF Codes are in the order A4, A2, A1, B2, B1, with the most significant bit A4 in bit position 12. The Mode I field of the M.11D IFF Codes are in the order A4, A2, A1, B4, B2, B1 (B4 is never set since the second digit never exceeds 3) and the most significant bit A4 is bit position 23.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-J3.4. J3.4 Message Data Element Translation from Link 11/11B (Sheet 1 of 10)

WORD J3.4I	Link 16		TRANSLATION		Link 11/11B		
	DATA ELEMENT WORD FORMAT	VALUE 0	REQUIRED None	MESSAGE NA	FIELD NA	VALUE NA	NOTES
	LABEL, J-SERIES	3	CR	M.4A	LABEL	4	1
	SUBLABEL, J-SERIES	4	CR	M.4A	SUB LABEL	0	1
	MESSAGE LENGTH INDICATOR	AR	None	NA	NA	NA	G3
	EXERCISE INDICATOR	0	None	NA	NA	NA	
	PPLI TRACK NUMBER AND IDENTITY INDICATOR	0	None	NA	NA	NA	
	FORCE TELL INDICATOR	AT	CR	M.9A(AC=5 OR 7)	STATUS INDICATOR	1	G4
	EMERGENCY INDICATOR	AT	CR	M.9A(AC=5 OR 7)	STATUS INDICATOR	0	G4
	SPECIAL PROCESSING INDICATOR	RX	=	M.1 or M.9A(AC=0)	SPECIAL PROCESSING INDICATOR	RX	G5
	SIMULATION INDICATOR	RX	=	M.9A(AC=0)	SIMULATION INDICATOR	RX	G6
	TRACK NUMBER, REFERENCE	AT	CR	M.4A	TRACK NUMBER	RX	G13
	DATA REPORT TYPE	AT	CR	M.4A M.84A	DATA REPORT TYPE DEPTH INDICATOR DEPTH	RX RX RX	1
	IDENTITY	AT	CR	M.4A	IDENTITY	RX	2
	IDENTITY AMPLIFYING DESCRIPTOR	NA	None	NA	NA	NA	
	CONFIDENCE LEVEL	AT	CR	M.84A	CLASSIFICATION CLASSIFICATION AMPLIFICATION POSSIBLE SUBMARINE	RX RX RX	3
	SUBSURFACE (MARITIME) PLATFORM	AT	CR	M.84A M.4B	CLASSIFICATION CLASSIFICATION AMPLIFICATION MISSILE CAPABILITY	RX RX RX	4

TABLE C.5.2-J3.4. J3.4 Message Data Element Translation from Link 11/11B (Sheet 2 of 10)

WORD J3.4I (Cont'd)	Link 16	TRANSLATION			Link 11/11B	VALUE RX	NOTES 5
	DATA ELEMENT SUBSURFACE (MARITIME) PLATFORM ACTIVITY	VALUE AT	REQUIRED CR	MESSAGE M.4B	FIELD MISSION		
J3.4E0	IDENTITY DIFFERENCE INDICATOR	0	None	NA	NA	NA	6
	LAUNCH CAPABILITY	AT	CR	M.4B	MISSILE CAPABILITY	RX	13
	WORD FORMAT	2	None	NA	NA	NA	
	LATITUDE, 0.0051 MINUTE	AT	CR	M.4A	SCALE INDICATOR X COORDINATE Y COORDINATE	RX RX RX	G9
	LONGITUDE, 0.0051 MINUTE	AT	CR	M.4A	SCALE INDICATOR X COORDINATE Y COORDINATE	RX RX RX	G9
J3.4C1	COURSE	AT	CR	M.84A	COURSE/BEARING INDICATOR COURSE/BEARING	RX RX	7
	SPEED, ASW	AT	CR	M.84A	SPEED	RX	8
	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	1	None	NA	NA	NA	
	MINUTE	RX	=	M.4B	MINUTES	RX	
	HOUR	RX	=	M.4B	HOURS	RX	
	DEPTH, 15 METERS	AT	CR	M.84A	DEPTH DEPTH INDICATOR	RX 0	G11
	DEPTH CONTACT	AT	CR	M.84A	DEPTH DEPTH INDICATOR	RX 1	9
	SENSOR	AT	CR	M.84A	SENSOR	RX	10
	MODE I CODE	AT	CR	M.11D(TR=0)	SWITCH MODE I CODE	0 RX	11

C-414

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J3.4. J3.4 Message Data Element Translation from Link 11/11B (Sheet 3 of 10)

WORD J3.4C1 (Cont'd)	Link 16	TRANSLATION			Link 11/11B	VALUE RX	NOTES
	DATA ELEMENT MODE II CODE	VALUE RX	REQUIRED =	MESSAGE M.11D(TR=0)	FIELD MODE II CODE		
J3.4C2	MODE III CODE	RX	=	M.11D(TR=0)	SWITCH MODE III CODE	1 RX	
	MODE IV INDICATOR	RX	=	M.11D(TR=0)	MODE IV INDICATOR	RX	
	TIME FUNCTION, ASW	AT	CR	M.4A	NONREAL-TIME INDICATOR	RX	12
				M.4B	TIME SWITCH	RX	
	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	2	None	NA	NA	NA	
	SUBSURFACE (MARITIME) SPECIFIC TYPE	0	None	NA	NA	NA	
	DATUM ERROR	RX	=	M.4B	DATUM ERROR	RX	

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-J3.4. J3.4 Message Data Element Translation from Link 11/11B
(Sheet 4 of 10)

NOTES

1. The J3.4I Data Report Type field shall be determined as follows:

Link 16	Link 11/11B		
DATA REPORT TYPE	DATA REPORT TYPE	DEPTH INDICATOR	DEPTH
0 - SUBSURFACE TRACK	0 - SUBSURFACE TRACK	0	Any
1 - SURFACED SUBMARINE	1 - SURFACED SUBMARINE	1	Other than 1
2 - SNORKELING SUBMARINE	0 - SUBSURFACE TRACK	0 or 1	Any
4 - DATUM	2 - DATUM	1	1 - SNORKELING
		0 or 1	Any

2. The J3.4I Identity field is determined as follows:

Link 16	Link 11/11B
IDENTITY	IDENTITY
0 - PENDING	0 - NO STATEMENT/PENDING
1 - UNKNOWN	3 - UNKNOWN
3 - FRIEND	1 - FRIEND
6 - HOSTILE	2 - HOSTILE

3. The Confidence Level field is determined from the M.84A Classification, Classification Amplification, and Possible Submarine fields as follows:

Link 16	Link 11/11B		
CONFIDENCE LEVEL	CLASSIFICATION	CLASSIFICATION AMPLIFICATION	POSSIBLE SUBMARINE
0 - NO STATEMENT	0 - NO STATEMENT	0 - NO STATEMENT	(NOT INTERPRETED)
2 - POSSIBLE SUBMARINE LOW ONE	7 - UNDEFINED 1 - POSSIBLE SUBMARINE	ANY	0 - NO STATEMENT
3 - POSSIBLE SUBMARINE LOW TWO			1 - POSSIBLE SUBMARINE 1 2 - POSSIBLE SUBMARINE 2 5-7 - UNDEFINED

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-J3.4. J3.4 Message Data Element Translation from Link 11/11B
(Sheet 5 of 10)

NOTES (Continued)

3. (Continued)

Link 16	Link 11/11B		
CONFIDENCE LEVEL	CLASSIFICATION	CLASSIFICATION AMPLIFICATION	POSSIBLE SUBMARINE
4 - POSSIBLE SUBMARINE HIGH THREE			3 - POSSIBLE SUBMARINE 3
5 - POSSIBLE SUBMARINE HIGH FOUR			4 - POSSIBLE SUBMARINE 4
6 - PROBABLE SUBMARINE	2 - PROBABLE SUBMARINE 5 - ACOUSTIC POSITIVE		(NOT INTERPRETED)
7 - CERTAIN SUBMARINE	3 - CERTAIN SUBMARINE		
8 - NON SUBMARINE	4 - NONSUBMARINE	0, 2-7	
9 - SURFACE VESSEL	6 - TORPEDO 4 - NONSUBMARINE	ANY 1 - SURFACE VESSEL	

4. The J3.4I Subsurface (Maritime) Platform is determined from the M.84A Classification and Classification Amplification and M.4B Missile Capability fields as follows:

Link 16	Link 11/11B		
SUBSURFACE (MARITIME) PLATFORM	CLASSIFICATION	CLASSIFICATION AMPLIFICATION	MISSILE CAPABILITY
0	0 or 7	0	0
	1-3, 5	0 or 4-7	0
1	1-3, 5	1	0
2		2	0
5			1 or 2
9		3	0
12	0	0	1 or 2
	1-3, 5	0	1 or 2
		1	1 or 2
		3	1 or 2
18	4	0	NA
19		1	NA
20	6	Any	NA
21	4	4	NA
22		3	NA
23		7	NA
25		5	NA

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-J3.4. J3.4 Message Data Element Translation from Link 11/11B
(Sheet 6 of 10)

NOTES (Continued)

4. (Continued)

<u>Link 16</u>	<u>Link 11/11B</u>		
<u>SUBSURFACE</u>			
<u>(MARITIME)</u>			
<u>PLATFORM</u>	<u>CLASSIFICATION</u>	<u>CLASSIFICATION</u>	<u>MISSILE</u>
		<u>AMPLIFICATION</u>	<u>CAPABILITY</u>
27		6	NA
29	0	0	3 or 4
	1-3, 5	Any	3 or 4

5. The Subsurface (Maritime) Platform Activity is determined from the M.4B Mission field as follows:

<u>Link 16</u>	<u>Link 11/11B</u>
<u>SUBSURFACE (MARITIME) PLATFORM</u>	<u>MISSION</u>
<u>ACTIVITY</u>	
0 - NO STATEMENT	0 - NO STATEMENT
	8 - INTRUDER
	11-15 - UNDEFINED
1 - RECONNAISSANCE	3 - RECONNAISSANCE
5 - ANTISURFACE WARFARE	1 - ANTISHIPPING
8 - SEARCH AND RESCUE (SAR)	6 - SPECIAL/SAR
9 - ESCORTING	7 - ESCORT
10 - MINELAYING	4 - MINE LAYING
11 - TRANSITING	5 - TRANSITING
18 - ANTISUBMARINE WARFARE (ASW)	2 - ANTISUBMARINE

6. The Identity Difference Indicator does not relate to the Link 11/11B M.9A(AC=1) Information Difference Report message.

7. The J3.4E0 Course field is determined from the M.84A Course/Bearing and Course/Bearing Indicator (CBI) fields as follows:

<u>Link 16</u>	<u>Link 11/11B</u>	
	<u>COURSE/BEARING</u>	
<u>COURSE</u>	<u>INDICATOR</u>	<u>COURSE/BEARING</u>
0-359 - 0 THROUGH 359	1	0-255 (0-358 19/32
DEGREES		degrees)
511 - NO STATEMENT	0	(NOT INTERPRETED)

Link 11/11B Course/Bearing is in 360/256 degree increments, and Link 16 Course is in 1 degree increments. Translate Link 11/11B to the nearest Link

APPENDIX C

TABLE C.5.2-J3.4. J3.4 Message Data Element Translation from Link 11/11B
(Sheet 7 of 10)

NOTES (Continued)

7. (Continued)

16 Increment (.5 rounded up). For example, Link 11/11B Course/Bearing of 21 16/32 degrees shall translate to 22 degrees in Link 16 vice 21 degrees.

8. Link 11/11B Speed is in 1 data mile per hour increments and Link 16 Speed is in 0.5 data mile per hour increments. Therefore, the Link 11/11B Speed shall translate to an identical speed in Link 16. Value 127 (No Statement) shall translate to value 511 (No Statement).

9. The Depth Contact field is determined from the M.84A Depth and Depth Indicator fields as follows:

Link 16	Link 11/11B
DEPTH CONTACT	DEPTH
0 - NO STATEMENT	0 - UNKNOWN/NO STATEMENT
	11-63 - UNDEFINED
1 - ESTIMATED SHALLOW	1 - SNORKELING
	2 - ESTIMATED SHALLOW
2 - ABOVE LAYER	4 - ABOVE FIRST LAYER
3 - BELOW LAYER	5 - BELOW FIRST LAYER
	6 - BETWEEN FIRST AND SECOND LAYER
	7 - BETWEEN SECOND AND THIRD LAYERS
	8 - BELOW BOTTOM LAYER
4 - ESTIMATED DEEP	9 - ESTIMATED DEEP
5 - BOTTOMED	10 - BOTTOMED
7 - PERISCOPE DEPTH	3 - PERISCOPE DEPTH

10. The Sensor field is determined as follows:

Link 16	Link 11/11B
SENSOR	SENSOR
0 - NO STATEMENT/UNKNOWN	0 - NO STATEMENT
	33-57 - UNDEFINED
1 - ACTIVE SONAR	1 - ACTIVE SONAR
	3 - SHIP VARIABLE DEPTH SONAR- ACTIVE
	6 - SUBMARINE ACTIVE SONAR
	8 - HELO ACTIVE SONAR

APPENDIX C

TABLE C.5.2-J3.4. J3.4 Message Data Element Translation from Link 11/11B
(Sheet 8 of 10)

NOTES (Continued)

10. (Continued)

Link 16	Link 11/11B
SENSOR	SENSOR
2 - PASSIVE SONAR	2 - PASSIVE SONAR
	4 - SHIP VARIABLE DEPTH SONAR-PASSIVE
	7 - SUBMARINE PASSIVE SONAR
	9 - HELO PASSIVE SONAR
3 - PASSIVE SONOBUOY	20 - PASSIVE SONOBUOY
4 - ACTIVE SONOBUOY	18 - ACTIVE SONOBUOY (RANGE AND BEARING)
	19 - ACTIVE SONOBUOY (RANGE ONLY)
	59 - CASS
5 - MAD	13 - MAD
6 - VISUAL	27 - VISUAL
7 - RADAR	10 - RADAR
8 - ES	12 - ES
9 - TAS/TAC TAS	30 - TOWED ARRAY
	60 - ITASS
10 - IRDS	31 - INFRARED DETECTION SYSTEM
11 - LOFAR	14 - LOFAR (AREA)
	15 - LOFAR (H FIX)
	16 - LOFAR (C FIX)
12 - DIFAR	17 - DIFAR
13 - DIRECT PATH	21 - DIRECT PATH
14 - BOTTOM BOUNCE	22 - BOTTOM BOUNCE
15 - CONVERGENCE ZONE 1	23 - CONVERGENCE ZONE 1
16 - CONVERGENCE ZONE 2	24 - CONVERGENCE ZONE 2
17 - CONVERGENCE ZONE 3	25 - CONVERGENCE ZONE 3
18 - LLLTV	26 - LLLTV
19 - UNDERWATER TELEPHONE	29 - UNDERWATER TELEPHONE [UWT]
20 - INTELLIGENCE	11 - INTELLIGENCE
21 - DESIGNATED FIX	28 - DESIGNATED FIX
22 - PASSIVE SOURCE (CPA)	58 - PASSIVE SOURCE (CPA)
23 - PASSIVE DIRECTIONAL SONOBUOY	32 - PASSIVE DIRECTIONAL SONOBUOY
24 - DICASS	61 - DICASS
25 - SOSUS	62 - SOSUS
26 - FLIR	63 - FLIR
27 - SHIP SONAR	5 - SHIP SONAR (VDS AND HULL MOUNTED)

11. Valid Mode I codes for data link exchange shall range from 01 through 73 (octal) with 31 possible values, those values with least significant digit greater than 3 not being used. The Mode I field of the J3.4C1 IFF Codes are in the order A4, A2, A1, B2, B1, with the most significant bit A4 in bit position 12. The Mode I field of the M.11D IFF Codes are in the order A4,

APPENDIX C

TABLE C.5.2-J3.4. J3.4 Message Data Element Translation from Link 11/11B
(Sheet 9 of 10)

NOTES (Continued)

11. (Continued)

A2, A1, B4, B2, B1 (B4 is never set since the second digit never exceeds 3) and the most significant bit A4 is bit position 23.

12. The J3.4C1 Time Function, ASW field is determined from the M.4A Nonreal-Time (NRT) Indicator and the M.4B Time Switch fields as follows:

Link 16	Link 11/11B	
TIME FUNCTION, ASW	NONREAL-TIME INDICATOR	TIME SWITCH
0 - NO STATEMENT	0 or 1	0 - NO STATEMENT
1 - TIME CONTACT FIRST ACQUIRED/TIME DATUM ESTABLISHED	0	1 - GMT OF ACQUISITION/ OBSERVATION/ ESTABLISHMENT/ COMMENCEMENT
2 - TIME OF CURRENT POSITIONAL DATA	1	1 - GMT OF ACQUISITION/ OBSERVATION/ ESTABLISHMENT/ COMMENCEMENT
3 - TIME CONTACT LOST	0 or 1	3 - GMT OF TIME LOST

13. The J3.4I Launch Capability is determined from the M4.B Missile Capability as follows:

Link 16	Link 11/11B
LAUNCH CAPABILITY	MISSILE CAPABILITY
0 - NO STATEMENT	0 - NO STATEMENT
1 - MAY LAUNCH MISSILE WHILE SUBMERGED	1 - WITH BALLISTIC MISSILE CAPABILITY. MAY LAUNCH MISSILE WHILE SUBMERGED.
	OR
	3 - WITH CRUISE MISSILE CAPABILITY. MAY LAUNCH MISSILE WHILE SUBMERGED.
2 - MUST BE SURFACED TO LAUNCH MISSILE	2 - WITH BALLISTIC MISSILE CAPABILITY. MUST BE SURFACED TO LAUNCH MISSILE.

APPENDIX C

TABLE C.5.2-J3.4. J3.4 Message Data Element Translation from Link 11/11B
(Sheet 10 of 10)

NOTES (Continued)

13. (Continued)

Link 16
LAUNCH CAPABILITY

Link 11/11B
MISSILE CAPABILITY

OR

4 - WITH CRUISE MISSILE CAPABILITY.
MUST BE SURFACED TO LAUNCH
MISSILE.

TABLE C.5.2-J3.5. J3.5 Message Data Element Translation from Link 11/11B (Sheet 1 of 5)

WORD J3.5I	Link 16		TRANSLATION		Link 11/11B		NOTES
	DATA ELEMENT WORD FORMAT	VALUE 0	REQUIRED None	MESSAGE NA	FIELD NA	VALUE NA	
	LABEL, J-SERIES	3	CR	M.5	LABEL	5	
	SUBLABEL, J-SERIES	5	CR	M.5	LABEL	5	
	MESSAGE LENGTH INDICATOR	AR	None	NA	NA	NA	G3
	EXERCISE INDICATOR	0	None	NA	NA	NA	
	FORCE TELL INDICATOR	AT	CR	M.9A(AC=5 OR 7)	STATUS INDICATOR	1	G4
	EMERGENCY INDICATOR	AT	CR	M.9A(AC=5 OR 7)	STATUS INDICATOR	0	G4
	SPECIAL PROCESSING INDICATOR	RX	=	M.1 or M.9A(AC=0)	SPECIAL PROCESSING INDICATOR	RX	G5
	SIMULATION INDICATOR	RX	=	M.9A(AC=0)	SIMULATION INDICATOR	RX	G6
	TRACK NUMBER, REFERENCE	AT	CR	M.5	TRACK NUMBER/ADDRESS	RX	
	STRENGTH	0	None	NA	NA	NA	
	ELEVATION, 25 FT	AT	CR	M.85	SWITCH HEIGHT/DEPTH SWITCH HEIGHT/DEPTH	1 0 RX	G10
	POINT/TRACK INDICATOR	0	None	NA	NA	NA	
	PERIODIC REPORT INDICATOR	1	None	NA	NA	NA	
	PPLI TRACK NUMBER AND IDENTITY INDICATOR	0	None	NA	NA	NA	
	IDENTITY DIFFERENCE INDICATOR	0	None	NA	NA	NA	
	TRACK QUALITY	0	None	NA	NA	NA	
	IDENTITY CONFIDENCE	0	None	NA	NA	NA	
	IDENTITY	AT	CR	M.5	POINT	RX	1

C-423

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J3.5. J3.5 Message Data Element Translation from Link 11/11B (Sheet 2 of 5)

WORD J3.5I (Cont'd)	Link 16		TRANSLATION		Link 11/11B		
	DATA ELEMENT	VALUE	REQUIRED	MESSAGE	FIELD	VALUE	NOTES
	IDENTITY AMPLIFYING DESCRIPTOR	NA	None	NA	NA	NA	
J3.5E0	SPECIAL INTEREST INDICATOR	0	None	NA	NA	NA	
	WORD FORMAT	2	None	NA	NA	NA	
	TRACK IDENTIFIER	0	None	NA	NA	NA	
	LATITUDE, 0.0051 MINUTE	AT	CR	M.5	SCALE INDICATOR X COORDINATE Y COORDINATE	RX RX RX	G9
	LONGITUDE, 0.0051 MINUTE	AT	CR	M.5	SCALE INDICATOR X COORDINATE Y COORDINATE	RX RX RX	G9
	PASSIVE/ACTIVE INDICATOR	0	None	NA	NA	NA	
	COURSE	AT	CR	M.85	SWITCH X DOT Y DOT	0 RX RX	G8
J3.5C1	SPEED	AT	CR	M.85	SWITCH X DOT Y DOT	0 RX RX	G8
	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	1	None	NA	NA	NA	
	LAND (GROUND) SPECIFIC TYPE INDICATOR	0	None	NA	NA	NA	
	MODE I CODE	AT	CR	M.11D(TR=0)	SWITCH MODE I CODE	0 RX	2
	MODE II CODE	RX	=	M.11D(TR=0)	MODE II CODE	RX	
	MODE III CODE	RX	=	M.11D(TR=0)	SWITCH MODE III CODE	1 RX	
	MODE IV INDICATOR	RX	=	M.11D(TR=0)	MODE IV INDICATOR	RX	

C-424

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J3.5. J3.5 Message Data Element Translation from Link 11/11B (Sheet 3 of 5)

WORD	Link 16			Link 11/11B			
	DATA ELEMENT	TRANSLATION		FIELD	VALUE	NOTES	
	PPLI IFF/SIF INDICATOR	VALUE	REQUIRED	MESSAGE	NA	NA	
J3.5C1 (Cont'd)		0	None	NA	NA		
	LAND (GROUND) PLATFORM	AT	CR	M.5	POINT POINT AMPLIFY	RX RX	1
	LAND (GROUND) PLATFORM ACTIVITY	0	None	NA	NA	NA	
	LAND (GROUND) SPECIFIC TYPE	0	None	NA	NA	NA	
	TIME FUNCTION	AT	CR	M.85	SWITCH TIME SWITCH	1 RX	3
	MINUTE	AT	CR	M.85	TIME SWITCH MINUTES	1 RX	G15
	HOUR	AT	CR	M.85	TIME SWITCH HOURS	1 RX	G15
J3.5C2	NOT TRANSLATED						
J3.5C3	NOT TRANSLATED						

C-425

APPENDIX C

TABLE C.5.2-J3.5. J3.5 Message Data Element Translation from Link 11/11B
(Sheet 4 of 5)

NOTES

1. There are only a few Point/Point Amplify values that are translated from Link 11/11B to the J3.5 message. The rest of these are translated into a J3.0, J3.1, or J3.7 message. The translation to the J3.5 message is as follows:

Link 16		Link 11/11B	
IDENTITY	LAND (GROUND) PLATFORM	POINT	POINT AMPLIFY
3 - FRIEND	3 - COMMAND/ CONTROL/ COMMAND AND CONTROL CENTER	14 - SUPPORT UNIT (SU)	0 - NO STATEMENT
	7 - AIRFIELD/ AIRBASE		2 - AIR BASE
	33 - RADAR SITE	1 - RADAR	0 - NO STATEMENT
	40 - SURFACE-TO- AIR MISSILE (SAM) SITE	14 - SUPPORT UNIT (SU)	3 - SAM SITE
	41 - MARITIME HEADQUARTERS		1 - MHQ
	42 - AIR SUPPORT RADAR TEAM (ASRT)		4 - ASRT
	43 - DIRECT AIR SUPPORT CENTER (DASC)		5 - DASC
	44 - FORWARD AIR CONTROL PARTY (FACP)		6 - FACP
	22 - AIR DEFENSE ARTILLERY		7 - ADA/BOC/TDS
	0 - NO STATEMENT	15 - ENEMY POINT	0 - NO STATEMENT
	1 - TROOP CONCENTRATION/ UNIT		1 - TROOP CONCENTRATION
	7 - AIRFIELD/ AIRBASE		2 - AIR BASE
	13 - CONVOY		5 - CONVOY
6 - HOSTILE	18 - TRAIN		6 - RAIL
	21 - FIELD ARTILLERY		4 - ARTILLERY
	26 - BRIDGE		7 - BRIDGE

APPENDIX C

TABLE C.5.2-J3.5. J3.5 Message Data Element Translation from Link 11/11B
(Sheet 5 of 5)

NOTES (Continued)

1. (Continued)

Link 16		Link 11/11B	
IDENTITY	LAND (GROUND) PLATFORM	POINT	POINT AMPLIFY
	40 - SURFACE-TO- AIR MISSILE (SAM) SITE		3 - SAM SITE

2. Valid Mode I codes for data link exchange shall range from 01 through 73 (octal) with 31 possible values, those values with least significant digit greater than 3 not being used. The Mode I field of the J3.5C1 IFF Codes are in the order A4, A2, A1, B2, B1, with the most significant bit A4 in bit position 12. The Mode I field of the M.11D IFF Codes are in the order A4, A2, A1, B4, B2, B1 (B4 is never set since the second digit never exceeds 3) and the most significant bit A4 is bit position 23.

3. When the M.85 Switch field = 1, the Time Function field is determined from the M.85 Time Switch field as follows:

Link 16		Link 11/11B	
TIME FUNCTION		TIME SWITCH	
0 - NO STATEMENT		1 - OBSERVATION/INFORMATION	
5 - TIME POINT ESTABLISHED		0 - INITIAL OBSERVATION/ INFORMATION	

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-J3.7-1. J3.7 Message Data Element Translation from the M.5/M.85 Message (Sheet 1 of 4)

Link 16					Link 11/11B		
<u>WORD</u> J3.7I	<u>DATA ELEMENT</u> WORD FORMAT	<u>TRANSLATION</u>			<u>FIELD</u> NA	<u>VALUE</u> NA	<u>NOTES</u>
		<u>VALUE</u> 0	<u>REQUIRED</u> None	<u>MESSAGE</u> NA			
	LABEL, J-SERIES	3	CR	M.5	LABEL	5	1
	SUBLABEL, J-SERIES	7	CR	M.5	LABEL	5	
	MESSAGE LENGTH INDICATOR	AR	None	NA	NA	NA	G3
	EXERCISE INDICATOR	0	None	NA	NA	NA	
	FORCE TELL INDICATOR	AT	CR	M.9A(AC=5 OR 7)	STATUS INDICATOR	1	G4
	EMERGENCY INDICATOR	AT	CR	M.9A(AC=5 OR 7)	STATUS INDICATOR	0	G4
	SPECIAL PROCESSING INDICATOR	RX	=	M.1 or M.9A(AC=0)	SPECIAL PROCESSING INDICATOR	RX	G5
	SIMULATION INDICATOR	RX	=	M.9A(AC=0)	SIMULATION INDICATOR	RX	G6
	TRACK NUMBER, REFERENCE	AT	CR	M.5	TRACK NUMBER/ADDRESS	RX	G13
	RESPONSE INDICATOR	0	None	NA	NA	NA	
	FIX OR BEARING DESCRIPTOR	0	None	NA	NA	NA	1
	SECOND	0	None	NA	NA	NA	
	MINUTE	AT	CR	M.85	SWITCH TIME SWITCH MINUTES	1 RX RX	2
	HOUR	AT	CR	M.85	SWITCH TIME SWITCH HOURS	1 RX RX	3
	IDENTITY DIFFERENCE INDICATOR	0	None	NA	NA	NA	
	SQUARE/CIRCLE SWITCH	0	None	NA	NA	NA	
	IDENTITY	0	None	NA	NA	NA	

TABLE C.5.2-J3.7-1. J3.7 Message Data Element Translation from the M.5/M.85 Message (Sheet 2 of 4)

WORD J3.7I (Cont'd)	Link 16		TRANSLATION		Link 11/11B		
	DATA ELEMENT IDENTITY AMPLIFYING DESCRIPTOR	VALUE NA	REQUIRED None	MESSAGE NA	FIELD NA	VALUE NA	NOTES
J3.7C1	NOT TRANSLATED						
J3.7C2	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	2	None	NA	NA	NA	
	LATITUDE, 0.0051 MINUTE	AT	CR	M.5	SCALE INDICATOR X COORDINATE Y COORDINATE	RX RX RX	G9
	LONGITUDE, 0.0051 MINUTE	AT	CR	M.5	SCALE INDICATOR X COORDINATE Y COORDINATE	RX RX RX	G9
	AREA MAJOR AXIS	63	None	NA	NA	NA	
	AREA MINOR AXIS	63	None	NA	NA	NA	
	AXIS ORIENTATION	255	None	NA	NA	NA	
J3.7C3	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	3	None	NA	NA	NA	
	COURSE	AT	CR	M.85	SWITCH X DOT Y DOT	0 RX RX	G8
	SPEED	AT	CR	M.85	SWITCH X DOT Y DOT	0 RX RX	G8
	ALTITUDE, 25 FT	AT	CR	M.85	SWITCH HEIGHT/DEPTH SWITCH HEIGHT/DEPTH	1 0 RX	G10
	EMITTER NUMBER INDICATOR	0	None	NA	NA	NA	
	EMITTER NUMBER	0	None	NA	NA	NA	

C-430

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J3.7-1. J3.7 Message Data Element Translation from the M.5/M.85 Message (Sheet 3 of 4)

Link 16			Link 11/11B		
WORD	DATA ELEMENT	TRANSLATION	FIELD	VALUE	NOTES
J3.7C3 (Cont'd)	WARTIME RESERVE MODE INDICATOR	VALUE 0NoneMESSAGE NA	NA	NA	
	EMITTER CONFIDENCE	0NoneNA	NA	NA	
J3.7C4	NOT TRANSLATED				
J3.7C5	NOT TRANSLATED				

APPENDIX C

TABLE C.5.2-J3.7-1. J3.7 Message Data Element Translation from the M.5/M.85 Message (Sheet 4 of 4)

NOTES

1. The J3.7 message is only translated from an M.5 message when Point = 0.
2. When the M.85 Switch = 0, the J3.7I Minute field is transmitted as No Statement. When Switch = 1, the J3.7I Minute field is determined from the M.85 Time Switch and Minutes fields as follows:

Link 16	Link 11/11B	
MINUTE	TIME SWITCH	MINUTES
0-59 - 0 THROUGH 59	1	0-59 - 0 THROUGH 59
63 - NO STATEMENT	0	MINUTES ANY

3. When the M.85 Switch = 0, the J3.7I Hour field is forwarded as No Statement. When Switch = 1, the J3.7I Hour field is determined from the M.85 Time Switch and Hours fields as follows:

Link 16	Link 11/11B	
HOUR	TIME SWITCH	HOURS
0-23 (0-23 HOURS)	1	0-23 - 0 THROUGH 23
31 - NO STATEMENT	0	HOURS ANY

TABLE C.5.2-J3.7-2. J3.7 Message Data Element Translation from the M.6A Message (Sheet 1 of 5)

Link 16					Link 11/11B		
<u>WORD</u> J3.7I	<u>DATA ELEMENT</u> WORD FORMAT	<u>TRANSLATION</u>			<u>FIELD</u> NA	<u>VALUE</u> NA	<u>NOTES</u>
		<u>VALUE</u> 0	<u>REQUIRED</u> None	<u>MESSAGE</u> NA			
	LABEL, J-SERIES	3	CR	M.6A	LABEL	6	
	SUBLABEL, J-SERIES	7	CR	M.6A	SUB LABEL	0	
	MESSAGE LENGTH INDICATOR	AR	None	NA	NA	NA	G3
	EXERCISE INDICATOR	0	None	NA	NA	NA	
	FORCE TELL INDICATOR	AT	CR	M.9A(AC=5 OR 7)	STATUS INDICATOR	1	G4
	EMERGENCY INDICATOR	AT	CR	M.9A(AC=5 OR 7)	STATUS INDICATOR	0	G4
	SPECIAL PROCESSING INDICATOR	RX	=	M.1 or M.9A(AC=0)	SPECIAL PROCESSING INDICATOR	RX	G5
	SIMULATION INDICATOR	RX	=	M.9A(AC=0)	SIMULATION INDICATOR	RX	G6
	TRACK NUMBER, REFERENCE	AT	CR	M.6A	TRACK NUMBER	RX	G13
	RESPONSE INDICATOR	0	None	NA	NA	NA	
	FIX OR BEARING DESCRIPTOR	4	None	NA	NA	NA	1
	SECOND	AT	CR	M.6A	ACTION VALUE TIME STALE	1 RX	3
	MINUTE	AT	CR	M.6A	ACTION VALUE TIME STALE	1 RX	3
	HOURL	AT	CR	M.6A	ACTION VALUE TIME STALE	1 RX	3
	IDENTITY DIFFERENCE INDICATOR	0	None	NA	NA	NA	
	SQUARE/CIRCLE SWITCH	0	None	NA	NA	NA	
	IDENTITY	AT	CR	M.6A	ACTION VALUE THREAT EVALUATION	1 RX	2

TABLE C.5.2-J3.7-2. J3.7 Message Data Element Translation from the M.6A Message (Sheet 2 of 5)

WORD J3.7I (Cont'd)	Link 16		TRANSLATION		Link 11/11B		
	DATA ELEMENT IDENTITY AMPLIFYING DESCRIPTOR	VALUE NA	REQUIRED None	MESSAGE NA	FIELD NA	VALUE NA	NOTES
J3.7C1	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	1	None	NA	NA	NA	
	BEARING ORIGIN	0	None	NA	NA	NA	4
	BEARING	RX	=	M.6A	ACTION VALUE BEARING	0 RX	
	TRACK NUMBER, ORIGIN	AT	CR	M.6A	ACTION VALUE TN OF ORIGIN	0 RX	G13
	BEARING ACCURACY	AT	CR	M.6A	ACTION VALUE BEARING ACCURACY	0 RX	5
	ELEVATION ANGLE	RX	=	M.6A	ACTION VALUE SWITCH ELEVATION	1 1 RX	6
	PLATFORM EVALUATION CONFIDENCE	0	None	NA	NA	NA	
	IDENTITY CONFIDENCE	0	None	NA	NA	NA	
	ENVIRONMENT/CATEGORY	AT	CR	M.6A	ACTION VALUE PLATFORM	1 RX	7
J3.7C2	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	2	None	NA	NA	NA	
	LATITUDE, 0.0051 MINUTE	AT	CR	(See Note 8)	NA	NA	8, G9
	LONGITUDE, 0.0051 MINUTE	AT	CR	(See Note 8)	NA	NA	8, G9
	AREA MAJOR AXIS	63	None	NA	NA	NA	
	AREA MINOR AXIS	63	None	NA	NA	NA	
	AXIS ORIENTATION	255	None	NA	NA	NA	

C-434

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J3.7-2. J3.7 Message Data Element Translation from the M.6A Message (Sheet 3 of 5)

<u>WORD</u>	Link 16		TRANSLATION		Link 11/11B		
	<u>DATA ELEMENT</u>	<u>VALUE</u>	<u>REQUIRED</u>	<u>MESSAGE</u>	<u>FIELD</u>	<u>VALUE</u>	<u>NOTES</u>
J3.7C3	NOT TRANSLATED						
J3.7C4	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	4	None	NA	NA	NA	
	PLATFORM	AT	CR	M.6A	PLATFORM	RX	7
	MODE NUMBER	0	None	NA	NA	NA	
	FREQUENCY/FREQUENCY RANGE INDICATOR	1	None	NA	NA	NA	
	FREQUENCY MULTIPLIER, 1	AT	CR	M.6A	ACTION VALUE SWITCH FREQUENCY	1 0 RX	G19
	FREQUENCY, 1	AT	CR	M.6A	ACTION VALUE SWITCH FREQUENCY	1 0 RX	G19
	FREQUENCY MULTIPLIER, 2	AT	CR	M.6A	ACTION VALUE SWITCH FREQUENCY	1 0 RX	G19
	FREQUENCY, 2	AT	CR	M.6A	ACTION VALUE SWITCH FREQUENCY	1 0 RX	G19
J3.7C5	NOT TRANSLATED						

C-435

APPENDIX C

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-J3.7-2. J3.7 Message Data Element Translation from the M.6A Message (Sheet 4 of 5)

NOTES

1. The M.6A only describes EA LOBs. Therefore, Fix or Bearing Descriptor is always set to 4 (Bearing EA).

2. Identity is determined from the M.6A Threat Evaluation field as follows:

Link 16	Link 11/11B
IDENTITY	THREAT EVALUATION
0 - PENDING	0 - PENDING
1 - UNKNOWN	1 - UNKNOWN
3 - FRIEND	2 - NONTHREAT/FRIEND
5 - SUSPECT	3 - THREAT

3. Hour, Minute, and Second are determined from the M.6A Time Stale field by subtracting the value in the Time Stale field from the estimated time of transmission of the J3.7 message, rounding to the nearest second. Time Stale = 127, No Statement, shall be translated to Hour = 31, No Statement, Minute = 63, No Statement, and Second = 63, No Statement.

4. The M.6A message only describes EA LOBs relative to a TN of Origin. Therefore, Bearing Origin in the J3.7 message is set to 0.

5. Bearing Accuracy is determined as follows:

Link 16	Link 11/11B
BEARING ACCURACY (NO STATEMENT)	BEARING ACCURACY
0(NO STATEMENT)	3(> = 5 DEGREES/NO STATEMENT)
3(<= 5.0 DEGREES)	2(< 5 DEGREES)
6(<= 2.0 DEGREES)	1(< 2 DEGREES)
7(<= 1.0 DEGREES)	0(< 1 DEGREE)

6. When Action Value = 1 and Switch = 1, the M.6A Elevation equates to the J3.7 Elevation Angle, except that M.6A Elevation = 512 shall be converted to J3.7 Elevation Angle = 511, because J3.7 Elevation Angle = 512 means No Statement, but M.6A Elevation = 512 means $\pi/2$.

APPENDIX C

TABLE C.5.2-J3.7-2. J3.7 Message Data Element Translation from the M.6A Message (Sheet 5 of 5)

NOTES (Continued)

7. The J3.7 Environment/Category (E/C) and Platform fields are determined from the M.6A Platform field as follows:

Link 16		Link 11/11B
ENVIRONMENT/CATEGORY	PLATFORM TYPE	PLATFORM
0 - NO STATEMENT/ UNKNOWN	0 - NO STATEMENT	0 - NO STATEMENT
ENVIRONMENT/CATEGORY	AIR PLATFORM	PLATFORM
2 - AIR	0 - NO STATEMENT	2 - AIRBORNE (AIRCRAFT EXCLUDING MISSILE)
	13 - MISSILE	1 - MISSILE
	36 - MISSILE CONTROL UNIT	6 - MISSILE CONTROL UNIT (AIRBORNE)
ENVIRONMENT/CATEGORY	SURFACE (MARITIME) PLATFORM	PLATFORM
3 - SURFACE (MARITIME)	0 - NO STATEMENT	3 - SURFACE
	33 - MISSILE CONTROL UNIT	7 - MISSILE CONTROL UNIT (SURFACE/ SUBSURFACE)
ENVIRONMENT/CATEGORY	SUBSURFACE (MARITIME) PLATFORM	PLATFORM
4 - SUBSURFACE (MARITIME)	0 - NO STATEMENT	4 - SUBSURFACE (SUBMARINE)
ENVIRONMENT/CATEGORY	LAND (GROUND) PLATFORM	PLATFORM
5 - LAND (GROUND)	0 - NO STATEMENT	5 - LAND

8. If the position of the M.6A TN of Origin is held by the FJU, the position may be translated and forwarded as Latitude and Longitude in the J3.7C2 word. (This position may be obtained from a previously reported M.1, M.2, M.3, M.4, and/or M.5 message.) Otherwise, Latitude and Longitude shall be forwarded as No Statement.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-J3.7-3. J3.7 Message Data Element Translation from the M.6B/M.86B Message (Sheet 1 of 7)

Link 16					Link 11/11B		
WORD J3.7I	DATA ELEMENT WORD FORMAT	TRANSLATION			FIELD NA	VALUE NA	NOTES
		VALUE 0	REQUIRED None	MESSAGE NA			
	LABEL, J-SERIES	3	CR	M.6B	LABEL	6	
	SUBLABEL, J-SERIES	7	CR	M.6B	SUB LABEL	1	
	MESSAGE LENGTH INDICATOR	AR	None	NA	NA	NA	G3
	EXERCISE INDICATOR	0	None	NA	NA	NA	
	FORCE TELL INDICATOR	AT	CR	M.9A(AC=5 OR 7)	STATUS INDICATOR	1	G4
	EMERGENCY INDICATOR	AT	CR	M.9A(AC=5 OR 7)	STATUS INDICATOR	0	G4
	SPECIAL PROCESSING INDICATOR	RX	=	M.1 or M.9A(AC=0)	SPECIAL PROCESSING INDICATOR	RX	G5
	SIMULATION INDICATOR	RX	=	M.9A(AC=0)	SIMULATION INDICATOR	RX	G6
	TRACK NUMBER, REFERENCE	AT	CR	M.6B	TRACK NUMBER	RX	G13
	RESPONSE INDICATOR	0	None	NA	NA	NA	
	FIX OR BEARING DESCRIPTOR	AT	CR	M.6B M.86B	FIX OR BEARING REPORT SOURCE BEARING INDICATOR	RX RX RX	1
	SECOND	0	None	NA	NA	NA	
	MINUTE	AT	CR	M.86B	TIME STALE	RX	2
	HOURL	AT	CR	M.86B	TIME STALE	RX	2
	IDENTITY DIFFERENCE INDICATOR	0	None	NA	NA	NA	
	SQUARE/CIRCLE SWITCH	0	None	NA	NA	NA	
	IDENTITY	AT	CR	M.6B	THREAT EVALUATION	RX	3
	IDENTITY AMPLIFYING DESCRIPTOR	NA	None	NA	NA	NA	

TABLE C.5.2-J3.7-3. J3.7 Message Data Element Translation from the M.6B/M.86B Message (Sheet 2 of 7)

Link 16					Link 11/11B		
WORD	DATA ELEMENT	VALUE	TRANSLATION REQUIRED	MESSAGE	FIELD	VALUE	NOTES
J3.7C1	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	1	None	NA	NA	NA	
	BEARING ORIGIN	1	None	NA	NA	NA	
	BEARING	AT	CR	M.86B	BEARING INDICATOR BEARING	0 RX	4
	TRACK NUMBER, ORIGIN	0	None	NA	NA	NA	
	BEARING ACCURACY	AT	CR	M.86B	BEARING ACCURACY	RX	5
	ELEVATION ANGLE	512	None	NA	NA	NA	
	PLATFORM EVALUATION CONFIDENCE	RX	=	M.86B	REPORT SOURCE PLATFORM EVALUATION CONFIDENCE	1 RX	6
	IDENTITY CONFIDENCE	0	None	NA	NA	NA	
	ENVIRONMENT/CATEGORY	AT	CR	M.6B	PLATFORM	RX	7
J3.7C2	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	2	None	NA	NA	NA	
	LATITUDE, 0.0051 MINUTE	AT	CR	M.6B	X COORDINATE Y COORDINATE	RX RX	G9
	LONGITUDE, 0.0051 MINUTE	AT	CR	M.6B	X COORDINATE Y COORDINATE	RX RX	G9
	AREA MAJOR AXIS	63	None	NA	NA	NA	
	AREA MINOR AXIS	63	None	NA	NA	NA	
	AXIS ORIENTATION	255	None	NA	NA	NA	
J3.7C3	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	3	None	NA	NA	NA	

C-440

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J3.7-3. J3.7 Message Data Element Translation from the M.6B/M.86B Message (Sheet 3 of 7)

WORD J3.7C3 (Cont'd)	Link 16	TRANSLATION			Link 11/11B	VALUE	NOTES
	DATA ELEMENT COURSE	VALUE 511	REQUIRED None	MESSAGE NA	FIELD NA		
C-441	SPEED	2047	None	NA	NA	NA	
	ALTITUDE, 25 FT	8191	None	NA	NA	NA	
	EMITTER NUMBER INDICATOR	1	CR	M.86B	EVALUATION SWITCH	1	
	EMITTER NUMBER	RX	=	M.86B	EVALUATION SWITCH EMITTER NUMBER	1 RX	G15
	WARTIME RESERVE MODE INDICATOR	0	None	NA	NA	NA	
	EMITTER CONFIDENCE	RX	=	M.86B	EVALUATION SWITCH CONFIDENCE	1 RX	
	J3.7C4 WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	4	None	NA	NA	NA	
	PLATFORM	AT	CR	M.6B	PLATFORM	RX	7
	MODE NUMBER	RX	=	M.86B	EVALUATION SWITCH MODE NUMBER	1 RX	
	FREQUENCY/FREQUENCY RANGE INDICATOR	AT	CR	M.86B	EVALUATION SWITCH FREQUENCY MULTIPLIER	0 RX	G19
	FREQUENCY MULTIPLIER, 1	AT	CR	M.86B	EVALUATION SWITCH FREQUENCY MULTIPLIER	0 RX	G19
	FREQUENCY, 1	AT	CR	M.86B	EVALUATION SWITCH FREQUENCY/FREQUENCY RANGE	0 RX	G19
	FREQUENCY MULTIPLIER, 2	AT	CR	M.86B	EVALUATION SWITCH FREQUENCY MULTIPLIER	0 RX	G19
	FREQUENCY, 2	AT	CR	M.86B	EVALUATION SWITCH FREQUENCY/FREQUENCY RANGE	0 RX	G19

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J3.7-3. J3.7 Message Data Element Translation from the M.6B/M.86B Message (Sheet 4 of 7)

Link 16		Link 11/11B		
<u>WORD</u>	<u>DATA ELEMENT</u>	<u>TRANSLATION</u>		
<u>J3.7C5</u>	<u>NOT TRANSLATED</u>	<u>VALUE</u>	<u>REQUIRED</u>	<u>MESSAGE</u>
		<u>FIELD</u>	<u>VALUE</u>	<u>NOTES</u>

APPENDIX C

TABLE C.5.2-J3.7-3. J3.7 Message Data Element Translation from the M.6B/M.86B Message (Sheet 5 of 7)

NOTES

1. Fix or Bearing Descriptor is determined from the M.6B Fix or Bearing (F/B), M.86B Report Source (RS), and the M.86B Bearing Indicator fields, as follows:

Link 16	Link 11/11B		
FIX OR BEARING DESCRIPTOR	FIX OR BEARING	REPORT SOURCE	BEARING INDICATOR
0 - EW FIX	1 - FIX	0 - ES (OTHER THAN RDF)	0 OR 1
3 - BEARING, ES	0 - BEARING	0 - ES (OTHER THAN RDF)	0 - BEARING
5 - BEARING, RADIO DIRECTION FINDING	0 - BEARING	1 - RDF	NA
7 - BEARING, UNKNOWN	0 - BEARING	0 - ES (OTHER THAN RDF)	1 - BEARING UNKNOWN

(Note: An M.6B/M.86B with F/B = 1 and RS = 1 is illegal. Also, when M.86B RS = 1, the M.86B has no Bearing Indicator field.)

2. Hour and Minute are determined from the M.86B Time Stale field by subtracting the value in the Time Stale field from the estimated time of transmission of the J3.7 message, rounding to the nearest whole minute. This procedure will be used when Time Stale = 30, even though 30 is defined as 30 minutes or more. Time Stale = 31, Nonreal-Time Fix or Bearing, shall be translated to Hour = 31, No Statement, and Minute = 63, No Statement.

3. The Identity field is determined from the M.6B Threat Evaluation field as follows:

Link 16	Link 11/11B
IDENTITY	THREAT EVALUATION
0 - PENDING	0 - PENDING
1 - UNKNOWN	1 - UNKNOWN
2 - ASSUMED FRIEND	2 - NONTHREAT/FRIEND
5 - SUSPECT	3 - THREAT

APPENDIX C

TABLE C.5.2-J3.7-3. J3.7 Message Data Element Translation from the M.6B/M.86B Message (Sheet 6 of 7)

NOTES (Continued)

4. Link 11/11B Bearing is in 360/512 degree increments, and Link 16 Bearing is in 360/4096 degree increments. Translate Link 11/11B to the nearest Link 16 increment (.5 rounded up).

5. Bearing Accuracy is determined as follows:

<u>Link 16</u>	<u>Link 11/11B</u>
<u>BEARING ACCURACY (NO STATEMENT)</u>	<u>BEARING ACCURACY</u>
0(NO STATEMENT)	0(NO STATEMENT)
1(> 10.0 DEGREES)	3(= OR > 10 DEGREES)
2(<= 10.0 DEGREES)	2(< 10 DEGREES)
6(<= 2.0 DEGREES)	1(< 2 DEGREES)

6. If Report Source is equal to 0, Platform Evaluation Confidence will be transmitted as value 0.

7. The J3.7 Environment/Category (E/C) and Platform fields are determined from the M.6B Platform field as follows:

<u>Link 16</u>		<u>Link 11/11B</u>
<u>ENVIRONMENT/CATEGORY</u>	<u>PLATFORM TYPE</u>	<u>PLATFORM</u>
0 - NO STATEMENT/ UNKNOWN	0 - NO STATEMENT	0 - NO STATEMENT
<u>ENVIRONMENT/CATEGORY</u>	<u>AIR PLATFORM</u>	<u>PLATFORM</u>
2 - AIR	0 - NO STATEMENT	2 - AIRBORNE (AIRCRAFT EXCLUDING MISSILE)
	13 - MISSILE	1 - MISSILE
	36 - MISSILE CONTROL UNIT	6 - MISSILE CONTROL UNIT (AIRBORNE)
<u>ENVIRONMENT/CATEGORY</u>	<u>SURFACE (MARITIME) PLATFORM</u>	<u>PLATFORM</u>
3 - SURFACE (MARITIME)	0 - NO STATEMENT	3 - SURFACE
	33 - MISSILE CONTROL UNIT	7 - MISSILE CONTROL UNIT (SURFACE/ SUBSURFACE)

APPENDIX C

TABLE C.5.2-J3.7-3. J3.7 Message Data Element Translation from the
M.6B/M.86B Message (Sheet 7 of 7)

NOTES (Continued)

7. (Continued)

<u>Link 16</u>		<u>Link 11/11B</u>
<u>ENVIRONMENT/CATEGORY</u>	<u>SUBSURFACE (MARITIME) PLATFORM</u>	<u>PLATFORM</u>
4 - SUBSURFACE (MARITIME)	0 - NO STATEMENT	4 - SUBSURFACE (SUBMARINE)
<u>ENVIRONMENT/CATEGORY</u>	<u>LAND (GROUND) PLATFORM</u>	<u>PLATFORM</u>
5 - LAND (GROUND)	0 - NO STATEMENT	5 - LAND

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-J3.7-4. J3.7 Message Data Element Translation from the M.9F(0)/M.89F(0) Message (Sheet 1 of 4)

Link 16					Link 11/11B		
<u>WORD</u> J3.7I	<u>DATA ELEMENT</u> <u>WORD FORMAT</u>	<u>VALUE</u> 0	<u>TRANSLATION</u>		<u>FIELD</u> NA	<u>VALUE</u> NA	<u>NOTES</u>
			<u>REQUIRED</u>	<u>MESSAGE</u>			
	LABEL, J-SERIES	3	CR	M.9F(0)	LABEL	9	
	SUBLABEL, J-SERIES	7	CR	M.9F(0)	SUBLABEL	5	
	MESSAGE LENGTH INDICATOR	AR	None	NA	NA	NA	G3
	EXERCISE INDICATOR	0	None	NA	NA	NA	
	FORCE TELL INDICATOR	AT	CR	M.9A(AC=5 OR 7)	STATUS INDICATOR	1	G4
	EMERGENCY INDICATOR	AT	CR	M.9A(AC=5 OR 7)	STATUS INDICATOR	0	G4
	SPECIAL PROCESSING INDICATOR	RX	=	M.1 or M.9A(AC=0)	SPECIAL PROCESSING INDICATOR	RX	G5
	SIMULATION INDICATOR	RX	=	M.9A(AC=0)	SIMULATION INDICATOR	RX	G6
	TRACK NUMBER, REFERENCE	AT	CR	M.9F(0)	TRACK NUMBER	RX	G13
	RESPONSE INDICATOR	0	None	NA	NA	NA	
	FIX OR BEARING DESCRIPTOR	1	CR	M.89F(0)	SOURCE	1 or 2	
	SECOND	0	None	NA	NA	NA	
	MINUTE	RX	=	M.89F(0)	MINUTES	RX	
	HOUR	RX	=	M.89F(0)	HOURS	RX	
	IDENTITY DIFFERENCE INDICATOR	0	None	NA	NA	NA	
	SQUARE/CIRCLE SWITCH	AT	CR	M.89F(0)	SQUARE/CIRCLE SWITCH	RX	1
	IDENTITY	0	None	NA	NA	NA	2
	IDENTITY AMPLIFYING DESCRIPTOR	NA	None	NA	NA	NA	

C-447

MIL-STD-6016B
APPENDIX C

TABLE C.5.2-J3.7-4. J3.7 Message Data Element Translation from the M.9F(0)/M.89F(0) Message (Sheet 2 of 4)

Link 16					Link 11/11B		
WORD	DATA ELEMENT	VALUE	TRANSLATION REQUIRED	MESSAGE	FIELD	VALUE	NOTES
J3.7C1	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	1	None	NA	NA	NA	
	BEARING ORIGIN	0	None	NA	NA	NA	
	BEARING	0	None	NA	NA	NA	
	TRACK NUMBER, ORIGIN	0	None	NA	NA	NA	
	BEARING ACCURACY	0	None	NA	NA	NA	
	ELEVATION ANGLE	512	None	NA	NA	NA	
	PLATFORM EVALUATION CONFIDENCE	0	None	NA	NA	NA	
	IDENTITY CONFIDENCE	0	None	NA	NA	NA	
	ENVIRONMENT/CATEGORY	AT	CR	M.89F(0)	CATEGORY/PLATFORM	RX	3
J3.7C2	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	2	None	NA	NA	NA	
	LATITUDE, 0.0051 MINUTE	AT	CR	M.9F(0)	X COORDINATE Y COORDINATE	RX RX	G9
	LONGITUDE, 0.0051 MINUTE	AT	CR	M.9F(0)	X COORDINATE Y COORDINATE	RX RX	G9
	AREA MAJOR AXIS	AT	CR	M.89F(0)	MAJOR AXIS	RX	G18
	AREA MINOR AXIS	AT	CR	M.89F(0)	MINOR AXIS	RX	G18
	AXIS ORIENTATION	AT	CR	M.89F(0)	BEARING	RX	G17
J3.7C3	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	3	None	NA	NA	NA	

C-448

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J3.7-4. J3.7 Message Data Element Translation from the M.9F(0)/M.89F(0) Message (Sheet 3 of 4)

WORD	Link 16		TRANSLATION		Link 11/11B		NOTES
	DATA ELEMENT	VALUE	REQUIRED	MESSAGE	FIELD	VALUE	
J3.7C3 (Cont'd)	COURSE	AT	CR	M.9F(1)	SWITCH SCALE INDICATOR X DOT Y DOT	0 RX RX RX	G8
	SPEED	AT	CR	M.9F(1)	SWITCH SCALE INDICATOR X DOT Y DOT	0 RX RX RX	G8
	ALTITUDE, 25 FT	8191	None	NA	NA	NA	
	EMITTER NUMBER INDICATOR	0	None	NA	NA	NA	
	EMITTER NUMBER	0	None	NA	NA	NA	
	WARTIME RESERVE MODE INDICATOR	0	None	NA	NA	NA	
	EMITTER CONFIDENCE	0	None	NA	NA	NA	
J3.7C4	NOT TRANSLATED						
J3.7C5	NOT TRANSLATED						

C-449

MIL-STD-6016B
APPENDIX C

APPENDIX C

TABLE C.5.2-J3.7-4. J3.7 Message Data Element Translation from the
M.9F(0)/M.89F(0) Message (Sheet 4 of 4)

NOTES

1. The Square/Circle Switch is determined as follows:

Link 16	Link 11/11B
SQUARE/CIRCLE SWITCH	SQUARE/CIRCLE SWITCH
1 - SQUARE/RECTANGULAR	0 - SQUARE/RECTANGLE
2 - CIRCULAR/ELLIPTICAL	1 - CIRCLE/ELLIPSE

2. Identity is not contained in the M.9F/M.89F message. Therefore, Identity in the J3.7I word shall be set to 0 (Pending).

3. Environment/Category is determined from M.89F(AC=0) Category/Platform field as follows:

Link 16	Link 11/11B
ENVIRONMENT/CATEGORY	CATEGORY/PLATFORM
0 - NO STATEMENT/UNKNOWN	0 - NO STATEMENT
2 - AIR	1 - AIR
3 - SURFACE (MARITIME)	2 - SURFACE
4 - SUBSURFACE (MARITIME)	3 - SUBSURFACE

TABLE C.5.2-J5.4-1. J5.4 Message Data Element Translation from the M.4C/M.84C Message (Sheet 1 of 5)

<u>WORD</u> J5.4I	<u>DATA ELEMENT</u> WORD FORMAT	<u>TRANSLATION</u>			<u>Link 11/11B</u>		
		<u>VALUE</u> 0	<u>REQUIRED</u> None	<u>MESSAGE</u> NA	<u>FIELD</u> NA	<u>VALUE</u> NA	<u>NOTES</u>
	LABEL, J-SERIES	5	CR	M.4C	LABEL	4	1
	SUBLABEL, J-SERIES	4	CR	M.4C	SUB LABEL	2	1
	MESSAGE LENGTH INDICATOR	AR	None	NA	NA	NA	G3
	EXERCISE INDICATOR	0	None	NA	NA	NA	
	PPLI TRACK NUMBER AND IDENTITY INDICATOR	0	None	NA	NA	NA	
	FORCE TELL INDICATOR	AT	CR	M.9A(AC=5 OR 7)	STATUS INDICATOR	1	G4
	EMERGENCY INDICATOR	AT	CR	M.9A(AC=5 OR 7)	STATUS INDICATOR	0	G4
	SPECIAL PROCESSING INDICATOR	RX	=	M.1	SPECIAL PROCESSING INDICATOR	RX	G5
	SIMULATION INDICATOR	RX	=	M.9A(AC=0)	SIMULATION INDICATOR	RX	G6
	TRACK NUMBER, REFERENCE	AT	CR	M.4C	TRACK NUMBER	RX	G13
	IDENTITY	AT	CR	M.4C	IDENTITY	RX	2
	IDENTITY AMPLIFYING DESCRIPTOR	NA	None	NA	NA	NA	
	CONFIDENCE LEVEL	0	None	NA	NA	NA	
	SUBSURFACE (MARITIME) PLATFORM	0	None	NA	NA	NA	
	MINUTE	AT	CR	M.4B	MINUTES TIME SWITCH	RX RX	3
	HOURL	AT	CR	M.4B	HOURS TIME SWITCH	RX RX	3
	BEARING DRIFT	0	None	NA	NA	NA	
	AUDIO	0	None	NA	NA	NA	

C-451

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J5.4-1. J5.4 Message Data Element Translation from the M.4C/M.84C Message (Sheet 2 of 5)

Link 16				Link 11/11B			
WORD	DATA ELEMENT	VALUE	TRANSLATION REQUIRED	MESSAGE	FIELD	VALUE	NOTES
J5.4I (Cont'd)	DOPPLER	0	None	NA	NA	NA	
J5.4E0	WORD FORMAT	2	None	NA	NA	NA	
	LATITUDE, 0.0051 MINUTE	AT	CR	M.4C	SCALE INDICATOR X COORDINATE Y COORDINATE	RX RX RX	G9
	LONGITUDE, 0.0051 MINUTE	AT	CR	M.4C	SCALE INDICATOR X COORDINATE Y COORDINATE	RX RX RX	G9
	BEARING REPORT TYPE	AT	CR	M.4C M.84C	SWITCH BEARING	0 RX	1,4
	FREQUENCY, SOURCE ACOUSTIC	AT	CR	M.84C	MAIN RATE FREQUENCY	RX	5
	BEARING 1, ASW	AT	CR	M.4C M.84C	SWITCH BEARING	0 RX	1,4
J5.4C1	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	1	None	NA	NA	NA	
	FREQUENCY, ASSOCIATED ACOUSTIC 1	0	None	NA	NA	NA	
	FREQUENCY, ASSOCIATED ACOUSTIC 2	0	None	NA	NA	NA	
	BEARING 2, ASW	0	None	NA	NA	NA	6
	BROADBAND	0	None	NA	NA	NA	
	RANGE ACCURACY, ASW	0	None	NA	NA	NA	
	RANGE	AT	CR	M.4C M.84C	SWITCH RANGE	0 RX	1,7
	SENSOR INDICATOR	0	None	NA	NA	NA	
	BEARING ACCURACY, ASW	AT	CR	M.84C	BEARING ACCURACY	RX	8

C-452

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J5.4-1. J5.4 Message Data Element Translation from the M.4C/M.84C Message (Sheet 3 of 5)

Link 16		Link 11/11B		
<u>WORD</u>	<u>DATA ELEMENT</u>	<u>TRANSLATION</u>		
<u>J5.4C2</u>	<u>NOT TRANSLATED</u>	<u>VALUE</u>	<u>REQUIRED</u>	<u>MESSAGE</u>
		<u>FIELD</u>	<u>VALUE</u>	<u>NOTES</u>

APPENDIX C

TABLE C.5.2-J5.4-1. J5.4 Message Data Element Translation from the M.4C/M.84C Message (Sheet 4 of 5)

NOTES

1. The J5.4 message is only translated from an M.4C when Switch value is 0 (Bearing and/or Range). When the M.4C Switch value is 2 or 3, the J3.0 message is forwarded.

2. The Identity field is determined as follows:

Link 16	Link 11
IDENTITY	IDENTITY
0 - PENDING	0 - NO STATEMENT/PENDING
1 - UNKNOWN	3 - UNKNOWN
3 - FRIEND	1 - FRIEND
6 - HOSTILE	2 - HOSTILE

3. If M.4B Time Switch = 1, J5.4I Minute and Hour equate to M.4B Minutes and Hours, respectively. Otherwise, J5.4I Minute and Hour shall be set to No Statement.

4. The J5.4 Bearing Report Type (BRT) and Bearing 1, ASW fields are determined from the M.84C Bearing field as follows:

Link 16	Link 11/11B
BEARING REPORT TYPE	BEARING
0	0-254(0 THROUGH 357 48/256 DEGREES)
3	255(NO STATEMENT/ UNKNOWN)

5. The Frequency, Source Acoustic (FSA) is translated from the middle frequency of the frequency range reported in the M.84C Main Rate Frequency (MRF) field. For example, the M.84C value 2 ($100 < F < 200$ HZ) equates to the J5.4 value 1200 (150 HZ). This is derived by the following formula:

The value of the FSA = the value of the (MRF X 800) - 400. For example, 1200 = (2 X 800) - 400 for the M.84C value 2 ($100 < F < 200$ HZ).

MRF = 0 and 26-31 shall be translated to FSA = 0.

APPENDIX C

TABLE C.5.2-J5.4-1. J5.4 Message Data Element Translation from the M.4C/M.84C Message (Sheet 5 of 5)

NOTES (Continued)

6. Ambiguous bearings are not reported in the M.4C/M.84C/M.4B Bearing message. Therefore, the Bearing 2, ASW field shall be set to 0 (0 Degrees) for transmission.

7. The conversion of Range between Link 16 and Link 11 is as follows:

Link 16	Link 11/11B
RANGE	RANGE
0 - NO STATEMENT/UNKNOWN	0 - NO STATEMENT/UNKNOWN
1-524 (250-131,000 Yds)	1-8, 191 (16-131,056 Yds)

Link 16 Range is in 250 yard increments, and Link 11 range is in 16 yard increments. Link 11 Range of 16 to 112 shall translate to 250 yards in Link 16. All other Link 11 Ranges shall be translated to the nearest Link 16 250 yard increment.

8. The J5.4C1 Bearing Accuracy, ASW field is determined from the M.84C Bearing Accuracy field as follows:

Link 16	Link 11/11B
BEARING ACCURACY, ASW (NO STATEMENT)	BEARING ACCURACY
0(NO STATEMENT)	0(NO STATEMENT)
1(+ OR - 2 DEGREES)	1(< = 2 DEGREES)
2(+ OR - 5 DEGREES)	2(< = 5 DEGREES)
3(+ OR - 10 DEGREES)	3(< = 10 DEGREES)
4(+ OR - 15 DEGREES)	4(< = 15 DEGREES)
5(+ OR - 20 DEGREES)	5(< = 20 DEGREES)
6(+ OR - 30 DEGREES)	6(< = 30 DEGREES)
8(OVER 45 DEGREES)	7(OVER 30 DEGREES)

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-J5.4-2. J5.4 Message Data Element Translation from the M.4D/M.84D Message (Sheet 1 of 7)

Link 16					Link 11/11B		
<u>WORD</u> J5.4I	<u>DATA ELEMENT</u> WORD FORMAT	<u>VALUE</u> 0	<u>TRANSLATION</u>		<u>FIELD</u> NA	<u>VALUE</u> NA	<u>NOTES</u>
			<u>REQUIRED</u>	<u>MESSAGE</u>			
	LABEL, J-SERIES	5	CR	M.4D	LABEL	4	
	SUBLABEL, J-SERIES	4	CR	M.4D	SUB LABEL	3	
	MESSAGE LENGTH INDICATOR	AR	None	NA	NA	NA	G3
	EXERCISE INDICATOR	0	None	NA	NA	NA	
	PPLI TRACK NUMBER AND IDENTITY INDICATOR	0	None	NA	NA	NA	
	FORCE TELL INDICATOR	AT	CR	M.9A(AC=5 OR 7)	STATUS INDICATOR	1	G4
	EMERGENCY INDICATOR	AT	CR	M.9A(AC=5 OR 7)	STATUS INDICATOR	0	G4
	SPECIAL PROCESSING INDICATOR	RX	=	M.1	SPECIAL PROCESSING INDICATOR	RX	G5
	SIMULATION INDICATOR	RX	=	M.9A(AC=0)	SIMULATION INDICATOR	RX	G6
	TRACK NUMBER, REFERENCE	AT	CR	M.4D	TRACK NUMBER	RX	G13
	IDENTITY	AT	CR	M.4D	IDENTITY	RX	1
	IDENTITY AMPLIFYING DESCRIPTOR	NA	None	NA	NA	NA	
	CONFIDENCE LEVEL	AT	CR	M.84D	SWITCH CLASSIFICATION CLASSIFICATION AMPLIFICATION	0 RX RX	2
	SUBSURFACE (MARITIME) PLATFORM	AT	CR	M.84D	SWITCH CLASSIFICATION CLASSIFICATION AMPLIFICATION	0 RX RX	3
	MINUTE	AT	CR	M.4B	MINUTES TIME SWITCH	RX RX	4

C-457

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J5.4-2. J5.4 Message Data Element Translation from the M.4D/M.84D Message (Sheet 2 of 7)

WORD J5.4I (Cont'd)	Link 16		TRANSLATION		Link 11/11B		
	DATA ELEMENT	VALUE	REQUIRED	MESSAGE	FIELD	VALUE	NOTES
	HOUR	AT	CR	M.4B	HOURS TIME SWITCH	RX RX	4
J5.4E0	BEARING DRIFT	RX	=	M.84D	SWITCH BEARING DRIFT	0 RX	
	AUDIO	RX	=	M.4D	B-FRAME SWITCH AUDIO	2 RX	5
	DOPPLER	RX	=	M.4D	B-FRAME SWITCH DOPPLER	2 RX	5
	WORD FORMAT	2	None	NA	NA	NA	
	LATITUDE, 0.0051 MINUTE	AT	CR	M.4D	B-FRAME SWITCH X COORDINATE Y COORDINATE	0 or 1 RX RX	G9
	LONGITUDE, 0.0051 MINUTE	AT	CR	M.4D	B-FRAME SWITCH X COORDINATE Y COORDINATE	0 or 1 RX RX	G9
	BEARING REPORT TYPE	AT	CR	M.4D M.84D	B-FRAME SWITCH BEARING REPORT TYPE SWITCH BEARING INDICATOR	0 or 1 RX 0 RX	6
	FREQUENCY, SOURCE ACOUSTIC	AT	CR	M.4D	B-FRAME SWITCH SOURCE ACOUSTIC FREQUENCY	2 RX	5
	BEARING 1, ASW	AT	CR	M.4D M.84D	B-FRAME SWITCH BEARING REPORT TYPE SWITCH BEARING 1	0 or 1 RX 0 RX	7
	WORD FORMAT	1	None	NA	NA	NA	
J5.4C1	CONTINUATION WORD LABEL	1	None	NA	NA	NA	
	FREQUENCY, ASSOCIATED ACOUSTIC 1	AT	CR	M.84D	SWITCH FIRST ASSOCIATED ACOUSTIC FREQUENCY	1 RX	5

C-458

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J5.4-2. J5.4 Message Data Element Translation from the M.4D/M.84D Message (Sheet 3 of 7)

WORD	Link 16 DATA ELEMENT	TRANSLATION			Link 11/11B FIELD	VALUE	NOTES
		VALUE	REQUIRED	MESSAGE			
J5.4C1 (Cont'd)	FREQUENCY, ASSOCIATED ACOUSTIC 2	AT	CR	M.84D	SWITCH SECOND ASSOCIATED ACOUSTIC FREQUENCY	1 RX	5
	BEARING 2, ASW	AT	CR	M.4D	B-FRAME SWITCH	0 or 1	5,7
				M.84D	BEARING REPORT TYPE SWITCH	RX 1	
					BEARING 2	RX	
	BROADBAND	AT	CR	M.4D	B-FRAME SWITCH BROADBAND	2 RX	5
	RANGE ACCURACY, ASW	AT	CR	M.84D	SWITCH RANGE ACCURACY	0 RX	5
	RANGE	AT	CR	M.84D	SWITCH RANGE	0 RX	5
	SENSOR INDICATOR	AT	CR	M.84D	SWITCH SENSOR	0 RX	5
	BEARING ACCURACY, ASW	AT	CR	M.84D	SWITCH BEARING ACCURACY	0 RX	8
J5.4C2	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	2	None	NA	NA	NA	
	DEPTH CONTACT	AT	CR	M.84D	SWITCH CONTACT DEPTH	0 RX	5
	SUBSURFACE (MARITIME) PLATFORM ACTIVITY	0	None	NA	NA	NA	
	DEPTH, ABOVE/BELOW LAYER (SENSOR)	AT	CR	M.4D	B-FRAME SWITCH ABOVE/BELOW LAYER	2 RX	5
	DEPTH, SENSOR	AT	CR	M.4D	B-FRAME SWITCH SENSOR DEPTH	3 RX	5,9
	TRACK NUMBER, ORIGIN	AT	CR	M.4D	B-FRAME SWITCH TN ORIGINATOR	3 RX	5,613

C-459

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J5.4-2. J5.4 Message Data Element Translation from the M.4D/M.84D Message (Sheet 4 of 7)

Link 16			Link 11/11B		
WORD	DATA ELEMENT	TRANSLATION	FIELD	VALUE	NOTES
J5.4C2	SOUND PROPAGATION PATH	REQUIRED	B-FRAME SWITCH	2	5
(Cont'd)		AT CR M.4D	SOUND PROPAGATION PATH	RX	

APPENDIX C

TABLE C.5.2-J5.4-2. J5.4 Message Data Element Translation from the M.4D/M.84D Message (Sheet 5 of 7)

NOTES

1. The J5.4I Identity field is determined as follows:

Link 16	Link 11
IDENTITY	IDENTITY
0 - PENDING	0 - NO STATEMENT/PENDING
1 - UNKNOWN	3 - UNKNOWN
3 - FRIEND	1 - FRIEND
6 - HOSTILE	2 - HOSTILE

2. The J5.4I Confidence Level field is determined from the M.84D Classification and Classification Amplification fields as follows:

Link 16	Link 11	
CONFIDENCE LEVEL	CLASSIFICATION	CLASSIFICATION AMPLIFICATION
0 - NO STATEMENT	0 - NO STATEMENT/ UNCLASSIFIED	0 - NO STATEMENT
	9-15 - UNDEFINED	ANY
2 - POSSIBLE SUBMARINE LOW ONE	1 - POSSUB 1	
3 - POSSIBLE SUBMARINE LOW TWO	2 - POSSUB 2	
4 - POSSIBLE SUBMARINE HIGH THREE	3 - POSSUB 3	
5 - POSSIBLE SUBMARINE HIGH FOUR	4 - POSSUB 4	
6 - PROBABLE SUBMARINE	5 - PROBABLE SUBMARINE	
	6 - ACOUSTIC POSITIVE (ACPOS)	
7 - CERTAIN SUBMARINE	7 - CERTAIN SUBMARINE	
8 - NON SUBMARINE	8 - NONSUBMARINE	0, 2-5, 8-15
9 - SURFACE VESSEL		1, 6, 7

3. The J5.4I Subsurface (Maritime) Platform is determined from the M.84D Classification and Classification Amplification fields as follows:

APPENDIX C

TABLE C.5.2-J5.4-2. J5.4 Message Data Element Translation from the M.4D/M.84D Message (Sheet 6 of 7)

NOTES (Continued)

3. (Continued)

Link 16	Link 11	CLASSIFICATION
SUBSURFACE (MARITIME)	CLASSIFICATION	AMPLIFICATION
PLATFORM		
0	0	0
	1-7	0 or 14, 15
	9-15	ANY
1	1-7	1
2		3
6		9
7		10
8		11
9		2
13		4
14		5
15		6
16		7
17		8
18	8	0, 4, 8-15
19		1, 6, 7
20		2
22		3
25		5
33	1-7	12
34		13

4. If the M.4B Time Switch = 1, J5.4I Minute and Hour equate to M.4B Minutes and Hours, respectively. Otherwise, J5.4I Minute and Hour shall be set to No Statement.

5. If no M.4D with the indicated B-Frame Switch value, or M.84D with the indicated Switch value, is received in this message sequence, the indicated Link 16 fields shall be set to No Statement. Otherwise, the Link 11 fields equate without conversion.

6. If M.84D(SW=0) Bearing Indicator = 1, set J5.4 Bearing Report Type (BRT) to value 3. Otherwise, M.4D BRT equates to J5.4 BRT.

7. If the Link 16 BRT to be forwarded is 0 or 2, Bearing 1 equates without conversion to Bearing 1 ASW, and Bearing 2 ASW shall arbitrarily be set to 0 since it is not interpreted. If the Link 16 BRT to be forwarded is 1,

APPENDIX C

TABLE C.5.2-J5.4-2. J5.4 Message Data Element Translation from the M.4D/M.84D Message (Sheet 7 of 7)

NOTES (Continued)

7. (Continued)

Bearing 1 and Bearing 2 equate without conversion to Bearing 1 ASW and Bearing 2 ASW, respectively. If the Link 16 BRT to be forwarded is 3, Bearing 1 ASW and Bearing 2 ASW shall arbitrarily be set to 0 since these two fields will not be interpreted.

8. The J5.4C1 Bearing Accuracy, ASW field is determined from the M.84D Bearing Accuracy field as follows:

Link 16	Link 11/11B
BEARING ACCURACY, ASW (NO STATEMENT)	BEARING ACCURACY
0(NO STATEMENT)	0(NO STATEMENT)
1(+ OR - 2 DEGREES)	1(< = 2 DEGREES)
2(+ OR - 5 DEGREES)	2(< = 5 DEGREES)
3(+ OR - 10 DEGREES)	3(< = 10 DEGREES)
4(+ OR - 15 DEGREES)	4(< = 15 DEGREES)
5(+ OR - 20 DEGREES)	5(< = 20 DEGREES)
6(+ OR - 30 DEGREES)	6(< = 30 DEGREES)
8(OVER 45 DEGREES)	7(OVER 30 DEGREES)

9. The J5.4C2 Sensor Depth field is derived from the M.4D Sensor Depth field as follows: The Sensor Depth field value forwarded on Link 16 shall be twice that of the Link 11 value; except, when value 21-30 (Undefined), or 31 (No Statement), is received from Link 11, a value 127 (No Statement), shall be forwarded on Link 16.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-J6.0. J6.0 Message Data Element Translation from the M.11M/M.811M Message (Sheet 1 of 12)

Link 16					Link 11/11B		
<u>WORD</u> J6.0I	<u>DATA ELEMENT</u> WORD FORMAT	<u>TRANSLATION</u>			<u>FIELD</u> NA	<u>VALUE</u> NA	<u>NOTES</u>
		<u>VALUE</u> 0	<u>REQUIRED</u> None	<u>MESSAGE</u> NA			
	LABEL, J-SERIES	6	CR	M.11M	LABEL	11	
	SUBLABEL, J-SERIES	0	CR	M.11M	SUBLABEL	12	
	MESSAGE LENGTH INDICATOR	AR	None	NA	NA	NA	G3
	ENVIRONMENT/CATEGORY	AT	CR	M.11M	CATEGORY	RX	1
	SPECIAL PROCESSING INDICATOR	RX	=	M.11M	SPECIAL PROCESSING INDICATOR	RX	G5
	RESPONSE INDICATOR	0	None	NA	NA	NA	
	TRACK NUMBER, REFERENCE	AT	CR	M.11M	TRACK NUMBER	RX	G13
	NATIONALITY/ALLIANCE OF TRACK	AT	CR	M.11M	NATIONALITY/ALLIANCE	RX	2
	SPACE PLATFORM	0	None	NA	NA	NA	
	AIR PLATFORM	AT	CR	M.11M	CATEGORY GENERAL TYPE	1 or 5 RX	3
	SURFACE (MARITIME) PLATFORM	AT	CR	M.11M	CATEGORY GENERAL TYPE	2 RX	4
	SUBSURFACE (MARITIME) PLATFORM	AT	CR	M.11M	CATEGORY GENERAL TYPE	3 RX	5
	LAND (GROUND) PLATFORM	AT	CR	M.11M	CATEGORY GENERAL TYPE SPECIFIC TYPE	3 RX RX	6 15
	SPACE PLATFORM ACTIVITY	0	None	NA	NA	NA	
	AIR PLATFORM ACTIVITY	AT	CR	M.11M M.811M	CATEGORY MISSION	1 or 5 RX	7
	SURFACE (MARITIME) PLATFORM ACTIVITY	AT	CR	M.11M M.811M	CATEGORY MISSION	2 RX	8

C-465

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J6.0. J6.0 Message Data Element Translation from the M.11M/M.811M Message (Sheet 2 of 12)

WORD J6.0I (Cont'd)	Link 16		TRANSLATION		Link 11/11B		
	DATA ELEMENT	VALUE	REQUIRED	MESSAGE	FIELD	VALUE	NOTES
	SUBSURFACE (MARITIME) PLATFORM ACTIVITY	AT	CR	M.11M M.811M	CATEGORY MISSION	3 RX	9
J6.0E0	LAND (GROUND) PLATFORM ACTIVITY	AT	CR	M.11M M.811M	CATEGORY MISSION	4 RX	10
	ACTIVITY AMPLIFICATION INDEX	AT	CR	M.11M M.811M	CATEGORY CURRENT ACTIVITY	RX RX	11
	OPERATIONAL STATUS	RX	=	M.811M	OPERATIONAL STATUS	RX	
	WORD FORMAT	2	None	NA	NA	NA	
	SPACE SPECIFIC TYPE	0	None	NA	NA	NA	
	AIR SPECIFIC TYPE	AT	CR	M.11M	CATEGORY GENERAL TYPE SPECIFIC TYPE	1 or 5 RX RX	12
	SURFACE (MARITIME) SPECIFIC TYPE	AT	CR	M.11M	CATEGORY GENERAL TYPE SPECIFIC TYPE	2 RX RX	13
	SUBSURFACE (MARITIME) SPECIFIC TYPE	AT	CR	M.11M	CATEGORY GENERAL TYPE SPECIFIC TYPE	3 RX RX	14
	LAND (GROUND) SPECIFIC TYPE	AT	CR	M.11M	CATEGORY GENERAL TYPE SPECIFIC TYPE	4 RX RX	15
	TYPE MODIFICATION	0	None	NA	NA	NA	
	TRACK NUMBER, OBJECTIVE	AT	CR	M.811M	TRACK NUMBER-2	RX	G13
	LOCAL DISCRETE IDENTIFIER	RX	=	M.811M	SWITCH DISCRETE IDENTIFIER	1 RX	16
J6.0C1	TRACK NUMBER, CONTROLLING AGENCY OF TN REFERENCE	AT	CR	M.811M	SWITCH CONTROLLING UNIT	0 RX	16 G13
	NOT TRANSLATED						

C-466

APPENDIX C

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-J6.0. J6.0 Message Data Element Translation from the
M.11M/M.811M Message (Sheet 3 of 12)

NOTES

1. The conversion from Category to Environment/Category is as follows:

Link 16	Link 11/11B
ENVIRONMENT/CATEGORY	CATEGORY
0 - NO STATEMENT/UNKNOWN	0 - NO STATEMENT/UNKNOWN
2 - AIR	7 - RESET TO NO STATEMENT/ UNKNOWN
3 - SURFACE (MARITIME)	1 - AIR
4 - SUBSURFACE (MARITIME)	5 - MISSILE
5 - LAND (GROUND)	2 - SURFACE (OCEANIC)
	3 - SUBSURFACE
	4 - LAND

2. Nationality/Alliance of Track is derived from Nationality/Alliance as follows:

Link 16	Link 11/11B
NATIONALITY/ALLIANCE OF TRACK	NATIONALITY/ALLIANCE
0-98	0-98
127	99

3. When the M.11M Category = 1 (Air), the J6.0I Air Platform is derived from General Type as follows:

Link 16	Link 11/11B
AIR PLATFORM	GENERAL TYPE
0 - NO STATEMENT	0 - NO STATEMENT
1 - FIGHTER	11-13 - UNDEFINED
2 - FIGHTER BOMBER	14 - OTHER
4 - BOMBER	1 - FIGHTER/INTERCEPTOR
16 - AIRBORNE EARLY WARNING AND CONTROL (AEW)	2 - FIGHTER/BOMBER ATTACK
19 - DRONE	3 - BOMBER
23 - CIVIL, GENERAL	10 - AEW
27 - HELICOPTER (HELO)	6 - DRONE/RPV
28 - ATTACK HELICOPTER	8 - CIVIL
33 - TACTICAL SUPPORT	4 - HELO
34 - PATROL	5 - ATTACK HELO
63 - RESET TO NO STATEMENT	7 - SUPPORT
	9 - PATROL
	15 - RESET TO NO STATEMENT

APPENDIX C

TABLE C.5.2-J6.0. J6.0 Message Data Element Translation from the
M.11M/M.811M Message (Sheet 4 of 12)

NOTES (Continued)

When the M.11M Category = 5 (Missile), set the J6.0I Air Platform field to 13 (Missile).

4. When the M.11M Category = 2 (Surface Oceanic), the J6.0I Surface (Maritime) Platform is derived from General Type as follows:

Link 16	Link 11/11B
<u>SURFACE (MARITIME) PLATFORM</u>	<u>GENERAL TYPE</u>
0 - NO STATEMENT	0 - NO STATEMENT
	12, 13 - UNDEFINED
	14 - OTHER
1 - AIRCRAFT CARRIER (CV)	1 - AIRCRAFT CARRIER
3 - CRUISER	3 - CRUISER
4 - DESTROYER	2 - DESTROYER
5 - FRIGATE	4 - FRIGATE
7 - AMPHIBIOUS	7 - AMPHIBIOUS
12 - TANKER/OILER	9 - TANKER/OILER
14 - MINE WARFARE SHIP	6 - MINE WARFARE
27 - PATROL	5 - PATROL
28 - SUPPORT	8 - SUPPORT
29 - FISHING VESSEL	10 - FISHING BOAT
30 - MERCHANT VESSEL	11 - MERCHANT
63 - RESET TO NO STATEMENT	15 - RESET TO NO STATEMENT

5. When the M.11M Category = 3 (Subsurface), the J6.0I Subsurface (Maritime) Platform is derived from General Type as follows:

Link 16	Link 11/11B
<u>SUBSURFACE (MARITIME) PLATFORM</u>	<u>GENERAL TYPE</u>
0 - NO STATEMENT	0 - NO STATEMENT
	4-13 - UNDEFINED
	14 - OTHER
12 - NUCLEAR BALLISTIC MISSILE SUBMARINE	3 - BALLISTIC MISSILE LAUNCHER
28 - ATTACK SUBMARINE	1 - ATTACK
29 - CRUISE MISSILE LAUNCHER	2 - CRUISE MISSILE LAUNCHER
63 - RESET TO NO STATEMENT	15 - RESET TO NO STATEMENT

6. When the M.11M Category = 4 (Land), the J6.0I Land (Ground) Platform is derived from General Type as follows:

APPENDIX C

TABLE C.5.2-J6.0. J6.0 Message Data Element Translation from the
M.11M/M.811M Message (Sheet 5 of 12)

NOTES (Continued)

6. (Continued)

Link 16	Link 11/11B
LAND (GROUND) PLATFORM	GENERAL TYPE
0 - NO STATEMENT	0 - NO STATEMENT
1 - TROOP CONCENTRATION/UNIT	14 - OTHER
3 - COMMAND/CONTROL/CMD AND CONTROL CENTER	12 - TROOP CONCENTRATION
7 - AIRFIELD/AIRBASE	8 - COMMAND CENTER
13 - CONVOY	5 - AIR BASE
21 - FIELD ARTILLERY	13 - CONVOY/VEHICLE
22 - AIR DEFENSE ARTILLERY	11 - FIELD ARTILLERY SITE
40 - SURFACE-TO-AIR MISSILE (SAM) SITE	2 - AAA SITE
63 - RESET TO NO STATEMENT	1 - SAM SITE
	15 - RESET TO NO STATEMENT

Link 11/11B General Types 3 (GCI Site), 4 (EA Site), 6 (Trap), 7 (Dummy), 9 (SSM Site), and 10 (Point Target), equate directly to Link 16 Land (Ground) Specific Type (see Note 15).

7. When the M.11M Category = 1 (Air), the J6.0I Air Platform Activity is derived from the M.811M Mission field as follows:

Link 16	Link 11/11B
AIR PLATFORM ACTIVITY	MISSION
0 - NO STATEMENT	0 - NO STATEMENT
1 - RECONNAISSANCE	21-50 - UNDEFINED
4 - LOGISTICS SUPPORT	4 - RECCE
5 - ANTISURFACE WARFARE	5 - AIRLIFT (LOGISTICS)
8 - SEARCH AND RESCUE (SAR)	19 - ANTISHIP
10 - MINELAYING	15 - SAR
14 - ELECTRONIC WARFARE SUPPORT (ES)	17 - MINE LAYING
16 - PATROL (OCEAN SURVEILLANCE)	10 - ES
18 - ANTISUBMARINE WARFARE (ASW)	6 - PATROL (OCEAN SURVEILLANCE)
21 - AIR ASSAULT	14 - ASW
23 - ELECTRONIC ATTACK (EA)	12 - AIRBORNE ASSAULT
26 - MEDICAL EVACUATION (MEDEVAC)	13 - AIR ASSAULT
27 - MINE COUNTERMEASURES	9 - EA
	16 - MEDEVAC
	18 - MINE SWEEPING

APPENDIX C

TABLE C.5.2-J6.0. J6.0 Message Data Element Translation from the M.11M/M.811M Message (Sheet 6 of 12)

NOTES (Continued)

7. (Continued)

Link 16	Link 11/11B
AIR PLATFORM ACTIVITY	MISSION
29 - REFUELING/TANKING	11 - REFUEL
30 - INTERDICTION	3 - INTERDICTION
31 - COMBAT AIR PATROL (CAP)	1 - CAP (COUNTER AIR)
35 - CLOSE AIR SUPPORT (CAS)	2 - CAS
36 - AIRBORNE EARLY WARNING (AEW)	8 - AEW
38 - AIRBORNE COMMAND POST (ACP)	7 - AIRBORNE COMMAND POST (ACP)
44 - SPECIAL	20 - SPECIAL
115-126 - AIR ACTIVITY 1 THROUGH 12	51-62 - AM-1 THROUGH AM-12
127 - RESET TO NO STATEMENT	63 - RESET TO NO STATEMENT

When the M.11M Category = 5 (Missile), the J6.0I Air Platform is set to 13 (Missile) and the Air Platform Activity is derived from the M.811M Mission field as follows:

Link 16	Link 11/11B
AIR PLATFORM ACTIVITY	MISSION
0 - NO STATEMENT	0 - NO STATEMENT
	6-50 - UNDEFINED
	51-62 - MM-1 THROUGH MM-12
5 - ANTISURFACE WARFARE	2 - ANTISURFACE WARFARE
18 - ANTISUBMARINE WARFARE (ASW)	3 - ANTISUBSURFACE WARFARE
34 - NONCOMBATANT OPERATIONS	5 - NONCOMBATANT OPERATIONS
43 - STRIKE WARFARE	4 - STRIKE WARFARE
51 - COUNTER-AIR WARFARE	1 - ANTIAIR WARFARE
127 - RESET TO NO STATEMENT	63 - RESET TO NO STATEMENT

8. When the M.11M Category = 2 (Surface Oceanic), the J6.0I Surface (Maritime) Platform Activity is derived from the M.811M Mission field as follows:

Link 16	Link 11/11B
SURFACE (MARITIME) PLATFORM ACTIVITY	MISSION
0 - NO STATEMENT	0 - NO STATEMENT
	11-50 - UNDEFINED
1 - AIR WARFARE SUPPORT	2 - AIR WARFARE SUPPORT
5 - ANTISURFACE WARFARE	3 - ANTISURFACE WARFARE
6 - ELECTRONIC WARFARE (EW)	8 - ELECTRONIC WARFARE
14 - AMPHIBIOUS WARFARE	6 - AMPHIBIOUS WARFARE
18 - ANTISUBMARINE WARFARE (ASW)	4 - ANTISUBMARINE WARFARE

APPENDIX C

TABLE C.5.2-J6.0. J6.0 Message Data Element Translation from the M.11M/M.811M Message (Sheet 7 of 12)

NOTES (Continued)

8. (Continued)

Link 16	Link 11/11B
SURFACE (MARITIME) PLATFORM ACTIVITY	MISSION
21 - SPECIAL WARFARE	10 - SPECIAL WARFARE
22 - STRIKE WARFARE	5 - STRIKE WARFARE
23 - ANTIAIR WARFARE	1 - ANTIAIR WARFARE
27 - MINE WARFARE	7 - MINE WARFARE
29 - NONCOMBATANT OPERATIONS	9 - NONCOMBATANT OPERATIONS
115-126 - SURFACE (MARITIME) ACTIVITY 1 THROUGH 12	51-62 - SM-1 THROUGH SM-12
127 - RESET TO NO STATEMENT	63 - RESET TO NO STATEMENT

9. When the M.11M Category = 3 (Subsurface), the J6.0I Subsurface (Maritime) Platform Activity is derived from the M.811M Mission field as follows:

Link 16	Link 11/11B
SURFACE (MARITIME) PLATFORM ACTIVITY	MISSION
0 - NO STATEMENT	0 - NO STATEMENT
	9-50 - UNDEFINED
5 - ANTISURFACE WARFARE	3 - ANTISURFACE WARFARE
6 - ELECTRONIC WARFARE (EW)	7 - ELECTRONIC WARFARE
14 - AMPHIBIOUS WARFARE	4 - AMPHIBIOUS WARFARE
18 - ANTISUBMARINE WARFARE (ASW)	2 - ANTISUBMARINE WARFARE
21 - SPECIAL WARFARE	6 - SPECIAL WARFARE
22 - STRIKE WARFARE	1 - STRIKE WARFARE
27 - MINE WARFARE	5 - MINE WARFARE
29 - NONCOMBATANT OPERATIONS	8 - NONCOMBATANT OPERATIONS
115-126 - SURFACE (MARITIME) ACTIVITY 1 THROUGH 12	51-62 - UM-1 THROUGH UM-12
127 - RESET TO NO STATEMENT	63 - RESET TO NO STATEMENT

10. When the M.11M Category = 4 (Land), the J6.0I Land (Ground) Platform Activity is derived from the M.811M Mission field as follows:

Link 16	Link 11/11B
LAND (GROUND) PLATFORM ACTIVITY	MISSION
0 - NO STATEMENT	0 - NO STATEMENT
	1-62 - UNDEFINED
127 - RESET TO NO STATEMENT	63 - RESET TO NO STATEMENT

11. When M.11M Category = 5, Activity Amplification Index is derived from Current Activity as follows:

APPENDIX C

TABLE C.5.2-J6.0. J6.0 Message Data Element Translation from the
M.11M/M.811M Message (Sheet 8 of 12)

NOTES (Continued)

11. (Continued)

Link 16	Link 11/11B
ACTIVITY AMPLIFICATION INDEX	CURRENT ACTIVITY
0 - NO STATEMENT	0 - NO STATEMENT
	1 - UNDEFINED
	3-62 - UNDEFINED
2 - ASSIGNED TO DESTROY	2 - ASSIGNED TO DESTROY
63 - RESET TO NO STATEMENT	63 - RESET TO NO STATEMENT

When M.11M Category is not equal to 5, Activity Amplification Index equates to Current Activity.

12. When the M.11M Category = 1 (Air), the J6.0E0 Air Specific Type is derived from General Type and Specific Type as follows:

Link 16	Link 11/11B	
AIR SPECIFIC TYPE	GENERAL TYPE	SPECIFIC TYPE
0	1	0-31, 49-62
4094	ALL	63
0	2	0-31, 34, 49-62
	3	0-31, 41-62
	4	0-31, 39-62
	5	0-31, 35-62
	6	0-62
	7	0-31, 48-62
	8	0-32, 45-62
	9 or 10	0-62
	11-13	ANY
1	1 or 2	41
2	1 or 2	42
4	1	43
5	1	44
6	1 or 2	45
8	1 or 2	46
38	1	47
39	1	48
45	2	36
50	1 or 2	37
53	1	38
54	2	38
55	2	39

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-J6.0. J6.0 Message Data Element Translation from the
M.11M/M.811M Message (Sheet 9 of 12)

NOTES (Continued)

12. (Continued)

Link 16	Link 11/11B	
AIR SPECIFIC TYPE	GENERAL TYPE	SPECIFIC TYPE
61	1	40
62	1	34
63	1 or 2	35
64	1	36
66	1	39
70	1 or 2	32
71	1 or 2	33
256	2	43
258	2	40
260	2	48
262	3	39
266	3	40
267	2	47
268	2	44
289	3	36
290	3	33
291	3 or 7	34
292	3	35
293	3	38
294	3 or 7	32
296	3	37
592	7	36
594	7	41
595	7	38
766	10	0-31, 62
822	7	40
1027	7	42
1028	7	43
1030	7	45
1031	7	46
1040	7 or 8	37
1042	8	38
1043	8	39
1044	8	40
1048	8	43
1049	8	41
1051	8	42
1059	7	44
1068	8	44
1071	8	36
1087	7	33
1098	7 or 8	35
1104	8	34
1108	8	33
1109	7	39

APPENDIX C

TABLE C.5.2-J6.0. J6.0 Message Data Element Translation from the M.11M/M.811M Message (Sheet 10 of 12)

NOTES (Continued)

12. (Continued)

Link 16	Link 11/11B	
AIR SPECIFIC TYPE	GENERAL TYPE	SPECIFIC TYPE
1110	7	47
1280	5	34
1290	4	36
1292	4	35
1294	4	38
1300	4	37
1329	5	32
1333	4	32
1334	4	33
1336	4	34
1339	5	33

When the M.11M Category=5, Missile, Specific Type value 63 shall be translated to 4094, Reset to No Statement, in the J6.0E0 Air Specific Type field. All other valid M.11M Category=5 Specific Type values shall be translated to 0, No Statement, in the J6.0E0 Air Specific Type field.

13. When the M.11M Category = 2, Surface Oceanic, Specific Type value 63 shall be translated to 4095, Reset to No Statement, in the J6.0E0 Surface (Maritime) Specific Type field. All other valid M.11M Category = 2 Specific Type values shall be translated to 0, No Statement, in the J6.0E0 Surface (Maritime) Specific Type field.

14. When the M.11M Category = 3, Subsurface, Specific Type value 63 shall be translated to 4095, Reset to No Statement, in the J6.0E0 Subsurface (Maritime) Specific Type field. All other valid M.11M Category = 3 Specific Type values shall be translated to 0, No Statement, in the J6.0E0 Subsurface (Maritime) Specific Type field.

15. When the M.11M Category = 4 (Land), the J6.0E0 Land (Ground) Specific Type is derived from General Type and Specific Type as follows:

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-J6.0. J6.0 Message Data Element Translation from the
M.11M/M.811M Message (Sheet 11 of 12)

NOTES (Continued)

15. (Continued)

Link 16	Link 11/11B	
LAND (GROUND) SPECIFIC TYPE	GENERAL TYPE	SPECIFIC TYPE
4094	ALL	63
0	1	0-39, 44, 46-62
	2	0-31, 45-62
	5	0 or 39-62
	8	0-31, 34, 36-62
	11	0-32, 35-62
	12	0-31, 36-62
	13	0-31, 36, 38-62
	14	0-62
27	1	40
28	1	45
30	1	41
31	1	42
32	1	43
64	12	35
69	12	34
70	12	33
73	5	1-38
75	2	32-44
77	11	34
83	13	37
94	13	32
114	8	32
123	8	33
154	8	35
172	11	33

In some cases Link 11/11B General Type and Specific Type translate to both Link 16 Land (Ground) Specific Type and Land (Ground) Platform. These translations are converted as follows:

Link 16		Link 11/11B	
LAND (GROUND) SPECIFIC TYPE	LAND (GROUND) PLATFORM	GENERAL TYPE	SPECIFIC TYPE
0	17	13	33
	48		35
90	0	7	0-31, 34, 37-62
	22		33
	24		35
	32		36
	40		32
91	0	6	0-62

APPENDIX C

TABLE C.5.2-J6.0. J6.0 Message Data Element Translation from the M.11M/M.811M Message (Sheet 12 of 12)

NOTES (Continued)

15. (Continued)

Link 16		Link 11/11B	
LAND (GROUND)	LAND (GROUND)	GENERAL TYPE	SPECIFIC TYPE
SPECIFIC TYPE	PLATFORM		
92	0	10	0-31, 34, 40-62
	8		37
	9		33 or 36
	11		32
	16		35
	32		39
	33		38
93	0	4	0-31, 34-62
	32		33
	33		32
96	0	3	0-37
139	0	9	0-34
155	25	13	34

16. The J6.0E0 Local Discrete Identifier and Track Number, Controlling Agency of TN Reference fields are derived from the M.811M Discrete Identifier and Controlling Unit fields respectively. However only one field at a time can be sent in the M.811M message. If the Switch in the M.811M message is set to 0 then the Controlling Unit is reported and if the Switch is set to 1 then the Discrete Identifier is reported.

TABLE C.5.2-J7.0-1. J7.0(ACT=0) Message Data Element Translation from Link 11/11B (Sheet 1 of 3)

Link 16					Link 11/11B		
<u>WORD</u> J7.0I	<u>DATA ELEMENT</u> WORD FORMAT	<u>VALUE</u> 0	<u>TRANSLATION</u>		<u>FIELD</u> NA	<u>VALUE</u> NA	<u>NOTES</u>
			<u>REQUIRED</u> None	<u>MESSAGE</u> NA			
	LABEL, J-SERIES	7	CR	M.9A	LABEL	9	
	SUBLABEL, J-SERIES	0	CR	M.9A	SUBLABEL	0	
	MESSAGE LENGTH INDICATOR	AR	None	NA	NA	NA	G3
	EXERCISE INDICATOR	0	None	NA	NA	NA	1
	ACTION, TRACK MANAGEMENT	0	CR	M.9A	ACTION	4	
	CONTROLLING UNIT INDICATOR	0	None	NA	NA	NA	1
	TRACK NUMBER, REFERENCE	AT	CR	M.9A	TRACK NUMBER	RX	G13
	STRENGTH	0	None	NA	NA	NA	
	ALERT STATUS CHANGE	0	None	NA	NA	NA	
	SPACE PLATFORM	0	None	NA	NA	NA	
	AIR PLATFORM	0	None	NA	NA	NA	1
	SURFACE (MARITIME) PLATFORM	0	None	NA	NA	NA	1
	SUBSURFACE (MARITIME) PLATFORM	0	None	NA	NA	NA	1
	LAND (GROUND) PLATFORM	0	None	NA	NA	NA	1
	SPACE PLATFORM ACTIVITY	0	None	NA	NA	NA	
	AIR PLATFORM ACTIVITY	0	None	NA	NA	NA	1
	SURFACE (MARITIME) PLATFORM ACTIVITY	0	None	NA	NA	NA	1
	SUBSURFACE (MARITIME) PLATFORM ACTIVITY	0	None	NA	NA	NA	1
	LAND (GROUND) PLATFORM ACTIVITY	0	None	NA	NA	NA	1

C-477

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J7.0-1. J7.0(ACT=0) Message Data Element Translation from Link 11/11B (Sheet 2 of 3)

Link 16					Link 11/11B		
WORD	DATA ELEMENT	VALUE	TRANSLATION		FIELD	VALUE	NOTES
J7.0I (Cont'd)	ENVIRONMENT/CATEGORY	0	REQUIRED	MESSAGE	NA	NA	1
	IDENTITY CONFIDENCE	0	None	NA	NA	NA	
	IDENTITY	0	None	NA	NA	NA	1
	IDENTITY AMPLIFYING DESCRIPTOR	NA	None	NA	NA	NA	
	SPECIAL INTEREST INDICATOR	0	None	NA	NA	NA	
J7.0E0	NOT TRANSLATED						
J7.0C1	NOT TRANSLATED						

APPENDIX C

TABLE C.5.2-J7.0-1. J7.0(ACT=0) Message Data Element Translation from Link
11/11B (Sheet 3 of 3)

NOTES

1. An equivalent field exists in the M.9A message but is not reported with the M.9A(AC=4) Drop Track message.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-J7.0-2. J7.0(ACT=1) or J7.0(ACT=2) Message Data Element Translation from Link 11/11B (Sheet 1 of 4)

Link 16					Link 11/11B		
<u>WORD</u> J7.0I	<u>DATA ELEMENT</u> <u>WORD FORMAT</u>	<u>TRANSLATION</u>			<u>FIELD</u> NA	<u>VALUE</u> NA	<u>NOTES</u>
		<u>VALUE</u> 0	<u>REQUIRED</u> None	<u>MESSAGE</u> NA			
	LABEL, J-SERIES	7	CR	M.9A	LABEL	9	
	SUBLABEL, J-SERIES	0	CR	M.9A	SUBLABEL	0	
	MESSAGE LENGTH INDICATOR	AR	None	NA	NA	NA	G3
	EXERCISE INDICATOR	AT	CR	M.9A(AC=1 OR 2)	IDENTITY PRIMARY IDENTITY AMPLIFICATION IDENTITY AMPLIFICATION	RX RX RX	G20
	ACTION, TRACK MANAGEMENT	1 or 2 =		M.9A	ACTION	1 or 2	
	CONTROLLING UNIT INDICATOR	AT	CR	M.9A(AC=6)	PU/RU ADDRESS/SOURCE	RX	2
	TRACK NUMBER, REFERENCE	AT	CR	M.9A(AC=1 OR 2)	TRACK NUMBER	RX	G13
	STRENGTH	0	None	NA	NA	NA	
	ALERT STATUS CHANGE	0	None	NA	NA	NA	1
	SPACE PLATFORM	0	None	NA	NA	NA	
	AIR PLATFORM	AT	CR	M.9A(AC=1 OR 2)	IDENTITY PRIMARY IDENTITY AMPLIFICATION IDENTITY AMPLIFICATION	RX RX RX	G20
	SURFACE (MARITIME) PLATFORM	AT	CR	M.9A(AC=1 OR 2)	IDENTITY PRIMARY IDENTITY AMPLIFICATION IDENTITY AMPLIFICATION	RX RX RX	G21
	SUBSURFACE (MARITIME) PLATFORM	0	None	NA	NA	NA	3

C-481

MIL-STD-6016B
APPENDIX C

TABLE C.5.2-J7.0-2. J7.0(ACT=1) or J7.0(ACT=2) Message Data Element Translation from Link 11/11B (Sheet 2 of 4)

WORD J7.0I (Cont'd)	Link 16	TRANSLATION			Link 11/11B	VALUE	NOTES
	DATA ELEMENT	VALUE	REQUIRED	MESSAGE	FIELD		
	LAND (GROUND) PLATFORM	0	None	NA	NA	NA	3
	SPACE PLATFORM ACTIVITY	0	None	NA	NA	NA	
	AIR PLATFORM ACTIVITY	AT	CR	M.9A(AC=1 OR 2)	IDENTITY PRIMARY IDENTITY AMPLIFICATION	RX RX	G20
					IDENTITY AMPLIFICATION	RX	
	SURFACE (MARITIME) PLATFORM ACTIVITY	AT	CR	M.9A(AC=1 OR 2)	IDENTITY PRIMARY IDENTITY AMPLIFICATION	RX RX	G21
					IDENTITY AMPLIFICATION	RX	
	LAND (GROUND) PLATFORM ACTIVITY	0	None	NA	NA	NA	3
	ENVIRONMENT/CATEGORY	AT	CR	M.9A(AC=1 OR 2)	ENVIRONMENT/CATEGORY	RX	3
	IDENTITY CONFIDENCE	0	None	NA	NA	NA	
	IDENTITY	AT	CR	M.9A(AC=1 OR 2)	IDENTITY	RX	G20, G21
					PRIMARY IDENTITY AMPLIFICATION	RX	
					IDENTITY AMPLIFICATION	RX	
	IDENTITY AMPLIFYING DESCRIPTOR	AT	CR	M.9A(AC=1 OR 2)	IDENTITY	RX	G20, G21
					PRIMARY IDENTITY AMPLIFICATION	RX	
					IDENTITY AMPLIFICATION	RX	

C-482

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J7.0-2. J7.0(ACT=1) or J7.0(ACT=2) Message Data Element Translation from Link 11/11B (Sheet 3 of 4)

Link 16		Link 11/11B		
WORD	DATA ELEMENT	TRANSLATION	FIELD	VALUE
J7.0I	SPECIAL INTEREST INDICATOR	MESSAGE	IDENTITY	NOTES
(Cont'd)		M.9A(AC=1 OR 2)		G20,
			PRIMARY IDENTITY	G21
			AMPLIFICATION	
			IDENTITY	
			AMPLIFICATION	
J7.0E0	NOT TRANSLATED			
J7.0C1	NOT TRANSLATED			

APPENDIX C

TABLE C.5.2-J7.0-2. J7.0(ACT=1) or J7.0(ACT=2) Message Data Element
Translation from Link 11/11B (Sheet 4 of 4)

NOTES

1. An equivalent field exists in the M.9A message but is not reported with the M.9A(AC=1 or 2) message.
2. The controlling unit is determined by a separately received M.9A(AC=6) message. This field should reflect whether the forwarded M.9A(AC=1 or 2) message did or did not originate with the current controlling unit.
3. Air and Surface are the only Environment/Category values that are legal for transmission with the M.9A(AC=1 or 2) message. The conversion for Environment/Category is as follows:

Link 16
ENVIRONMENT/CATEGORY
2 - AIR
3 - SURFACE (MARITIME)

Link 11/11B
ENVIRONMENT/CATEGORY
1 - AIR
2 - SURFACE

TABLE C.5.2-J7.0-3. J7.0(ACT=3) or J7.0(ACT=4) Message Data Element Translation from Link 11/11B (Sheet
1 of 3)

Link 16					Link 11/11B		
<u>WORD</u> J7.0I	<u>DATA ELEMENT</u> <u>WORD FORMAT</u>	<u>VALUE</u> 0	<u>TRANSLATION</u> <u>REQUIRED</u> None	<u>MESSAGE</u> NA	<u>FIELD</u> NA	<u>VALUE</u> NA	<u>NOTES</u>
	LABEL, J-SERIES	7	CR	M.9A	LABEL	9	
	SUBLABEL, J-SERIES	0	CR	M.9A	SUBLABEL	0	
	MESSAGE LENGTH INDICATOR	AR	None	NA	NA	NA	G3
	EXERCISE INDICATOR	0	None	NA	NA	NA	
	ACTION, TRACK MANAGEMENT	3 or 4	CR	M.9A(AC=5 OR 7)	STATUS INDICATOR	RX	1
	CONTROLLING UNIT INDICATOR	0	None	NA	NA	NA	2
	TRACK NUMBER, REFERENCE	AT	CR	M.9A	TRACK NUMBER	RX	G13
	STRENGTH	0	None	NA	NA	NA	
	ALERT STATUS CHANGE	AT	CR	M.9A	ACTION	5 or 7	1
	SPACE PLATFORM	0	None	NA	NA	NA	
	AIR PLATFORM	0	None	NA	NA	NA	2
	SURFACE (MARITIME) PLATFORM	0	None	NA	NA	NA	2
	SUBSURFACE (MARITIME) PLATFORM	0	None	NA	NA	NA	2
	LAND (GROUND) PLATFORM	0	None	NA	NA	NA	2
	SPACE PLATFORM ACTIVITY	0	None	NA	NA	NA	
	AIR PLATFORM ACTIVITY	0	None	NA	NA	NA	2
	SURFACE (MARITIME) PLATFORM ACTIVITY	0	None	NA	NA	NA	2
	SUBSURFACE (MARITIME) PLATFORM ACTIVITY	0	None	NA	NA	NA	2

C-485

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J7.0-3. J7.0(ACT=3) or J7.0(ACT=4) Message Data Element Translation from Link 11/11B (Sheet 2 of 3)

Link 16					Link 11/11B		
WORD	DATA ELEMENT	VALUE	TRANSLATION REQUIRED	MESSAGE	FIELD	VALUE	NOTES
J7.0I (Cont'd)	LAND (GROUND) PLATFORM ACTIVITY	0	None	NA	NA	NA	2
	ENVIRONMENT/CATEGORY	0	None	NA	NA	NA	
	IDENTITY CONFIDENCE	0	None	NA	NA	NA	
	IDENTITY	0	None	NA	NA	NA	2
	IDENTITY AMPLIFYING DESCRIPTOR	NA	None	NA	NA	NA	
	SPECIAL INTEREST INDICATOR	0	None	NA	NA	NA	
J7.0E0	NOT TRANSLATED						
J7.0C1	NOT TRANSLATED						

APPENDIX C

TABLE C.5.2-J7.0-3. J7.0(ACT=3) or J7.0(ACT=4) Message Data Element
Translation from Link 11/11B (Sheet 3 of 3)

NOTES

1. The M.9A(AC=5) message establishes the J7.0 Alert Status Change value = 1 message. The M.9A(AC=7) message establishes the J7.0 Alert Status Change value = 0 message. The M.9A Status Indicator = 0 message establishes the J7.0 Action, Track Management value = 3 message. The M.9A Status Indicator = 1 message establishes the J7.0 Action, Track Management value = 4 message. Note that the J7.0 message will be forwarded only in those cases where the current Link 16 state will be altered.
2. An equivalent field exists in the M.9A message but is not reported with the M.9A(AC=5 or 7) message.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-J7.1. J7.1 Message Data Element Translation from Link 11/11B (Sheet 1 of 3)

WORD J7.1I	Link 16	TRANSLATION			Link 11/11B	VALUE	NOTES
	DATA ELEMENT WORD FORMAT	VALUE 0	REQUIRED None	MESSAGE NA	FIELD NA		
	LABEL, J-SERIES	7	CR	M.9A	LABEL	9	
	SUBLABEL, J-SERIES	1	CR	M.9A	SUBLABEL ACTION	0 3	
	MESSAGE LENGTH INDICATOR	AR	None	NA	NA	NA	G3
	ACTION, DATA UPDATE REQUEST	AT	CR	M.9A(AC=3)	STATUS INDICATOR	1	1
	TRACK NUMBER, REFERENCE	AT	CR	M.9A	TRACK NUMBER	RX	G13
	REFERENCE POINT DATA REQUEST INDICATOR	1	CR	M.9A(AC=3)	STATUS INDICATOR	1	1
	ELECTRONIC ATTACK DATA REQUEST INDICATOR	1	CR	M.9A(AC=3)	STATUS INDICATOR	1	1
	ES DATA REQUEST INDICATOR	1	CR	M.9A(AC=3)	STATUS INDICATOR	1	1
	ELECTRONIC WARFARE FIXES DATA REQUEST INDICATOR	1	CR	M.9A(AC=3)	STATUS INDICATOR	1	1
	WEAPON STATUS DATA REQUEST INDICATOR	1	CR	M.9A(AC=3)	STATUS INDICATOR	1	1
	WEATHER DATA REQUEST INDICATOR	0	None	NA	NA	NA	
	AMPLIFICATION DATA REQUEST INDICATOR	1	CR	M.9A(AC=3)	STATUS INDICATOR	1	1
	FILTER DATA REQUEST INDICATOR	0	None	NA	NA	NA	
	NUMBER/FREQUENCY OF UPDATES	0	None	NA	NA	NA	
	COVARIANCE INDICATOR	0	None	NA	NA	NA	
	FILTER NUMBER	0	None	NA	NA	NA	
	TRACK NUMBER, ADDRESSEE 1	AT	CR	M.9A	PU/RU ADDRESS/SOURCE	RX	G12

C-489

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J7.1. J7.1 Message Data Element Translation from Link 11/11B (Sheet 2 of 3)

Link 16				Link 11/11B			
<u>WORD</u>	<u>DATA ELEMENT</u>	<u>TRANSLATION</u>			<u>FIELD</u>	<u>VALUE</u>	<u>NOTES</u>
J7.1C1	NOT TRANSLATED	<u>VALUE</u>	<u>REQUIRED</u>	<u>MESSAGE</u>			2

APPENDIX C

TABLE C.5.2-J7.1. J7.1 Message Data Element Translation from Link 11/11B
(Sheet 3 of 3)

NOTES

1. If the Status Indicator = 1 and Track Number = 0 in the M.9A(AC=3) message, the Action, Data Update Request is set to 0 and all data request indicators except Weather and Filter are set to 1. In all other cases, the M.9A(AC=3) message is not forwarded.
2. The J7.1C1 word will never be sent as a result of forwarding an M.9A(AC=3) message since only one addressee can be given in the latter message.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-J7.2. J7.2 Message Data Element Translation from Link 11/11B

Link 16		TRANSLATION			Link 11/11B		
<u>WORD</u>	<u>DATA ELEMENT</u>	<u>VALUE</u>	<u>REQUIRED</u>	<u>MESSAGE</u>	<u>FIELD</u>	<u>VALUE</u>	<u>NOTES</u>
J7.2I	WORD FORMAT	0	None	NA	NA	NA	
	LABEL, J-SERIES	7	CR	M.9B	LABEL	9	
	SUBLABEL, J-SERIES	2	CR	M.9B	SUBLABEL ACTION	1 7	
	MESSAGE LENGTH INDICATOR	AR	None	NA	NA	NA	G3
	ACTION, CORRELATE	0	CR	M.9B	ACTION	7	
	RESPONSE VALUE	RX	=	M.9B	RESPONSE VALUE	RX	
	TRACK NUMBER, RETAINED	AT	CR	M.9B	TRACK NUMBER ONE	RX	G13
	TRACK NUMBER, DROPPED	AT	CR	M.9B	TRACK NUMBER TWO	RX	G13

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-J7.3. J7.3 Message Data Element Translation from Link 11/11B (Sheet 1 of 2)

Link 16					Link 11/11B		
<u>WORD</u> J7.3I	<u>DATA ELEMENT</u> WORD FORMAT	<u>TRANSLATION</u>			<u>FIELD</u> NA	<u>VALUE</u> NA	<u>NOTES</u>
		<u>VALUE</u> 0	<u>REQUIRED</u> None	<u>MESSAGE</u> NA			
	LABEL, J-SERIES	7	CR	M.9C	LABEL	9	
	SUBLABEL, J-SERIES	3	CR	M.9C	SUBLABEL	2	
	MESSAGE LENGTH INDICATOR	AR	None	NA	NA	NA	G3
	ACTION, POINTER	AT	CR	M.9C	OPERATOR POSITION	RX	1
	LATITUDE, 0.0412 MINUTE	AT	CR	M.9C	X COORDINATE Y COORDINATE	RX RX	G9
	LONGITUDE, 0.0412 MINUTE	AT	CR	M.9C	X COORDINATE Y COORDINATE	RX RX	G9
	TRACK NUMBER, ADDRESSEE 1	AT	CR	M.9C	PU/RU ADDRESSEE	RX	G12
J7.3C1	NOT TRANSLATED						2
J7.3C2	NOT TRANSLATED						
J7.3C3	NOT TRANSLATED						

APPENDIX C

TABLE C.5.2-J7.3. J7.3 Message Data Element Translation from Link 11/11B
(Sheet 2 of 2)

NOTES

1. The Action, Pointer field is determined from the Operator Position field as follows:

Link 16	Link 11/11B
ACTION, POINTER	OPERATOR POSITION
1 - WEAPONS	0 - WEAPONS
2 - TRACKING	1 - TRACKING
3 - ELECTRONIC WARFARE	2 - EW
4 - SPECIAL PROCESSING	3 - SP

2. The J7.3C1 word will never be sent as a result of forwarding an M.9C message since only one addressee can be given in the latter message.

TABLE C.5.2-J7.4. J7.4 Message Data Element Translation from Link 11/11B (Sheet 1 of 2)

Link 16					Link 11/11B		
WORD	DATA ELEMENT	TRANSLATION			FIELD	VALUE	NOTES
		VALUE	REQUIRED	MESSAGE			
J7.4I	WORD FORMAT	0	None	NA	NA	NA	
	LABEL, J-SERIES	7	CR	M.9E	LABEL	9	
	SUBLABEL, J-SERIES	4	CR	M.9E	SUBLABEL	4	
	MESSAGE LENGTH INDICATOR	AR	None	NA	NA	NA	G3
	TRACK NUMBER, REPORT/REQUEST	AT	CR	M.9E	ACTION	RX	1
	LINK 11/LINK 11B TRACK NUMBER APPLICABILITY	0	None	NA	NA	NA	2
	NATO LINK 1 TRACK NUMBER APPLICABILITY	1	None	NA	NA	NA	2
	ATDL-1 TRACK NUMBER APPLICABILITY	0	None	NA	NA	NA	2
	IJMS, SYSTEM REFERENCE NUMBER APPLICABILITY	0	None	NA	NA	NA	2
	TRACK NUMBER, REFERENCE	AT	CR	M.9E	TRACK NUMBER	RX	G13
	LINK 11/LINK 11B TRACK NUMBER	0	None	NA	NA	NA	
	NATO LINK 1 TRACK NUMBER	RX	=	M.9E	LINK 1 NATO TRACK NUMBER	RX	3
J7.4E0	NOT TRANSLATED						

C-497

MIL-STD-6016B
APPENDIX C

APPENDIX C

TABLE C.5.2-J7.4. J7.4 Message Data Element Translation from Link 11/11B
(Sheet 2 of 2)

NOTES

1. If the Link 11/11B Action = 5, set TN, Report/Request to 1. If the Link 11/11B Action = 3 or 7, set TN, Report/Request to 0.
2. Only NATO Link 1 Track Number is forwarded to Link 16. Therefore, only the NATO Link 1 Track Number Applicability field is set to 1, all other Applicability fields are set to 0.
3. Set to AA000 if forwarding an M.9E(AC=5) message.

TABLE C.5.2-J7.5-1. J7.5 Message Data Element Translation from the M.9A(AC=9) Message (Sheet 1 of 4)

Link 16					Link 11/11B		
WORD J7.5I	DATA ELEMENT WORD FORMAT	TRANSLATION			FIELD NA	VALUE NA	NOTES 1
		VALUE 0	REQUIRED None	MESSAGE NA			
	LABEL, J-SERIES	7	CR	M.9A	LABEL	9	
	SUBLABEL, J-SERIES	5	CR	M.9A	SUBLABEL	0	
	MESSAGE LENGTH INDICATOR	AR	None	NA	NA	NA	G3
	ACTION, IFF/SIF MANAGEMENT	AT	CR	M.9A	ACTION IFF/SIF ACTION CODE MODE INDICATOR	9 RX RX	1 2
	MODE IV INDICATOR APPLICABILITY	AT	CR	M.9A	MODE INDICATOR	RX	3
	MODE IV INDICATOR	AT	CR	M.9A	MODE I CODE MODE II/III CODE MODE IV INDICATOR MODE INDICATOR	RX RX RX RX	4, G15 4, G15 4, G15 3
	TRACK NUMBER, REFERENCE	AT	CR	M.9A	TRACK NUMBER	RX	G13
	MODE I CODE APPLICABILITY	AT	CR	M.9A	MODE INDICATOR	RX	3
	MODE II CODE APPLICABILITY	AT	CR	M.9A	MODE INDICATOR	RX	3
	MODE III CODE APPLICABILITY	AT	CR	M.9A	MODE INDICATOR	RX	3
	MODE I CODE	AT	CR	M.9A	MODE I CODE MODE II/III CODE MODE IV INDICATOR MODE INDICATOR	RX RX RX RX	4, 5, G15 4, 5, G15 4, 5, G15 3
	MODE II CODE	AT	CR	M.9A	MODE I CODE MODE II/III CODE MODE IV INDICATOR MODE INDICATOR	RX RX RX RX	4, G15 4, G15 4, G15 4, G15

C-499

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J7.5-1. J7.5 Message Data Element Translation from the M.9A(AC=9) Message (Sheet 2 of 4)

Link 16			Link 11/11B		
WORD	DATA ELEMENT	TRANSLATION	FIELD	VALUE	NOTES
J7.5I	MODE III CODE	REQUIRED	MODE I CODE	RX	4, G15
(Cont'd)		CR	MODE II/III CODE	RX	4, G15
			MODE IV INDICATOR	RX	4, G15
			MODE INDICATOR	RX	3

APPENDIX C

TABLE C.5.2-J7.5-1. J7.5 Message Data Element Translation from the M.9A(AC=9) Message (Sheet 3 of 4)

NOTES

1. The J7.5 (ACT = 0, 1, or 2) messages are translated from the M.9A(AC=9) message. The J7.5 (ACT = 3) message is translated from the M.11D(TR=1) message.
2. The Action, IFF/SIF Management field is translated from both the IFF/SIF Action Code and the Mode Indicator fields as follows:

<u>Link 16</u>	<u>Link 11/11B</u>	
<u>ACTION, IFF/SIF</u>		
<u>MANAGEMENT</u>	<u>IFF/SIF ACTION CODE</u>	<u>MODE INDICATOR</u>
0	0	0, 2-4, 6
1	1	2-4, 6
2	1	7

3. The Mode Applicability field is translated from the Mode Indicator field as follows:

<u>Link 16</u>	<u>Link 11/11B</u>
<u>MODE IV INDICATOR APPLICABILITY</u>	<u>MODE INDICATOR</u>
0	0, 2, 4, 6
1	3 or 7
<u>MODE I CODE APPLICABILITY</u>	<u>MODE INDICATOR</u>
0	3, 4, 6
1	0, 2, 7
<u>MODE II CODE APPLICABILITY</u>	<u>MODE INDICATOR</u>
0	2, 3, 6
1	0, 4, 7
<u>MODE III CODE APPLICABILITY</u>	<u>MODE INDICATOR</u>
0	2-4
1	0, 6, 7

4. Only one of the J7.5 Mode I, II, III, or IV data elements will be nonzero as translated from the M.9A(AC=9, ISAC=1) message. The Mode Indicator (MI=2, 3, 4, or 6) indicates which mode is reported in the M.9A(AC=9) Mode I/II/III/IV Codes field. In all other cases the J7.5 Mode Codes will be equal to zero.

APPENDIX C

TABLE C.5.2-J7.5-1. J7.5 Message Data Element Translation from the
M.9A(AC=9) Message (Sheet 4 of 4)

NOTES (Continued)

5. Valid Mode I codes for data link exchange shall range from 01 through 73 (octal) with 31 possible values, those values with least significant digit greater than 3 not being used. The Mode I field of the J7.5I IFF Codes are in the order A4, A2, A1, B2, B1, with the most significant bit A4 in bit position 45. The Mode I/II/III Code field of the M.9A(AC=9) IFF codes are in the order A, B, C, D, (A, B only for Mode I) with each triad in the order 4, 2, 1 and the most significant bit A4 is bit position 23.

TABLE C.5.2-J7.5-2. J7.5 Message Data Element Translation from the M.11D Message (Sheet 1 of 2)

Link 16					Link 11/11B		
<u>WORD</u> J7.5I	<u>DATA ELEMENT</u> WORD FORMAT	<u>VALUE</u> 0	<u>TRANSLATION</u>		<u>FIELD</u> NA	<u>VALUE</u> NA	<u>NOTES</u>
			<u>REQUIRED</u>	<u>MESSAGE</u>			
	LABEL, J-SERIES	7	CR	M.11D	LABEL	11	
	SUBLABEL, J-SERIES	5	CR	M.11D	SUBLABEL	3	
	MESSAGE LENGTH INDICATOR	AR	None	NA	NA	NA	G3
	ACTION, IFF/SIF MANAGEMENT	3	AT	M.11D	TYPE REPORT	1	1
	MODE IV INDICATOR APPLICABILITY	0	None	NA	NA	NA	
	MODE IV INDICATOR	0	None	NA	NA	NA	
	TRACK NUMBER, REFERENCE	AT	CR	M.11D	TRACK NUMBER	RX	G13
	SPECIAL CODE I APPLICABILITY	0	None	NA	NA	NA	
	SPECIAL CODE II APPLICABILITY	1	None	NA	NA	NA	
	SPECIAL CODE III APPLICABILITY	0	None	NA	NA	NA	
	SPECIAL CODE I	0	None	NA	NA	NA	
	SPECIAL CODE II	RX	=	M.11D	SPECIAL CODE	RX	
	SPECIAL CODE III	0	None	NA	NA	NA	

APPENDIX C

TABLE C.5.2-J7.5-2. J7.5 Message Data Element Translation from the M.11D
Message (Sheet 2 of 2)

NOTES

1. The J7.5 (ACT = 3) message is translated from the M.11D(TR=1) message.
All other J7.5 messages are translated from the M.9A(AC=9) message.

TABLE C.5.2-J7.7. J7.7 Message Data Element Translation from Link 11/11B (Sheet 1 of 2)

Link 16					Link 11/11B		
<u>WORD</u> J7.7I	<u>DATA ELEMENT</u> WORD FORMAT	<u>TRANSLATION</u>			<u>FIELD</u> NA	<u>VALUE</u> NA	<u>NOTES</u>
		<u>VALUE</u> 0	<u>REQUIRED</u> None	<u>MESSAGE</u> NA			
	LABEL, J-SERIES	7	CR	M.9B	LABEL	9	
	SUBLABEL, J-SERIES	7	CR	M.9B	SUBLABEL	1	
	MESSAGE LENGTH INDICATOR	AR	None	NA	NA	NA	G3
	ACTION, ASSOCIATION	AT	CR	M.9B	ACTION	6 or 15	1
	TRACK NUMBER, SUBJECT	AT	CR	M.9B	TRACK NUMBER ONE	RX	G13
	TRACK NUMBER, ASSOCIATED	AT	CR	M.9B	TRACK NUMBER TWO	RX	G13

APPENDIX C

TABLE C.5.2-J7.7. J7.7 Message Data Element Translation from Link 11/11B
(Sheet 2 of 2)

NOTES

1. The M.9B(AC=6) message is forwarded as a J7.7 (ACT = 0) message. The M.9B(AC=15) message is forwarded as both a J7.7 (ACT = 1) message and a J10.6 (ACT = 15) message.

TABLE C.5.2-J9.0-1. J9.0 Message Data Element Translation from the M.9E/M.10A Message (Sheet 1 of 3)

Link 16					Link 11/11B		
WORD	DATA ELEMENT	VALUE	TRANSLATION		FIELD	VALUE	NOTES
J9.0I	WORD FORMAT	0	None	MESSAGE	NA	NA	
	LABEL, J-SERIES	9	CR	M.10A	LABEL	10	1
	SUBLABEL, J-SERIES	0	CR	M.10A	SUBLABEL	0	
	MESSAGE LENGTH INDICATOR	AR	None	NA	NA	NA	G3
	TRACK NUMBER, ADDRESSEE	AT	CR	M.10A	PU/RU ADDRESSEE	RX	G12
	COMMAND	AT	CR	M.10A	ORDER	RX	2
	THREAT WARNING CONDITION	0	None	NA	NA	NA	
	WEAPON TYPE	0	None	NA	NA	NA	
	TRACK NUMBER, OBJECTIVE	AT	CR	M.10A	TRACK NUMBER TWO	RX	G13
	EXERCISE INDICATOR	0	None	NA	NA	NA	
	RECEIPT/COMPLIANCE	AT	CR	M.10A	RECEIPT/COMPLIANCE CANTPRO AMP	RX RX	3, G15
	RECURRENCE RATE, RECEIPT/ COMPLIANCE	AR	None	NA	NA	NA	
J9.0E0	WORD FORMAT	2	None	NA	NA	NA	
	DUTY ASSIGNMENT	63	None	NA	NA	NA	
	COMMAND MISSION	31	None	NA	NA	NA	
	NUMBER OF AIRCRAFT	63	None	NA	NA	NA	
	THREAT WARNING ENVIRONMENT	0	None	NA	NA	NA	
	DUTY ASSIGNMENT FUNCTIONAL AREA	0	None	NA	NA	NA	
	TRACK NUMBER, FRIENDLY WEAPON	AT	CR	M.10A	TRACK NUMBER ONE	RX	G13
J9.0C1	WORD FORMAT	1	None	NA	NA	NA	4

C-507

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J9.0-1. J9.0 Message Data Element Translation from the M.9E/M.10A Message (Sheet 2 of 3)

Link 16					Link 11/11B		
WORD J9.0C1 (Cont'd)	DATA ELEMENT CONTINUATION WORD LABEL	TRANSLATION			FIELD NA	VALUE NA	NOTES
		VALUE 1	REQUIRED None	MESSAGE NA			
	VOICE CALL SIGN	RX	CR	M.9E	ACTION VOICE CALL SIGN	1 RX	
	VOICE FREQUENCY/CHANNEL	RX	CR	M.9E	ACTION VOICE CONTROL FREQUENCY	2 RX	
	CONTROL CHANNEL	127	None	NA	NA	NA	
	SECURE RADIO INDICATOR	0	None	NA	NA	NA	
	VOICE FREQUENCY/CHANNEL INDICATOR	0	None	NA	NA	NA	

APPENDIX C

TABLE C.5.2-J9.0-1. J9.0 Message Data Element Translation from the M.9E/M.10A Message (Sheet 3 of 3)

NOTES

1. The J9.0 message may be translated from either the M.10A or M.15 message. Selected M.10A messages (Order values 2-5) will be forwarded as J9.0 messages. All M.15 messages will be forwarded as J9.0 messages.

2. The M.10A Order values will be forwarded in the J9.0 Command and Weapon System as follows:

Link 16		Link 11/11B
COMMAND	WEAPON SYSTEM	ORDER
20	0	2
21	0	3
22	17	4
22	5	5

All other M.10A Order values will be forwarded in the J10.3 Handover message.

3. The M.10A Receipt/Compliance (R/C) values, and R/C = 7 CANTPRO AMP values, will be forwarded in the J9.0 R/C field as follows:

Link 16	Link 11/11B	
RECEIPT/COMPLIANCE	RECEIPT/COMPLIANCE	CANTPRO AMP
0	0	NA
3	3	
4	4	
6	6	
7	7	0
16	7	1
17	7	2
18	7	3
19	7	4
20	7	5
21	7	6
22	7	7

4. The J9.0C1 word is only forwarded when the M.10A (R/C =0) message is followed by the M.9E (AC=1 and/or 2) message.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-J9.0-2. J9.0 Message Data Element Translation from the M.15 Message (Sheet 1 of 4)

Link 16					Link 11/11B		
WORD	DATA ELEMENT	VALUE	TRANSLATION		FIELD	VALUE	NOTES
J9.0I	WORD FORMAT	0	None	MESSAGE	NA	NA	1
	LABEL, J-SERIES	9	CR	M.15	LABEL	15	
	SUBLABEL, J-SERIES	0	CR	M.15	LABEL	15	
	MESSAGE LENGTH INDICATOR	AR	None	NA	NA	NA	G3
	TRACK NUMBER, ADDRESSEE	AT	CR	M.15	TN ADDRESSEE	RX	G12
	COMMAND	AT	CR	M.15	COMMAND	RX	2
	THREAT WARNING CONDITION	RX	=	M.15	THREAT WARNING AIR	RX	
	WEAPON TYPE	RX	=	M.15	WEAPON TYPE	RX	
	TRACK NUMBER, OBJECTIVE	AT	CR	M.15	TN TARGET/TN-2	RX	G13
	EXERCISE INDICATOR	0	None	NA	NA	NA	
	RECEIPT/COMPLIANCE	AT	CR	M.15	RECEIPT/COMPLIANCE	0, 1, 3, 4, 6, 7	G15
	RECURRENCE RATE, RECEIPT/COMPLIANCE	AR	None	NA	NA	NA	
J9.0E0	WORD FORMAT	2	None	NA	NA	NA	
	DUTY ASSIGNMENT	RX	=	M.15	COMMAND DUTY ASSIGNMENT	RX RX	3
	COMMAND MISSION	AT	CR	M.15	COMMAND TN WEAPON SYSTEM/TN-1/ORIGINATOR	RX RX	4, G15
	NUMBER OF AIRCRAFT	63	None	NA	NA	NA	
	THREAT WARNING ENVIRONMENT	0	None	NA	NA	NA	
	DUTY ASSIGNMENT FUNCTIONAL AREA	RX	=	M.15	COMMAND DUTY ASSIGNMENT FUNCTIONAL AREA	RX RX	3

C-511

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J9.0-2. J9.0 Message Data Element Translation from the M.15 Message (Sheet 2 of 4)

Link 16					Link 11/11B		
WORD	DATA ELEMENT	TRANSLATION			FIELD	VALUE	NOTES
		VALUE	REQUIRED	MESSAGE			
J9.0E0 (Cont'd)	TRACK NUMBER, FRIENDLY WEAPON	AT	CR	M.15	COMMAND TN WEAPON SYSTEM/TN- 1/ORIGINATOR	RX RX	6, G13
J9.0C1	NOT TRANSLATED						
J9.0C2	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	2	AT	M.15	COMMAND	20	
	HOUR	0	None	NA	NA	NA	7
	MINUTE	RX	=	M.15	IMPACT TIME	RX	7
	SECOND	0	None	NA	NA	NA	
	NUMBER OF MISSILES	RX	=	M.15	NUMBER OF MISSILES	RX	7

APPENDIX C

TABLE C.5.2-J9.0-2. J9.0 Message Data Element Translation from the M.15 Message (Sheet 3 of 4)

NOTES

1. The J9.0 message may be translated from either the M.10A message or M.15 message. Selected M.10A messages (Order values 2-5) will be forwarded as J9.0 messages. All M.15 messages will be forwarded as J9.0 messages.
2. If the Command value in the M.15 message equals 0-2, 4-8, or 14-19 the identical values will be reported for the Command value in the J9.0 message. When the M.15 message Command value is 3 (Investigate/Assign), the J9.0 message Command value 3 (Assign) or 23 (Investigate/Interrogate) will be determined by Weapon Type. If the Weapon Type is 1 (Aircraft), Command value 23 will be transmitted. If Weapon Type is 0 (Any/All Weapon Systems), 2 (Missile), or 3 (Conventional), then Command value 3 will be transmitted. If the M.15 Command Value is 20, the J9.0 Command Value 27 shall be forwarded.
3. If the M.15 Command value is 18 or 19, the M.15 Duty Assignment Functional Area and Duty Assignment fields will be reported as identical values on Link 16 in the J9.0 Duty Assignment Functional Area and Duty Assignment fields. If the Command value is other than 18 or 19, the Duty Assignment is set to No Statement.
4. If the M.15 Command value is 16 or 17, the J9.0 Command Mission equates to M.15 TN Weapon System/TN-1/Originator in accordance with General Note 15. If the Command value is other than 16 or 17, set Command Mission to No Statement.
5. Not Used.
6. If the M.15 Command value is 0-11, the M.15 TN Weapon System/TN-1/Originator will be the Track Number of the weapon system specified on Link 11 and will be reported as identical values on Link 16 in the J9.0 Track Number, Friendly Weapon field. On Link 11B, the M.15 TN Weapon System/TN-1/Originator will be the Track Number of the originator of the message and No

APPENDIX C

TABLE C.5.2-J9.0-2. J9.0 Message Data Element Translation from the M.15
Message (Sheet 4 of 4)

NOTES (Continued)

6. (Continued)

Statement will be reported on Link 16 in the J9.0 Track Number, Friendly
Weapon field.

7. If the M.15 Command value is 20, the M.15 Number of Missiles and Impact
Time fields will be reported as identical values on Link 16 in the J9.0
Number of Missiles and Minute fields, and the J9.0 Hour field shall be set as
follows: if the Impact Time is No Statement then use No Statement; if the
minutes given by the Impact Time exceed the Forwarding Unit's system actual
minutes, then use the system actual hour; if the minutes given are less than
or equal to Forwarding Unit's system actual minutes, then use the system
actual hour plus 1. If the Command value is other than 20, then set Hour and
Minute to No Statement and Number of Missiles to All Available.

TABLE C.5.2-J10.2. J10.2 Message Data Element Translation from Link 11/11B (Sheet 1 of 2)

Link 16					Link 11/11B		
<u>WORD</u>	<u>DATA ELEMENT</u>	<u>TRANSLATION</u>			<u>FIELD</u>	<u>VALUE</u>	<u>NOTES</u>
		<u>VALUE</u>	<u>REQUIRED</u>	<u>MESSAGE</u>			
J10.2I	WORD FORMAT	0	None	NA	NA	NA	
	LABEL, J-SERIES	10	CR	M.14	LABEL	14	
	SUBLABEL, J-SERIES	2	CR	M.14	LABEL	14	
	MESSAGE LENGTH INDICATOR	AR	None	NA	NA	NA	G3
	TRACK NUMBER, REFERENCE	AT	CR	M.14	TN FRIENDLY WEAPON SYSTEM	RX	G13
	TRACK NUMBER, TARGET	AT	CR	M.14	TN TARGET	RX	G13
	WEAPON SYSTEM	AT	CR	M.14	WEAPON TYPE	RX	1
	WEAPON ENGAGEMENT STATUS	AT	CR	M.14	WEAPON/ENGAGEMENT STATUS	RX	2
					WEAPON TYPE	RX	
J10.2C1	NOT TRANSLATED						
J10.2C2	NOT TRANSLATED						

C-515

APPENDIX C

TABLE C.5.2-J10.2. J10.2 Message Data Element Translation from Link 11/11B
(Sheet 2 of 2)

NOTES

1. If the M.14 message Weapon Type (WT) values 0-9 are used, the identical values will be used in the J10.2 Weapon System. When M.14 WT = 10 (Air-to-Surface Missile) is received, the J10.2 Weapon System = 18 (Air-to-Surface Missile) will be forwarded.
2. The M.14 message Weapon/Engagement Status (W/ES)=0 or 1 will be forwarded to the J13 series message. When the M.14 W/ES=2 (Investigating) and the Weapon Type=3, 5, or 9 is received, the J10.2 WES = 11 (Investigating) will be forwarded. All other W/ES values will be reported as identical values in the J10.2 message.

TABLE C.5.2-J10.3. J10.3 Message Data Element Translation from Link 11/11B (Sheet 1 of 4)

Link 16					Link 11/11B		
WORD	DATA ELEMENT	TRANSLATION			FIELD	VALUE	NOTES
		VALUE	REQUIRED	MESSAGE			
J10.3I	WORD FORMAT	0	None	NA	NA	NA	
	LABEL, J-SERIES	10	CR	M.10A	LABEL	10	
	SUBLABEL, J-SERIES	3	CR	M.10A	SUBLABEL	0	1
	MESSAGE LENGTH INDICATOR	AR	None	NA	NA	NA	G3
	TRACK NUMBER, ADDRESSEE	AT	CR	M.10A	PU/RU ADDRESSEE	RX	G12
	TRACK NUMBER, REFERENCE	AT	CR	M.10A	TRACK NUMBER ONE	RX	G13
	REQUEST FOR ASSUME CONTROL	AT	CR	M.10A	ORDER	RX	1
	CANCELLATION INDICATOR	RX	=	M.10A	ORDER/CANCELLATION INDICATOR	RX	
	RECEIPT/COMPLIANCE	AT	CR	M.10A	RECEIPT/COMPLIANCE CANTPRO AMP	RX RX	2, G15
	RECURRENCE RATE, RECEIPT/ COMPLIANCE	AR	None	NA	NA	NA	
J10.3E0	WORD FORMAT	2	None	NA	NA	NA	
	TRACK NUMBER, OBJECTIVE	AT	CR	M.10A	TRACK NUMBER TWO ORDER	RX RX	3
	LINK 4A ADDRESS	RX	CR	M.9E	ACTION LINK 4A ADDRESS	0 RX	4
	VOICE CALL SIGN	RX	CR	M.9E	ACTION VOICE CALL SIGN	1 RX	4
J10.3C1	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	1	None	NA	NA	NA	
	CONTROL CHANNEL	127	None	NA	NA	NA	
	VOICE FREQUENCY/CHANNEL INDICATOR	0	None	NA	NA	NA	

C-517

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J10.3. J10.3 Message Data Element Translation from Link 11/11B (Sheet 2 of 4)

WORD	Link 16			Link 11/11B		
	DATA ELEMENT	TRANSLATION			FIELD	NOTES
	VOICE FREQUENCY/CHANNEL	VALUE	REQUIRED	MESSAGE	ACTION	
J10.3C1		AT	CR	M.9E	VOICE CONTROL	2
(Cont'd)					FREQUENCY	RX
	LINK 4A FREQUENCY	AT	CR	M.9E	ACTION	4
					LINK 4A CONTROL	RX
					FREQUENCY	
	MODE III CODE	0	None	NA	NA	NA
	SQUAWK FLASH INDICATOR	0	None	NA	NA	NA
	RADIO TYPE	0	None	NA	NA	NA
	SECURE RADIO INDICATOR	0	None	NA	NA	NA
J10.3C2	NOT TRANSLATED					

APPENDIX C

TABLE C.5.2-J10.3. J10.3 Message Data Element Translation from Link 11/11B
(Sheet 3 of 4)

NOTES

1. Request for Assume Control values 0 and 1 translate directly from the M.10A message. Request for Assume Control value 2 translates directly from an M.10A(Order=6) message. All other M.10A message Order values translate to J9.0 messages.
2. The M.10A Receipt/Compliance (R/C) values, and R/C = 7 CANTPRO AMP values, will be forwarded in the J10.3 R/C field as follows:

Link 16	Link 11/11B	
RECEIPT/COMPLIANCE	RECEIPT/COMPLIANCE	CANTPRO AMP
0	0	NA
3	3	
4	4	
6	6	
7	7	0
16	7	1
17	7	2
18	7	3
19	7	4
20	7	5
21	7	6
22	7	7

3. M.10A message with R/C = 3, 6, or 7 received from Link 11B, and any M.10A (Order =6) message, will have the address of the originating unit in the M.10A message TN-2 field. In these cases the forwarded Objective Track Number in the J10.3E0 word will be set to zero and not the received M.10A message TN-2 value.
4. One or more M.9E messages with information related to the controlled unit may be received following an M.10A (Order = 6, R/C =0) message or M.10A (Order =0 or 1, R/C = 3) message. Different M.9E messages may be expected following an M.10A message with R/C value of Original Order or WILCO. The FJU shall forward only the M.9E message derived information that is received following the current M.10A message being forwarded.

APPENDIX C

TABLE C.5.2-J10.3. J10.3 Message Data Element Translation from Link 11/11B
(Sheet 4 of 4)

NOTES (Continued)

5. Forwarded J10.3 (Request for Assume Control = 0 or 1) WILCO replies shall include the J10.3C1 word even if no M.9E message was received following the M.10A (Order = 0 or 1) message. In this case, the Voice Frequency/Channel and/or Link 4A Frequency fields shall be forwarded as value 0.
6. The Mode III Code used in the J10.3C1 word has no relation to the Mode III Code reported in the M.11D message.
7. This word is not forwarded from Link 11/11B. The Mission Correlator of this word is not related to the Mission Number found in the M.9E(AC=6) message.
8. Forwarded J10.3 (Request for Assume Control = 2) replies (R/C = 2, 3, 6, or 7) shall include a J10.3C1 word which is identical to the J10.3C1 word received by the FJU in the original J10.3 (R/C = 0) message. Therefore, the FJU must save the original J10.3 (Request for Assume Control = 2, R/C = 0) until an M.10A reply (R/C = 3, 6, or 7) is received from the Addressee TN of the original message, or until the FJU transmits a J10.3 (Request for Assume Control = 2, R/C = 21) reply to the originator.

TABLE C.5.2-J10.5. J10.5 Message Data Element Translation from Link 11/11B (Sheet 1 of 2)

Link 16					Link 11/11B		
<u>WORD</u> J10.5I	<u>DATA ELEMENT</u> WORD FORMAT	<u>TRANSLATION</u>			<u>FIELD</u> NA	<u>VALUE</u> NA	<u>NOTES</u>
		<u>VALUE</u> 0	<u>REQUIRED</u> None	<u>MESSAGE</u> NA			
	LABEL, J-SERIES	10	CR	M.9A	LABEL	9	
	SUBLABEL, J-SERIES	5	CR	M.9A	SUBLABEL ACTION	0 6	
	MESSAGE LENGTH INDICATOR	AR	None	NA	NA	NA	G3
	TRACK NUMBER, REFERENCE	AT	CR	M.9A(AC=6)	TRACK NUMBER	RX	G13
	VOICE CALL SIGN	RX	CR	M.9E(AC=1)	VOICE CALL SIGN	RX	1
	HANDOVER INDICATOR	0	None	NA	NA	NA	
	MISSION CORRELATOR	0	None	NA	NA	NA	2
	CONTROLLING UNIT STATUS	AT	CR	M.9A(AC=6)	STATUS INDICATOR	RX	3

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-J10.5. J10.5 Message Data Element Translation from Link 11/11B
(Sheet 2 of 2)

NOTES

1. The Voice Call Sign reported in an M.9E(AC=1) message will only be accepted if it is reported by the unit currently reporting control.
2. The Mission Correlator field of the J10.5 message is not related to the Mission Number field of the M.9E(AC=6) message.
3. The M.9A(AC=6) Status Indicator is converted as follows:

Link 16	Link 11/11B
CONTROLLING UNIT STATUS	STATUS INDICATOR
0	1
1	0

TABLE C.5.2-J10.6. J10.6 Message Data Element Translation from Link 11/11B (Sheet 1 of 2)

Link 16					Link 11/11B		
<u>WORD</u> J10.6I	<u>DATA ELEMENT</u> WORD FORMAT	<u>TRANSLATION</u>			<u>FIELD</u> NA	<u>VALUE</u> NA	<u>NOTES</u>
		<u>VALUE</u> 0	<u>REQUIRED</u> None	<u>MESSAGE</u> NA			
	LABEL, J-SERIES	10	CR	M.9B	LABEL	9	
	SUBLABEL, J-SERIES	6	CR	M.9B	SUBLABEL	1	
	MESSAGE LENGTH INDICATOR	AR	None	NA	NA	NA	G3
	TRACK NUMBER, REFERENCE	AT	CR	M.9B	TRACK NUMBER ONE	RX	G13
	TRACK NUMBER, OBJECTIVE	AT	CR	M.9B	TRACK NUMBER TWO	RX	G13
	PAIRING ACTION	AT	CR	M.9B	ACTION	RX	1

APPENDIX C

TABLE C.5.2-J10.6. J10.6 Message Data Element Translation from Link 11/11B
(Sheet 2 of 2)

NOTES

1. The J10.6I message Pairing Action value is determined by the M.9B message Action as follows:

Link 16	Link 11/11B
PAIRING ACTION	ACTION
1 - GENERAL PAIRING	0 - GENERAL PAIRING
2 - INTERDICTION PAIRING	1 - STRIKE PAIRING
3 - RENDEZVOUS PAIRING	2 - RENDEZVOUS
4 - COMBAT AIR PATROL PAIRING	4 - CAP STATION PAIRING
5 - CLOSE AIR SUPPORT PAIRING	5 - CLOSE AIR SUPPORT
6 - RETURN TO BASE PAIRING	3 - RTB PAIRING
15 - TERMINATE PAIRING	15 - TERMINATE PAIRING/ ASSOCIATION

The M.9B(AC=6) message translates to the J7.7 message. The M.9B(AC=15) message is forwarded as both a J7.7 (ACT = 1) message and a J10.6 (ACT = 15) message.

TABLE C.5.2-J13.2-1. J13.2 Message Data Element Translation from the M.11B Message (Sheet 1 of 5)

Link 16					Link 11/11B		
WORD	DATA ELEMENT	TRANSLATION			FIELD	VALUE	NOTES
		VALUE	REQUIRED	MESSAGE			
J13.2I	WORD FORMAT	0	None	NA	NA	NA	
	LABEL, J-SERIES	13	CR	M.11B	LABEL	11	
	SUBLABEL, J-SERIES	2	CR	M.11B	SUBLABEL	1	
	MESSAGE LENGTH INDICATOR	AR	None	NA	NA	NA	G3
	OPERATIONAL CAPABILITY, AIRCRAFT	0	None	NA	NA	NA	
	TRACK NUMBER, REFERENCE	AT	CR	M.11B	TRACK NUMBER	RX	G13
	FUEL FUNCTION	0	None	NA	NA	NA	
	FUEL	AT	CR	M.11B	FUEL/TIME SWITCH FUEL/TIME	0 RX	1
	RADAR CHANNEL INDICATOR	0	None	NA	NA	NA	
	RADAR CHANNEL	0	None	NA	NA	NA	
	TIME REPORT FUNCTION	AT	CR	M.11B	FUEL/TIME SWITCH FUEL/TIME	1 RX	2
	MINUTE	AT	CR	M.11B	FUEL/TIME SWITCH FUEL/TIME	1 RX	2
	HOURL	AT	CR	M.11B	FUEL/TIME SWITCH FUEL/TIME	1 RX	2
J13.2C1	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	1	None	NA	NA	NA	
	RADAR STATUS	0	None	NA	NA	NA	
	INFRARED STATUS	0	None	NA	NA	NA	
	MISSILE CHANNEL	0	None	NA	NA	NA	
	LASER STATUS	0	None	NA	NA	NA	

C-525

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J13.2-1. J13.2 Message Data Element Translation from the M.11B Message (Sheet 2 of 5)

<u>WORD</u> J13.2C1 (Cont'd)	Link 16	TRANSLATION			Link 11/11B	<u>VALUE</u> NA	<u>NOTES</u>
	<u>DATA ELEMENT</u> TELEVISION STATUS	<u>VALUE</u> 0	<u>REQUIRED</u> None	<u>MESSAGE</u> NA	<u>FIELD</u> NA		
	RADAR WARNING AND RECEIVING STATUS	0	None	NA	NA	NA	
	AIR-TO-AIR WEAPON RELEASE SYSTEM STATUS	0	None	NA	NA	NA	
	AIR-TO-GROUND WEAPON RELEASE SYSTEM STATUS	0	None	NA	NA	NA	
	RADIO TYPE, 1	0	None	NA	NA	NA	
	RADIO STATUS, 1	0	None	NA	NA	NA	
	SECURE RADIO INDICATOR, 1	0	None	NA	NA	NA	
	RADIO TYPE, 2	0	None	NA	NA	NA	
	RADIO STATUS, 2	0	None	NA	NA	NA	
	SECURE RADIO INDICATOR, 2	0	None	NA	NA	NA	
	RADIO TYPE, 3	0	None	NA	NA	NA	
	RADIO STATUS, 3	0	None	NA	NA	NA	
	SECURE RADIO INDICATOR, 3	0	None	NA	NA	NA	
	AUTOPILOT STATUS	0	None	NA	NA	NA	
	SENSOR TARGET REPORTING STATUS	0	None	NA	NA	NA	
	AIRCRAFT MODEL	0	None	NA	NA	NA	
	AIR SPECIFIC TYPE	AT	CR	M.11B	AIRCRAFT TYPE	RX	3
J13.2C2	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	2	None	NA	NA	NA	

C-526

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J13.2-1. J13.2 Message Data Element Translation from the M.11B Message (Sheet 3 of 5)

WORD J13.2C2 (Cont'd)	Link 16	TRANSLATION			Link 11/11B		
	DATA ELEMENT SUMMATION INDICATOR	VALUE 0	REQUIRED None	MESSAGE NA	FIELD NA	VALUE NA	NOTES
	NUMBER OF STORES, 1	63	None	NA	NA	NA	
	TYPE OF STORES, 1	AT	CR	M.11B	WEAPON TYPE	RX	4
	NUMBER OF STORES, 2	63	None	NA	NA	NA	
	TYPE OF STORES, 2	AT	CR	M.11B	WEAPON TYPE	RX	4
	NUMBER OF STORES, 3	63	None	NA	NA	NA	
	TYPE OF STORES, 3	AT	CR	M.11B	WEAPON TYPE	RX	4
	NUMBER OF STORES, 4	63	None	NA	NA	NA	
	TYPE OF STORES, 4	AT	CR	M.11B	WEAPON TYPE	RX	4
	GUN CAPABLE	AT	CR	M.11B	ORDNANCE D	RX	5
	IFF/SIF TRANSPONDER STATUS	0	None	NA	NA	NA	
	IFF/SIF INTERROGATOR STATUS	0	None	NA	NA	NA	
J13.2C3	NOT TRANSLATED						
J13.2C4	NOT TRANSLATED						
J13.2C5	NOT TRANSLATED						
J13.2C6	NOT TRANSLATED						
J13.2C7	NOT TRANSLATED						

C-527

APPENDIX C

MIL-STD-6016B

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-J13.2-1. J13.2 Message Data Element Translation from the M.11B Message (Sheet 4 of 5)

NOTES

1. Fuel is reported in 400-pound increments in the M.11B message when the Fuel/Time Switch (FT SW) is set to zero. These reported fuel values will be translated to their directly equivalent 100-pound increment value in the J13.2 message. An M.11B message reporting 50,800 pounds or more of fuel (value 127) will be forwarded as 50,800 pounds. Fuel in the J13.2 message will be set to No Statement if Fuel in the M.11B message is reported as 0 value or if the FT SW is reported as 1.
2. Time-to-Time Off Task in minutes is reported in the M.11B message when the FT SW is set to 1. In this case the minutes will be converted directly to hours and minutes, and the Time Report Function field will be forwarded as value 4. An M.11B message with FT SW set to value 1 and Fuel/Time set to value 127 will be forwarded as two hours and six minutes. If the M.11B FT SW is received as zero, the J13.2 Time Report Function, Minute and Hour will all be forwarded as No Statement.
3. The Air Specific Type is determined from the M.11B Aircraft Type field as follows:

Link 16
AIR SPECIFIC TYPE
0 - NO STATEMENT
1 - F-4 PHANTOM II
2 - F-5 TIGER II
3 - F-8 CRUSADER
4 - F-14 TOMCAT
5 - F-15 EAGLE
6 - F-16 FIGHTING FALCON
7 - F-101 VOODOO
8 - F-104 STARFIGHTER
10 - F-106 DELTA DART
11 - F-111 (GENERAL DYNAMICS)
12 - F/A-18 HORNET
14 - F-102

Link 11/11B
AIRCRAFT TYPE
0 - NO STATEMENT
10 - A-3
12 - A-5
21-31 - UNDEFINED
1 - F-4
20 - F-5
2 - F-8
3 - F-14
4 - F-15
17 - F-16
5 - F-101
7 - F-104
8 - F-106
9 - F-111
18 - F-18
6 - F-102

APPENDIX C

TABLE C.5.2-J13.2-1. J13.2 Message Data Element Translation from the M.11B Message (Sheet 5 of 5)

NOTES (Continued)

3. (Continued)

Link 16	Link 11/11B
AIR SPECIFIC TYPE	AIRCRAFT TYPE
256 - A-4 SKYHAWK	11 - A-4
257 - A-6 INTRUDER	13 - A-6
258 - A-7 CORSAIR II	14 - A-7
259 - A-10 THUNDERBOLT II	16 - A-10
264 - AV-8 HARRIER	15 - AV-8
265 - F/A-18 HORNET	19 - A-18

4. The M.11B Weapon Type provides the capability to show the simple presence or absence of a particular group of air-to-air weapons. The J13.2 message indicates a specific type of weapon in a Type of Stores field and the quantity of that weapon being carried in the related Number of Stores field. Any one of the Type of Stores fields may be selected by the FJU to forward each associated weapon type. Bit 32 of the M.11B will be ignored for data forwarding purposes. If bits 33-35 are all zero, the J13.2 Type of Stores 1, 2, 3, and 4 will be forwarded as No Statement. If bit 33 is received as 1, Type of Stores value = 1 will be forwarded. If bit 34 is received as 1, Type of Stores value = 2 will be forwarded. If bit 35 is received as 1, Type of Stores value = 3 will be forwarded.

5. Gun Capable is determined from the M.11B Ordnance D Field as follows:

Link 16	Link 11/11B
GUN CAPABLE	ORDNANCE D
0	0
	1
1	2
	3

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-J13.2-2. J13.2 Message Data Element Translation from the M.11C Message (Sheet 1 of 7)

Link 16					Link 11/11B		
WORD	DATA ELEMENT	VALUE	TRANSLATION		FIELD	VALUE	NOTES
J13.2I	WORD FORMAT	0	REQUIRED	MESSAGE	NA	NA	
	LABEL, J-SERIES	13	CR	M.11C	LABEL	11	
	SUBLABEL, J-SERIES	2	CR	M.11C	SUBLABEL	2	
	MESSAGE LENGTH INDICATOR	AR	None	NA	NA	NA	G3
	OPERATIONAL CAPABILITY, AIRCRAFT	0	None	NA	NA	NA	
	TRACK NUMBER, REFERENCE	AT	CR	M.11C	TRACK NUMBER	RX	G13
	FUEL FUNCTION	0	None	NA	NA	NA	
	FUEL	AT	CR	M.11C	B-FRAME SWITCH FUEL	2 RX	1
	RADAR CHANNEL INDICATOR	0	None	NA	NA	NA	
	RADAR CHANNEL	0	None	NA	NA	NA	
	TIME REPORT FUNCTION	AT	CR	M.11C	TIME REMAINING	RX	2
	MINUTE	AT	CR	M.11C	TIME REMAINING	RX	2
	HOURL	AT	CR	M.11C	TIME REMAINING	RX	2
J13.2C1	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	1	None	NA	NA	NA	
	RADAR STATUS	0	None	NA	NA	NA	
	INFRARED STATUS	0	None	NA	NA	NA	
	MISSILE CHANNEL	0	None	NA	NA	NA	
	LASER STATUS	0	None	NA	NA	NA	
	TELEVISION STATUS	0	None	NA	NA	NA	

TABLE C.5.2-J13.2-2. J13.2 Message Data Element Translation from the M.11C Message (Sheet 2 of 7)

Link 16				Link 11/11B			
WORD	DATA ELEMENT	VALUE	TRANSLATION		FIELD	VALUE	NOTES
			REQUIRED	MESSAGE			
J13.2C1 (Cont'd)	RADAR WARNING AND RECEIVING STATUS	0	None	NA	NA	NA	
	AIR-TO-AIR WEAPON RELEASE SYSTEM STATUS	0	None	NA	NA	NA	
	AIR-TO-GROUND WEAPON RELEASE SYSTEM STATUS	0	None	NA	NA	NA	
	RADIO TYPE, 1	0	None	NA	NA	NA	
	RADIO STATUS, 1	0	None	NA	NA	NA	
	SECURE RADIO INDICATOR, 1	0	None	NA	NA	NA	
	RADIO TYPE, 2	0	None	NA	NA	NA	
	RADIO STATUS, 2	0	None	NA	NA	NA	
	SECURE RADIO INDICATOR, 2	0	None	NA	NA	NA	
	RADIO TYPE, 3	0	None	NA	NA	NA	
	RADIO STATUS, 3	0	None	NA	NA	NA	
	SECURE RADIO INDICATOR, 3	0	None	NA	NA	NA	
	AUTOPILOT STATUS	0	None	NA	NA	NA	
	SENSOR TARGET REPORTING STATUS	0	None	NA	NA	NA	
	AIRCRAFT MODEL	AT	CR	M.11C	B-FRAME SWITCH AIRCRAFT TYPE	1 RX	3
	AIR SPECIFIC TYPE	AT	CR	M.11C	B-FRAME SWITCH AIRCRAFT TYPE	1 RX	3
	J13.2C2	NOT TRANSLATED					
J13.2C3	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	3	None	NA	NA	NA	

C-532

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J13.2-2. J13.2 Message Data Element Translation from the M.11C Message (Sheet 3 of 7)

Link 16				Link 11/11B			
WORD	DATA ELEMENT	VALUE	TRANSLATION		FIELD	VALUE	NOTES
			REQUIRED	MESSAGE			
J13.2C3 (Cont'd)	CONVENTIONAL DEPTH BOMB INVENTORY	RX	=	M.11C	CONVENTIONAL DEPTH BOMB INVENTORY	RX	4
	SPECIAL DEPTH BOMB INVENTORY	RX	=	M.11C	SPECIAL DEPTH BOMB INVENTORY	RX	4
	CONVENTIONAL TORPEDO INVENTORY	RX	=	M.11C	CONVENTIONAL TORPEDO INVENTORY	RX	4
	SPECIAL TORPEDO INVENTORY	RX	=	M.11C	SPECIAL TORPEDO INVENTORY	RX	4
	CONVENTIONAL MISSILE INVENTORY	RX	=	M.11C	CONVENTIONAL MISSILE INVENTORY	RX	4
	SPECIAL MISSILE INVENTORY	RX	=	M.11C	SPECIAL MISSILE INVENTORY	RX	4
	ROCKET INVENTORY	RX	=	M.11C	ROCKET INVENTORY	RX	4
	ACTIVE SONOBUOY INVENTORY	RX	=	M.11C	ACTIVE SONOBUOY INVENTORY	RX	4
	PASSIVE SONOBUOY INVENTORY	RX	=	M.11C	PASSIVE SONOBUOY INVENTORY	RX	4
	RADAR STATUS INDICATOR	RX	=	M.11C	SENSOR STATUS	RX	5
	ELECTRONIC WARFARE SUPPORT, STATUS	RX	=	M.11C	SENSOR STATUS	RX	5
	INFRARED STATUS INDICATOR	RX	=	M.11C	SENSOR STATUS	RX	5
	LOW FREQUENCY ANALYSIS AND RECORDING STATUS	RX	=	M.11C	SENSOR STATUS	RX	5
	MAGNETIC ANOMALY DETECTOR STATUS	RX	=	M.11C	SENSOR STATUS	RX	5
	SEARCH LIGHT STATUS	RX	=	M.11C	SENSOR STATUS	RX	5
	LOW LIGHT LEVEL TELEVISION STATUS	RX	=	M.11C	SENSOR STATUS	RX	5

C-533

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J13.2-2. J13.2 Message Data Element Translation from the M.11C Message (Sheet 4 of 7)

WORD	Link 16				Link 11/11B		
	DATA ELEMENT	VALUE	TRANSLATION		FIELD	VALUE	NOTES
	DIFAR/CODAR STATUS	RX	=	REQUIRED MESSAGE	SENSOR STATUS	RX	5
J13.2C3 (Cont'd)	ACTIVE SONOBUOY STATUS	RX	=	M.11C	SENSOR STATUS	RX	5
	RECORDER STATUS, 1	RX	=	M.11C	SENSOR STATUS	RX	5
	RECORDER STATUS, 2	RX	=	M.11C	SENSOR STATUS	RX	5
	RECORDER STATUS, 3	RX	=	M.11C	SENSOR STATUS	RX	5
	RECORDER STATUS, 4	RX	=	M.11C	SENSOR STATUS	RX	5
	SONAR STATUS	RX	=	M.11C	SENSOR STATUS	RX	5
	SPECIAL SONOBUOY STATUS, 1	RX	=	M.11C	SENSOR STATUS	RX	5
	SPECIAL SONOBUOY STATUS, 2	RX	=	M.11C	SENSOR STATUS	RX	5
	SPECIAL PROCESSOR STATUS, 1	RX	=	M.11C	SENSOR STATUS	RX	5
	SPECIAL PROCESSOR STATUS, 2	RX	=	M.11C	SENSOR STATUS	RX	5
	RADAR WATCH ALTITUDE	AT	CR	M.11C	ALTITUDE FOR WATCH	RX	6
J13.2C4	NOT TRANSLATED						
J13.2C5	NOT TRANSLATED						
J13.2C6	NOT TRANSLATED						
J13.2C7	NOT TRANSLATED						

C-534

APPENDIX C

TABLE C.5.2-J13.2-2. J13.2 Message Data Element Translation from the M.11C Message (Sheet 5 of 7)

NOTES

1. If the B-Frame Switch is set to 2, Fuel is reported in 400-pound increments in the M.11C message. These reported Fuel values will be translated to their directly equivalent 100-pound increment values in the J13.2 message. An M.11C message reporting 50,800 pounds or more of fuel (value 127) will be forwarded as 50,800 pounds. Fuel in the J13.2 message will be set to No Statement if the M.11C Fuel value is zero or if the M.11C message reporting fuel is not received.

2. Time Report Function (TRF), Hour, and Minute are determined from the M.11C Time Remaining field as follows:

<u>Link 16</u>			<u>Link 11</u>
<u>TIME REPORT</u>			
<u>FUNCTION</u>	<u>HOUR</u>	<u>MINUTE</u>	<u>TIME REMAINING</u>
0	31 - NO STATEMENT	63 - NO STATEMENT	0 - NO STATEMENT
	Current Time Plus		1 - RETURNING TO BASE
5	0	15	2 - ENROUTE TO STATION
		30	3 - 0 THROUGH 15 MINUTES
		45	4 - 16 THROUGH 30 MINUTES
	1	0	5 - 31 THROUGH 45 MINUTES
	1	30	6 - 46 MINUTES THROUGH 1 HOUR
	2	0	7 - LONGER THAN 1 HOUR THROUGH 1.5 HOURS
			8 - LONGER THAN 1.5 HOURS THROUGH 2 HOURS
	2	30	9 - LONGER THAN 2 HOURS THROUGH 2.5 HOURS

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-J13.2-2. J13.2 Message Data Element Translation from the M.11C Message (Sheet 6 of 7)

NOTES (Continued)

2. (Continued)

Link 16			Link 11
TIME REPORT			
FUNCTION	HOUR	MINUTE	TIME REMAINING
	3	0	10 - LONGER THAN 2.5 HOURS THROUGH 3 HOURS
	4	0	11 - LONGER THAN 3 HOURS THROUGH 4 HOURS
	6	0	12 - LONGER THAN 4 HOURS THROUGH 6 HOURS
	8	0	13 - LONGER THAN 6 HOURS THROUGH 8 HOURS
	10	0	14 - LONGER THAN 8 HOURS THROUGH 10 HOURS
	10	1	15 - LONGER THAN 10 HOURS

3. The M.11C Aircraft Type values will be forwarded in the J13.2 Aircraft Model and Air Specific Type as follows:

Link 16		Link 11
AIR SPECIFIC TYPE	AIRCRAFT MODEL	AIRCRAFT TYPE
0 - NO STATEMENT	0 - NO STATEMENT	0 - NO STATEMENT
533 - P-3 ORION	2 - B	13-15 - UNDEFINED
543 - S-2 TRACKER	3 - C	2 - P-3A/P-3B
544 - S-3 VIKING	5 - E	3 - P-3C
563 - BR 1150 ATL1	0 - NO STATEMENT	6 - S-2E
568 - CP-140 AURORA	0 - NO STATEMENT	7 - S-3
570 - HS.801 NIMROD	0 - NO STATEMENT	11 - BREGUET ATLANTIQUE
765 - ASW	0 - NO STATEMENT	12 - AURORA
		4 - NIMROD
		1 - MARITIME PATROL AIRCRAFT
		5 - VS (FW, ASW GENERAL)

APPENDIX C

TABLE C.5.2-J13.2-2. J13.2 Message Data Element Translation from the M.11C Message (Sheet 7 of 7)

NOTES (Continued)

3. (Continued)

<u>Link 16</u>		<u>Link 11</u>
<u>AIR SPECIFIC TYPE</u>	<u>AIRCRAFT MODEL</u>	<u>AIRCRAFT TYPE</u>
1535 - HELICOPTER GENERAL	0 - NO STATEMENT	8 - ASW HELO (GENERAL) 9 - ASW HELO (DIPPING) 10 - ASW HELO (WEAPON CARRIER)

4. When the M.11C B-Frame Switch=0, 2, or 3, forward all noted fields as value 0.

5. When the M.11C B-Frame Switch=1, 2, or 3, forward all noted fields as value 0.

6. Radar Watch Altitude of the J13.2 message reports the best altitude for radar watch in 100-foot increments. The Altitude for Watch of the M.11C message reports the same information in 500-foot increments. The M.11C value will be translated to the directly equivalent value in the J13.2 message. Example: M.11C value 5 (2,500 Feet) is translated to value 25 (2,500 Feet) in the J13.2 message. When the M.11C message is received with value 0 (No Statement), the J13.2 Radar Watch Altitude value 511 (No Statement) will be forwarded. When the M.11C B-Frame Switch=2 is not received, forward Radar Watch Altitude of No Statement.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-J13.2-3. J13.2 Message Data Element Translation from the M.14 Message (Sheet 1 of 2)

Link 16					Link 11/11B		
WORD	DATA ELEMENT	VALUE	TRANSLATION		FIELD	VALUE	NOTES
J13.2I	WORD FORMAT	0	None	MESSAGE	NA	NA	
	LABEL, J-SERIES	13	CR	M.14	LABEL	14	
	SUBLABEL, J-SERIES	2	CR	M.14	LABEL	14	
	MESSAGE LENGTH INDICATOR	AR	None	NA	NA	NA	G3
	OPERATIONAL CAPABILITY, AIRCRAFT	AT	CR	M.14	WEAPON/ENGAGEMENT STATUS	RX	1
	TRACK NUMBER, REFERENCE	AT	CR	M.14	TN FRIENDLY WEAPON SYSTEM	RX	G13
	FUEL FUNCTION	0	None	NA	NA	NA	
	FUEL	4095	None	NA	NA	NA	2
	RADAR CHANNEL INDICATOR	0	None	NA	NA	NA	
	RADAR CHANNEL	0	None	NA	NA	NA	
	TIME REPORT FUNCTION	0	None	NA	NA	NA	2
	MINUTE	63	None	NA	NA	NA	2
	HOUR	31	None	NA	NA	NA	2
J13.2C1	NOT TRANSLATED						
J13.2C2	NOT TRANSLATED						
J13.2C3	NOT TRANSLATED						
J13.2C4	NOT TRANSLATED						
J13.2C5	NOT TRANSLATED						
J13.2C6	NOT TRANSLATED						
J13.2C7	NOT TRANSLATED						

C-539

APPENDIX C

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-J13.2-3. J13.2 Message Data Element Translation from the M.14 Message (Sheet 2 of 2)

NOTES

1. The Operational Capability, Aircraft shall be determined from the M.14 Weapon/Engagement Status as follows:

<u>Link 16</u>	<u>Link 11/11B</u>
<u>OPERATIONAL CAPABILITY, AIRCRAFT</u>	<u>WEAPON/ENGAGEMENT STATUS</u>
1	0
3	1

2. These data are not translated from the M.14 message. The Data Forwarder shall not combine data previously received in M.11B or M.11C messages in this translation since the currency of that data cannot be assured.

TABLE C.5.2-J13.3. J13.3 Message Data Element Translation from the M.14 Message (Sheet 1 of 3)

Link 16					Link 11/11B		
WORD	DATA ELEMENT	VALUE	TRANSLATION		FIELD	VALUE	NOTES
J13.3I	WORD FORMAT	0	None	MESSAGE	NA	NA	1
	LABEL, J-SERIES	13	CR	M.14	LABEL	14	
	SUBLABEL, J-SERIES	3	CR	M.14	LABEL	14	
	MESSAGE LENGTH INDICATOR	AR	None	NA	NA	NA	G3
	TRACK NUMBER, REFERENCE	AT	CR	M.14	TN FRIENDLY WEAPON SYSTEM	RX	G13
	FLIGHT DECK STATUS	0	None	NA	NA	NA	
	LANDING APPROACH CONDITION	0	None	NA	NA	NA	
	TIME REPORT FUNCTION	0	None	NA	NA	NA	
	MINUTE	63	None	NA	NA	NA	
	HOUR	31	None	NA	NA	NA	
	SURFACE (MARITIME) SPECIFIC TYPE	0	None	NA	NA	NA	
J13.3C1	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	1	None	NA	NA	NA	
	MISSILE TYPE, 1	AT	CR	M.14	WEAPON TYPE WEAPON RANGE	RX RX	2
	OPERATIONAL MISSILE INVENTORY, 1	AT	CR	M.14	HOT INVENTORY	RX	3
	NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 1	AT	CR	M.14	NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE	RX	4
	MISSILE TYPE, 2	0	None	NA	NA	NA	
	OPERATIONAL MISSILE INVENTORY, 2	127	None	NA	NA	NA	

C-541

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J13.3. J13.3 Message Data Element Translation from the M.14 Message (Sheet 2 of 3)

Link 16					Link 11/11B		
WORD	DATA ELEMENT	VALUE	TRANSLATION		FIELD	VALUE	NOTES
			REQUIRED	MESSAGE			
J13.3C1 (Cont'd)	NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 2	15	None	NA	NA	NA	
	MISSILE TYPE, 3	0	None	NA	NA	NA	
	OPERATIONAL MISSILE INVENTORY, 3	127	None	NA	NA	NA	
	NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 3	15	None	NA	NA	NA	
	FUEL FUNCTION	0	None	NA	NA	NA	
	FUEL, SURFACE (MARITIME)	0	None	NA	NA	NA	
J13.3C2	NOT TRANSLATED						
J13.3C3	NOT TRANSLATED						
J13.3C4	NOT TRANSLATED						

C-542

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-J13.3. J13.3 Message Data Element Translation from the M.14 Message (Sheet 3 of 3)

NOTES

1. The J13.3 message may be derived only from the M.14 message.
2. The M.14 Weapon Type and Weapon Range will be forwarded in the J13.3 Missile Type, 1 as follows:

Link 16	Link 11/11B	
MISSILE TYPE, 1	WEAPON TYPE	WEAPON RANGE
0	ANY NOT LISTED BELOW	ANY NOT LISTED BELOW
1	1	1
2	1	2
3	1	3
4	2	1
5	2	2
6	2	3
12	11	1
13	11	2
14	11	3
15	12	1
16	12	2
17	12	3

3. The M.14 Hot Inventory will be forwarded in the J13.3 Operational Missile Inventory, 1 as follows:

Link 16	Link 11/11B
OPERATIONAL MISSILE INVENTORY, 1	HOT INVENTORY
1-125	1-125
126	126, 127
127	0

4. The J13.3 Number of Fire Control Systems Available, 1 is determined from the M.14 Number of Fire Control Systems Available as follows:

Link 16	Link 11/11B
NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 1	NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE
1	1
2	2
3	3
15	0

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-J13.4. J13.4 Message Data Element Translation from the M.14 Message (Sheet 1 of 3)

Link 16					Link 11/11B		
WORD	DATA ELEMENT	VALUE	TRANSLATION		FIELD	VALUE	NOTES
J13.4I	WORD FORMAT	0	None	MESSAGE	NA	NA	1
	LABEL, J-SERIES	13	CR	M.14	LABEL	14	
	SUBLABEL, J-SERIES	4	CR	M.14	LABEL	14	
	MESSAGE LENGTH INDICATOR	AR	None	NA	NA	NA	G3
	TRACK NUMBER, REFERENCE	AT	CR	M.14	TN FRIENDLY WEAPON SYSTEM	RX	G13
	SUBSURFACE (MARITIME) SPECIFIC TYPE	0	None	NA	NA	NA	
J13.4C1	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	1	None	NA	NA	NA	
	MISSILE TYPE, 1	AT	CR	M.14	WEAPON TYPE WEAPON RANGE	RX RX	2
	OPERATIONAL MISSILE INVENTORY, 1	AT	CR	M.14	HOT INVENTORY	RX	3
	MISSILE TYPE, 2	0	None	NA	NA	NA	
	OPERATIONAL MISSILE INVENTORY, 2	127	None	NA	NA	NA	
	MISSILE TYPE, 3	0	None	NA	NA	NA	
	OPERATIONAL MISSILE INVENTORY, 3	127	None	NA	NA	NA	
	TORPEDO TYPE, 1	0	None	NA	NA	NA	
	TORPEDO INVENTORY, 1	7	None	NA	NA	NA	
	TORPEDO TYPE, 2	0	None	NA	NA	NA	
	TORPEDO INVENTORY, 2	7	None	NA	NA	NA	
	TORPEDO TUBE	0	None	NA	NA	NA	

C-545

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J13.4. J13.4 Message Data Element Translation from the M.14 Message (Sheet 2 of 3)

Link 16					Link 11/11B		
<u>WORD</u>	<u>DATA ELEMENT</u>	<u>TRANSLATION</u>			<u>FIELD</u>	<u>VALUE</u>	<u>NOTES</u>
		<u>VALUE</u>	<u>REQUIRED</u>	<u>MESSAGE</u>			
J13.4C1 (Cont'd)	VERTICAL LAUNCHER	0	None	NA	NA	NA	
	FIRE CONTROL SYSTEM	0	None	NA	NA	NA	
J13.4C2	NOT TRANSLATED						

APPENDIX C

TABLE C.5.2-J13.4. J13.4 Message Data Element Translation from the M.14 Message (Sheet 3 of 3)

NOTES

1. The J13.4 message may be derived only from the M.14 message.
2. The M.14 Weapon Type and Weapon Range will be forwarded in the J13.4 Missile Type, 1 as follows:

Link 16	Link 11/11B	
MISSILE TYPE, 1	WEAPON TYPE	WEAPON RANGE
0	(Any not listed below)	(Any not listed below)
1	1	1
2	1	2
3	1	3
4	2	1
5	2	2
6	2	3
12	11	1
13	11	2
14	11	3
15	12	1
16	12	2
17	12	3

3. The M.14 Hot Inventory will be forwarded in the J13.4 Operational Missile Inventory, 1 as follows:

Link 16	Link 11/11B
OPERATIONAL MISSILE INVENTORY, 1	HOT INVENTORY
1 - 125	1 - 125
126	126, 127
127	0

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-J13.5. J13.5 Message Data Element Translation from the M.14 Message (Sheet 1 of 4)

Link 16				Link 11/11B			
WORD	DATA ELEMENT	VALUE	TRANSLATION		FIELD	VALUE	NOTES
			REQUIRED	MESSAGE			
J13.5I	WORD FORMAT	0	None	NA	NA	NA	
	LABEL, J-SERIES	13	CR	M.14	LABEL	14	
	SUBLABEL, J-SERIES	5	CR	M.14	LABEL	14	
	MESSAGE LENGTH INDICATOR	AR	None	NA	NA	NA	G3
	OPERATIONAL CAPABILITY	AT	CR	M.14	WEAPON/ENGAGEMENT STATUS	RX	1
	TRACK NUMBER, REFERENCE	AT	CR	M.14	TN FRIENDLY WEAPON SYSTEM	RX	G13
	SITE TYPE	0	None	NA	NA	NA	2
	HOT INVENTORY	AT	CR	M.14	HOT INVENTORY	RX	3
	SAM MODE STATE	0	None	NA	NA	NA	
	TIME FUNCTION	0	None	NA	NA	NA	
	MINUTE	63	None	NA	NA	NA	
	HOURL	31	None	NA	NA	NA	
	PERIMETER ENGAGEMENT STATUS	AT	CR	M.14	WEAPON/ENGAGEMENT STATUS	RX	4
J13.5C1	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	1	None	NA	NA	NA	
	COLD INVENTORY	AT	CR	M.14	COLD INVENTORY	RX	5
	OPERATIONAL IMPAIRMENT	0	None	NA	NA	NA	
	NATO LINK 1 STATUS	0	None	NA	NA	NA	
	LINK 14 STATUS	0	None	NA	NA	NA	
	LINK 11 STATUS	0	None	NA	NA	NA	

C-549

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J13.5. J13.5 Message Data Element Translation from the M.14 Message (Sheet 2 of 4)

WORD J13.5C1 (Cont'd)	Link 16		Link 11/11B	
	DATA ELEMENT LINK 11B STATUS	TRANSLATION		FIELD NA
		VALUE 0	REQUIRED None	
			MESSAGE NA	
	LINK 16 STATUS	0	None	NA
	ATDL 1 STATUS	0	None	NA
	IJMS STATUS	0	None	NA
	COMMUNICATIONS IMPAIRMENT	0	None	NA
	CONTROL POSITIONS	31	None	NA
	TIME FUNCTION	0	None	NA
	MINUTE	63	None	NA
	HOURL	31	None	NA
	PRIMARY SURVEILLANCE RADAR STATUS	0	None	NA
	SECONDARY SURVEILLANCE RADAR STATUS	0	None	NA
	TERTIARY SURVEILLANCE RADAR STATUS	0	None	NA
	ACQUISITION RADAR STATUS	0	None	NA
	ILLUMINATING RADAR STATUS	0	None	NA
	MODE IV INTERROGATOR STATUS	0	None	NA
	IFF/SIF INTERROGATOR STATUS	0	None	NA
J13.5C2	NOT TRANSLATED			

C-550

APPENDIX C

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-J13.5. J13.5 Message Data Element Translation from the M.14 Message (Sheet 3 of 4)

NOTES

1. The M.14 Weapon/Engagement Statuses (W/ES) will be reported in the J13.5 Operational Capability field as follows:

Link 16	Link 11/11B
OPERATIONAL CAPABILITY	WEAPON/ENGAGEMENT STATUS
0	12
1	0
3	1

2. Site Type is more specific than Weapon Type; therefore, the generic weapon types of SAM and Conventional (Short-range Missile/Guns) do not translate to Site Type.

3. The M.14 Hot Inventory will be translated to the J13.5 Hot Inventory as follows:

Link 16	Link 11/11B
HOT INVENTORY	HOT INVENTORY
1-125	1-125
126	126, 127
127	0

4. The M.14 W/ES field will be reported in the J13.5 Perimeter Engagement Status field as follows:

Link 16	Link 11/11B
PERIMETER ENGAGEMENT STATUS	WEAPON/ENGAGEMENT STATUS
0	0, 1
1	12

5. The M.14 Cold Inventory will be translated to the J13.5 Cold Inventory as follows:

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-J13.5. J13.5 Message Data Element Translation from the M.14
Message (Sheet 4 of 4)

NOTES (Continued)

5. (Continued)

Link 16
COLD INVENTORY
1-31
127

Link 11/11B
COLD INVENTORY
1-31
0

TABLE C.5.2-J14.0-1. J14.0 Message Data Element Translation from the M.5/M.85 Message (Sheet 1 of 4)

Link 16					Link 11/11B		
WORD J14.0I	DATA ELEMENT WORD FORMAT	TRANSLATION			FIELD NA	VALUE NA	NOTES
		VALUE 0	REQUIRED None	MESSAGE NA			
	LABEL, J-SERIES	14	CR	M.5	LABEL	5	1
	SUBLABEL, J-SERIES	0	CR	M.5	LABEL	5	
	MESSAGE LENGTH INDICATOR	AR	None	NA	NA	NA	G3
	THREAT EVALUATION	0	None	NA	NA	NA	
	RESPONSE INDICATOR, EWAC	0	None	NA	NA	NA	
	SPECIAL PROCESSING INDICATOR	RX	=	M.1 or M.9A(AC=0)	SPECIAL PROCESSING INDICATOR	RX	G5
	AGILE EMITTER	0	None	NA	NA	NA	
	TRACK NUMBER, REFERENCE/ INDEX NUMBER INDICATOR	0	None	NA	NA	NA	
	TRACK NUMBER, REFERENCE	AT	CR	M.5	TRACK NUMBER/ADDRESS	RX	G13
	INDEX NUMBER	0	None	NA	NA	NA	
	BEARING ORIGIN	0	None	NA	NA	NA	
	SQUARE/CIRCLE SWITCH	0	None	NA	NA	NA	
	FIX OR BEARING DESCRIPTOR	0	None	NA	NA	NA	
	SECOND	0	None	NA	NA	NA	
	MINUTE	AT	CR	M.85	SWITCH TIME SWITCH MINUTES	1 RX RX	2
	HOUR	AT	CR	M.85	SWITCH TIME SWITCH HOURS	1 RX RX	3
	REQUEST NUMBER	0	None	NA	NA	NA	
	ENVIRONMENT/CATEGORY	0	None	NA	NA	NA	

TABLE C.5.2-J14.0-1. J14.0 Message Data Element Translation from the M.5/M.85 Message (Sheet 2 of 4)

C-554

Link 16					Link 11/11B		
WORD	DATA ELEMENT	VALUE	TRANSLATION		FIELD	VALUE	NOTES
J14.0I (Cont'd)	LOCK-ON	0	None	MESSAGE	NA	NA	
J14.0E0	NOT TRANSLATED						
J14.0C1	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	1	None	NA	NA	NA	
	PARAMETER SOURCE	0	None	NA	NA	NA	
	BEARING ACCURACY	0	None	NA	NA	NA	
	BEARING	0	None	NA	NA	NA	
	SECTOR WIDTH	255	None	NA	NA	NA	
	ELEVATION ANGLE/ALTITUDE INDICATOR	AT	CR	M.85	HEIGHT/DEPTH SWITCH	RX	4
	ELEVATION ANGLE	512	None	NA	NA	NA	
	ALTITUDE, 25 FT	AT	CR	M.85	SWITCH HEIGHT/DEPTH SWITCH HEIGHT/DEPTH	1 0 RX	G10
	COURSE	AT	CR	M.85	SWITCH X DOT Y DOT	0 RX RX	G8
J14.0C2	SPEED	AT	CR	M.85	SWITCH X DOT Y DOT	0 RX RX	G8
	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	2	None	NA	NA	NA	
	LATITUDE, 0.0051 MINUTE	AT	CR	M.5	SCALE INDICATOR X COORDINATE Y COORDINATE	RX RX RX	G9

MIL-STD-6016B
APPENDIX C

TABLE C.5.2-J14.0-1. J14.0 Message Data Element Translation from the M.5/M.85 Message (Sheet 3 of 4)

Link 16					Link 11/11B		
WORD	DATA ELEMENT	VALUE	TRANSLATION		FIELD	VALUE	NOTES
J14.0C2 (Cont'd)	LONGITUDE, 0.0051 MINUTE	AT	REQUIRED	MESSAGE	SCALE INDICATOR	RX	G9
			CR	M.5	X COORDINATE	RX	
					Y COORDINATE	RX	
	AREA MAJOR AXIS	63	None	NA	NA	NA	
	AREA MINOR AXIS	63	None	NA	NA	NA	
	AXIS ORIENTATION	255	None	NA	NA	NA	
J14.0C3	NOT TRANSLATED						
J14.0C4	NOT TRANSLATED						
J14.0C5	NOT TRANSLATED						
J14.0C6	NOT TRANSLATED						

APPENDIX C

TABLE C.5.2-J14.0-1. J14.0 Message Data Element Translation from the M.5/M.85 Message (Sheet 4 of 4)

NOTES

1. The J14.0 message is only translated from an M.5 message when Point = 0, and the EA Fix is not simulated.

2. When the M.85 Switch = 0, the J14.0 Minute field is forwarded as No Statement. When Switch = 1, the J14.0 Minute field is determined from the M.85 Time Switch and Minutes fields as follows:

Link 16	Link 11/11B	
MINUTE	TIME SWITCH	MINUTES
0-59 - 0 THROUGH 59	1	0-59 - 0 THROUGH 59 MINUTES
63 - NO STATEMENT	0	ANY

3. When the M.85 Switch = 0, the J14.0 Hour field is forwarded as No Statement. When Switch = 1, the J14.0 Hour field is determined from the M.85 Time Switch and Hours field as follows:

Link 16	Link 11/11B	
HOUR	TIME SWITCH	HOURS
0-23 (0-23 HOURS)	1	0-23 - 0 THROUGH 23 HOURS
31 - NO STATEMENT	0	ANY

4. The Elevation Angle/Altitude Indicator is determined from the Height/Depth Switch as follows:

Link 16	Link 11/11B
ELEVATION ANGLE/ALTITUDE INDICATOR	HEIGHT/DEPTH SWITCH
0 - NO STATEMENT	1 - DEPTH IN 50 FOOT INCREMENTS
2 - ALTITUDE IS BEING REPORTED	0 - HEIGHT IN 500 FOOT INCREMENTS

TABLE C.5.2-J14.0-2. J14.0 Message Data Element Translation from the M.6A Message (Sheet 1 of 7)

Link 16					Link 11/11B		
WORD J14.0I	DATA ELEMENT WORD FORMAT	TRANSLATION			FIELD NA	VALUE NA	NOTES
		VALUE 0	REQUIRED None	MESSAGE NA			
	LABEL, J-SERIES	14	CR	M.6A	LABEL	6	
	SUBLABEL, J-SERIES	0	CR	M.6A	SUB LABEL	0	
	MESSAGE LENGTH INDICATOR	AR	None	NA	NA	NA	G3
	THREAT EVALUATION	AT	CR	M.6A	ACTION VALUE THREAT EVALUATION	1 RX	1
	RESPONSE INDICATOR, EWAC	0	None	NA	NA	NA	
	SPECIAL PROCESSING INDICATOR	RX	=	M.1 or M.9A(AC=0)	SPECIAL PROCESSING INDICATOR	RX	G5
	AGILE EMITTER	0	None	NA	NA	NA	
	TRACK NUMBER, REFERENCE/ INDEX NUMBER INDICATOR	0	None	NA	NA	NA	
	TRACK NUMBER, REFERENCE	AT	CR	M.6A	TRACK NUMBER	RX	G13
	INDEX NUMBER	0	None	NA	NA	NA	
	BEARING ORIGIN	0	None	NA	NA	NA	2
	SQUARE/CIRCLE SWITCH	0	None	NA	NA	NA	
	FIX OR BEARING DESCRIPTOR	4	None	NA	NA	NA	3
	SECOND	AT	CR	M.6A	ACTION VALUE TIME STALE	1 RX	4
	MINUTE	AT	CR	M.6A	ACTION VALUE TIME STALE	1 RX	4
	HOURL	AT	CR	M.6A	ACTION VALUE TIME STALE	1 RX	4
	REQUEST NUMBER	0	None	NA	NA	NA	

TABLE C.5.2-J14.0-2. J14.0 Message Data Element Translation from the M.6A Message (Sheet 2 of 7)

WORD	Link 16		TRANSLATION		Link 11/11B		
	DATA ELEMENT	VALUE	REQUIRED	MESSAGE	FIELD	VALUE	NOTES
	ENVIRONMENT/CATEGORY	AT	CR	M.6A	ACTION VALUE PLATFORM	1 RX	
J14.0E0	LOCK-ON	0	None	NA	NA	NA	
	WORD FORMAT	2	None	NA	NA	NA	
	TRACK NUMBER, ORIGIN	AT	CR	M.6A	ACTION VALUE TN OF ORIGIN	0 RX	G13
	FREQUENCY/FREQUENCY RANGE INDICATOR	1	None	NA	NA	NA	
	FREQUENCY MULTIPLIER, 1	AT	CR	M.6A	ACTION VALUE SWITCH FREQUENCY	1 0 RX	G19
	FREQUENCY, 1	AT	CR	M.6A	ACTION VALUE SWITCH FREQUENCY	1 0 RX	G19
	FREQUENCY MULTIPLIER, 2	AT	CR	M.6A	ACTION VALUE SWITCH FREQUENCY	1 0 RX	G19
	FREQUENCY, 2	AT	CR	M.6A	ACTION VALUE SWITCH FREQUENCY	1 0 RX	G19
	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	1	None	NA	NA	NA	
J14.0C1	PARAMETER SOURCE	0	None	NA	NA	NA	
	BEARING ACCURACY	AT	CR	M.6A	ACTION VALUE BEARING ACCURACY	0 RX	6
	BEARING	RX	=	M.6A	ACTION VALUE BEARING	0 RX	
	SECTOR WIDTH	255	None	NA	NA	NA	

C-558

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J14.0-2. J14.0 Message Data Element Translation from the M.6A Message (Sheet 3 of 7)

WORD	Link 16		TRANSLATION		Link 11/11B		
	DATA ELEMENT	VALUE	REQUIRED	MESSAGE	FIELD	VALUE	NOTES
J14.0C1 (Cont'd)	ELEVATION ANGLE/ALTITUDE INDICATOR	1	None	NA	NA	NA	
	ELEVATION ANGLE	AT	CR	M.6A	ACTION VALUE SWITCH ELEVATION	1 1 RX	7
	ALTITUDE, 25 FT	8191	None	NA	NA	NA	
	COURSE	511	None	NA	NA	NA	
	SPEED	2047	None	NA	NA	NA	
J14.0C2	NOT TRANSLATED						
J14.0C3	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	3	None	NA	NA	NA	
	EMITTER FUNCTION	0	None	NA	NA	NA	
	MODE NUMBER	0	None	NA	NA	NA	
	MODULATION CODE	0	None	NA	NA	NA	
	MULTIPLE EVALUATION	0	None	NA	NA	NA	
	BROAD CLASSIFICATION	RX	=	M.6A	ACTION VALUE BROAD CLASSIFICATION	0 RX	
	AMPLIFYING CHARACTERISTICS	RX	=	M.6A	ACTION VALUE AMPLIFYING CHARACTERISTICS	1 RX	
	EMITTER CONFIDENCE	0	None	NA	NA	NA	
	EMITTER NUMBER	0	None	NA	NA	NA	
	EMITTER NUMBER INDICATOR	0	None	NA	NA	NA	
	WARTIME RESERVE MODE INDICATOR	0	None	NA	NA	NA	

C-559

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J14.0-2. J14.0 Message Data Element Translation from the M.6A Message (Sheet 4 of 7)

Link 16					Link 11/11B		
WORD	DATA ELEMENT	VALUE	TRANSLATION REQUIRED	MESSAGE	FIELD	VALUE	NOTES
J14.0C4	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	4	None	NA	NA	NA	
	PRF/PRI INDICATOR	0	None	NA	NA	NA	
	PULSE REPETITION FREQUENCY	0	None	NA	NA	NA	
	PULSE REPETITION INTERVAL	0	None	NA	NA	NA	
	PULSE WIDTH	0	None	NA	NA	NA	
	JITTER	0	None	NA	NA	NA	
	SCAN TYPE	0	None	NA	NA	NA	
	ANTENNA SCAN RATE/PERIOD INDICATOR	0	None	NA	NA	NA	
	ANTENNA SCAN RATE	0	None	NA	NA	NA	
	ANTENNA SCAN PERIOD	0	None	NA	NA	NA	
	POLARIZATION	0	None	NA	NA	NA	
	JAMMER RECEIVED SIGNAL LEVEL	RX	=	M. 6A	ACTION VALUE SWITCH JAMMER RECEIVED SIGNAL LEVEL	1 1 RX	
J14.0C5	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	5	None	NA	NA	NA	
	NATIONALITY/ALLIANCE OF TRACK	0	None	NA	NA	NA	
	PLATFORM EVALUATION CONFIDENCE	0	None	NA	NA	NA	
	PLATFORM	AT	CR	M. 6A	ACTION VALUE PLATFORM	1 RX	5

C-560

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J14.0-2. J14.0 Message Data Element Translation from the M.6A Message (Sheet 5 of 7)

<u>WORD</u>	<u>Link 16</u>		<u>Link 11/11B</u>		<u>NOTES</u>
	<u>DATA ELEMENT</u>	<u>VALUE</u>	<u>TRANSLATION</u>	<u>FIELD</u>	
J14.0C5 (Cont'd)	PLATFORM ACTIVITY	0	None	NA	
	SPACE SPECIFIC TYPE	0	None	NA	
	AIR SPECIFIC TYPE	0	None	NA	
	SURFACE (MARITIME) SPECIFIC TYPE	0	None	NA	
	SUBSURFACE (MARITIME) SPECIFIC TYPE	0	None	NA	
	LAND (GROUND) SPECIFIC TYPE	0	None	NA	
	LOCAL DISCRETE IDENTIFIER	0	None	NA	
J14.0C6	NOT TRANSLATED				

APPENDIX C

NOTES

- | Link 16 | Link 11/11B |
|--------------------------|----------------------|
| THREAT EVALUATION | THREAT EVALUATION |
| 0 - PENDING/NO STATEMENT | 0 - PENDING |
| 1 - UNKNOWN | 1 - UNKNOWN |
| 2 - NON-THREAT | 2 - NONTHREAT/FRIEND |
| 3 - THREAT | 3 - THREAT |

- | | | |
|------------------------------|------------------------------|--|
| <u>Link 16</u> | | <u>Link 11/11B</u> |
| <u>ENVIRONMENT/CATEGORY</u> | <u>AIR PLATFORM</u> | <u>PLATFORM</u> |
| 0 - NO STATEMENT/
UNKNOWN | 0 - NO STATEMENT | 0 - NO STATEMENT |
| 2 - AIR | 0 - NO STATEMENT | 2 - AIRBORNE (AIRCRAFT
EXCLUDING MISSILE) |
| | 13 - MISSILE | 1 - MISSILE |
| | 36 - MISSILE CONTROL
UNIT | 6 - MISSILE CONTROL
UNIT (AIRBORNE) |

APPENDIX C

TABLE C.5.2-J14.0-2. J14.0 Message Data Element Translation from the M.6A Message (Sheet 7 of 7)

NOTES (Continued)

5. (Continued)

<u>Link 16</u>		<u>Link 11/11B</u>
<u>ENVIRONMENT/CATEGORY</u>	<u>SURFACE (MARITIME)</u> <u>PLATFORM</u>	<u>PLATFORM</u>
3 - SURFACE (MARITIME)	0 - NO STATEMENT 33 - MISSILE CONTROL UNIT	3 - SURFACE 7 - MISSILE CONTROL UNIT (SURFACE/ SUBSURFACE)
<u>ENVIRONMENT/CATEGORY</u>	<u>SUBSURFACE (MARITIME)</u> <u>PLATFORM</u>	<u>PLATFORM</u>
4 - SUBSURFACE (MARITIME)	0 - NO STATEMENT	4 - SUBSURFACE (SUBMARINE)
<u>ENVIRONMENT/CATEGORY</u>	<u>LAND (GROUND) PLATFORM</u>	<u>PLATFORM</u>
5 - LAND (GROUND)	0 - NO STATEMENT	5 - LAND

6. Bearing Accuracy is determined as follows:

<u>Link 16</u>	<u>Link 11/11B</u>
<u>BEARING ACCURACY (NO STATEMENT)</u>	<u>BEARING ACCURACY</u>
0(NO STATEMENT)	3(> = 5 DEGREES/NO STATEMENT)
3(<= 5.0 DEGREES)	2(< 5 DEGREES)
6(<= 2.0 DEGREES)	1(< 2 DEGREES)
7(<= 1.0 DEGREES)	0(< 1 DEGREE)

7. When Action Value = 1 and Switch = 1, the M.6A Elevation equates to the J14.0 Elevation Angle, except that M.6A Elevation = 512 shall be converted to J14.0 Elevation Angle = 511, because J14.0 Elevation Angle = 512 means No Statement, but M.6A Elevation = 512 means $\pi/2$.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-J14.0-3. J14.0 Message Data Element Translation from the M.6B/M.86B/M.6C/M.86C Message
(Sheet 1 of 8)

WORD J14.0I	Link 16		TRANSLATION		Link 11/11B		NOTES
	DATA ELEMENT WORD FORMAT	VALUE 0	REQUIRED None	MESSAGE NA	FIELD NA	VALUE NA	
	LABEL, J-SERIES	14	CR	M.6B	LABEL	6	
	SUBLABEL, J-SERIES	0	CR	M.6B	SUB LABEL	1	
	MESSAGE LENGTH INDICATOR	AR	None	NA	NA	NA	G3
	THREAT EVALUATION	AT	CR	M.6B	THREAT EVALUATION	RX	1
	RESPONSE INDICATOR, EWAC	0	None	NA	NA	NA	
	SPECIAL PROCESSING INDICATOR	RX	=	M.1 or M.9A(AC=0)	SPECIAL PROCESSING INDICATOR	RX	G5
	AGILE EMITTER	0	None	NA	NA	NA	
	TRACK NUMBER, REFERENCE/ INDEX NUMBER INDICATOR	0	None	NA	NA	NA	
	TRACK NUMBER, REFERENCE	AT	CR	M.6B	TRACK NUMBER	RX	G13
	INDEX NUMBER	0	None	NA	NA	NA	
	BEARING ORIGIN	1	None	NA	NA	NA	
	SQUARE/CIRCLE SWITCH	0	None	NA	NA	NA	
	FIX OR BEARING DESCRIPTOR	AT	CR	M.6B M.86B	FIX OR BEARING BEARING INDICATOR REPORT SOURCE	RX RX RX	2
	SECOND	0	None	NA	NA	NA	
	MINUTE	AT	CR	M.86B	TIME STALE	RX	3
	HOURL	AT	CR	M.86B	TIME STALE	RX	3
	REQUEST NUMBER	0	None	NA	NA	NA	
	ENVIRONMENT/CATEGORY	AT	CR	M.6B	PLATFORM	RX	4

C-565

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J14.0-3. J14.0 Message Data Element Translation from the M.6B/M.86B/M.6C/M.86C Message
(Sheet 2 of 8)

Link 16					Link 11/11B			
WORD	DATA ELEMENT	VALUE	TRANSLATION		FIELD	VALUE	NOTES	
			REQUIRED	MESSAGE				
J14.0I (Cont'd)	LOCK-ON	RX	=	M.86B	LOCK-ON/SPY	RX		
J14.0E0	WORD FORMAT	2	None	NA	NA	NA		
	TRACK NUMBER, ORIGIN	0	None	NA	NA	NA		
	FREQUENCY/FREQUENCY RANGE INDICATOR	AT	CR	M.86B	EVALUATION SWITCH FREQUENCY MULTIPLIER	0 RX	G19	
	FREQUENCY MULTIPLIER, 1	AT	CR	M.86B	EVALUATION SWITCH FREQUENCY MULTIPLIER	0 RX	G19	
	FREQUENCY, 1	AT	CR	M.86B	EVALUATION SWITCH FREQUENCY/FREQUENCY RANGE	0 RX	G19	
	FREQUENCY MULTIPLIER, 2	AT	CR	M.86B	EVALUATION SWITCH FREQUENCY MULTIPLIER	0 RX	G19	
	FREQUENCY, 2	AT	CR	M.86B	EVALUATION SWITCH FREQUENCY/FREQUENCY RANGE	0 RX	G19	
J14.0C1	WORD FORMAT	1	None	NA	NA	NA		
	CONTINUATION WORD LABEL	1	None	NA	NA	NA		
	PARAMETER SOURCE	AT	CR	M.86B	REPORT SOURCE	RX	5	
	BEARING ACCURACY	AT	CR	M.86B	BEARING ACCURACY	RX	6	
	BEARING	AT	CR	M.86B	BEARING INDICATOR BEARING	0 RX	7	
	SECTOR WIDTH	255	None	NA	NA	NA		
	ELEVATION ANGLE/ALTITUDE INDICATOR	0	None	NA	NA	NA		
	ELEVATION ANGLE	512	None	NA	NA	NA		

C-566

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J14.0-3. J14.0 Message Data Element Translation from the M.6B/M.86B/M.6C/M.86C Message
(Sheet 3 of 8)

Link 16					Link 11/11B		
WORD	DATA ELEMENT	VALUE	TRANSLATION REQUIRED	MESSAGE	FIELD	VALUE	NOTES
J14.0C1 (Cont'd)	ALTITUDE, 25 FT	8191	None	NA	NA	NA	
	COURSE	511	None	NA	NA	NA	
	SPEED	2047	None	NA	NA	NA	
J14.0C2	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	2	None	NA	NA	NA	
	LATITUDE, 0.0051 MINUTE	AT	CR	M.6B	X COORDINATE Y COORDINATE	RX RX	G9
	LONGITUDE, 0.0051 MINUTE	AT	CR	M.6B	X COORDINATE Y COORDINATE	RX RX	G9
	AREA MAJOR AXIS	63	None	NA	NA	NA	
	AREA MINOR AXIS	63	None	NA	NA	NA	
	AXIS ORIENTATION	255	None	NA	NA	NA	
J14.0C3	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	3	None	NA	NA	NA	
	EMITTER FUNCTION	0	None	NA	NA	NA	
	MODE NUMBER	RX	=	M.86B	EVALUATION SWITCH MODE NUMBER	1 RX	
	MODULATION CODE	0	None	NA	NA	NA	
	MULTIPLE EVALUATION	0	None	NA	NA	NA	
	BROAD CLASSIFICATION	RX	=	M.86B	EVALUATION SWITCH BROAD CLASSIFICATION	0 RX	

C-567

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J14.0-3. J14.0 Message Data Element Translation from the M.6B/M.86B/M.6C/M.86C Message
(Sheet 4 of 8)

WORD	Link 16		TRANSLATION		Link 11/11B		NOTES
	DATA ELEMENT	VALUE	REQUIRED	MESSAGE	FIELD	VALUE	
J14.0C3 (Cont'd)	AMPLIFYING CHARACTERISTICS	RX	=	M.86B	EVALUATION SWITCH AMPLIFYING CHARACTERISTICS	0 RX	
	EMITTER CONFIDENCE	RX	=	M.86B	EVALUATION SWITCH CONFIDENCE	1 RX	
	EMITTER NUMBER	RX	=	M.86B	EVALUATION SWITCH EMITTER NUMBER	1 RX	G15
	EMITTER NUMBER INDICATOR	1	CR	M.86B	EVALUATION SWITCH	1	
	WARTIME RESERVE MODE INDICATOR	0	None	NA	NA	NA	
J14.0C4	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	4	None	NA	NA	NA	
	PRF/PRI INDICATOR	0	None	NA	NA	NA	
	PULSE REPETITION FREQUENCY	AT	CR	M.6C	PULSE REPETITION FREQUENCY PRF SCALING	RX RX	8
	PULSE REPETITION INTERVAL	0	None	NA	NA	NA	
	PULSE WIDTH	AT	CR	M.86C	PULSE WIDTH	RX	9
	JITTER	RX	=	M.6C	JITTER	RX	
	SCAN TYPE	RX	=	M.6C	SCAN TYPE	RX	
	ANTENNA SCAN RATE/PERIOD INDICATOR	AT	CR	M.86C	SWITCH	RX	10
	ANTENNA SCAN RATE	RX	=	M.86C	SWITCH SCAN RATE	1 RX	
	ANTENNA SCAN PERIOD	RX	=	M.86C	SWITCH ANTENNA SCAN PERIOD	0 RX	

C-568

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J14.0-3. J14.0 Message Data Element Translation from the M.6B/M.86B/M.6C/M.86C Message
(Sheet 5 of 8)

Link 16					Link 11/11B		
WORD	DATA ELEMENT	VALUE	TRANSLATION	MESSAGE	FIELD	VALUE	NOTES
J14.0C4 (Cont'd)	POLARIZATION	RX	= REQUIRED	M.86C	POLARIZATION	RX	
J14.0C5	JAMMER RECEIVED SIGNAL LEVEL	0	None	NA	NA	NA	
	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	5	None	NA	NA	NA	
	NATIONALITY/ALLIANCE OF TRACK	0	None	NA	NA	NA	
	PLATFORM EVALUATION CONFIDENCE	AT	CR	M.86B	REPORT SOURCE PLATFORM EVALUATION CONFIDENCE	RX RX	11
	PLATFORM	AT	CR	M.6B	PLATFORM	RX	4
	PLATFORM ACTIVITY	0	None	NA	NA	NA	
	SPACE SPECIFIC TYPE	0	None	NA	NA	NA	
	AIR SPECIFIC TYPE	0	None	NA	NA	NA	
	SURFACE (MARITIME) SPECIFIC TYPE	0	None	NA	NA	NA	
	SUBSURFACE (MARITIME) SPECIFIC TYPE	0	None	NA	NA	NA	
	LAND (GROUND) SPECIFIC TYPE	0	None	NA	NA	NA	
J14.0C6	LOCAL DISCRETE IDENTIFIER	0	None	NA	NA	NA	
	NOT TRANSLATED						

C-569

MIL-STD-6016B
APPENDIX C

APPENDIX C

TABLE C.5.2-J14.0-3. J14.0 Message Data Element Translation from the M.6B/M.86B/M.6C/M.86C Message (Sheet 6 of 8)

NOTES

1. Threat Evaluation is determined as follows:

Link 16	Link 11/11B
THREAT EVALUATION	THREAT EVALUATION
0 - PENDING/NO STATEMENT	0 - PENDING
1 - UNKNOWN	1 - UNKNOWN
2 - NON-THREAT	2 - NONTHREAT/FRIEND
3 - THREAT	3 - THREAT

2. The J14.0 Fix or Bearing Descriptor is determined from the M.6B/M.86B Fix or Bearing (F/B), Report Source (RS), and Bearing Indicator (BI) fields, as follows:

Link 16	Link 11/11B		
FIX OR BEARING DESCRIPTOR	FIX OR BEARING	REPORT SOURCE	BEARING INDICATOR
0 - EW FIX	1 - FIX	0 - ES (OTHER THAN RDF)	0 OR 1
3 - BEARING, ES	0 - BEARING	0 - ES (OTHER THAN RDF)	0 - BEARING
5 - BEARING, RADIO DIRECTION FINDING	0 - BEARING	1 - RDF	NA
7 - BEARING, UNKNOWN	0 - BEARING	0 - ES (OTHER THAN RDF)	1 - BEARING UNKNOWN

(Note: An M.6B/M.86B with F/B = 1 and RS = 1 is illegal. Also, when M.86B RS = 1, the M.86B has no Bearing Indicator field.)

3. Hour and Minute are determined from the M.86B Time Stale field by subtracting the value in the Time Stale field from the estimated time of transmission of the J14.0, rounding to the nearest whole minute. This procedure will be used when Time Stale = 30, even though 30 is defined as 30 minutes or more. Time Stale = 31 (Nonreal-time Fix or Bearing) shall be translated to Hour = 31 (No Statement) and Minute = 63 (No Statement).

APPENDIX C

TABLE C.5.2-J14.0-3. J14.0 Message Data Element Translation from the M.6B/M.86B/M.6C/M.86C Message (Sheet 7 of 8)

NOTES (Continued)

4. The J14.0 Environment/Category (E/C) and Platform fields are determined from the M.6B Platform field as follows:

Link 16		Link 11/11B
ENVIRONMENT/CATEGORY	AIR PLATFORM	PLATFORM
0 - NO STATEMENT/ UNKNOWN	0 - NO STATEMENT	0 - NO STATEMENT
2 - AIR	0 - NO STATEMENT	2 - AIRBORNE (AIRCRAFT EXCLUDING MISSILE)
	13 - MISSILE	1 - MISSILE
	36 - MISSILE CONTROL UNIT	6 - MISSILE CONTROL UNIT (AIRBORNE)
	SURFACE (MARITIME)	
ENVIRONMENT/CATEGORY	PLATFORM	PLATFORM
3 - SURFACE (MARITIME)	0 - NO STATEMENT	3 - SURFACE
	33 - MISSILE CONTROL UNIT	7 - MISSILE CONTROL UNIT (SURFACE/ SUBSURFACE)
	SUBSURFACE (MARITIME)	
ENVIRONMENT/CATEGORY	PLATFORM	PLATFORM
4 - SUBSURFACE (MARITIME)	0 - NO STATEMENT	4 - SUBSURFACE (SUBMARINE)
	LAND (GROUND) PLATFORM	
ENVIRONMENT/CATEGORY	PLATFORM	PLATFORM
5 - LAND (GROUND)	0 - NO STATEMENT	5 - LAND

5. The J14.0 Parameter Source field is determined from the M.86B Report Source field as follows:

Link 16	Link 11/11B
PARAMETER SOURCE	REPORT SOURCE
5 - REPORT SOURCE, RADIO DIRECTION FINDING	1 - RDF
6 - REPORT SOURCE, OTHER	0 - ES (OTHER THAN RDF)

6. Bearing Accuracy is determined as follows:

APPENDIX C

TABLE C.5.2-J14.0-3. J14.0 Message Data Element Translation from the M.6B/M.86B/M.6C/M.86C Message (Sheet 8 of 8)

NOTES (Continued)

6. (Continued)

<u>Link 16</u>	<u>Link 11/11B</u>
<u>BEARING ACCURACY (NO STATEMENT)</u>	<u>BEARING ACCURACY</u>
0(NO STATEMENT)	0(NO STATEMENT)
1(> 10.0 DEGREES)	3(= OR > 10 DEGREES)
2(<= 10.0 DEGREES)	2(< 10 DEGREES)
6(<= 2.0 DEGREES)	1(< 2 DEGREES)

7. Link 11/11B Bearing is in 360/512 degree increments, and Link 16 Bearing is in 360/4096 degree increments. Translate Link 11/11B to the nearest Link 16 increment (.5 rounded up)

8. When the M.6C PRF Scaling (PS) = 1, the J14.0C4 Pulse Repetition Frequency (PRF) = M.6C PRF. When M.6C PS = 0, J14.0C4 PRF shall forward the decimal equivalents of M.6C PRF, except that M.6C PS = 0, PRF = 131,071 shall be translated to J14.0C4 PRF = 8388607 (131,071 PPS or greater). When M.6C PS = 2, the M.6C PRF shall be rounded to the nearest 0.1 PPS (0.05 being rounded up), then J14.0C4 PRF shall be forwarded as M.6C PRF.

9. Link 11/11B Pulse Width is in .1 microsecond increments, and Link 16 Pulse Width is in .05 microsecond increments. Translate Link 11/11B to the equivalent Link 16 increment.

10. The Antenna Scan Rate/Period Indicator is determined from the M.86C Switch field as follows:

<u>Link 16</u>	<u>Link 11/11B</u>
<u>ANTENNA SCAN RATE/PERIOD INDICATOR</u>	<u>SWITCH</u>
1 - PRIMARY ANTENNA SCAN RATE BEING REPORTED	1 - SCAN RATE REPORTED
2 - ANTENNA SCAN PERIOD BEING REPORTED	0 - ANTENNA SCAN PERIOD REPORTED

11. If Report Source = 0, the M.86B has no Platform Evaluation Confidence field and J14.0 Platform Evaluation Confidence shall be transmitted as value 0. If Report Source = 1, J14.0 Platform Evaluation Confidence equates to M.86B Platform Evaluation Confidence.

TABLE C.5.2-J14.0-4. J14.0 Message Data Element Translation from the M.9F(0)/M.89F(0) Message (Sheet 1 of 4)

Link 16					Link 11/11B		
WORD	DATA ELEMENT	VALUE	TRANSLATION REQUIRED	MESSAGE	FIELD	VALUE	NOTES
J14.0I	WORD FORMAT	0	None	NA	NA	NA	
	LABEL, J-SERIES	14	CR	M.9F	LABEL	9	
	SUBLABEL, J-SERIES	0	CR	M.9F	SUBLABEL	5	
	MESSAGE LENGTH INDICATOR	AR	None	NA	NA	NA	G3
	THREAT EVALUATION	0	None	NA	NA	NA	
	RESPONSE INDICATOR, EWAC	0	None	NA	NA	NA	
	SPECIAL PROCESSING INDICATOR	RX	=	M.1 or M.9A(AC=0)	SPECIAL PROCESSING INDICATOR	RX	G5
	AGILE EMITTER	0	None	NA	NA	NA	
	TRACK NUMBER, REFERENCE/ INDEX NUMBER INDICATOR	0	None	NA	NA	NA	
	TRACK NUMBER, REFERENCE	AT	CR	M.9F	TRACK NUMBER	RX	G13
	INDEX NUMBER	0	None	NA	NA	NA	
	BEARING ORIGIN	0	None	NA	NA	NA	
	SQUARE/CIRCLE SWITCH	AT	CR	M.89F(0)	SQUARE/CIRCLE SWITCH	RX	1
	FIX OR BEARING DESCRIPTOR	1	CR	M.89F(0)	SOURCE	1	
	SECOND	0	None	NA	NA	NA	
	MINUTE	RX	=	M.89F(0)	MINUTES	RX	
	HOURL	RX	=	M.89F(0)	HOURS	RX	
	REQUEST NUMBER	0	None	NA	NA	NA	
	ENVIRONMENT/CATEGORY	AT	CR	M.89F(0)	CATEGORY/PLATFORM	RX	2
	LOCK-ON	0	None	NA	NA	NA	

C-573

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J14.0-4. J14.0 Message Data Element Translation from the M.9F(0)/M.89F(0) Message (Sheet 2 of 4)

WORD	Link 16		TRANSLATION		Link 11/11B		
	DATA ELEMENT	VALUE	REQUIRED	MESSAGE	FIELD	VALUE	NOTES
J14.0E0	NOT TRANSLATED						
J14.0C1	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	1	None	NA	NA	NA	
	PARAMETER SOURCE	0	None	NA	NA	NA	
	BEARING ACCURACY	0	None	NA	NA	NA	
	BEARING	0	None	NA	NA	NA	
	SECTOR WIDTH	255	None	NA	NA	NA	
	ELEVATION ANGLE/ALTITUDE INDICATOR	0	None	NA	NA	NA	
	ELEVATION ANGLE	512	None	NA	NA	NA	
	ALTITUDE, 25 FT	8191	None	NA	NA	NA	
	COURSE	AT	CR	M.9F(1)	SWITCH SCALE INDICATOR X DOT Y DOT	0 RX RX RX	G8
J14.0C2	SPEED	AT	CR	M.9F(1)	SWITCH SCALE INDICATOR X DOT Y DOT	0 RX RX RX	G8
	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	2	None	NA	NA	NA	
	LATITUDE, 0.0051 MINUTE	AT	CR	M.9F(0)	X COORDINATE Y COORDINATE	RX RX	G9
	LONGITUDE, 0.0051 MINUTE	AT	CR	M.9F(0)	X COORDINATE Y COORDINATE	RX RX	G9

C-574

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J14.0-4. J14.0 Message Data Element Translation from the M.9F(0)/M.89F(0) Message (Sheet 3 of 4)

Link 16		TRANSLATION			Link 11/11B		
WORD	DATA ELEMENT	VALUE	REQUIRED	MESSAGE	FIELD	VALUE	NOTES
J14.0C2 (Cont'd)	AREA MAJOR AXIS	AT	CR	M.89F(0)	MAJOR AXIS	RX	G18
	AREA MINOR AXIS	AT	CR	M.89F(0)	MINOR AXIS	RX	G18
	AXIS ORIENTATION	AT	CR	M.89F(0)	BEARING	RX	G17
J14.0C3	NOT TRANSLATED						
J14.0C4	NOT TRANSLATED						
J14.0C5	NOT TRANSLATED						
J14.0C6	NOT TRANSLATED						

APPENDIX C

TABLE C.5.2-J14.0-4. J14.0 Message Data Element Translation from the
M.9F(0)/M.89F(0) Message (Sheet 4 of 4)

NOTES

1. The Square/Circle Switch is determined as follows:

Link 16	Link 11/11B
SQUARE/CIRCLE SWITCH	SQUARE/CIRCLE SWITCH
1 - SQUARE/RECTANGULAR	0 - SQUARE/RECTANGLE
2 - CIRCULAR/ELLIPTICAL	1 - CIRCLE/ELLIPSE

2. Environment/Category is determined from the M.89F(AC=0) Category/Platform field as follows:

Link 16	Link 11/11B
ENVIRONMENT/CATEGORY	CATEGORY/PLATFORM
0 - NO STATEMENT/UNKNOWN	0 - NO STATEMENT
2 - AIR	1 - AIR
3 - SURFACE (MARITIME)	2 - SURFACE
4 - SUBSURFACE (MARITIME)	3 - SUBSURFACE

TABLE C.5.2-J14.2. J14.2 Message Data Element Translation from the M.6D/M.86D Message (Sheet 1 of 7)

Link 16					Link 11/11B		
WORD	DATA ELEMENT	VALUE	TRANSLATION		FIELD	VALUE	NOTES
J14.2I	WORD FORMAT	0	None	MESSAGE	NA	NA	
	LABEL, J-SERIES	14	CR	M.6D	LABEL	6	
	SUBLABEL, J-SERIES	2	CR	M.6D	SUB LABEL	3	
	MESSAGE LENGTH INDICATOR	AR	None	NA	NA	NA	G3
	TRACK NUMBER, ADDRESSEE	AT	CR	M.6D	TN ADDRESSEE	RX	1, G12
	ELECTRONIC WARFARE ACTION VALUE	AT	CR	M.6D	CONTROL	RX	2
	TRACK NUMBER, REFERENCE	AT	CR	M.6D	TRACK NUMBER RESPONSE TRACK NUMBER	RX RX	3, G13
	TASK PRIORITY	0	None	NA	NA	NA	
	REQUEST NUMBER	0	None	NA	NA	NA	
	SECTOR/AREA/LOCATION INDICATOR	AT	CR	M.6D	CONTROL	5, 14, 15	4
	RECEIPT/COMPLIANCE	AT	CR	M.6D	CONTROL RECEIPT/COMPLIANCE	RX RX	5
	RECURRENCE RATE, RECEIPT/COMPLIANCE	AR	None	NA	NA	NA	
J14.2E0	WORD FORMAT	2	None	NA	NA	NA	
	IMMEDIATE ACTION INDICATOR	0	None	NA	NA	NA	
	MINUTE	63	None	NA	NA	NA	
	HOURL	31	None	NA	NA	NA	
	SECOND	63	None	NA	NA	NA	
	TIME DURATION	AT	CR	M.6D	CONTROL REPORT DURATION	14 or 15 RX	6

C-577

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J14.2. J14.2 Message Data Element Translation from the M.6D/M.86D Message (Sheet 2 of 7)

WORD	Link 16		TRANSLATION		Link 11/11B		
	DATA ELEMENT	VALUE	REQUIRED	MESSAGE	FIELD	VALUE	NOTES
J14.2E0 (Cont'd)	TRACK NUMBER, ASSOCIATED	AT	CR	M.6D	CONTROL ASSOCIATED TN	9 or 10 RX	7 G13
	REFERENCE ELECTRONIC WARFARE ACTION VALUE	AT	CR	M.6D	CONTROL REFERENCED CONTROL VALUE CANCELED CONTROL VALUE	RX RX RX	8
	DECOY TYPE	0	None	NA	NA	NA	
	DECOY MISSION	0	None	NA	NA	NA	
	INDEX NUMBER	0	None	NA	NA	NA	
	PERIODICITY OF REPORT	RX	=	M.6D	CONTROL PERIOD	0 RX	
	ELECTRONIC WARFARE COORDINATOR INDICATOR	AT	CR	M.6D	CONTROL EWC INDICATOR	RX RX	9
	SQUARE/CIRCLE SWITCH	0	None	NA	NA	NA	
	AUTOMATIC ELECTRONIC ATTACK NEGATION	0	None	NA	NA	NA	
J14.2C1	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	1	None	NA	NA	NA	
	BEARING	AT	CR	M.6D or M.86D	BEARING	RX	10
	TRACK NUMBER, ORIGIN	AT	CR	M.6D	TN ADDRESSEE	RX	10, G15
	BEARING ORIGIN	0	None	NA	NA	NA	10
	SECTOR WIDTH	AT	CR	M.6D or M.86D	BEARING WIDTH SECTOR WIDTH	RX RX	11 11
	ELEVATION ANGLE	512	None	NA	NA	NA	
J14.2C2	NOT TRANSLATED						

C-578

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J14.2. J14.2 Message Data Element Translation from the M.6D/M.86D Message (Sheet 3 of 7)

Link 16					Link 11/11B		
WORD	DATA ELEMENT	VALUE	TRANSLATION REQUIRED	MESSAGE	FIELD	VALUE	NOTES
J14.2C3	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	3	None	NA	NA	NA	
	EMITTER FUNCTION	RX	=	M.6D or M.86D	CONTROL EMITTER FUNCTION	5 RX	
	EMITTER NUMBER	RX	=	M.6D or M.86D	EMITTER NUMBER	RX	12, G15
	EMITTER NUMBER INDICATOR	1	None	NA	NA	NA	
	MODE NUMBER	RX	=	M.6D	MODE NUMBER	RX	
	MODULATION CODE	0	None	NA	NA	NA	
	WARTIME RESERVE MODE INDICATOR	0	None	NA	NA	NA	
	EMITTER CONFIDENCE	RX	=	M.6D	CONFIDENCE	RX	
J14.2C4	WORD FORMAT	1	None	NA	NA	NA	
	CONTINUATION WORD LABEL	4	None	NA	NA	NA	
	FREQUENCY/FREQUENCY RANGE INDICATOR	AT	CR	M.6D	CONTROL FREQUENCY/FREQUENCY RANGE	4 or 5 RX	G19
	FREQUENCY MULTIPLIER, 1	AT	CR	M.6D	FREQUENCY MULTIPLIER	RX	G19
	FREQUENCY, 1	AT	CR	M.6D	FREQUENCY/FREQUENCY RANGE	RX	G19
	FREQUENCY MULTIPLIER, 2	AT	CR	M.6D	FREQUENCY MULTIPLIER	RX	G19
	FREQUENCY, 2	AT	CR	M.6D	FREQUENCY/FREQUENCY RANGE	RX	G19
J14.2C5	NOT TRANSLATED						
J14.2C6	NOT TRANSLATED						

C-579

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-J14.2. J14.2 Message Data Element Translation from the M.6D/M.86D Message (Sheet 4 of 7)

Link 16		Link 11/11B		
<u>WORD</u>	<u>DATA ELEMENT</u>	<u>TRANSLATION</u>		
		<u>VALUE</u>	<u>REQUIRED</u>	<u>MESSAGE</u>
J14.2C7	NOT TRANSLATED			
J14.2C8	NOT TRANSLATED			

APPENDIX C

TABLE C.5.2-J14.2. J14.2 Message Data Element Translation from the
M.6D/M.86D Message (Sheet 5 of 7)

NOTES

1. M.6D messages with Control = 8, 9, 10, or 11 are not addressed and do not contain a TN, Addressee field. When forwarded to Link 16 in a J14.2 message, J14.2I Track Number, Addressee shall be set to 00177 (octal).

2. Electronic Warfare Action Value (EWAC) is determined from M.6D Control as follows:

Link 16	Link 11/11B
ELECTRONIC WARFARE ACTION VALUE	CONTROL
0 - REQUEST PERIODIC REPORT	0 - REQUEST PERIODIC REPORT
1 - REQUEST AUTOMATIC EVALUATION	1 - REQUEST AUTOMATIC EVALUATION
2 - REQUEST MANUAL EVALUATION	2 - REQUEST MANUAL EVALUATION
3 - REQUEST UPDATE AND WATCH	3 - REQUEST UPDATE THEN WATCH
4 - REQUEST DIRECTED SEARCH	4 - REQUEST DIRECTED SEARCH
5 - CANCEL REQUEST	5 - REQUEST DIRECTED SECTOR SEARCH
7 - EMITTER EVALUATION	7 - CANCEL REQUEST/CEASE REPORT
8 - PARAMETER ASSOCIATION	8 - EMITTER EVALUATION
9 - EMITTER ASSOCIATION	9 - PARAMETER ASSOCIATION
10 - DISASSOCIATION	10 - EMITTER ASSOCIATION
11 - NO FIND	11 - DISASSOCIATION
12 - RESPONSE TO AN ELECTRONIC WARFARE REQUEST	12 - NO FIND
13 - EVALUATE TRACK	13 - RESPONSE TO EW REQUEST
14 - EVALUATE SECTOR	14 - EVALUATE TRACK
	15 - EVALUATE SECTOR

3. When M.6D Control = 15, Track Number is Not Used and J14.2I Track Number (TN), Reference shall be set to 00000. When M.6D Control = 13, J14.2I TN, Reference is translated from M.6D Response Track Number. For all other Control values, J14.2I TN, Reference is translated from M.6D Track Number.

4. When M.6D Control = 5, 14, or 15, J14.2I Sector/Area/Location Indicator (S/A/L) shall be set to value 1 (Sector). For all other Control values, S/A/L shall be set at 0 (No Statement).

5. When M.6D Control = 8-13, the M.6D has no Receipt/Compliance (R/C) field and J14.2I R/C shall be set to 1. For all other Control values, R/C is determined as follows:

APPENDIX C

TABLE C.5.2-J14.2. J14.2 Message Data Element Translation from the
M.6D/M.86D Message (Sheet 6 of 7)

NOTES (Continued)

5. (Continued)

Link 16	Link 11
RECEIPT/COMPLIANCE	RECEIPT/COMPLIANCE
0 - ORIGINAL ORDER	0 - ORIGINAL ORDER - RECEIPT/ COMPLIANCE REQUIRED
1 - ORIGINAL ORDER	1 - ORIGINAL ORDER - NO RECEIPT/ COMPLIANCE REQUIRED
6 - CANTCO (CANNOT COMPLY)	3 - CANTCO
7 - CANTPRO (CANNOT PROCESS)	2 - CANTPRO

6. Time Duration is determined from M.6D Report Duration as follows:

Link 16	Link 11
TIME DURATION	REPORT DURATION
0 - NO STATEMENT	0 - ONE REPORT REGARDLESS OF TIME
12 - 1 MINUTE	1 - 1 MINUTE
13 - 5 MINUTES	2 - 5 MINUTES
14 - 20 MINUTES	3 - 20 MINUTES

7. If M.6D Control $\neq$ 9 or 10, J14.2E0 TN, Associated shall be set to 00000. When M.6D Control = 9 or 10, J14.2E0 TN, Associated is translated from M.6D Associated TN.

8. If M.6D Control $\neq$ 7, 12, or 13, J14.2E0 Reference EWAC shall be set to 63. When M.6D Control = 7, 12, or 13, Reference EWAC is determined from M.6D Referenced or Canceled Control Value as follows:

Link 16	Link 11/11B
REFERENCE ELECTRONIC WARFARE ACTION VALUE	CONTROL
0 - REQUEST PERIODIC REPORT	0 - REQUEST PERIODIC REPORT
1 - REQUEST AUTOMATIC EVALUATION	1 - REQUEST AUTOMATIC EVALUATION
2 - REQUEST MANUAL EVALUATION	2 - REQUEST MANUAL EVALUATION
3 - REQUEST UPDATE AND WATCH	3 - REQUEST UPDATE THEN WATCH
4 - REQUEST DIRECTED SEARCH	4 - REQUEST DIRECTED SEARCH
	5 - REQUEST DIRECTED SECTOR SEARCH
13 - EVALUATE TRACK	14 - EVALUATE TRACK
14 - EVALUATE SECTOR	15 - EVALUATE SECTOR

APPENDIX C

TABLE C.5.2-J14.2. J14.2 Message Data Element Translation from the
M.6D/M.86D Message (Sheet 7 of 7)

NOTES (Continued)

9. When M.6D Control $\neq$ 8-13, the M.6D has no EWC Indicator, and the J14.2E0 EWC Indicator shall be set to default value 0. When M.6D Control = 8-13, the M.6D EWC Indicator equates to the J14.2 EWC Indicator.

10. The J14.2C1 word is only translated when M.6D Control = 5, 14, or 15. When Control = 5, M.86D Bearing equates to J14.2C1 Bearing and TN, Origin shall be set to the TN of M.6D TN Addressee. When Control = 14, Bearing and TN, Origin shall be set to value 0. When Control = 15, M.6D Bearing equates to J14.2C1 Bearing and TN, Origin shall be set to value 0. Bearing Origin must be set to default value 0 in all cases, since no bearing origin is specified in the M.6D or M.86D.

11. When M.6D Control = 14 or 15, Link 11 Bearing Width is defined as the total width of the sector centered on the specified bearing, whereas Link 16 Sector Width is defined as the number of degrees on each side of the bearing. Therefore, Link 16 Sector Width is half the Link 11 Bearing Width, and Sector Width is determined from M.6D Bearing Width as follows:

Link 16	Link 11/11B
SECTOR WIDTH	BEARING WIDTH
3 - 3 DEGREES	0 - 5 DEGREES
5 - 5 DEGREES	1 - 10 DEGREES
10 - 10 DEGREES	2 - 20 DEGREES
15 - 15 DEGREES	3 - 30 DEGREES
23 - 23 DEGREES	4 - 45 DEGREES
45 - 45 DEGREES	5 - 90 DEGREES
90 - 90 DEGREES	6 - 180 DEGREES
180 - 180 DEGREES	7 - 360 DEGREES

When M.6D Control = 5, M.86D Sector Width equates to J14.2C1 Sector Width.

12. When M.6D Control = 5, M.86D Emitter Number equates to J14.2C3 Emitter Number in accordance with General Note 15. When M.6D Control = 8, M.6D Emitter Number equates to J14.2C3 Emitter Number in accordance with General Note 15.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-Mx. M-Series Message Data Element Translation from Link 16

Link 11/11B					Link 16		
MESSAGE	FIELD	TRANSLATION			DATA ELEMENT	VALUE	NOTES
		VALUE	REQUIRED	WORD			

There are no Link 16 messages that will stimulate the transmission of an M.0, M.9D, M.9G, M.12, M.12.31 or M.13 Message.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-M.1-1. M.1/M.81 Message Data Element Translation from the J2.0 Message (Sheet 1 of 2)

<u>MESSAGE</u>	Link 11/11B			Link 16		
	<u>FIELD</u>	<u>VALUE</u>	<u>TRANSLATION</u>	<u>DATA ELEMENT</u>	<u>VALUE</u>	<u>NOTES</u>
M.1	<u>LABEL</u>	<u>1</u>	<u>REQUIRED</u>	<u>WORD</u>	<u>2</u>	
			CR	J2.0I	0	
	REFERENCE/POSITION INDICATOR	1	None	NA	NA	1
	SPECIAL PROCESSING INDICATOR	AR	None	NA	NA	2, G5
	SIMULATION INDICATOR, 1	RX	=	J2.0I	SIMULATION INDICATOR	G6
	DELTA LATITUDE	AR	None	NA	NA	3
	PU/RU ORIGINATOR	AT	CR	HEADER	TRACK NUMBER, SOURCE	G2, G12
	DELTA LONGITUDE	AR	None	NA	NA	3
M.81	LABEL	8	CR	J2.0I	LABEL, J-SERIES SUBLABEL, J-SERIES	4
	PU/RU ORIGINATOR	AT	CR	HEADER	TRACK NUMBER, SOURCE	G2, G12
	HEIGHT/DEPTH	AT	CR	J2.0I	ALTITUDE, 25 FT	5, G10
	X DOT	AT	CR	J2.0E0	COURSE SPEED	G7
	Y DOT	AT	CR	J2.0E0	COURSE SPEED	G7
	ORIGINATOR ENVIRONMENT/ CATEGORY	RX	=	J2.0I	ORIGINATOR ENVIRONMENT/ CATEGORY	
	UNIT TYPE	RX	=	J2.0I	UNIT TYPE	
	MISSILE UNIT	0	None	NA	NA	
	SCALE INDICATOR	AT	CR	J2.0I	ALTITUDE, 25 FT	5, G10

APPENDIX C

TABLE C.5.2-M.1-1. M.1/M.81 Message Data Element Translation from the J2.0 Message (Sheet 2 of 2)

NOTES

1. Reference/Position Indicator must be set to 1 indicating the SCC position. This SCC is that of the FJU.
2. On Link 11, the Special Processing Indicator (SPI) of the M.1 message shall be set to the appropriate value for the data following the M.1 message. If the same data source reports both non-SPI and SPI data, the non-SPI M.1 message and data are followed by the SPI M.1 message data.
3. The reported Delta Latitude and Delta Longitude are the offsets showing position of the FJU's SCC referenced to the DLRP. The actual position of the forwarded IU is reported in an M.5 message referenced to the FJU's SCC. All other positional data forwarded by the FJU are also referenced to the FJU's SCC.
4. An M.81 message is forwarded only on Link 11, and then only when Unit Type is reported in the J2.0 message.
5. The Height/Depth field of the M.81 message shall be set to 0 for Originator Environment/Category of 0.

TABLE C.5.2-M.1-2. M.1/M.81 Message Data Element Translation from the J2.2 Message (Sheet 1 of 2)

MESSAGE	Link 11/11B			Link 16		
	FIELD	VALUE	TRANSLATION	DATA ELEMENT	VALUE	NOTES
M.1	LABEL	1	REQUIRED	WORD	2	
			CR	J2.2I	2	
M.81	REFERENCE/POSITION INDICATOR	1	None	NA	NA	1
	SPECIAL PROCESSING INDICATOR	AR	None	NA	NA	2, G5
	SIMULATION INDICATOR, 1	RX	=	J2.2I	SIMULATION INDICATOR	G6
	DELTA LATITUDE	AR	None	NA	NA	3
	PU/RU ORIGINATOR	AT	CR	HEADER	TRACK NUMBER, SOURCE	G2, G12
	DELTA LONGITUDE	AR	None	NA	NA	3
	LABEL	8	CR	J2.2I	LABEL, J-SERIES SUBLABEL, J-SERIES	2 2
	PU/RU ORIGINATOR	AT	CR	HEADER	TRACK NUMBER, SOURCE	G2, G12
	HELICOPTER CARRYING	0	None	NA	NA	
	HEIGHT/DEPTH		CR	J2.2I	ALTITUDE, 25 FT	G10
	X DOT	AT	CR	J2.2E0	COURSE SPEED	G7 RX
	Y DOT	AT	CR	J2.2E0	COURSE SPEED	G7 RX
	ORIGINATOR ENVIRONMENT/ CATEGORY	3	CR	J2.2I	LABEL, J-SERIES SUBLABEL, J-SERIES	2 2
	UNIT TYPE	AT	CR	J2.2C1	AIR PLATFORM	4
	MISSILE UNIT	0	None	NA	NA	
	SCALE INDICATOR	AR	CR	J2.2I	ALTITUDE, 25 FT	G10

C-589

APPENDIX C

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.1-2. M.1/M.81 Message Data Element Translation from the J2.2 Message (Sheet 2 of 2)

NOTES

1. Reference/Position Indicator must be set to 1 indicating the SCC position. This SCC is that of the FJU.
2. On Link 11, the Special Processing Indicator (SPI) of the M.1 message shall be set to the appropriate value for the data following the M.1 message. If the same data source reports both non-SPI and SPI data, the non-SPI M.1 message and data are followed by the SPI M.1 message data.
3. The reported Delta Latitude and Delta Longitude are the offsets showing position of the FJU's SCC referenced to the DLRP. The actual position of the forwarded IU is reported in M.5 message referenced to the FJU's SCC. All other positional data forwarded by the FJU are also referenced to the FJU's SCC.
4. The M.81 Unit Type is derived from the J2.2 Air Platform as follows:

Link 11
UNIT TYPE
0 - NO STATEMENT
1 - MARITIME PATROL AIRCRAFT
2 - CARRIER BASED ASW AIRCRAFT
3 - AEW AIRCRAFT
6 - HELO

Link 16
AIR PLATFORM
ALL VALUES NOT LISTED BELOW
17 - MARITIME PATROL AIRCRAFT (MPA)
34 - PATROL
15 - ANTISUBMARINE WARFARE (ASW)
16 - AIRBORNE EARLY WARNING AND CONTROL (AEW)
27 or 29 - HELICOPTER GUNSHIP
28 - ATTACK HELICOPTER
29 - HELICOPTER GUNSHIP
30 - ANTISUBMARINE WARFARE HELICOPTER (ASW HELO)
31 - MINE WARFARE HELICOPTER
32 - TRANSPORT HELICOPTER

TABLE C.5.2-M.1-3. M.1/M.81 Message Data Element Translation from the J2.3 Message (Sheet 1 of 2)

Link 11/11B				Link 16			
MESSAGE	FIELD	VALUE	TRANSLATION			VALUE	NOTES
M.1	LABEL	1	REQUIRED	WORD	DATA ELEMENT	2	
			CR	J2.3I	LABEL, J-SERIES SUBLABEL, J-SERIES	3	
	REFERENCE/POSITION INDICATOR	1	None	NA	NA	NA	1
	SPECIAL PROCESSING INDICATOR	AR	None	NA	NA	NA	2, G5
	SIMULATION INDICATOR, 1	RX	=	J2.3I	SIMULATION INDICATOR	RX	G6
	DELTA LATITUDE	AR	None	NA	NA	NA	3
	PU/RU ORIGINATOR	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	G2, G12
	DELTA LONGITUDE	AR	None	NA	NA	NA	3
M.81	LABEL	8	CR	J2.3I	LABEL, J-SERIES SUBLABEL, J-SERIES	2 3	
	PU/RU ORIGINATOR	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	G2, G12
	HELICOPTER CARRYING	0	None	NA	NA	NA	
	HEIGHT/DEPTH	0	None	NA	NA	NA	
	X DOT	AT	CR	J2.3E0	COURSE SPEED	RX RX	G7
	Y DOT	AT	CR	J2.3E0	COURSE SPEED	RX RX	G7
	ORIGINATOR ENVIRONMENT/ CATEGORY	0	CR	J2.3I	LABEL, J-SERIES SUBLABEL, J-SERIES	2 3	
	UNIT TYPE	AT	CR	J2.3C1	SURFACE (MARITIME) PLATFORM	RX	4
	MISSILE UNIT	0	None	NA	NA	NA	
	SCALE INDICATOR	0	None	NA	NA	NA	

C-591

APPENDIX C

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.1-3. M.1/M.81 Message Data Element Translation from the J2.3 Message (Sheet 2 of 2)

NOTES

1. Reference/Position Indicator must be set to 1 indicating the SCC position. This SCC is that of the FJU.
2. On Link 11, the Special Processing Indicator (SPI) of the M.1 message shall be set to the appropriate value for the data following the M.1 message. If the same data source reports both non-SPI and SPI data, the non-SPI M.1 message and data are followed by the SPI M.1 message data.
3. The reported Delta Latitude and Delta Longitude are the offsets showing position of the FJU's SCC referenced to the DLRP. The actual position of the forwarded IU is reported in an M.5 message referenced to the FJU's SCC. All other positional data forwarded by the FJU are also referenced to the FJU's SCC.
4. The M.81 Unit Type is derived from the J2.3 Surface (Maritime) Platform as follows:

Link 11
UNIT TYPE
0 - NO STATEMENT
2 - AIRCRAFT CARRIER
3 - CRUISER
4 - DD/ESCORT (AAW)
7 - FAST PATROL BOAT
8 - LHA/LHD
9 - LCC
10 - FRIGATE
11 - MINE WARFARE VESSEL
12 - AUXILIARY

Link 16
SURFACE (MARITIME) PLATFORM
ALL VALUES NOT LISTED BELOW
1 - AIRCRAFT CARRIER (CV)
2 - BATTLESHIP
3 - CRUISER
4 - DESTROYER
6 - FAST PATROL BOAT
8 - LHA/LHD
9 - AMPHIBIOUS ASSAULT COMMAND SHIP (LCC)
5 - FRIGATE
9 or 14 - MINE WARFARE SHIP
13 - AUXILIARY SHIP

TABLE C.5.2-M.1-4. M.1/M.81 Message Data Element Translation from the J2.4 Message (Sheet 1 of 2)

MESSAGE	Link 11/11B			Link 16			NOTES
	FIELD LABEL	VALUE 1	TRANSLATION REQUIRED CR	WORD J2.4I	DATA ELEMENT LABEL, J-SERIES SUBLABEL, J-SERIES	VALUE 2 4	
M.81	REFERENCE/POSITION INDICATOR	1	None	NA	NA	NA	1
	SPECIAL PROCESSING INDICATOR	AR	None	NA	NA	NA	2, G5
	DELTA LATITUDE	AR	None	NA	NA	NA	3
	PU/RU ORIGINATOR	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	G2, G12
	DELTA LONGITUDE	AR	None	NA	NA	NA	3
	LABEL	8	CR	J2.4I	LABEL, J-SERIES SUBLABEL, J-SERIES	2 4	
	PU/RU ORIGINATOR	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	G2, G12
	HELICOPTER CARRYING	0	None	NA	NA	NA	
	HEIGHT/DEPTH	AT	CR	J2.4I	DEPTH, 15 METERS DEPTH CATEGORY	RX RX	4, G10
	X DOT	AT	CR	J2.4E0	COURSE SPEED	RX RX	G7
	Y DOT	AT	CR	J2.4E0	COURSE SPEED	RX RX	G7
	ORIGINATOR ENVIRONMENT/ CATEGORY	1	CR	J2.4I	LABEL, J-SERIES SUBLABEL, J-SERIES	2 4	
	UNIT TYPE	0	None	NA	NA	NA	
	MISSILE UNIT	0	None	NA	NA	NA	
	SCALE INDICATOR	0	None	NA	NA	NA	

APPENDIX C

TABLE C.5.2-M.1-4. M.1/M.81 Message Data Element Translation from the J2.4 Message (Sheet 2 of 2)

NOTES

1. Reference/Position Indicator must be set to 1 indicating the SCC position. This SCC is that of the FJU.
2. On Link 11, the Special Processing Indicator (SPI) of the M.1 message shall be set to the appropriate value for the data following the M.1 message. If the same data source reports both non-SPI and SPI data, the non-SPI M.1 message and data are followed by the SPI M.1 message data.
3. The reported Delta Latitude and Delta Longitude are the offsets showing position of the FJU's SCC referenced to the DLRP. The actual position of the forwarded IU is reported in an M.5 message referenced to the FJU's SCC. All other positional data forwarded by the FJU are also referenced to the FJU's SCC.
4. If the J2.4I Depth Category field is set to No Statement, Depth, 15 Meters field shall be translated to the Link 11/11B Height/Depth field in accordance with General Note 10. If the J2.4I Depth Category field is set to other than No Statement, the Link 11/11B Height/Depth field shall be set to value 0.

TABLE C.5.2-M.1-5. M.1/M.81 Message Data Element Translation from the J2.5 Message (Sheet 1 of 2)

MESSAGE	Link 11/11B			Link 16			NOTES
	FIELD LABEL	VALUE 1	TRANSLATION REQUIRED CR	WORD J2.5I	DATA ELEMENT LABEL, J-SERIES SUBLABEL, J-SERIES	VALUE 2 5	
M.81	REFERENCE/POSITION INDICATOR	1	None	NA	NA	NA	1
	SIMULATION INDICATOR, 1	RX	=	J2.5I	SIMULATION INDICATOR	RX	G6
	SPECIAL PROCESSING INDICATOR	AR	None	NA	NA	NA	2, G5
	DELTA LATITUDE	AR	None	NA	NA	NA	3
	PU/RU ORIGINATOR	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	G2, G12
	DELTA LONGITUDE	AR	None	NA	NA	NA	3
	LABEL	8	CR	J2.5I	LABEL, J-SERIES SUBLABEL, J-SERIES	2 5	
	PU/RU ORIGINATOR	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	G2, G12
	HELICOPTER CARRYING	0	None	NA	NA	NA	
	HEIGHT/DEPTH	AT	CR	J2.5I	ELEVATION, 25 FT	RX	G10
	X DOT	0	None	NA	NA	NA	
	Y DOT	0	None	NA	NA	NA	
	ORIGINATOR ENVIRONMENT/ CATEGORY	2	CR	J2.5I	LABEL, J-SERIES SUBLABEL, J-SERIES	2 5	
	UNIT TYPE	AT	CR	J2.5C1	LAND (GROUND) PLATFORM	RX	4
	MISSILE UNIT	0	None	NA	NA	NA	
	SCALE INDICATOR	AR	CR	J2.5I	ELEVATION, 25 FT	RX	G10

C-595

APPENDIX C

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.1-5. M.1/M.81 Message Data Element Translation from the J2.5 Message (Sheet 2 of 2)

NOTES

1. Reference/Position Indicator must be set to 1 indicating the SCC position. This SCC is that of the FJU.
2. On Link 11, the Special Processing Indicator (SPI) of the M.1 message shall be set to the appropriate value for the data following the M.1 message. If the same data source reports both non-SPI and SPI data, the non-SPI M.1 message and data are followed by the SPI M.1 message data.
3. The reported Delta Latitude and Delta Longitude are the offsets showing position of the FJU's SCC referenced to the DLRP. The actual position of the forwarded IU is reported in an M.5 message referenced to the FJU's SCC. All other positional data forwarded by the FJU are also referenced to the FJU's SCC.
4. The M.81 Unit Type is derived from the J2.5 Land (Ground) Platform as follows:

Link 11
UNIT TYPE
0 - NO STATEMENT
3 - TSC/MOCC/MARITIME HEADQUARTERS
4 - BUFFER CENTER
10 - ARMY AIR DEFENSE COMMAND POST (AADCP)

Link 16
LAND (GROUND) PLATFORM
ALL VALUES NOT LISTED BELOW
41 - MARITIME HEADQUARTERS
35 - BUFFER CENTER
49 - THEATER HIGH ALTITUDE AREA DEFENSE (THAAD)
50 - JOINT TACTICAL GROUND STATION (JTGS)

TABLE C.5.2-M.1-6. M.1/M.81 Message Data Element Translation from the J2.6 Message (Sheet 1 of 2)

MESSAGE	Link 11/11B			Link 16			NOTES
	FIELD LABEL	VALUE 1	TRANSLATION REQUIRED CR	WORD J2.6I	DATA ELEMENT LABEL, J-SERIES SUBLABEL, J-SERIES	VALUE 2 6	
M.81	REFERENCE/POSITION INDICATOR	1	None	NA	NA	NA	1
	SIMULATION INDICATOR, 1	RX	=	J2.6I	SIMULATION INDICATOR	RX	G6
	SPECIAL PROCESSING INDICATOR	AR	None	NA	NA	NA	2, G5
	DELTA LATITUDE	AR	None	NA	NA	NA	3
	PU/RU ORIGINATOR	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	G2, G12
	DELTA LONGITUDE	AR	None	NA	NA	NA	3
	LABEL	8	CR	J2.6I	LABEL, J-SERIES SUBLABEL, J-SERIES	2 6	
	PU/RU ORIGINATOR	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	G2, G12
	HELICOPTER CARRYING	0	None	NA	NA	NA	
	HEIGHT/DEPTH	AT	CR	J2.6I	ELEVATION, 25 FT	RX	G10
	X DOT	AT	CR	J2.6E0	COURSE SPEED	RX RX	G7
	Y DOT	AT	CR	J2.6E0	COURSE SPEED	RX RX	G7
	ORIGINATOR ENVIRONMENT/ CATEGORY	2	CR	J2.6I	LABEL, J-SERIES SUBLABEL, J-SERIES	2 6	
	UNIT TYPE	AT	CR	J2.6C1	LAND (GROUND) PLATFORM	RX	4
	MISSILE UNIT	0	None	NA	NA	NA	
	SCALE INDICATOR	AR	CR	J2.6I	ELEVATION, 25 FT	RX	G10

C-597

APPENDIX C

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.1-6. M.1/M.81 Message Data Element Translation from the J2.6 Message (Sheet 2 of 2)

NOTES

1. Reference/Position Indicator must be set to 1 indicating the SCC position. This SCC is that of the FJU.
2. On Link 11, the Special Processing Indicator (SPI) of the M.1 message shall be set to the appropriate value for the data following the M.1 message. If the same data source reports both non-SPI and SPI data, the non-SPI M.1 message and data are followed by the SPI M.1 message data.
3. The reported Delta Latitude and Delta Longitude are the offsets showing position of the FJU's SCC referenced to the DLRP. The actual position of the forwarded IU is reported in an M.5 message referenced to the FJU's SCC. All other positional data forwarded by the FJU are also referenced to the FJU's SCC.
4. The M.81 Unit Type is derived from the J2.6 Land (Ground) Platform as follows:

Link 11/11B
UNIT TYPE
0 - NO STATEMENT
3 - TSC/MOCC/MARITIME HEADQUARTERS
4 - BUFFER CENTER
10 - ARMY AIR DEFENSE COMMAND POST (AADCP)

Link 16
LAND (GROUND) PLATFORM
ALL VALUES NOT LISTED BELOW
41 - MARITIME HEADQUARTERS
35 - BUFFER CENTER
49 - THEATER HIGH ALTITUDE AREA DEFENSE (THAAD)
50 - JOINT TACTICAL GROUND STATION (JTGS)

TABLE C.5.2-M.2-1. M.2/M.82 Message Data Element Translation from the J2.2 Message (Sheet 1 of 3)

MESSAGE	Link 11/11B			Link 16			NOTES
	FIELD LABEL	VALUE 2	TRANSLATION REQUIRED CR	WORD J2.2I	DATA ELEMENT LABEL, J-SERIES SUBLABEL, J-SERIES	VALUE 2	
M.2	TRACK NUMBER	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	G13
	IDENTITY	1	None	NA	NA	NA	1
	PRIMARY IDENTITY AMPLIFICATION	AT	CR	J2.2C1	AIR PLATFORM AIR PLATFORM ACTIVITY	RX RX	G20
	SCALE INDICATOR	AR	CR	J2.2I J2.2E0	ALTITUDE, 25 FT LATITUDE, 0.0013 MINUTE LONGITUDE, 0.0013 MINUTE	RX RX RX	2, G10
	TRACK QUALITY	7	None	NA	NA	NA	3
	X COORDINATE	AT	CR	J2.2E0	LATITUDE, 0.0013 MINUTE LONGITUDE, 0.0013 MINUTE	RX RX	G9
	Y COORDINATE	AT	CR	J2.2E0	LATITUDE, 0.0013 MINUTE LONGITUDE, 0.0013 MINUTE	RX RX	G9
	LABEL	8	CR	J2.2I	LABEL, J-SERIES SUBLABEL, J-SERIES	2 2	
	TRACK NUMBER	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	G13
	HEIGHT	AT	CR	J2.2I	ALTITUDE, 25 FT	RX	2, 4, G10
M.82	X DOT	AT	CR	J2.2E0	COURSE SPEED	RX RX	G7
	Y DOT	AT	CR	J2.2E0	COURSE SPEED	RX RX	G7
	SWITCH	0	None	NA	NA	NA	5
	SIZE	AT	CR	J2.2I	STRENGTH	RX	6
	IDENTITY AMPLIFICATION	AT	CR	J2.2CI	AIR PLATFORM AIR PLATFORM ACTIVITY	RX RX	G11
	HEIGHT SOURCE	3	None	NA	NA	NA	7

C-599

APPENDIX C

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.2-1. M.2/M.82 Message Data Element Translation from the J2.2 Message (Sheet 2 of 3)

NOTES

1. The M.2 Identity shall be set to Friend for all J2.2 messages that are forwarded.

2. The Scale Indicator (SI) in the M.2 message may be utilized as follows:

- o SI = 0 Tracks are reported in 500-yard increments up to 512 data miles.
- o SI = 1 Tracks are reported in 31 1/4-yard increments up to 32 data miles.

The Height field in the M.82 message is determined by the Scale Indicator in the M.2 message as follows:

- o SI = 0 Tracks are reported in 500-foot increments up to 127,000 feet.
- o SI = 1 Tracks are reported in 31 1/4-foot increments up to 7,937 1/2 feet.

The FJU may forward all tracks with Scale Indicator set to 0.

3. The Track Quality shall be set to 7 by the FJU.

4. The J2.2 altitude reported in excess of 127,000 feet shall be forwarded as Unknown.

5. The M.82 Switch shall always be set to 0 since a J2.2 message will never be forwarded as a nonreal-time track.

6. The Strength field values in the J2.2 message will be converted to the Size values in the M.82 message as follows:

APPENDIX C

TABLE C.5.2-M.2-1. M.2/M.82 Message Data Element Translation from the J2.2 Message (Sheet 3 of 3)

NOTES (Continued)

6. (Continued)

Link 11/11B	Link 16
SIZE	STRENGTH
0	0
1	1
2	2-7, 13
3	8-12, 14, 15

7. The Height Source shall be set to 3 by the FJU to indicate the data were reported by the aircraft.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-M.2-2. M.2/M.82 Message Data Element Translation from the J3.2 Message (Sheet 1 of 4)

MESSAGE	Link 11/11B				Link 16		
	FIELD LABEL	VALUE 2	TRANSLATION		DATA ELEMENT LABEL, J-SERIES SUBLABEL, J-SERIES	VALUE 3 2	NOTES
			REQUIRED	WORD J3.2I			
M.2	TRACK NUMBER	AT	CR	J3.2I	TRACK NUMBER, REFERENCE	RX	G13
	IDENTITY	AT	CR	J3.2I	EXERCISE INDICATOR IDENTITY IDENTITY AMPLIFYING DESCRIPTOR	RX RX RX	G20
	PRIMARY IDENTITY AMPLIFICATION	AT	CR	J3.2I	EXERCISE INDICATOR IDENTITY IDENTITY AMPLIFYING DESCRIPTOR	RX RX RX	1, G20
				J3.2C1	AIR SPECIFIC TYPE INDICATOR AIR PLATFORM AIR PLATFORM ACTIVITY	RX RX RX	
	SCALE INDICATOR	AR	CR	J3.2I J3.2E0	ALTITUDE, 25 FT LATITUDE, 0.0051 MINUTE LONGITUDE, 0.0051 MINUTE	RX RX RX	2, G10
	TRACK QUALITY	AT	CR	J3.2I	TRACK QUALITY	RX	3
	X COORDINATE	AT	CR	J3.2E0	LATITUDE, 0.0051 MINUTE LONGITUDE, 0.0051 MINUTE	RX RX	G9
	Y COORDINATE	AT	CR	J3.2E0	LATITUDE, 0.0051 MINUTE LONGITUDE, 0.0051 MINUTE	RX RX	G9
	LABEL	8	CR	J3.2I	LABEL, J-SERIES SUBLABEL, J-SERIES	3 2	
	TRACK NUMBER	AT	CR	J3.2I	TRACK NUMBER, REFERENCE	RX	G13
M.82	HEIGHT	AT	CR	J3.2I	ALTITUDE, 25 FT	RX	2, 4, G10
	X DOT	AT	CR	J3.2E0	COURSE SPEED	RX RX	5, G7
	Y DOT	AT	CR	J3.2E0	COURSE SPEED	RX RX	5, G7

C-603

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-M.2-2. M.2/M.82 Message Data Element Translation from the J3.2 Message (Sheet 2 of 4)

Link 11/11B					Link 16		
MESSAGE	FIELD	TRANSLATION			DATA ELEMENT	VALUE	NOTES
		VALUE	REQUIRED	WORD			
M.82 (Cont'd)	TIME	AT	CR	J3.2C1	HOUR MINUTE	RX RX	5, G15
	SWITCH	AR	None	NA	NA	NA	5
	SIZE	AT	CR	J3.2I	STRENGTH	RX	6
	IDENTITY AMPLIFICATION	AT	CR	J3.2I	EXERCISE INDICATOR	RX	1, G20
					IDENTITY	RX	
					IDENTITY AMPLIFYING	RX	
					DESCRIPTOR		
				J3.2C1	AIR SPECIFIC TYPE INDICATOR	RX	
	HEIGHT SOURCE	RX	=	J3.2I	AIR PLATFORM	RX	
					AIR PLATFORM ACTIVITY	RX	
					ALTITUDE SOURCE	RX	

APPENDIX C

TABLE C.5.2-M.2-2. M.2/M.82 Message Data Element Translation from the J3.2 Message (Sheet 3 of 4)

NOTES

1. If Air Specific Type Indicator is received as value 1, Link 11/11B PRI AMP and ID AMP fields will be set to No Statement, except when data other than No Statement is held in the FJU database, in which case data held will be forwarded. In all cases data shall be forwarded in accordance with General Note 20.

2. The Scale Indicator in the M.2 message may be utilized as follows:

- o SI = 0 Tracks are reported in 500-yard increments up to 511 3/4 data miles.
- o SI = 1 Tracks are reported in 31 1/4-yard increments up to 32 data miles.

The Height field in the M.82 message is determined by the Scale Indicator in the M.2 message as follows:

- o SI = 0 Tracks are reported in 500-foot increments up to 127,000 feet.
- o SI = 1 Tracks are reported in 31 1/4-foot increments up to 7,937 1/2 feet.

The FJU may forward all tracks with the Scale Indicator set to 0.

3. The Track Quality values 0-7 in the J3.2 message will be reported as identical values in the M.2 message on Link 11/11B. All other Track Quality values (8-15) in the J3.2 message will be converted to a Track Quality of 7 in the M.2 message.

4. The J3.2 altitude reported in excess of 127,000 feet shall be forwarded as Unknown.

APPENDIX C

TABLE C.5.2-M.2-2. M.2/M.82 Message Data Element Translation from the J3.2 Message (Sheet 4 of 4)

NOTES (Continued)

5. The Switch (SW) in the M.82 message determines when the M.82 message will contain Time or Velocity (X Dot, Y Dot). Time is transmitted for nonreal-time tracks (NRT) only. If the J3.2 message reports an NRT and velocity is available, the FJU will transmit an M.2/M.82 (SW=1) message reflecting time, followed by a second M.2/M.82 (SW=0) message reflecting velocity.

6. The Strength field values in the J3.2 message will be converted to the Size values in the M.82 message as follows:

Link 11/11B	Link 16
SIZE	STRENGTH
0	0
1	1
2	2-7, 13
3	8-12, 14, 15

TABLE C.5.2-M.2-3. M.2/M.82 Message Data Element Translation from the J3.6 Message (Sheet 1 of 4)

Link 11/11B				Link 16			
MESSAGE	FIELD	VALUE	TRANSLATION REQUIRED	WORD	DATA ELEMENT	VALUE	NOTES
M.2	LABEL	2	CR	J3.6I	LABEL, J-SERIES SUBLABEL, J-SERIES	3 6	
	TRACK NUMBER	RX	=	(See Note 1)	(See Note 1)	RX	1
	IDENTITY	AT	CR	J3.6I	EXERCISE INDICATOR IDENTITY IDENTITY AMPLIFYING DESCRIPTOR	RX RX RX	2
	PRIMARY IDENTITY AMPLIFICATION	AT	CR	J3.6I	EXERCISE INDICATOR IDENTITY IDENTITY AMPLIFYING DESCRIPTOR	RX RX RX	2
	SCALE INDICATOR	AR	CR	J3.6E0	X POSITION IN WGS-84 Y POSITION IN WGS-84	RX RX	3
	TRACK QUALITY	1	None	NA	NA	NA	4
	X COORDINATE	AT	CR	J3.6E0 J3.6E1	X POSITION IN WGS-84 Y POSITION IN WGS-84 Z POSITION IN WGS-84	RX RX RX	5
	Y COORDINATE	AT	CR	J3.6E0 J3.6E1	X POSITION IN WGS-84 Y POSITION IN WGS-84 Z POSITION IN WGS-84	RX RX RX	5
	LABEL	8	CR	J3.6I	LABEL, J-SERIES SUBLABEL, J-SERIES	3 6	
	TRACK NUMBER	RX	=	(See Note 1)	(See Note 1)	RX	1
	HEIGHT	255	None	NA	NA	NA	
	X DOT	AT	CR	J3.6E0 J3.6E1	X VELOCITY IN WGS-84 Y VELOCITY IN WGS-84 Z VELOCITY IN WGS-84	RX RX RX	6
	Y DOT	AT	CR	J3.6E0 J3.6E1	X VELOCITY IN WGS-84 Y VELOCITY IN WGS-84 Z VELOCITY IN WGS-84	RX RX RX	6

C-607

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-M.2-3. M.2/M.82 Message Data Element Translation from the J3.6 Message (Sheet 2 of 4)

Link 11/11B					Link 16		
<u>MESSAGE</u> M.82 (Cont'd)	<u>FIELD</u> TIME	<u>TRANSLATION</u>			<u>DATA ELEMENT</u> NA	<u>VALUE</u> NA	<u>NOTES</u>
		<u>VALUE</u> NA	<u>REQUIRED</u> None	<u>WORD</u> NA			
	SWITCH	0	None	NA	NA	NA	
	SIZE	0	None	NA	NA	NA	
	IDENTITY AMPLIFICATION	AT	CR	J3.6I	EXERCISE INDICATOR IDENTITY IDENTITY AMPLIFYING DESCRIPTOR	RX RX RX	2
	HEIGHT SOURCE	0	None	NA	NA	NA	

APPENDIX C

TABLE C.5.2-M.2-3. M.2/M.82 Message Data Element Translation from the J3.6 Message (Sheet 3 of 4)

NOTES

1. The FJU shall provide the Link 11/11B Track Number from its TN pool.
2. If the Link 16 Exercise Indicator = 0, ID, PRI AMP, and ID AMP are translated from Identity as follows:

Link 11/11B		Link 16	
IDENTITY	PRIMARY IDENTITY AMPLIFICATION	IDENTITY AMPLIFICATION	IDENTITY
0 - UNKNOWN	0 - PENDING	0 - NO STATEMENT	0 - PENDING
	1 - UNKNOWN	0 - NS	1 - UNKNOWN
	2 - ASSUMED FRIEND	0 - NS	2 - ASSUMED FRIEND
	3 - SUSPECT	0 - NS	5 - SUSPECT
1 - FRIEND	0 - GENERAL	1 - NEUTRAL	4 - NEUTRAL
		3 - MISSILE	3 - FRIEND
2 - HOSTILE	0 - GENERAL	1 - MISSILE	6 - HOSTILE

If the Link 16 Exercise Indicator = 1, ID is set to 1 (Friend), PRI AMP is set to 0 (General), and ID AMP is set to 3 (Missile).

3. The Scale Indicator in the M.2 message may be utilized as follows:
 - o SI = 0 Tracks are reported in 500-yard increments up to 511 3/4 data miles.
 - o SI = 1 Tracks are reported in 31 1/4-yard increments up to 31 63/64 data miles.

The FJU may forward all tracks with the Scale Indicator set to 0.

4. The Link 11/11B Track Quality field is set artificially to a TQ of 1.
5. The Link 11/11B position (X Coordinate and Y Coordinate) is derived from the J3.6E0 X Position in WGS-84, J3.6E0 Y Position in WGS-84 and J3.6E1 Z Position in WGS-84 fields.

APPENDIX C

TABLE C.5.2-M.2-3. M.2/M.82 Message Data Element Translation from the J3.6
Message (Sheet 4 of 4)

NOTES (Continued)

6. The Link 11/11B course and speed (X Dot and Y Dot) are derived from the J3.6E0 X Velocity in WGS-84, J3.6E1 Y Velocity in WGS-84 and J3.6E1 Z Velocity in WGS-84 fields.

TABLE C.5.2-M.3-1. M.3/M.83 Message Data Element Translation from the J2.3 Message (Sheet 1 of 4)

Link 11/11B				Link 16			
MESSAGE	FIELD	VALUE	TRANSLATION	WORD	DATA ELEMENT	VALUE	NOTES
			REQUIRED				
M.3	LABEL	3	CR	J2.3I	LABEL, J-SERIES SUBLABEL, J-SERIES	2 3	
	TRACK NUMBER	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	G13
	IDENTITY	1	None	NA	NA	NA	1
	PRIMARY IDENTITY AMPLIFICATION	AT	CR	J2.3C1	SURFACE (MARITIME) PLATFORM	RX	G21
	SCALE INDICATOR	AR	CR	J2.3E0	LATITUDE, 0.0013 MINUTE LONGITUDE, 0.0013 MINUTE	RX RX	2, G10
	TRACK QUALITY	7	None	NA	NA	NA	3
	X COORDINATE	AT	CR	J2.3E0	LATITUDE, 0.0013 MINUTE LONGITUDE, 0.0013 MINUTE	RX RX	G9
	Y COORDINATE	AT	CR	J2.3E0	LATITUDE, 0.0013 MINUTE LONGITUDE, 0.0013 MINUTE	RX RX	G9
M.83	LABEL	8	CR	J2.3I	LABEL, J-SERIES SUBLABEL, J-SERIES	2 3	
	TRACK NUMBER	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	G13
	UNIT CAPABILITY	0	None	NA	NA	NA	
	CURRENT MISSION	AT	CR	J2.3C1	SURFACE (MARITIME) PLATFORM ACTIVITY	RX	4
	X DOT	AT	CR	J2.3E0	COURSE SPEED	RX RX	G7
	Y DOT	AT	CR	J2.3E0	COURSE SPEED	RX RX	G7
	SWITCH	0	None	NA	NA	NA	5
	SIZE	AT	CR	J2.3I	STRENGTH	RX	6

C-611

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-M.3-1. M.3/M.83 Message Data Element Translation from the J2.3 Message (Sheet 2 of 4)

Link 11/11B					Link 16		
MESSAGE	FIELD	TRANSLATION			DATA ELEMENT	VALUE	NOTES
		VALUE	REQUIRED	WORD			
M.83 (Cont'd)	IDENTITY AMPLIFICATION	AT	CR	J2.3C1	SURFACE (MARITIME) PLATFORM	RX	G21
					SURFACE (MARITIME) PLATFORM ACTIVITY	RX	
	HELICOPTER CARRYING	0	None	NA	NA	NA	

APPENDIX C

TABLE C.5.2-M.3-1. M.3/M.83 Message Data Element Translation from the J2.3 Message (Sheet 3 of 4)

NOTES

1. The M.3 Identity shall be set to Friend for all J2.3 messages that are forwarded.

2. The M.3 Scale Indicator is determined as follows:

- o SI = 0 Tracks are reported in 31 1/4-yard increments up to 32 data miles.
- o SI = 1 Tracks are reported in 500-yard increments up to 511 3/4 data miles.

The FJU may forward all tracks with SI = 1.

3. The Track Quality shall be set to 7 by the FJU.

4. The J2.3C1 Surface (Maritime) Platform Activity will be translated to the M.83 Current Mission as follows:

<u>Link 11/11B</u>	<u>Link 16</u>
<u>CURRENT MISSION</u>	<u>SURFACE (MARITIME) PLATFORM ACTIVITY</u>
0	0-4, 7, 9-11, 15-17, 20, 21, 24-27, 29, 31, 34, 35, 38-127
1	23
2	18
3	12
4	30
5	8, 36, 37
6	22
7	6, 32, 33
8	14
9	19
10	28
11	13
13	5

5. The M.83 Switch shall always be set to 0 since a J2.3 message will never be forwarded as a nonreal-time track.

APPENDIX C

TABLE C.5.2-M.3-1. M.3/M.83 Message Data Element Translation from the J2.3 Message (Sheet 4 of 4)

NOTES (Continued)

6. The J2.3I Strength values will be converted to the M.83 Size values as follows:

Link 11/11B	Link 16
SIZE	STRENGTH
0	0
1	1
2	2-7, 13
3	8-12, 14, 15

TABLE C.5.2-M.3-2. M.3/M.83 Message Data Element Translation from the J3.3 Message (Sheet 1 of 5)

Link 11/11B				Link 16			
MESSAGE	FIELD	VALUE	TRANSLATION REQUIRED	WORD	DATA ELEMENT	VALUE	NOTES
M.3	LABEL	3	CR	J3.3I	LABEL, J-SERIES SUBLABEL, J-SERIES	3 3	
	TRACK NUMBER	AT	CR	J3.3I	TRACK NUMBER, REFERENCE	RX	G13
	IDENTITY	AT	CR	J3.3I	EXERCISE INDICATOR IDENTITY IDENTITY AMPLIFYING DESCRIPTOR	RX RX RX	G21
	PRIMARY IDENTITY AMPLIFICATION	AT	CR	J3.3I	EXERCISE INDICATOR IDENTITY IDENTITY AMPLIFYING DESCRIPTOR	RX RX RX	G21
				J3.3C1	SURFACE (MARITIME) PLATFORM SURFACE (MARITIME) PLATFORM ACTIVITY	RX RX	
	SCALE INDICATOR	AR	CR	J3.3E0	LATITUDE, 0.0051 MINUTE LONGITUDE, 0.0051 MINUTE	RX RX	1,G10
	TRACK QUALITY	AT	CR	J3.3I	TRACK QUALITY	RX	2
	X COORDINATE	AT	CR	J3.3E0	LATITUDE, 0.0051 MINUTE LONGITUDE, 0.0051 MINUTE	RX RX	G9
	Y COORDINATE	AT	CR	J3.3E0	LATITUDE, 0.0051 MINUTE LONGITUDE, 0.0051 MINUTE	RX RX	G9
M.83	LABEL	8	CR	J3.3I	LABEL, J-SERIES SUBLABEL, J-SERIES	3 3	
	TRACK NUMBER	AT	CR	J3.3I	TRACK NUMBER, REFERENCE	RX	G13
	UNIT CAPABILITY	0	None	NA	NA	NA	
	CURRENT MISSION	AT	CR	J3.3C1	SURFACE (MARITIME) PLATFORM ACTIVITY	RX	3
	X DOT	AT	CR	J3.3E0	COURSE SPEED	RX RX	4,G7

C-615

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-M.3-2. M.3/M.83 Message Data Element Translation from the J3.3 Message (Sheet 2 of 5)

Link 11/11B					Link 16		
MESSAGE	FIELD	TRANSLATION			DATA ELEMENT	VALUE	NOTES
		VALUE	REQUIRED	WORD			
M.83 (Cont'd)	Y DOT	AT	CR	J3.3E0	COURSE SPEED	RX RX	4, G7
	TIME	AT	CR	J3.3C1	HOURL MINUTE	RX RX	4, G15
	SWITCH	AR	None	NA	NA	NA	4
	SIZE	AT	CR	J3.3I	STRENGTH	RX	5
	IDENTITY AMPLIFICATION	AT	CR	J3.3I	EXERCISE INDICATOR	RX	G21
					IDENTITY	RX	
					IDENTITY AMPLIFYING DESCRIPTOR	RX	
				J3.3C1	SURFACE (MARITIME) PLATFORM SURFACE (MARITIME) PLATFORM ACTIVITY	RX RX	
	HELICOPTER CARRYING	0	None	NA	NA	NA	

APPENDIX C

TABLE C.5.2-M.3-2. M.3/M.83 Message Data Element Translation from the J3.3 Message (Sheet 3 of 5)

NOTES

1. The Scale Indicator in the M.3 message is determined as follows:

- o SI = 0 Tracks are reported in 31 1/4-yard increments up to 32 data miles.
- o SI = 1 Tracks are reported in 500-yard increments up to 512 data miles.

The FJU may forward all tracks with the Scale Indicator set to 1.

2. The J3.3I Track Quality (TQ) values 0-7 will be reported as identical values in the M.3 on Link 11/11B. All other J3.3I TQ values (8-15) will be converted to M.3 TQ of 7.

3. The J3.3C1 Surface (Maritime) Platform Activity will be translated to the M.83 Current Mission as follows:

 Link 11/11B

 CURRENT MISSION

0 - NO STATEMENT

 Link 16

 SURFACE (MARITIME) PLATFORM
ACTIVITY

0 - NO STATEMENT
 1 - AIR WARFARE SUPPORT
 2 - OVER THE HORIZON TARGETING
 (OHT)
 3 - TRAINING
 4 - LOGISTICS SUPPORT
 7 - FISHERY PROTECTION
 9 - ESCORTING
 10 - MINELAYING
 11 - TRANSITING
 15 - INTELLIGENCE COLLECTING
 16 - PATROL
 17 - TRANSPORT
 20 - TOWING
 21 - SPECIAL WARFARE
 24 - FISHING
 25 - PICKETING
 26 - MINE COUNTERMEASURES

APPENDIX C

TABLE C.5.2-M.3-2. M.3/M.83 Message Data Element Translation from the J3.3 Message (Sheet 4 of 5)

NOTES (Continued)

3. (Continued)

<u>Link 11/11B</u>	<u>Link 16</u>
<u>CURRENT MISSION</u>	<u>SURFACE (MARITIME) PLATFORM ACTIVITY</u>
1 - AAW	27 - MINE WARFARE
2 - ASW	29 - NONCOMBATANT OPERATIONS
3 - NAVAL GUNFIRE SUPPORT	31 - SURVEYING
4 - UNDERWAY REPLENISHMENT	34 - FLIGHT OPERATIONS
5 - PLANE GUARD/SAR	35 - VIDEO DATA LINKING (TARGETING)
	38-49 - UNDEFINED
	50 - RETURN TO BASE (RTB)
	51-114 - UNDEFINED
	115-126 - SURFACE (MARITIME) ACTIVITY 1 THROUGH 12
	127 - RESET TO NO STATEMENT
6 - STRIKE	23 - ANTIAIR WARFARE
7 - EW	18 - ANTISUBMARINE WARFARE (ASW)
	12 - NAVAL GUNFIRE SUPPORT
	30 - UNDERWAY REPLENISHMENT
	8 - SEARCH AND RESCUE (SAR)
	36 - PLANE GUARD
	37 - RESCUE SHIP/LIFEGUARD
	22 - STRIKE WARFARE
	6 - ELECTRONIC WARFARE (EW)
	32 - ELECTRONIC WARFARE SUPPORT (ES)
	33 - ELECTRONIC ATTACK (EA)
8 - AMPHIBIOUS ASSAULT	14 - AMPHIBIOUS WARFARE
9 - SHADOWER	19 - SHADOWING/INTERVENING
10 - MARKER	28 - MARKING
11 - INTRUDER	13 - INTRUDING
13 - ANTI-SURFACE WARFARE	5 - ANTISURFACE WARFARE

4. The M.83 Switch determines when the M.83 will contain time or velocity (X Dot, Y Dot). Time is transmitted for NRT only. If the J3.3 message reports an NRT and velocity is available, the FJU will transmit an M.3/M.83(SW=1) reflecting time, and a second M.3/M.83(SW=0) reflecting velocity.

5. The J3.3I Strength values will be converted to the M.83 Size values as follows:

APPENDIX C

TABLE C.5.2-M.3-2. M.3/M.83 Message Data Element Translation from the J3.3 Message (Sheet 5 of 5)

NOTES (Continued)

5. (Continued)

Link 11/11B	Link 16
SIZE	STRENGTH
0	0
1	1
2	2-7, 13
3	1, 8-12, 14

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-M.4A-1. M.4A/M.84A Message Data Element Translation from the J2.4 Message (Sheet 1 of 5)

Link 11/11B				Link 16			
MESSAGE	FIELD	VALUE	TRANSLATION REQUIRED	WORD	DATA ELEMENT	VALUE	NOTES
M.4A	LABEL	4	CR	J2.4I	LABEL, J-SERIES SUBLABEL, J-SERIES	2 4	
	TRACK NUMBER	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	G13
	IDENTITY	1	None	NA	NA	NA	1
	DATA REPORT TYPE	AT	CR	J2.4I	DEPTH CATEGORY	RX	2
	NONREAL-TIME INDICATOR	0	None	NA	NA	NA	3
	SCALE INDICATOR	AR	CR	J2.4E0	LATITUDE, 0.0103 MINUTE LONGITUDE, 0.0103 MINUTE	RX RX	4, G9
	SUB LABEL	0	CR	J2.4I	LABEL, J-SERIES SUBLABEL, J-SERIES	2 4	
	X COORDINATE	AT	CR	J2.4I	DISPLACED POSITION INDICATOR	RX	5
				J2.4E0 or	LATITUDE, 0.0013 MINUTE	RX	G9
				J2.4C4	LONGITUDE, 0.0013 MINUTE	RX	
					LATITUDE, 0.0103 MINUTE	RX	G9
					LONGITUDE, 0.0103 MINUTE	RX	
	Y COORDINATE	AT	CR	J2.4I	DISPLACED POSITION INDICATOR	RX	5
				J2.4E0 or	LATITUDE, 0.0013 MINUTE	RX	G9
				J2.4C4	LONGITUDE, 0.0013 MINUTE	RX	
					LATITUDE, 0.0103 MINUTE	RX	G9
					LONGITUDE, 0.0103 MINUTE	RX	
M.84A	LABEL	8	CR	J2.4I	LABEL, J-SERIES SUBLABEL, J-SERIES	2 4	
	ASW POINT TYPE	0	None	NA	NA	NA	6
	CLASSIFICATION	3	None	NA	NA	NA	7
	COURSE/BEARING	AT	CR	J2.4E0	COURSE	RX	9
	CLASSIFICATION AMPLIFICATION	AT	CR	J2.4C1	SUBSURFACE (MARITIME) PLATFORM	RX	8

C-621

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-M.4A-1. M.4A/M.84A Message Data Element Translation from the J2.4 Message (Sheet 2 of 5)

Link 11/11B					Link 16		
MESSAGE M.84A (Cont'd)	FIELD DEPTH	TRANSLATION			DATA ELEMENT DEPTH, 15 METERS	VALUE RX	NOTES 10, G11
		VALUE AT	REQUIRED CR	WORD J2.4I			
	DEPTH INDICATOR	AT	CR	J2.4I	DEPTH, 15 METERS	RX	10, G11
					DEPTH CATEGORY	RX	
	SENSOR	0	None	NA	NA	NA	
	NOTACK DURATION	0	None	NA	NA	NA	
	NOTACK RADIUS	0	None	NA	NA	NA	
	COURSE/BEARING INDICATOR	AT	CR	J2.4E0	COURSE	RX	9
	SPEED	AT	CR	J2.4E0	SPEED	RX	11
	POSSIBLE SUBMARINE	0	None	NA	NA	NA	

APPENDIX C

TABLE C.5.2-M.4A-1. M.4A/M.84A Message Data Element Translation from the J2.4 Message (Sheet 3 of 5)

NOTES

1. The M.4A Identity shall be set to Friend for all J2.4 messages that are forwarded.
2. The Data Report Type shall be set to value 0 (Subsurface Track) for all J2.4 messages that are forwarded when Depth Category is set to a value other than 1 (Surfaced). If Depth Category is set to Surfaced, then Data Report Type shall be set to value 1 (Surfaced Submarine).
3. The Nonreal-Time Indicator (NRT) shall be set to No Statement for all J2.4 messages that are forwarded.
4. The Scale Indicator in the M.4A is determined as follows:
 - o SI=0 Tracks are reported in 31 1/4 yard increments up to 32 data miles.
 - o SI=1 Tracks are reported in 500 yard increments up to 512 data miles.

The FJU may forward all tracks with the Scale Indicator set to 1.

5. The unit position is translated from the J2.4E0 if the Displaced Position Indicator is set to 0 and from the J2.4C4 if the Displaced Position Indicator is set to 1.
6. When Data Report Type in the M.4A equals 0 or 1, this field is Spare.
7. The Classification shall be set to Certain Submarine for all J2.4 messages that are forwarded.
8. The M.84A Classification Amplification field is determined from the J2.4C1 Subsurface (Maritime) Platform as follows:

APPENDIX C

NOTES (Continued)

Link 11/11B	Link 16
CLASSIFICATION AMPLIFICATION	SUBSURFACE (MARITIME) PLATFORM
0	0 or 63
1	1, 28, 29
2	2-8, 35, 36
3	9-17, 33, 34, 37

Link 11/11B		Link 16
COURSE/BEARING		
INDICATOR	COURSE/BEARING	COURSE
0	0 (NOT INTERPRETED)	360-510 - ILLEGAL
1	0-255 - 0 THROUGH 358 152/256 DEGREES	511 - NO STATEMENT 0-359 - 0 THROUGH 359 DEGREES

10. When the J2.4 Depth, 15 Meters field is set to No Statement, the Depth Indicator field shall be set to value one and the Depth field determined as follows:

C-624

APPENDIX C

TABLE C.5.2-M.4A-1. M.4A/M.84A Message Data Element Translation from the J2.4 Message (Sheet 5 of 5)

NOTES (Continued)

10. (Continued)

<u>Link 11/11B</u>	<u>Link 16</u>
<u>DEPTH</u>	<u>DEPTH CATEGORY</u>
8 - BELOW BOTTOM LAYER	8 - BELOW BOTTOM LAYER
9 - ESTIMATED DEEP	9 - ESTIMATED DEEP
10 - BOTTOMED	10 - BOTTOMED

When the J2.4 Depth, 15 Meters field is set to other than No Statement, the Depth Indicator shall be set to value 0. Depth shall be translated in accordance with General Note 11.

11. The M.84A Speed is in 1 data mile per hour increments; and the J2.4E0 Speed is in 0.5 data mile per hour increments. The J2.4E0 Speed values 0-252 (0-126 data miles per hour) shall be translated to the equivalent M.84A Speed, with 0.5 data mile per hour increments arbitrarily rounded to the higher data mile. The J2.4E0 Speed values 253-510 (126.5-255 data miles per hour) shall be translated to the M.84A Speed value 126 (126 data miles per hour). The J2.4E) Speed value 511 (No Statement) shall be translated to M.84A Speed value 127 (No Statement).

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-M.4A-2. M.4A/M.84A Message Data Element Translation from the J3.0 Message (Sheet 1 of 6)

MESSAGE	Link 11/11B			Link 16		
	FIELD	VALUE	TRANSLATION	DATA ELEMENT	VALUE	NOTES
M.4A	LABEL	4	REQUIRED	WORD	3	
	TRACK NUMBER	AT	CR	J3.0I	TRACK NUMBER, REFERENCE	RX G13
	IDENTITY	0	None	NA	NA	NA
	DATA REPORT TYPE	3	CR	J3.0I	POINT TYPE POINT AMPLIFICATION	7 or 8 RX 1
	NONREAL-TIME INDICATOR	0	None	NA	NA	NA
	SCALE INDICATOR	AR	CR	J3.0E0	LATITUDE, 0.0103 MINUTE LONGITUDE, 0.0103 MINUTE	RX RX 2, G9
	SUB LABEL	0	CR	J3.0I	SUBLABEL, J-SERIES	0
	X COORDINATE	AT	CR	J3.0E0	LATITUDE, 0.0103 MINUTE LONGITUDE, 0.0103 MINUTE	RX RX G9
	Y COORDINATE	AT	CR	J3.0E0	LATITUDE, 0.0103 MINUTE LONGITUDE, 0.0103 MINUTE	RX RX G9
M.84A	LABEL	8	CR	J3.0I	LABEL, J-SERIES SUBLABEL, J-SERIES	3 0
	ASW POINT TYPE	AT	CR	J3.0I	POINT TYPE POINT AMPLIFICATION	7 or 8 RX 1
	CLASSIFICATION	0	None	NA	NA	NA
	COURSE/BEARING	AT	CR	J3.0C2	COURSE	RX 3
	AXIS ORIENTATION	RX	=	J3.0C5	AXIS ORIENTATION	RX
	CLASSIFICATION AMPLIFICATION	0	None	NA	NA	NA
	DEPTH	0	None	NA	NA	NA
	TORPEDO TYPE	RX	CR	J3.0C5	SUBSURFACE (MARITIME) AMPLIFICATION	RX G15
	AREA MAJOR AXIS	RX	=	J3.0C5	AREA MAJOR AXIS, 4	RX

C-627

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-M.4A-2. M.4A/M.84A Message Data Element Translation from the J3.0 Message (Sheet 2 of 6)

MESSAGE	Link 11/11B				Link 16		
	FIELD	VALUE	TRANSLATION		DATA ELEMENT	VALUE	NOTES
			REQUIRED	WORD			
M.84A (Cont'd)	AREA MINOR AXIS	RX	=	J3.0C5	AREA MINOR AXIS, 4	RX	
	DEPTH INDICATOR	1	None	NA	NA	NA	
	SENSOR	0	None	NA	NA	NA	
	NOTACK DURATION	AT	CR	J3.0I	POINT AMPLIFICATION TIME FUNCTION MINUTE HOUR	6 2 RX RX	4
	NOTACK RADIUS	AT	CR	J3.0I J3.0C2	POINT AMPLIFICATION SQUARE/CIRCLE SWITCH AREA MAJOR AXIS AREA MINOR AXIS	6 RX RX RX	5
	COURSE/BEARING INDICATOR	AT	CR	J3.0C2	COURSE	RX	3
	SPEED	AT	CR	J3.0C2	SPEED	RX	6
	SQUARE/CIRCLE SWITCH, 1	RX	=	J3.0C5	SQUARE/CIRCLE SWITCH	RX	
	FWDA DURATION	AT	CR	J3.0I	TIME FUNCTION MINUTE HOUR	2 RX RX	7
	POSSIBLE SUBMARINE	0	None	NA	NA	NA	

C-628

APPENDIX C

TABLE C.5.2-M.4A-2. M.4A/M.84A Message Data Element Translation from the J3.0 Message (Sheet 3 of 6)

NOTES

1. The ASW Point Type field will be determined from the J3.0I Point Type and Point Amplification fields as follows:

Link 11/11B	Link 16	
ASW POINT TYPE	POINT TYPE	POINT AMPLIFICATION
0 - NO STATEMENT	7 - ASW	0 - NO STATEMENT
		14, 15 - UNDEFINED
1 - SINKER		1 - SINKER
2 - BRIEF CONTACT		2 - BRIEF CONTACT
3 - ASW SEARCH CENTER		3 - SEARCH CENTER (ASW)
4 - SONOBUOY PATTERN REFERENCE POSITION		10 - SONOBUOY PATTERN REFERENCE POSITION
5 - ASW STATION	8 - ASW, 1	2 - ASW STATION
6 - CHARTED WRECK		0 - CHARTED WRECK
9 - BOTTOMED NONSUBMARINE		1 - BOTTOMED NONSUBMARINE
10 - FIX	7 - ASW	5 - FIX (ASW)
11 - ESTIMATED POSITION		4 - ESTIMATED POSITION (EP)
12 - NOTACK AREA		6 - NOTACK AREA
13 - FRIENDLY WEAPON DANGER AREA (FWDA)		13 - FRIENDLY WEAPON DANGER AREA (FWDA)

2. The Scale Indicator in the M.4A message is determined as follows:

- o SI=0 Tracks are reported in 31 1/4 yard increments up to 32 data miles.
- o SI=1 Tracks are reported in 500-yard increments up to 511 3/4 data miles.

The FJU may forward all tracks with SI=1.

3. The M.84A Course/Bearing and Course/Bearing Indicator (CBI) fields are determined by the J3.0 Course field as follows:

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.4A-2. M.4A/M.84A Message Data Element Translation from the J3.0 Message (Sheet 4 of 6)

NOTES (Continued)

3. (Continued)

Link 11/11B		Link 16
COURSE/BEARING		
INDICATOR	COURSE/BEARING	COURSE
0	0 (NOT INTERPRETED)	360-510 - ILLEGAL
1	0-255 - 0 THROUGH 358 152/256 DEGREES	511 - NO STATEMENT 0-359 - 0 THROUGH 359 DEGREES

Link 16 Course is in 1 degree increments, and Link 11/11B Course/Bearing is in 360/256 degree increments. Translate Link 16 to the nearest Link 11/11B increment (.5 rounded up).

4. The NOTACK Duration will be interpreted from the J3.0I Time Function, Minute, and Hours fields. Two J3.0 messages are required to report a NOTACK Area. One message contains the time of activation and the other message contains the time of deactivation. NOTACK Duration shall be forwarded after both J3.0 messages have been received. The NOTACK Duration is determined by subtracting the Activation Time from the Deactivation Time (DT-AT). If both J3.0 messages are not received within 12 seconds, NOTACK Duration shall be forwarded as value 3, 2 hours.

Link 11/11B	Link 16	
NOTACK DURATION	HOUR	MINUTE
0 - 1 HOUR	0	31-59
	1	0
1 - 30 MINUTES	0	0-30
2 - 1 HOUR 30 MINUTES	1	1-30
3 - 2 HOURS	1	31-59
	2-23	ANY

5. When J3.0I Point Amplification = 6 and a value of 1 or 2 is received in the J3.0C2 Square/Circle Switch field, the area will be interpreted as a circle with the NOTACK Radius determined from the Area Major Axis and Area Minor Axis field, whichever is larger, as follows:

APPENDIX C

TABLE C.5.2-M.4A-2. M.4A/M.84A Message Data Element Translation from the J3.0 Message (Sheet 5 of 6)

NOTES (Continued)

5. (Continued)

Link 11/11B	Link 16	
NOTACK RADIUS	AREA MAJOR AXIS	AREA MINOR AXIS
0 - 10 DM	3 (12 DM)	3 (12 DM)
	63 - NO STATEMENT	63 - NO STATEMENT
1 - 5 DM	0 (0 DM)	0 (0 DM)
	1 (4 DM)	1 (4 DM)
	2 (8 DM)	2 (8 DM)
2 - 15 DM	4 (16 DM)	4 (16 DM)
3 - 20 DM	5 (20 DM)	5 (20 DM)
	6-62 (24-248 DM OR MORE)	6-62 (24-248 DM OR MORE)

6. The M.84A Speed is in 1 data mile per hour increments, and the J3.0C2 Speed is in 2 data mile per hour increments. The J3.0C2 Speed values 0-63 (0-126 data miles per hour) shall be translated to the equivalent M.84A Speed. The J3.0C2 Speed values 64-2046 (128-4092 data miles per hour) shall be translated to the M.84A Speed value 126 (126 data miles per hour). The J3.0C2 Speed value 2047 (No Statement) shall be translated to M.84A Speed value 127 (No Statement).

7. The FWDA Duration will be interpreted from the J3.0I Time Function, Minute, and Hour fields. Two J3.0 messages are required to report a FWDA. One message contains the time of activation and the other message contains the time of deactivation. FWDA Duration shall be forwarded after both J3.0 messages have been received. The FWDA Duration is determined by subtracting the Activation Time from the Deactivation Time (DT-AT). If both J3.0 messages are not received within 12 seconds, FWDA Duration shall be forwarded as value 31, 155 minutes.

FWDA Duration is reported in 5 minute increments with a maximum value of 155 minutes. Translate Link 16 DT-AT to the nearest Link 11/11B increment, rounding up.

APPENDIX C

TABLE C.5.2-M.4A-2. M.4A/M.84A Message Data Element Translation from the J3.0 Message (Sheet 6 of 6)

NOTES (Continued)

7. (Continued)

Link 11/11B	Link 16	
FWDA DURATION	HOUR	MINUTE
5 THROUGH 55	0	0-55
60	0	55-59
	1	0
65 THROUGH 115	1	1-55
120	1	55-59
	2	0
125 THROUGH 150	2	1-30
155	2	35
	2	36-59
	3-23	ANY

TABLE C.5.2-M.4A-3. M.4A/M.84A Message Data Element Translation from the J3.4 Message (Sheet 1 of 7)

Link 11/11B				Link 16			
MESSAGE	FIELD	VALUE	TRANSLATION REQUIRED	WORD	DATA ELEMENT	VALUE	NOTES
M.4A	LABEL	4	CR	J3.4I	LABEL, J-SERIES	3	
	TRACK NUMBER	AT	CR	J3.4I	TRACK NUMBER, REFERENCE	RX	G13
	IDENTITY	AT	CR	J3.4I	IDENTITY EXERCISE INDICATOR	RX RX	1
	DATA REPORT TYPE	AT	CR	J3.4I	DATA REPORT TYPE	RX	2
	NONREAL-TIME INDICATOR	AT	CR	J3.4C1	TIME FUNCTION, ASW	RX	3
	SCALE INDICATOR	AT	CR	J3.4E0	LATITUDE, 0.0051 MINUTE LONGITUDE, 0.0051 MINUTE	RX RX	4, G9
	SUB LABEL	0	CR	J3.4I	SUBLABEL, J-SERIES	4	
	X COORDINATE	AT	CR	J3.4E0	LATITUDE, 0.0051 MINUTE LONGITUDE, 0.0051 MINUTE	RX RX	G9
	Y COORDINATE	AT	CR	J3.4E0	LATITUDE, 0.0051 MINUTE LONGITUDE, 0.0051 MINUTE	RX RX	G9
M.84A	LABEL	8	CR	J3.4I	LABEL, J-SERIES SUBLABEL, J-SERIES	3 4	
	ASW POINT TYPE	0	None	NA	NA	NA	5
	CLASSIFICATION	AT	CR	J3.4I	CONFIDENCE LEVEL SUBSURFACE (MARITIME) PLATFORM	RX RX	6, 7
	COURSE/BEARING	AT	CR	J3.4E0	COURSE	RX	8
	CLASSIFICATION AMPLIFICATION	AT	CR	J3.4I	CONFIDENCE LEVEL SUBSURFACE (MARITIME) PLATFORM	RX RX	6, 7
	DEPTH	AT	CR	J3.4I J3.4C1	DATA REPORT TYPE DEPTH CONTACT DEPTH, 15 METERS	RX RX RX	9 9 G11
	DEPTH INDICATOR	AR	CR	J3.4I	DATA REPORT TYPE	RX	9

C-633

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-M.4A-3. M.4A/M.84A Message Data Element Translation from the J3.4 Message (Sheet 2 of 7)

Link 11/11B					Link 16		
MESSAGE	FIELD	TRANSLATION			DATA ELEMENT	VALUE	NOTES
		VALUE	REQUIRED	WORD			
M.84A (Cont'd)				J3.4C1	DEPTH CONTACT	RX	9
					DEPTH, 15 METERS	RX	G11
	SENSOR	AT	CR	J3.4C1	SENSOR	RX	10
	NOTACK DURATION	0	None	NA	NA	NA	
	NOTACK RADIUS	0	None	NA	NA	NA	
	COURSE/BEARING INDICATOR	AT	CR	J3.4E0	COURSE	RX	8
	SPEED	AT	CR	J3.4E0	SPEED, ASW	RX	11
	POSSIBLE SUBMARINE	AT	CR	J3.4I	CONFIDENCE LEVEL	RX	6

APPENDIX C

TABLE C.5.2-M.4A-3. M.4A/M.84A Message Data Element Translation from the J3.4 Message (Sheet 3 of 7)

NOTES

1. If J3.4 Exercise Indicator = 1, translate all identities to M.4A Identity = Friend. If J3.4 Exercise Indicator = 0, the M.4A Identity field is determined as follows:

Link 11/11B	Link 16
IDENTITY	IDENTITY
0 - NO STATEMENT/PENDING	0 - PENDING
1 - FRIEND	7 - UNDEFINED
2 - HOSTILE	3 - FRIEND
3 - UNKNOWN	4 - NEUTRAL
	6 - HOSTILE
	1 - UNKNOWN
	2 - ASSUMED FRIEND
	5 - SUSPECT

2. The Link 11/11B Data Report Type field will be determined as follows:

Link 11/11B	Link 16
DATA REPORT TYPE	DATA REPORT TYPE
0 - SUBSURFACE TRACK	0 - SUBSURFACE TRACK
1 - SURFACED SUBMARINE	2 - SNORKELING SUBMARINE
2 - DATUM	1 - SURFACED SUBMARINE
	4 - DATUM

3. The M.4A Nonreal-Time Indicator (NRT) is determined from the J3.4C1 Time Function, ASW field as follows:

Link 11/11B	Link 16
NONREAL-TIME INDICATOR	TIME FUNCTION, ASW
0 - NO STATEMENT	1 - TIME CONTACT FIRST ACQUIRED/ TIME DATUM ESTABLISHED
1 - NONREAL-TIME TRACK DATA	3 - TIME CONTACT LOST
	0 - NO STATEMENT
	2 - TIME OF CURRENT POSITIONAL DATA

4. The Scale Indicator in the M.4A is determined as follows:

- o SI=0 Tracks are reported in 31 1/4 yard increments up to 32 data miles.

APPENDIX C

TABLE C.5.2-M.4A-3. M.4A/M.84A Message Data Element Translation from the J3.4 Message (Sheet 4 of 7)

NOTES (Continued)

4. (Continued)

- o SI=1 Tracks are reported in 500 yard increments up to 512 data miles.

The FJU may forward all tracks with the Scale Indicator set to 1.

5. When Data Report Type in the M.4A equals 0-2, this field is Spare.

6. If the J3.4I Confidence Level is other than value 2-5, this M.84A field is Spare and shall be set to value 0. If J3.4I Confidence Level = 2-5, Possible Submarine is determined from Confidence Level as follows:

Link 11/11B	Link 16
POSSIBLE SUBMARINE	CONFIDENCE LEVEL
1 - POSSIBLE SUBMARINE 1	2 - POSSIBLE SUBMARINE LOW ONE
2 - POSSIBLE SUBMARINE 2	3 - POSSIBLE SUBMARINE LOW TWO
3 - POSSIBLE SUBMARINE 3	4 - POSSIBLE SUBMARINE HIGH THREE
4 - POSSIBLE SUBMARINE 4	5 - POSSIBLE SUBMARINE HIGH FOUR

7. The M.84A Classification and Classification Amplification fields are determined from the J3.4I Confidence Level and Subsurface (Maritime) Platform as follows:

Link 11/11B	Link 16
CLASSIFICATION	SUBSURFACE (MARITIME) PLATFORM
0	ALL EXCEPT 20
1	ALL EXCEPT 20
	0, 18, 19, 21-27, 30-32, 38-63
	1, 28, 29
	2-8, 35, 36
	9-17, 33, 34, 37

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.4A-3. M.4A/M.84A Message Data Element Translation from the J3.4 Message (Sheet 5 of 7)

NOTES (Continued)

7. (Continued)

<u>Link 11/11B</u>		<u>Link 16</u>	
<u>CLASSIFICATION</u>	<u>CLASSIFICATION AMPLIFICATION</u>	<u>CONFIDENCE LEVEL</u>	<u>SUBSURFACE (MARITIME) PLATFORM</u>
2	0	6	0, 18, 19, 21-27, 30-32, 38-63
	1		1, 28, 29
	2		2-8, 35, 36
	3		9-17, 33, 34, 37
3	0	7	0, 18, 19, 21-27, 30-32, 38-63
	1		1, 28, 29
	2		2-8, 35, 36
	3		9-17, 33, 34, 37
4	0	8	0-18, 24, 26, 28-63
	1		19
	3	9	ALL EXCEPT 20
	4	8	22
	5		21
	6		25
	7		27
6	0	ALL	23
			20

8. The M.84A Course/Bearing and Course/Bearing Indicator (CBI) fields are determined by the J3.4E0 Course field as follows:

<u>Link 11/11B</u>		<u>Link 16</u>
<u>COURSE/BEARING INDICATOR</u>	<u>COURSE/BEARING</u>	<u>COURSE</u>
0	0 (NOT INTERPRETED)	360-510 - ILLEGAL
1	0-255 - 0 THROUGH 358 152/256 DEGREES	511 - NO STATEMENT 0-359 - 0 THROUGH 359 DEGREES

Link 16 Course is in 1 degree increments, and Link 11/11B Course/Bearing is in 360/256 degree increments. Translate Link 16 to the nearest Link 11/11B increment (.5 rounded up).

APPENDIX C

TABLE C.5.2-M.4A-3. M.4A/M.84A Message Data Element Translation from the J3.4 Message (Sheet 6 of 7)

NOTES (Continued)

9. When J3.4I Data Report Type = 0 or 1, and information is reported in the J3.4C1 Depth Contact, the information shall be forwarded in the M.84A Depth field with the M.84A Depth Indicator (DI) field set to one. The Depth field will be determined as follows:

Link 11/11B	Link 16
DEPTH	DEPTH CONTACT
0 - UNKNOWN/NO STATEMENT	0 - NO STATEMENT
	6 - UNKNOWN
	8-15 - UNDEFINED
2 - ESTIMATED SHALLOW	1 - ESTIMATED SHALLOW
3 - PERISCOPE DEPTH	7 - PERISCOPE DEPTH
4 - ABOVE FIRST LAYER	2 - ABOVE LAYER
8 - BELOW BOTTOM LAYER	3 - BELOW LAYER
9 - ESTIMATED DEEP	4 - ESTIMATED DEEP
10 - BOTTOMED	5 - BOTTOMED

When J3.4I Data Report Type =2 (Snorkeling Submarine), the M.84A Depth Indicator and Depth fields shall be set to value 1 (Snorkeling).

When other than No Statement is reported in the J3.4C1 Depth, 15 meters field, set Depth Indicator to 0 and translate Depth in accordance with General Note 11. J3.4C1 Depth greater than 63 shall be translated to M.84A Depth = 63.

If neither J3.4C1 Depth Contact = 1-5 nor Depth, 15 Meters = 0-126, the M.84A Depth Indicator shall be set to value 1 and M.84A Depth shall be set to value 0.

If both J3.4C1 Depth Contact = 1-5 and J3.4C1 Depth, 15 Meters = 0-126, an M.4A/M.84A(DI=0) message sequence shall be transmitted, followed by an M.4A/M.84A(DI=1) message sequence.

10. The Sensor field will be determined as follows:

APPENDIX C

TABLE C.5.2-M.4A-3. M.4A/M.84A Message Data Element Translation from the J3.4 Message (Sheet 7 of 7)

NOTES (Continued)

10. (Continued)

Link 11/11B	Link 16
SENSOR	SENSOR
0 - NO STATEMENT	0 - NO STATEMENT/UNKNOWN
	28-31 - UNDEFINED
1 - ACTIVE SONAR	1 - ACTIVE SONAR
2 - PASSIVE SONAR	2 - PASSIVE SONAR
5 - SHIP SONAR (VDS AND HULL MOUNTED)	27 - SHIP SONAR
10 - RADAR	7 - RADAR
11 - INTELLIGENCE	20 - INTELLIGENCE
12 - ES	8 - ES
13 - MAD	5 - MAD
14 - LOFAR (AREA)	11 - LOFAR
17 - DIFAR	12 - DIFAR
18 - ACTIVE SONOBUOY (RANGE AND BEARING)	4 - ACTIVE SONOBUOY
20 - PASSIVE SONOBUOY	3 - PASSIVE SONOBUOY
21 - DIRECT PATH	13 - DIRECT PATH
22 - BOTTOM BOUNCE	14 - BOTTOM BOUNCE
23 - CONVERGENCE ZONE 1	15 - CONVERGENCE ZONE 1
24 - CONVERGENCE ZONE 2	16 - CONVERGENCE ZONE 2
25 - CONVERGENCE ZONE 3	17 - CONVERGENCE ZONE 3
26 - LLLTV	18 - LLLTV
27 - VISUAL	6 - VISUAL
28 - DESIGNATED FIX	21 - DESIGNATED FIX
29 - UNDERWATER TELEPHONE [UWT]	19 - UNDERWATER TELEPHONE
30 - TOWED ARRAY	9 - TAS/TAC TAS
31 - INFRARED DETECTION SYSTEM	10 - IRDS
32 - PASSIVE DIRECTIONAL SONOBUOY	23 - PASSIVE DIRECTIONAL SONOBUOY
58 - PASSIVE SOURCE (CPA)	22 - PASSIVE SOURCE (CPA)
61 - DICASS	24 - DICASS
62 - SOSUS	25 - SOSUS
63 - FLIR	26 - FLIR

11. The M.84A Speed is in 1 data mile per hour increments, and the J3.4E0 Speed is in 0.5 data mile per hour increments. The J3.4E0 Speed values 0-252 (0-126 data miles per hour) shall be translated to the equivalent M.84A Speed, with 0.5 data mile per hour increments arbitrarily rounded to the higher data mile. The J3.4E0 Speed values 253-510 (126.5-255 data miles per hour) shall be translated to the M.84A Speed value 126 (126 data miles per hour). The J3.4E0 Speed value 511 (No Statement) shall be translated to M.84A Speed value 127 (No Statement).

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-M.4B-1. M.4B Message Data Element Translation from the J3.0 Message (Sheet 1 of 2)

Link 11/11B					Link 16		
MESSAGE	FIELD	TRANSLATION			DATA ELEMENT	VALUE	NOTES
M.4B	LABEL	VALUE	REQUIRED	WORD	LABEL, J-SERIES	3	
		4	CR	J3.0I			
	TRACK NUMBER	AT	CR	J3.0I	TRACK NUMBER, REFERENCE	RX	G13
	MISSION	0	None	NA	NA	NA	
	SUB LABEL	1	CR	J3.0I	SUBLABEL, J-SERIES	0	
	MINUTES	AT	CR	J3.0I	MINUTE	RX	1
	HOURS	AT	CR	J3.0I	HOUR	RX	1
	TIME SWITCH	AT	CR	J3.0I	TIME FUNCTION	RX	1
	DATUM ERROR	0	None	NA	NA	NA	
	MISSILE CAPABILITY	0	None	NA	NA	NA	

APPENDIX C

TABLE C.5.2-M.4B-1. M.4B Message Data Element Translation from the J3.0 Message (Sheet 2 of 2)

NOTES

1. If Point Amplification = 6, 9, or 10 and Point Type = 7 and Time Function = 2 (Deactivation Time), then NOTACK Duration or Time Remaining shall be forwarded in an M.84A or M.84C message (see tables C.5.2-M.4A-2 and C.5.2-M.4C). Otherwise, time in the J3.0 message shall be translated into the M.4B in the Hours and Minutes fields. The M.4B Time Switch shall be determined from the J3.0I Time Function field as follows:

Link 11TIME SWITCH

0 - NO STATEMENT

1 - GMT OF ACQUISITION/
OBSERVATION/ ESTABLISHMENT/
COMMENCEMENTLink 16TIME FUNCTION

0 - NO STATEMENT

1 - ACTIVATION TIME

5 - TIME POINT ESTABLISHED

TABLE C.5.2-M.4B-2. M.4B Message Data Element Translation from the J3.4 Message (Sheet 1 of 3)

Link 11/11B					Link 16		
<u>MESSAGE</u>	<u>FIELD</u>	<u>TRANSLATION</u>			<u>DATA ELEMENT</u>	<u>VALUE</u>	<u>NOTES</u>
M.4B	<u>LABEL</u>	<u>VALUE</u>	<u>REQUIRED</u>	<u>WORD</u>	<u>LABEL, J-SERIES</u>	<u>3</u>	
	TRACK NUMBER	AT	CR	J3.4I	TRACK NUMBER, REFERENCE	RX	G13
	MISSION	AT	CR	J3.4I	SUBSURFACE (MARITIME) PLATFORM ACTIVITY	RX	1
	SUB LABEL	1	CR	J3.4I	SUBLABEL, J-SERIES	4	
	MINUTES	RX	=	J3.4C1	MINUTE	RX	
	HOURS	RX	=	J3.4C1	HOUR	RX	
	TIME SWITCH	AT	CR	J3.4C1	TIME FUNCTION, ASW	RX	2
	DATUM ERROR	RX	=	J3.4C2	DATUM ERROR	RX	3
	MISSILE CAPABILITY	AT	CR	J3.4I	SUBSURFACE (MARITIME) PLATFORM LAUNCH CAPABILITY	RX	4

APPENDIX C

TABLE C.5.2-M.4B-2. M.4B Message Data Element Translation from the J3.4
Message (Sheet 2 of 3)

NOTES

1. The J3.4I Subsurface (Maritime) Platform Activity will be translated to the M.4B Mission field as follows:

Link 11	Link 16
MISSION	SUBSURFACE (MARITIME) PLATFORM ACTIVITY
0 - NO STATEMENT	0 - NO STATEMENT
	2 - OVER THE HORIZON TARGETING (OHT)
	3 - TRAINING
	4 - DIVING
	6 - ELECTRONIC WARFARE (EW)
	7 - SURVEILLANCE
	12 - SPECIAL WEAPONS ATTACK
	13 - SURFACING
	14 - AMPHIBIOUS WARFARE
	15 - INTELLIGENCE COLLECTING
	16 - PATROL
	17 - TRANSPORT
	19 - SHADOWING/INTERVENING
	20 - BOTTOMING
	22 - STRIKE WARFARE
	24 - SNORKELING
	25 - CONVENTIONAL ATTACK
	26 - MINE COUNTERMEASURES
	27 - MINE WARFARE
	28 - MARKING
	29 - NONCOMBATANT OPERATIONS
	31 - VIDEO DATA LINKING (TARGETING)
	32-49 - UNDEFINED
	50 - RETURN TO BASE (RTB)
	51-114 - UNDEFINED
	115-126 - SUBSURFACE (MARITIME) ACTIVITY 1 THROUGH 12
	127 - RESET TO NO STATEMENT
1 - ANTISHIPPING	5 - ANTISURFACE WARFARE
2 - ANTISUBMARINE	18 - ANTISUBMARINE WARFARE (ASW)
3 - RECONNAISSANCE	1 - RECONNAISSANCE
4 - MINE LAYING	10 - MINELAYING
5 - TRANSITING	11 - TRANSITING
6 - SPECIAL/SAR	8 - SEARCH AND RESCUE (SAR)
	21 - SPECIAL WARFARE
	23 - CLANDESTINE OPERATIONS
7 - ESCORT	9 - ESCORTING
	30 - DIRECT SUPPORT

APPENDIX C

TABLE C.5.2-M.4B-2. M.4B Message Data Element Translation from the J3.4 Message (Sheet 3 of 3)

NOTES (Continued)

2. The M.4B Time Switch is translated from the J3.4C1 Time Function, ASW field as follows:

Link 11	Link 16
TIME SWITCH	TIME FUNCTION, ASW
0 - NO STATEMENT	0 - NO STATEMENT
1 - GMT OF ACQUISITION/ OBSERVATION/ ESTABLISHMENT/ COMMENCEMENT	1 - TIME CONTACT FIRST ACQUIRED/ TIME DATUM ESTABLISHED
	2 - TIME OF CURRENT POSITIONAL DATA
	2 - TIME OF CURRENT POSITIONAL DATA
3 - GMT OF TIME LOST	3 - TIME CONTACT LOST

3. Datum Error is used in the M.4B message only for the M.4A Data Report Type value 2. For all other Data Report Type values this field is Spare and shall be set to zero.

4. The M.4B Missile Capability is determined from J3.4I Subsurface (Maritime) Platform and Launch Capability as follows:

Link 11/11B	Link 16	
MISSILE CAPABILITY	LAUNCH CAPABILITY	SUBSURFACE (MARITIME) PLATFORM
0 - NO STATEMENT	0 - NO STATEMENT	ALL
	1 or 2	ALL EXCEPT 5 or 12 or 29
1 - BALLISTIC SUBMERGED	1 - MAY LAUNCH MISSILE WHILE SUBMERGED	5 - DIESEL ELECTRIC BALLISTIC MISSILE SUBMARINE
		12 - NUCLEAR BALLISTIC MISSILE SUBMARINE
2 - BALLISTIC SURFACED	2 - MUST BE SURFACED TO LAUNCH MISSILE	5 or 12
3 - CRUISE SUBMERGED	1 - MAY LAUNCH MISSILE WHILE SUBMERGED	29 - CRUISE MISSILE LAUNCHER
4 - CRUISE SURFACED	2 - MUST BE SURFACED TO LAUNCH MISSILE	29 - CRUISE MISSILE LAUNCHER

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-M.4B-3. M.4B Message Data Element Translation from the J5.4 Message

Link 11/11B					Link 16		
<u>MESSAGE</u> M.4B	<u>FIELD</u> LABEL	<u>TRANSLATION</u>			<u>DATA ELEMENT</u> LABEL, J-SERIES	<u>VALUE</u> 5	<u>NOTES</u>
		<u>VALUE</u> 4	<u>REQUIRED</u> CR	<u>WORD</u> J5.4I			
	TRACK NUMBER	AT	CR	J5.4I	TRACK NUMBER, REFERENCE	RX	G13
	MISSION	0	None	NA	NA	NA	
	SUB LABEL	1	CR	J5.4I	SUBLABEL, J-SERIES	4	
	MINUTES	RX	=	J5.4I	MINUTE	RX	
	HOURS	RX	=	J5.4I	HOURL	RX	
	TIME SWITCH	1	None	NA	NA	NA	
	DATUM ERROR	0	None	NA	NA	NA	
	MISSILE CAPABILITY	0	None	NA	NA	NA	

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-M.4C. M.4C/M.84C Message Data Element Translation from Link 16 (Sheet 1 of 3)

MESSAGE	FIELD LABEL	Link 11/11B			Link 16		
		VALUE 4	TRANSLATION REQUIRED CR	WORD J3.0I	DATA ELEMENT LABEL, J-SERIES	VALUE 3	NOTES
M.4C	TRACK NUMBER	AT	CR	J3.0I	TRACK NUMBER, REFERENCE	RX	G13
	IDENTITY	0	None	NA	NA	NA	
	SWITCH	AT	CR	J3.0I	POINT TYPE POINT AMPLIFICATION	7 9 or 10	1
	CONTACT STATUS	RX	=	J3.0C3	HOLDING CONTACT	RX	
	SCALE INDICATOR	AR	CR	J3.0E0	LATITUDE, 0.0103 MINUTE LONGITUDE, 0.0103 MINUTE	RX RX	2
	SUB LABEL	2	CR	J3.0I	SUBLABEL, J-SERIES	0	
	X COORDINATE	AT	CR	J3.0E0	LATITUDE, 0.0103 MINUTE LONGITUDE, 0.0103 MINUTE	RX RX	G9
	Y COORDINATE	AT	CR	J3.0E0	LATITUDE, 0.0103 MINUTE LONGITUDE, 0.0103 MINUTE	RX RX	G9
	LABEL	8	CR	J3.0I	LABEL, J-SERIES SUBLABEL, J-SERIES	3 0	
	CHANNEL AMPLIFY	RX	=	J3.0C3	CHANNEL NUMBER, SONOBUOY RF	RX	3
M.84C	SONOBUOY SWITCH	AT	CR	J3.0C3 J3.0C4	SONOBUOY TYPE SONOBUOY TYPE, 1	RX RX	4
	TYPE, 1	AT	CR	J3.0C4	SONOBUOY TYPE, 1	RX	4
	TYPE	AT	CR	J3.0C3	SONOBUOY TYPE	RX	4
	TIME REMAINING	AT	CR	J3.0I	TIME FUNCTION MINUTE HOUR	RX RX RX	5
	TRANSDUCER DEPTH	RX	=	J3.0C3	DEPTH INDICATOR (SONOBUOY)	RX	
	CHANNEL NUMBER	AT	CR	J3.0C3	CHANNEL NUMBER, SONOBUOY RF	RX	3
	CALIBRATION STATUS	0	None	NA	NA	NA	
	TIME LOST	0	None	NA	NA	NA	

C-649

APPENDIX C

MIL-STD-6016B

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.4C. M.4C/M.84C Message Data Element Translation from Link 16
(Sheet 2 of 3)

NOTES

1. The M.4C Switch is determined from the J3.0I Point Amplification field when Point Type = 7 as follows:

Link 11	Link 16
SWITCH	POINT AMPLIFICATION
2 - SONOBUOY POSITION	9 - SONOBUOY POSITION
3 - REFERENCE SONOBUOY POSITION	10 - SONOBUOY PATTERN REFERENCE POSITION

2. The Scale Indicator field in the M.4C message is determined as follows:

- o SI=0 Tracks are reported in 31 1/4 yard increments up to 32 data miles.
- o SI=1 Tracks are reported in 500 yard increments up to 511 3/4 data miles.

The FJU may forward all tracks with Scale Indicator set to 1.

3. If Channel Number, Sonobuoy RF = 0-31, M.84C Channel Number shall equate to Channel Number, Sonobuoy RF. Otherwise, M.84C Channel Number shall be set to value 0. The M.84C Channel Amplify shall equate to Channel Number, Sonobuoy RF.

4. The Type, Type, 1 and Sonobuoy Switch fields are determined from the J3.0C3 Sonobuoy Type and/or J3.0C4 Sonobuoy Type, 1 fields as follows:

Link 11/11B	Link 16
SONOBUOY SWITCH	SONOBUOY TYPE
0	0 - NO STATEMENT
	8 - DISUSED
	9 - DISUSED
	11 - DISUSED
1 - BT	1 - BT
2 - LOFAR	2 - LOFAR
3 - RO	3 - RO
4 - DIFAR	4 - DIFAR

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.4C. M.4C/M.84C Message Data Element Translation from Link 16
(Sheet 3 of 3)

NOTES (Continued)

4. (Continued)

Link 11/11B		Link 16
SONOBUOY SWITCH	TYPE	SONOBUOY TYPE
	5 - VLA	5 - VLA
	6 - CAMBS	6 - CAMBS
	7 - ADAR	14 - ADAR
	8 - NUAMP	15 - NUAMP
	9 - BARRA	7 - BARRA
	12 - VLAD	10 - VLAD
	14 - WIDE BAND LOFAR	12 - WIDE BAND LOFAR
	15 - DICASS	13 - DICASS
SONOBUOY SWITCH	TYPE, 1	SONOBUOY TYPE, 1
1	0 - NO STATEMENT	0 - NO STATEMENT
		7-15 - UNDEFINED
	1 - HIDAR	1 - HIDAR
	2 - SSQ110	2 - SSQ110
	3 - CAMBS6	3 - CAMBS6
	4 - ALFEA	4 - ALFEA
	5 - SSQ911	5 - SSQ911
	6 - SSQ981D	6 - SSQ981D

5. If Time Function is other than value 2 (Time Remaining) shall be set to value 15 (No Statement). When Time Function = 2 (Deactivation Time), the FJU shall subtract the current time from the J3.0I Hour and Minute, to the nearest minute, (the FJU must account for date change) and then forward the result as M.84C Time Remaining as follows:

Link 11/11B	Link 16	
TIME REMAINING	MINUTE	HOUR
0 - 0 MINUTES	0	0
1 - < 2 MINUTES		1
2 - < 5 MINUTES		2-4
3 - < 10 MINUTES		5-9
4 - < 15 MINUTES		10-14
5 - < 20 MINUTES		15-19
6 - < 25 MINUTES		20-24
7 - < 30 MINUTES		25-29
8 - < 1 HOUR		30-59
9 - < 2 HOURS	1	0-59
10 - < 3 HOURS	2	0-59
11 - < 4 HOURS	3	0-59
12 - < 5 HOURS	4	0-59
13 - < 10 HOURS	5-9	0-59
14 - = OR > 10 HOURS	10-23	0-59

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-M.4D. M.4D/M.84D Message Data Element Translation from Link 16 (Sheet 1 of 8)

MESSAGE	Link 11/11B			Link 16		
	FIELD	VALUE	TRANSLATION	DATA ELEMENT	VALUE	NOTES
M.4D	LABEL	4	REQUIRED	LABEL, J-SERIES	5	
	TRACK NUMBER	AT	CR	TRACK NUMBER, REFERENCE	RX	G13
	IDENTITY	AT	CR	IDENTITY EXERCISE INDICATOR	RX RX	1
	BEARING REPORT TYPE	RX	=	BEARING REPORT TYPE	RX	
	B-FRAME SWITCH	AT	CR	LATITUDE, 0.0051 MINUTE LONGITUDE, 0.0051 MINUTE	RX RX	2, G9
	SUB LABEL	3	CR	SUBLABEL, J-SERIES	4	
	X COORDINATE	AT	CR	LATITUDE, 0.0051 MINUTE LONGITUDE, 0.0051 MINUTE	RX RX	2, G9
	Y COORDINATE	AT	CR	LATITUDE, 0.0051 MINUTE LONGITUDE, 0.0051 MINUTE	RX RX	2, G9
	SOURCE ACOUSTIC FREQUENCY	RX	=	FREQUENCY, SOURCE ACOUSTIC	RX	
	BROADBAND	RX	=	BROADBAND	RX	
	AUDIO	RX	=	AUDIO	RX	
	SOUND PROPAGATION PATH	AT	CR	SOUND PROPAGATION PATH	RX	3
	DOPPLER	RX	=	DOPPLER	RX	
	ABOVE/BELOW LAYER	RX	=	DEPTH, ABOVE/BELOW LAYER (SENSOR)	RX	
	TN ORIGINATOR	AT	CR	TRACK NUMBER, ORIGIN	RX	G13
	SENSOR DEPTH	AT	CR	DEPTH, SENSOR	RX	5
M.84D	LABEL	8	CR	LABEL, J-SERIES	5	
	SENSOR	RX	=	SENSOR INDICATOR	RX	
	BEARING DRIFT	RX	=	BEARING DRIFT	RX	

C-653

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-M.4D. M.4D/M.84D Message Data Element Translation from Link 16 (Sheet 2 of 8)

MESSAGE M.84D (Cont'd)	Link 11/11B		TRANSLATION			Link 16	
	FIELD	VALUE	REQUIRED	WORD	DATA ELEMENT	VALUE	NOTES
	BEARING ACCURACY	AT	CR	J5.4C1	BEARING ACCURACY, ASW	RX	6
	CONTACT DEPTH	AT	CR	J5.4C2	DEPTH CONTACT	RX	7
	CLASSIFICATION	AT	CR	J5.4I	CONFIDENCE LEVEL	RX	8,9
	CLASSIFICATION AMPLIFICATION	AT	CR	J5.4I	CONFIDENCE LEVEL SUBSURFACE (MARITIME) PLATFORM	RX RX	9
	SWITCH	AR	None	NA	NA	NA	
	BEARING 1	RX	=	J5.4E0	BEARING 1, ASW	RX	
	BEARING INDICATOR	AT	CR	J5.4E0	BEARING REPORT TYPE	RX	10
	RANGE	RX	=	J5.4C1	RANGE	RX	
	RANGE ACCURACY	RX	=	J5.4C1	RANGE ACCURACY, ASW	RX	
	LABEL	8	CR	J5.4I	LABEL, J-SERIES	5	
	FIRST ASSOCIATED ACOUSTIC FREQUENCY	RX	=	J5.4C1	FREQUENCY, ASSOCIATED ACOUSTIC 1	RX	
	SWITCH	AR	None	NA	NA	NA	
	BEARING 2	RX	=	J5.4C1	BEARING 2, ASW	RX	
	BEARING INDICATOR	0	None	NA	NA	NA	
	SECOND ASSOCIATED ACOUSTIC FREQUENCY	RX	=	J5.4C1	FREQUENCY, ASSOCIATED ACOUSTIC 2	RX	

C-654

APPENDIX C

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.4D. M.4D/M.84D Message Data Element Translation from Link 16
(Sheet 3 of 8)

NOTES

1. If J5.4 Exercise Indicator = 1, translate to M.4D Identity = Friend. If J5.4 Exercise Indicator = 0, the M.4D Identity field is determined as follows:

Link 11	Link 16
IDENTITY	IDENTITY
0 - NO STATEMENT/PENDING	0 - PENDING
1 - FRIEND	7 - UNDEFINED
2 - HOSTILE	3 - FRIEND
3 - UNKNOWN	4 - NEUTRAL
	6 - HOSTILE
	1 - UNKNOWN
	2 - ASSUMED FRIEND
	5 - SUSPECT

2. The M.4D B-Frame Switch determines whether the M.4D will contain the Track Number Originator and Sensor Depth (Switch = 3); or Source Acoustic Frequency, Broadband, Audio, Sound Propagation Path, Doppler and Above/Below Layer (Switch = 2); or position (X Coordinate, Y Coordinate) (Switch = 0 or 1). When position is reported, the B-Frame Switch is interpreted as follows:

- o BSW = 0 Tracks are reported in 31 1/4 yd. increments up to 32 data miles.
- o BSW = 1 Tracks are reported in 500 yd. increments up to 511 3/4 data miles.

When position is forwarded, the FJU may forward all tracks with the BSW set to one.

3. The M.4D Sound Propagation Path field is determined as follows:

APPENDIX C

TABLE C.5.2-M.4D. M.4D/M.84D Message Data Element Translation from Link 16
(Sheet 4 of 8)

NOTES (Continued)

3. (Continued)

Link 11	Link 16
SOUND PROPAGATION PATH	SOUND PROPAGATION PATH
0 - NO STATEMENT	0 - NO STATEMENT
	8 - MULTIPATH
	9-15 - UNDEFINED
1 - UNKNOWN	1 - UNKNOWN
2 - DIRECT PATH	2 - DIRECT PATH
3 - BOTTOM BOUNCE	3 - BOTTOM BOUNCE
4 - CONVERGENCE ZONE 1	4 - CONVERGENCE ZONE 1
5 - CONVERGENCE ZONE 2	5 - CONVERGENCE ZONE 2
6 - CONVERGENCE ZONE 3 OR BEYOND	6 - CONVERGENCE ZONE 3 OR BEYOND
7 - CONVERGENCE ZONE UNSPECIFIED	7 - CONVERGENCE ZONE UNSPECIFIED

4. Not used.

5. When J5.4C2 Depth, Sensor is an even value less than or equal to 40 (600 meters), M.4D Sensor Depth shall be set to the value whose meaning is equal to the received meaning. When J5.4C2 Depth, Sensor is an odd value less than or equal to 39 (585 meters), then the M.4D Sensor Depth shall be set to the data item whose meaning is 50 feet greater than the received meaning. For the J5.4C2 Depth, Sensor values greater than or equal to 41 (615 meters), the M.4D Sensor Depth shall be forwarded as value 20 (2000 feet), except for the J5.4C2 Depth, Sensor value 127 (No Statement) which shall be forwarded as value 31 (No Statement) in the M.4D Sensor Depth field.

6. The M.84D Bearing Accuracy field is determined as follows:

Link 11	Link 16
BEARING ACCURACY	BEARING ACCURACY, ASW (NO STATEMENT)
0(NO STATEMENT)	0(NO STATEMENT)
	9-15(UNDEFINED)
1(< = 2 DEGREES)	1(+ OR - 2 DEGREES)
2(< = 5 DEGREES)	2(+ OR - 5 DEGREES)
3(< = 10 DEGREES)	3(+ OR - 10 DEGREES)
4(< = 15 DEGREES)	4(+ OR - 15 DEGREES)
5(< = 20 DEGREES)	5(+ OR - 20 DEGREES)
6(< = 30 DEGREES)	6(+ OR - 30 DEGREES)
7(OVER 30 DEGREES)	7(+ OR - 45 DEGREES)
	8(OVER 45 DEGREES)

APPENDIX C

TABLE C.5.2-M.4D. M.4D/M.84D Message Data Element Translation from Link 16
(Sheet 5 of 8)

NOTES (Continued)

7. The M.84D Contact Depth field is determined from the J5.4C2 Depth Contact field as follows:

Link 11	Link 16
CONTACT DEPTH	DEPTH CONTACT
0 - UNKNOWN/NO STATEMENT	0 - NO STATEMENT
	6 - UNKNOWN
	8-15 - UNDEFINED
1 - ESTIMATED SHALLOW	1 - ESTIMATED SHALLOW
2 - ABOVE LAYER	2 - ABOVE LAYER
3 - BELOW LAYER	3 - BELOW LAYER
4 - ESTIMATED DEEP	4 - ESTIMATED DEEP
6 - PERISCOPE DEPTH	7 - PERISCOPE DEPTH
5 - BOTTOMED	5 - BOTTOMED

8. The M.84D Classification field is determined from the J5.4I Confidence Level field as follows:

Link 11/11B	Link 16
CLASSIFICATION	CONFIDENCE LEVEL
0 - NO STATEMENT/ UNCLASSIFIED	0 - NO STATEMENT
	1 - UNCLASSIFIED
1 - POSSUB 1	2 - POSSIBLE SUBMARINE LOW ONE
2 - POSSUB 2	3 - POSSIBLE SUBMARINE LOW TWO
3 - POSSUB 3	4 - POSSIBLE SUBMARINE HIGH THREE
4 - POSSUB 4	5 - POSSIBLE SUBMARINE HIGH FOUR
5 - PROBABLE SUBMARINE	6 - PROBABLE SUBMARINE
7 - CERTAIN SUBMARINE	7 - CERTAIN SUBMARINE
8 - NONSUBMARINE	8 - NON SUBMARINE
	9 - SURFACE VESSEL

9. The M.4D Classification and Classification Amplification fields are determined from the J5.4I Confidence Level and Subsurface (Maritime) Platform fields as follows:

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.4D. M.4D/M.84D Message Data Element Translation from Link 16
(Sheet 6 of 8)

NOTES (Continued)

9. (Continued)

Link 11		Link 16	
CLASSIFICATION	CLASSIFICATION AMPLIFICATION	CONFIDENCE LEVEL	SUBSURFACE (MARITIME) PLATFORM
0	0	0 or 1	ALL
1	0	2	0, 18-27, 30-32, 38-63
	1		1, 28, 29, 49
	2		9-12, 37
	3		2-5, 35, 36
	4		13
	5		14
	6		15
	7		16
	8		17
	9		6
	10		7
	11		8
	12		33
	13		34
2	0	3	0, 18-27, 30-32, 38-63
	1		1, 28, 29, 49
	2		9-12, 37
	3		2-5, 35
	4		13
	5		14
	6		15
	7		16
	8		17
	9		6
	10		7
	11		8
	12		33
	13		34
3	0	4	0, 18-27, 30-32, 38-63
	1		1, 28, 29, 49
	2		9-12, 37
	3		2-5, 35, 36
	4		13
	5		14
	6		15
	7		16
	8		17
	9		6
	10		7

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.4D. M.4D/M.84D Message Data Element Translation from Link 16
(Sheet 7 of 8)

NOTES (Continued)

9. (Continued)

<u>Link 11</u>		<u>Link 16</u>	
<u>CLASSIFICATION</u>	<u>CLASSIFICATION AMPLIFICATION</u>	<u>CONFIDENCE LEVEL</u>	<u>SUBSURFACE (MARITIME) PLATFORM</u>
4	11	5	8
	12		33
	13		34
	0		0, 18-27, 30-32, 38-63
	1		1, 28, 29, 49
	2		9-12, 37
	3		2-5, 35, 36
	4		13
	5		14
	6		15
	7		16
	8		17
	9		6
5	10	6	7
	11		8
	12		33
	13		34
	0		0, 18-27, 30-32, 38-63
	1		1, 28, 29, 49
	2		9-12, 37
	3		2-5, 35, 36
	4		13
	5		14
	6		15
	7		16
	8		17
7	9	7	6
	10		7
	11		8
	12		33
	13		34
	0		0, 18-27, 30-32, 38-63
	1		1, 28, 29, 49
	2		9-12, 37
	3		2-5, 35, 36
	4		13
	5		14
	6		15
	7		16
	8		17

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.4D. M.4D/M.84D Message Data Element Translation from Link 16
(Sheet 8 of 8)

NOTES (Continued)

9. (Continued)

<u>Link 11</u>		<u>Link 16</u>	
<u>CLASSIFICATION</u>	<u>CLASSIFICATION AMPLIFICATION</u>	<u>CONFIDENCE LEVEL</u>	<u>SUBSURFACE (MARITIME) PLATFORM</u>
	9		6
	10		7
	11		8
	12		33
	13		34
8	0	8	0-18, 21, 23, 24, 26-63
	1		19
	2	9	ALL
	3	8	20
	5		22
			25

10. If the J5.4 Bearing Report Type field is set to value 3, set the M.84D Bearing Indicator field to value 1. Otherwise, set the Bearing Indicator field to value 0.

TABLE C.5.2-M.5-1. M.5/M.85 Message Data Element Translation from the J2.0 Message (Sheet 1 of 2)

MESSAGE	Link 11/11B			Link 16		
	FIELD	VALUE	TRANSLATION	DATA ELEMENT	VALUE	NOTES
M.5	LABEL	5	REQUIRED	WORD	2	
			CR	J2.0I	0	
	TRACK NUMBER/ADDRESS	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX G2, G12
	SCALE INDICATOR	AR	CR	J2.0E0	LATITUDE, 0.0103 MINUTE LONGITUDE, 0.0103 MINUTE	RX RX 1
	POINT	13	None	NA	NA	NA
	POINT AMPLIFY	AT	CR	J2.0I	SITE	RX 5
	X COORDINATE	AT	CR	J2.0E0	LATITUDE, 0.0103 MINUTE LONGITUDE, 0.0103 MINUTE	RX RX G9
	Y COORDINATE	AT	CR	J2.0E0	LATITUDE, 0.0103 MINUTE LONGITUDE, 0.0103 MINUTE	RX RX G9
M.85	LABEL	8	CR	J2.0I	LABEL, J-SERIES SUBLABEL, J-SERIES	2 0
	RELATED TRACK NUMBER/TRACK NUMBER	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX 2, G2, G12
	SWITCH	AR	None	NA	NA	NA 3
	REFERENCE	0	None	NA	NA	NA 2
	X DOT	AT	CR	J2.0E0	COURSE SPEED	RX RX 3, G7
	Y DOT	AT	CR	J2.0E0	COURSE SPEED	RX RX 3, G7
	MINUTES	63	None	NA	NA	NA 4
	HOURS	31	None	NA	NA	NA 4
	TIME SWITCH	0	None	NA	NA	NA 4
	HEIGHT/DEPTH	AT	CR	J2.0I	ALTITUDE, 25 FT	RX 3, G10
	HEIGHT/DEPTH SWITCH	0	None	NA	NA	NA

C-661

APPENDIX C

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.5-1. M.5/M.85 Message Data Element Translation from the J2.0 Message (Sheet 2 of 2)

NOTES

1. The FJU may forward all positions with Scale Indicator = 0.
2. The Related TN/TN field contains the same TN as contained in the immediately preceding M.5 message. The Reference (REF) field shall be set to 0 to indicate that the track number in the M.5 message and the M.85 message are identical. Slaved Points that are indicated by REF = 1 or 2 are not used in this translation.
3. If necessary to report X Dot, Y Dot, and Height, a second M.5 message identical to the first will be transmitted, followed by a second M.85 message in which the alternate parameters are included. The Switch is set to 0 when Course and Speed are reported as other than No Statement. The Switch is set to 1 if Altitude, 25 Ft is other than No Statement.
4. Time other than No Statement in this message is not appropriate since this is a real-time report of a PU/RU's position.
5. Point Amplification is determined from Site as follows:

Link 11/11BPOINT AMPLIFY

0 - NO STATEMENT

1 - FPU/FRU

2 - PU

3 - RU

Link 16SITE

0 - NO STATEMENT

4-7 - UNDEFINED

1 - FPU/FRU

2 - PU

3 - RU

TABLE C.5.2-M.5-2. M.5/M.85 Message Data Element Translation from the J2.2 Message (Sheet 1 of 3)

MESSAGE	Link 11/11B				Link 16		
	FIELD LABEL	VALUE 5	TRANSLATION		DATA ELEMENT LABEL, J-SERIES SUBLABEL, J-SERIES	VALUE 2 2	NOTES
			REQUIRED	WORD J2.2I			
M.5	TRACK NUMBER/ADDRESS	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	G2, G12
	SCALE INDICATOR	AR	CR	J2.2E0	LATITUDE, 0.0013 MINUTE LONGITUDE, 0.0013 MINUTE	RX RX	1
	POINT	13	CR	J2.2I	COMMAND AND CONTROL INDICATOR	1	2
	POINT AMPLIFY	4	CR	J2.2I	COMMAND AND CONTROL INDICATOR	1	
	X COORDINATE	AT	CR	J2.2E0	LATITUDE, 0.0013 MINUTE LONGITUDE, 0.0013 MINUTE	RX RX	G9
	Y COORDINATE	AT	CR	J2.2E0	LATITUDE, 0.0013 MINUTE LONGITUDE, 0.0013 MINUTE	RX RX	G9
M.85	LABEL	8	CR	J2.2I	LABEL, J-SERIES SUBLABEL, J-SERIES	2 2	
	RELATED TRACK NUMBER/TRACK NUMBER	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	3, G2, G12
	SWITCH	AR	None	NA	NA	NA	4
	REFERENCE	0	None	NA	NA	NA	3
	X DOT	AT	CR	J2.2E0	COURSE SPEED	RX RX	4, G7
	Y DOT	AT	CR	J2.2E0	COURSE SPEED	RX RX	4, G7
	MINUTES	63	None	NA	NA	NA	5
	HOURS	31	None	NA	NA	NA	5
	TIME SWITCH	0	None	NA	NA	NA	5

C-663

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-M.5-2. M.5/M.85 Message Data Element Translation from the J2.2 Message (Sheet 2 of 3)

Link 11/11B					Link 16		
MESSAGE	FIELD	TRANSLATION			DATA ELEMENT	VALUE	NOTES
		VALUE	REQUIRED	WORD			
M.85 (Cont'd)	HEIGHT/DEPTH	AT	CR	J2.2I	ALTITUDE, 25 FT	RX	4, G10
	HEIGHT/DEPTH SWITCH	0	None	NA	NA	NA	

APPENDIX C

TABLE C.5.2-M.5-2. M.5/M.85 Message Data Element Translation from the J2.2 Message (Sheet 3 of 3)

NOTES

1. The FJU may forward all positions with the Scale Indicator = 0.
2. The Command and Control Indicator must be set to 1 in order for an M.5 message to be constructed. If the C² Indicator is set to 0 then the M.5 will not be sent.
3. The Related TN/TN field contains the same TN as contained in the immediately preceding M.5 message. The Reference (REF) field shall be set to 0 to indicate that the track number in the M.5 message and the M.85 message is identical. Slaved Points that are indicated by REF = 1 or 2 are not used in this translation.
4. To forward both X Dot/Y Dot and Height data, two identical M.5 messages are transmitted with each being followed by an M.85 in which the alternate parameters are reported. The M.85 Switch is set to 0 when velocity is reported or to 1 when Height is reported.
5. Time other than No Statement in this message is not appropriate since this is a real-time report of a JU's position.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-M.5-3. M.5/M.85 Message Data Element Translation from the J2.3 Message (Sheet 1 of 3)

Link 11/11B				Link 16			
MESSAGE	FIELD	VALUE	TRANSLATION REQUIRED	WORD	DATA ELEMENT	VALUE	NOTES
M.5	LABEL	5	CR	J2.3I	LABEL, J-SERIES SUBLABEL, J-SERIES	2 3	
	TRACK NUMBER/ADDRESS	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	G2, G12
	SCALE INDICATOR	AR	CR	J2.3E0	LATITUDE, 0.0013 MINUTE LONGITUDE, 0.0013 MINUTE	RX RX	1
	POINT	13	CR	J2.3I	COMMAND AND CONTROL INDICATOR	1	2
	POINT AMPLIFY	4	CR	J2.3I	COMMAND AND CONTROL INDICATOR	1	
	X COORDINATE	AT	CR	J2.3E0	LATITUDE, 0.0013 MINUTE LONGITUDE, 0.0013 MINUTE	RX RX	G9
	Y COORDINATE	AT	CR	J2.3E0	LATITUDE, 0.0013 MINUTE LONGITUDE, 0.0013 MINUTE	RX RX	G9
M.85	LABEL	8	CR	J2.3I	LABEL, J-SERIES SUBLABEL, J-SERIES	2 3	
	RELATED TRACK NUMBER/TRACK NUMBER	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	3, G2, G12
	SWITCH	AR	None	NA	NA	NA	4
	REFERENCE	0	None	NA	NA	NA	3
	X DOT	AT	CR	J2.3E0	COURSE SPEED	RX RX	4, G7
	Y DOT	AT	CR	J2.3E0	COURSE SPEED	RX RX	4, G7
	MINUTES	63	None	NA	NA	NA	5
	HOURS	31	None	NA	NA	NA	5
	TIME SWITCH	0	None	NA	NA	NA	5

C-667

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-M.5-3. M.5/M.85 Message Data Element Translation from the J2.3 Message (Sheet 2 of 3)

Link 11/11B					Link 16		
<u>MESSAGE</u>	<u>FIELD</u>	<u>TRANSLATION</u>			<u>DATA ELEMENT</u>	<u>VALUE</u>	<u>NOTES</u>
		<u>VALUE</u>	<u>REQUIRED</u>	<u>WORD</u>			
M.85 (Cont'd)	HEIGHT/DEPTH	AT	CR	J2.3I	ELEVATION, 25 FT	RX	4,G10
	HEIGHT/DEPTH SWITCH	0	None	NA	NA	NA	

APPENDIX C

TABLE C.5.2-M.5-3. M.5/M.85 Message Data Element Translation from the J2.3 Message (Sheet 3 of 3)

NOTES

1. The FJU may forward all positions with the Scale Indicator = 0.
2. The Command and Control Indicator must be set to 1 in order for an M.5 message to be constructed. If the C² Indicator is set to 0 then the M.5 will not be sent.
3. The Related TN/TN field contains the same TN as contained in the immediately preceding M.5 message. The Reference field shall be set to 0 to indicate that the track number in the M.5 message and the M.85 message is identical. Slaved Points that are indicated by REF = 1 or 2 are not used in this translation.
4. To forward both X Dot/Y Dot and Height data, two identical M.5 messages are transmitted with each being followed by an M.85 in which the alternate parameters are reported. The M.85 Switch is set to 0 when velocity is reported or to 1 when Height is reported.
5. Time other than No Statement in this message is not appropriate since this is a real-time report of a JU's position.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-M.5-4. M.5/M.85 Message Data Element Translation from the J2.4 Message (Sheet 1 of 3)

MESSAGE	Link 11/11B				Link 16		
	FIELD LABEL	VALUE 5	TRANSLATION		DATA ELEMENT LABEL, J-SERIES SUBLABEL, J-SERIES	VALUE 2 4	NOTES
			REQUIRED	WORD J2.4I			
M.5	TRACK NUMBER/ADDRESS	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	G2, G12
	SCALE INDICATOR	AR	CR	J2.4E0	LATITUDE, 0.0013 MINUTE LONGITUDE, 0.0013 MINUTE	RX RX	1
	POINT	13	CR	J2.4I	COMMAND AND CONTROL INDICATOR	1	2
	POINT AMPLIFY	4	CR	J2.4I	COMMAND AND CONTROL INDICATOR	1	
	X COORDINATE	AT	CR	J2.4I	DISPLACED POSITION INDICATOR	RX	3
				J2.4E0 or	LATITUDE, 0.0013 MINUTE	RX	G9
				J2.4C4	LONGITUDE, 0.0013 MINUTE	RX	
	Y COORDINATE	AT	CR	J2.4I	LATITUDE, 0.0103 MINUTE	RX	G9
				J2.4E0 or	LONGITUDE, 0.0103 MINUTE	RX	
				J2.4C4	LATITUDE, 0.0013 MINUTE	RX	3
				J2.4C4	LONGITUDE, 0.0013 MINUTE	RX	G9
M.85	LABEL	8	CR	J2.4I	LABEL, J-SERIES SUBLABEL, J-SERIES	2 4	
	RELATED TRACK NUMBER/TRACK NUMBER	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	4, G2, G12
	SWITCH	AR	None	NA	NA	NA	5
	REFERENCE	0	None	NA	NA	NA	4
	X DOT	AT	CR	J2.4E0	COURSE SPEED	RX RX	5, G7
	Y DOT	AT	CR	J2.4E0	COURSE SPEED	RX RX	5, G7

C-671

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-M.5-4. M.5/M.85 Message Data Element Translation from the J2.4 Message (Sheet 2 of 3)

Link 11/11B			Link 16				
<u>MESSAGE</u>	<u>FIELD</u>	<u>TRANSLATION</u>			<u>DATA ELEMENT</u>	<u>VALUE</u>	<u>NOTES</u>
		<u>VALUE</u>	<u>REQUIRED</u>	<u>WORD</u>			
M.85 (Cont'd)	MINUTES	63	None	NA	NA	NA	6
	HOURS	31	None	NA	NA	NA	6
	TIME SWITCH	0	None	NA	NA	NA	6
	HEIGHT/DEPTH	RX	CR	J2.4I	DEPTH, 15 METERS	RX	5, G15
	HEIGHT/DEPTH SWITCH	1	None	NA	NA	NA	

APPENDIX C

TABLE C.5.2-M.5-4. M.5/M.85 Message Data Element Translation from the J2.4 Message (Sheet 3 of 3)

NOTES

1. The FJU may forward all positions with the Scale Indicator = 0.
2. The Command and Control Indicator must be set to 1 in order for an M.5 message to be constructed. If the C² Indicator is set to 0 then the M.5 will not be sent.
3. The unit position is translated from the J2.4E0 if the Displaced Position Indicator is set to 0 and from the J2.4C4 if the Displaced Position Indicator is set to 1.
4. The Related TN/TN field contains the same TN as contained in the immediately preceding M.5 message. The Reference (REF) field shall be set to 0 to indicate that the track number in the M.5 message and the M.85 message is identical. Slaved Points that are indicated by REF = 1 or 2 are not used in this translation.
5. If necessary to report X Dot, Y Dot, and Height, a second M.5 message identical to the first will be transmitted, followed by a second M.85 message in which the alternate parameters are included. The Switch is set to 0 when Course and Speed are reported as other than No Statement. The Switch is set to 1 if Minutes and Hour and/or Depth, 15 Meters are other than No Statement.
6. Time other than No Statement in this message is not appropriate since this is a real-time report of a JU's position.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-M.5-5. M.5/M.85 Message Data Element Translation from the J2.5 Message (Sheet 1 of 3)

MESSAGE	Link 11/11B			Link 16			NOTES
	FIELD LABEL	VALUE 5	TRANSLATION REQUIRED CR	WORD J2.5I	DATA ELEMENT LABEL, J-SERIES SUBLABEL, J-SERIES	VALUE 2 5	
M.5	TRACK NUMBER/ADDRESS	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	G2, G12
	SCALE INDICATOR	AR	CR	J2.5E0	LATITUDE, 0.0013 MINUTE LONGITUDE, 0.0013 MINUTE	RX RX	1
	POINT	13	CR	J2.5I	COMMAND AND CONTROL INDICATOR	1	2
	POINT AMPLIFY	4	CR	J2.5I	COMMAND AND CONTROL INDICATOR	1	
	X COORDINATE	AT	CR	J2.5I	DISPLACED POSITION INDICATOR	RX	3
				J2.5E0 or	LATITUDE, 0.0013 MINUTE	RX	G9
				J2.5C4	LONGITUDE, 0.0013 MINUTE	RX	
	Y COORDINATE	AT	CR	J2.5I	LATITUDE, 0.0103 MINUTE	RX	G9
				J2.5E0 or	LONGITUDE, 0.0103 MINUTE	RX	
				J2.5C4	LATITUDE, 0.0013 MINUTE	RX	3
					LONGITUDE, 0.0103 MINUTE	RX	G9
M.85	LABEL	8	CR	J2.5I	LABEL, J-SERIES SUBLABEL, J-SERIES	2 5	
	RELATED TRACK NUMBER/TRACK NUMBER	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	4, G2, G12
	SWITCH	1	None	NA	NA	NA	
	REFERENCE	0	None	NA	NA	NA	4
	MINUTES	63	None	NA	NA	NA	5
	HOURS	31	None	NA	NA	NA	5
	TIME SWITCH	0	None	NA	NA	NA	5

C-675

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-M.5-5. M.5/M.85 Message Data Element Translation from the J2.5 Message (Sheet 2 of 3)

Link 11/11B					Link 16		
MESSAGE	FIELD	TRANSLATION			DATA ELEMENT	VALUE	NOTES
		VALUE	REQUIRED	WORD			
M.85	HEIGHT/DEPTH	AT	CR	J2.5I	ELEVATION, 25 FT	RX	G10
(Cont'd)							
	HEIGHT/DEPTH SWITCH	0	None	NA	NA	NA	

APPENDIX C

TABLE C.5.2-M.5-5. M.5/M.85 Message Data Element Translation from the J2.5 Message (Sheet 3 of 3)

NOTES

1. The FJU may forward all positions with the Scale Indicator = 0.
2. The Command and Control Indicator must be set to 1 in order for an M.5 message to be constructed. If the C² Indicator is set to 0 then the M.5 will not be sent.
3. The unit position is translated from the J2.5E0 if the Displaced Position Indicator is set to 0 and from the J2.5C4 if the Displaced Position Indicator is set to 1.
4. The Related TN/TN field contains the same TN as contained in the immediately preceding M.5 message. The Reference (REF) field shall be set to 0 to indicate that the track number in the M.5 message and the M.85 message is identical. Slaved Points that are indicated by REF = 1 or 2 are not used in this translation.
5. Time other than No Statement in this message is not appropriate since this is a real-time report of a JU's position.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-M.5-6. M.5/M.85 Message Data Element Translation from the J2.6 Message (Sheet 1 of 3)

Link 11/11B				Link 16			
MESSAGE	FIELD LABEL	VALUE 5	TRANSLATION		DATA ELEMENT LABEL, J-SERIES SUBLABEL, J-SERIES	VALUE 2 6	NOTES
			REQUIRED CR	WORD J2.6I			
M.5	TRACK NUMBER/ADDRESS	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	G2, G12
	SCALE INDICATOR	AR	CR	J2.6E0	LATITUDE, 0.0013 MINUTE LONGITUDE, 0.0013 MINUTE	RX RX	1
	POINT	13	CR	J2.6I	COMMAND AND CONTROL INDICATOR	1	2
	POINT AMPLIFY	4	CR	J2.6I	COMMAND AND CONTROL INDICATOR	1	
	X COORDINATE	AT	CR	J2.6E0	LATITUDE, 0.0013 MINUTE LONGITUDE, 0.0013 MINUTE	RX RX	G9
	Y COORDINATE	AT	CR	J2.6E0	LATITUDE, 0.0013 MINUTE LONGITUDE, 0.0013 MINUTE	RX RX	G9
M.85	LABEL	8	CR	J2.6I	LABEL, J-SERIES SUBLABEL, J-SERIES	2 6	
	RELATED TRACK NUMBER/TRACK NUMBER	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	3, G2, G12
	SWITCH	AR	None	NA	NA	NA	4
	REFERENCE	0	None	NA	NA	NA	3
	X DOT	AT	CR	J2.6E0	COURSE SPEED	RX RX	4, G7
	Y DOT	AT	CR	J2.6E0	COURSE SPEED	RX RX	4, G7
	MINUTES	63	None	NA	NA	NA	5
	HOURS	31	None	NA	NA	NA	5
	TIME SWITCH	0	None	NA	NA	NA	5

C-679

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-M.5-6. M.5/M.85 Message Data Element Translation from the J2.6 Message (Sheet 2 of 3)

Link 11/11B					Link 16		
MESSAGE	FIELD	TRANSLATION			DATA ELEMENT	VALUE	NOTES
		VALUE	REQUIRED	WORD			
M.85	HEIGHT/DEPTH	AT	CR	J2.6I	ELEVATION, 25 FT	RX	4,G10
(Cont'd)							
	HEIGHT/DEPTH SWITCH	0	None	NA	NA	NA	

APPENDIX C

TABLE C.5.2-M.5-6. M.5/M.85 Message Data Element Translation from the J2.6 Message (Sheet 3 of 3)

NOTES

1. The FJU may forward all positions with the Scale Indicator = 0.
2. The Command and Control Indicator must be set to 1 in order for an M.5 message to be constructed. If the C² Indicator is set to 0 then the M.5 will not be sent.
3. The Related TN/TN field contains the same TN as contained in the immediately preceding M.5 message. The Reference (REF) field shall be set to 0 to indicate that the track number in the M.5 message and the M.85 message is identical. Slaved Points that are indicated by REF = 1 or 2 are not used in this translation.
4. To forward both X Dot/Y Dot and Height data, two identical M.5 messages are transmitted with each being followed by an M.85 in which the alternate parameters are reported. The M.85 Switch is set to 0 when velocity is reported or to 1 when Height is reported.
5. Time other than No Statement in this message is not appropriate since this is a real-time report of a JU's position.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-M.5-7. M.5/M.85 Message Data Element Translation from the J3.0 Message (Sheet 1 of 5)

MESSAGE	Link 11/11B			Link 16			NOTES
	FIELD LABEL	VALUE 5	TRANSLATION REQUIRED CR	WORD J3.0I	DATA ELEMENT LABEL, J-SERIES SUBLABEL, J-SERIES	VALUE 3 0	
M.5	TRACK NUMBER/ADDRESS	AT	CR	J3.0I	TRACK NUMBER, REFERENCE	RX	G13
	SCALE INDICATOR	AR	CR	J3.0E0	LATITUDE, 0.0103 MINUTE LONGITUDE, 0.0103 MINUTE	RX RX	1
	POINT	AT	CR	J3.0I	POINT TYPE POINT AMPLIFICATION	RX RX	2
	POINT AMPLIFY	AT	CR	J3.0I	POINT TYPE POINT AMPLIFICATION	RX RX	2
	X COORDINATE	AT	CR	J3.0I	SLAVED INDICATOR	0	3
				J3.0E0 or	LATITUDE, 0.0103 MINUTE LONGITUDE, 0.0103 MINUTE	RX RX	G9
				J3.0I	SLAVED INDICATOR	1	3
				J3.0C1	DELTA LATITUDE, 0.0313 MINUTE 1	RX	G9
					DELTA LONGITUDE, 0.0313 MINUTE 1	RX	
				J2.x or J3.x	TRACK NUMBER (POSITION)	RX	
	Y COORDINATE	AT	CR	J3.0I	SLAVED INDICATOR	0	3
				J3.0E0 or	LATITUDE, 0.0103 MINUTE LONGITUDE, 0.0103 MINUTE	RX RX	G9
				J3.0I	SLAVED INDICATOR	1	3
				J3.0C1	DELTA LATITUDE, 0.0313 MINUTE 1	RX	G9
					DELTA LONGITUDE, 0.0313 MINUTE 1	RX	
				J2.x or J3.x	TRACK NUMBER (POSITION)	RX	
M.85	LABEL	8	CR	J3.0I	LABEL, J-SERIES SUBLABEL, J-SERIES	3 0	
	RELATED TRACK NUMBER/TRACK NUMBER	AT	CR	J3.0I or	SLAVED INDICATOR	RX	5
				J3.0C2 or	TRACK NUMBER, REFERENCE	RX	G13
				J3.0C4	TRACK NUMBER, RELATED TRACK NUMBER, RELATED 1	RX RX	G13 G13

C-683

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-M.5-7. M.5/M.85 Message Data Element Translation from the J3.0 Message (Sheet 2 of 5)

Link 11/11B				Link 16			
MESSAGE	FIELD	TRANSLATION			DATA ELEMENT	VALUE	NOTES
		VALUE	REQUIRED	WORD			
M.85 (Cont'd)	SWITCH	AT	CR	J3.0I	MINUTE	RX	4
					HOUR	RX	
				J3.0E0	ALTITUDE, 100 FT 1	RX	
				J3.0C2	COURSE	RX	
					SPEED	RX	
	REFERENCE	AT	CR	J3.0I	SLAVED INDICATOR	RX	5
	X DOT	AT	CR	J3.0C2	COURSE	RX	G7
					SPEED	RX	
	Y DOT	AT	CR	J3.0C2	COURSE	RX	G7
					SPEED	RX	
	MINUTES	RX	=	J3.0I	MINUTE	RX	
	HOURS	RX	=	J3.0I	HOUR	RX	
	TIME SWITCH	AT	CR	J3.0I	TIME FUNCTION	RX	6
	HEIGHT/DEPTH	AT	CR	J3.0E0	ALTITUDE, 100 FT 1	RX	7
					ALTITUDE, 100 FT 2	1023	
	HEIGHT/DEPTH SWITCH	0	None	NA	NA	NA	

C-684

APPENDIX C

TABLE C.5.2-M.5-7. M.5/M.85 Message Data Element Translation from the J3.0 Message (Sheet 3 of 5)

NOTES

1. The FJU may forward all positions with Scale Indicator = 0.
2. Point and Point Amplify are determined from Point Type and Point Amplification as follows:

Link 11/11B		Link 16	
POINT	POINT AMPLIFY	POINT TYPE	POINT AMPLIFICATION
2 - HAZARD	0 - NO STATEMENT 1 - NAVIGATION 2 - MINE 3 - IMPACT POINT 4 - GROUND ZERO 5 - AIM/WEAPON ENTRY POINT 6 - MISSILE LAUNCH POINT 7 - EA DECOY	0 - HAZARD	0 - NO STATEMENT 1 - NAVIGATION 2 - MINE 3 - IMPACT POINT 4 - GROUND ZERO 5 - AIM/WEAPON ENTRY POINT 6 - MISSILE LAUNCH POINT 7 - ELECTRONIC ATTACK (EA) DECOY
10 - HAZARD, 1	0 - ENGAGEMENT POINT 1 - OIL RIG		8 - ENGAGEMENT POINT 9 - OIL RIG
4 - REFERENCE POINT (GENERAL)	0 - NO STATEMENT 1 - MARSHAL POINT 2 - WAYPOINT 3 - CORRIDOR TAB 4 - POSITION AND INTENDED MOVEMENT (PIM) 5 - DISPOSITION CENTER 6 - FORMATION CENTER 7 - SEARCH AREA	1 - REFERENCE POINT (GENERAL)	0 - NO STATEMENT 1 - MARSHALL POINT 2 - WAYPOINT 3 - CORRIDOR TAB 4 - POSITION AND INTENDED MOVEMENT (PIM) 5 - DISPOSITION CENTER 6 - FORMATION CENTER 7 - SEARCH AREA
8 - REFERENCE POINT (GENERAL), 1	0 - VICTOR LIMA (VL)		8 - VICTOR LIMA (VL)

APPENDIX C

TABLE C.5.2-M.5-7. M.5/M.85 Message Data Element Translation from the J3.0 Message (Sheet 4 of 5)

NOTES (Continued)

2. (Continued)

Link 11/11B		Link 16	
POINT	POINT AMPLIFY	POINT TYPE	POINT AMPLIFICATION
5 - STATION (GENERAL)	1 - SUBMARINE POSITION AND INTENDED MOVEMENT (SIM)	2 - STATION (GENERAL)	9 - SUBMARINE POSITION AND INTENDED MOVEMENT (SIM)
	0 - NO STATEMENT		0 - NO STATEMENT
	1 - TOMCAT		1 - TOMCAT
	2 - PICKET		2 - PICKET
	3 - RENDEZVOUS		3 - RENDEZVOUS
6 - STATION (AIR)	5 - REPLENISHMENT	3 - STATION (AIR)	5 - REPLENISHMENT
	6 - RESCUE		6 - RESCUE
	0 - NO STATEMENT		0 - NO STATEMENT
	1 - COMBAT AIR PATROL (CAP)		1 - COMBAT AIR PATROL (CAP)
	2 - AIRBORNE EARLY WARNING (AEW)		2 - AIRBORNE EARLY WARNING (AEW)
	3 - ANTISUBMARINE WARFARE (ASW) FIXED WING		3 - ANTISUBMARINE WARFARE (ASW) FIXED WING
	4 - ANTISUBMARINE WARFARE (ASW) HELICOPTER (HELO)		4 - ANTISUBMARINE WARFARE (ASW) HELICOPTER (HELO)
	5 - REPLENISHMENT		5 - REPLENISHMENT
	6 - STRIKE INITIAL POINT (IP)		6 - STRIKE INITIAL POINT (IP)
	7 - TACAN		7 - TACAN
9 - STATION (AIR), 1	0 - TANKER		8 - TANKER
	1 - ORBIT POINT		12 - ORBIT POINT

3. If the J3.0I Slaved Indicator = 0, translate the M.5 X and Y Coordinates from the J3.0E0 Latitude and Longitude in accordance with General Note 9. If the J3.0I Slaved Indicator = 1, determine the Latitude and Longitude of the point by applying the J3.0C1 Delta Latitude, 0.0313 Minute 1 and Delta Longitude, 0.0313 Minute 1 to the position of the Related TN, if available

APPENDIX C

TABLE C.5.2-M.5-7. M.5/M.85 Message Data Element Translation from the J3.0 Message (Sheet 5 of 5)

NOTES (Continued)

3. (Continued)

from previous J2.x or J3.x messages, extrapolated to the time of receipt of this J3.0 message. Then translate the M.5 X and Y Coordinates from the resulting latitude and longitude of the J3.0 point in accordance with General Note 9. If the position of the Related TN is not available, the J3.0 message shall not be forwarded.

4. The Switch value is set to 0 when Course and Speed are reported as other than No Statement. The Switch value is set to 1 if Minute and Hour and/or Altitude, 100 Ft 1 are other than No Statement.

5. When the Slaved Indicator = 0, M.85 Track Number is translated from J3.0I Track Number, Reference, and M.85 Reference shall be set to value 0. When the Slaved Indicator = 1 and the J3.0C4 word is received, M.85 Related Track Number is translated from J3.0C4 Track Number, Related 1 and M.85 Reference shall be set to value 2. When the Slaved Indicator = 1 and the J3.0C4 word is not received, M.85 Related Track Number is translated from J3.0C2 Track Number, Related, and M.85 Reference shall be set to value 1.

6. Time Switch/Time Function Equivalence:

Link 11/11B	Link 16
TIME SWITCH	TIME FUNCTION
0	5
1	0-4, 6, 7

7. When the bit code value for Altitude, 100 Ft 2 in the J3.0E0 word is set to a value other than 1023, this data element represents a maximum altitude and Altitude, 100 Ft 1 represents a minimum altitude. Height/Depth Unknown will be forwarded when minimum/maximum altitudes are specified in the J3.0E0 word.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-M.5-8. M.5/M.85 Message Data Element Translation from the J3.1 Message (Sheet 1 of 2)

MESSAGE	Link 11/11B				Link 16		
	FIELD	VALUE	TRANSLATION	WORD	DATA ELEMENT	VALUE	NOTES
M.5	LABEL	5	REQUIRED	J3.1I	LABEL, J-SERIES SUBLABEL, J-SERIES	3 1	
	TRACK NUMBER/ADDRESS	AT	CR	J3.1I	TRACK NUMBER, REFERENCE	RX	G13
	SCALE INDICATOR	AR	CR	J3.1E0	LATITUDE, 0.0051 MINUTE LONGITUDE, 0.0051 MINUTE	RX RX	1
	POINT	7	CR	J3.1I	LABEL, J-SERIES SUBLABEL, J-SERIES	3 1	
	POINT AMPLIFY	AT	CR	J3.1I	EMERGENCY TYPE	RX	2
	X COORDINATE	AT	CR	J3.1E0	LATITUDE, 0.0051 MINUTE LONGITUDE, 0.0051 MINUTE	RX RX	G9
	Y COORDINATE	AT	CR	J3.1E0	LATITUDE, 0.0051 MINUTE LONGITUDE, 0.0051 MINUTE	RX RX	G9
M.85	LABEL	8	CR	J3.1I	LABEL, J-SERIES SUBLABEL, J-SERIES	3 1	
	RELATED TRACK NUMBER/TRACK NUMBER	AT	CR	J3.1I	TRACK NUMBER, REFERENCE	RX	G13
	SWITCH	1	None	NA	NA	NA	3
	REFERENCE	0	None	NA	NA	NA	
	X DOT	NA	None	NA	NA	NA	3
	Y DOT	NA	None	NA	NA	NA	3
	MINUTES	RX	=	J3.1E0	MINUTE	RX	
	HOURS	RX	=	J3.1E0	HOURL	RX	
	TIME SWITCH	AT	CR	J3.1E0	TIME FUNCTION	RX	4
	HEIGHT/DEPTH	255	None	NA	NA	NA	3
	HEIGHT/DEPTH SWITCH	0	None	NA	NA	NA	3

C-689

APPENDIX C

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.5-8. M.5/M.85 Message Data Element Translation from the J3.1 Message (Sheet 2 of 2)

NOTES

1. The FJU may forward all positions with Scale Indicator = 0.

2. Point Amplify/Emergency Type Equivalence:

Link 11/11B	Link 16
POINT AMPLIFY	EMERGENCY TYPE
0	0
	6-15
1	1 or 3
2	2 or 4
3	5

3. Course, speed, and altitude are not reported in the J3.1 message. The Switch value is set to 1 to report Minute and Hour.

4. Time Switch/Time Function Equivalence:

Link 11/11B	Link 16
TIME SWITCH	TIME FUNCTION
0	5
1	0-4, 6, 7

C-691

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-M.5-9. M.5/M.85 Message Data Element Translation from the J3.5 Message (Sheet 2 of 5)

Link 11/11B			Link 16		
<u>MESSAGE</u>	<u>FIELD</u>	<u>TRANSLATION</u>	<u>DATA ELEMENT</u>	<u>VALUE</u>	<u>NOTES</u>
M.85	HEIGHT/DEPTH SWITCH	<u>VALUE</u> 0	<u>REQUIRED</u> None	<u>WORD</u> NA	
(Cont'd)				NA	

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.5-9. M.5/M.85 Message Data Element Translation from the J3.5 Message (Sheet 3 of 5)

NOTES

1. The FJU may forward all positions with Scale Indicator = 0.
2. If the J3.5 Exercise Indicator = 0, the Point/Point Amplify values will be based upon Identity and Land (Ground) Platform relationships. The following listing depicts the correspondence between the values:

Link 11/11B		Link 16	
POINT	POINT AMPLIFY	IDENTITY	LAND (GROUND) PLATFORM
1 - RADAR	0 - NO STATEMENT	0-4, 7	33 - RADAR SITE
14 - SUPPORT UNIT (SU)	0 - NO STATEMENT	3	0 - NO STATEMENT
	1 - MHQ		41 - MARITIME HEADQUARTERS
	2 - AIR BASE		7 - AIRFIELD/ AIRBASE
	3 - SAM SITE		40 - SURFACE-TO- AIR MISSILE (SAM) SITE
			49 - THEATER HIGH ALTITUDE AREA DEFENSE (THAAD)
			57 - BALLISTIC MISSILE DEFENSE SITE
	4 - ASRT		42 - AIR SUPPORT RADAR TEAM (ASRT)
	5 - DASC		43 - DIRECT AIR SUPPORT CENTER (DASC)
	6 - FACP		44 - FORWARD AIR CONTROL PARTY (FACP)
	7 - ADA/BOC/TDS		22 - AIR DEFENSE ARTILLERY
			45 - BATTALION OPERATIONS CENTER (BOC)
			46 - TACTICAL DATA SYSTEM (TDS)

APPENDIX C

TABLE C.5.2-M.5-9. M.5/M.85 Message Data Element Translation from the J3.5 Message (Sheet 4 of 5)

NOTES (Continued)

2. (Continued)

<u>Link 11/11B</u>		<u>Link 16</u>	
<u>POINT</u>	<u>POINT AMPLIFY</u>	<u>IDENTITY</u>	<u>LAND (GROUND) PLATFORM</u>
15 - ENEMY POINT	0 - NO STATEMENT	5 or 6	50 - JOINT TACTICAL GROUND STATION (JTGS)
	1 - TROOP CONCENTRATION		0 - NO STATEMENT ALL OTHERS NOT LISTED
	2 - AIR BASE		1 - TROOP CONCENTRATION/ UNIT
	3 - SAM SITE		7 - AIRFIELD/ AIRBASE
	4 - ARTILLERY		40 - SURFACE-TO- AIR MISSILE (SAM) SITE
	5 - CONVOY		21 - FIELD ARTILLERY
	6 - RAIL		13 - CONVOY
	7 - BRIDGE		18 - TRAIN
			26 - BRIDGE

All other combinations shall be forwarded as Point = 4 (Reference Point General) and Point Amplify = 0 (No Statement).

3. The Switch value is set to 0 when Course and Speed are reported as other than No Statement. The Switch value is set to 1 when Minute and Hour or Elevation, 25 ft are other than No Statement. If both course and speed and time or elevation are required to be forwarded, an M.5/M.85(Switch=0) shall be immediately followed by an M.5/M.85(Switch=1).

4. The Reference (REF) field shall be set to 0 to indicate that the track number in the M.5 message and the M.85 message is identical. Slaved Points that are indicated by REF = 1 or 2 are not used in this translation.

5. Time Switch/Time Function Equivalence:

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.5-9. M.5/M.85 Message Data Element Translation from the J3.5 Message (Sheet 5 of 5)

NOTES (Continued)

5. (Continued)

Link 11/11B
TIME SWITCH
0
1

Link 16
TIME FUNCTION
5
0-4, 6, 7

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-M.5-10. M.5/M.85 Message Data Element Translation from the J14.0 Message (Sheet 1 of 2)

MESSAGE	Link 11/11B			Link 16		
	FIELD	VALUE	TRANSLATION	DATA ELEMENT	VALUE	NOTES
M.5	LABEL	5	REQUIRED	WORD	14	1
			CR	J14.0I	SUBLABEL, J-SERIES	0
	TRACK NUMBER/ADDRESS	AT	CR	J14.0I	TRACK NUMBER, REFERENCE	RX G13
	SCALE INDICATOR	AR	CR	J14.0C2	LATITUDE, 0.0051 MINUTE LONGITUDE, 0.0051 MINUTE	RX RX 2
	POINT	0	CR	J14.0I J14.0C1	FIX OR BEARING DESCRIPTOR PARAMETER SOURCE	0 3 or 4 1
	POINT AMPLIFY	0	None	NA	NA	NA
	X COORDINATE	AT	CR	J14.0C2	LATITUDE, 0.0051 MINUTE LONGITUDE, 0.0051 MINUTE	RX RX G9
	Y COORDINATE	AT	CR	J14.0C2	LATITUDE, 0.0051 MINUTE LONGITUDE, 0.0051 MINUTE	RX RX G9
M.85	LABEL	8	CR	J14.0I	LABEL, J-SERIES SUBLABEL, J-SERIES	14 0
	RELATED TRACK NUMBER/TRACK NUMBER	AT	CR	J14.0I	TRACK NUMBER, REFERENCE	RX G13
	SWITCH	AR	None	NA	NA	NA 3
	REFERENCE	0	None	NA	NA	NA
	X DOT	AT	CR	J14.0C1	COURSE SPEED	RX RX G7
	Y DOT	AT	CR	J14.0C1	COURSE SPEED	RX RX G7
	MINUTES	RX	=	J14.0I	MINUTE	RX
	HOURS	RX	=	J14.0I	HOUR	RX
	TIME SWITCH	1	None	NA	NA	NA
	HEIGHT/DEPTH	AT	CR	J14.0C1	ALTITUDE, 25 FT	RX G10
	HEIGHT/DEPTH SWITCH	0	None	NA	NA	NA

C-697

APPENDIX C

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.5-10. M.5/M.85 Message Data Element Translation from the J14.0 Message (Sheet 2 of 2)

NOTES

1. The M.5 message is only translated from a J14.0 message when Fix or Bearing Descriptor is set to zero and Parameter Source is set to 3 or 4.
2. The FJU may forward all positions with Scale Indicator = 0.
3. The Switch value is set to 0 when Course and Speed are reported as other than No Statement. The Switch value is set to 1 if Minute and Hour or Altitude, 25 Ft, are other than No Statement. If both Switch = 0 and 1 are required, the M.5/M.85(Switch=0) shall be immediately followed by an identical M.5, followed by an M.85(Switch=1).

TABLE C.5.2-M.6A-1. M.6A Message Data Element Translation from the J3.7 Message (Sheet 1 of 4)

Link 11/11B					Link 16		
MESSAGE	FIELD	VALUE	TRANSLATION REQUIRED	WORD	DATA ELEMENT	VALUE	NOTES
M.6A	LABEL	6	CR	J3.7I	LABEL, J-SERIES	3	
	TRACK NUMBER	AT	CR	J3.7I	TRACK NUMBER, REFERENCE	RX	G13
	BEARING ACCURACY	AT	CR	J3.7C1	BEARING ACCURACY	RX	2
	BROAD CLASSIFICATION	0	None	NA	NA	NA	
	ACTION VALUE	AR	None	NA	NA	NA	1
	SUB LABEL	0	CR	J3.7I	SUBLABEL, J-SERIES	7	
	BEARING	RX	=	J3.7C1	BEARING	RX	
	TN OF ORIGIN	AT	CR	J3.7C1	TRACK NUMBER, ORIGIN	RX	G13
	THREAT EVALUATION	AT	CR	J3.7I	EXERCISE INDICATOR IDENTITY	RX RX	3
	PLATFORM	AT	CR	J3.7C1 J3.7C4	ENVIRONMENT/CATEGORY PLATFORM	RX RX	4
	FREQUENCY	AT	CR	J3.7C4	FREQUENCY, 1 FREQUENCY MULTIPLIER, 1 FREQUENCY, 2 FREQUENCY MULTIPLIER, 2 FREQUENCY/FREQUENCY RANGE INDICATOR	RX RX RX RX RX	G19
	JAMMER RECEIVED SIGNAL LEVEL	0	None	NA	NA	NA	
	ELEVATION	AT	CR	J3.7C1	ELEVATION ANGLE	1	7
	SWITCH	AR	None	NA	NA	NA	5
	AMPLIFYING CHARACTERISTICS	0	None	NA	NA	NA	
	TIME STALE	AT	CR	J3.7I	HOUR MINUTE SECOND	RX RX RX	6

C-699

APPENDIX C

MIL-STD-6016B

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.6A-1. M.6A Message Data Element Translation from the J3.7 Message (Sheet 2 of 4)

NOTES

1. When translating to Broad Classification, Bearing Accuracy, Bearing, or TN of Origin, set Action value to 0. When translating to Threat Evaluation, Platform, Time Stale, Elevation, or Frequency, set Action value to 1. In order to forward all data received, two M.6A (ACT=0 and ACT=1) messages may have to be sent.

2. Bearing Accuracy is determined as follows:

Link 11/11B	Link 16
BEARING ACCURACY	BEARING ACCURACY (<= 1.0 DEGREES)
0(< 1 DEGREE)	7(<= 1.0 DEGREES)
	THROUGH
	15(<= 0.001 DEGREES)
1(< 2 DEGREES)	6(<= 2.0 DEGREES)
2(< 5 DEGREES)	3(<= 5.0 DEGREES)
	4(<= 4.0 DEGREES)
	5(<= 3.0 DEGREES)
3(> = 5 DEGREES/NO STATEMENT)	0(NO STATEMENT)
	1(> 10.0 DEGREES)
	2(<= 10.0 DEGREES)

3. When the J3.7I Exercise Indicator = 1, Threat Evaluation shall be set to 2, regardless of J3.7I Identity. When the J3.7I Exercise Indicator = 0, Threat Evaluation is determined from the J3.7I Identity field as follows:

Link 11/11B	Link 16
THREAT EVALUATION	IDENTITY
0 - PENDING	0 - PENDING
	7 - UNDEFINED
1 - UNKNOWN	1 - UNKNOWN
2 - NONTREAT/FRIEND	2 - ASSUMED FRIEND
	3 - FRIEND
	4 - NEUTRAL
3 - THREAT	5 - SUSPECT
	6 - HOSTILE

4. Platform is determined from the J3.7C1 Environment/Category and J3.7C4 Platform fields as follows:

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.6A-1. M.6A Message Data Element Translation from the J3.7 Message (Sheet 3 of 4)

NOTES (Continued)

4. (Continued)

<u>Link 11/11B</u> <u>PLATFORM</u> 0 - NO STATEMENT		<u>Link 16</u> <u>ENVIRONMENT/CATEGORY</u> 0 - NO STATEMENT/UNKNOWN 6, 7 - UNDEFINED	
<u>Link 11/11B</u> <u>PLATFORM</u> 2 - AIRBORNE (AIRCRAFT EXCLUDING MISSILE)		<u>Link 16</u> <u>ENVIRONMENT/CATEGORY</u> 1 - SPACE	<u>SPACE PLATFORM</u> 0-63
<u>PLATFORM</u> 1 - MISSILE 2 - AIRBORNE (AIRCRAFT EXCLUDING MISSILE) 6 - MISSILE CONTROL UNIT (AIRBORNE)		<u>ENVIRONMENT/CATEGORY</u> 2 - AIR 2 - AIR 2 - AIR	<u>AIR PLATFORM</u> 13, 37-39, 41-45 0-12, 14-35, 40, 46-63 36
<u>PLATFORM</u> 3 - SURFACE 7 - MISSILE CONTROL UNIT (SURFACE/SUBSURFACE)		<u>ENVIRONMENT/CATEGORY</u> 3 - SURFACE (MARITIME) 3 - SURFACE (MARITIME)	<u>SURFACE (MARITIME) PLATFORM</u> 0-32, 34-63 33
<u>PLATFORM</u> 4 - SUBSURFACE (SUBMARINE) 7 - MISSILE CONTROL UNIT (SURFACE/SUBSURFACE)		<u>ENVIRONMENT/CATEGORY</u> 4 - SUBSURFACE (MARITIME) 4 - SUBSURFACE (MARITIME)	<u>SUBSURFACE (MARITIME) PLATFORM</u> 0-48, 50-63 49
<u>PLATFORM</u> 5 - LAND		<u>ENVIRONMENT/CATEGORY</u> 5 - LAND (GROUND)	<u>LAND (GROUND) PLATFORM</u> 0-63

5. When translating to Frequency in the M.6A, set Switch to 0. When translating to Elevation in the M.6A, set Switch to 1. In order to forward both Frequency and Elevation, two M.6A(ACT=1, SW=0, and ACT=1, SW=1) messages must be sent.

APPENDIX C

TABLE C.5.2-M.6A-1. M.6A Message Data Element Translation from the J3.7
Message (Sheet 4 of 4)

NOTES (Continued)

6. Time Stale is determined from the J3.7I Hour, Minute and Second fields by subtracting Hour, Minute and Second from the estimated time of transmission of the forwarded M.6A message, to the nearest 0.25 second. If the result is greater than 31.5 seconds, or if Hour, Minute, or Second is received as No Statement, translate to Time Stale = 127, No Statement.

7. When J3.7C1 Elevation Angle/Altitude Indicator $\neq 1$ or Elevation Angle = 512 (No Statement), the M.6A(ACT=1) shall not be transmitted with Switch = 1. Otherwise J3.7 Elevation Angle equates to the M.6A Elevation field.

TABLE C.5.2-M.6A-2. M.6A Message Data Element Translation from the J14.0 Message (Sheet 1 of 4)

Link 11/11B					Link 16		
MESSAGE	FIELD	VALUE	TRANSLATION		DATA ELEMENT	VALUE	NOTES
M.6A	LABEL	6	REQUIRED	WORD	LABEL, J-SERIES	14	
	TRACK NUMBER	AT	CR	J14.0I	TRACK NUMBER, REFERENCE	RX	G13
	ACTION VALUE	AR	None	NA	NA	NA	1
	SUB LABEL	0	CR	J14.0I	SUBLABEL, J-SERIES	0	
	BEARING ACCURACY	AT	CR	J14.0C1	BEARING ACCURACY	RX	2
	BROAD CLASSIFICATION	RX	=	J14.0C3	BROAD CLASSIFICATION	RX	
	BEARING	RX	=	J14.0C1	BEARING	RX	
	TN OF ORIGIN	AT	CR	J14.0E0	TRACK NUMBER, ORIGIN	RX	G13
	THREAT EVALUATION	AT	CR	J14.0I	THREAT EVALUATION	RX	3
	PLATFORM	AT	CR	J14.0I J14.0C5	ENVIRONMENT/CATEGORY PLATFORM	RX RX	4
	FREQUENCY	AT	CR	J14.0E0	FREQUENCY, 1 FREQUENCY MULTIPLIER, 1 FREQUENCY, 2 FREQUENCY MULTIPLIER, 2 FREQUENCY/FREQUENCY RANGE INDICATOR	RX RX RX RX RX	G19
	JAMMER RECEIVED SIGNAL LEVEL	RX	=	J14.0C4	JAMMER RECEIVED SIGNAL LEVEL	RX	
	ELEVATION	AT	CR	J14.0C1	ELEVATION ANGLE/ALTITUDE INDICATOR ELEVATION ANGLE	1 RX	5
	SWITCH	AR	None	NA	NA	NA	6
	AMPLIFYING CHARACTERISTICS	RX	=	J14.0C3	AMPLIFYING CHARACTERISTICS	RX	
	TIME STALE	AT	CR	J14.0I	HOURLY MINUTE SECOND	RX RX RX	7

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.6A-2. M.6A Message Data Element Translation from the J14.0 Message (Sheet 2 of 4)

NOTES

1. When translating to Bearing Accuracy, Broad Classification, Bearing, or TN of Origin, set Action Value to 0. When translating to Threat Evaluation, Platform, Frequency, Jammer Received Signal Level, Elevation, Amplifying Characteristics, or Time Stale, set Action Value to 1. In order to forward all data received, two or three M.6A(ACT=0 and/or ACT=1, SW=0 and/or ACT=1, SW=1) messages may have to be sent.

2. Bearing Accuracy is determined as follows:

Link 11/11B	Link 16
BEARING ACCURACY	BEARING ACCURACY (<= 1.0 DEGREES)
0(< 1 DEGREE)	7(<= 1.0 DEGREES)
	THROUGH
	15(<= 0.001 DEGREES)
1(< 2 DEGREES)	6(<= 2.0 DEGREES)
2(< 5 DEGREES)	3(<= 5.0 DEGREES)
	4(<= 4.0 DEGREES)
	5(<= 3.0 DEGREES)
3(> = 5 DEGREES/NO STATEMENT)	0(NO STATEMENT)
	1(> 10.0 DEGREES)
	2(<= 10.0 DEGREES)

3. Threat Evaluation is determined as follows:

Link 11/11B	Link 16
THREAT EVALUATION	THREAT EVALUATION
0 - PENDING	0 - PENDING/NO STATEMENT
	5-7 - UNDEFINED
1 - UNKNOWN	1 - UNKNOWN
2 - NONTHREAT/FRIEND	2 - NON-THREAT
	4 - FRIEND
3 - THREAT	3 - THREAT

4. Platform is determined from the J14.0I Environment/Category and J14.0C5 Platform fields as follows:

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.6A-2. M.6A Message Data Element Translation from the J14.0 Message (Sheet 3 of 4)

NOTES (Continued)

4. (Continued)

Link 11/11B PLATFORM	Link 16 ENVIRONMENT/CATEGORY
0 - NO STATEMENT	0 - NO STATEMENT/UNKNOWN 6, 7 - UNDEFINED

Link 11/11B PLATFORM	Link 16 ENVIRONMENT/CATEGORY	SPACE PLATFORM
2 - AIRBORNE (AIRCRAFT EXCLUDING MISSILE)	1 - SPACE	0-63

PLATFORM	ENVIRONMENT/CATEGORY	AIR PLATFORM
1 - MISSILE	2 - AIR	13, 37-39, 41-45
2 - AIRBORNE (AIRCRAFT EXCLUDING MISSILE)	2 - AIR	0-12, 14-35, 40, 46-63
6 - MISSILE CONTROL UNIT (AIRBORNE)	2 - AIR	36

PLATFORM	ENVIRONMENT/CATEGORY	SURFACE (MARITIME) PLATFORM
3 - SURFACE	3 - SURFACE (MARITIME)	0-32, 34-63
7 - MISSILE CONTROL UNIT (SURFACE/SUBSURFACE)	3 - SURFACE (MARITIME)	33

PLATFORM	ENVIRONMENT/CATEGORY	SUBSURFACE (MARITIME) PLATFORM
4 - SUBSURFACE (SUBMARINE)	4 - SUBSURFACE (MARITIME)	0-48, 50-63
7 - MISSILE CONTROL UNIT (SURFACE/SUBSURFACE)	4 - SUBSURFACE (MARITIME)	49

PLATFORM	ENVIRONMENT/CATEGORY	LAND (GROUND) PLATFORM
5 - LAND	5 - LAND (GROUND)	0-63

5. If J14.0C1 Elevation Angle/Altitude Indicator (EL/ALT IND) $\neq$ 1 or Elevation Angle (EL ANG) = 512 (No Statement), and J14.0C4 Jammer Received Signal Level (JRSL) or J14.0I Amplifying Characteristics (AC) is not No Statement, the M.6A(ACT=1, SW=1) shall be transmitted with Elevation = 0 because there is not a No Statement value for M.6A Elevation. If J14.0C1 EL/ALT IND $\neq$ 1 or EL ANG = 512 and J14.0C4 JRSL and J14.0I AC are both No Statement, the M.6A shall not be transmitted with Switch = 1. Otherwise, J14.0C1 Elevation Angle equates to M.6A Elevation.

APPENDIX C

TABLE C.5.2-M.6A-2. M.6A Message Data Element Translation from the J14.0 Message (Sheet 4 of 4)

NOTES (Continued)

6. When translating to Frequency in the M.6A, set Switch to 0. When translating to Elevation in the M.6A, set Switch to 1. In order to forward both Frequency and Elevation, two M.6A(ACT=1, SW=0, and ACT=1, SW=1) messages must be sent.

7. Time Stale is determined from the J14.0I Hour, Minute and Second fields by subtracting Hour, Minute, and Second from the estimated time of transmission of the forwarded M.6A message, to the nearest 0.25 second. If the result is greater than 31.5 seconds, or if Hour, Minute, or Second is received as No Statement, translate to Time Stale = 127 (No Statement).

TABLE C.5.2-M.6B-1. M.6B/M.86B Message Data Element Translation from the J3.7 Message (Sheet 1 of 6)

Link 11/11B					Link 16		
MESSAGE	FIELD	VALUE	TRANSLATION		DATA ELEMENT	VALUE	NOTES
M.6B	LABEL	6	REQUIRED	WORD	LABEL, J-SERIES	3	
	TRACK NUMBER	AT	CR	J3.7I	TRACK NUMBER, REFERENCE	RX	G13
	FIX OR BEARING	AT	CR	J3.7I	FIX OR BEARING DESCRIPTOR	RX	1
	THREAT EVALUATION	AT	CR	J3.7I	EXERCISE INDICATOR IDENTITY	RX RX	2
	PLATFORM	AT	CR	J3.7C1 J3.7C4	ENVIRONMENT/CATEGORY PLATFORM	RX RX	3
	SUB LABEL	1	CR	J3.7I	SUBLABEL, J-SERIES	7	
	X COORDINATE	AT	CR	J3.7C2	LATITUDE, 0.0051 MINUTE LONGITUDE, 0.0051 MINUTE	RX RX	G9
	Y COORDINATE	AT	CR	J3.7C2	LATITUDE, 0.0051 MINUTE LONGITUDE, 0.0051 MINUTE	RX RX	G9
M.86B	LABEL	8	CR	J3.7I	LABEL, J-SERIES SUBLABEL, J-SERIES	3 7	
	TIME STALE	AT	CR	J3.7I	HOUR MINUTE SECOND	RX RX RX	4
	REPORT SOURCE	AT	CR	J3.7I	FIX OR BEARING DESCRIPTOR	RX	5
	BEARING ACCURACY	AT	CR	J3.7C1	BEARING ACCURACY	RX	6
	BEARING	AT	CR	J3.7C1	BEARING	RX	7
	BEARING INDICATOR	AT	CR	J3.7I	FIX OR BEARING DESCRIPTOR	RX	8
	LOCK-ON/SPY	0	None	NA	NA	NA	
	PLATFORM EVALUATION CONFIDENCE	RX	=	J3.7C1	PLATFORM EVALUATION CONFIDENCE	RX	

C-707

MIL-STD-6016B
APPENDIX C

TABLE C.5.2-M.6B-1. M.6B/M.86B Message Data Element Translation from the J3.7 Message (Sheet 2 of 6)

MESSAGE	Link 11/11B				Link 16		
	FIELD	TRANSLATION		WORD	DATA ELEMENT	VALUE	NOTES
		VALUE	REQUIRED				
M.86B (Cont'd)	FREQUENCY/FREQUENCY RANGE	AT	CR	J3.7C4	FREQUENCY/FREQUENCY RANGE INDICATOR	RX	G19
					FREQUENCY, 1	RX	
					FREQUENCY MULTIPLIER, 1	RX	
					FREQUENCY, 2	RX	
					FREQUENCY MULTIPLIER, 2	RX	
	FREQUENCY MULTIPLIER	AT	CR	J3.7C4	FREQUENCY/FREQUENCY RANGE INDICATOR	RX	G19
					FREQUENCY MULTIPLIER, 1	RX	
					FREQUENCY MULTIPLIER, 2	RX	
	BROAD CLASSIFICATION	0	None	NA	NA	NA	
	AMPLIFYING CHARACTERISTICS	0	None	NA	NA	NA	
	EMITTER NUMBER	AT	CR	J3.7C3	EMITTER NUMBER INDICATOR EMITTER NUMBER	1 RX	9 G15
	MODE NUMBER	RX	=	J3.7C4	MODE NUMBER	RX	
	CONFIDENCE	RX	=	J3.7C3	EMITTER CONFIDENCE	RX	
	EVALUATION SWITCH	AR	None	NA	NA	NA	10

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.6B-1. M.6B/M.86B Message Data Element Translation from the J3.7 Message (Sheet 3 of 6)

NOTES

1. Fix or Bearing is determined from the J3.7I Fix or Bearing Descriptor as follows:

Link 11/11B	Link 16
FIX OR BEARING	FIX OR BEARING DESCRIPTOR
0 - BEARING	2 - BEARING, TYPE NOT SPECIFIED
	3 - BEARING, ES
	5 - BEARING, RADIO DIRECTION FINDING
1 - FIX	7 - BEARING, UNKNOWN
	0 - EW FIX

Link 16 values 1, 4, and 6 will not be forwarded in this message.

2. When J3.7I Exercise Indicator = 1, Threat Evaluation shall be set to 2 regardless of J3.7I Identity. When J3.7I Exercise Indicator = 0, Threat Evaluation is determined from the J3.7I Identity field as follows:

Link 11/11B	Link 16
THREAT EVALUATION	IDENTITY
0 - PENDING	0 - PENDING
	5 - 7 UNDEFINED
1 - UNKNOWN	1 - UNKNOWN
2 - NONTHREAT/FRIEND	2 - ASSUMED FRIEND
	3 - FRIEND
	4 - NEUTRAL
3 - THREAT	5 - SUSPECT
	6 - HOSTILE

3. Platform is determined from the J3.7C1 Environment/Category and J3.7C4 Platform fields as follows:

Link 11/11B	Link 16
PLATFORM	ENVIRONMENT/CATEGORY
0 - NO STATEMENT	0 - NO STATEMENT/UNKNOWN
	6, 7 - UNDEFINED

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.6B-1. M.6B/M.86B Message Data Element Translation from the J3.7 Message (Sheet 4 of 6)

NOTES (Continued)

3. (Continued)

Link 11/11B PLATFORM	Link 16 ENVIRONMENT/CATEGORY	SPACE PLATFORM
2 - AIRBORNE (AIRCRAFT EXCLUDING MISSILE)	1 - SPACE	0-63
PLATFORM	ENVIRONMENT/CATEGORY	AIR PLATFORM
1 - MISSILE	2 - AIR	13, 37-39, 41-45
2 - AIRBORNE (AIRCRAFT EXCLUDING MISSILE)	2 - AIR	0-12, 14-35, 40, 46-63
6 - MISSILE CONTROL UNIT (AIRBORNE)	2 - AIR	36
PLATFORM	ENVIRONMENT/CATEGORY	SURFACE (MARITIME) PLATFORM
3 - SURFACE	3 - SURFACE (MARITIME)	0-32, 34-63
7 - MISSILE CONTROL UNIT (SURFACE/SUBSURFACE)	3 - SURFACE (MARITIME)	33
PLATFORM	ENVIRONMENT/CATEGORY	SUBSURFACE (MARITIME) PLATFORM
4 - SUBSURFACE (SUBMARINE)	4 - SUBSURFACE (MARITIME)	0-48, 50-63
7 - MISSILE CONTROL UNIT (SURFACE/SUBSURFACE)	4 - SUBSURFACE (MARITIME)	49
PLATFORM	ENVIRONMENT/CATEGORY	LAND (GROUND) PLATFORM
5 - LAND	5 - LAND (GROUND)	0-63

4. Time Stale is determined from the J3.7I Hour, Minute, and Second fields by subtracting Hour, Minute, and Second from the estimated time of transmission of the forwarded M.86B message and rounding to the nearest whole minute. If the result is greater than 29 minutes, translate to Time Stale = 30 (30 Minutes or More). If either Hour or Minute is received as No Statement, translate to Time Stale = 31 (Nonreal-Time Fix or Bearing).

5. Report Source is determined from the J3.7I Fix or Bearing Descriptor field as follows:

APPENDIX C

TABLE C.5.2-M.6B-1. M.6B/M.86B Message Data Element Translation from the J3.7 Message (Sheet 5 of 6)

NOTES (Continued)

5. (Continued)

Link 11/11B	Link 16
REPORT SOURCE	FIX OR BEARING DESCRIPTOR
0 - ES (OTHER THAN RDF)	0 - EW FIX
	2 - BEARING, TYPE NOT SPECIFIED
	3 - BEARING, ES
	7 - BEARING, UNKNOWN
1 - RDF	5 - BEARING, RADIO DIRECTION FINDING

Values 1, 4, and 6 in Link 16 will not be forwarded in this message.

6. Bearing Accuracy is determined as follows:

Link 11/11B	Link 16
BEARING ACCURACY	BEARING ACCURACY (NO STATEMENT)
0(NO STATEMENT)	0(NO STATEMENT)
1(< 2 DEGREES)	6(<= 2.0 DEGREES) THROUGH 15(<= 0.001 DEGREES)
2(< 10 DEGREES)	2(<= 10.0 DEGREES) THROUGH 5(<= 3.0 DEGREES)
3(= OR > 10 DEGREES)	1(> 10.0 DEGREES)

7. Link 16 Bearing is in 360/4096 degree increments, and Link 11/11B Bearing is in 360/512 degree increments. Translate Link 16 to the nearest Link 11/11B increment (.5 rounded up), except that a Link 16 Bearing greater than 359 19/64 shall be forwarded as a Link 11/11B Bearing of 359 19/64.

8. Bearing Indicator is determined from the J3.7I Fix or Bearing Descriptor as follows:

Link 11/11B	Link 16
BEARING INDICATOR	FIX OR BEARING DESCRIPTOR
0 - BEARING	2 - BEARING, TYPE NOT SPECIFIED
	3 - BEARING, ES
	5 - BEARING, RADIO DIRECTION FINDING
1 - BEARING UNKNOWN	0 - EW FIX
	7 - BEARING, UNKNOWN

APPENDIX C

TABLE C.5.2-M.6B-1. M.6B/M.86B Message Data Element Translation from the J3.7 Message (Sheet 6 of 6)

NOTES (Continued)

8. (Continued)

Link 16 values 1, 4, and 6 are not forwarded in this message.

9. When the J3.7 Emitter Number Indicator = 1, the Link 16 Emitter Number equates to the Link 11/11B Emitter Number. If the J3.7 Emitter Number Indicator = 0, the Link 16 Emitter Number field is not interpreted and cannot be forwarded.

10. When translating to Frequency/Frequency Range and Frequency Multiplier, set the Evaluation Switch to 0. When translating to Emitter Number, Mode Number, and Confidence, set the Evaluation Switch to 1. In order to forward all data received, two M.86B(EV SW=0 and EV SW=1) messages may have to be sent.

TABLE C.5.2-M.6B-2. M.6B/M.86B Message Data Element Translation from the J14.0 Message (Sheet 1 of 6)

Link 11/11B					Link 16		
MESSAGE	FIELD	VALUE	TRANSLATION		DATA ELEMENT	VALUE	NOTES
M.6B	LABEL	6	REQUIRED	WORD	LABEL, J-SERIES	14	
	TRACK NUMBER	AT	CR	J14.0I	TRACK NUMBER, REFERENCE	RX	G13
	FIX OR BEARING	AT	CR	J14.0I	FIX OR BEARING DESCRIPTOR	RX	1
	THREAT EVALUATION	AT	CR	J14.0I	THREAT EVALUATION	RX	2
	PLATFORM	AT	CR	J14.0I J14.0C5	ENVIRONMENT/CATEGORY PLATFORM	RX RX	3
	SUB LABEL	1	CR	J14.0I	SUBLABEL, J-SERIES	0	
	X COORDINATE	AT	CR	J14.0C2	LATITUDE, 0.0051 MINUTE LONGITUDE, 0.0051 MINUTE	RX RX	G9
	Y COORDINATE	AT	CR	J14.0C2	LATITUDE, 0.0051 MINUTE LONGITUDE, 0.0051 MINUTE	RX RX	G9
M.86B	LABEL	8	CR	J14.0I	LABEL, J-SERIES SUBLABEL, J-SERIES	14 0	
	TIME STALE	AT	CR	J14.0I	MINUTE HOUR SECOND	RX RX RX	4
	REPORT SOURCE	AT	CR	J14.0I	FIX OR BEARING DESCRIPTOR	RX	5
	BEARING ACCURACY	AT	CR	J14.0C1	BEARING ACCURACY	RX	6
	BEARING	AT	CR	J14.0C1	BEARING	RX	7
	BEARING INDICATOR	AT	CR	J14.0I	FIX OR BEARING DESCRIPTOR	RX	8
	LOCK-ON/SPY	RX	=	J14.0I	LOCK-ON	RX	
	PLATFORM EVALUATION CONFIDENCE	RX	=	J14.0C5	PLATFORM EVALUATION CONFIDENCE	RX	

C-713

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-M.6B-2. M.6B/M.86B Message Data Element Translation from the J14.0 Message (Sheet 2 of 6)

MESSAGE	Link 11/11B				Link 16		
	FIELD	TRANSLATION		WORD	DATA ELEMENT	VALUE	NOTES
		VALUE	REQUIRED				
M.86B (Cont'd)	FREQUENCY/FREQUENCY RANGE	AT	CR	J14.0E0	FREQUENCY/FREQUENCY RANGE INDICATOR	RX	G19
					FREQUENCY, 1	RX	
					FREQUENCY MULTIPLIER, 1	RX	
					FREQUENCY, 2	RX	
					FREQUENCY MULTIPLIER, 2	RX	
	FREQUENCY MULTIPLIER	AT	CR	J14.0E0	FREQUENCY/FREQUENCY RANGE INDICATOR	RX	G19
					FREQUENCY MULTIPLIER, 1	RX	
					FREQUENCY MULTIPLIER, 2	RX	
	BROAD CLASSIFICATION	RX	=	J14.0C3	BROAD CLASSIFICATION	RX	
	AMPLIFYING CHARACTERISTICS	RX	=	J14.0C3	AMPLIFYING CHARACTERISTICS	RX	
	EMITTER NUMBER	AT	CR	J14.0C3	EMITTER NUMBER INDICATOR	1	9, G15
					EMITTER NUMBER	RX	
	MODE NUMBER	RX	=	J14.0C3	MODE NUMBER	RX	
	CONFIDENCE	RX	=	J14.0C3	EMITTER CONFIDENCE	RX	
	EVALUATION SWITCH	AR	None	NA	NA	NA	10

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.6B-2. M.6B/M.86B Message Data Element Translation from the J14.0 Message (Sheet 3 of 6)

NOTES

1. Fix or Bearing is determined from the J14.0I Fix or Bearing Descriptor as follows:

Link 11/11B	Link 16
FIX OR BEARING	FIX OR BEARING DESCRIPTOR
0 - BEARING	2 - BEARING, TYPE NOT SPECIFIED
	3 - BEARING, ES
	5 - BEARING, RADIO DIRECTION FINDING
1 - FIX	7 - BEARING, UNKNOWN
	0 - EW FIX

Link 16 values 1, 4, and 6 will not be forwarded in this message.

2. Threat Evaluation is determined as follows:

Link 11/11B	Link 16
THREAT EVALUATION	THREAT EVALUATION
0 - PENDING	0 - PENDING/NO STATEMENT
	5-7 - UNDEFINED
1 - UNKNOWN	1 - UNKNOWN
2 - NONTHREAT/FRIEND	2 - NON-THREAT
	4 - FRIEND
3 - THREAT	3 - THREAT

3. Platform is determined from the J14.0I Environment/Category and J14.0C5 Platform fields as follows:

Link 11/11B	Link 16
PLATFORM	ENVIRONMENT/CATEGORY
0 - NO STATEMENT	0 - NO STATEMENT/UNKNOWN
	6, 7 - UNDEFINED

Link 11/11B	Link 16	
PLATFORM	ENVIRONMENT/CATEGORY	SPACE PLATFORM
2 - AIRBORNE (AIRCRAFT EXCLUDING MISSILE)	1 - SPACE	0-63

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.6B-2. M.6B/M.86B Message Data Element Translation from the J14.0 Message (Sheet 4 of 6)

NOTES (Continued)

3. (Continued)

Link 11/11B PLATFORM	Link 16 ENVIRONMENT/CATEGORY	AIR PLATFORM
1 - MISSILE	2 - AIR	13, 37-39, 41-45
2 - AIRBORNE (AIRCRAFT EXCLUDING MISSILE)	2 - AIR	0-12, 14-35, 40, 46-63
6 - MISSILE CONTROL UNIT (AIRBORNE)	2 - AIR	36
PLATFORM	ENVIRONMENT/CATEGORY	SURFACE (MARITIME) PLATFORM
3 - SURFACE	3 - SURFACE (MARITIME)	0-32, 34-63
7 - MISSILE CONTROL UNIT (SURFACE/ SUBSURFACE)	3 - SURFACE (MARITIME)	33
PLATFORM	ENVIRONMENT/CATEGORY	SUBSURFACE (MARITIME) PLATFORM
4 - SUBSURFACE (SUBMARINE)	4 - SUBSURFACE (MARITIME)	0-48, 50-63
7 - MISSILE CONTROL UNIT (SURFACE/ SUBSURFACE)	4 - SUBSURFACE (MARITIME)	49
PLATFORM	ENVIRONMENT/CATEGORY	LAND (GROUND) PLATFORM
5 - LAND	5 - LAND (GROUND)	0-63

4. Time Stale is determined from the J14.0I Hour, Minute, and Second fields by subtracting the Hour, Minute, and Second fields from the estimated time of transmission of the forwarded M.86B message, then rounding to the nearest whole minute. If the result is greater than 29 minutes, translate to Time Stale = 30 (30 Minutes or More). If either Hour or Minute is received as No Statement, translate to Time Stale = 31 (Nonreal-Time Fix or Bearing).

5. Report Source is determined from the J14.0I Fix or Bearing Descriptor field as follows:

Link 11/11B REPORT SOURCE	Link 16 FIX OR BEARING DESCRIPTOR
0 - ES (OTHER THAN RDF)	0 - EW FIX
	2 - BEARING, TYPE NOT SPECIFIED
	3 - BEARING, ES
	7 - BEARING, UNKNOWN

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.6B-2. M.6B/M.86B Message Data Element Translation from the J14.0 Message (Sheet 5 of 6)

NOTES (Continued)

5. (Continued)

Link 11/11B	Link 16
REPORT SOURCE	FIX OR BEARING DESCRIPTOR
1 - RDF	5 - BEARING, RADIO DIRECTION FINDING

6. Bearing Accuracy is determined as follows:

Link 11/11B	Link 16
BEARING ACCURACY	BEARING ACCURACY (NO STATEMENT)
0(NO STATEMENT)	0(NO STATEMENT)
1(< 2 DEGREES)	6(<= 2.0 DEGREES) THROUGH 15(<= 0.001 DEGREES)
2(< 10 DEGREES)	2(<= 10.0 DEGREES) THROUGH 5(<= 3.0 DEGREES)
3(= OR > 10 DEGREES)	1(> 10.0 DEGREES)

7. Link 16 Bearing is in 360/4096 degree increments, and Link 11/11B Bearing is in 360/512 degree increments. Translate Link 16 to the nearest Link 11/11B increment (.5 rounded up), except that a Link 16 Bearing greater than 359 19/64 shall be forwarded as a Link 11/11B Bearing of 359 19/64.

8. The Bearing Indicator is determined from the J14.0I Fix or Bearing Descriptor as follows:

Link 11/11B	Link 16
BEARING INDICATOR	FIX OR BEARING DESCRIPTOR
0 - BEARING	2 - BEARING, TYPE NOT SPECIFIED
	3 - BEARING, ES
	5 - BEARING, RADIO DIRECTION FINDING
1 - BEARING UNKNOWN	0 - EW FIX
	7 - BEARING, UNKNOWN

9. When the J14.0 Emitter Number Indicator = 1, the Link 16 Emitter Number equates to the Link 11/11B Emitter Number. If the J14.0 Emitter Number Indicator $\neq$ 1, the Link 16 Emitter Number field is not interpreted and cannot be forwarded.

APPENDIX C

TABLE C.5.2-M.6B-2. M.6B/M.86B Message Data Element Translation from the
J14.0 Message (Sheet 6 of 6)

NOTES (Continued)

10. When translating to Frequency/Frequency Range, Frequency Multiplier, Broad Classification, and Amplifying Characteristics, set the Evaluation Switch to 0. When translating to Emitter Number, Mode Number, and Confidence, set the Evaluation Switch to 1. In order to forward all data received, two M.86B(EV SW=0 and EV SW=1) messages may have to be sent.

C-719

APPENDIX C

APPENDIX C

TABLE C.5.2-M.6C. M.6C/M.86C Message Data Element Translation from Link 16
(Sheet 2 of 2)

NOTES

1. Not Used
2. When J14.0C4 PRF/PRI Indicator is set to 0 (PRF Being Reported), Pulse Repetition Frequency (PRF) is forwarded as shown below. When PRF/PRI Indicator is set to 1 (PRI Being Reported), it must be converted to PRF. The inverse of Pulse Repetition Interval (PRI) ($1/PRI$) = PRF. This value (derived from PRF or inverse of PRI) is rounded to the nearest 0.1 Pulses Per Second (PPS) if < 13107.15 PPS or the nearest whole PPS if ≥ 13107.15 , and is forwarded as shown below.

Link 11/11B		Link 16
PULSE REPETITION		PULSE REPETITION
FREQUENCY	PRF SCALING	FREQUENCY
0 - NO STATEMENT	0	0 - NO STATEMENT
1-131071	1 - .1 PULSES/SECOND	0.1 - 13107.1
13107 - 131070	0 - 1 PULSE/SECOND	13107.2 - 131070.4
131071	0 - 1 PULSE/SECOND	≥ 131070.5

3. Link 16 Pulse Width is in .05 microsecond increments, and Link 11/11B Pulse Width is in .1 microsecond increments. Translate Link 16 to the nearest Link 11/11B increment (.5 rounded up).

4. When the J14.0C4 Antenna Scan Rate/Period Indicator (ASP IND) is set to 0 (No Statement), the M.86C Antenna Scan Period field shall be set to 0 (No Statement), and the M.86C Switch shall be set to 0. When ASP IND = 1 or 2, the Switch field is determined from the J14.0C4 ASP IND field as follows:

Link 11/11B	Link 16
SWITCH	ANTENNA SCAN RATE/PERIOD INDICATOR
0 - ANTENNA SCAN PERIOD REPORTED	2 - ANTENNA SCAN PERIOD BEING REPORTED
1 - SCAN RATE REPORTED	1 - PRIMARY ANTENNA SCAN RATE BEING REPORTED

TABLE C.5.2-M.6D. M.6D/M.86D Message Data Element Translation from Link 16 (Sheet 1 of 7)

Link 11/11B					Link 16		
MESSAGE	FIELD	VALUE	TRANSLATION		DATA ELEMENT	VALUE	NOTES
M.6D	LABEL	6	REQUIRED	WORD	LABEL, J-SERIES	14	
	TRACK NUMBER	AT	CR	J14.2I	TRACK NUMBER, REFERENCE	RX	1, G13
	CONTROL	AT	CR	J14.2I	ELECTRONIC WARFARE ACTION VALUE	RX	2
	RECEIPT/COMPLIANCE	AT	CR	J14.2I	RECEIPT/COMPLIANCE	RX	3
	EWC INDICATOR	RX	=	J14.2I	ELECTRONIC WARFARE ACTION VALUE	7-12	4
				J14.2E0	ELECTRONIC WARFARE COORDINATOR INDICATOR	RX	
	SUB LABEL	3	CR	J14.2I	SUBLABEL, J-SERIES	2	
	PERIOD	RX	=	J14.2I	ELECTRONIC WARFARE ACTION VALUE	0	
				J14.2E0	PERIODICITY OF REPORT	RX	
	TN ADDRESSEE	AT	CR	J14.2I	TRACK NUMBER, ADDRESSEE	RX	5, G12
	FREQUENCY/FREQUENCY RANGE	AT	CR	J14.2I	ELECTRONIC WARFARE ACTION VALUE	4	
				J14.2C4	FREQUENCY/FREQUENCY RANGE INDICATOR	RX	G19
					FREQUENCY, 1	RX	
					FREQUENCY MULTIPLIER, 1	RX	
					FREQUENCY, 2	RX	
					FREQUENCY MULTIPLIER, 2	RX	
	FREQUENCY MULTIPLIER	AT	CR	J14.2I	ELECTRONIC WARFARE ACTION VALUE	4	
				J14.2C4	FREQUENCY/FREQUENCY RANGE INDICATOR	RX	G19
					FREQUENCY MULTIPLIER, 1	RX	
					FREQUENCY MULTIPLIER, 2	RX	
	REFERENCED CONTROL VALUE	AT	CR	J14.2I	ELECTRONIC WARFARE ACTION VALUE	5, 6, 12	
				J14.2E0	REFERENCE ELECTRONIC WARFARE ACTION VALUE	RX	6

C-721

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-M.6D. M.6D/M.86D Message Data Element Translation from Link 16 (Sheet 2 of 7)

MESSAGE	Link 11/11B		TRANSLATION		Link 16		NOTES
	FIELD	VALUE	REQUIRED	WORD	DATA ELEMENT	VALUE	
M.6D (Cont'd)	EMITTER NUMBER	AT	CR	J14.2I	ELECTRONIC WARFARE ACTION VALUE	7	7
				J14.2C3	EMITTER NUMBER INDICATOR EMITTER NUMBER	1 RX	G15
	MODE NUMBER	RX	=	J14.2I	ELECTRONIC WARFARE ACTION VALUE	7	
				J14.2C3	MODE NUMBER	RX	
	CONFIDENCE	RX	=	J14.2I	ELECTRONIC WARFARE ACTION VALUE	7	
				J14.2C3	EMITTER CONFIDENCE	RX	
	MULTIPLE EVALUATION	0	None	NA	NA	NA	
	ASSOCIATED TN	AT	CR	J14.2I	ELECTRONIC WARFARE ACTION VALUE	8 or 9	
				J14.2E0	TRACK NUMBER, ASSOCIATED	RX	G13
	CANCELED CONTROL VALUE	AT	CR	J14.2I	ELECTRONIC WARFARE ACTION VALUE	11	
				J14.2E0	REFERENCE ELECTRONIC WARFARE ACTION VALUE	RX	6
	RESPONSE TRACK NUMBER	AT	CR	J14.2I	ELECTRONIC WARFARE ACTION VALUE	12	
					TRACK NUMBER, REFERENCE	RX	G13
	BEARING	AT	=	J14.2I	ELECTRONIC WARFARE ACTION VALUE	14	
				J14.2C1	BEARING	RX	
	REPORT DURATION	AT	CR	J14.2I	ELECTRONIC WARFARE ACTION VALUE	13 or 14	
				J14.2E0	TIME DURATION	RX	9
	BEARING WIDTH	AT	CR	J14.2I	ELECTRONIC WARFARE ACTION VALUE	13 or 14	
				J14.2C1	SECTOR WIDTH	RX	10
M.86D	LABEL	8	CR	J14.2I	ELECTRONIC WARFARE ACTION VALUE	4	

C-722

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-M.6D. M.6D/M.86D Message Data Element Translation from Link 16 (Sheet 3 of 7)

Link 11/11B				Link 16			
<u>MESSAGE</u> M.86D (Cont'd)	<u>FIELD</u> BEARING	<u>VALUE</u>	TRANSLATION	<u>WORD</u>	<u>DATA ELEMENT</u> BEARING	<u>VALUE</u>	<u>NOTES</u>
		RX	=	J14.2C1		RX	
	SECTOR WIDTH	RX	=	J14.2C1	SECTOR WIDTH	RX	
	EMITTER NUMBER	AT	CR	J14.2C3	EMITTER NUMBER INDICATOR EMITTER NUMBER	1 RX	7
	EMITTER FUNCTION	RX	=	J14.2C3	EMITTER FUNCTION	RX	

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.6D. M.6D/M.86D Message Data Element Translation from Link 16
(Sheet 4 of 7)

NOTES

1. When J14.2I EW Action Value (EWAC) = 12, Track Number, Reference translates to M.6D Response Track Number and M.6D Track Number shall be set to 0000. When J14.2I EWAC = 14, Track Number, Reference is not used and M.6D Track Number shall be set to 0000. For all other EWACs, M.6D Track Number is translated from J14.2I TN, Reference.

2. Control is determined from the J14.2I EWAC as follows:

Link 11	Link 16
CONTROL	ELECTRONIC WARFARE ACTION VALUE
0 - REQUEST PERIODIC REPORT	0 - REQUEST PERIODIC REPORT
1 - REQUEST AUTOMATIC EVALUATION	1 - REQUEST AUTOMATIC EVALUATION
2 - REQUEST MANUAL EVALUATION	2 - REQUEST MANUAL EVALUATION
3 - REQUEST UPDATE THEN WATCH	3 - REQUEST UPDATE AND WATCH
4 - REQUEST DIRECTED SEARCH	4 - REQUEST DIRECTED SEARCH (WITHOUT EITHER J14.2C1 OR J14.2C3 WORD)
5 - REQUEST DIRECTED SECTOR SEARCH	4 - REQUEST DIRECTED SEARCH (WITH J14.2C1 OR J14.2C3 WORD)
7 - CANCEL REQUEST/CEASE REPORT	5 - CANCEL REQUEST
	6 - CEASE REPORT
8 - EMITTER EVALUATION	7 - EMITTER EVALUATION
9 - PARAMETER ASSOCIATION	8 - PARAMETER ASSOCIATION
10 - EMITTER ASSOCIATION	9 - EMITTER ASSOCIATION
11 - DISASSOCIATION	10 - DISASSOCIATION
12 - NO FIND	11 - NO FIND
13 - RESPONSE TO EW REQUEST	12 - RESPONSE TO AN ELECTRONIC WARFARE REQUEST
14 - EVALUATE TRACK	13 - EVALUATE TRACK
15 - EVALUATE SECTOR	14 - EVALUATE SECTOR

3. When J14.2I EWAC = 7-12, the M.6D has no Receipt/Compliance (R/C) field. When J14.2I EWAC = 0-6, 13, or 14, Receipt/Compliance is determined as follows:

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.6D. M.6D/M.86D Message Data Element Translation from Link 16
(Sheet 5 of 7)

NOTES (Continued)

3. (Continued)

Link 11/11B	Link 16
RECEIPT/COMPLIANCE	RECEIPT/COMPLIANCE
0 - ORIGINAL ORDER - RECEIPT/COMPLIANCE REQUIRED	0 - ORIGINAL ORDER
1 - ORIGINAL ORDER - NO RECEIPT/COMPLIANCE REQUIRED	1 - ORIGINAL ORDER
3 - CANTCO	6 - CANTCO (CANNOT COMPLY)
	7-14 - CANTPRO (CANNOT PROCESS)
	16-21 - CANTPRO (CANNOT PROCESS)

4. When J14.2I EWAC = 0-6, 13, or 14, the M.6D has no EWC Indicator field. When J14.2I EWAC = 7-12, the J14.2 EWC Indicator equates to the M.6D EWC Indicator.

5. When J14.2I EWAC = 7-10, the M.6D has no TN, Addressee. The J14.2 (EWAC = 7-10) shall be translated and forwarded to Link 11/11B as M.6D(Control=8-11) if the J14.2 TN, Addressee = 00177 (octal) or an active PU/RU for whom data are being forwarded by this FJU.

6. Referenced Control Value or Canceled Control Value is determined from J14.2E0 Reference EWAC as follows:

Link 11/11B	Link 16
CONTROL	ELECTRONIC WARFARE ACTION VALUE
0 - REQUEST PERIODIC REPORT	0 - REQUEST PERIODIC REPORT
1 - REQUEST AUTOMATIC EVALUATION	1 - REQUEST AUTOMATIC EVALUATION
2 - REQUEST MANUAL EVALUATION	2 - REQUEST MANUAL EVALUATION
3 - REQUEST UPDATE THEN WATCH	3 - REQUEST UPDATE AND WATCH
4 - REQUEST DIRECTED SEARCH	4 - REQUEST DIRECTED SEARCH (WITHOUT EITHER J14.2C1 OR J14.2C3 WORD)
5 - REQUEST DIRECTED SECTOR SEARCH	4 - REQUEST DIRECTED SEARCH (WITH J14.2C1 OR J14.2C3 WORD)
14 - EVALUATE TRACK	13 - EVALUATE TRACK
15 - EVALUATE SECTOR	14 - EVALUATE SECTOR

7. When the J14.2C3 Emitter Number Indicator = 1, the Link 16 Emitter Number equates to the Link 11/11B Emitter Number. If the J14.2C3 Emitter Number

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.6D. M.6D/M.86D Message Data Element Translation from Link 16
(Sheet 6 of 7)

NOTES (Continued)

7. (Continued)

Indicator $\neq$ 1, the Link 16 Emitter Number field is not interpreted and cannot be forwarded.

8. Not Used.

9. Report Duration is determined from J14.2E0 Time Duration as follows:

<u>Link 11/11B</u>	<u>Link 16</u>
<u>REPORT DURATION</u>	<u>TIME DURATION (NO STATEMENT)</u>
0(ONE REPORT REGARDLESS OF TIME)	0(NO STATEMENT)
	1(1 SECOND)
	2(2 SECONDS)
	3(3 SECONDS)
	4(4 SECONDS)
	5(5 SECONDS)
	6(10 SECONDS)
	7(15 SECONDS)
	8(20 SECONDS)
	9(25 SECONDS)
	10(30 SECONDS)
	11(UNDEFINED)
1(1 MINUTE)	12(1 MINUTE)
2(5 MINUTES)	13(5 MINUTES)
3(20 MINUTES)	14(20 MINUTES)
	15(30 MINUTES)

10. Link 16 Sector Width is defined as the number of degrees on each side of the specified bearing, whereas Link 11/11B Bearing Width is defined as the total width of the sector centered on the specified bearing. Therefore, Link 11/11B Bearing Width is double the Link 16 Sector Width, and Bearing Width is determined from J14.2C1 Sector Width as follows:

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.6D. M.6D/M.86D Message Data Element Translation from Link 16
(Sheet 7 of 7)

NOTES (Continued)

10. (Continued)

Link 11/11B	Link 16
BEARING WIDTH	SECTOR WIDTH
0(5 DEGREES)	0-2 (0-2 DEGREES)
1(10 DEGREES)	3-5 (3-5 DEGREES)
2(20 DEGREES)	6-10 (6-10 DEGREES)
3(30 DEGREES)	11-15 (11-15 DEGREES)
4(45 DEGREES)	16-22 (16-22 DEGREES)
5(90 DEGREES)	23-45 (23-45 DEGREES)
6(180 DEGREES)	46-90 (46-90 DEGREES)
7(360 DEGREES)	91-180 (91-180 DEGREES)
	255(NO STATEMENT)

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-M.9A-1. M.9A(AC=0) Message Data Element Translation from Link 16 (Sheet 1 of 2)

Link 11/11B					Link 16		
MESSAGE	FIELD	VALUE	TRANSLATION		DATA ELEMENT	VALUE	NOTES
M.9A	LABEL	9	REQUIRED	WORD	NA	NA	1
	SUBLABEL	0	None	NA	NA	NA	
	ACTION	0	None	NA	NA	NA	
	ENVIRONMENT/CATEGORY	0	None	NA	NA	NA	
	ACKNOWLEDGE INDICATOR	0	None	NA	NA	NA	
	SIMULATION INDICATOR	AT	CR	J2.xI or J3.xI or J5.4I or J14.0I	SIMULATION INDICATOR	RX	5,G6
	TRACK NUMBER	AT	CR	HEADER or J3.xI or J5.4I or J14.0I	TRACK NUMBER, SOURCE TRACK NUMBER, REFERENCE	RX RX	2,G13
	PU/RU ADDRESS/SOURCE	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	3,G12
	SPECIAL PROCESSING INDICATOR	RX	=	J2.x or J3.xI or J5.4I or J14.0I	SPECIAL PROCESSING INDICATOR	RX	4,G5

APPENDIX C

TABLE C.5.2-M.9A-1. M.9A(AC=0) Message Data Element Translation from Link 16
(Sheet 2 of 2)

NOTES

1. M.9A(AC=0) shall be transmitted on Link 11B as a part of the initial sequence for the following messages: M.2/M.82, M.3/M.83, M.4A/M.84, M.5, and M.6A.
2. The Track Number of the M.9A(AC=0) message is derived from the Track Number, Source in the Link 16 Header message for units reported in J2.x messages, or and from the Track Number, Reference in J3.x, J5.4, and J14.0 messages.
3. The PU/RU Address/Source of the M.9A(AC=0) message shall always be the source of the data being forwarded.
4. The Special Processing Indicator of the M.9A(AC=0) shall always be set to 0 when identifying the data source for the C² unit's positional data received in a J2.x message.
5. The Simulation Indicator of the M.9A(AC=0) shall always be set to value 0, when forwarding J14.0 messages. Otherwise, the Simulation Indicator is translated as received in the J2.x, J3.x, or J5.4 message.

TABLE C.5.2-M.9A-2. M.9A(AC=1) Message Data Element Translation from the J3.2/J3.3 Message (Sheet 1 of 2)

MESSAGE M.9A	Link 11/11B			Link 16		
	FIELD LABEL	VALUE 9	TRANSLATION REQUIRED CR	WORD J3.xI	DATA ELEMENT LABEL, J-SERIES	VALUE 3 NOTES
	SUBLABEL	0	CR	J3.xI	SUBLABEL, J-SERIES	2 or 3
	ACTION	1	CR	J3.xI	IDENTITY DIFFERENCE INDICATOR	RX 1
	ENVIRONMENT/CATEGORY	AT	CR	J3.xI	SUBLABEL, J-SERIES	2 or 3 2
	IDENTITY	AT	CR	(See note 4)		
	PRIMARY IDENTITY AMPLIFICATION	AT	CR	(See Note 4)		
	IDENTITY AMPLIFICATION	AT	CR	(See Note 4)		
	TRACK NUMBER	AT	CR	J3.xI	TRACK NUMBER, REFERENCE	RX G13
	PU/RU ADDRESS/SOURCE	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX 3, G12
	CONFLICT INDICATOR	RX	=	J3.xI	IDENTITY DIFFERENCE INDICATOR	RX 1

APPENDIX C

TABLE C.5.2-M.9A-2. M.9A(AC=1) Message Data Element Translation from the J3.2/J3.3 Message (Sheet 2 of 2)

NOTES

1. The M.9A(AC=1, CI=1) is translated when the J3.2 or J3.3 message with Identity Difference Indicator set to value 1 is forwarded. The M.9A(AC=1, CI=0) is translated when the Identity Difference Indicator has changed from value 1 to value 0 in the J3.2 or J3.3 message being forwarded.

2. The M.9A(AC=1) Environment/Category is determined from the Link 16 Sublabel as follows:

<u>Link 11/11B</u>	<u>Link 16</u>
<u>ENVIRONMENT/CATEGORY</u>	<u>SUBLABEL, J-SERIES</u>
1 - AIR	2 - AIR
2 - SURFACE	3 - SURFACE

3. The PU/RU Address/Source of an M.9A(AC=1) message being forwarded onto Link 11/11B shall always be the source of the data being forwarded.

4. The M.9A(AC=1, CI=0) Identity, Primary Identity Amplification, and Identity Amplification fields shall be translated from the J3.2 or J.3.3 Exercise Indicator, Identity, Platform, and Platform Activity fields in accordance with General Notes 20 and 21. The same fields in the M.9A(AC=1, CI=1) shall be transmitted from the FJU's database in accordance with the Data Retention Rules for M.9A and J7.0 translation trees.

TABLE C.5.2-M.9A-3. M.9A(AC=1 OR 2) Message Data Element Translation from the J7.0 Message (Sheet 1 of 2)

MESSAGE M.9A	Link 11/11B	TRANSLATION			Link 16	VALUE 7	NOTES
	FIELD LABEL	VALUE 9	REQUIRED CR	WORD J7.0I	DATA ELEMENT LABEL, J-SERIES		
	SUBLABEL	0	CR	J7.0I	SUBLABEL, J-SERIES	0	
	ACTION	1 or 2	=	J7.0I	ACTION, TRACK MANAGEMENT	1 or 2	
	ENVIRONMENT/CATEGORY	AT	CR	J7.0I	ENVIRONMENT/CATEGORY	RX	1
	IDENTITY	AT	CR	J7.0I	IDENTITY	RX	G20, G21
	PRIMARY IDENTITY AMPLIFICATION	AT	CR	J7.0I	IDENTITY	RX	G20, G21
					PLATFORM PLATFORM ACTIVITY	RX RX	
	IDENTITY AMPLIFICATION	AT	CR	J7.0I	IDENTITY	RX	G20, G21
					PLATFORM PLATFORM ACTIVITY	RX RX	
	TRACK NUMBER	AT	CR	J7.0I	TRACK NUMBER, REFERENCE	RX	G13
	PU/RU ADDRESS/SOURCE	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	2, G12
	CONFLICT INDICATOR	0	None	NA	NA	NA	3

C-733

APPENDIX C

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.9A-3. M.9A(AC=1 OR 2) Message Data Element Translation from
the J7.0 Message (Sheet 2 of 2)

NOTES

1. Environment/Category and Environment/Category equivalence:

<u>Link 11/11B</u>	<u>Link 16</u>
<u>ENVIRONMENT/CATEGORY</u>	<u>ENVIRONMENT/CATEGORY</u>
1	2
2	3

2. The PU/RU Address/Source of an M.9A(AC=1 or 2) message being forwarded onto Link 11/11B shall always be the source of the data being forwarded.
3. The M.9A(AC=2) message does not contain Conflict Indicator.

TABLE C.5.2-M.9A-4. M.9A(AC=3) Message Data Element Translation from the J7.1 Message (Sheet 1 of 2)

Link 11/11B				Link 16			
MESSAGE	FIELD	TRANSLATION			DATA ELEMENT	VALUE	NOTES
M.9A	LABEL	9	REQUIRED	WORD	LABEL, J-SERIES	7	
	SUBLABEL	0	CR	J7.1I	SUBLABEL, J-SERIES	1	
	ACTION	3	None	NA	NA	NA	
	TRACK NUMBER	0	CR	J7.1I	TRACK NUMBER, REFERENCE	0	1
	PU/RU ADDRESS/SOURCE	AT	CR	J7.1I or J7.1C1	TRACK NUMBER, ADDRESSEE 1	RX	2, G12
					TRACK NUMBER, ADDRESSEE 2	RX	2, G12
					TRACK NUMBER, ADDRESSEE 3	RX	2, G12
					TRACK NUMBER, ADDRESSEE 4	RX	2, G12
					TRACK NUMBER, ADDRESSEE 5	RX	2, G12
	STATUS INDICATOR	1	None	NA	NA	NA	

APPENDIX C

TABLE C.5.2-M.9A-4. M.9A(AC=3) Message Data Element Translation from the
J7.1 Message (Sheet 2 of 2)

NOTES

1. The J7.1I (Track Number, Reference = 0) message is the only case that is forwarded.
2. A separate M.9A(AC=3) will be forwarded for each addressee.

TABLE C.5.2-M.9A-5. M.9A(AC=4) Message Data Element Translation from Link 16 (Sheet 1 of 2)

Link 11/11B		TRANSLATION			Link 16		
MESSAGE	FIELD	VALUE	REQUIRED	WORD	DATA ELEMENT	VALUE	NOTES
M.9A	LABEL	9	CR	(See Note 1)	NETWORK PARTICIPATION STATUS INDICATOR	RX	1
	SUBLABEL	0	CR	(See Note 1)	NETWORK PARTICIPATION STATUS INDICATOR	RX	1
	ACTION	4	CR	(See Note 1)	NETWORK PARTICIPATION STATUS INDICATOR	RX	1
	TRACK NUMBER	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	2, G13
	PU/RU ADDRESS/SOURCE	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	2, 3, G12

APPENDIX C

TABLE C.5.2-M.9A-5. M.9A(AC=4) Message Data Element Translation from Link 16
(Sheet 2 of 2)

NOTES

1. The M.9A(AC=4) Drop Track Report is translated from the J2.2I, J2.3I, J2.4I, J2.5I, or J2.6I when the Network Participation Status Indicator is set to a value other than 1, 4, or 5; or the M.9A(AC=4) Drop Track Report is generated by the FJU for an active unit if a J2 series message has not been received from that unit for 60 seconds. (See paragraph C.4.4.7)
2. If the M.9A(AC=4) Drop Track Report is being generated because a J2 series message has not been received based on Note 1, the Track Number, Source is provided for the unit from the FJU database.
3. The PU/RU Address/Source of the M.9A(AC=4) Drop Track shall always be the source of the Data being forwarded.

TABLE C.5.2-M.9A-6. M.9A(AC=4) Message Data Element Translation from the J7.0 Message (Sheet 1 of 2)

Link 11/11B					Link 16		
MESSAGE	FIELD	VALUE	TRANSLATION		DATA ELEMENT	VALUE	NOTES
M.9A	LABEL	9	CR	J7.0I	LABEL, J-SERIES	7	
	SUBLABEL	0	CR	J7.0I	SUBLABEL, J-SERIES	0	
	ACTION	4	CR	J7.0I	ACTION, TRACK MANAGEMENT	0	
	TRACK NUMBER	AT	CR	J7.0I	TRACK NUMBER, REFERENCE	RX	G13
	PU/RU ADDRESS/SOURCE	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	1, G12

APPENDIX C

TABLE C.5.2-M.9A-6. M.9A(AC=4) Message Data Element Translation from the
J7.0 Message (Sheet 2 of 2)

NOTES

1. The PU/RU Address/Source of an M.9A(AC=4) message shall always be the source of the data being forwarded.

TABLE C.5.2-M.9A-7. M.9A(AC=5 OR 7) Message Data Element Translation from the J2.x/J3.x Message (Sheet
1 of 4)

MESSAGE M.9A	Link 11/11B			Link 16			
	FIELD LABEL	VALUE 9	TRANSLATION REQUIRED None	WORD NA	DATA ELEMENT NA	VALUE NA	NOTES
	SUBLABEL	0	None	NA	NA	NA	
	ACTION	AT	CR	J2.xI or J3.xI	FORCE TELL INDICATOR EMERGENCY INDICATOR FORCE TELL INDICATOR EMERGENCY INDICATOR	RX RX RX RX	1 1
	ENVIRONMENT/CATEGORY	AT	CR	J2.xI or J3.xI	(See Note 2)	RX	2
	TRACK NUMBER	AT	CR	HEADER or J3.xI	TRACK NUMBER, SOURCE TRACK NUMBER, REFERENCE	RX RX	3, G13
	PU/RU ADDRESS/SOURCE	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	4, G12
	STATUS INDICATOR	AT	CR	J2.xI or J3.xI	FORCE TELL INDICATOR EMERGENCY INDICATOR FORCE TELL INDICATOR EXERCISE INDICATOR	RX RX RX RX	1 1

C-741

APPENDIX C

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.9A-7. M.9A(AC=5 OR 7) Message Data Element Translation from the J2.x/J3.x Message (Sheet 2 of 4)

NOTES

1. The proper setting of the M.9A Action and Status Indicator fields is determined by comparing the Force Tell and Emergency status previously reported for the track on Link 11/11B with the status of the track currently reported in the PPLI or Surveillance message being forwarded. When the FT, EMG, or both being reported in the PPLI or Surveillance messages do not change, the appropriate M.9A(AC=5) Track Alert Report shall continue to be transmitted immediately preceding each Track Position and Track Position Amplify message pair. The proper setting for the forwarded M.9A Action and Status Indicator fields are as follows:

Previous J2.x or J3.x

Force Tell and	FT=0	FT=0	FT=0	FT=0	FT=1	FT=1	FT=1	FT=1
Emergency Setting	EMG=0	EMG=0	EMG=0	EMG=0	EMG=0	EMG=0	EMG=0	EMG=0

Current J2.x or J3.x

Force Tell and	FT=0	FT=1	FT=0	FT=1	FT=0	FT=1	FT=0	FT=1
Emergency Setting	EMG=0	EMG=0	EMG=1	EMG=1	EMG=0	EMG=0	EMG=1	EMG=1

M.9A AC=5, STI=0			X	X ¹			X	X ¹
M.9A AC=5, STI=1		X				X		
M.9A AC=7, STI=0								
M.9A AC=7, STI=1					X		X	

Previous J2.x or J3.x

Force Tell and	FT=0	FT=0	FT=0	FT=0	FT=1	FT=1	FT=1	FT=1
Emergency Setting	EMG=1	EMG=1	EMG=1	EMG=1	EMG=1	EMG=1	EMG=1	EMG=1

Current J2.x or J3.x

Force Tell and	FT=0	FT=1	FT=0	FT=1	FT=0	FT=1	FT=0	FT=1
Emergency Setting	EMG=0	EMG=0	EMG=1	EMG=1	EMG=0	EMG=0	EMG=1	EMG=1

M.9A AC=5, STI=0			X	X ¹			X	X ¹
M.9A AC=5, STI=1		X				X ³		
M.9A AC=7, STI=0	X	X			X	X		
M.9A AC=7, STI=1					X ²		X ²	

APPENDIX C

TABLE C.5.2-M.9A-7. M.9A(AC=5 OR 7) Message Data Element Translation from the J2.x/J3.x Message (Sheet 3 of 4)

NOTES (Continued)

1. (Continued)

¹ Only the Emergency status will be reported on the interface when both Emergency and Force Tell status exist, but the Force Tell status must be maintained in the FJU database.

² The M.9A(AC=7, STI=1) is required for transmission on the interface only if the Force Tell alert had previously been reported.

³ Force Tell Alert transmitted if it has not been previously reported.

2. The Environment/Category field will be set only when forwarding the M.9A(AC=5) message as follows:

<u>Link 11/11B</u>	<u>Link 16</u>
<u>Environment/Category</u>	<u>Message Data Element</u>
0 - No Statement	J2.x/Sublabel = 5, or 6. J3.x/Sublabel = 1, or 5.
1 - Air	J2.0/Originator Environment/Category = 3 J2.x/Sublabel = 2 J3.x/Sublabel = 2
2 - Surface	J2.0/Originator Environment/Category = 0 J2.x/Sublabel = 3 J3.x/Sublabel = 3
3 - Subsurface	J2.0/Originator Environment/Category = 1 J2.x/Sublabel = 4 J3.x/Sublabel = 4
4 - Special Point	J2.0/Originator Environment/Category = 2 J3.x/Sublabel = 0
5 - EW Bearings and Fixes	J3.7/Sublabel = 7

APPENDIX C

TABLE C.5.2-M.9A-7. M.9A(AC=5 OR 7) Message Data Element Translation from
the J2.x/J3.x Message (Sheet 4 of 4)

NOTES (Continued)

3. The Track Number Of the M.9A(AC=5 or7) message is derived from the Track Number, Source in the Link 16 Header message for units reported in J2.x messages, or from Track Number Reference in J3.x messages.

4. The PU/RU Address/Source of the M.9A(AC=5 or 7) message shall always be the source of the data being forwarded.

TABLE C.5.2-M.9A-8. M.9A(AC=5) Message Data Element Translation from the J7.0 Message (Sheet 1 of 2)

Link 11/11B				Link 16		
MESSAGE	FIELD	TRANSLATION		DATA ELEMENT	VALUE	NOTES
M.9A	LABEL	9	CR	J7.0I	7	
	SUBLABEL	0	CR	J7.0I	0	
	ACTION	5	CR	J7.0I	3 or 4 1	
	ENVIRONMENT/CATEGORY	0	=	J7.0I	0	
	TRACK NUMBER	AT	CR	J7.0I	RX	G13
	PU/RU ADDRESS/SOURCE	AT	CR	HEADER	RX	1,G12
	STATUS INDICATOR	AT	CR	J7.0I	3 or 4	2

APPENDIX C

TABLE C.5.2-M.9A-8. M.9A(AC=5) Message Data Element Translation from the J7.0 Message (Sheet 2 of 2)

NOTES

1. The PU/RU Address/Source of the M.9A(AC=5 or 7) message shall always be the source of the data being forwarded.

2. The STI field is determined as follows:

Link 11/11B

STATUS INDICATOR

0 - EMERGENCY ALERT

1 - FORCE TELL ALERT

Link 16

ACTION, TRACK MANAGEMENT

3

4

TABLE C.5.2-M.9A-9. M.9A(AC=6) Message Data Element Translation from the J7.0(ACT=1) Message (Sheet 1 of 2)

Link 11/11B					Link 16		
MESSAGE	FIELD	VALUE	TRANSLATION		DATA ELEMENT	VALUE	NOTES
M.9A(AC=6)	LABEL	9	REQUIRED	WORD	LABEL, J-SERIES	7	
	SUBLABEL	0	CR	J7.0I	SUBLABEL, J-SERIES	0	1
	ACTION	6	CR	J7.0I	ACTION, TRACK MANAGEMENT CONTROLLING UNIT INDICATOR	1 1	1
	ENVIRONMENT/CATEGORY	1	CR	J7.0I	ENVIRONMENT/CATEGORY	2	G20
	IDENTITY	AT	CR	J7.0I	EXERCISE INDICATOR IDENTITY IDENTITY AMPLIFYING DESCRIPTOR	RX RX RX	G20
	PRIMARY IDENTITY AMPLIFICATION	AT	CR	J7.0I	EXERCISE INDICATOR IDENTITY IDENTITY AMPLIFYING DESCRIPTOR AIR PLATFORM AIR PLATFORM ACTIVITY	RX RX RX RX RX	G20
	IDENTITY AMPLIFICATION	AT	CR	J7.0I	EXERCISE INDICATOR IDENTITY AIR PLATFORM AIR PLATFORM ACTIVITY	RX RX RX RX	G20
	TRACK NUMBER	AT	CR	J7.0I	TRACK NUMBER, REFERENCE	RX	G13
	PU/RU ADDRESS/SOURCE	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	2, G12
	STATUS INDICATOR	0	None	NA	NA	NA	

C-747

APPENDIX C

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.9A-9. M.9A(AC=6) Message Data Element Translation from the
J7.0(ACT=1) Message (Sheet 2 of 2)

NOTES

1. The Exercise Indicator, Identity, Identity Amplifying Descriptor, Air Platform, and Air Platform Activity fields received in a J7.0 (ACT = 1) with the Controlling Unit Indicator field set to value 1 shall be used to update data held in the FJU database.
2. The PU/RU Address/Source field of an M.9A(AC=6) message forwarded to Link 11/11B shall always be the source of the data being forwarded.

TABLE C.5.2-M.9A-10. M.9A(AC=6) Message Data Element Translation from the J10.3 Message (Sheet 1 of 2)

Link 11/11B					Link 16		
MESSAGE	FIELD	TRANSLATION			DATA ELEMENT	VALUE	NOTES
M.9A(AC=6)	LABEL	9	REQUIRED	WORD	LABEL, J-SERIES	10	
	SUBLABEL	0	CR	J10.3I	SUBLABEL, J-SERIES	3	1
	ACTION	6	None	NA	NA	NA	
	ENVIRONMENT/CATEGORY	1	None	NA	NA	NA	2
	IDENTITY	AT	CR	J2.2I or J3.2I	(See Note 1) EXERCISE INDICATOR IDENTITY IDENTITY AMPLIFYING DESCRIPTOR SPECIAL INTEREST INDICATOR	RX RX RX RX	1 G20
	PRIMARY IDENTITY AMPLIFICATION	AT	CR	J2.2C1 or J3.2I	AIR PLATFORM AIR PLATFORM ACTIVITY EXERCISE INDICATOR IDENTITY IDENTITY AMPLIFYING DESCRIPTOR SPECIAL INTEREST INDICATOR	RX RX RX RX RX	G20 G20
	IDENTITY AMPLIFICATION	AT	CR	J2.2C1 or J3.2I	AIR PLATFORM AIR PLATFORM ACTIVITY EXERCISE INDICATOR IDENTITY IDENTITY AMPLIFYING DESCRIPTOR SPECIAL INTEREST INDICATOR	RX RX RX RX RX	G20 G20
	TRACK NUMBER	AT	CR	J10.3I	TRACK NUMBER, REFERENCE	RX	G13
	PU/RU ADDRESS/SOURCE	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	2, G12
	STATUS INDICATOR	0	CR	J10.3I	SUBLABEL, J-SERIES	3	

APPENDIX C

TABLE C.5.2-M.9A-10. M.9A(AC=6) Message Data Element Translation from the J10.3 Message (Sheet 2 of 2)

NOTES

1. The M.9A(AC=6) Identity is derived from the PPLI or surveillance information on the track. If it is derived from the J2.2 PPLI message, the Identity field shall be set to value 1 or 3, Friend. The determination of this value is dependent on the Platform/Platform Activity in accordance with General Note 20. If the M.9A(AC=6) Identity is derived from the J3.2 Surveillance message, it will be determined in accordance with General Note 20.
2. The PU/RU Address/Source field of an M.9A(AC=6) message forwarded on Link 11/11B shall always be the source of data being forwarded.

TABLE C.5.2-M.9A-11. M.9A(AC=6) Message Data Element Translation from the J10.5 Message (Sheet 1 of 2)

Link 11/11B			Link 16			
MESSAGE	FIELD	TRANSLATION		DATA ELEMENT	VALUE	NOTES
M.9A(AC=6)	LABEL	9	REQUIRED	WORD	10	
	SUBLABEL	0	CR	J10.5I	SUBLABEL, J-SERIES	5
	ACTION	6	None	NA	NA	NA
	ENVIRONMENT/CATEGORY	1	None	NA	NA	NA
	IDENTITY	AT	CR	J2.0I or J3.2I	(See Note 2) EXERCISE INDICATOR IDENTITY IDENTITY AMPLIFYING DESCRIPTOR SPECIAL INTEREST INDICATOR	RX RX RX RX RX 1, 2 G20
	PRIMARY IDENTITY AMPLIFICATION	AT	CR	J2.2C1 or J3.2I	AIR PLATFORM AIR PLATFORM ACTIVITY EXERCISE INDICATOR IDENTITY IDENTITY AMPLIFYING DESCRIPTOR SPECIAL INTEREST INDICATOR	RX RX RX RX RX RX 1, G20
				J3.2C1	AIR PLATFORM AIR PLATFORM ACTIVITY	RX RX 1, G20
	IDENTITY AMPLIFICATION	AT	CR	J2.2C1 or J3.2I	AIR PLATFORM AIR PLATFORM ACTIVITY EXERCISE INDICATOR IDENTITY IDENTITY AMPLIFYING DESCRIPTOR SPECIAL INTEREST INDICATOR	RX RX RX RX RX RX 1, G20
				J3.2C1	AIR PLATFORM AIR PLATFORM ACTIVITY	RX RX 1, G20
	TRACK NUMBER	AT	CR	J10.5I	TRACK NUMBER, REFERENCE	RX G13
	PU/RU ADDRESS/SOURCE	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX 3, G12
	STATUS INDICATOR	AT	CR	J10.5I	CONTROLLING UNIT STATUS	RX 4

C-751

APPENDIX C

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.9A-11. M.9A(AC=6) Message Data Element Translation from the J10.5 Message (Sheet 2 of 2)

NOTES

1. The M.9A(AC=6) Identity, Primary Identity Amplification, and Identity Amplification fields will be set to value 0 when M.9A(AC=6, STI=1).
2. The M.9A(AC=6) Identity is derived from the PPLI or surveillance information on the track. If it is derived from the J2.2 PPLI message, the Identity field shall be set to value 3, Friend.
3. The PU/RU Address/Source field of an M.9A(AC=6) message forwarded onto Link 11/11B shall always be the source of data being forwarded.
4. The J10.5 Controlling Unit Status is forwarded as follows:

Link 11/11B
STATUS INDICATOR
0
1

Link 16
CONTROLLING UNIT STATUS
1
0

TABLE C.5.2-M.9A-12. M.9A(AC=7) Message Data Element Translation from the J7.0 Message (Sheet 1 of 2)

Link 11/11B				Link 16			
MESSAGE	FIELD	TRANSLATION			DATA ELEMENT	VALUE	NOTES
M.9A(AC=7)	LABEL	<u>9</u>	CR	J7.0I	LABEL, J-SERIES	<u>7</u>	
	SUBLABEL	0	CR	J7.0I	SUBLABEL, J-SERIES	0	
	ACTION	7	CR	J7.0I	ACTION, TRACK MANAGEMENT ALERT STATUS CHANGE	3 or 4 0	
	TRACK NUMBER	AT	CR	J7.0I	TRACK NUMBER, REFERENCE	RX	G13
	PU/RU ADDRESS/SOURCE	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	1, G12
	STATUS INDICATOR	AT	CR	J7.0I	ACTION, TRACK MANAGEMENT	3 or 4	2

APPENDIX C

TABLE C.5.2-M.9A-12. M.9A(AC=7) Message Data Element Translation from the
J7.0 Message (Sheet 2 of 2)

NOTES

1. The PU/RU Address/Source of the M.9A(AC=5 or 7) message shall always be the source of the data being forwarded.

2. The STI field is determined as follows:

Link 11/11B

STATUS INDICATOR

0 - EMERGENCY ALERT

1 - FORCE TELL ALERT

Link 16

ACTION, TRACK MANAGEMENT

3

4

TABLE C.5.2-M.9A-13. M.9A(AC=9) Message Data Element Translation from the J7.5 Message (Sheet 1 of 3)

Link 11/11B					Link 16		
MESSAGE	FIELD	VALUE	TRANSLATION	WORD	DATA ELEMENT	VALUE	NOTES
M.9A(AC=9)	LABEL	9	CR	J7.5I	LABEL, J-SERIES	7	
	SUBLABEL	0	CR	J7.5I	SUBLABEL, J-SERIES	5	
	ACTION	9	CR	J7.5I	ACTION, IFF/SIF MANAGEMENT	RX	1
	MODE I/II/III CODE	AT	CR	J7.5I	MODE I CODE	RX	2, 3, G15
					MODE I CODE APPLICABILITY	RX	
					MODE II CODE	RX	
					MODE II CODE APPLICABILITY	RX	
					MODE III CODE	RX	
					MODE III CODE APPLICABILITY	RX	
					MODE IV INDICATOR	RX	
					MODE IV INDICATOR APPLICABILITY	RX	
	TRACK NUMBER	AT	CR	J7.5I	TRACK NUMBER, REFERENCE	RX	G13
	PU/RU ADDRESS/SOURCE	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	G12
	IFF/SIF ACTION CODE	AT	CR	J7.5I	ACTION, IFF/SIF MANAGEMENT	RX	4
	MODE INDICATOR	AT	CR	J7.5I	ACTION, IFF/SIF MANAGEMENT	RX	5
					MODE I CODE APPLICABILITY	RX	
					MODE II CODE APPLICABILITY	RX	
					MODE III CODE APPLICABILITY	RX	
					MODE IV INDICATOR APPLICABILITY	RX	

C-755

APPENDIX C

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.9A-13. M.9A(AC=9) Message Data Element Translation from the J7.5 Message (Sheet 2 of 3)

NOTES

1. The M.9A(AC=9) message shall be forwarded from the J7.5 (ACT = 0, 1, or 2) message.
2. The multiple modes possible in a single J7.5 message may result in multiple M.9A(AC=9) messages being forwarded.
3. Valid Mode I codes for data link exchange shall range from 01 through 73 (octal) with 31 possible values, those values with least significant digit greater than 3 not being used. The Mode I/II/III Code field of the M.9A(AC=9) IFF Codes are in the order A, B, C, D (A, B only for Mode I), with each triad in the order 4, 2, 1 and the most significant bit A4 in bit position 23. The Mode I field of the J7.5I IFF codes are in the order A4, A2, A1, B2, B1 with the most significant bit A4 in bit position 45.
4. IFF/SIF Action Code (ISAC) translation from Action, IFF/SIF Management:

Link 11/11BIFF/SIF ACTION CODE

- 0 - CLEAR REQUEST
- 1 - DIFFERENCE REPORT

Link 16ACTION, IFF/SIF MANAGEMENT

- 0 - CLEAR IFF/SIF
- 1 - IFF/SIF DIFFERENCE REPORT
- 2 - IFF/SIF UPDATE REQUEST

5. The M.9A(AC=9, Mode Indicator (MI) = 2, 3, 4, or 6) message may be used for ISAC = 0 or 1. The MI = 0 is only applicable in conjunction with the ISAC = 0. The MI = 7 is only applicable in conjunction with the ISAC = 1. If the J7.5 Mode IV Indicator Applicability = 1 and the Action, IFF/SIF Management = 0, a separate M.9A(AC=9) shall be transmitted with ISAC = 0 and MI = 3. In the latter case, the remaining applicable modes will be forwarded in the manner resulting in the fewest M.9A(AC=9) messages.

APPENDIX C

TABLE C.5.2-M.9A-13. M.9A(AC=9) Message Data Element Translation from the J7.5 Message (Sheet 3 of 3)

NOTES (Continued)

5. (Continued)

<u>Link 11/11B</u>		<u>Link 16</u>	
<u>IFF/SIF ACTION</u>		<u>MODE I CODE</u>	<u>ACTION, IFF/SIF</u>
<u>CODE</u>	<u>MODE INDICATOR</u>	<u>APPLICABILITY</u>	<u>MANAGEMENT</u>
0	2	1	0
1	2	1	1
<u>IFF/SIF ACTION</u>		<u>MODE II CODE</u>	<u>ACTION, IFF/SIF</u>
<u>CODE</u>	<u>MODE INDICATOR</u>	<u>APPLICABILITY</u>	<u>MANAGEMENT</u>
0	4	1	0
1	4	1	1
<u>IFF/SIF ACTION</u>		<u>MODE III CODE</u>	<u>ACTION, IFF/SIF</u>
<u>CODE</u>	<u>MODE INDICATOR</u>	<u>APPLICABILITY</u>	<u>MANAGEMENT</u>
0	6	1	0
1	6	1	1
<u>IFF/SIF ACTION</u>		<u>MODE IV</u>	<u>ACTION, IFF/SIF</u>
<u>CODE</u>	<u>MODE INDICATOR</u>	<u>INDICATOR</u>	<u>MANAGEMENT</u>
0	3	<u>APPLICABILITY</u>	
1	3	1	0
 		1	1
<u>IFF/SIF ACTION</u>		<u>MODE</u>	<u>ACTION, IFF/SIF</u>
<u>CODE</u>	<u>MODE INDICATOR</u>	<u>APPLICABILITY</u>	<u>MANAGEMENT</u>
0	0	MODE I = 1 AND	0
		MODE II = 1	
		AND MODE III	
		= 1	
1	7	MODE I = 1 AND	2
		/OR MODE II	
		= 1 AND/OR	
		MODE III = 1	
		AND/OR MODE	
		IV = 1	

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-M.9B-1. M.9B Message Data Element Translation from the J3.0 Message (Sheet 1 of 2)

Link 11/11B			Link 16		
MESSAGE	FIELD	TRANSLATION			
<u>M.9B</u>	<u>FIELD</u>	<u>VALUE</u>	<u>REQUIRED</u>	<u>WORD</u>	<u>DATA ELEMENT</u>
	<u>LABEL</u>	<u>9</u>	<u>CR</u>	<u>J3.0I</u>	<u>LABEL, J-SERIES</u>
					<u>SUBLABEL, J-SERIES</u>
	SUBLABEL	1	CR	J3.0I	LABEL, J-SERIES
					SUBLABEL, J-SERIES
	ACTION	AT	CR	J3.0C5	CONNECT/DISCONNECT
	TN ORIGINATOR	AT	CR	HEADER	TRACK NUMBER, SOURCE
	TRACK NUMBER ONE	AT	CR	J3.0I	TRACK NUMBER, REFERENCE
	TRACK NUMBER TWO	AT	CR	J3.0C5	TRACK NUMBER, RELATED 2

1

G2,
G12

G13

G13

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.9B-1. M.9B Message Data Element Translation from the J3.0
Message (Sheet 2 of 2)

NOTES

1. The M.9B(AC=6 or 15) message is determined by the J3.0C5 word
Connect/Disconnect value as follows:

Link 11/11B	Link 16
ACTION	CONNECT/DISCONNECT
6	0
15	1

TABLE C.5.2-M.9B-2. M.9B Message Data Element Translation from the J3.1 Message (Sheet 1 of 2)

Link 11/11B			Link 16		
MESSAGE	FIELD	TRANSLATION	DATA ELEMENT	VALUE	NOTES
M.9B	LABEL	CR	LABEL, J-SERIES	3	1
	SUBLABEL	1 CR	SUBLABEL, J-SERIES	1	
	ACTION	6 None	NA	NA	
	TN ORIGINATOR	AT CR	TRACK NUMBER, SOURCE	RX	G2, G12
	TRACK NUMBER ONE	AT CR	TRACK NUMBER, REFERENCE	RX	G13
	TRACK NUMBER TWO	AT CR	TRACK NUMBER, PREVIOUSLY REPORTED	RX	G13

APPENDIX C

TABLE C.5.2-M.9B-2. M.9B Message Data Element Translation from the J3.1
Message (Sheet 2 of 2)

NOTES

1. The M.9B message is derived from either the J3.1, J7.2, J7.7, or J10.6 message.

TABLE C.5.2-M.9B-3. M.9B Message Data Element Translation from the J7.2 Message (Sheet 1 of 2)

Link 11/11B				Link 16			
MESSAGE	FIELD	TRANSLATION			DATA ELEMENT	VALUE	NOTES
M.9B	LABEL	VALUE	REQUIRED	WORD	LABEL, J-SERIES	7	1
	SUBLABEL	1	CR	J7.2I	SUBLABEL, J-SERIES	2	
	ACTION	7	CR	J7.2I	ACTION, CORRELATE	0	
	TN ORIGINATOR	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	G2, G12
	RESPONSE VALUE	RX	=	J7.2I	RESPONSE VALUE	RX	
	TRACK NUMBER ONE	AT	CR	J7.2I	TRACK NUMBER, RETAINED	RX	G13
	TRACK NUMBER TWO	AT	CR	J7.2I	TRACK NUMBER, DROPPED	RX	G13

APPENDIX C

TABLE C.5.2-M.9B-3. M.9B Message Data Element Translation from the J7.2
Message (Sheet 2 of 2)

NOTES

1. The M.9B message is derived from either the J3.1, J7.2, J7.7, or J10.6 message.

TABLE C.5.2-M.9B-4. M.9B Message Data Element Translation from the J7.7 Message (Sheet 1 of 2)

Link 11/11B			Link 16				
<u>MESSAGE</u> M.9B	<u>FIELD</u> LABEL	<u>TRANSLATION</u>			<u>DATA ELEMENT</u> LABEL, J-SERIES	<u>VALUE</u> 7	<u>NOTES</u> 1
		<u>VALUE</u> 9	<u>REQUIRED</u> CR	<u>WORD</u> J7.7I			
	SUBLABEL	1	CR	J7.7I	SUBLABEL, J-SERIES	7	
	ACTION	AT	CR	J7.7I	ACTION, ASSOCIATION	RX	2
	TN ORIGINATOR	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	G2, G12
	TRACK NUMBER ONE	AT	CR	J7.7I	TRACK NUMBER, SUBJECT	RX	G13
	TRACK NUMBER TWO	AT	CR	J7.7I	TRACK NUMBER, ASSOCIATED	RX	G13

APPENDIX C

TABLE C.5.2-M.9B-4. M.9B Message Data Element Translation from the J7.7 Message (Sheet 2 of 2)

NOTES

1. The M.9B message is derived from either the J3.1, J7.2, J7.7 or J10.6 message.
2. The M.9B(AC=6 or 15) message is determined by the J7.7 Action, Association value as follows:

Link 11/11BACTION

6

15

Link 16ACTION, ASSOCIATION

0

1

TABLE C.5.2-M.9B-5. M.9B Message Data Element Translation from the J10.6 Message (Sheet 1 of 2)

Link 11/11B				Link 16			
MESSAGE	FIELD	TRANSLATION			DATA ELEMENT	VALUE	NOTES
M.9B	LABEL	VALUE	REQUIRED	WORD	LABEL, J-SERIES	10	1
	SUBLABEL	1	CR	J10.6I	SUBLABEL, J-SERIES	6	
	ACTION	AT	CR	J10.6I	PAIRING ACTION	RX	2
	TN ORIGINATOR	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	G2, G12
	RESPONSE VALUE	0	None	NA	NA	NA	
	TRACK NUMBER ONE	AT	CR	J10.6I	TRACK NUMBER, REFERENCE	RX	G13
	TRACK NUMBER TWO	AT	CR	J10.6I	TRACK NUMBER, OBJECTIVE	RX	G13

APPENDIX C

TABLE C.5.2-M.9B-5. M.9B Message Data Element Translation from the J10.6 Message (Sheet 2 of 2)

NOTES

1. The M.9B message is derived from either the J3.1, J7.2, J7.7 or J10.6 message.
2. The M.9B(AC=0-5 or 15) message is determined by the J10.6 Pairing Action value as follows:

Link 11/11BACTION

0 - GENERAL PAIRING

1 - STRIKE PAIRING
2 - RENDEZVOUS
3 - RTB PAIRING
4 - CAP STATION PAIRING
5 - CLOSE AIR SUPPORT
15 - TERMINATE PAIRING/ ASSOCIATION

Link 16PAIRING ACTION

0 - NO STATEMENT
1 - GENERAL PAIRING
7 - TANKER PAIRING
8-14 - UNDEFINED
2 - INTERDICTION PAIRING
3 - RENDEZVOUS PAIRING
6 - RETURN TO BASE PAIRING
4 - COMBAT AIR PATROL PAIRING
5 - CLOSE AIR SUPPORT PAIRING
15 - TERMINATE PAIRING

TABLE C.5.2-M.9C. M.9C Message Data Element Translation from Link 16 (Sheet 1 of 2)

Link 11/11B					Link 16		
MESSAGE	FIELD	TRANSLATION			DATA ELEMENT	VALUE	NOTES
M.9C	LABEL	VALUE	REQUIRED	WORD	LABEL, J-SERIES	7	
	SUBLABEL	2	CR	J7.3I	SUBLABEL, J-SERIES	3	
	PU/RU ORIGINATOR	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	G12
	PU/RU ADDRESSEE	AT	CR	J7.3I J7.3C1	TRACK NUMBER, ADDRESSEE 1 TRACK NUMBER, ADDRESSEE 2 TRACK NUMBER, ADDRESSEE 3 TRACK NUMBER, ADDRESSEE 4 TRACK NUMBER, ADDRESSEE 5	RX RX RX RX RX	G12 1, G12 1, G12 1, G12 1, G12
	OPERATOR POSITION	AT	CR	J7.3I	ACTION, POINTER	RX	2
	X COORDINATE	AT	CR	J7.3I	LATITUDE, 0.0412 MINUTE LONGITUDE, 0.0412 MINUTE	RX RX	G9
	Y COORDINATE	AT	CR	J7.3I	LATITUDE, 0.0412 MINUTE LONGITUDE, 0.0412 MINUTE	RX RX	G9

APPENDIX C

TABLE C.5.2-M.9C. M.9C Message Data Element Translation from Link 16 (Sheet
2 of 2)

NOTES

1. The multiple addressees possible in a single J7.3 message may result in multiple M.9C messages, each addressed to a different unit.
2. The Operator Position field is determined from the Action, Pointer field as follows:

Link 11/11B
OPERATOR POSITION

- 0 - WEAPONS
- 1 - TRACKING
- 2 - EW
- 3 - SP

Link 16
ACTION, POINTER

- 0 - NO STATEMENT
- 1 - WEAPONS
- 2 - TRACKING
- 3 - ELECTRONIC WARFARE
- 4 - SPECIAL PROCESSING

TABLE C.5.2-M.9E-1. M.9E(AC=0) Message Data Element Translation from the J10.3 Message (Sheet 1 of 2)

Link 11/11B			Link 16				
MESSAGE	FIELD	TRANSLATION			DATA ELEMENT	VALUE	NOTES
M.9E	LABEL	VALUE	REQUIRED	WORD	LABEL, J-SERIES	10	
		9	CR	J10.3I			
	SUBLABEL	4	CR	J10.3I	SUBLABEL, J-SERIES	3	
	TRACK NUMBER	AT	CR	J10.3I or	REQUEST FOR ASSUME CONTROL	RX	2
				HEADER	TRACK NUMBER, REFERENCE	RX	G13
					TRACK NUMBER, SOURCE	RX	G12
	ACTION	0	CR	J10.3E0	LINK 4A ADDRESS	RX	1
	LINK 4A ADDRESS	RX	=	J10.3E0	LINK 4A ADDRESS	RX	

APPENDIX C

TABLE C.5.2-M.9E-1. M.9E(AC=0) Message Data Element Translation from the
J10.3 Message (Sheet 2 of 2)

NOTES

1. The M.9E(AC=0) message is forwarded when the FJU receives the J10.3 (R/C = 0) message with Link 4A Address set to other than 0.
2. If the J10.3 message has Request for Assume Control set to value 0 or 1, the M.9E Track Number is determined from the J10.3 Reference TN. If the J10.3 message has request for Assume Control set to value 2, the M.9E Track Number is determined from Source TN in the received header word.

TABLE C.5.2-M.9E-2. M.9E(AC=1) Message Data Element Translation from the J2.2 Message (Sheet 1 of 2)

Link 11/11B					Link 16		
MESSAGE	FIELD	VALUE	TRANSLATION		DATA ELEMENT	VALUE	NOTES
M.9E	LABEL	9	CR	J2.2I	LABEL, J-SERIES	2	1
	SUBLABEL	4	CR	J2.2I	SUBLABEL, J-SERIES	2	
	TRACK NUMBER	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	G12
	ACTION	1	=	J2.2C2	VOICE CALL SIGN INDICATOR	1	
	VOICE CALL SIGN	RX	=	J2.2C2	VOICE CALL SIGN	RX	2

APPENDIX C

TABLE C.5.2-M.9E-2. M.9E(AC=1) Message Data Element Translation from the
J2.2 Message (Sheet 2 of 2)

NOTES

1. The M.9E(AC=1) message may be forwarded from the J2.2, J2.3, J2.4, J2.5, J2.6, J9.0, J10.3, and J10.5 messages.
2. The M.9E(AC=1) message is forwarded when the FJU receives a J2.2 message in which the Voice Call Sign has changed.

TABLE C.5.2-M.9E-3. M.9E(AC=1) Message Data Element Translation from the J2.3 Message (Sheet 1 of 2)

Link 11/11B					Link 16		
MESSAGE	FIELD	TRANSLATION			DATA ELEMENT	VALUE	NOTES
M.9E	LABEL	9	CR	J2.3I	LABEL, J-SERIES	2	1
	SUBLABEL	4	CR	J2.3I	SUBLABEL, J-SERIES	3	
	TRACK NUMBER	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	G12
	ACTION	1	=	J2.3C2	VOICE CALL SIGN INDICATOR	1	
	VOICE CALL SIGN	RX	=	J2.3C2	VOICE CALL SIGN	RX	2

APPENDIX C

TABLE C.5.2-M.9E-3. M.9E(AC=1) Message Data Element Translation from the
J2.3 Message (Sheet 2 of 2)

NOTES

1. The M.9E(AC=1) message may be forwarded from the J2.2, J2.3, J2.4, J2.5, J2.6, J9.0, J10.3, and J10.5 messages.
2. The M.9E(AC=1) message is forwarded when the FJU receives a J2.3 message in which the Voice Call Sign has changed.

TABLE C.5.2-M.9E-4. M.9E(AC=1) Message Data Element Translation from the J2.4 Message (Sheet 1 of 2)

Link 11/11B					Link 16		
MESSAGE	FIELD	TRANSLATION			DATA ELEMENT	VALUE	NOTES
M.9E	LABEL	9	CR	J2.4I	LABEL, J-SERIES	2	1
					SUBLABEL, J-SERIES	4	
	SUBLABEL	4	CR	J2.4I	LABEL, J-SERIES	2	
					SUBLABEL, J-SERIES	4	
	TRACK NUMBER	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	G12
	ACTION	1	=	J2.4C2	VOICE CALL SIGN INDICATOR	1	
	VOICE CALL SIGN	RX	=	J2.4C2	VOICE CALL SIGN	RX	2

APPENDIX C

TABLE C.5.2-M.9E-4. M.9E(AC=1) Message Data Element Translation from the
J2.4 Message (Sheet 2 of 2)

NOTES

1. The M.9E(AC=1) message may be forwarded from the J2.2, J2.3, J2.4, J2.5, J2.6, J9.0, J10.3, and J10.5 messages.
2. The M.9E(AC=1) message is forwarded when the FJU receives a J2.4 message in which the Voice Call Sign has changed.

TABLE C.5.2-M.9E-5. M.9E(AC=1) Message Data Element Translation from the J2.5 Message (Sheet 1 of 2)

Link 11/11B					Link 16		
MESSAGE	FIELD	TRANSLATION			DATA ELEMENT	VALUE	NOTES
M.9E	LABEL	9	CR	J2.5I	LABEL, J-SERIES	2	1
	SUBLABEL	4	CR	J2.5I	SUBLABEL, J-SERIES	5	
	TRACK NUMBER	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	G12
	ACTION	1	=	J2.5C1	VOICE CALL SIGN INDICATOR	1	
	VOICE CALL SIGN	RX	=	J2.5C1	VOICE CALL SIGN	RX	2

APPENDIX C

TABLE C.5.2-M.9E-5. M.9E(AC=1) Message Data Element Translation from the
J2.5 Message (Sheet 2 of 2)

NOTES

1. The M.9E(AC=1) message may be forwarded from the J2.2, J2.3, J2.4, J2.5, J2.6, J9.0, J10.3, and J10.5 messages.
2. The M.9E(AC=1) message is forwarded when the FJU receives a J2.5 message in which the Voice Call Sign has changed.

TABLE C.5.2-M.9E-6. M.9E(AC=1) Message Data Element Translation from the J2.6 Message (Sheet 1 of 2)

Link 11/11B					Link 16		
<u>MESSAGE</u> M.9E	<u>FIELD</u> LABEL	<u>TRANSLATION</u>			<u>DATA ELEMENT</u> LABEL, J-SERIES	<u>VALUE</u> 2	<u>NOTES</u> 1
		<u>VALUE</u> 9	<u>REQUIRED</u> CR	<u>WORD</u> J2.6I			
	SUBLABEL	4	CR	J2.6I	SUBLABEL, J-SERIES	6	
	TRACK NUMBER	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	G12
	ACTION	1	=	J2.6C1	VOICE CALL SIGN INDICATOR	1	
	VOICE CALL SIGN	RX	=	J2.6C1	VOICE CALL SIGN	RX	2

APPENDIX C

TABLE C.5.2-M.9E-6. M.9E(AC=1) Message Data Element Translation from the
J2.6 Message (Sheet 2 of 2)

NOTES

1. The M.9E(AC=1) message may be forwarded from the J2.2, J2.3, J2.4, J2.5, J2.6, J9.0, J10.3, and J10.5 messages.
2. The M.9E(AC=1) message is forwarded when the FJU receives a J2.6 message in which the Voice Call Sign has changed.

TABLE C.5.2-M.9E-7. M.9E(AC=1) Message Data Element Translation from the J9.0 Message (Sheet 1 of 2)

Link 11/11B					Link 16		
MESSAGE	FIELD	TRANSLATION			DATA ELEMENT	VALUE	NOTES
M.9E	LABEL	VALUE	REQUIRED	WORD	LABEL, J-SERIES	9	1
	SUBLABEL	4	CR	J9.0I	SUBLABEL, J-SERIES	0	
	TRACK NUMBER	AT	CR	J9.0E0	TRACK NUMBER, FRIENDLY WEAPON	RX	G13
	ACTION	1	CR	J9.0C1	VOICE CALL SIGN	RX	2
	VOICE CALL SIGN	RX	=	J9.0C1	VOICE CALL SIGN	RX	

APPENDIX C

TABLE C.5.2-M.9E-7. M.9E(AC=1) Message Data Element Translation from the
J9.0 Message (Sheet 2 of 2)

NOTES

1. The M.9E(AC=1) message may be forwarded from the J2.2, J2.3, J2.4, J2.5, J2.6, J9.0, J10.3, and J10.5 messages.
2. The M.9E(AC=1) message is forwarded when the FJU receives the J9.0 message with Voice Call Sign set to other than 0.

TABLE C.5.2-M.9E-8. M.9E(AC=1) Message Data Element Translation from the J10.3 Message (Sheet 1 of 2)

Link 11/11B			Link 16				
MESSAGE	FIELD	TRANSLATION			DATA ELEMENT	VALUE	NOTES
M.9E	LABEL	9	REQUIRED	WORD	LABEL, J-SERIES	10	1
	SUBLABEL	4	CR	J10.3I	SUBLABEL, J-SERIES	3	
	TRACK NUMBER	AT	CR	J10.3I or	REQUEST FOR ASSUME CONTROL	RX	3
				HEADER	TRACK NUMBER, REFERENCE	RX	G13
					TRACK NUMBER, SOURCE	RX	G12
	ACTION	1	CR	J10.3E0	VOICE CALL SIGN	RX	2
	VOICE CALL SIGN	RX	=	J10.3E0	VOICE CALL SIGN	RX	

APPENDIX C

TABLE C.5.2-M.9E-8. M.9E(AC=1) Message Data Element Translation from the J10.3 Message (Sheet 2 of 2)

NOTES

1. The M.9E(AC=1) message may be forwarded from the J2.2, J2.3, J2.4, J2.5, J2.6, J9.0, J10.3, and J10.5 messages.
2. The M.9E(AC=1) message is forwarded when the FJU receives the J10.3(R/C = 0) message with Voice Call Sign set to other than 0.
3. If the J10.3 message has Request for Assume Control set to value 0 or 1, the M.9E Track Number is determined from the J10.3 Reference TN. If the J10.3 message has Request for Assume Control set to value 2, the M.9E Track Number is determined from Source TN in the received header word.

TABLE C.5.2-M.9E-9. M.9E(AC=1) Message Data Element Translation from the J10.5 Message (Sheet 1 of 2)

Link 11/11B					Link 16		
<u>MESSAGE</u> M.9E	<u>FIELD</u> LABEL	<u>TRANSLATION</u>			<u>DATA ELEMENT</u> LABEL, J-SERIES	<u>VALUE</u> 10	<u>NOTES</u> 1
		<u>VALUE</u> 9	<u>REQUIRED</u> CR	<u>WORD</u> J10.5I			
	SUBLABEL	4	CR	J10.5I	SUBLABEL, J-SERIES	5	
	TRACK NUMBER	AT	CR	J10.5I	TRACK NUMBER, REFERENCE	RX	G13
	ACTION	1	CR	J10.5I	VOICE CALL SIGN	RX	2
	VOICE CALL SIGN	RX	=	J10.5I	VOICE CALL SIGN	RX	

APPENDIX C

TABLE C.5.2-M.9E-9. M.9E(AC=1) Message Data Element Translation from the
J10.5 Message (Sheet 2 of 2)

NOTES

1. The M.9E(AC=1) message may be forwarded from the J2.2, J2.3, J2.4, J2.5, J2.6, J9.0, J10.3, and J10.5 messages.
2. The M.9E(AC=1) message is forwarded when the FJU receives the J10.5 message with Voice Call Sign set to other than 0.

TABLE C.5.2-M.9E-10. M.9E(AC=2) Message Data Element Translation from the J9.0 Message (Sheet 1 of 2)

Link 11/11B					Link 16		
<u>MESSAGE</u> M.9E	<u>FIELD</u> LABEL	<u>TRANSLATION</u>			<u>DATA ELEMENT</u> LABEL, J-SERIES	<u>VALUE</u> 9	<u>NOTES</u> 1
		<u>VALUE</u> 9	<u>REQUIRED</u> CR	<u>WORD</u> J9.0I			
	SUBLABEL	4	CR	J9.0I	SUBLABEL, J-SERIES	0	
	TRACK NUMBER	AT	CR	J9.0E0	TRACK NUMBER, FRIENDLY WEAPON	RX	G13
	ACTION	2	CR	J9.0C1	VOICE FREQUENCY/CHANNEL	RX	2
	VOICE CONTROL FREQUENCY	RX	=	J9.0C1	VOICE FREQUENCY/CHANNEL	RX	

APPENDIX C

TABLE C.5.2-M.9E-10. M.9E(AC=2) Message Data Element Translation from the
J9.0 Message (Sheet 2 of 2)

NOTES

1. The M.9E(AC=2) message may be forwarded from the J9.0 and J10.3 messages.
2. The M.9E(AC=2) message is forwarded when the FJU receives the J9.0 message with Voice Frequency/Channel other than No Statement.

TABLE C.5.2-M.9E-11. M.9E(AC=2) Message Data Element Translation from the J10.3 Message (Sheet 1 of 2)

Link 11/11B					Link 16		
MESSAGE	FIELD	VALUE	TRANSLATION		DATA ELEMENT	VALUE	NOTES
M.9E	LABEL	9	REQUIRED	WORD	LABEL, J-SERIES	10	1
	SUBLABEL	4	CR	J10.3I	SUBLABEL, J-SERIES	3	
	TRACK NUMBER	AT	CR	J10.3I	TRACK NUMBER, REFERENCE	RX	G13
	ACTION	2	CR	J10.3C1	VOICE FREQUENCY/CHANNEL	RX	2
	VOICE CONTROL FREQUENCY	RX	=	J10.3C1	VOICE FREQUENCY/CHANNEL	RX	

APPENDIX C

TABLE C.5.2-M.9E-11. M.9E(AC=2) Message Data Element Translation from the
J10.3 Message (Sheet 2 of 2)

NOTES

1. The M.9E(AC=2) message may be forwarded from the J9.0 and J10.3 messages.
2. The M.9E(AC=2) message is forwarded when the FJU receives the J10.3
(Request for Assume Control = 0 or 1, R/C = 3, message or J10.3 Request for
Assume Control = 2, R/C = 0) message with Voice Frequency/Channel other than
No Statement.

TABLE C.5.2-M.9E-12. M.9E(AC=3) Message Data Element Translation from the J7.4 Message

Link 11/11B					Link 16		
MESSAGE	FIELD	VALUE	TRANSLATION		DATA ELEMENT	VALUE	NOTES
M.9E	LABEL	9	CR	J7.4I	LABEL, J-SERIES	7	
	SUBLABEL	4	CR	J7.4I	SUBLABEL, J-SERIES	4	
	TRACK NUMBER	AT	CR	J7.4I	TRACK NUMBER, REFERENCE	RX	G13
	ACTION	3	CR	J7.4I	TRACK NUMBER, REPORT/REQUEST	0	
					NATO LINK 1 TRACK NUMBER	1	
					APPLICABILITY		
	LINK 1 NATO TRACK NUMBER	RX	=	J7.4I	NATO LINK 1 TRACK NUMBER	RX	
	SWITCH	0	None	NA	NA	NA	

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-M.9E-13. M.9E(AC=4) Message Data Element Translation from the J10.3 Message (Sheet 1 of 2)

Link 11/11B					Link 16		
<u>MESSAGE</u> M.9E	<u>FIELD</u> <u>LABEL</u>	<u>TRANSLATION</u>			<u>DATA ELEMENT</u> <u>LABEL, J-SERIES</u>	<u>VALUE</u> <u>10</u>	<u>NOTES</u>
		<u>VALUE</u> 9	<u>REQUIRED</u> CR	<u>WORD</u> J10.3I			
	SUBLABEL	4	CR	J10.3I	SUBLABEL, J-SERIES	3	
	TRACK NUMBER	AT	CR	J10.3I	TRACK NUMBER, REFERENCE	RX	G13
	ACTION	4	CR	J10.3C1	VOICE FREQUENCY/CHANNEL	RX	1
	LINK 4A CONTROL FREQUENCY	RX	=	J10.3C1	LINK 4A FREQUENCY	RX	

APPENDIX C

TABLE C.5.2-M.9E-13. M.9E(AC=4) Message Data Element Translation from the J10.3 Message (Sheet 2 of 2)

NOTES

1. The M.9E(AC=4) message is forwarded when the FJU receives the J10.3 (Request for Assume Control = 0 or 1, R/C = 3, message or J10.3 Request for Assume Control = 2, R/C = 0) message with Link 4A Frequency other than No Statement.

TABLE C.5.2-M.9E-14. M.9E(AC=5) Message Data Element Translation from the J7.4 Message

Link 11/11B					Link 16		
<u>MESSAGE</u> M.9E	<u>FIELD</u> LABEL	<u>TRANSLATION</u>			<u>DATA ELEMENT</u> LABEL, J-SERIES	<u>VALUE</u> 7	<u>NOTES</u>
		<u>VALUE</u> 9	<u>REQUIRED</u> CR	<u>WORD</u> J7.4I			
	SUBLABEL	4	CR	J7.4I	SUBLABEL, J-SERIES	4	
	TRACK NUMBER	AT	CR	J7.4I	TRACK NUMBER, REFERENCE	RX	G13
	ACTION	5	CR	J7.4I	TRACK NUMBER, REPORT/REQUEST NATO LINK 1 TRACK NUMBER APPLICABILITY	1 1	
	SWITCH	0	None	NA	NA	NA	

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-M.9F-1. M.9F(0)/M.89F(0) Message Data Element Translation from the J3.0 Message (Sheet 1 of 2)

Link 11/11B					Link 16		
MESSAGE	FIELD	VALUE	TRANSLATION		DATA ELEMENT	VALUE	NOTES
M.9F(0)	LABEL	9	REQUIRED	WORD	LABEL, J-SERIES	3	
	SUBLABEL	5	CR	J3.0I	SUBLABEL, J-SERIES	0	
	TRACK NUMBER	AT	CR	J3.0I	TRACK NUMBER, REFERENCE	RX	G13
	ACTION	0	None	NA	NA	NA	
	X COORDINATE	AT	CR	J3.0E0	LATITUDE, 0.0103 MINUTE LONGITUDE, 0.0103 MINUTE	RX RX	G9
	Y COORDINATE	AT	CR	J3.0E0	LATITUDE, 0.0103 MINUTE LONGITUDE, 0.0103 MINUTE	RX RX	G9
M.89F(0)	LABEL	8	CR	J3.0I	LABEL, J-SERIES SUBLABEL, J-SERIES	3 0	
	MINUTES	RX	=	J3.0I	MINUTE	RX	
	HOURS	RX	=	J3.0I	HOURL	RX	
	CATEGORY/PLATFORM	3	None	NA	NA	NA	
	SOURCE	0	None	NA	NA	NA	
	SQUARE/CIRCLE SWITCH	AT	CR	J3.0C2	SQUARE/CIRCLE SWITCH	RX	1
	PROBABILITY FACTOR	2	None	NA	NA	NA	
	BEARING, ORIENTATION	AT	CR	J3.0C2	AXIS ORIENTATION	RX	G17
	MINOR AXIS	AT	CR	J3.0C2	AREA MINOR AXIS	RX	G18
	MAJOR AXIS	AT	CR	J3.0C2	AREA MAJOR AXIS	RX	G18

C-799

APPENDIX C

MIL-STD-6016B

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.9F-1. M.9F(0)/M.89F(0) Message Data Element Translation from the J3.0 Message (Sheet 2 of 2)

NOTES

1. The Square/Circle Switch is determined as follows:

Link 11/11B

SQUARE/CIRCLE SWITCH

0 - SQUARE/RECTANGLE

1 - CIRCLE/ELLIPSE

Link 16

SQUARE/CIRCLE SWITCH

1 - SQUARE/RECTANGULAR

2 - CIRCULAR/ELLIPTICAL

TABLE C.5.2-M.9F-2. M.9F(0)/M.89F(0) Message Data Element Translation from the J3.7 Message (Sheet 1 of 2)

Link 11/11B					Link 16		
MESSAGE	FIELD	VALUE	TRANSLATION	WORD	DATA ELEMENT	VALUE	NOTES
M.9F(1)	LABEL	9	REQUIRED	J3.7I	LABEL, J-SERIES	3	
M.89F(0)	SUBLABEL	5	CR	J3.7I	SUBLABEL, J-SERIES	7	
	TRACK NUMBER	AT	CR	J3.7I	TRACK NUMBER, REFERENCE	RX	G13
	ACTION	0	None	NA	NA	NA	
	X COORDINATE	AT	CR	J3.7C2	LATITUDE, 0.0051 MINUTE LONGITUDE, 0.0051 MINUTE	RX RX	G9
	Y COORDINATE	AT	CR	J3.7C2	LATITUDE, 0.0051 MINUTE LONGITUDE, 0.0051 MINUTE	RX RX	G9
	LABEL	8	CR	J3.7I	LABEL, J-SERIES SUBLABEL, J-SERIES	3 7	
	MINUTES	RX	=	J3.7I	MINUTE	RX	
	HOURS	RX	=	J3.7I	HOURL	RX	
	CATEGORY/PLATFORM	AT	CR	J3.7C1	ENVIRONMENT/CATEGORY	RX	1
	SOURCE	1	None	NA	NA	NA	
	SQUARE/CIRCLE SWITCH	AT	CR	J3.7I	SQUARE/CIRCLE SWITCH	RX	2
	PROBABILITY FACTOR	2	None	NA	NA	NA	
	BEARING, ORIENTATION	AT	CR	J3.7C2	AXIS ORIENTATION	RX	G17
	MINOR AXIS	AT	CR	J3.7C2	AREA MINOR AXIS	RX	G18
	MAJOR AXIS	AT	CR	J3.7C2	AREA MAJOR AXIS	RX	G18

C-801

APPENDIX C

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.9F-2. M.9F(0)/M.89F(0) Message Data Element Translation from the J3.7 Message (Sheet 2 of 2)

NOTES

1. Category/Platform is determined from the J3.7C1 Environment/Category field as follows:

Link 11/11B	Link 16
CATEGORY/PLATFORM	ENVIRONMENT/CATEGORY
0 - NO STATEMENT	0 - NO STATEMENT/UNKNOWN
1 - AIR	5 - LAND (GROUND)
2 - SURFACE	1 - SPACE
3 - SUBSURFACE	2 - AIR
	3 - SURFACE (MARITIME)
	4 - SUBSURFACE (MARITIME)

2. The Square/Circle Switch is determined as follows:

Link 11/11B	Link 16
SQUARE/CIRCLE SWITCH	SQUARE/CIRCLE SWITCH
0 - SQUARE/RECTANGLE	1 - SQUARE/RECTANGULAR
1 - CIRCLE/ELLIPSE	2 - CIRCULAR/ELLIPTICAL

TABLE C.5.2-M.9F-3. M.9F(0)/M.89F(0) Message Data Element Translation from the J14.0 Message (Sheet 1 of 2)

MESSAGE M.9F(0)	Link 11/11B			Link 16			NOTES
	FIELD LABEL	VALUE 9	TRANSLATION REQUIRED CR	WORD J14.0I	DATA ELEMENT LABEL, J-SERIES	VALUE 14	
M.89F(0)	SUBLABEL	5	CR	J14.0I	SUBLABEL, J-SERIES	0	
	TRACK NUMBER	AT	CR	J14.0I	TRACK NUMBER, REFERENCE	RX	G13
	ACTION	0	None	NA	NA	NA	
	X COORDINATE	AT	CR	J14.0C2	LATITUDE, 0.0051 MINUTE LONGITUDE, 0.0051 MINUTE	RX RX	G9
	Y COORDINATE	AT	CR	J14.0C2	LATITUDE, 0.0051 MINUTE LONGITUDE, 0.0051 MINUTE	RX RX	G9
	LABEL	8	CR	J14.0I	LABEL, J-SERIES SUBLABEL, J-SERIES	14 0	
	MINUTES	RX	=	J14.0I	MINUTE	RX	
	HOURS	RX	=	J14.0I	HOUR	RX	
	CATEGORY/PLATFORM	AT	CR	J14.0I	ENVIRONMENT/CATEGORY	RX	1
	SOURCE	1	None	NA	NA	NA	
	SQUARE/CIRCLE SWITCH	AT	CR	J14.0I	SQUARE/CIRCLE SWITCH	RX	2
	PROBABILITY FACTOR	2	None	NA	NA	NA	
	BEARING, ORIENTATION	AT	CR	J14.0C2	AXIS ORIENTATION	RX	G17
	MINOR AXIS	AT	CR	J14.0C2	AREA MINOR AXIS	RX	G18
	MAJOR AXIS	AT	CR	J14.0C2	AREA MAJOR AXIS	RX	G18

C-803

APPENDIX C

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.9F-3. M.9F(0)/M.89F(0) Message Data Element Translation from the J14.0 Message (Sheet 2 of 2)

NOTES

1. Category/Platform is determined from the J14.0I Environment/Category field as follows:

Link 11/11B	Link 16
CATEGORY/PLATFORM	ENVIRONMENT/CATEGORY
0 - NO STATEMENT	0 - NO STATEMENT/UNKNOWN
1 - AIR	5 - LAND (GROUND)
2 - SURFACE	1 - SPACE
3 - SUBSURFACE	2 - AIR
	3 - SURFACE (MARITIME)
	4 - SUBSURFACE (MARITIME)

2. The Square/Circle Switch is determined as follows:

Link 11/11B	Link 16
SQUARE/CIRCLE SWITCH	SQUARE/CIRCLE SWITCH
0 - SQUARE/RECTANGLE	1 - SQUARE/RECTANGULAR
1 - CIRCLE/ELLIPSE	2 - CIRCULAR/ELLIPTICAL

TABLE C.5.2-M.9F-4. M.9F(1) Message Data Element Translation from the J3.0 Message (Sheet 1 of 2)

Link 11/11B					Link 16		
MESSAGE	FIELD	VALUE	TRANSLATION		DATA ELEMENT	VALUE	NOTES
M.9F(1)	LABEL	9	REQUIRED	WORD	LABEL, J-SERIES	3	
	SUBLABEL	5	CR	J3.0I	SUBLABEL, J-SERIES	0	
	TRACK NUMBER	AT	CR	J3.0I	TRACK NUMBER, REFERENCE	RX	G13
	SWITCH	AR	None	NA	NA	NA	1
	SCALE INDICATOR	AT	CR	J3.0C2	COURSE SPEED	RX RX	2, G7
	ACTION	1	None	NA	NA	NA	
	X DOT	AT	CR	J3.0C2	COURSE SPEED	RX RX	G7
	Y DOT	AT	CR	J3.0C2	COURSE SPEED	RX RX	G7
	EXPANSION/CONTRACTION RATE	127	None	NA	NA	NA	
	EXPANSION/CONTRACTION SWITCH	0	None	NA	NA	NA	
	RELATED TRACK NUMBER	AT	CR	J3.0C2	TRACK NUMBER, RELATED	RX	G13

C-805

APPENDIX C

TABLE C.5.2-M.9F-4. M.9F(1) Message Data Element Translation from the J3.0 Message (Sheet 2 of 2)

NOTES

1. If J3.0C2 Course or Speed and Related Track Number are other than No Statement, two M.9F(AC=1) messages shall be forwarded; the first with Switch = 0 and the second with Switch = 1. Otherwise, Switch shall be set to zero to report velocity or to one to report Related Track Number.
2. The Scale Indicator (SI) in the M.9F(AC=1) is determined as follows:
 - o SI = 0, track velocities are reported in 225/256 data miles/hour increments up to 111 159/256 data miles/hour.
 - o SI = 1, track velocities are reported in 28 1/8 data miles/hour increments up to 3571 7/8 data miles/hour.

The FJU may forward all velocities with Scale Indicator set to 1.

TABLE C.5.2-M.9F-5. M.9F(1) Message Data Element Translation from the J3.7 Message (Sheet 1 of 2)

Link 11/11B					Link 16		
MESSAGE	FIELD	VALUE	TRANSLATION		DATA ELEMENT	VALUE	NOTES
M.9F(1)	LABEL	9	REQUIRED	WORD	LABEL, J-SERIES	3	
	SUBLABEL	5	CR	J3.7I	SUBLABEL, J-SERIES	7	
	TRACK NUMBER	AT	CR	J3.7I	TRACK NUMBER, REFERENCE	RX	G13
	SWITCH	0	None	NA	NA	NA	1
	SCALE INDICATOR	AR	CR	J3.7C3	COURSE SPEED	RX RX	2, G7
	ACTION	1	None	NA	NA	NA	
	X DOT	AT	CR	J3.7C3	COURSE SPEED	RX RX	G7
	Y DOT	AT	CR	J3.7C3	COURSE SPEED	RX RX	G7
	EXPANSION/CONTRACTION RATE	127	None	NA	NA	NA	
	EXPANSION/CONTRACTION SWITCH	0	None	NA	NA	NA	
	RELATED TRACK NUMBER	0	None	NA	NA	NA	

APPENDIX C

TABLE C.5.2-M.9F-5. M.9F(1) Message Data Element Translation from the J3.7 Message (Sheet 2 of 2)

NOTES

1. The M.9F(AC=1) Switch value is always set to 0. The M.9F(AC=1, SW=1) message containing Related Track Number cannot be derived from the J3.7 message.

2. The Scale Indicator (SI) in the M.9F(AC=1) is determined as follows:

- o SI = 0, track velocities are reported in 225/256 data miles/hour increments up to 111 159/256 data miles/hour.

- o SI = 1, track velocities are reported in 28 1/8 data miles/hour increments up to 3571 7/8 data miles/hour.

The FJU may forward all velocities with Scale Indicator set to 1.

TABLE C.5.2-M.9F-6. M.9F(1) Message Data Element Translation from the J14.0 Message (Sheet 1 of 2)

Link 11/11B					Link 16		
MESSAGE	FIELD	VALUE	TRANSLATION		DATA ELEMENT	VALUE	NOTES
M.9F(1)	LABEL	9	REQUIRED	WORD	LABEL, J-SERIES	14	
	SUBLABEL	5	CR	J14.0I	SUBLABEL, J-SERIES	0	
	TRACK NUMBER	AT	CR	J14.0I	TRACK NUMBER, REFERENCE	RX	G13
	SWITCH	0	None	NA	NA	NA	1
	SCALE INDICATOR	AR	CR	J14.0C1	COURSE SPEED	RX RX	2, G7
	ACTION	1	None	NA	NA	NA	
	X DOT	AT	CR	J14.0C1	COURSE SPEED	RX RX	G7
	Y DOT	AT	CR	J14.0C1	COURSE SPEED	RX RX	G7
	EXPANSION/CONTRACTION RATE	127	None	NA	NA	NA	
	EXPANSION/CONTRACTION SWITCH	0	None	NA	NA	NA	
	RELATED TRACK NUMBER	AT	None	NA	NA	NA	

APPENDIX C

TABLE C.5.2-M.9F-6. M.9F(1) Message Data Element Translation from the J14.0
Message (Sheet 2 of 2)

NOTES

1. The M.9F(AC=1) Switch value shall always be set to value 0. The M.9F(AC=1, SW=1) message (containing Related Track Number) shall not be derived from the J14.0 message.
2. The Scale Indicator (SI) in the M.9F(AC=1) is determined as follows:
 - o SI = 0, track velocities are reported in 225/256 data miles/hour increments up to 111 159/256 data miles/hour.
 - o SI = 1, track velocities are reported in 28 1/8 data miles/hour increments up to 3571 7/8 data miles/hour.

The FJU may forward all velocities with Scale Indicator set to 1.

TABLE C.5.2-M.10A-1. M.10A Message Data Element Translation from the J9.0 Message (Sheet 1 of 3)

Link 11/11B					Link 16		
MESSAGE	FIELD	VALUE	TRANSLATION		DATA ELEMENT	VALUE	NOTES
M.10A	LABEL	10	REQUIRED	WORD	LABEL, J-SERIES	9	1
			CR	J9.0I	SUBLABEL, J-SERIES	0	
	PU/RU ADDRESSEE	AT	CR	J9.0I	TRACK NUMBER, ADDRESSEE	RX	G12
	SUBLABEL	0	CR	J9.0I	SUBLABEL, J-SERIES	0	
	ORDER	AT	CR	J9.0I	COMMAND	RX	2
	CANTPRO AMP	AT	CR	J9.0I	RECEIPT/COMPLIANCE	RX	3
	ORDER/CANCELLATION INDICATOR	0	None	NA	NA	NA	
	RECEIPT/COMPLIANCE	AT	CR	J9.0I	RECEIPT/COMPLIANCE	RX	3
	TRACK NUMBER ONE	AT	CR	J9.0I	COMMAND	RX	5
				J9.0E0	TRACK NUMBER, ADDRESSEE	RX	G13
					TRACK NUMBER, FRIENDLY WEAPON	RX	G13
	TRACK NUMBER TWO	AT	CR	J9.0I or HEADER	TRACK NUMBER, OBJECTIVE	RX	4, G13
					TRACK NUMBER, SOURCE	RX	4, G2, G12

C-811

APPENDIX C

MIL-STD-6016B

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.10A-1. M.10A Message Data Element Translation from the J9.0 Message (Sheet 2 of 3)

NOTES

1. The M.10A message may be derived from the J9.0 message or J10.3 message.
2. The M.10A Order value is derived from the J9.0 Command field as follows:

Link 11/11B	Link 16
ORDER	COMMAND
2	20
3	21
4	22

3. The Receipt/Compliance value in the J9.0 message will be reported on Link 11/11B in the Receipt/Compliance field of the M.10A message as follows:

Link 11/11B	Link 16
RECEIPT/COMPLIANCE	RECEIPT/COMPLIANCE
0	0
3	3 or 4
6	6
7	7-22

The M.10A message CANTPRO AMP is set to 0 with the exception of those cases where the Receipt/Compliance value is 16 through 22. In the latter case, set the M.10A message Receipt/Compliance to 7 and the CANTPRO AMP as follows:

Link 11/11B	Link 16
CANTPRO AMP	RECEIPT/COMPLIANCE
1	16
2	17
3	18
4	19
5	20
6	21
7	22

4. When forwarding to Link 11, the Track Number Two (TN-2) field shall be set to the Track Number, Objective as translated. When forwarding to Link 11B, TN-2 shall be set to the source of the J9.0 or the J9.0 R/C message.

APPENDIX C

TABLE C.5.2-M.10A-1. M.10A Message Data Element Translation from the J9.0
Message (Sheet 3 of 3)

NOTES (Continued)

5. If the received J9.0 Command is value 20 or 21, and Friendly Weapon TN is non-zero, M.10A Track Number One (TN-1) is determined from the J9.0 Friendly Weapon TN. If the received J9.0 Command is value 21 and Friendly Weapon TN = 00000, TN-1 is determined from J9.0 Addressee TN. If the received J9.0 Command is value 22, TN-1 shall be set to 0000.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-M.10A-2. M.10A Message Data Element Translation from the J10.3 Message (Sheet 1 of 3)

<u>MESSAGE</u> M.10A	Link 11/11B		TRANSLATION			Link 16	
	<u>FIELD</u>	<u>VALUE</u>	<u>REQUIRED</u>	<u>WORD</u>	<u>DATA ELEMENT</u>	<u>VALUE</u>	<u>NOTES</u>
	<u>LABEL</u>	<u>10</u>	<u>CR</u>	<u>J10.3I</u>	<u>LABEL, J-SERIES</u> SUBLABEL, J-SERIES	<u>10</u> 3	<u>1</u>
	PU/RU ADDRESSEE	AT	CR	J10.3I	TRACK NUMBER, ADDRESSEE	RX	G12
	SUBLABEL	0	CR	J10.3I	SUBLABEL, J-SERIES	3	
	ORDER	AT	CR	J10.3I	REQUEST FOR ASSUME CONTROL	RX	2
	CANTPRO AMP	AT	CR	J10.3I	RECEIPT/COMPLIANCE	RX	3
	ORDER/CANCELLATION INDICATOR	RX	=	J10.3I	CANCELLATION INDICATOR	RX	
	RECEIPT/COMPLIANCE	AT	CR	J10.3I	RECEIPT/COMPLIANCE	RX	3
	TRACK NUMBER ONE	AT	CR	J10.3I	TRACK NUMBER, REFERENCE	RX	G13
	TRACK NUMBER TWO	AT	CR	J10.3I or HEADER	REQUEST FOR ASSUME CONTROL TRACK NUMBER, OBJECTIVE TRACK NUMBER, SOURCE	RX RX RX	4 G13 G2, G12

APPENDIX C

TABLE C.5.2-M.10A-2. M.10A Message Data Element Translation from the J10.3 Message (Sheet 2 of 3)

NOTES

1. The M.10A message may be derived from the J9.0 message or the J10.3 message.

2. The M.10A message Order value is derived from the J10.3 Request for Assume Control field as follows:

Link 11/11B	Link 16
ORDER	REQUEST FOR ASSUME CONTROL
0	0
1	1
6	2

3. The Receipt/Compliance value in the J10.3 message will be reported on Link 11/11B in the Receipt/Compliance field of the M.10A message as follows:

Link 11/11B	Link 16
RECEIPT/COMPLIANCE	RECEIPT/COMPLIANCE
0	0
3	3
6	6
7	7-22

The M.10A message CANTPRO AMP is set to 0 with the exception of those cases where the J10.3 Receipt/Compliance value is 16 through 22. In the latter case set the M.10A message Receipt/Compliance (R/C) to 7 and the CANTPRO AMP as follows:

Link 11/11B	Link 16
CANTPRO AMP	RECEIPT/COMPLIANCE
1	16
2	17
3	18
4	19
5	20
6	21
7	22

4. Normally, if the J10.3 Request for Assume Control = 2, the Track Number, Two (TN-2) field will be set to the Header word Source TN as translated, or

APPENDIX C

TABLE C.5.2-M.10A-2. M.10A Message Data Element Translation from the J10.3 Message (Sheet 3 of 3)

NOTES (Continued)

4. (Continued)

if the J10.3 Request for Assume Control = 0 or 1, TN-2 will be set to the Track Number, Objective as translated. When forwarding to Link 11B, there are two exceptions:

a. TN-2 is set to the address of the unit originating a reply of R/C = 3, 6 or greater than 6.

b. TN-2 is set to the address of the originally addressed unit in the M.10A(R/C=0) message when the forwarding unit originates a CANTPRO.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-M.11B. M.11B Message Data Element Translation from Link 16 (Sheet 1 of 5)

Link 11/11B					Link 16		
<u>MESSAGE</u> M.11B	<u>FIELD</u> LABEL	<u>TRANSLATION</u>			<u>DATA ELEMENT</u> LABEL, J-SERIES	<u>VALUE</u> 13	<u>NOTES</u>
		<u>VALUE</u> 11	<u>REQUIRED</u> CR	<u>WORD</u> J13.2I			
	SUBLABEL	1	CR	J13.2I	SUBLABEL, J-SERIES	2	
	TRACK NUMBER	AT	CR	J13.2I	TRACK NUMBER, REFERENCE	RX	G13
	FUEL/TIME SWITCH	AT	CR	J13.2I	FUEL FUNCTION FUEL TIME REPORT FUNCTION MINUTE HOUR	RX RX RX RX RX	1
	ORDNANCE A	0	None	NA	NA	NA	
	ORDNANCE B	0	None	NA	NA	NA	
	ORDNANCE C	0	None	NA	NA	NA	
	ORDNANCE D	AT	CR	J13.2C2	GUN CAPABLE	RX	2
	WEAPON TYPE	AT	CR	J13.2C2	TYPE OF STORES, 1 TYPE OF STORES, 2 TYPE OF STORES, 3 TYPE OF STORES, 4 NUMBER OF STORES, 1 NUMBER OF STORES, 2 NUMBER OF STORES, 3 NUMBER OF STORES, 4 GUN CAPABLE	RX RX RX RX RX RX RX RX RX	3 3 3 3 3 3 3 3 3
				J13.2C7	TYPE OF STORES, 5 TYPE OF STORES, 6 TYPE OF STORES, 7 TYPE OF STORES, 8 NUMBER OF STORES, 5 NUMBER OF STORES, 6 NUMBER OF STORES, 7 NUMBER OF STORES, 8	RX RX RX RX RX RX RX RX	3 3 3 3 3 3 3 3
	FUEL/TIME	AT	CR	J13.2I	FUEL FUNCTION FUEL TIME REPORT FUNCTION MINUTE HOUR	0 RX 4 RX RX	1, 4 1, 5

TABLE C.5.2-M.11B. M.11B Message Data Element Translation from Link 16 (Sheet 2 of 5)

Link 11/11B				Link 16			
<u>MESSAGE</u>	<u>FIELD</u>	<u>TRANSLATION</u>			<u>DATA ELEMENT</u>	<u>VALUE</u>	<u>NOTES</u>
		<u>VALUE</u>	<u>REQUIRED</u>	<u>WORD</u>			
M.11B	AIRCRAFT TYPE	AT	CR	J13.2C1	AIR SPECIFIC TYPE	RX	6
(Cont'd)							

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.11B. M.11B Message Data Element Translation from Link 16
(Sheet 3 of 5)

NOTES

1. If fuel data are received the Fuel/Time Switch (FT SW) is set to 0. If time data are received, the FT SW is set to 1. If both fuel and time data are received, two M.11B messages are required to forward the data. In the latter case, all fields with the exception of FT SW and Fuel/Time will be set to identical values for both transmissions. If neither Fuel nor Time data are received, the M.11B message is forwarded with FT SW set to 0.

2. The J13.2 Gun Capable will be reported in the M.11B Ordnance D field as follows:

Link 11/11B	Link 16
ORDNANCE D	GUN CAPABLE
0	0
2	1

3. The M.11B Weapon Type provides the capability to show the simple presence or absence of a particular group of air-to-air weapons. The J13.2 indicates a specific type of weapon in a Type of Stores field and the quantity of that weapon being carried in the related Number of Stores field. As many as eight separate weapons may be reported. There are no restrictions as to which weapon will be shown in which of the eight available fields. It would be possible that Type of Stores, 3 would show a weapon while Type of Stores 1, 2, and 4 were No Statement. It is also possible that a Type of Stores will be reported in the J13.2 message with the related Number of Stores field set to 0. In this case, the related Weapon Type will be forwarded as 0. Bit 32 of the M.11B will always be forwarded as zero. Bit 34 of the M.11B will be set to 1 if the J13.2C2 Gun Capable bit is one. The remaining conditions for setting the individual Weapon Type bits to value one are:

Link 11/11B	Link 16	
WEAPON TYPE	TYPE OF STORES, 1-8	NUMBER OF STORES, 1-8
BIT 33 = 1	1	1 - 63
	11	1 - 63

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.11B. M.11B Message Data Element Translation from Link 16
(Sheet 4 of 5)

NOTES (Continued)

3. (Continued)

<u>Link 11/11B</u>	<u>Link 16</u>	
<u>WEAPON TYPE</u>	<u>TYPE OF STORES, 1-8</u>	<u>NUMBER OF STORES, 1-8</u>
BIT 34 = 1	2	1 - 63
BIT 35 = 1	3	1 - 63

4. If the J13.2 Fuel Function is received as value 1, fuel data are not forwarded in the M.11B message. Fuel is reported in 400-pound increments in the M.11B and 100-pound increments in the J13.2. Fuel values 0, 1, 2, 3, and 4095 of the J13.2 will be forwarded as value 0 in the M.11B. Fuel values 4 through 507 of the J13.2 will be translated to the direct equivalent or the next lower M.11B Fuel/Time value. Example; J13.2 values 4, 5, 6, and 7 are translated to M.11B value 1 (400 pounds). J13.2 Fuel values 508 or greater will all be translated to M.11B Fuel/Time value 127.

5. If the J13.2 Time Report Function (TRF) is received as other than value 4, time data are not forwarded in the M.11B message. Zero hours and zero minutes through two hours and six minutes are converted to minutes and forwarded as received. All values for two hours and seven minutes or greater are forwarded as value 127.

6. The M.11B Aircraft Type field is determined from the J13.2C1 Air Specific Type field as follows:

<u>Link 11/11B</u>	<u>Link 16</u>
<u>AIRCRAFT TYPE</u>	<u>AIR SPECIFIC TYPE</u>
0 - NO STATEMENT	0 - NO STATEMENT
	ALL VALUES NOT LISTED BELOW
1 - F-4	1 - F-4 PHANTOM II
2 - F-8	3 - F-8 CRUSADER
3 - F-14	4 - F-14 TOMCAT
4 - F-15	5 - F-15 EAGLE
5 - F-101	7 - F-101 VOODOO

APPENDIX C

TABLE C.5.2-M.11B. M.11B Message Data Element Translation from Link 16
(Sheet 5 of 5)

NOTES (Continued)

6. (Continued)

Link 11/11B	Link 16
AIRCRAFT TYPE	AIR SPECIFIC TYPE
6 - F-102	14 - F-102
7 - F-104	8 - F-104 STARFIGHTER
8 - F-106	10 - F-106 DELTA DART
9 - F-111	11 - F-111 (GENERAL DYNAMICS)
11 - A-4	256 - A-4 SKYHAWK
13 - A-6	257 - A-6 INTRUDER
14 - A-7	258 - A-7 CORSAIR II
15 - AV-8	264 - AV-8 HARRIER
16 - A-10	259 - A-10 THUNDERBOLT II
17 - F-16	6 - F-16 FIGHTING FALCON
18 - F-18	12 - F/A-18 HORNET
19 - A-18	265 - F/A-18 HORNET
20 - F-5	2 - F-5 TIGER II
	24-26 - DISUSED

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-M.11C. M.11C Message Data Element Translation from Link 16 (Sheet 1 of 6)

Link 11					Link 16		
MESSAGE	FIELD	TRANSLATION			DATA ELEMENT	VALUE	NOTES
		VALUE	REQUIRED	WORD			
M.11C	LABEL	11	CR	J13.2I	LABEL, J-SERIES	13	
	SUBLABEL	2	CR	J13.2I	SUBLABEL, J-SERIES	2	
	TRACK NUMBER	AT	CR	J13.2I	TRACK NUMBER, REFERENCE	RX	G13
	TIME REMAINING	AT	CR	J13.2I	TIME REPORT FUNCTION	RX	1
					MINUTE	RX	
					HOUR	RX	
	B-FRAME SWITCH	AR	None	NA	NA	NA	2
	SENSOR STATUS	RX	=	J13.2C3	RADAR STATUS INDICATOR	RX	3
					ELECTRONIC WARFARE SUPPORT, STATUS	RX	3
					INFRARED STATUS INDICATOR	RX	3
					LOW FREQUENCY ANALYSIS AND RECORDING STATUS	RX	3
					MAGNETIC ANOMALY DETECTOR STATUS	RX	3
					SEARCH LIGHT STATUS	RX	3
					LOW LIGHT LEVEL TELEVISION STATUS	RX	3
					DIFAR/CODAR STATUS	RX	3
					ACTIVE SONOBUOY STATUS	RX	3
					RECORDER STATUS, 1	RX	3
					RECORDER STATUS, 2	RX	3
					RECORDER STATUS, 3	RX	3
					RECORDER STATUS, 4	RX	3
					SONAR STATUS	RX	3
					SPECIAL SONOBUOY STATUS, 1	RX	3
					SPECIAL SONOBUOY STATUS, 2	RX	3
					SPECIAL PROCESSOR STATUS, 1	RX	3
					SPECIAL PROCESSOR STATUS, 2	RX	3
	CONVENTIONAL DEPTH BOMB INVENTORY	RX	=	J13.2C3	CONVENTIONAL DEPTH BOMB INVENTORY	RX	
	SPECIAL DEPTH BOMB INVENTORY	RX	=	J13.2C3	SPECIAL DEPTH BOMB INVENTORY	RX	
	CONVENTIONAL TORPEDO INVENTORY	RX	=	J13.2C3	CONVENTIONAL TORPEDO INVENTORY	RX	

TABLE C.5.2-M.11C. M.11C Message Data Element Translation from Link 16 (Sheet 2 of 6)

<u>MESSAGE</u> M.11C (Cont'd)	Link 11		TRANSLATION		Link 16		<u>NOTES</u>
	<u>FIELD</u>	<u>VALUE</u>	<u>REQUIRED</u>	<u>WORD</u>	<u>DATA ELEMENT</u>	<u>VALUE</u>	
	SPECIAL TORPEDO INVENTORY	RX	=	J13.2C3	SPECIAL TORPEDO INVENTORY	RX	
	CONVENTIONAL MISSILE INVENTORY	RX	=	J13.2C3	CONVENTIONAL MISSILE INVENTORY	RX	
	SPECIAL MISSILE INVENTORY	RX	=	J13.2C3	SPECIAL MISSILE INVENTORY	RX	
	ROCKET INVENTORY	RX	=	J13.2C3	ROCKET INVENTORY	RX	
	ACTIVE SONOBUOY INVENTORY	RX	=	J13.2C3	ACTIVE SONOBUOY INVENTORY	RX	
	PASSIVE SONOBUOY INVENTORY	RX	=	J13.2C3	PASSIVE SONOBUOY INVENTORY	RX	
	AIRCRAFT TYPE	AT	CR	J13.2C1	AIR SPECIFIC TYPE AIRCRAFT MODEL	RX RX	4
	ALTITUDE FOR WATCH	AT	CR	J13.2C3	RADAR WATCH ALTITUDE	RX	5
	FUEL	AT	CR	J13.2I	FUEL FUNCTION FUEL	0 RX	6

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.11C. M.11C Message Data Element Translation from Link 16
(Sheet 3 of 6)

NOTES

1. Time Remaining value 2 shall be forwarded if the Time Report Function (TRF) is 3. Time Remaining value 0 shall be forwarded if the TRF is 0, 1, or 4, or if the TRF is 5 and Minute and Hour are No Statement. Where TRF is 5, the present time of day will be subtracted from the reported Depart Station Time; if the time is positive, it gives time remaining until the aircraft is due to depart station; if the result is negative time, Time Remaining value 1 - Returning to Base shall be forwarded. Time Remaining on Station derived from TRF 5 shall be translated as follows:

Link 11	Link 16	
TIME REMAINING	MINUTE	HOUR
0 - NO STATEMENT	63	31
3 - 0 THROUGH 15 MINUTES	0 - 15	0
4 - 16 THROUGH 30 MINUTES	16 - 30	0
5 - 31 THROUGH 45 MINUTES	31 - 45	0
6 - 46 MINUTES THROUGH 1 HOUR	46 - 59	0
	0	1
7 - LONGER THAN 1 HOUR THROUGH 1.5 HOURS	1 - 30	1
8 - LONGER THAN 1.5 HOURS THROUGH 2 HOURS	31 - 59	1
	0	2
9 - LONGER THAN 2 HOURS THROUGH 2.5 HOURS	1 - 30	2
10 - LONGER THAN 2.5 HOURS THROUGH 3 HOURS	31 - 59	2
	0	3
11 - LONGER THAN 3 HOURS THROUGH 4 HOURS	1 - 59	3
	0	4
12 - LONGER THAN 4 HOURS THROUGH 6 HOURS	1 - 59	4
	0-59	5

APPENDIX C

TABLE C.5.2-M.11C. M.11C Message Data Element Translation from Link 16
(Sheet 4 of 6)

NOTES (Continued)

1. (Continued)

Link 11	Link 16	
TIME REMAINING	MINUTE	HOUR
	0	6
13 - LONGER THAN 6 HOURS THROUGH 8 HOURS	1 - 59	6
	0 - 59	7
	0	8
14 - LONGER THAN 8 HOURS THROUGH 10 HOURS	1 - 59	8
	0 - 59	9
	0	10
15 - LONGER THAN 10 HOURS	1 - 59	10
	0-59	11 - 23

2. As many as three M.11C messages, with different B-Frames and B-Frame Switch (BSW) values, may be required to forward a single J13.2 message. If more than one M.11C message is forwarded from one J13.2 message, the Time Remaining field will be set to an identical value in each M.11C transmitted.

If the J13.2C3 bits 26-43 are other than No Statement, set the BSW to 0. If the J13.2C3 Conventional Depth Bomb Inventory, Special Depth Bomb Inventory, Conventional Torpedo Inventory, Special Torpedo Inventory, Conventional Missile Inventory, Special Missile Inventory, Rocket Inventory, Active Sonobuoy Inventory, or Passive Sonobuoy Inventory field(s) is (are) other than No Statement, or if Air Specific Type and Aircraft model are translatable to other than No Statement in Aircraft Type, set the BSW to 1. If the J13.2I Fuel or the J13.2C3 Radar Watch Altitude are translatable to Fuel or Altitude for Watch, then set the BSW to 2.

3. The Sensor Status, bit positions 26 through 43 of the M.11C, shall be set identically to those received in bit positions 26 through 43 of the J13.2C3. When forwarding Sensor Status, bits 44 through 47 are transmitted as zero.

4. The J13.2 Air Specific Type and Aircraft Model will be translated to the M.11C Aircraft Type as follows:

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.11C. M.11C Message Data Element Translation from Link 16
(Sheet 5 of 6)

NOTES (Continued)

4. (Continued)

Link 11	Link 16	
AIRCRAFT TYPE	AIR SPECIFIC TYPE	AIRCRAFT MODEL
0 - NO STATEMENT	ALL VALUES NOT LISTED BELOW	ALL
1 - MARITIME PATROL AIRCRAFT	532 - P-2 NEPTUNE	ALL
	533 - P-3 ORION	ALL EXCEPT 1,2,3
	565 - BN-2 MARITIME DEFENDER	ALL
2 - P-3A/P-3B	533 - P-3 ORION	1 - A or 2 - B
3 - P-3C		3 - C
4 - NIMROD	570 - HS.801 NIMROD	ALL
5 - VS (FW, ASW GENERAL)	543 - S-2 TRACKER	ALL EXCEPT 5
	569 - HS.748 COASTGUARDER	ALL
6 - S-2E	575 - SS-2	ALL
7 - S-3	543 - S-2 TRACKER	5 - E
8 - ASW HELO (GENERAL)	544 - S-3 VIKING	ALL
	1297 - SH-2 SEA SPRITE	ALL
	1298 - SH-3 SEA KING	ALL
	1299 - SH-60 SEA HAWK	ALL
	1311 - CH-124 SEA KING	ALL
	1345 - KA-27 HELIX-A (ASW)	ALL
11 - BREGUET ATLANTIQUE	563 - BR 1150 ATL1	ALL
12 - AURORA	568 - CP-140 AURORA	ALL

5. Altitude for Watch of the M.11C message reports the best altitude for radar watch in 500-foot increments. The Radar Watch Altitude reports the same information in 100-foot increments. The J13.2 Radar Watch Altitude will be translated to the nearest 500-foot increment in the M.11C; e.g., 800 through 1,200 will be translated to 1,000 feet. J13.2 Radar Watch altitudes above 31,700 feet will be translated to 0 (No Statement) in the M.11C message.

6. If the J13.2 Fuel Function is received as value 1, fuel data are not forwarded in the M.11C message. Fuel is reported in 400-pound increments in

APPENDIX C

TABLE C.5.2-M.11C. M.11C Message Data Element Translation from Link 16
(Sheet 6 of 6)

NOTES (Continued)

6. (Continued)

the M.11C message and 100-pound increments in the J13.2 message. Fuel values 0, 1, 2, 3, and 4095 of the J13.2 message will be forwarded as zero in the M.11C message. Fuel values 4 through 507 of the J13.2 message will be translated to the directly equivalent or next lower M.11C Fuel value. For example, 400, 500, 600, and 700 pounds of fuel are all translated to M.11C value 1 (400 pounds). J13.2 Fuel values 508 or greater will all be translated to M.11C value 127.

TABLE C.5.2-M.11D-1. M.11D Message Data Element Translation from the J2.X Message (Sheet 1 of 2)

Link 11/11B				Link 16			
MESSAGE	FIELD	TRANSLATION			DATA ELEMENT	VALUE	NOTES
M.11D	LABEL	VALUE 11	REQUIRED CR	WORD J2.xI	LABEL, J-SERIES	2	1
	SUBLABEL	3	CR	J2.xI	SUBLABEL, J-SERIES	0, 2-4	
	TRACK NUMBER	AT	CR	J2.xI	TRACK NUMBER, REFERENCE	RX	
	SWITCH	AR	None	NA	NA	NA	2
	MODE IV INDICATOR	RX	=	J2.xC1	MODE IV INDICATOR	RX	
	TYPE REPORT	0	None	NA	NA	NA	1
	MODE II CODE	RX	=	J2.xC1	MODE II CODE	RX	
	MODE I CODE	AT	CR	J2.xC1	MODE I CODE	RX	3
	MODE III CODE	RX	=	J2.xC1	MODE III CODE	RX	

APPENDIX C

TABLE C.5.2-M.11D-1. M.11D Message Data Element Translation from the J2.X Message (Sheet 2 of 2)

NOTES

1. The M.11D(TR=0) message is translated from the J2.x messages as specified below:

- o J2.0, J2.2, J2.3, J2.4 (Modes I/II/III).
- o The M.11D(TR=1) message is translated from the J7.5 message.

2. Two M.11D messages are necessary to report all possible IFF/SIF data associated with a specific track. Switch (SW) = 0 indicates Modes I and II; SW = 1 indicates Modes II and III.

3. Valid Mode I codes for data link exchange shall range from 01 through 73 (octal) with 31 possible values, those values with the least significant digit greater than 3 not being used. The Mode I field of the M.11D IFF Codes are in the order A4, A2, A1, B4, B2, B1 with the most significant bit A4 in bit position 47. B4 is never set since the second digit never exceeds 3. The Mode I Code field of the J2.0C1, J2.2C1, J2.3C1, and J2.4C1 IFF Codes are in the order A4, A2, A1, B2, B1 with the most significant bit A4 in bit position 12.

TABLE C.5.2-M.11D-2. M.11D Message Data Element Translation from the J3.X Message (Sheet 1 of 2)

Link 11/11B			Link 16				
<u>MESSAGE</u> M.11D	<u>FIELD</u> LABEL	<u>TRANSLATION</u>			<u>DATA ELEMENT</u> LABEL, J-SERIES	<u>VALUE</u> 3	<u>NOTES</u> 1
		<u>VALUE</u> 11	<u>REQUIRED</u> CR	<u>WORD</u> J3.XI			
	SUBLABEL	3	CR	J3.XI	SUBLABEL, J-SERIES	1-5	
	TRACK NUMBER	AT	CR	J3.XI	TRACK NUMBER, REFERENCE	RX	
	SWITCH	AR	None	NA	NA	NA	2
	MODE IV INDICATOR	RX	=	J3.XC1	MODE IV INDICATOR	RX	
	TYPE REPORT	0	None	NA	NA	NA	1
	MODE II CODE	RX	=	J3.XC1	MODE II CODE	RX	
	MODE I CODE	AT	CR	J3.XC1	MODE I CODE	RX	3
	MODE III CODE	RX	=	J3.XC1	MODE III CODE	RX	

APPENDIX C

TABLE C.5.2-M.11D-2. M.11D Message Data Element Translation from the J3.X Message (Sheet 2 of 2)

NOTES

1. The M.11D(TR=0) message is translated from the J3.x messages as specified below:

- o J3.1, J3.2, J3.3, J3.4, J3.5 (Modes I/II/III/IV).
- o The M.11D(TR=1) message is translated from the J7.5 message.

2. Two M.11D messages are necessary to report all possible IFF/SIF data associated with a specific track. Switch (SW) = 0 indicates Modes I and II; SW = 1 indicates Modes II and III.

3. Valid Mode I codes for data link exchange shall range from 01 through 73 (octal) with 31 possible values, those values with the least significant digit greater than 3 not being used. The Mode I Code field of the M.11D IFF codes are in the order A4, A2, A1, B4, B2, B1 with the most significant bit A4 in bit position 47. B4 is never set since the second digit never exceeds

3. The Mode I Code field of the J3.x IFF Codes are in the order A4, A2, A1, B2, B1. The most significant bit A4 is located:

<u>Word</u>	<u>Bit Position</u>
J3.1C1	12
J3.2C1	12
J3.3C1	12
J3.4C1	38
J3.5C1	12

TABLE C.5.2-M.11D-3. M.11D Message Data Element Translation from the J7.5 Message (Sheet 1 of 2)

Link 11/11B				Link 16			
MESSAGE	FIELD	VALUE	TRANSLATION	DATA ELEMENT	VALUE	NOTES	
M.11D	LABEL	11	REQUIRED	LABEL, J-SERIES	7	1	
	SUBLABEL	3	CR	SUBLABEL, J-SERIES	5		
	TRACK NUMBER	AT	CR	TRACK NUMBER, REFERENCE	RX	G13	
	SWITCH	0	None	NA	NA		
	MODE IV INDICATOR	0	None	NA	NA		
	TYPE REPORT	1	CR	ACTION, IFF/SIF MANAGEMENT	3	1	
	SPECIAL CODE	RX	=	SPECIAL CODE II SPECIAL CODE III APPLICABILITY	RX 1	2	

APPENDIX C

TABLE C.5.2-M.11D-3. M.11D Message Data Element Translation from the J7.5 Message (Sheet 2 of 2)

NOTES

1. The M.11D(TR=1) message is translated from the J7.5 (ACT = 3) message. All other M.11D messages are translated from the J2.0, J2.2, J2.3, J2.4, J3.1, J3.2, J3.3, J3.4, or J3.5 message.

2. Special Codes I and III which may appear in the J7.5 (ACT = 3) message are not available in the M-Series messages.

TABLE C.5.2-M.11M. M.11M/M.811M Message Data Element Translation from the J6.0 Message (Sheet 1 of 18)

Link 11/11B					Link 16		
MESSAGE	FIELD	VALUE	TRANSLATION REQUIRED	WORD	DATA ELEMENT	VALUE	NOTES
M.11M	LABEL	11	CR	J6.0I	LABEL, J-SERIES SUBLABEL, J-SERIES	6 0	
	SUBLABEL	12	CR	J6.0I	LABEL, J-SERIES SUBLABEL, J-SERIES	6 0	
	SPECIAL PROCESSING INDICATOR	RX	=	J6.0I	SPECIAL PROCESSING INDICATOR	RX	G5
	TRACK NUMBER	AT	CR	J6.0I	TRACK NUMBER, REFERENCE	RX	G13
	CATEGORY	AT	CR	J6.0I	ENVIRONMENT/CATEGORY AIR PLATFORM	RX See Note 1	1
	NATIONALITY/ALLIANCE	AT	CR	J6.0I	NATIONALITY/ALLIANCE OF TRACK	RX	2
	SPECIFIC TYPE	AT	CR	J6.0I J6.0E0	ENVIRONMENT/CATEGORY AIR SPECIFIC TYPE SURFACE (MARITIME) SPECIFIC TYPE SUBSURFACE (MARITIME) SPECIFIC TYPE LAND (GROUND) SPECIFIC TYPE LAND GROUND PLATFORM	RX RX RX RX RX See Note 3	3, 4
	GENERAL TYPE	AT	CR	J6.0I J6.0E0	ENVIRONMENT/CATEGORY AIR PLATFORM SURFACE (MARITIME) PLATFORM SUBSURFACE (MARITIME) PLATFORM LAND (GROUND) PLATFORM AIR SPECIFIC TYPE LAND (GROUND) SPECIFIC TYPE	RX RX RX RX RX See Note 3 See Note 4	3, 4
	PU/RU ORIGINATOR	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	G2, G12
M.811M	LABEL	8	CR	J6.0I	LABEL, J-SERIES SUBLABEL, J-SERIES	6 0	

C-837

APPENDIX C

MIL-STD-6016B

TABLE C.5.2-M.11M. M.11M/M.811M Message Data Element Translation from the J6.0 Message (Sheet 2 of 18)

Link 11/11B					Link 16		
MESSAGE	FIELD	VALUE	TRANSLATION REQUIRED	WORD	DATA ELEMENT	VALUE	NOTES
M.811M (Cont'd)	MISSION	AT	CR	J6.0I	ENVIRONMENT/CATEGORY	RX	5
					AIR PLATFORM ACTIVITY	RX	
					SURFACE (MARITIME) PLATFORM ACTIVITY	RX	
					SUBSURFACE (MARITIME) PLATFORM ACTIVITY	RX	
					LAND (GROUND) PLATFORM ACTIVITY	RX	
					AIR PLATFORM	See Note 5	
	CURRENT ACTIVITY	AT	CR	J6.0I	ENVIRONMENT/CATEGORY	RX	6
					ACTIVITY AMPLIFICATION INDEX	RX	
					AIR PLATFORM	See Note 6	
	OPERATIONAL STATUS	RX	=	J6.0I	OPERATIONAL STATUS	RX	
	SWITCH	AT	CR	J6.0E0	LOCAL DISCRETE IDENTIFIER	RX	7
					TRACK NUMBER, CONTROLLING AGENCY OF TN REFERENCE	RX	
	TRACK NUMBER-2	AT	CR	J6.0E0	TRACK NUMBER, OBJECTIVE	RX	G13
	CONTROLLING UNIT	AT	CR	J6.0E0	TRACK NUMBER, CONTROLLING AGENCY OF TN REFERENCE	RX	7, G13
	DISCRETE IDENTIFIER	RX	=	J6.0E0	LOCAL DISCRETE IDENTIFIER	RX	7

C-838

APPENDIX C

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.11M. M.11M/M.811M Message Data Element Translation from the J6.0 Message (Sheet 3 of 18)

NOTES

1. The conversion from Environment/Category to Category is as follows:

<u>Link 11/11B</u> <u>CATEGORY</u>	<u>Link 16</u> <u>ENVIRONMENT/CATEGORY</u>
0 - NO STATEMENT/UNKNOWN	0 - NO STATEMENT/UNKNOWN
1 - AIR	2 - AIR (EXCEPT WITH AN AIR PLATFORM VALUE OF 13, 37-39 OR 41-45)
2 - SURFACE (OCEANIC)	3 - SURFACE (MARITIME)
3 - SUBSURFACE	4 - SUBSURFACE (MARITIME)
4 - LAND	5 - LAND (GROUND)
5 - MISSILE	2 - AIR (WITH AN AIR PLATFORM VALUE OF 13, 37-39 OR 41-45)

2. Nationality/Alliance is derived from Nationality/Alliance of Track as follows:

<u>Link 11/11B</u> <u>NATIONALITY/ALLIANCE</u>	<u>Link 16</u> <u>NATIONALITY/ALLIANCE OF TRACK</u>
0	0, 99-126
1-98	1-98
99	127

3. Link 11/11B Air Category General Type and Specific Type shall normally be translated from Link 16 Air Specific Type as shown below. However, if Air Specific Type data are unavailable, Link 11/11B General Type shall be derived from Link 16 Air Platform as shown in Note 4. Link 11/11B Surface, Subsurface, and Land Category Specific Type shall be derived from Link 16 Specific Type as shown below, except for some Link 11/11B land category specific types which are derived from the Link 16 Land (Ground) Platform and/or Land (Ground) Specific Type.

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.11M. M.11M/M.811M Message Data Element Translation from the J6.0 Message (Sheet 4 of 18)

NOTES (Continued)

3. (Continued)

Link 11/11B (AIR CATEGORY)		Link 16
GENERAL TYPE	SPECIFIC TYPE	AIR SPECIFIC TYPE
1	0	0, 3, 7, 9-18, 20-37, 40-44, 46-49, 51, 52, 56-60, 65, 67- 69, 72-255
	32	70
	33	71
	34	62
	35	63
	36	64
	37	50
	38	53
	39	66
	40	61
	41	1
	42	2
	43	4
	44	5
	45	6
	46	8
	47	38
	48	39
	63	4094
2	0	257, 259, 261, 263- 265, 269-288, 295, 323, 511
	36	45
	38	54
	39	55
	40	258
	43	256
	44	268
	47	267
	48	260
	63	4094
3	0	297 or 298
	32	294
	33	290
	34	291
	35	292
	36	289
	37	296
	38	293
	39	262
	40	266

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.11M. M.11M/M.811M Message Data Element Translation from the J6.0 Message (Sheet 5 of 18)

NOTES (Continued)

3. (Continued)

Link 11/11B (AIR CATEGORY)		Link 16
GENERAL TYPE	SPECIFIC TYPE	AIR SPECIFIC TYPE
4	63	4094
	0	0, 1281, 1282, 1284-1289, 1291, 1293, 1295-1299, 1301-1328, 1330-1332, 1335, 1337, 1338, 1340-1348, 1407-1535
	32	1333
	33	1334
	34	1336
	35	1292
	36	1290
	37	1300
	38	1294
	63	4094
	32	1329
	33	1339
	34	1280
5	63	4094
	0	0, 512-591, 593, 596, 600, 601, 603-635, 637-765, 767, 826-1026, 1029, 1032-1035, 1083-1086, 1088-1097, 1099-1103, 1105-1107, 1112-1115, 1199
	33	597-599, 1087
	35	1098
	36	592
7	37	1040
	38	595
	39	1109
	41	594
	42	1027
	43	1028
	44	1059
	45	1030
	46	1031
	47	1110
	48	768-825
	63	4094

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.11M. M.11M/M.811M Message Data Element Translation from the J6.0 Message (Sheet 6 of 18)

NOTES (Continued)

3. (Continued)

Link 11/11B (AIR CATEGORY)		Link 16	
GENERAL TYPE	SPECIFIC TYPE	AIR SPECIFIC TYPE	
8	0	1036-1039, 1041, 1045-1047, 1050, 1052-1058, 1060-1067, 1069, 1070, 1072-1082, 1202-1277, 1279	
	33	1108	
	34	1104	
	35	1098	
	36	1071	
	37	1040	
	38	1042	
	39	1043	
	40	1044	
	41	1049	
	42	1051	
	43	1048	
	44	1068	
	63	4094	
10	0	766	
14	0	602	
(SURFACE (OCEANIC) CATEGORY)			
SPECIFIC TYPE		SURFACE (MARITIME) SPECIFIC TYPE	
0		0	
63		4095	
(SUBSURFACE CATEGORY)			
SPECIFIC TYPE		SUBSURFACE (MARITIME) SPECIFIC TYPE	
0		0	
63		4095	
(LAND CATEGORY)			
GENERAL TYPE	SPECIFIC TYPE	LAND (GROUND) SPECIFIC TYPE	LAND (GROUND) PLATFORM
1	40	27	0-56, 58-63
	41	30	0-56, 58-63
	42	31	0-56, 58-63
	43	32	0-56, 58-63
	45	28	0-56, 58-63
	63	4094	0-56, 58-63
4	32	93	33
	33		32
	63	4094	0-56, 58-63

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.11M. M.11M/M.811M Message Data Element Translation from the J6.0 Message (Sheet 7 of 18)

NOTES (Continued)

3. (Continued)

<u>Link 11/11B</u>		<u>Link 16</u>	
<u>(LAND CATEGORY)</u>			
<u>GENERAL TYPE</u>	<u>SPECIFIC TYPE</u>	<u>LAND (GROUND) SPECIFIC TYPE</u>	<u>LAND (GROUND) PLATFORM</u>
7	0	226-228	0-56, 58-63
	32	90	40
	33		22
	35		24
	36		32
	63	4094	0-56, 58-63
8	32	114	0-56, 58-63
	33	123	0-56, 58-63
	35	154	0-56, 58-63
	63	4094	0-56, 58-63
10	32	92	11
	33		9
	35		16
	37		8
	38		33
	39		32
	63	4094	0-56, 58-63
11	33	172	0-56, 58-63
	34	77	0-56, 58-63
	63	4094	0-56, 58-63
12	32	71	0-56, 58-63
	33	70	0-56, 58-63
	34	69	0-56, 58-63
		72	0-56, 58-63
	35	64	0-56, 58-63
		66	0-56, 58-63
		68	0-56, 58-63
	63	4094	0-56, 58-63
	32	94	0-56, 58-63
	33	ALL	17
13	34	155	25
	35	All	48
	37	83	0-56, 58-63
	63	4094	0-56, 58-63

Any Link 16 Land (Ground) Specific Type values not listed here will translate to Link 11/11B Specific Type value 0 (No Statement).

Air Specific Type values of 1536-4093, and 4095 translate to 0 (No Statement), within the M.11M Missile Category Specific Type field.

APPENDIX C

TABLE C.5.2-M.11M. M.11M/M.811M Message Data Element Translation from the J6.0 Message (Sheet 8 of 18)

NOTES (Continued)

4. General Type is derived from the Link 16 Platform field, except in the Air Category General Type field, and the Land Category General Type field (where values 3, 4, 6, 7, 9, and 10 are derived from the Link 16 Land (Ground) Specific Type field). For Air Category, Link 11/11B General Type shall be derived from Link 16 Air Platform only if Link 16 Air Specific Type data are unavailable (See Note 3). The conversion to General Type is as follows:

Link 11/11B (AIR CATEGORY) GENERAL TYPE	Link 16 AIR PLATFORM
0 - NO STATEMENT	0 - NO STATEMENT
1 - FIGHTER/INTERCEPTOR	47 - 62 UNDEFINED
2 - FIGHTER/BOMBER ATTACK	1 - FIGHTER
3 - BOMBER	9 - INTERCEPTOR
4 - HELO	2 - FIGHTER BOMBER
	3 - ATTACK
	4 - BOMBER
	27 - HELICOPTER (HELO)
	30 - ANTISUBMARINE WARFARE HELICOPTER (ASW HELO)
	31 - MINE WARFARE HELICOPTER
	32 - TRANSPORT HELICOPTER
5 - ATTACK HELO	28 - ATTACK HELICOPTER
6 - DRONE/RPV	29 - HELICOPTER GUNSHIP
7 - SUPPORT	19 - DRONE
8 - CIVIL	20 - REMOTELY PILOTED VEHICLE (RPV)
	33 - TACTICAL SUPPORT
9 - PATROL	22 - CIVIL, AIRLINER
	23 - CIVIL, GENERAL
10 - AEW	17 - MARITIME PATROL AIRCRAFT (MPA)
14 - OTHER	34 - PATROL
	16 - AIRBORNE EARLY WARNING AND CONTROL (AEW)
	5 - RECONNAISSANCE
	6 - TANKER
	7 - TANKER (BOOM ONLY)
	8 - TANKER (DROGUE ONLY)
	10 - TRANSPORT
	11 - AIRBORNE COMMAND POST (ACP)
	12 - MISSILE CARRIER
	14 - ELECTRONIC WARFARE (EW)
	15 - ANTISUBMARINE WARFARE (ASW)

APPENDIX C

TABLE C.5.2-M.11M. M.11M/M.811M Message Data Element Translation from the J6.0 Message (Sheet 9 of 18)

NOTES (Continued)

4. (Continued)

Link 11/11B (AIR CATEGORY) GENERAL TYPE	Link 16 AIR PLATFORM
15 - RESET TO NO STATEMENT	18 - SEARCH AND RESCUE (SAR)
	21 - FIXED WING GUNSHIP
	24 - LIGHTER THAN AIR (LTA)
	25 - GLIDER
	26 - DECOY
	35 - MISCELLANEOUS FIXED WING
	36 - MISSILE CONTROL UNIT
	40 - LOGISTIC
	46 - AIRBORNE LAND SURVEILLANCE
	63 - RESET TO NO STATEMENT
(SURFACE (OCEANIC) CATEGORY) GENERAL TYPE	SURFACE (MARITIME) PLATFORM
0 - NO STATEMENT	0 - NO STATEMENT
	35-62 - UNDEFINED
1 - AIRCRAFT CARRIER	1 - AIRCRAFT CARRIER (CV)
2 - DESTROYER	4 - DESTROYER
3 - CRUISER	3 - CRUISER
	2 - BATTLESHIP
4 - FRIGATE	5 - FRIGATE
5 - PATROL	6 - FAST PATROL BOAT
	27 - PATROL
6 - MINE WARFARE	14 - MINE WARFARE SHIP
	15 - MINE COUNTERMEASURES MARITIME VESSEL (MCMV)
7 - AMPHIBIOUS	7 - AMPHIBIOUS
	8 - LHA/LHD
	9 - AMPHIBIOUS ASSAULT COMMAND SHIP (LCC)
	23 - LANDING PLATFORM
	24 - LANDING SHIP
	32 - AMPHIBIOUS GENERAL ASSAULT
8 - SUPPORT	28 - SUPPORT
9 - TANKER/OILER	12 - TANKER/OILER
10 - FISHING BOAT	29 - FISHING VESSEL
11 - MERCHANT	30 - MERCHANT VESSEL
14 - OTHER	11 - TROOP SHIP
	13 - AUXILIARY SHIP
	16 - HOSPITAL SHIP
	17 - SURFACED SUBMARINE
	18 - HYDROFOIL
	19 - AIR CUSHION VEHICLE
	20 - INTELLIGENCE COLLECTOR
	21 - SURVEY VESSEL

APPENDIX C

TABLE C.5.2-M.11M. M.11M/M.811M Message Data Element Translation from the J6.0 Message (Sheet 10 of 18)

NOTES (Continued)

4. (Continued)

Link 11/11B(SURFACE (OCEANIC) CATEGORY)GENERAL TYPE

15 - RESET TO NO STATEMENT

(SUBSURFACE CATEGORY)

GENERAL TYPE

0 - NO STATEMENT

1 - ATTACK

2 - CRUISE MISSILE LAUNCHER

3 - BALLISTIC MISSILE LAUNCHER

14 - OTHER

Link 16SURFACE (MARITIME) PLATFORM

22 - NON-MILITARY

25 - COMMAND

26 - OCEAN RESEARCH

31 - PATROL CRAFT ESCORT

33 - MISSILE CONTROL UNIT

63 - RESET TO NO STATEMENT

SUBSURFACE (MARITIME) PLATFORM

0 - NO STATEMENT

28 - ATTACK SUBMARINE

29 - CRUISE MISSILE LAUNCHER

5 - DIESEL ELECTRIC BALLISTIC
MISSILE SUBMARINE12 - NUCLEAR BALLISTIC MISSILE
SUBMARINE

1 - SUBMARINE PROPULSION UNKNOWN

2 - DIESEL ELECTRIC SUBMARINE
GENERAL3 - DIESEL ELECTRIC ATTACK
SUBMARINE4 - DIESEL ELECTRIC MISSILE
SUBMARINE

6 - TYPE 1 DIESEL

7 - TYPE 2 DIESEL

8 - TYPE 3 DIESEL

9 - NUCLEAR SUBMARINE GENERAL

10 - NUCLEAR ATTACK SUBMARINE

11 - NUCLEAR MISSILE SUBMARINE

13 - TYPE I NUCLEAR

14 - TYPE II NUCLEAR

15 - TYPE III NUCLEAR

16 - TYPE IV NUCLEAR

17 - TYPE V NUCLEAR

18 - NON-SUBMARINE

19 - SURFACE VESSEL

20 - TORPEDO

21 - MINE

22 - DECOY

23 - WRECK

24 - SEABED PIPELINE

25 - FISH/MARINE LIFE

26 - SWIMMER/FROGMAN

27 - KNUCKLE/WAKE

APPENDIX C

TABLE C.5.2-M.11M. M.11M/M.811M Message Data Element Translation from the J6.0 Message (Sheet 11 of 18)

NOTES (Continued)

4. (Continued)

Link 11/11B (SUBSURFACE CATEGORY) GENERAL TYPE		Link 16 SUBSURFACE (MARITIME) PLATFORM
		30 - PINNACLE/SEAMOUNTAIN
		31 - NON-MILITARY SUBMERSIBLE
		32 - UNDEFINED
		33 - TYPE VI NUCLEAR
		34 - TYPE VII NUCLEAR
		35 - CONVENTIONAL (COMMAND AND CONTROL)
		36 - CONVENTIONAL (AUXILIARY)
		37 - NUCLEAR (COMMAND AND CONTROL)
		49 - MISSILE CONTROL UNIT
15 - RESET TO NO STATEMENT		63 - RESET TO NO STATEMENT
(LAND CATEGORY)		
GENERAL TYPE	LAND (GROUND) PLATFORM	LAND (GROUND) SPECIFIC TYPE
0 - NO STATEMENT	0 - NO STATEMENT	ALL
1 - SAM SITE	40 - SURFACE-TO-AIR MISSILE (SAM) SITE	ALL
	49 - THEATER HIGH ALTITUDE AREA DEFENSE (THAAD)	ALL
	57 - BALLISTIC MISSILE DEFENSE SITE	ALL
2 - AAA SITE	22 - AIR DEFENSE ARTILLERY	ALL
	56 - AIR DEFENSE SITE	ALL
3 - GCI SITE	ALL	96 - GCI SITE
4 - EA SITE	ALL	93 - EA SITE
5 - AIR BASE	7 - AIRFIELD/AIRBASE	ALL
6 - TRAP	ALL	91 - TRAP
7 - DUMMY	ALL	90 - DUMMY
8 - COMMAND CENTER	3 - COMMAND/CONTROL/CENTRAL COMMAND AND CONTROL CENTER	ALL
	50 - JOINT TACTICAL GROUND STATION (JTACS)	ALL
9 - SSM SITE	ALL	139 - SSM
10 - POINT TARGET	ALL	92 - POINT TARGET
11 - FIELD ARTILLERY SITE	21 - FIELD ARTILLERY	ALL
12 - TROOP CONCENTRATION	1 - TROOP CONCENTRATION/UNIT	ALL
13 - CONVOY/VEHICLE	4 - ASSEMBLY AREA	ALL

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.11M. M.11M/M.811M Message Data Element Translation from the J6.0 Message (Sheet 12 of 18)

NOTES (Continued)

4. (Continued)

<u>Link 11/11B</u>		<u>Link 16</u>
<u>(LAND CATEGORY)</u>		
<u>GENERAL TYPE</u>	<u>LAND (GROUND) PLATFORM</u>	<u>LAND (GROUND) SPECIFIC TYPE</u>
	13 - CONVOY	ALL
	14 - COMBAT VEHICLE	ALL
	15 - COMBAT SUPPORT VEHICLE	ALL
	16 - VEHICLE, OTHER	ALL
	17 - TANK	ALL
	18 - TRAIN	ALL
	19 - REMOTELY PILOTED VEHICLE	ALL
	48 - TRACKED VEHICLE	ALL
	51 - ARMOR	ALL
14 - OTHER	5 - INSTALLATION/FACILITY, MILITARY	ALL
	6 - INSTALLATION/FACILITY, CIVILIAN	ALL
	8 - PORT/HARBOR FACILITY	ALL
	9 - STORAGE SITE	ALL
	10 - TACTICAL POSITION	ALL
	11 - FORTIFICATION	ALL
	12 - INTERSECTION	ALL
	20 - MORTAR	ALL
	23 - ROCKET LAUNCHER	ALL
	24 - MISSILE LAUNCHER	ALL
	25 - SPECIAL WEAPON	ALL
	26 - BRIDGE	ALL
	27 - BUILDING/STRUCTURE	ALL
	28 - POWER FACILITY	ALL
	29 - RAIL FACILITY	ALL
14 - OTHER	30 - TERRAIN	ALL
	31 - NAVAID SITE	ALL
	32 - COMMUNICATION SITE	ALL
	33 - RADAR SITE	ALL
	34 - ANTENNA/EMITTER	ALL
	35 - BUFFER CENTER	ALL
	36 - ELECTRONIC WARFARE SITE	ALL
	37 - SURVEILLANCE SITE	ALL
	38 - BRIDGING EQUIPMENT	ALL

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.11M. M.11M/M.811M Message Data Element Translation from the J6.0 Message (Sheet 13 of 18)

NOTES (Continued)

4. (Continued)

<u>Link 11/11B</u>		<u>Link 16</u>
<u>(LAND CATEGORY)</u>		
<u>GENERAL TYPE</u>	<u>LAND (GROUND) PLATFORM</u>	<u>LAND (GROUND) SPECIFIC TYPE</u>
	39 - MINE WARFARE EQUIPMENT	ALL
15 - RESET TO NO STATEMENT	63 - RESET TO NO STATEMENT	ALL
<u>(MISSILE CATEGORY)</u>		<u>AIR PLATFORM</u>
<u>GENERAL TYPE</u>		
1 - ANTIAIR		37 - SURFACE-TO-AIR MISSILE (SAM)
		41 - AIR-TO-AIR MISSILE (AAM)
2 - ANTISURF		38 - AIR-TO-SURFACE MISSILE (ASM)
		39 - SURFACE-TO-SURFACE MISSILE (SSM)
		42 - SUBSURFACE-TO-SURFACE MISSILE
3 - ANTISUB		43 - SURFACE-TO-SUBSURFACE MISSILE
14 - OTHER		13 - MISSILE
		44 - CRUISE MISSILE
		45 - BALLISTIC MISSILE

5. The M.811M Mission field is derived from the J6.0I Platform Activity fields as follows:

<u>Link 11/11B</u>	<u>Link 16</u>
<u>(AIR CATEGORY)</u>	
<u>MISSION</u>	<u>AIR PLATFORM ACTIVITY</u>
0 - NO STATEMENT	0 - NO STATEMENT
	2 - OVER THE HORIZON TARGETING (OTHT)
	3 - TRAINING
	9 - ESCORTING
	11 - TRANSITING
	13 - INTRUDING
	15 - COMMUNICATIONS RELAY
	19 - SHADOWING/INTERVENING
	20 - TOWING
	22 - INTERCEPTION
	24 - POLICING
	25 - CONVENTIONAL ATTACK
	32 - FORWARD AIR CONTROLLER (FAC)
	33 - VERY IMPORTANT PERSON (VIP) FLIGHT
	34 - NONCOMBATANT OPERATIONS

APPENDIX C

TABLE C.5.2-M.11M. M.11M/M.811M Message Data Element Translation from the J6.0 Message (Sheet 14 of 18)

NOTES (Continued)

5. (Continued)

Link 11/11B (AIR CATEGORY) MISSION	Link 16 AIR PLATFORM ACTIVITY
1 - CAP (COUNTER AIR)	37 - GROUND ATTACK TACTICS (GAT)
2 - CAS	45 - HIJACK
3 - INTERDICTION	48 - XRAY
4 - RECCE	49 - ANTIAIR WARFARE (AAW)
	51 - COUNTER-AIR WARFARE
	52 - RETURN TO BASE (RTB)
	31 - COMBAT AIR PATROL (CAP)
	35 - CLOSE AIR SUPPORT (CAS)
	30 - INTERDICTION
	1 - RECONNAISSANCE
	7 - SURVEILLANCE
	42 - SPOTTING
5 - AIRLIFT (LOGISTICS)	4 - LOGISTICS SUPPORT
	17 - AIRLIFT (TRANSPORT)
	47 - TROOPLIFT
6 - PATROL (OCEAN SURVEILLANCE)	16 - PATROL (OCEAN SURVEILLANCE)
7 - AIRBORNE COMMAND POST (ACP)	38 - AIRBORNE COMMAND POST (ACP)
	50 - COMMAND AND CONTROL
8 - AEW	36 - AIRBORNE EARLY WARNING (AEW)
9 - EA	23 - ELECTRONIC ATTACK (EA)
10 - ES	6 - ELECTRONIC WARFARE (EW)
	14 - ELECTRONIC WARFARE SUPPORT (ES)
	46 - JAMMER
11 - REFUEL	29 - REFUELING/TANKING
	41 - TANKING
13 - AIR ASSAULT	21 - AIR ASSAULT
14 - ASW	18 - ANTISUBMARINE WARFARE (ASW)
15 - SAR	8 - SEARCH AND RESCUE (SAR)
	28 - SEARCH
	39 - RESCUE COMBAT AIR PATROL (RESCAP)
	57 - RESCUE HELO
16 - MEDEVAC	26 - MEDICAL EVACUATION (MEDEVAC)
17 - MINE LAYING	10 - MINELAYING
18 - MINE SWEEPING	27 - MINE COUNTERMEASURES
19 - ANTISHIP	5 - ANTISURFACE WARFARE
	40 - SURFACE COMBAT AIR PATROL (SUCAP)
20 - SPECIAL	12 - SPECIAL WEAPONS ATTACK
	44 - SPECIAL
51-62 - AM-1 THROUGH AM-12	115-126 - AIR ACTIVITY 1 THROUGH 12
63 - RESET TO NO STATEMENT	127 - RESET TO NO STATEMENT

APPENDIX C

TABLE C.5.2-M.11M. M.11M/M.811M Message Data Element Translation from the J6.0 Message (Sheet 15 of 18)

NOTES (Continued)

5. (Continued)

Link 11/11B (SURFACE (OCEANIC) CATEGORY)	Link 16 SURFACE (MARITIME) PLATFORM ACTIVITY
MISSION	
0 - NO STATEMENT	0 - NO STATEMENT
	2 - OVER THE HORIZON TARGETING (OHT)
	3 - TRAINING
	4 - LOGISTICS SUPPORT
	7 - FISHERY PROTECTION
	8 - SEARCH AND RESCUE (SAR)
	9 - ESCORTING
	11 - TRANSITING
	12 - NAVAL GUNFIRE SUPPORT
	13 - INTRUDING
	15 - INTELLIGENCE COLLECTING
	16 - PATROL
	17 - TRANSPORT
	19 - SHADOWING/INTERVENING
	20 - TOWING
	24 - FISHING
	25 - PICKETING
	28 - MARKING
	30 - UNDERWAY REPLENISHMENT
	31 - SURVEYING
	38-49 - UNDEFINED
	51-114 - UNDEFINED
	34 - FLIGHT OPERATIONS
	35 - VIDEO DATA LINKING (TARGETING)
	36 - PLANE GUARD
	37 - RESCUE SHIP/LIFEGUARD
	23 - ANTIAIR WARFARE
1 - ANTIAIR WARFARE	1 - AIR WARFARE SUPPORT
2 - AIR WARFARE SUPPORT	5 - ANTISURFACE WARFARE
3 - ANTISURFACE WARFARE	18 - ANTISUBMARINE WARFARE (ASW)
4 - ANTISUBMARINE WARFARE	22 - STRIKE WARFARE
5 - STRIKE WARFARE	14 - AMPHIBIOUS WARFARE
6 - AMPHIBIOUS WARFARE	10 - MINELAYING
7 - MINE WARFARE	26 - MINE COUNTERMEASURES
	27 - MINE WARFARE
8 - ELECTRONIC WARFARE	6 - ELECTRONIC WARFARE (EW)
	32 - ELECTRONIC WARFARE SUPPORT (ES)
	33 - ELECTRONIC ATTACK (EA)
9 - NONCOMBATANT OPERATIONS	29 - NONCOMBATANT OPERATIONS
10 - SPECIAL WARFARE	21 - SPECIAL WARFARE

APPENDIX C

TABLE C.5.2-M.11M. M.11M/M.811M Message Data Element Translation from the J6.0 Message (Sheet 16 of 18)

NOTES (Continued)

5. (Continued)

Link 11/11B (SURFACE (OCEANIC) CATEGORY)	Link 16
MISSION	SURFACE (MARITIME) PLATFORM ACTIVITY
51-62 - SM-1 THROUGH SM-12	115-126 - SURFACE (MARITIME) ACTIVITY 1 THROUGH 12
63 - RESET TO NO STATEMENT	127 - RESET TO NO STATEMENT
(SUBSURFACE CATEGORY)	
MISSION	SUBSURFACE (MARITIME) PLATFORM ACTIVITY
0 - NO STATEMENT	0 - NO STATEMENT
	1 - RECONNAISSANCE
	2 - OVER THE HORIZON TARGETING (OHT)
	3 - TRAINING
	4 - DIVING
	7 - SURVEILLANCE
	8 - SEARCH AND RESCUE (SAR)
	9 - ESCORTING
	11 - TRANSITING
	12 - SPECIAL WEAPONS ATTACK
	13 - SURFACING
	15 - INTELLIGENCE COLLECTING
	16 - PATROL
	17 - TRANSPORT
	19 - SHADOWING/INTERVENING
	20 - BOTTOMING
	23 - CLANDESTINE OPERATIONS
	24 - SNORKELING
	25 - CONVENTIONAL ATTACK
	28 - MARKING
1 - STRIKE WARFARE	22 - STRIKE WARFARE
2 - ANTISUBMARINE WARFARE	18 - ANTISUBMARINE WARFARE (ASW)
3 - ANTISURFACE WARFARE	5 - ANTISURFACE WARFARE
4 - AMPHIBIOUS WARFARE	14 - AMPHIBIOUS WARFARE
5 - MINE WARFARE	10 - MINELAYING
	26 - MINE COUNTERMEASURES
	27 - MINE WARFARE
6 - SPECIAL WARFARE	21 - SPECIAL WARFARE
7 - ELECTRONIC WARFARE	6 - ELECTRONIC WARFARE (EW)
8 - NONCOMBATANT OPERATIONS	29 - NONCOMBATANT OPERATIONS
51-62 - UM-1 THROUGH UM-12	115-126 - SUBSURFACE (MARITIME) ACTIVITY 1 THROUGH 12
63 - RESET TO NO STATEMENT	127 - RESET TO NO STATEMENT

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.11M. M.11M/M.811M Message Data Element Translation from the J6.0 Message (Sheet 17 of 18)

NOTES (Continued)

5. (Continued)

<u>Link 11/11B</u>		<u>Link 16</u>
<u>(LAND CATEGORY)</u>		
<u>MISSION</u>		<u>LAND (GROUND) PLATFORM ACTIVITY</u>
0 - NO STATEMENT		0-52, 55-126
63 - RESET TO NO STATEMENT		127 - RESET TO NO STATEMENT
 (MISSILE CATEGORY)		
<u>MISSION</u>	<u>AIR PLATFORM</u>	<u>AIR PLATFORM ACTIVITY</u>
0 - NO STATEMENT	13, 37-39, 41-45	0-4, 6-17, 19-33, 35-42, 44-52, 57-126
1 - ANTIAIR WARFARE	13, 37, 41, 44, 45	51 - COUNTER-AIR WARFARE
2 - ANTISURFACE WARFARE	13, 38, 39, 42, 44, 45	5 - ANTISURFACE WARFARE
3 - ANTISUBSURFACE WARFARE	13, 43-45	18 - ANTISUBMARINE WARFARE (ASW)
4 - STRIKE WARFARE	13, 37-39, 41-45	43 - STRIKE WARFARE
5 - NONCOMBATANT OPERATIONS	13, 37-39, 41-45	34 - NONCOMBATANT OPERATIONS
63 - RESET TO NO STATEMENT	13, 37-39, 41-45	127 - RESET TO NO STATEMENT

6. Current Activity is derived from the Activity Amplification Index as follows:

<u>Link 11/11B</u>	<u>Link 16</u>
<u>(AIR CATEGORY)</u>	
<u>CURRENT ACTIVITY</u>	<u>ACTIVITY AMPLIFICATION INDEX</u>
0 - NO STATEMENT	0 - NO STATEMENT
	28 - SHADOW
	29 - INTERVENE
1-27	1-27
51-63	51-63

Current Activity and Activity Amplification Index fields within the Surface, Subsurface, and Land Categories are equivalent with no conversion necessary.

APPENDIX C

TABLE C.5.2-M.11M. M.11M/M.811M Message Data Element Translation from the J6.0 Message (Sheet 18 of 18)

NOTES (Continued)

6. (Continued)

<u>Link 11/11B</u> <u>(MISSILE CATEGORY)</u>	<u>Link 16</u>	
<u>CURRENT ACTIVITY</u>	<u>AIR PLATFORM</u>	<u>ACTIVITY AMPLIFICATION INDEX</u>
0 - NO STATEMENT	13, 37-39, 41-45	0-1, 3-29, 51-62
2 - ASSIGNED TO DESTROY		2 - ASSIGNED TO DESTROY
63 - RESET TO NO STATEMENT		63 - RESET TO NO STATEMENT

7. The Switch field in the M.811M message is determined by the presence of nonzero data in either the Local Discrete Identifier or Track Number, Controlling Agency of TN Reference fields. If both of these fields contain nonzero data, then two M.811M messages must be sent. If only the Local Discrete Identifier field is present, then the Switch field shall be set to 1. If only the Track Number, Controlling Agency of TN Reference is present, then the Switch shall be set to 0.

TABLE C.5.2-M.14-1. M.14 Message Data Element Translation from the J10.2 Message (Sheet 1 of 3)

Link 11/11B					Link 16		
<u>MESSAGE</u> M.14	<u>FIELD</u> LABEL	<u>TRANSLATION</u>			<u>DATA ELEMENT</u> LABEL, J-SERIES SUBLABEL, J-SERIES	<u>VALUE</u> 10 2	<u>NOTES</u> 1
		<u>VALUE</u> 14	<u>REQUIRED</u> CR	<u>WORD</u> J10.2I			
	WEAPON/ENGAGEMENT STATUS	AT	CR	J10.2I/ J10.2C1 J10.2I	WEAPON ENGAGEMENT STATUS WEAPON SYSTEM	RX RX	2
	WEAPON TYPE	AT	CR	J10.2I	WEAPON SYSTEM	RX	3
	WEAPON RANGE	0	None	NA	NA	NA	
	NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE	0	None	NA	NA	NA	
	WARHEAD	0	None	NA	NA	NA	
	PU/RU SOURCE	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	G2, G12
	TN FRIENDLY WEAPON SYSTEM	AT	CR	J10.2I	TRACK NUMBER, REFERENCE	RX	G13
	TN TARGET	AT	CR	J10.2I/ J10.2C1	TRACK NUMBER, TARGET	RX	G13

C-855

APPENDIX C

TABLE C.5.2-M.14-1. M.14 Message Data Element Translation from the J10.2 Message (Sheet 2 of 3)

NOTES

1. The M.14 message may be derived from the J10.2, J13.2, J13.3, J13.4, or J13.5 message.

2. The M.14 Weapon/Engagement Status (W/ES) is determined from the J10.2 Weapon Engagement Status and Weapon System fields as follows:

<u>Link 11/11B</u>	<u>Link 16</u>	
<u>WEAPON/ENGAGEMENT</u>	<u>WEAPON ENGAGEMENT</u>	
<u>STATUS</u>	<u>STATUS</u>	<u>WEAPON SYSTEM</u>
2 - ASSIGNED, WEAPON ASSIGNED, INVESTIGATING	2 - WEAPON ASSIGNED	ANY
	3 - TRACKING/LOCKED ON/READY TO FIRE/ BIRD AFFIRM	3, 5, 9, 17
	4 - FIRING/MISSILE IN FLIGHT/ENGAGING TO DESTROY	0, 10-16
	11 - INVESTIGATING/ INTERROGATING	ANY
	12 - SHADOWING	ANY
	13 - INTERVENING	ANY
	14 - COVERING	ANY
3 - TRACKING OR TRACKING/LOCKED ON/ READY TO FIRE	3 - TRACKING/LOCKED ON/READY TO FIRE/ BIRD AFFIRM	ALL EXCEPT 3, 5, 9, 17
4 - FIRING OR ENGAGING	4 - FIRING/MISSILE IN FLIGHT/ENGAGING TO DESTROY	ALL EXCEPT 0, 10-16
5 - EFFECTIVE	5 - EFFECTIVE/TARGET DESTROYED/GRAND SLAM	ANY
6 - PARTIALLY EFFECTIVE	6 - PARTIALLY EFFECTIVE	ANY
7 - NOT EFFECTIVE	7 - NOT EFFECTIVE	0, 10-16
8 - ENGAGEMENT BROKEN	7 - NOT EFFECTIVE	ALL EXCEPT 0, 10-16
9 - HEADS UP	8 - ENGAGEMENT BROKEN	ANY
10 - ENGAGEMENT INTERRUPTED	9 - HEADS UP	0
	10 - ENGAGEMENT INTERRUPTED	ANY

All other J10.2 Weapon Engagement Status and Weapon System combinations shall be discarded without sending the M.14 message.

APPENDIX C

TABLE C.5.2-M.14-1. M.14 Message Data Element Translation from the J10.2
Message (Sheet 3 of 3)

NOTES (Continued)

3. Weapon Type is determined from J10.2 Weapon System as follows:

Link 11/11B	Link 16
WEAPON TYPE	WEAPON SYSTEM
0 - NO STATEMENT	0 - NO STATEMENT
	10 - LASER
	11 - BEAM WEAPON
	12 - INFRARED DECOY
	13 - CHAFF
	14 - SPOT JAMMER
	15 - BARRAGE JAMMER
	16 - DECEPTION JAMMER
1 - SURFACE-TO-AIR MISSILE (SAM)	1 - SURFACE-TO-AIR MISSILE (SAM)
2 - SURFACE-TO-SURFACE MISSILE (SSM)	2 - SURFACE-TO-SURFACE MISSILE (SSM)
3 - INTERCEPTOR	3 - AIRCRAFT
	17 - INTERCEPTOR
4 - CONVENTIONAL (SHORT RANGE MISSILE/GUNS)	4 - CONVENTIONAL (SHORT RANGE MISSILE OR GUNS)
5 - ASW HELO	5 - ANTISUBMARINE WARFARE HELICOPTER
	6 - ANTISUBMARINE WARFARE MISSILE
6 - ASW MISSILE	7 - DEPTH CHARGE/DEPTH BOMB
7 - DEPTH CHARGE/DEPTH BOMB	8 - TORPEDO
8 - TORPEDO	9 - FIXED WING ANTISUBMARINE WARFARE AIRCRAFT
9 - FIXED WING ASW AIRCRAFT	18 - AIR-TO-SURFACE MISSILE (ASM)
10 - AIR-TO-SURFACE MISSILE (ASM)	

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-M.14-2. M.14 Message Data Element Translation from the J13.2 Message (Sheet 1 of 2)

Link 11/11B					Link 16		
MESSAGE	FIELD	VALUE	TRANSLATION		DATA ELEMENT	VALUE	NOTES
M.14	LABEL	14	REQUIRED	WORD	LABEL, J-SERIES	13	1
			CR	J13.2I	SUBLABEL, J-SERIES	2	
	WEAPON/ENGAGEMENT STATUS	AT	CR	J13.2I	OPERATIONAL CAPABILITY, AIRCRAFT	RX	2
	WEAPON TYPE	3	None	NA	NA	NA	
	WEAPON RANGE	0	None	NA	NA	NA	
	NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE	0	None	NA	NA	NA	
	WARHEAD	0	None	NA	NA	NA	
	PU/RU SOURCE	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	G2, G12
	TN FRIENDLY WEAPON SYSTEM	AT	CR	J13.2I	TRACK NUMBER, REFERENCE	RX	G13
	HOT INVENTORY	0	None	NA	NA	NA	
	COLD INVENTORY	0	None	NA	NA	NA	
	TN TARGET	0	None	NA	NA	NA	

APPENDIX C

TABLE C.5.2-M.14-2. M.14 Message Data Element Translation from the J13.2 Message (Sheet 2 of 2)

NOTES

1. The M.14 message may be derived from the J10.2, J13.2, J13.3, J13.4, or J13.5 messages.
2. The Weapon/Engagement Status shall be determined from the J13.2 Operational Capability, Aircraft as follows:

Link 11/11BWEAPON/ENGAGEMENT STATUS

0

1

Link 16OPERATIONAL CAPABILITY, AIRCRAFT

1

2

3

TABLE C.5.2-M.14-3. M.14 Message Data Element Translation from the J13.3 Message (Sheet 1 of 7)

Link 11/11B					Link 16		
MESSAGE	FIELD	VALUE	TRANSLATION	WORD	DATA ELEMENT	VALUE	NOTES
M.14	LABEL	14	REQUIRED	J13.3I	LABEL, J-SERIES	13	1
			CR		SUBLABEL, J-SERIES	3	
	WEAPON/ENGAGEMENT STATUS	AT	CR	J13.3C1	OPERATIONAL MISSILE INVENTORY, 1	RX	2
					OPERATIONAL MISSILE INVENTORY, 2	RX	2
					OPERATIONAL MISSILE INVENTORY, 3	RX	2
				J13.3C5	OPERATIONAL MISSILE INVENTORY, 4	RX	
					OPERATIONAL MISSILE INVENTORY, 5	RX	
					OPERATIONAL MISSILE INVENTORY, 6	RX	
				J13.3C6	OPERATIONAL MISSILE INVENTORY, 7	RX	
					OPERATIONAL MISSILE INVENTORY, 8	RX	
					OPERATIONAL MISSILE INVENTORY, 9	RX	
				J13.3C7	OPERATIONAL MISSILE INVENTORY, 10	RX	
					OPERATIONAL MISSILE INVENTORY, 11	RX	
					OPERATIONAL MISSILE INVENTORY, 12	RX	
				J13.3C1	NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 1	RX	
					NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 2	RX	
					NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 3	RX	
				J13.3C5	NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 4	RX	
					NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 5	RX	
					NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 6	RX	

TABLE C.5.2-M.14-3. M.14 Message Data Element Translation from the J13.3 Message (Sheet 2 of 7)

Link 11/11B		TRANSLATION			Link 16		
MESSAGE	FIELD	VALUE	REQUIRED	WORD	DATA ELEMENT	VALUE	NOTES
M.14 (Cont'd)				J13.3C6	NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 7	RX	
				J13.3C7	NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 8	RX	
					NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 9	RX	
					NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 10	RX	
					NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 11	RX	
					NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 12	RX	
	WEAPON TYPE	AT	CR	J13.3C1	MISSILE TYPE, 1	RX	3
				J13.3C5	MISSILE TYPE, 2	RX	3
					MISSILE TYPE, 3	RX	3
					MISSILE TYPE, 4	RX	
					MISSILE TYPE, 5	RX	
					MISSILE TYPE, 6	RX	
					MISSILE TYPE, 7	RX	
					MISSILE TYPE, 8	RX	
					MISSILE TYPE, 9	RX	
					MISSILE TYPE, 10	RX	
					MISSILE TYPE, 11	RX	
					MISSILE TYPE, 12	RX	
	WEAPON RANGE	AT	CR	J13.3C1	MISSILE TYPE, 1	RX	3
				J13.3C5	MISSILE TYPE, 2	RX	3
					MISSILE TYPE, 3	RX	3
					MISSILE TYPE, 4	RX	
					MISSILE TYPE, 5	RX	
					MISSILE TYPE, 6	RX	
					MISSILE TYPE, 7	RX	
					MISSILE TYPE, 8	RX	
					MISSILE TYPE, 9	RX	
					MISSILE TYPE, 10	RX	
					MISSILE TYPE, 11	RX	
					MISSILE TYPE, 12	RX	

C-862

TABLE C.5.2-M.14-3. M.14 Message Data Element Translation from the J13.3 Message (Sheet 3 of 7)

Link 11/11B					Link 16		
MESSAGE	FIELD	VALUE	TRANSLATION REQUIRED	WORD	DATA ELEMENT	VALUE	NOTES
M.14 (Cont'd)	NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE	AT	CR	J13.3C1	NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 1	RX	4
					NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 2	RX	4
					NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 3	RX	4
				J13.3C5	NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 4	RX	
					NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 5	RX	
					NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 6	RX	
				J13.3C6	NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 7	RX	
					NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 8	RX	
					NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 9	RX	
				J13.3C7	NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 10	RX	
					NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 11	RX	
					NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE, 12	RX	
	WARHEAD	0	None	NA	NA	NA	
	PU/RU SOURCE	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	G2, G12
	TN FRIENDLY WEAPON SYSTEM	AT	CR	J13.3I	TRACK NUMBER, REFERENCE	RX	G13
	HOT INVENTORY	AT	CR	J13.3C1	OPERATIONAL MISSILE INVENTORY, 1	RX	5
					OPERATIONAL MISSILE INVENTORY, 2	RX	5
					OPERATIONAL MISSILE INVENTORY, 3	RX	5

C-863

TABLE C.5.2-M.14-3. M.14 Message Data Element Translation from the J13.3 Message (Sheet 4 of 7)

Link 11/11B					Link 16		
<u>MESSAGE</u>	<u>FIELD</u>	<u>TRANSLATION</u>			<u>DATA ELEMENT</u>	<u>VALUE</u>	<u>NOTES</u>
		<u>VALUE</u>	<u>REQUIRED</u>	<u>WORD</u>			
M.14 (Cont'd)				J13.3C5	OPERATIONAL MISSILE INVENTORY, 4	RX	
					OPERATIONAL MISSILE INVENTORY, 5	RX	
					OPERATIONAL MISSILE INVENTORY, 6	RX	
				J13.3C6	OPERATIONAL MISSILE INVENTORY, 7	RX	
					OPERATIONAL MISSILE INVENTORY, 8	RX	
					OPERATIONAL MISSILE INVENTORY, 9	RX	
				J13.3C7	OPERATIONAL MISSILE INVENTORY, 10	RX	
					OPERATIONAL MISSILE INVENTORY, 11	RX	
					OPERATIONAL MISSILE INVENTORY, 12	RX	
	COLD INVENTORY	0	None	NA	NA	NA	
	TN TARGET	0	None	NA	NA	NA	

C-864

APPENDIX C

TABLE C.5.2-M.14-3. M.14 Message Data Element Translation from the J13.3 Message (Sheet 5 of 7)

NOTES

1. The M.14 message may be derived from the J10.2, J13.2, J13.3, J13.4, or J13.5 messages.
2. The M.14 messages forwarding J13 series status information will have the Weapon/Engagement Status (W/ES) set to value 1 if either an Operational Missile Inventory or Number of Fire Control Systems Available is 0 in the J13.3 message. In all other cases, the W/ES will be set to 0.
3. The M.14 Weapon Type and Weapon Range fields provide the capability to show the simple presence or absence of a particular group of surface-to-air or surface-to-surface missiles. As many as twelve separate weapons may be reported in the J13.3. There are no restrictions as to which weapon will be shown in which of the twelve available fields. It would be possible that Missile Type, 2 would show a weapon while all other Missile Types were No Statement. The J13.3 Missile Type, 1 through 12 will be forwarded in the M.14 Weapon Type and Weapon Range fields as follows:

<u>Link 11/11B</u>		<u>Link 16</u>
<u>Weapon Type</u>	<u>Weapon Range</u>	<u>Missile Type, 1 - 12</u>
0	0	0, 7, 28-63
1	1	1
	2	2, 10, 11
	3	3, 8, 9, 12-14, 18-23, 27
2	1	4
	2	5, 26
	3	6, 15-17, 24, 25

In addition, if Missile Type = 8, 9, 12-27, then also transmit another M.14 with:

11	1	9, 12, 18-21
	2	13, 22

APPENDIX C

TABLE C.5.2-M.14-3. M.14 Message Data Element Translation from the J13.3 Message (Sheet 6 of 7)

NOTES (Continued)

3. (Continued)

	3	8, 14, 23, 27
12	1	15, 26
	2	16, 24
	3	17, 25

4. As many as twelve separate Number of Fire Control Systems Available corresponding to Missile Type, 1-12 may be reported in the J13.3. There are no restrictions as to which Number of Fire Control Systems Available field will be shown in which of the twelve available fields. It would be possible that Number of Fire Control Systems Available, 2 corresponding with Missile Type, 2 would show a valid Number of Fire Control Systems Available while all other Number of Fire Control Systems Available were No Statement. The M.14 Number of Fire Control Systems Available field is determined as follows:

<u>Link 11/11B</u>	<u>Link 16</u>
<u>Number of Fire Control Systems Available</u>	<u>Number of Fire Control Systems Available, 1 - 12</u>
0	0
	15
1	1
2	2
3	3-14

5. As many as twelve separate inventories may be reported in J13.3. There are no restrictions as to which inventory will be shown in which of the twelve available fields. It would be possible that Operational Missile Inventory, 2 would show an inventory while all other Operational Missile Inventory were No Statement. The M.14 Hot Inventory field is determined from the J13.3 Operational Missile Inventory, 1-12 fields as follows:

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.14-3. M.14 Message Data Element Translation from the J13.3
Message (Sheet 7 of 7)

NOTES (Continued)

5. (Continued)

Link 11/11B

HOT INVENTORY

0

1-125

126

Link 16

OPERATIONAL MISSILE INVENTORY, 1 - 12

0

127

1-125

126

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-M.14-4. M.14 Message Data Element Translation from the J13.4 Message (Sheet 1 of 3)

<u>MESSAGE</u> M.14	Link 11/11B		TRANSLATION		Link 16		<u>NOTES</u> 1
	<u>FIELD</u> LABEL	<u>VALUE</u> 14	<u>REQUIRED</u> CR	<u>WORD</u> J13.4I	<u>DATA ELEMENT</u> LABEL, J-SERIES SUBLABEL, J-SERIES	<u>VALUE</u> 13 4	
	WEAPON/ENGAGEMENT STATUS	AT	CR	J13.4C1	OPERATIONAL MISSILE INVENTORY, 1	RX	2
					OPERATIONAL MISSILE INVENTORY, 2	RX	2
					OPERATIONAL MISSILE INVENTORY, 3	RX	2
	WEAPON TYPE	AT	CR	J13.4C1	MISSILE TYPE, 1	RX	3
					MISSILE TYPE, 2	RX	3
					MISSILE TYPE, 3	RX	3
	WEAPON RANGE	AT	CR	J13.4C1	MISSILE TYPE, 1	RX	3
					MISSILE TYPE, 2	RX	3
					MISSILE TYPE, 3	RX	3
	NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE	0	None	NA	NA	NA	
	WARHEAD	0	None	NA	NA	NA	
	PU/RU SOURCE	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	G2, G12
	TN FRIENDLY WEAPON SYSTEM	AT	CR	J13.4I	TRACK NUMBER, REFERENCE	RX	G13
	HOT INVENTORY	AT	CR	J13.4C1	OPERATIONAL MISSILE INVENTORY, 1	RX	4
					OPERATIONAL MISSILE INVENTORY, 2	RX	4
					OPERATIONAL MISSILE INVENTORY, 3	RX	4
	COLD INVENTORY	0	None	NA	NA	NA	
	TN TARGET	0	None	NA	NA	NA	

C-869

APPENDIX C

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.14-4. M.14 Message Data Element Translation from the J13.4 Message (Sheet 2 of 3)

NOTES

1. The M.14 message may be derived from the J10.2, J13.2, J13.3, J13.4, or J13.5 messages.
2. The M.14 messages forwarding J13 series status information will have the Weapon/Engagement Status (W/ES) set to value 1 if an Operational Missile Inventory is set to value 0 in the J13.4 message. In all other cases, the W/ES will be set to value 0.
3. The M.14 Weapon Type and Weapon Range fields provide the capability to show the simple presence or absence of a particular group of surface-to-air or surface-to-surface missiles. As many as three separate weapons may be reported in the J13.4. There are no restrictions as to which weapon will be shown in which of the three available fields. It would be possible that Missile Type, 2 would show a weapon while Missile Type, 1 and 3 were No Statement. The J13.4 Missile Type, 1, 2, or 3 will be forwarded in the M.14 Weapon Type and Weapon Range fields as follows:

<u>Link 11/11B</u>		<u>Link 16</u>
<u>Weapon Type</u>	<u>Weapon Range</u>	<u>Missile Type, 1, 2 or 3</u>
0	0	0, 57-63
1	1	1
	2	2
		9
		10
		11
	3	3
		8
		12-14
2	1	4
	2	5
		26
	3	6

APPENDIX C

TABLE C.5.2-M.14-4. M.14 Message Data Element Translation from the J13.4 Message (Sheet 3 of 3)

NOTES (Continued)

3. (Continued)

15-17

24

25

In addition, if Missile Type = 8-9, 12-17 or 24-26 then also transmit another M.14 with:

11	1	9, 12
	2	13
	3	8, 14
12	1	15, 26
	2	16, 24
	3	17, 25

4. As many as three separate inventories may be reported in J13.4. There are no restrictions as to which inventory will be shown in which of the three available fields. It would be possible that Operational Missile Inventory, 2 would show an inventory while Operational Missile Inventory, 1 and 3 were No Statement. The M.14 Hot Inventory field is determined from the J13.4 Operational Missile Inventory, 1-3 fields as follows:

<u>Link 11/11B</u>	<u>Link 16</u>
<u>Hot Inventory</u>	<u>Operational Missile Inventory, 1, 2 or 3</u>
0	0
	127
1-125	1-125
126	126

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-M.14-5. M.14 Message Data Element Translation from the J13.5 Message (Sheet 1 of 3)

Link 11/11B					Link 16		
<u>MESSAGE</u> M.14	<u>FIELD</u> LABEL	<u>VALUE</u> 14	<u>TRANSLATION</u>		<u>DATA ELEMENT</u> LABEL, J-SERIES SUBLABEL, J-SERIES	<u>VALUE</u> 13 5	<u>NOTES</u> 1
			<u>REQUIRED</u> CR	<u>WORD</u> J13.5I			
	WEAPON/ENGAGEMENT STATUS	AT	CR	J13.5I	PERIMETER ENGAGEMENT STATUS OPERATIONAL CAPABILITY HOT INVENTORY	RX RX RX	2
	WEAPON TYPE	AT	CR	J13.5I	SITE TYPE	RX	3
	WEAPON RANGE	0	None	NA	NA	NA	
	NUMBER OF FIRE CONTROL SYSTEMS AVAILABLE	0	None	NA	NA	NA	
	WARHEAD	0	None	NA	NA	NA	
	PU/RU SOURCE	AT	CR	HEADER	TRACK NUMBER, SOURCE	RX	G2, G12
	TN FRIENDLY WEAPON SYSTEM	AT	CR	J13.5I	TRACK NUMBER, REFERENCE	RX	G13
	HOT INVENTORY	AT	CR	J13.5I	HOT INVENTORY	RX	4
	COLD INVENTORY	AT	CR	J13.5C1	COLD INVENTORY	RX	5
	TN TARGET	0	None	NA	NA	NA	

APPENDIX C

TABLE C.5.2-M.14-5. M.14 Message Data Element Translation from the J13.5 Message (Sheet 2 of 3)

NOTES

1. The M.14 message may be derived from the J10.2, J13.2, J13.3, J13.4, or J13.5 messages.

2. The M.14 Weapon/Engagement Status (W/ES) is translated from the J13.5 Perimeter Engagement Status, Operational Capability and Hot Inventory as follows:

<u>Link 11/11B</u>	<u>Link 16</u>		
<u>WEAPON/</u>	<u>PERIMETER</u>	<u>OPERATIONAL</u>	<u>HOT INVENTORY</u>
<u>ENGAGEMENT</u>	<u>ENGAGEMENT</u>	<u>CAPABILITY</u>	
<u>STATUS</u>	<u>STATUS</u>		
0	0	0	1-126
		1	0-127
		2	
1	0	0	0 or 127
		3	0-127
12	1	1	0-127
		2 or 3	

The Link 16 Operational Capability value No Statement has no directly corresponding value in Link 11/11B.

3. The J13.5 Site Type will be reported in the M.14 Weapon Type as follows:

<u>Link 11/11B</u>	<u>Link 16</u>
<u>WEAPON TYPE</u>	<u>SITE TYPE</u>
0 - NO STATEMENT	0 - NO STATEMENT
	ALL VALUES NOT LISTED BELOW
1 - SURFACE-TO-AIR MISSILE (SAM)	10, 11, 12, 13, 14 OR 28
4 - CONVENTIONAL (SHORT RANGE MISSILE/GUNS)	15 OR 16

4. The J13.5 Hot Inventory will be reported in the M.14 Hot Inventory as follows:

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.14-5. M.14 Message Data Element Translation from the J13.5 Message (Sheet 3 of 3)

NOTES (Continued)

4. (Continued)

Link 11/11B	Link 16
HOT INVENTORY	HOT INVENTORY
0	0 OR 127
1 - 125	1 -125
126	126

5. The J13.5 Cold Inventory will be reported in the M.14 Cold Inventory as follows:

Link 11/11B	Link 16
COLD INVENTORY	COLD INVENTORY
0	0 OR 127
1-30	1-30
31	31-126

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

TABLE C.5.2-M.15. M.15 Message Data Element Translation from the J9.0 Message (Sheet 1 of 2)

Link 11/11B					Link 16		
<u>MESSAGE</u>	<u>FIELD</u>	<u>VALUE</u>	<u>TRANSLATION</u>		<u>DATA ELEMENT</u>	<u>VALUE</u>	<u>NOTES</u>
M.15	LABEL	15	CR	REQUIRED	WORD	9	
					J9.0I	0	
	TN ADDRESSEE	AT	CR		J9.0I	TRACK NUMBER, ADDRESSEE	RX G12
	THREAT WARNING AIR	RX	=		J9.0I	THREAT WARNING CONDITION	RX
	COMMAND	AT	CR		J9.0I	COMMAND	RX 1
	WEAPON TYPE	RX	=		J9.0I	WEAPON TYPE	RX
	RECEIPT/COMPLIANCE	AT	CR		J9.0I	RECEIPT/COMPLIANCE	RX 2
	TN WEAPON SYSTEM/TN-1/ ORIGINATOR	AT	CR		J9.0E0	TRACK NUMBER, FRIENDLY WEAPON	RX 3, G12
					HEADER	COMMAND MISSION	RX
						TRACK NUMBER, SOURCE	RX
	DUTY ASSIGNMENT	RX	=		J9.0E0	DUTY ASSIGNMENT	RX
	DUTY ASSIGNMENT FUNCTIONAL AREA	RX	=		J9.0E0	DUTY ASSIGNMENT FUNCTIONAL AREA	RX
	IMPACT TIME	RX	=		J9.0C2	MINUTE	RX
	NUMBER OF MISSILES	RX	=		J9.0C2	NUMBER OF MISSILES	RX
	TN TARGET/TN-2	AT	CR		J9.0I	TRACK NUMBER, OBJECTIVE	RX G13

C-877

APPENDIX C

MIL-STD-6016B

APPENDIX C

TABLE C.5.2-M.15. M.15 Message Data Element Translation from the J9.0 Message (Sheet 2 of 2)

NOTES

1. If the J9.0 Command value is 20-22, the M.10A will be forwarded. Otherwise, the J9.0 Command value will be reported in the M.15 Command message as follows:

<u>Link 11/11B</u>	<u>Link 16</u>
<u>COMMAND</u>	<u>COMMAND</u>
0-8	0-8
3	23
14-19	14-19
20	27

2. The R/C value in the J9.0 message will be reported on Link 11/11B in the R/C field of the M.15 message as follows:

<u>Link 11/11B</u>	<u>Link 16</u>
<u>RECEIPT/COMPLIANCE</u>	<u>RECEIPT/COMPLIANCE</u>
0 or 1	0 or 1
3 or 4	3 or 4
6	6
7	7-22

3. The Command value of the J9.0 message will determine which J9.0 Data Element will be translated to TN Weapon System/TN-1/Originator.

<u>J9.0 COMMAND</u>	<u>J9.0 DATA ELEMENT</u>
0-8 OR 23 (FOR LINK 11)	TRACK NUMBER, FRIENDLY WEAPON
0-8 OR 23 (FOR LINK 11B)	HEADER, TN SOURCE
16 OR 17	COMMAND MISSION

For the J9.0 message data elements above, the identical values will be used for the M.15 field.

4. Not Used.

APPENDIX C

C.5.3 GENERAL NOTES FOR MESSAGE DATA ELEMENT TRANSLATION

This section provides the general notes used for message data element translations in section C.5.2.

APPENDIX C

GENERAL NOTE 1 HEADER INFORMATION

Header information is required on all Link 16 messages. The Track Number, Source will be that of the unit whose data are being forwarded within the time slot. Only data from the Track Number, Source shall be transmitted within a time slot. An FJU forwarding for multiple sources shall ensure the above separation of data and individual data sources. The Relayed Transmission Indicator shall be set to 0 by the FJU for forwarded messages. Subsequent relay by any platform of these forwarded messages will follow normal procedure for setting of the Relayed Transmission Indicator. Messages which are originated by the FJU such as a Drop Track for a unit which becomes inactive shall be transmitted with the FJU as Track Number, Source.

GENERAL NOTE 2 DATA SOURCE DETERMINATION

LINK 16. The data source of Link 16 messages is contained in the Link 16 message header.

The Source TN field in the Header word that accompanies each J2.0 message will contain the TN associated with the forwarded unit.

LINK 11. The data source of Link 11 messages that do not include data source (M.81, M.2, M.82, M.3, M.83, M.4A, M.84A, M.4B, M.4C, M.84C, M.4D, M.84D, M.5, M.85, M.6A, M.6B, M.86B, M.6C, M.86C, M.6D, M.9A(AC=3), M.9E, M.9F(AC=0), M.89F(AC=0), M.9F(AC=1), M.10A(Order=0-5), M.11B, M.11C, M.11D, M.811M, and M.15) is determined by the data source of the last received M.1 message.

The data source of Link 11 messages that include data source (M.1, M.9A(AC=1, 2, 4, 5, 6, 7, 9), M.9B, M.9C, M.10A(Order=6), M.11M, and M.14) is determined by the PU/RU source in the message.

LINK 11B. The source of Link 11B messages that do not include data source is as follows:

<u>LINK 11B Messages</u>	<u>Data Source</u>
M.2, M.82, M.3, M.83, M.4A,	PU/RU of the last received and acknowledged

MIL-STD-6016B

APPENDIX C

M.84A, M.5, M.85, M.6A, M.9A(AC=0) message on that track number.
M.9F(AC=0), M.89F(AC=0),
M.9F(AC=1), M.11D

M.9A(AC=3) PU/RU of the M.1 message received on the same channel on which the M.9A(AC=3) message was received.

M.9E, M.11B PU/RU of the last received M.9A(AC=6) message on the channel on which the message was last received.

M.10A See specific message rule.

M.811M PU/RU of the immediately preceding M.11M.

The data source of Link 11B messages that include data source (M.0, M.1, M.9A(AC=1, 2, 4, 5, 6, 7, 9), M.9B, M.9C, M.11M, M.14, M.15) is determined by the PU/RU source in the message.

GENERAL NOTE 3 MESSAGE LENGTH INDICATOR

The Message Length Indicator value indicates the additional 75-bit words that are part of this message. A maximum of seven additional words, either extension or continuation words, may be transmitted in a single time slot.

GENERAL NOTE 4 EMERGENCY/FORCE TELL INDICATORS

Since the M.9A(AC=5) message is not transmitted with every M.1, M.2, or M.3 message, the Emergency and Force Tell indicators are set to 0 or 1 in accordance with the track alert information held in the FJU's database on the track.

GENERAL NOTE 5 SPECIAL PROCESSING INDICATOR

LINK 16. The Special Processing Indicator (SPI) in the Link 11/11B message is set in accordance with the received J3.x, J5.4, J6.0, or J14.0 message

APPENDIX C

being forwarded. The SPI information is forwarded to Link 11 by setting the SPI bit in the M.1 message(s) preceding the forwarded data. On Link 11B, SPI information is forwarded in the M.9A (AC=0) message as part of an initial sequence. The one exception to this rule involves the forwarding of a J6.0 message as an M.11/.811M message sequence. Since the M.11M message contains a SPI field, the setting of the SPI bit in a preceding Link 11, M.1 or Link 11B, M.9A (AC=0) message is not required.

LINK 11. The Special Processing Indicator in the Link 16 surveillance message is set in accordance with the latest received M.1 message. The SPI in the J6.0 message is set in accordance with the received M.11M message.

LINK 11B. The Special Processing Indicator in the Link 16 surveillance message is set in accordance with the latest received and acknowledged M.9A(AC=0) message. The SPI in the J6.0 message is set in accordance with the received M.11M message.

GENERAL NOTE 6 SIMULATION INDICATOR

Units may originate and report simulated tracks on Links 11/11B/16 when such reports do not represent real (live) objects. Simulated tracks may be transmitted concurrently with reports of live tracks. On Link 16 the Simulation Indicator shall be set to 1 to indicate a simulated track and set to "0" to indicate a real track.

On Link 11, an M.9A(AC=0, SI=1) message precedes each report of a simulated track; the absence of an M.9A(AC=0, SI=1) message indicates a real track.

On Link 11B, an M.9A(AC=0, SI=1) message precedes each report of a simulated track once in each of six successive transmit opportunities or until an acknowledgement is received; an M.9A(AC=0, SI=0) message precedes each report of a real track until acknowledged.

If the simulated unit is a nonC² JU being forwarded to Link 11 or 11B, or a C² IU being forwarded to Link 11B, the M.9A (AC=0, SI=1) message shall precede appropriate messages. If the simulated unit is a C² IU being forwarded to Link 11, the M.1 (SIM=1) message will be part of the initial sequence.

MIL-STD-6016B

APPENDIX C

GENERAL NOTE 7 COURSE AND SPEED TO X DOT AND Y DOT

See MIL-STD-6016 paragraph 4.1.4.2.3. A Link 16 Speed greater than the maximum reportable Link 11/11B velocity will be translated to the maximum reportable velocity, maintaining the proper azimuth component of velocity as required to translate the Link 16 Course.

GENERAL NOTE 8 X DOT AND Y DOT TO COURSE AND SPEED

See MIL-STD-6016 paragraph 4.1.4.2.3. A Link 11/11B velocity greater than the maximum reportable Link 16 speed will be translated to the maximum reportable Link 16 Speed, and the appropriate Course.

GENERAL NOTE 9 LATITUDE/LONGITUDE

See MIL-STD-6016 paragraph 4.1.4.2.3.

GENERAL NOTE 10 ALTITUDE, ELEVATION, AND HEIGHT

The forwarded altitude, height or elevation shall be translated to the nearest value increment of the destination link. The FJU has the option of implementing for forwarding the single Scale Indicator (SI=0) on Link 11/11B. This provides the greatest range of height. Translations which result in one half increment will be rounded up to the next higher increment. The following are two examples:

a. A J3.2 altitude of 225 feet (Bit Code 9) will either be forwarded as 0 height (M.2 SI=0, M.82 Height Code=0) or as 218.75 feet (M.2 SI=1, M.82 Height Code=7).

b. A J3.2 altitude of 250 feet (Bit Code 10) will either be forwarded as 500 feet (M.2 SI=0, M.82 Height Code=1) or as 250 feet (M.2 SI=1, M.82 Height Code=8).

When the received value exceeds the largest value possible on the destination link, the received value shall be forwarded as No Statement or Unknown.

APPENDIX C

The altitude, elevation, and height ranges and scalings between Link 16 and Link 11/11B are depicted in GENERAL NOTE 10.1.

MIL-STD-6016B

APPENDIX C

GENERAL NOTE 10.1. Altitude, Elevation, and Height Translations (Sheet 1 of 3)

FOR Link 16 J2.0, J2.2, J3.2 AND J3.7 MESSAGES				
DATA ELEMENT	INCREMENT	RANGE	BIT CODE	REMARKS
ALTITUDE, 25 FT	25 FT.	0-204,750	0-8190	
		Altitude Unknown/No Statement	8191	

FOR Link 16 J3.0 MESSAGE				
DATA ELEMENT	INCREMENT	RANGE	BIT CODE	REMARKS
ALTITUDE, 100 FT 1	100 FT.	0-102,200	0-1022	Altitude, 100 Ft. 1 shall be forwarded as No Statement when Altitude, 100 Ft. 2 is other than No Statement. Altitude, 100 Ft. 1 represents the minimum altitude of an altitude block when Altitude 100, Ft. 2 is other than No Statement. Altitude blocks cannot be forwarded to Link 11/11B.
		NO STATEMENT	1023	

FOR Link 16 J2.3, J2.5, J2.6 AND J3.5 MESSAGES				
DATA ELEMENT	INCREMENT	RANGE	BIT CODE	REMARKS
ELEVATION, 25 FT	25 FT.	0-51,150	0-2046	
		Elevation Unknown/No Statement	2047	

FOR Link 16 J2.4 MESSAGE				
DATA ELEMENT	INCREMENT	RANGE	BIT CODE	REMARKS
DEPTH, 15 METERS	15 METERS	0-1,890	0-126	See individual data element translation tables for depth translations.
		NO STATEMENT	127	
DEPTH CATEGORY	--	--	0-10	

FOR Link 16 J3.4 MESSAGE				
DATA ELEMENT	INCREMENT	RANGE	BIT CODE	REMARKS
DEPTH, 15 METERS	15 METERS	0-1,890	0-126	See individual data element translation tables for depth translations.
		NO STATEMENT	127	
DEPTH CATEGORY	--	--	0-6	

MIL-STD-6016B

APPENDIX C

GENERAL NOTE 10.1. Altitude, Elevation, and Height Translations (Sheet 2 of 3)

FOR Link 11 M.81 MESSAGE					
E/C VALUE	SCALE INDICATOR	INCREMENT	RANGE	BIT CODE	REMARKS
0	0-1	NA	NA	NA	Forward Altitude as No Statement
1	0-1	NA	NA	NA	Forward Altitude as No Statement
2	0	IN 50 FOOT INCREMENTS	0 THROUGH 12,700 FEET	0-254	
			NO STATEMENT	255	
	1	IN 25 FOOT INCREMENTS	0 THROUGH 6,350 FEET	0-254	
			NO STATEMENT	255	
3	0	IN 500 FOOT INCREMENTS	0 THROUGH 127,000 FEET	0-254	
			NO STATEMENT	255	
	1	IN 31 1/4 FOOT INCREMENTS	0 THROUGH 7,937 1/2 FEET	0-254	
			NO STATEMENT	255	

FOR Link 11/11B M.2 AND M.82 MESSAGES				
SCALE INDICATOR	INCREMENT	RANGE	BIT CODE	REMARKS
0	500 Ft.	0 THROUGH 127,000 FEET	0-254	
		UNKNOWN	255	
1	31.25 Ft.	0 THROUGH 7,937 1/2 FEET	0-254	
		UNKNOWN	255	

FOR Link 11/11B M.84A MESSAGE				
DEPTH INDICATOR	INCREMENT	RANGE	BIT CODE	REMARKS
0	50 Ft.	0 THROUGH 3,150 FEET	0-63	See individual data element translation tables for specific translations of all depth values.
1	--	UNKNOWN/NO STATEMENT	0	
		Various named layers and undefined values	1-63	

FOR Link 11/11B M.85 MESSAGE				
HEIGHT/DEPTH SWITCH	INCREMENT	RANGE	BIT CODE	REMARKS
0	500 Ft.	0 THROUGH 127,000 FEET	0-254	
		UNKNOWN	255	
1	NA	NA	NA	Reports Depth. Forward J3.0 with Altitude, 100 Ft. 1 and Altitude, 100 Ft. 2 fields both set to 1023, No Statement.

APPENDIX C

GENERAL NOTE 11 DEPTH

Depth is reported on Link 16 in 15 meter increments, with a range of 0-1890 meters. Depth is reported on Link 11 in 50 foot increments. Since 3m. = 9.84ft., the conversion is approximated, using a ratio of 3 meters to 10 feet. When the received value exceeds the largest value possible on the destination link, the received value shall be forwarded as the maxim value on the destination link.

GENERAL NOTE 12 PU/RU ADDRESS/TRACK NUMBER, SOURCE

The Link 16 Track Number, Source data element contains 15 bits while the Link 11/11B PU/RU Address field contains only 7 bits. When translating from Link 11/11B to Link 16, the eight most significant bits of the Link 16 Track Number, Source data element must be zero, and the seven bits of the Link 11/11B PU/RU Address will become the seven least significant bits of the Link 16 Track Number, Source. When translating from Link 16 to Link 11/11B, the seven least significant bits of the Link 16 Track Number, Source when less than 00200 (octal) become the Link 11/11B PU/RU Address. See paragraph C.4.7.2 for forwarding of Link 16 C² units having an address of 00200 (octal) or greater.

GENERAL NOTE 13 TRACK NUMBER

To accommodate the forwarding of dissimilar TNs, the Association message in the Link 16 message series provides for the association of Link 11/11B, NATO Link 1, and JTIDS/MIDS TNs.

Two conversion procedures are required for TNs. The procedures are:

If a received TN is less than 7777 (octal), the TN will be forwarded without conversion except for the addition or deletion of leading zeros (seven most significant bit positions) to account for the difference in field size between Link 16 and Link 11/11B.

If an initial report (track, point, etc) with a TN greater than 7777 (octal) is received on Link 16, the FJU will assign an available Link 11/11B

APPENDIX C

TN to the subject entity and substitute the appropriate Link 16 or Link 11/11B TN in all forwarded messages concerning the entity. In addition, the FJU will transmit an association message on Link 16 reporting the relationship between the Link 16 and Link 11/11B TNs.

The following is an example of a Link 16 to Link 11 exchange of a 19-bit TN:

- a. A JU on Link 16 establishes a new track and reports it with TN AZ200.
- b. The FJU receives TN AZ200 and assigns it a Link 11 TN 3333.
- c. The FJU transmits:
 - (1) On Link 11, a track report with TN 3333.
 - (2) On Link 16, a message indicating that TN AZ200 is associated with TN 3333.

GENERAL NOTE 14 NOT USED

GENERAL NOTE 15 VALUE EQUIVALENCE

Valid decimal values and definitions are identical for Link 16 and Link 11/11B; however, the bit fields are different sizes.

GENERAL NOTE 16 NOT USED

GENERAL NOTE 17 AXIS ORIENTATION/BEARING

a. A Link 11/11B Bearing between 0 and 178 19/32 degrees is translated to the nearest whole degree as Link 16 Axis Orientation. When the Link 11/11B Bearing is between 180 and 358 19/32 degrees, subtract 180 degrees, then translate to the nearest whole degree as Link 16 Axis Orientation.

b. A Link 16 Axis Orientation between 0 and 179 degrees is translated to the nearest Link 11/11B bearing between 0 and 178 19/32. When the Link 16

APPENDIX C

Axis Orientation is No Statement and Area Major Axis and Area Minor Axis are other than No Statement, it will be translated to Link 11/11B Bearing = 0.

GENERAL NOTE 18 AREA MINOR AXIS AND AREA MAJOR AXIS

a. If divisible by 4, Link 11/11B Major Axis and Minor Axis between 0 and 244 are translated directly to Link 16 Area Major Axis and Minor Axis. If not divisible by 4, add 2 data miles and translate directly to Link 16 Area Major Axis and Minor Axis. Link 11/11B Major Axis and Minor Axis greater than 244 are translated to Link 16 Area Major Axis or Minor Axis = 244.

b. Link 16 Area Major Axis and Minor Axis are translated directly to Link 11/11B Major Axis and Minor Axis. If Link 16 Area Major Axis or Minor Axis is No Statement, the message is not translated to a Link 11 Area of Probability.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

MIL-STD-6016B

APPENDIX C

GENERAL NOTE 19 FREQUENCY CONVERSION

Conversion between Link 11/11B and Link 16 Frequencies shall be accomplished as follows:

a. Link 11/11B to Link 16:

(1) When translating M.6A Frequency, or when translating M.6B/M.86B or M.6D, Link 11/11B Frequency Multiplier (FM) = 0 (Frequency Range), set the Link 16 Frequency/Frequency Range Indicator (F/R IND) to 1, and determine Link 16 FM, 1 and 2, and Frequency, 1 and 2, from Link 11/11B Frequency as follows:

Link 16				Link 11/11B	
FM, 1	FREQ, 1	FM, 2	FREQ, 2	FREQ VALUE	FREQUENCY RANGE
0	0	0	0	0	NO STATEMENT
				14-16383	UNDEFINED
0	1	6	249	1	0-249 MHZ
6	250	6	499	2	250-499 MHZ
6	500	6	999	3	500-999 MHZ
6	1000	6	1999	4	1000-1999 MHZ
6	2000	6	2999	5	2000-2999 MHZ
6	3000	6	3999	6	3000-3999 MHZ
6	4000	6	5999	7	4000-5999 MHZ
6	6000	6	7999	8	6000-7999 MHZ
6	8000	6	9999	9	8000-9999 MHZ
6	10000	6	19999	10	10,000-19,999 MHZ
6	20000	6	39999	11	20,000-39,999 MHZ
6	40000	6	59999	12	40,000-59,999 MHZ
6	60000	6	100000	13	60,000-100,000 MHZ

(2) When translating M.6B/M.86B or M.6D, Link 11/11B FM $\neq$ 0, set Link 16 F/R IND to 0, set FM, 1 = Link 11/11B FM; set Frequency, 1 = Link 11/11B Frequency, and set FM, 2 and Frequency, 2 to No Statement (FM, 2 = 15, Frequency, 2 = 0).

b. Link 16 to Link 11/11B:

(1) To translate to the M.6A, when the Link 16 F/R IND = 0 (Frequency), which indicates that a single frequency is to be translated to a frequency range, translate the result of Link 16 (FM, 1 times Frequency, 1)

APPENDIX C

to the appropriate M.6A Frequency value that is defined by the range that includes the result of FM, 1 times Frequency, 1 (for example, a Link 16 Frequency of 8500 MHz would translate to an M.6A Frequency of 9, since 8500 falls in the range of 8000-9999 MHz). If Link 16 (FM, 1 times Frequency, 1) is greater than 100,000 MHz then Frequency value will be set to 0 (No Statement).

(2) To translate the M.6B/M.86B or M.6D, when the Link 16 F/R IND = 0 (Frequency), which indicates that a single frequency is to be translated, as opposed to a frequency range, if the result of Link 16 (FM, 1 times Frequency, 1) is less than or equal to $16,383 \times 10^7$ Hz directly translate the numerical value of (FM, 1 times Frequency, 1) to the appropriate values of Link 11/11B FM Frequency that yields the same result. If the result of Link 16 (FM, 1 times Frequency, 1) is greater than $16,383 \times 10^7$ Hz, then the M.86B or M.6D FM field shall be set to value 0 and the F/FR field shall be set to value 0 (No Statement).

(3) If the Link 16 F/R IND = 1 (Frequency Range), it indicates that a frequency range shall be translated to a frequency range in either the M.6A, M.6B/M.86B or M.6D. If translating to the M.6B/M.86B or M.6D, set M.86B or M.6D FM to 0. The FJU shall determine if the Link 16 lower and upper limits, as expressed by (FM, 1 times Frequency, 1) and (FM, 2 times Frequency, 2), respectively, are both contained within a single defined Link 11/11B Frequency Range, as listed below (the Link 11/11B Frequency Ranges are identical in the M.6A, M.86B or M.6D). If so, set Link 11/11B Frequency value accordingly. If not, set the Link 11/11B Frequency field to the value whose defined upper limit is closest to the result of (FM, 2 times Frequency, 2), as follows:

MIL-STD-6016B

APPENDIX C

Link 11/11B		Link 16
FREQUENCY VALUE	RANGE	FM, 2 X FREQ, 2
0	NO STATEMENT	0
1	0-249 MHZ	≤ 374 MHZ
2	250-499 MHZ	375-749 MHZ
3	500-999 MHZ	750-1499 MHZ
4	1000-1999 MHZ	1500-2499 MHZ
5	2000-2999 MHZ	2500-3499 MHZ
6	3000-3999 MHZ	3500-4999 MHZ
7	4000-5999 MHZ	5000-6999 MHZ
8	6000-7999 MHZ	7000-8999 MHZ
9	8000-9999 MHZ	9000-14,999 MHZ
10	10,000-19,999 MHZ	15,000-29,999 MHZ
11	20,000-39,999 MHZ	30,000-49,999 MHZ
12	40,000-59,999 MHZ	50,000-79,999 MHZ
13	60,000-100,000 MHZ	> 79,999 MHZ

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

MIL-STD-6016B

APPENDIX C

GENERAL NOTE 20 AIR IDENTITY TRANSLATIONS

General notes 20.1 through 20.3 shall be used to translate a Link 16 Air Track Identity to a Link 11/11B Air Track Identity, and vice versa.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

GENERAL NOTE 20.1. LINK 16 IDENTITY VERSUS LINK 11/11B IDENTITY AND PRIMARY IDENTITY AMPLIFICATION EQUIVALENCE

Link 16		Link 11/11B				
IDENTITY	VALUE	IDENTITY	VALUE	PRIMARY IDENTITY AMPLIFICATION	VALUE	OTHER
PENDING	0	UNKNOWN	0	PENDING	0	
UNDEFINED	7					
UNKNOWN	1	UNKNOWN	0	UNKNOWN	1	
ASSUMED FRIEND	2	UNKNOWN	0	ASSUMED FRIEND	2	
FRIEND	3	FRIEND	1 or 3	AS APPROPRIATE	0-3	SEE GENERAL NOTE 20.3.
NEUTRAL	4	FRIEND	1	GENERAL	0	ONLY WITH ID AMP=1, NEUTRAL.
SUSPECT	5	UNKNOWN	0	SUSPECT	3	
HOSTILE	6	HOSTILE	2	GENERAL	0	
				UNDEFINED	1-3	

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

GENERAL NOTE 20.2. AIR IDENTITY TRANSLATION SPECIAL CASES (Sheet 1 of 2)

Link 16				Link 11/11B		
IDENTITY	AIR PLATFORM	AIR PLATFORM ACTIVITY	OTHER INDICATIONS ¹	IDENTITY	PRIMARY IDENTITY AMPLIFICATION	IDENTITY AMPLIFICATION
SUSPECT	ALL (NS)	ALL (NS)	SPECIAL INTEREST ² INDICATOR=1	UNKNOWN	UNKNOWN	ZOMBIE/INTRUDER
FRIEND	ALL (NS)	ALL (NS)	SPECIAL INTEREST ² INDICATOR=1	FRIEND	SPECIAL MISSION	KILO/YOKE
PENDING	ALL	ALL	SPECIAL INTEREST ³ INDICATOR=1	UNKNOWN	PENDING	NO STATEMENT
UNKNOWN	ALL	ALL	SPECIAL INTEREST ³ INDICATOR=1	UNKNOWN	UNKNOWN	NS
ASSUMED FRIEND	ALL	ALL	SPECIAL INTEREST ³ INDICATOR=1	UNKNOWN	ASSUMED FRIEND	NS
NEUTRAL	ALL	ALL	SPECIAL INTEREST ³ INDICATOR=1	FRIEND	GENERAL	NEUTRAL
HOSTILE	ALL	ALL	SPECIAL INTEREST ³ INDICATOR=1	HOSTILE	GENERAL	NS

¹ If both Special Interest Indicator and Exercise Indicator equal 1, then GENERAL NOTE 20.2 (Sheet 2 of 2) shall be used for translation.

² The Special Interest Indicator has two way forwarding only with Link 16 Identity of SUSPECT or FRIEND.

³ These Identities with Special Interest Indicator are only forwarded from Link 16 to Link 11/11B and not vice versa.

GENERAL NOTE 20.2. AIR IDENTITY TRANSLATION SPECIAL CASES (Sheet 2 of 2)

Link 16				Link 11/11B		
IDENTITY AMPLIFYING DESCRIPTOR	AIR PLATFORM	AIR PLATFORM ACTIVITY	OTHER INDICATIONS	IDENTITY	PRIMARY IDENTITY AMPLIFICATION	IDENTITY AMPLIFICATION
EXERCISE FRIEND	ALL (NS)	ALL (NS)	EXERCISE INDICATOR=1	FRIEND	GENERAL	MIL TRAINING
All others except FAKER and JOKER						NEUTRALIZED FAKER
JOKER	ALL (NS)	ALL (NS)	EXERCISE INDICATOR=1	FRIEND	GENERAL	JOKER
FAKER	ALL (EW)	JAMMER	EXERCISE INDICATOR=1	FRIEND	SPECIAL MISSION	JAMMER (FAKER) (NATO)
FAKER	ALL (NS)	ALL OTHERS (NS)	EXERCISE INDICATOR=1	FRIEND	SPECIAL MISSION	FAKER

APPENDIX C

GENERAL NOTE 20.3. AIR IDENTITY TRANSLATION (Sheet 1 of 15)

If a track is being reported on Link 11/11B and the table offers multiple Link 16 selections for the translation and vice versa, forward the first (top) selection. If the Link 16 choice is "ALL (X)," where "X" represents No Statement (NS) or another specific value, forward "X" if no other value for Platform and/or Platform Activity is held in the FJU database. If a value other than No Statement for Platform and/or Platform Activity has been previously reported on Link 16 and that value is translated to Link 11/11B, then the Link 16 values will be retained for subsequent forwarding to Link 16. If the Link 11/11B changes Identity (ID), Primary Identity Amplification (PRI AMP), and/or Identity Amplification (ID AMP), the Link 16 values previously held will be discarded and no longer forwarded. For example, if an R² JU reports Assumed Friend, Fighter/Bomber, and Interdiction for Identity, Platform, and Platform Activity, respectively, then the translation to Link 11/11B would be Unknown, Assumed Friend, Bomber for ID, PRI AMP, and ID AMP, respectively. The FJU, though, retains Assumed Friend, Fighter/Bomber, and Interdiction in the database. When a PU/RU assumes R² for this track and reports Unknown, Assumed Friend, and Bomber, the FJU will forward the retained values of Assumed Friend, Fighter/Bomber, and Interdiction. If the PU/RU changes the values to Unknown, Assumed Friend and Fighter, the FJU will forward Assumed Friend, Fighter, and No Statement onto Link 16. (See sheet 6 of GENERAL NOTE 20.3.)

Within a specific Identity whenever "ALL" appears in the Link 16 Platform or Platform Activity columns, it means "ALL PLATFORMS or PLATFORM ACTIVITIES" including undefined values unless a specific value appears elsewhere in the Platform or Platform Activity columns.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

GENERAL NOTE 20.3. AIR IDENTITY TRANSLATION (Sheet 2 of 15)

Link 16			Link 11/11B		
IDENTITY	AIR PLATFORM	AIR PLATFORM ACTIVITY	IDENTITY	PRIMARY IDENTITY AMPLIFICATION	IDENTITY AMPLIFICATION
PENDING	ALL (NS)	ALL (NS)	UNKNOWN	PENDING	NO STATEMENT
UNKNOWN	NO STATEMENT	(NS)	UNKNOWN	UNKNOWN	NS
					UNDEFINED
	BOMBER	ALL (NS)	UNKNOWN	UNKNOWN	BOMBER
	FIGHTER BOMBER	MINELAYING SPECIAL WEAPONS ATTACK AIR ASSAULT CONVENTIONAL ATTACK INTERDICTION CLOSE AIR SUPPORT (CAS) GROUND ATTACK TACTICS (GAT) STRIKE WARFARE ANTISUBMARINE WARFARE (ASW) ANTISURFACE WARFARE			
	ATTACK	ALL			
	FIGHTER	ALL (NS)			
	FIGHTER BOMBER	ALL EXCEPT THOSE LISTED ABOVE FOR FIGHTER/BOMBER	UNKNOWN	UNKNOWN	FIGHTER
	INTERCEPTOR	ALL			

C-903

APPENDIX C

MIL-STD-6016B

GENERAL NOTE 20.3. AIR IDENTITY TRANSLATION (Sheet 3 of 15)

Link 16			Link 11/11B		
IDENTITY	AIR PLATFORM	AIR PLATFORM ACTIVITY	IDENTITY	PRIMARY IDENTITY AMPLIFICATION	IDENTITY AMPLIFICATION
UNKNOWN	AIRBORNE EARLY WARNING AND CONTROL (AEW)	ALL (NS)	UNKNOWN	UNKNOWN	AEW/RECCE/EW/DECOY
	AIRBORNE COMMAND POST (ACP) RECONNAISSANCE ELECTRONIC WARFARE (EW) MARITIME PATROL AIRCRAFT (MPA) DECOY PATROL AIRBORNE LAND SURVEILLANCE	ALL			
	HELICOPTER (HELO)	ALL (NS)	UNKNOWN	UNKNOWN	HELO/TRANSPORT
	ATTACK HELICOPTER HELICOPTER GUNSHIP ANTISUBMARINE WARFARE HELICOPTER (ASW HELO) MINE WARFARE HELICOPTER TRANSPORT HELICOPTER TRANSPORT	ALL			
	MISSILE CARRIER	ALL (NS)	UNKNOWN	UNKNOWN	MISSILE PLATFORM
	MISSILE CONTROL UNIT	ALL			
	ALL OTHERS (NS)	ALL (NS)	UNKNOWN	UNKNOWN	NS
	NO STATEMENT	NO STATEMENT	UNKNOWN	SUSPECT	NS
SUSPECT	DRONE	ALL	UNKNOWN	SUSPECT	DRONE/RPV
	REMOTELY PILOTED VEHICLE (RPV)				

C-904

APPENDIX C

MIL-STD-6016B

GENERAL NOTE 20.3. AIR IDENTITY TRANSLATION (Sheet 4 of 15)

Link 16			Link 11/11B		
IDENTITY	AIR PLATFORM	AIR PLATFORM ACTIVITY	IDENTITY	PRIMARY IDENTITY AMPLIFICATION	IDENTITY AMPLIFICATION
SUSPECT	BOMBER	ALL EXCEPT XRAY (NS)	UNKNOWN	SUSPECT	BOMBER
	FIGHTER BOMBER	MINELAYING SPECIAL WEAPONS ATTACK AIR ASSAULT CONVENTIONAL ATTACK INTERDICTION CLOSE AIR SUPPORT (CAS) GROUND ATTACK TACTICS (GAT) STRIKE WARFARE ANTISUBMARINE WARFARE (ASW) ANTISURFACE WARFARE			
	ATTACK	ALL EXCEPT XRAY			
	FIGHTER	ALL EXCEPT XRAY (NS)	UNKNOWN	SUSPECT	FIGHTER
	FIGHTER BOMBER	ALL EXCEPT XRAY AND THOSE LISTED ABOVE FOR FIGHTER/BOMBER			
	INTERCEPTOR	ALL EXCEPT XRAY			

C-905

APPENDIX C

MIL-STD-6016B

GENERAL NOTE 20.3. AIR IDENTITY TRANSLATION (Sheet 5 of 15)

Link 16			Link 11/11B					
IDENTITY	AIR PLATFORM	AIR PLATFORM ACTIVITY	IDENTITY	PRIMARY IDENTITY AMPLIFICATION	IDENTITY AMPLIFICATION			
SUSPECT	AIRBORNE EARLY WARNING AND CONTROL (AEW)	ALL EXCEPT XRAY (NS)	UNKNOWN	SUSPECT	AEW/RECCE/EW/DECOY			
	AIRBORNE COMMAND POST (ACP) RECONNAISSANCE ELECTRONIC WARFARE (EW) MARITIME PATROL AIRCRAFT (MPA) DECOY PATROL AIRBORNE LAND SURVEILLANCE	ALL EXCEPT XRAY						
	HELICOPTER (HELO)	ALL EXCEPT XRAY (NS)				UNKNOWN	SUSPECT	HELO/TRANSPORT
	ATTACK HELICOPTER HELICOPTER GUNSHIP ANTISUBMARINE WARFARE HELICOPTER (ASW HELO) MINE WARFARE HELICOPTER TRANSPORT HELICOPTER TRANSPORT	ALL EXCEPT XRAY						
	MISSILE CARRIER	ALL EXCEPT XRAY (NS)	UNKNOWN	SUSPECT	MISSILE PLATFORM			
	MISSILE CONTROL UNIT	ALL EXCEPT XRAY						
	ALL (NS)	XRAY	UNKNOWN	SUSPECT	XRAY/INTRUDER			
	ALL (NS)	ALL EXCEPT XRAY (NS)	UNKNOWN	SUSPECT	NS			
	ASSUMED FRIEND	NO STATEMENT	NO STATEMENT	UNKNOWN	ASSUMED FRIEND	NS		
						UNDEFINED		

C-906

APPENDIX C

MIL-STD-6016B

GENERAL NOTE 20.3. AIR IDENTITY TRANSLATION (Sheet 6 of 15)

Link 16			Link 11/11B		
IDENTITY	AIR PLATFORM	AIR PLATFORM ACTIVITY	IDENTITY	PRIMARY IDENTITY AMPLIFICATION	IDENTITY AMPLIFICATION
ASSUMED FRIEND	BOMBER	ALL (NS)	UNKNOWN	ASSUMED FRIEND	BOMBER
	FIGHTER BOMBER	MINELAYING SPECIAL WEAPONS ATTACK AIR ASSAULT CONVENTIONAL ATTACK INTERDICTION CLOSE AIR SUPPORT (CAS) GROUND ATTACK TACTICS (GAT) STRIKE WARFARE ANTISUBMARINE WARFARE (ASW) ANTISURFACE WARFARE			
	ATTACK	ALL			
	FIGHTER	ALL (NS)	UNKNOWN	ASSUMED FRIEND	FIGHTER
	FIGHTER BOMBER	ALL EXCEPT THOSE LISTED ABOVE FOR FIGHTER/BOMBER			
	INTERCEPTOR	ALL			

C-907

APPENDIX C

MIL-STD-6016B

GENERAL NOTE 20.3. AIR IDENTITY TRANSLATION (Sheet 7 of 15)

Link 16			Link 11/11B		
IDENTITY	AIR PLATFORM	AIR PLATFORM ACTIVITY	IDENTITY	PRIMARY IDENTITY AMPLIFICATION	IDENTITY AMPLIFICATION
ASSUMED FRIEND	AIRBORNE EARLY WARNING AND CONTROL (AEW)	ALL (NS)	UNKNOWN	ASSUMED FRIEND	AEW/RECCE/EW/DECOY
	AIRBORNE COMMAND POST (ACP) RECONNAISSANCE ELECTRONIC WARFARE (EW) MARITIME PATROL AIRCRAFT (MPA) DECOY PATROL AIRBORNE LAND SURVEILLANCE	ALL			
	HELICOPTER (HELO)	ALL (NS)	UNKNOWN	ASSUMED FRIEND	HELO/TRANSPORT
	ATTACK HELICOPTER HELICOPTER GUNSHIP ANTISUBMARINE WARFARE HELICOPTER (ASW HELO) MINE WARFARE HELICOPTER TRANSPORT HELICOPTER TRANSPORT	ALL			
	MISSILE CARRIER	ALL (NS)	UNKNOWN	ASSUMED FRIEND	MISSILE PLATFORM
	MISSILE CONTROL UNIT	ALL			
	ALL OTHERS (NS)	ALL (NS)	UNKNOWN	ASSUMED FRIEND	NS
	NO STATEMENT	NO STATEMENT	UNKNOWN	ASSUMED FRIEND	NS
HOSTILE	NO STATEMENT	NO STATEMENT	HOSTILE	GENERAL	NS
				UNDEFINED	UNDEFINED

C-908

APPENDIX C

MIL-STD-6016B

GENERAL NOTE 20.3. AIR IDENTITY TRANSLATION (Sheet 8 of 15)

Link 16			Link 11/11B		
IDENTITY	AIR PLATFORM	AIR PLATFORM ACTIVITY	IDENTITY	PRIMARY IDENTITY AMPLIFICATION	IDENTITY AMPLIFICATION
HOSTILE	MISSILE	ALL (NS)	HOSTILE	GENERAL	MISSILE
	SURFACE-TO-AIR MISSILE (SAM)	ALL			
	AIR-TO-SURFACE MISSILE (ASM)				
	SURFACE-TO-SURFACE MISSILE (SSM)				
	AIR-TO-AIR MISSILE (AAM)				
	SUBSURFACE-TO-SURFACE MISSILE				
	SURFACE-TO-SUBSURFACE MISSILE				
	CRUISE MISSILE				
	BALLISTIC MISSILE				
	DRONE				
	REMOTELY PILOTED VEHICLE (RPV)				

C-909

APPENDIX C

MIL-STD-6016B

GENERAL NOTE 20.3. AIR IDENTITY TRANSLATION (Sheet 9 of 15)

Link 16			Link 11/11B		
IDENTITY	AIR PLATFORM	AIR PLATFORM ACTIVITY	IDENTITY	PRIMARY IDENTITY AMPLIFICATION	IDENTITY AMPLIFICATION
HOSTILE	BOMBER	ALL EXCEPT JAMMER (NS)	HOSTILE	GENERAL	BOMBER
	FIGHTER BOMBER	MINELAYING SPECIAL WEAPONS ATTACK AIR ASSAULT CONVENTIONAL ATTACK INTERDICTION CLOSE AIR SUPPORT (CAS) GROUND ATTACK TACTICS (GAT) STRIKE WARFARE ANTISUBMARINE WARFARE (ASW) ANTISURFACE WARFARE			
	ATTACK	ALL EXCEPT JAMMER			
	FIGHTER	ALL EXCEPT JAMMER (NS)	HOSTILE	GENERAL	FIGHTER
	FIGHTER BOMBER	ALL EXCEPT JAMMER AND THOSE LISTED ABOVE FOR FIGHTER/BOMBER			
	INTERCEPTOR	ALL EXCEPT JAMMER			

C-910

APPENDIX C

MIL-STD-6016B

GENERAL NOTE 20.3. AIR IDENTITY TRANSLATION (Sheet 10 of 15)

Link 16			Link 11/11B		
IDENTITY	AIR PLATFORM	AIR PLATFORM ACTIVITY	IDENTITY	PRIMARY IDENTITY AMPLIFICATION	IDENTITY AMPLIFICATION
HOSTILE	AIRBORNE EARLY WARNING AND CONTROL (AEW)	ALL EXCEPT JAMMER (NS)	HOSTILE	GENERAL	AEW/RECCE/EW/DECOY
	AIRBORNE COMMAND POST (ACP) RECONNAISSANCE ELECTRONIC WARFARE (EW) MARITIME PATROL AIRCRAFT (MPA) DECOY PATROL AIRBORNE LAND SURVEILLANCE	ALL EXCEPT JAMMER			
	HELICOPTER (HELO)	ALL EXCEPT JAMMER (NS)	HOSTILE	GENERAL	HELO/TRANSPORT
	ATTACK HELICOPTER HELICOPTER GUNSHIP ANTISUBMARINE WARFARE HELICOPTER (ASW HELO) MINE WARFARE HELICOPTER TRANSPORT HELICOPTER TRANSPORT	ALL EXCEPT JAMMER			
	MISSILE CARRIER	ALL EXCEPT JAMMER (NS)	HOSTILE	GENERAL	MISSILE PLATFORM
	MISSILE CONTROL UNIT	ALL EXCEPT JAMMER			
	ALL (NS)	JAMMER	HOSTILE	GENERAL	JAMMER
	ALL OTHERS (NS)	ALL EXCEPT JAMMER (NS)	HOSTILE	GENERAL	NS
NEUTRAL	ALL (NS)	ALL (NS)	FRIEND	GENERAL	NEUTRAL
FRIEND	NO STATEMENT	NO STATEMENT	FRIEND	GENERAL	NS
				UNDEFINED	UNDEFINED

C-911

APPENDIX C

MIL-STD-6016B

GENERAL NOTE 20.3. AIR IDENTITY TRANSLATION (Sheet 11 of 15)

Link 16			Link 11/11B		
IDENTITY	AIR PLATFORM	AIR PLATFORM ACTIVITY	IDENTITY	PRIMARY IDENTITY AMPLIFICATION	IDENTITY AMPLIFICATION
FRIEND	CIVIL, AIRLINER	ALL (NS)	FRIEND	GENERAL	NONMIL
	CIVIL, GENERAL	ALL			
	MISSILE	ALL (NS)	FRIEND	GENERAL	MISSILE
	SURFACE-TO-AIR MISSILE (SAM)	ALL			
	AIR-TO-SURFACE MISSILE (ASM)				
	SURFACE-TO-SURFACE MISSILE (SSM)				
	AIR-TO-AIR MISSILE (AAM)				
	SUBSURFACE-TO-SURFACE MISSILE				
	SURFACE-TO-SUBSURFACE MISSILE				
	CRUISE MISSILE				
	BALLISTIC MISSILE				
	ALL (NS) EXCEPT FIGHTER, FIGHTER/BOMBER AND INTERCEPTOR WITH RTB	RETURN TO BASE (RTB)	FRIEND	GENERAL	RTB
	HELICOPTER (HELO) MINE WARFARE HELICOPTER	ALL EXCEPT HELO ACTIVITIES LISTED BELOW (NS)	FRIEND	HELO	NS
	ANTISUBMARINE WARFARE HELICOPTER (ASW HELO)	ALL (NS)	FRIEND	HELO	ASW
	HELICOPTER (HELO) ALL HELO PLATFORMS WHEN ACTIVITY = ASW OR DIPPING	ANTISUBMARINE WARFARE (ASW) DIPPING			

C-912

APPENDIX C

MIL-STD-6016B

GENERAL NOTE 20.3. AIR IDENTITY TRANSLATION (Sheet 12 of 15)

Link 16			Link 11/11B		
IDENTITY	AIR PLATFORM	AIR PLATFORM ACTIVITY	IDENTITY	PRIMARY IDENTITY AMPLIFICATION	IDENTITY AMPLIFICATION
FRIEND	HELICOPTER (HELO)	SEARCH AND RESCUE (SAR) RESCUE HELO	FRIEND	HELO	SAR
	ALL HELO PLATFORMS WHEN ACTIVITY = SAR OR RESCUE HELICOPTER (HELO)				
	HELICOPTER GUNSHIP ATTACK HELICOPTER	ALL (NS)	FRIEND	HELO	GUN SHIP
	HELICOPTER (HELO) ALL HELO PLATFORMS WHEN ACTIVITY IS AS LISTED	RECONNAISSANCE SURVEILLANCE PATROL (OCEAN SURVEILLANCE) SEARCH	FRIEND	HELO	RECON/RECCE
	TRANSPORT HELICOPTER ALL HELO PLATFORMS WHEN ACTIVITY = LOGISTICS SUPPORT, AIRLIFT, TROOPLIFT, OR MEDEVAC	LOGISTICS SUPPORT AIRLIFT (TRANSPORT)	FRIEND	HELO	LOGISTIC
		TROOPLIFT	FRIEND	HELO	TROOPLIFT
		AIR ASSAULT	FRIEND	HELO	MEDEVAC
		MEDICAL EVACUATION (MEDEVAC)	FRIEND	HELO	MEDEVAC
	BOMBER	ALL (NS)	FRIEND	STRIKE/SUPPORT/BOMBER	NS
	ATTACK	ALL			
	MISSILE CARRIER MISSILE CONTROL UNIT FIXED WING GUNSHIP				
	TACTICAL SUPPORT	ALL EXCEPT ASW, CAS, LOGISTICS, SUPPORT, INTERDICTION			

C-913

APPENDIX C

MIL-STD-6016B

GENERAL NOTE 20.3. AIR IDENTITY TRANSLATION (Sheet 13 of 15)

Link 16			Link 11/11B		
IDENTITY	AIR PLATFORM	AIR PLATFORM ACTIVITY	IDENTITY	PRIMARY IDENTITY AMPLIFICATION	IDENTITY AMPLIFICATION
FRIEND	FIGHTER BOMBER	MINELAYING SPECIAL WEAPONS ATTACK AIR ASSAULT CONVENTIONAL ATTACK STRIKE WARFARE ANTISUBMARINE WARFARE (ASW) ANTISURFACE WARFARE	FRIEND	STRIKE/SUPPORT/BOMBER	NS
	ANTISUBMARINE WARFARE (ASW)	ALL (NS)	FRIEND	STRIKE/SUPPORT/BOMBER	ASW
	MARITIME PATROL AIRCRAFT (MPA)	ALL			
	ALL EXCEPT HELOS	ANTISUBMARINE WARFARE (ASW)			
	TANKER	ALL (NS)	FRIEND	STRIKE/SUPPORT/BOMBER	TANKER (GENERAL)
	TANKER (BOOM ONLY)	ALL (NS)	FRIEND	STRIKE/SUPPORT/BOMBER	TANKER (BOOM)
	TANKER (DROGUE ONLY)	ALL (NS)	FRIEND	STRIKE/SUPPORT/BOMBER	TANKER (DROGUE)
	ALL (TACTICAL SUPPORT)	CLOSE AIR SUPPORT (CAS)	FRIEND	STRIKE/SUPPORT/BOMBER	CAS/DAS
	LOGISTIC	ALL (LOGISTICS SUPPORT)	FRIEND	STRIKE/SUPPORT/BOMBER	LOGISTIC
	TRANSPORT	ALL			
	ALL	LOGISTICS SUPPORT			
	ALL (NS)	INTERDICTION	FRIEND	STRIKE/SUPPORT/BOMBER	INTERDICTION

C-914

APPENDIX C

MIL-STD-6016B

GENERAL NOTE 20.3. AIR IDENTITY TRANSLATION (Sheet 14 of 15)

Link 16			Link 11/11B		
IDENTITY	AIR PLATFORM	AIR PLATFORM ACTIVITY	IDENTITY	PRIMARY IDENTITY AMPLIFICATION	IDENTITY AMPLIFICATION
FRIEND	FIGHTER INTERCEPTOR FIGHTER BOMBER	ALL EXCEPT RTB, RESCAP, CAP, ASW, LOGISTICS SUPPORT, INTERDICTION (NS)	FRIEND	INT/FIGHTER	NS UNAVAILABLE UNDEFINED
	ALL EXCEPT HELOS (FIGHTER)	RESCUE COMBAT AIR PATROL (RESCAP)	FRIEND	INT/FIGHTER	RESCAP
		COMBAT AIR PATROL (CAP)	FRIEND	INT/FIGHTER	CAP
	FIGHTER INTERCEPTOR FIGHTER BOMBER	RETURN TO BASE (RTB)	FRIEND	INT/FIGHTER	RTB
	DRONE REMOTELY PILOTED VEHICLE (RPV)	ALL	FRIEND	INT/FIGHTER	DRONE/RPV
	NO STATEMENT	SPECIAL	FRIEND	SPECIAL MISSION	NS
	AIRBORNE EARLY WARNING AND CONTROL (AEW) AIRBORNE COMMAND POST (ACP) AIRBORNE LAND SURVEILLANCE	ALL (NS)	FRIEND	SPECIAL MISSION	AEW/ARP/ABCCC
	ALL	COMMUNICATIONS RELAY AIRBORNE EARLY WARNING (AEW) AIRBORNE COMMAND POST (ACP) COMMAND AND CONTROL			
	SEARCH AND RESCUE (SAR)	ALL (SAR)	FRIEND	SPECIAL MISSION	SAR
	ALL EXCEPT HELOS	SAR			

C-915

APPENDIX C

MIL-STD-6016B

GENERAL NOTE 20.3. AIR IDENTITY TRANSLATION (Sheet 15 of 15)

C-916

Link 16			Link 11/11B		
IDENTITY	AIR PLATFORM	AIR PLATFORM ACTIVITY	IDENTITY	PRIMARY IDENTITY AMPLIFICATION	IDENTITY AMPLIFICATION
FRIEND	ELECTRONIC WARFARE (EW)	ALL (SAR)	FRIEND	SPECIAL MISSION	EW
	ALL	ELECTRONIC WARFARE (EW) ES ELECTRONIC ATTACK (EA) JAMMER CHAFF LAYING			
	RECONNAISSANCE PATROL	ALL (NS)	FRIEND	SPECIAL MISSION	RECON/RECCE
	ALL EXCEPT HELOS	RECONNAISSANCE SURVEILLANCE PATROL (OCEAN SURVEILLANCE) POLICING SEARCH			
	ALL OTHERS (NS)	ALL OTHERS (NS)	FRIEND	GENERAL	NS

APPENDIX C

MIL-STD-6016B

APPENDIX C

GENERAL NOTE 21 SURFACE IDENTITY TRANSLATION

General notes 21.1 through 21.3 shall be used to translate a Link 16 Surface (Maritime) Track Identity to a Link 11/11B Surface Track Identity, and vice versa.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

GENERAL NOTE 21.1. LINK 16 IDENTITY VERSUS LINK 11/11B IDENTITY AND PRIMARY IDENTITY AMPLIFICATION
EQUIVALENCE

Link 16		Link 11/11B				
IDENTITY	VALUE	IDENTITY	VALUE	PRIMARY IDENTITY AMPLIFICATION	VALUE	OTHER
PENDING	0	UNKNOWN	0	PENDING	0	
UNKNOWN	1	UNKNOWN	0	UNKNOWN	1	
ASSUMED FRIEND	2	UNKNOWN	0	ASSUMED FRIEND	2	
FRIEND	3	FRIEND	1 OR 3	AS APPROPRIATE	0-3	SEE GENERAL NOTE 21.3.
NEUTRAL	4	FRIEND	1	GENERAL	0	ONLY WITH ID AMP = 1, NEUTRAL.
SUSPECT	5	UNKNOWN	0	SUSPECT	3	
HOSTILE	6	HOSTILE	2	GENERAL	0	
				UNDEFINED	1-3	

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

GENERAL NOTE 21.2. SURFACE (MARITIME) TRANSLATION SPECIAL CASES

Link 16				Link 11/11B		
IDENTITY AMPLIFYING DESCRIPTOR	PLATFORM	PLATFORM ACTIVITY	OTHER INDICATIONS ¹	IDENTITY	PRIMARY IDENTITY AMPLIFICATION	IDENTITY AMPLIFICATION
EXERCISE FRIEND	ALL (NS)	ALL (NS)	EXERCISE INDICATOR=1	FRIEND	GENERAL	NS
ALL OTHERS EXCEPT FAKER AND JOKER						NEUTRALIZED FAKER
JOKER	ALL (NS)	ALL (NS)	EXERCISE INDICATOR=1	FRIEND	GENERAL	JOKER
FAKER	ALL (NS)	ALL (NS)	EXERCISE INDICATOR=1	FRIEND	GENERAL	FAKER

¹ The Special Interest Indicator shall be ignored for forwarding in all cases.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

APPENDIX C

GENERAL NOTE 21.3. SURFACE (MARITIME) IDENTITY TRANSLATION (Sheet 1 of 9)

If a track is being reported on Link 11/11B and the table offers multiple Link 16 selections for the translation and vice versa, forward the first (top) selection. If the Link 16 choice is "ALL (X)," where "X" represents No Statement (NS) or another specific value forward "X" provided no other value for Platform and/or Platform Activity is held in the FJU database. If a value other than No Statement for Platform and/or Platform Activity has been previously reported on Link 16 and that value is translated to Link 11/11B, then the Link 16 values will be retained for subsequent forwarding to Link 16. If the Link 11/11B changes Identity (ID), Primary Identity Amplification (PRI AMP), and/or Identity Amplification (ID AMP), the Link 16 values previously held will be discarded and no longer forwarded. For example, if an R² JU reports Assumed Friend, Ocean Research, and Surveying for Identity, Platform, and Platform Activity, respectively, then the translation to Link 11/11B would be Unknown, Assumed Friend, and Non-MIL for ID, PRI AMP, and ID AMP, respectively. The FJU, though, retains Assumed Friend, Ocean Research, and Surveying in the database. When a PU/RU assumes R² for this track and reports Unknown, Assumed Friend, and Non-MIL, the FJU will forward the retained values of Assumed Friend, Ocean Research, and Surveying. If the PU/RU changes the values to Unknown, Assumed Friend, and SIGINT, the FJU will forward Assumed Friend, Intelligence Collector, and Intelligence Collecting onto Link 16. (See sheet 4 of GENERAL NOTE 21.3.)

Within a specific identity whenever "ALL" appears in the Link 16 Platform or Platform Activity columns, it means "ALL PLATFORMS or PLATFORM ACTIVITIES" including undefined values, unless a specific value appears elsewhere in the PLATFORM or PLATFORM ACTIVITY columns.

MIL-STD-6016B

APPENDIX C

This page is intentionally left blank.

GENERAL NOTE 21.3. SURFACE (MARITIME) IDENTITY TRANSLATION (Sheet 2 of 9)

Link 16			Link 11/11B		
IDENTITY	SURFACE (MARITIME) PLATFORM	SURFACE (MARITIME) PLATFORM ACTIVITY	IDENTITY	PRIMARY IDENTITY AMPLIFICATION	IDENTITY AMPLIFICATION
PENDING	ALL (NS)	ALL (NS)	UNKNOWN	PENDING	NS
UNKNOWN	NO STATEMENT	ALL (NS)	UNKNOWN	UNKNOWN	NS
	AIRCRAFT CARRIER (CV)	ALL (NS)	UNKNOWN	UNKNOWN	AIRCRAFT CARRIER
	CRUISER	ALL (NS)	UNKNOWN	UNKNOWN	CG/DD
	BATTLESHIP DESTROYER FRIGATE	ALL			
	FAST PATROL BOAT	ALL (NS)	UNKNOWN	UNKNOWN	PB/PG
	AMPHIBIOUS	ALL (NS)	UNKNOWN	UNKNOWN	AMPHIBIOUS
	LHA/LHD AMPHIBIOUS ASSAULT COMMAND SHIP (LCC) LANDING CRAFT (LC) LANDING PLATFORM LANDING SHIP AMPHIBIOUS GENERAL ASSAULT	ALL			
	ALL	AMPHIBIOUS WARFARE			
	NON-MILITARY	ALL (NS)			NONMIL
	HOSPITAL SHIP SURVEY VESSEL OCEAN RESEARCH FISHING VESSEL MERCHANT VESSEL	ALL			
	ALL	FISHING NONCOMBATANT OPERATIONS			
	SURFACED SUBMARINE	ALL (NS)	UNKNOWN	UNKNOWN	SURFACED SUBMARINE

C-925

APPENDIX C

MIL-STD-6016B

GENERAL NOTE 21.3. SURFACE (MARITIME) IDENTITY TRANSLATION (Sheet 3 of 9)

Link 16			Link 11/11B		
IDENTITY	SURFACE (MARITIME) PLATFORM	SURFACE (MARITIME) PLATFORM ACTIVITY	IDENTITY	PRIMARY IDENTITY AMPLIFICATION	IDENTITY AMPLIFICATION
UNKNOWN	INTELLIGENCE COLLECTOR	ALL (INTELLIGENCE COLLECTING)	UNKNOWN	UNKNOWN	SIGINT
	ALL	ELECTRONIC WARFARE (EW) INTELLIGENCE COLLECTING ELECTRONIC WARFARE SUPPORT (ES) ELECTRONIC ATTACK (EA)			
	ALL OTHERS (NS)	ALL (NS)			
ASSUMED FRIEND	NO STATEMENT	ALL (NS)	UNKNOWN	ASSUMED FRIEND	NS
	AIRCRAFT CARRIER (CV)		UNKNOWN	ASSUMED FRIEND	AIRCRAFT CARRIER
	CRUISER		UNKNOWN	ASSUMED FRIEND	CG/DD
	BATTLESHIP DESTROYER FRIGATE	ALL	UNKNOWN	ASSUMED FRIEND	PB/PG AMPHIBIOUS
	FAST PATROL BOAT	ALL (NS)			
	AMPHIBIOUS	ALL (NS)			
	LHA/LHD AMPHIBIOUS ASSAULT COMMAND SHIP (LCC) LANDING CRAFT (LC) LANDING PLATFORM LANDING SHIP AMPHIBIOUS GENERAL ASSAULT	ALL			
	ALL	AMPHIBIOUS WARFARE			

C-926

APPENDIX C

MIL-STD-6016B

GENERAL NOTE 21.3. SURFACE (MARITIME) IDENTITY TRANSLATION (Sheet 4 of 9)

Link 16			Link 11/11B		
IDENTITY	SURFACE (MARITIME) PLATFORM	SURFACE (MARITIME) PLATFORM ACTIVITY	IDENTITY	PRIMARY IDENTITY AMPLIFICATION	IDENTITY AMPLIFICATION
ASSUMED FRIEND	NON-MILITARY	ALL (NS)	UNKNOWN	ASSUMED FRIEND	NONMIL
	HOSPITAL SHIP SURVEY VESSEL OCEAN RESEARCH FISHING VESSEL MERCHANT VESSEL	ALL			
	ALL	FISHING NONCOMBATANT OPERATIONS			
	SURFACED SUBMARINE	ALL (NS)	UNKNOWN	ASSUMED FRIEND	SURFACED SUBMARINE
	INTELLIGENCE COLLECTOR	ALL (INTELLIGENCE COLLECTING)	UNKNOWN	ASSUMED FRIEND	SIGINT
	ALL	ELECTRONIC WARFARE (EW) INTELLIGENCE COLLECTING ELECTRONIC WARFARE SUPPORT (ES) ELECTRONIC ATTACK (EA)			
	ALL OTHERS (NS)	ALL (NS)	UNKNOWN	ASSUMED FRIEND	NS
SUSPECT	NO STATEMENT	ALL (NS)	UNKNOWN	SUSPECT	NS
	AIRCRAFT CARRIER (CV)	ALL (NS)	UNKNOWN	SUSPECT	AIRCRAFT CARRIER
	CRUISER	ALL (NS)	UNKNOWN	SUSPECT	CG/DD
	BATTLESHIP DESTROYER FRIGATE	ALL			
	FAST PATROL BOAT	ALL (NS)	UNKNOWN	SUSPECT	PB/PG

C-927

APPENDIX C

MIL-STD-6016B

GENERAL NOTE 21.3. SURFACE (MARITIME) IDENTITY TRANSLATION (Sheet 5 of 9)

Link 16			Link 11/11B		
IDENTITY	SURFACE (MARITIME) PLATFORM	SURFACE (MARITIME) PLATFORM ACTIVITY	IDENTITY	PRIMARY IDENTITY AMPLIFICATION	IDENTITY AMPLIFICATION
SUSPECT	AMPHIBIOUS	ALL (NS)	UNKNOWN	SUSPECT	AMPHIBIOUS
	LHA/LHD AMPHIBIOUS ASSAULT COMMAND SHIP (LCC) LANDING CRAFT (LC) LANDING PLATFORM LANDING SHIP AMPHIBIOUS GENERAL ASSAULT	ALL			
	ALL	AMPHIBIOUS WARFARE			
	NON-MILITARY	ALL (NS)	UNKNOWN	SUSPECT	NONMIL
	HOSPITAL SHIP SURVEY VESSEL OCEAN RESEARCH FISHING VESSEL MERCHANT VESSEL	ALL			
	ALL	FISHING NONCOMBATANT OPERATIONS			
	SURFACED SUBMARINE	ALL (NS)	UNKNOWN	SUSPECT	SURFACED SUBMARINE
	INTELLIGENCE COLLECTOR	ALL (INTELLIGENCE COLLECTING)	UNKNOWN	SUSPECT	SIGINT
	ALL	ELECTRONIC WARFARE (EW) INTELLIGENCE COLLECTING ELECTRONIC WARFARE SUPPORT (ES) ELECTRONIC ATTACK (EA)			

C-928

APPENDIX C

MIL-STD-6016B

GENERAL NOTE 21.3. SURFACE (MARITIME) IDENTITY TRANSLATION (Sheet 6 of 9)

Link 16			Link 11/11B		
IDENTITY	SURFACE (MARITIME) PLATFORM	SURFACE (MARITIME) PLATFORM ACTIVITY	IDENTITY	PRIMARY IDENTITY AMPLIFICATION	IDENTITY AMPLIFICATION
SUSPECT	ALL OTHERS (NS)	ALL (NS)	UNKNOWN	SUSPECT	NS
HOSTILE	NO STATEMENT	ALL (NS)	HOSTILE	GENERAL	NS UNDEFINED
	AIRCRAFT CARRIER (CV)	ALL (NS)	HOSTILE	GENERAL	AIRCRAFT CARRIER
	CRUISER	ALL (NS)	HOSTILE	GENERAL	CG/DD
	BATTLESHIP DESTROYER FRIGATE	ALL			
	FAST PATROL BOAT	ALL (NS)	HOSTILE	GENERAL	PB/PG
	AMPHIBIOUS	ALL (NS)	HOSTILE	GENERAL	AMPHIBIOUS
	LHA/LHD AMPHIBIOUS ASSAULT COMMAND SHIP (LCC) LANDING CRAFT (LC) LANDING PLATFORM LANDING SHIP AMPHIBIOUS GENERAL ASSAULT	ALL			
	ALL	AMPHIBIOUS WARFARE			
	NON-MILITARY	ALL (NS)	HOSTILE	GENERAL	NONMIL
	HOSPITAL SHIP SURVEY VESSEL OCEAN RESEARCH FISHING VESSEL MERCHANT VESSEL	ALL			
	ALL	FISHING NONCOMBATANT OPERATIONS			
	SURFACED SUBMARINE	ALL (NS)	HOSTILE	GENERAL	SURFACED SUBMARINE

C-929

APPENDIX C

MIL-STD-6016B

GENERAL NOTE 21.3. SURFACE (MARITIME) IDENTITY TRANSLATION (Sheet 7 of 9)

C-930

Link 16			Link 11/11B		
IDENTITY	SURFACE (MARITIME) PLATFORM	SURFACE (MARITIME) PLATFORM ACTIVITY	IDENTITY	PRIMARY IDENTITY AMPLIFICATION	IDENTITY AMPLIFICATION
HOSTILE	INTELLIGENCE COLLECTOR	ALL (INTELLIGENCE COLLECTING)	HOSTILE	GENERAL	SIGINT
	ALL	ELECTRONIC WARFARE (EW) INTELLIGENCE COLLECTING ELECTRONIC WARFARE SUPPORT (ES) ELECTRONIC ATTACK (EA)			
	ALL OTHERS (NS)	ALL (NS)			
NEUTRAL	ALL (NS)	ALL (NS)	FRIEND	GENERAL	NEUTRAL
FRIEND	NO STATEMENT	NO STATEMENT	FRIEND	GENERAL	NS
	NON-MILITARY	ALL (NS)	FRIEND	GENERAL	NONMIL
	SURVEY VESSEL FISHING VESSEL MERCHANT VESSEL	ALL			
	ALL	FISHING NONCOMBATANT OPERATIONS			
	AUXILIARY SHIP SUPPORT	ALL EXCEPT AMPHIBIOUS WARFARE (NS)	FRIEND	AUXILIARY	NS REPAIR CARGO
	TANKER/OILER	ALL (NS)	FRIEND	AUXILIARY	TANKER
	TROOP SHIP	ALL EXCEPT AMPHIBIOUS WARFARE (NS)	FRIEND	AUXILIARY	TROOP
	HOSPITAL SHIP	ALL (NS)	FRIEND	AUXILIARY	HOSP

APPENDIX C

MIL-STD-6016B

GENERAL NOTE 21.3. SURFACE (MARITIME) IDENTITY TRANSLATION (Sheet 8 of 9)

Link 16			Link 11/11B		
IDENTITY	SURFACE (MARITIME) PLATFORM	SURFACE (MARITIME) PLATFORM ACTIVITY	IDENTITY	PRIMARY IDENTITY AMPLIFICATION	IDENTITY AMPLIFICATION
FRIEND	NO STATEMENT	SPECIAL WARFARE	FRIEND	SPECIAL MISSION	NS
	MISSILE CONTROL UNIT	ALL			
	FAST PATROL BOAT	ALL (NS)	FRIEND	SPECIAL MISSION	PB/PG
	MINE WARFARE SHIP	MINELAYING MINE WARFARE	FRIEND	SPECIAL MISSION	MINELAYER
	OCEAN RESEARCH	ALL (NS)	FRIEND	SPECIAL MISSION	OCEAN RESEARCH
	INTELLIGENCE COLLECTOR	ALL (INTELLIGENCE COLLECTING)	FRIEND	SPECIAL MISSION	SIGINT
	ALL	ELECTRONIC WARFARE (EW) INTELLIGENCE COLLECTING ELECTRONIC WARFARE SUPPORT (ES) ELECTRONIC ATTACK (EA)			
	AIR CUSHION VEHICLE	ALL (NS)			
	HYDROFOIL	ALL	FRIEND	SPECIAL MISSION	ACV/HYDRO
	SURFACED SUBMARINE	ALL (NS)	FRIEND	SPECIAL MISSION	SURFACED SUBMARINE
	MINE WARFARE SHIP	MINE COUNTERMEASURES	FRIEND	SPECIAL MISSION	MINESWEEPER
	MINE COUNTERMEASURES MARITIME VESSEL (MCMV)	ALL			
	COMMAND	ALL EXCEPT AMPHIBIOUS WARFARE (NS)	FRIEND	LINE	NS UNDEFINED
	AIRCRAFT CARRIER (CV)	ALL (NS)	FRIEND	LINE	AIRCRAFT CARRIER
	CRUISER	ALL (NS)	FRIEND	LINE	CG
	BATTLESHIP	ALL (NS)	FRIEND	LINE	BB
	DESTROYER	ALL (NS)	FRIEND	LINE	DD

C-931

APPENDIX C

MIL-STD-6016B

GENERAL NOTE 21.3. SURFACE (MARITIME) IDENTITY TRANSLATION (Sheet 9 of 9)

Link 16			Link 11/11B		
IDENTITY	SURFACE (MARITIME) PLATFORM	SURFACE (MARITIME) PLATFORM ACTIVITY	IDENTITY	PRIMARY IDENTITY AMPLIFICATION	IDENTITY AMPLIFICATION
FRIEND	FRIGATE	ALL (NS)	FRIEND	LINE	FF
	PATROL	ALL (NS)	FRIEND	LINE	PATROL CRAFT
	PATROL CRAFT ESCORT	ALL	FRIEND	AMPHIBIOUS	NS
	AMPHIBIOUS	ALL (NS)			
	AMPHIBIOUS GENERAL ASSAULT	ALL			
	LANDING PLATFORM	ALL (NS)	FRIEND	AMPHIBIOUS	LANDING PLATFORM
	LANDING SHIP	ALL (NS)	FRIEND	AMPHIBIOUS	LANDING SHIP
	LANDING CRAFT (LC)	ALL (NS)	FRIEND	AMPHIBIOUS	LANDING CRAFT
	TROOP SHIP	AMPHIBIOUS WARFARE	FRIEND	AMPHIBIOUS	TROOP
	AUXILIARY SHIP SUPPORT	AMPHIBIOUS WARFARE	FRIEND	AMPHIBIOUS	CARGO
	AMPHIBIOUS ASSAULT COMMAND SHIP (LCC)	ALL (AMPHIBIOUS WARFARE)	FRIEND	AMPHIBIOUS	COMMAND
	COMMAND	AMPHIBIOUS WARFARE			
	LHA/LHD	ALL (NS)	FRIEND	AMPHIBIOUS	LHA/LHD
	ALL OTHERS (NS)	ALL (NS)	FRIEND	GENERAL	NS

C-932

APPENDIX C

MIL-STD-6016B

MIL-STD-6016B

APPENDIX D

SYSTEM IMPLEMENTATION

D.1 SCOPE

Appendix D and the classified supplements of Appendix D describe the Link 16 implementation of each system participating in the Link 16 joint interface. It shows the implementation from the function level down to the data item level. A description of the system function listing and data item implementation report is provided in paragraph D.4.1. Systems having implementation data for Link 16 in the TADIL Development System (TDS) are identified in Table D-1.

The Link 16 system implementation codes at each implementation level are defined in paragraph D.5.1. The hierarchical dependency of the implementation codes at each level is shown in paragraph D.5.2. The TDS contains the implementation data (for the Appendix D Classified Supplements) in automated format as reported by the services and agencies. Each service or agency has a separate part of the classified supplement showing the implementation of each of their Link 16 systems.

D.2 APPLICABLE DOCUMENTS

The documents listed in section 2 of this standard are applicable to this appendix.

D.3 DEFINITIONS

The definitions in section 3 of this standard apply to this appendix.

D.4 GENERAL REQUIREMENTS

D.4.1 DESCRIPTION

Link 16 System Implementation data contained in the MIL-STD-6016 Appendix D Classified Supplement are displayed using the System Function Listing and the Data Item Implementation Report. These two formats are shown in Figures D-1 and D-2, respectively. Both reports are available on the DISA/IN5 TDS

APPENDIX D

through the Report Generation function. The System Function Listing displays the declared functions of each system (Link 16 technical functions and additional functions upon which the Minimum Implementation (MIN IMP) requirements are based). The Data Item Implementation Report displays system implementation data for all messages or a user specified set of messages or words. In addition, the user may specify a report at the message, word, DFI/DUI, or data item level.

In addition to the System Function Listing and Data Item Implementation Report, two additional reports are available from the TDS, the System Implementation Difference Report and the Minimum Implementation Comparison Report. The System Implementation Difference Report compares the implementations of up to four systems. It determines system interoperability by comparing the transmit code implementation of a target system to the receive code implementation of up to three other systems; it also compares the receive code implementation of the target system to the transmit code implementations of the other systems. A difference indicator prints whenever the implementation codes of the target system are not interoperable with the other systems. The user may select a report at the message, word, DFI/DUI, or data item level, for all or a specified set of messages and words.

The Minimum Implementation Comparison Report allows the comparison of the implementation codes of a selected system to the required implementation codes of the MIN IMP database (based on the MIL-STD-6016, Appendix A). A difference indicator prints whenever the transmit and/or receive implementation codes of the selected system do not meet MIN IMP requirements. This report is available for the message, word, or DFI/DUI levels, for all or a user specified set of messages.

D.4.1.1 SYSTEM FUNCTION LISTING

The format of the functions as implemented by each system is shown in Figure D-1. The System Function Listing appears before the Data Item Implementation Report for the same systems.

The System Function Listing displays the implementation of specific functions by systems as reported by the cognizant service or agency. The list of

APPENDIX D

functions is derived from the MIL-STD-6016 Appendix A - Minimum Implementation, and consists of functions which affect minimum implementation requirements for systems. These functions include JTIDS/MIDS technical functions, functions addressed by the numerical notations within the Appendix A tables, and other functions in Appendix A which affect system minimum implementation requirements. On the TDS, the primary purpose of these functions is to allow the generation of the Minimum Implementation Difference Report (described in Paragraph D.4-1).

CLASSIFICATION

DATA ITEM IMPLEMENTATION REPORT

FUNCTION NAME	(2)	XXX SYS NO 1 XX	XXX SYS NO 2 XX	XXX SYS NO 3 XX	XXX SYS NO 4 XX
01 FUNCTION NAME NUMBER 1 (1)		X (3)			
02 FUNCTION NAME NUMBER 2		X	X		
03 FUNCTION NAME NUMBER 3		X	X	X	
04 FUNCTION NAME NUMBER 4		X	X	X	X
05 FUNCTION NAME NUMBER 5					
06 FUNCTION NAME NUMBER 6		X			
07 FUNCTION NAME NUMBER 7					
08 FUNCTION NAME NUMBER 8					
09 FUNCTION NAME NUMBER 9					
10 FUNCTION NAME NUMBER 10					
11 FUNCTION NAME NUMBER 11					
12 FUNCTION NAME NUMBER 12					
13 FUNCTION NAME NUMBER 13					
14 FUNCTION NAME NUMBER 14					
15 FUNCTION NAME NUMBER 15					
16 FUNCTION NAME NUMBER 16					
17 FUNCTION NAME NUMBER 17		X	X	X	X
18 FUNCTION NAME NUMBER 18					
19 FUNCTION NAME NUMBER 19					
20 FUNCTION NAME NUMBER 20					

LEGEND: (X) = NOTE NUMBERS

PAGE NNNN
CLASSIFICATION

Figure D-1. System Function Listing

APPENDIX D

The note numbers following are keyed to the corresponding BOLD numbers in Figure D-1.

<u>Note Number</u>	<u>Notes</u>
(1)	The function which the system may implement. All functions available for implementation are listed.
(2)	The name of the system for which the functions may be implemented. Up to four systems may be listed on a page.
(3)	The "X" indicates the system performs the corresponding function.

D.4.1.2 DATA ITEM IMPLEMENTATION REPORT

The format of implementation data from the message level to the DI level for each system is shown in Figure D-2.

CLASSIFICATION
DATA ITEM IMPLEMENTATION REPORT

MSG/WORD	MSG/WORD NAME	(1) SYSTEM 1	(1) SYSTEM 2
DFI/DUI NO.	DUI NAME		
DI BIT CODE	DI NAME		
J0.0 (2)	(2) MESSAGE NAME XXXXXXXXXXXXX	T/R/N	T/R
(3) J0.0X	WORD NAME XXXXXXXXXXXXXXXXX	T/R	NT/NP
111/001	DUI NAME XXXXXXXXXXXXXXXXX	T/R	NT/NP
0	DI NAME 1 XXXXXXXXX	T/R	T/R
1	DI NAME 2 XXXXXXXXX	T/R	T/R
2	DI NAME 3 XXXXXXXXX	NT/NP	NT/NR
3	DI NAME 4 XXXXXXXXX	NT/NP	NT/NR
4	DI NAME 5 XXXXXXXXX	T/R	T/R
5	DI NAME 6 XXXXXXXXX	NT/NP	T/R
6	DI NAME 7 XXXXXXXXX	NT/NP	NT/NR
7	DI NAME 8 XXXXXXXXX	NT/NP	NT/NR

(9)
MESSAGE - J0.0
WORD - J0.0X
DFI/DUI - 111/001

(10)
MESSAGE - J0.0
WORD - J0.0X
DFI/DUI - 111/001

LEGEND: (X) = NOTE NUMBERS

Figure D-2. Data Item Implementation Report

CLASSIFICATION

DATA ITEM IMPLEMENTATION REPORT
(J0.0/J0.0X CONTINUED)

MSG/WORD DFI/DUI NO. DI BIT CODE	MSG/WORD NAME DUI NAME DI NAME	SYSTEM 1	SYSTEM 2
DUI ABBREVIATION = 0 (4)			
J0.0X (5)	WORD NAME XXXXXXXXXXXXX	T/R/N	T/R/N
111/002 (6)	DUI NAME 1 XXXXXXXXXX	NT/NP	NT/NP
0 (7)	(7) DI NAME 1 XXXXXXXXXX	NT/NP	T/R
1	DI NAME 2 XXXXXXXXXX	NT/NP	T/R
(8) 111/003	DUI NAME 2 XXXXXXXXXX	NT/NP	NT/NP
0	DI NAME 1 XXXXXXXXXX	NT/NP	T/R
1	DI NAME 2 XXXXXXXXXX	NT/NP	T/R
111/004	DUI NAME 3 XXXXXXXXXX	NT/NP	NT/NP
0	DI NAME 1 XXXXXXXXXX	NT/NP	T/R
1	DI NAME 2 XXXXXXXXXX	NT/NP	T/R
111/005	DUI NAME 4 XXXXXXXXXX	NT/NP	NT/NP
0	DI NAME 1 XXXXXXXXXX	NT/NP	T/R
1	DI NAME 2 XXXXXXXXXX	NT/NP	T/R
111/006	DUI NAME 5 XXXXXXXXXX	NT/NP	NT/NP
0	DI NAME 1 XXXXXXXXXX	NT/NP	T/R
1	DI NAME 2 XXXXXXXXXX	NT/NP	T/R

(9)
MESSAGE - J0.0
WORD - J0.0X (DUI ABBREVIATION = 0)
DFI/DUI - 111/002

(10)
MESSAGE - J0.0
WORD - J0.0X
DFI/DUI - 111/006

LEGEND: (X) = NOTE NUMBERS

APPENDIX D

The note numbers following are keyed to the corresponding BOLD numbers in Figure D-2.

<u>Note Number</u>	<u>Notes</u>
(1)	The name of the system for which the functions or capabilities may be implemented. Up to four systems may be listed on a page. The system name corresponds to that on the System Function Listing.
(2)	The message number and name are displayed with the appropriate message implementation codes appearing in the column of the system to which the codes apply. The transmit code appears first followed by a virgule followed by the receive code followed by a virgule followed by the message forwarding code. If a note applies to any of the three codes, it will appear on the line under the applicable code. The number of the note will correspond to a listing of notes located in the beginning of the report.
(3)	If implementation of the word depends on an action value, the word will appear after the message line. Following this word line will be the action DFI/DUI with its DI values on which the word implementation depends. The DFI/DUI line contains the implementation codes for the action DFI/DUI. The transmit code appears first followed by a virgule followed by the receive implementation code. If the DFI/DUI and/or DI implementation is modified by a note, the note number will appear on the line following the one it modifies, under the applicable code. Note numbers range from 1 to a maximum of 999 for each service/agency.
(4)	This is an action value line. If implementation of the word and DFI/DUIs and DIs within the word depend on a DI value of one of the DFI/DUIs within one of the words of the message, the format of the line is the phrase "DUI ABBREVIATION = " followed by the DI value followed by the DFI/DUI upon which the implementation depends.
(5)	This is the word implementation data line. If an action value line is not used, then the word implementation data line follows a message implementation data line. If an action value line is used, this line begins a new page (page N2, Figure D-2). This line contains the implementation codes for the word for each system listed on the page. The transmit implementation code appears first followed by a virgule followed by the receive implementation code. If the implementation is modified by a note, the note number will appear on the next line under the applicable code.
(6)	DFI/DUI implementation data line of the first DFI/DUI appearing in the word (see Note 1) with the DFI/DUI number, DUI name, and the implementation codes for the DFI/DUI for the indicated system. If the implementation is modified by a note, the note bold number will appear in the next line under the applicable code.

APPENDIX D

<u>Note Number</u>	<u>Notes</u>
(7)	The DI implementation line displays the DI value, the DI name, and the implementation codes for the DI for the indicated system. If the implementation is modified by a note, the note number will appear in the next line under the applicable code.
(8)	The DFI/DUI implementation data line appears after the last DI implementation data line of the preceding DFI/DUI in the word.
(9)	Message number, word number, and DFI/DUI number of the first DFI/DUI appearing at the top of the page.
(10)	Message number, word number, and DFI/DUI number of the DFI/DUI appearing at the bottom of the current page.

MIL-STD-6016B

APPENDIX D

D.4.1.3 SYSTEMS

The Link 16 systems listed in Table D-1 have Link 16 implementation data in the TDS.

TABLE D-1. Link 16 Systems with Implementation Data in the TDS

Service/Agency Designation Code	Cognizant Service/Agency	System Name	TDS System Number
A	USA	PATRIOT-1	700
		JTAGS_12-2-0-11	701
		ADSI	702
		Patriot_PDB5	703
		FAAD C2	704
B	USN	E-2C	500
		ACDS BLK 1	577
		F-14_test	578
		F/A-18	579
		CV/LHD ACDS BLK 1	720
		E-2C-J5	721
		F-14D	722
		CG/DDG ACDS BLK 0	723
		CG/DDG-AEGIS M4	724
		CV ACDS BLK 0	725
		AEGIS M5	726
		ADSI	727
C	USAF	E-3 30/35 E11A	740
		F-15 Suite 3M	741
		F-15 Suite 4M	742
		F-15 Suite 4E	743
		F-16 Suite 3M	744
		ABCCC III	745
		MCE	746
		JMI	747
D	USMC	E-8C	749
		TAOC	760
E	NSA	MCE	761
		RJJU Block 6C	780
		MSCSJ_V6_2	781
		RJJU Block 6C Plus	782
		RJJU Block 7	783

APPENDIX D

D.5 DETAILED REQUIREMENTS

D.5.1 SYSTEM IMPLEMENTATION CODES

The definition of the implementation codes used in the MIL-STD-6016, Appendix D Classified Supplement depends upon the level (message, word, DFI/DUI, or DI) of Link 16 implementation within the system.

D.5.1.1 MESSAGE AND WORD LEVEL TRANSMIT CODES

- T - The system will transmit the indicated message or word.
- NT - The system will not originate the indicated message or word, but shall perform required receipt/compliance actions/responses.
- RT - The system will not originate the indicated message or word but shall retransmit it.
- TBD - To be determined.

D.5.1.2 DFI/DUI LEVEL TRANSMIT CODES

- T - The system will transmit the indicated DFI/DUI.
- NT - The system will not originate the indicated DFI/DUI, but shall perform required receipt/compliance actions/responses.
- RT - The system will not originate the indicated DFI/DUI but shall retransmit it.
- Tn - The system will originate only the specified data item value "n" for the DFI/DUI specified.
- T(n.n) - The system will originate all DI values as specified for the same DFI/DUI in the J(n.n) message.
- TBD - To be determined.

APPENDIX D

D.5.1.3 DI LEVEL TRANSMIT CODES

- T - The system will originate the DI value for the DFI/DUI specified.
- NT - The system will not originate the DI value for the DFI/DUI specified, but shall perform required receipt/compliance actions/responses.
- RT - The system will not originate the DI value for the specified DFI/DUI, but shall retransmit it.
- TBD - To be determined.

D.5.1.4 MESSAGE LEVEL RECEIVE CODES

- R - The system will process the indicated message.
- DM - The system will discard the entire message upon receipt, but shall perform required receipt/compliance actions/responses.
- TBD - To be determined.

D.5.1.5 WORD LEVEL RECEIVE CODES

- R - The system will process the indicated word.
- NP - The system will not process the indicated word but shall perform required receipt/compliance actions/responses. (The word level reception code NP is only valid following a message level or action value reception code of DM.)
- DM - The system will discard the entire message upon receipt of the indicated word, but shall perform required receipt/compliance actions/responses.
- DW - The system will discard the entire word upon receipt, but shall perform required receipt/compliance actions/responses.

APPENDIX D

TBD - To be determined.

D.5.1.6 DFI/DUI LEVEL RECEIVE CODES

- R - The system will process the indicated DFI/DUI.
- NP - The system will not process the indicated DFI/DUI but shall perform required receipt/compliance actions/responses.
- DM - The system will discard the entire message upon receipt of the indicated DFI/DUI, but shall perform required receipt/compliance actions/responses.
- DW - The system will discard the entire word upon receipt of the indicated DFI/DUI, but shall perform required receipt/compliance actions/responses.
- Rn - The system will process the indicated DFI/DUI as if specific DI value "n" has been received.
- R(n.n) - The system will process all DI values as specified for the same DFI/DUI in the J(n.n) message.

TBD - To be determined.

D.5.1.7 DI LEVEL RECEIVE CODES

- R - The system will process the indicated DI.
- NP - The system will not process the indicated DI but shall perform required receipt/compliance actions/responses.
- DM - The system will discard the entire message upon receipt of the indicated DI, but shall perform required receipt/compliance actions/responses.

APPENDIX D

DW - The system will discard the entire word upon receipt of the indicated DI, but shall perform required receipt/compliance actions/responses.

Rn - The system shall process the indicated DI as if specific DI value "n" had been received.

TBD - To be determined.

D.5.1.8 DATA FORWARDING CODES

F - The system will forward the indicated message.

N - The system will not forward the indicated message.

D.5.2 HIERARCHICAL DEPENDENCY OF IMPLEMENTATION CODES

A set of rules for the use of Link 16 implementation codes is necessary to ensure a common understanding of how each system implements a specific Link 16 data item. The To Be Determined (TBD) implementation code can be used at any time; it is valid under any other implementation code.

D.5.2.1 MESSAGE LEVEL TRANSMISSION CODE RULES

D.5.2.1.1 MESSAGE LEVEL CODE T

If the message level code is T, the Initial Word level implementation code must be T.

- a. Legal word level transmission codes are T, NT, or RT.
- b. Legal DFI/DUI level and DI level transmission codes include all codes.

APPENDIX D

D.5.2.1.2 MESSAGE LEVEL CODE NT

If the message level code is NT, all included word, DFI/DUI, and DI implementation codes must be NT.

D.5.2.1.3 MESSAGE LEVEL CODE RT

If the message level code is RT, one or more included word level implementations must indicate an implementation code of RT.

- a. Legal word level transmission codes are NT or RT.
- b. Legal DFI/DUI level transmission codes are NT or RT.
- c. Legal DI level transmission codes are NT or RT.

D.5.2.2 WORD LEVEL TRANSMISSION CODE RULES

D.5.2.2.1 WORD LEVEL CODE T

If the word level code is T, one or more included DFI/DUI level implementations must indicate an implementation code of T.

- a. Legal DFI/DUI level transmission codes include all codes, except NT.
- b. Legal DI level transmission codes include all codes.

D.5.2.2.2 WORD LEVEL CODE NT

If the word level code is NT, all included DFI/DUI and DI codes must be NT.

D.5.2.2.3 WORD LEVEL CODE RT

If the word level code is RT, one or more included DFI/DUI level implementations must indicate an implementation code of RT.

APPENDIX D

- a. Legal DFI/DUI level transmission codes are NT or RT.
- b. Legal DI level transmission codes are NT or RT.

D.5.2.3 DFI/DUI LEVEL TRANSMISSION CODE RULES

D.5.2.3.1 DFI/DUI LEVEL CODE T

If the DFI/DUI level code is T, a minimum of two DIs must indicate an implementation code of T. The legal DI level transmission codes are T, NT, or RT.

D.5.2.3.2 DFI/DUI LEVEL CODE NT

If the DFI/DUI level code is NT, all included DI level codes must be NT.

D.5.2.3.3 DFI/DUI LEVEL CODE RT

If the DFI/DUI level code is RT, one or more included DI implementations must indicate an implementation code of RT. The legal DI level transmission codes are NT or RT.

D.5.2.3.4 DFI/DUI LEVEL CODE TN

If the DFI/DUI level code is Tn, one included DI value implementation will be T and that DI value will be "n." The remainder of the included DI level transmission codes will be NT or RT.

D.5.2.3.5 DFI/DUI LEVEL CODE T(N.N)

If the DFI/DUI level code is T(n.n) there is no new listing of DI implementation codes. The DI transmission codes are as they were listed in message "J(n.n)."

APPENDIX D

D.5.2.4 MESSAGE LEVEL RECEPTION CODE RULES

D.5.2.4.1 MESSAGE LEVEL CODE R

If the message level code is R, the Initial Word Level implementation code must be R.

- a. Legal word level reception codes are R, DW, or DM.
- b. Legal DFI/DUI reception codes include all codes.
- c. Legal DI reception codes include all codes.

D.5.2.4.2 MESSAGE LEVEL CODE DM

If the message level code is DM, all included word, DFI/DUI, and DI implementation codes must be NP.

D.5.2.5 WORD LEVEL RECEPTION CODE RULES

D.5.2.5.1 WORD LEVEL CODE R

If the word level code is R, one or more included DFI/DUI implementations must indicate an implementation code of R.

- a. Legal DFI/DUI level reception codes are R, NP, Rn or R (n.n).
- b. Legal DI level reception codes include all codes.

D.5.2.5.2 WORD LEVEL CODE NP

The word level code NP is only valid when the message level or action value reception code is DM. If the word level code is NP, all included DFI/DUI and DI codes must be NP.

APPENDIX D

D.5.2.5.3 WORD LEVEL CODE DM

If the word level code is DM, all included DFI/DUI and DI codes must be NP.

D.5.2.5.4 WORD LEVEL CODE DW

If the word level code is DW, all included DFI/DUI and DI implementation codes must be NP.

D.5.2.6 DFI/DUI LEVEL RECEPTION CODE RULES

D.5.2.6.1 DFI/DUI LEVEL CODE R

If the DFI/DUI level code is R, a minimum of two DIs must indicate an implementation code of R. The legal DI level reception codes include all codes.

D.5.2.6.2 DFI/DUI LEVEL CODE NP

If the DFI/DUI level code is NP, all included DI codes must be NP.

D.5.2.6.3 DFI/DUI LEVEL CODE DM

If the DFI/DUI level code is DM, all included DI codes must be NP.

D.5.2.6.4 DFI/DUI LEVEL CODE DW

If the DFI/DUI level code is DW, all included DI codes must be NP.

D.5.2.6.5 DFI/DUI LEVEL CODE RN

If the DFI/DUI level code is Rn, one included DI value implementation will be R and that DI value will be "n." The remainder of the included DI values must be NP.

APPENDIX D

D.5.2.6.6 DFI/DUI LEVEL CODE R(N.N)

If the DFI/DUI level code is R(n.n), there is no new listing of DI implementation codes. The DI reception codes are as they were listed in message "J(n.n)."

D.5.2.7 ACTION VALUE RULESD.5.2.7.1 ACTION VALUE TRANSMISSION CODE RULES

a. If the action (DI) value implementation code is T, the Initial Word implementation code must be T. The remainder of the words in the message may show an implementation code of T, NT, or RT. The legal transmission codes for all included DFI/DUI and DI level implementations include all codes.

b. If the action (DI) value implementation code is NT, all included word, DFI/DUI, and DI codes must be NT.

c. It is not appropriate to show an action (DI) value implementation as RT.

D.5.2.7.2 ACTION VALUE RECEPTION CODE RULES

a. If the action (DI) value implementation code is R, the Initial Word implementation code must be R. The remainder of the words of the message may show an implementation code of R or DW. The legal reception codes for all included DFI/DUI and DI level implementations include all codes.

b. If the action (DI) value implementation code is NP, all included word, DFI/DUI, and DI codes must be NP.

c. It is not appropriate to show an action (DI) value implementation code of NP or DW.

d. If the action (DI) value implementation code is Rn, the implementation codes of all included word, DFI/DUI, and DI will be as depicted for action value "n."

APPENDIX D

D.5.2.8 FORWARDING CODE RULES

Rules for forwarding of Link 16 messages to JTA0 are considered at the message level only and are based on message reception (see MIL-STD-6016, Appendix C). For this reason Link 16 forwarding is shown only at the message level. An indication that a message is forwarded (F) obligates the system to forward all translatable words, DFI/DUIs, and DIs of that message regardless of system implementation. Any JU qualified as a forwarder must forward every message whose implementation for reception is R. If the message implementation for reception is NP, forwarding requirements are determined based on the Network Participation Group (NPG) on which the message is normally transmitted (see MIL-STD-6016, Section 4, Table 4.2-1) and the participation status of the impacted system on that NPG. The basic rule is that if the system participates on the NPG on which the message is normally transmitted (see MIL-STD-6016, Section 4, Table 4.2-1), the system is obligated to forward the message in accordance with Appendix C requirements.