




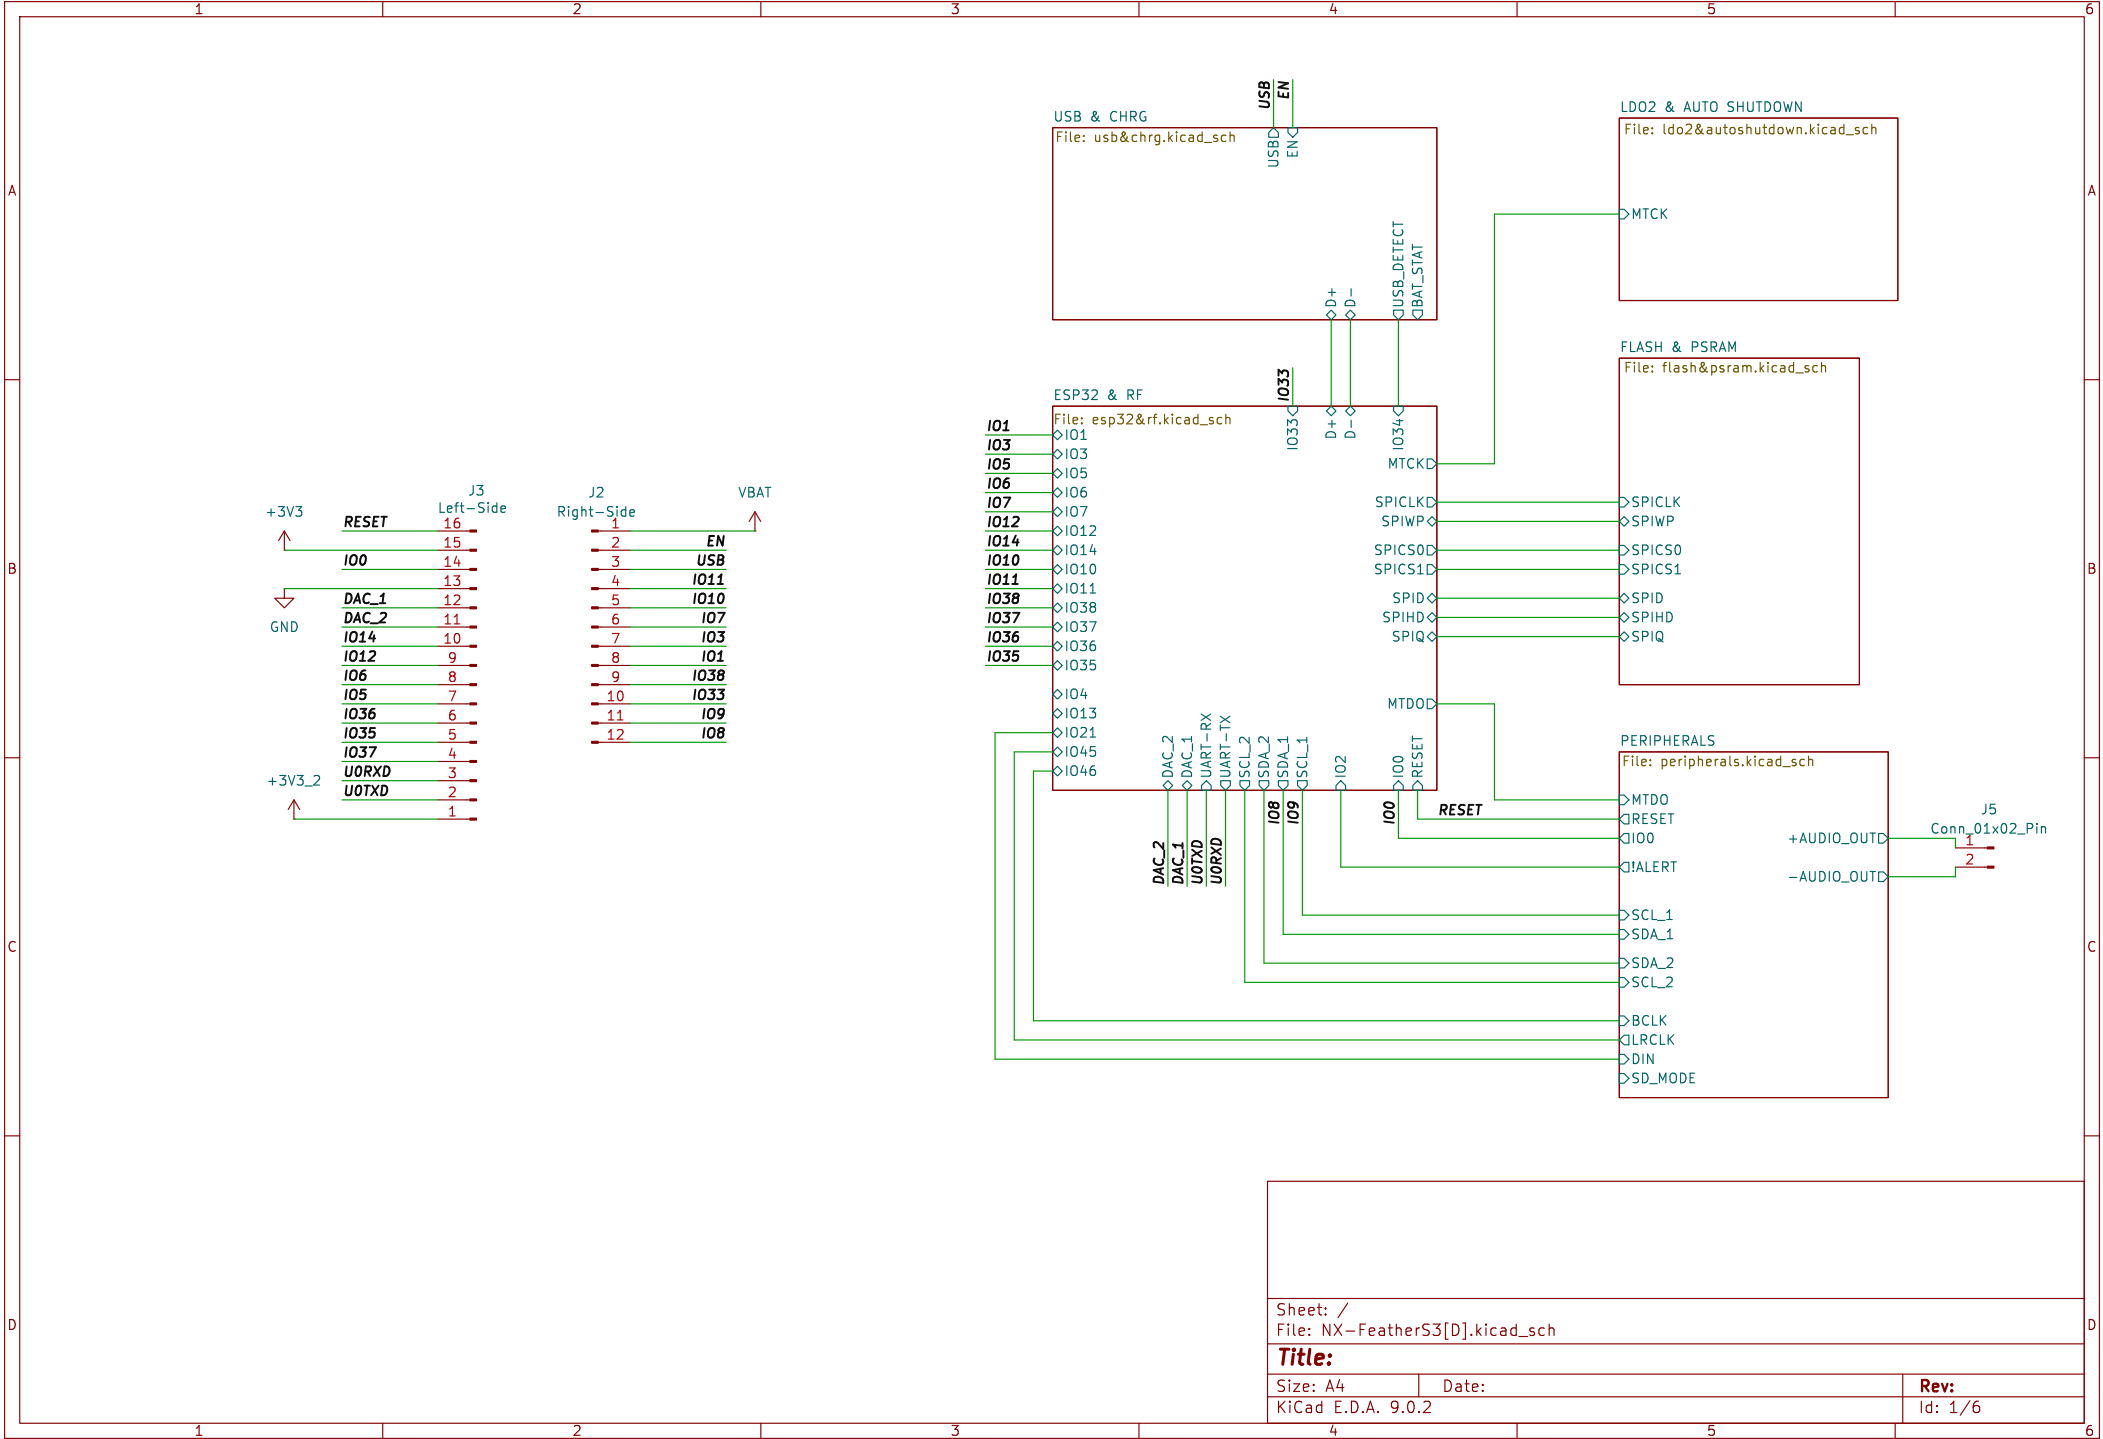

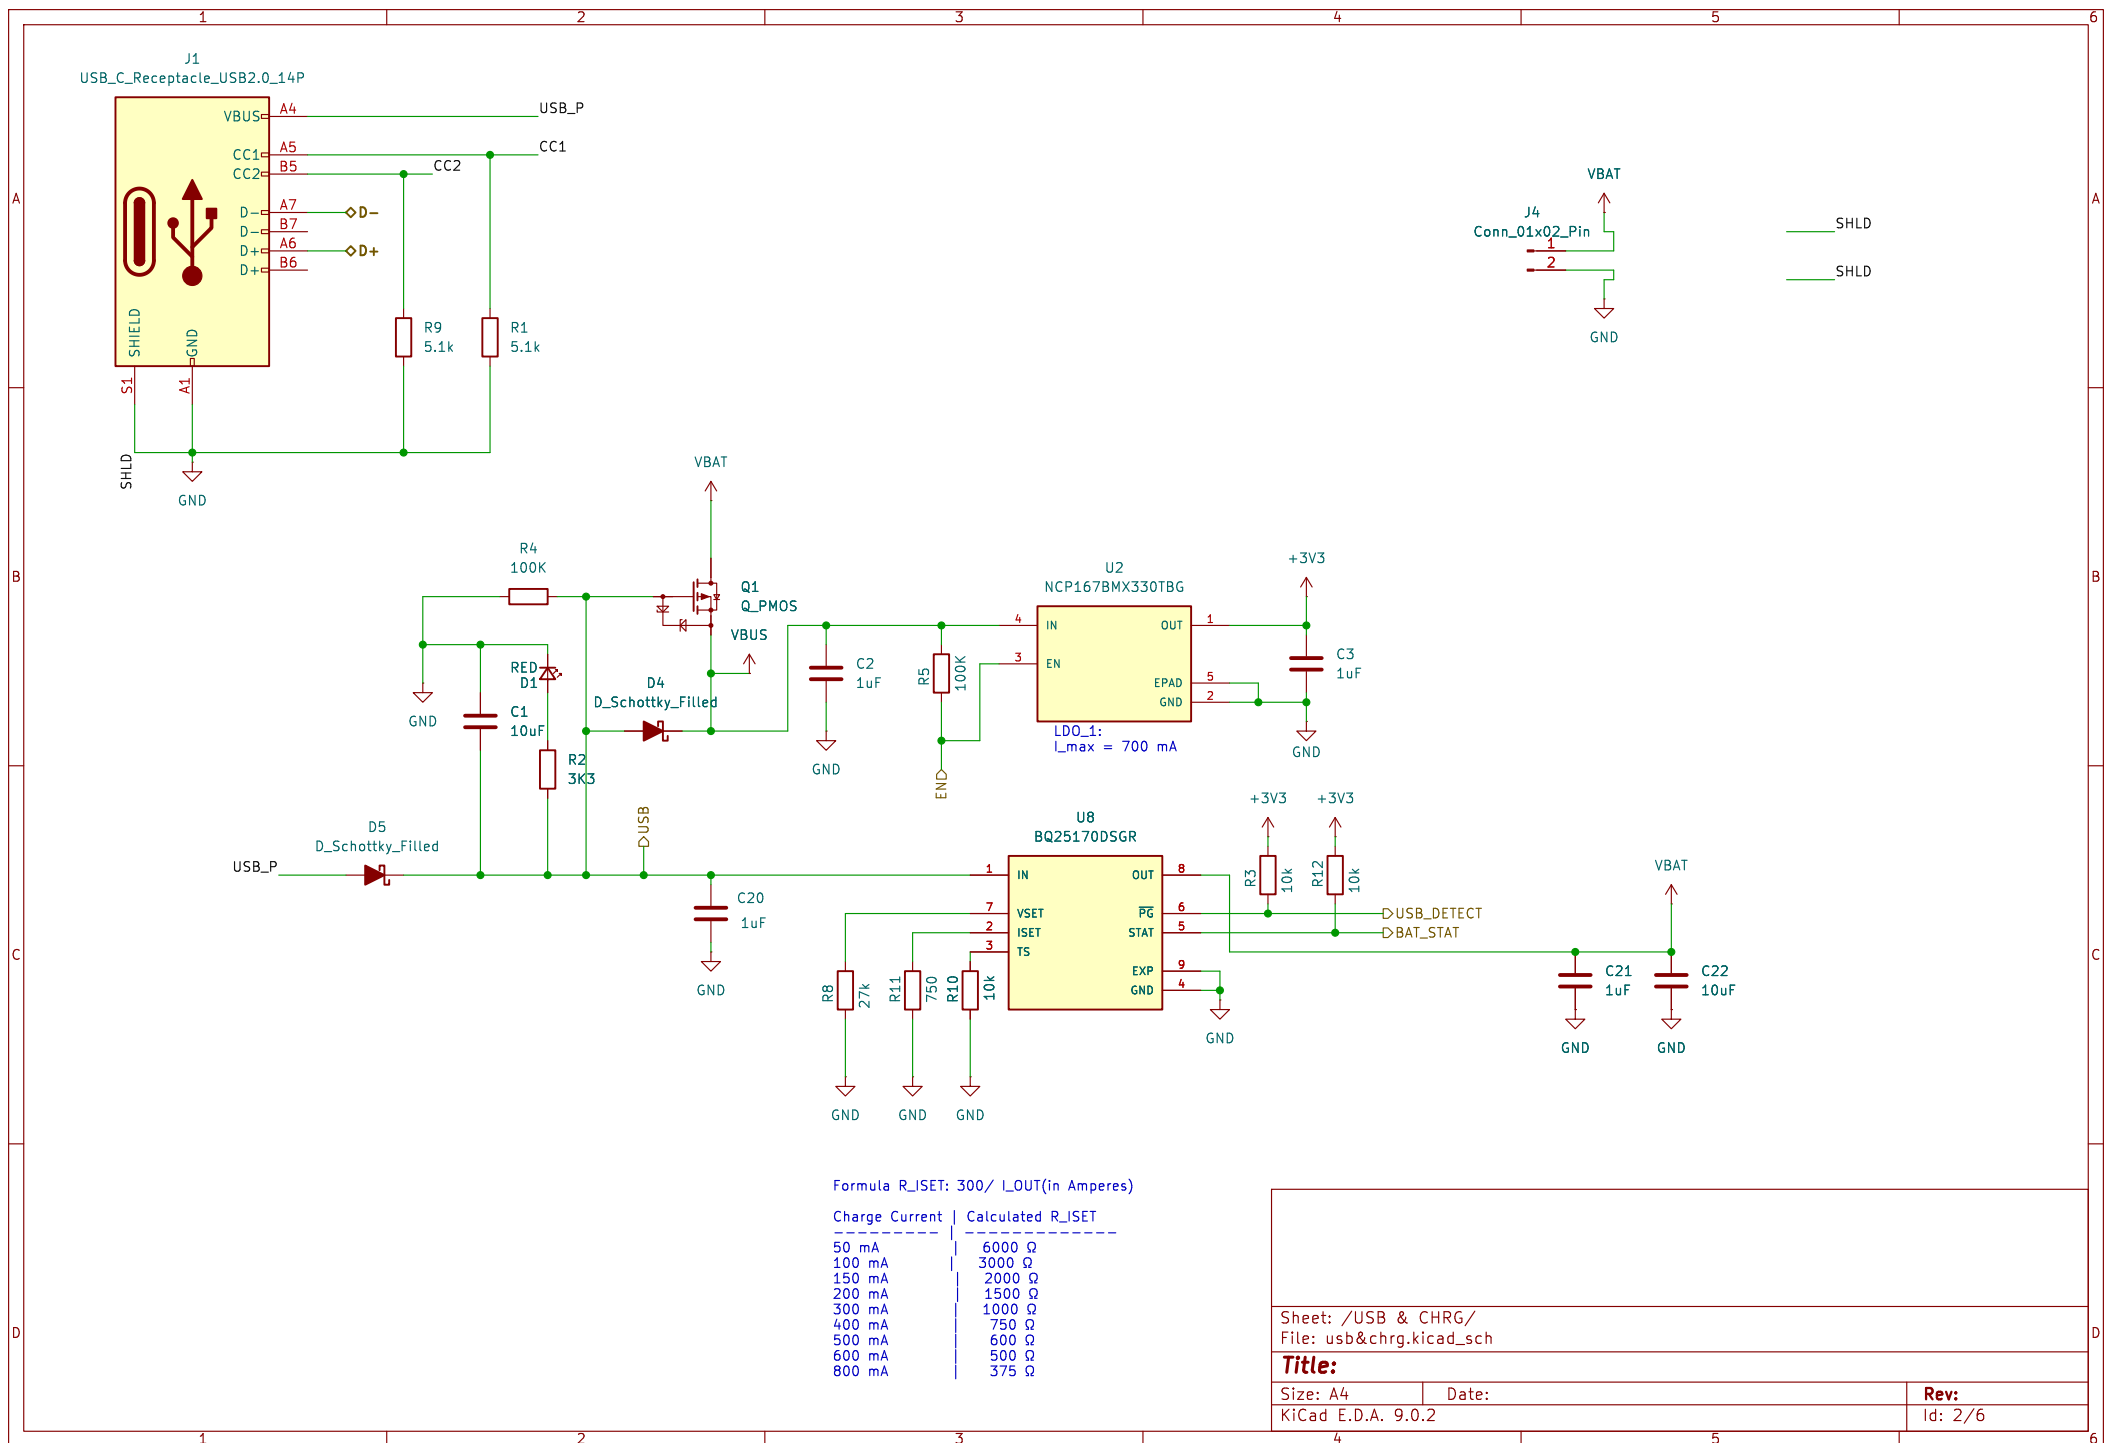

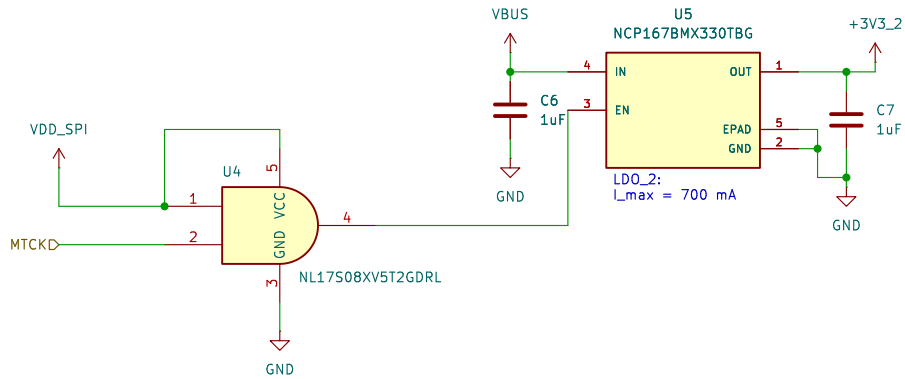

Sheet: /LDO2 & AUTO SHUTDOWN/
File: ldo2&autosshutdown.kicad_sch

Title:



Size: A5

Date:

KiCad E.D.A. 9.0.2

Rev:

Id: 3/6

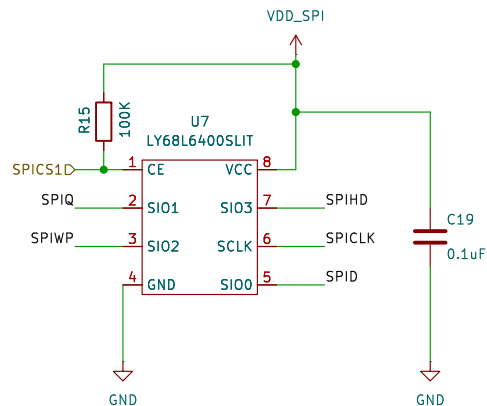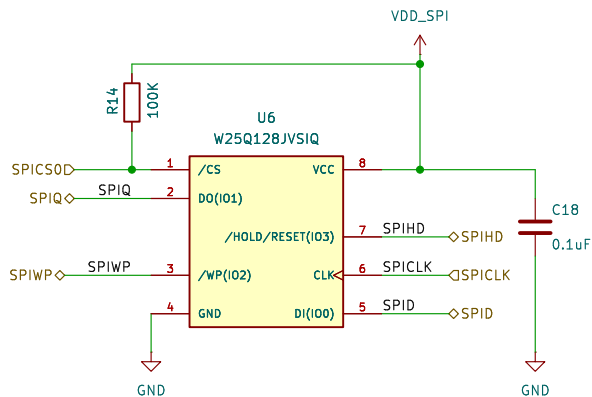

Sheet: /FLASH & PSRAM/
File: flash&psram.kicad_sch


Title:

Size: A5
KiCad E.D.A. 9.0.2


Date:

Rev:
Id: 5/6


Battery Fuel Gauge

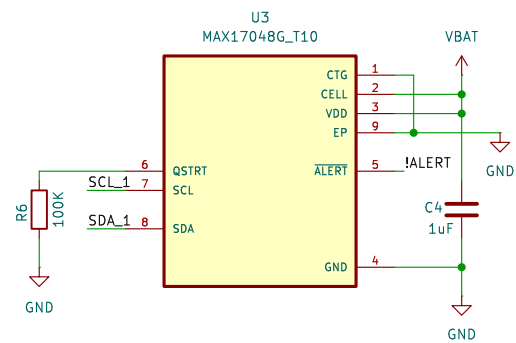

9-DOF

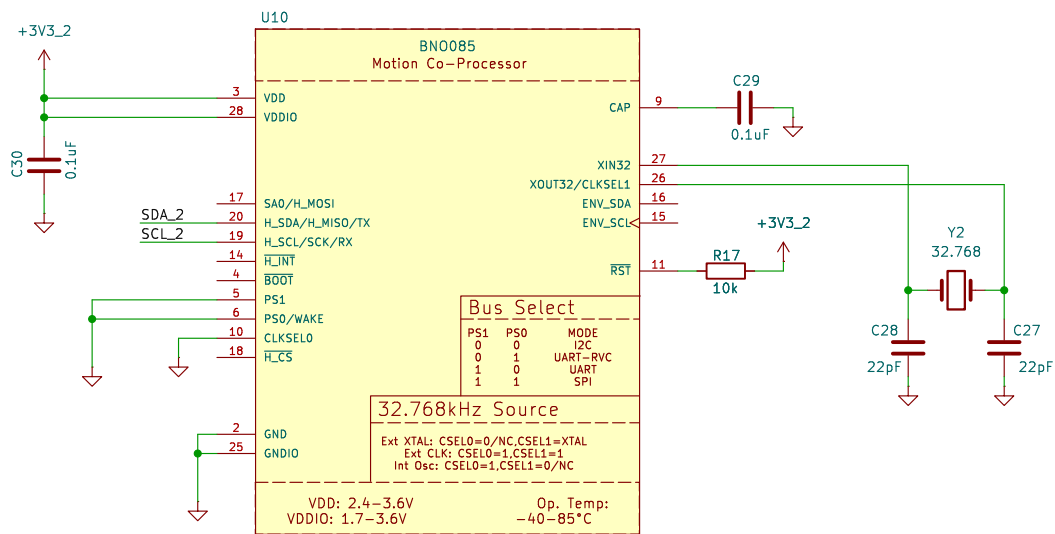


I2S-Amplifier

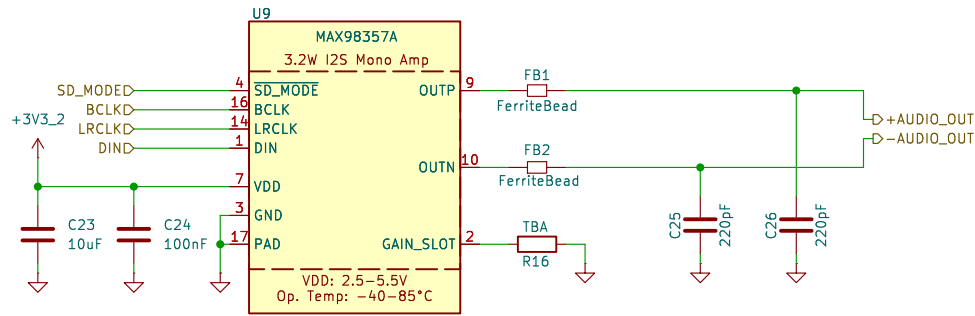


15dB if a 100K resistor is connected between GAIN and GND
12dB if GAIN is connected directly to GND
9dB if GAIN is not connected to anything (this is the default)
6dB if GAIN is connected directly to Vin
3dB if a 100K resistor is connected between GAIN and Vin

NAND-SD


Buttons

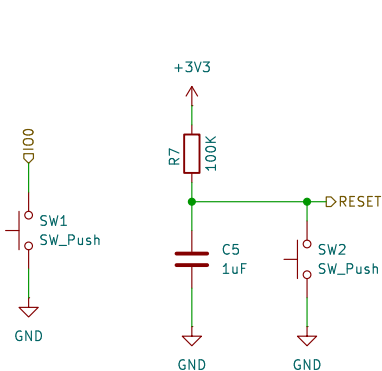

Neopixel LED



Pull-Ups & I2C_1

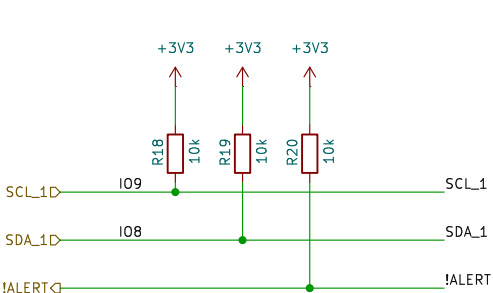

Pull-Ups & I2C_2

