

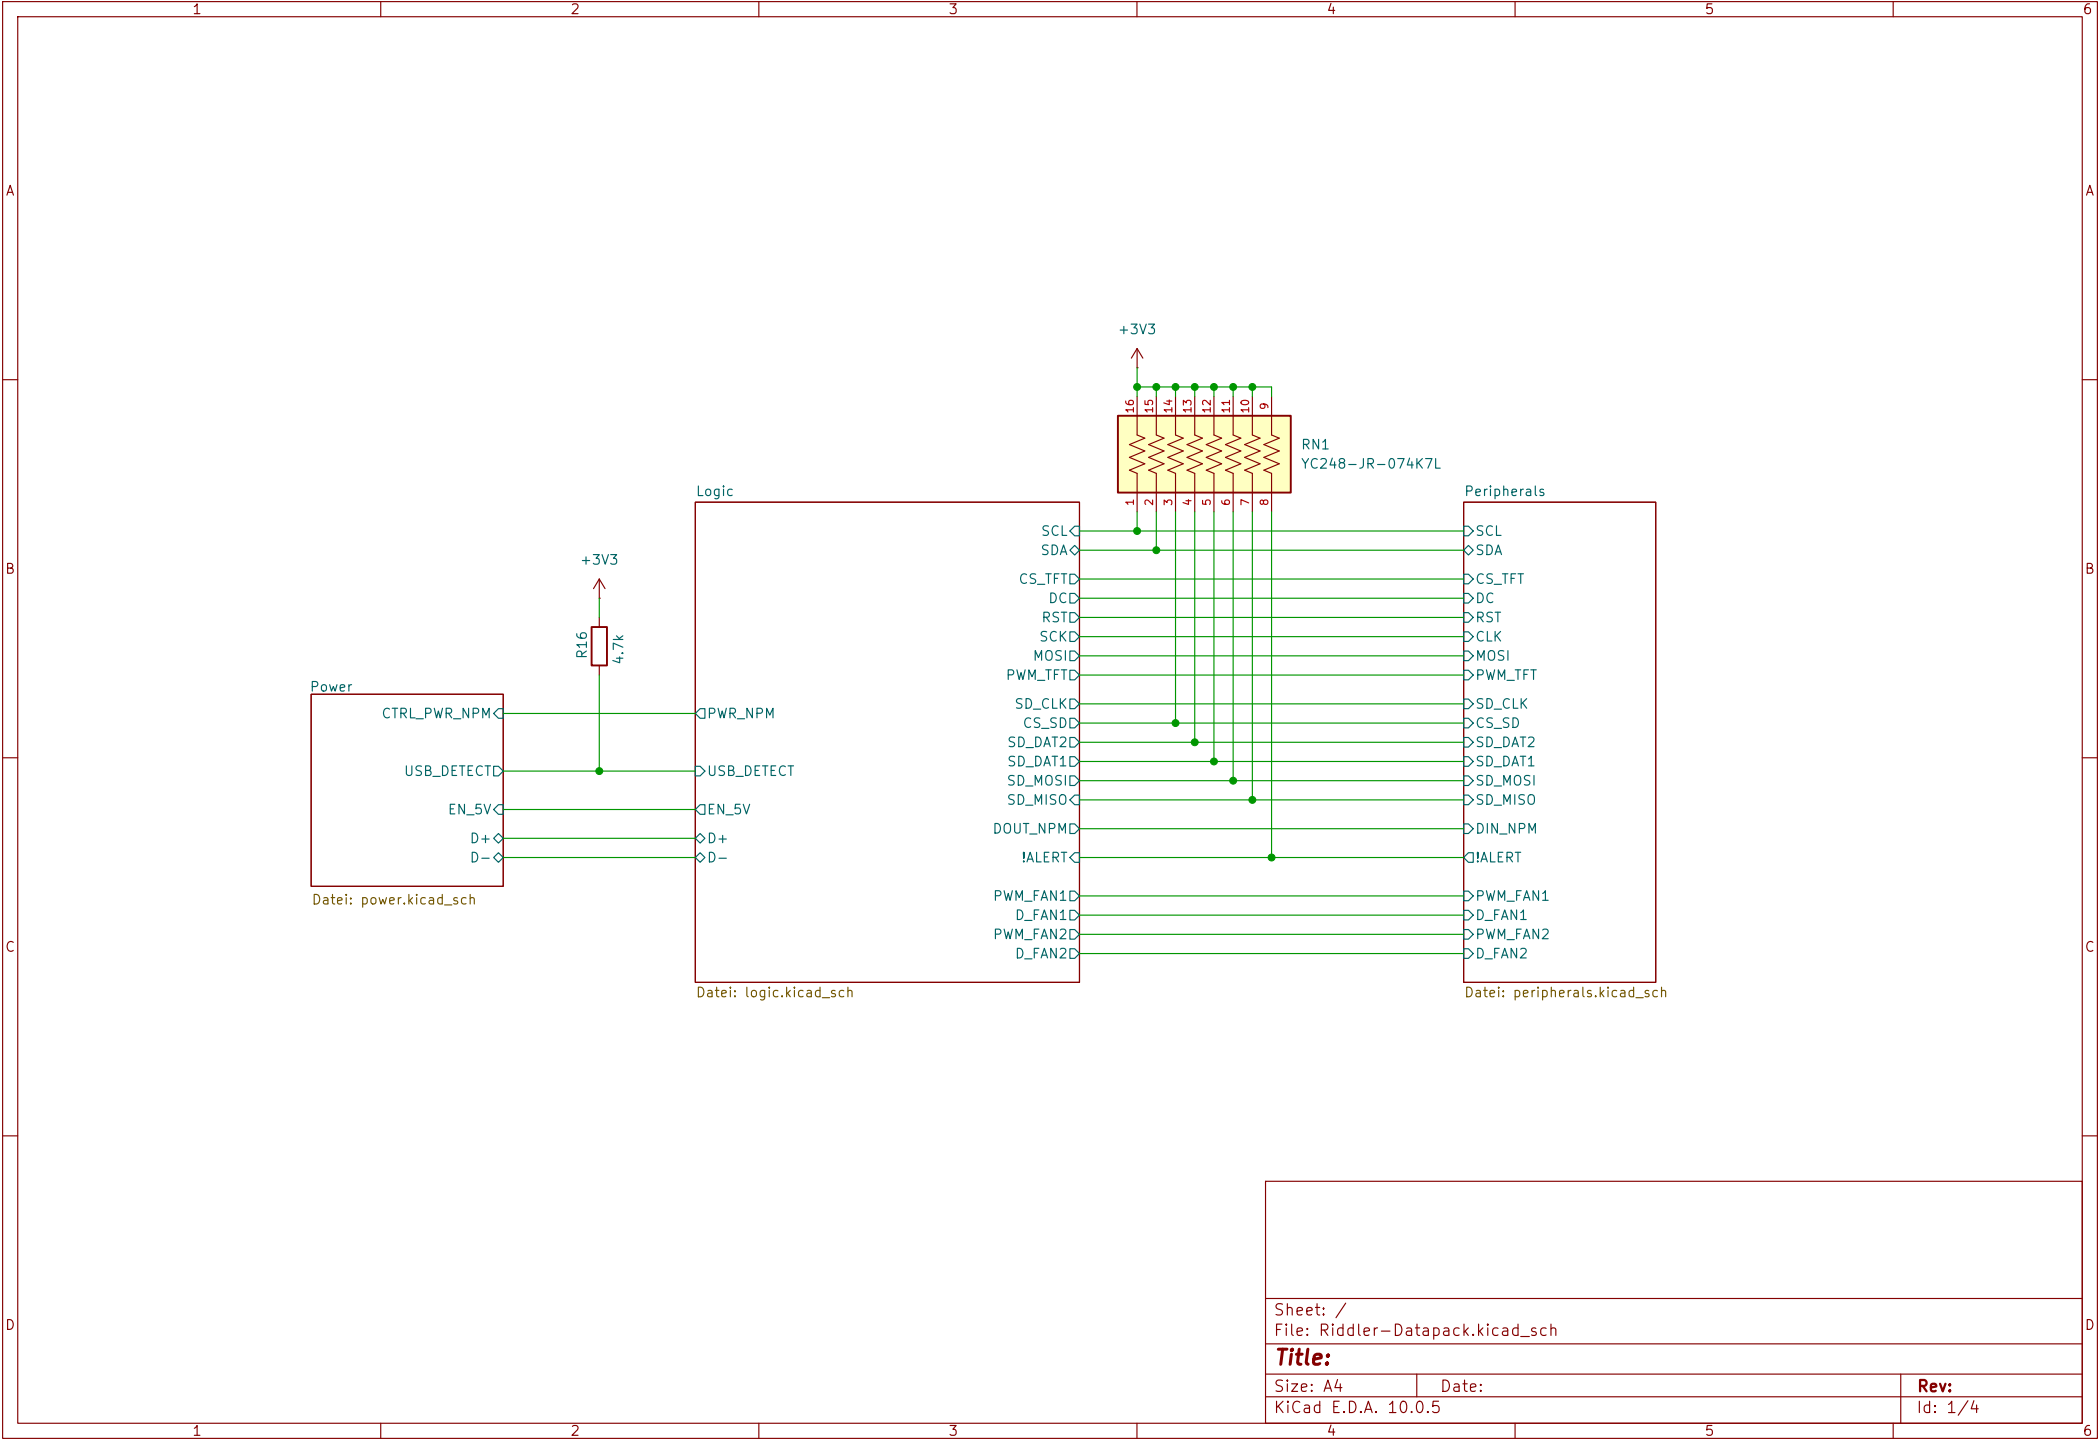
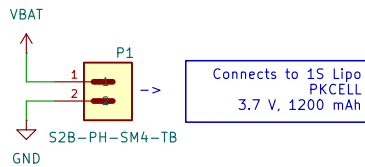





POWER CONNECTORS

J1
UJ20-C-H-G-SMT-1-P16-TR

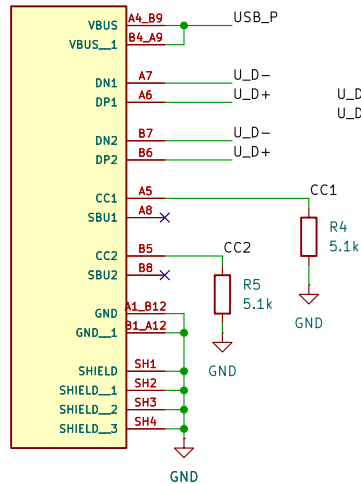

LIPO CHARGER

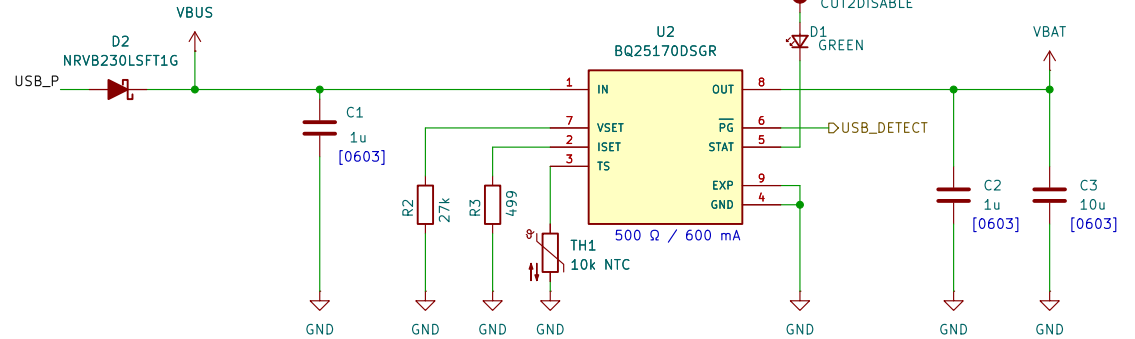


Formula $R_{ISET} = 300 / I_{OUT}(\text{in Amperes})$

Charge Current	Calculated R_{ISET}
50 mA	6000 Ω
100 mA	3000 Ω
150 mA	2000 Ω
200 mA	1500 Ω
300 mA	1000 Ω
400 mA	750 Ω
500 mA	600 Ω
600 mA	500 Ω
800 mA	375 Ω

NPM POWER CONTROL

+5V DCDC Buck



DCDC: 5V / 1A

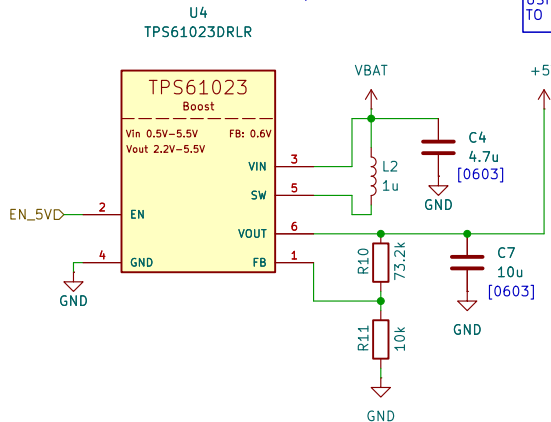

ATTENTION FOR L1 & L2:
I HIGHLY RECOMMEND
USING A SHIELDED COIL
TO REDUCE EMI

+3V3 DCDC Buck

DCDC: 3.3V / 1A

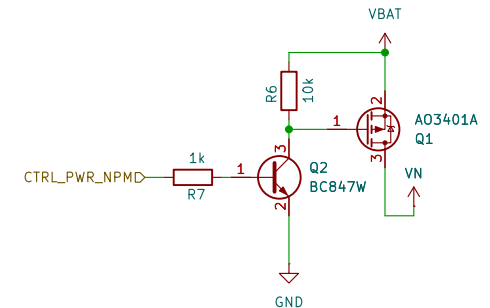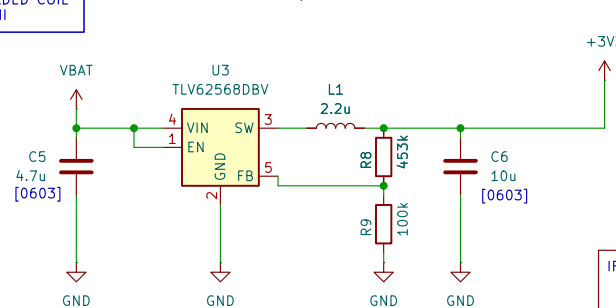

IF NOT SPECIFIED IN [0x0x] THEN ALL PASSIVE PARTS ARE IN: [0402]

Sheet: /Power/
File: power.kicad_sch


Title:

Size: A4
KiCad E.D.A. 10.0.5


Date:

Rev:
Id: 2/4


ESP32-S3 N16R8 U

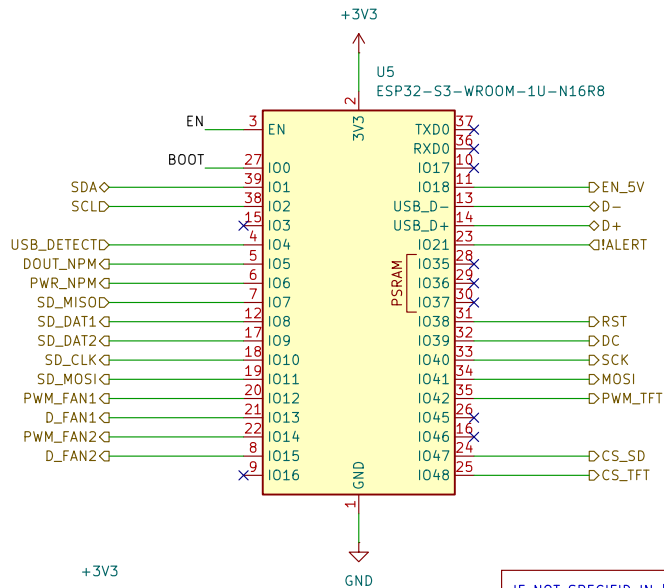

EN & BOOT



ESP32-S3 chip strapping pins:
GPIO 0.
GPIO 3.
GPIO 45.
GPIO 46.



IF NOT SPECIFID IN [0x0x] THEN ALL PASSIVE PARTS ARE IN: [0402]

Sheet: /Logic/
File: logic.kicad_sch

Title:


Size: A5
KiCad E.D.A. 10.0.5

Date:


Rev:

Id: 3/4


SD STORAGE

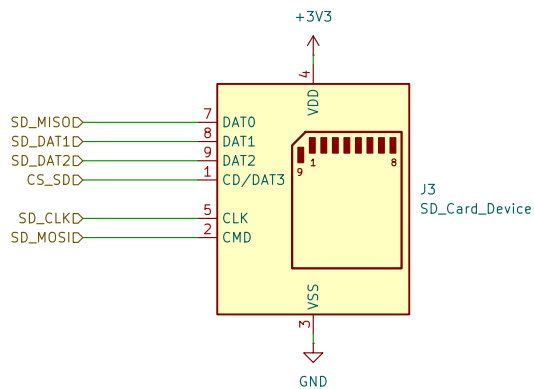


FAN SOCKETS

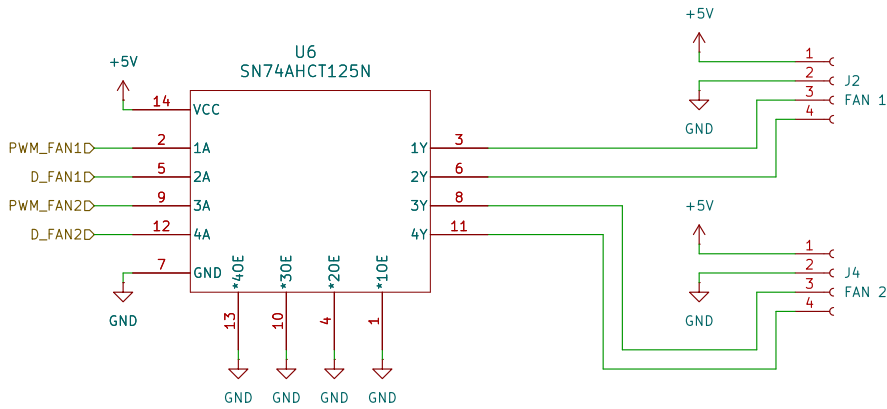

Battery Fuel Gauge

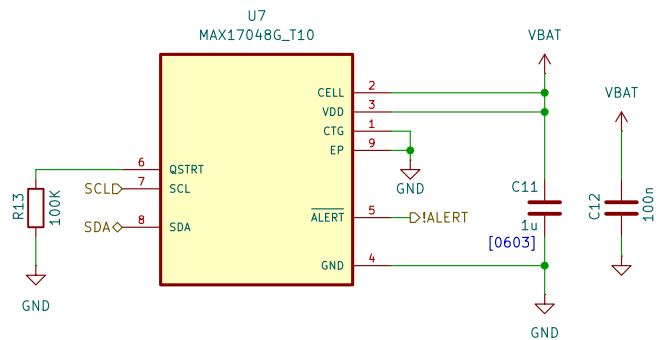

DISPLAY SOCKET



NEOPIXEL STRIPS

