

Test Review – F24 (Wawa) — blank form

Plan · beam spans 48' ÷ 3 = 16' between columns

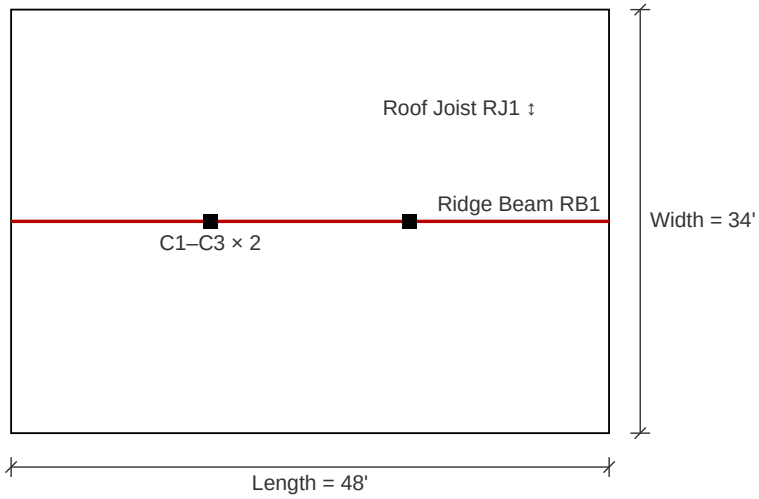

Section through the main house (at the columns)

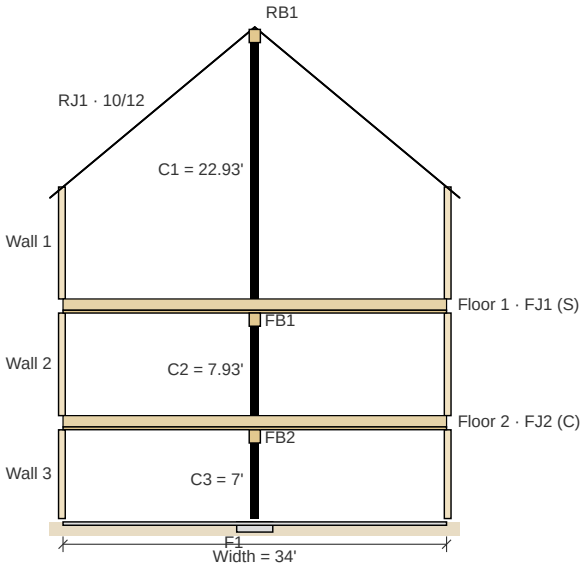

Location

City	**Wawa**

Roof 1

Pitch	**10**	/12
Overhang	**14**	inches
Dead load	**15**	psf
Number of interior columns	**2**	
RB1: Simple or continuous	**C**	S or C

Floor 1

Live Load	**40**	psf
Dead Load	**15**	psf
Joists: Simple or continuous	**S**	S or C
Directly applied ceiling	**Y**	Y or N
Beam: Simple or continuous	**C**	S or C

Floor 2

Live Load	**40**	psf
Dead Load	**25**	psf
Joists: Simple or continuous	**C**	S or C
Directly applied ceiling	**N**	Y or N
Beam: Simple or continuous	**C**	S or C

General Information

Width	**34**	feet
Length	**48**	feet
Wall 1 height		inches
Wall 2 height		inches
Wall 3 height		inches
Subfloor thickness	**0.750**	inches
Soil capacity	**110**	KPa

Assumptions: 1. Walls have 0" width. 2. All beams and columns are weightless. 3. Footings sized on Total Factored Loads. Column heights are given on the form.

Test Review – F24 (Wawa) — blank form

Snow Loading

Ground snow load S_s		kPa
Associated rain load S_r		kPa
Specified snow load		kPa
Specified snow load		psf

Roof Joists RJ1

Unfactored snow load		psf
Unfactored dead load		psf
Pitch		/12
Maximum span		feet
Overhang		inches
Joist depth		inches
Joist type		
Spacing		inches
Slope length		inches
D factor		inches
Length to order		feet

Floor Joist FJ1

Unfactored live load		psf
Unfactored dead load		psf
Subfloor thickness		inches
Directly applied ceiling		Y or N
Simple or continuous span		S or C
Span		feet
Joist depth		inches
Joist type		
Spacing		inches
Length to order		feet

Floor Joist FJ2

Unfactored live load		psf
Unfactored dead load		psf
Subfloor thickness		inches
Directly applied ceiling		Y or N
Simple or continuous span		S or C
Span		feet
Joist depth		inches
Joist type		
Spacing		inches
Length to order		feet

Ridge Beam RB1

Span		feet
Tributary width		feet
Unfactored snow load		plf
Unfactored dead load		plf
Unfactored total load		plf
Total factored load		plf
Beam choice		
Beam height		inches
Bearing requirements		inches

Floor Beam FB1

Span		feet
Tributary width		feet
FJ1: Simple or continuous		S or C
Multiplier for S or C span		
Unfactored live load		plf
Unfactored dead load		plf
Unfactored total load		plf
Total factored load		plf
Beam choice		
Beam height		inches
Bearing requirements		inches

Floor Beam FB2

Span		feet
Tributary width		feet
FJ2: Simple or continuous		S or C
Multiplier for S or C span		
Unfactored live load		plf
Unfactored dead load		plf
Unfactored total load		plf
Total factored load		plf
Beam choice		
Beam height		inches
Bearing requirements		inches

Interior Column C1

RB1: Simple or continuous		S or C
Multiplier for S or C span		
Total factored load		pounds
Column height		feet
Column choice		

Interior Column C2

FB1: Simple or continuous		S or C
Multiplier for S or C span		
Total factored load		pounds
Column height		feet
Column choice		

Interior Column C3

FB2: Simple or continuous		S or C
Multiplier for S or C span		
Total factored load		pounds
Column height		feet
Column choice		

Column Footing F1

Total factored load on C3		pou
Soil capacity		KP
Soil capacity		psf
Footing area		squ
Length of square footing		inc
Smallest dimension of column		inc
Thickness of square footing		inc