

An innovative seeding technique for photon conversion reconstruction at CMS

¹D Giordano and ²G Sguazzoni

¹CERN, Information Technology Department, Experiment Support Group, Geneva, Switzerland

²INFN, Firenze, Italy

E-mail: domenico.giordano@cern.ch, giacomo.sguazzoni@cern.ch

Abstract. The conversion of photons into electron-positron pairs in the detector material is a nuisance in the event reconstruction of high energy physics experiments, since the measurement of the electromagnetic component of interaction products results degraded. Nonetheless this unavoidable detector effect can be also extremely useful. The reconstruction of photon conversions can be used to probe the detector material and to accurately measure soft photons that come from radiative decays in heavy flavor physics. In fact a converted photon can be measured with very high momentum resolution by exploiting the excellent reconstruction of charged tracks of a tracking detector as the one of CMS at LHC. The main issue is that photon conversion tracks are difficult to reconstruct for standard reconstruction algorithms. They are typically soft and very displaced from primary interaction vertex. An innovative seeding technique that exploits the peculiar photon conversion topology, successfully applied in the CMS track reconstruction sequence, is presented. The performances of this technique and the substantial enhancement of photon conversion reconstruction efficiency are discussed. Application examples are given.

1. Introduction

The precise and efficient determination of charged-particle momenta is a critical component of the physics program of the LHC experiments, as it impacts the ability to reconstruct leptons, charged hadrons and jets which are the basic physics objects needed to study pp collisions. Achieving the necessary momentum resolution requires precise tracking in a high magnetic field. This has been obtained by the two LHC general purpose experiments adopting a design with the inner tracking systems in a solenoidal magnetic field.

What makes track reconstruction difficult is the large number of hits in the tracking detectors produced by the many tracks resulting from several pp interactions in the same bunch crossing. In order to mitigate this issue the hit occupancy is kept low using highly granular sensors and, consequently, a high number of electronic channels (several millions) for their front-end readout at the cost of an increase of material in the tracking volume. These channels need to be powered, controlled, read-out through complex systems of cables and optical fibers. Moreover they have to dissipate a considerable amount of heat, hence a capillary cooling system is also required. The consequent amount of material contained in the detectors and support structures, the associated electronics, and the power-supply and cooling services is not negligible and has effect on the tracking performance because of multiple scattering, energy loss and electron bremsstrahlung.

For this reason the track reconstruction has to properly take into account the amount of material in the tracking volume: amount of material to be known with extreme accuracy. This material affects also the overall event topology and its reconstruction because of photon conversions and nuclear interactions that modify the energy flow through the inner detector.

This unavoidable detector effect can be also turned into an extremely useful tool. For instance the reconstruction of photon conversions can be used to probe the detector material and to accurately measure soft photons produced in radiative decays of heavy flavor particles.

In this paper we will discuss the impact of the photon conversions in the event reconstruction at LHC. We will refer to the CMS detector [1], even if most of the concepts discussed can be applied also to other detectors. In the following sections a description of the CMS detector will be provided as well as some examples of the problems and bonus due to the photon conversions inside the tracking volume. We will summarize the current methods for the reconstruction of photon conversions and describe an innovative additional technique that allows to increase their reconstruction efficiency.

2. The CMS detector

The Compact Muon Solenoid (CMS) features an all-silicon tracker, a lead tungstate crystal electromagnetic calorimeter (ECAL), and a brass-scintillator hadronic calorimeter (HCAL), all contained inside a 3.8 T superconducting solenoid. The strong magnetic field enables the measurement of charged particle momenta over more than four orders of magnitude, from less than 100 MeV/ c to more than 1 TeV/ c , by reconstructing their trajectories as they traverse the CMS inner tracking system. The iron return yoke of the solenoid is interspersed with gas detectors that are used to identify muons.

The CMS Tracker, shown in Fig. 1, consists of 1440 silicon pixel and 15148 silicon strip detector modules, covering the region from 4 cm to 110 cm in radius, and within 280 cm on either side of the collision point along the LHC beam axis. The tracker acceptance extends up to a pseudo-rapidity of $|\eta| < 2.5$. The pseudo-rapidity η is defined as $-\log[\tan(\theta/2)]$, where θ is the polar angle with respect to the direction of the LHC counter-clockwise beam, and ϕ is the azimuthal angle in the plane orthogonal to the beams. The tracker detector provides an impact parameter resolution of $\sim 15\mu\text{m}$ and a transverse momentum (p_T) resolution of about 1.5 % for 100 GeV/ c particles. The calorimeter towers are projective and finely segmented, with $\Delta\phi \sim \Delta\eta \sim 0.087$ in the central region, allowing precise reconstruction of the e/γ position and energy.

Figure 2 shows the material budget of the CMS tracker in units of radiation length (X_0). The overall material crossed by a particle traversing the Tracker volume can exceed 1 X_0 . It increases from 0.4 X_0 at $\eta \sim 0$ to about 1.8 X_0 at $|\eta| \sim 1.4$, beyond which it falls to about 1 X_0 at $|\eta| \sim 2.5$. The largest contribution to the Tracker mass is by far represented by the passive structures having the largest uncertainty on their overall amount and can have a sensible impact on the expected physics performance.

3. Effects of the photon conversions

As a consequence of the amount of material shown in Fig. 2, up to 70% of photons traversing the CMS Tracker material converts into e^+e^- pairs, resulting in a large fraction of secondary electrons. Most of these photons are from $\pi^0 \rightarrow \gamma\gamma$ decays in jets. Other sources are prompt photons and the photon emitted by bremsstrahlung before an electron reaches the electromagnetic calorimeter. These electron pairs are a non-negligible background to prompt electrons from pp collisions and must be rejected efficiently in many physics analyses which signatures contain prompt electrons.

For this purpose CMS has developed several methods to reduce the electron fake rate by vetoing electron candidates that match one of the two tracks of a photon conversion. Some

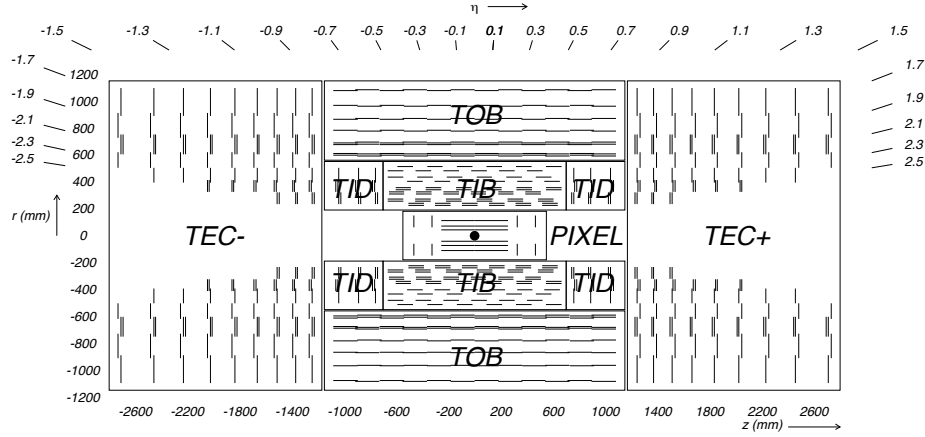


Figure 1. Schematic cross section through the CMS tracker. Each line represents a detector module. Double lines indicate back-to-back modules which deliver stereo hits.

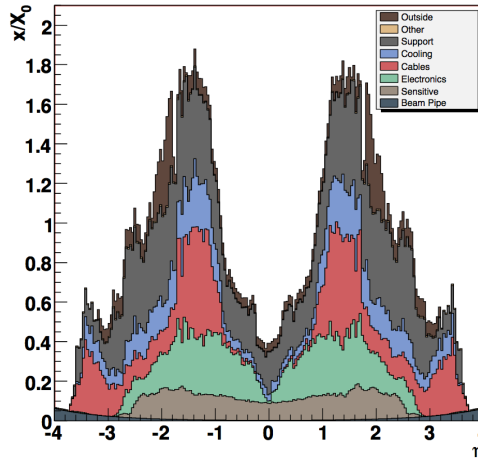


Figure 2. Material budget inside the CMS Tracker volume in units of radiation length as a function of pseudorapidity η broken down into the functional contributions .

methods explicitly identify photon conversions, others use information contained in the electron candidate, such as the hit-pattern to infer from the number of inner missing hits if the track is prompt or not.

Converted photons inside jets can affect the jet energy measurement or the jet misidentification, if not properly reconstructed. For instance, a leading π^0 carrying most of the momentum of the jet can decay in two photons such that one photon exhibit the majority of the π^0 energy. If that photon then converts in the tracker material in an asymmetric fashion, such that an electron carrying most of the photon energy is produced, the electron track will match to the rest of the jet electromagnetic energy deposition, resulting in a misidentification of the genuine jet as an electron. Given the asymmetrical distribution of the energy among the two particles in the e^+e^- pair, the no-leading track can have a very low p_T and/or a very displaced vertex making its reconstruction inefficient. The same challenge subsists for the reconstruction of soft- p_T photon conversions ($\lesssim 3\text{GeV}$) some of which do not even reach the electromagnetic

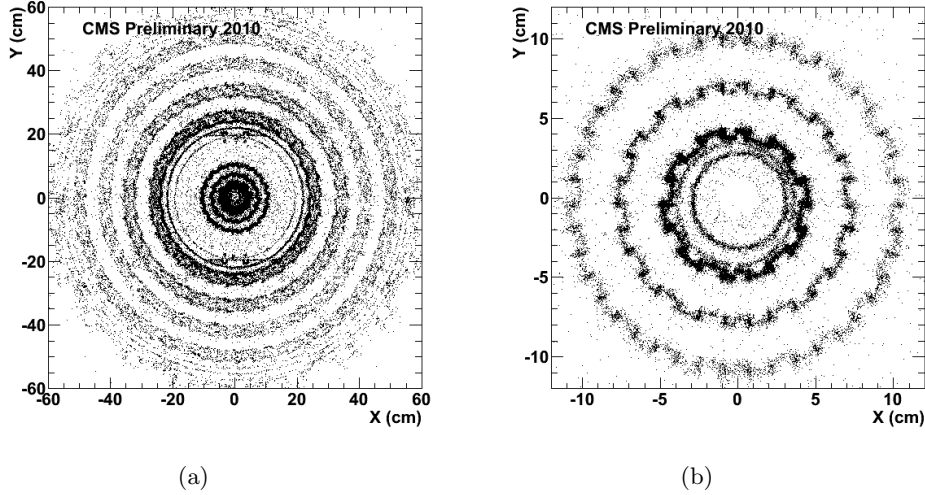


Figure 3. Conversion vertices reconstructed in CMS data in the (x, y) plane for $|z| < 26$ cm; zoom increases from (a) to (b). Results were obtained on a sample corresponding to $1/\text{nb}$ of integrated luminosity where about 260 000 photon conversions were reconstructed.

calorimeter.

Another field of interest is the reconstruction of prompt photons as signature of physics in studies like $H \rightarrow \gamma\gamma$. These photons have in general high- p_T (above $10 \text{ GeV}/c$) and even if undergo conversion can be reconstructed by the electromagnetic calorimeter, as far as both tracks deposit their energy inside the calorimeter. However for many analyses it is essential to be able to reconstruct converted photons through the two produced tracks, to profit of the higher angular resolution of these tracks, in order to better associate the primary vertex from which the original photon belong.

Until here we have described the inconvenient effects of the photon conversions. As anticipated this phenomenon can be reverted in favor of specific and cutting-edge applications, such as the accurate measurement of the material inside the tracker volume, an aspect that is crucial to have a realistic material description in the track reconstruction. Or such as the spectroscopy of excited states of heavy flavor particles decaying radiatively.

A robust method for the material budget estimation, exploited also by many past experiments, is based on photon conversions. Conversion vertices are reconstructed with a typical radial resolution of $\sigma_r = 0.2 \div 0.5$ cm and angular resolution of 1 mrad, primarily as a function of pseudo-rapidity. The idea is that the material radiography, provided by the position of reconstructed photon conversion vertices, allows for the visualisation of detector layers and service structures and that the conversions rate provides an estimate of the amount of material in the detector volume in terms of radiation lengths. In Fig. 3 the position of conversion vertices reconstructed in CMS data is shown in the (x, y) plane: in Fig. 3(a) the structure at the very centre is the Pixel detector, surrounded by the shell and rails supporting the Pixel detector, four layers of the Inner Tracker and the first layer of the Outer Tracker. When restricting the (x, y) view to ± 12 cm, Fig. 3(b), the beam pipe is clearly visible, off-centered with respect to the Pixel detector. The (z, R) view of conversion vertices reconstructed in data is shown in Fig. 4; the less populated areas around $|\eta| \sim 1.2$ corresponds to transition regions between the Tracker barrel and endcap sub-components where the larger amount of passive material and the change in the active material topology makes more difficult the reconstruction of displaced vertexes. The dedicated seeding described in Sec. 5 provides a reasonable increase of efficiency, as it will

be shown later.

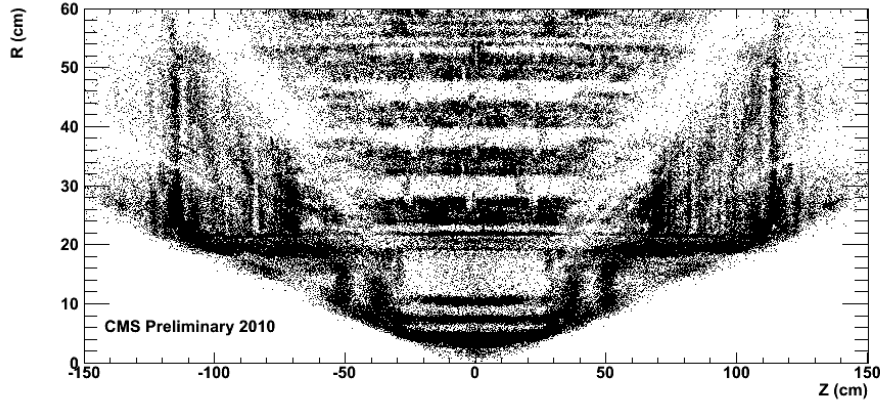


Figure 4. Conversion vertices reconstructed in CMS data in the (z, R) plane.

Another field that takes advantage of the photon conversion reconstruction is the study of heavy quarkonia states. These bound states of charm and bottom quark-antiquark pairs play an important role in the detailed understanding of quantum-chromodynamics (QCD), the theory describing the strong interactions among elementary particles. A quantitative understanding of the mechanisms of quarkonium production can be provided by measurements of the production cross sections and polarizations of P-wave quarkonia, such as the χ_{cJ} and the χ_{bJ} states, especially at the high transverse momentum ranges reachable in high-energy proton colliders. The CMS experiment is well capable of detecting and accurately reconstructing the χ_c (χ_b) states, through their radiative decays to the J/ψ (Υ) state with the low-energy photons being detected through their conversion in electron-positron pairs.

At low energies (rarely above 2.5 GeV in the laboratory), the calorimetric measurements do not have precisions comparable to those obtainable when the photon energy is measured through the tracking of the electron-positron pair originating from a conversion of the photon. Figure 3 shows the invariant mass distribution for χ_c candidates observed through their radiative decay in $J/\psi + \gamma$. The excellent momentum resolution of the reconstructed photon conversions translates in a mass resolution of less than 10 MeV, what is enough to disentangle the states χ_{c1} and χ_{c2} , whose masses differ by only 45 MeV. Furthermore, the converted photons have an accurate assignment of the interaction vertex where they come from, allowing to limit the combinatorial background in the invariant mass spectrum of Fig. 3 rejecting wrong combinations of dimuons plus photons produced in different pp collisions at the same bunch crossing (something especially important in the presence of a large number of pileup collisions).

The drawback of the usage of photon conversions for a physics measurement is the reduced yield caused by the low efficiency of their reconstruction as pairs of low momentum tracks displaced with respect to the beam axis. Typical efficiency is of the order of $0.1 \div 5\%$ for photon $p_T < 5 \text{ GeV}/c$. It is then evident that any new algorithm contributing to increase this efficiency has a direct impact in the physics analyses.

4. Photon Conversion Reconstruction

Reconstruction of converted photons is therefore a crucial step in the physics program of CMS, and algorithms have been developed, which exploit the conversion pair signature to distinguish genuine pairs from fake pairs. Photon conversions are characterized by a pair of oppositely charged secondary tracks, originating from the photon conversion vertex with an invariant

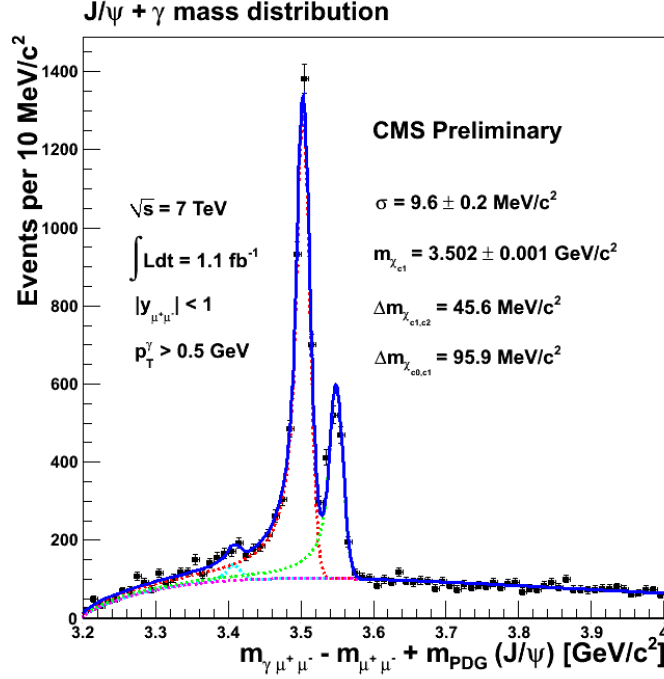


Figure 5. Invariant mass spectrum for χ_c candidates reconstructed through their radiative decay to $J/\psi + \gamma$.

mass consistent with zero, which are therefore parallel to each other at production vertex. The electron-positron pair, then, opens only in the transverse plane because of the solenoidal magnetic field. The general reconstruction approach is to preselect pairs of oppositely charged tracks satisfying the quality and topological criteria of photon conversions and to fit each of these pairs by a 3D-constrained kinematic vertex fitter that imposes the two tracks to be parallel at the vertex.

Two methods are used in CMS to generate the collection of potential conversion tracks: the ECAL-seeded conversion method [?] and the combined conversion method. The former starts from calorimetric clusters and is optimized for very displaced conversion vertexes as well as high- p_T photons ($p_T > 10 \text{ GeV}/c$). To reconstruct photon conversions within a soft- p_T spectrum (such as the majority of the photons from π^0 decays in minimum bias events or from quarkonia excited states) the ECAL cluster-driven track cannot be used, because the electron pairs from conversions are very unlikely to reach the electromagnetic calorimeter. Therefore conversions need to be reconstructed pairing tracks from the CMS general track and electron track (GSF) collections. The general track collection is an inclusive collection of tracks resulting from an iterative procedure [?] to incorporate increasingly displaced and/or low- p_T tracks. The GSF (Gaussian Sum Filter) track collection is specific for electron candidates. It employs a weighted sum of Gaussian components to model the non-Gaussian energy loss distribution for electrons passing through the material. The collection of tracks in the combined conversion method is obtained from a combination of general tracks, conversion ECAL-seeded tracks and GSF tracks.

QUI CI METTIAMO UN CERATI PLOT PER LE TRE COMPONENTI GSF, ECAL, ITERATIVE?

5. Tracking algorithm for photon conversions

The standard CMS tracking is made of consecutive iterative steps designed to obtain high efficiency and low fake rate for tracks coming either from the primary vertex or from displaced decay vertices while maintaining the overall computing time within the requirements of the CMS offline reconstruction. Because of this constraint, the standard implementation is not optimal to reconstruct with high efficiency tracks from photon conversions since the cuts applied in the standard reconstruction are too tight for these processes. Those tracks have usually very low momentum and, especially for displaced vertices at large radii, they have a large transverse impact parameter.

Beside the soft- p_T spectrum of the majority of the photons produced at LHC, another reason why the conversion tracks have low momentum is the asymmetric distribution of the energy among the e^+e^- pairs [?], implying that one lepton carries most of the photon energy, leaving the second lepton with a too low momentum to be reconstructed. As a result these photons are not found by the conversion finding algorithms because only one of the two tracks is missing, whereas the leading track has been reconstructed.

Exploiting this feature, we have developed a dedicated track reconstruction that recovers those photon conversions for which the leading track has been already reconstructed. The leading track is used to drive the reconstruction of the second track, for this reason we refer to the algorithm as track-driven and to the leading track as the seeding track.

Our tracking algorithm is configured as an additional step of the CMS iterative tracking. Having to use all the available reconstructed tracks, it is the last to run after all the other standard iterative tracking steps. Similarly to the other steps, the track-driven algorithm starts from identifying trajectory seeds from which to build the full trajectories using the standard CMS tracking sequence, based on Kalman filter method in the pattern recognition and track refitting. Trajectory seeds are built from pairs of hits in the Pixel and/or in the Strip Tracker detectors. In order to reduce the number of hits to combine as well as to avoid to reconstruct already built tracks, only hits not associated to other tracks are used in the seeding search.

Due to the massless photon, the tracks of the resulting electrons from a photon conversion are parallel to each other at the conversion vertex, and open in two opposite arcs of circumference in the plane transverse to the CMS magnetic field ((x, y) plane in Fig. 6 (a)). whereas they remain parallel in the longitudinal plane ((z, r) plane in Fig. 6 (b)). This is a unique feature that is the basis of the algorithm we developed.

Not all the tracks from the standard collection are used to drive our seeding. The seeding tracks are selected applying the geometrical conditions imposed by the hypothesis of belonging to a prompt-photon conversion. As described in Fig. 6 (a), in the transverse plane the photon direction (VC) is tangent to both tracks in the conversion point C. Starting from a track and its associated primary vertex (V), with pure geometrical considerations the estimated position of the conversion vertex (C) is obtained. Given that a photon conversion happens in the material inside the tracker volume, from the beampipe onwards, tracks compatible with the conversion hypothesis cannot have the estimated vertex position (C) at a radial distance from the beamline (r_C) inferior to the radius of the beampipe ($r = 3$ cm). Applying this condition, relaxed of 0.5 cm to take into account the resolution of our geometrical estimation, prompt tracks from primary vertices are rejected, and only potential candidates from conversions are kept.

With the same approach, for a given seeding track having the estimated position of the conversion vertex at r_C only the pairs of consecutive layers located at a radial distance from the beamline above r_C are used to build the hit pair seeds. Having to reconstruct a track of opposite charge respect to the seeding track, only hit pairs in the semi-plane defined by the VC direction and opposite to the seeding track are considered. The search is limited to a maximum opening angle – with respect to the direction VC – correlated to the minimum p_T to be reconstructed, that in our case is 100 MeV/ c .

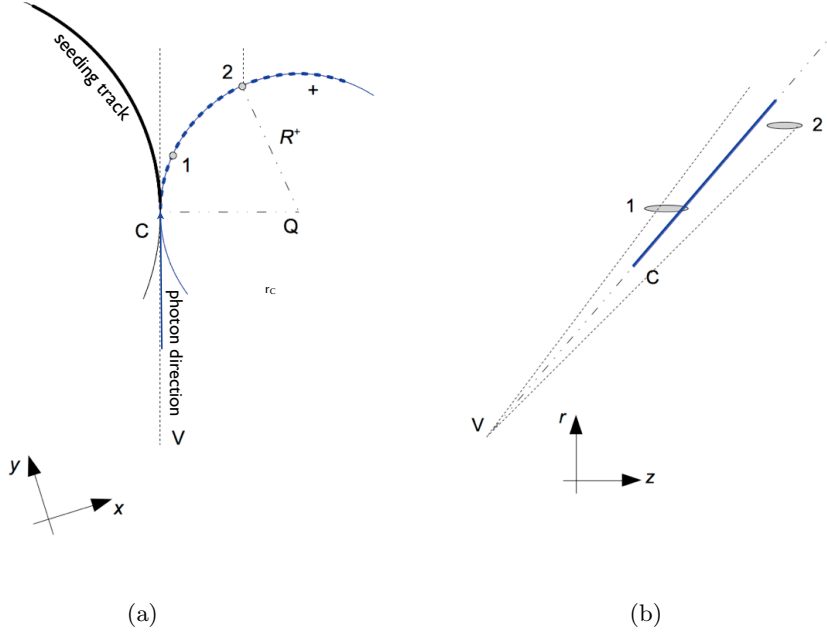


Figure 6. (a)

The requirement that the two conversion tracks are parallel to the photon direction in the rz plane (Fig. 6 (b)) allows to further reduce the number of hit combinations to keep into account, limiting the region of interest to a cone (WHICH SIZE???) around the seeding track.

For each seeding track a collection of hit pairs satisfying the above requirements is identified and used to construct the trajectory seeds, i.e. the proto-tracks providing the initial kinematic parameters needed for the trajectory propagation. At least three points are requested to evaluate the 5 parameters of the initial kinematic, but only two hits are provided per hit pair, and some of them have a coarse resolution in the z coordinate. The third measurement is provided, again, by the estimated position of the conversion vertex (C). The coordinates of these three points in the (x, y) plane allow to estimate the p_T of the trajectory seed. The direction of the trajectory seed in the (z, R) plane is imposed parallel to the seeding track.

Seeds are then propagated outward, adding compatible hits and updating the trajectory until either the detector boundary is reached, or no additional compatible hits can be found. In the final stage, the collection of hits is fit to obtain the best estimate of the track parameters.

6. Results

The impact of the dedicated tracking algorithm to the reconstruction of photon conversions can be seen on Fig. 7 and Fig. 8 showing the contribution of the different tracking steps to the photon conversion reconstruction, as estimated by the simulation, for the Tracker Barrel and Tracker EndCap respectively. The additional step increases by more than a factor two the number of conversions at large radii – outside the Pixel detector region – and contributes significantly ($\sim 20\%$) in the Pixel detector layers. At the same time the additional number of reconstructed fake photon conversions is kept low (Fig. 8), thanks to the demanding geometrical requirements adopted.

Table 1 summarises the reconstruction performance of our algorithm in terms of the increased number of true and fake photon conversions, distinguishing among barrel and endcap regions as well as among conversions undergone in the Pixel detector ($r < 15\text{cm}$) or in the remaining Tracker volume.

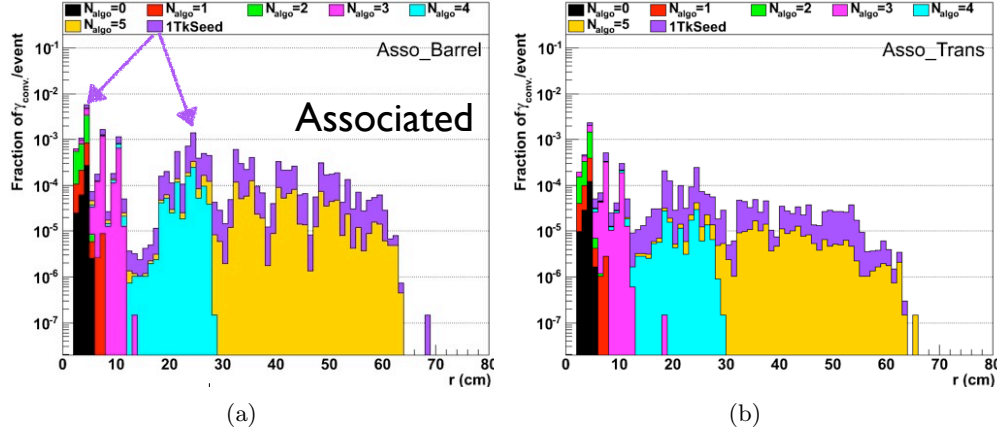


Figure 7. Fraction of the reconstructed photon conversions per event as a function of the radial position of the conversion vertex, for the barrel (a) and the endcap (b) regions, as estimated from simulation. The different colors correspond to the largest iterative step needed to reconstruct the tracks at the vertex.

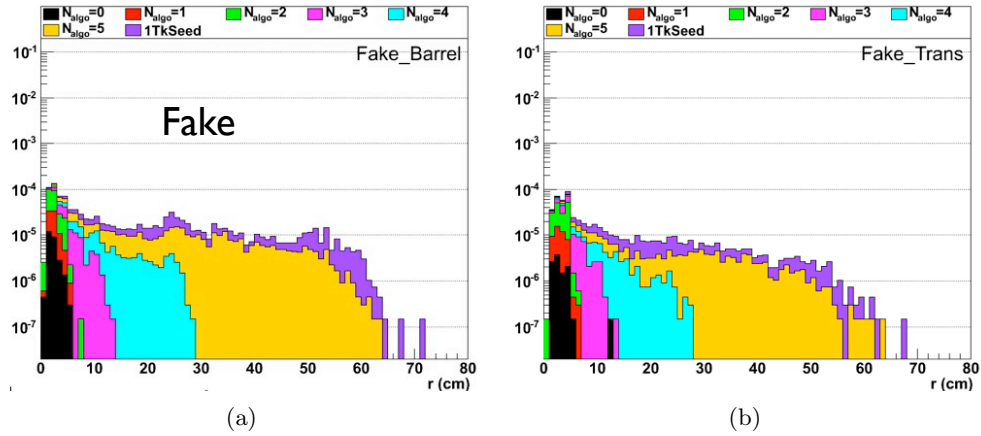


Figure 8. Fraction of the reconstructed fake photon conversions per event as a function of the radial position of the conversion vertex, for the barrel (a) and the endcap (b) regions, as estimated from simulation. The different colors correspond to the largest iterative step needed to reconstruct the tracks at the vertex.

In the overall increase of reconstruction efficiency we account also the improved efficiency in the transition region between the Tracker barrel and endcap. Figure 10 shows the reconstruction efficiency as a function of the conversion vertex position in the (z, R) plane, evaluated with simulated data using only the standard CMS algorithms (Fig. 10 (a)) or including our dedicated algorithm (Fig. 10 (b)). An increase of efficiency is visible in less populated area around $|\eta| \sim 1.2$ when the dedicated algorithm is adopted. This improvement is extremely useful to determine the amount of material in the transition region as well as to increase the detector acceptance for physics studies.

The dedicated Tracking sequence is reasonably fast BLA BLA BLA Mean Number of TrajSeeds per event (in events with at least one TrajSeed): about 20. Mean number of tracks in these events : about 50.

Table 1. Reconstruction performance of the dedicated algorithm in terms of the increase factor of true and fake photon conversions, distinguishing among barrel and endcap regions as well as among conversions undergone in the Pixel detector ($r < 15\text{cm}$) or in the remaining Tracker volume.

	true		false	
	$r < 15\text{cm}$	$r \geq 15\text{cm}$	$r < 15\text{cm}$	$r \geq 15\text{cm}$
barrel	+20%	+200%	+5%	+28%
endcap	+26%	+83%	+11%	+67%

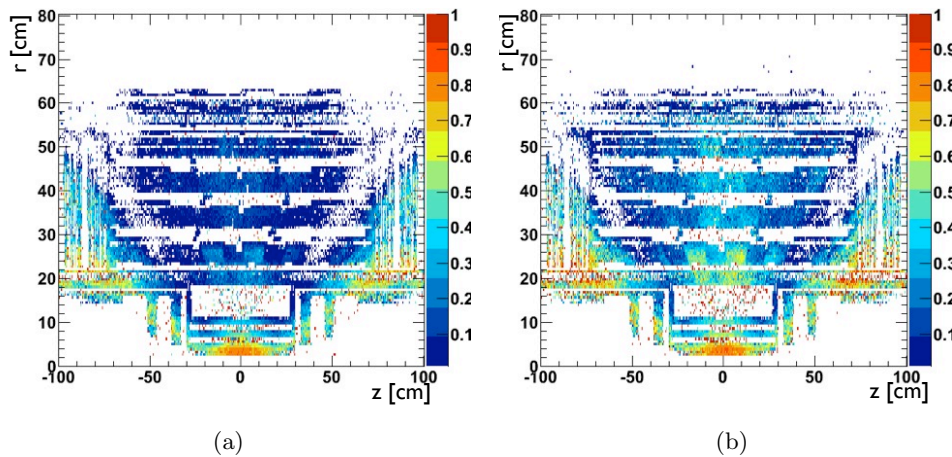


Figure 9. reconstruction efficiency as a function of the conversion vertex position in the (z, R) plane, evaluated with simulated data using only the standard CMS algorithms (a) or including the dedicated conversion algorithm (b).

7. Conclusions

The method here presented provides ...

References

- [1] CMS Collaboration. The CMS experiment at the CERN LHC. *JINST* **0803**, S08004 (2008).
- [2] S. Wasserbaech, *Computerized tomography of the ALEPH detector*, ALEPH Internal Note, ALEPH 97-08 (1997);
- [3] N. Marinelli et al, *Photon conversion algorithm*, CMS Analysis note in preparation;
- [4] H.B. Dwight, *Tables of Integrals and Other Mathematical Data*, New York and London, The Macmillan Company (1957);
M. Abramowitz, I.A. Stegun, *Handbook of Mathematical Functions with Formulas, Graphs, and Mathematical Tables*, New York, Dover Publications (1972), ISBN 978-0-486-61272-0;
- [5] W. Adam, B. Mangano, Th. Speer, and T. Todorov. Track Reconstruction in the CMS Tracker. *CMS Note* **2006/041**, (2006).
- [6] CMS Collaboration Tracking and Vertexing Results from First Collisions.
<http://cms-physics.web.cern.ch/cms-physics/public/TRK-10-001-pas.pdf>
CMS Physics Analysis Summary TRK-10-001, (2010)

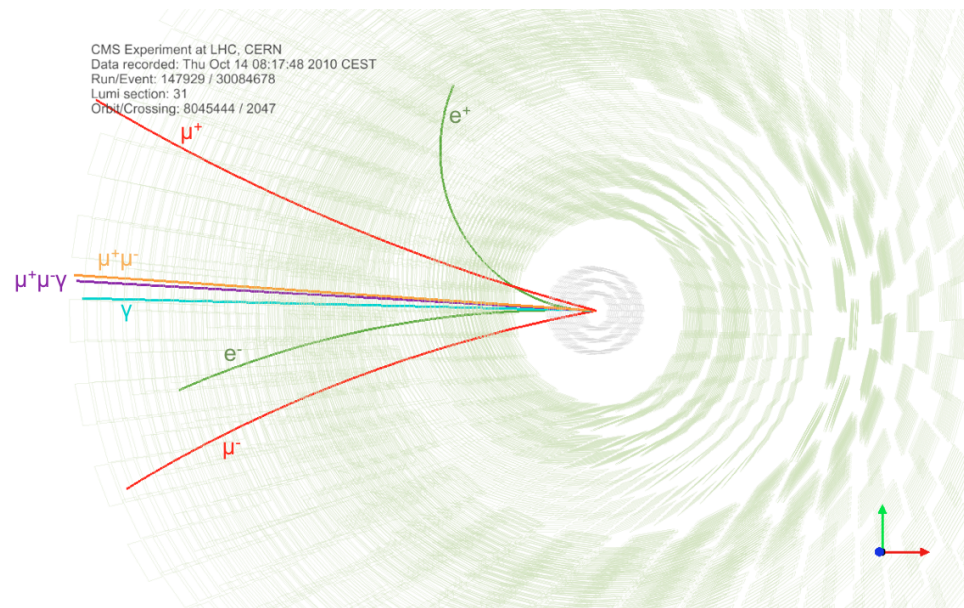


Figure 10. SPOSTARE??? TOGLIERE???