


CY8C4014SXA-421

16PIN SOIC

STESSA VERSIONE DI LIBRERIE CAPSENSE

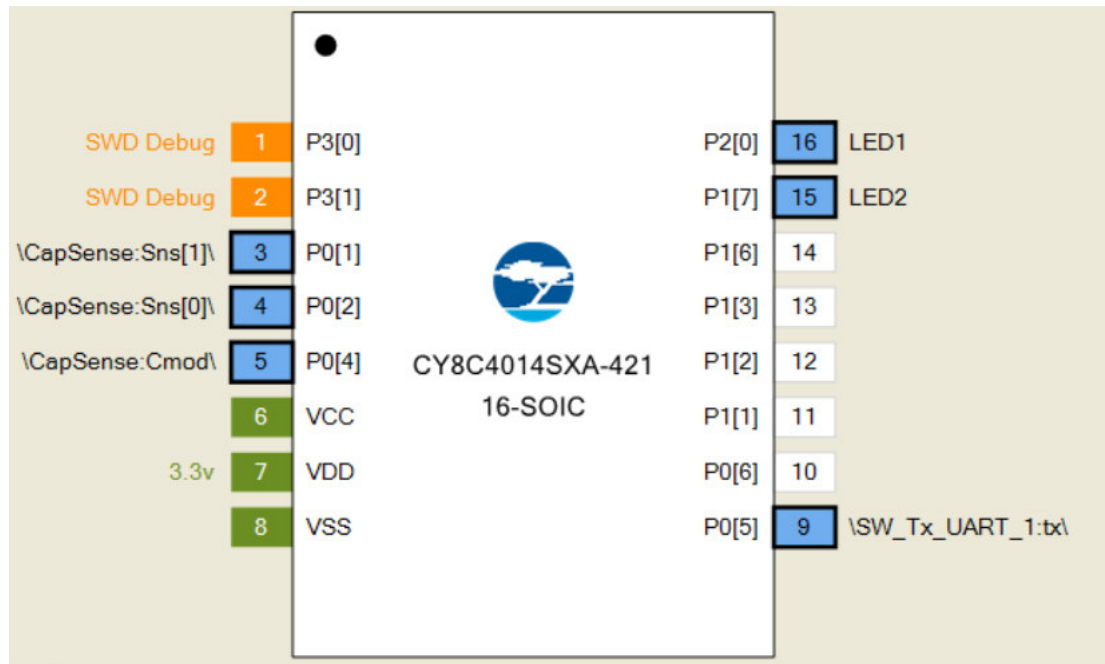


CY8C4024PVA-S411

20PIN SSOP

Utilizza una versione diversa di librerie CAPSENSE, sembra indicato per sensori livello.

Preveiamo anche una piazzola per saldare ADC_INPUT 0-1. Sono nella libreria e magari bastano quili per gli anelli.

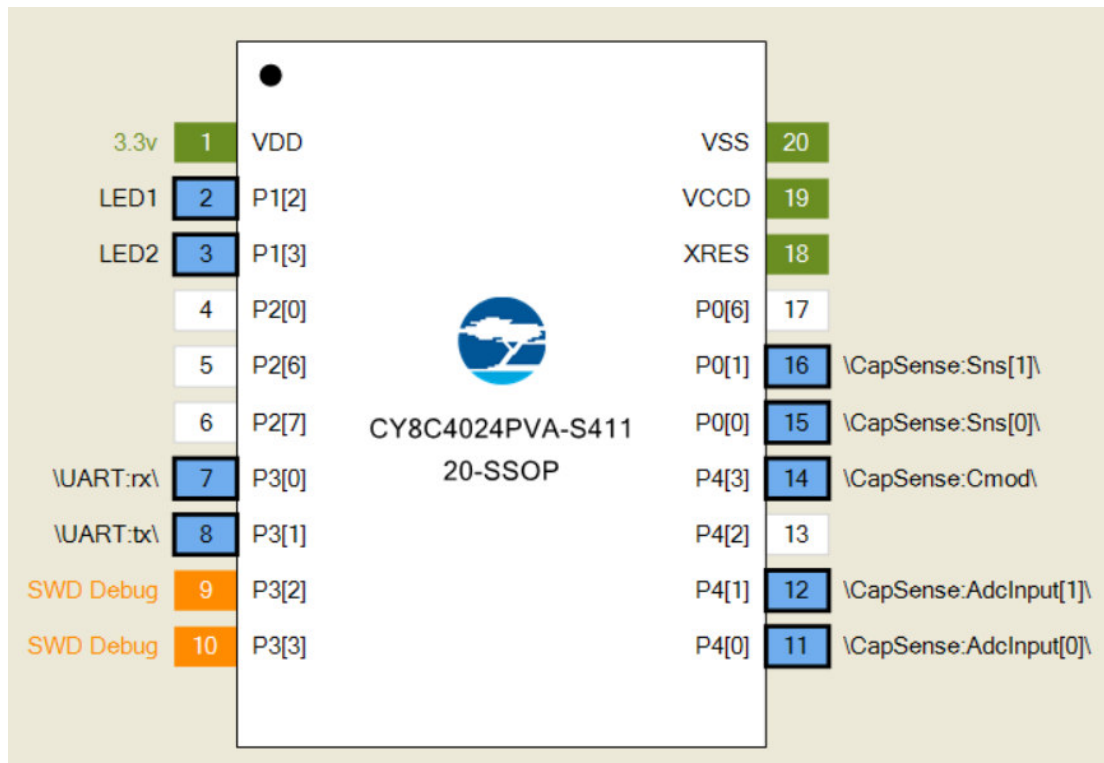

Name ^[1]	I/O Type	Description
C _{mod} ^[2]	Analog	External modulator capacitor. Mandatory for operation of the CSD sensing method and required only if CSD sensing is used. The recommended value is 2.2nF/5V/X7R or an NP0 capacitor.
C _{intA} ^[2]	Analog	Integration capacitors. Mandatory for operation of the CSX sensing method and required only if the CSX sensing is used. The recommended value is 470pF/5V/X7R or an NP0 capacitor.
C _{intB} ^[2]	Analog	
C _{sh} ^[2]	Analog	Shield tank capacitor. Used for an improved shield electrode driver when the CSD sensing is used. This capacitor is optional. The recommended value is 10nF/5V/X7R or an NP0 capacitor.
Shield	Analog	Shield electrode. Reduces the effect of the parasitic capacitance (C _p) of the sensor in the CSD sensing method. The number of shields depends on the user selection in the Component configuration wizard.
Sns	Analog	Sensors of CSD widgets. The number of sensors depends on the CSD widgets the user selects.