Scheda tecnica


- * Tensione di alimentazione 230Vac 50Hz [230Vac 60Hz - 110Vac 60Hz]
- * Assorbimento 400W
- * Prese ausiliarie 230Vac 50Hz 200W [230Vac 60Hz - 110Vac 60Hz]
- * Alimentazione tavolo di lavoro solo per 40.055.00 3-12Vac 230Vac 50Hz 200W [230Vac 60Hz - 110Vac 60Hz]

Technical data

- * Power supply 230Vac 50Hz [230Vac 60Hz - 110Vac 60Hz]
- * Power consumption 400W
- * Auxiliary outputs 230Vac 50Hz 200W [230Vac 60Hz - 110Vac 60Hz]
- * Working table voltage only for 40.055.00 3-12Vac 230Vac 50Hz 200W [230Vac 60Hz - 110Vac 60Hz]

Conforme alle direttive: 98/37/CEE e successive modifiche 89/336/CEE e successive modifiche 73/23/CEE e successive modifiche 93/42/CEE e successive modifiche

Comply to the directives: 98/37/CEE and following modifications 89/336/CEE and following modifications 73/23/CEE and following modifications 93/42/CEE and following modifications

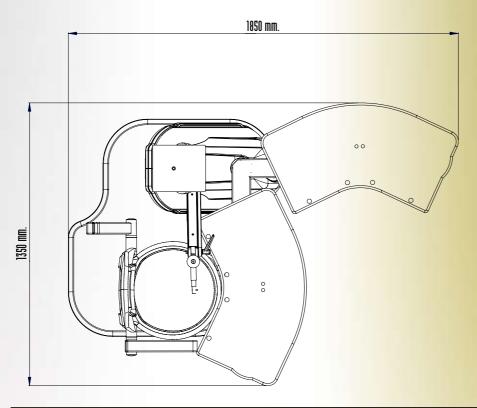






MeccanotticaMazzası ambienti oftalmici

20048 CARATE BRIANZA (MI) - ITALIA - VIA TIZIANO, 9 TEL.++39.0362.902185 r.a. FAX++39.0362.903306 info@meccanotticamazza.it www.meccanotticamazza.it

CERTIFICATED COMPANY ISO 9001: 2000

CONFORME ALLA MARCATURA (€

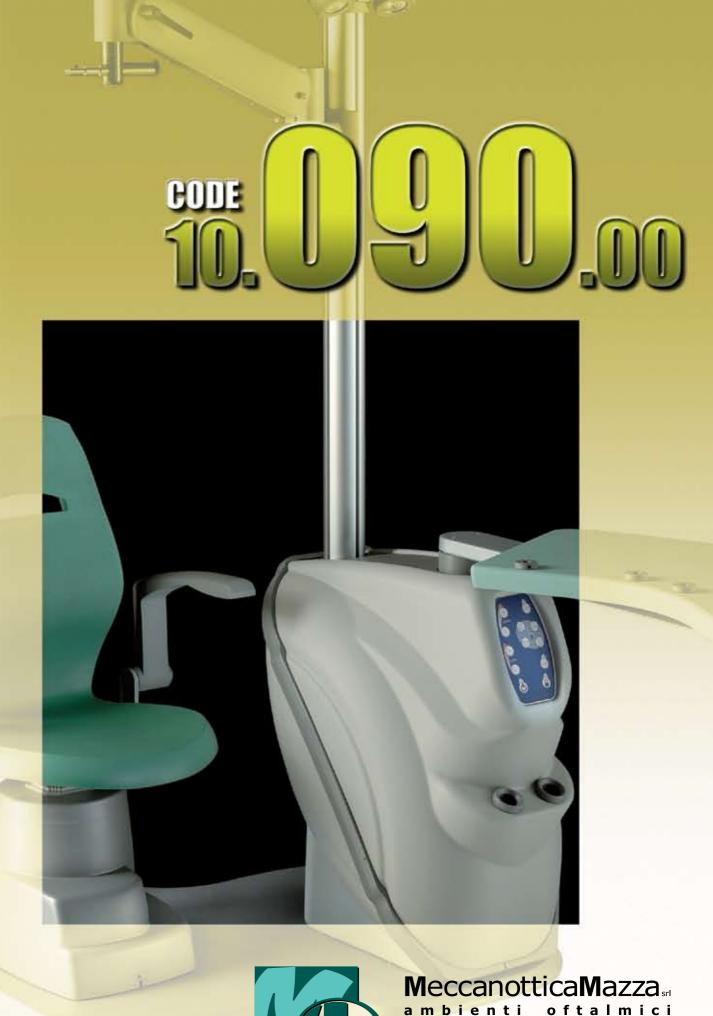





Supporto fisso e supporto snodato porta monitor (optional)


Fix and movable monitor supports (optional)





Riunito con strumenti

Unit with instruments



Unit with fix instruments table with lock system in all positions





Modulo per forottero con movimento manuale (optional)

Manual phoroptor arm module (optional)



Pannello comandi digitale e supporto strumenti a mano

Digital control panel and hand instruments support

Spot aggiuntivo da colonna (optional)

Extra spot light (optional)