The name, on a post

One panel, the name only — no service list, no photograph. Trim 1168 × 559 mm, the client's 3 ft 10 in × 1 ft 10 in, double-sided. EDDWALIRO heads the panel above the badge: the road reads Luganda first, and the English name keeps the widest line.

HIGH 1 FT 10 IN / 558.8 MM



LONG 3 FT 10 IN / 1168.4 MM

MEASUREMENTS

- Trim: 1168.4 × 558.8 mm — 3 ft 10 in × 1 ft 10 in, i.e. 46 × 22 in (25.4 mm to the inch).
- Bleed: 10 mm all round, so the printed sheet is 1188 × 579 mm. Safe area 25 mm in from trim.
- Artwork is supplied at 1 : 1 in millimetres — plot it, do not scale it.
- Both faces are in the one PDF: print the file twice for a two-sided panel, or once per face for two single-sided panels back to back.

Two ways to set the name

A is the approved setting and it is what the print files carry: EDDWALIRO heads the panel, the badge sits under it, MEDICAL CENTRE takes the widest line and the motto closes the block. C is the fascia setting — the same elements turned on their side, badge at the left, the name run beside it. It is a spare, supplied in case the client wants the length used differently.



OPTION A — CENTRED STACK · IN THE PRINT FILES



OPTION C — FASCIA SETTING · SPARE

EITHER WAY


- EDDWALIRO heads the panel, bold and in cyan: the Luganda word is read first, the English name is the widest line.
- BCM stays small and cyan above or beside the badge: the initials, not the headline.
- The motto sits under the name and can be dropped for a name-only panel.
- The telephone can be added at the foot, on both faces, on request.

How it sits at the entrance

1.17 m of panel, 0.65 m² of face: panel centre 1500 mm above finished ground level and 2 posts under it are a proposal — the post centres and the frame must come from the signwriter who builds it.



DAY — MATTE FACE, STREET LIGHT

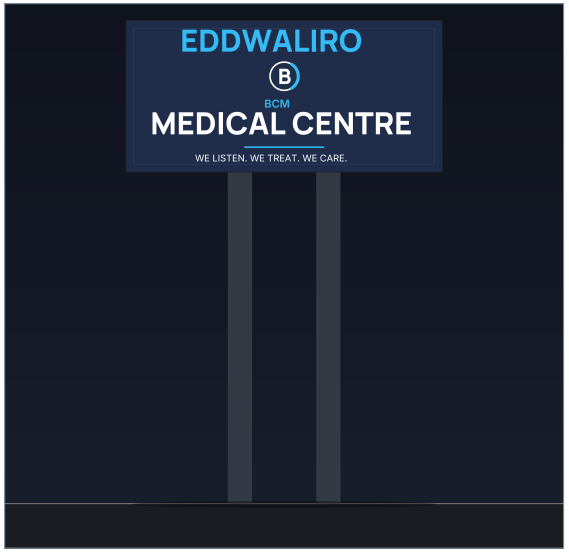

NIGHT — IF THE PANEL IS LIT

DRAWN TO SCALE · PANEL CENTRE 1500 MM ABOVE FINISHED GROUND LEVEL · TWO POSTS SHOWN AS A PROPOSAL

- The face is 0.65 m² of panel, 1168 mm long. The name is set to read from the road, so it stays legible well past the gate.
- Two posts carry it at 520 mm centres; a rail or cleat frame behind the panel is the alternative, and it keeps the face free of fixings.
- If the panel is to be read from one direction only, one face is enough — the artwork is the same on both.

Production specification

SUBSTRATE — CONFIRM WITH THE SIGNWRITER

- The face is 0.65 m². 3 mm aluminium composite (ACM), matte white, is the industry-typical substrate. Not a quotation — the signwriter decides.
- Direct-to-substrate UV print, or cast vinyl applied and laminated, on a matte white core. Edges cut back to trim and sealed.
- Double-sided: either two printed faces on one core, or two panels on a frame. The artwork is identical on both faces.
- Finish: matte anti-glare laminate. Gloss will mirror the sky and kill the contrast the navy depends on.

FIXING — CONFIRM WITH THE INSTALLER

- Proposal: Two galvanised posts at 520 mm centres, set 600 mm into concrete footings, panel centre 1500 mm above finished ground level.
- Stainless fixings into a bracket or frame behind the panel, never through the printed face. Do not drill the face.
- Wind loading: 0.65 m² is a modest sail, but the footing and the bracket still need the signwriter's own calculation for the site.

BEFORE PLOT

- Measurement is the client's: 3 ft 10 in × 1 ft 10 in. Check it against the panel the signwriter is actually making before the file is plotted.
- The sheet is supplied at 1 : 1 in millimetres — plot it, do not scale it on the plotter, and leave the crop marks outside the bleed.
- The monogram is a recreation, not BCM's official logo — swap the vector in.
- Confirm the fascia wording and the spelling of EDDWALIRO with the client before plot.

THE FILE

- Trim 1168.4 × 558.8 mm, bleed 10 mm all round, so the page is 1188.4 × 600.8 mm — 1 : 1, no scaling.
- A 22 mm slug runs along the foot with the file name, the trim and the colour note — trim it off.
- Safe area 25 mm inside trim. Crop marks at the four corners, outside the bleed.
- Colour: navy #16233F, cyan #2BA9E0, mist #E8EEF4, white. Supply as CMYK or let the printer convert — do not colour-manage the navy towards black.