PREMIUM HEALTHCARE · GLASS DOOR GRAPHICS

ONE-WAY VISION FILM

A coordinated system of perforated window graphics for the reception, consultation rooms, laboratory, pharmacy and imaging suite of a private medical centre. Real photography, quiet colour, type that survives perforation.

CLIENT

MEDICAL CENTER (PLACEHOLDER)

GMC / OWV / DESIGN LOOKBOOK · REV R1 · 2026-10-28

PROVISIONAL — AWAITING MEASUREMENTS

01 DESIGN INTENT

Quiet authority, not decoration

TRUST BEFORE STYLE

Patients read a building before they read a sign. The panels use a single deep navy field, one photograph and one headline, so the impression is competence rather than marketing.

BUILT FOR PERFORATION

One-way film removes roughly two-fifths of the surface and softens edge contrast. Headlines are 70–78 mm cap height, weights stay at 600 or above, and no live detail sits on a mid-tone.

ONE SYSTEM, FIVE SERVICES

Every panel shares the same photographic band, the same baseline for the department name, and the same lockup position — so a corridor reads as one institution even though each door names a different service.

PALETTE



NAVY

#0A2642

ground / 80% of panel area



NAVY DEEP

#06182A

shadows, lockup ground

TEAL

#0F8C8C

accent, rules, labels

MEDICAL GREEN

#2E7A5F

secondary accent only

MIST

#DCE6EC

typography on navy

WHITE

#FFFFFF

headlines

TYPOGRAPHY

MANROPE

Department names, 300–800. Geometric, open apertures, holds up at 70 mm cap height and still reads through a 38% perforation.

INTER

Labels, indices and technical text, 400–600 with 0.15–0.25 em tracking. Used at 5–8 mm cap height; never below 4 mm anywhere on a panel.

NO THIRD FACE

One display family and one text family. Weight and scale carry hierarchy — not a third typeface, not italics, not outline type.

The panel suite

Eight independent panels, five services. Fixed elements — photographic band, headline baseline, accent rule, lockup — sit at identical heights across the set so adjacent doors align. Sidelights are graphic-only, giving the eye a rest between photographic panels and preserving daylight into the corridor.

P-01

100 × 210 CM · 1 : 2.10

P-02

45 × 210 CM · 1 : 4.67

P-03

90 × 210 CM · 1 : 2.33

P-04

90 × 210 CM · 1 : 2.33

SHOWN AT 1 : 17.5 — TRUE RELATIVE SIZES, ALL PANELS 210 CM HIGH

The panel suite, continued

Laboratory, pharmacy and imaging panels, plus the second fixed sidelight. The imaging door is a pair of 600 mm leaves carried on one plot, split at the centre line; no headline crosses the meeting stile.

P-05

90 × 210 CM · 1 : 2.33

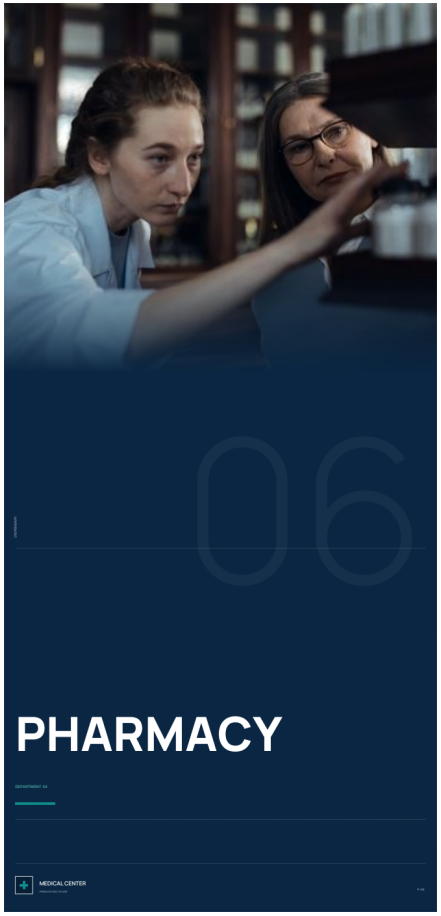

P-06

100 × 210 CM · 1 : 2.10

P-07

120 × 210 CM · 1 : 1.75

P-08

45 × 210 CM · 1 : 4.67

SHOWN AT 1 : 17.5 — TRUE RELATIVE SIZES, ALL PANELS 210 CM HIGH

RECEPTION & CONSULTATION

Arrival, then privacy. Reception carries the warmest frame in the set — an exchange between a receptionist and a patient — while consultation panels use a seated, eye-level exchange held at a respectful distance. No exposed patients, no procedure imagery, no stock-smile close-ups.

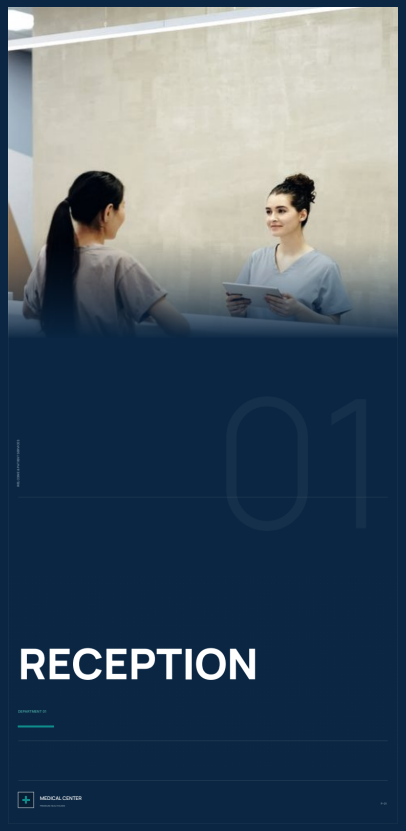

P-01 · RECEPTION

A-01 CEDRIC FAUNTLEROY / PEXELS

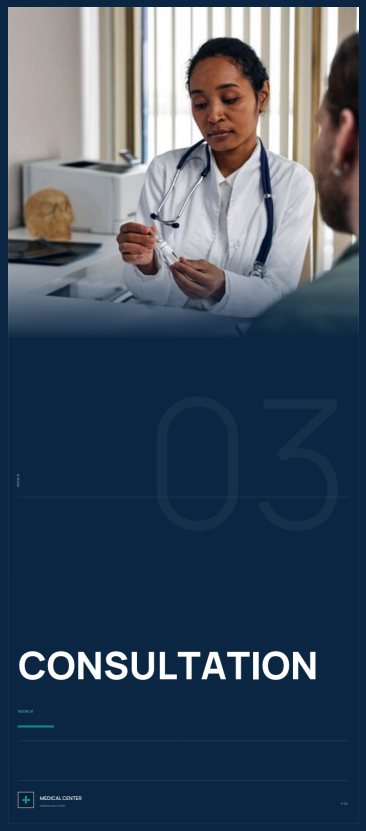

P-03 · CONSULTATION

A-02 COTTONBRO STUDIO / PEXELS

LABORATORY · PHARMACY · IMAGING

Competence, order, technology. The laboratory frame is a working bench, not a prop; the pharmacy frame is organised shelving with faces held sharp; imaging uses the symmetry of the scanner, echoed by the double door's centreline.

P-05 · LABORATORY

A-04 PAVEL DANILYUK / PEXELS

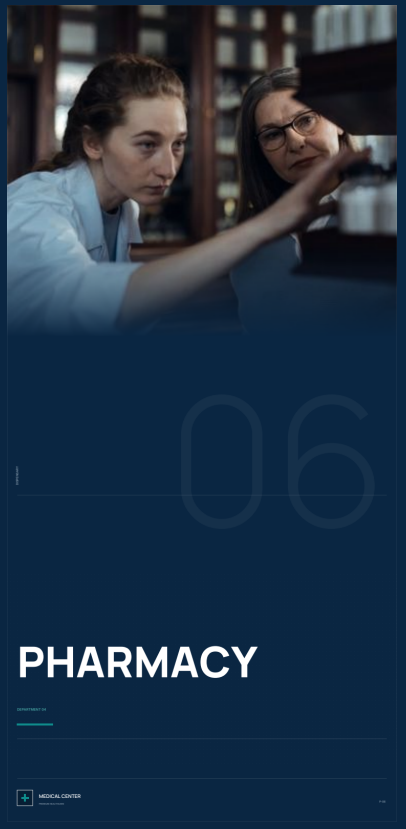

P-06 · PHARMACY

A-05 COTTONBRO STUDIO / PEXELS

P-07 · IMAGING

A-06 MART PRODUCTION / PEXELS

IN SITU

How it reads on the door

Elevations composed at true scale from the actual artwork, with hardware drawn to position. Handle, closer and meeting stile are all shown where they will sit.

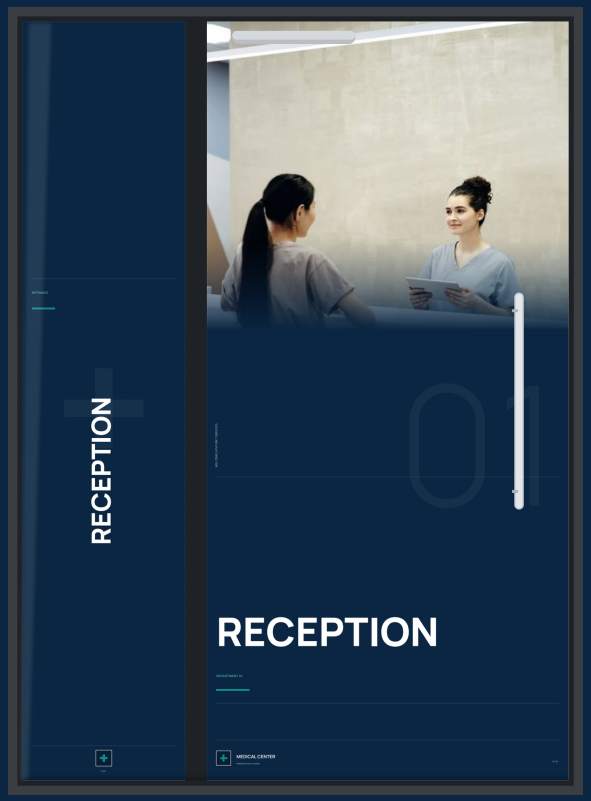

P-01 + P-02 · RECEPTION ENTRANCE

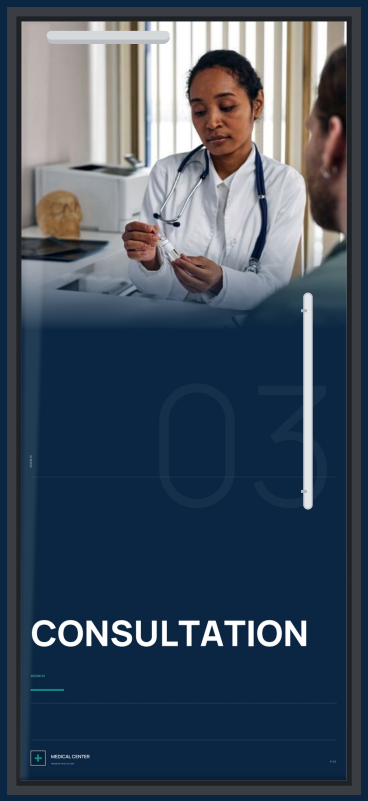

P-03 · CONSULTATION ROOM

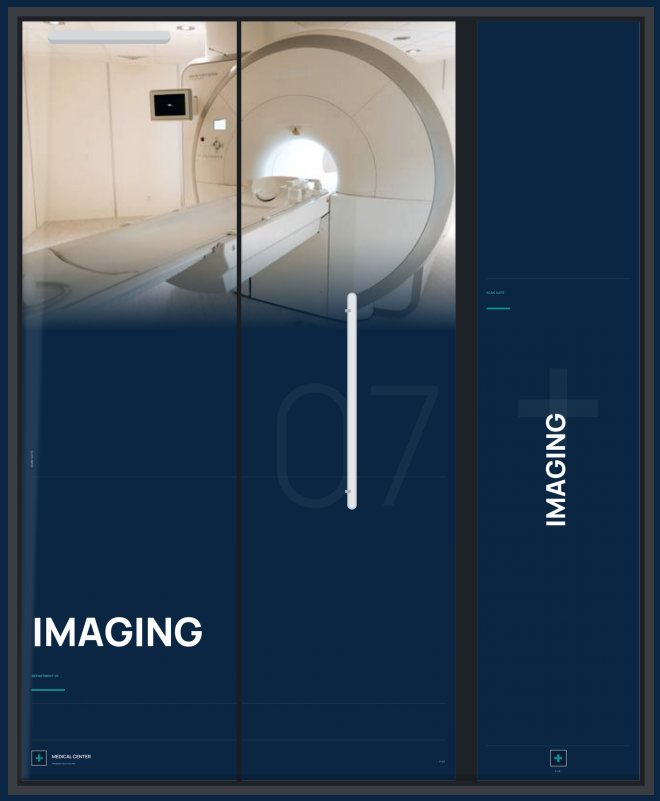

P-07 + P-08 · IMAGING SUITE

ELEVATIONS AT 1 : 20.2 · HARDWARE SHOWN FOR CLEARANCE ONLY AND IS NOT PRINTED

Designing for perforation

The film removes a regular grid of holes — typically 1.6 mm holes on a 2.3 mm pitch, about 38% open area. Ink only survives on the 62% that remains, so fine hairlines, small type and low-contrast detail disappear at distance. Each rule below is a direct consequence of that, not a style preference.

DETAIL AT 1 : 1.7 — SIMULATED 1.6 MM HOLES / 2.3 MM PITCH

Headline counters stay open at 78 mm cap height; the 4.6 mm accent rule still reads as a line; nothing thinner survives the grid.

RULES APPLIED TO THIS SET

- Minimum live type: 4 mm cap height; labels are 6–7 mm, headlines 70–78 mm.
- Minimum stroke 0.3 mm printed — hairline rules are decorative, never load-bearing.
- Headlines sit on solid navy, never over photography, for maximum edge contrast.
- Photography covers 40–45% of a door panel; sidelights carry no photograph at all.
- One gradient only: the 260 mm navy hold-down that ties image to field.
- Bottom 140 mm of every panel is a kick zone — no live content below the lockup.

VISIBILITY BALANCE

PANEL TYPE	PHOTO COVERAGE	DARK FIELD	TO OUTSIDE	INTENDED EFFECT
SINGLE DOOR 1000 MM	40%	60%	GOOD	READABLE SIGN, SILHOUETTES VISIBLE
SINGLE DOOR 900 MM	40%	60%	GOOD	SAME RHYTHM, NARROWER HEADLINE
DOUBLE DOOR 2 × 600 MM	40%	60%	GOOD	CENTRE SPLIT KEEPS HANDLE ZONE CLEAR
FIXED SIDELIGHT 450 MM	0%	100%	EXCELLENT	GRAPHIC ONLY — MAXIMUM DAYLIGHT

What is in the package, and what is still provisional

SUPPLIED NOW

- Eight true-size artwork PDFs (artwork folder) with 10 mm bleed, crop marks, registration target and a technical slug outside the trim.
- Panel schedule: dimensions, orientation, hardware, crop logic, coverage and print notes.
- Image source and licence log with creator, provider, licence and original pixel size.
- Resolution audit at final print size, per panel.
- Production specification, installation schedule and a printer RFQ.
- This lookbook.

NEEDED BEFORE FINAL OUTPUT

- Measured width and height of every glass section, in centimetres, plus a photograph of each door with hardware in frame.
- Exact department names, room numbers and any secondary language text.
- Client logo in vector form, plus approved contact details and any claims permitted.
- The film maker's technical sheet: hole size and pitch, ink coverage limit, bleed and safe-zone allowance, and sheet width.
- Confirmation of installation method and whether the film is to be applied inside or out.

01

RECEIVE

Measured schedule, door photographs, logo, printer sheet

02

RE-CUT

Panel engine re-flows type and crop to the real dimensions

03

PROOF

Colour-managed proof at 100% on the specified film

04

OUTPUT

Print-ready PDFs with bleed, marks and a per-panel slug

05

INSTALL

Wet or dry application, then a 1 m inspection

Until the measured schedule arrives, treat every dimension in this package as a representative module. The layout engine is parametric: supply the real numbers and the set is re-cut — type re-fits, crops re-centre, nothing is stretched.