The name, on a post

One panel, the name only — no service list, no photograph. Trim 1219 × 610 mm, the client's 4.00 ft × 2.00 ft, double-sided. EDDWALIRO heads the panel above the badge: the road reads Luganda first, and the English name keeps the widest line.

H 2.00 FT / 610 MM



W 4.00 FT / 1219 MM

MEASUREMENTS

- Trim: 1219.2 × 609.6 mm — 4.00 ft × 2.00 ft at 304.8 mm to the foot.
- Bleed: 10 mm all round, so the printed sheet is 1239 × 630 mm. Safe area 25 mm in from trim.
- Artwork is supplied at 1 : 1 in millimetres — plot it, do not scale it.
- Both faces are in the one PDF: print the file twice for a two-sided panel, or once per face for two single-sided panels back to back.

Two ways to set the name

A is the recommendation: EDDWALIRO heads the panel, the badge sits under it, and MEDICAL CENTRE takes the widest line, so the eye lands on the English name. B keeps EDDWALIRO at the head but repeats the badge-left lockup used on the door panes, for continuity between the sign post and the stickers.



OPTION A — CENTRED (RECOMMENDED)




OPTION B — BADGE-LEFT LOCKUP

EITHER WAY

- The name is set at the largest size the panel will take — it spans the full measure, which is what makes it pointable from across the road.
- EDDWALIRO heads the panel above the badge, at the same cap height as the name, bold and in cyan: the Luganda word is read first, the English name is the widest line.
- BCM stays small and cyan above that: the initials, not the headline.
- The motto sits under the name and can be dropped if you want nothing but the name on the post.
- The telephone can be added at the foot — say the word and it goes on both faces.

How it sits at the entrance

Drawn to scale: panel centre 1500 mm above finished ground level, posts at 520 mm centres. Mounting height and post centres are proposals — confirm on site.

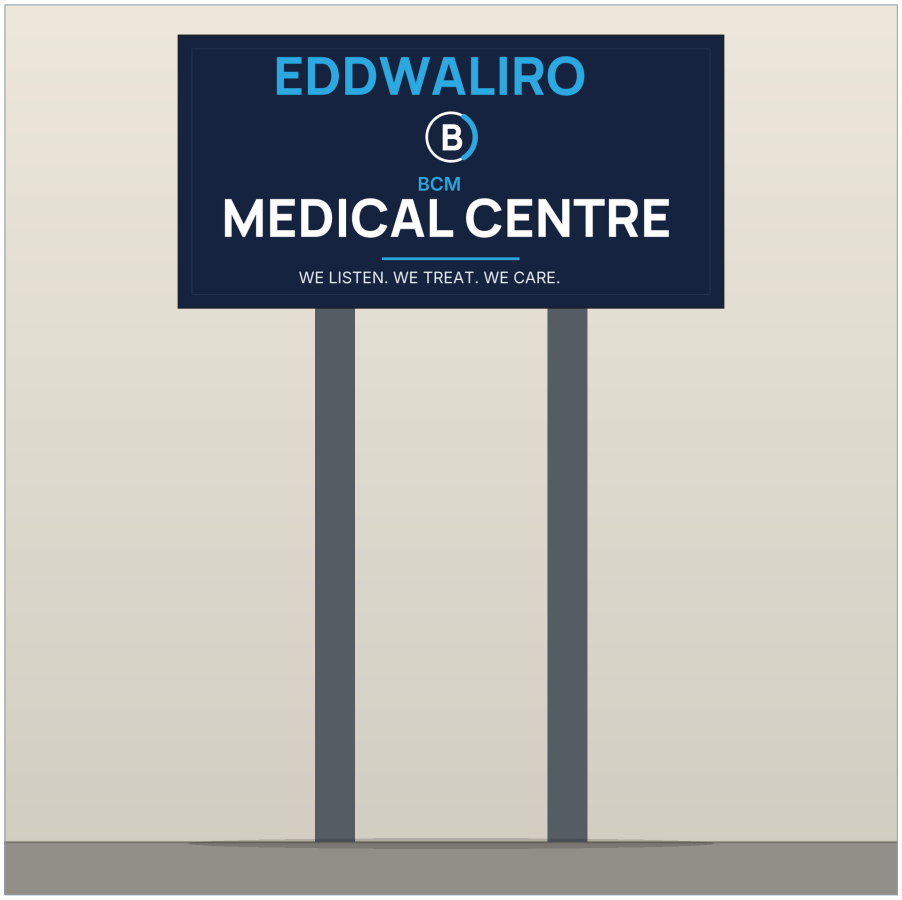

DAY — MATTE FACE, STREET LIGHT



NIGHT — IF THE PANEL IS LIT

DRAWN TO SCALE · PANEL CENTRE 1500 MM ABOVE FINISHED GROUND LEVEL

Production specification

SUBSTRATE — CONFIRM WITH THE SIGNWRITER

- 3 mm aluminium composite (ACM) panel, matte white, direct-to-substrate UV print, or 3 mm ACM with cast vinyl applied and laminated — industry-typical, not a quotation.
- Double-sided: either two printed faces bonded back to back on one ACM core, or two panels on a frame. The artwork is identical on both faces.
- Edges: 3 mm radius, sealed. The artwork bleeds 10 mm and is cut back to trim, so no white edge shows.
- Finish: matte anti-glare laminate. Gloss will mirror the sky and kill the contrast the navy depends on.

FIXING — CONFIRM WITH THE INSTALLER

- Two 76 mm galvanised posts at 520 mm centres, set 600 mm into a concrete footing; panel centre 1500 mm above finished ground level.
- Stainless fixings through the face into a bracket, or a channel frame behind the panel — both keep the face free of bolts. Do not drill the printed face.
- Wind loading: a 0.61 m² panel on two posts is a modest sail, but the footing and the bracket still need the signwriter's own calculation for the site.

BEFORE PLOT

- Measurement is the client's: 4.00 ft × 2.00 ft. Check it against the panel the signwriter is actually making before the file is plotted.
- The monogram is a recreation, not BCM's official logo — swap the vector in.
- Confirm the fascia wording: the clinic's own board reads Community Health Centre; this sign uses BCM Medical Centre as instructed, with EDDWALIRO at the head of the panel.
- Confirm the spelling of EDDWALIRO with the client before plot.
- The two help-line numbers, if they go on, come off the clinic's premises boards.