
STANDARD OPERATING PROCEDURE OF Specific Gravity VF-A04

Lab /SOP/ 02

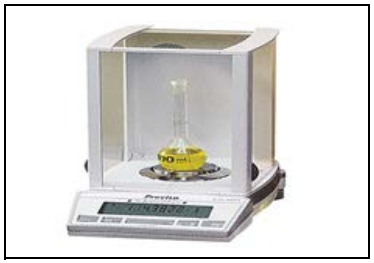

Balance, capable of weighing to 0.001grams.

Support bridge


Sinker with clean thin wire



250ml glass beaker

Distilled water

Alcohol,for removing air bubbles from the sample.



EVA sample size at least 1 cm X2 cmX10mm

Rubber Sample size at least 2 cm x 2cm

Test two samples per material



Place the support bridge over the weighing pan such that no portion of the support bridge contacts the weighing pan.



Place the 250ml beaker on the support bridge with distilled water. The height of water should at least 10 mm above the tray when submerged with hook.




Hang the tray on the hook and ensure that it will not contact from the bottom or sides of the beaker.

Zero in the balance by pressing T.



Weigh the sample in air.




When the value of weight in air appears and the figure already stable press REF .

Wait till the word “LIQUID “appears.




Take out the sample. To avoid bubbles dip in alcohol (for 1-2seconds) shaking any excess alcohol from the test sample then dip again in distilled water.



Place the sample inside the tray and ensure that the tray must not contact any portion of the beaker.



Immediately (to minimize any absorption of water into the sample) check the weight by pressing the icon REF.

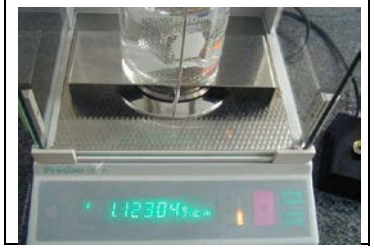

Value of specific gravity appears.

Specific Gravity (g/cm3) = W/A x T

Prepared by	Approved by	REVISION		DATE	