


Product Knowledge

Power Tiller **TRA CHANG**



Available model of Power Tiller **TRA CHANG**

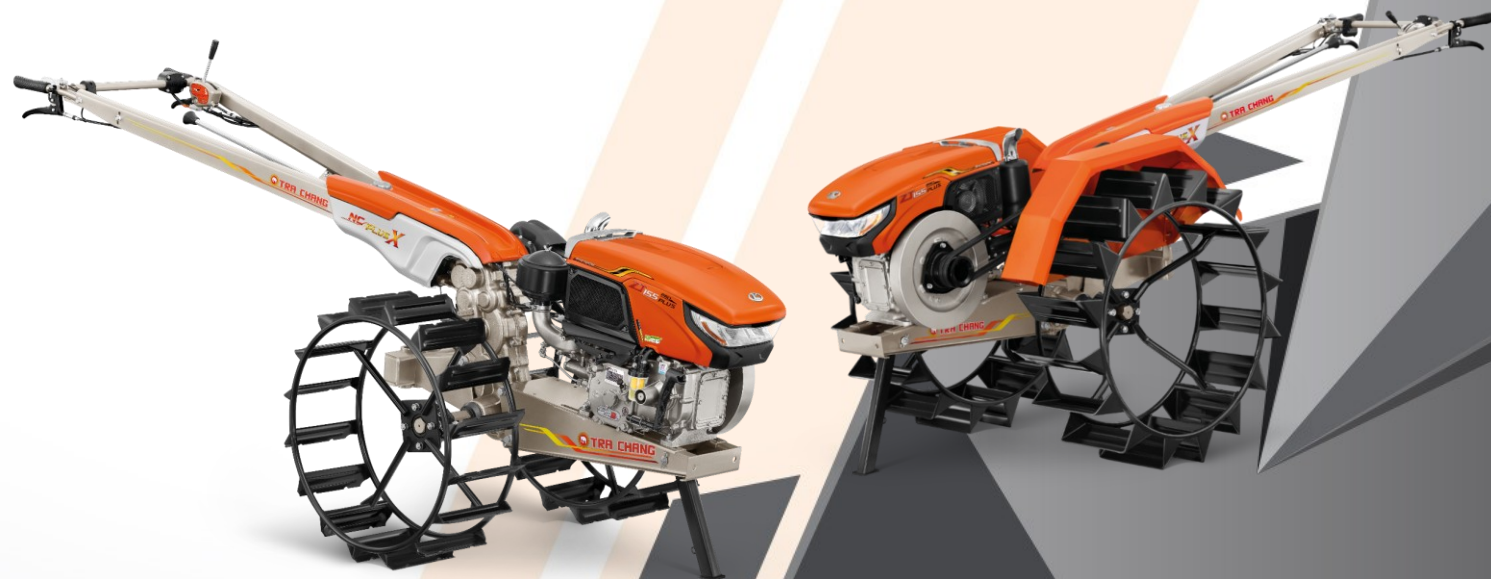

NC PLUS X

Cage wheel diameter 800 mm.
Wheel blade 3 inches 16 pieces



NC PLUS X Special

Cage wheel diameter **880** mm.
Wheel blade 4 inches 16 pieces



NC PLUS X Special

Cage wheel diameter **980** mm.
Wheel blade 5 inches 16 pieces

Selling point of power tiller **TRA CHANG**



- The gear housing is made of Special Cast Iron (SCI).
Durable and tough



- 4 gears which consist of 3 forward gears and 1 reverse gear



- Agile with a light steering system, easy to control the direction of turning



- Gear insert
(Only in NC plus X special)

Benefits of gear insert

- 1) Help to distribute load at gear tooth while using to enhance strength and durability. The gear can be reversed when those on the other side have worn down.
- 2) Safety bolt help to reduce the risk of damage to the gear system.



Application of power tiller



TRA CHANG



NC PLUS X

Cage wheel diameter **800** mm.

- Suitable for loamy soil, sandy soil
- Can be used in both paddy fields and dry fields
- Can be used in sugarcane fields, cassava fields, beans and vegetable plots
- Able to use cage wheels to travel for short distances



Recommendation :

Not suitable for use in the **puddle** field



NC PLUS X Special

cage wheel diameter **880** mm. & **980** mm.

- Suitable for soil preparation in clay soil or puddle field
- Suitable for rice field that plant more than 2 times per year



Recommendation :

- If you need to move NC plus X special, you should change to rubber wheels or use trailer
- For working in puddle field, should use with KUBOTA diesel engine ZT Plus 14-15.5 HP

TRA CHANG power tiller can change to be rubber wheel for transportation.

Notice point of Power tiller **TRA CHANG** 2 Models



NC PLUS X

Appearance

- Cage wheel's diameter 800mm
- Shorter Hitch length
- No Stud Bolt at Wheel joint
- Cannot install fender

Internal parts

- **Standard turning system**
 - For normal operation
- **Standard clutch set**
 - For normal operation
- **Standard Bearing**
 - Ball type bearing
 - Strong and durable

***** NC Plus X cannot working with 880/980 mm diameter cage wheel. It will damage to gear and clutch system**



NC PLUS X Special

Appearance

- Cage wheel's diameter 880 & 980mm
- Longer Hitch length
- Stud Bolt at Wheel joint
- Fender Installable (Optional)

Internal parts

- **Gear Insert turning system**
 - Strong and durable suit for heavy duty
 - reversible when worn out
 - Safety bolt for damage preventive
 - Better handling
- **Special clutch set**
 - Better transmission suitable for heavy duty
- **Special Bearing**
 - Roller bearing suitable for bigger cage wheel
 - Strong and durable

Notice point of NC PLUS X and NC PLUS X Special




NC PLUS X

Cage wheel diameter 800 mm.

1st notice point : Case No. at Warranty card

Case No. Chassis **"NC131"** (No **"S"** after)

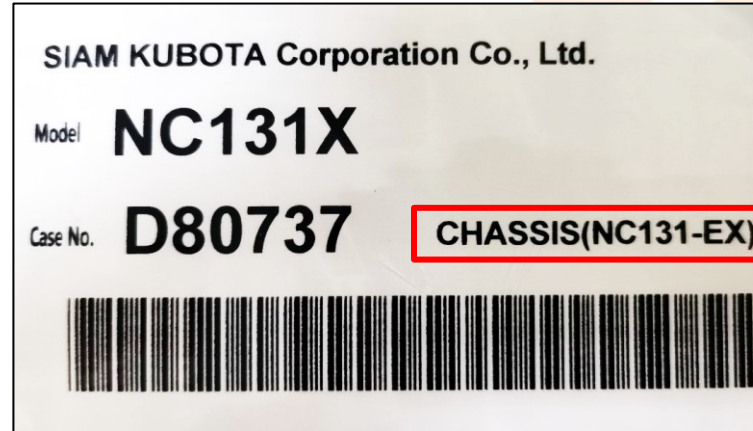


CHASSIS(NC131-EX)



NC PLUS X Special

cage wheel diameter 880mm. & 980 mm.

Case No. Chassis **"NC131S"** (has **"S"** after)

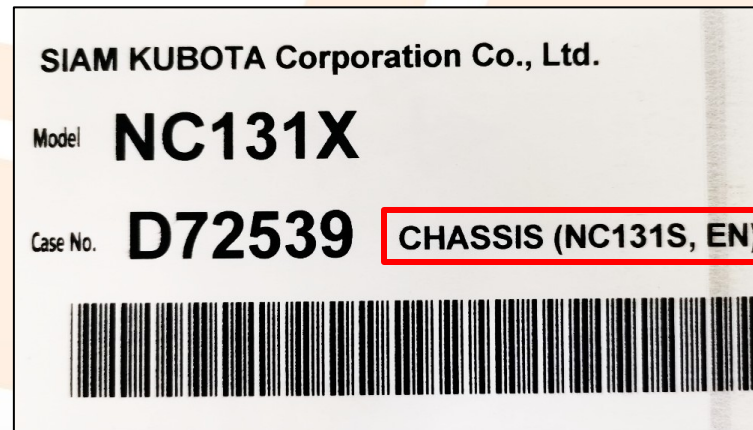

CHASSIS (NC131S, EN)



Notice point of NC PLUS X and NC PLUS X Special



NC PLUS X

Cage wheel diameter 800 mm.

2nd notice point : Punching Mark "S" at Gear case

No Punching mark **"S"** at gear case for NC Plus X



NC PLUS X Special

cage wheel diameter 880mm. & 980 mm.

NC PLUS X **Special** has punching mark **"S"** at gear case



Warranty of power tiller **TRA CHANG**



- ***3 years warranty
except gear housing
that has lifetime
warranty***

Please learn more about the warranty conditions.

Application of power tiller **TRA CHANG**

Soil preparation



Transportation



Component of power tiller **TRA CHANG**

