a

$$N(t) = \frac{a\,\langle\, S \cdot M_c \,,\, G_c \rangle + b_c}{c|a|\,\langle\, S \cdot M_c \,,\, G_s \rangle + d_c} - b_c/d_c$$

Input gain (m7): $M_c(g) = 1 + \sum_t w_{ct} A_t(g)$, $w = g_{HP}$ at HP, g_{LP} elsewhere
b-field: $b_c = b \exp(w_b F_c)$
d-field: $d_c = d \exp(w_d F_c)$, F_c = HP/LP field (σ_{AF}, θ) over the pRF

Input: field on the image, reaches the surround

b: baseline of the pRF centre

d: normalization constant

b

Pending: held-out comparison (run3, frozen pRFs)

Pending: dS per model

c

Pending: recovery

Pending: recovery

Pending: recovery

d

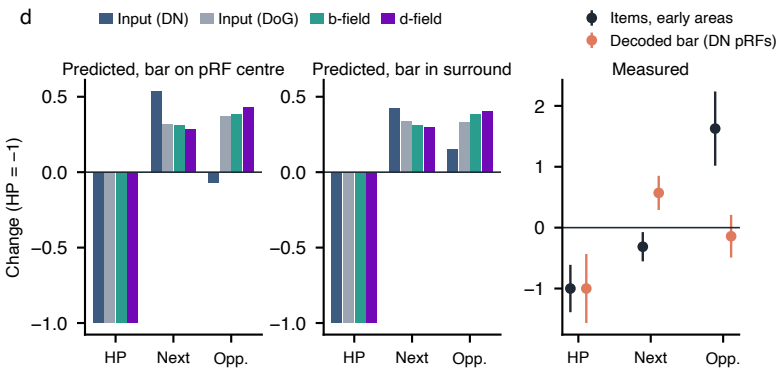
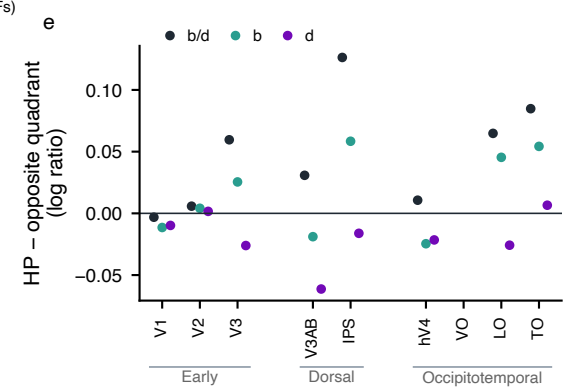
e