


CONVEYOR CHAINS

AS PER AMERICAN SOCIETY OF MECHANICAL ENGINEERS STANDARDS



CONTACT US

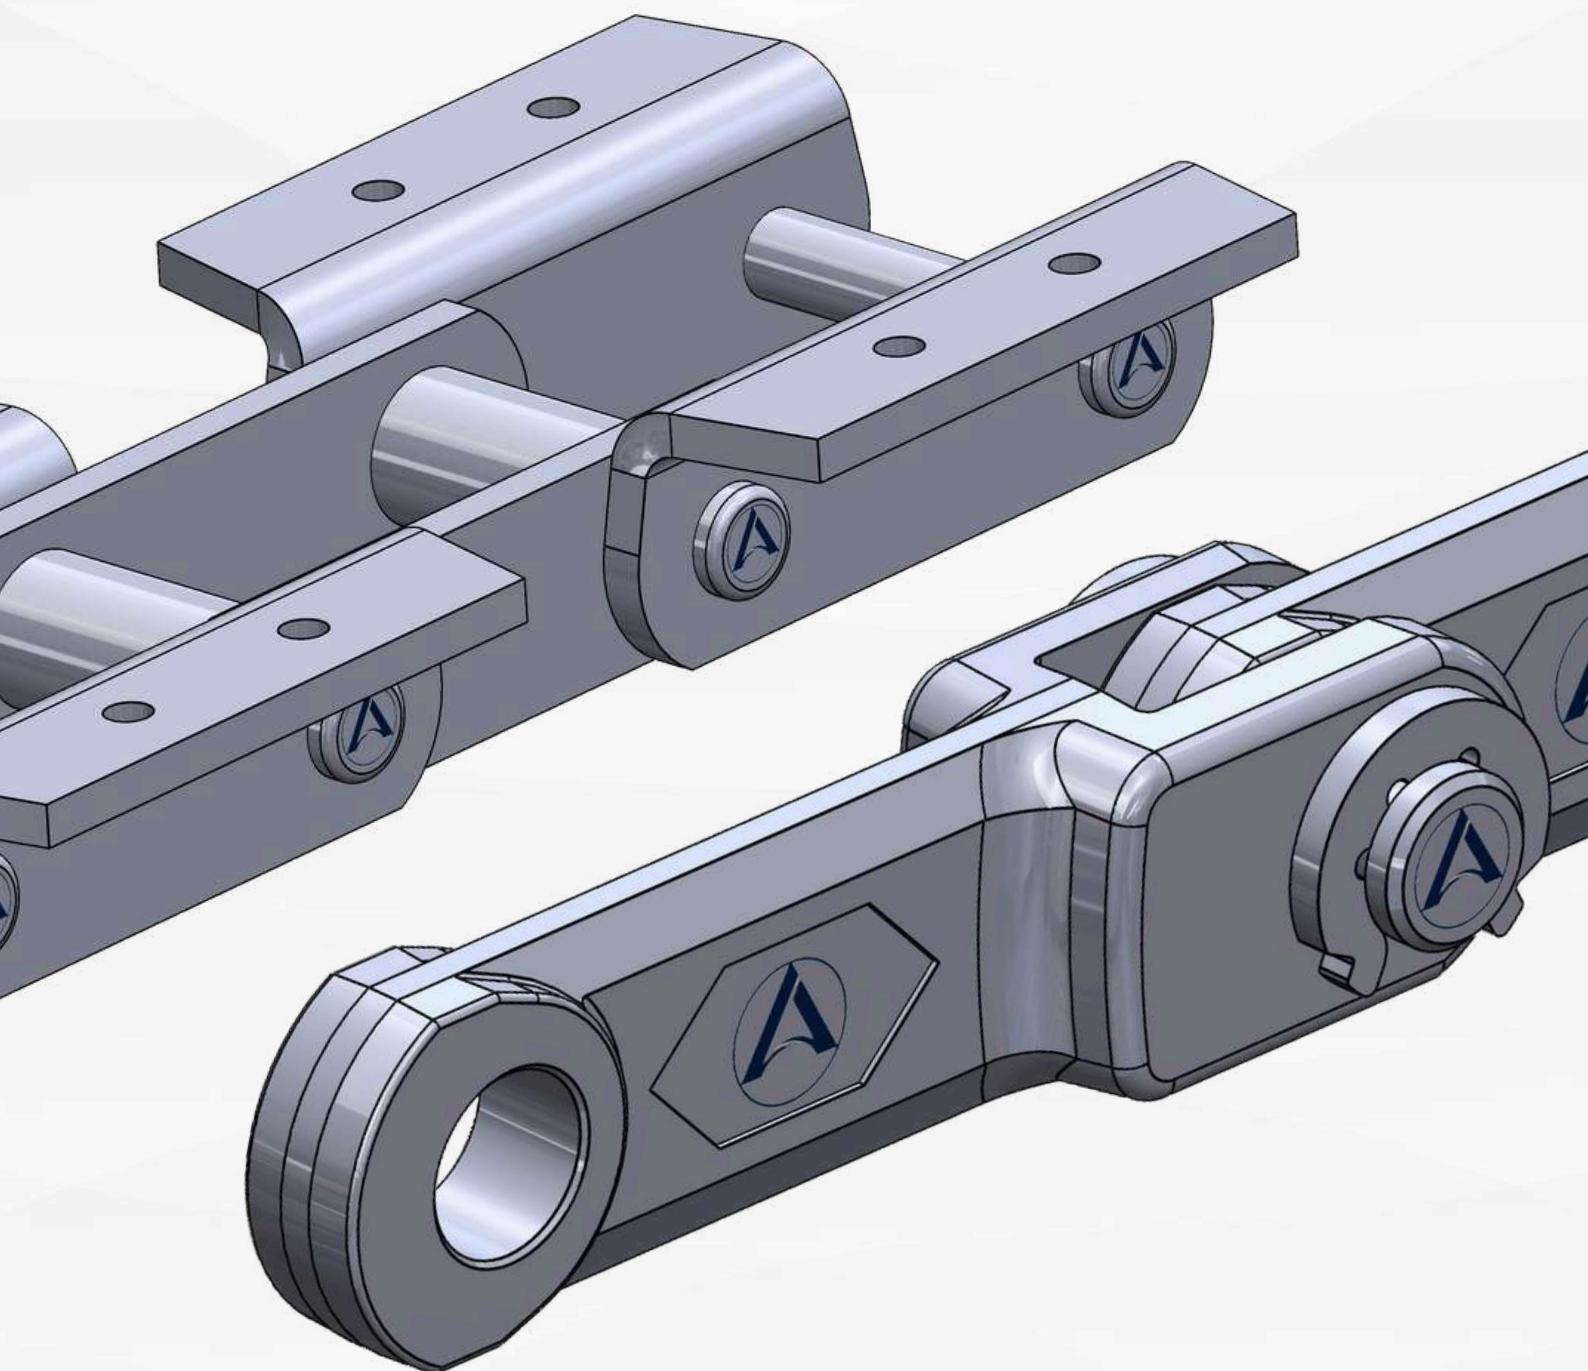

HIGH-STRENGTH WELDED STEEL CHAIN

AGAMUS AI & AUTOMATION, offering top-notch welded steel chains as per **ASME 29.200 Standard** for various industries. Our chains feature a welded construction, where barrels are seamlessly welded to the inside of the sidebars, ensuring a robust and economical solution for your needs.

Key Features:

Precision Welds: Our welded steel chains boast reinforced precision welds, offering durability and high strength.

Quality Alloys: Utilizing high-quality alloys, our chains are built to withstand the rigors of forestry, agriculture, municipalities, grain handling, cement industry, and a variety of medium to heavy-duty conveyors globally.

Diverse Applications: Commonly found in forestry, agriculture, and more, our welded steel chains are versatile and cater to a wide range of applications.

Corrosion Resistance: We offer stainless steel welded steel chains suitable for abrasive and corrosive applications.

OFFSET-SIDEBAR WELDED STEEL CHAIN:

The offset-sidebar style, ranging from WH78 to WH200, is a common and reliable choice. Each chain is designated with specific part numbers, ensuring you get the right style and manufacturing technique for your application.

Nomenclature

WR: Standard

WH: Standard with all components heat-treated.

WRHD: Heavy-duty welded steel chain

WHHD: Heavy-duty welded steel chain with all components heat-treated.

WRXHD: Extra heavy-duty welded steel chain

WHXHD: Extra heavy-duty welded steel chain with all components heat-treated.


Comprehensive Solutions:

Beyond welded steel chains, Agamus AI & Automation Ltd. provides a complete solution with sprockets, wear component, and more.

For inquiries, email our customer service team at sales@agamus.ca, and we'll be delighted to assist you

CONTACT US




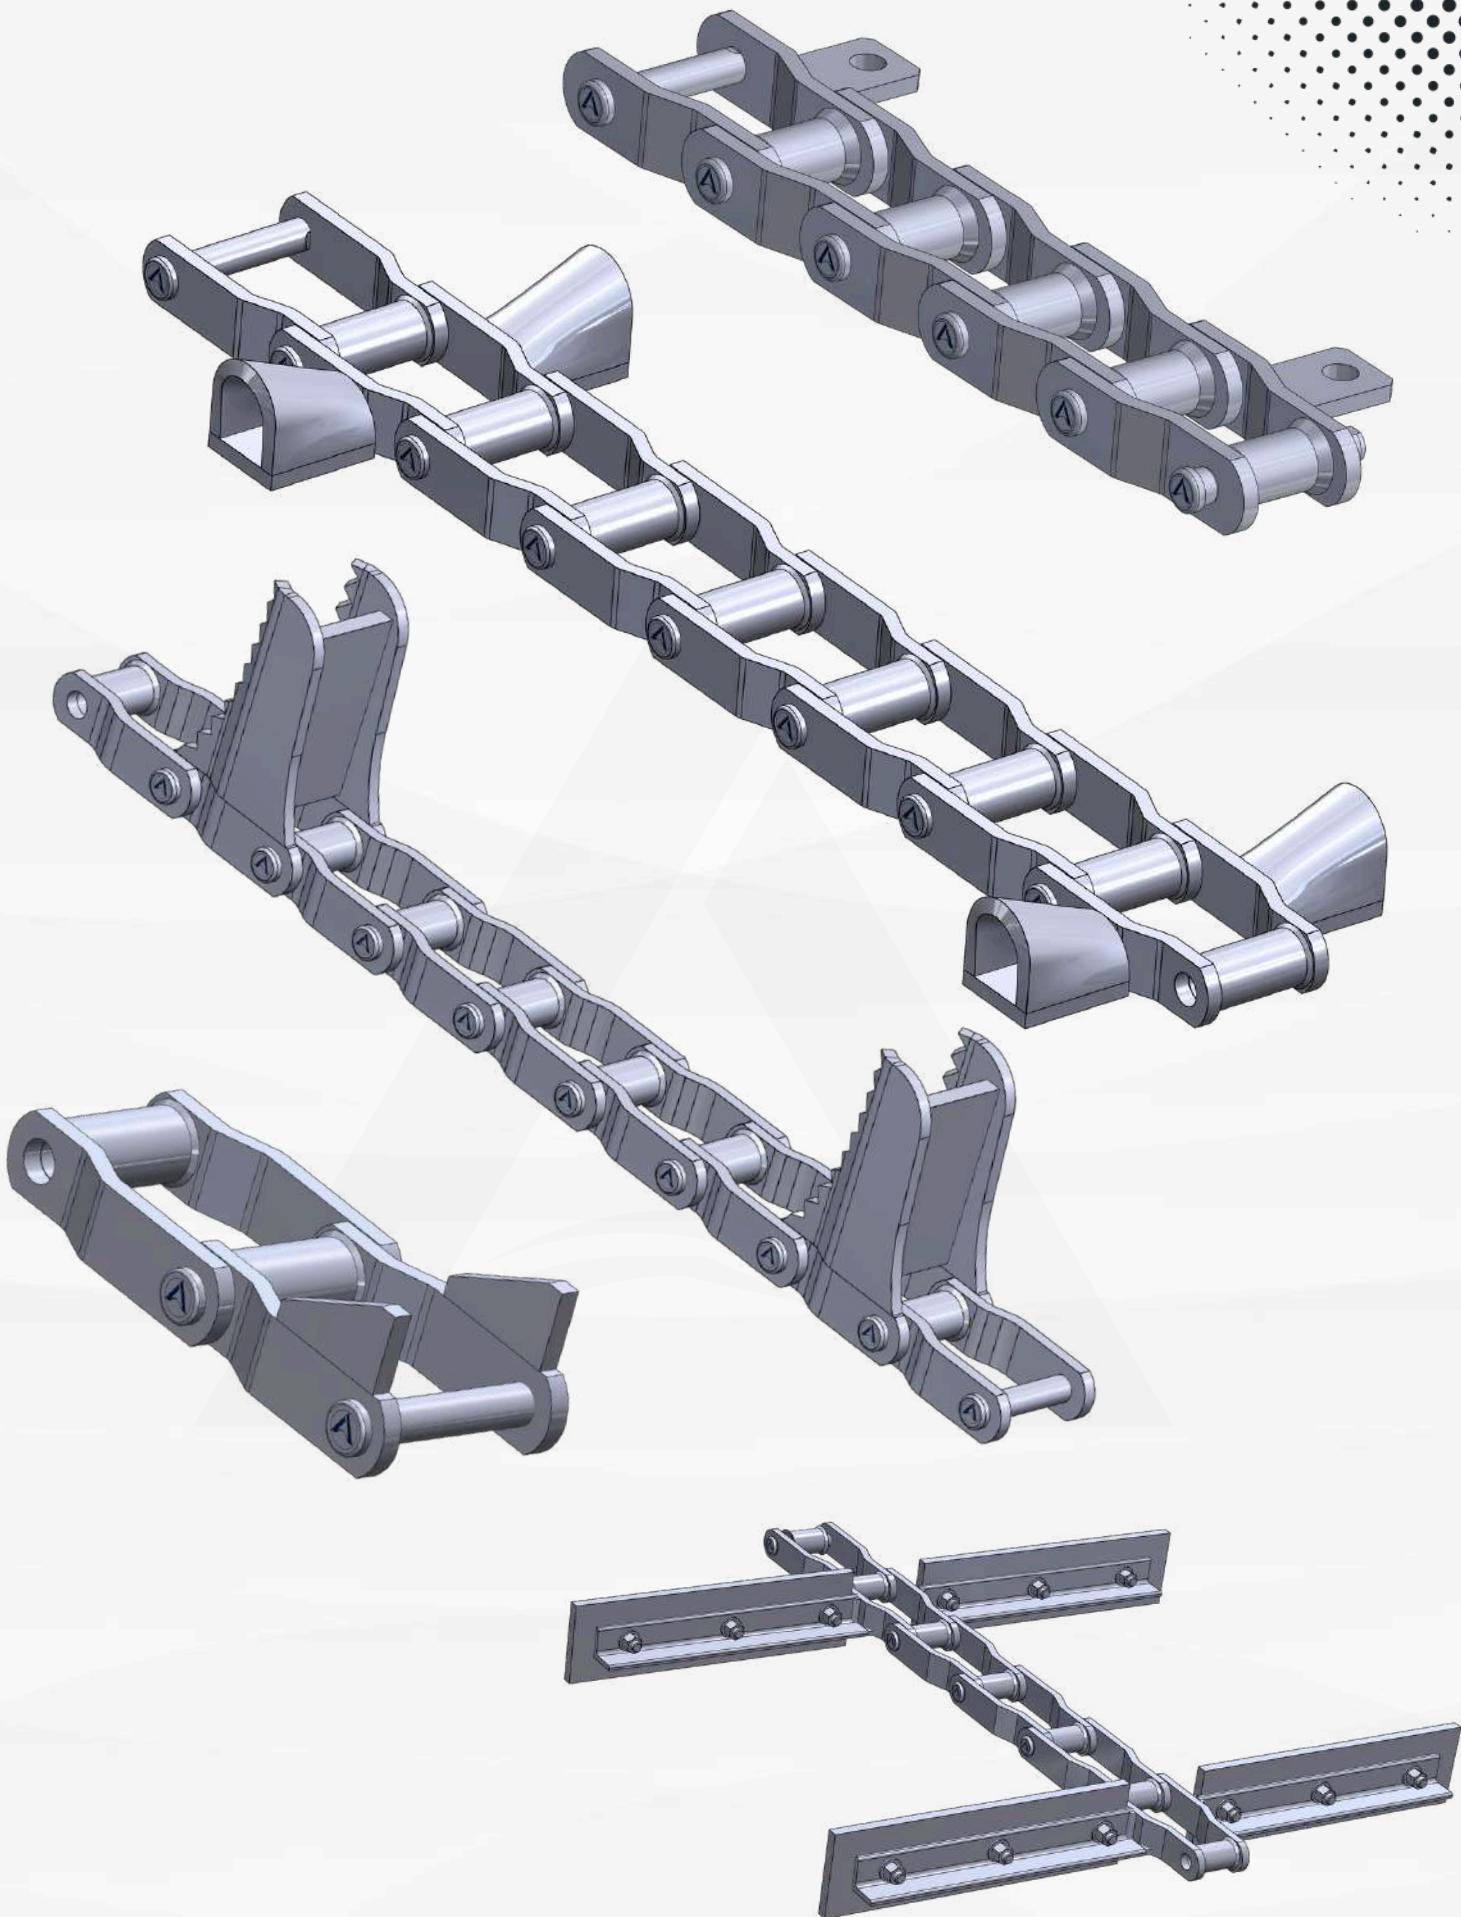

CONTACT US




DIMENSIONS AS PER ASME STANDARD

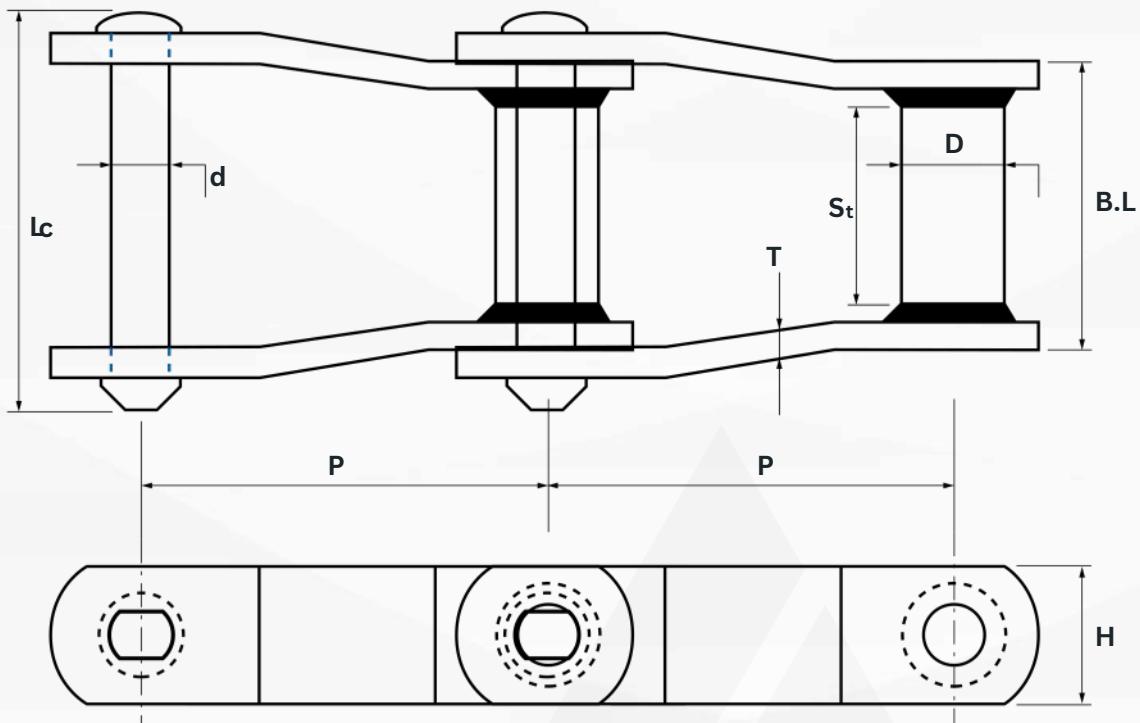

P	PITCH
D	BUSH DIAMETER
d	PIN DIAMETER
T	SIDE BAR THICKNESS
L_c	PIN LENGTH
S_t	MAX SPROCKET THICKNESS
H	SIDE BAR HEIGHT
B.L.	BEARING LENGTH



CHAIN NO	PITCH
WR78	2.609"
WH78	2.609"
WH78HD	2.636"
WH78XHD	2.640"
WR82	3.075"
WH82	3.075"
WH82XHD	3.075"
WR124	4.000"
WH124	4.000"
WH124XHD	4.050"
WR106	6.000"
WH106	6.000"
WH106HD	6.000"
WR110	6.000"
WH110	6.000"
WH106XHD	6.050"
WR132	6.050"
WH132	6.050"
WH132HD	6.050"
WH132XHD	6.050"
WR150	6.050"
WH150	6.050"
WH150HD	6.050"
WH150XHD	6.050"

DIFFERENT WELDED STEEL CHAIN ATTACHMENTS


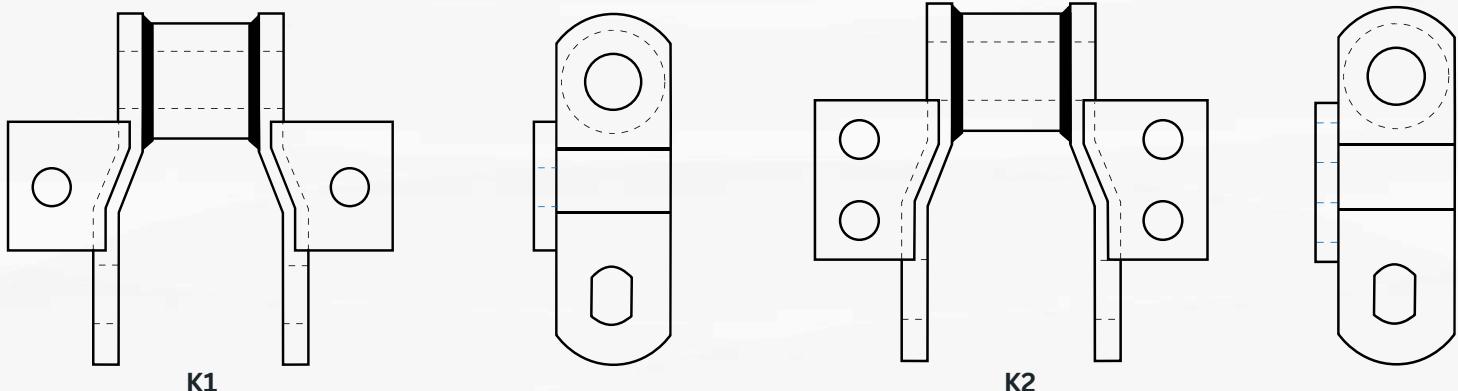


CONTACT US




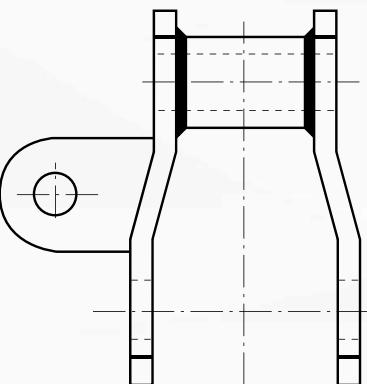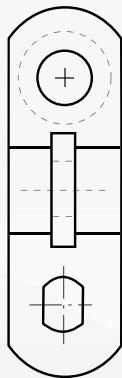


A22

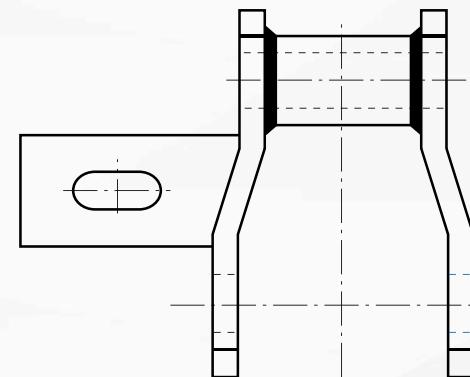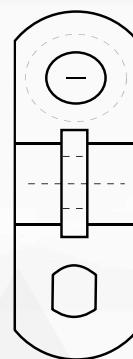


A22 (SLOTTED)

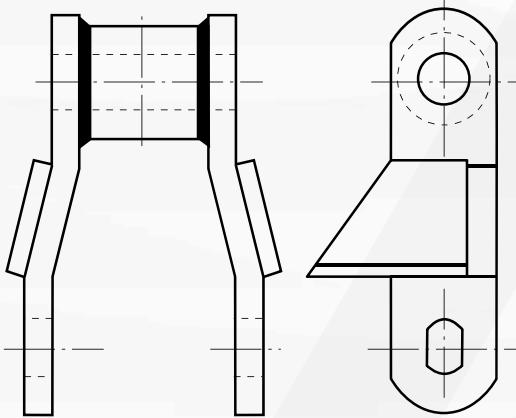


RR2

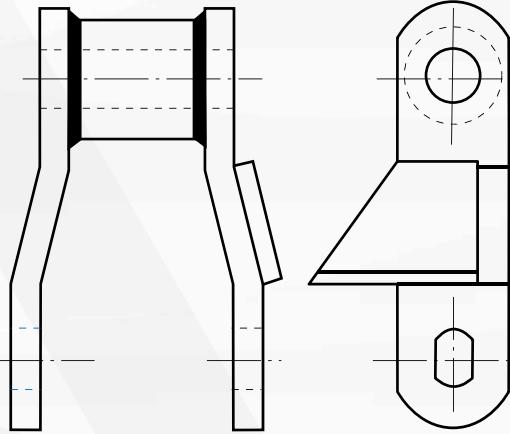

R2

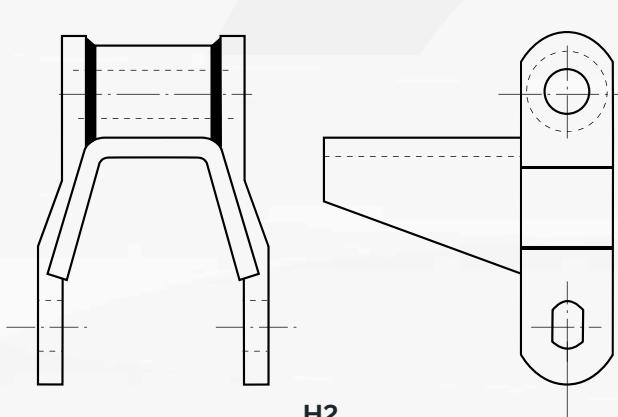



H2

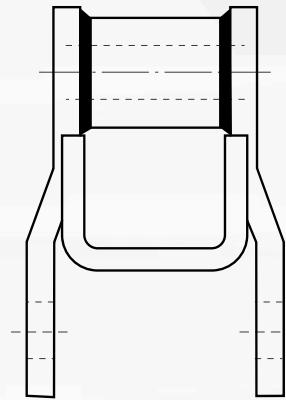



H1

CONTACT US





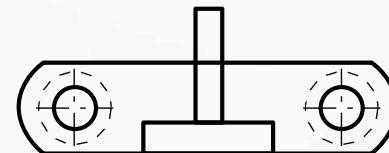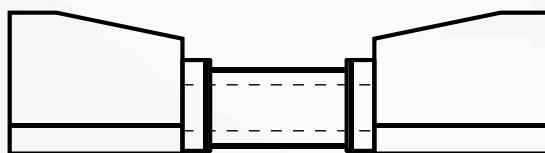

Style A

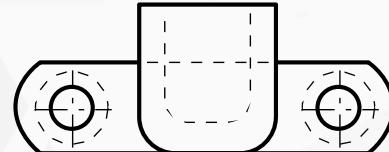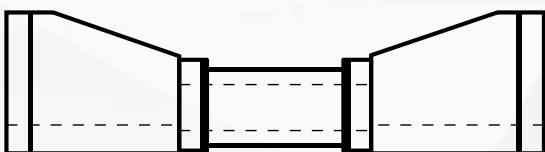


Style B

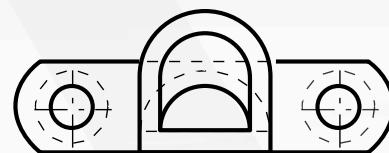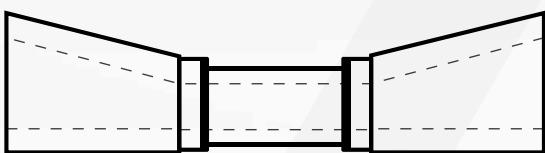

Style C


CRADLE ATTACHMENT

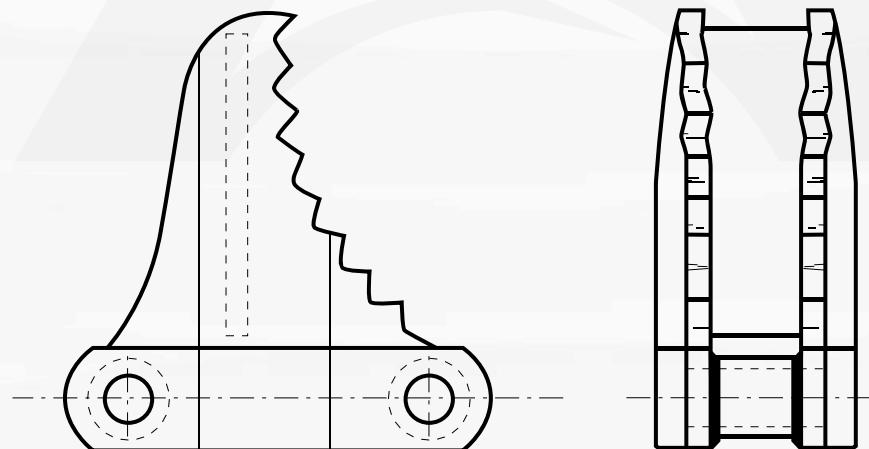



SLASHER ATTACHMENT

CONTACT US



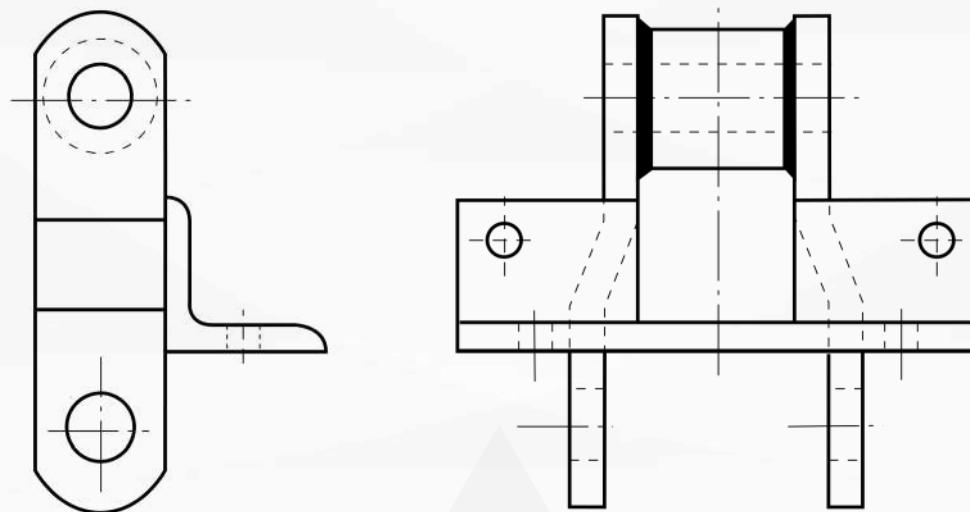



F4

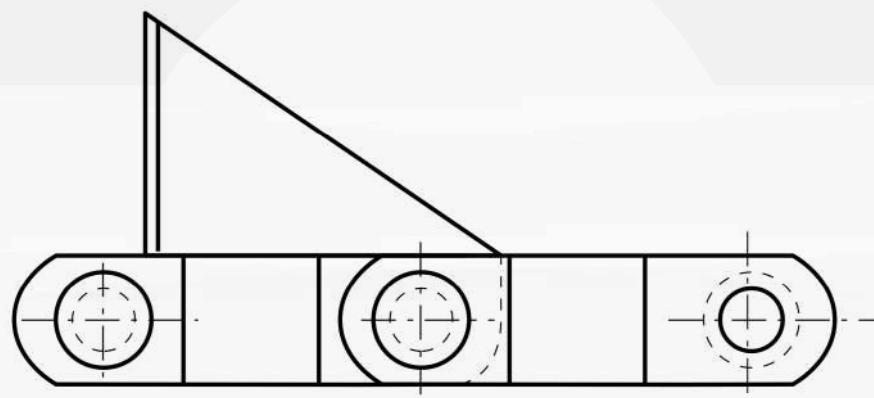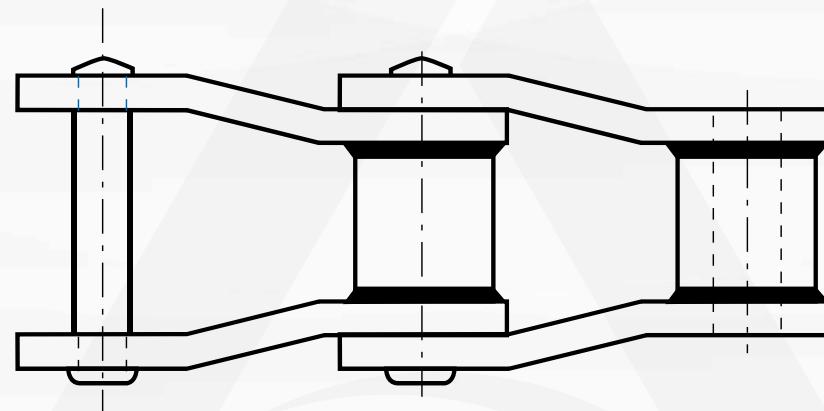



S1

CONTACT US



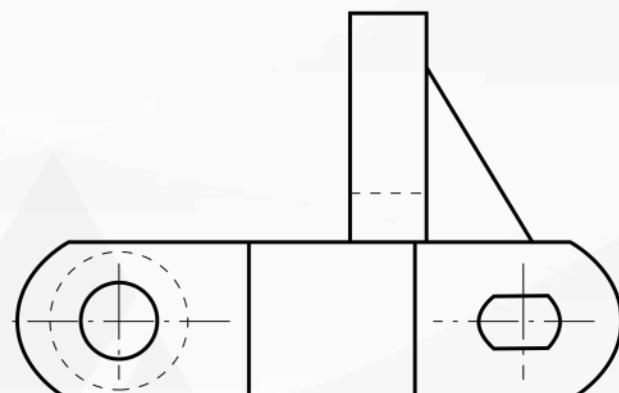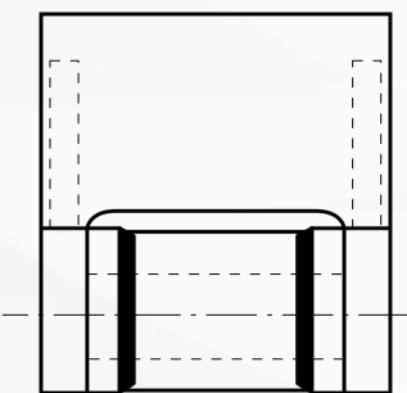

RF2

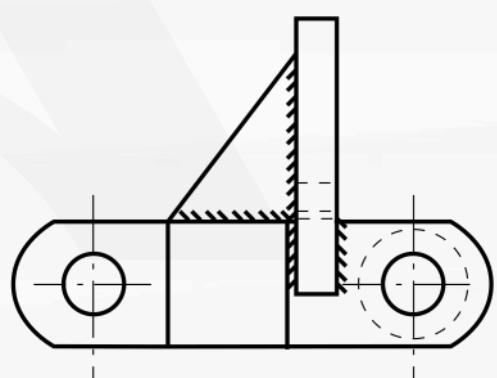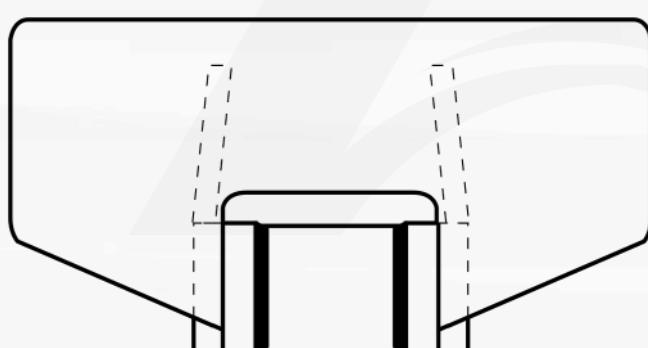

RF12

CONTACT US



WELDED STEEL CHAIN (C-TYPE OR STRAIGHT BARS)

Agamus AI & Automation Ltd., offer top-quality straight sidebar welded steel chains designed to meet the demands of robust industrial applications. Our meticulously crafted chains deliver unmatched strength and durability, ideal for various settings, including conveyors, hoists, and other industrial equipment.

Key Features:

- Construction: Stable platform with welded steel links and straight sidebars for heavy loads.
- Versatility: Available in various sizes and pitches for diverse applications.
- Material Options: Crafted from durable carbon steel, with corrosion-resistant choices.

Agamus AI & Automation Ltd., as your trusted supplier, provides straight sidebar welded steel chains for:

- **Material Handling:** Ideal for conveyors, elevators, and apron feeders.
- **Power Transmission:** Vital for driven systems, gearboxes, and assembly lines.
- **Agricultural Equipment:** Essential in harvesters, spreaders, and irrigation systems.
- **Forestry and Logging:** Trusted in Debarkers, skidders, and sawmills.
- **Waste Management:** Key for sorting conveyors, shredders, and compactors.

Nomenclature

WRC = Standard C-type Chain

WHC = Standard C-type Chain with all components heat-treated



WHC---XHD = Extra heavy-duty C-type Chain, welded steel, with all components heat-treated

C-type or Straight sidebar welded steel chains are ideal for heavy-duty conveyor applications. They are compatible with the same sprockets as offset welded steel chains and can operate in both directions. Additionally, these chains are available with attachments similar to those on offset welded chains, and we offer customized attachment options to meet your specific needs.

For more information or to discuss your requirements, please contact us at sales@agamus.ca. Below, you'll find the C-type chain size chart and part number nomenclature.

CONTACT US



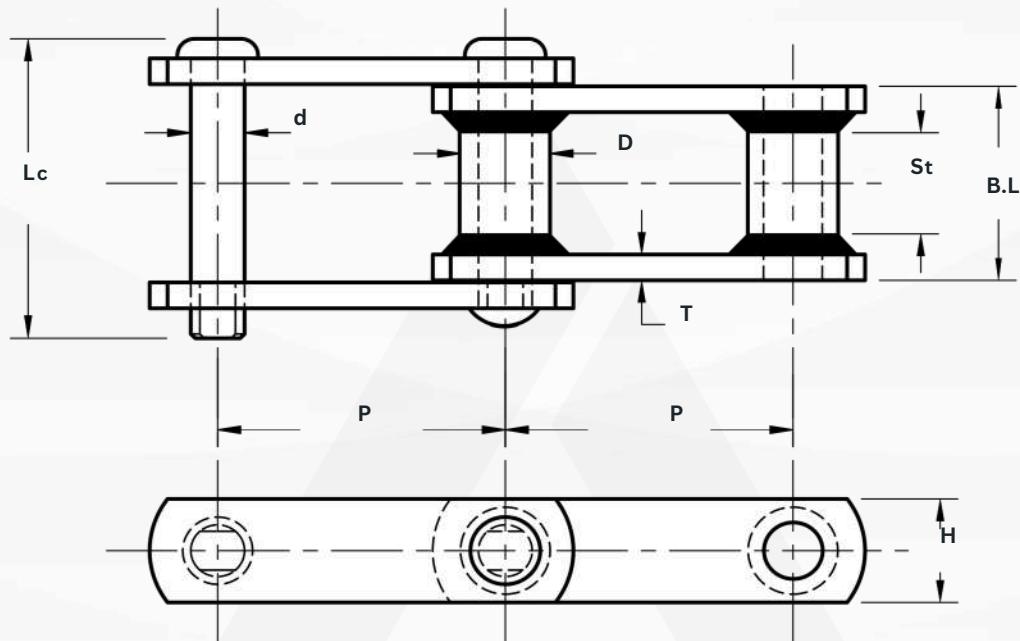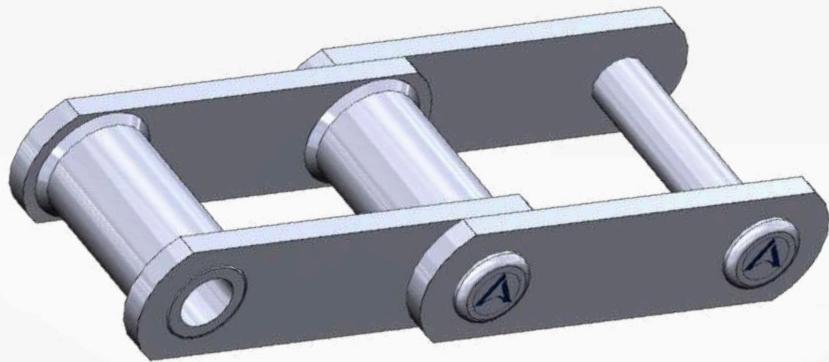


P	PITCH
D	BUSH DIAMETER
d	PIN DIAMETER
T	SIDE BAR THICKNESS
Lc	PIN LENGTH
St	MAX SPROCKET THICKNESS
H	SIDE BAR HEIGHT
B.L	BEARING LENGTH

CHAIN NO	P	H	T	d	Lc	B.L	St	D
WRC110	6.000"	1-1/2"	3/8"	3/4"	4-1/4"	2-13/16"	1-1/2"	1-1/4"
WHC110	6.000"	1-1/2"	3/8"	3/4"	4-1/4"	2-13/16"	1-1/2"	1-1/4"
WHC110XHD	6.050"	2.00"	1/2"	1.00"	4-7/8"	3.00"	1-1/2"	1.660"
WRC111	4.760"	1-3/4"	3/8"	3/4"	4-13/16"	3-3/8"	2.00"	1-1/4"
WHC111	4.760"	1-3/4"	3/8"	3/4"	4-13/16"	3-3/8"	2.00"	1-1/4"
WRC124	4.000"	1-1/2"	3/8"	3/4"	4-1/4"	2-13/16"	1-1/2"	1-1/4"
WHC124	4.000"	1-1/2"	3/8"	3/4"	4-1/4"	2-13/16"	1-1/2"	1-1/4"
WHC124XHD	4.050"	2.00"	1/2"	1.00"	4-7/8"	3.00"	1-1/2"	1.660"
WRC131	3.075"	1-1/2"	3/8"	3/4"	3-9/16"	2-1/8"	1-1/8"	1-1/4"
WHC131	3.075"	1-1/2"	3/8"	3/4"	3-9/16"	2-1/8"	1-1/8"	1-1/4"
WRC132	6.050"	2.00"	1/2"	1.00"	6-1/4"	4-7/16"	3-1/8"	1.660"
WHC132	6.050"	2.00"	1/2"	1.00"	6-1/4"	4-7/16"	3-1/8"	1.660"
WHC132XHD	6.050"	2.00"	5/8"	1.00"	6-3/4"	4-11/16"	3-1/8"	1.660"
WRC150	6.050"	2-1/2"	1/2"	1.00"	6-1/4"	4-7/16"	3-1/8"	1.660"
WHC150	6.050"	2-1/2"	1/2"	1.00"	6-1/4"	4-7/16"	3-1/8"	1.660"
WHC150XHD	6.050"	2-1/2"	5/8"	1.00"	6-3/4"	4.687"	3-1/8"	1.660"


CONTACT US




WELDED STEEL DRAG CHAIN

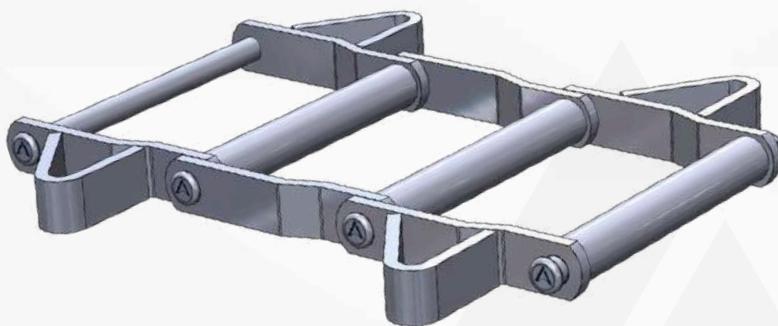

STANDARD BARREL WING ATTACHMENTS

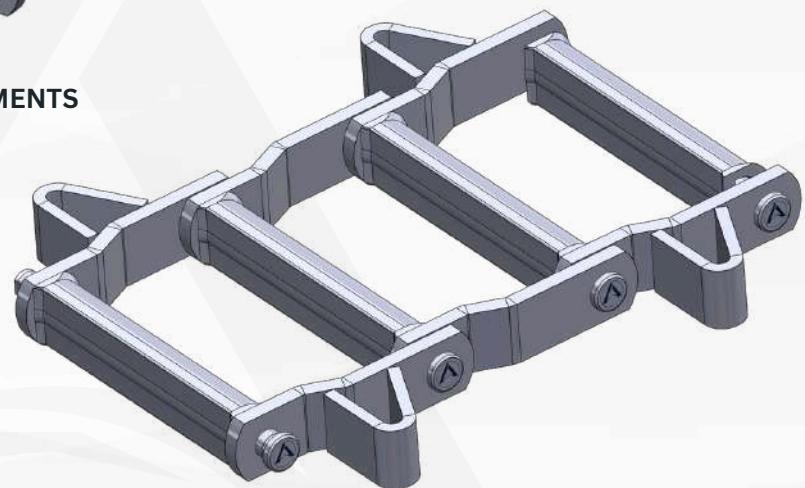

REVERSE BARREL & WING ATTACHMENTS

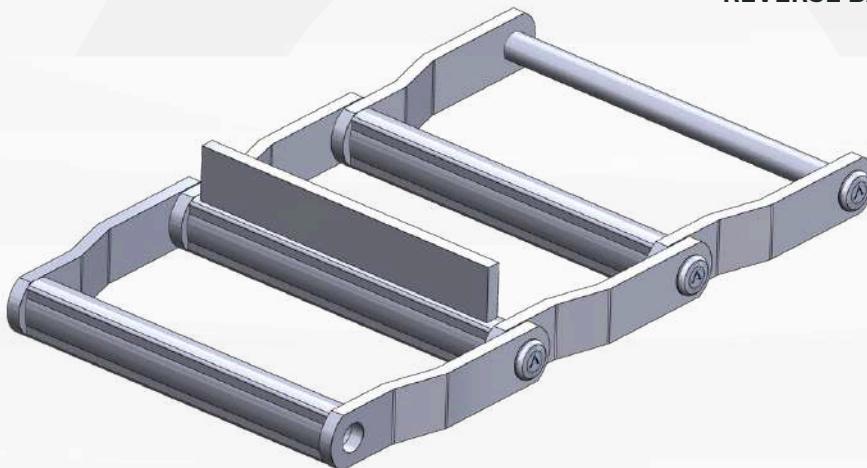

C-TYPE ATTACHMENT

DRAG CHAIN WITH ATTACHMENTS

CONTACT US



WELDED STEEL DRAG CHAIN

AGAMUS AI & AUTOMATION supplies a high-quality range of welded steel drag chains (**standard and Reverse Barrel**), featuring large carrying surfaces suitable for demanding applications such as grain handling, mining, forestry, and milling. Our chains adhere to both American and ISO standards, ensuring compatibility and seamless interchangeability with other brands and systems.

Key Features:

Durable Construction: Built for heavy-duty use, our drag chains offer reliable performance in challenging environments.

Versatile Applications: Suitable for a variety of applications, including grain handling, mining, forestry, and milling.

Standard Compliance: All chains conform to American and industry standards for easy integration with existing systems.

Nomenclature:

WD: Standard Drag Chain

WDH: Standard Drag Chain with Fully Heat-Treated Components


WDH---XHD: Extra Heavy-Duty Drag Chain with Fully Heat-Treated Components

Comprehensive Solutions:

In addition to drag chains, **Agamus AI & Automation Ltd.** provides a full range of solutions, including sprockets, wear components, and more.

For more information or to discuss your specific needs, please contact our customer service team at sales@agamus.ca. We look forward to assisting you.

P	PITCH
D	BUSH DIAMETER
d	PIN DIAMETER
T	SIDE BAR THICKNESS
Lc	PIN LENGTH
St	MAX SPROCKET THICKNESS
H	SIDE BAR HEIGHT
B.L	BEARING LENGTH

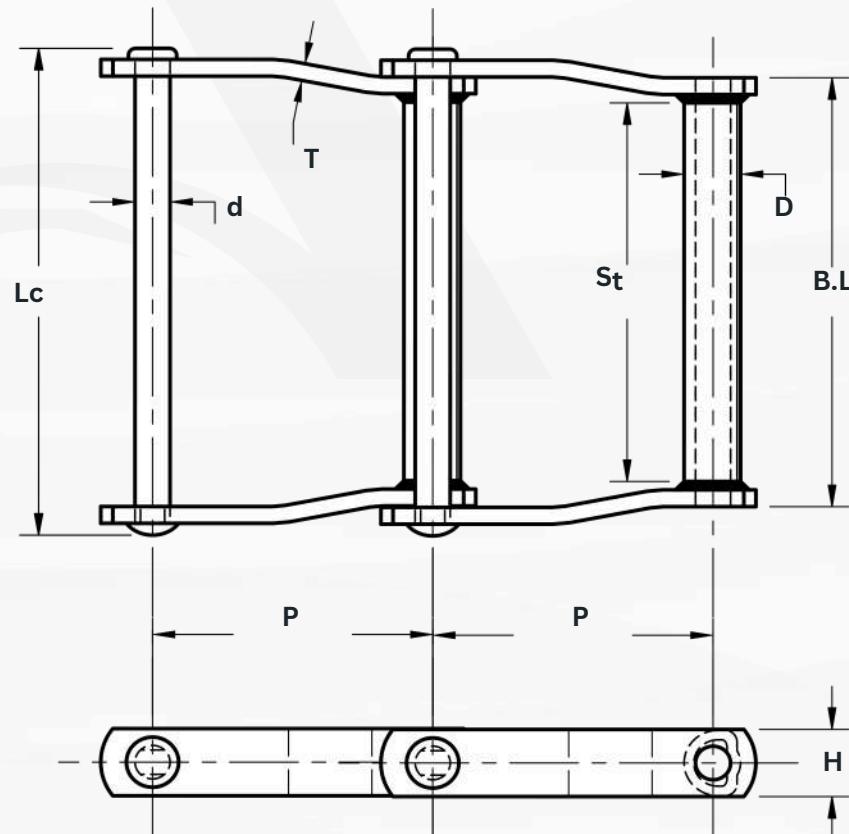


CONTACT US





CHAIN NO	P	H	T	d	Lc	B.L	St
WD102	5.00"	1-1/2"	3/8"	3/4"	9-1/4"	7-3/4"	6-3/8"
WDH102	5.00"	1-1/2"	3/8"	3/4"	9-1/4"	7-3/4"	6-3/8"
WD104	6.00"	1-1/2"	3/8"	3/4"	6-3/4"	5-3/8"	4-1/8"
WDH104	6.00"	1-1/2"	3/8"	3/4"	6-3/4"	5-3/8"	4-1/8"
WD110	6.00"	1-1/2"	3/8"	3/8"	11-3/4"	10-1/4"	9.00"
WDH110	6.00"	1-1/2"	3/8"	3/8"	11-3/4"	10-1/4"	9.00"
WD112	8.00"	1-1/2"	3/8"	3/4"	11-3/4"	10-1/4"	9.00"
WDH112	8.00"	1-1/2"	3/8"	3/4"	11-3/4"	10-1/4"	9.00"
WD116	8.00"	1-3/4"	3/8"	3/4"	15-1/2"	14-1/8"	13.00"
WDH116	8.00"	1-3/4"	3/8"	3/4"	15-1/2"	14-1/8"	13.00"
WD118	8.00"	2.00"	1/2"	7/8"	16-5/8"	14-7/8"	13-1/4"
WDH118	8.00"	2.00"	1/2"	7/8"	16-5/8"	14-7/8"	13-1/4"
WDH118XHD	8.00"	2.00"	5/8"	1.00"	17-3/8"	15-1/8"	13-1/4"
WD120	6.00"	2.00"	1/2"	7/8"	12.0"	10-1/4"	8-3/4"
WDH120	6.00"	2.00"	1/2"	7/8"	12.0"	10-1/4"	8-3/4"
WDH120XHD	6.00"	2.00"	5/8"	1.00"	12-3/4"	10-1/2"	8-3/4"
WD122	8.00"	2.00"	1/2"	7/8"	12.0"	10-1/4"	8-3/4"
WDH122	8.00"	2.00"	1/2"	7/8"	12.0"	10-1/4"	8-3/4"
WDH122XHD	8.00"	2.00"	5/8"	1.00"	12-3/4"	10-1/2"	8-3/4"
WD480	8.00"	2.00"	1/2"	7/8"	14-1/2"	12-3/4"	11.00"
WDH480	8.00"	2.00"	1/2"	7/8"	14-1/2"	12-3/4"	11.00"
WDH480XHD	8.00"	2.00"	5/8"	1.00"	15-1/4"	13.00"	11.00"
WD580	8.00"	2.00"	1/2"	1.00"	14.63"	12.10"	11.20"
WDH580	8.00"	2.00"	1/2"	1.00"	14.63"	12.10"	11.20"
WD680	8.00"	2.00"	10/16"	1.00"	15.33"	13.00"	11.20"
WDH680	8.00"	2.00"	10/16"	1.00"	15.33"	13.00"	11.20"

DRAG CHAIN ATTACHMENTS

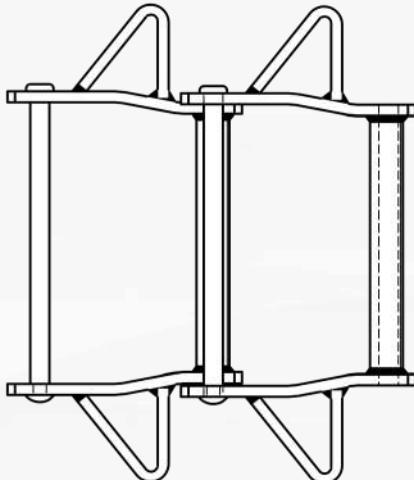

WING ATTACHMENTS

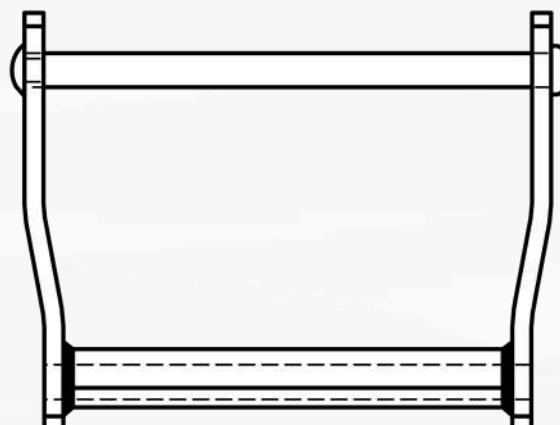
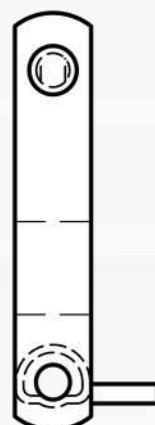


C- TYPE ATTACHMENT

CONTACT US



WELDED STEEL HEAVY DUTY CHAIN (WHX)

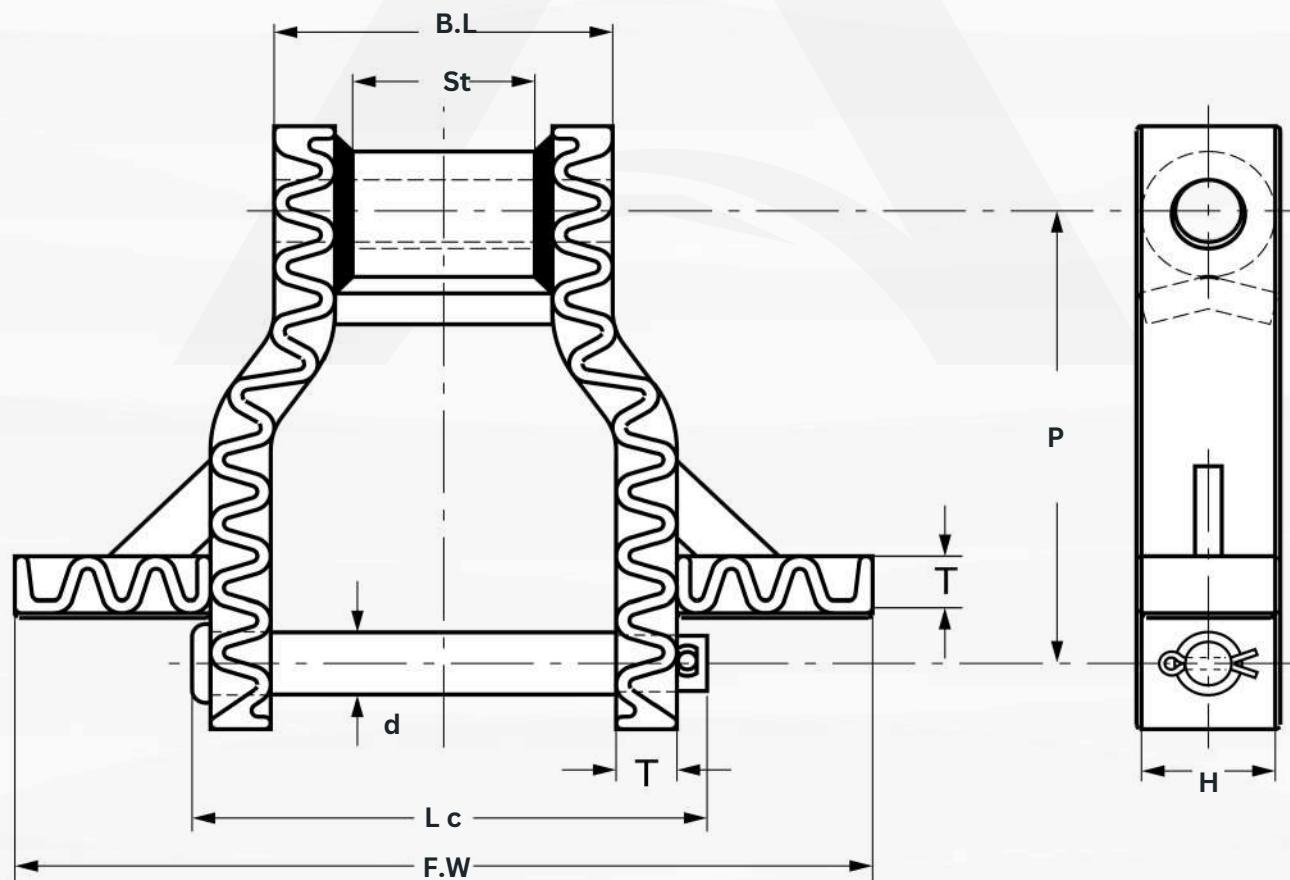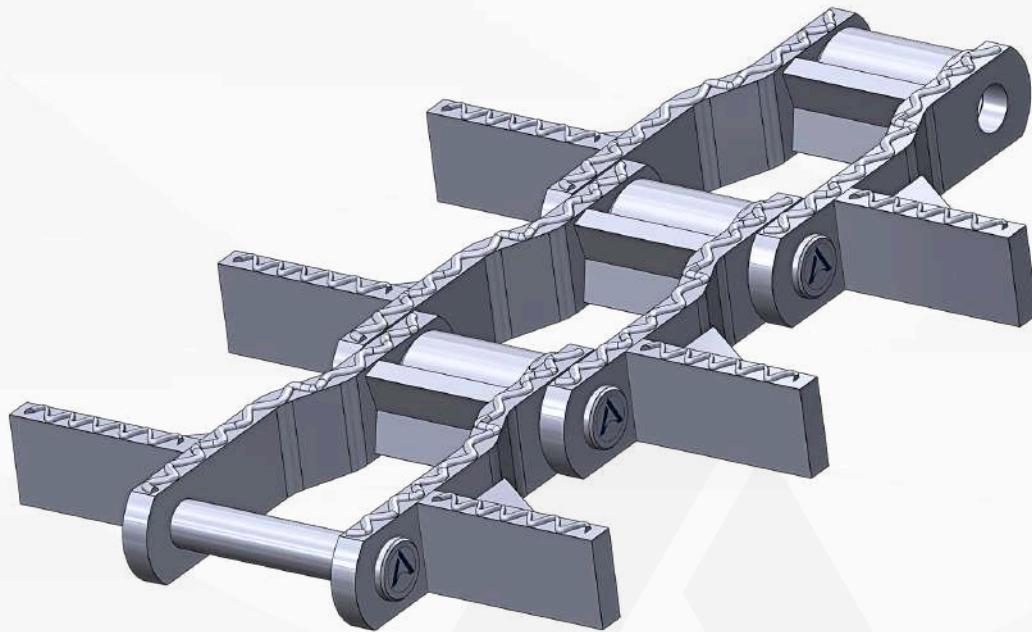

CONTACT US



WELDED STEEL HEAVY DUTY CHAIN (WHX)

Agamus AI & Automation Ltd. Supplies a premium range of high-strength welded steel drag chains, including the robust WHX chain. The WHX chain excels in demanding environments, featuring hardened surfaces, square edges, and induction-hardened pins to handle the most abrasive applications. These enhancements provide superior wear life and abrasion resistance.

Our chains deliver exceptional performance and durability for various applications such as grain handling, mining, forestry, and milling. We also offer face-hardening options on one or both sides to extend wear life and ensure long-lasting reliability.

Key Features:

High Strength: Our drag chains provide reliable performance in tough conditions.

Enhanced Durability: The WHX chain includes hardened surfaces, square edges, and induction-hardened pins for extended wear life and high abrasion resistance.

Versatile Applications: Suitable for a variety of applications, including grain handling, mining, forestry, and milling.

Standard Compliance: All chains meet American and ISO standards for seamless integration with existing systems.

Nomenclature:

WHX: Heavy-Duty Welded Drag Chain.

Comprehensive Solutions: In addition to drag chains, **Agamus AI & Automation Ltd.** offers a full line of high-quality WHX sprockets and other solutions, including wear components.

For more information or to discuss your specific requirements, please contact our customer service team at sales@agamus.ca. We look forward to assisting you.


P	PITCH
D	BUSH DIAMETER
d	PIN DIAMETER
T	SIDE BAR THICKNESS
Lc	PIN LENGTH
St	MAX SPROCKE THICKNESS
H	SIDE BAR HEIGHT
B.L	BEARING LENGTH
F.W	FACE WIDTH (8" -21")

CHAIN NO	P	Lc	St	d	D	H	T
WHX5157	6.05"	6.875"	3.000"	1.125"	1.75"	2.50"	0.625"
WHX6067	9.00"	8.190"	3.625"	1.250"	2.50"	2.50"	0.750"
WHX6267	9.00"	8.062"	3.630"	1.375"	2.50"	2.50"	0.750"
WHX5121	9.00"	9.873"	3.630"	1.125"	2.50"	2.50"	1.125"
WHX5221	9.00"	9.813"	3.630"	1.375"	2.50"	2.50"	1.125"
WHX6121	9.00"	9.750"	3.630"	1.250"	2.50"	2.50"	1.125"
WHX6221	9.00"	9.813"	3.630"	1.375"	2.50"	2.50"	1.125"

CONTACT US



STEEL BUSHED WITHOUT ROLLER CHAIN

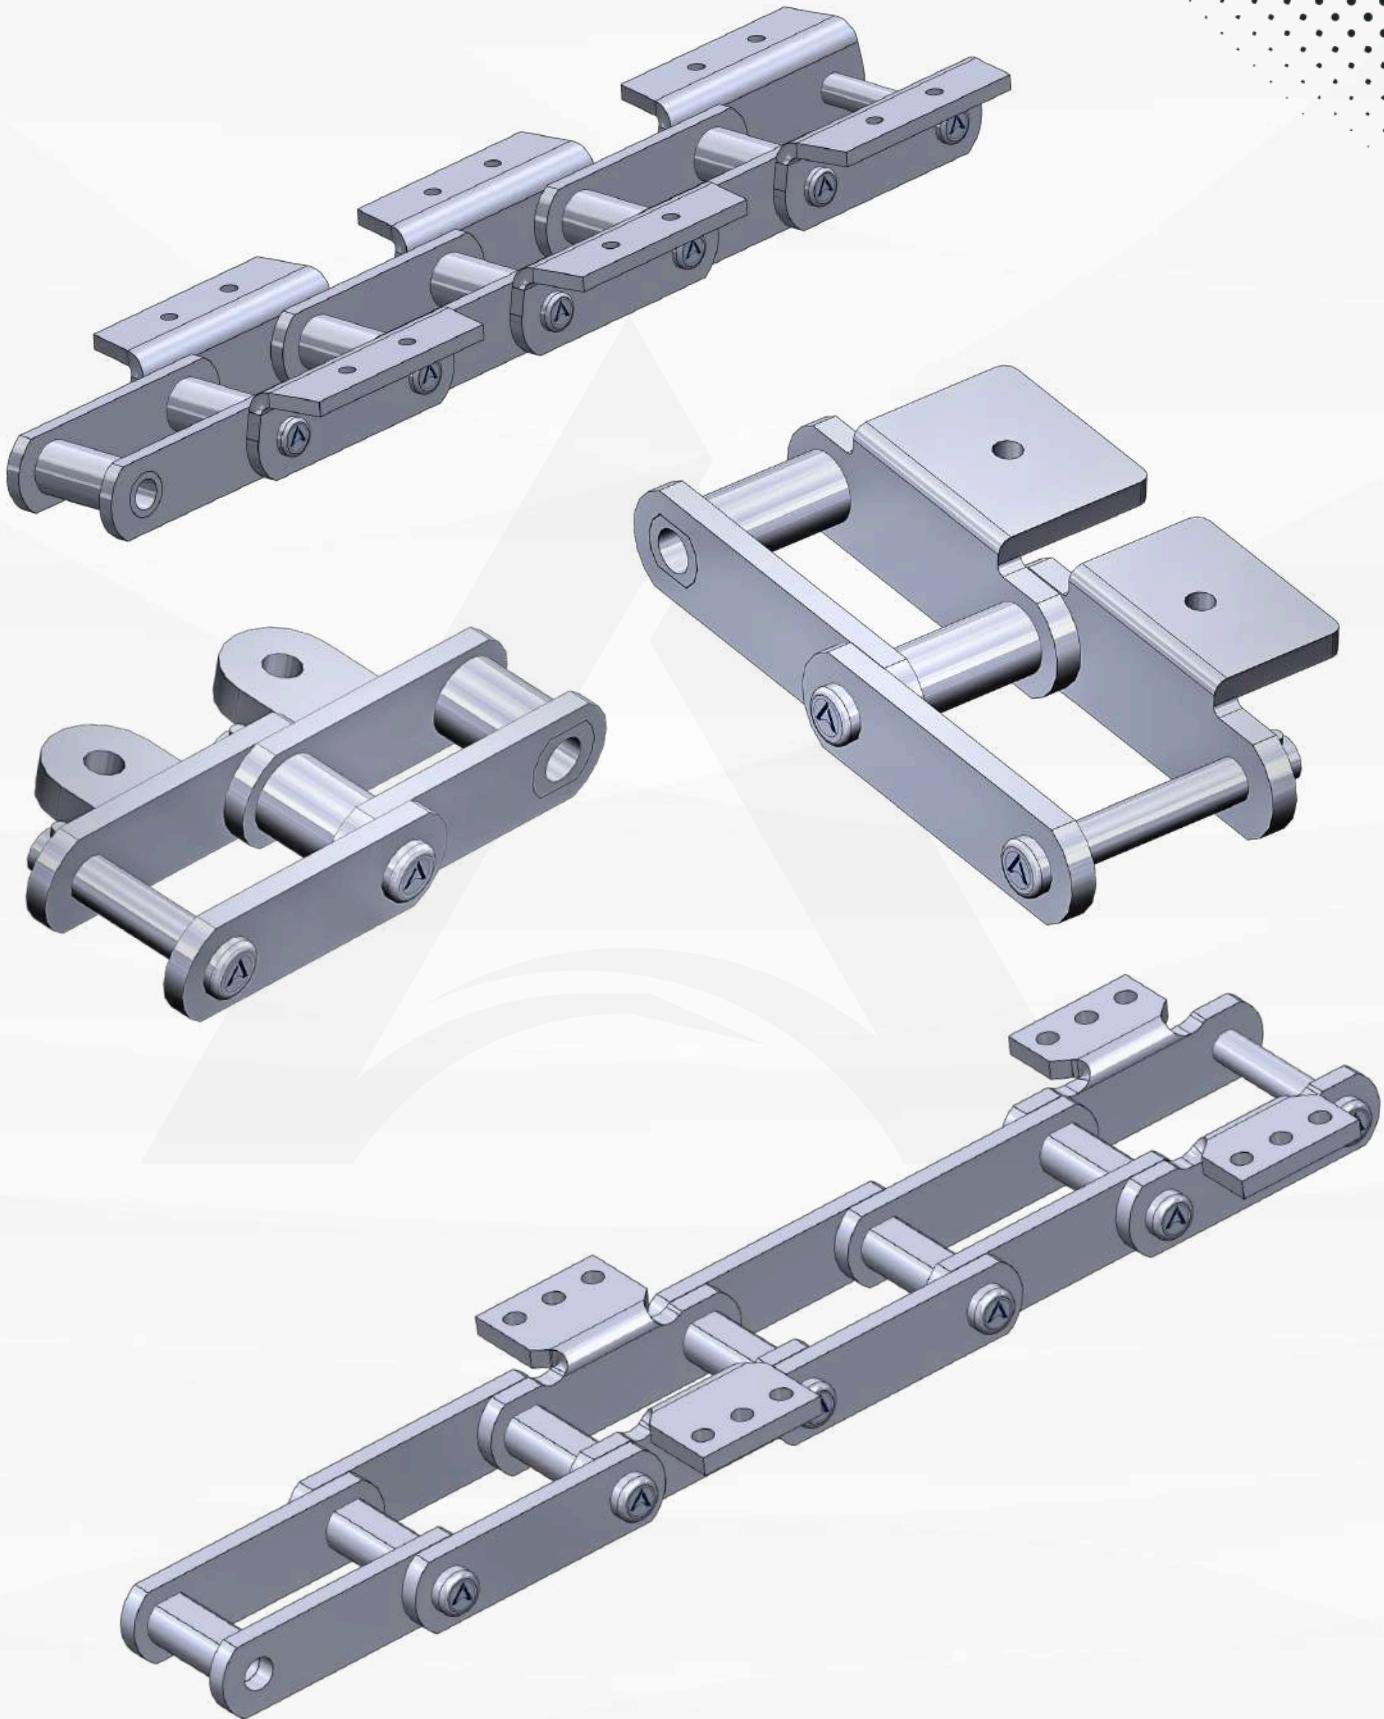

CONTACT US



STEEL BUSHED WITHOUT ROLLER CHAIN

Agamus AI & Automation Ltd. supplies a premium range of high-strength steel bushed chains as per **ASME** standard ideal for demanding applications such as asphalt, lumber, sugar mills, and elevating systems. Our steel bushed chains are sourced to meet American Standards, offering superior strength and durability compared to other suppliers.

We offer two variations of steel bushed chains: straight bar (**S.B**) and offset style (**O.S**). Each variation is designed to meet specific application needs and ensure optimal performance.

Key Features:

High Strength: Our steel bushed chains deliver reliable performance in challenging environments.

Enhanced Durability: Sourced to meet American Standards, ensuring superior strength and longevity.


Versatile Applications: Suitable for asphalt, lumber, sugar mills, and elevating systems.

Two Variations: Available in straight bar and offset styles to suit various application requirements.

Standard Compliance: All chains conform to American Standards for seamless integration with existing systems.

Comprehensive Solutions: In addition to steel bushed chains, Agamus AI & Automation Ltd. offers a full range of high-quality sprockets and other solutions, including wear components.



For more information or to discuss your specific requirements, please contact our customer service team at sales@agamus.ca. We look forward to assisting you.

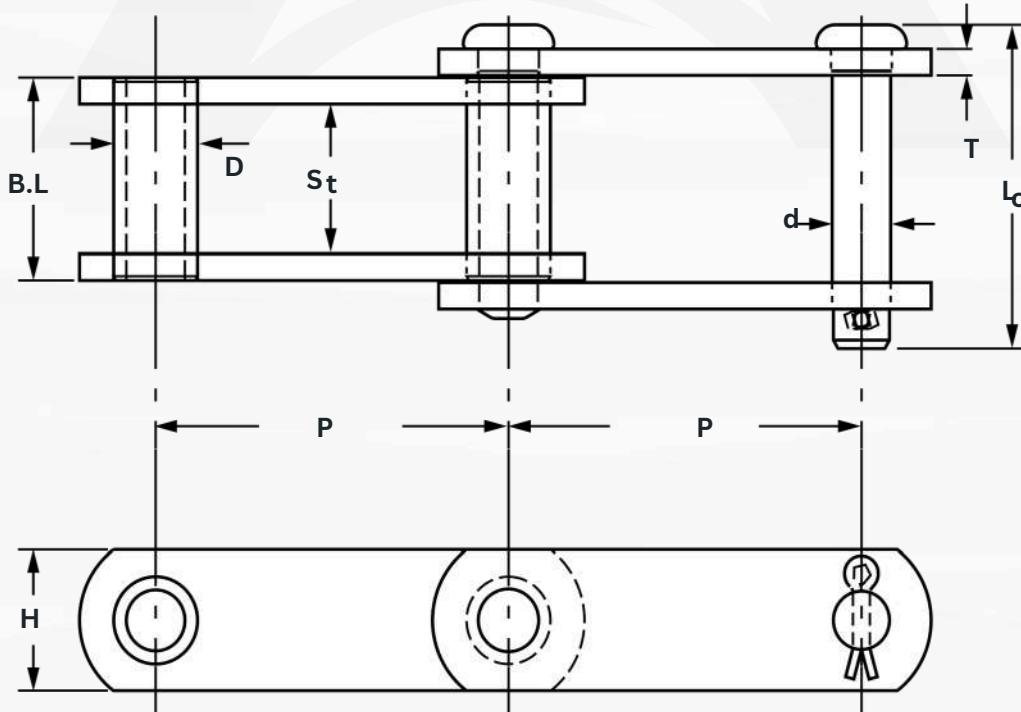

S.B STYLE

CONTACT US



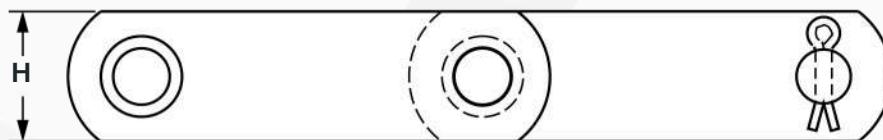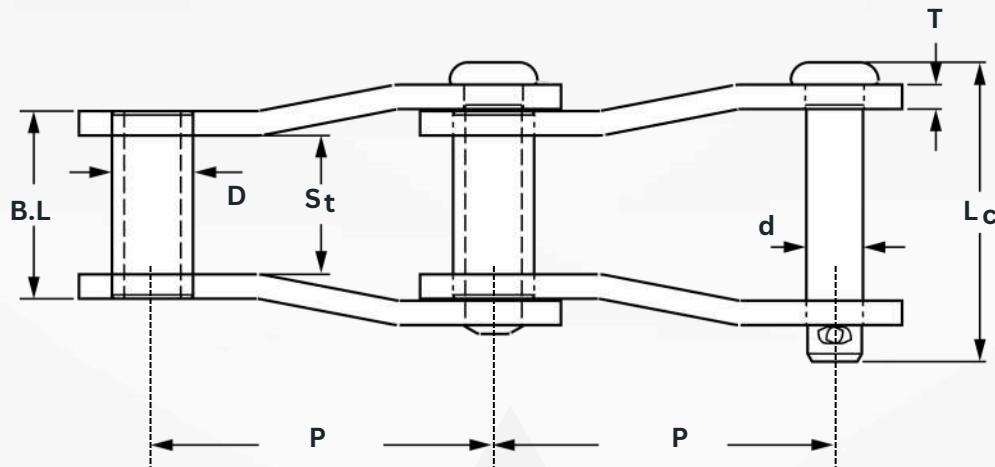

O.S STYLE


P	PITCH
D	BUSH DIAMETER
d	PIN DIAMETER
T	SIDE BAR THICKNESS
Lc	PIN LENGTH
St	MAX SPROCKE THICKNESS
H	SIDE BAR HEIGHT
B.L	BEARING LENGTH

CHAIN NO	STYLE	P	Lc	T	H	B.L	D	St	d
SS188	S.B	2.61"	2.69"	1/4 "	1 1/8 "	1 9/16"	7/8 "	1 1/16"	1/2 "
SS131	S.B	3.08"	3.52"	3/8 "	1 1/2 "	2 1/16"	1 1/4 "	1 5/16"	5/8 "
SS825	O.S	4.00"	3.87"	3/8 "	2"	2 5/16"	1 1/8 "	1 9/16"	3/4 "
SS102B	S.B	4.00"	4.37"	3/8 "	1 1/2 "	2 7/8 "	1"	2 1/8 "	5/8 "
SS102.5	S.B	4.04"	4.56"	3/8 "	1 3/4 "	3"	1 3/8 "	2 1/4 "	3/4 "
111	S.B	4.76"	4.97"	3/8 "	2"	3 3/8 "	1 7/16"	2 5/8 "	3/4 "
110	S.B	6.00"	4.37"	3/8 "	1 1/2 "	2 7/8 "	1 1/4 "	2 1/8 "	5/8 "
833	S.B	6.00"	4.97"	3/8 "	2"	3 3/8 "	1 7/16"	2 5/8 "	3/4 "
844	O.S	6.00"	5.31"	1/2 "	2"	3 1/2 "	1 3/16"	2 1/2 "	3/4 "
856	S.B	6.00"	5.99"	1/2 "	2 1/2 "	4"	1 3/4 "	3"	1"
956	S.B	6.00"	5.99"	1/2 "	3"	4"	1 3/4 "	2 15/16"	1"
857	S.B	6.00"	5.99"	1/2 "	3 1/4 "	4"	1 3/4 "	3"	1"
958	S.B	6.00"	6.07"	9/16"	3 1/4 "	4 1/8 "	2"	3"	1 1/8 "
859	S.B	6.00"	7.62"	5/8 "	4"	5"	2 3/8 "	3 3/4 "	1 1/4 "
6150	S.B	6.05"	6.36"	1/2 "	2 1/2 "	4 3/8 "	1 3/4 "	3 5/16"	1"
864	S.B	6.05"	7.62"	5/8 "	4"	5"	2 3/8 "	3 3/4 "	1 1/4 "
984	S.B	7.00"	7.35"	5/8 "	4"	5"	2 1/2 "	3 3/4 "	1 3/8 "
886	O.S	7.00"	6.79"	3/4 "	4"	4 1/4 "	2 5/8 "	2 3/4 "	1 5/8 "
4671	S.B	9.00"	6.21"	1/2 "	3"	4 3/8 "	1 3/4 "	3 3/8 "	1"


CONTACT US





STEEL BUSHED CHAIN WITH ATTACHMENTS

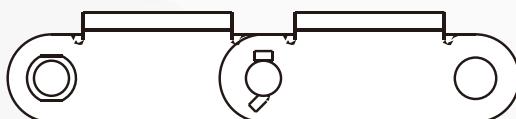

A1

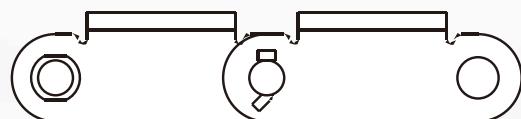



K1

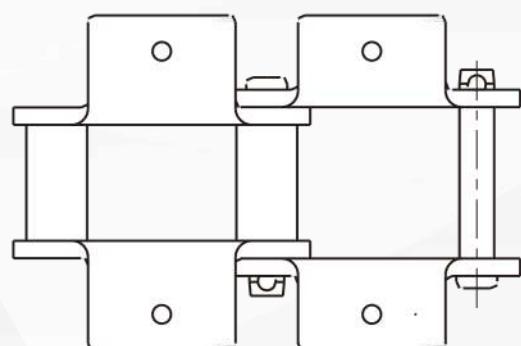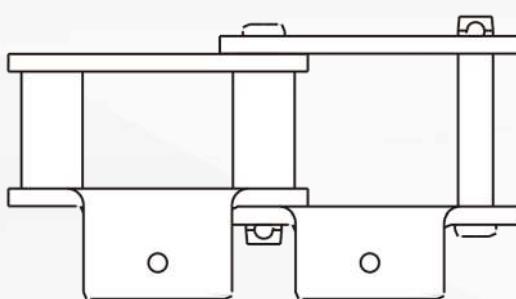

K2




A2

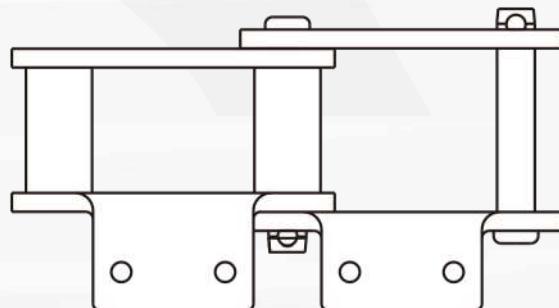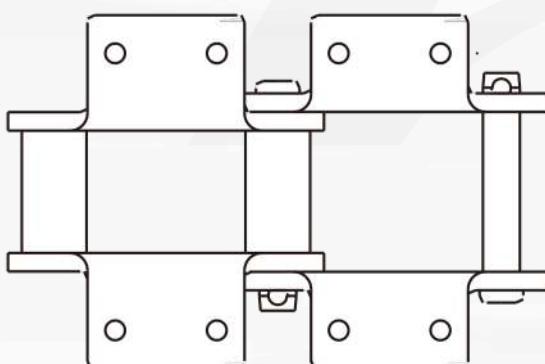


CONTACT US





STEEL BUSHED CHAIN WITH ATTACHMENTS

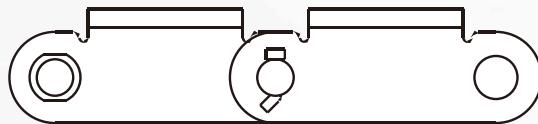


K3

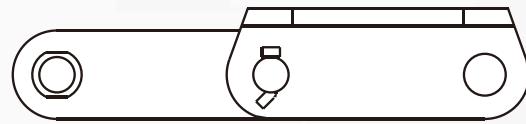

K35

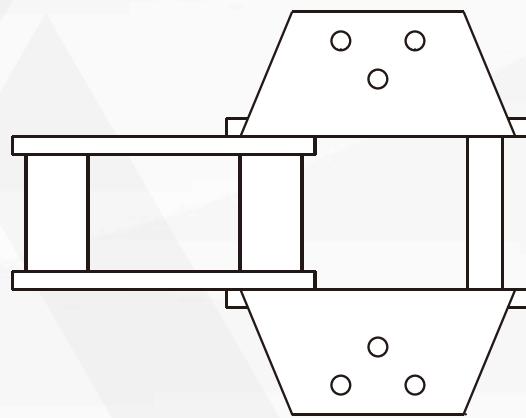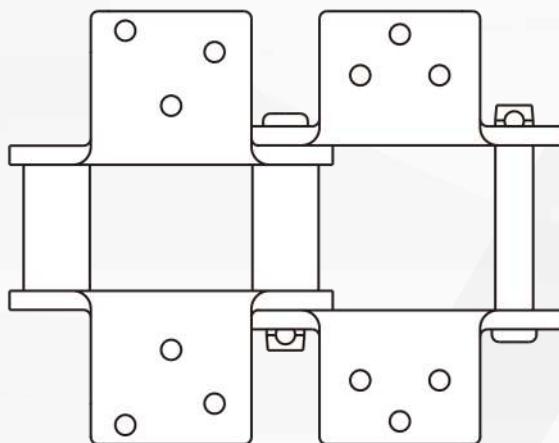


A22

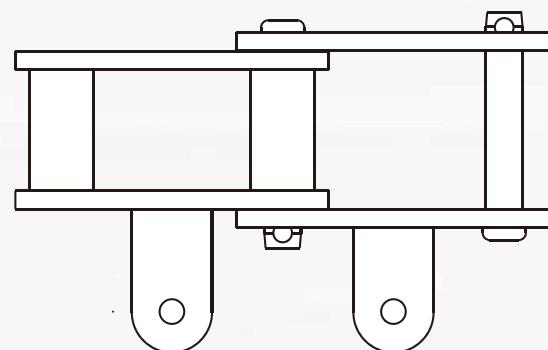

CONTACT US





STEEL BUSHED CHAIN WITHOUT ROLLERS

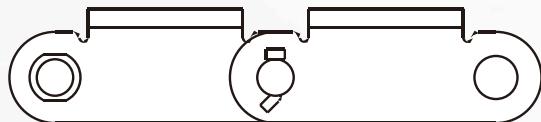


K3



K35

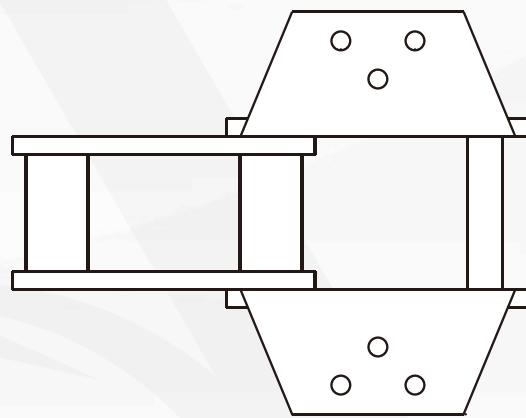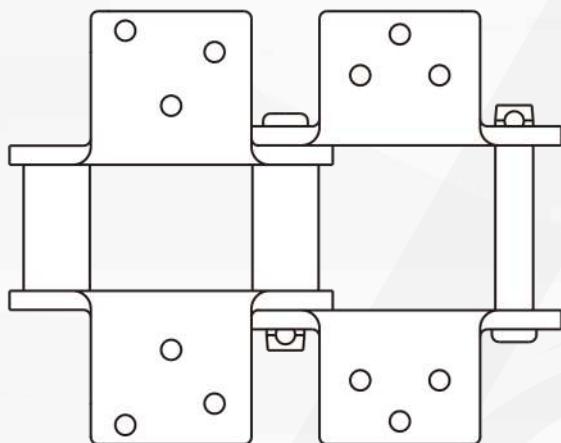

A22

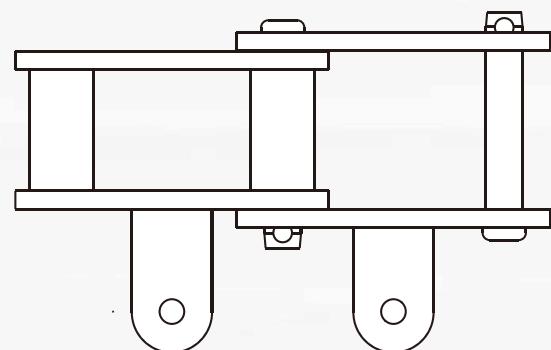

CONTACT US



STEEL BUSHED CHAIN WITH ROLLER



CONTACT US



STEEL BUSHED CHAIN WITH ROLLER

Agamus AI & Automation Ltd. supplies a premium range of high-strength steel bushed chains with rollers as per **ASME B29.15M**, **DIN 8165** & **DIN 8167**, ideal for demanding applications such as conveyors, elevators, and heavy-duty service environments. Our steel bushed roller chains are sourced to meet American Standards, offering superior strength and durability compared to other suppliers.

We offer two variations of steel bushed chains: straight bar (S.B) and offset style (O.S). Each variation is designed to meet specific application needs and ensure optimal performance.

Key Features:

High Strength: Our steel bushed roller chains deliver reliable performance in challenging environments.

Enhanced Durability: Manufactured to meet American Standards, ensuring exceptional strength and longevity.

Versatile Applications: Suitable for use in bucket elevators, flight conveyors, and scraper conveyors.



Two Variations: Available in straight bar and offset styles to accommodate diverse application requirements.

Standard Compliance: All chains conform to American Standards for seamless integration with existing systems.


Comprehensive Solutions:

In addition to steel bushed roller chains, **Agamus AI & Automation Ltd.** offers a full range of high-quality sprockets and other solutions, including wear components.


For more information or to discuss your specific requirements, please contact our customer service team at sales@agamus.ca. We look forward to assisting you!

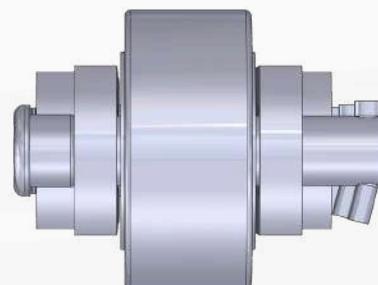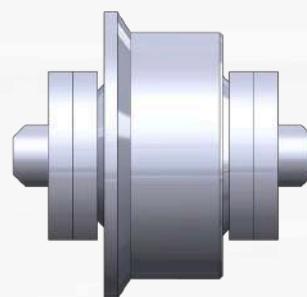**STYLE -A****STYLE -B****STYLE -C****STYLE -D****CONTACT US**

STEEL BUSHED CHAIN WITH ROLLER

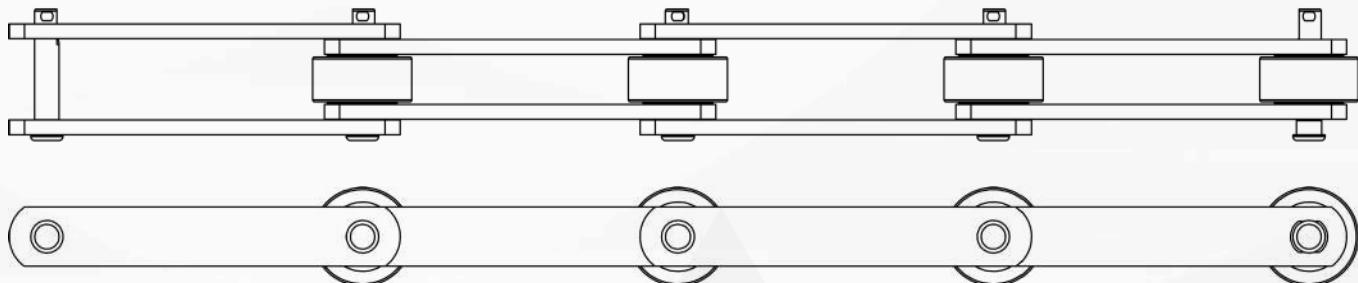

STRAIGHT BAR TYPE


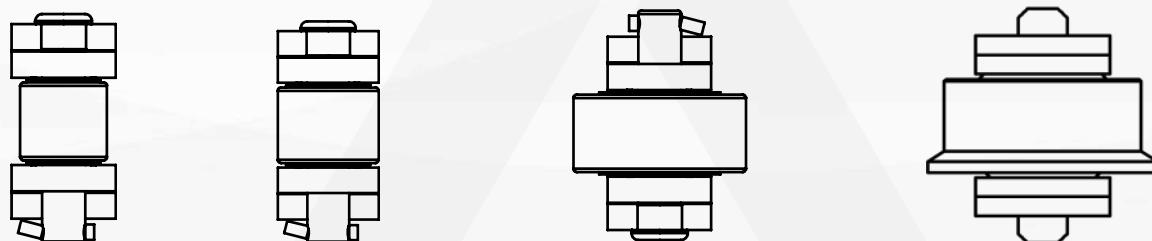


STYLE -A

STYLE -B

STYLE -C

STYLE -D





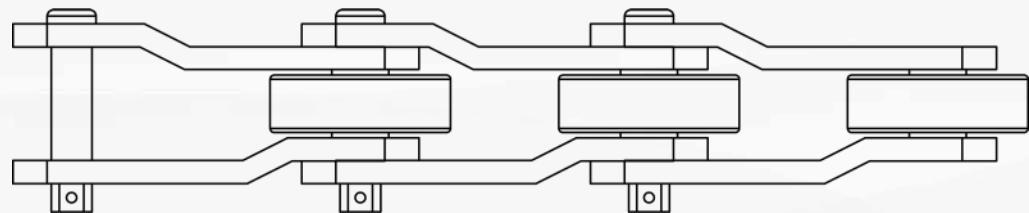
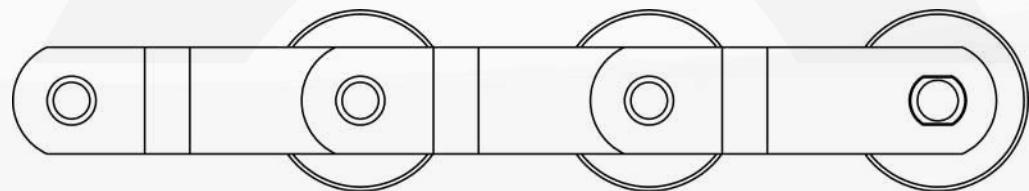


OFFSET BAR TYPE

CONTACT US




**STEEL BUSHED CHAIN WITH ROLLER
CHAIN ATTACHMENTS**

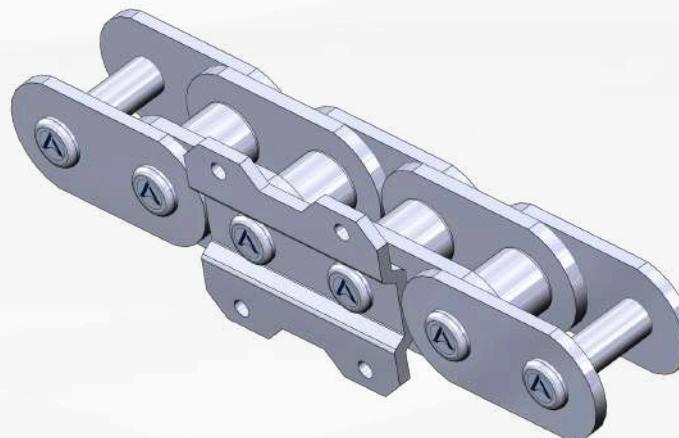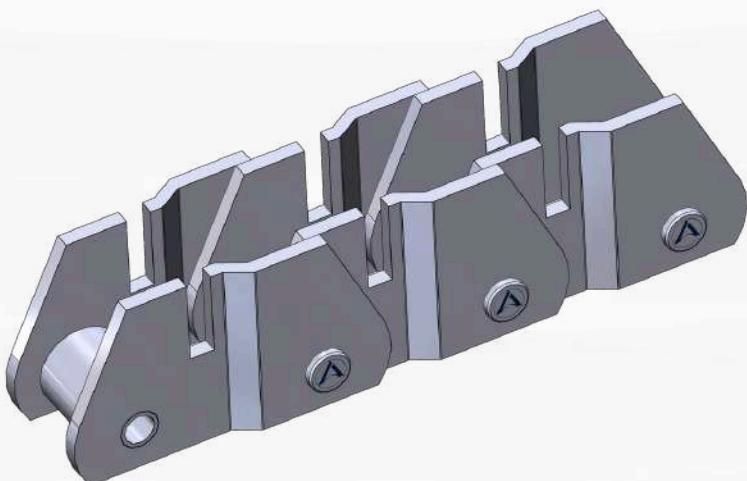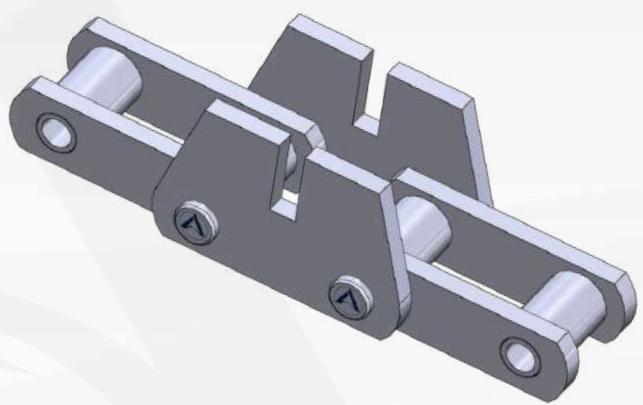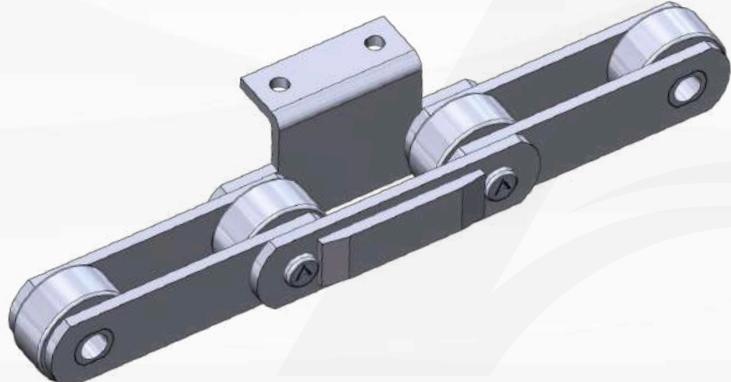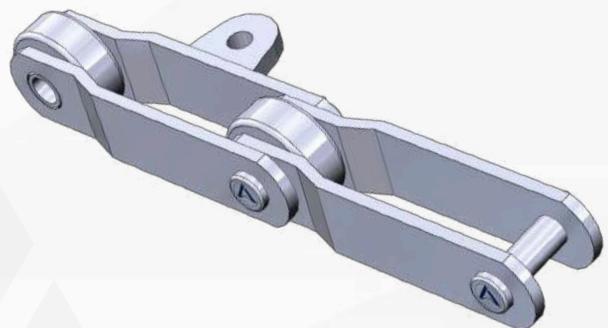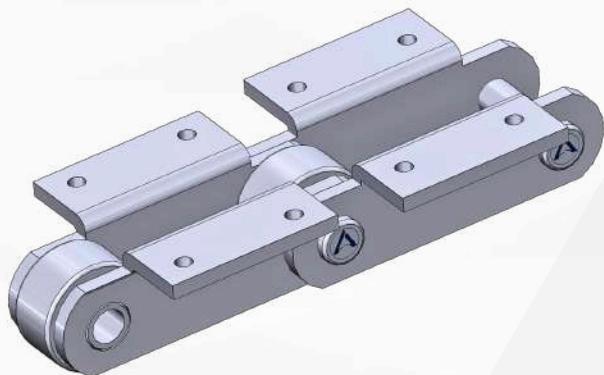

CONTACT US



STEEL BUSHED CHAIN WITH ROLLER

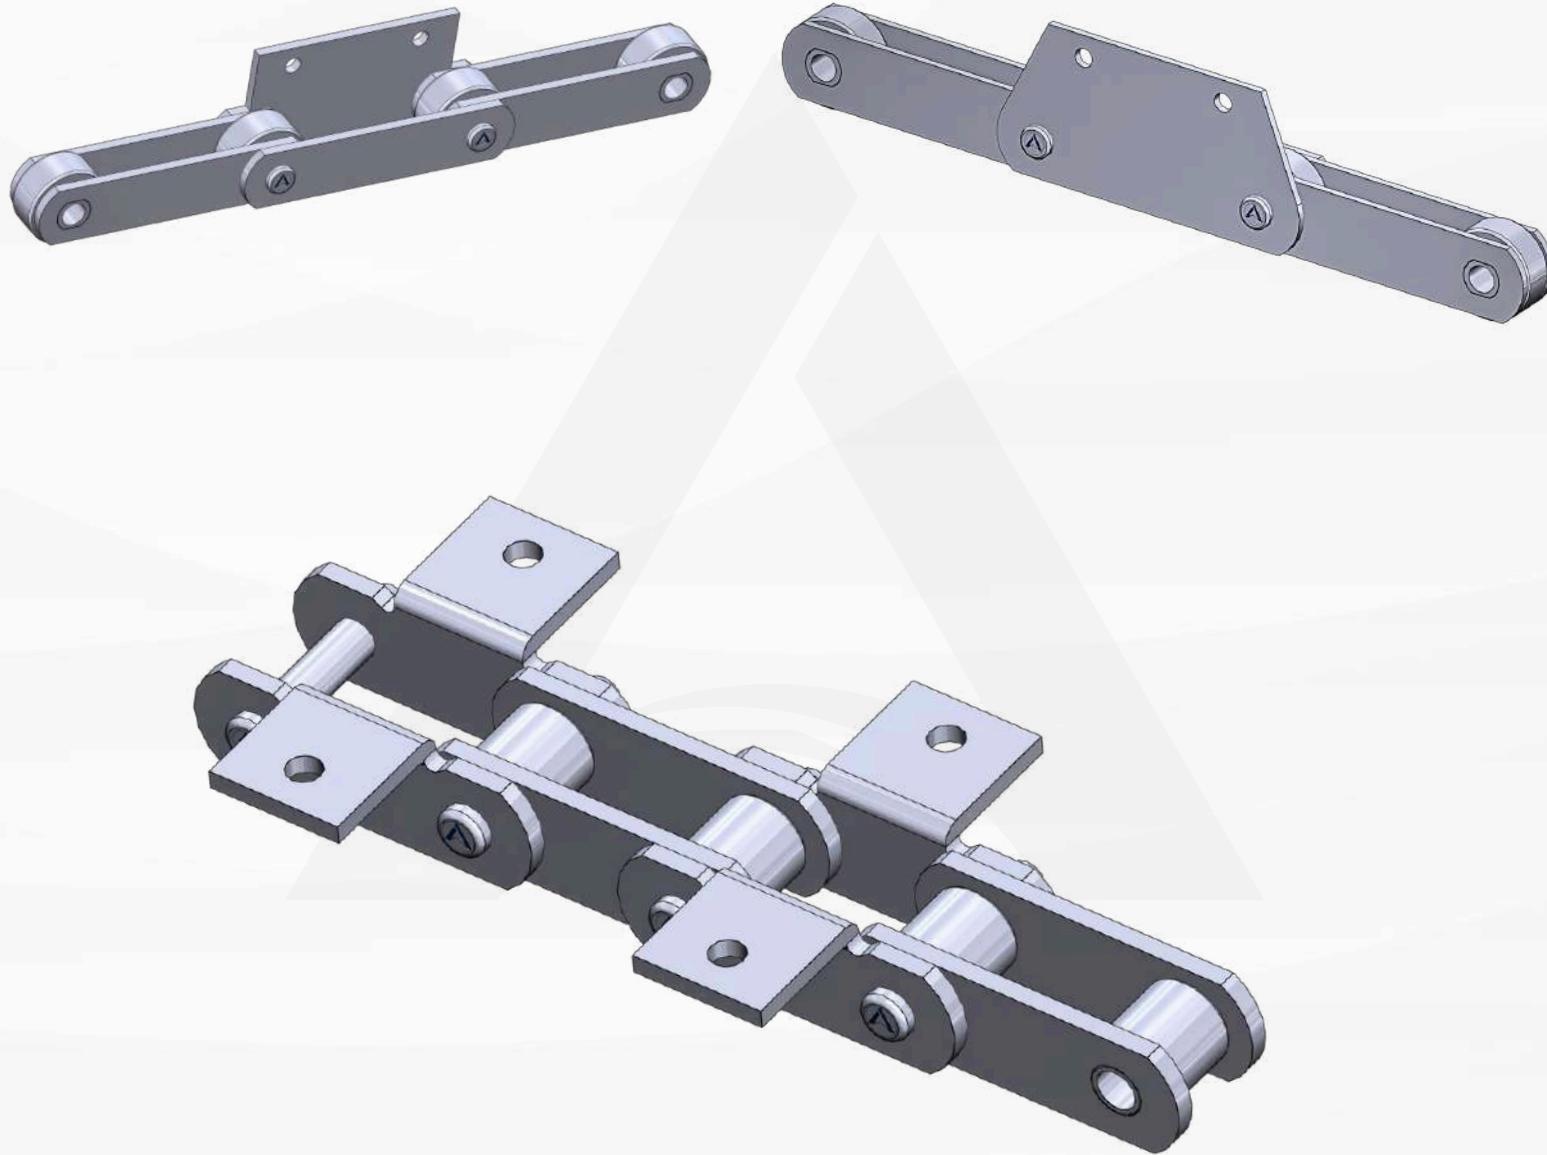

Agamus AI and Automation offers a variety of attachments for steel bushed chains, with customized options available to meet your specific needs. For inquiries or more information, please contact us at sales@agamus.ca or visit our website at www.agamus.ca

CONTACT US



SHARP TOP CHAINS

Agamus AI & Automation Ltd. offers a premium selection of sharp top chains for reliable performance in various material handling applications. These chains ensure secure transport of products, making them ideal for environments that require efficiency and precision.

Key Features:

Enhanced Grip: The sharp top design provides excellent traction, minimizing slippage during transport.

High Strength: Made from durable materials, our sharp top chains can handle heavy loads and tough conditions.

Versatile Applications: Suitable for packaging, bottling, and various manufacturing processes, sharp top chains adapt to many handling needs.

Standard Compliance: All chains meet industry standards, ensuring compatibility with your existing systems.

Comprehensive Solutions:

In addition to sharp top chains, Agamus AI & Automation Ltd. offers a complete range of sprockets, wear components, and tailored solutions to enhance your material handling processes.


For more information or to discuss your specific needs, please contact our customer service team at sales@agamus.ca. We look forward to supporting your operations!




(4 POINT EVERY PITCH SHARP TOP CHAINS)

CONTACT US



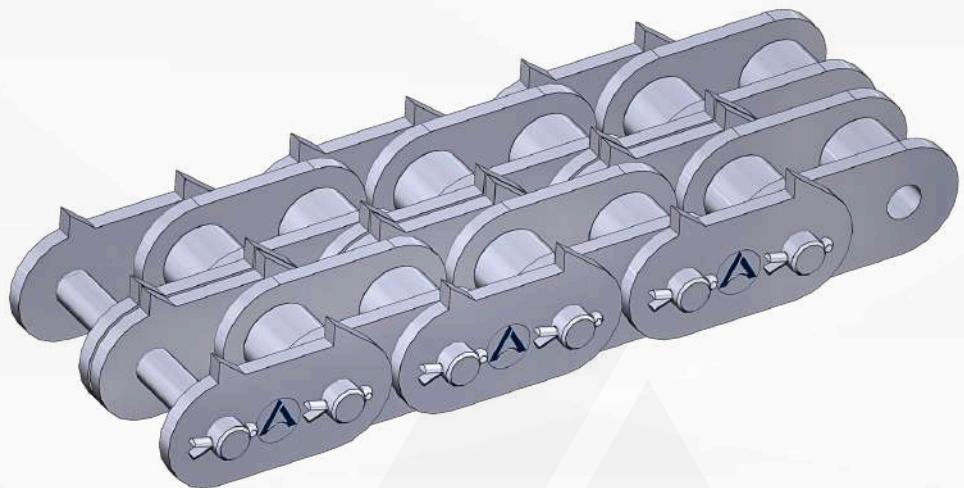


2-POINT SLASHER LOW PROFILE (SLL)

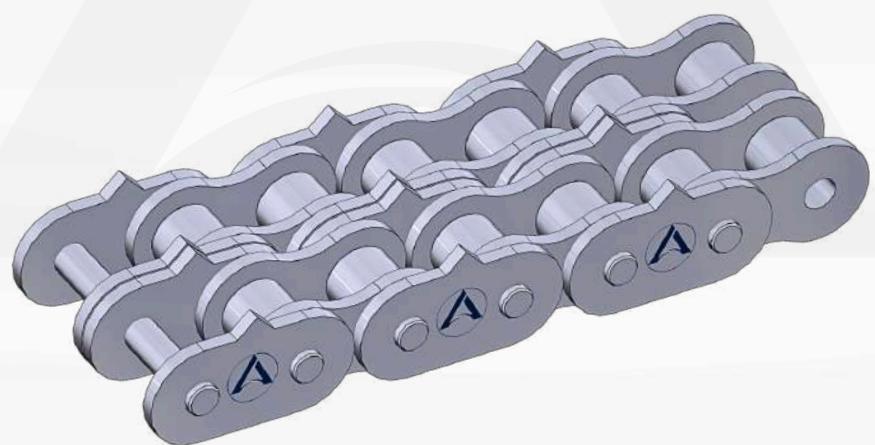


1-POINT (SERIES) SHARP TOP CHAIN

CONTACT US



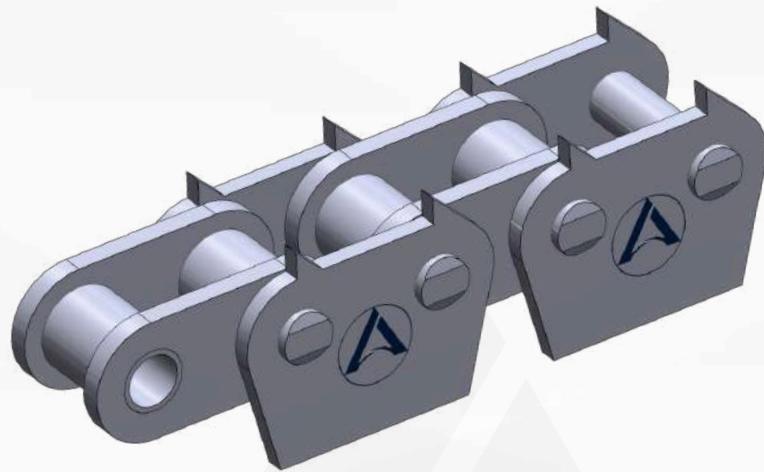

32B SHARP TOP CHAINS

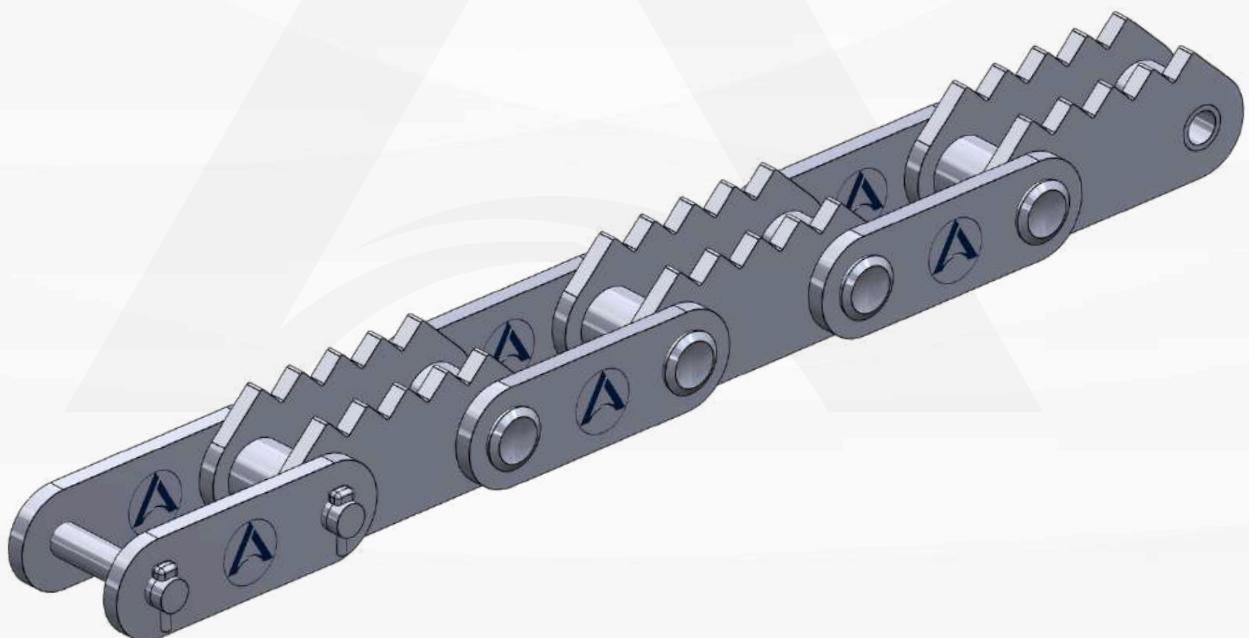







(5 POINT EVERY PITCH SHARP TOP CHAIN)

Agamus AI and Automation offers a variety of Sharp Top chains, with customized options available to meet your specific needs. For inquiries or more information, please contact us at sales@agamaus.ca or visit our website at www.agamus.ca

CONTACT US



DROP FORGED & RIVETLESS CHAINS

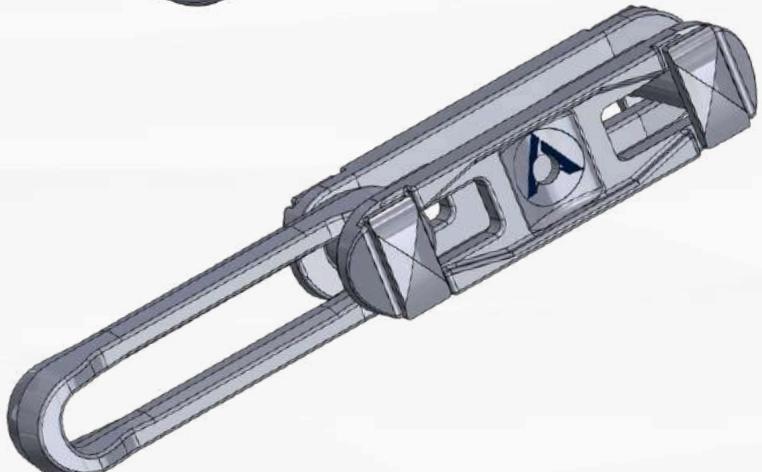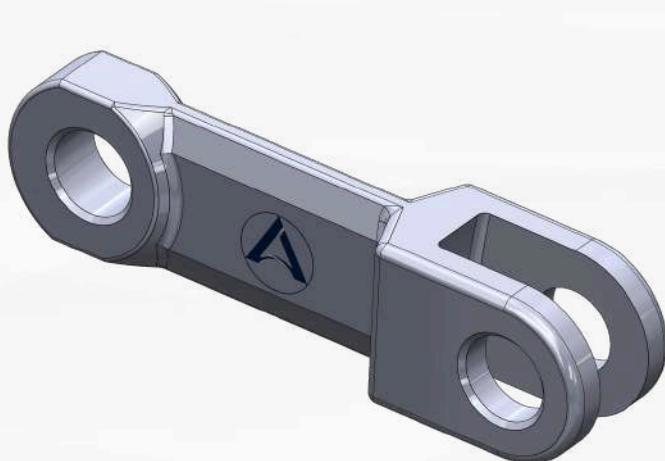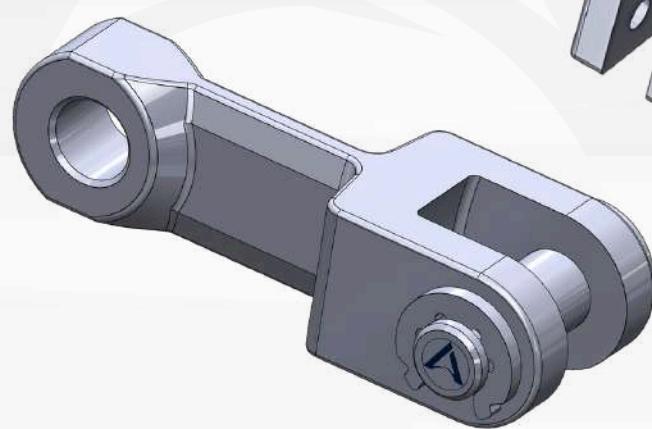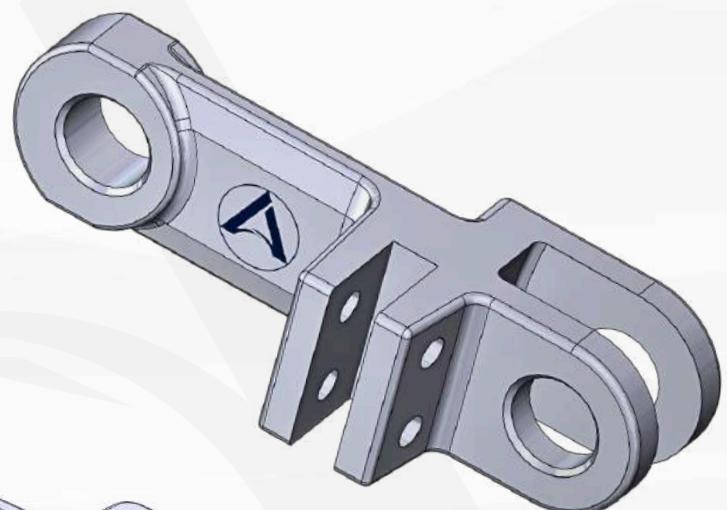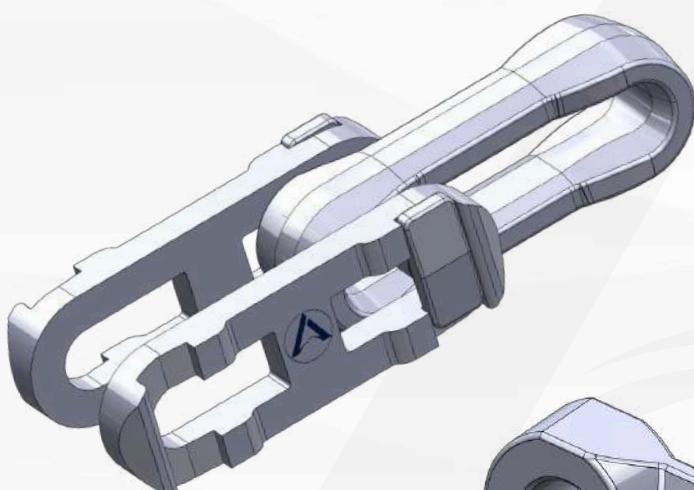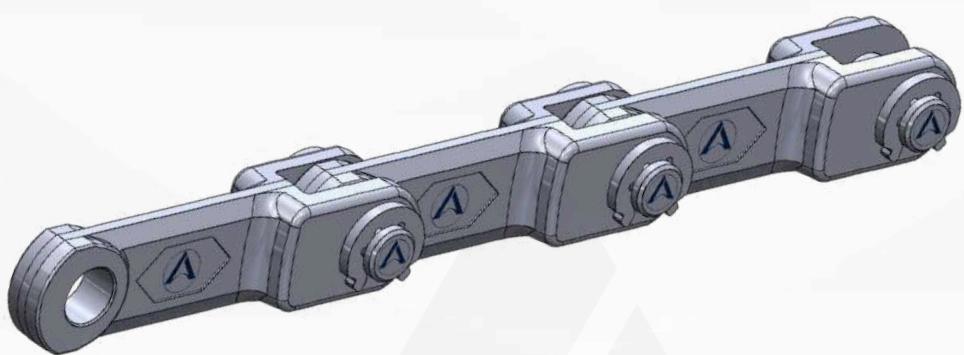

CONTACT US



DROP FORGED CHAINS

Agamus AI & Automation Ltd. offers a premium selection of Drop Forged Chains, renowned for their exceptional strength and durability, making them the ideal solution for heavy-duty material handling across diverse industries.

Key Features:

- **Superior Strength:** Drop forged chains are designed to withstand heavy loads and harsh operating conditions.
- **Long-Lasting Durability:** Crafted to endure extreme wear, these chains ensure consistent performance and longevity.
- **Versatile Applications:** Ideal for use in conveyor systems, agricultural machinery, lifting operations, waste-to-energy systems, chemical plants, cement production, and more.
- **Customizable Options:** Available in a range of materials including carbon steel, alloy steel, and stainless steel for corrosion resistance.

Types of Drop Forged Chain offered:

1. **Standard Drop Forged Chain:** Available in carbon steel or high-strength alloy steel, ideal for industrial and agricultural applications.
2. **X-Type Drop Forged Rivetless Chain:** Available in hardened alloy steel, perfect for both agricultural and industrial environments.
3. **Bar Loop Drop Forged Chain:** Tailored for specific uses like elevator bolts, offering reliable performance in niche applications.
4. **Drop Forged Conveyor Chain (Fork Link Chain):** Available for bulk material handling, including products such as grain, coal, and ash.

Material Options Available:

- **TN (Manganese Chrome Alloy Steel):** Case-hardened with 20MnCr5 composition, offering high wear resistance and strength.
- **CN (Chrome Nickel Alloy Steel):** Case-hardened with 18NiCoMo5 composition for improved toughness and durability.
- **CD (Chrome Moly Alloy Steel):** Hardened and tempered with 42CrMo4 composition, ideal for high-stress applications.

Comprehensive Solutions:

In addition to Drop Forged Chains, **Agamus AI & Automation Ltd.** offers a full range of complementary products, including chain attachments, sprockets, and customized solutions to enhance your material handling systems.

For more information or to discuss your specific needs, please contact our sales team at sales@agamus.ca. We look forward to supporting your operations!


CONTACT US



STANDARD & X-TYPE DROP FORGED CHAIN

CHAIN NO	P	d2	L	h2	H	t	T	b1
X228	2.00 "	0.25 "	1.09 "	0.31 "	0.71 "	0.25 "	0.37 "	0.51 "
X348	3.00 "	0.49 "	1.73 "	0.53 "	1.10 "	0.40 "	0.51 "	0.79 "
X458	4.00 "	0.63 "	2.25 "	0.66 "	1.44 "	0.48 "	0.64 "	1.07 "
X458XHD	4.00 "	0.63 "	2.25 "	0.66 "	1.44 "	0.48 "	0.64 "	1.07 "
468	4.03 "	0.75 "	3.31 "	0.88 "	1.88 "	0.41 "	1.13 "	1.69 "
X678	6.00 "	0.87 "	3.03 "	0.95 "	2.03 "	0.70 "	0.83 "	1.35 "
X678XHD	6.00 "	0.87 "	3.03 "	0.95 "	2.03 "	0.70 "	0.83 "	1.35 "
698	6.00 "	1.13 "	3.75 "	1.25 "	2.56 "	0.56 "	1.00 "	1.63 "
698XHD	6.00 "	1.13 "	3.75 "	1.25 "	2.56 "	0.56 "	1.00 "	1.63 "
998	9.03 "	1.13 "	3.75 "	1.25 "	2.66 "	0.56 "	1.00 "	1.69 "
9118	9.03 "	1.38 "	4.88 "	1.50 "	3.00 "	0.78 "	1.31 "	2.01 "


X-TYPE DROP FORGED RIVETLESS CHAIN

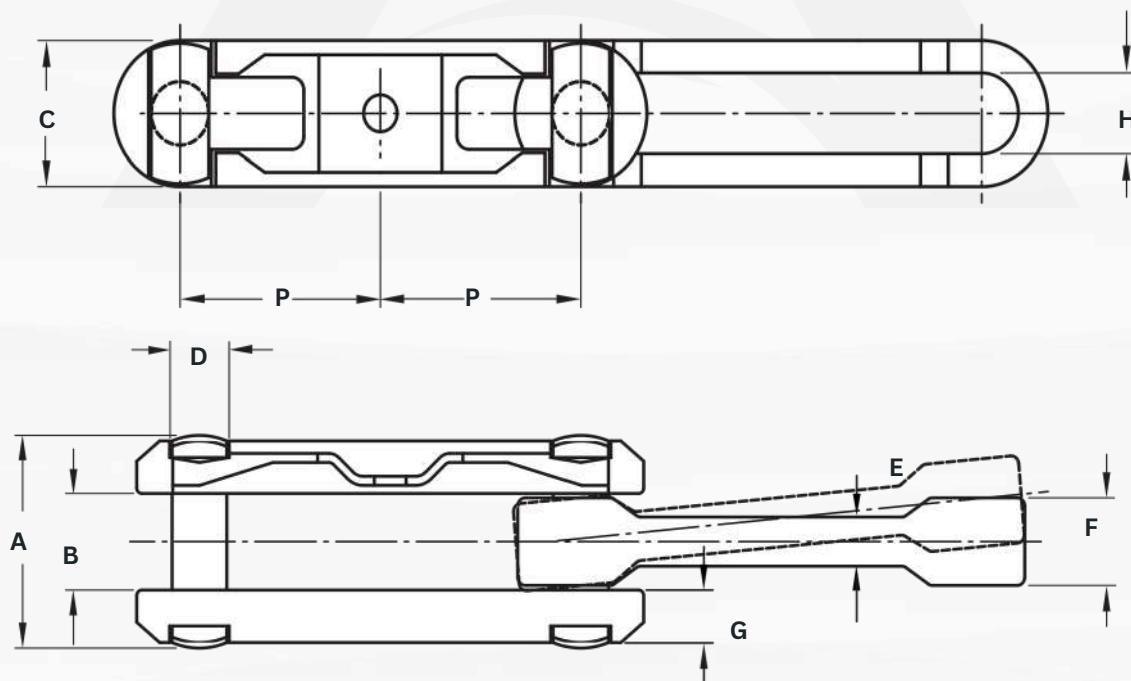


CONTACT US



BAR LOOP TYPE DROP FORGED RIVETLESS CHAIN

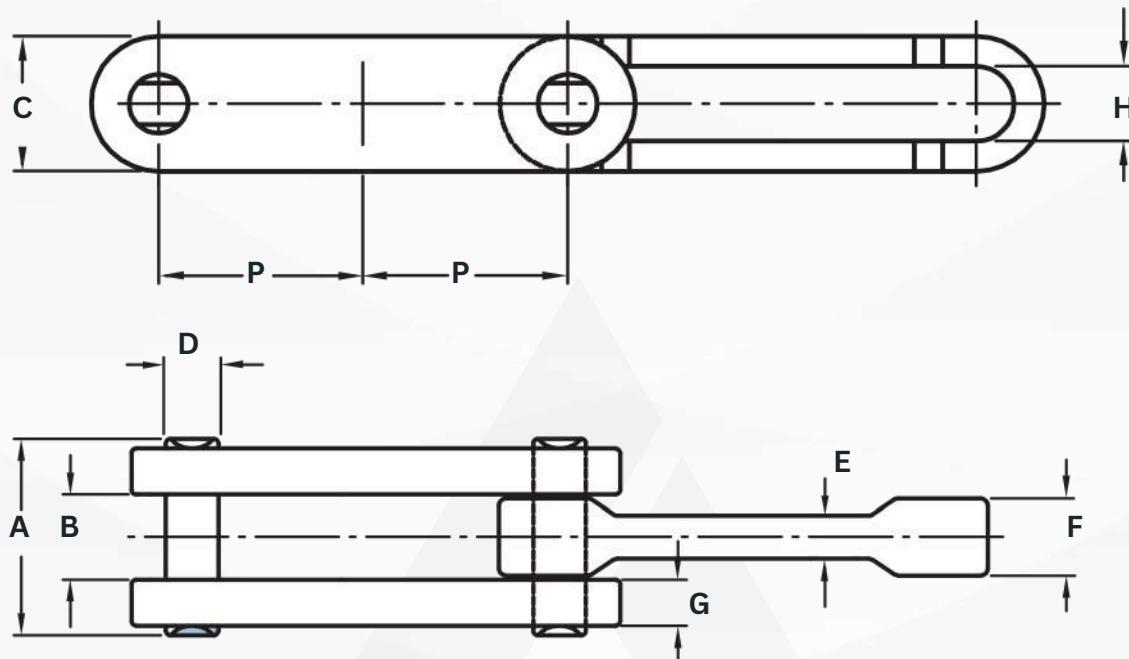

STANDARD FORGED LINK

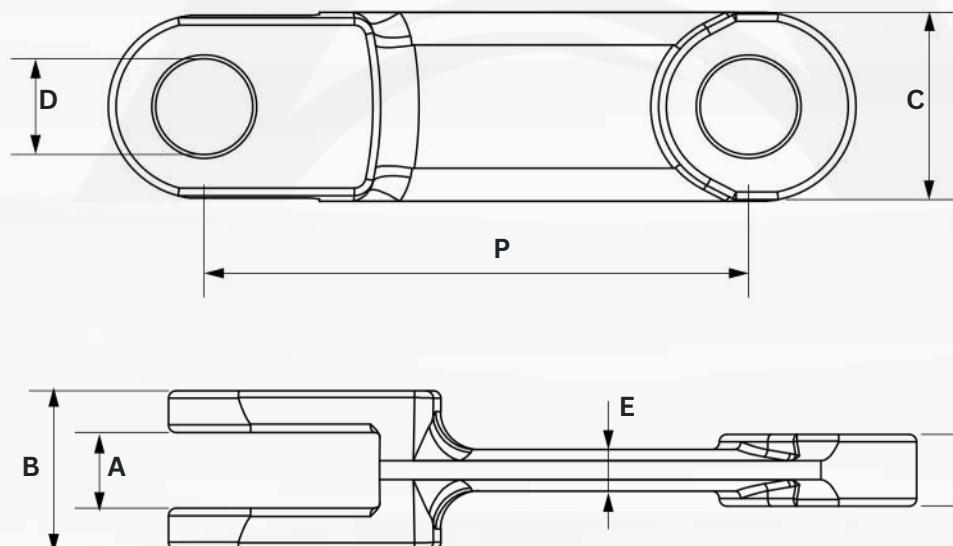

CONTACT US



STANDARD FORGED LINK

CHAIN NUMBER	P (mm)	P	B	C	F	A	E	D
10160	101.6	4.000"	0.945"	1.417"	0.354"	0.394"	0.236"	0.551"
10160R	101.6	4.000"	1.181"	1.417"	0.512"	0.551"	0.354"	0.551"
12514	125	4.921"	1.181"	1.417"	0.512"	0.551"	0.394"	0.630"
14214	142	5.591"	1.260"	1.614"	0.551"	0.591"	0.354"	0.709"
14218	142	5.591"	1.654"	1.969"	0.748"	0.787"	0.472"	0.984"
14222	142	5.591"	2.126"	1.969"	0.984"	1.063"	0.630"	0.984"
14226	142	5.591"	2.441"	1.969"	1.102"	1.181"	0.630"	0.984"
16018	160	6.299"	1.811"	1.811"	0.866"	0.945"	0.591"	0.866"
16025	160	6.299"	1.969"	2.087"	0.906"	0.984"	0.512"	0.984"
20025	200	7.874"	2.362"	1.969"	0.984"	1.063"	0.709"	0.984"
20028	200	7.874"	2.598"	2.362"	1.181"	1.260"	0.787"	1.181"
21640	216	8.504"	2.520"	2.835"	1.024"	1.102"	0.787"	1.378"
22040	220	8.661"	2.520"	2.835"	1.024"	1.102"	0.787"	1.378"
22050	220	8.661"	2.283"	2.953"	1.102"	1.181"	0.984"	1.260"
22060	220	8.661"	2.795"	2.953"	1.220"	1.299"	0.827"	1.378"
25040	250	9.843"	2.756"	2.953"	1.260"	1.339"	0.709"	1.260"
26035	260	10.236"	2.559"	2.953"	1.220"	1.299"	0.787"	1.260"
26040	260	10.236"	2.756"	2.953"	1.220"	1.299"	0.787"	1.260"
26045	260	10.236"	3.071"	2.953"	1.378"	1.457"	0.787"	1.260"

FORGED CHAIN LINK (DOUBLE SERIES)

Chain No	P (mm)	P	B	C	F	Z	G	D
142182	142	5.591"	1.654"	1.969"	0.748"	2.756"	0.512"	0.984"
142262	142	5.591"	2.441"	1.969"	1.102"	3.425"	0.512"	0.984"
160252	160	6.299"	1.969"	2.087"	0.906"	3.228"	0.512"	0.984"
175402	175	6.890"	2.835"	2.362"	1.181"	3.740"	0.630"	1.181"
200252	200	7.874"	2.362"	1.969"	0.984"	3.189"	0.472"	0.984"
200402	200	7.874"	2.756"	2.362"	1.181"	3.740"	0.512"	1.181"
250252	250	9.843"	2.362"	1.969"	0.984"	3.189"	0.472"	0.984"
250402	250	9.843"	2.756"	2.362"	1.181"	3.740"	0.512"	1.181"
250602	250	9.843"	3.937"	2.756"	1.772"	5.512"	0.827"	1.378"





FORGED CHAIN LINK (TRIPLE SERIES)

Chain No.	P(mm)	P	B	C	F	Z	G	D
142183	142	5.591"	1.654"	1.969"	0.748"	3.622"	0.512"	0.984"
142263	142	5.591"	2.441"	1.969"	1.102"	4.421"	0.512"	0.984"

CONTACT US




FORGED CHAIN LINK (DOUBLE SERIES)

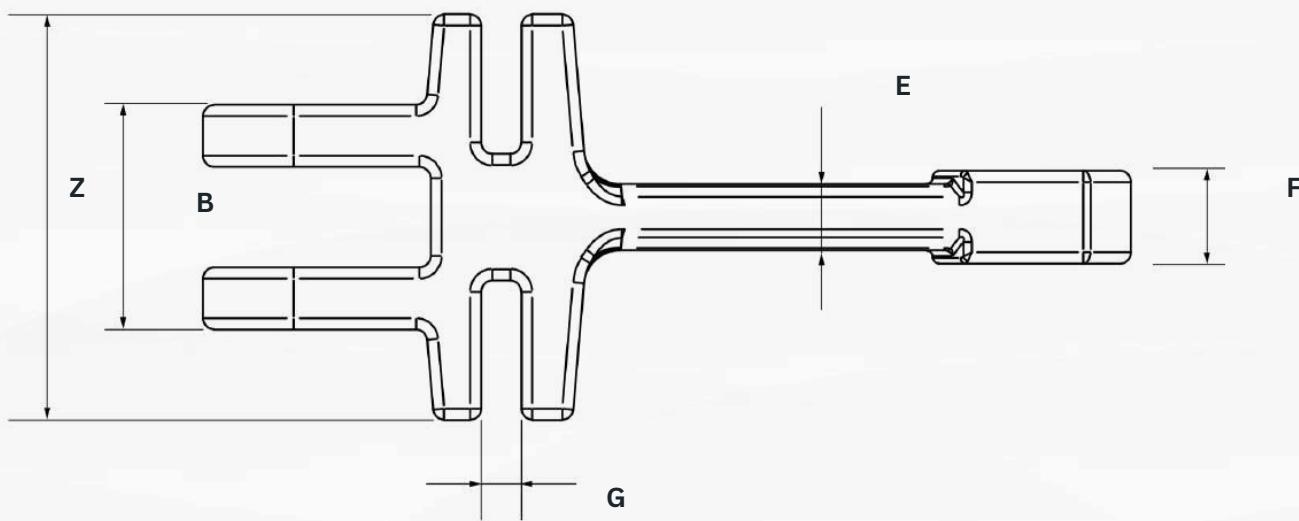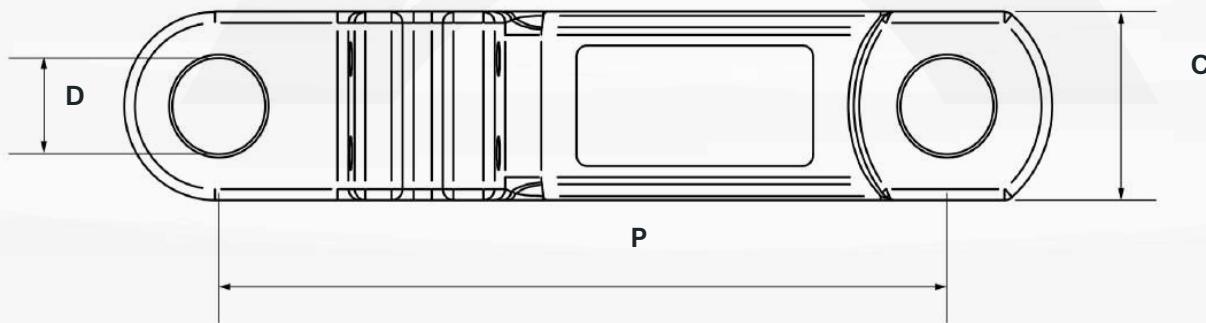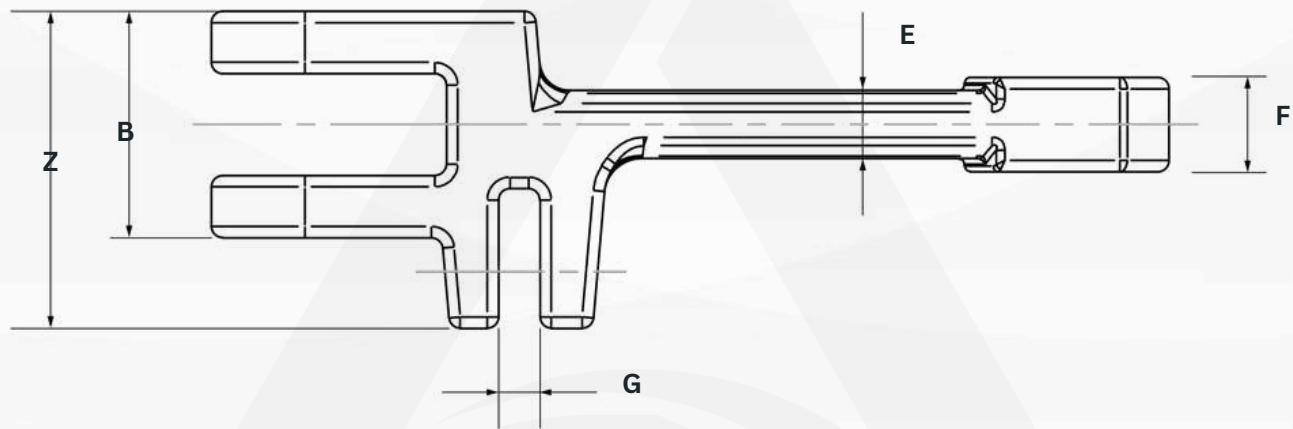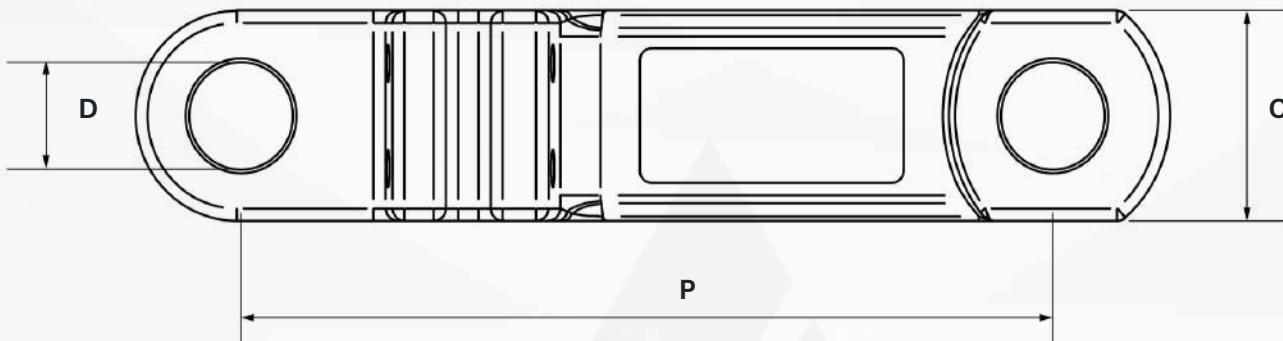

CONTACT US




FORGED CHAIN ATTACHMENTS

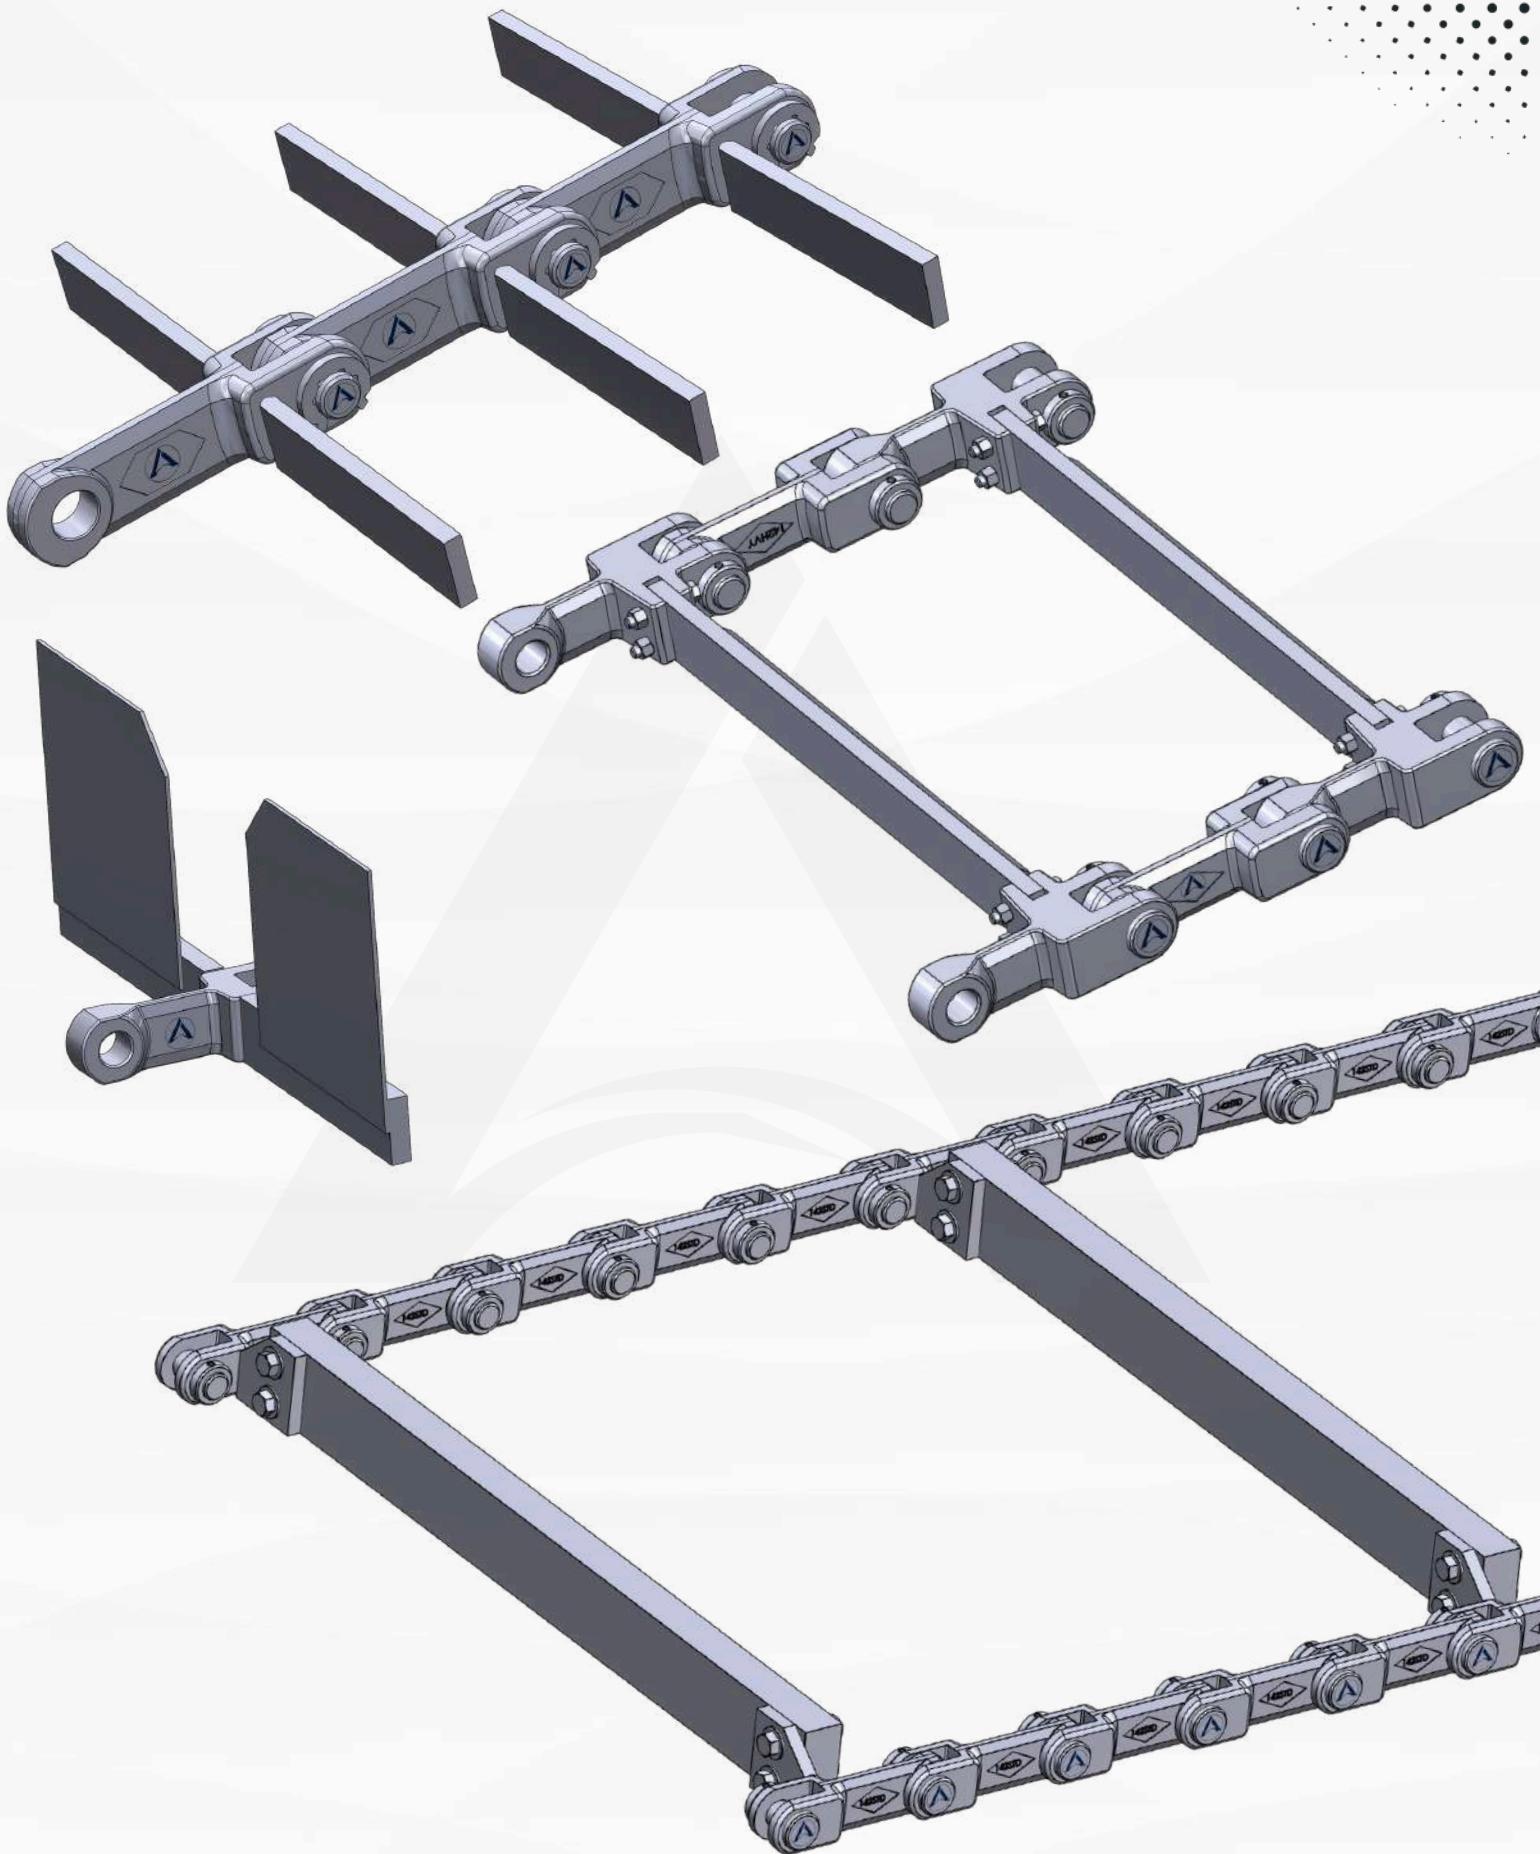

CONTACT US





ROUND AND SQUARE LINK CHAINS

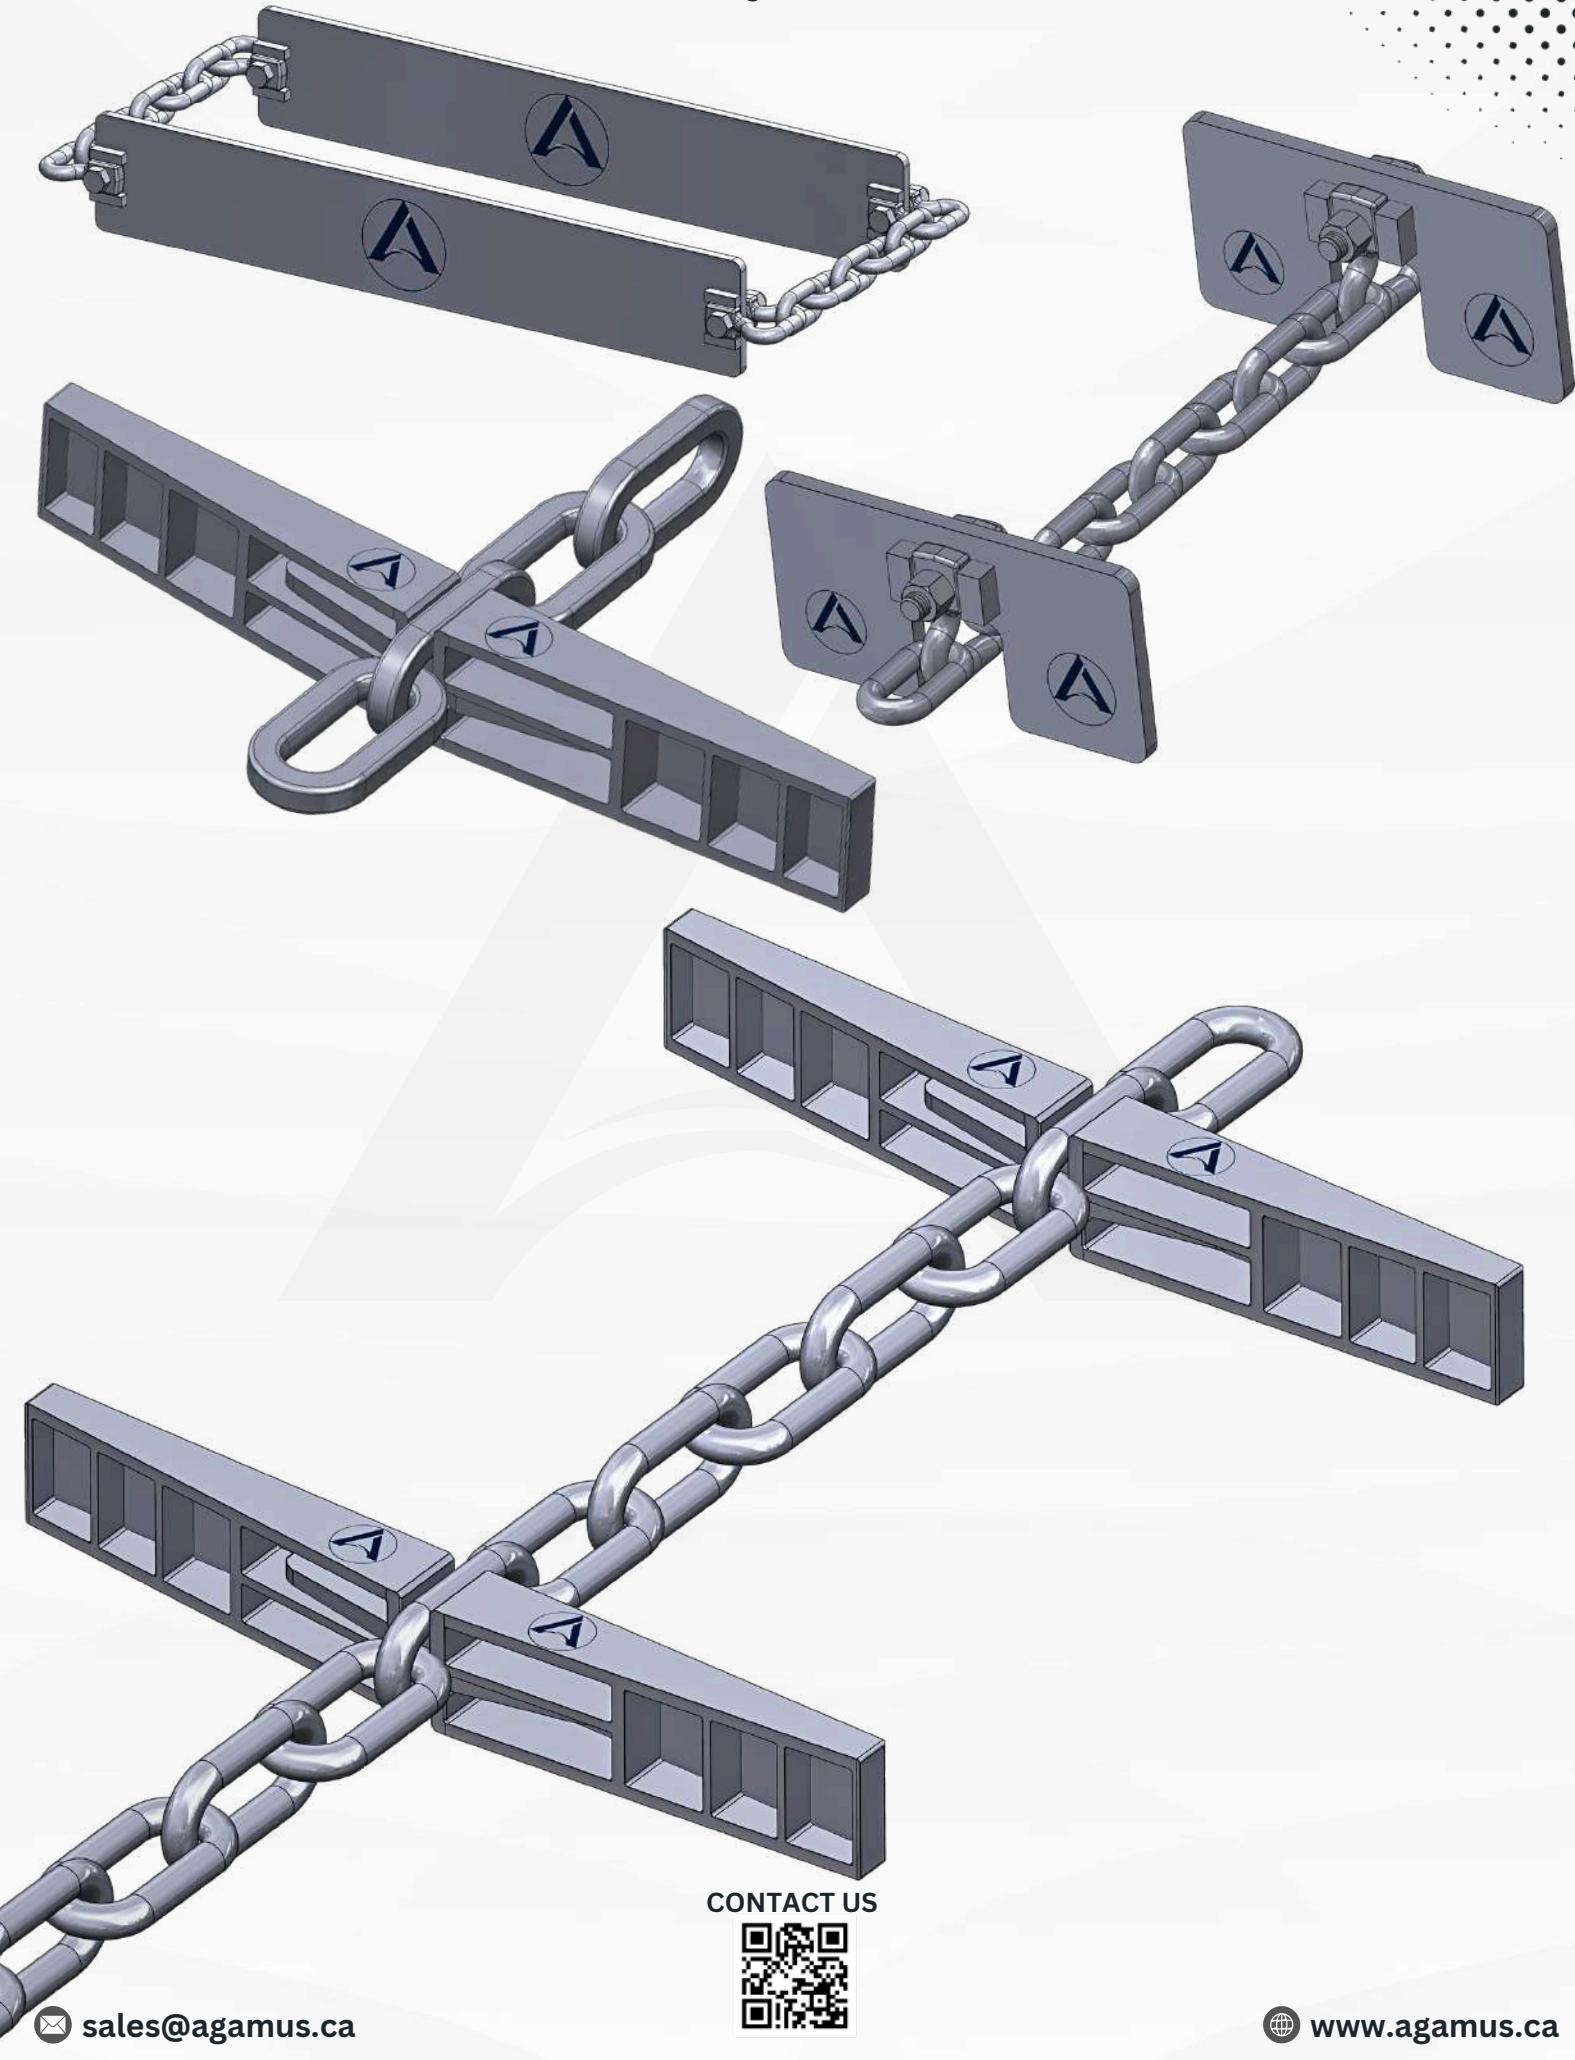

CONTACT US



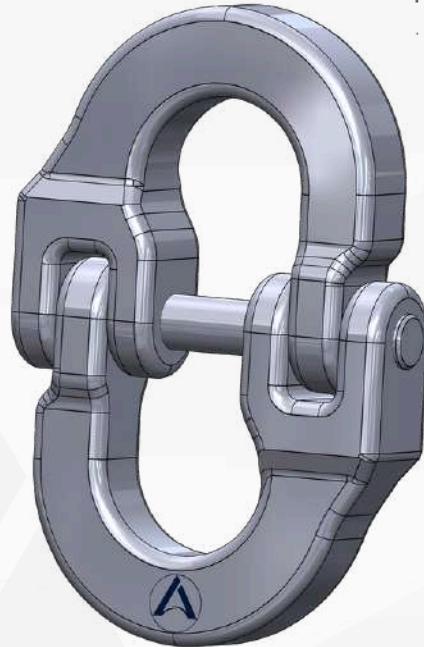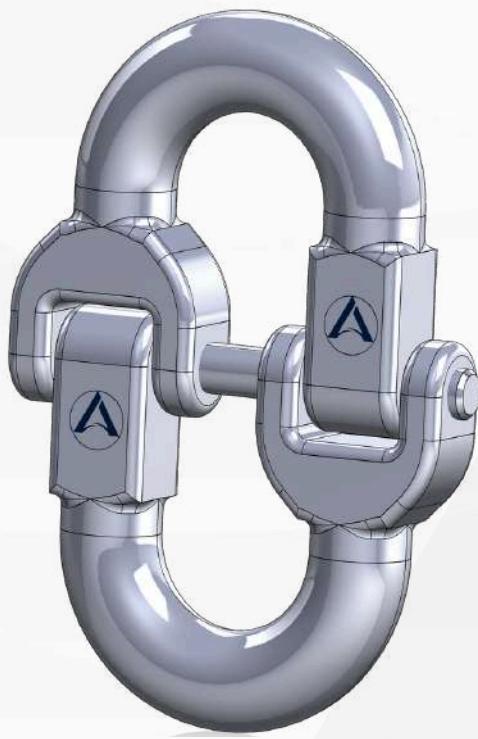

SCAN TO
GET YOUR QUOTE




AGAMUS AI & AUTOMATION
404 - 1688,152 Street Surrey, V4A
4NB, BC  Canada

Agamus AI and Automation offers a variety of chains and attachments for various industries , with customized options available to meet your specific needs. For inquiries or more information, please contact us at sales@agamus.ca or visit our website at www.agamus.ca

Disclaimer: The dimensions provided in this catalogue are for reference only. Actual dimensions may vary. Please consult with a representative for precise measurements.

SPROCKETS

AS PER AMERICAN STANDARDS

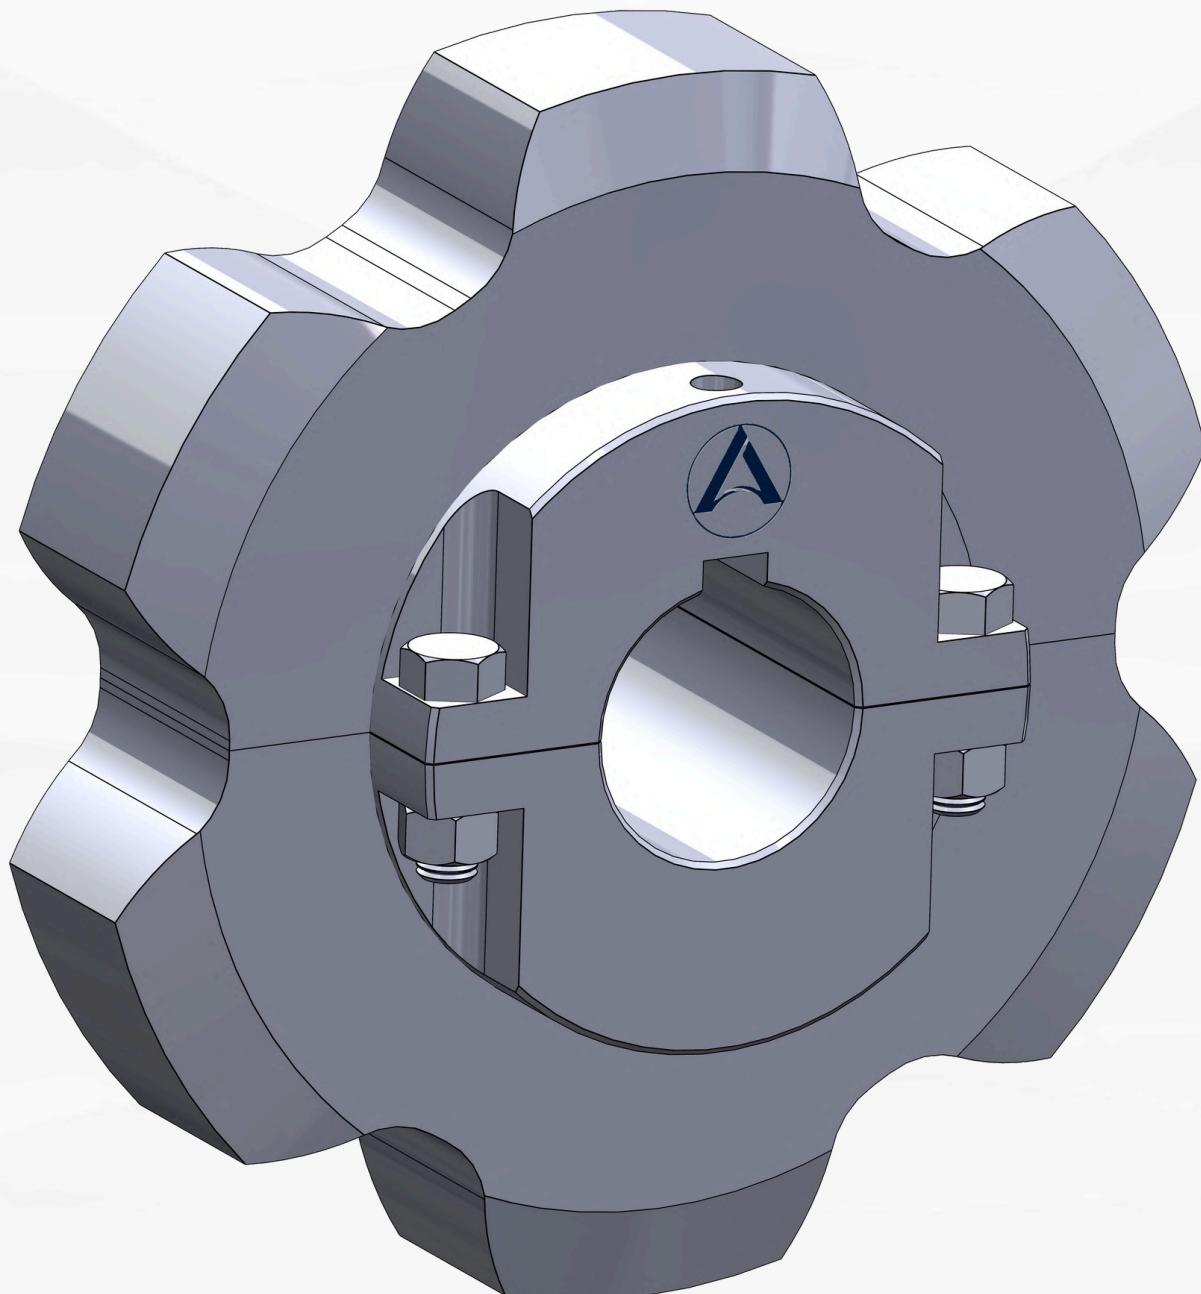


CONTACT US




SPROCKET STYLES



STYLE A

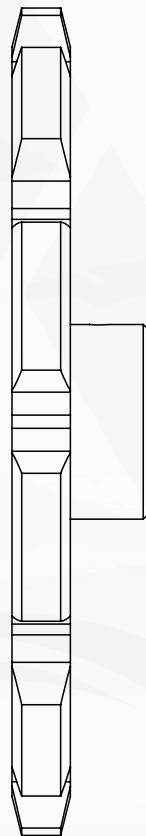

STYLE B

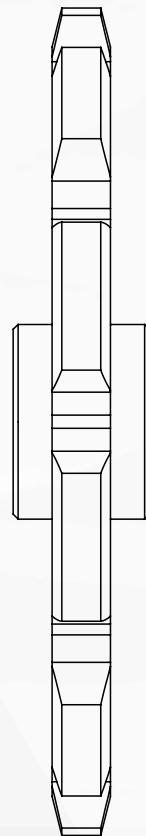

STYLE C

We supply high-quality Style A, B, and C sprockets designed for precision, efficiency, and durability. Discover the perfect sprocket for your needs with Agamus AI & Automations.

Style A Sprockets: Durable and precise, perfect for standard and heavy-duty applications.

Style B Sprockets: Innovative design for high efficiency and customizable options.

Style C Sprockets: Heavy-duty strength for the toughest environments.

CONTACT US



 sales@agamus.ca


 www.agamus.ca

WELDED STEEL SPROCKETS

Discover our comprehensive range of welded steel chain sprockets, including:

- Solid Sprockets
- Split Sprockets
- Split-Segmented Sprockets
- Bolt-On Sprockets

Custom designs are also available to meet your specific requirements.

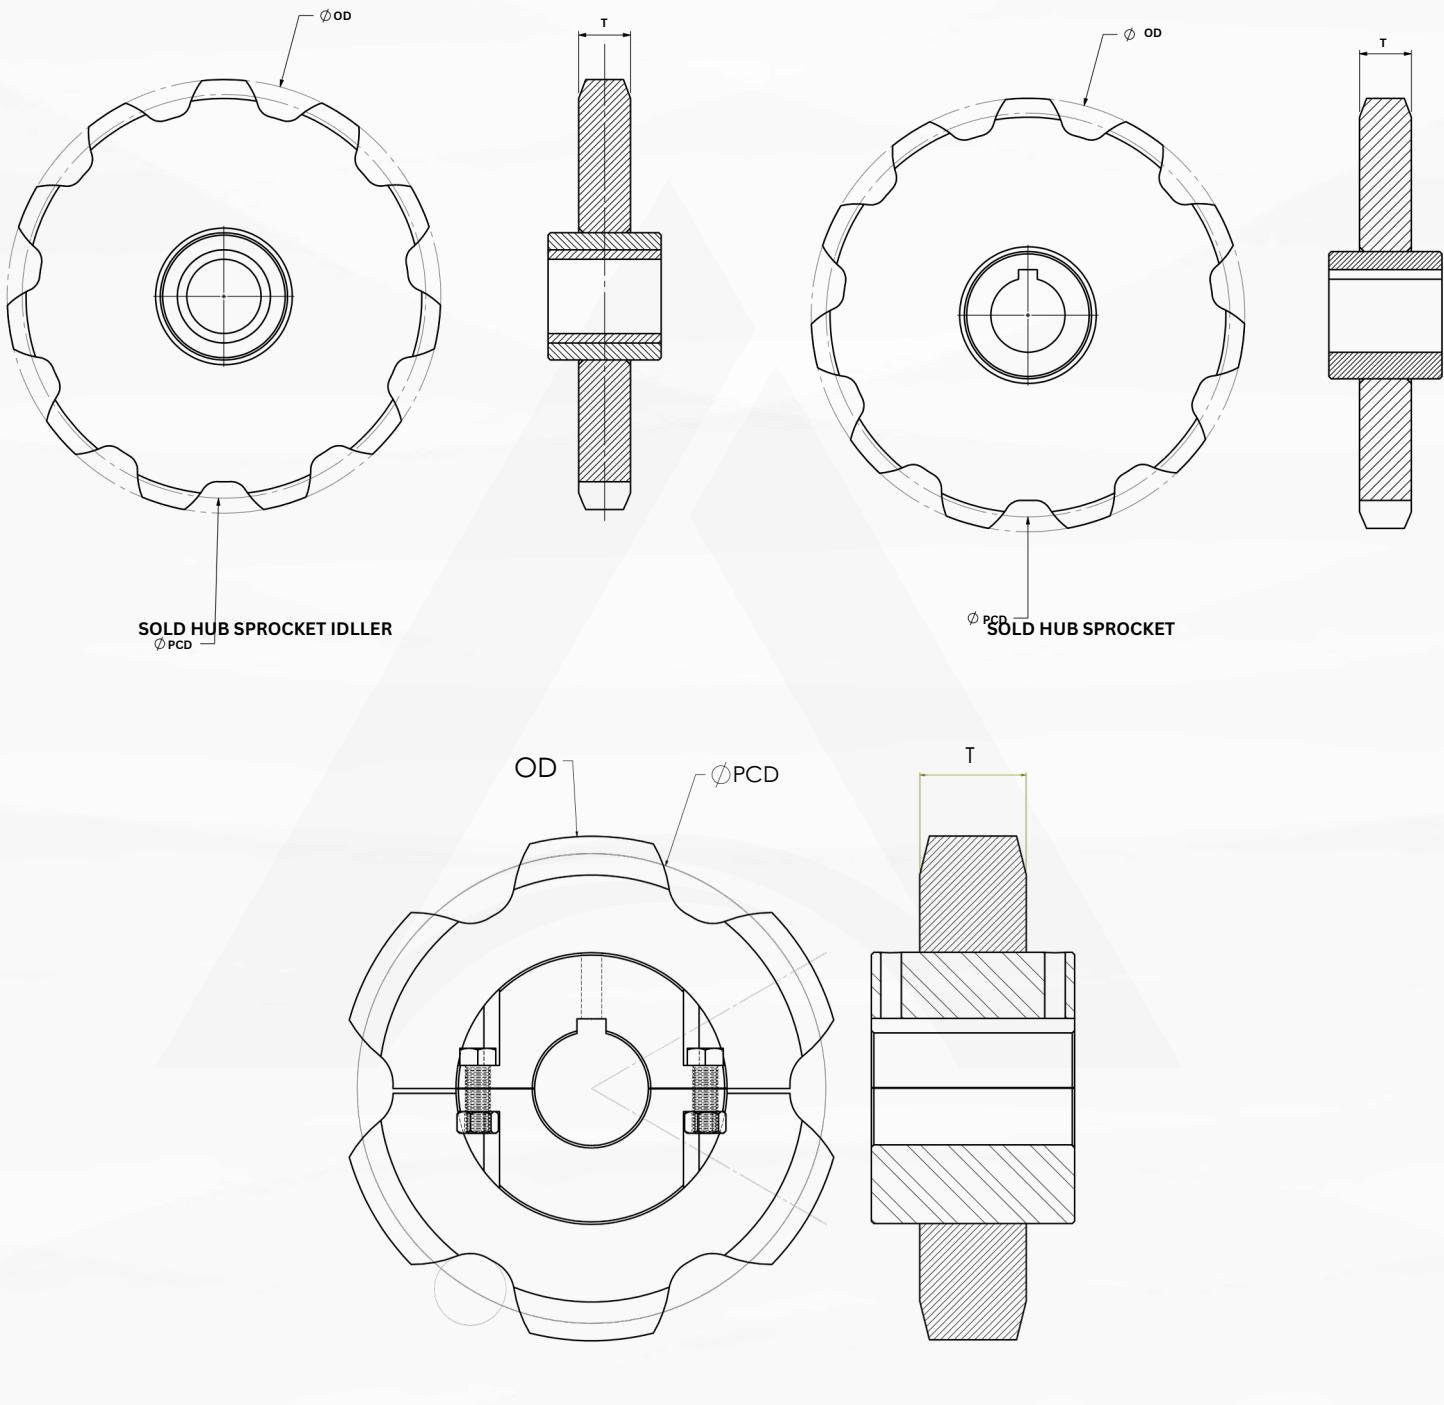


CONTACT US



www.agamus.ca

sales@agamus.ca

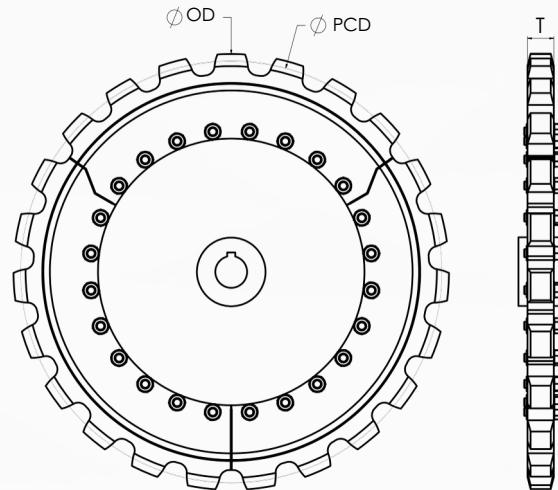

SPLIT HUB SEGMENTED PROCKET

NOMENCLATURE

- **P** = Pitch
- **RD** = Roller Diameter
- **H** = Height of Side Bar
- **N** = Number of Teeth
- **G** = Max Sprocket Thickness
- **T** = Desired Sprocket Thickness
- **PCD** = Pitch Circle Diameter
- **BD** = Base Circle Diameter
- **OD** = Outside Diameter

CHAIN NO	P	N	H	RD	G	PCD	OD	BD	T
WH78	2.609 "	8	1.250 "	0.880 "	1.000 "	6.818 "	7.549 "	5.878 "	0.875 "
	2.609 "	9	1.250 "	0.880 "	1.000 "	7.628 "	8.418 "	6.688 "	0.875 "
	2.609 "	10	1.250 "	0.880 "	1.000 "	8.443 "	9.280 "	7.503 "	0.875 "
	2.609 "	11	1.250 "	0.880 "	1.000 "	9.261 "	10.135 "	8.321 "	0.875 "
	2.609 "	12	1.250 "	0.880 "	1.000 "	10.080 "	10.987 "	9.140 "	0.875 "
	2.609 "	13	1.250 "	0.880 "	1.000 "	10.902 "	11.835 "	9.962 "	0.875 "
	2.609 "	14	1.250 "	0.880 "	1.000 "	11.725 "	12.681 "	10.785 "	0.875 "
	2.609 "	15	1.250 "	0.880 "	1.000 "	12.549 "	13.524 "	11.609 "	0.875 "
	2.609 "	16	1.250 "	0.880 "	1.000 "	13.373 "	14.366 "	12.433 "	0.875 "
	2.609 "	17	1.250 "	0.880 "	1.000 "	14.199 "	15.207 "	13.259 "	0.875 "
	2.609 "	18	1.250 "	0.880 "	1.000 "	15.025 "	16.046 "	14.085 "	0.875 "
	2.609 "	19	1.250 "	0.880 "	1.000 "	15.851 "	16.885 "	14.911 "	0.875 "
	2.609 "	20	1.250 "	0.880 "	1.000 "	16.678 "	17.723 "	15.738 "	0.875 "
WH82	3.075 "	8	1.250 "	1.060 "	1.375 "	8.035 "	8.674 "	6.915 "	1.250 "
	3.075 "	9	1.250 "	1.060 "	1.375 "	8.991 "	9.698 "	7.871 "	1.250 "
	3.075 "	10	1.250 "	1.060 "	1.375 "	9.951 "	10.714 "	8.831 "	1.250 "
	3.075 "	11	1.250 "	1.060 "	1.375 "	10.915 "	11.722 "	9.795 "	1.250 "
	3.075 "	12	1.250 "	1.060 "	1.375 "	11.881 "	12.726 "	10.761 "	1.250 "
	3.075 "	13	1.250 "	1.060 "	1.375 "	12.849 "	13.726 "	11.729 "	1.250 "
	3.075 "	14	1.250 "	1.060 "	1.375 "	13.819 "	14.722 "	12.699 "	1.250 "
	3.075 "	15	1.250 "	1.060 "	1.375 "	14.790 "	15.717 "	13.670 "	1.250 "
	3.075 "	16	1.250 "	1.060 "	1.375 "	15.762 "	16.709 "	14.642 "	1.250 "
	3.075 "	17	1.250 "	1.060 "	1.375 "	16.735 "	17.700 "	15.615 "	1.250 "
	3.075 "	18	1.250 "	1.060 "	1.375 "	17.708 "	18.689 "	16.588 "	1.250 "
	3.075 "	19	1.250 "	1.060 "	1.375 "	18.682 "	19.677 "	17.562 "	1.250 "
	3.075 "	20	1.250 "	1.060 "	1.375 "	19.657 "	20.665 "	18.537 "	1.250 "

CONTACT US



WH124	4.000 "	8	1.500 "	1.250 "	1.125 "	10.453 "	11.157 "	9.143 "	1.000 "
	4.000 "	9	1.500 "	1.250 "	1.125 "	11.695 "	12.490 "	10.385 "	1.000 "
	4.000 "	10	1.500 "	1.250 "	1.125 "	12.944 "	13.811 "	11.634 "	1.000 "
	4.000 "	11	1.500 "	1.250 "	1.125 "	14.198 "	15.123 "	12.888 "	1.000 "
	4.000 "	12	1.500 "	1.250 "	1.125 "	15.455 "	16.428 "	14.145 "	1.000 "
	4.000 "	13	1.500 "	1.250 "	1.125 "	16.714 "	17.729 "	15.404 "	1.000 "
	4.000 "	14	1.500 "	1.250 "	1.125 "	17.976 "	19.025 "	16.666 "	1.000 "
	4.000 "	15	1.500 "	1.250 "	1.125 "	19.239 "	20.319 "	17.929 "	1.000 "
	4.000 "	16	1.500 "	1.250 "	1.125 "	20.503 "	21.609 "	19.193 "	1.000 "
WH111	4.760 "	8	1.750 "	1.250 "	1.125 "	12.438 "	13.242 "	11.128 "	1.000 "
	4.760 "	9	1.750 "	1.250 "	1.125 "	13.917 "	14.828 "	12.607 "	1.000 "
	4.760 "	10	1.750 "	1.250 "	1.125 "	15.404 "	16.400 "	14.094 "	1.000 "
	4.760 "	11	1.750 "	1.250 "	1.125 "	16.895 "	17.961 "	15.585 "	1.000 "
	4.760 "	12	1.750 "	1.250 "	1.125 "	18.391 "	19.515 "	17.081 "	1.000 "
	4.760 "	13	1.750 "	1.250 "	1.125 "	19.890 "	21.062 "	18.580 "	1.000 "
	4.760 "	14	1.750 "	1.250 "	1.125 "	21.391 "	22.605 "	20.081 "	1.000 "
	4.760 "	15	1.750 "	1.250 "	1.125 "	22.894 "	24.144 "	21.584 "	1.000 "
	4.760 "	16	1.750 "	1.250 "	1.125 "	24.399 "	25.680 "	23.089 "	1.000 "
WH110	6.000 "	8	1.500 "	1.250 "	1.880 "	15.679 "	15.985 "	14.369 "	1.750 "
	6.000 "	9	1.500 "	1.250 "	1.880 "	17.543 "	17.985 "	16.233 "	1.750 "
	6.000 "	10	1.500 "	1.250 "	1.880 "	19.416 "	19.966 "	18.106 "	1.750 "
	6.000 "	11	1.500 "	1.250 "	1.880 "	21.297 "	21.934 "	19.987 "	1.750 "
	6.000 "	12	1.500 "	1.250 "	1.880 "	23.182 "	23.892 "	21.872 "	1.750 "
	6.000 "	13	1.500 "	1.250 "	1.880 "	25.071 "	25.843 "	23.761 "	1.750 "
	6.000 "	14	1.500 "	1.250 "	1.880 "	26.964 "	27.788 "	25.654 "	1.750 "
	6.000 "	15	1.500 "	1.250 "	1.880 "	28.858 "	29.728 "	27.548 "	1.750 "
	6.000 "	16	1.500 "	1.250 "	1.880 "	30.755 "	31.664 "	29.445 "	1.750 "
WH106	6.000 "	8	1.500 "	1.250 "	1.500 "	15.679 "	15.985 "	14.369 "	1.375 "
	6.000 "	9	1.500 "	1.250 "	1.500 "	17.543 "	17.985 "	16.233 "	1.375 "
	6.000 "	10	1.500 "	1.250 "	1.500 "	19.416 "	19.966 "	18.106 "	1.375 "
	6.000 "	11	1.500 "	1.250 "	1.500 "	21.297 "	21.934 "	19.987 "	1.375 "
	6.000 "	12	1.500 "	1.250 "	1.500 "	23.182 "	23.892 "	21.872 "	1.375 "
	6.000 "	13	1.500 "	1.250 "	1.500 "	25.071 "	25.843 "	23.761 "	1.375 "
	6.000 "	14	1.500 "	1.250 "	1.500 "	26.964 "	27.788 "	25.654 "	1.375 "
	6.000 "	15	1.500 "	1.250 "	1.500 "	28.858 "	29.728 "	27.548 "	1.375 "
	6.000 "	16	1.500 "	1.250 "	1.500 "	30.755 "	31.664 "	29.445 "	1.375 "

CONTACT US



WH132	6.050 "	8	2.000 "	1.620 "	2.750 "	15.809 "	16.606 "	14.129 "	2.625 "
	6.000 "	9	2.000 "	1.620 "	2.750 "	17.543 "	18.485 "	15.863 "	2.625 "
	6.000 "	10	2.000 "	1.620 "	2.750 "	19.416 "	20.466 "	17.736 "	2.625 "
	6.000 "	11	2.000 "	1.620 "	2.750 "	21.297 "	22.434 "	19.617 "	2.625 "
	6.000 "	12	2.000 "	1.620 "	2.750 "	23.182 "	24.392 "	21.502 "	2.625 "
	6.000 "	13	2.000 "	1.620 "	2.750 "	25.071 "	26.343 "	23.391 "	2.625 "
	6.000 "	14	2.000 "	1.620 "	2.750 "	26.964 "	28.288 "	25.284 "	2.625 "
	6.000 "	15	2.000 "	1.620 "	2.750 "	28.858 "	30.228 "	27.178 "	2.625 "
	6.000 "	16	2.000 "	1.620 "	2.750 "	30.755 "	32.164 "	29.075 "	2.625 "
WH150	6.050 "	8	2.500 "	1.620 "	2.750 "	15.809 "	17.106 "	14.129 "	2.625 "
	6.000 "	9	2.500 "	1.620 "	2.750 "	17.543 "	18.985 "	15.863 "	2.625 "
	6.000 "	10	2.500 "	1.620 "	2.750 "	19.416 "	20.966 "	17.736 "	2.625 "
	6.000 "	11	2.500 "	1.620 "	2.750 "	21.297 "	22.934 "	19.617 "	2.625 "
	6.000 "	12	2.500 "	1.620 "	2.750 "	23.182 "	24.892 "	21.502 "	2.625 "
	6.000 "	13	2.500 "	1.620 "	2.750 "	25.071 "	26.843 "	23.391 "	2.625 "
	6.000 "	14	2.500 "	1.620 "	2.750 "	26.964 "	28.788 "	25.284 "	2.625 "
	6.000 "	15	2.500 "	1.620 "	2.750 "	28.858 "	30.728 "	27.178 "	2.625 "
	6.000 "	16	2.500 "	1.620 "	2.750 "	30.755 "	32.664 "	29.075 "	2.625 "

CONTACT US




www.agamus.ca



sales@agamus.ca

ROLLER CONVEYOR CHAIN SPROCKETS

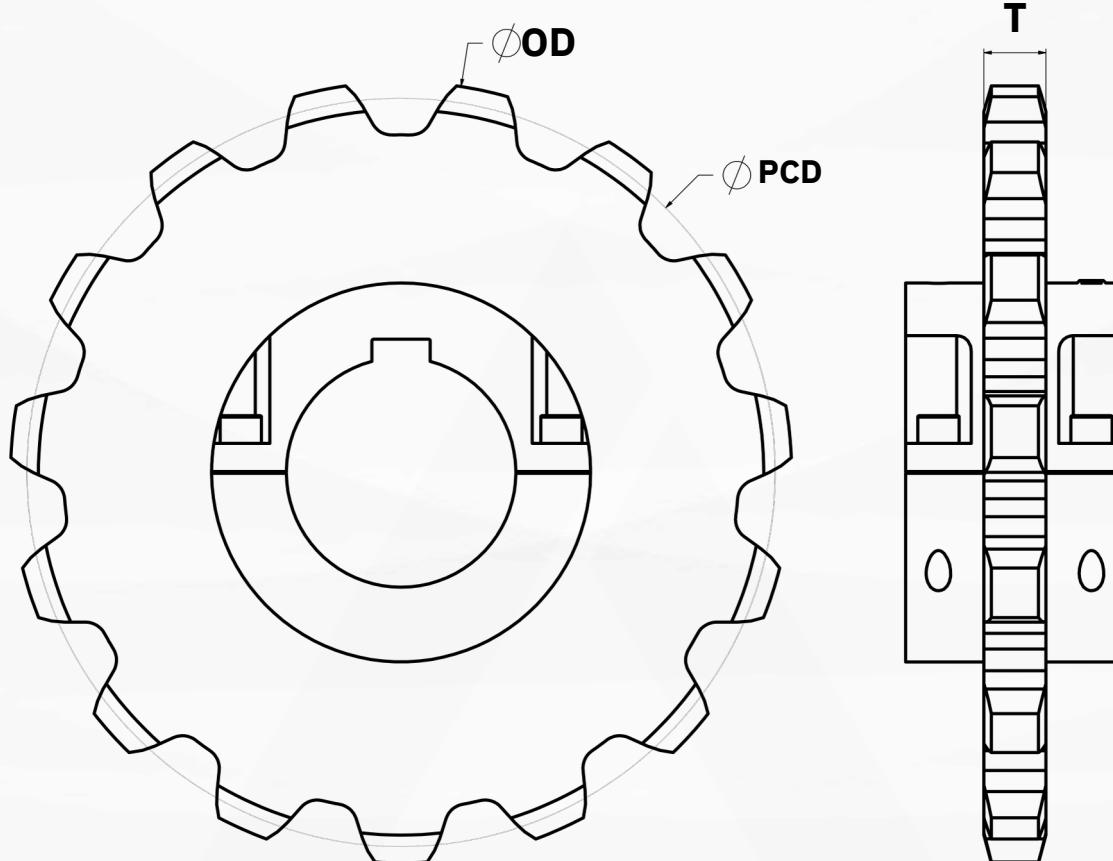

NOMENCLATURE

- **P** = Pitch
- **RD** = Roller Diameter
- **H** = Height of Side Bar
- **N** = Number of Teeth
- **G** = Max Sprocket Thickness
- **T** = Desired Sprocket Thickness
- **PCD** = Pitch Circle Diameter
- **BD** = Base Circle Diameter
- **OD** = Outside Diameter


CONTACT US



CHAIN NO	P	N	H	RD	G	PCD	OD	BD	T
378RX	1.654 "	8	1.120 "	0.880 "	1.000 "	4.322 "	5.113 "	3.382 "	0.875 "
	1.654 "	9	1.120 "	0.880 "	1.000 "	4.836 "	5.664 "	3.896 "	0.875 "
	1.654 "	10	1.120 "	0.880 "	1.000 "	5.352 "	6.210 "	4.412 "	0.875 "
	1.654 "	11	1.120 "	0.880 "	1.000 "	5.871 "	6.753 "	4.931 "	0.875 "
	1.654 "	12	1.120 "	0.880 "	1.000 "	6.391 "	7.293 "	5.451 "	0.875 "
	1.654 "	13	1.120 "	0.880 "	1.000 "	6.911 "	7.831 "	5.971 "	0.875 "
	1.654 "	14	1.120 "	0.880 "	1.000 "	7.433 "	8.367 "	6.493 "	0.875 "
	1.654 "	15	1.120 "	0.880 "	1.000 "	7.955 "	8.901 "	7.015 "	0.875 "
	1.654 "	16	1.120 "	0.880 "	1.000 "	8.478 "	9.435 "	7.538 "	0.875 "
81X	2.609 "	8	1.140 "	0.910 "	1.060 "	6.818 "	7.439 "	5.848 "	0.935 "
	2.609 "	9	1.140 "	0.910 "	1.060 "	7.628 "	8.308 "	6.658 "	0.935 "
	2.609 "	10	1.140 "	0.910 "	1.060 "	8.443 "	9.170 "	7.473 "	0.935 "
	2.609 "	11	1.140 "	0.910 "	1.060 "	9.261 "	10.025 "	8.291 "	0.935 "
	2.609 "	12	1.140 "	0.910 "	1.060 "	10.080 "	10.877 "	9.110 "	0.935 "
	2.609 "	13	1.140 "	0.910 "	1.060 "	10.902 "	11.725 "	9.932 "	0.935 "
	2.609 "	14	1.140 "	0.910 "	1.060 "	11.725 "	12.571 "	10.755 "	0.935 "
	2.609 "	15	1.140 "	0.910 "	1.060 "	12.549 "	13.414 "	11.579 "	0.935 "
	2.609 "	16	1.140 "	0.910 "	1.060 "	13.373 "	14.256 "	12.403 "	0.935 "
93R	3.000 "	8	1.250 "	1.500 "	1.250 "	7.839 "	8.493 "	6.279 "	1.125 "
	3.000 "	9	1.250 "	1.500 "	1.250 "	8.771 "	9.492 "	7.211 "	1.125 "
	3.000 "	10	1.250 "	1.500 "	1.250 "	9.708 "	10.483 "	8.148 "	1.125 "
	3.000 "	11	1.250 "	1.500 "	1.250 "	10.648 "	11.467 "	9.088 "	1.125 "
	3.000 "	12	1.250 "	1.500 "	1.250 "	11.591 "	12.446 "	10.031 "	1.125 "
	3.000 "	13	1.250 "	1.500 "	1.250 "	12.536 "	13.421 "	10.976 "	1.125 "
	3.000 "	14	1.250 "	1.500 "	1.250 "	13.482 "	14.394 "	11.922 "	1.125 "
	3.000 "	15	1.250 "	1.500 "	1.250 "	14.429 "	15.364 "	12.869 "	1.125 "
	3.000 "	16	1.250 "	1.500 "	1.250 "	15.377 "	16.332 "	13.817 "	1.125 "
84R	4.000 "	8	1.500 "	2.250 "	2.310 "	10.453 "	11.157 "	8.143 "	2.185 "
	4.000 "	9	1.500 "	2.250 "	2.310 "	11.695 "	12.490 "	9.385 "	2.185 "
	4.000 "	10	1.500 "	2.250 "	2.310 "	12.944 "	13.811 "	10.634 "	2.185 "
	4.000 "	11	1.500 "	2.250 "	2.310 "	14.198 "	15.123 "	11.888 "	2.185 "
	4.000 "	12	1.500 "	2.250 "	2.310 "	15.455 "	16.428 "	13.145 "	2.185 "
	4.000 "	13	1.500 "	2.250 "	2.310 "	16.714 "	17.729 "	14.404 "	2.185 "
	4.000 "	14	1.500 "	2.250 "	2.310 "	17.976 "	19.025 "	15.666 "	2.185 "
	4.000 "	15	1.500 "	2.250 "	2.310 "	19.239 "	20.319 "	16.929 "	2.185 "
	4.000 "	16	1.500 "	2.250 "	2.310 "	20.503 "	21.609 "	18.193 "	2.185 "
111R	4.040 "	8	1.500 "	2.000 "	1.310 "	10.557 "	11.253 "	8.497 "	1.185 "
	4.040 "	9	1.500 "	2.000 "	1.310 "	11.812 "	12.600 "	9.752 "	1.185 "
	4.040 "	10	1.500 "	2.000 "	1.310 "	13.074 "	13.934 "	11.014 "	1.185 "
	4.040 "	11	1.500 "	2.000 "	1.310 "	14.340 "	15.259 "	12.280 "	1.185 "
	4.040 "	12	1.500 "	2.000 "	1.310 "	15.609 "	16.577 "	13.549 "	1.185 "
	4.040 "	13	1.500 "	2.000 "	1.310 "	16.881 "	17.891 "	14.821 "	1.185 "
	4.040 "	14	1.500 "	2.000 "	1.310 "	18.156 "	19.200 "	16.096 "	1.185 "
	4.040 "	15	1.500 "	2.000 "	1.310 "	19.431 "	20.507 "	17.371 "	1.185 "
	4.040 "	16	1.500 "	2.000 "	1.310 "	20.708 "	21.810 "	18.648 "	1.185 "

CONTACT US



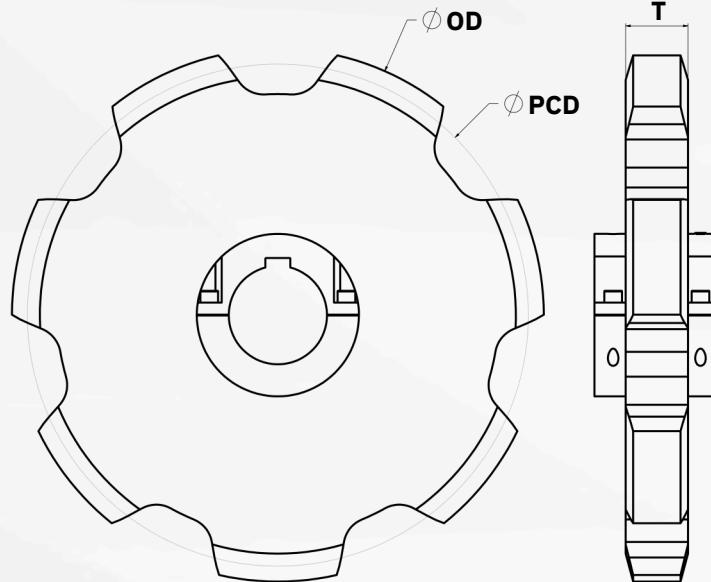

7 TEETH 4004 ROLLER CONVEYOR CHAIN SPROCKET

CHAIN NO	P	N	H	RD	G	PCD	OD	BD	T
604R	6.000 "	8	1.500 "	2.000 "	1.310 "	15.679 "	15.985 "	13.619 "	1.185 "
	6.000 "	9	1.500 "	2.000 "	1.310 "	17.543 "	17.985 "	15.483 "	1.185 "
	6.000 "	10	1.500 "	2.000 "	1.310 "	19.416 "	19.966 "	17.356 "	1.185 "
	6.000 "	11	1.500 "	2.000 "	1.310 "	21.297 "	21.934 "	19.237 "	1.185 "
	6.000 "	12	1.500 "	2.000 "	1.310 "	23.182 "	23.892 "	21.122 "	1.185 "
	6.000 "	13	1.500 "	2.000 "	1.310 "	25.071 "	25.843 "	23.011 "	1.185 "
	6.000 "	14	1.500 "	2.000 "	1.310 "	26.964 "	27.788 "	24.904 "	1.185 "
	6.000 "	15	1.500 "	2.000 "	1.310 "	28.858 "	29.728 "	26.798 "	1.185 "
	6.000 "	16	1.500 "	2.000 "	1.310 "	30.755 "	31.664 "	28.695 "	1.185 "
4004	9.000 "	8	2.500 "	3.000 "	2.630 "	23.518 "	24.228 "	20.458 "	2.505 "
	9.000 "	9	2.500 "	3.000 "	2.630 "	26.314 "	27.227 "	23.254 "	2.505 "
	9.000 "	10	2.500 "	3.000 "	2.630 "	29.125 "	30.199 "	26.065 "	2.505 "
	9.000 "	11	2.500 "	3.000 "	2.630 "	31.945 "	33.151 "	28.885 "	2.505 "
	9.000 "	12	2.500 "	3.000 "	2.630 "	34.773 "	36.088 "	31.713 "	2.505 "
	9.000 "	13	2.500 "	3.000 "	2.630 "	37.607 "	39.014 "	34.547 "	2.505 "
	9.000 "	14	2.500 "	3.000 "	2.630 "	40.446 "	41.932 "	37.386 "	2.505 "
	9.000 "	15	2.500 "	3.000 "	2.630 "	43.288 "	44.842 "	40.228 "	2.505 "
	9.000 "	16	2.500 "	3.000 "	2.630 "	46.132 "	47.746 "	43.072 "	2.505 "
4251	12.000 "	8	2.000 "	1.750 "	1.940 "	31.358 "	30.971 "	29.548 "	1.815 "
	12.000 "	9	2.000 "	1.750 "	1.940 "	35.086 "	34.970 "	33.276 "	1.815 "
	12.000 "	10	2.000 "	1.750 "	1.940 "	38.833 "	38.932 "	37.023 "	1.815 "
	12.000 "	11	2.000 "	1.750 "	1.940 "	42.594 "	42.868 "	40.784 "	1.815 "
	12.000 "	12	2.000 "	1.750 "	1.940 "	46.364 "	46.785 "	44.554 "	1.815 "
	12.000 "	13	2.000 "	1.750 "	1.940 "	50.143 "	50.686 "	48.333 "	1.815 "
	12.000 "	14	2.000 "	1.750 "	1.940 "	53.928 "	54.575 "	52.118 "	1.815 "
	12.000 "	15	2.000 "	1.750 "	1.940 "	57.717 "	58.456 "	55.907 "	1.815 "
	12.000 "	16	2.000 "	1.750 "	1.940 "	61.510 "	62.328 "	59.700 "	1.815 "


CONTACT US



SCRAPER & ELEVATOR CHAIN SPROCKETS

SCRAPER AND ELEVATOR CHAIN SPROCKETS: APPLICATIONS

-  **Agriculture:** Bulk material handling in silos and processing plants.
-  **Mining:** Efficient transport of minerals and ores.
-  **Construction:** Moving heavy materials and debris.
-  **Waste Management:** Handling waste and recyclables.
-  **Cement and Concrete:** Transporting raw materials and products.

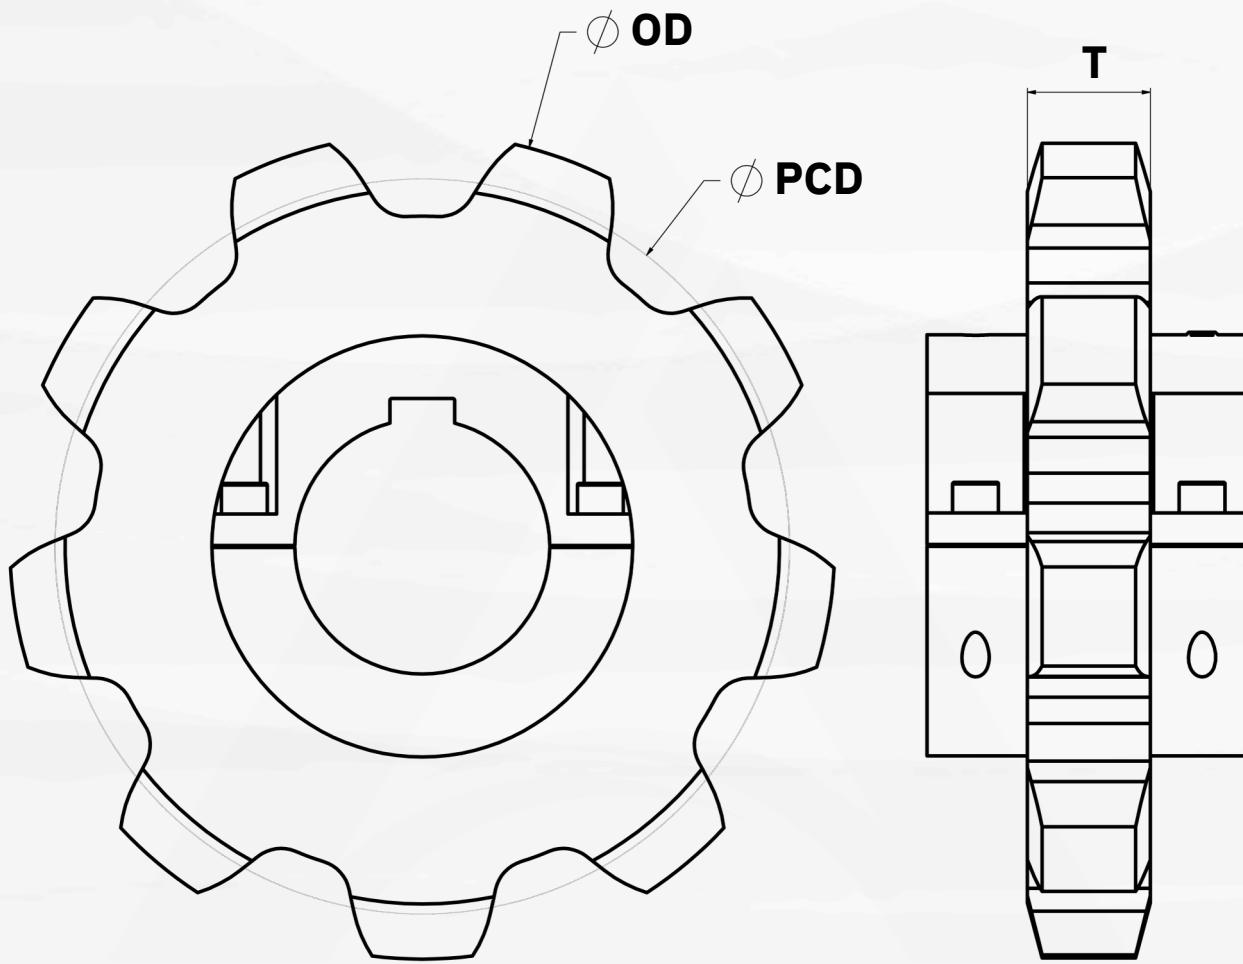

3945 CHAN 9T SPROCKET

CONTACT US




CHAIN NO	P	N	H	RD	G	PCD	OD	BD	T
2111	6.000 "	8	2.000 "	1.880 "	1.560 "	15.679 "	16.485 "	13.739 "	1.435 "
	6.000 "	9	2.000 "	1.880 "	1.560 "	17.543 "	18.485 "	15.603 "	1.435 "
	6.000 "	10	2.000 "	1.880 "	1.560 "	19.416 "	20.466 "	17.476 "	1.435 "
	6.000 "	11	2.000 "	1.880 "	1.560 "	21.297 "	22.434 "	19.357 "	1.435 "
	6.000 "	12	2.000 "	1.880 "	1.560 "	23.182 "	24.392 "	21.242 "	1.435 "
	6.000 "	13	2.000 "	1.880 "	1.560 "	25.071 "	26.343 "	23.131 "	1.435 "
	6.000 "	14	2.000 "	1.880 "	1.560 "	26.964 "	28.288 "	25.024 "	1.435 "
	6.000 "	15	2.000 "	1.880 "	1.560 "	28.858 "	30.228 "	26.918 "	1.435 "
	6.000 "	16	2.000 "	1.880 "	1.560 "	30.755 "	32.164 "	28.815 "	1.435 "
3940	6.000 "	8	2.250 "	1.630 "	2.000 "	15.679 "	16.735 "	13.989 "	1.875 "
	6.000 "	9	2.250 "	1.630 "	2.000 "	17.543 "	18.735 "	15.853 "	1.875 "
	6.000 "	10	2.250 "	1.630 "	2.000 "	19.416 "	20.716 "	17.726 "	1.875 "
	6.000 "	11	2.250 "	1.630 "	2.000 "	21.297 "	22.684 "	19.607 "	1.875 "
	6.000 "	12	2.250 "	1.630 "	2.000 "	23.182 "	24.642 "	21.492 "	1.875 "
	6.000 "	13	2.250 "	1.630 "	2.000 "	25.071 "	26.593 "	23.381 "	1.875 "
	6.000 "	14	2.250 "	1.630 "	2.000 "	26.964 "	28.538 "	25.274 "	1.875 "
	6.000 "	15	2.250 "	1.630 "	2.000 "	28.858 "	30.478 "	27.168 "	1.875 "
	6.000 "	16	2.250 "	1.630 "	2.000 "	30.755 "	32.414 "	29.065 "	1.875 "
9856	6.000 "	8	2.500 "	2.750 "	3.000 "	15.679 "	16.985 "	12.869 "	2.875 "
	6.000 "	9	2.500 "	2.750 "	3.000 "	17.543 "	18.985 "	14.733 "	2.875 "
	6.000 "	10	2.500 "	2.750 "	3.000 "	19.416 "	20.966 "	16.606 "	2.875 "
	6.000 "	11	2.500 "	2.750 "	3.000 "	21.297 "	22.934 "	18.487 "	2.875 "
	6.000 "	12	2.500 "	2.750 "	3.000 "	23.182 "	24.892 "	20.372 "	2.875 "
	6.000 "	13	2.500 "	2.750 "	3.000 "	25.071 "	26.843 "	22.261 "	2.875 "
	6.000 "	14	2.500 "	2.750 "	3.000 "	26.964 "	28.788 "	24.154 "	2.875 "
	6.000 "	15	2.500 "	2.750 "	3.000 "	28.858 "	30.728 "	26.048 "	2.875 "
	6.000 "	16	2.500 "	2.750 "	3.000 "	30.755 "	32.664 "	27.945 "	2.875 "
3945	4.000 "	8	1.500 "	1.250 "	2.000 "	10.453 "	11.157 "	9.143 "	1.875 "
	4.000 "	9	1.500 "	1.250 "	2.000 "	11.695 "	12.490 "	10.385 "	1.875 "
	4.000 "	10	1.500 "	1.250 "	2.000 "	12.944 "	13.811 "	11.634 "	1.875 "
	4.000 "	11	1.500 "	1.250 "	2.000 "	14.198 "	15.123 "	12.888 "	1.875 "
	4.000 "	12	1.500 "	1.250 "	2.000 "	15.455 "	16.428 "	14.145 "	1.875 "
	4.000 "	13	1.500 "	1.250 "	2.000 "	16.714 "	17.729 "	15.404 "	1.875 "
	4.000 "	14	1.500 "	1.250 "	2.000 "	17.976 "	19.025 "	16.666 "	1.875 "
	4.000 "	15	1.500 "	1.250 "	2.000 "	19.239 "	20.319 "	17.929 "	1.875 "
	4.000 "	16	1.500 "	1.250 "	2.000 "	20.503 "	21.609 "	19.193 "	1.875 "
4004	9.000 "	8	2.500 "	3.000 "	2.630 "	23.518 "	24.228 "	20.458 "	2.505 "
	9.000 "	9	2.500 "	3.000 "	2.630 "	26.314 "	27.227 "	23.254 "	2.505 "
	9.000 "	10	2.500 "	3.000 "	2.630 "	29.125 "	30.199 "	26.065 "	2.505 "
	9.000 "	11	2.500 "	3.000 "	2.630 "	31.945 "	33.151 "	28.885 "	2.505 "
	9.000 "	12	2.500 "	3.000 "	2.630 "	34.773 "	36.088 "	31.713 "	2.505 "
	9.000 "	13	2.500 "	3.000 "	2.630 "	37.607 "	39.014 "	34.547 "	2.505 "
	9.000 "	14	2.500 "	3.000 "	2.630 "	40.446 "	41.932 "	37.386 "	2.505 "
	9.000 "	15	2.500 "	3.000 "	2.630 "	43.288 "	44.842 "	40.228 "	2.505 "
	9.000 "	16	2.500 "	3.000 "	2.630 "	46.132 "	47.746 "	43.072 "	2.505 "
4251	12.000 "	8	2.000 "	1.750 "	1.940 "	31.358 "	30.971 "	29.548 "	1.815 "
	12.000 "	9	2.000 "	1.750 "	1.940 "	35.086 "	34.970 "	33.276 "	1.815 "
	12.000 "	10	2.000 "	1.750 "	1.940 "	38.833 "	38.932 "	37.023 "	1.815 "
	12.000 "	11	2.000 "	1.750 "	1.940 "	42.594 "	42.868 "	40.784 "	1.815 "
	12.000 "	12	2.000 "	1.750 "	1.940 "	46.364 "	46.785 "	44.554 "	1.815 "
	12.000 "	13	2.000 "	1.750 "	1.940 "	50.143 "	50.686 "	48.333 "	1.815 "
	12.000 "	14	2.000 "	1.750 "	1.940 "	53.928 "	54.575 "	52.118 "	1.815 "
	12.000 "	15	2.000 "	1.750 "	1.940 "	57.717 "	58.456 "	55.907 "	1.815 "
	12.000 "	16	2.000 "	1.750 "	1.940 "	61.510 "	62.328 "	59.700 "	1.815 "

CONTACT US



DROP FORGED RIVETLESS CHAIN SPROCKETS

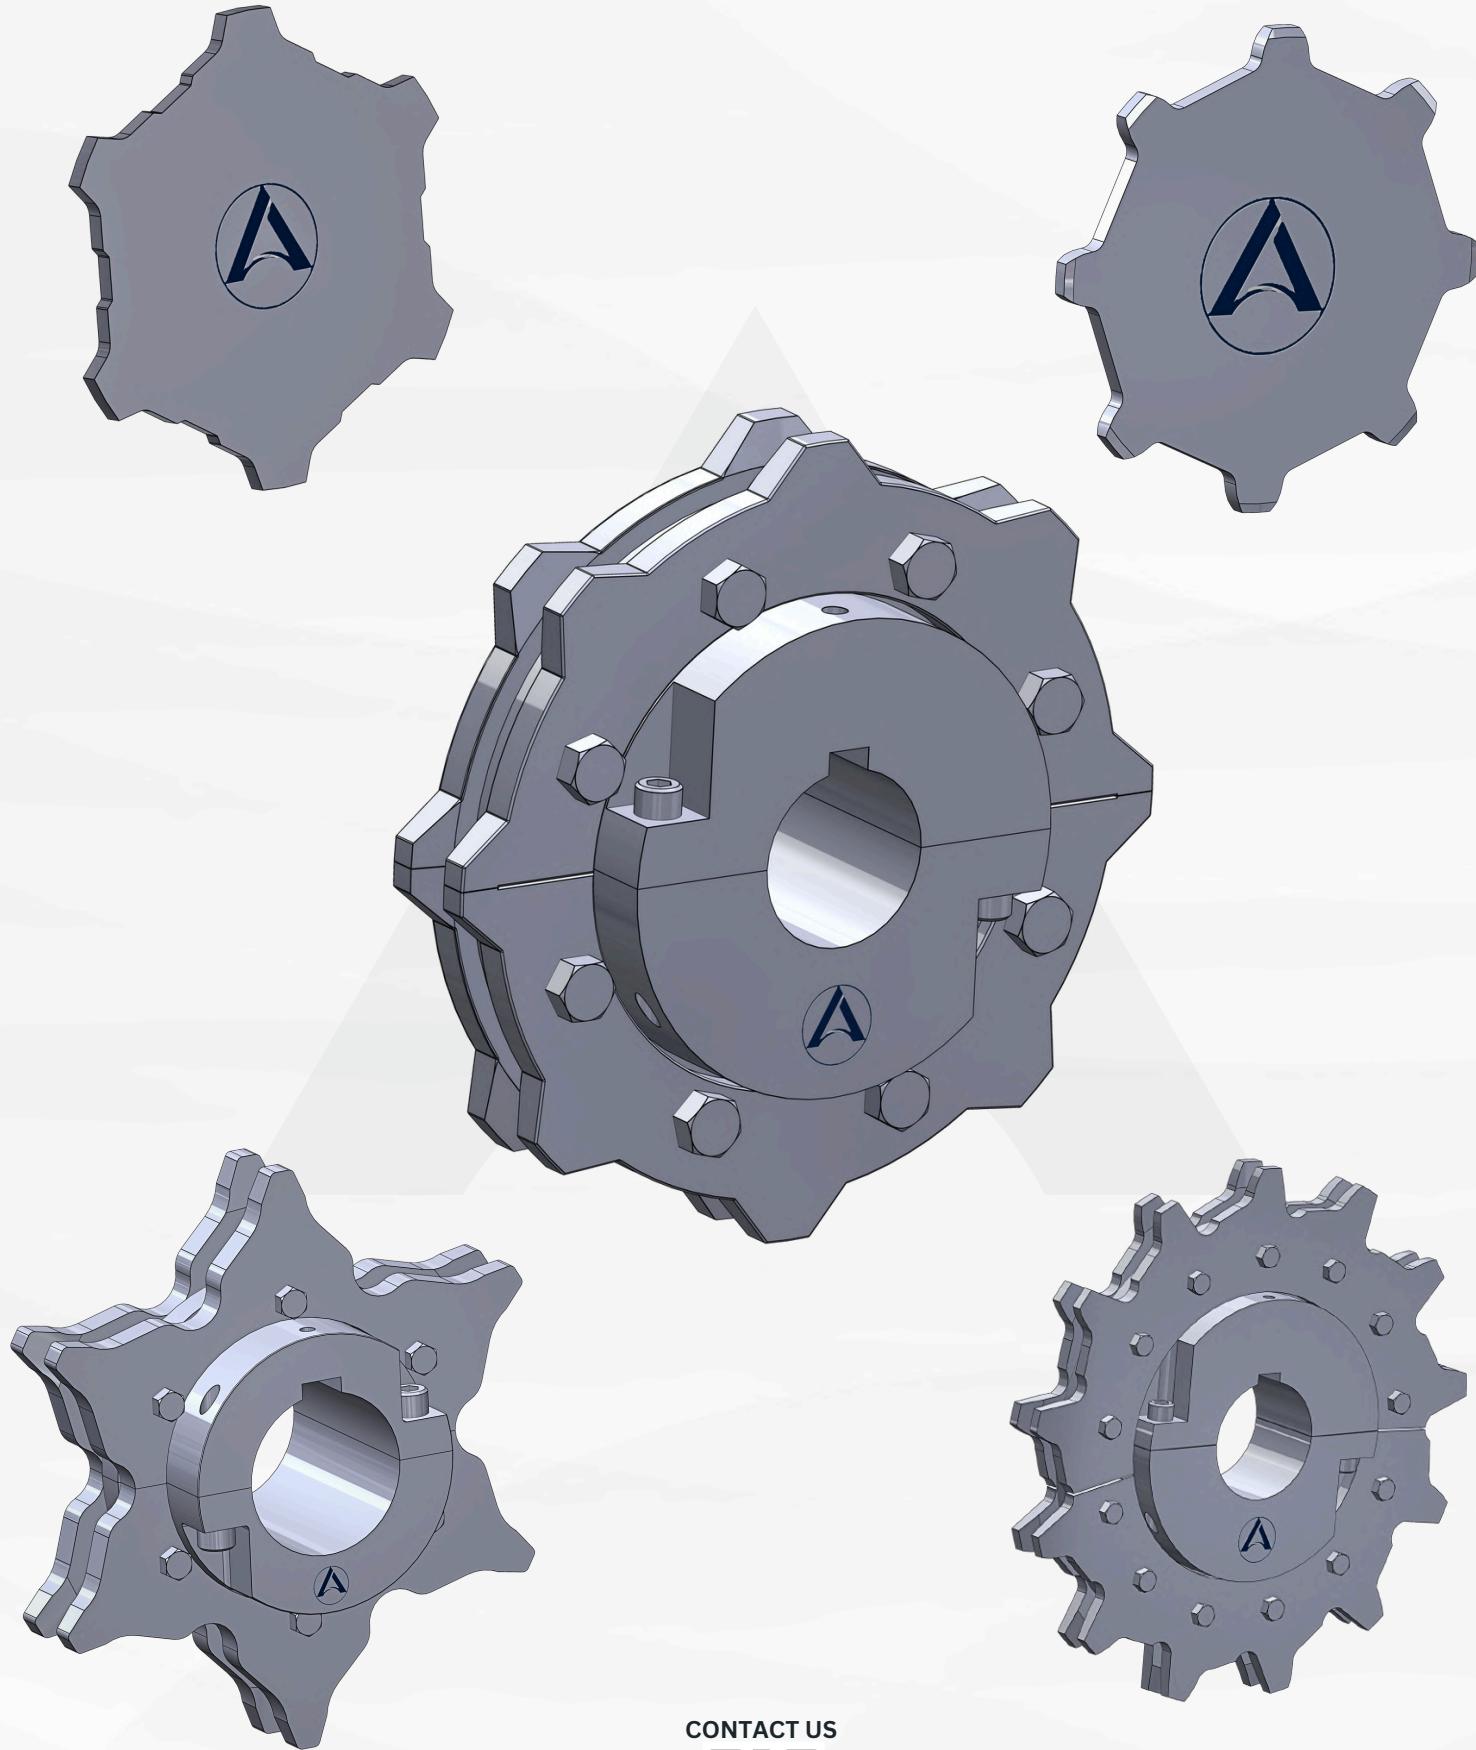

CONTACT US



DROP FORGED RIVETLESS CHAIN SPROCKETS

Drop-Forged Rivetless Chain Sprockets Applications:

- **Mining:** Handles heavy ore and material loads.
- **Steel Production:** Supports high-speed conveyors in demanding environments.
- **Automotive:** Efficient in high-torque applications and heavy-duty material handling.



Forged Link Chain Sprockets Applications:

- **Mining:** Durable for abrasive material handling and tough conditions.
- **Cement:** Robust for heavy-duty conveyor systems in cement production.
- **Waste Management:** Reliable in handling large, heavy waste materials.

We offer sprockets for drop-forged Rivetless chains in two tooth forms:

- **Form A:** Curved tooth face for smooth and efficient engagement.
- **Form B:** Straight tooth face for durability and precision.

Our drop-forged Rivetless chains provide seamless, robust performance, making them ideal for demanding applications. Choose the sprocket form that best suits your needs for optimal operation and longevity

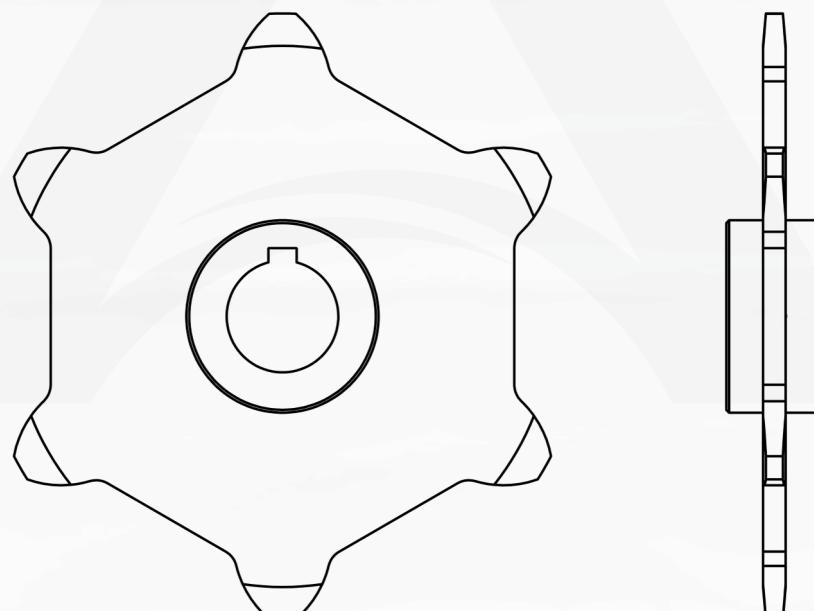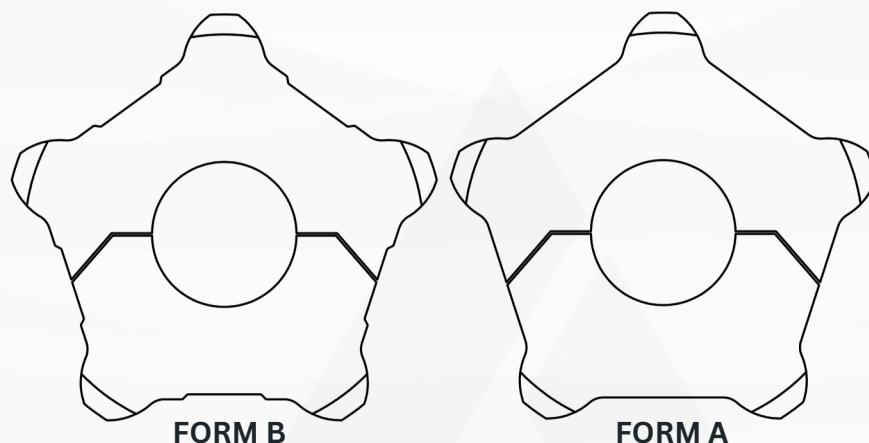

CONTACT US



FORGED LINK CHAIN SPROCKETS


Forged Link Chain Sprockets Applications:

- **Mining:** Durable for abrasive material handling and tough conditions.
- **Cement:** Robust for heavy-duty conveyor systems in cement production.
- **Waste Management:** Reliable in handling large, heavy waste materials.


We offer sprockets and Traction rim for drop-forged chains in various forms:

- **Symmetrical Sprockets:** Balanced tooth profile for smooth operation.
- **Asymmetrical Sprockets:** Custom designs for specific applications.
- **Star Idler Sprockets:** Specialized tooth patterns for unique needs.




Our drop-forged chains sprockets provide seamless, robust performance, making them ideal for demanding applications. Choose the sprocket form that best suits your needs for optimal operation and longevity

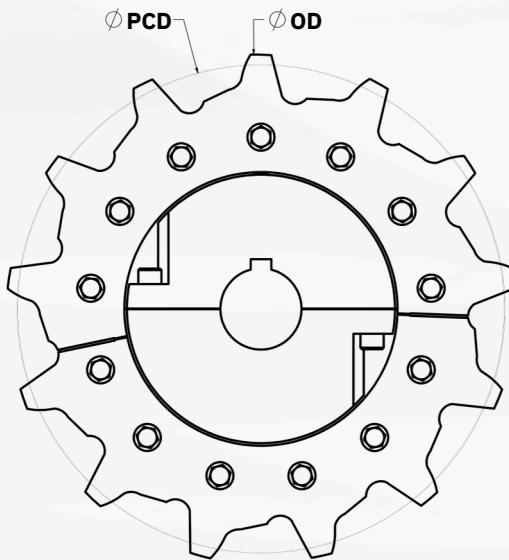

ASYMMETRICAL




REVERSIBLE SYMMETRICAL

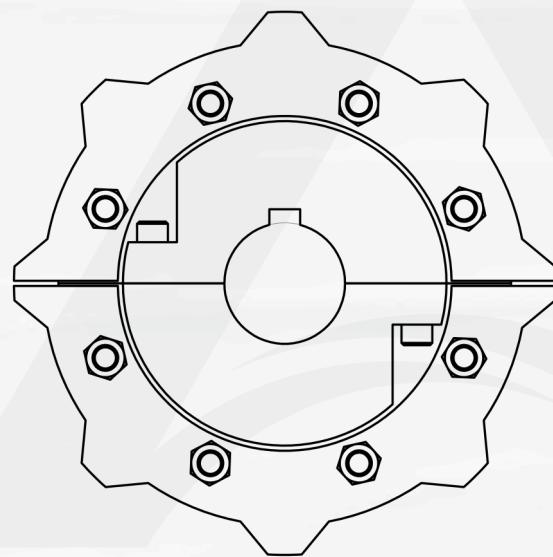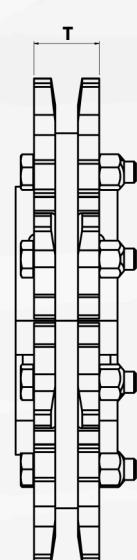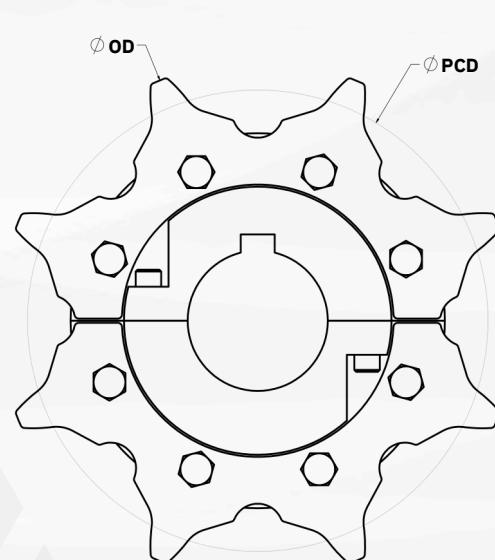

“STAR” TRAILER IDLER WHEEL

CONTACT US



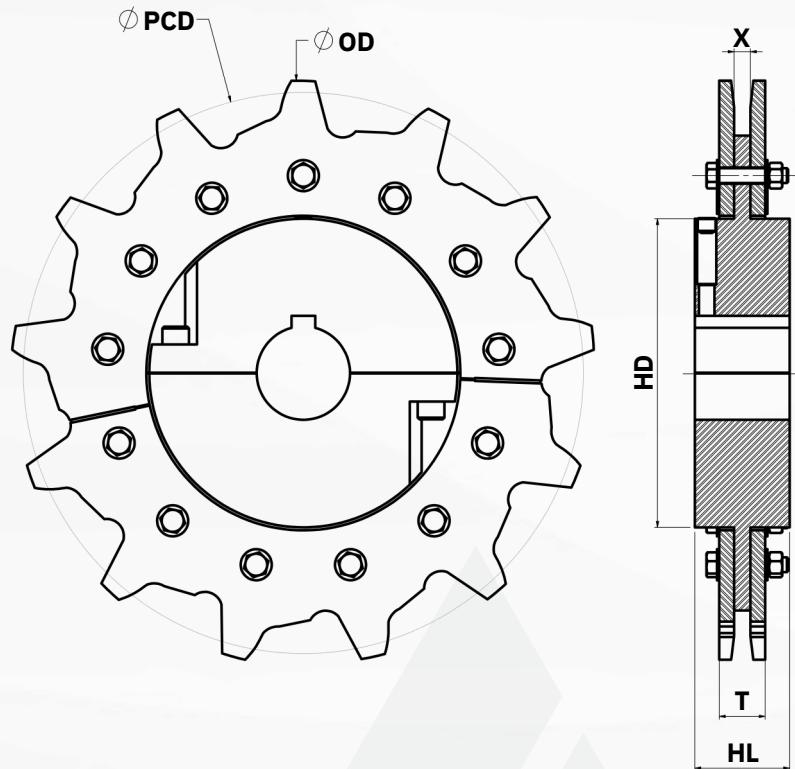

CHAIN NO	N	PCD	OD	HD (MAX)	T	X	HL
101 STD	6	8.000 "	8.504 "	4.000 "	1.339 "	0.394 "	4.000 "
101 STD	8	10.452 "	10.906 "	5.000 "	1.339 "	0.394 "	4.000 "
101 STD	10	12.944 "	13.386 "	7.000 "	1.339 "	0.394 "	5.000 "
101 STD	12	15.455 "	15.906 "	8.000 "	1.339 "	0.394 "	5.000 "
101 STD	14	17.976 "	18.425 "	8.000 "	1.339 "	0.394 "	6.000 "
101 STD	6	8.000 "	8.504 "	4.000 "	1.417 "	0.472 "	4.000 "
101 STD	8	10.452 "	10.906 "	5.000 "	1.417 "	0.472 "	4.000 "
101 STD	10	12.944 "	13.386 "	7.000 "	1.417 "	0.472 "	5.000 "
101 STD	12	15.455 "	15.906 "	8.000 "	1.417 "	0.472 "	5.000 "
101 STD	14	17.976 "	18.425 "	8.000 "	1.417 "	0.472 "	6.000 "
142 STD	6	11.181 "	11.969 "	5.000 "	1.772 "	0.591 "	4.000 "
142 STD	7	12.886 "	13.543 "	6.000 "	1.772 "	0.591 "	4.000 "
142 STD	8	14.609 "	15.354 "	8.000 "	1.772 "	0.591 "	5.000 "
142 STD	9	16.346 "	17.126 "	9.000 "	1.772 "	0.591 "	6.000 "
142 STD	10	18.091 "	18.898 "	9.000 "	1.772 "	0.591 "	6.000 "
142 STD	11	19.843 "	20.630 "	12.000 "	1.772 "	0.591 "	10.000 "
142 STD	12	21.600 "	22.441 "	12.000 "	1.772 "	0.591 "	10.000 "
142 STD	13	23.361 "	24.173 "	14.000 "	1.772 "	0.591 "	12.000 "
142 STD	14	25.124 "	25.984 "	14.000 "	1.772 "	0.591 "	12.000 "
142 STD	15	26.885 "	27.638 "	14.000 "	1.772 "	0.591 "	12.000 "
142 STD	16	28.657 "	29.449 "	2.000 "	1.772 "	0.591 "	12.000 "

CONTACT US



CHAIN NO	N	PCD	OD	HD (MAX)	T	X	HL
142HVY	6	11.181 "	11.969 "	5.000 "	2.362 "	0.787 "	5.000 "
142HVY	7	12.886 "	13.543 "	6.000 "	2.362 "	0.787 "	5.000 "
142HVY	8	14.609 "	15.354 "	8.000 "	2.362 "	0.787 "	5.000 "
142HVY	9	16.346 "	17.126 "	9.000 "	2.362 "	0.787 "	6.000 "
142HVY	10	18.091 "	18.898 "	9.000 "	2.362 "	0.787 "	6.000 "
142HVY	11	19.843 "	20.630 "	12.000 "	2.362 "	0.787 "	10.000 "
142HVY	12	21.600 "	22.441 "	12.000 "	2.362 "	0.787 "	10.000 "
142HVY	13	23.361 "	24.173 "	14.000 "	2.362 "	0.787 "	12.000 "
142HVY	14	25.124 "	25.984 "	14.000 "	2.362 "	0.787 "	12.000 "
142HVY	15	26.885 "	27.638 "	14.000 "	2.362 "	0.787 "	12.000 "
142HVY	16	31.413 "	29.449 "	10.000 "	2.362 "	0.787 "	12.000 "
216 STD	6	17.039 "	18.071 "	7.000 "	2.559 "	0.984 "	5.000 "
216 STD	7	19.636 "	20.669 "	7.000 "	2.559 "	0.984 "	5.000 "
216 STD	8	22.263 "	23.307 "	12.000 "	2.559 "	0.984 "	10.000 "
216 STD	9	24.910 "	25.945 "	14.000 "	2.559 "	0.984 "	12.000 "
216 STD	10	27.570 "	28.583 "	14.000 "	2.559 "	0.984 "	12.000 "
160 STD	6	12.598 "	13.465 "	6.000 "	2.559 "	0.984 "	5.000 "
160 STD	8	16.461 "	17.323 "	7.000 "	2.559 "	0.984 "	5.000 "
160 STD	10	20.385 "	21.260 "	12.000 "	2.559 "	0.984 "	10.000 "
200 STD	8	20.567 "	21.496 "	12.000 "	2.559 "	0.984 "	10.000 "
200 STD	10	25.488 "	26.457 "	14.000 "	2.559 "	0.984 "	12.000 "
200 STD	12	30.425 "	31.378 "	14.000 "	2.559 "	0.984 "	12.000 "
260 STD	8	26.748 "	27.913 "	14.000 "	3.228 "	1.260 "	12.000 "
260 STD	10	33.125 "	34.252 "	16.000 "	3.228 "	1.220 "	14.000 "
260 STD	12	39.550 "	40.748 "	20.000 "	3.228 "	1.260 "	16.000 "

CONTACT US



www.agamus.ca



sales@agamus.ca

MINNING CHAIN SPROCKETS

Mining Sprockets for Long-Link Chains

Our mining sprockets for long-link chains are designed to withstand the toughest conditions and provide dependable performance. Perfect for handling abrasive materials and harsh environments, these sprockets are essential for effective mining operations.

We offer various types of sprockets for long-link chains:


Sprockets with Replaceable Rims: Allow for easy replacement of worn rims, extending the lifespan of the sprocket and reducing maintenance costs.

Replaceable Teeth Sprockets: Feature teeth that can be replaced individually, ensuring continued efficiency and minimizing downtime.


Welded Teeth Sprockets: Available with or without welded chain support, these sprockets offer enhanced durability and strength for demanding applications.

Our long-link chain sprockets are designed for robustness and seamless operation, making them the ideal choice for challenging mining environments. Choose the sprocket type that best fits your needs to achieve optimal performance and longevity.

CHAIN NO	PCD	N	X	T	HL
14X50	10.079 "	8	0.591 "	1.772 "	4.000 "
14X50	11.339 "	9	0.591 "	1.772 "	4.000 "
14X50	12.598 "	10	0.591 "	1.772 "	4.000 "
16X64	9.724 "	6	0.709 "	2.126 "	4.000 "
16X64	12.913 "	8	0.709 "	2.126 "	4.000 "
16X64	14.528 "	9	0.709 "	2.126 "	4.000 "
16X64	16.102 "	10	0.709 "	2.126 "	4.000 "
22X86	13.071 "	6	0.984 "	2.795 "	5.500 "
22X86	15.197 "	7	0.984 "	2.795 "	5.500 "
22X86	17.362 "	8	0.984 "	2.795 "	5.500 "
22X86	21.654 "	10	0.984 "	2.795 "	5.500 "

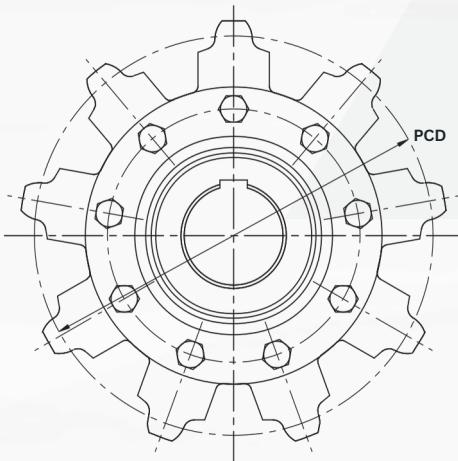


REPLACEABLE RIM SPROCKET

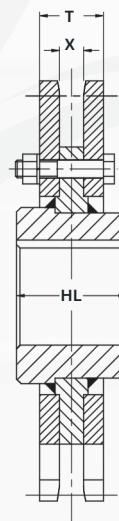


CONTACT US




PROJECTED TEETH SPROCKET WITH
WELDED CHAIN SUPPORT

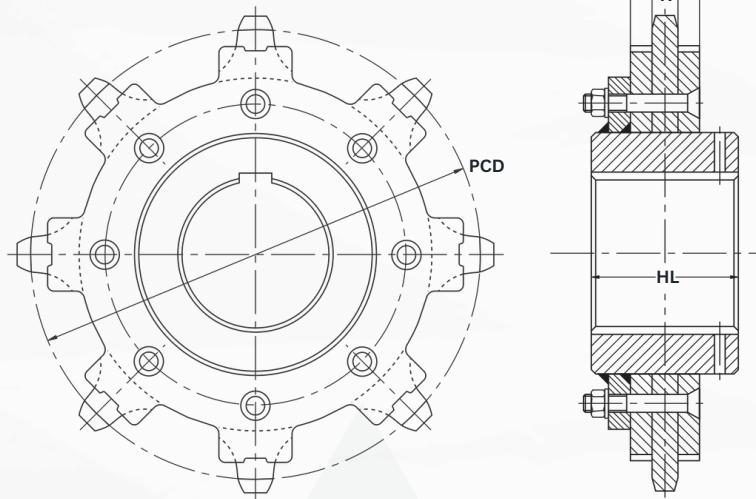

REPLACEABLE RIM & TEETH SPROCKET

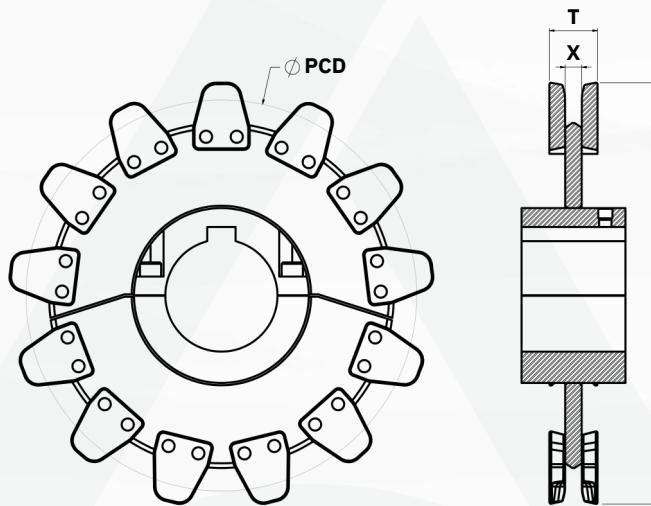

REPLACEABLE TEETH SPROCKET

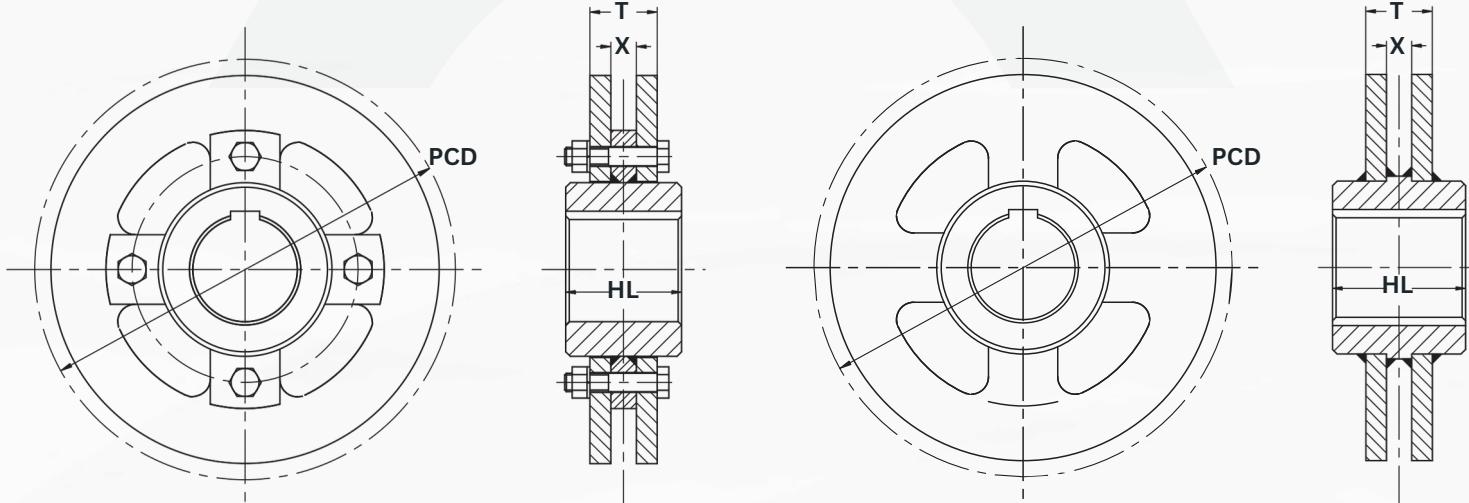

LONG LINK IDLERS

CONTACT US





DRUM SPROCKETS

Agamus AI and Automation Drum sprockets offer high performance and durability. Our drum sprockets come with precise CNC machining, tough forged steel teeth, and customizable options to fit your needs. We ensure fast delivery and reliable sprockets to keep your operations running smoothly.


Types of Drum Sprockets We Offer:

Full-Face Drum Sprocket: Designed with a larger surface area to reduce contact pressure and enhance wear resistance, making it suitable for a wide range of applications.

A-Plate Drum Sprocket: Accommodates more misalignment and enables smooth passage of bulk materials, providing added versatility and strength.

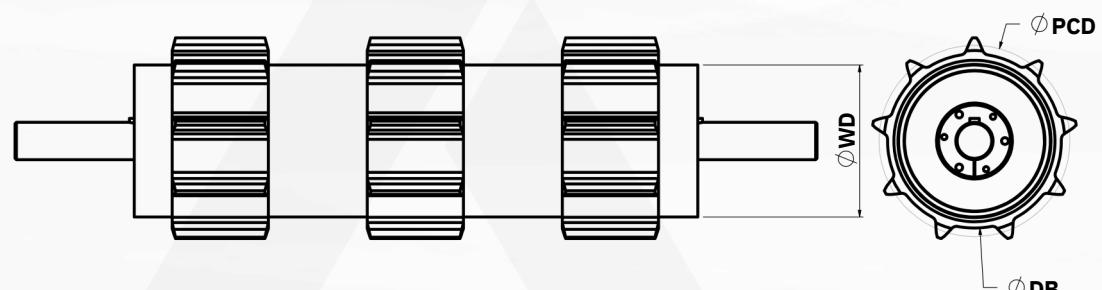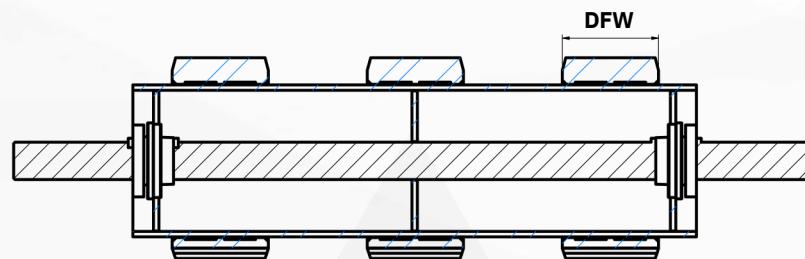

FULL FACE TYPE

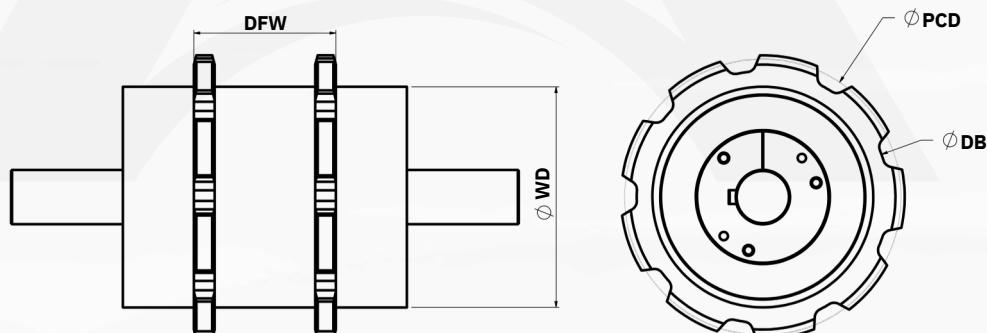

A-PLATE TYPE

CONTACT US



CHAIN NO	N	PCD	DB	D.F.W	WD	H.B	B.B	ST BUSHIN G	ST BORE	QD BUSHIN G	QD BORE	TB SIZE	TB BORE
						MAX	MAX	MAX.	MAX.	MAX.	MAX.	MAX.	MAX.
WD-102	5	8.507 "	6.947 "	6.25 "	4.500 "	3.250 "	2.750 "	R	3.625 "	SF	2.313 "	3030	3.000 "
	6	10.000 "	8.440 "	6.25 "	6.625 "	5.375 "	4.875 "	S	4.188 "	F	3.938 "	3535	3.500 "
	7	11.524 "	9.964 "	6.25 "	8.625 "	6.438 "	5.938 "	U	5.000 "	J	4.500 "	4545	4.500 "
	8	13.066 "	11.506 "	6.25 "	8.625 "	6.438 "	5.938 "	U	5.000 "	N	6.000 "	5050	5.000 "
	9	14.619 "	13.059 "	6.25 "	10.750 "	6.438 "	5.938 "	U	5.000 "	N	6.000 "	5050	5.000 "
	10	16.180 "	14.620 "	6.25 "	12.750 "	6.438 "	5.938 "	W	7.438 "	P	7.000 "	6050	6.000 "
	11	17.747 "	16.187 "	6.25 "	14.000 "	6.438 "	5.938 "	W	7.438 "	P	7.000 "	7060	7.000 "
	12	19.319 "	17.759 "	6.25 "	16.000 "	6.438 "	5.938 "	W	7.438 "	W	8.500 "	8065	8.000 "
	13	20.893 "	19.333 "	6.25 "	18.000 "	6.438 "	5.938 "	W	7.438 "	W	8.500 "	8065	8.000 "
	14	22.470 "	20.910 "	6.25 "	20.000 "	6.438 "	5.938 "	W	7.438 "	S	10.000 "	10085	10.000 "
	15	24.049 "	22.489 "	6.25 "	20.000 "	6.438 "	5.938 "	W	7.438 "	S	10.000 "	10085	10.000 "
WD-120	5	10.208 "	8.148 "	8.750 "	5.563 "	3.250 "	2.750 "	S	4.188 "	F	3.938 "	3535	3.500 "
	6	12.000 "	9.940 "	8.750 "	6.625 "	6.438 "	5.938 "	U	5.000 "	J	4.500 "	4545	4.500 "
	7	13.829 "	11.769 "	8.750 "	8.625 "	6.438 "	5.938 "	U	5.000 "	N	6.000 "	5050	5.000 "
	8	15.679 "	13.619 "	8.750 "	10.750 "	6.438 "	5.938 "	W	7.438 "	N	6.000 "	5050	5.000 "
	9	17.543 "	15.483 "	8.750 "	14.000 "	6.438 "	5.938 "	W	7.438 "	P	7.000 "	6050	6.000 "
	10	19.416 "	17.356 "	8.750 "	16.000 "	6.438 "	5.938 "	W	7.438 "	W	8.500 "	8065	8.000 "
	11	21.297 "	19.237 "	8.750 "	18.000 "	6.438 "	5.938 "	W	7.438 "	W	8.500 "	8065	8.000 "
	12	23.182 "	21.122 "	8.750 "	20.000 "	6.438 "	5.938 "	W	7.438 "	S	10.000 "	10085	10.000 "
	13	25.071 "	23.011 "	8.750 "	22.000 "	6.438 "	5.938 "	W	7.438 "	S	10.000 "	10085	10.000 "
	14	26.964 "	24.904 "	8.750 "	24.000 "	6.438 "	5.938 "	W	7.438 "	S	10.000 "	120100	12.000 "
	15	28.858 "	26.798 "	8.750 "	24.000 "	6.438 "	5.938 "	W	7.438 "	S	10.000 "	120100	12.000 "

CONTACT US



CHAIN NO	N	PCD	DB	D.F.W	WD	H.B	B.B	ST BUSHING	ST BORE	QD BUSHING	QD BORE	TB SIZE	TB BORE
						MAX	MAX	MAX.	MAX.	MAX.	MAX.	MAX.	MAX.
WD-106	5	10.208 "	8.648 "	8.875 "	6.625 "	5.375 "	4.875 "	S	4.188 "	J	4.500 "	4040	4.000 "
	6	12.000 "	10.440 "	8.875 "	8.625 "	6.438 "	5.938 "	U	5.000 "	M	5.500 "	5050	5.000 "
	7	13.829 "	12.269 "	8.875 "	10.750 "	6.438 "	5.938 "	U	5.000 "	N	6.000 "	5050	5.000 "
	8	15.679 "	14.119 "	8.875 "	12.750 "	6.438 "	5.938 "	W	7.438 "	P	7.000 "	5050	5.000 "
	9	17.543 "	15.983 "	8.875 "	14.000 "	6.438 "	5.938 "	W	7.438 "	P	7.000 "	7060	7.000 "
	10	19.416 "	17.856 "	8.875 "	16.000 "	6.438 "	5.938 "	W	7.438 "	W	8.500 "	8065	8.000 "
	11	21.297 "	19.737 "	8.875 "	18.000 "	6.438 "	5.938 "	W	7.438 "	W	8.500 "	8065	8.000 "
	12	23.182 "	21.622 "	8.875 "	20.000 "	6.438 "	5.938 "	W	7.438 "	S	10.000 "	10085	10.000 "
	13	25.071 "	23.511 "	8.875 "	22.000 "	6.438 "	5.938 "	W	7.438 "	S	10.000 "	10085	10.000 "
	14	26.964 "	25.404 "	8.875 "	24.000 "	6.438 "	5.938 "	W	7.438 "	S	10.000 "	120100	12.000 "
WD-480	5	13.610 "	11.550 "	11.125 "	8.625 "	6.438 "	5.938 "	U	5.000 "	N	6.000 "	5050	5.000 "
	6	16.000 "	13.940 "	11.125 "	10.750 "	6.438 "	5.938 "	W	7.438 "	P	7.000 "	5050	5.000 "
	7	18.438 "	16.378 "	11.125 "	14.000 "	6.438 "	5.938 "	W	7.438 "	W	8.500 "	8065	8.000 "
	8	20.905 "	18.845 "	11.125 "	16.000 "	6.438 "	5.938 "	W	7.438 "	W	8.500 "	8065	8.000 "
	9	23.390 "	21.330 "	11.125 "	18.000 "	6.438 "	5.938 "	W	7.438 "	S	10.000 "	10085	10.000 "
	10	25.889 "	23.829 "	11.125 "	22.000 "	6.438 "	5.938 "	W	7.438 "	S	10.000 "	120100	12.000 "
	11	28.396 "	26.336 "	11.125 "	24.000 "	6.438 "	5.938 "	W	7.438 "	S	10.000 "	120100	12.000 "
	12	30.910 "	28.850 "	11.125 "	24.000 "	6.438 "	5.938 "	W	7.438 "	S	10.000 "	120100	12.000 "
	13	33.429 "	31.369 "	11.125 "	30.000 "	6.438 "	5.938 "	W	7.438 "	S	10.000 "	120100	12.000 "
	14	35.952 "	33.892 "	11.125 "	32.000 "	6.438 "	5.938 "	W	7.438 "	S	10.000 "	120100	12.000 "
	15	38.478 "	36.418 "	8.875 "	34.000 "	6.438 "	5.938 "	W	7.438 "	S	10.000 "	120100	12.000 "


CONTACT US



SPECIAL CATEGORY SPROCKETS


Gap Tooth Sprockets

Our Gap Tooth Sprockets are perfect for chains with rods or rollers positioned at mid-pitch. Ideal for conveyors or drives that reverse direction and where a bit of play is needed, these sprockets come with the necessary pitch line clearance for smooth operation.

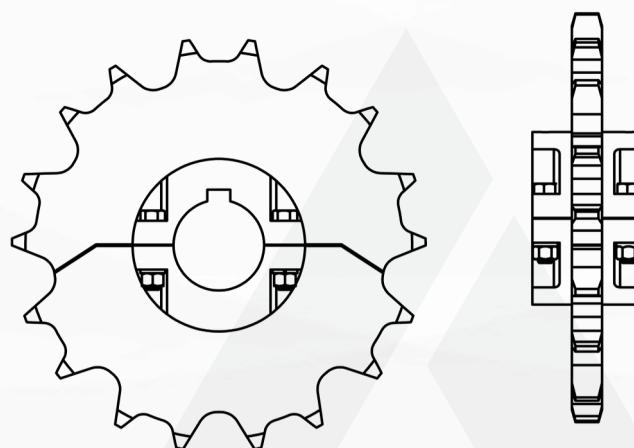

Half-Pitch Sprocket:

Featuring an odd number of teeth with each tooth spaced at half the chain pitch, this sprocket causes the chain to move forward by half a pitch with each turn. This alternation of contact points extends the lifespan of the sprocket by effectively doubling it.

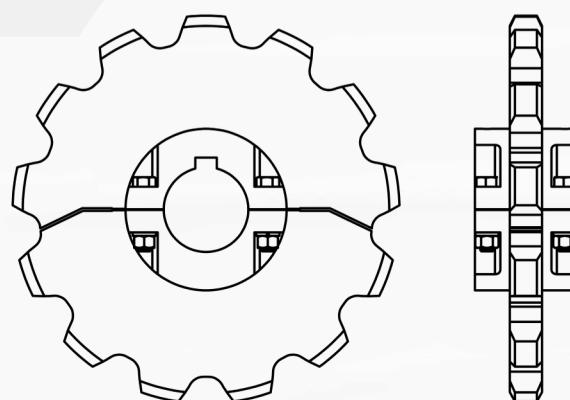


CONTACT US



Clinker Drag Chain Sprockets

Our Clinker Drag Chain Sprockets are built to handle the most abrasive and high-temperature conveying environments. They feature a reduced bottom diameter on the head sprocket to provide clearance for barrel attachments. Additionally, tail sprockets are equipped with octagonal wheels to ensure durability and performance.

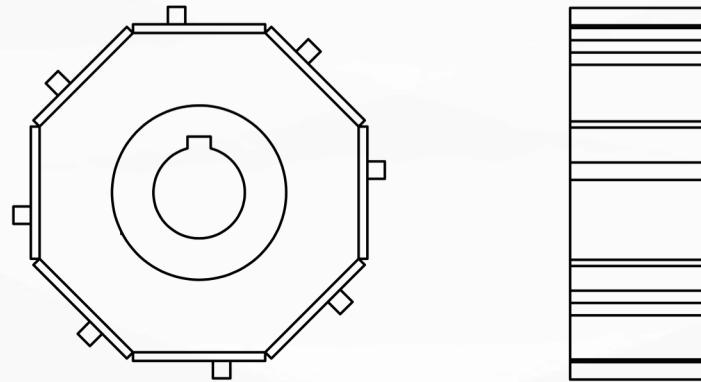

**SCAN TO GET
YOUR QUOTE**



AGAMUS AI & AUTOMATION
404 - 1688, 152 Street Surrey,
V4A 4NB, BC
 Canada

sales@agamus.ca

www.agamus.ca