

Internet of Things — Project Proposal

GreenWave EMS

Smart Green Wave Emergency Management System

Hybrid IoT Architecture for Smart Traffic Light Management in Smart Cities

Created by

G. Innocenti (5299405) & **A. Scarpulla** (5231799)

Academic Year 2025/2026

What is GreenWave EMS?

Problem

Traditional, static, and non-reactive intersections"

During emergencies, passive road infrastructure forces ambulances to navigate critical obstacles:

- Blocking red lights
- Queued traffic
- Unaware crossing pedestrians

Solution

Intelligent and dynamic road infrastructure

GreenWave EMS transforms the road into an active and communicative system to ensure maximum safety:

- Real-time detection
- Temporary cycle variation
- Creation of a safe "green wave"



The Operational Sequence of GreenWave EMS

The Scenario

Intersection Criticality

Active Emergency: An ambulance must cross the city in the shortest possible time.

Static & dynamic obstacles:

- Blocking red lights
- Traffic and waiting queues
- Crossing pedestrians

Pre-emption

Sequential Logic

1 Detection & Transmission

Constant GPS telemetry sent via MQTT protocol.

2

Threshold Verification

Node-RED receives data and calculates the distance from the intersection.

3

Green Wave

Temporary activation and MQTT command to the intersection.

Actuation & Analysis

Edge Control & LLM Report

Local Security (Edge)

The ESP32 receives the command, validates local security and executes the physical unlock.


Recovery & Logging

Once the ambulance has passed, the intersection returns to normal and the event is logged.


AI Report (LLM)

Intelligent post-event analysis and automatic generation of the operational report.

System Architecture

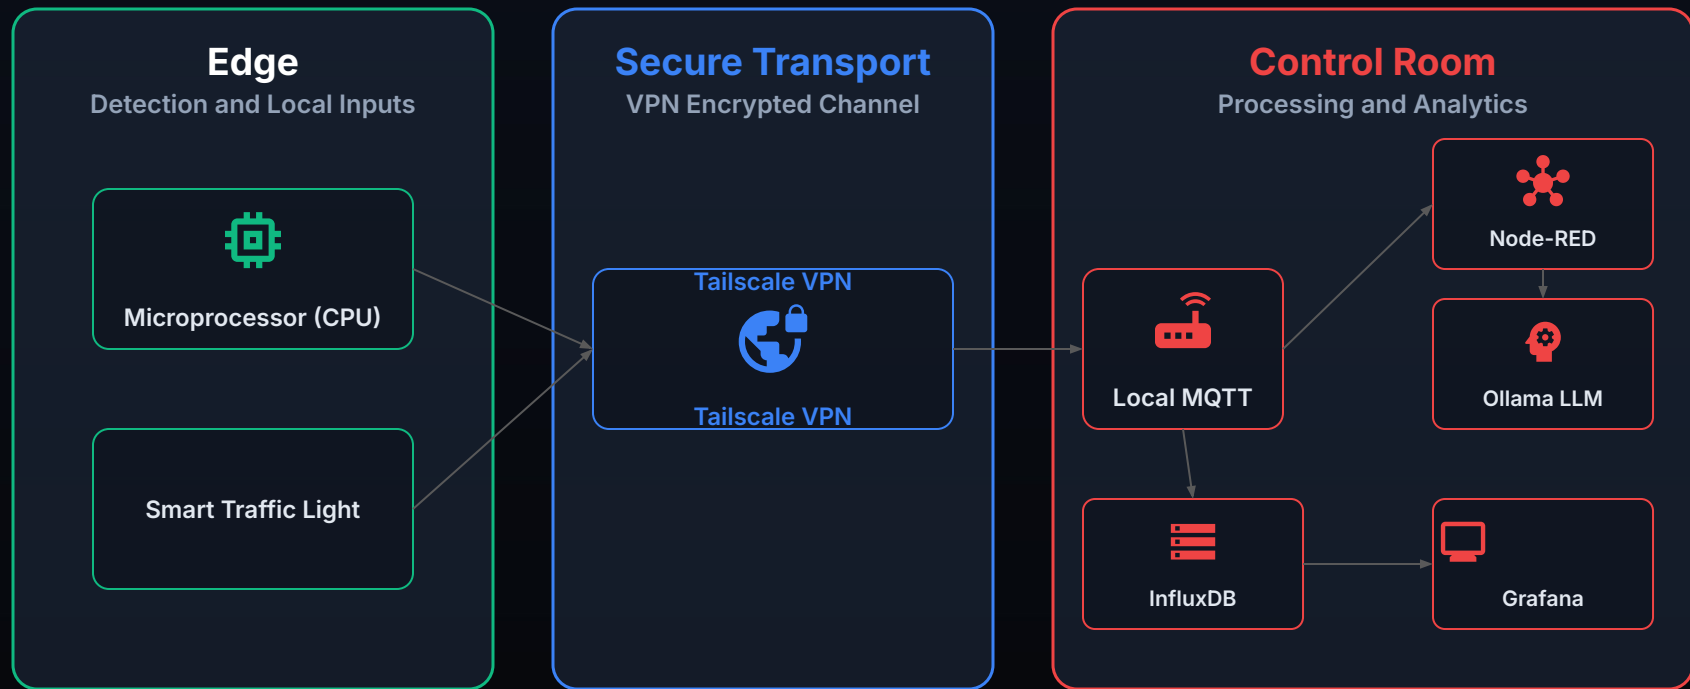

GreenWave EMS Flowchart

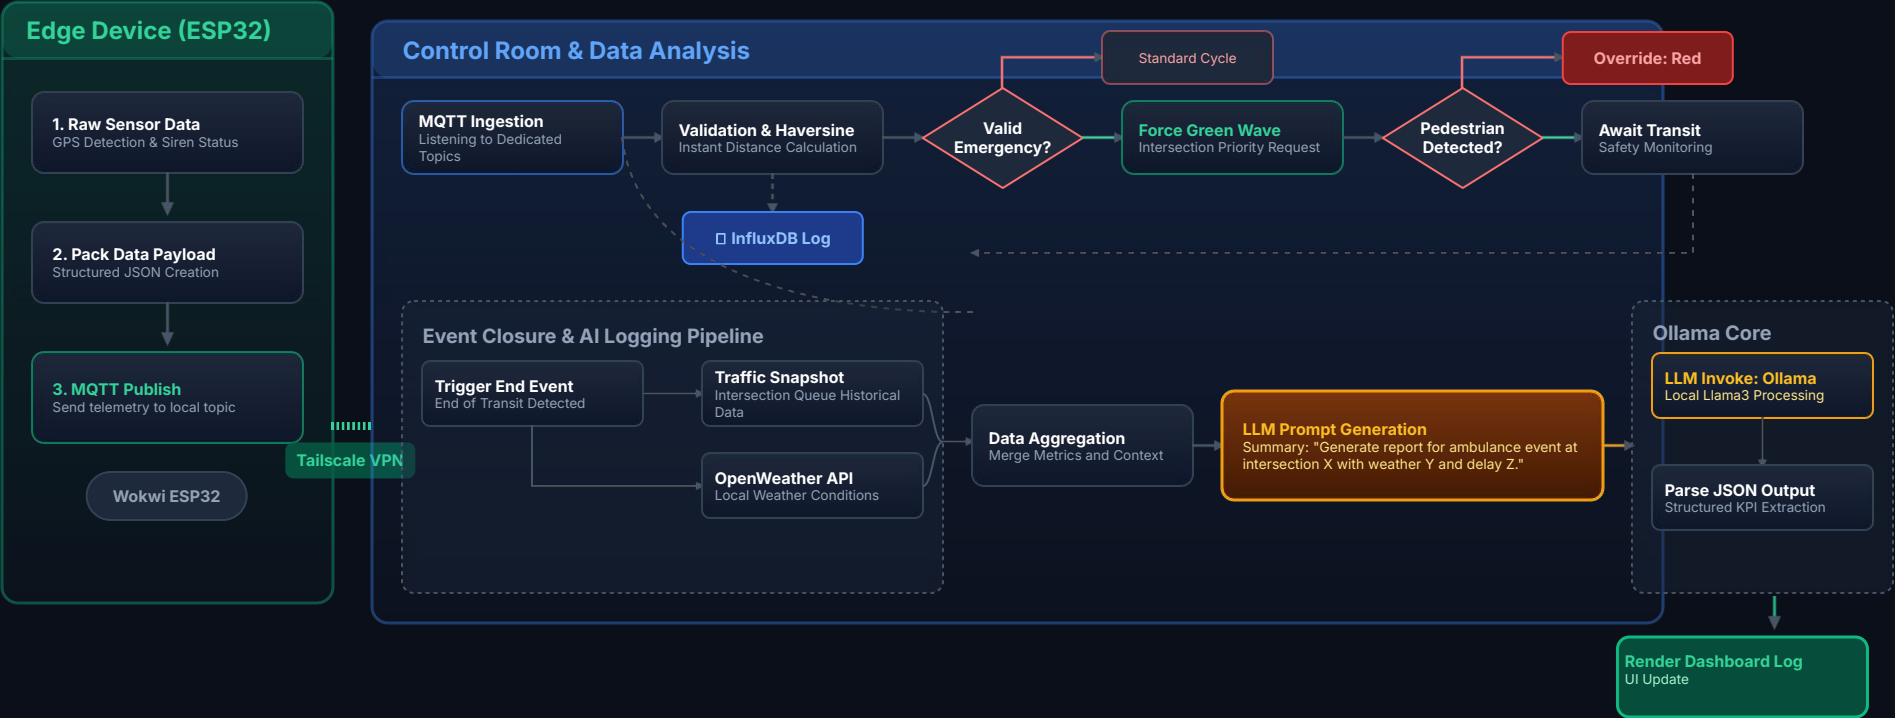

Telemetry Simulation & Node.js IoT

Ambulance Simulator

Node.js Simulation: Replaces physical hardware for dynamic acquisition of GPS and vehicle state.

Real-Time Telemetry: Reproduces the progressive approach to the intersection as a smart sensor.

Spatial Awareness (V2I): Active feedback loop. Listens to the traffic light status and forces an emergency brake (300m threshold) in case of pedestrians.

JSON MESSAGE EXAMPLE

Parameters are serialized into a structured payload ready for transmission:

```
{  
  "latitude": 44.40,  
  "longitude": 8.93,  
  "siren_active": true  
}
```

1. Position calculation



2. Telemetry



3. JSON Serialization



4. Publishing & Listening
(V2I)

Pub/Sub Architecture & MQTT Communication Channels

The MQTT Network Protocol

The choice of **MQTT (Message Queuing Telemetry Transport)** is consistent with the need to decouple data producers and consumers.

The system uses a centralized **MQTT Broker** as an intermediary, eliminating any coupled or direct connection between field devices and the backend.

Topic Segmentation

Using separate channels ensures modularity and security, isolating critical information flows:

■ **Telemetry:** `city/ems/ambulancel/gps`

■ **Commands:** `city/ems/trafficlight1/cmd`

■ **Feedback:** `city/ems/trafficlight1/status`

■ **Traffic:** `city/ems/trafficlight1/queue`



Architectural Advantage: The asynchronous structure **eliminates direct coupling**, making the entire smart city infrastructure highly scalable and maintainable.

Infrastructure Security and Isolation



The Problem: Cloud Simulator Limitations

- **NAT Isolation:** Wokwi Cloud cannot communicate with the local backend behind routers.
- **Zero Security:** Public topics in plain text are interceptable and vulnerable.
- **High Latency:** Inefficient global routing (round-trip from third-party cloud servers) compared to direct peer-to-peer routing between nodes.




The Solution: Local (VS Code) + Tailscale

- Wokwi integrated in **VS Code** entirely locally.
- Edge ESP32 joined in the **Tailscale VPN Mesh** (IP 100.107.9.36).



The Architectural Result

Creation of a **private and encrypted end-to-end tunnel**. The traffic light connects to the Control Center, bypassing the public internet.

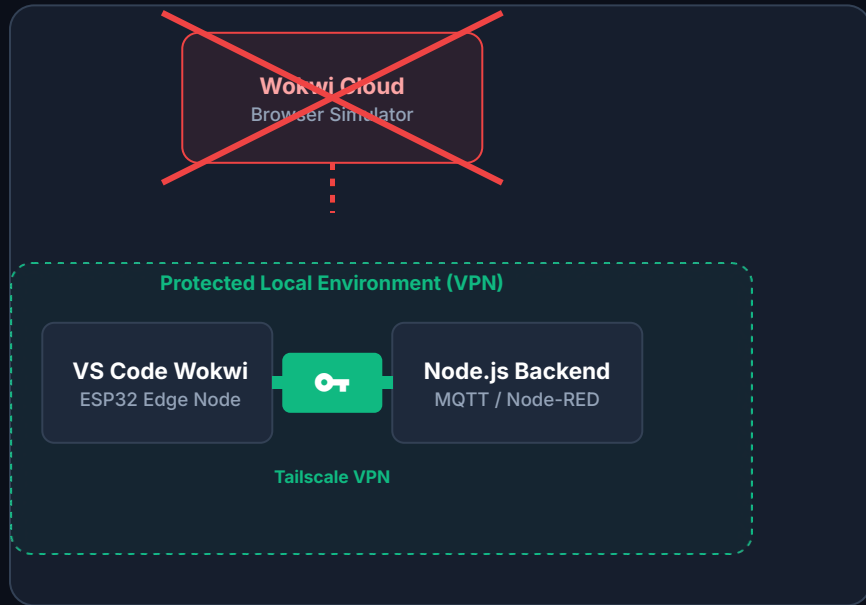

Distributed Network Infrastructure: Secure Tunneling via Tailscale



Operational Challenge



Overcome router NAT obstacles to connect the Edge (Sicily) with the central server (Rapallo) without exposing data on the public internet.

VPN Implementation



Configuration of a peer-to-peer network via Tailscale to join the two development nodes into a single encrypted virtual LAN.

Backend Configuration (Rapallo)



Assignment of static private IP 100.107.9.36 to the Backend infrastructure (Node-RED/Mosquitto) and opening port 1883 on the VPN interface.



Edge Routing (Sicily): Creating a private network to connect Edge and backend without exposing MQTT to the Internet

Smart Intersection & Local ESP32 Safety

ESP32 & Wokwi Simulator

HIL Environment: Fully virtualized Hardware-in-the-Loop simulation on Wokwi.

Core Logic: C++ firmware governed by a **Finite State Machine (FSM)**.

Asynchronous Multitasking: Abandoning blocking *delays* in favor of timers based on `millis()`.

Edge Autonomy: Traffic light cycle and safety guaranteed even in case of central backend disconnection.

Simulated Hardware Components

The barrier and road sensors are fully reproduced:

- **Traffic Light LEDs:** Red, Yellow and Green for flow control.
- **HC-SR04 Sensor:** Ultrasonics for obstacle/queue detection.
- **Servomotor:** Simulates the physical movement of the road barrier.

01

Obstacle Detection
HC-SR04 Sensor



02

Logica di Sicurezza
Elaborazione Local ESP32



03


Local Actuation
LED & Servomotor



04

MQTT Status
Node-RED Feedback

The Edge Node: Perception and Actuation

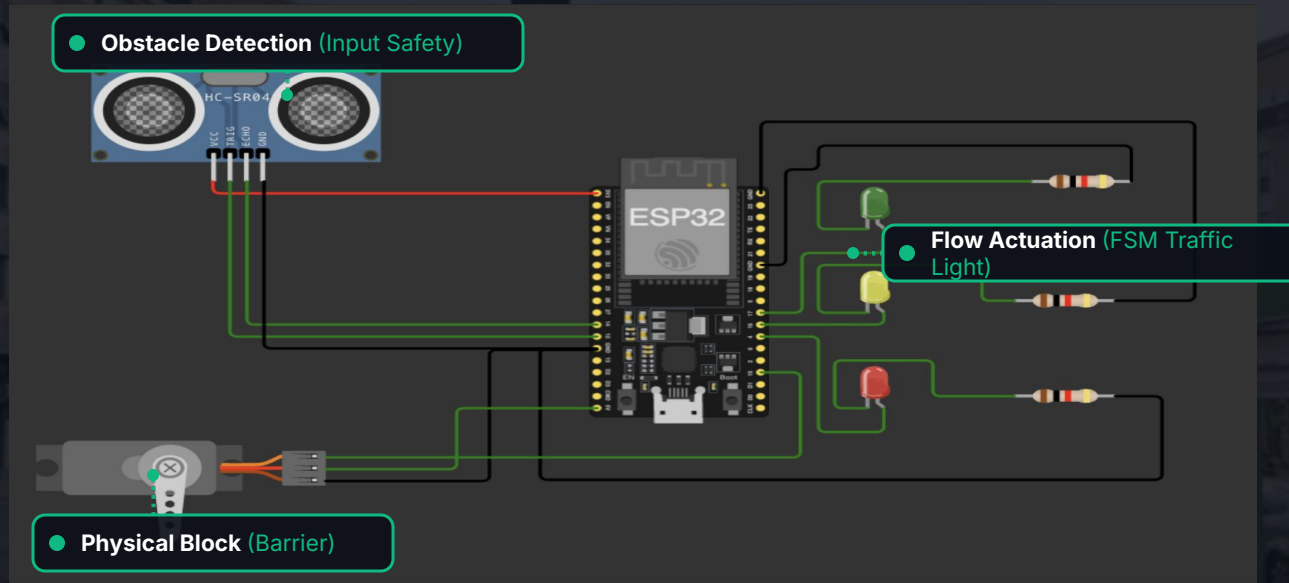

Smart City Architecture: The microcontroller guarantees **local operational continuity** even in the event of temporary network disconnection.

HC-SR04 Ultrasonic Sensor & Edge Decision

Operating Principle

- **Time-of-Flight Technology:** Measures distance by calculating the flight time of the reflected ultrasonic pulse.
- **Edge-Native Processing:** Hardware data does not transit to the Cloud, but is processed instantly at a local level.
- **Specific Target:** Proximity sensor used in the prototype to simulate pedestrian detection in the critical area.

Local Decision Flow

Phase 1: Approach (< 300m)

- ↳ Green Wave request received
- ↳ Safety Check (HC-SR04):
 - └ PEDESTRIAN DETECTED → Safety Abort (Red)
 - └ NO PEDESTRIAN → Activate Green Wave (Green)

Phase 2: Departure (Transit Completed)

- ↳ Safety override release
- ↳ Restoration of normal State Machine (FSM)

01

Pulse Trigger
Ultrasonic Emission



02

Time Measurement
Return Calculation (Echo)



03

Safety Verification
Obstacle Presence Analysis



04

Edge Actuation
Green or Immediate Block

Edge Computing Paradigm: The final safety decision **does not depend on the backend** , ensuring immediate responsiveness even offline.

SAFETY LOGIC (SAFETY PRIORITY)



1. Green Wave Activation (< 300m)

Vehicle in critical range. If the sensor detects a clear intersection, the ESP32 immediately grants the green light.



2. Safety Abort (Override)

Pedestrian detected. The Edge ignores the Central Backend request and forces a red light, giving absolute priority to life safety.




3. FSM Reset (Post-Transit)

Ambulance passed. The ESP32 deactivates the emergency and restores the normal State Machine to allow traffic to flow.



The ESP32 safety logic acts as a **definitive local fail-safe**, overriding any central automation in the presence of obstacles.

Node-RED

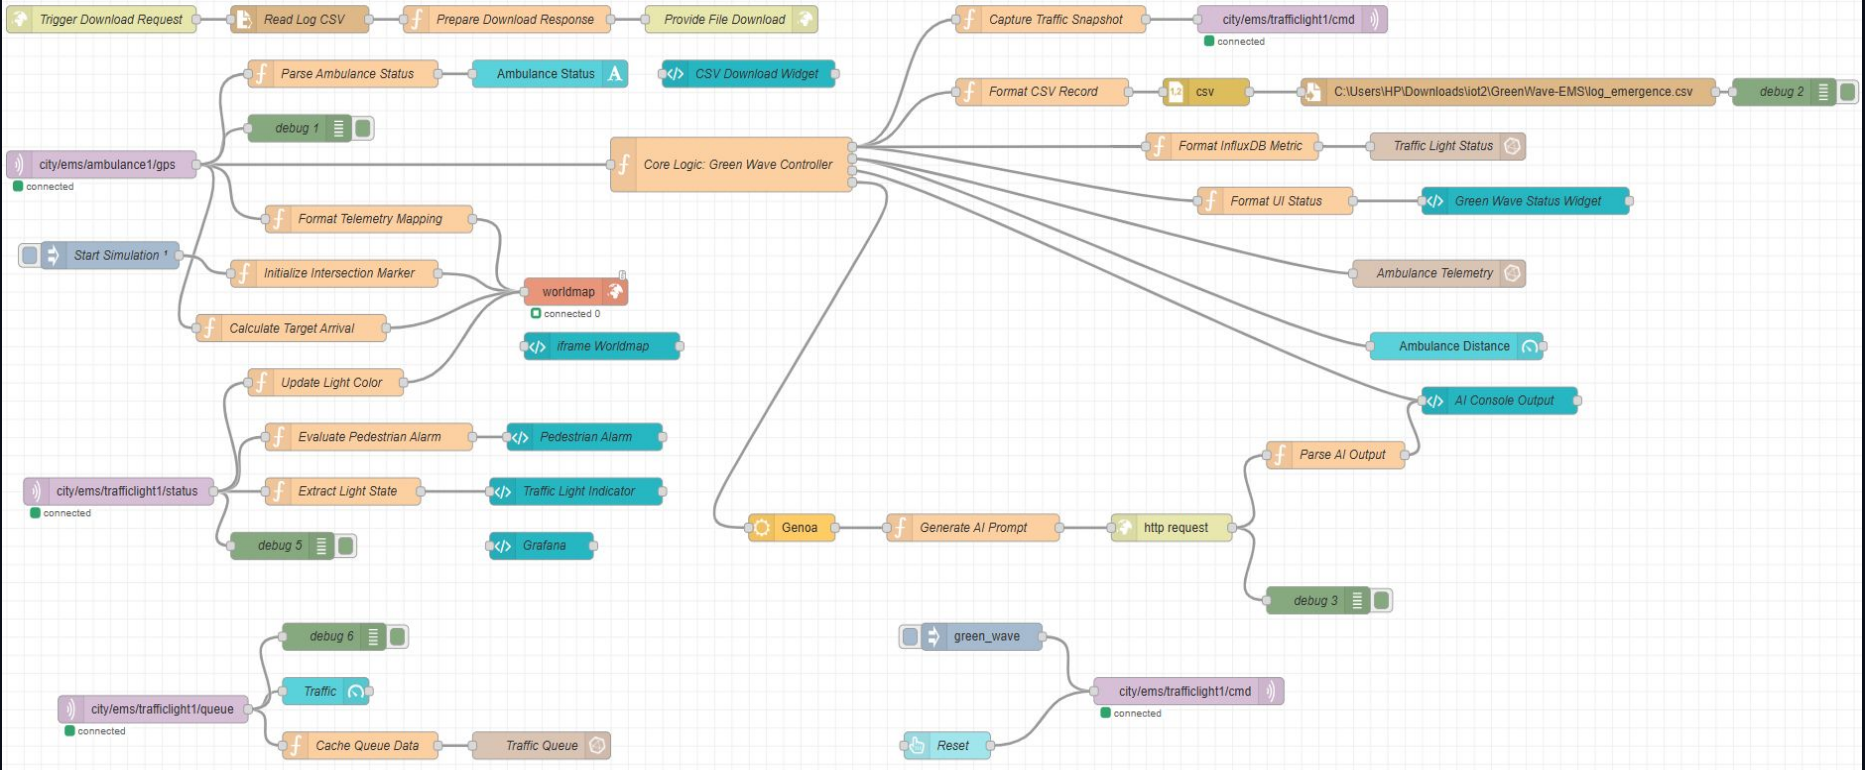

Telemetry Management and Green Wave Activation

1. Reception & Processing

The main flow starts from the MQTT message:

```
city/ems/ambulance1/gps
```

- Real-time position updates
- Map visualization and event logging
- Advanced analytics of vehicle state
- Monitoring of intervention threshold

2. Distance & Threshold Calculation

The distance from the intersection determines the behavior of the local control logic:

- 01** Ambulance Position + Intersection
- 02** Real-time Distance Calculation
- 03** Comparison with Preemption Threshold

Green Wave Automation and Queue Management

1. Automatic Flow

The Green Wave is deterministic, driven exclusively by telemetry.

01

GPS Detection

Ambulance sends position

02

Distance Calculation

Threshold verification on Core Logic

03

Edge Actuation

MQTT command to ESP32

2. Life Cycle & Reset

Prevention of indefinite emergency state lock.



Normal State



Emergency Detected



Crossing & Intersection Reset



Operations Restored

3. Traffic Queue Management

Analysis of Green Wave impact on ordinary vehicle flows via Node-RED.

`city/ems/trafficlight1/queue`

■ Queue & Memory: Local history

■ HTTP Endpoint: Impact analysis

Traffic Reaction and System Adaptation

FSM BASE



1. Ordinary Traffic

In the absence of emergencies, vehicles accumulate and flow following normal traffic light cycles. The system monitors the level of congestion.

GREEN WAVE



2. Preventive Outflow

Forcing the green light not only facilitates emergency services: it serves to **clear the intersection**, clearing the civilian traffic accumulated in front of the ambulance.

ADAPTIVE BALANCING



3. Traffic Impact Monitoring

The system guarantees vital priority to emergency vehicles, while minimizing the risk of critical congestion (gridlock) on Smart City roads.




Dashboard - Control Room

Dashboard emergence

Vehicle Telemetry



Intersection Status

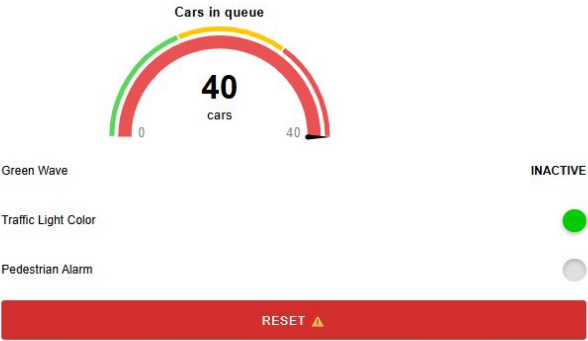


AI Operational Report

AI_OPERATIONAL_CONSOLE


Operational Report:

The successful completion of the emergency response by EMS-1 is attributed to the effective implementation of the "Green Wave" system, which enabled the ambulance to bypass the congestion caused by 8 waiting vehicles, thus facilitating efficient traffic flow. The "Green Wave" system's adaptive routing strategy allowed for a smooth and timely dispatch of the ambulance, ensuring the quickest possible response to the emergency. The current cloudy weather conditions with a temperature of 30.7°C are a contextual factor that did not impact the operation's success.

Tracking GPS

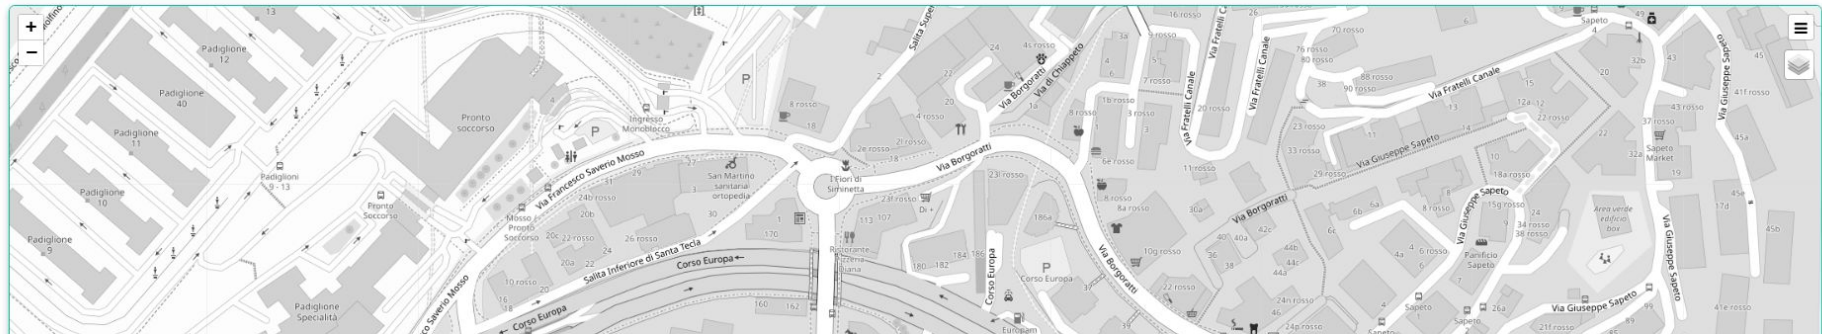

Worldmap Integration

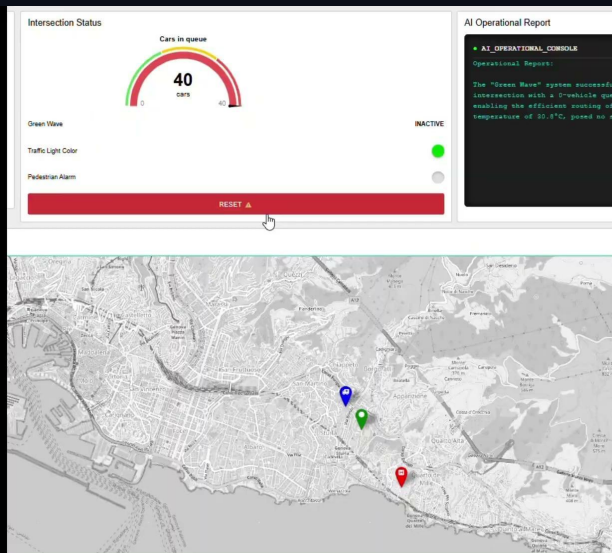

1. Worldmap & Intersection Integration

"Real-time map rendering. The marker dynamically changes color (Green/Red) to reflect the physical state of the traffic light

2. Flashing Lights Animation

The moving ambulance icon visually simulates the activation of the flashing lights, confirming the active emergency state.

3. Target Alerting (Destination Point)

The destination indicator pulses cyclically between red shades, focusing the operator's attention on the finish line



Tactical Control: The interactive map unifies telemetry, traffic light status, and emergency events into a single geospatial interface.

Controllo di Sicurezza e Gestione Anomalie

1. Sicurezza Vita vs. Priorità Mezzo

L'architettura prevede un **Absolute Override**. La richiesta di precedenza dell'ambulanza viene intercettata e messa in pausa dall'algoritmo se i sensori rilevano l'ingombro critico di un pedone, ponendo la sicurezza umana al vertice della gerarchia decisionale.

2. Aggiornamento UI a Cascata

Il sistema garantisce totale trasparenza visiva all'operatore di Control Room. L'eccezione del pedone forza istantaneamente l'indicatore semaforico sul rosso e commuta lo stato dell'Onda Verde in **SOSPESO (PEDONE)**, per poi ripristinarsi in automatico.

3. Acquisizione Metriche (Gauge Traffico)

Il monitoraggio dei veicoli in coda non è solo visivo. Nel momento esatto dell'attraversamento, Node-RED esegue uno **snapshot** (congelamento) del dato; questa metrica reale diventa l'input fondamentale iniettato nel prompt per la refertazione IA.

4. Human-in-the-Loop (Reset Manuale)

Il sistema è Fail-Safe. Un pulsante di emergenza permette all'operatore di eseguire un override manuale (**state clearing**), resettando le variabili globali in caso di falsi positivi dei sensori e restituendo il controllo standard.



Controllo Tattico: Le regole di **gestione delle eccezioni** garantiscono una gerarchia decisionale immutabile dove la tutela della vita umana prevale sull'efficienza della priorità veicolare.

Data Download & History

1. Silent Logging



Automatic backup. At the end of each individual ambulance trip, Node-RED formats the structured data and automatically generates a backup on the server, ensuring history integrity.

2. On-Demand CSV Export



Operator interface. The user maintains full control: by clicking the appropriate button directly from the Dashboard, it is possible to force the retrieval of the CSV file for local offline analysis.

CONSOLE LOGS / TELEMETRY

06/09/2026	17:59:12	Green Wave Activation	Intersection Locked (Ambulance Priority)	0	287
06/09/2026	17:59:30	Emergency End	Normal Cycle Restoration	-	328
06/09/2026	18:00:20	Green Wave Activation	Intersection Locked (Ambulance Priority)	0	287
06/09/2026	18:00:37	Emergency End	Normal Cycle Restoration	-	328

LLM Integration - Contextual Analysis & Reporting

1

JSON & Prompting

Node-RED Orchestration

Node-RED collects emergency telemetry and formats it into a **structured JSON payload**. The package becomes the injected context to query Llama 3.2 via Ollama.

2

Environmental Data

Weather API Integration

The system expands road analysis. Via **OpenWeatherMap**, it retrieves real-time weather conditions, providing the AI with crucial parameters such as rain or low visibility.

3

Operational Report

AI Log Generation

At the end of the Green Wave, the language model crosses technical and weather data, independently drafting an **operational report** in natural language, ready for archiving.

CONSOLE LOGS / AI REPORT GENERATION

I_OPERATIONAL_CONSOLE

Operational Report:

The successful completion of EMS-1's emergency response was facilitated by the effective implementation of the "Green Wave" system, which enabled the ambulance to bypass the congestion caused by 40 waiting vehicles, thus minimizing delay and ensuring efficient transportation of patients to the hospital. This successful execution of the "Green Wave" system is a testament to the thorough planning and coordination between traffic management and emergency services. The clear weather conditions, with a temperature of 4°C, provided optimal conditions for the traffic flow, allowing for the swift resolution of the incident.

AI Operational Report

• AI_OPERATIONAL_CONSOLE

Operational Report:

The successful completion of the emergency response by EMS-1 is attributed to the effective implementation of the "Green Wave" system, which enabled the ambulance to bypass the congestion caused by 8 waiting vehicles, thus facilitating efficient traffic flow. The "Green Wave" system's adaptive routing strategy allowed for a smooth and timely dispatch of the ambulance, ensuring the quickest possible response to the emergency. The current cloudy weather conditions with a temperature of 30.7°C are a contextual factor that did not impact the operation's success.

Grafana - Operations Center



Advantages of the Hybrid Architecture

Simulation

Wokwi

Development and testing of ESP32 without the need for physical hardware.

Modularity

MQTT

Replacement or modification of devices without redesigning the system.

Security

Local

ESP32 maintains safe decisions even in case of backend downtime and also Tailscale and its encryption.

Local AI

Ollama

Language capabilities without dependency on external cloud services.

Architectural Flow



Architecture Legend: **Red** = Edge/Data Source | **Blue** = Broker & Actuators | **Green** = Orchestration & Core Logic | **Purple** = Generative AI Integration

Objects and Technologies Used in the System

Hardware & Edge Simulation

Hardware / Simulated Hardware

- **ESP32:** Microcontroller used as the intersection's Edge Device.
- **HC-SR04:** Ultrasonic sensor for local obstacle detection.
- **LED (Red, Yellow, Green):** Representation of traffic light signals.
- **Servomotor:** Simulation of the physical safety barrier.

Development Environment

- **Wokwi:** Environment used to develop, test, and simulate the ESP32-based smart intersection.

Software, Protocols & Services

Languages & Runtimes

- **Node.js:** Used to simulate the mobile Edge device (ambulance).
- **JavaScript & C++:** Simulator logic, Node-RED nodes, and ESP32 firmware.

Networking & Security

- **Tailscale:** Zero-Trust VPN network for secure connection of distributed nodes.

Communication & Integration

- **MQTT:** Protocol and broker (intermediary) used for asynchronous Pub/Sub messaging between hardware and server.
- **Node-RED:** Central orchestrator and stream processor of the backend.

Visualization & Artificial Intelligence

- **InfluxDB:** Time-Series Database (TSDB) used for persistent storage of high-frequency telemetry.
- **Grafana & Worldmap:** Historical monitoring and GPS geographical tracking.
- **Ollama & LLM:** Local generation of the post-emergency operational report.
- **OpenWeatherMap:** Real-time weather data.

The Four Architectural Levels of the Project

Level 1

Perception

Data acquisition and environment state:

- Simulated GPS
- HC-SR04 Sensor
- Ambulance status
- Traffic detection

Level 2

Transport

Communication and messaging infrastructure:

- MQTT Protocol
- Central broker
- Dedicated topics
- Tailscale

Level 3

Processing

Central logic and data processing:

- Node-RED
- InfluxDB
- Distance calculation
- Green Wave
- Queue management
- Traffic light status
- Logging & data prep
- Ollama & LLM

Level 4

Application

Operator interface and monitoring:

- Operational dashboard
- Worldmap map
- Grafana
- Status visualization
- CSV Export
- Operational report

EDGE & ARCHITETTURA LOCALE

Componenti e Logica del Sistema (Edge-side)



ESP32

Firmware C++ (FSM)

Gestisce i cicli semaforici e l'attuazione fisica in totale autonomia locale.



Sensore HC-SR04

Time-of-Flight

Rilevamento ostacoli.
Innesca il blocco d'emergenza (Safety Abort) ignorando il Cloud.



Node.js

Digital Twin

Digital Twin del mezzo di soccorso. Calcola l'avvicinamento (Haversine) e pubblica la telemetria JSON.



Wokwi & VS Code

Simulatore HIL

Permette il test intensivo e la validazione di codice e circuiti in locale.



Tailscale VPN

Tunnel Crittografato

Connette l'Edge al Backend isolando il traffico dall'internet pubblico.

Componenti backend control



Eclipse Mosquitto

Il Broker MQTT locale.

Agisce come un "casello", ricevendo fisicamente tutti i dati in entrata: coordinate GPS e stato dei semafori.



Node-RED

Il "cervello" e orchestratore.

Contiene la logica di calcolo (Onda Verde, distanze) e ospita la Dashboard web in tempo reale (con nodi custom HTML/CSS e Worldmap).



Ollama (Llama 3.2)

Motore AI locale (LLM).

Interrogato dal sistema per elaborare i dati e generare automaticamente il report operativo a fine emergenza.



InfluxDB

Database Temporale.

Magazzino dove archivia in tempo reale tutta la telemetria, i livelli di traffico e gli eventi dell'ambulanza.



Grafana

Piattaforma Analitica.

Collegata direttamente a InfluxDB per interrogare i dati salvati e mostrare lo storico delle emergenze tramite grafici avanzati.

Future Developments: Towards an Advanced Smart City



1. GNSS RTK & Sensor Fusion

Centimeter-level localization.

Transition to GNSS RTK receivers for 1-2 cm accuracy. Integration with inertial sensors (IMU) ensures smooth distance calculation in urban canyons.



2. Network Expansion

More intersections & vehicles.

Scale the project to cover an entire metropolitan area, extending the service to other emergency categories such as police and fire departments.



3. AI & Predictive Analysis

Advanced tactical support.

ML algorithms predict congestion and optimize routes, while LLM acts as a virtual assistant to query the system in natural language.



Thank you for your attention! **GreenWave EMS**



THE DEVELOPMENT TEAM

The project was entirely conceived, programmed, and simulated by:

**Alessio Scarpulla &
Giorgio Innocenti**

