




Product designation			LED elements	
Product type designation			steady light	
			8LM2TL	
General characteristics				
Colour			Red	
Electrical characteristics				
Rated frequency			Hz	50/60
Supply voltage (AC)			V	12...30
Supply voltage (DC)			V	12...30
Operations				
Electrical life			hours	100000
Mechanical features				
Tightening torque for terminals max			Nm	1
Conductor section				
		AWG/kcmil conductor section		
		max		12
		IEC		
		max		mm ²
				1 or 2 2.5
Mounting adapter			LM2TAU120	
Weight			g	16
Ambient conditions				
Temperature				
		Operating temperature		
		min	°C	-25
		max	°C	+60
		Storage temperature		
		min	°C	-40
		max	°C	+85
Dimensions				



Wiring diagrams

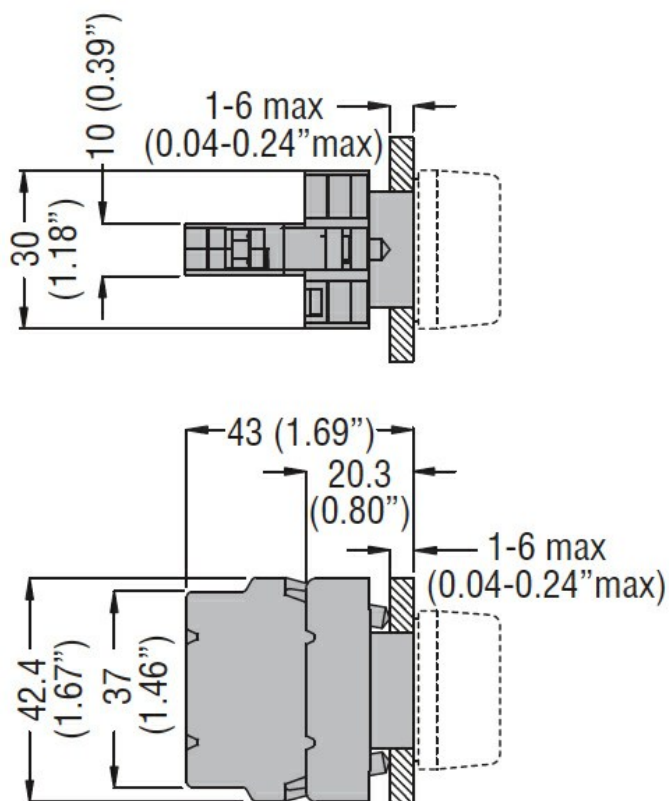

Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN 60947-1
IEC/EN 60947-5-1
UL508

Certificates

CCC
cULus
EAC

ETIM classification

ETIM 8.0

EC000272 -
Indicator light
complete