


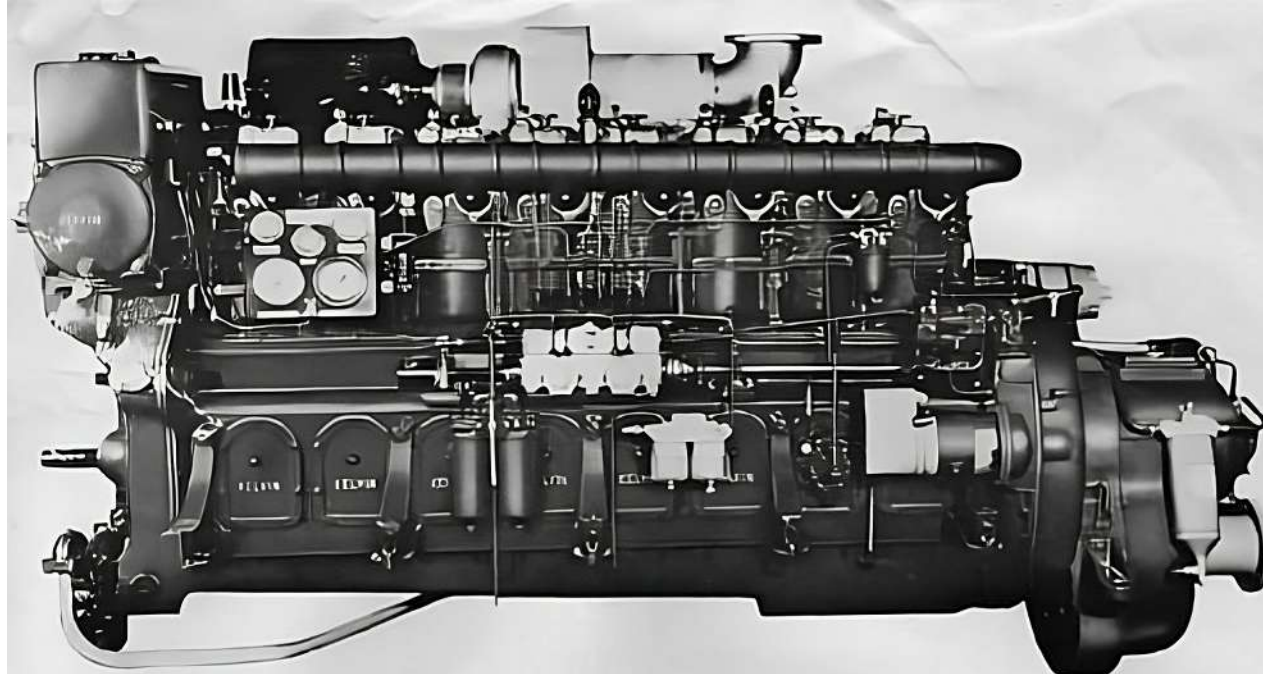

Kelvin TASC8 Marine Diesel

General Information

The 8-cylinder Kelvin TASC8 Marine Diesel Engine operates at a maximum speed of 1200 rpm and is of the 4-stroke cycle, direct injection, cold-starting type. The engine is turbocharged and intercooled and 24-volt electric starting is fitted as standard. Designed primarily as a marine propulsion unit, the TASC8 incorporates a Kelvin RG32 Hydraulic Reverse Reduction Gearbox as an integral part of the engine. Reduction ratios of 2:1, 2½:1 and 3½:1 are available. 4:1 can also be supplied using commercially available reverse reduction gearboxes of all types. Details of engine and gearbox equipment, together with engine dimensions and performance curves are given below and overleaf.

MODEL TASC8 MARINE DIESEL ENGINE—415 shp (440 bhp) at 1200 rpm

Bore	8½ in (165.1 mm)	Stroke	7½ in (184.15 mm)	
Cubic Capacity	1920 in³ (31.2 litres)	Piston Speed	1450 ft/min (7.37 m/sec)	
BMEP	143 psi (10.0 kg/cm²)	Compression Ratio	14:1	
Gear Ratio	Propeller Shaft rpm	Propeller Dia*	Propeller Shaft Dia.	Intermediate Shaft Dia.
2:1	590	42 in (1067 mm)	3½ in (89 mm)	3 in (76 mm)
2½:1	480	50 in (1270 mm)	4 in (102 mm)	3½ in (89 mm)
3½:1	360	62 in (1575 mm)	4½ in (114 mm)	3½ in (89 mm)
4:1	295	70 in (1778 mm)	4½ in (114 mm)	4 in (102 mm)

* Propeller diameters quoted are average figures. Actual diameters may vary by ± 10% depending on the number of blades and design criteria.

Engine and Equipment

TASC8 Marine Diesel Engine, incorporating the following equipment:—

- | | | |
|--|--|---|
| <ul style="list-style-type: none"> 1—Close limit control governor 1—Turbocharger with air inlet filter, exhaust fittings, intercooler and heat shield 2—Feed pumps fitted to fuel pump 1—Fuel filter (changeover type) 1—Water separator 2—Fuel pipes 16 ft 0 in with couplings and tees 1—24 Volt electric starter 1—24 Volt, 58 amp. battery charging alternator with suppression box, control board and fast fuse 1—Engine lub. oil filter 1—Audible and visible alarm panel for low lub. oil pressure and high water temperature | <ul style="list-style-type: none"> 1—Combined lub. oil priming/crank-case emptying pump 1—Oil cooler 1—Instrument panel with fresh water thermometer, engine electric tachometer with engine driven generator, engine lub. oil, gearbox oil and air boost pressure gauges and starter switch 1—High speed auxiliary drive on front-end case with two shaft ends (1½ in and 1¼ in dia.) running constantly at 2.25 x engine speed 1—Pulley shaft, 2½ in dia., on front extension of crankshaft | <ul style="list-style-type: none"> 1—Centrifugal pump for fresh water circulation 1—Rotary impeller gear driven pump for salt water circulation 1—Combined heat exchanger/header tank 1—Thermostat assembly 10—Engine holding-down bolts or studs 10—Engine feet jack screws 30—Engine levelling washers 2—Engine lifting eyes 1—Tool kit complete with small spares, spares list and instruction manual |
|--|--|---|

Gearbox and Equipment

Kelvin RG32 Hydraulic Reverse Reduction Gearbox, incorporating the following equipment:—

- | | |
|---|--|
| <ul style="list-style-type: none"> 1—Reverse Gear Oil Cooler 1—Reverse Gear Oil Filter 1—Output Half Coupling Flange | <ul style="list-style-type: none"> 1—Engine to Gearbox Coupling 6—Shaft Coupling Bolts and Nuts 2—Reverse Gear Holding-Down Bolts |
|---|--|

