



Internet of Things - 089073

Home Automation and Monitoring

*Angelo Claudio Re
Giovanni Scotti*

Professor: Matteo Cesana

Academic Year 2017/2018

Document version: 1.0

Contents

Contents	I
1 Introduction	1
1.1 Purpose	1
1.2 Scope	1
1.3 Definitions, Acronyms, Abbreviations	2
2 System Implementation	3
2.1 Architecture Overview	3
2.2 Configuring and Programming the RPi	4
2.2.1 MQTT	5
2.2.2 Mosquitto	6
2.2.3 Node-RED	7
2.2.4 ThingSpeak	7
2.3 Getting Started with ESP Boards	8
2.3.1 ESP-12E: Sensors, Wiring and Code	8
2.3.2 ESP-32: Sensors, Wiring and Code	13
3 System Deployment	18
3.1 Work Environment Example	18
3.2 Future Extensions	19

Section 1

Introduction

1.1 Purpose

This document is intended to describe a *Home Automation and Monitoring* system, its electronic components as well as its constraints and the interaction with the real world and the end user. A useful example of work environment will be provided to clarify the scope of the system itself and how it can be deployed.

The documentation is full of diagrams, pictures and schematics to let the final user easily implement the infrastructure and take advantage of its countless features.

This document is mainly addressed to computer scientists, IoT enthusiasts, makers and anyone, with some electronics and programming skills, who wants to keep an eye on his/her home and to control devices remotely.

1.2 Scope

The *Home Automation and Monitoring* system aims to offer a smart solution to home automation and monitoring needs. It is intended for those kind of users who want to visualize information about their home, such as temperature or humidity, and control devices remotely.

The system consists mainly of:

- a *back-end*, which is in charge of managing MQTT messaging protocol and runs Node-RED. Data coming from boards provided with sensors and actuators are gathered and sent to a remote service provider to store information into the cloud and to open up further analysis.

- a *front end*, which is offered by a user-friendly and web-accessible Node-RED dashboard that can be easily reached from any device either connected to the same network or to the Internet by means of port forwarding.

The system must be secure. This is why authentication is required in order to access the dashboard. Moreover, MQTT must be secured too and clients provide credentials to the broker to join the network. Last but not least, power consumption has been taken into account: battery-powered boards can enter a deep sleep state after publishing data.

1.3 Definitions, Acronyms, Abbreviations

- **ADC:** Analog to Digital Converter.
- **AP:** wireless Access Point, it allows Wi-Fi devices to connect to a wired network. Usually it is an integral component of routers for home or office use.
- **Back-end:** any device or computer program that remains in the background and offers application logic and communication interfaces to work with the front-end counterpart. It can provide a data access layer.
- **Front-end:** any part of a system the users directly interact with. It provides the so called presentation layer.
- **IoT:** Internet Of Things.
- **LAN:** Local Area Network.
- **MQTT:** Message Queuing Telemetry Transport, a publish-subscribe messaging protocol.
- **System:** the entire infrastructure and all the devices involved in the *Home Automation and Monitoring* project.
- **SoC:** System-On-Chip, an integrated circuit that contains various electronic components designed to work together to achieve a common goal.

Section 2

System Implementation

2.1 Architecture Overview

The overall system architecture is depicted by Figure 2.1.

To begin with, the whole system mainly operates within the user Local Area Network. A wireless router is the central point of the entire infrastructure because all the involved devices are connected to it via wireless communication.

The Raspberry Pi board is the backbone of the back-end processing activities. It is in charge of running Node-RED and acts as MQTT broker. It collects information that are sent out by several WiFi-capable modules taking advantage of the publish-subscribe MQTT connectivity protocol. Each module is provided with sensors that gather information about the surrounding environment.

ESP-12E and ESP-32 NodeMCU are the IoT WiFi boards that have been chosen to design the infrastructure. There exists a great variety of sensors that can be hooked up to these ESP modules and ease of programming via Arduino IDE makes them an appropriate choice too. Moreover, they offer full TCP/IP stack support. Each board does not only publish data, but can also subscribe to a specific topic and receive remote commands to control actuators, such as relays.

The end user is able to visualize a user-friendly, web-accessible dashboard directly from his/her own devices, which must be in the same network of the other system components, in case port forwarding is disabled. The interface is provided by Node-RED development tool. Furthermore, data are forwarded to ThingSpeak by the Raspberry Pi board in order to log them in a remote database and to enable further analysis: ThingSpeak has integrated support from the numerical computing software MATLAB.

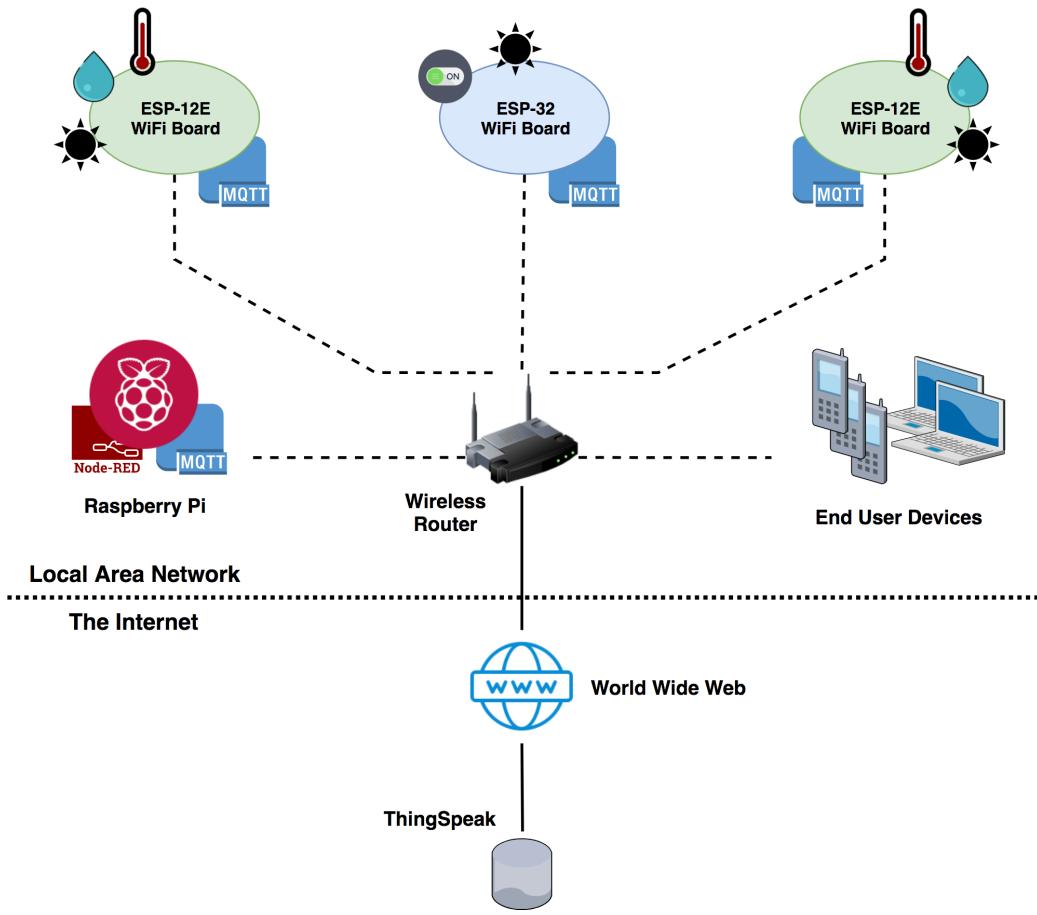


Figure 2.1: System architecture overview. Dashed lines represent wireless communication, solid lines stand for wired connections.

2.2 Configuring and Programming the RPi

The Raspberry Pi is a tiny single-board computer featuring a Broadcom System-On-Chip with an integrated ARM compatible processor. There exist several different generations and models and its role in the system will suit them all. Anyway, using a Pi 3 Model B is highly recommended: it has a quad-core processor and on-board WiFi, Bluetooth and USB boot capabilities which do not require any extra module.

The Raspberry Pi board needs a fresh installation of *Raspbian Stretch*, the official Debian-based Linux operating system developed by the Raspberry Pi Foundation. Other third-party operating systems are not taken into account by this document.

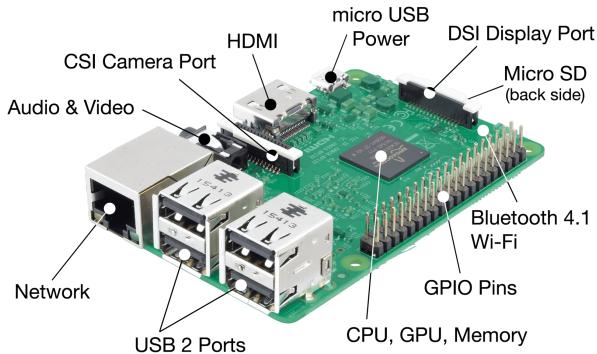


Figure 2.2: Location of connectors and main integrated circuits on the Raspberry Pi 3 Model B.

The board is used as *headless computer*, a device that has been configured to operate without a monitor, keyboard and mouse. The command line is accessed remotely from another computer on the same network using SSH. Since Raspbian has the SSH server disabled by default, it needs to be manually enabled from the desktop or in the terminal via `raspi-config`.

Setting up a static IP address for the Raspberry is strongly recommended. It can be assigned in the DHCP context menu of the wireless router. Since the procedure is different on any device, the router handbook should be referred to.

Before proceeding with the following sections, all the software must be up-to-date. This straightforward operation is carried out by executing the commands below in a terminal window:

```
sudo apt-get update
sudo apt-get upgrade
```

2.2.1 MQTT

MQTT is a lightweight messaging protocol that works on top of TCP/IP. It provides resource-constrained network clients with a simple way to distribute and exchange information. MQTT is based on the publish-subscribe messaging pattern that requires a message broker to work properly: in this case the role perfectly fits the Raspberry Pi board.

Information about a given topic are sent, or published, to a server that behaves as MQTT message broker. Then, the latter pushes the information

out to those clients that have previously subscribed to the above-mentioned topics.

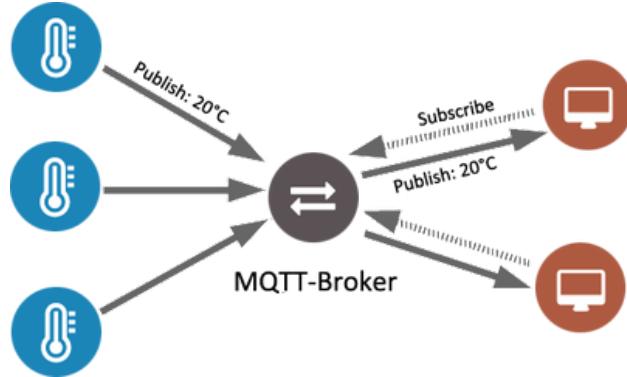


Figure 2.3: The message broker is the central point of the MQTT infrastructure. It receives published information and forwards it to subscribed clients.

MQTT offers three quality of service (QoS) levels to guarantee a certain degree of performance to a data flow:

- **Level 0.** At most once delivery: this is the minimal level and guarantees a best effort delivery. A message won't be acknowledged by the receiver or stored by the sender.
- **Level 1.** At least once delivery: all the messages will be delivered at least once to the receiver. This is the QoS level used in the *Home and Automation Monitoring* system because the overhead is lower than QoS 2 and it guarantees the message arrives at least once. Duplicates are not a problem at all because the user interface would be updated one or more time with the same piece of information and this would be completely unnoticeable by the end user.
- **Level 2.** Exactly once delivery. It is the safest and the slowest quality of service level.

2.2.2 Mosquitto

Mosquitto is an open source message broker that implements the MQTT protocol. It is suitable for both low-power single board computers and powerful servers.

To install the broker, the following command must be run from the Raspberry Pi terminal:

```
sudo apt-get install mosquitto
```

The broker will automatically start whenever the Raspberry is powered up. The next step is adding users and passwords to secure the MQTT connection. The current directory must be `/etc/mosquitto` while typing the successive commands:

```
// Add the first user  
sudo mosquitto_passwd -c passwordfile user  
  
// Add another user to the existing password file  
sudo mosquitto_passwd -b passwordfile other_user password
```

The following two lines must be added to the `mosquitto.conf` file.

```
allow_anonymous false  
password_file /etc/mosquitto/passwordfile
```

As far as this system is concerned, just a single user has been created to manage the MQTT connection: username is `admin` and password is `hamrpi`. These credentials are used to set up MQTT by Node-RED and any ESP node.

2.2.3 Node-RED

TODO: spiegare cos'è ed a cosa serve.

TODO: spiegare come si installa la dashboard (plugin aggiuntivo).

TODO: spiegare come rendere sicuro l'accesso.

TODO: spiegare quali blocchi sono stati utilizzati e immagine finale della UI.

2.2.4 ThingSpeak

TODO: spiegare cos'è ed a cosa serve.

TODO: spiegare come è stato utilizzato in Node-RED.

2.3 Getting Started with ESP Boards

The *Home Automation and Monitoring* system makes use of ESP modules to collect data from sensors and transmit them to the Raspberry Pi taking advantage of MQTT protocol.

Two kinds of boards have been selected to play the role of MQTT client; namely NodeMCU ESP-12E and ESP-32 development kits. The former is based on the widely explored ESP8266 System-On-Chip, which combines WiFi and microcontroller capabilities. The latter utilizes an ESP32 SoC that is very similar, but far more powerful: it has been designed to provide robustness, versatility and reliability in a wide variety of applications.

Both the boards can be easily programmed using the Arduino IDE after installing the appropriate cores via Arduino Boards Manager. The core installation will not be covered by this document.

Please notice that there is not a particular reason to use one specific board or the other: they both can fulfill the requirements of the project. The usage of different boards creates heterogeneity and variety, which are always present in the real world.

2.3.1 ESP-12E: Sensors, Wiring and Code

An accurate picture of the board pinout is shown in Figure 2.4. The ESP8266 module requires 3.3V power supply. Luckily the board provides a voltage regulator and can be connected to 5V using microUSB connector or *Vin* pin.

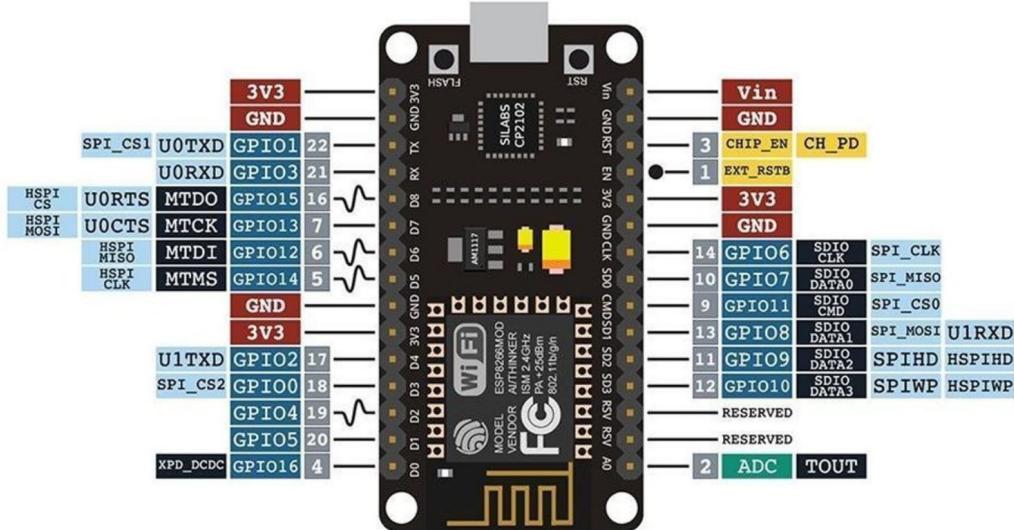


Figure 2.4: ESP-12E pinout.

There is a number of two ESP-12E boards involved in the system. They both have the same configuration, sensors and wiring, but can be deployed in two different areas. In more details, each board takes advantage of temperature, humidity and light sensors.

Status LEDs

Three LEDs give information about the status of the board:

- **Red:** the board is trying to get WiFi access.
- **Yellow:** the board is setting up a MQTT connection. The MQTT broker must be up and running to succeed.
- **Green:** the board is active and it is sending sensor data to the MQTT broker or listening to messages related to its subscriptions.

Temperature and humidity sensor

DHT11 and DTH22 are low cost temperature and humidity sensors. They are made of two parts: a thermistor and a capacitive humidity sensor. A small chip inside performs analog to digital conversion to let any microcontroller read the digital output signal.

Even though the two DHT sensors are interchangeable, DHT22 is more accurate and covers a larger range of temperatures.

Since the system involves two ESP-12E boards, both the sensors are used for the sake of completeness. Moreover, the fact that it is fairly easy to connect up to them, as shown in Figure 2.5, the low cost and ease of interfacing make these sensors an appropriate choice for the system.

Light sensor

A light sensor can be used to detect the current ambient light level, in particular the presence or absence of light. There exist several types of light sensors: photoresistors, phototransistors, photodiodes...

The chosen approach is making use of a photoresistor, taking advantage of the ADC provided by ESP boards.

A photoresistor changes its resistance based on the amount of light that falls upon it: the more the light, the less the resistance. A simple voltage divider can be used to give an input to the ADC, as illustrated by Figure 2.5.

Deep sleep

ESP8266, the core of ESP-12E boards, supports sleeping. While sleeping, the device draws much less power than while awake: this could be a good approach to save power when batteries are the only source of electricity.

Deep sleep is one out of four supported types of sleep mode: everything is off but the Real Time Clock. This is the most power efficient option.

Pin D0 (GPIO 16) needs to be connected to RST to wake up the device when deep sleep is over: whenever RST receives a LOW signal, it restarts the microcontroller. Once the device is in deep sleep mode, a LOW signal will be sent to GPIO 16 as soon as the timer is up.

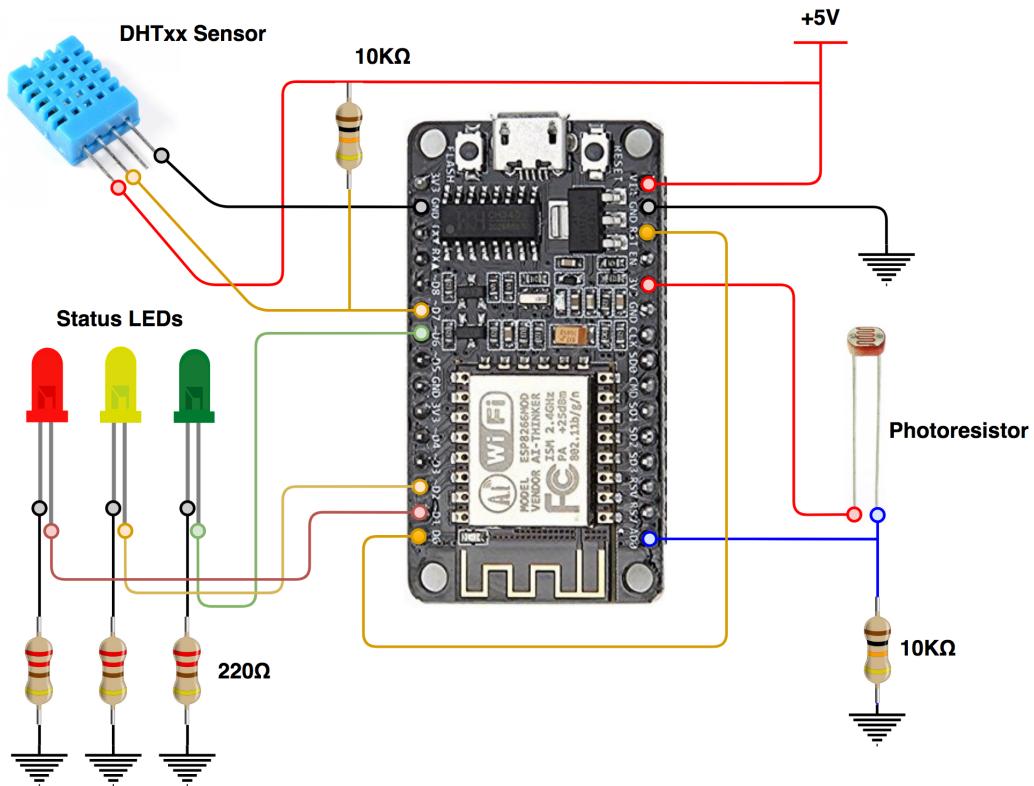


Figure 2.5: ESP-12E schematic with sensors and status LEDs. Notice the wire to tie D0 to RST pin to enable deep sleep.

Code

The main parts of the code are described by the following tables. In more detail, libraries are reported by Table 2.1, define preprocessor directives by Table 2.2, global variables by Table 2.3 and, lastly, functions by Table 2.4.

Library	Description
ESP8266WiFi.h	Required to enable WiFi connectivity.
DHT.h	Required to interface with DHT sensors.
Adafruit_MQTT.h	Required to take advantage of MQTT protocol.
Adafruit_MQTT_Client.h	

Table 2.1: Libraries involved in the sketches for ESP-12E boards.

#define Directive	Description
DEBUG	Enables debug over serial communication.
WLAN_SSID	Name of the WiFi network to connect to.
WLAN_PASS	Password to join the WiFi network.
HOST	MQTT broker IP address.
PORT	MQTT broker port.
USERNAME	Credentials to set up the MQTT connection.
PASSWORD	Credentials to set up the MQTT connection.
SLEEP_TIME	Deep sleep duration.
CONN_ATTEMPTS	Number of attempts to get WiFi connection before entering deep sleep mode.
MQTT_ATTEMPTS	Number of attempts to connect to MQTT service provided by the broker.
DHT_TYPE	Type of DHT sensor.
DHT_PIN	Digital pin to read data coming from DHT sensor.
LED_RED	GPIO that controls the red led.
LED_YELLOW	GPIO in charge of controlling the yellow led.
LED_GREEN	GPIO that controls the green led.

Table 2.2: Define directives specified in the sketches for ESP-12E boards.

Global Variable	Description
client	This object is instantiated to enable WiFi connectivity.
mqtt	This object handles MQTT connection with the broker.
temperature	Objects of type Adafruit_MQTT_Publish in order to send data to the broker. They are initialized with the appropriate topic depending on the node that collects information.
humidity	
light	
dht	Object that represent the DHT temperature and humidity sensor. It is instantiated specifying the type of sensor and the input pin.

Table 2.3: Global variables declared in the sketches for ESP-12E boards.

Function	Description
void setup()	Calls functions to establish WiFi connection and set up MQTT. It publishes data and enters deep sleep state.
void loop()	This function is not required since deep sleep is enabled. Every time the ESP-12E board restarts, the setup function is executed and deep sleep state is entered.
void enterDeepSleep()	Turns off LEDs and WiFi and enters deep sleep state.
void MQTT_connect()	Connects to MQTT service provided by the MQTT broker.
void ledOff()	Turns off the status LEDs.
void ledRed()	Turns on the red LED.
void ledYellow()	Turns on the yellow LED.
void ledGreen()	Turns on the green LED.

Table 2.4: Functions used in the sketches for ESP-12E boards.

2.3.2 ESP-32: Sensors, Wiring and Code

An accurate picture of the board pinout is shown in Figure 2.6. As for ESP8266, also ESP32 requires 3.3V to operate. The board is provided with a voltage regulator and can be powered up by an external power source through USB connection or *Vin* pin.

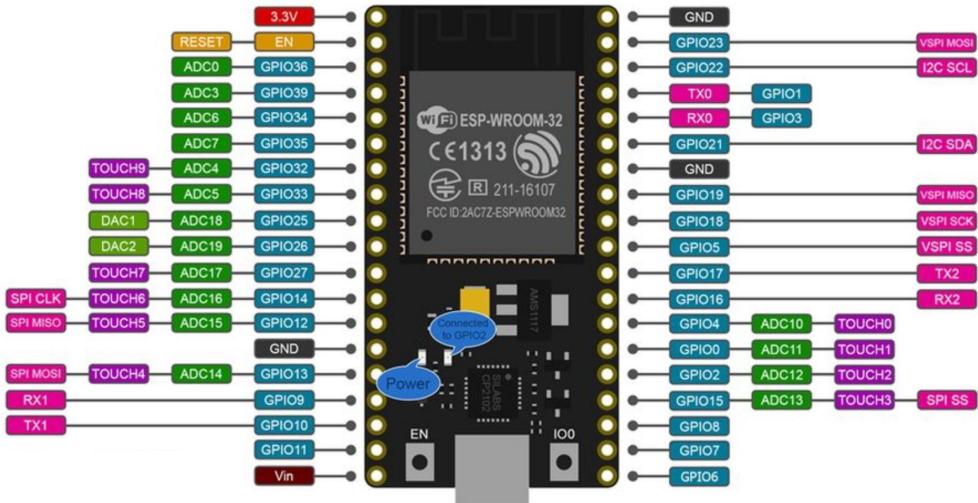


Figure 2.6: ESP-32 pinout. Notice the presence of multiple ADC pins, in contrast with the only one offered by ESP-12E boards.

Just a single board of this type is involved in the system. It is hooked up to a light sensor and to a relay module. The board does not take advantage of deep sleep functionality because it needs to be always up and running in order to reduce the latency to switch on and off the relay.

Status LEDs

Three LEDs fit out information about the status of the board. They work exactly as for ESP-12E boards: make reference to subsection 2.3.1.

Light sensor

A photoresistor and a voltage divider are used to provide light intensity information. The operating principle is the same as for ESP-12E boards: please, make reference to subsection 2.3.1.

Relay module

A relay is an electrical switch operated by an electromagnet. Relays are usually used to control a high voltage circuit with a low power one. A microcontroller can drive relays with one of its digital pins: this is exactly what ESP32 is used for.

The advanced WiFi connectivity of the board gives the possibility to remotely control the digital pin hooked to the relay module turning it into a remote switch.

As mentioned earlier, in order to reduce the latency to turn on and off the relay, the module is always active and does not enter any sleep state.

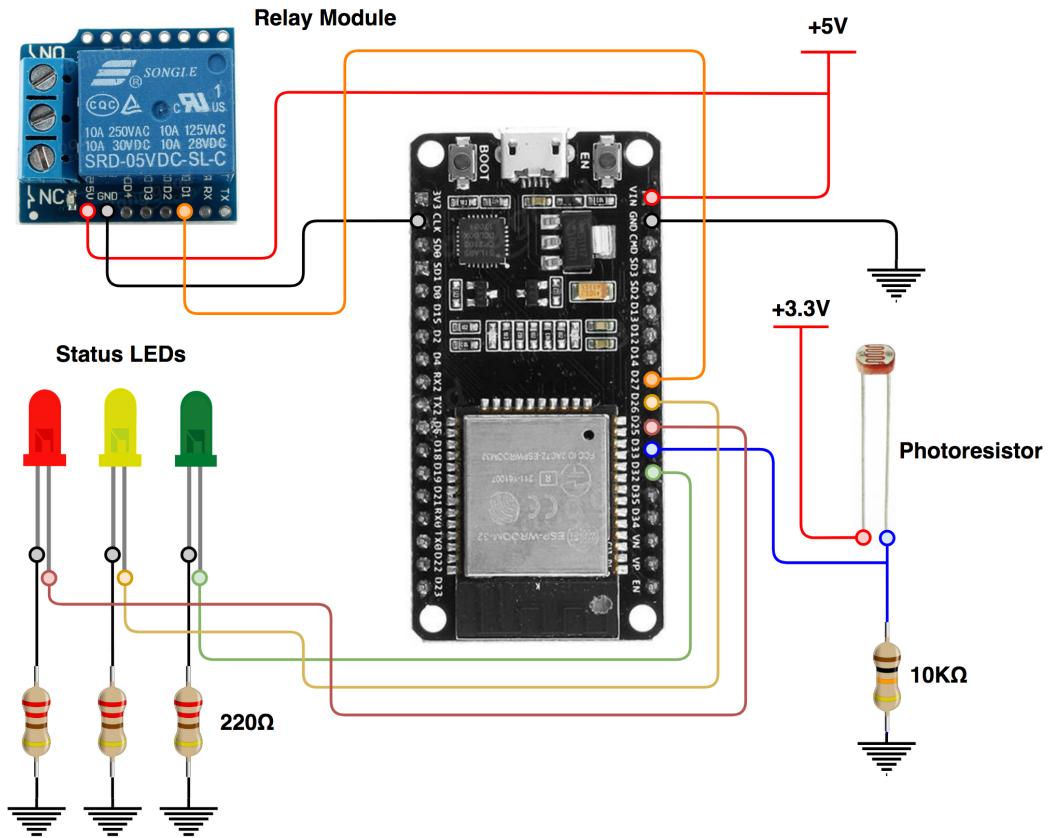


Figure 2.7: ESP-32 schematic with sensors, actuators and status LEDs.

Code

As for ESP-12 boards, the main parts of the code are described by the following tables. In more detail, libraries are reported by Table 2.5, define pre-processor directives by Table 2.6, global variables by Table 2.7 and, lastly, functions by Table 2.8.

Library	Description
WiFi.h	Required to enable WiFi connectivity.
Adafruit_MQTT.h	Required to deal with MQTT protocol.
Adafruit_MQTT_Client.h	

Table 2.5: Libraries involved in the sketch for ESP-32 board.

#define Directive	Description
DEBUG	Enables debug over serial communication.
WLAN_SSID	Name of the WiFi network to connect to.
WLAN_PASS	Password to join the WiFi network.
HOST	MQTT broker IP address.
PORT	MQTT broker port.
USERNAME	Credentials to set up the MQTT connection.
PASSWORD	Credentials to set up the MQTT connection.
LED_RED	GPIO that controls the red led.
LED_YELLOW	GPIO in charge of controlling the yellow led.
LED_GREEN	GPIO that controls the green led.
LIGHT_ADC	GPIO that provides ADC functionality to sample the analog voltage coming from the photoresistor.
SWITCH_PIN	GPIO to switch on and off the relay module.
WAIT_TIME	Interval of time to listen to subscription messages.

Table 2.6: Define directives specified in the sketch for ESP-32 board.

Global Variable	Description
client	This object is instantiated to enable WiFi connectivity.
mqtt	This object handles MQTT connection with the broker.
light	Object of type Adafruit_MQTT_Publish in order to send light intensity data to the broker.
toggle_switch	Object of type Adafruit_MQTT_Subscribe to listen to MQTT messages to enable and disable the relay module.
sw_status	Keeps the status of the relay module.

Table 2.7: Global variables declared in the sketch for ESP-32 board.

Function	Description
void setup()	Calls functions to establish WiFi connection and set up MQTT.
void loop()	Publishes data about light intensity and listens to messages related to the relay status for WAIT_TIME milliseconds.
void MQTT_connect()	Connects to MQTT service provided by the MQTT broker.
void toggleSwitch()	Flips the status (active/inactive) of the relay module.
void ledOff()	Turns off the status LEDs.
void ledRed()	Turns on the red LED.
void ledYellow()	Turns on the yellow LED.
void ledGreen()	Turns on the green LED.

Table 2.8: Functions used in the sketch for ESP-32 board.

Section 3

System Deployment

3.1 Work Environment Example

The following is a deployment example of the system that has been previously described. TODO: esempio di deployment con immagine casa.

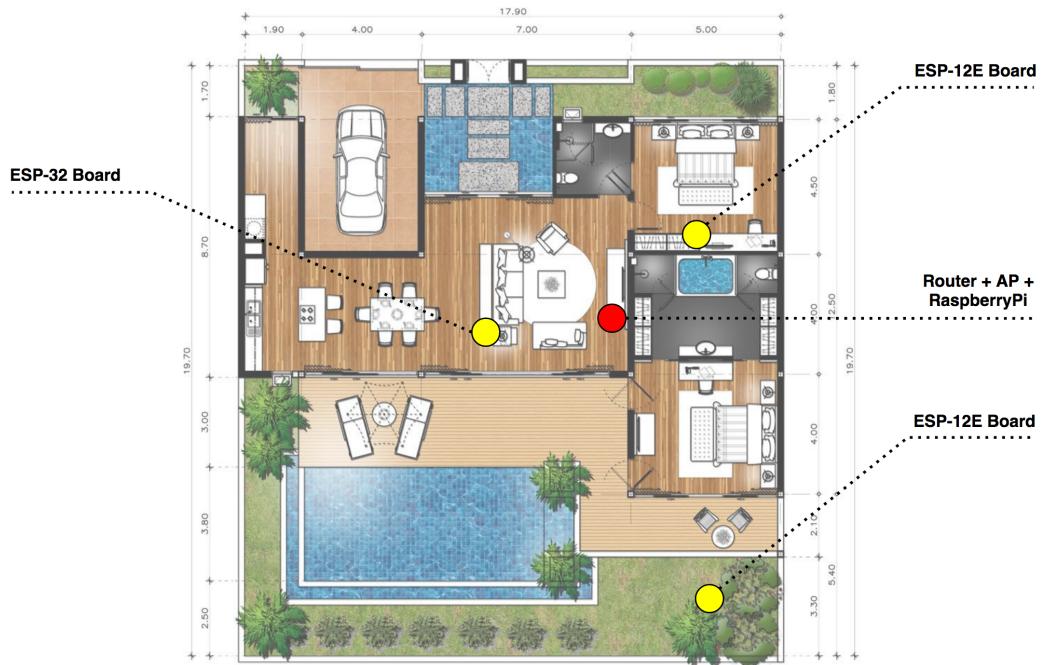


Figure 3.1: Blueprint of a typical house showing the position of all the system nodes.

3.2 Future Extensions

The system implementation opens the possibility of including new features. For example:

- The possibility of adding more boards to cover larger areas and collect more information about the surrounding environment;
- The possibility of using different sensors in addition to the simple temperature, humidity and light ones of the current implementation.
- The possibility of using *energy harvesting* to derive energy from external sources, such as solar power and wind energy.